

**TEST REPORT ADDENDUM – CONDUCTED**

FROM



Test of: Aruba Networks, Inc. APIN0334, APIN0335

to

To: FCC Subpart C 15.247 (DTS) & IC RSS-247

Test Report Serial No.: ARUB196-U3\_Conducted Rev A

Issue Date: 6<sup>th</sup> May 2016

Master Document Number	Addendum Reports
ARUB196-U3_Master	ARUB196-U3_Conducted
	ARUB196-U3_Radiated
	ARUB196-U26 (FCC Part 15B & ICES-003)



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 2 of 223

---

## Table of Contents

<b>1. MEASUREMENT AND PRESENTATION OF TEST DATA .....</b>	<b>3</b>
<b>2. TEST RESULTS .....</b>	<b>4</b>
2.1. 6 dB & 99% Bandwidth .....	4
2.2. Conducted Output Power .....	9
2.3. Emissions .....	15
2.3.1. <i>Conducted Emissions</i> .....	15
2.3.1.1. Conducted Spurious Emissions .....	15
2.3.1.2. Conducted Band-Edge Emissions .....	20
2.4. Power Spectral Density .....	28
<b>APPENDIX A - GRAPHICAL IMAGES .....</b>	<b>33</b>
A.1. 6 dB & 99% Bandwidth .....	34
A.2. Emissions .....	82
A.2.1. <i>Conducted Emissions</i> .....	82
A.2.1.1. Conducted Spurious Emissions .....	82
A.2.1.2. Conducted Band-Edge Emissions .....	130
A.3. Power Spectral Density .....	162

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

## 1. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Testing and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for regulatory compliance.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 4 of 223

## 2. TEST RESULTS

### 2.1. 6 dB & 99% Bandwidth

Conducted Test Conditions for 6 dB and 99% Bandwidth			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	6 dB and 99 % Bandwidth	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (a)(2)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for 6 dB and 99% Bandwidth Measurement

The bandwidth at 6 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

#### Limits for 6 dB and 99% Bandwidth

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(2) Systems using digital modulation techniques may operate in the 902-928 MHz and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 5 of 223

**Equipment Configuration for 6 dB & 99% Bandwidth**

<b>Variant:</b>	802.11b	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	2
<b>Modulation:</b>	CCK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
	MHz	a	b	c			d	KHz
2412.0	<a href="#">8.096</a>	<a href="#">8.096</a>	<a href="#">8.096</a>	<a href="#">7.535</a>	8.096	7.535	≥500.0	-7.04
2437.0	<a href="#">8.577</a>	<a href="#">8.577</a>	<a href="#">9.058</a>	<a href="#">8.497</a>	9.058	8.497	≥500.0	-8.00
2462.0	<a href="#">8.096</a>	<a href="#">8.577</a>	<a href="#">8.096</a>	<a href="#">8.016</a>	8.577	8.016	≥500.0	-7.52

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
	MHz	a	b	c	d		
2412.0	<a href="#">12.745</a>	<a href="#">12.906</a>	<a href="#">12.585</a>	<a href="#">12.665</a>	12.906		
2437.0	<a href="#">13.066</a>	<a href="#">13.146</a>	<a href="#">13.387</a>	<a href="#">13.146</a>	13.387		
2462.0	<a href="#">12.745</a>	<a href="#">12.745</a>	<a href="#">12.745</a>	<a href="#">12.665</a>	12.745		

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 6 of 223

**Equipment Configuration for 6 dB & 99% Bandwidth**

<b>Variant:</b>	802.11g	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	2
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
	MHz	a	b	c			d	KHz
2412.0	<a href="#">16.273</a>	<a href="#">16.273</a>	<a href="#">16.273</a>	<a href="#">16.353</a>	16.353	16.273	≥500.0	-15.77
2437.0	<a href="#">16.353</a>	<a href="#">16.353</a>	<a href="#">16.353</a>	<a href="#">16.353</a>	16.353	16.353	≥500.0	-15.85
2462.0	<a href="#">16.353</a>	<a href="#">16.273</a>	<a href="#">16.273</a>	<a href="#">16.353</a>	16.353	16.273	≥500.0	-15.77

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
	MHz	a	b	c	d		
2412.0	<a href="#">16.353</a>	<a href="#">16.353</a>	<a href="#">16.353</a>	<a href="#">16.353</a>	16.353		
2437.0	<a href="#">16.513</a>	<a href="#">16.593</a>	<a href="#">16.593</a>	<a href="#">16.513</a>	16.593		
2462.0	<a href="#">16.353</a>	<a href="#">16.353</a>	<a href="#">16.353</a>	<a href="#">16.353</a>	16.353		

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 7 of 223

**Equipment Configuration for 6 dB & 99% Bandwidth**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	3.9
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	3.00
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
	MHz	a	b	c			d	KHz
2412.0	<a href="#">17.154</a>	<a href="#">17.555</a>	<a href="#">17.555</a>	<a href="#">17.154</a>	17.555	17.154	≥500.0	-16.65
2437.0	<a href="#">17.315</a>	<a href="#">17.154</a>	<a href="#">17.555</a>	<a href="#">16.914</a>	17.555	16.914	≥500.0	-16.41
2462.0	<a href="#">17.555</a>	<a href="#">17.154</a>	<a href="#">17.555</a>	<a href="#">17.555</a>	17.555	17.154	≥500.0	-16.65

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
	MHz	a	b	c	d		
2412.0	<a href="#">17.555</a>	<a href="#">17.555</a>	<a href="#">17.555</a>	<a href="#">17.555</a>	17.555		
2437.0	<a href="#">17.635</a>	<a href="#">17.635</a>	<a href="#">17.635</a>	<a href="#">17.635</a>	17.635		
2462.0	<a href="#">17.555</a>	<a href="#">17.555</a>	<a href="#">17.555</a>	<a href="#">17.555</a>	17.555		

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 8 of 223

**Equipment Configuration for 6 dB & 99% Bandwidth**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	97
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	3.9
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	3.00
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
	MHz	a	b	c			d	KHz
2422.0	<a href="#">35.431</a>	<a href="#">35.110</a>	<a href="#">35.271</a>	<a href="#">35.110</a>	35.431	35.110	≥500.0	-34.61
2437.0	<a href="#">35.431</a>	<a href="#">35.110</a>	<a href="#">35.110</a>	<a href="#">35.110</a>	35.431	35.110	≥500.0	-34.61
2452.0	<a href="#">35.110</a>	<a href="#">35.271</a>	<a href="#">35.271</a>	<a href="#">35.110</a>	35.271	35.110	≥500.0	-34.61

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
	MHz	a	b	c	d		
2422.0	<a href="#">36.072</a>	<a href="#">36.072</a>	<a href="#">36.072</a>	<a href="#">36.072</a>	36.072		
2437.0	<a href="#">36.393</a>	<a href="#">36.393</a>	<a href="#">36.393</a>	<a href="#">36.393</a>	36.393		
2452.0	<a href="#">36.072</a>	<a href="#">36.072</a>	<a href="#">36.072</a>	<a href="#">36.072</a>	36.072		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





## 2.2. Conducted Output Power

Conducted Test Conditions for Fundamental Emission Output Power			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Output Power	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (b) & (c)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

Test Procedure for Fundamental Emission Output Power Measurement  
In the case of average power measurements an average power sensor was utilized.

For peak power measurements the spectrum analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth.

Testing was performed under ambient conditions at nominal voltage only. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured, summed ( $\Sigma$ ) and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.  
Supporting Information  
Calculated Power =  $A + G + Y + 10 \log(1/x)$  dBm

A = Total Power [ $10^a \cdot \text{Log}_{10}(10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$ ]  
G = Antenna Gain  
Y = Beamforming Gain  
x = Duty Cycle (average power measurements only)

**Limits for Fundamental Emission Output Power**  
(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following for non-frequency hopping systems:

(3) For systems using digital modulation in the 902-928 MHz and 2400-2483.5 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(iii) Fixed, point-to-point operation, as used in paragraphs (c)(1)(i) and (c)(1)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 10 of 223

---

instructions informing the operator and the installer of this responsibility.

(2) In addition to the provisions in paragraphs (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400-2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:

(i) Different information must be transmitted to each receiver.

(ii) If the transmitter employs an antenna system that emits multiple directional beams but does not do emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:

(A) The directional gain shall be calculated as the sum of  $10 \log$  (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.

(B) A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.

(iii) If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.

(iv) Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 11 of 223

**Equipment Configuration for Average Output Power**

<b>Variant:</b>	802.11b	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	2.0
<b>Modulation:</b>	CCK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Output Power + DCCF (+0.04 dB) (dBm)				Calculated Total Power $\Sigma$ Port(s)	Limit	Margin	EUT Power Setting
	a	b	c	d				
2412.0	16.70	16.04	16.96	16.87	22.68	30.00	-7.32	18.00
2437.0	18.97	18.60	19.40	19.01	25.02	30.00	-4.98	21.00
2462.0	15.26	15.26	16.18	14.69	21.40	30.00	-8.60	18.00

<b>Traceability to Industry Recognized Test Methodologies</b>	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	$\pm 1.33$ dB

DCCF - Duty Cycle Correction Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 12 of 223

**Equipment Configuration for Average Output Power**

<b>Variant:</b>	802.11g	<b>Duty Cycle (%):</b>	100.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	2.0
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Output Power + DCCF (+0 dB) (dBm)				Calculated Total Power $\Sigma$ Port(s)	Limit	Margin	EUT Power Setting
	a	b	c	d				
MHz					dBm	dBm	dB	
2412.0	13.82	13.16	14.03	14.00	19.79	30.00	-10.21	15.00
2437.0	19.21	18.93	19.55	19.11	25.22	30.00	-4.78	21.00
2462.0	13.25	13.14	13.92	12.45	19.24	30.00	-10.76	15.50

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	$\pm 1.33$ dB

DCCF - Duty Cycle Correction Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 13 of 223

**Equipment Configuration for Average Output Power**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	3.00
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Output Power + DCCF (+0.04 dB) (dBm)				Calculated Total Power $\Sigma$ Port(s) dBm	Limit dBm	Margin dB	EUT Power Setting
	a	b	c	d				
2412.0	14.04	13.53	14.34	14.25	20.08	30.00	-9.92	15.50
2437.0	18.90	18.62	19.34	18.90	24.97	30.00	-5.03	21.00
2462.0	12.95	12.79	13.53	12.17	18.91	30.00	-11.09	15.50

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	$\pm 1.33$ dB

DCCF - Duty Cycle Correction Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 14 of 223

**Equipment Configuration for Average Output Power**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	97.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.60
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	3.00
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Output Power + DCCF (+0.13 dB) (dBm)				Calculated Total Power $\Sigma$ Port(s) dBm	Limit dBm	Margin dB	EUT Power Setting
	Port(s)							
MHz	a	b	c	d				
2422.0	10.46	9.93	10.62	10.24	16.34	30.00	-13.66	12.00
2437.0	19.13	18.73	19.55	18.95	25.12	30.00	-4.88	21.00
2452.0	10.70	10.28	11.23	9.98	16.60	30.00	-13.40	13.00

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	$\pm 1.33$ dB

DCCF - Duty Cycle Correction Factor

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 15 of 223

## 2.3. Emissions

### 2.3.1. Conducted Emissions

#### 2.3.1.1. Conducted Spurious Emissions

Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Max Unwanted Emission Levels	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (d)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

#### Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement

Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 30 dBc (average detector) or 20 dBc (peak detector) below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

#### Limits Transmitter Conducted Spurious and Band-Edge Emissions

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 16 of 223

**Equipment Configuration for Transmitter Conducted Spurious Emissions**

<b>Variant:</b>	802.11b	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	2.0
<b>Modulation:</b>	CCK	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
<a href="#">2412.0</a>	30.0 - 26000.0	<a href="#">-68.663</a>	-47.00	<a href="#">-68.663</a>	-48.00	<a href="#">-68.663</a>	-47.00	<a href="#">-68.663</a>	-47.00
<a href="#">2437.0</a>	30.0 - 26000.0	<a href="#">-68.663</a>	-45.00	<a href="#">-67.504</a>	-45.00	<a href="#">-67.504</a>	-44.00	<a href="#">-68.663</a>	-44.00
<a href="#">2462.0</a>	30.0 - 26000.0	<a href="#">-68.663</a>	-48.00	<a href="#">-67.504</a>	-48.00	<a href="#">-67.504</a>	-47.00	<a href="#">-68.663</a>	-49.00

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 17 of 223

**Equipment Configuration for Transmitter Conducted Spurious Emissions**

<b>Variant:</b>	802.11g	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	2.0
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
<a href="#">2412.0</a>	30.0 - 26000.0	<a href="#">-68.663</a>	-49.00	<a href="#">-68.663</a>	-49.00	<a href="#">-67.504</a>	-48.00	<a href="#">-68.663</a>	-49.00
<a href="#">2437.0</a>	30.0 - 26000.0	<a href="#">-68.663</a>	-43.00	<a href="#">-67.504</a>	-43.00	<a href="#">-67.504</a>	-42.00	<a href="#">-68.663</a>	-43.00
<a href="#">2462.0</a>	30.0 - 26000.0	<a href="#">-68.663</a>	-49.00	<a href="#">-67.504</a>	-49.00	<a href="#">-67.504</a>	-48.00	<a href="#">-68.663</a>	-49.00

**Traceability to Industry Recognized Test Methodologies**

<b>Work Instruction:</b>	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
<b>Measurement Uncertainty:</b>	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 18 of 223

**Equipment Configuration for Transmitter Conducted Spurious Emissions**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.6
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	3.0
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
<a href="#">2412.0</a>	30.0 - 26000.0	<a href="#">-68.663</a>	-48.00	<a href="#">-67.504</a>	-49.00	<a href="#">-67.504</a>	-48.00	<a href="#">-68.663</a>	-48.00
<a href="#">2437.0</a>	30.0 - 26000.0	<a href="#">-68.663</a>	-43.00	<a href="#">-67.504</a>	-43.00	<a href="#">-67.504</a>	-42.00	<a href="#">-68.663</a>	-43.00
<a href="#">2462.0</a>	30.0 - 26000.0	<a href="#">-68.663</a>	-49.00	<a href="#">-67.504</a>	-49.00	<a href="#">-67.504</a>	-48.00	<a href="#">-67.504</a>	-49.00

**Traceability to Industry Recognized Test Methodologies**

<b>Work Instruction:</b>	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
<b>Measurement Uncertainty:</b>	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 19 of 223

**Equipment Configuration for Transmitter Conducted Spurious Emissions**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	97
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.6
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	3.0
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
<a href="#">2422.0</a>	30.0 - 26000.0	<a href="#">-68.663</a>	-54.00	<a href="#">-68.663</a>	-54.00	<a href="#">-67.504</a>	-53.00	<a href="#">-68.663</a>	-54.00
<a href="#">2437.0</a>	30.0 - 26000.0	<a href="#">-68.663</a>	-40.00	<a href="#">-67.504</a>	-40.00	<a href="#">-67.504</a>	-40.00	<a href="#">-68.663</a>	-40.00
<a href="#">2452.0</a>	30.0 - 26000.0	<a href="#">-68.663</a>	-48.00	<a href="#">-67.504</a>	-49.00	<a href="#">-67.504</a>	-48.00	<a href="#">-68.663</a>	-49.00

**Traceability to Industry Recognized Test Methodologies**

<b>Work Instruction:</b>	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
<b>Measurement Uncertainty:</b>	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 20 of 223

### 2.3.1.2. Conducted Band-Edge Emissions

#### Equipment Configuration for Conducted Low Band-Edge Emissions - Average

<b>Variant:</b>	802.11b	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	2.00
<b>Modulation:</b>	CCK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

#### Test Measurement Results

<b>Channel Frequency:</b>	2412.0 MHz					
<b>Band-Edge Frequency:</b>	2400.0 MHz					
<b>Test Frequency Range:</b>	2350.0 - 2422.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin (MHz)
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	
a	<a href="#">-54.54</a>	-31.00	2403.20			-3.200
b	<a href="#">-54.44</a>	-31.00	2403.40			-3.400
c	<a href="#">-52.09</a>	-30.00	2403.40			-3.400
d	<a href="#">-53.36</a>	-30.00	2403.40			-3.400

#### Traceability to Industry Recognized Test Methodologies

<b>Work Instruction:</b>	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
<b>Measurement Uncertainty:</b>	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 21 of 223

**Equipment Configuration for Conducted Low Band-Edge Emissions - Average**

<b>Variant:</b>	802.11g	<b>Duty Cycle (%):</b>	100.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	2.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	2412.0 MHz					
<b>Band-Edge Frequency:</b>	2400.0 MHz					
<b>Test Frequency Range:</b>	2350.0 - 2422.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin (MHz)
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	
a	<a href="#">-53.46</a>	-37.00	2402.10			-2.100
b	<a href="#">-51.12</a>	-38.00	2401.90			-1.900
c	<a href="#">-53.06</a>	-37.00	2402.10			-2.100
d	<a href="#">-53.36</a>	-37.00	2402.10			-2.100

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 22 of 223

**Equipment Configuration for Conducted High Band-Edge Emissions - Average**

<b>Variant:</b>	802.11b	<b>Duty Cycle (%):</b>	100.0
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	2.00
<b>Modulation:</b>	CCK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	2462.0 MHz					
<b>Band-Edge Frequency:</b>	2483.5 MHz					
<b>Test Frequency Range:</b>	2452.0 - 2524.0 MHz					
<b>Port(s)</b>	<b>Band-Edge Markers and Limit</b>			<b>Revised Limit</b>		<b>Margin</b>
	<b>M3 Amplitude (dBm)</b>	<b>Plot Limit (dBm)</b>	<b>M2 Frequency (MHz)</b>	<b>Amplitude (dBm)</b>	<b>M2A Frequency (MHz)</b>	<b>(MHz)</b>
<b>a</b>	<a href="#">-72.05</a>	-32.00	2470.50			-13.000
<b>b</b>	<a href="#">-71.75</a>	-32.00	2470.50			-13.000
<b>c</b>	<a href="#">-68.22</a>	-31.00	2470.60			-12.900
<b>d</b>	<a href="#">-71.95</a>	-32.00	2470.30			-13.200

<b>Traceability to Industry Recognized Test Methodologies</b>	
<b>Work Instruction:</b>	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
<b>Measurement Uncertainty:</b>	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 23 of 223

**Equipment Configuration for Conducted High Band-Edge Emissions - Average**

<b>Variant:</b>	802.11g	<b>Duty Cycle (%):</b>	98.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	2.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	2462.0 MHz					
<b>Band-Edge Frequency:</b>	2483.5 MHz					
<b>Test Frequency Range:</b>	2452.0 - 2524.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin (MHz)
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	
a	<a href="#">-68.52</a>	-38.00	2471.80			-11.700
b	<a href="#">-63.79</a>	-38.00	2471.60			-11.900
c	<a href="#">-65.72</a>	-37.00	2471.60			-11.900
d	<a href="#">-65.92</a>	-38.00	2471.60			-11.900

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 24 of 223

**Equipment Configuration for Conducted Low Band-Edge Emissions - Average**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.6
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	3.0
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	2412.0 MHz					
<b>Band-Edge Frequency:</b>	2400.0 MHz					
<b>Test Frequency Range:</b>	2350.0 - 2422.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin (MHz)
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	
a	<a href="#">-50.11</a>	-37.00	2401.50			-1.500
b	<a href="#">-50.36</a>	-38.00	2401.50			-1.500
c	<a href="#">-50.43</a>	-36.00	2401.80			-1.800
d	<a href="#">-48.72</a>	-37.00	2401.50			-1.500

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 25 of 223

**Equipment Configuration for Conducted Low Band-Edge Emissions - Average**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	97.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.6
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	3.0
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	2422.0 MHz					
<b>Band-Edge Frequency:</b>	2400.0 MHz					
<b>Test Frequency Range:</b>	2292.0 - 2442.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin (MHz)
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	
a	<a href="#">-62.50</a>	-45.00	2401.70			-1.700
b	<a href="#">-62.40</a>	-45.00	2402.00			-2.000
c	<a href="#">-62.10</a>	-44.00	2402.00			-2.000
d	<a href="#">-61.06</a>	-45.00	2402.00			-2.000

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 26 of 223

Equipment Configuration for Conducted High Band-Edge Emissions - Average			
<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.6
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	3.0
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

<b>Test Measurement Results</b>
---------------------------------

<b>Channel Frequency:</b>	2462.0 MHz					
<b>Band-Edge Frequency:</b>	2483.5 MHz					
<b>Test Frequency Range:</b>	2452.0 - 2524.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin (MHz)
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	
a	<a href="#">-66.02</a>	-38.00	2472.20			-11.300
b	<a href="#">-65.72</a>	-38.00	2472.10			-11.400
c	<a href="#">-65.72</a>	-37.00	2472.10			-11.400
d	<a href="#">-65.92</a>	-39.00	2472.30			-11.200

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 27 of 223

**Equipment Configuration for Conducted High Band-Edge Emissions - Average**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	97.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.6
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	3.0
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

<b>Channel Frequency:</b>	2452.0 MHz					
<b>Band-Edge Frequency:</b>	2483.5 MHz					
<b>Test Frequency Range:</b>	2432.0 - 2582.0 MHz					
Port(s)	Band-Edge Markers and Limit			Revised Limit		Margin (MHz)
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)	
a	<a href="#">-14.77</a>	-44.00	2471.70			-11.800
b	<a href="#">-60.86</a>	-45.00	2472.00			-11.500
c	<a href="#">-62.20</a>	-43.00	2471.70			-11.800
d	<a href="#">-62.40</a>	-44.00	2471.70			-11.800

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



## 2.4. Power Spectral Density

Conducted Test Conditions for Power Spectral Density			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Power Spectral Density	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (e)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	See Normative References		

### Test Procedure for Power Spectral Density

The transmitter output was connected to a spectrum analyzer and the measured made in a 3 kHz resolution bandwidth using the analyzer auto-coupled sweep-time. A peak value was found over the full emission bandwidth and the spectrum downloaded for post processing purposes.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. The Peak Power Spectral Density is the highest level found across the emission bandwidth. With multiple antenna port measurements the numerical analyzer data from each port is summed (à) and a link to this additional graphic is provided.

Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with multiple transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were post processed and the resulting numerical and graphical data presented.

### NOTE:

It may be observed that the spectrum in some antenna port plots break the limit line however this in itself does NOT constitute a failure. In all cases a spectrum summation plot is provided in order to prove compliance. A failure occurs only after the summation of all spectrum plots have been summed and are found to be greater than the limit line.

### Supporting Information

Calculated Power =  $A + 10 \log (1/x)$  dBm

A = Total Power Spectral Density [ $10 \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$ ]

x = Duty Cycle

### Limits Power Spectral Density

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 29 of 223

**Equipment Configuration for Power Spectral Density - Average**

<b>Variant:</b>	802.11b	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	1.00 MBit/s	<b>Antenna Gain (dBi):</b>	2.00
<b>Modulation:</b>	CCK	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/3KHz)						
MHz	a	b	c	d	dBm/3KHz	dBm/3KHz	dB
2412.0	<a href="#">-16.015</a>	<a href="#">-16.797</a>	<a href="#">-15.633</a>	<a href="#">-16.262</a>	<a href="#">-8.897</a>	8.0	-16.9
2437.0	<a href="#">-13.311</a>	<a href="#">-14.135</a>	<a href="#">-13.204</a>	<a href="#">-13.287</a>	<a href="#">-7.866</a>	8.0	-15.9
2462.0	<a href="#">-17.310</a>	<a href="#">-17.291</a>	<a href="#">-16.080</a>	<a href="#">-17.482</a>	<a href="#">-11.198</a>	8.0	-19.2

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 30 of 223

**Equipment Configuration for Power Spectral Density - Average**

<b>Variant:</b>	802.11g	<b>Duty Cycle (%):</b>	100.0
<b>Data Rate:</b>	6.00 MBit/s	<b>Antenna Gain (dBi):</b>	2.00
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	Not Applicable
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0 dB)	Limit	Margin
	Port(s) (dBm/3KHz)						
MHz	a	b	c	d	dBm/3KHz	dBm/3KHz	dB
2412.0	<a href="#">-21.622</a>	<a href="#">-22.333</a>	<a href="#">-21.438</a>	<a href="#">-21.622</a>	<a href="#">-16.021</a>	8.0	-24.0
2437.0	<a href="#">-16.482</a>	<a href="#">-16.779</a>	<a href="#">-15.119</a>	<a href="#">-15.966</a>	<a href="#">-10.389</a>	8.0	-18.4
2462.0	<a href="#">-22.133</a>	<a href="#">-22.003</a>	<a href="#">-21.438</a>	<a href="#">-22.133</a>	<a href="#">-16.259</a>	8.0	-24.3

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 31 of 223

**Equipment Configuration for Power Spectral Density - Average**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	99.0
<b>Data Rate:</b>	6.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.6
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	3.0
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/3KHz)						
MHz	a	b	c	d	dBm/3KHz	dBm/3KHz	dB
2412.0	<a href="#">-21.874</a>	<a href="#">-21.938</a>	<a href="#">-21.530</a>	<a href="#">-21.408</a>	<a href="#">-16.025</a>	8.0	-24.0
2437.0	<a href="#">-16.673</a>	<a href="#">-16.941</a>	<a href="#">-16.229</a>	<a href="#">-16.603</a>	<a href="#">-11.028</a>	8.0	-19.0
2462.0	<a href="#">-22.503</a>	<a href="#">-22.333</a>	<a href="#">-22.035</a>	<a href="#">-22.782</a>	<a href="#">-16.859</a>	8.0	-24.9

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 32 of 223

**Equipment Configuration for Power Spectral Density - Average**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	97.0
<b>Data Rate:</b>	13.50 MBit/s	<b>Antenna Gain (dBi):</b>	2.6
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y)(dB):</b>	3.0
<b>TPC:</b>	Not Applicable	<b>Tested By:</b>	SB
<b>Engineering Test Notes:</b>			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Amplitude Summation + DCCF (+0.13 dB)	Limit	Margin
	Port(s) (dBm/3KHz)						
MHz	a	b	c	d	dBm/3KHz	dBm/3KHz	dB
2422.0	<a href="#">-29.054</a>	<a href="#">-29.276</a>	<a href="#">-28.627</a>	<a href="#">-29.128</a>	<a href="#">-23.049</a>	8.0	-31.1
2437.0	<a href="#">-20.116</a>	<a href="#">-20.851</a>	<a href="#">-19.834</a>	<a href="#">-20.143</a>	<a href="#">-14.295</a>	8.0	-22.3
2452.0	<a href="#">-28.697</a>	<a href="#">-28.697</a>	<a href="#">-28.023</a>	<a href="#">-28.982</a>	<a href="#">-22.691</a>	8.0	-30.7

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 33 of 223

---

## **APPENDIX A - GRAPHICAL IMAGES**

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




### A.1. 6 dB & 99% Bandwidth



#### 6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2412.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

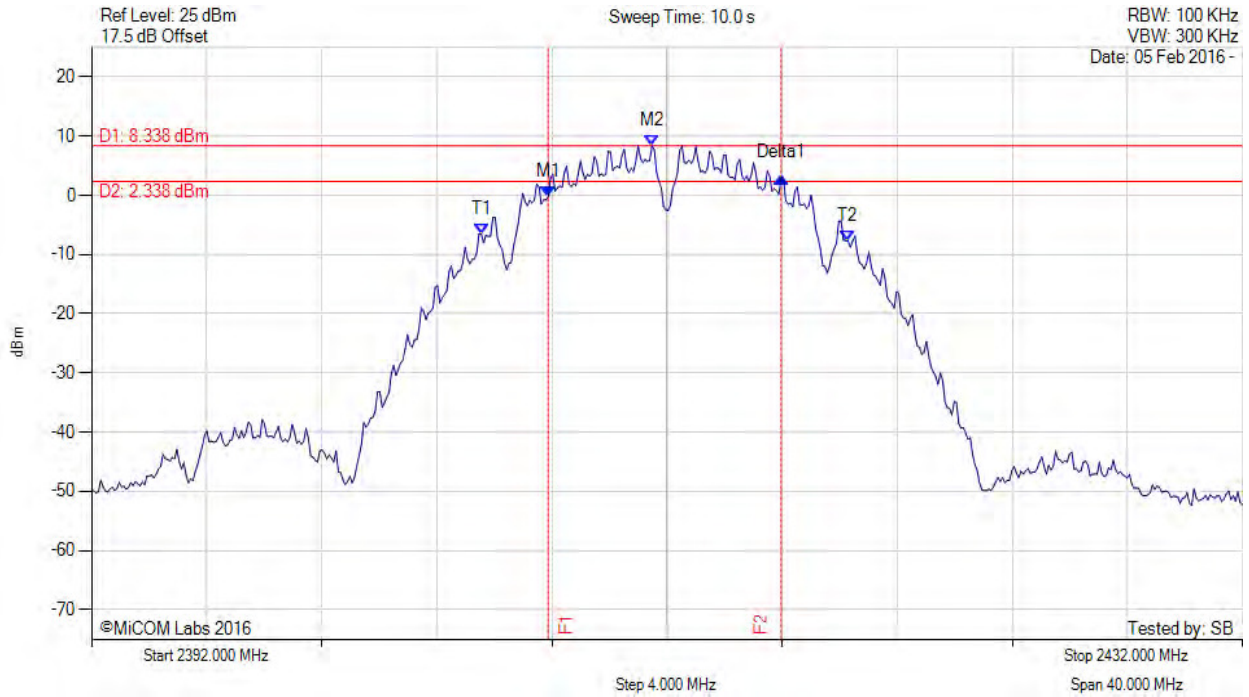

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2407.872 MHz : -0.267 dBm M2 : 2411.479 MHz : 8.338 dBm Delta1 : 8.096 MHz : 3.197 dB T1 : 2405.547 MHz : -6.543 dBm T2 : 2418.293 MHz : -7.719 dBm OBW : 12.745 MHz	Measured 6 dB Bandwidth: 8.096 MHz Limit: ≥500.0 kHz Margin: -7.60 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11b, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

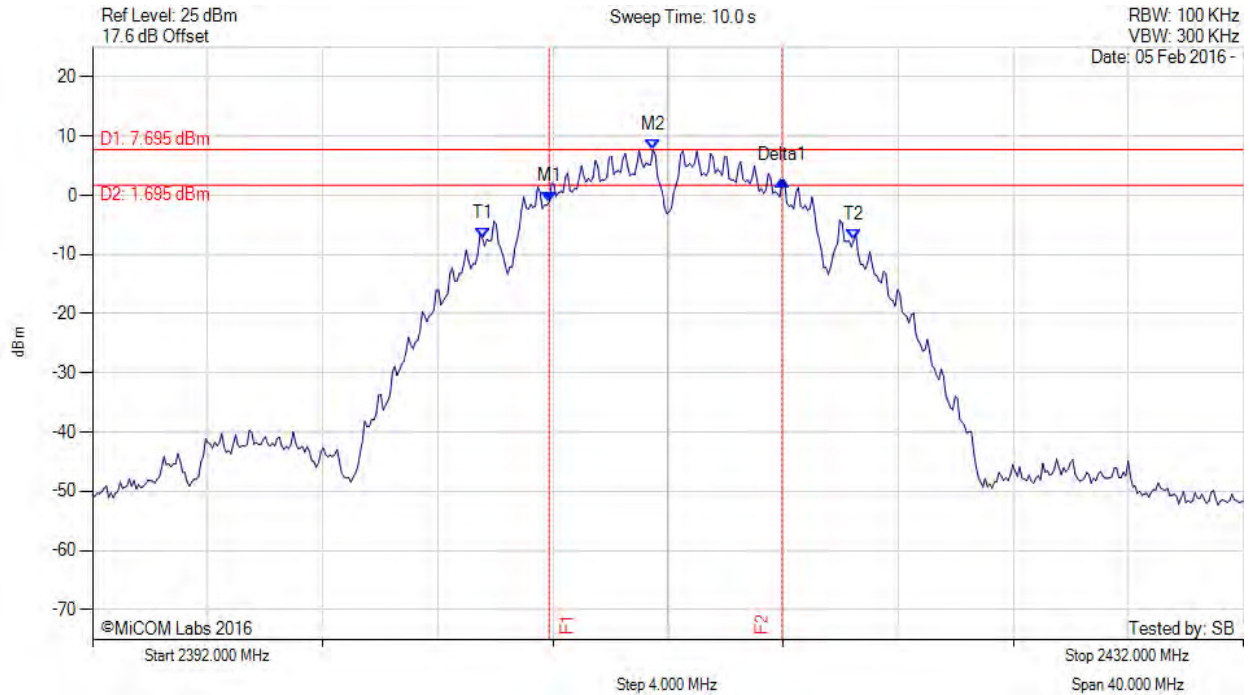

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2407.872 MHz : -1.089 dBm M2 : 2411.479 MHz : 7.695 dBm Delta1 : 8.096 MHz : 3.687 dB T1 : 2405.547 MHz : -7.217 dBm T2 : 2418.453 MHz : -7.577 dBm OBW : 12.906 MHz	Measured 6 dB Bandwidth: 8.096 MHz Limit: ≥500.0 kHz Margin: -7.60 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11b, Channel: 2412.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

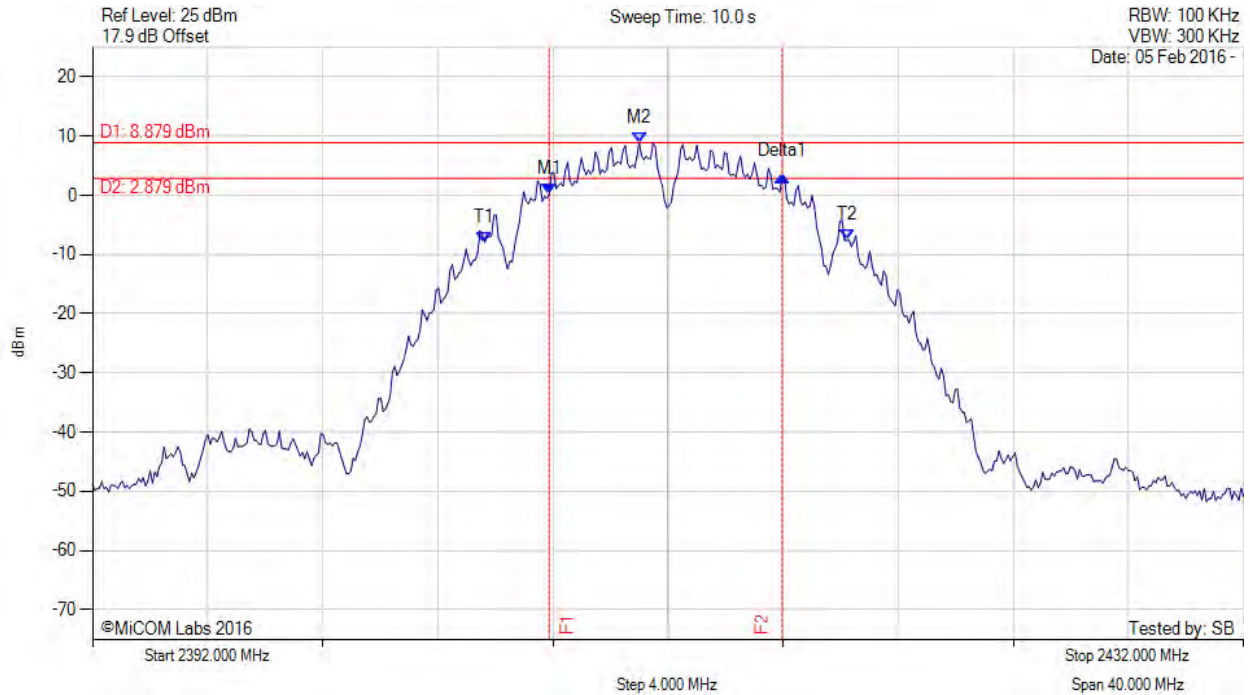

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2407.872 MHz : 0.109 dBm M2 : 2410.998 MHz : 8.879 dBm Delta1 : 8.096 MHz : 3.122 dB T1 : 2405.627 MHz : -7.880 dBm T2 : 2418.212 MHz : -7.607 dBm OBW : 12.585 MHz	Measured 6 dB Bandwidth: 8.096 MHz Limit: ≥500.0 kHz Margin: -7.60 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11b, Channel: 2412.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

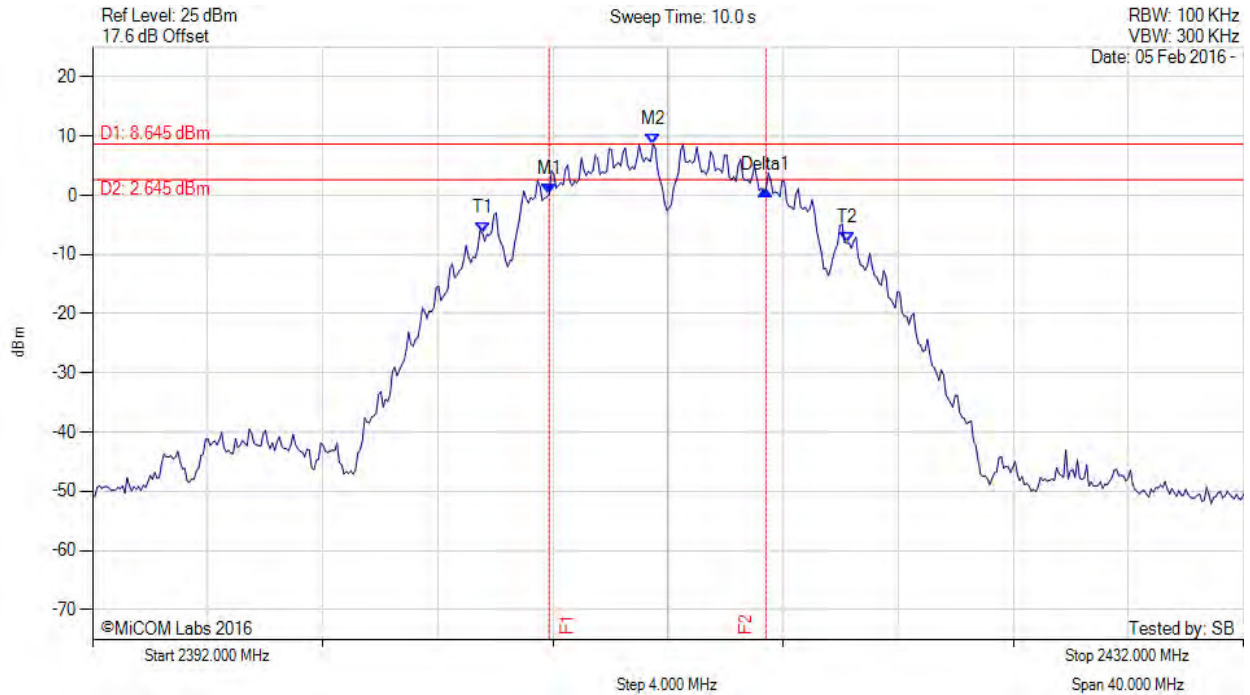

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2407.872 MHz : 0.274 dBm M2 : 2411.479 MHz : 8.645 dBm Delta1 : 7.535 MHz : 0.702 dB T1 : 2405.547 MHz : -6.275 dBm T2 : 2418.212 MHz : -8.030 dBm OBW : 12.665 MHz	Measured 6 dB Bandwidth: 7.535 MHz Limit: ≥500.0 kHz Margin: -7.04 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11b, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

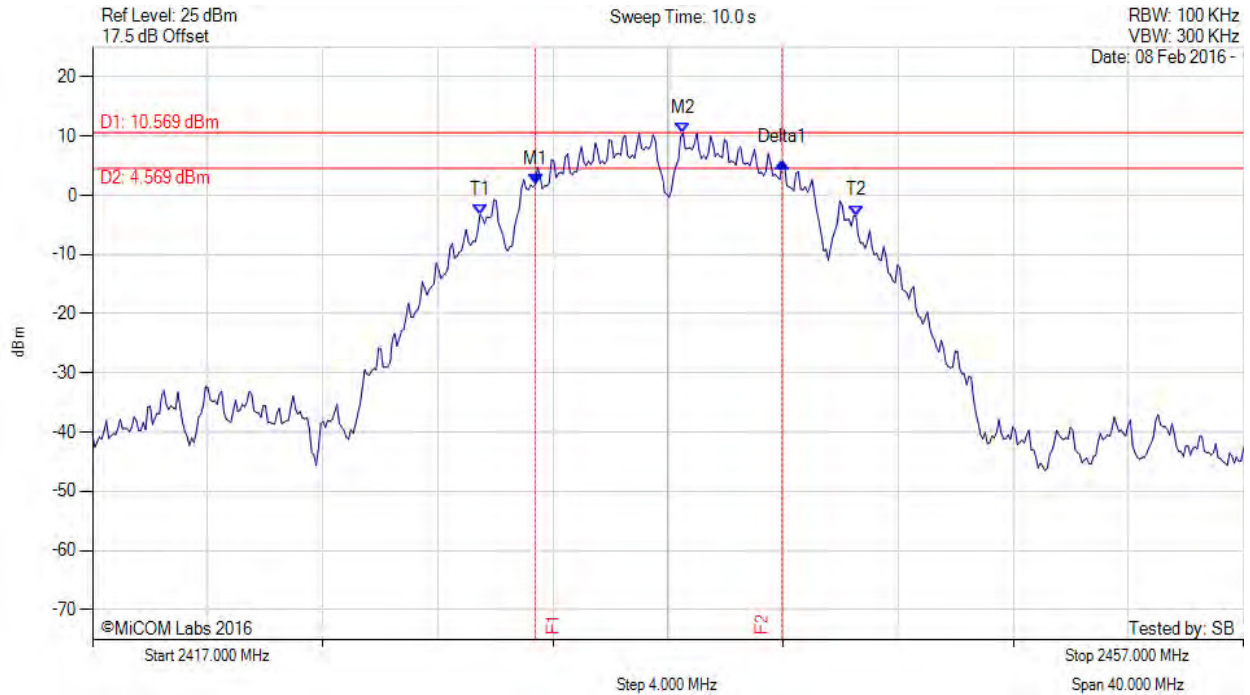

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2432.391 MHz : 1.838 dBm M2 : 2437.521 MHz : 10.569 dBm Delta1 : 8.577 MHz : 3.805 dB T1 : 2430.467 MHz : -3.210 dBm T2 : 2443.533 MHz : -3.422 dBm OBW : 13.066 MHz	Measured 6 dB Bandwidth: 8.577 MHz Limit: ≥500.0 kHz Margin: -8.08 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11b, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

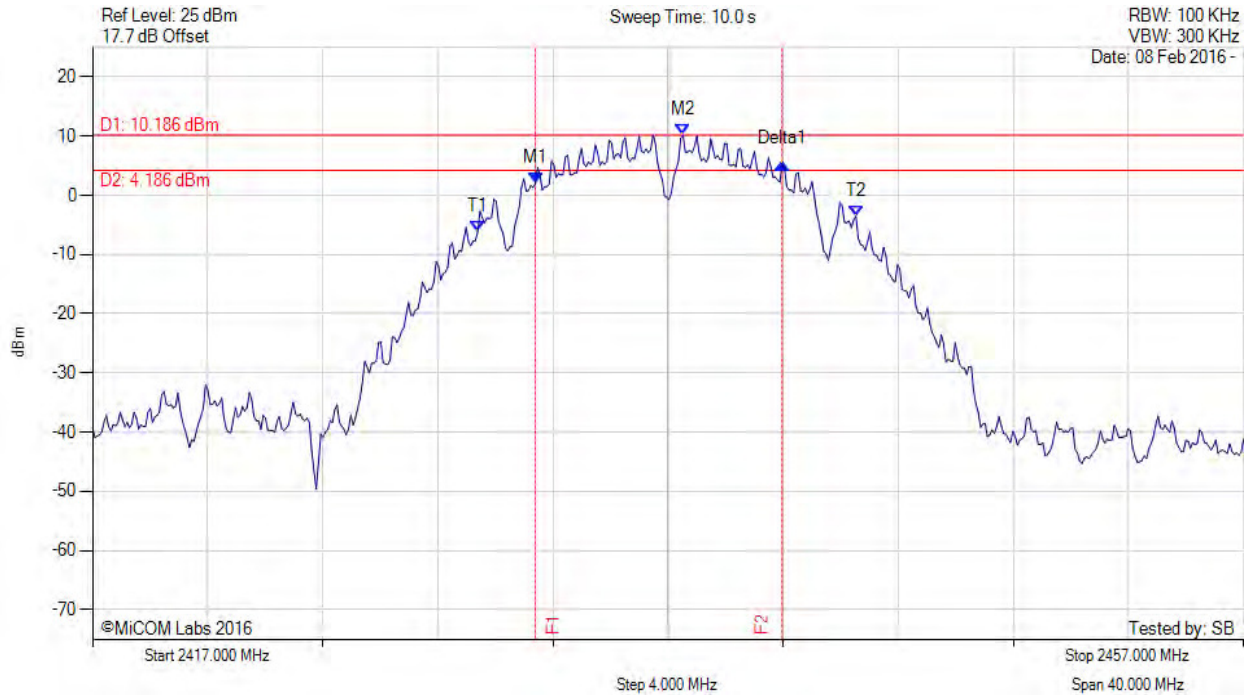

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2432.391 MHz : 1.994 dBm M2 : 2437.521 MHz : 10.186 dBm Delta1 : 8.577 MHz : 3.394 dB T1 : 2430.387 MHz : -6.116 dBm T2 : 2443.533 MHz : -3.548 dBm OBW : 13.146 MHz	Measured 6 dB Bandwidth: 8.577 MHz Limit: ≥500.0 kHz Margin: -8.08 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11b, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

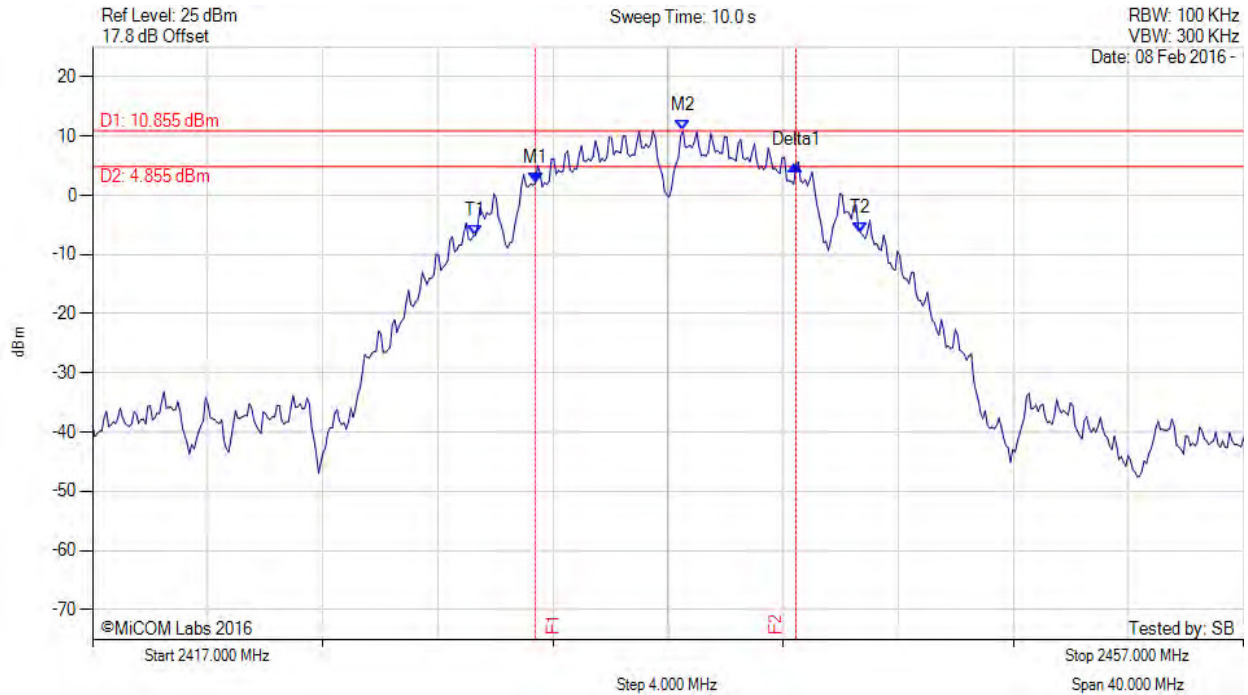

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2432.391 MHz : 2.153 dBm M2 : 2437.521 MHz : 10.855 dBm Delta1 : 9.058 MHz : 3.034 dB T1 : 2430.307 MHz : -6.763 dBm T2 : 2443.693 MHz : -6.307 dBm OBW : 13.387 MHz	Measured 6 dB Bandwidth: 9.058 MHz Limit: ≥500.0 kHz Margin: -8.56 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






6 dB & 99% BANDWIDTH



Variant: 802.11b, Channel: 2437.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

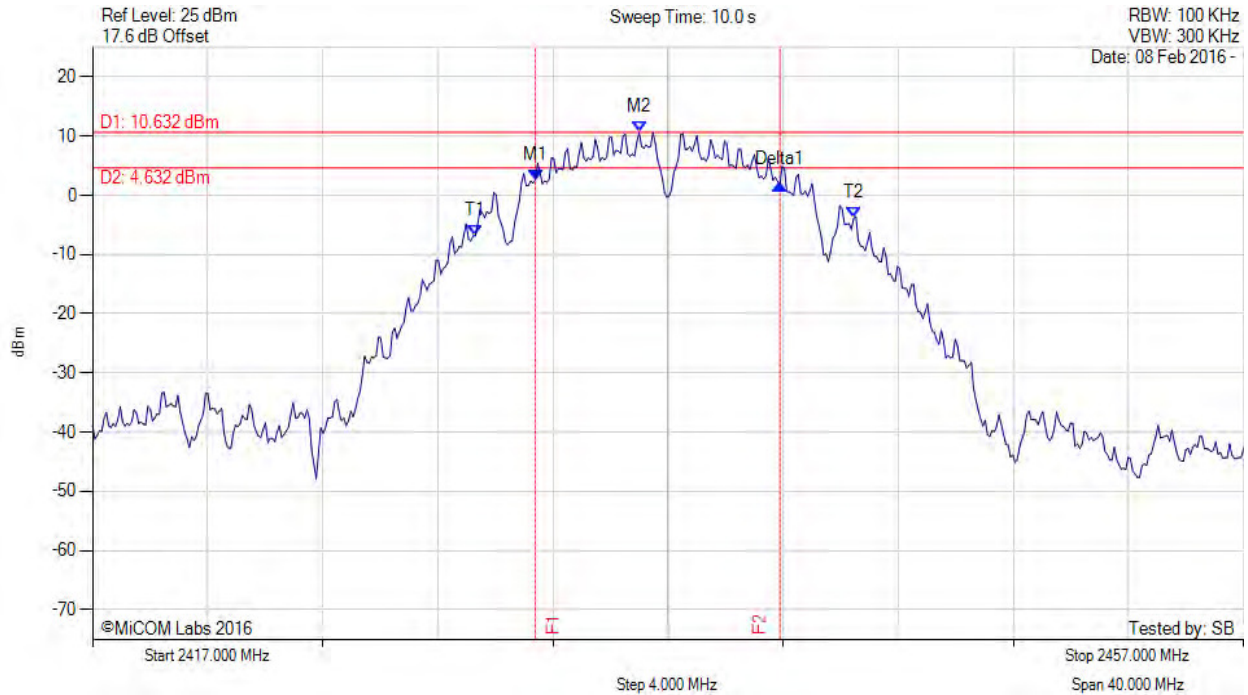

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2432.391 MHz : 2.623 dBm M2 : 2435.998 MHz : 10.632 dBm Delta1 : 8.497 MHz : -0.730 dB T1 : 2430.307 MHz : -6.848 dBm T2 : 2443.453 MHz : -3.871 dBm OBW : 13.146 MHz	Measured 6 dB Bandwidth: 8.497 MHz Limit: ≥500.0 kHz Margin: -8.00 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11b, Channel: 2462.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

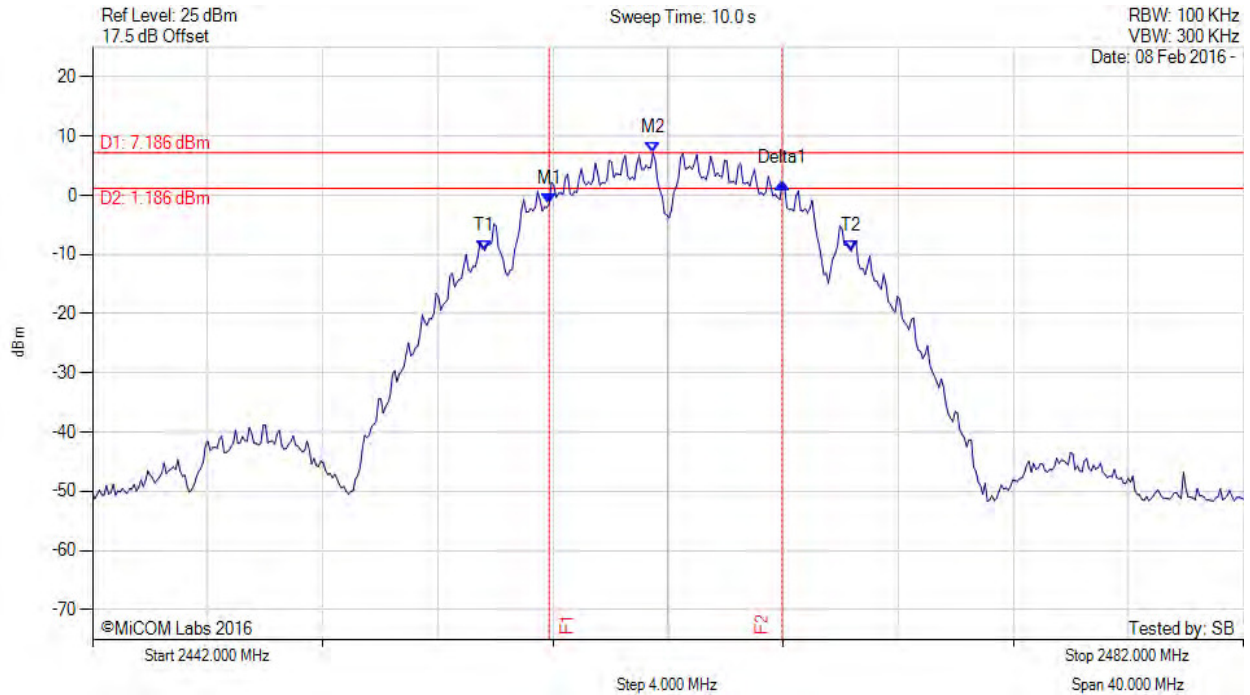

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2457.872 MHz : -1.453 dBm M2 : 2461.479 MHz : 7.186 dBm Delta1 : 8.096 MHz : 3.486 dB T1 : 2455.627 MHz : -9.321 dBm T2 : 2468.373 MHz : -9.450 dBm OBW : 12.745 MHz	Measured 6 dB Bandwidth: 8.096 MHz Limit: ≥500.0 kHz Margin: -7.60 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11b, Channel: 2462.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

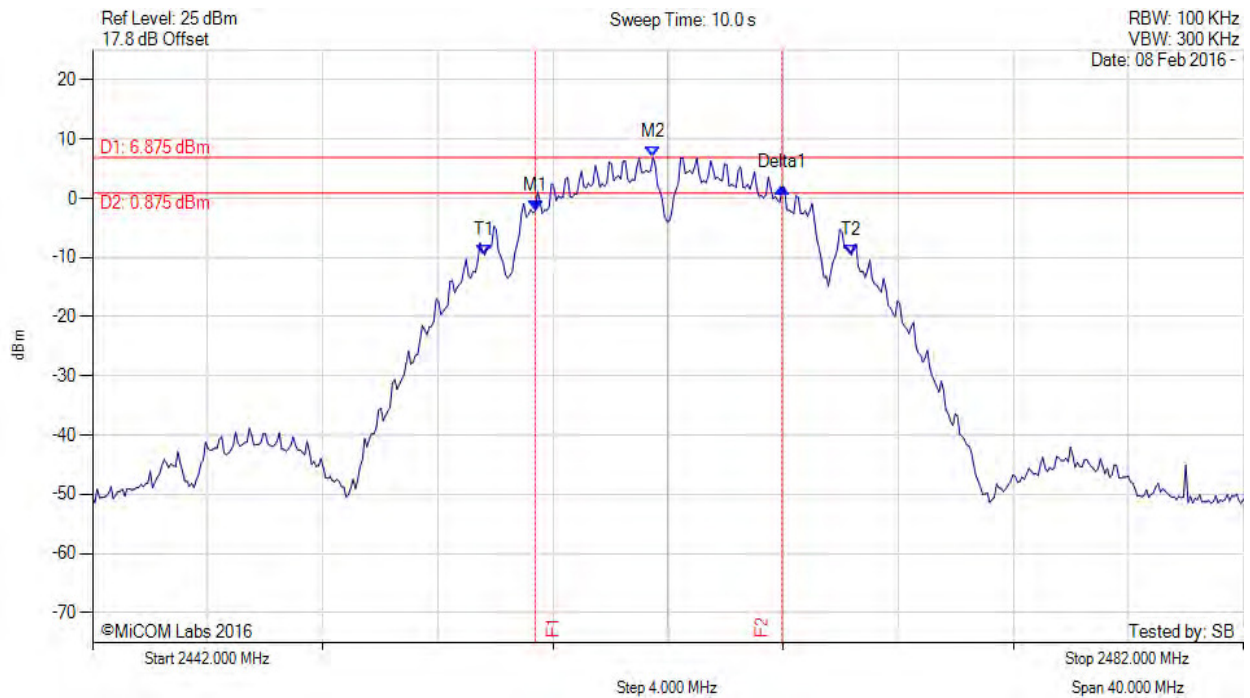

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2457.391 MHz : -2.136 dBm M2 : 2461.479 MHz : 6.875 dBm Delta1 : 8.577 MHz : 4.067 dB T1 : 2455.627 MHz : -9.539 dBm T2 : 2468.373 MHz : -9.564 dBm OBW : 12.745 MHz	Measured 6 dB Bandwidth: 8.577 MHz Limit: ≥500.0 kHz Margin: -8.08 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11b, Channel: 2462.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

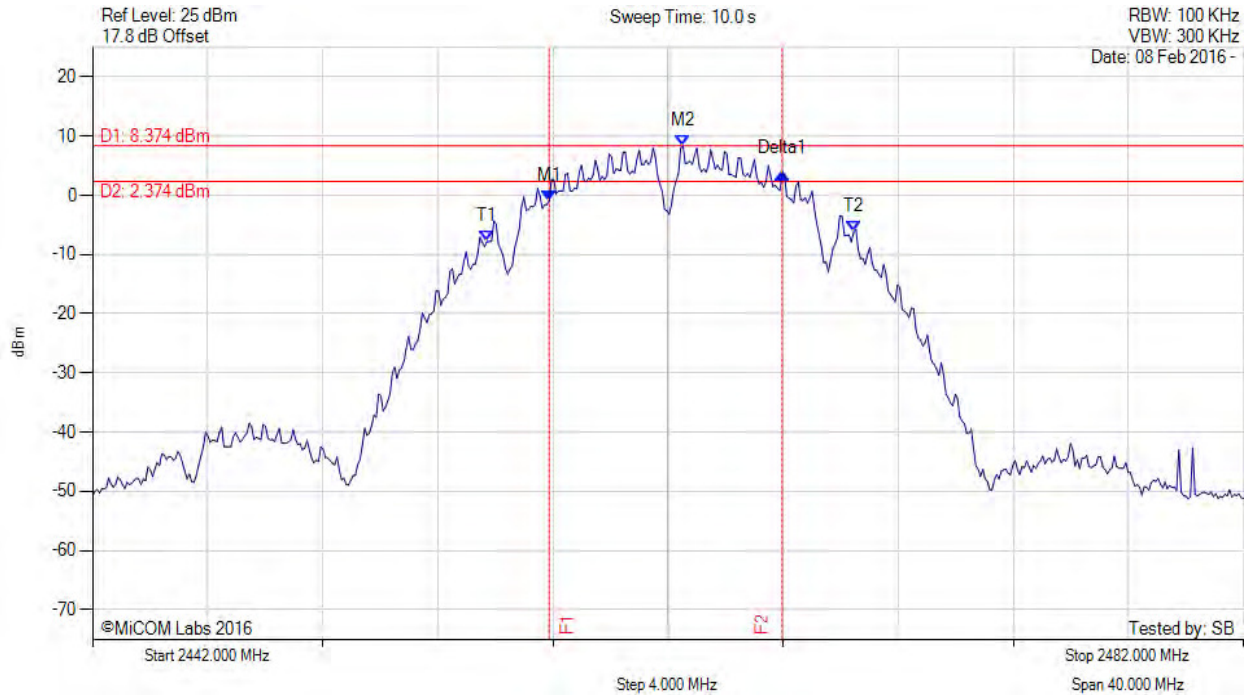

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2457.872 MHz : -0.953 dBm M2 : 2462.521 MHz : 8.374 dBm Delta1 : 8.096 MHz : 4.680 dB T1 : 2455.707 MHz : -7.831 dBm T2 : 2468.453 MHz : -6.149 dBm OBW : 12.745 MHz	Measured 6 dB Bandwidth: 8.096 MHz Limit: ≥500.0 kHz Margin: -7.60 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11b, Channel: 2462.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

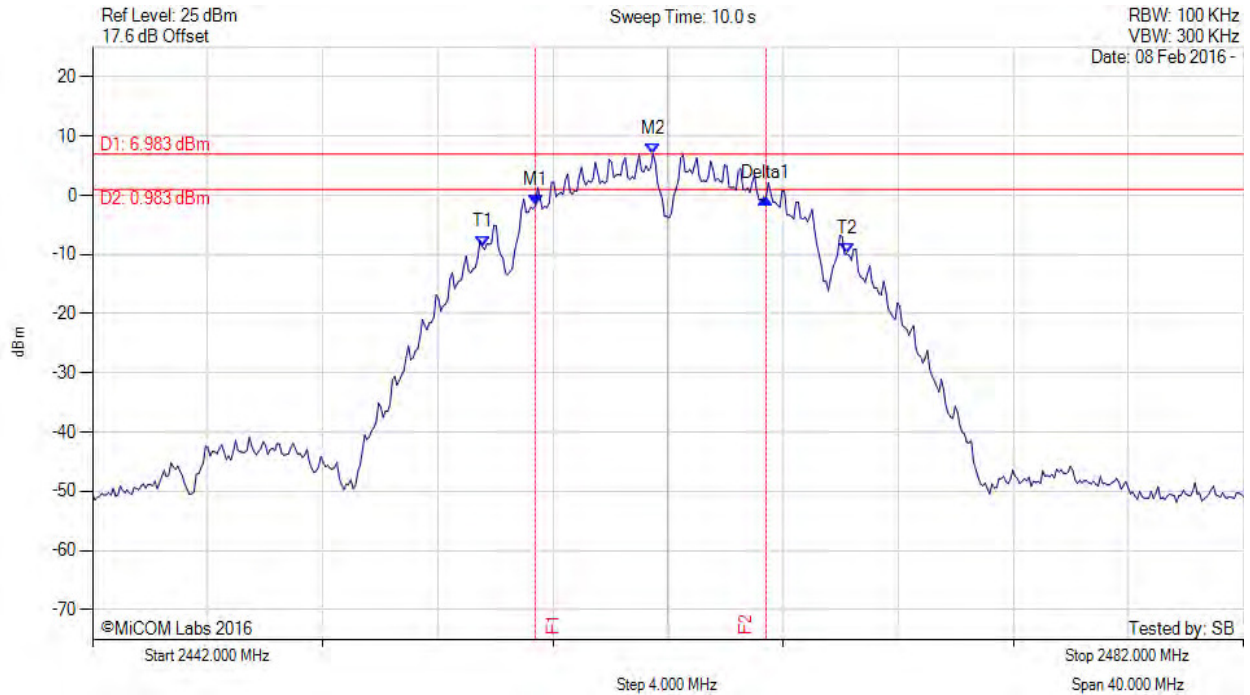

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2457.391 MHz : -1.760 dBm M2 : 2461.479 MHz : 6.983 dBm Delta1 : 8.016 MHz : 1.186 dB T1 : 2455.547 MHz : -8.648 dBm T2 : 2468.212 MHz : -9.887 dBm OBW : 12.665 MHz	Measured 6 dB Bandwidth: 8.016 MHz Limit: ≥500.0 kHz Margin: -7.52 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11g, Channel: 2412.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

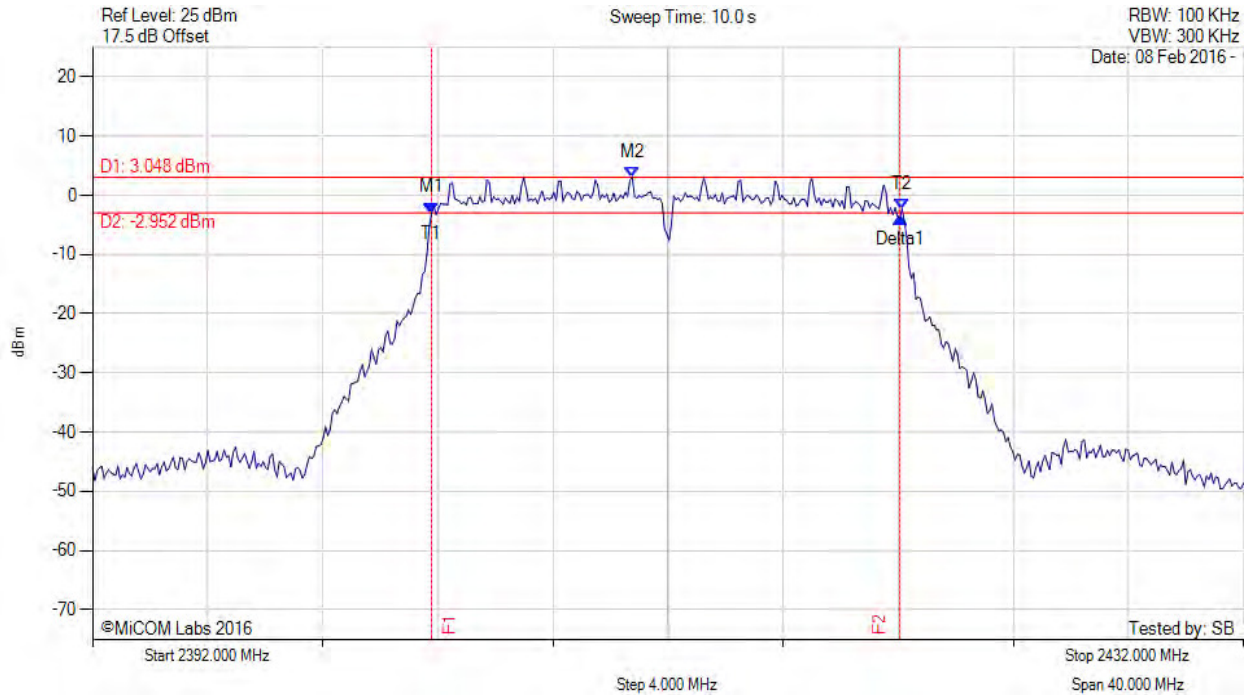

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2403.784 MHz : -2.962 dBm M2 : 2410.758 MHz : 3.048 dBm Delta1 : 16.273 MHz : -0.915 dB T1 : 2403.784 MHz : -2.962 dBm T2 : 2420.136 MHz : -2.283 dBm OBW : 16.353 MHz	Measured 6 dB Bandwidth: 16.273 MHz Limit: ≥500.0 kHz Margin: -15.77 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11g, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

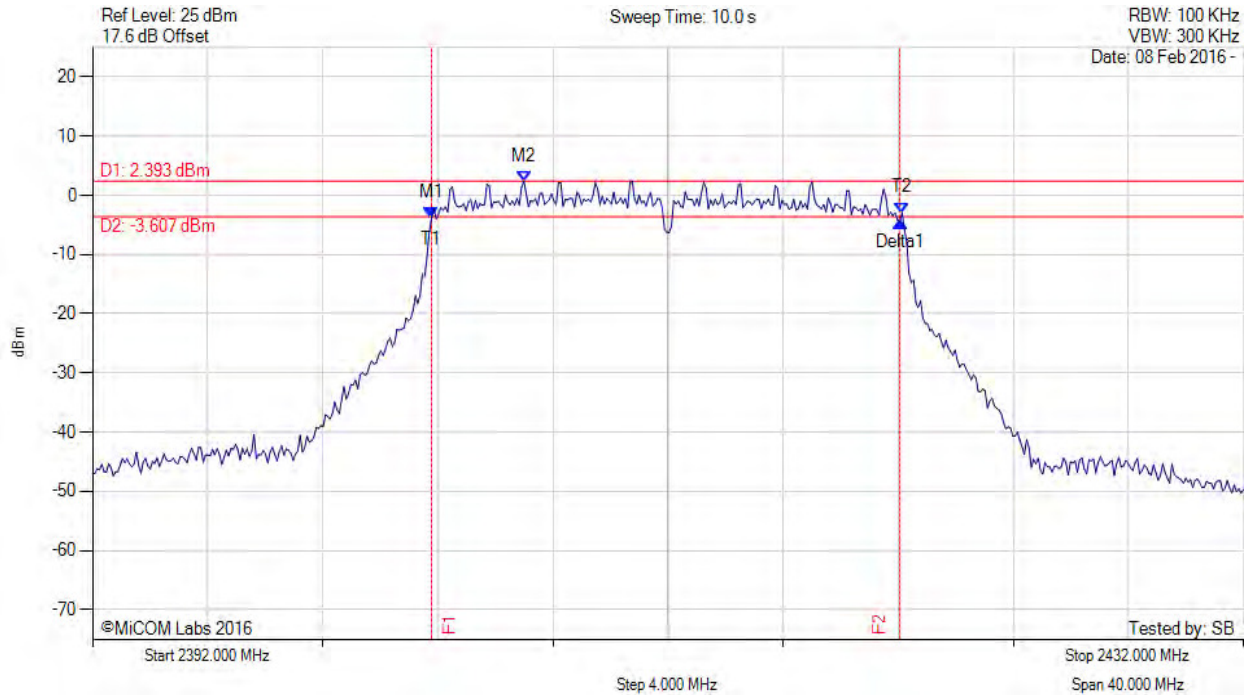

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2403.784 MHz : -3.820 dBm M2 : 2406.990 MHz : 2.393 dBm Delta1 : 16.273 MHz : -0.576 dB T1 : 2403.784 MHz : -3.820 dBm T2 : 2420.136 MHz : -2.948 dBm OBW : 16.353 MHz	Measured 6 dB Bandwidth: 16.273 MHz Limit: ≥500.0 kHz Margin: -15.77 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11g, Channel: 2412.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

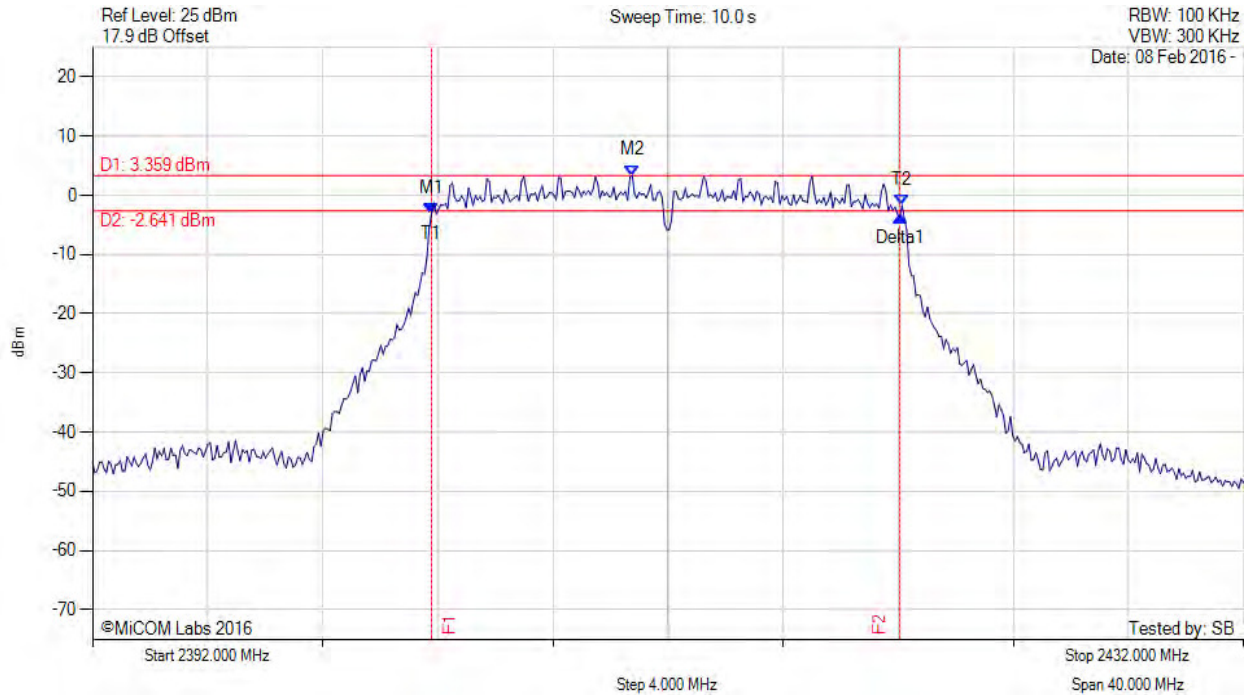

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2403.784 MHz : -3.013 dBm M2 : 2410.758 MHz : 3.359 dBm Delta1 : 16.273 MHz : -0.604 dB T1 : 2403.784 MHz : -3.013 dBm T2 : 2420.136 MHz : -1.709 dBm OBW : 16.353 MHz	Measured 6 dB Bandwidth: 16.273 MHz Limit: ≥500.0 kHz Margin: -15.77 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






6 dB & 99% BANDWIDTH



Variant: 802.11g, Channel: 2412.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

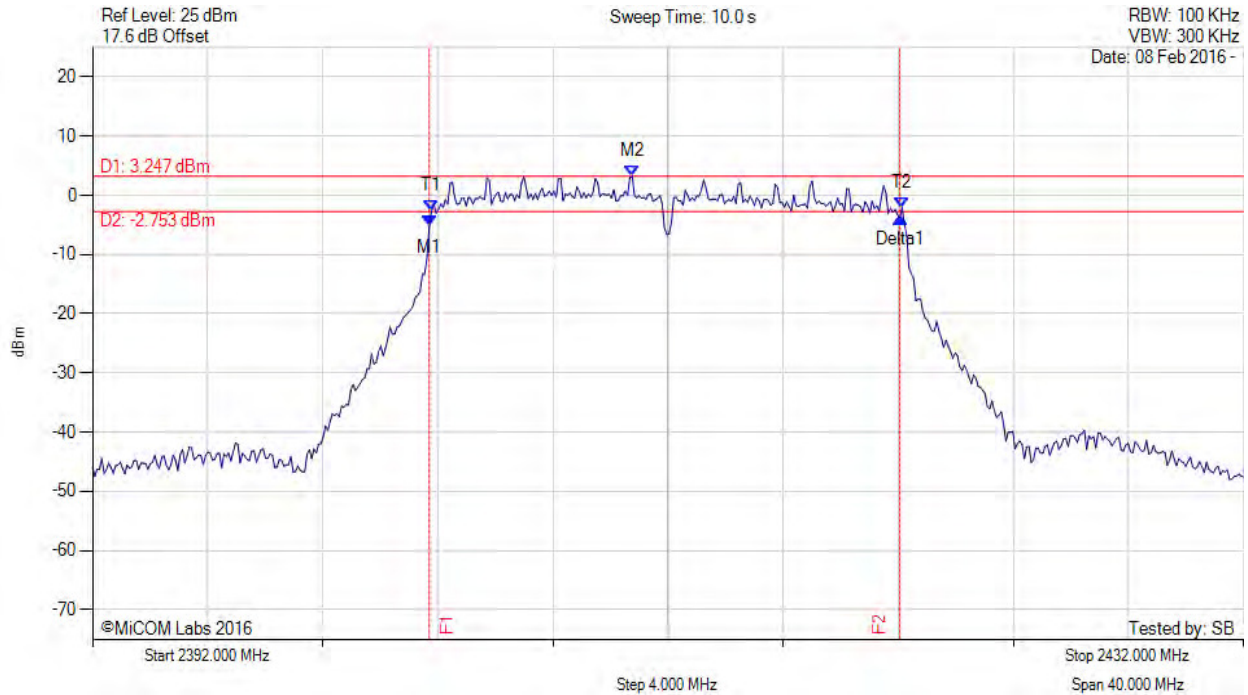

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2403.703 MHz : -5.272 dBm M2 : 2410.758 MHz : 3.247 dBm Delta1 : 16.353 MHz : 1.521 dB T1 : 2403.784 MHz : -2.659 dBm T2 : 2420.136 MHz : -2.069 dBm OBW : 16.353 MHz	Measured 6 dB Bandwidth: 16.353 MHz Limit: ≥500.0 kHz Margin: -15.85 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11g, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

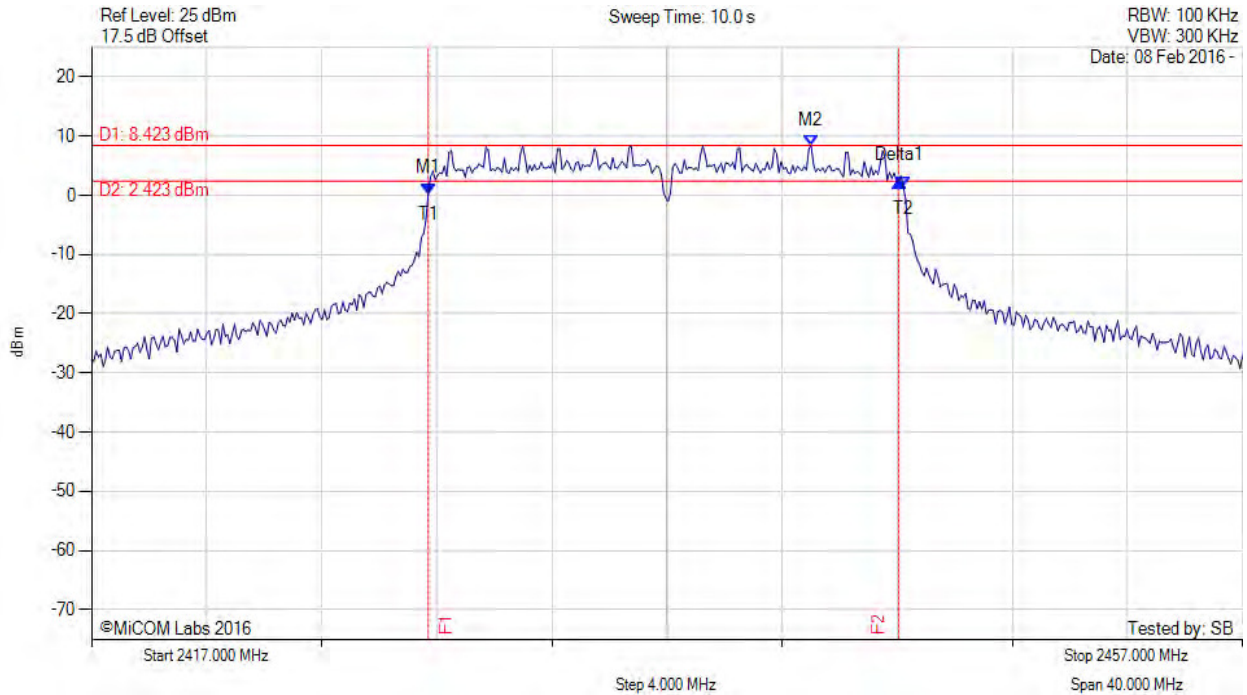

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2428.703 MHz : 0.318 dBm M2 : 2442.010 MHz : 8.423 dBm Delta1 : 16.353 MHz : 2.097 dB T1 : 2428.703 MHz : 0.318 dBm T2 : 2445.216 MHz : 1.323 dBm OBW : 16.513 MHz	Measured 6 dB Bandwidth: 16.353 MHz Limit: ≥500.0 kHz Margin: -15.85 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11g, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

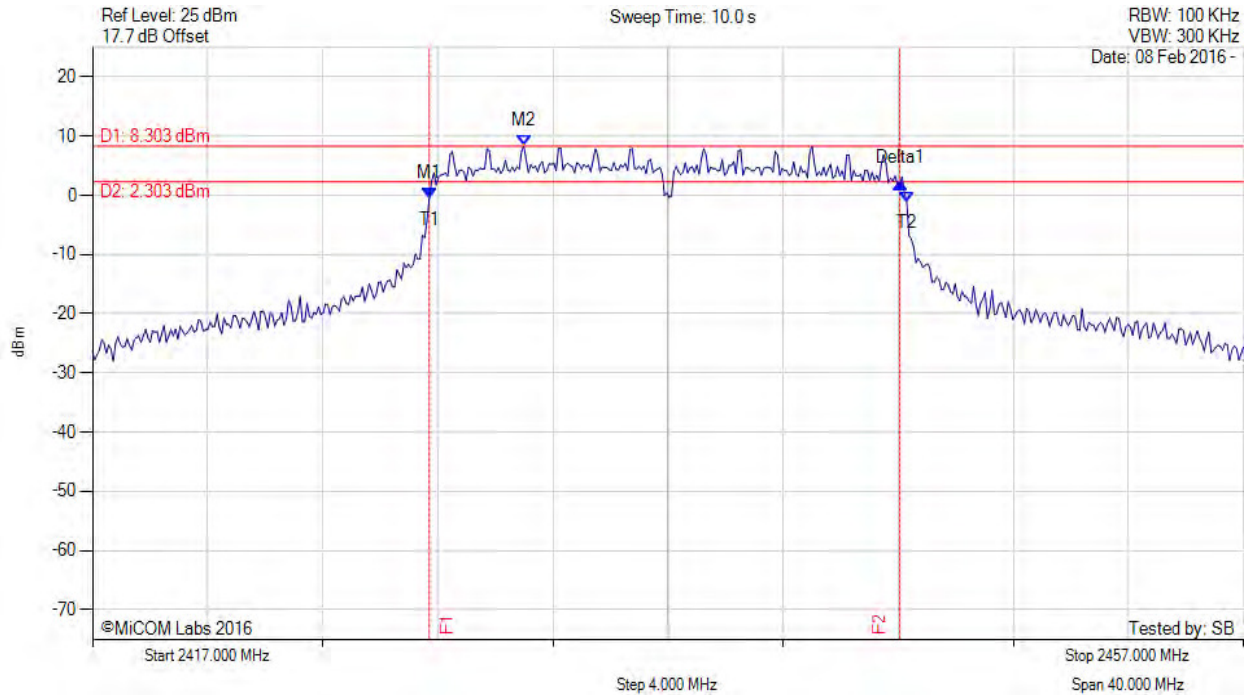

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2428.703 MHz : -0.485 dBm M2 : 2431.990 MHz : 8.303 dBm Delta1 : 16.353 MHz : 2.611 dB T1 : 2428.703 MHz : -0.485 dBm T2 : 2445.297 MHz : -1.123 dBm OBW : 16.593 MHz	Measured 6 dB Bandwidth: 16.353 MHz Limit: ≥500.0 kHz Margin: -15.85 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11g, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

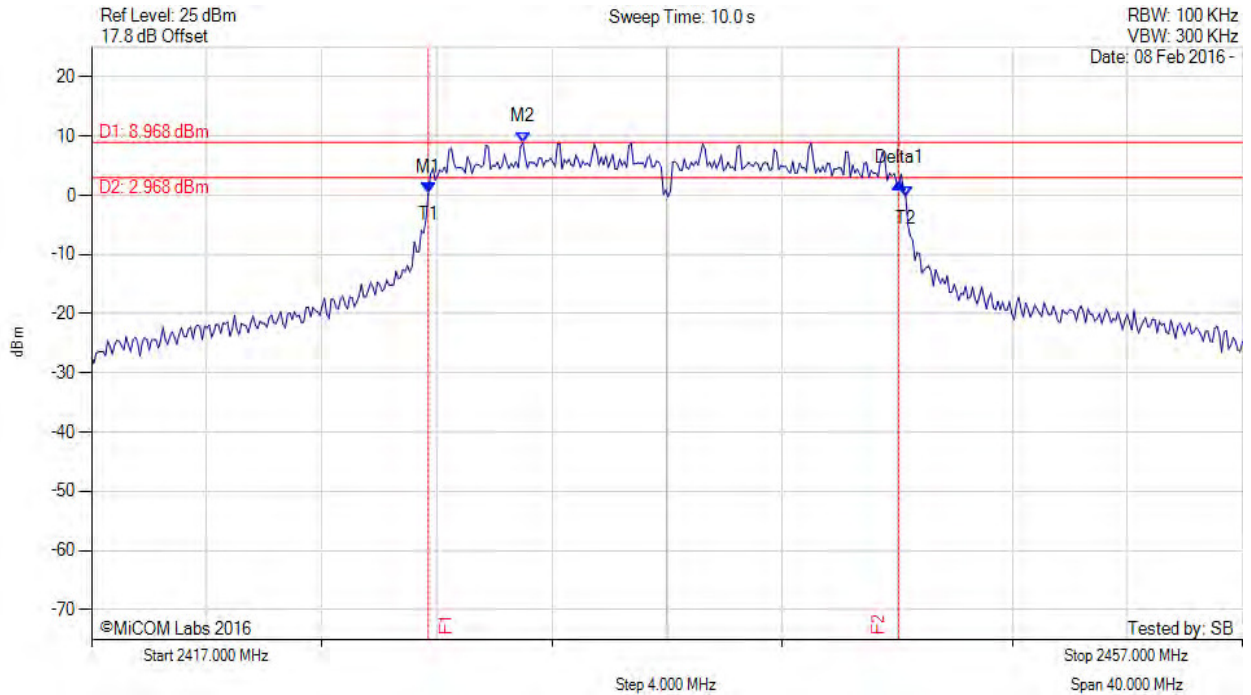

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2428.703 MHz : 0.339 dBm M2 : 2431.990 MHz : 8.968 dBm Delta1 : 16.353 MHz : 1.777 dB T1 : 2428.703 MHz : 0.339 dBm T2 : 2445.297 MHz : -0.275 dBm OBW : 16.593 MHz	Measured 6 dB Bandwidth: 16.353 MHz Limit: ≥500.0 kHz Margin: -15.85 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11g, Channel: 2437.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

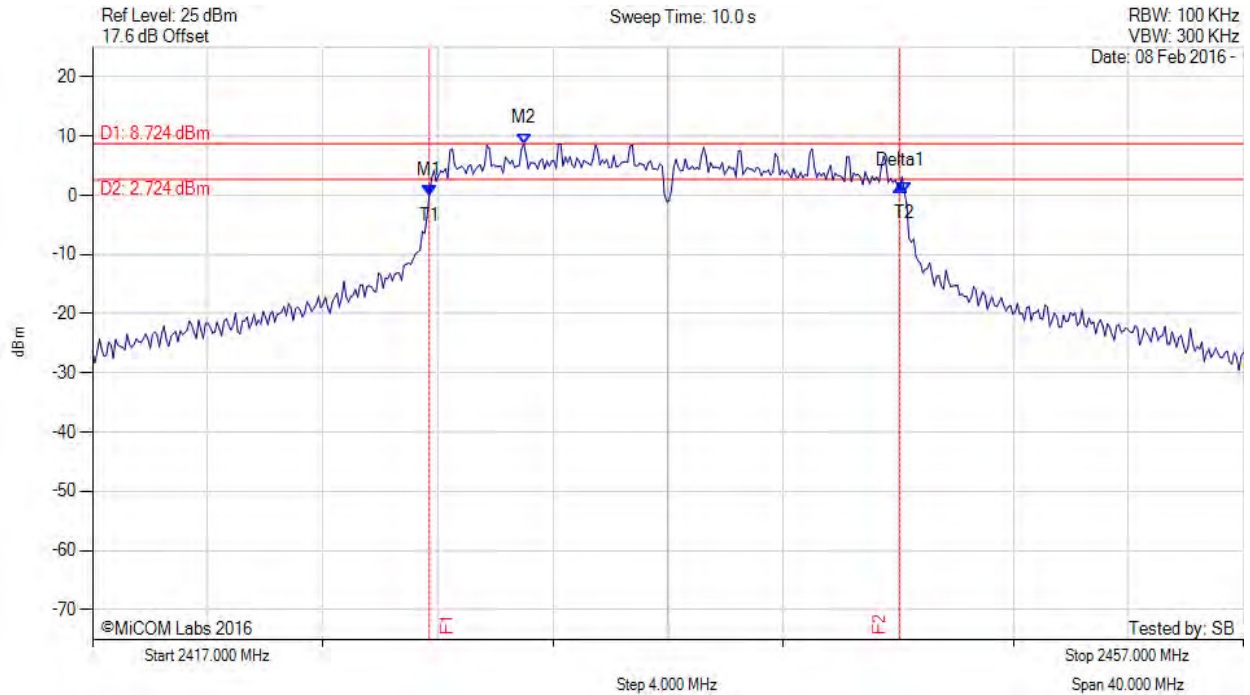

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2428.703 MHz : 0.005 dBm M2 : 2431.990 MHz : 8.724 dBm Delta1 : 16.353 MHz : 1.523 dB T1 : 2428.703 MHz : 0.005 dBm T2 : 2445.216 MHz : 0.542 dBm OBW : 16.513 MHz	Measured 6 dB Bandwidth: 16.353 MHz Limit: ≥500.0 kHz Margin: -15.85 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11g, Channel: 2462.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

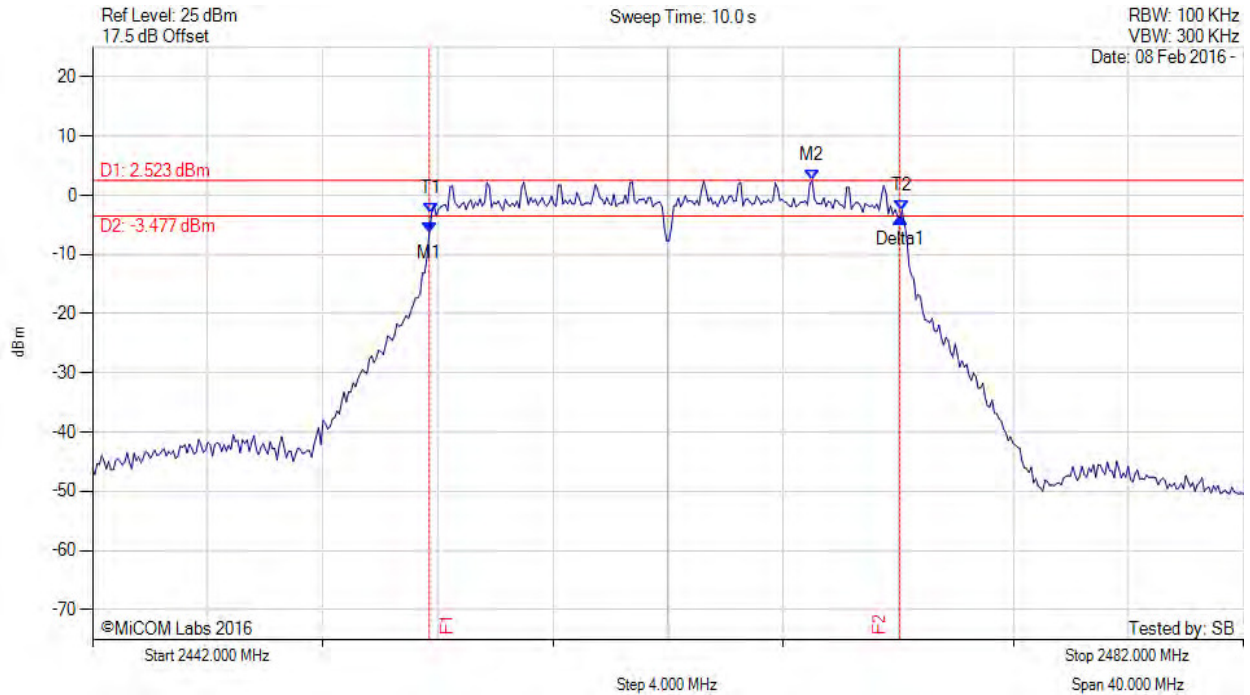

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2453.703 MHz : -6.216 dBm M2 : 2467.010 MHz : 2.523 dBm Delta1 : 16.353 MHz : 2.461 dB T1 : 2453.784 MHz : -3.080 dBm T2 : 2470.136 MHz : -2.545 dBm OBW : 16.353 MHz	Measured 6 dB Bandwidth: 16.353 MHz Limit: ≥500.0 kHz Margin: -15.85 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11g, Channel: 2462.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

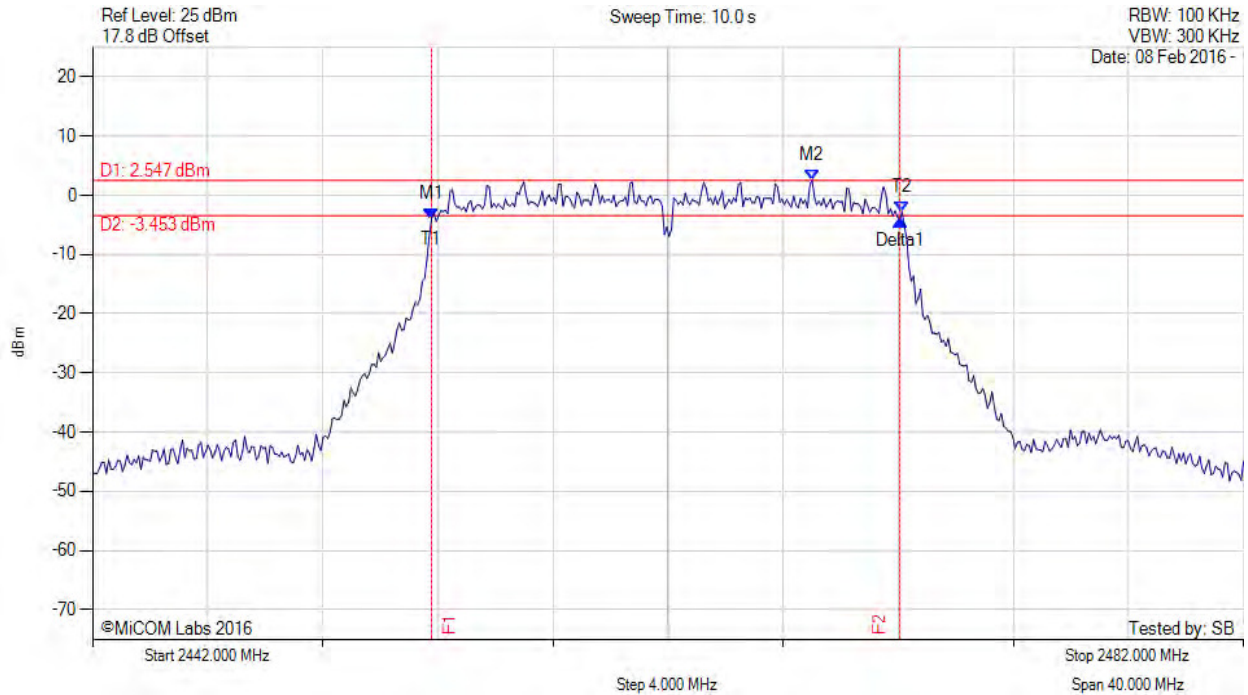

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2453.784 MHz : -3.930 dBm M2 : 2467.010 MHz : 2.547 dBm Delta1 : 16.273 MHz : -0.187 dB T1 : 2453.784 MHz : -3.930 dBm T2 : 2470.136 MHz : -2.773 dBm OBW : 16.353 MHz	Measured 6 dB Bandwidth: 16.273 MHz Limit: ≥500.0 kHz Margin: -15.77 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11g, Channel: 2462.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

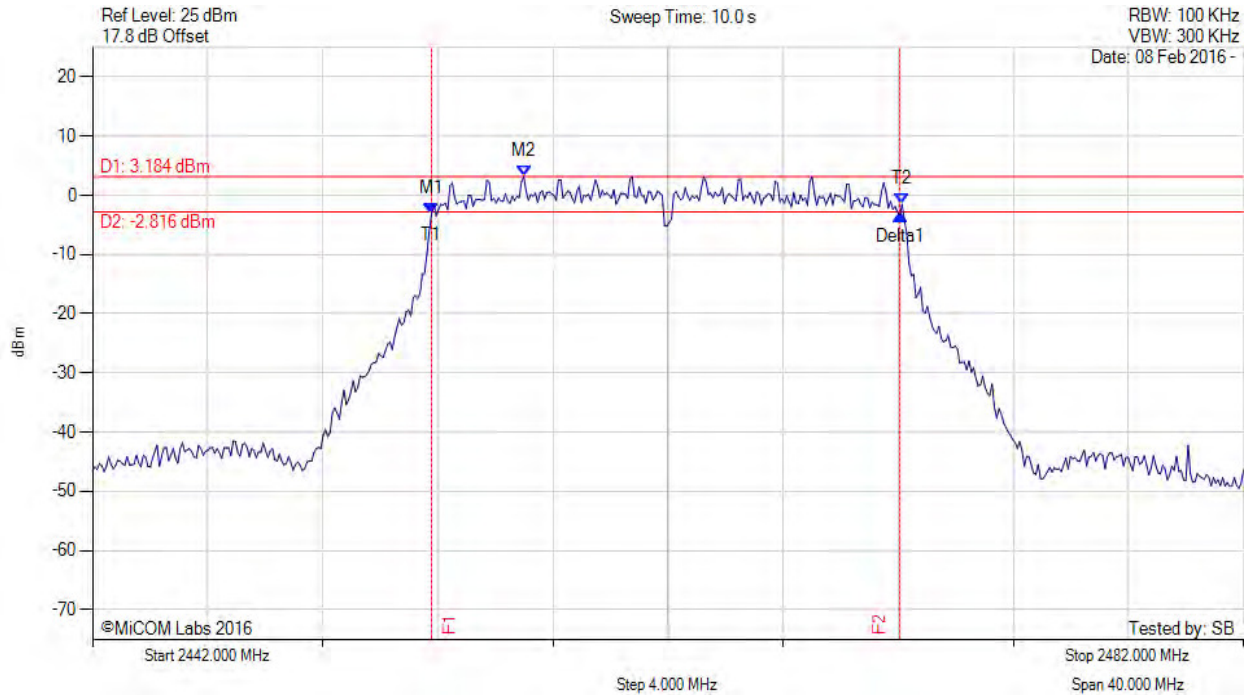

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2453.784 MHz : -3.121 dBm M2 : 2456.990 MHz : 3.184 dBm Delta1 : 16.273 MHz : -0.167 dB T1 : 2453.784 MHz : -3.121 dBm T2 : 2470.136 MHz : -1.538 dBm OBW : 16.353 MHz	Measured 6 dB Bandwidth: 16.273 MHz Limit: ≥500.0 kHz Margin: -15.77 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






6 dB & 99% BANDWIDTH



Variant: 802.11g, Channel: 2462.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

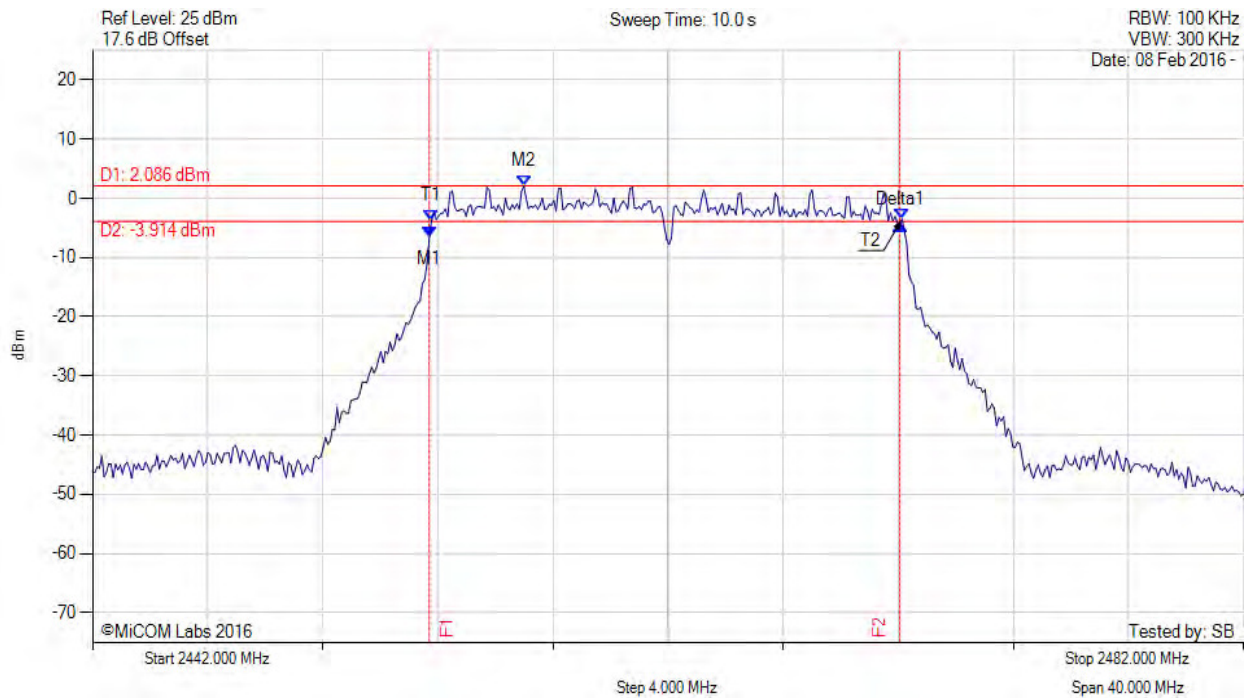

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2453.703 MHz : -6.604 dBm M2 : 2456.990 MHz : 2.086 dBm Delta1 : 16.353 MHz : 2.109 dB T1 : 2453.784 MHz : -3.773 dBm T2 : 2470.136 MHz : -3.552 dBm OBW : 16.353 MHz	Measured 6 dB Bandwidth: 16.353 MHz Limit: ≥500.0 kHz Margin: -15.85 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

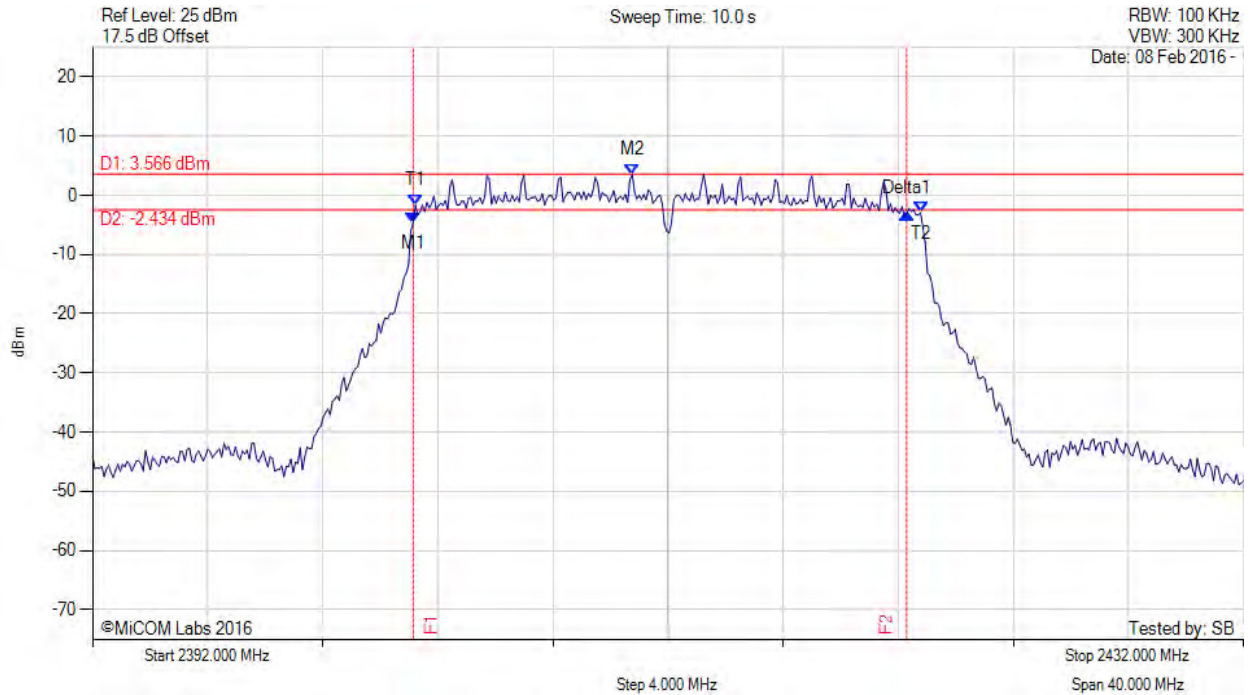

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2403.142 MHz : -4.638 dBm M2 : 2410.758 MHz : 3.566 dBm Delta1 : 17.154 MHz : 1.599 dB T1 : 2403.222 MHz : -1.660 dBm T2 : 2420.778 MHz : -2.931 dBm OBW : 17.555 MHz	Measured 6 dB Bandwidth: 17.154 MHz Limit: ≥500.0 kHz Margin: -16.65 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

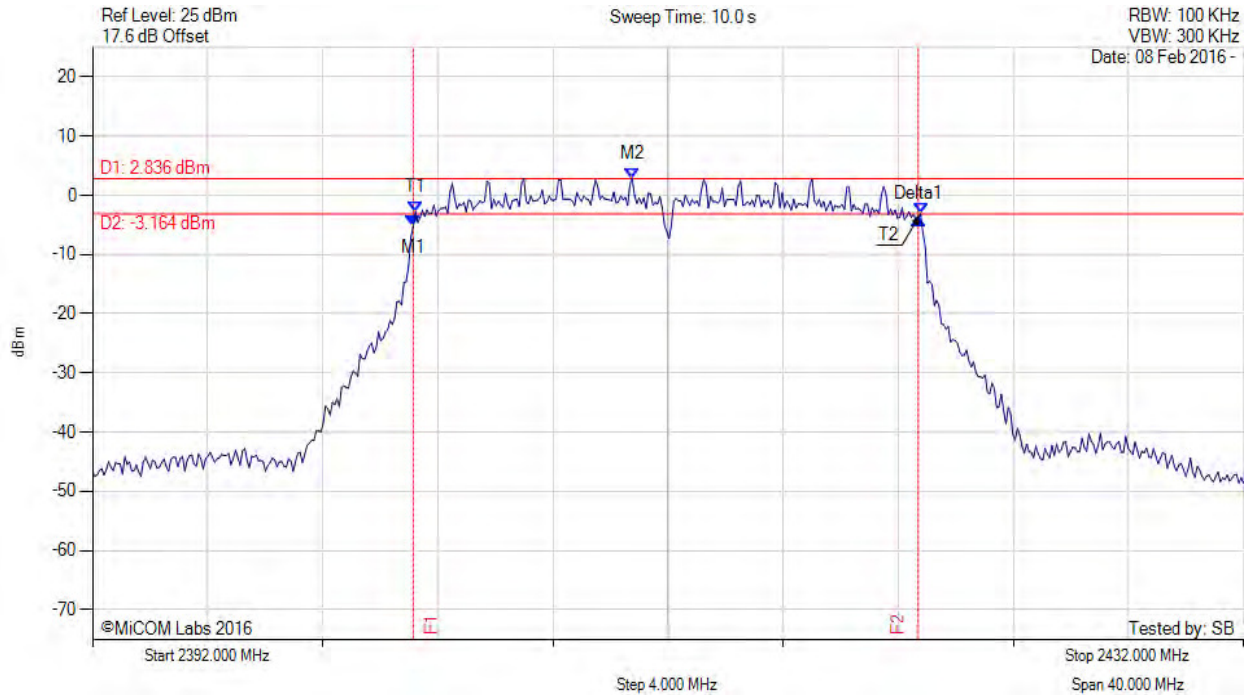

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2403.142 MHz : -5.191 dBm M2 : 2410.758 MHz : 2.836 dBm Delta1 : 17.555 MHz : 1.178 dB T1 : 2403.222 MHz : -2.742 dBm T2 : 2420.778 MHz : -3.133 dBm OBW : 17.555 MHz	Measured 6 dB Bandwidth: 17.555 MHz Limit: ≥500.0 kHz Margin: -17.06 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

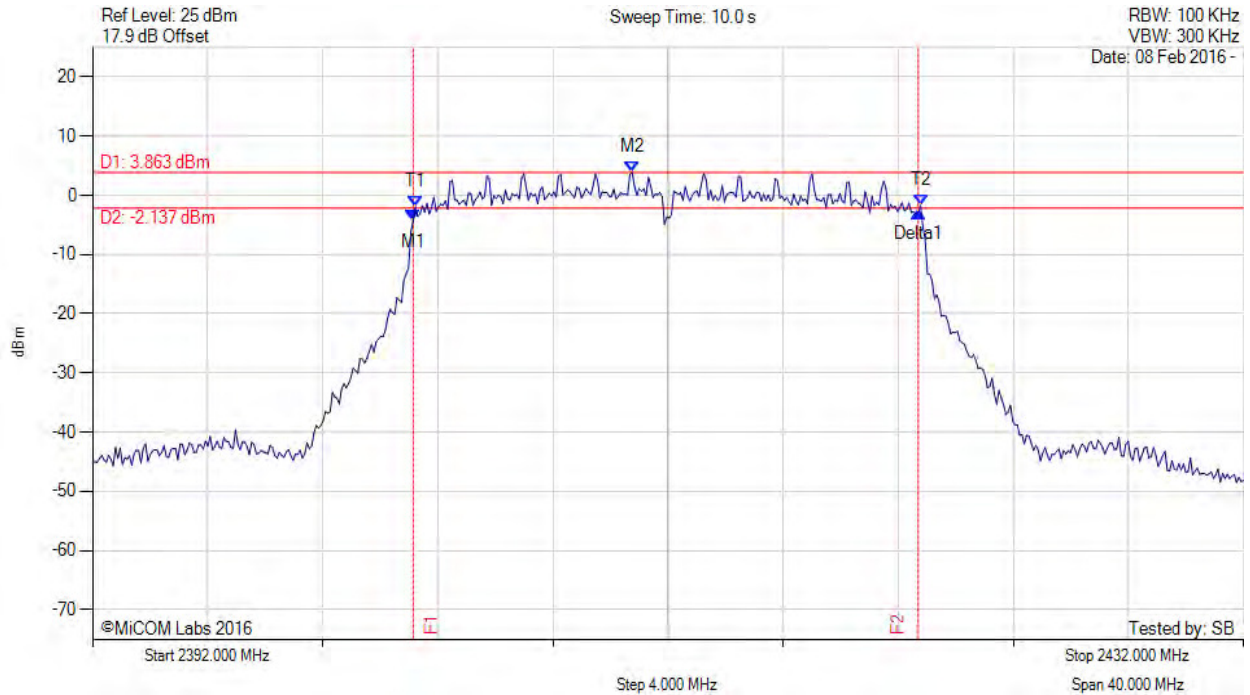

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2403.142 MHz : -4.288 dBm M2 : 2410.758 MHz : 3.863 dBm Delta1 : 17.555 MHz : 1.428 dB T1 : 2403.222 MHz : -1.939 dBm T2 : 2420.778 MHz : -1.721 dBm OBW : 17.555 MHz	Measured 6 dB Bandwidth: 17.555 MHz Limit: ≥500.0 kHz Margin: -17.06 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 61 of 223

6 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

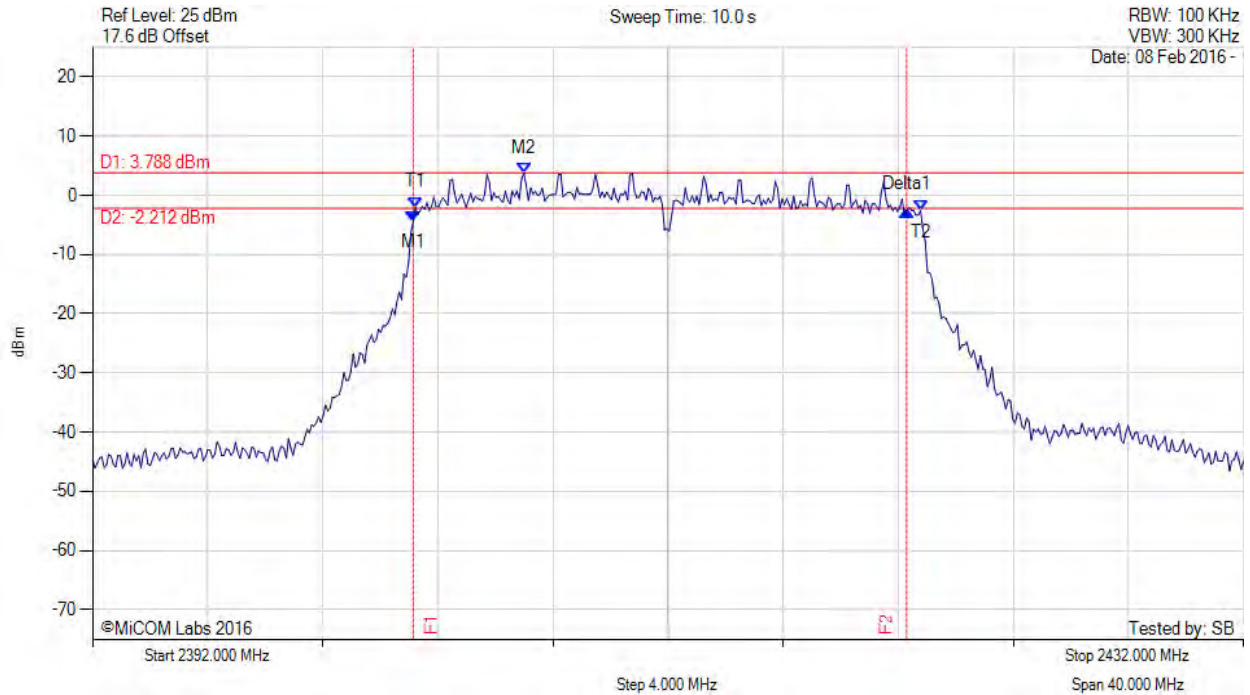

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2403.142 MHz : -4.404 dBm M2 : 2406.990 MHz : 3.788 dBm Delta1 : 17.154 MHz : 1.924 dB T1 : 2403.222 MHz : -2.020 dBm T2 : 2420.778 MHz : -2.616 dBm OBW : 17.555 MHz	Measured 6 dB Bandwidth: 17.154 MHz Limit: ≥500.0 kHz Margin: -16.65 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

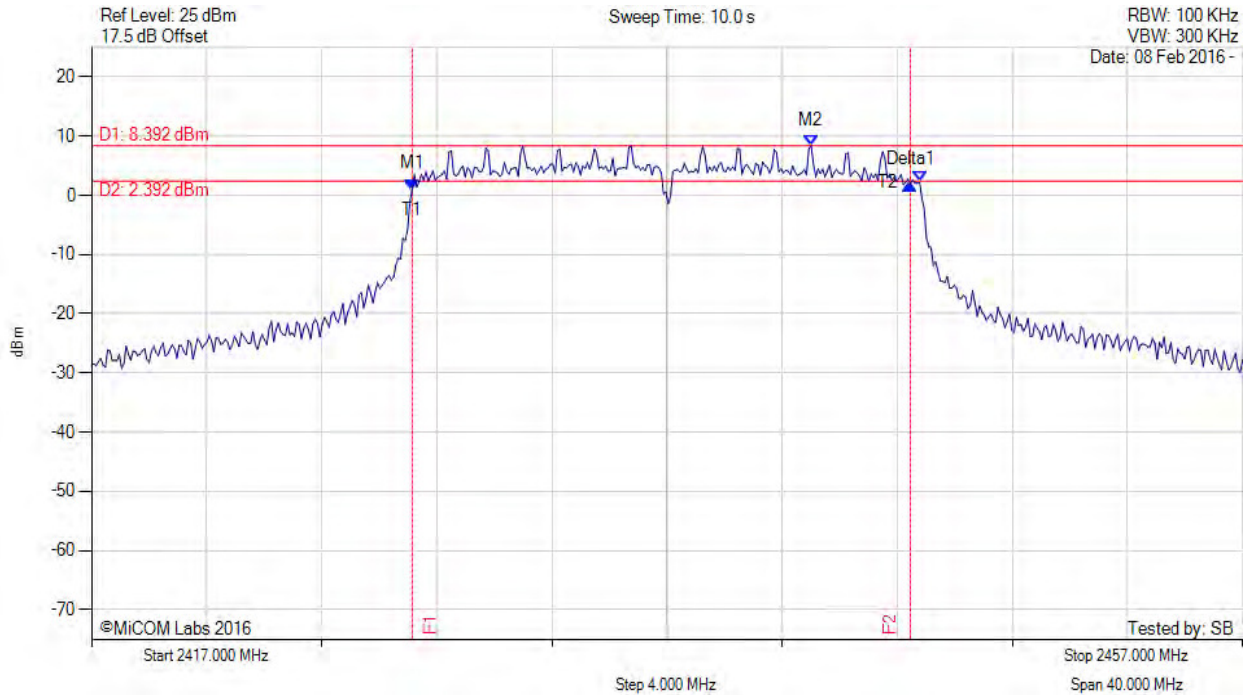

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2428.142 MHz : 1.004 dBm M2 : 2442.010 MHz : 8.392 dBm Delta1 : 17.315 MHz : 0.925 dB T1 : 2428.142 MHz : 1.004 dBm T2 : 2445.778 MHz : 2.200 dBm OBW : 17.635 MHz	Measured 6 dB Bandwidth: 17.315 MHz Limit: ≥500.0 kHz Margin: -16.82 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

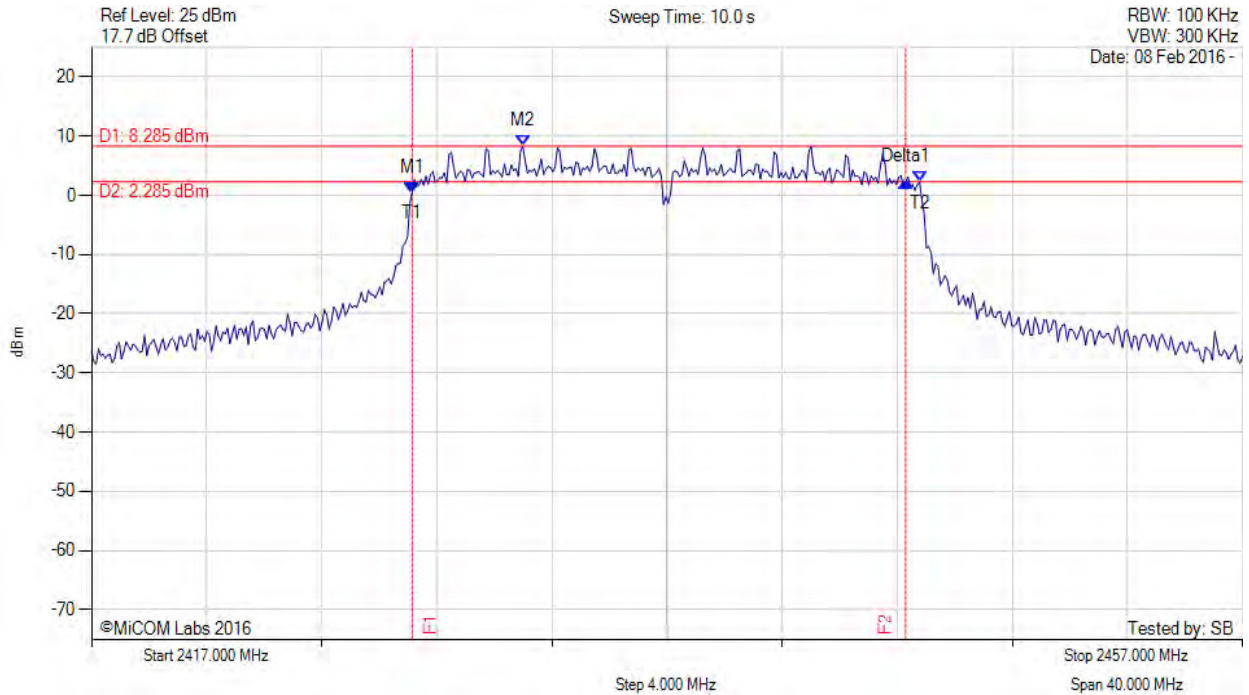

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2428.142 MHz : 0.522 dBm M2 : 2431.990 MHz : 8.285 dBm Delta1 : 17.154 MHz : 1.690 dB T1 : 2428.142 MHz : 0.522 dBm T2 : 2445.778 MHz : 2.208 dBm OBW : 17.635 MHz	Measured 6 dB Bandwidth: 17.154 MHz Limit: ≥500.0 kHz Margin: -16.65 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

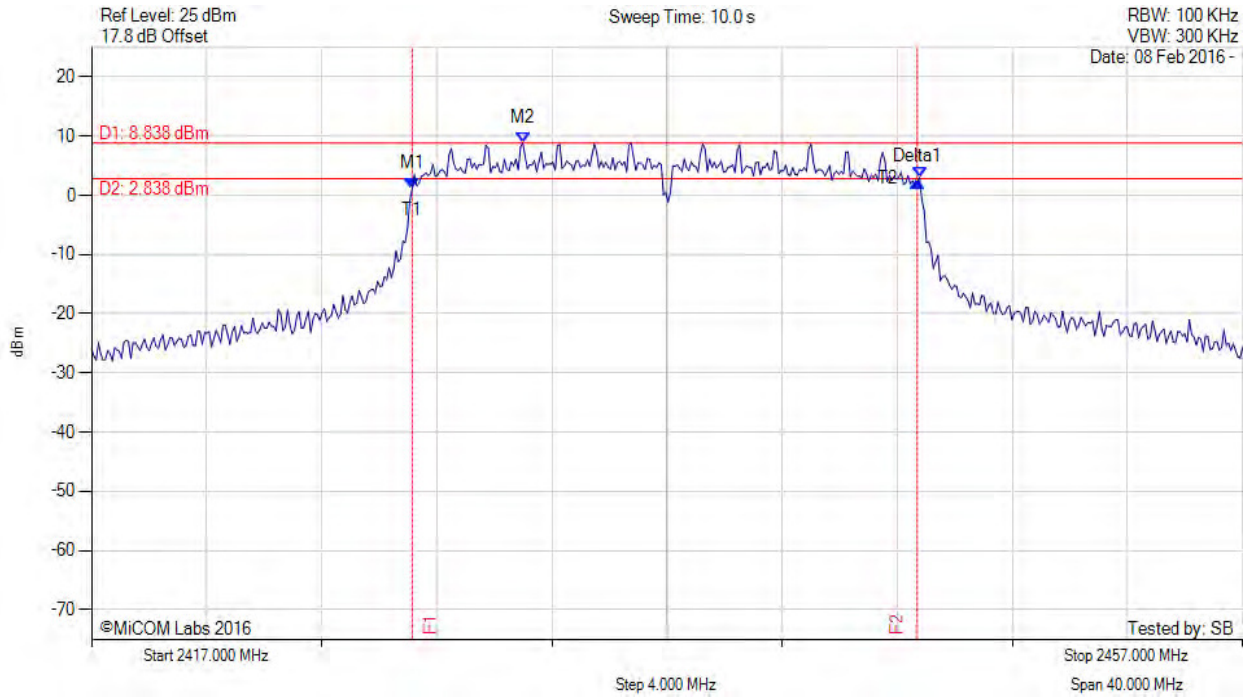

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2428.142 MHz : 1.053 dBm M2 : 2431.990 MHz : 8.838 dBm Delta1 : 17.555 MHz : 1.165 dB T1 : 2428.142 MHz : 1.053 dBm T2 : 2445.778 MHz : 2.983 dBm OBW : 17.635 MHz	Measured 6 dB Bandwidth: 17.555 MHz Limit: ≥500.0 kHz Margin: -17.06 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






6 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

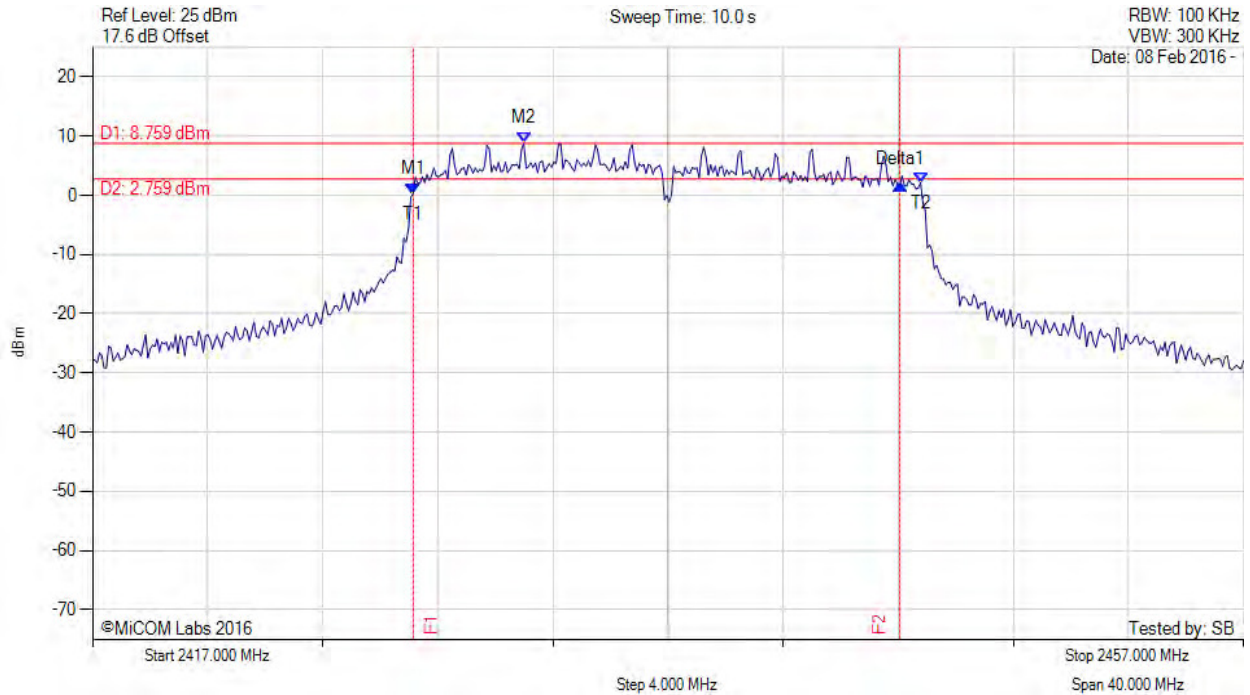

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2428.142 MHz : 0.300 dBm M2 : 2431.990 MHz : 8.759 dBm Delta1 : 16.914 MHz : 1.479 dB T1 : 2428.142 MHz : 0.300 dBm T2 : 2445.778 MHz : 2.165 dBm OBW : 17.635 MHz	Measured 6 dB Bandwidth: 16.914 MHz Limit: ≥500.0 kHz Margin: -16.41 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

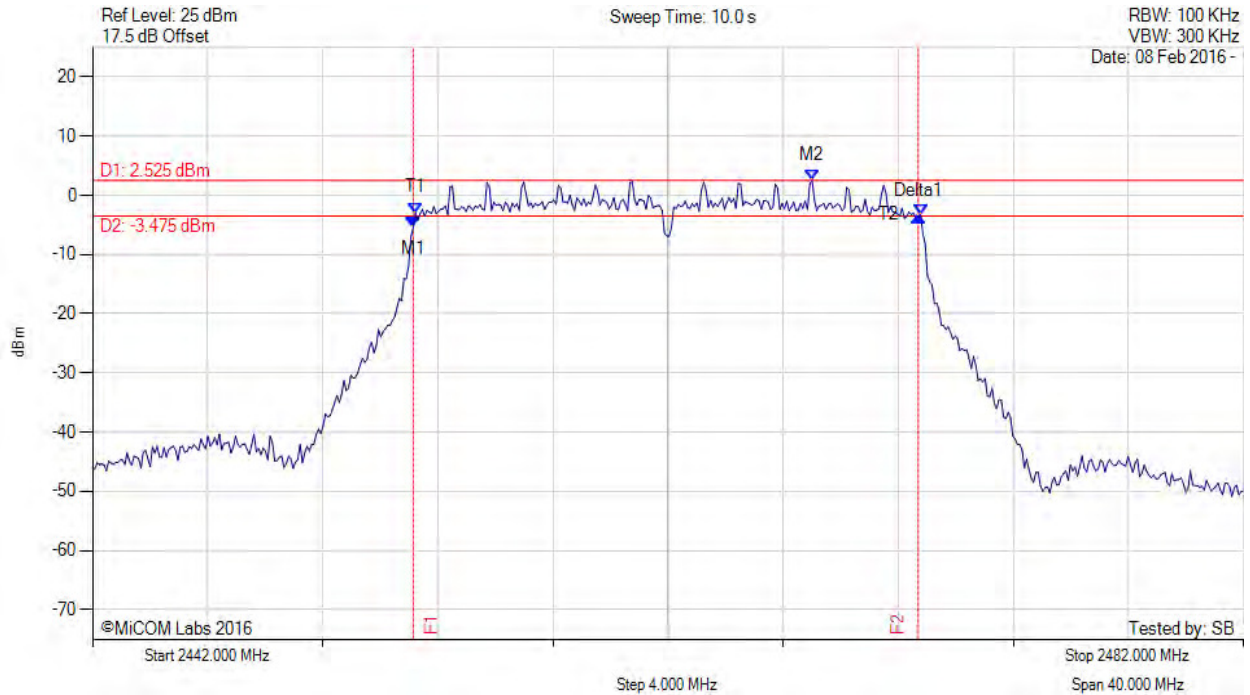

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2453.142 MHz : -5.449 dBm M2 : 2467.010 MHz : 2.525 dBm Delta1 : 17.555 MHz : 1.891 dB T1 : 2453.222 MHz : -2.962 dBm T2 : 2470.778 MHz : -3.237 dBm OBW : 17.555 MHz	Measured 6 dB Bandwidth: 17.555 MHz Limit: ≥500.0 kHz Margin: -17.06 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

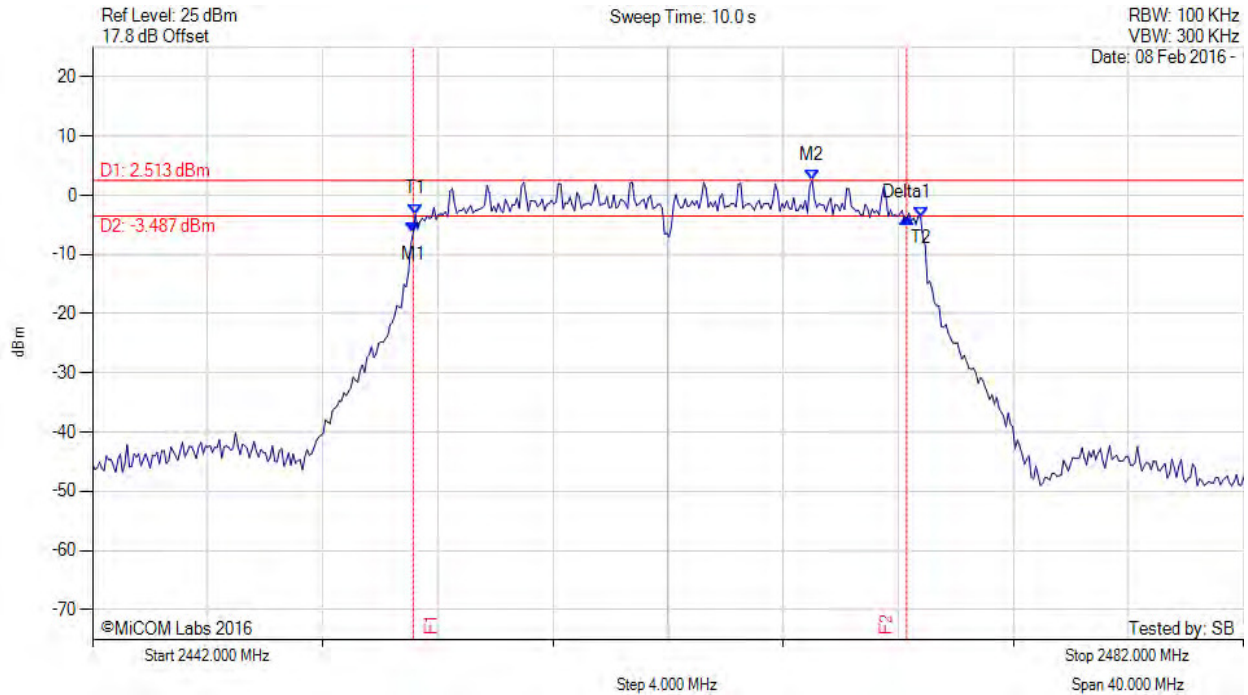

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2453.142 MHz : -6.336 dBm M2 : 2467.010 MHz : 2.513 dBm Delta1 : 17.154 MHz : 2.514 dB T1 : 2453.222 MHz : -3.204 dBm T2 : 2470.778 MHz : -3.655 dBm OBW : 17.555 MHz	Measured 6 dB Bandwidth: 17.154 MHz Limit: ≥500.0 kHz Margin: -16.65 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

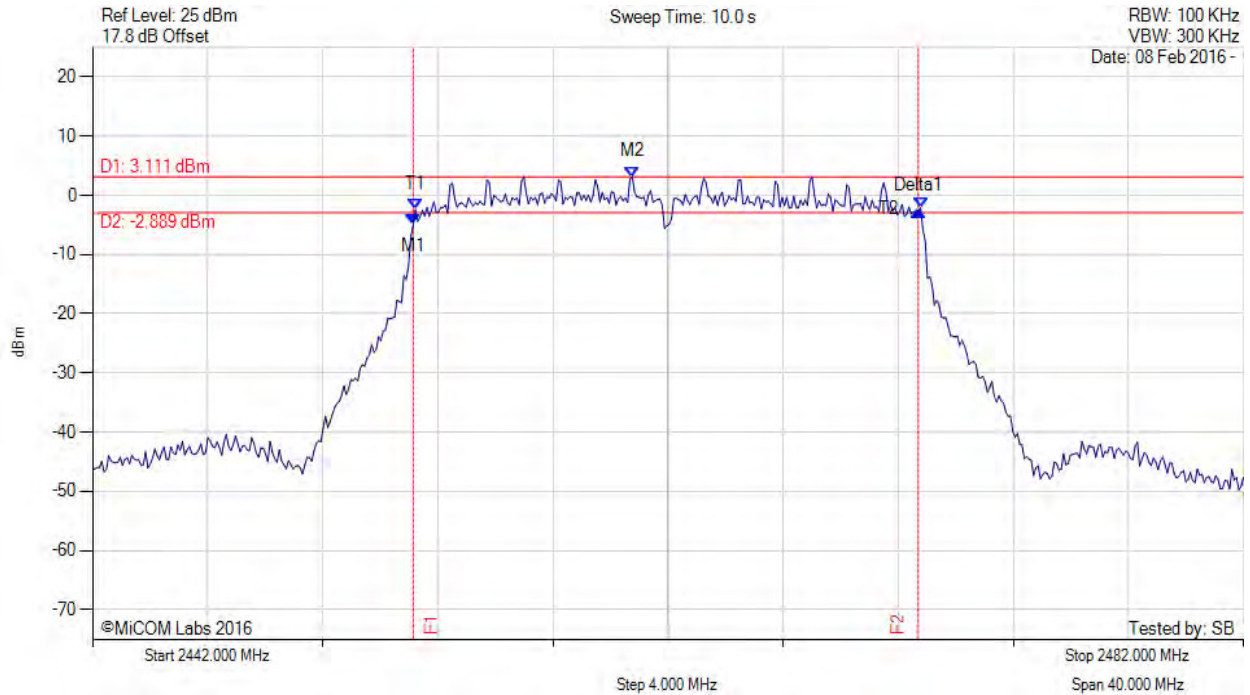

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2453.142 MHz : -4.959 dBm M2 : 2460.758 MHz : 3.111 dBm Delta1 : 17.555 MHz : 2.318 dB T1 : 2453.222 MHz : -2.407 dBm T2 : 2470.778 MHz : -2.112 dBm OBW : 17.555 MHz	Measured 6 dB Bandwidth: 17.555 MHz Limit: ≥500.0 kHz Margin: -17.06 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

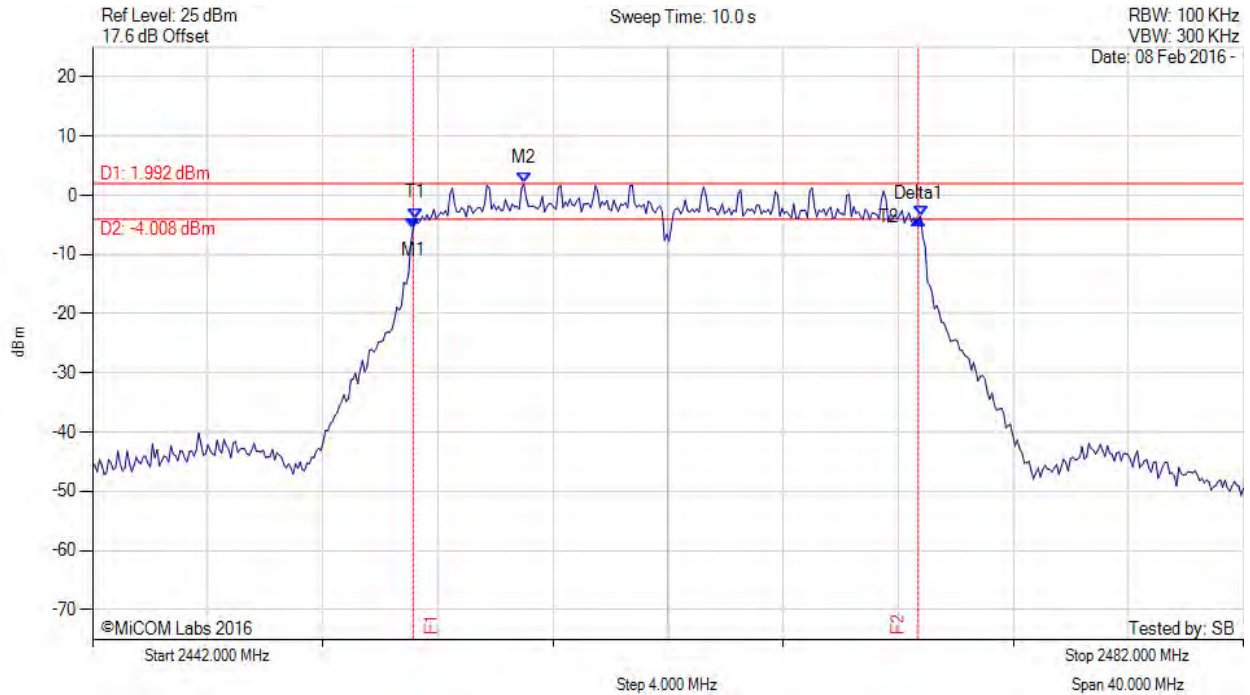

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2453.142 MHz : -5.655 dBm M2 : 2456.990 MHz : 1.992 dBm Delta1 : 17.555 MHz : 1.607 dB T1 : 2453.222 MHz : -3.902 dBm T2 : 2470.778 MHz : -3.515 dBm OBW : 17.555 MHz	Measured 6 dB Bandwidth: 17.555 MHz Limit: ≥500.0 kHz Margin: -17.06 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

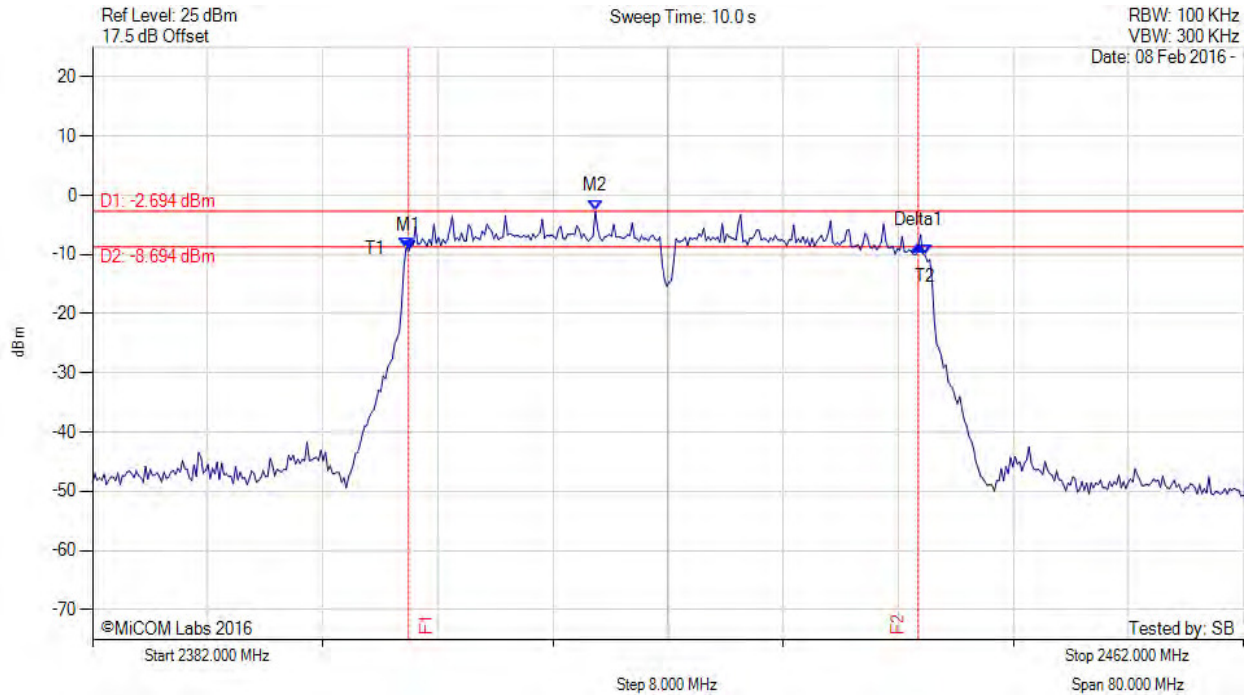

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2403.964 MHz : -9.470 dBm M2 : 2416.950 MHz : -2.694 dBm Delta1 : 35.431 MHz : 1.003 dB T1 : 2403.804 MHz : -8.901 dBm T2 : 2439.876 MHz : -10.178 dBm OBW : 36.072 MHz	Measured 6 dB Bandwidth: 35.431 MHz Limit: ≥500.0 kHz Margin: -34.93 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

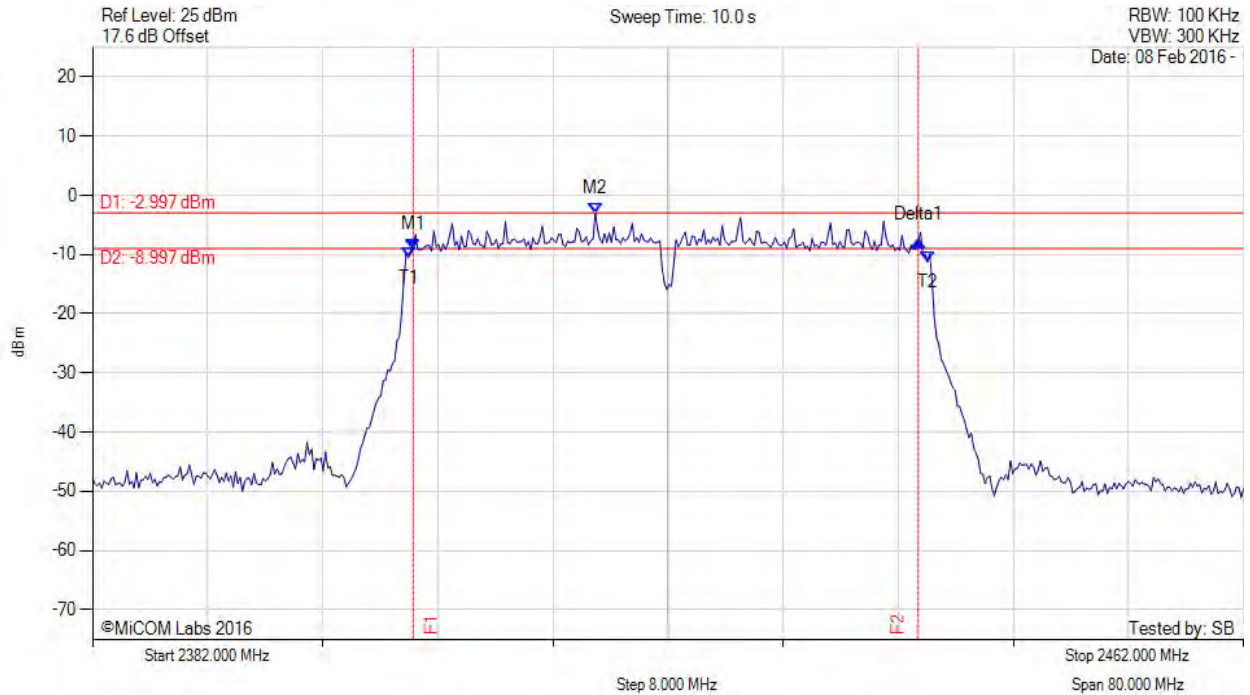

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2404.285 MHz : -9.116 dBm M2 : 2416.950 MHz : -2.997 dBm Delta1 : 35.110 MHz : 1.474 dB T1 : 2403.964 MHz : -10.452 dBm T2 : 2440.036 MHz : -11.211 dBm OBW : 36.072 MHz	Measured 6 dB Bandwidth: 35.110 MHz Limit: ≥500.0 kHz Margin: -34.61 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

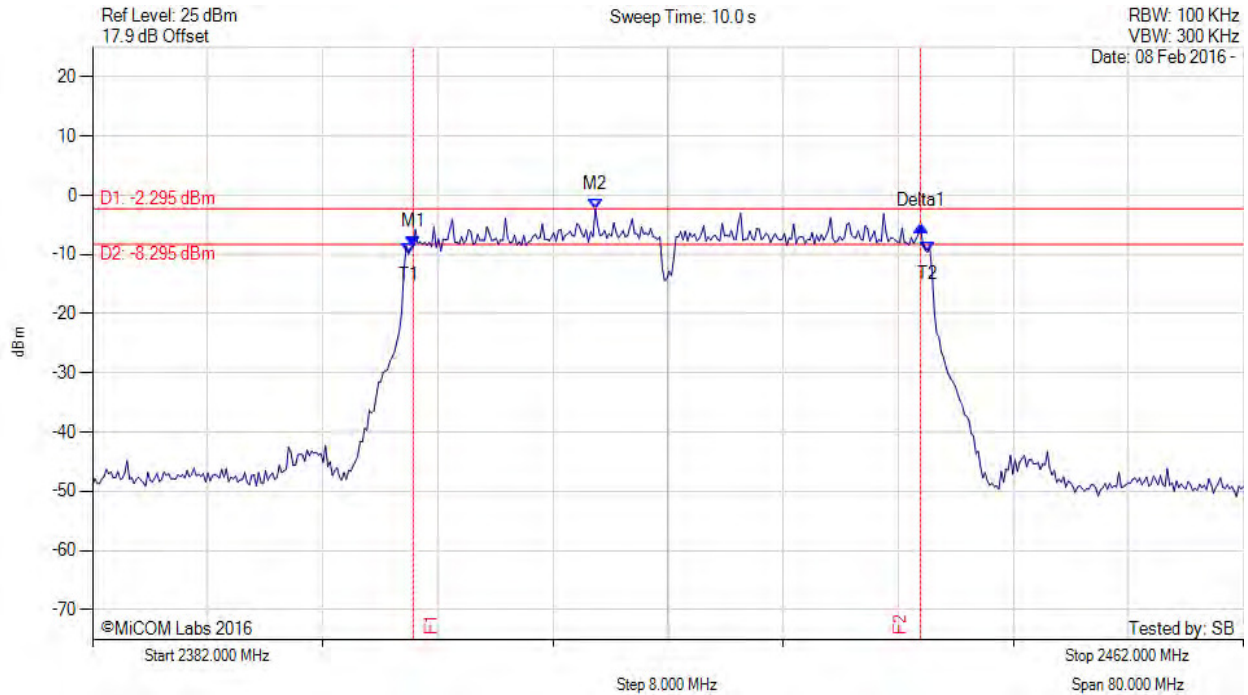

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2404.285 MHz : -8.722 dBm M2 : 2416.950 MHz : -2.295 dBm Delta1 : 35.271 MHz : 3.524 dB T1 : 2403.964 MHz : -9.923 dBm T2 : 2440.036 MHz : -9.610 dBm OBW : 36.072 MHz	Measured 6 dB Bandwidth: 35.271 MHz Limit: ≥500.0 kHz Margin: -34.77 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






6 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

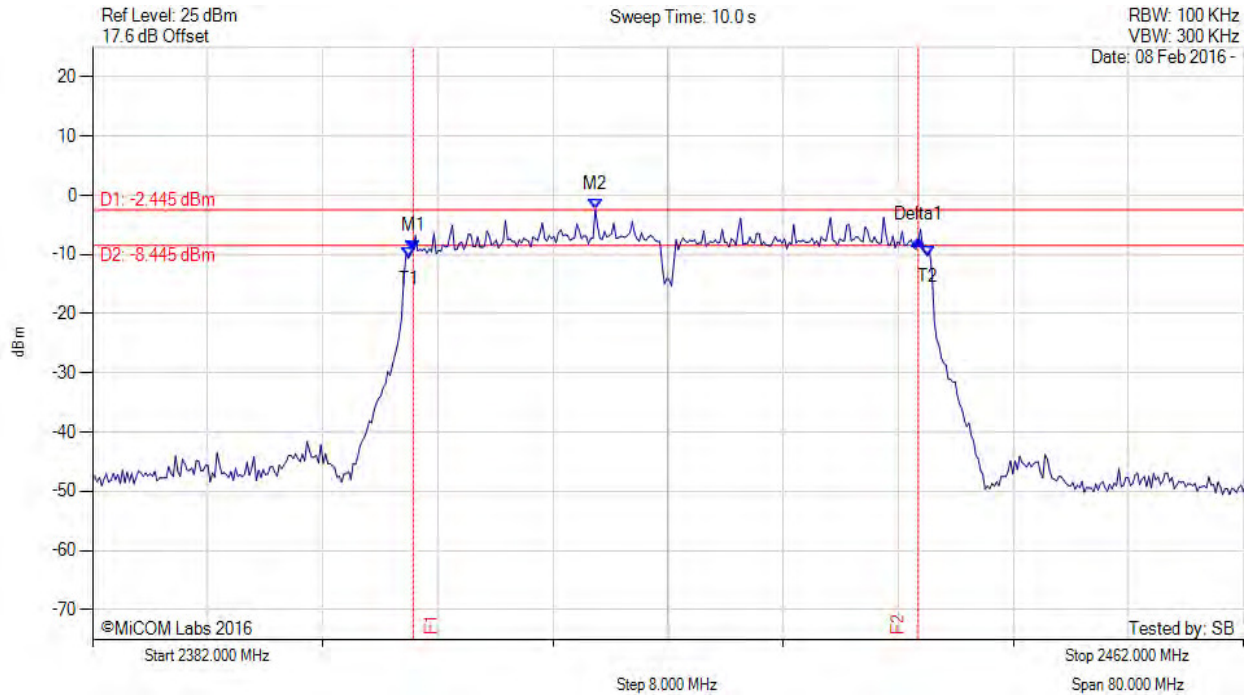

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2404.285 MHz : -9.352 dBm M2 : 2416.950 MHz : -2.445 dBm Delta1 : 35.110 MHz : 1.822 dB T1 : 2403.964 MHz : -10.601 dBm T2 : 2440.036 MHz : -10.255 dBm OBW : 36.072 MHz	Measured 6 dB Bandwidth: 35.110 MHz Limit: ≥500.0 kHz Margin: -34.61 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

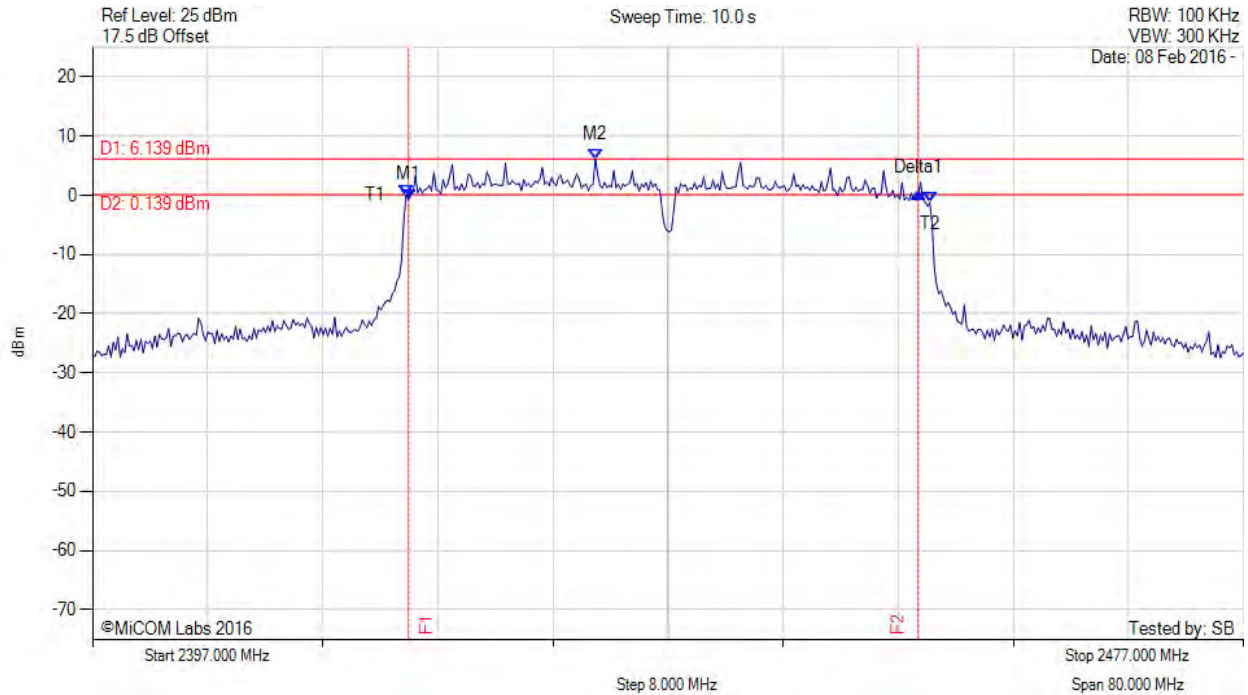

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2418.964 MHz : -0.652 dBm M2 : 2431.950 MHz : 6.139 dBm Delta1 : 35.431 MHz : 0.999 dB T1 : 2418.804 MHz : 0.048 dBm T2 : 2455.196 MHz : -1.231 dBm OBW : 36.393 MHz	Measured 6 dB Bandwidth: 35.431 MHz Limit: ≥500.0 kHz Margin: -34.93 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

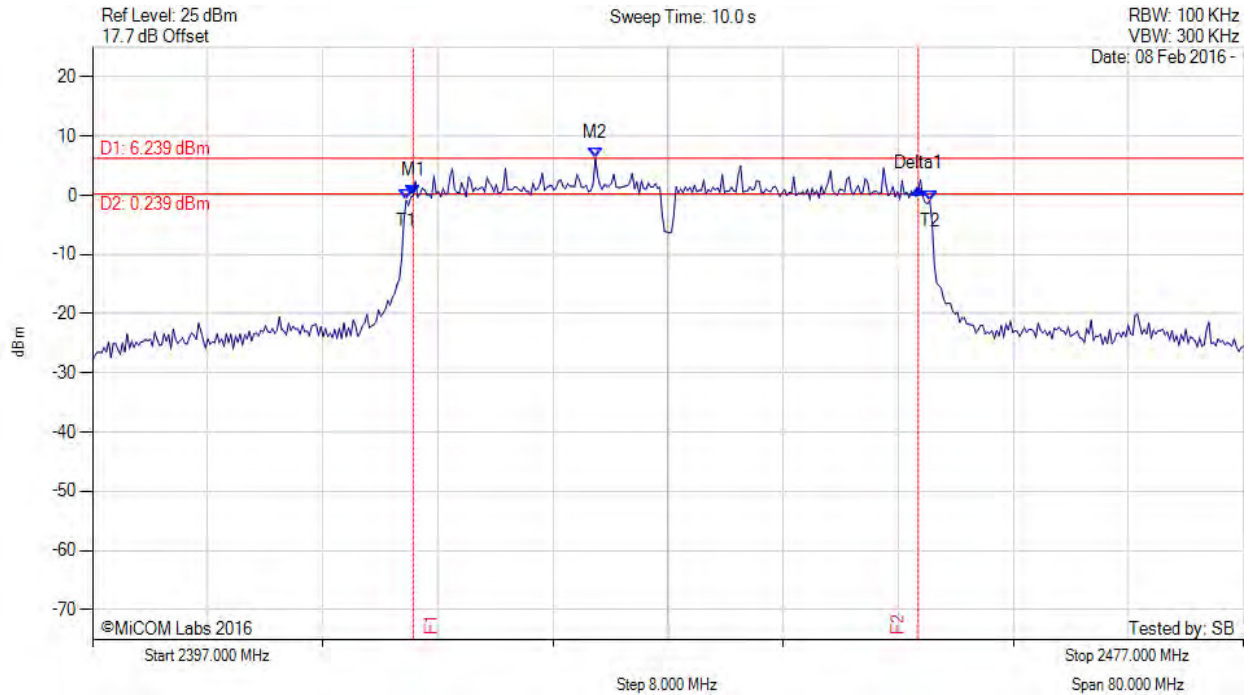

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2419.285 MHz : -0.086 dBm M2 : 2431.950 MHz : 6.239 dBm Delta1 : 35.110 MHz : 1.237 dB T1 : 2418.804 MHz : -0.818 dBm T2 : 2455.196 MHz : -0.873 dBm OBW : 36.393 MHz	Measured 6 dB Bandwidth: 35.110 MHz Limit: ≥500.0 kHz Margin: -34.61 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

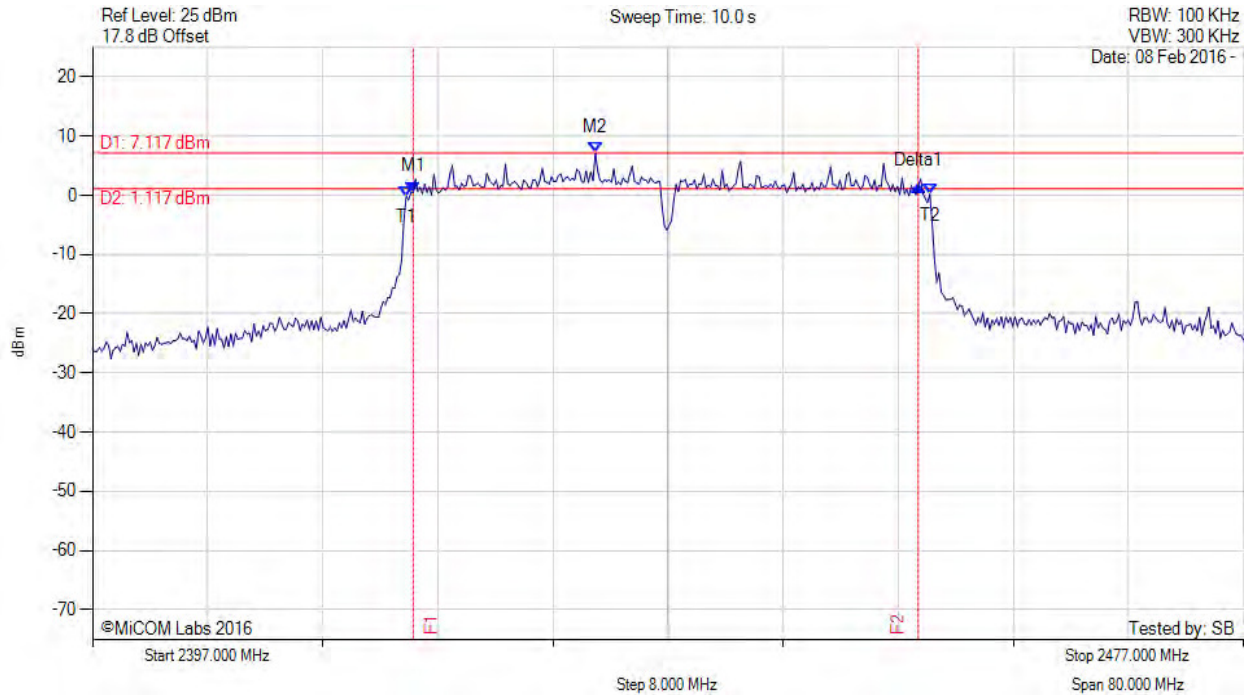

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2419.285 MHz : 0.556 dBm M2 : 2431.950 MHz : 7.117 dBm Delta1 : 35.110 MHz : 1.086 dB T1 : 2418.804 MHz : -0.214 dBm T2 : 2455.196 MHz : 0.190 dBm OBW : 36.393 MHz	Measured 6 dB Bandwidth: 35.110 MHz Limit: ≥500.0 kHz Margin: -34.61 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

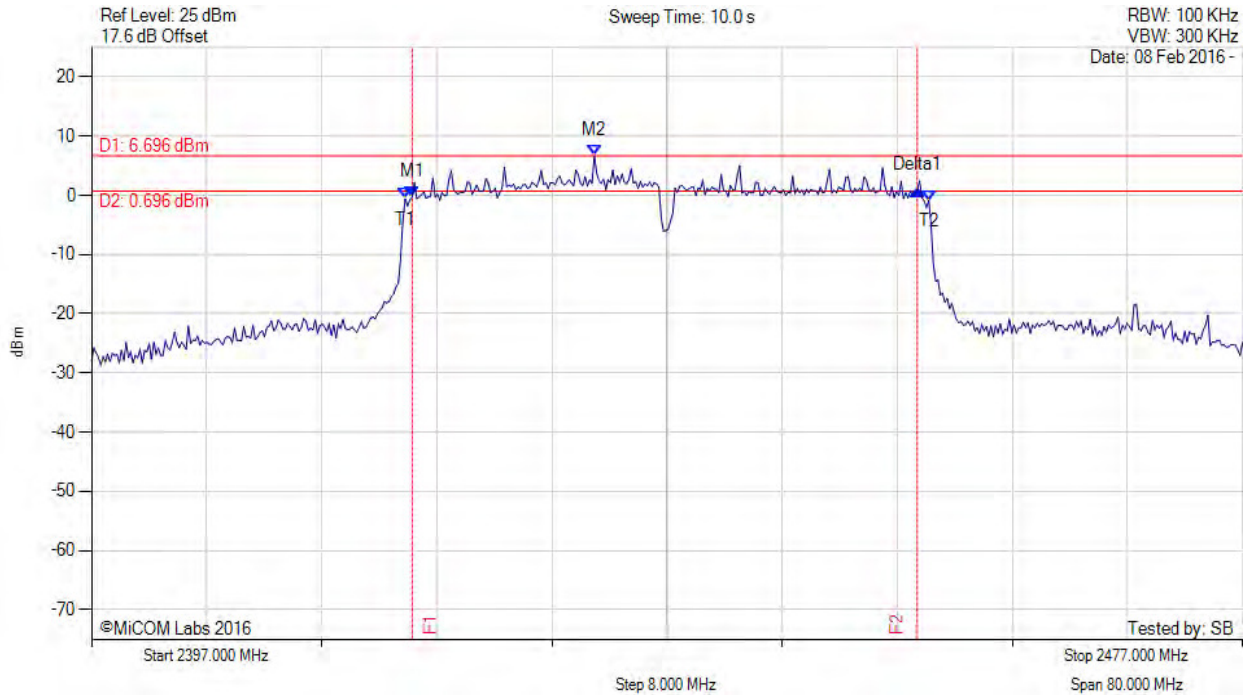

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2419.285 MHz : -0.312 dBm M2 : 2431.950 MHz : 6.696 dBm Delta1 : 35.110 MHz : 1.224 dB T1 : 2418.804 MHz : -0.585 dBm T2 : 2455.196 MHz : -0.883 dBm OBW : 36.393 MHz	Measured 6 dB Bandwidth: 35.110 MHz Limit: ≥500.0 kHz Margin: -34.61 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

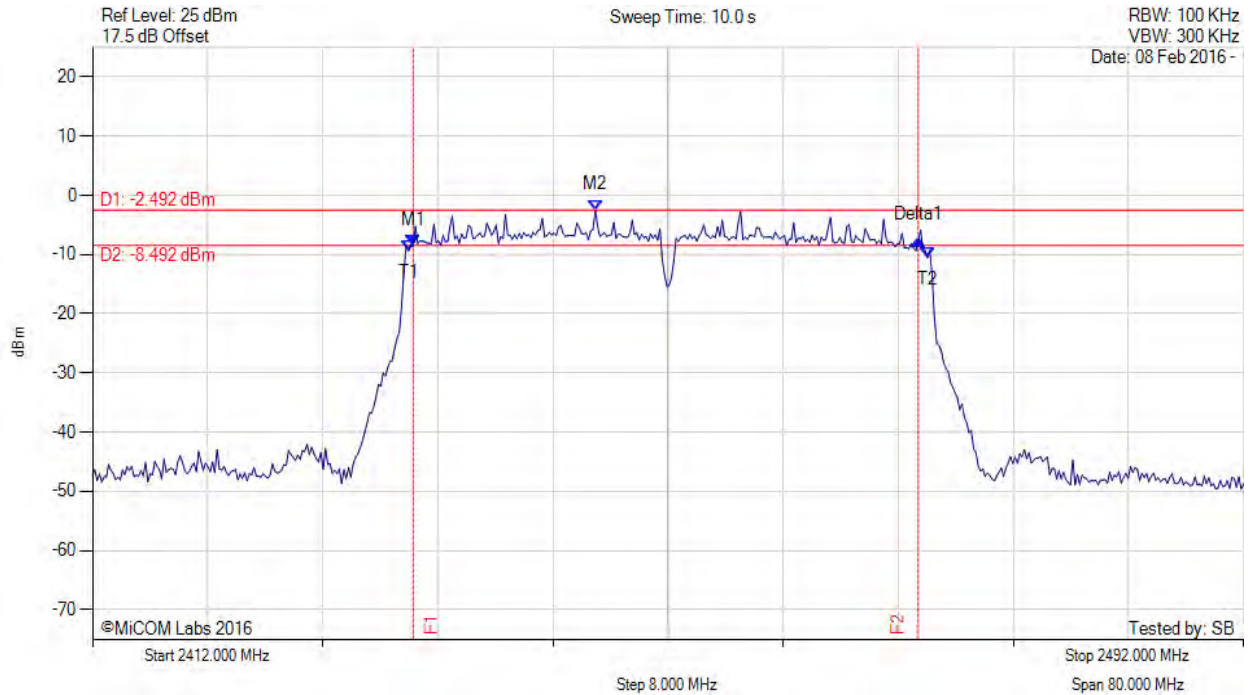

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2434.285 MHz : -8.498 dBm M2 : 2446.950 MHz : -2.492 dBm Delta1 : 35.110 MHz : 0.931 dB T1 : 2433.964 MHz : -9.389 dBm T2 : 2470.036 MHz : -10.544 dBm OBW : 36.072 MHz	Measured 6 dB Bandwidth: 35.110 MHz Limit: ≥500.0 kHz Margin: -34.61 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

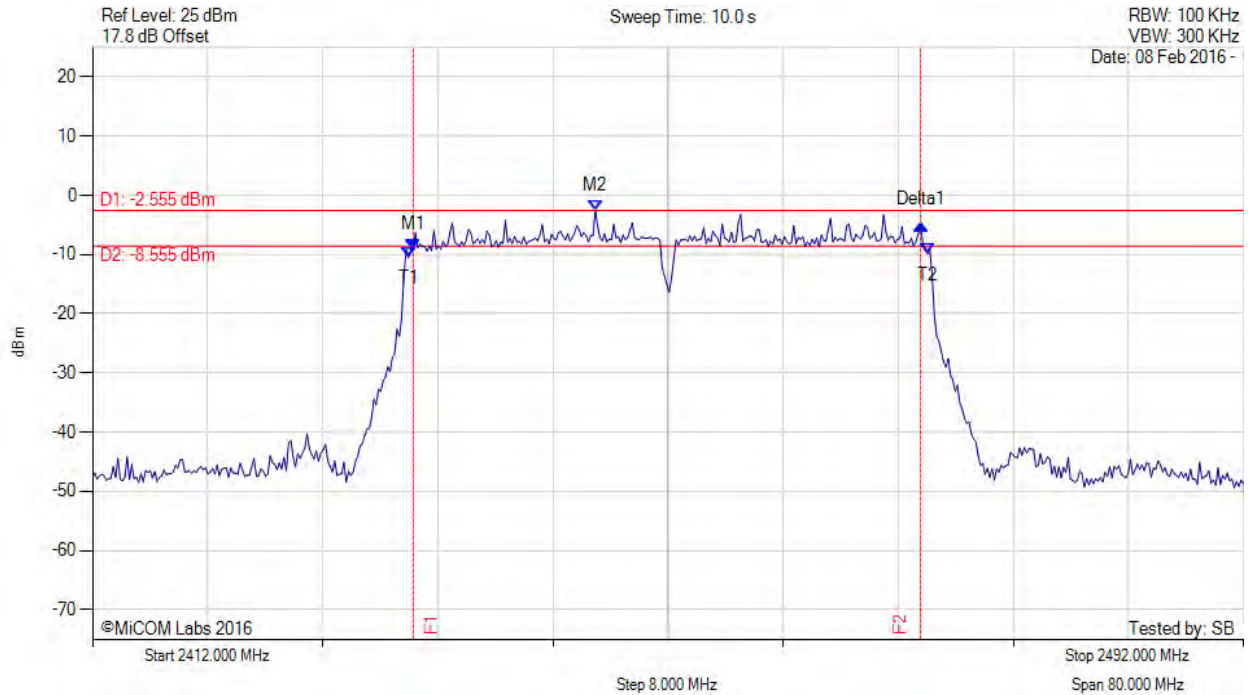

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2434.285 MHz : -9.092 dBm M2 : 2446.950 MHz : -2.555 dBm Delta1 : 35.271 MHz : 4.236 dB T1 : 2433.964 MHz : -10.460 dBm T2 : 2470.036 MHz : -9.873 dBm OBW : 36.072 MHz	Measured 6 dB Bandwidth: 35.271 MHz Limit: ≥500.0 kHz Margin: -34.77 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

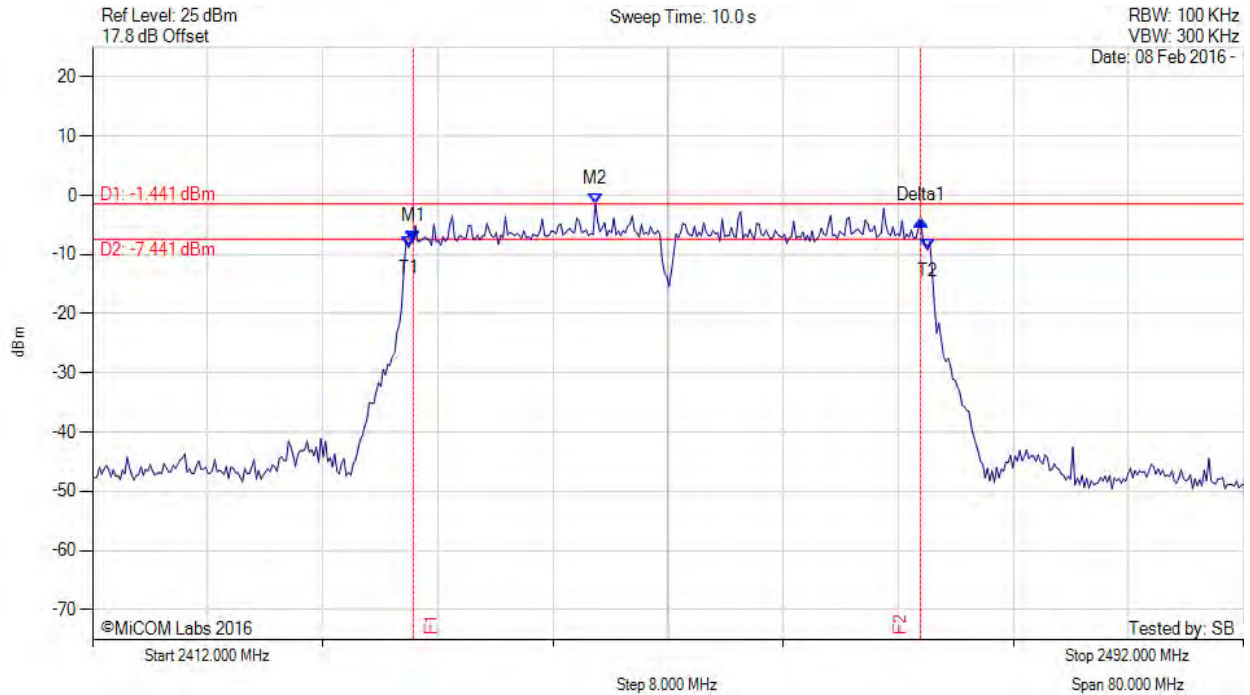

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2434.285 MHz : -7.819 dBm M2 : 2446.950 MHz : -1.441 dBm Delta1 : 35.271 MHz : 3.531 dB T1 : 2433.964 MHz : -8.770 dBm T2 : 2470.036 MHz : -9.238 dBm OBW : 36.072 MHz	Measured 6 dB Bandwidth: 35.271 MHz Limit: ≥500.0 kHz Margin: -34.77 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






6 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

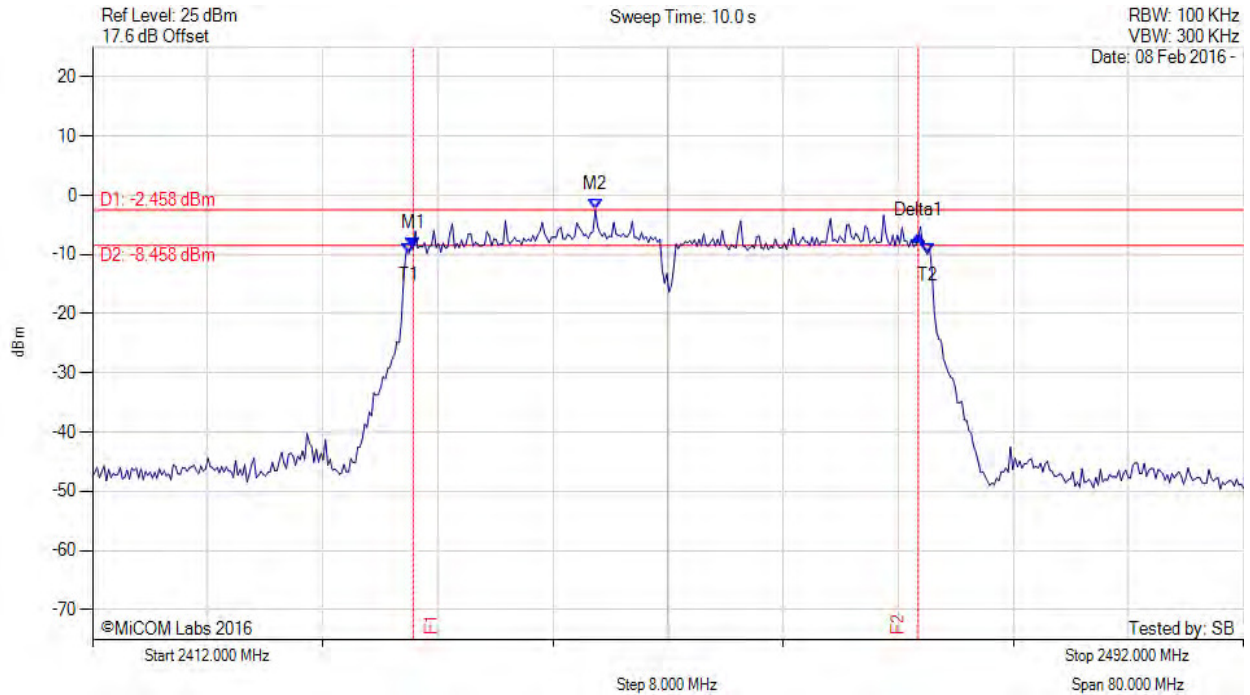

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 2434.285 MHz : -8.994 dBm M2 : 2446.950 MHz : -2.458 dBm Delta1 : 35.110 MHz : 2.089 dB T1 : 2433.964 MHz : -9.917 dBm T2 : 2470.036 MHz : -9.942 dBm OBW : 36.072 MHz	Measured 6 dB Bandwidth: 35.110 MHz Limit: ≥500.0 kHz Margin: -34.61 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 82 of 223

## A.2. Emissions

### A.2.1. Conducted Emissions

#### A.2.1.1. Conducted Spurious Emissions

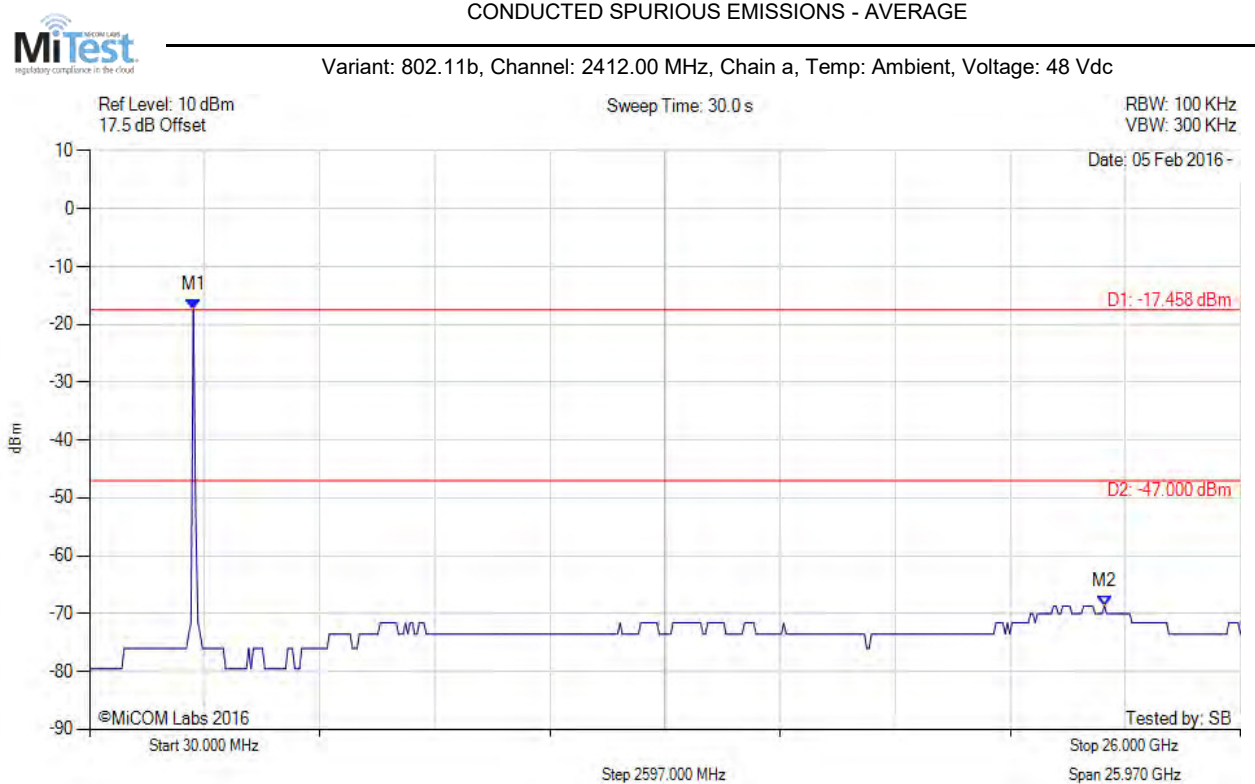

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2371.984 MHz : -17.458 dBm M2 : 22.929 GHz : -68.663 dBm	Limit: -47.00 dB Margin: -21.66 dB

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

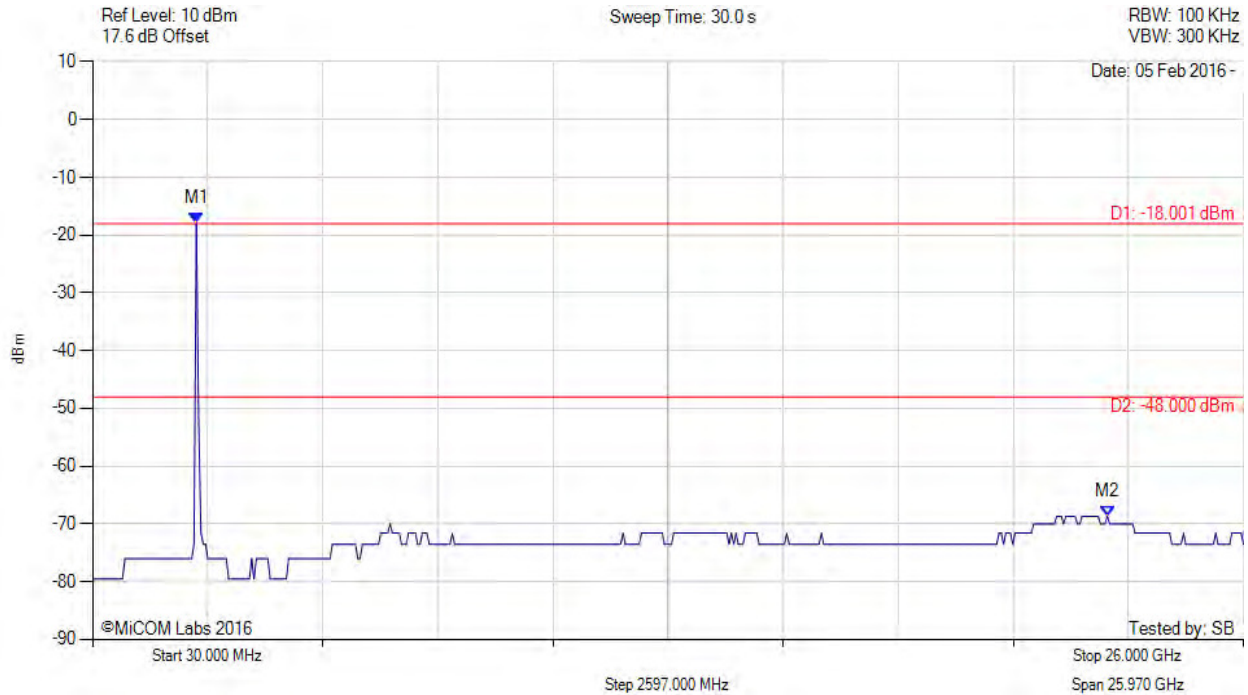

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2371.984 MHz : -18.001 dBm M2 : 22.929 GHz : -68.663 dBm	Limit: -48.00 dBm Margin: -20.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 84 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2412.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

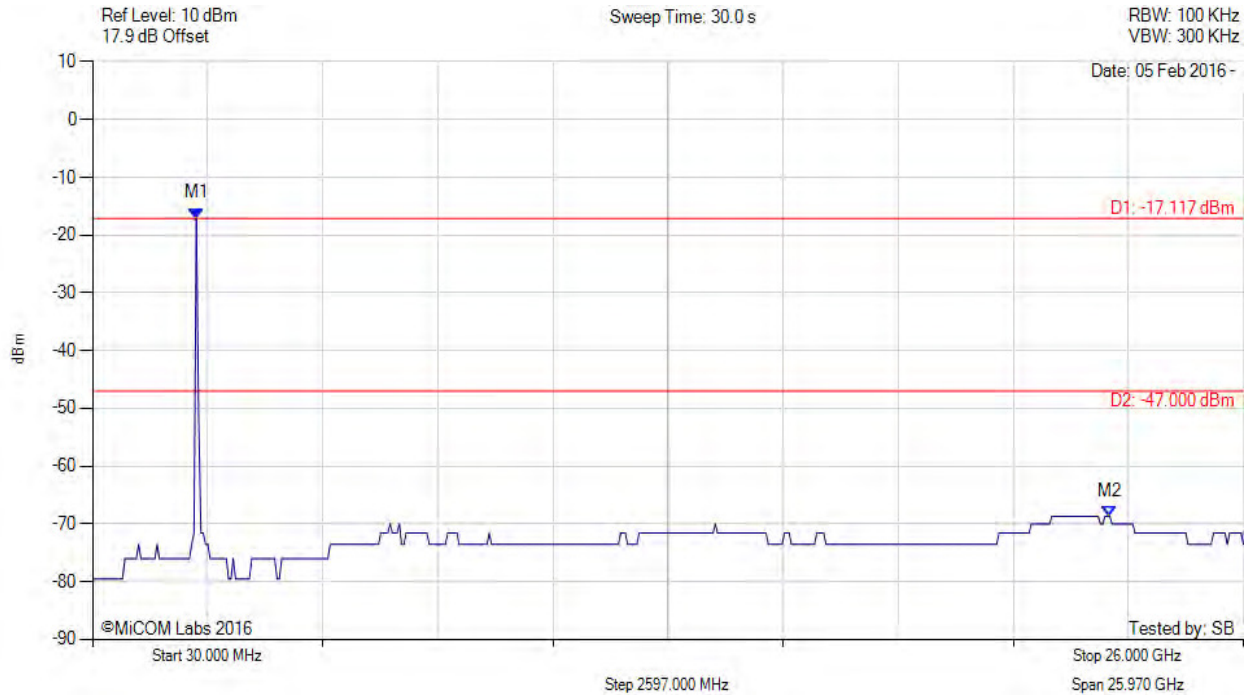

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2371.984 MHz : -17.117 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -47.00 dBm Margin: -21.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 85 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2412.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc



Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2371.984 MHz : -17.407 dBm M2 : 22.929 GHz : -68.663 dBm	Limit: -47.00 dBm Margin: -21.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 86 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

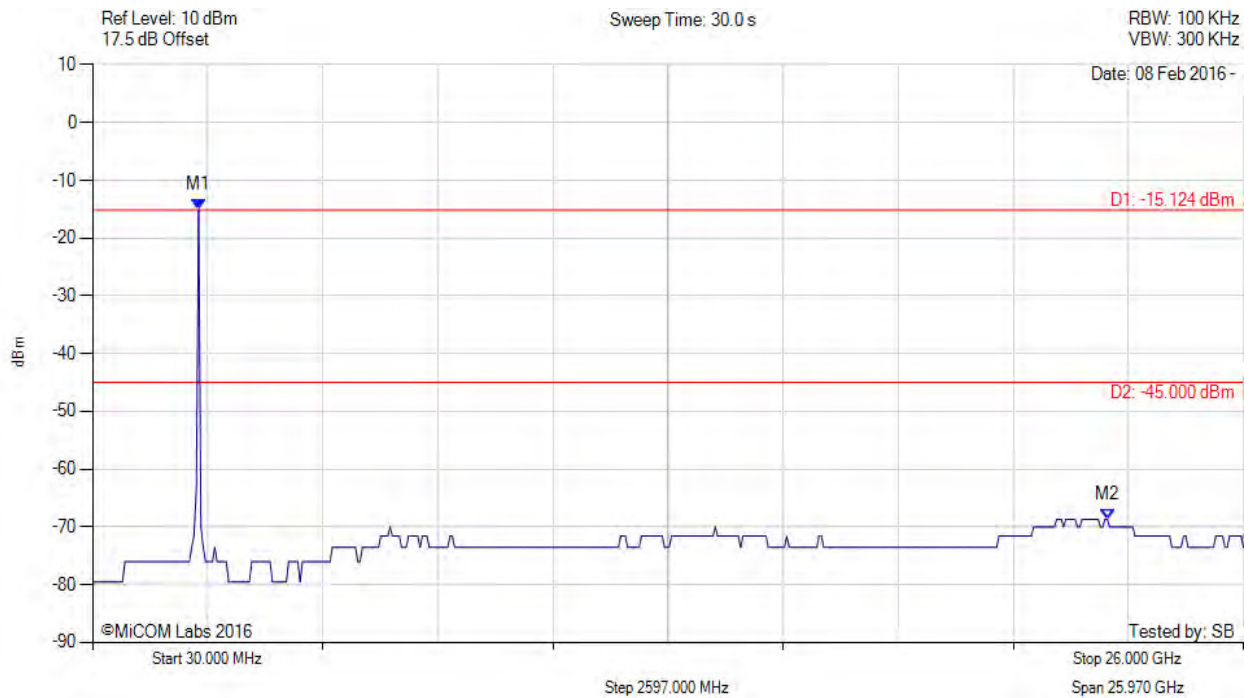

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -15.124 dBm M2 : 22.929 GHz : -68.663 dBm	Limit: -45.00 dBm Margin: -23.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 87 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc



Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -15.621 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -45.00 dBm Margin: -22.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 88 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

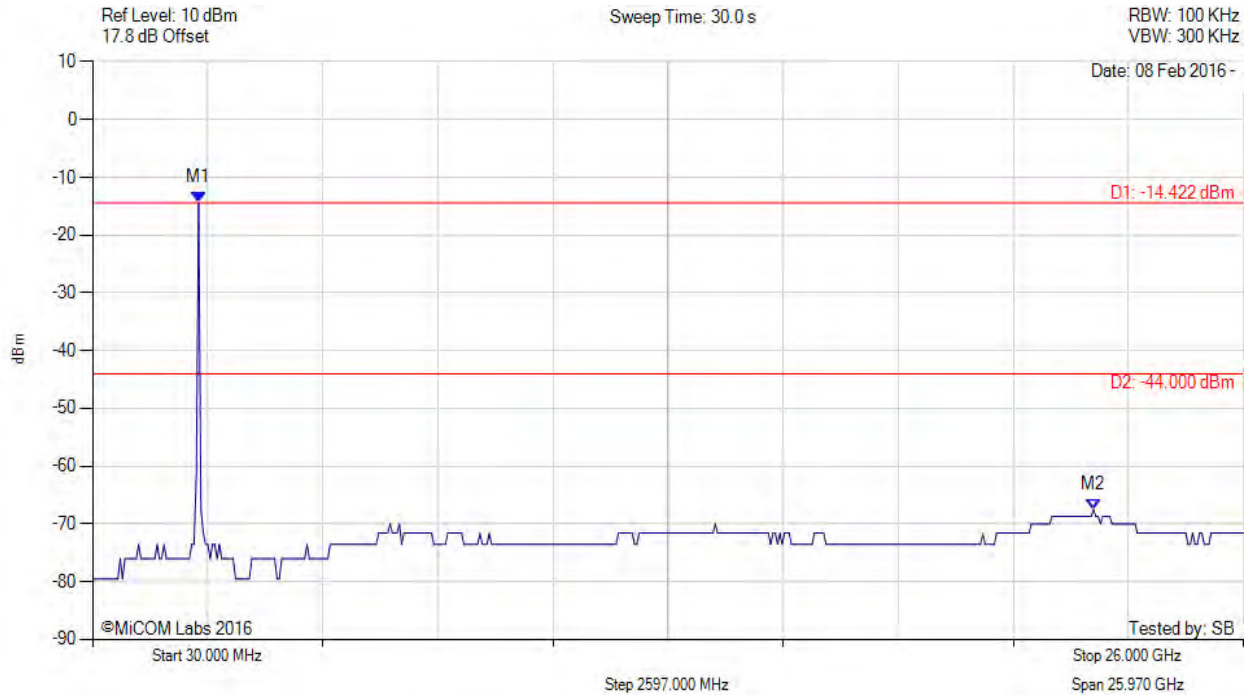

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -14.422 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -44.00 dBm Margin: -23.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 89 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2437.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

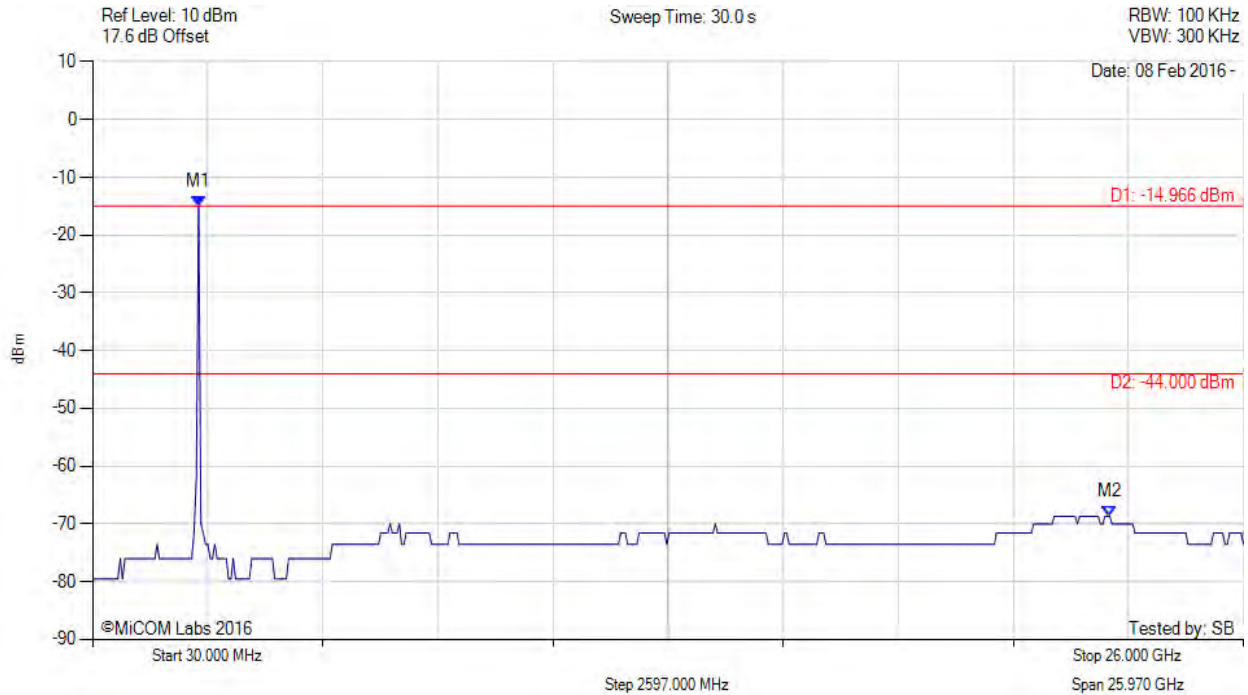

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -14.966 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -44.00 dBm Margin: -24.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 90 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2462.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

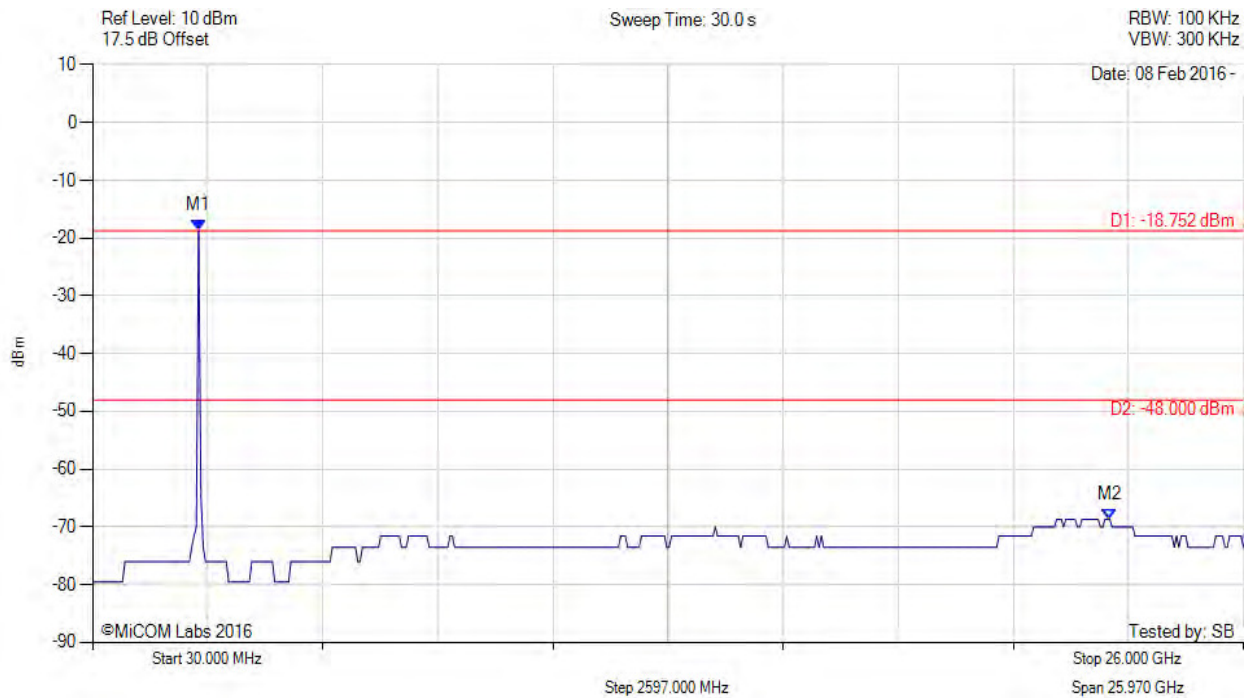

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -18.752 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -48.00 dBm Margin: -20.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 91 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2462.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

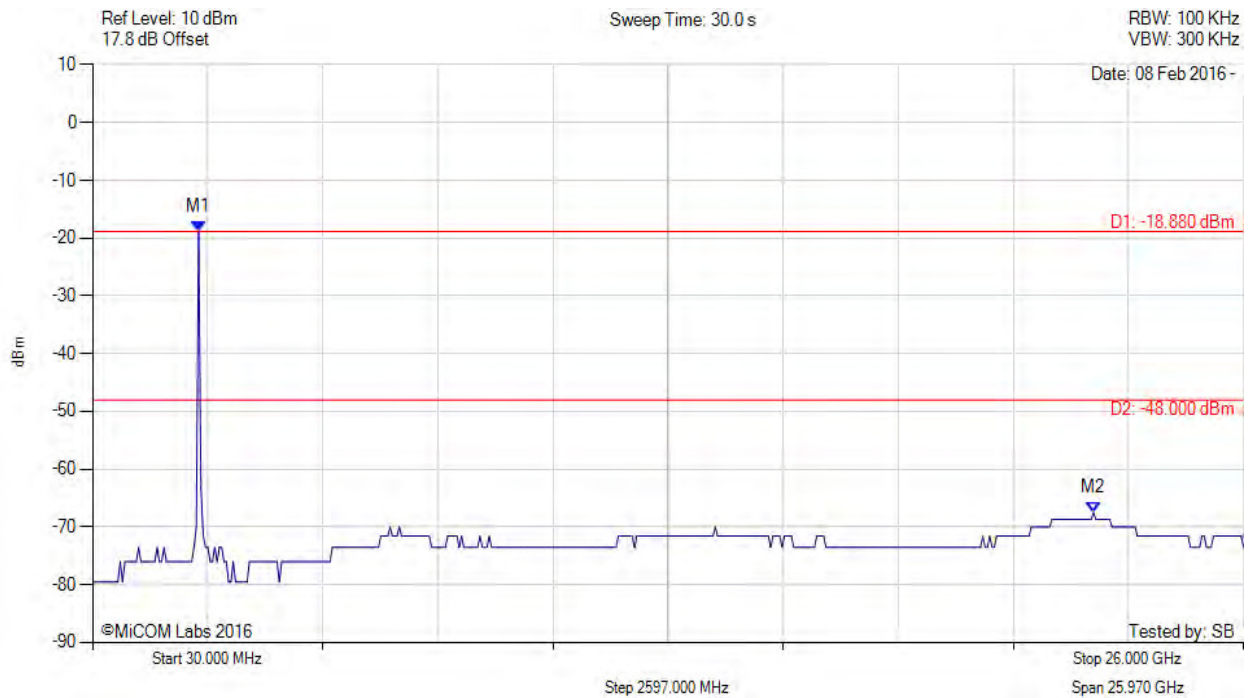

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -18.880 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -48.00 dBm Margin: -19.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 92 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2462.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

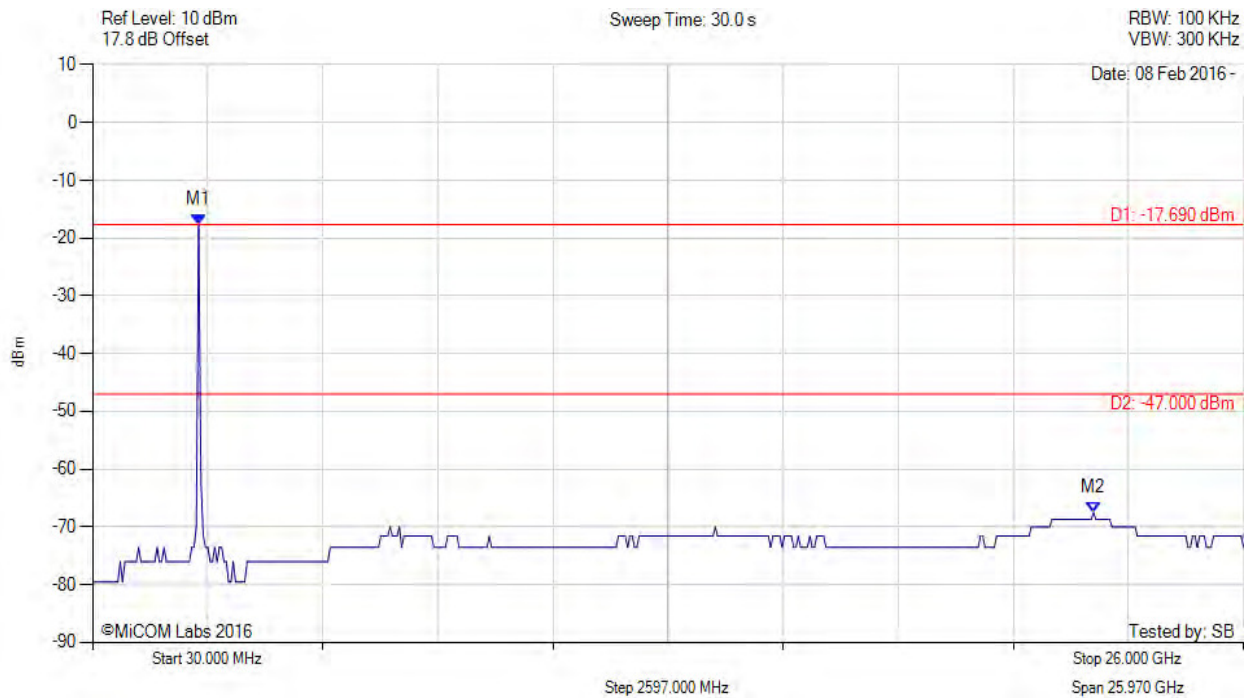

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -17.690 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -47.00 dBm Margin: -20.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 93 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2462.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

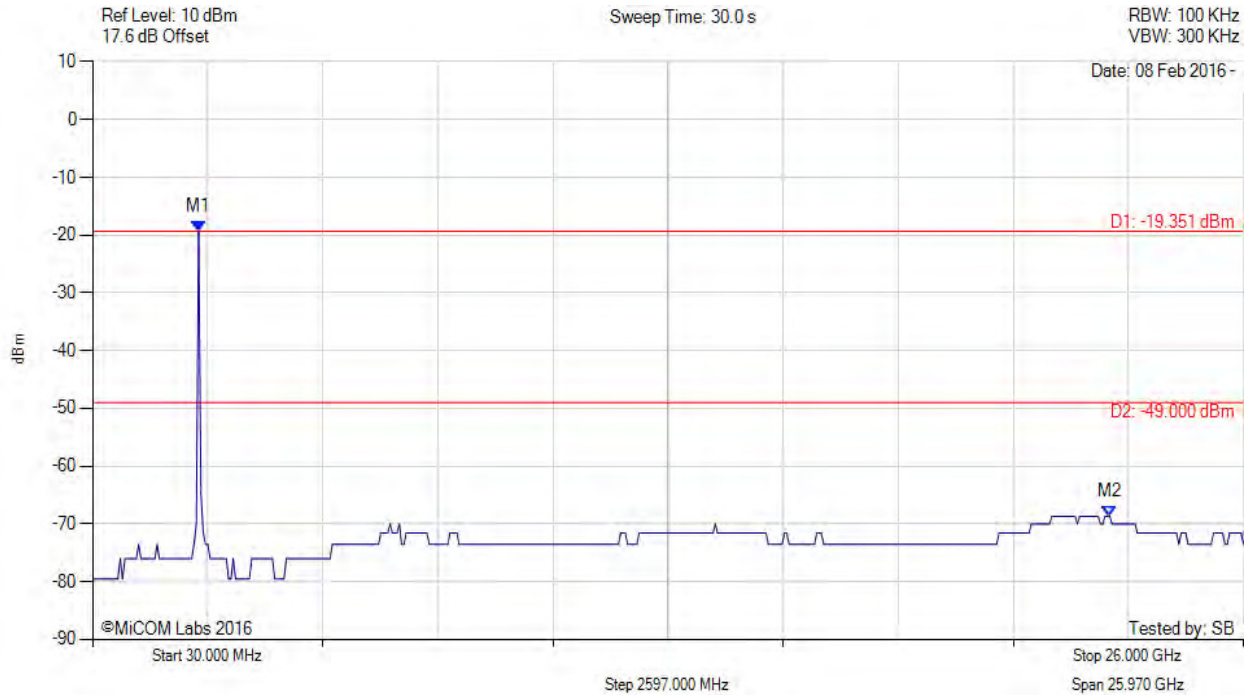

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -19.351 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -49.00 dBm Margin: -19.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 94 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2412.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

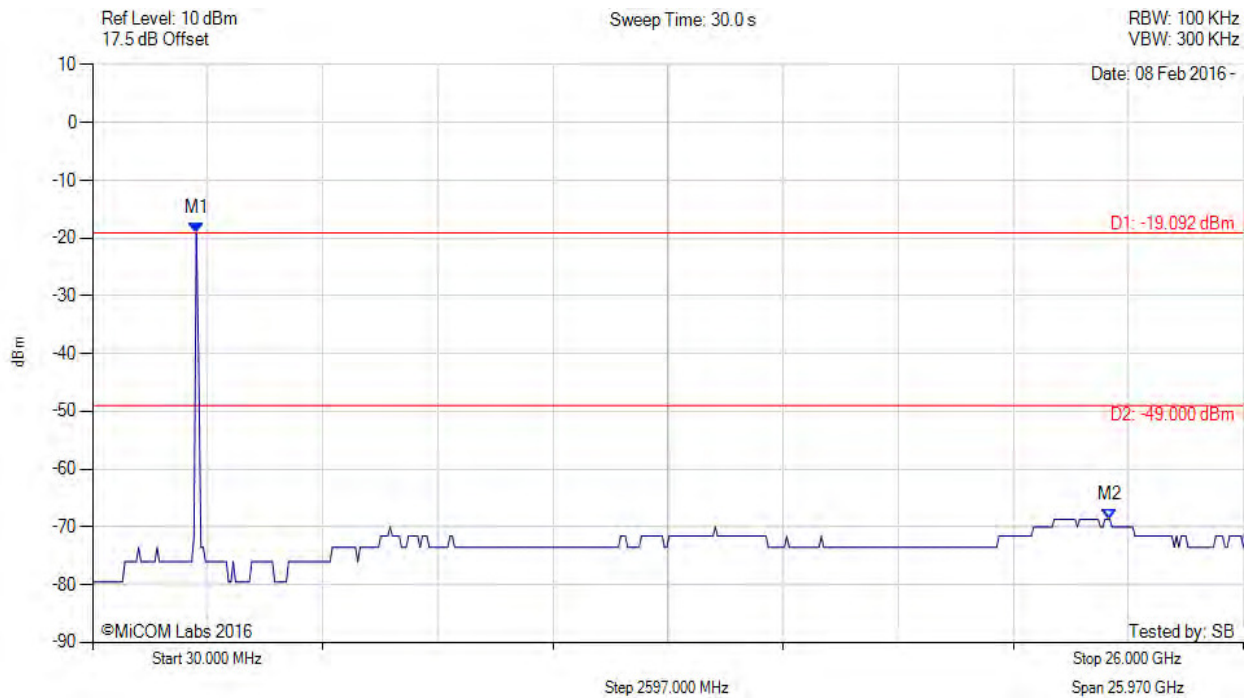

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2371.984 MHz : -19.092 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -49.00 dBm Margin: -19.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 95 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

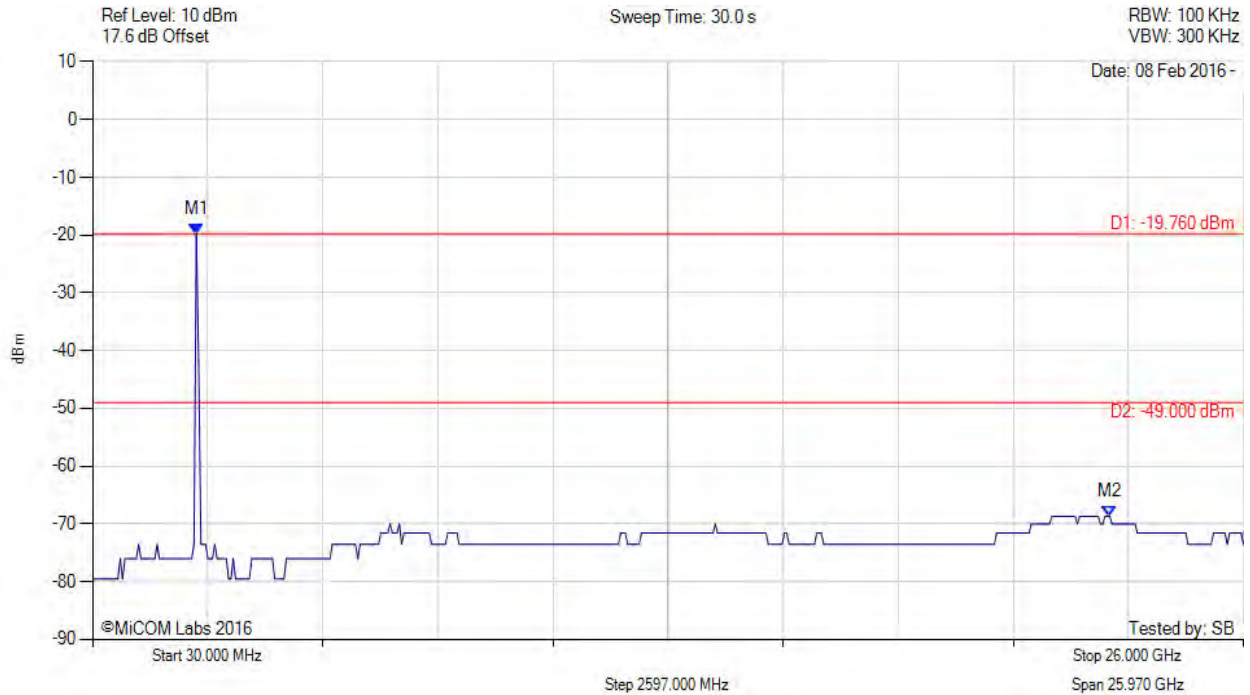

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2371.984 MHz : -19.760 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -49.00 dBm Margin: -19.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 96 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2412.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

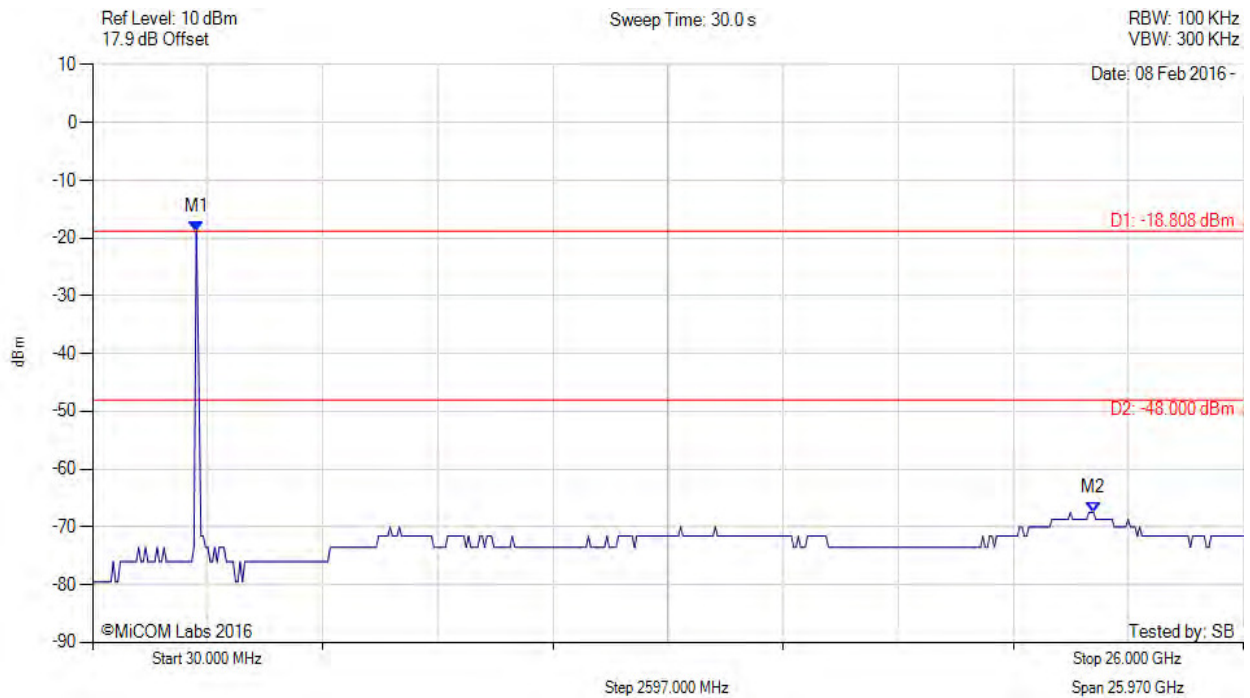

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2371.984 MHz : -18.808 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -48.00 dBm Margin: -19.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 97 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2412.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

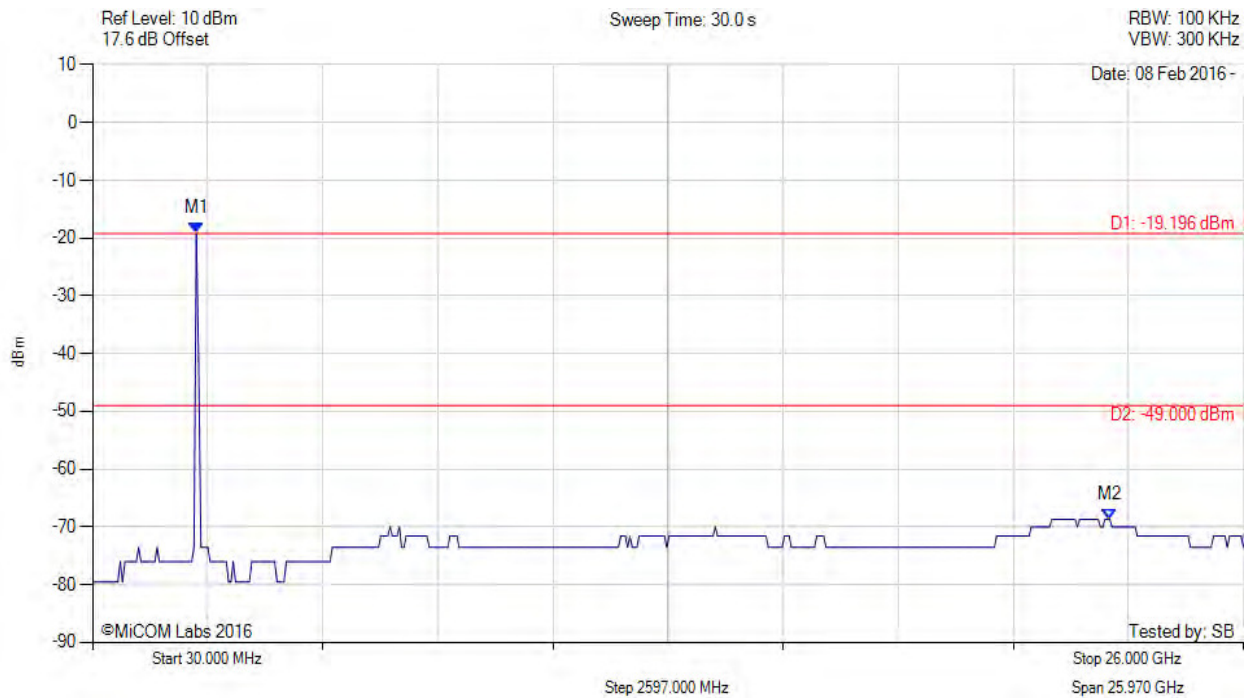

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2371.984 MHz : -19.196 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -49.00 dBm Margin: -19.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 98 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

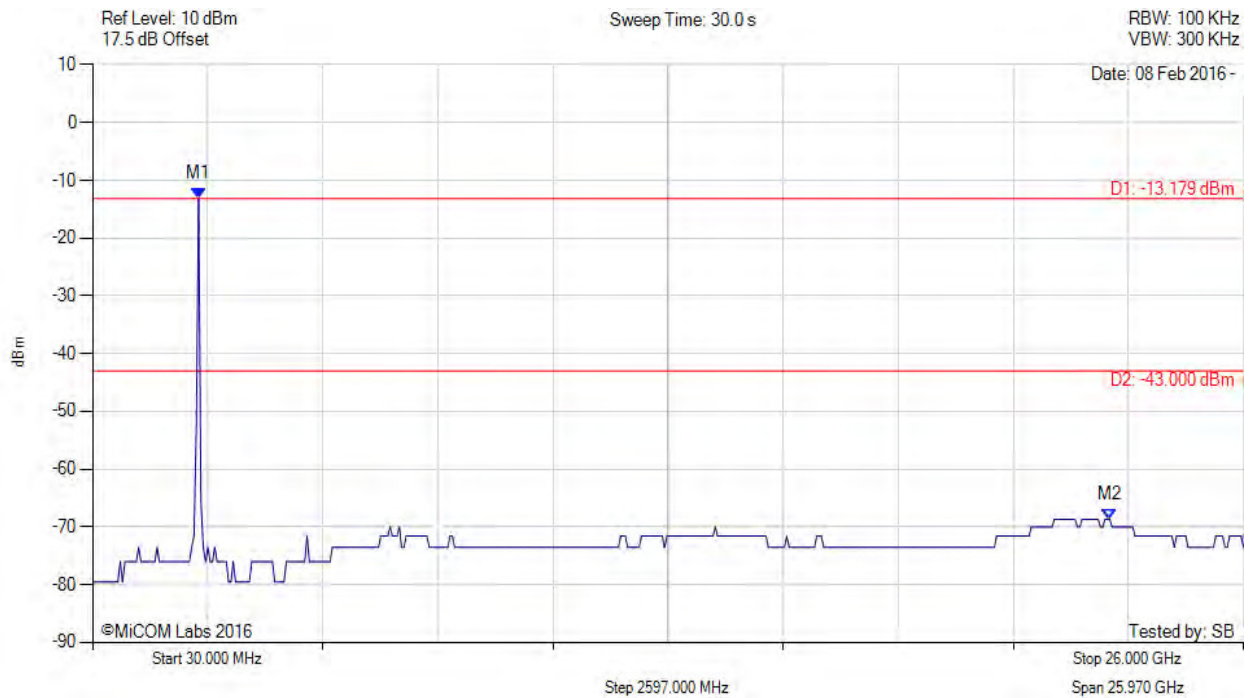

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -13.179 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -43.00 dBm Margin: -25.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 99 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

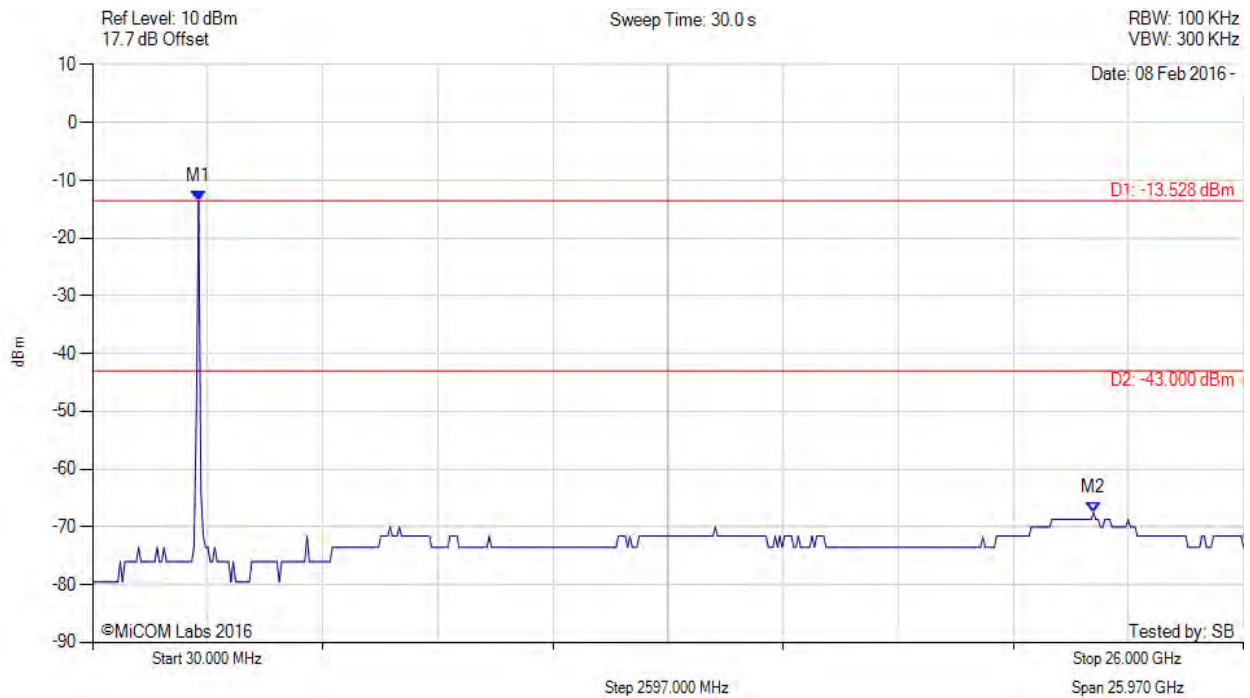

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -13.528 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -43.00 dBm Margin: -24.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 100 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

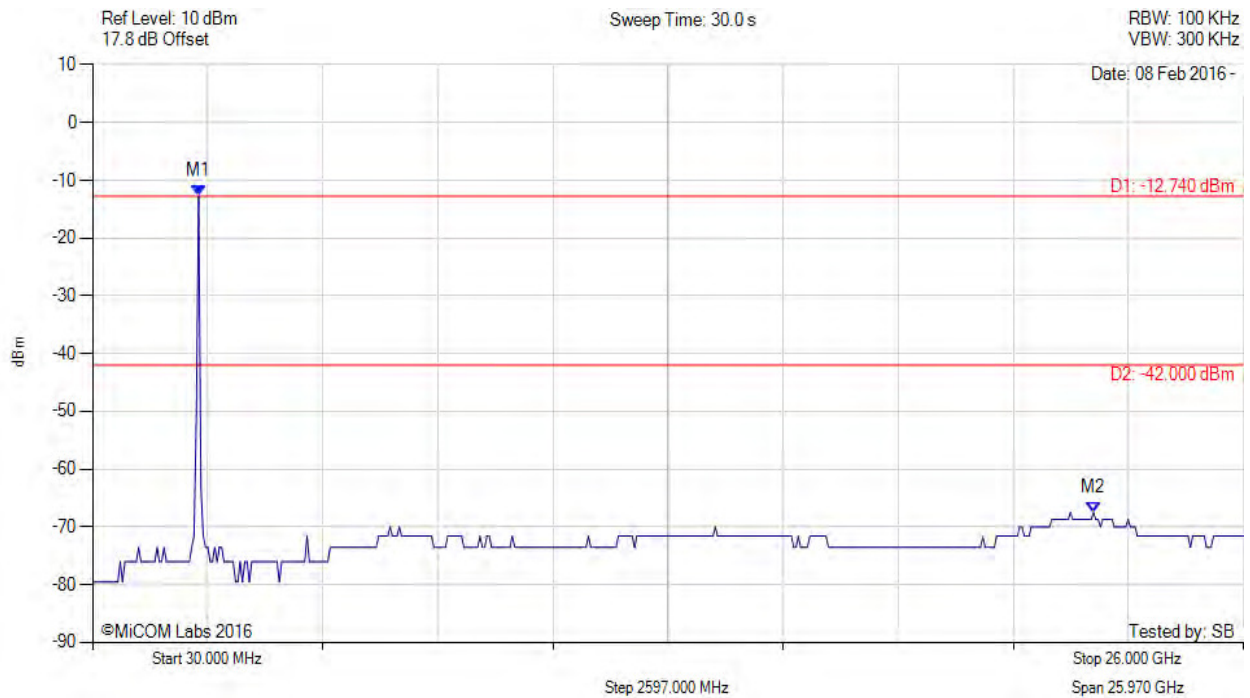

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -12.740 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -42.00 dBm Margin: -25.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 101 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2437.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

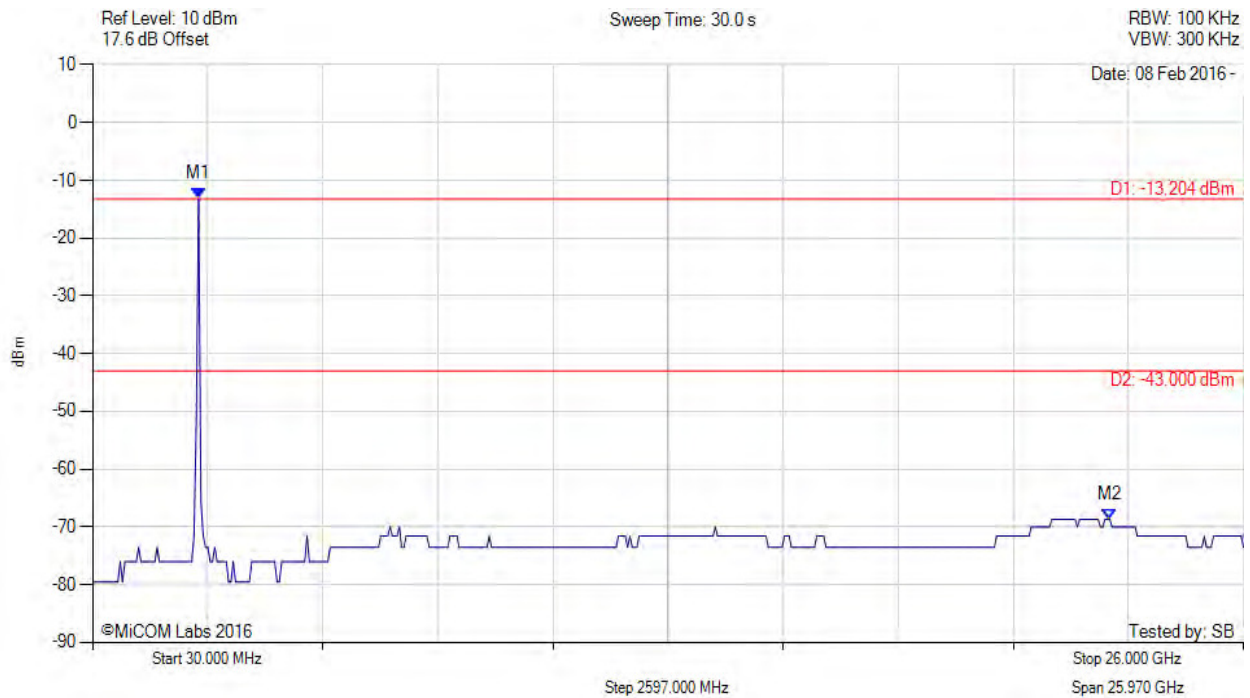

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -13.204 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -43.00 dBm Margin: -25.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 102 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2462.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

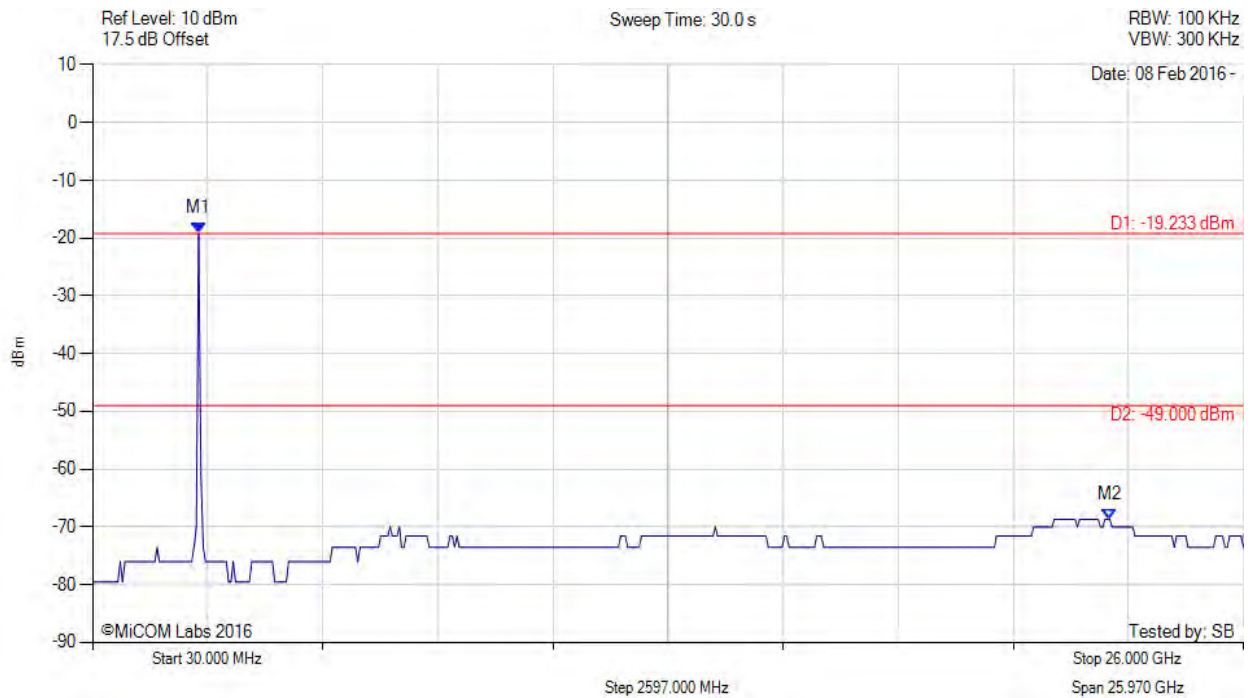

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -19.233 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -49.00 dBm Margin: -19.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 103 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2462.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

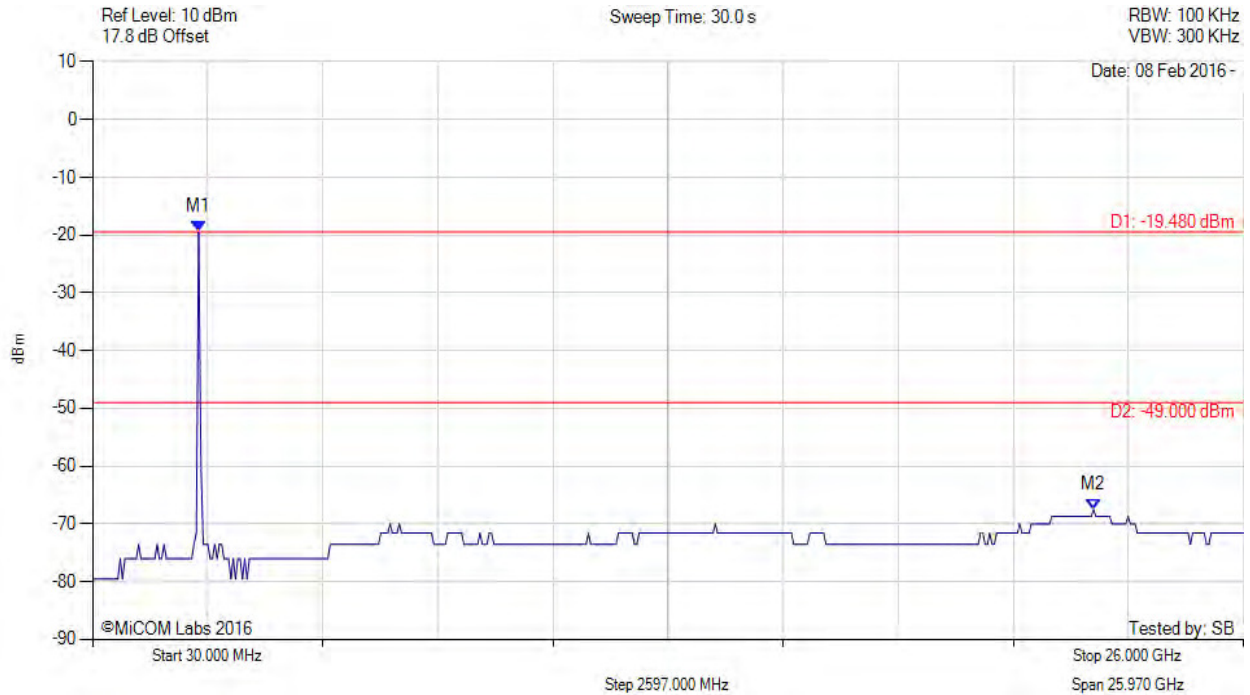

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -19.480 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -49.00 dBm Margin: -18.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 104 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2462.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

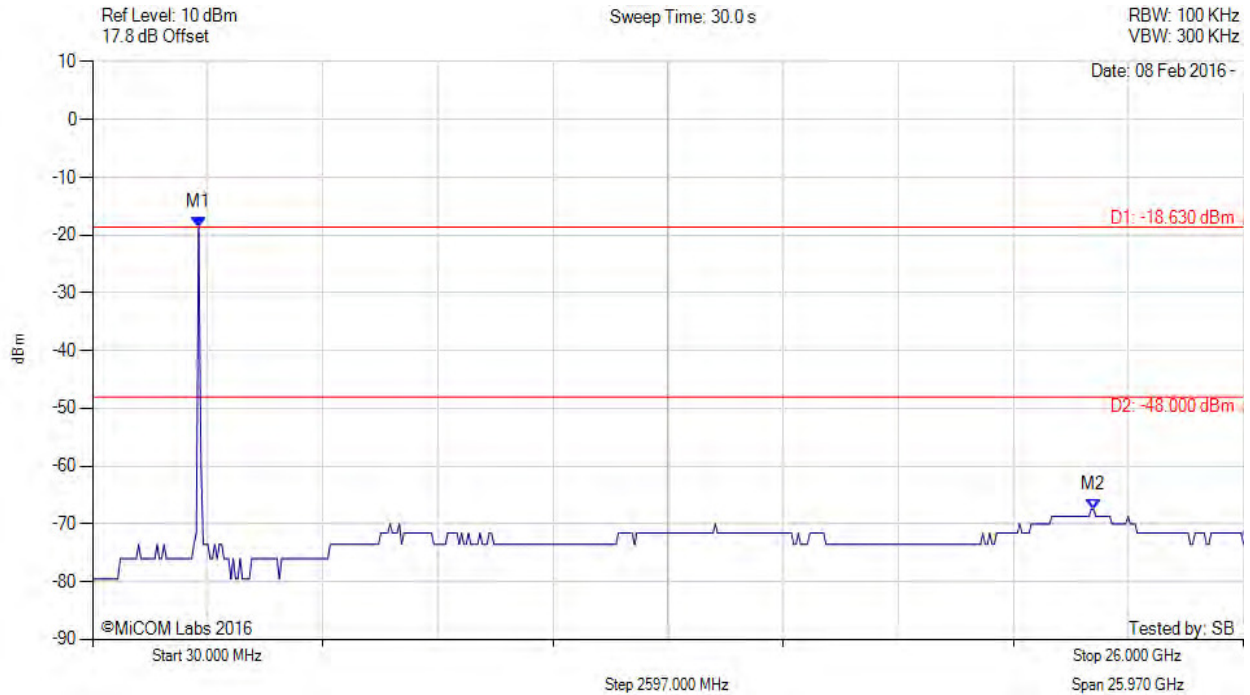

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -18.630 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -48.00 dBm Margin: -19.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 105 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2462.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

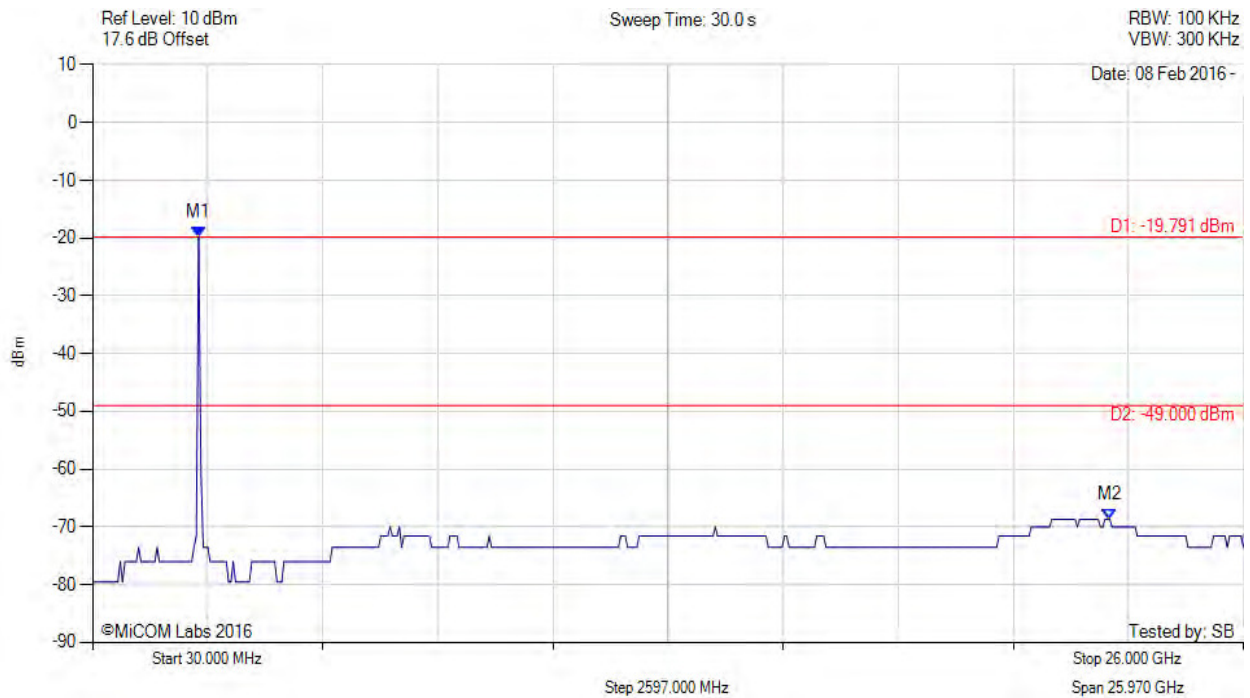

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -19.791 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -49.00 dBm Margin: -19.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 106 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

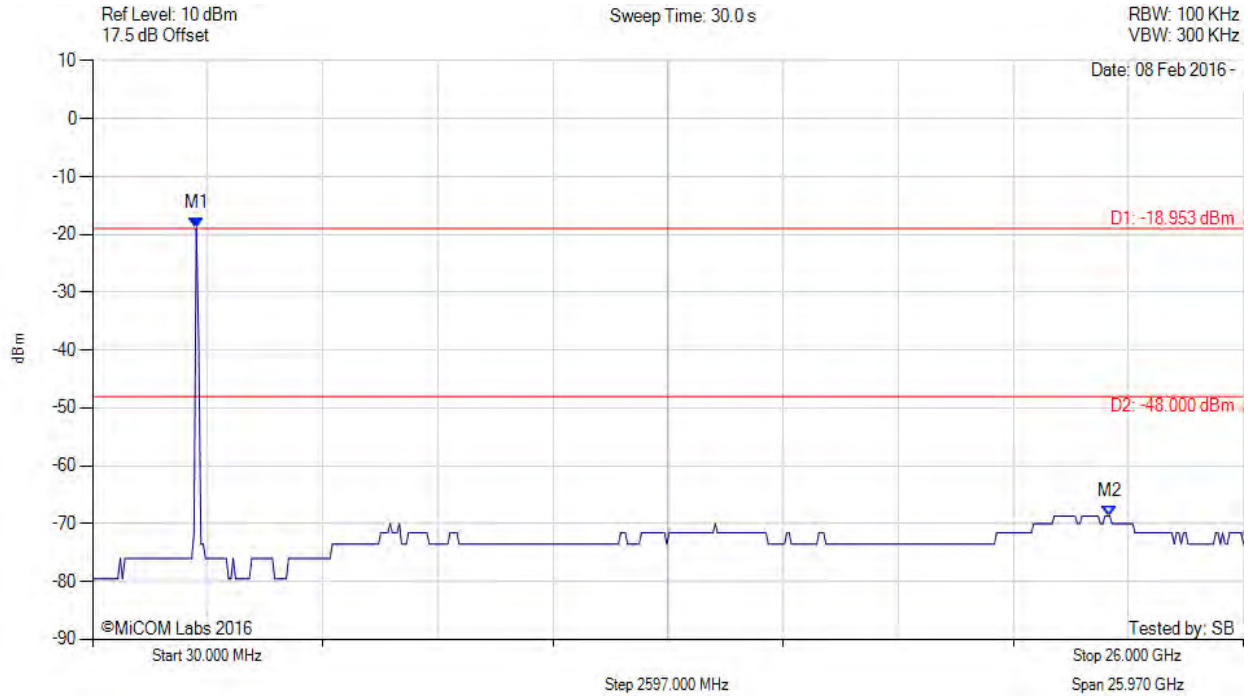

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2371.984 MHz : -18.953 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -48.00 dBm Margin: -20.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 107 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

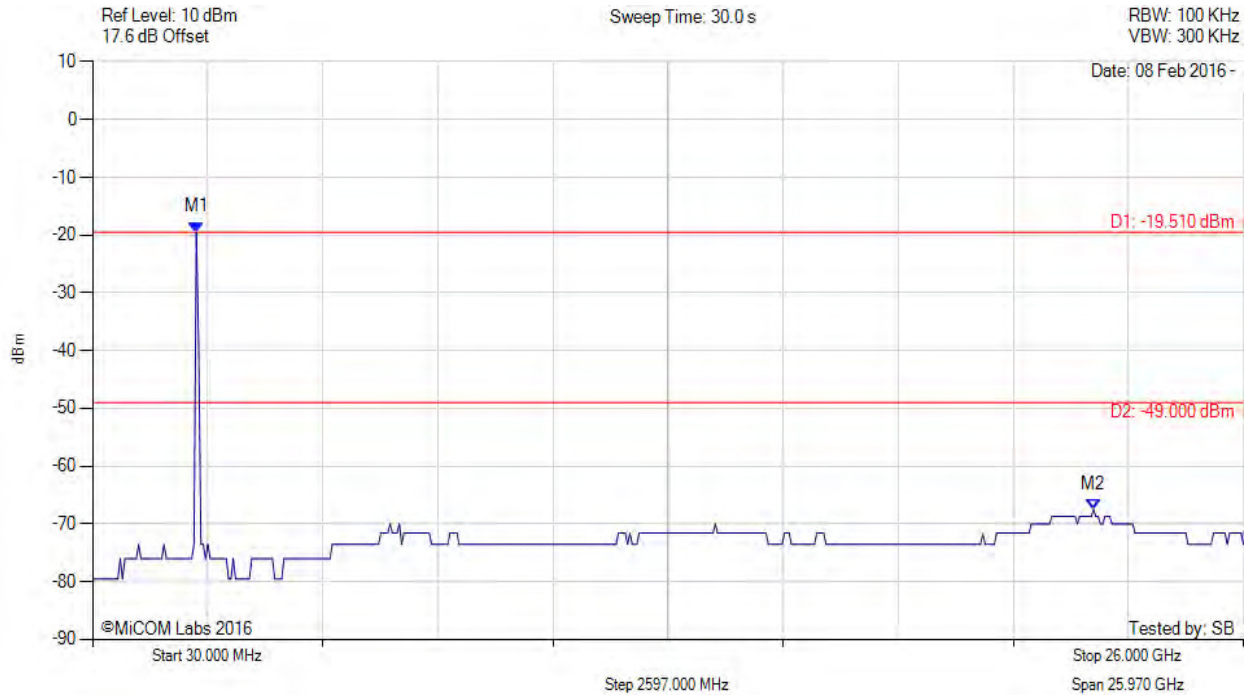

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2371.984 MHz : -19.510 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -49.00 dBm Margin: -18.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 108 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

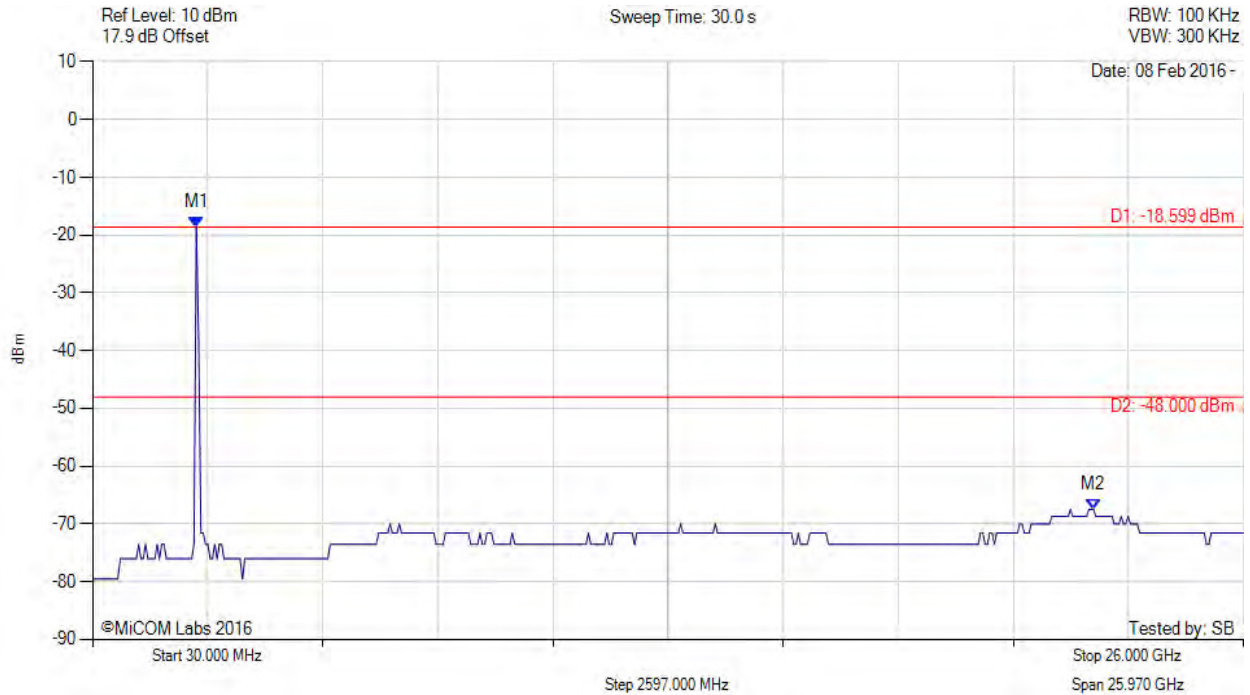

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2371.984 MHz : -18.599 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -48.00 dBm Margin: -19.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 109 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

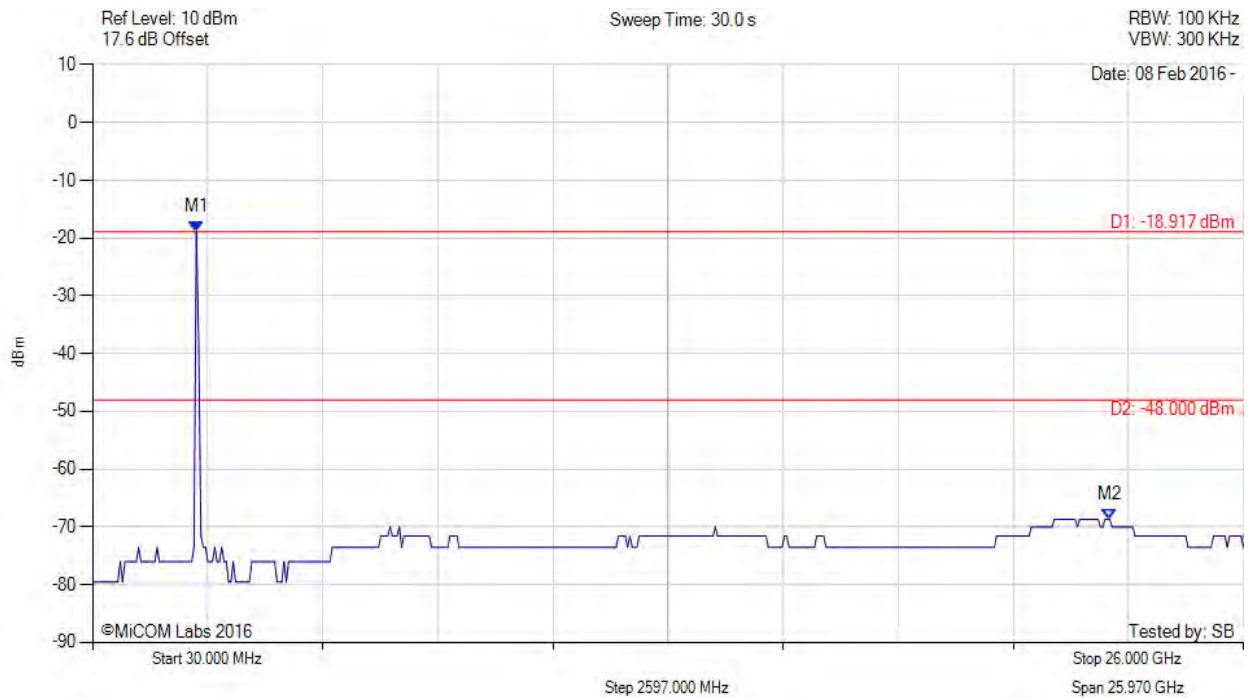

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2371.984 MHz : -18.917 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -48.00 dBm Margin: -20.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 110 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

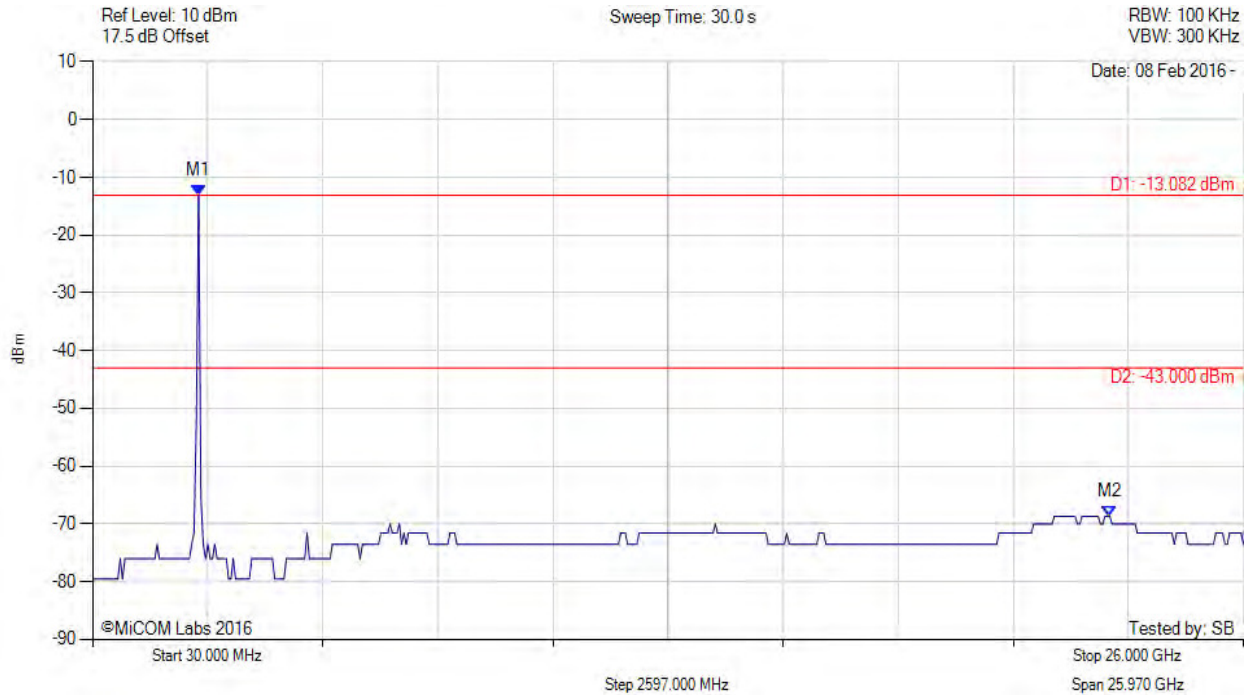

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -13.082 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -43.00 dBm Margin: -25.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 111 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

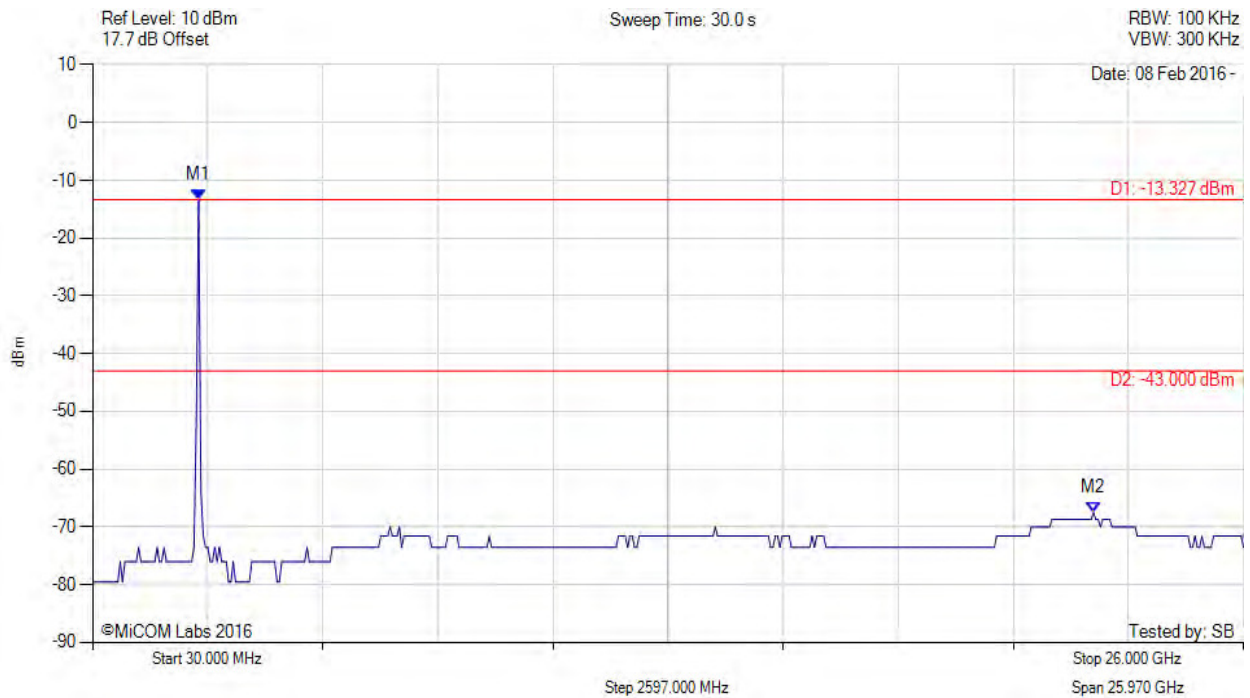

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -13.327 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -43.00 dBm Margin: -24.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 112 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

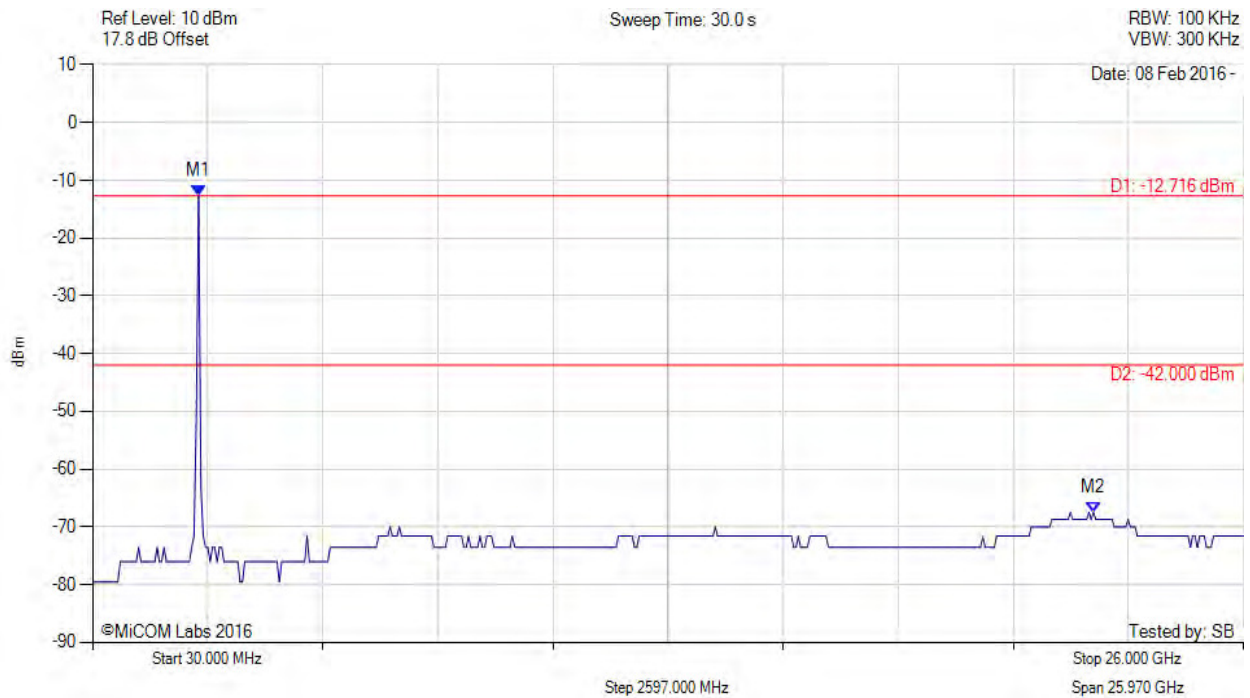

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -12.716 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -42.00 dBm Margin: -25.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 113 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

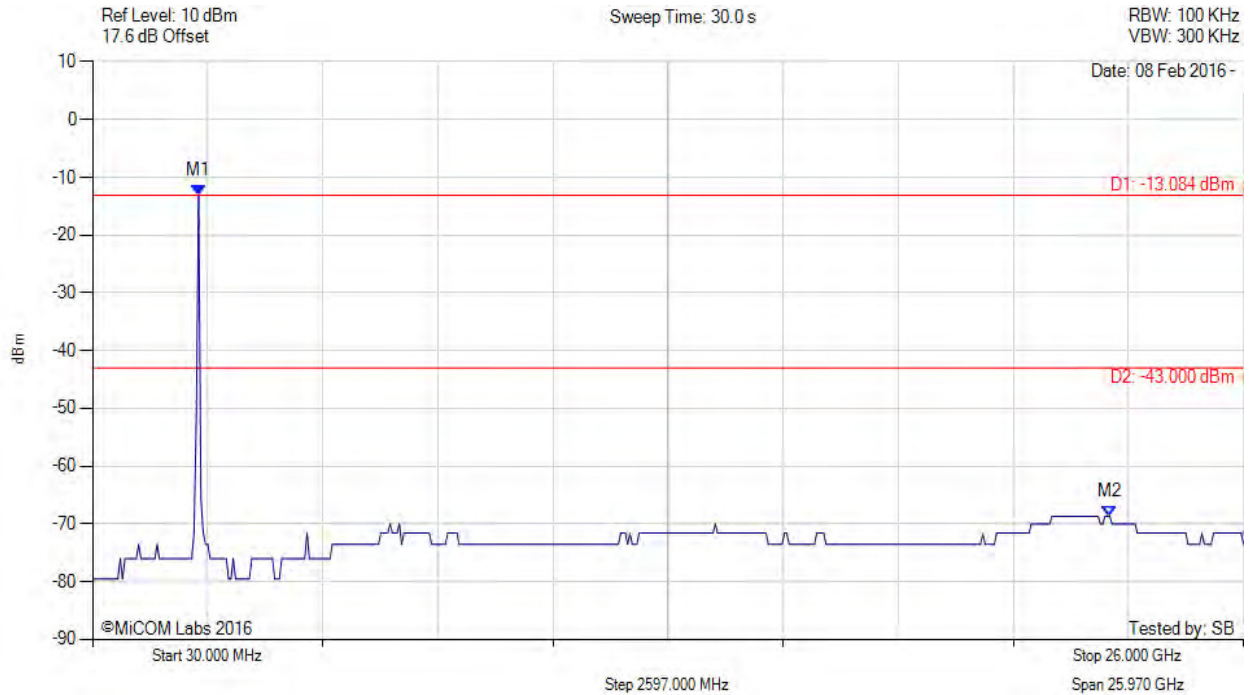

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -13.084 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -43.00 dBm Margin: -25.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 114 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

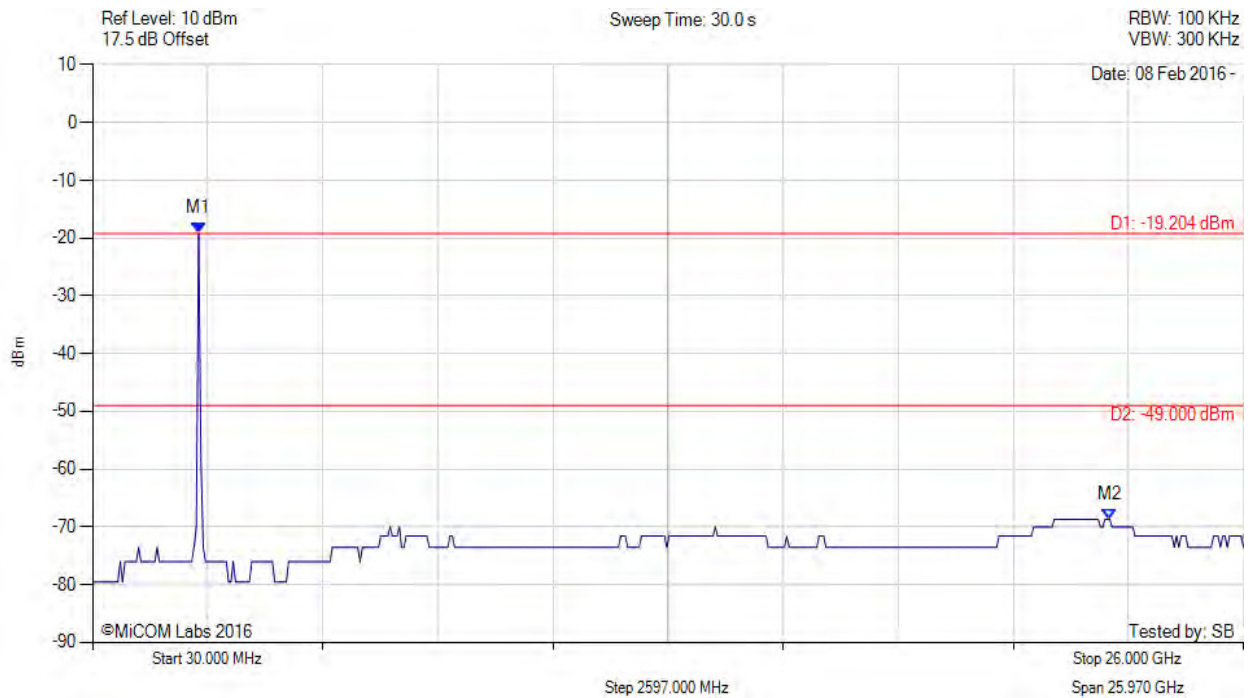

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -19.204 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -49.00 dBm Margin: -19.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 115 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

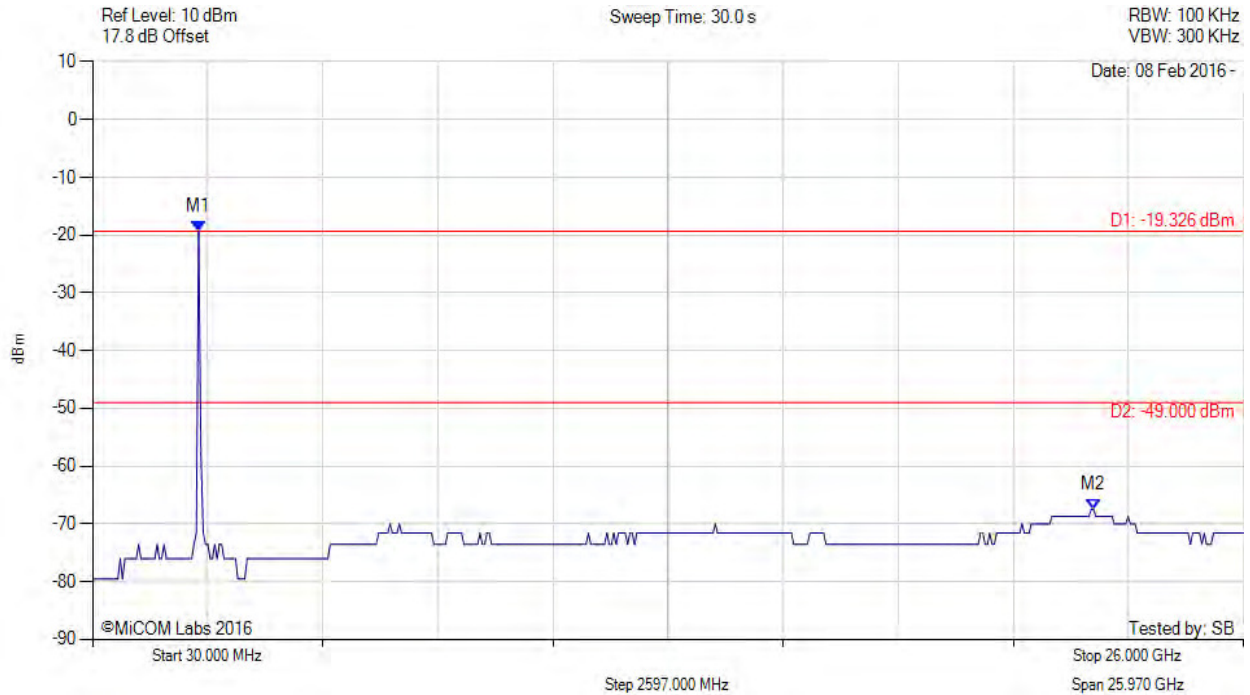

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -19.326 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -49.00 dBm Margin: -18.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 116 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

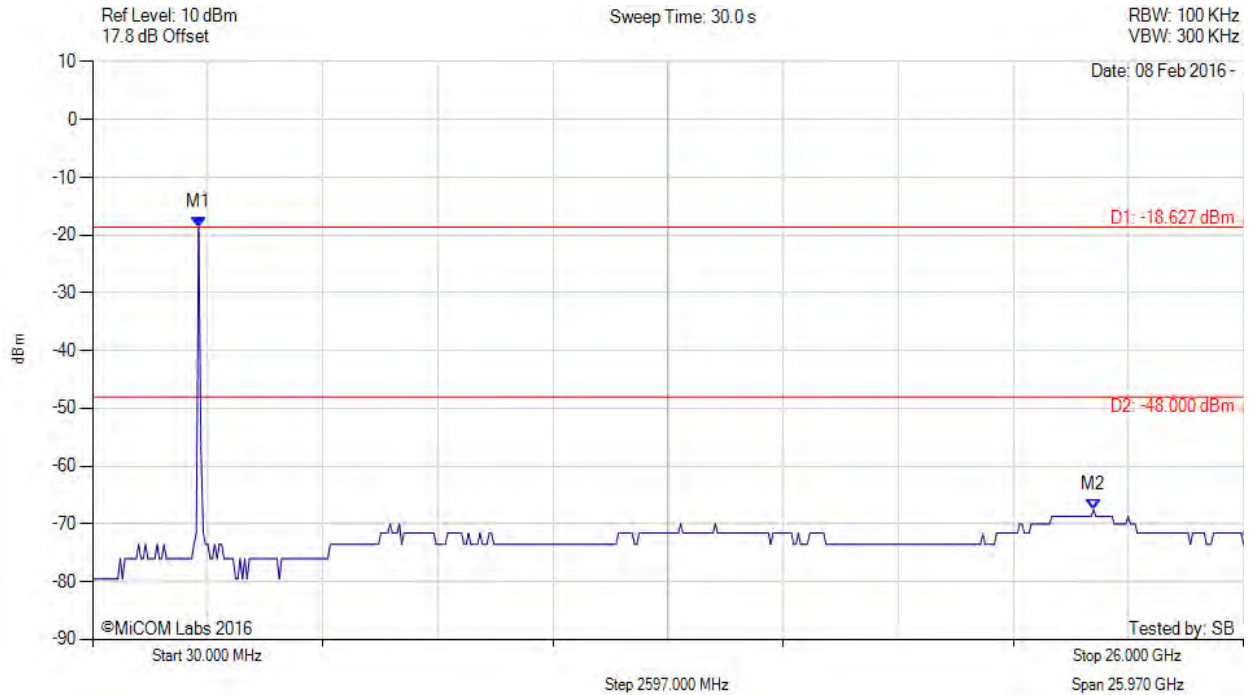

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -18.627 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -48.00 dBm Margin: -19.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 117 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

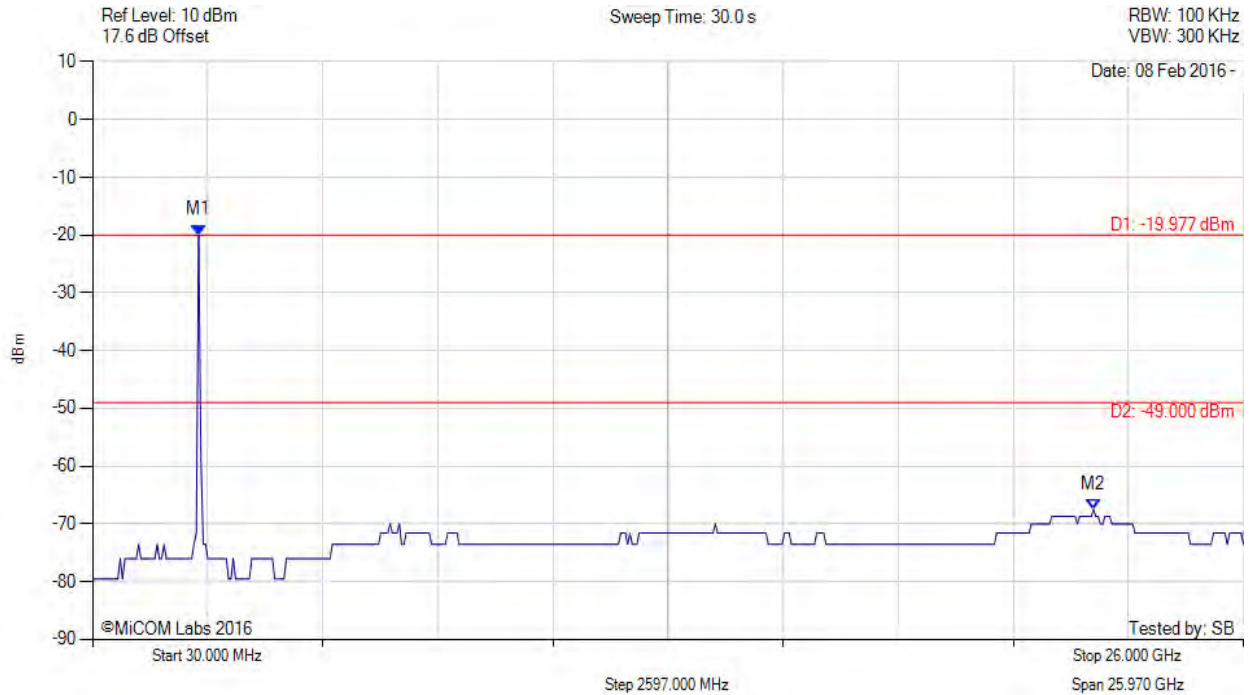

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -19.977 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -49.00 dBm Margin: -18.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 118 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

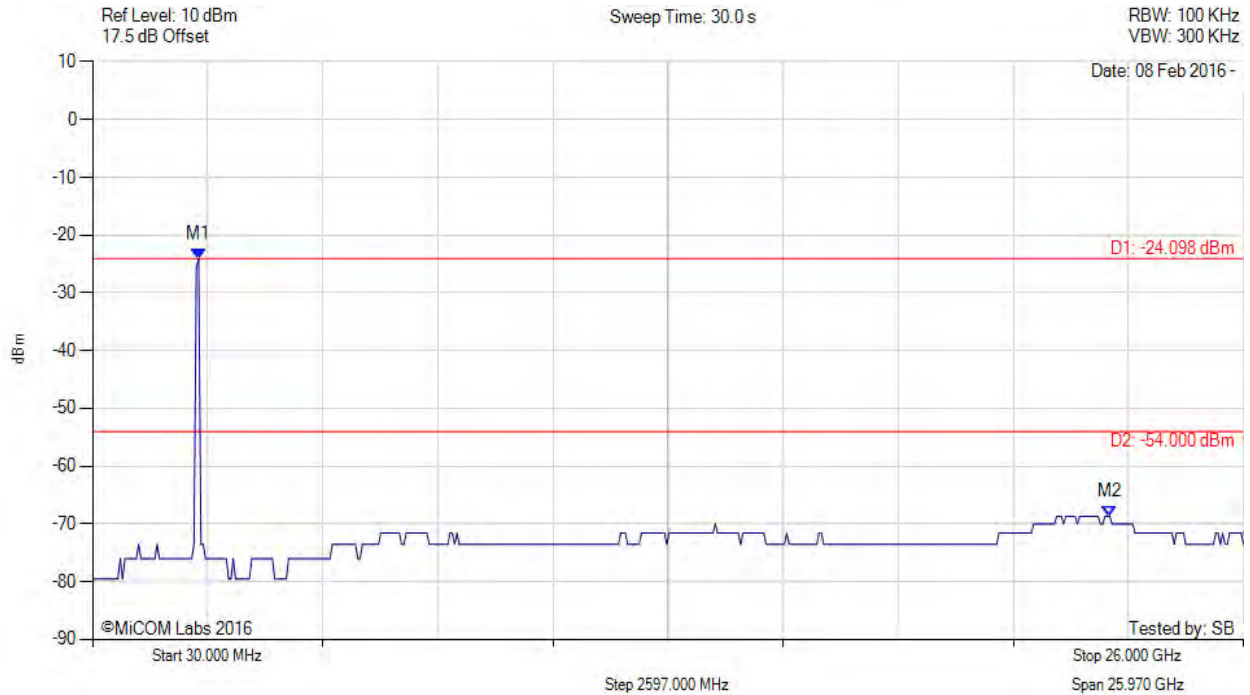

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -24.098 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -54.00 dBm Margin: -14.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 119 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

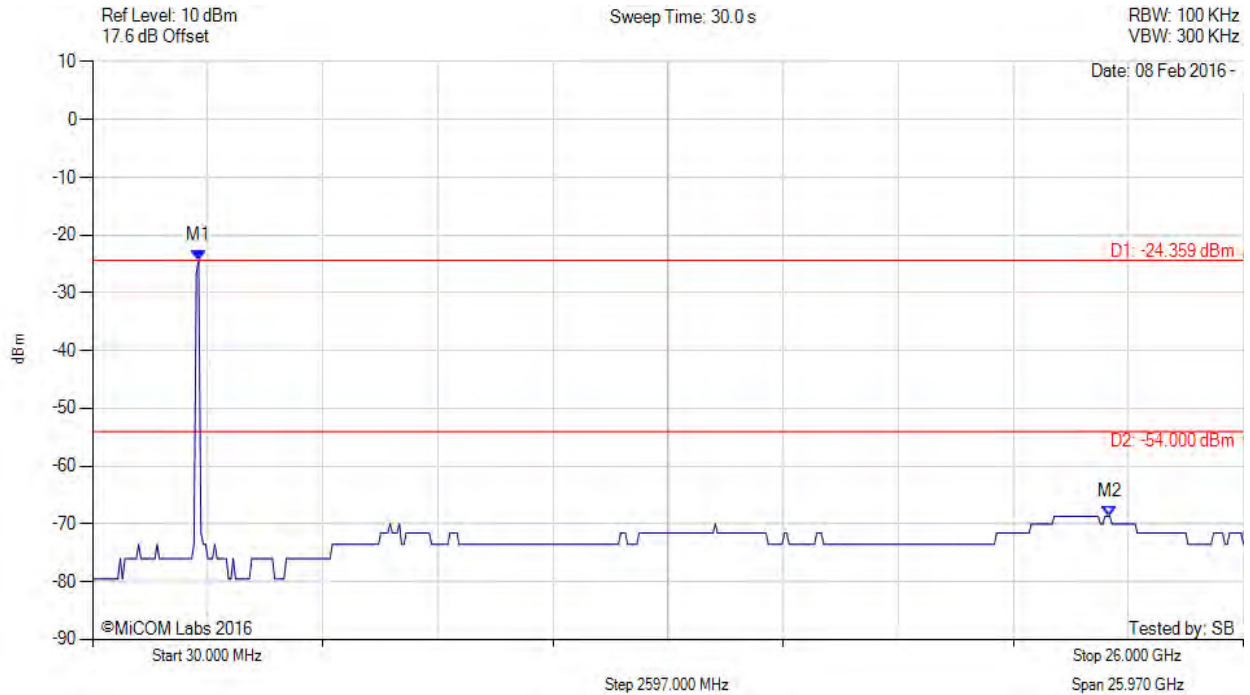

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -24.359 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -54.00 dBm Margin: -14.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 120 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

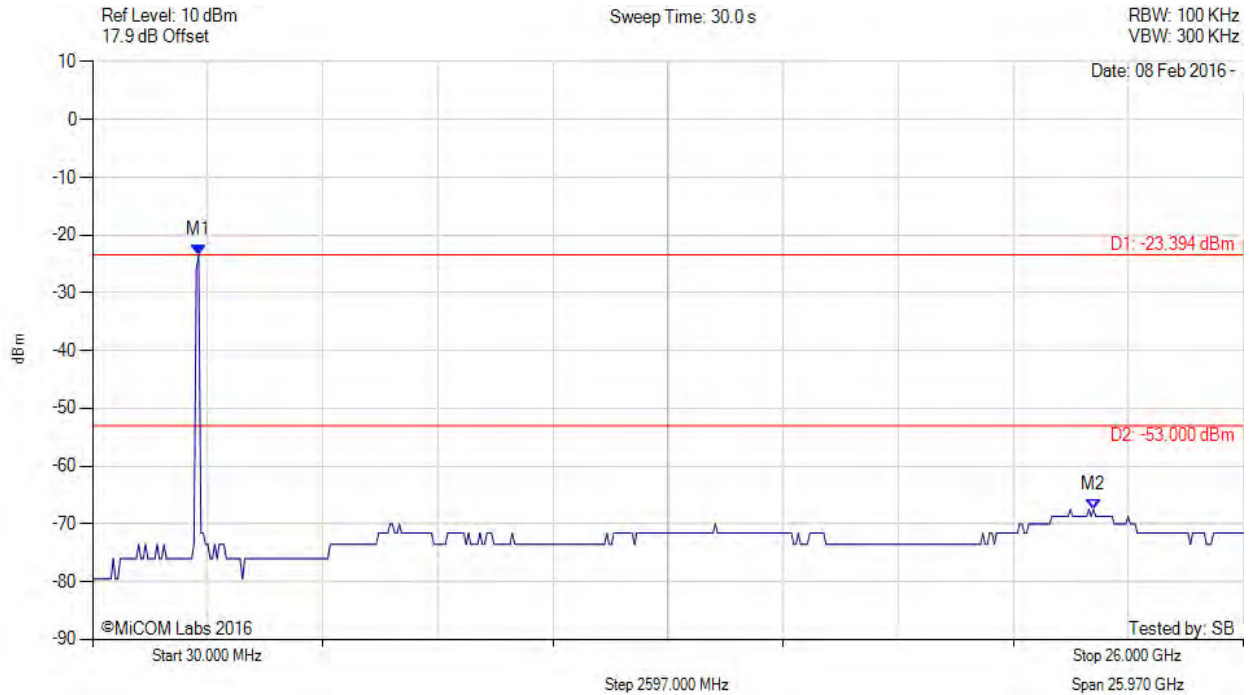

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -23.394 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -53.00 dBm Margin: -14.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 121 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

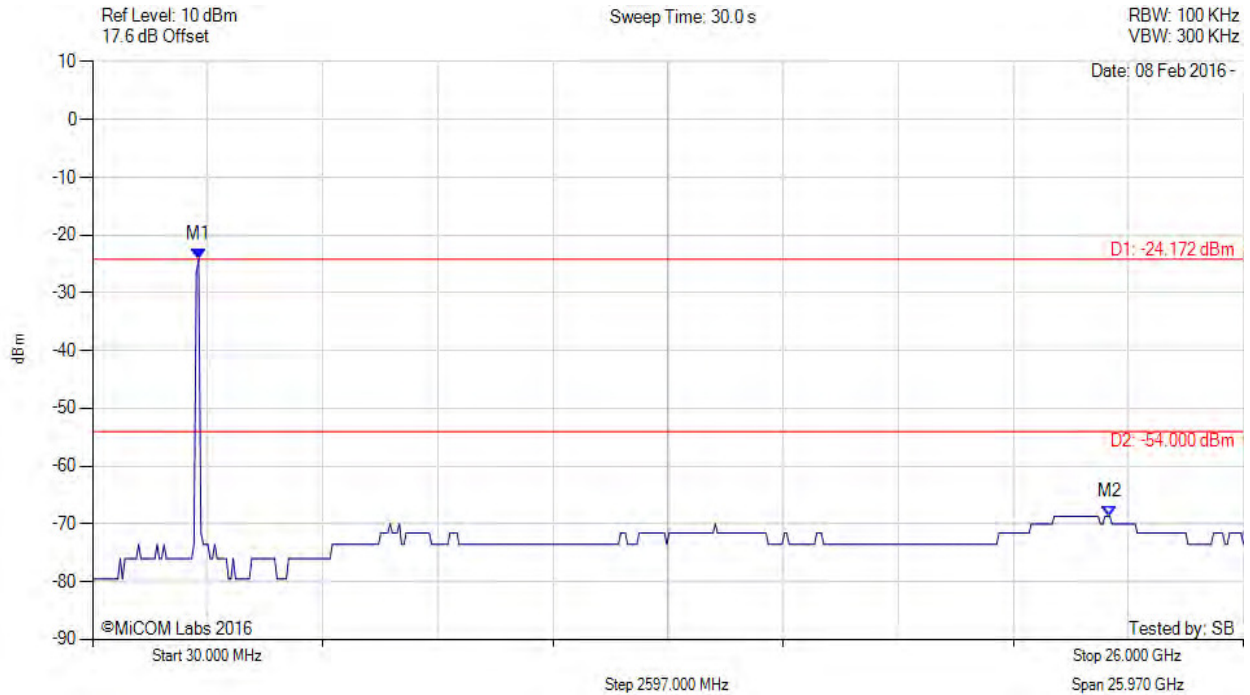

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -24.172 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -54.00 dBm Margin: -14.66 dB

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

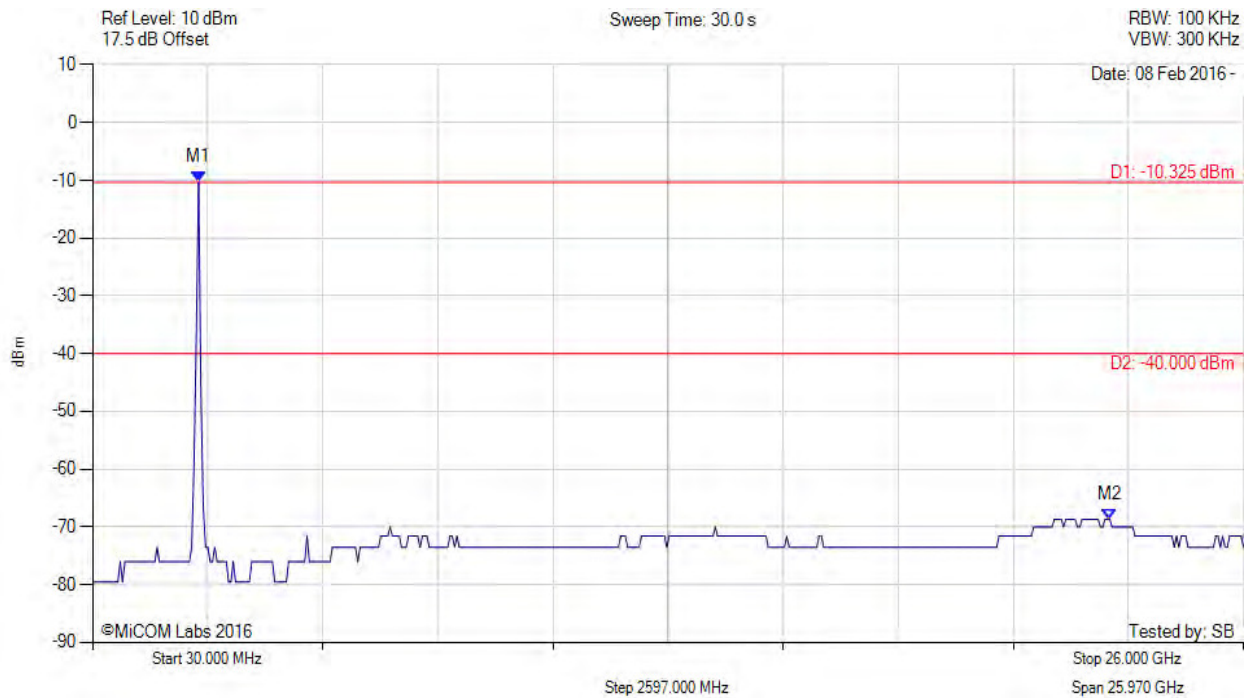

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -10.325 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -40.00 dBm Margin: -28.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 123 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

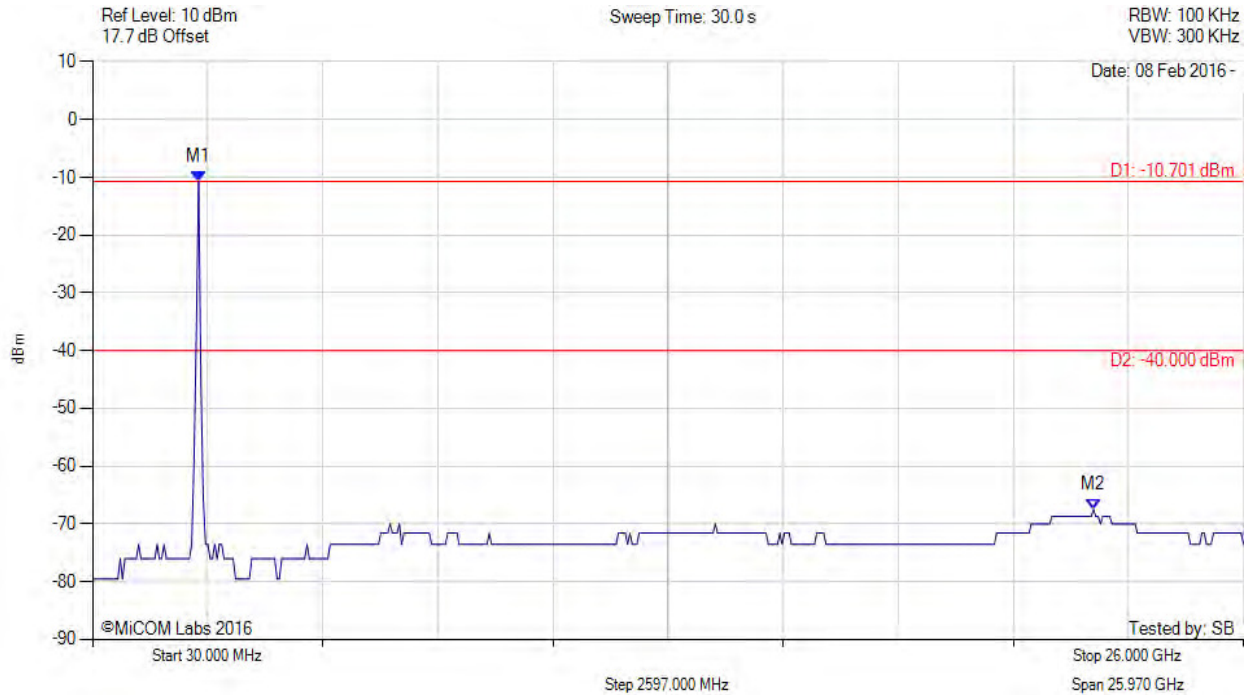

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -10.701 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -40.00 dBm Margin: -27.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 124 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

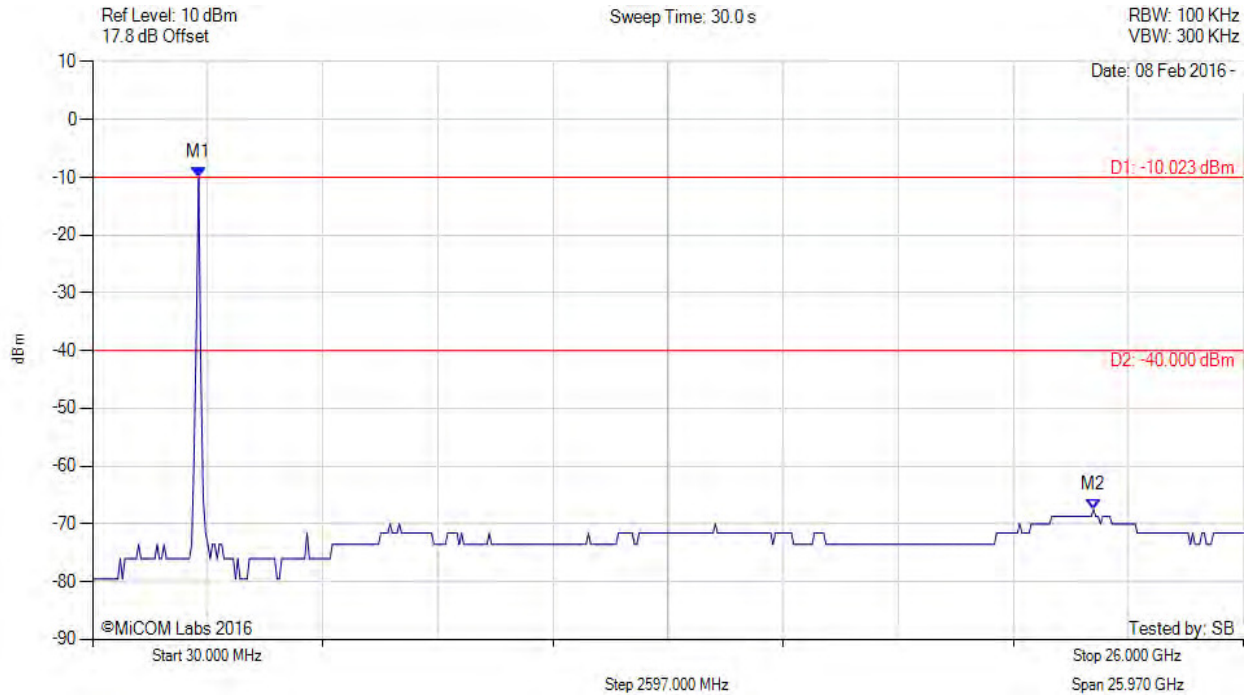

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -10.023 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -40.00 dBm Margin: -27.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 125 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

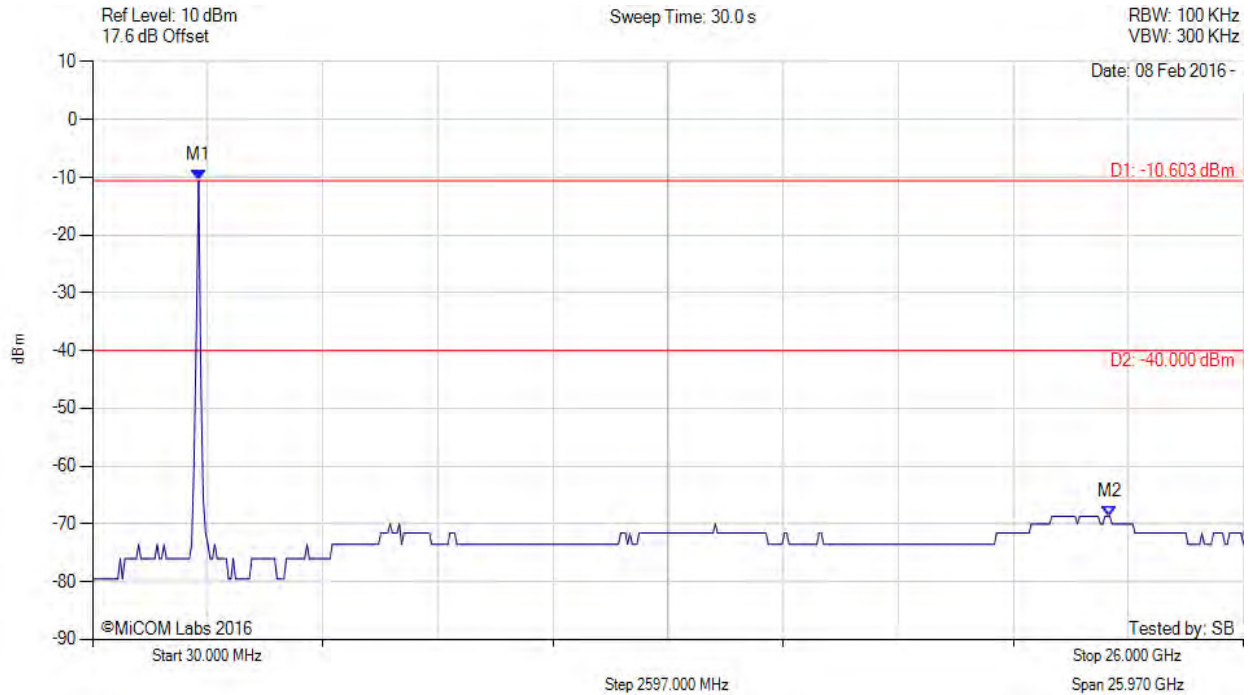

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -10.603 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -40.00 dBm Margin: -28.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 126 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

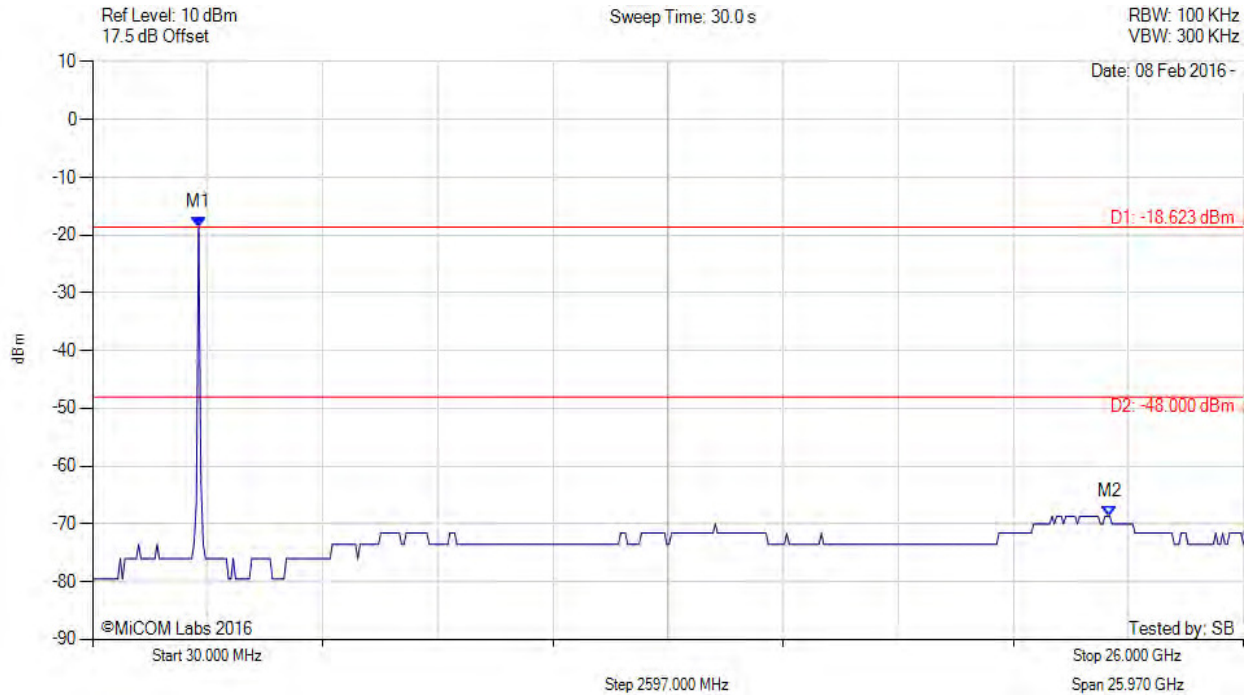

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -18.623 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -48.00 dBm Margin: -20.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 127 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

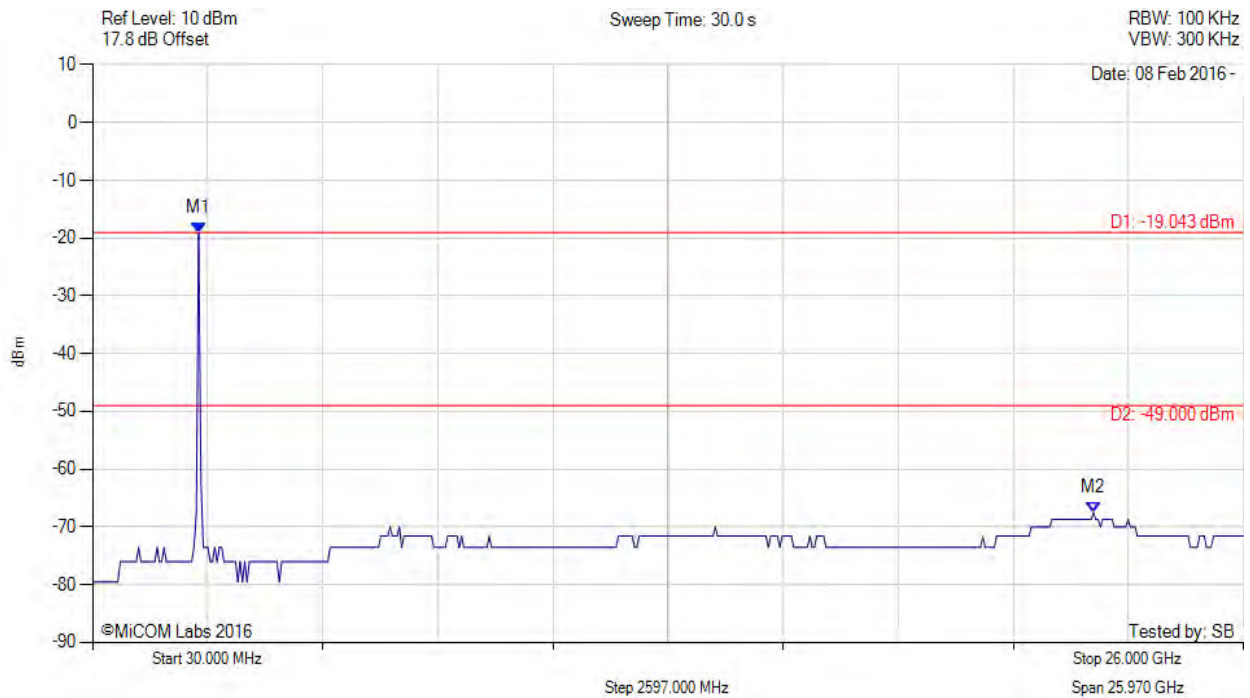

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -19.043 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -49.00 dBm Margin: -18.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 128 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

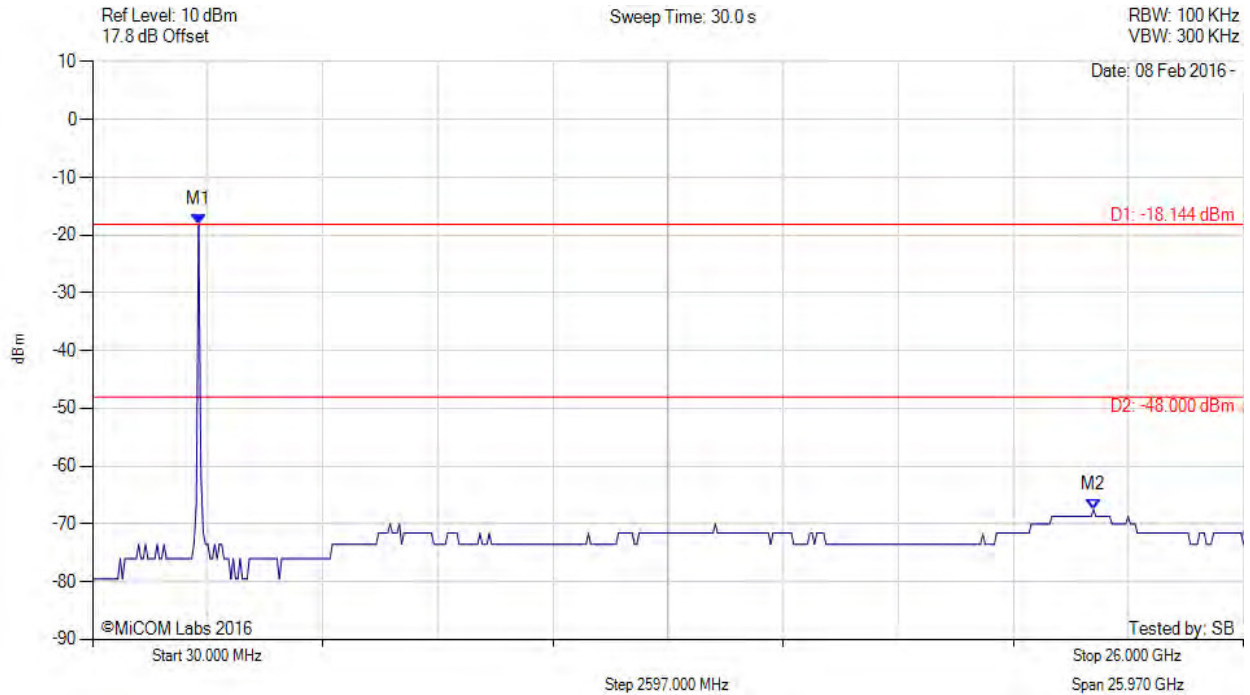

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -18.144 dBm M2 : 22.617 GHz : -67.504 dBm	Limit: -48.00 dBm Margin: -19.50 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 129 of 223

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

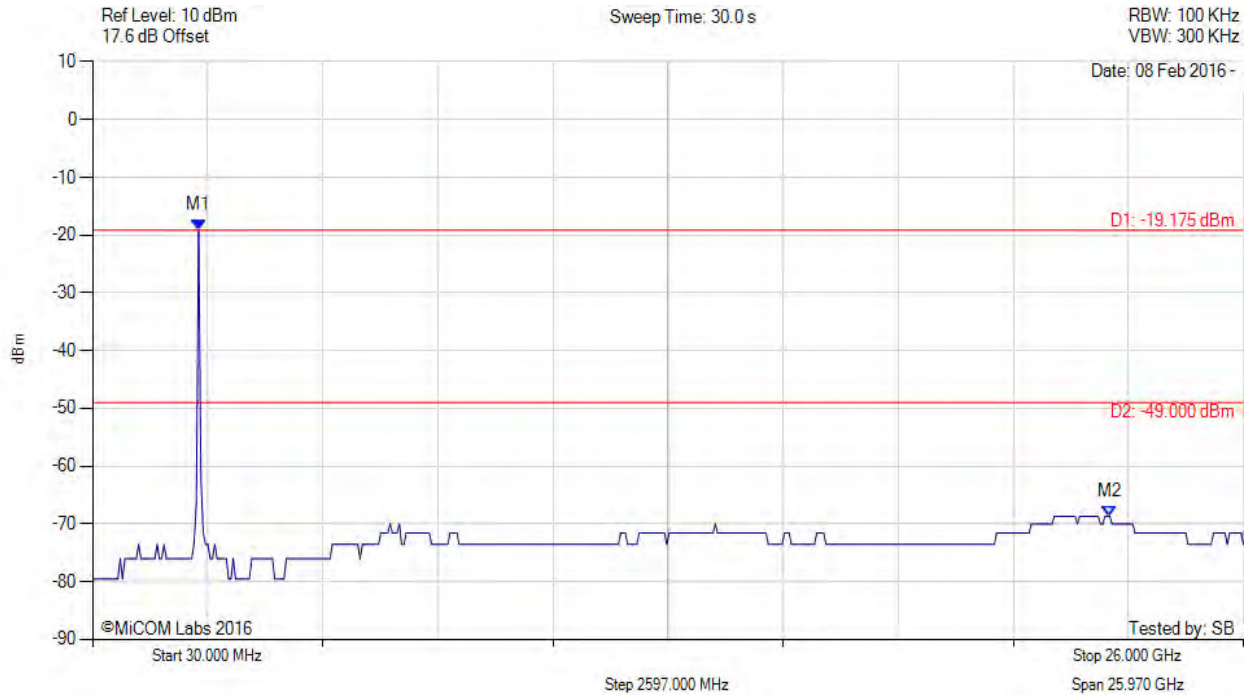

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2424.028 MHz : -19.175 dBm M2 : 22.981 GHz : -68.663 dBm	Limit: -49.00 dBm Margin: -19.66 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 130 of 223

### A.2.1.2. Conducted Band-Edge Emissions



#### CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE

Variant: 802.11b, Channel: 2412.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

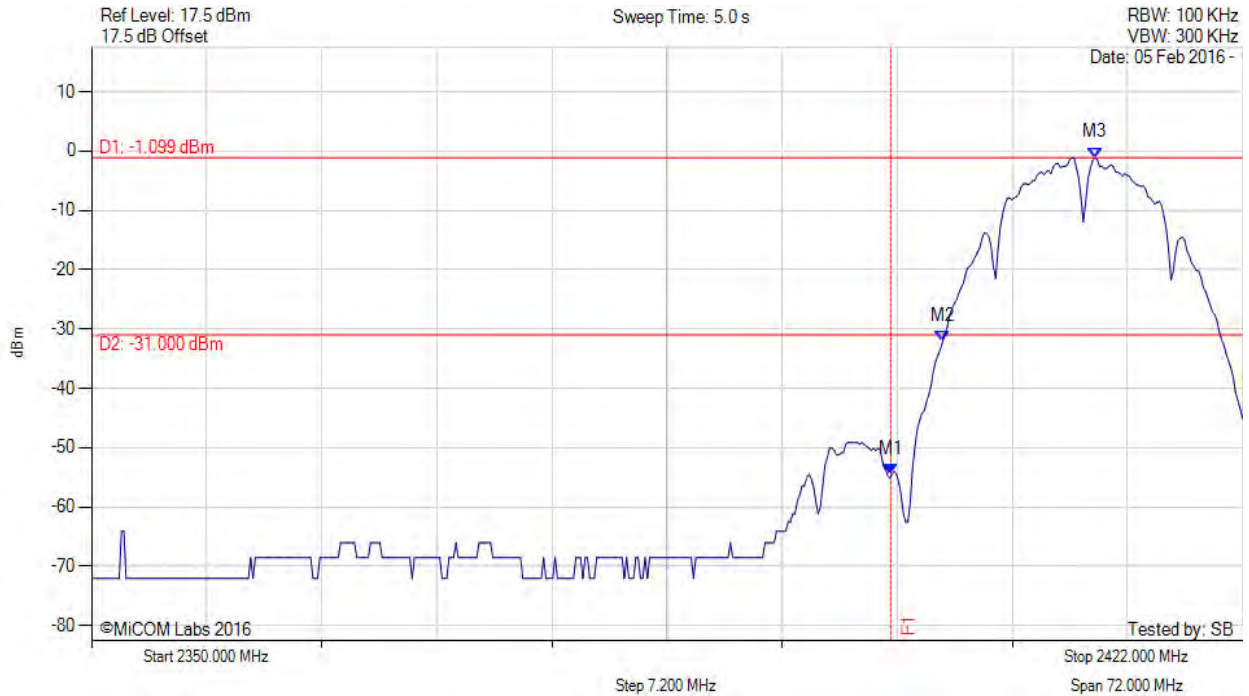

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2400.000 MHz : -54.544 dBm M2 : 2403.242 MHz : -32.088 dBm M3 : 2412.766 MHz : -1.099 dBm	Channel Frequency: 2412.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 131 of 223

CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

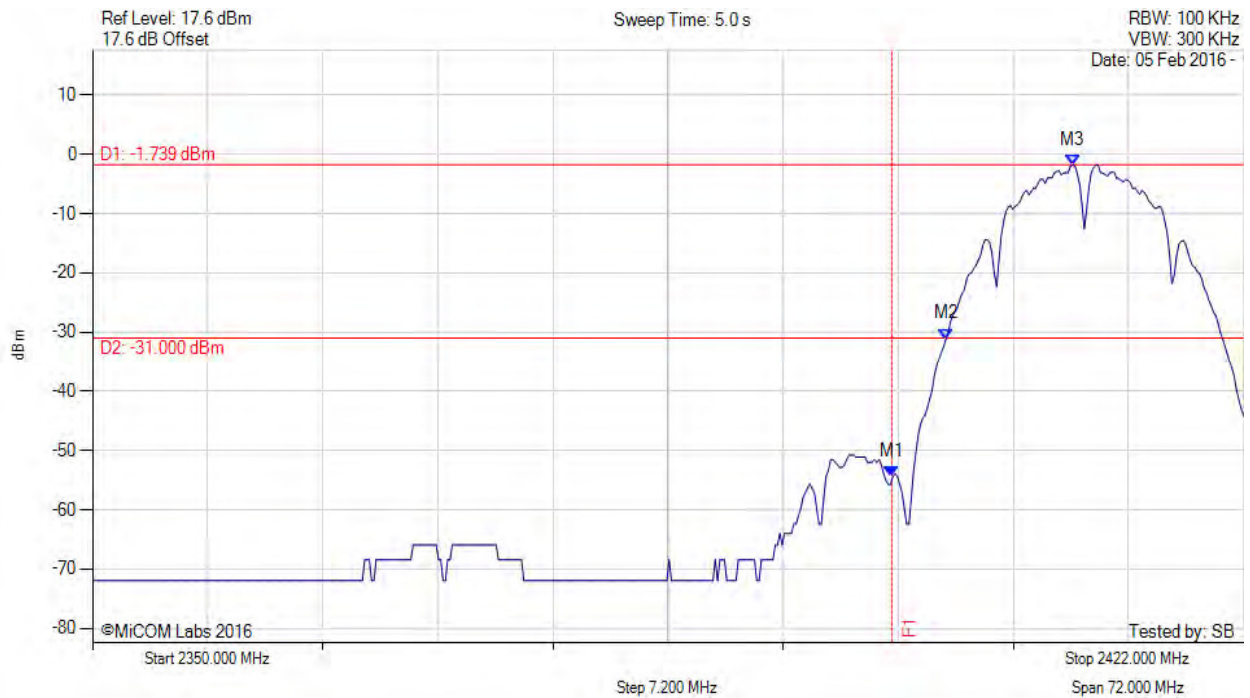

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2400.000 MHz : -54.444 dBm M2 : 2403.387 MHz : -31.156 dBm M3 : 2411.323 MHz : -1.739 dBm	Channel Frequency: 2412.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 132 of 223

CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2412.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

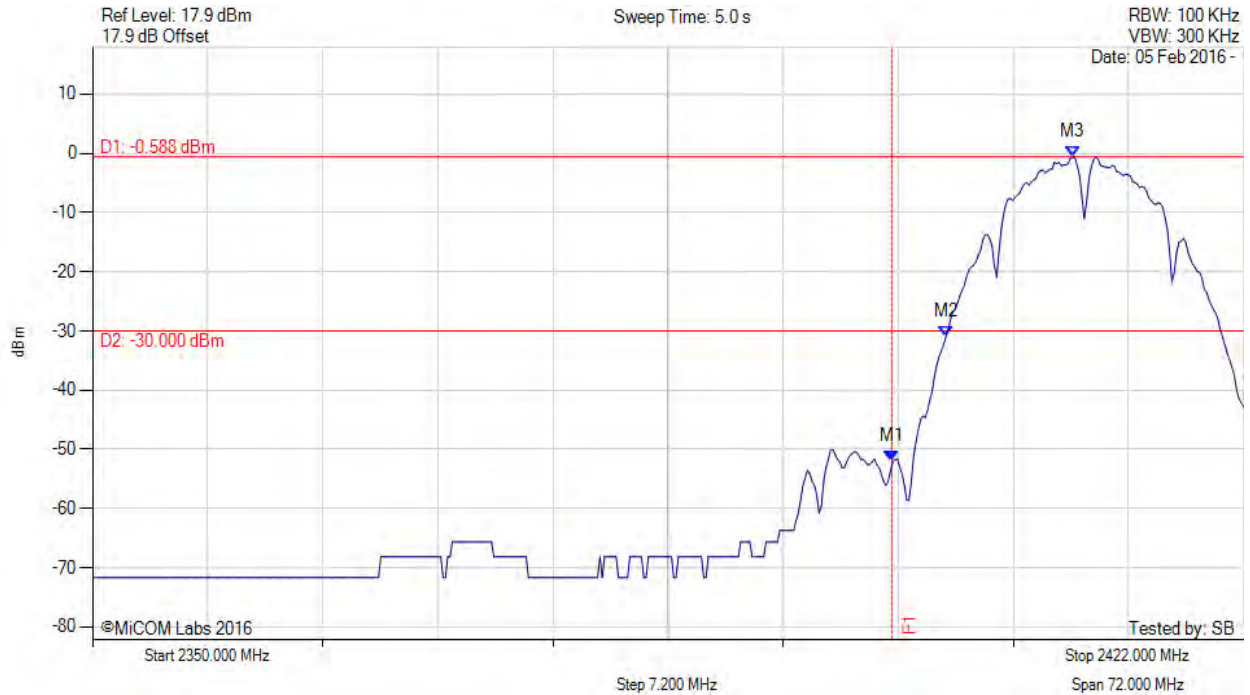

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2400.000 MHz : -52.090 dBm M2 : 2403.387 MHz : -30.936 dBm M3 : 2411.323 MHz : -0.588 dBm	Channel Frequency: 2412.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 133 of 223

CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2412.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

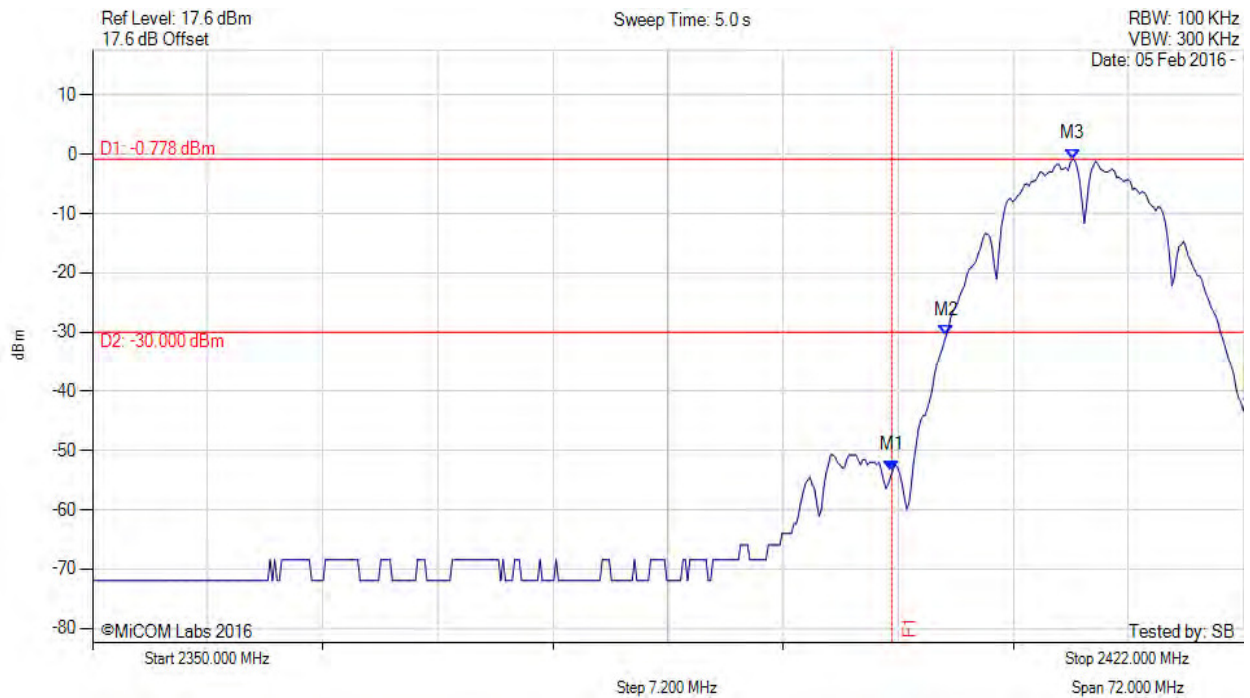

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2400.000 MHz : -53.356 dBm M2 : 2403.387 MHz : -30.618 dBm M3 : 2411.323 MHz : -0.778 dBm	Channel Frequency: 2412.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 134 of 223

CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2412.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

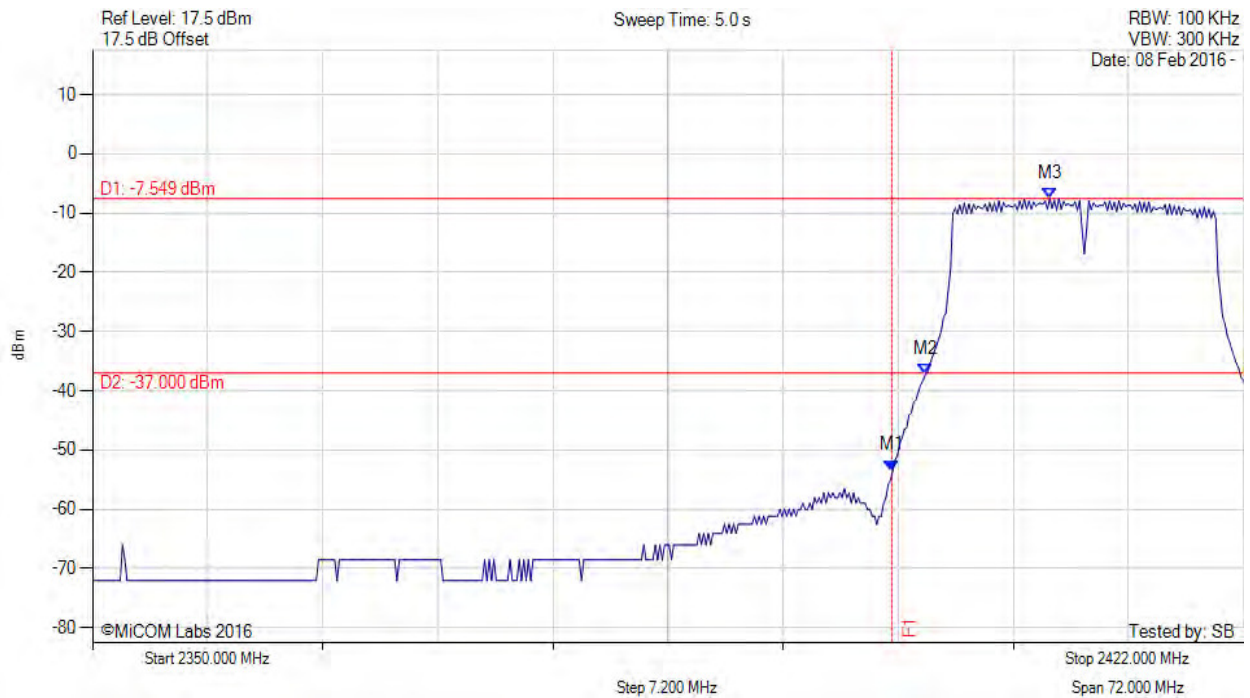

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2400.000 MHz : -53.456 dBm M2 : 2402.088 MHz : -37.317 dBm M3 : 2409.880 MHz : -7.549 dBm	Channel Frequency: 2412.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 135 of 223

CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

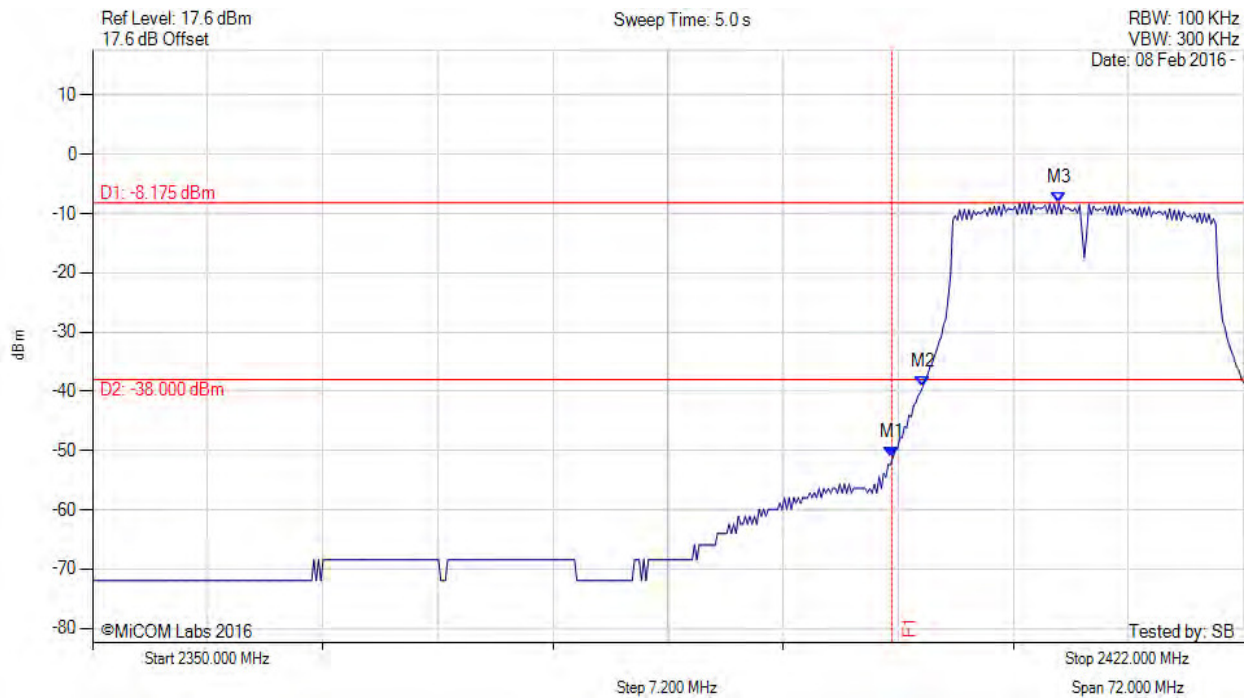

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2400.000 MHz : -51.117 dBm M2 : 2401.944 MHz : -39.175 dBm M3 : 2410.457 MHz : -8.175 dBm	Channel Frequency: 2412.00 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2412.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

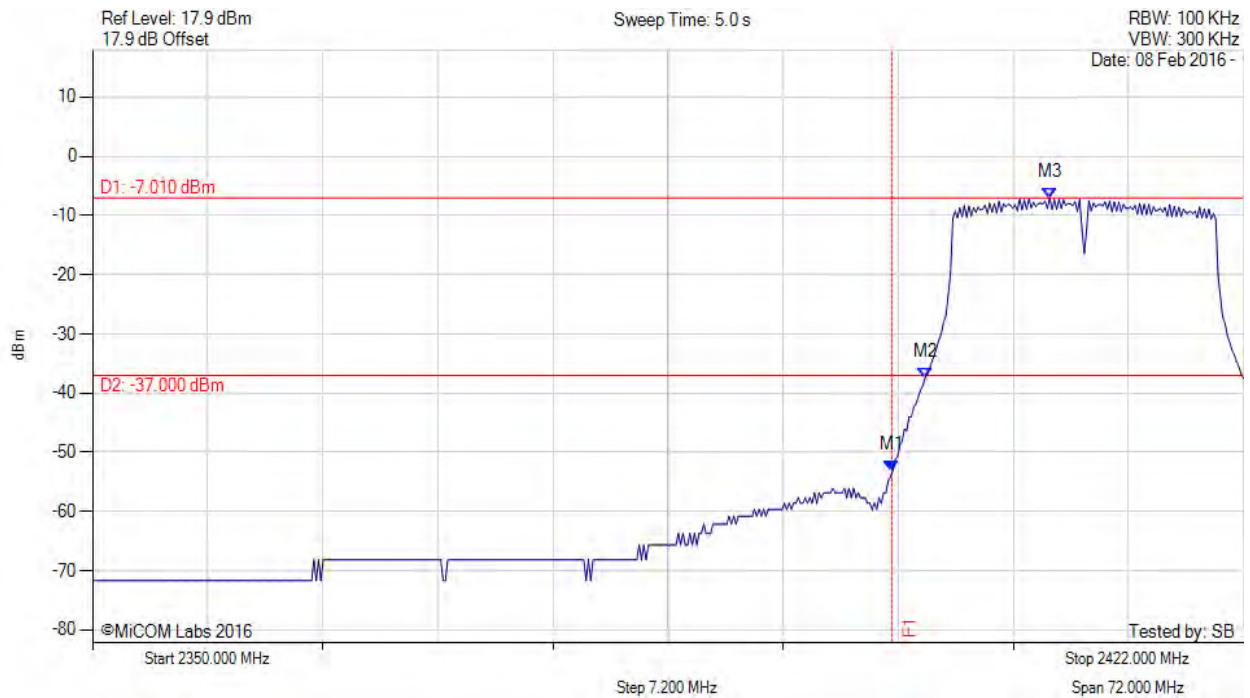

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2400.000 MHz : -53.056 dBm M2 : 2402.088 MHz : -37.409 dBm M3 : 2409.880 MHz : -7.010 dBm	Channel Frequency: 2412.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 137 of 223

CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2412.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

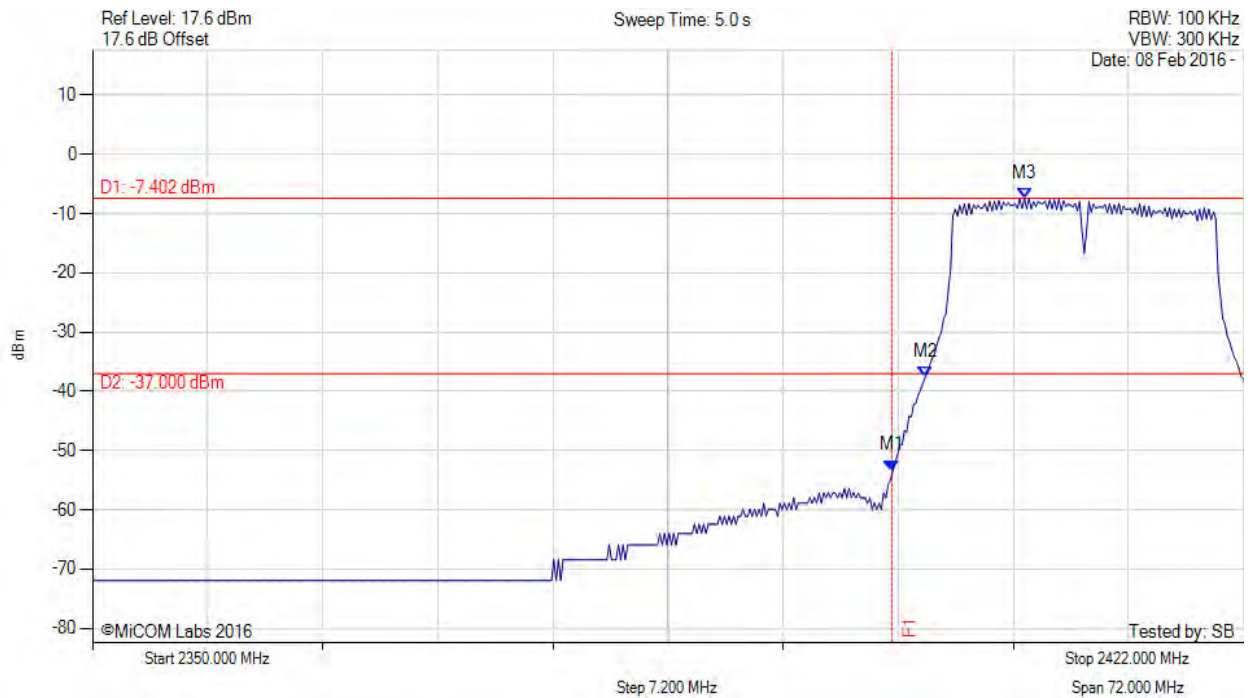

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2400.000 MHz : -53.356 dBm M2 : 2402.088 MHz : -37.542 dBm M3 : 2408.293 MHz : -7.402 dBm	Channel Frequency: 2412.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 138 of 223

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2462.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

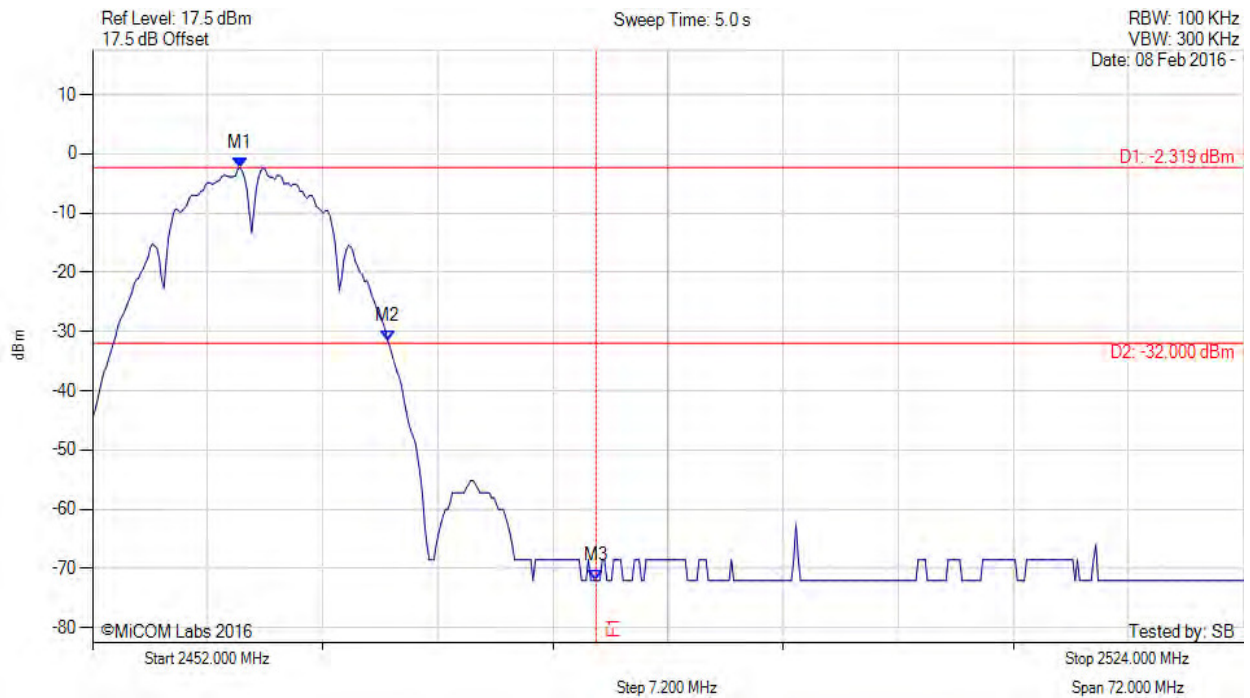

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2461.234 MHz : -2.319 dBm M2 : 2470.469 MHz : -31.580 dBm M3 : 2483.500 MHz : -72.045 dBm	Channel Frequency: 2462.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 139 of 223

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2462.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

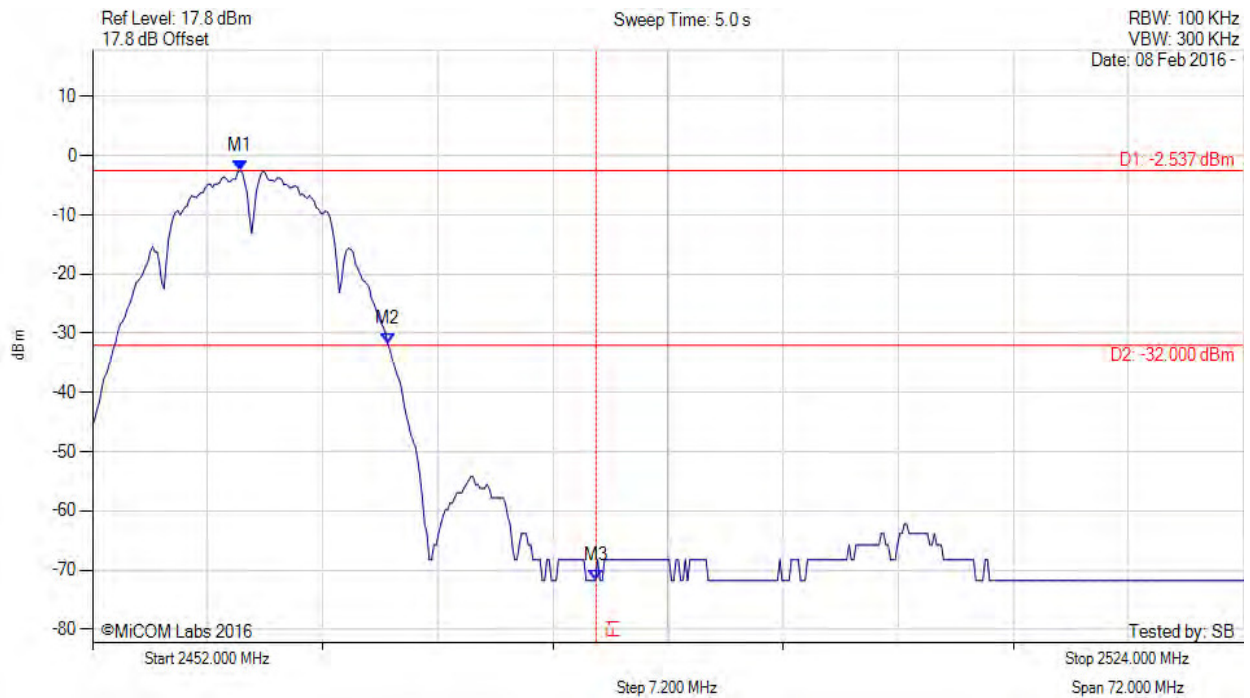

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2461.234 MHz : -2.537 dBm M2 : 2470.469 MHz : -31.832 dBm M3 : 2483.500 MHz : -71.745 dBm	Channel Frequency: 2462.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 140 of 223

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2462.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

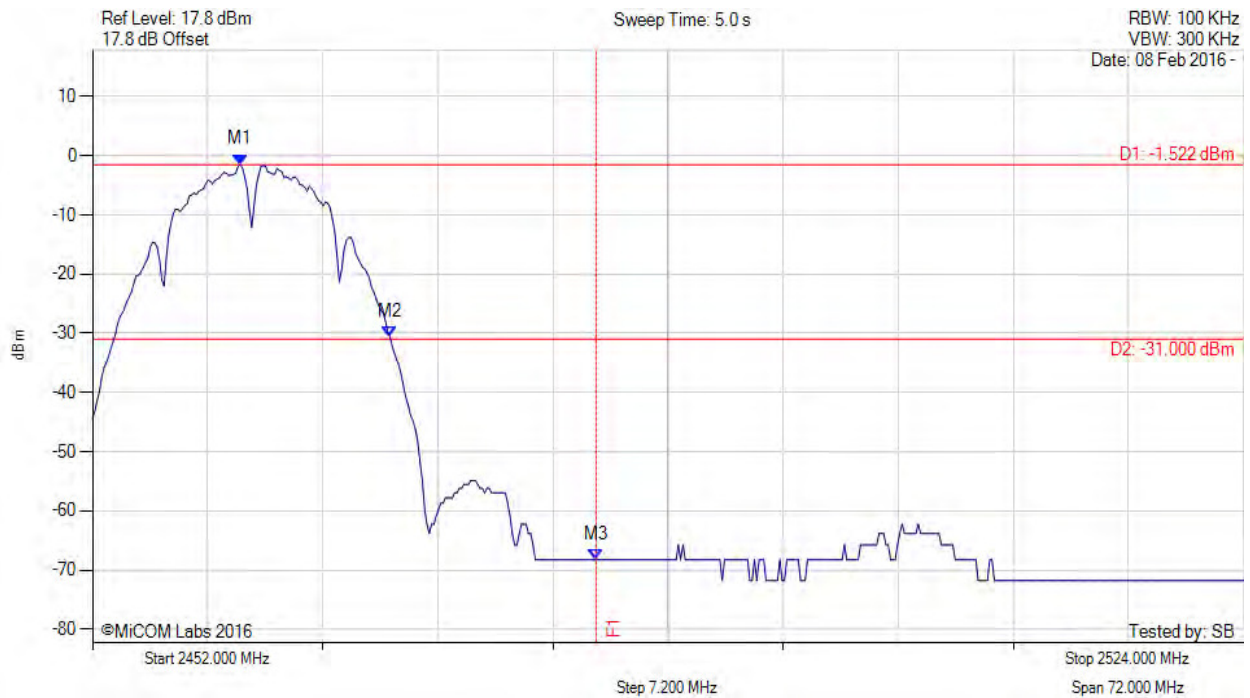

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2461.234 MHz : -1.522 dBm M2 : 2470.613 MHz : -30.645 dBm M3 : 2483.500 MHz : -68.223 dBm	Channel Frequency: 2462.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 141 of 223

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2462.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

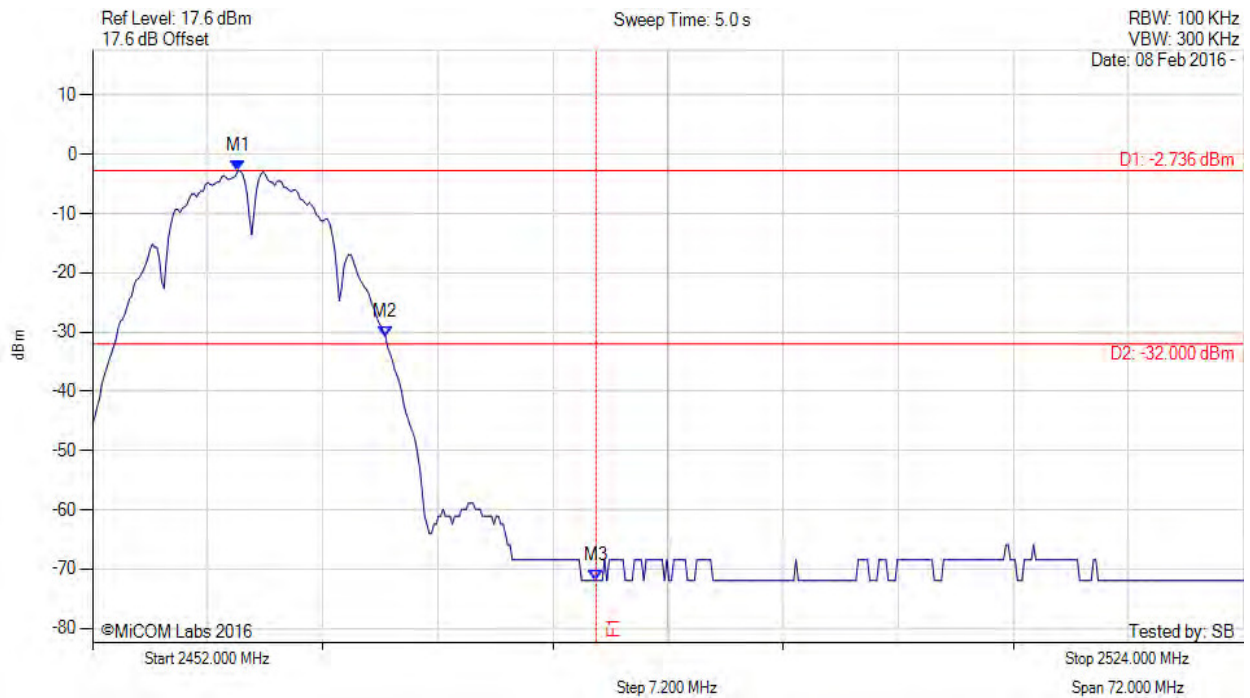

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2461.090 MHz : -2.736 dBm M2 : 2470.325 MHz : -30.731 dBm M3 : 2483.500 MHz : -71.945 dBm	Channel Frequency: 2462.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 142 of 223

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2462.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

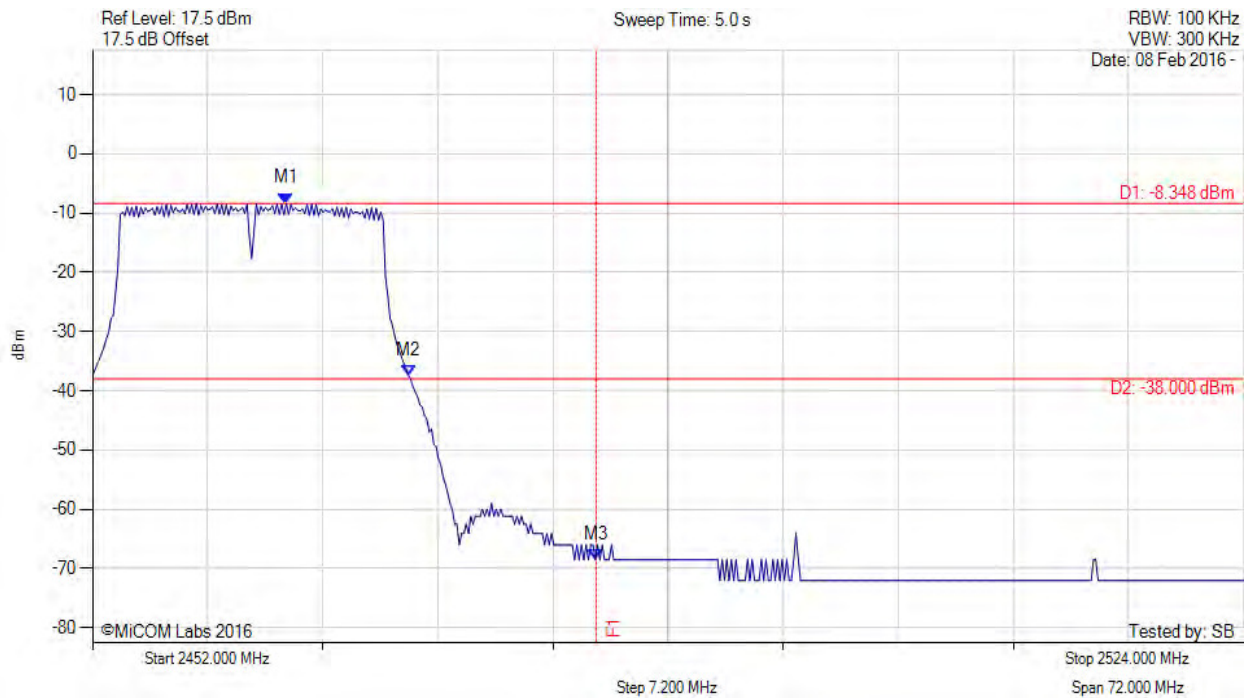

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2464.120 MHz : -8.348 dBm M2 : 2471.768 MHz : -37.478 dBm M3 : 2483.500 MHz : -68.523 dBm	Channel Frequency: 2462.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 143 of 223

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2462.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

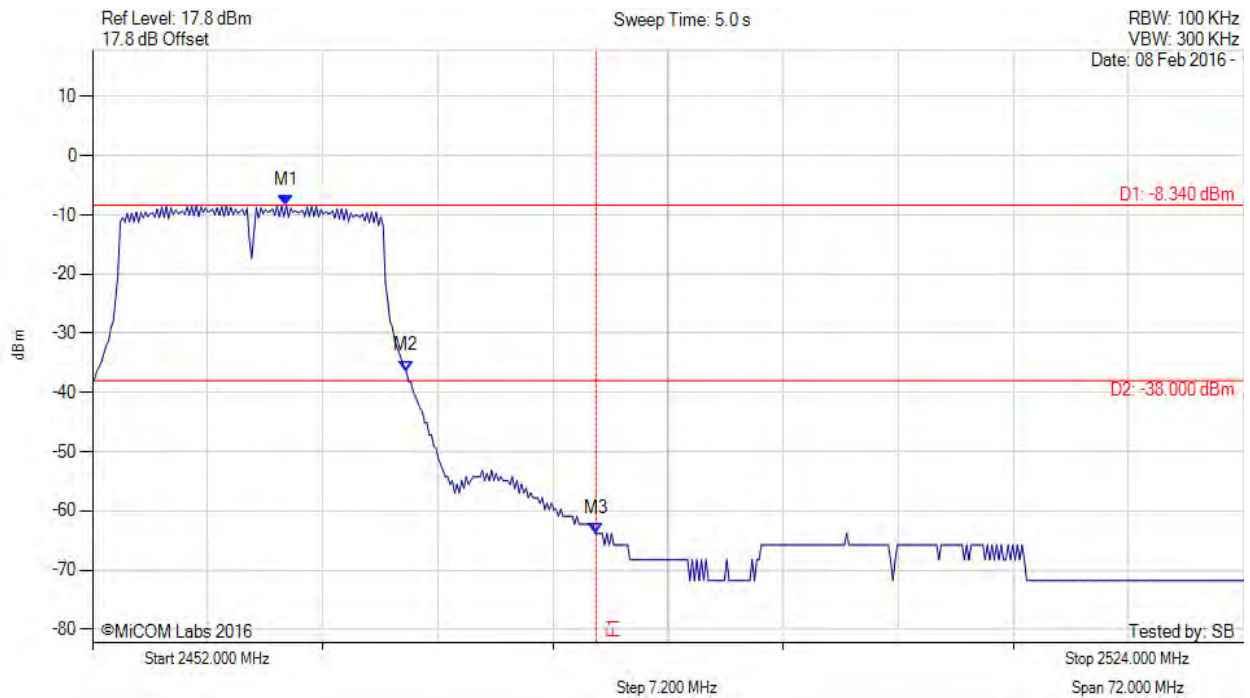

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2464.120 MHz : -8.340 dBm M2 : 2471.623 MHz : -36.328 dBm M3 : 2483.500 MHz : -63.786 dBm	Channel Frequency: 2462.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 144 of 223

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2462.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

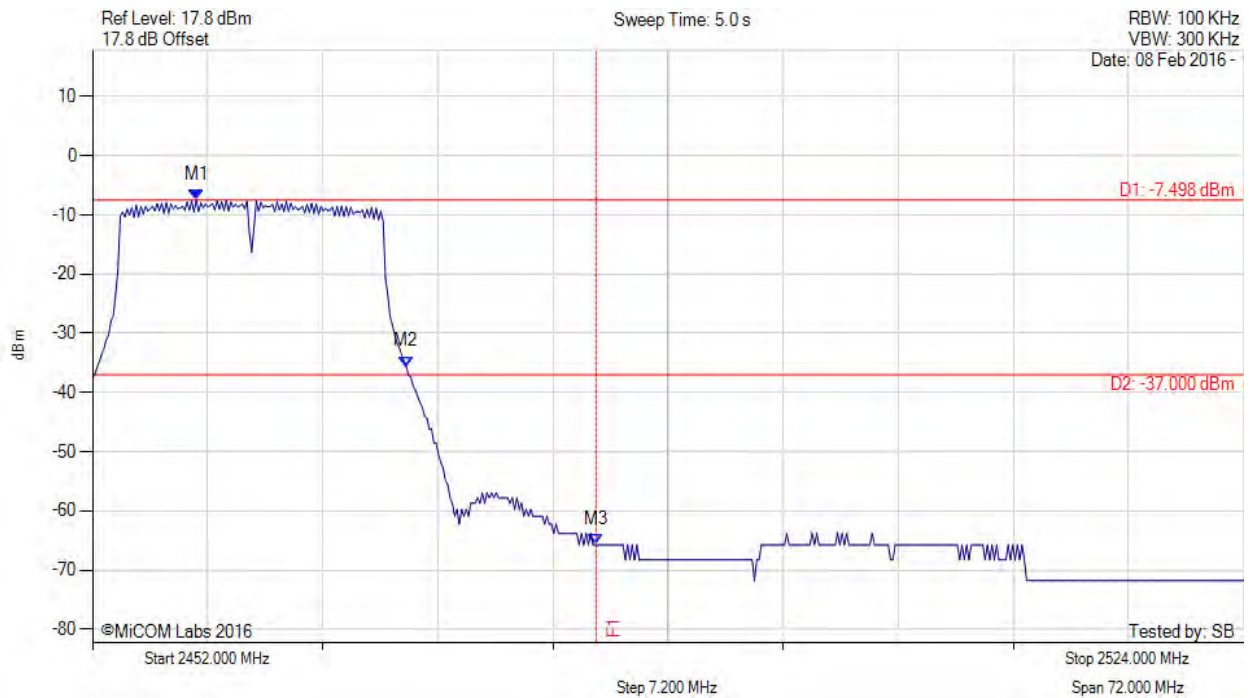

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2458.493 MHz : -7.498 dBm M2 : 2471.623 MHz : -35.621 dBm M3 : 2483.500 MHz : -65.724 dBm	Channel Frequency: 2462.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 145 of 223

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2462.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

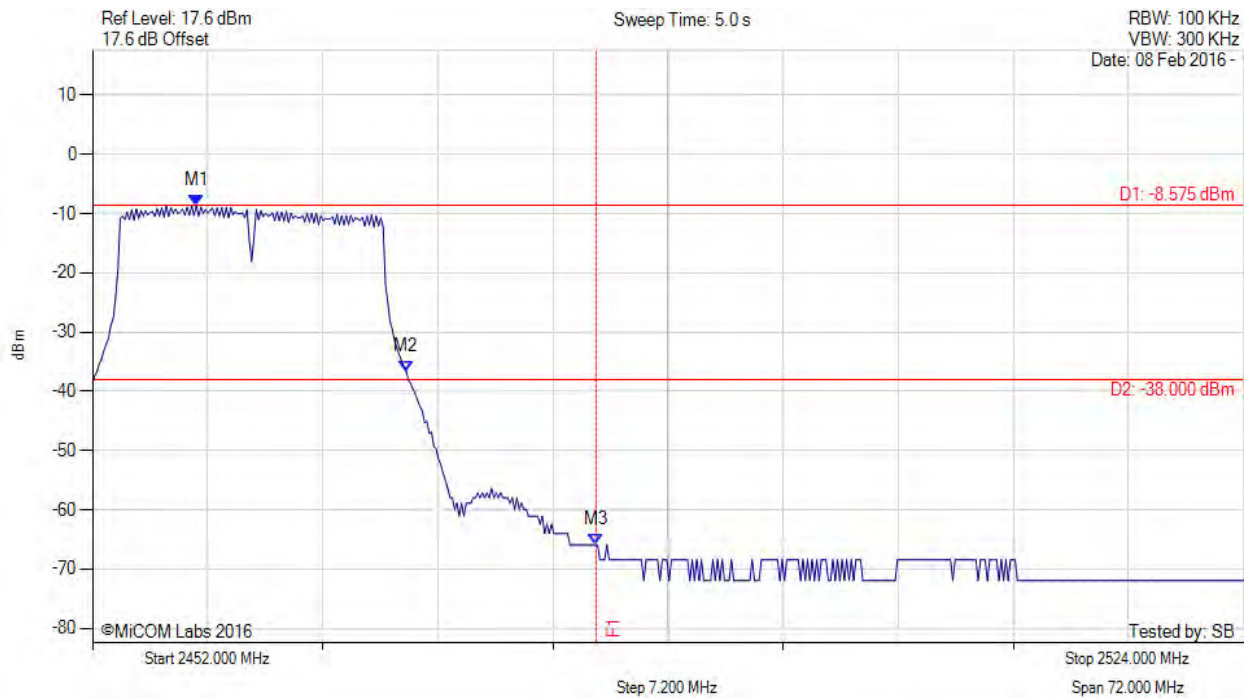

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2458.493 MHz : -8.575 dBm M2 : 2471.623 MHz : -36.602 dBm M3 : 2483.500 MHz : -65.924 dBm	Channel Frequency: 2462.00 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

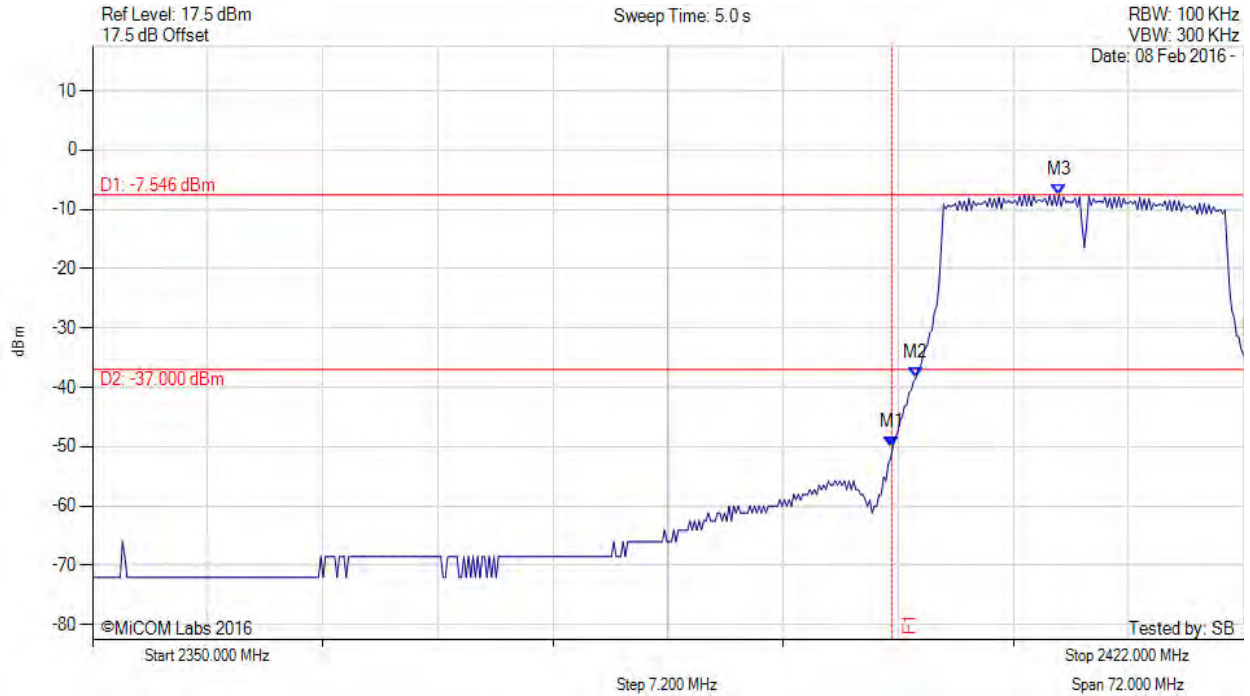

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2400.000 MHz : -50.107 dBm M2 : 2401.511 MHz : -38.420 dBm M3 : 2410.457 MHz : -7.546 dBm	Channel Frequency: 2412.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 147 of 223

CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

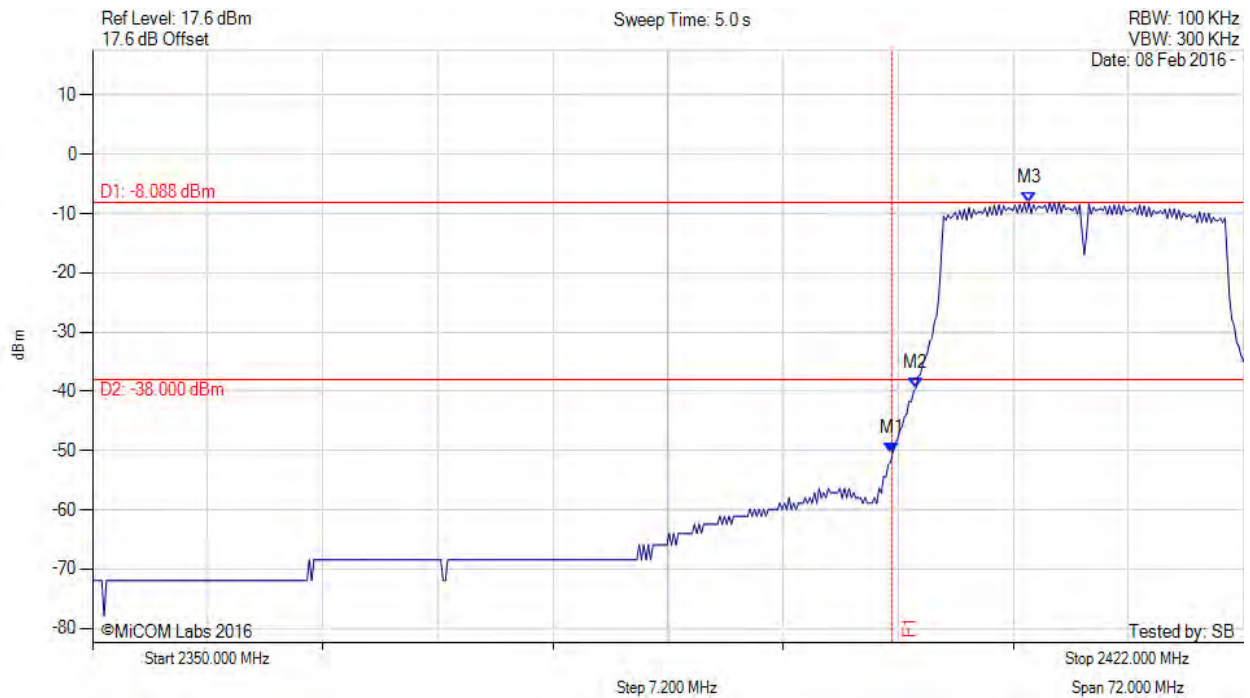

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2400.000 MHz : -50.361 dBm M2 : 2401.511 MHz : -39.377 dBm M3 : 2408.581 MHz : -8.088 dBm	Channel Frequency: 2412.00 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

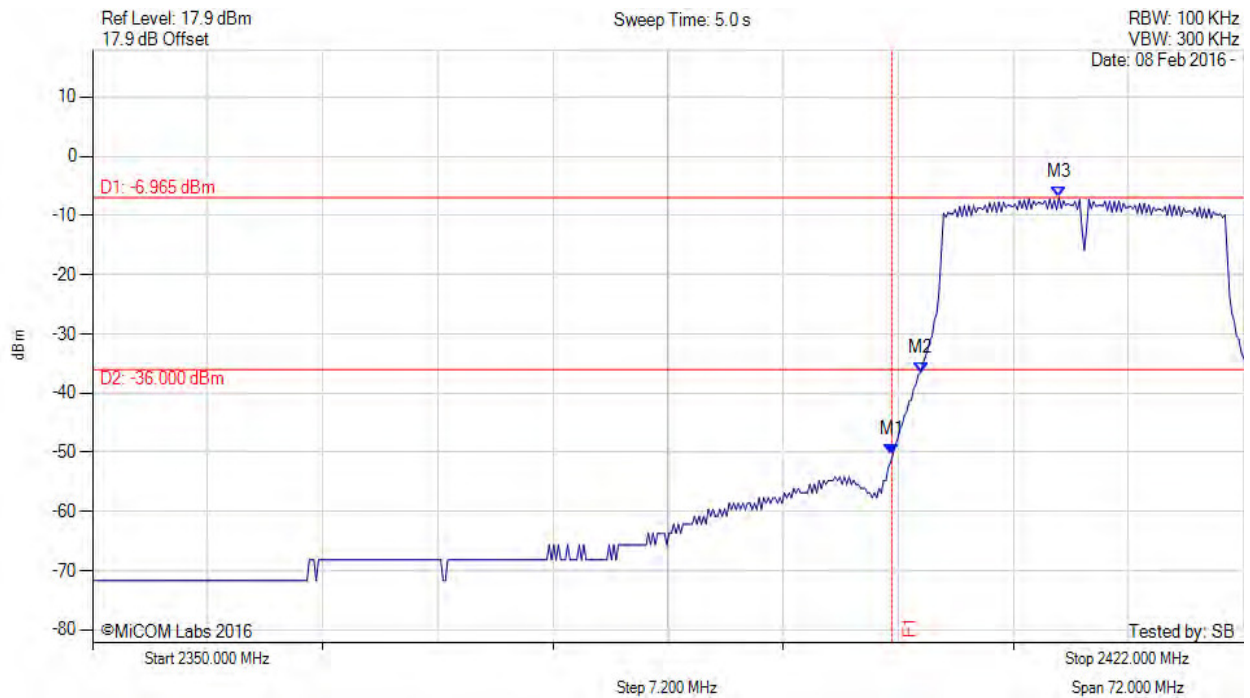

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2400.000 MHz : -50.431 dBm M2 : 2401.800 MHz : -36.527 dBm M3 : 2410.457 MHz : -6.965 dBm	Channel Frequency: 2412.00 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

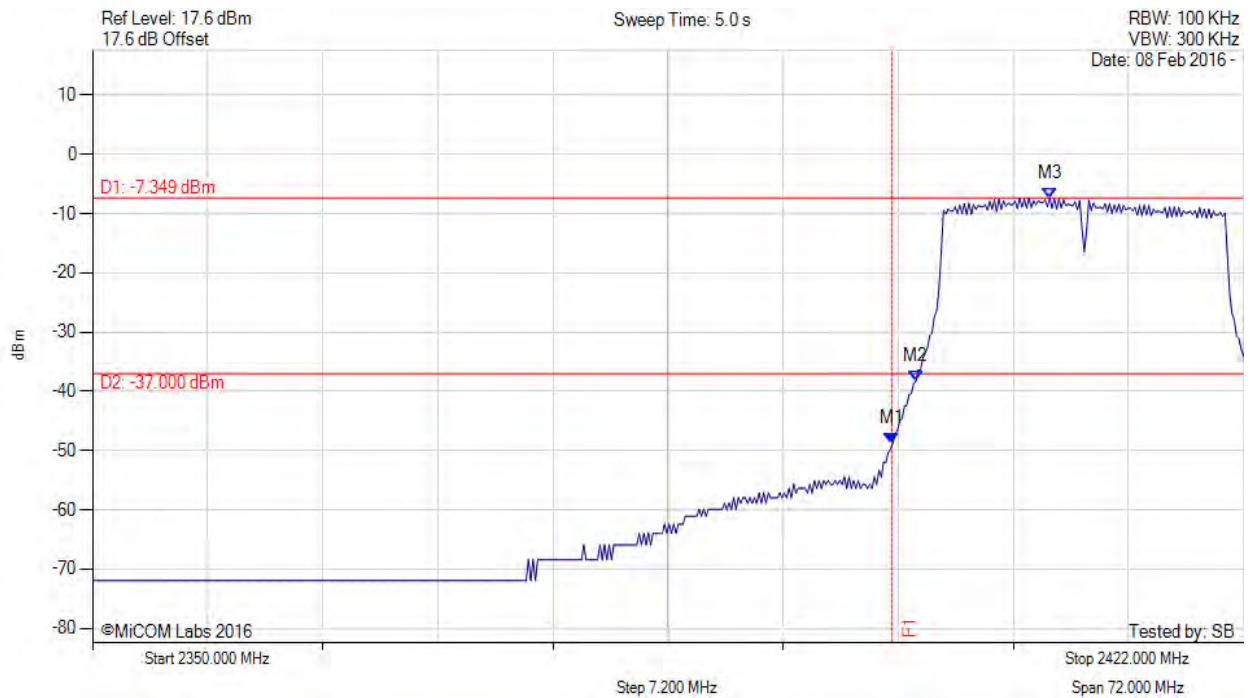

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2400.000 MHz : -48.717 dBm M2 : 2401.511 MHz : -38.230 dBm M3 : 2409.880 MHz : -7.349 dBm	Channel Frequency: 2412.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 150 of 223

CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

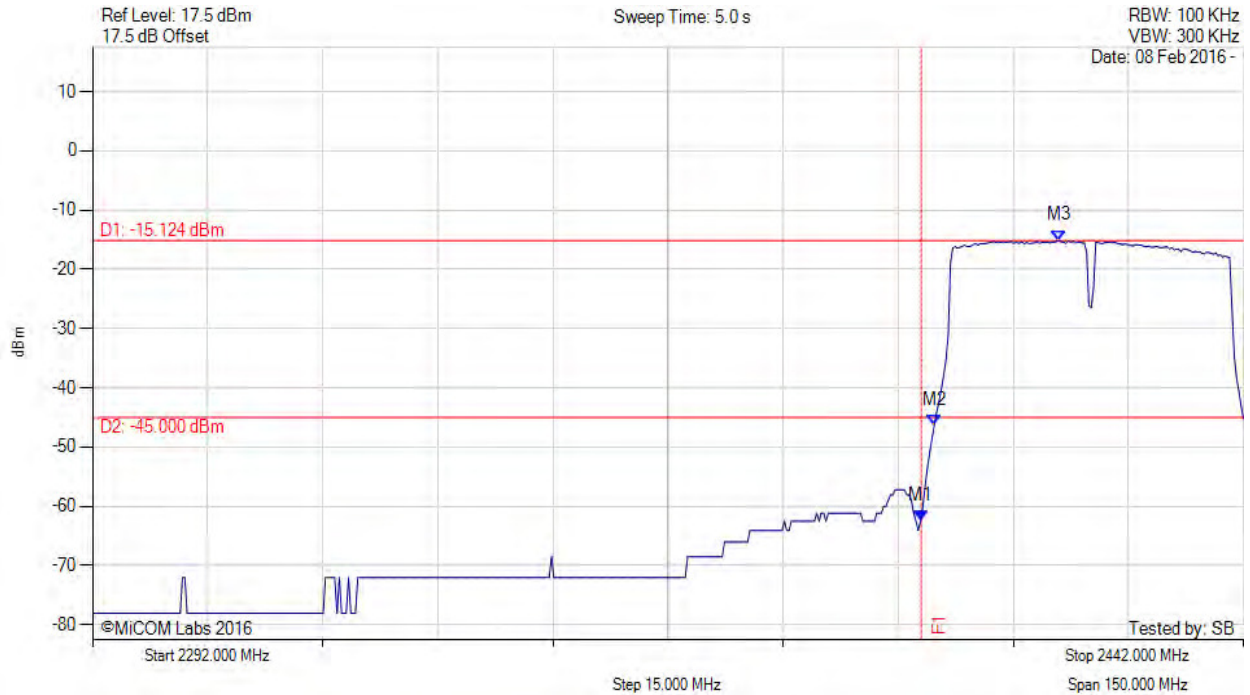

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2400.000 MHz : -62.502 dBm M2 : 2401.719 MHz : -46.244 dBm M3 : 2417.952 MHz : -15.124 dBm	Channel Frequency: 2422.00 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

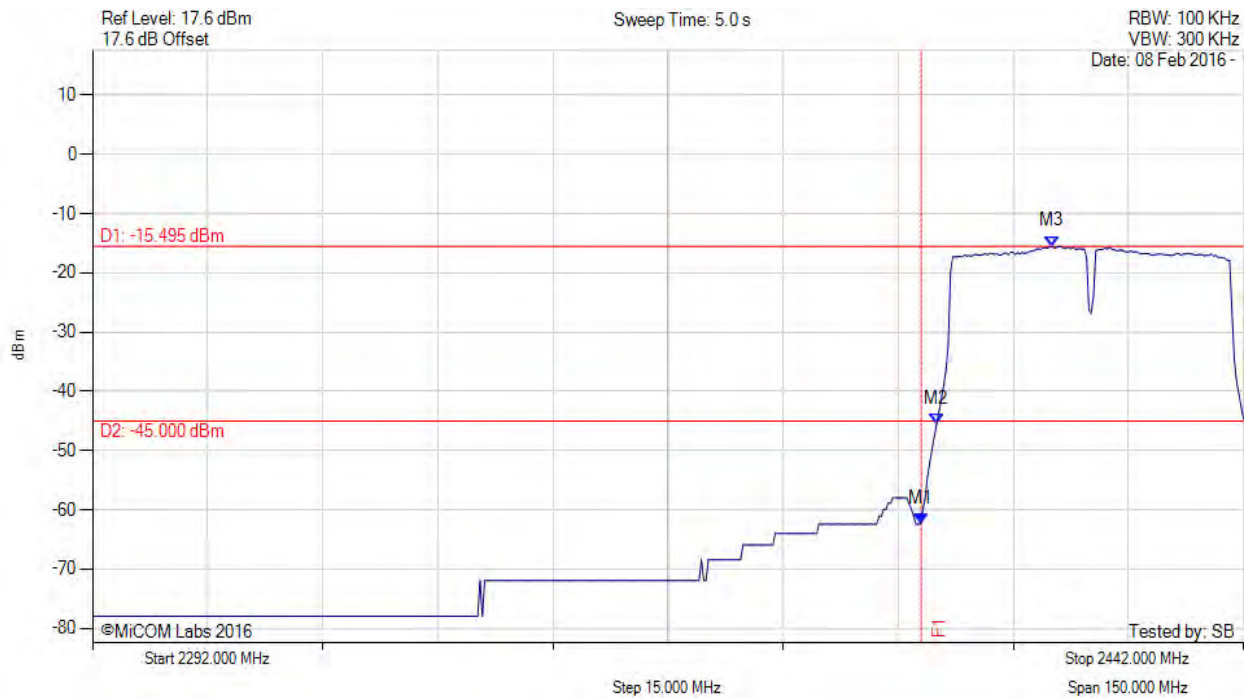

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2400.000 MHz : -62.402 dBm M2 : 2402.020 MHz : -45.500 dBm M3 : 2417.050 MHz : -15.495 dBm	Channel Frequency: 2422.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 152 of 223

CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

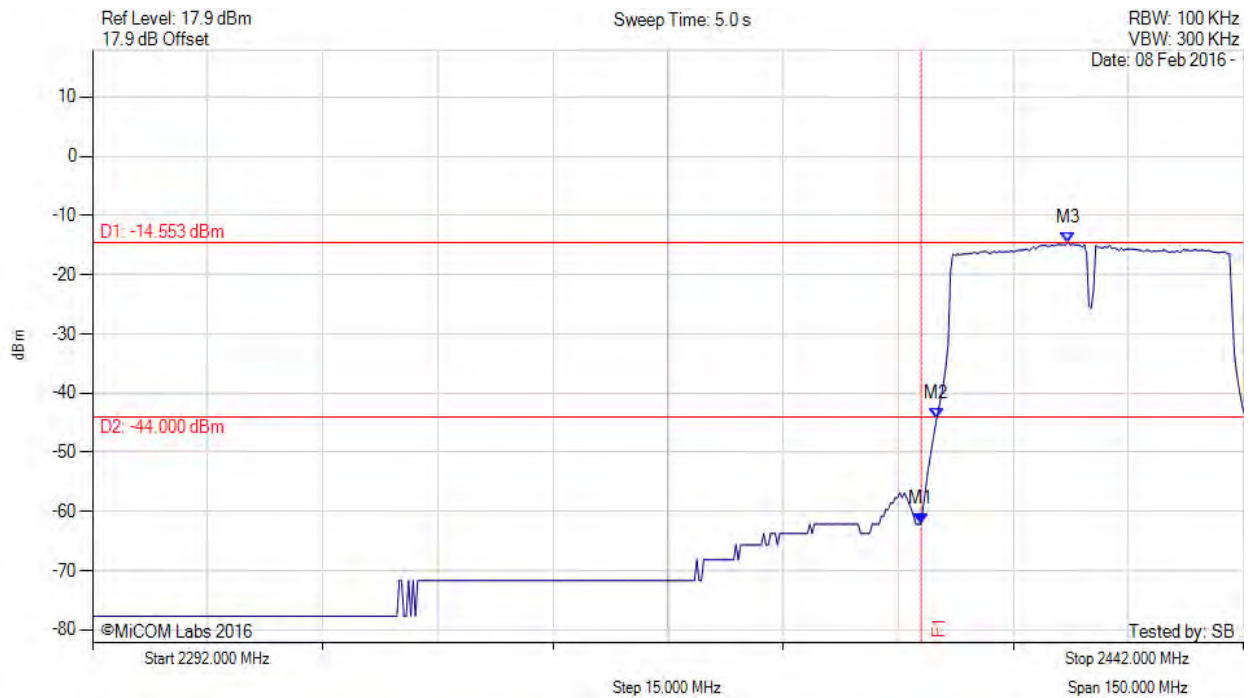

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2400.000 MHz : -62.102 dBm M2 : 2402.020 MHz : -44.223 dBm M3 : 2419.154 MHz : -14.553 dBm	Channel Frequency: 2422.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.





**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 153 of 223

CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc



Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2400.000 MHz : -61.063 dBm M2 : 2402.020 MHz : -45.500 dBm M3 : 2417.651 MHz : -15.080 dBm	Channel Frequency: 2422.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 154 of 223

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

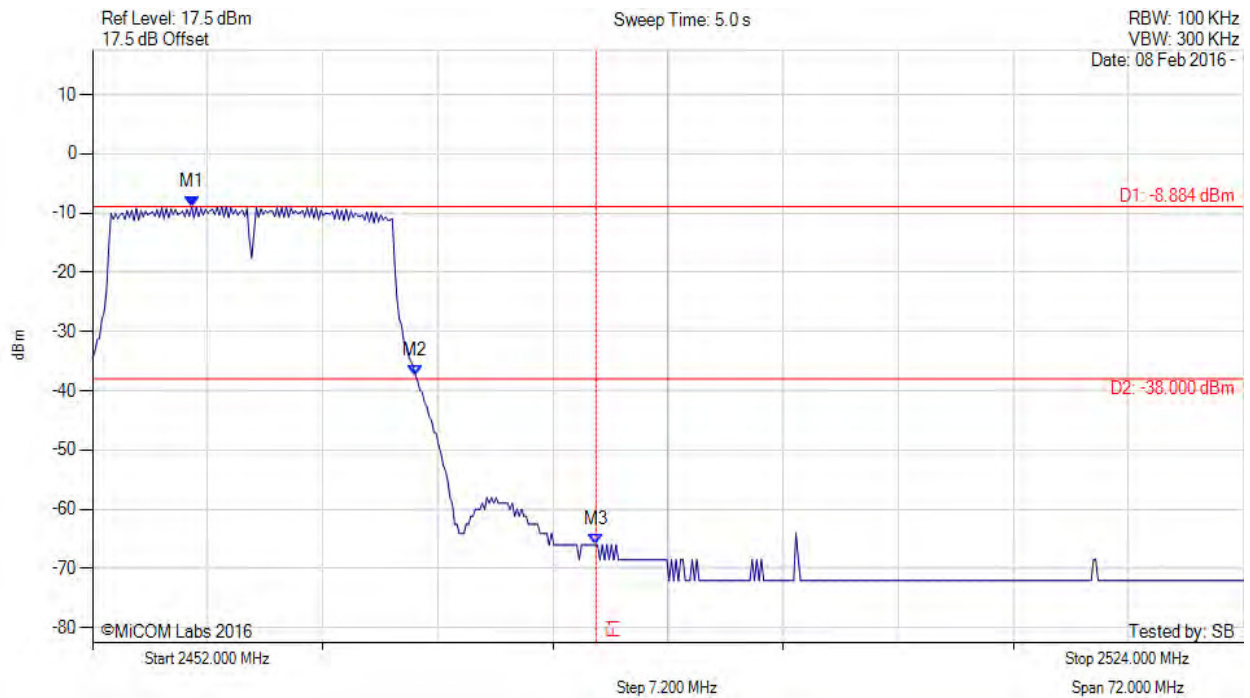

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2458.204 MHz : -8.884 dBm M2 : 2472.200 MHz : -37.397 dBm M3 : 2483.500 MHz : -66.024 dBm	Channel Frequency: 2462.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 155 of 223

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

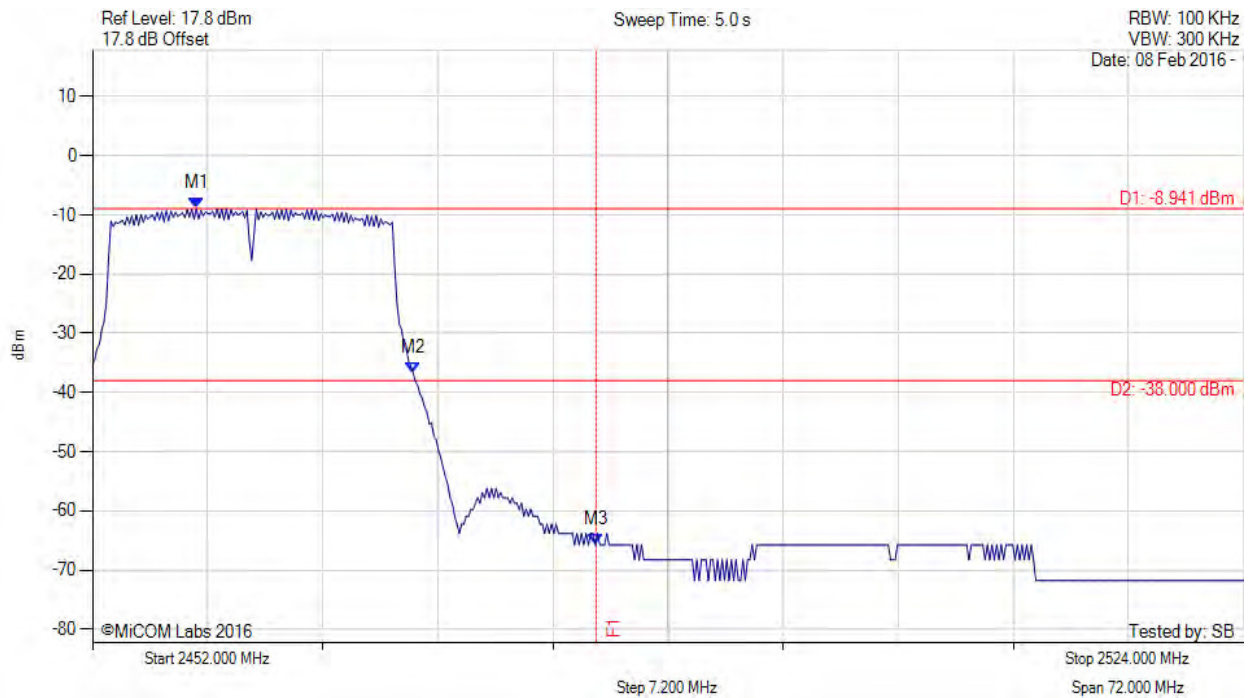

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2458.493 MHz : -8.941 dBm M2 : 2472.056 MHz : -36.704 dBm M3 : 2483.500 MHz : -65.724 dBm	Channel Frequency: 2462.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 156 of 223

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

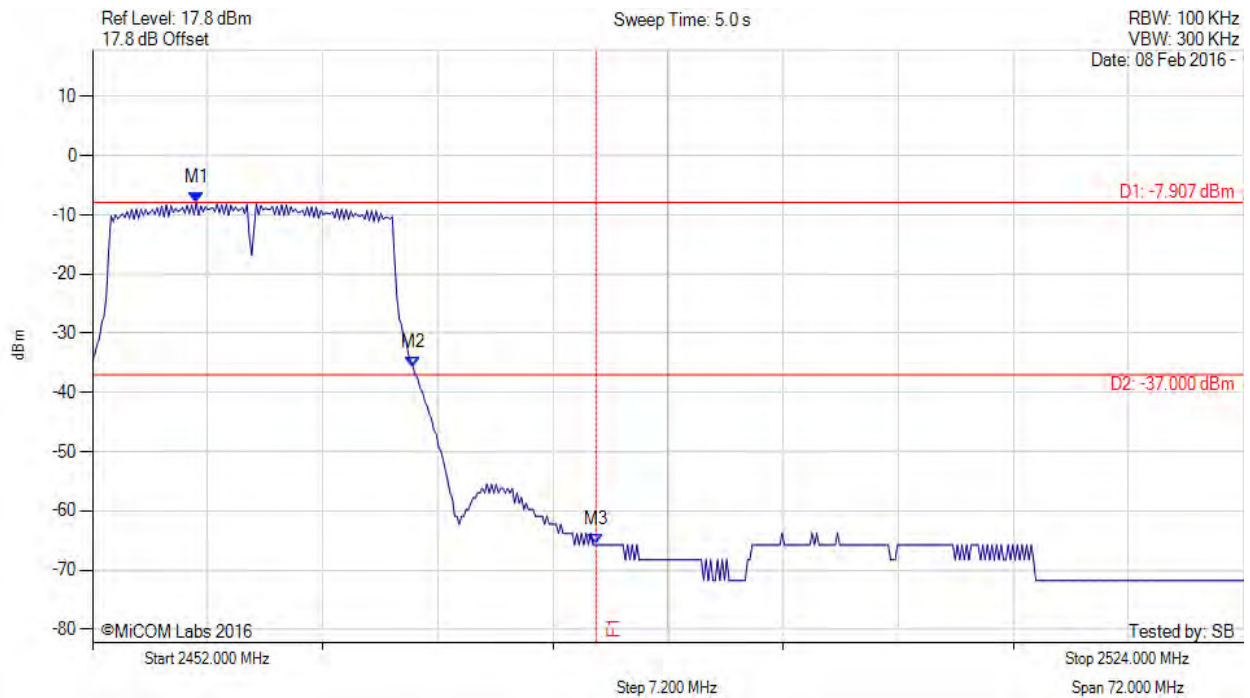

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2458.493 MHz : -7.907 dBm M2 : 2472.056 MHz : -35.758 dBm M3 : 2483.500 MHz : -65.724 dBm	Channel Frequency: 2462.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 157 of 223

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

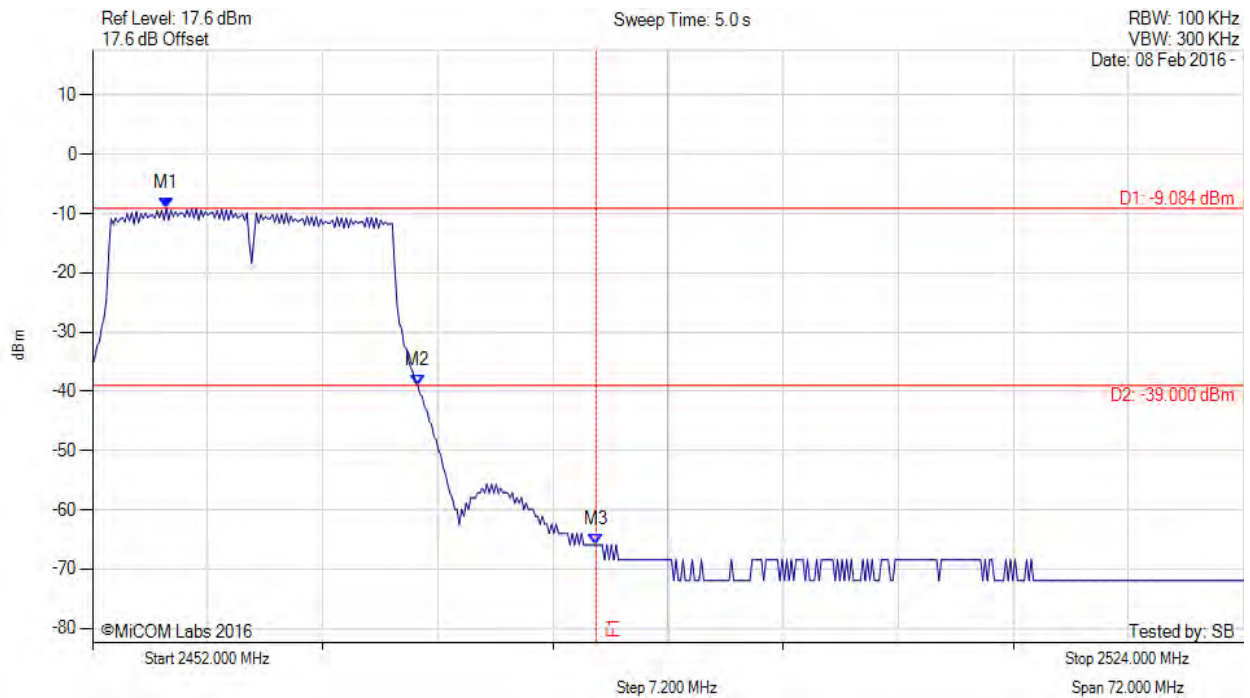

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2456.617 MHz : -9.084 dBm M2 : 2472.345 MHz : -38.978 dBm M3 : 2483.500 MHz : -65.924 dBm	Channel Frequency: 2462.00 MHz

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

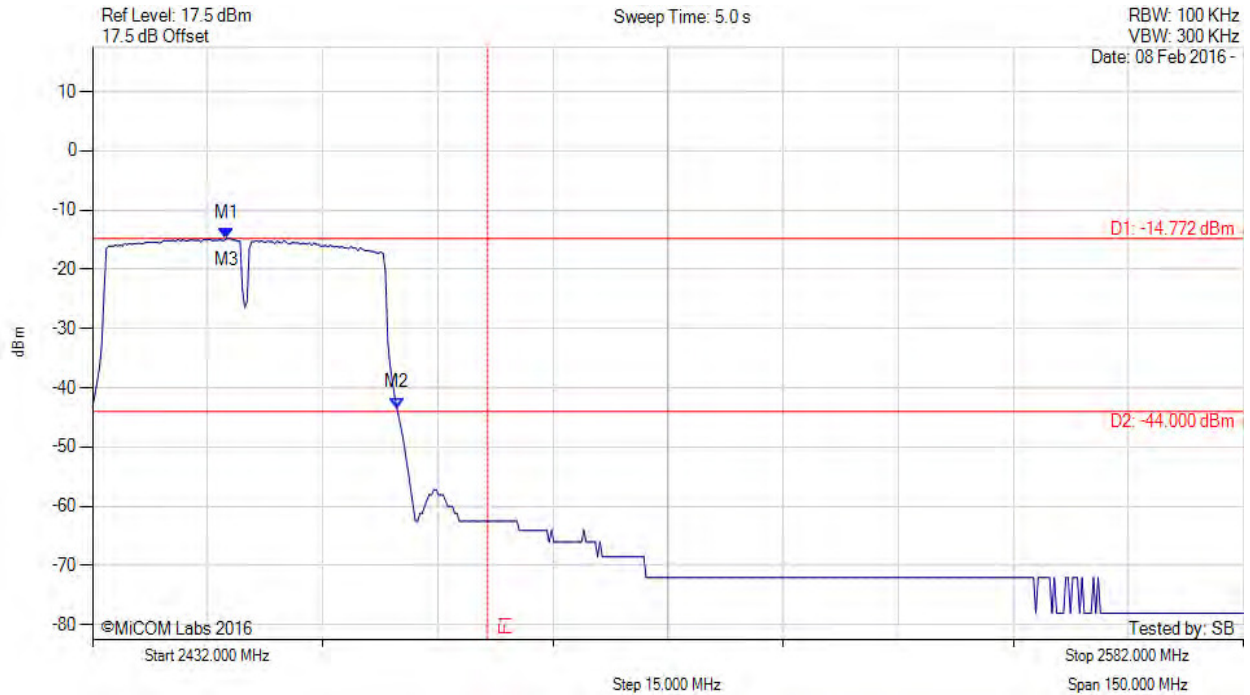

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2449.435 MHz : -14.772 dBm M2 : 2471.679 MHz : -43.417 dBm M3 : 2449.435 MHz : -14.772 dBm	Channel Frequency: 2452.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 159 of 223

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

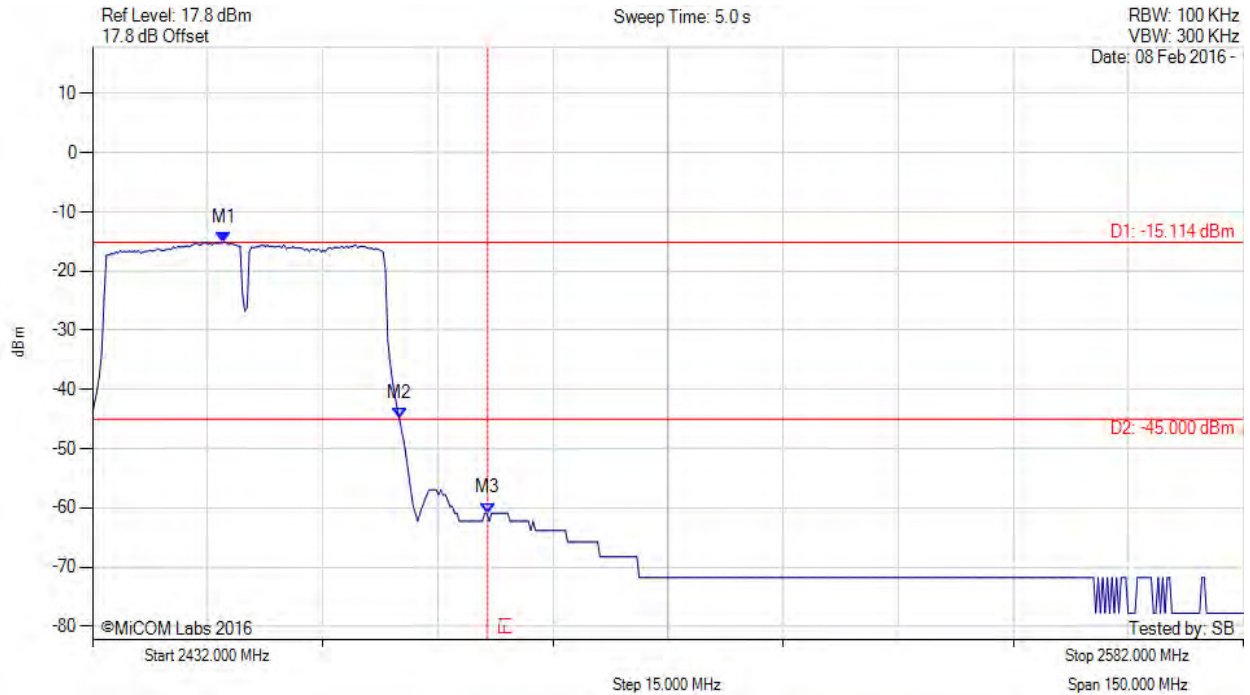

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2449.134 MHz : -15.114 dBm M2 : 2471.980 MHz : -44.896 dBm M3 : 2483.500 MHz : -60.863 dBm	Channel Frequency: 2452.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 160 of 223

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

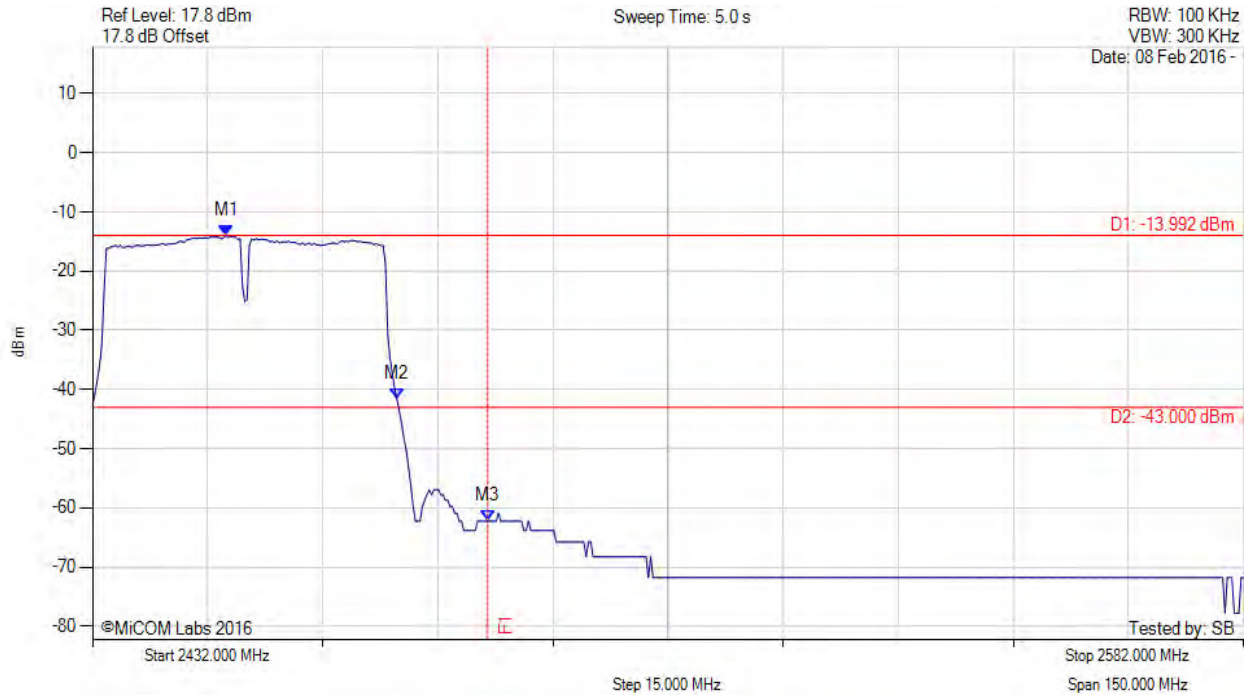

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2449.435 MHz : -13.992 dBm M2 : 2471.679 MHz : -41.642 dBm M3 : 2483.500 MHz : -62.202 dBm	Channel Frequency: 2452.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

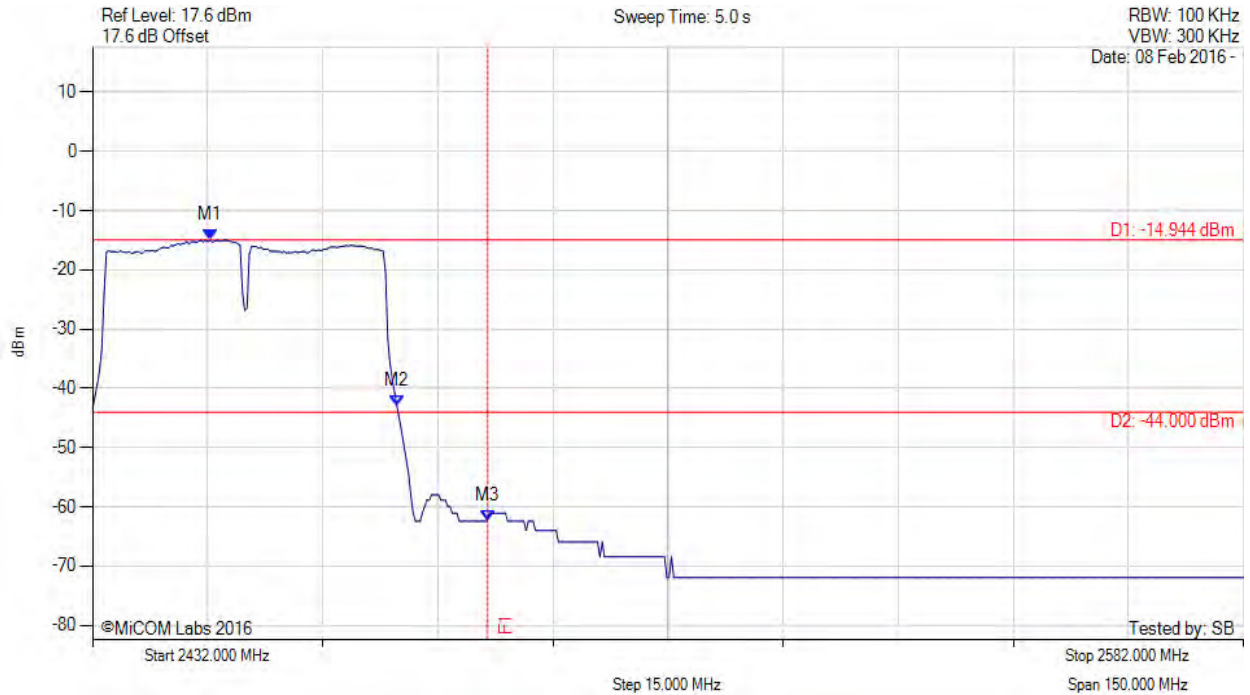

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 10 Trace Mode = VIEW	M1 : 2447.331 MHz : -14.944 dBm M2 : 2471.679 MHz : -43.002 dBm M3 : 2483.500 MHz : -62.402 dBm	Channel Frequency: 2452.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 162 of 223

### A.3. Power Spectral Density



#### POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2412.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

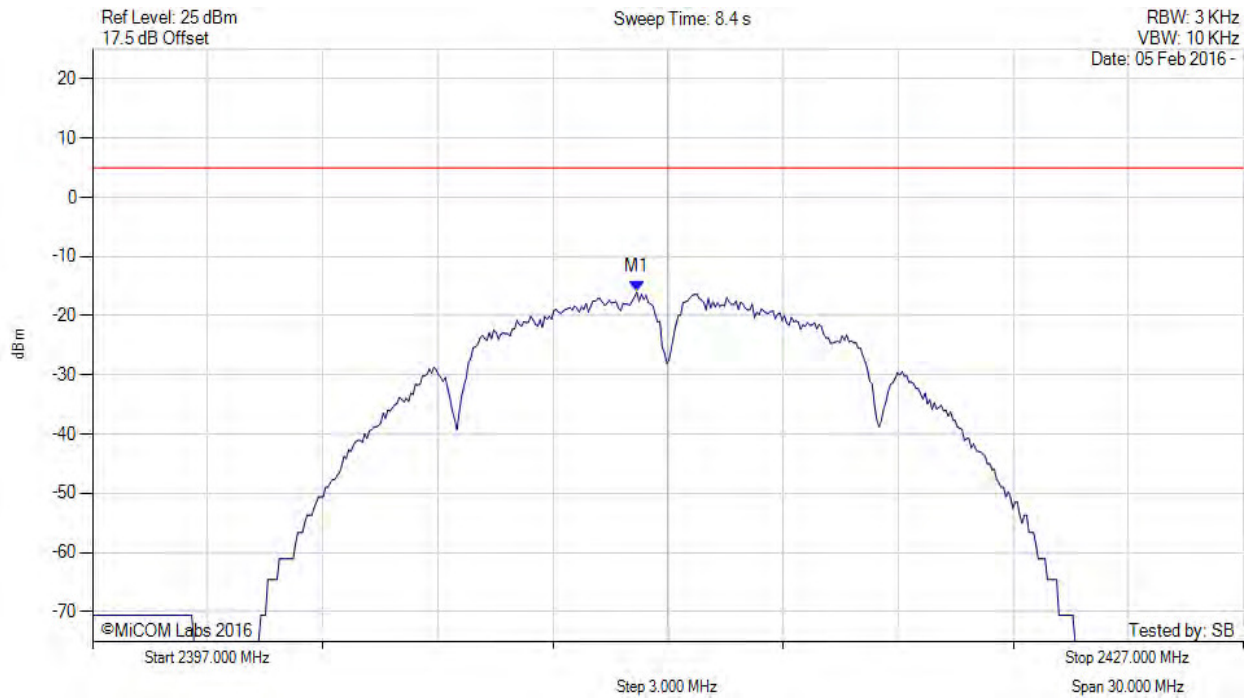

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2411.188 MHz : -16.015 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 163 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

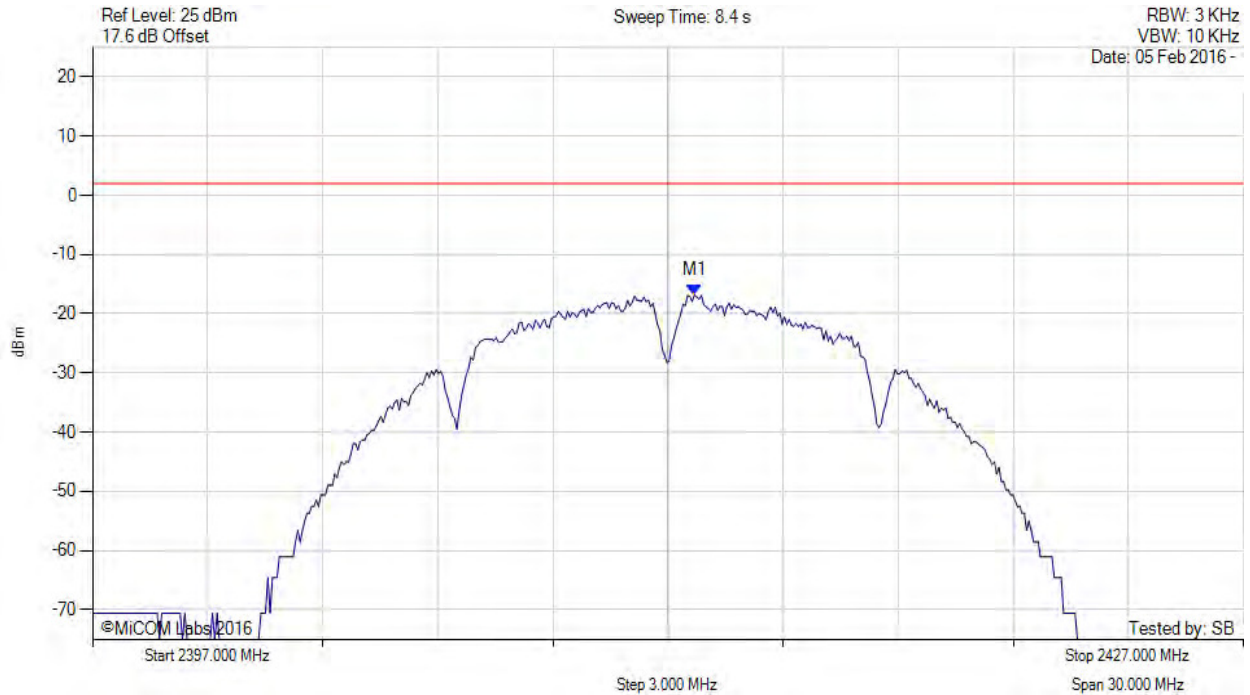

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2412.691 MHz : -16.797 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 164 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2412.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

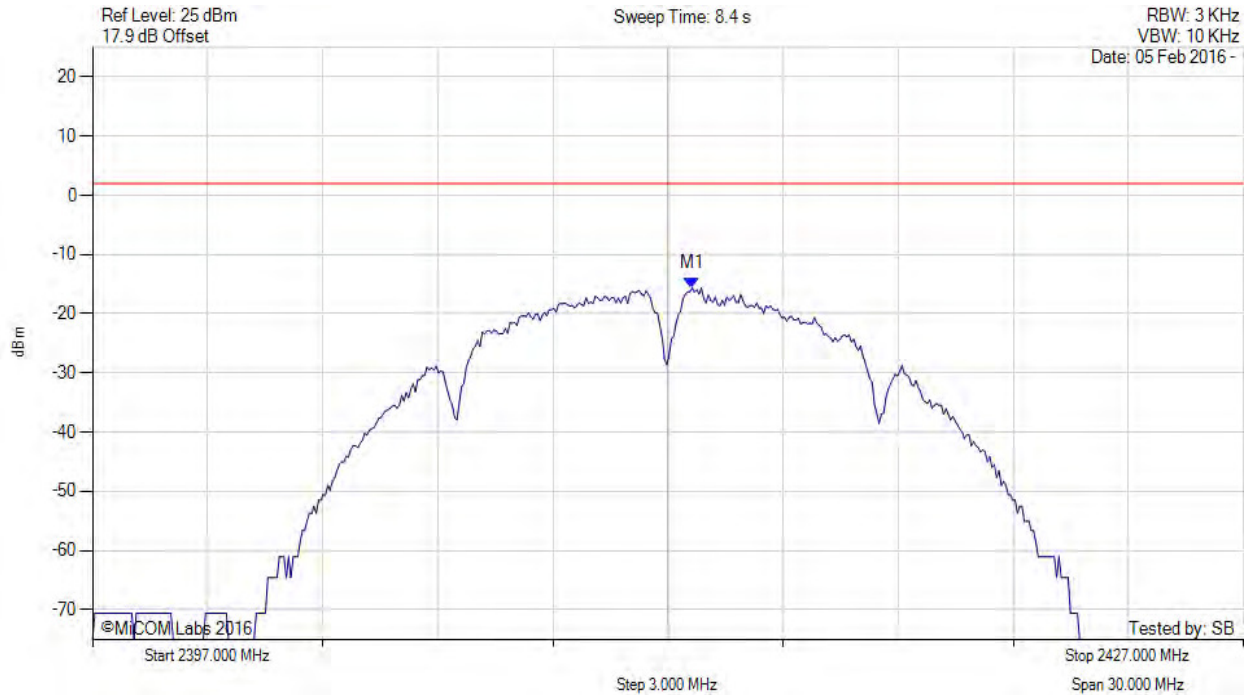

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2412.631 MHz : -15.633 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 165 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2412.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

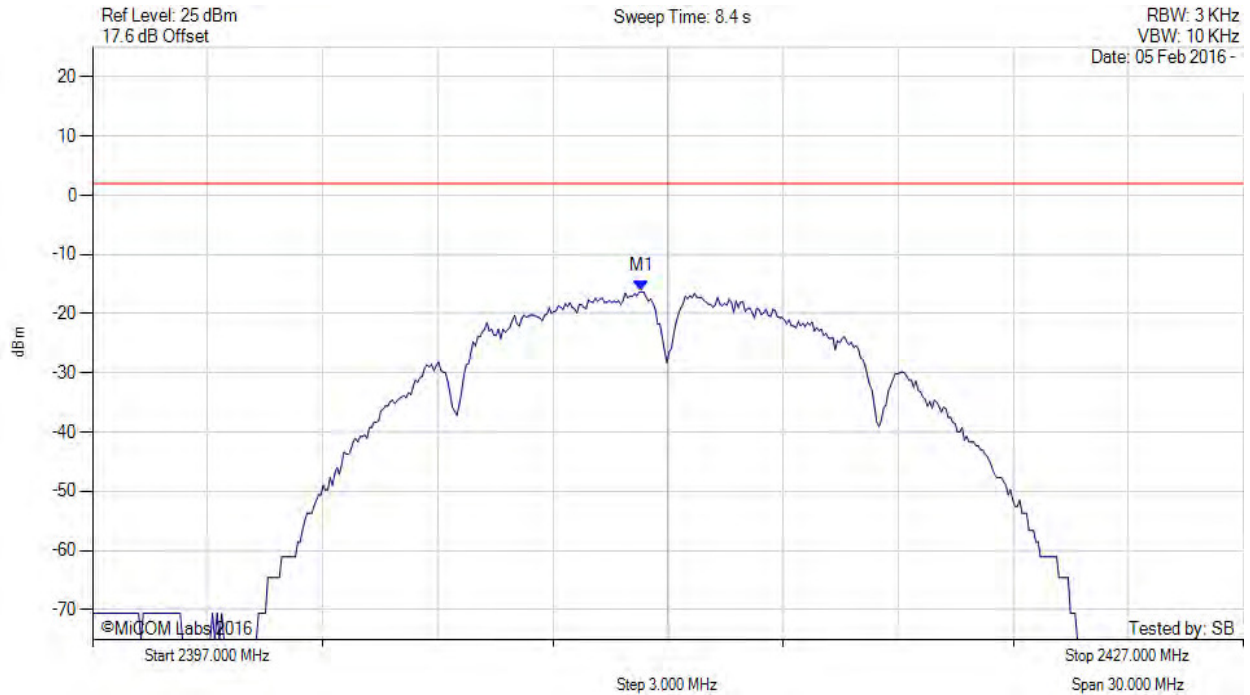

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2411.309 MHz : -16.262 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 166 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2412.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

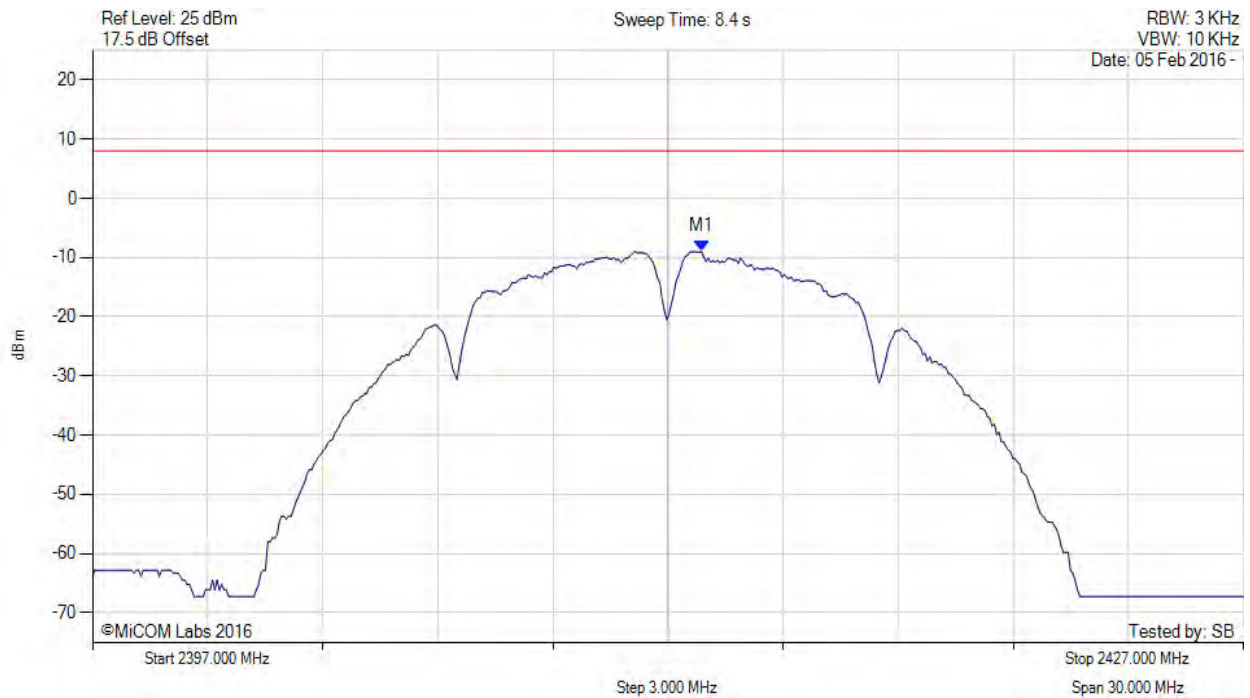

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2412.900 MHz : -8.941 dBm M1 + DCCF : 2412.900 MHz : -8.897 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 8.0$ dBm Margin: -16.9 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 167 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2412.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc



Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2412.900 MHz : -10.583 dBm M1 + DCCF : 2412.900 MHz : -10.539 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 8.0$ dBm Margin: -18.6 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 168 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

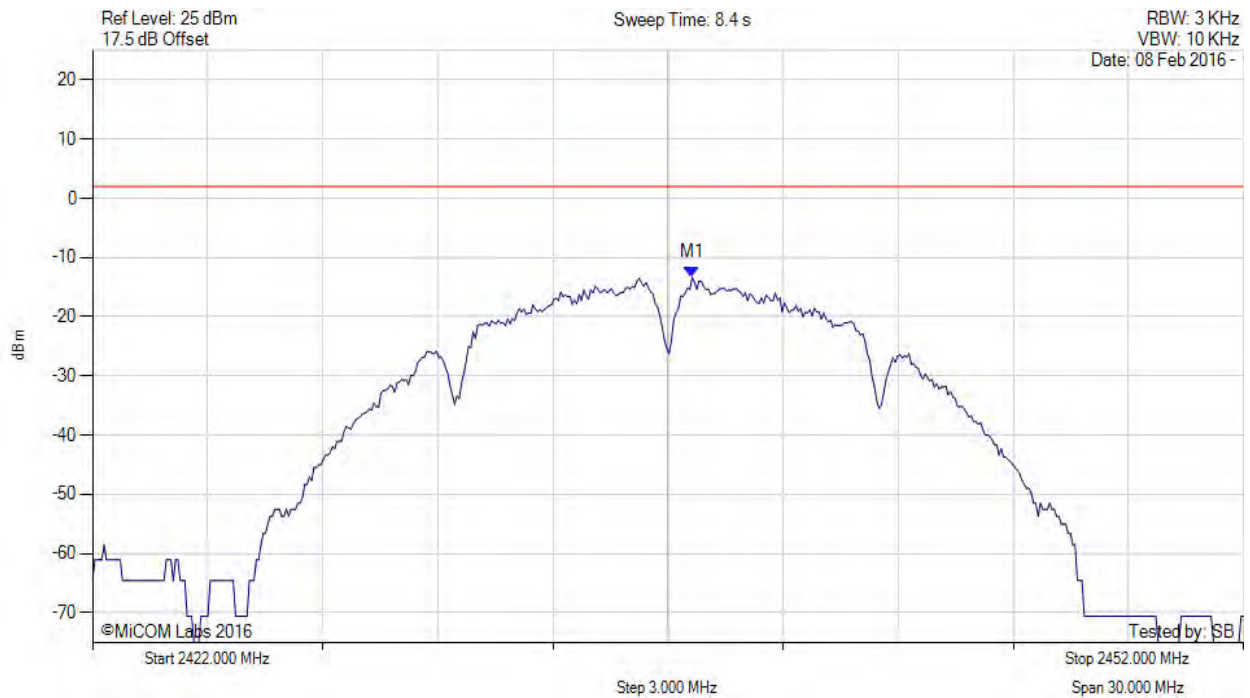

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2437.631 MHz : -13.311 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 169 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

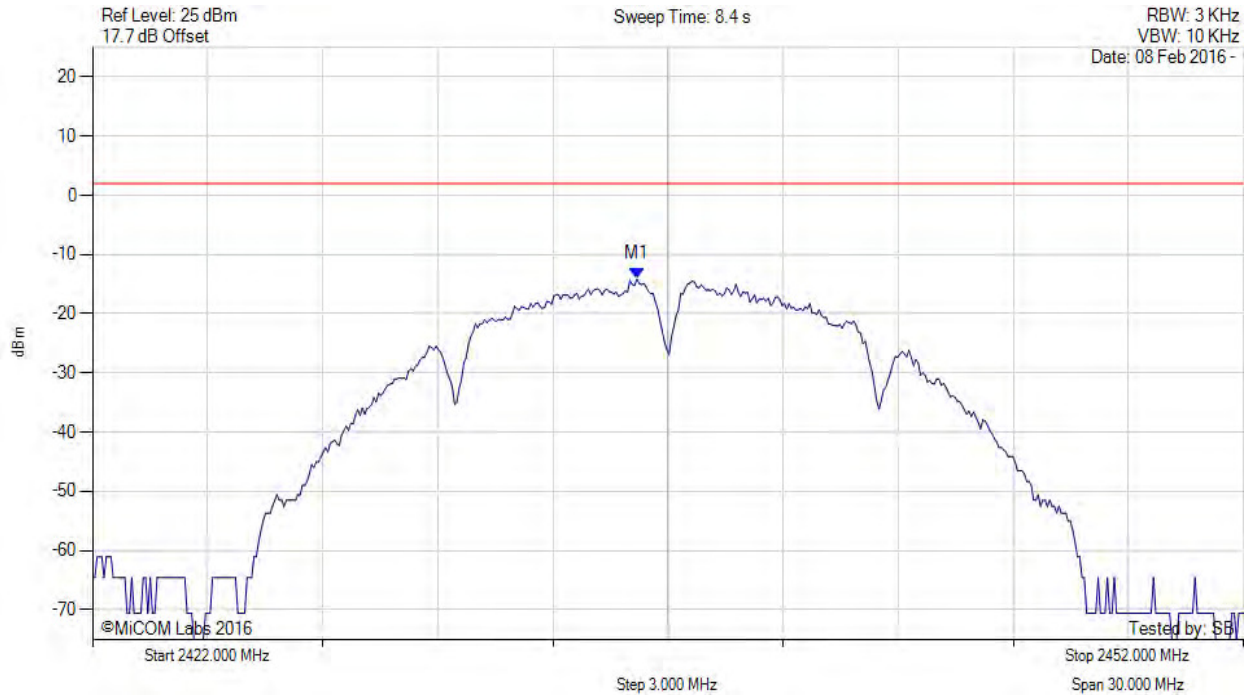

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2436.188 MHz : -14.135 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 170 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

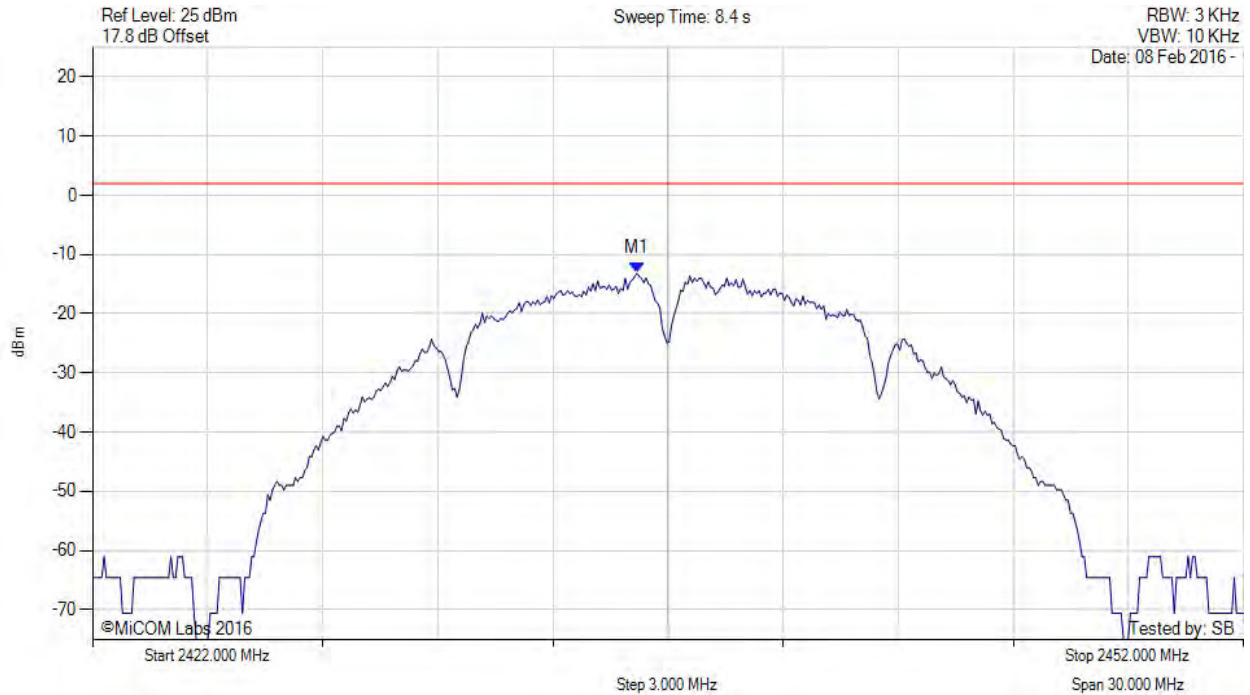

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2436.188 MHz : -13.204 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 171 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2437.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

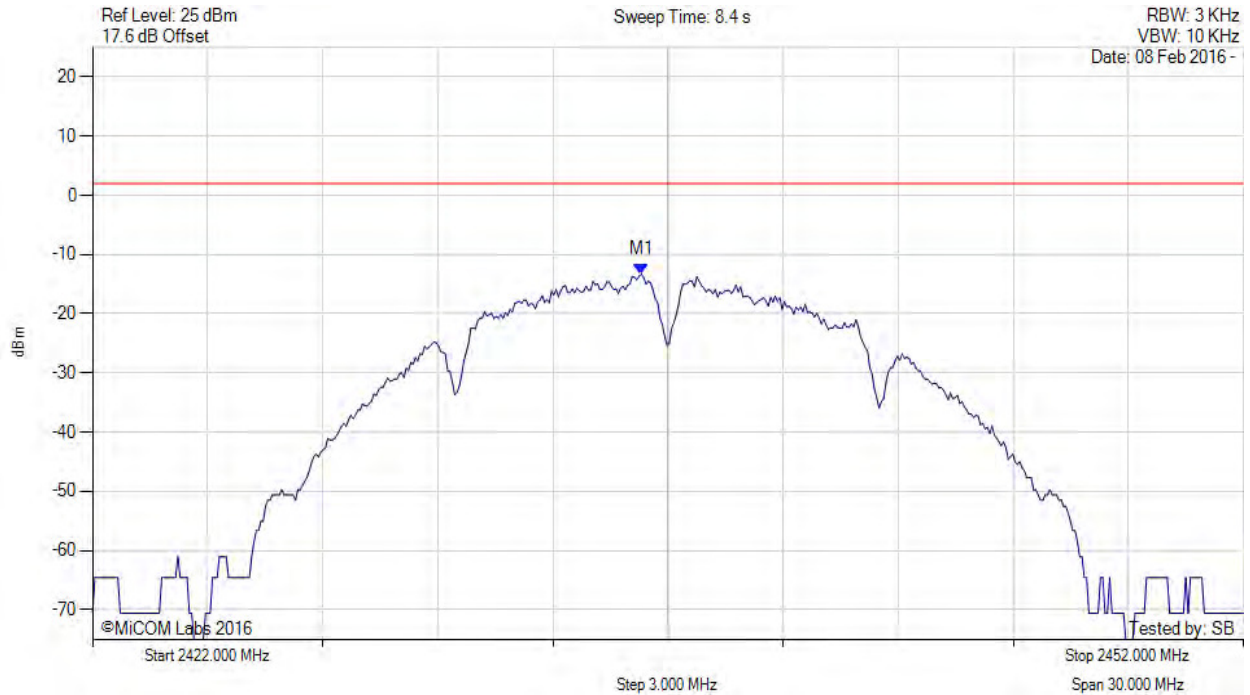

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2436.309 MHz : -13.287 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 172 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variation: 802.11b, Channel: 2437.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

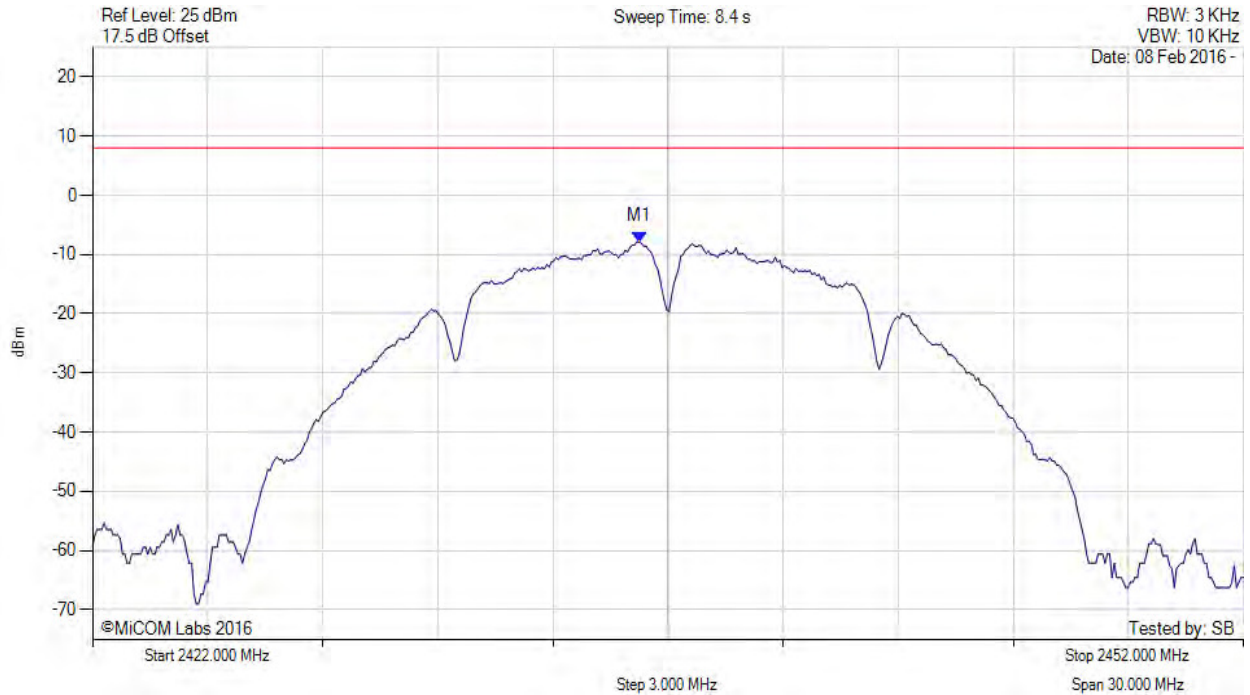

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2436.200 MHz : -7.866 dBm M1 + DCCF : 2436.200 MHz : -7.866 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -15.9 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 173 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2462.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

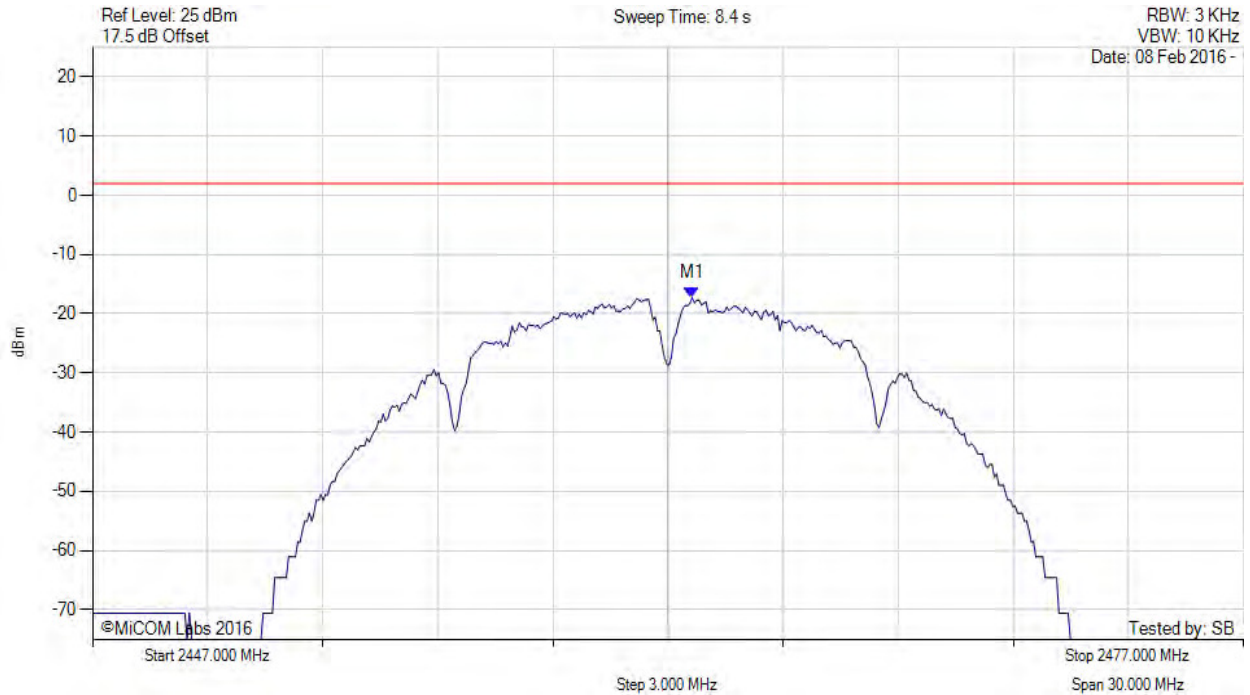

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2462.631 MHz : -17.310 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 174 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2462.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

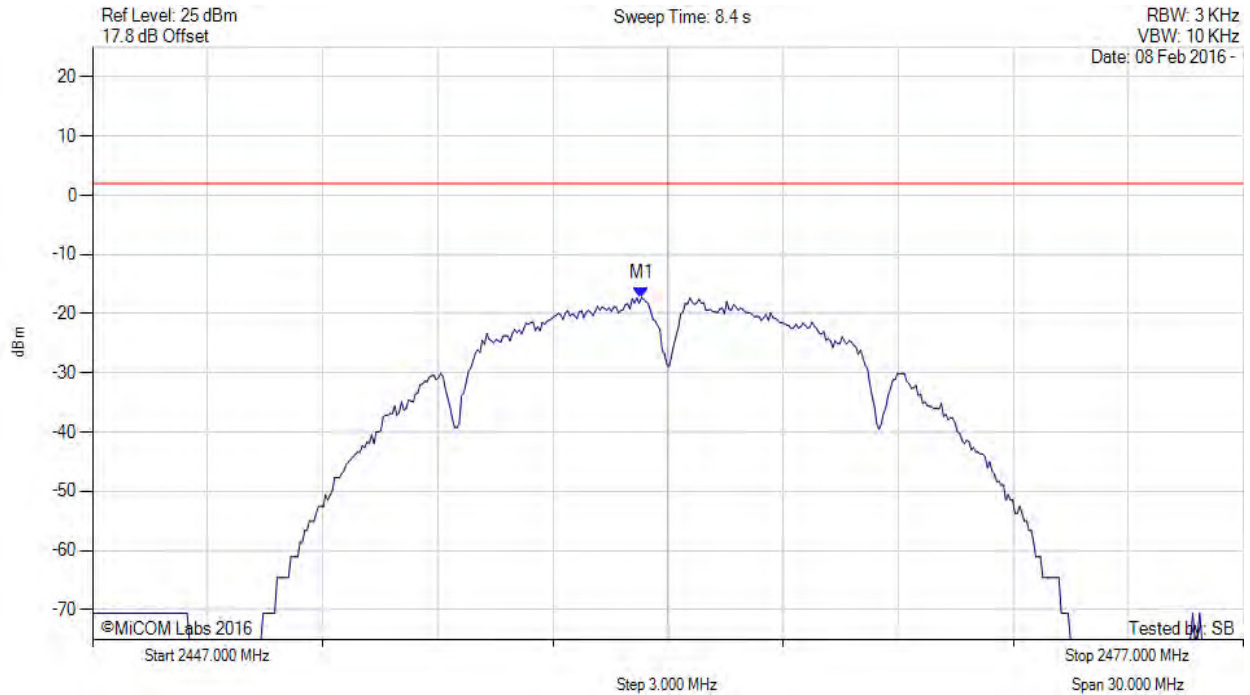

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2461.309 MHz : -17.291 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 175 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2462.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

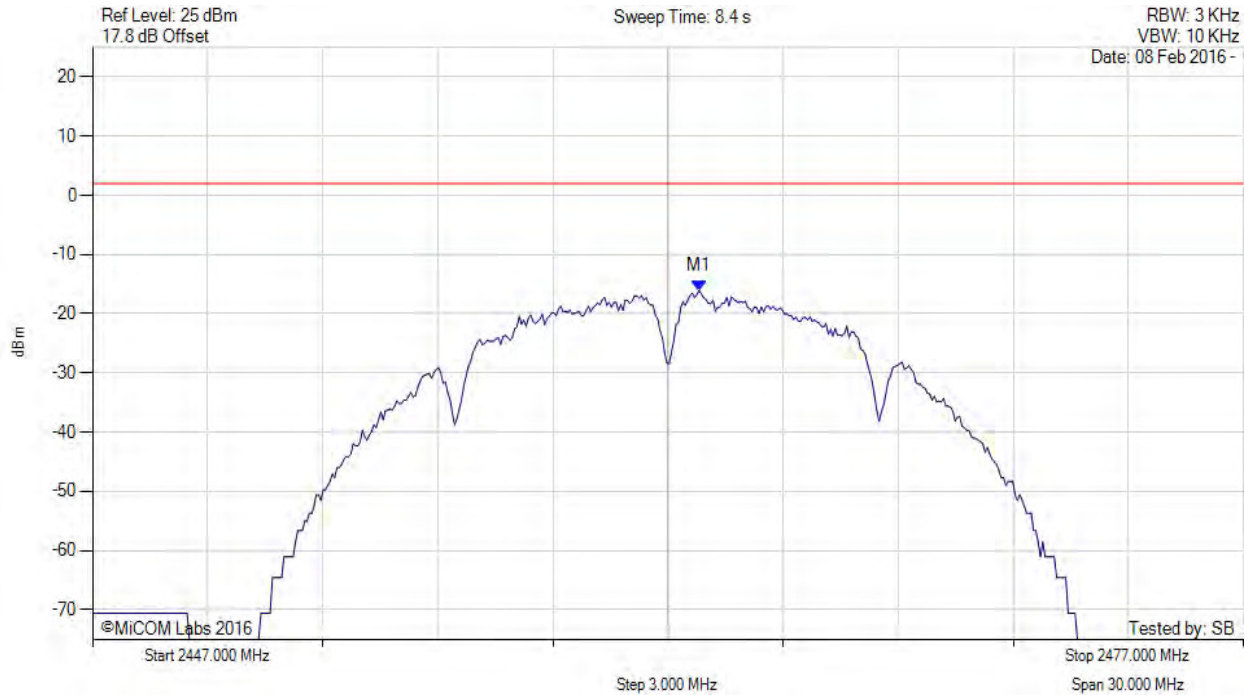

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2462.812 MHz : -16.080 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 176 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2462.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

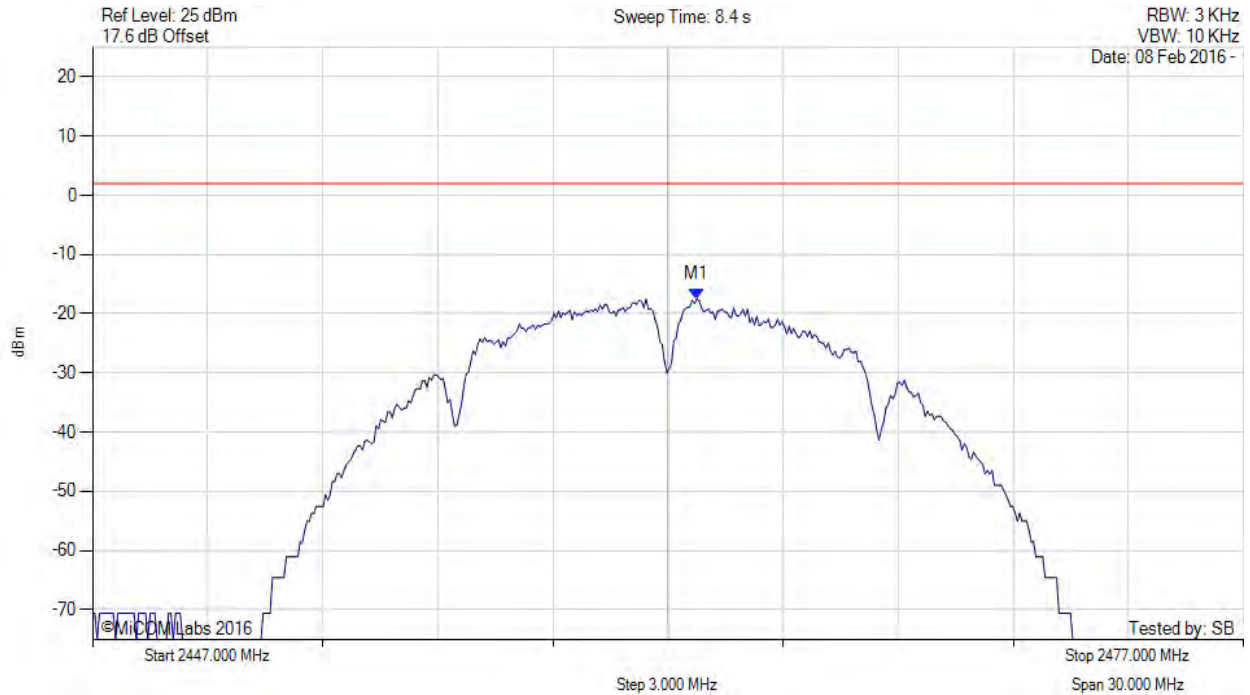

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2462.752 MHz : -17.482 dBm	Limit: ≤ 4.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 177 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variation: 802.11b, Channel: 2462.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

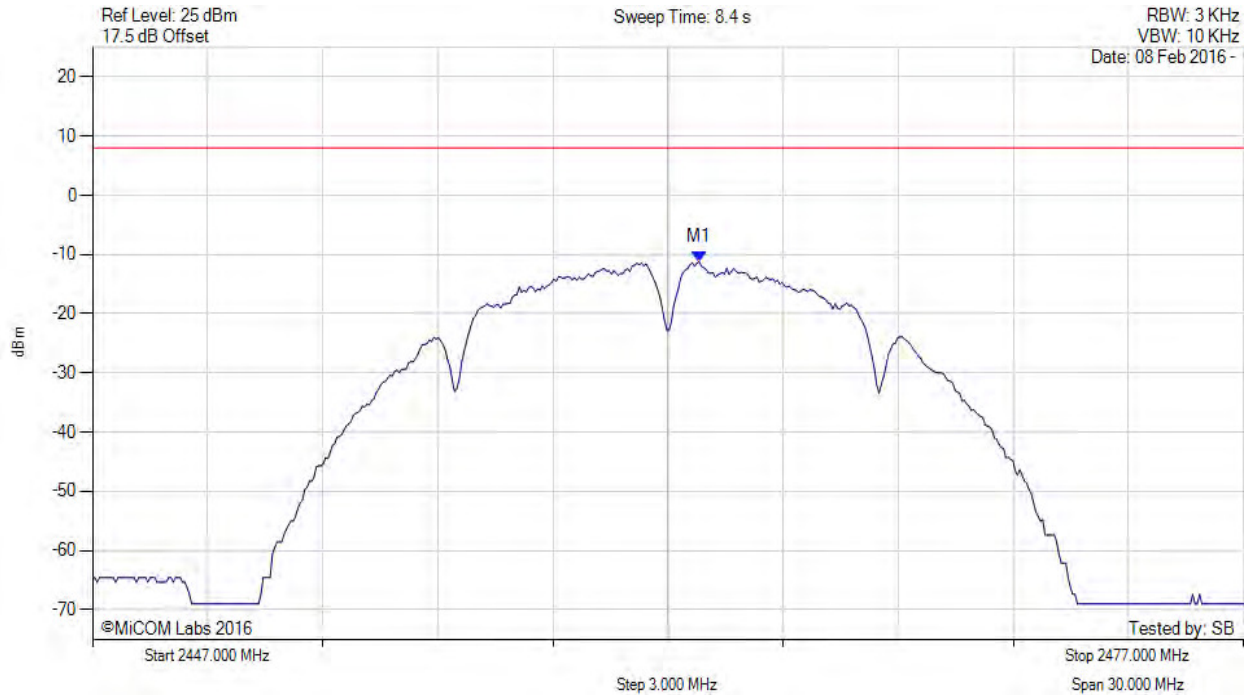

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2462.800 MHz : -11.198 dBm M1 + DCCF : 2462.800 MHz : -11.198 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 8.0$ dBm Margin: -19.2 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 178 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2412.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

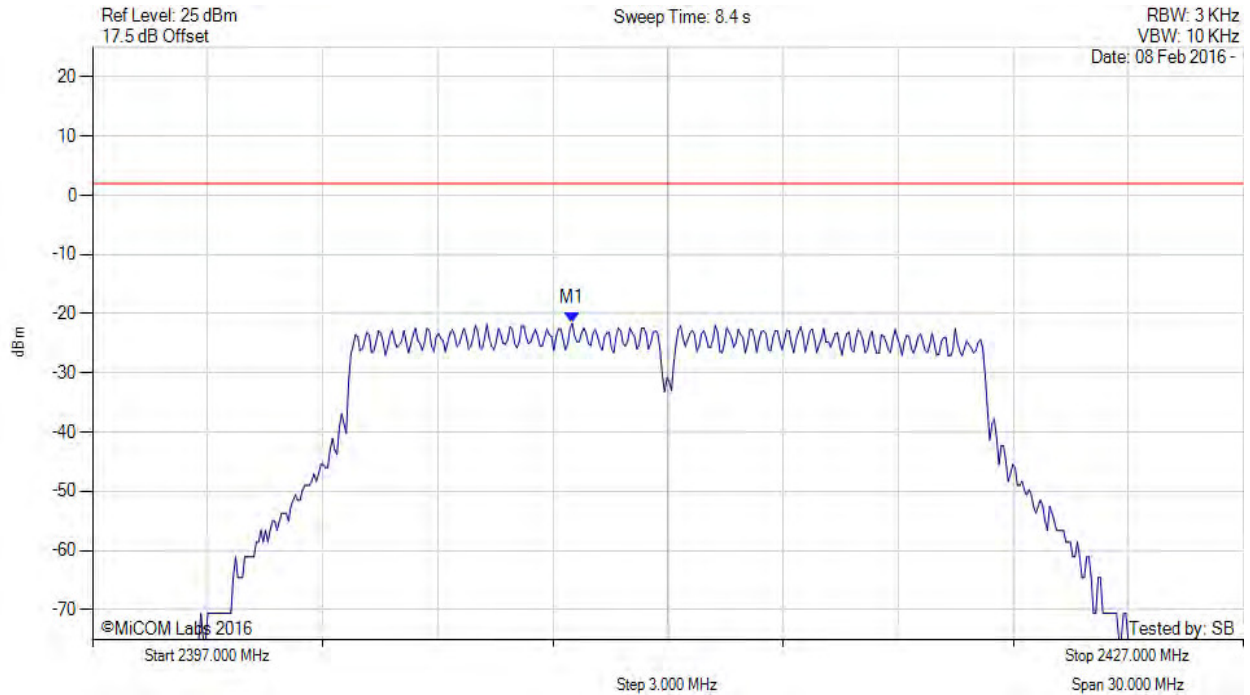

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2409.505 MHz : -21.622 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 179 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

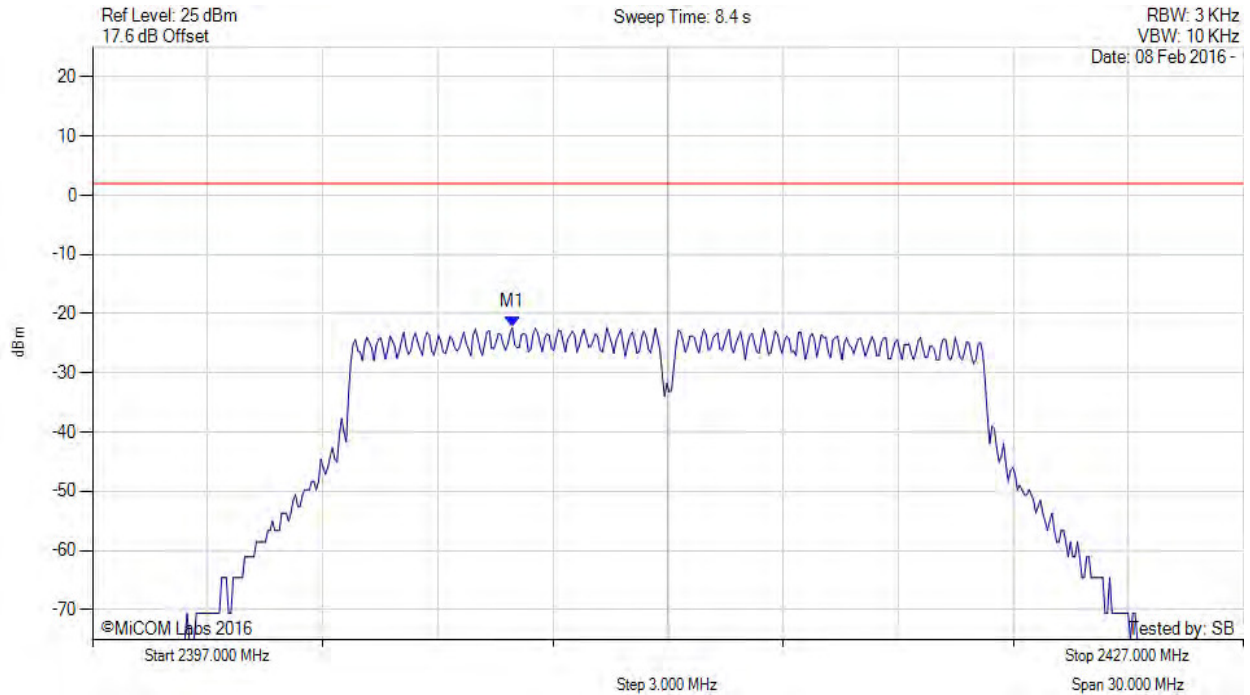

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2407.942 MHz : -22.333 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 180 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2412.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

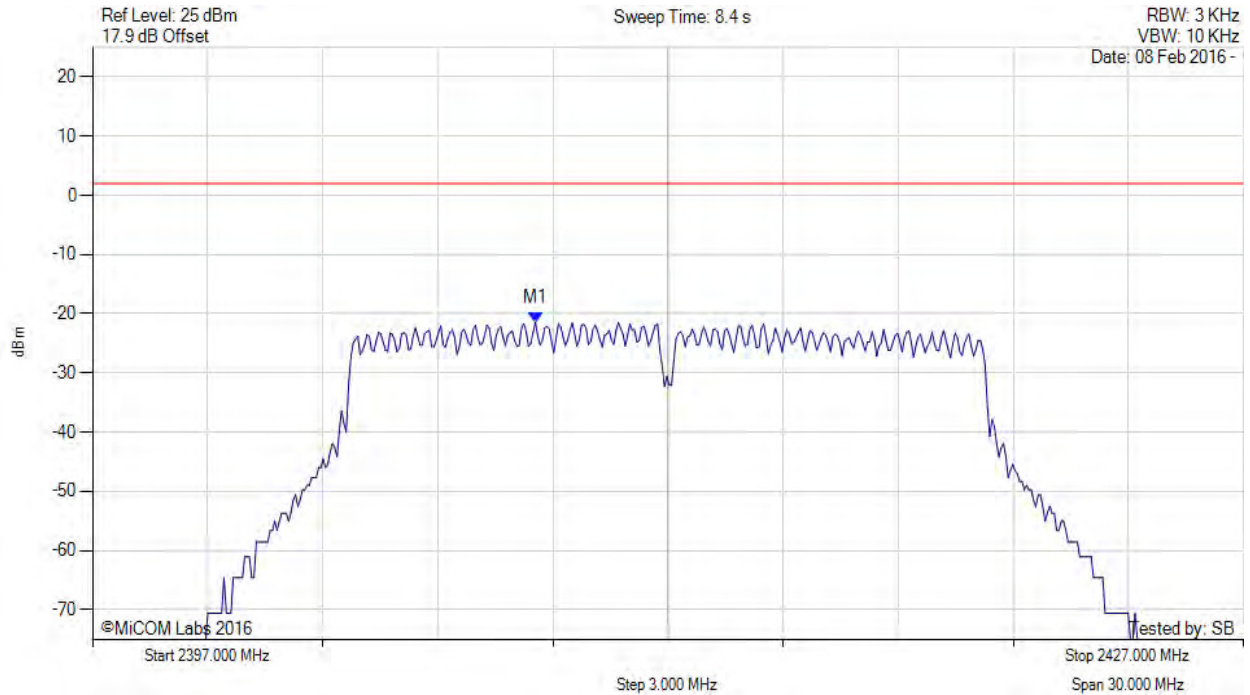

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2408.543 MHz : -21.438 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 181 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2412.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

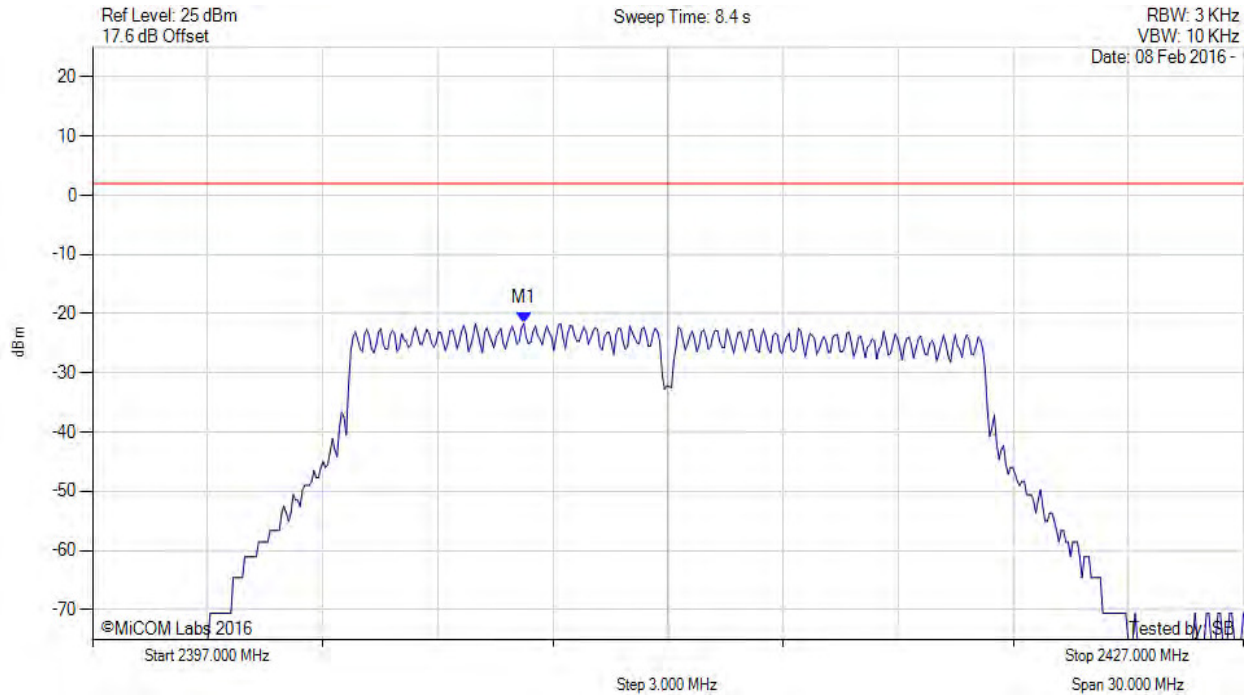

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2408.242 MHz : -21.622 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 182 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variants: 802.11g, Channel: 2412.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

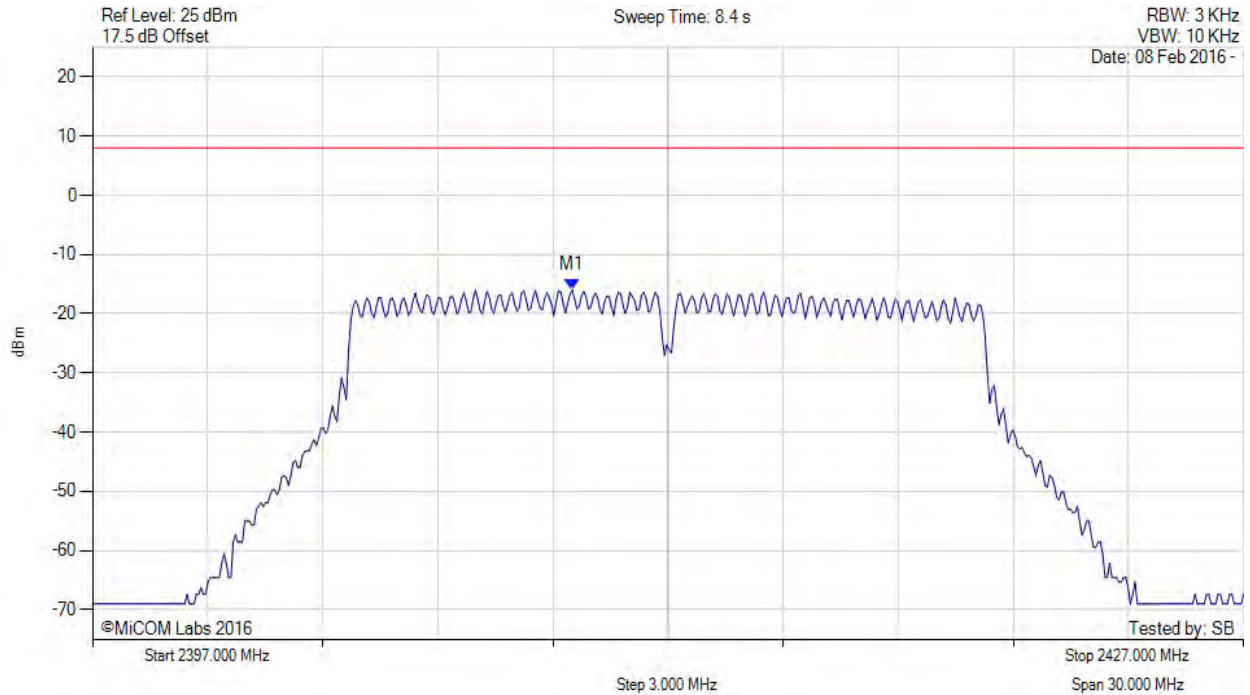

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2409.500 MHz : -16.021 dBm M1 + DCCF : 2409.500 MHz : -16.021 dBm Duty Cycle Correction Factor : +0 dB	Limit: ≤ 8.0 dBm Margin: -24.0 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 183 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

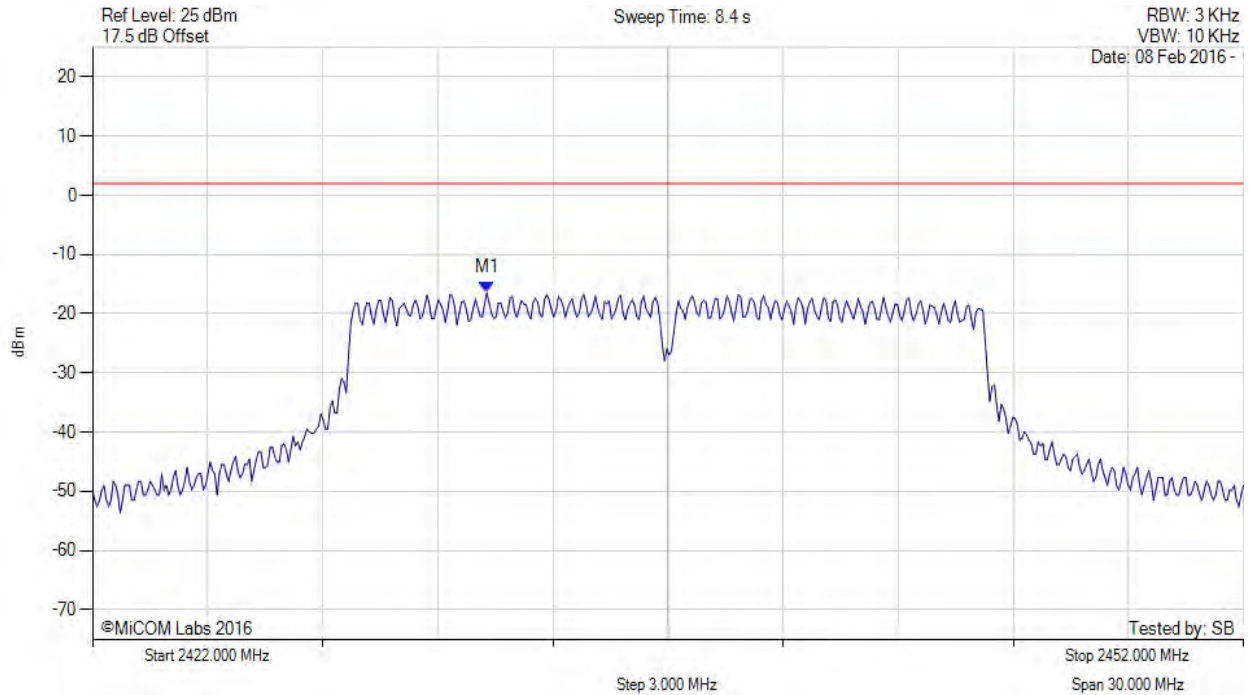

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2432.281 MHz : -16.482 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 184 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

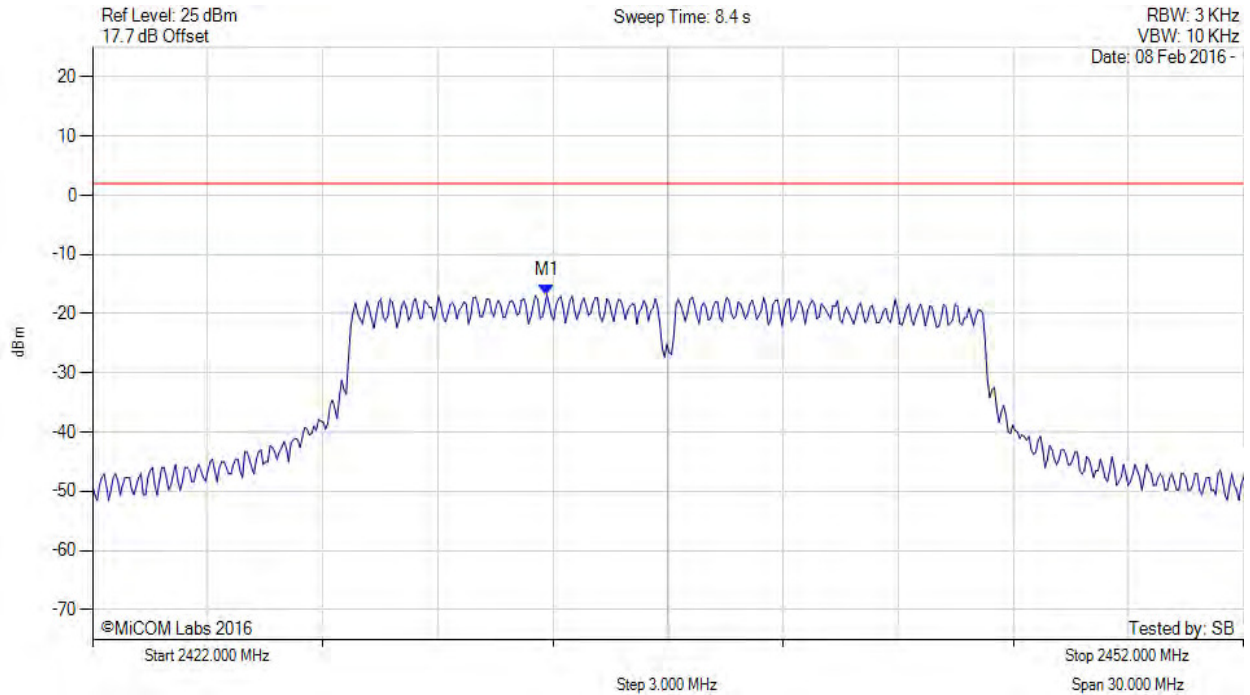

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2433.844 MHz : -16.779 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 185 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

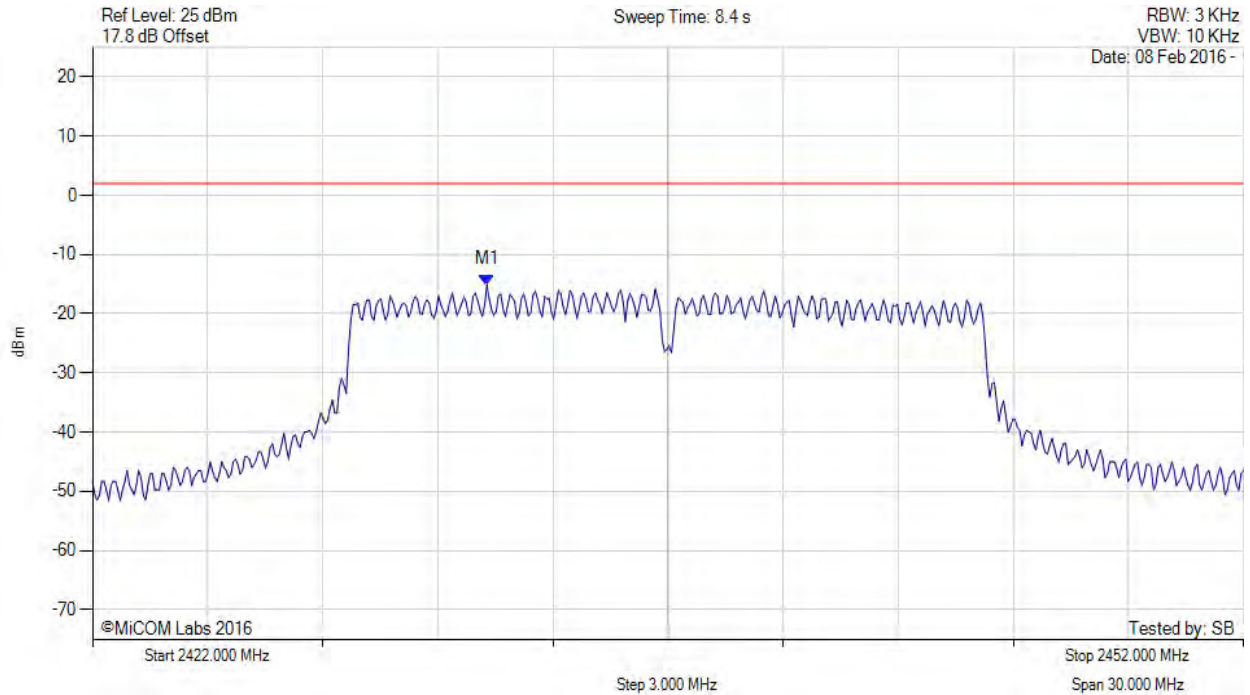

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2432.281 MHz : -15.119 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 186 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2437.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

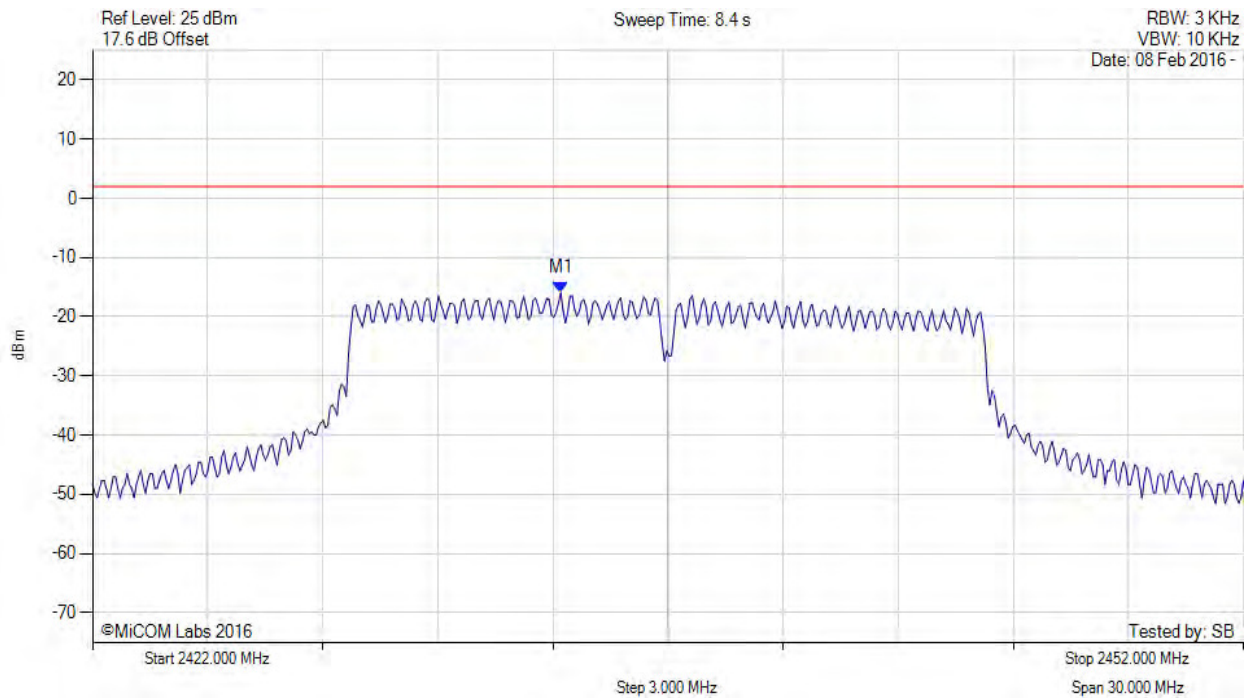

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2434.204 MHz : -15.966 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 187 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variants: 802.11g, Channel: 2437.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

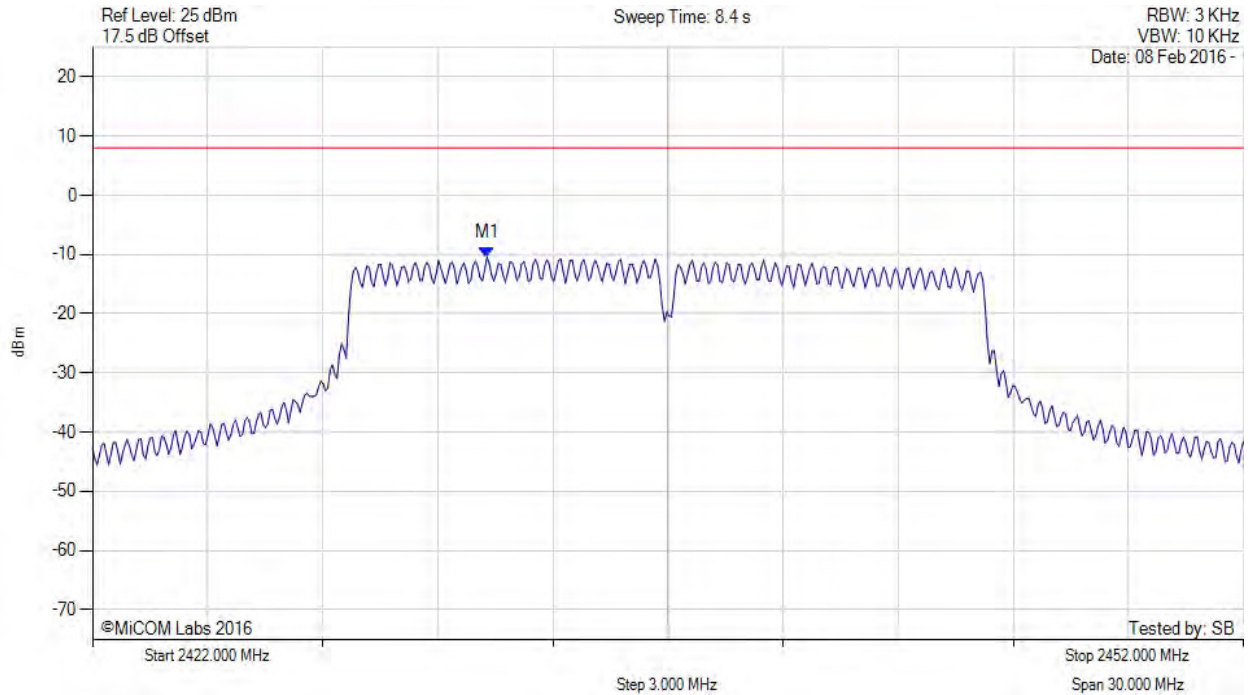

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2432.300 MHz : -10.477 dBm M1 + DCCF : 2432.300 MHz : -10.389 dBm Duty Cycle Correction Factor : +0 dB	Limit: $\leq 8.0$ dBm Margin: -18.4 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 188 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2462.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

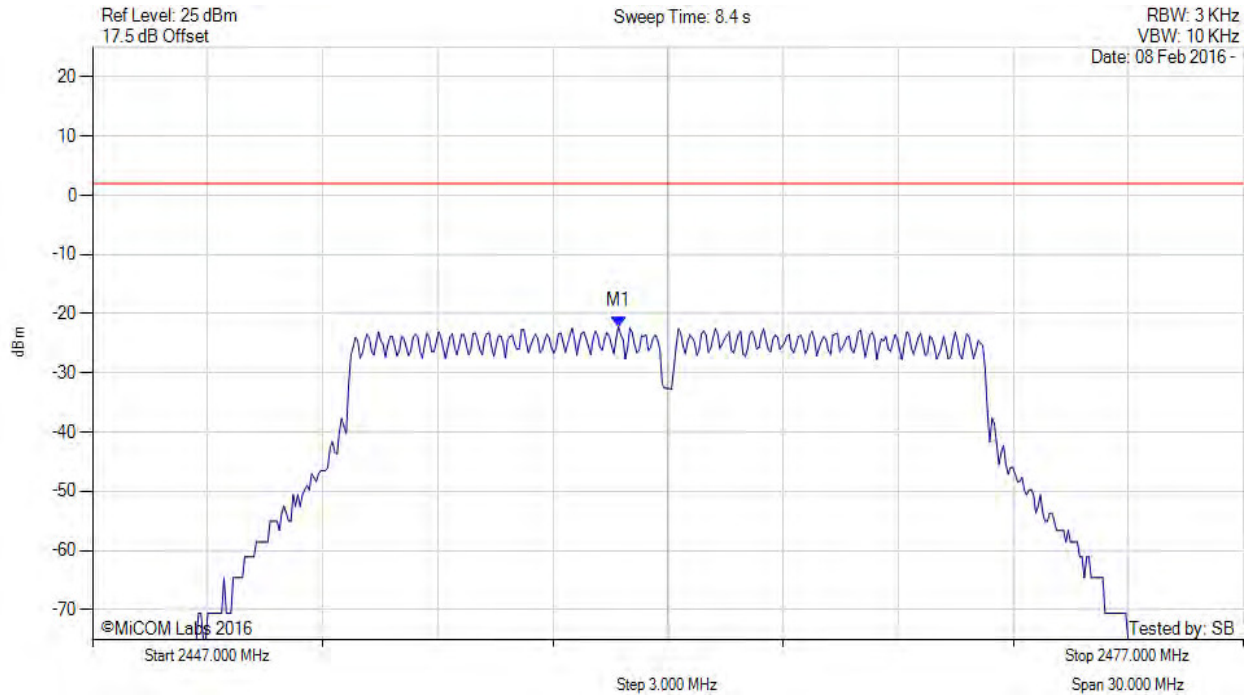

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2460.707 MHz : -22.133 dBm	Limit: $\leq 1.980$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 189 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2462.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

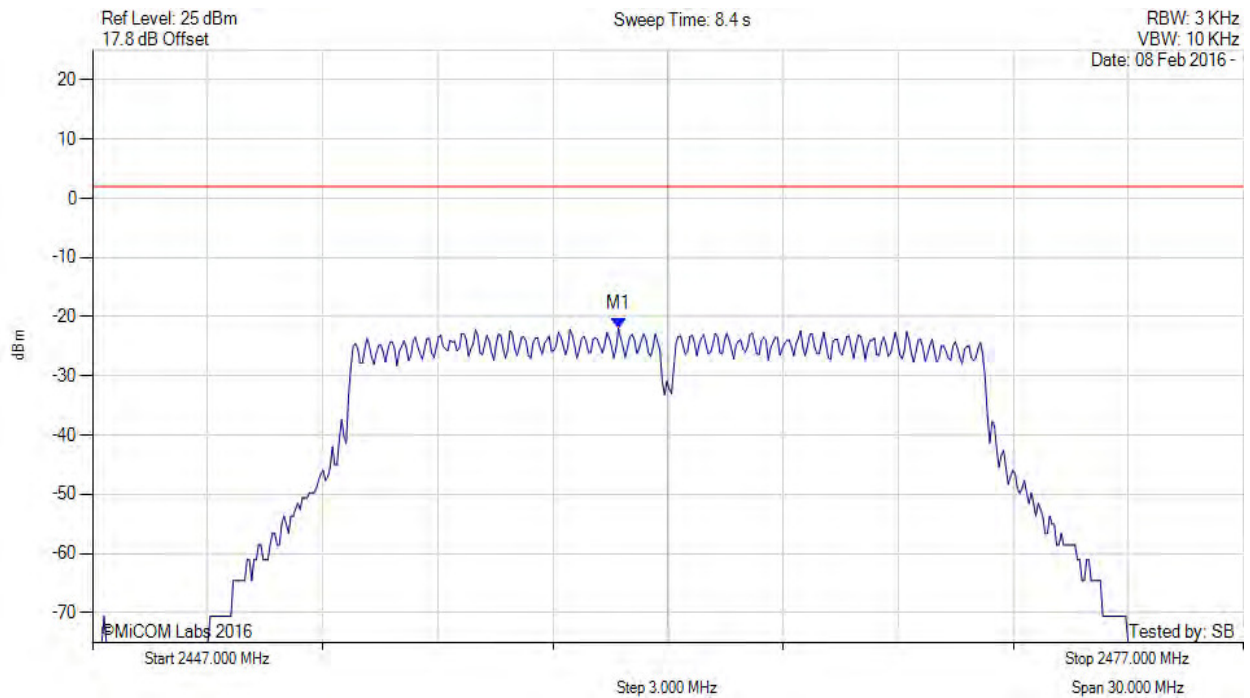

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2460.707 MHz : -22.003 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 190 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2462.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

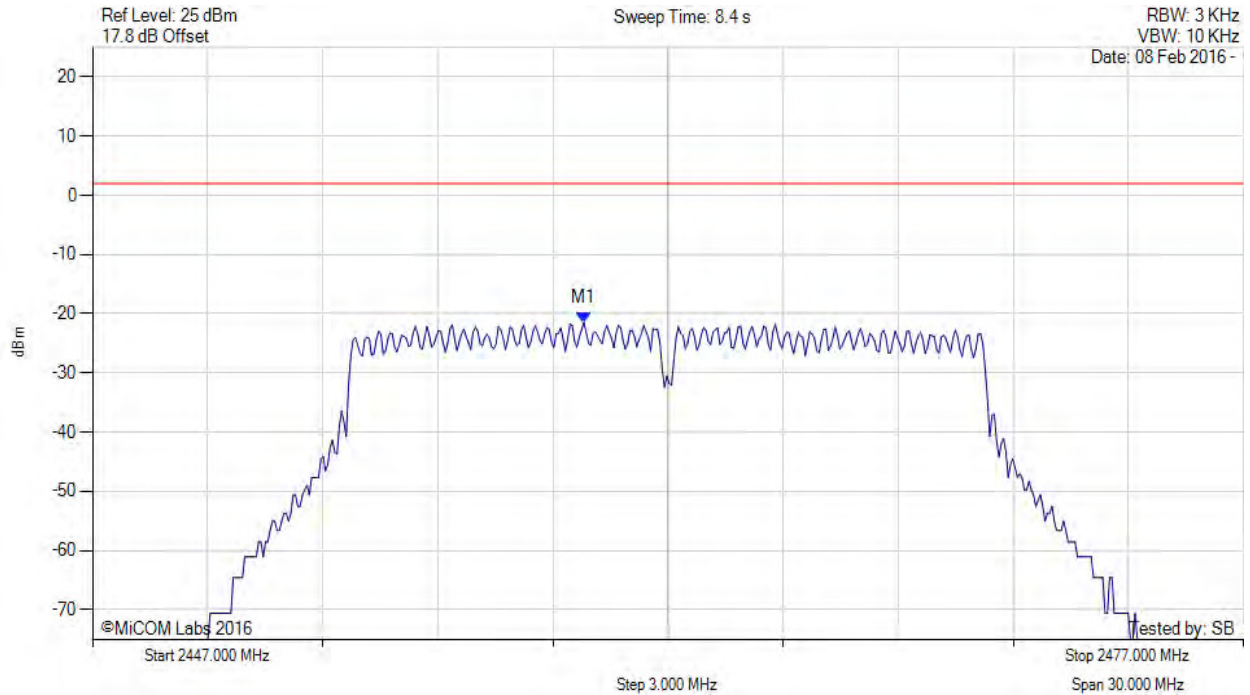

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2459.806 MHz : -21.438 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 191 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2462.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

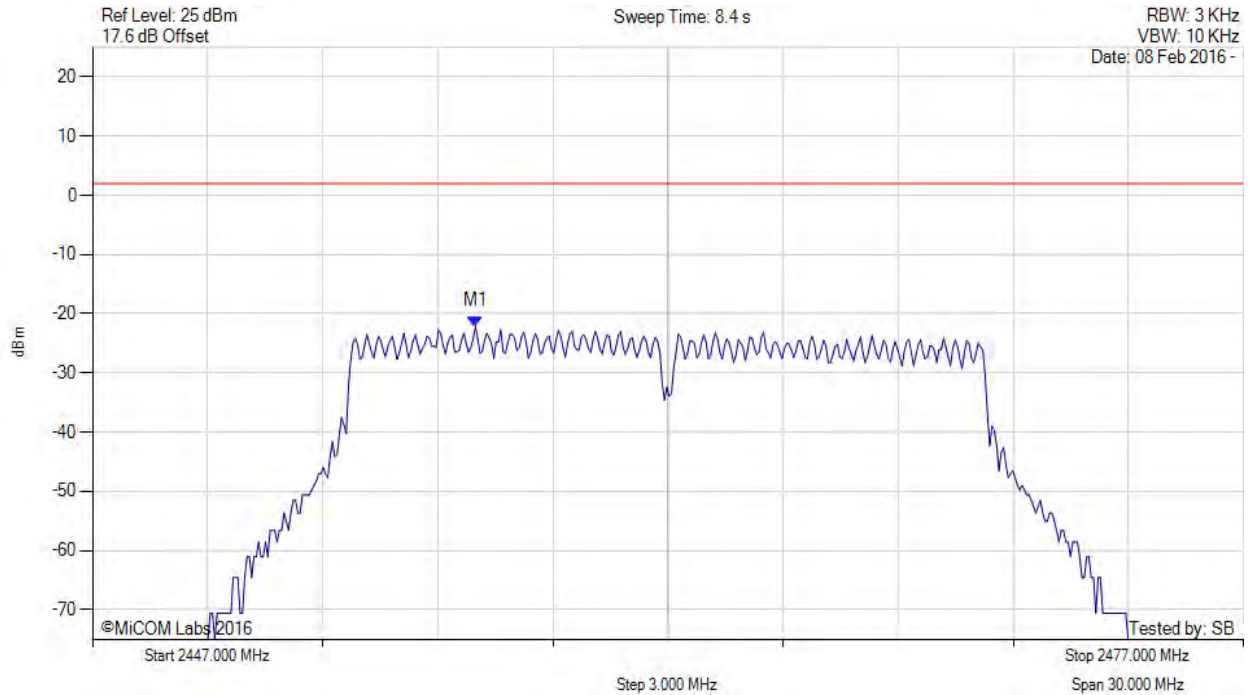

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2456.980 MHz : -22.133 dBm	Limit: $\leq 1.980$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 192 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2462.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

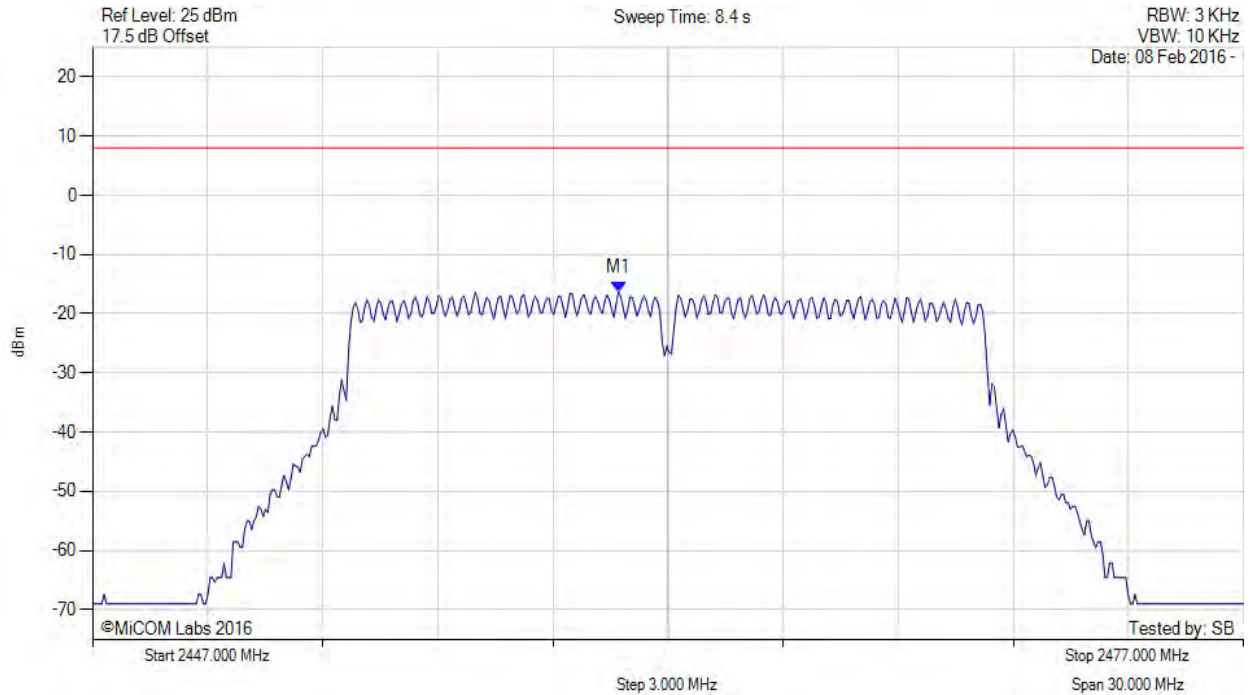

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2460.700 MHz : -16.347 dBm M1 + DCCF : 2460.700 MHz : -16.259 dBm Duty Cycle Correction Factor : +0 dB	Limit: ≤ 8.0 dBm Margin: -24.3 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 193 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

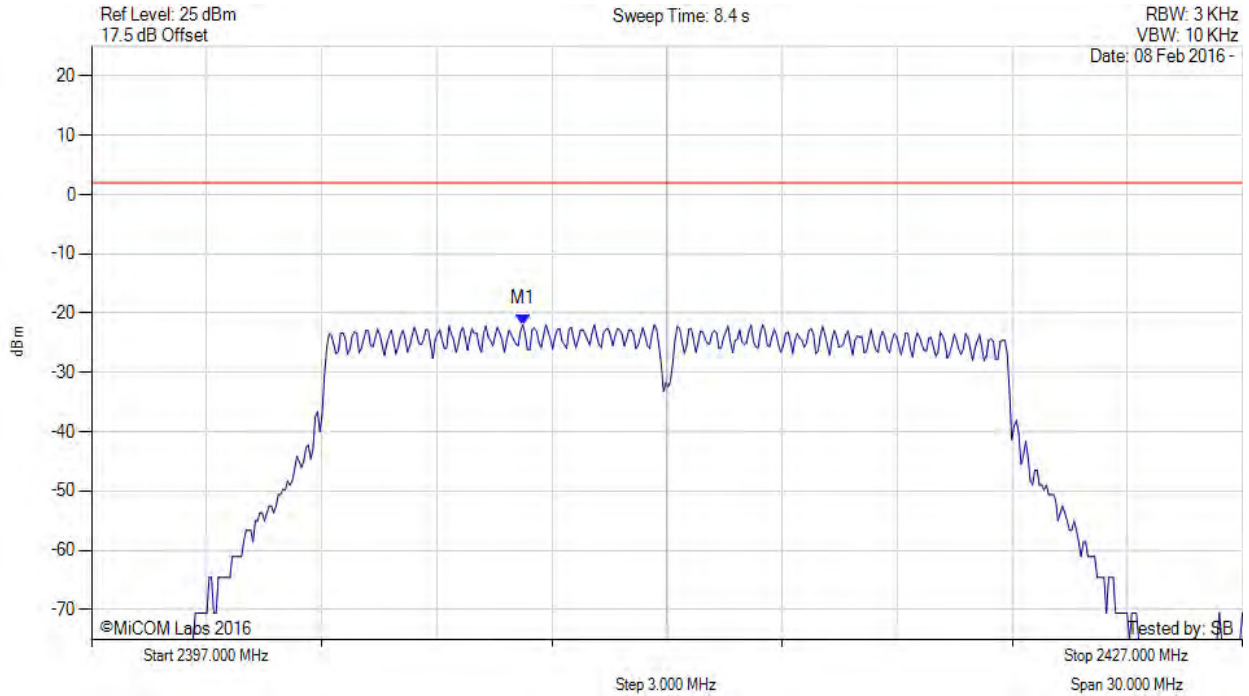

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2408.242 MHz : -21.874 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 194 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

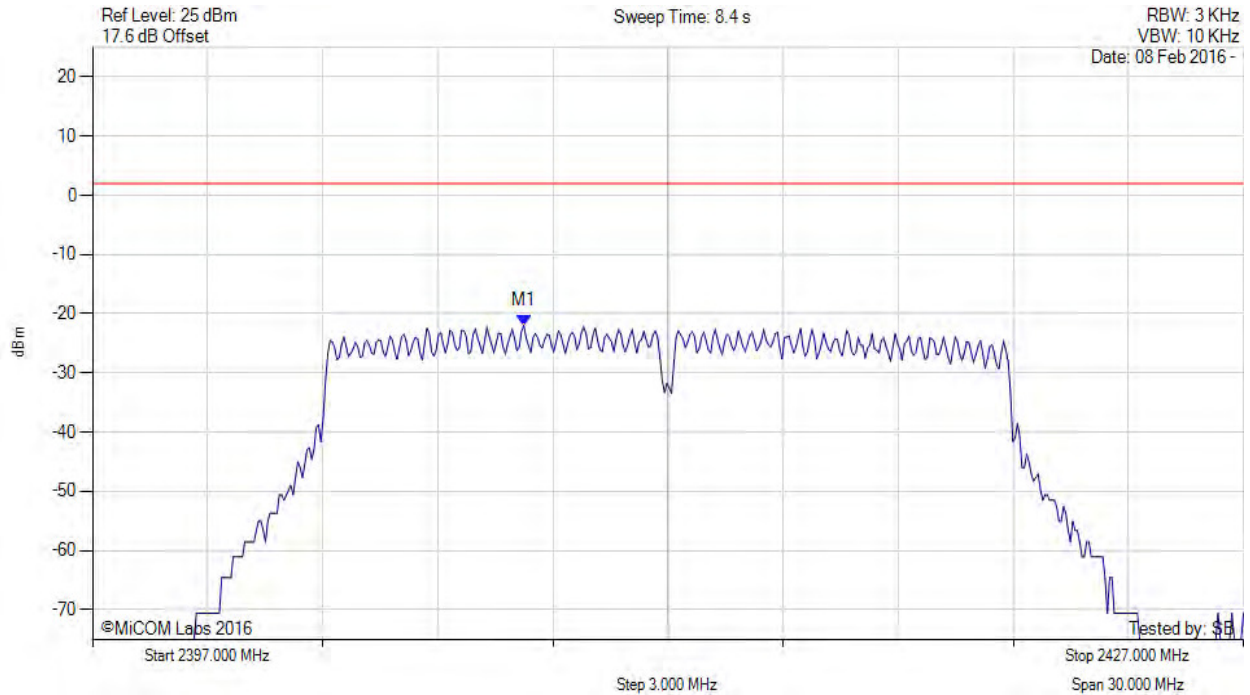

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2408.242 MHz : -21.938 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 195 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

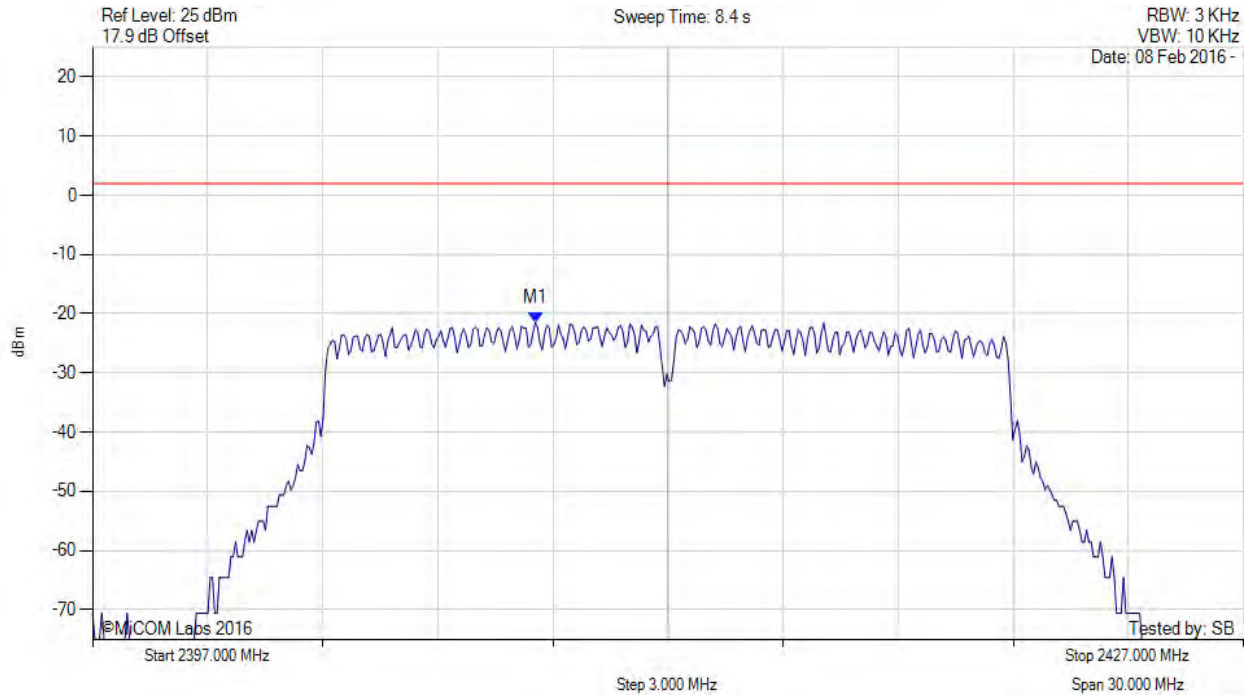

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2408.543 MHz : -21.530 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 196 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

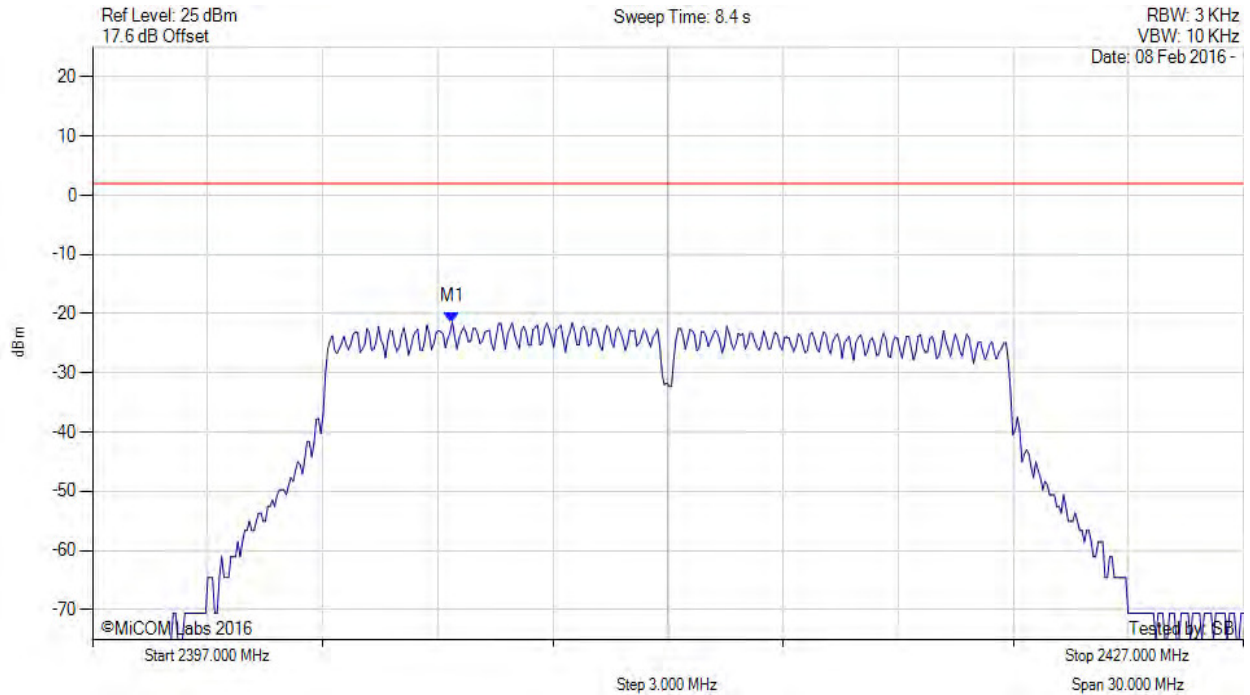

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2406.379 MHz : -21.408 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 197 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2412.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

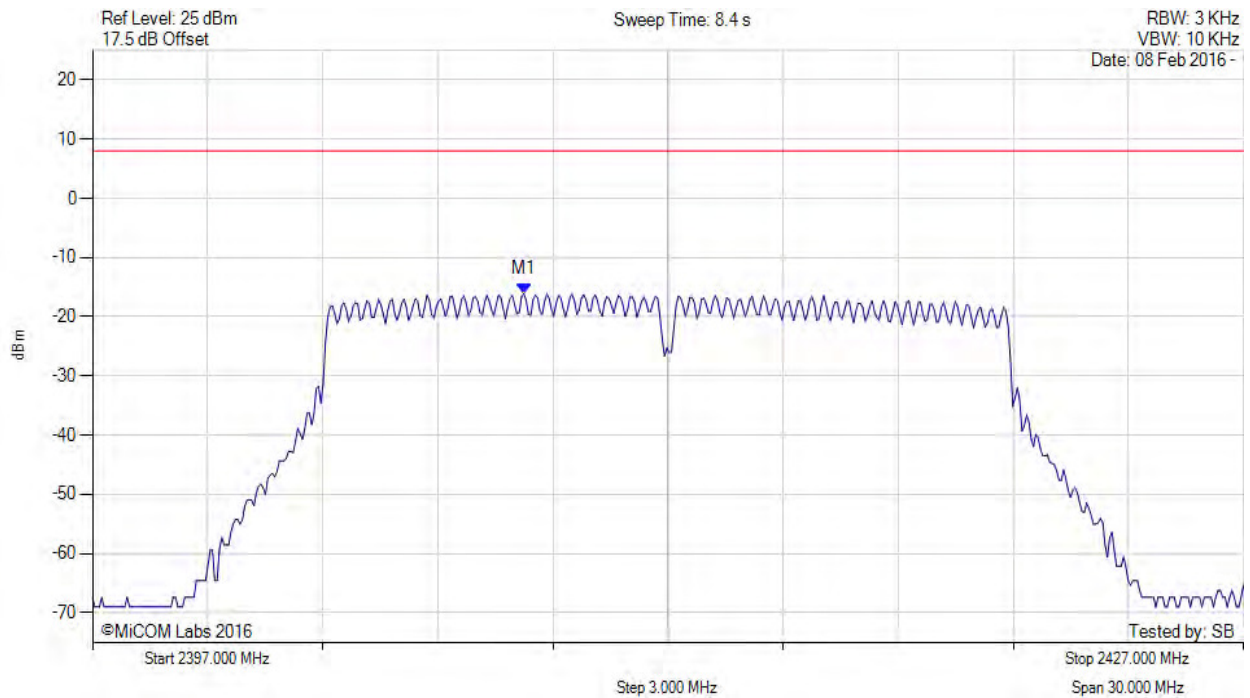

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2408.200 MHz : -16.069 dBm M1 + DCCF : 2408.200 MHz : -16.025 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -24.0 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 198 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

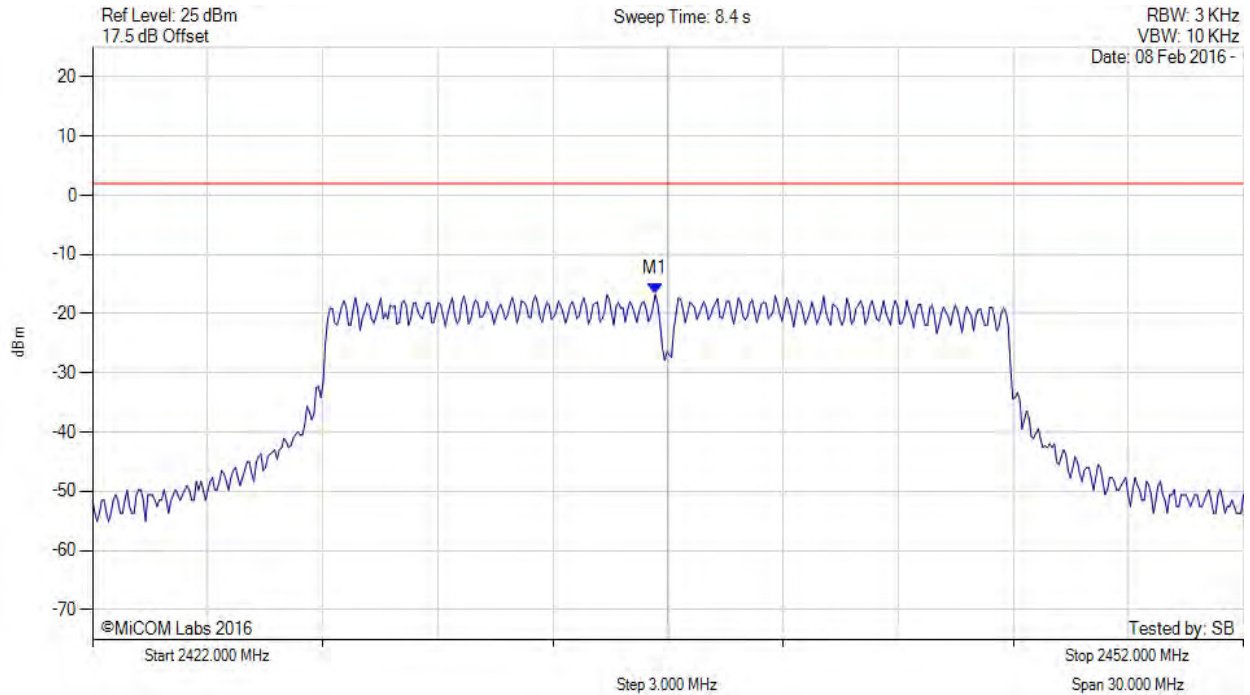

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2436.669 MHz : -16.673 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 199 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

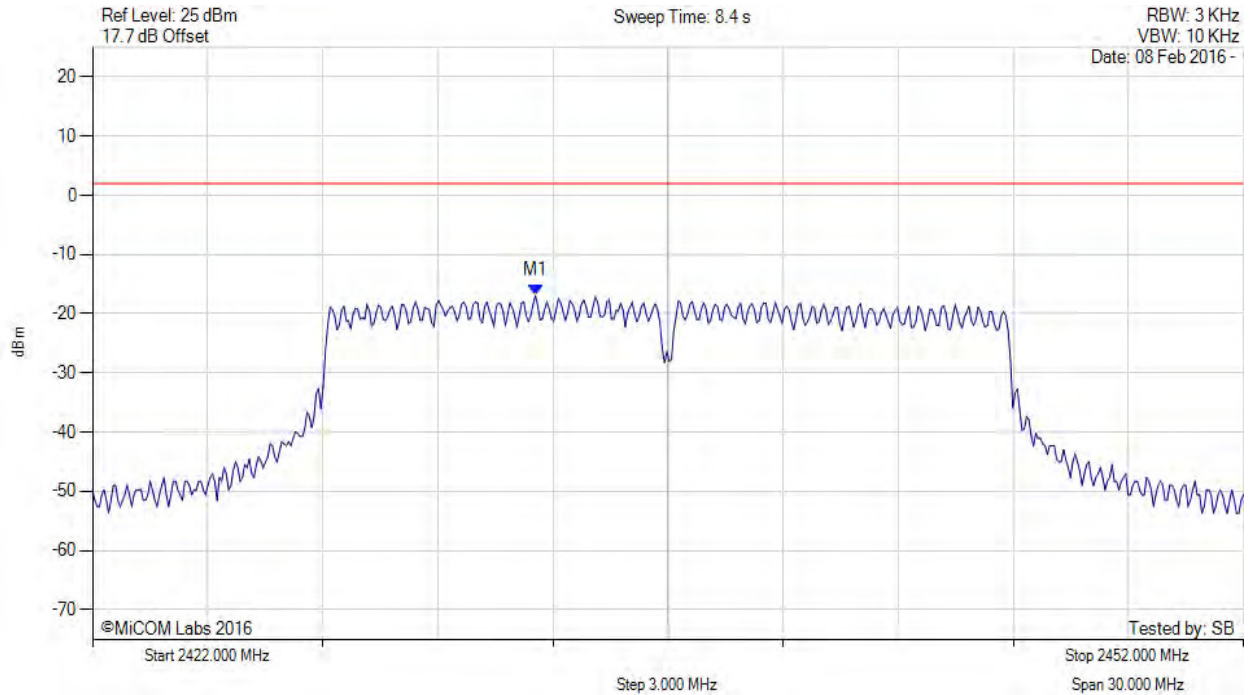

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2433.543 MHz : -16.941 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 200 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

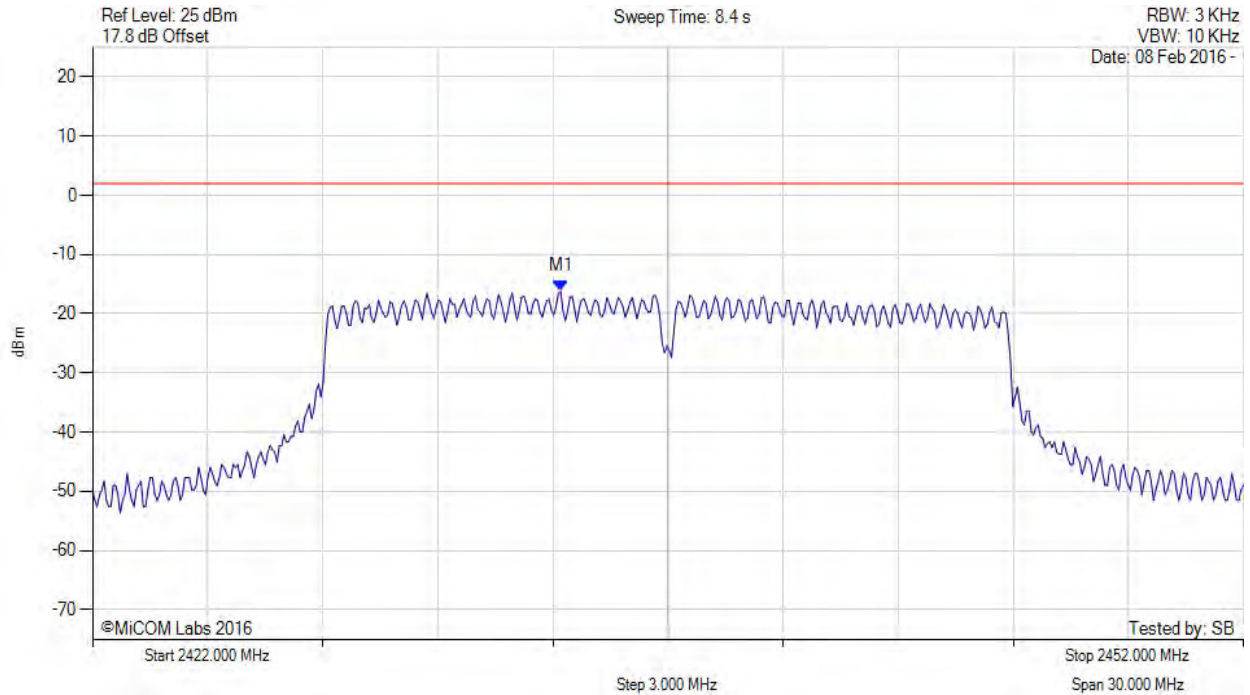

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2434.204 MHz : -16.229 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 201 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

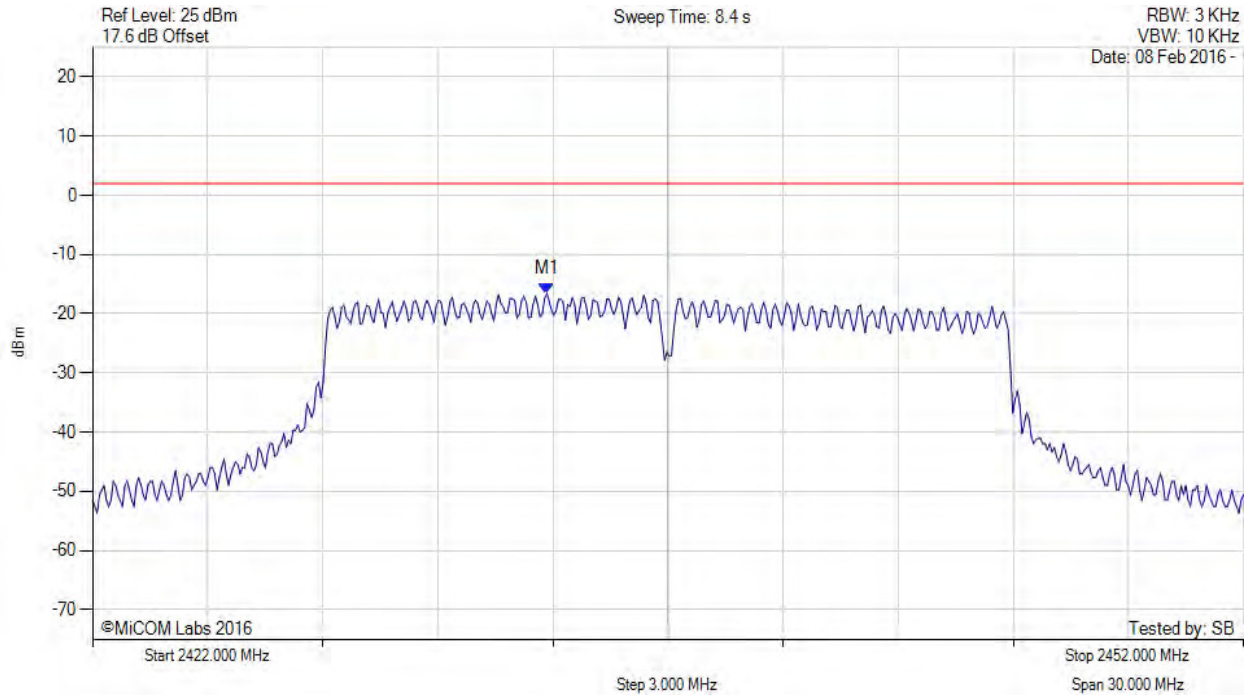

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2433.844 MHz : -16.603 dBm	Limit: $\leq 1.980$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 202 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variat: 802.11n HT-20, Channel: 2437.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

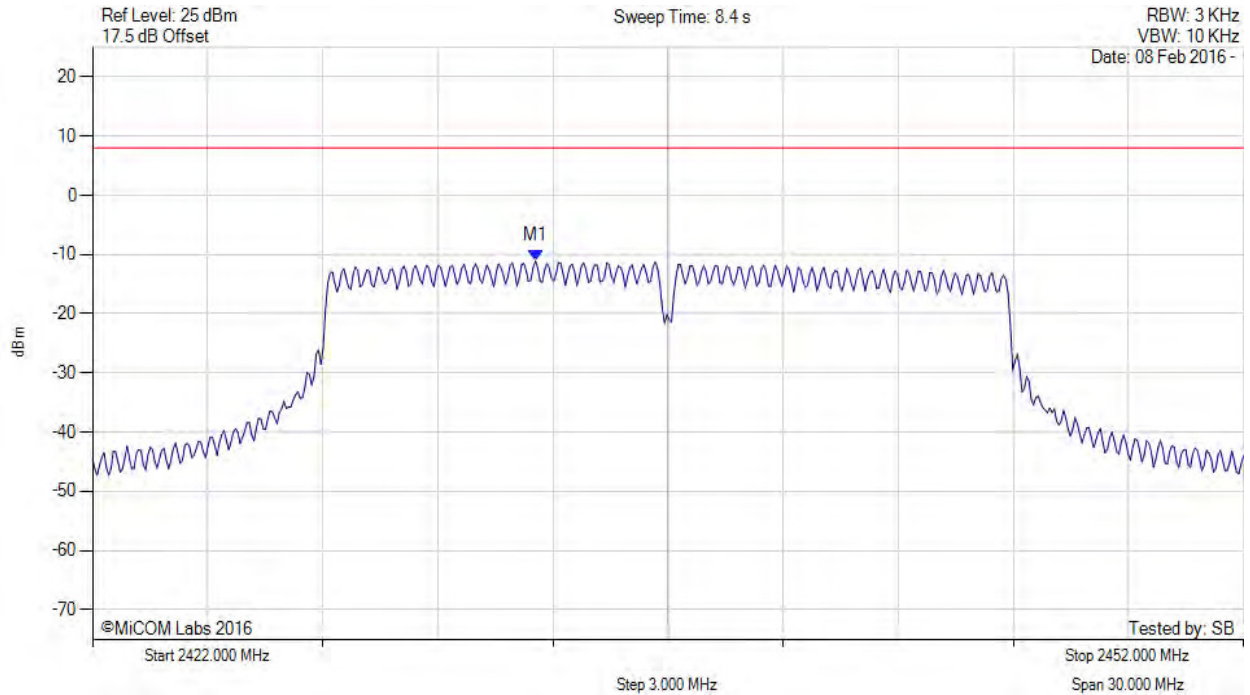

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2433.500 MHz : -11.072 dBm M1 + DCCF : 2433.500 MHz : -11.028 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -19.0 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 203 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

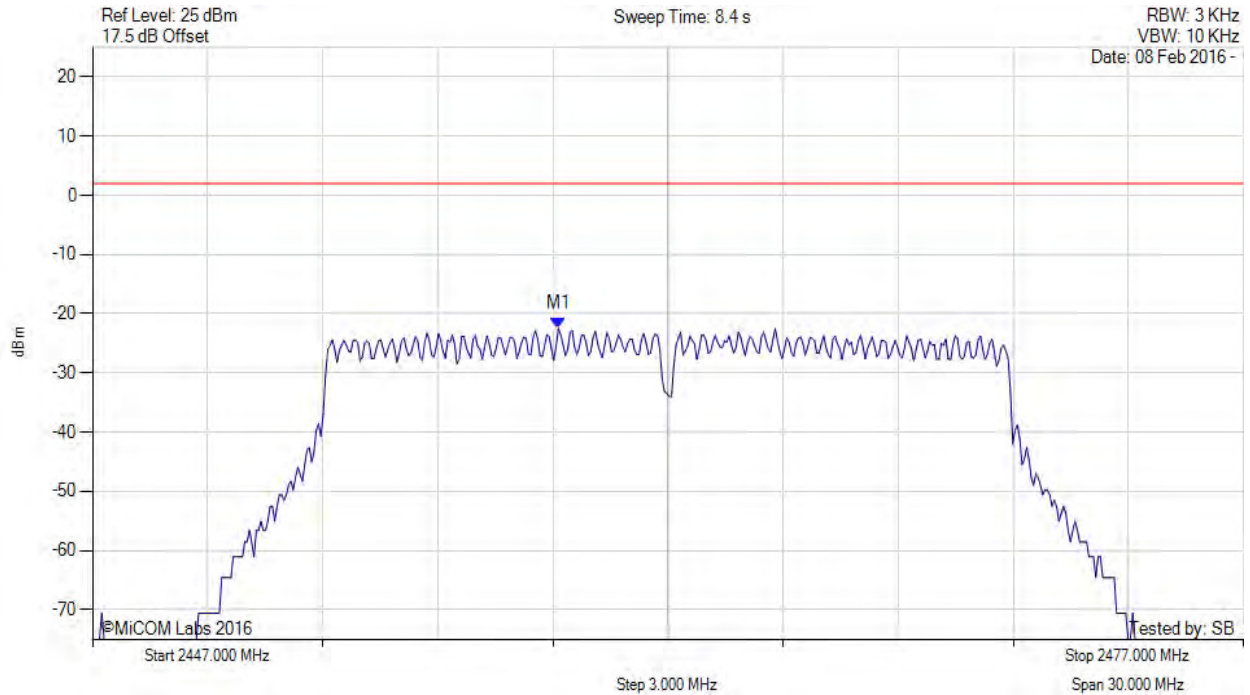

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2459.144 MHz : -22.503 dBm	Limit: $\leq 1.980$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 204 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

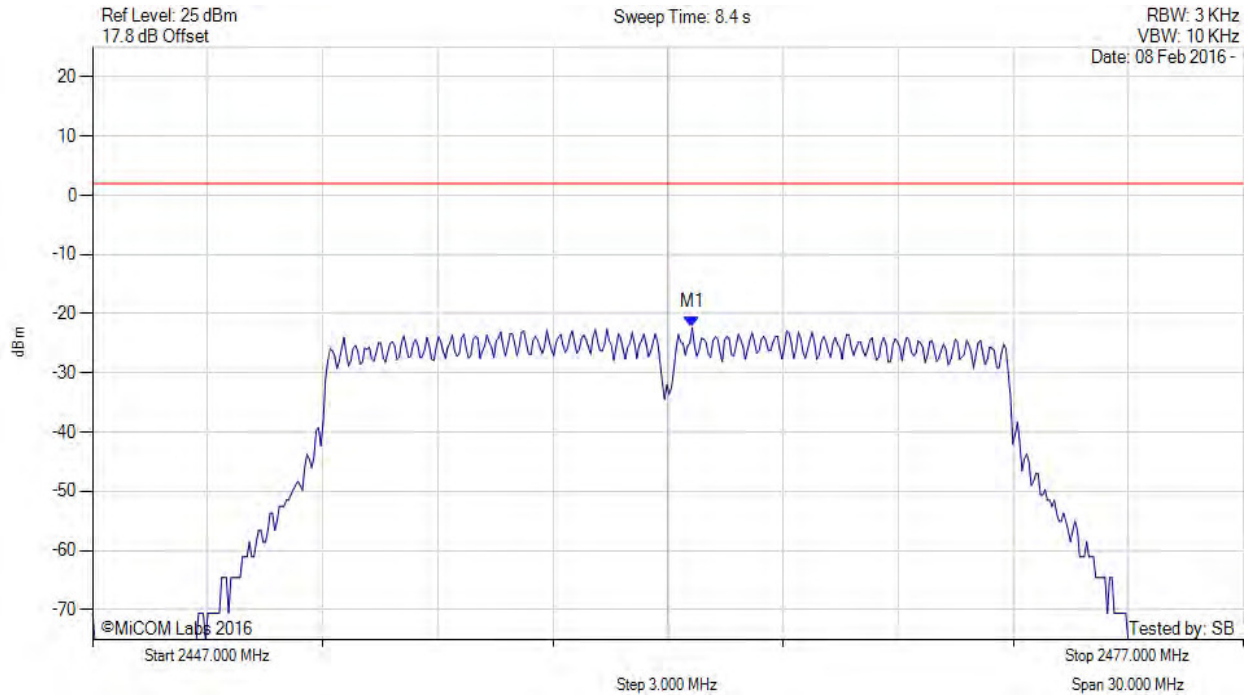

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2462.631 MHz : -22.333 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 205 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

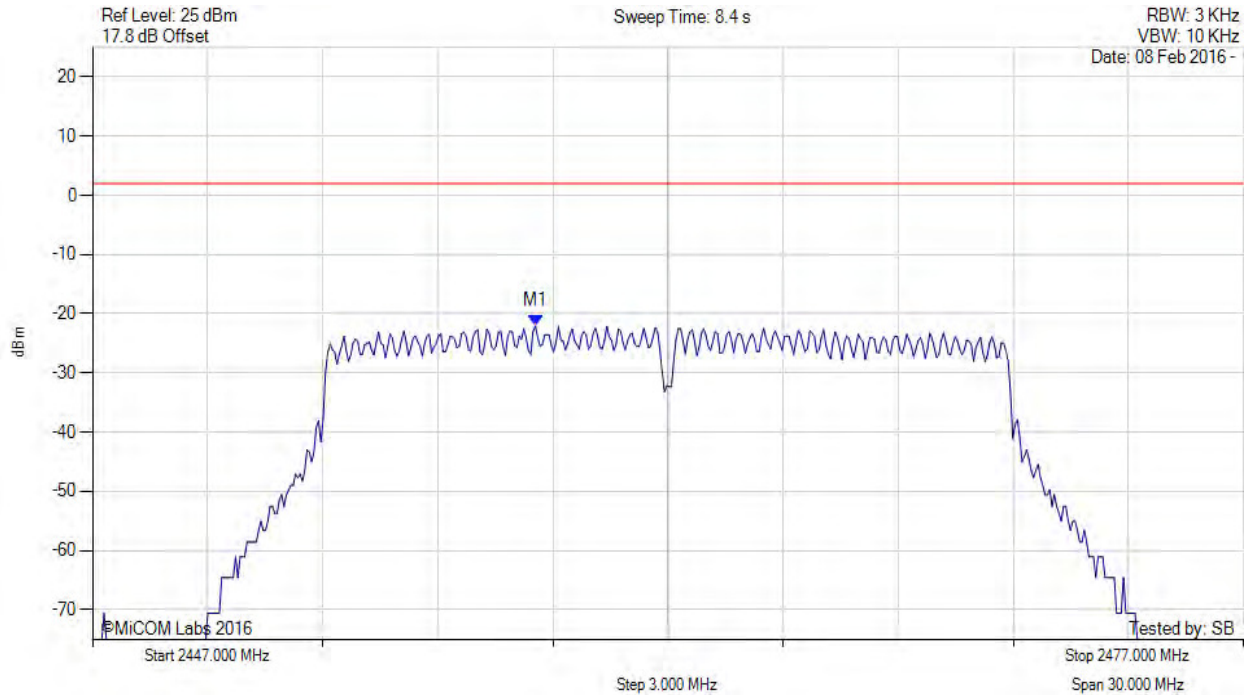

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2458.543 MHz : -22.035 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 206 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

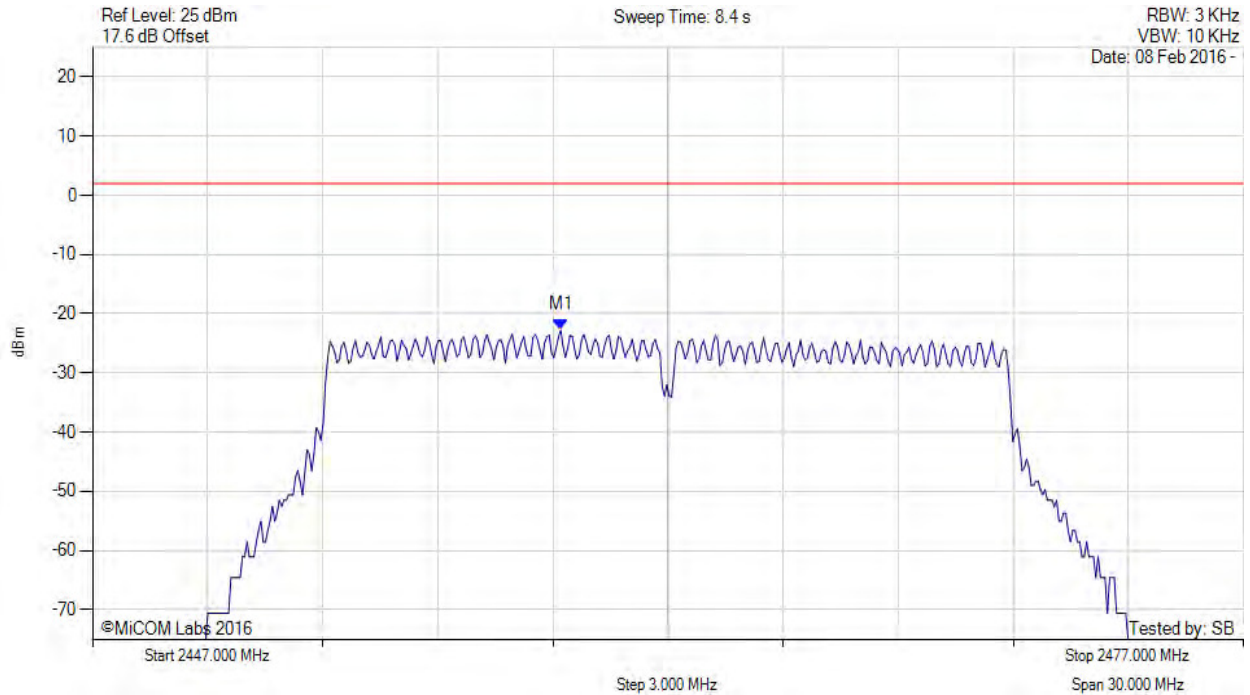

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2459.204 MHz : -22.782 dBm	Limit: $\leq 1.980$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 207 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variante: 802.11n HT-20, Channel: 2462.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

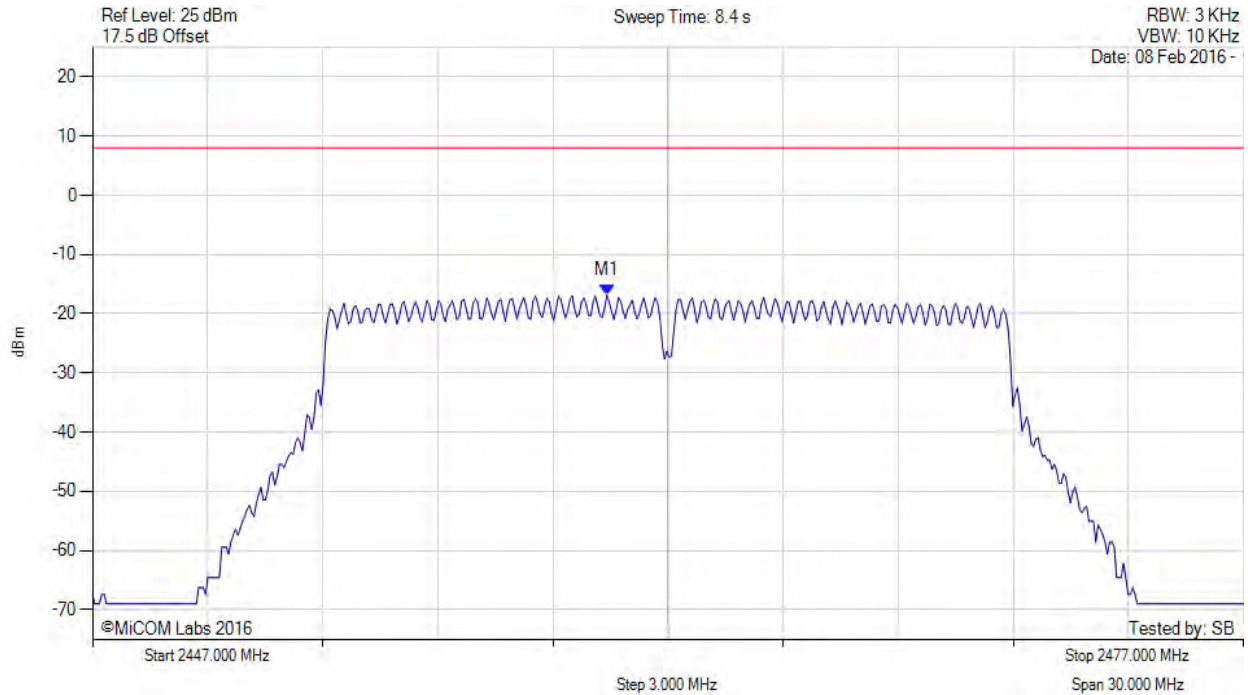

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2460.400 MHz : -16.903 dBm M1 + DCCF : 2460.400 MHz : -16.859 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: $\leq 8.0$ dBm Margin: $-24.9$ dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 208 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

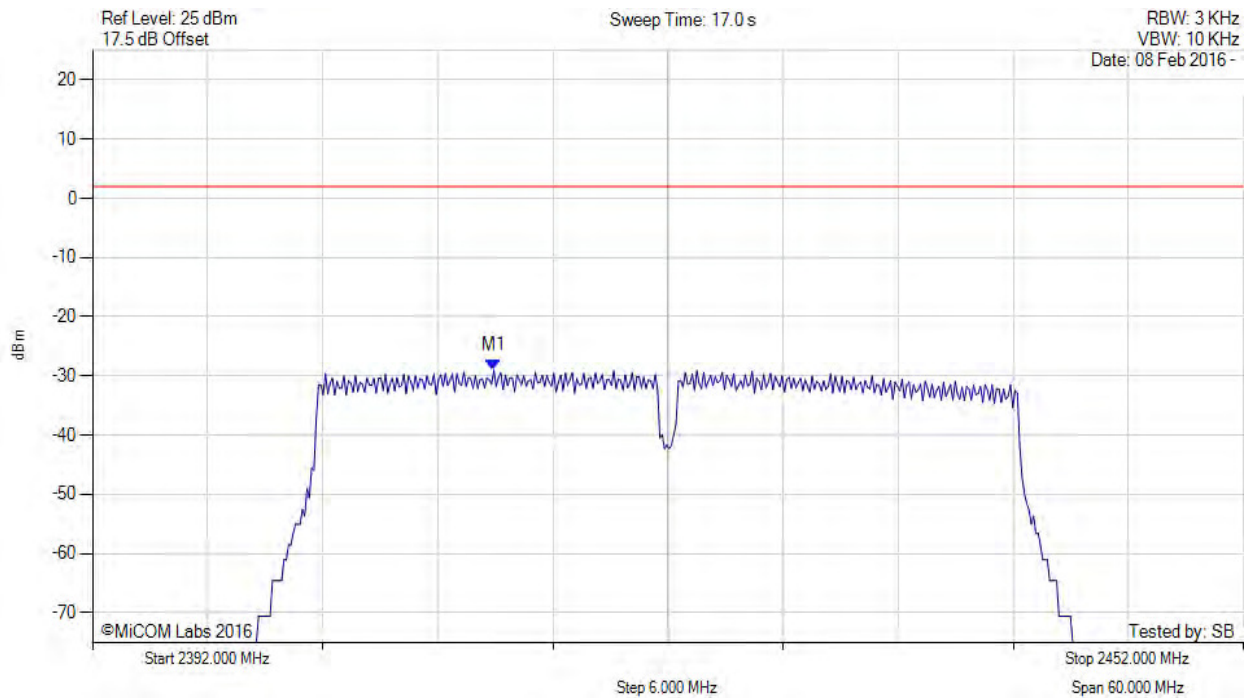

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2412.922 MHz : -29.054 dBm	Limit: $\leq 1.980$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 209 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

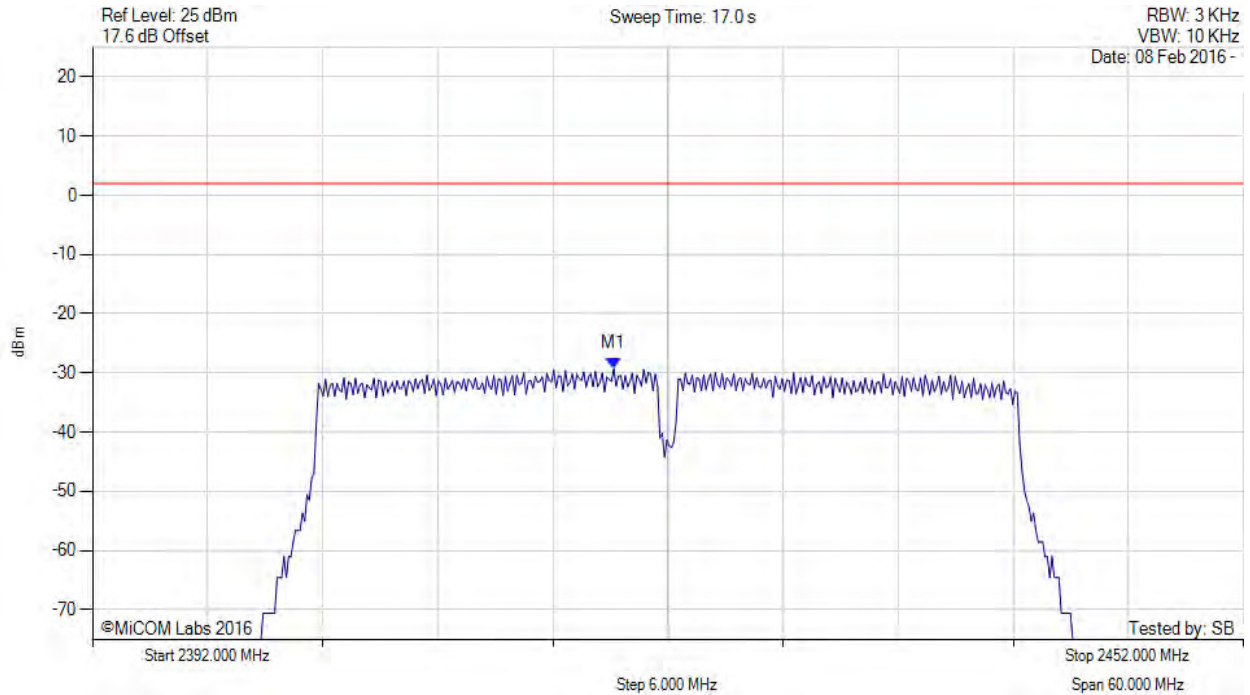

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2419.174 MHz : -29.276 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 210 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

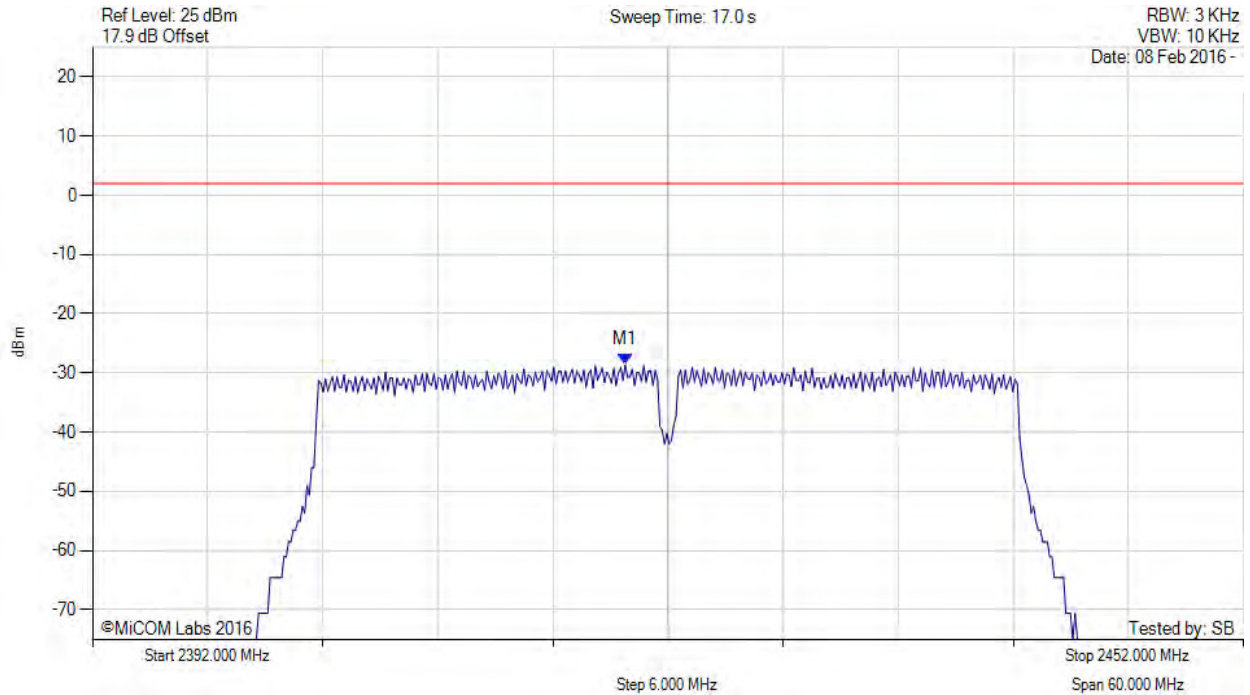

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2419.776 MHz : -28.627 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 211 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

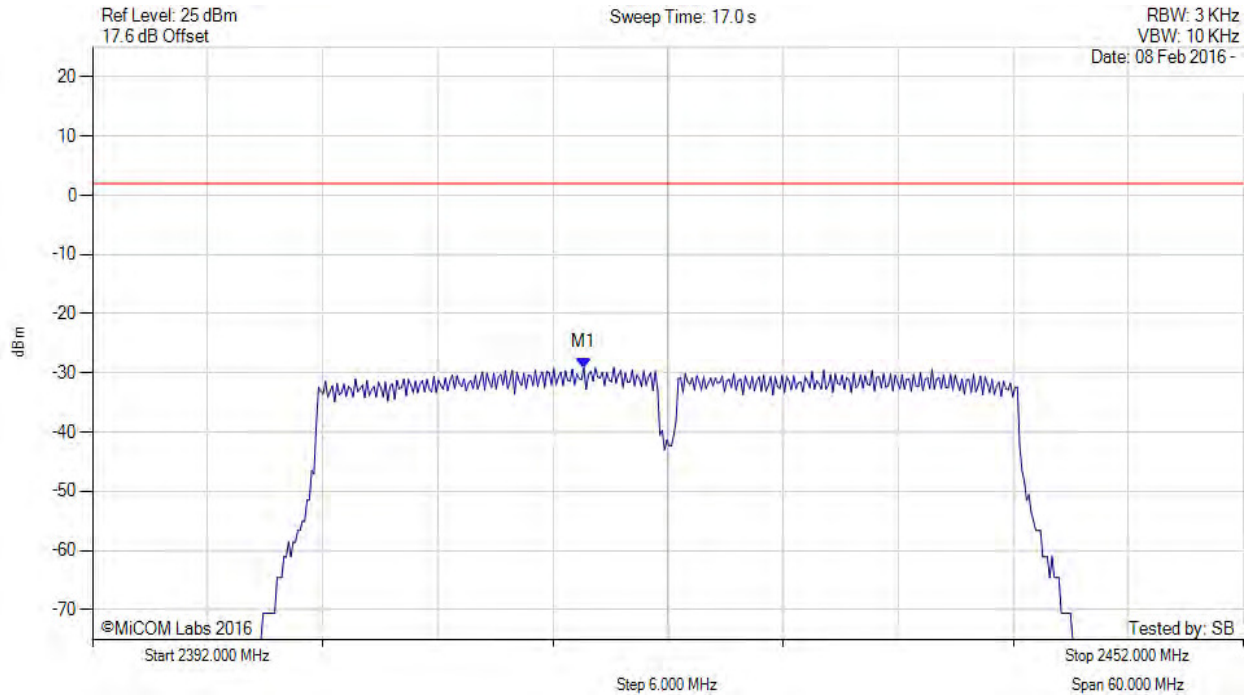

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2417.611 MHz : -29.128 dBm	Limit: $\leq 1.980$ dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 212 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variat: 802.11n HT-40, Channel: 2422.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

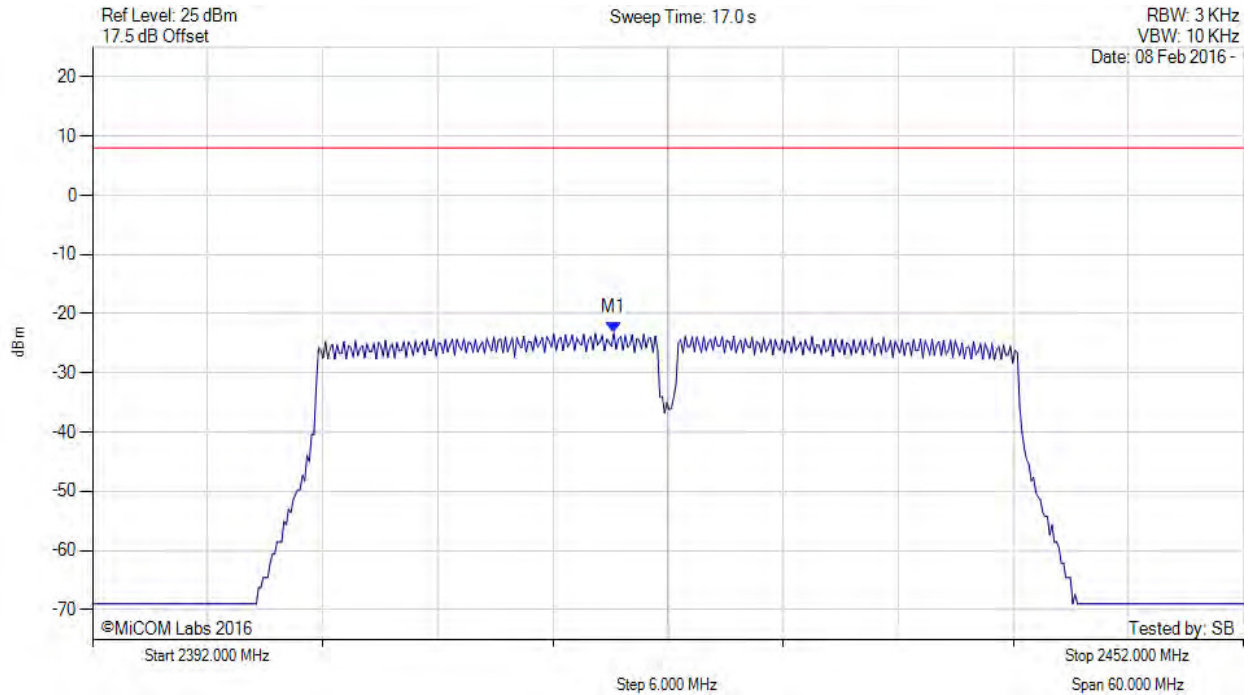

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2419.200 MHz : -23.181 dBm M1 + DCCF : 2419.200 MHz : -23.049 dBm Duty Cycle Correction Factor : +0.13 dB	Limit: ≤ 8.0 dBm Margin: -31.1 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 213 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

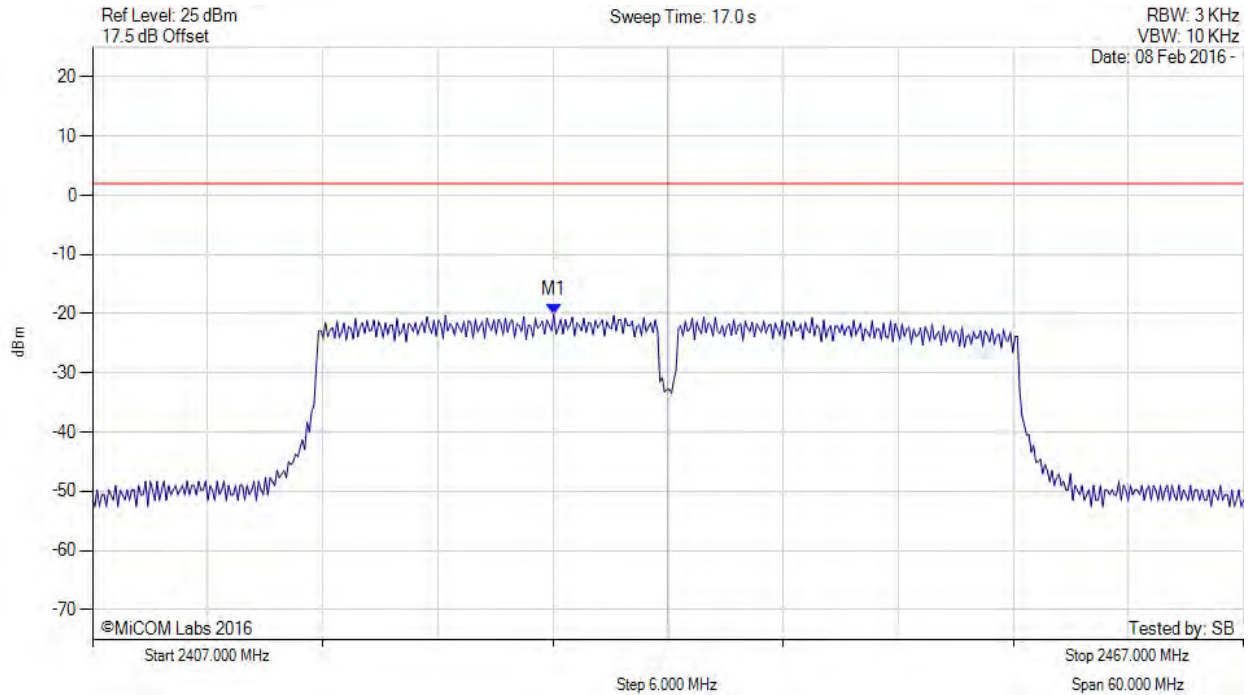

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2431.048 MHz : -20.116 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 214 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

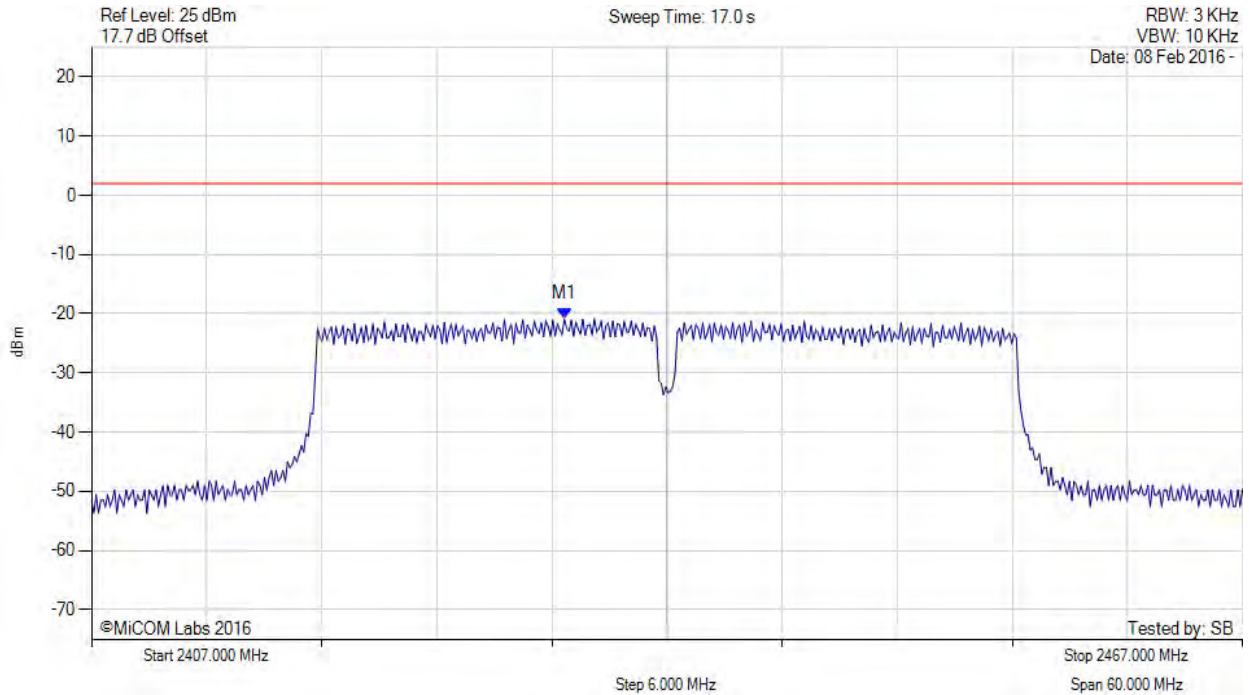

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2431.649 MHz : -20.851 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 215 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

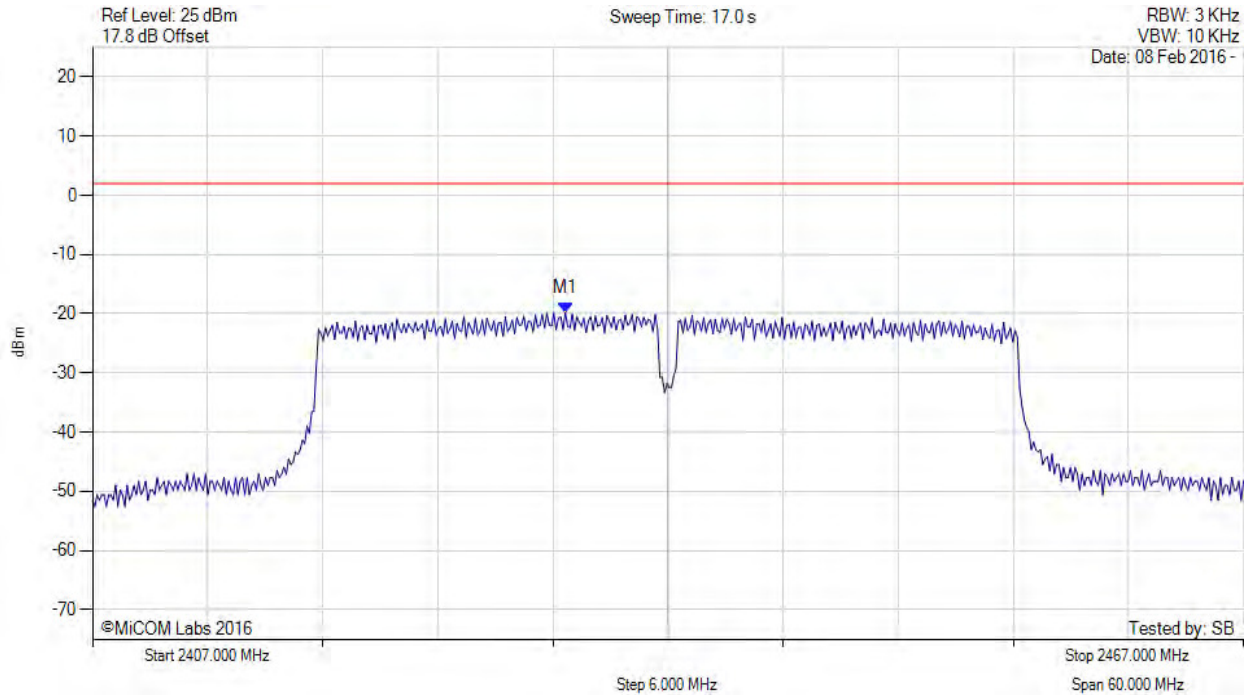

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2431.649 MHz : -19.834 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 216 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

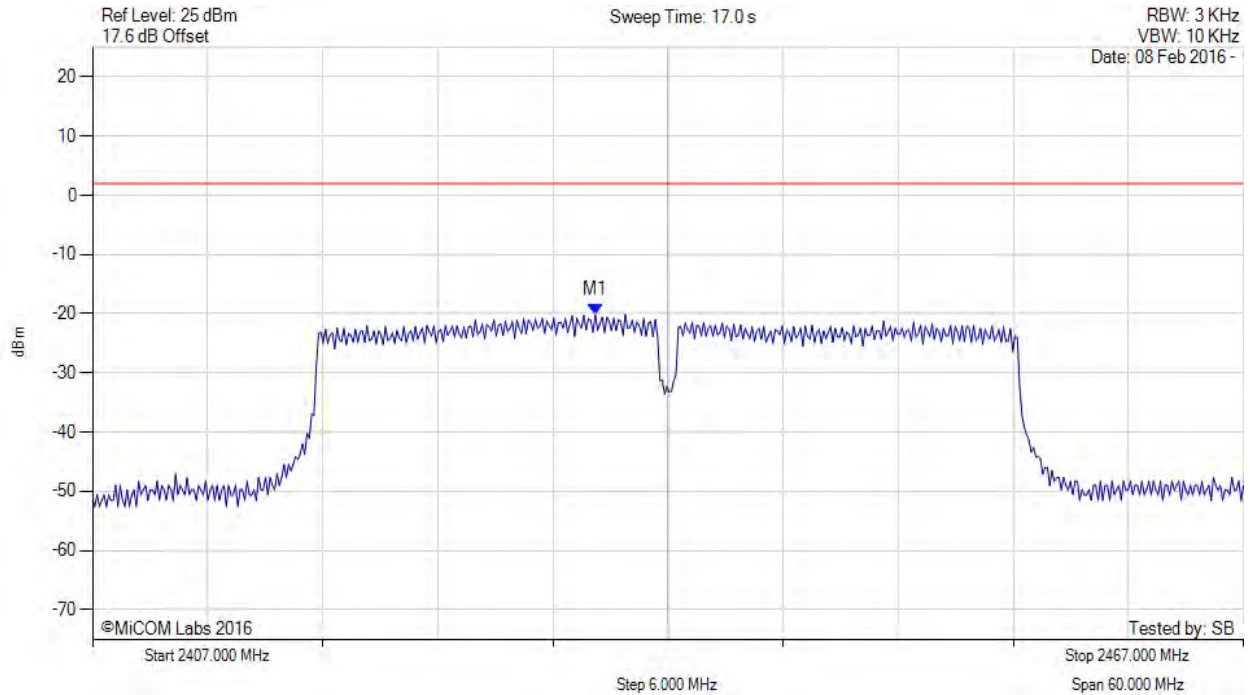

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2433.212 MHz : -20.143 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.






**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 217 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2437.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

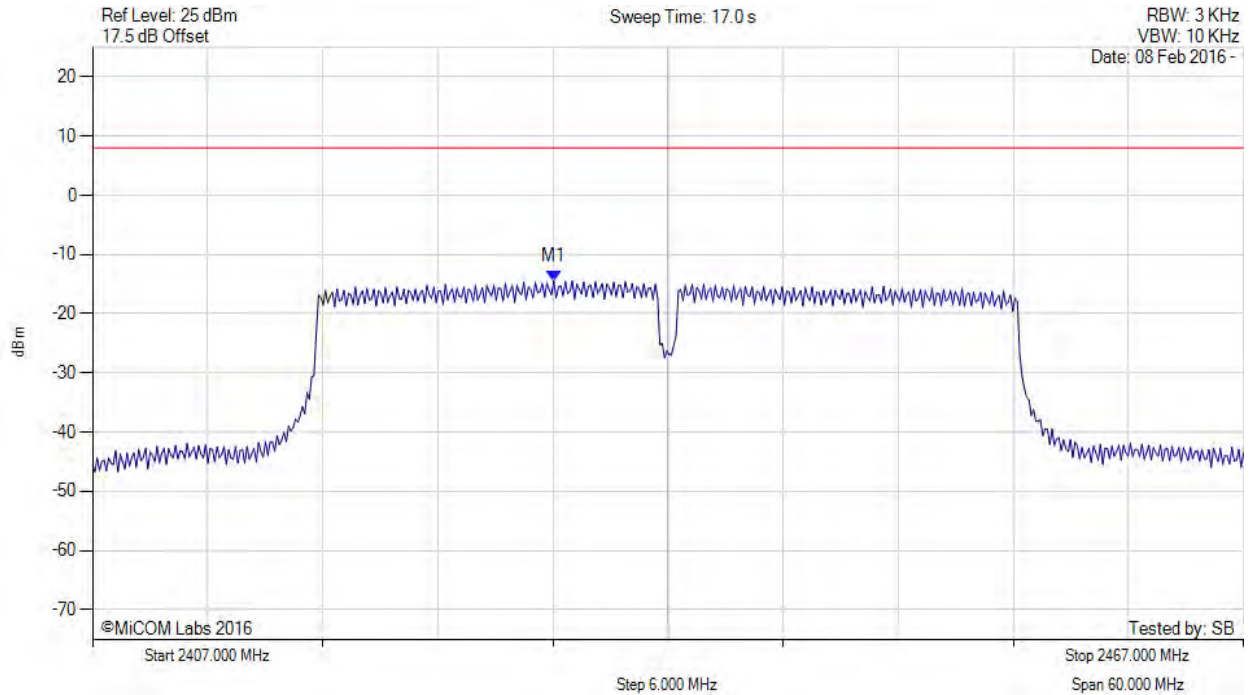

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2431.000 MHz : -14.427 dBm M1 + DCCF : 2431.000 MHz : -14.295 dBm Duty Cycle Correction Factor : +0.13 dB	Limit: $\leq 8.0$ dBm Margin: -22.3 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 218 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain a, Temp: Ambient, Voltage: 48 Vdc

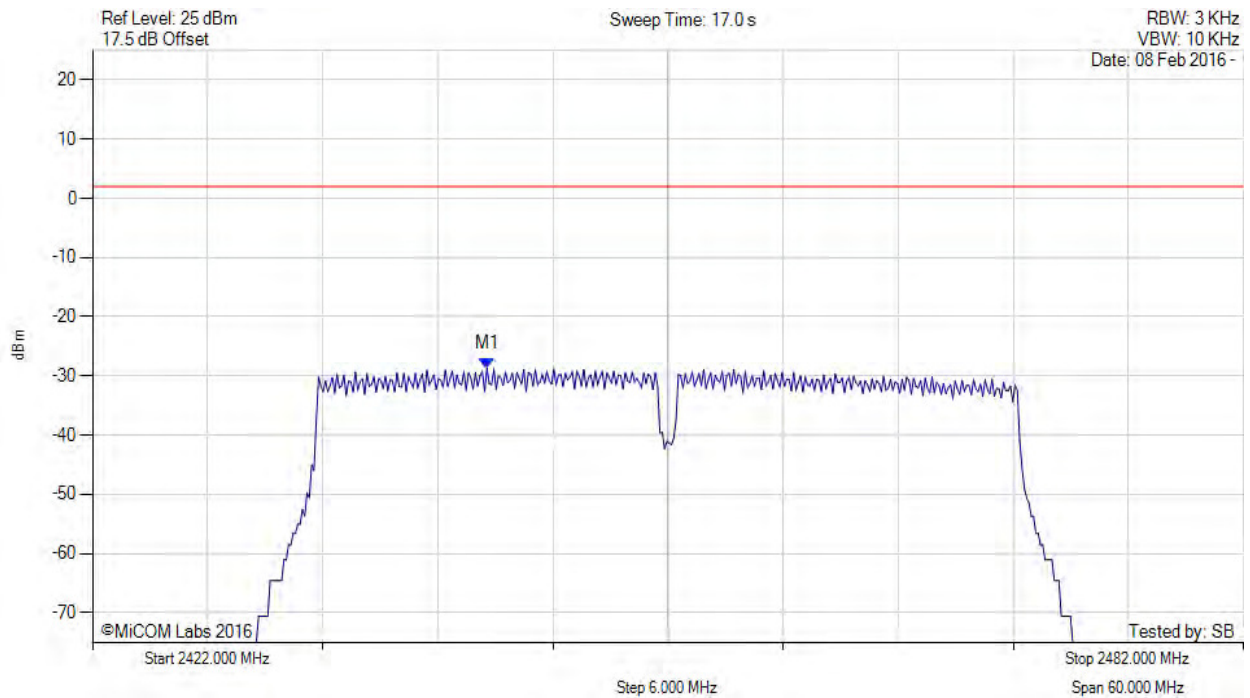

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2442.561 MHz : -28.697 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 219 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain b, Temp: Ambient, Voltage: 48 Vdc

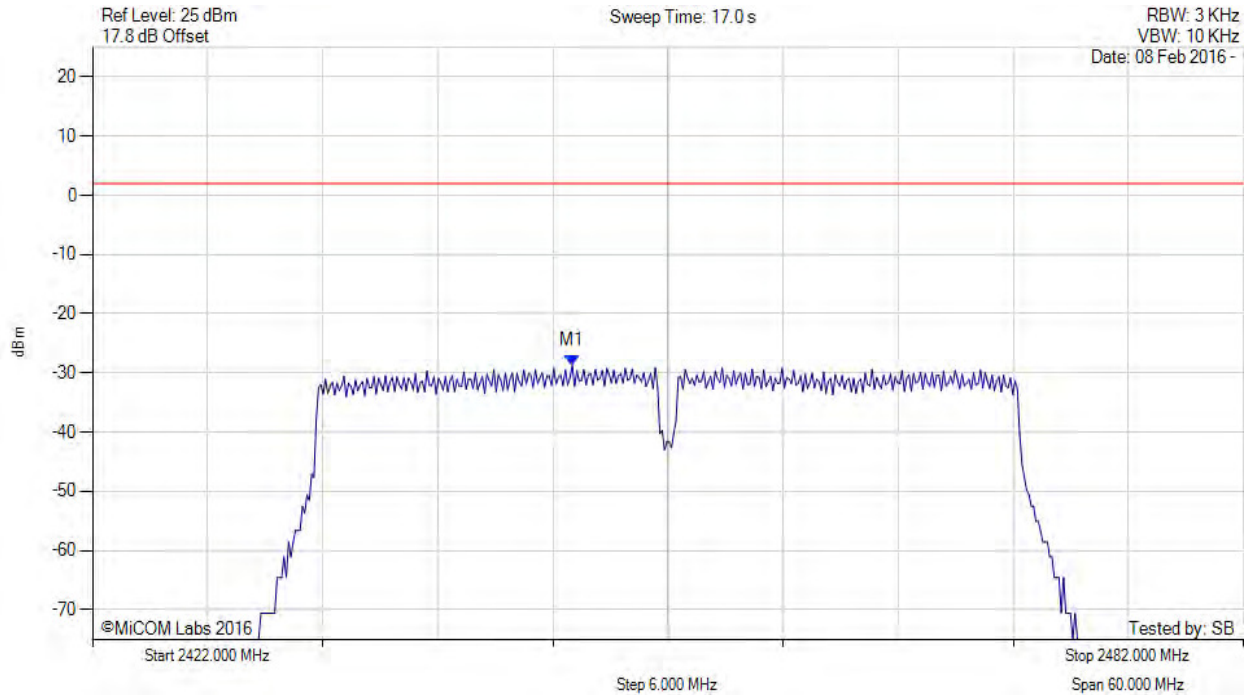

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2447.010 MHz : -28.697 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 220 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain c, Temp: Ambient, Voltage: 48 Vdc

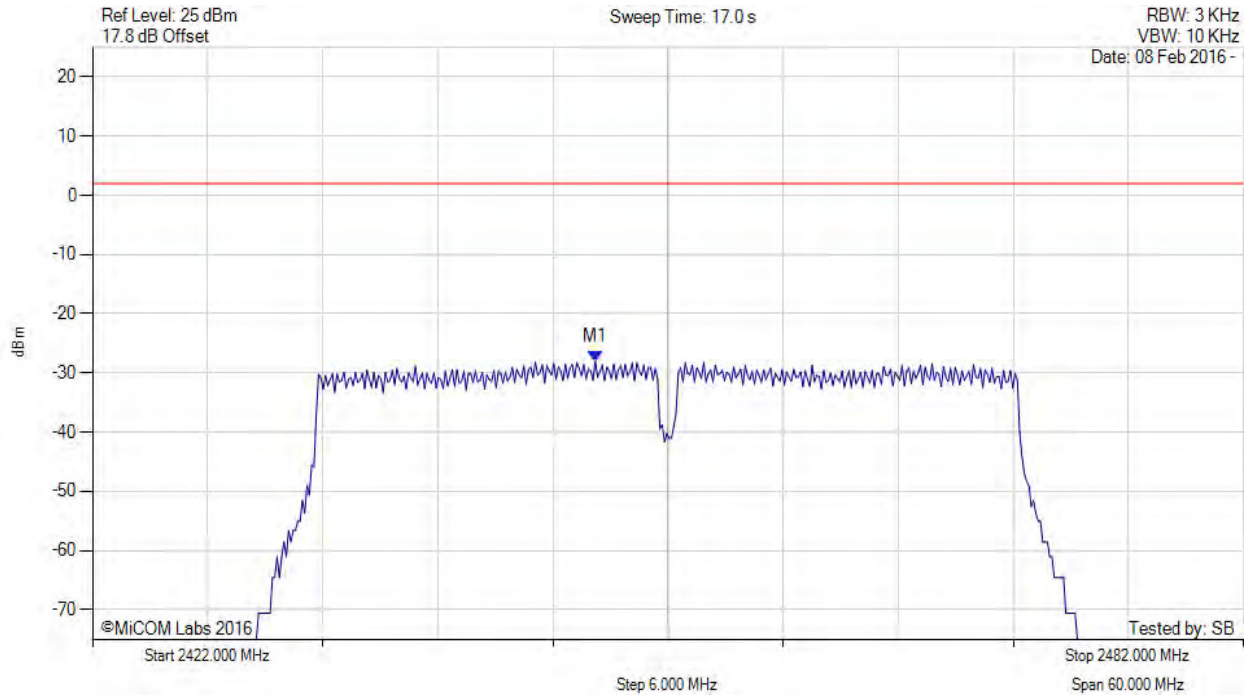

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2448.212 MHz : -28.023 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 221 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain d, Temp: Ambient, Voltage: 48 Vdc

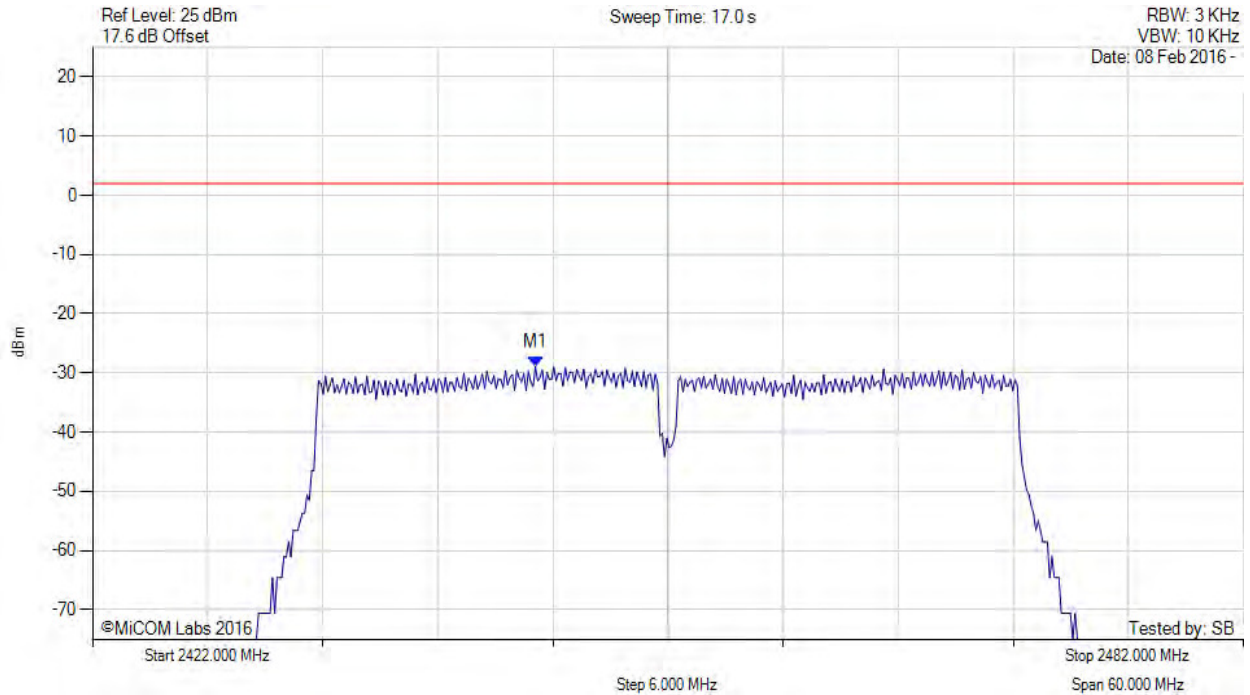

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2445.086 MHz : -28.982 dBm	Limit: ≤ 1.980 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




**Title:** Aruba Networks, Inc APIN0334, APIN0335  
**To:** FCC Subpart C 15.247 (DTS) & IC RSS-247  
**Serial #:** ARUB196-U3\_Conducted Rev A  
**Issue Date:** 6<sup>th</sup> May 2016  
**Page:** 222 of 223

POWER SPECTRAL DENSITY - AVERAGE



Variat: 802.11n HT-40, Channel: 2452.00 MHz, SUM, Temp: Ambient, Voltage: 48 Vdc

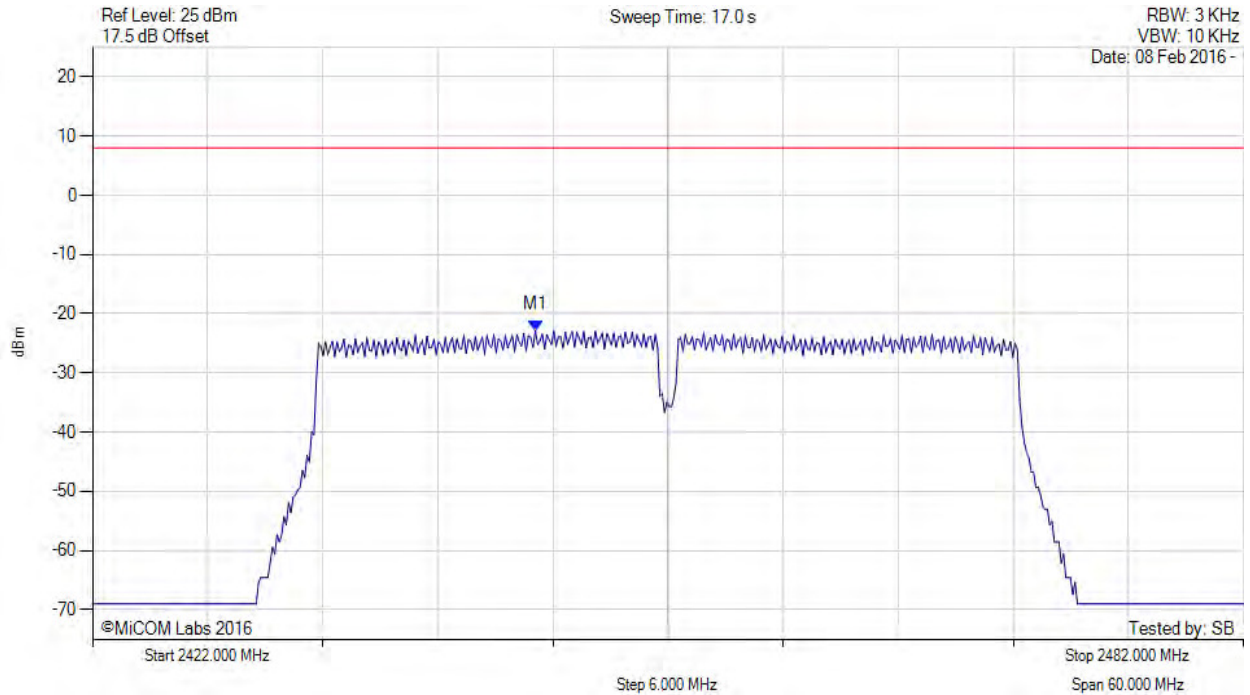

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2445.100 MHz : -22.823 dBm M1 + DCCF : 2445.100 MHz : -22.691 dBm Duty Cycle Correction Factor : +0.13 dB	Limit: ≤ 8.0 dBm Margin: -30.7 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court  
Pleasanton, California 94566, USA  
Tel: +1 (925) 462 0304  
Fax: +1 (925) 462 0306  
[www.micomlabs.com](http://www.micomlabs.com)