


REVISIONS			
REV	DESCRIPTION	DATE	APPROVE


NOTE:

- 1.MATERIAL: PC FILM(SABIC-LEXAN 8B35), t=0.127mm
- 2.ADHESIVE: 3M-467,t=0.05 mm
3. COLOR: PMS BLACK C ■
PMS GRAY 3C ■
刀模: ———,R=0.2
4. UL APPROVED, PGDQ2.CM-100-010
- 5.被貼物:塑膠
- 6.TEMPERATURE RESISTANT= 120° C
- 7.印刷公差:尺寸30mm以下~120mm為±0.3mm,120~315mm為±0.5mm,315以上±0.8mm
- 8.片狀入料
- 9.TEST REQUIREMENTS OR OTHER EQUIVALENT TEST METHOD

TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	□□□□□ ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5 % is affected.

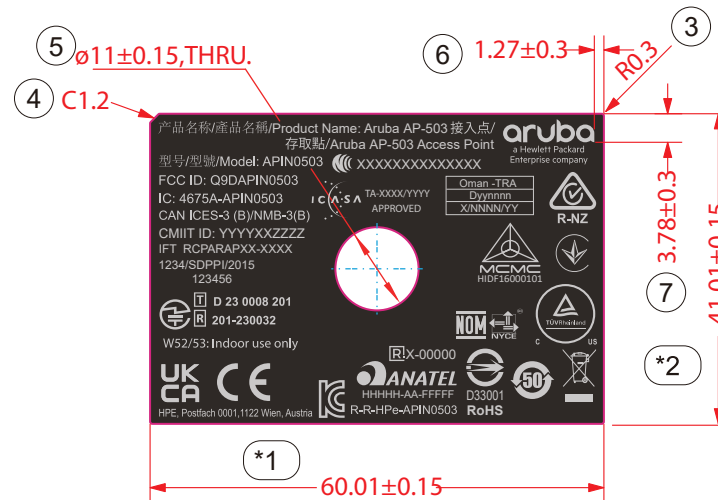

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE: INTEGRAL DIMENSIONS ± 0.2 1 PLACE DECIMAL ± 0.2 ANGULAR DIMENSIONS ± 2° HOLES UNDER Ø5.00 ± 0.2		THIRD ANGLE PROJECTION 		WNC 啟碁科技股份有限公司 Wistron NeWeb Corp. 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726	
DRAWN				DWG TITLE	
ENGR				SIZE A4	DWG NO.
APVD				SCALE 1/1	REV 1
				SHEET 1 OF 1	

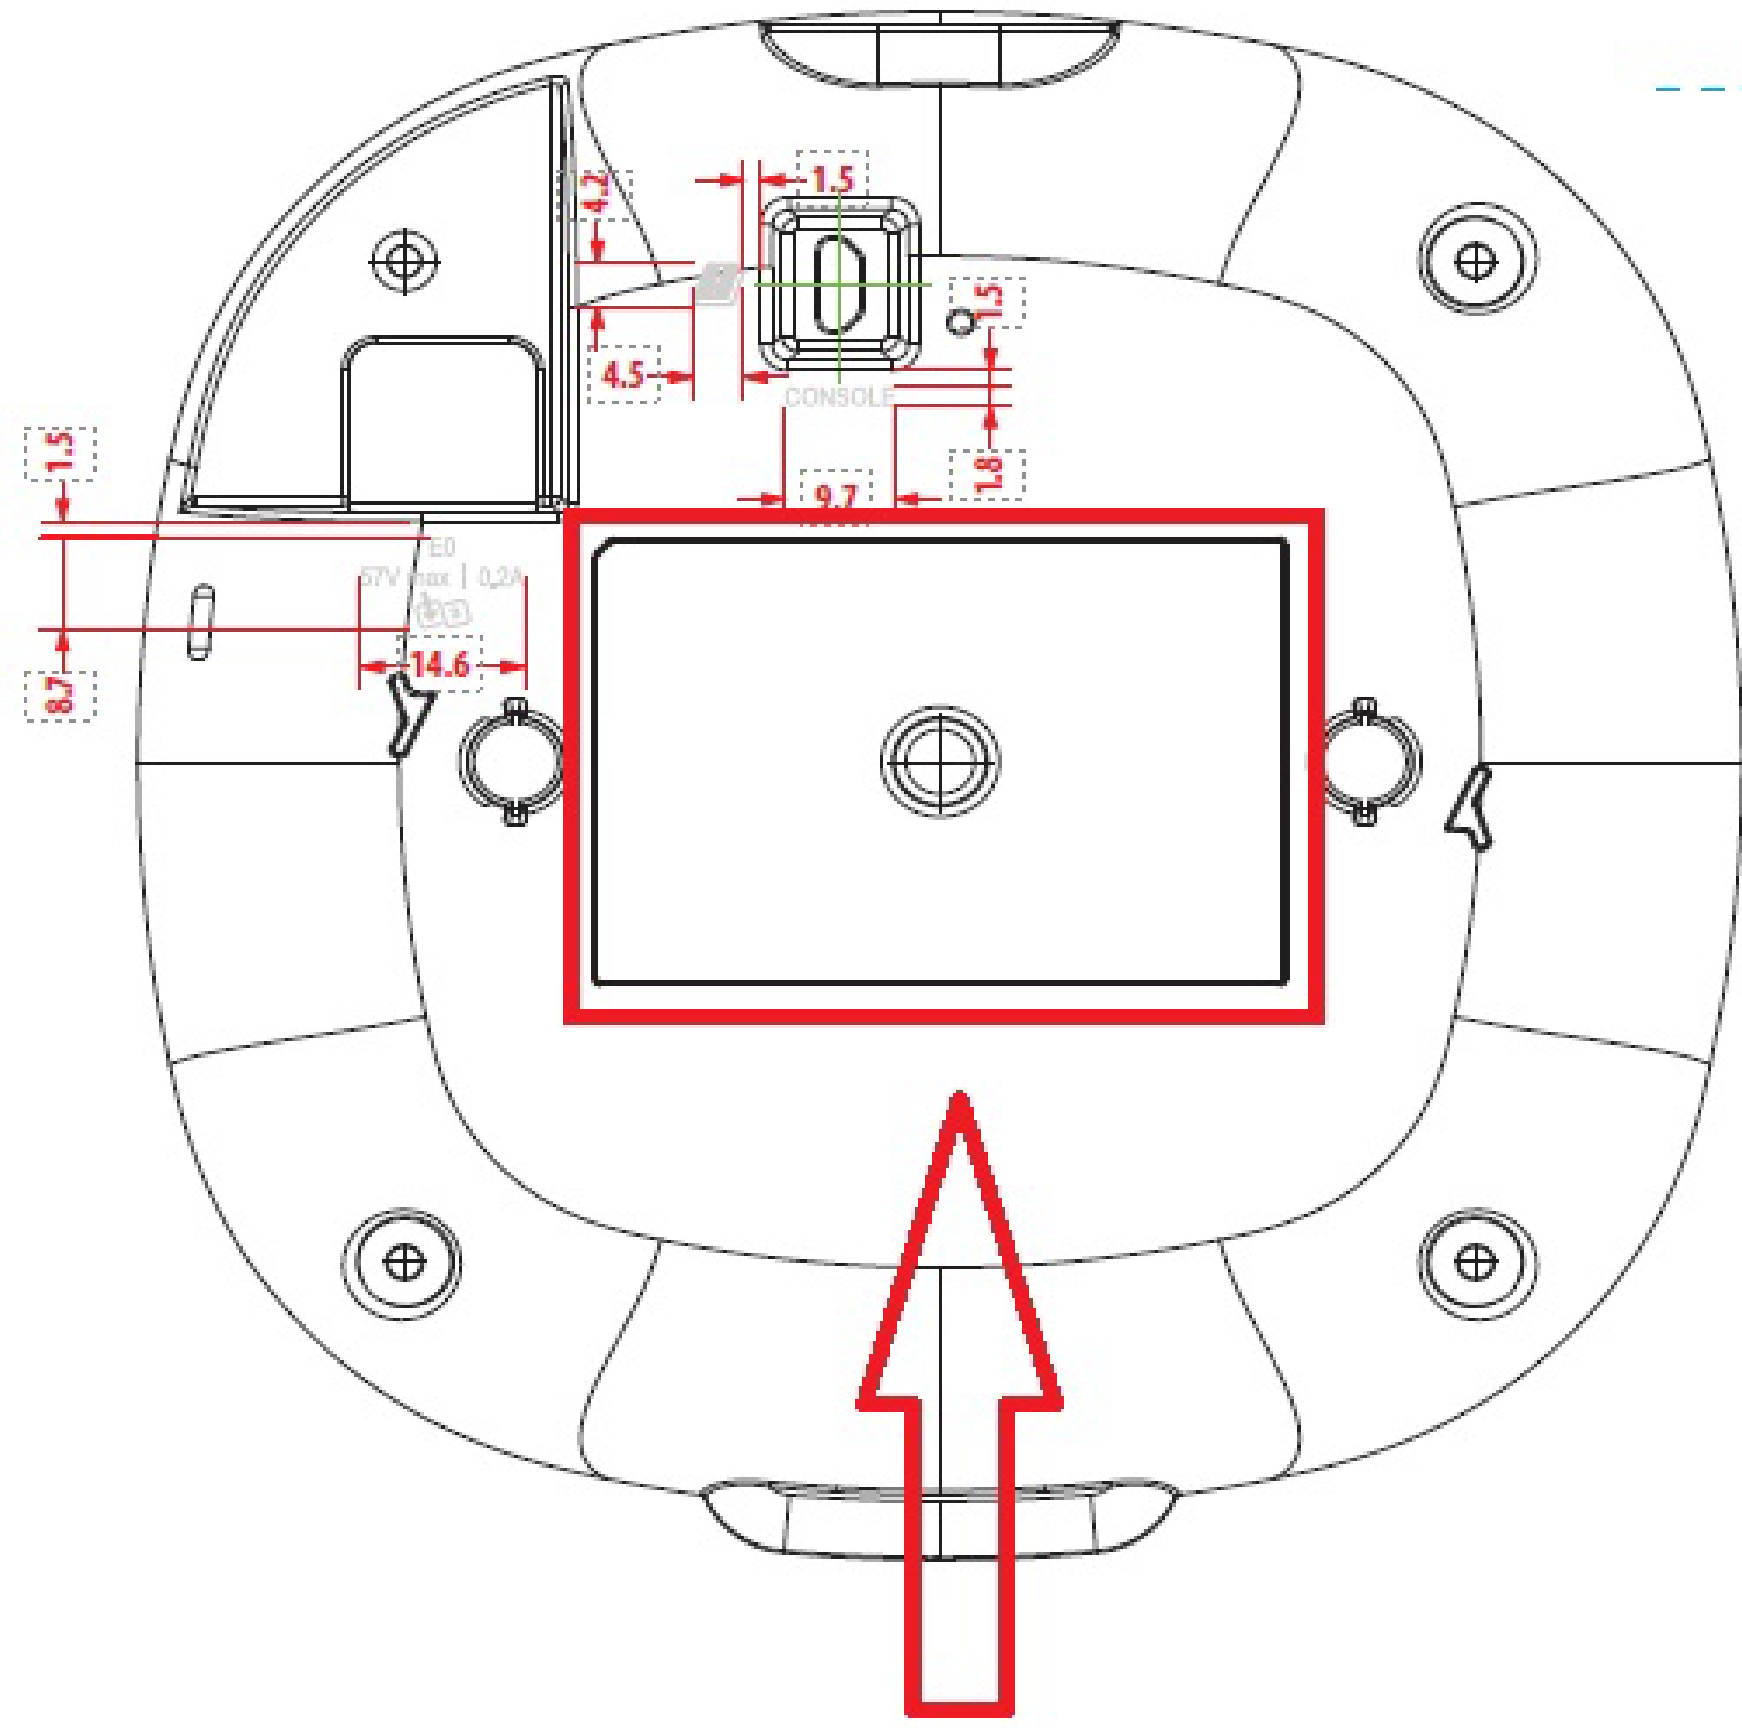

Label Location

