

Site: AC1	Time: 2019/06/26 - 20:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11b at channel 2462MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	2461.168	108.491	75.674	N/A	N/A	32.817	AV
2			2483.500	44.032	11.121	-9.968	54.000	32.911	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11g at channel 2412MHz Ant 0 + 1	

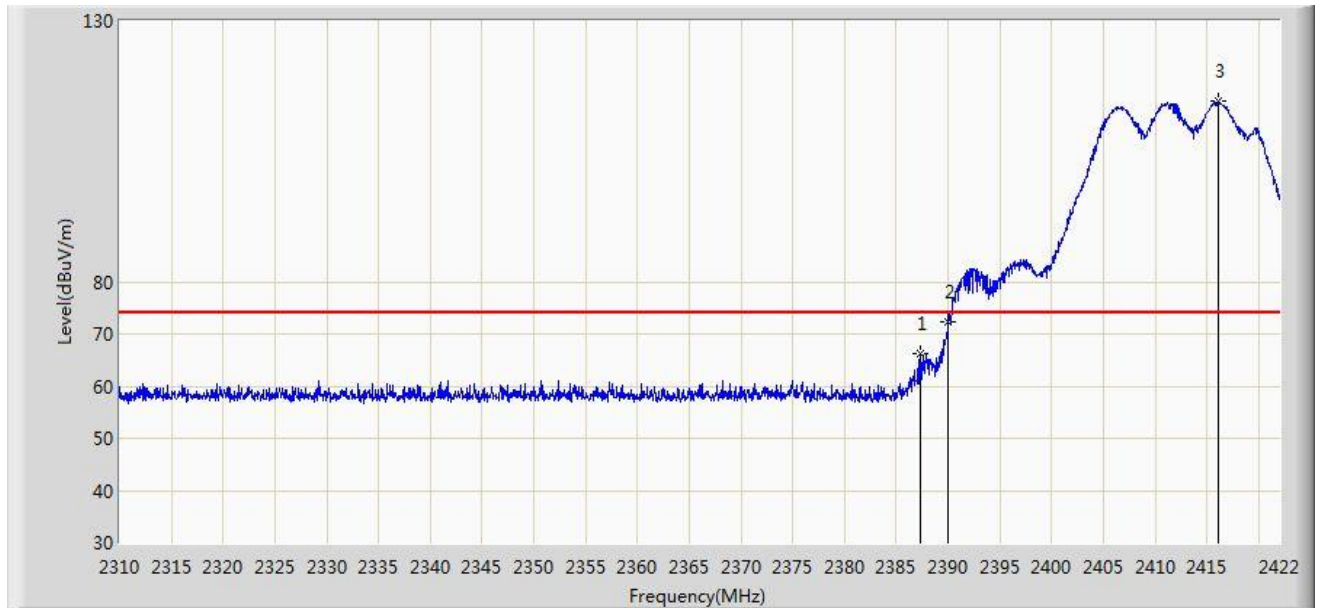


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.280	66.262	33.755	-7.738	74.000	32.507	PK
2			2390.000	72.401	39.883	-1.599	74.000	32.518	PK
3		*	2416.064	114.540	81.913	N/A	N/A	32.627	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11g at channel 2412MHz Ant 0 + 1	

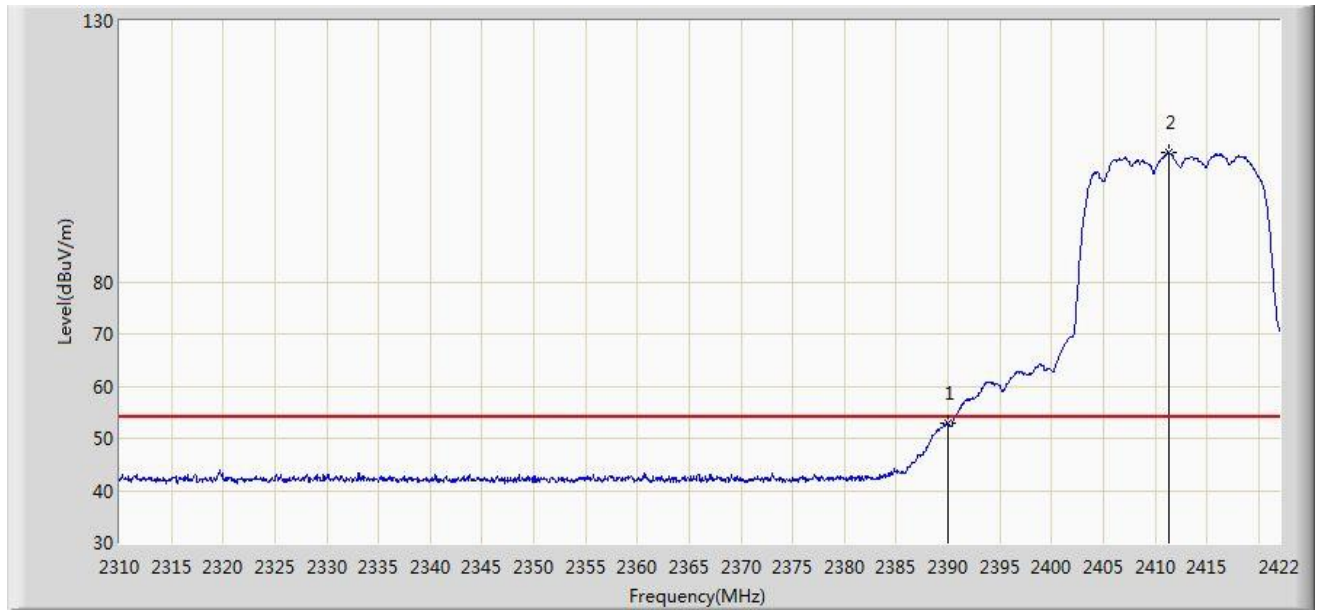


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.754	20.236	-1.246	54.000	32.518	AV
2		*	2411.304	104.655	72.048	N/A	N/A	32.607	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11g at channel 2412MHz Ant 0 + 1	

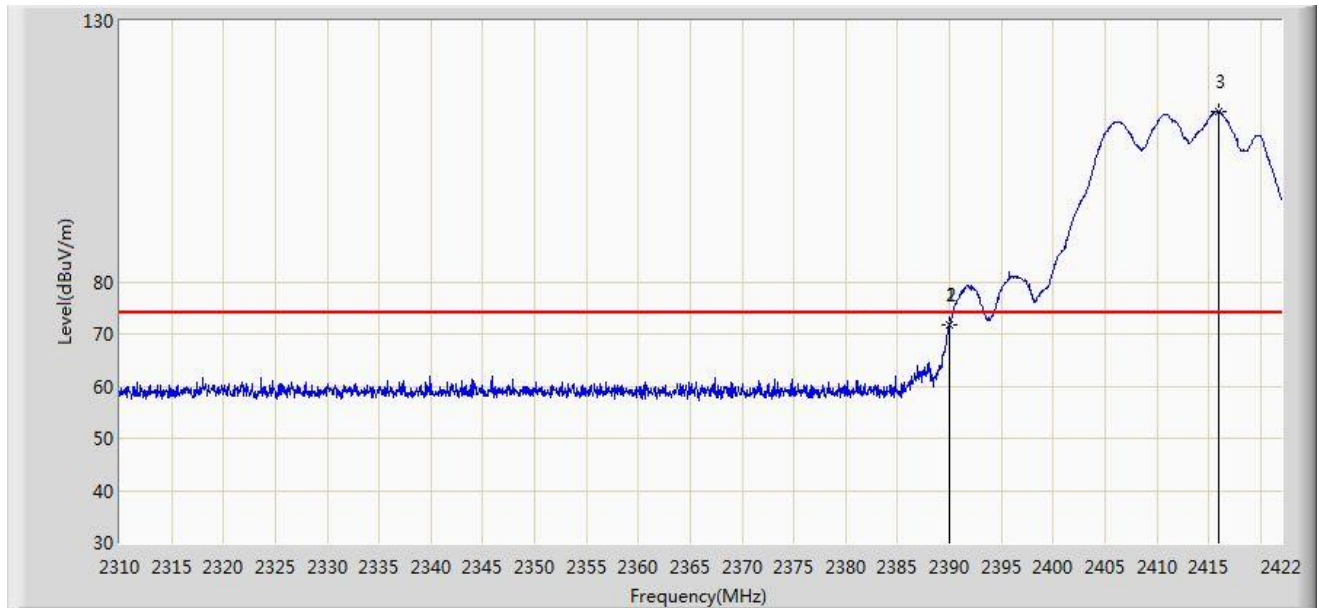


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.968	71.734	39.216	-2.266	74.000	32.518	PK
2			2390.000	71.698	39.180	-2.302	74.000	32.518	PK
3		*	2416.008	112.533	79.906	N/A	N/A	32.627	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11g at channel 2412MHz Ant 0 + 1	

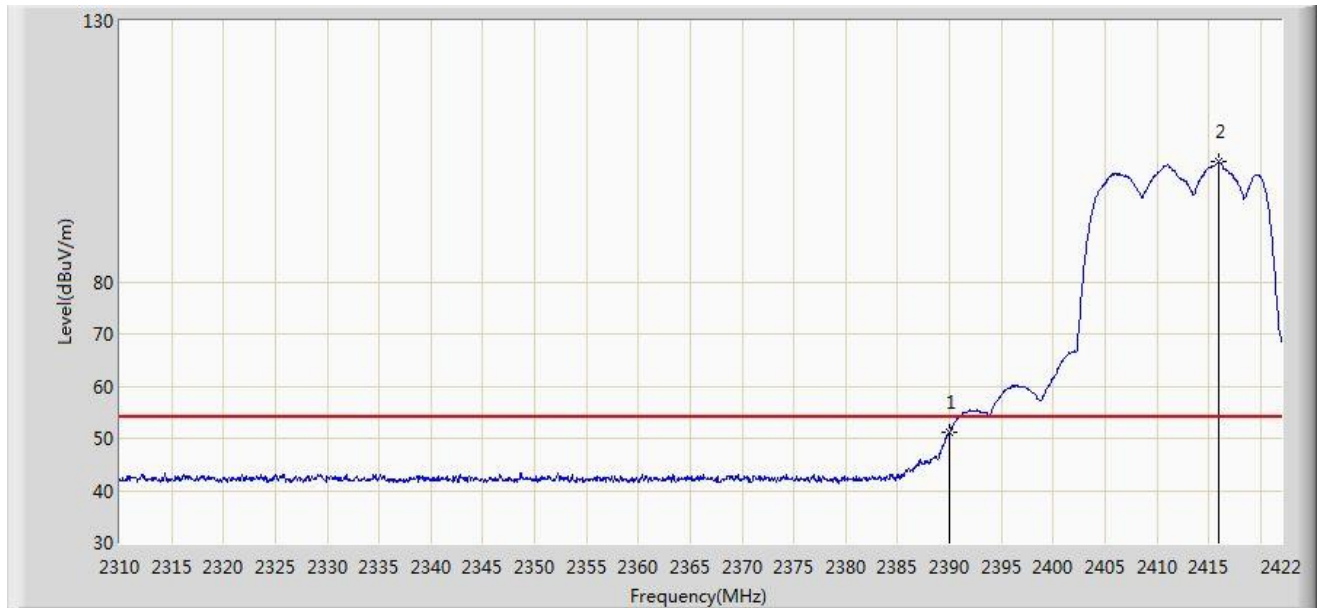


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.114	18.596	-2.886	54.000	32.518	AV
2		*	2416.008	102.931	70.304	N/A	N/A	32.627	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 22:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11g at channel 2457MHz Ant 0 + 1	

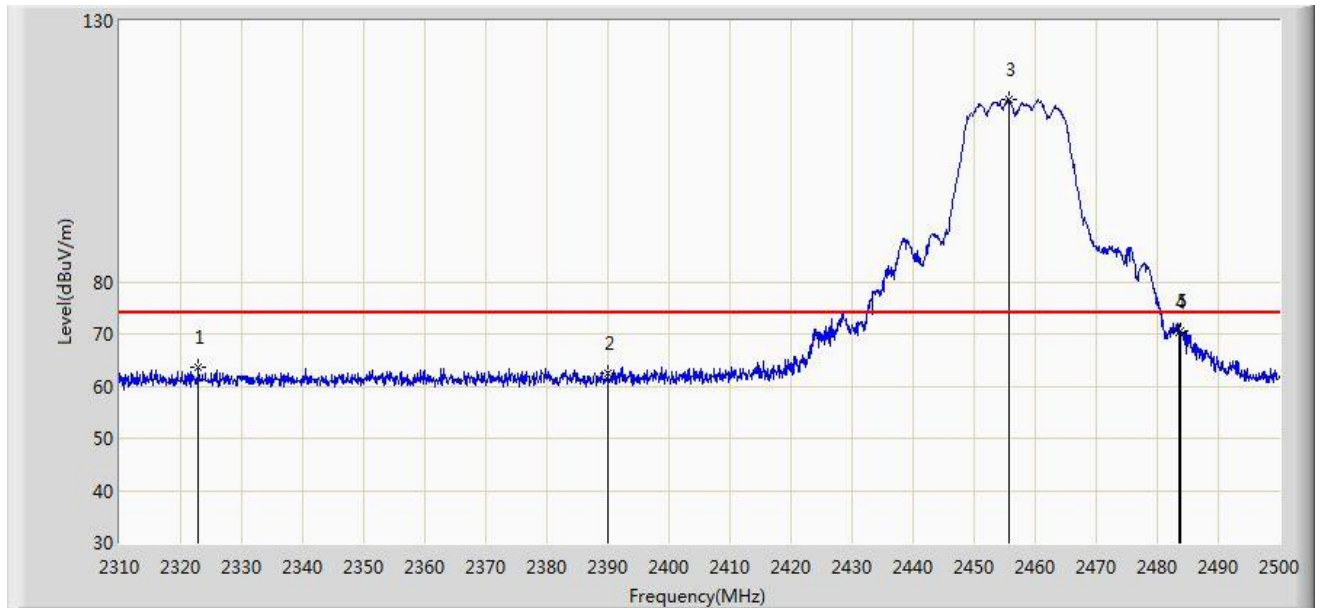


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2322.920	63.671	31.435	-10.329	74.000	32.236	PK
2			2390.000	62.400	29.882	-11.600	74.000	32.518	PK
3		*	2455.730	114.915	82.121	N/A	N/A	32.794	PK
4			2483.500	70.355	37.444	-3.645	74.000	32.911	PK
5			2483.755	70.719	37.807	-3.281	74.000	32.912	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 22:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11g at channel 2457MHz Ant 0 + 1	

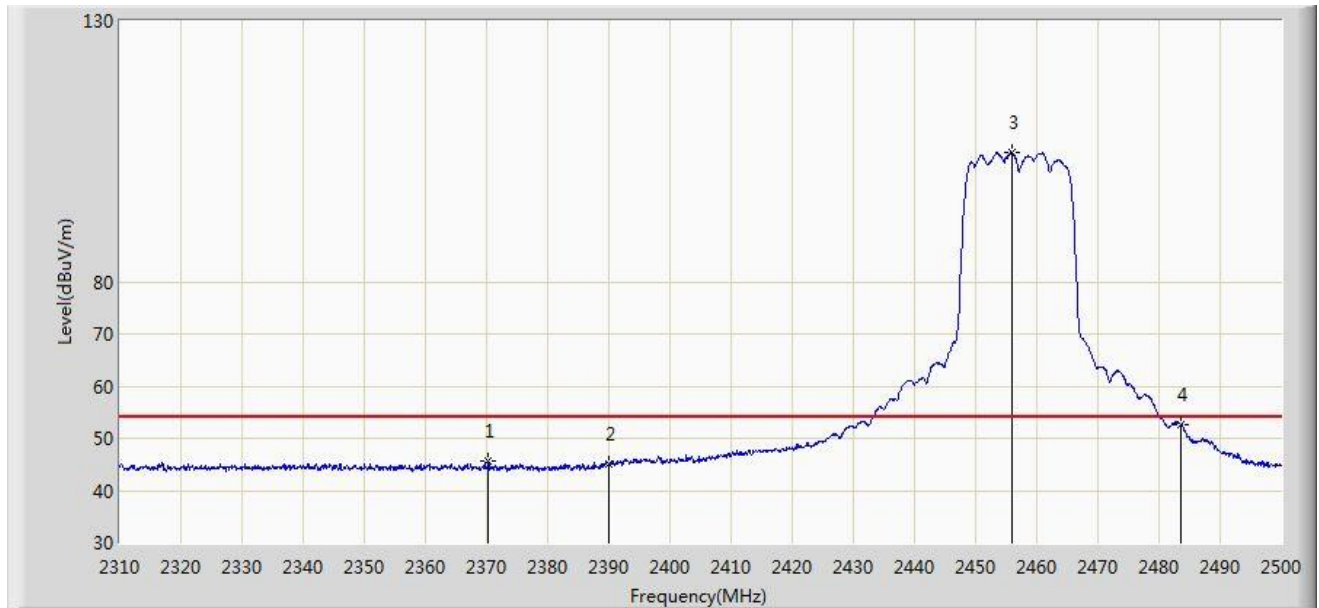


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2370.325	45.672	13.237	-8.328	54.000	32.435	AV
2			2390.000	44.968	12.450	-9.032	54.000	32.518	AV
3		*	2456.015	104.794	71.999	N/A	N/A	32.795	AV
4			2483.500	52.649	19.738	-1.351	54.000	32.911	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 22:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11g at channel 2457MHz Ant 0 + 1	

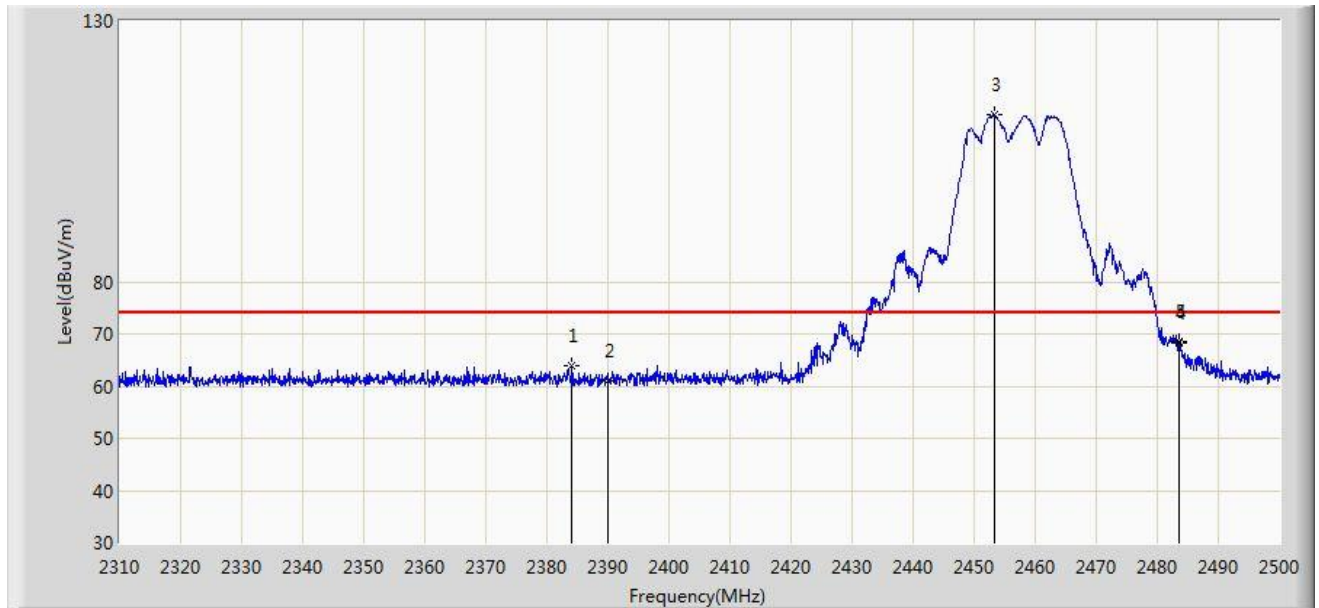


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2384.100	63.981	31.488	-10.019	74.000	32.493	PK
2			2390.000	60.918	28.400	-13.082	74.000	32.518	PK
3		*	2453.355	112.104	79.320	N/A	N/A	32.784	PK
4			2483.500	68.280	35.369	-5.720	74.000	32.911	PK
5			2483.565	68.432	35.521	-5.568	74.000	32.911	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 22:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11g at channel 2457MHz Ant 0 + 1	

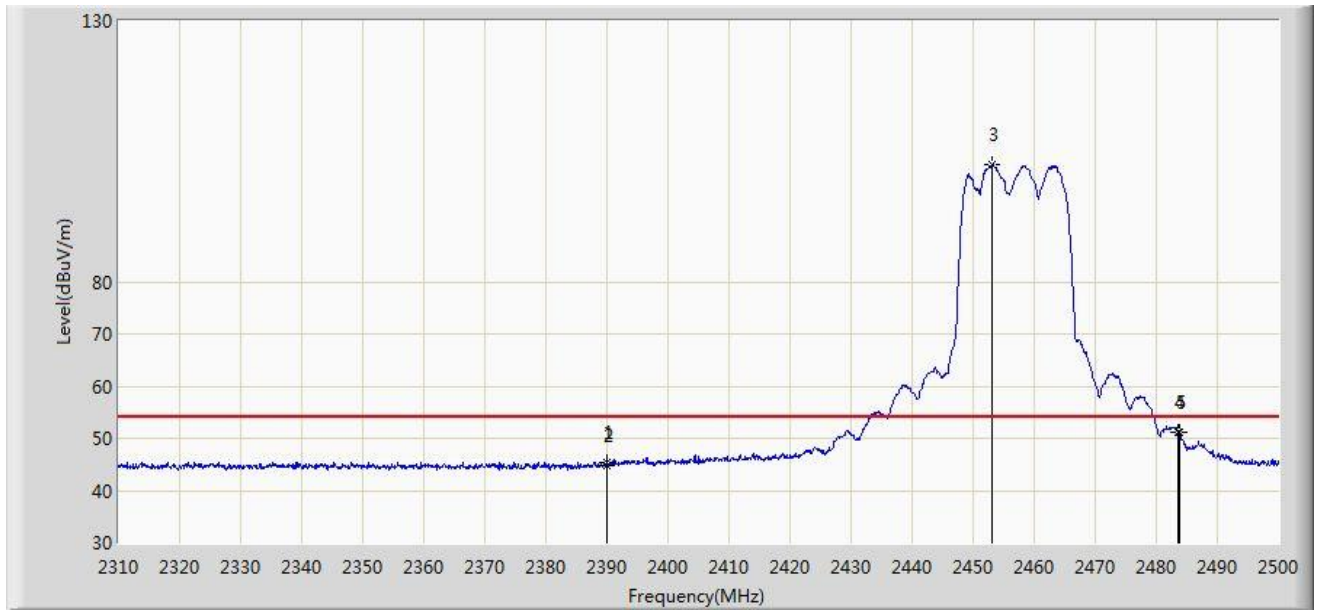


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.895	45.499	12.981	-8.501	54.000	32.518	AV
2			2390.000	44.757	12.239	-9.243	54.000	32.518	AV
3		*	2453.165	102.340	69.556	N/A	N/A	32.783	AV
4			2483.500	51.086	18.175	-2.914	54.000	32.911	AV
5			2483.755	51.276	18.364	-2.724	54.000	32.912	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11g at channel 2462MHz Ant 0 + 1	

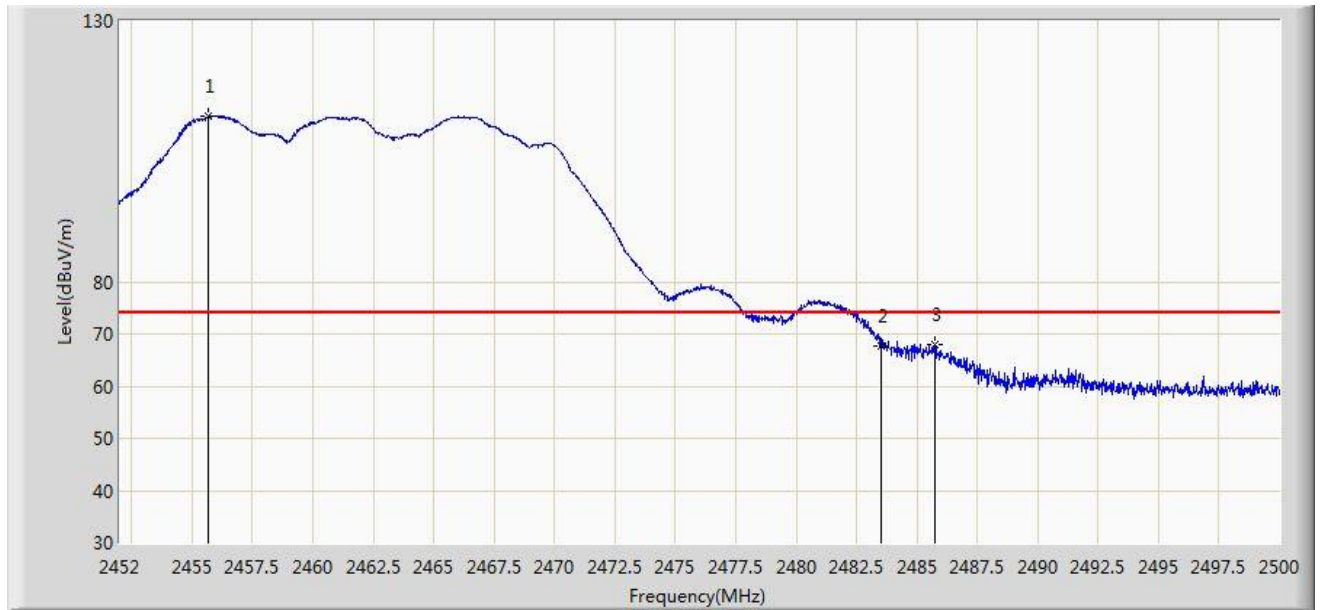


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.648	111.626	78.832	N/A	N/A	32.794	PK
2			2483.500	67.729	34.818	-6.271	74.000	32.911	PK
3			2485.720	67.844	34.924	-6.156	74.000	32.920	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11g at channel 2462MHz Ant 0 + 1	

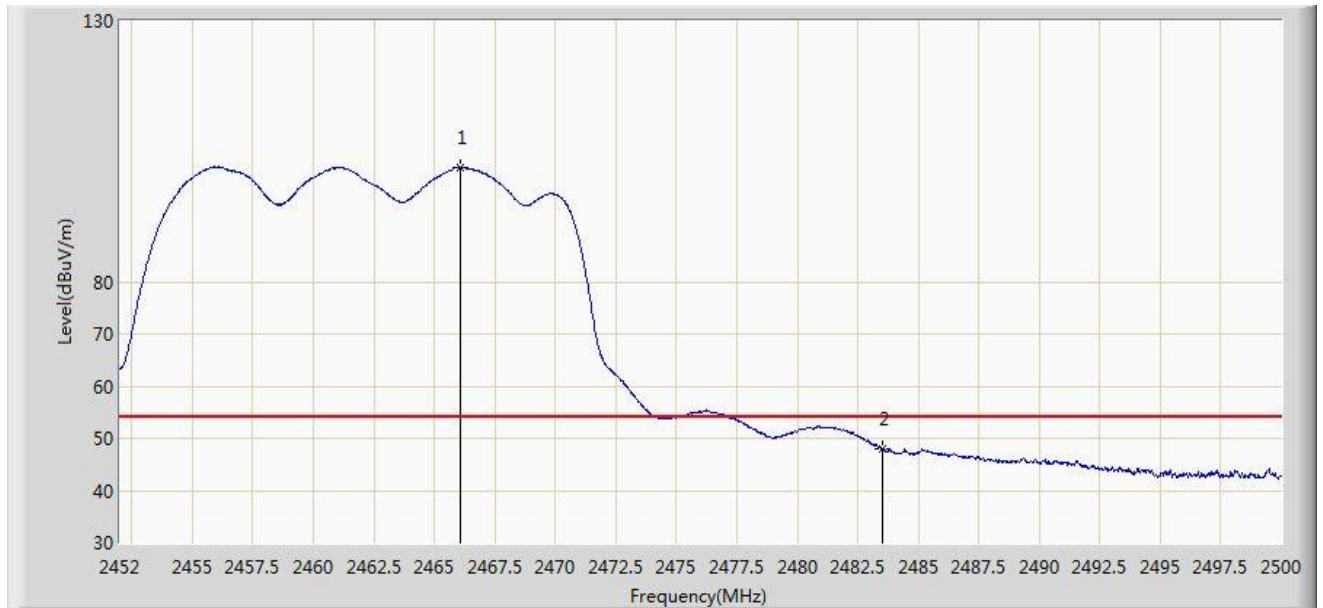


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.088	101.943	69.106	N/A	N/A	32.837	AV
2			2483.500	47.859	14.948	-6.141	54.000	32.911	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11g at channel 2462MHz Ant 0 + 1	

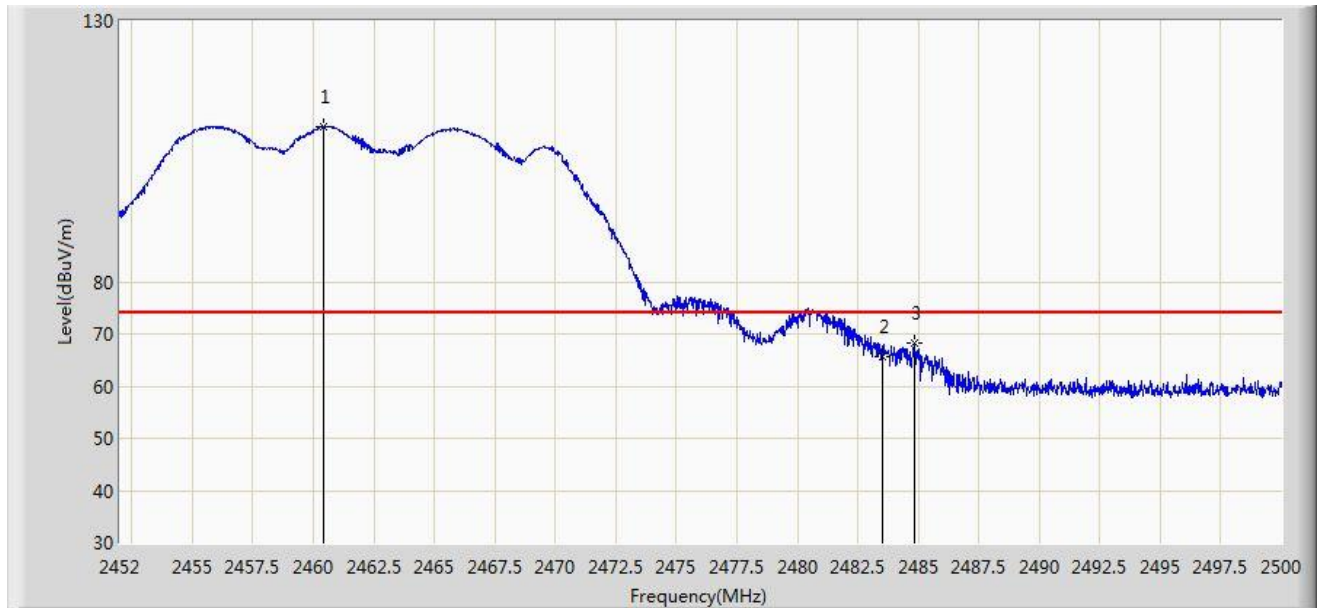


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.448	109.743	76.929	N/A	N/A	32.814	PK
2			2483.500	65.705	32.794	-8.295	74.000	32.911	PK
3			2484.856	68.181	35.264	-5.819	74.000	32.917	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11g at channel 2462MHz Ant 0 + 1	

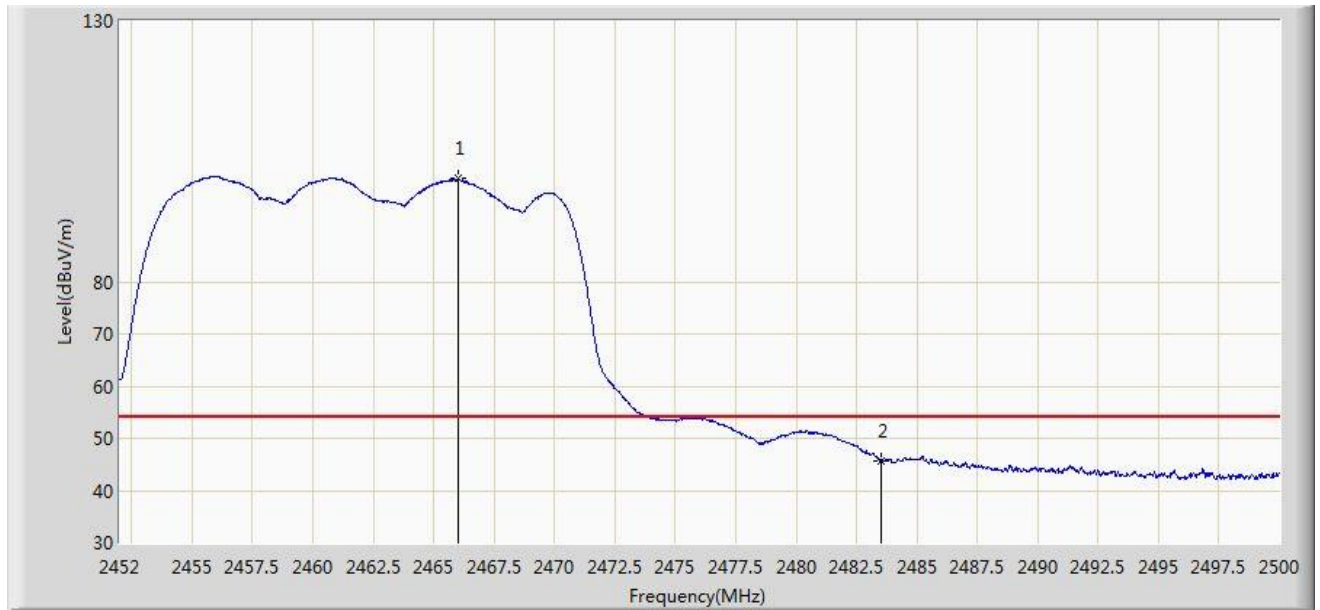


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.040	99.746	66.909	N/A	N/A	32.837	AV
2			2483.500	45.759	12.848	-8.241	54.000	32.911	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 20:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT20 at channel 2412MHz Ant 0 + 1	

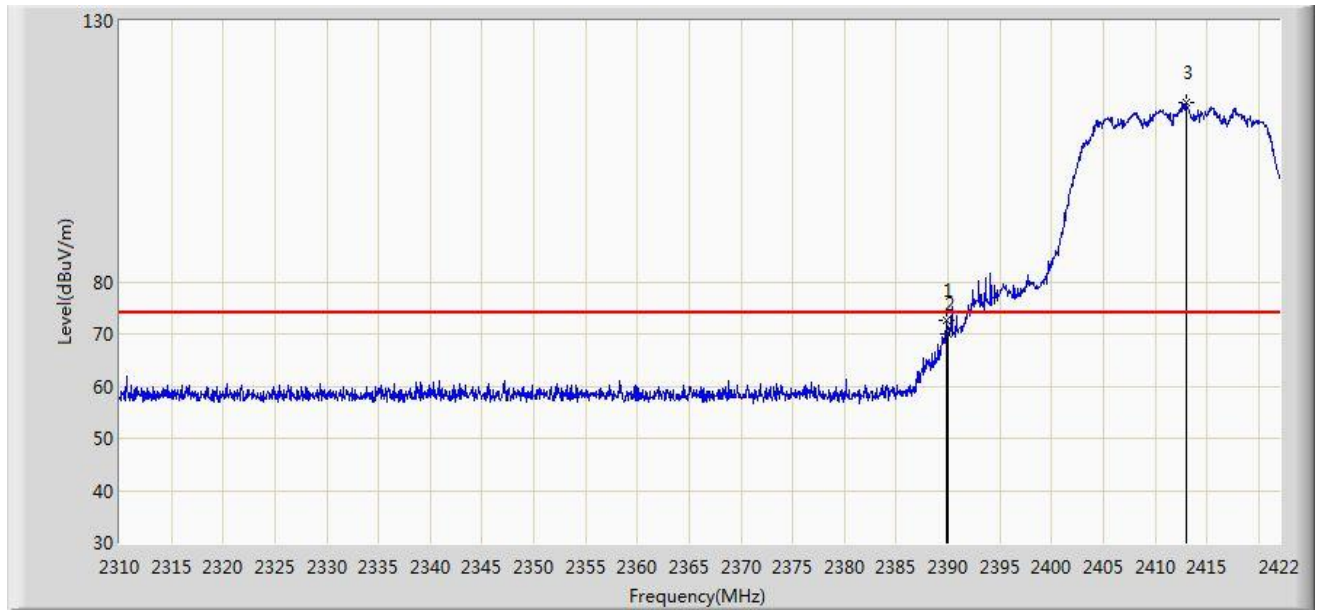


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	72.742	40.225	-1.258	74.000	32.517	PK
2			2390.000	70.111	37.593	-3.889	74.000	32.518	PK
3		*	2412.984	114.263	81.649	N/A	N/A	32.614	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 20:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT20 at channel 2412MHz Ant 0 + 1	

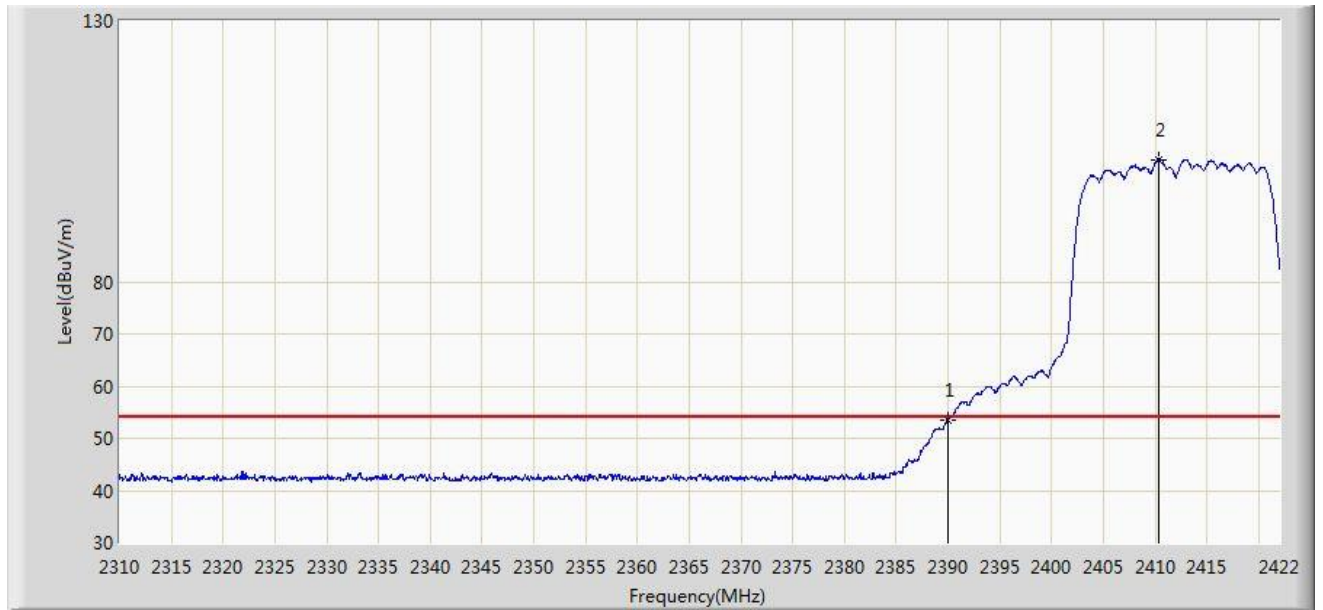


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.596	21.078	-0.404	54.000	32.518	AV
2		*	2410.296	103.462	70.859	N/A	N/A	32.603	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 20:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT20 at channel 2412MHz Ant 0 + 1	

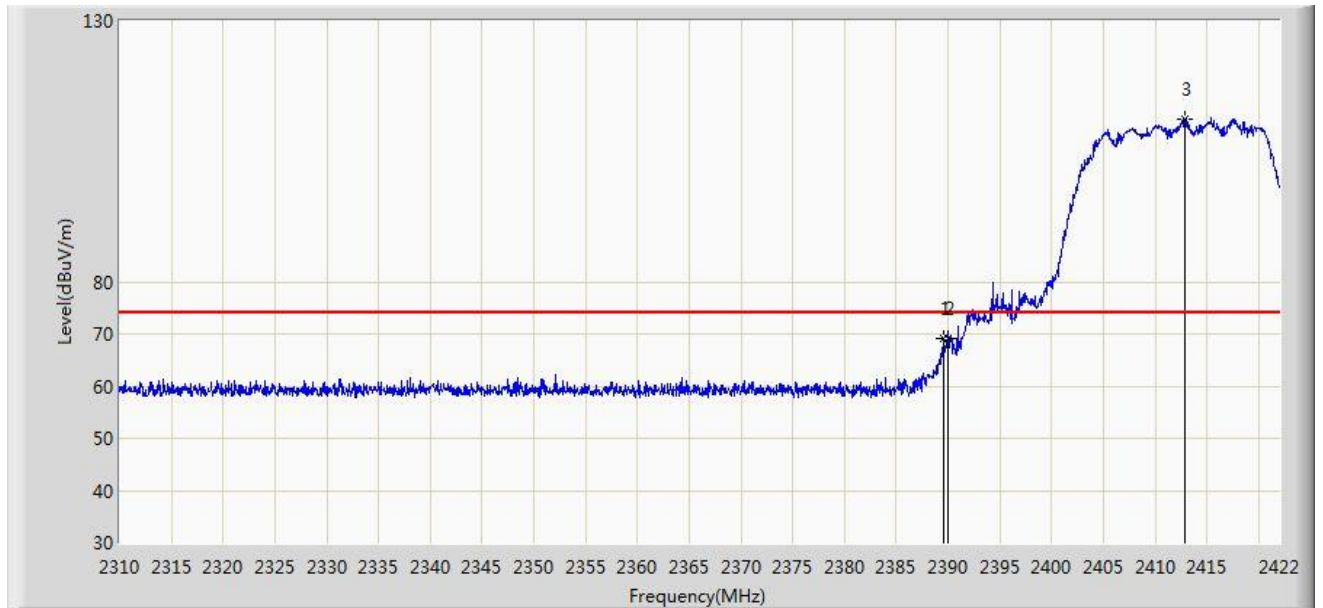


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.520	69.103	36.587	-4.897	74.000	32.517	PK
2			2390.000	69.111	36.593	-4.889	74.000	32.518	PK
3		*	2412.872	111.246	78.632	N/A	N/A	32.614	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 20:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT20 at channel 2412MHz Ant 0 + 1	

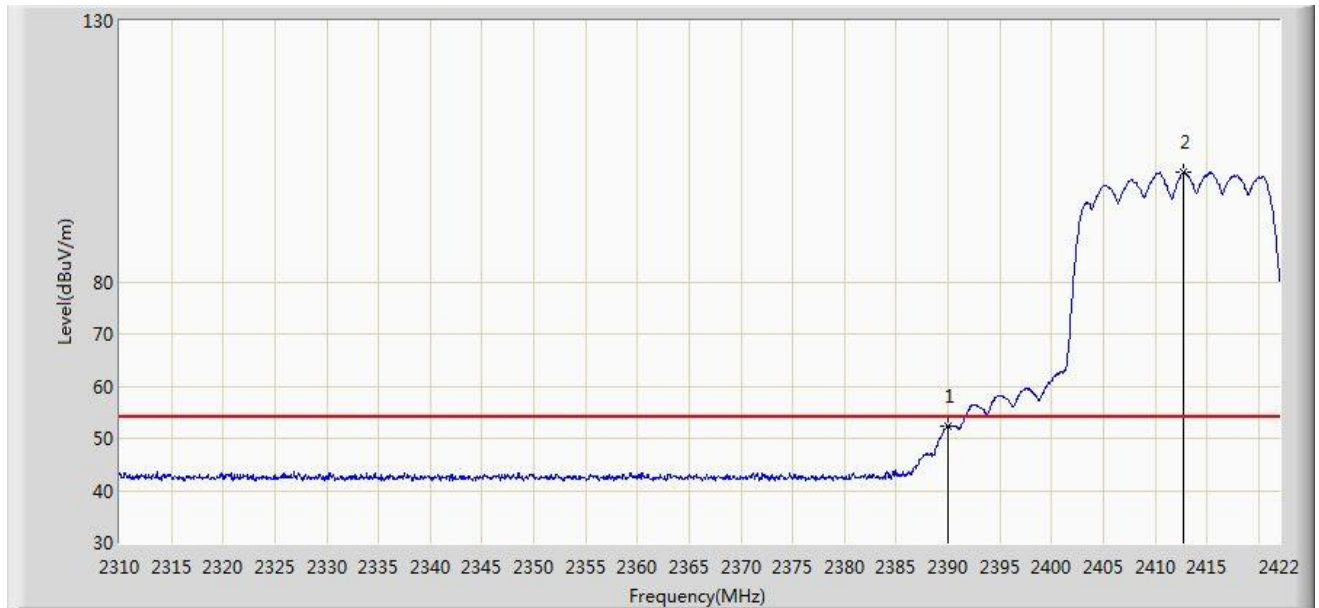


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.239	19.721	-1.761	54.000	32.518	AV
2		*	2412.760	100.996	68.383	N/A	N/A	32.613	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 22:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11n-HT20 at channel 2457MHz Ant 0 + 1	

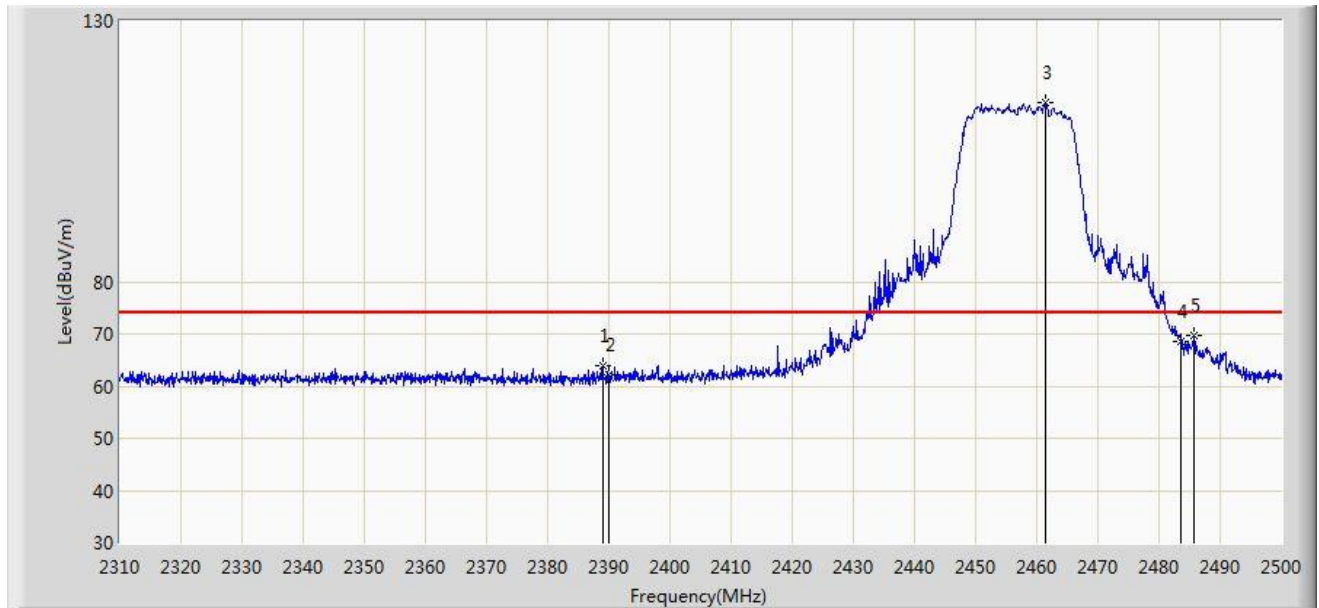


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.945	64.048	31.534	-9.952	74.000	32.514	PK
2			2390.000	62.153	29.635	-11.847	74.000	32.518	PK
3		*	2461.335	114.311	81.493	N/A	N/A	32.818	PK
4			2483.500	68.525	35.614	-5.475	74.000	32.911	PK
5			2485.750	69.651	36.731	-4.349	74.000	32.920	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 22:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11n-HT20 at channel 2457MHz Ant 0 + 1	

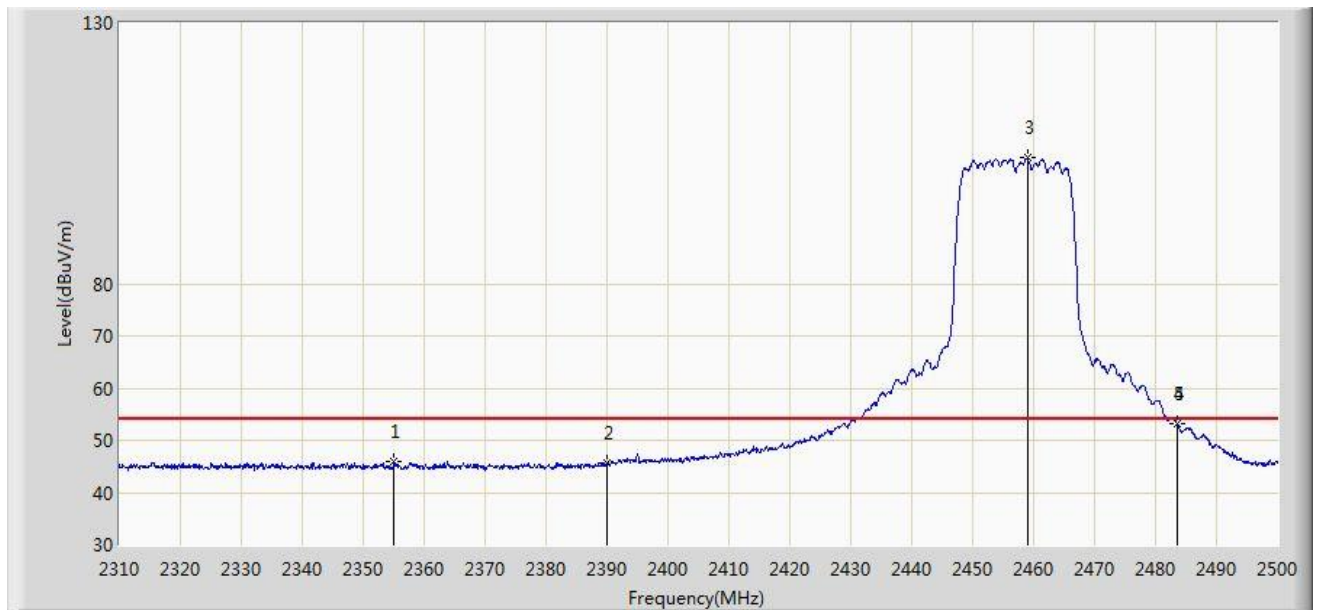


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2355.030	45.891	13.520	-8.109	54.000	32.371	AV
2			2390.000	45.594	13.076	-8.406	54.000	32.518	AV
3		*	2458.960	104.102	71.294	N/A	N/A	32.808	AV
4			2483.500	53.260	20.349	-0.740	54.000	32.911	AV
5			2483.565	53.289	20.378	-0.711	54.000	32.911	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 22:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11n-HT20 at channel 2457MHz Ant 0 + 1	

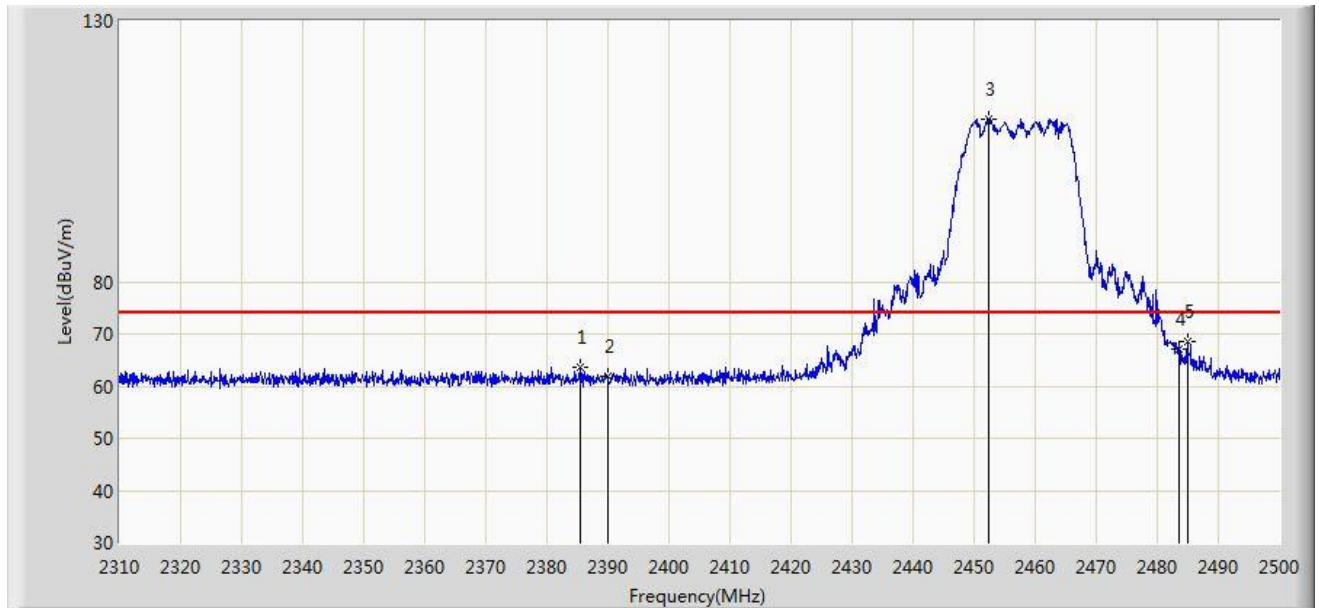


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.430	63.522	31.023	-10.478	74.000	32.499	PK
2			2390.000	61.817	29.299	-12.183	74.000	32.518	PK
3		*	2452.310	111.242	78.462	N/A	N/A	32.780	PK
4			2483.500	67.132	34.221	-6.868	74.000	32.911	PK
5			2484.895	68.435	35.518	-5.565	74.000	32.917	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 23:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11n-HT20 at channel 2457MHz Ant 0 + 1	

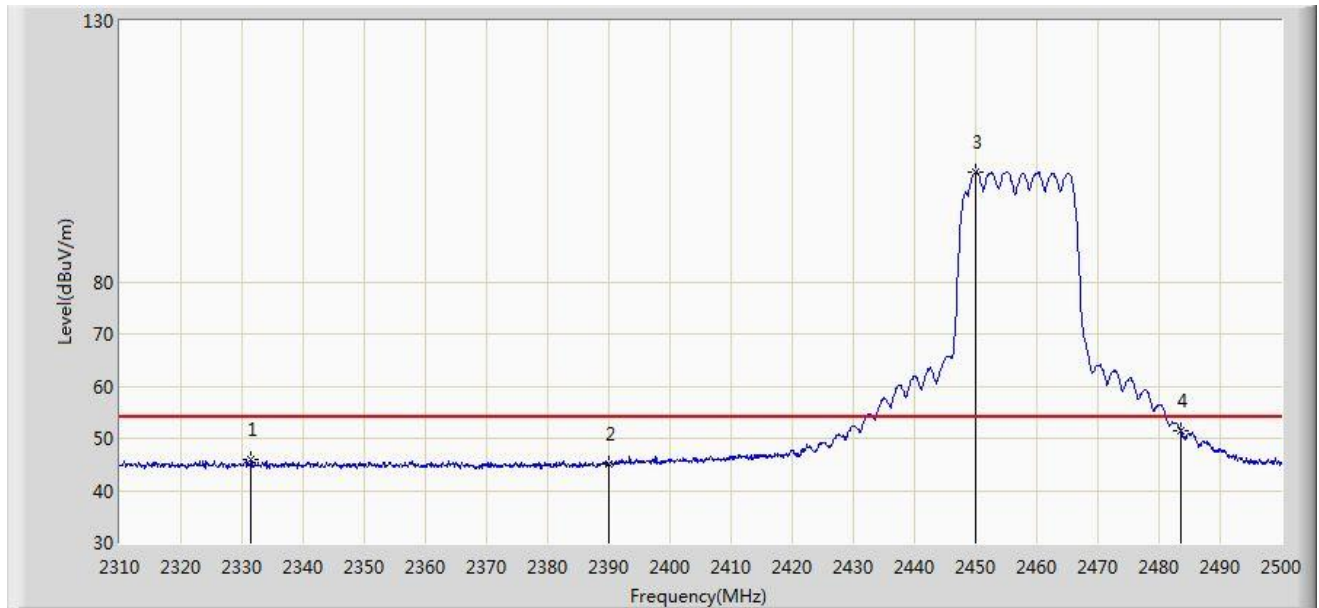

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2331.470	45.814	13.542	-8.186	54.000	32.272	AV
2			2390.000	45.166	12.648	-8.834	54.000	32.518	AV
3		*	2450.030	101.128	68.358	N/A	N/A	32.770	AV
4			2483.500	51.585	18.674	-2.415	54.000	32.911	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 20:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT20 at channel 2462MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.776	112.181	79.357	N/A	N/A	32.823	PK
2			2483.500	72.592	39.681	-1.408	74.000	32.911	PK
3			2484.952	72.059	39.142	-1.941	74.000	32.917	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 20:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT20 at channel 2462MHz Ant 0 + 1	

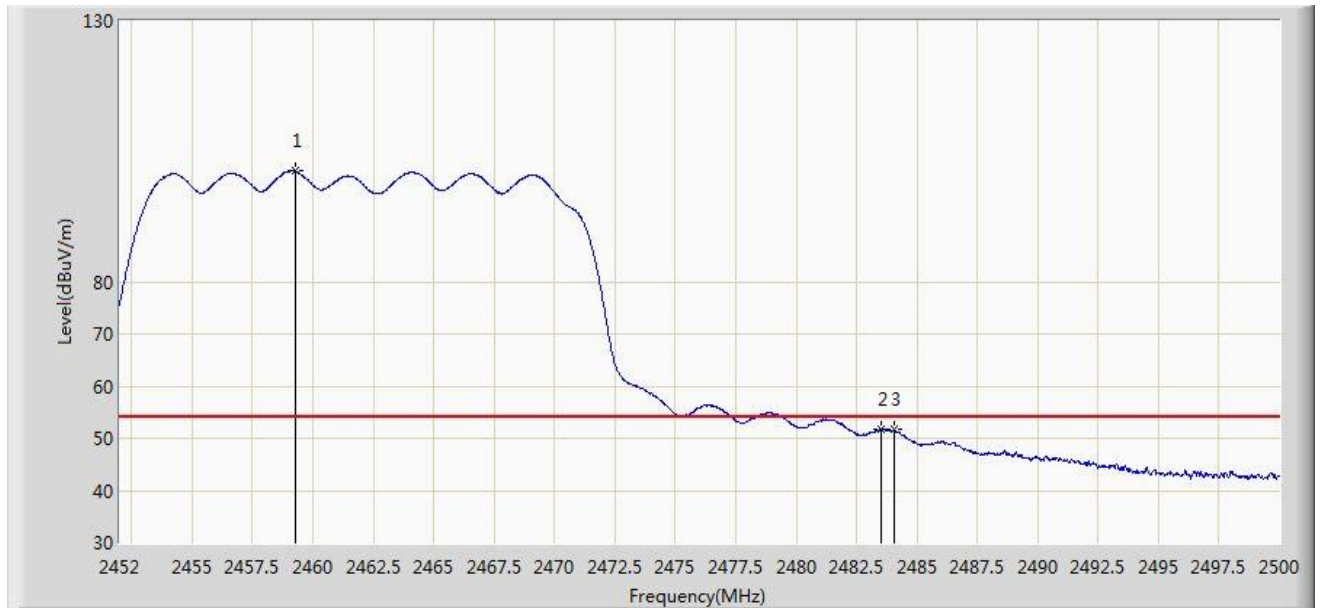


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.296	101.281	68.472	N/A	N/A	32.809	AV
2			2483.500	51.597	18.686	-2.403	54.000	32.911	AV
3			2484.040	51.634	18.721	-2.366	54.000	32.913	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT20 at channel 2462MHz Ant 0 + 1	

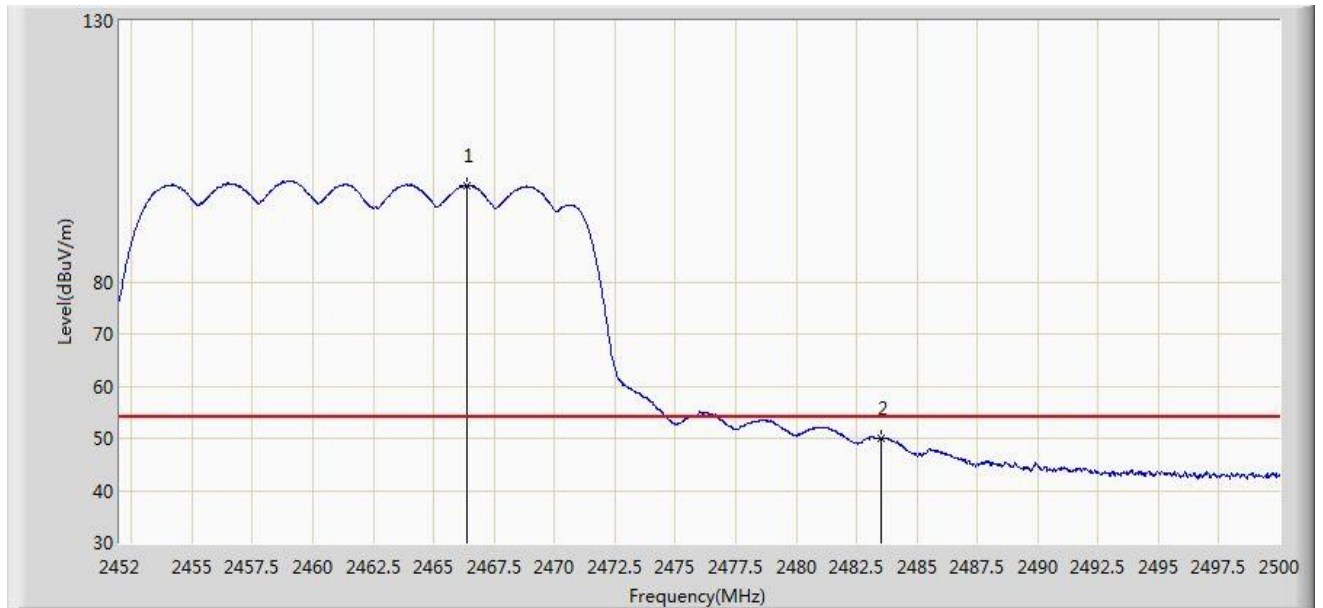


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.376	98.499	65.660	N/A	N/A	32.838	AV
2			2483.500	50.062	17.151	-3.938	54.000	32.911	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT20 at channel 2462MHz Ant 0 + 1	

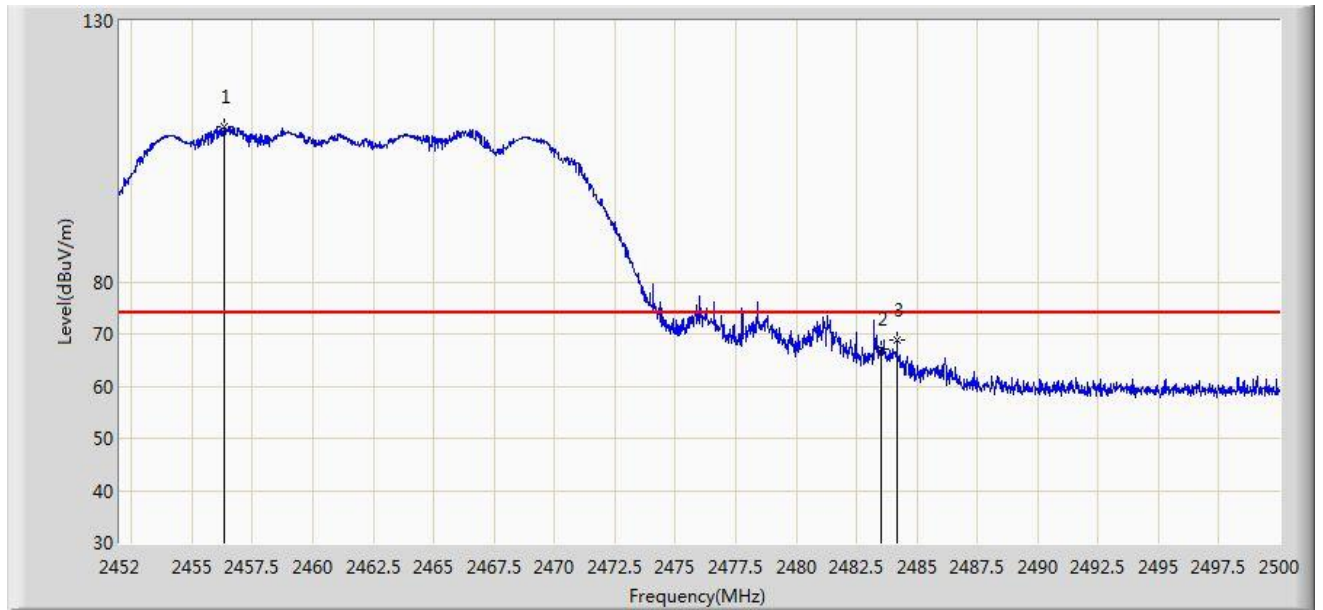


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.344	109.728	76.931	N/A	N/A	32.797	PK
2			2483.500	67.035	34.124	-6.965	74.000	32.911	PK
3			2484.184	68.840	35.926	-5.160	74.000	32.914	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT40 at channel 2422MHz Ant 0 + 1	

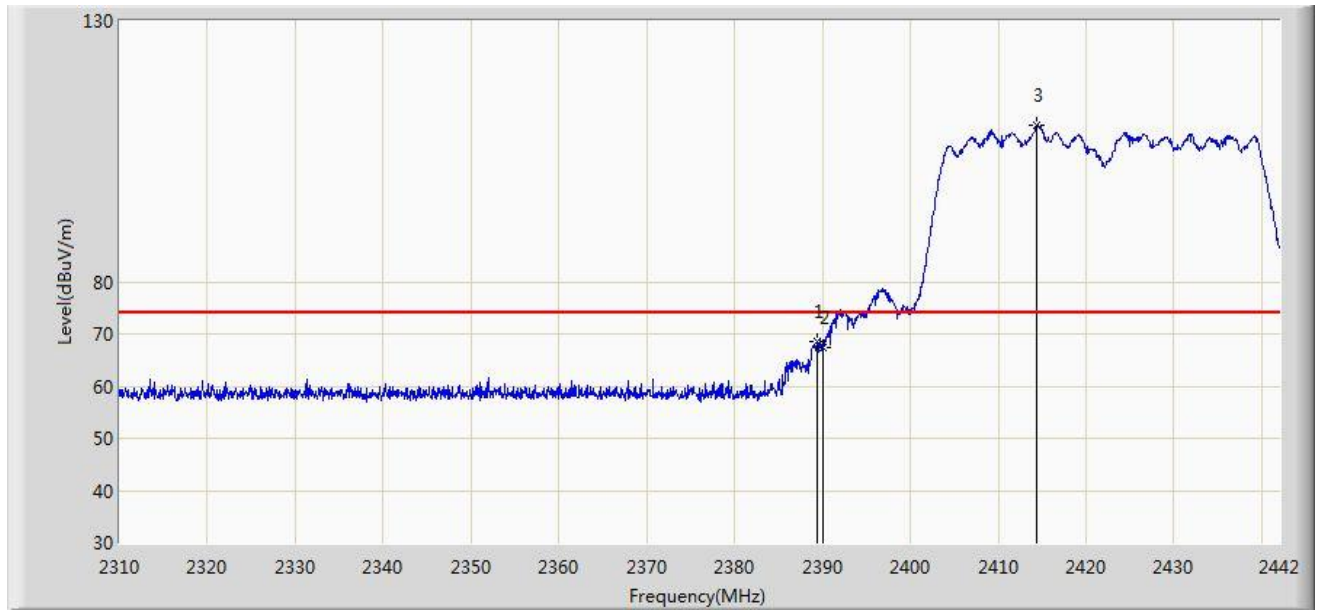


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.332	68.606	36.091	-5.394	74.000	32.515	PK
2			2390.000	67.261	34.743	-6.739	74.000	32.518	PK
3		*	2414.412	110.005	77.385	N/A	N/A	32.620	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT40 at channel 2422MHz Ant 0 + 1	

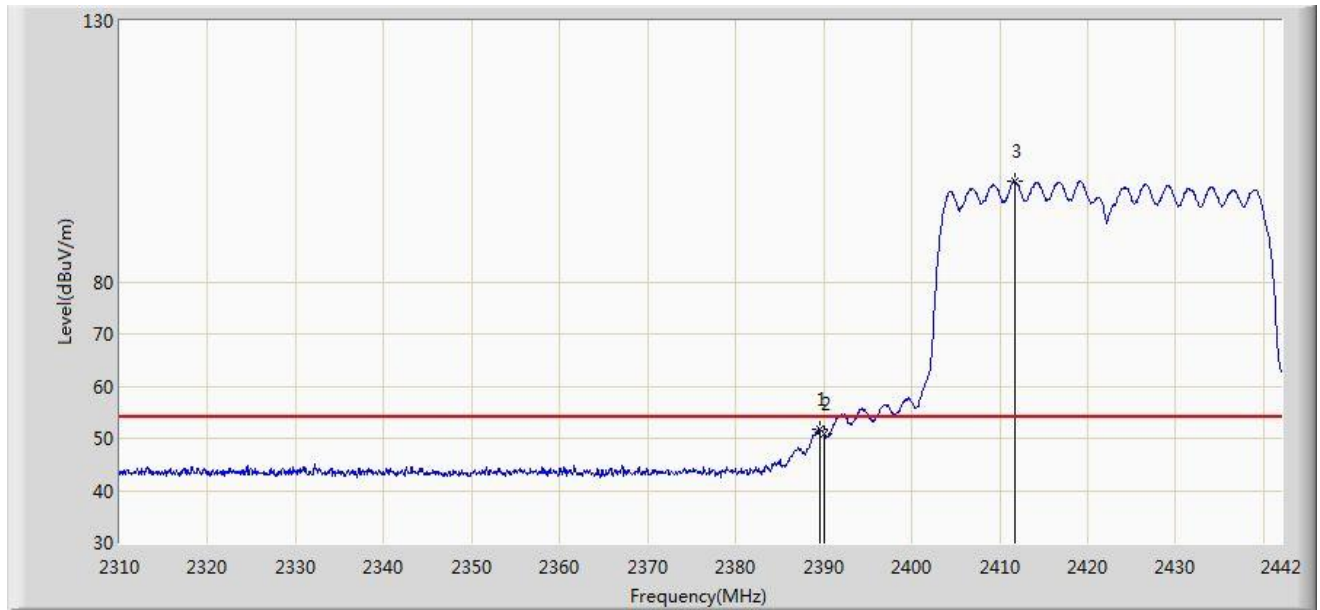


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.530	51.639	19.123	-2.361	54.000	32.517	AV
2			2390.000	50.980	18.462	-3.020	54.000	32.518	AV
3		*	2411.706	99.250	66.641	N/A	N/A	32.609	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT40 at channel 2422MHz Ant 0 + 1	

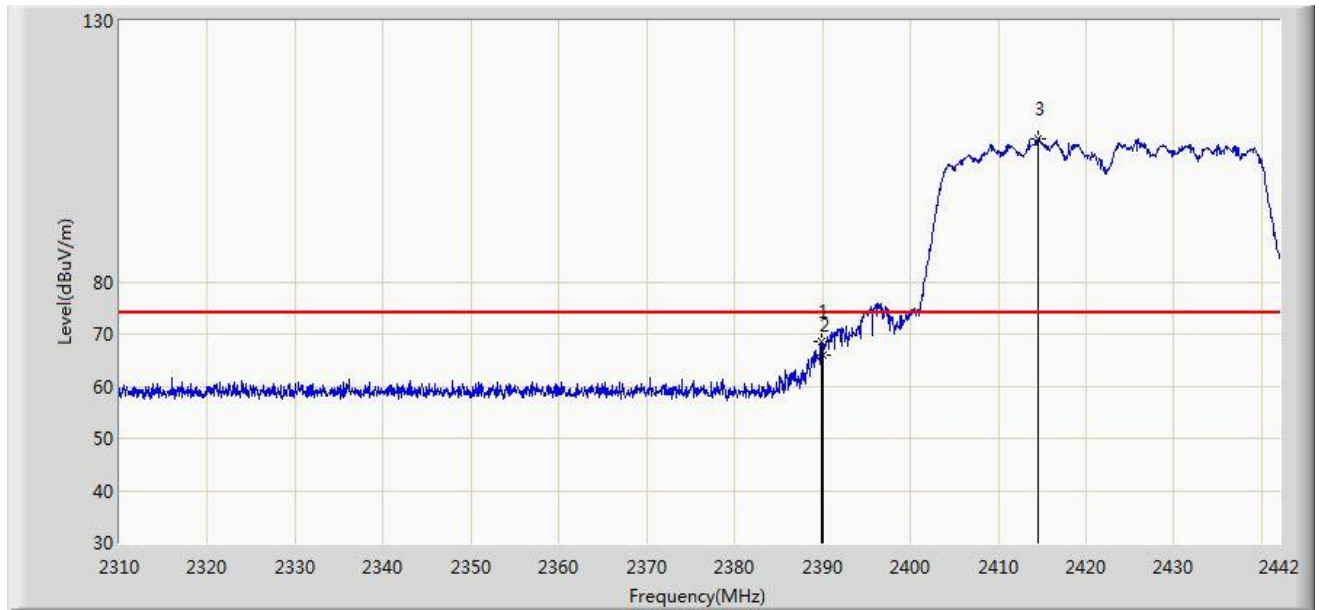


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.860	68.493	35.975	-5.507	74.000	32.518	PK
2			2390.000	65.805	33.287	-8.195	74.000	32.518	PK
3		*	2414.544	107.493	74.872	N/A	N/A	32.621	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT40 at channel 2422MHz Ant 0 + 1	

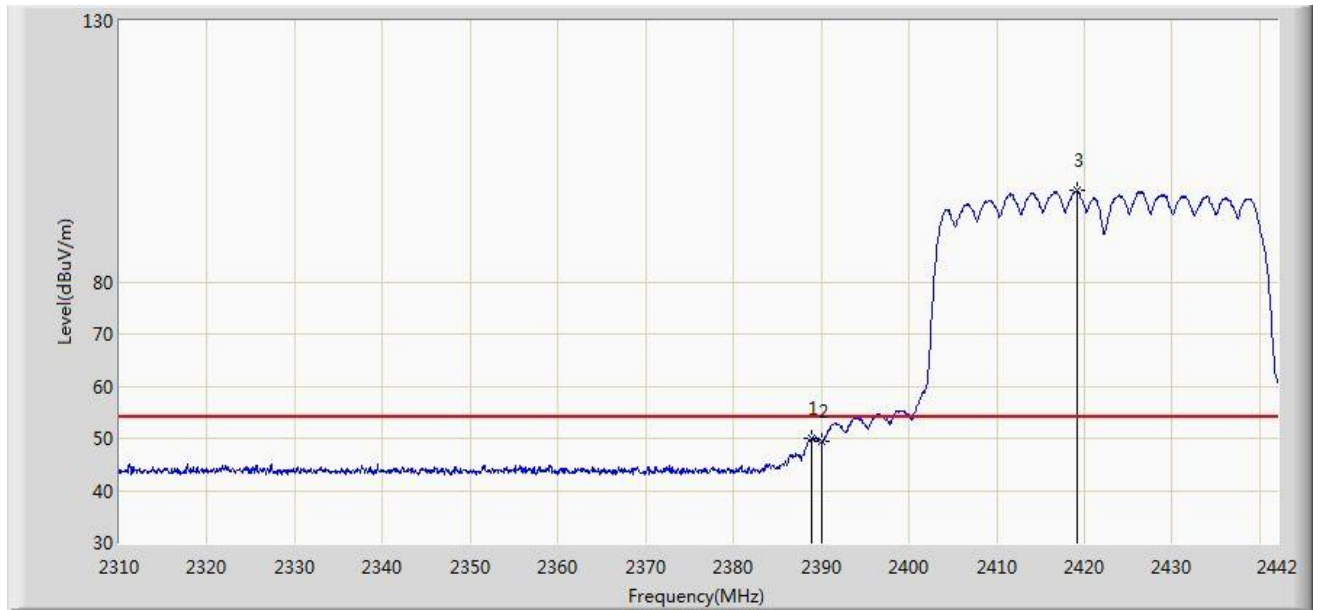


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.870	49.892	17.379	-4.108	54.000	32.514	AV
2			2390.000	49.290	16.772	-4.710	54.000	32.518	AV
3		*	2419.164	97.558	64.918	N/A	N/A	32.640	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 23:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11n-HT40 at channel 2442MHz Ant 0 + 1	

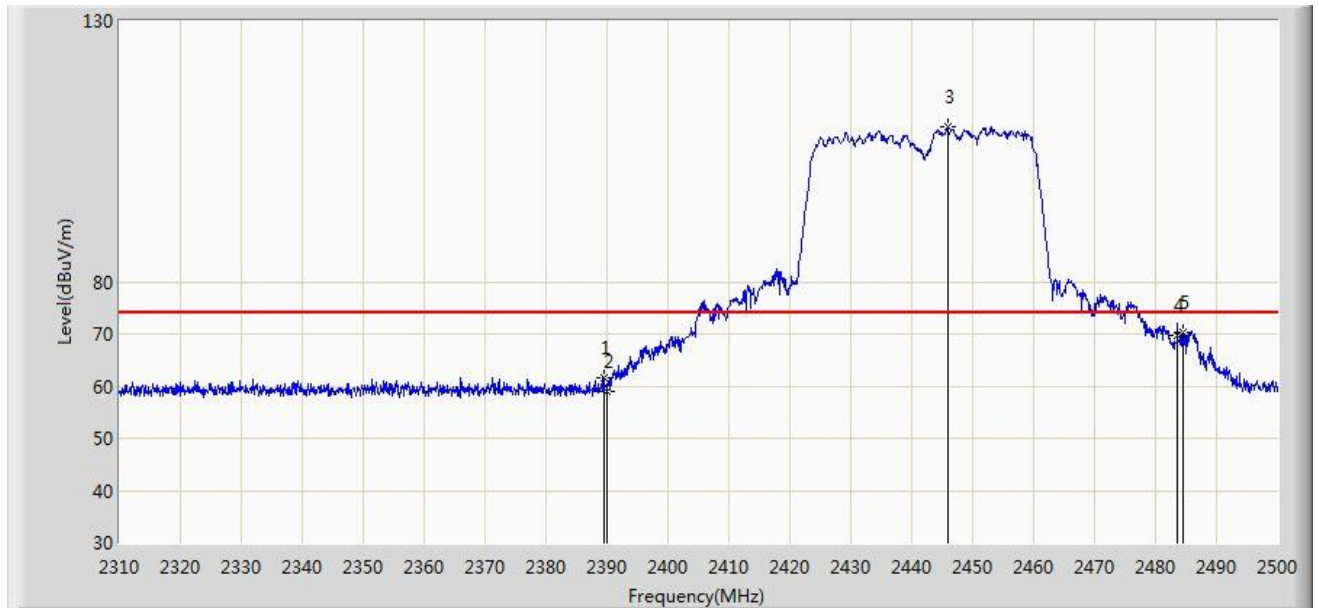


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.515	61.616	29.100	-12.384	74.000	32.517	PK
2			2390.000	59.030	26.512	-14.970	74.000	32.518	PK
3		*	2445.850	109.638	76.885	N/A	N/A	32.753	PK
4			2483.500	69.616	36.705	-4.384	74.000	32.911	PK
5			2484.515	70.433	37.518	-3.567	74.000	32.916	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 23:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11n-HT40 at channel 2442MHz Ant 0 + 1	

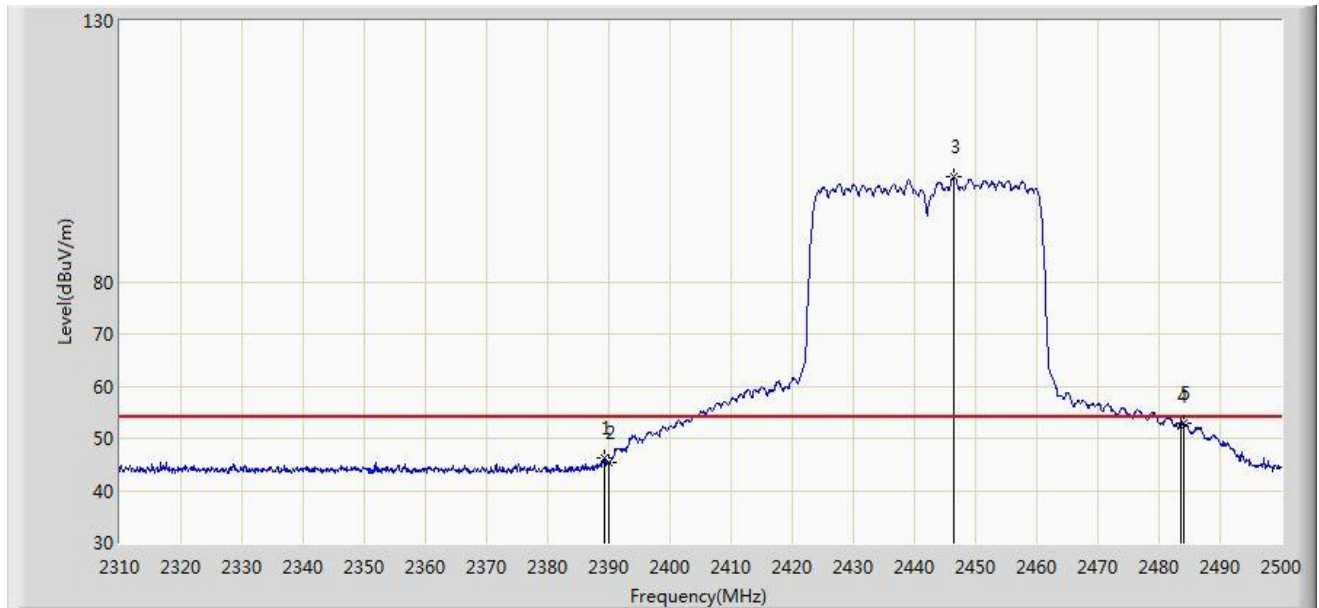


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.230	46.130	13.615	-7.870	54.000	32.515	AV
2			2390.000	45.258	12.740	-8.742	54.000	32.518	AV
3		*	2446.515	100.081	67.325	N/A	N/A	32.756	AV
4			2483.500	52.390	19.479	-1.610	54.000	32.911	AV
5			2484.040	53.024	20.111	-0.976	54.000	32.913	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 23:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11n-HT40 at channel 2442MHz Ant 0 + 1	

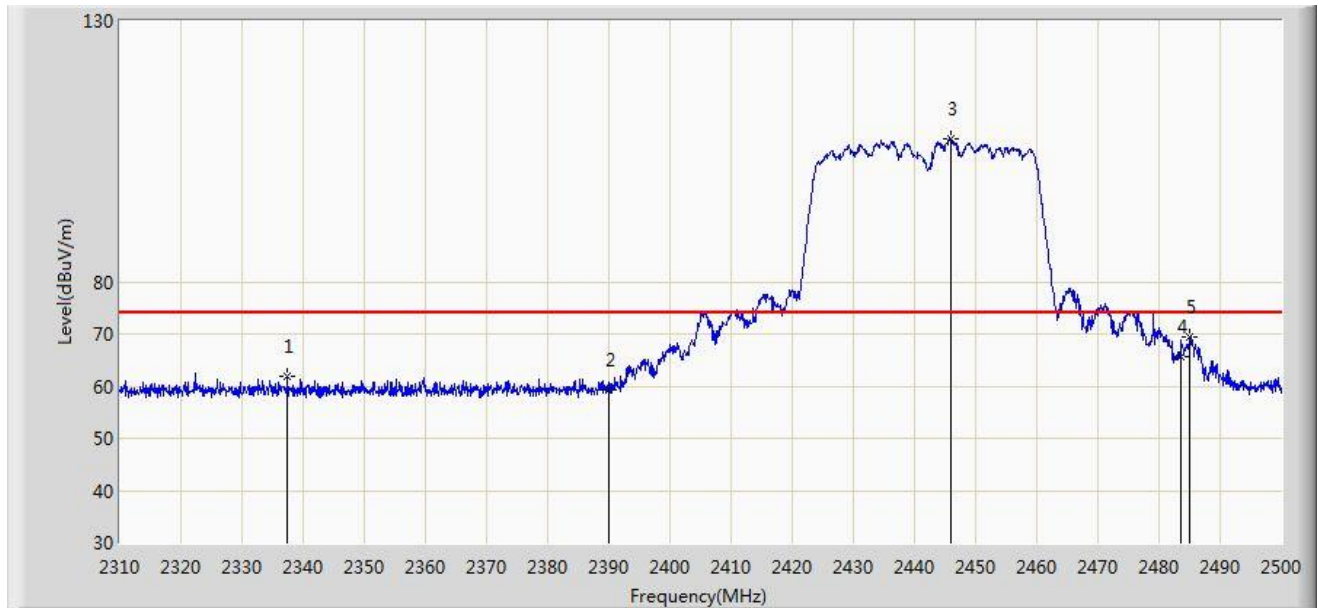


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2337.455	61.941	29.644	-12.059	74.000	32.297	PK
2			2390.000	59.259	26.741	-14.741	74.000	32.518	PK
3		*	2445.850	107.493	74.740	N/A	N/A	32.753	PK
4			2483.500	65.529	32.618	-8.471	74.000	32.911	PK
5			2485.085	69.512	36.594	-4.488	74.000	32.917	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 23:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11n-HT40 at channel 2442MHz Ant 0 + 1	

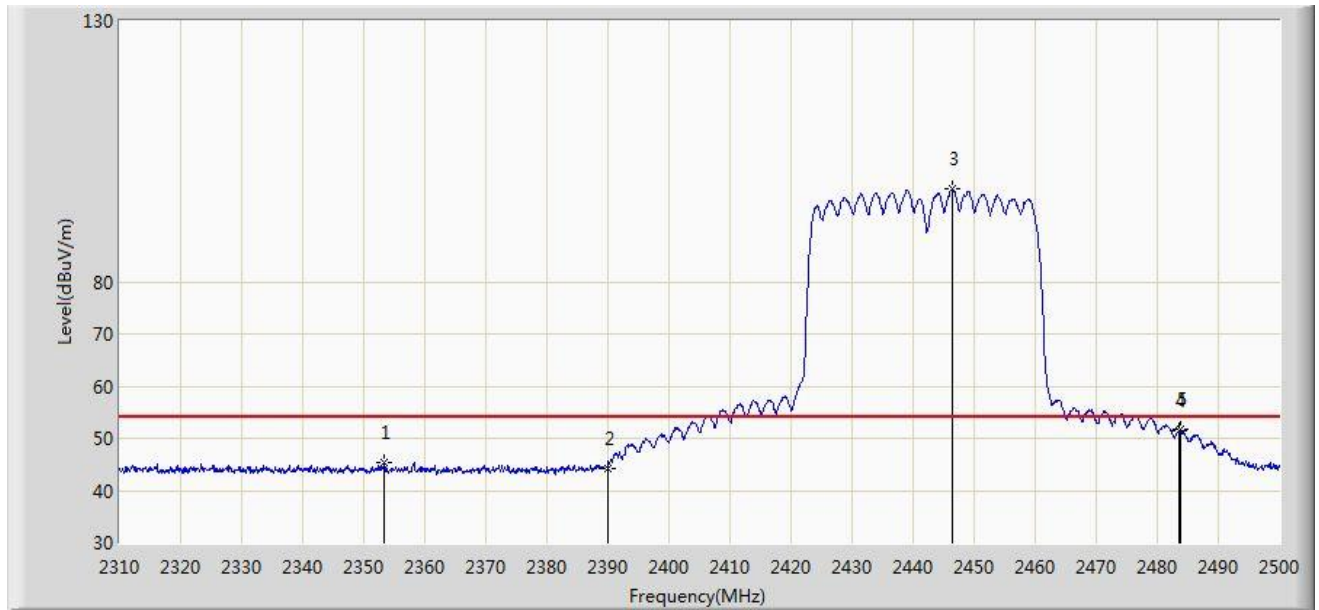


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2353.415	45.490	13.125	-8.510	54.000	32.364	AV
2			2390.000	44.330	11.812	-9.670	54.000	32.518	AV
3		*	2446.325	97.771	65.016	N/A	N/A	32.755	AV
4			2483.500	51.401	18.490	-2.599	54.000	32.911	AV
5			2483.850	51.608	18.696	-2.392	54.000	32.913	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 23:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11n-HT40 at channel 2447MHz Ant 0 + 1	

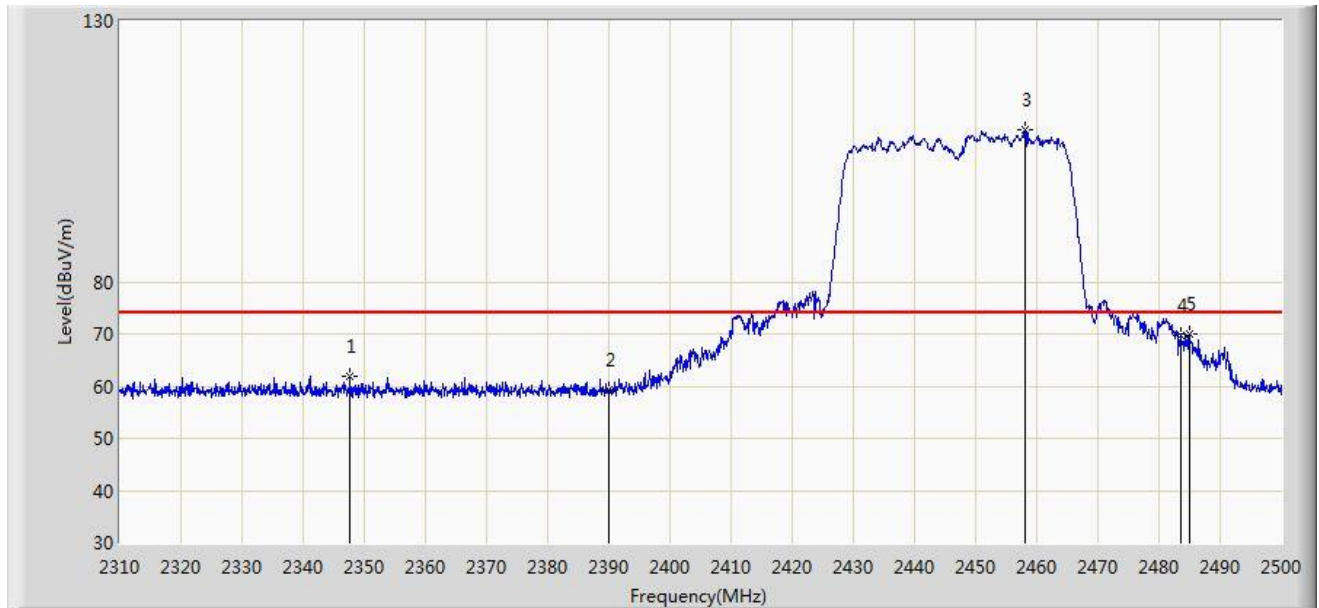


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2347.715	61.860	29.519	-12.140	74.000	32.340	PK
2			2390.000	59.283	26.765	-14.717	74.000	32.518	PK
3		*	2458.200	109.003	76.199	N/A	N/A	32.805	PK
4			2483.500	69.583	36.672	-4.417	74.000	32.911	PK
5			2484.990	69.978	37.061	-4.022	74.000	32.917	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 23:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11n-HT40 at channel 2447MHz Ant 0 + 1	

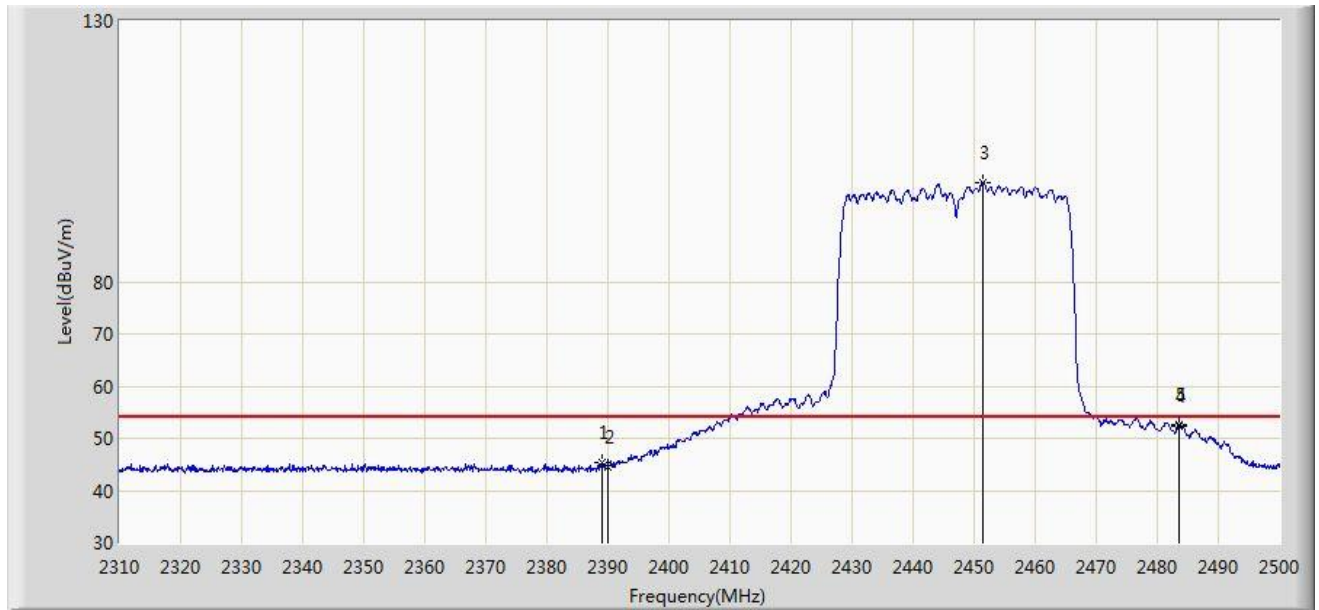


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.135	45.391	12.877	-8.609	54.000	32.514	AV
2			2390.000	44.505	11.987	-9.495	54.000	32.518	AV
3		*	2451.360	98.898	66.122	N/A	N/A	32.776	AV
4			2483.500	52.277	19.366	-1.723	54.000	32.911	AV
5			2483.565	52.636	19.725	-1.364	54.000	32.911	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 23:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11n-HT40 at channel 2447MHz Ant 0 + 1	

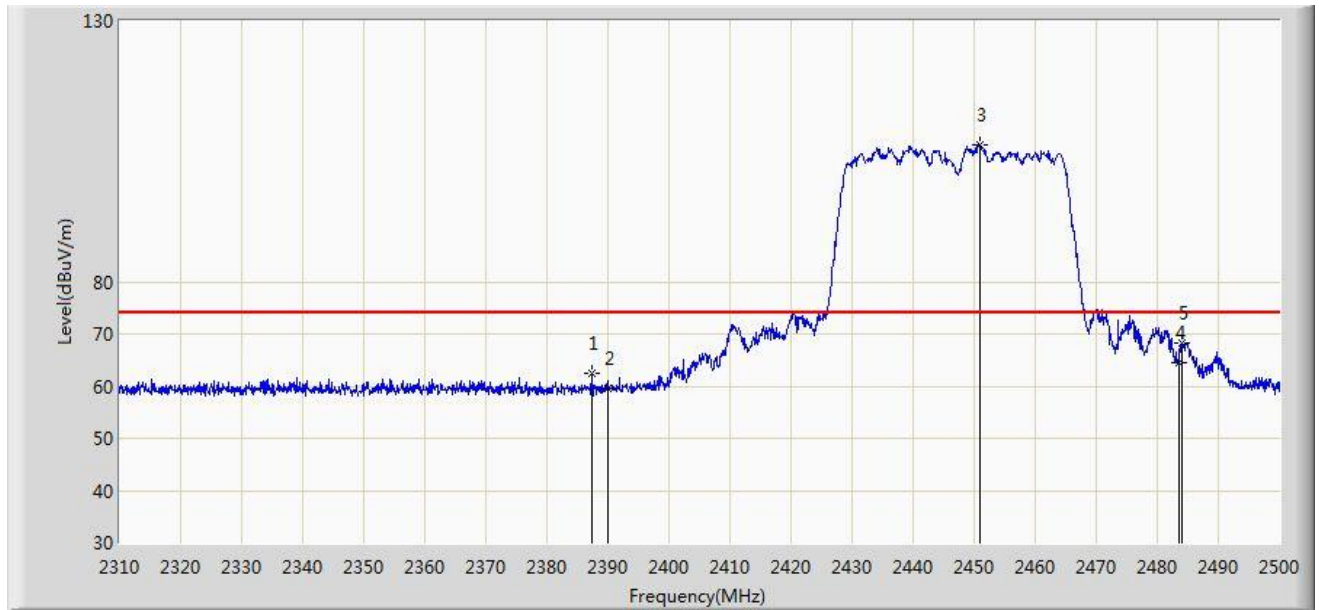


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.425	62.446	29.939	-11.554	74.000	32.507	PK
2			2390.000	59.515	26.997	-14.485	74.000	32.518	PK
3		*	2450.885	106.248	73.474	N/A	N/A	32.774	PK
4			2483.500	64.357	31.446	-9.643	74.000	32.911	PK
5			2484.135	68.347	35.433	-5.653	74.000	32.913	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 23:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11n-HT40 at channel 2447MHz Ant 0 + 1	

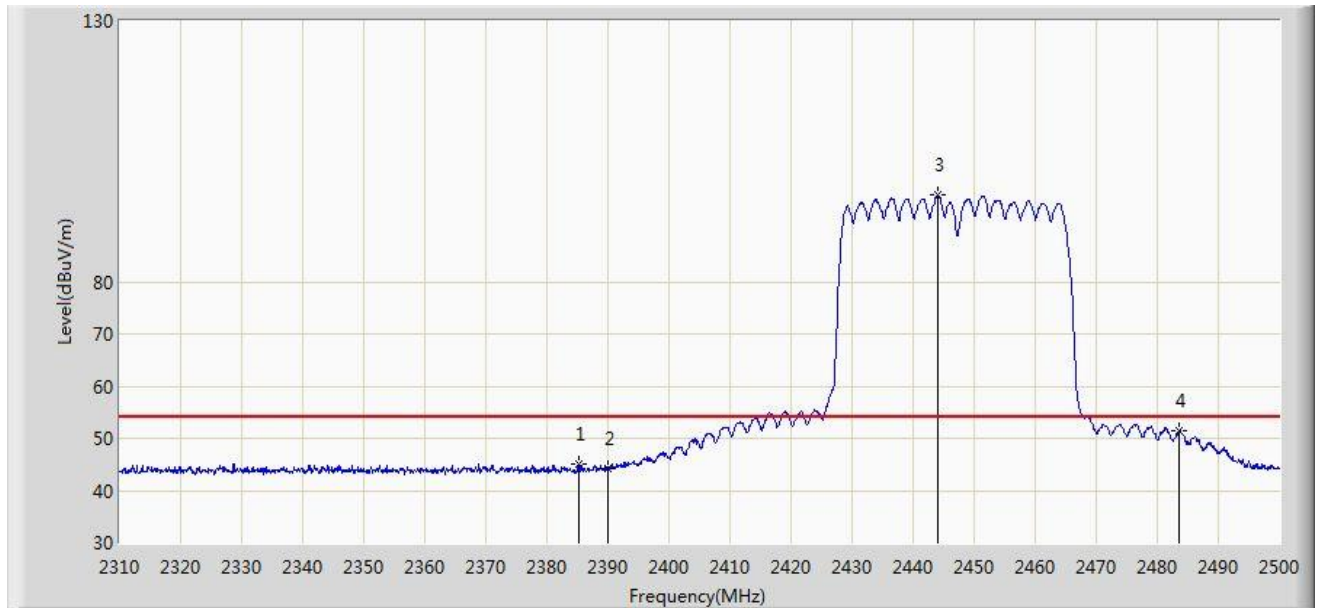


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.145	45.158	12.660	-8.842	54.000	32.497	AV
2			2390.000	44.184	11.666	-9.816	54.000	32.518	AV
3		*	2444.045	96.631	63.886	N/A	N/A	32.745	AV
4			2483.500	51.318	18.407	-2.682	54.000	32.911	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT40 at channel 2452MHz Ant 0 + 1	

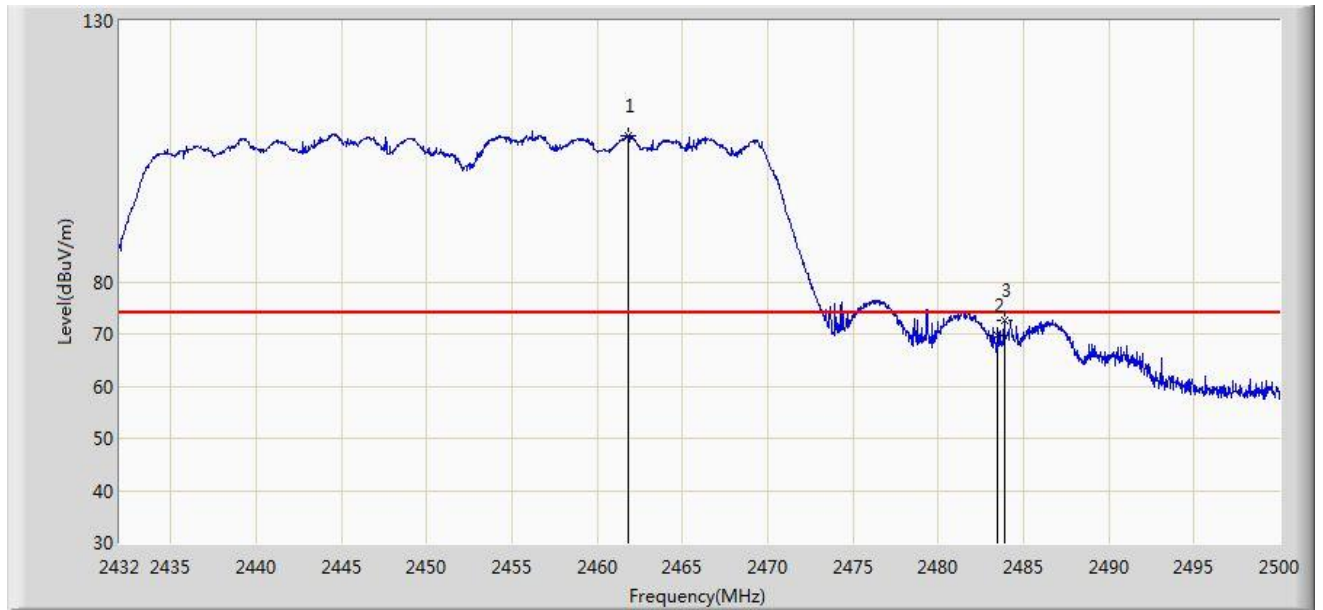


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.852	108.113	75.293	N/A	N/A	32.820	PK
2			2483.500	69.702	36.791	-4.298	74.000	32.911	PK
3			2483.884	72.737	39.824	-1.263	74.000	32.913	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT40 at channel 2452MHz Ant 0 + 1	

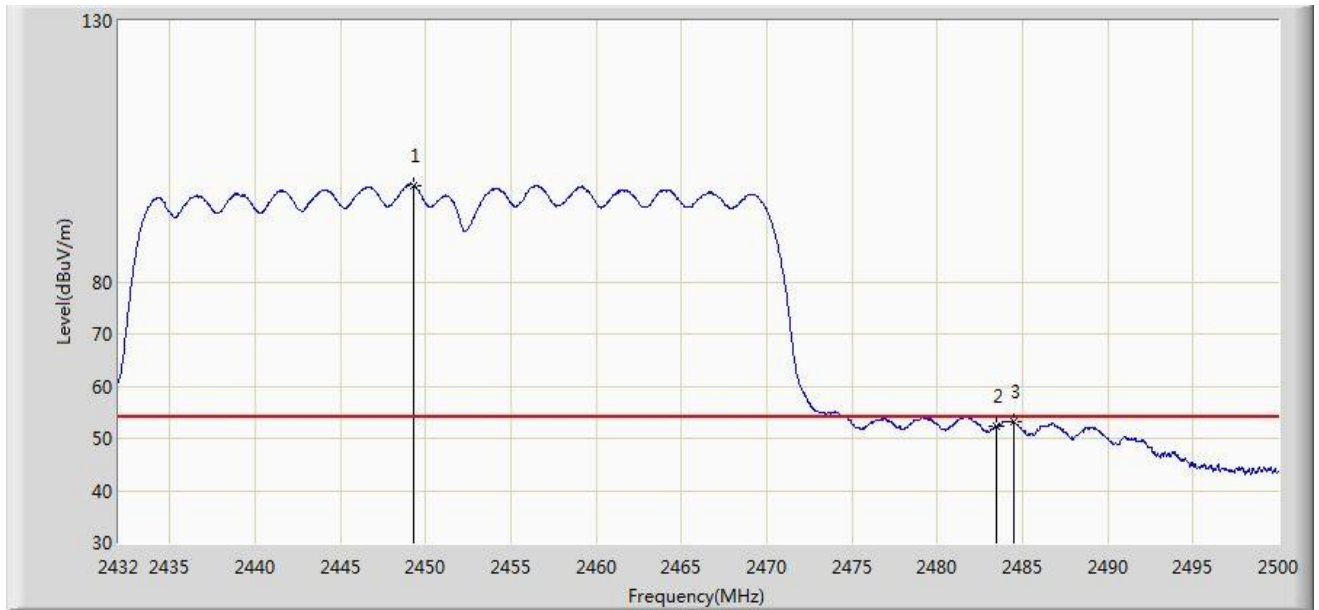

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2449.306	98.482	65.715	N/A	N/A	32.768	AV
2			2483.500	52.339	19.428	-1.661	54.000	32.911	AV
3			2484.462	53.162	20.247	-0.838	54.000	32.915	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT40 at channel 2452MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2446.654	105.713	72.957	N/A	N/A	32.756	PK
2			2483.500	66.157	33.246	-7.843	74.000	32.911	PK
3			2484.802	71.180	38.264	-2.820	74.000	32.916	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11n-HT40 at channel 2452MHz Ant 0 + 1	

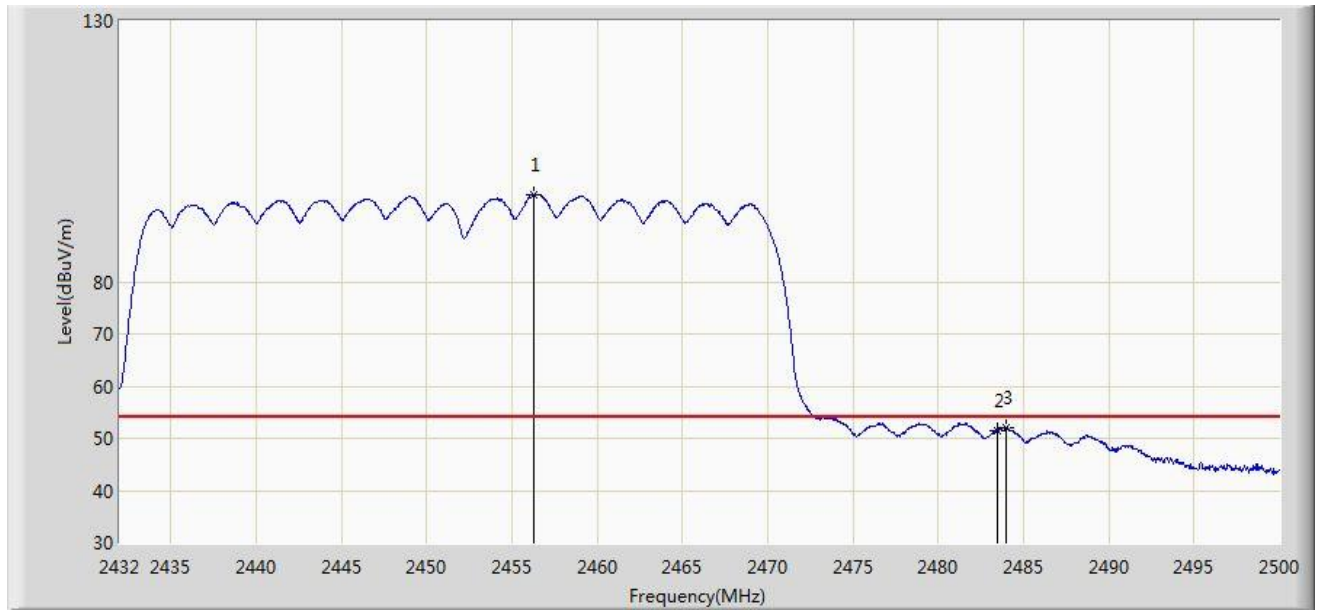

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.276	96.677	63.881	N/A	N/A	32.797	AV
2			2483.500	51.566	18.655	-2.434	54.000	32.911	AV
3			2483.986	51.911	18.998	-2.089	54.000	32.913	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE20 at channel 2412MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	72.908	40.391	-1.092	74.000	32.517	PK
2			2390.000	70.860	38.342	-3.140	74.000	32.518	PK
3		*	2409.064	115.383	82.785	N/A	N/A	32.598	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE20 at channel 2412MHz Ant 0 + 1	

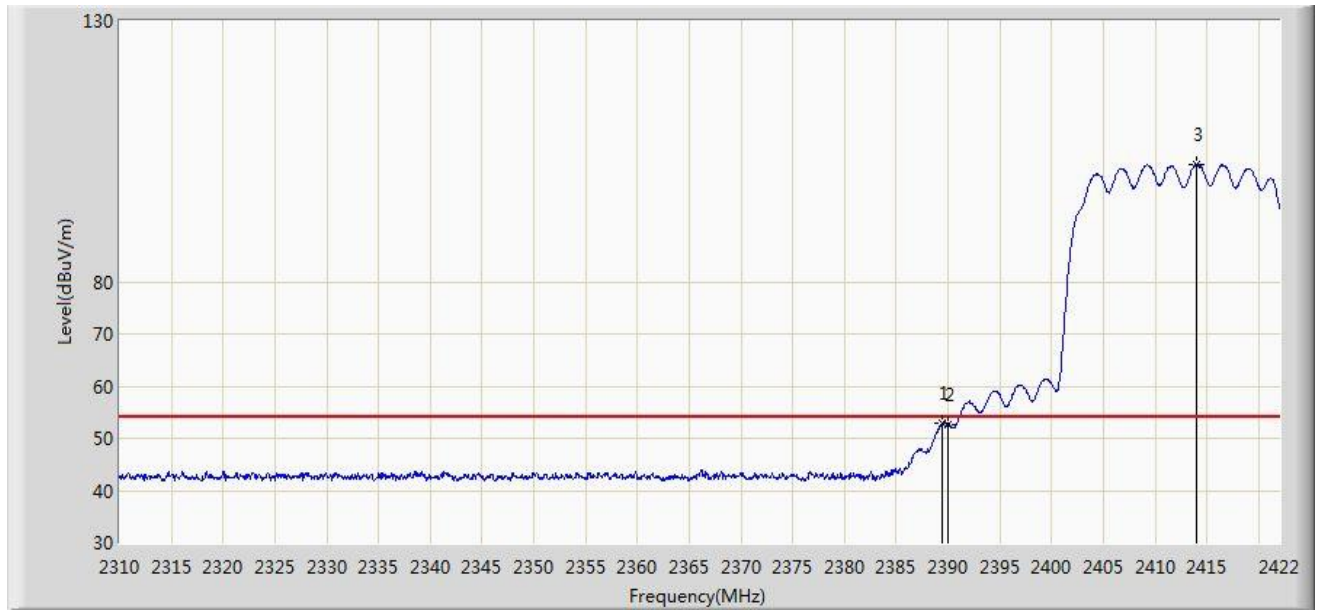


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.408	52.888	20.372	-1.112	54.000	32.515	AV
2			2390.000	52.537	20.019	-1.463	54.000	32.518	AV
3		*	2413.936	102.463	69.845	N/A	N/A	32.618	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE20 at channel 2412MHz Ant 0 + 1	

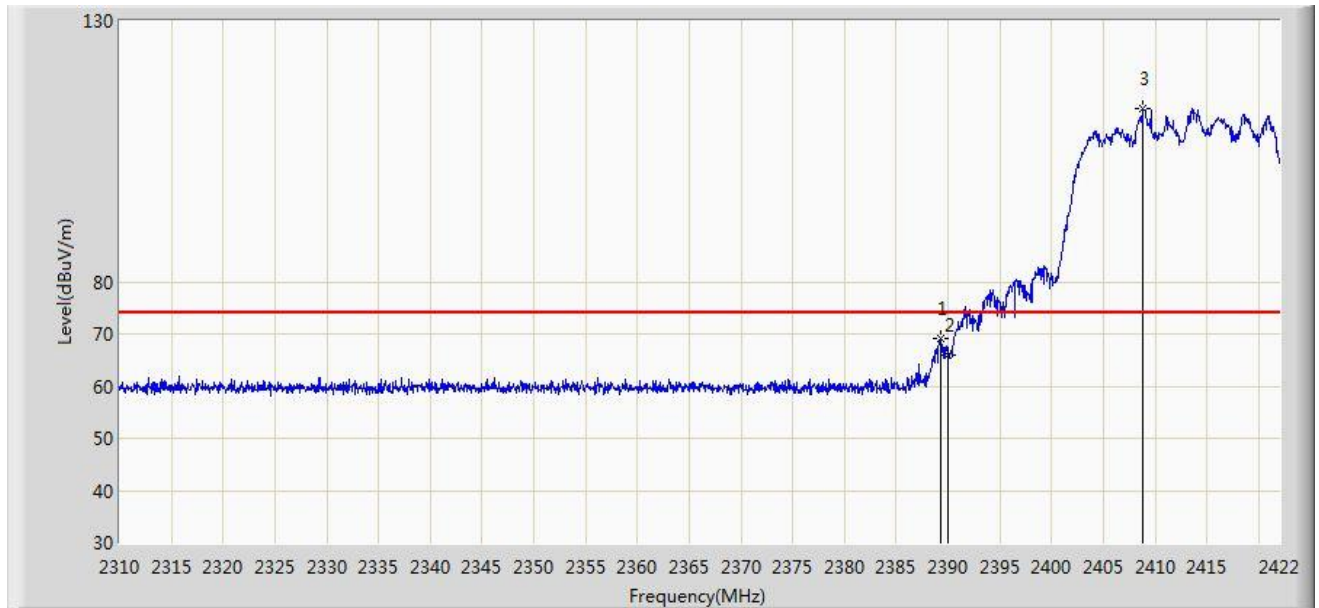


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.296	69.252	36.737	-4.748	74.000	32.515	PK
2			2390.000	65.942	33.424	-8.058	74.000	32.518	PK
3		*	2408.840	113.173	80.576	N/A	N/A	32.597	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE20 at channel 2412MHz Ant 0 + 1	

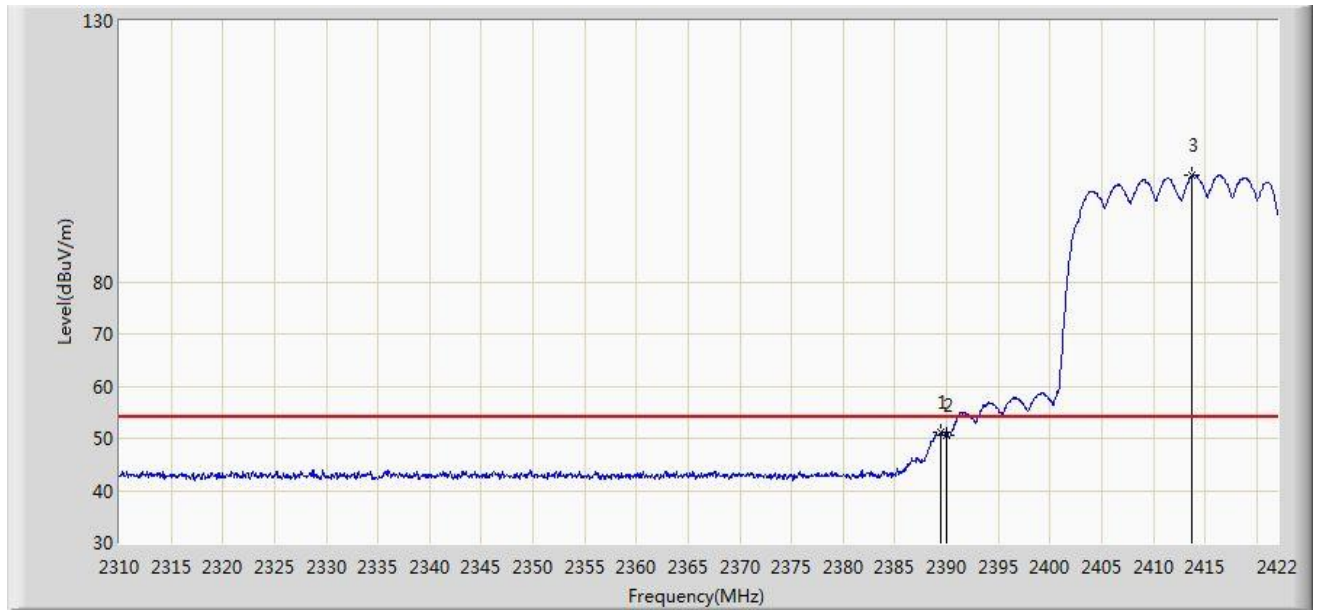


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.408	51.039	18.523	-2.961	54.000	32.515	AV
2			2390.000	50.709	18.191	-3.291	54.000	32.518	AV
3		*	2413.768	100.345	67.728	N/A	N/A	32.617	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 23:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11ax-HE20 at channel 2457MHz Ant 0 + 1	

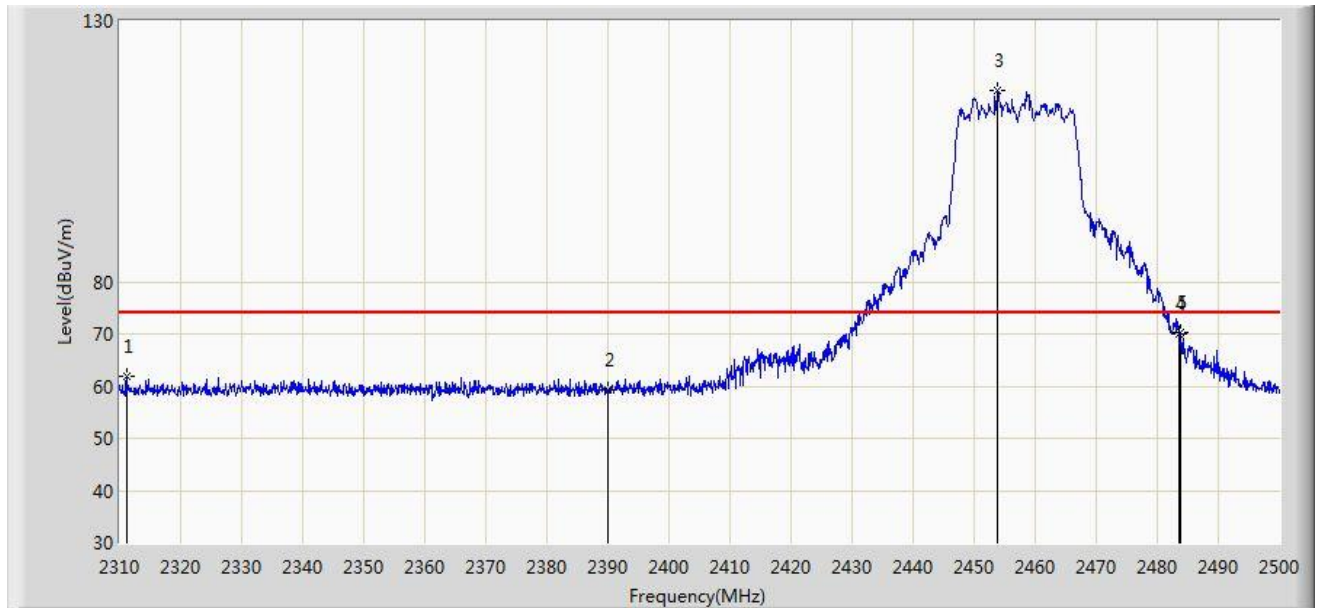


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2311.140	61.835	29.648	-12.165	74.000	32.186	PK
2			2390.000	59.158	26.640	-14.842	74.000	32.518	PK
3		*	2453.735	116.679	83.893	N/A	N/A	32.786	PK
4			2483.500	70.080	37.169	-3.920	74.000	32.911	PK
5			2483.850	70.176	37.264	-3.824	74.000	32.913	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/02 - 23:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11ax-HE20 at channel 2457MHz Ant 0 + 1	

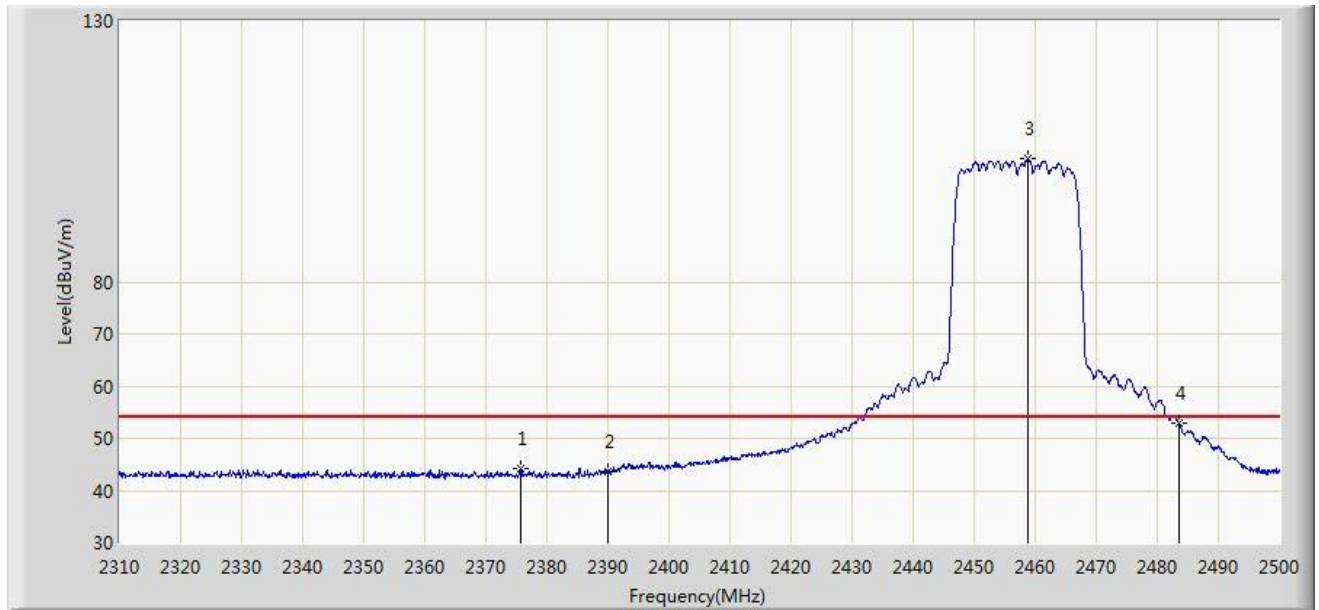

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2375.740	44.270	11.812	-9.730	54.000	32.458	AV
2			2390.000	43.553	11.035	-10.447	54.000	32.518	AV
3		*	2458.770	103.506	70.699	N/A	N/A	32.807	AV
4			2483.500	53.004	20.093	-0.996	54.000	32.911	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/03 - 00:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11ax-HE20 at channel 2457MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2362.725	61.560	29.156	-12.440	74.000	32.404	PK
2			2390.000	60.015	27.497	-13.985	74.000	32.518	PK
3		*	2450.030	113.361	80.591	N/A	N/A	32.770	PK
4			2483.500	65.830	32.919	-8.170	74.000	32.911	PK
5			2484.610	65.994	33.078	-8.006	74.000	32.916	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/03 - 00:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11ax-HE20 at channel 2457MHz Ant 0 + 1	

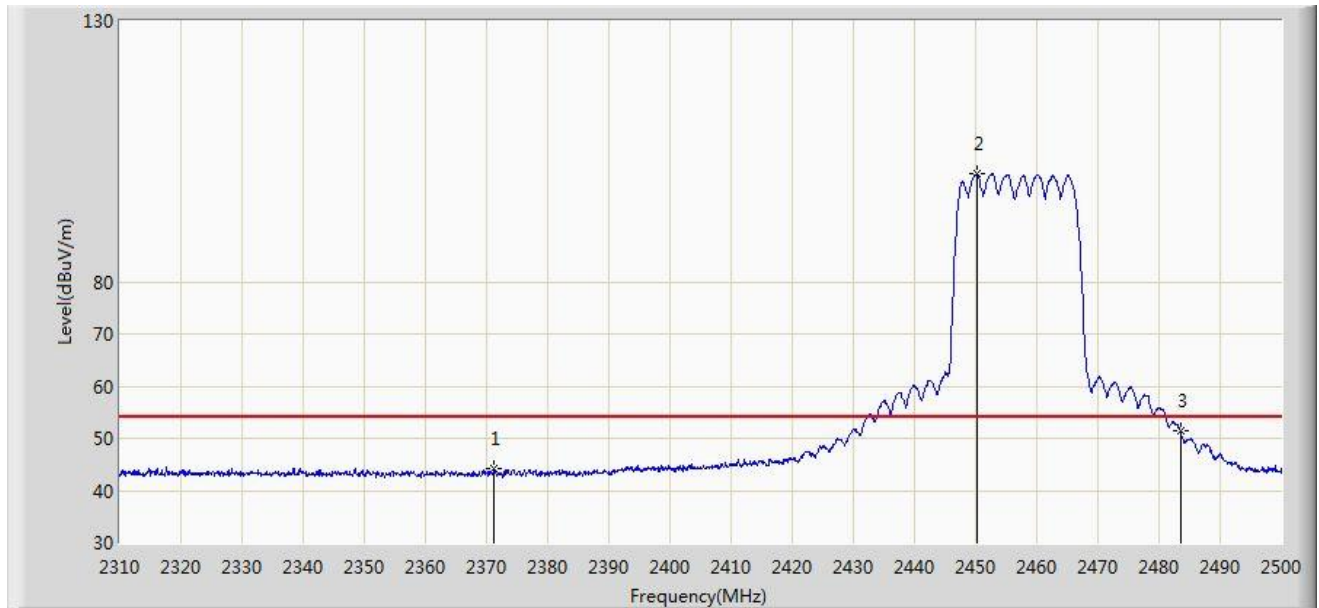


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2371.180	44.324	11.885	-9.676	54.000	32.439	AV
2		*	2450.125	100.693	67.922	N/A	N/A	32.770	AV
3			2483.500	51.403	18.492	-2.597	54.000	32.911	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE20 at channel 2462MHz Ant 0 + 1	

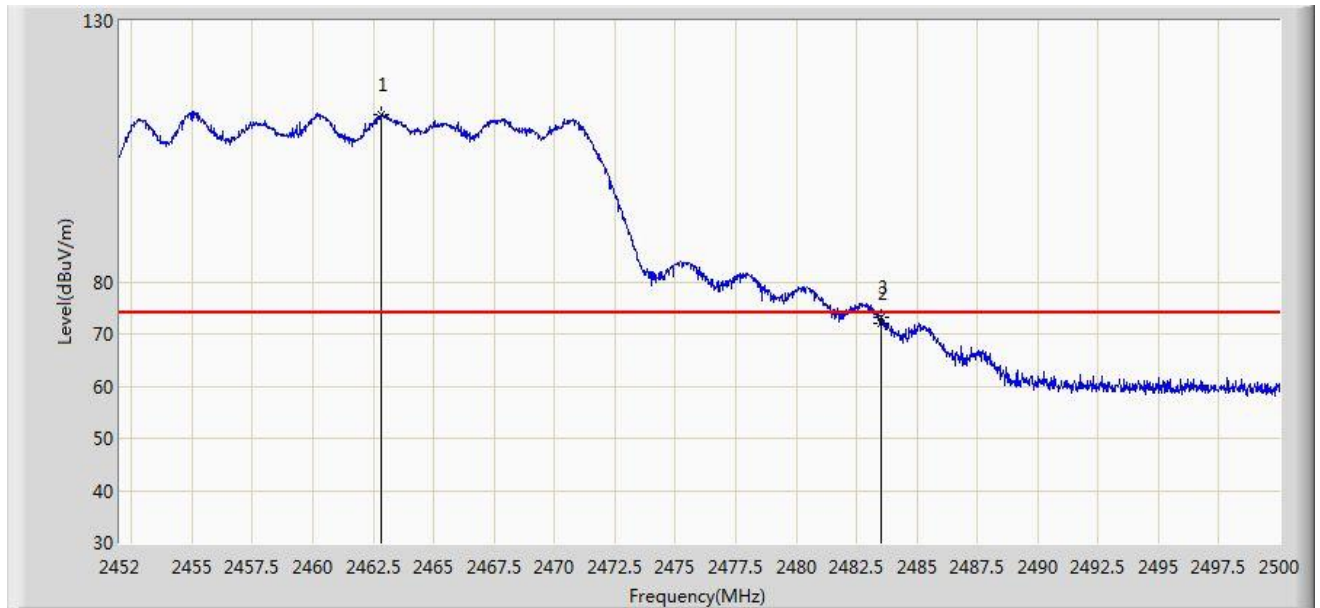


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.848	111.889	79.065	N/A	N/A	32.824	PK
2			2483.500	72.114	39.203	-1.886	74.000	32.911	PK
3			2483.536	73.132	40.221	-0.868	74.000	32.911	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE20 at channel 2462MHz Ant 0 + 1	

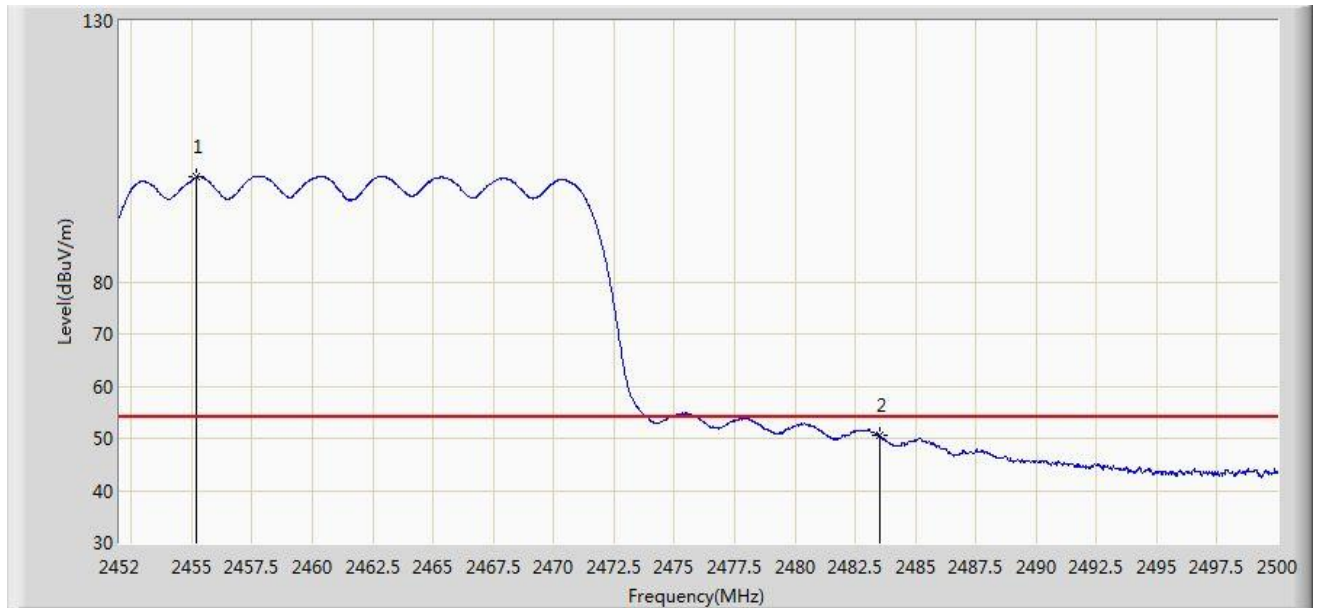

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.216	100.092	67.300	N/A	N/A	32.792	AV
2			2483.500	50.562	17.651	-3.438	54.000	32.911	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE20 at channel 2462MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.072	110.974	78.183	N/A	N/A	32.791	PK
2			2483.500	69.316	36.405	-4.684	74.000	32.911	PK
3			2483.608	70.218	37.307	-3.782	74.000	32.912	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 21:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE20 at channel 2462MHz Ant 0 + 1	

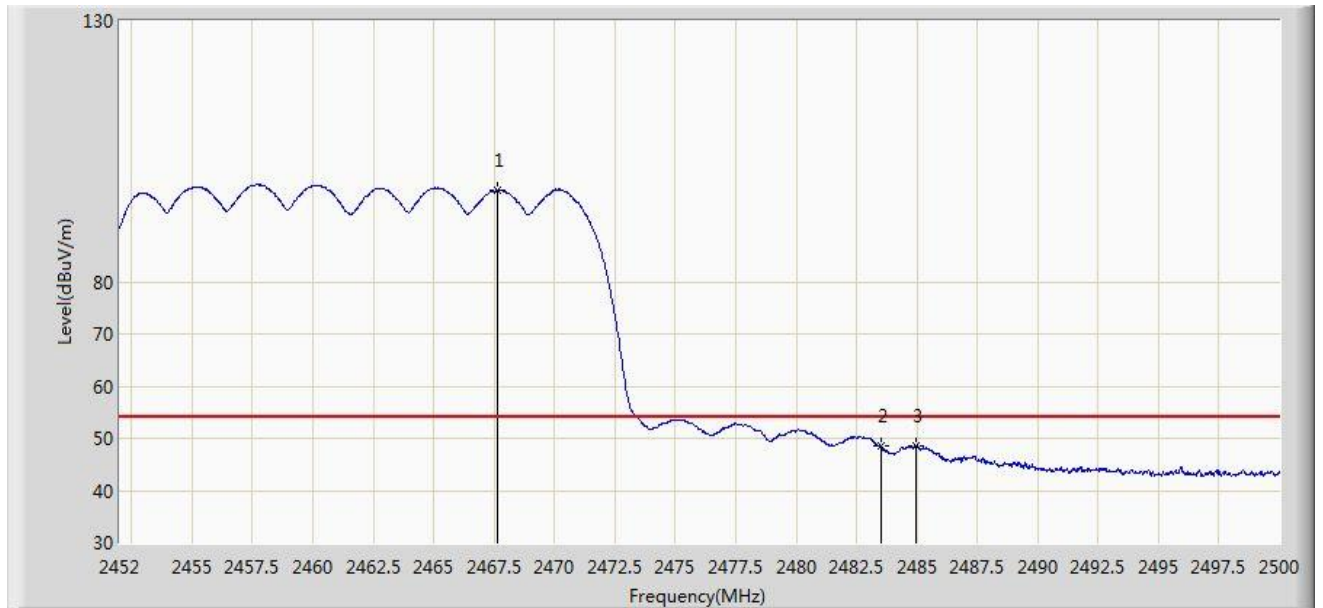


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.648	97.575	64.731	N/A	N/A	32.844	AV
2			2483.500	48.451	15.540	-5.549	54.000	32.911	AV
3			2484.976	48.481	15.564	-5.519	54.000	32.917	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 22:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE40 at channel 2422MHz Ant 0 + 1	

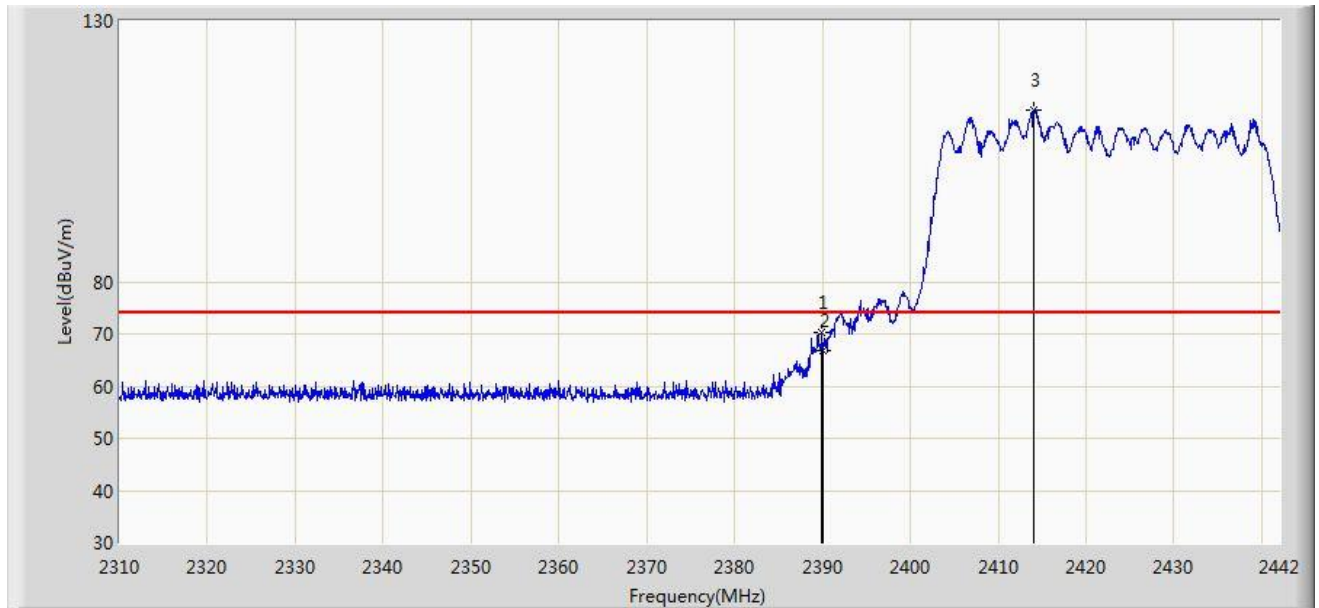


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.926	70.338	37.820	-3.662	74.000	32.518	PK
2			2390.000	66.837	34.319	-7.163	74.000	32.518	PK
3		*	2414.016	112.976	80.357	N/A	N/A	32.618	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 22:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE40 at channel 2422MHz Ant 0 + 1	

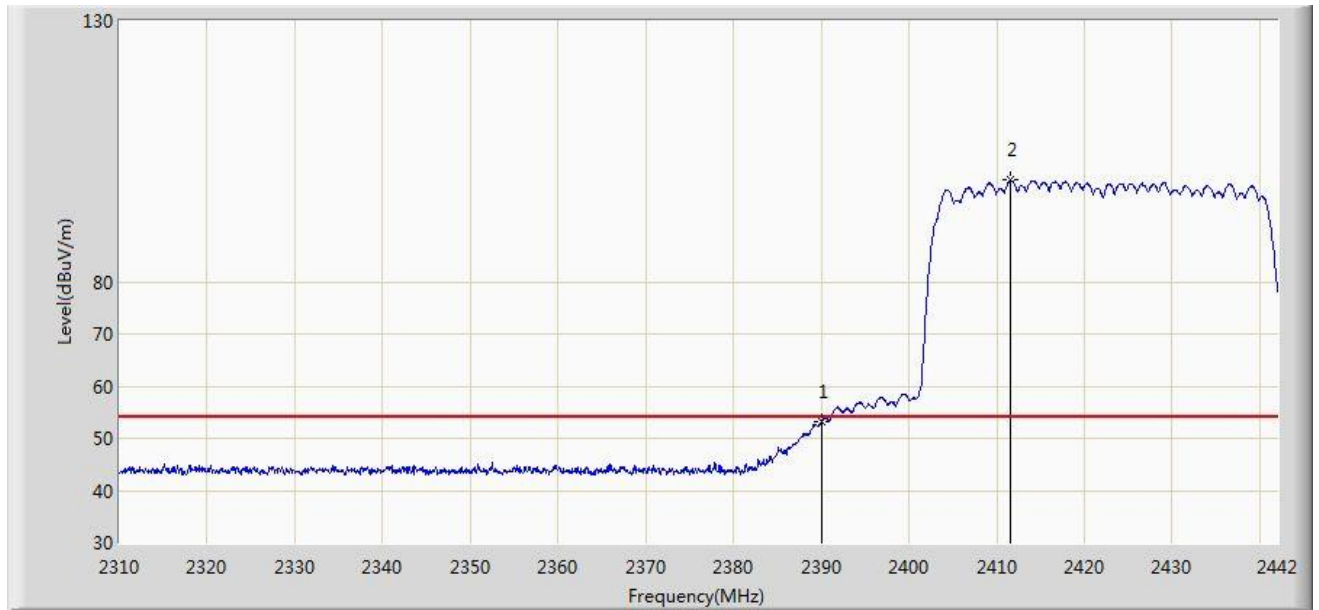


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.130	20.612	-0.870	54.000	32.518	AV
2		*	2411.574	99.423	66.815	N/A	N/A	32.608	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 22:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE40 at channel 2422MHz Ant 0 + 1	

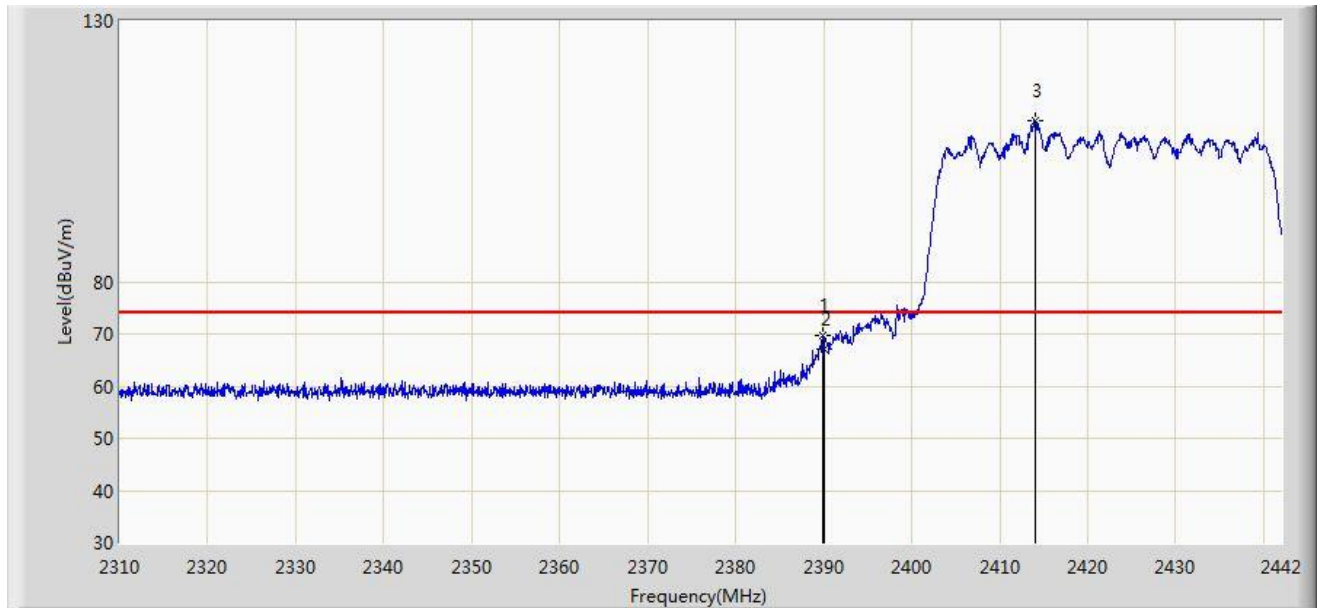


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.926	69.676	37.158	-4.324	74.000	32.518	PK
2			2390.000	67.018	34.500	-6.982	74.000	32.518	PK
3		*	2414.016	110.917	78.298	N/A	N/A	32.618	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 22:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE40 at channel 2422MHz Ant 0 + 1	

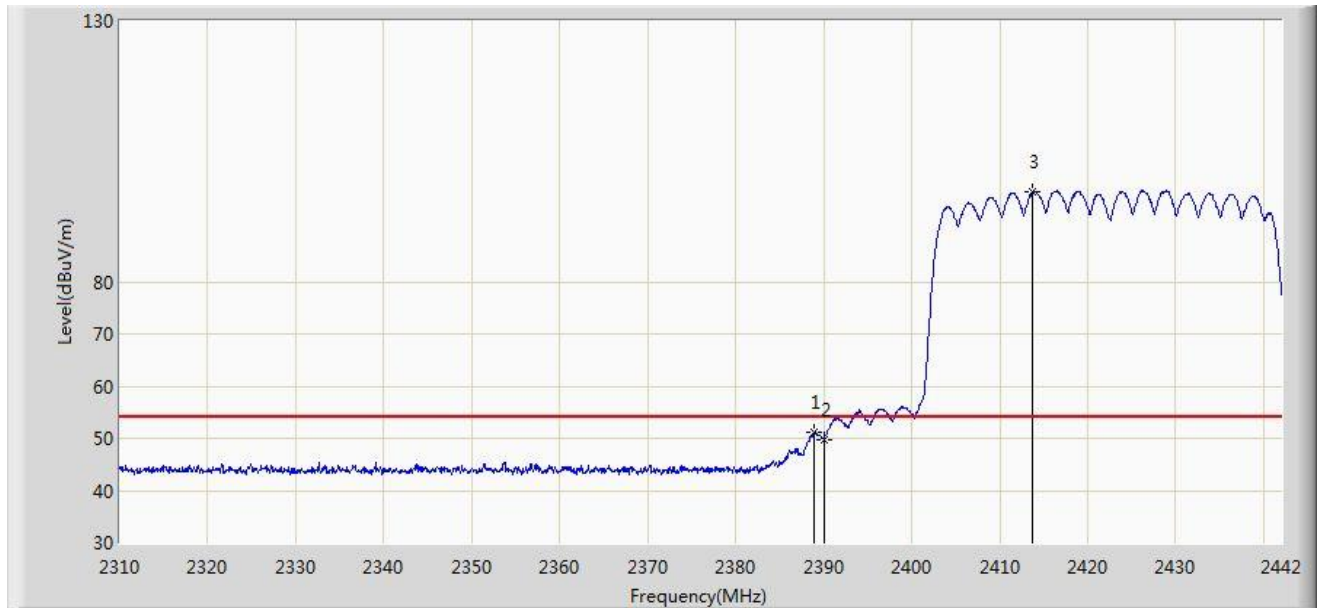


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.870	51.072	18.559	-2.928	54.000	32.514	AV
2			2390.000	49.797	17.279	-4.203	54.000	32.518	AV
3		*	2413.752	97.292	64.675	N/A	N/A	32.617	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/03 - 00:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11ax-HE40 at channel 2442MHz Ant 0 + 1	

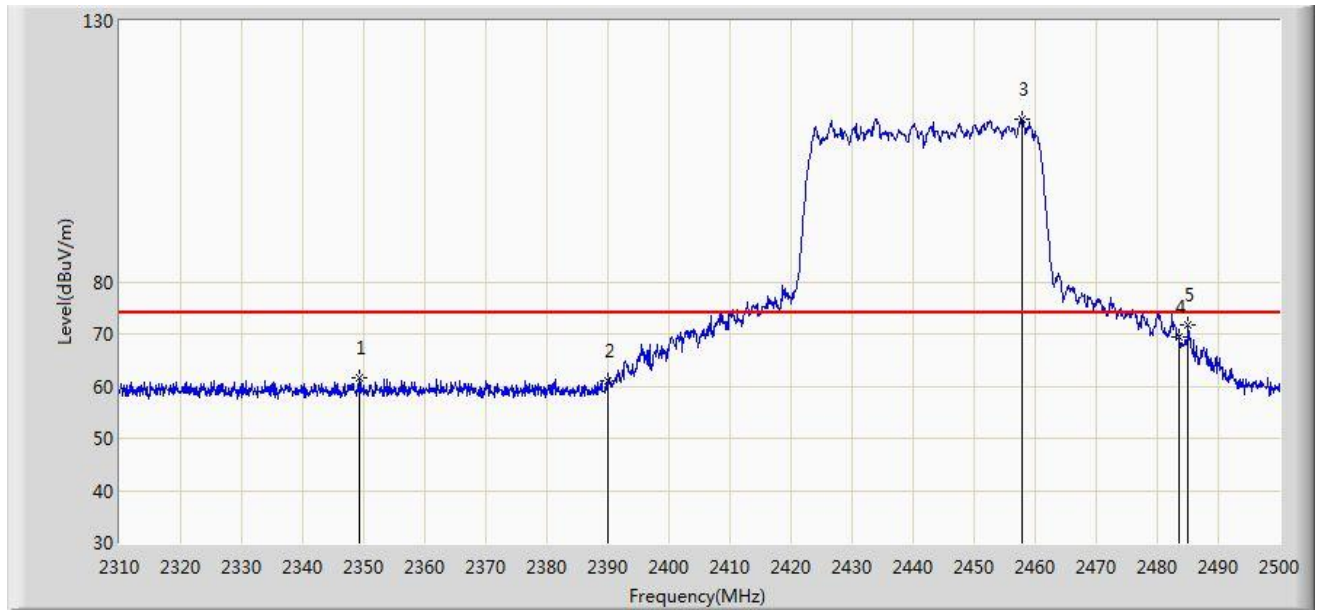


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2349.235	61.712	29.365	-12.288	74.000	32.347	PK
2			2390.000	60.947	28.429	-13.053	74.000	32.518	PK
3		*	2457.820	111.244	78.441	N/A	N/A	32.802	PK
4			2483.500	69.368	36.457	-4.632	74.000	32.911	PK
5			2485.085	71.665	38.747	-2.335	74.000	32.917	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/03 - 00:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11ax-HE40 at channel 2442MHz Ant 0 + 1	

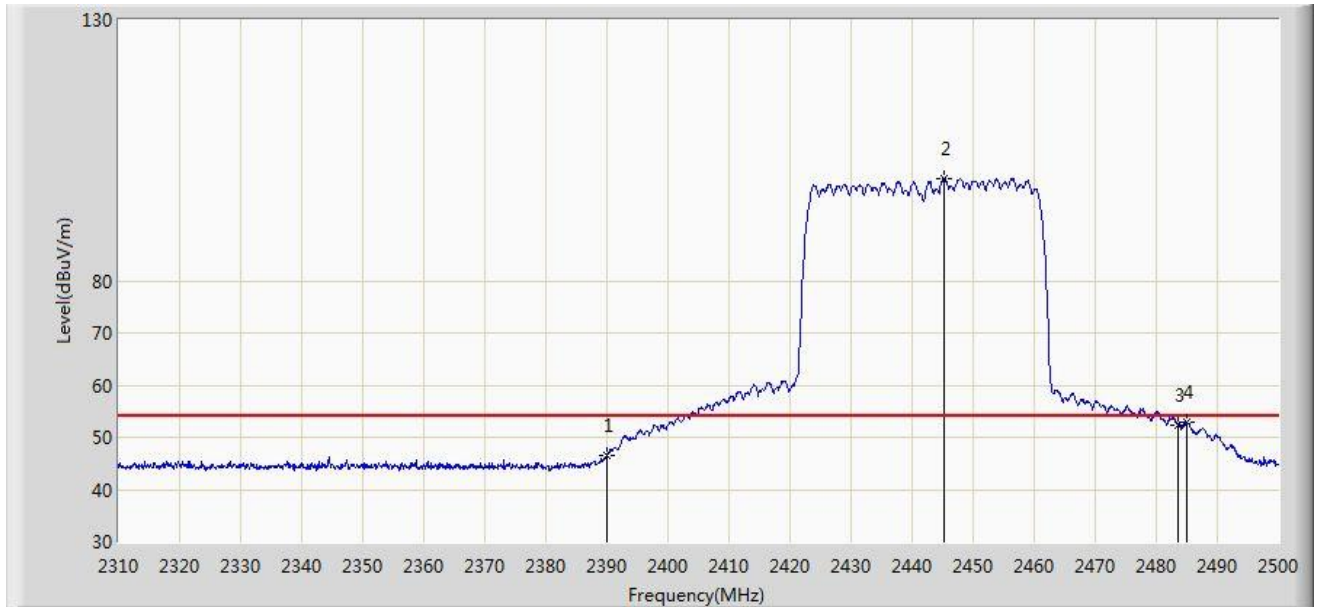


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.647	14.129	-7.353	54.000	32.518	AV
2		*	2445.185	99.654	66.904	N/A	N/A	32.751	AV
3			2483.500	52.395	19.484	-1.605	54.000	32.911	AV
4			2485.085	52.928	20.010	-1.072	54.000	32.917	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/03 - 00:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11ax-HE40 at channel 2442MHz Ant 0 + 1	

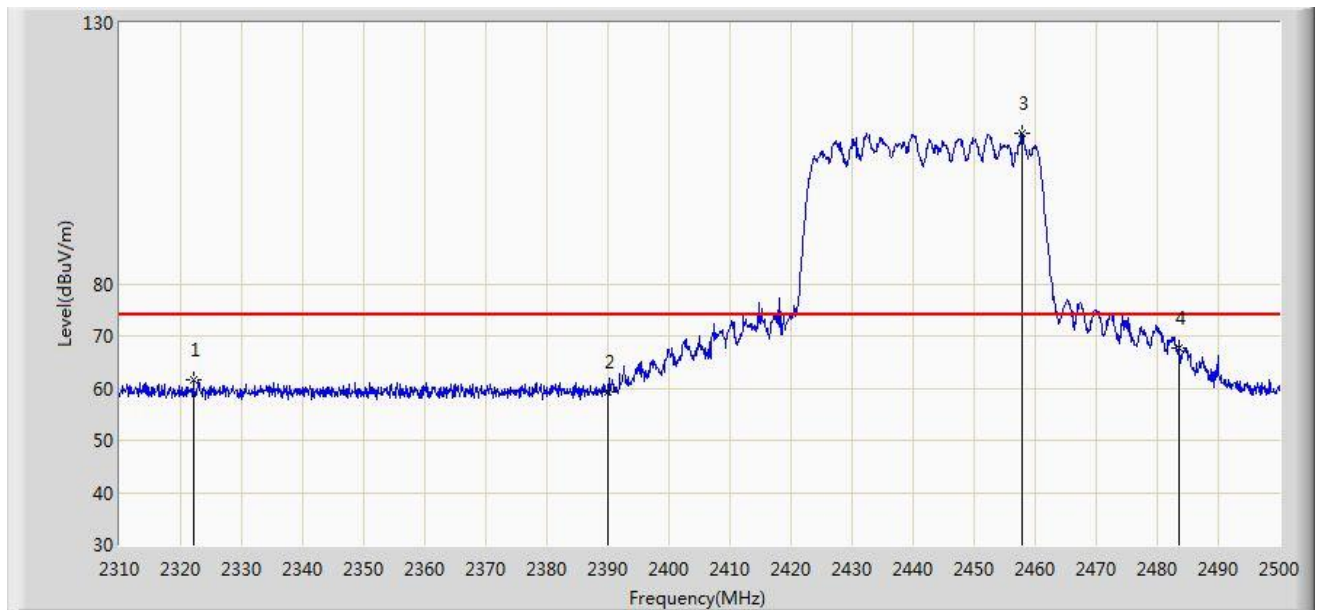


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2322.065	61.629	29.397	-12.371	74.000	32.232	PK
2			2390.000	59.160	26.642	-14.840	74.000	32.518	PK
3		*	2457.820	108.969	76.166	N/A	N/A	32.802	PK
4			2483.500	67.550	34.639	-6.450	74.000	32.911	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/03 - 00:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11ax-HE40 at channel 2442MHz Ant 0 + 1	

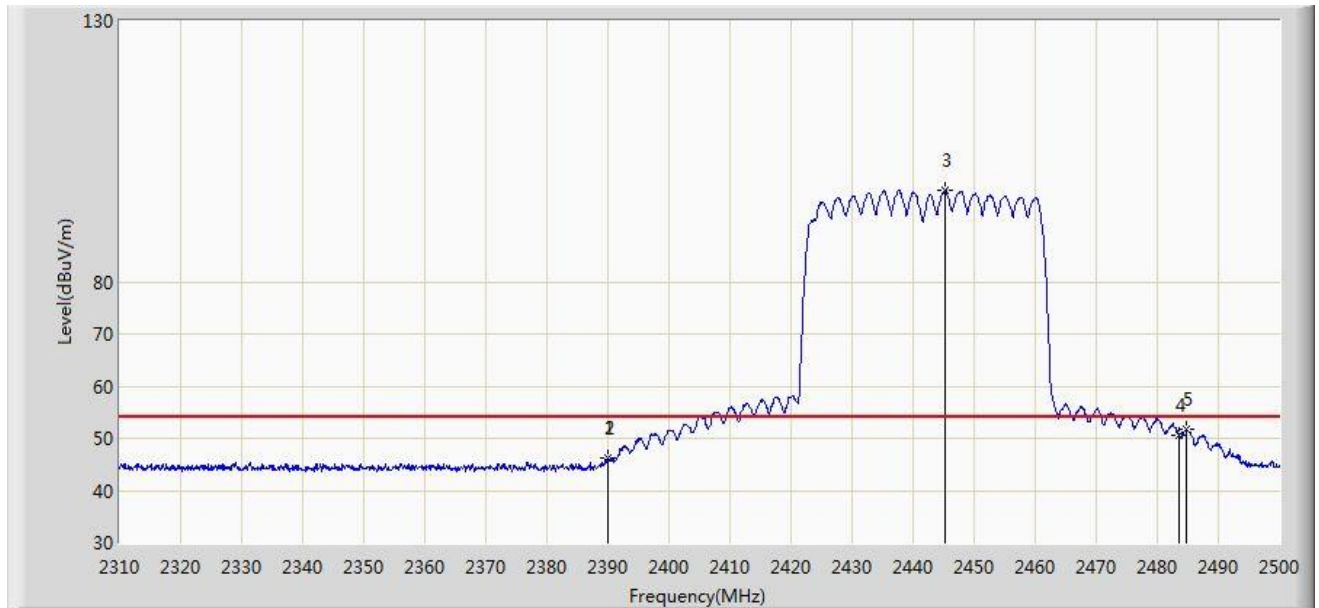


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.990	46.224	13.706	-7.776	54.000	32.518	AV
2			2390.000	46.169	13.651	-7.831	54.000	32.518	AV
3		*	2445.280	97.539	64.788	N/A	N/A	32.751	AV
4			2483.500	50.642	17.731	-3.358	54.000	32.911	AV
5			2484.705	51.715	18.799	-2.285	54.000	32.916	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/03 - 00:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11ax-HE40 at channel 2447MHz Ant 0 + 1	

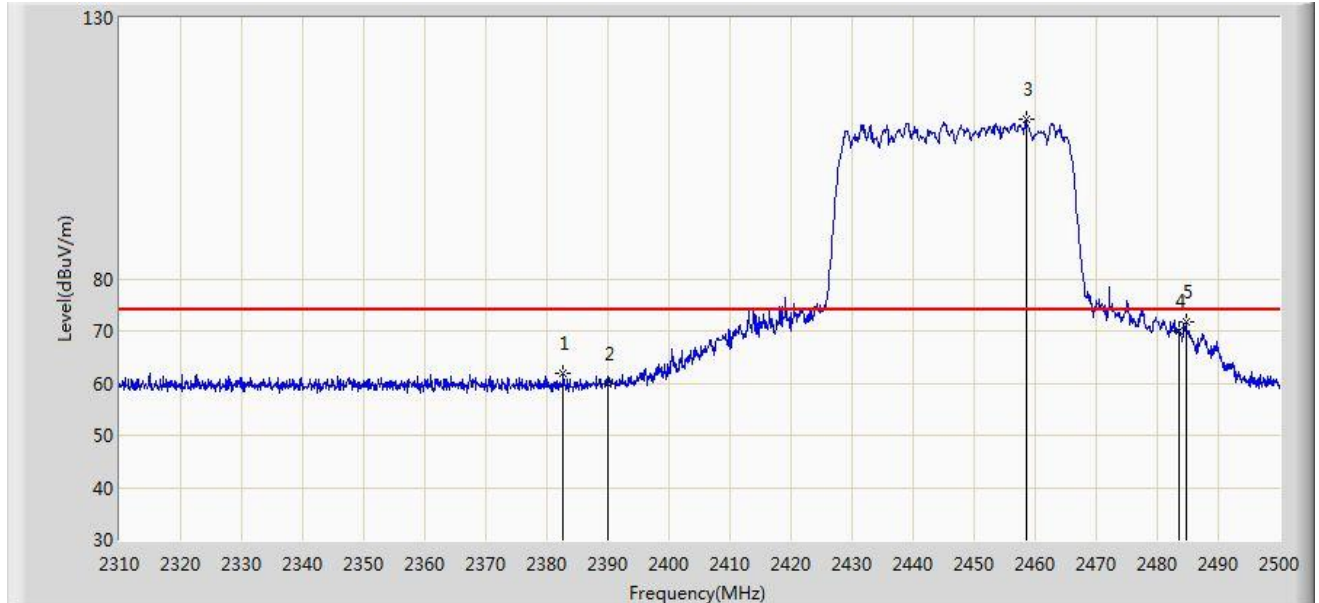


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2382.675	61.920	29.433	-12.080	74.000	32.487	PK
2			2390.000	59.801	27.283	-14.199	74.000	32.518	PK
3		*	2458.580	110.717	77.911	N/A	N/A	32.806	PK
4			2483.500	70.028	37.117	-3.972	74.000	32.911	PK
5			2484.705	71.666	38.750	-2.334	74.000	32.916	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/03 - 00:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11ax-HE40 at channel 2447MHz Ant 0 + 1	

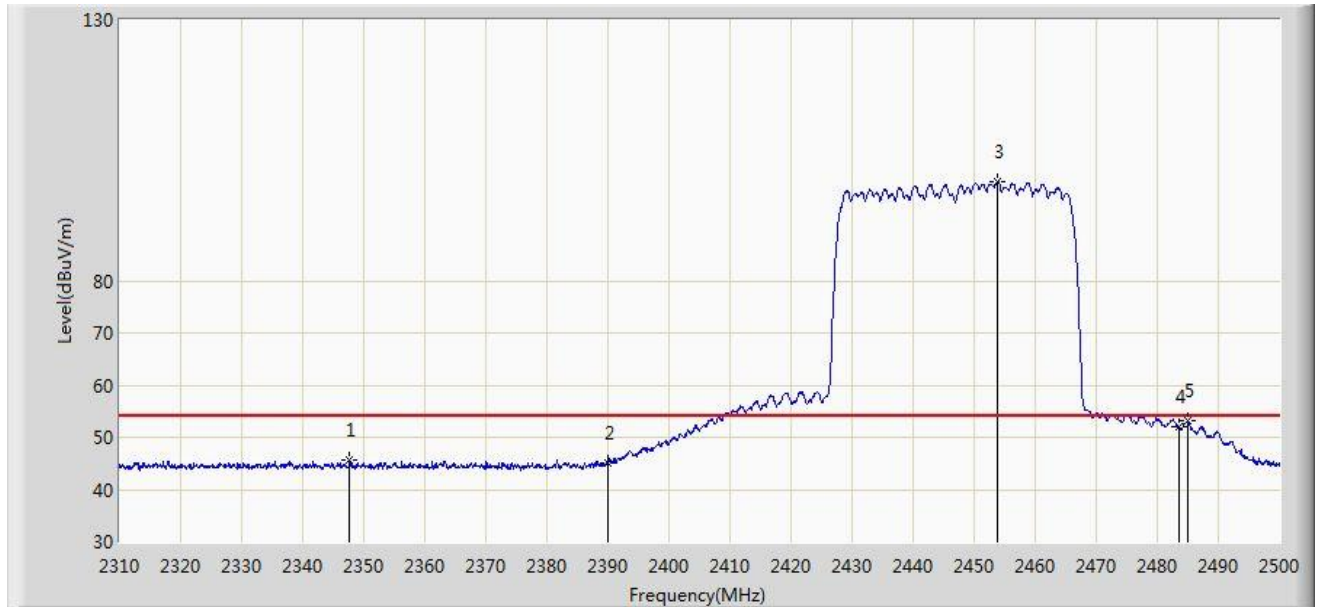


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2347.715	45.738	13.397	-8.262	54.000	32.340	AV
2			2390.000	45.097	12.579	-8.903	54.000	32.518	AV
3		*	2453.925	99.028	66.241	N/A	N/A	32.787	AV
4			2483.500	52.058	19.147	-1.942	54.000	32.911	AV
5			2484.990	53.096	20.179	-0.904	54.000	32.917	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/03 - 00:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11ax-HE40 at channel 2447MHz Ant 0 + 1	

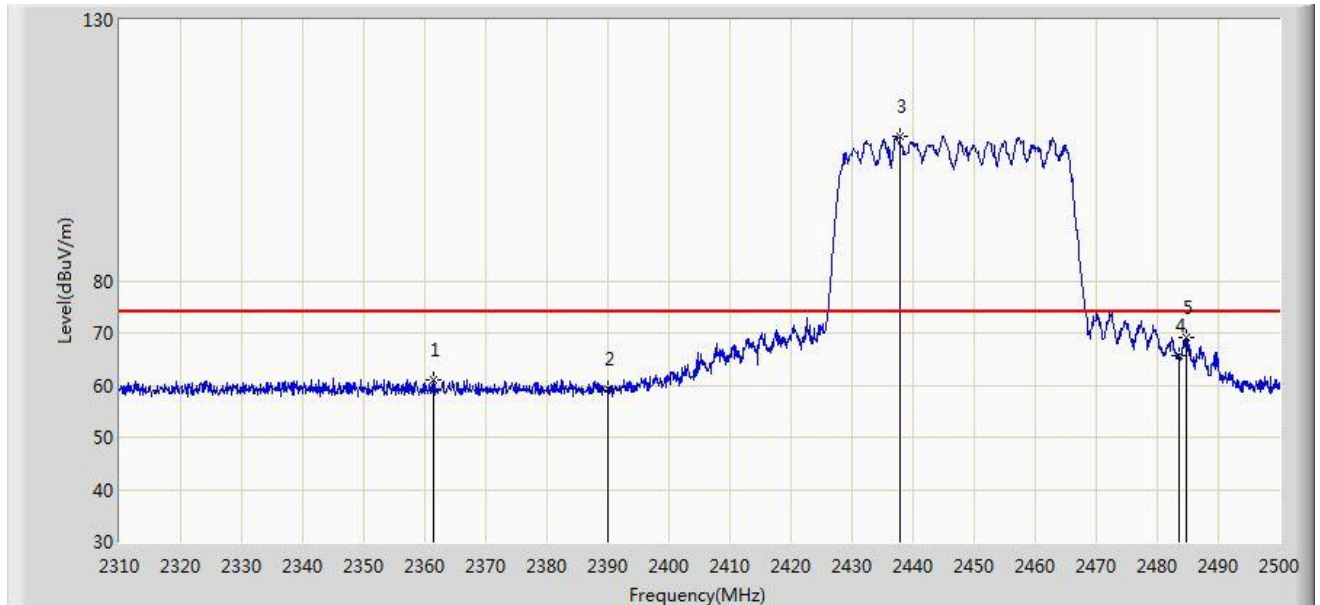


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2361.395	61.116	28.718	-12.884	74.000	32.398	PK
2			2390.000	59.211	26.693	-14.789	74.000	32.518	PK
3		*	2437.870	107.810	75.091	N/A	N/A	32.720	PK
4			2483.500	65.786	32.875	-8.214	74.000	32.911	PK
5			2484.800	69.031	36.115	-4.969	74.000	32.916	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/07/03 - 00:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHzg	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Test Mode : Transmit by 802.11ax-HE40 at channel 2447MHz Ant 0 + 1	

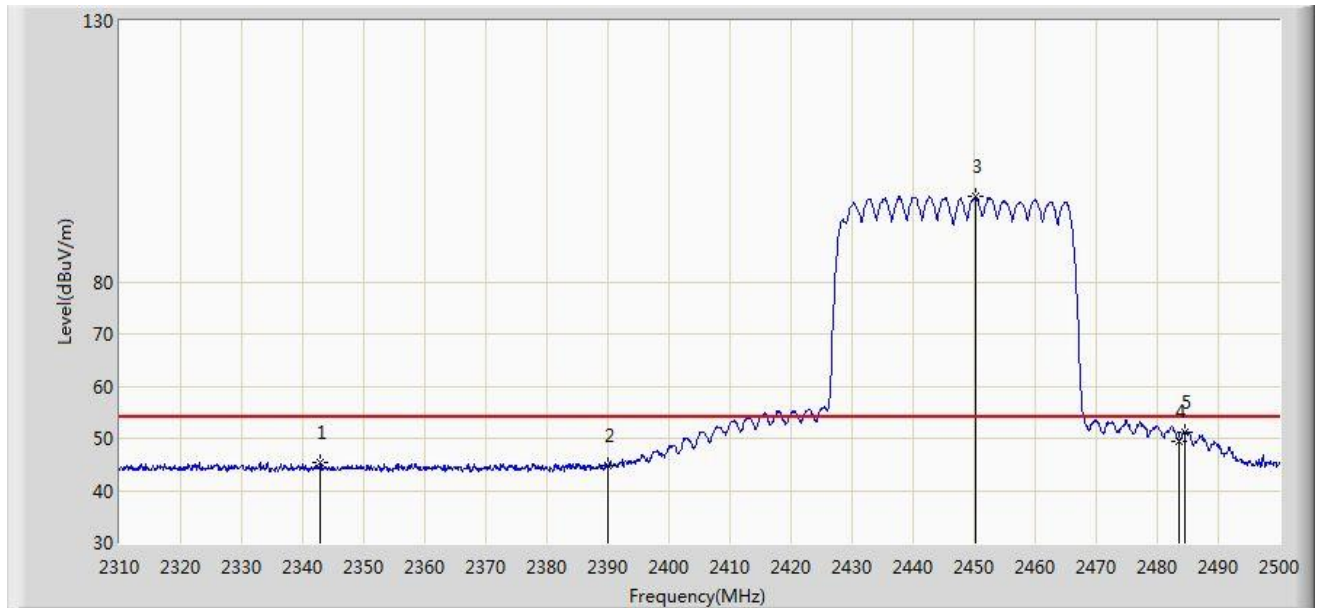


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2342.965	45.439	40.547	-8.561	54.000	4.892	AV
2			2390.000	44.730	39.782	-9.270	54.000	4.948	AV
3		*	2450.220	96.512	91.491	N/A	N/A	5.021	AV
4			2483.500	49.565	44.505	-4.435	54.000	5.060	AV
5			2484.420	51.301	46.240	-2.699	54.000	5.061	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 22:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE40 at channel 2452MHz Ant 0 + 1	

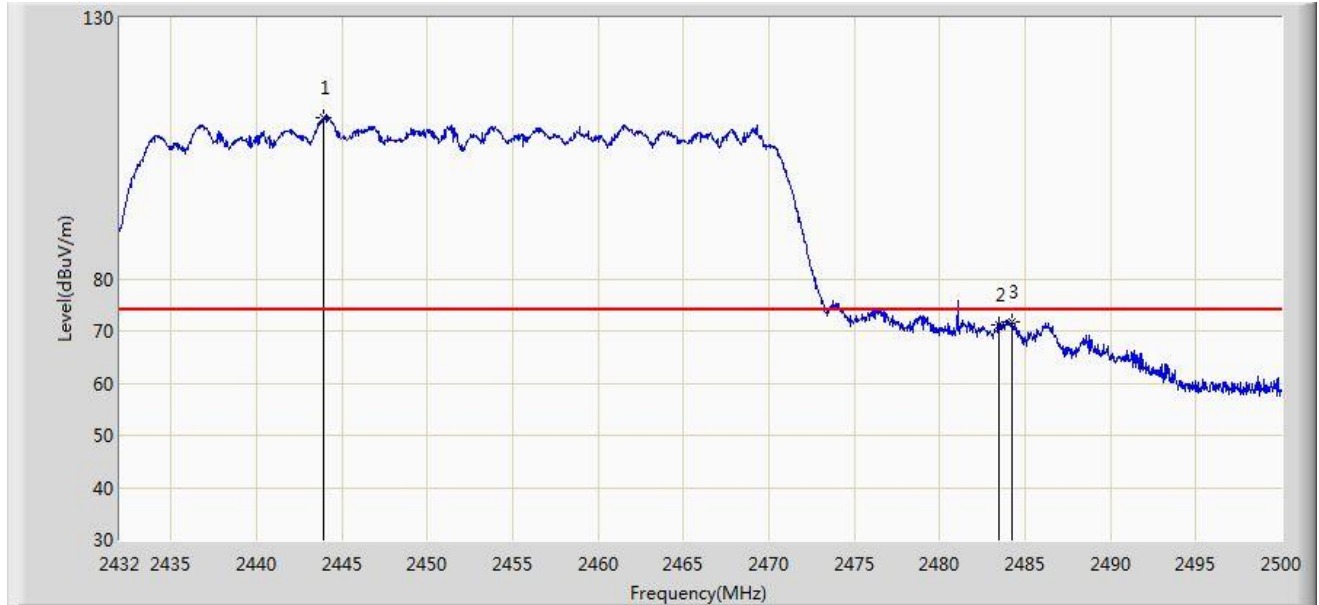


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2443.968	111.009	78.264	N/A	N/A	32.745	PK
2			2483.500	71.031	38.120	-2.969	74.000	32.911	PK
3			2484.224	71.878	38.964	-2.122	74.000	32.914	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 22:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE40 at channel 2452MHz Ant 0 + 1	

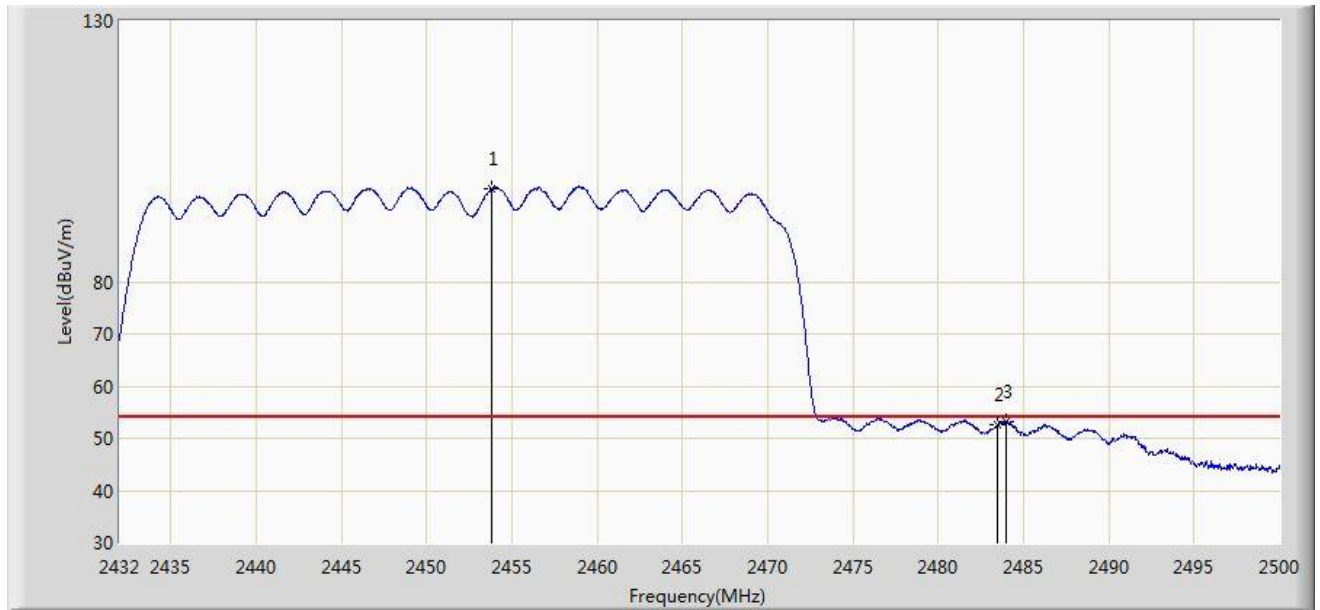


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2453.828	97.882	65.096	N/A	N/A	32.786	AV
2			2483.500	52.695	19.784	-1.305	54.000	32.911	AV
3			2483.986	53.197	20.284	-0.803	54.000	32.913	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 22:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE40 at channel 2452MHz Ant 0 + 1	

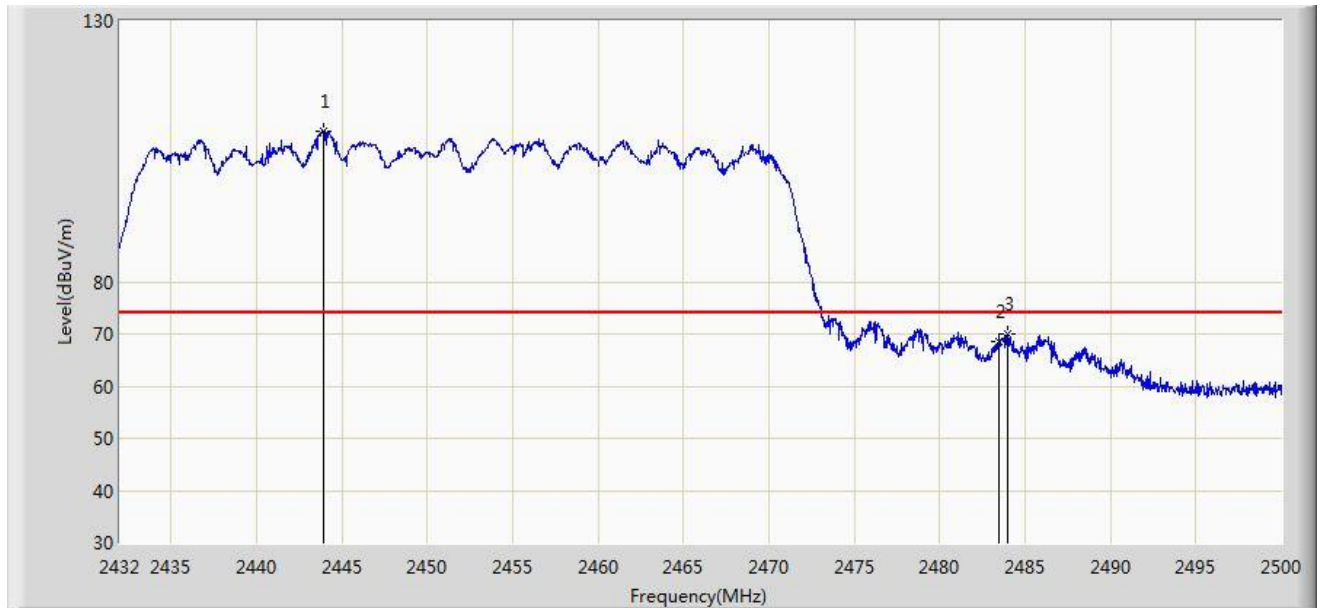


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2443.900	108.932	76.187	N/A	N/A	32.745	PK
2			2483.500	68.612	35.701	-5.388	74.000	32.911	PK
3			2483.986	69.921	37.008	-4.079	74.000	32.913	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/06/26 - 22:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Note: Transmit by 802.11ax-HE40 at channel 2452MHz Ant 0 + 1	

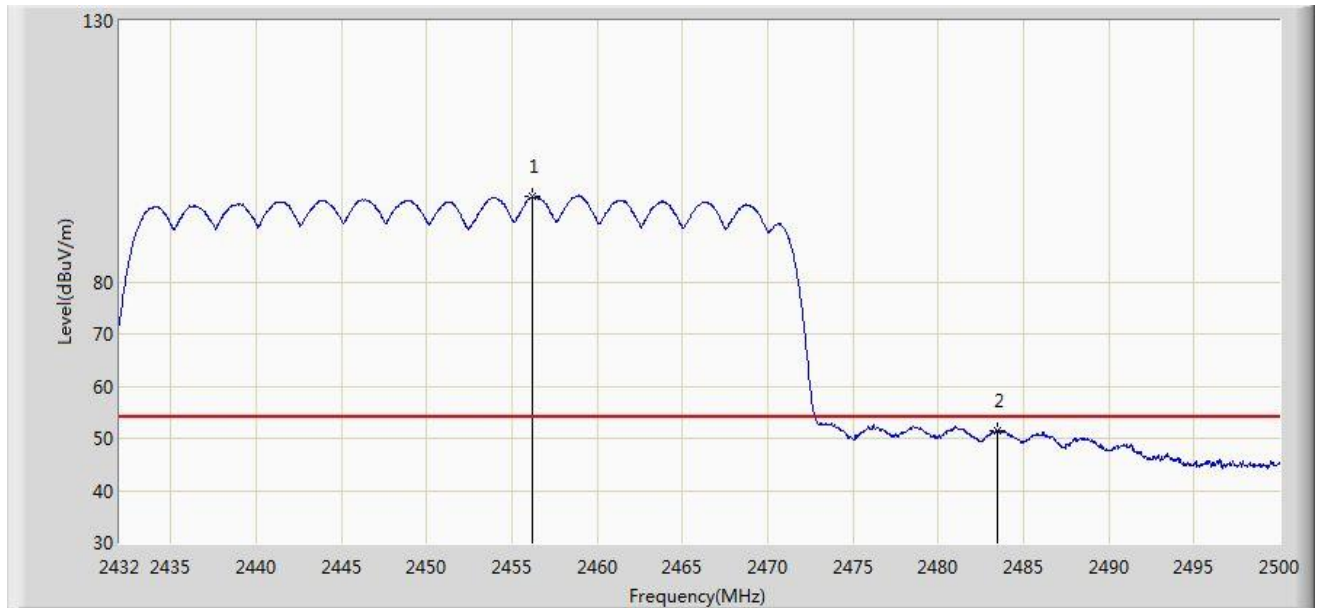

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.242	96.306	63.510	N/A	N/A	32.797	AV
2			2483.500	51.415	18.504	-2.585	54.000	32.911	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.8.2. Test Setup

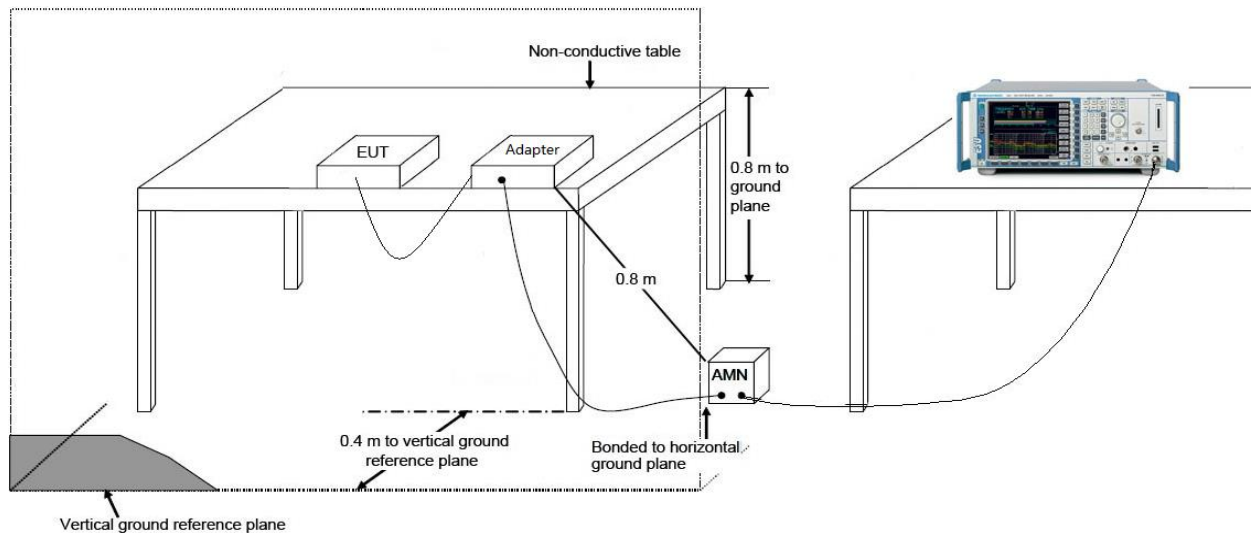

7.8.3. Test Result

For APIN0504

Site: SR2	Time: 2019/07/10 - 11:55
Limit: FCC_Part15.207_CE	Engineer: Kevin Ker
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode 1	

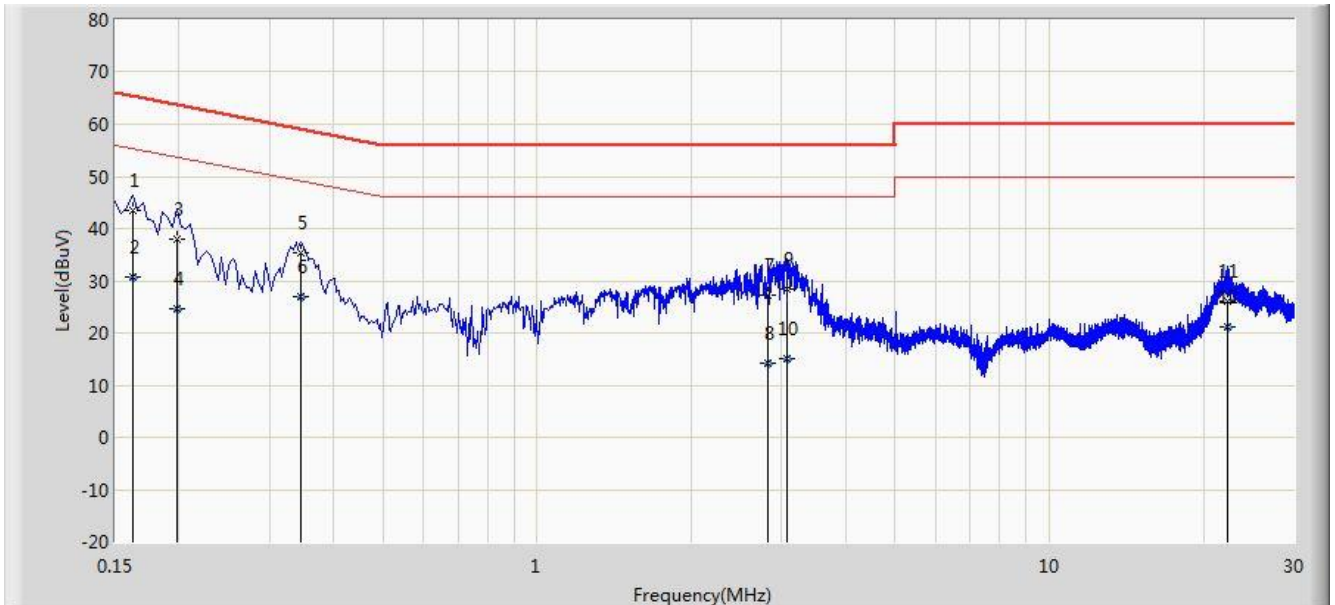


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.162	43.601	33.504	-21.760	65.361	10.097	QP
2			0.162	30.790	20.693	-24.571	55.361	10.097	AV
3			0.198	38.093	28.088	-25.601	63.694	10.005	QP
4			0.198	24.700	14.695	-28.994	53.694	10.005	AV
5			0.346	35.400	25.359	-23.658	59.058	10.041	QP
6			0.346	26.836	16.794	-22.222	49.058	10.041	AV
7			2.822	27.288	17.442	-28.712	56.000	9.846	QP
8			2.822	14.160	4.313	-31.840	46.000	9.846	AV
9			3.078	28.285	18.425	-27.715	56.000	9.861	QP
10			3.078	15.054	5.193	-30.946	46.000	9.861	AV
11			22.318	26.206	16.051	-33.794	60.000	10.155	QP
12			22.318	21.027	10.872	-28.973	50.000	10.155	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2019/07/10 - 11:59
Limit: FCC_Part15.207_CE	Engineer: Kevin Ker
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode 1	

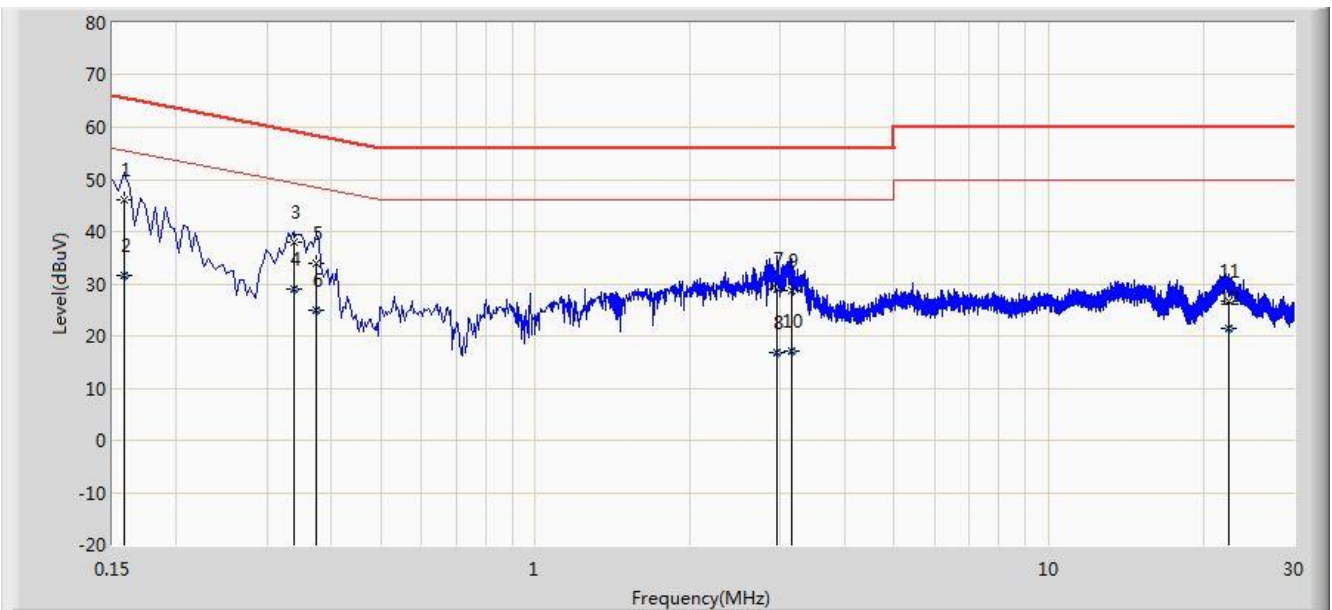


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.158	46.105	35.816	-19.463	65.568	10.290	QP
2			0.158	31.578	21.288	-23.990	55.568	10.290	AV
3			0.338	37.912	27.846	-21.341	59.252	10.066	QP
4			0.338	29.062	18.996	-20.190	49.252	10.066	AV
5			0.374	33.849	23.756	-24.563	58.412	10.093	QP
6			0.374	24.952	14.859	-23.459	48.412	10.093	AV
7			2.958	28.873	19.010	-27.127	56.000	9.863	QP
8			2.958	16.806	6.944	-29.194	46.000	9.863	AV
9			3.162	28.607	18.744	-27.393	56.000	9.863	QP
10			3.162	17.139	7.276	-28.861	46.000	9.863	AV
11			22.398	26.652	16.435	-33.348	60.000	10.218	QP
12			22.398	21.496	11.279	-28.504	50.000	10.218	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

For APIN0505

Site: SR2	Time: 2019/07/10 - 13:17
Limit: FCC_Part15.207_CE	Engineer: Kevin Ker
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode 1	

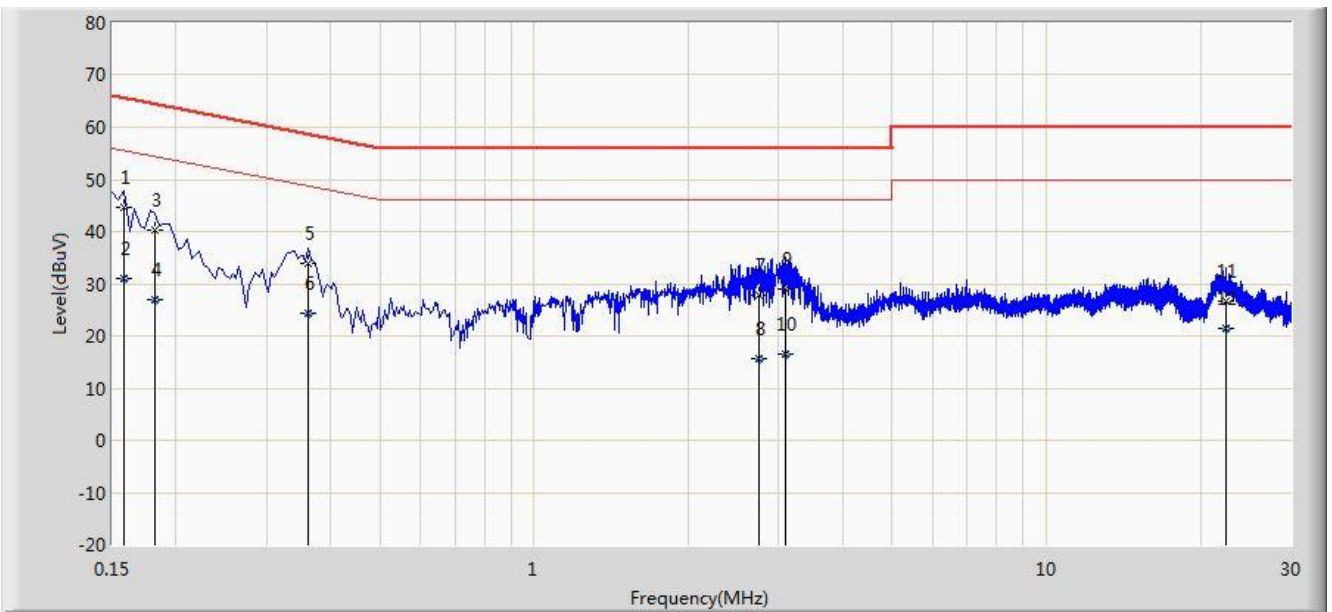


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.158	44.642	34.331	-20.927	65.568	10.311	QP
2			0.158	31.081	20.770	-24.487	55.568	10.311	AV
3			0.182	40.270	30.222	-24.124	64.394	10.048	QP
4			0.182	27.029	16.981	-27.365	54.394	10.048	AV
5			0.362	33.833	23.779	-24.849	58.682	10.055	QP
6			0.362	24.487	14.432	-24.196	48.682	10.055	AV
7			2.746	27.710	17.861	-28.290	56.000	9.849	QP
8			2.746	15.795	5.946	-30.205	46.000	9.849	AV
9			3.086	28.986	19.126	-27.014	56.000	9.859	QP
10			3.086	16.559	6.700	-29.441	46.000	9.859	AV
11			22.418	26.593	16.432	-33.407	60.000	10.162	QP
12			22.418	21.309	11.147	-28.691	50.000	10.162	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2019/07/10 - 13:22
Limit: FCC_Part15.207_CE	Engineer: Kevin Ker
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode 1	

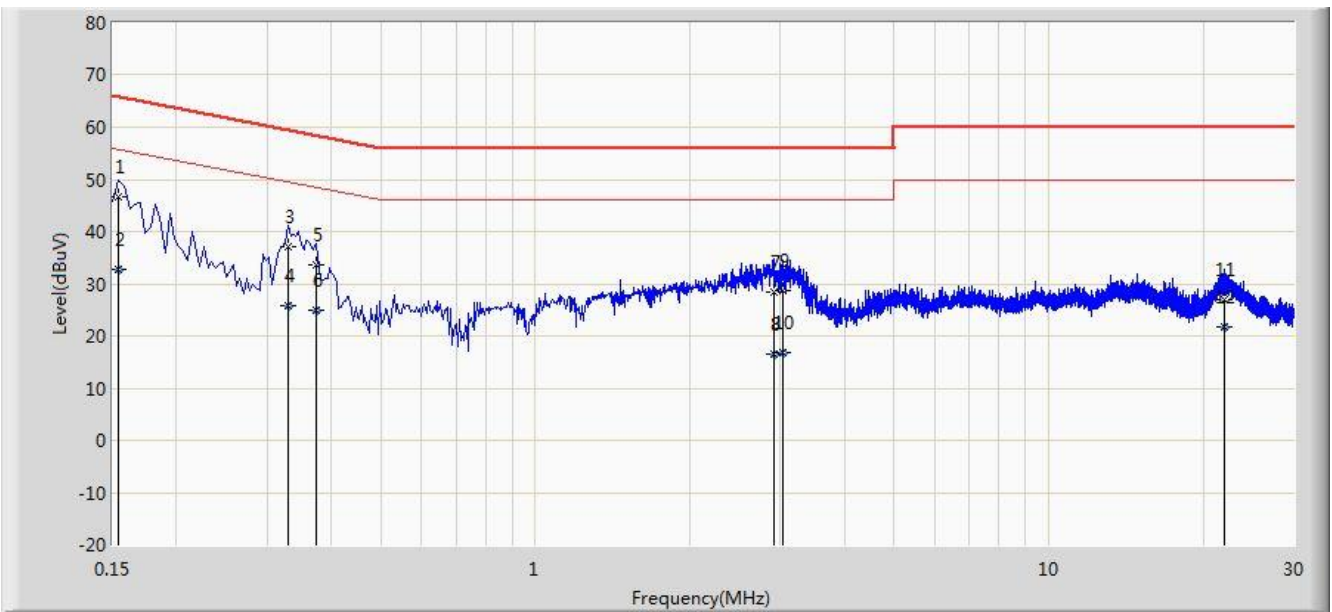

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.154	46.687	35.971	-19.094	65.781	10.716	QP
2			0.154	32.788	22.072	-22.993	55.781	10.716	AV
3			0.330	37.218	27.158	-22.233	59.451	10.060	QP
4			0.330	25.902	15.842	-23.549	49.451	10.060	AV
5			0.374	33.479	23.386	-24.932	58.412	10.093	QP
6			0.374	24.968	14.875	-23.443	48.412	10.093	AV
7			2.906	28.364	18.509	-27.636	56.000	9.855	QP
8			2.906	16.628	6.772	-29.372	46.000	9.855	AV
9			3.038	28.788	18.921	-27.212	56.000	9.867	QP
10			3.038	16.910	7.043	-29.090	46.000	9.867	AV
11			21.970	26.817	16.593	-33.183	60.000	10.224	QP
12			21.970	21.608	11.384	-28.392	50.000	10.224	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the unit is in compliance with Part 15C of the FCC Rules.

————— The End —————

Appendix A - Test Setup Photograph

Refer to "1906TW0102-UT" file.

Appendix B - EUT Photograph

Refer to "1906TW0102-UE" file.