

# MEASUREMENT REPORT

## FCC PART 15 Subpart C WLAN 802.11b/g/n/ax

---



**FCC ID:** Q9DAPIN0518

**APPLICANT:** Hewlett Packard Enterprise Company

**Application Type:** Certification

**Product:** ACCESS POINT

**Model No.:** APIN0518


**Brand Name:**  


**FCC Classification:** Digital Transmission System (DTS)

**FCC Rule Part(s):** Part15 Subpart C (Section 15.247)

**Test Procedure(s):** ANSI C63.10-2013, KDB 662911 D01v02r01

**Test Date:** December 25, 2019 ~ May 18, 2020

Reviewed By:   
\_\_\_\_\_  
( Paddy Chen )

Approved By:   
\_\_\_\_\_  
(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

---

## Revision History

Report No.	Version	Description	Issue Date	Note
2003TW0003-U3	Rev. 01	Initial report	05-23-2020	Valid

---

## CONTENTS

Description	Page
<b>General Information.....</b>	<b>5</b>
<b>1. INTRODUCTION.....</b>	<b>6</b>
1.1. Scope.....	6
1.2. MRT Test Location.....	6
<b>2. PRODUCT INFORMATION.....</b>	<b>7</b>
2.1. Feature of Equipment under Test.....	7
2.2. Product Specification Subjective to this Report.....	7
2.3. Working Frequencies for this report.....	8
2.4. Test Mode.....	8
2.5. Description of Available Antennas.....	9
2.6. Description of Antenna RF Port.....	11
2.7. Duty Cycle.....	11
2.8. Description of Test Software.....	13
2.9. EMI Suppression Device(s)/Modifications.....	13
2.10. Labeling Requirements.....	13
<b>3. DESCRIPTION of TEST.....</b>	<b>14</b>
3.1. Measurement Procedure.....	14
3.2. AC Line Conducted Emissions.....	14
3.3. Radiated Emissions.....	15
<b>4. ANTENNA REQUIREMENTS.....</b>	<b>16</b>
<b>5. TEST EQUIPMENT CALIBRATION DATE.....</b>	<b>17</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>18</b>
<b>7. TEST RESULT.....</b>	<b>19</b>
7.1. Summary.....	19
7.2. 6dB Bandwidth Measurement.....	20
7.2.1. Test Limit.....	20
7.2.2. Test Procedure used.....	20
7.2.3. Test Setting.....	20
7.2.4. Test Setup.....	20
7.2.5. Test Result.....	21
7.3. Output Power Measurement.....	28
7.3.1. Test Limit.....	28
7.3.2. Test Procedure Used.....	28

7.3.3.	Test Setting.....	28
7.3.4.	Test Setup .....	28
7.3.5.	Test Result of Output Power .....	29
7.4.	Power Spectral Density Measurement.....	32
7.4.1.	Test Limit .....	32
7.4.2.	Test Procedure Used .....	32
7.4.3.	Test Setting.....	32
7.4.4.	Test Setup .....	33
7.4.5.	Test Result.....	34
7.5.	Conducted Band Edge and Out-of-Band Emissions .....	47
7.5.1.	Test Limit .....	47
7.5.2.	Test Procedure Used .....	47
7.5.3.	Test Setting.....	47
7.5.4.	Test Setup .....	48
7.5.5.	Test Result.....	49
7.6.	Radiated Spurious Emission Measurement .....	62
7.6.1.	Test Limit .....	62
7.6.2.	Test Procedure Used .....	62
7.6.3.	Test Setting.....	62
7.6.4.	Test Setup .....	64
7.6.5.	Test Result.....	65
7.7.	Radiated Restricted Band Edge Measurement.....	105
7.7.1.	Test Limit .....	105
7.7.2.	Test Procedure Used .....	106
7.7.3.	Test Setting.....	106
7.7.4.	Test Setup .....	107
7.7.5.	Test Result.....	108
7.8.	AC Conducted Emissions Measurement .....	248
7.8.1.	Test Limit .....	248
7.8.2.	Test Setup .....	248
7.8.3.	Test Result.....	249
<b>8.</b>	<b>CONCLUSION .....</b>	<b>251</b>
	<b>Appendix A - Test Setup Photograph .....</b>	<b>252</b>
	<b>Appendix B - EUT Photograph.....</b>	<b>253</b>

## General Information

<b>Applicant:</b>	Hewlett Packard Enterprise Company
<b>Applicant Address:</b>	3333 Scott Blvd, Santa Clara, CA 95054, USA
<b>Manufacturer:</b>	Hewlett Packard Enterprise Company
<b>Manufacturer Address:</b>	3333 Scott Blvd, Santa Clara, CA 95054, USA
<b>Test Site:</b>	MRT Technology (Taiwan) Co., Ltd
<b>Test Site Address:</b>	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
<b>Test Device Serial No.:</b>	Radiated sample S/N: DE201600CC, Conducted sample S/N: DE29A00006

## Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Fuxing Rd., Taoyuan, Taiwan ( R.O.C )

- MRT facility is a FCC registered (Reg. No. 291082 and 153292) test facility with the site description report on file and is designated by the FCC as an Accredited Test Film.
- MRT facility is an IC registered (MRT Reg. No. 21723-1) test laboratory with the site description on file at Industry Canada.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (TAF) under the American Association for Laboratory Accreditation Program (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC, Industry Taiwan, EU and TELEC Rules.


## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

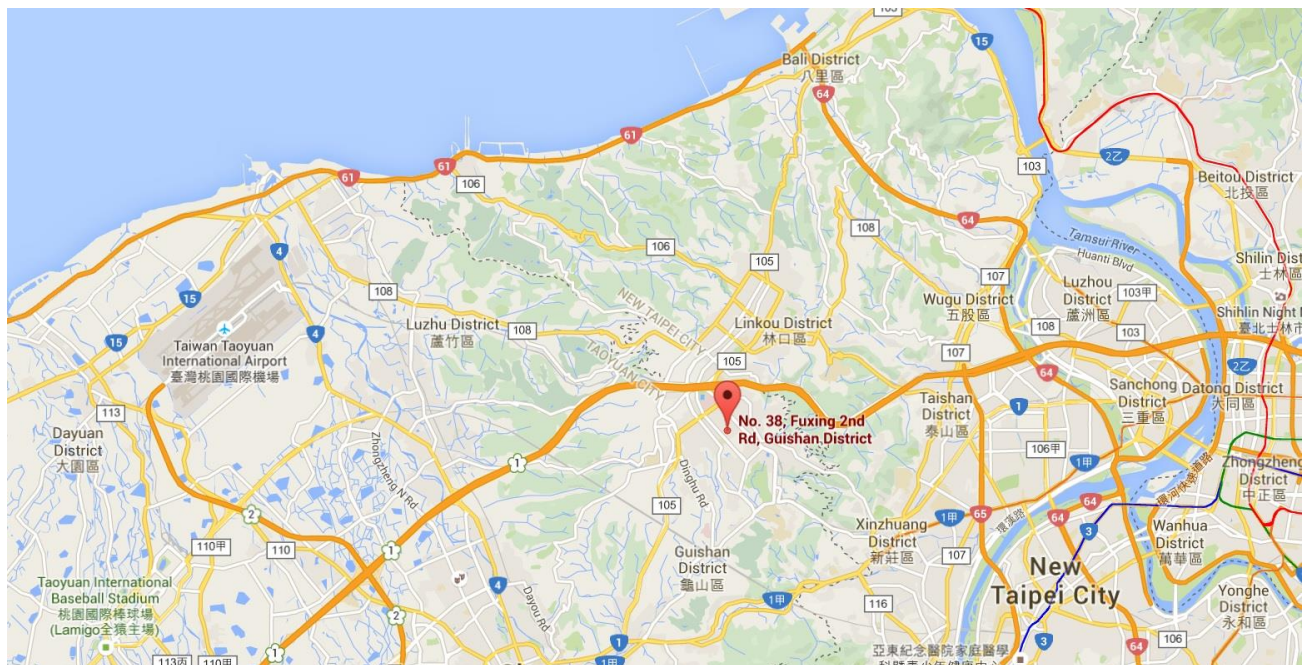

## 2. PRODUCT INFORMATION

### 2.1. Feature of Equipment under Test

Product Name:	ACCESS POINT
Model No.:	APIN0518
Wi-Fi Specification:	802.11a/b/g/n/ac/ax
Bluetooth Specification:	v5.0 single mode
Zigbee Specification:	802.15.4
Software Version:	F.1.01
Operating Temperature:	-40 ~ 65 °C
Power Type:	PoE input
Operating Environment:	Indoor Use

### 2.2. Product Specification Subjective to this Report

Frequency Range:	802.11b/g/n-HT20/ax-HE20: 2412 ~ 2462MHz 802.11n-HT40/ax-HE40: 2422 ~ 2452MHz
Channel Number:	802.11b/g/n-HT20/ax-HE20: 11 802.11n-HT40/ax-HE40: 7
Type of Modulation:	802.11b: DSSS 802.11g/n: OFDM 802.11ax: OFDMA
Data Rate:	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ax: up to 574Mbps

Note 1: For other features of this EUT, test report will be issued separately.

Note 2: The 802.11ax mode does not support partial RU configurations.

### 2.3. Working Frequencies for this report

802.11b/g/n-HT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n-HT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

### 2.4. Test Mode

Test Mode	Mode 1: Transmit by 802.11b (1Mbps)
	Mode 2: Transmit by 802.11g (6Mbps)
	Mode 3: Transmit by 802.11n-HT20 (MCS0)
	Mode 4: Transmit by 802.11n-HT40 (MCS0)
	Mode 5: Transmit by 802.11ax-HE20 (MCS0)
	Mode 6: Transmit by 802.11ax-HE40 (MCS0)



## 2.5. Description of Available Antennas

Antenna No.	Antenna Type	Frequency Band (GHz)	Model No.	Max Peak Gain (dBi)	BF Dir Gain (dBi)	CDD Dir Gain (dBi)	
						For Power	For PSD
Wi-Fi External Antenna List (2.4GHz 2*2 MIMO, 5GHz 4*4 MIMO)							
1	Omni	2.4	AP-ANT-40	4.0	7.01	4.0	7.01
		5		5.0		11.02	5.0
2	Omni	2.4	AP-ANT-19	3.0	6.01	3.0	6.01
		5		6.0		12.02	6.0
3	Omni	2.4	AP-ANT-1W	3.8	6.81	3.8	6.81
		5		5.8		11.82	5.8
4	Omni	2.4	AP-ANT-13B	2.3	5.31	2.3	5.31
		5		4.0		10.02	4.0
5	Omni	2.4	AP-ANT-20W	2.0	5.01	2.0	5.01
		5		2.0		8.02	2.0
6	Omni	2.4	AP-ANT-22	2.0	5.01	2.0	5.01
		5		4.0		10.02	4.0
7	Omni	2.4	AP-ANT-16	3.9	6.91	3.9	6.91
		5		4.7		10.72	4.7
8 (Note 3)	Directional	2.4	AP-ANT-45	4.5	4.5	4.5	4.5
		5		5.5		8.51	5.5
9 (Note 3)	Directional	2.4	AP-ANT-48	8.5	8.5	8.5	8.5
		5		8.5		11.51	8.5
10 (Note 3)	Directional	2.4	ANT-2x2-2314	14.0	14.0	14.0	14.0
11 (Note 3)	Directional	5	ANT-4x4-5314	14.0	17.01	14.0	17.01
12 (Note 3)	Directional	5	ANT-3x3-5712	11.5	14.51	11.5	14.51
13 (Note 3)	Directional	2.4	AP-ANT-25	5.0	5.0	5.0	5.0
		5		5.0		8.01	5.0
14 (Note 3)	Directional	2.4	AP-ANT-28	7.5	7.5	7.5	7.5
		5		7.5		10.51	7.5
Bluetooth / ZigBee Internal Antenna							
PCB		2.4		4.2			

Note:

1. The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

For CDD transmissions, directional gain is calculated as follows,  $N_{ANT} = 2$ ,  $N_{SS} = 1$ .

If all antennas have the same gain,  $G_{ANT}$ , Directional gain =  $G_{ANT} + \text{Array Gain}$ , where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,

$$\text{Array Gain} = 10 \log (N_{ANT}/ N_{SS}) \text{ dB} = 3.01;$$

- For power measurements on IEEE 802.11 devices,

$$\text{Array Gain} = 0 \text{ dB for } N_{ANT} \leq 4;$$

2. The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac/ax, not include 802.11a/b/g. Directional gain =  $G_{ANT} + \text{BF Gain}$ , BF Gain was declared by the applicant.

3. These antennas have Cross-Polarized design, only each two outputs driving a pair of antennas that are cross-polarized, the detail see the antenna specification.

4. Low gain antenna (AP-ANT-20W) was selected to perform all RF testing that can get maximum power setting, high gain directional antenna (ANT-2x2-2314 & ANT-4x4-5314) were selected to perform radiated spurious emission and band edge testing. High gain antenna power setting will be reduced according to difference value of antenna gain declared by applicant.

## 2.6. Description of Antenna RF Port

Antenna RF Port						
--	2.4GHz RF Port		5GHz RF Port			
Software Control Port	Ant 0	Ant 1	Ant 0	Ant 1	Ant 2	Ant 3


## 2.7. Duty Cycle

2.4GHz WLAN (DTS) operation is possible in 20MHz, and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than  $50/T$ , where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:


Test Mode	Duty Cycle	Test Mode	Duty Cycle
802.11b	95.07%	802.11n-HT40	96.40%
802.11g	94.81%	802.11ax-HE20	97.51%
802.11n-HT20	97.96%	802.11ax-HE40	95.66%

## Duty Cycle (T = Transmission Duration)


802.11b (T = 12.35ms)

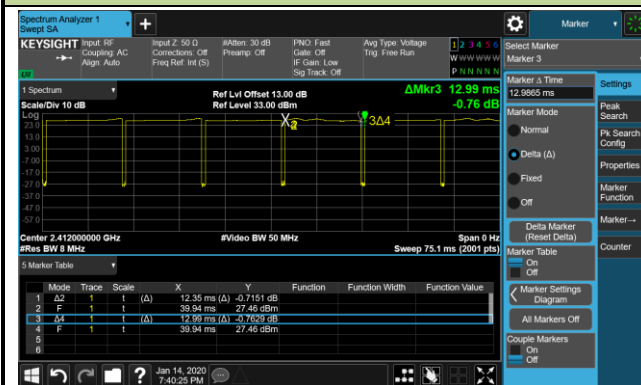


802.11g (T = 2.064ms)

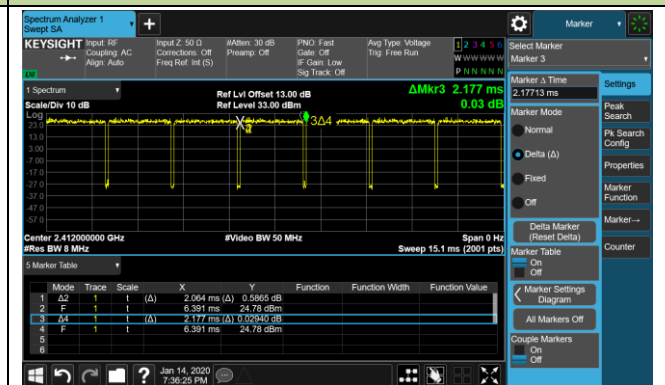


802.11n-HT20 (T = 1.920ms)

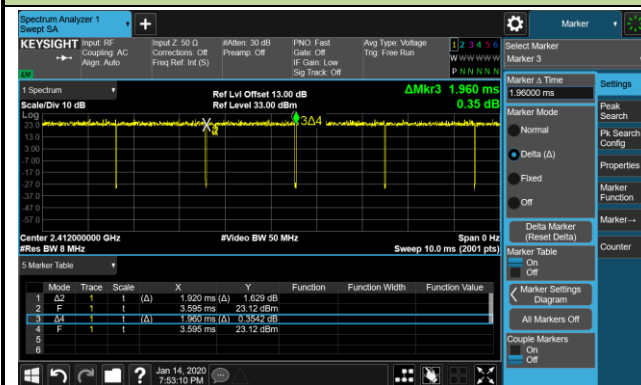


802.11n-HT40 (T = 947.5us)

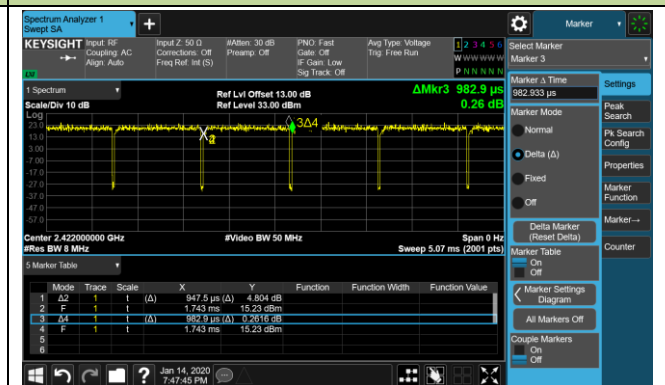

802.11ax-HE20 (T = 1.486ms)

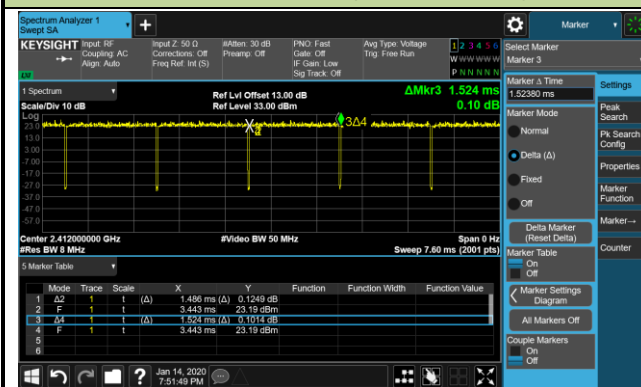

802.11ax-HE40 (T = 780.3us)

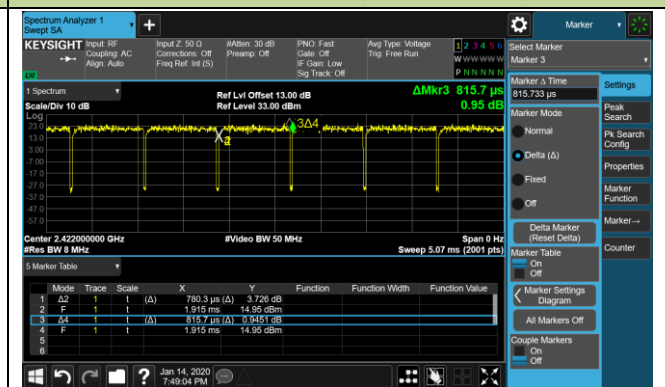

## **2.8. Description of Test Software**

The test utility software used during testing was “accessMTool”, and the version was “v3.1.0.5”. Detail power setting refer to operation description

## **2.9. EMI Suppression Device(s)/Modifications**

No EMI suppression device(s) were added and/or no modifications were made during testing.

## **2.10. Labeling Requirements**

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

### **3. DESCRIPTION of TEST**

#### **3.1. Measurement Procedure**

The measurement procedure described in the document titled “American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices” (ANSI C63.10-2013) was used in the measurement.

#### **3.2. AC Line Conducted Emissions**

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

## 4. ANTENNA REQUIREMENTS

### **Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

### **Conclusion:**

The product is defined as the professional installation of equipment by the manufacturer, there is no necessary to comply with the requirement of §15.203.



## 5. TEST EQUIPMENT CALIBRATION DATE

### Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV 216	MRTTWA00019	1 year	2021/3/26
Two-Line V-Network	R&S	ENV 216	MRTTWA00020	1 year	2021/4/24
8-Wire ISN (T8)	R&S	ENY81	MRTTWA00018	1 year	2020/5/23
EMI Test Receiver	R&S	ESR3	MRTTWA00045	1 year	2020/5/29
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2020/5/30

### Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2021/4/27
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2020/6/4
Broadband Horn antenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2021/4/24
Breitband Horn antenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2021/4/24
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2021/4/24
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2021/4/24
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2021/3/24
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2021/3/25
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2020/10/2
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2021/6/16
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2020/5/30

### Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2021/4/24
Wideband Radio Communication Taster	R&S	CMW 500	MRTTWA00041	1 year	2021/1/7
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2020/10/2
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2020/7/11
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2021/3/24
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2020/5/30

Software	Version	Function
e3	9.160520a	EMI Test Software

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>AC Conducted Emission Measurement</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 150kHz~30MHz: 2.53dB
<b>Radiated Emission Measurement</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 9kHz ~ 1GHz: 4.25dB 1GHz ~ 40GHz: 4.45dB

## 7. TEST RESULT

### 7.1. Summary

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	$\leq 30\text{dBm}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$		Pass	Section 7.4
15.247(d)	Band Edge / Out-of-Band Emissions	$\geq 30\text{dBc (Average)}$		Pass	Section 7.5
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6 & 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

#### Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 3) Test Items "6dB Bandwidth" & "Band Edge / Out-of-Band Emissions" have been assessed MIMO transmission, and showed the worst test data in this report.

## 7.2. 6dB Bandwidth Measurement

### 7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


### 7.2.2. Test Procedure used

ANSI C63.10-2013 Section 11.8

### 7.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3.  $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize




### 7.2.4. Test Setup

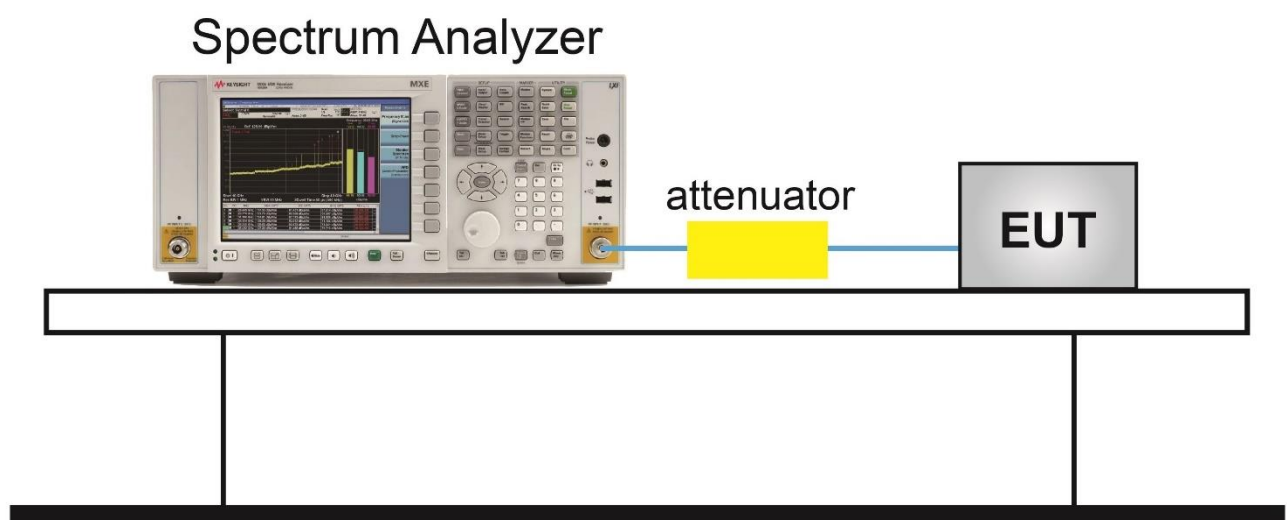

### 7.2.5. Test Result


Product	ACCESS POINT	Temperature	27°C
Test Engineer	Kevin Ker	Relative Humidity	65%
Test Site	SR2	Test Date	2020/01/14
Test Item	6dB Bandwidth		

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
<b>Ant 0 / Ant 0 + 1</b>						
802.11b	1Mbps	01	2412	7.09	≥ 0.5	Pass
802.11b	1Mbps	06	2437	7.09	≥ 0.5	Pass
802.11b	1Mbps	11	2462	7.08	≥ 0.5	Pass
802.11g	6Mbps	01	2412	16.36	≥ 0.5	Pass
802.11g	6Mbps	06	2437	16.35	≥ 0.5	Pass
802.11g	6Mbps	11	2462	16.38	≥ 0.5	Pass
802.11n-HT20	MCS0	01	2412	17.59	≥ 0.5	Pass
802.11n-HT20	MCS0	06	2437	17.57	≥ 0.5	Pass
802.11n-HT20	MCS0	11	2462	17.57	≥ 0.5	Pass
802.11n-HT40	MCS0	03	2422	36.33	≥ 0.5	Pass
802.11n-HT40	MCS0	06	2437	36.09	≥ 0.5	Pass
802.11n-HT40	MCS0	09	2452	35.97	≥ 0.5	Pass
802.11ax-HE20	MCS0	01	2412	18.91	≥ 0.5	Pass
802.11ax-HE20	MCS0	06	2437	18.88	≥ 0.5	Pass
802.11ax-HE20	MCS0	11	2462	19.02	≥ 0.5	Pass
802.11ax-HE40	MCS0	03	2422	37.64	≥ 0.5	Pass
802.11ax-HE40	MCS0	06	2437	37.41	≥ 0.5	Pass
802.11ax-HE40	MCS0	09	2452	37.05	≥ 0.5	Pass

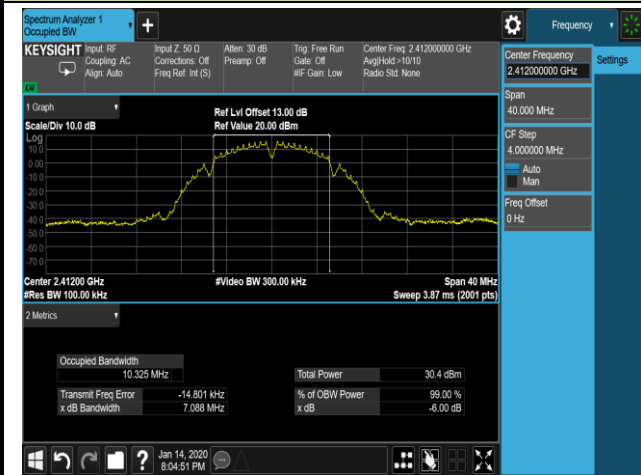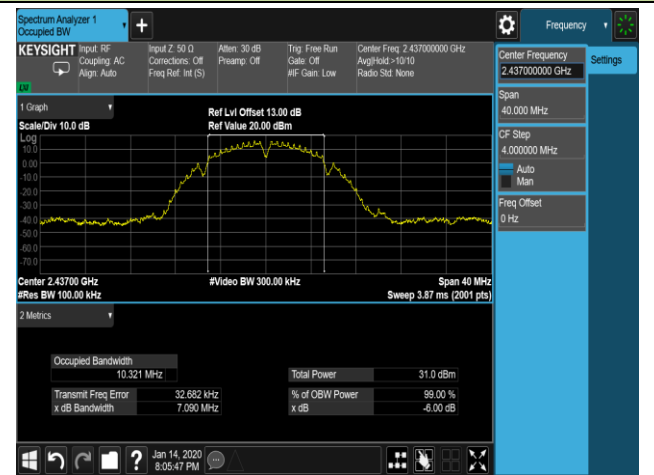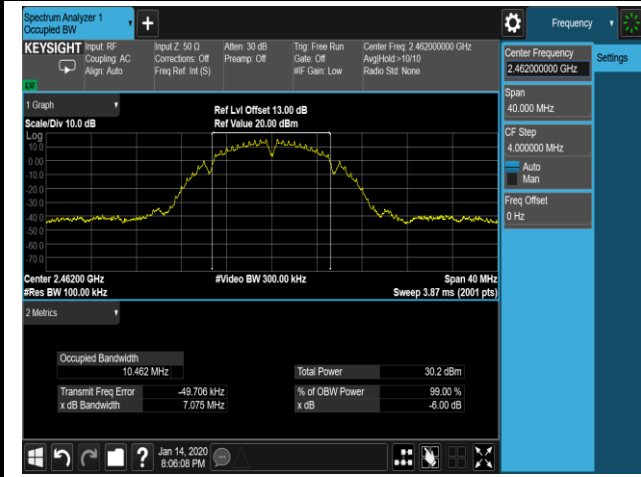
**802.11b 6dB Bandwidth - Ant 0 / Ant 0 + 1**
**Channel 01 (2412MHz)**

**Channel 06 (2437MHz)**

**Channel 11 (2462MHz)**

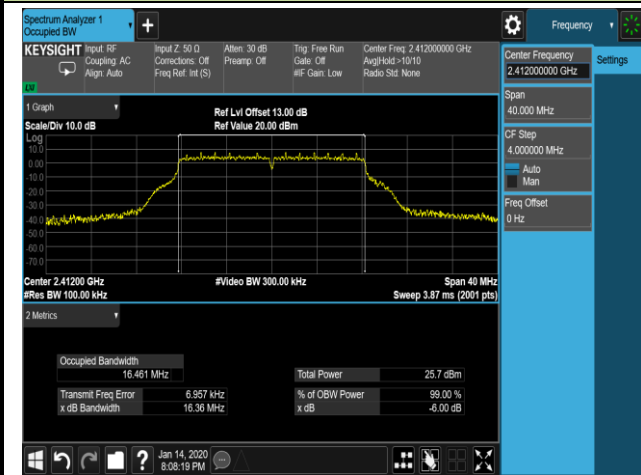
802.11g 6dB Bandwidth - Ant 0 / Ant 0 + 1


Channel 01 (2412MHz)

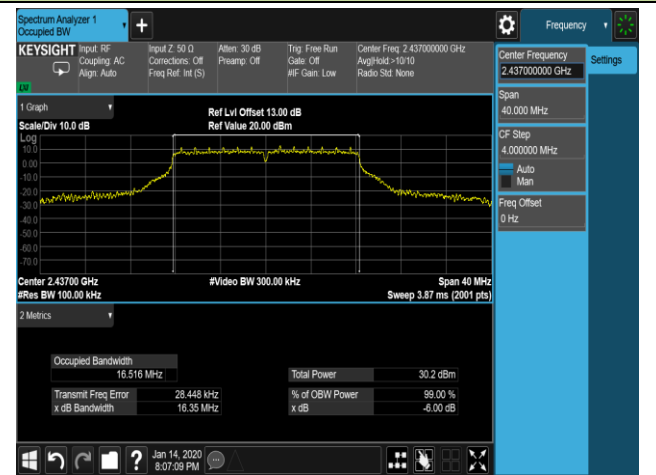

Channel 06 (2437MHz)




Channel 11 (2462MHz)

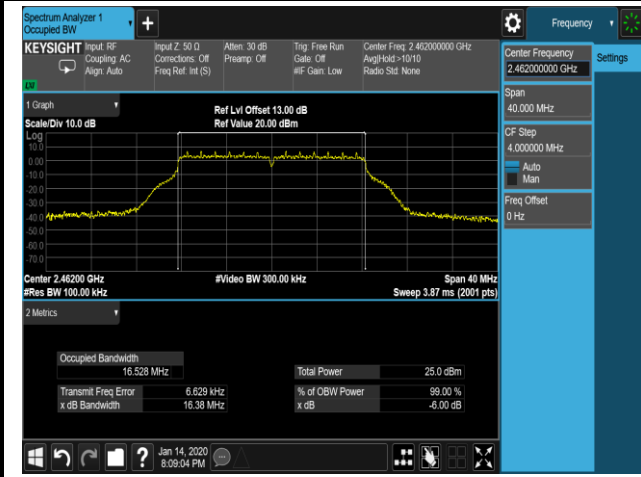


802.11n-HT20 6dB Bandwidth - Ant 0 / Ant 0 + 1


Channel 01 (2412MHz)

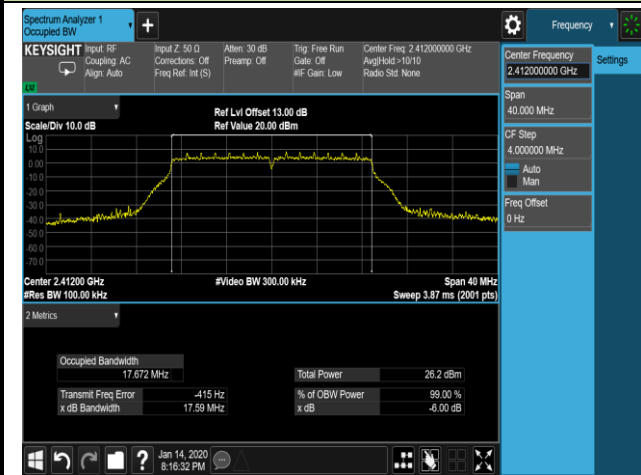

Channel 06 (2437MHz)

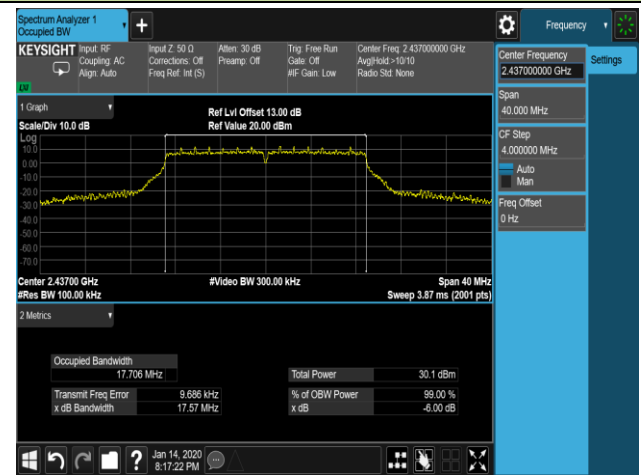


Channel 11 (2462MHz)

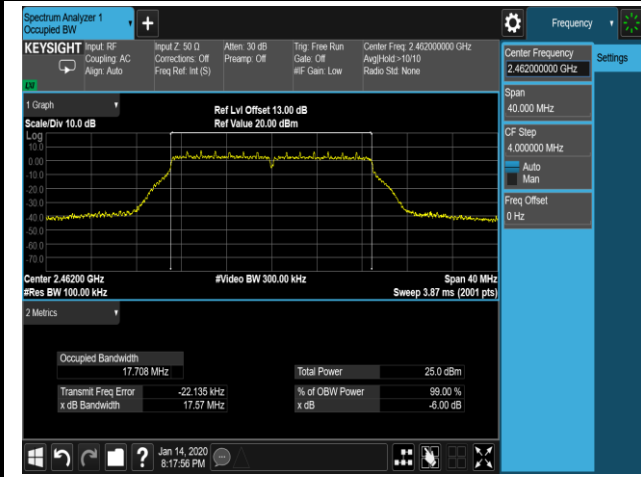




802.11n-HT40 6dB Bandwidth - Ant 0 / Ant 0 + 1


Channel 03 (2422MHz)

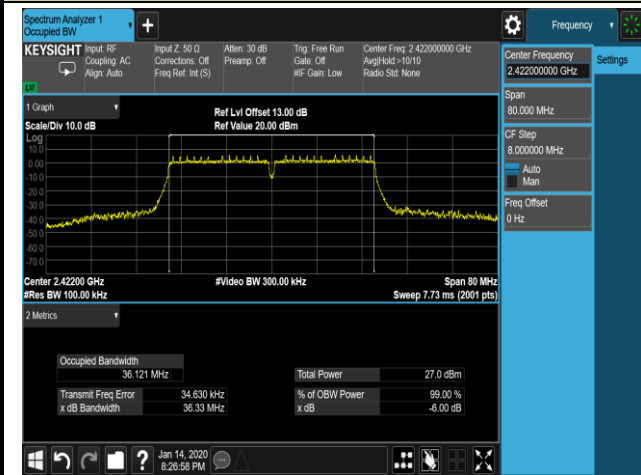

Channel 06 (2437MHz)

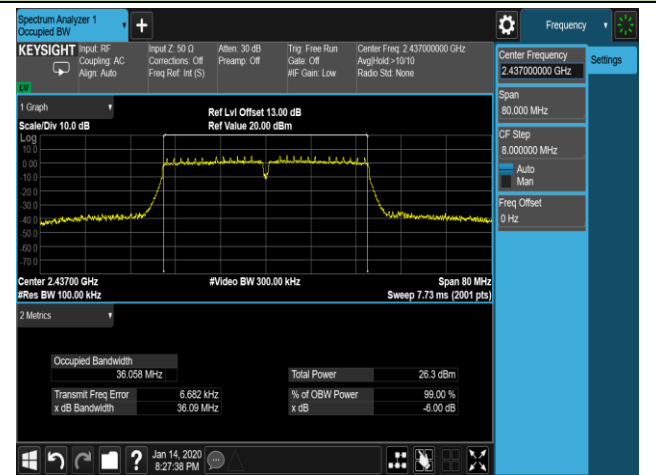


Channel 09 (2452MHz)

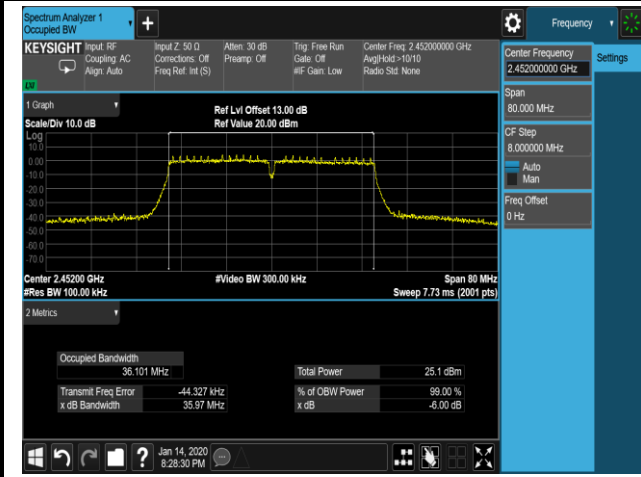


802.11ax-HE20 6dB Bandwidth - Ant 0 / Ant 0 + 1


Channel 01 (2412MHz)

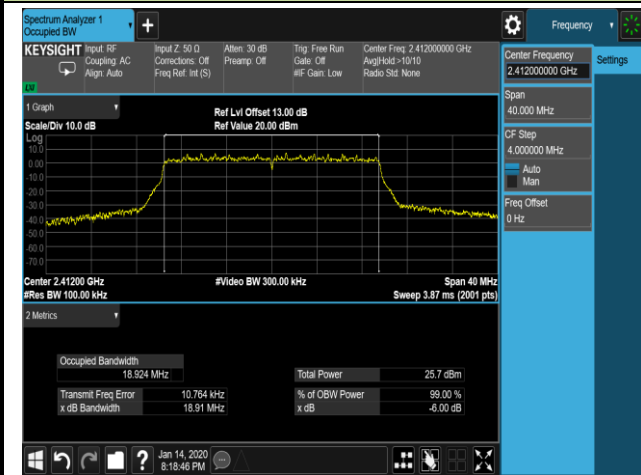

Channel 06 (2437MHz)

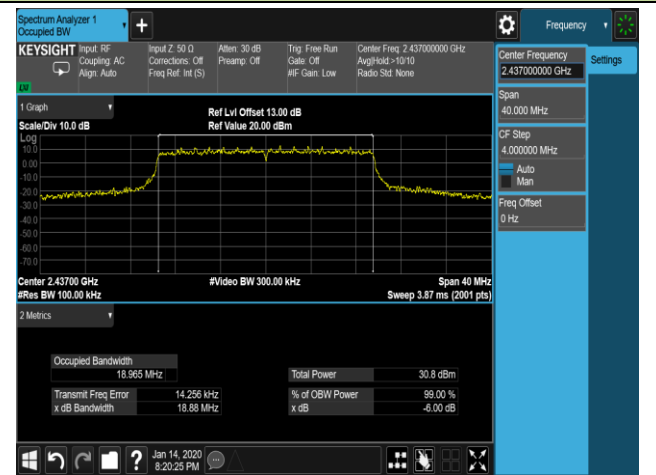


Channel 11 (2462MHz)

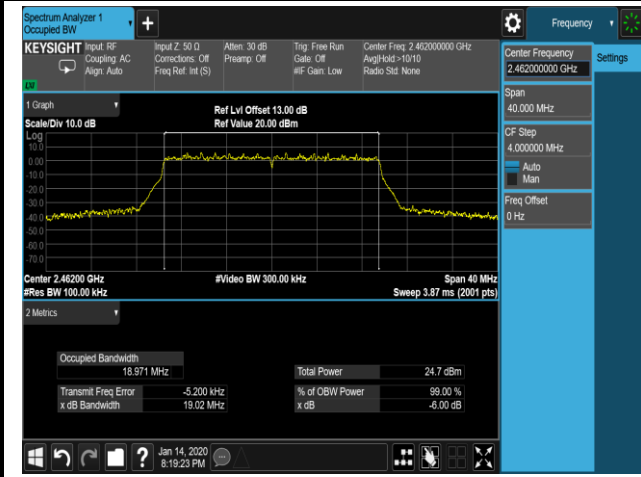


802.11ax-HE40 6dB Bandwidth - Ant 0 / Ant 0 + 1


Channel 03 (2422MHz)

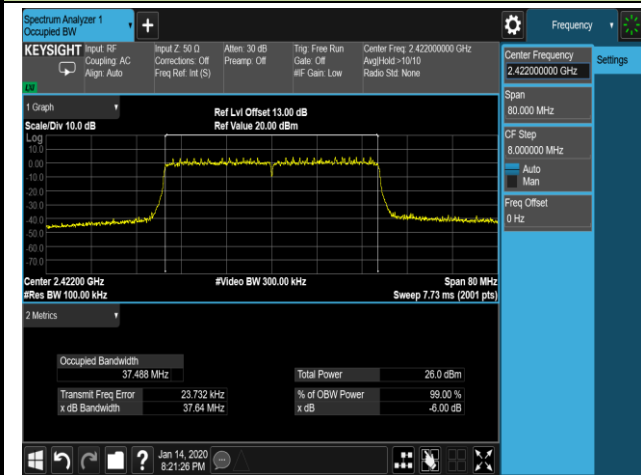

Channel 06 (2437MHz)

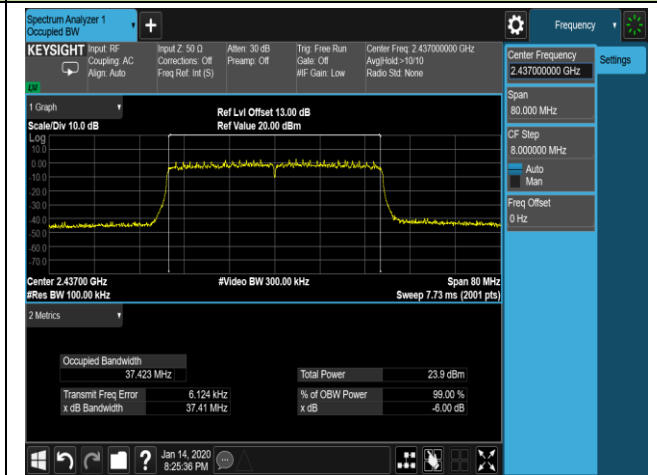

Channel 09 (2452MHz)

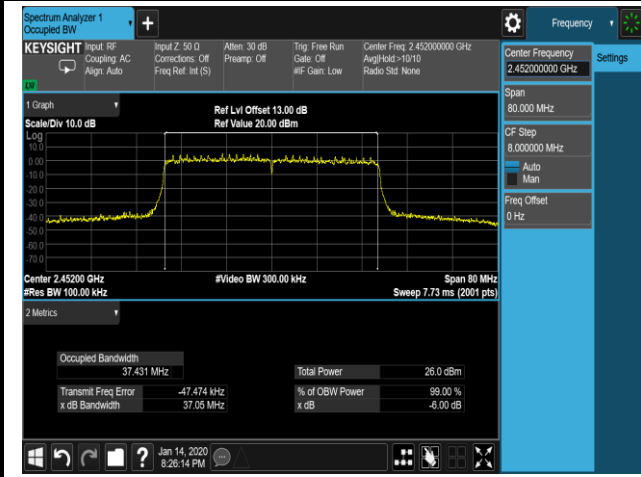

### 7.3. Output Power Measurement

#### 7.3.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 7.3.2. Test Procedure Used


ANSI C63.10 Section 11.9.2.3

#### 7.3.3. Test Setting

##### Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

#### 7.3.4. Test Setup

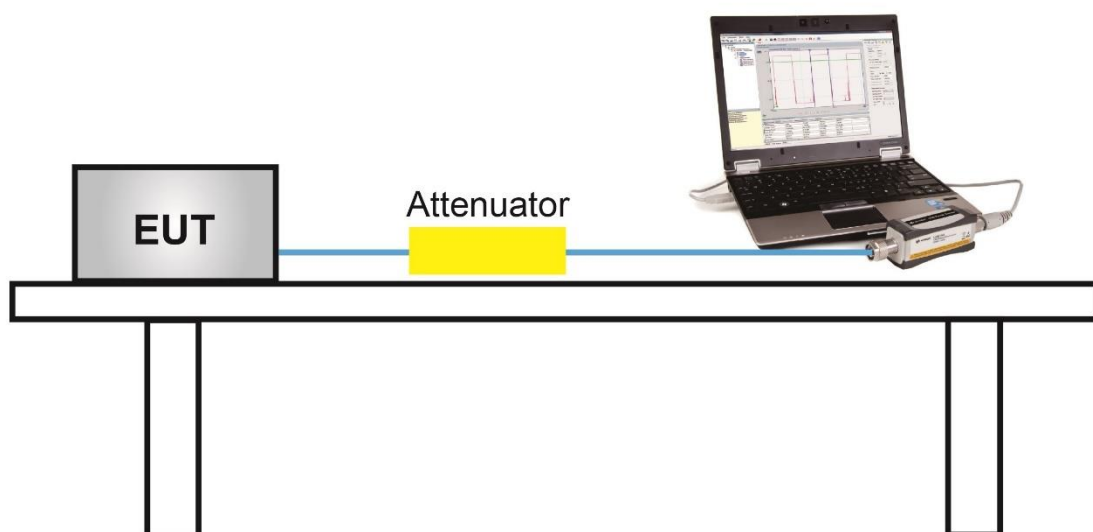

### 7.3.5. Test Result of Output Power

Power output test was verified over all data rates of each mode shown as below table, and then choose the maximum power output (gray marker) for final test of each channel.

For Ant 0 / Ant 0 + 1 port of Omni Antenna (AP-ANT-20W):

Test Mode	Bandwidth (MHz)	Channel No.	Frequency (MHz)	Data Rate/ MCS	Average Power (dBm)
802.11b	20	06	2437	1Mbps	22.83
				5.5Mbps	22.64
				11Mbps	22.51
802.11g	20	06	2437	6Mbps	22.69
				24Mbps	22.45
				54Mbps	22.36
802.11n	20	06	2437	MCS0	22.72
				MCS3	22.50
				MCS7	22.35
802.11n	40	06	2437	MCS0	20.65
				MCS3	20.41
				MCS7	20.14
802.11ax-HE	20	06	2437	MCS0	22.09
				MCS5	21.84
				MCS11	21.64
802.11ax-HE	40	06	2437	MCS0	20.43
				MCS5	20.25
				MCS11	20.02

Product	ACCESS POINT	Temperature	22 ~ 27°C
Test Engineer	Kevin Ker	Relative Humidity	46 ~ 65%
Test Site	SR2	Test Date	2020/01/14 ~ 2020/03/01
Antenna Type	Omni Antenna (AP-ANT-20W)	Test Item	Output Power

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Limit (dBm)	Result
11b	1Mbps	01	2412	22.02	21.78	24.91	≤ 30.00	Pass
11b	1Mbps	06	2437	22.83	22.11	25.50	≤ 30.00	Pass
11b	1Mbps	11	2462	21.92	22.09	25.02	≤ 30.00	Pass
11g	6Mbps	01	2412	18.35	18.52	21.45	≤ 30.00	Pass
11g	6Mbps	02	2417	22.01	21.97	25.00	≤ 30.00	Pass
11g	6Mbps	06	2437	22.69	22.37	25.54	≤ 30.00	Pass
11g	6Mbps	10	2457	21.62	21.58	24.61	≤ 30.00	Pass
11g	6Mbps	11	2462	17.53	17.55	20.55	≤ 30.00	Pass
11n-HT20	MCS0	01	2412	18.64	18.81	21.74	≤ 30.00	Pass
11n-HT20	MCS0	02	2417	22.18	21.98	25.09	≤ 30.00	Pass
11n-HT20	MCS0	06	2437	22.72	22.39	25.57	≤ 30.00	Pass
11n-HT20	MCS0	10	2457	21.69	21.67	24.69	≤ 30.00	Pass
11n-HT20	MCS0	11	2462	17.68	17.53	20.62	≤ 30.00	Pass
11n-HT40	MCS0	03	2422	18.00	17.89	20.96	≤ 30.00	Pass
11n-HT40	MCS0	04	2427	20.21	20.53	23.38	≤ 30.00	Pass
11n-HT40	MCS0	06	2437	20.65	21.46	24.08	≤ 30.00	Pass
11n-HT40	MCS0	08	2447	18.05	18.12	21.10	≤ 30.00	Pass
11n-HT40	MCS0	09	2452	17.45	16.89	20.19	≤ 30.00	Pass
11ax-HE20	MCS0	01	2412	17.89	17.94	20.93	≤ 30.00	Pass
11ax-HE20	MCS0	02	2417	20.67	20.51	23.60	≤ 30.00	Pass
11ax-HE20	MCS0	06	2437	22.09	21.98	25.05	≤ 30.00	Pass
11ax-HE20	MCS0	10	2457	20.11	20.03	23.08	≤ 30.00	Pass
11ax-HE20	MCS0	11	2462	16.94	16.78	19.87	≤ 30.00	Pass
11ax-HE40	MCS0	03	2422	17.93	17.64	20.80	≤ 30.00	Pass
11ax-HE40	MCS0	04	2427	19.76	20.08	22.93	≤ 30.00	Pass
11ax-HE40	MCS0	06	2437	20.43	20.71	23.58	≤ 30.00	Pass
11ax-HE40	MCS0	08	2447	18.04	17.94	21.00	≤ 30.00	Pass
11ax-HE40	MCS0	09	2452	18.14	17.59	20.88	≤ 30.00	Pass

Note: Total Average Power (dBm) =  $10 \cdot \log\{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$  (dBm).

## **7.4. Power Spectral Density Measurement**

### **7.4.1. Test Limit**

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.

### **7.4.2. Test Procedure Used**

ANSI C63.10 Section 11.10.6


### **7.4.3. Test Setting**

1. Measure the duty cycle (x) of the transmitter output signal.
2. Set instrument center frequency to DTS channel center frequency.
3. Set span to at least 1.5 times the OBW.
4. RBW = 10 kHz.
5. VBW = 30 kHz.
6. Detector = RMS.
7. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
8. Sweep time = auto couple.
9. Don't use sweep triggering. Allow sweep to "free run".
10. Employ trace averaging (RMS) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. Add  $10 \log (1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.



### 7.4.4. Test Setup

## Spectrum Analyzer

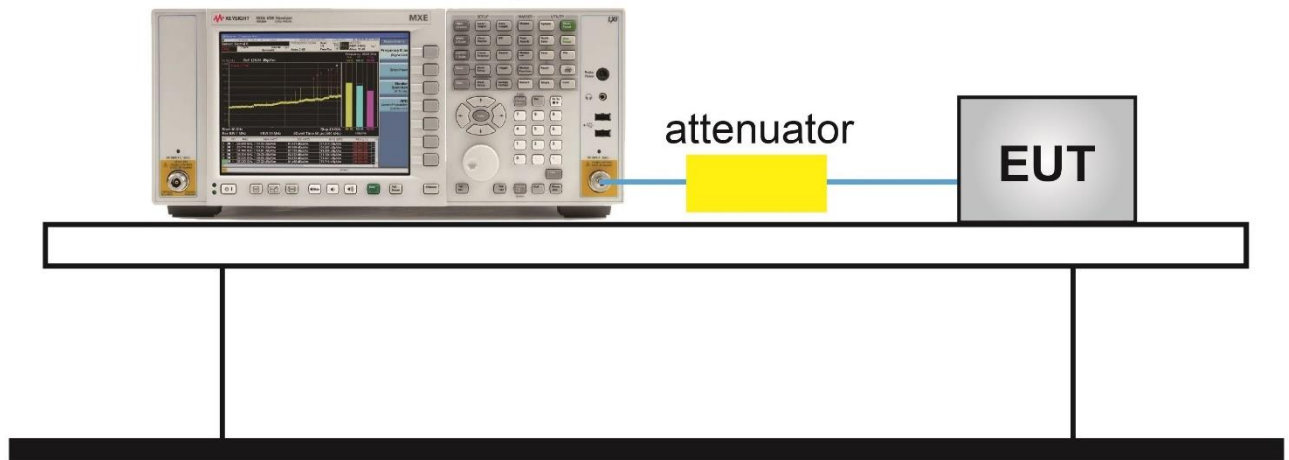

### 7.4.5. Test Result

Product	ACCESS POINT	Temperature	22 ~ 25°C
Test Engineer	Kevin Ker	Relative Humidity	46 ~ 60%
Test Site	SR2	Test Date	2020/01/14 ~ 2020/03/01
Antenna Type	Omni Antenna (AP-ANT-20W)	Test Item	Power Spectral Density


Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 AVGPSD (dBm / 10kHz)	Ant 1 AVGPSD (dBm / 10kHz)	Duty Cycle (%)	Total AVGPSD (dBm / 10kHz)	Limit (dBm / 3kHz)	Result
11b	1Mbps	01	2412	-8.77	-8.21	95.07	-5.25	≤ 5.98	Pass
11b	1Mbps	06	2437	-8.52	-8.54	95.07	-5.30	≤ 5.98	Pass
11b	1Mbps	11	2462	-9.90	-10.19	95.07	-6.81	≤ 5.98	Pass
11g	6Mbps	01	2412	-9.21	-9.18	94.81	-5.95	≤ 5.98	Pass
11g	6Mbps	06	2437	-4.73	-5.16	94.81	-1.70	≤ 5.98	Pass
11g	6Mbps	11	2462	-10.47	-10.52	94.81	-7.25	≤ 5.98	Pass
11n-HT20	MCS0	01	2412	-9.22	-9.39	97.96	-6.20	≤ 5.98	Pass
11n-HT20	MCS0	06	2437	-5.34	-5.78	97.96	-2.45	≤ 5.98	Pass
11n-HT20	MCS0	11	2462	-10.36	-10.59	97.96	-7.37	≤ 5.98	Pass
11n-HT40	MCS0	03	2422	-11.39	-10.97	96.40	-8.01	≤ 5.98	Pass
11n-HT40	MCS0	06	2437	-11.14	-10.40	96.40	-7.58	≤ 5.98	Pass
11n-HT40	MCS0	09	2452	-12.97	-13.62	96.40	-10.11	≤ 5.98	Pass
11ax-HE20	MCS0	01	2412	-10.54	-10.74	97.51	-7.52	≤ 5.98	Pass
11ax-HE20	MCS0	06	2437	-5.65	-5.74	97.51	-2.57	≤ 5.98	Pass
11ax-HE20	MCS0	11	2462	-11.19	-11.07	97.51	-8.01	≤ 5.98	Pass
11ax-HE40	MCS0	03	2422	-12.76	-12.88	95.66	-9.62	≤ 5.98	Pass
11ax-HE40	MCS0	06	2437	-11.14	-11.16	95.66	-7.95	≤ 5.98	Pass
11ax-HE40	MCS0	09	2452	-13.10	-13.39	95.66	-10.04	≤ 5.98	Pass

Note 1: The total AVGPSD =  $10 \cdot \log\{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\} + 10 \cdot \log(1/\text{Duty cycle})$ .


Note 2: Total AVGPSD (dBm / 10kHz) << Limit (dBm / 3kHz), so there is no necessary to conversion unit.

802.11b AVGPDS - Ant 0 / Ant 0 + 1



Channel 01 (2412MHz)

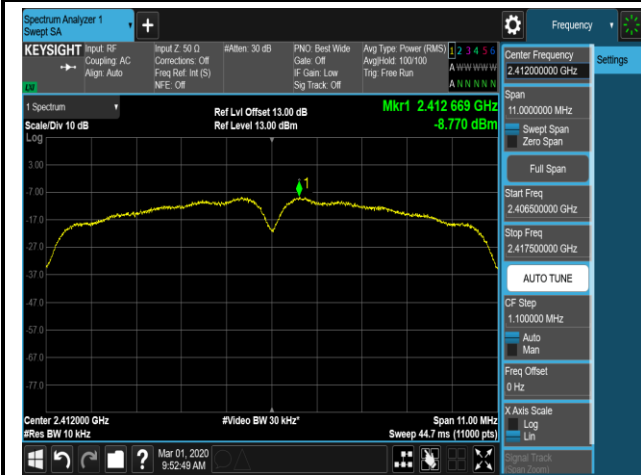

Channel 06 (2437MHz)

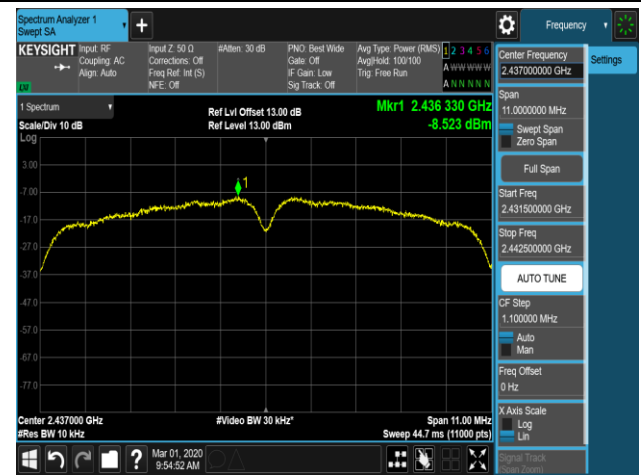


Channel 11 (2462MHz)

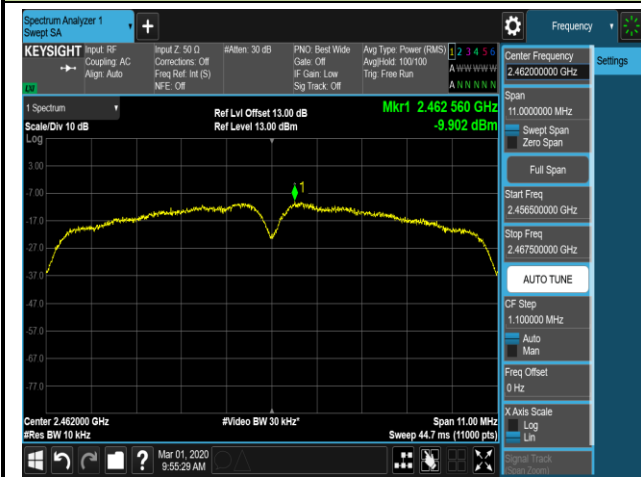


802.11g AVGPDS - Ant 0 / Ant 0 + 1


Channel 01 (2412MHz)

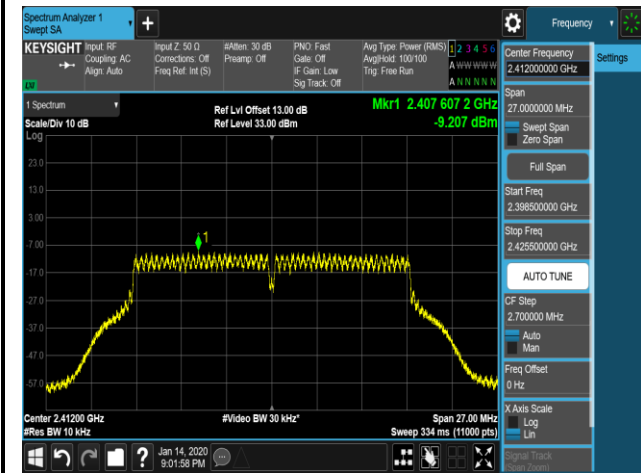

Channel 06 (2437MHz)

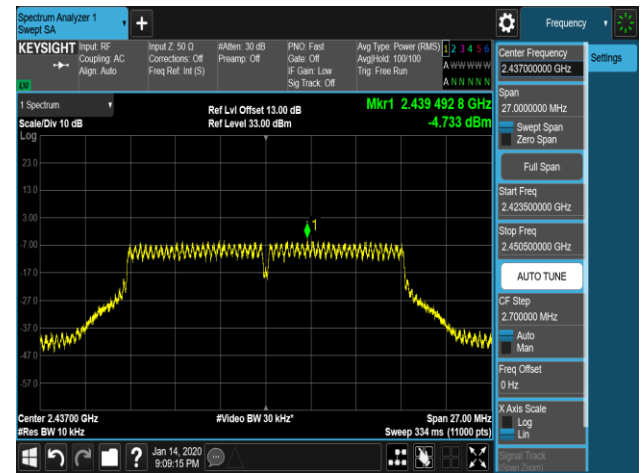


Channel 11 (2462MHz)

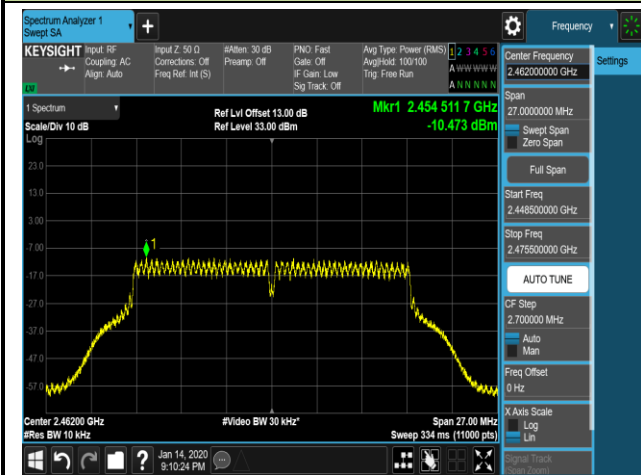


802.11n-HT20 AVGPDS - Ant 0 / Ant 0 + 1


Channel 01 (2412MHz)

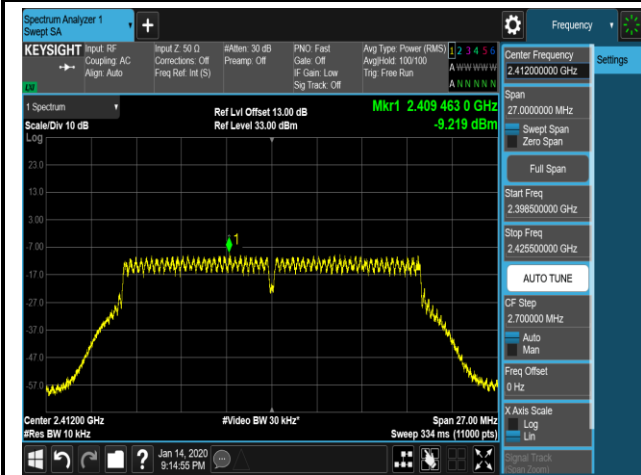

Channel 06 (2437MHz)

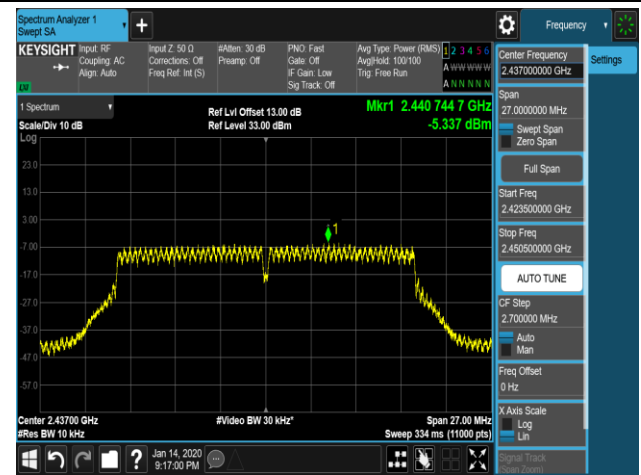


Channel 11 (2462MHz)

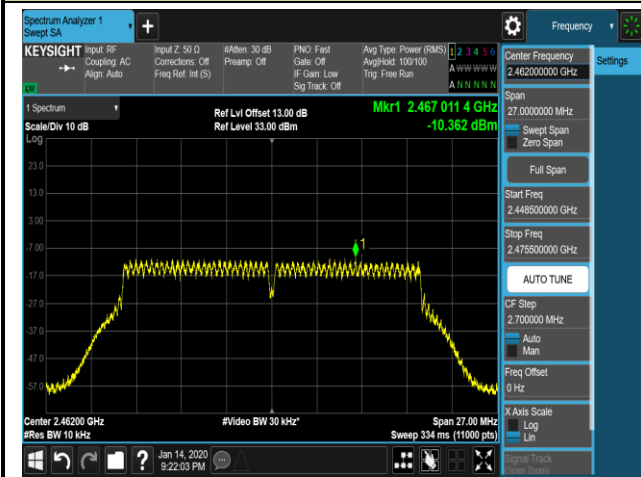


802.11n-HT40 AVGPSD - Ant 0 / Ant 0 + 1


Channel 03 (2422MHz)



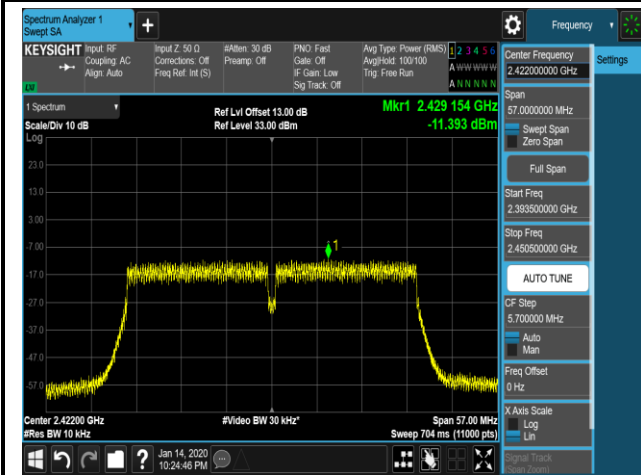


Channel 06 (2437MHz)

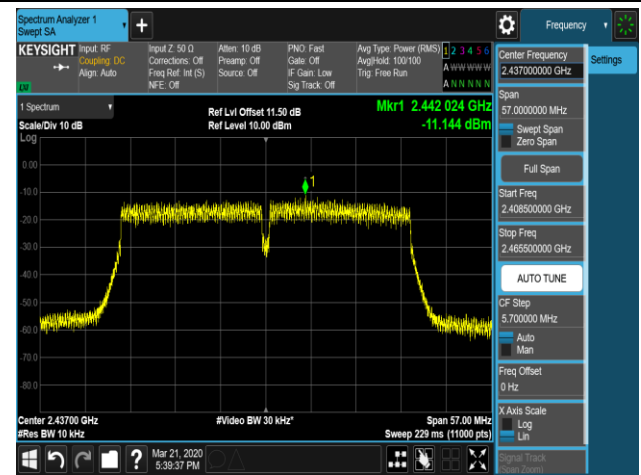


Channel 09 (2452MHz)

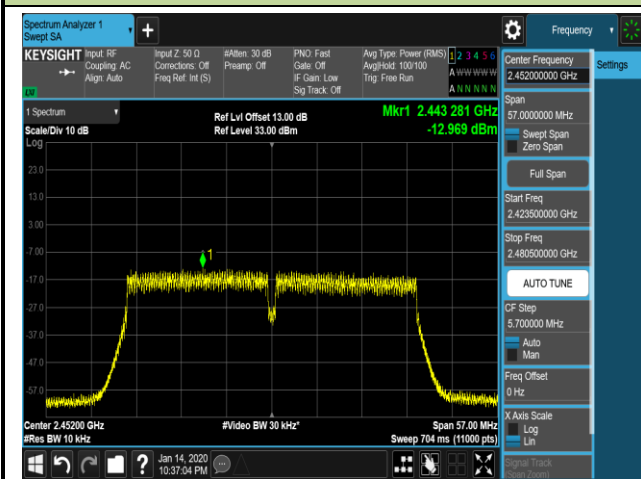

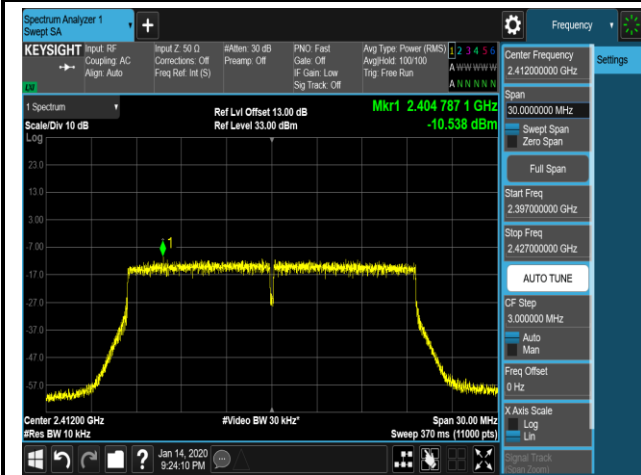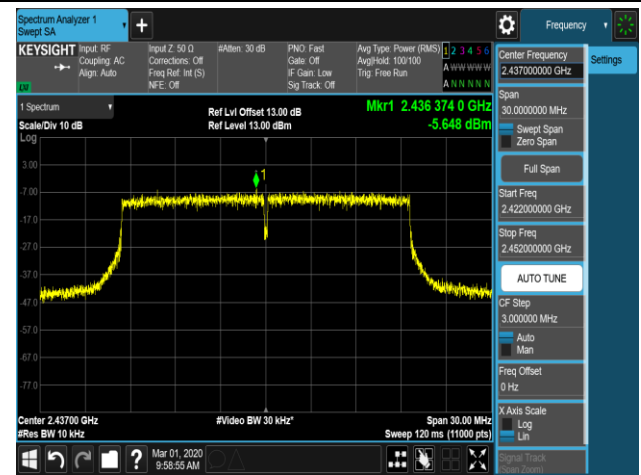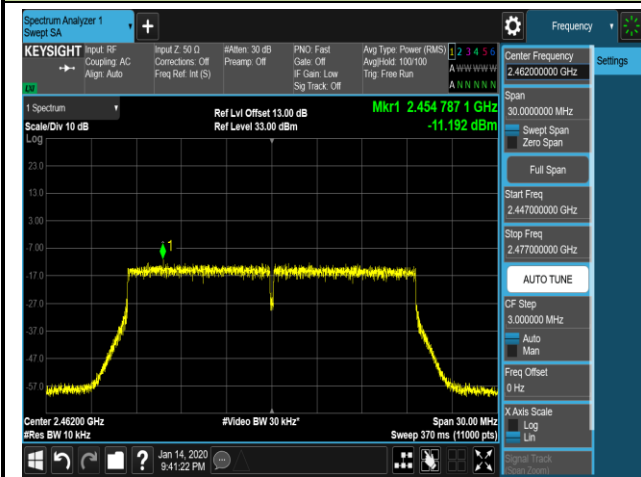
**802.11ax-HE20 AVGPDS - Ant 0 / Ant 0 + 1**
**Channel 01 (2412MHz)**

**Channel 06 (2437MHz)**

**Channel 11 (2462MHz)**

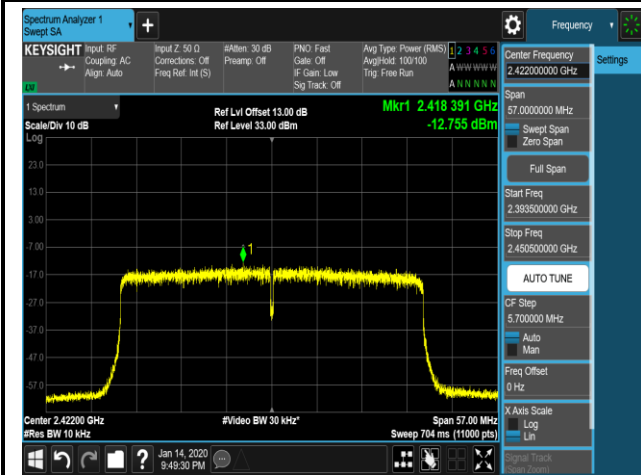
802.11ax-HE40 AVGPSPD - Ant 0 / Ant 0 + 1


Channel 03 (2422MHz)

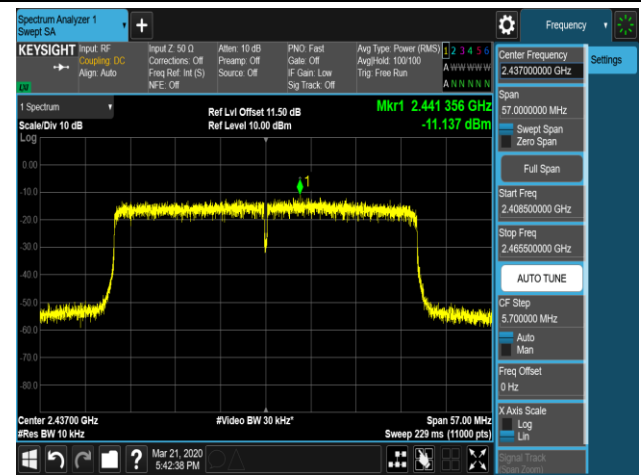

Channel 06 (2437MHz)




Channel 09 (2452MHz)

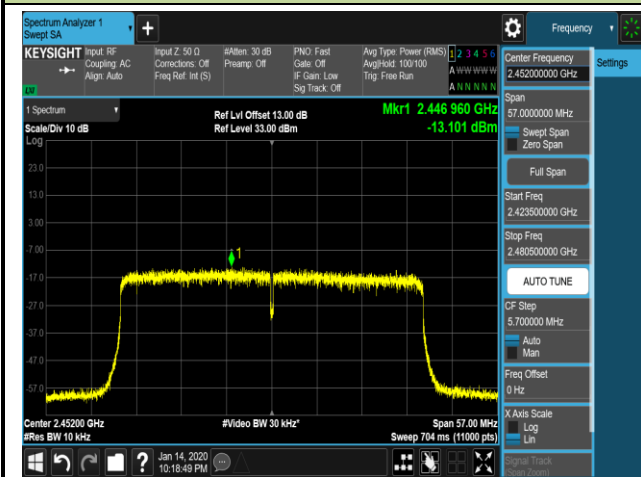




802.11b AVGPDS - Ant 1 / Ant 0 + 1

Channel 01 (2412MHz)

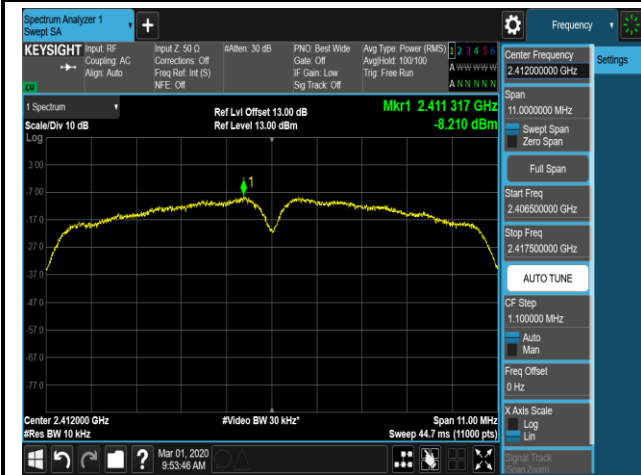

Channel 06 (2437MHz)

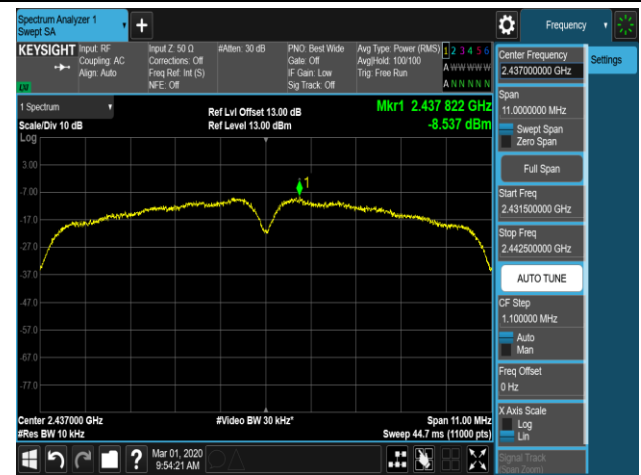


Channel 11 (2462MHz)




802.11g AVGPDS - Ant 1 / Ant 0 + 1

Channel 01 (2412MHz)

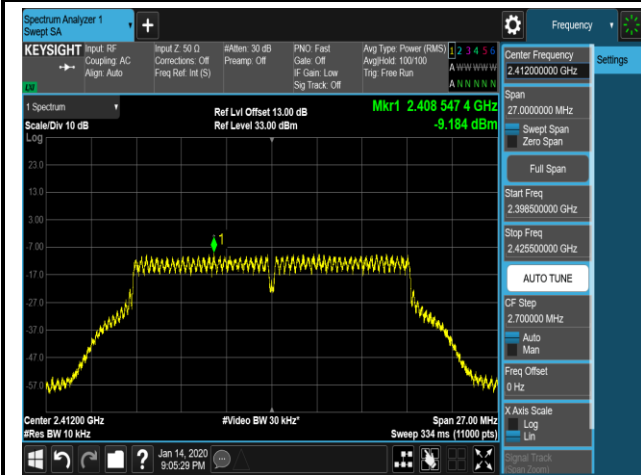

Channel 06 (2437MHz)

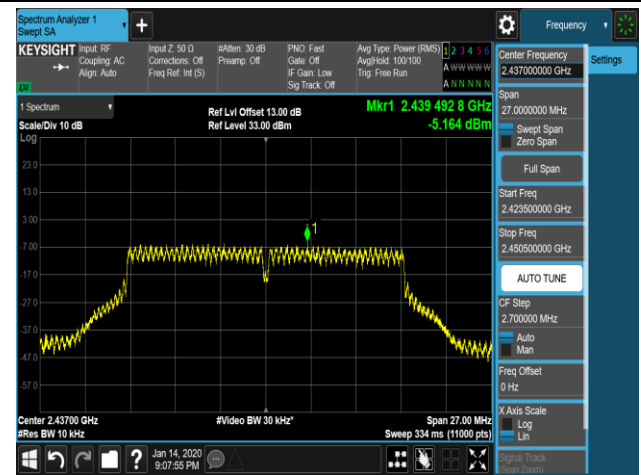

Channel 11 (2462MHz)

