


PART NUMBER BLOCK	
PART NUMBER	REV

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

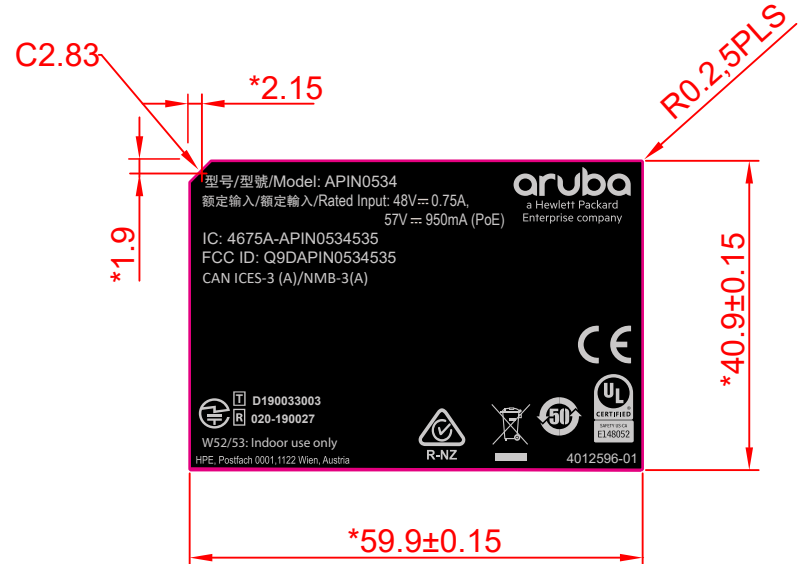

NOTE:

- MATERIAL: WHITE MATTE PET, 金利寶HTYL75(EB) T=0.075
ADHESIVE: ACRYLIC 背膠
- FINISH: FINISH: 上霧PET,金利寶TPATM(T)(30)J ,T=0.025
- COLOR: PMS BLACK C ■
PMS GRAY 3C ■
刀模: ■,R=0.2
- UL APPROVED, PGDQ2.
- 被貼物: 鋁壓鑄
- TEMPERATURE RESISTANT= 120° C
- 印刷公差: 尺寸30mm以下為±0.2mm, 30~120mm為±0.3mm, 120~315mm為±0.5mm, 315以上±0.8mm
- 捲狀出貨, 離型紙左右間距各3±0.5mm, 上下間距各3±0.3mm
- TEST REQUIREMENTS

TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1 附著力測試	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5% is affected.

		UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE: INTEGER DIMENSIONS ±0.5 ANGULAR DIMENSIONS ±2° 1 PLACE DECIMAL ±0.2 HOLES UNDER Ø5.00 ±0.2		啟碁科技股份有限公司 Wistron NeWeb Corp. 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726	
		MATERIAL: SEE NOTES		DWG TITLE	
		FINISH: SEE NOTES		LABEL,AP-534,4012596-01,RVAQ-52E	
RVAQ-52E		THIRD ANGLE PROJECTION	DRAWN	SIZE	DWG NO.
NEXT ASSY	USED ON		ENGR	A4	
APPLICATION			APVD	SCALE	REV
				1/1	1 OF 1