


PART NUMBER BLOCK	
PART NUMBER	REV

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

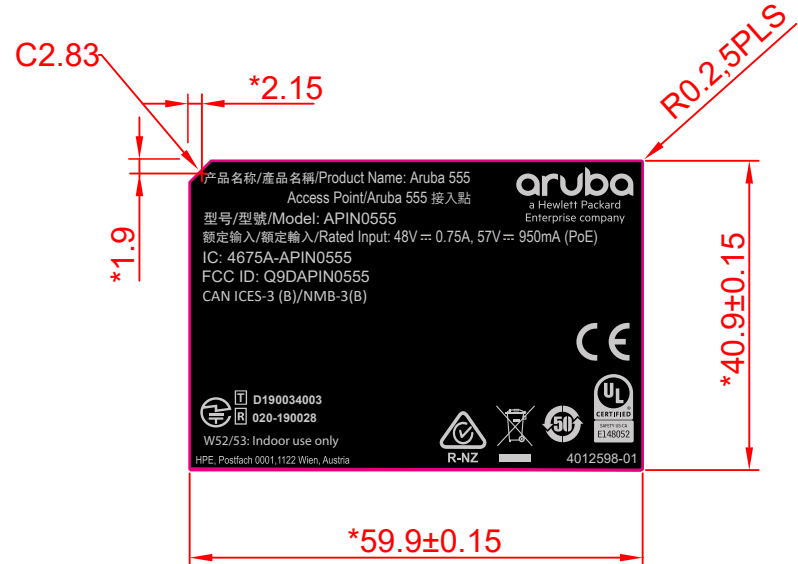

**NOTE:**

- 1.MATERIAL: PC FILM(SABIC-LEXAN 8B35), t=0.127
- 2.ADHESIVE: 3M-467,t=0.05 mm
3. COLOR: PMS BLACK C ■  
PMS GRAY 3C ■  
刀模: ■,R=0.2
4. UL APPROVED, PGDQ2.
- 5.被貼物:鋁壓鑄
- 6.TEMPERATURE RESISTANT= 120° C
- 7.印刷公差:尺寸30mm以下為 $\pm 0.2$ mm,30~120mm為 $\pm 0.3$ mm,120~315mm為 $\pm 0.5$ mm,315以上 $\pm 0.8$ mm
- 8.片狀入料

**9.TEST REQUIREMENTS**

TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1 附著力測試	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5% is affected.

		UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE:		<b>啟碁科技股份有限公司</b> Wistron NeWeb Corp. 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726	
		INTEGER DIMENSIONS $\pm 0.5$ 1 PLACE DECIMAL $\pm 0.2$	ANGULAR DIMENSIONS $\pm 2'$ HOLES UNDER $\varnothing 5.00 \pm 0.2$		
		MATERIAL: SEE NOTES		DWG TITLE	
		FINISH: SEE NOTES		LABEL, 4012598-01, AP-555, RVAQ-53I	
		RVAQ-53I	THIRD ANGLE PROJECTION	SIZE	DWG NO.
NEXT ASSY	USED ON			A4	
APPLICATION				SCALE	REV
				1/1	1 OF 1