





# MEASUREMENT REPORT

## FCC PART 15 Subpart C / ZigBee

---

**FCC ID:** Q9DAPIN0615  
**Applicant:** Hewlett Packard Enterprise Company  
**Application Type:** Certification  
**Product:** ACCESS POINT  
**Model No.:** APIN0615  
**Brand Name:**    
**FCC Classification:** Digital Transmission System (DTS)  
**FCC Rule Part(s):** Part15 Subpart C (Section 15.247)  
**Test Result:** Complies  
**Test Date:** September 03, 2021 ~ June 07, 2022

**Reviewed By:**   
\_\_\_\_\_  
( Paddy Chen )  
**Approved By:**   
\_\_\_\_\_  
(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

---

## Revision History

Report No.	Version	Description	Issue Date	Note
2105TW0006-U2	V1.0	Initial Report	06-22-2022	Valid

## CONTENTS

Description	Page
<b>General Information</b> .....	<b>5</b>
<b>1. INTRODUCTION</b> .....	<b>6</b>
1.1. Scope .....	6
1.2. MRT Test Location .....	6
<b>2. PRODUCT INFORMATION</b> .....	<b>7</b>
2.1. Equipment Description.....	7
2.2. Product Specification Subjective to this Report.....	7
2.3. Working Frequencies for this report .....	7
2.4. Duty Cycle .....	8
2.5. Description of Test Configuration and Software .....	9
2.6. Applied Standards .....	9
2.7. EMI Suppression Device(s)/Modifications .....	9
2.8. Labeling Requirements .....	10
<b>3. DESCRIPTION of TEST</b> .....	<b>11</b>
3.1. Evaluation Procedure .....	11
3.2. AC Line Conducted Emissions.....	11
3.3. Radiated Emissions .....	12
<b>4. ANTENNA REQUIREMENTS</b> .....	<b>13</b>
<b>5. TEST EQUIPMENT CALIBRATION DATE</b> .....	<b>14</b>
<b>6. MEASUREMENT UNCERTAINTY</b> .....	<b>16</b>
<b>7. TEST RESULT</b> .....	<b>17</b>
7.1. Summary .....	17
7.2. 6dB Bandwidth Measurement.....	18
7.2.1. Test Limit.....	18
7.2.2. Test Procedure used.....	18
7.2.3. Test Setting .....	18
7.2.4. Test Setup .....	18
7.2.5. Test Result .....	19
7.3. Output Power Measurement .....	20
7.3.1. Test Limit.....	20
7.3.2. Test Procedure Used .....	20
7.3.3. Test Setting .....	20
7.3.4. Test Setup .....	21
7.3.5. Test Result .....	22
7.4. Power Spectral Density Measurement .....	23
7.4.1. Test Limit.....	23
7.4.2. Test Procedure Used .....	23

---

7.4.3. Test Setting .....	23
7.4.4. Test Setup .....	23
7.4.5. Test Result .....	24
7.5. Conducted Band Edge and Out-of-Band Emissions.....	25
7.5.1. Test Limit .....	25
7.5.2. Test Procedure Used .....	25
7.5.3. Test Setting .....	25
7.5.4. Test Setup .....	26
7.5.5. Test Result .....	27
7.6. Radiated Spurious Emission Measurement .....	30
7.6.1. Test Limit .....	30
7.6.2. Test Procedure Used .....	30
7.6.3. Test Setting .....	30
7.6.4. Test Setup .....	32
7.6.5. Test Result .....	33
7.7. Radiated Restricted Band Edge Measurement .....	47
7.7.1. Test Limit .....	47
7.7.2. Test Procedure Used .....	48
7.7.3. Test Setting .....	48
7.7.4. Test Setup .....	49
7.7.5. Test Result .....	50
7.8. AC Conducted Emissions Measurement.....	54
7.8.1. Test Limit .....	54
7.8.2. Test Setup .....	54
7.8.3. Test Result .....	55
<b>Appendix A - Test Setup Photograph .....</b>	<b>57</b>
<b>Appendix B - EUT Photograph.....</b>	<b>58</b>

## General Information

<b>Applicant</b>	Hewlett Packard Enterprise Company
<b>Applicant Address</b>	3333 Scott Blvd, Santa Clara, CA 95054, USA
<b>Manufacturer</b>	Hewlett Packard Enterprise Company
<b>Manufacturer Address</b>	3333 Scott Blvd, Santa Clara, CA 95054, USA
<b>Test Site</b>	MRT Technology (Taiwan) Co., Ltd
<b>Test Site Address</b>	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
<b>MRT FCC Registration No.</b>	291082
<b>Test Device Serial No.</b>	VNMFKZD00J <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

## Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Taiwan, EU and TELEC Rules.


## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

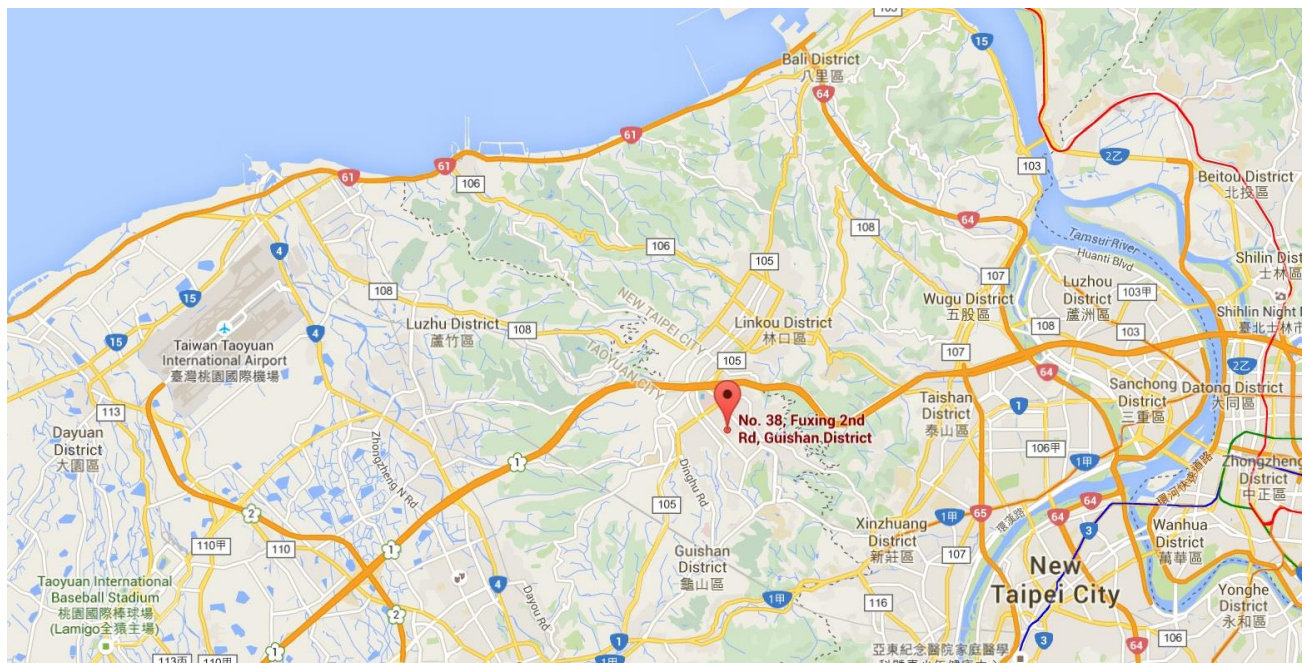

## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

Product Name	ACCESS POINT
Model No.	APIN0615
Software Version	V1.1
Wi-Fi Specification	802.11a/b/g/n/ac/ax
Bluetooth Specification	v5.0 single mode, BLE only
Zigbee Specification	802.15.4
GNSS Specification	GPS, GLONASS, Galileo
Operating Temperature	0 ~ 50 °C
Antenna Information	Refer to Section 2.2
Power Type	AC Adapter or PoE input
Operating Environment	Indoor Use
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

### 2.2. Product Specification Subjective to this Report

Zigbee Specification	802.15.4
Frequency Range	2405 ~ 2480 MHz
Channel Number	16
Type of Modulation	O-QPSK
Antenna Type	PIFA
Antenna Gain	2.6dBi

Note: For other features of this EUT, test report will be issued separately.

### 2.3. Working Frequencies for this report

Channel	Frequency	Channel	Frequency	Channel	Frequency
11	2405 MHz	12	2410 MHz	13	2415 MHz
14	2420 MHz	15	2425 MHz	16	2430 MHz
17	2435 MHz	18	2440 MHz	19	2445 MHz
20	2450 MHz	21	2455 MHz	22	2460 MHz
23	2465 MHz	24	2470 MHz	25	2475 MHz
26	2480 MHz	--	--	--	--

## 2.4. Duty Cycle

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	T (Transmission Duration)	Duty Cycle
802.15.4	858.8us	87.94%


Note 1: This duty cycle was only suitable for continuous transmission of signals via commands.

Note 2: The manufacturer, declared that the ZigBee operation, when implemented, will be limited to a max duty cycle of 10% or less in any 100ms period. So -20dB correction factor was used during peak and average band edge testing.



## 2.5. Description of Test Configuration and Software

The device was tested per the guidance ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

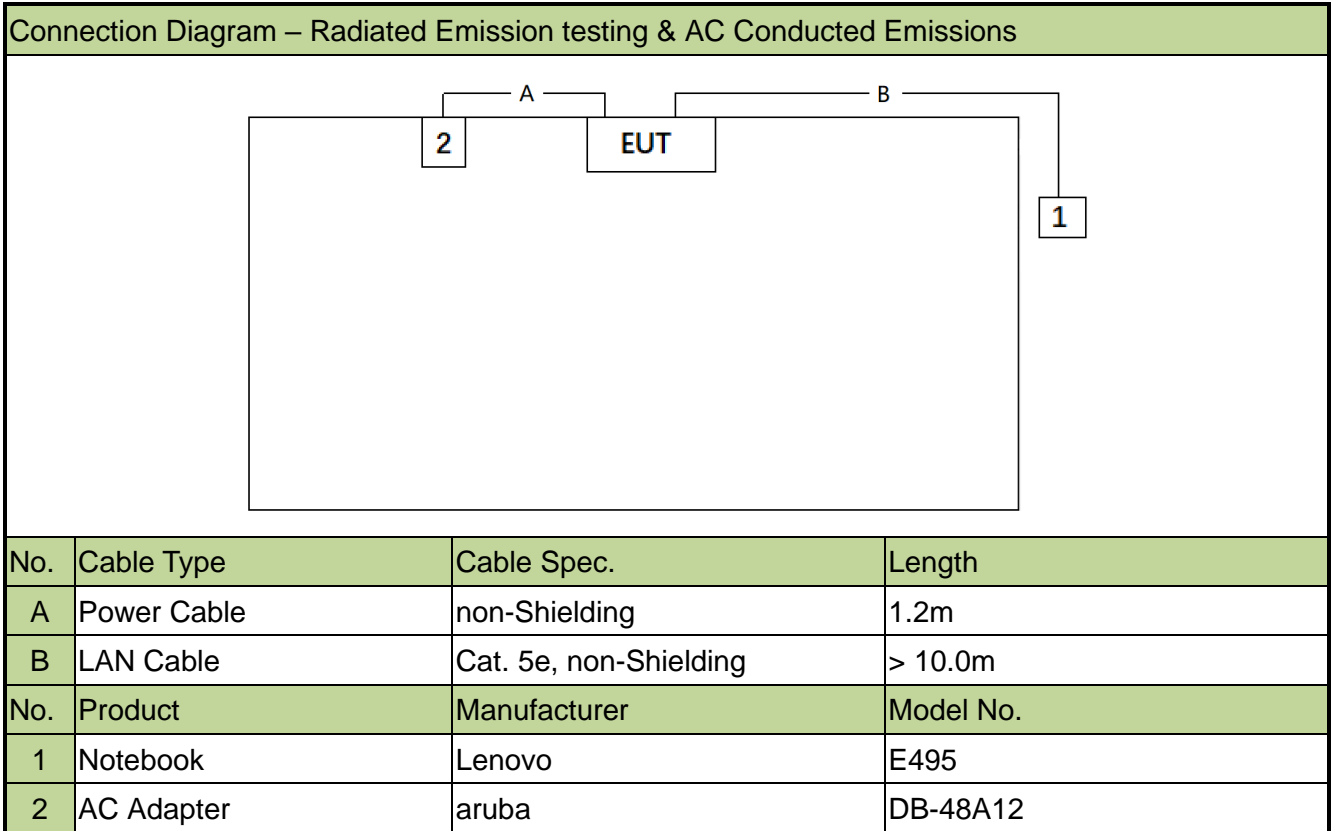

Note 1: The test utility software used during testing was “accessMTTool.exe” and command was provided by the manufacturer.

Note 2: Detail power setting refer to operation description.

## 2.6. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.10-2013
- Part15 Subpart C (Section 15.247)

## 2.7. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## **2.8. Labeling Requirements**

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

### **3. DESCRIPTION of TEST**

#### **3.1. Evaluation Procedure**

The measurement procedure described in the document titled “American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices” (ANSI C63.10-2013) was used in the measurement.

#### **3.2. AC Line Conducted Emissions**

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

## 4. ANTENNA REQUIREMENTS

### **Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

### **Conclusion:**

The unit complies with the requirement of §15.203.

## 5. TEST EQUIPMENT CALIBRATION DATE

### Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV 216	MRTTWA00019	1 year	2023/3/7
Two-Line V-Network	R&S	ENV 216	MRTTWA00020	1 year	2023/4/20
EMI Test Receiver	R&S	ESR3	MRTTWA00045	1 year	2023/5/9
Temperature/Humidity Meter	TFA	35.1083	MRTTWA00033	1 year	2022/7/5

### Radiated Emissions - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2022/10/4
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2023/5/24
Broadband Horn Antenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2023/3/30
Breitband Horn Antenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2023/3/29
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2023/3/30
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2023/3/30
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2023/3/16
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2023/3/9
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2022/10/18
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2022/7/19
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2023/6/14
Cable	Rosnol	K1K50-UP026 4-K1K50-4M	MRTTWE00012	1 year	2023/6/19
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2022/7/5

## Radiated Emissions - AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2022/10/4
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2023/5/24
Broadband Horn Antenna	RFSPIN	DRH18-E	MRTTWA00087	1 year	2023/5/10
Breitband Horn Antenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2023/3/29
Broadband Preamplifier	EMC Instruments corporation	EMC118A45S E	MRTTWA00088	1 year	2023/5/9
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2023/3/30
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2023/3/16
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2023/3/9
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2022/10/18
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2022/7/19
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00034	1 year	2022/6/28
Cable	HUBERSUHNER	EMC105-NM-NM-3000	MRTTWE00035	1 year	2022/6/28
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2022/7/5

## Conducted Test Equipment – SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2023/4/20
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2022/10/18
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2022/7/19
Programmable Temperature & Humidity Chamber	TEN BILLION	TTH-B3UP	MRTTWA00036	1 year	2022/6/14
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2023/3/16
Attenuator	WTI	218FS-20	MRTTWE00027	1 year	2022/6/16
Attenuator	WTI	218FS-10	MRTTWE00028	1 year	2022/6/16
Attenuator	WTI	218FS-06	MRTTWE00029	1 year	2022/6/16
Temperature/Humidity Meter	TFA	35.1083	MRTTWA00050	1 year	2022/7/2

## Test Software

Software	Version	Function
e3	9.160520a	EMI Test Software

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>AC Conducted Emission Measurement</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 150kHz~30MHz: 2.53dB
<b>Radiated Emission Measurement</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 9kHz ~ 1GHz: 4.25dB 1GHz ~ 40GHz: 4.45dB
<b>Conducted Power</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 0.84$ dB
<b>Conducted Spurious Emission</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 2.65$ dB
<b>Occupied Bandwidth</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 3.3%
<b>Temp. / Humidity</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): $\pm 0.82^{\circ}\text{C} / \pm 3\%$



## 7. TEST RESULT

### 7.1. Summary

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	$\leq 30\text{dBm}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$		Pass	Section 7.4
15.247(d)	Band Edge / Out-of-Band Emissions	$\geq 20\text{dBc (Peak)}$		Pass	Section 7.5
15.205 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6 & 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 3) Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.

## 7.2. 6dB Bandwidth Measurement

### 7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


### 7.2.2. Test Procedure used

ANSI C63.10-2013 Section 11.8

### 7.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3.  $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize


### 7.2.4. Test Setup

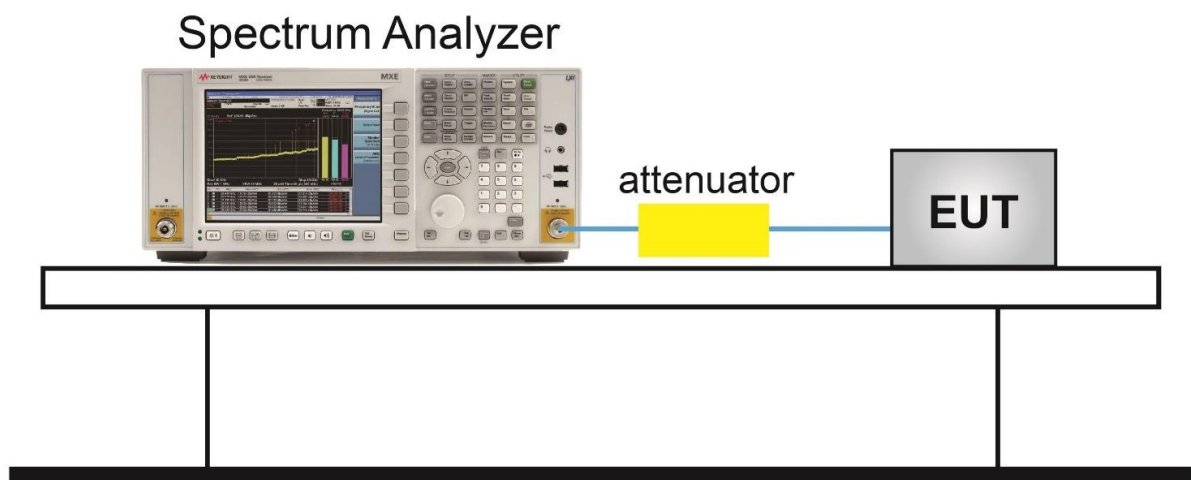

**7.2.5. Test Result**

Product	ACCESS POINT	Test Engineer	Eric Lin
Test Site	SR2	Test Date	2021/09/06

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.15.4	O-QPSK	11	2405	1.200	≥ 0.5	Pass
802.15.4	O-QPSK	18	2440	1.195	≥ 0.5	Pass
802.15.4	O-QPSK	26	2480	1.181	≥ 0.5	Pass

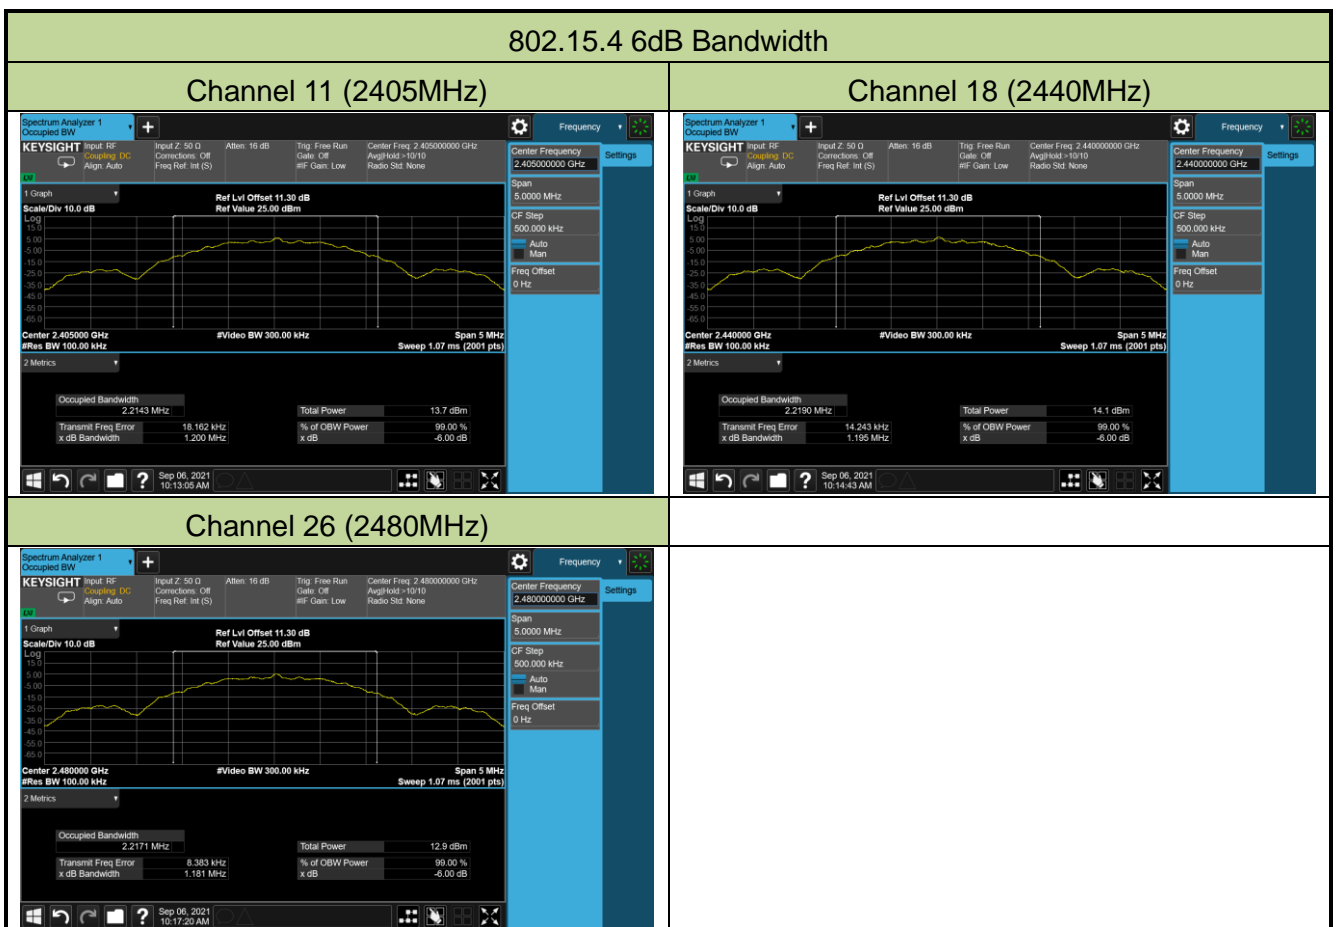

### **7.3. Output Power Measurement**

#### **7.3.1. Test Limit**

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **7.3.2. Test Procedure Used**

ANSI C63.10-2013 Section 11.9.1.3

ANSI C63.10-2013 Section 11.9.2.3

#### **7.3.3. Test Setting**


##### **Method PKPM1 (Peak Power Measurement)**

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

##### **Average Power Measurement**

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

### 7.3.4. Test Setup

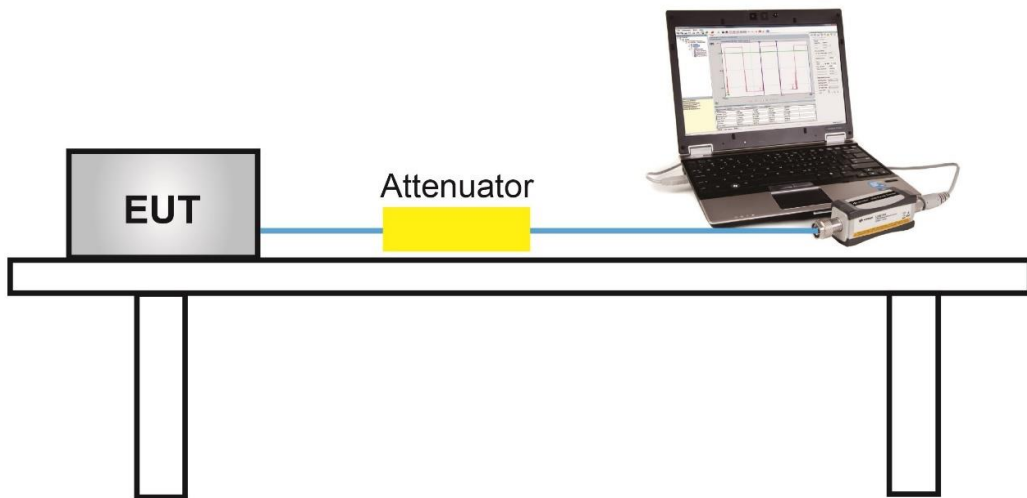

### 7.3.5. Test Result

Product	ACCESS POINT	Test Engineer	Eric Lin
Test Site	SR2	Test Date	2021/09/06

#### Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	7.11	≤ 30.00	Pass
802.15.4	O-QPSK	18	2440	7.51	≤ 30.00	Pass
802.15.4	O-QPSK	26	2480	6.41	≤ 30.00	Pass

#### Test Result of Average Output Power (Reporting Only)

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	6.58	≤ 30.00	Pass
802.15.4	O-QPSK	18	2440	7.07	≤ 30.00	Pass
802.15.4	O-QPSK	26	2480	5.74	≤ 30.00	Pass

## 7.4. Power Spectral Density Measurement

### 7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


### 7.4.2. Test Procedure Used

ANSI C63.10-2013 Section 11.10.2

### 7.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize


### 7.4.4. Test Setup

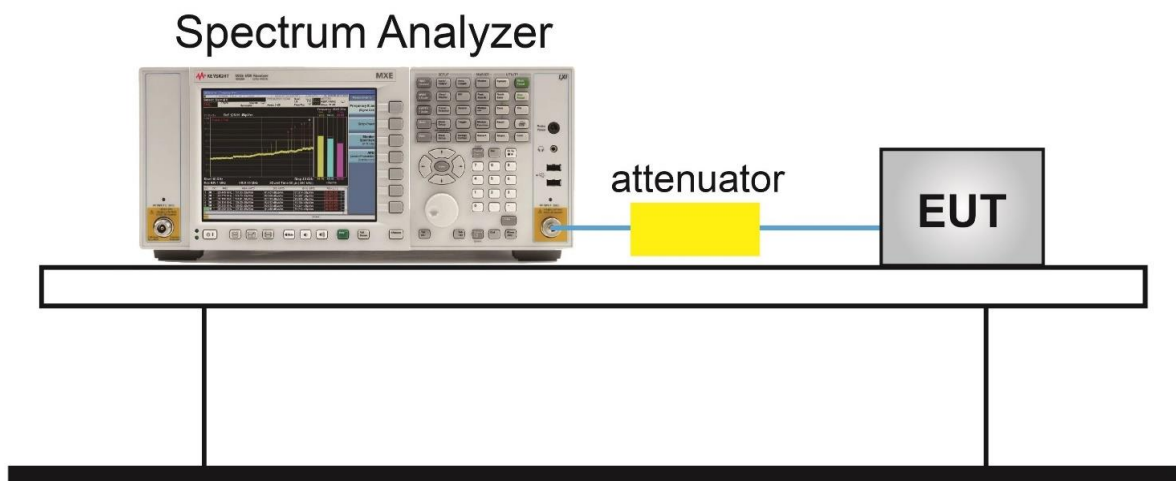

**7.4.5. Test Result**

Product	ACCESS POINT	Test Engineer	Eric Lin
Test Site	SR2	Test Date	2021/09/06

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	PK PSD (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
802.15.4	O-QPSK	11	2405	-7.30	≤ 8.00	Pass
802.15.4	O-QPSK	18	2440	-7.19	≤ 8.00	Pass
802.15.4	O-QPSK	26	2480	-8.47	≤ 8.00	Pass

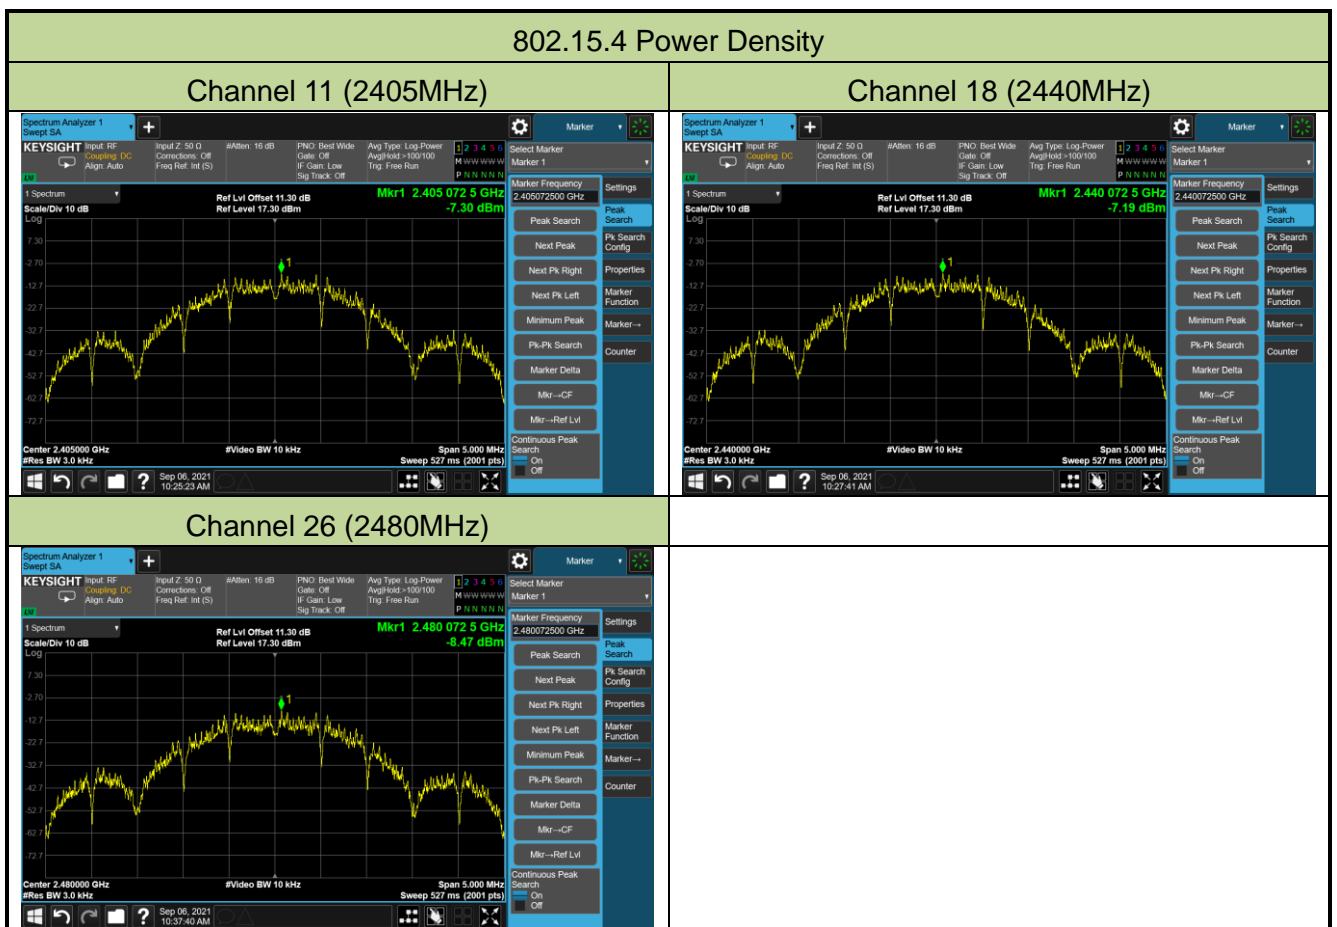



## **7.5. Conducted Band Edge and Out-of-Band Emissions**

### **7.5.1. Test Limit**

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

### **7.5.2. Test Procedure Used**

ANSI C63.10-2013 Section 11.11

### **7.5.3. Test Setting**


#### **Reference level measurement**

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to  $\geq 1.5$  times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW  $\geq 3 \times$  RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

#### **Emission level measurement**

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### 7.5.4. Test Setup

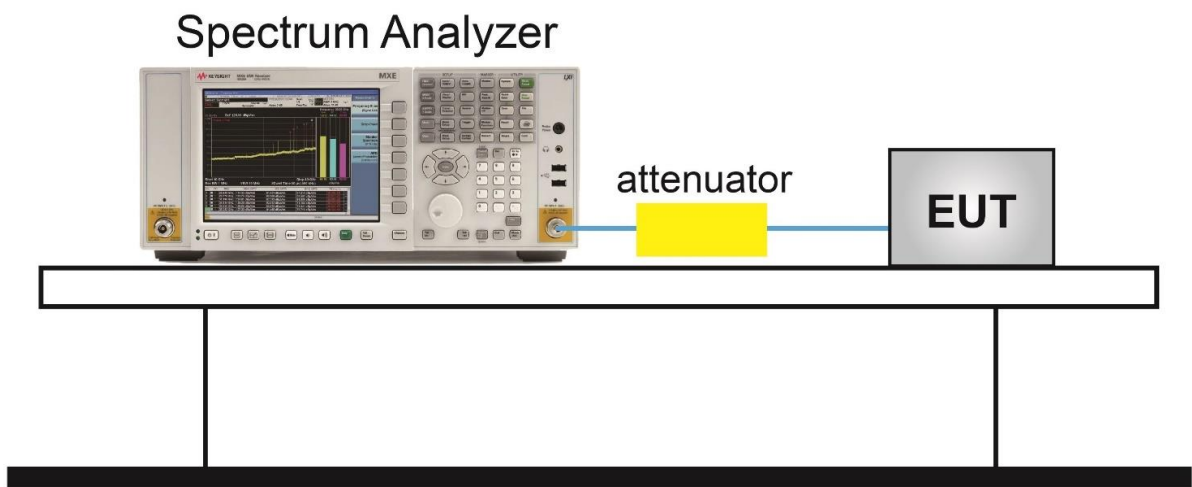

**7.5.5. Test Result**

Product	ACCESS POINT	Test Engineer	Eric Lin
Test Site	SR2	Test Date	2022/04/11

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit (dBc)	Result
802.15.4	O-QPSK	11	2405	> 20	Pass
802.15.4	O-QPSK	18	2440	> 20	Pass
802.15.4	O-QPSK	26	2480	> 20	Pass

### 802.15.4 Out-of-Band Emissions

#### Channel 11 (2405MHz)


##### 100kHz PSD Reference Level



##### Low Band Edge




##### Spurious Emission

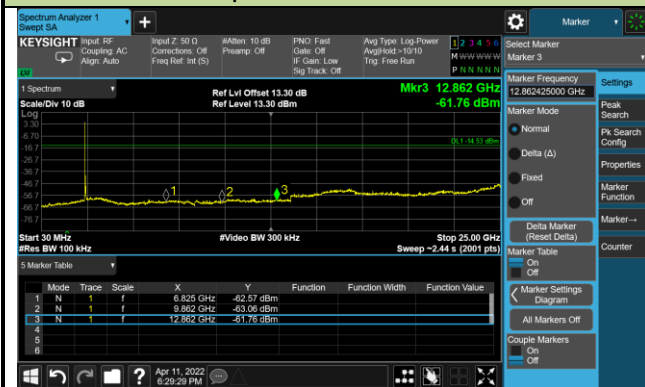


#### Channel 18 (2440MHz)

##### 100kHz PSD Reference Level

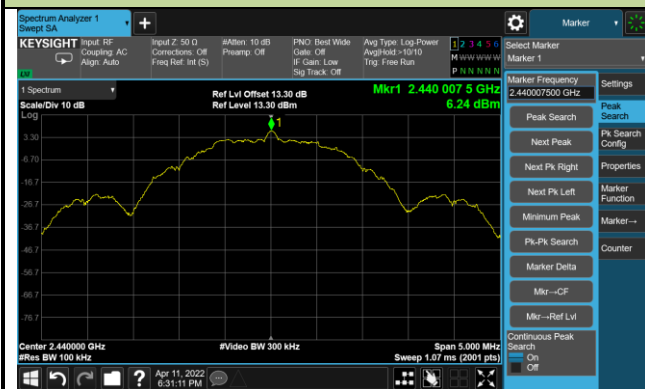

##### Spurious Emission



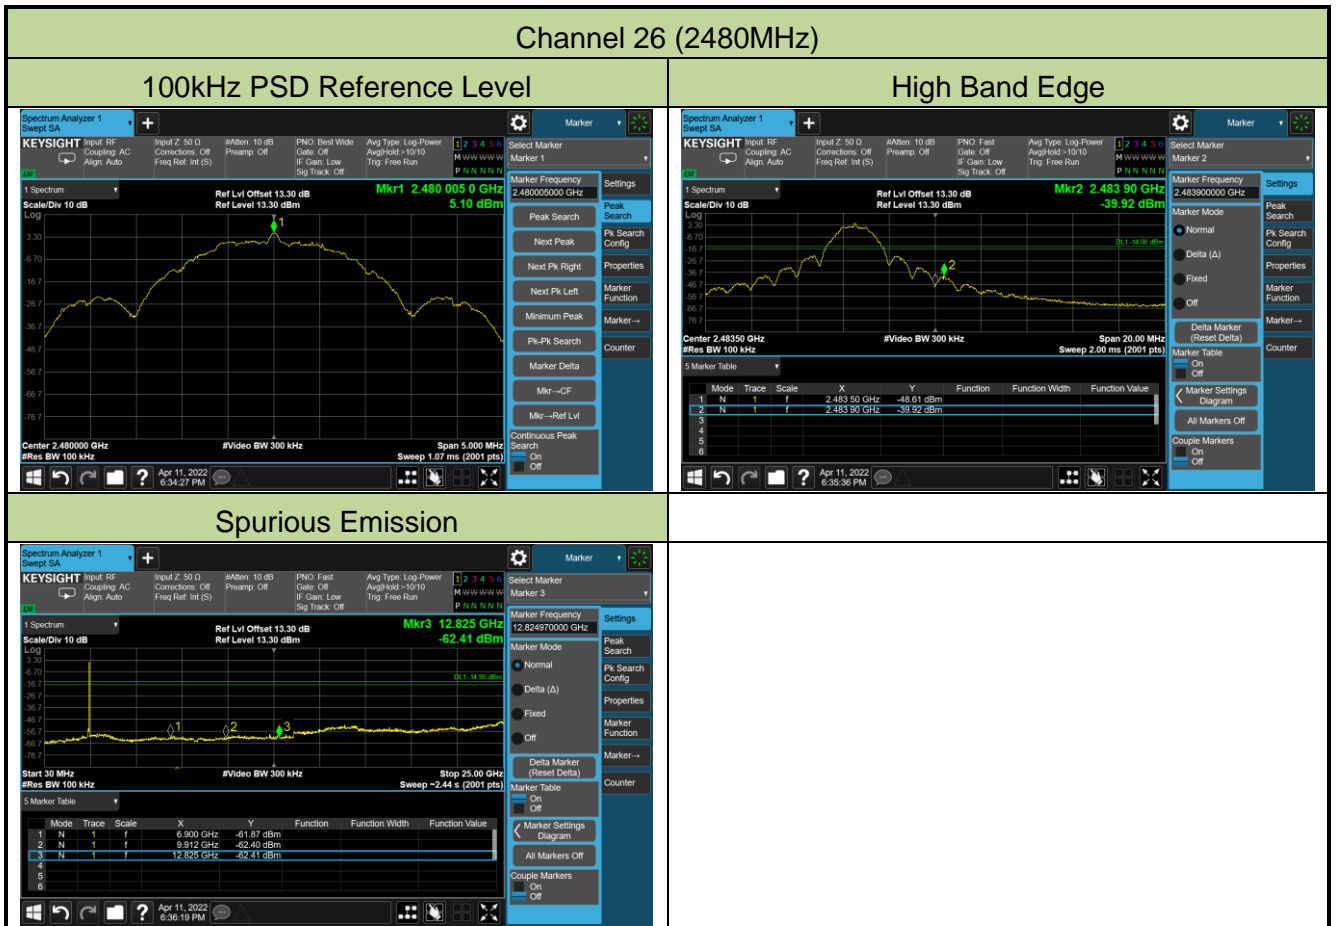

## 7.6. Radiated Spurious Emission Measurement

### 7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [ $\mu\text{V}/\text{m}$ ]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 7.6.2. Test Procedure Used

ANSI C63.10-2013 Section 6.3 (General Requirements)

ANSI C63.10-2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10-2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10-2013 Section 6.6 (Standard test method above 1GHz)

ANSI C63.10-2013 Section 11.11 & 11.12

### 7.6.3. Test Setting

**Table 1 - RBW as a function of frequency**

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz

**Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

**Peak Measurements above 1GHz**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Average Measurements above 1GHz**


1. Average Measurement Level = Peak Measurement Level -  $20 * \text{Log}(\text{Duty Cycle}) = -20$
2. Duty Cycle = 10%

### 7.6.4. Test Setup

#### Below 1GHz Test Setup:

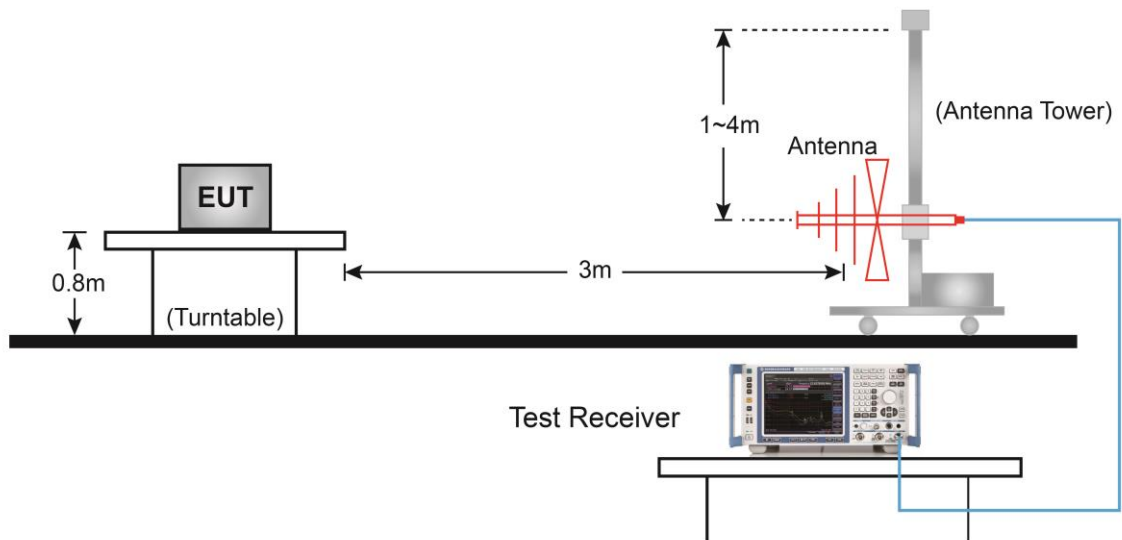


#### Above 1GHz Test Setup:

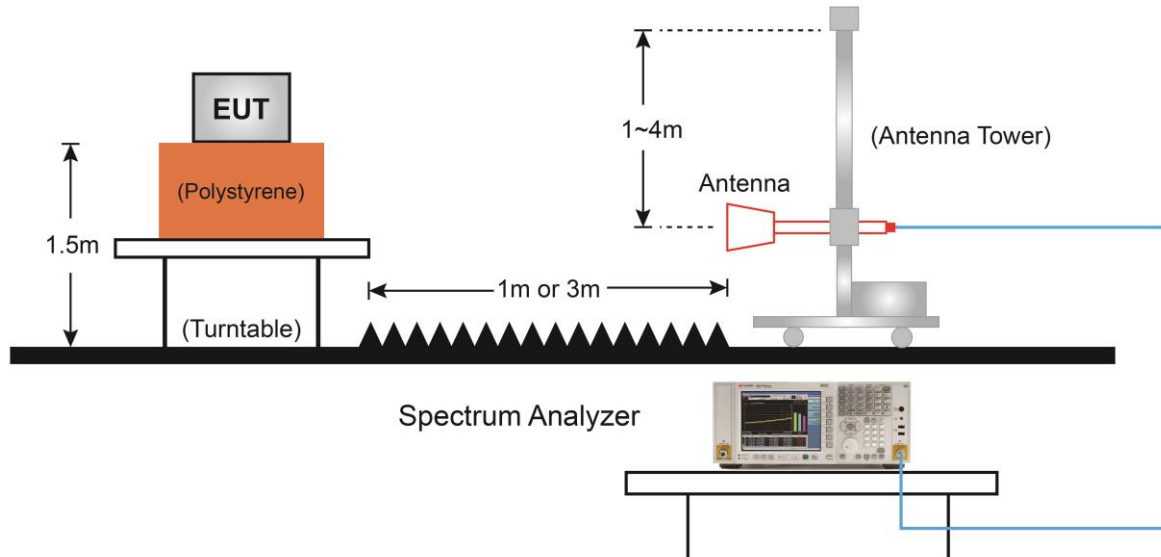



### 7.6.5. Test Result

EUT	ACCESS POINT	Date of Test	2021-12-27
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.2°C/52.3%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by Zigbee at Channel 2405MHz	Test Voltage	120V/60Hz

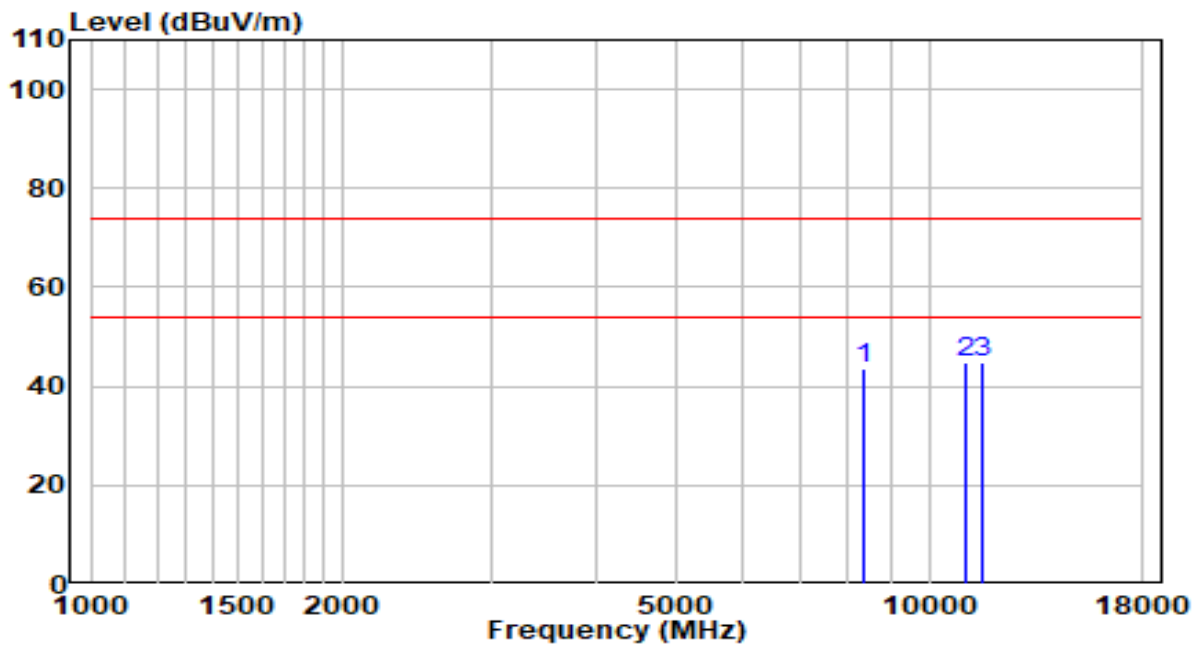


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8335.500	30.11	13.58	43.69	-30.31	74.00	Peak
2	11055.500	25.36	19.37	44.73	-29.27	74.00	Peak
3	* 11574.000	24.86	19.88	44.74	-29.26	74.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-27
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.2°C/52.3%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by Zigbee at Channel 2405MHz	Test Voltage	120V/60Hz

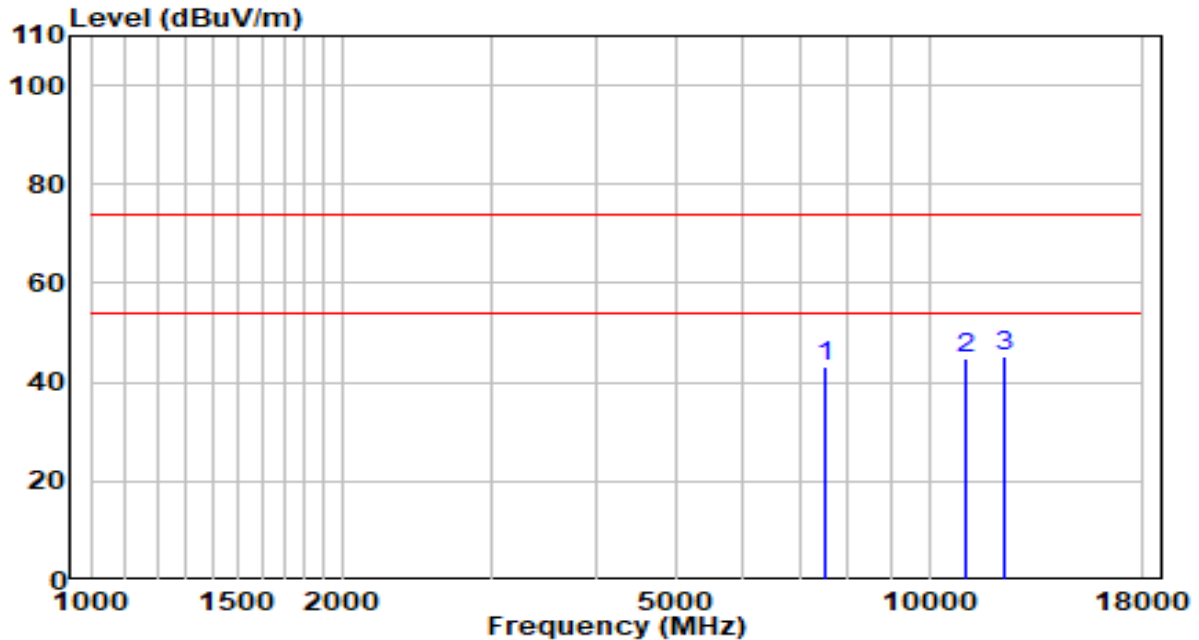


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7494.000	30.17	12.99	43.16	-30.84	74.00	Peak
2	11081.000	25.55	19.40	44.95	-29.05	74.00	Peak
3	* 12322.000	26.66	18.59	45.25	-28.75	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-27
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.2°C/52.3%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by Zigbee at Channel 2440MHz	Test Voltage	120V/60Hz

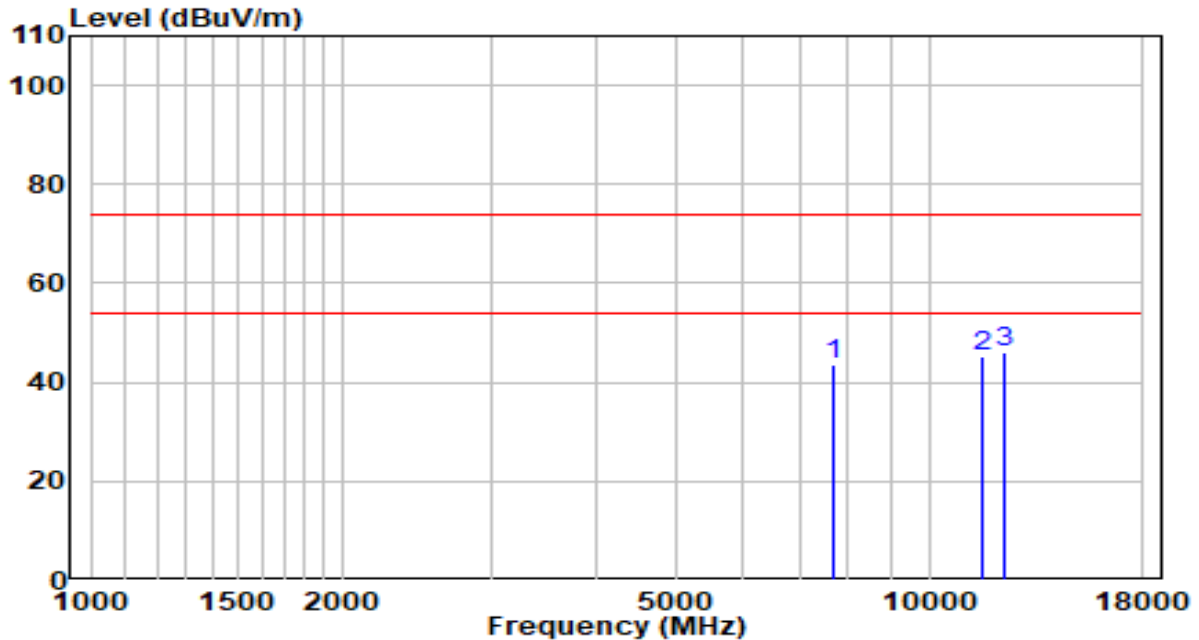


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7689.500	30.39	13.17	43.56	-30.44	74.00	Peak
2	11565.500	25.20	19.90	45.11	-28.89	74.00	Peak
3	* 12330.500	27.67	18.58	46.25	-27.75	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-27
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.2°C/52.3%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by Zigbee at Channel 2440MHz	Test Voltage	120V/60Hz

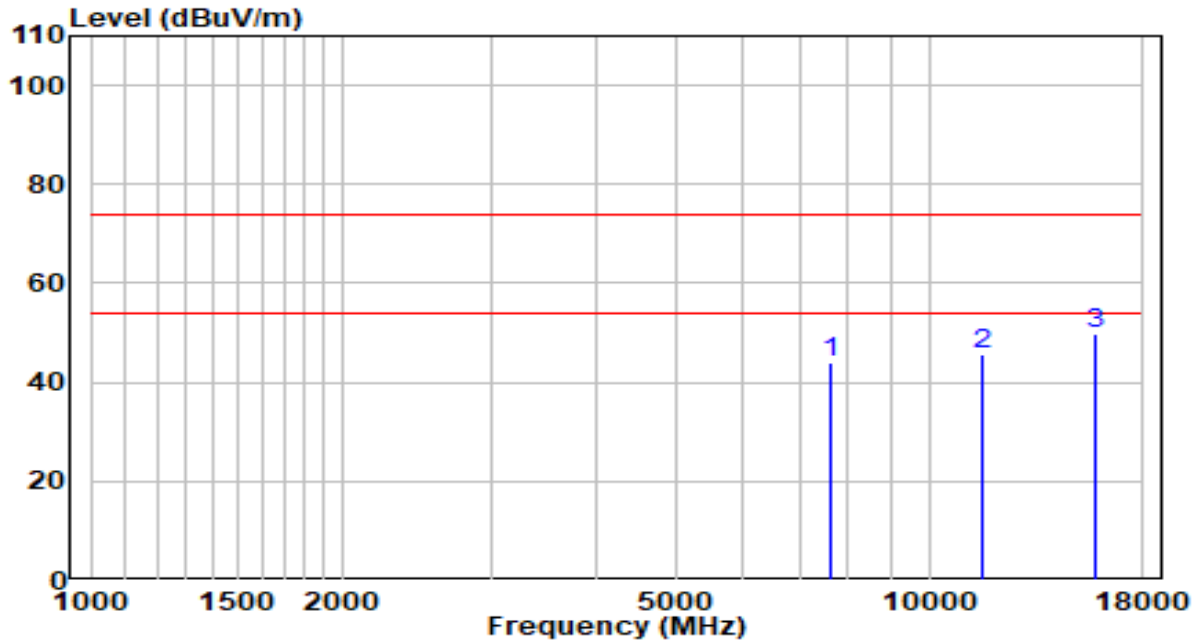


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7621.500	31.01	13.12	44.13	-29.87	74.00	Peak
2	11574.000	25.69	19.88	45.57	-28.43	74.00	Peak
3	* 15841.000	29.50	20.50	50.01	-23.99	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-27
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.2°C/52.3%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by Zigbee at Channel 2480MHz	Test Voltage	120V/60Hz

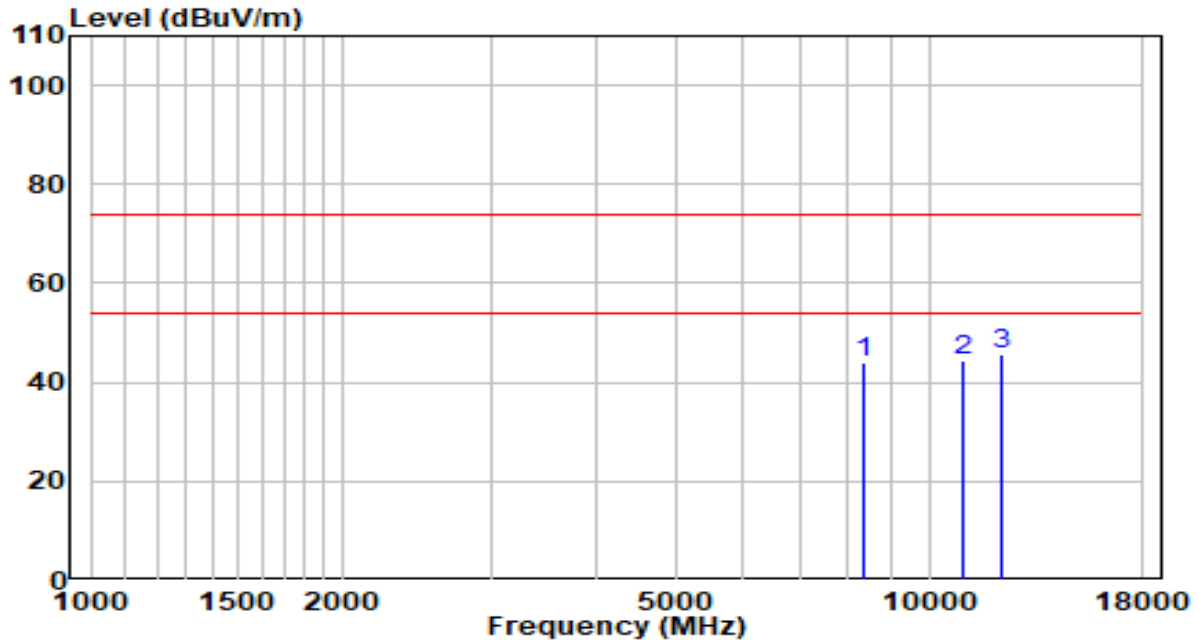


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8361.000	30.32	13.59	43.91	-30.09	74.00	Peak
2	10953.500	25.08	19.21	44.29	-29.71	74.00	Peak
3	* 12194.500	26.78	18.72	45.50	-28.50	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-27
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.2°C/52.3%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by Zigbee at Channel 2480MHz	Test Voltage	120V/60Hz

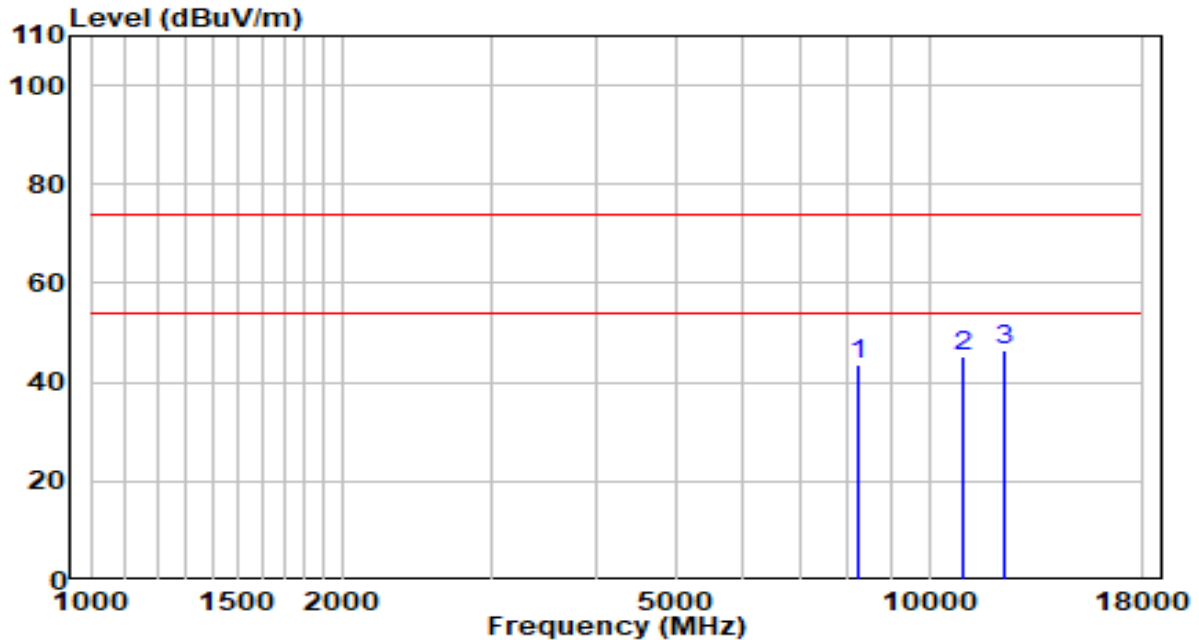


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8259.000	29.83	13.55	43.38	-30.62	74.00	Peak
2	10996.000	26.11	19.27	45.38	-28.62	74.00	Peak
3	* 12322.000	27.76	18.59	46.35	-27.65	74.00	Peak

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

### The Result of Radiated Spurious Emission between 9KHz-30MHz

EUT	ACCESS POINT	Date of Test	2022-06-07
Factor	FMZB 1519B (9KHz~30MHz)	Temp. / Humidity	24.4°C/63.7%
Polarity	Face on	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by Zigbee at Channel 2440MHz	Test Voltage	120V/60Hz

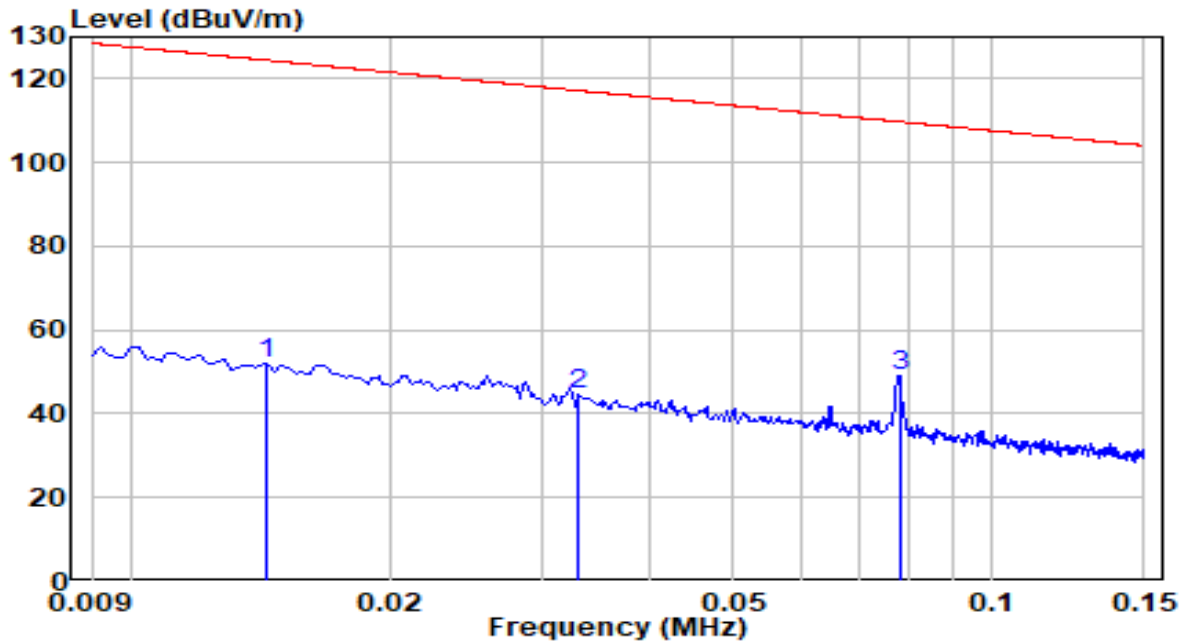


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.014	33.85	18.02	51.87	-72.60	124.47	PK
2	0.033	25.08	19.49	44.57	-72.62	117.19	PK
3	* 0.078	30.25	18.79	49.04	-60.71	109.75	PK

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-06-07
Factor	FMZB 1519B (9KHz~30MHz)	Temp. / Humidity	24.4°C/63.7%
Polarity	Face off	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by Zigbee at Channel 2440MHz	Test Voltage	120V/60Hz

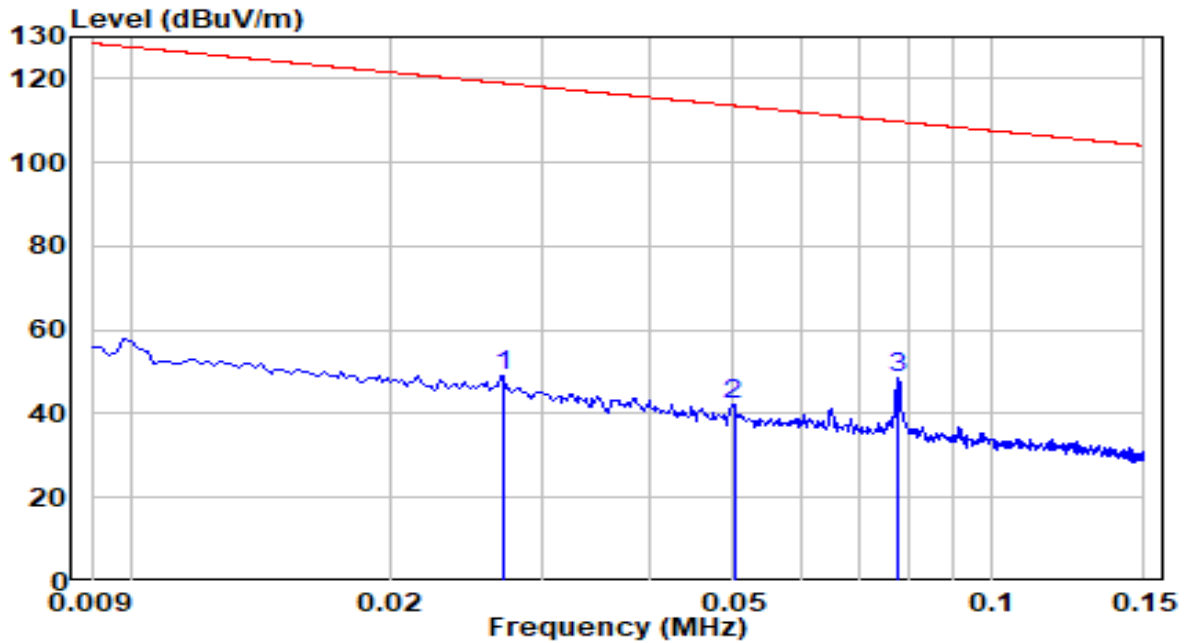


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.027	29.77	19.22	48.99	-69.98	118.97	PK
2	0.050	22.72	19.41	42.13	-71.47	113.60	PK
3	* 0.078	29.69	18.80	48.49	-61.30	109.79	PK

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2022-06-07
Factor	FMZB 1519B (9KHz~30MHz)	Temp. / Humidity	24.4°C/63.7%
Polarity	Face on	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by Zigbee at Channel 2440MHz	Test Voltage	120V/60Hz

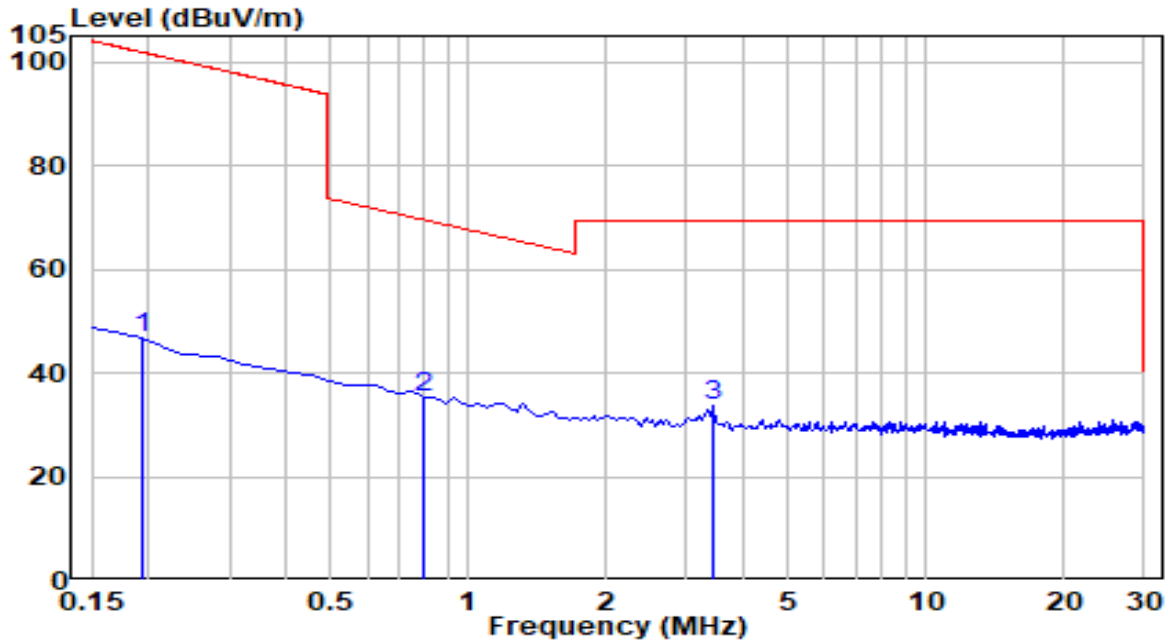


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	0.193	28.06	18.59	46.65	-55.22	101.88	PK
2	* 0.799	16.32	19.02	35.33	-34.23	69.57	PK
3	3.438	14.60	18.95	33.55	-35.95	69.50	PK

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-06-07
Factor	FMZB 1519B (9KHz~30MHz)	Temp. / Humidity	24.4°C/ 3.7%
Polarity	Face off	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by Zigbee at Channel 2440MHz	Test Voltage	120V/60Hz

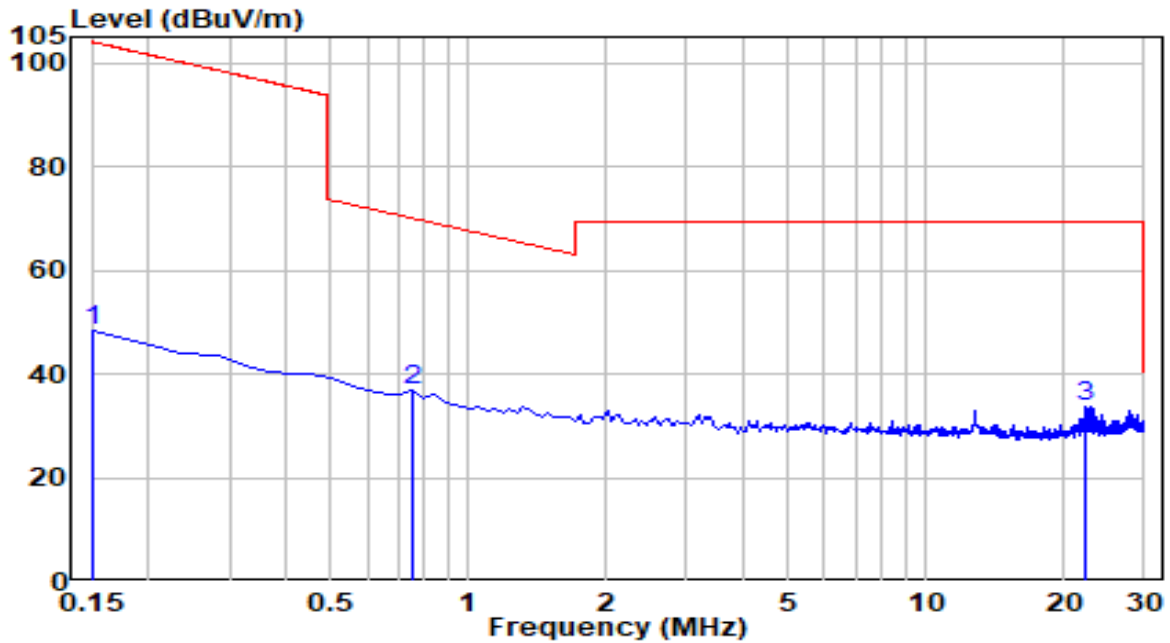


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.150	29.71	18.46	48.17	-55.91	104.08	PK
2	* 0.756	17.81	19.01	36.82	-33.23	70.05	PK
3	22.170	11.61	22.18	33.78	-35.72	69.50	PK

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

**The Result of Radiated Spurious Emission between 30MHz-1GHz:**

EUT	ACCESS POINT	Date of Test	2021-12-27
Factor	VULB 9162 (30MHz~8GHz)	Temp. / Humidity	25.2°C/52.3%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by Zigbee at Channel 2440MHz	Test Voltage	120V/60Hz

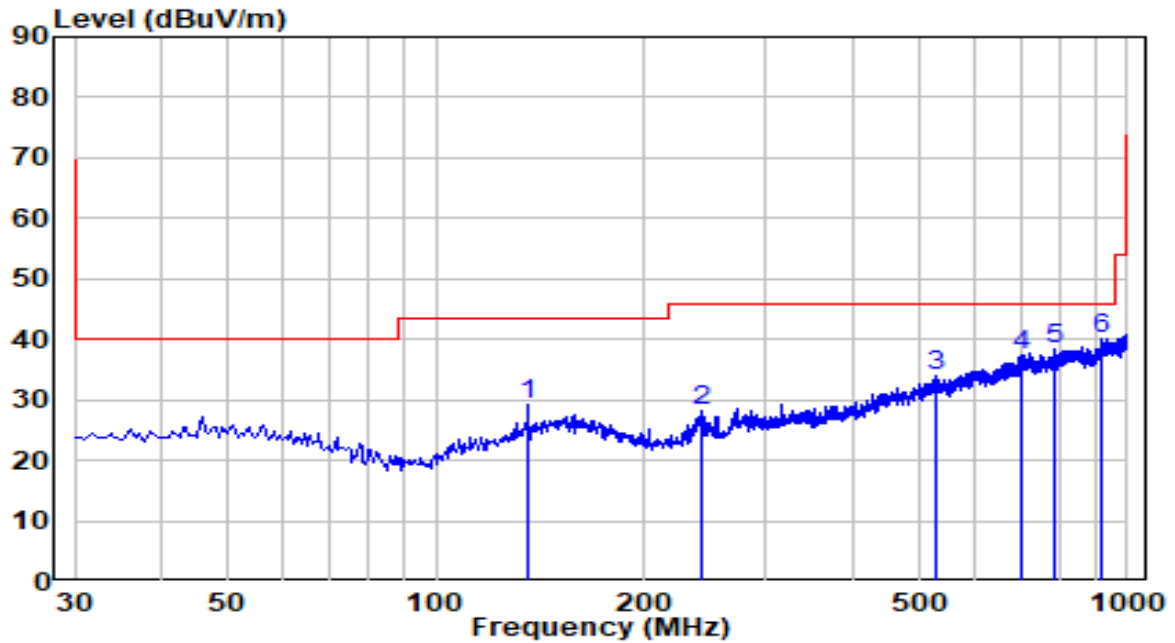


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	135.730	13.13	16.14	29.27	-14.23	43.50	Peak
2	241.460	7.91	20.25	28.16	-17.84	46.00	Peak
3	526.640	7.57	26.53	34.10	-11.90	46.00	Peak
4	702.210	8.00	29.35	37.36	-8.64	46.00	Peak
5	786.600	7.91	30.40	38.30	-7.70	46.00	Peak
6	* 914.155	8.19	31.88	40.07	-5.93	46.00	Peak

**Note:**

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

EUT	ACCESS POINT	Date of Test	2021-12-27
Factor	VULB 9162 (30MHz~8GHz)	Temp. / Humidity	25.2°C/52.3%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by Zigbee at Channel 2440MHz	Test Voltage	120V/60Hz

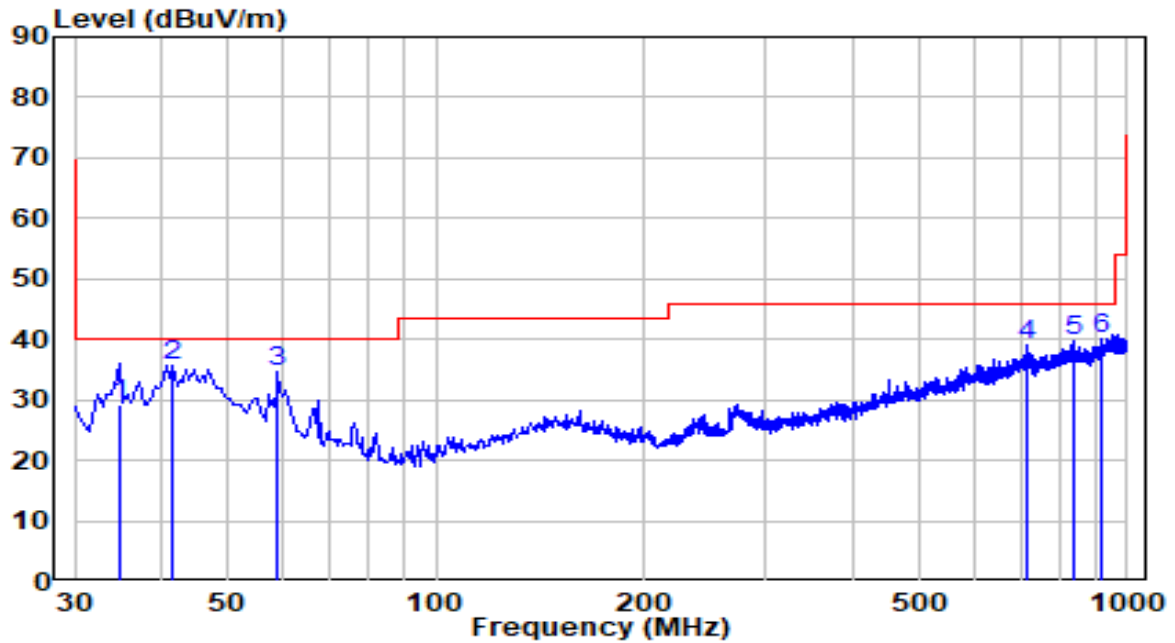


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	34.850	9.81	19.29	29.10	-10.90	40.00	QP
2	* 41.640	14.34	21.30	35.64	-4.36	40.00	Peak
3	59.100	14.23	20.38	34.61	-5.39	40.00	Peak
4	714.820	9.58	29.55	39.13	-6.87	46.00	Peak
5	835.585	8.40	31.20	39.60	-6.40	46.00	Peak
6	918.035	8.23	31.91	40.14	-5.86	46.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

**The Result of Radiated Spurious Emission above 18GHz:**

EUT	ACCESS POINT	Date of Test	2021-12-27
Factor	BBHA9170_18-40GHz	Temp. / Humidity	25.2°C/52.3%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by Zigbee at Channel 2440MHz	Test Voltage	120V/60Hz

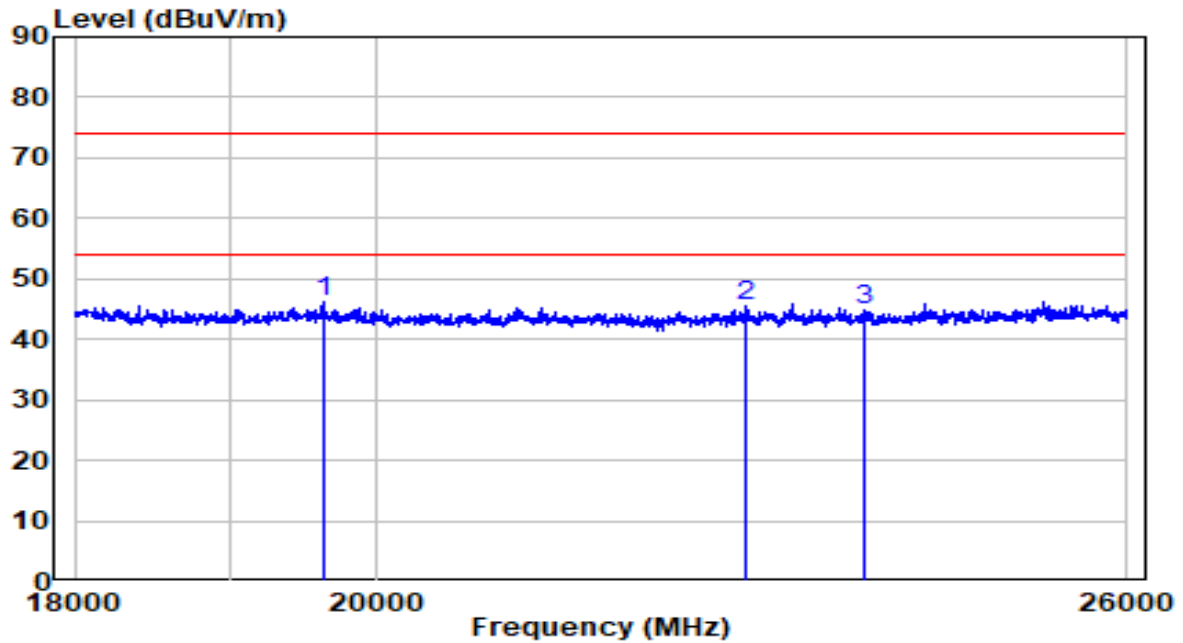


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 19640.000	42.79	3.52	46.31	-27.69	74.00	Peak
2	22756.000	41.76	3.73	45.49	-28.51	74.00	Peak
3	23728.000	41.23	3.54	44.76	-29.24	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-27
Factor	BBHA9170_18-40GHz	Temp. / Humidity	25.2°C/52.3%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by Zigbee at Channel 2440MHz	Test Voltage	120V/60Hz

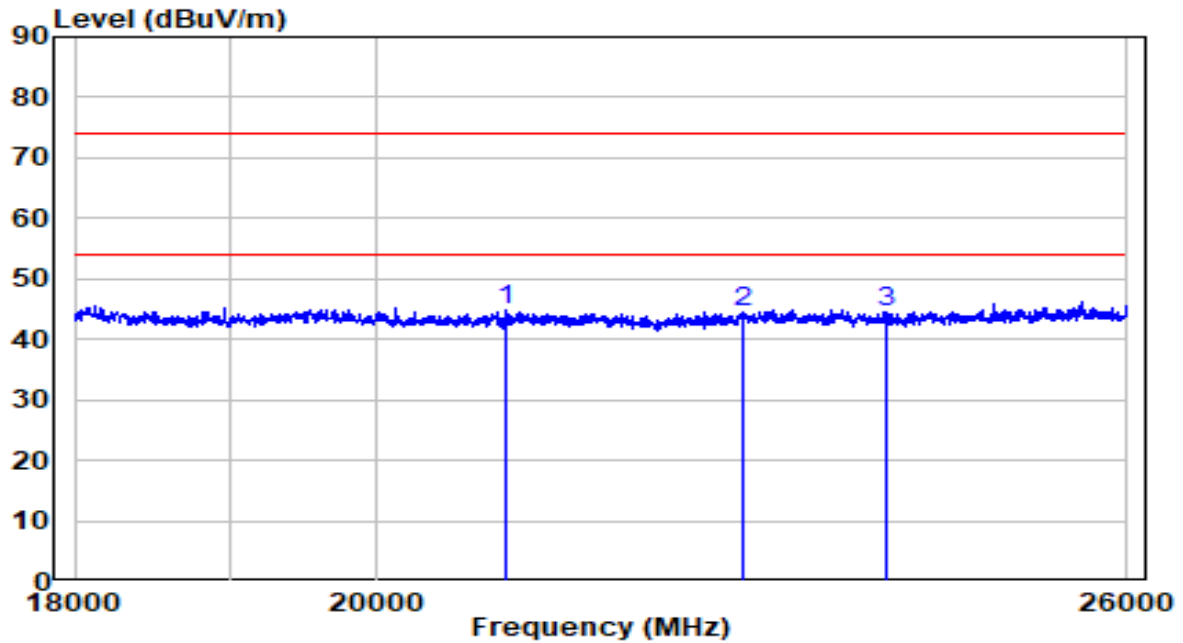

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 20936.000	41.69	3.15	44.84	-29.16	74.00	Peak
2	22724.000	40.93	3.72	44.65	-29.35	74.00	Peak
3	23896.000	40.89	3.59	44.48	-29.52	74.00	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

## 7.7. Radiated Restricted Band Edge Measurement

### 7.7.1. Test Limit

#### **For 15.205 requirement:**

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.25 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 7.7.2. Test Procedure Used

ANSI C63.10-2013 Section 6.3 (General Requirements)

ANSI C63.10-2013 Section 6.6 (Standard test method above 1GHz)

ANSI C63.10-2013 Section 11.13

### 7.7.3. Test Setting

#### Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

#### Average Field Strength Measurements

3. Average Measurement Level = Peak Measurement Level - 20 \* Log(Duty Cycle) = -20
4. Duty Cycle = 10%




### 7.7.4. Test Setup

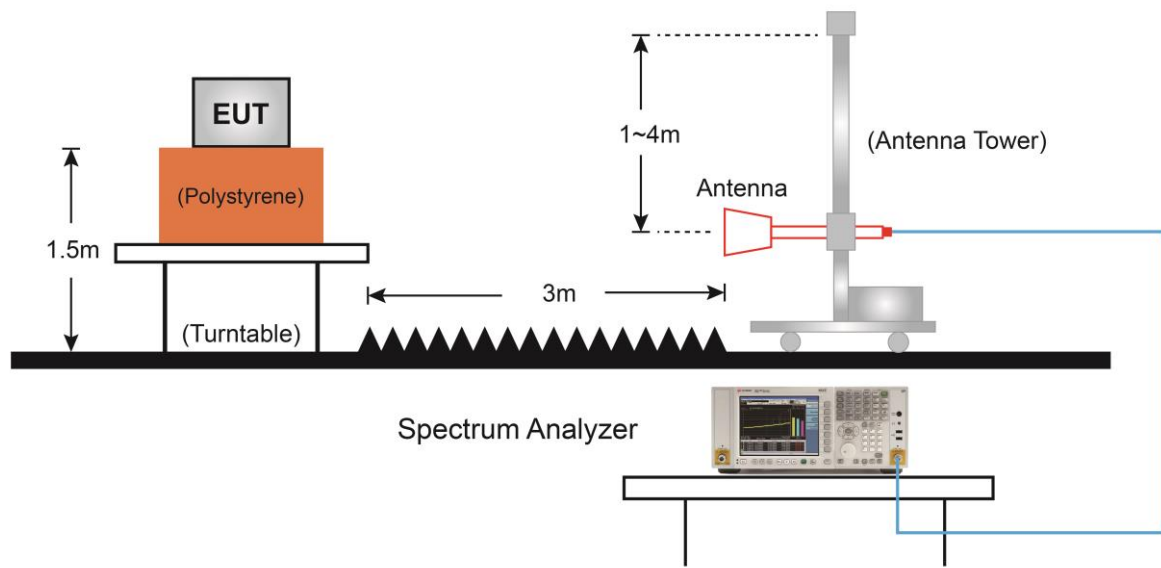

### 7.7.5. Test Result

EUT	ACCESS POINT	Date of Test	2021-12-22
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.2°C/52.3%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by Zigbee at Channel 2405MHz	Test Voltage	120V/60Hz

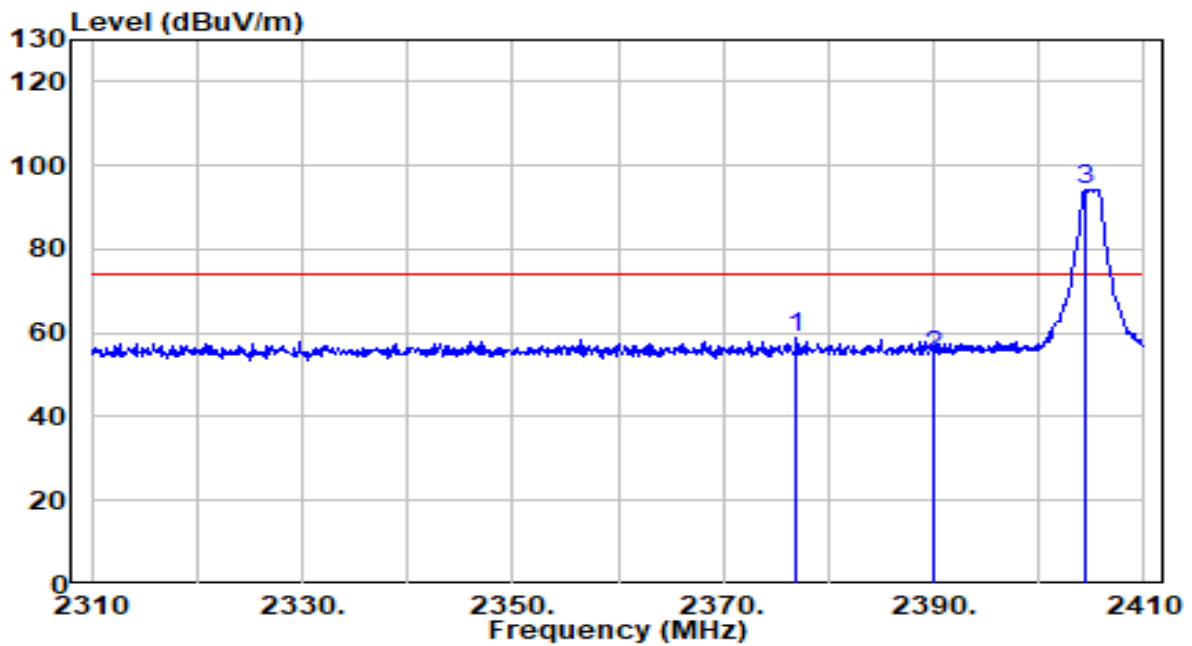


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2376.975	26.62	32.16	58.78	-15.22	74.00	Peak
1	2376.975	26.62	32.16	38.78	-15.22	54.00	Average
2	2390.000	22.43	32.22	54.65	-19.35	74.00	Peak
2	2390.000	22.43	32.22	34.65	-19.35	54.00	Average
3	* 2404.430	62.13	32.28	94.41	N/A	N/A	Peak
3	* 2404.430	62.13	32.28	74.41	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. Average Measure Level = Peak Measure Level + Duty Cycle Factor.

EUT	ACCESS POINT	Date of Test	2021-12-22
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.2°C/52.3%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by Zigbee at Channel 2405MHz	Test Voltage	120V/60Hz

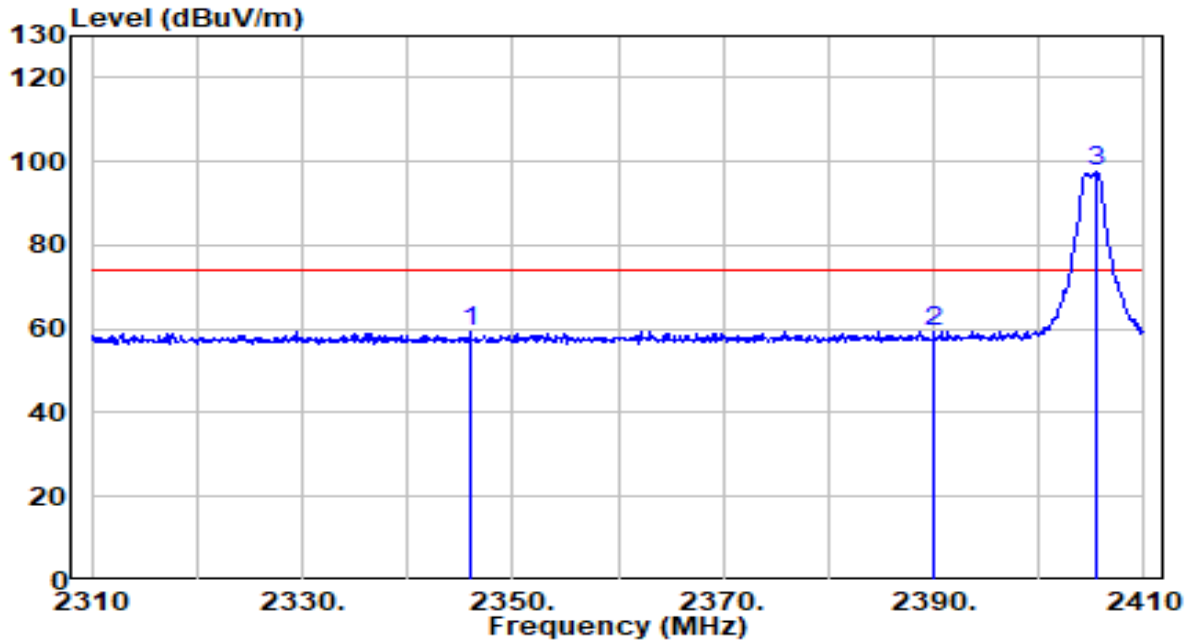


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2345.910	27.36	32.03	59.39	-14.61	74.00	Peak
1	2345.910	27.36	32.03	39.39	-14.61	54.00	Average
2	2390.000	26.99	32.22	59.21	-14.79	74.00	Peak
2	2390.000	26.99	32.22	39.21	-14.79	54.00	Average
3	* 2405.475	65.21	32.28	97.49	N/A	N/A	Peak
3	* 2405.475	65.21	32.28	77.49	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. Average Measure Level = Peak Measure Level + Duty Cycle Factor.

EUT	ACCESS POINT	Date of Test	2021-12-22
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.2°C/52.3%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by Zigbee at Channel 2480MHz	Test Voltage	120V/60Hz

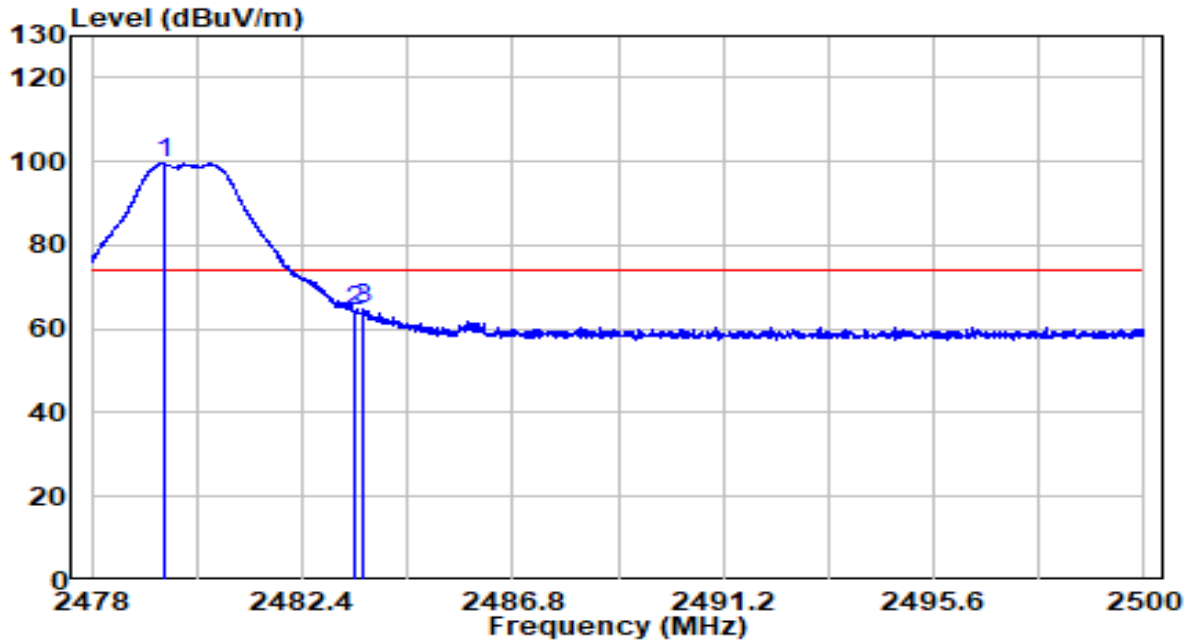


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)	
1	*	2479.518	66.80	32.59	99.39	N/A	N/A	Peak
1	*	2479.518	66.80	32.59	79.39	N/A	N/A	Average
2		2483.500	31.72	32.61	64.33	-9.67	74.00	Peak
2		2483.500	31.72	32.61	44.33	-9.67	54.00	Average
3		2483.665	32.31	32.61	64.92	-9.08	74.00	Peak
3		2483.665	32.31	32.61	44.92	-9.08	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. Average Measure Level = Peak Measure Level + Duty Cycle Factor.

EUT	ACCESS POINT	Date of Test	2021-12-22
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.2°C/52.3%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by Zigbee at Channel 2480MHz	Test Voltage	120V/60Hz

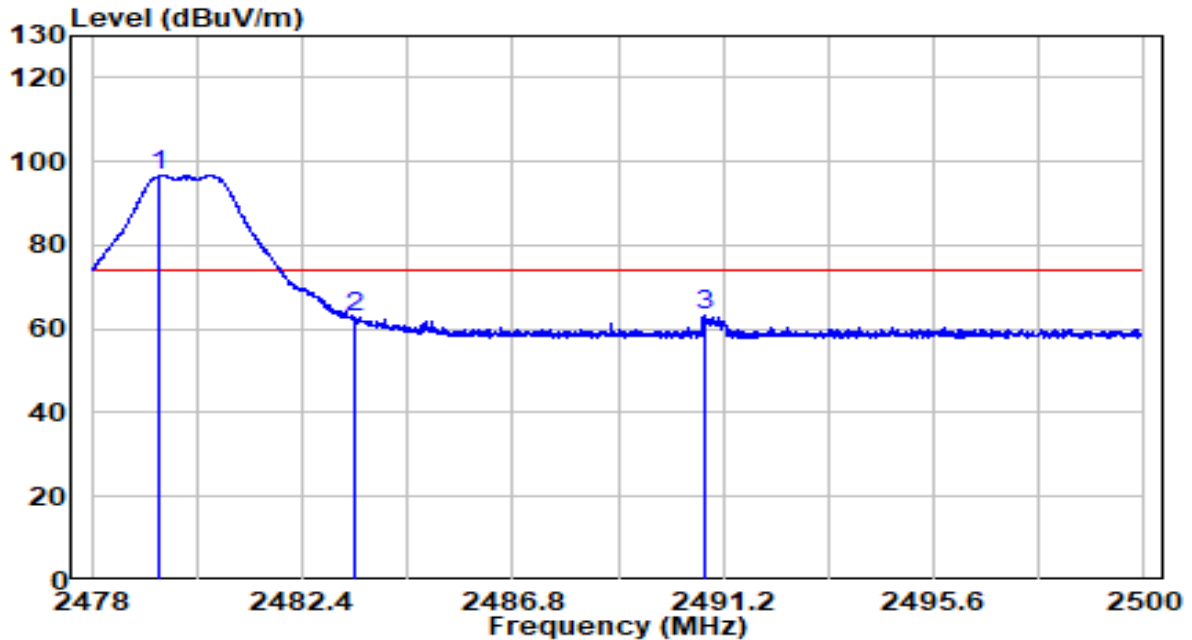

No		Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	2479.430	64.05	32.59	96.64	N/A	N/A	Peak
1	*	2479.430	64.05	32.59	76.64	N/A	N/A	Average
2		2483.500	29.96	32.61	62.57	-11.43	74.00	Peak
2		2483.500	29.96	32.61	42.57	-11.43	54.00	Average
3		2490.793	30.45	32.64	63.09	-10.91	74.00	Peak
3		2490.793	30.45	32.64	43.09	-10.91	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. Average Measure Level = Peak Measure Level + Duty Cycle Factor.

## 7.8. AC Conducted Emissions Measurement


### 7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.8.2. Test Setup

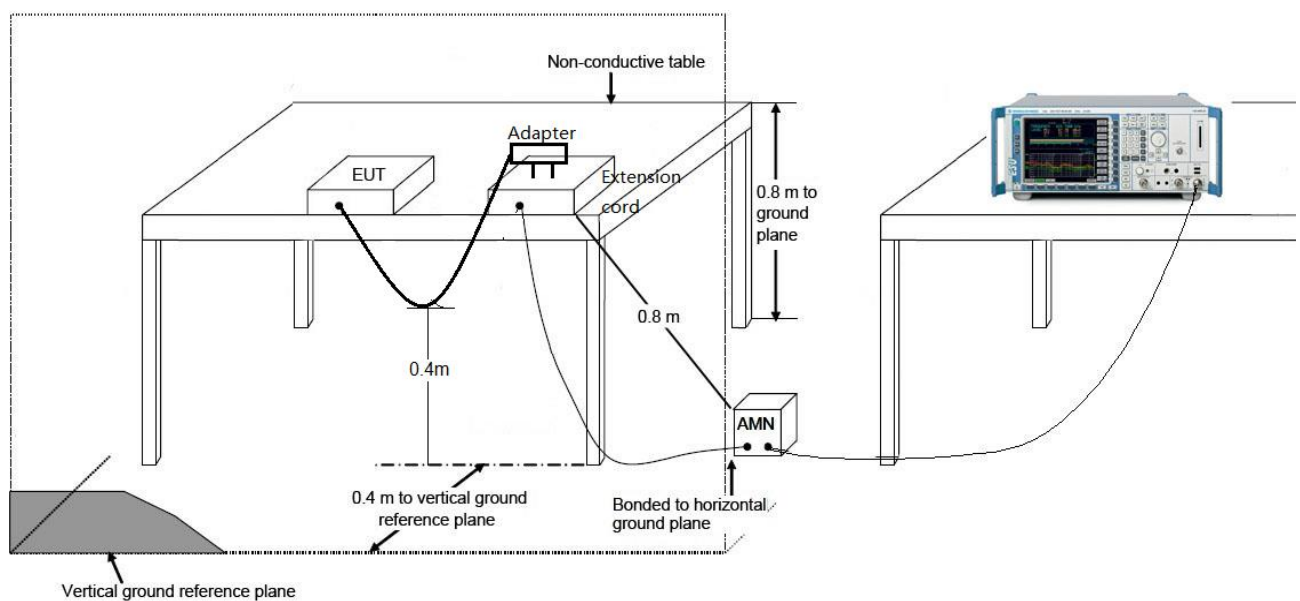

### 7.8.3. Test Result

EUT	ACCESS POINT	Date of Test	2021-10-23
Factor	CE_ENV216-L1 (Filter OFF)	Temp. / Humidity	20.8°C /47.5%
Polarity	Line1	Site / Test Engineer	SR2 / Eric Lin
Test Mode	Transmit by Zigbee at channel 2440MHz	Test Voltage	120V/60Hz

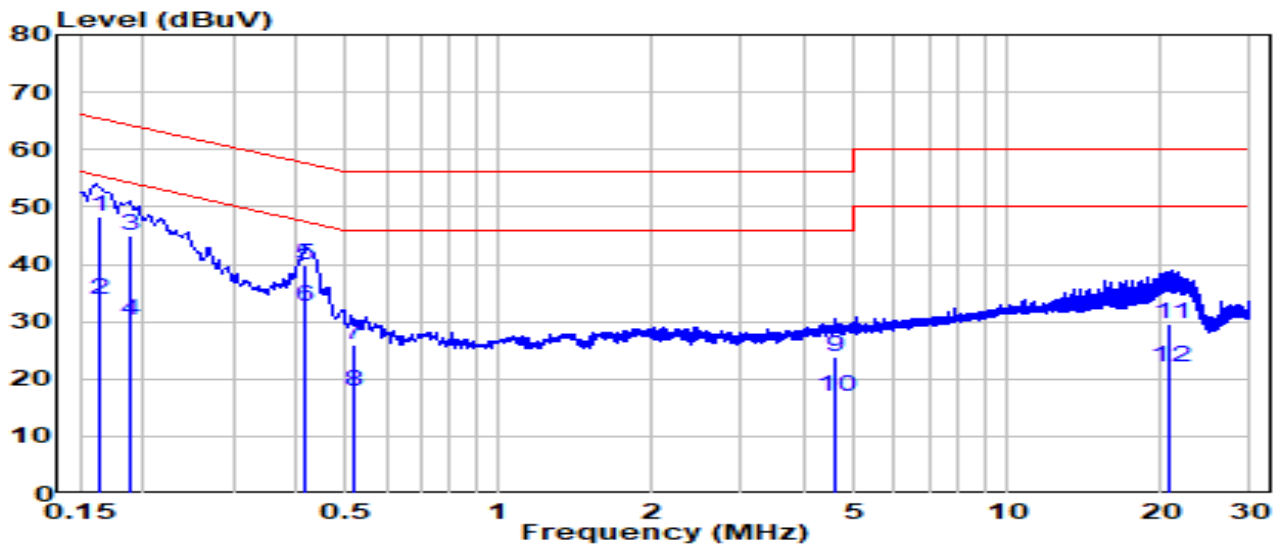


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)	
1	0.163	38.81	9.61	48.42	-16.89	65.31	QP	
2	0.163	24.31	9.61	33.92	-21.39	55.31	Average	
3	0.188	35.41	9.61	45.02	-19.10	64.12	QP	
4	0.188	20.71	9.61	30.32	-23.80	54.12	Average	
5	0.418	30.29	9.63	39.92	-17.57	57.49	QP	
6	*	0.418	22.99	9.63	32.62	-14.87	47.49	Average
7	0.517	16.29	9.63	25.92	-30.08	56.00	QP	
8	0.517	8.29	9.63	17.92	-28.08	46.00	Average	
9	4.587	14.11	9.73	23.84	-32.16	56.00	QP	
10	4.587	7.11	9.73	16.84	-29.16	46.00	Average	
11	20.890	19.74	9.98	29.73	-30.27	60.00	QP	
12	20.890	12.14	9.98	22.13	-27.87	50.00	Average	

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-23
Factor	CE_ENV216-N (Filter OFF)	Temp. / Humidity	20.8°C /47.5%
Polarity	Neutral	Site / Test Engineer	SR2 / Eric Lin
Test Mode	Transmit by Zigbee at channel 2440MHz	Test Voltage	120V/60Hz

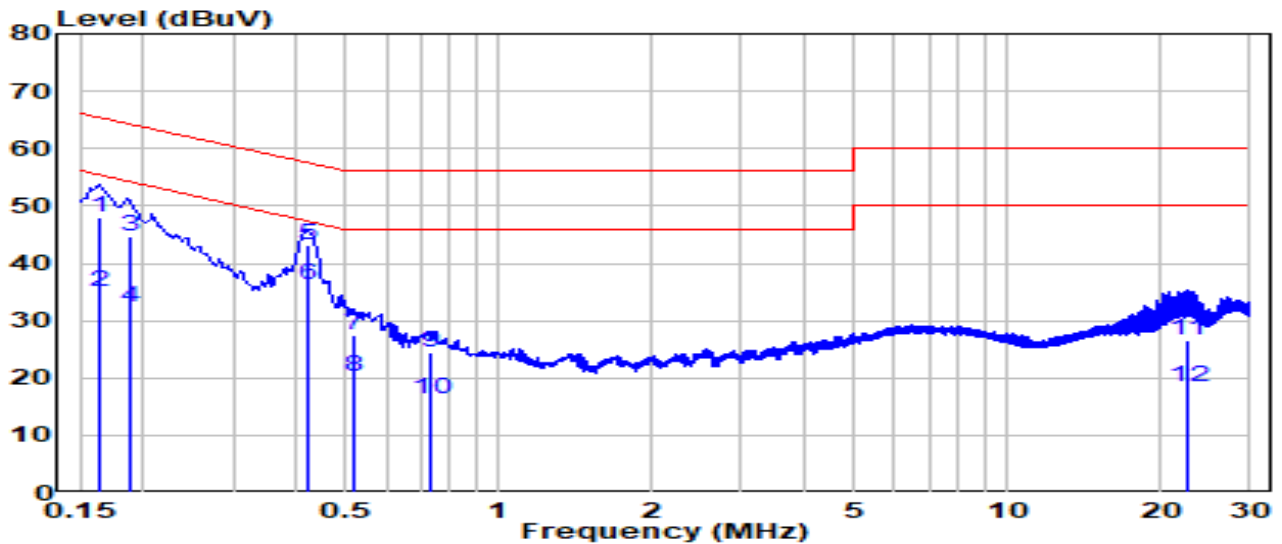

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)	
1	0.164	38.39	9.62	48.01	-17.25	65.26	QP	
2	0.164	25.39	9.62	35.01	-20.25	55.26	Average	
3	0.188	35.10	9.61	44.71	-19.41	64.12	QP	
4	0.188	22.60	9.61	32.21	-21.91	54.12	Average	
5	0.422	33.58	9.63	43.21	-14.20	57.41	QP	
6	*	0.422	26.48	9.63	36.11	-11.30	47.41	Average
7	0.521	17.98	9.63	27.61	-28.39	56.00	QP	
8	0.521	10.48	9.63	20.11	-25.89	46.00	Average	
9	0.730	14.76	9.65	24.41	-31.59	56.00	QP	
10	0.730	6.56	9.65	16.21	-29.79	46.00	Average	
11	22.500	16.57	10.08	26.64	-33.36	60.00	QP	
12	22.500	8.37	10.08	18.44	-31.56	50.00	Average	

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).



## **Appendix A - Test Setup Photograph**

Refer to "AP-615\_Test setup photo" file.

## Appendix B - EUT Photograph

Refer to "AP-615\_EUT photo" file.

\_\_\_\_\_ The End \_\_\_\_\_