


EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	120V/60Hz

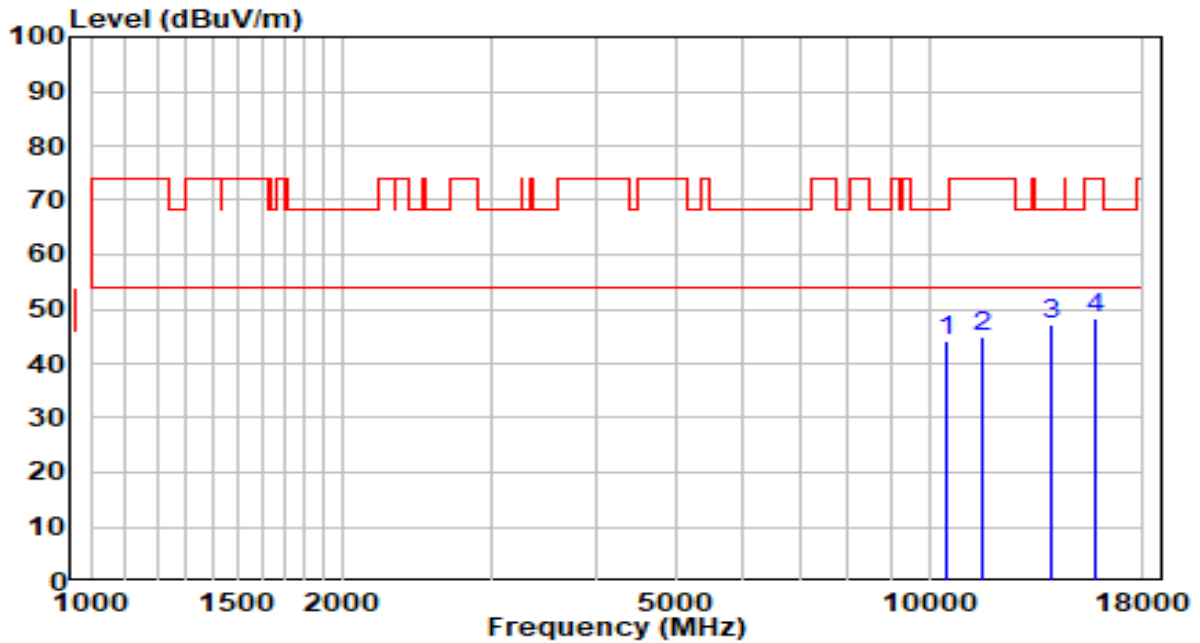


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10503.000	25.41	18.57	43.98	-24.22	68.20	Peak
2	11574.000	24.91	19.88	44.79	-29.21	74.00	Peak
3	* 13937.000	24.80	22.35	47.15	-21.05	68.20	Peak
4	15824.000	27.79	20.55	48.34	-25.66	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	120V/60Hz

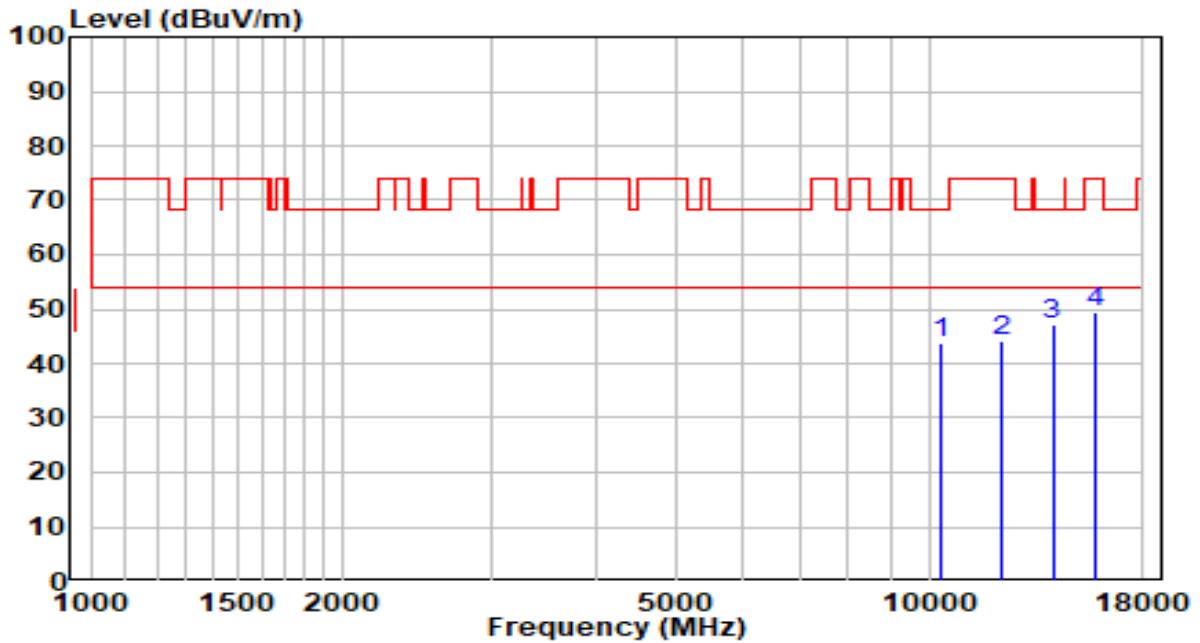


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10367.000	25.67	18.04	43.71	-24.49	68.20	Peak
2	12194.500	25.61	18.72	44.33	-29.67	74.00	Peak
3	* 14039.000	24.60	22.42	47.03	-21.17	68.20	Peak
4	15756.000	28.66	20.72	49.38	-24.62	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5710MHz	Test Voltage	120V/60Hz

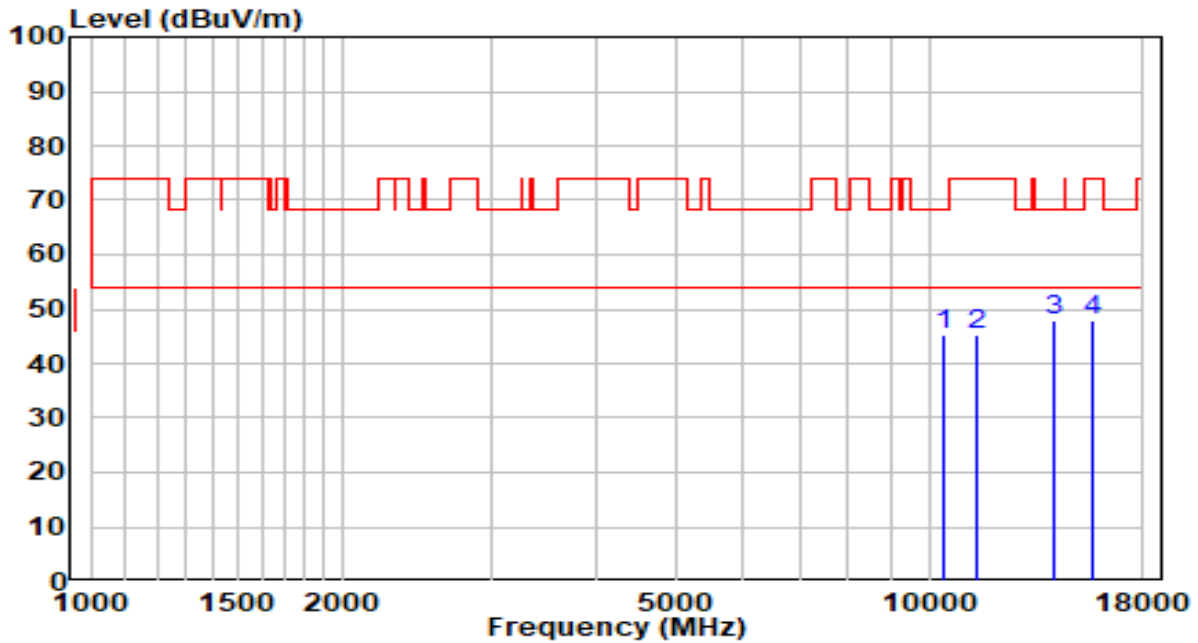


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10418.000	27.16	18.24	45.40	-22.80	68.20	Peak
2	11421.000	25.38	19.93	45.31	-28.69	74.00	Peak
3	* 14047.500	25.42	22.42	47.84	-20.36	68.20	Peak
4	15654.000	26.84	20.97	47.81	-26.19	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5710MHz	Test Voltage	120V/60Hz

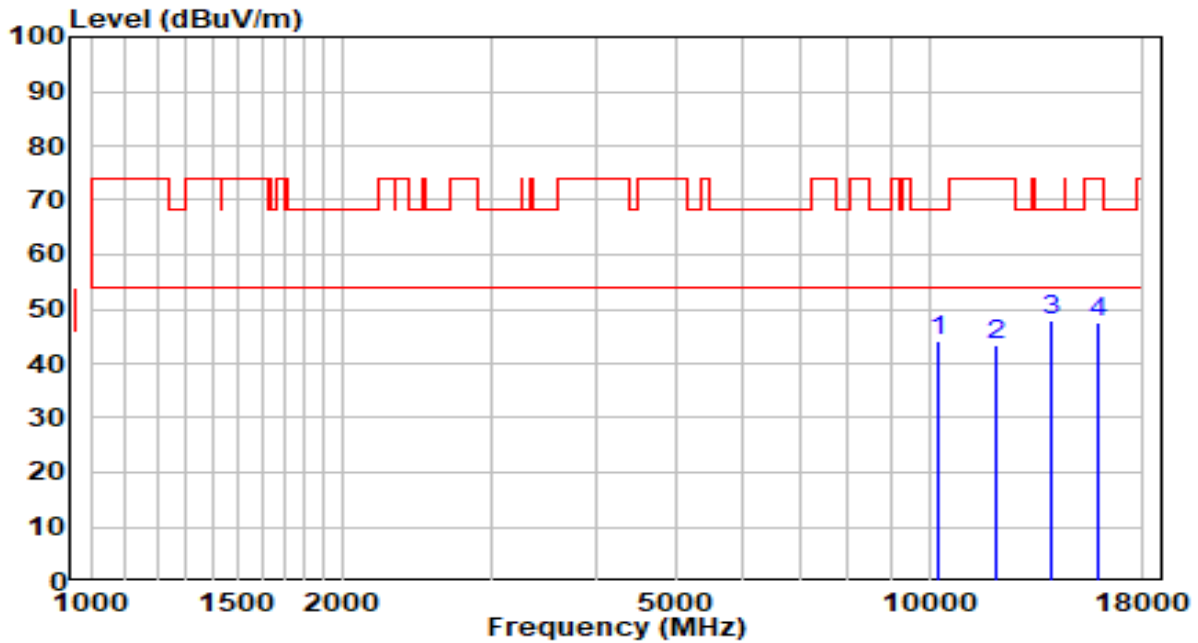


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10239.500	26.54	17.52	44.06	-24.14	68.20	Peak
2	12024.500	24.68	18.89	43.57	-30.43	74.00	Peak
3	* 13962.500	25.44	22.38	47.82	-20.38	68.20	Peak
4	15960.000	27.52	20.21	47.73	-26.27	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	120V/60Hz

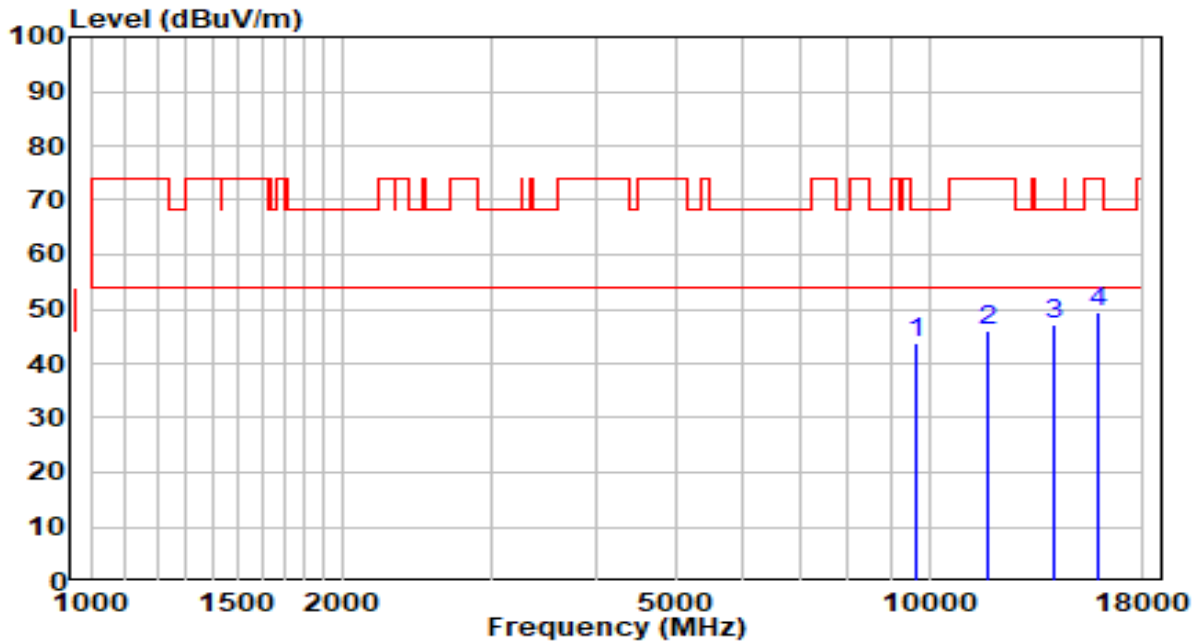


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9644.500	27.93	15.96	43.89	-24.31	68.20	Peak
2	11786.500	26.67	19.40	46.07	-27.93	74.00	Peak
3	* 14090.000	24.68	22.43	47.11	-21.09	68.20	Peak
4	15849.500	28.97	20.48	49.45	-24.55	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	120V/60Hz

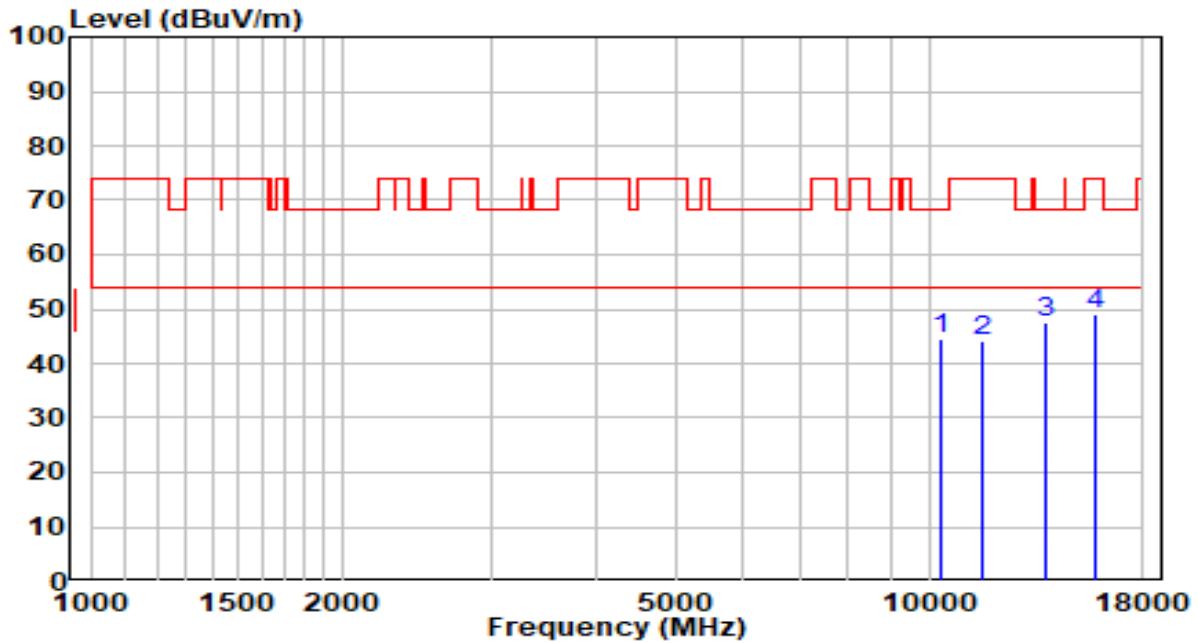


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10307.500	26.83	17.80	44.62	-23.58	68.20	Peak
2	11591.000	24.44	19.84	44.28	-29.72	74.00	Peak
3	* 13741.500	25.48	22.13	47.61	-20.59	68.20	Peak
4	15747.500	28.15	20.74	48.89	-25.11	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	120V/60Hz

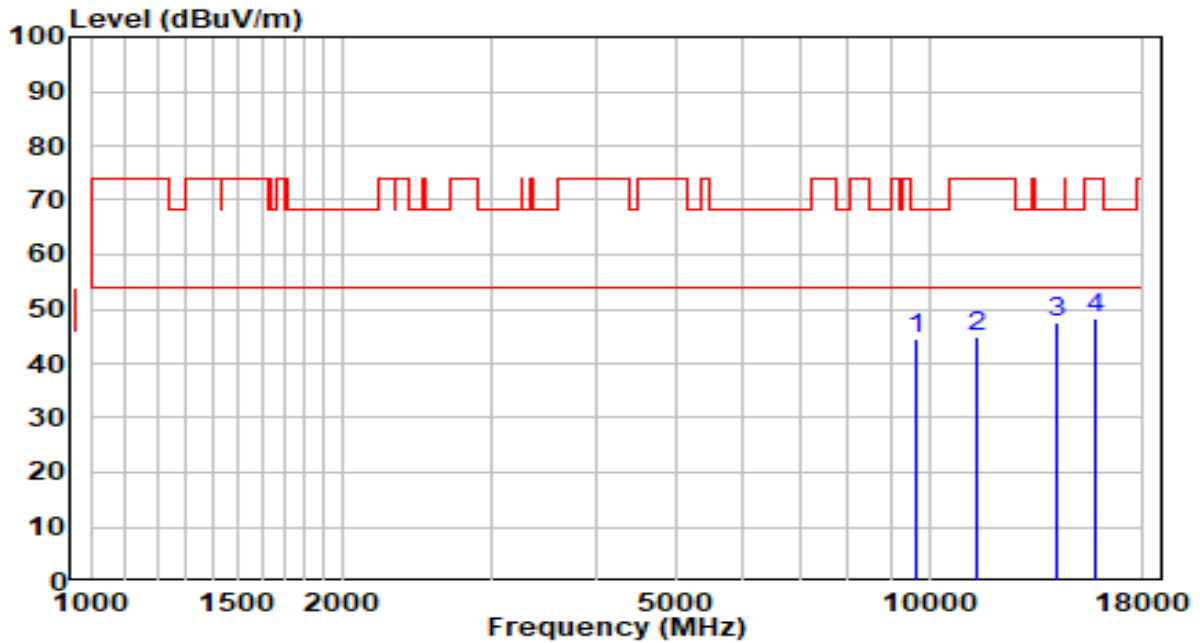


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9636.000	28.42	15.95	44.37	-23.83	68.20	Peak
2	11429.500	24.80	19.94	44.74	-29.26	74.00	Peak
3	* 14149.500	25.20	22.43	47.63	-20.57	68.20	Peak
4	15832.500	27.90	20.53	48.43	-25.57	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	120V/60Hz

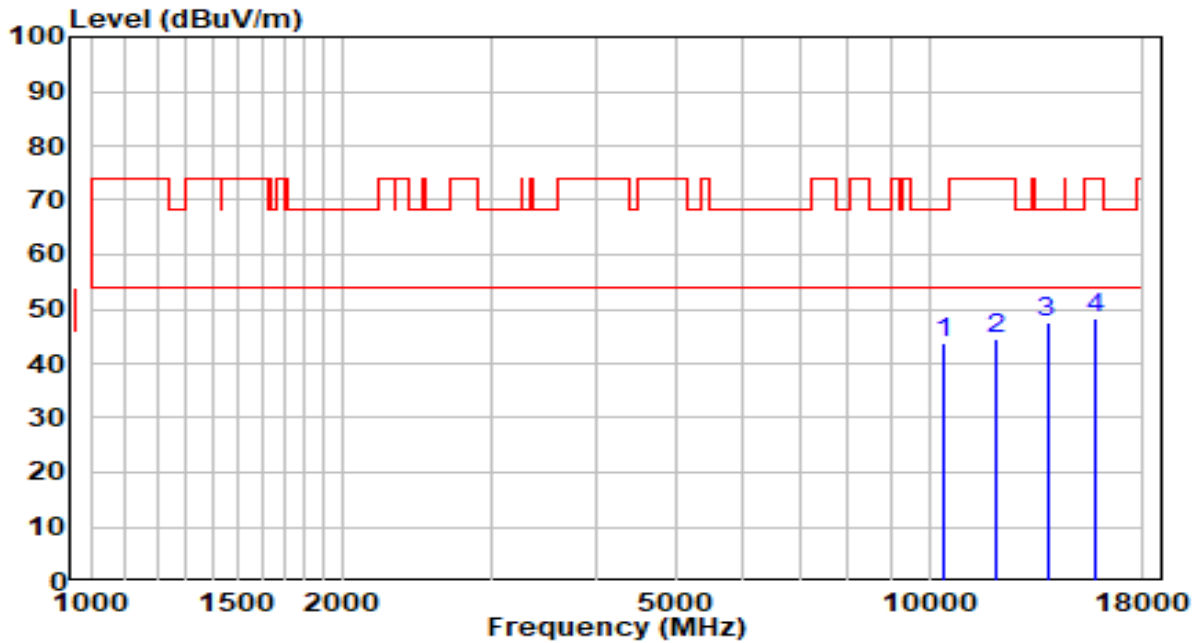


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10401.000	25.60	18.17	43.78	-24.42	68.20	Peak
2	11990.500	25.69	18.94	44.63	-29.37	74.00	Peak
3	* 13826.500	25.36	22.22	47.58	-20.62	68.20	Peak
4	15832.500	27.86	20.53	48.39	-25.61	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	120V/60Hz

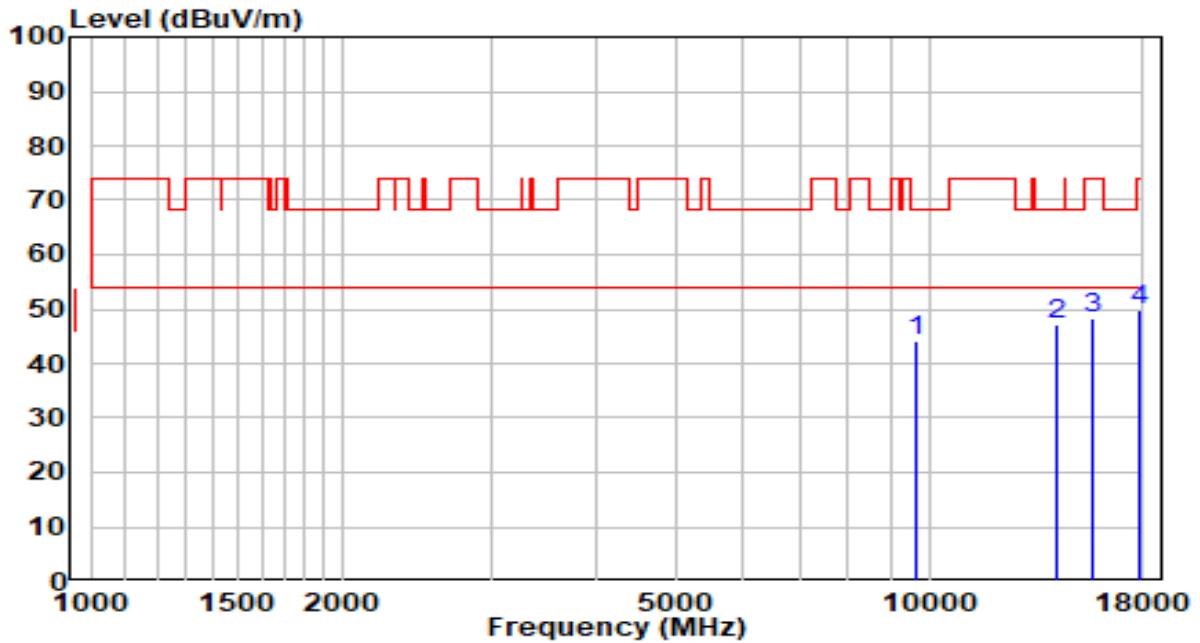


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9636.000	28.31	15.95	44.26	-23.94	68.20	Peak
2	* 14234.500	24.70	22.44	47.14	-21.06	68.20	Peak
3	15722.000	27.64	20.80	48.44	-25.56	74.00	Peak
4	17830.000	18.79	30.96	49.75	-24.25	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	120V/60Hz

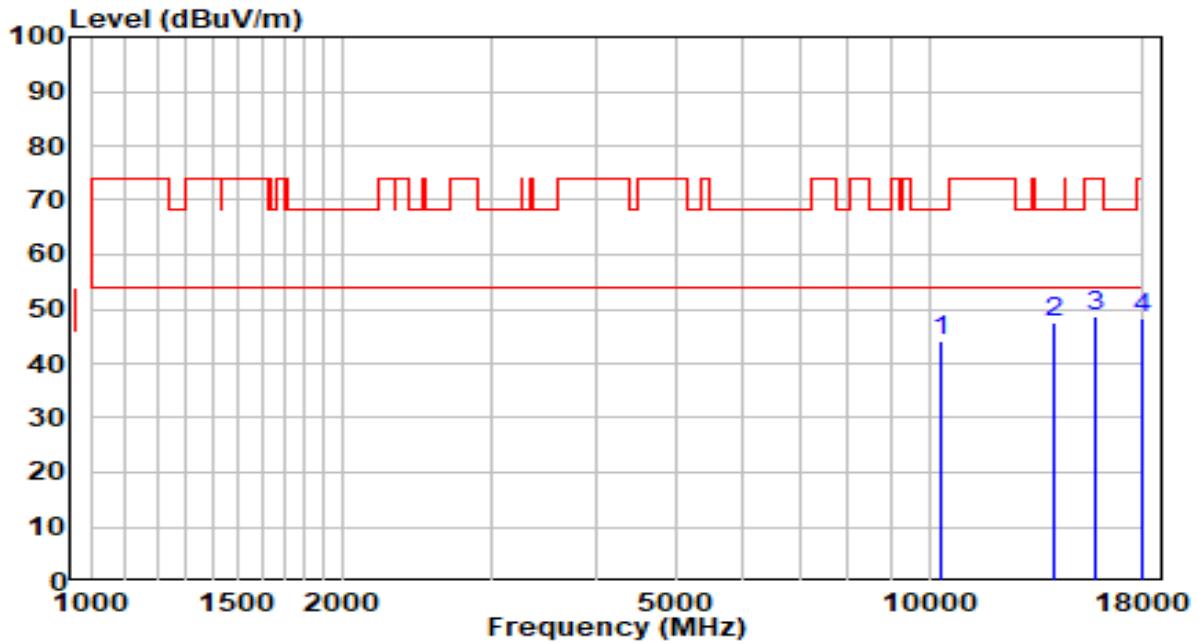


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10299.000	26.46	17.76	44.22	-23.98	68.20	Peak
2	* 14107.000	25.17	22.43	47.60	-20.60	68.20	Peak
3	15730.500	27.97	20.78	48.75	-25.25	74.00	Peak
4	17915.000	16.45	31.77	48.22	-25.78	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	120V/60Hz

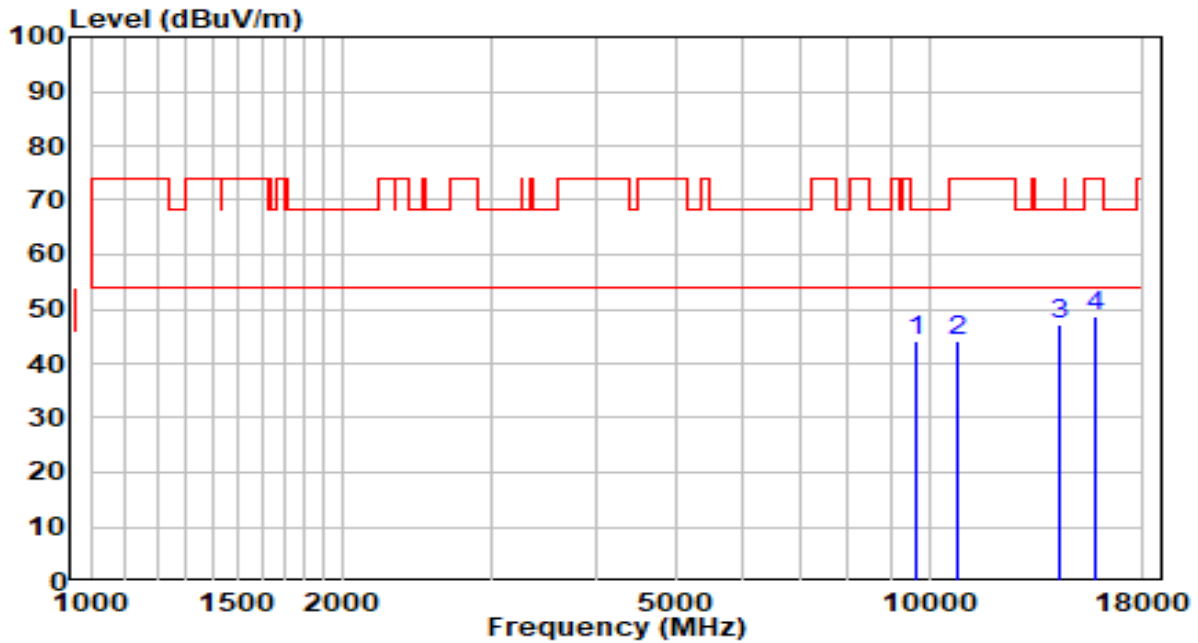


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9627.500	28.33	15.93	44.26	-23.94	68.20	Peak
2	10809.000	25.28	19.01	44.29	-29.71	74.00	Peak
3	* 14260.000	24.58	22.44	47.02	-21.18	68.20	Peak
4	15747.500	27.81	20.74	48.55	-25.45	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	120V/60Hz

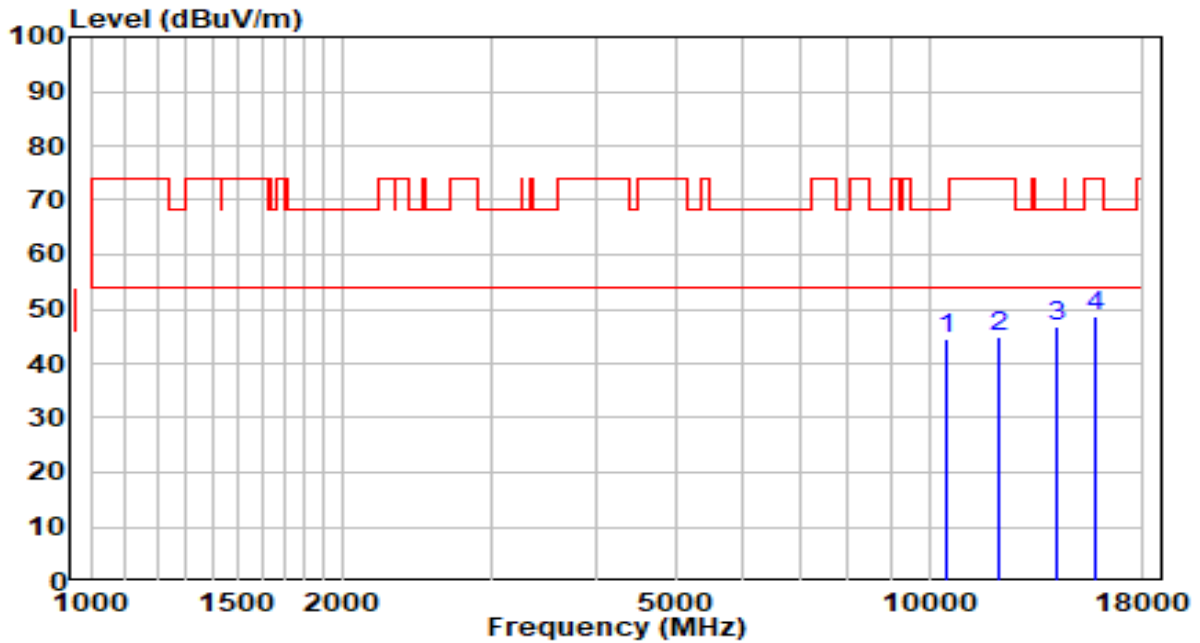


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10503.000	25.86	18.57	44.43	-23.77	68.20	Peak
2	12067.000	26.14	18.85	44.99	-29.01	74.00	Peak
3	* 14217.500	24.37	22.44	46.80	-21.40	68.20	Peak
4	15730.500	28.08	20.78	48.86	-25.14	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	120V/60Hz

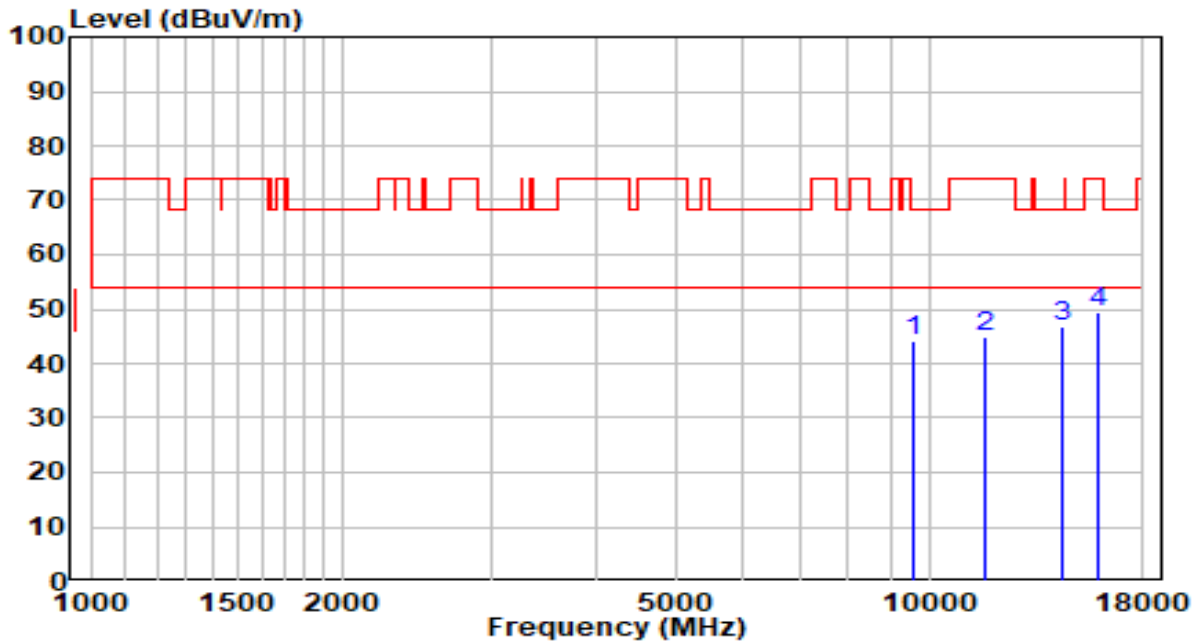


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9559.500	28.48	15.82	44.30	-23.90	68.20	Peak
2	11684.500	25.18	19.63	44.81	-29.19	74.00	Peak
3	* 14387.500	24.51	22.45	46.95	-21.25	68.20	Peak
4	15951.500	29.02	20.23	49.25	-24.75	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	120V/60Hz

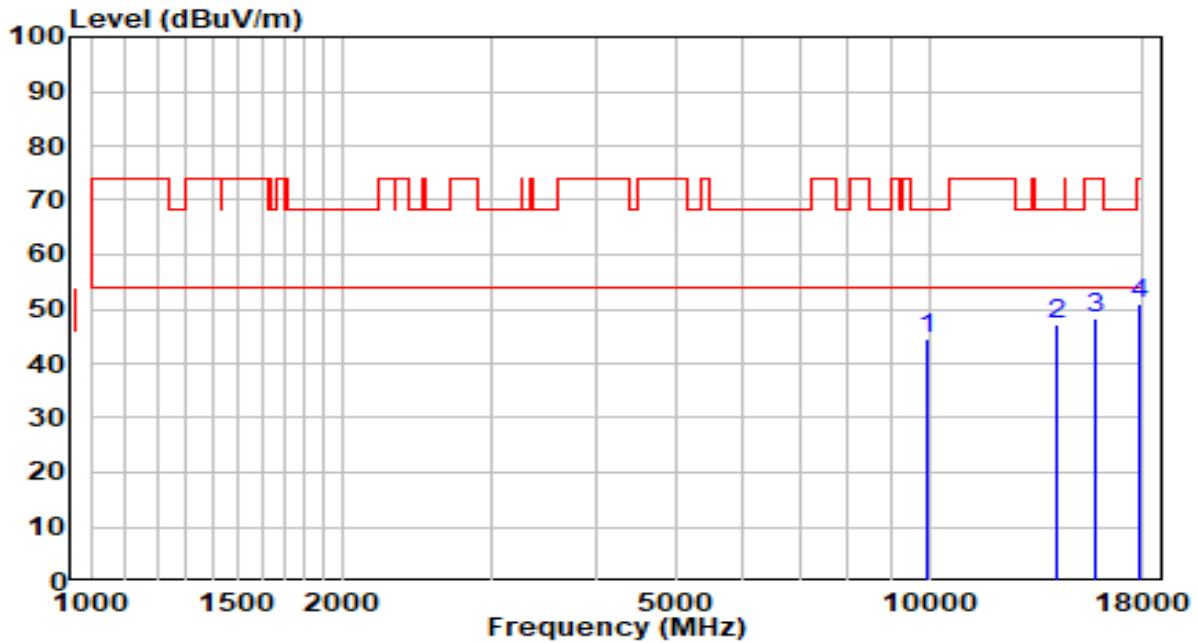


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9942.000	28.12	16.46	44.58	-23.62	68.20	Peak
2	* 14243.000	24.70	22.44	47.14	-21.06	68.20	Peak
3	15807.000	27.90	20.59	48.49	-25.51	74.00	Peak
4	17855.500	19.57	31.20	50.77	-23.23	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	120V/60Hz

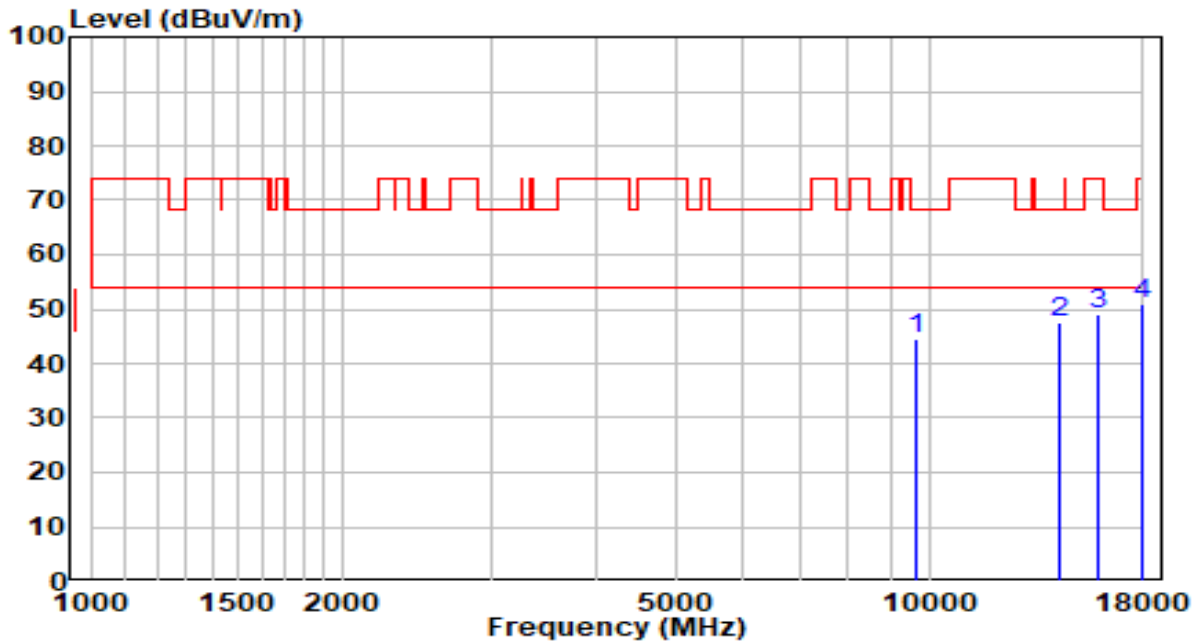


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9678.500	28.57	16.02	44.59	-23.61	68.20	Peak
2	* 14260.000	24.92	22.44	47.36	-20.84	68.20	Peak
3	15926.000	28.74	20.29	49.03	-24.97	74.00	Peak
4	17983.000	18.55	32.41	50.96	-23.04	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	120V/60Hz

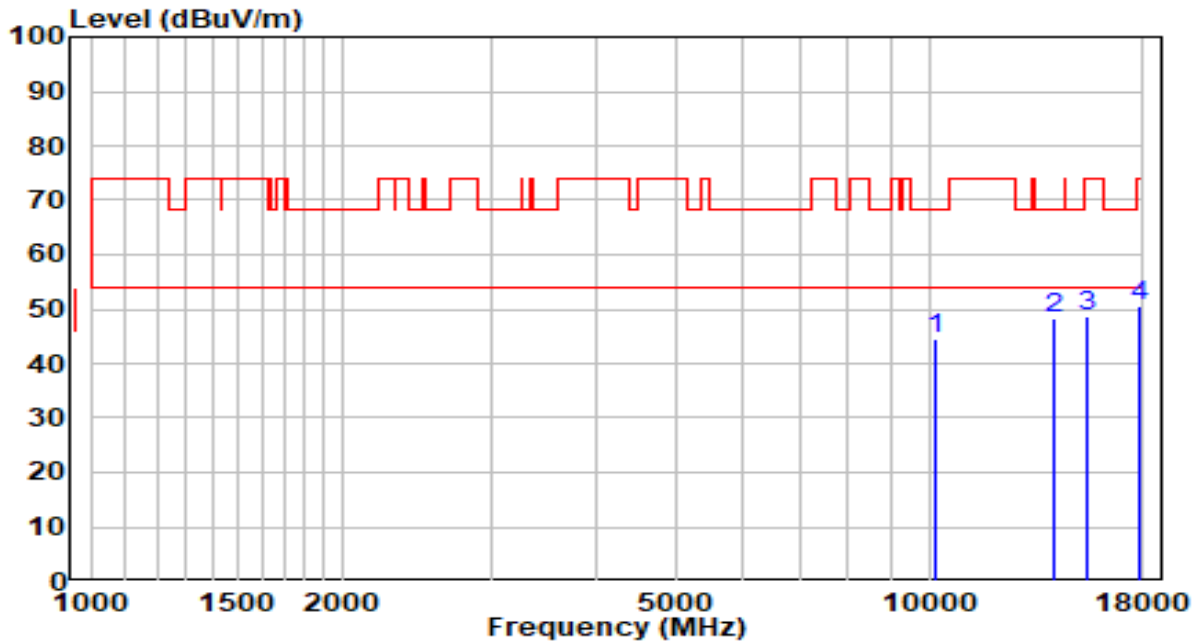


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10188.500	27.29	17.32	44.61	-23.59	68.20	Peak
2	* 14115.500	26.03	22.43	48.46	-19.74	68.20	Peak
3	15390.500	27.28	21.51	48.79	-25.21	74.00	Peak
4	17821.500	19.69	30.88	50.57	-23.43	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5690MHz	Test Voltage	120V/60Hz

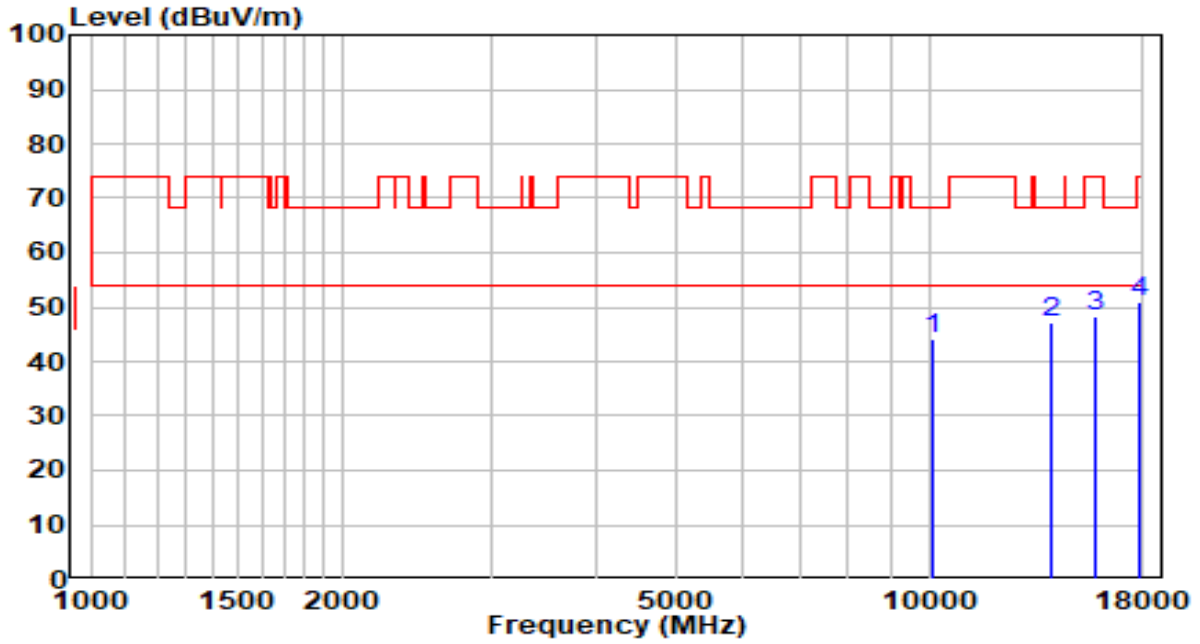


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10112.000	27.21	17.01	44.22	-23.98	68.20	Peak
2	* 13996.500	24.83	22.42	47.25	-20.95	68.20	Peak
3	15824.000	27.84	20.55	48.39	-25.61	74.00	Peak
4	17787.500	20.40	30.56	50.96	-23.04	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5690MHz	Test Voltage	120V/60Hz

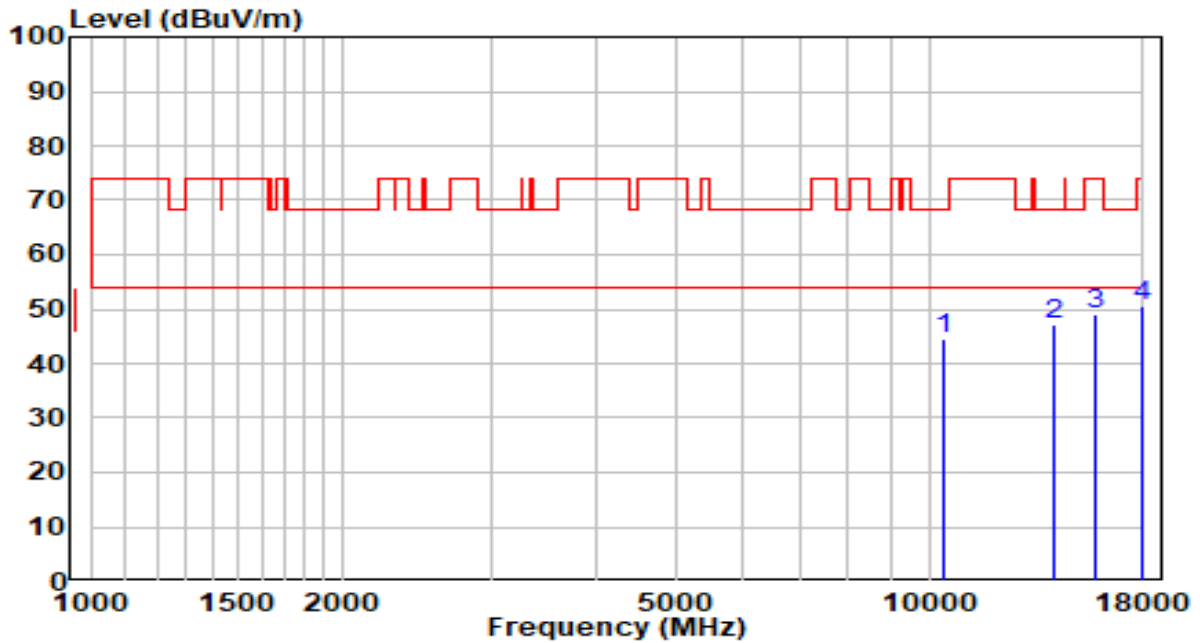


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10392.500	26.33	18.14	44.47	-23.73	68.20	Peak
2	* 14132.500	24.73	22.43	47.16	-21.04	68.20	Peak
3	15832.500	28.52	20.53	49.05	-24.95	74.00	Peak
4	17966.000	18.13	32.25	50.38	-23.62	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	120V/60Hz

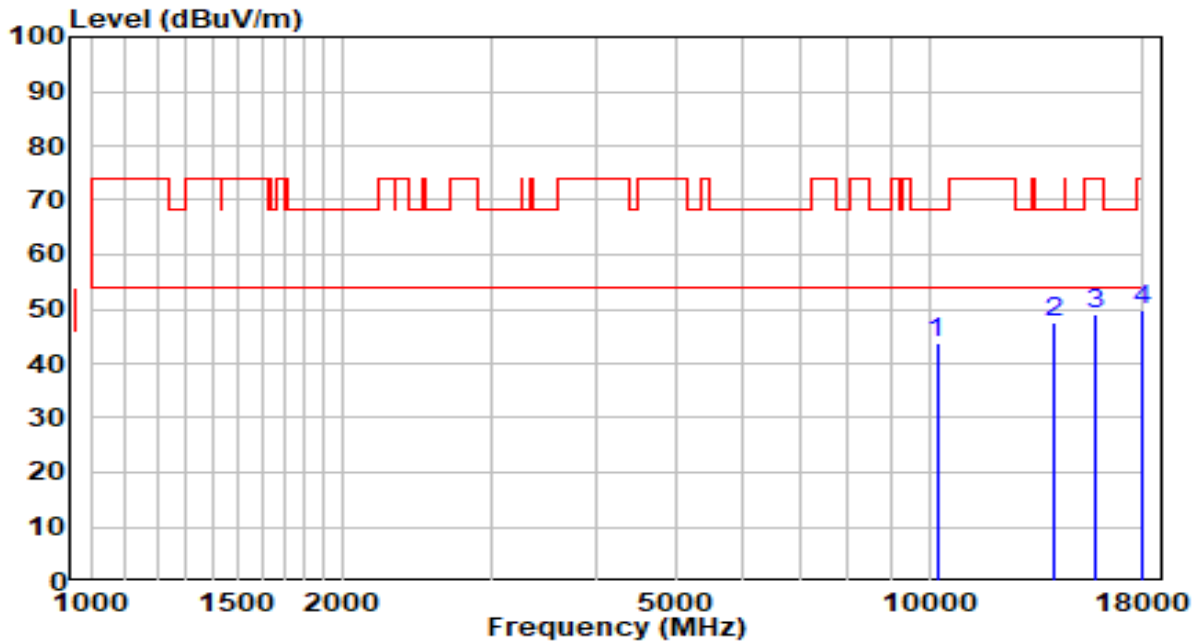


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10214.000	26.43	17.42	43.85	-24.35	68.20	Peak
2	* 14132.500	24.95	22.43	47.38	-20.82	68.20	Peak
3	15841.000	28.62	20.50	49.12	-24.88	74.00	Peak
4	18000.000	17.33	32.57	49.90	-24.10	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	120V/60Hz

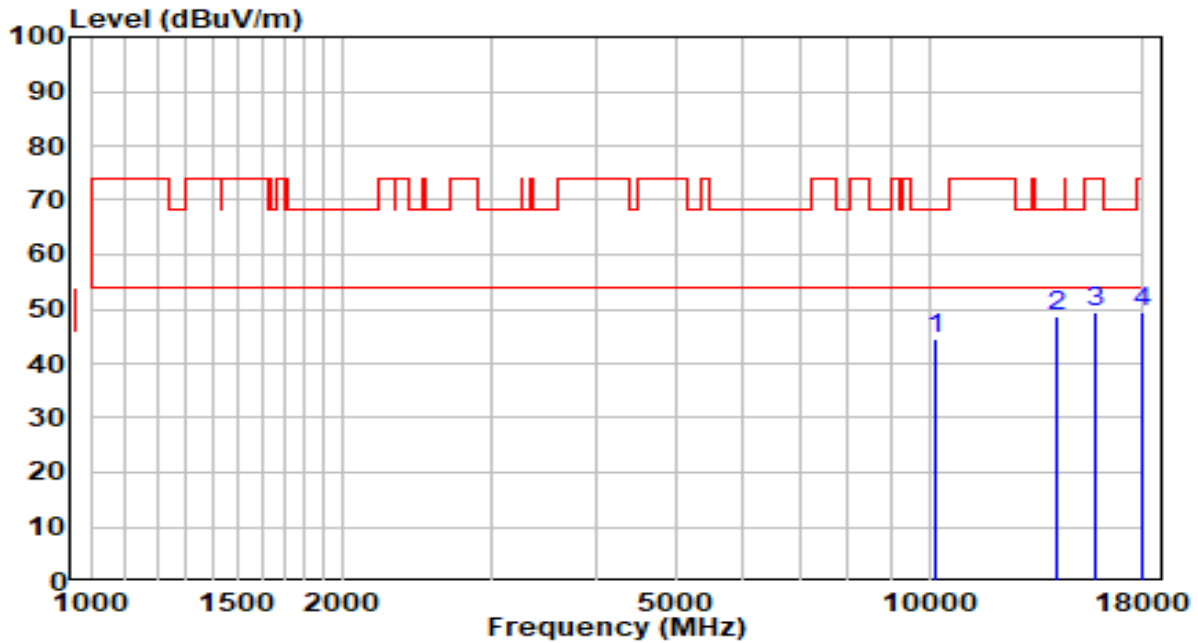


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10188.500	27.26	17.32	44.58	-23.62	68.20	Peak
2	* 14200.500	26.25	22.43	48.69	-19.51	68.20	Peak
3	15747.500	28.54	20.74	49.28	-24.72	74.00	Peak
4	17915.000	17.68	31.77	49.45	-24.55	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2020-11-18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.5°C/53.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5250MHz	Test Voltage	120V/60Hz

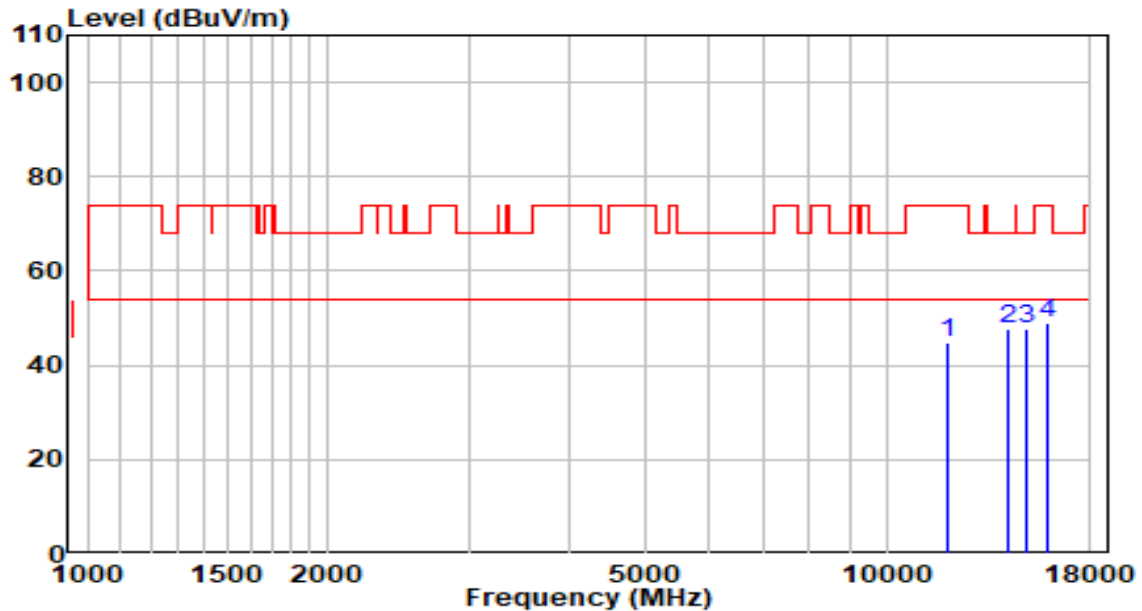


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	11897.000	25.52	19.15	44.67	-29.33	74.00	Peak
2	* 14234.500	25.43	22.44	47.86	-20.34	68.20	Peak
3	15016.500	25.53	22.07	47.60	-20.60	68.20	Peak
4	15858.000	28.65	20.46	49.12	-24.88	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2020-11-18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.5°C/53.8%
Polarity	Vertical	Site / Test Engineer	2020-11-18
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5250MHz	Test Voltage	120V/60Hz

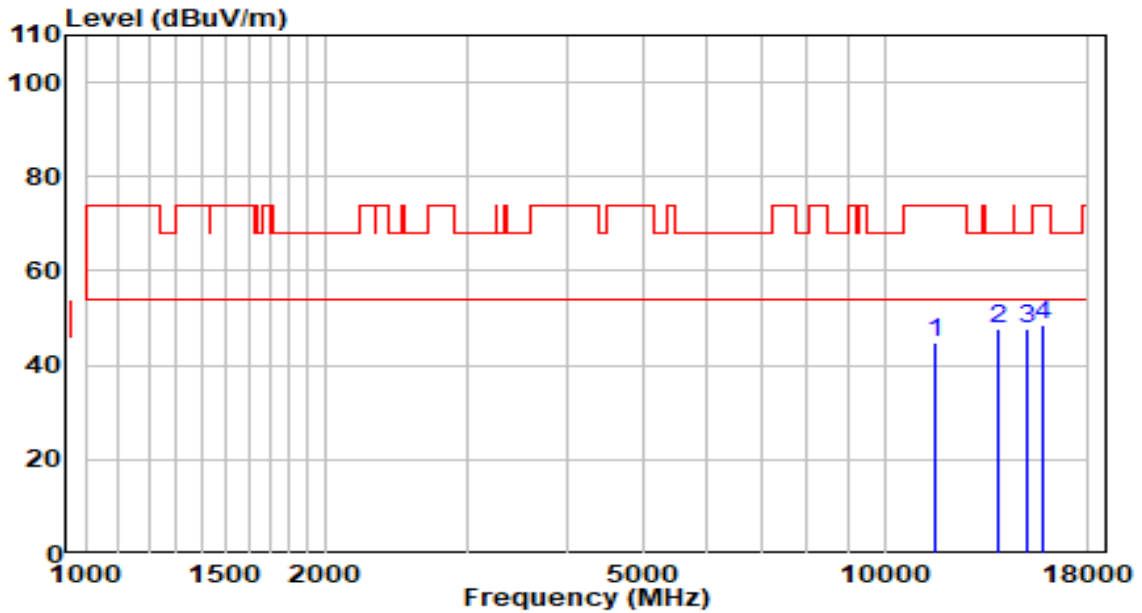


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	11565.500	24.91	19.90	44.81	-29.19	74.00	Peak
2	* 13860.500	25.32	22.26	47.59	-20.61	68.20	Peak
3	15118.500	25.66	21.91	47.58	-20.62	68.20	Peak
4	15739.000	27.77	20.76	48.52	-25.48	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2020-11-18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.5°C/53.8%
Polarity	Horizontal	Site / Test Engineer	2020-11-18
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5570MHz	Test Voltage	120V/60Hz

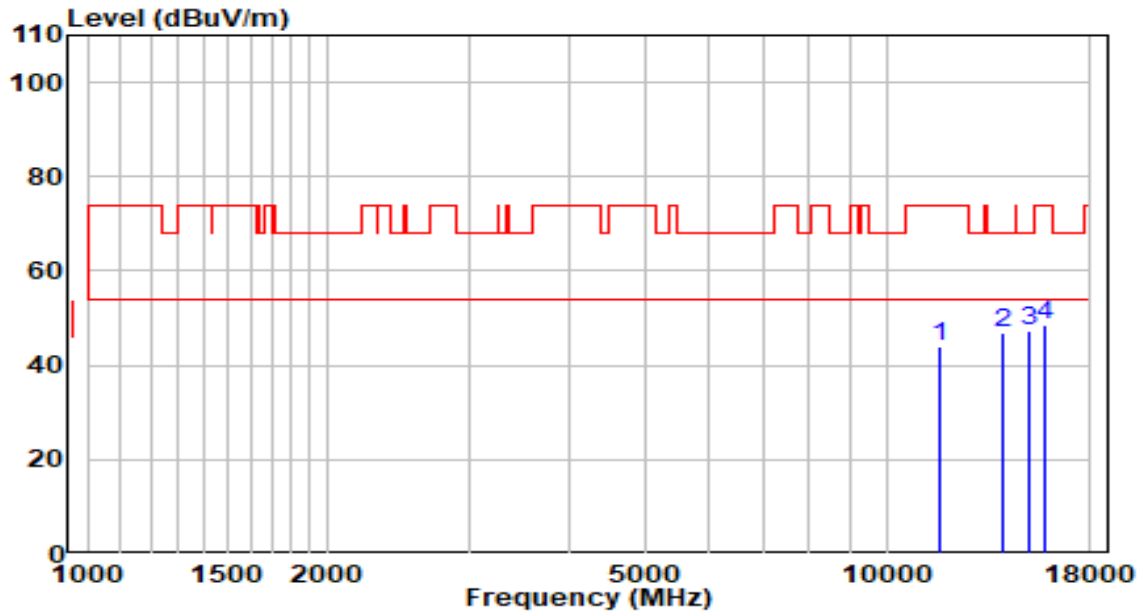


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	11642.000	24.19	19.73	43.92	-30.08	74.00	Peak
2	13954.000	24.44	22.37	46.81	-21.39	68.20	Peak
3	* 15059.000	25.16	22.00	47.16	-21.04	68.20	Peak
4	15764.500	27.74	20.69	48.43	-25.57	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2020-11-18
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.5°C/53.8%
Polarity	Vertical	Site / Test Engineer	2020-11-18
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5570MHz	Test Voltage	120V/60Hz

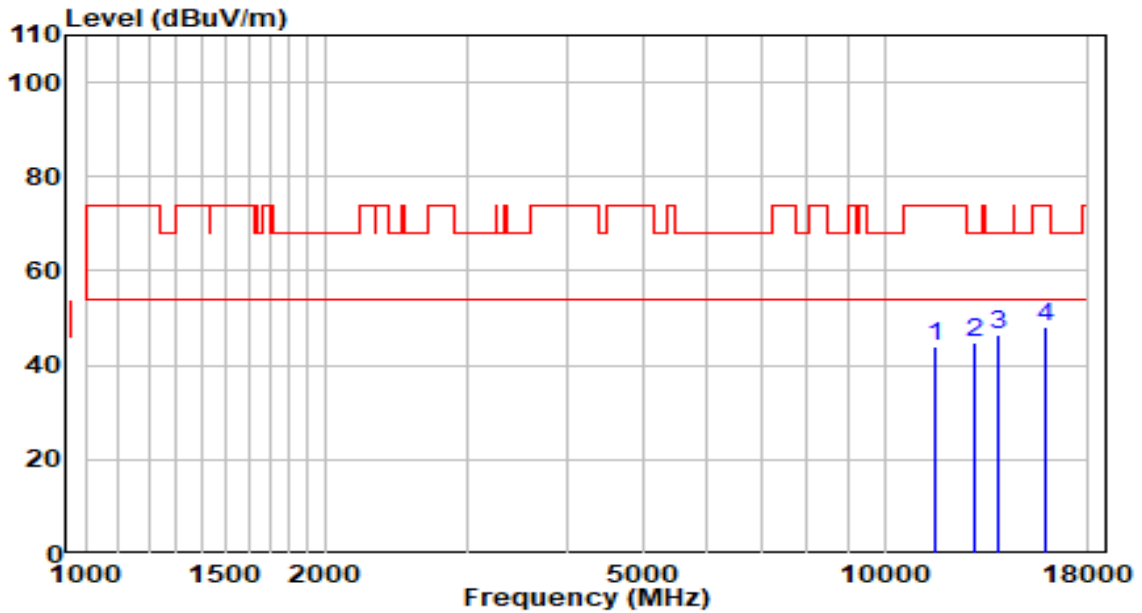


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	11565.500	24.07	19.90	43.97	-30.03	74.00	Peak
2	12951.000	25.11	19.74	44.85	-23.35	68.20	Peak
3	* 13886.000	24.16	22.29	46.45	-21.75	68.20	Peak
4	15892.000	27.64	20.38	48.02	-25.98	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	120V/60Hz

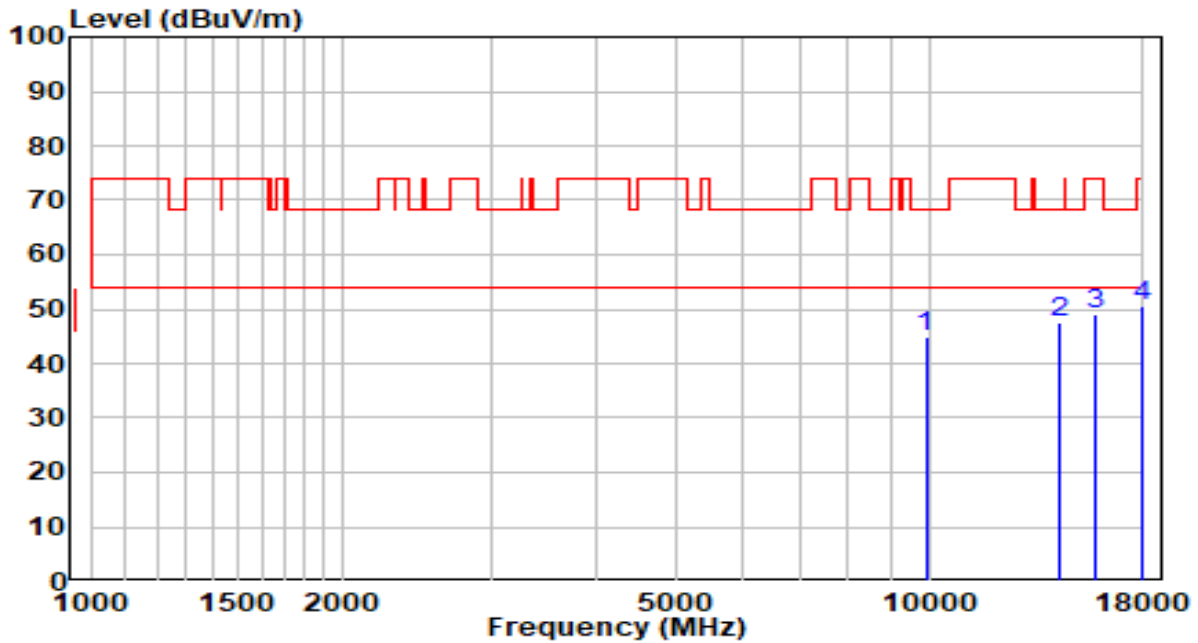


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9908.000	28.66	16.41	45.06	-23.14	68.20	Peak
2	* 14345.000	25.02	22.44	47.47	-20.73	68.20	Peak
3	15730.500	28.13	20.78	48.91	-25.09	74.00	Peak
4	17957.500	18.56	32.17	50.73	-23.27	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	120V/60Hz

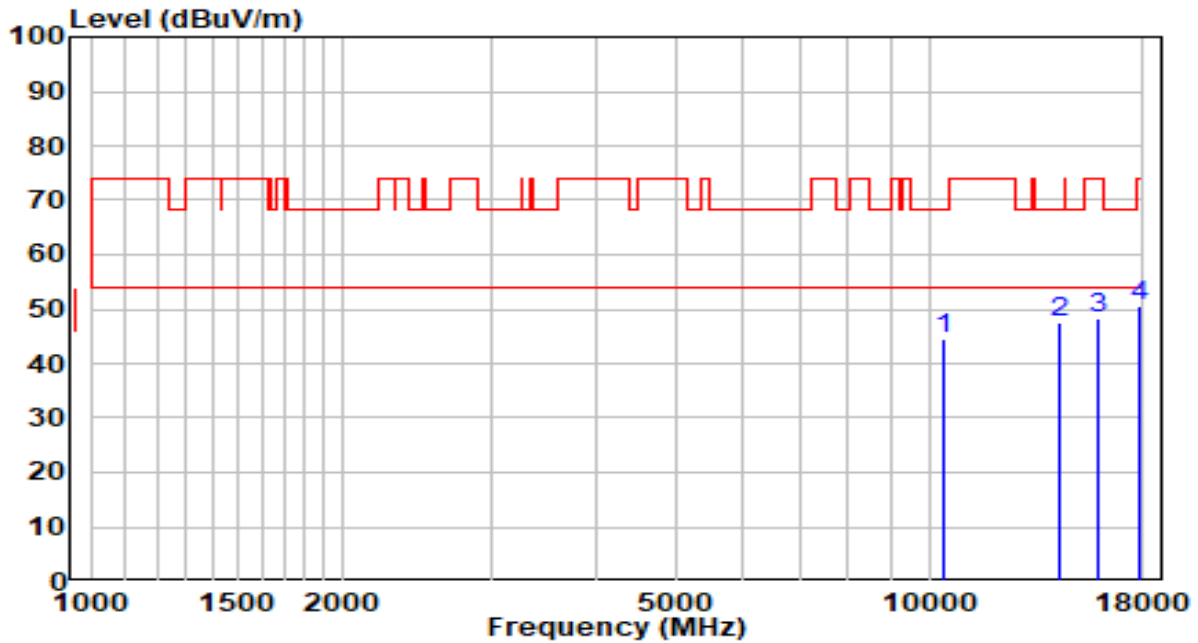


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10401.000	26.20	18.17	44.37	-23.83	68.20	Peak
2	* 14294.000	24.95	22.44	47.39	-20.81	68.20	Peak
3	15858.000	27.76	20.46	48.22	-25.78	74.00	Peak
4	17787.500	20.04	30.56	50.60	-23.40	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5220MHz	Test Voltage	120V/60Hz

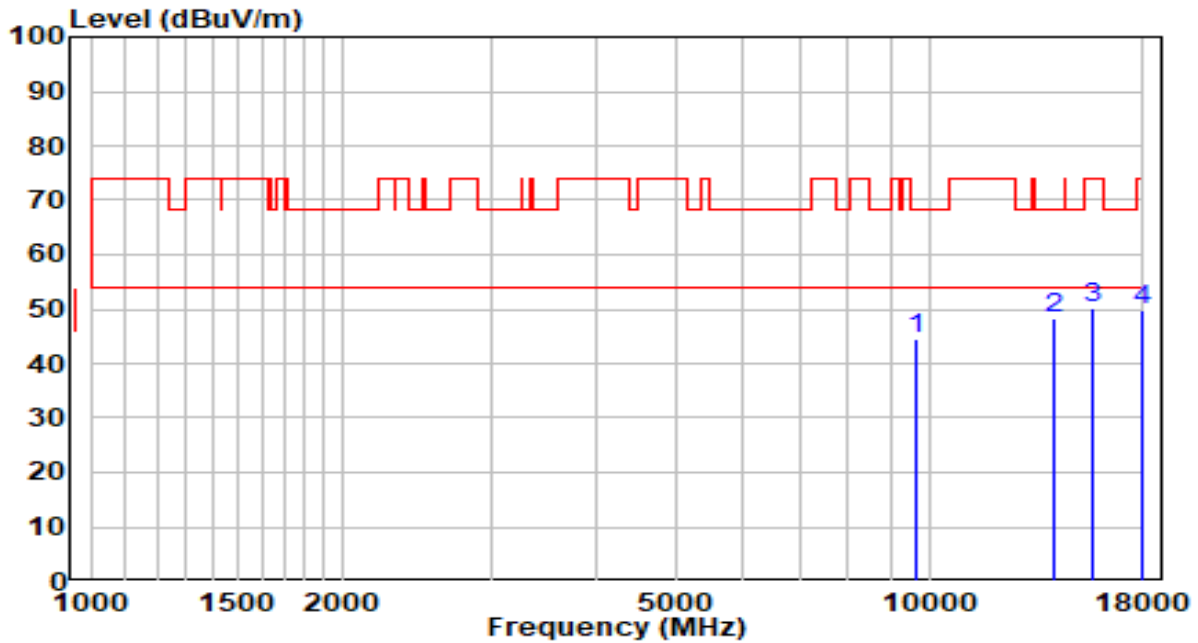


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9653.000	28.57	15.98	44.55	-23.65	68.20	Peak
2	* 14124.000	25.71	22.43	48.14	-20.06	68.20	Peak
3	15671.000	29.23	20.93	50.16	-23.84	74.00	Peak
4	17966.000	17.57	32.25	49.82	-24.18	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5220MHz	Test Voltage	120V/60Hz

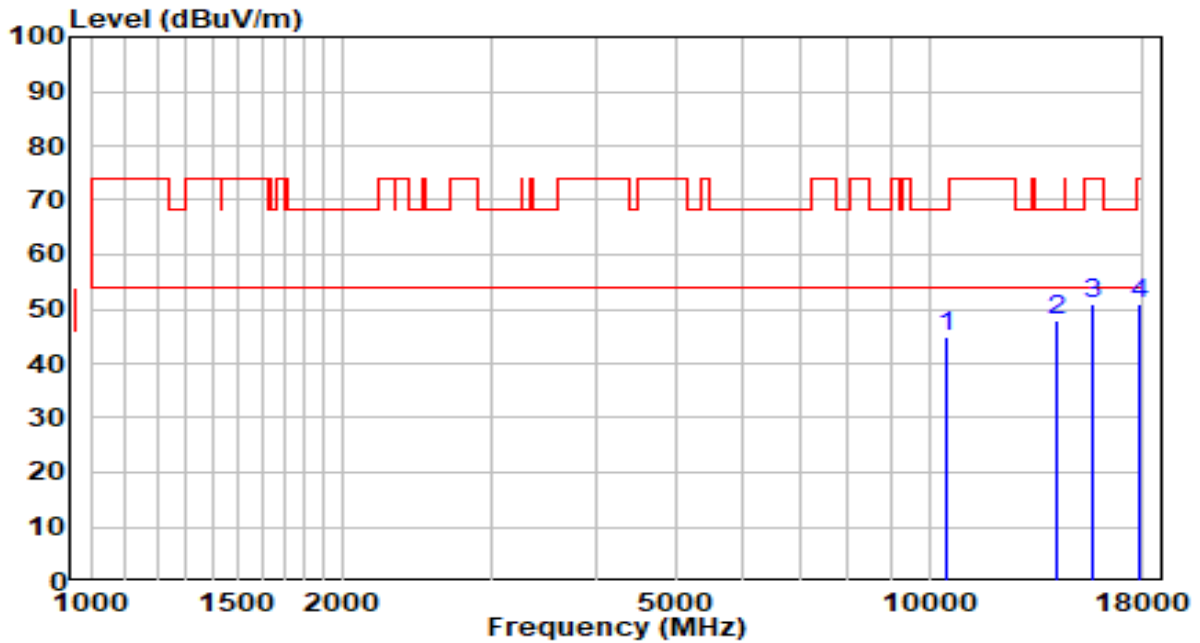


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10477.500	26.29	18.48	44.77	-23.43	68.20	Peak
2	* 14158.000	25.37	22.43	47.80	-20.40	68.20	Peak
3	15662.500	29.97	20.95	50.92	-23.08	74.00	Peak
4	17864.000	19.57	31.28	50.85	-23.15	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz	Test Voltage	120V/60Hz

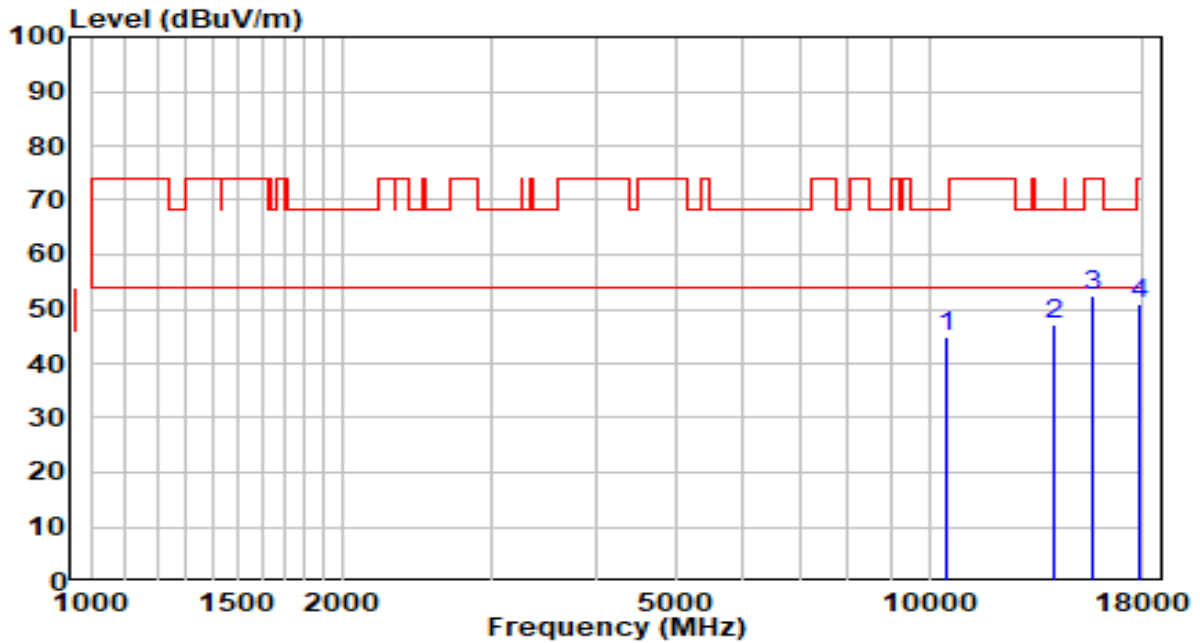


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10477.500	26.44	18.48	44.92	-23.28	68.20	Peak
2	* 14115.500	24.89	22.43	47.32	-20.88	68.20	Peak
3	15722.000	31.78	20.80	52.58	-21.42	74.00	Peak
4	17779.000	20.35	30.48	50.83	-23.17	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz	Test Voltage	120V/60Hz

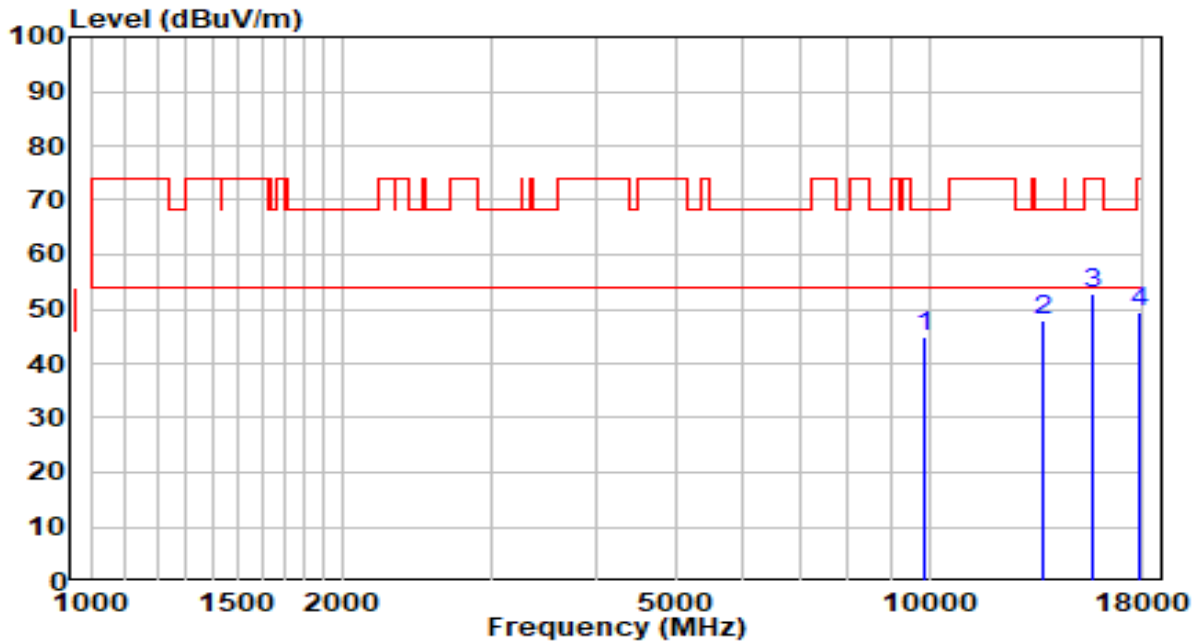


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9874.000	28.41	16.35	44.76	-23.44	68.20	Peak
2	* 13639.500	25.89	22.01	47.91	-20.29	68.20	Peak
3	15722.000	32.07	20.80	52.87	-21.13	74.00	Peak
4	17864.000	18.09	31.28	49.37	-24.63	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5260MHz	Test Voltage	120V/60Hz

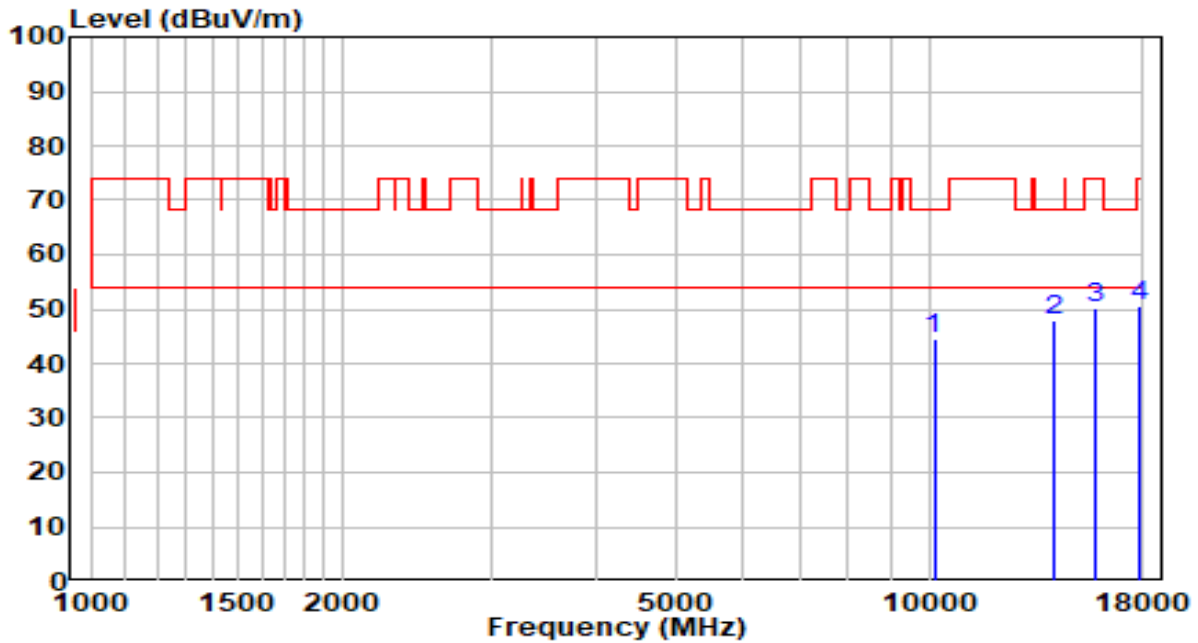


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10137.500	27.47	17.11	44.58	-23.62	68.20	Peak
2	* 14056.000	25.59	22.42	48.02	-20.18	68.20	Peak
3	15781.500	29.38	20.65	50.03	-23.97	74.00	Peak
4	17813.000	19.78	30.80	50.58	-23.42	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5260MHz	Test Voltage	120V/60Hz

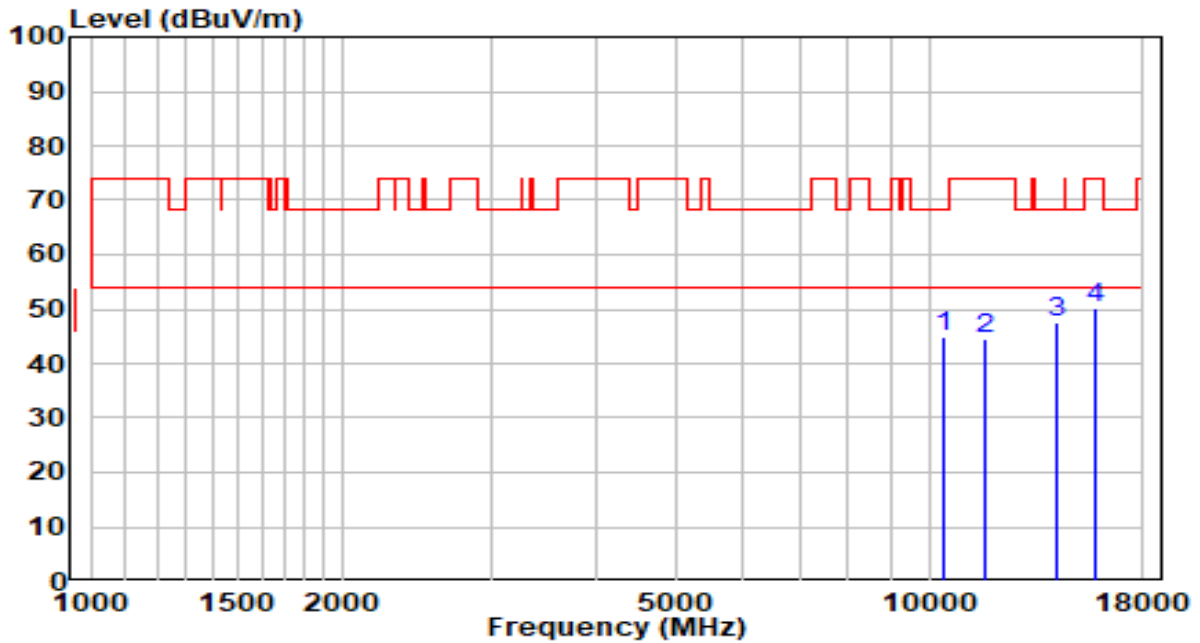


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10435.000	26.61	18.31	44.92	-23.28	68.20	Peak
2	11693.000	24.90	19.61	44.51	-29.49	74.00	Peak
3	* 14243.000	25.10	22.44	47.54	-20.66	68.20	Peak
4	15790.000	29.63	20.63	50.26	-23.74	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5300MHz	Test Voltage	120V/60Hz

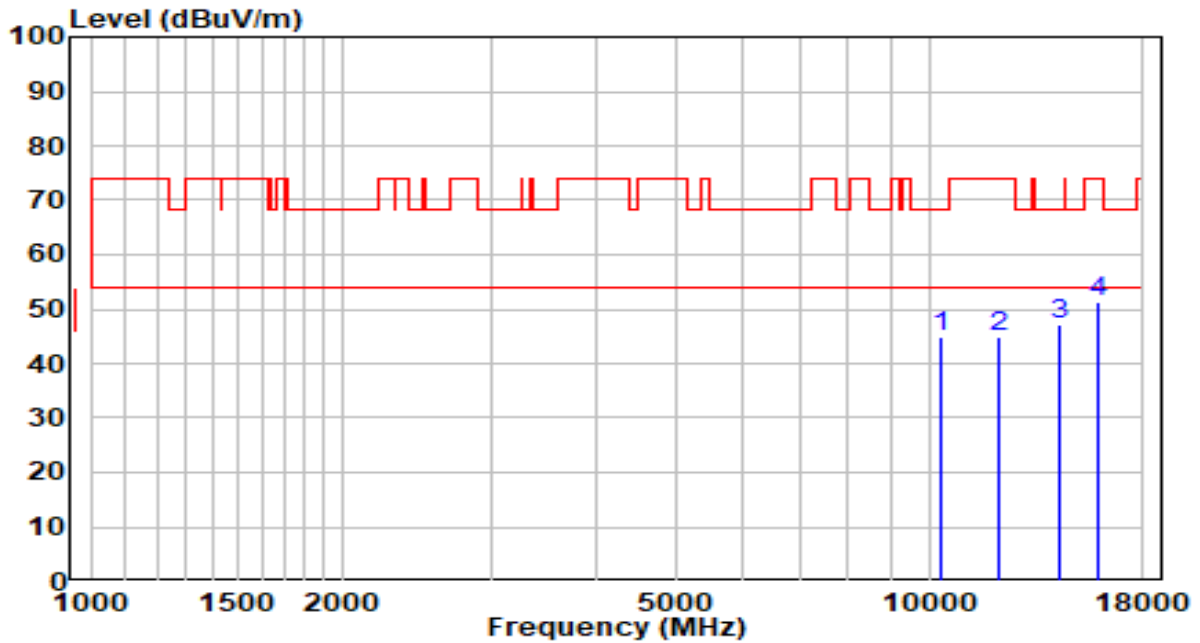


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10307.500	27.01	17.80	44.81	-23.39	68.20	Peak
2	12126.500	26.14	18.79	44.93	-29.07	74.00	Peak
3	* 14311.000	24.82	22.44	47.26	-20.94	68.20	Peak
4	15900.500	31.14	20.36	51.50	-22.50	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5300MHz	Test Voltage	120V/60Hz

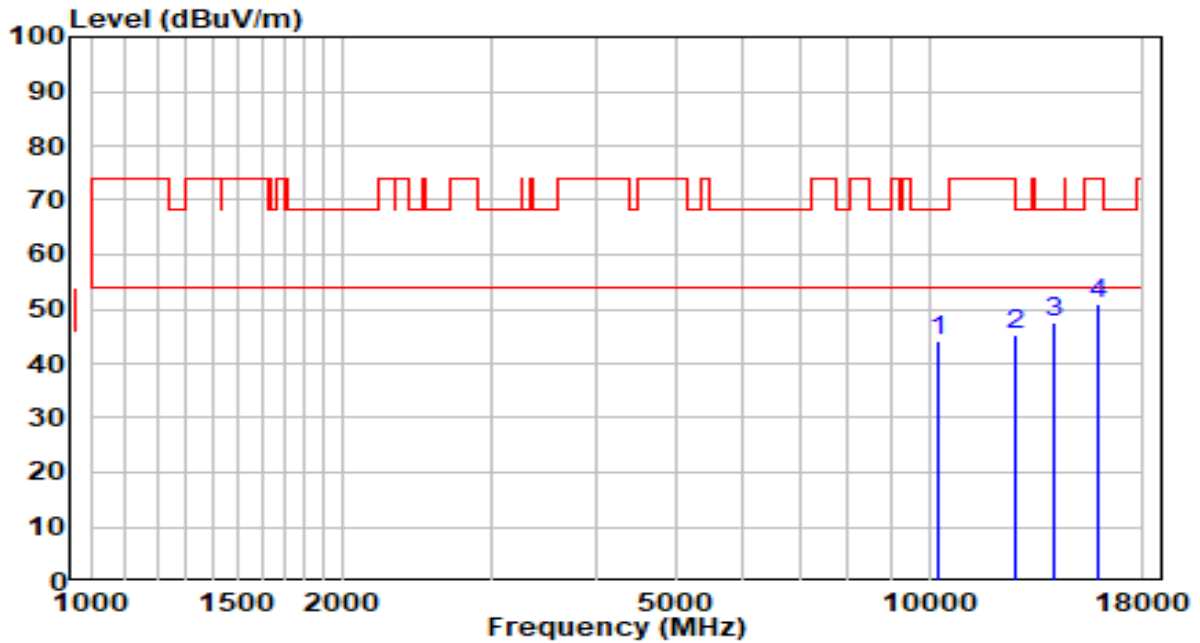


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10248.000	26.41	17.56	43.97	-24.23	68.20	Peak
2	12636.500	26.31	18.81	45.12	-28.88	74.00	Peak
3	* 14081.500	24.97	22.43	47.40	-20.80	68.20	Peak
4	15900.500	30.46	20.36	50.82	-23.18	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	120V/60Hz

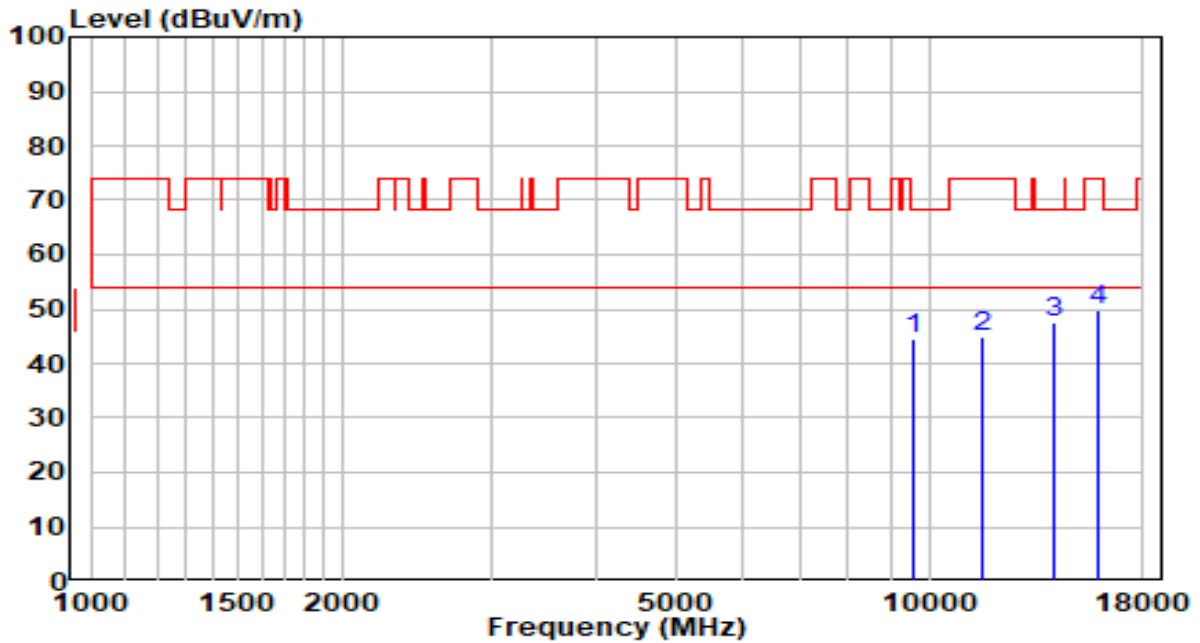


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9559.500	28.62	15.82	44.44	-23.76	68.20	Peak
2	11582.500	25.17	19.86	45.03	-28.97	74.00	Peak
3	* 14132.500	25.01	22.43	47.44	-20.76	68.20	Peak
4	15960.000	29.72	20.21	49.93	-24.07	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	120V/60Hz

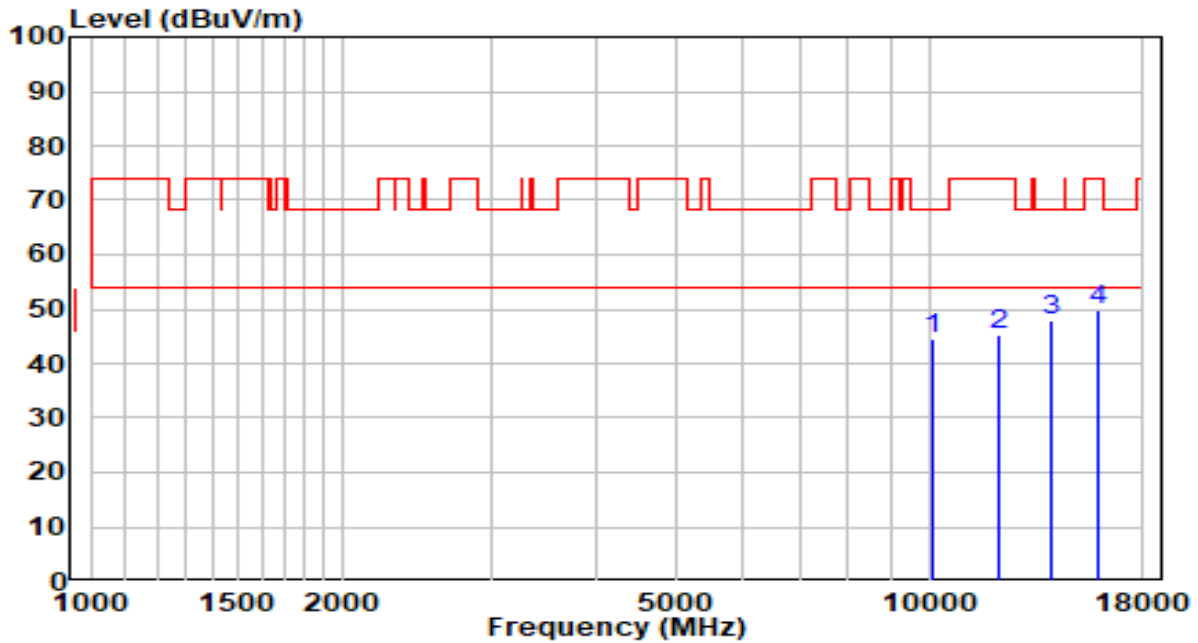


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10095.000	27.43	16.94	44.37	-23.83	68.20	Peak
2	12075.500	26.30	18.84	45.14	-28.86	74.00	Peak
3	* 13979.500	25.38	22.40	47.78	-20.42	68.20	Peak
4	15951.500	29.76	20.23	49.99	-24.01	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	120V/60Hz

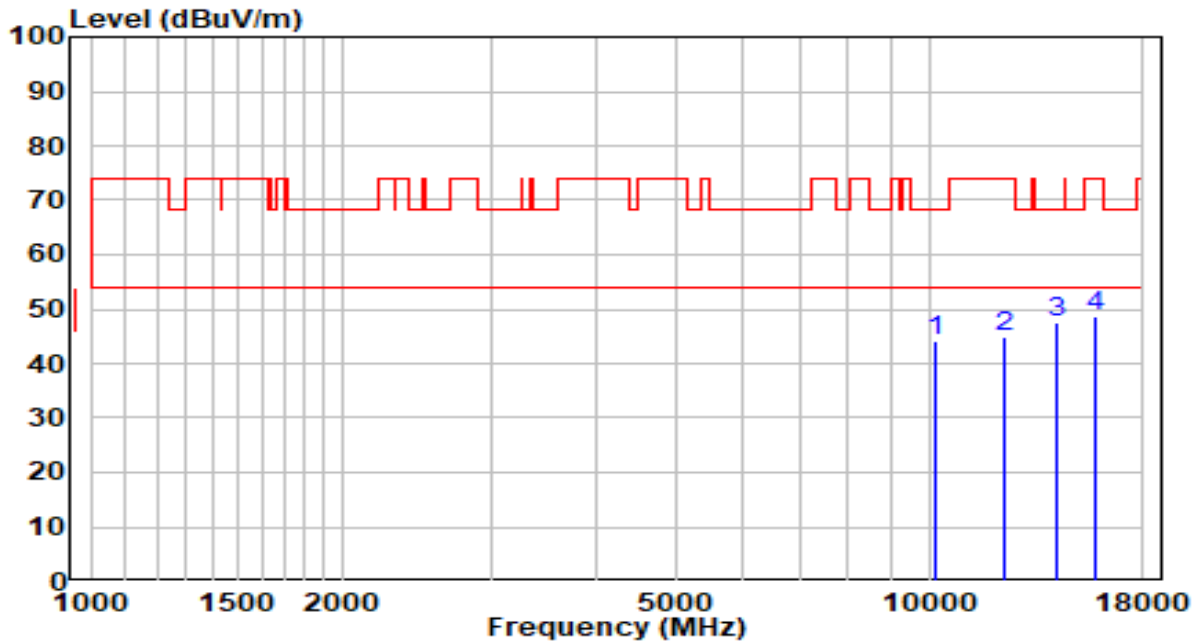


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10188.500	26.87	17.32	44.19	-24.01	68.20	Peak
2	12305.000	26.48	18.61	45.09	-28.91	74.00	Peak
3	* 14209.000	25.07	22.43	47.50	-20.70	68.20	Peak
4	15824.000	28.08	20.55	48.63	-25.37	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	120V/60Hz

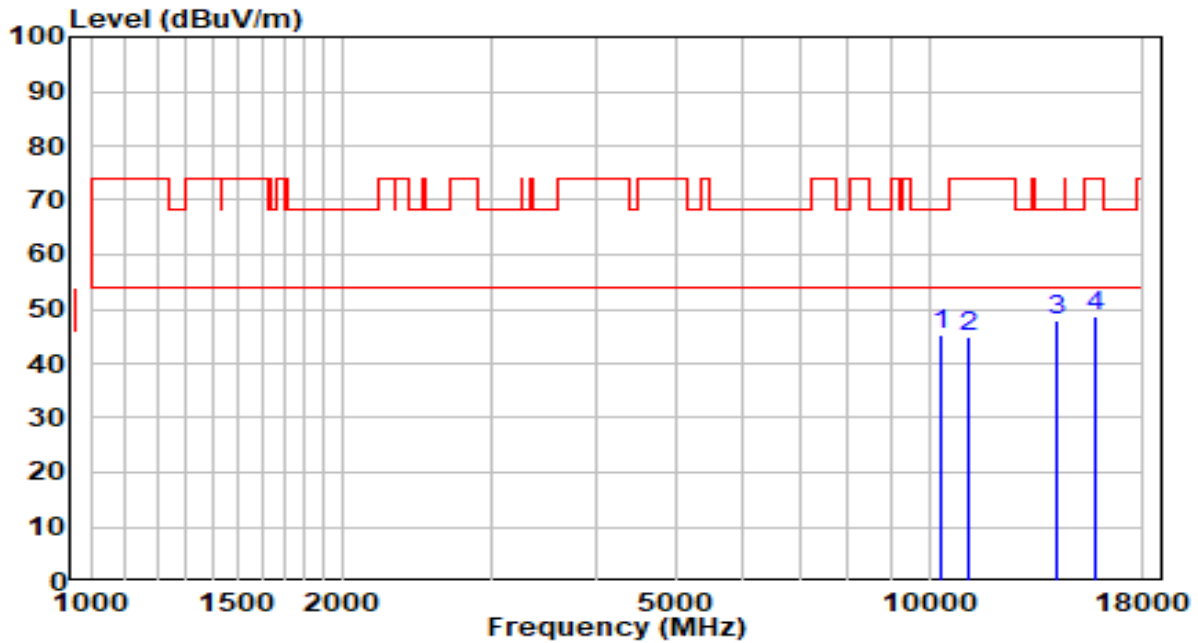


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10307.500	27.35	17.80	45.15	-23.05	68.20	Peak
2	11157.500	25.26	19.52	44.78	-29.22	74.00	Peak
3	* 14234.500	25.44	22.44	47.88	-20.32	68.20	Peak
4	15798.500	28.02	20.61	48.63	-25.37	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5580MHz	Test Voltage	120V/60Hz

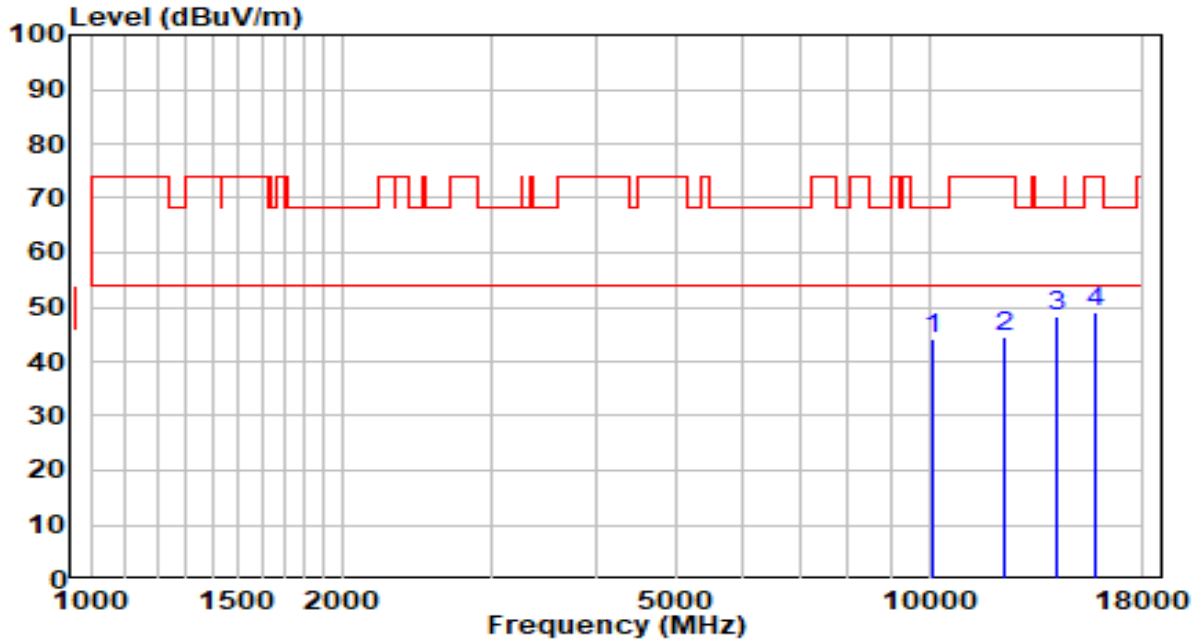


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10069.500	27.28	16.84	44.12	-24.08	68.20	Peak
2	12322.000	26.10	18.59	44.69	-29.31	74.00	Peak
3	* 14166.500	25.99	22.43	48.42	-19.78	68.20	Peak
4	15841.000	28.64	20.50	49.14	-24.86	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5580MHz	Test Voltage	120V/60Hz

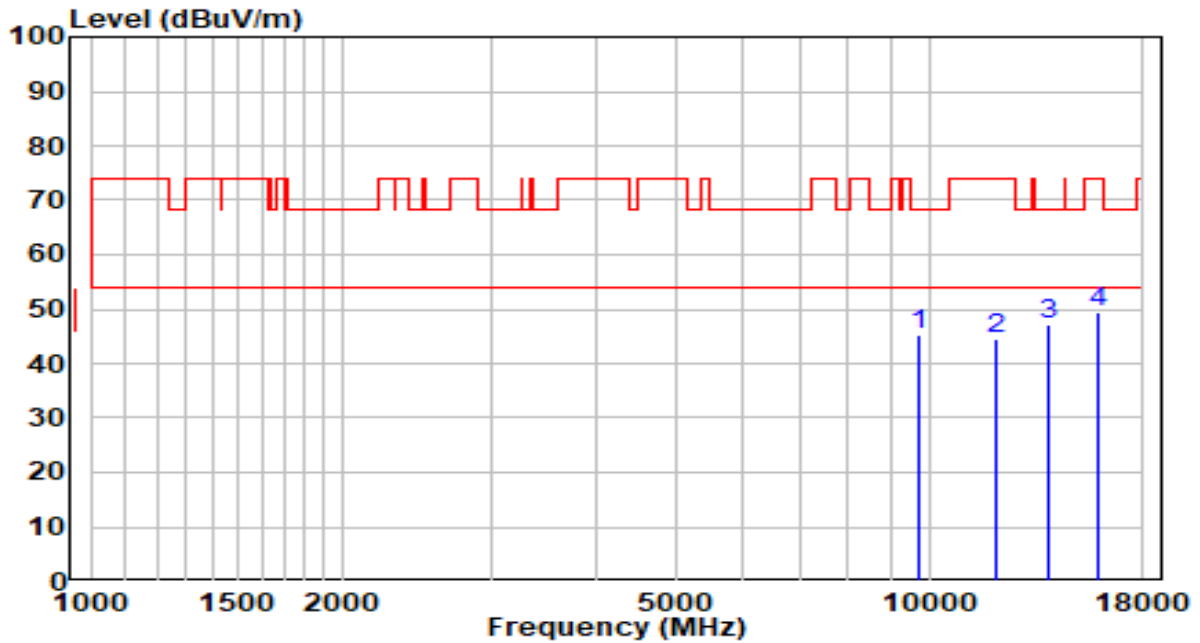


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9746.500	28.98	16.13	45.12	-23.08	68.20	Peak
2	12058.500	25.62	18.86	44.48	-29.52	74.00	Peak
3	* 13920.000	24.66	22.33	46.99	-21.21	68.20	Peak
4	15934.500	28.98	20.27	49.25	-24.75	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	120V/60Hz

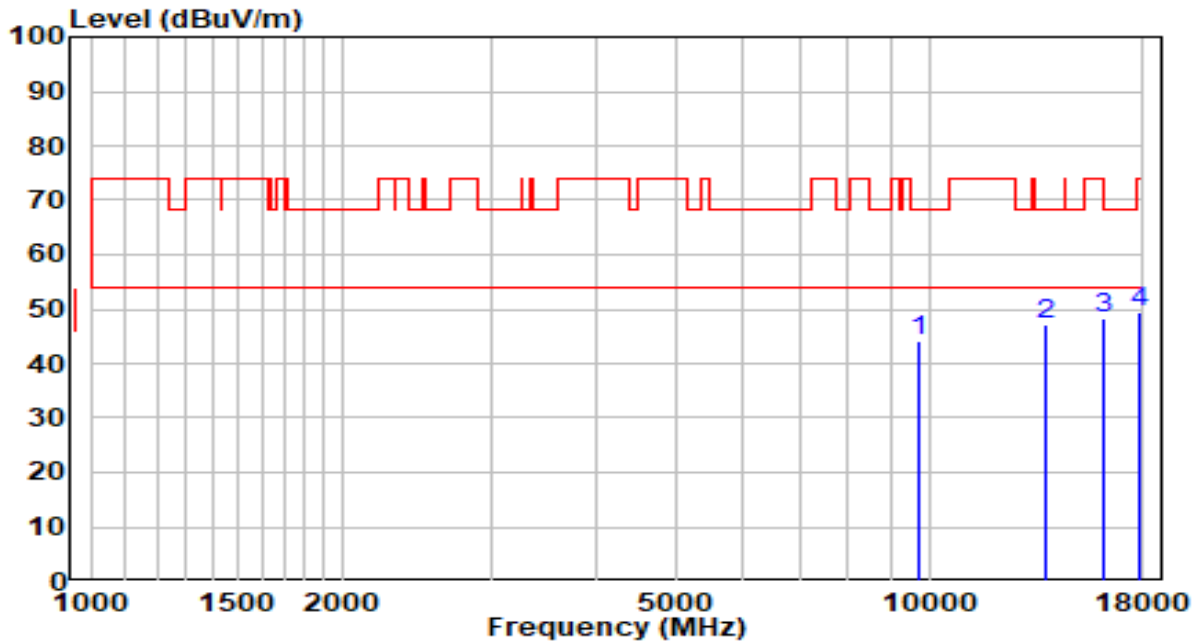


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9755.000	28.04	16.15	44.19	-24.01	68.20	Peak
2	* 13741.500	25.19	22.13	47.32	-20.88	68.20	Peak
3	16138.500	27.95	20.43	48.38	-25.62	74.00	Peak
4	17864.000	18.16	31.28	49.44	-24.56	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	120V/60Hz

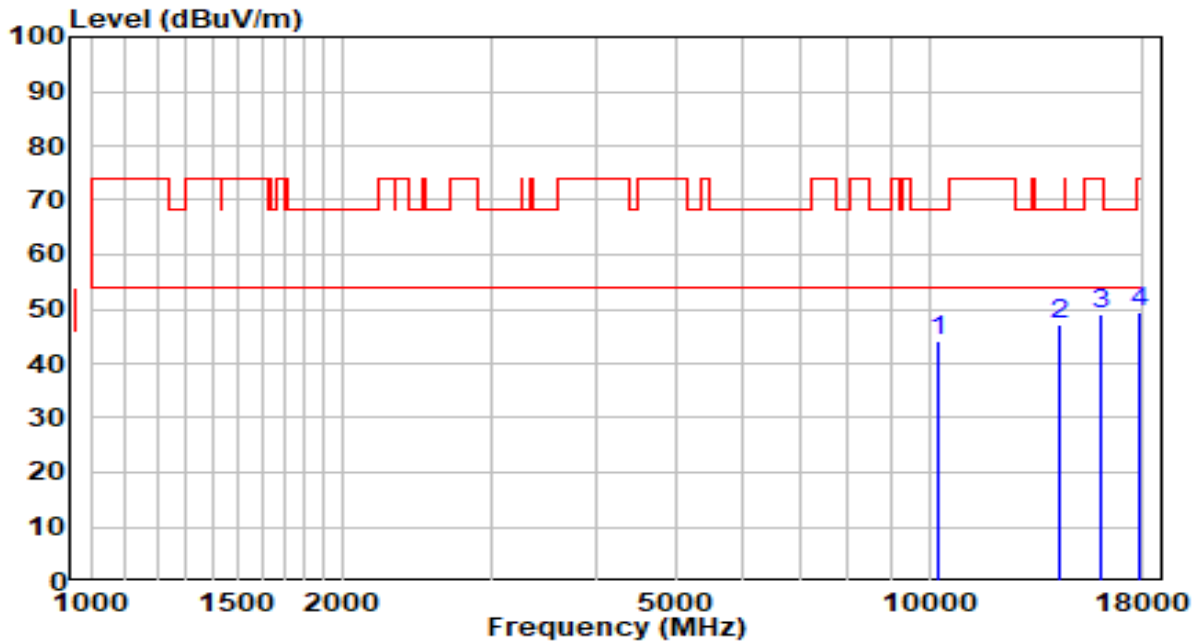


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10231.000	26.78	17.49	44.26	-23.94	68.20	Peak
2	* 14328.000	24.64	22.44	47.08	-21.12	68.20	Peak
3	16045.000	28.76	20.21	48.97	-25.03	74.00	Peak
4	17864.000	18.25	31.28	49.53	-24.47	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5720MHz	Test Voltage	120V/60Hz

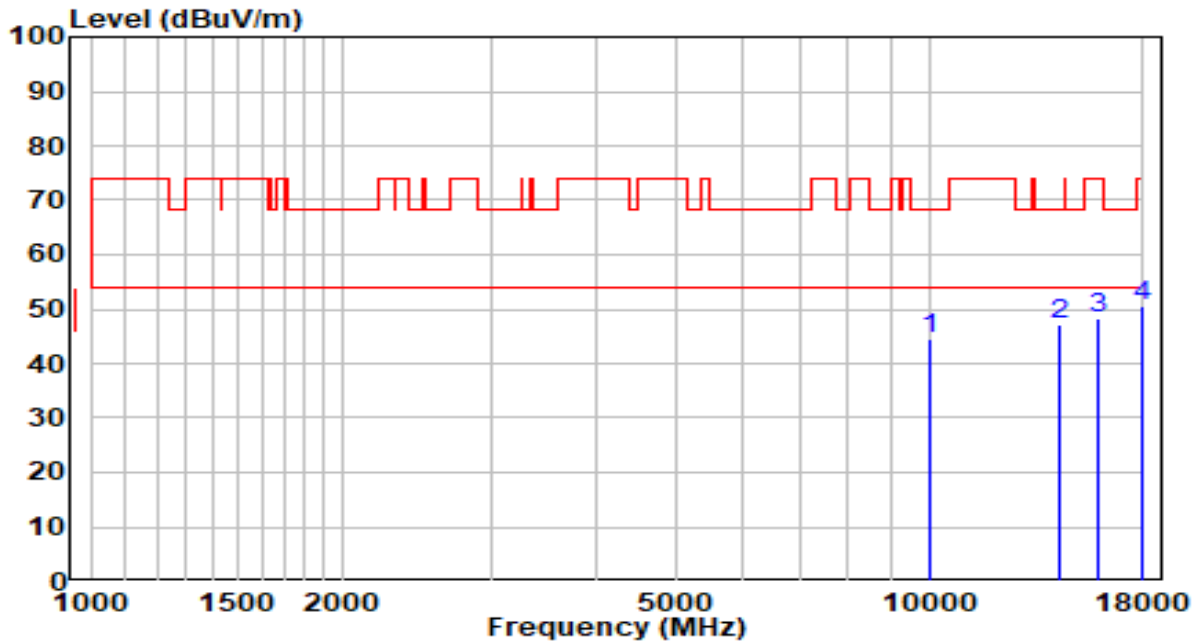


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10052.500	27.70	16.77	44.47	-23.73	68.20	Peak
2	* 14353.500	24.87	22.44	47.31	-20.89	68.20	Peak
3	15934.500	28.16	20.27	48.43	-25.57	74.00	Peak
4	17906.500	19.05	31.69	50.74	-23.26	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5720MHz	Test Voltage	120V/60Hz

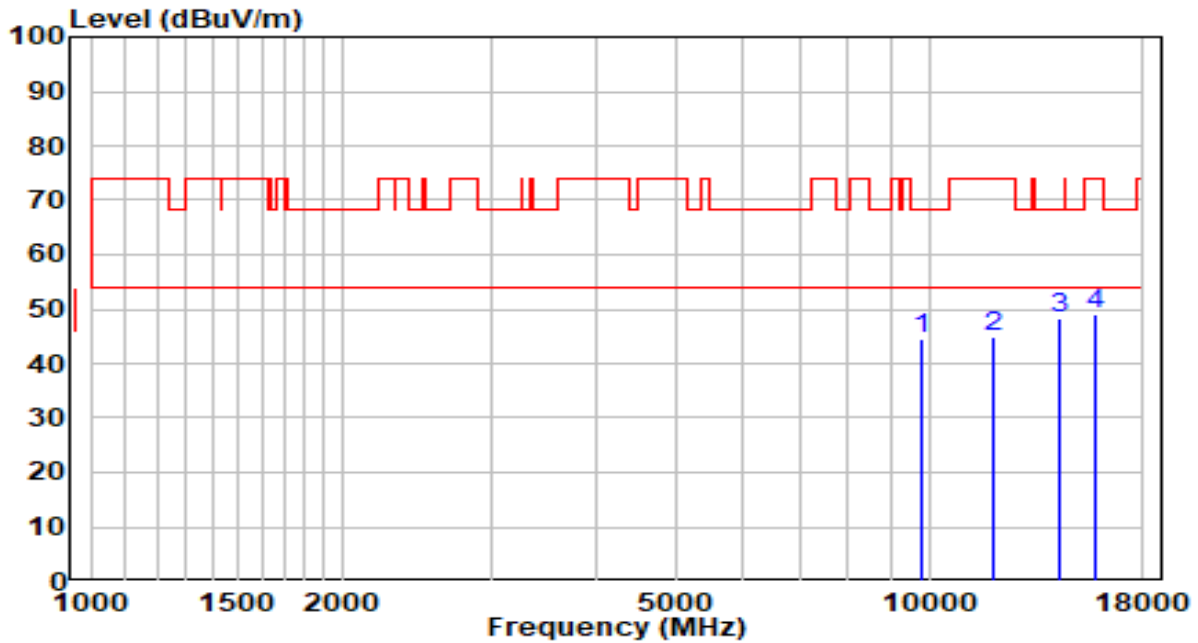


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9763.500	28.21	16.16	44.37	-23.83	68.20	Peak
2	11897.000	25.91	19.15	45.06	-28.94	74.00	Peak
3	* 14319.500	25.73	22.44	48.17	-20.03	68.20	Peak
4	15841.000	28.54	20.50	49.04	-24.96	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	120V/60Hz

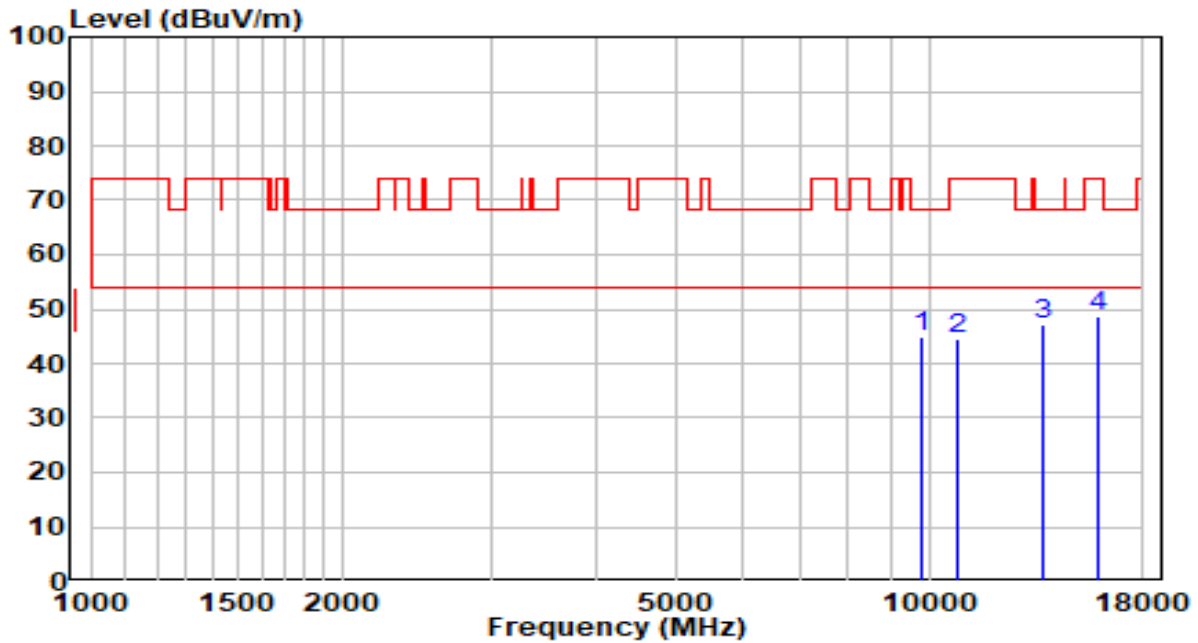


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9772.000	28.71	16.18	44.89	-23.31	68.20	Peak
2	10800.500	25.64	19.00	44.64	-29.36	74.00	Peak
3	* 13716.000	25.20	22.10	47.30	-20.90	68.20	Peak
4	15960.000	28.56	20.21	48.77	-25.23	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	120V/60Hz

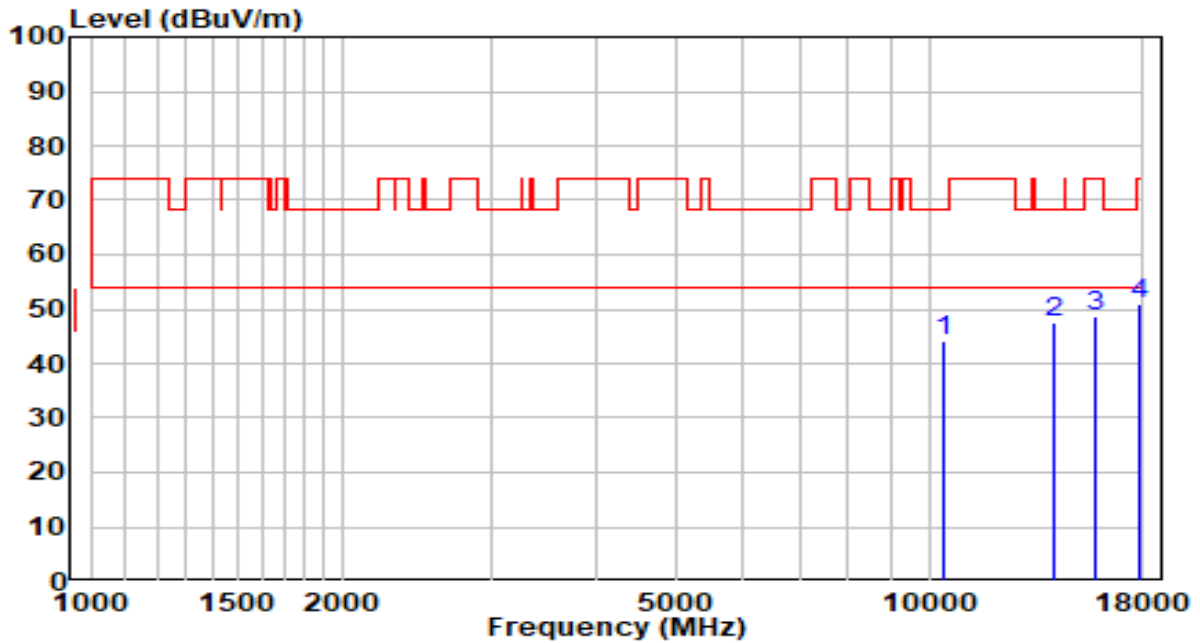


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10409.500	26.07	18.21	44.27	-23.93	68.20	Peak
2	* 14056.000	25.28	22.42	47.70	-20.50	68.20	Peak
3	15824.000	28.07	20.55	48.62	-25.38	74.00	Peak
4	17864.000	19.56	31.28	50.84	-23.16	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5785MHz	Test Voltage	120V/60Hz

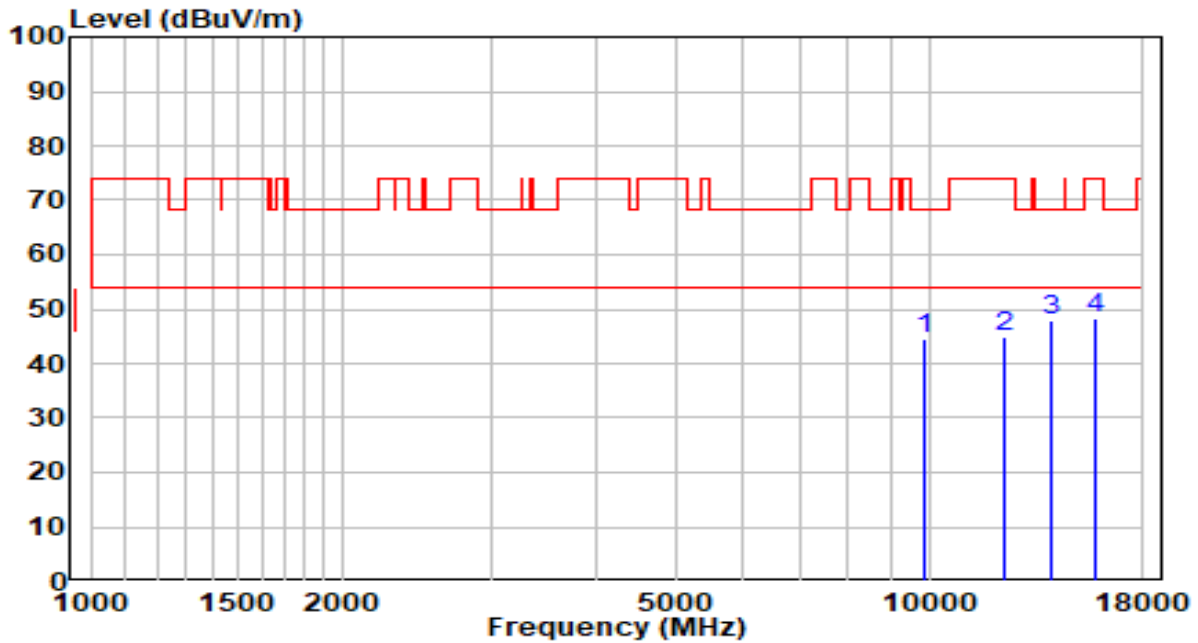


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9865.500	28.09	16.33	44.42	-23.78	68.20	Peak
2	12313.500	26.19	18.60	44.79	-29.21	74.00	Peak
3	* 14022.000	25.36	22.42	47.78	-20.42	68.20	Peak
4	15747.500	27.74	20.74	48.48	-25.52	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5785MHz	Test Voltage	120V/60Hz

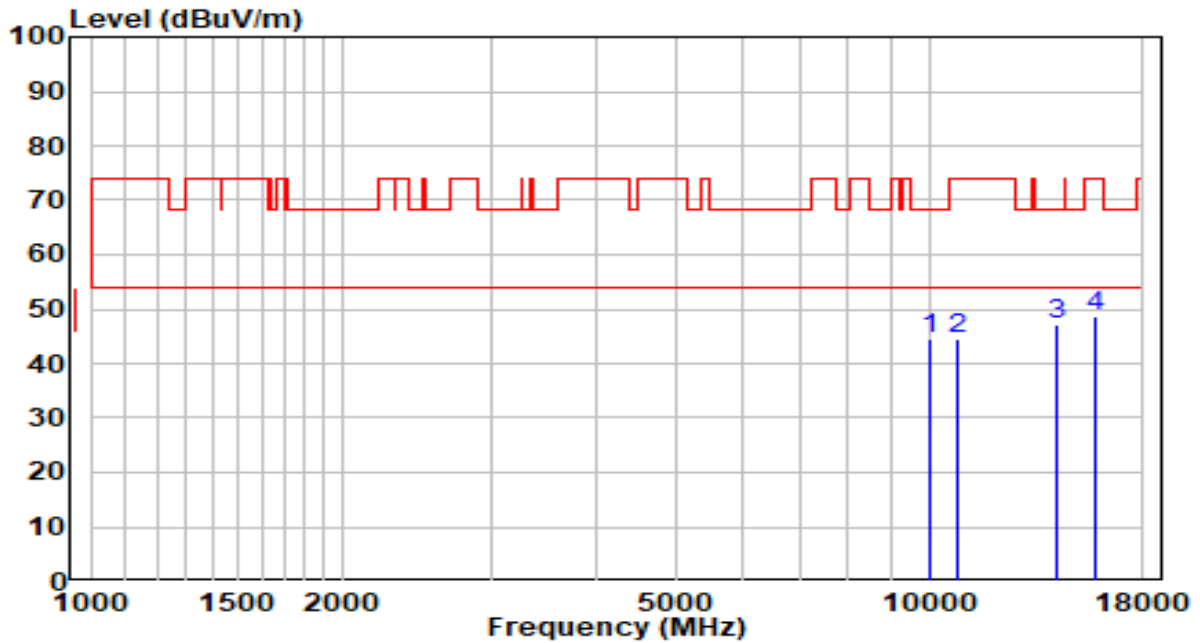


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10035.500	27.91	16.70	44.61	-23.59	68.20	Peak
2	10800.500	25.35	19.00	44.35	-29.65	74.00	Peak
3	* 14175.000	24.71	22.43	47.14	-21.06	68.20	Peak
4	15832.500	27.97	20.53	48.50	-25.50	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	120V/60Hz

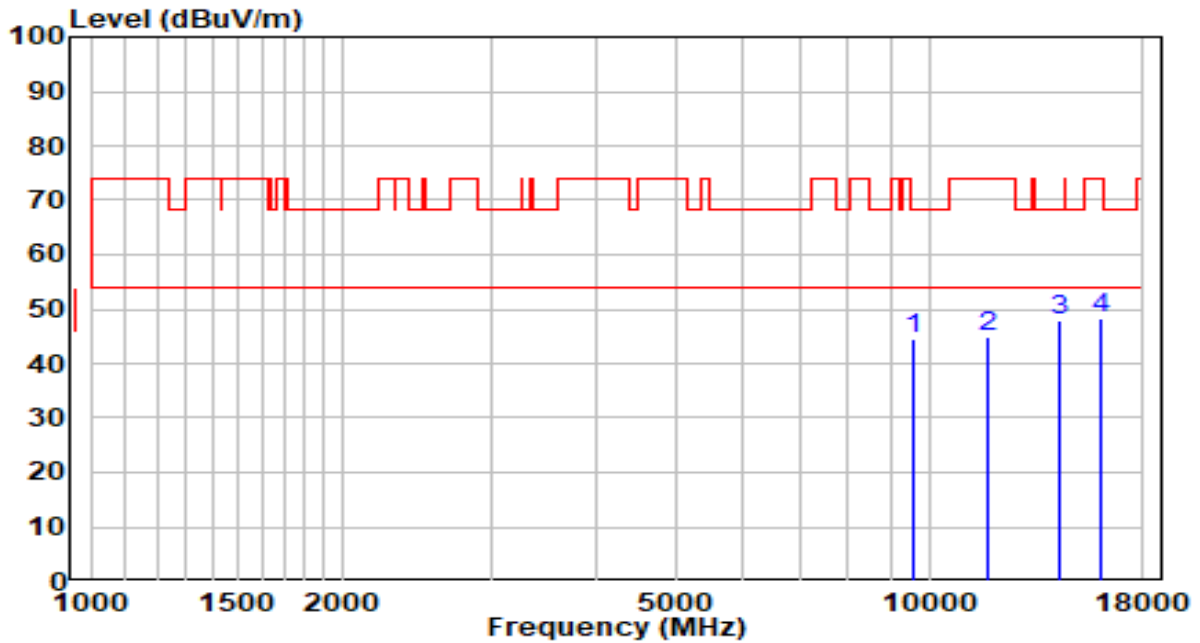


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9559.500	28.73	15.82	44.55	-23.65	68.20	Peak
2	11718.500	25.23	19.56	44.79	-29.21	74.00	Peak
3	* 14302.500	25.48	22.44	47.93	-20.27	68.20	Peak
4	16079.000	28.06	20.29	48.35	-25.65	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	120V/60Hz

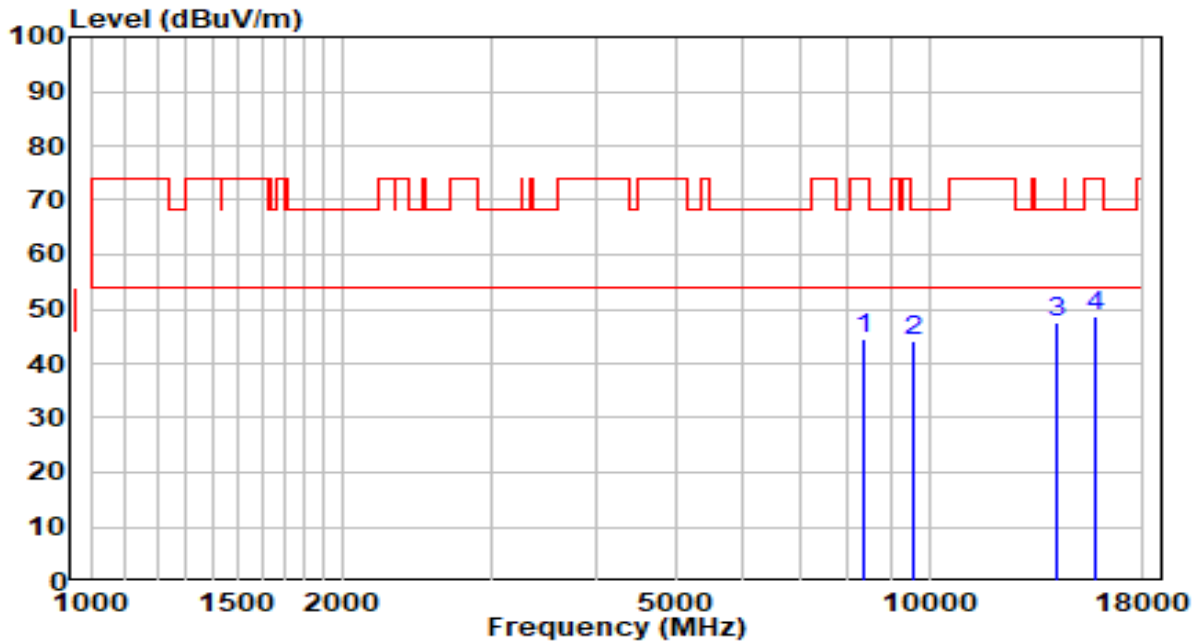


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8361.000	31.09	13.59	44.68	-29.32	74.00	Peak
2	9602.000	28.09	15.89	43.98	-24.22	68.20	Peak
3	* 14158.000	25.21	22.43	47.64	-20.56	68.20	Peak
4	15824.000	28.29	20.55	48.84	-25.16	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	120V/60Hz

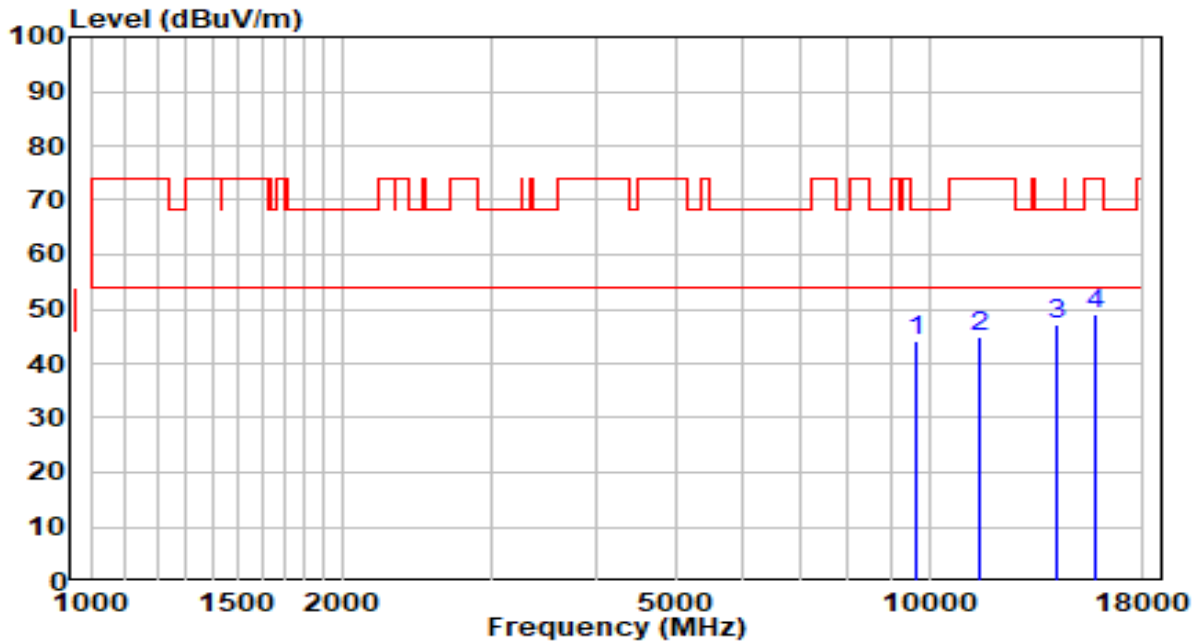


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9627.500	28.06	15.93	43.99	-24.21	68.20	Peak
2	11489.000	25.05	20.03	45.08	-28.92	74.00	Peak
3	* 14226.000	24.79	22.44	47.23	-20.97	68.20	Peak
4	15756.000	28.45	20.72	49.17	-24.83	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	120V/60Hz

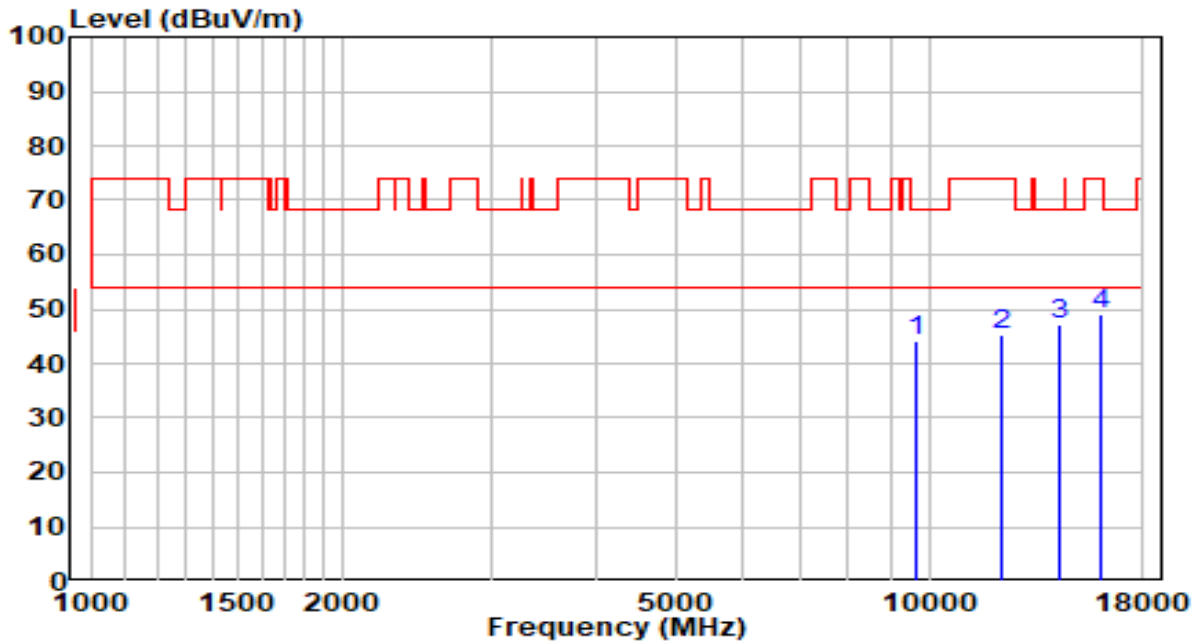


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9670.000	28.03	16.01	44.04	-24.16	68.20	Peak
2	12186.000	26.40	18.73	45.13	-28.87	74.00	Peak
3	* 14336.500	24.65	22.44	47.10	-21.10	68.20	Peak
4	16062.000	28.89	20.25	49.14	-24.86	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz	Test Voltage	120V/60Hz

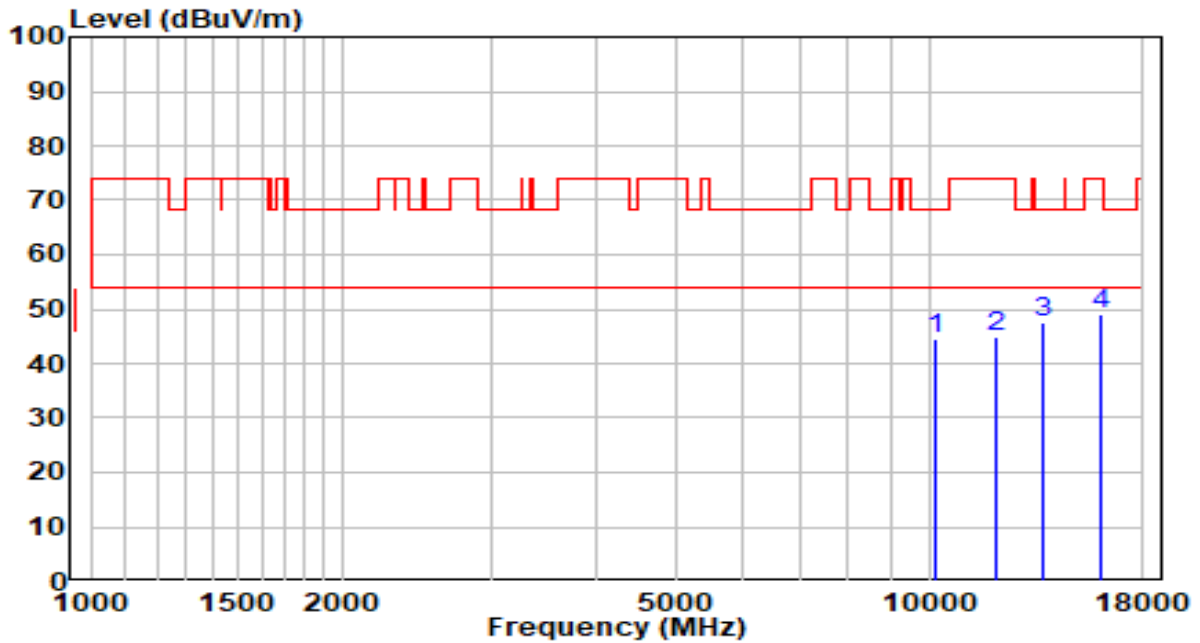


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10188.500	27.03	17.32	44.35	-23.85	68.20	Peak
2	12007.500	25.93	18.91	44.84	-29.16	74.00	Peak
3	* 13648.000	25.46	22.02	47.48	-20.72	68.20	Peak
4	15968.500	28.73	20.19	48.92	-25.08	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz	Test Voltage	120V/60Hz

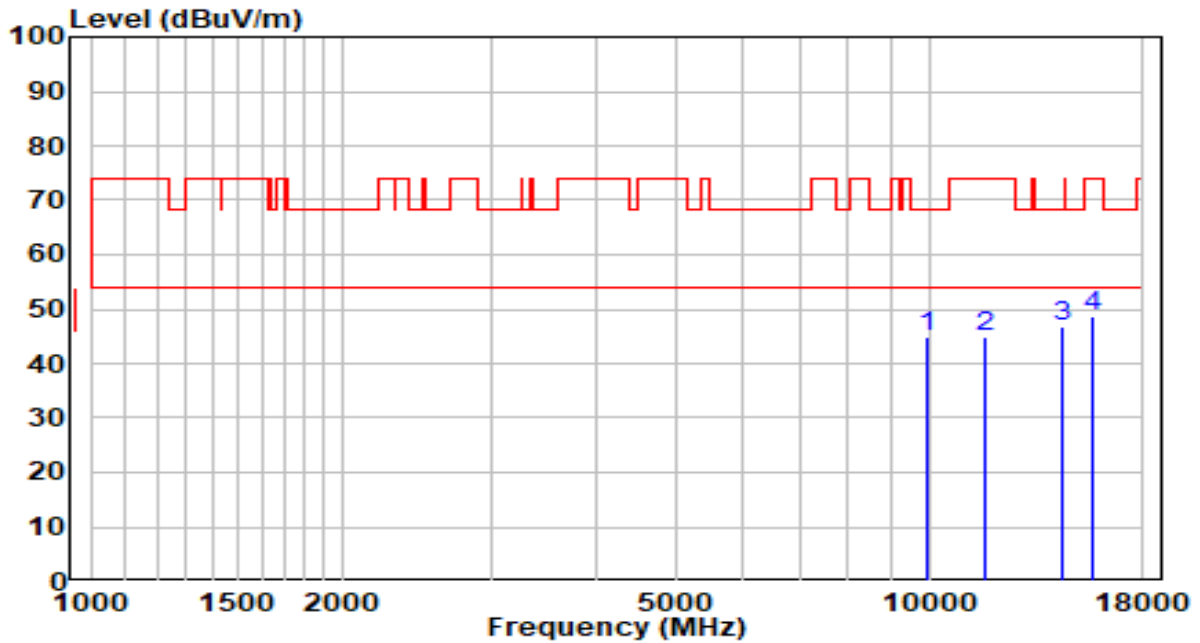


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9933.500	28.64	16.45	45.09	-23.11	68.20	Peak
2	11633.500	25.13	19.75	44.88	-29.12	74.00	Peak
3	* 14362.000	24.53	22.45	46.97	-21.23	68.20	Peak
4	15696.500	27.89	20.86	48.75	-25.25	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5270MHz	Test Voltage	120V/60Hz

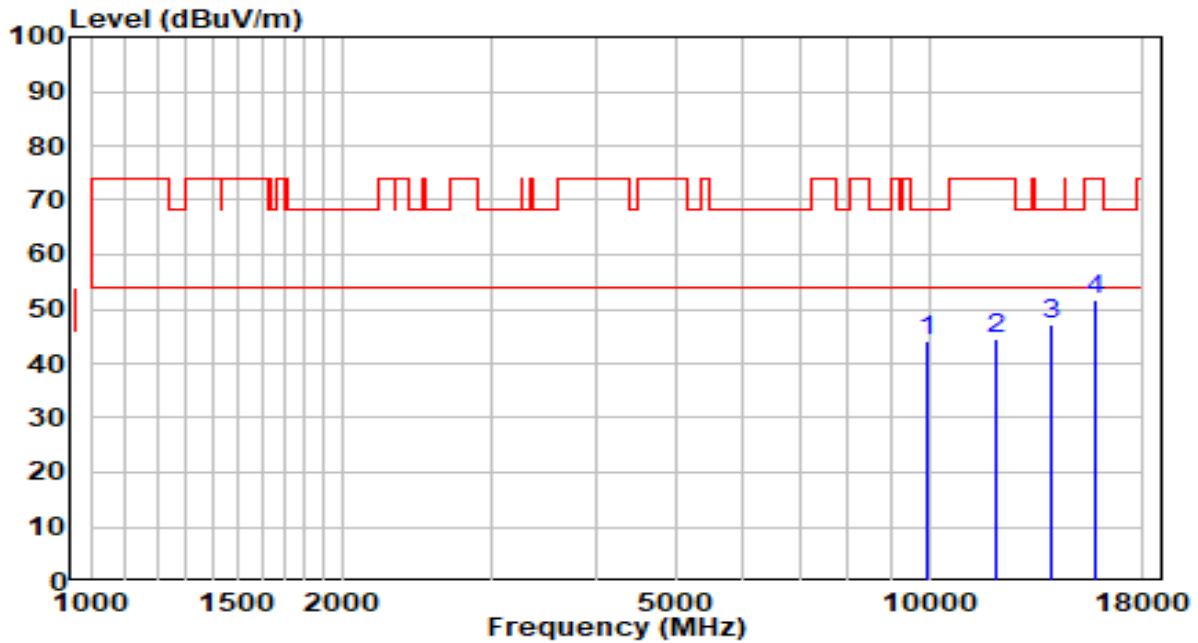


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9959.000	27.70	16.49	44.20	-24.00	68.20	Peak
2	11999.000	25.64	18.92	44.56	-29.44	74.00	Peak
3	* 13996.500	24.90	22.42	47.31	-20.89	68.20	Peak
4	15815.500	31.15	20.57	51.72	-22.28	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5270MHz	Test Voltage	120V/60Hz

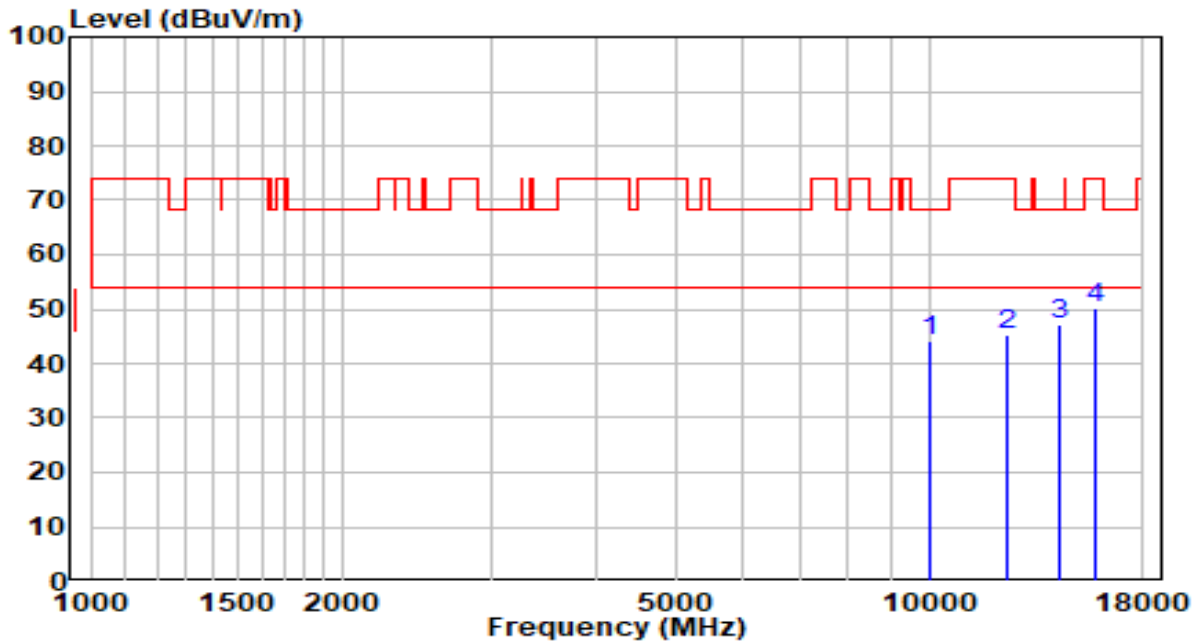


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10052.500	27.55	16.77	44.32	-23.88	68.20	Peak
2	12415.500	26.65	18.49	45.14	-28.86	74.00	Peak
3	* 14353.500	24.90	22.44	47.34	-20.86	68.20	Peak
4	15815.500	29.69	20.57	50.26	-23.74	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	120V/60Hz

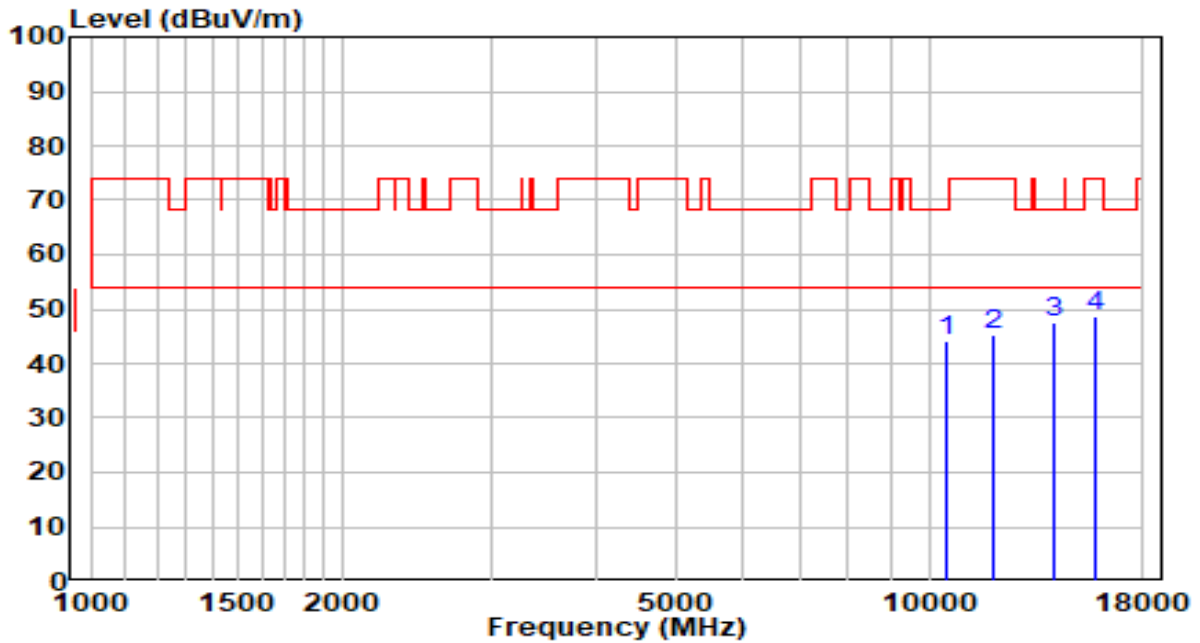


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10469.000	25.66	18.45	44.10	-24.10	68.20	Peak
2	11948.000	26.06	19.04	45.10	-28.90	74.00	Peak
3	* 14132.500	25.01	22.43	47.44	-20.76	68.20	Peak
4	15781.500	27.93	20.65	48.58	-25.42	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	120V/60Hz

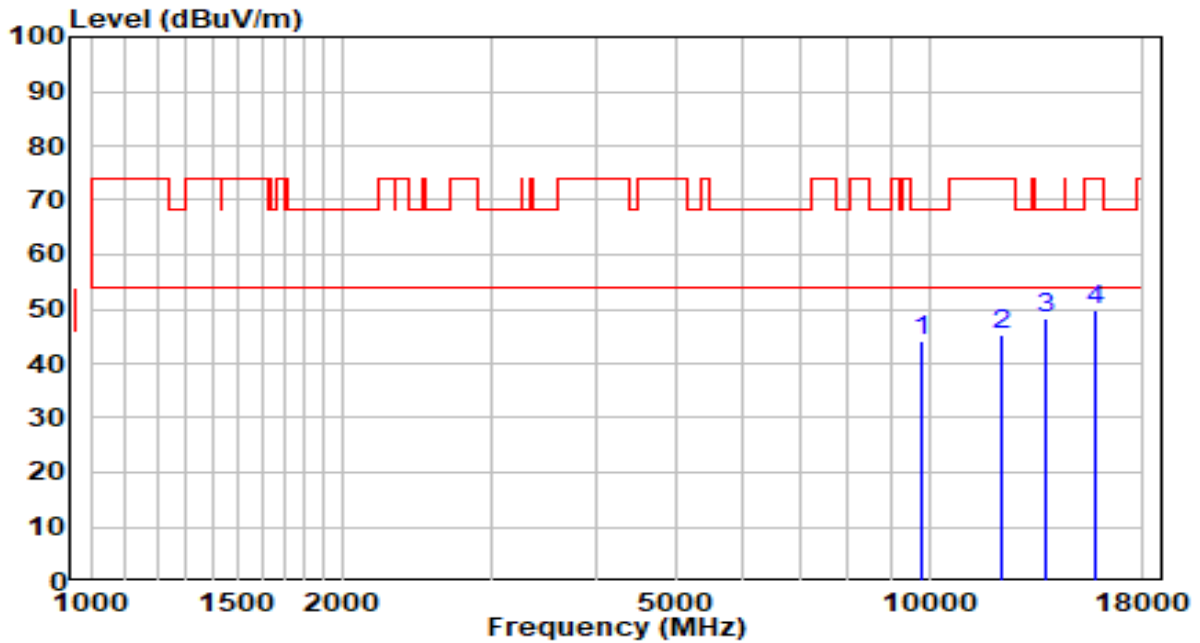


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9780.500	27.91	16.19	44.11	-24.09	68.20	Peak
2	12177.500	26.38	18.74	45.12	-28.88	74.00	Peak
3	* 13818.000	26.00	22.21	48.21	-19.99	68.20	Peak
4	15756.000	29.25	20.72	49.97	-24.03	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	120V/60Hz

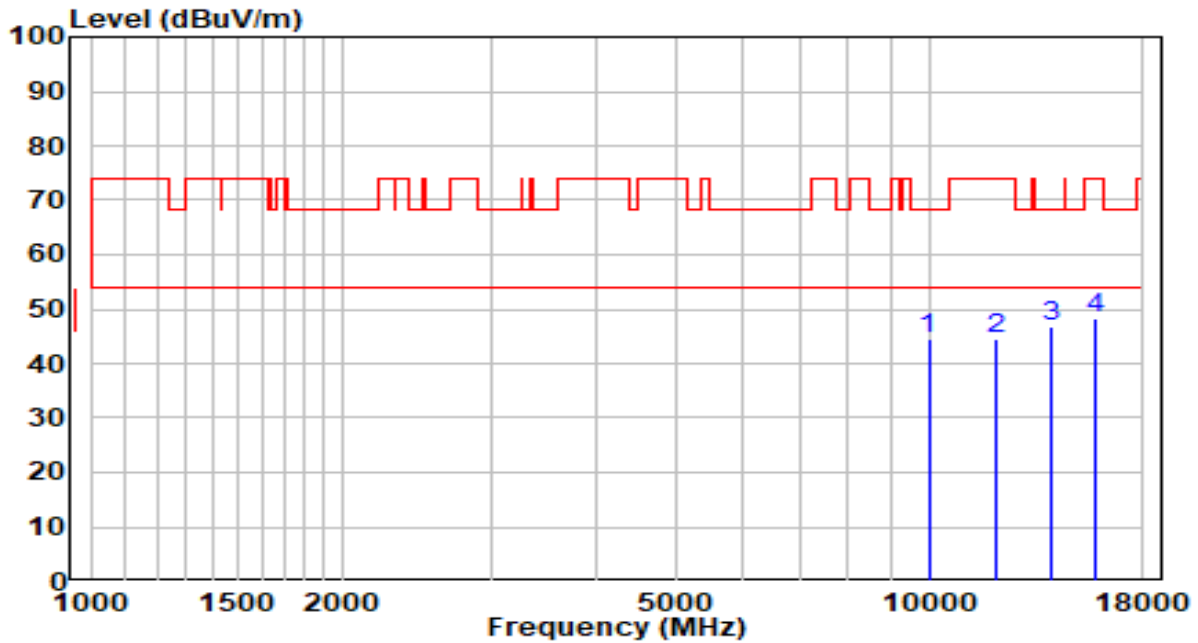


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9984.500	28.01	16.53	44.54	-23.66	68.20	Peak
2	11990.500	25.48	18.94	44.42	-29.58	74.00	Peak
3	* 14013.500	24.21	22.42	46.63	-21.57	68.20	Peak
4	15824.000	27.86	20.55	48.41	-25.59	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	120V/60Hz

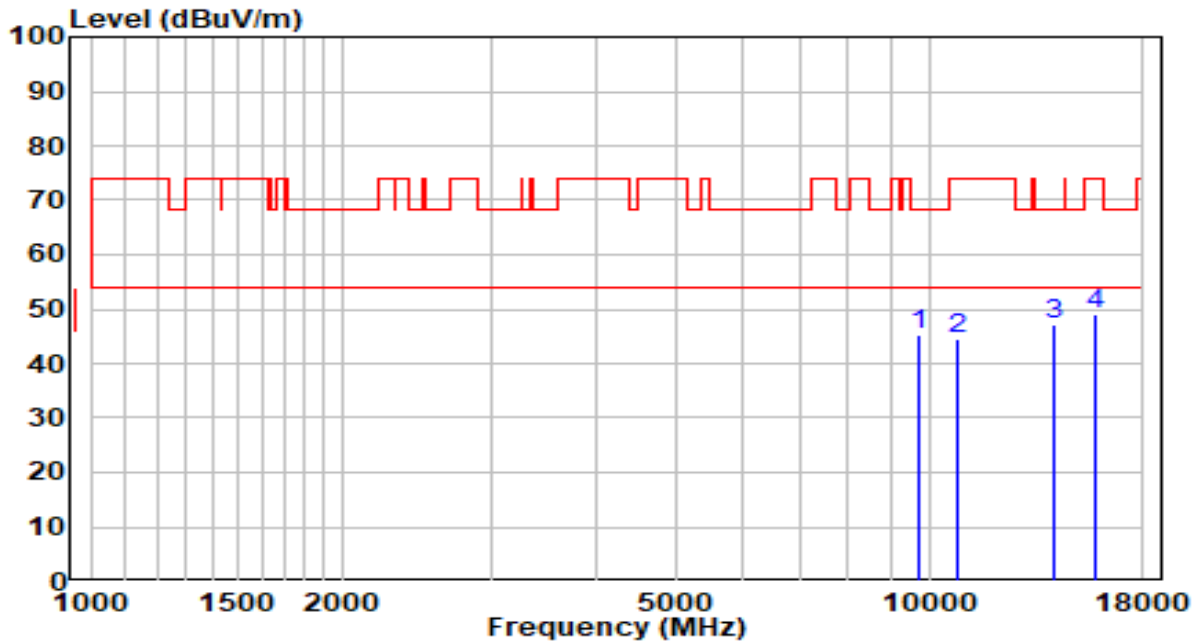


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9755.000	28.97	16.15	45.12	-23.08	68.20	Peak
2	10809.000	25.63	19.01	44.64	-29.36	74.00	Peak
3	* 14132.500	24.84	22.43	47.27	-20.93	68.20	Peak
4	15841.000	28.40	20.50	48.90	-25.10	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5550MHz	Test Voltage	120V/60Hz

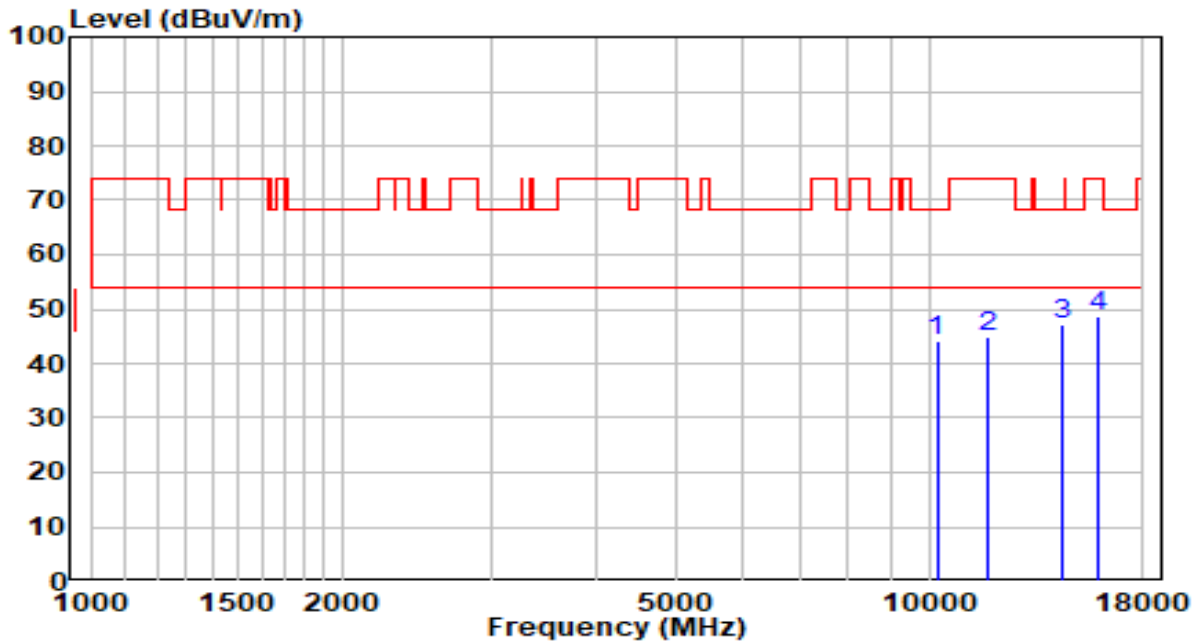


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10214.000	26.91	17.42	44.33	-23.87	68.20	Peak
2	11718.500	25.25	19.56	44.81	-29.19	74.00	Peak
3	* 14413.000	24.85	22.45	47.30	-20.90	68.20	Peak
4	15909.000	28.26	20.34	48.60	-25.40	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5550MHz	Test Voltage	120V/60Hz

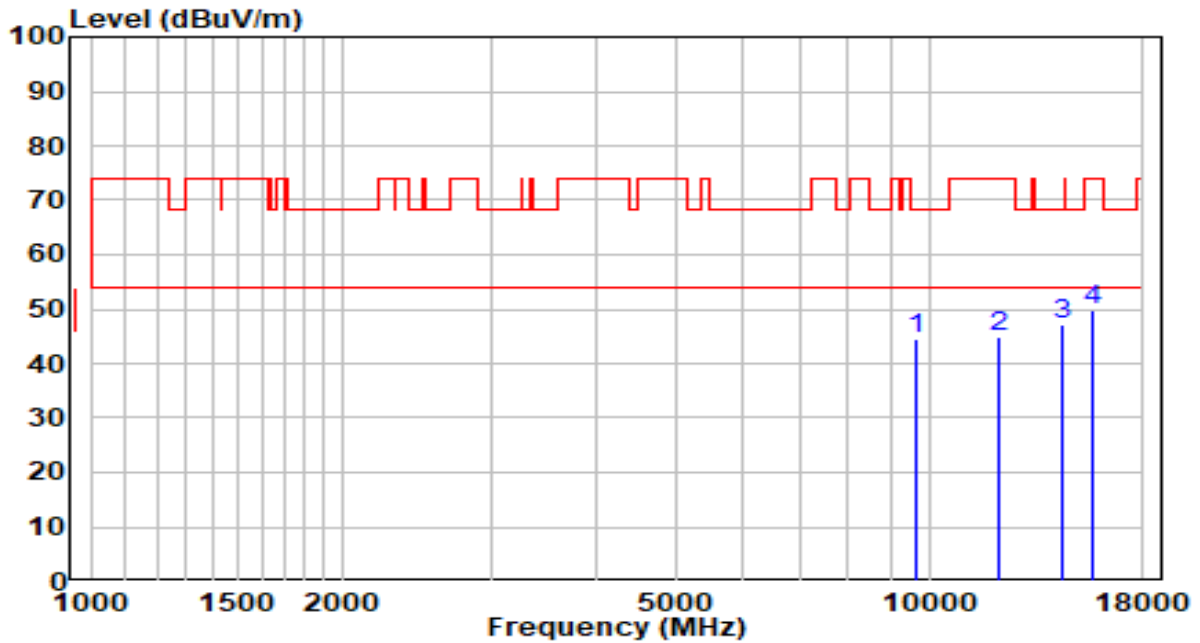


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9653.000	28.66	15.98	44.64	-23.56	68.20	Peak
2	12092.500	26.11	18.82	44.93	-29.07	74.00	Peak
3	* 14396.000	24.63	22.45	47.08	-21.12	68.20	Peak
4	15705.000	28.81	20.84	49.65	-24.35	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	120V/60Hz

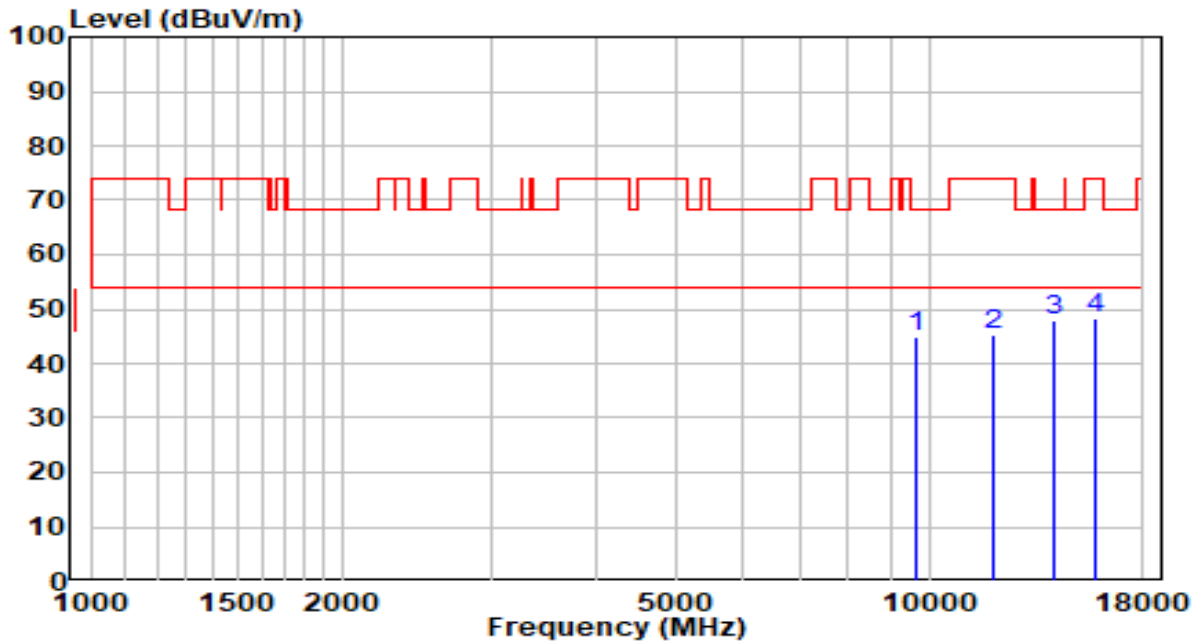


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9670.000	28.92	16.01	44.93	-23.27	68.20	Peak
2	11905.500	26.17	19.13	45.30	-28.70	74.00	Peak
3	* 14141.000	25.55	22.43	47.98	-20.22	68.20	Peak
4	15832.500	27.86	20.53	48.39	-25.61	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	120V/60Hz

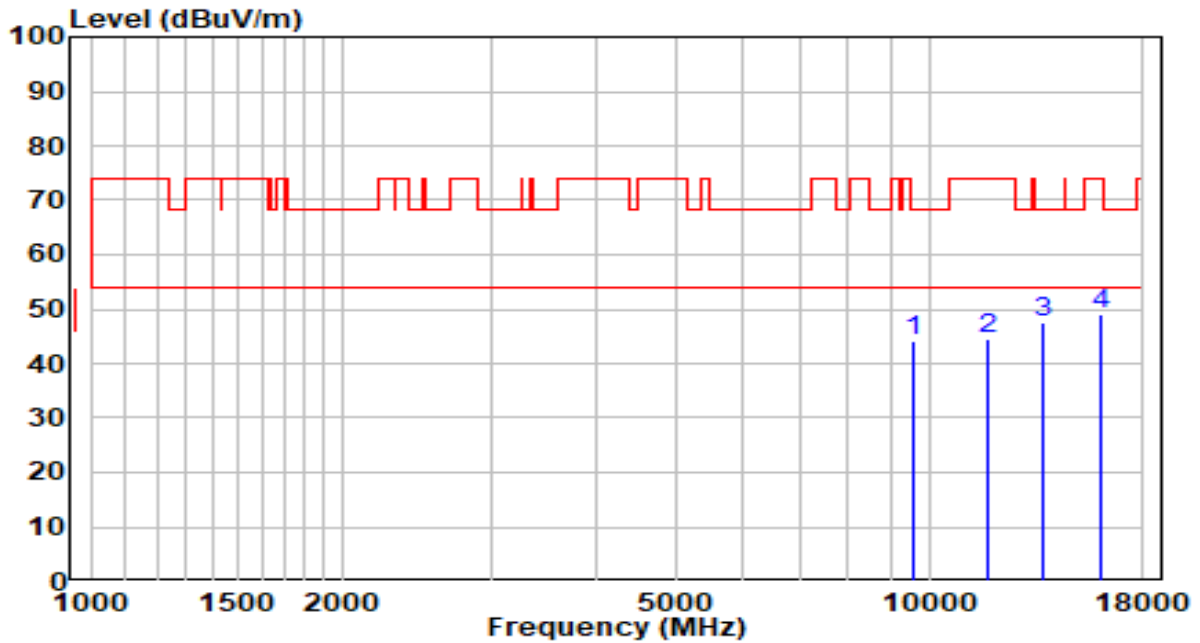


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9576.500	28.31	15.85	44.16	-24.04	68.20	Peak
2	11786.500	25.31	19.40	44.71	-29.29	74.00	Peak
3	* 13656.500	25.59	22.03	47.62	-20.58	68.20	Peak
4	16062.000	28.69	20.25	48.94	-25.06	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5710MHz	Test Voltage	120V/60Hz

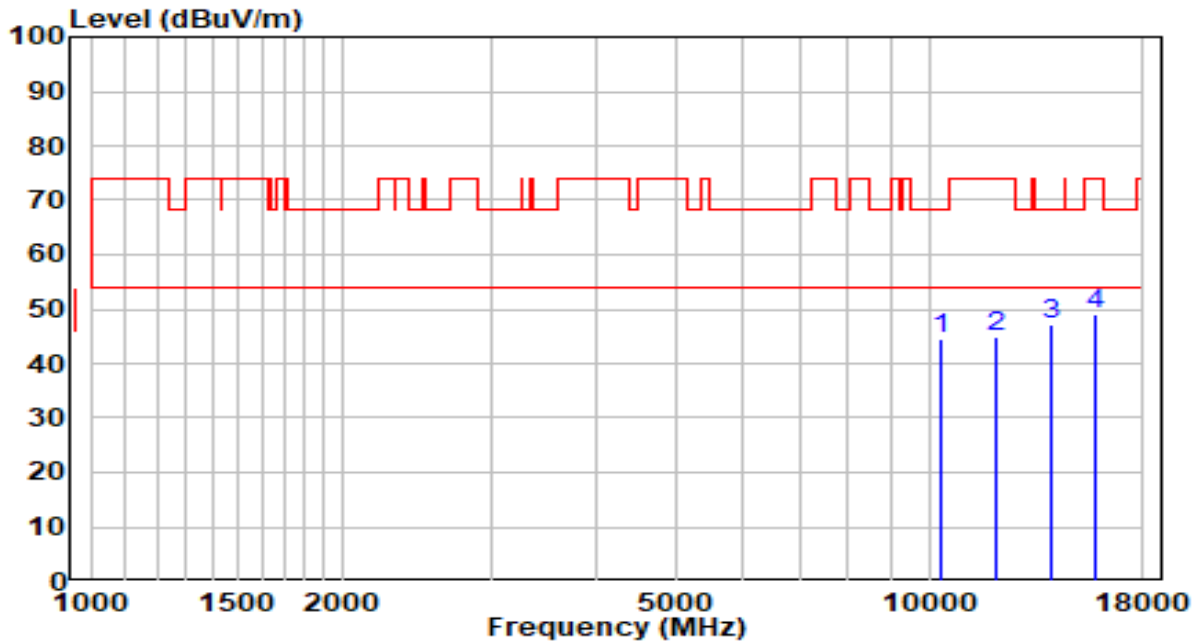


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10307.500	26.67	17.80	44.47	-23.73	68.20	Peak
2	12041.500	25.87	18.88	44.75	-29.25	74.00	Peak
3	* 13954.000	24.87	22.37	47.24	-20.96	68.20	Peak
4	15824.000	28.36	20.55	48.91	-25.09	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5710MHz	Test Voltage	120V/60Hz

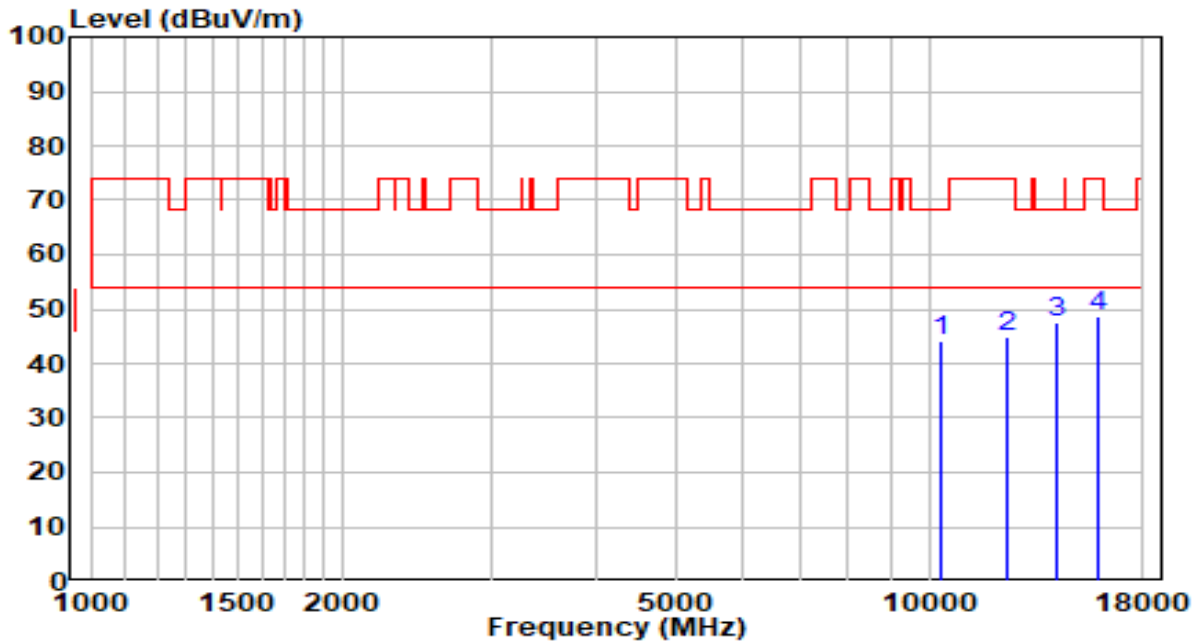


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10350.000	26.24	17.97	44.21	-23.99	68.20	Peak
2	12407.000	26.38	18.50	44.88	-29.12	74.00	Peak
3	* 14166.500	25.15	22.43	47.58	-20.62	68.20	Peak
4	15849.500	28.12	20.48	48.60	-25.40	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	120V/60Hz

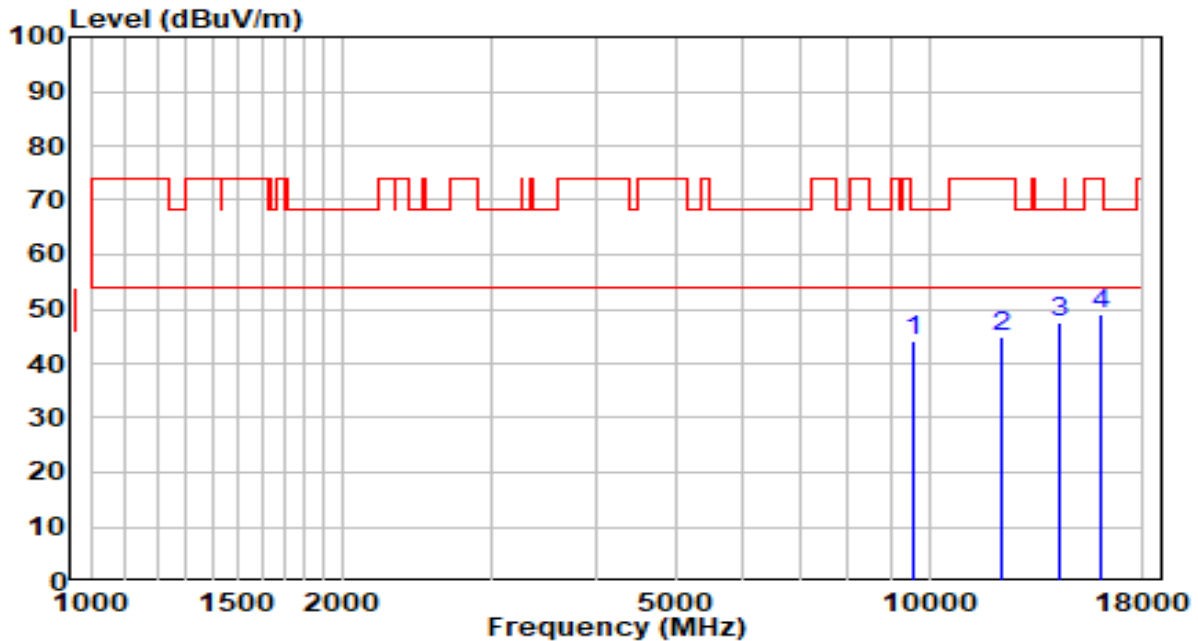


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9568.000	28.32	15.83	44.15	-24.05	68.20	Peak
2	12160.500	26.27	18.75	45.02	-28.98	74.00	Peak
3	* 14294.000	24.94	22.44	47.38	-20.82	68.20	Peak
4	16062.000	28.81	20.25	49.06	-24.94	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	120V/60Hz

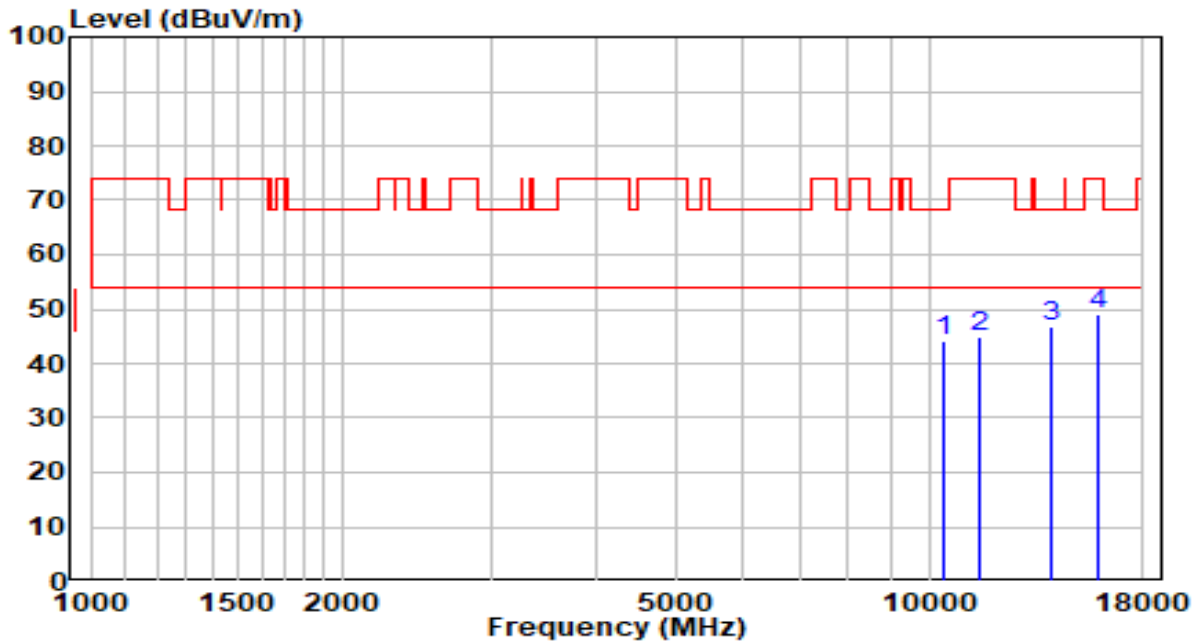


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10401.000	26.16	18.17	44.33	-23.87	68.20	Peak
2	11480.500	24.77	20.02	44.79	-29.21	74.00	Peak
3	* 14013.500	24.42	22.42	46.84	-21.36	68.20	Peak
4	15909.000	28.64	20.34	48.98	-25.02	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	120V/60Hz

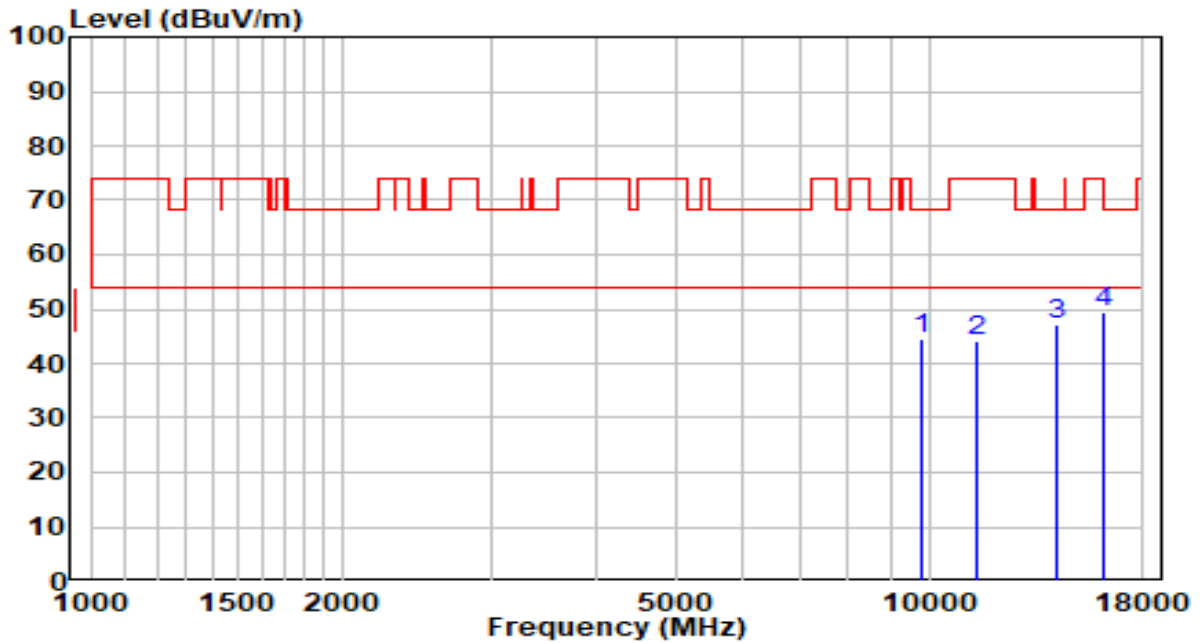


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9780.500	28.39	16.19	44.58	-23.62	68.20	Peak
2	11395.500	24.19	19.89	44.08	-29.92	74.00	Peak
3	* 14200.500	24.90	22.43	47.33	-20.87	68.20	Peak
4	16121.500	29.21	20.39	49.60	-24.40	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	120V/60Hz

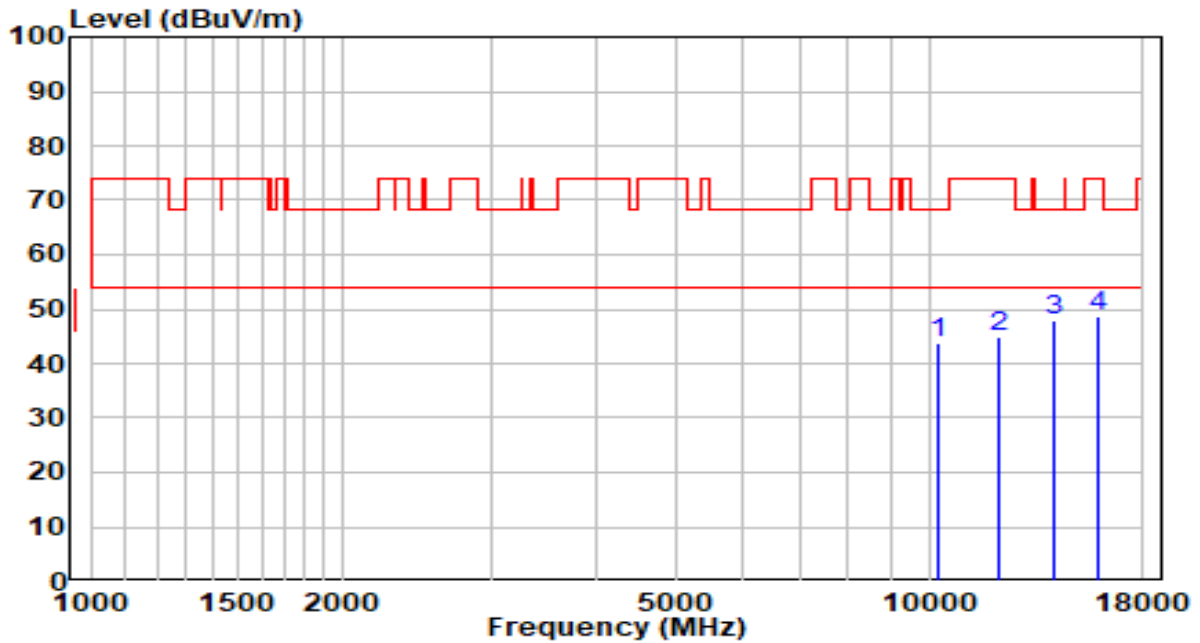


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10273.500	26.26	17.66	43.92	-24.28	68.20	Peak
2	12143.500	26.19	18.77	44.96	-29.04	74.00	Peak
3	* 14141.000	25.67	22.43	48.10	-20.10	68.20	Peak
4	15849.500	28.21	20.48	48.69	-25.31	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

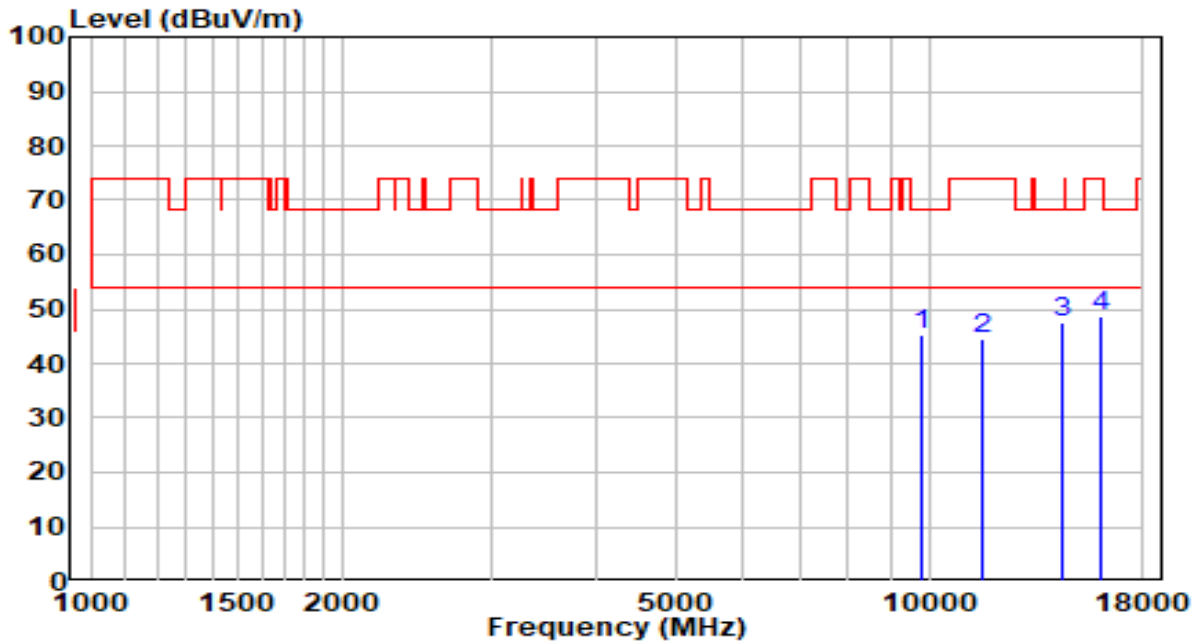


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9763.500	29.14	16.16	45.31	-22.89	68.20	Peak
2	11574.000	24.73	19.88	44.61	-29.39	74.00	Peak
3	* 14362.000	25.07	22.45	47.51	-20.69	68.20	Peak
4	16070.500	28.36	20.27	48.63	-25.37	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

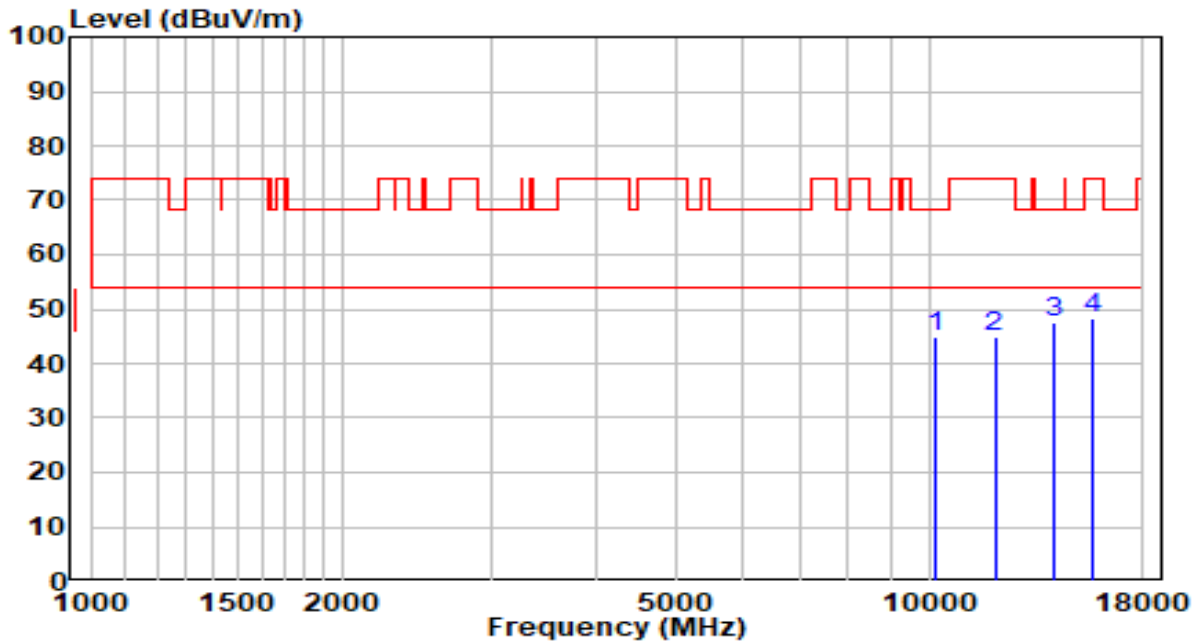


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10197.000	27.42	17.35	44.77	-23.43	68.20	Peak
2	11973.500	26.04	18.98	45.02	-28.98	74.00	Peak
3	* 14124.000	25.13	22.43	47.56	-20.64	68.20	Peak
4	15637.000	27.47	21.01	48.48	-25.52	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	120V/60Hz

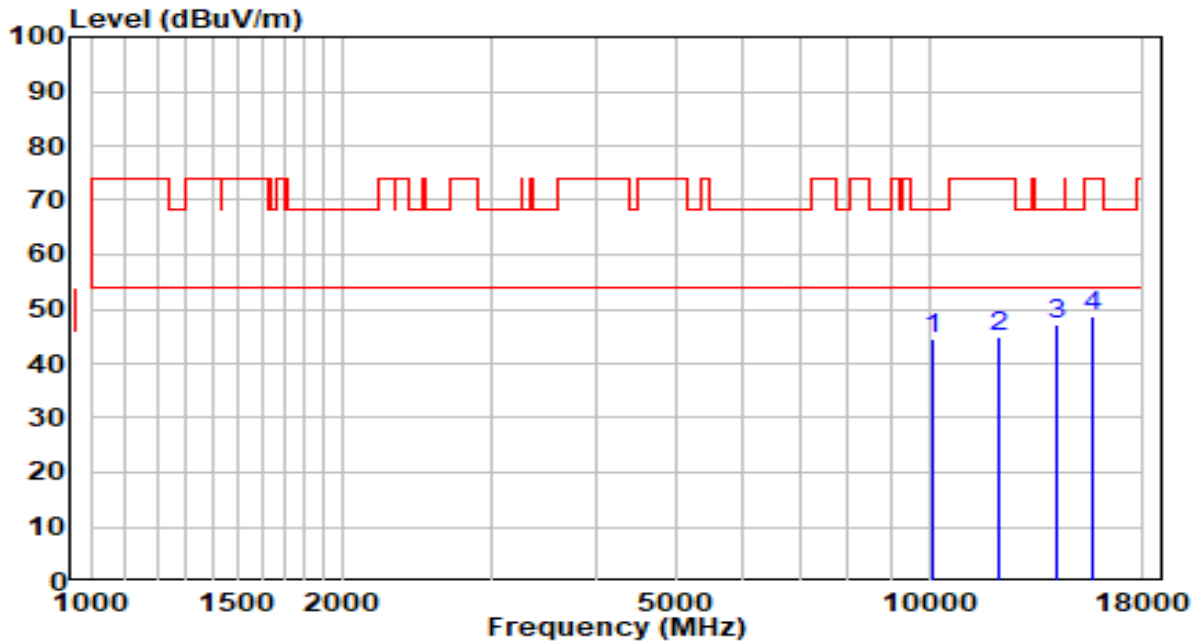


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10103.500	27.43	16.98	44.41	-23.79	68.20	Peak
2	12092.500	26.24	18.82	45.06	-28.94	74.00	Peak
3	* 14166.500	24.60	22.43	47.03	-21.17	68.20	Peak
4	15722.000	28.05	20.80	48.85	-25.15	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	120V/60Hz

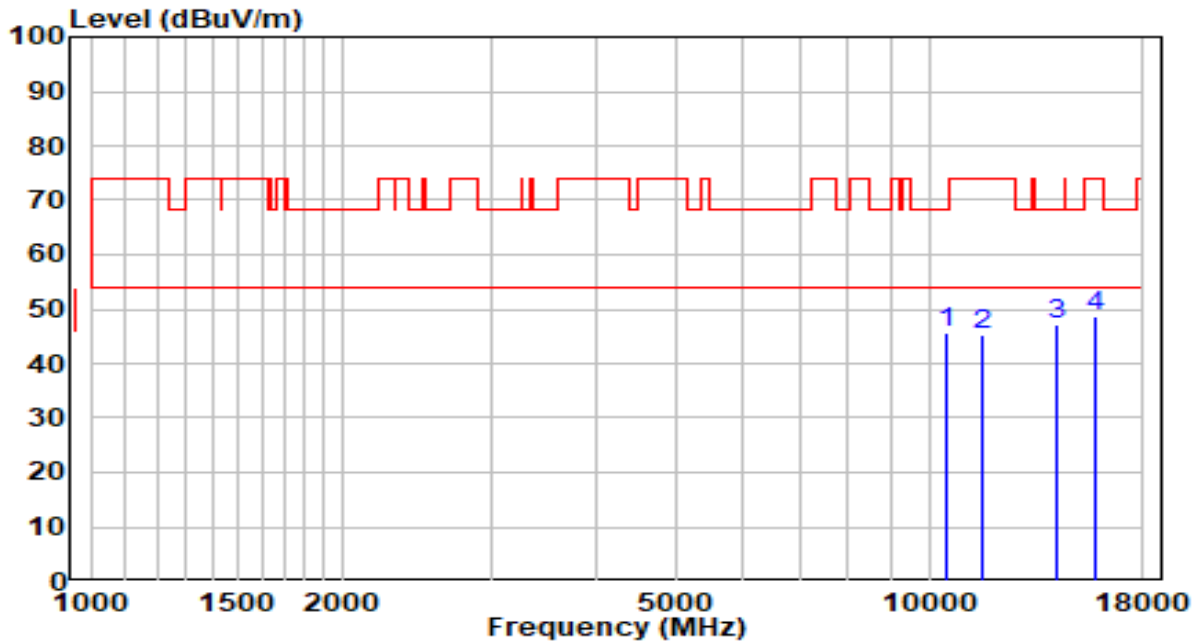


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10477.500	27.14	18.48	45.62	-22.58	68.20	Peak
2	11557.000	25.37	19.92	45.29	-28.71	74.00	Peak
3	* 14217.500	24.69	22.44	47.12	-21.08	68.20	Peak
4	15841.000	28.18	20.50	48.68	-25.32	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	120V/60Hz

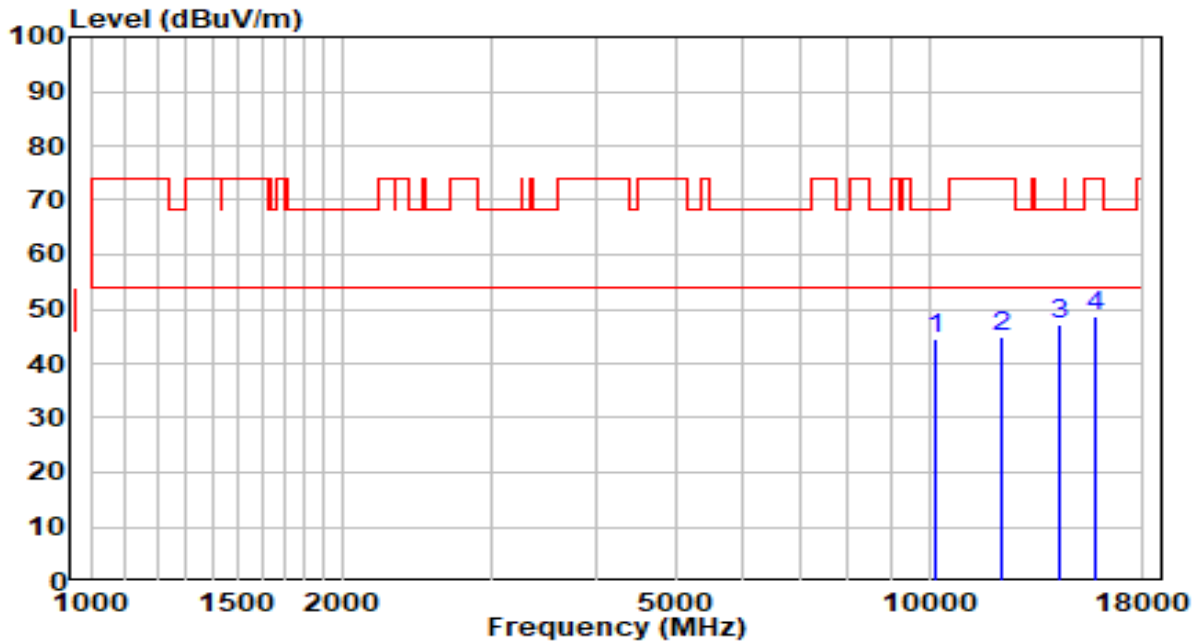


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10154.500	27.35	17.18	44.53	-23.67	68.20	Peak
2	12160.500	26.13	18.75	44.88	-29.12	74.00	Peak
3	* 14328.000	24.77	22.44	47.22	-20.98	68.20	Peak
4	15841.000	28.04	20.50	48.54	-25.46	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	120V/60Hz

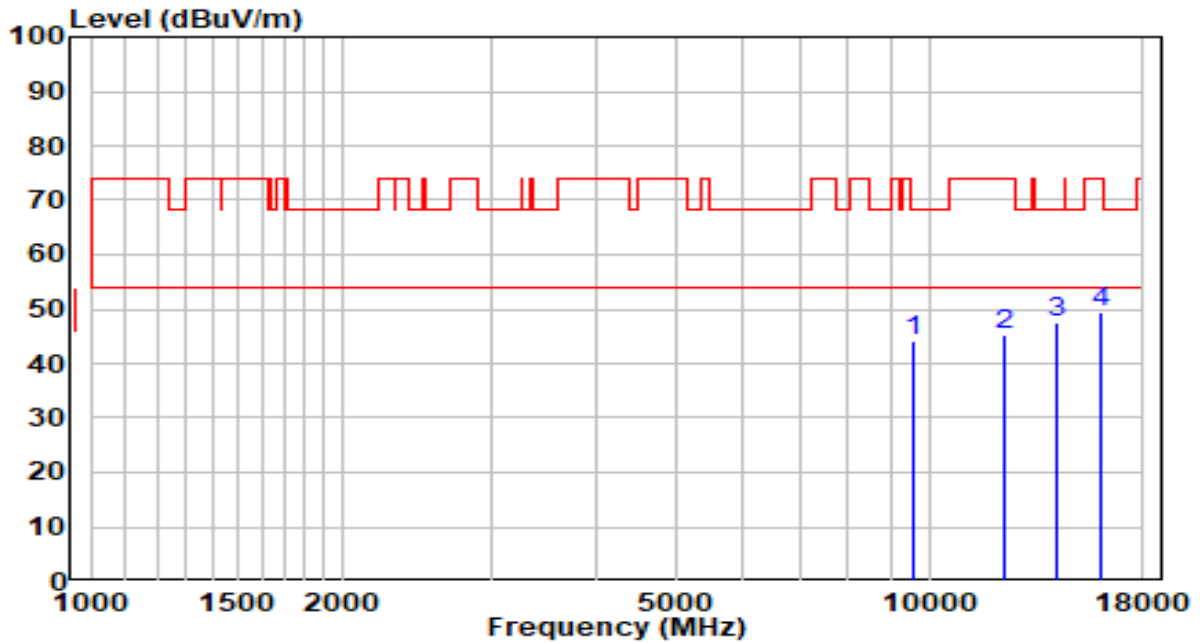


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9568.000	28.31	15.83	44.14	-24.06	68.20	Peak
2	12279.500	26.68	18.63	45.31	-28.69	74.00	Peak
3	* 14192.000	25.09	22.43	47.52	-20.68	68.20	Peak
4	16036.500	29.21	20.19	49.40	-24.60	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz	Test Voltage	120V/60Hz

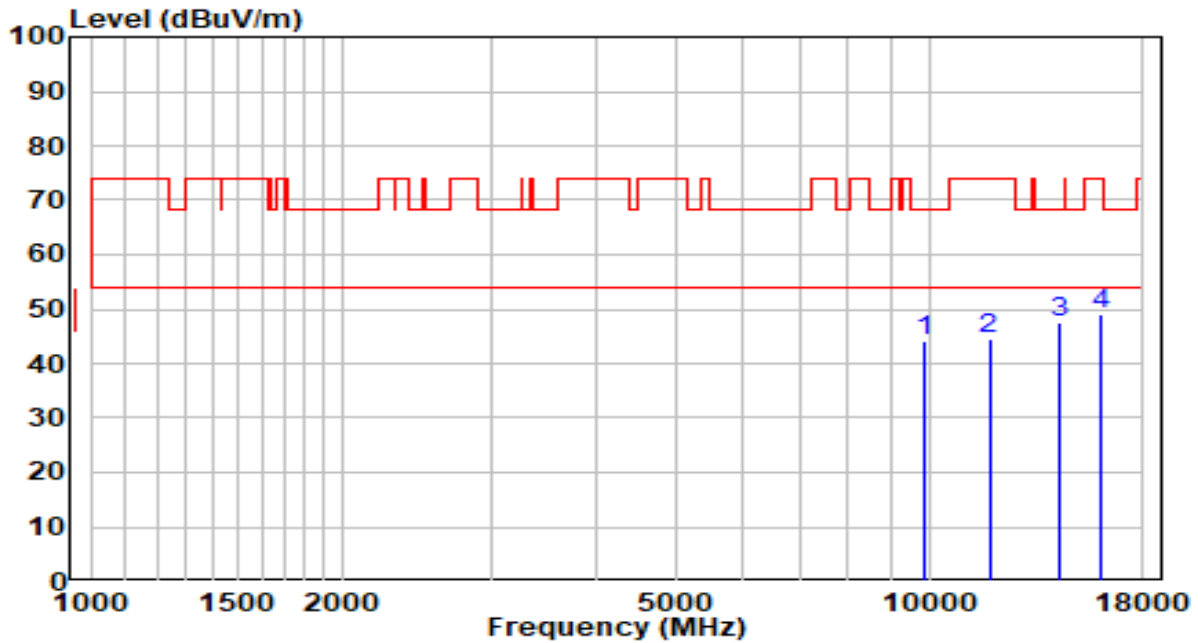


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9848.500	27.72	16.31	44.02	-24.18	68.20	Peak
2	11795.000	25.04	19.38	44.42	-29.58	74.00	Peak
3	* 14294.000	25.21	22.44	47.65	-20.55	68.20	Peak
4	16053.500	28.75	20.23	48.98	-25.02	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz	Test Voltage	120V/60Hz

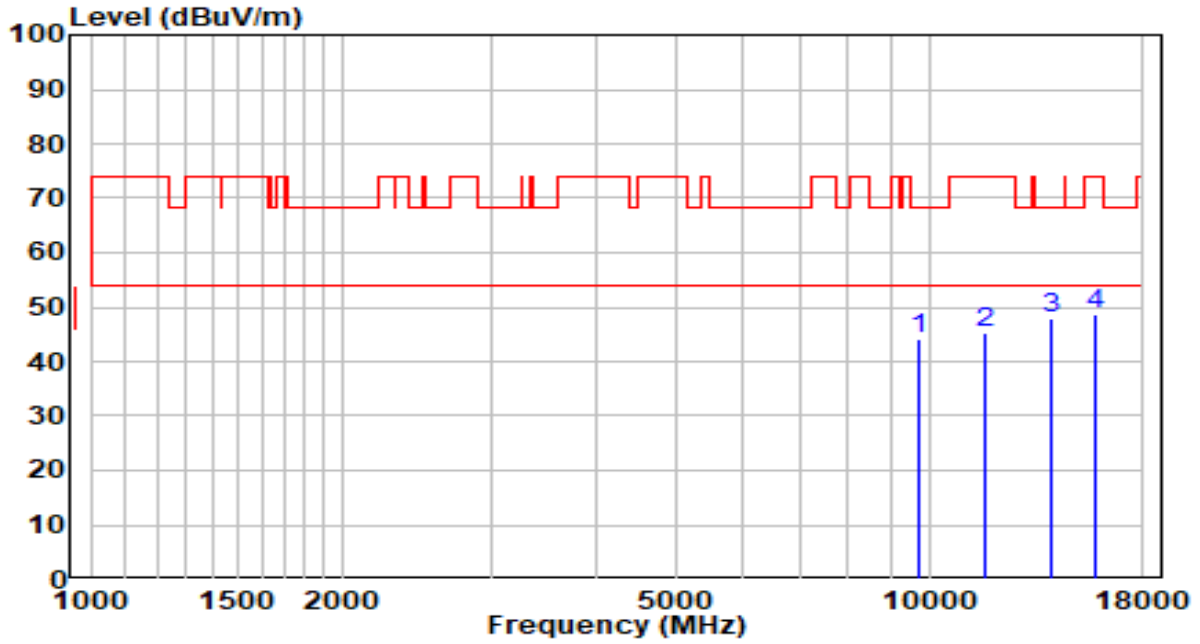


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9721.000	28.08	16.09	44.17	-24.03	68.20	Peak
2	11701.500	25.51	19.59	45.10	-28.90	74.00	Peak
3	* 14013.500	25.34	22.42	47.76	-20.44	68.20	Peak
4	15739.000	28.03	20.76	48.79	-25.21	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5690MHz	Test Voltage	120V/60Hz

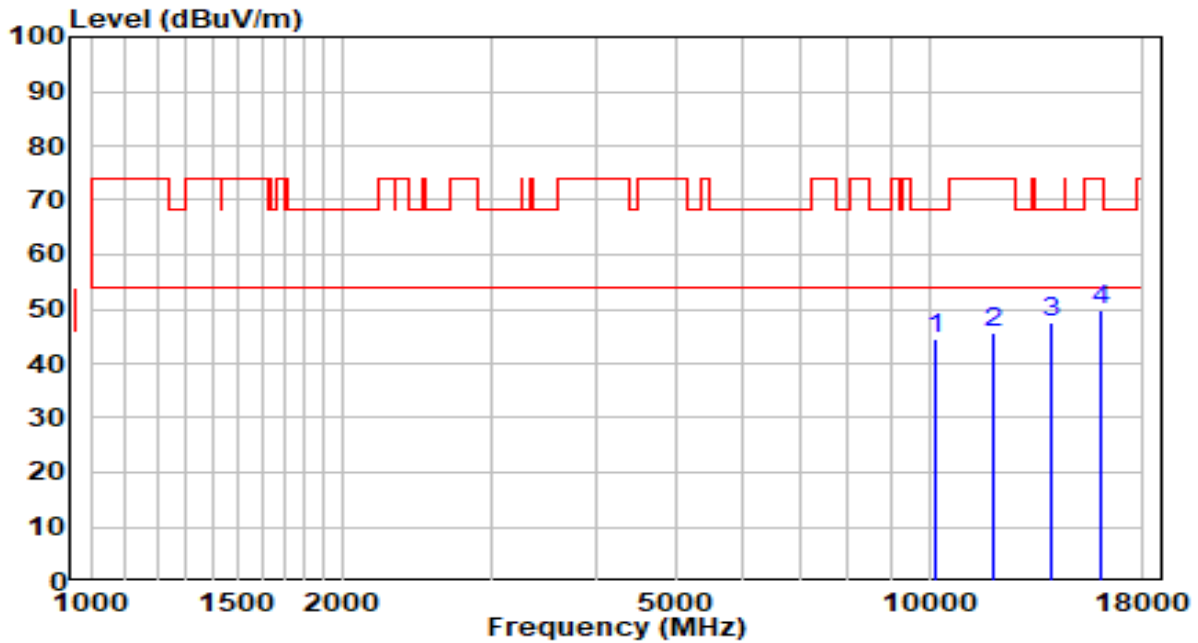


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10205.500	27.21	17.39	44.60	-23.60	68.20	Peak
2	11888.500	26.39	19.17	45.56	-28.44	74.00	Peak
3	* 14030.500	25.20	22.42	47.63	-20.57	68.20	Peak
4	15968.500	29.76	20.19	49.95	-24.05	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5690MHz	Test Voltage	120V/60Hz

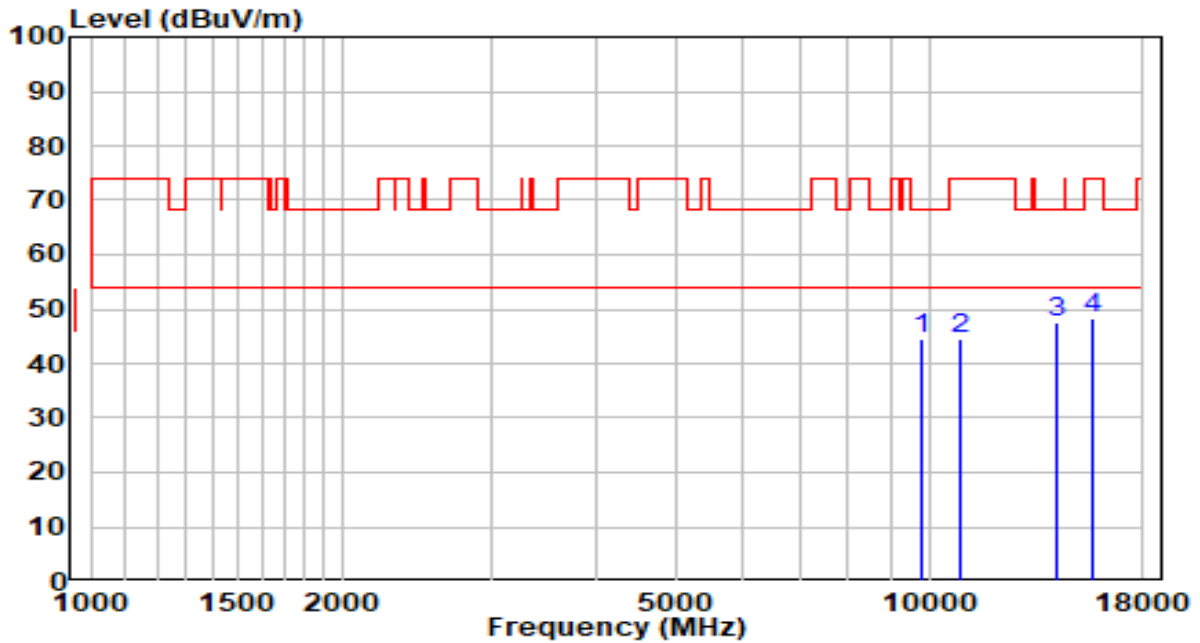


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9789.000	28.32	16.21	44.53	-23.67	68.20	Peak
2	10911.000	25.22	19.15	44.37	-29.63	74.00	Peak
3	* 14158.000	25.05	22.43	47.48	-20.72	68.20	Peak
4	15654.000	27.29	20.97	48.26	-25.74	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	120V/60Hz

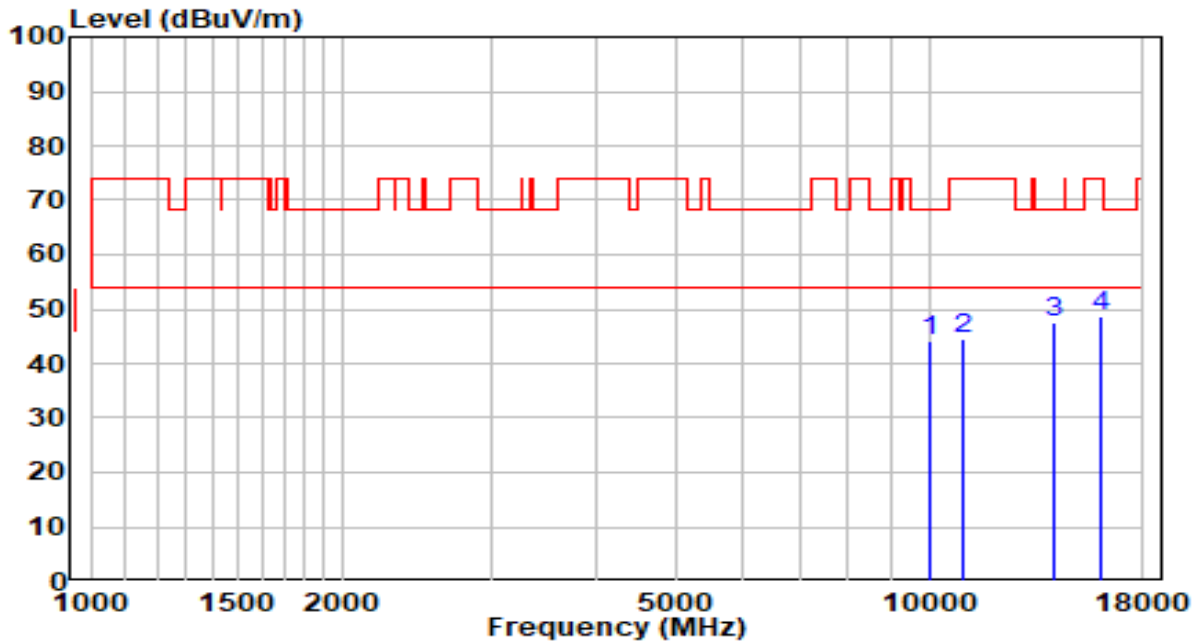


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9993.000	27.72	16.55	44.27	-23.93	68.20	Peak
2	10945.000	25.28	19.20	44.48	-29.52	74.00	Peak
3	* 14073.000	25.13	22.43	47.55	-20.65	68.20	Peak
4	16062.000	28.55	20.25	48.80	-25.20	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	120V/60Hz

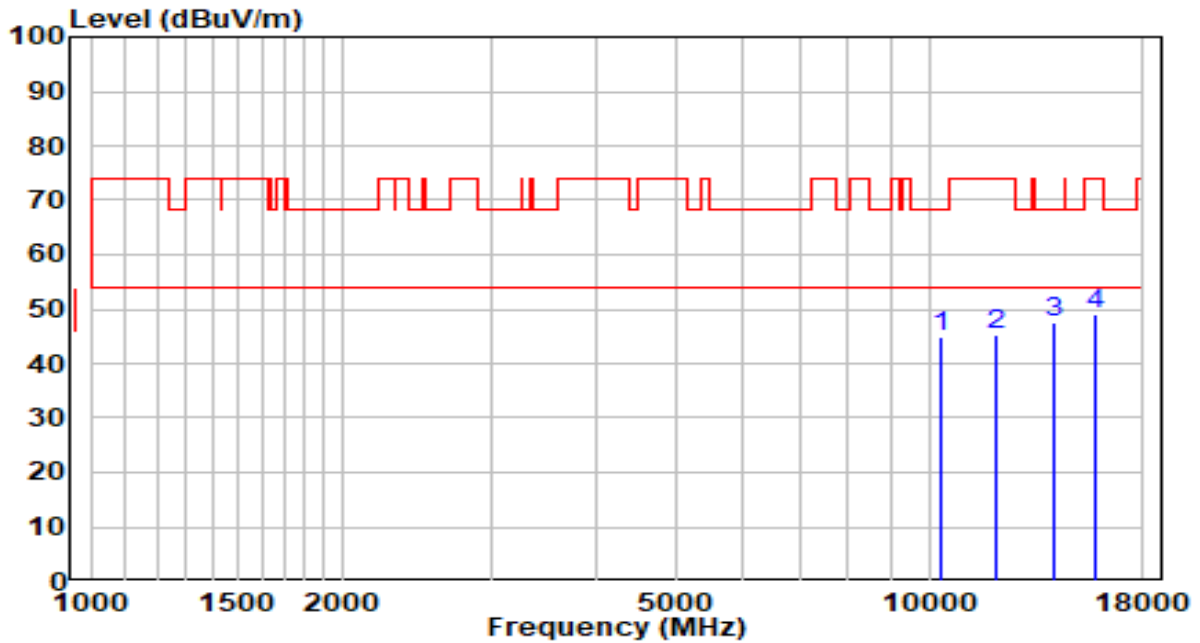


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10358.500	26.99	18.00	44.99	-23.21	68.20	Peak
2	12024.500	26.29	18.89	45.18	-28.82	74.00	Peak
3	* 14124.000	25.06	22.43	47.49	-20.71	68.20	Peak
4	15747.500	28.32	20.74	49.06	-24.94	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-11-17
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	22.9°C /49.5%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE160 at Channel 5250MHz	Test Voltage	120V/60Hz

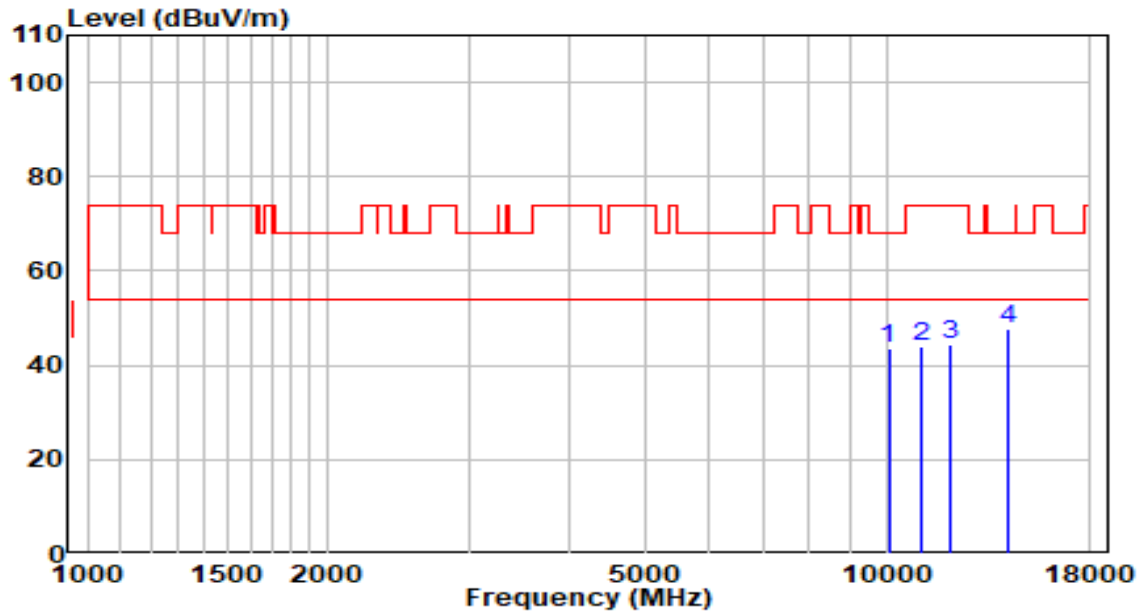


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10061.000	26.86	16.81	43.67	-24.53	68.20	Peak
2	11021.500	24.68	19.31	44.00	-30.00	74.00	Peak
3	12007.500	25.52	18.91	44.43	-29.57	74.00	Peak
4	* 14158.000	25.20	22.43	47.63	-20.57	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-11-17
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	22.9°C /49.5%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE160 at Channel 5250MHz	Test Voltage	120V/60Hz

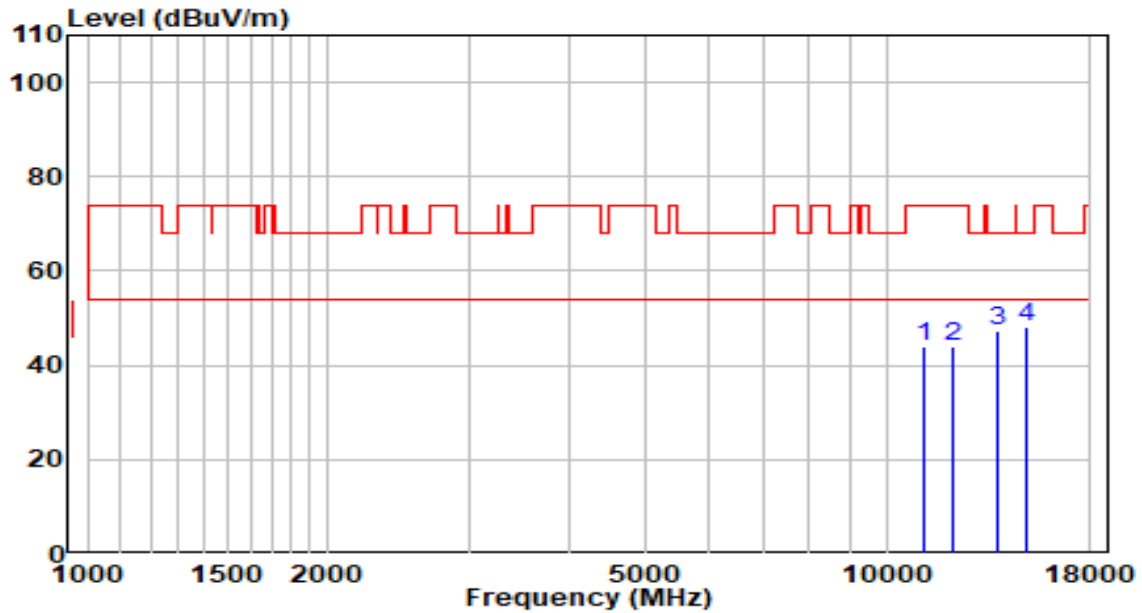


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	11132.000	24.65	19.48	44.14	-29.86	74.00	Peak
2	12101.000	25.26	18.82	44.08	-29.92	74.00	Peak
3	13767.000	24.96	22.16	47.12	-21.08	68.20	Peak
4	* 14931.500	25.84	22.14	47.98	-20.22	68.20	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-11-17
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	22.9°C /49.5%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE160 at Channel 5570MHz	Test Voltage	120V/60Hz

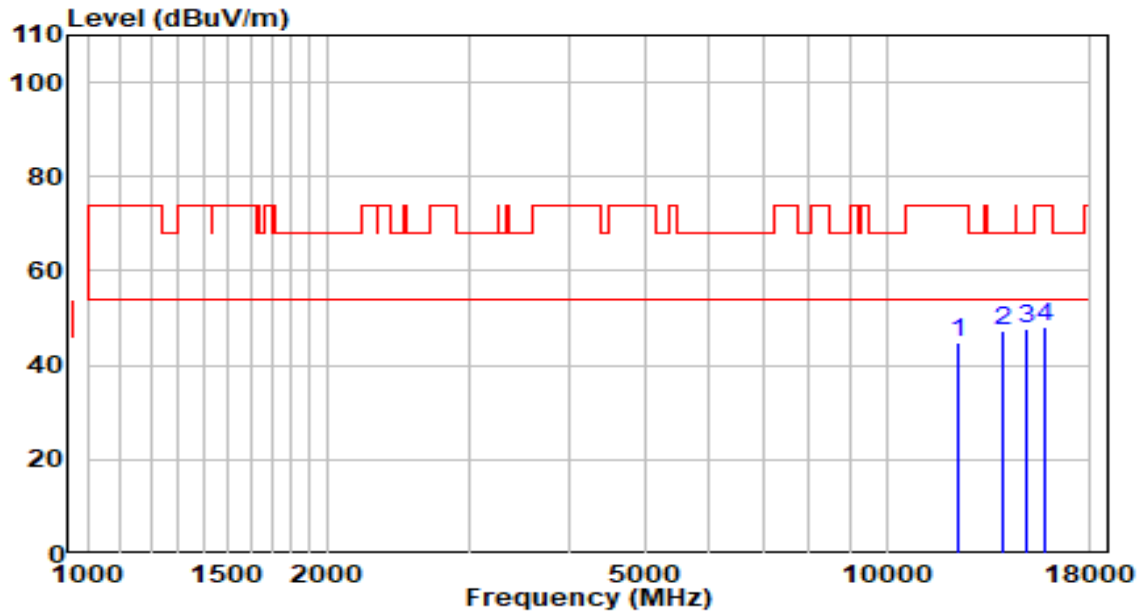


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	12322.000	26.07	18.59	44.66	-29.34	74.00	Peak
2	13971.000	25.09	22.39	47.47	-20.73	68.20	Peak
3	* 14940.000	25.63	22.13	47.76	-20.44	68.20	Peak
4	15815.500	27.40	20.57	47.96	-26.04	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-11-17
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	22.9°C /49.5%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE160 at Channel 5570MHz	Test Voltage	120V/60Hz

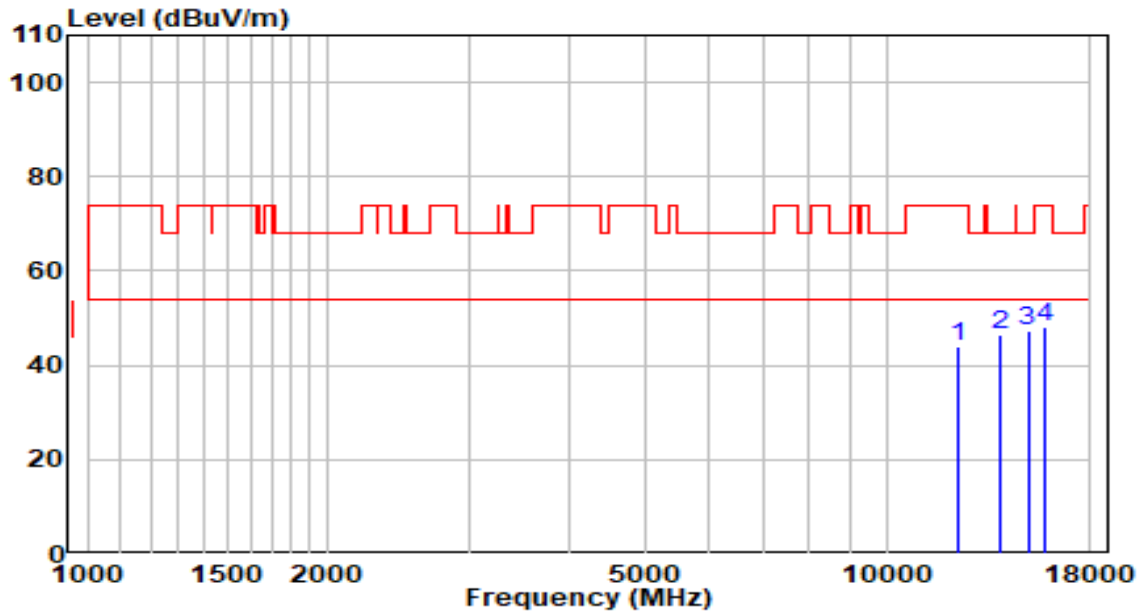

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	12322.000	25.48	18.59	44.07	-29.93	74.00	Peak
2	13869.000	24.21	22.27	46.49	-21.71	68.20	Peak
3	* 15025.000	25.35	22.05	47.40	-20.80	68.20	Peak
4	15781.500	27.64	20.65	48.29	-25.71	74.00	Peak


Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

The Result of Radiated Spurious Emission between 9kHz-30MHz

Akoustic (Path C _ Partial Path)

EUT	ACCESS POINT	Date of Test	2022-06-07
Factor	FMZB 1519B (9KHz~30MHz)	Temp. / Humidity	24.4°C/63.7%
Polarity	Face on	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	120V/60Hz

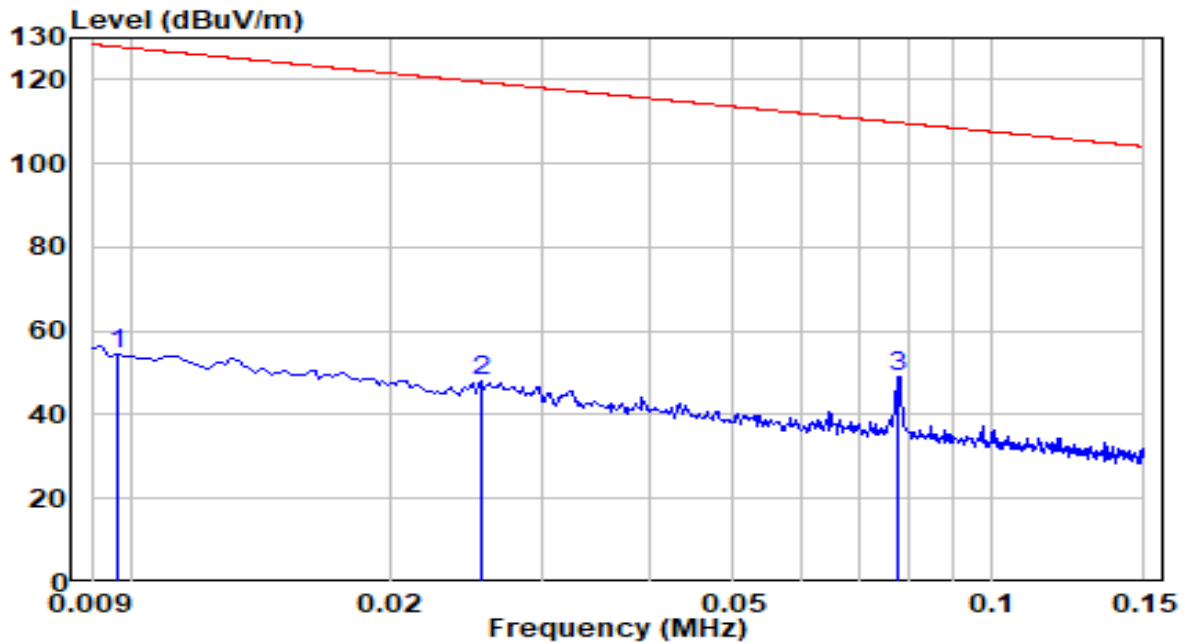


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.010	36.59	17.73	54.32	-73.61	127.93	PK
2	0.026	29.06	19.09	48.15	-71.29	119.44	PK
3	* 0.078	30.28	18.80	49.08	-60.69	109.77	PK

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-06-07
Factor	FMZB 1519B (9KHz~30MHz)	Temp. / Humidity	24.4°C/63.7%
Polarity	Face off	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	120V/60Hz

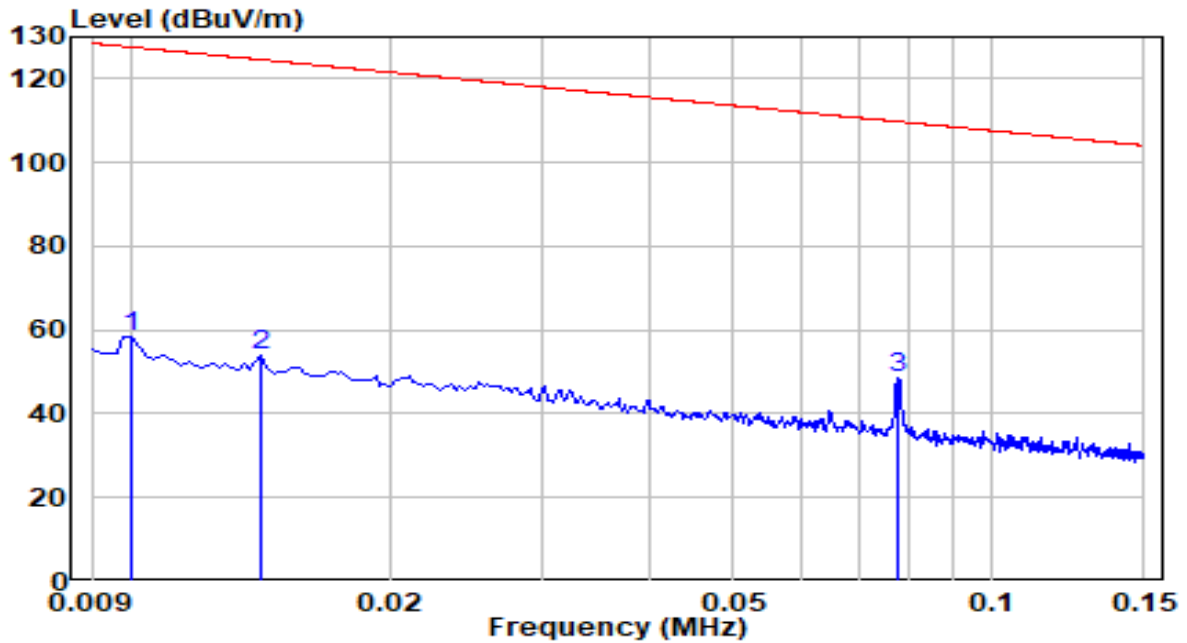


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.010	40.83	17.61	58.44	-69.12	127.57	PK
2	0.014	35.99	18.00	53.99	-70.61	124.60	PK
3	* 0.078	30.00	18.80	48.80	-60.99	109.79	PK

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-06-07
Factor	FMZB 1519B (9KHz~30MHz)	Temp. / Humidity	24.4°C/63.7%
Polarity	Face on	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	120V/60Hz

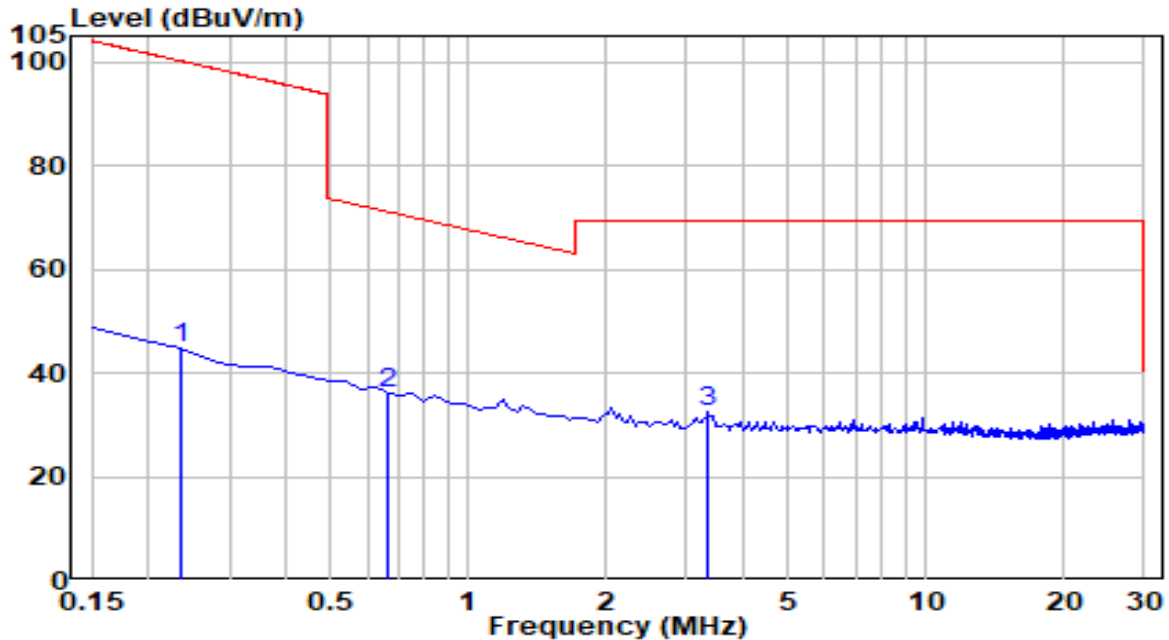


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	0.237	25.92	18.73	44.65	-55.48	100.12	PK
2	* 0.669	17.15	18.98	36.14	-34.96	71.10	PK
3	3.351	13.62	18.93	32.55	-36.95	69.50	PK

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-06-07
Factor	FMZB 1519B (9KHz~30MHz)	Temp. / Humidity	24.4°C/63.7%
Polarity	Face off	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	120V/60Hz

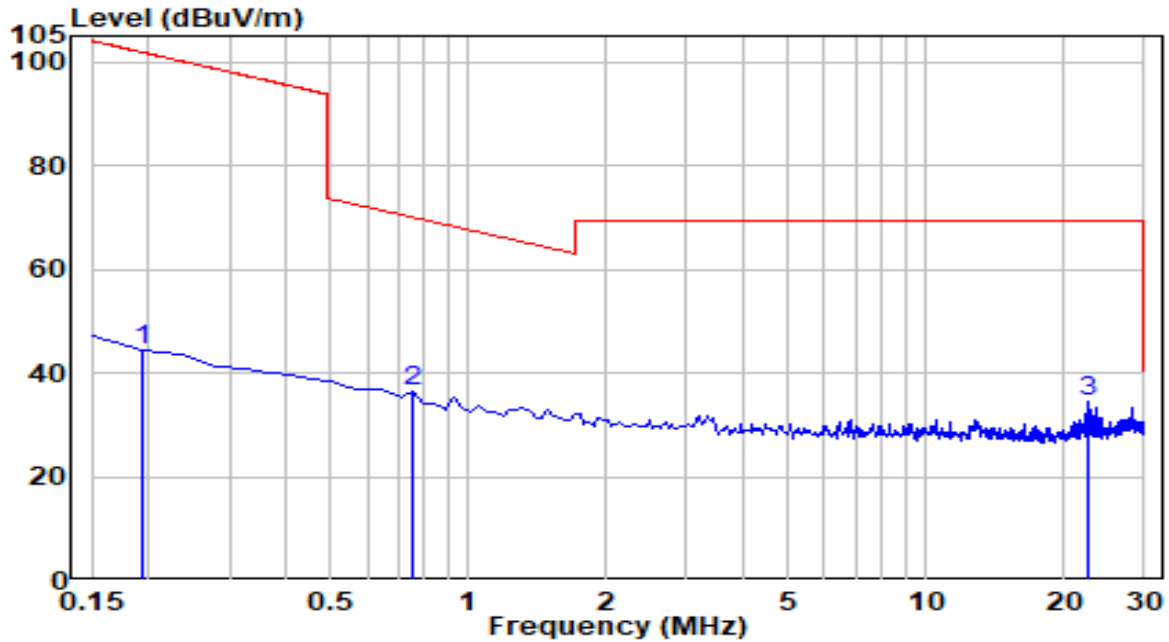


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	0.193	25.90	18.59	44.50	-57.38	101.88	PK
2	* 0.756	17.36	19.01	36.37	-33.68	70.05	PK
3	22.559	12.36	22.17	34.54	-34.96	69.50	PK

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

The Result of Radiated Emission between 30MHz-1GHz:
Akoustic (Path C _ Partial Path)

EUT	ACCESS POINT	Date of Test	2021-12-14
Factor	VULB 9162 (30MHz~8GHz)	Temp. / Humidity	21.7°C/51.6%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	120V/60Hz

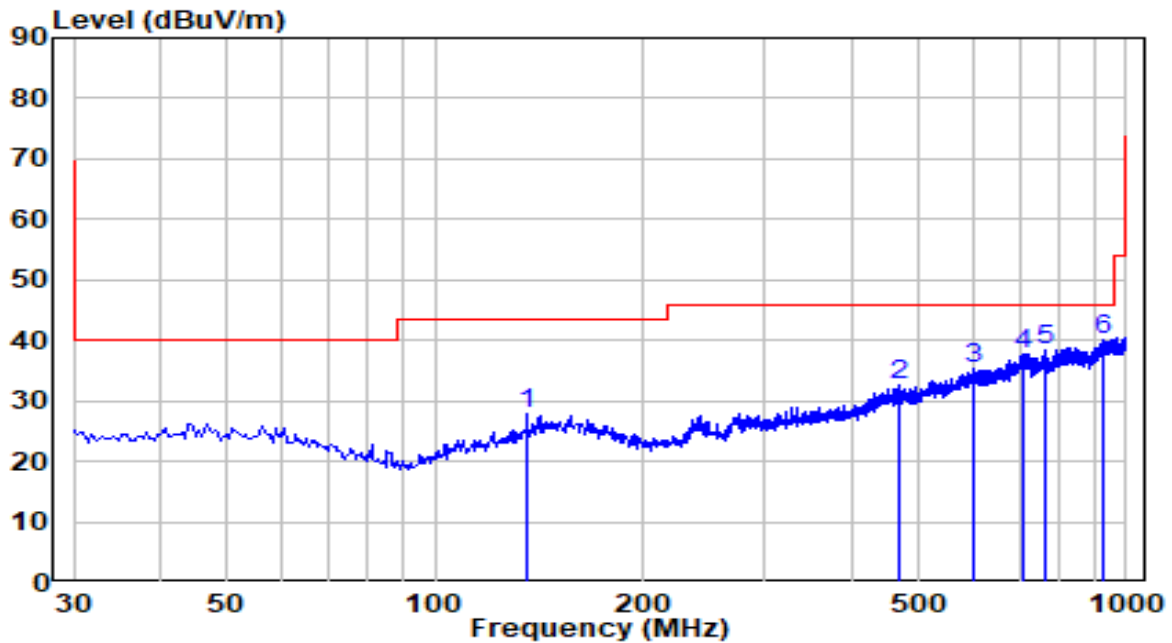


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	135.730	11.83	16.14	27.97	-15.53	43.50	Peak
2	469.410	7.33	25.41	32.74	-13.26	46.00	Peak
3	603.755	7.52	27.86	35.38	-10.62	46.00	Peak
4	710.940	8.20	29.49	37.70	-8.30	46.00	Peak
5	763.320	8.14	30.21	38.35	-7.65	46.00	Peak
6	* 929.190	8.25	32.00	40.25	-5.75	46.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

EUT	ACCESS POINT	Date of Test	2021-12-14
Factor	VULB 9162 (30MHz~8GHz)	Temp. / Humidity	21.7°C/51.6%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	120V/60Hz

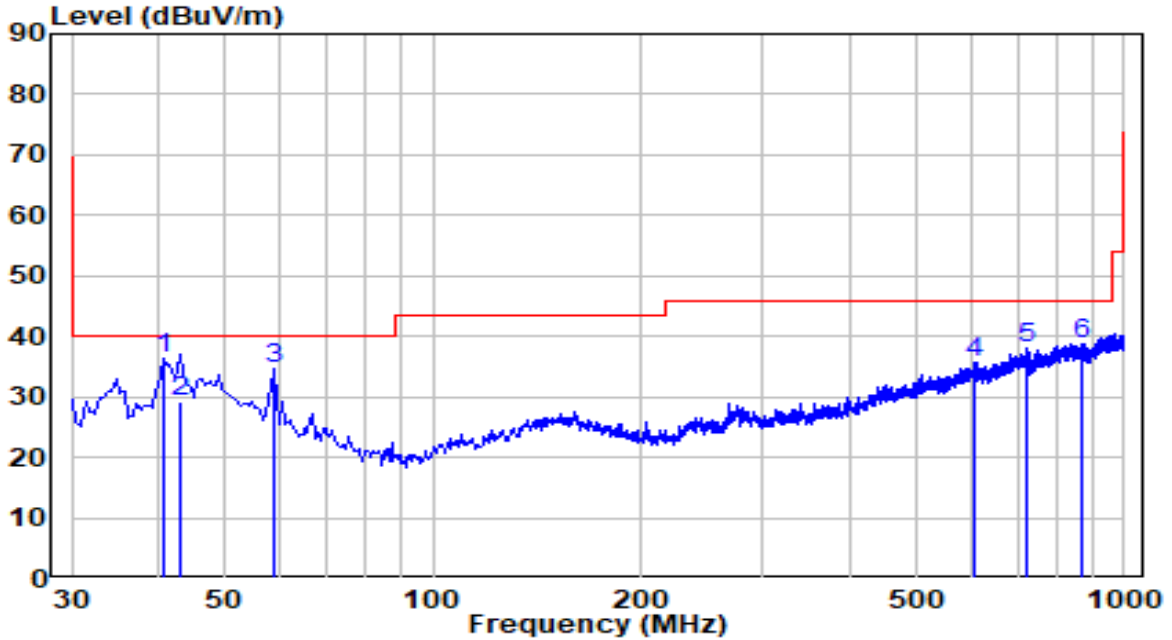


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	40.670	15.07	21.16	36.23	-3.77	40.00	Peak
2		43.095	7.79	21.52	29.31	-10.69	40.00	QP
3		58.615	14.08	20.46	34.54	-5.46	40.00	Peak
4		606.665	7.80	27.91	35.71	-10.29	46.00	Peak
5		723.550	8.18	29.69	37.87	-8.13	46.00	Peak
6		870.505	7.21	31.60	38.81	-7.19	46.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

The Result of Radiated Spurious Emission above 18GHz:
Akoustic (Path C _ Partial Path)

EUT	ACCESS POINT	Date of Test	2021-12-14
Factor	BBHA 9170 (15GHz~40GHz)	Temp. / Humidity	21.7°C/51.6%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	120V/60Hz

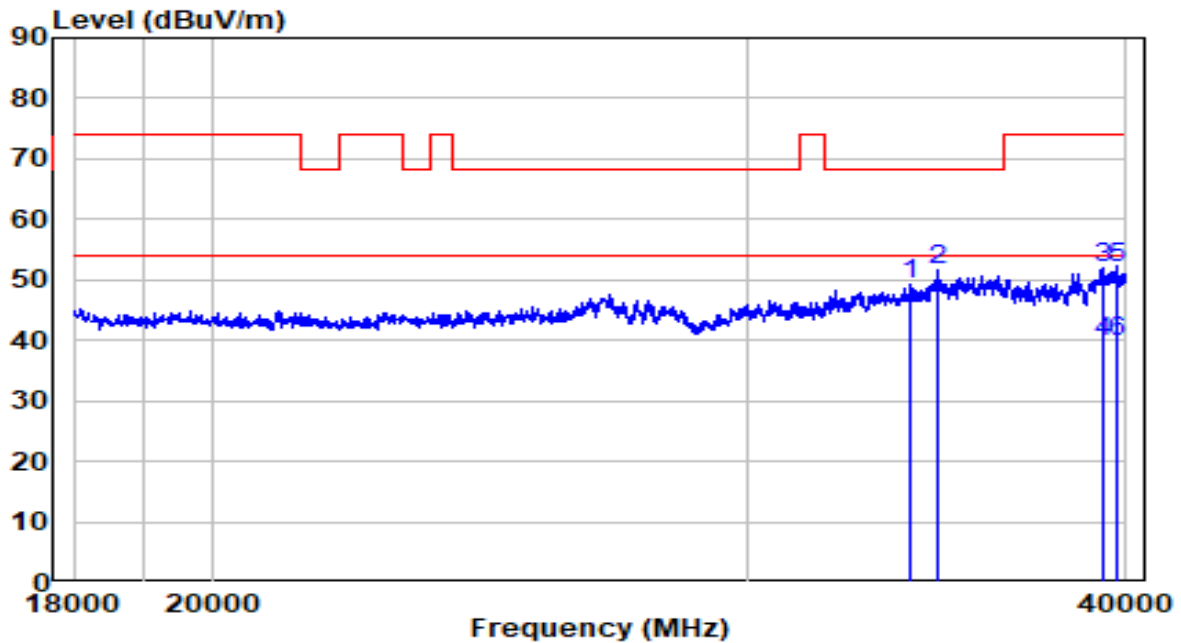


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	33961.000	39.61	9.76	49.37	-18.83	68.20	Peak
2	34698.000	41.89	9.75	51.64	-16.56	68.20	Peak
3	39340.000	38.60	13.47	52.07	-21.93	74.00	Peak
4	39340.000	26.22	13.47	39.69	-14.31	54.00	Average
5	39714.000	38.82	13.32	52.13	-21.87	74.00	Peak
6	* 39714.000	26.49	13.32	39.81	-14.19	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-14
Factor	BBHA 9170 (15GHz~40GHz)	Temp. / Humidity	21.7°C/51.6%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	120V/60Hz

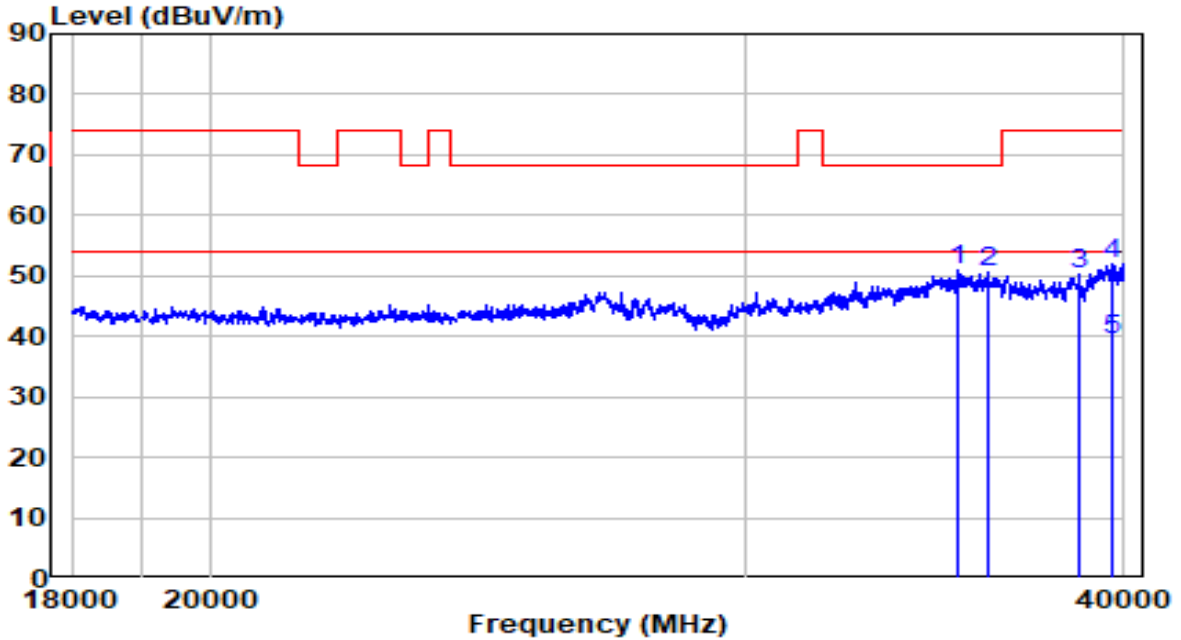


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	35270.000	40.53	10.36	50.89	-17.31	68.20	Peak
2	36095.000	38.80	11.64	50.45	-17.75	68.20	Peak
3	38680.000	37.77	12.45	50.22	-23.78	74.00	Peak
4	39670.000	38.51	13.35	51.86	-22.14	74.00	Peak
5	* 39670.000	26.02	13.35	39.37	-14.63	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

Sunyear (Path C _ Partial Path)

EUT	ACCESS POINT	Date of Test	2022-06-22
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/55.4%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5250MHz by 802.11ac-VHT160	Test Voltage	120V/60Hz

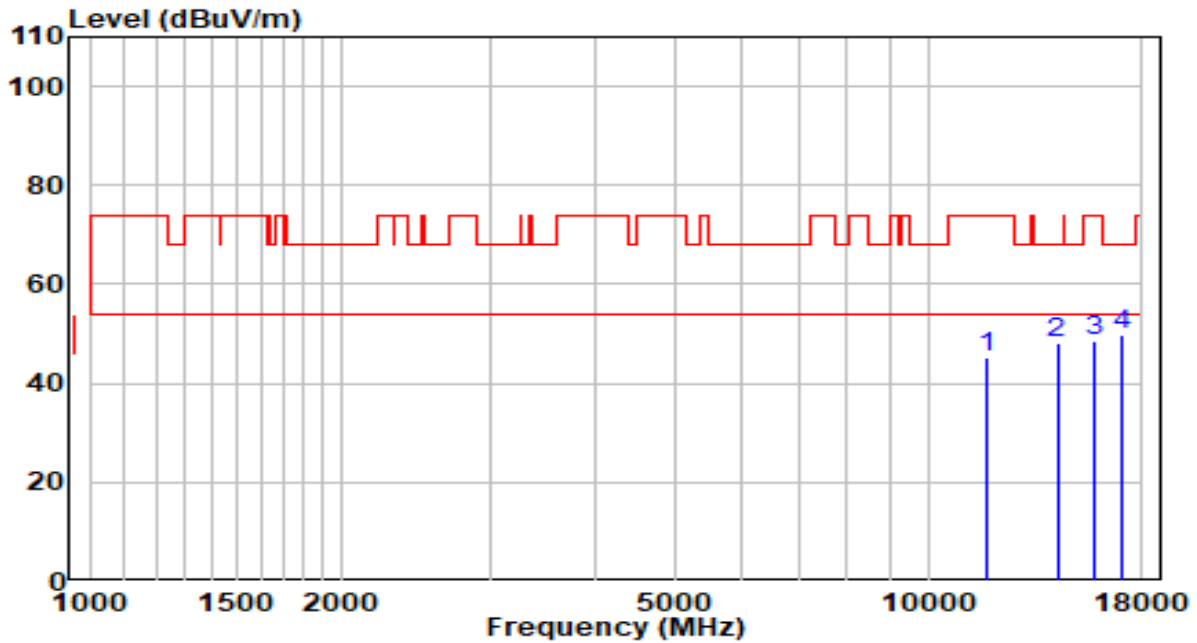


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	11735.500	25.58	19.52	45.10	-28.90	74.00	Peak
2	14251.500	25.88	22.44	48.32	-19.88	68.20	Peak
3	15815.500	27.97	20.57	48.54	-25.46	74.00	Peak
4	* 16971.500	25.53	24.32	49.85	-18.35	68.20	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-06-22
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/55.4%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5250MHz by 802.11ac-VHT160	Test Voltage	120V/60Hz

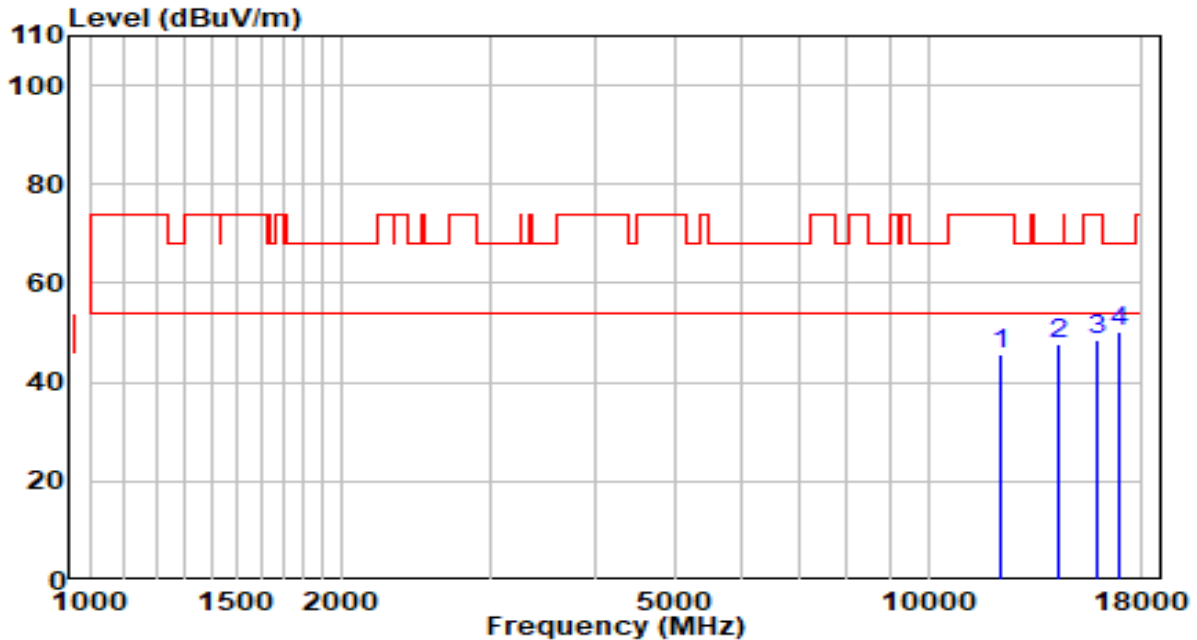


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	12194.500	26.83	18.72	45.55	-28.45	74.00	Peak
2	14336.500	25.24	22.44	47.69	-20.51	68.20	Peak
3	15883.500	28.34	20.40	48.74	-25.26	74.00	Peak
4	* 16886.500	26.35	23.77	50.13	-18.07	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

Path A _ Full Path

EUT	ACCESS POINT	Date of Test	2022-06-22
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/55.4%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5250MHz by 802.11ac-VHT160	Test Voltage	120V/60Hz

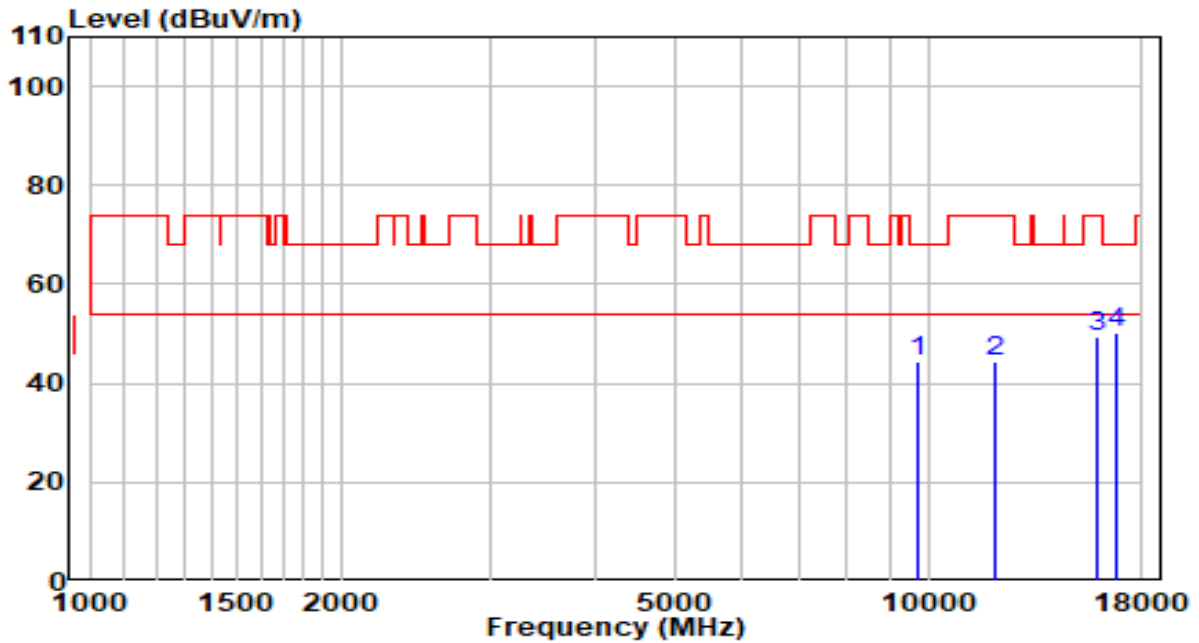


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9712.500	28.25	16.08	44.32	-23.88	68.20	Peak
2	11999.000	25.59	18.92	44.51	-29.49	74.00	Peak
3	15866.500	28.80	20.44	49.24	-24.76	74.00	Peak
4	* 16767.500	27.09	23.00	50.09	-18.11	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-06-22
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C/55.4%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5250MHz by 802.11ac-VHT160	Test Voltage	120V/60Hz

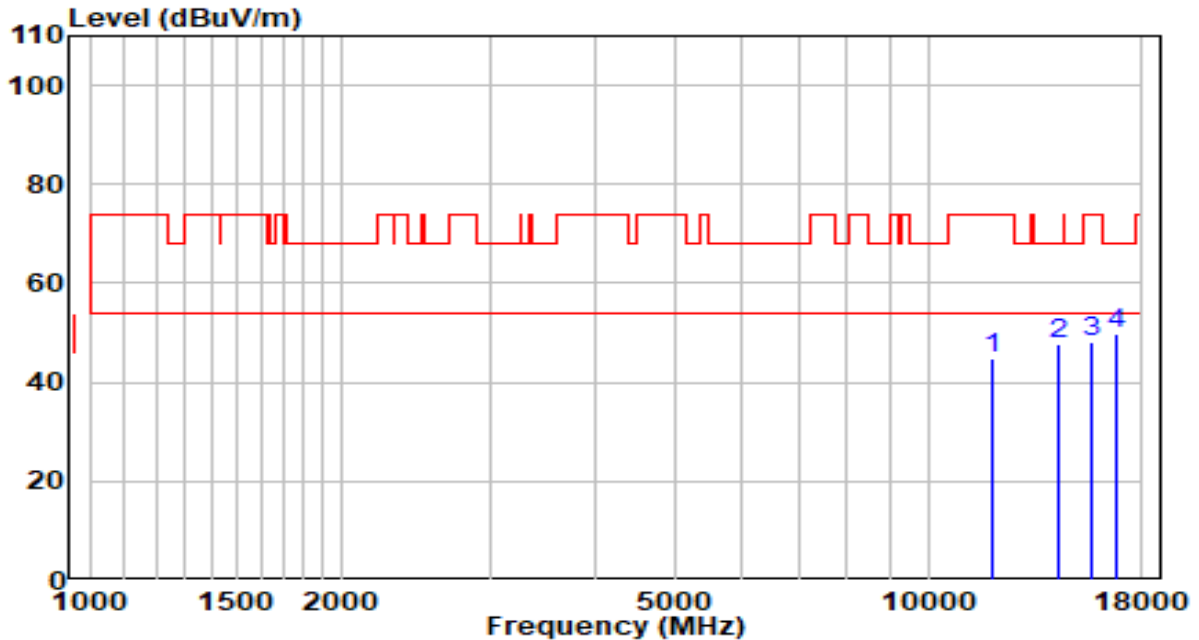

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	11888.500	25.50	19.17	44.67	-29.33	74.00	Peak
2	14260.000	25.41	22.44	47.85	-20.35	68.20	Peak
3	15637.000	27.31	21.01	48.32	-25.68	74.00	Peak
4	* 16750.500	26.84	22.89	49.73	-18.47	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

7.8. Radiated Restricted Band Edge Measurement

7.8.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz.

- 1) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.
- 2) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2.Test Procedure Used

KDB 789033 D02v02r01 – Section G

7.8.3.Test Setting

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$.

802.11a	VBW = 510Hz	802.11ax-HE20	VBW = 680Hz
802.11ac-VHT20	VBW = 560Hz	802.11ax-HE40	VBW = 1300Hz
802.11ac-VHT40	VBW = 1100Hz	802.11ax-HE80	VBW = 2700Hz
802.11ac-VHT80	VBW = 2200Hz	802.11ax-HE160	VBW = 4300Hz
802.11ac-VHT160	VBW = 4300Hz	N/A	N/A

4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.


7.8.4. Test Setup

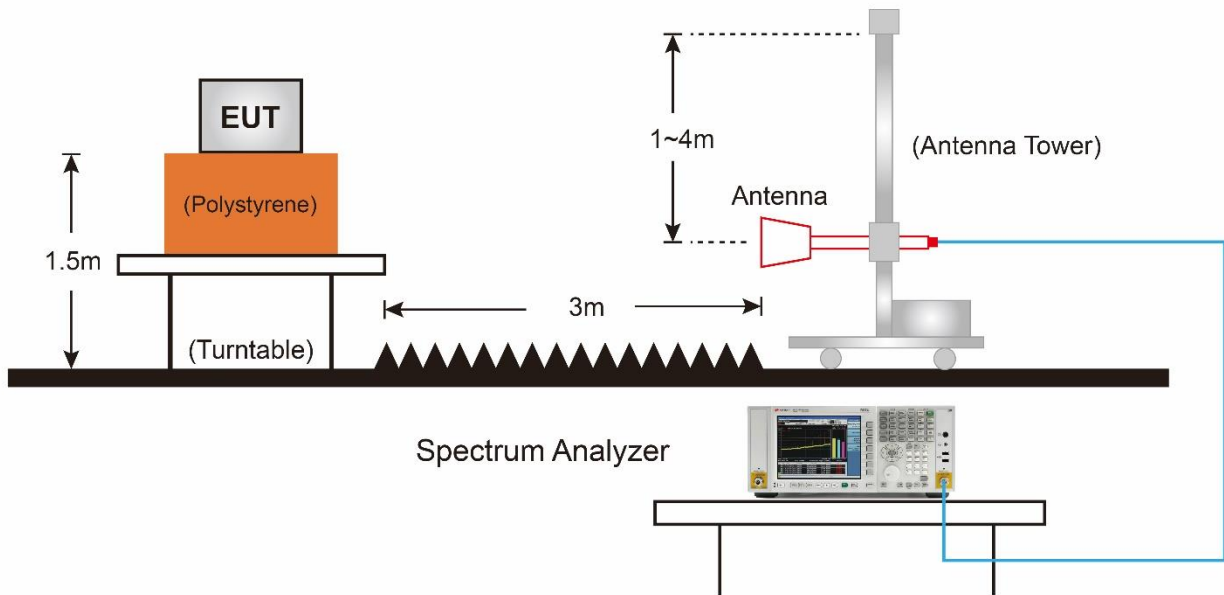

7.8.5. Test Result

Akoustic (Path C _ Partial Path)

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	120V/60Hz

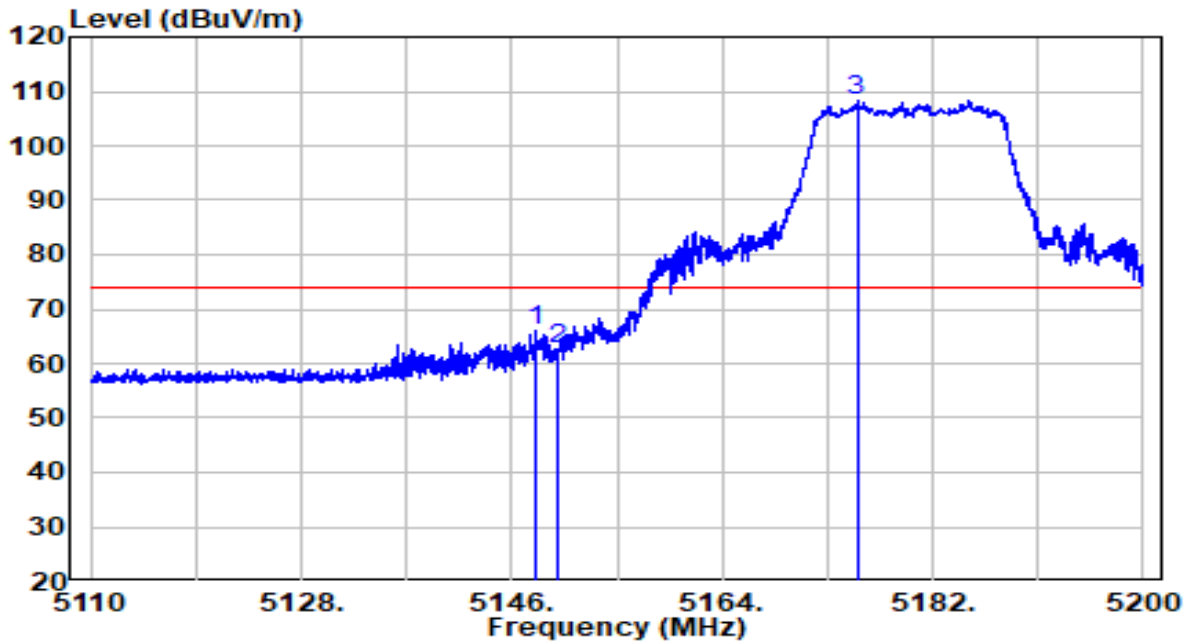


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.980	61.66	4.19	65.85	-8.15	74.00	Peak
2	5150.005	58.36	4.20	62.55	-11.45	74.00	Peak
3	* 5175.520	104.13	4.24	108.36	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	120V/60Hz

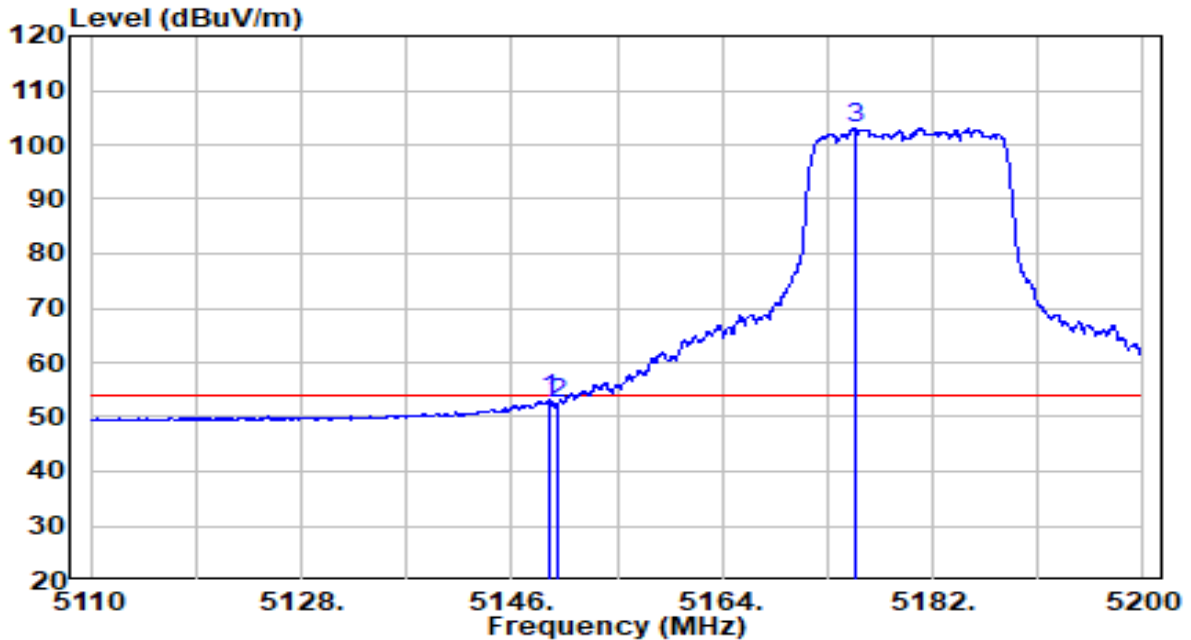


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.240	49.05	4.19	53.25	-0.75	54.00	Average
2	5150.005	48.42	4.20	52.62	-1.38	54.00	Average
3	* 5175.475	98.92	4.24	103.16	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	120V/60Hz

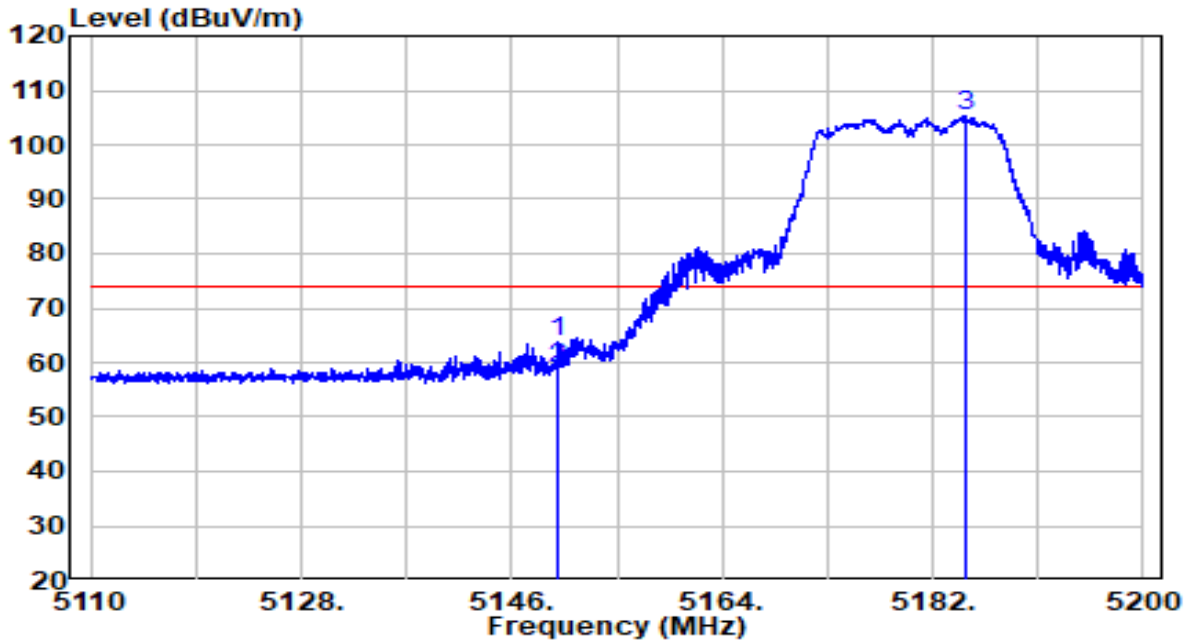


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.870	59.53	4.20	63.72	-10.28	74.00	Peak
2	5150.000	54.77	4.20	58.96	-15.04	74.00	Peak
3	* 5184.925	101.17	4.25	105.43	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	120V/60Hz

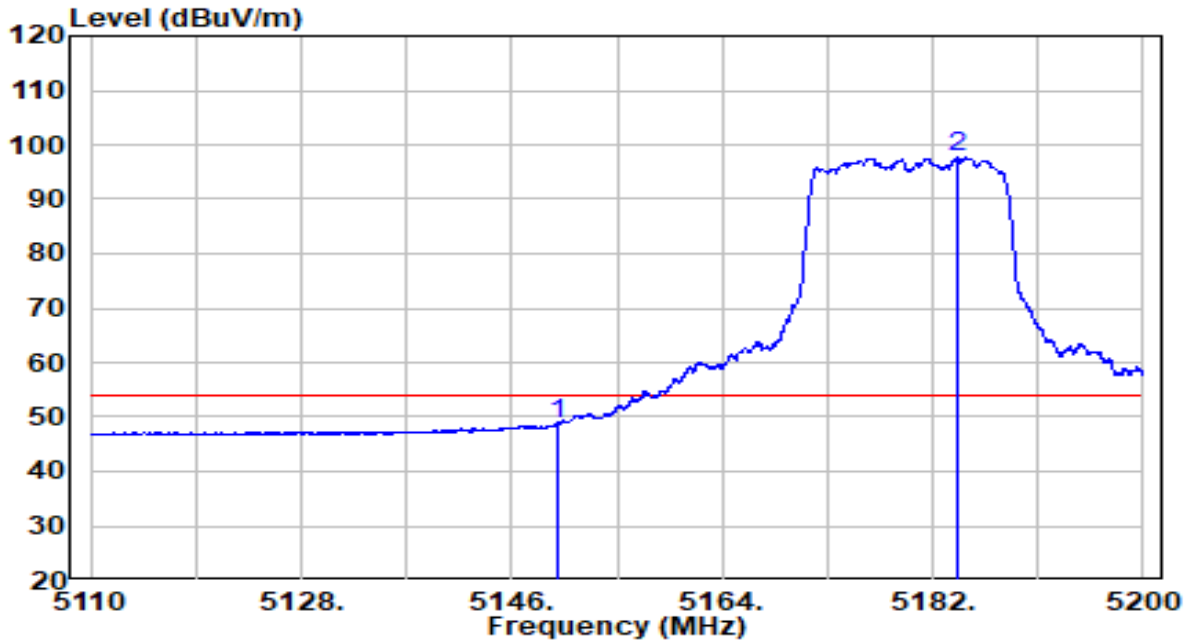


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5150.000	44.65	4.20	48.85	-5.15	54.00	Average
2	* 5184.115	93.48	4.25	97.73	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	120V/60Hz

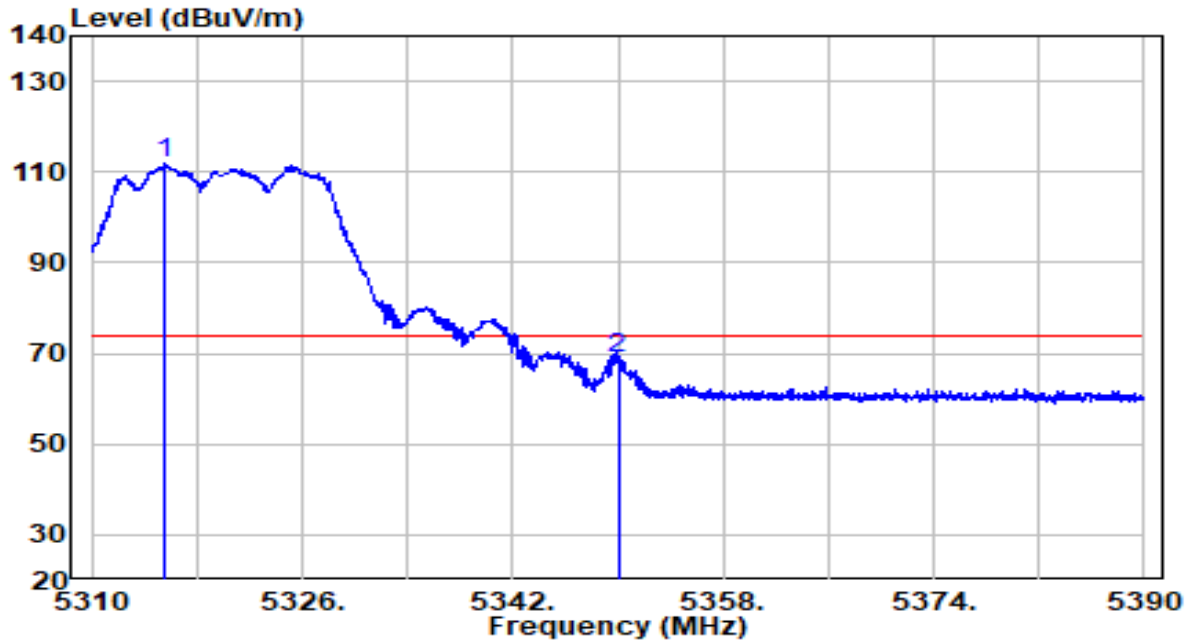


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5315.560	107.39	4.47	111.85	N/A	N/A	Peak
2	5350.000	64.25	4.52	68.77	-5.23	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	120V/60Hz

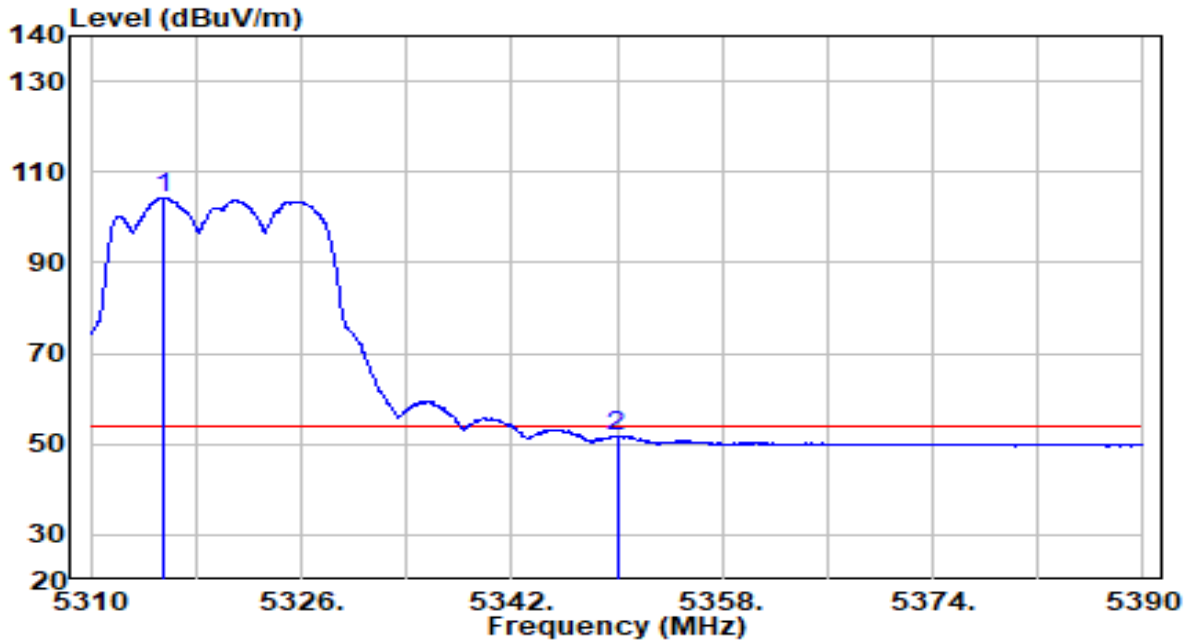


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5315.440	99.84	4.47	104.31	N/A	N/A	Average
2	5350.000	47.21	4.52	51.74	-2.26	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	120V/60Hz

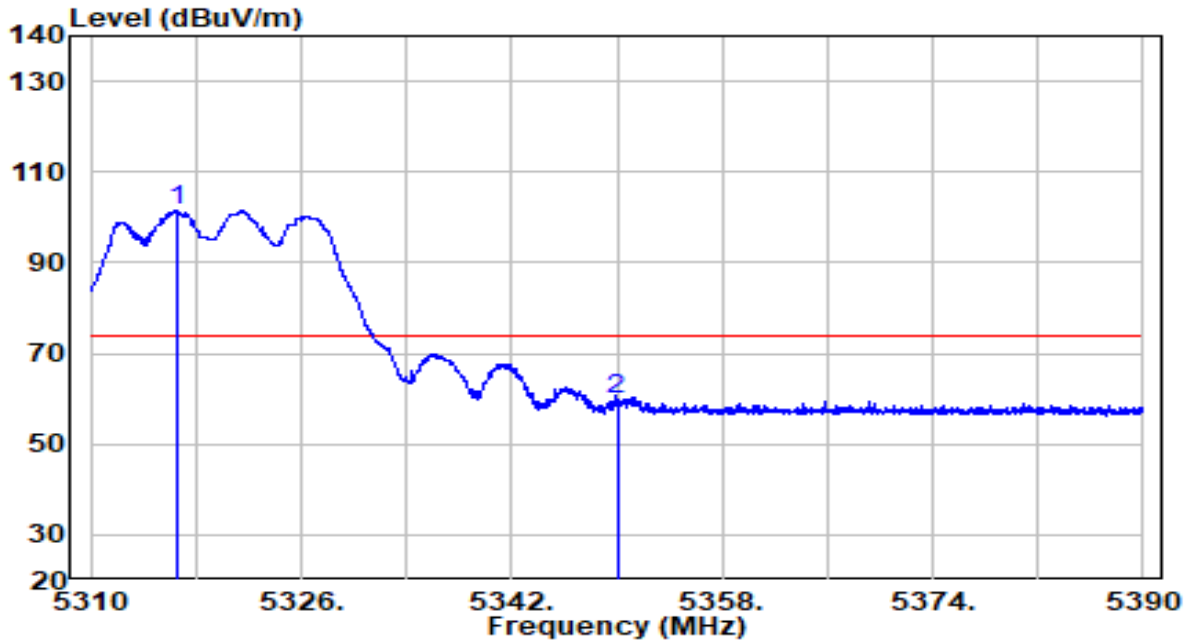


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5316.520	97.06	4.47	101.53	N/A	N/A	Peak
2	5350.000	55.48	4.52	60.00	-14.00	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	120V/60Hz

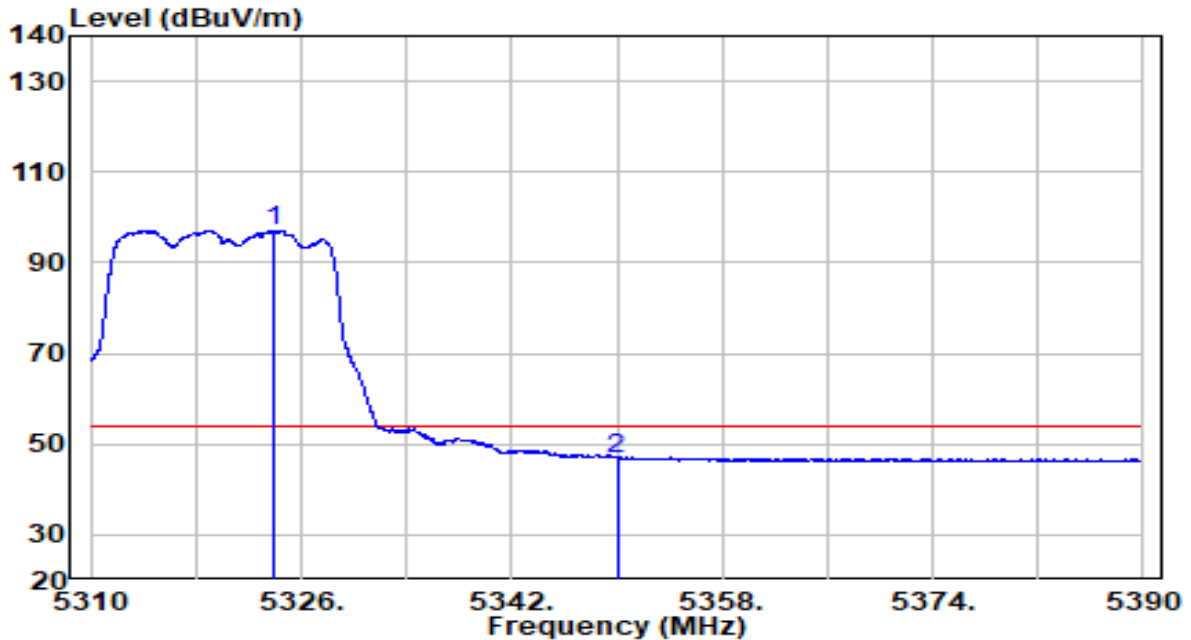


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5323.880	92.65	4.48	97.13	N/A	N/A	Average
2	5350.000	42.39	4.52	46.92	-7.08	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	120V/60Hz

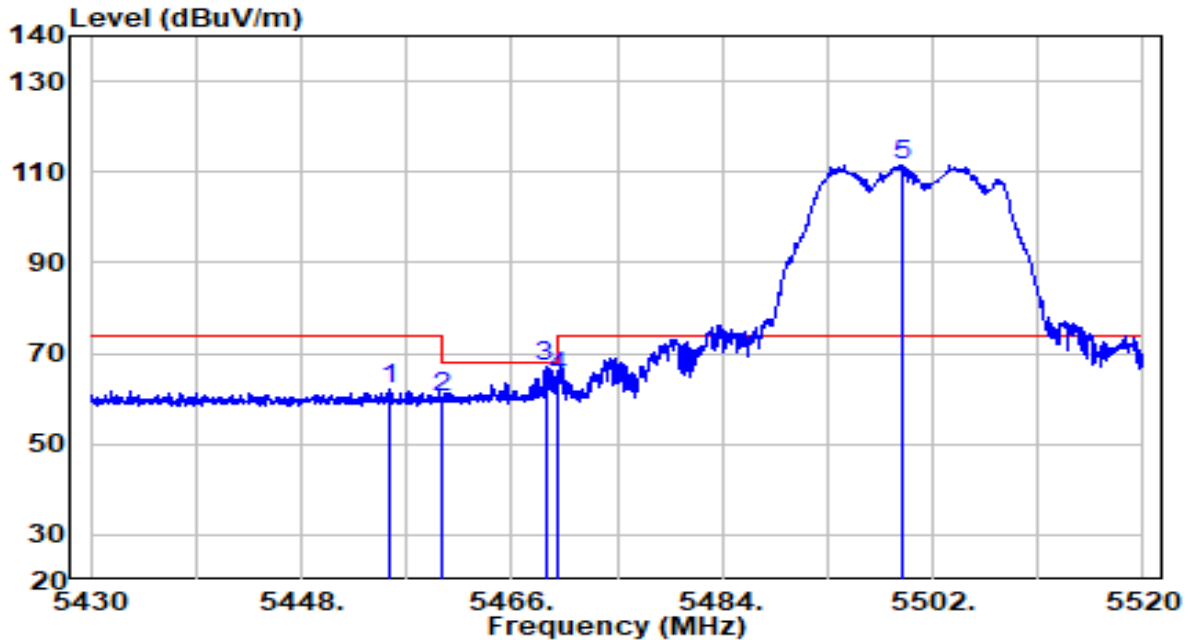


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5455.650	57.44	4.70	62.14	-11.86	74.00	Peak
2	5460.015	55.70	4.70	60.40	-7.80	68.20	Peak
3	5468.880	62.21	4.72	66.93	-1.27	68.20	Peak
4	5470.000	60.13	4.72	64.85	-3.35	68.20	Peak
5	* 5499.300	106.75	4.77	111.51	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	120V/60Hz

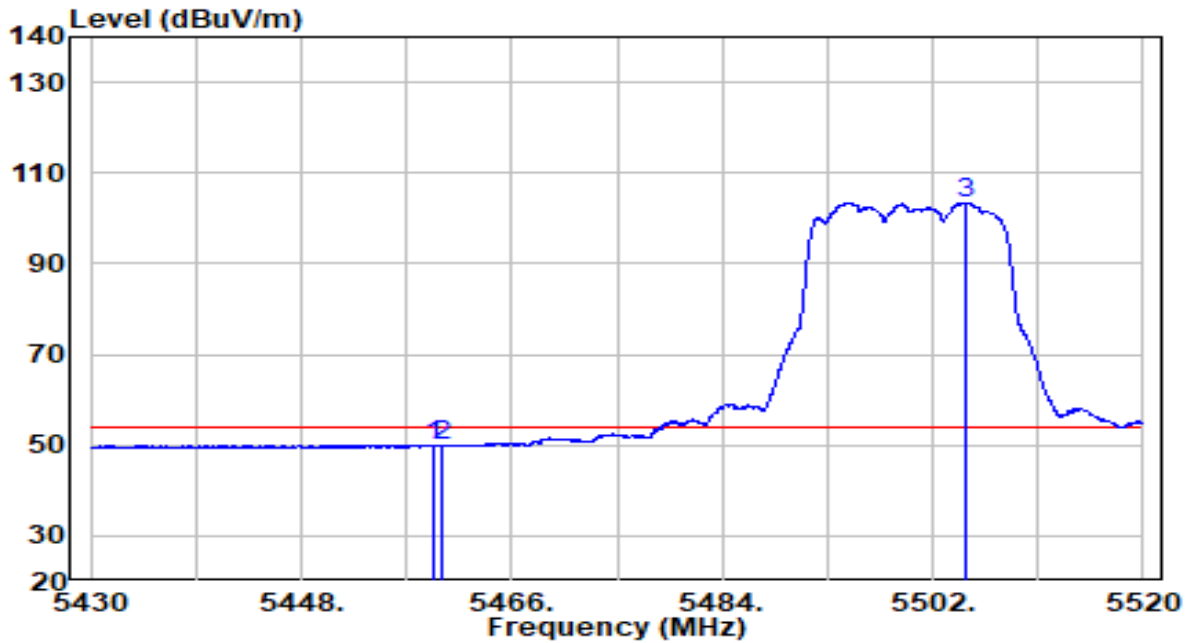


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.295	45.24	4.70	49.94	-4.06	54.00	Average
2	5460.000	45.05	4.70	49.75	-4.25	54.00	Average
3	* 5504.790	98.68	4.79	103.47	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	120V/60Hz

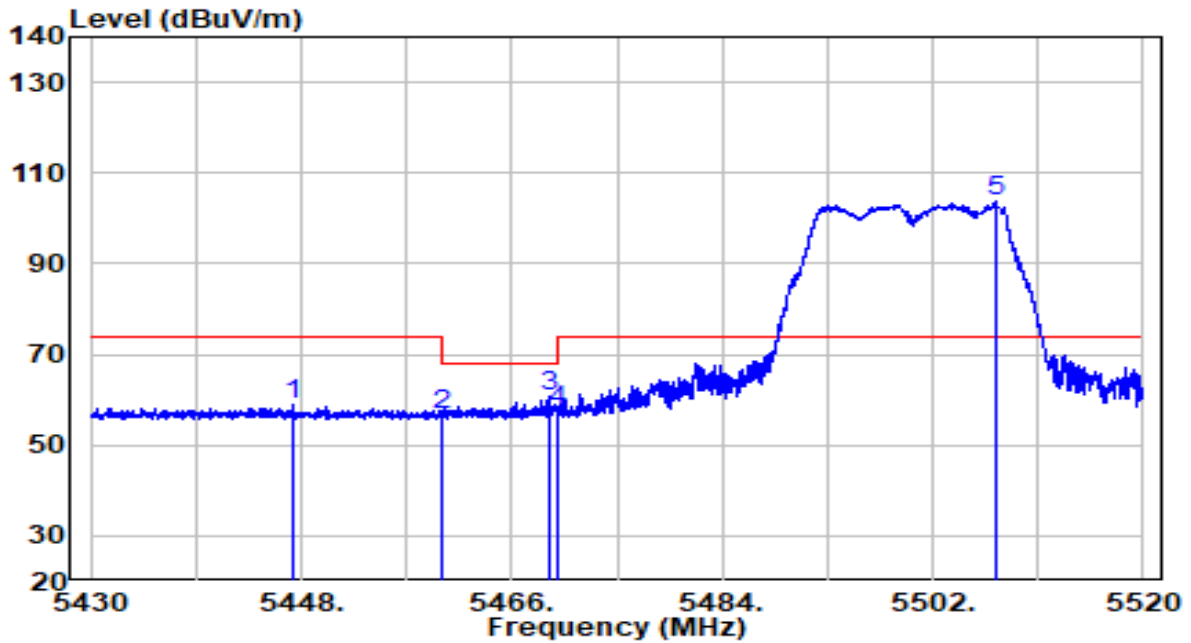


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5447.190	54.30	4.68	58.99	-15.01	74.00	Peak
2	5460.000	51.82	4.70	56.53	-11.67	68.20	Peak
3	5469.150	56.16	4.72	60.88	-7.32	68.20	Peak
4	5470.000	52.69	4.72	57.41	-10.79	68.20	Peak
5	* 5507.490	99.07	4.80	103.86	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	120V/60Hz

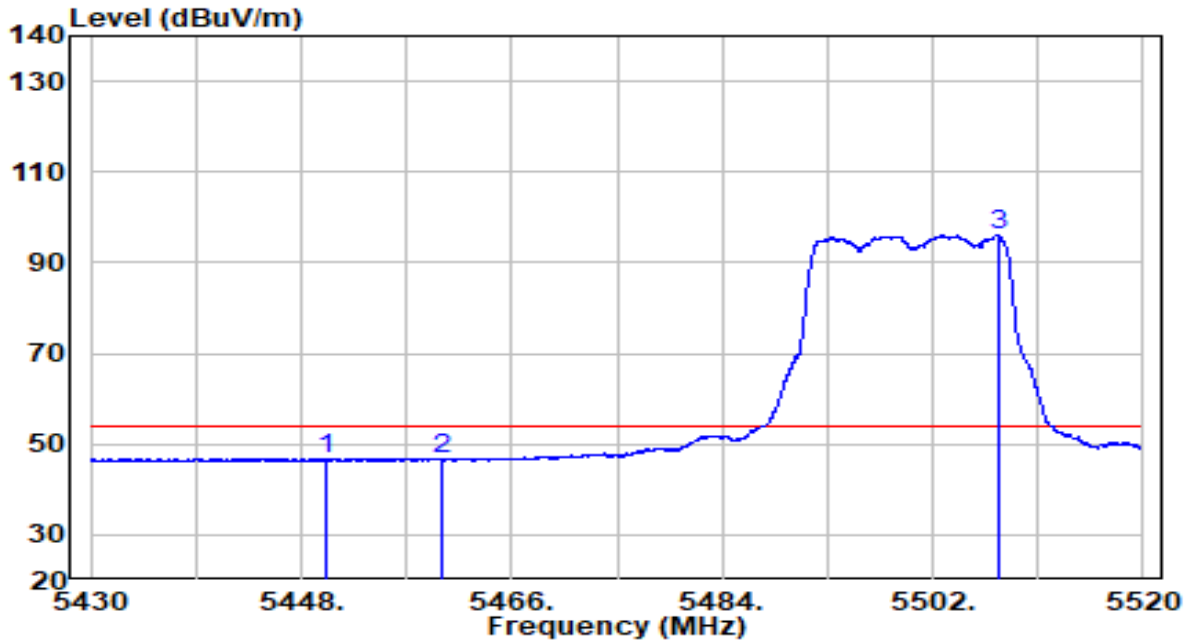


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5450.025	42.22	4.69	46.91	-7.09	54.00	Average
2	5460.000	41.94	4.70	46.64	-7.36	54.00	Average
3	* 5507.580	91.28	4.80	96.08	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5700MHz	Test Voltage	120V/60Hz

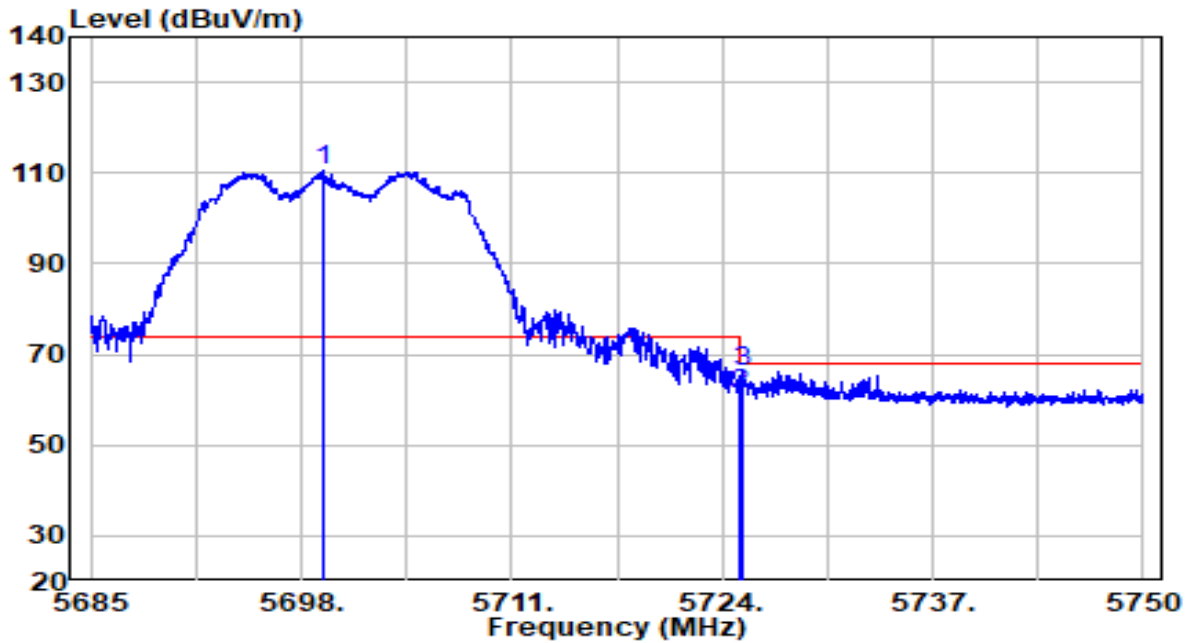


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5699.300	105.02	5.50	110.51	N/A	N/A	Peak
2	5725.007	55.60	5.59	61.19	-7.01	68.20	Peak
3	5725.268	60.50	5.59	66.09	-2.11	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5700MHz	Test Voltage	120V/60Hz

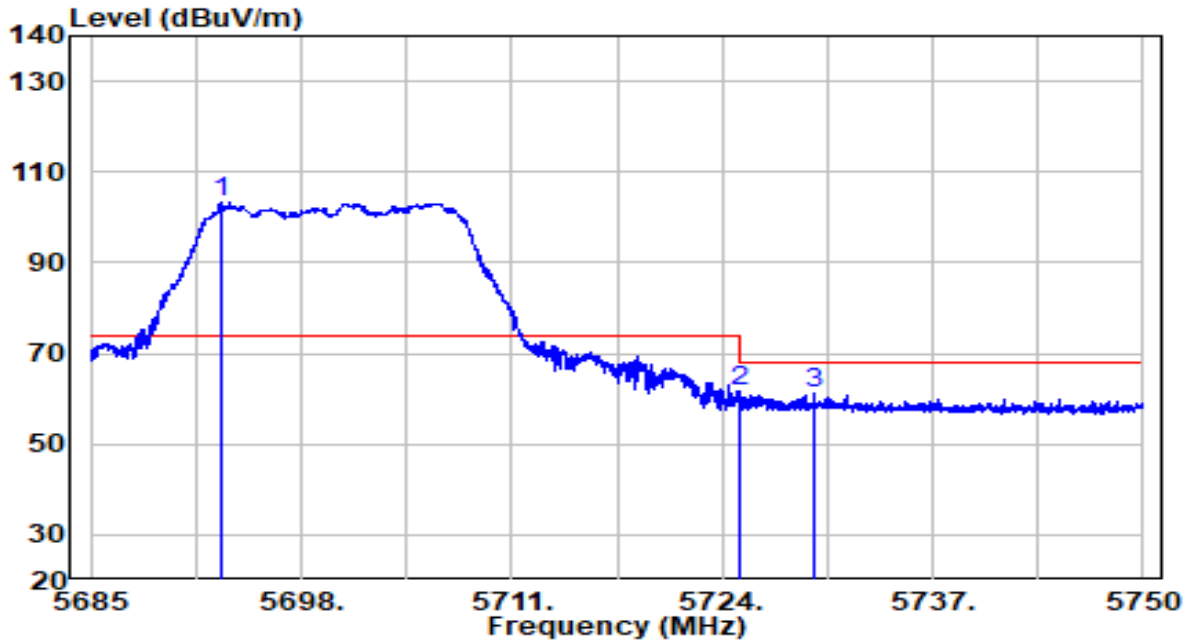


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5692.995	98.03	5.47	103.50	N/A	N/A	Peak
2	5725.000	56.09	5.59	61.68	-6.52	68.20	Peak
3	5729.623	55.75	5.61	61.35	-6.85	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	120V/60Hz

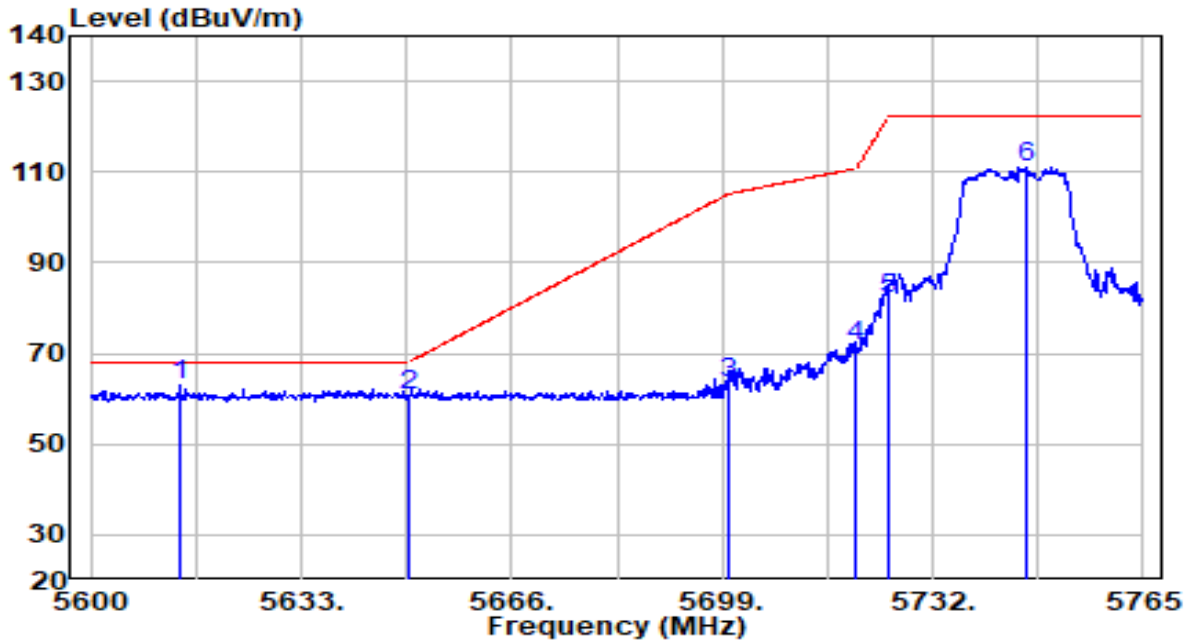


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	57.67	5.19	62.86	-5.34	68.20	Peak
2		55.51	5.32	60.83	-7.37	68.20	Peak
3		58.12	5.50	63.62	-41.58	105.20	Peak
4		65.90	5.57	71.47	-39.33	110.80	Peak
5		76.44	5.59	82.03	-40.17	122.20	Peak
6		105.55	5.67	111.22	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	120V/60Hz

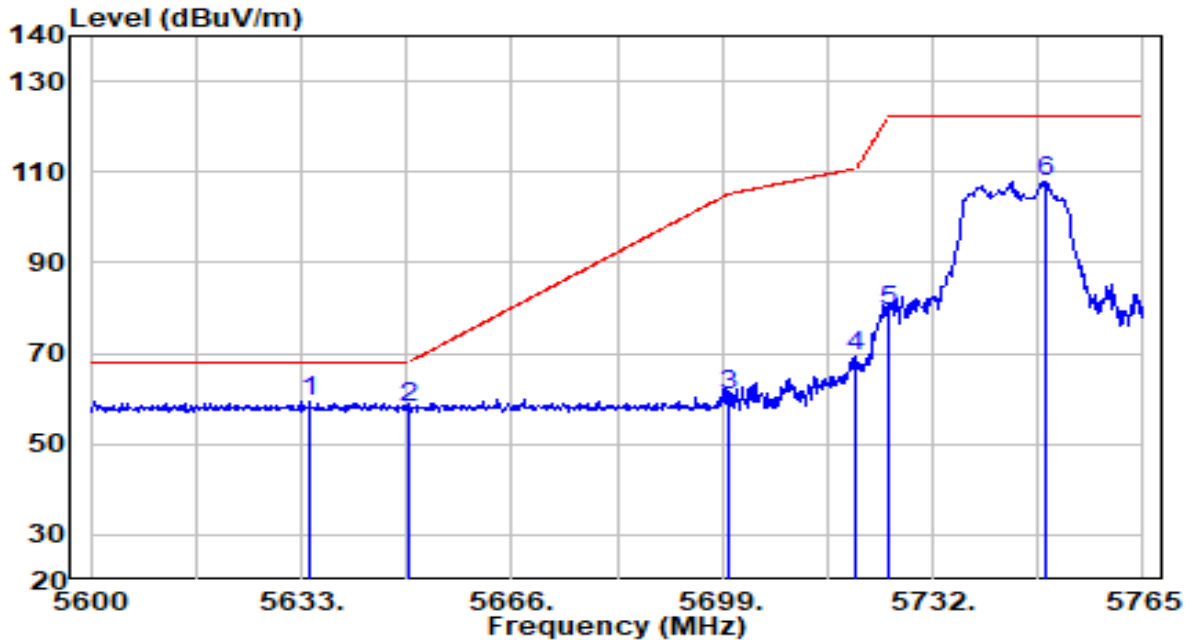


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5634.320	54.27	5.26	59.53	-8.67	68.20	Peak
2	5650.000	52.68	5.32	58.00	-10.20	68.20	Peak
3	5700.000	55.19	5.50	60.69	-44.51	105.20	Peak
4	5720.000	63.86	5.57	69.43	-41.37	110.80	Peak
5	5725.000	73.74	5.59	79.32	-42.88	122.20	Peak
6	5749.820	102.15	5.68	107.83	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	120V/60Hz

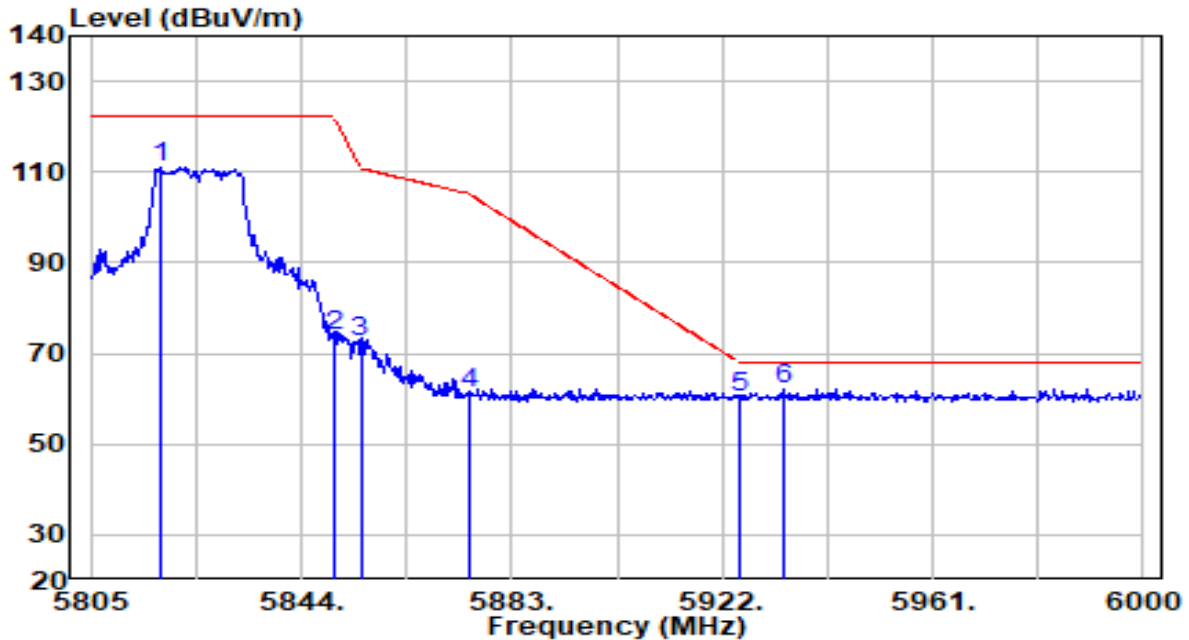


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5818.065	105.08	5.93	111.00	N/A	N/A	Peak
2	5850.000	67.83	6.04	73.88	-48.32	122.20	Peak
3	5855.000	66.62	6.06	72.68	-38.12	110.80	Peak
4	5875.000	55.22	6.13	61.36	-43.84	105.20	Peak
5	5925.000	54.11	6.32	60.43	-7.77	68.20	Peak
6	* 5933.310	55.71	6.35	62.06	-6.14	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	120V/60Hz

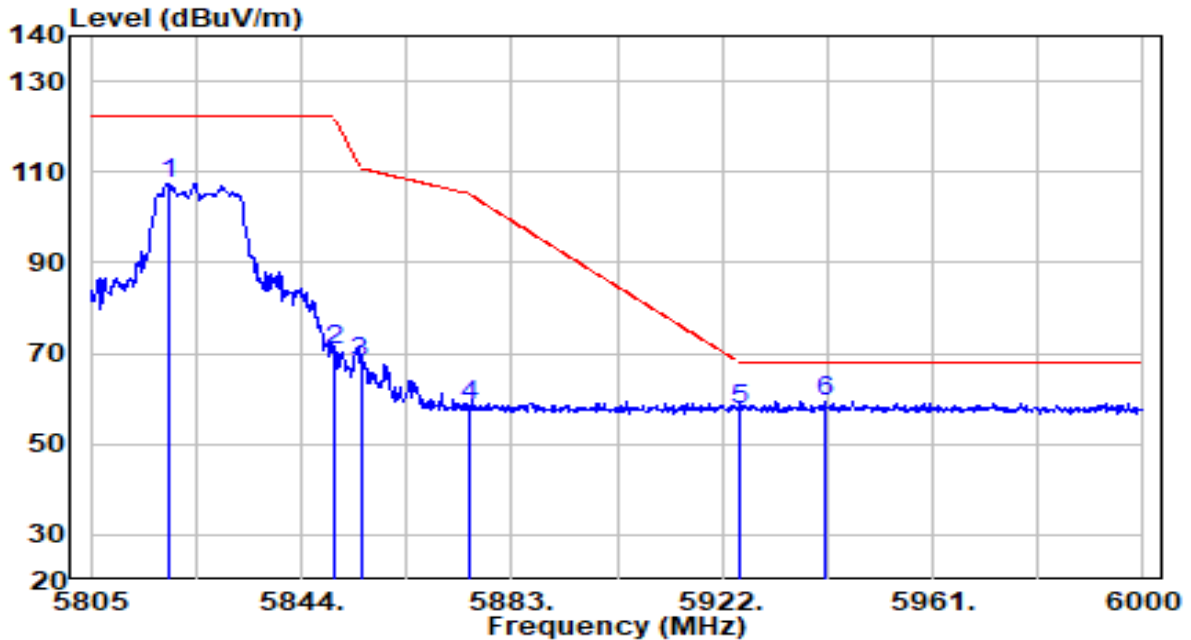


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5819.625	101.39	5.93	107.32	N/A	N/A	Peak
2	5850.000	64.81	6.04	70.86	-51.34	122.20	Peak
3	5855.000	62.15	6.06	68.21	-42.59	110.80	Peak
4	5875.000	52.39	6.13	58.53	-46.67	105.20	Peak
5	5925.000	51.33	6.32	57.64	-10.56	68.20	Peak
6	* 5940.915	53.20	6.37	59.58	-8.62	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	120V/60Hz

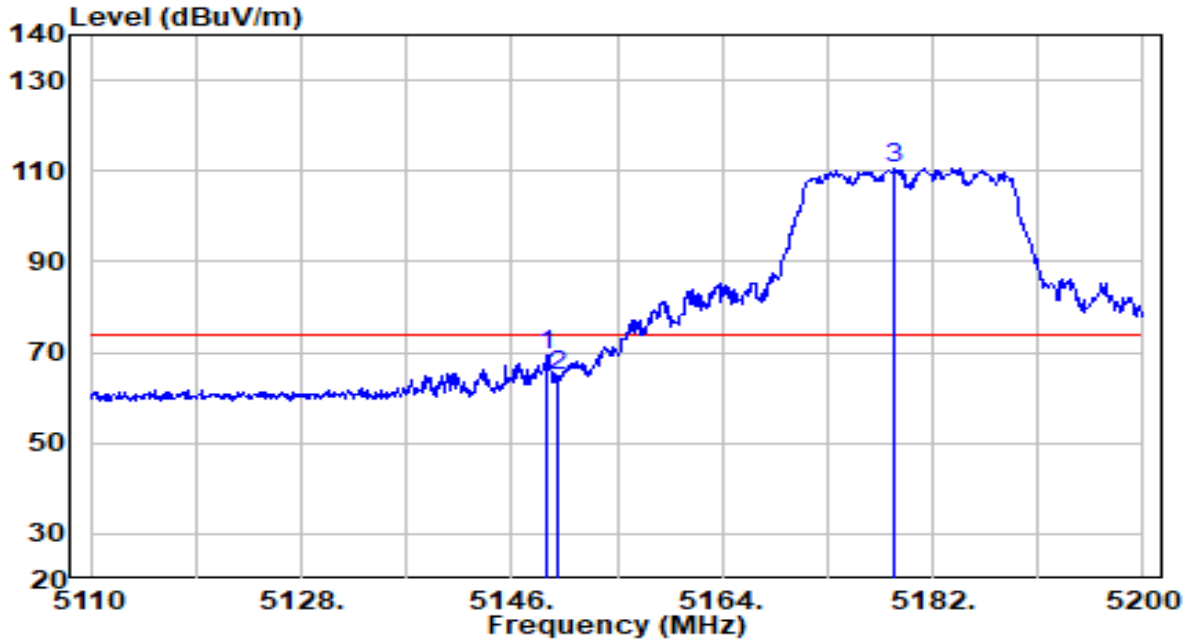


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.970	65.29	4.19	69.48	-4.52	74.00	Peak
2	5150.000	60.51	4.20	64.71	-9.29	74.00	Peak
3	* 5178.760	106.50	4.24	110.74	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	120V/60Hz

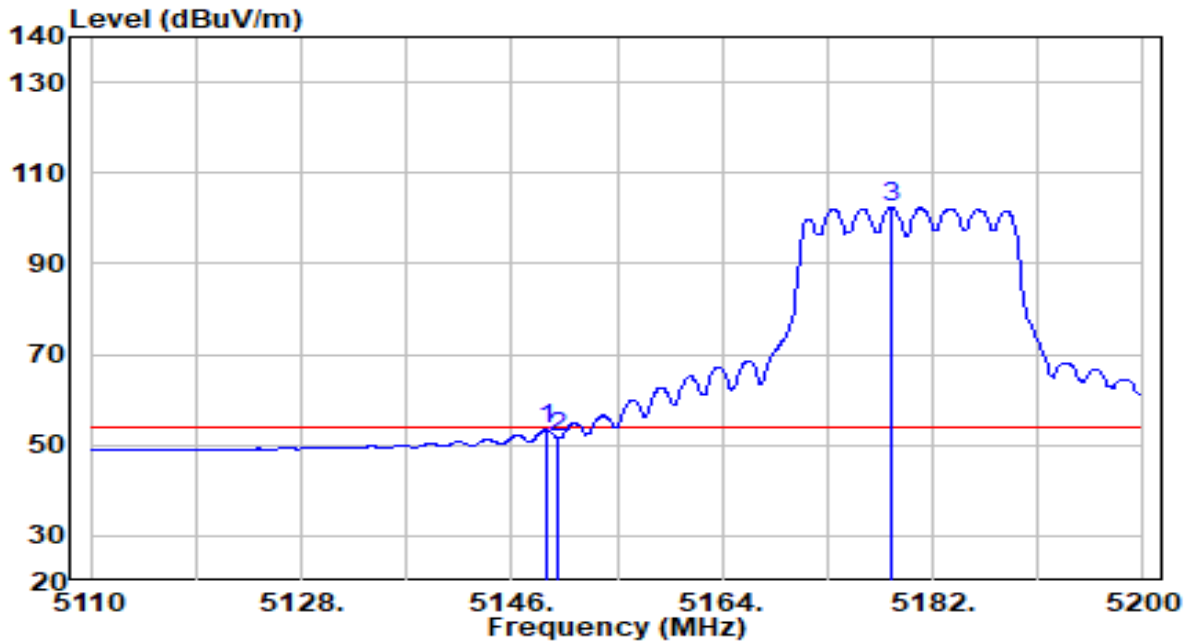


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.970	49.22	4.19	53.42	-0.58	54.00	Average
2	5150.000	47.29	4.20	51.49	-2.51	54.00	Average
3	* 5178.490	98.11	4.24	102.35	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	120V/60Hz

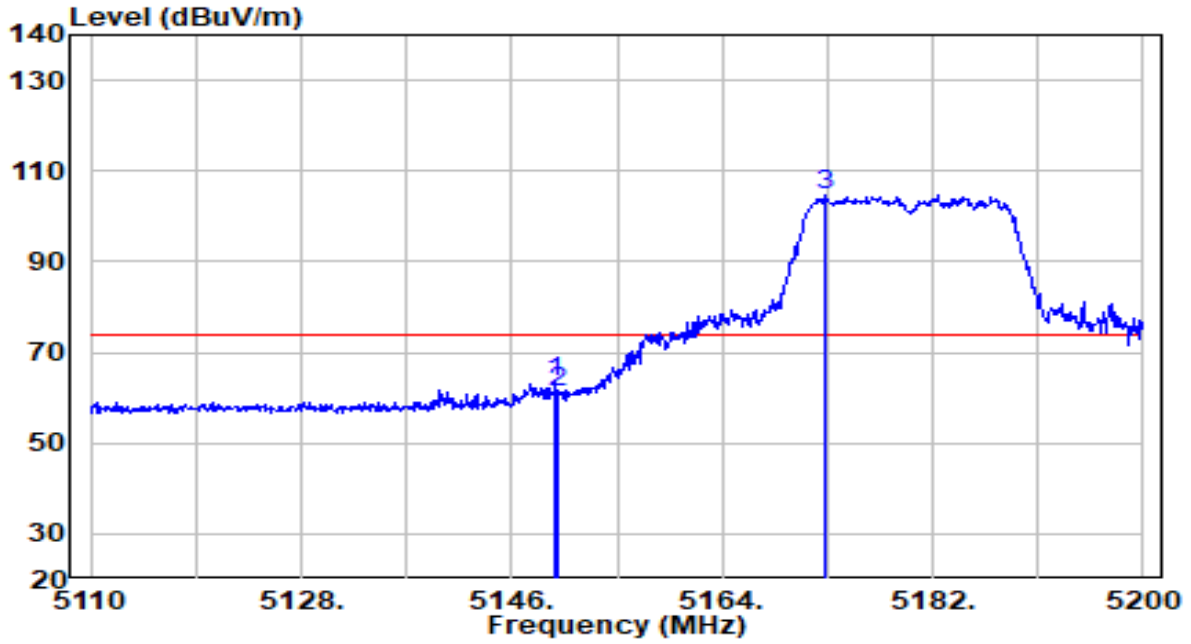


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.690	59.39	4.20	63.59	-10.41	74.00	Peak
2	5150.000	56.91	4.20	61.10	-12.90	74.00	Peak
3	* 5172.730	100.33	4.23	104.56	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	120V/60Hz

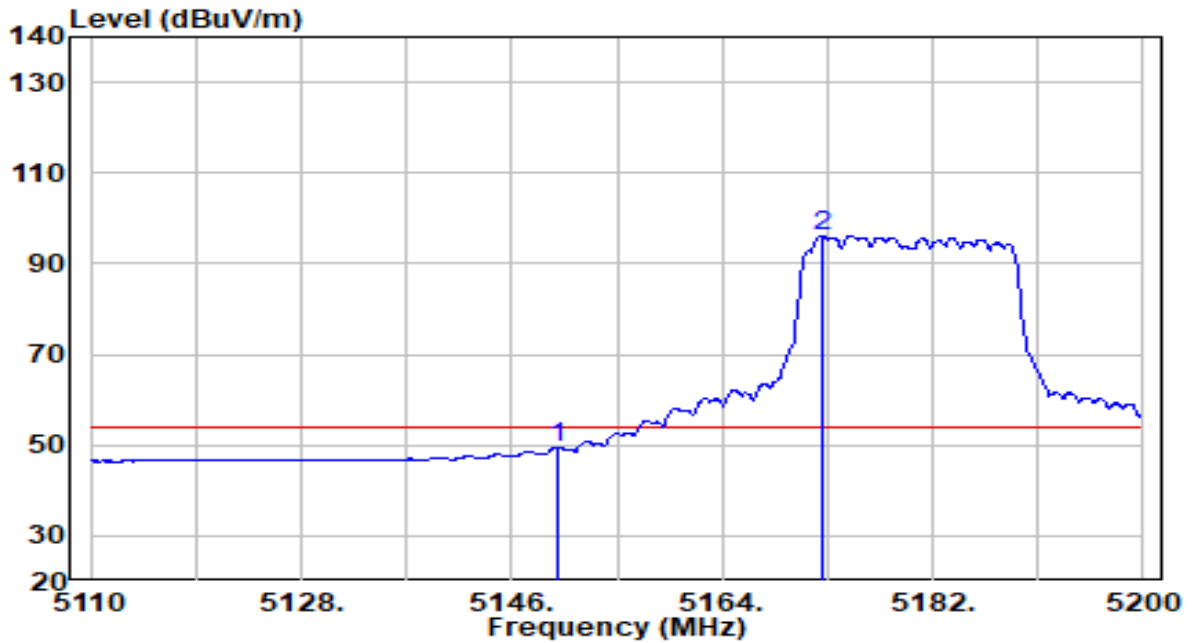


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	45.43	4.20	49.62	-4.38	54.00	Average
2	* 5172.550	91.99	4.23	96.22	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	120V/60Hz

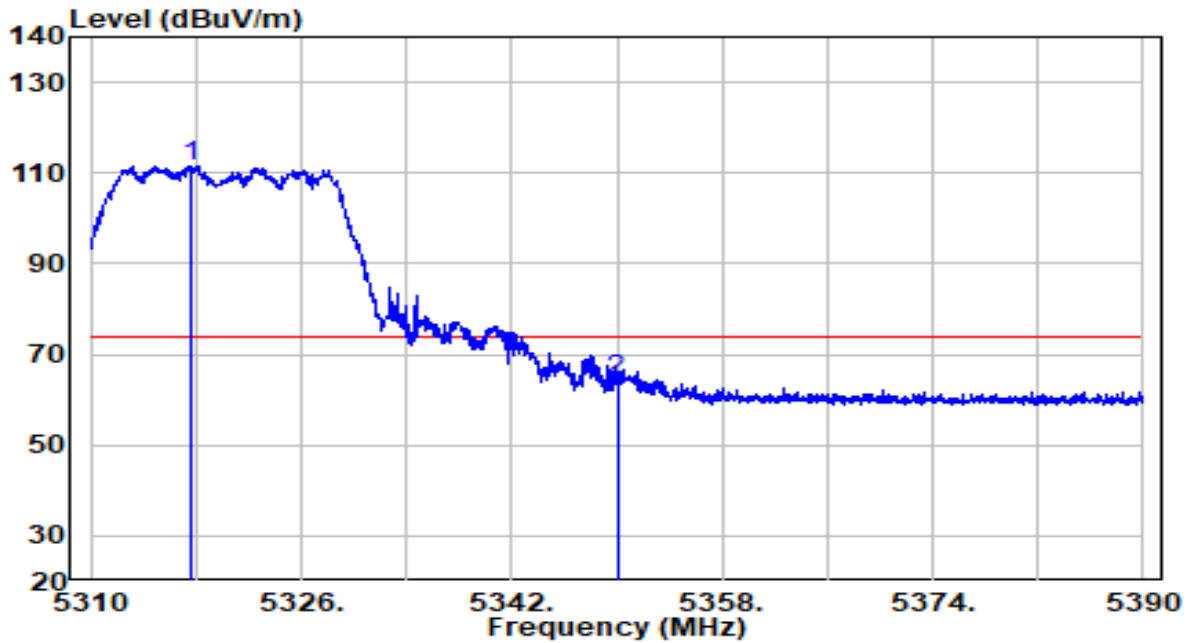


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5317.560	107.10	4.47	111.57	N/A	N/A	Peak
2	5350.000	60.00	4.52	64.52	-9.48	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	120V/60Hz

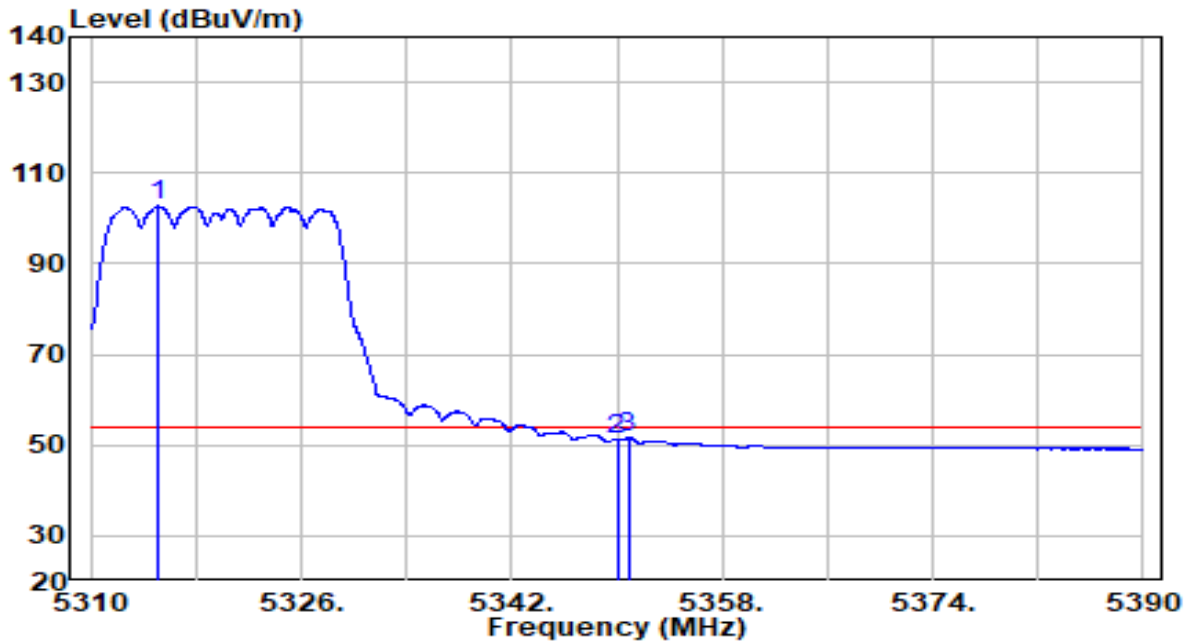


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5315.120	98.23	4.47	102.69	N/A	N/A	Average
2	5350.000	46.64	4.52	51.16	-2.84	54.00	Average
3	5350.840	47.02	4.53	51.54	-2.46	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	120V/60Hz

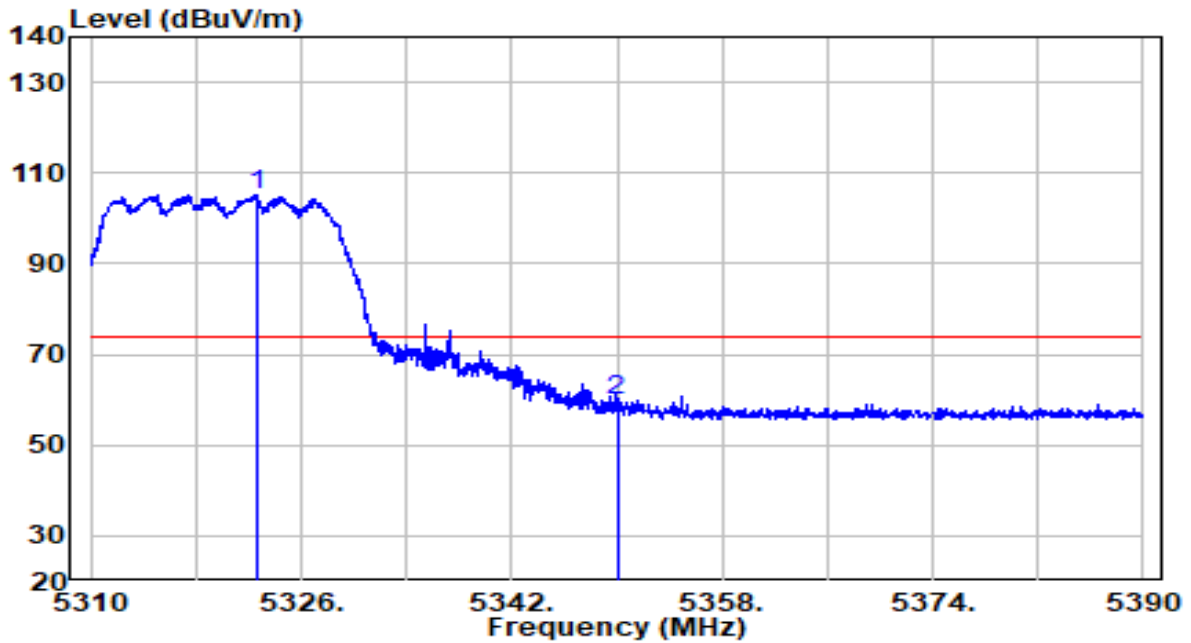


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5322.560	100.83	4.48	105.31	N/A	N/A	Peak
2	5350.000	55.51	4.52	60.03	-13.97	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	120V/60Hz

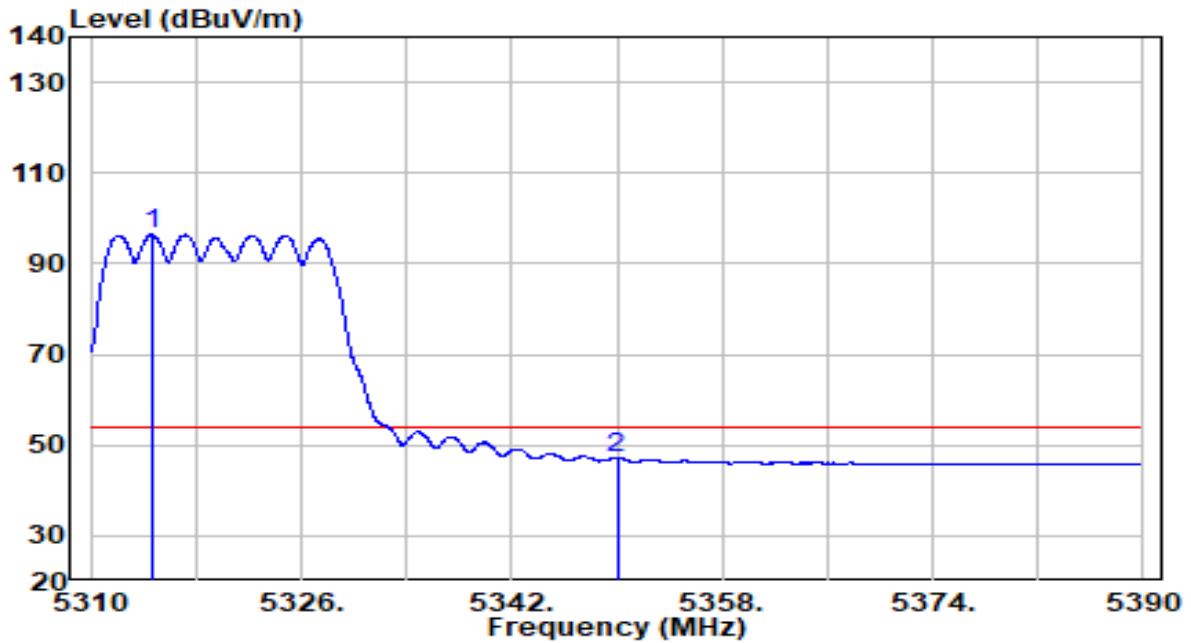


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5314.680	91.90	4.47	96.37	N/A	N/A	Average
2	5350.000	42.65	4.52	47.18	-6.82	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	120V/60Hz

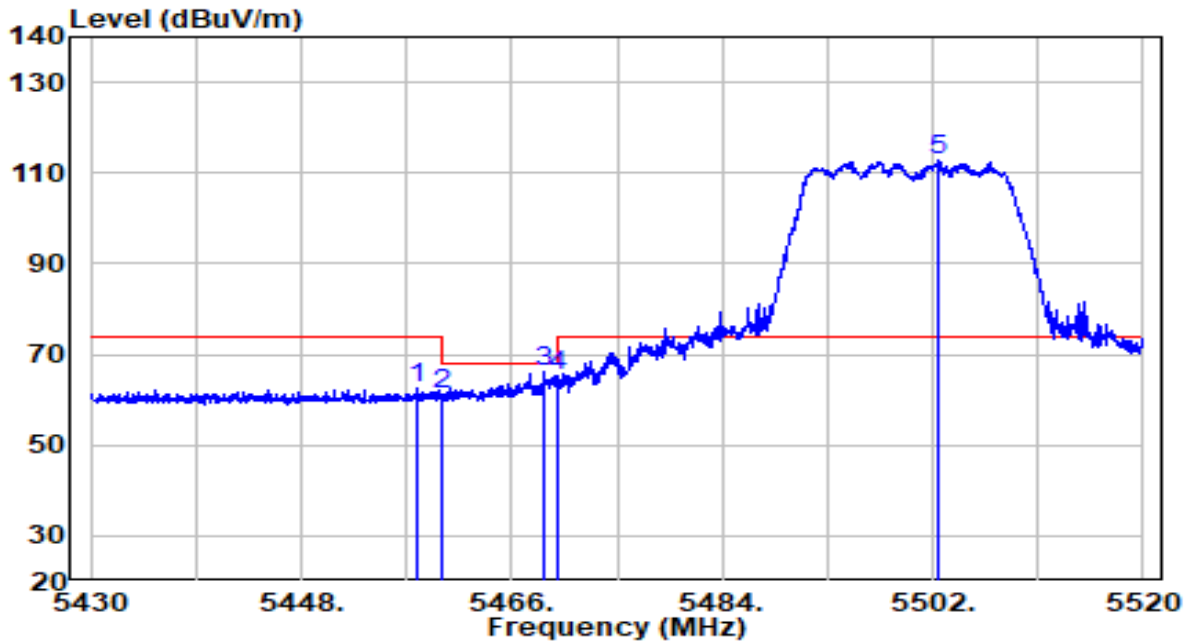


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.990	57.89	4.70	62.59	-11.41	74.00	Peak
2	5460.000	56.72	4.70	61.43	-6.77	68.20	Peak
3	5468.700	61.56	4.72	66.28	-1.92	68.20	Peak
4	5470.000	60.45	4.72	65.17	-3.03	68.20	Peak
5	* 5502.405	107.87	4.78	112.65	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	120V/60Hz

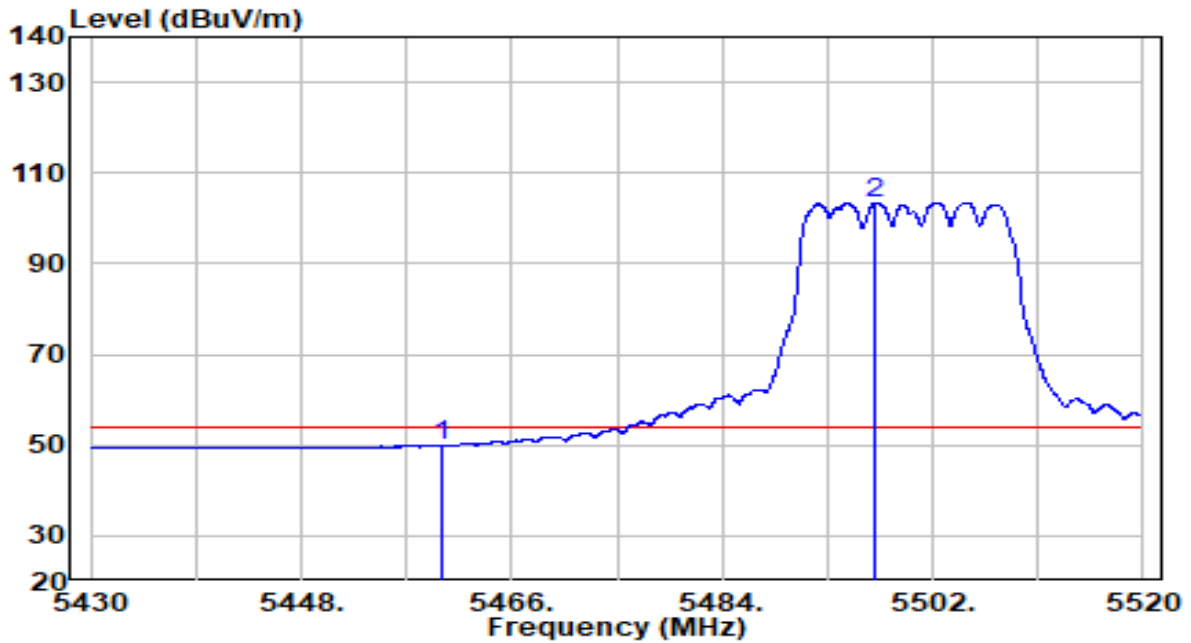


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	45.34	4.70	50.04	-3.96	54.00	Average
2	* 5497.140	98.67	4.77	103.44	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	120V/60Hz

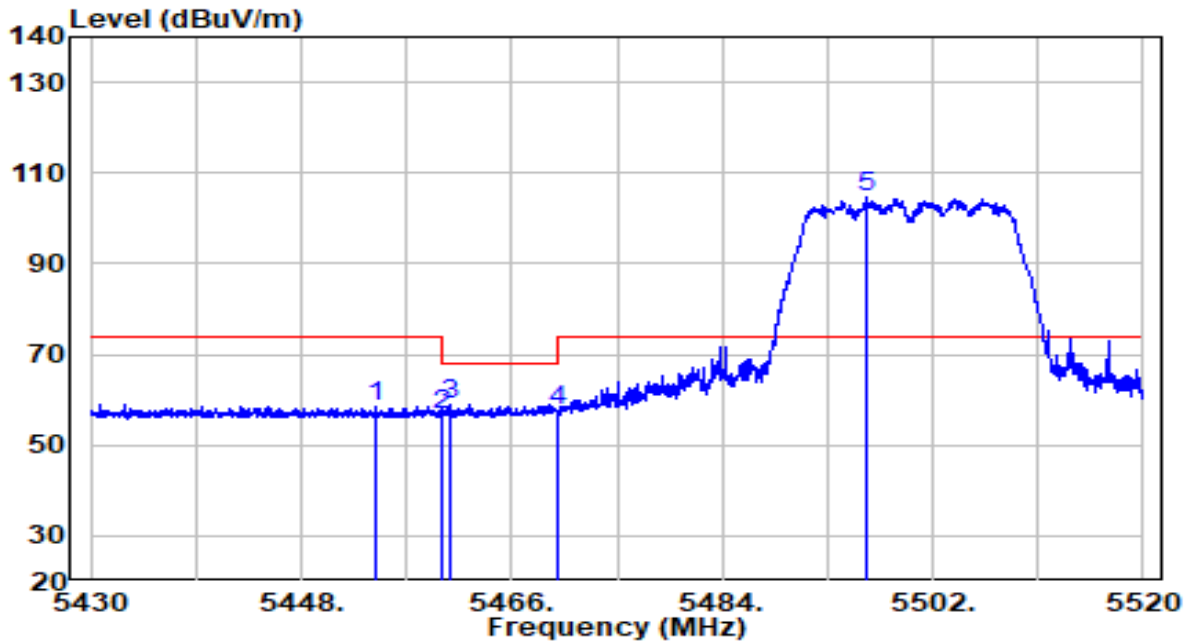


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5454.300	53.94	4.70	58.64	-15.36	74.00	Peak
2	5460.000	51.90	4.70	56.60	-11.60	68.20	Peak
3	5460.780	54.12	4.71	58.83	-9.37	68.20	Peak
4	5470.000	52.65	4.72	57.37	-10.83	68.20	Peak
5	* 5496.285	99.75	4.76	104.51	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	120V/60Hz

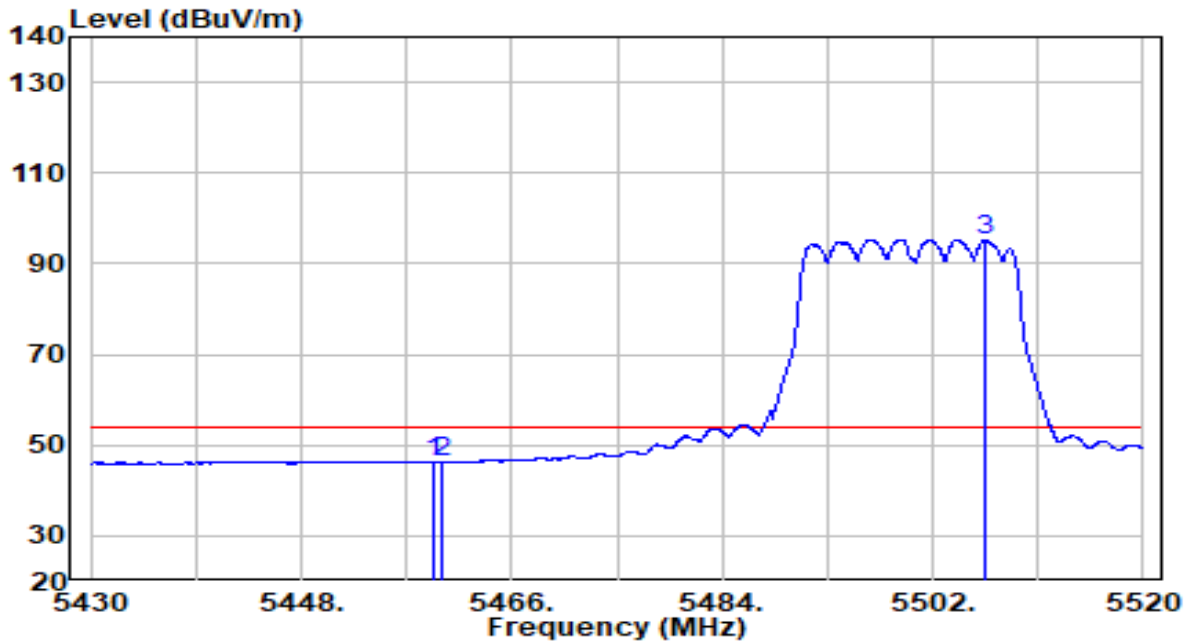


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.250	41.64	4.70	46.34	-7.66	54.00	Average
2	5460.000	41.54	4.70	46.24	-7.76	54.00	Average
3	* 5506.545	90.51	4.79	95.30	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700MHz	Test Voltage	120V/60Hz

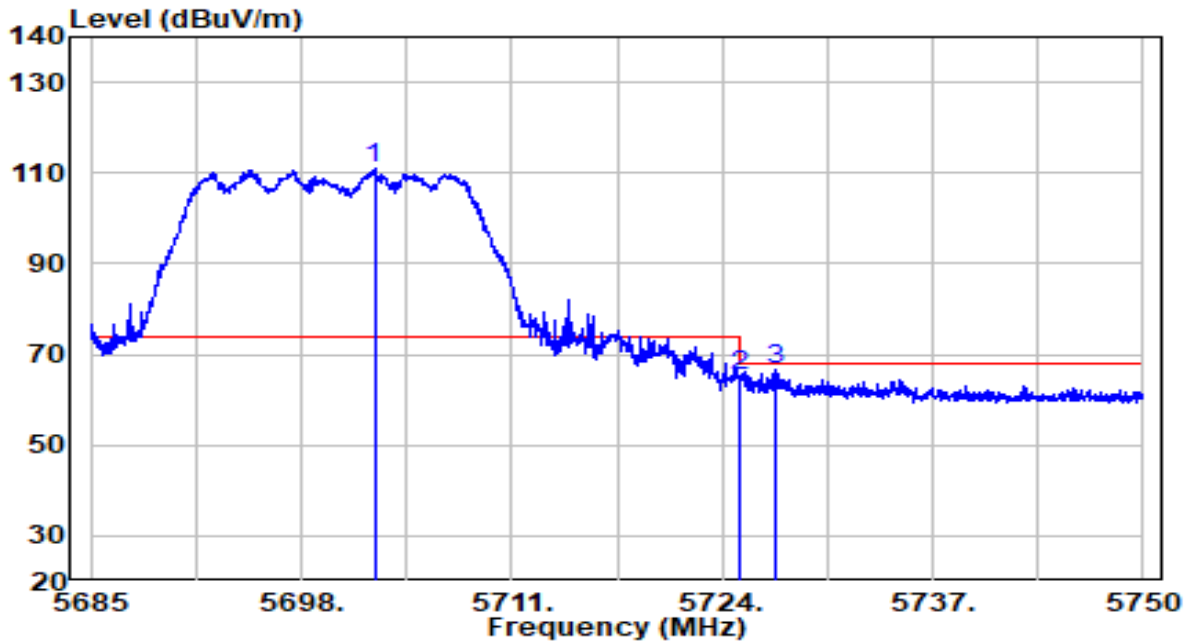


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5702.518	105.32	5.51	110.83	N/A	N/A	Peak
2	5725.000	59.65	5.59	65.24	-2.96	68.20	Peak
3	5727.348	61.00	5.60	66.59	-1.61	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700MHz	Test Voltage	120V/60Hz

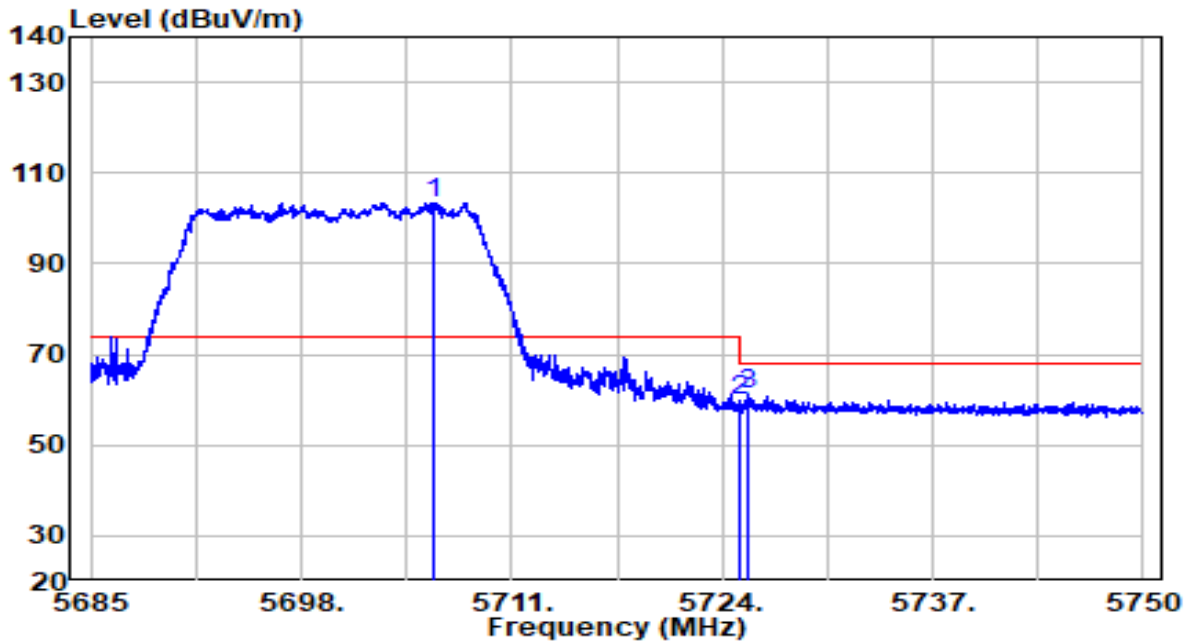


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5706.158	98.01	5.52	103.53	N/A	N/A	Peak
2	5725.000	54.08	5.59	59.67	-8.53	68.20	Peak
3	5725.658	55.41	5.59	61.00	-7.20	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	120V/60Hz

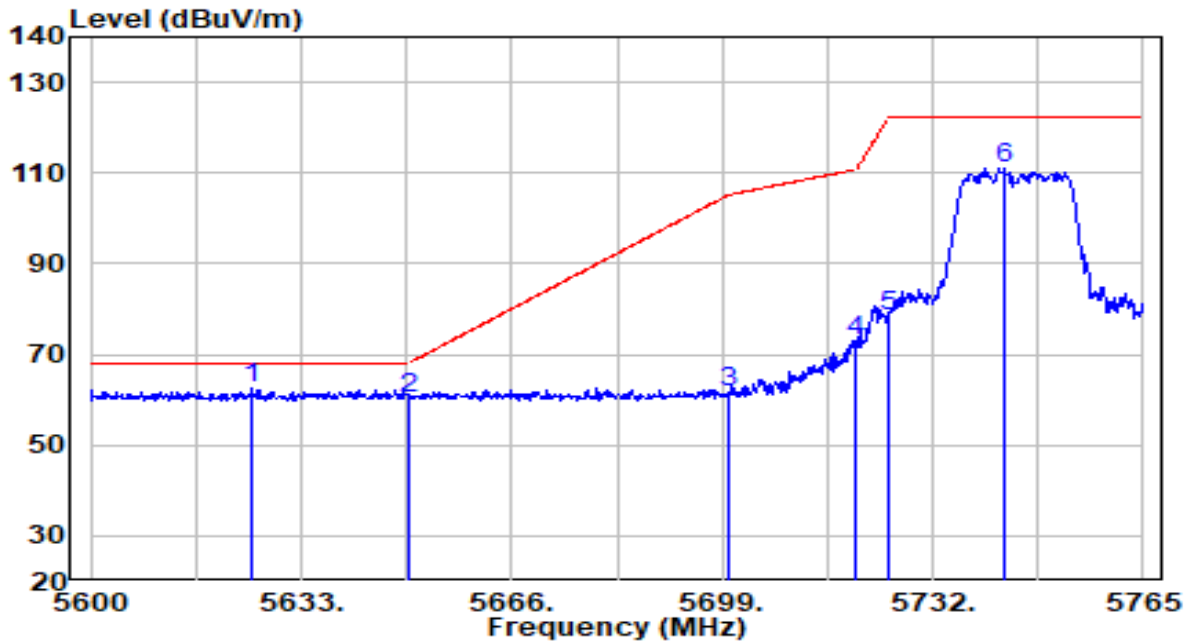


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5625.245	57.33	5.23	62.55	-5.65	68.20	Peak
2	5650.000	55.13	5.32	60.45	-7.75	68.20	Peak
3	5700.000	56.38	5.50	61.88	-43.32	105.20	Peak
4	5720.000	67.39	5.57	72.96	-37.84	110.80	Peak
5	5725.000	72.95	5.59	78.54	-43.66	122.20	Peak
6	5743.220	105.39	5.66	111.05	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	120V/60Hz

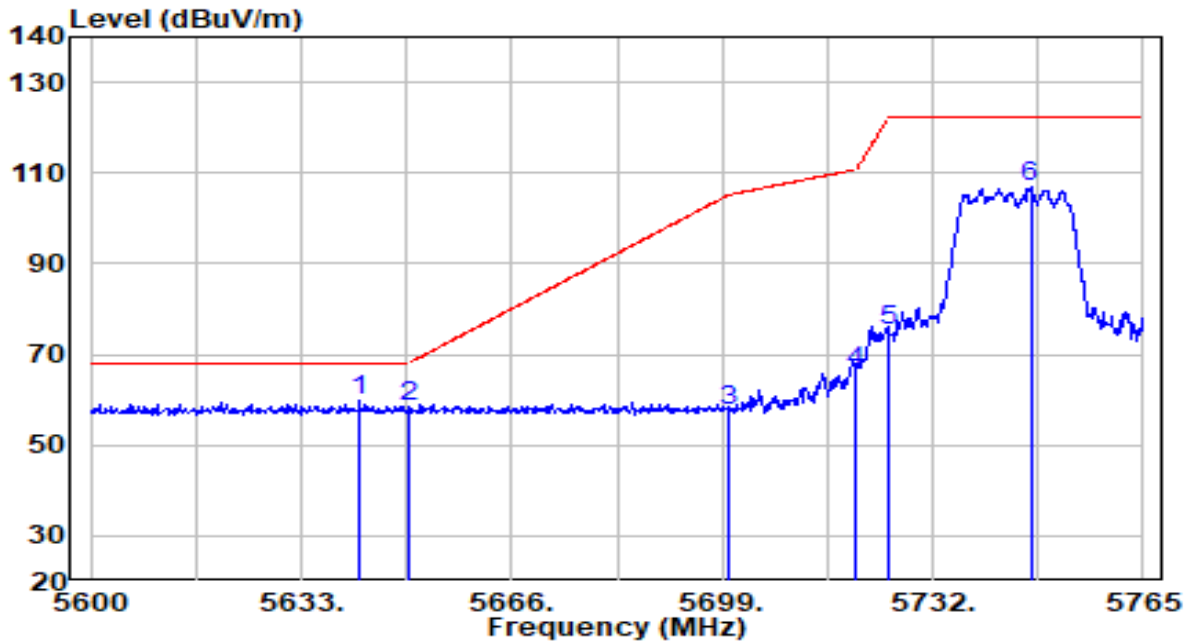


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5642.075	54.48	5.29	59.76	-8.44	68.20	Peak
2	5650.000	53.30	5.32	58.61	-9.59	68.20	Peak
3	5700.000	52.27	5.50	57.77	-47.43	105.20	Peak
4	5720.000	60.53	5.57	66.11	-44.69	110.80	Peak
5	5725.000	69.77	5.59	75.36	-46.84	122.20	Peak
6	5747.345	101.28	5.67	106.95	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	120V/60Hz

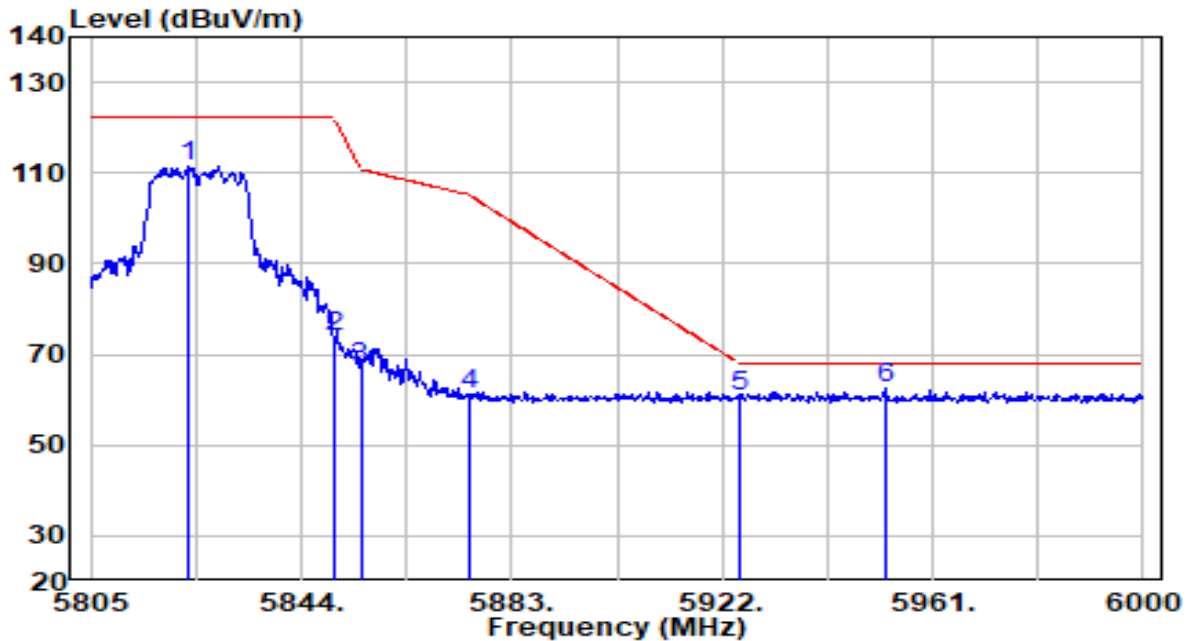


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5823.135	105.40	5.95	111.35	N/A	N/A	Peak
2	5850.000	68.05	6.04	74.09	-48.11	122.20	Peak
3	5855.000	61.00	6.06	67.06	-43.74	110.80	Peak
4	5875.000	54.92	6.13	61.06	-44.14	105.20	Peak
5	5925.000	54.33	6.32	60.65	-7.55	68.20	Peak
6	* 5952.225	56.03	6.42	62.45	-5.75	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	120V/60Hz

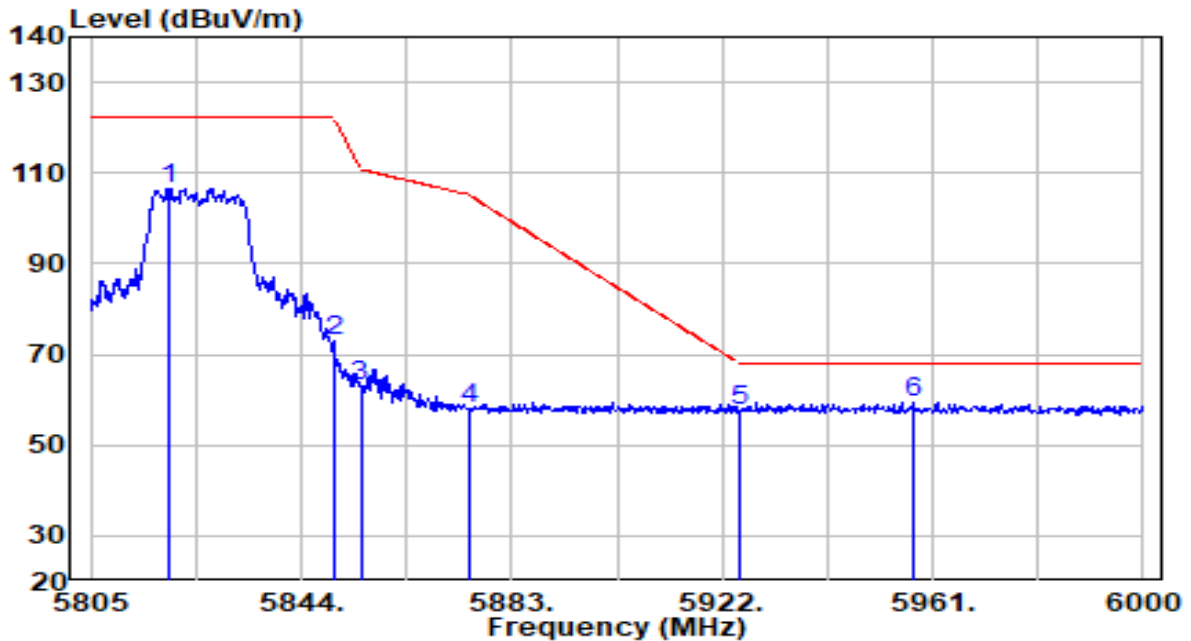


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5819.625	100.69	5.93	106.62	N/A	N/A	Peak
2	5850.000	66.81	6.04	72.86	-49.34	122.20	Peak
3	5855.000	57.06	6.06	63.13	-47.67	110.80	Peak
4	5875.000	51.87	6.13	58.01	-47.19	105.20	Peak
5	5925.000	51.21	6.32	57.53	-10.67	68.20	Peak
6	* 5957.295	52.83	6.43	59.26	-8.94	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120V/60Hz

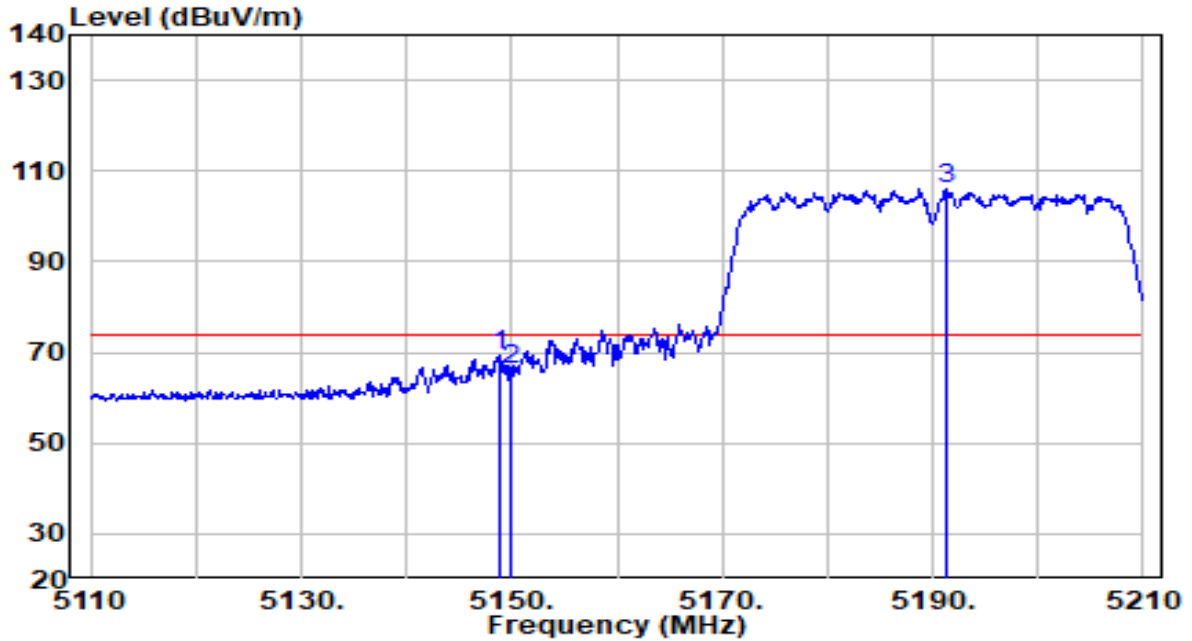


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.800	65.19	4.19	69.38	-4.62	74.00	Peak
2	5150.000	62.04	4.20	66.24	-7.76	74.00	Peak
3	* 5191.200	101.99	4.26	106.26	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120V/60Hz

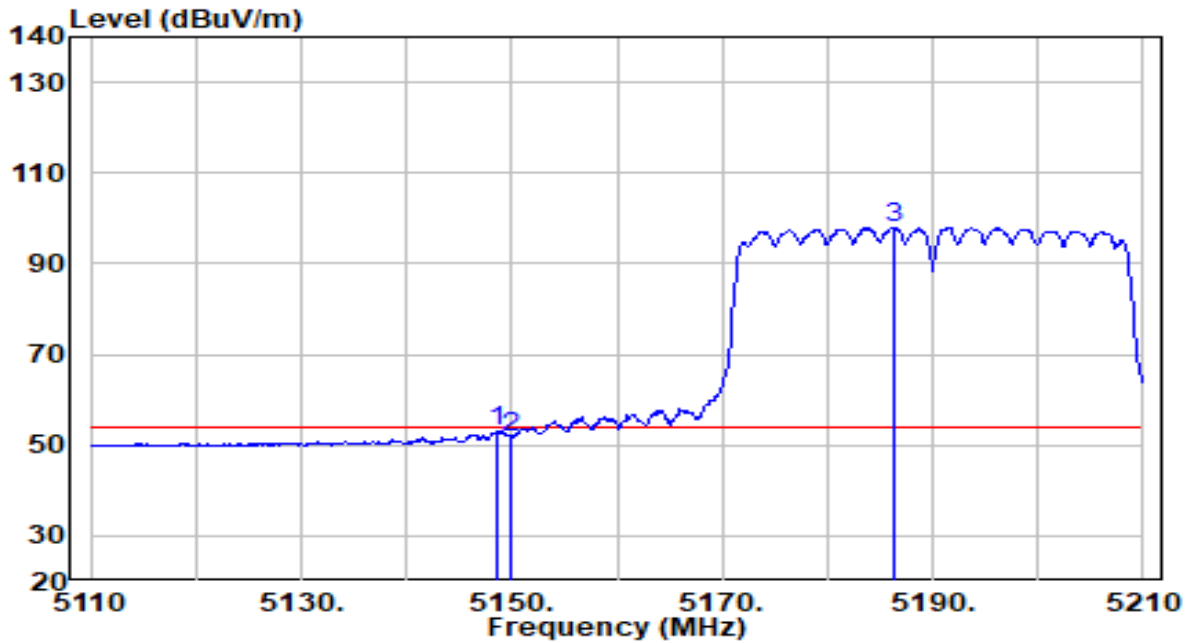


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.700	48.94	4.19	53.14	-0.86	54.00	Average
2	5150.000	47.49	4.20	51.69	-2.31	54.00	Average
3	* 5186.300	93.66	4.26	97.92	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120V/60Hz

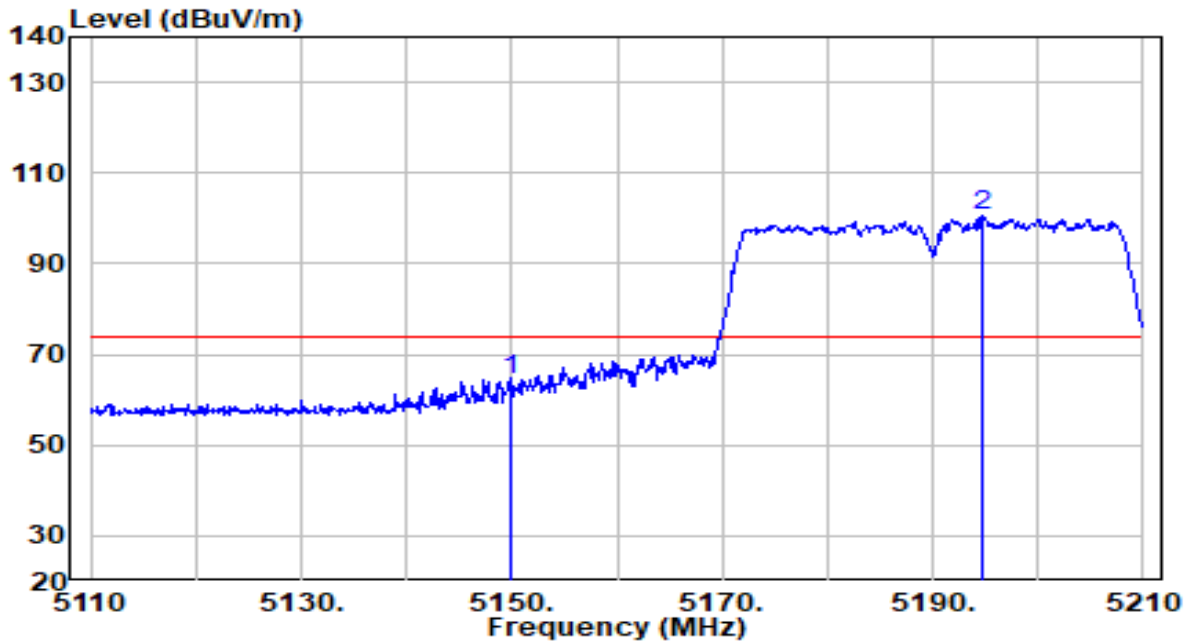


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	60.23	4.20	64.43	-9.57	74.00	Peak
2	* 5194.700	96.43	4.27	100.70	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120V/60Hz

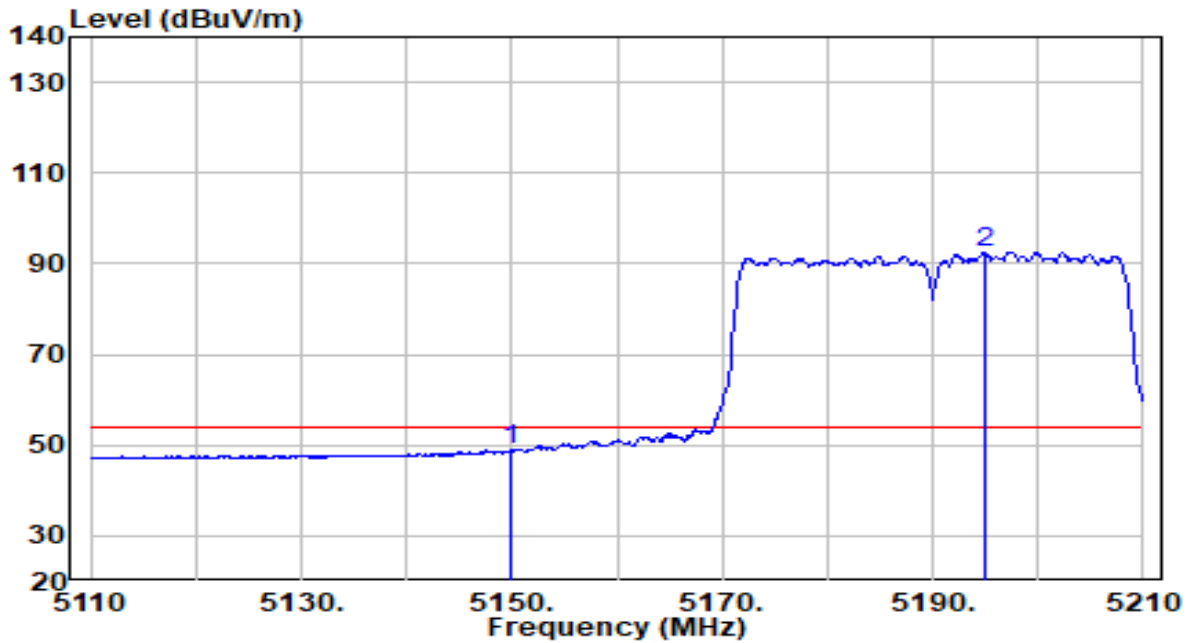


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	44.65	4.20	48.84	-5.16	54.00	Average
2	* 5195.000	88.38	4.27	92.65	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	120V/60Hz

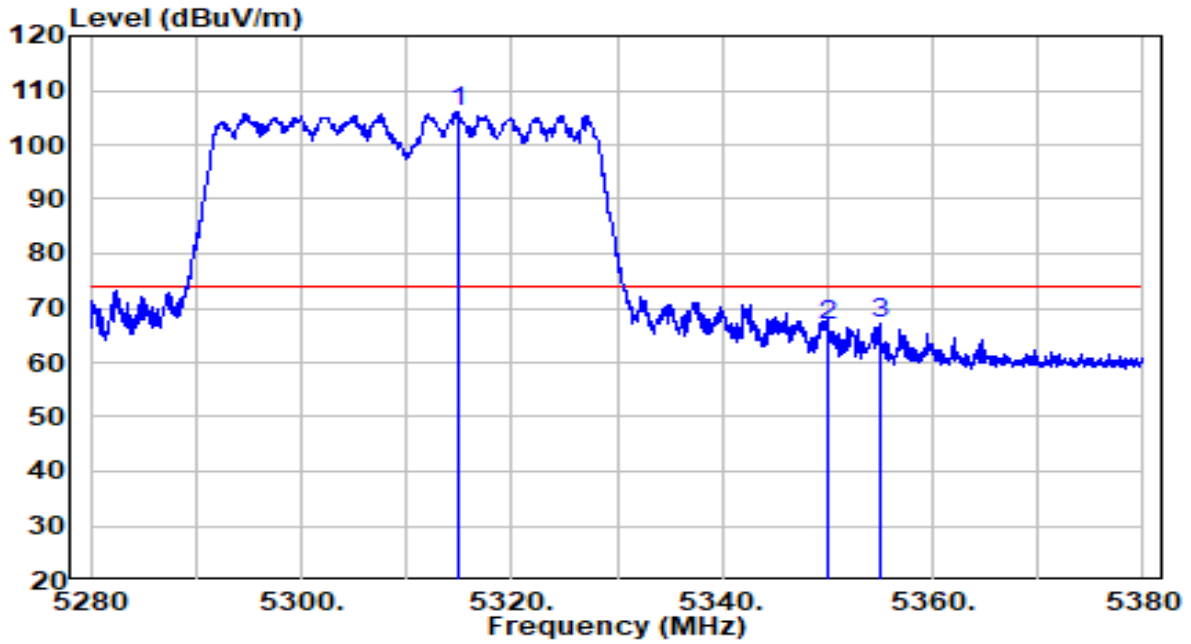


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5314.850	101.49	4.47	105.95	N/A	N/A	Peak
2	5350.000	62.16	4.52	66.69	-7.31	74.00	Peak
3	5354.900	62.54	4.53	67.08	-6.92	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	120V/60Hz

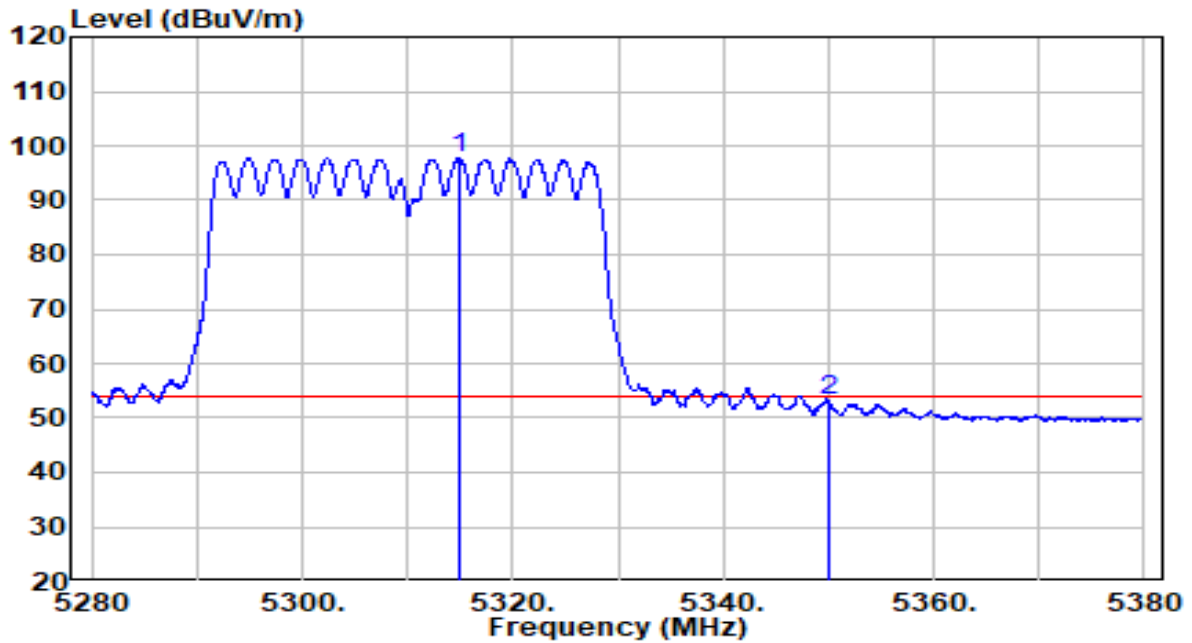


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5314.850	93.20	4.47	97.66	N/A	N/A	Average
2	5350.000	48.60	4.52	53.12	-0.88	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	120V/60Hz

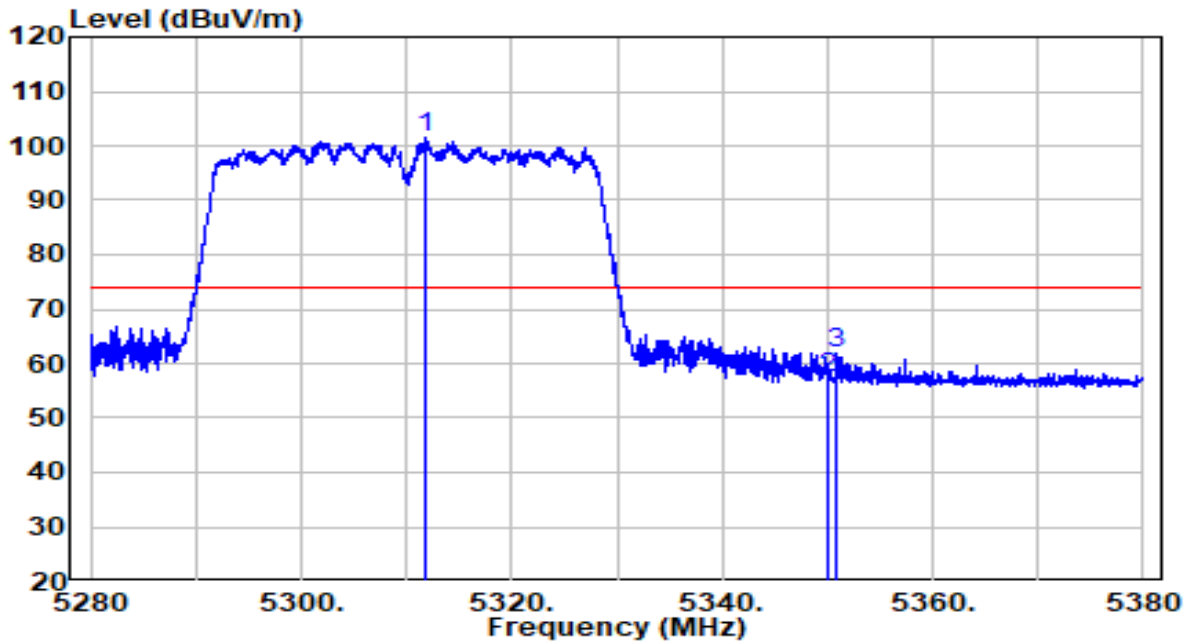


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5311.850	96.95	4.46	101.41	N/A	N/A	Peak
2	5350.000	52.66	4.52	57.19	-16.81	74.00	Peak
3	5350.900	57.19	4.53	61.71	-12.29	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	120V/60Hz

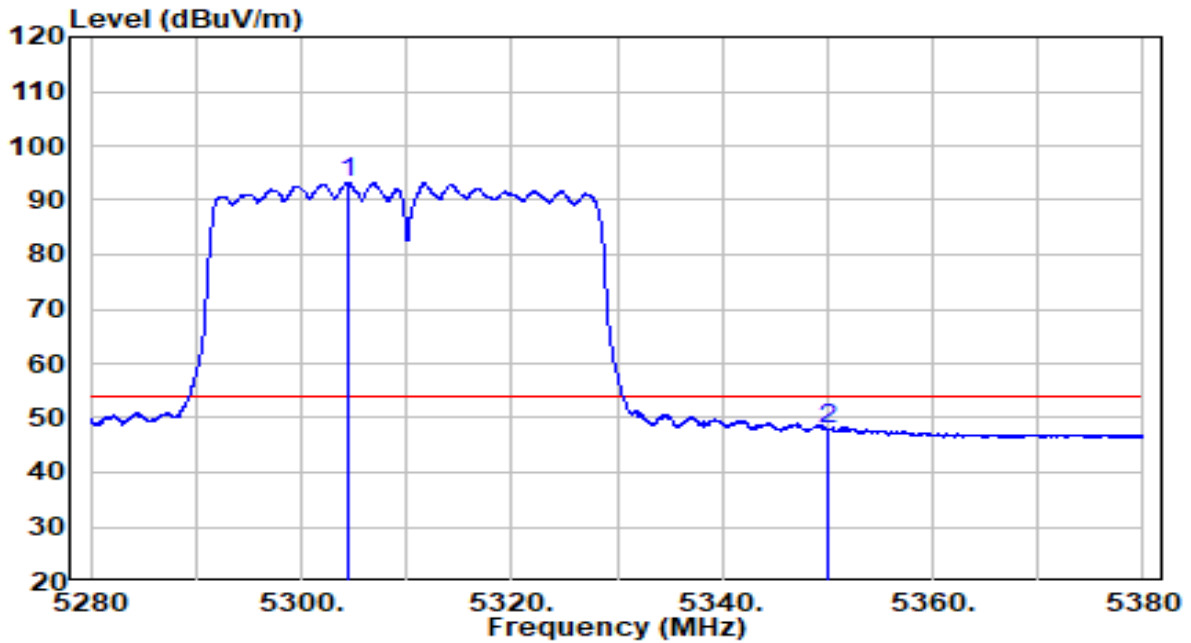


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5304.400	88.68	4.45	93.13	N/A	N/A	Average
2	5350.000	43.28	4.52	47.80	-6.20	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	120V/60Hz

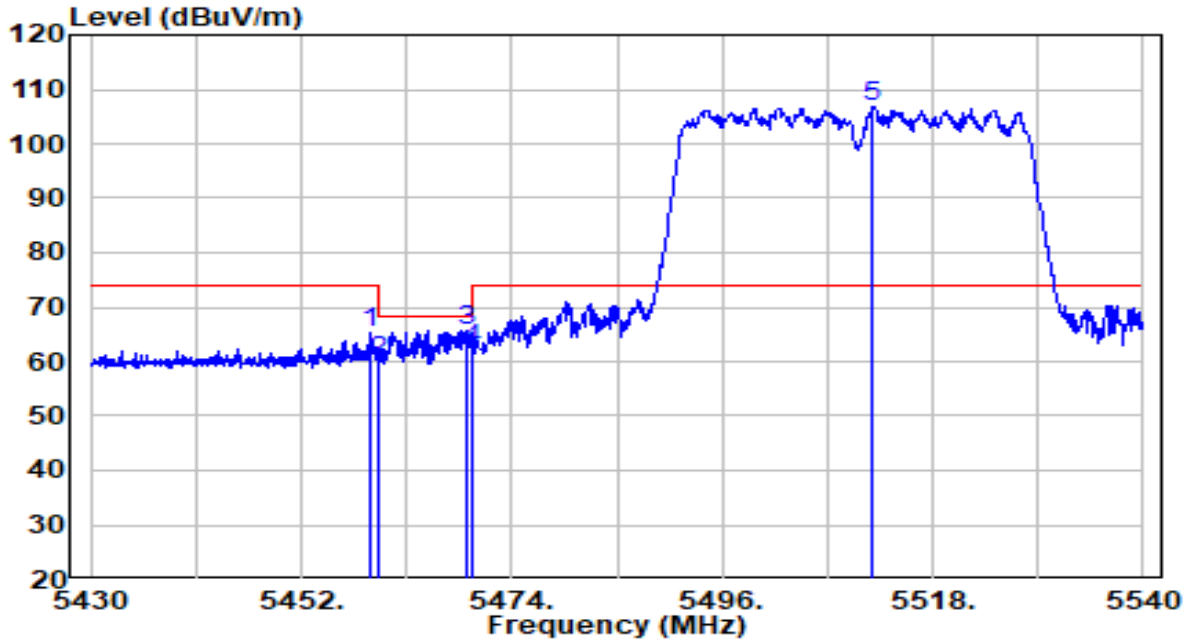


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.315	60.65	4.70	65.35	-8.65	74.00	Peak
2	5460.000	55.40	4.70	60.10	-8.10	68.20	Peak
3	5469.390	60.80	4.72	65.52	-2.68	68.20	Peak
4	5470.000	57.63	4.72	62.35	-5.85	68.20	Peak
5	* 5511.770	102.04	4.81	106.85	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	120V/60Hz

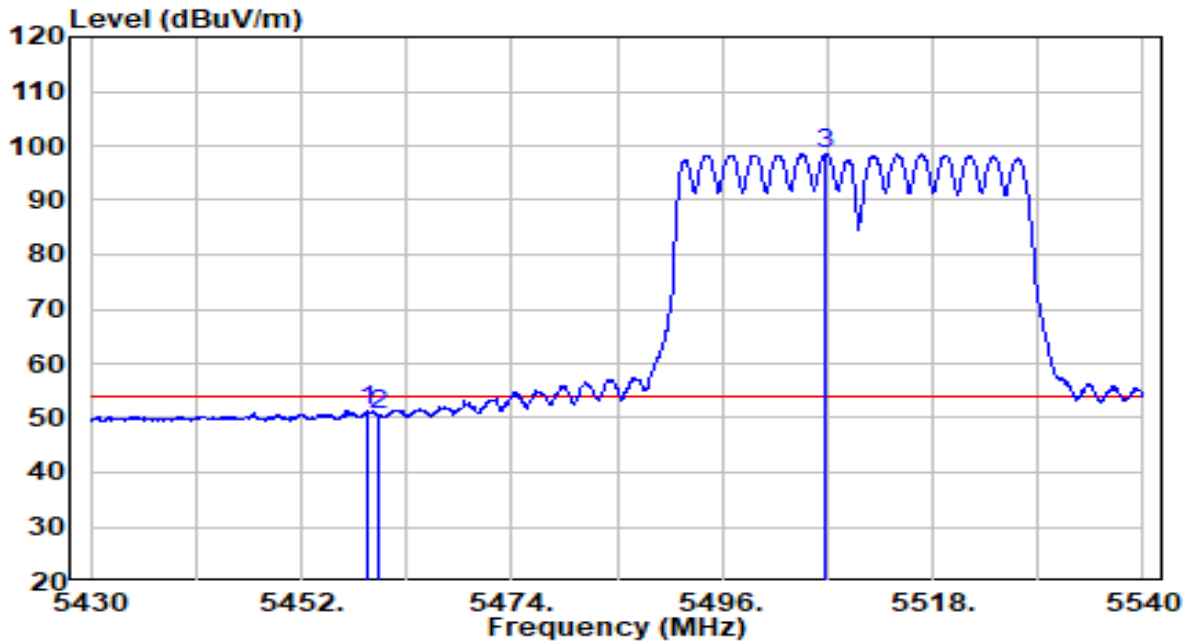


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.990	46.59	4.70	51.29	-2.71	54.00	Average
2	5460.000	45.83	4.70	50.53	-3.47	54.00	Average
3	* 5506.830	93.70	4.79	98.49	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	120V/60Hz

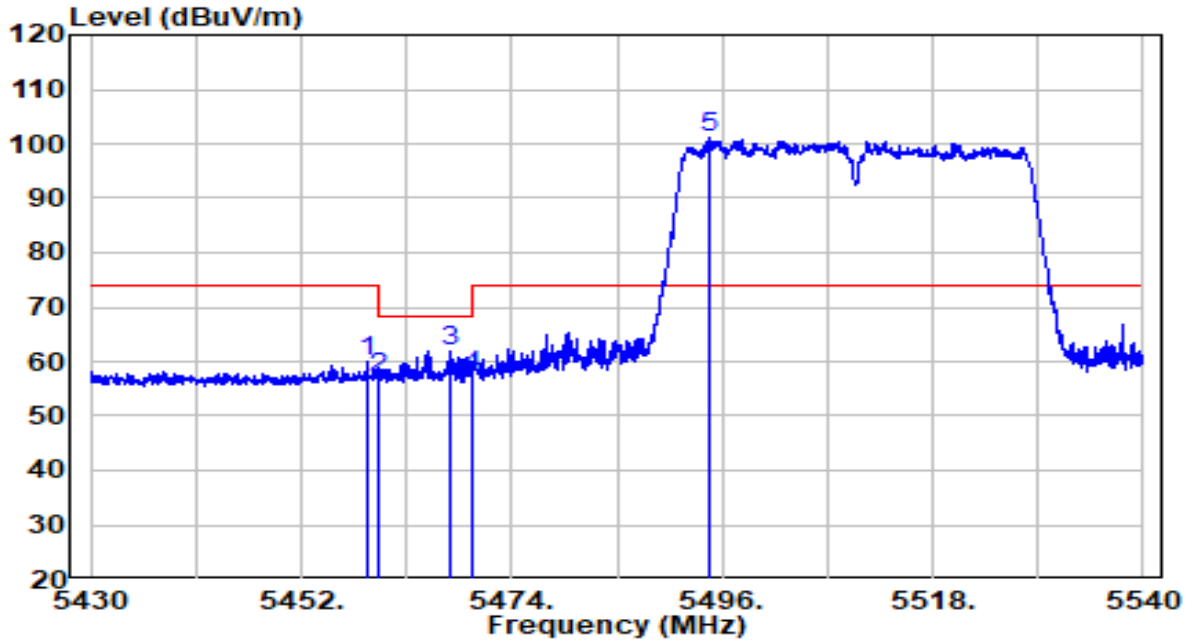


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.990	55.19	4.70	59.89	-14.11	74.00	Peak
2	5460.000	52.37	4.70	57.07	-11.13	68.20	Peak
3	5467.700	57.22	4.72	61.94	-6.26	68.20	Peak
4	5470.000	52.76	4.72	57.49	-10.71	68.20	Peak
5	* 5494.675	96.34	4.76	101.10	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	120V/60Hz

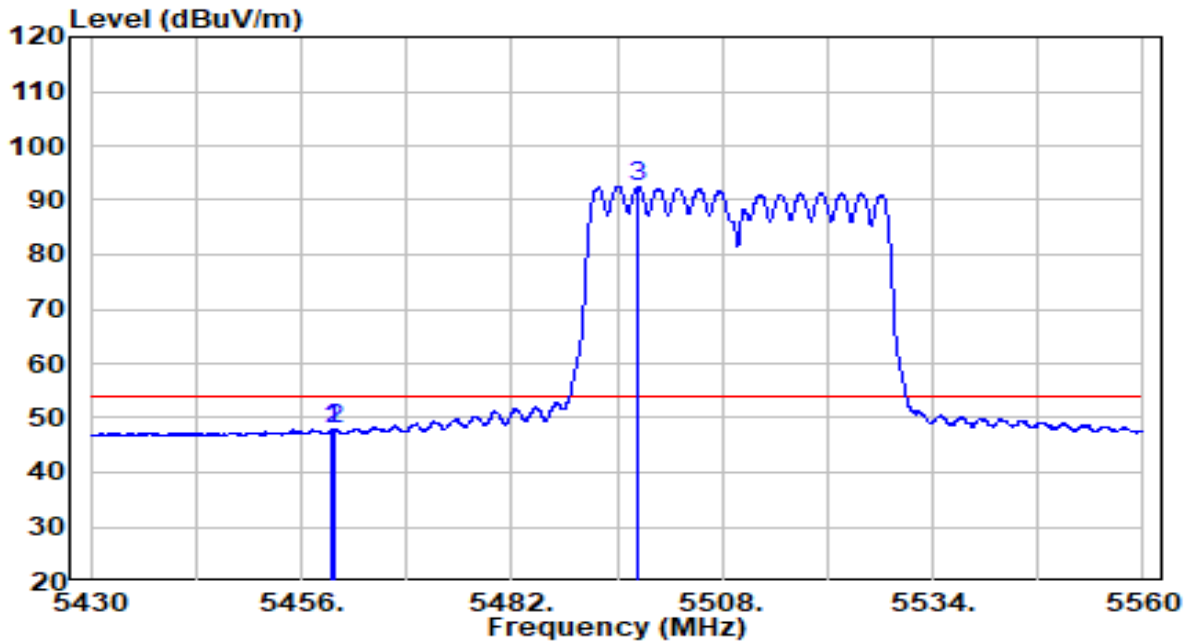


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.835	43.31	4.70	48.01	-5.99	54.00	Average
2	5460.000	43.19	4.70	47.89	-6.11	54.00	Average
3	* 5497.665	87.83	4.77	92.60	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	120V/60Hz

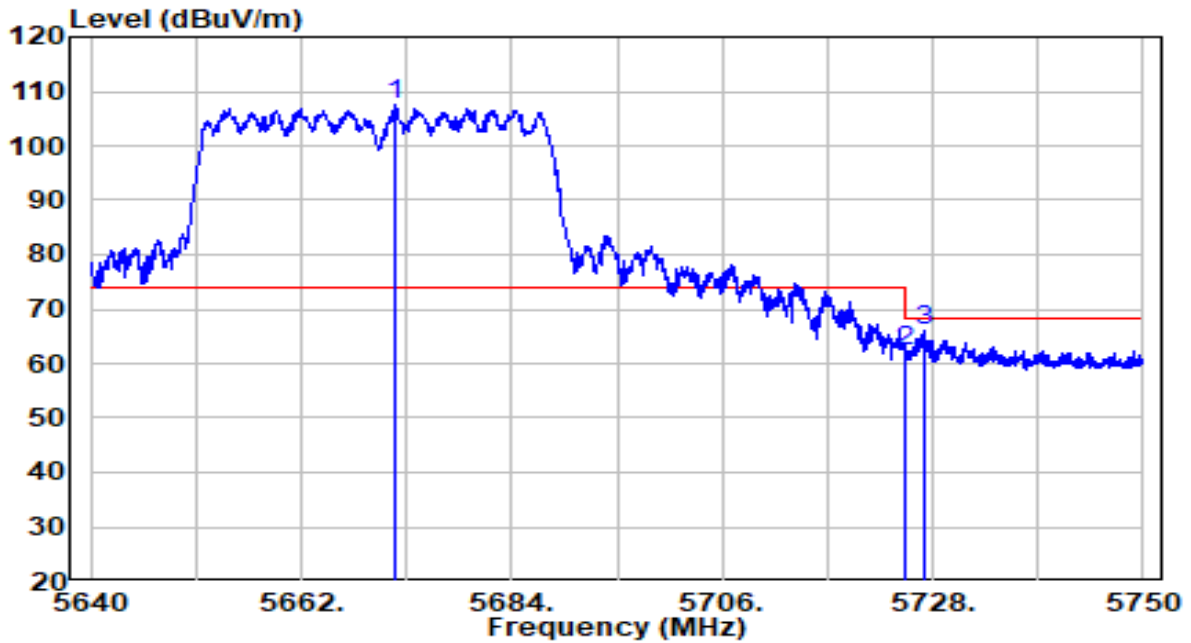


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5671.790	102.01	5.40	107.40	N/A	N/A	Peak
2	5725.000	56.75	5.59	62.34	-5.86	68.20	Peak
3	5727.065	60.32	5.60	65.91	-2.29	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	120V/60Hz

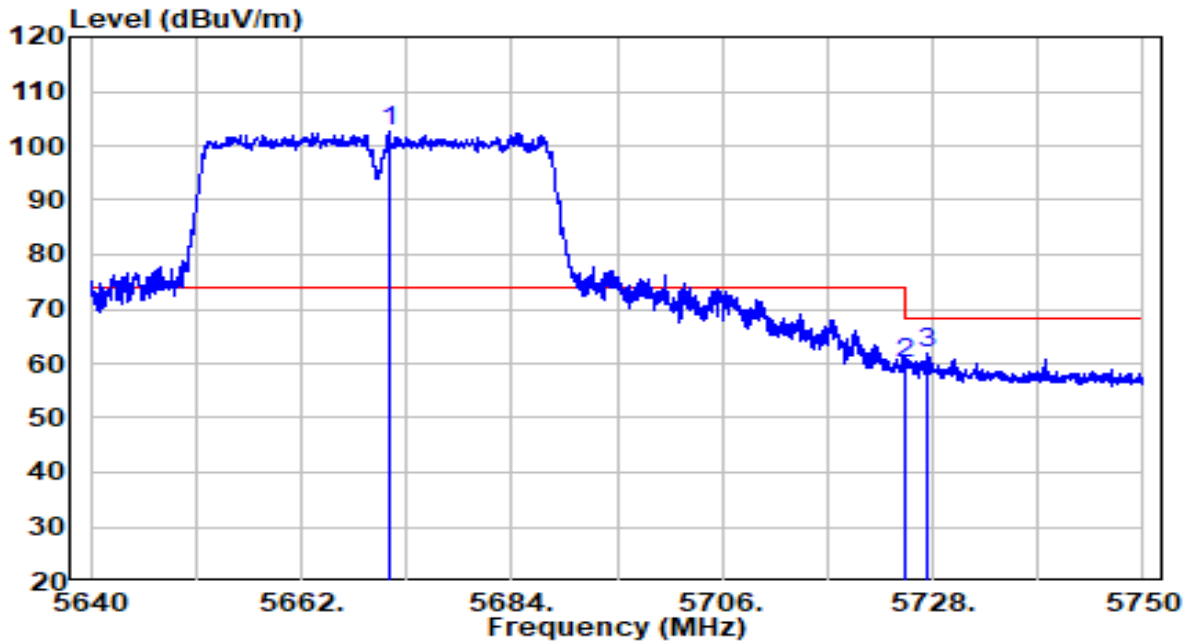


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5671.295	97.17	5.39	102.56	N/A	N/A	Average
2	5725.000	54.42	5.59	60.01	-8.19	68.20	Average
3	5727.560	56.35	5.60	61.95	-6.25	68.20	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	120V/60Hz

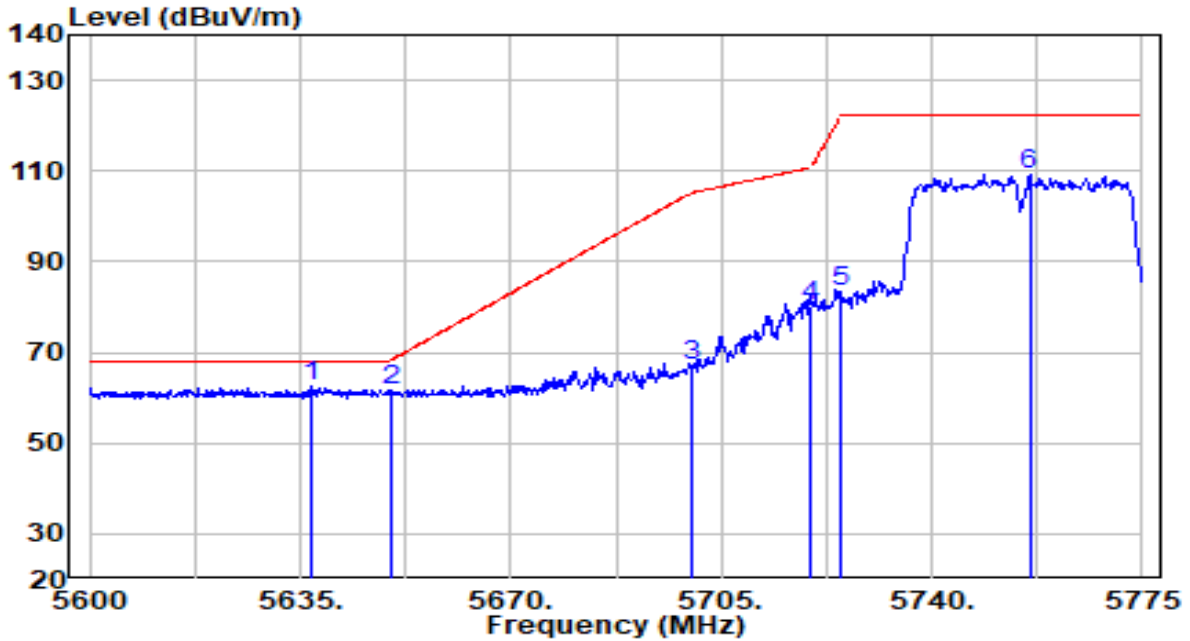


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5636.750	57.24	5.27	62.51	-5.69	68.20	Peak
2	5650.050	56.38	5.32	61.70	-6.54	68.24	Peak
3	5700.000	61.57	5.50	67.06	-38.14	105.20	Peak
4	5720.000	74.68	5.57	80.25	-30.55	110.80	Peak
5	5725.000	77.89	5.59	83.48	-38.72	122.20	Peak
6	5756.275	103.39	5.70	109.09	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	120V/60Hz

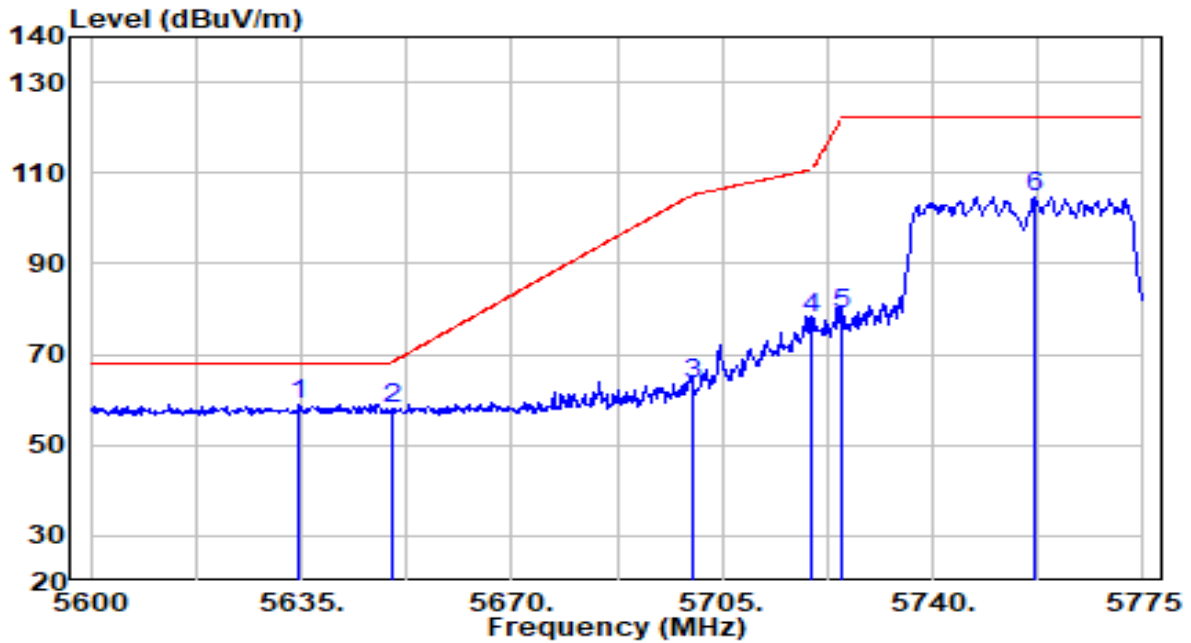


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5634.650	53.83	5.26	59.09	-9.11	68.20	Peak
2	5650.000	52.65	5.32	57.97	-10.23	68.20	Peak
3	5700.000	57.94	5.50	63.44	-41.76	105.20	Peak
4	5720.000	72.43	5.57	78.00	-32.80	110.80	Peak
5	5725.000	73.43	5.59	79.02	-43.18	122.20	Peak
6	5756.800	99.06	5.70	104.77	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	120V/60Hz

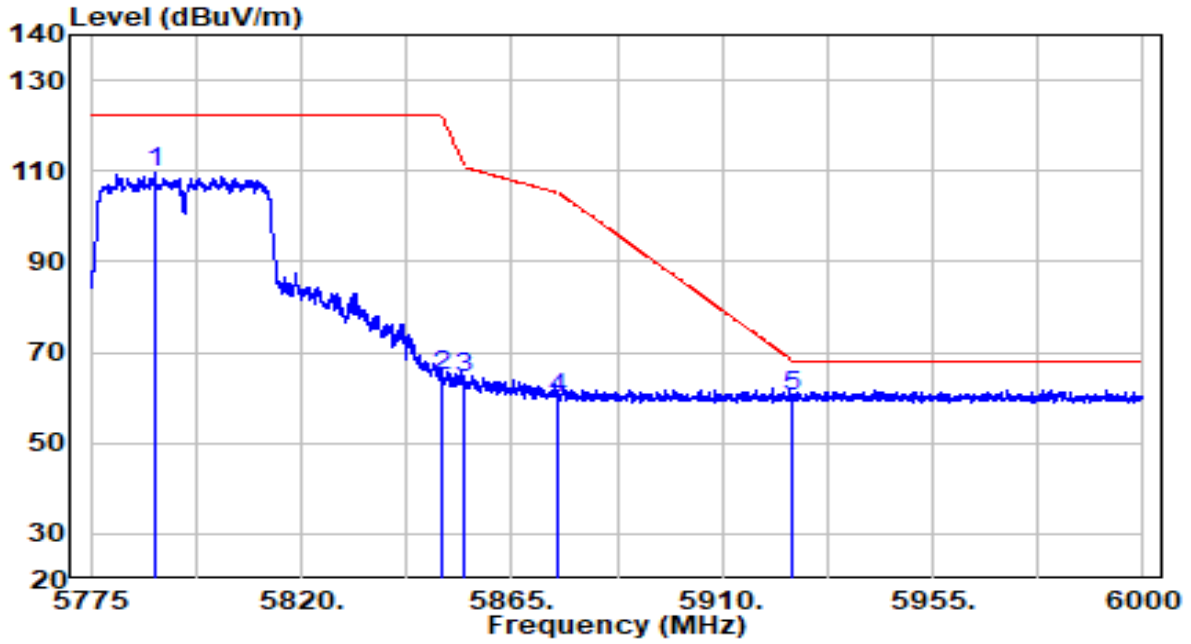


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5788.725	103.73	5.82	109.55	N/A	N/A	Peak
2	5850.000	58.63	6.04	64.67	-57.53	122.20	Peak
3	5855.000	58.37	6.06	64.44	-46.36	110.80	Peak
4	5875.000	53.53	6.13	59.67	-45.53	105.20	Peak
5	* 5925.000	54.19	6.32	60.50	-7.70	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	120V/60Hz

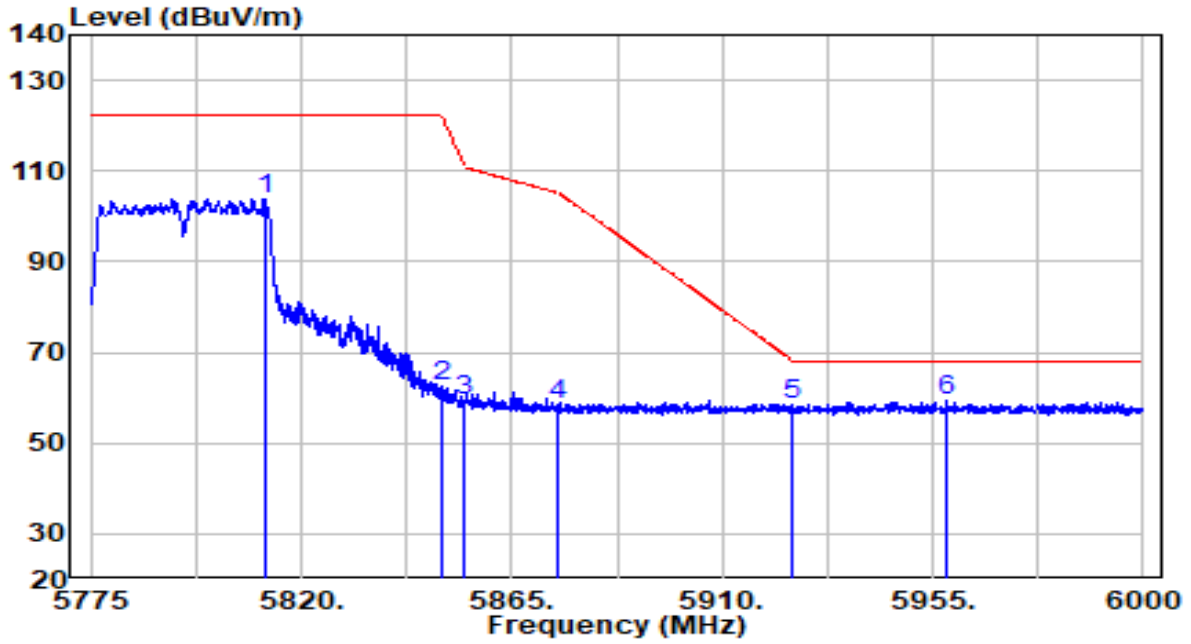


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5812.125	97.97	5.91	103.87	N/A	N/A	Peak
2	5850.000	56.49	6.04	62.53	-59.67	122.20	Peak
3	5855.000	53.28	6.06	59.34	-51.46	110.80	Peak
4	5875.000	52.32	6.13	58.46	-46.74	105.20	Peak
5	5925.000	51.96	6.32	58.28	-9.92	68.20	Peak
6	* 5958.150	53.06	6.44	59.50	-8.70	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	120V/60Hz

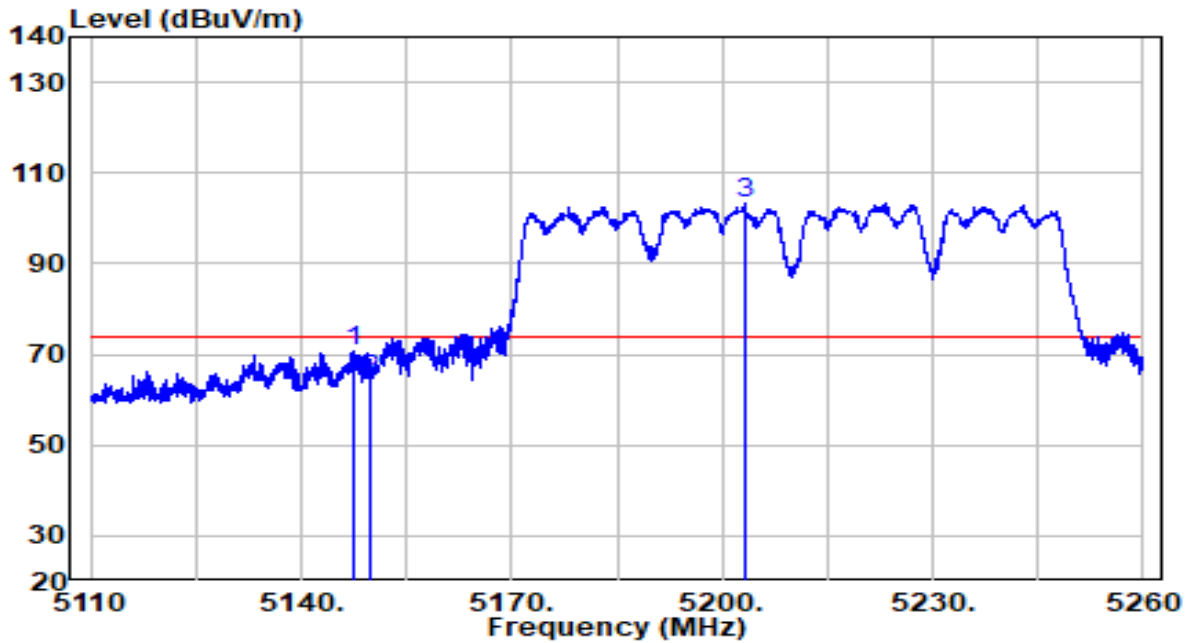


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.350	66.41	4.19	70.60	-3.40	74.00	Peak
2	5150.000	60.40	4.20	64.60	-9.40	74.00	Peak
3	* 5203.150	98.86	4.28	103.14	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	120V/60Hz

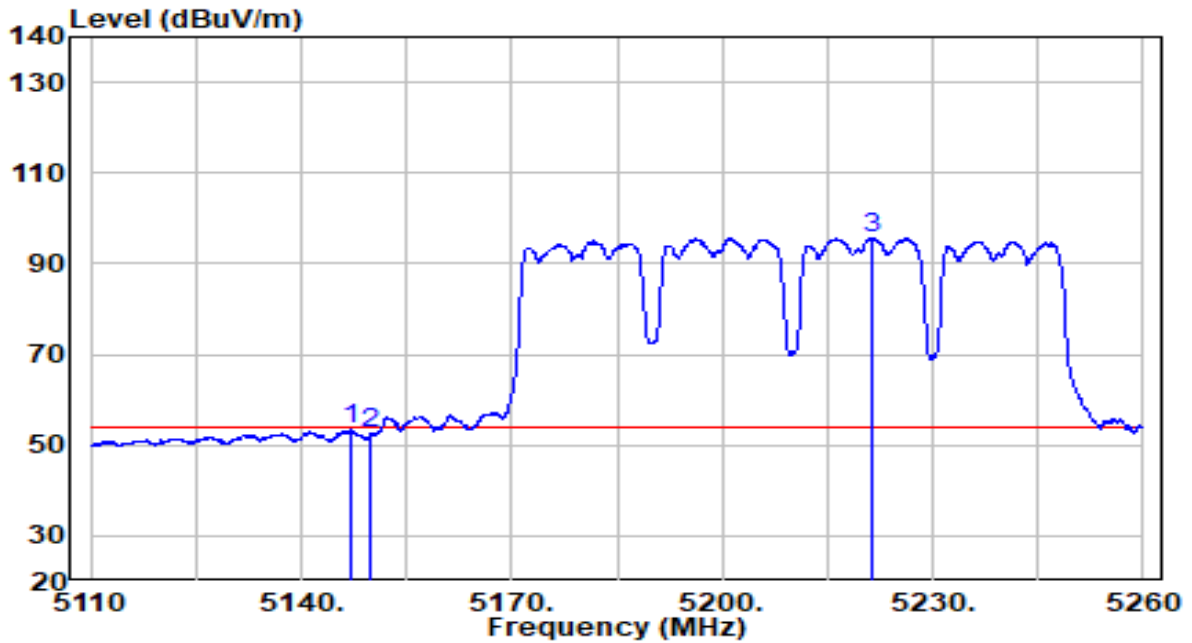


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.125	49.12	4.19	53.31	-0.69	54.00	Average
2	5150.000	48.20	4.20	52.40	-1.60	54.00	Average
3	* 5221.525	91.42	4.31	95.73	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	120V/60Hz

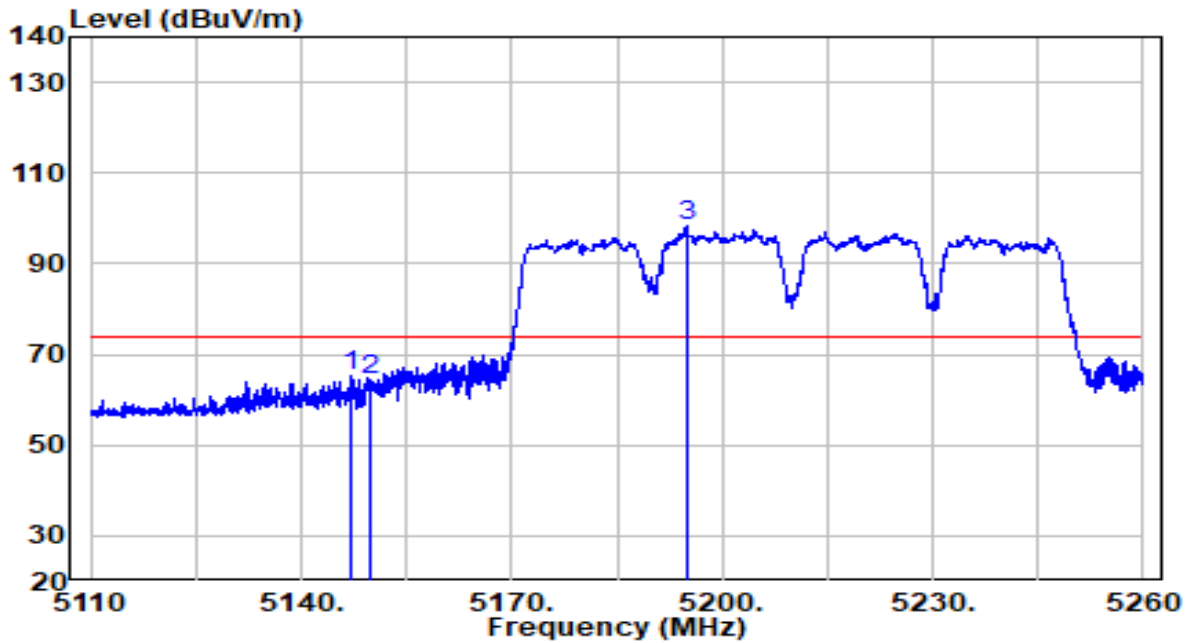


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.200	60.93	4.19	65.12	-8.88	74.00	Peak
2	5150.000	60.10	4.20	64.29	-9.71	74.00	Peak
3	* 5194.975	94.14	4.27	98.41	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	120V/60Hz

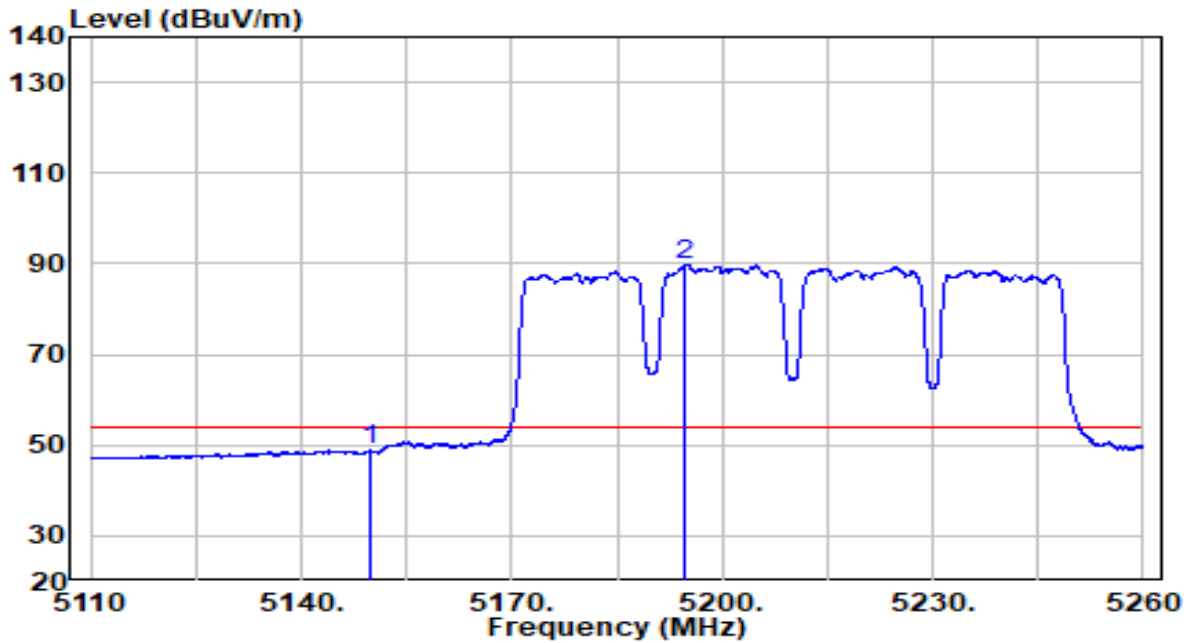


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	44.59	4.20	48.79	-5.21	54.00	Average
2	* 5194.750	85.66	4.27	89.93	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	120V/60Hz

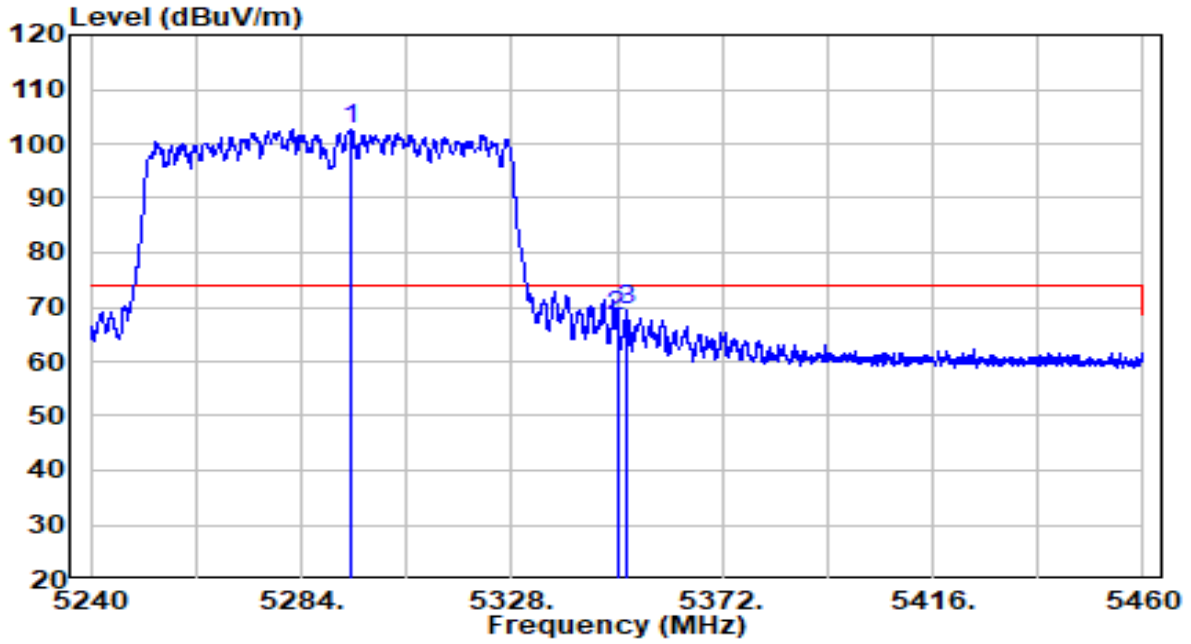


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5294.670	98.11	4.43	102.54	N/A	N/A	Peak
2	5350.000	63.69	4.52	68.22	-5.78	74.00	Peak
3	5351.870	65.05	4.53	69.57	-4.43	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	120V/60Hz

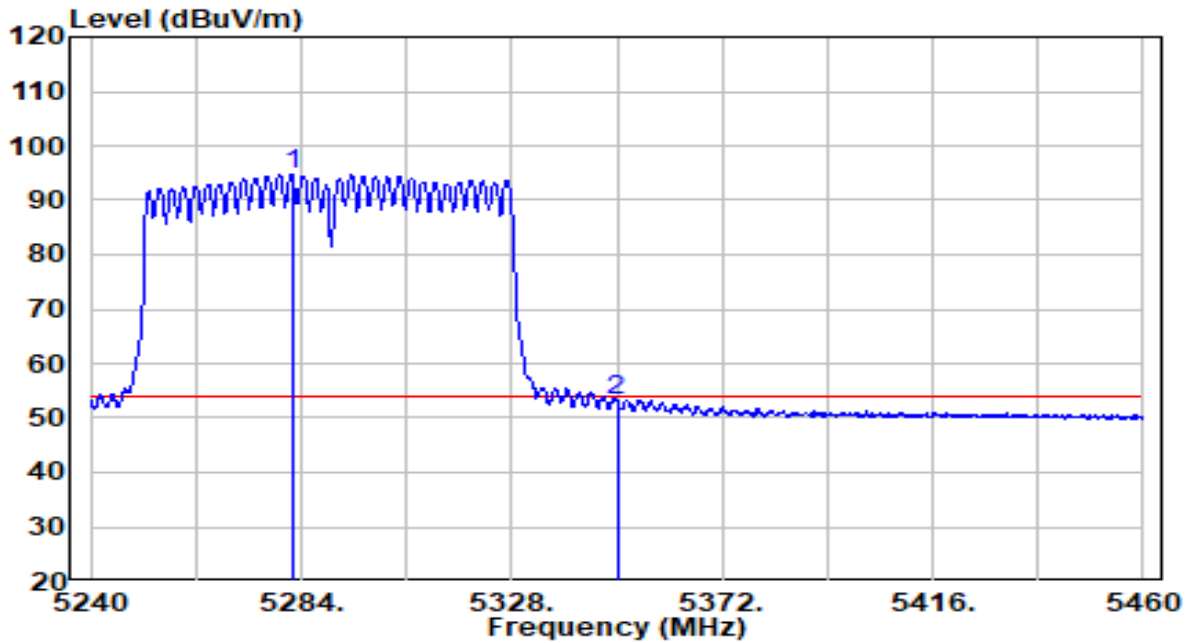


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5282.020	90.27	4.41	94.68	N/A	N/A	Average
2	5350.000	48.84	4.52	53.37	-0.63	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	120V/60Hz

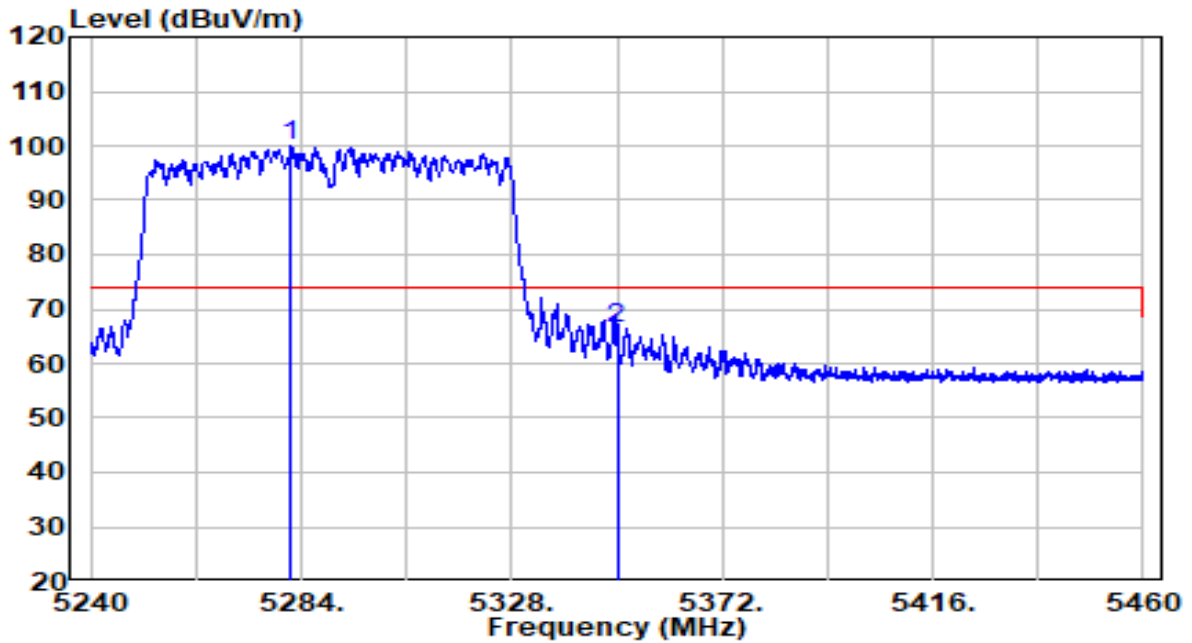


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5281.910	95.65	4.41	100.07	N/A	N/A	Peak
2	5350.000	62.06	4.52	66.59	-7.41	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	120V/60Hz

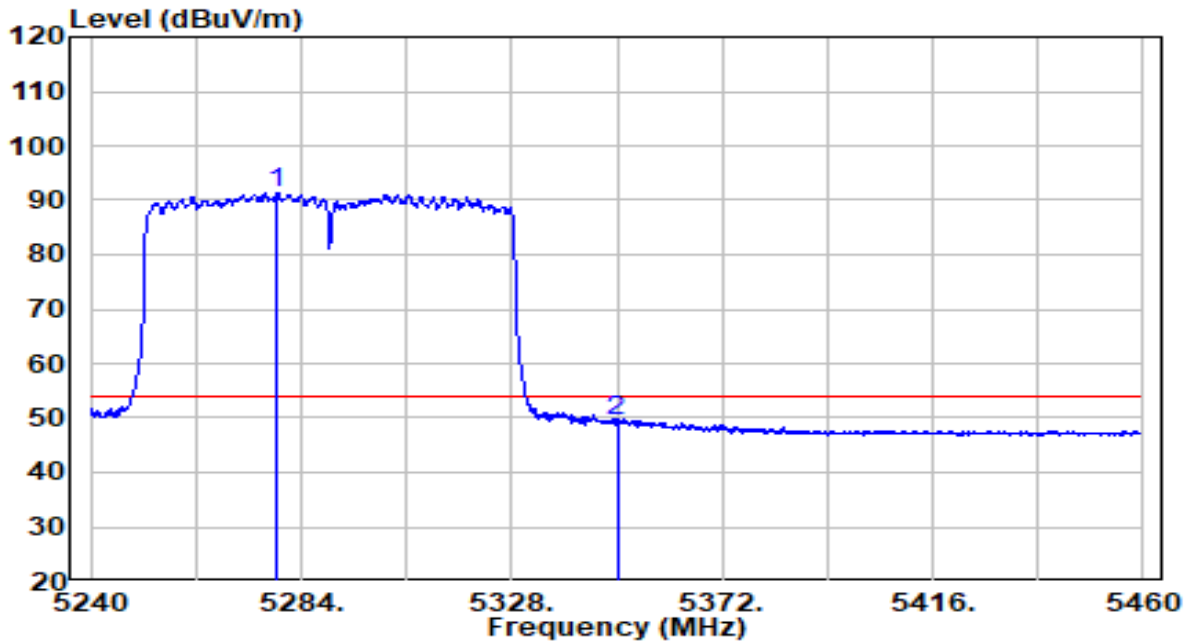


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5278.940	87.05	4.41	91.46	N/A	N/A	Average
2	5350.000	45.08	4.52	49.60	-4.40	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	120V/60Hz

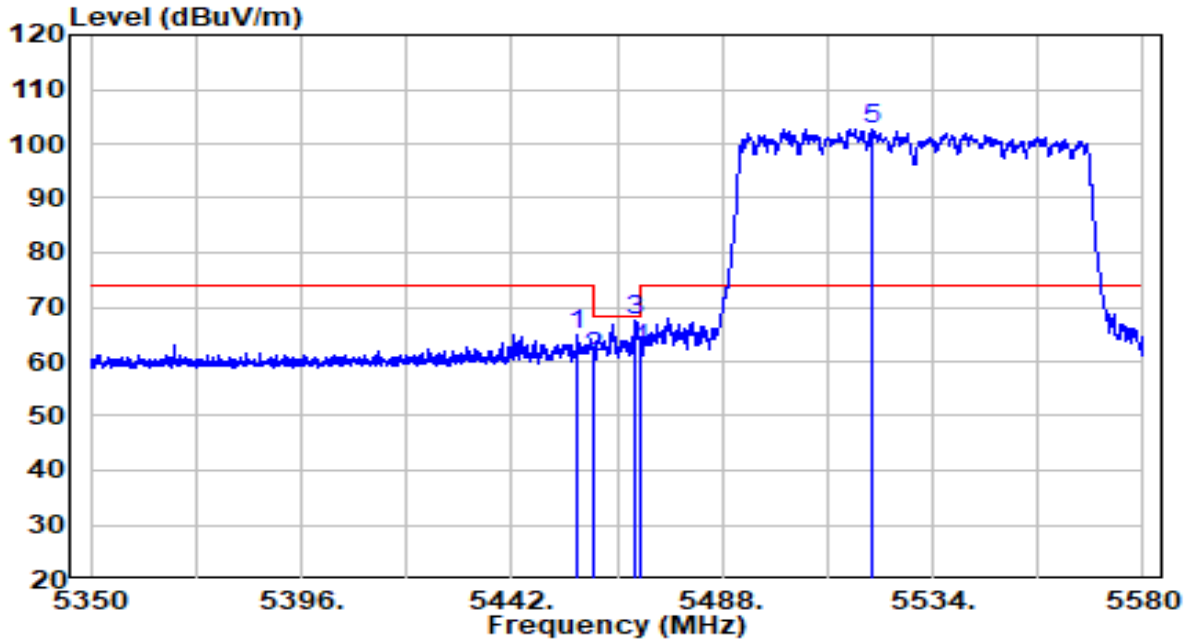


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.375	60.05	4.70	64.75	-9.25	74.00	Peak
2	5460.000	56.24	4.70	60.94	-7.26	68.20	Peak
3	5468.910	63.02	4.72	67.73	-0.47	68.20	Peak
4	5470.000	57.54	4.72	62.26	-5.94	68.20	Peak
5	* 5520.775	97.90	4.85	102.75	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	120V/60Hz

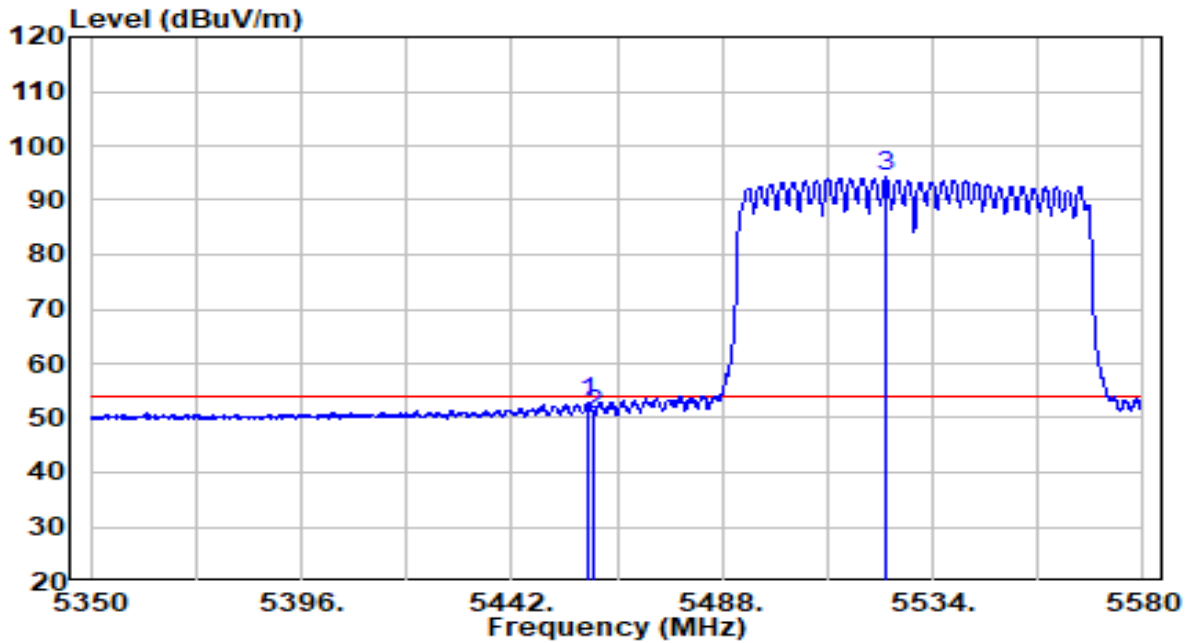


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.905	48.24	4.70	52.94	-1.06	54.00	Average
2	5460.000	46.00	4.70	50.71	-3.29	54.00	Average
3	* 5523.880	89.41	4.86	94.27	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	120V/60Hz

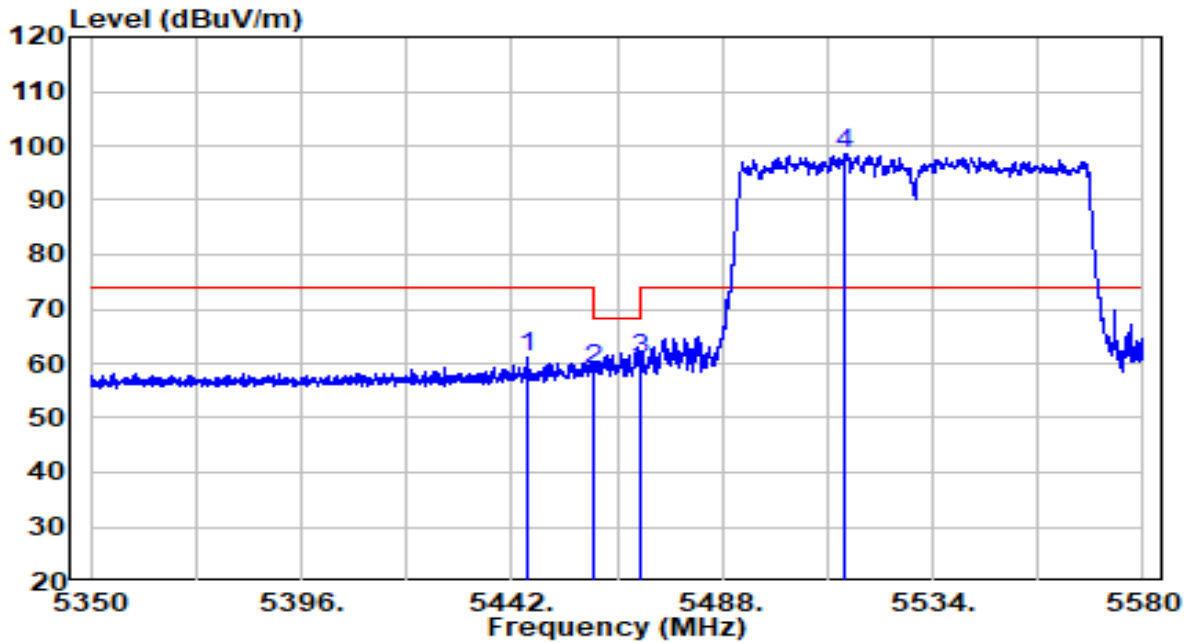


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5445.450	56.52	4.68	61.20	-12.80	74.00	Peak
2	5460.000	54.22	4.70	58.93	-9.27	68.20	Peak
3	5470.000	56.18	4.72	60.90	-7.30	68.20	Peak
4	* 5514.795	93.63	4.82	98.46	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	120V/60Hz

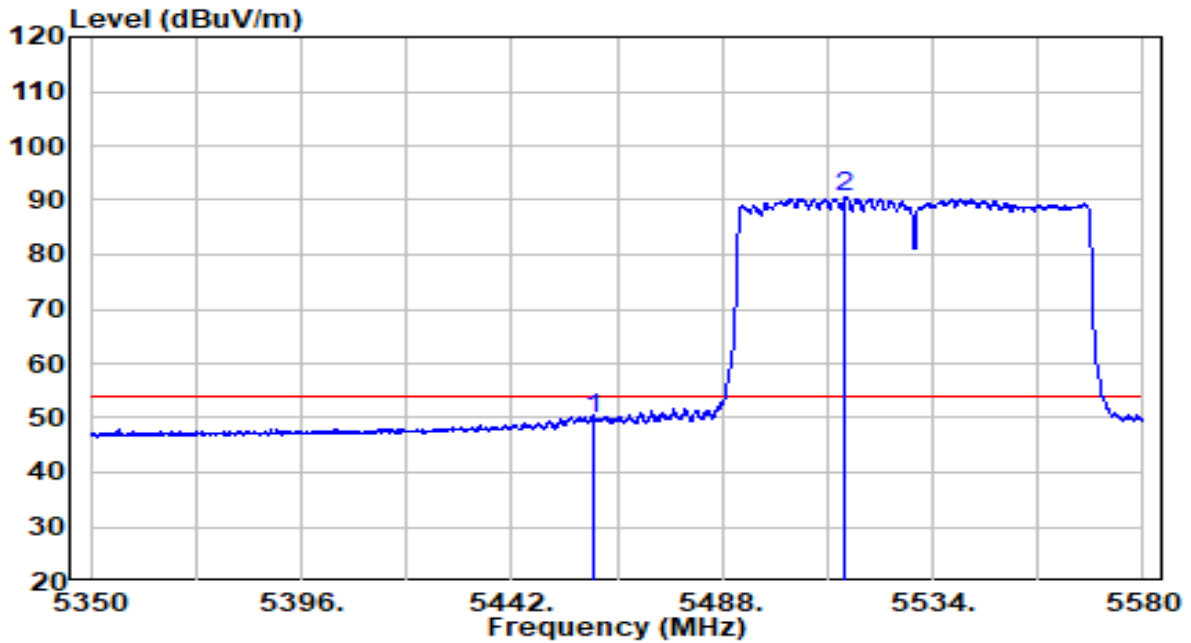


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	45.28	4.70	49.99	-4.01	54.00	Average
2	* 5514.680	85.59	4.82	90.42	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	120V/60Hz

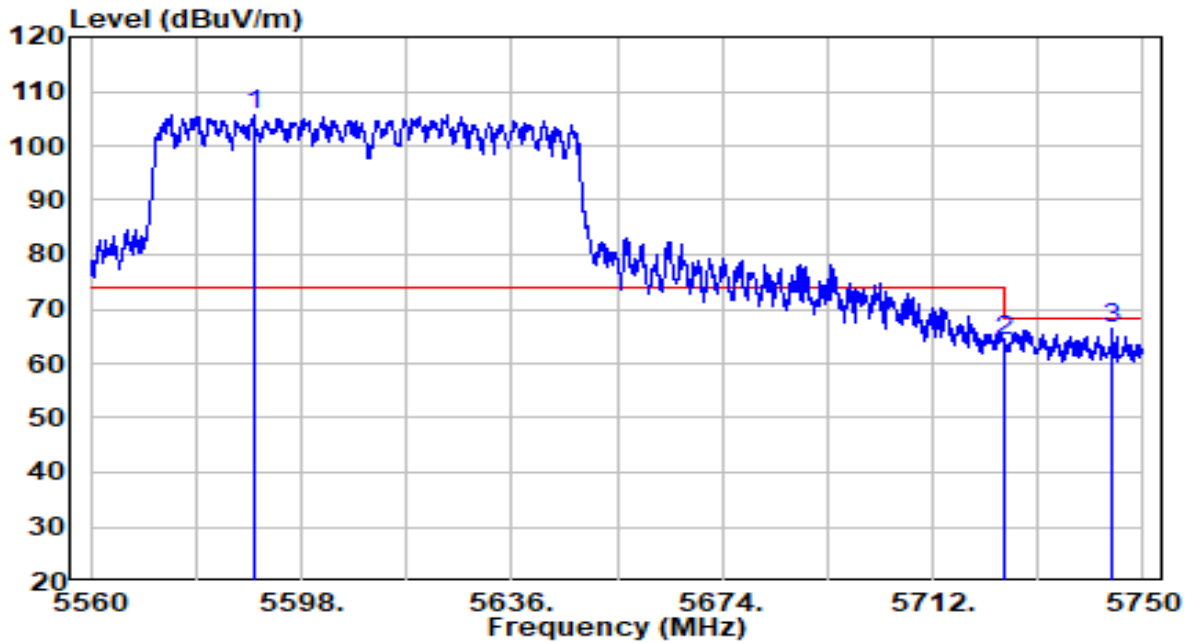


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5589.450	100.48	5.10	105.58	N/A	N/A	Peak
2	5725.000	58.53	5.59	64.12	-4.08	68.20	Peak
3	5744.395	60.57	5.66	66.23	-1.97	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	120V/60Hz

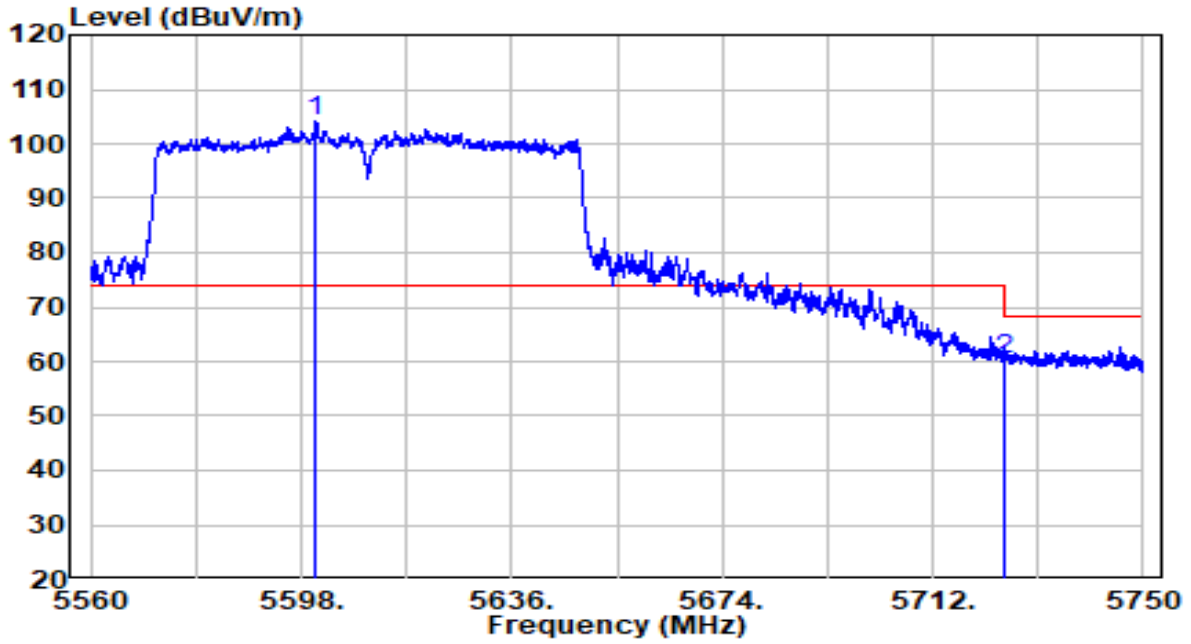


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5600.660	99.11	5.14	104.25	N/A	N/A	Peak
2	5725.000	54.60	5.59	60.19	-8.01	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	120V/60Hz

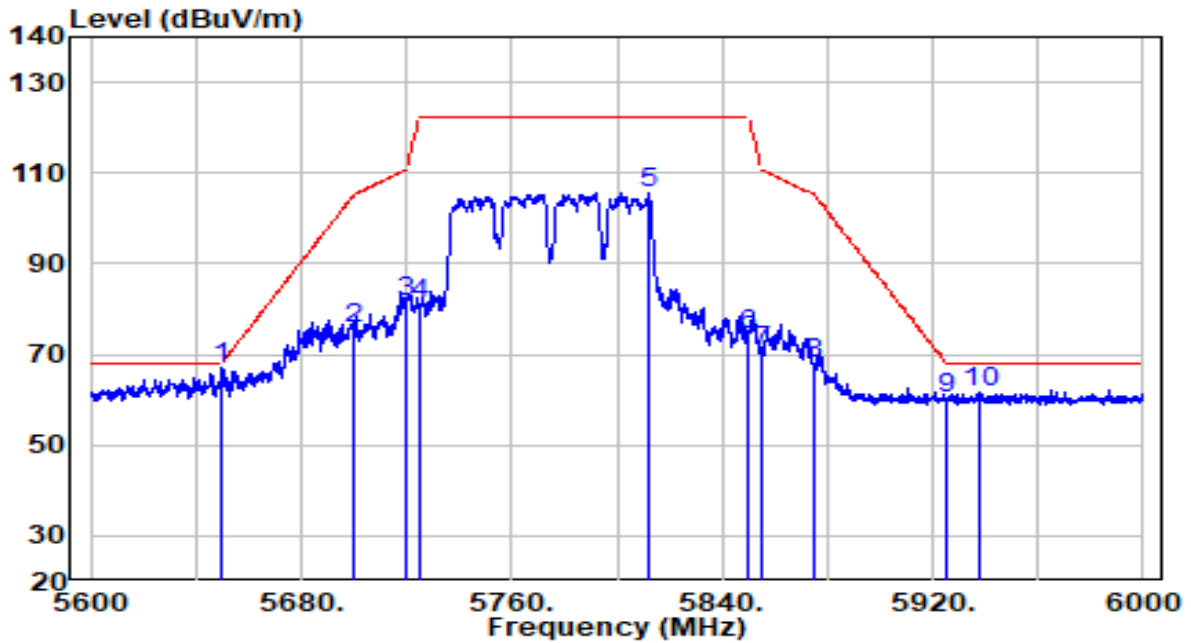


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5650.000	61.98	5.32	67.30	-0.90	68.20	Peak
2	5700.000	70.08	5.50	75.58	-29.62	105.20	Peak
3	5720.000	75.96	5.57	81.53	-29.27	110.80	Peak
4	5725.000	75.62	5.59	81.21	-40.99	122.20	Peak
5	5812.200	99.88	5.91	105.79	N/A	N/A	Peak
6	5850.000	68.27	6.04	74.31	-47.89	122.20	Peak
7	5855.000	64.64	6.06	70.70	-40.10	110.80	Peak
8	5875.000	61.82	6.13	67.96	-37.24	105.20	Peak
9	5925.000	54.16	6.32	60.48	-7.72	68.20	Peak
10	5938.000	55.21	6.36	61.58	-6.62	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	120V/60Hz

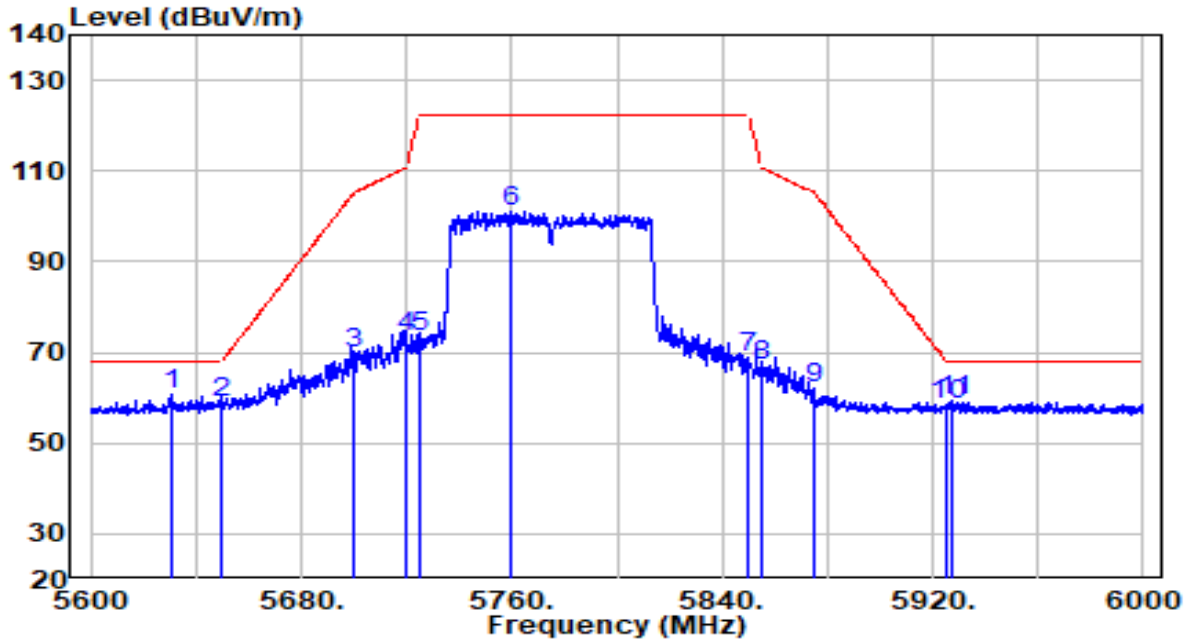

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5631.200	55.35	5.25	60.60	-7.60	68.20	Peak
2	5650.000	53.69	5.32	59.00	-9.20	68.20	Peak
3	5700.000	64.24	5.50	69.74	-35.46	105.20	Peak
4	5720.000	67.87	5.57	73.44	-37.36	110.80	Peak
5	5725.000	67.62	5.59	73.21	-48.99	122.20	Peak
6	5760.000	95.46	5.72	101.18	N/A	N/A	Peak
7	5850.000	63.08	6.04	69.12	-53.08	122.20	Peak
8	5855.000	60.93	6.06	66.99	-43.81	110.80	Peak
9	5875.000	56.01	6.13	62.15	-43.05	105.20	Peak
10	5925.000	52.06	6.32	58.38	-9.82	68.20	Peak
11	5927.600	53.22	6.33	59.54	-8.66	68.20	Peak


Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).

3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5250MHz	Test Voltage	120V/60Hz

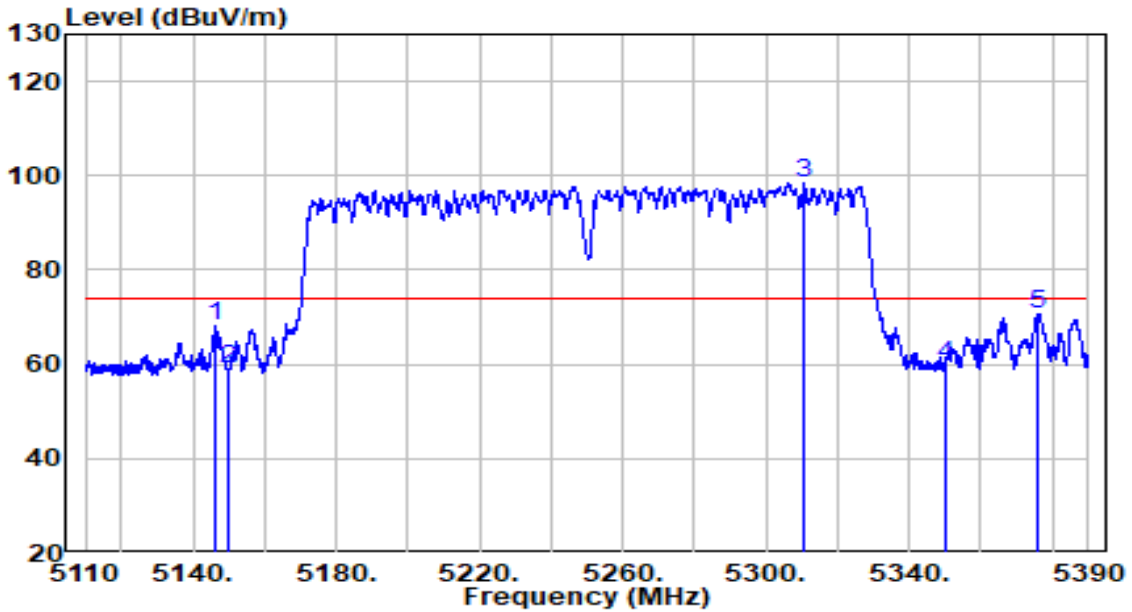


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5146.120	63.99	4.19	68.18	-5.82	74.00	Peak
2	5150.040	54.82	4.20	59.02	-14.98	74.00	Peak
3	* 5310.620	93.85	4.46	98.31	N/A	N/A	Peak
4	5350.000	55.12	4.52	59.65	-14.35	74.00	Peak
5	5376.000	66.10	4.57	70.67	-3.33	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5250MHz	Test Voltage	120V/60Hz

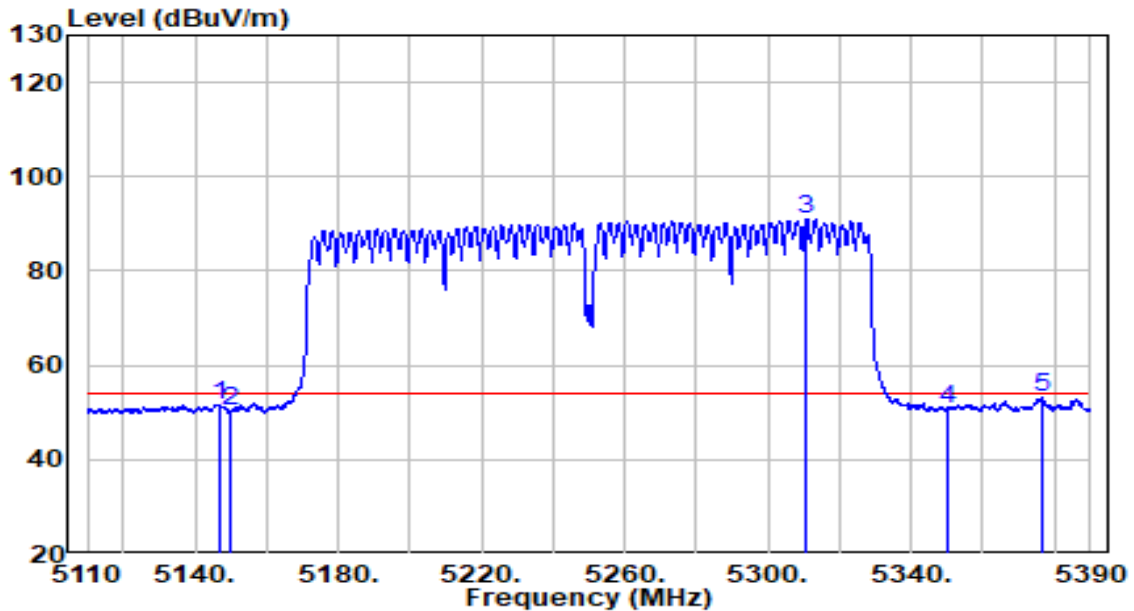


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5146.820	47.46	4.19	51.65	-2.35	54.00	Average
2	5150.000	46.20	4.20	50.40	-3.60	54.00	Average
3	* 5310.620	86.59	4.46	91.05	N/A	N/A	Average
4	5349.960	46.24	4.52	50.76	-3.24	54.00	Average
5	5376.420	48.70	4.57	53.26	-0.74	54.00	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5250MHz	Test Voltage	120V/60Hz

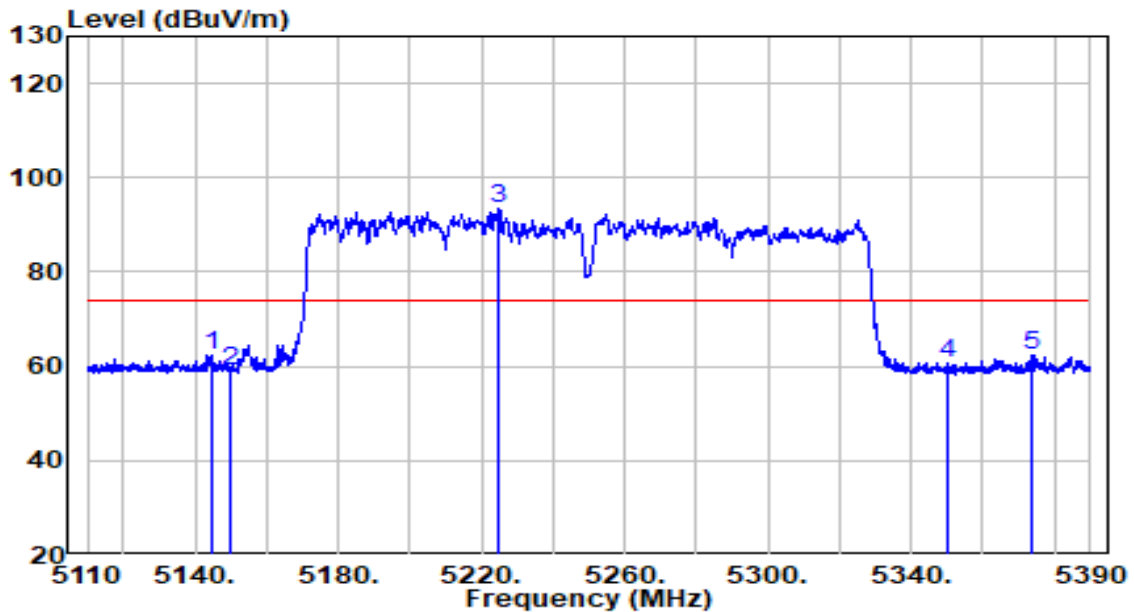


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5144.720	58.24	4.19	62.42	-11.58	74.00	Peak
2	5150.040	54.93	4.20	59.12	-14.88	74.00	Peak
3	* 5224.940	89.04	4.32	93.35	N/A	N/A	Peak
4	5350.000	56.15	4.52	60.68	-13.32	74.00	Peak
5	5373.480	57.66	4.56	62.23	-11.77	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5250MHz	Test Voltage	120V/60Hz

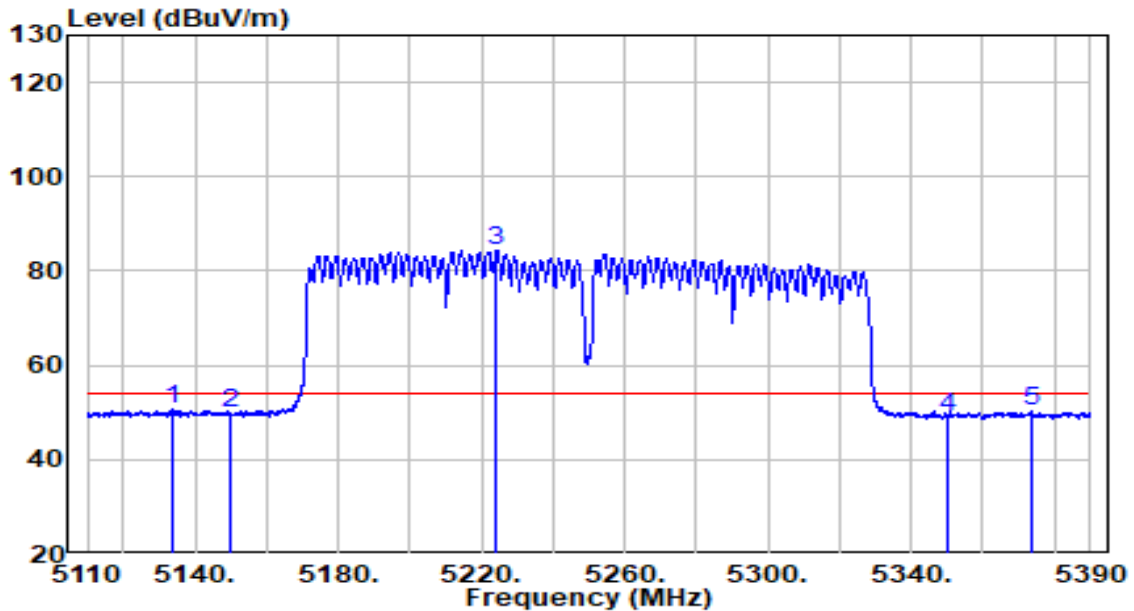


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5134.080	46.34	4.17	50.51	-3.49	54.00	Average
2	5150.000	45.48	4.20	49.68	-4.32	54.00	Average
3	* 5224.100	80.01	4.32	84.33	N/A	N/A	Average
4	5350.000	44.43	4.52	48.95	-5.05	54.00	Average
5	5373.620	45.80	4.56	50.36	-3.64	54.00	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5570MHz	Test Voltage	120V/60Hz

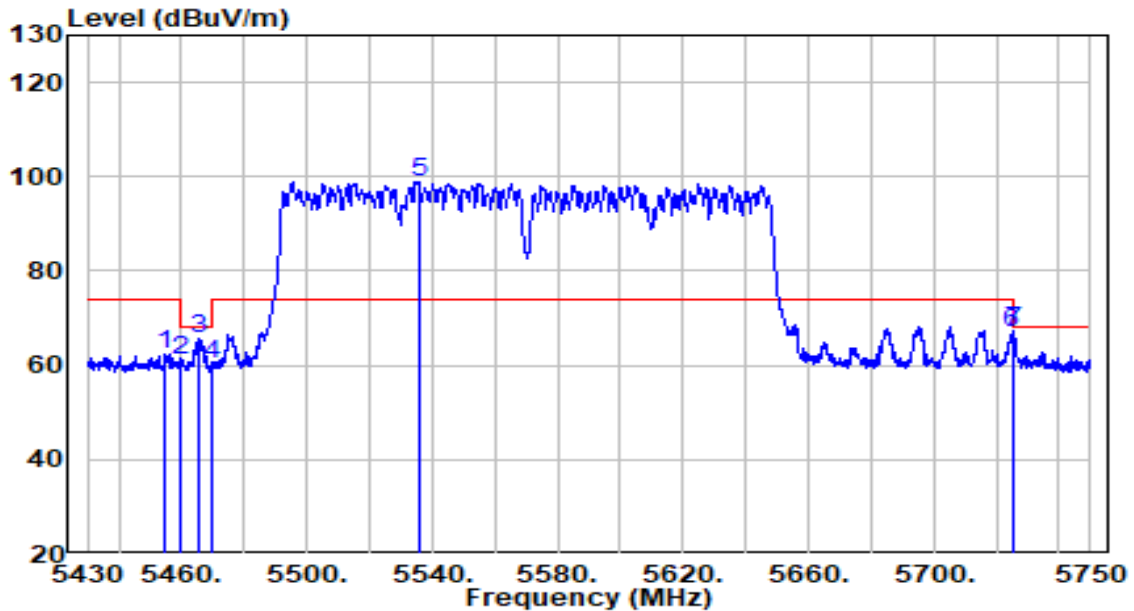


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5454.480	57.69	4.70	62.39	-11.61	74.00	Peak
2	5460.000	56.50	4.70	61.20	-7.00	68.20	Peak
3	5465.520	60.79	4.71	65.51	-2.69	68.20	Peak
4	5470.000	55.72	4.72	60.44	-7.76	68.20	Peak
5	* 5535.600	94.07	4.90	98.97	N/A	N/A	Peak
6	5725.000	61.51	5.59	67.10	-1.10	68.20	Peak
7	5725.360	61.70	5.59	67.29	-0.91	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5570MHz	Test Voltage	120V/60Hz

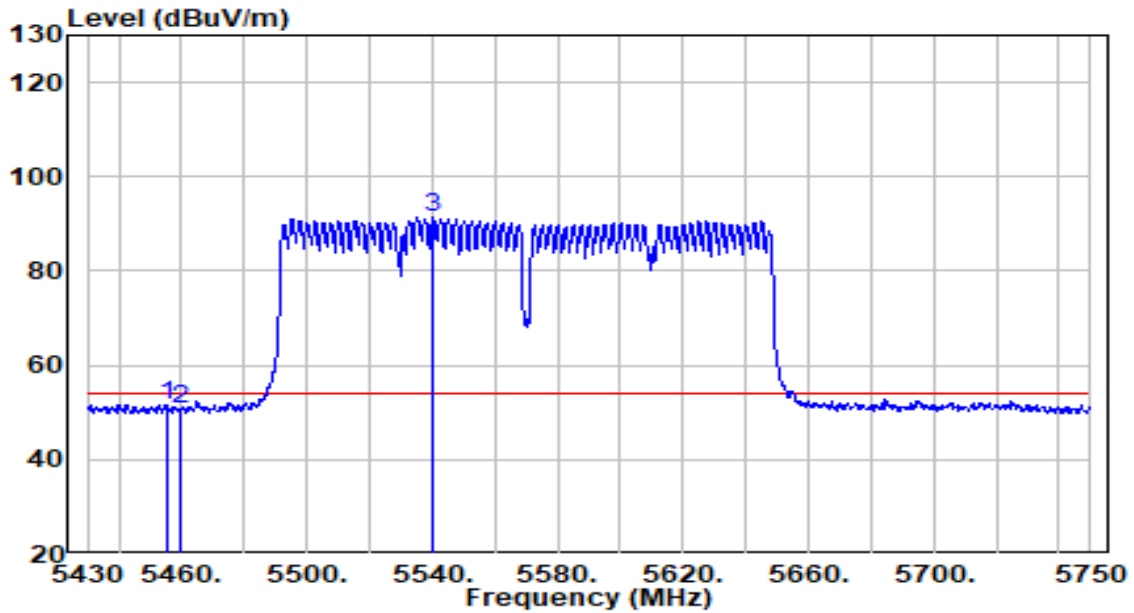


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5455.440	46.98	4.70	51.68	-2.32	54.00	Average
2	5460.000	46.01	4.70	50.72	-3.28	54.00	Average
3	* 5540.240	86.45	4.92	91.37	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5570MHz	Test Voltage	120V/60Hz

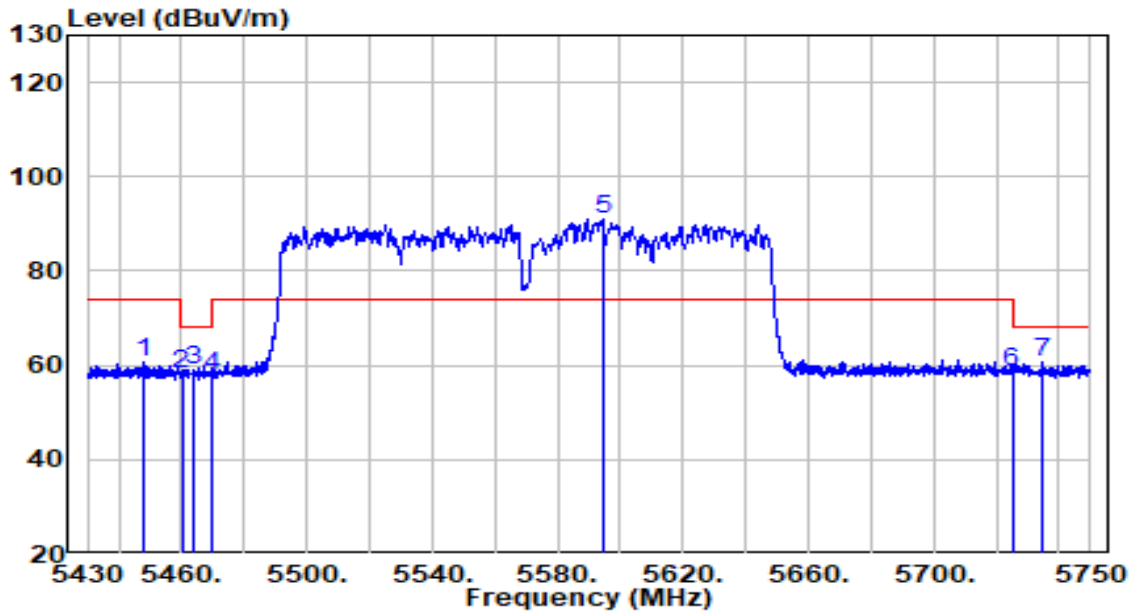


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5448.240	56.09	4.69	60.77	-13.23	74.00	Peak
2	5460.080	53.28	4.70	57.99	-10.21	68.20	Peak
3	5463.760	54.37	4.71	59.08	-9.12	68.20	Peak
4	5470.000	52.91	4.72	57.64	-10.56	68.20	Peak
5	* 5594.320	85.78	5.11	90.89	N/A	N/A	Peak
6	5725.000	53.09	5.59	58.68	-9.52	68.20	Peak
7	5734.640	54.85	5.62	60.48	-7.72	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ac-VHT160 at Channel 5570MHz	Test Voltage	120V/60Hz

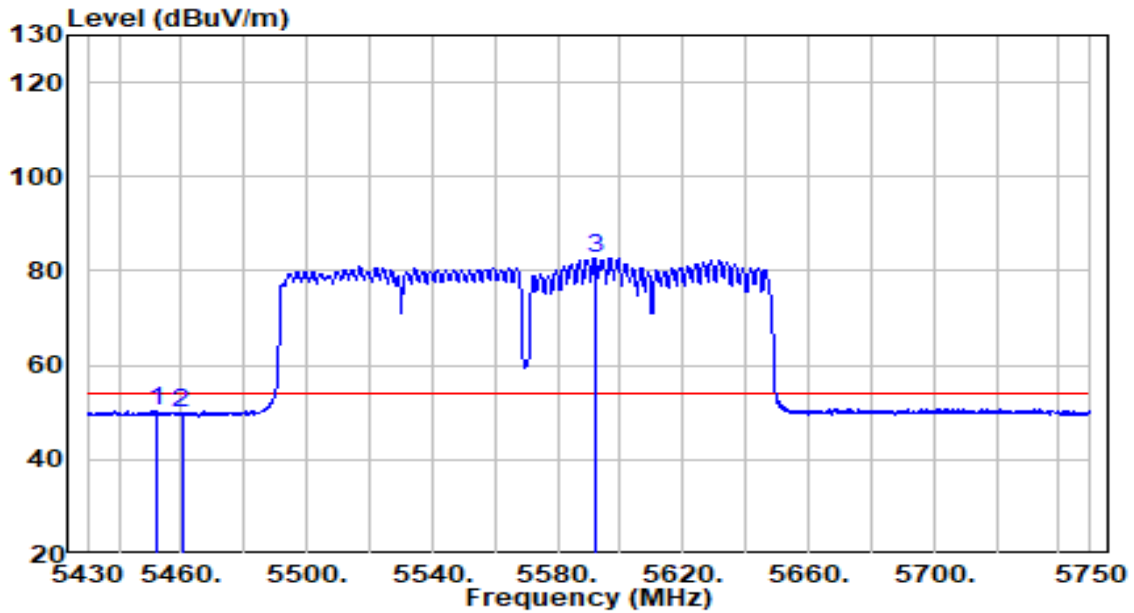


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5452.080	45.56	4.69	50.25	-3.75	54.00	Average
2	5460.080	45.00	4.70	49.71	-4.29	54.00	Average
3	* 5591.920	77.77	5.10	82.87	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	120V/60Hz

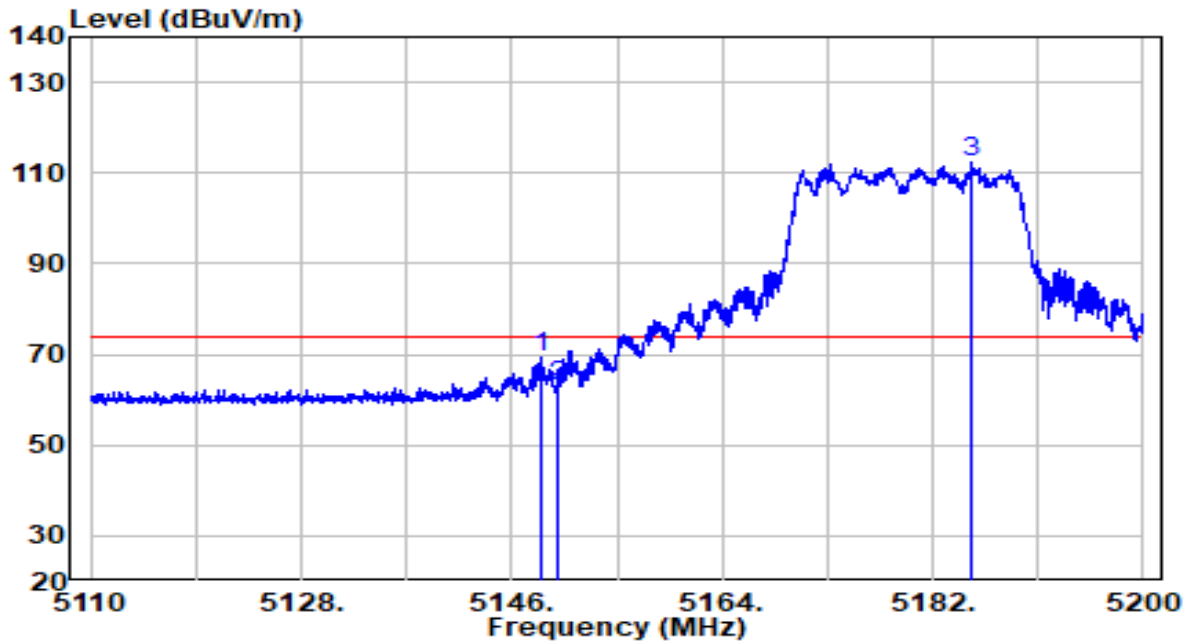


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.475	65.16	4.19	69.35	-4.65	74.00	Peak
2	5150.000	58.83	4.20	63.02	-10.98	74.00	Peak
3	* 5185.375	107.97	4.25	112.23	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	120V/60Hz

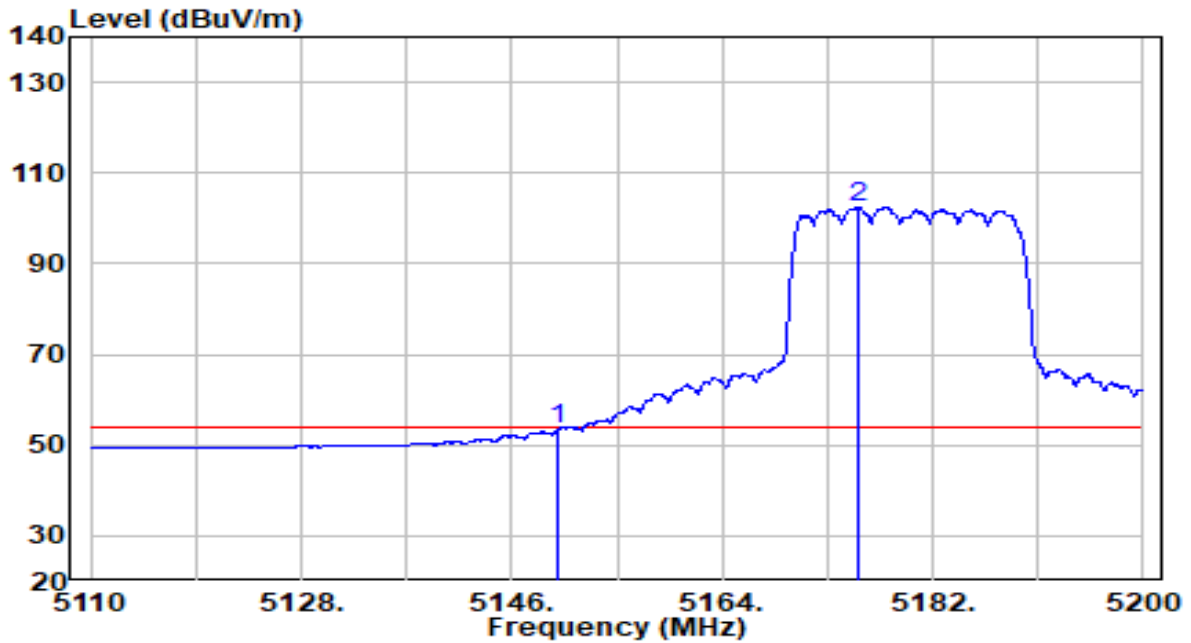


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	49.19	4.20	53.39	-0.61	54.00	Average
2	* 5175.565	98.33	4.24	102.57	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	120V/60Hz

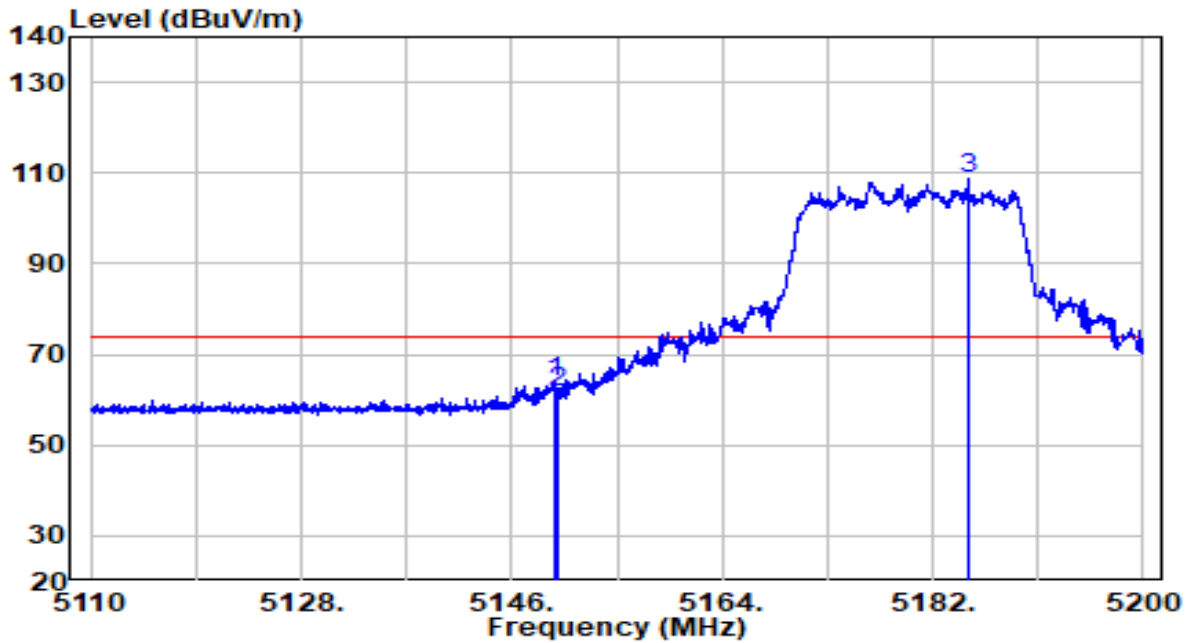


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.690	59.51	4.20	63.70	-10.30	74.00	Peak
2	5150.005	57.41	4.20	61.61	-12.39	74.00	Peak
3	* 5184.970	104.32	4.25	108.58	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	120V/60Hz

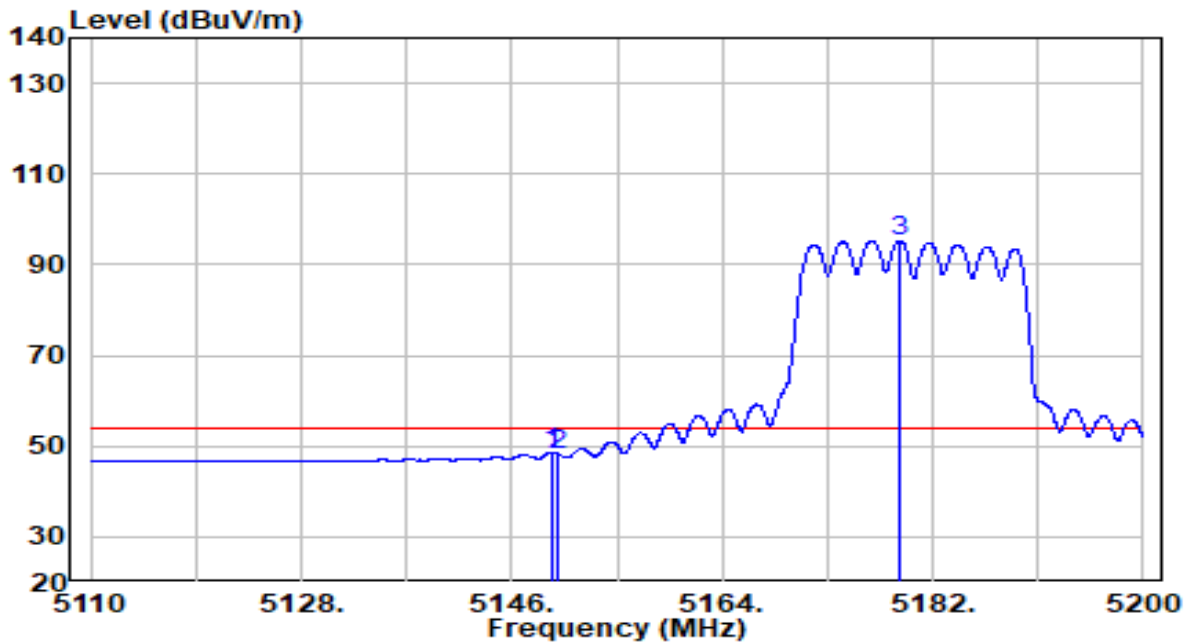


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.510	44.41	4.20	48.60	-5.40	54.00	Average
2	5150.000	44.03	4.20	48.23	-5.77	54.00	Average
3	* 5179.165	91.08	4.24	95.32	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	120V/60Hz

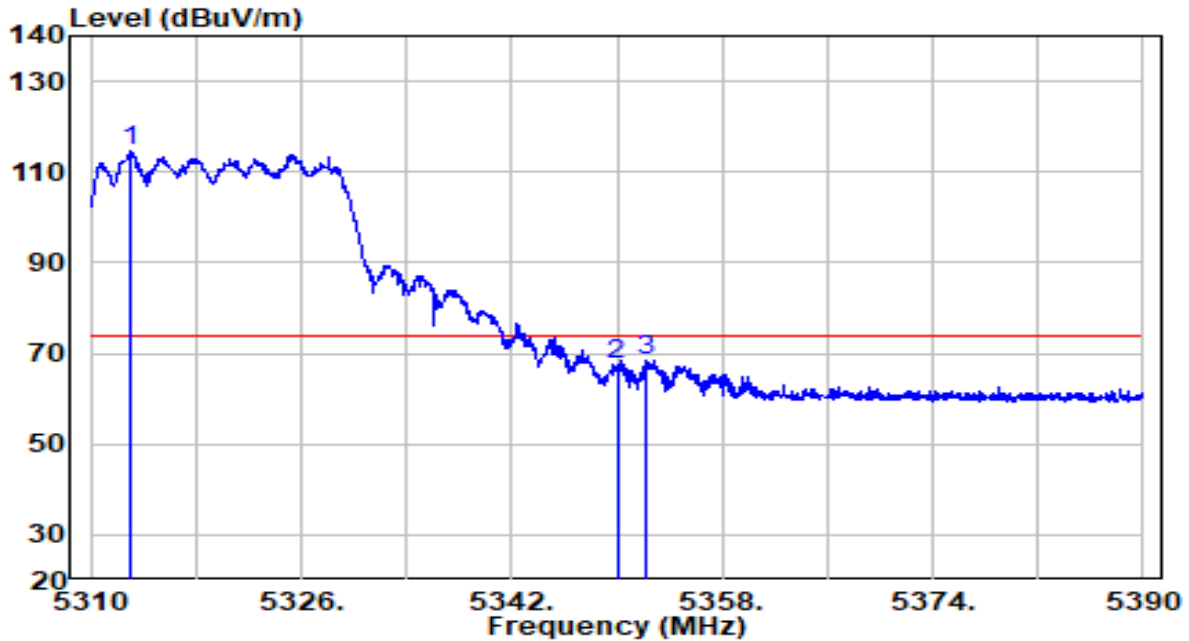


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5313.080	110.01	4.46	114.48	N/A	N/A	Peak
2	5350.000	63.04	4.52	67.56	-6.44	74.00	Peak
3	5352.240	64.05	4.53	68.58	-5.42	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	120V/60Hz

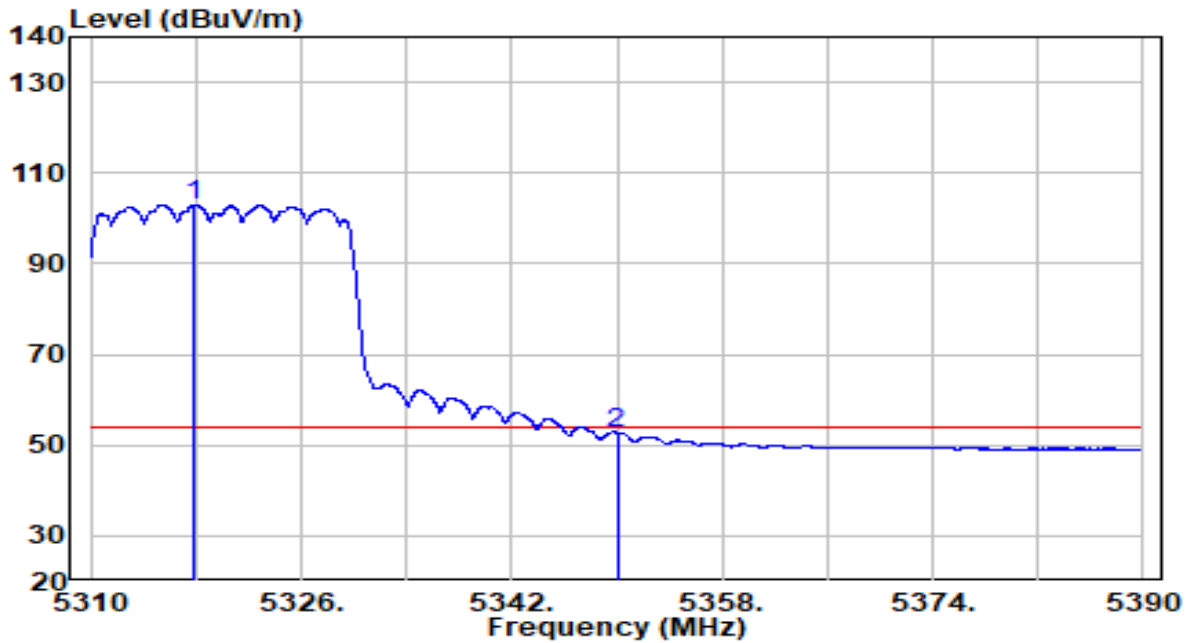


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5317.800	98.56	4.47	103.03	N/A	N/A	Average
2	5350.000	48.11	4.52	52.63	-1.37	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	120V/60Hz

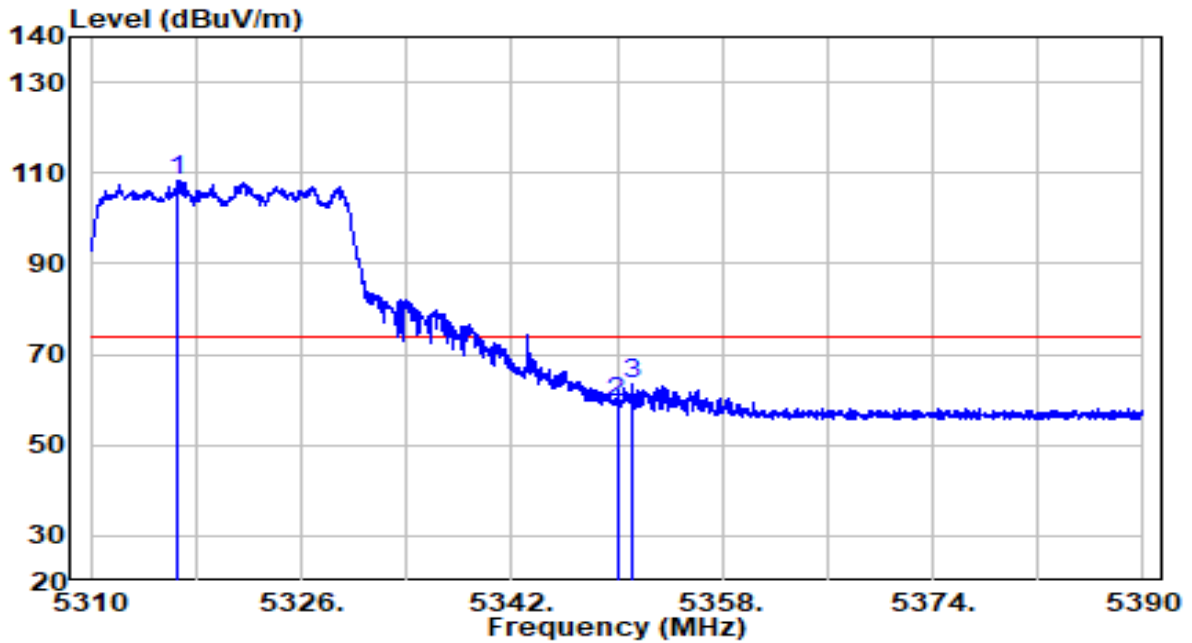


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5316.640	103.94	4.47	108.41	N/A	N/A	Peak
2	5350.000	54.76	4.52	59.28	-14.72	74.00	Peak
3	5351.160	58.72	4.53	63.25	-10.75	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	120V/60Hz

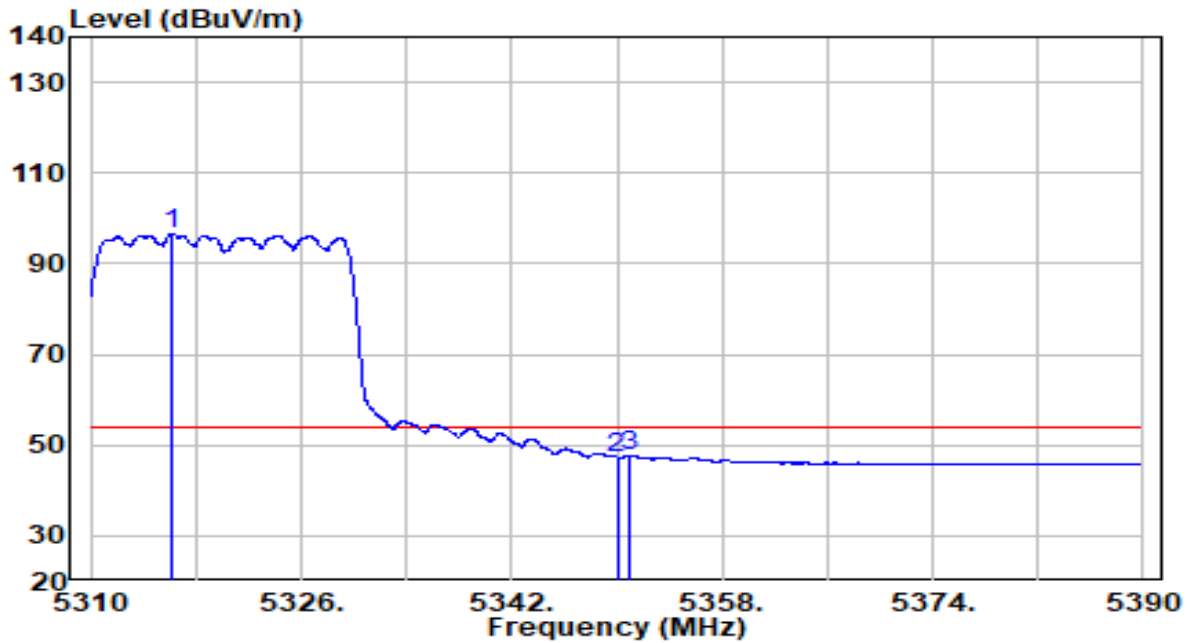


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5316.200	92.18	4.47	96.65	N/A	N/A	Average
2	5350.000	42.84	4.52	47.36	-6.64	54.00	Average
3	5350.920	43.32	4.53	47.84	-6.16	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	120V/60Hz

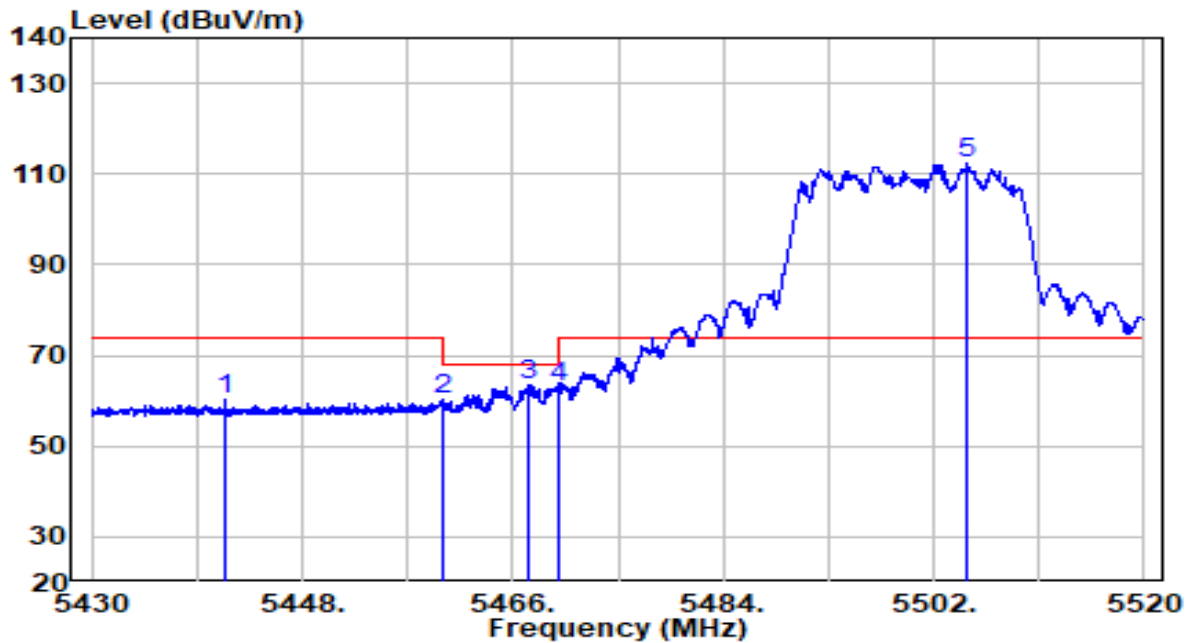


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5441.430	55.56	4.67	60.23	-13.77	74.00	Peak
2	5460.000	55.47	4.70	60.17	-8.03	68.20	Peak
3	5467.305	58.87	4.72	63.58	-4.62	68.20	Peak
4	5470.000	58.29	4.72	63.01	-5.19	68.20	Peak
5	* 5504.925	107.66	4.79	112.45	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	120V/60Hz

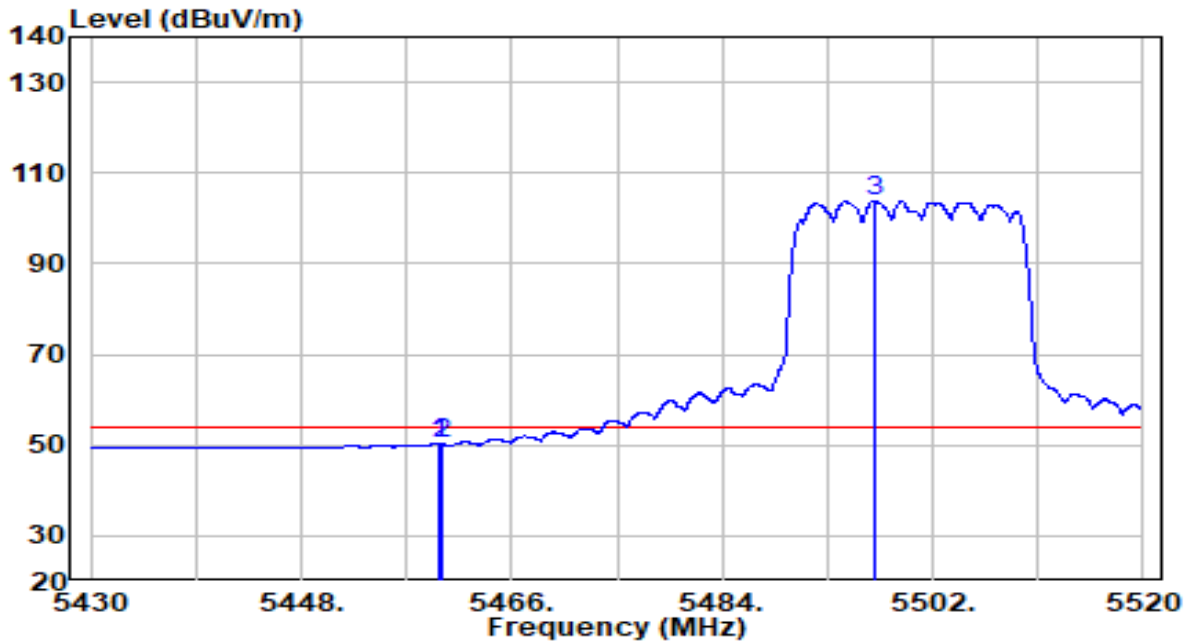


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.790	45.56	4.70	50.27	-3.73	54.00	Average
2	5460.000	45.47	4.70	50.17	-3.83	54.00	Average
3	* 5496.960	99.11	4.77	103.88	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	120V/60Hz

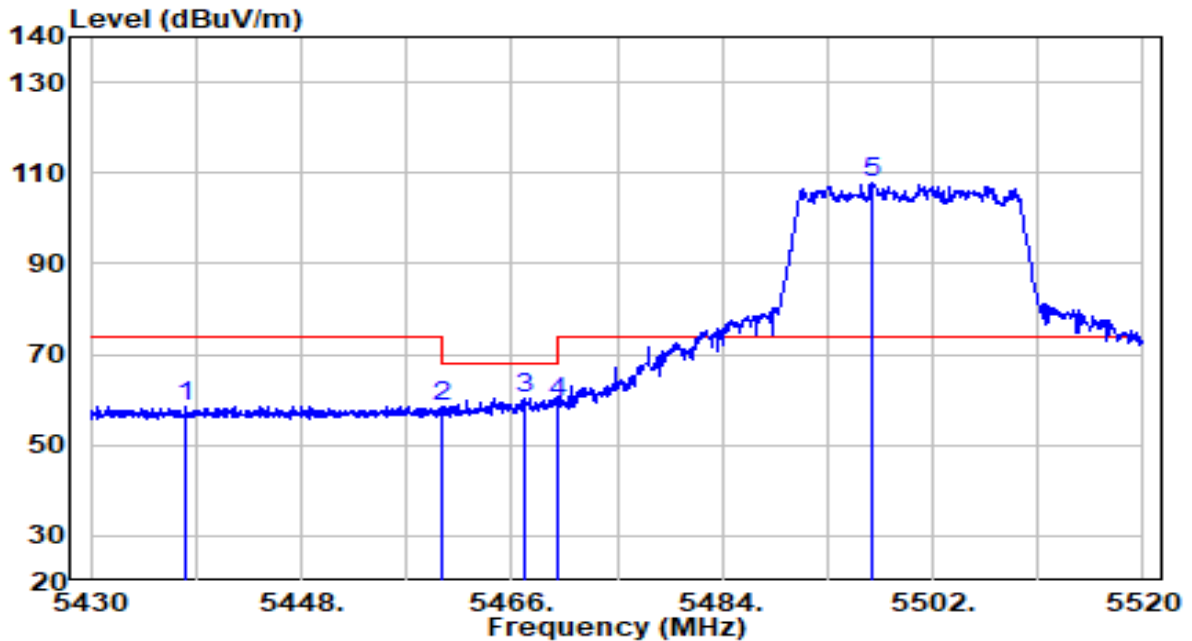


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5438.190	54.00	4.67	58.66	-15.34	74.00	Peak
2	5460.000	53.97	4.70	58.67	-9.53	68.20	Peak
3	5467.125	55.61	4.72	60.33	-7.87	68.20	Peak
4	5470.000	54.68	4.72	59.40	-8.80	68.20	Peak
5	* 5496.915	103.24	4.76	108.00	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	120V/60Hz

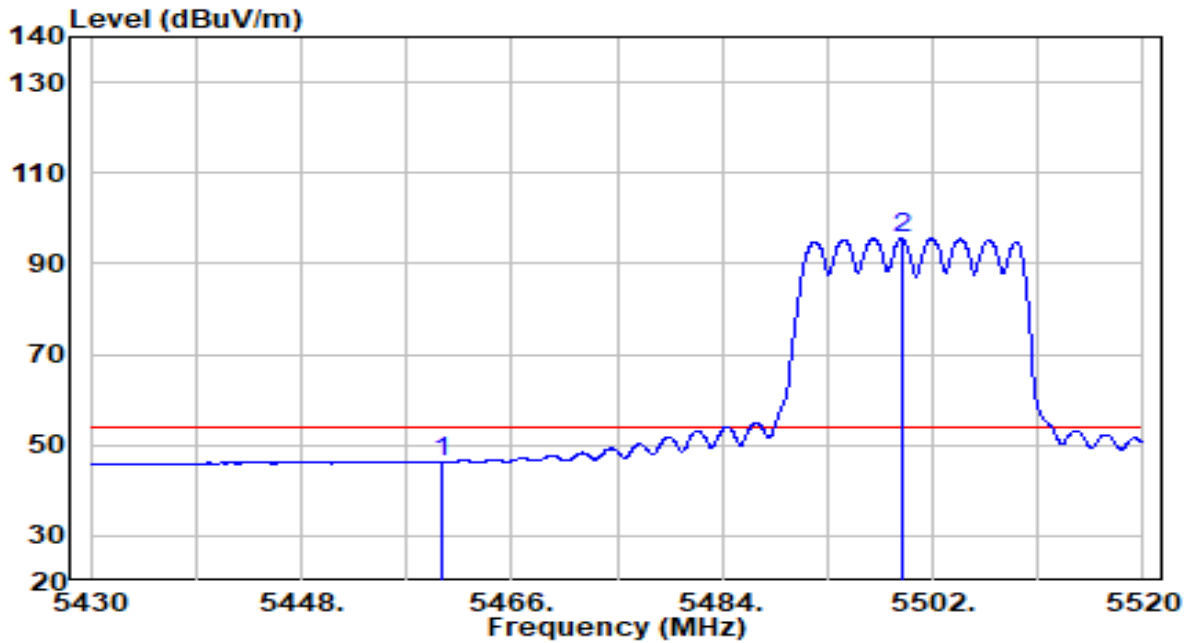


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	41.60	4.70	46.30	-7.70	54.00	Average
2	* 5499.345	90.72	4.77	95.49	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	120V/60Hz

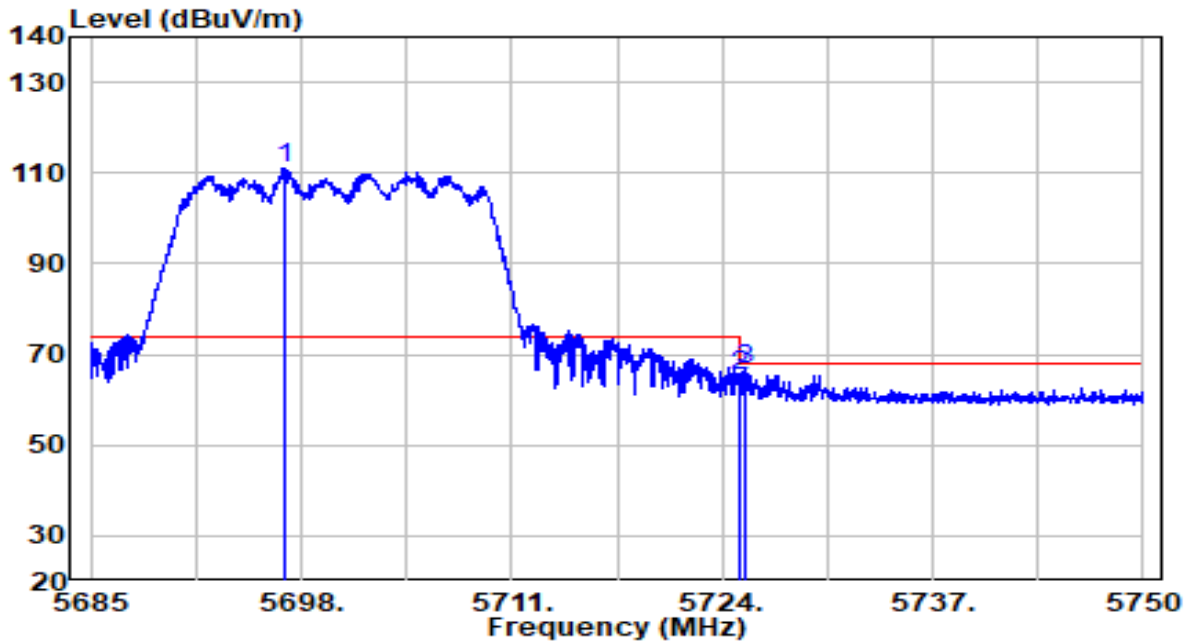


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5697.025	105.34	5.49	110.83	N/A	N/A	Peak
2	5725.000	59.56	5.59	65.15	-3.05	68.20	Peak
3	5725.495	61.12	5.59	66.71	-1.49	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	120V/60Hz

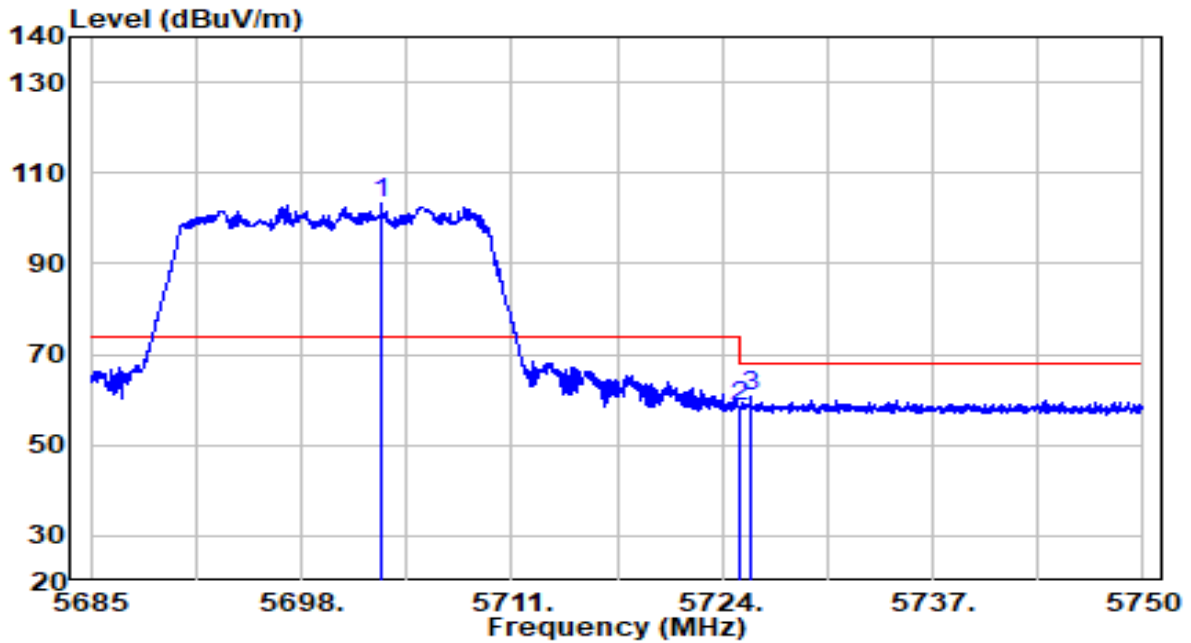


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5702.973	97.78	5.51	103.29	N/A	N/A	Peak
2	5725.000	52.97	5.59	58.56	-9.64	68.20	Peak
3	5725.788	55.20	5.59	60.79	-7.41	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	120V/60Hz

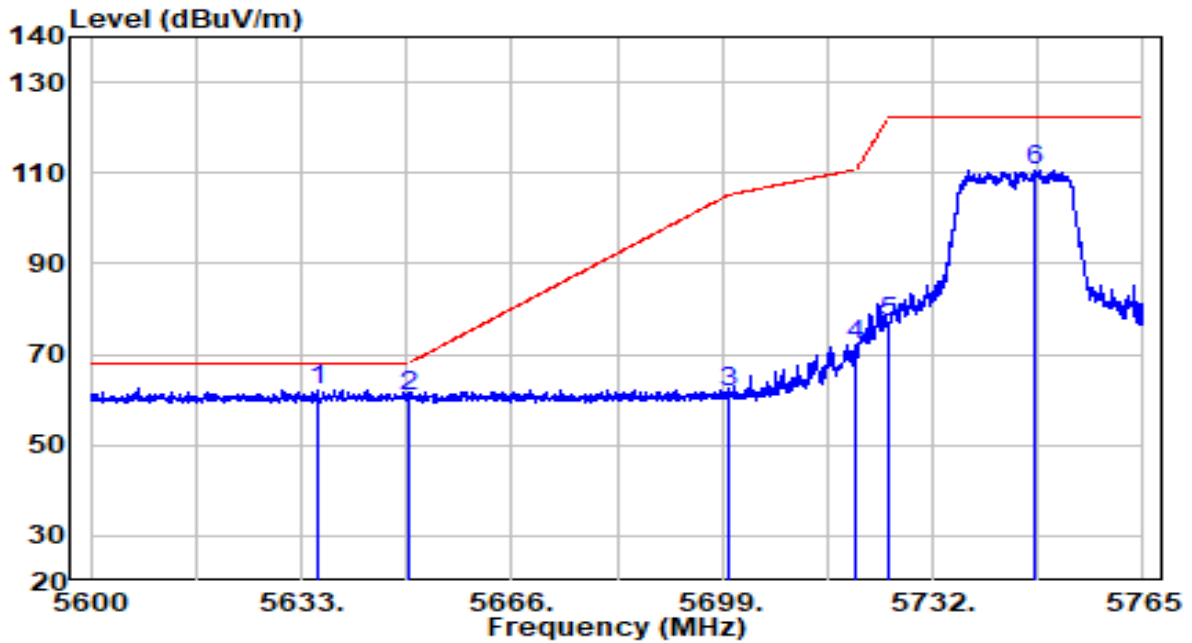


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5635.475	57.04	5.26	62.31	-5.89	68.20	Peak
2	5650.000	55.22	5.32	60.54	-7.66	68.20	Peak
3	5700.000	56.06	5.50	61.56	-43.64	105.20	Peak
4	5720.000	66.71	5.57	72.28	-38.52	110.80	Peak
5	5725.000	71.49	5.59	77.08	-45.12	122.20	Peak
6	5748.005	104.85	5.67	110.53	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	120V/60Hz

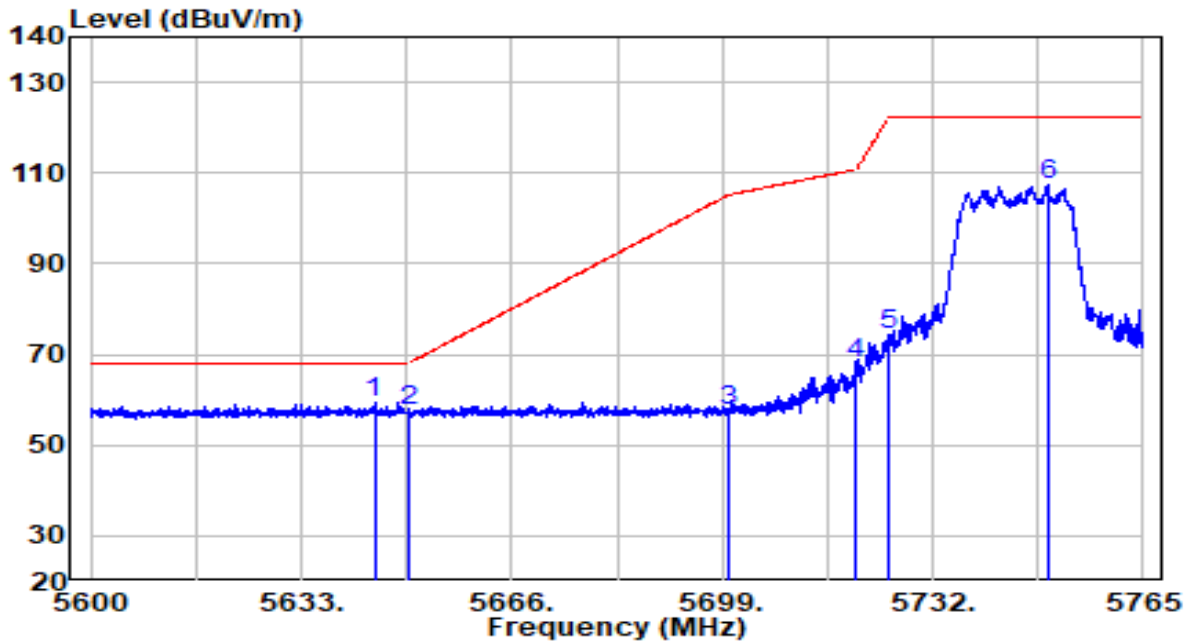


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5644.467	54.03	5.30	59.32	-8.88	68.20	Peak
2	5650.000	52.11	5.32	57.42	-10.78	68.20	Peak
3	5700.000	52.00	5.50	57.50	-47.70	105.20	Peak
4	5720.000	62.42	5.57	67.99	-42.81	110.80	Peak
5	5725.000	68.53	5.59	74.12	-48.08	122.20	Peak
6	5749.985	101.53	5.68	107.21	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	120V/60Hz

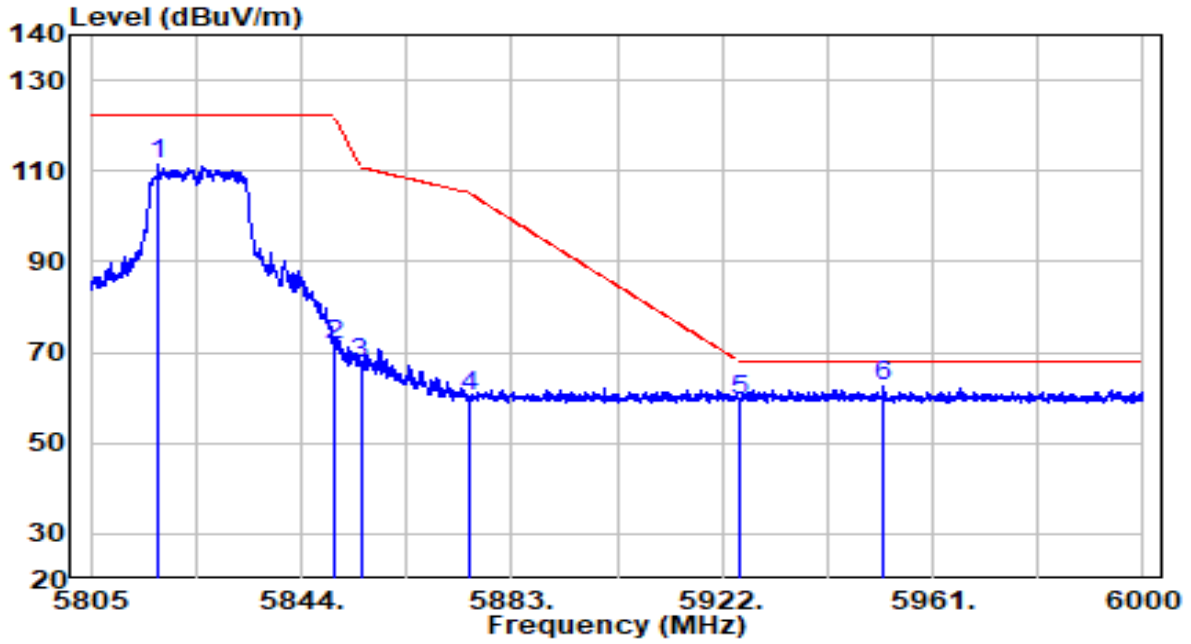


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5817.578	105.48	5.93	111.40	N/A	N/A	Peak
2	5850.000	65.58	6.04	71.63	-50.57	122.20	Peak
3	5855.000	61.36	6.06	67.43	-43.37	110.80	Peak
4	5875.000	54.04	6.13	60.17	-45.03	105.20	Peak
5	5925.000	53.29	6.32	59.61	-8.59	68.20	Peak
6	* 5952.030	56.19	6.42	62.60	-5.60	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	120V/60Hz

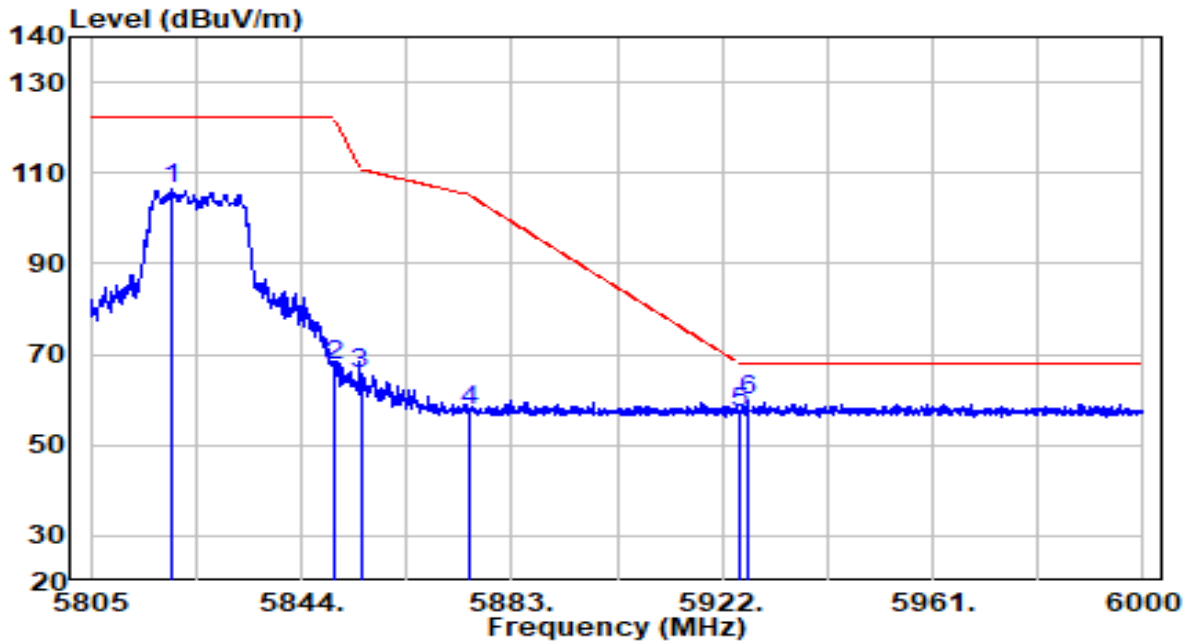


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5819.820	100.40	5.93	106.34	N/A	N/A	Peak
2	5850.000	61.35	6.04	67.40	-54.80	122.20	Peak
3	5855.000	59.72	6.06	65.78	-45.02	110.80	Peak
4	5875.000	51.60	6.13	57.73	-47.47	105.20	Peak
5	5925.000	50.88	6.32	57.20	-11.00	68.20	Peak
6	* 5926.680	53.64	6.32	59.97	-8.23	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	120V/60Hz

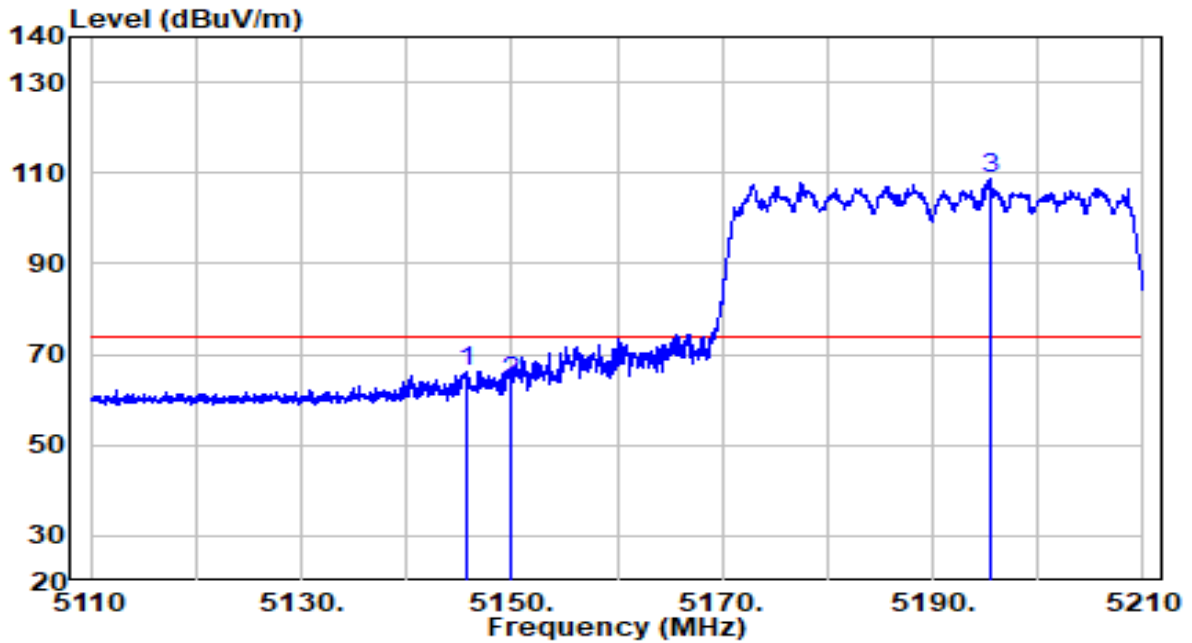


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5145.700	62.18	4.19	66.37	-7.63	74.00	Peak
2	5150.000	59.76	4.20	63.96	-10.04	74.00	Peak
3	* 5195.400	104.26	4.27	108.54	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	120V/60Hz

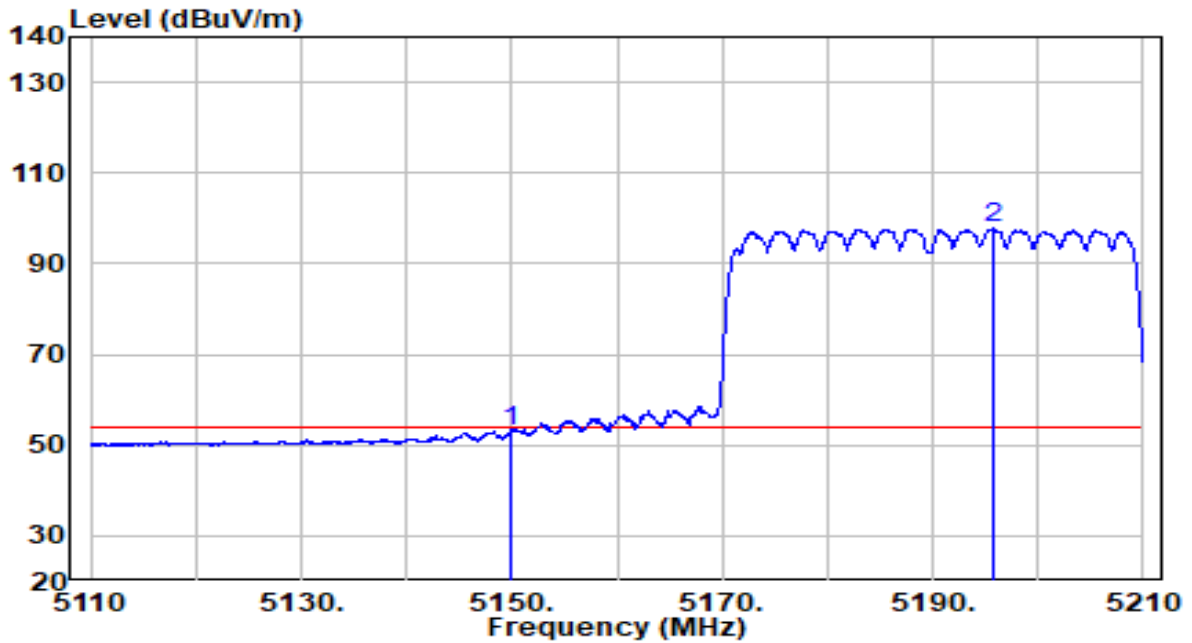


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	49.01	4.20	53.20	-0.80	54.00	Average
2	* 5195.850	93.40	4.27	97.67	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	120V/60Hz

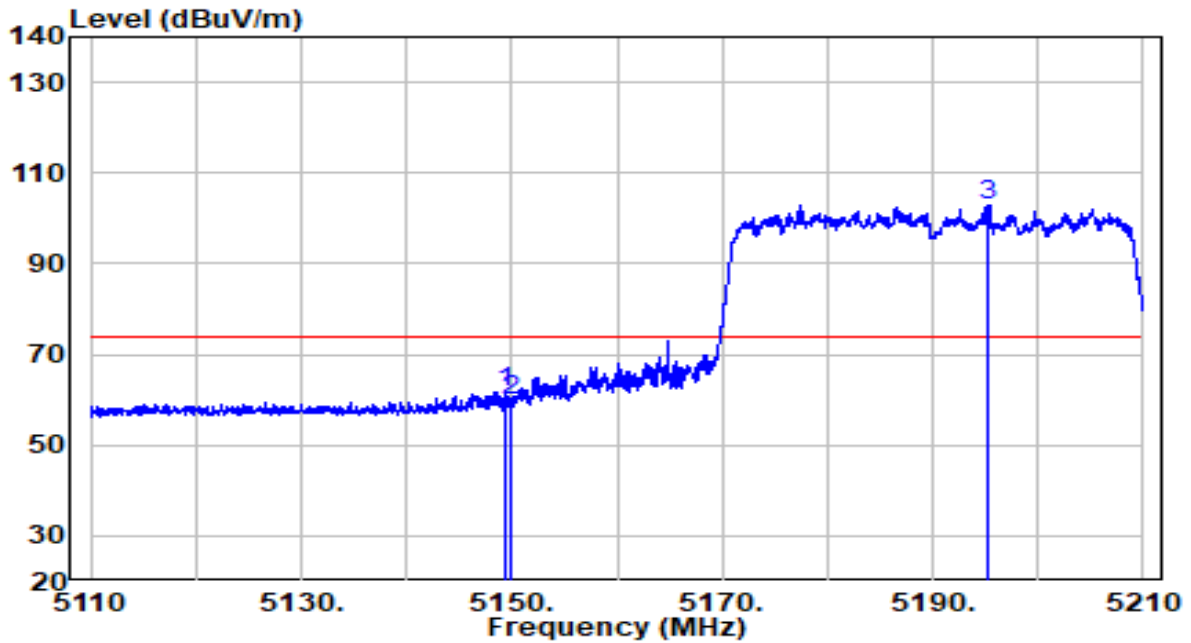


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.350	57.65	4.19	61.85	-12.15	74.00	Peak
2	5150.000	55.43	4.20	59.62	-14.38	74.00	Peak
3	* 5195.300	98.63	4.27	102.90	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	120V/60Hz

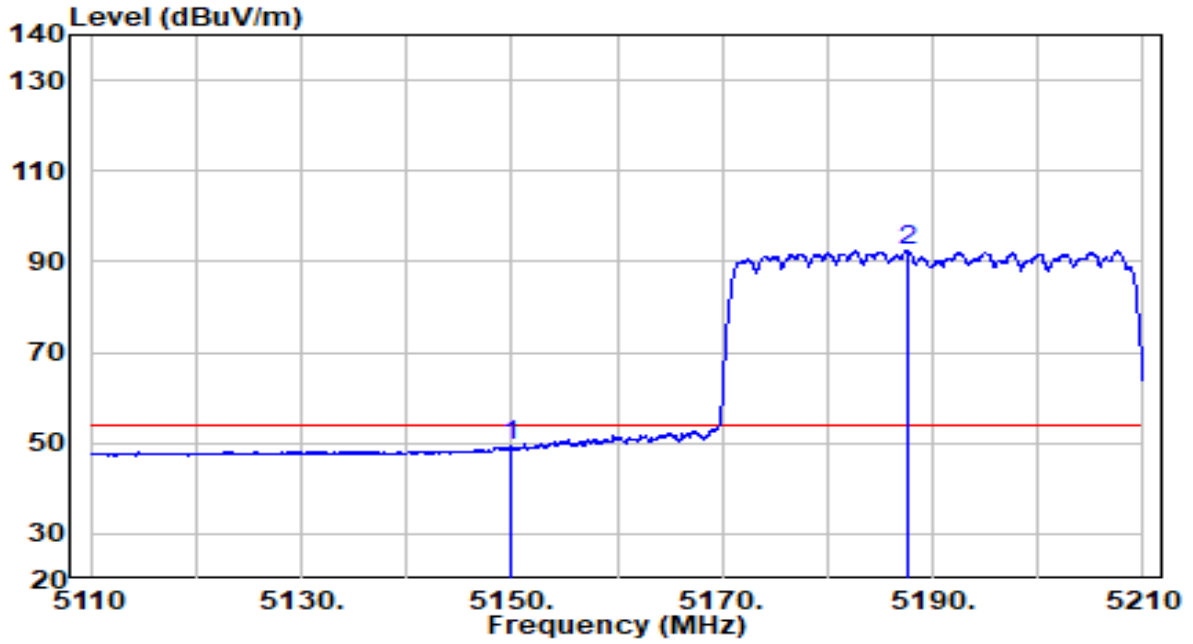


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	45.04	4.20	49.24	-4.76	54.00	Average
2	* 5187.550	88.22	4.26	92.47	N/A	N/A	Average

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	120V/60Hz

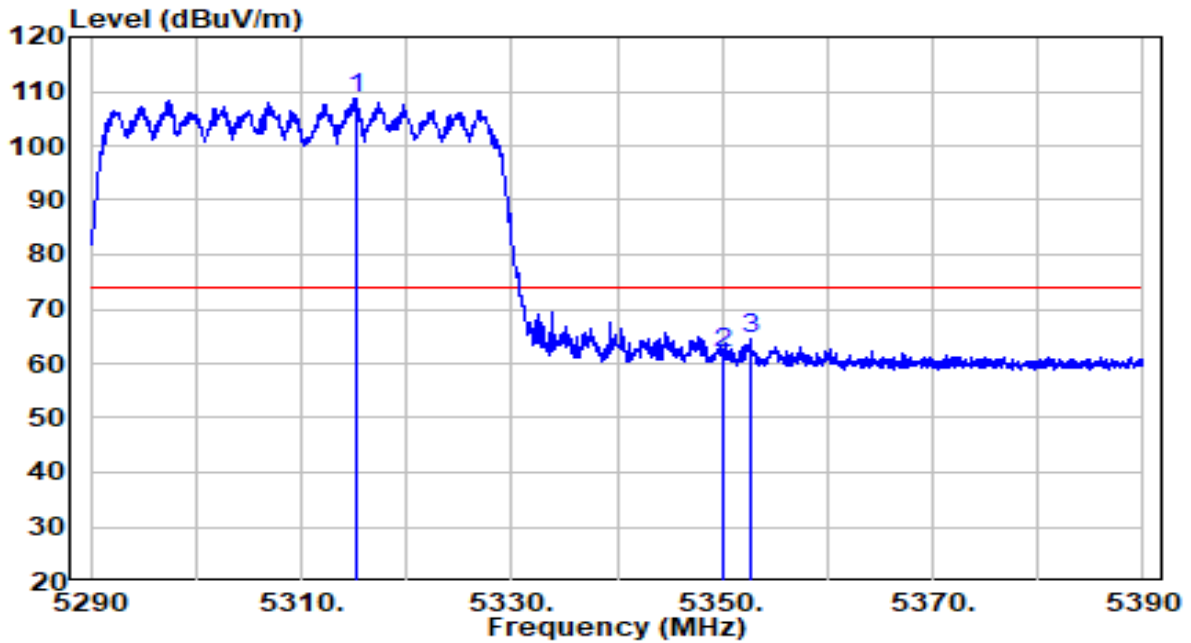


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5315.150	104.35	4.47	108.82	N/A	N/A	Peak
2	5350.000	57.47	4.52	61.99	-12.01	74.00	Peak
3	5352.650	59.85	4.53	64.38	-9.62	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	120V/60Hz

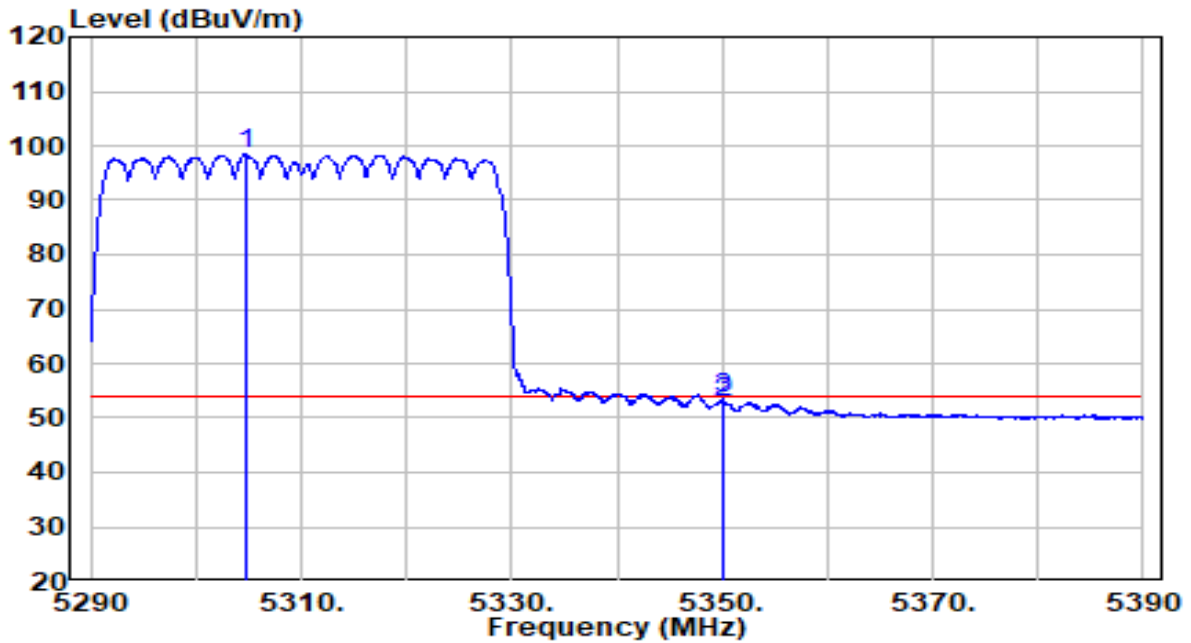


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5304.650	93.92	4.45	98.37	N/A	N/A	Average
2	5350.000	48.46	4.52	52.98	-1.02	54.00	Average
3	5350.150	48.97	4.52	53.49	-0.51	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	120V/60Hz

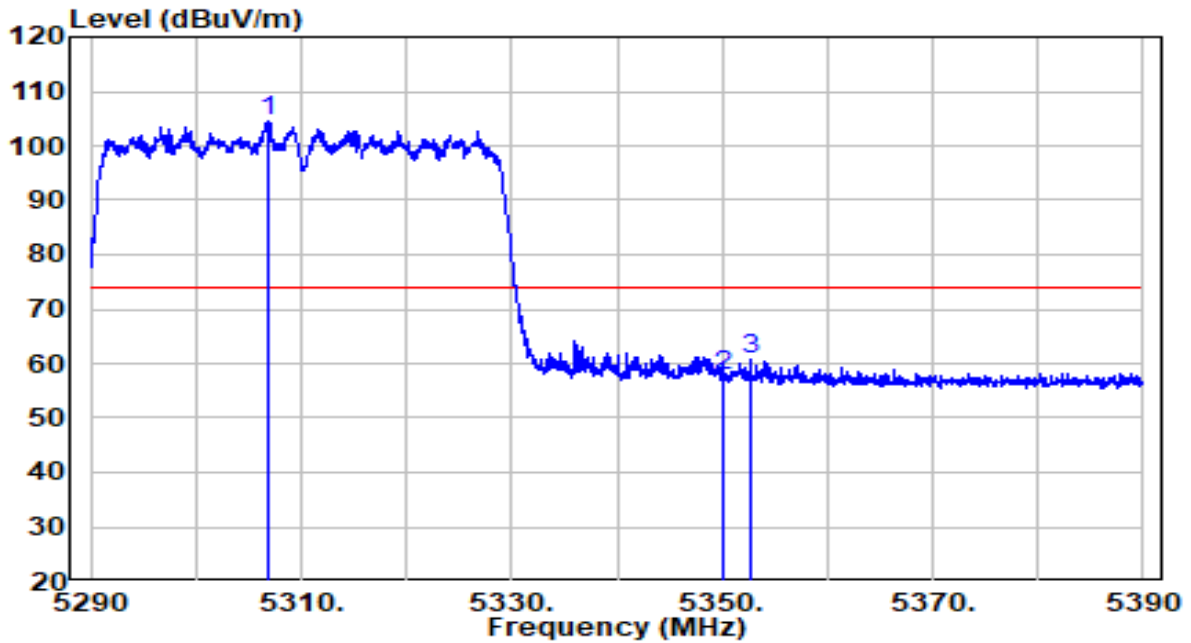


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5306.750	100.11	4.45	104.56	N/A	N/A	Peak
2	5350.000	53.33	4.52	57.85	-16.15	74.00	Peak
3	5352.700	56.38	4.53	60.91	-13.09	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	120V/60Hz

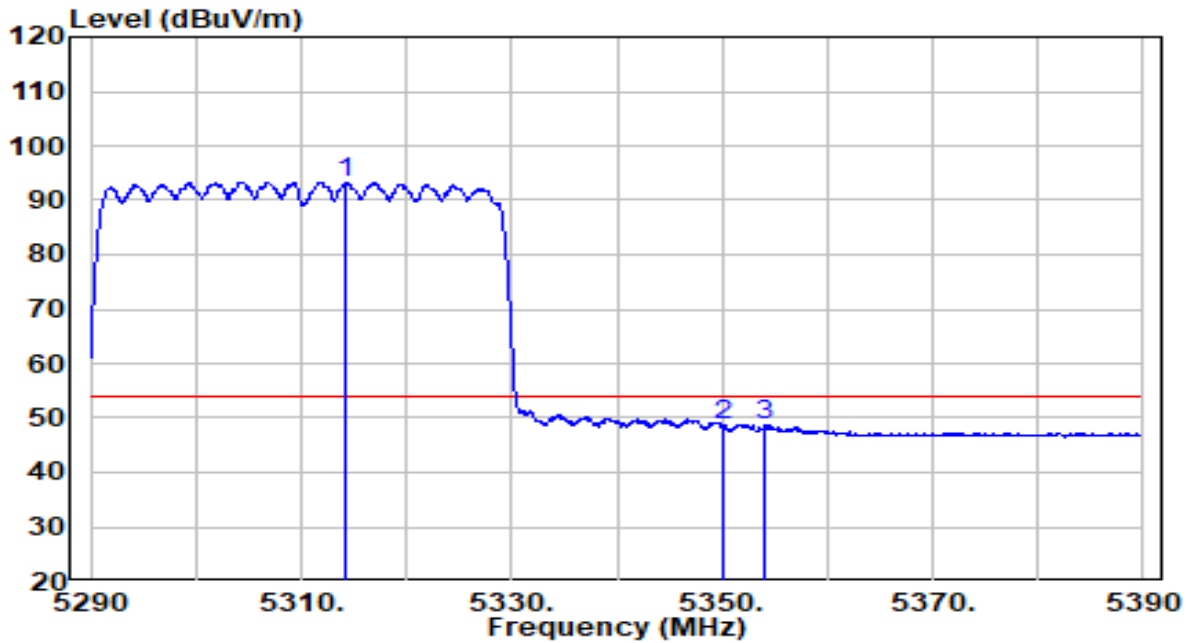


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5314.300	88.91	4.47	93.37	N/A	N/A	Average
2	5350.000	44.26	4.52	48.78	-5.22	54.00	Average
3	5354.100	44.30	4.53	48.83	-5.17	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	120V/60Hz

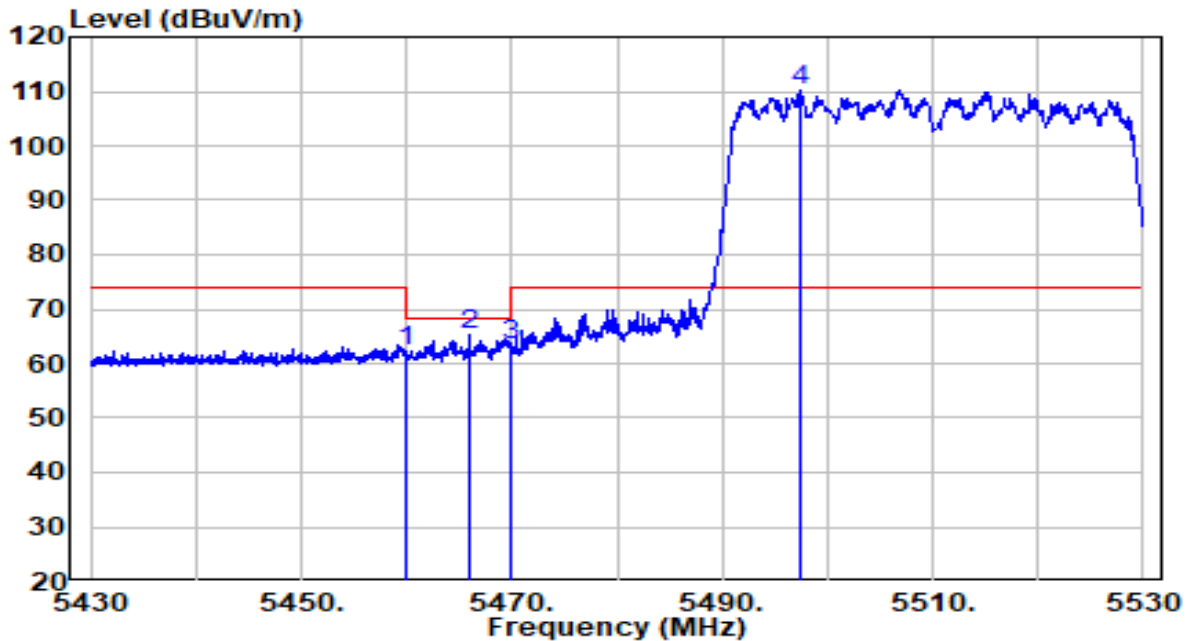


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	57.69	4.70	62.40	-5.80	68.20	Peak
2	5466.050	60.64	4.71	65.35	-2.85	68.20	Peak
3	5470.000	58.74	4.72	63.46	-4.74	68.20	Peak
4	* 5497.500	105.35	4.77	110.11	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	120V/60Hz

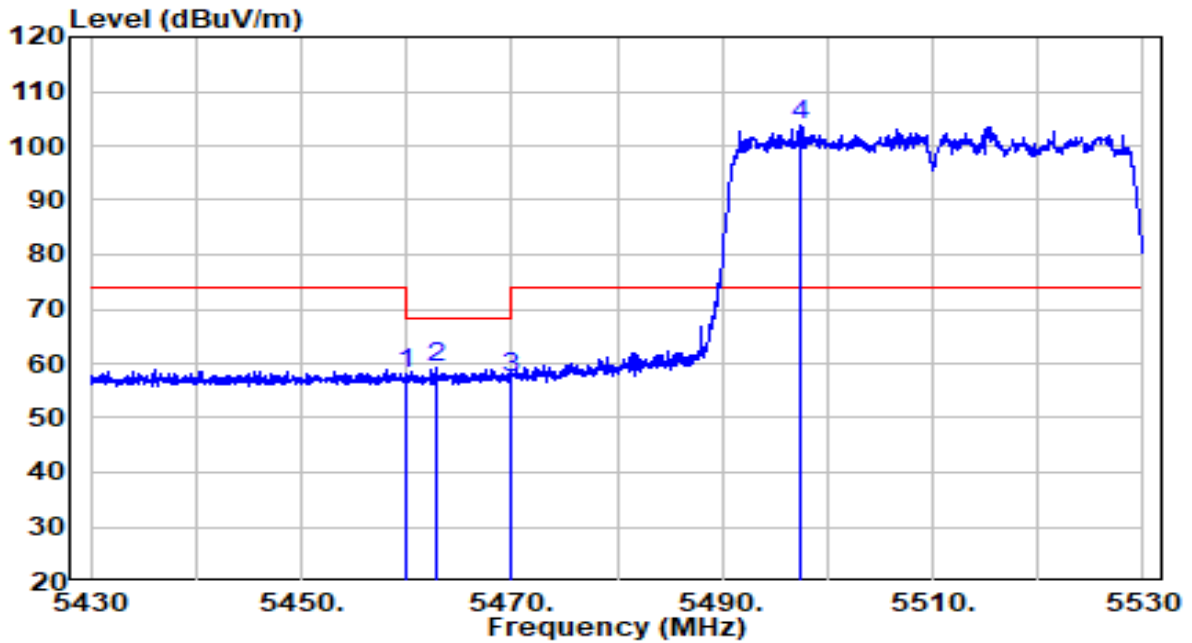


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	53.42	4.70	58.12	-10.08	68.20	Peak
2	5462.750	54.59	4.71	59.29	-8.91	68.20	Peak
3	5470.000	52.61	4.72	57.33	-10.87	68.20	Peak
4	* 5497.500	98.95	4.77	103.72	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	120V/60Hz

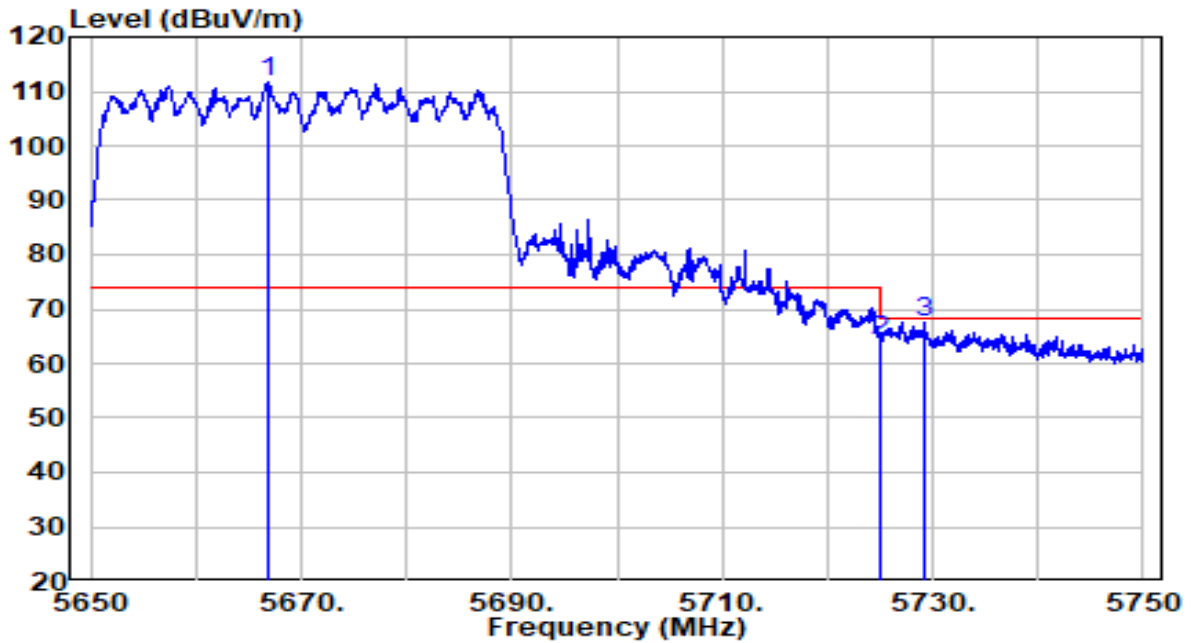


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5666.800	106.39	5.38	111.76	N/A	N/A	Peak
2	5725.000	58.56	5.59	64.14	-4.06	68.20	Peak
3	5729.150	61.77	5.60	67.37	-0.83	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	120V/60Hz

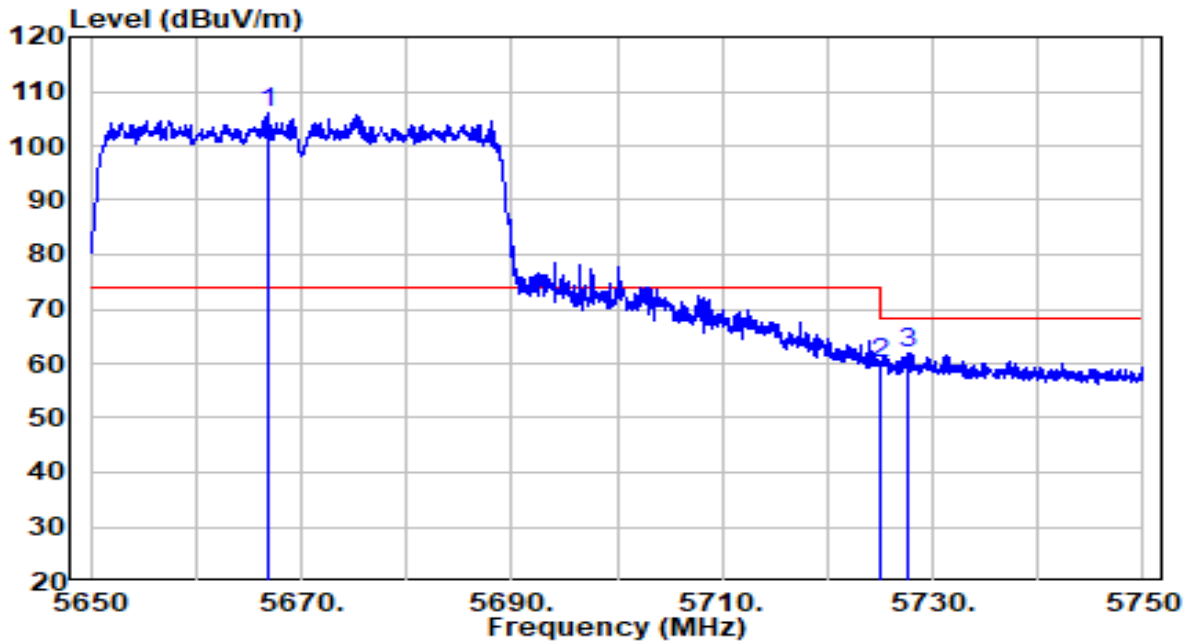


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5666.800	100.82	5.38	106.20	N/A	N/A	Peak
2	5725.000	54.44	5.59	60.03	-8.17	68.20	Peak
3	5727.550	56.27	5.60	61.87	-6.33	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	120V/60Hz

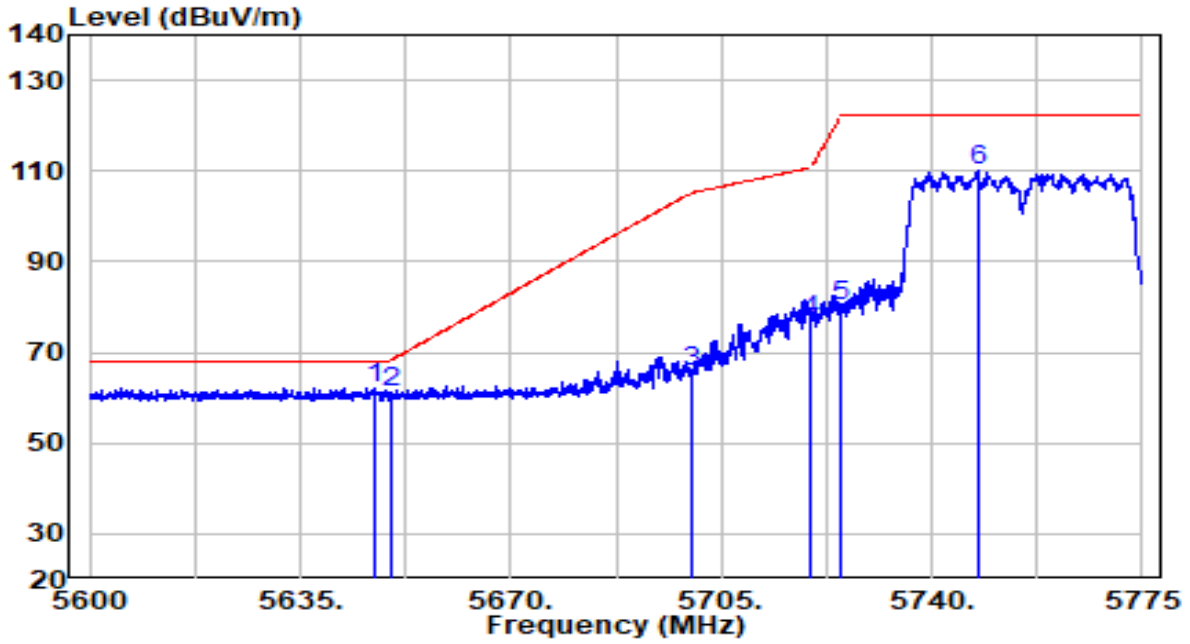


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5647.600	56.91	5.31	62.22	-5.98	68.20	Peak
2	5650.000	55.69	5.32	61.00	-7.20	68.20	Peak
3	5700.000	60.15	5.50	65.65	-39.55	105.20	Peak
4	5720.000	71.27	5.57	76.84	-33.96	110.80	Peak
5	5725.000	74.43	5.59	80.02	-42.18	122.20	Peak
6	5747.612	104.32	5.67	109.99	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	120V/60Hz

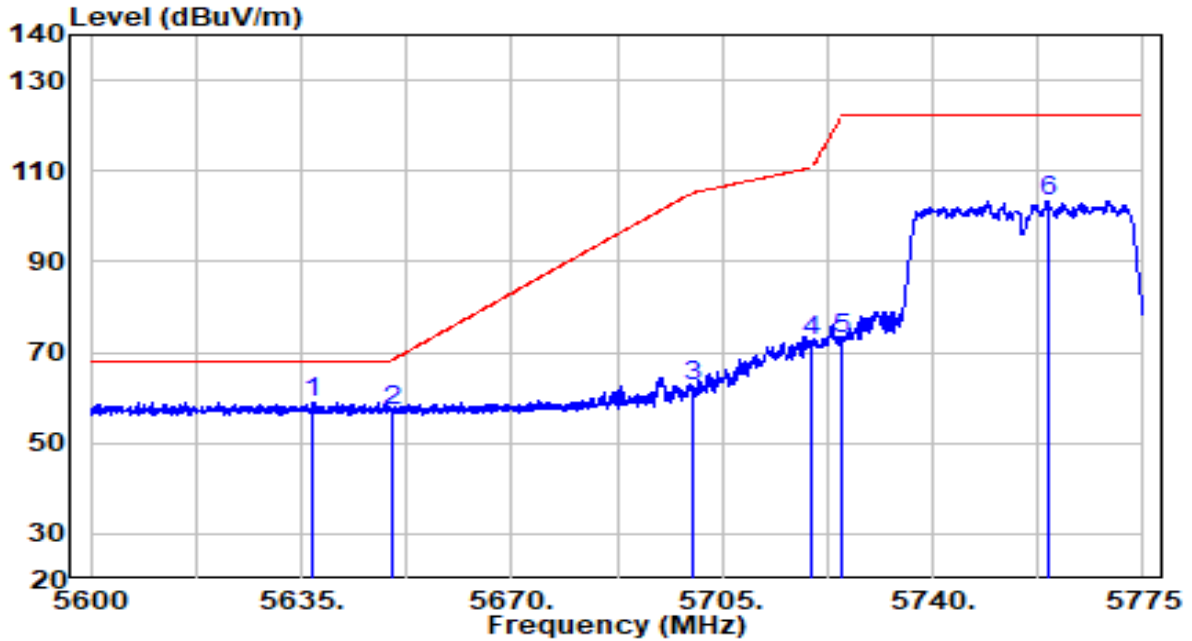


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5636.925	53.77	5.27	59.03	-9.17	68.20	Peak
2	5650.000	52.00	5.32	57.32	-10.88	68.20	Peak
3	5700.000	57.07	5.50	62.57	-42.63	105.20	Peak
4	5720.000	66.83	5.57	72.40	-38.40	110.80	Peak
5	5725.000	67.48	5.59	73.07	-49.13	122.20	Peak
6	5759.337	97.66	5.71	103.37	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	120V/60Hz

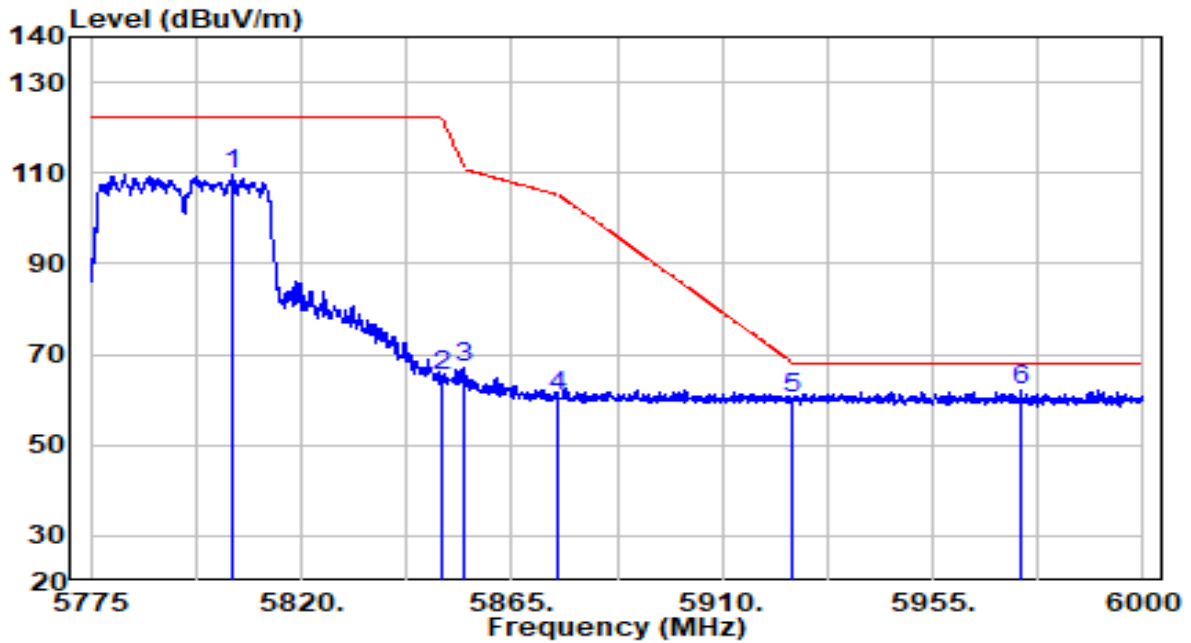


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5805.038	103.64	5.88	109.52	N/A	N/A	Peak
2	5850.000	59.07	6.04	65.11	-57.09	122.20	Peak
3	5855.000	60.82	6.06	66.88	-43.92	110.80	Peak
4	5875.000	54.46	6.13	60.60	-44.60	105.20	Peak
5	5925.000	54.08	6.32	60.39	-7.81	68.20	Peak
6	* 5973.788	55.47	6.49	61.97	-6.23	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	120V/60Hz

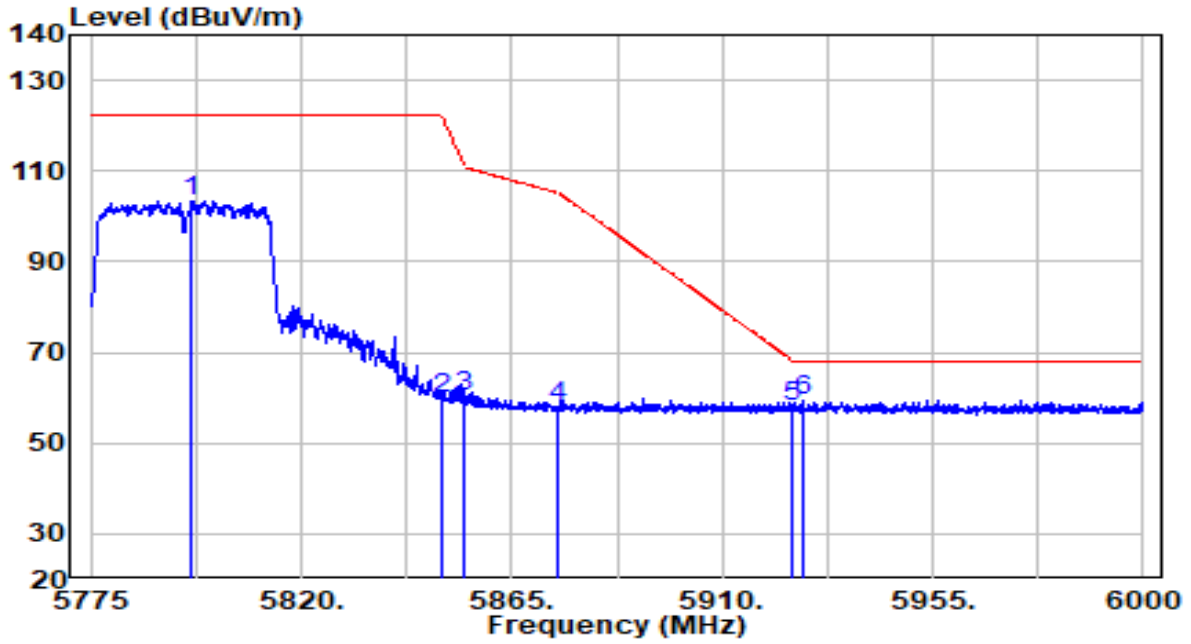


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5796.600	97.57	5.85	103.42	N/A	N/A	Peak
2	5850.000	53.63	6.04	59.67	-62.53	122.20	Peak
3	5855.000	54.31	6.06	60.38	-50.42	110.80	Peak
4	5875.000	51.80	6.13	57.94	-47.26	105.20	Peak
5	5925.000	51.87	6.32	58.18	-10.02	68.20	Peak
6	* 5927.212	53.15	6.33	59.47	-8.73	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

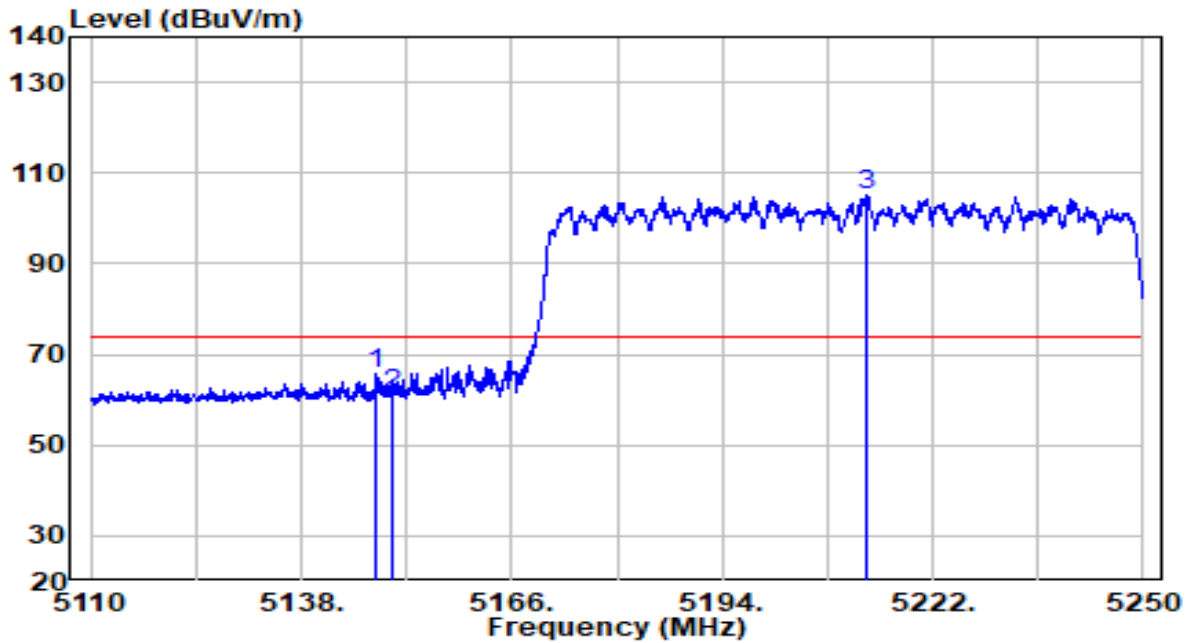


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.010	61.50	4.19	65.69	-8.31	74.00	Peak
2	5150.000	57.03	4.20	61.23	-12.77	74.00	Peak
3	* 5213.180	100.64	4.30	104.94	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

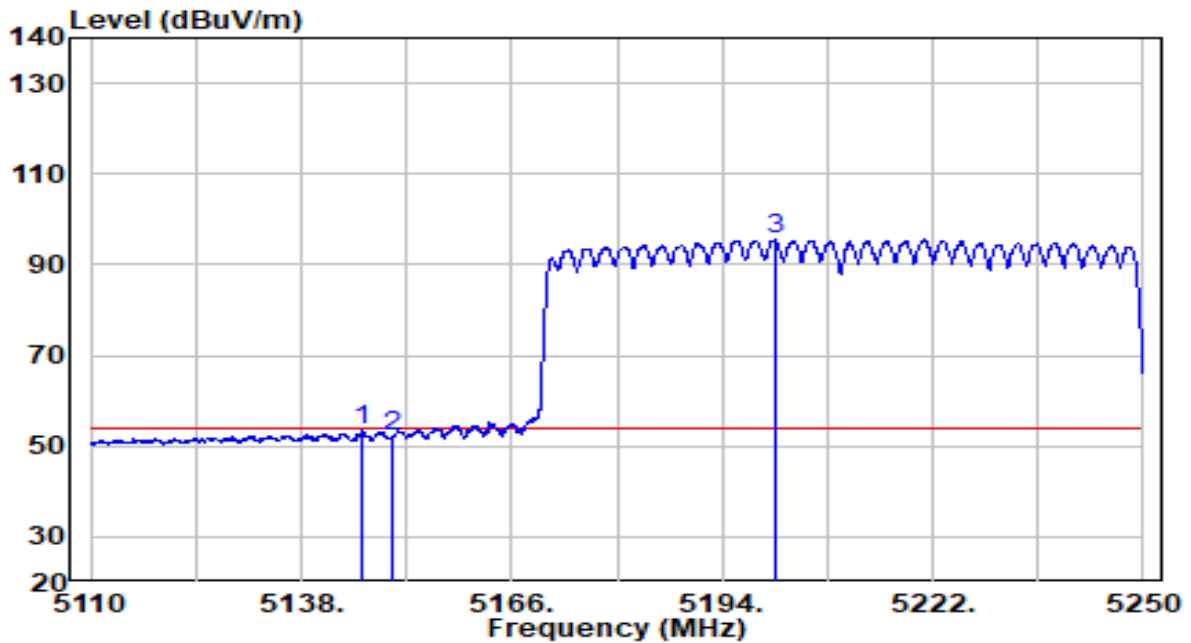


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5146.190	49.20	4.19	53.39	-0.61	54.00	Average
2	5150.000	47.75	4.20	51.95	-2.05	54.00	Average
3	* 5200.930	91.25	4.28	95.53	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

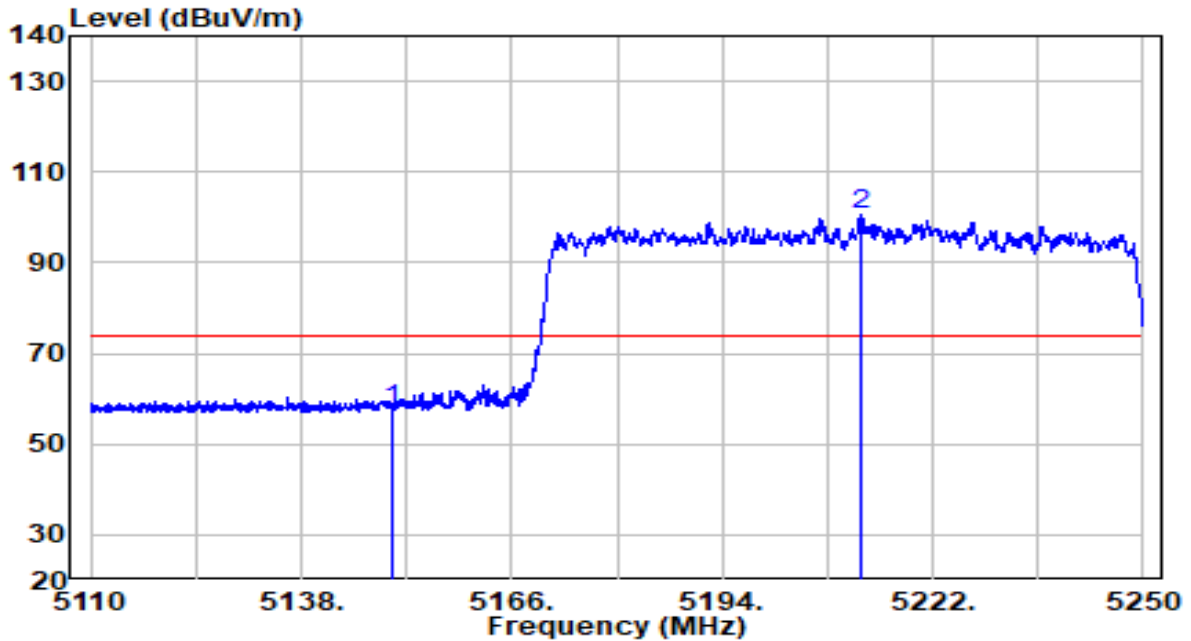


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	53.28	4.20	57.48	-16.52	74.00	Peak
2	* 5212.550	96.38	4.30	100.68	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-14
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

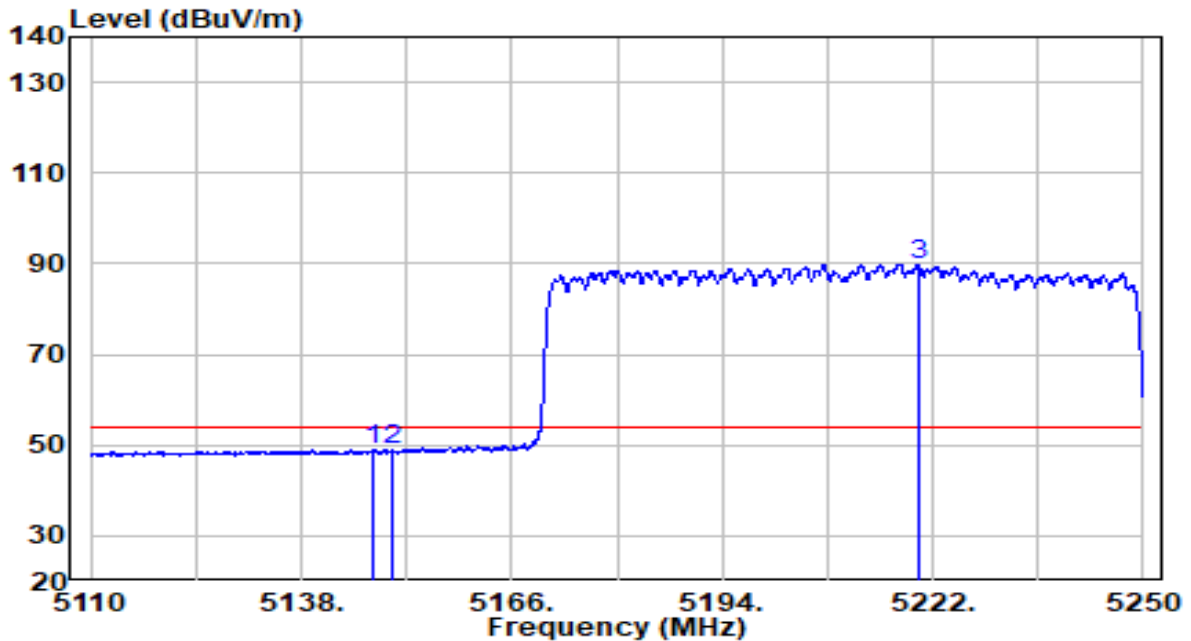


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.660	44.93	4.19	49.12	-4.88	54.00	Average
2	5150.000	44.57	4.20	48.77	-5.23	54.00	Average
3	* 5220.040	85.61	4.31	89.92	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	120V/60Hz

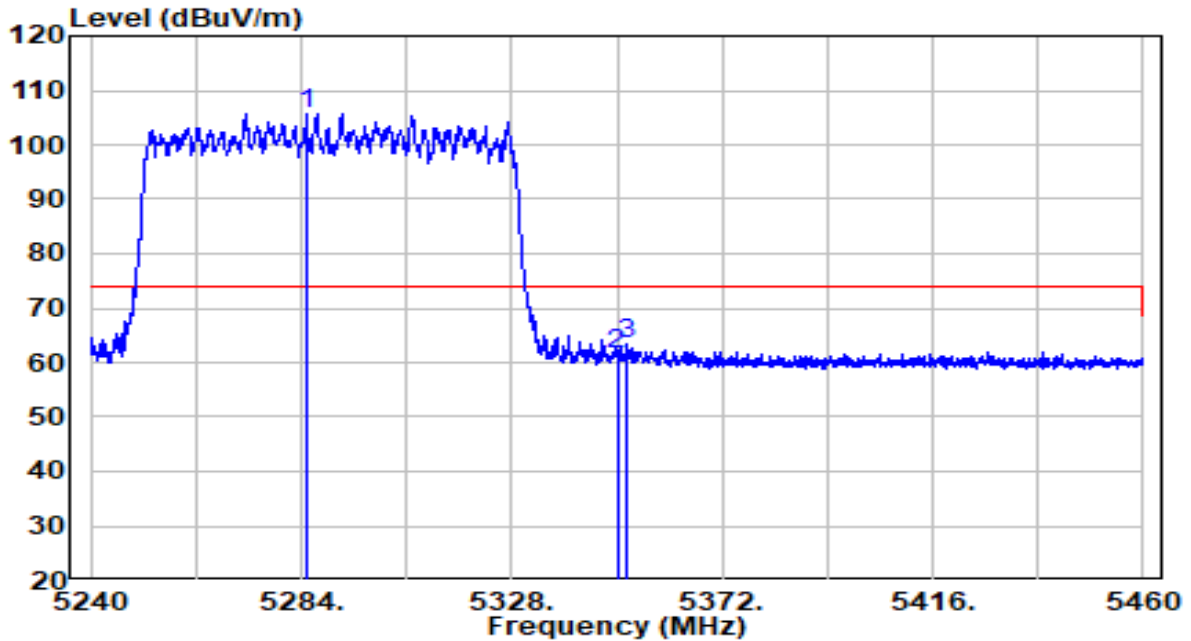


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5285.100	101.29	4.42	105.71	N/A	N/A	Peak
2	5350.000	56.96	4.52	61.49	-12.51	74.00	Peak
3	5352.090	58.79	4.53	63.32	-10.68	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	120V/60Hz

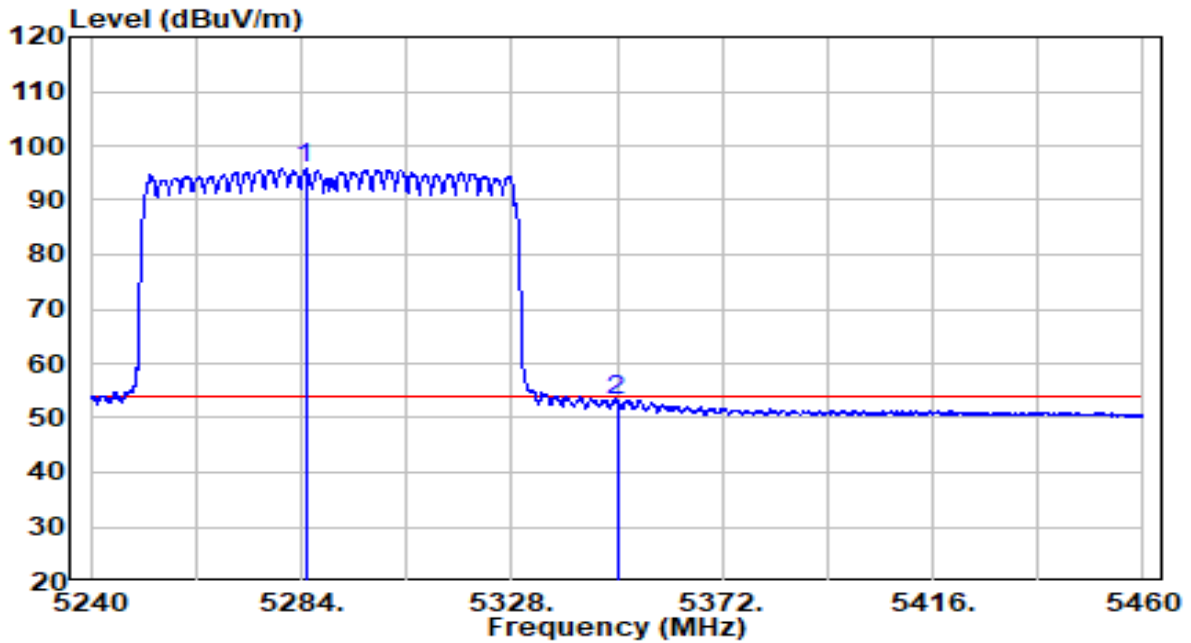


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5284.880	91.26	4.42	95.67	N/A	N/A	Average
2	5350.000	48.65	4.52	53.18	-0.82	54.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	120V/60Hz

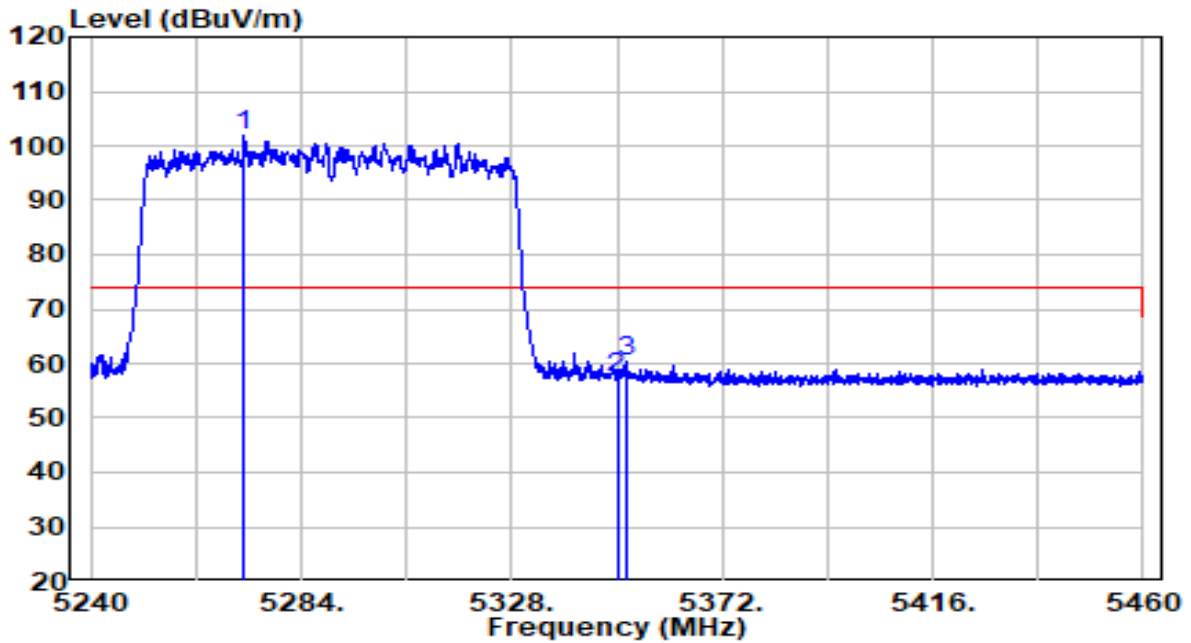


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5272.010	97.65	4.40	102.04	N/A	N/A	Peak
2	5350.000	52.94	4.52	57.47	-16.53	74.00	Peak
3	5351.760	55.73	4.53	60.26	-13.74	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	120V/60Hz

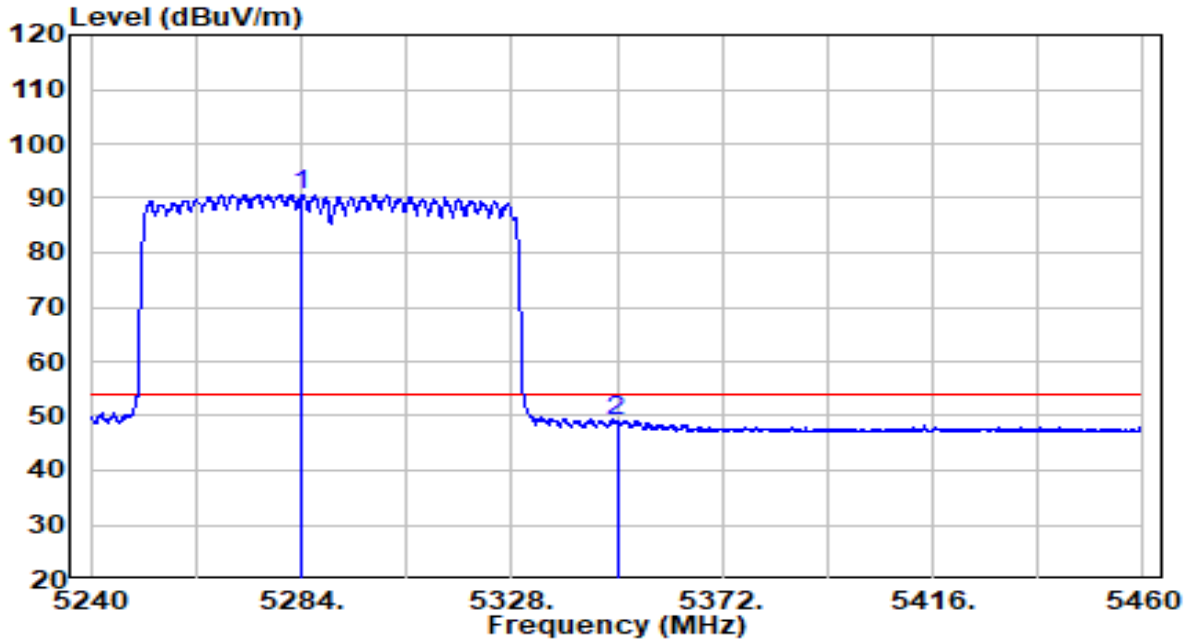


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5284.220	86.32	4.42	90.74	N/A	N/A	Average
2	5350.000	44.67	4.52	49.19	-4.81	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	120V/60Hz

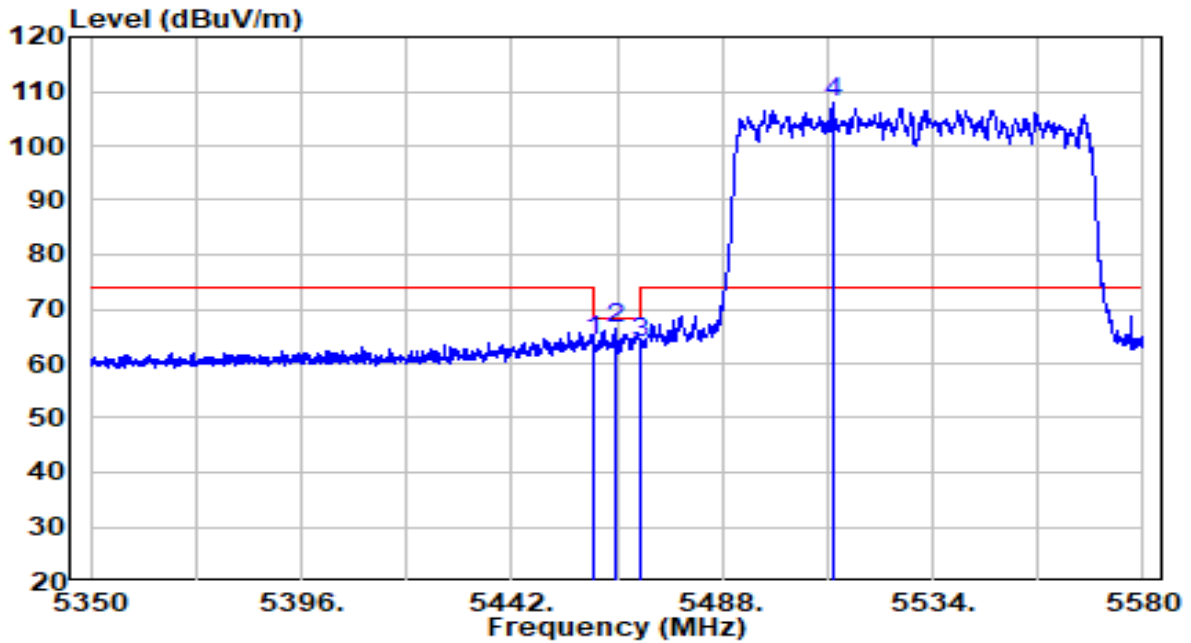


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.055	59.57	4.70	64.27	-3.93	68.20	Peak
2	5464.540	61.59	4.71	66.31	-1.89	68.20	Peak
3	5470.000	59.01	4.72	63.73	-4.47	68.20	Peak
4	* 5512.150	102.92	4.81	107.74	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	120V/60Hz

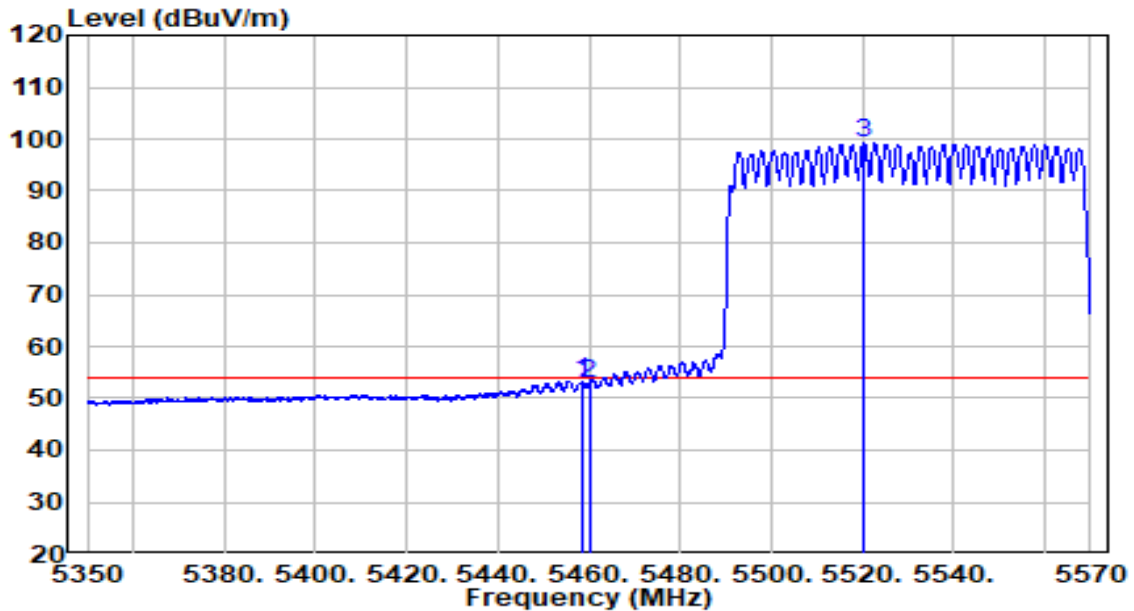


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.350	48.58	4.70	53.29	-0.71	54.00	Average
2	5460.000	48.13	4.70	52.83	-1.17	54.00	Average
3	* 5520.280	94.33	4.84	99.18	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)+ 16dB Attenuation (dB) – Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	120V/60Hz

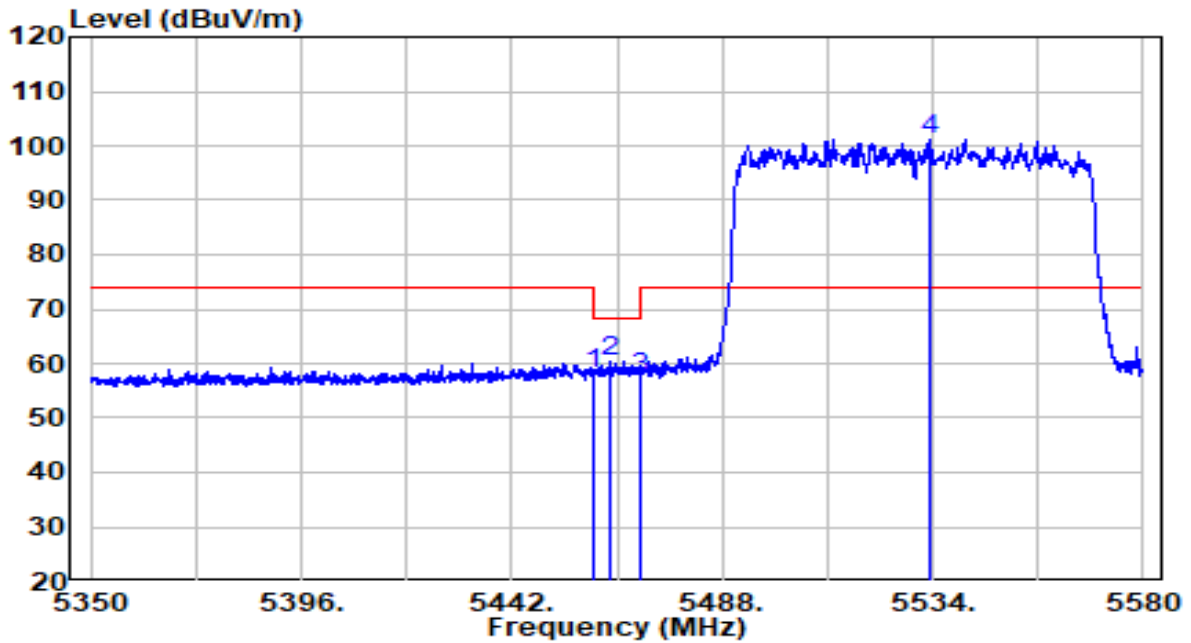


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5460.000	53.38	4.70	58.08	-10.12	68.20	Peak
2	5463.275	55.86	4.71	60.57	-7.63	68.20	Peak
3	5470.000	52.82	4.72	57.54	-10.66	68.20	Peak
4	* 5533.425	96.37	4.89	101.26	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	120V/60Hz

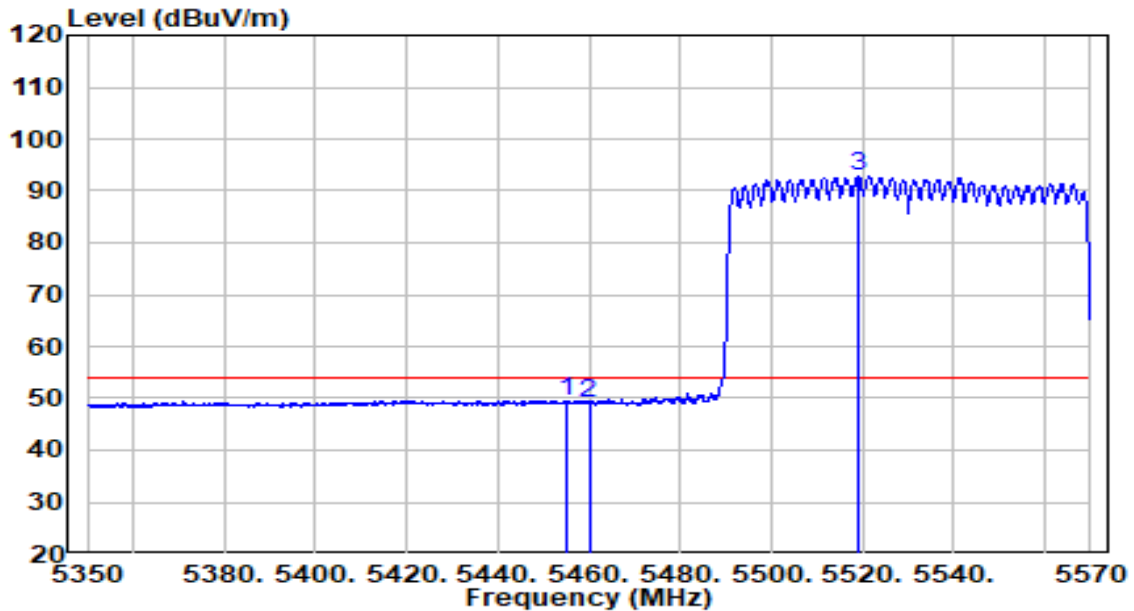


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5454.940	44.91	4.70	49.60	-4.40	54.00	Average
2	5460.000	44.42	4.70	49.12	-4.88	54.00	Average
3	* 5518.960	88.03	4.84	92.87	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz	Test Voltage	120V/60Hz

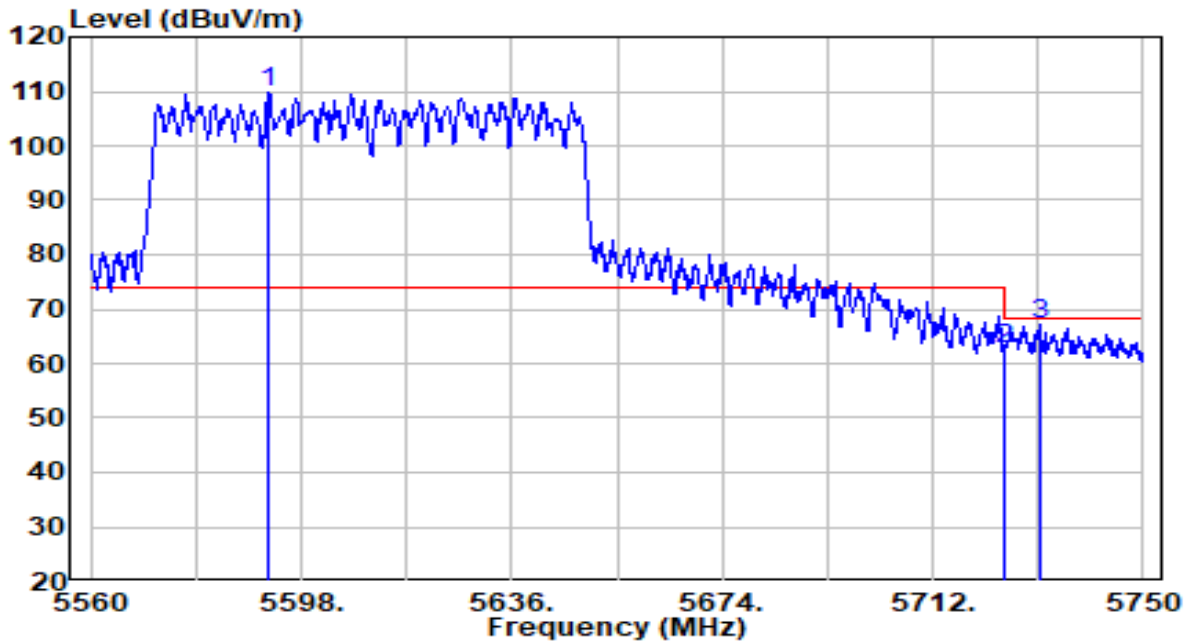


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5592.110	104.65	5.11	109.76	N/A	N/A	Peak
2	5725.000	57.09	5.59	62.68	-5.52	68.20	Peak
3	5731.285	61.63	5.61	67.24	-0.96	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-10
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz	Test Voltage	120V/60Hz

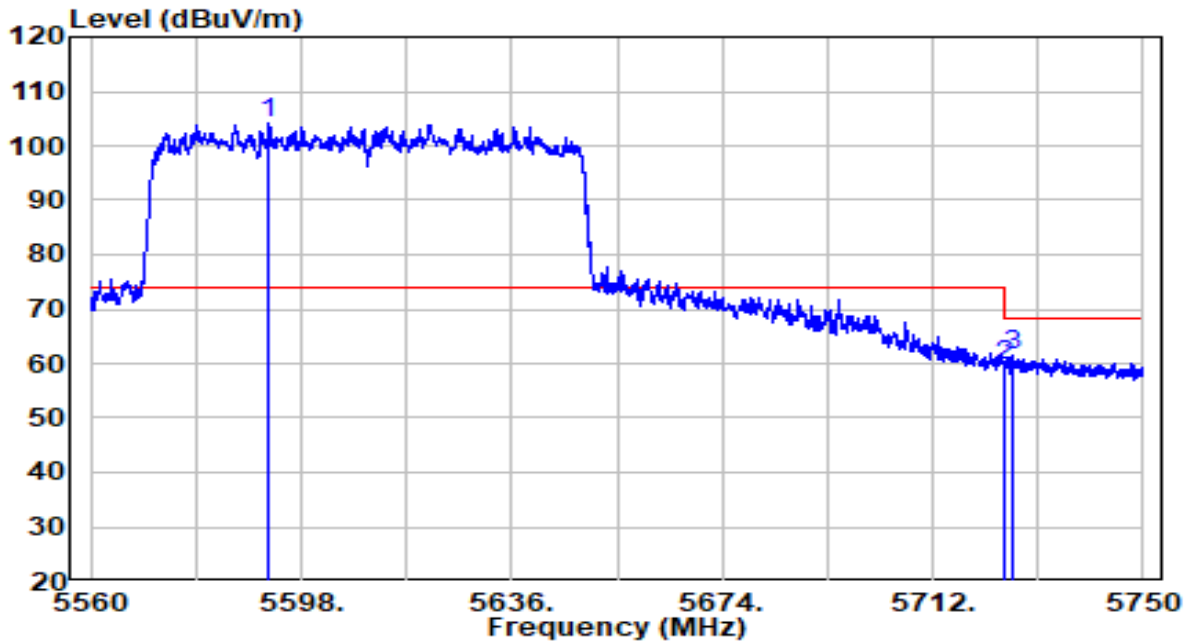


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5592.110	98.94	5.11	104.05	N/A	N/A	Peak
2	5725.000	53.86	5.59	59.45	-8.75	68.20	Peak
3	5726.345	55.81	5.59	61.41	-6.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	120V/60Hz

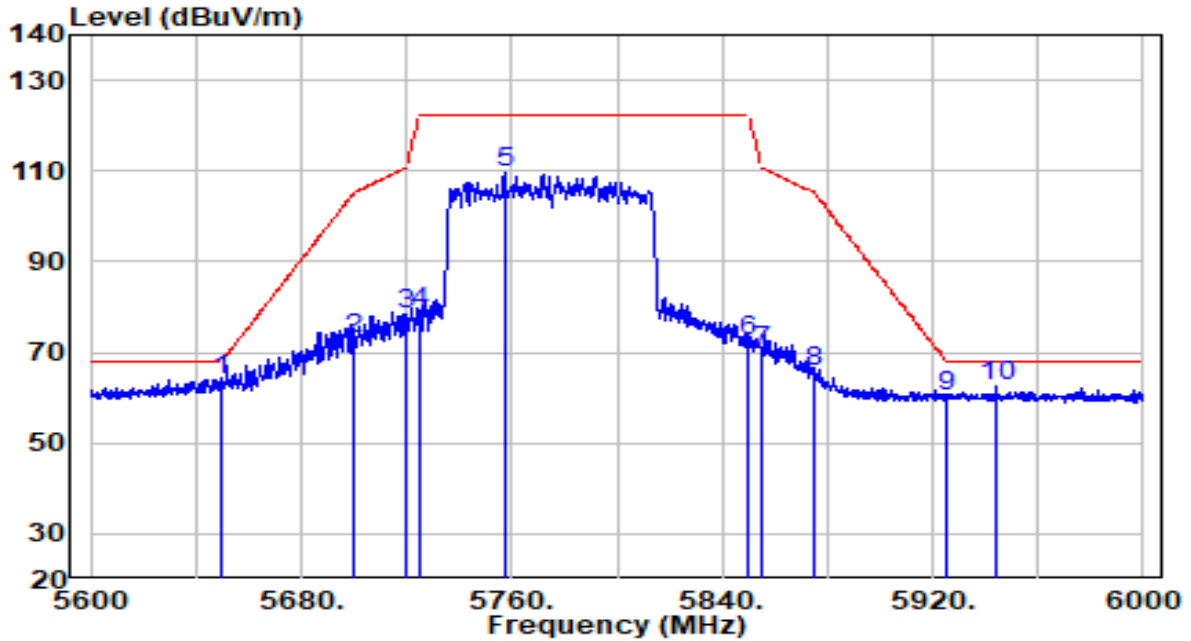


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5650.000	58.74	5.32	64.06	-4.14	68.20	Peak
2	5700.000	67.70	5.50	73.19	-32.01	105.20	Peak
3	5720.000	72.68	5.57	78.25	-32.55	110.80	Peak
4	5725.000	73.17	5.59	78.76	-43.44	122.20	Peak
5	5757.200	103.75	5.71	109.46	N/A	N/A	Peak
6	5850.000	66.51	6.04	72.56	-49.64	122.20	Peak
7	5855.000	64.40	6.06	70.46	-40.34	110.80	Peak
8	5875.000	59.53	6.13	65.67	-39.53	105.20	Peak
9	5925.000	54.01	6.32	60.33	-7.87	68.20	Peak
10	5944.600	56.11	6.39	62.50	-5.70	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-13
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	24.8°C/50.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	120V/60Hz

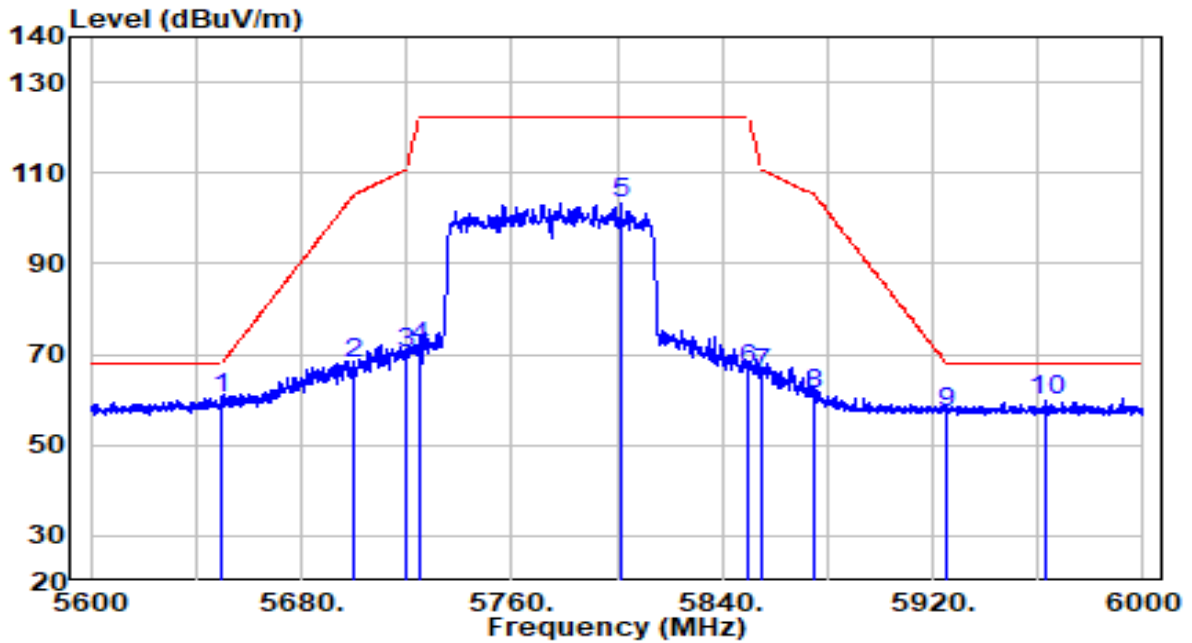


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5650.000	54.77	5.32	60.09	-8.11	68.20	Peak
2	5700.000	62.40	5.50	67.90	-37.30	105.20	Peak
3	5720.000	64.62	5.57	70.19	-40.61	110.80	Peak
4	5725.000	65.84	5.59	71.43	-50.77	122.20	Peak
5	5801.600	97.35	5.87	103.22	N/A	N/A	Peak
6	5850.000	60.78	6.04	66.83	-55.37	122.20	Peak
7	5855.000	59.88	6.06	65.94	-44.86	110.80	Peak
8	5875.000	55.10	6.13	61.24	-43.96	105.20	Peak
9	5925.000	51.04	6.32	57.35	-10.85	68.20	Peak
10	5963.400	53.18	6.46	59.64	-8.56	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE160 at Channel 5250MHz	Test Voltage	120V/60Hz

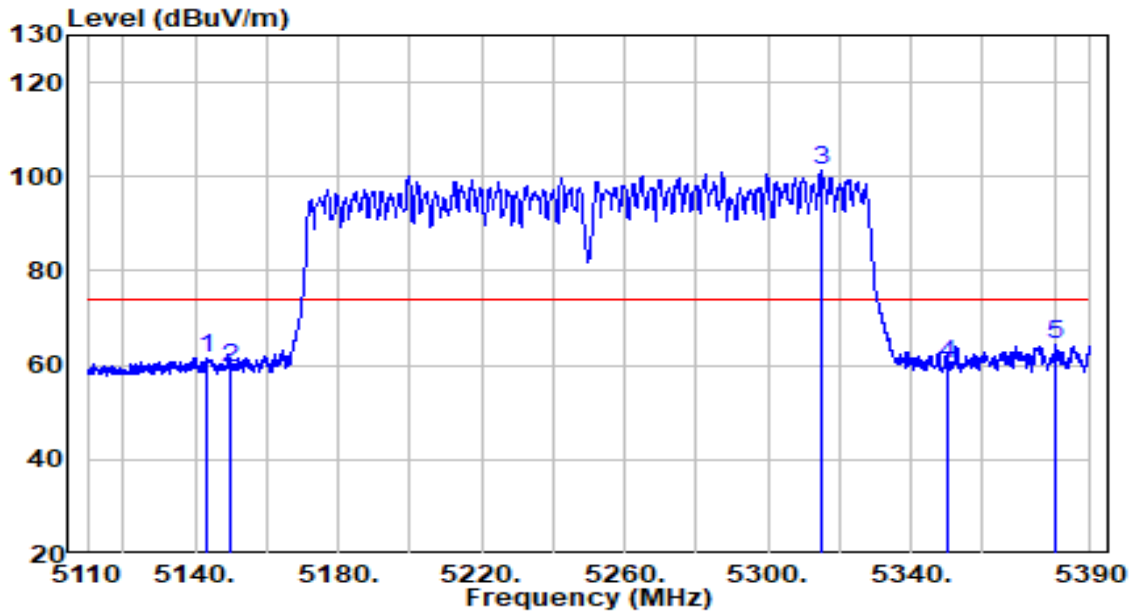


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5143.600	57.50	4.19	61.68	-12.32	74.00	Peak
2	5150.000	55.23	4.20	59.42	-14.58	74.00	Peak
3	* 5314.960	96.91	4.47	101.38	N/A	N/A	Peak
4	5350.000	55.54	4.52	60.06	-13.94	74.00	Peak
5	5380.340	59.72	4.57	64.29	-9.71	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE160 at Channel 5250MHz	Test Voltage	120V/60Hz

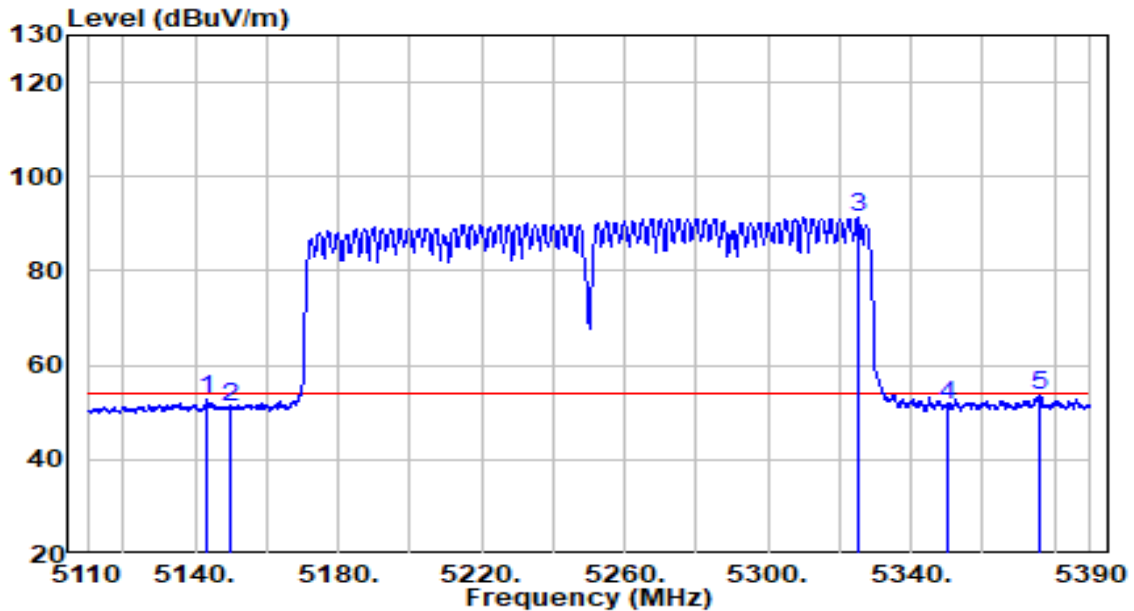


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5143.600	48.43	4.19	52.61	-1.39	54.00	Average
2	5150.000	47.08	4.20	51.27	-2.73	54.00	Average
3	* 5325.040	86.80	4.48	91.28	N/A	N/A	Average
4	5349.960	47.20	4.52	51.73	-2.27	54.00	Average
5	5376.140	48.93	4.57	53.50	-0.50	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE160 at Channel 5250MHz	Test Voltage	120V/60Hz

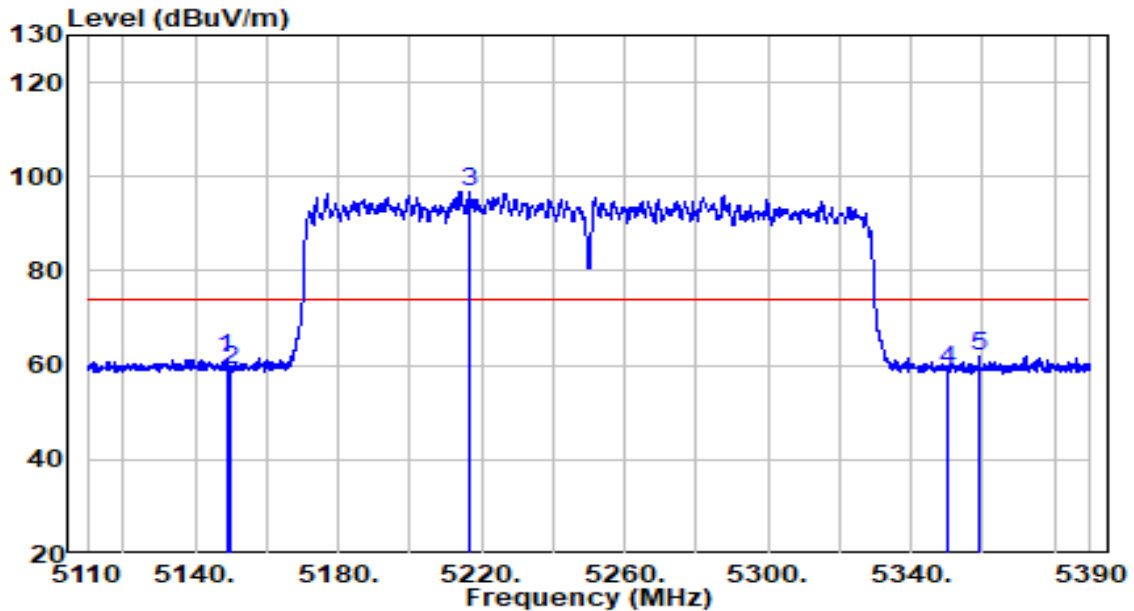


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.780	57.50	4.19	61.69	-12.31	74.00	Peak
2	5150.000	54.89	4.20	59.09	-14.91	74.00	Peak
3	* 5216.680	92.65	4.31	96.96	N/A	N/A	Peak
4	5350.000	54.30	4.52	58.83	-15.17	74.00	Peak
5	5358.780	57.39	4.54	61.93	-12.07	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE160 at Channel 5250MHz	Test Voltage	120V/60Hz

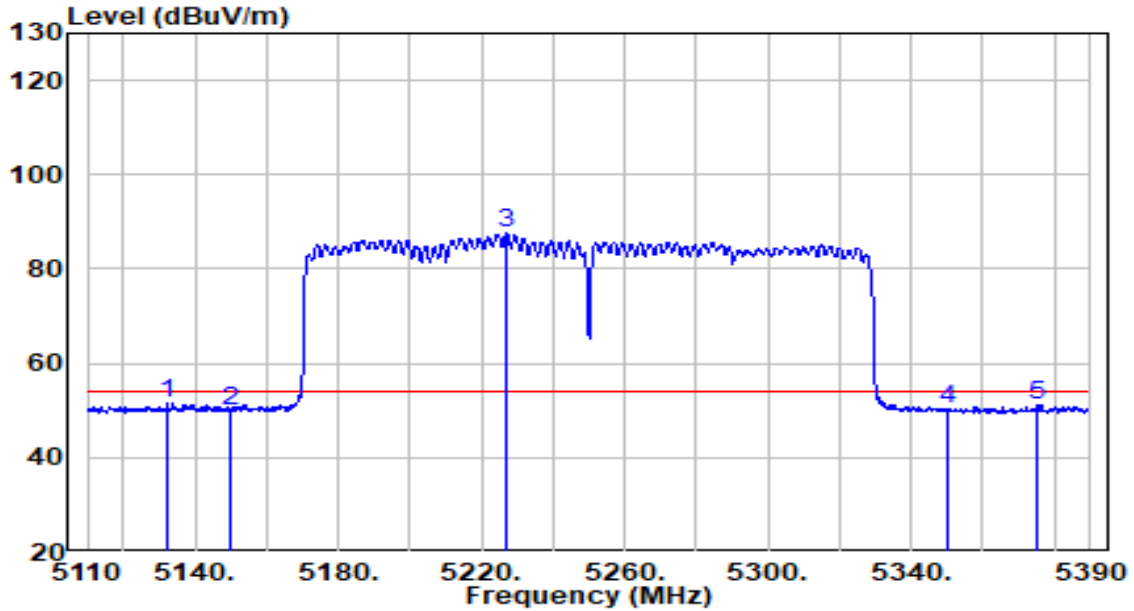


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5132.260	47.31	4.17	51.48	-2.52	54.00	Average
2	5150.000	45.62	4.20	49.82	-4.18	54.00	Average
3	* 5226.900	83.20	4.32	87.52	N/A	N/A	Average
4	5350.000	45.74	4.52	50.26	-3.74	54.00	Average
5	5374.880	46.52	4.56	51.09	-2.91	54.00	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE160 at Channel 5570MHz	Test Voltage	120V/60Hz

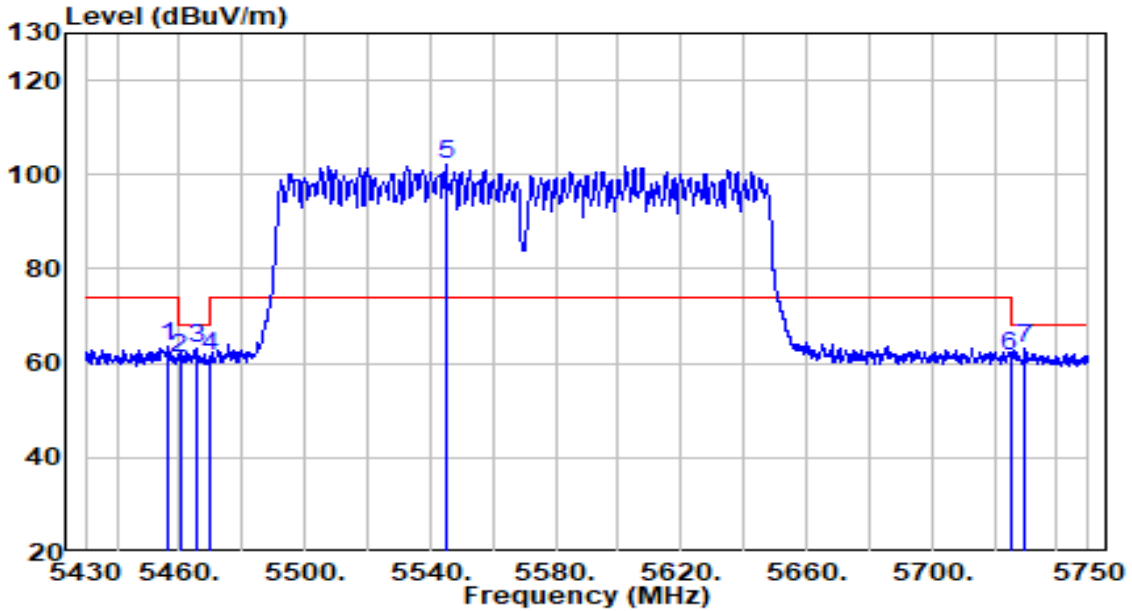


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.080	58.87	4.70	63.56	-10.44	74.00	Peak
2	5460.080	56.36	4.70	61.07	-7.13	68.20	Peak
3	5465.200	58.25	4.71	62.97	-5.23	68.20	Peak
4	5470.000	56.62	4.72	61.34	-6.86	68.20	Peak
5	* 5544.880	97.34	4.93	102.28	N/A	N/A	Peak
6	5725.000	56.09	5.59	61.68	-6.52	68.20	Peak
7	5729.840	57.40	5.61	63.01	-5.19	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE160 at Channel 5570MHz	Test Voltage	120V/60Hz

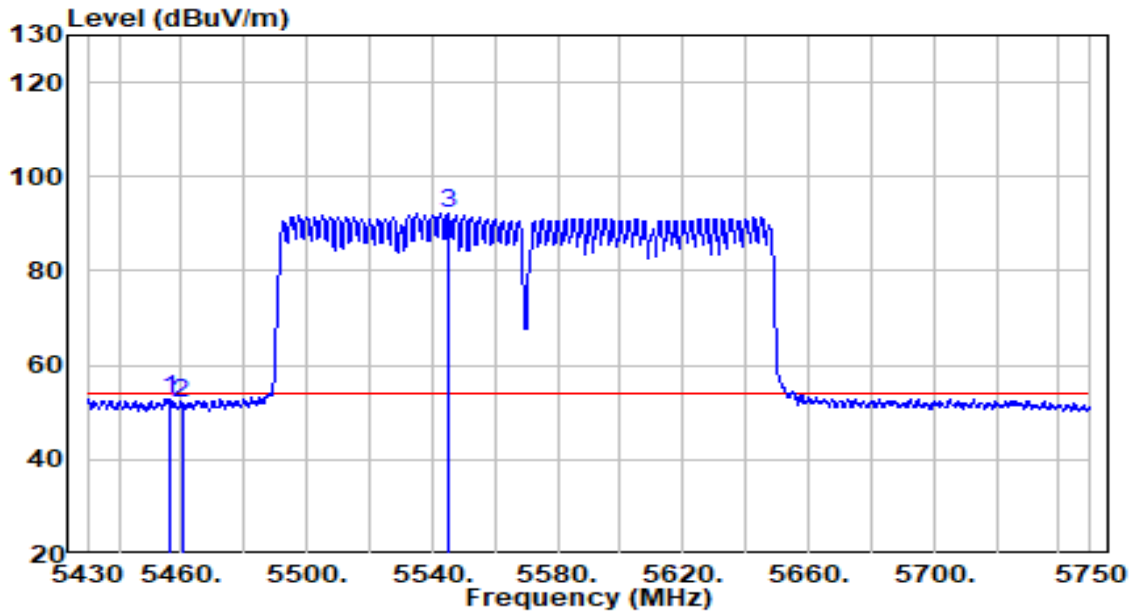


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5455.920	48.15	4.70	52.85	-1.15	54.00	Average
2	5460.080	47.40	4.70	52.11	-1.89	54.00	Average
3	* 5545.200	87.30	4.93	92.23	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE160 at Channel 5570MHz	Test Voltage	120V/60Hz

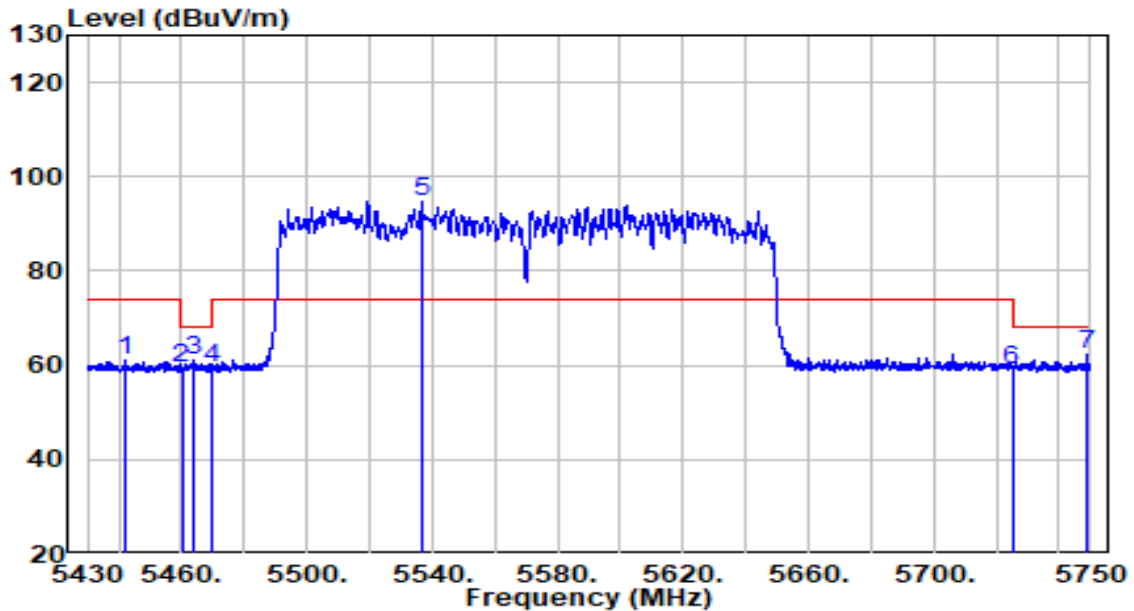


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5442.000	56.24	4.67	60.92	-13.08	74.00	Peak
2	5460.080	54.69	4.70	59.39	-8.81	68.20	Peak
3	5463.600	56.27	4.71	60.98	-7.22	68.20	Peak
4	5470.000	54.75	4.72	59.47	-8.73	68.20	Peak
5	* 5536.880	89.94	4.90	94.84	N/A	N/A	Peak
6	5725.000	53.50	5.59	59.09	-9.11	68.20	Peak
7	5748.880	56.78	5.68	62.46	-5.74	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-11
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	23.2°C/52.7%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit by 802.11ax-HE160 at Channel 5570MHz	Test Voltage	120V/60Hz

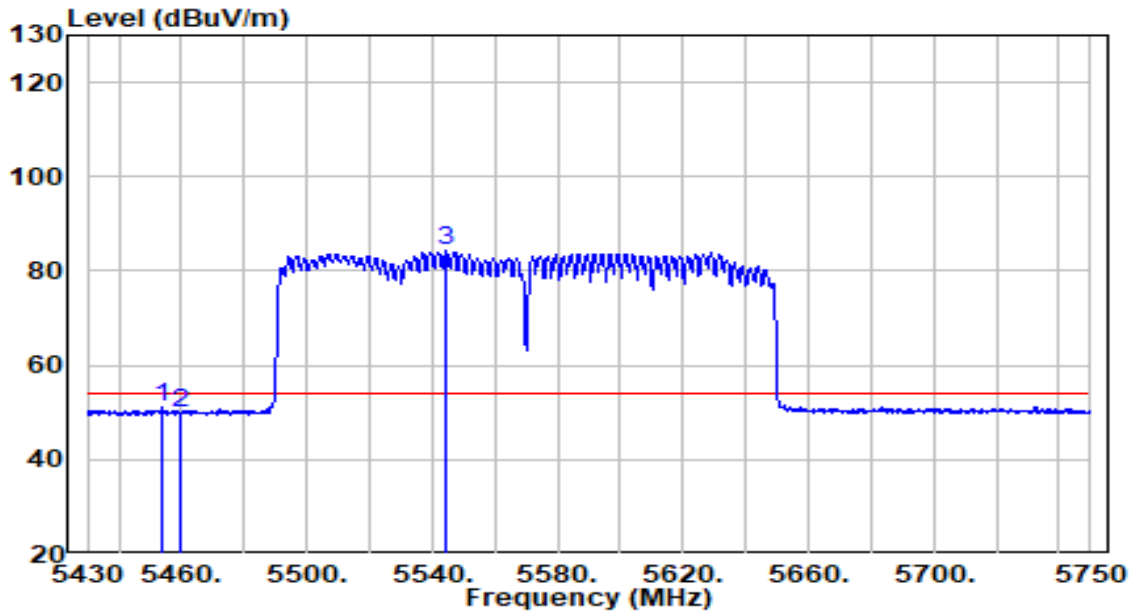


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5453.520	46.39	4.69	51.08	-2.92	54.00	Average
2	5460.000	45.02	4.70	49.72	-4.28	54.00	Average
3	* 5544.400	79.27	4.93	84.20	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

Sunyear (Path C _ Partial Path)

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11a	Test Voltage	120V/60Hz

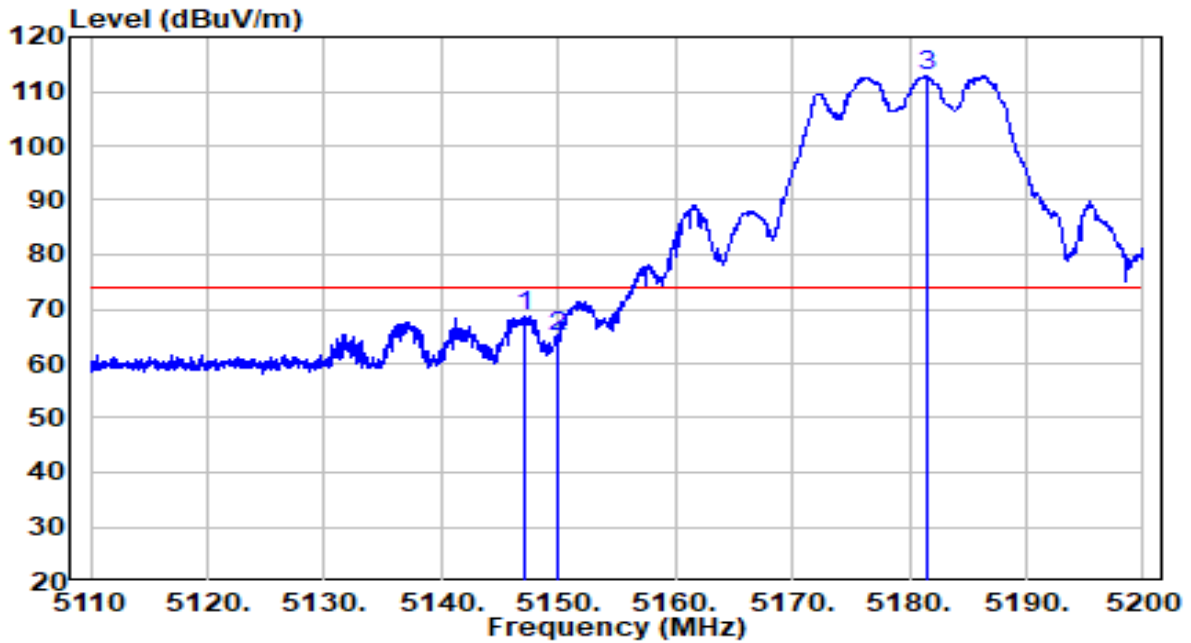


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.215	64.56	4.19	68.75	-5.25	74.00	Peak
2	5150.000	60.64	4.20	64.84	-9.16	74.00	Peak
3	* 5181.460	108.75	4.25	113.00	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11a	Test Voltage	120V/60Hz

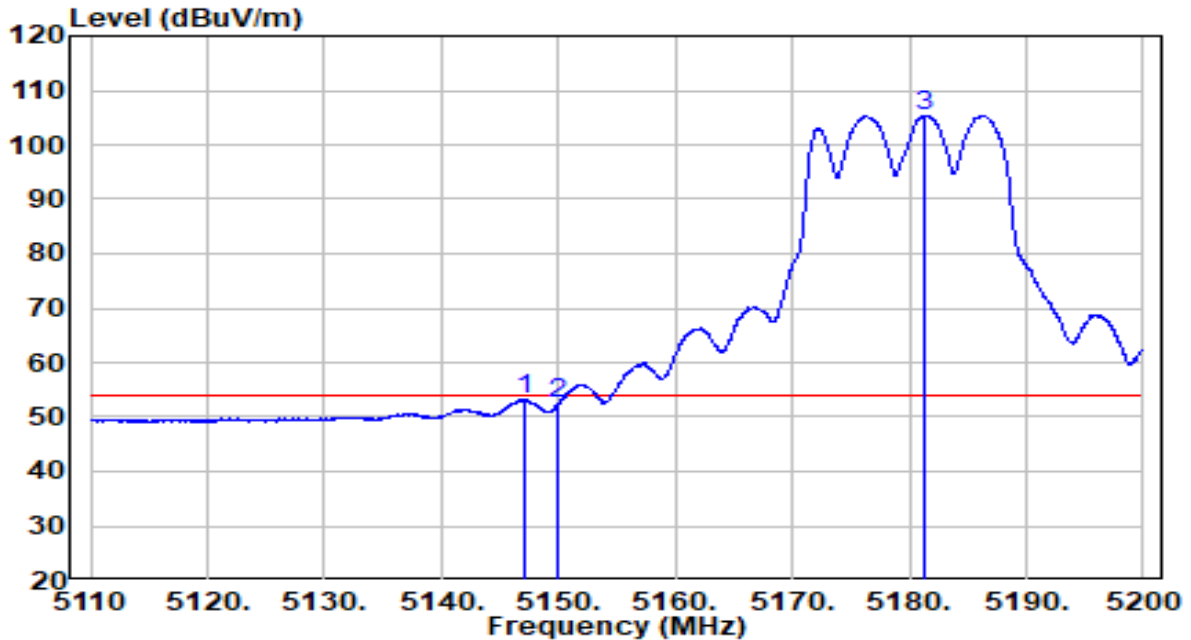


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5147.170	48.96	4.19	53.15	-0.85	54.00	Average
2	5150.000	48.21	4.20	52.41	-1.59	54.00	Average
3	* 5181.325	101.05	4.25	105.30	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11a	Test Voltage	120V/60Hz

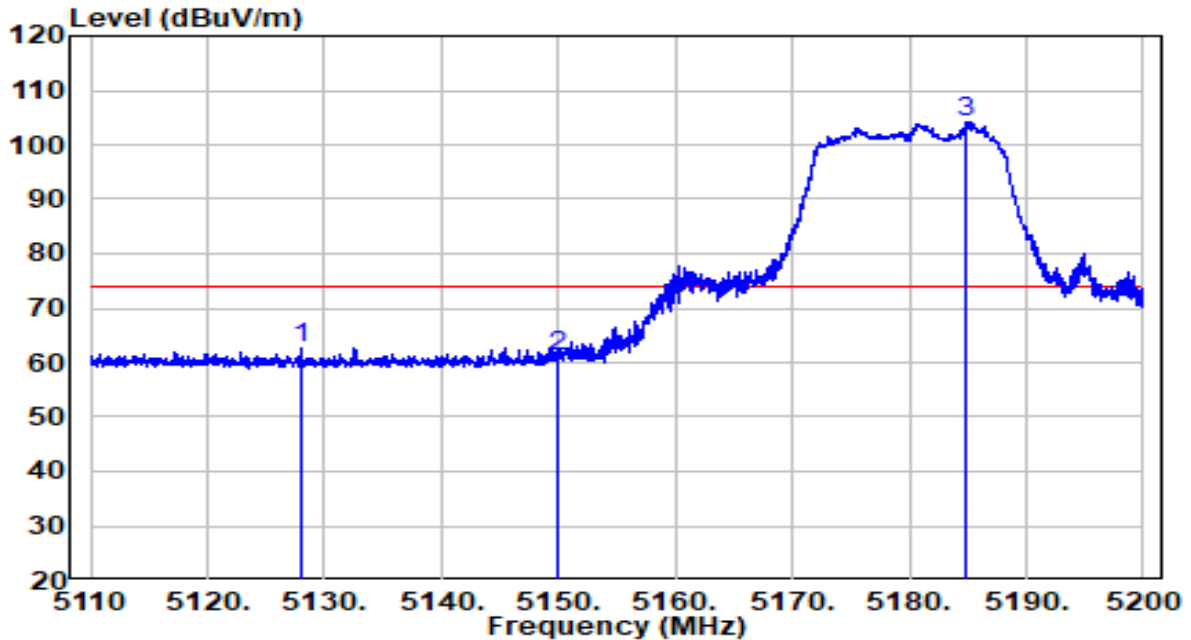


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5128.000	58.48	4.16	62.64	-11.36	74.00	Peak
2	5150.000	57.10	4.20	61.30	-12.70	74.00	Peak
3	* 5184.925	99.92	4.25	104.18	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11a	Test Voltage	120V/60Hz

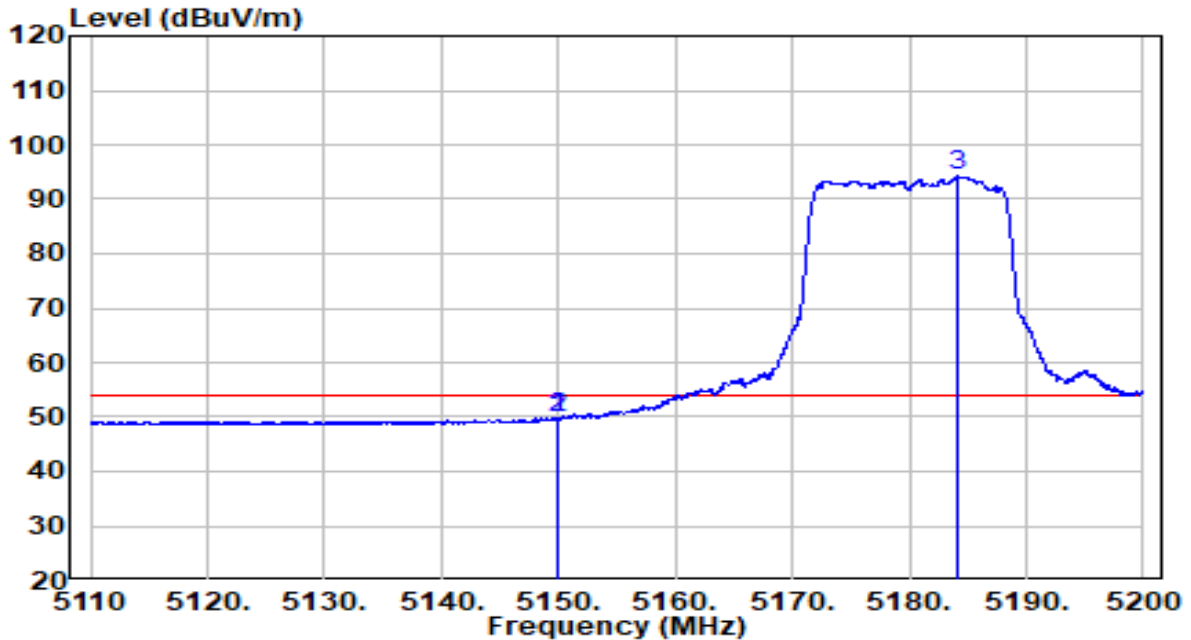


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5149.915	45.65	4.20	49.84	-4.16	54.00	Average
2	5150.000	45.59	4.20	49.79	-4.21	54.00	Average
3	* 5184.115	89.98	4.25	94.23	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11ac-VHT20	Test Voltage	120V/60Hz

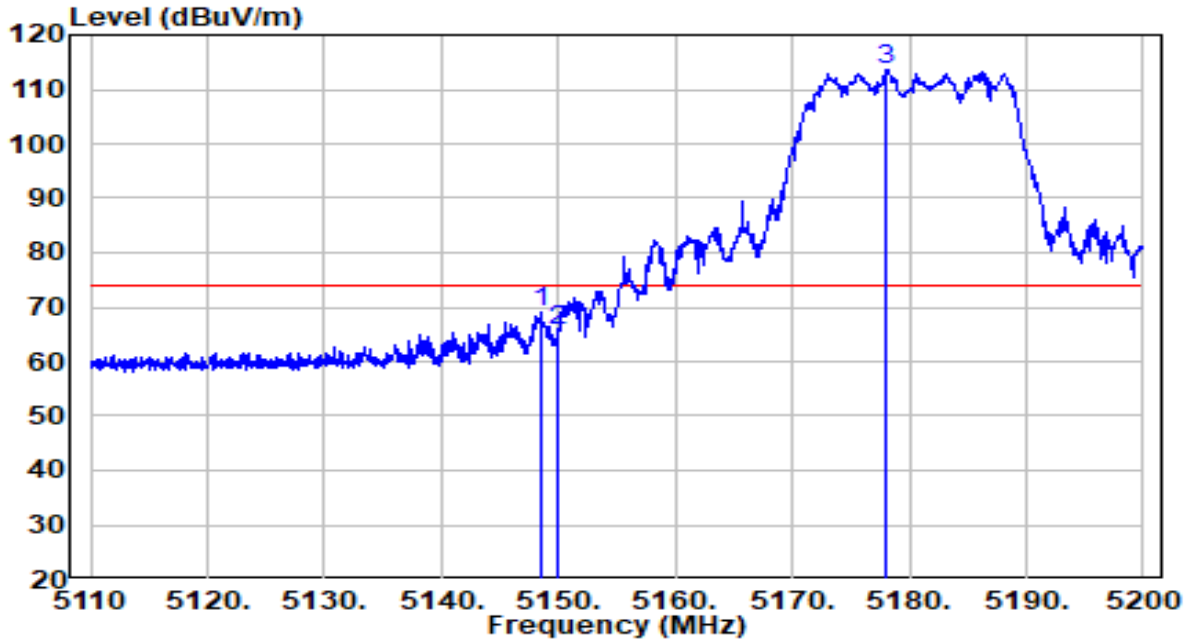


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.520	64.96	4.19	69.16	-4.84	74.00	Peak
2	5150.000	61.49	4.20	65.69	-8.31	74.00	Peak
3	* 5178.085	109.23	4.24	113.47	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11ac-VHT20	Test Voltage	120V/60Hz

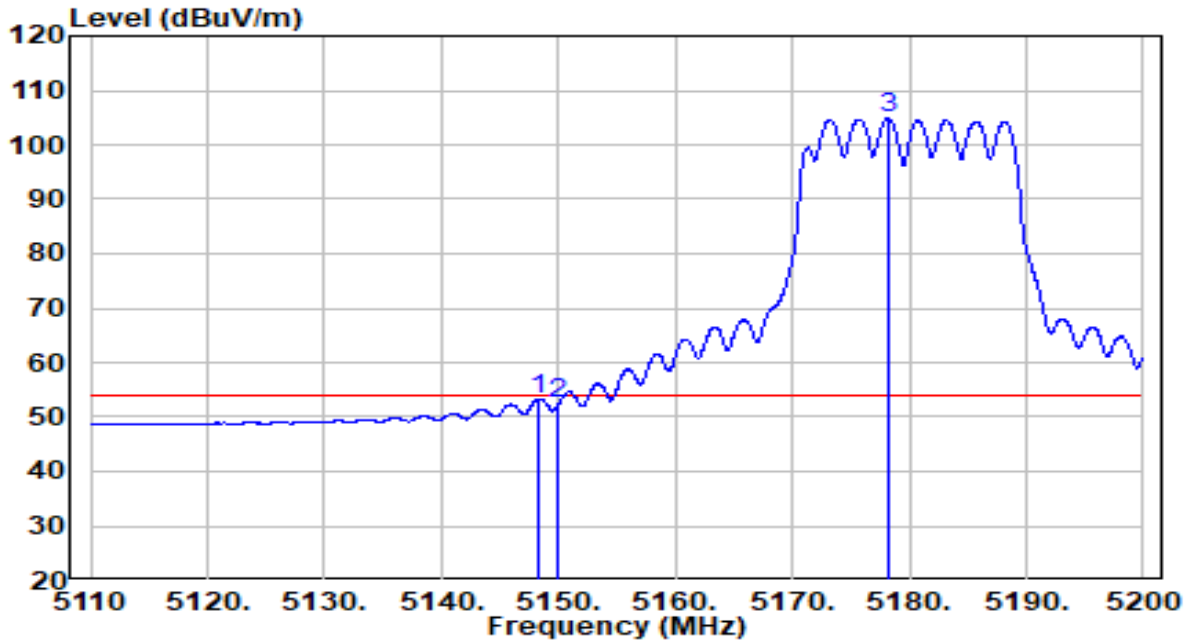


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5148.385	49.10	4.19	53.29	-0.71	54.00	Average
2	5150.000	48.12	4.20	52.32	-1.68	54.00	Average
3	* 5178.175	100.51	4.24	104.75	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11ac-VHT20	Test Voltage	120V/60Hz

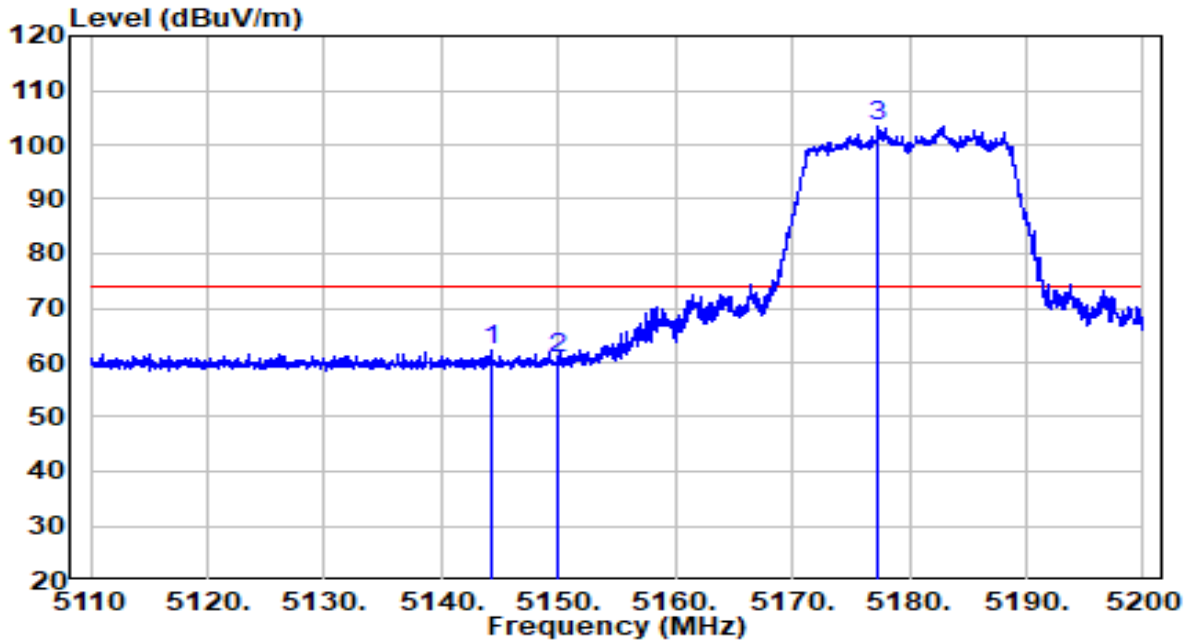


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5144.335	57.90	4.19	62.09	-11.91	74.00	Peak
2	5150.000	56.46	4.20	60.66	-13.34	74.00	Peak
3	* 5177.365	99.21	4.24	103.45	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11ac-VHT20	Test Voltage	120V/60Hz

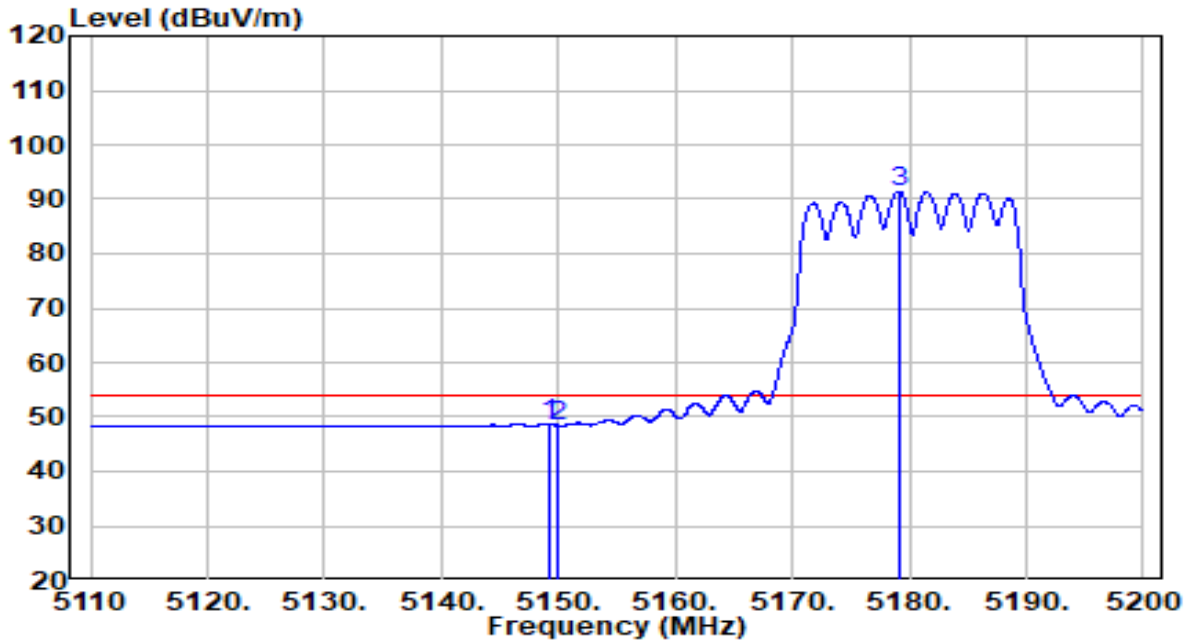


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5149.150	44.50	4.19	48.69	-5.31	54.00	Average
2	5150.000	44.25	4.20	48.45	-5.55	54.00	Average
3	* 5179.075	87.18	4.24	91.43	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5190MHz by 802.11ac-VHT40	Test Voltage	120V/60Hz

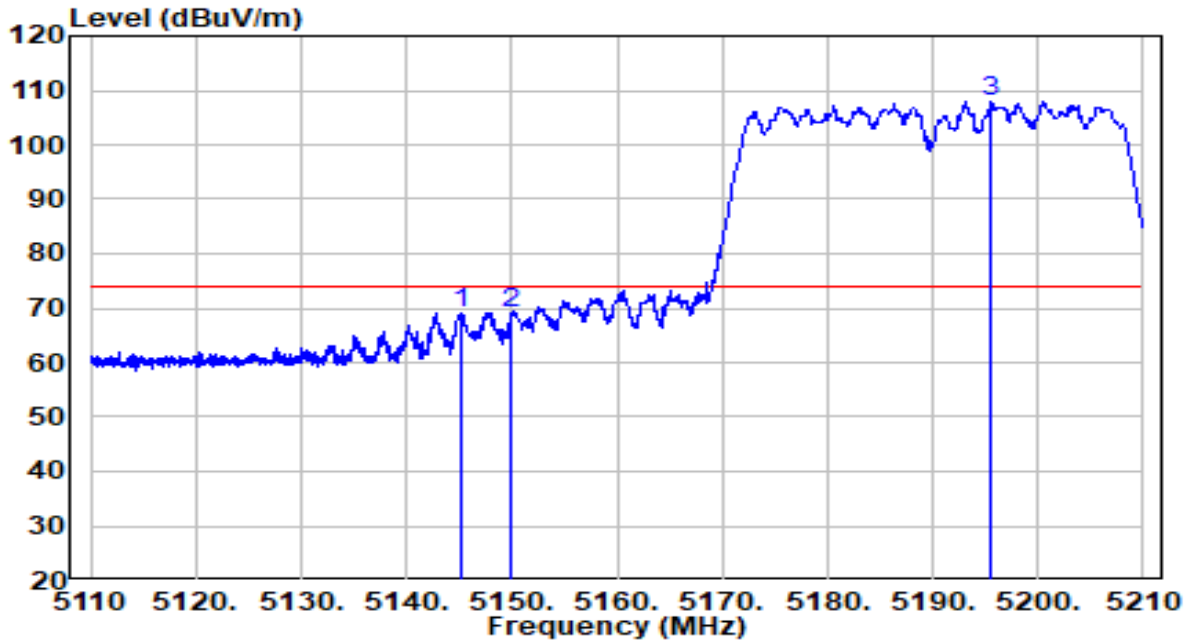


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5145.100	64.98	4.19	69.17	-4.83	74.00	Peak
2	5150.000	64.98	4.20	69.18	-4.82	74.00	Peak
3	* 5195.500	103.56	4.27	107.83	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5190MHz by 802.11ac-VHT40	Test Voltage	120V/60Hz

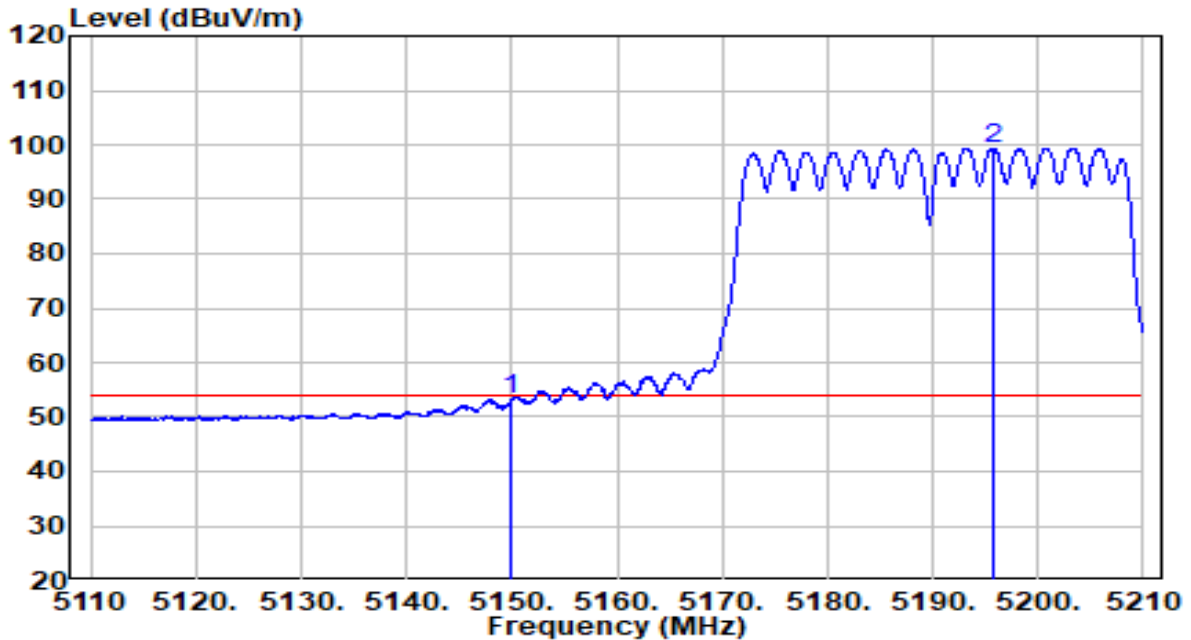


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	48.91	4.20	53.11	-0.89	54.00	Average
2	* 5195.750	95.14	4.27	99.41	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5190MHz by 802.11ac-VHT40	Test Voltage	120V/60Hz

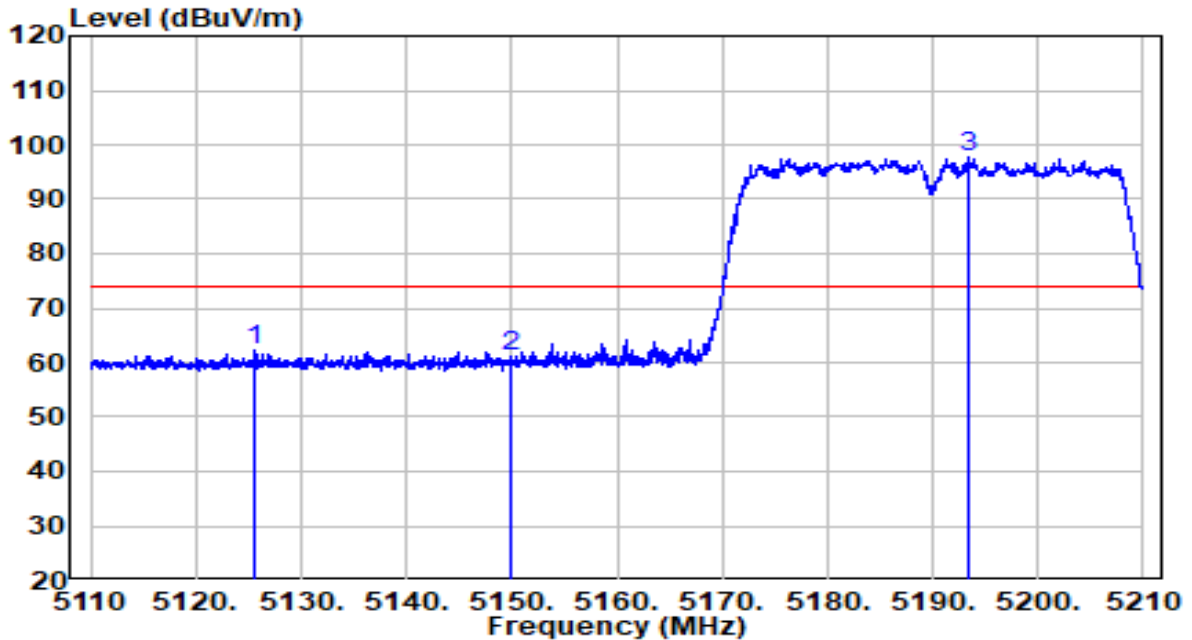


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5125.550	57.95	4.16	62.10	-11.90	74.00	Peak
2	5150.000	56.88	4.20	61.08	-12.92	74.00	Peak
3	* 5193.500	93.35	4.27	97.62	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5190MHz by 802.11ac-VHT40	Test Voltage	120V/60Hz

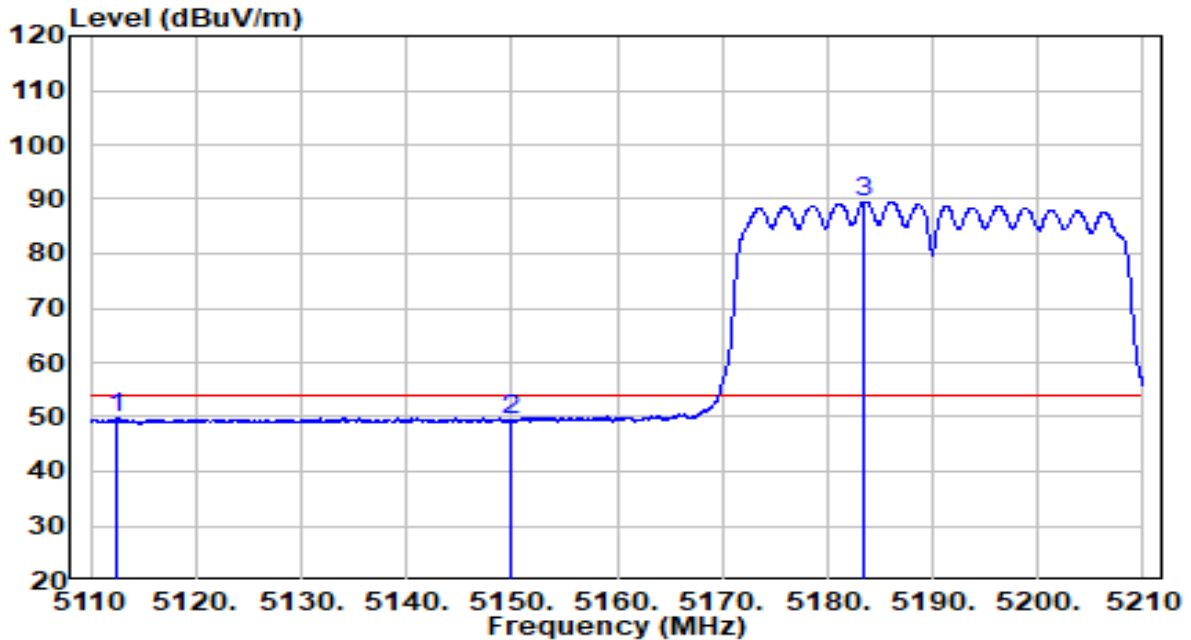


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5112.550	45.74	4.13	49.88	-4.12	54.00	Average
2	5150.000	45.31	4.20	49.51	-4.49	54.00	Average
3	* 5183.550	85.36	4.25	89.62	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5210MHz by 802.11ac-VHT80	Test Voltage	120V/60Hz

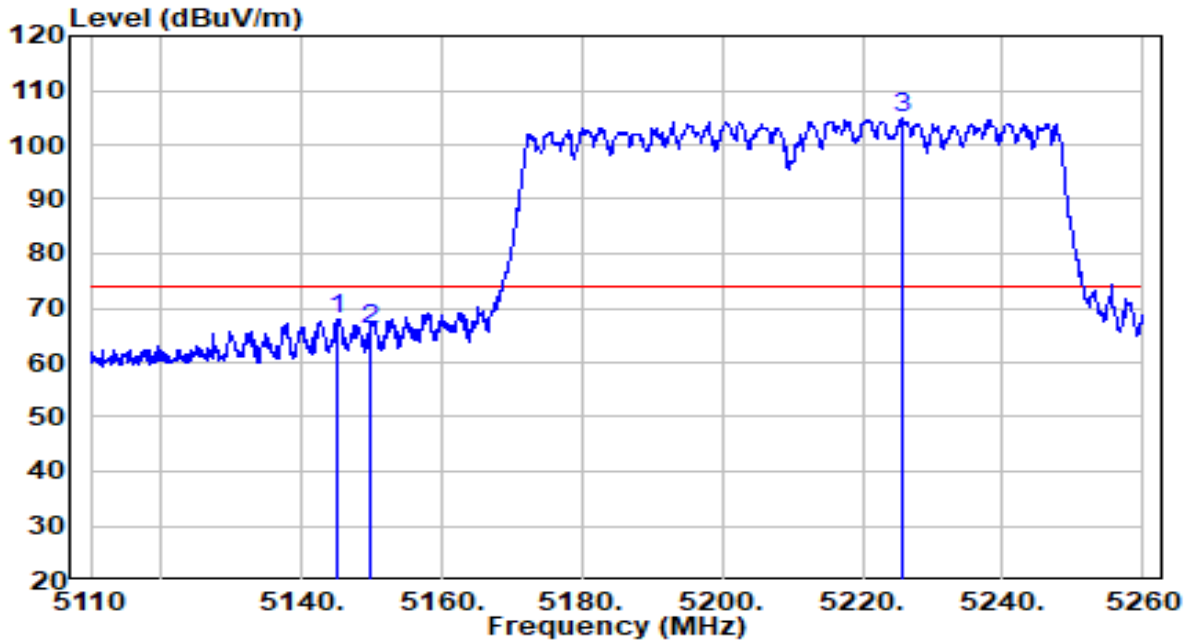


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5145.175	63.71	4.19	67.90	-6.10	74.00	Peak
2	5149.975	61.77	4.20	65.97	-8.03	74.00	Peak
3	* 5225.575	100.48	4.32	104.80	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5210MHz by 802.11ac-VHT80	Test Voltage	120V/60Hz

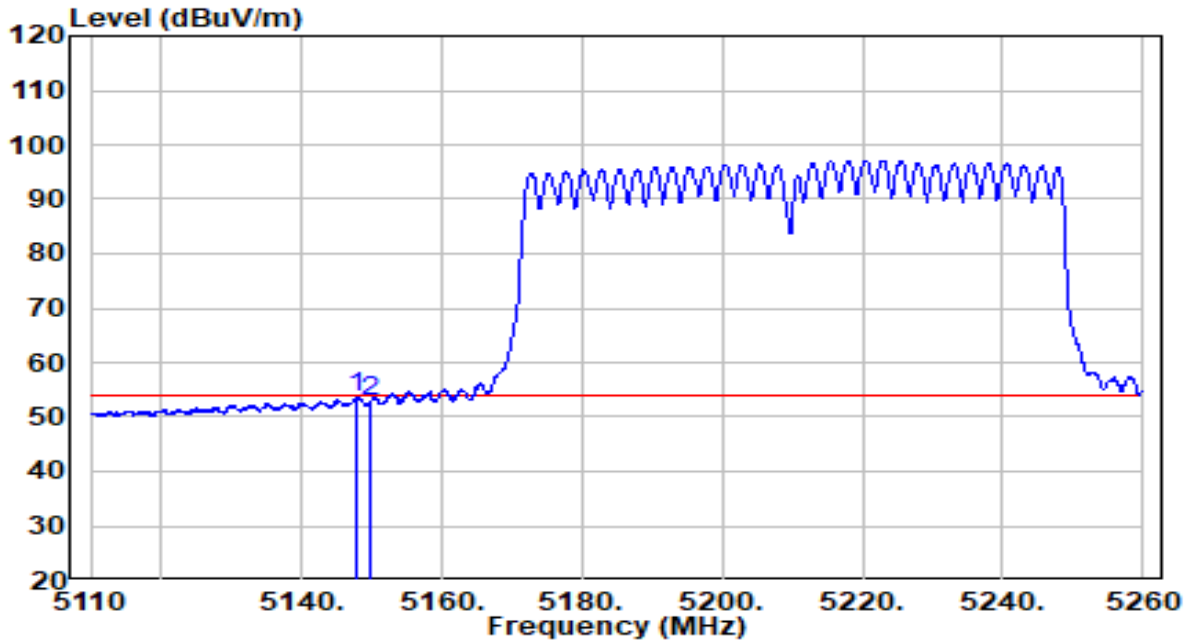


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5147.725	49.34	4.19	53.53	-0.47	54.00	Average
2	5149.975	48.70	4.20	52.90	-1.10	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5210MHz by 802.11ac-VHT80	Test Voltage	120V/60Hz

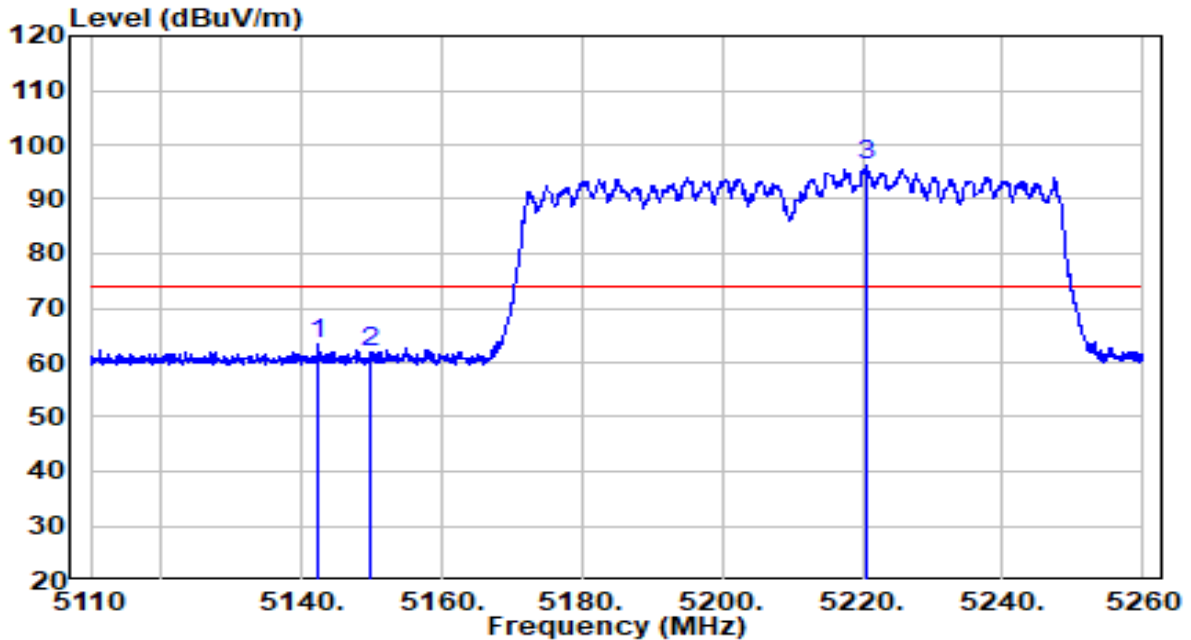


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5142.550	59.12	4.18	63.30	-10.70	74.00	Peak
2	5150.000	57.58	4.20	61.78	-12.22	74.00	Peak
3	* 5220.625	91.81	4.31	96.12	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5210MHz by 802.11ac-VHT80	Test Voltage	120V/60Hz

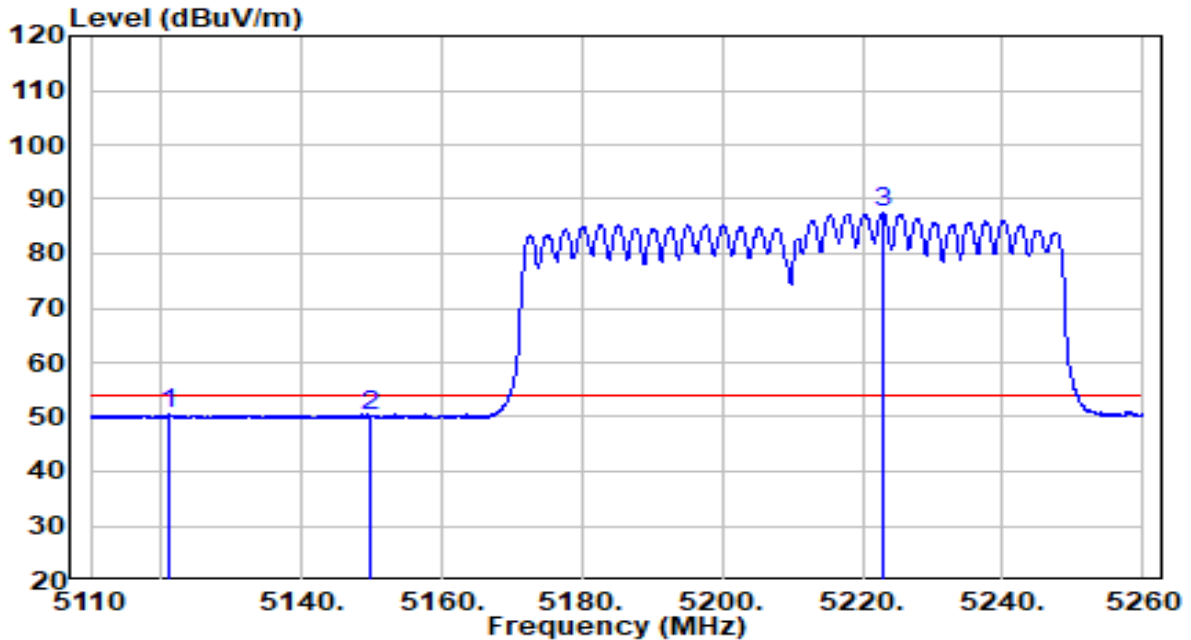


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5121.100	46.23	4.15	50.38	-3.62	54.00	Average
2	5149.975	45.82	4.20	50.02	-3.98	54.00	Average
3	* 5222.800	83.08	4.32	87.39	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5250MHz by 802.11ac-VHT160	Test Voltage	120V/60Hz

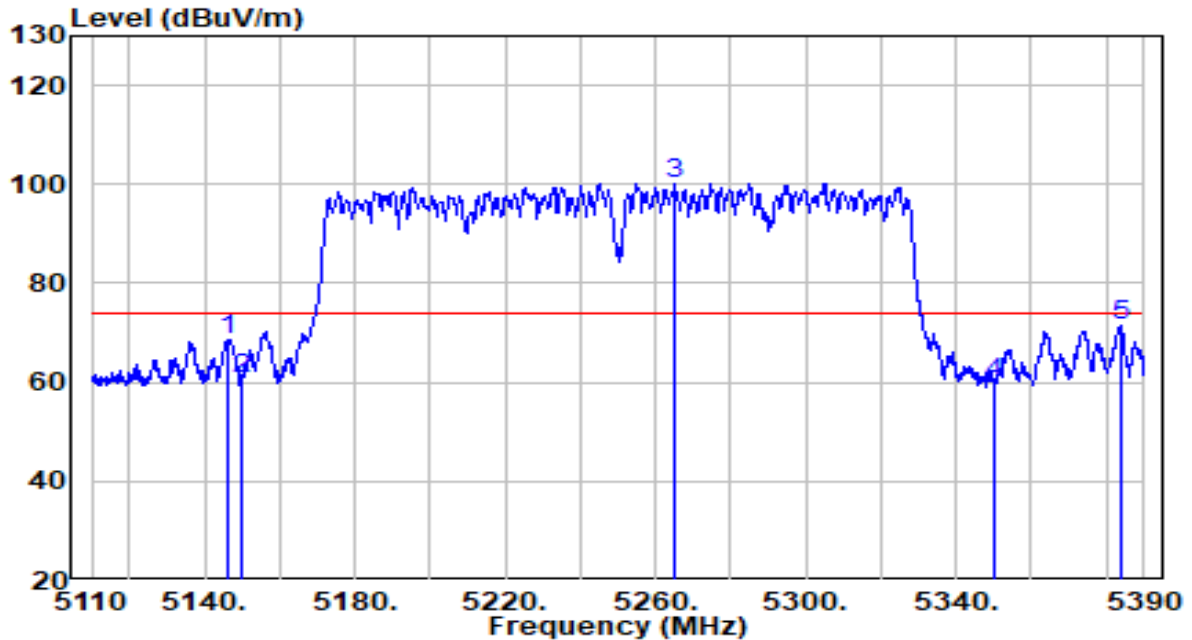


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5146.400	64.58	4.19	68.77	-5.23	74.00	Peak
2	5150.000	56.55	4.20	60.75	-13.25	74.00	Peak
3	* 5264.980	95.81	4.38	100.19	N/A	N/A	Peak
4	5350.000	55.44	4.52	59.97	-14.03	74.00	Peak
5	5383.560	66.77	4.58	71.35	-2.65	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5250MHz by 802.11ac-VHT160	Test Voltage	120V/60Hz

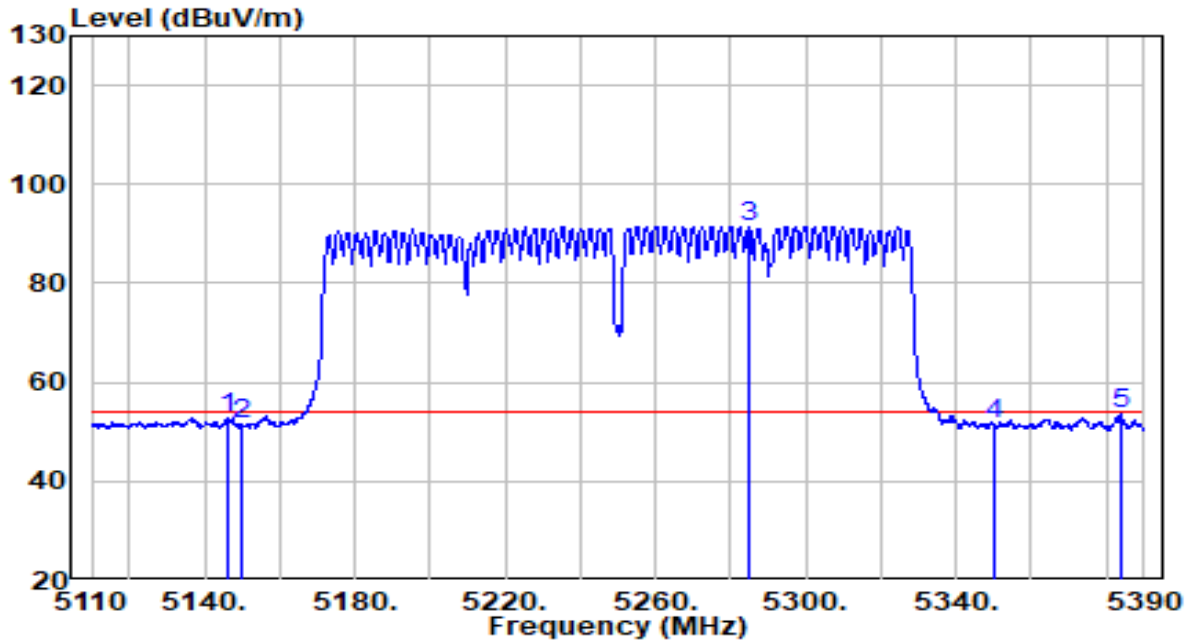


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5146.120	48.67	4.19	52.86	-1.14	54.00	Average
2	5150.000	47.16	4.20	51.36	-2.64	54.00	Average
3	* 5284.860	87.12	4.42	91.53	N/A	N/A	Average
4	5350.000	46.83	4.52	51.36	-2.64	54.00	Average
5	5383.840	48.91	4.58	53.49	-0.51	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5250MHz by 802.11ac-VHT160	Test Voltage	120V/60Hz

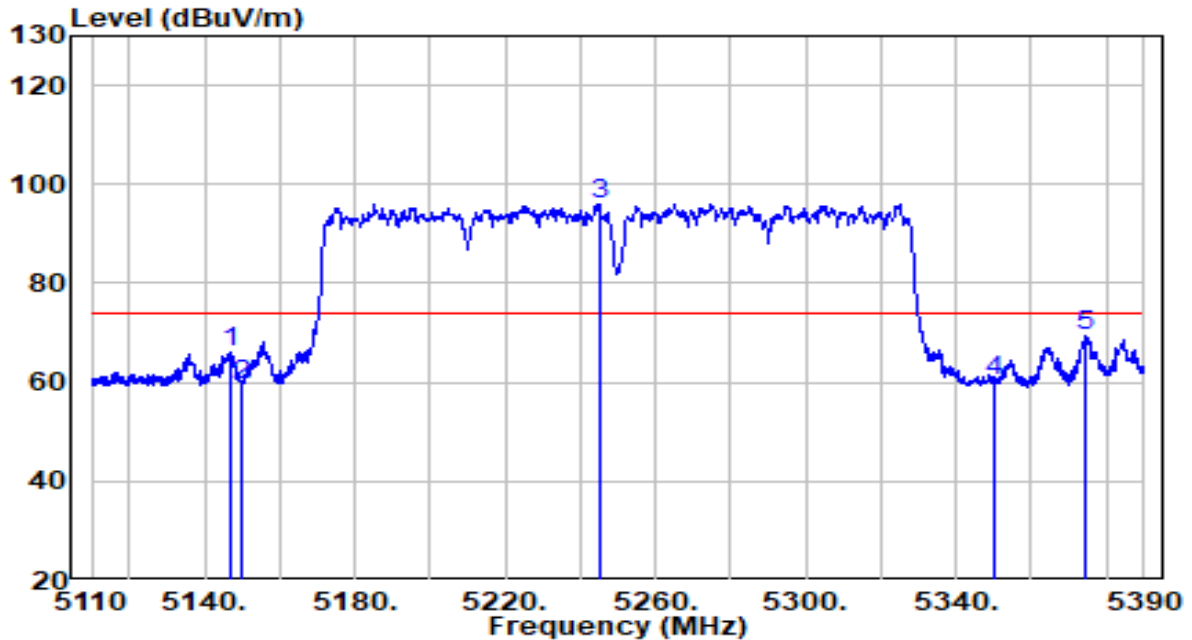


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5147.240	61.95	4.19	66.14	-7.86	74.00	Peak
2	5150.000	55.29	4.20	59.49	-14.51	74.00	Peak
3	* 5244.960	91.72	4.35	96.07	N/A	N/A	Peak
4	5350.000	55.72	4.52	60.24	-13.76	74.00	Peak
5	5374.320	64.72	4.56	69.28	-4.72	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5250MHz by 802.11ac-VHT160	Test Voltage	120V/60Hz

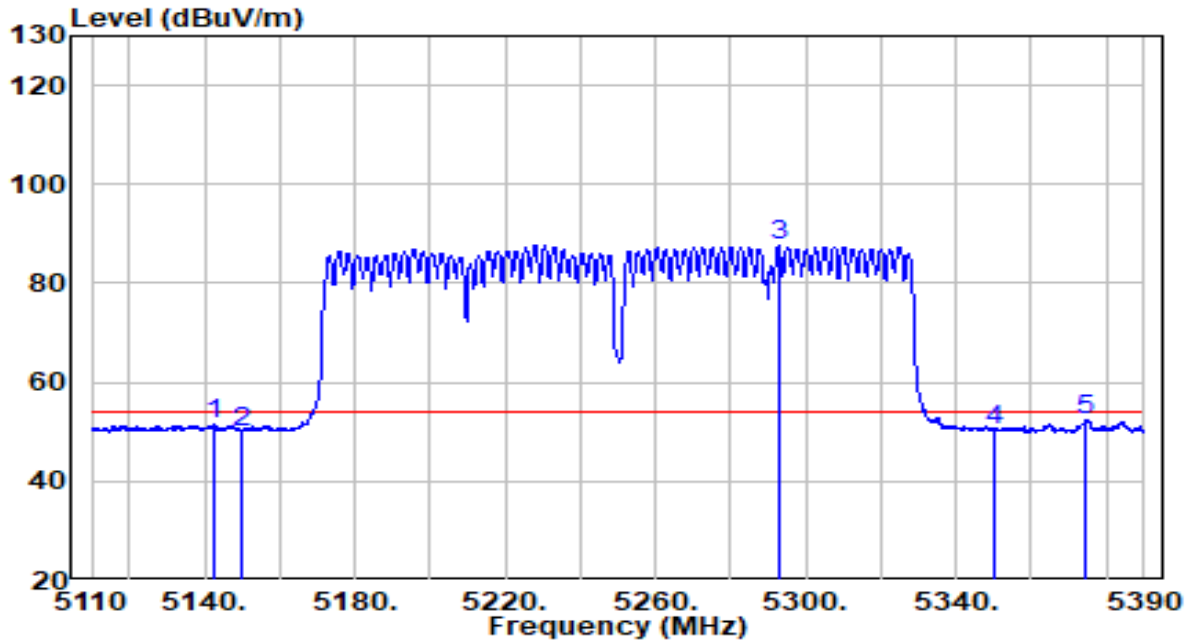


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5142.480	47.20	4.18	51.38	-2.62	54.00	Average
2	5150.000	45.88	4.20	50.08	-3.92	54.00	Average
3	* 5292.840	83.21	4.43	87.64	N/A	N/A	Average
4	5350.000	45.85	4.52	50.37	-3.63	54.00	Average
5	5374.460	47.79	4.56	52.36	-1.64	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

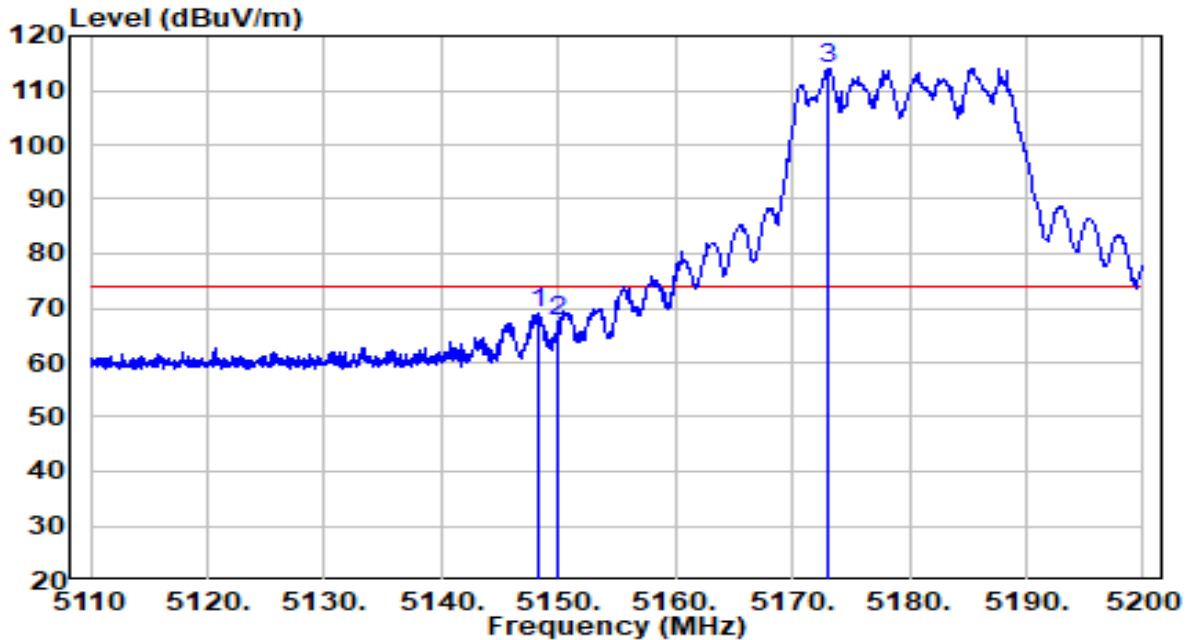


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5148.340	64.84	4.19	69.03	-4.97	74.00	Peak
2	5150.000	63.27	4.20	67.46	-6.54	74.00	Peak
3	* 5173.090	109.78	4.23	114.01	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

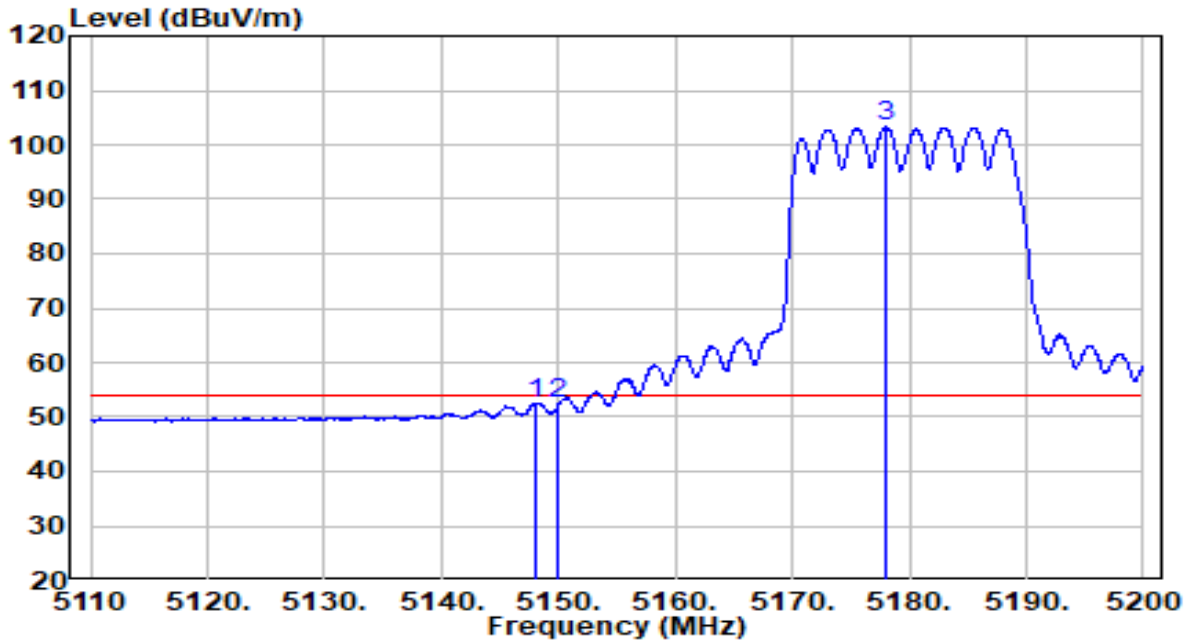


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5147.980	48.33	4.19	52.52	-1.48	54.00	Average
2	5150.000	48.08	4.20	52.28	-1.72	54.00	Average
3	* 5178.040	99.03	4.24	103.27	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

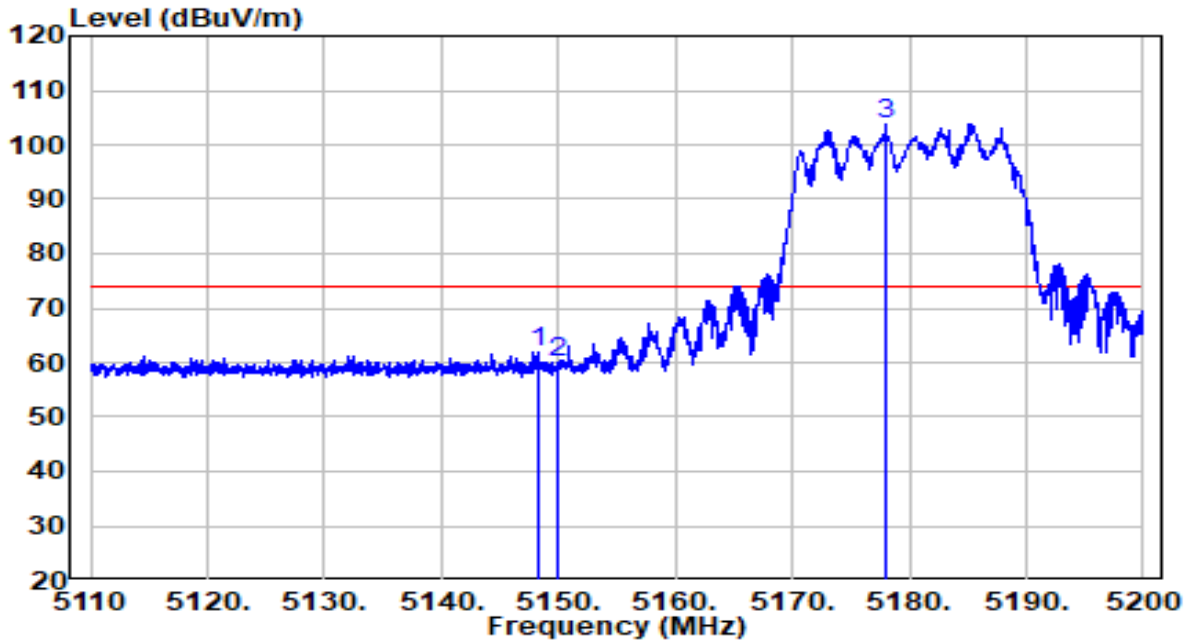


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5148.250	57.82	4.19	62.01	-11.99	74.00	Peak
2	5150.000	55.75	4.20	59.94	-14.06	74.00	Peak
3	* 5177.950	99.72	4.24	103.96	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

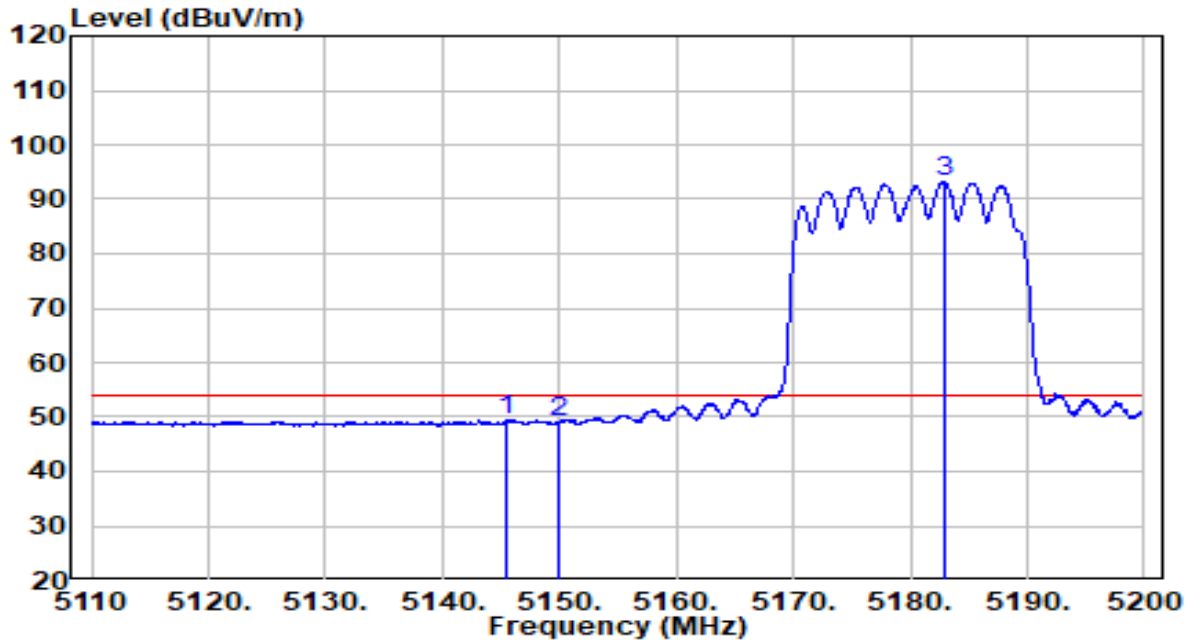


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5145.550	45.21	4.19	49.40	-4.60	54.00	Average
2	5150.000	44.91	4.20	49.10	-4.90	54.00	Average
3	* 5182.855	88.95	4.25	93.20	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5190MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

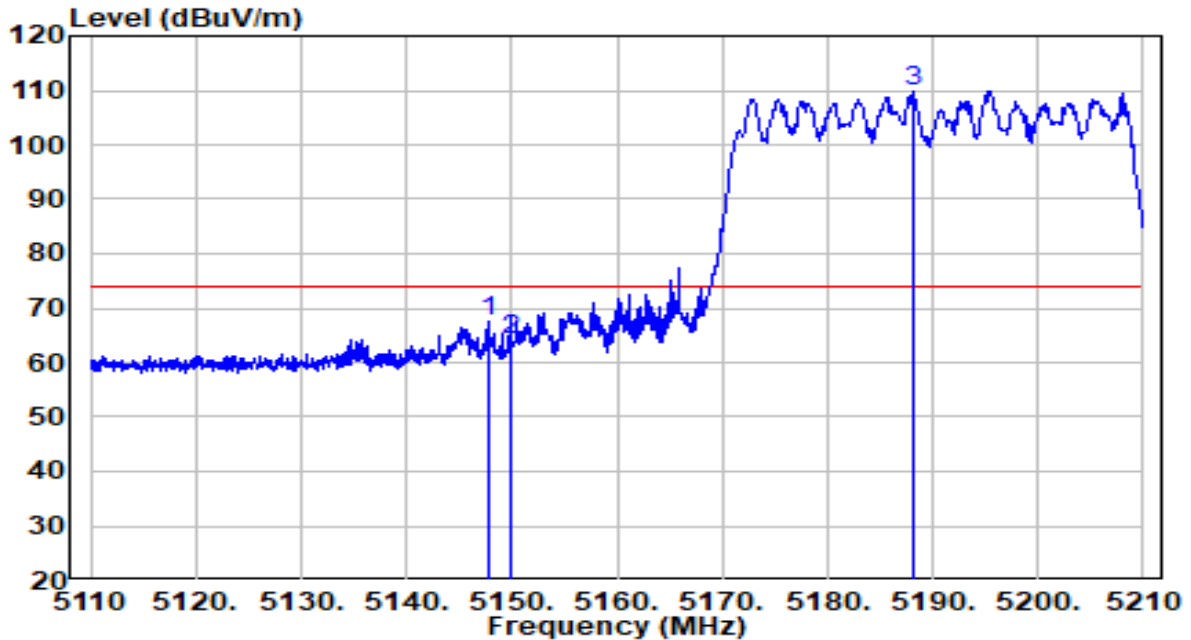


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.700	63.50	4.19	67.69	-6.31	74.00	Peak
2	5150.000	59.94	4.20	64.13	-9.87	74.00	Peak
3	* 5188.050	105.72	4.26	109.98	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5190MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

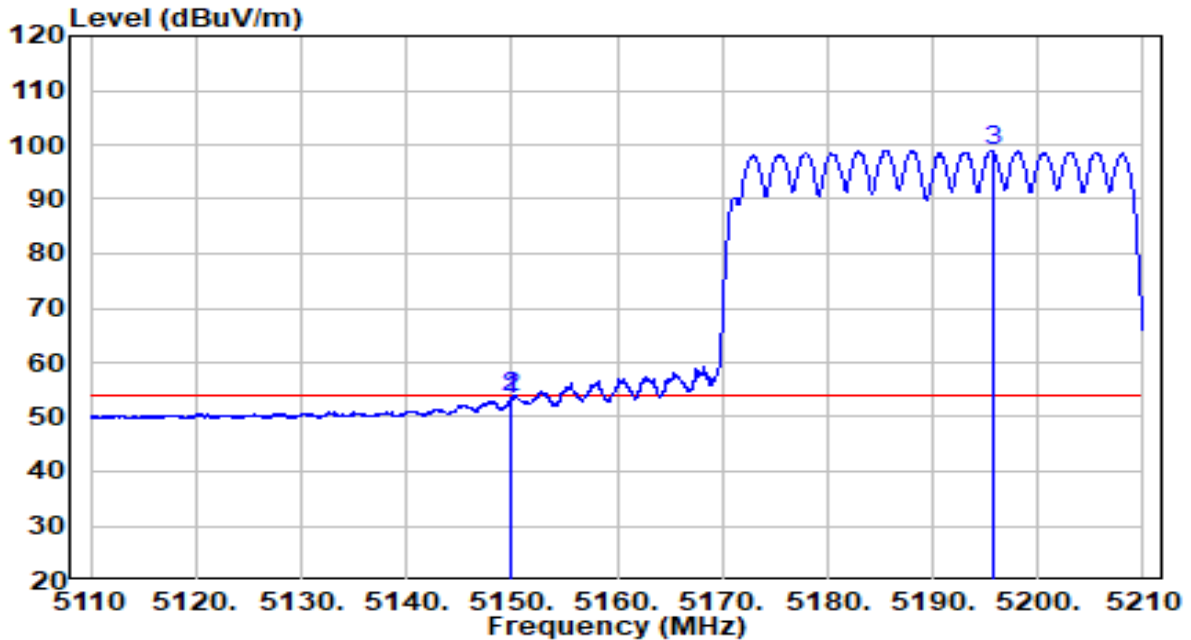


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.800	48.94	4.20	53.14	-0.86	54.00	Average
2	5150.000	49.30	4.20	53.50	-0.50	54.00	Average
3	* 5195.650	94.78	4.27	99.05	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5190MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

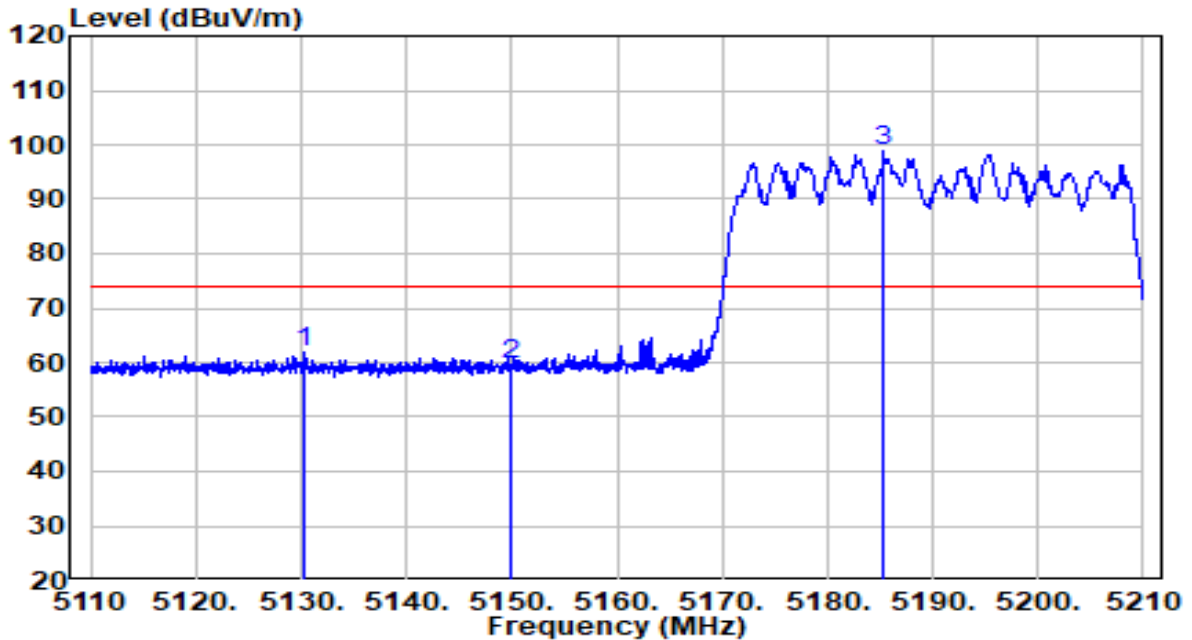


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5130.300	57.63	4.16	61.79	-12.21	74.00	Peak
2	5150.000	55.46	4.20	59.65	-14.35	74.00	Peak
3	* 5185.350	94.59	4.25	98.84	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5190MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

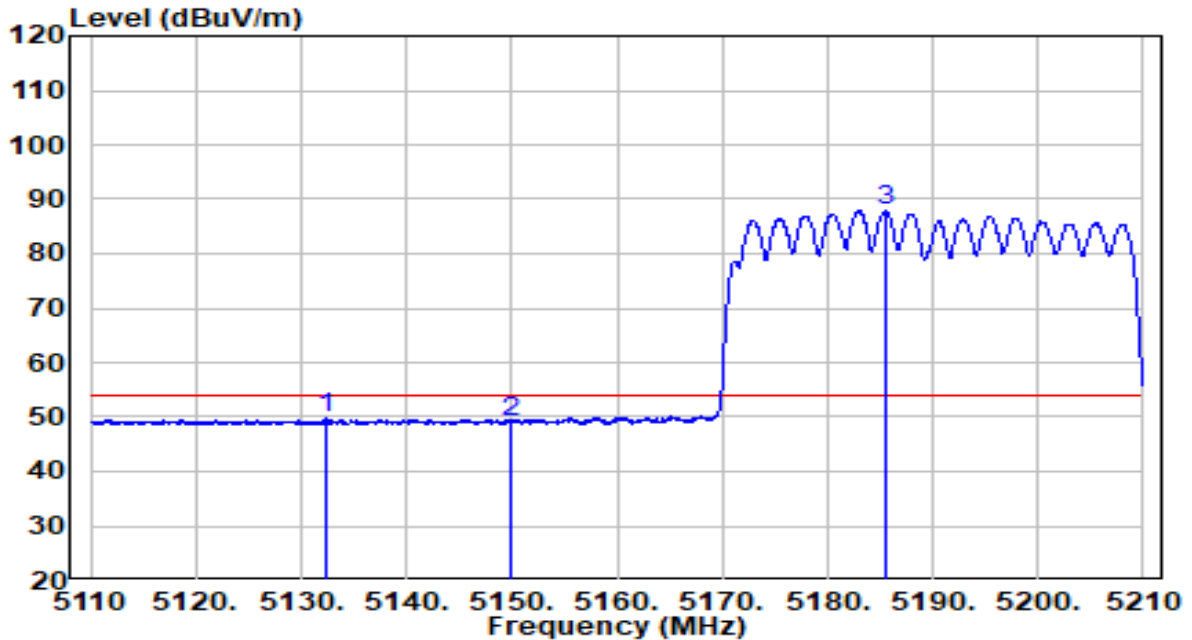


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5132.400	45.53	4.17	49.70	-4.30	54.00	Average
2	5150.000	44.90	4.20	49.10	-4.90	54.00	Average
3	* 5185.600	83.59	4.25	87.85	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5210MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

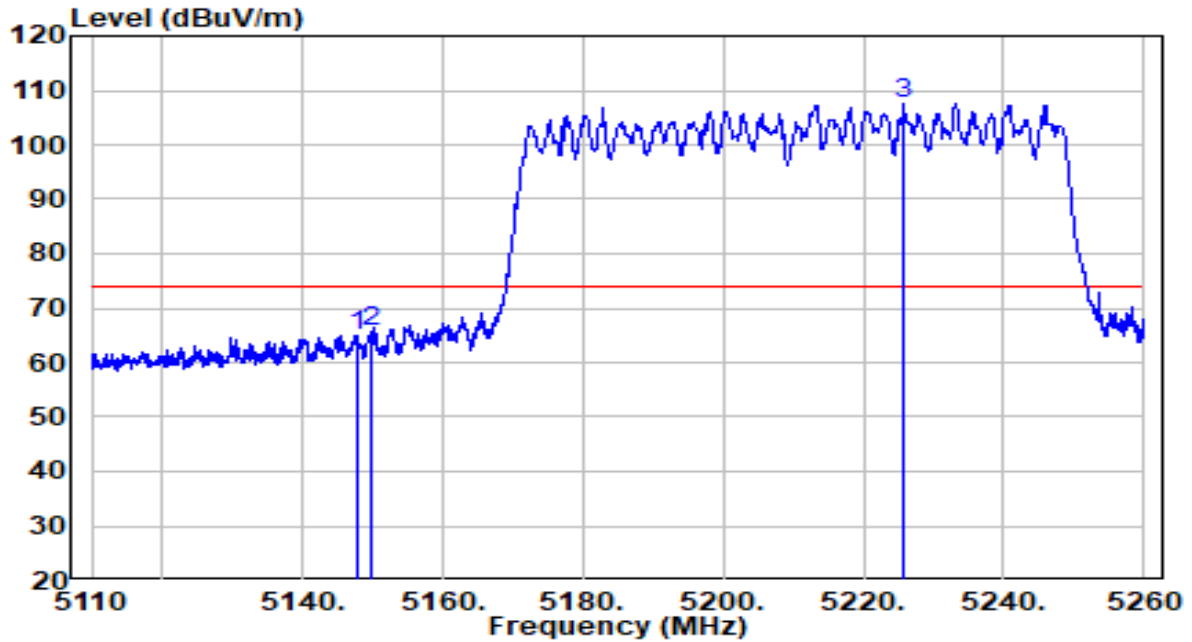


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.950	60.88	4.19	65.07	-8.93	74.00	Peak
2	5150.000	61.29	4.20	65.49	-8.51	74.00	Peak
3	* 5225.575	103.21	4.32	107.53	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5210MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

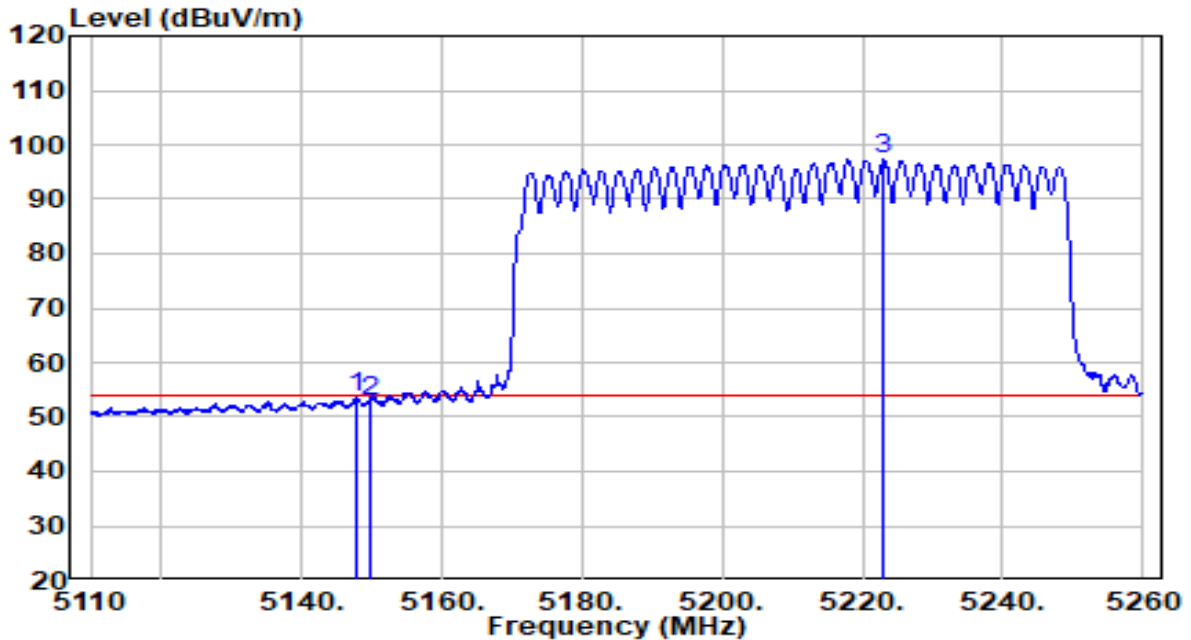


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.875	49.24	4.19	53.43	-0.57	54.00	Average
2	5150.000	48.82	4.20	53.01	-0.99	54.00	Average
3	* 5223.025	92.90	4.32	97.22	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5210MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

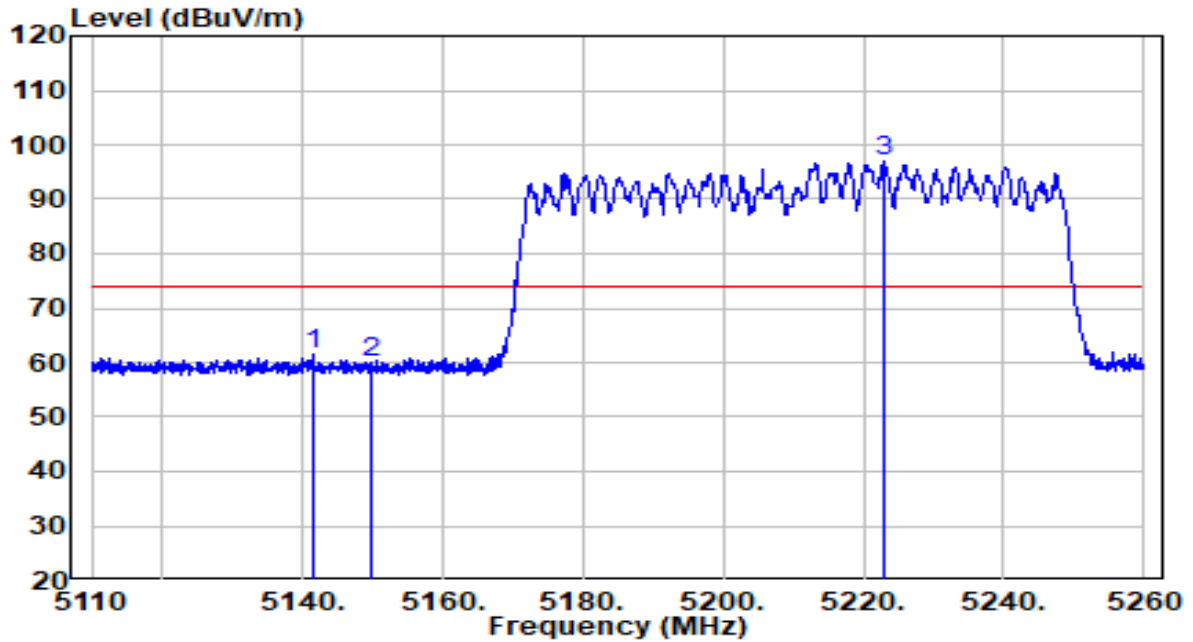


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5141.425	57.20	4.18	61.39	-12.61	74.00	Peak
2	5149.975	55.69	4.20	59.89	-14.11	74.00	Peak
3	* 5223.100	92.51	4.32	96.82	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5210MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

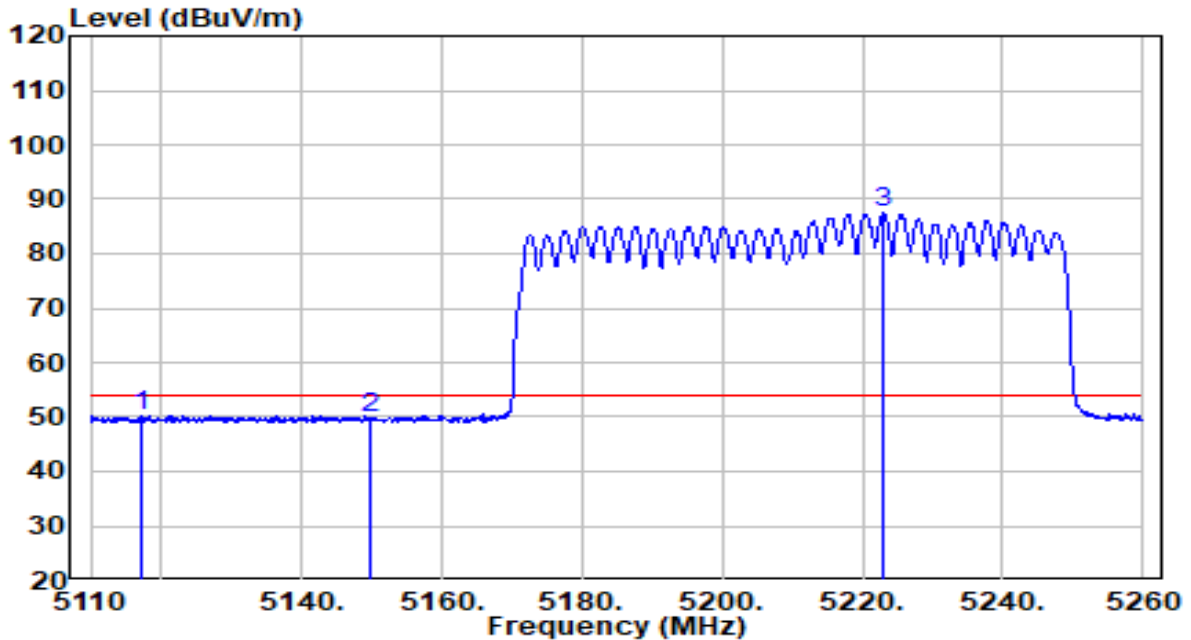


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5117.200	46.14	4.14	50.29	-3.71	54.00	Average
2	5149.975	45.49	4.20	49.68	-4.32	54.00	Average
3	* 5222.950	83.08	4.32	87.40	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5250MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

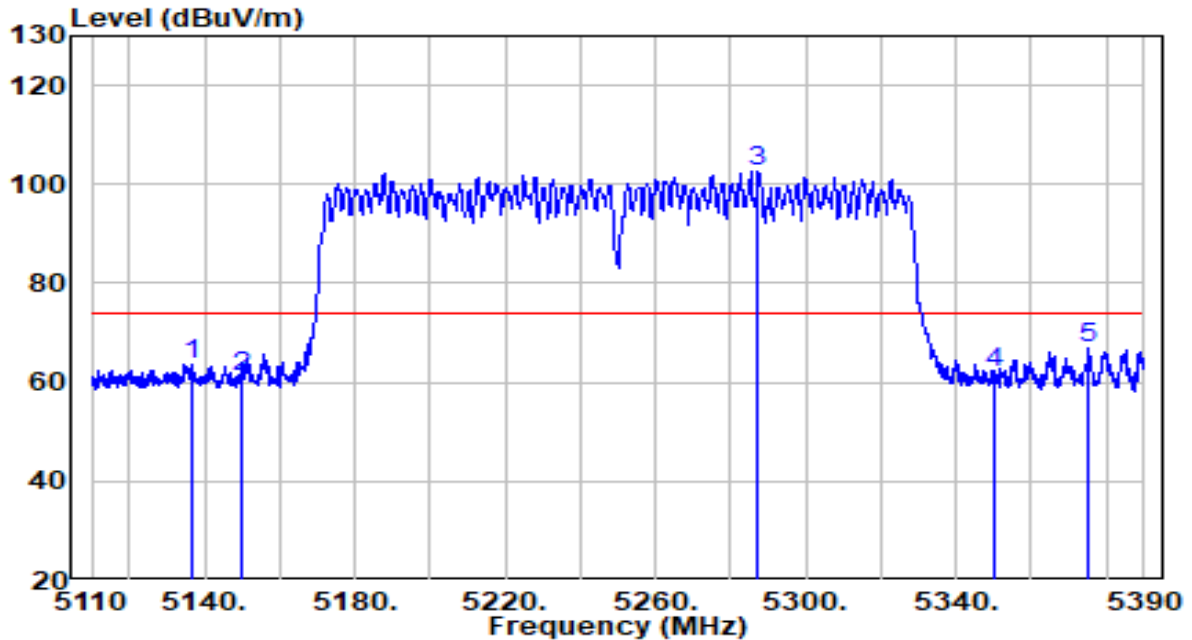


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5136.460	59.38	4.17	63.55	-10.45	74.00	Peak
2	5150.000	56.93	4.20	61.13	-12.87	74.00	Peak
3	* 5287.380	98.26	4.42	102.68	N/A	N/A	Peak
4	5349.960	57.29	4.52	61.81	-12.19	74.00	Peak
5	5375.300	62.13	4.57	66.70	-7.30	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5250MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

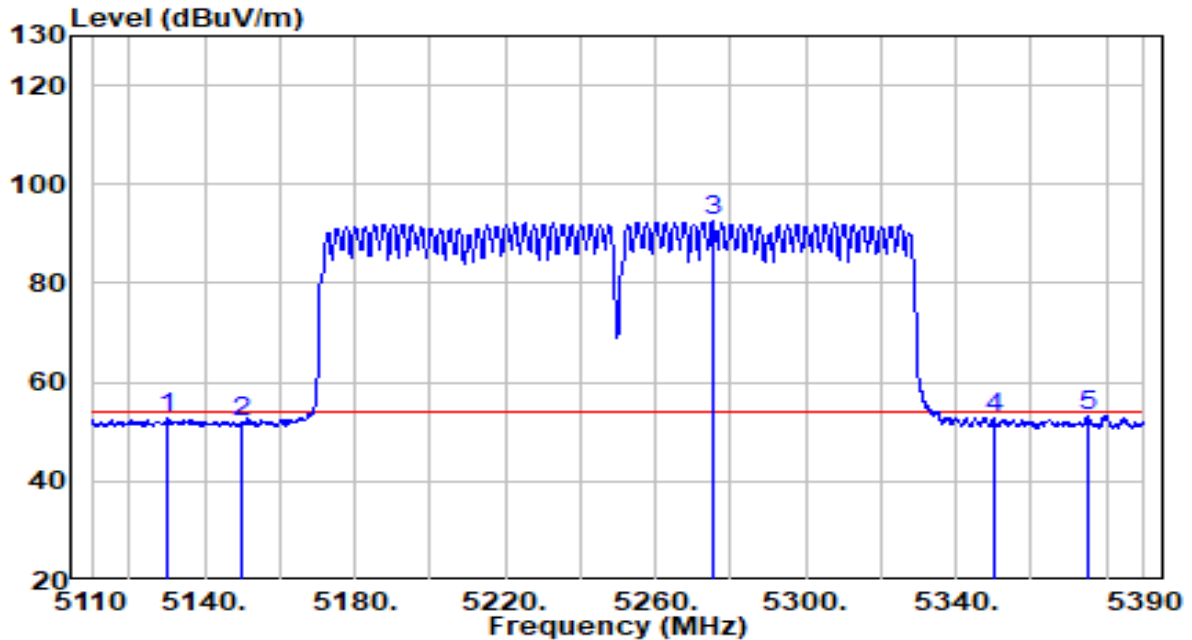


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5129.880	48.70	4.16	52.86	-1.14	54.00	Average
2	5150.000	47.63	4.20	51.83	-2.17	54.00	Average
3	* 5275.200	88.08	4.40	92.48	N/A	N/A	Average
4	5350.000	48.11	4.52	52.64	-1.36	54.00	Average
5	5374.880	48.72	4.56	53.28	-0.72	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5250MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

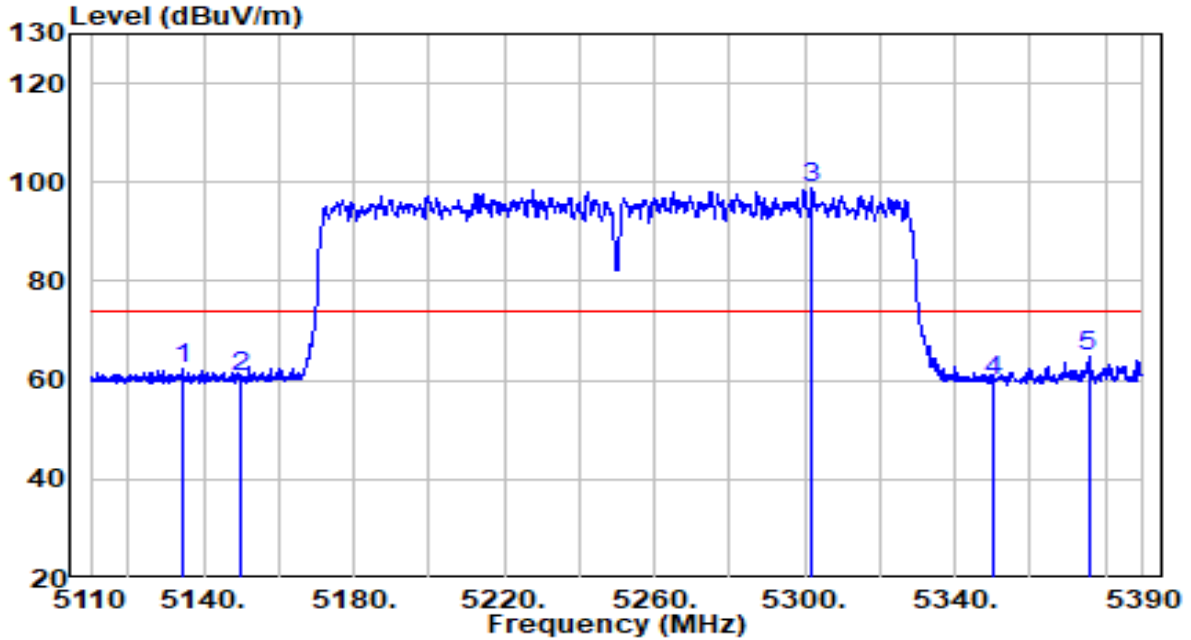


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5134.640	58.24	4.17	62.41	-11.59	74.00	Peak
2	5150.000	56.36	4.20	60.56	-13.44	74.00	Peak
3	* 5301.940	94.47	4.45	98.92	N/A	N/A	Peak
4	5350.000	55.22	4.52	59.75	-14.25	74.00	Peak
5	5375.440	60.38	4.57	64.95	-9.05	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-16
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.4°C /49.8%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5250MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

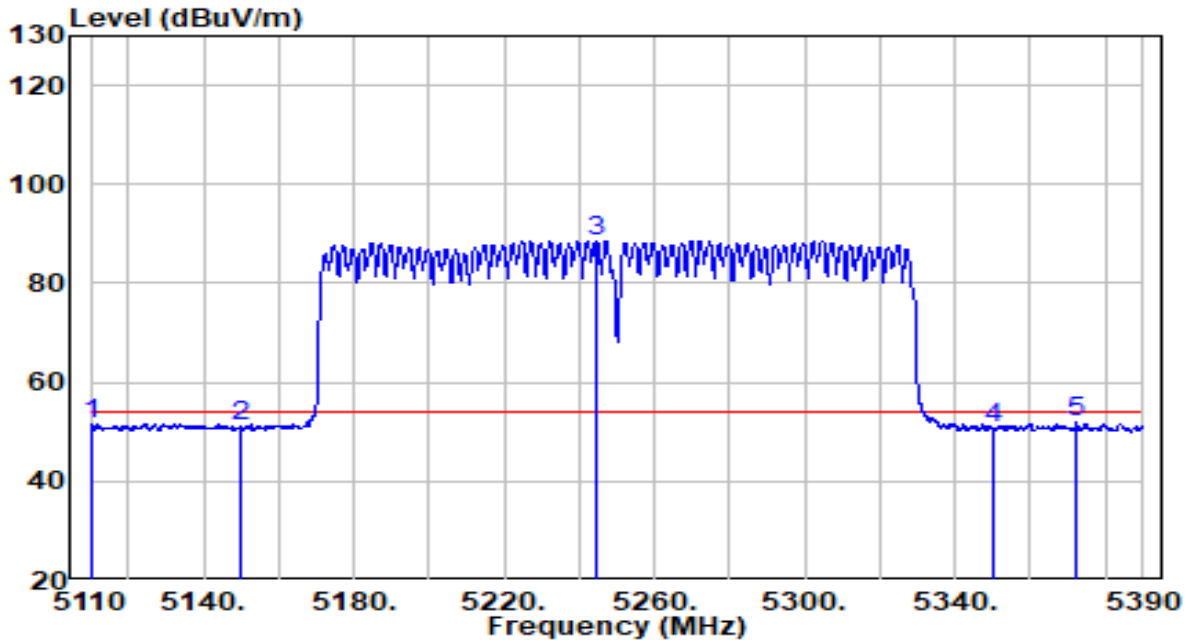


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5110.140	47.59	4.13	51.72	-2.28	54.00	Average
2	5150.000	46.73	4.20	50.93	-3.07	54.00	Average
3	* 5244.540	84.30	4.35	88.65	N/A	N/A	Average
4	5350.000	46.35	4.52	50.87	-3.13	54.00	Average
5	5372.220	47.26	4.56	51.82	-2.18	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

Path A _ Full Path

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11a	Test Voltage	120V/60Hz

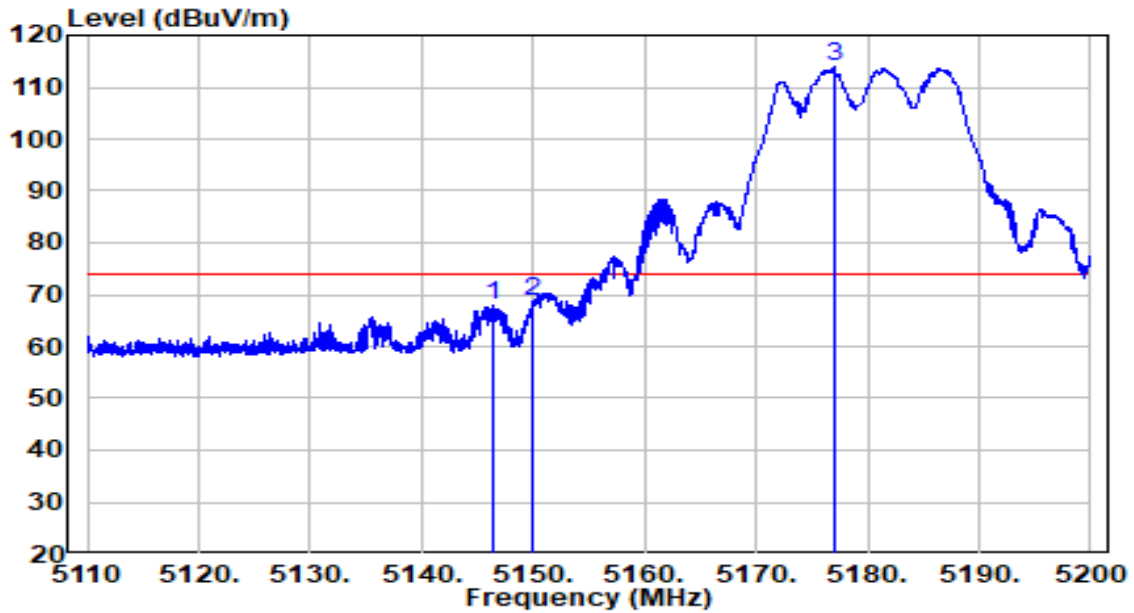


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5146.495	63.79	4.19	67.98	-6.02	74.00	Peak
2	5150.000	64.52	4.20	68.72	-5.28	74.00	Peak
3	* 5177.005	109.88	4.24	114.12	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11a	Test Voltage	120V/60Hz

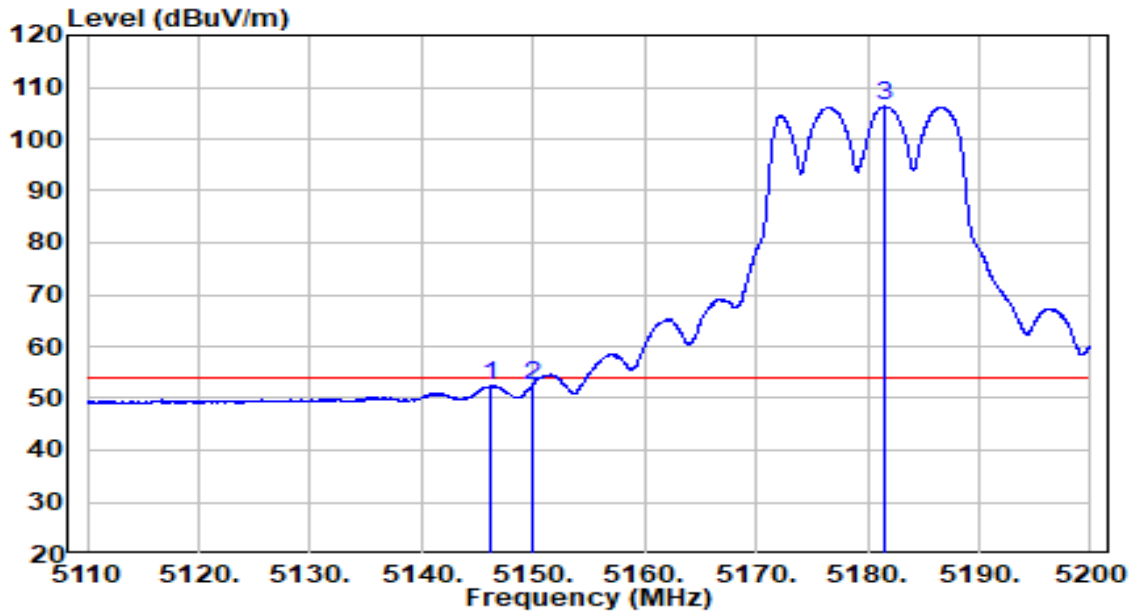


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5146.270	48.28	4.19	52.47	-1.53	54.00	Average
2	5150.000	48.44	4.20	52.64	-1.36	54.00	Average
3	* 5181.640	101.98	4.25	106.23	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11a	Test Voltage	120V/60Hz

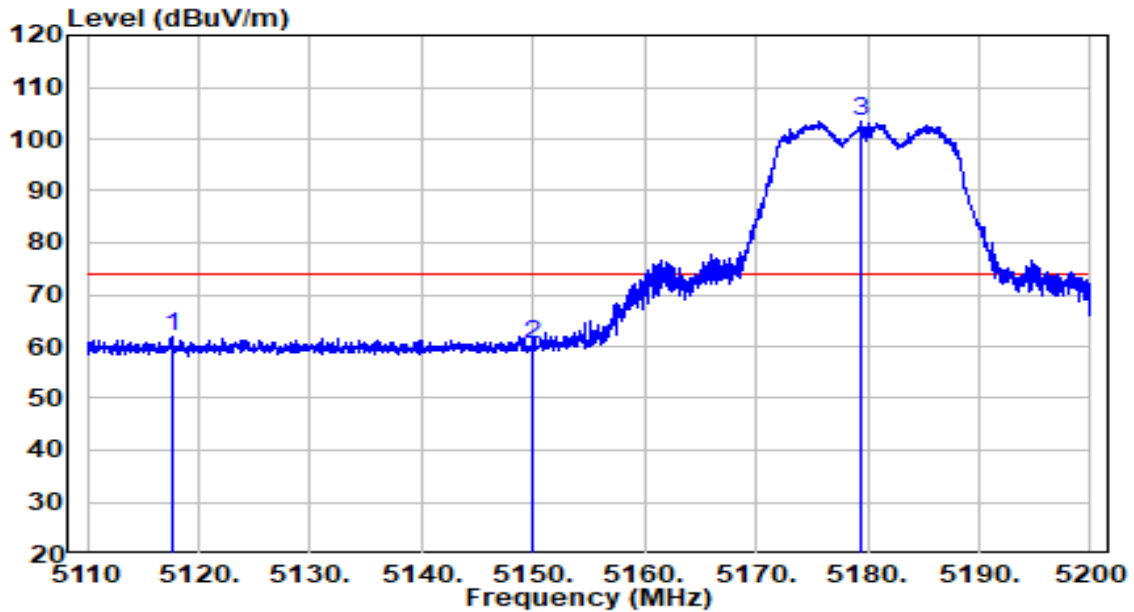


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5117.740	57.61	4.14	61.76	-12.24	74.00	Peak
2	5150.005	56.32	4.20	60.51	-13.49	74.00	Peak
3	* 5179.345	99.30	4.24	103.54	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11a	Test Voltage	120V/60Hz

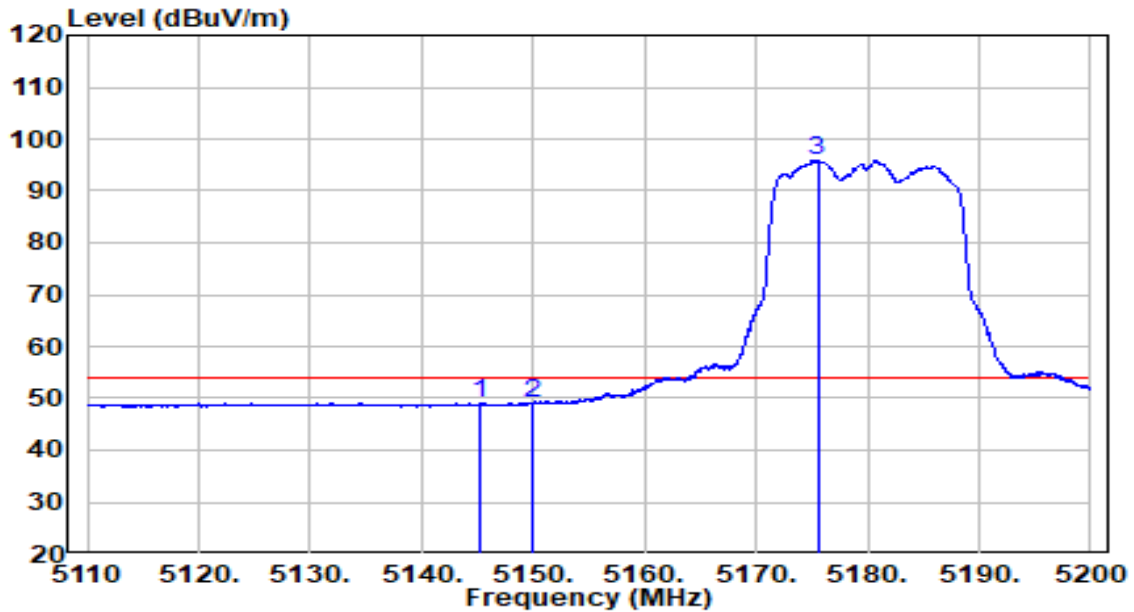


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5145.145	44.82	4.19	49.01	-4.99	54.00	Average
2	5150.005	44.80	4.20	49.00	-5.00	54.00	Average
3	* 5175.520	91.59	4.24	95.83	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11ac-VHT20	Test Voltage	120V/60Hz

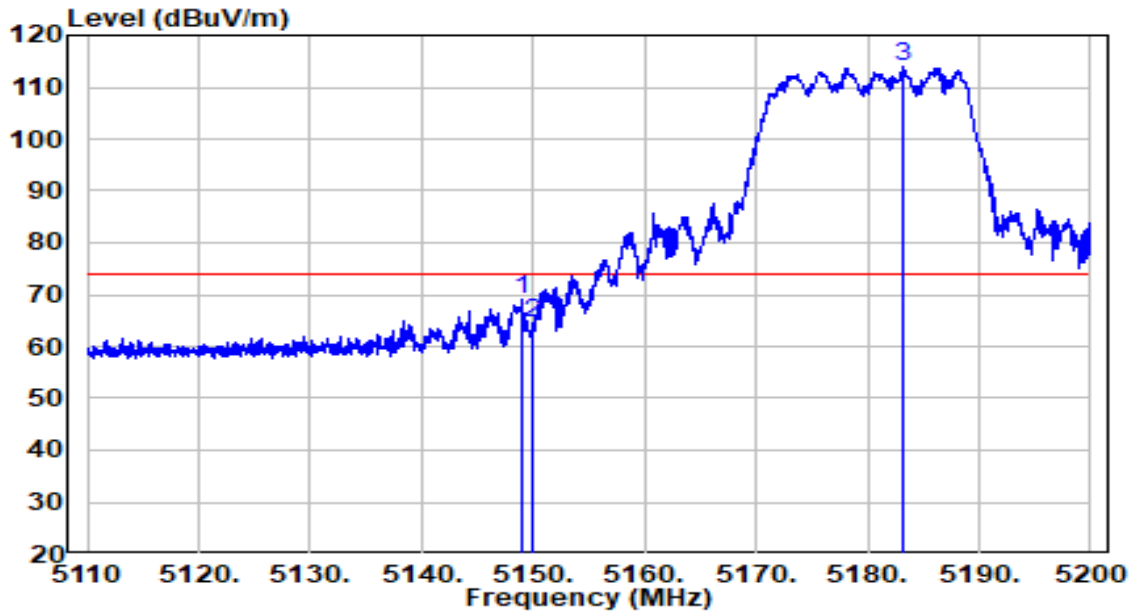


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.970	64.84	4.19	69.04	-4.96	74.00	Peak
2	5150.005	60.30	4.20	64.50	-9.50	74.00	Peak
3	* 5183.260	109.57	4.25	113.82	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11ac-VHT20	Test Voltage	120V/60Hz

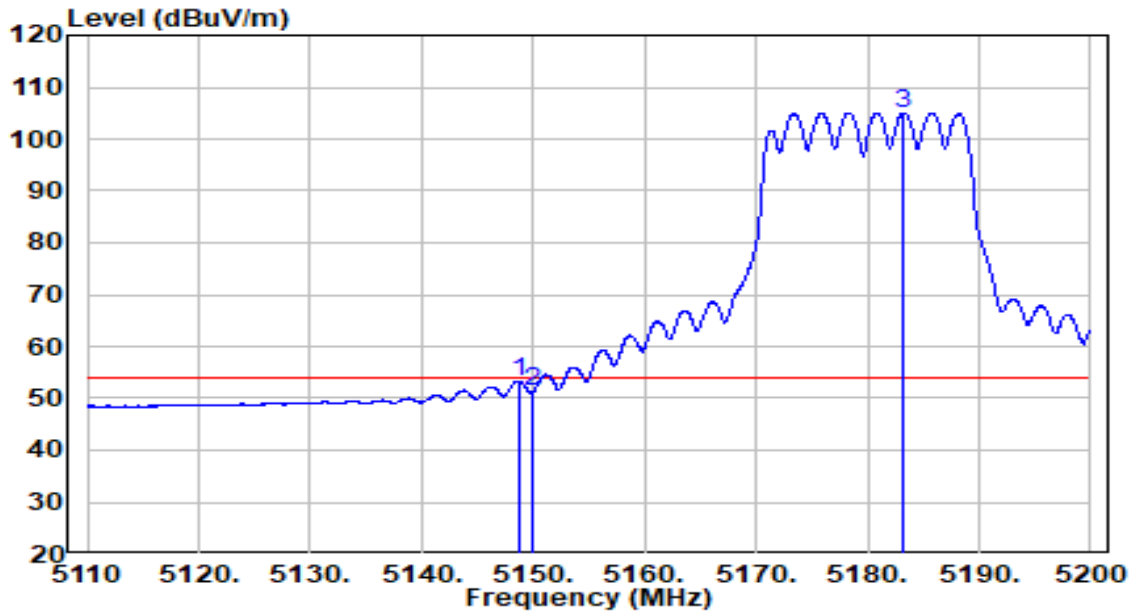


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5148.700	49.17	4.19	53.36	-0.64	54.00	Average
2	5150.000	47.07	4.20	51.26	-2.74	54.00	Average
3	* 5183.260	100.79	4.25	105.04	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11ac-VHT20	Test Voltage	120V/60Hz

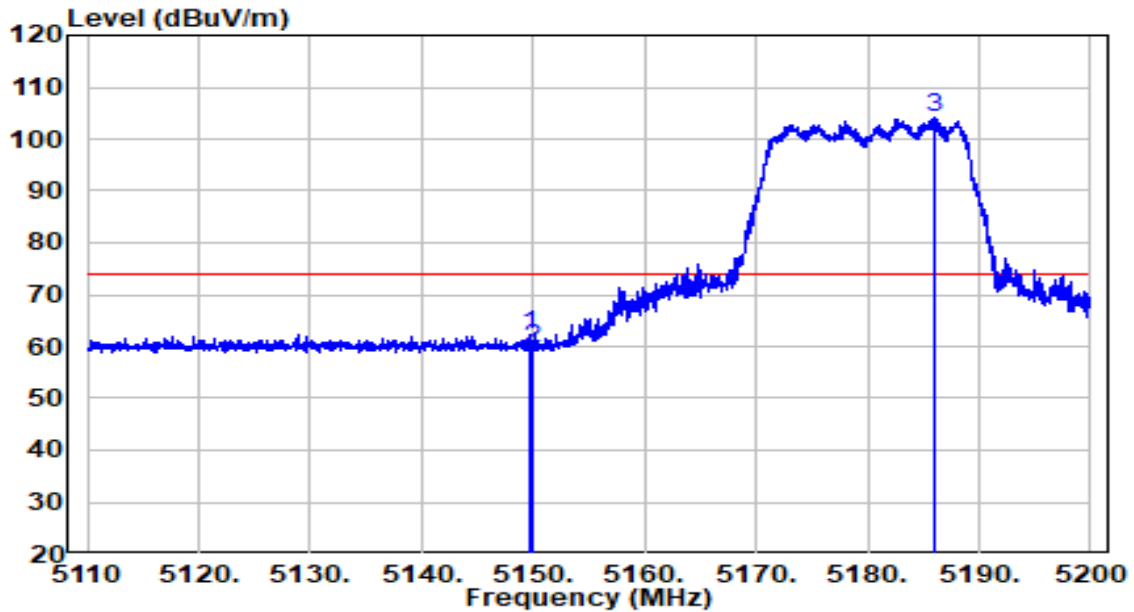


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5149.600	57.95	4.20	62.15	-11.85	74.00	Peak
2	5150.005	55.60	4.20	59.80	-14.20	74.00	Peak
3	* 5185.960	99.81	4.25	104.06	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11ac-VHT20	Test Voltage	120V/60Hz

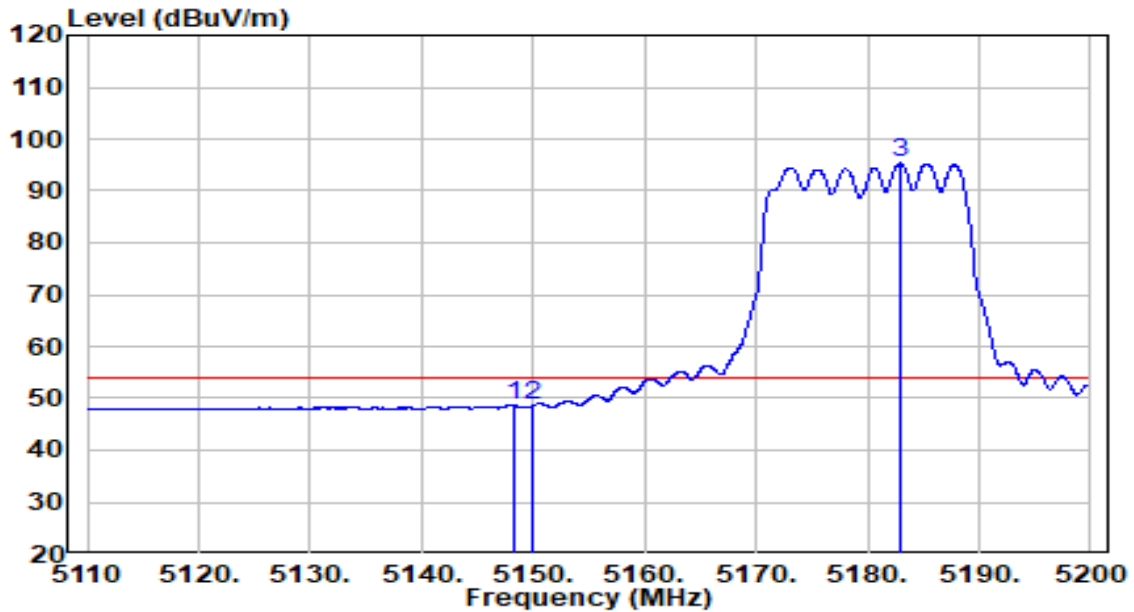


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.250	44.49	4.19	48.68	-5.32	54.00	Average
2	5150.005	44.49	4.20	48.69	-5.31	54.00	Average
3	* 5182.900	91.04	4.25	95.29	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5190MHz by 802.11ac-VHT40	Test Voltage	120V/60Hz

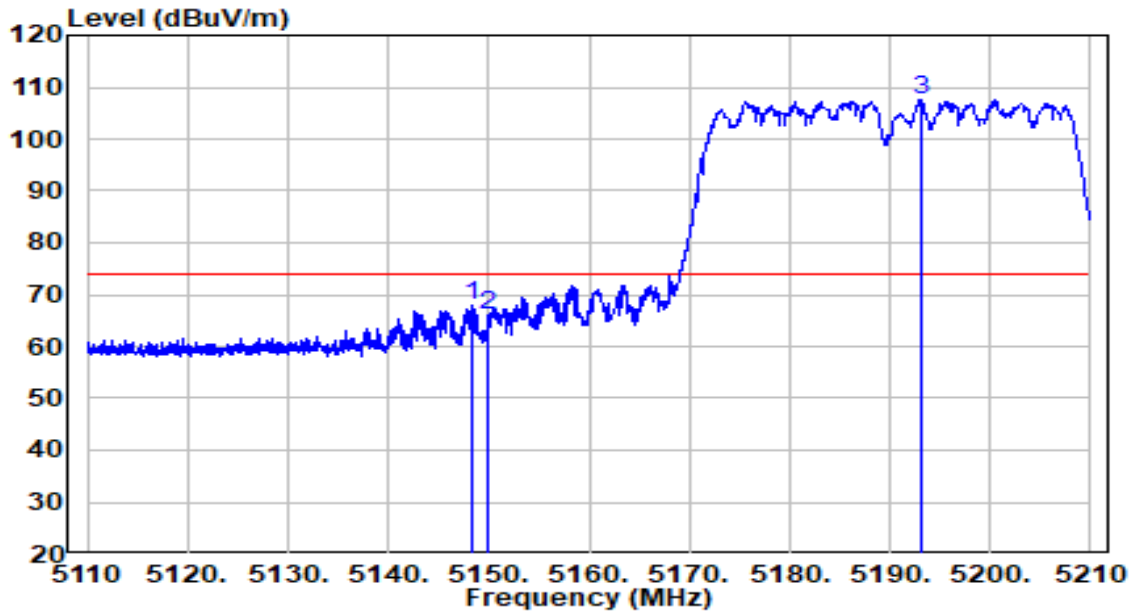


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.350	63.73	4.19	67.93	-6.07	74.00	Peak
2	5150.000	61.75	4.20	65.95	-8.05	74.00	Peak
3	* 5193.050	103.44	4.27	107.70	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5190MHz by 802.11ac-VHT40	Test Voltage	120V/60Hz

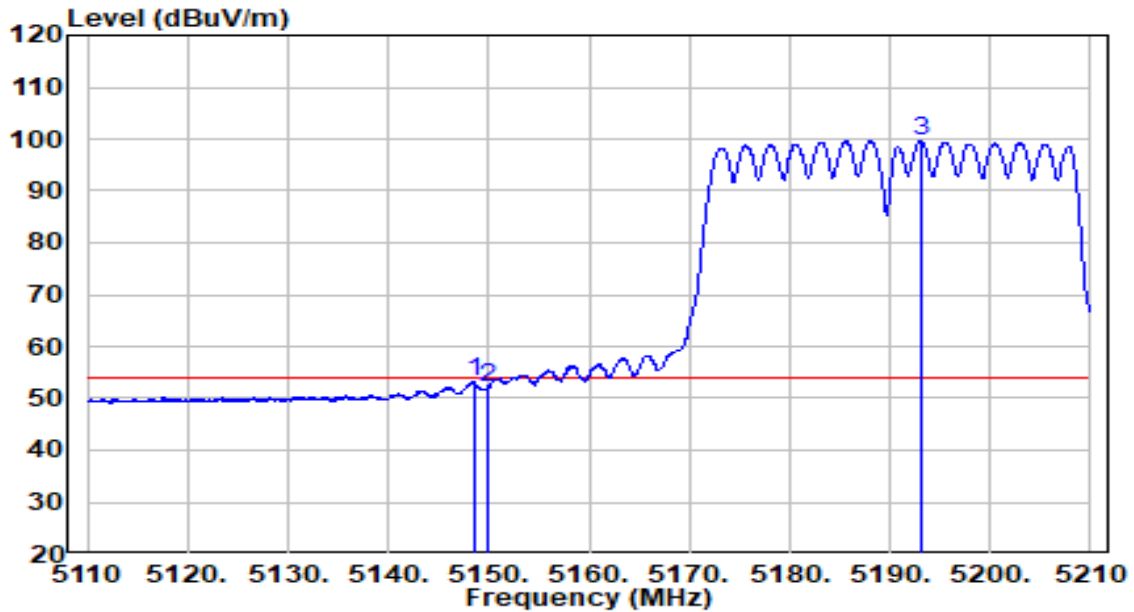


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.550	49.06	4.19	53.25	-0.75	54.00	Average
2	5150.000	47.91	4.20	52.11	-1.89	54.00	Average
3	* 5193.050	95.40	4.27	99.66	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5190MHz by 802.11ac-VHT40	Test Voltage	120V/60Hz

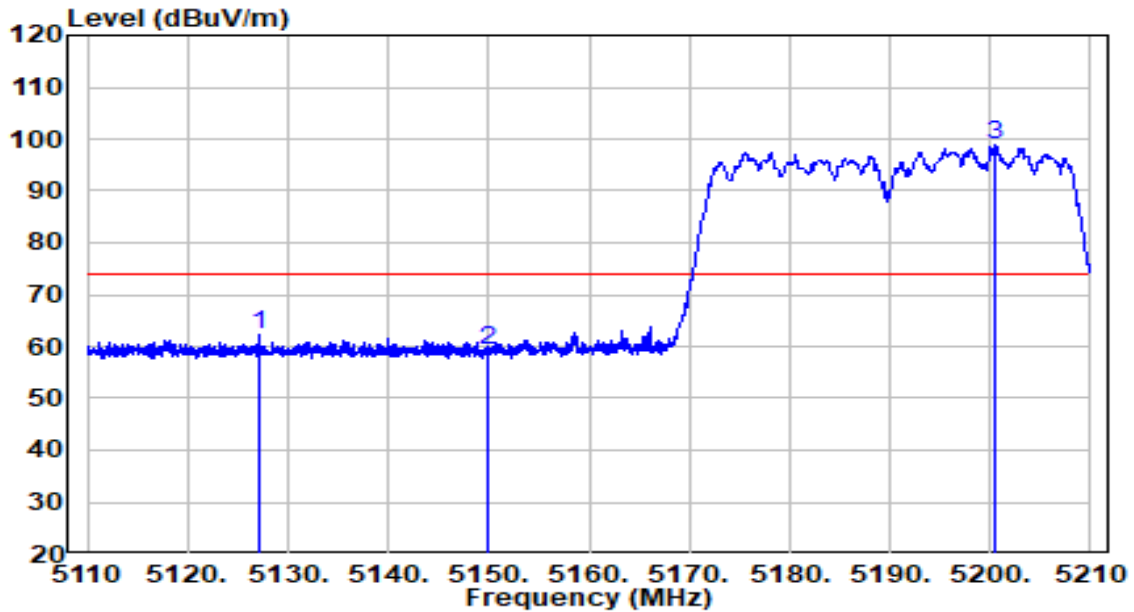


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5127.150	58.03	4.16	62.19	-11.81	74.00	Peak
2	5150.000	55.19	4.20	59.38	-14.62	74.00	Peak
3	* 5200.550	94.48	4.28	98.76	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5190MHz by 802.11ac-VHT40	Test Voltage	120V/60Hz

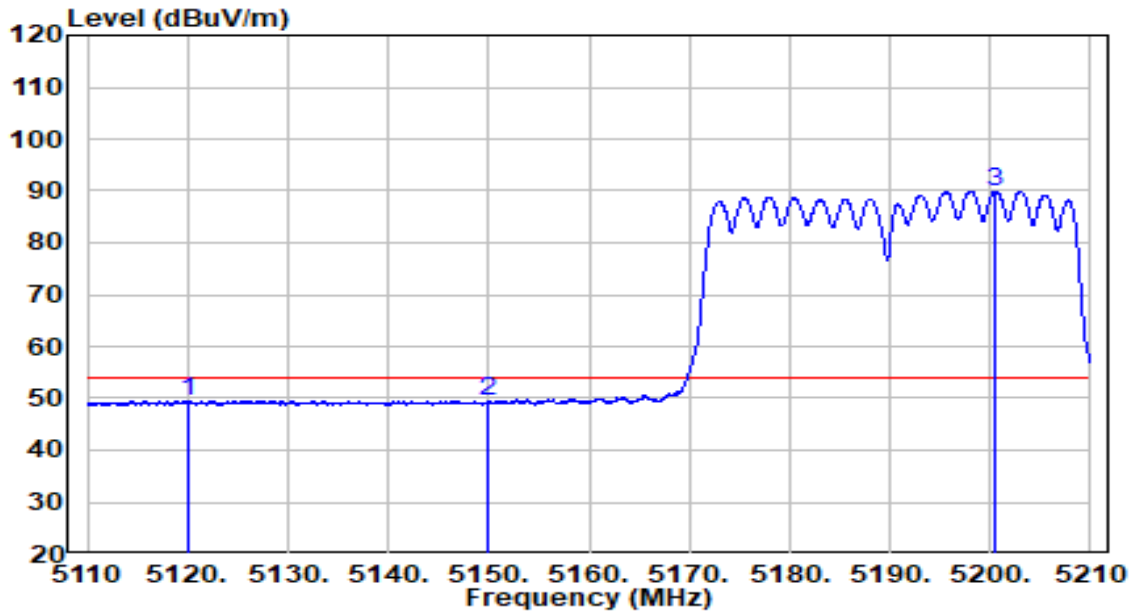


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5120.150	45.39	4.15	49.54	-4.46	54.00	Average
2	5150.000	45.09	4.20	49.29	-4.71	54.00	Average
3	* 5200.550	85.70	4.28	89.98	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5210MHz by 802.11ac-VHT80	Test Voltage	120V/60Hz

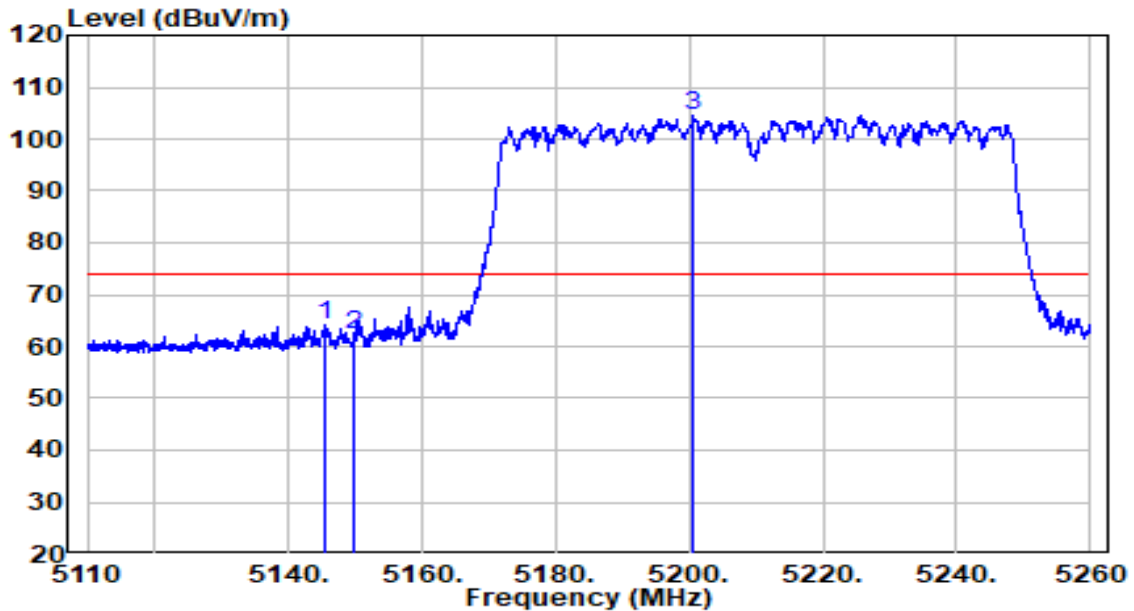


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5145.625	59.83	4.19	64.02	-9.98	74.00	Peak
2	5150.000	58.06	4.20	62.26	-11.74	74.00	Peak
3	* 5200.600	100.15	4.28	104.43	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5210MHz by 802.11ac-VHT80	Test Voltage	120V/60Hz

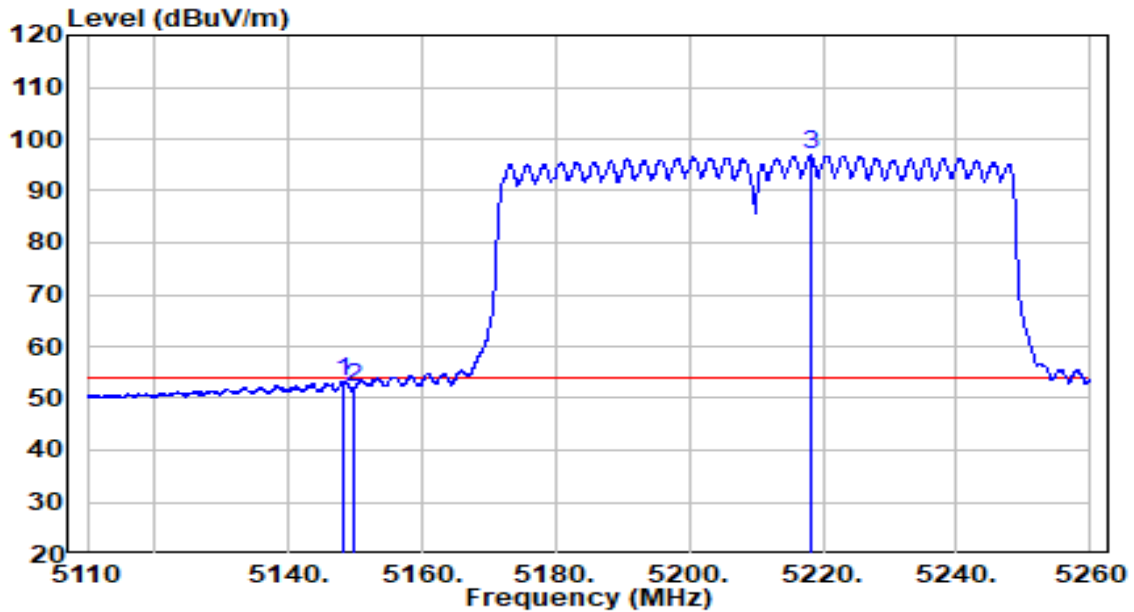


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.400	49.20	4.19	53.39	-0.61	54.00	Average
2	5150.000	47.72	4.20	51.92	-2.08	54.00	Average
3	* 5218.150	92.52	4.31	96.83	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5210MHz by 802.11ac-VHT80	Test Voltage	120V/60Hz

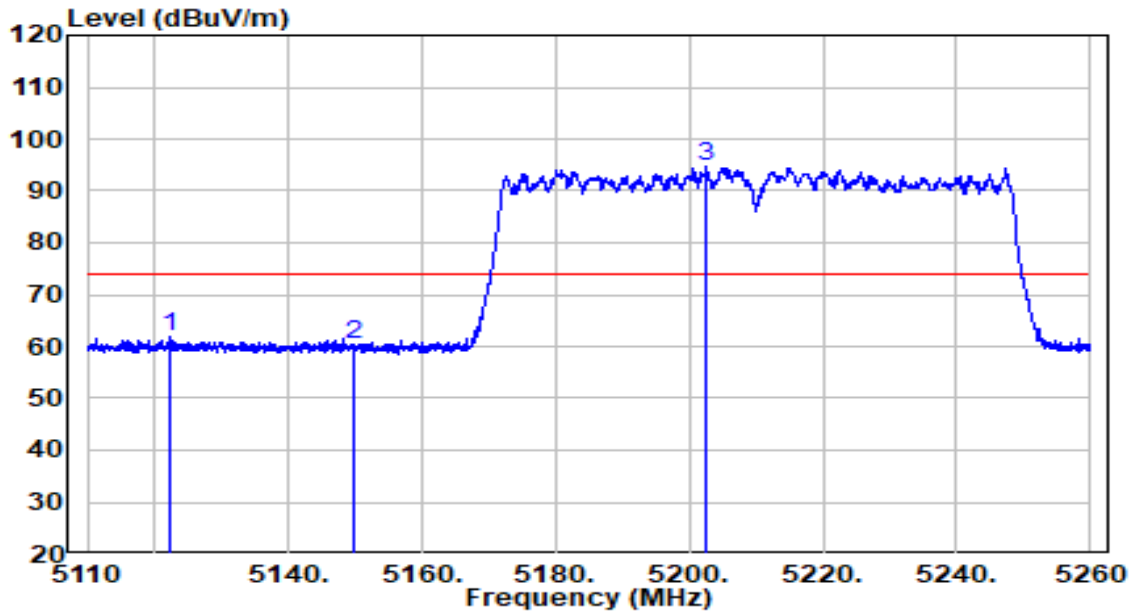


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5122.225	57.59	4.15	61.74	-12.26	74.00	Peak
2	5150.000	56.03	4.20	60.23	-13.77	74.00	Peak
3	* 5202.400	90.25	4.28	94.53	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5210MHz by 802.11ac-VHT80	Test Voltage	120V/60Hz

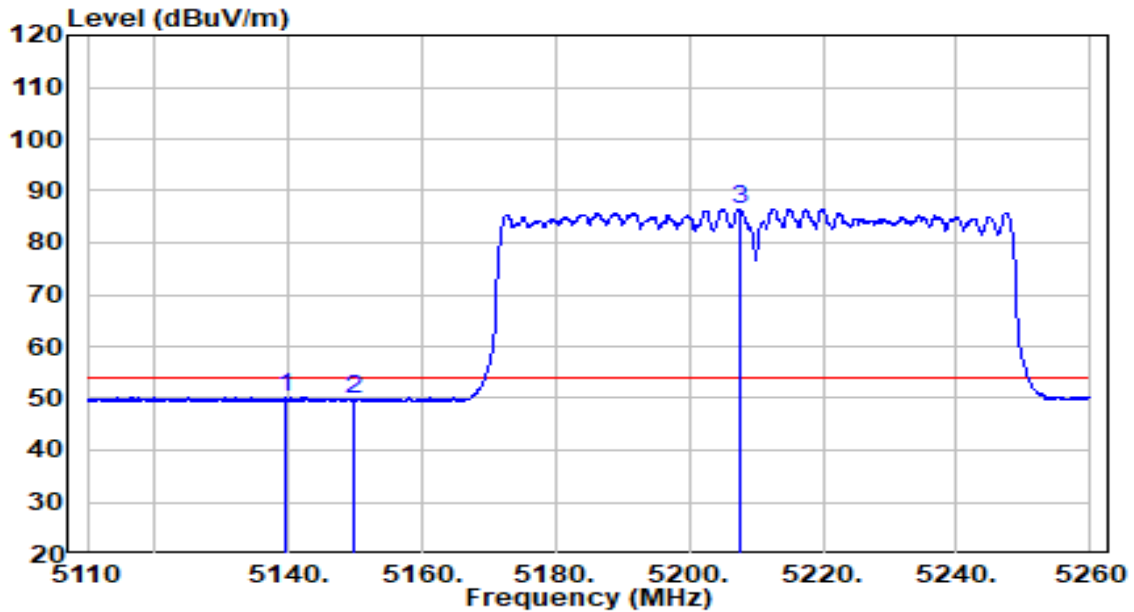


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5139.700	46.08	4.18	50.26	-3.74	54.00	Average
2	5150.000	45.58	4.20	49.77	-4.23	54.00	Average
3	* 5207.425	82.17	4.29	86.46	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5250MHz by 802.11ac-VHT160	Test Voltage	120V/60Hz

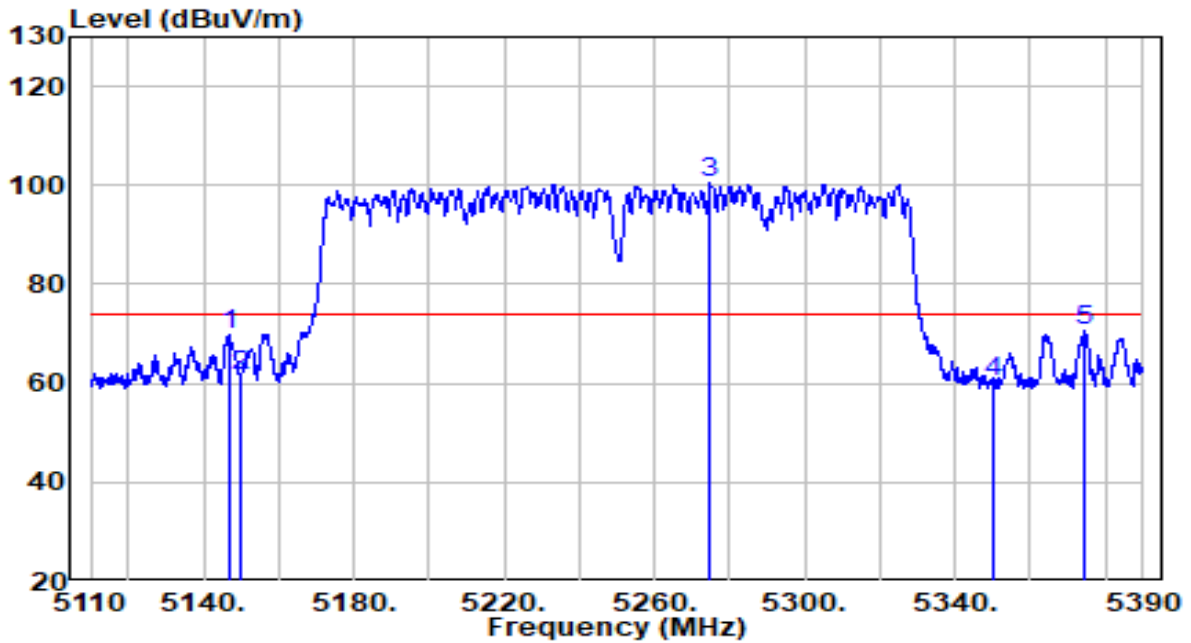


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5146.680	65.71	4.19	69.90	-4.10	74.00	Peak
2	5150.000	57.22	4.20	61.41	-12.59	74.00	Peak
3	* 5274.780	95.94	4.40	100.35	N/A	N/A	Peak
4	5350.000	55.55	4.52	60.07	-13.93	74.00	Peak
5	5374.460	66.14	4.56	70.71	-3.29	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5250MHz by 802.11ac-VHT160	Test Voltage	120V/60Hz

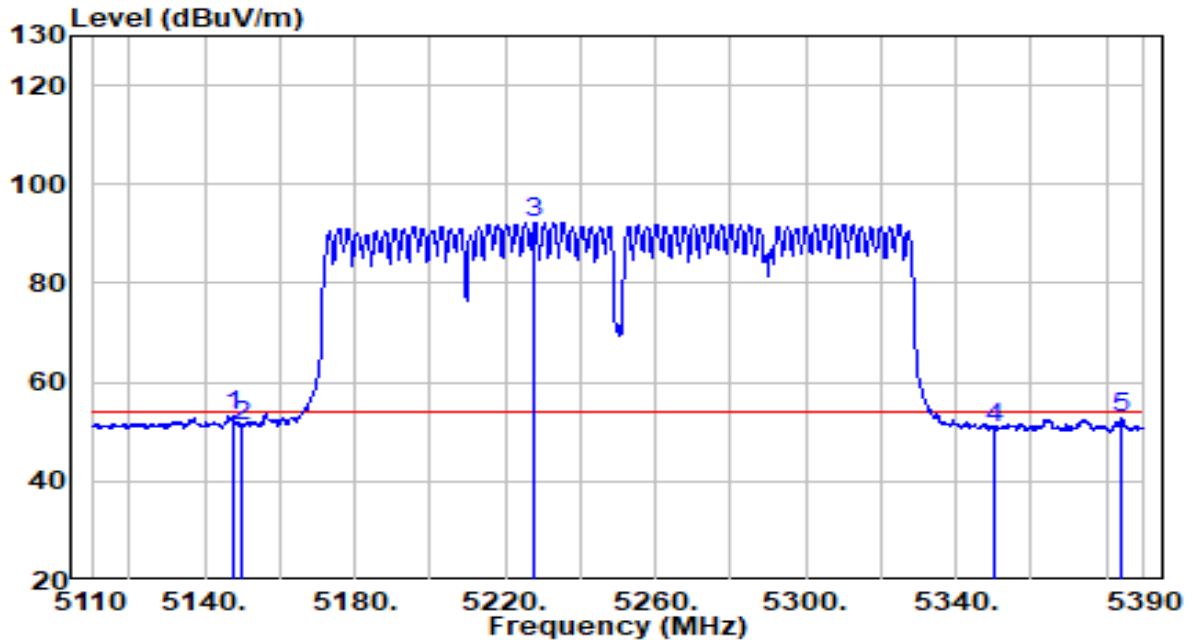


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5147.660	48.87	4.19	53.06	-0.94	54.00	Average
2	5150.000	46.95	4.20	51.15	-2.85	54.00	Average
3	* 5227.880	87.98	4.32	92.30	N/A	N/A	Average
4	5350.000	46.38	4.52	50.91	-3.09	54.00	Average
5	5383.840	48.02	4.58	52.60	-1.40	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5250MHz by 802.11ac-VHT160	Test Voltage	120V/60Hz

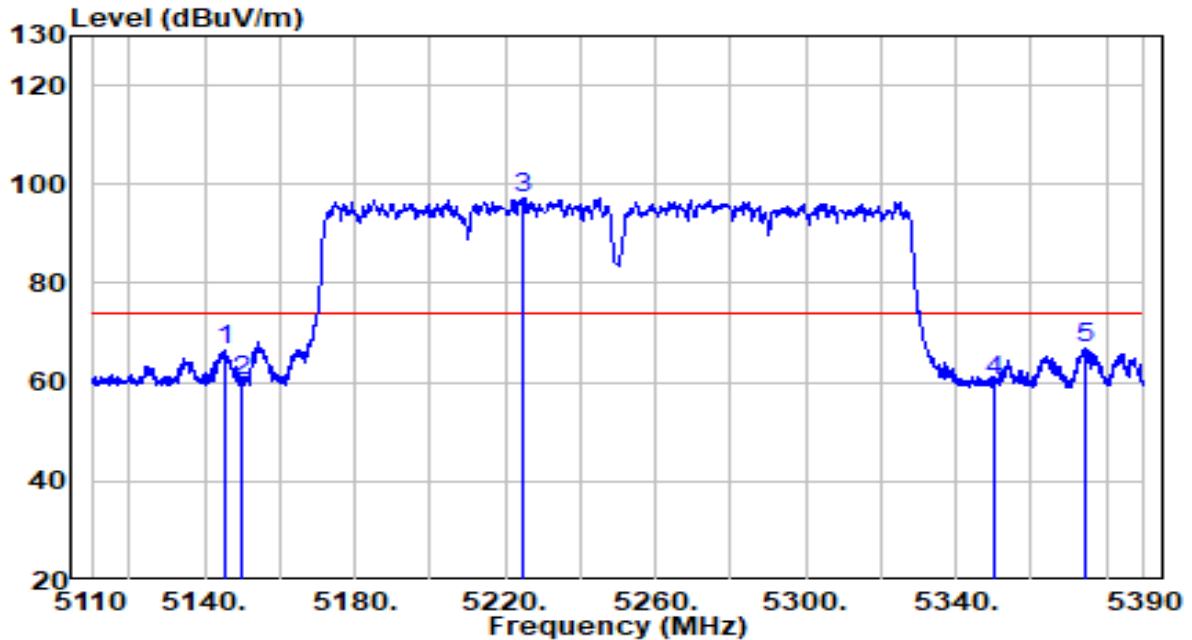


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5145.840	62.30	4.19	66.49	-7.51	74.00	Peak
2	5150.000	56.08	4.20	60.28	-13.72	74.00	Peak
3	* 5224.940	92.93	4.32	97.25	N/A	N/A	Peak
4	5350.000	55.94	4.52	60.46	-13.54	74.00	Peak
5	5374.600	62.22	4.56	66.78	-7.22	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5250MHz by 802.11ac-VHT160	Test Voltage	120V/60Hz

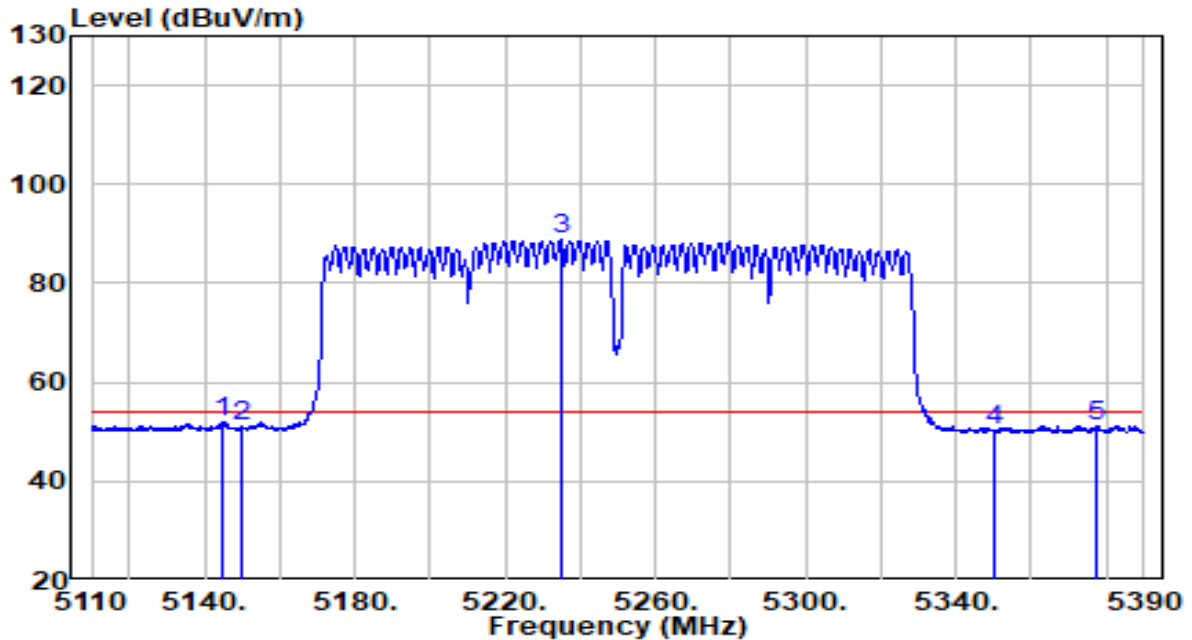


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5144.580	47.88	4.19	52.07	-1.93	54.00	Average
2	5150.000	46.73	4.20	50.93	-3.07	54.00	Average
3	* 5234.880	84.60	4.34	88.93	N/A	N/A	Average
4	5350.000	45.85	4.52	50.37	-3.63	54.00	Average
5	5376.980	46.73	4.57	51.30	-2.70	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

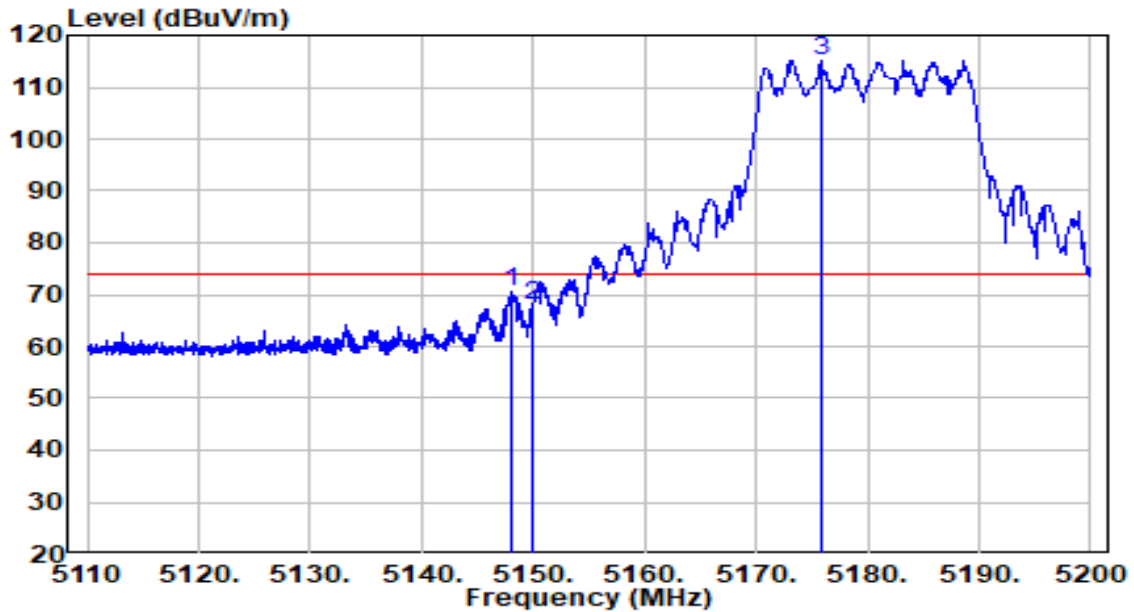


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.115	66.29	4.19	70.48	-3.52	74.00	Peak
2	5150.000	63.67	4.20	67.86	-6.14	74.00	Peak
3	* 5175.790	111.04	4.24	115.28	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

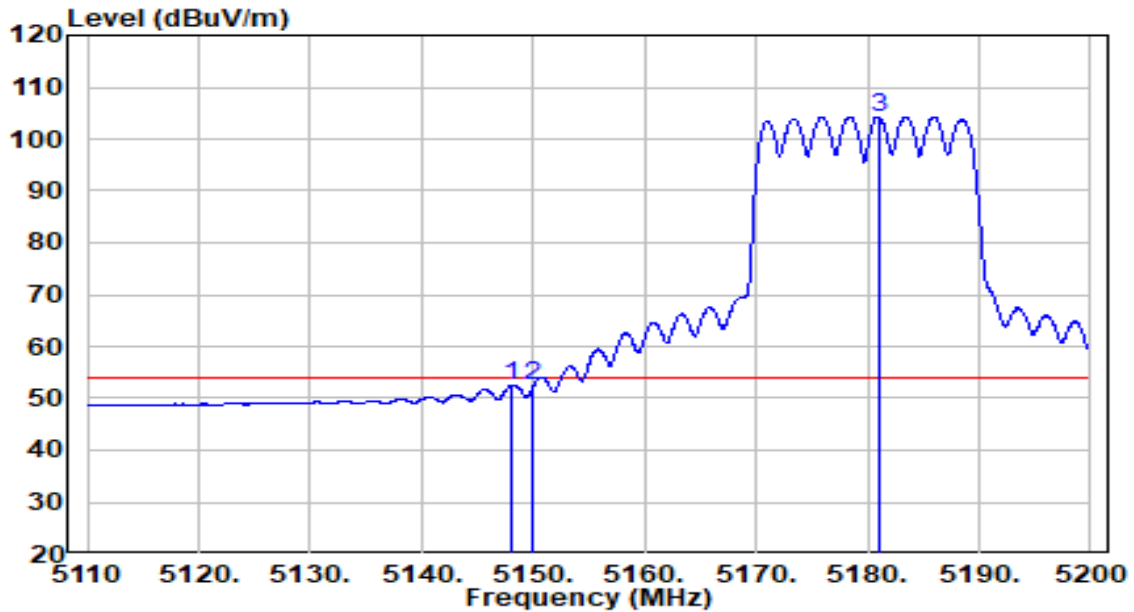


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.160	48.41	4.19	52.61	-1.39	54.00	Average
2	5150.000	48.08	4.20	52.27	-1.73	54.00	Average
3	* 5180.965	100.09	4.25	104.34	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

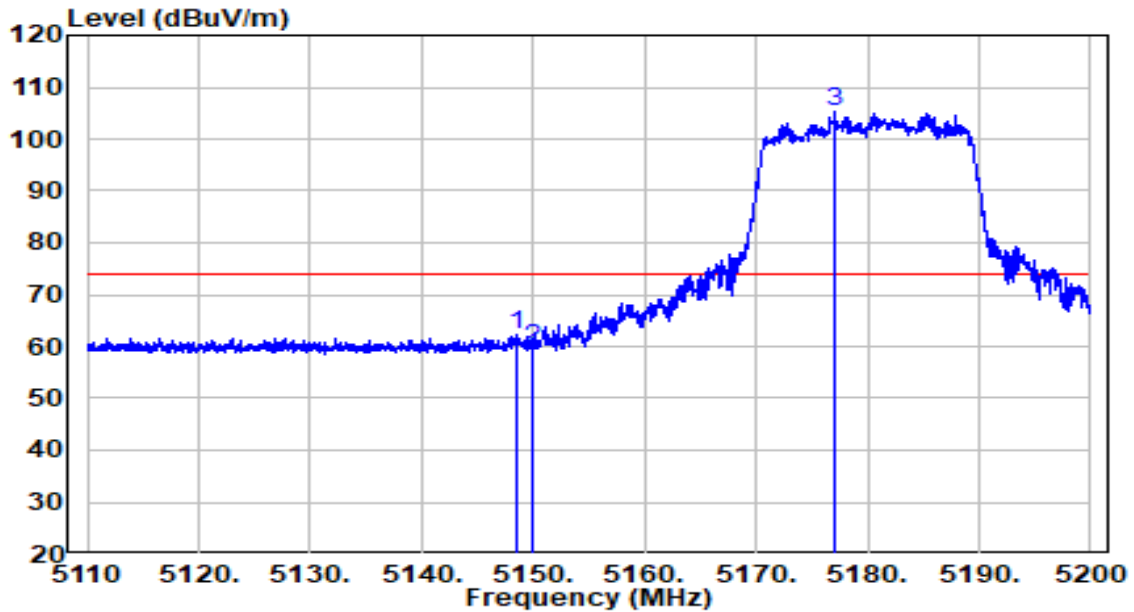


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.475	57.94	4.19	62.14	-11.86	74.00	Peak
2	5150.000	55.44	4.20	59.63	-14.37	74.00	Peak
3	* 5177.050	101.12	4.24	105.36	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5180MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

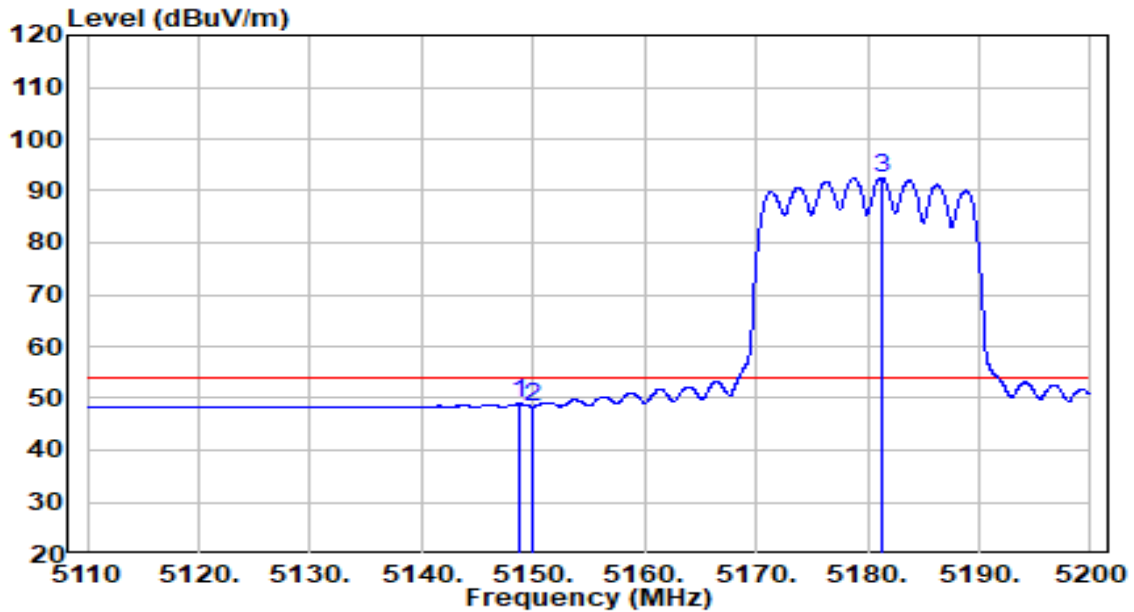


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.655	44.75	4.19	48.94	-5.06	54.00	Average
2	5150.000	44.23	4.20	48.42	-5.58	54.00	Average
3	* 5181.235	88.20	4.25	92.45	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5190MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

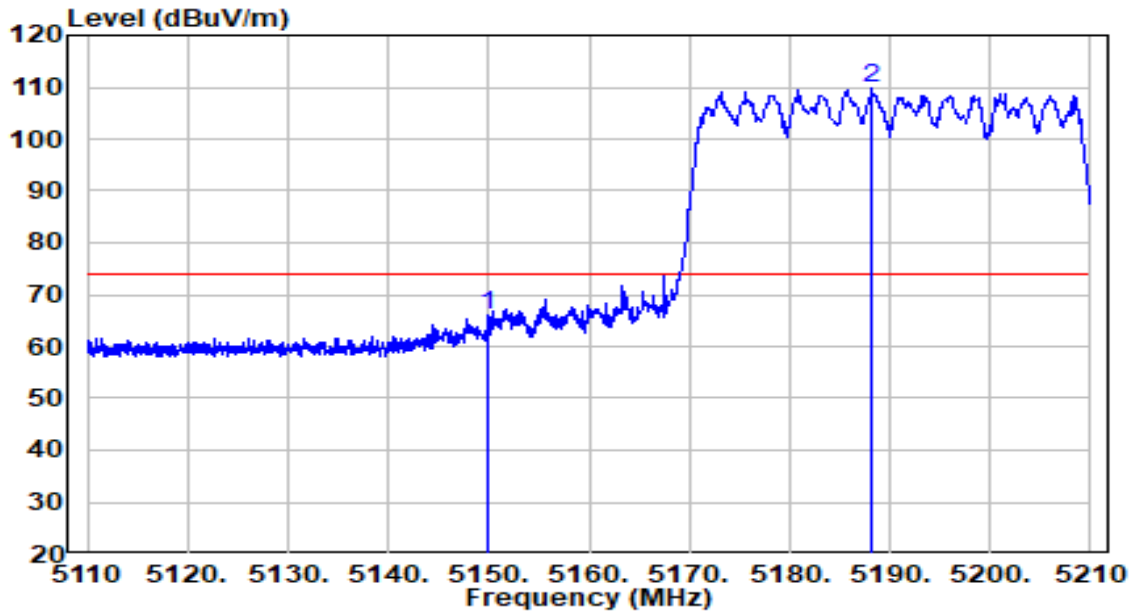


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5150.000	61.67	4.20	65.87	-8.13	74.00	Peak
2	* 5188.250	105.73	4.26	109.99	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5190MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

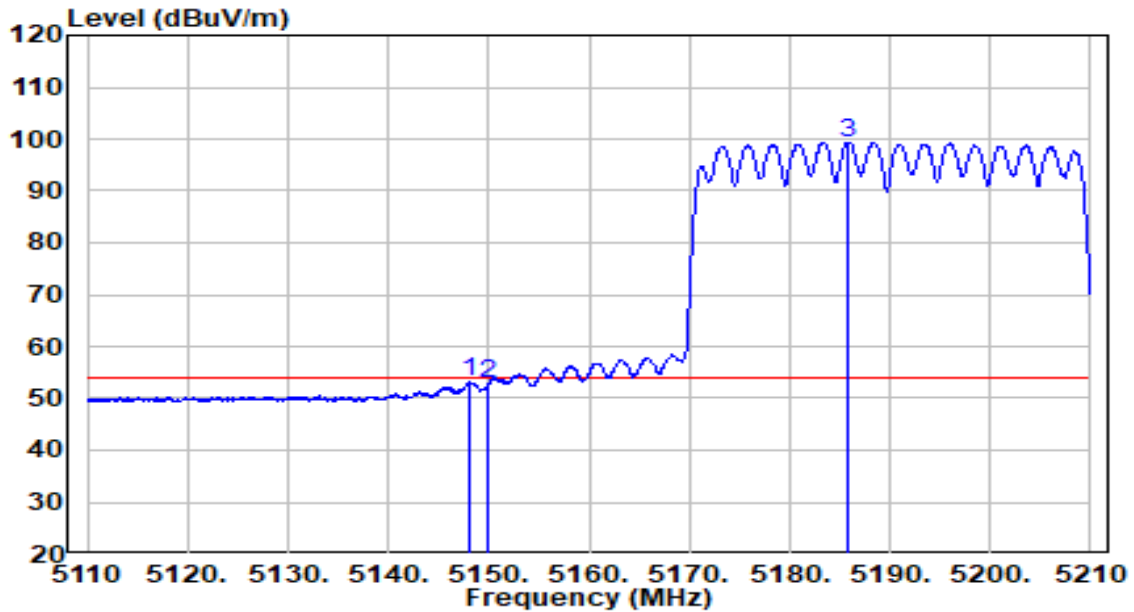


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.200	48.95	4.19	53.15	-0.85	54.00	Average
2	5150.000	48.62	4.20	52.82	-1.18	54.00	Average
3	* 5185.900	95.17	4.25	99.42	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5190MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

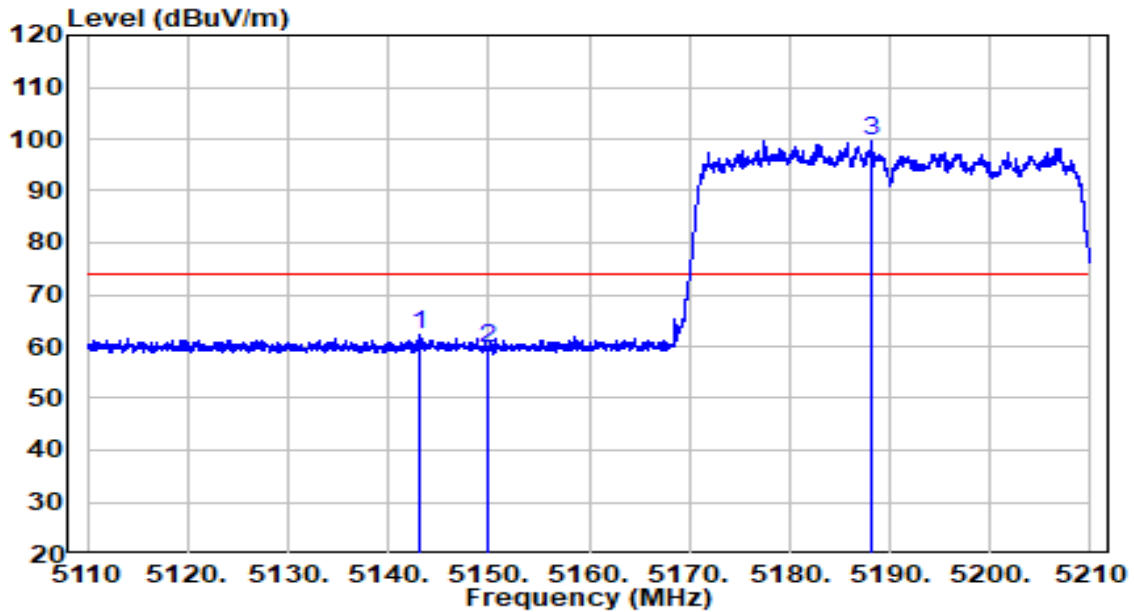


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5143.200	58.11	4.18	62.30	-11.70	74.00	Peak
2	5150.000	55.60	4.20	59.79	-14.21	74.00	Peak
3	* 5188.150	95.45	4.26	99.71	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5190MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

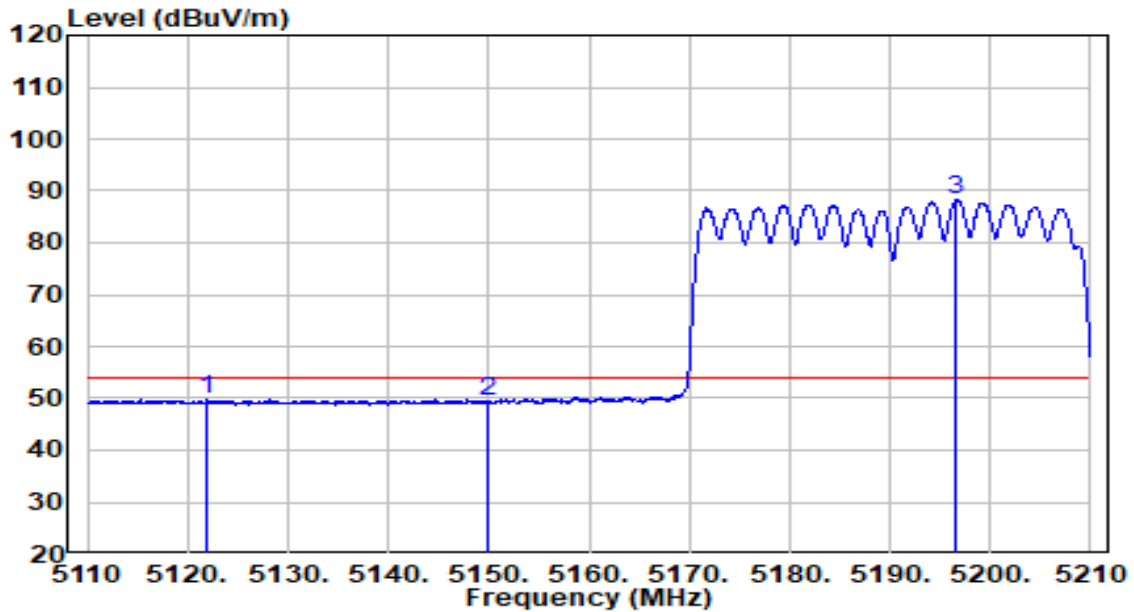


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5121.900	45.73	4.15	49.88	-4.12	54.00	Average
2	5150.000	45.08	4.20	49.28	-4.72	54.00	Average
3	* 5196.650	83.88	4.27	88.15	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5210MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

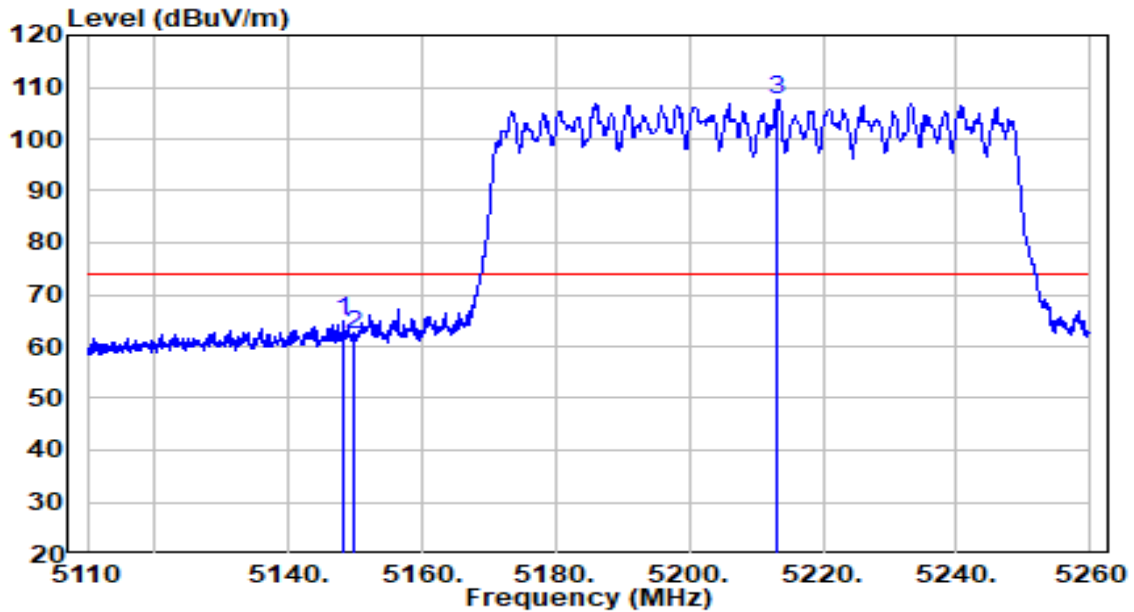


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.250	60.87	4.19	65.07	-8.93	74.00	Peak
2	5150.000	57.97	4.20	62.16	-11.84	74.00	Peak
3	* 5213.275	103.38	4.30	107.68	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5210MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

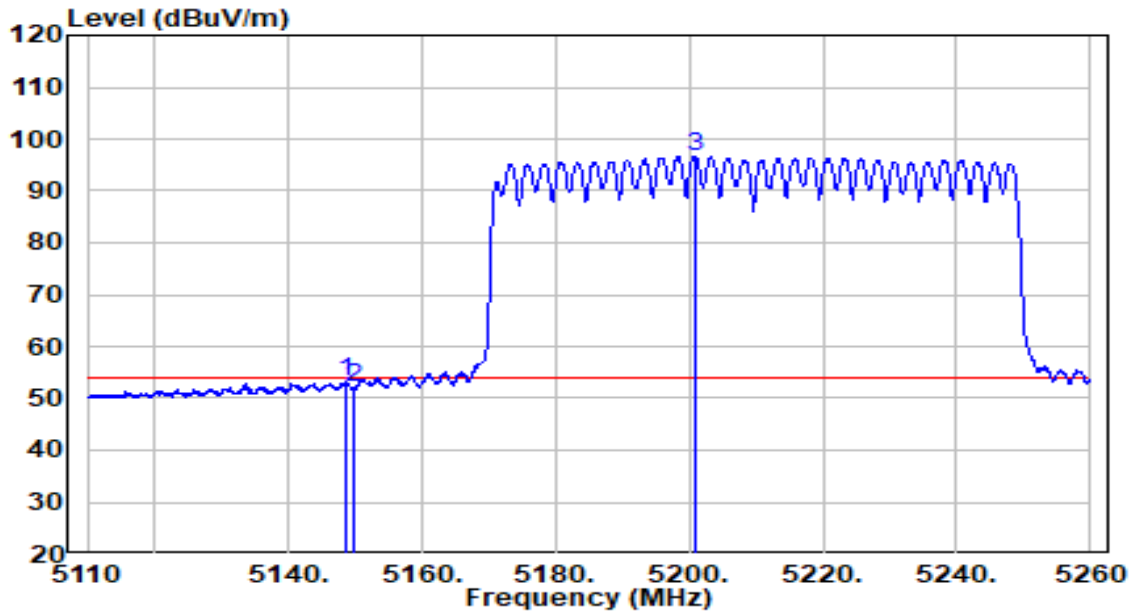


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5148.775	49.11	4.19	53.30	-0.70	54.00	Average
2	5150.000	47.72	4.20	51.92	-2.08	54.00	Average
3	* 5200.825	92.37	4.28	96.65	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5210MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

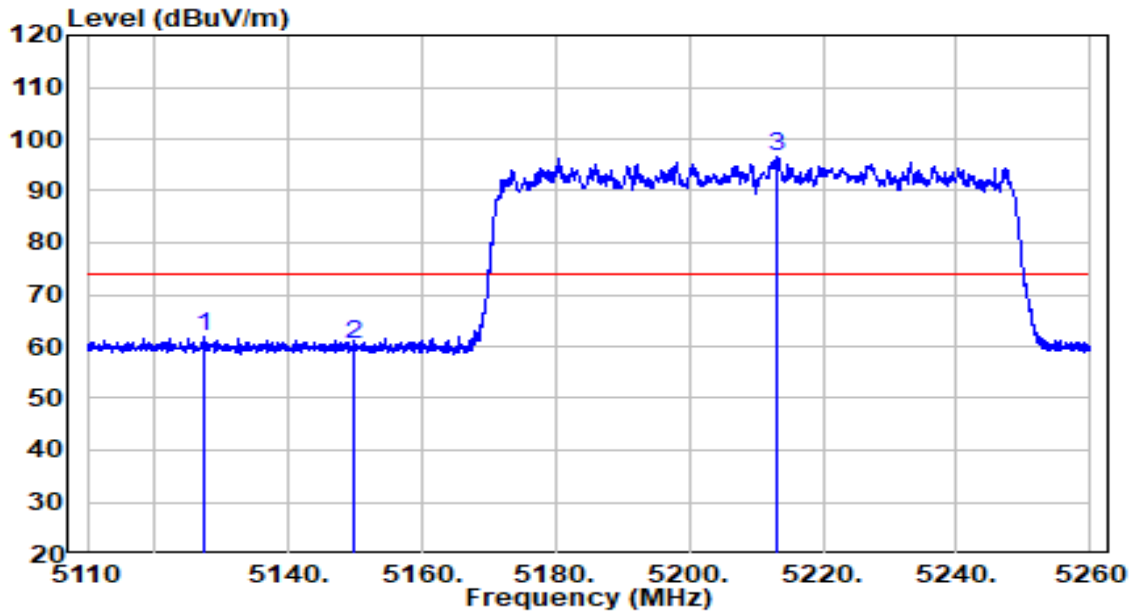


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5127.400	57.54	4.16	61.70	-12.30	74.00	Peak
2	5150.000	56.27	4.20	60.47	-13.53	74.00	Peak
3	* 5213.275	92.31	4.30	96.61	N/A	N/A	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5210MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

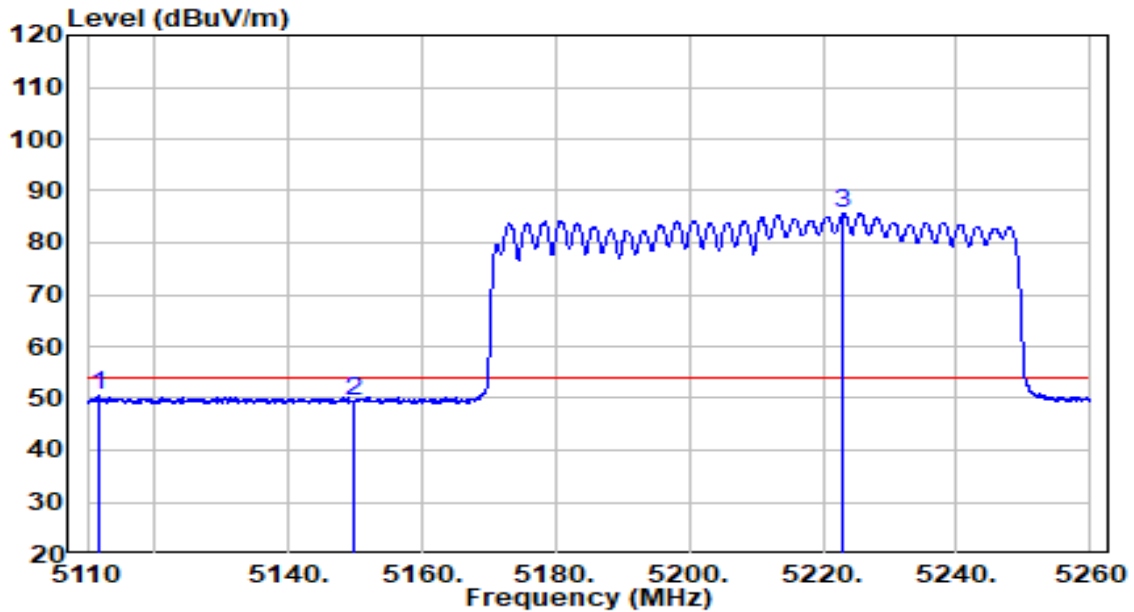


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5111.650	46.42	4.13	50.55	-3.45	54.00	Average
2	5150.000	45.31	4.20	49.51	-4.49	54.00	Average
3	* 5223.025	81.29	4.32	85.61	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5250MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

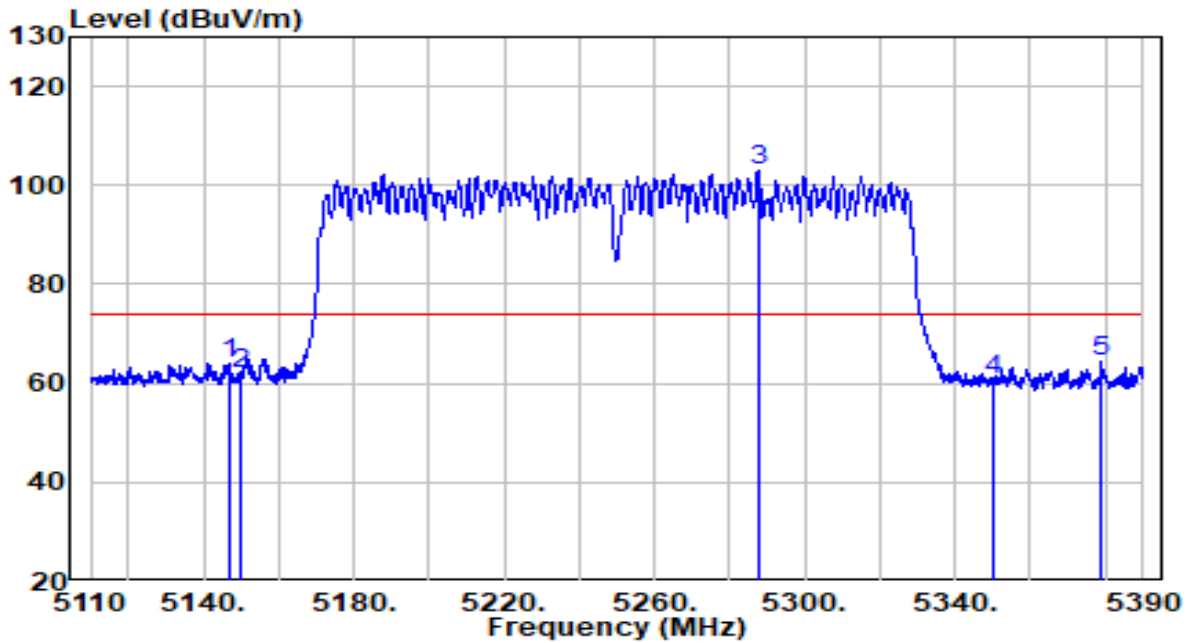


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5146.820	59.86	4.19	64.05	-9.95	74.00	Peak
2	5150.000	57.60	4.20	61.79	-12.21	74.00	Peak
3	* 5287.660	98.50	4.42	102.92	N/A	N/A	Peak
4	5350.000	56.24	4.52	60.76	-13.24	74.00	Peak
5	5378.660	59.84	4.57	64.41	-9.59	74.00	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Horizontal	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5250MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

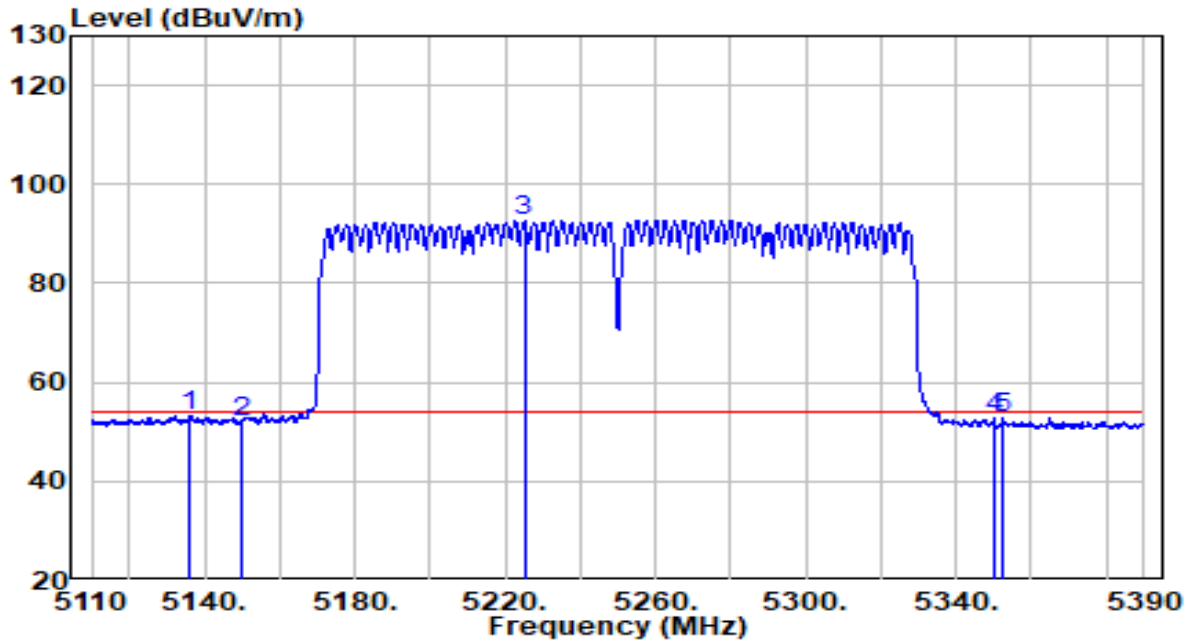


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5136.180	49.05	4.17	53.22	-0.78	54.00	Average
2	5150.000	47.91	4.20	52.10	-1.90	54.00	Average
3	* 5225.080	88.43	4.32	92.75	N/A	N/A	Average
4	5350.000	48.23	4.52	52.76	-1.24	54.00	Average
5	5352.620	48.22	4.53	52.75	-1.25	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5250MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

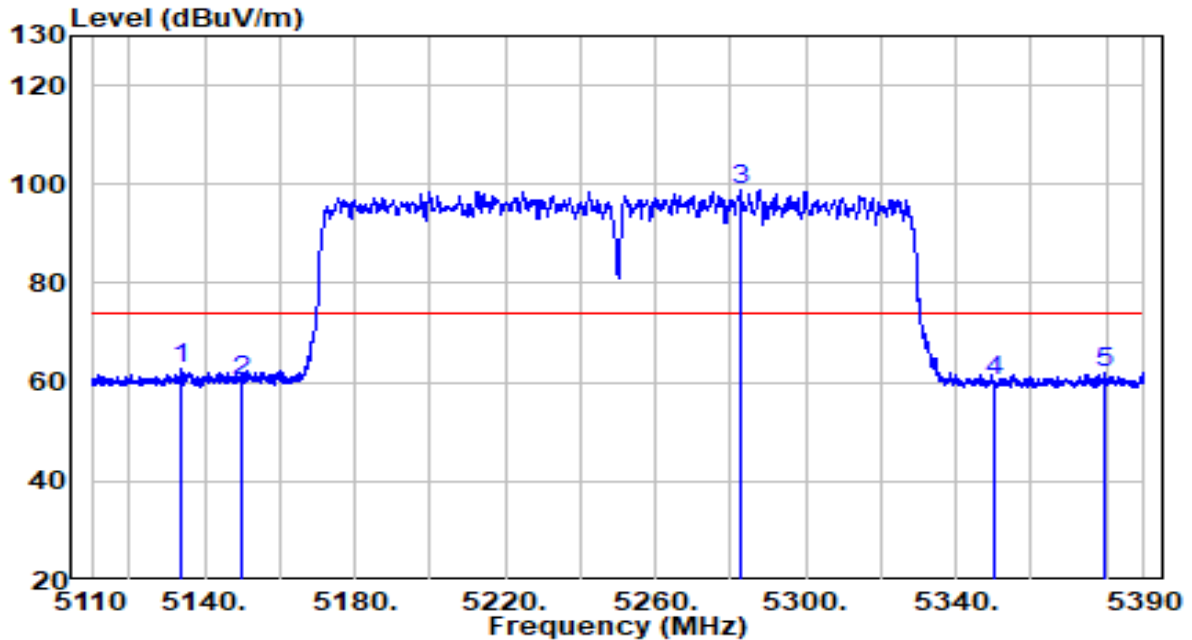


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5134.080	58.45	4.17	62.62	-11.38	74.00	Peak
2	5150.000	55.96	4.20	60.16	-13.84	74.00	Peak
3	* 5282.480	94.60	4.41	99.02	N/A	N/A	Peak
4	5350.000	55.53	4.52	60.06	-13.94	74.00	Peak
5	5379.360	57.34	4.57	61.91	-12.09	74.00	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-11-15
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	21.1°C /49.2%
Polarity	Vertical	Site / Test Engineer	AC1/Jay Chu
Test Mode	Transmit at 5250MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

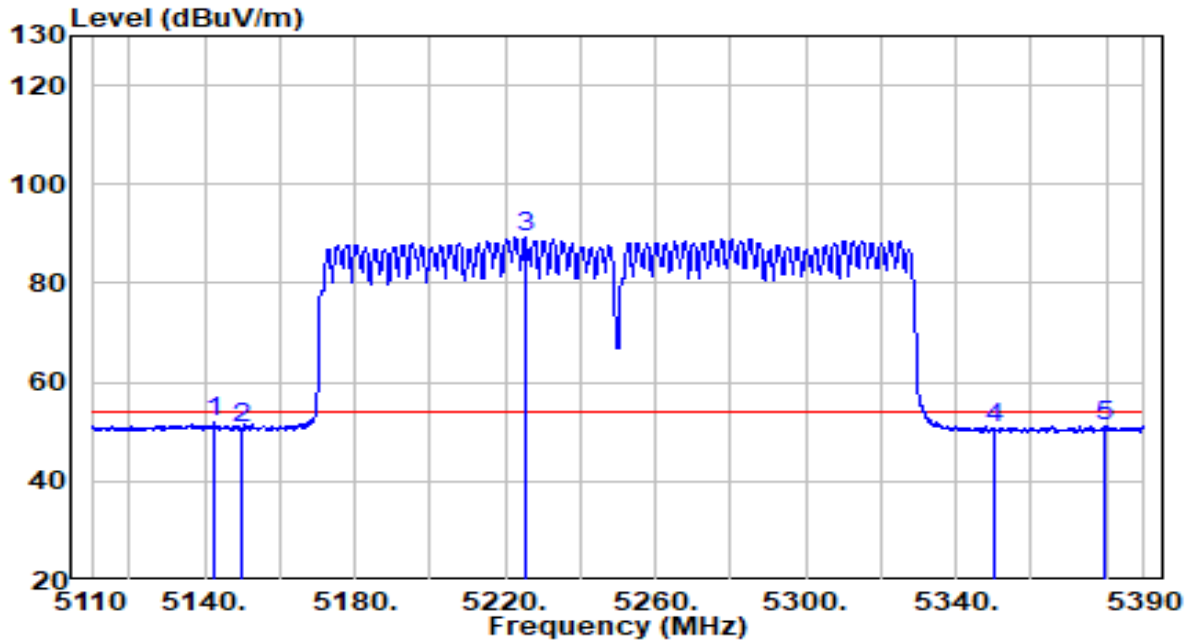

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5142.900	47.60	4.18	51.78	-2.22	54.00	Average
2	5150.000	46.66	4.20	50.86	-3.14	54.00	Average
3	* 5225.360	85.20	4.32	89.52	N/A	N/A	Average
4	5350.000	46.02	4.52	50.55	-3.45	54.00	Average
5	5379.220	46.62	4.57	51.20	-2.80	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

7.9. AC Conducted Emissions Measurement


7.9.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.9.2. Test Setup

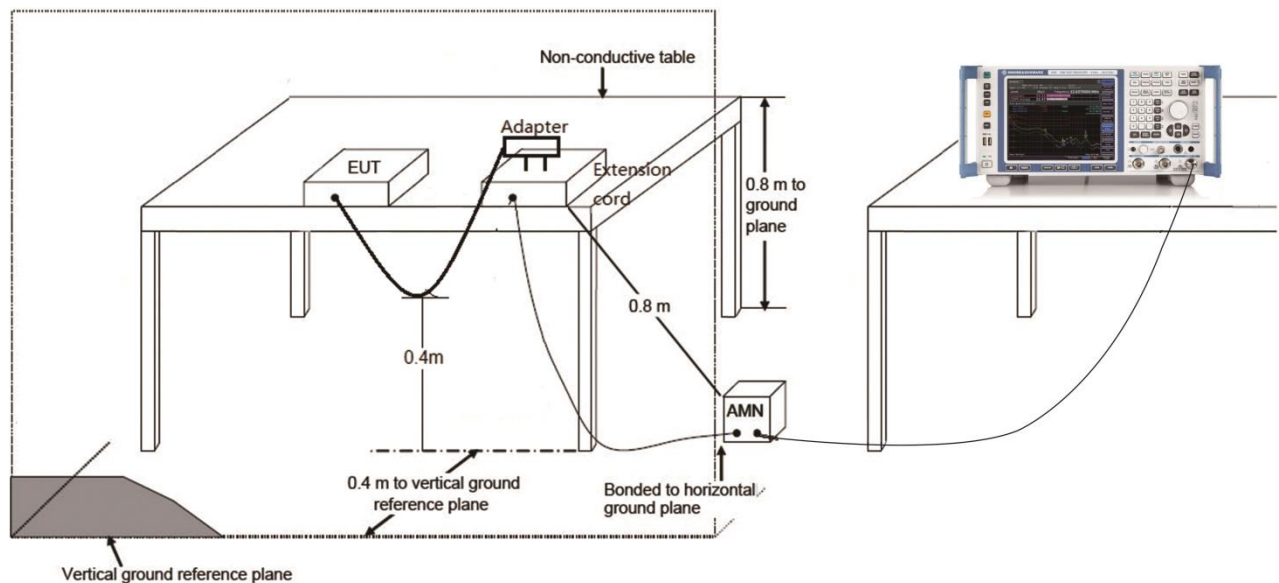

7.9.3.Test Result

EUT	ACCESS POINT	Date of Test	2021-10-23
Factor	CE_ENV216-L1 (Filter OFF)	Temp. / Humidity	20.8°C /47.5%
Polarity	Line1	Site / Test Engineer	SR2/Eric Lin
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz	Test Voltage	120V/60Hz

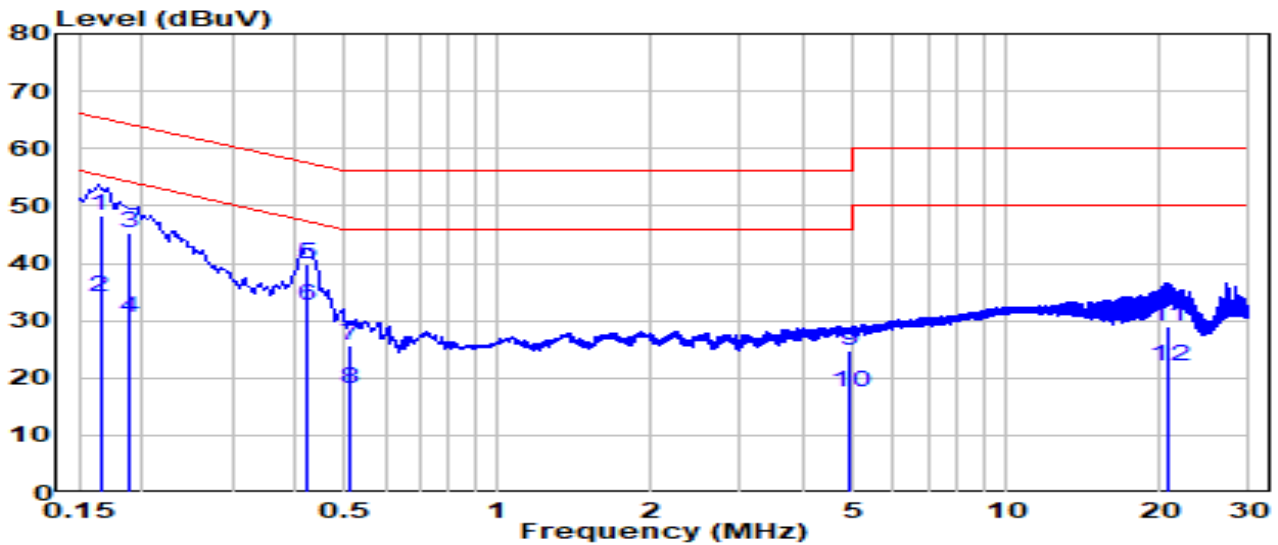


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	0.165	38.61	9.61	48.22	-16.99	65.21	QP
2	0.165	24.51	9.61	34.12	-21.09	55.21	Average
3	0.189	35.61	9.61	45.22	-18.86	64.08	QP
4	0.189	21.01	9.61	30.62	-23.46	54.08	Average
5	0.421	30.29	9.63	39.92	-17.51	57.43	QP
6	*	0.421	9.63	32.52	-14.91	47.43	Average
7	0.512	15.99	9.63	25.62	-30.38	56.00	QP
8	0.512	8.39	9.63	18.02	-27.98	46.00	Average
9	4.899	15.04	9.74	24.78	-31.22	56.00	QP
10	4.899	7.74	9.74	17.48	-28.52	46.00	Average
11	20.720	18.94	9.98	28.92	-31.08	60.00	QP
12	20.720	11.94	9.98	21.92	-28.08	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement(dBμV) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-10-23
Factor	CE_ENV216-N (Filter OFF)	Temp. / Humidity	20.8°C /47.5%
Polarity	Neutral	Site / Test Engineer	SR2/Eric Lin
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz	Test Voltage	120V/60Hz

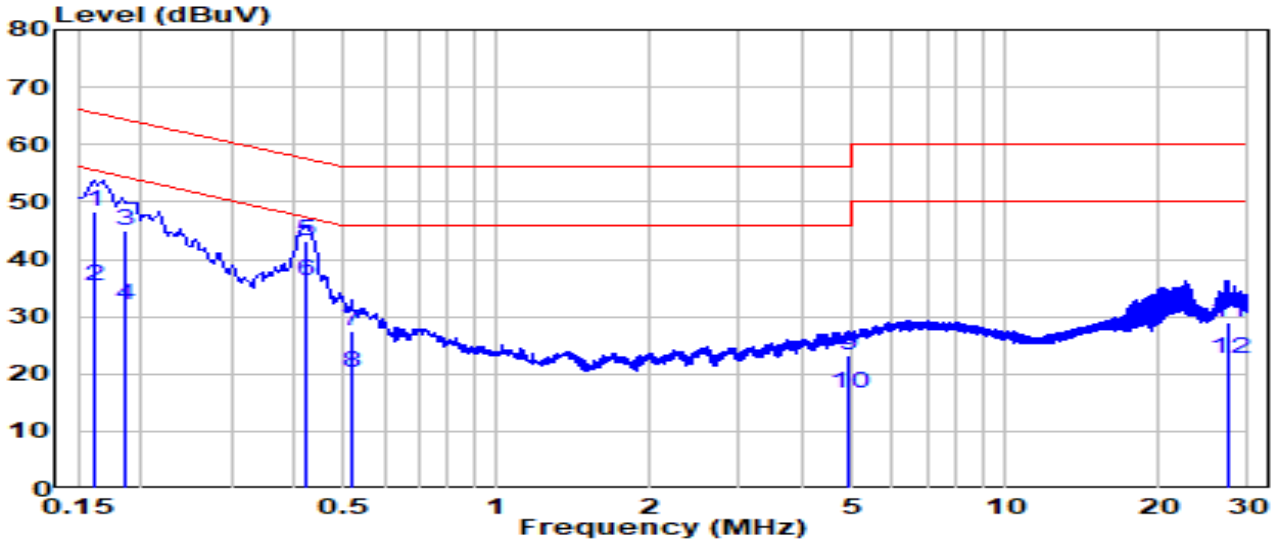

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)	
1	0.162	38.69	9.62	48.31	-17.05	65.36	QP	
2	0.162	25.69	9.62	35.31	-20.05	55.36	Average	
3	0.185	35.30	9.62	44.91	-19.35	64.26	QP	
4	0.185	22.40	9.62	32.01	-22.25	54.26	Average	
5	0.421	33.58	9.63	43.21	-14.22	57.43	QP	
6	*	0.421	26.48	9.63	36.11	-11.32	47.43	Average
7	0.521	17.98	9.63	27.61	-28.39	56.00	QP	
8	0.521	10.58	9.63	20.21	-25.79	46.00	Average	
9	4.899	13.42	9.75	23.17	-32.83	56.00	QP	
10	4.899	6.92	9.75	16.67	-29.33	46.00	Average	
11	27.450	18.74	10.14	28.88	-31.12	60.00	QP	
12	27.450	12.44	10.14	22.58	-27.42	50.00	Average	

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement(dBμV) = Reading(dBμV) + C.F (Correction Factor).

Appendix A - Test Setup Photograph

Refer to "AP-615_Test Setup Photo" file.

Appendix B - EUT Photograph

Refer to "AP-615_EUT Photo" file.

————— The End —————