


EUT	ACCESS POINT	Date of Test	2022-04-12
Factor	SIP-AC3_VULB 9168 _30-1000MHz	Temp. / Humidity	21.9°C/46.4%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz	Test Voltage	120V/60Hz

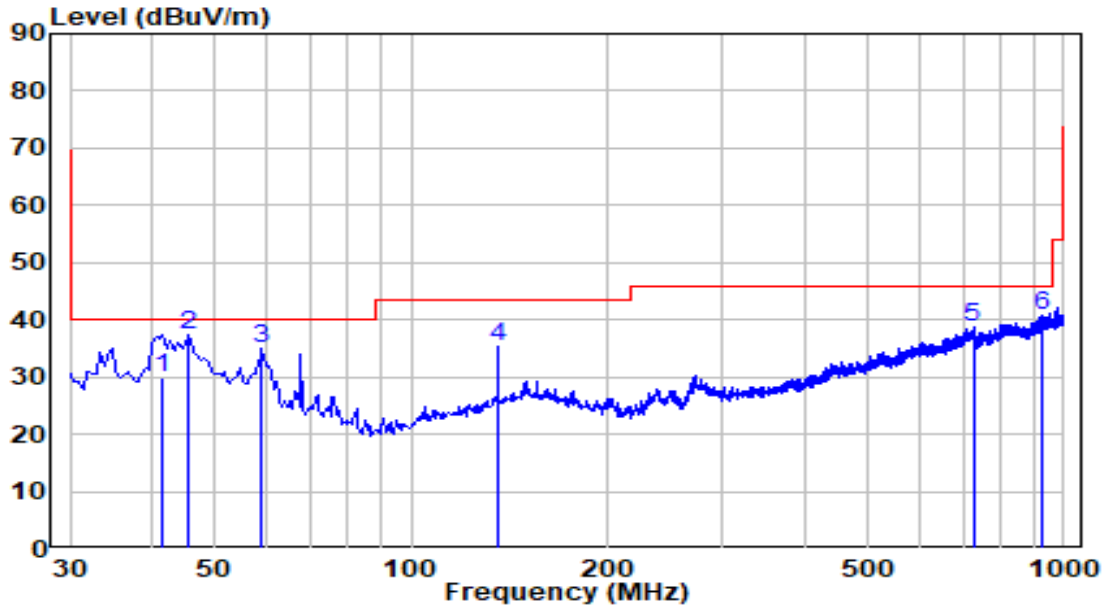


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	41.640	8.64	21.30	29.94	-10.06	40.00	QP
2	* 45.520	15.39	21.83	37.22	-2.78	40.00	Peak
3	59.100	14.70	20.38	35.08	-4.92	40.00	Peak
4	135.730	19.23	16.14	35.37	-8.13	43.50	Peak
5	725.975	8.94	29.73	38.67	-7.33	46.00	Peak
6	925.310	8.81	31.97	40.78	-5.22	46.00	Peak

Note:

- "\*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
- Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

### The Result of Radiated Spurious Emission above 18GHz:

EUT	ACCESS POINT	Date of Test	2022-04-12
Factor	SIP-AC2_BBHA9170_18-40GHz(06598)	Temp. / Humidity	21.9°C/46.4%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz	Test Voltage	120V/60Hz

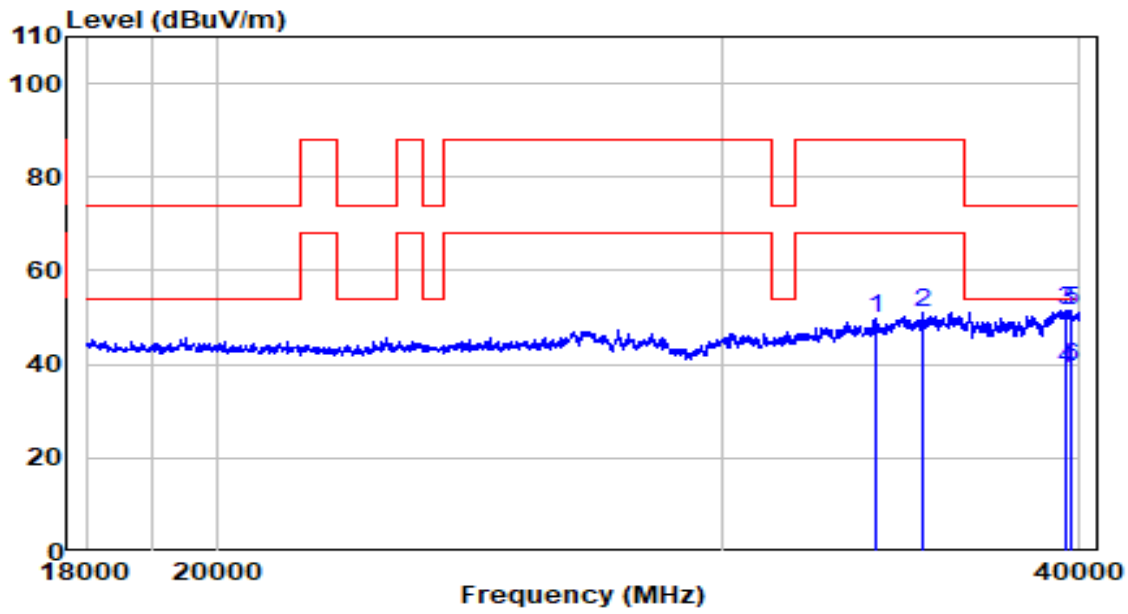


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	33983.000	58.96	-9.06	49.90	-38.30	88.20	Peak
2	35226.000	57.94	-6.97	50.97	-37.23	88.20	Peak
3	39527.000	52.73	-1.19	51.55	-22.45	74.00	Peak
4	39527.000	40.37	-1.19	39.18	-14.82	54.00	Average
5	39714.000	52.14	-0.55	51.59	-22.41	74.00	Peak
6	* 39714.000	39.77	-0.55	39.23	-14.77	54.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-04-12
Factor	SIP-AC2_BBHA9170_18-40GHz(06598)	Temp. / Humidity	21.9°C/46.4%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz	Test Voltage	120V/60Hz

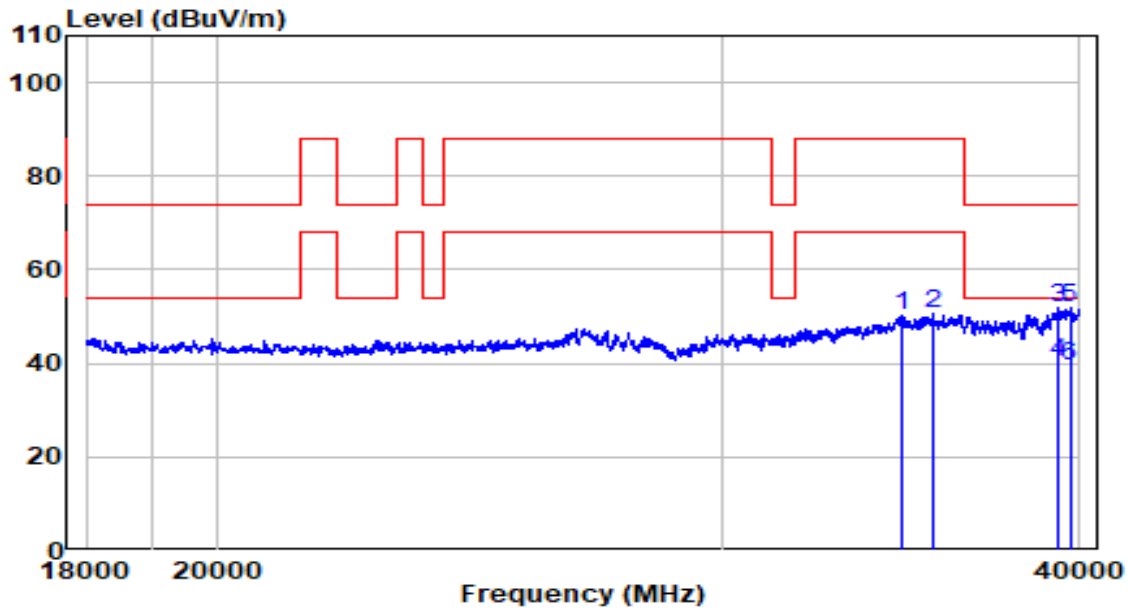

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	34687.000	57.55	-7.39	50.16	-38.04	88.20	Peak
2	35567.000	56.76	-6.30	50.46	-37.74	88.20	Peak
3	39318.000	53.15	-1.46	51.69	-22.31	74.00	Peak
4	* 39318.000	41.74	-1.46	40.28	-13.72	54.00	Average
5	39681.000	52.52	-0.68	51.84	-22.16	74.00	Peak
6	39681.000	40.23	-0.68	39.55	-14.45	54.00	Average


Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

### A.9 Radiated Restricted Band Edge Test Result

#### Akoustic Filter N<sub>ss</sub>=1

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5955MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

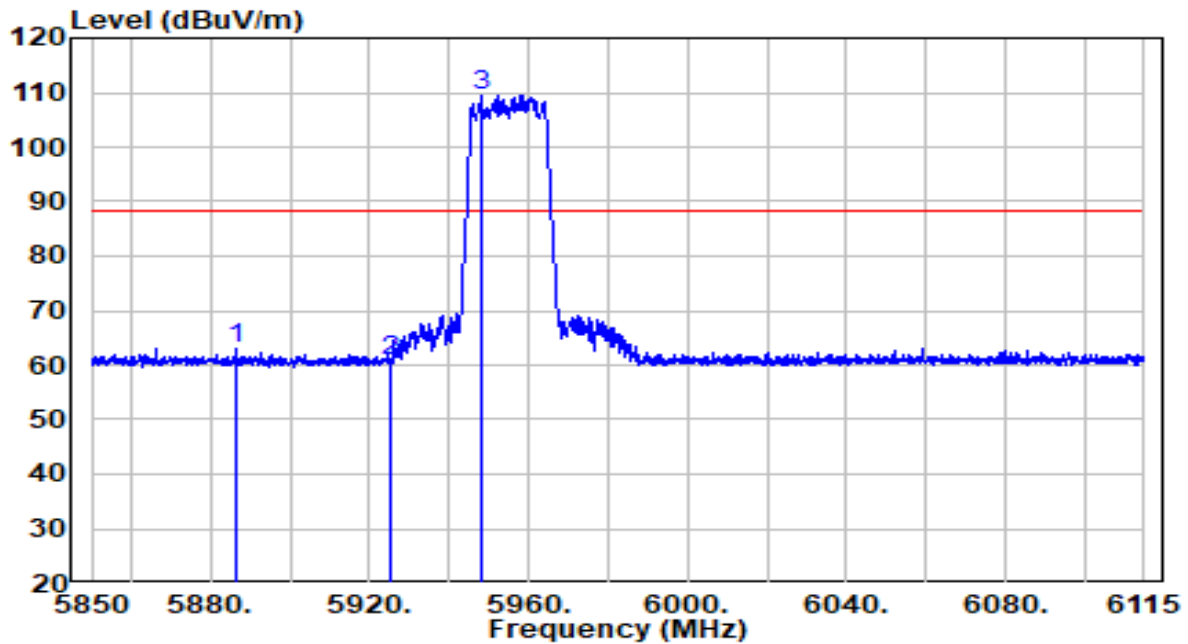


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5886.570	71.49	-8.63	62.86	-25.34	88.20	Peak
2	5925.000	69.23	-8.58	60.65	-27.55	88.20	Peak
3	* 5948.183	118.04	-8.63	109.41	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5955MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

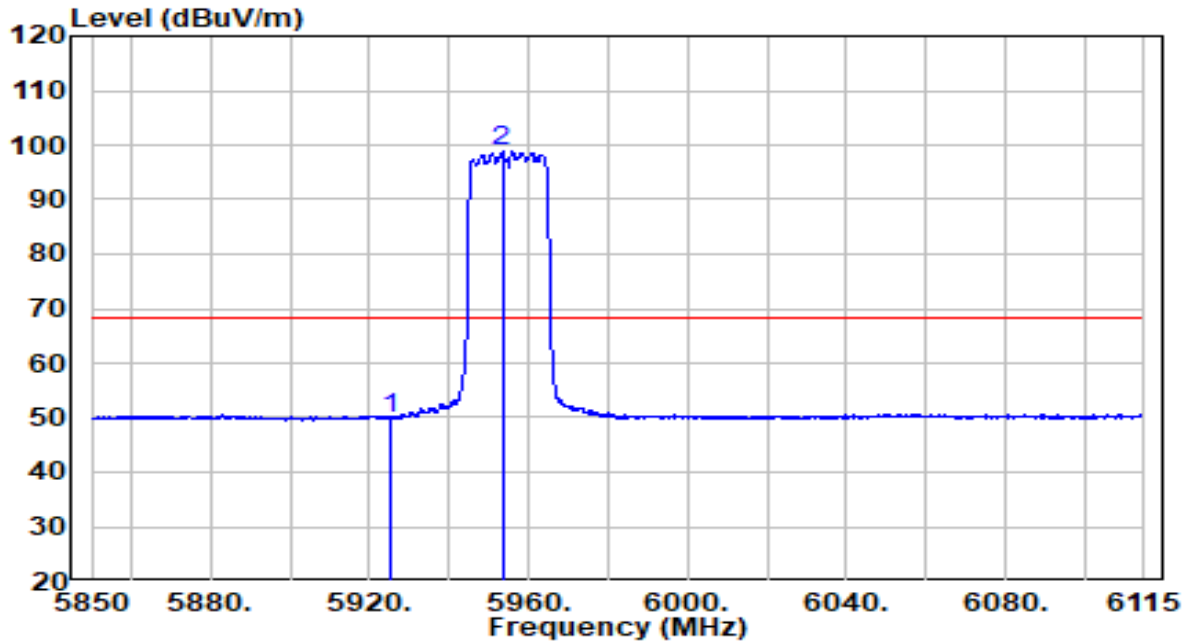


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5924.995	58.56	-8.58	49.98	-18.22	68.20	Average
2	* 5953.350	107.35	-8.64	98.71	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5955MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

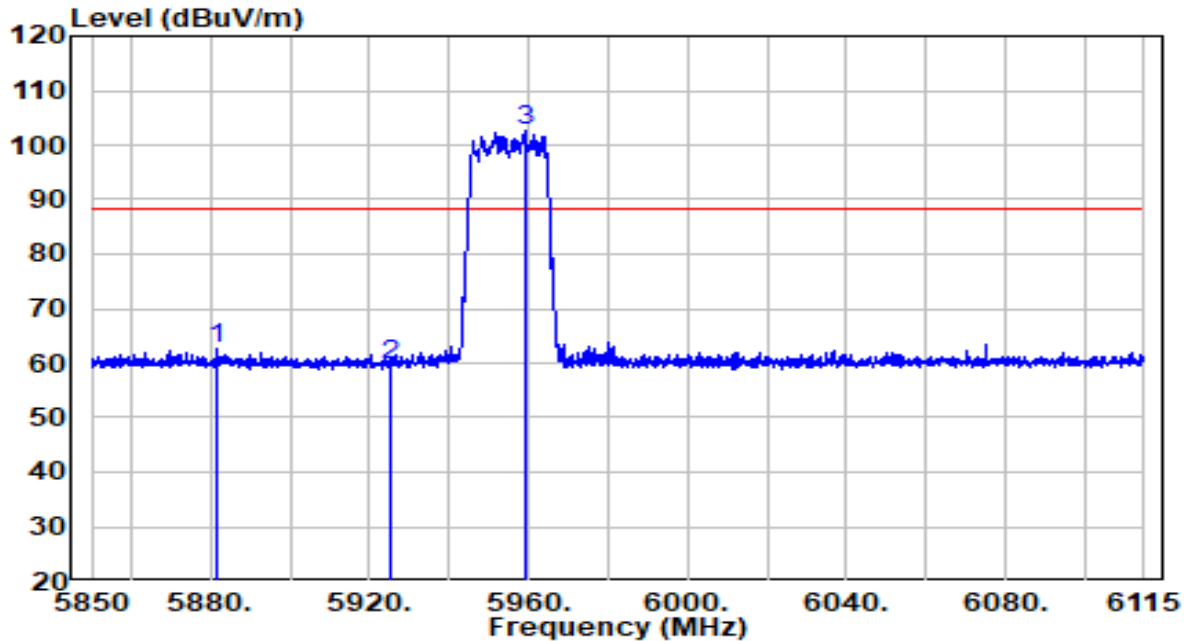


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5881.402	71.22	-8.62	62.61	-25.59	88.20	Peak
2	5925.000	68.37	-8.58	59.79	-28.41	88.20	Peak
3	* 5959.180	111.30	-8.65	102.65	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5955MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

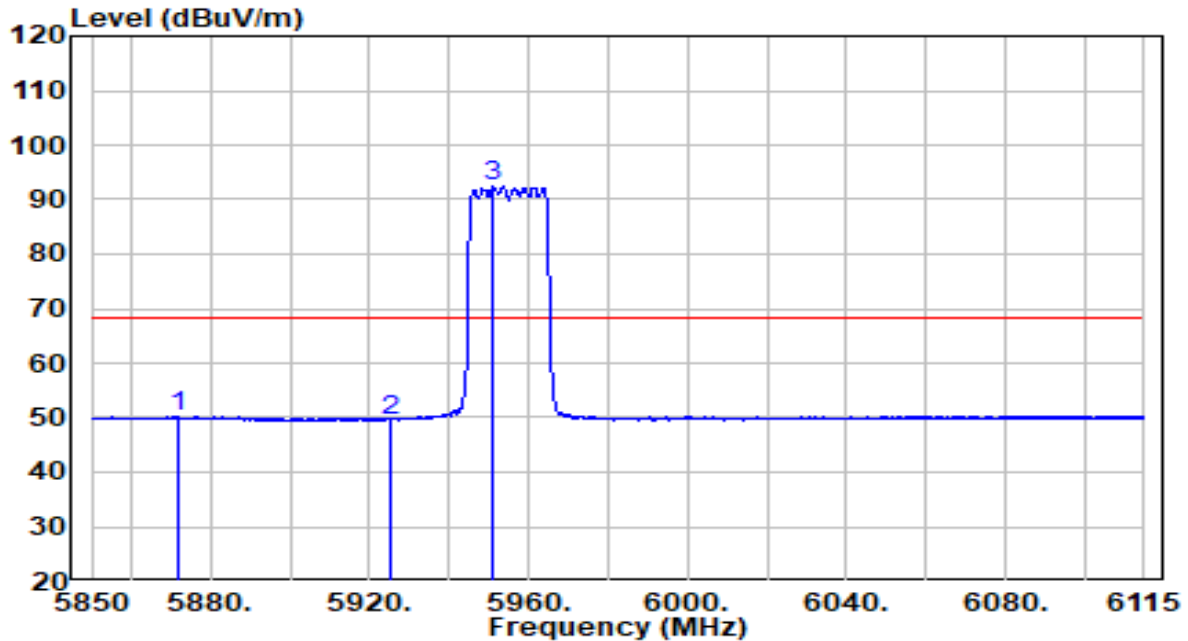


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5871.465	58.72	-8.64	50.08	-18.12	68.20	Average
2	5925.000	58.17	-8.58	49.58	-18.62	68.20	Average
3	* 5950.965	101.01	-8.63	92.38	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7095MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

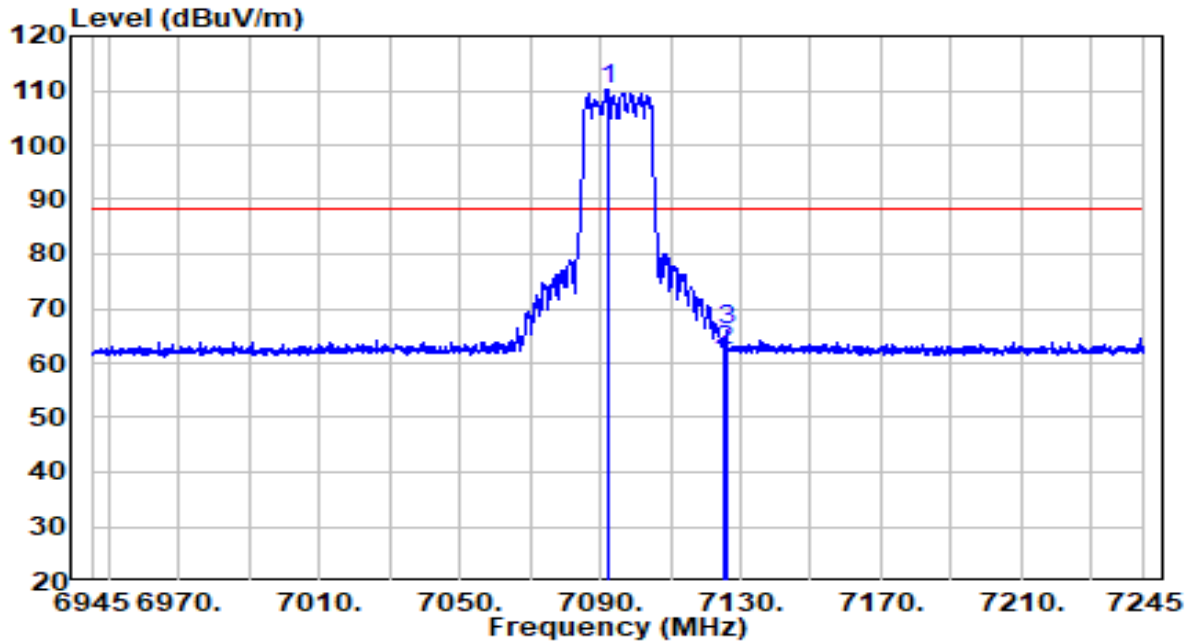


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7092.000	117.02	-6.76	110.26	N/A	N/A	Peak
2	7125.000	69.06	-6.68	62.38	-25.82	88.20	Peak
3	7126.200	72.53	-6.68	65.85	-22.35	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7095MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

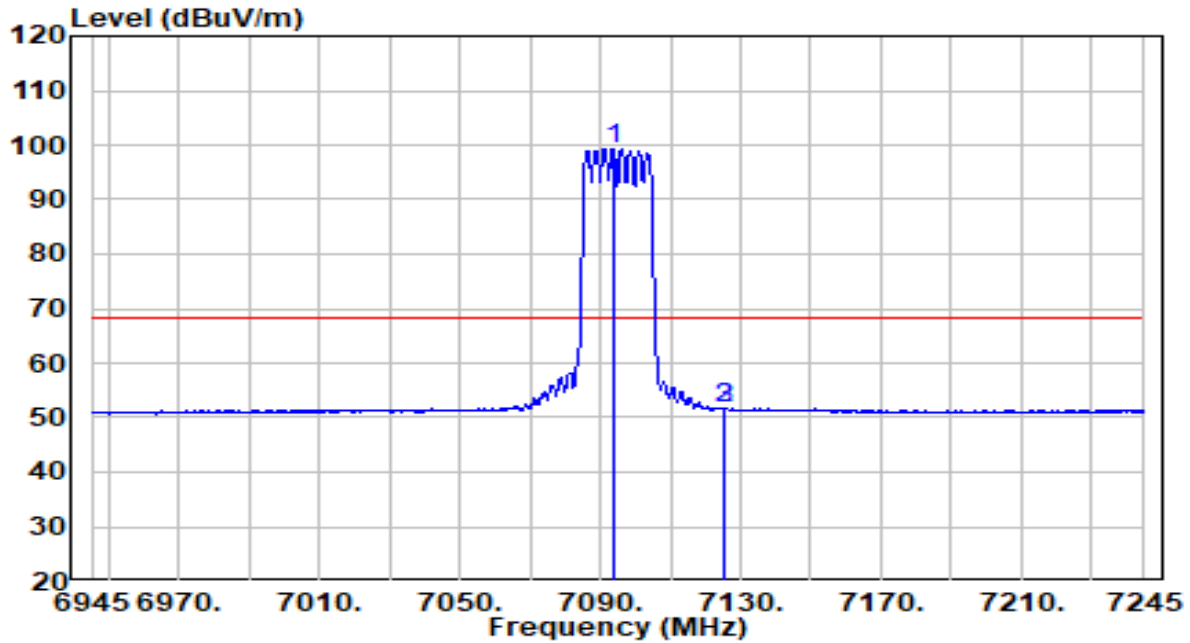


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7093.500	106.07	-6.75	99.32	N/A	N/A	Average
2	7125.000	58.28	-6.68	51.59	-16.61	68.20	Average
3	7125.450	58.45	-6.68	51.76	-16.44	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7095MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

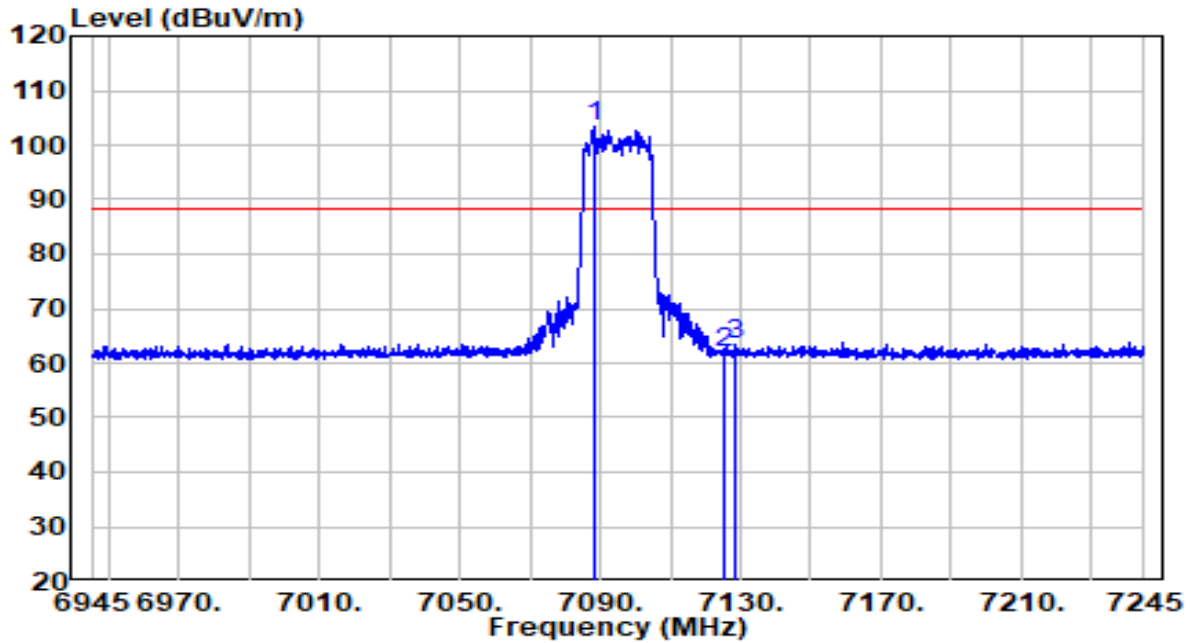


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7088.100	110.17	-6.78	103.39	N/A	N/A	Peak
2	7125.000	68.55	-6.68	61.87	-26.33	88.20	Peak
3	7128.300	69.93	-6.66	63.27	-24.93	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7095MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

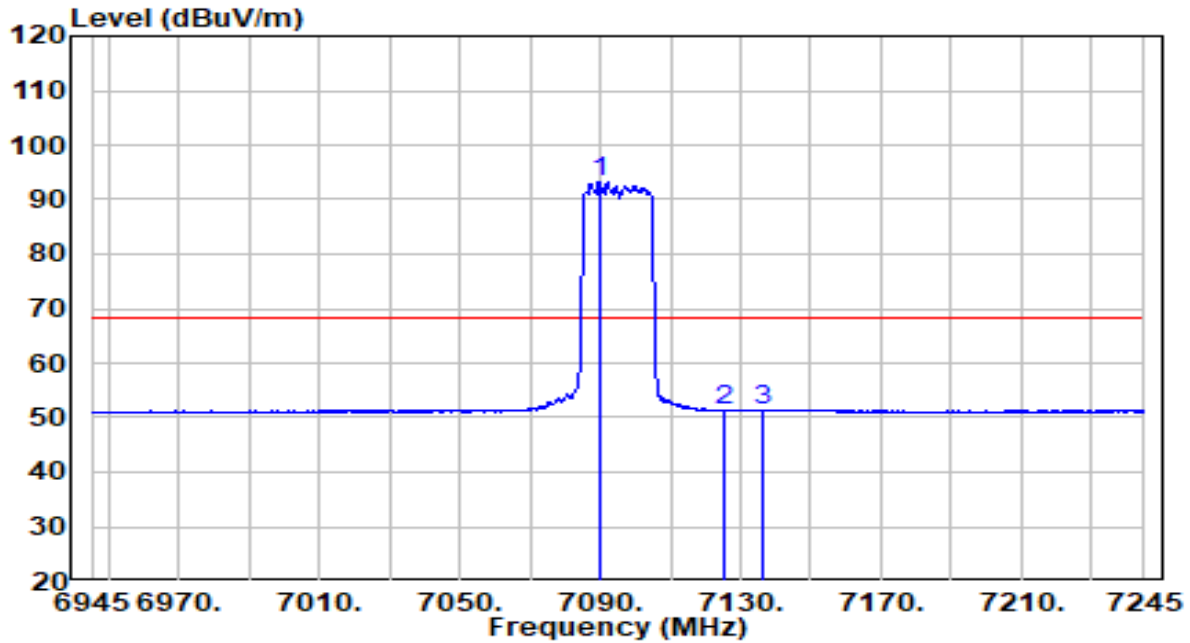


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7089.600	100.09	-6.77	93.32	N/A	N/A	Average
2	7125.000	57.99	-6.68	51.31	-16.89	68.20	Average
3	7136.250	58.10	-6.61	51.48	-16.72	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5965MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

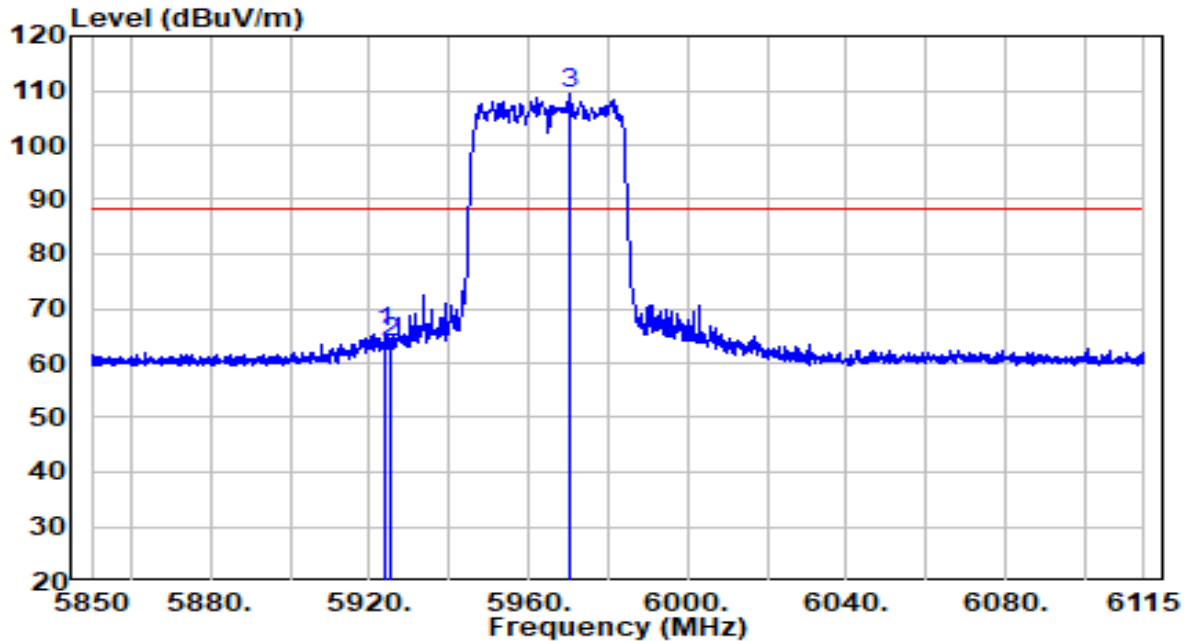


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5924.067	74.28	-8.59	65.69	-22.51	88.20	Peak
2	5925.000	72.38	-8.58	63.80	-24.40	88.20	Peak
3	* 5970.310	118.02	-8.65	109.37	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5965MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

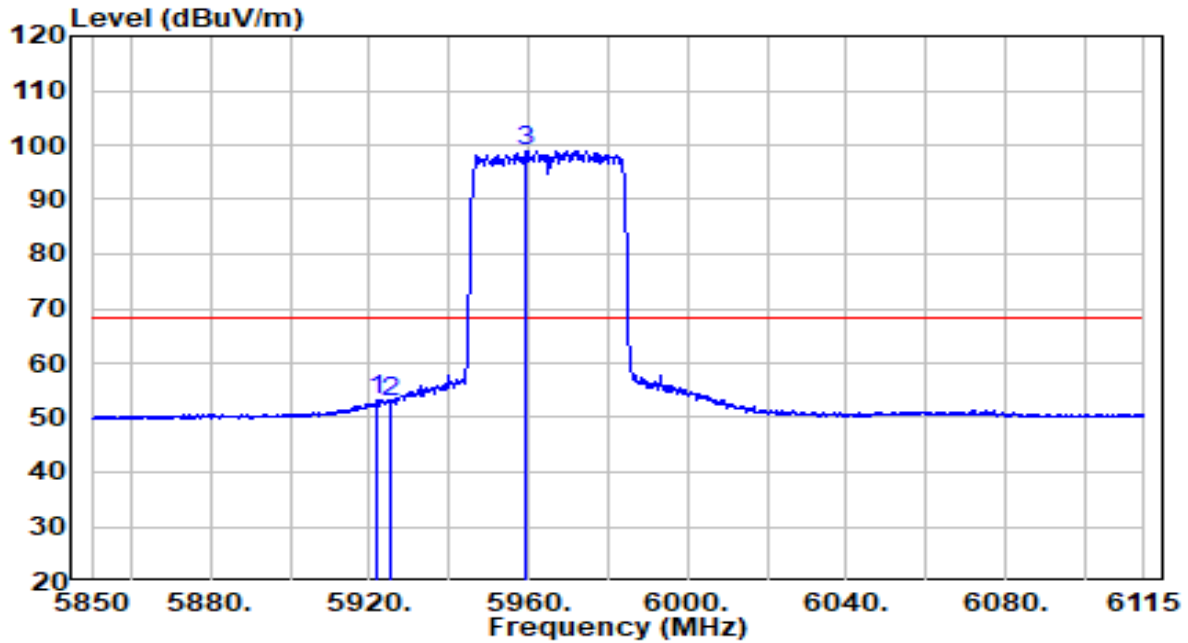


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5921.947	61.76	-8.59	53.17	-15.03	68.20	Average
2	5925.000	61.36	-8.58	52.78	-15.42	68.20	Average
3	* 5959.578	107.70	-8.65	99.05	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5965MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

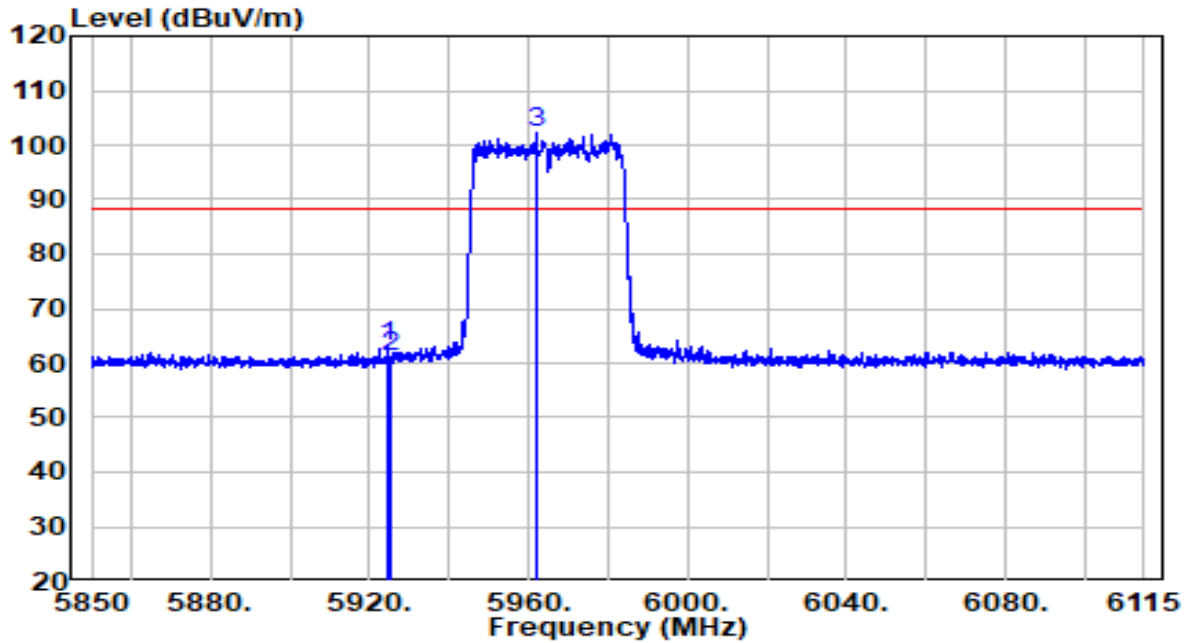


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5924.465	71.73	-8.58	63.15	-25.05	88.20	Peak
2	5925.000	69.80	-8.58	61.22	-26.98	88.20	Peak
3	* 5961.830	110.79	-8.65	102.14	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5965MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

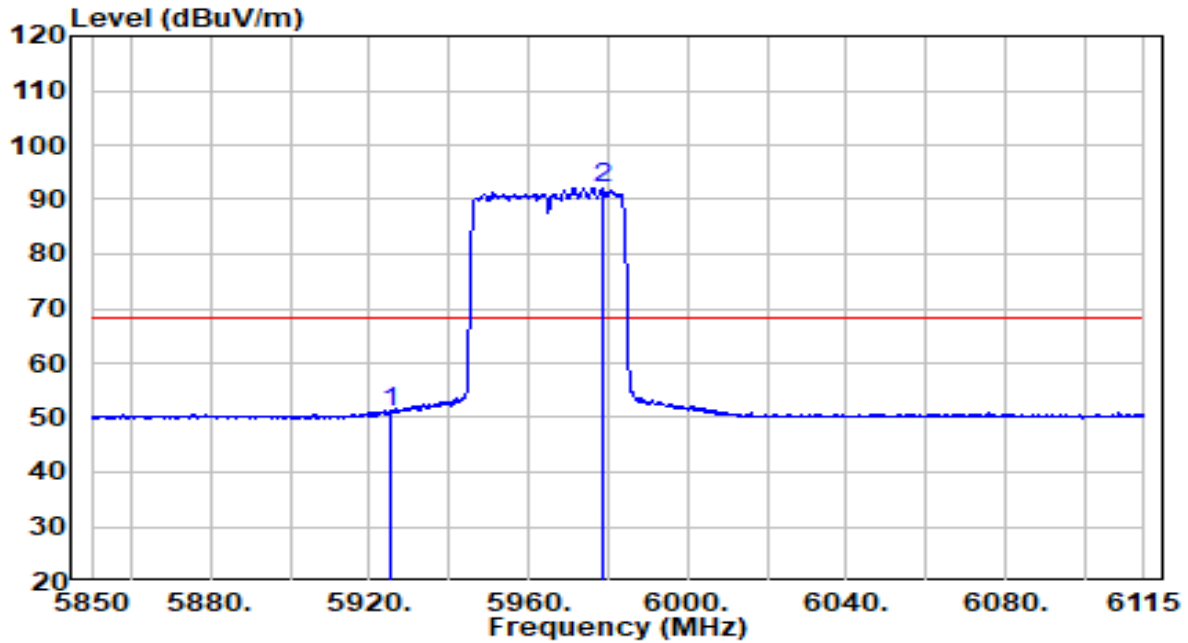


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5925.000	59.41	-8.58	50.83	-17.37	68.20	Average
2	* 5978.525	100.58	-8.64	91.94	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7085MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

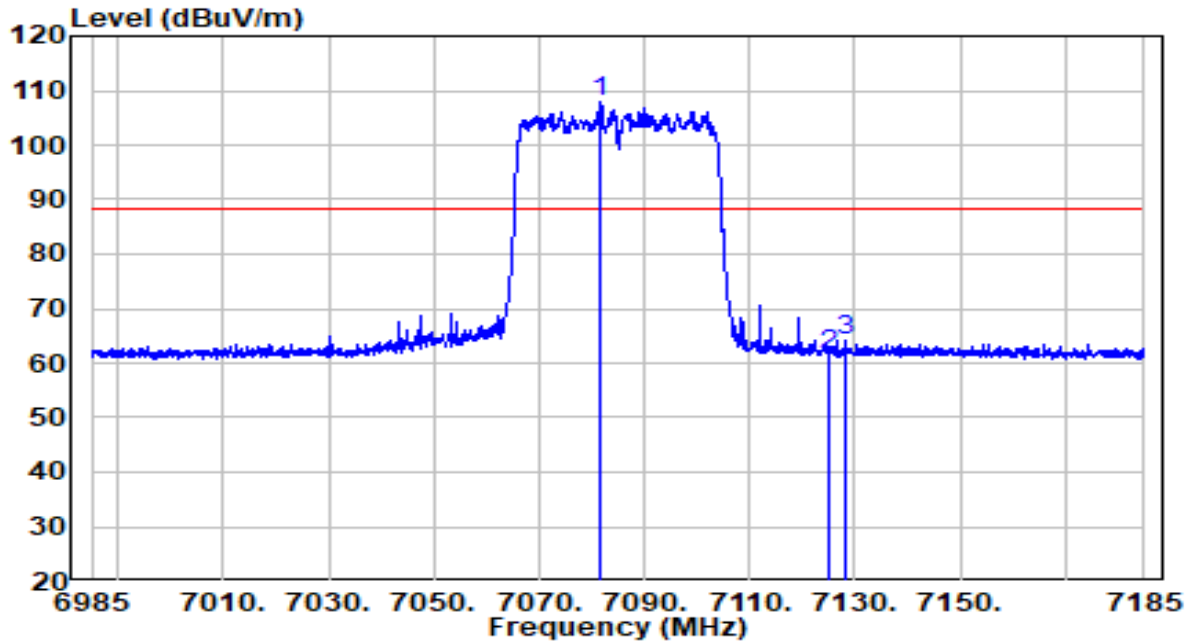


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 7081.800	114.54	-6.79	107.75	N/A	N/A	Peak
2	7125.000	68.36	-6.68	61.68	-26.52	88.20	Peak
3	7128.300	70.82	-6.66	64.16	-24.04	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7085MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

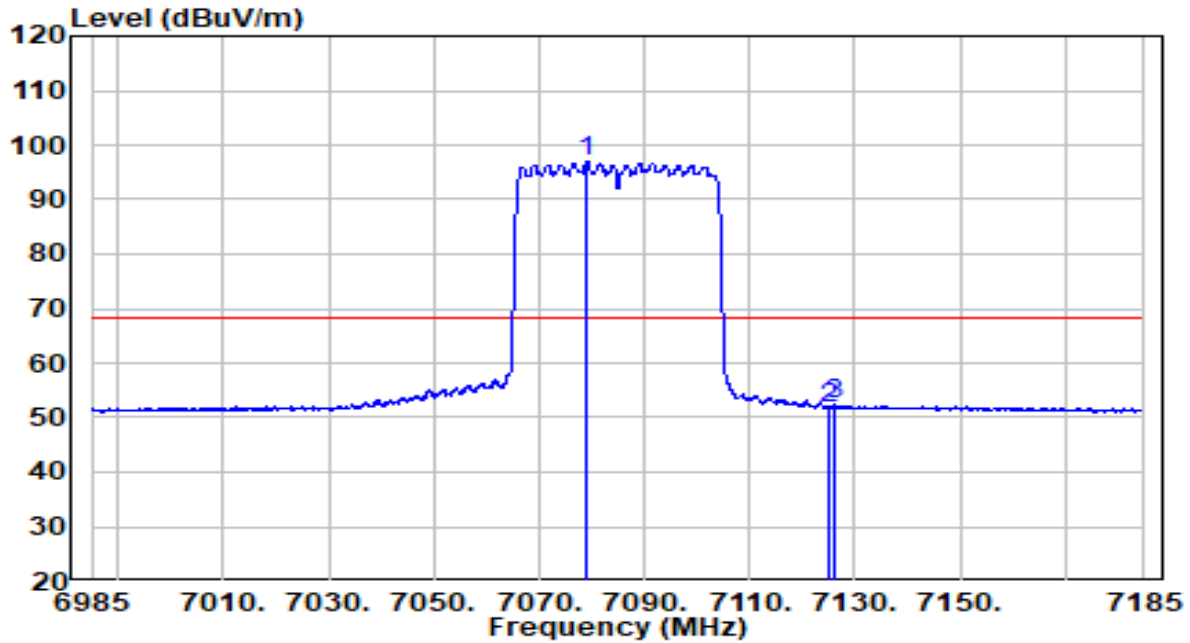


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7079.200	103.64	-6.80	96.84	N/A	N/A	Average
2	7125.000	58.52	-6.68	51.84	-16.36	68.20	Average
3	7126.200	59.01	-6.68	52.33	-15.87	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7085MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

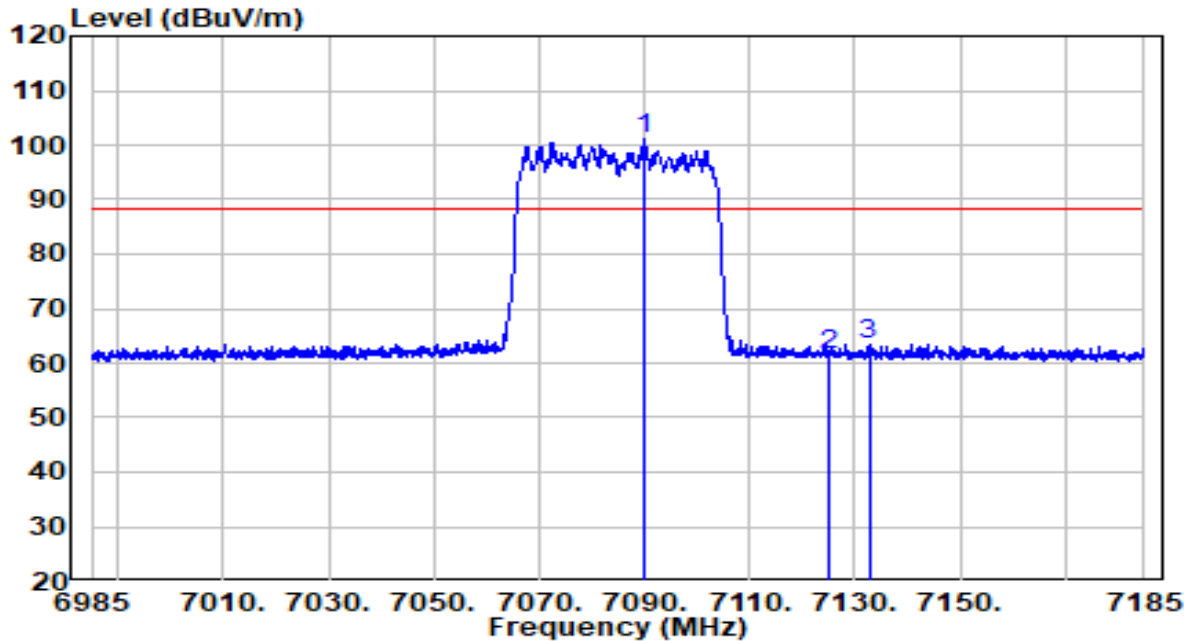


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7090.200	108.06	-6.77	101.29	N/A	N/A	Peak
2	7125.000	68.16	-6.68	61.47	-26.73	88.20	Peak
3	7132.700	70.05	-6.64	63.41	-24.79	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7085MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

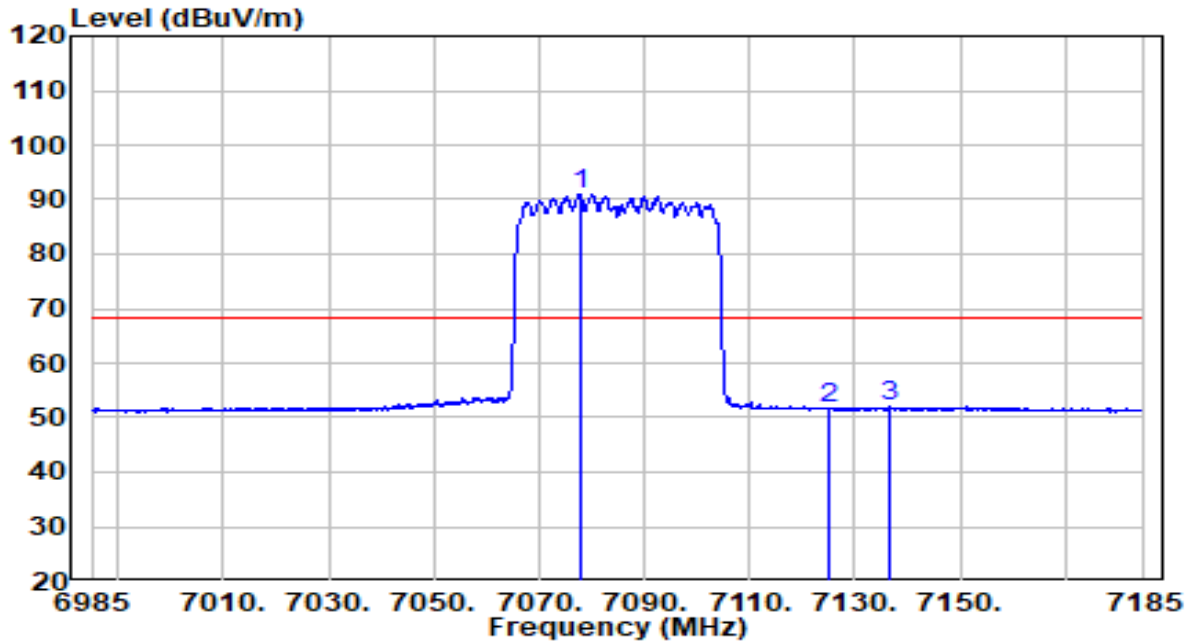


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7077.700	97.81	-6.80	91.01	N/A	N/A	Average
2	7125.000	58.35	-6.68	51.66	-16.54	68.20	Average
3	7136.800	58.52	-6.61	51.91	-16.29	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5985MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

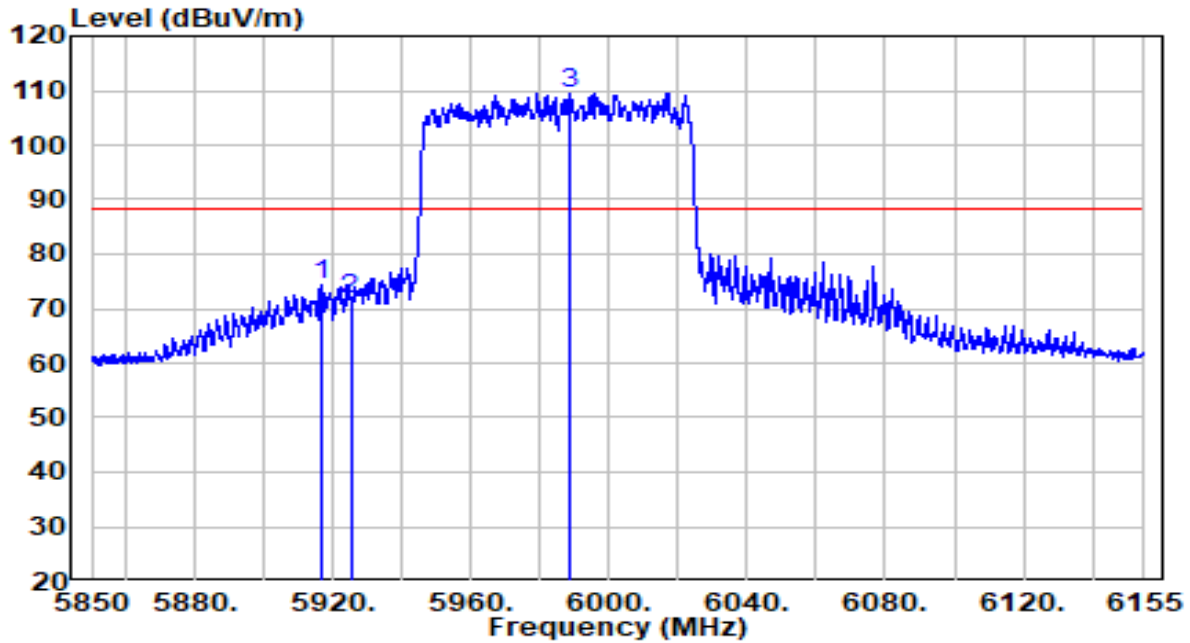


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5916.795	83.03	-8.62	74.41	-13.79	88.20	Peak
2	5925.000	80.17	-8.58	71.59	-16.61	88.20	Peak
3	* 5988.470	118.22	-8.63	109.59	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5985MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

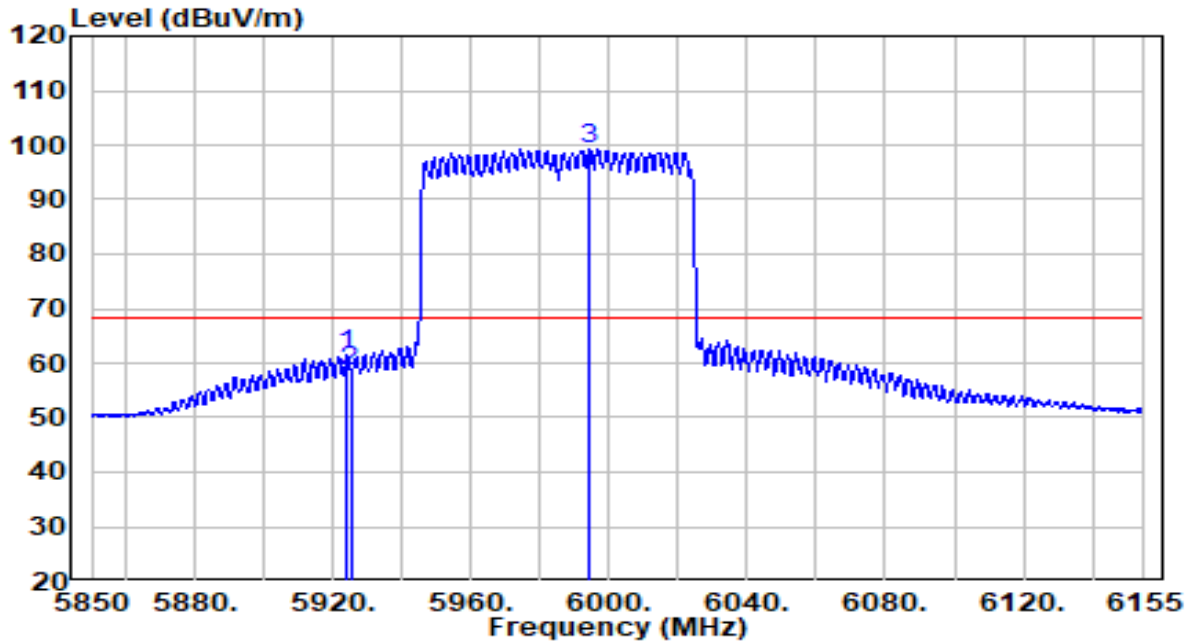


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5924.115	69.97	-8.59	61.38	-6.82	68.20	Average
2	5925.000	67.01	-8.58	58.43	-9.77	68.20	Average
3	* 5994.265	107.76	-8.63	99.13	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5985MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

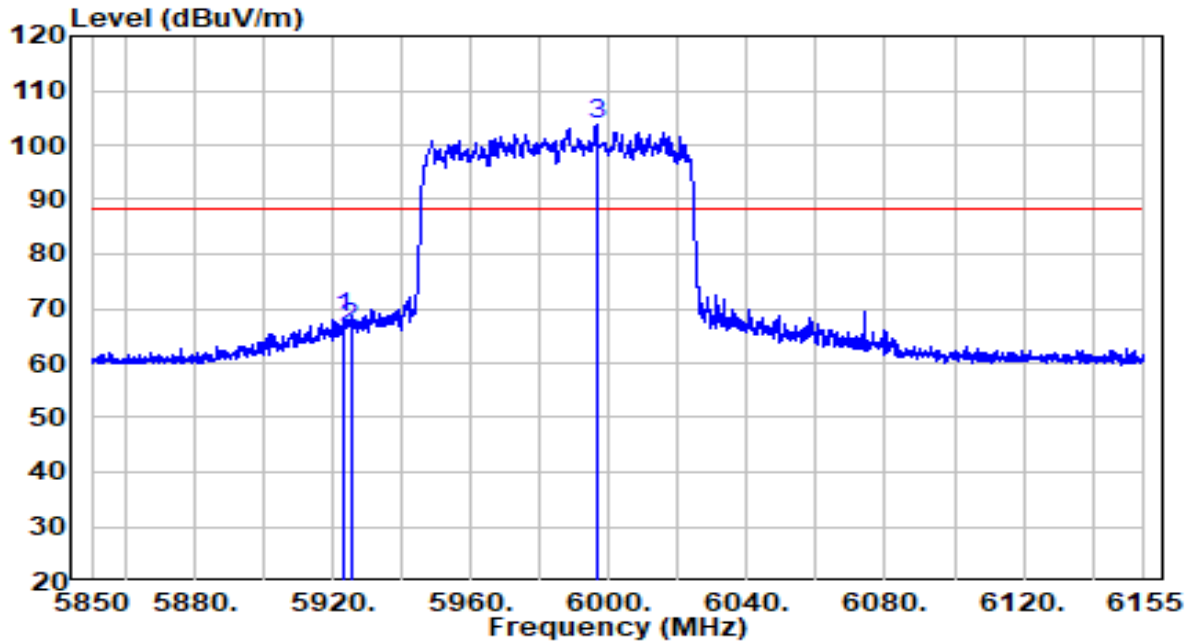


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5923.353	76.82	-8.59	68.23	-19.97	88.20	Peak
2	5925.000	74.97	-8.58	66.39	-21.81	88.20	Peak
3	* 5996.248	112.45	-8.63	103.82	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5985MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

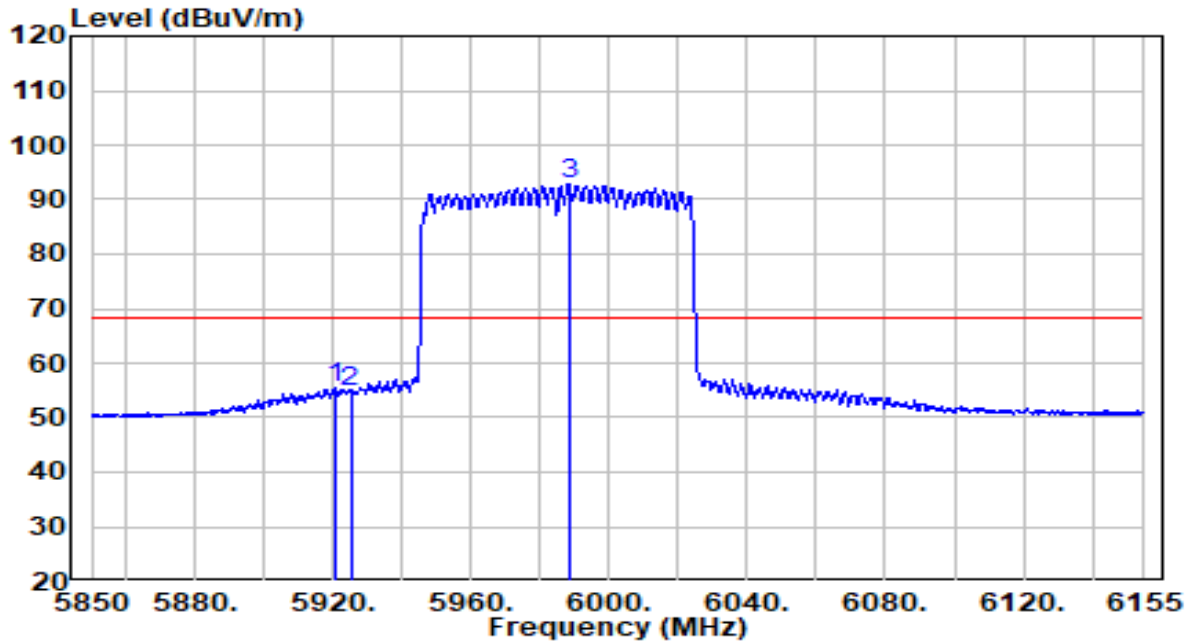


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5920.455	64.07	-8.60	55.47	-12.73	68.20	Average
2	5925.000	63.45	-8.58	54.86	-13.34	68.20	Average
3	* 5988.165	101.32	-8.63	92.69	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7025MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

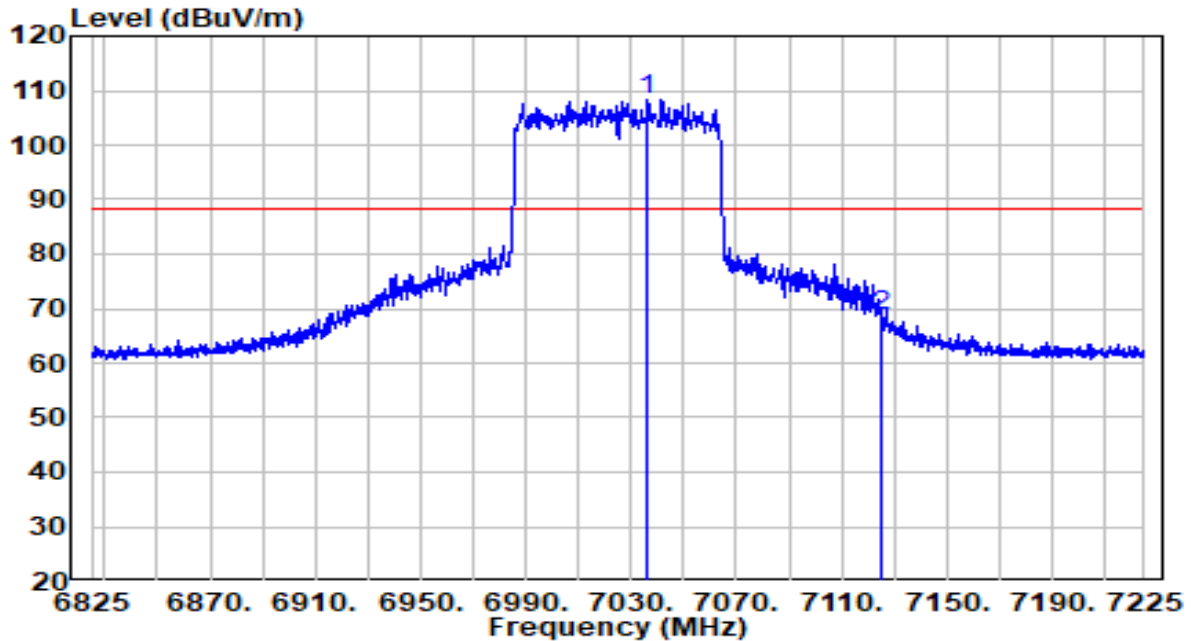


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	7036.400	115.23	-6.87	108.36	N/A	N/A	Peak
2		7125.000	75.30	-6.68	68.62	-19.58	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7025MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

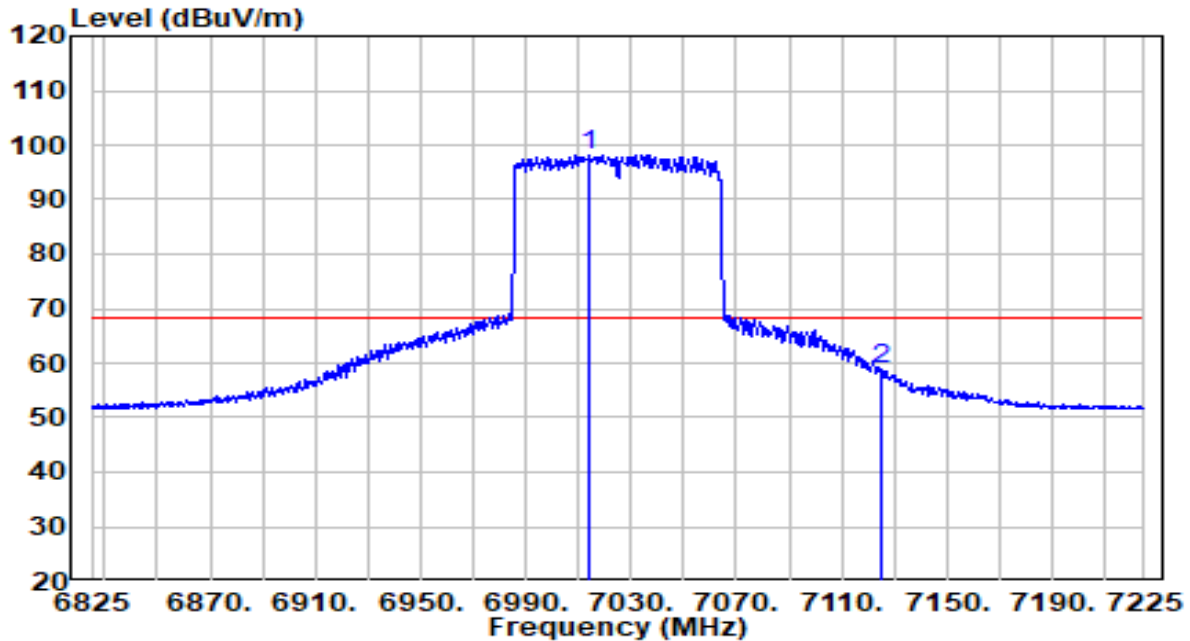


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7014.200	105.14	-6.89	98.25	N/A	N/A	Average
2	7125.000	65.41	-6.68	58.73	-9.47	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7025MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

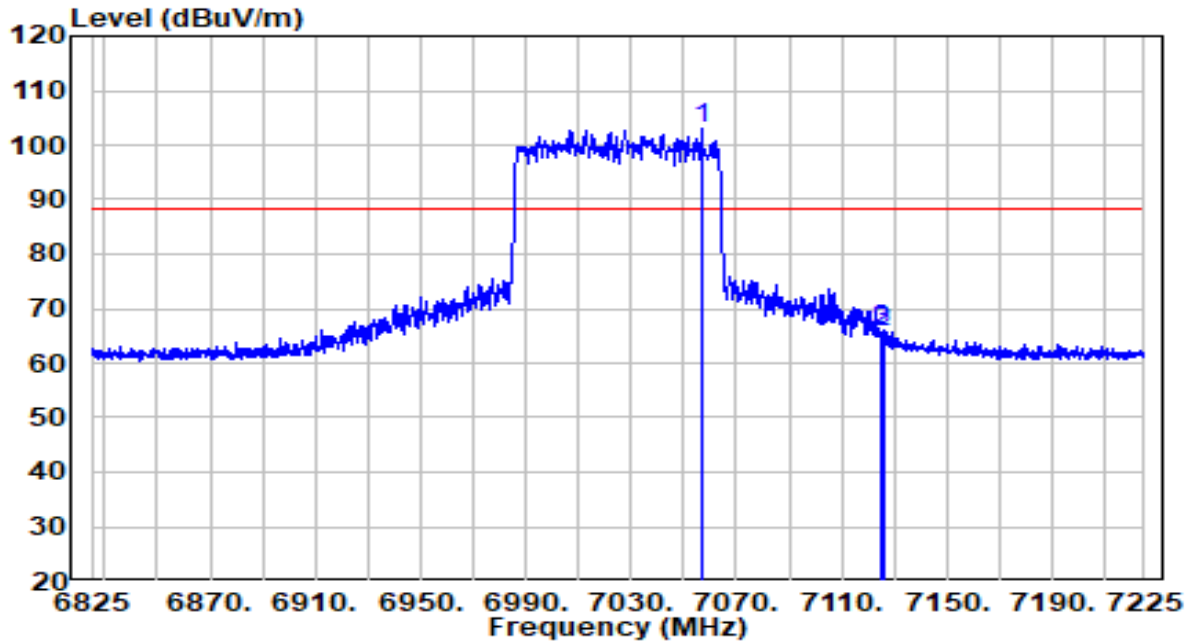


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7057.000	109.80	-6.83	102.97	N/A	N/A	Peak
2	7125.000	72.33	-6.68	65.65	-22.55	88.20	Peak
3	7125.600	72.84	-6.68	66.16	-22.04	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7025MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

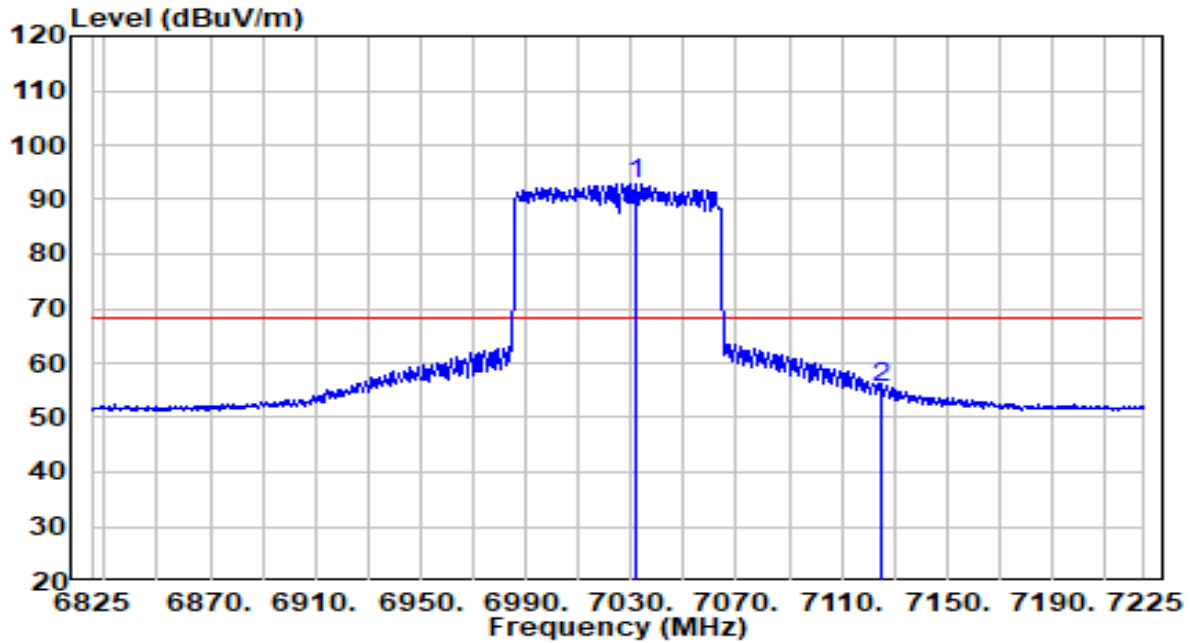


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7031.800	99.75	-6.87	92.88	N/A	N/A	Average
2	7125.000	62.11	-6.68	55.42	-12.78	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6025MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

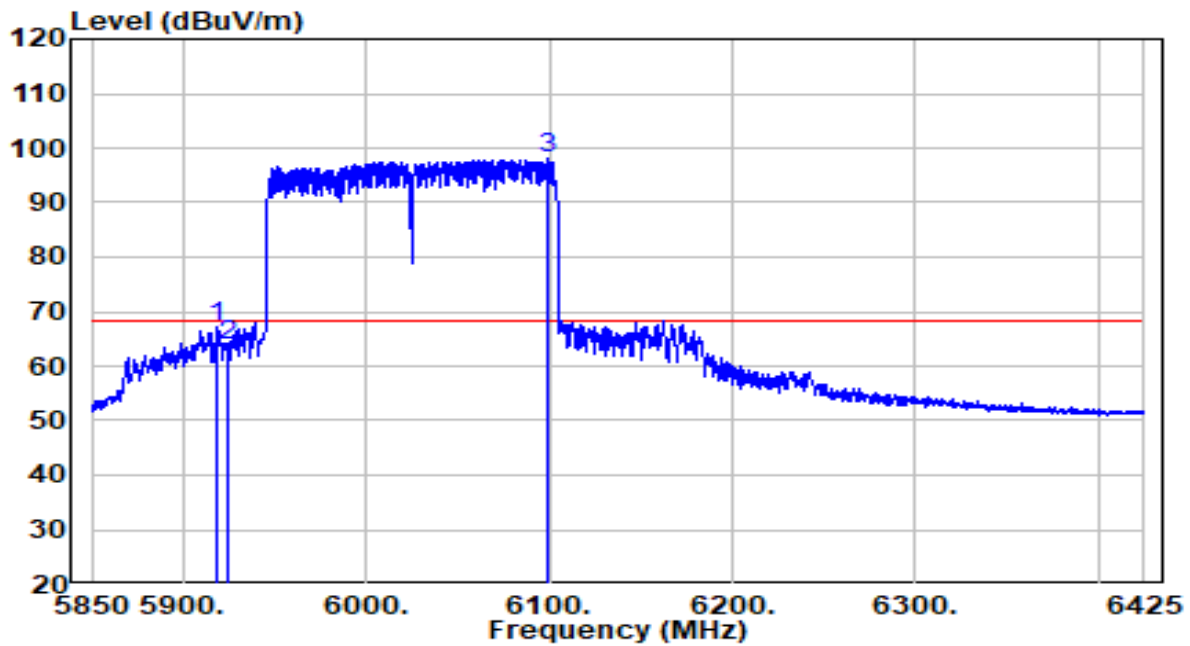


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5919.000	75.82	-8.61	67.21	-0.99	68.20	Average
2	5925.038	72.51	-8.58	63.93	-4.27	68.20	Average
3	* 6098.975	106.71	-8.45	98.26	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6025MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

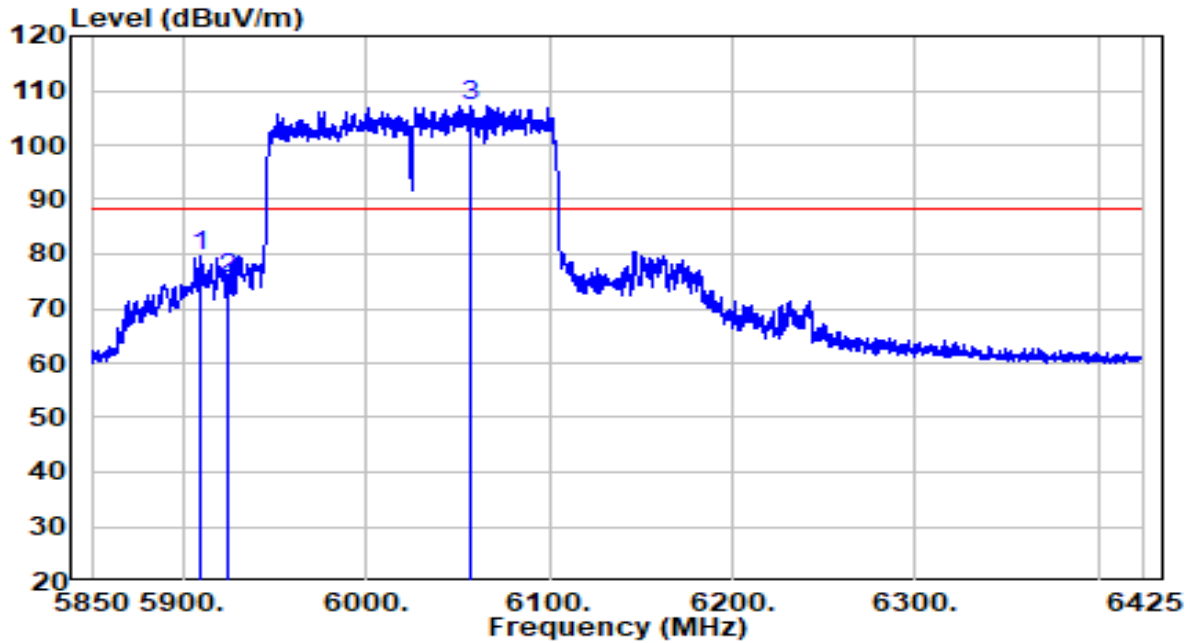


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5909.513	88.19	-8.64	79.55	-8.65	88.20	Peak
2	5925.000	83.94	-8.58	75.35	-12.85	88.20	Peak
3	* 6056.712	115.82	-8.50	107.32	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6025MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

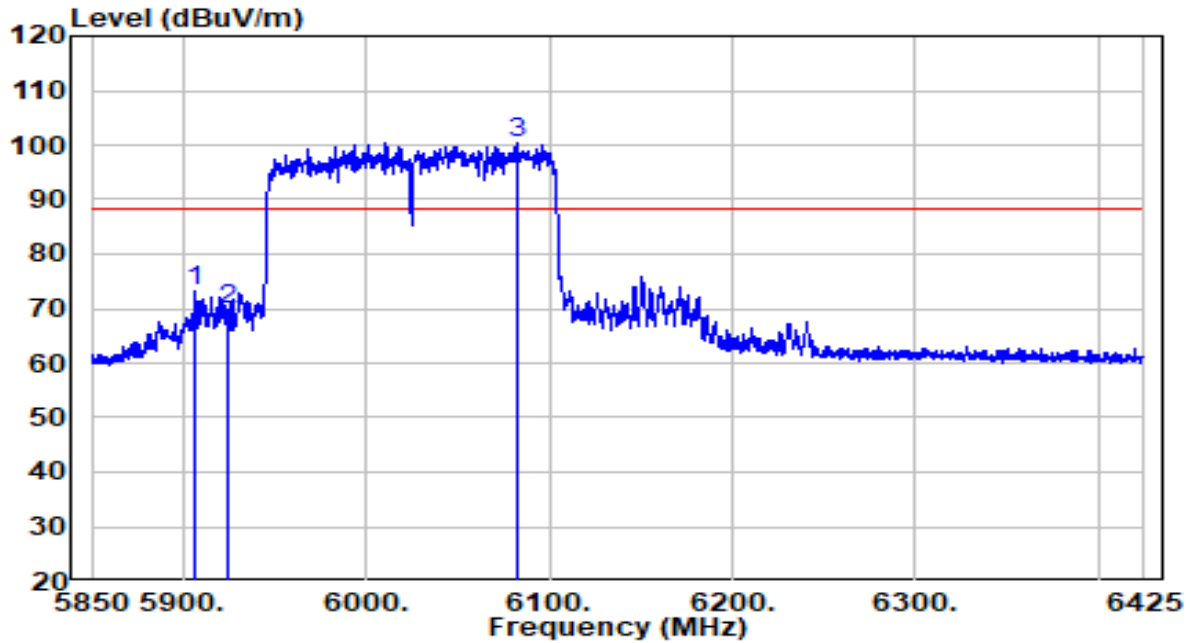


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5906.638	81.91	-8.64	73.27	-14.93	88.20	Peak
2	5925.000	78.43	-8.58	69.85	-18.35	88.20	Peak
3	* 6082.587	108.85	-8.44	100.41	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6025MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

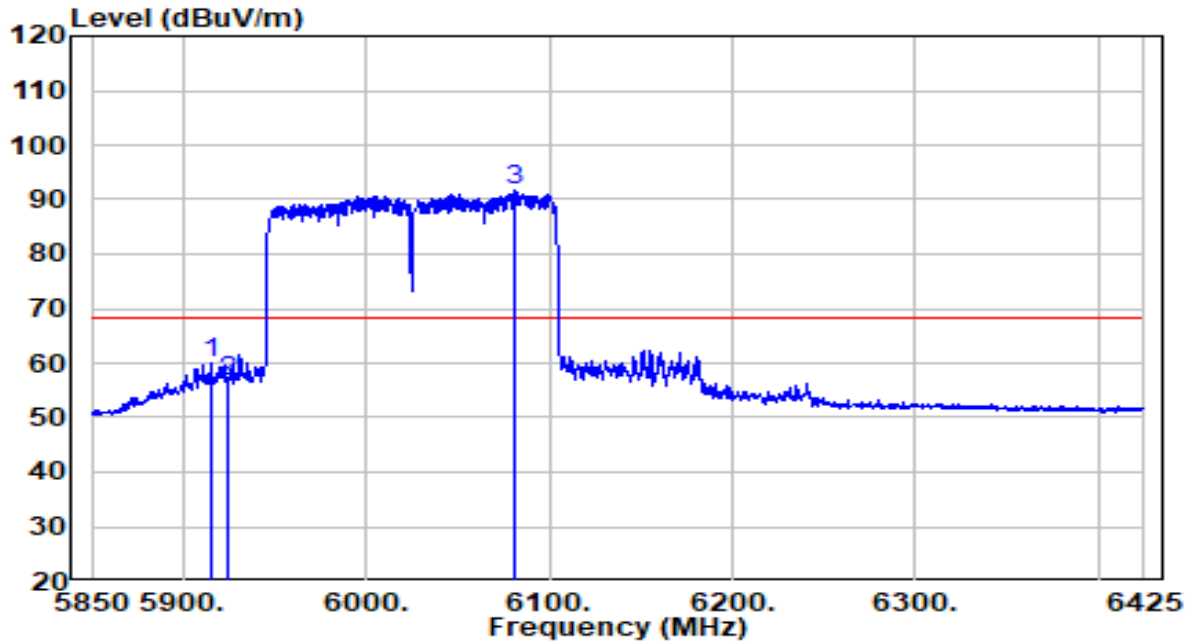


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5915.263	68.81	-8.62	60.18	-8.02	68.20	Average
2	5925.000	65.37	-8.58	56.78	-11.42	68.20	Average
3	* 6080.575	100.03	-8.44	91.59	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6985MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

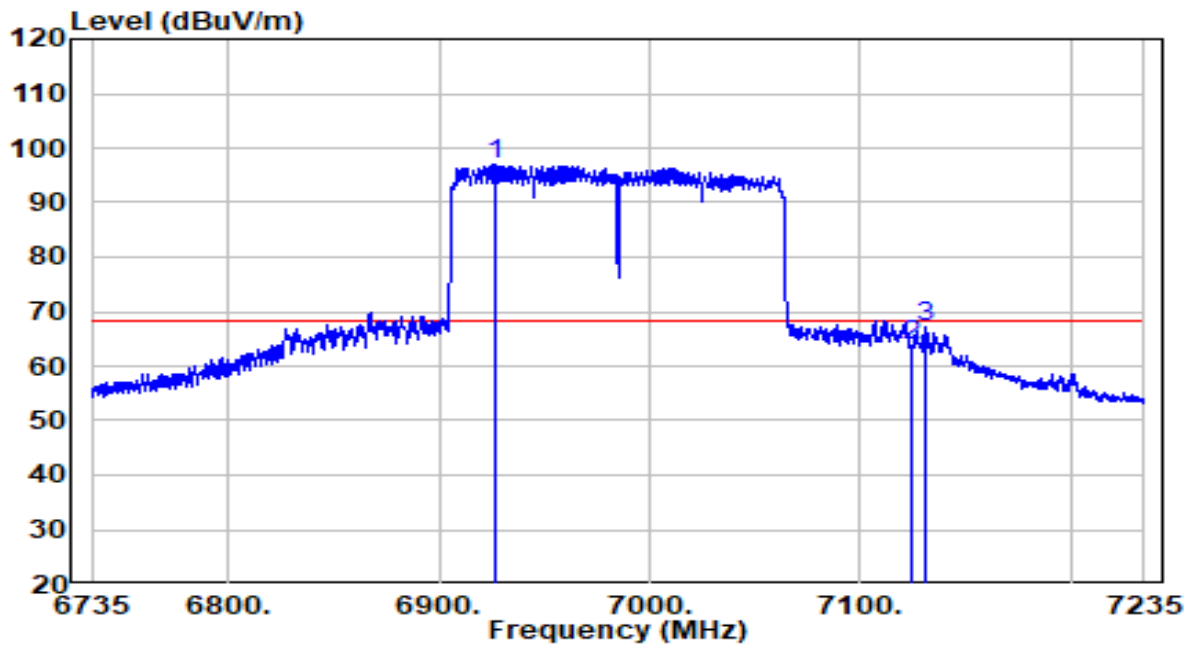


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	103.81	-6.98	96.83	N/A	N/A	Average
2		70.39	-6.68	63.70	-4.50	68.20	Average
3		73.80	-6.64	67.16	-1.04	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6985MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

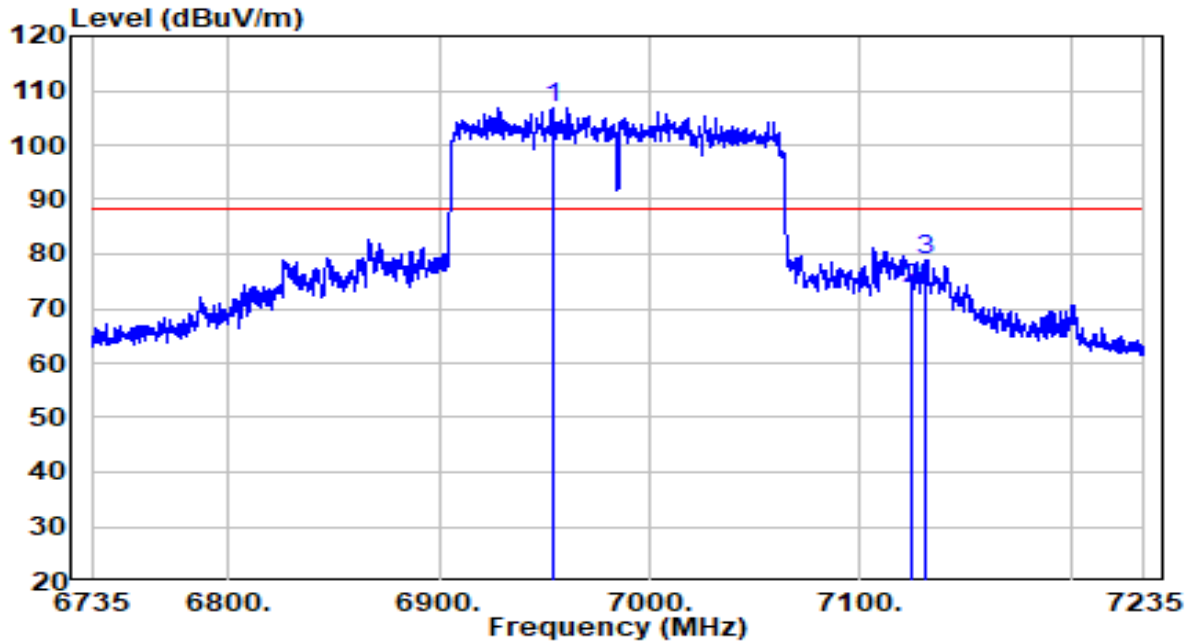


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 6953.750	113.82	-7.00	106.82	N/A	N/A	Peak
2	7125.000	80.22	-6.68	73.54	-14.66	88.20	Peak
3	7131.000	85.70	-6.65	79.06	-9.14	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6985MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

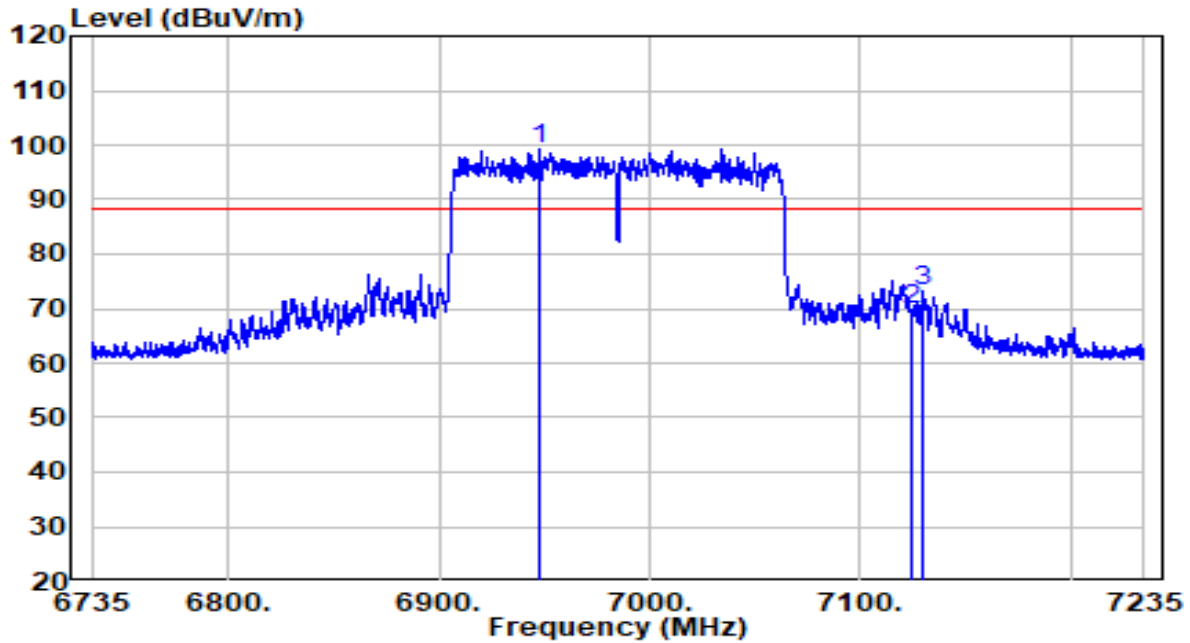


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 6947.750	106.17	-6.99	99.18	N/A	N/A	Peak
2	7125.000	76.62	-6.68	69.94	-18.26	88.20	Peak
3	7129.500	79.92	-6.66	73.27	-14.93	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6985MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

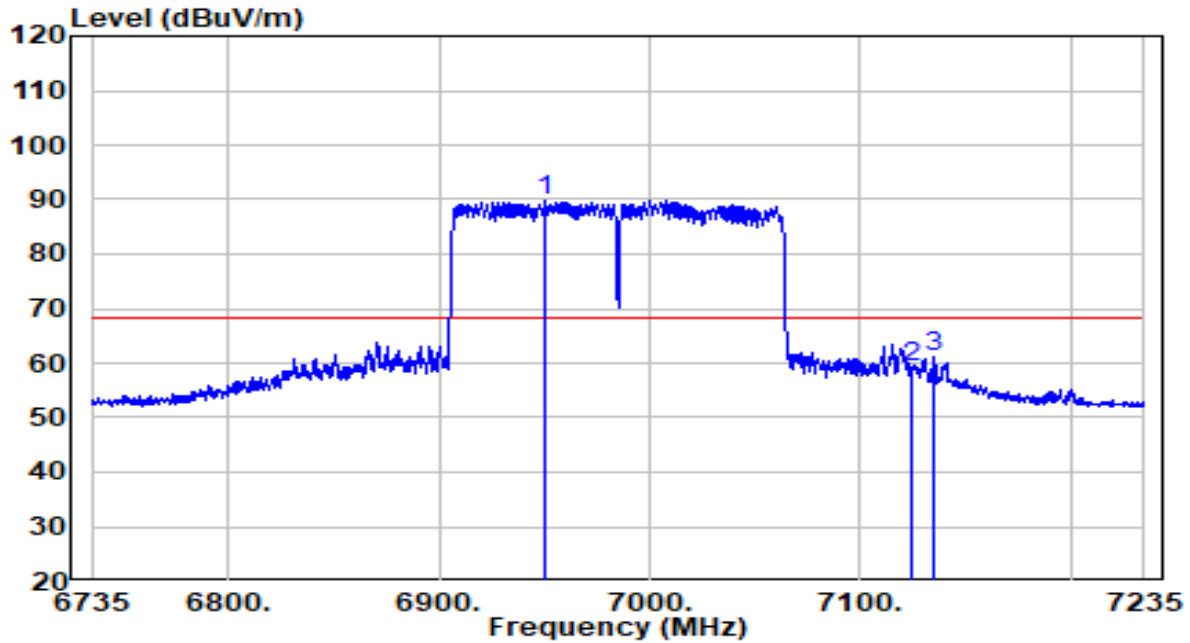


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 6950.250	96.76	-7.00	89.76	N/A	68.20	Average
2	7125.000	66.04	-6.68	59.36	-8.84	68.20	Average
3	7135.500	67.68	-6.62	61.06	-7.14	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

**Akoustic Filter N<sub>ss</sub>=2**

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5955MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

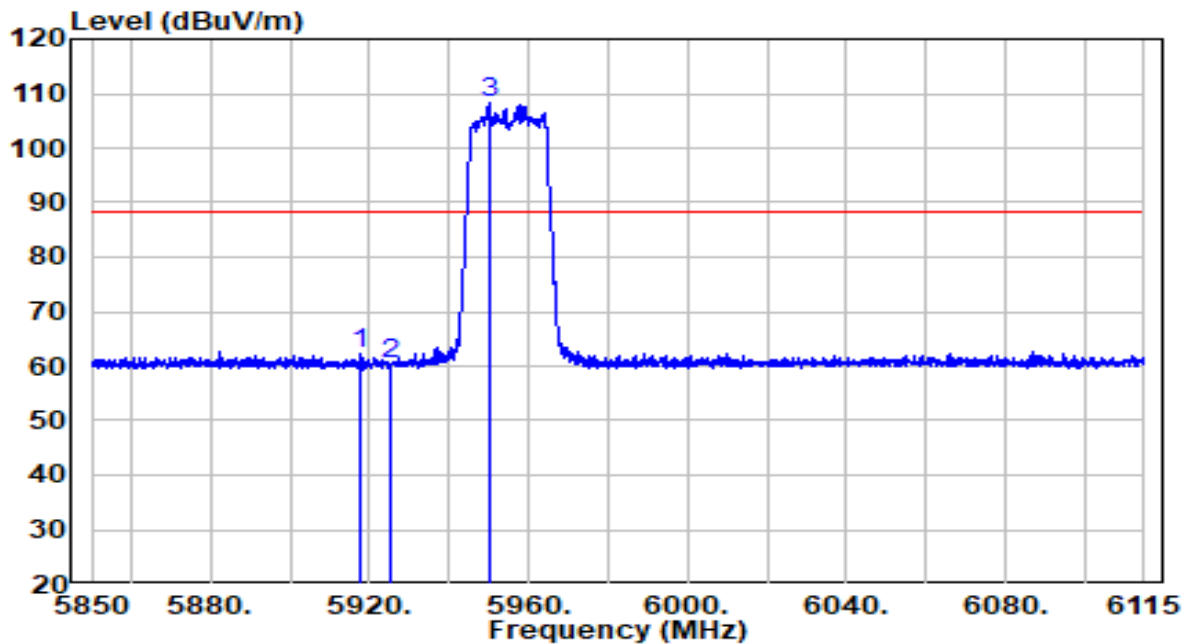


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5917.442	70.78	-8.62	62.17	-26.03	88.20	Peak
2	5925.000	68.97	-8.58	60.39	-27.81	88.20	Peak
3	* 5950.303	116.82	-8.63	108.19	N/A	N/A	Peak

**Note:**

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5955MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

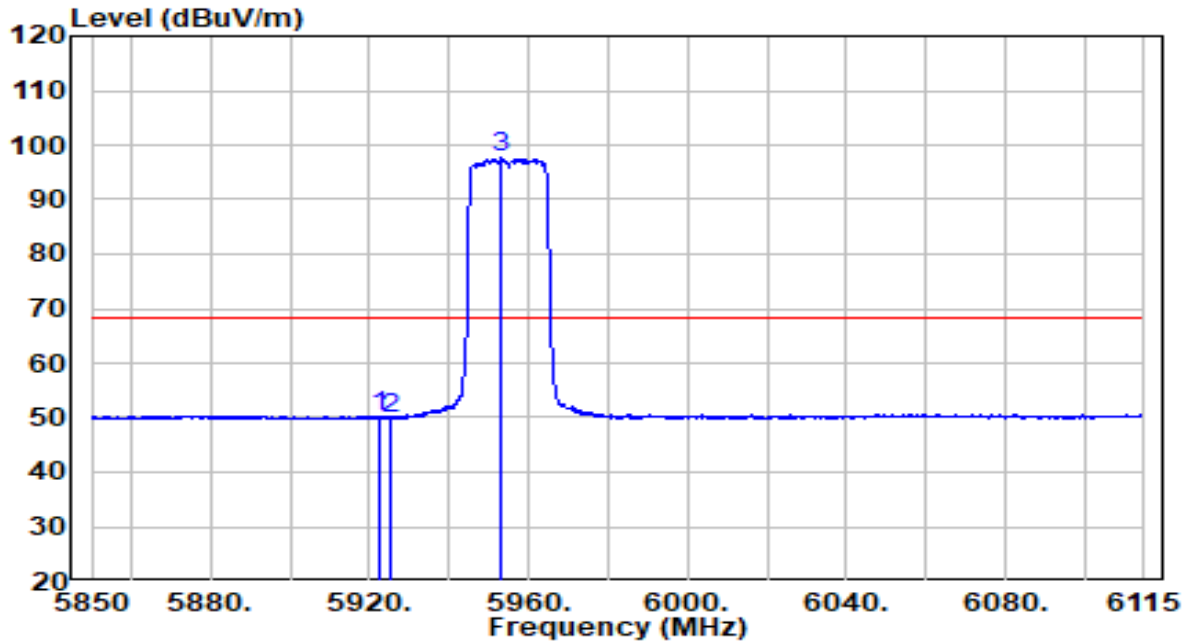


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5922.478	58.88	-8.59	50.28	-17.92	68.20	Average
2	5925.000	58.48	-8.58	49.90	-18.30	68.20	Average
3	* 5953.085	106.21	-8.64	97.57	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5955MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

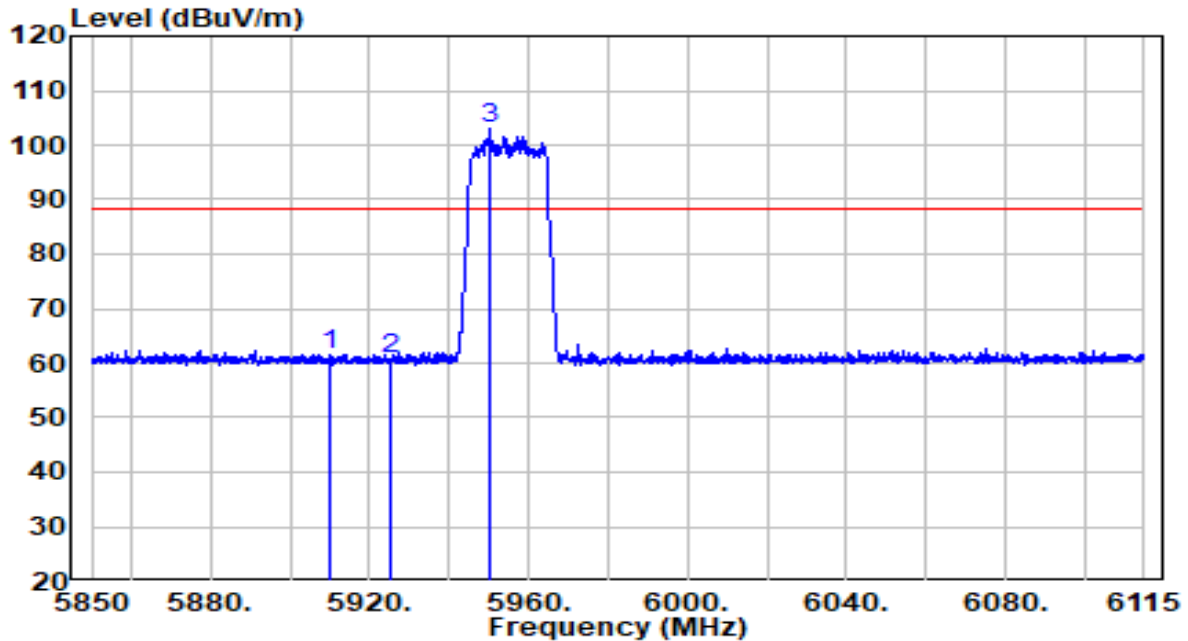


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5909.890	70.28	-8.64	61.64	-26.56	88.20	Peak
2	5925.000	69.26	-8.58	60.68	-27.52	88.20	Peak
3	* 5950.038	111.59	-8.63	102.96	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5955MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

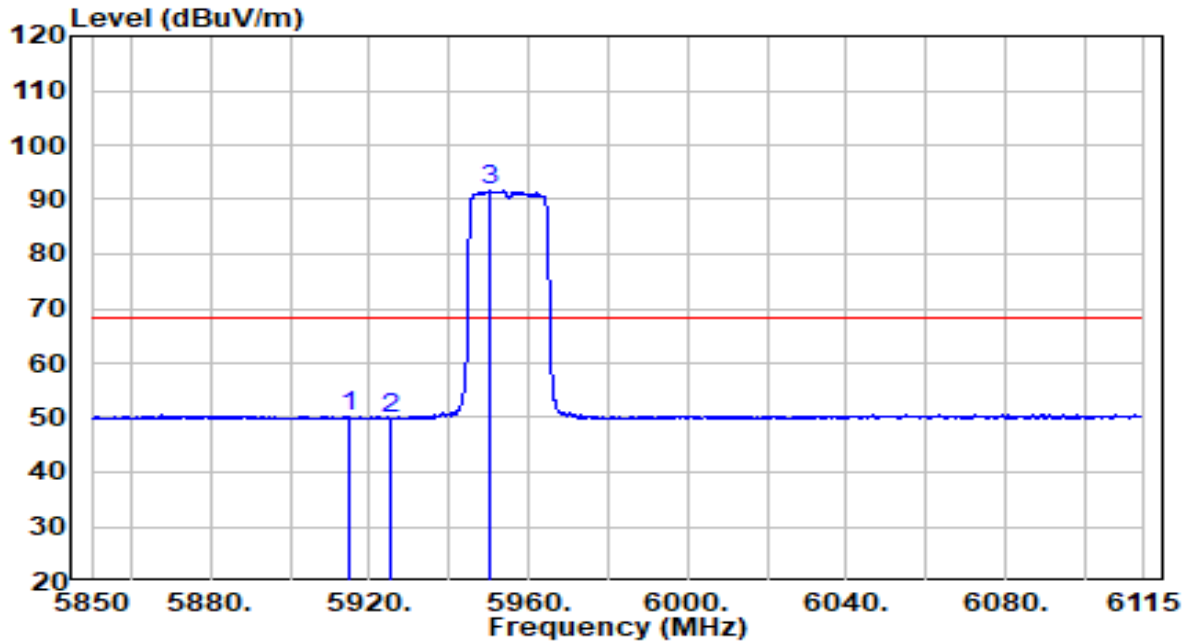


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5914.925	58.85	-8.63	50.23	-17.97	68.20	Average
2	5925.000	58.56	-8.58	49.97	-18.23	68.20	Average
3	* 5950.038	100.30	-8.63	91.67	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7095MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

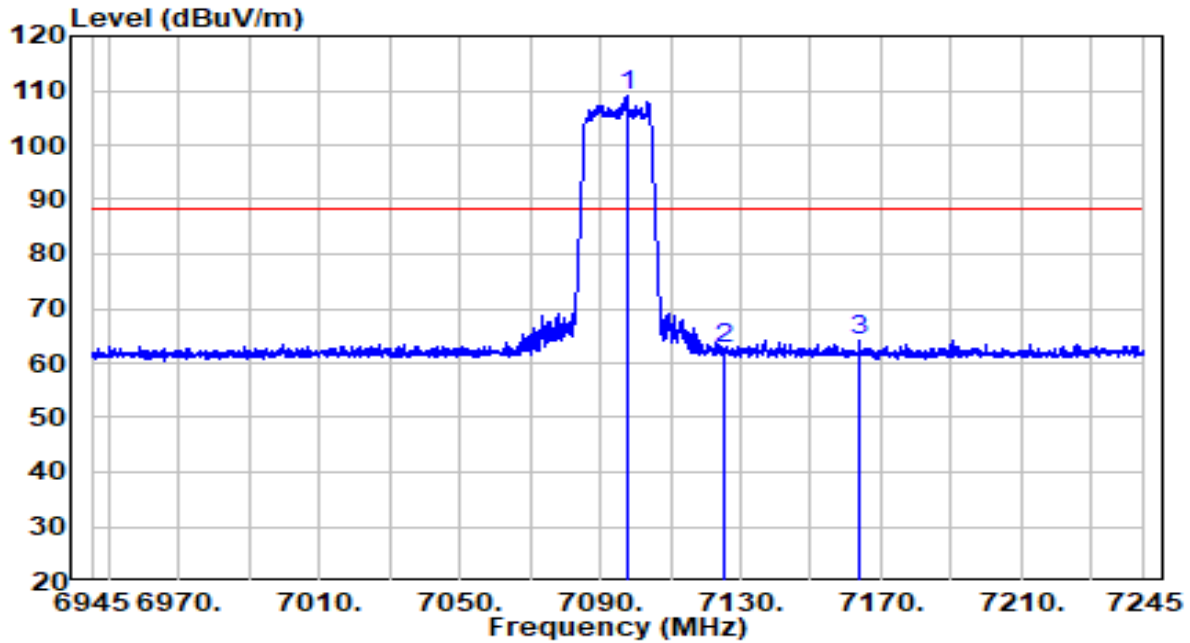


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7097.700	115.81	-6.74	109.07	N/A	N/A	Peak
2	7125.000	69.29	-6.68	62.60	-25.60	88.20	Peak
3	7163.700	70.94	-6.68	64.26	-23.94	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7095MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

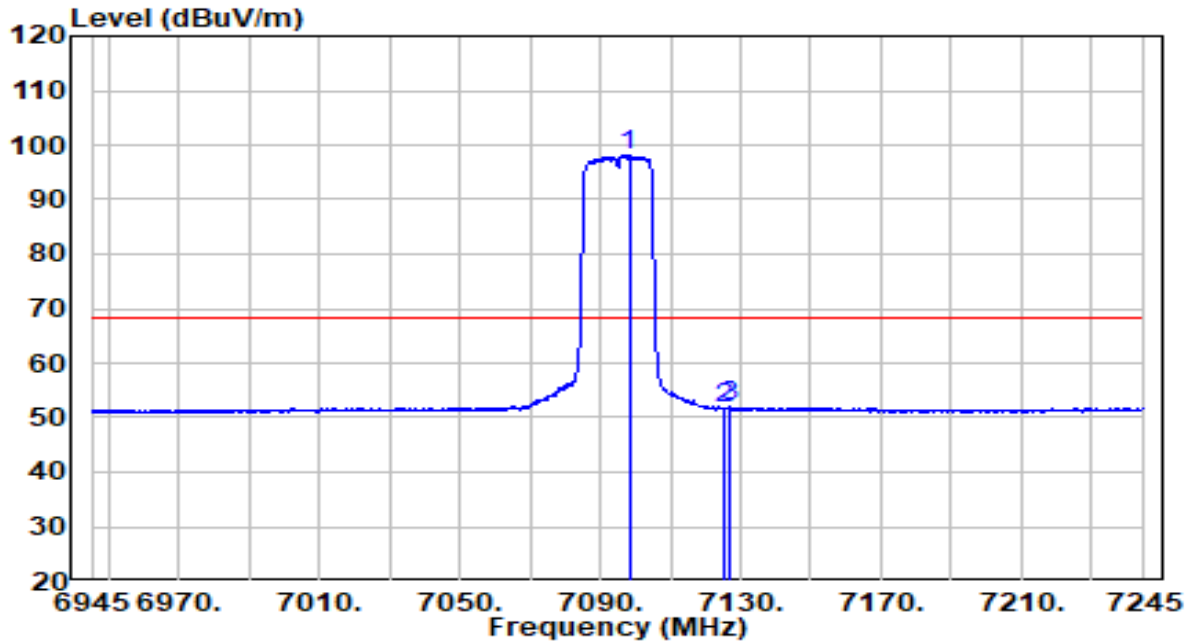


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7098.150	104.79	-6.73	98.06	N/A	N/A	Average
2	7125.000	58.43	-6.68	51.74	-16.46	68.20	Average
3	7126.950	58.64	-6.67	51.97	-16.23	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7095MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

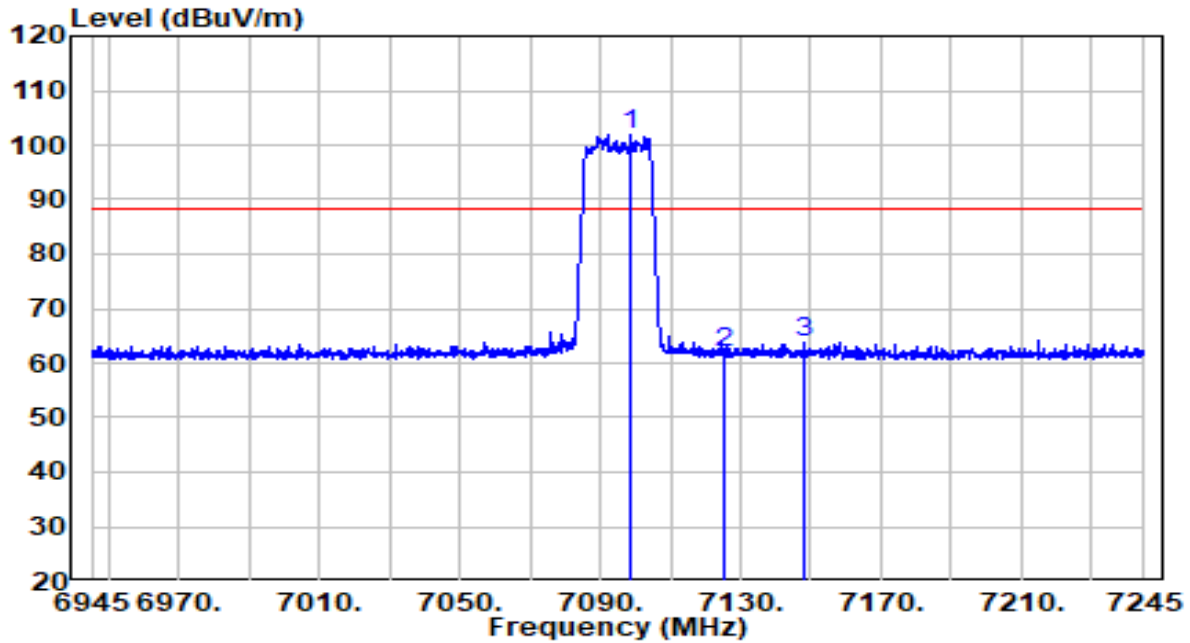


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7098.900	108.48	-6.73	101.75	N/A	N/A	Peak
2	7125.000	68.63	-6.68	61.95	-26.25	88.20	Peak
3	7148.250	70.32	-6.59	63.73	-24.47	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7095MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

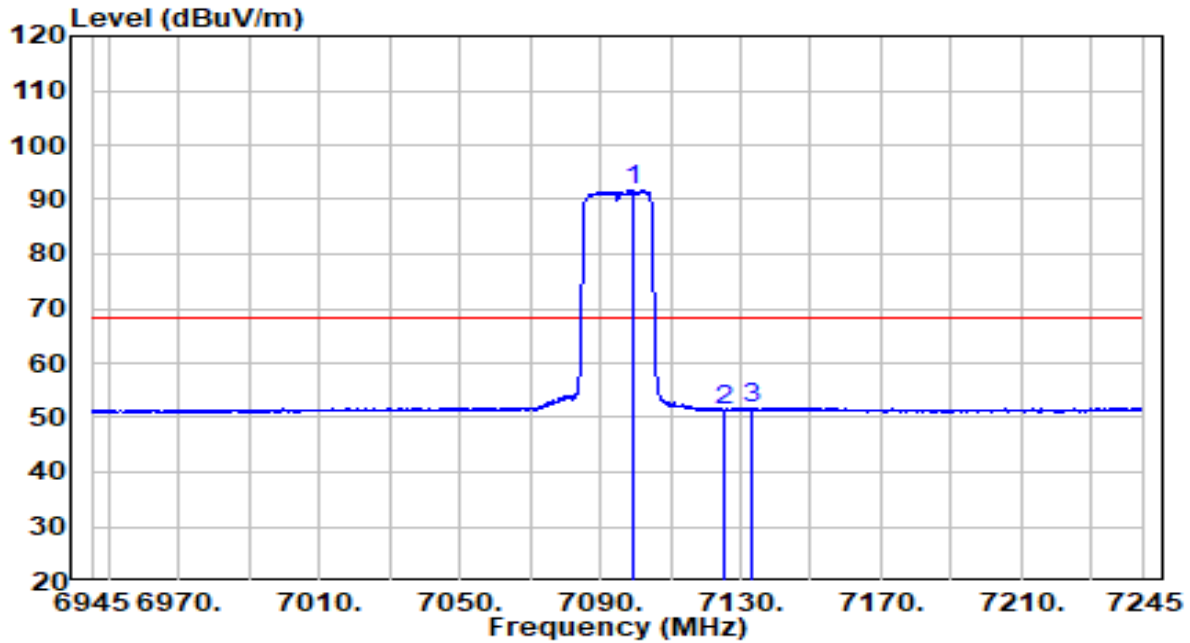


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7099.350	98.44	-6.73	91.71	N/A	N/A	Average
2	7125.000	58.12	-6.68	51.44	-16.76	68.20	Average
3	7133.400	58.46	-6.63	51.83	-16.37	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5965MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

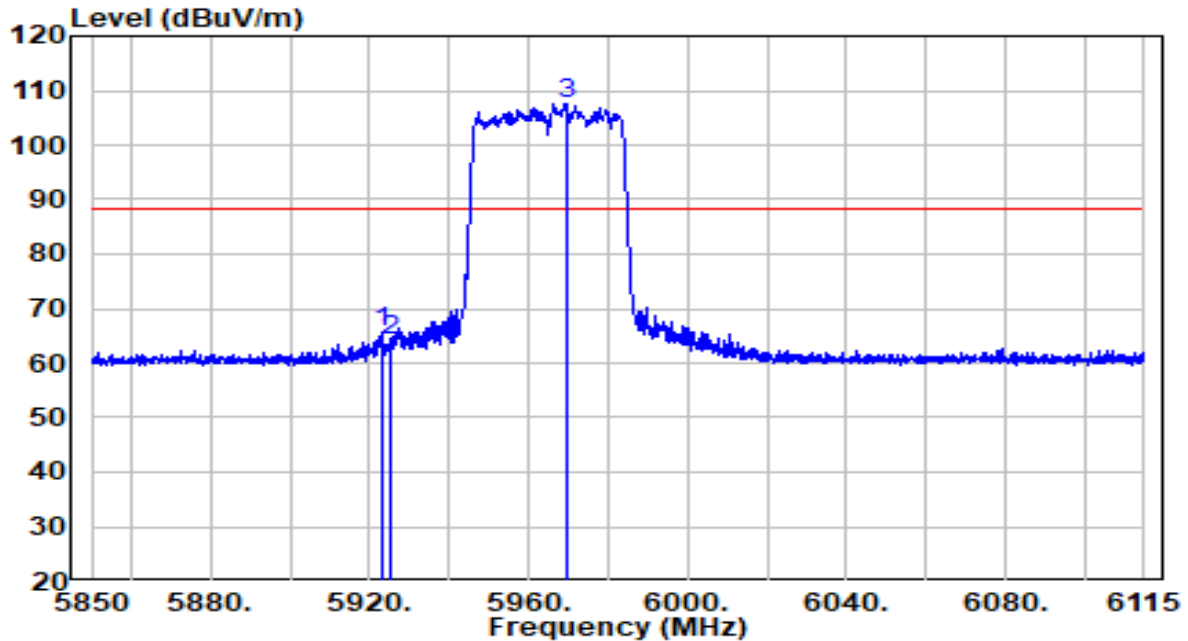


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5923.272	74.16	-8.59	65.58	-22.62	88.20	Peak
2	5925.000	72.92	-8.58	64.34	-23.86	88.20	Peak
3	* 5969.382	116.18	-8.65	107.53	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5965MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

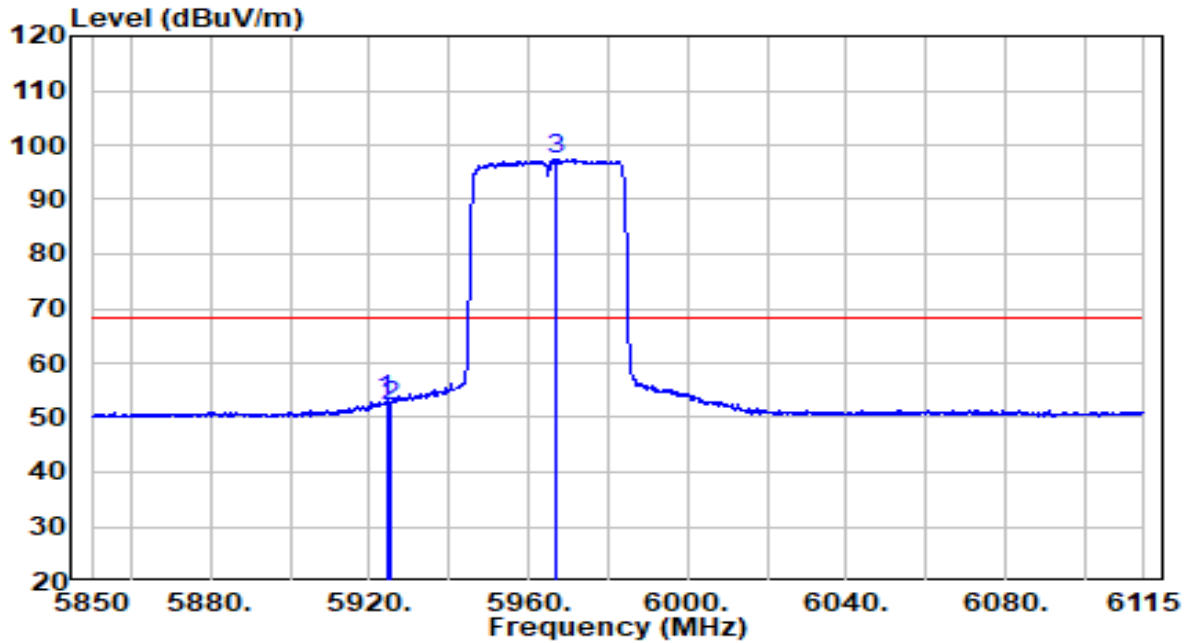


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5924.200	61.69	-8.58	53.11	-15.09	68.20	Average
2	5925.000	60.78	-8.58	52.20	-16.00	68.20	Average
3	* 5966.998	106.19	-8.66	97.53	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5965MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

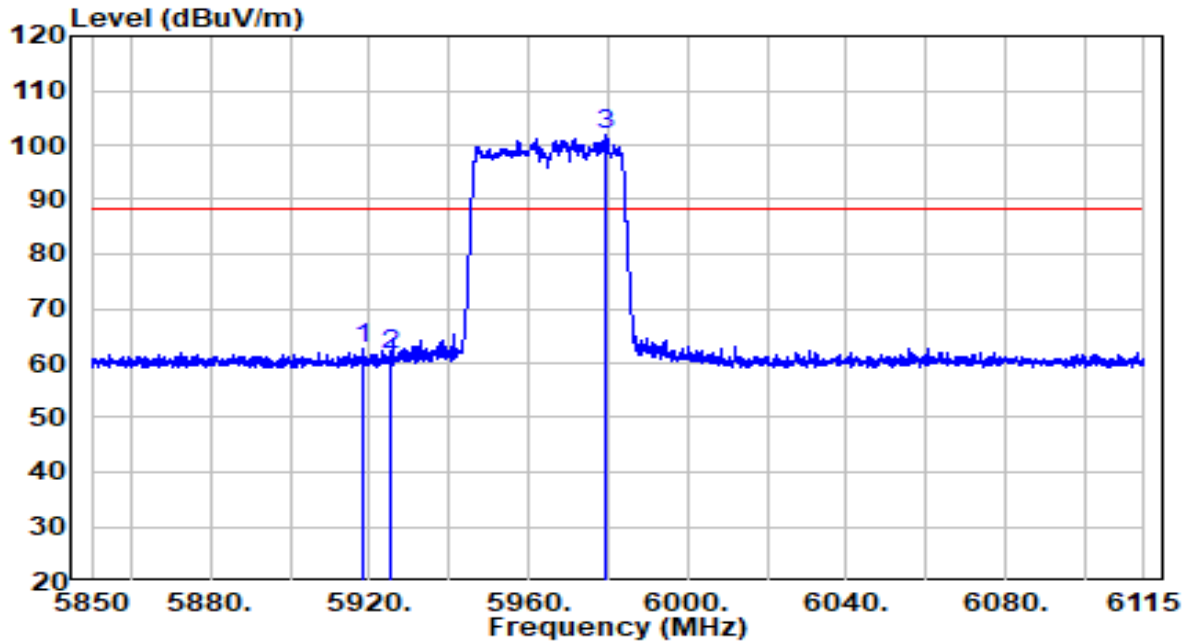


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5918.502	71.28	-8.61	62.67	-25.53	88.20	Peak
2	5925.000	70.12	-8.58	61.54	-26.66	88.20	Peak
3	* 5979.585	110.38	-8.64	101.74	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5965MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

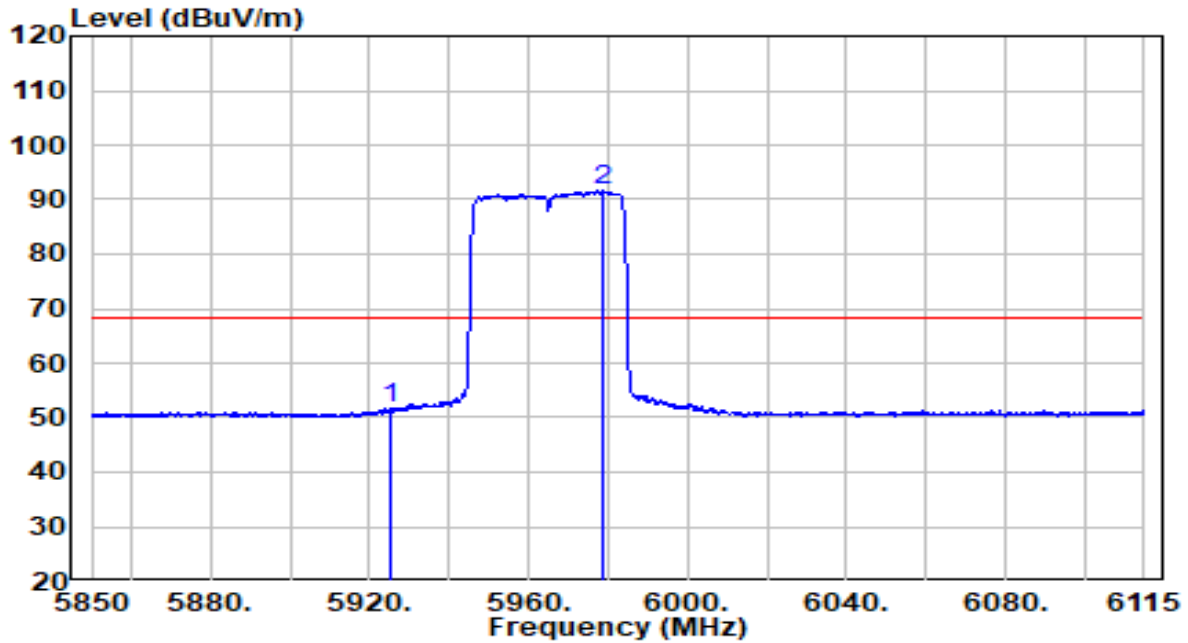


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5925.000	60.17	-8.58	51.59	-16.61	68.20	Average
2	* 5978.790	100.23	-8.64	91.59	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7085MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

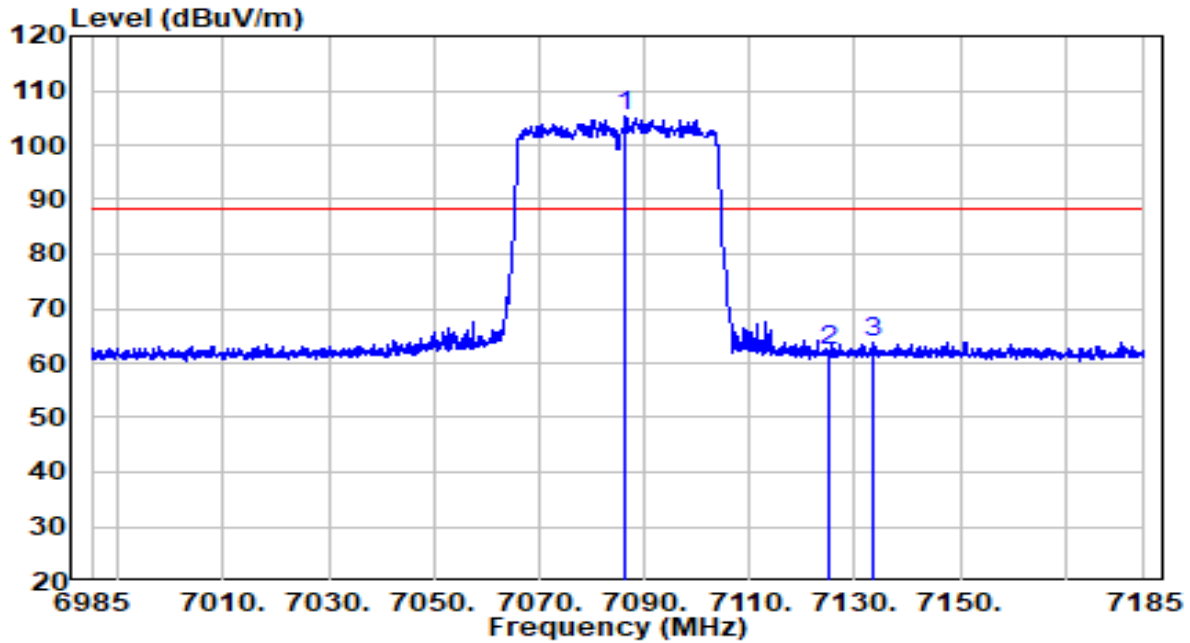


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7086.500	112.02	-6.79	105.23	N/A	N/A	Peak
2	7125.000	68.88	-6.68	62.19	-26.01	88.20	Peak
3	7133.300	70.50	-6.63	63.87	-24.33	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7085MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

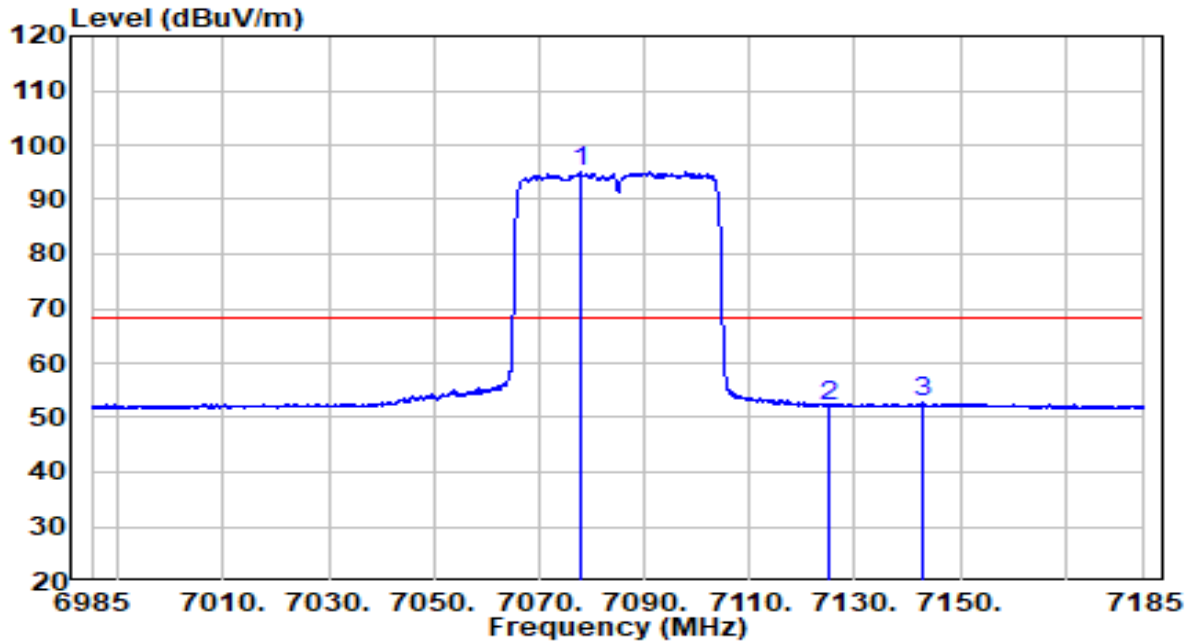


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7077.900	101.91	-6.80	95.11	N/A	N/A	Average
2	7125.000	58.78	-6.68	52.10	-16.10	68.20	Average
3	7142.800	59.33	-6.60	52.73	-15.47	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7085MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

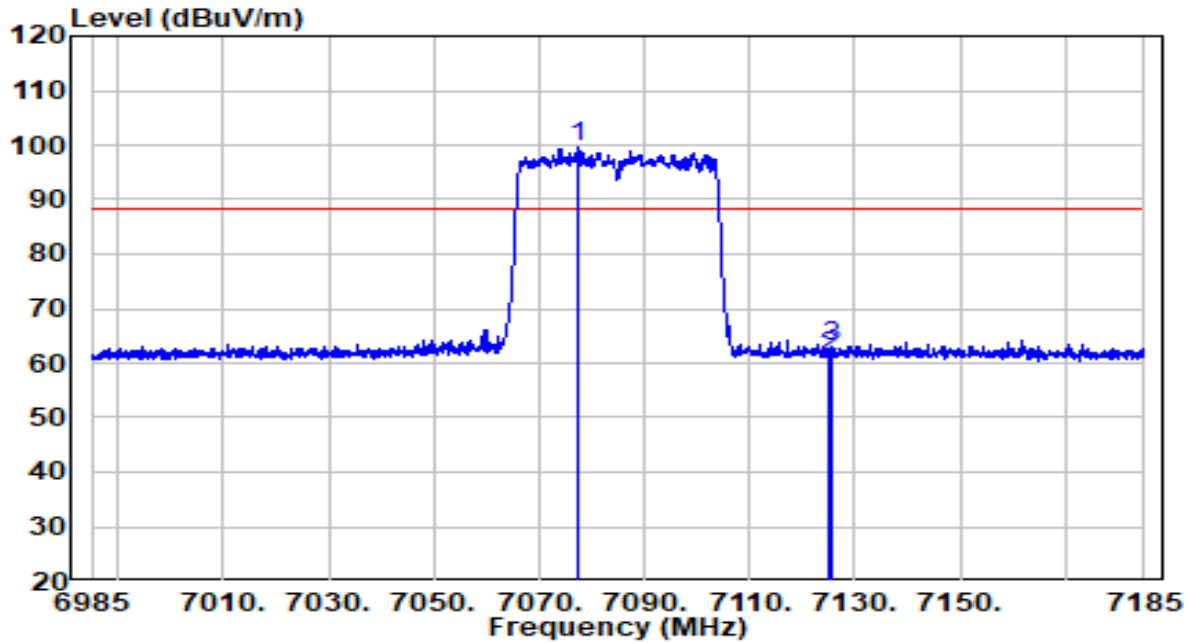


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7077.500	106.31	-6.80	99.51	N/A	N/A	Peak
2	7125.000	67.77	-6.68	61.08	-27.12	88.20	Peak
3	7125.400	69.84	-6.68	63.16	-25.04	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7085MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

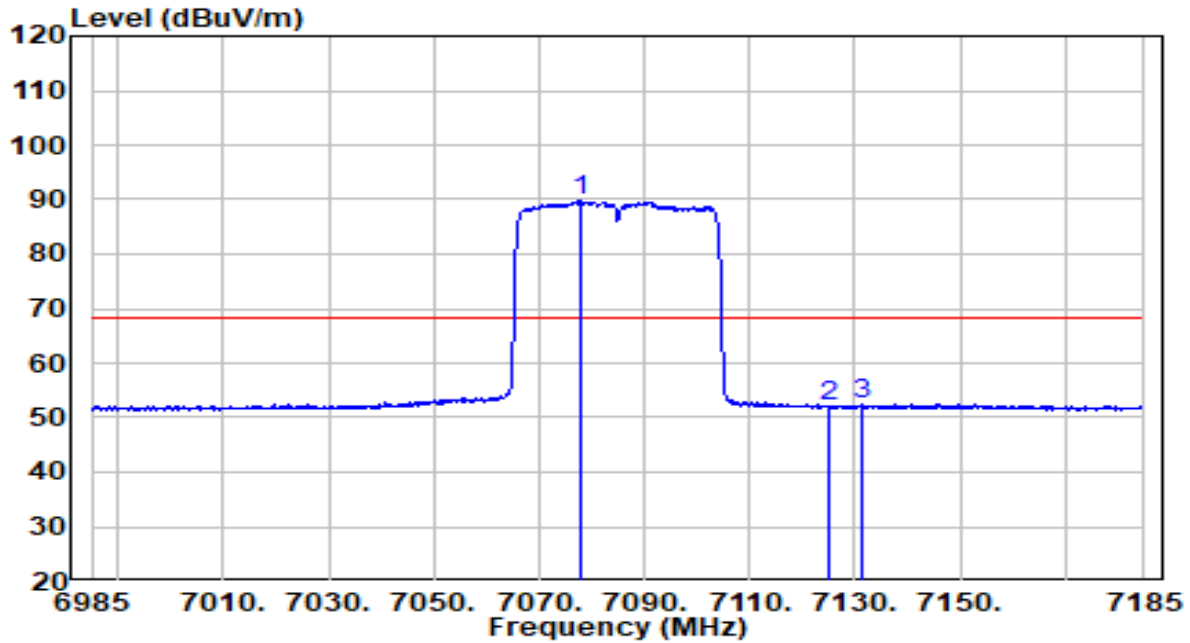


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7077.900	96.55	-6.80	89.75	N/A	N/A	Average
2	7125.000	58.69	-6.68	52.00	-16.20	68.20	Average
3	7131.300	58.95	-6.64	52.31	-15.89	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5985MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

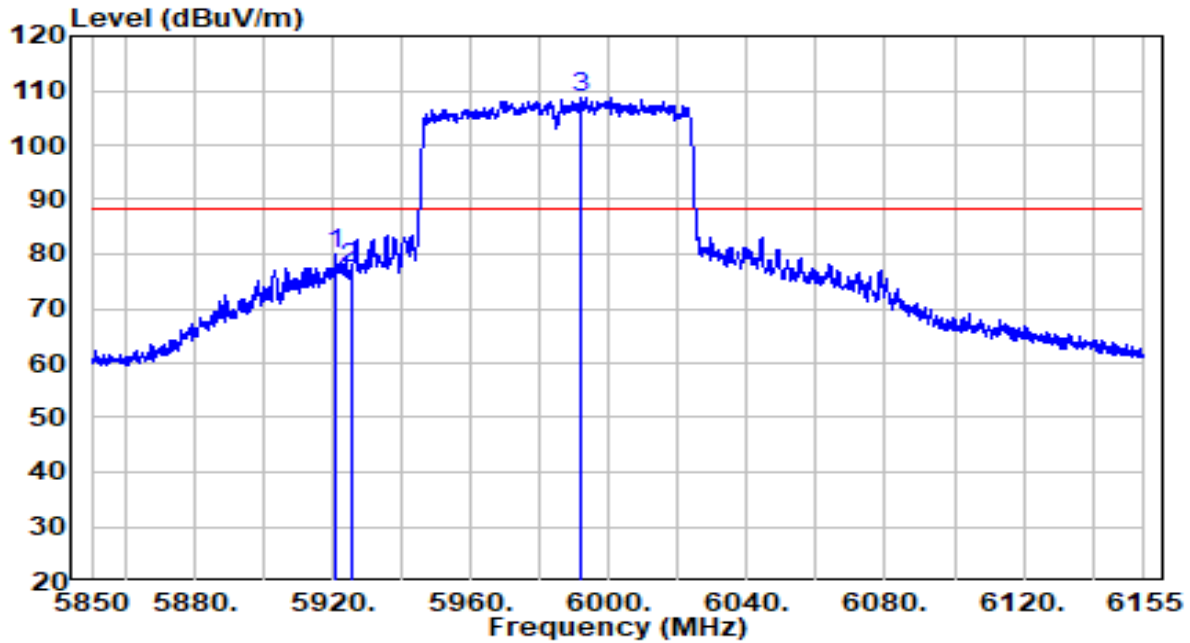


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5920.607	88.63	-8.60	80.03	-8.17	88.20	Peak
2	5925.000	86.06	-8.58	77.48	-10.72	88.20	Peak
3	* 5991.978	117.45	-8.63	108.82	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5985MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

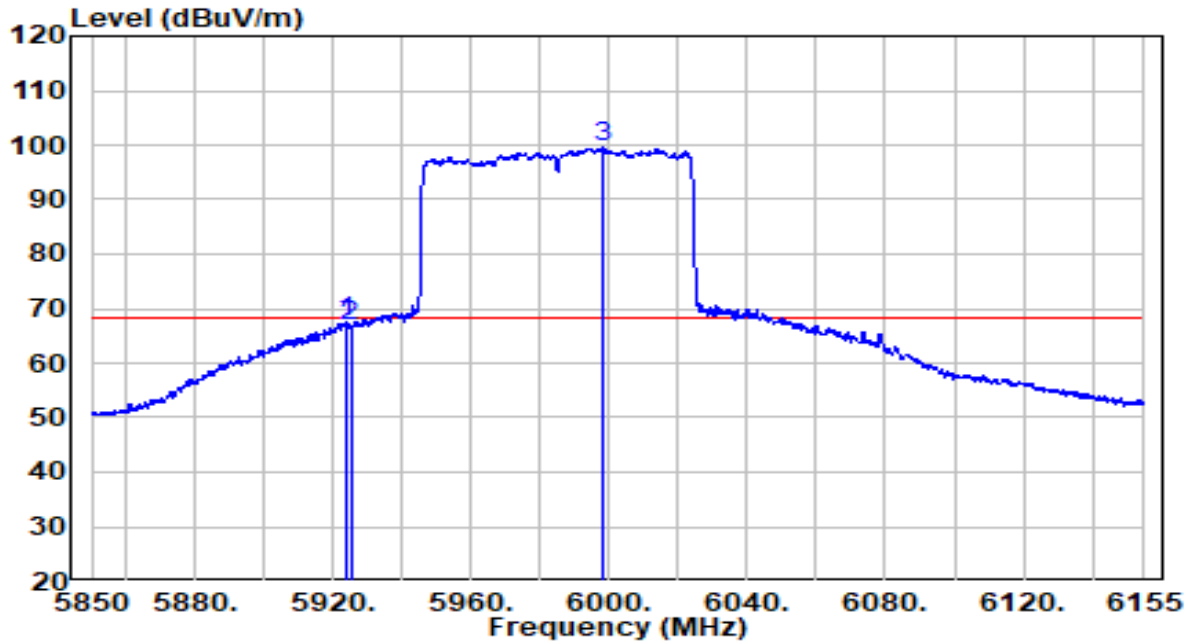


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5924.115	76.06	-8.59	67.48	-0.72	68.20	Average
2	5925.030	75.35	-8.58	66.77	-1.43	68.20	Average
3	* 5997.925	108.09	-8.62	99.47	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5985MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

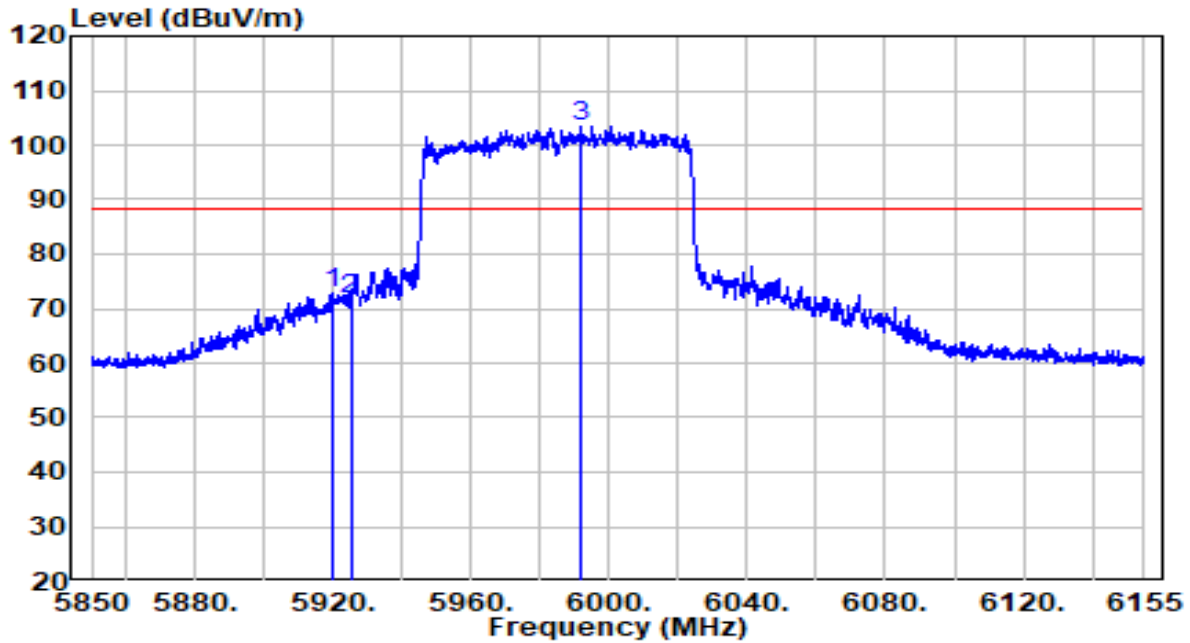


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5920.150	81.32	-8.60	72.72	-15.48	88.20	Peak
2	5925.030	80.33	-8.58	71.75	-16.45	88.20	Peak
3	* 5991.672	112.11	-8.63	103.48	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5985MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

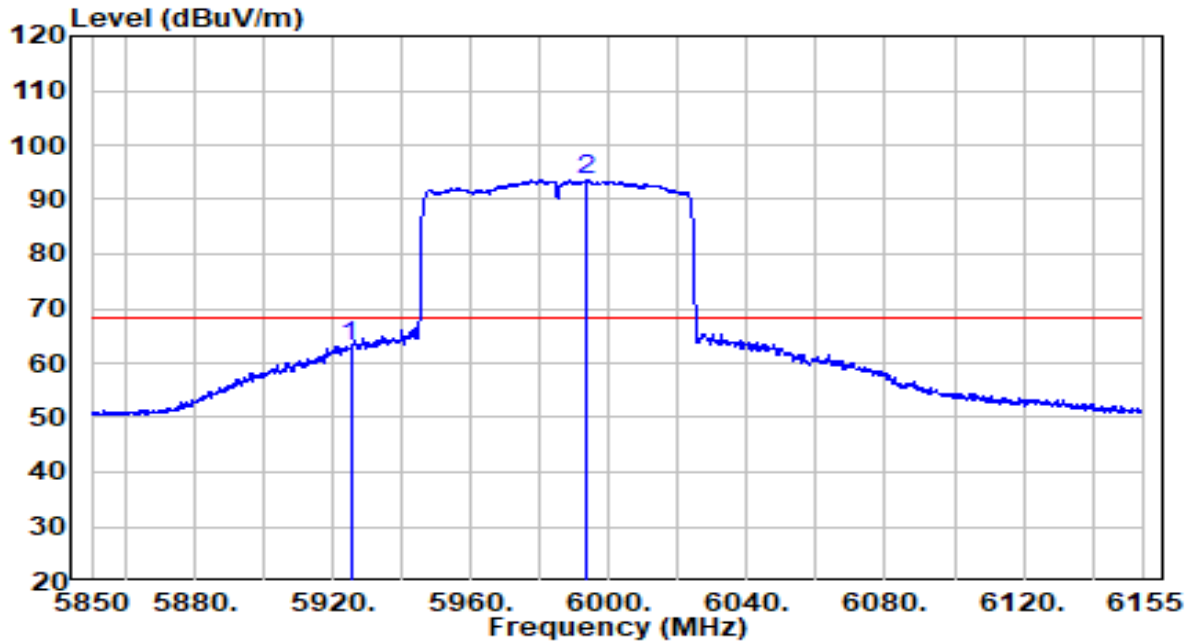


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5925.000	71.60	-8.58	63.02	-5.18	68.20	Average
2	* 5993.655	102.30	-8.63	93.68	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7025MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

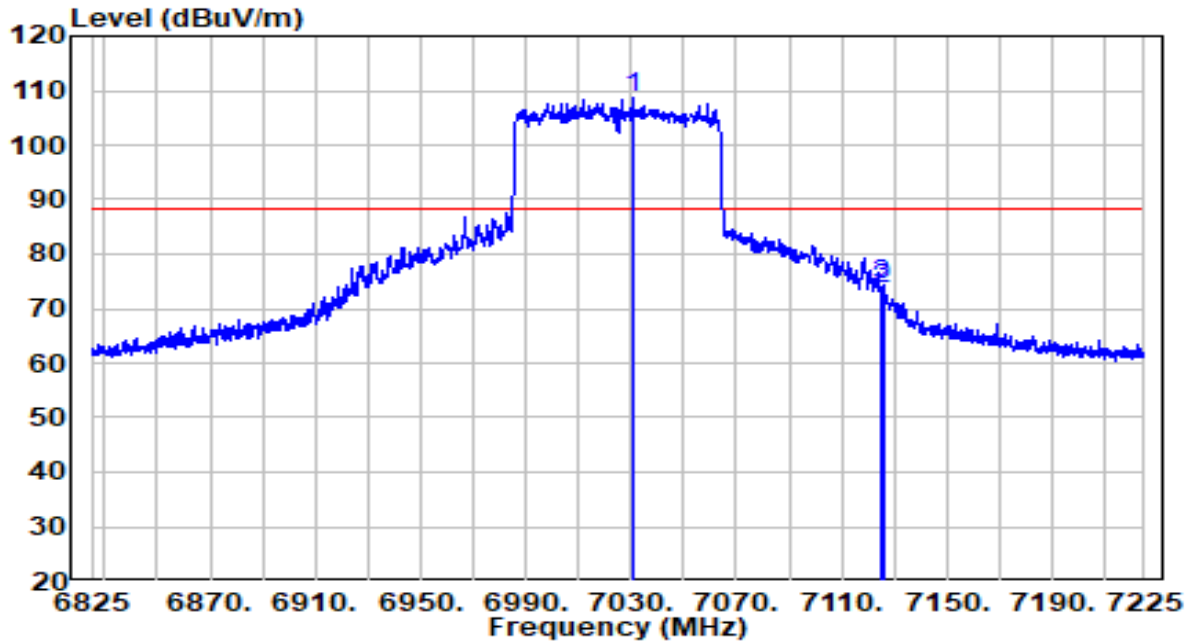


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7030.400	115.59	-6.87	108.72	N/A	N/A	Peak
2	7125.000	80.19	-6.68	73.50	-14.70	88.20	Peak
3	7125.600	81.14	-6.68	74.46	-13.74	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7025MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

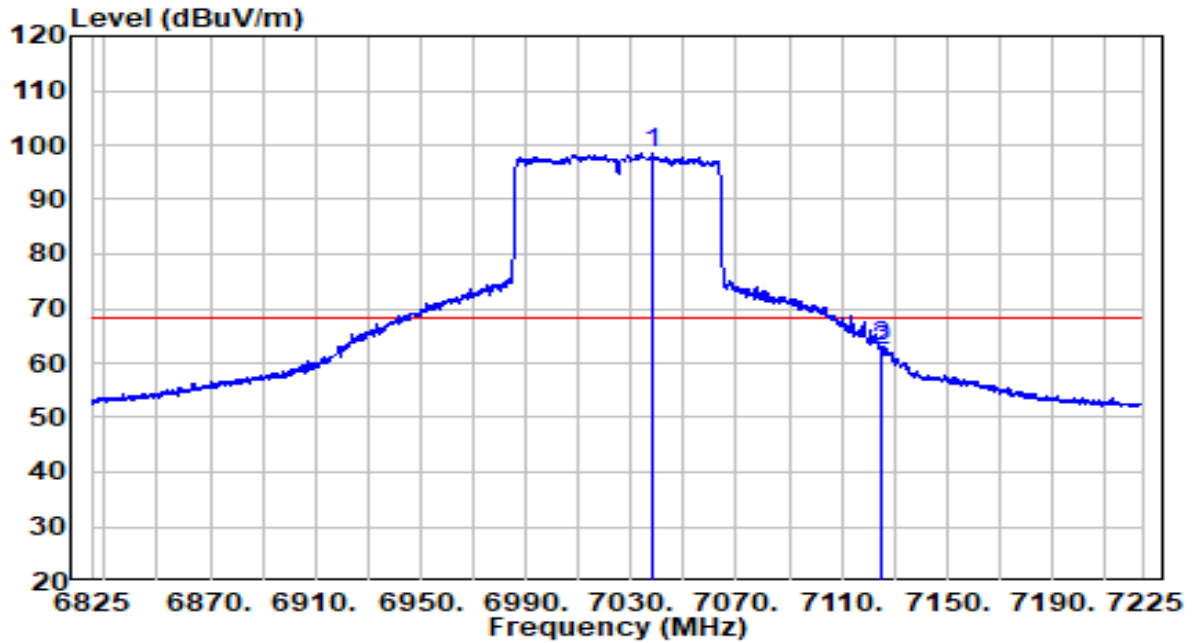


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7038.000	105.28	-6.87	98.41	N/A	N/A	Average
2	7125.000	69.06	-6.68	62.37	-5.83	68.20	Average
3	7125.200	69.72	-6.68	63.04	-5.16	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7025MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

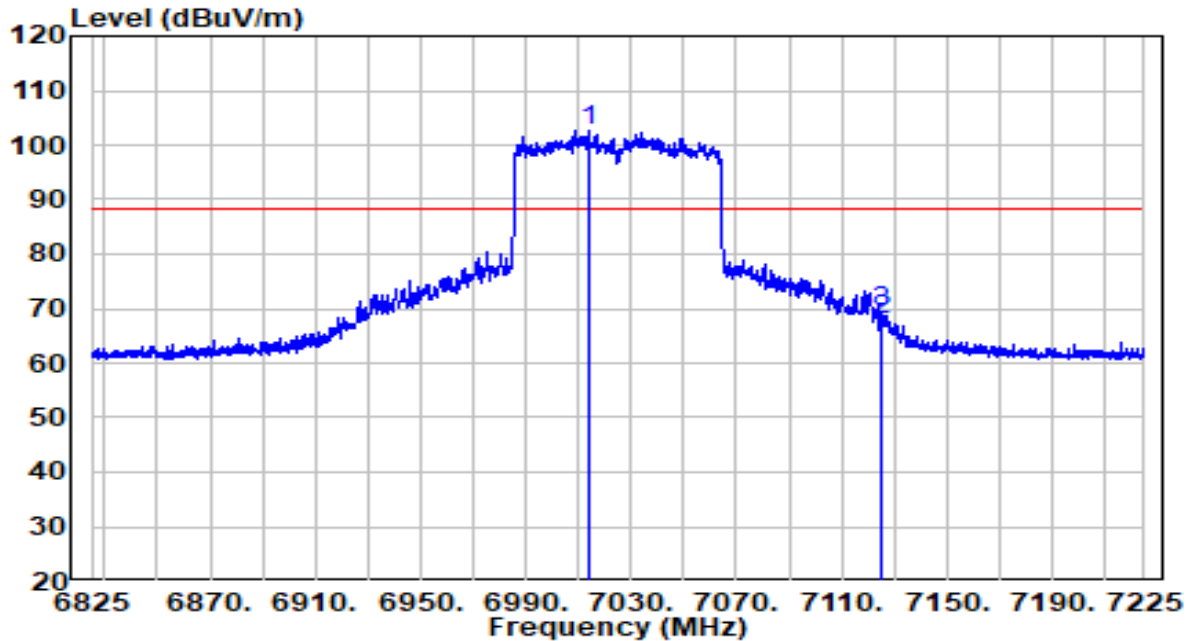


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 7014.200	109.66	-6.89	102.77	N/A	N/A	Peak
2	7125.000	74.76	-6.68	68.08	-20.12	88.20	Peak
3	7125.200	76.14	-6.68	69.45	-18.75	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7025MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

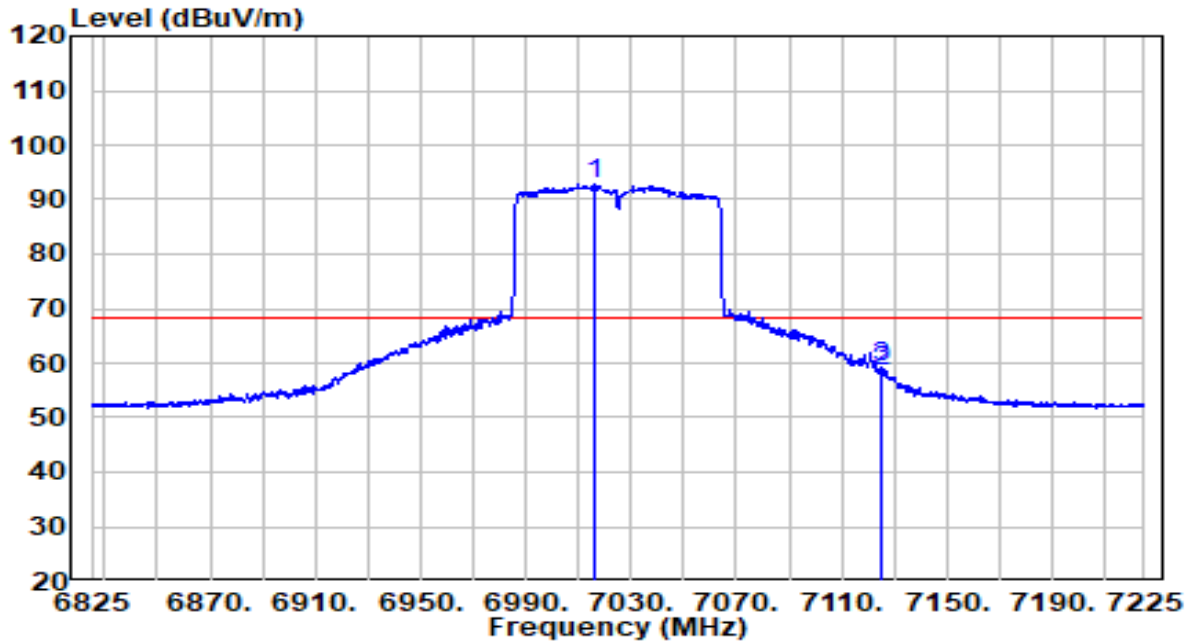


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 7016.200	99.82	-6.88	92.95	N/A	N/A	Average
2	7125.000	65.09	-6.68	58.41	-9.79	68.20	Average
3	7125.200	65.79	-6.68	59.11	-9.09	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6025MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

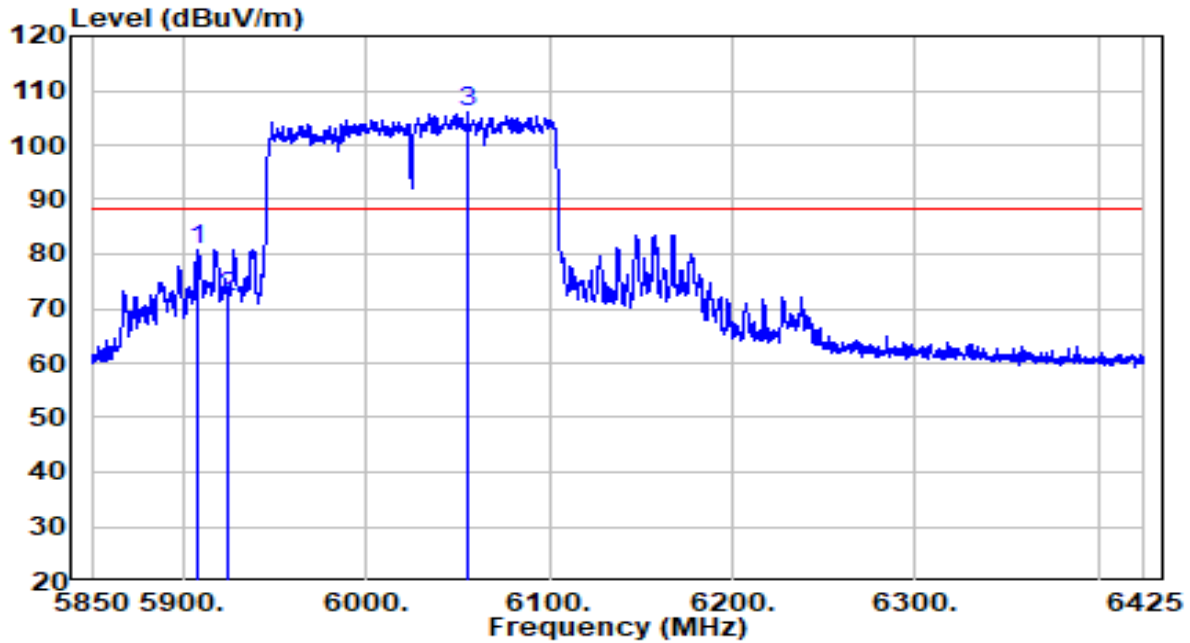


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5908.362	89.44	-8.64	80.80	-7.40	88.20	Peak
2	5925.000	80.57	-8.58	71.99	-16.21	88.20	Peak
3	* 6055.275	114.70	-8.50	106.20	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6025MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

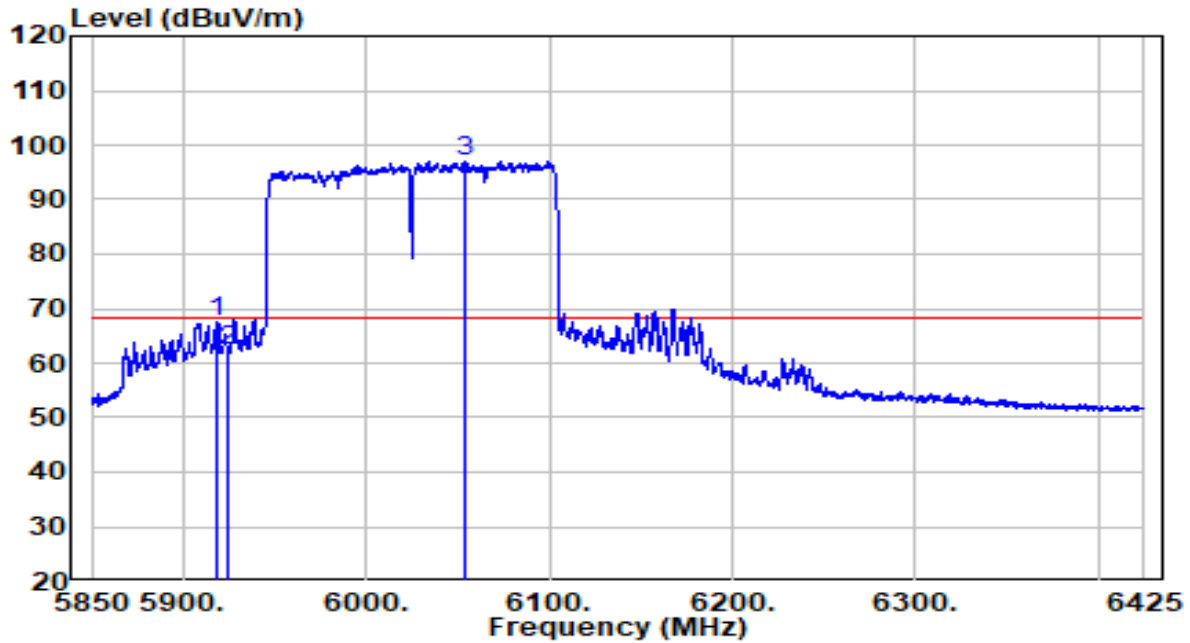


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5918.425	76.06	-8.61	67.45	-0.75	68.20	Average
2	5925.038	70.70	-8.58	62.12	-6.08	68.20	Average
3	* 6053.550	105.64	-8.51	97.14	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6025MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

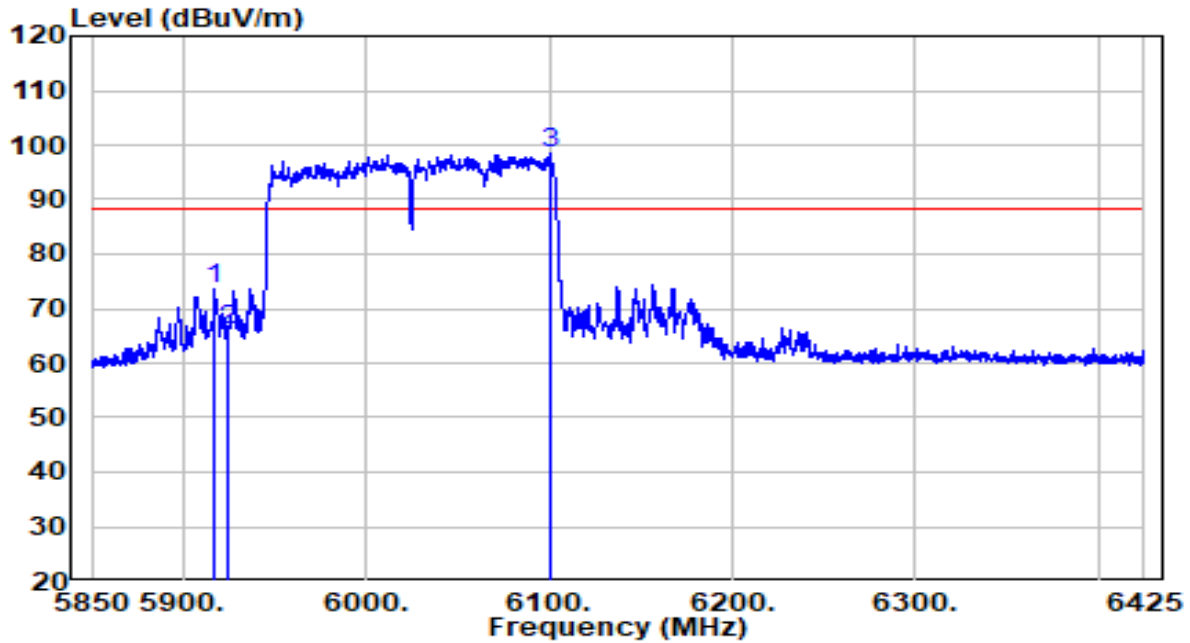


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5916.987	82.32	-8.62	73.71	-14.49	88.20	Peak
2	5925.000	74.74	-8.58	66.16	-22.04	88.20	Peak
3	* 6100.125	106.82	-8.45	98.37	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6025MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

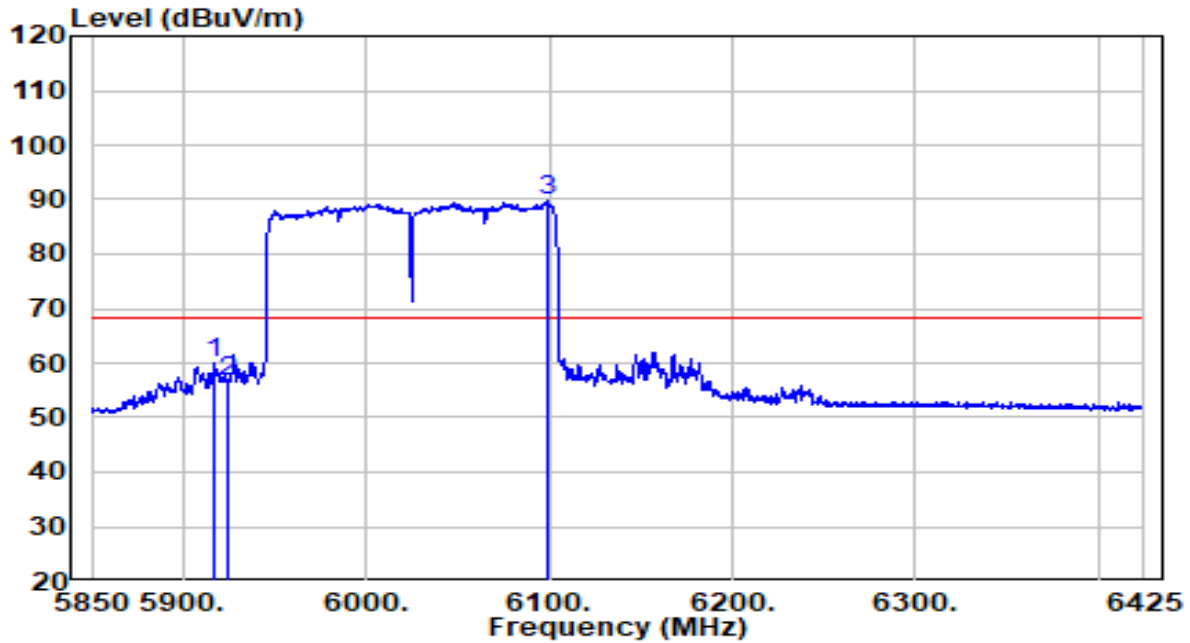


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5916.700	68.43	-8.62	59.82	N/A	N/A	Average
2	5925.000	65.22	-8.58	56.64	-11.56	68.20	Average
3	* 6098.975	98.14	-8.45	89.69	21.49	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6985MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

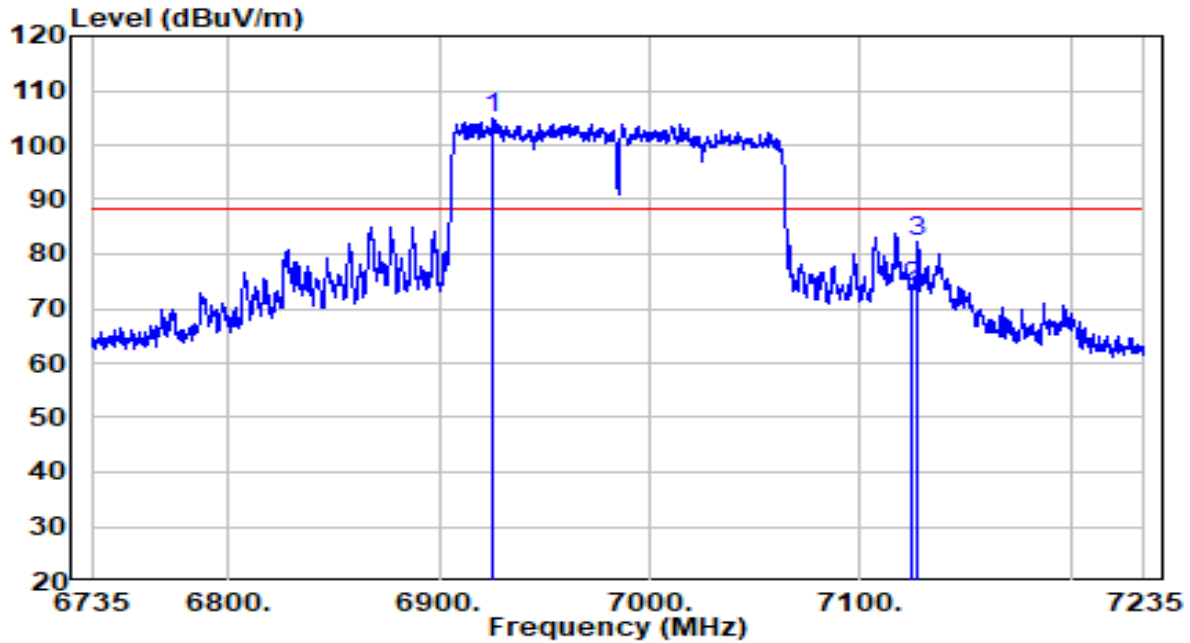


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 6926.000	111.81	-6.98	104.82	N/A	N/A	Peak
2	7125.000	80.51	-6.68	73.82	-14.38	88.20	Peak
3	7127.500	88.81	-6.67	82.14	-6.06	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6985MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

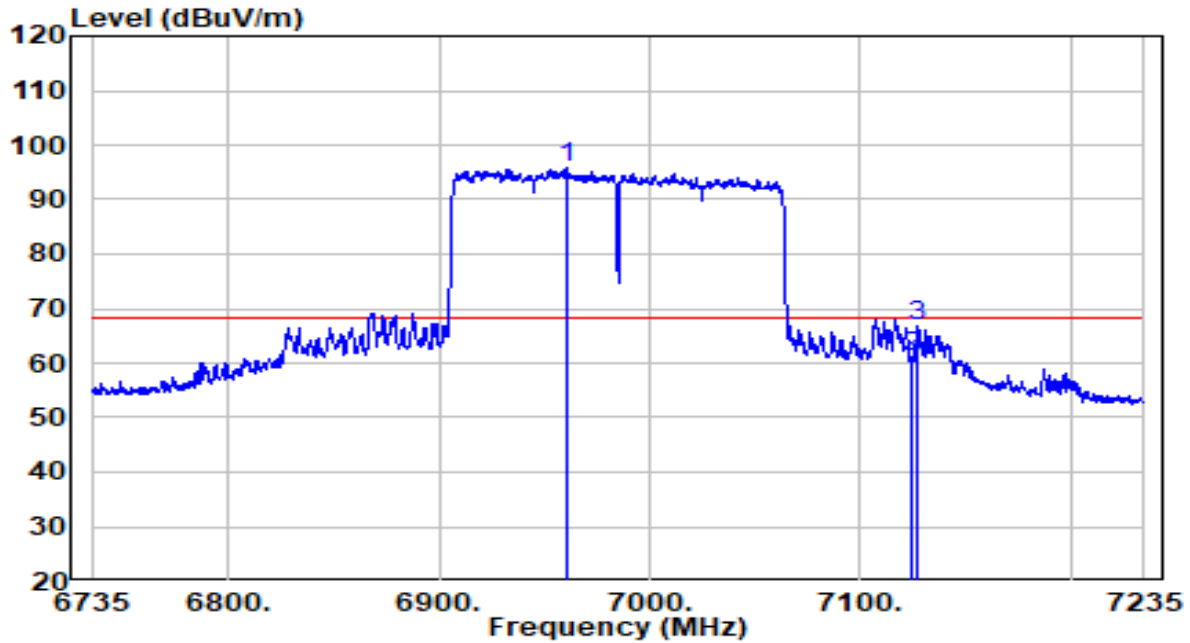


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 6960.250	102.76	-6.99	95.76	N/A	N/A	Average
2	7125.000	67.81	-6.68	61.12	-7.08	68.20	Average
3	7127.250	73.36	-6.67	66.69	-1.51	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6985MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

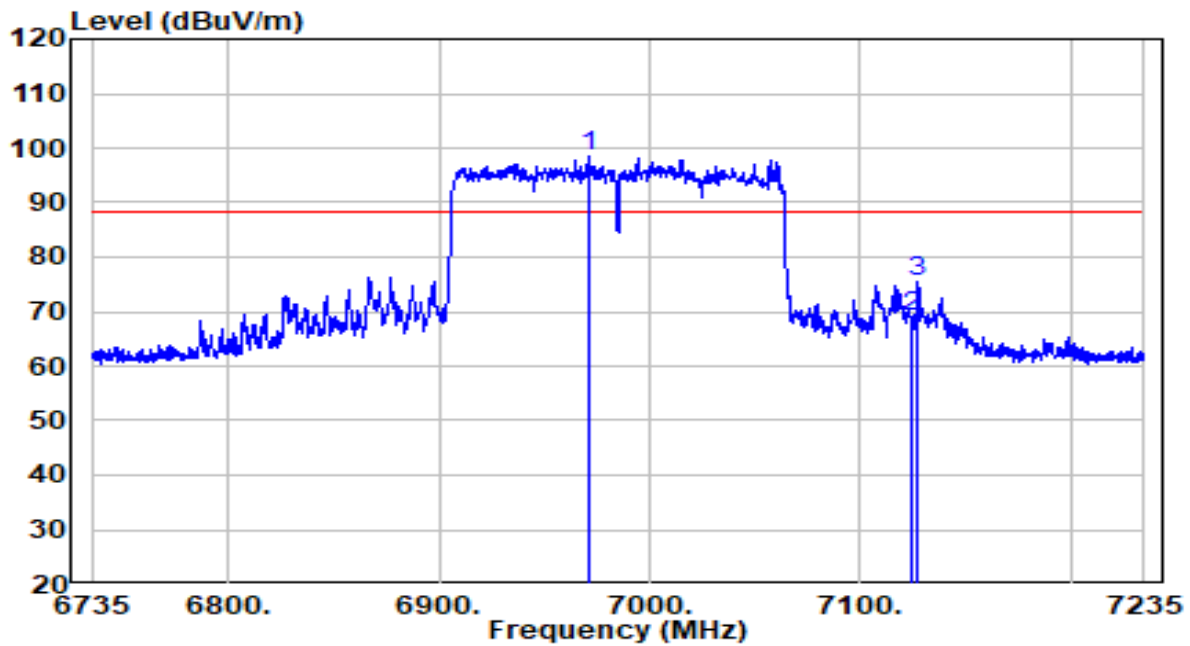


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 6970.750	105.62	-6.99	98.64	N/A	N/A	Peak
2	7125.000	75.82	-6.68	69.13	-19.07	88.20	Peak
3	7127.750	81.97	-6.67	75.30	-12.90	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-21
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	16.6°C / 43.7%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6985MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

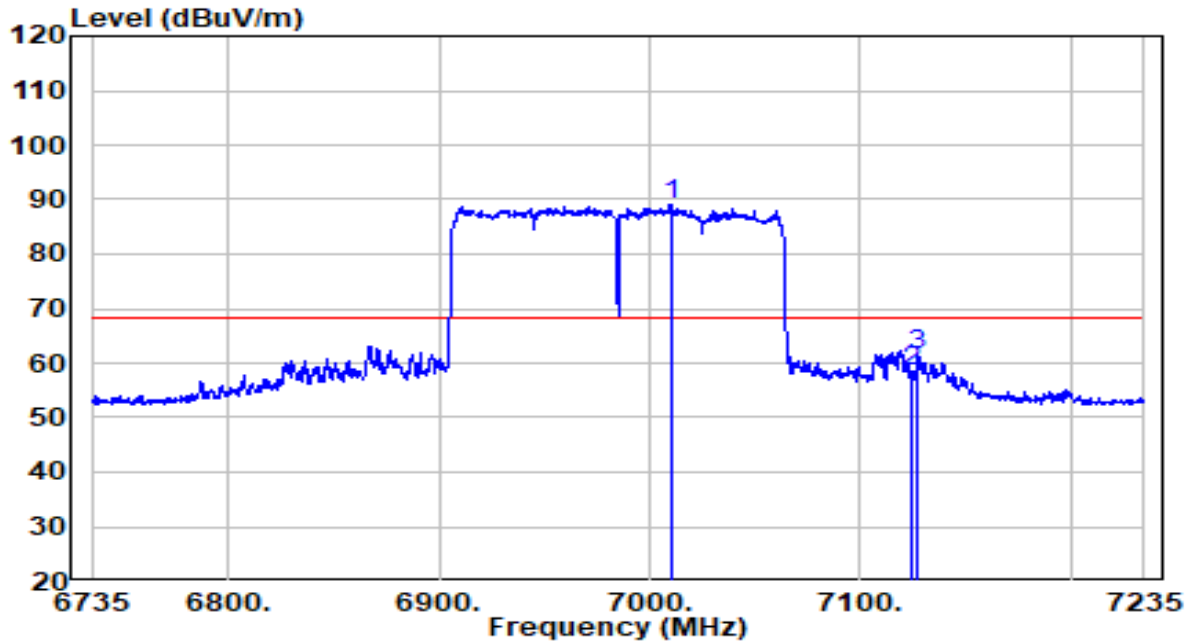


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7010.000	96.00	-6.93	89.07	N/A	N/A	Average
2	7125.000	65.00	-6.68	58.31	-9.89	68.20	Average
3	7127.500	68.17	-6.67	61.51	-6.69	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

**Sunyear Filter N<sub>SS</sub>=1**

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5955MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

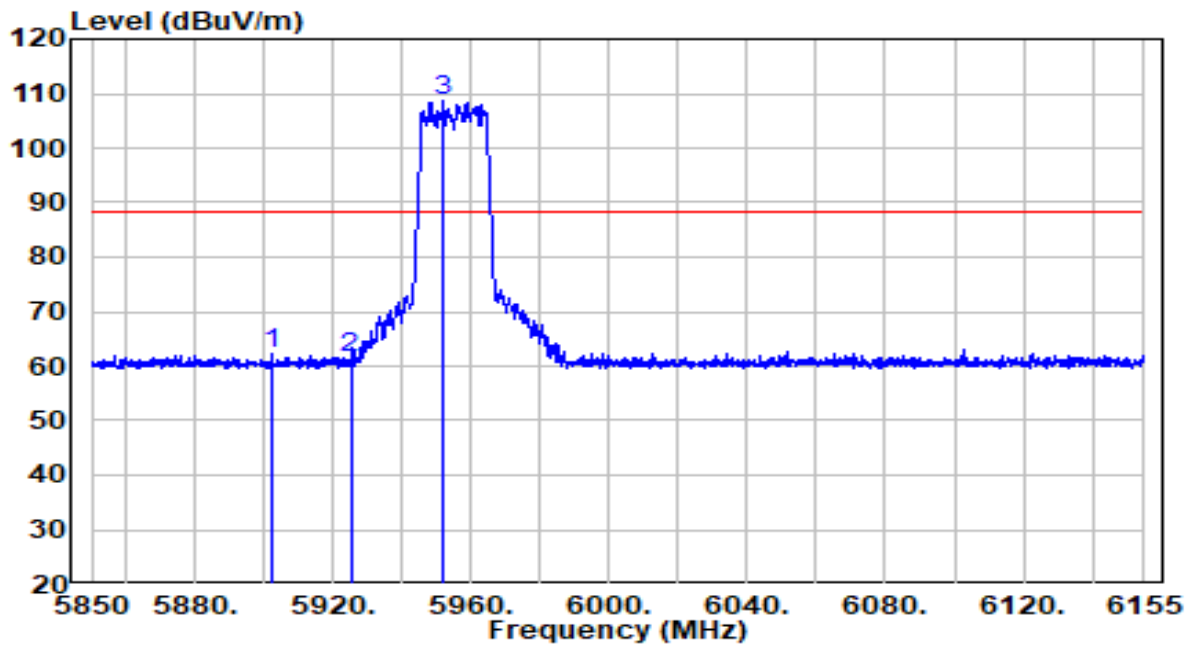


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5902.308	71.04	-8.64	62.40	-25.80	88.20	Peak
2	5925.000	70.02	-8.58	61.44	-26.76	88.20	Peak
3	* 5951.870	117.33	-8.63	108.70	N/A	N/A	Peak

**Note:**

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5955MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

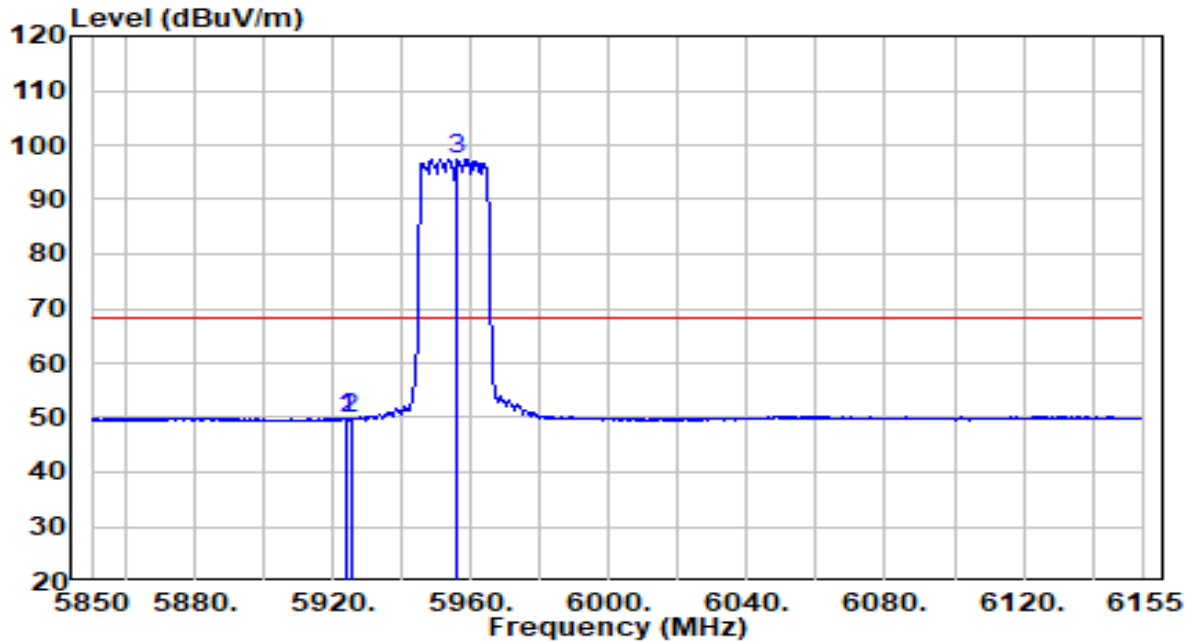


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5923.810	58.56	-8.59	49.97	-18.23	68.20	Average
2	5925.000	58.50	-8.58	49.92	-18.28	68.20	Average
3	* 5955.987	106.06	-8.64	97.42	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5955MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

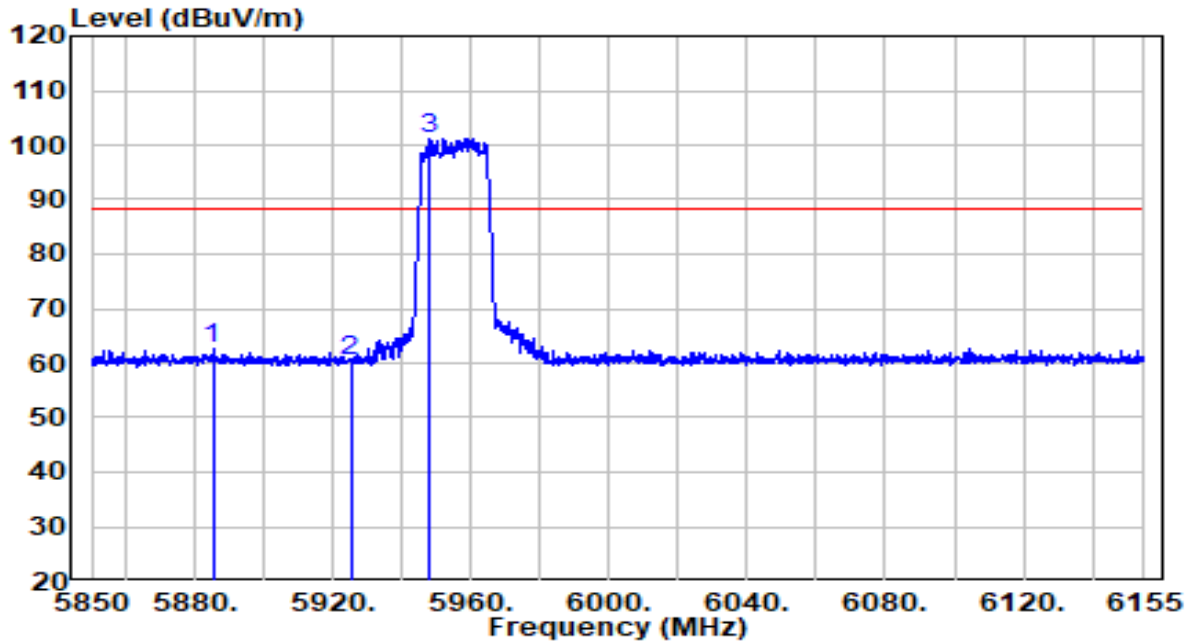


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5885.075	71.23	-8.62	62.61	-25.59	88.20	Peak
2	5925.000	69.13	-8.58	60.55	-27.65	88.20	Peak
3	* 5948.058	109.79	-8.63	101.16	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5955MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

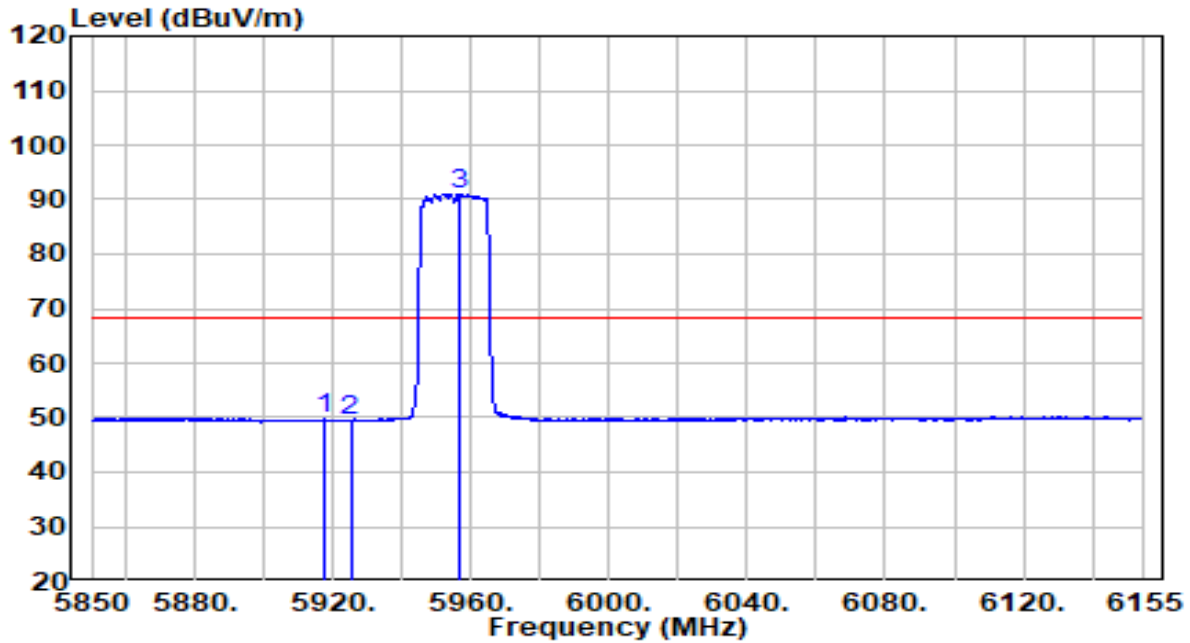


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5917.252	58.32	-8.62	49.70	-18.50	68.20	Average
2	5925.000	58.00	-8.58	49.42	-18.78	68.20	Average
3	* 5956.445	99.74	-8.64	91.09	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7095MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

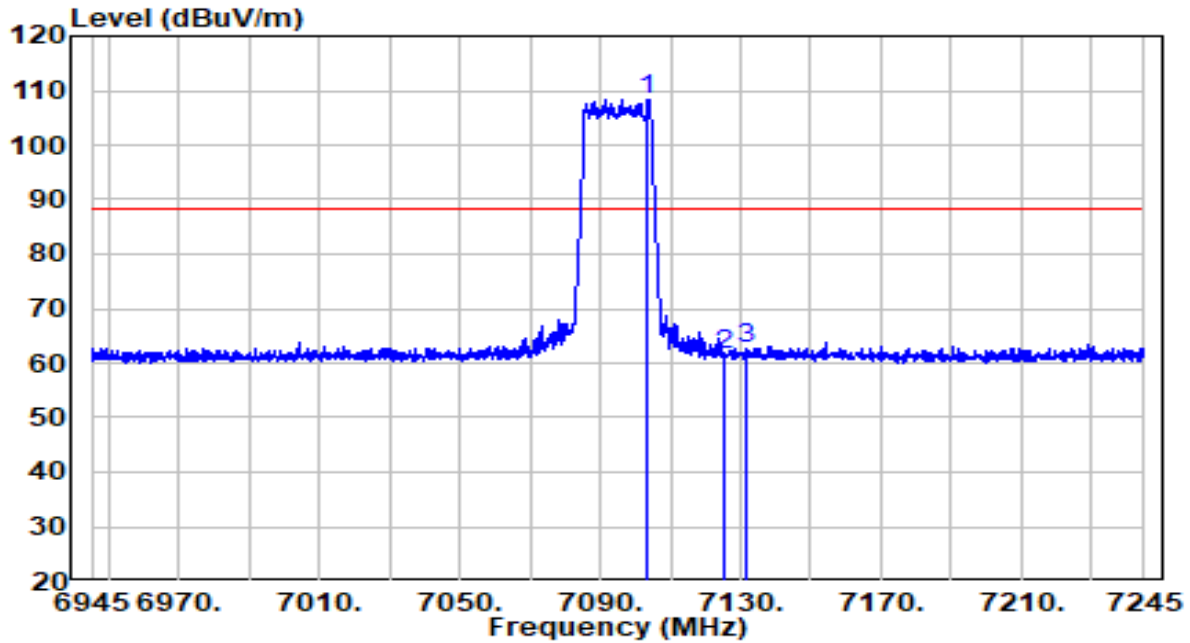


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7103.550	115.04	-6.71	108.33	N/A	N/A	Peak
2	7125.000	68.04	-6.68	61.36	-26.84	88.20	Peak
3	7131.900	69.44	-6.64	62.80	-25.40	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7095MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

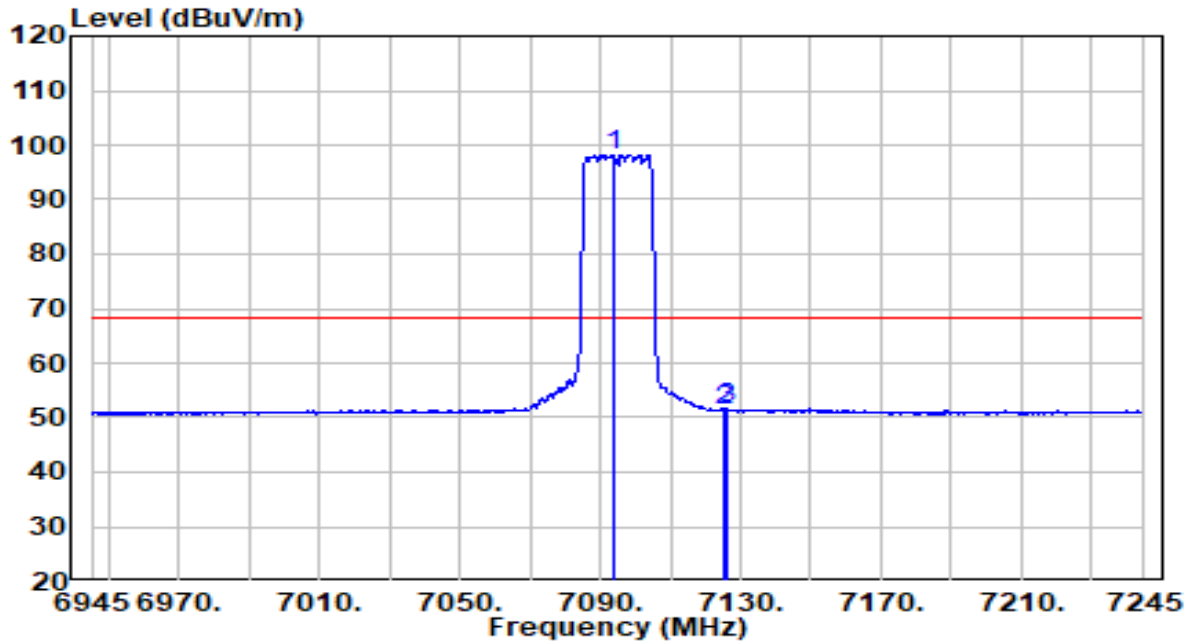


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7093.800	105.04	-6.75	98.29	N/A	N/A	Average
2	7125.000	57.99	-6.68	51.31	-16.89	68.20	Average
3	7125.750	58.20	-6.68	51.53	-16.67	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7095MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

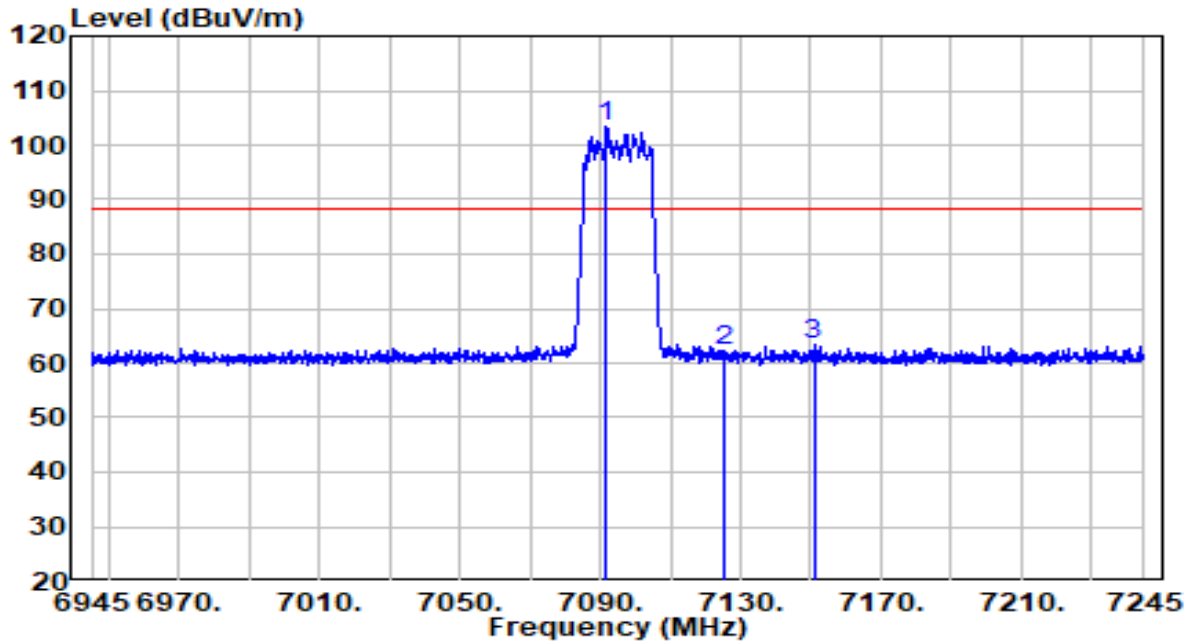


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7091.850	110.23	-6.76	103.47	N/A	N/A	Peak
2	7125.000	68.93	-6.68	62.24	-25.96	88.20	Peak
3	7150.800	69.95	-6.58	63.37	-24.83	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7095MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

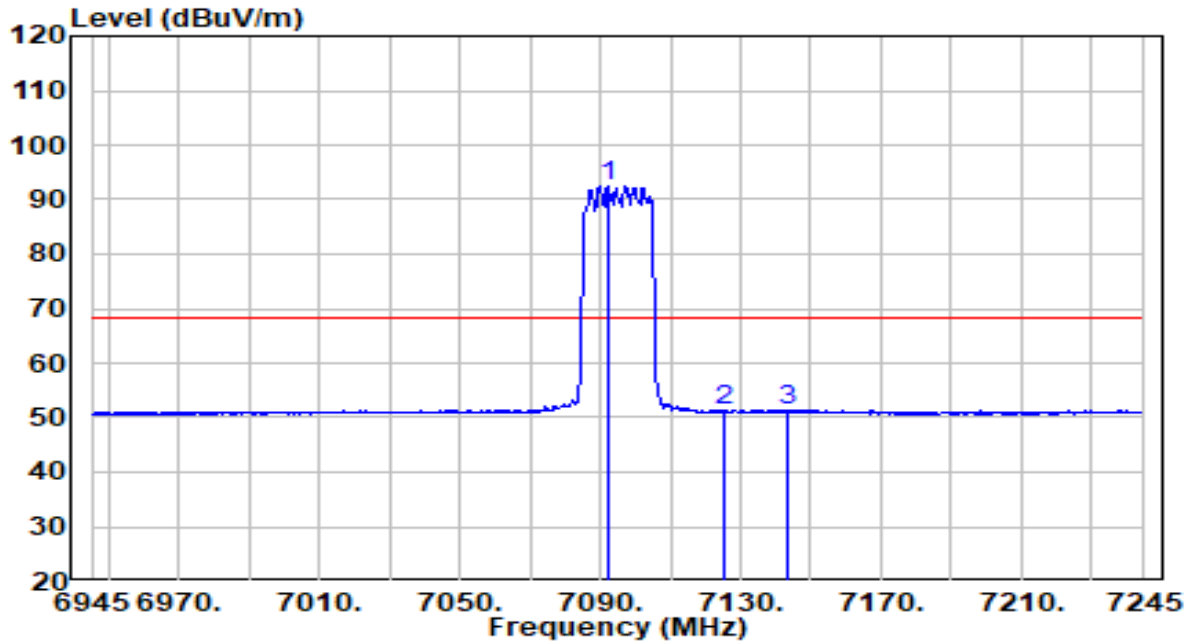


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7092.150	99.16	-6.76	92.40	N/A	N/A	Average
2	7125.000	57.92	-6.68	51.24	-16.96	68.20	Average
3	7143.150	58.02	-6.60	51.43	-16.77	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5965MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

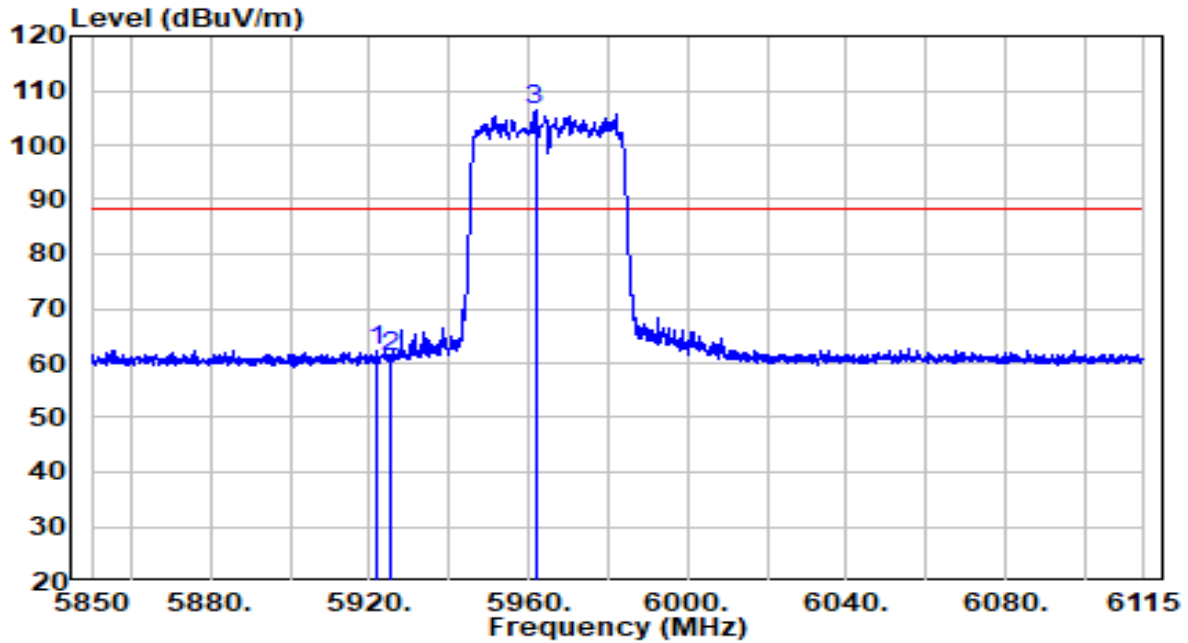


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5922.080	70.80	-8.59	62.21	-25.99	88.20	Peak
2	5925.000	69.54	-8.58	60.96	-27.24	88.20	Peak
3	* 5961.697	115.08	-8.65	106.43	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5965MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

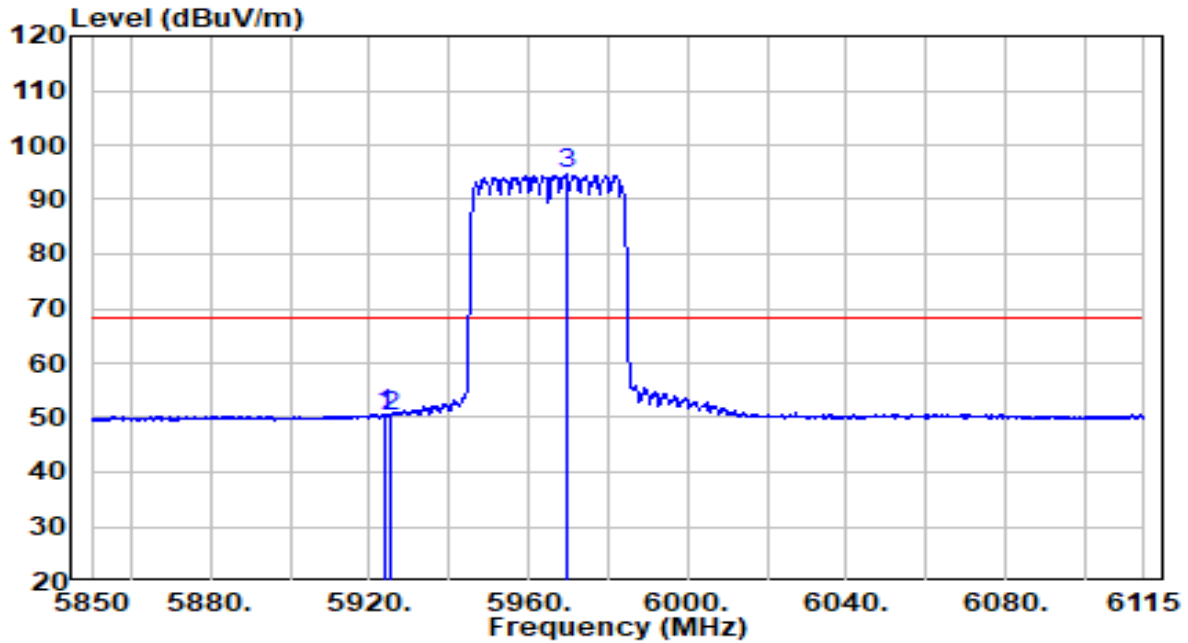


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5923.670	59.28	-8.59	50.69	-17.51	68.20	Average
2	5925.000	58.63	-8.58	50.05	-18.15	68.20	Average
3	* 5969.382	103.30	-8.65	94.65	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5965MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

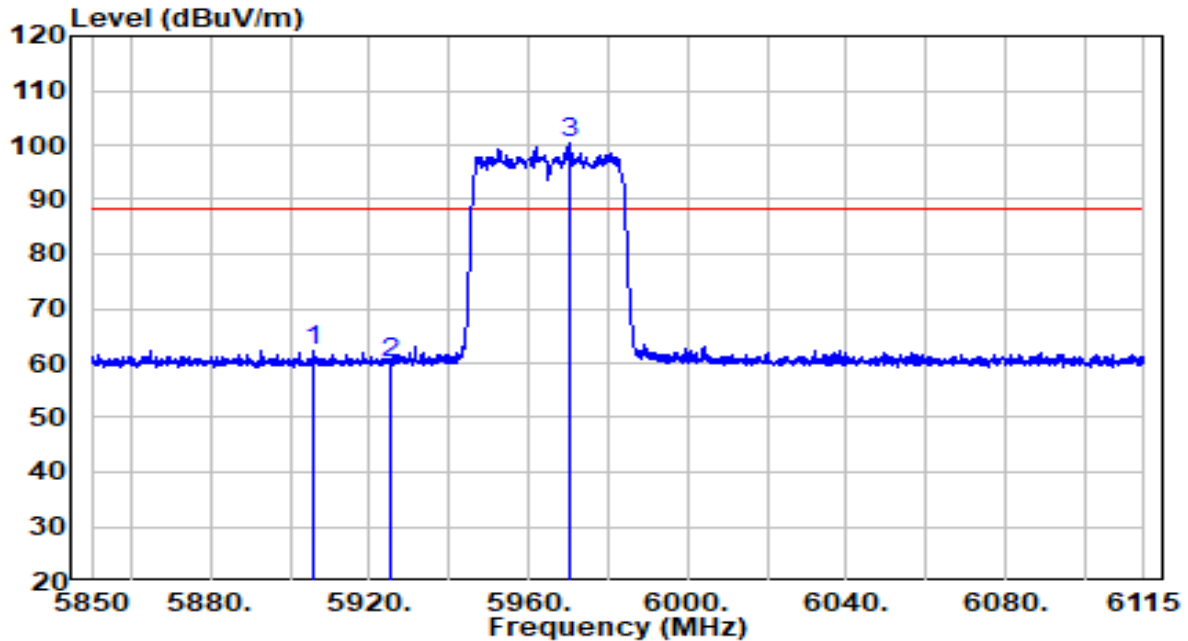


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5905.783	70.84	-8.64	62.20	-26.00	88.20	Peak
2	5925.000	68.67	-8.58	60.09	-28.11	88.20	Peak
3	* 5970.178	109.20	-8.65	100.55	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5965MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

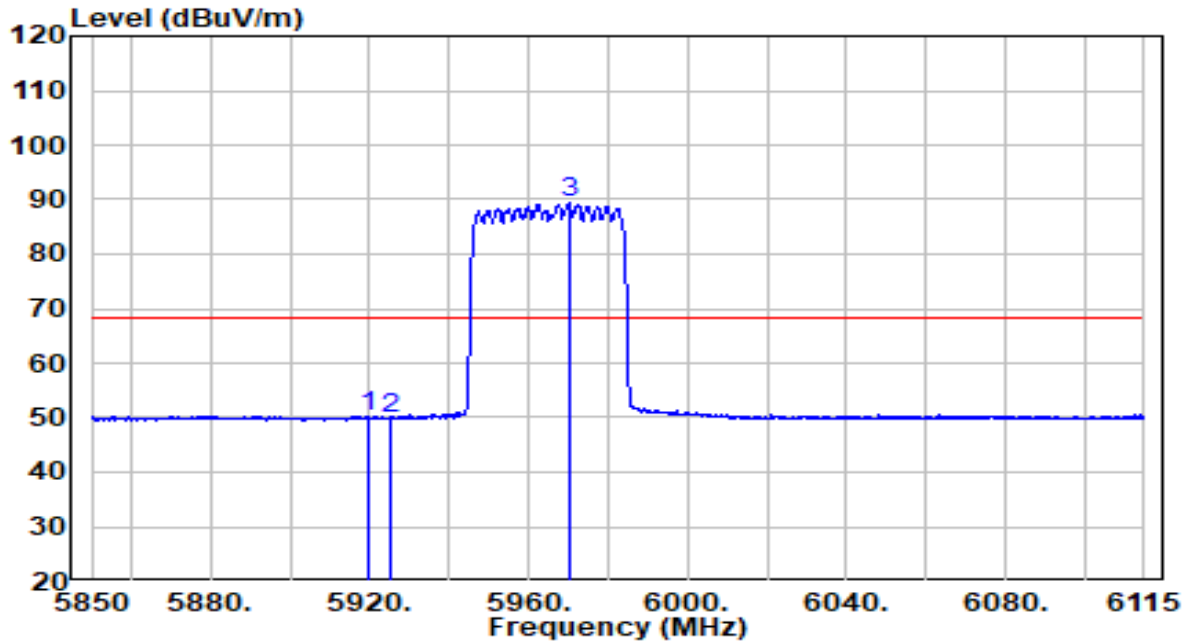


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5919.695	58.97	-8.60	50.37	-17.83	68.20	Average
2	5925.000	58.54	-8.58	49.96	-18.24	68.20	Average
3	* 5970.045	97.92	-8.65	89.27	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7085MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

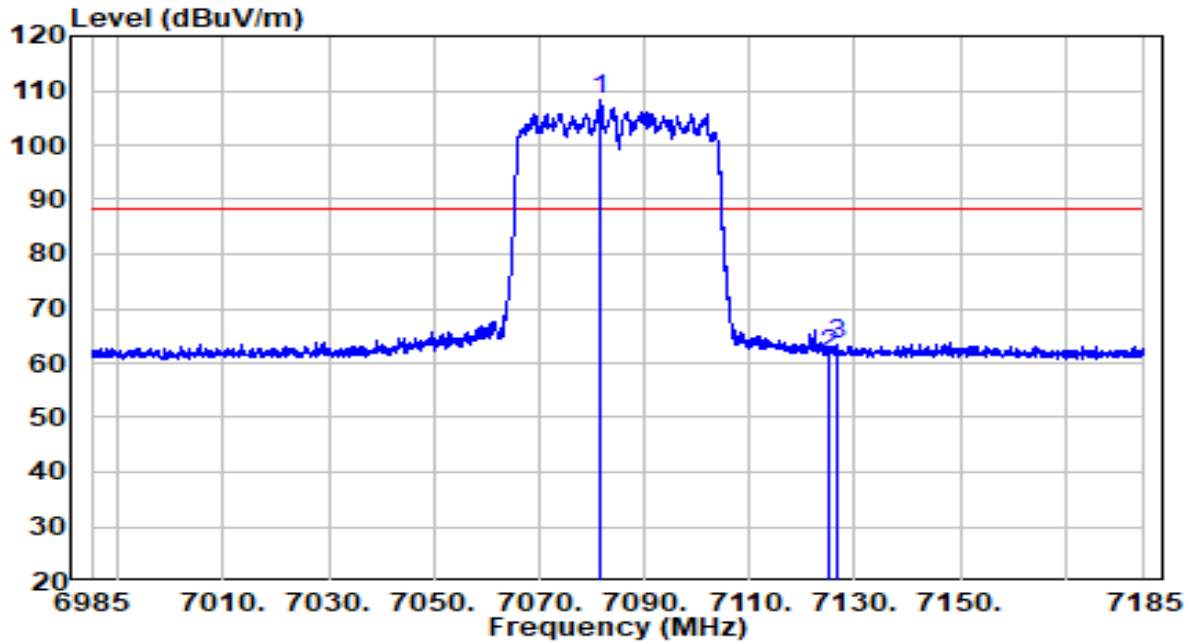


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7081.800	115.06	-6.79	108.27	N/A	N/A	Peak
2	7125.000	68.28	-6.68	61.59	-26.61	88.20	Peak
3	7126.600	69.97	-6.67	63.30	-24.90	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7085MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

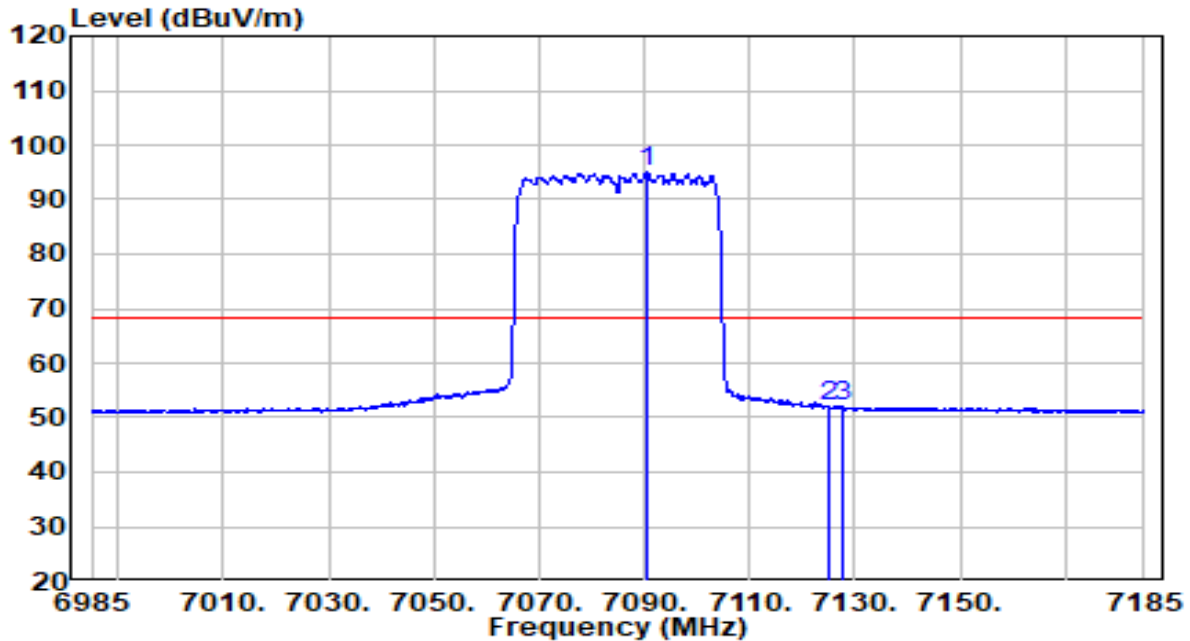


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7090.600	101.73	-6.77	94.96	N/A	N/A	Average
2	7125.000	58.61	-6.68	51.93	-16.27	68.20	Average
3	7127.500	58.73	-6.67	52.06	-16.14	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7085MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

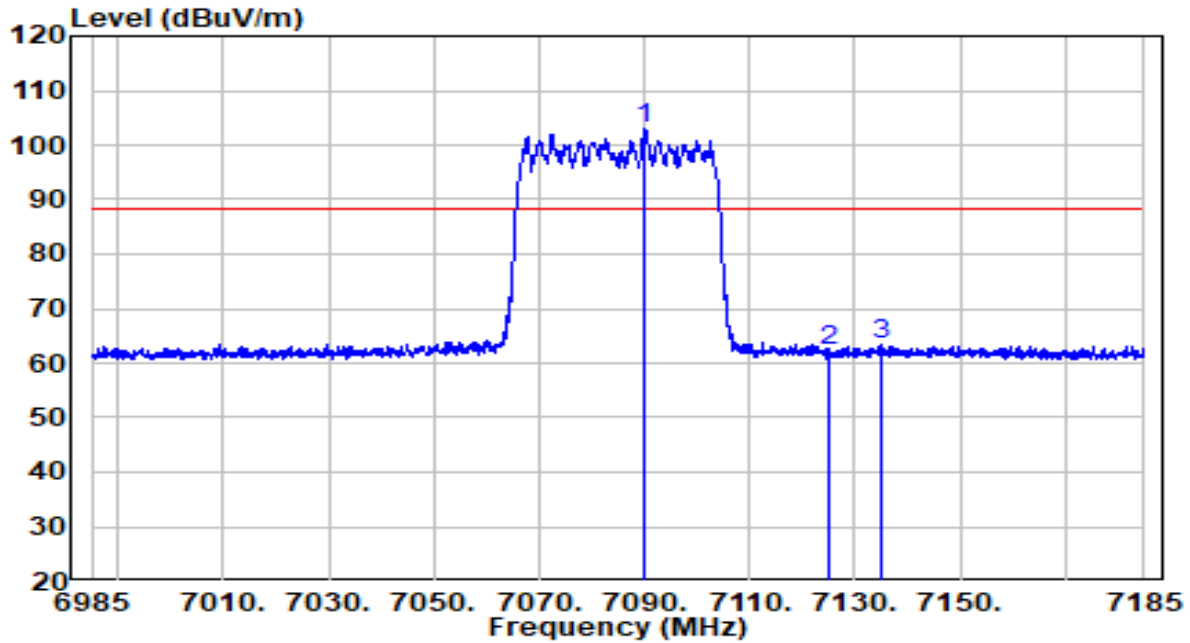


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 7090.200	109.65	-6.77	102.88	N/A	N/A	Peak
2	7125.000	68.88	-6.68	62.20	-26.00	88.20	Peak
3	7135.200	69.87	-6.62	63.25	-24.95	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7085MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

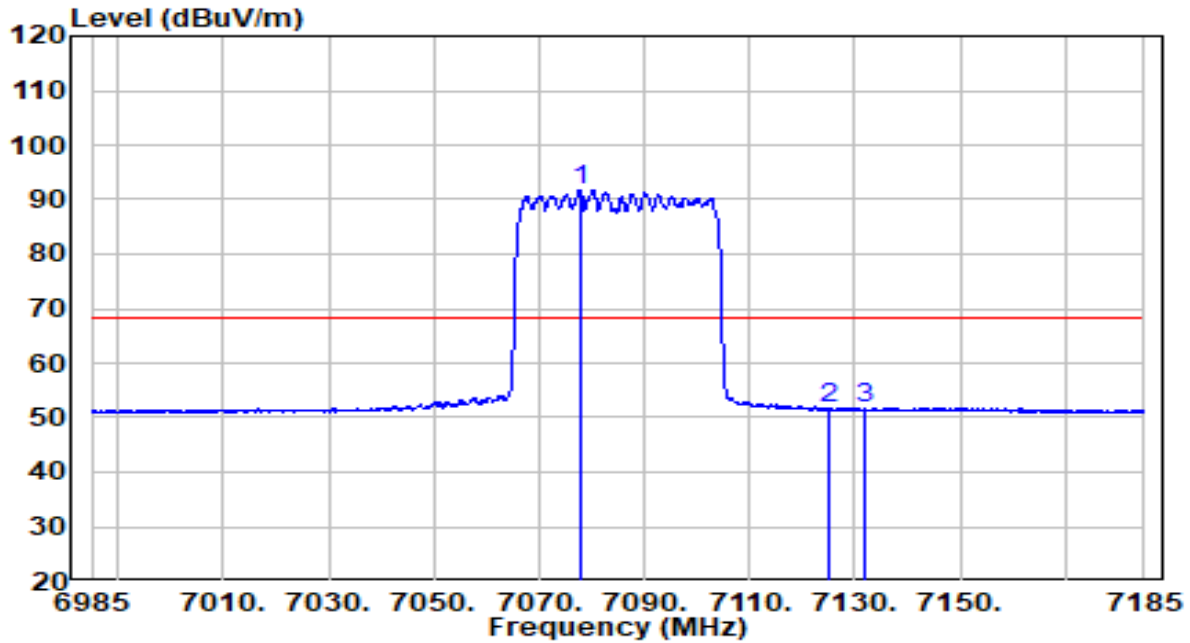


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7077.700	98.51	-6.80	91.71	N/A	N/A	Average
2	7125.000	58.33	-6.68	51.64	-16.56	68.20	Average
3	7132.000	58.40	-6.64	51.76	-16.44	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5985MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

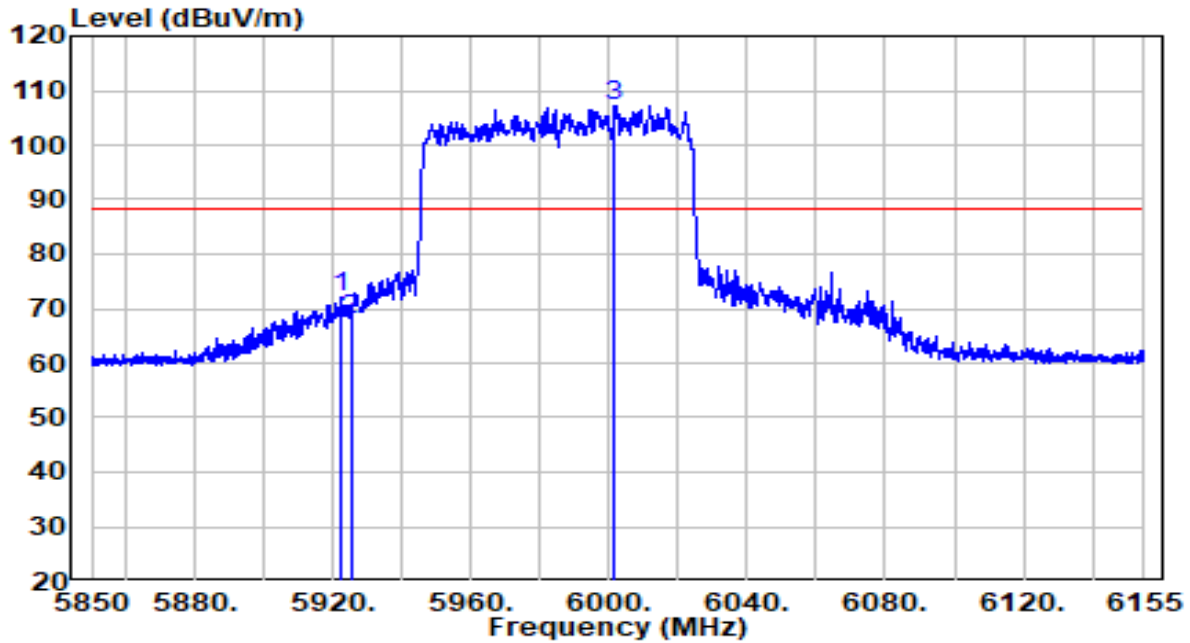


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5922.132	80.75	-8.59	72.16	-16.04	88.20	Peak
2	5925.030	76.39	-8.58	67.81	-20.39	88.20	Peak
3	* 6001.585	115.96	-8.62	107.34	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5985MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

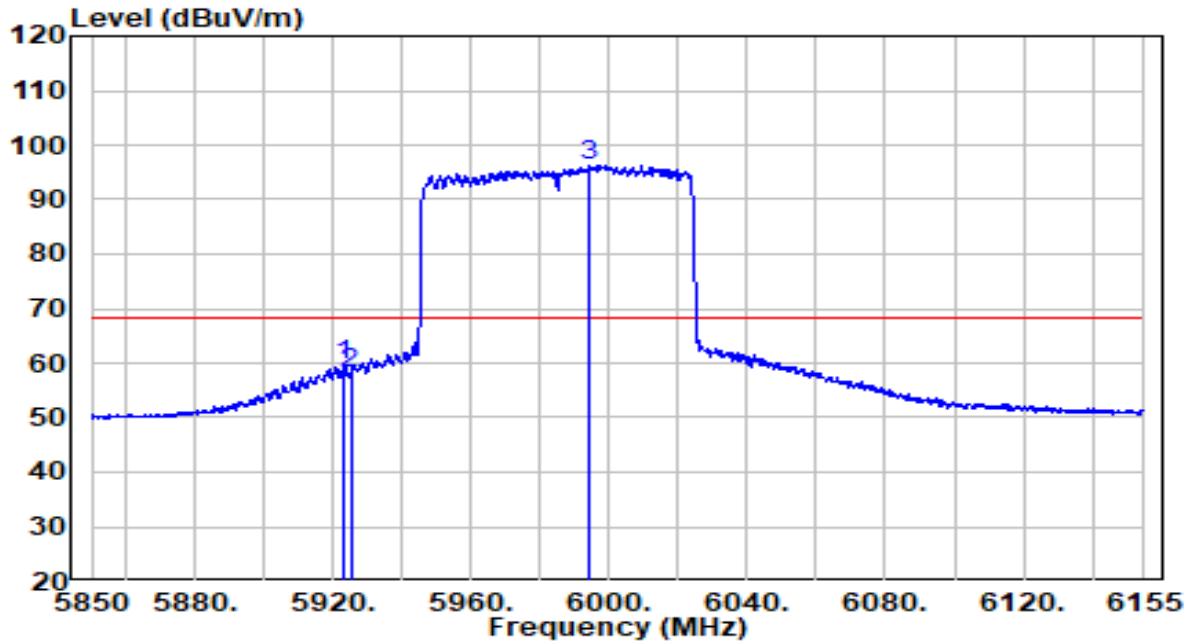


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5923.200	68.26	-8.59	59.67	-8.53	68.20	Average
2	5925.000	66.58	-8.58	58.00	-10.20	68.20	Average
3	* 5994.265	104.92	-8.63	96.30	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5985MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

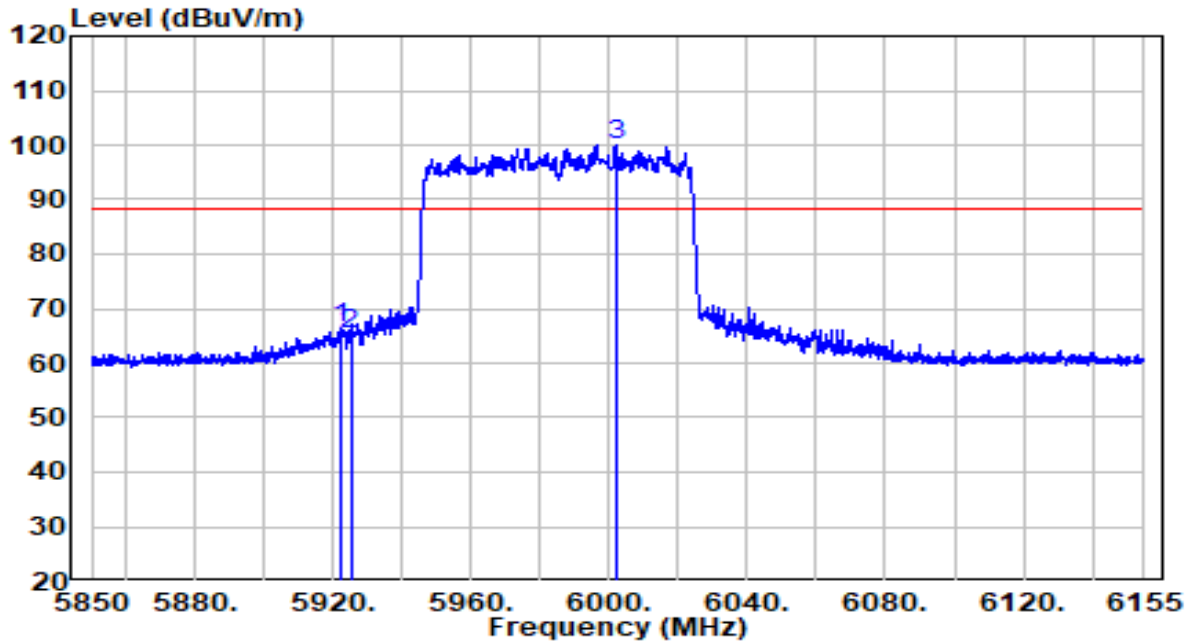


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5922.438	75.06	-8.59	66.47	-21.73	88.20	Peak
2	5925.000	73.81	-8.58	65.22	-22.98	88.20	Peak
3	* 6001.737	108.71	-8.62	100.09	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5985MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

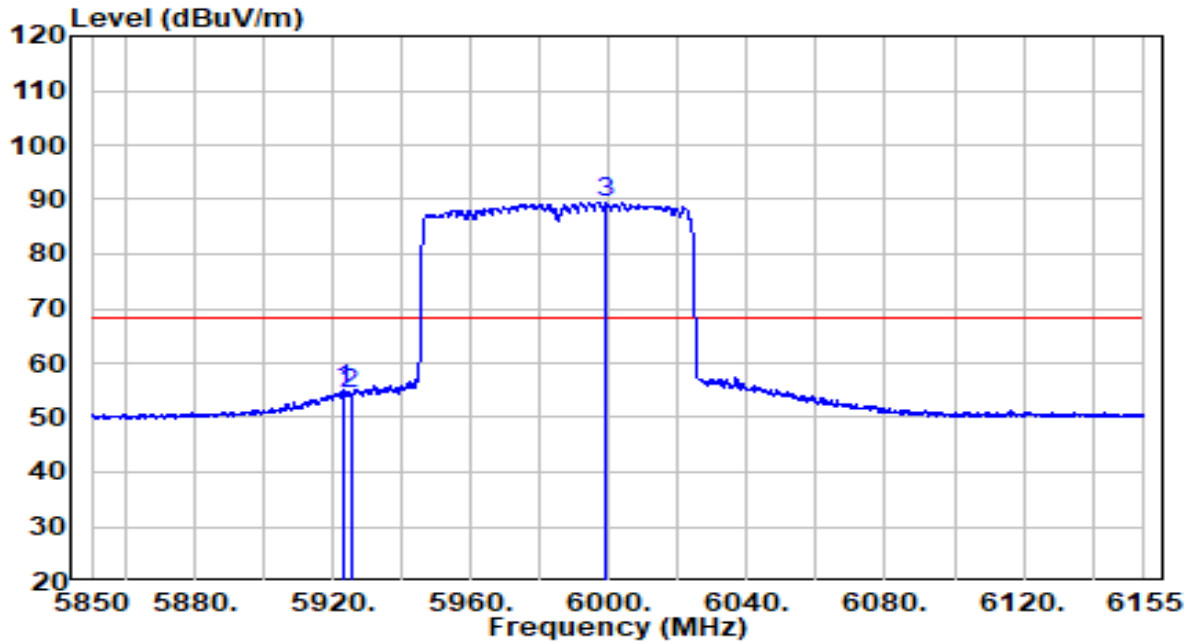


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5923.047	63.67	-8.59	55.08	-13.12	68.20	Average
2	5925.000	62.89	-8.58	54.31	-13.89	68.20	Average
3	* 5998.840	98.17	-8.62	89.54	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7025MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

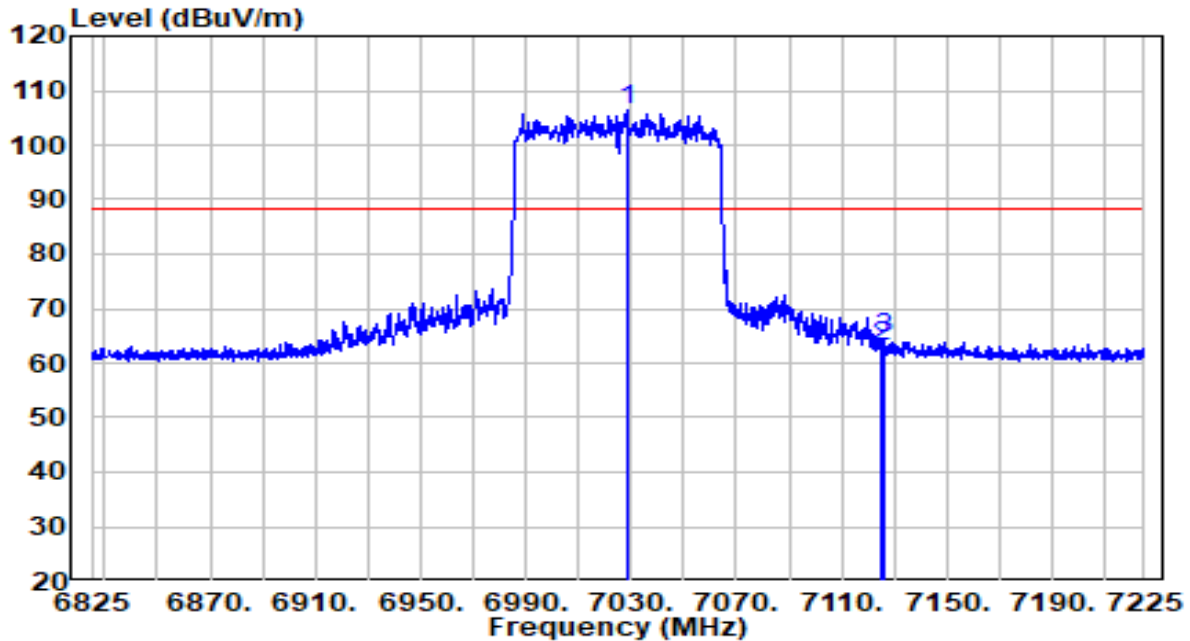


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7028.200	113.47	-6.87	106.60	N/A	N/A	Peak
2	7125.000	69.86	-6.68	63.18	-25.02	88.20	Peak
3	7126.400	71.31	-6.68	64.64	-23.56	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7025MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

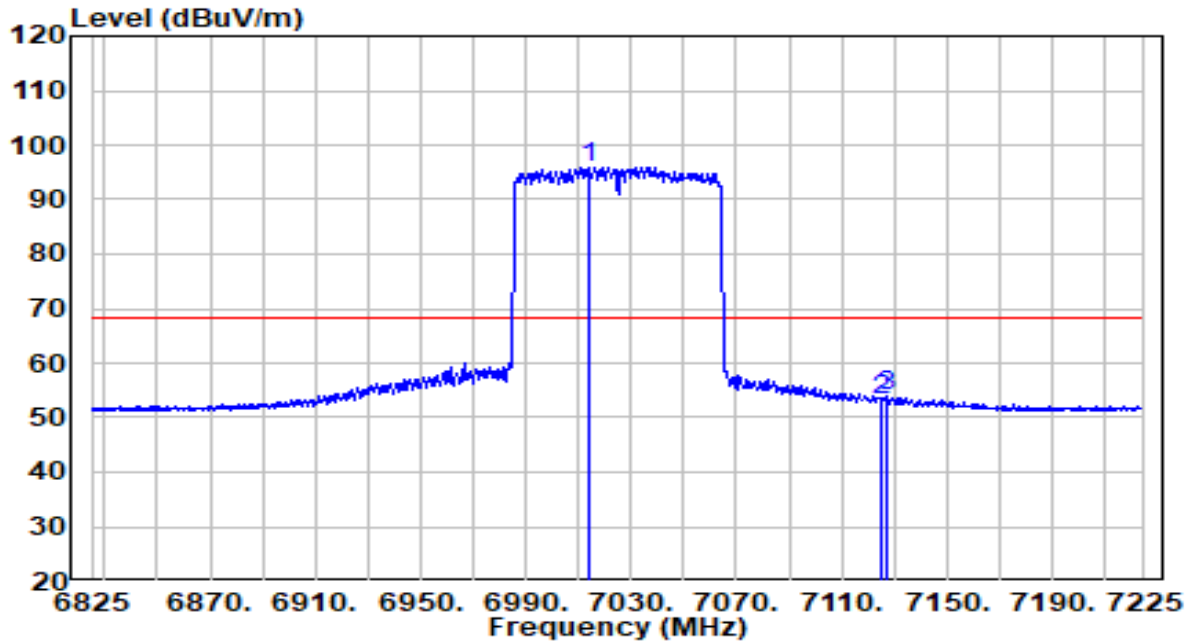


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7014.000	102.76	-6.90	95.86	N/A	N/A	Average
2	7125.000	59.76	-6.68	53.07	-15.13	68.20	Average
3	7127.000	60.53	-6.67	53.86	-14.34	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7025MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

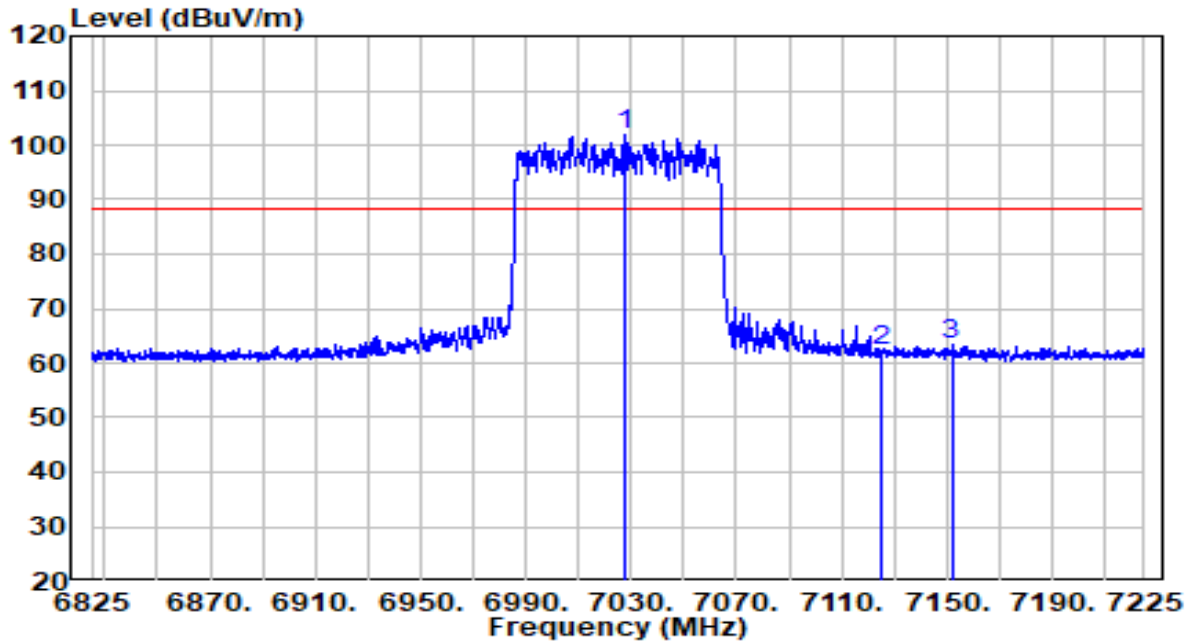


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7027.600	108.79	-6.87	101.92	N/A	N/A	Peak
2	7125.000	69.04	-6.68	62.36	-25.84	88.20	Peak
3	7151.800	70.16	-6.58	63.58	-24.62	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7025MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

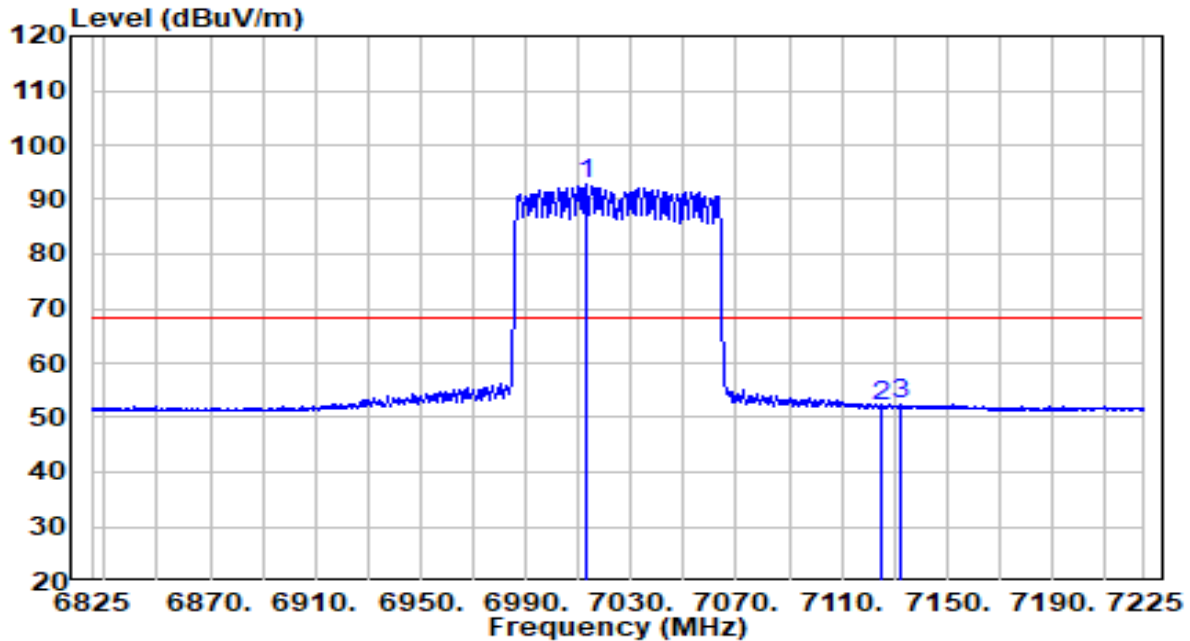


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7012.800	99.71	-6.90	92.80	N/A	N/A	Average
2	7125.000	58.91	-6.68	52.23	-15.97	68.20	Average
3	7132.200	59.02	-6.64	52.38	-15.82	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6985MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

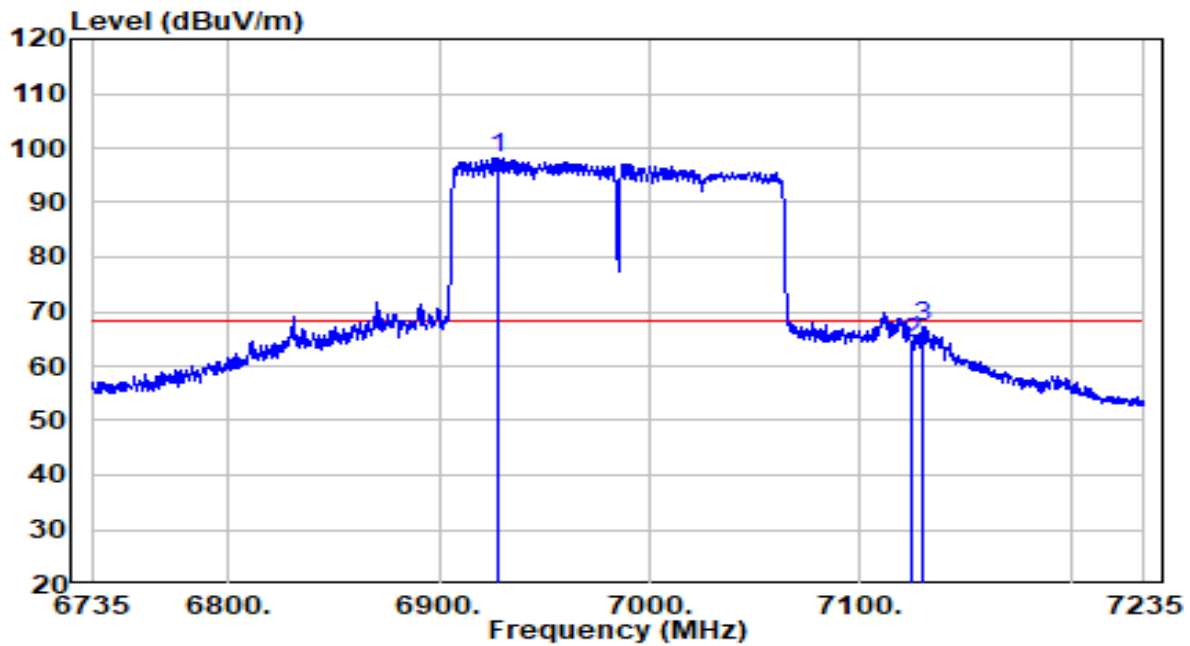


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 6927.500	105.12	-6.98	98.14	N/A	N/A	Average
2	7125.000	70.97	-6.68	64.29	-3.91	68.20	Average
3	7129.750	73.99	-6.65	67.33	-0.87	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6985MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

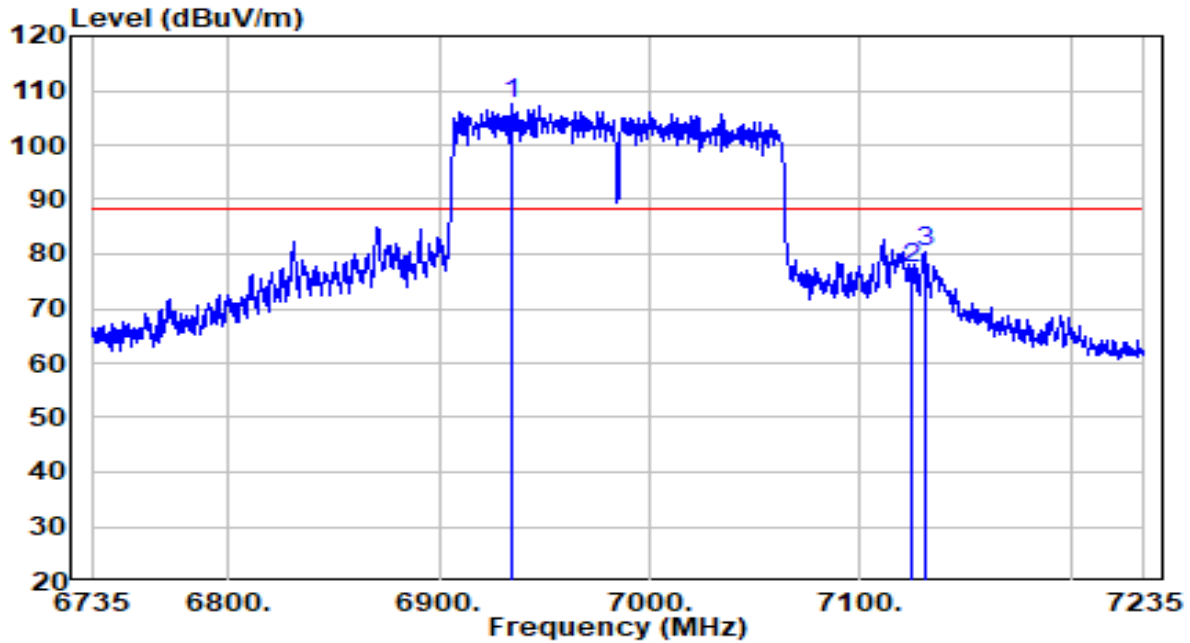


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 6934.750	114.38	-6.96	107.42	N/A	N/A	Peak
2	7125.000	83.92	-6.68	77.24	-10.96	88.20	Peak
3	7131.250	87.02	-6.64	80.38	-7.82	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6985MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

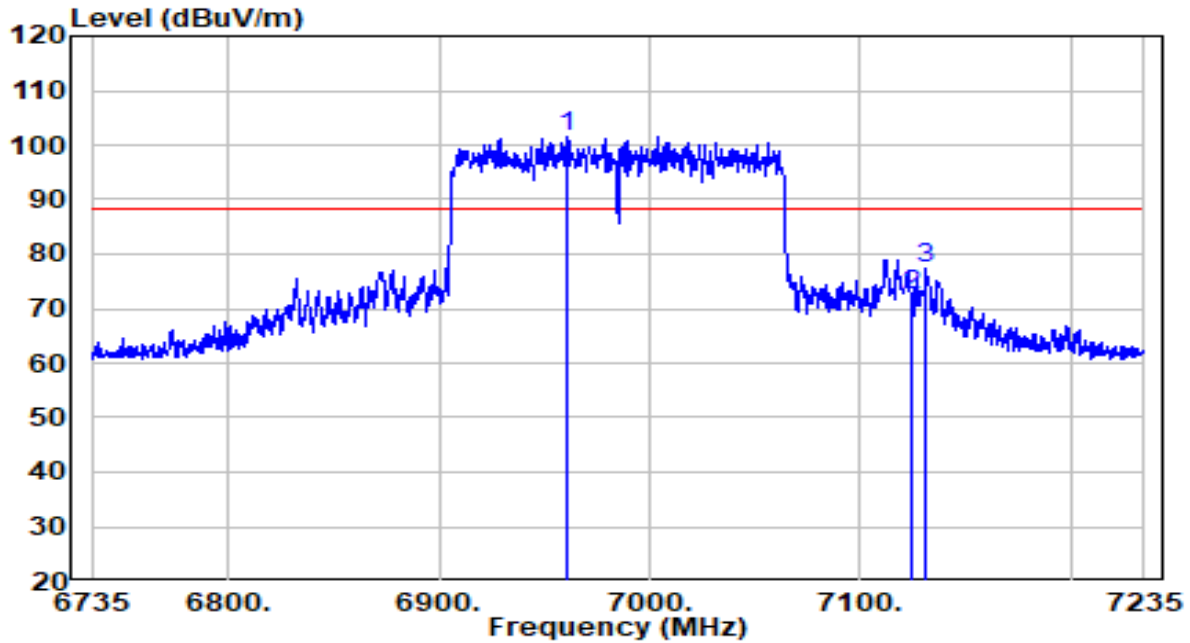


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 6961.250	108.56	-6.99	101.57	N/A	N/A	Average
2	7125.000	79.03	-6.68	72.34	-15.86	88.20	Average
3	7131.250	84.05	-6.64	77.40	-10.80	88.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6985MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

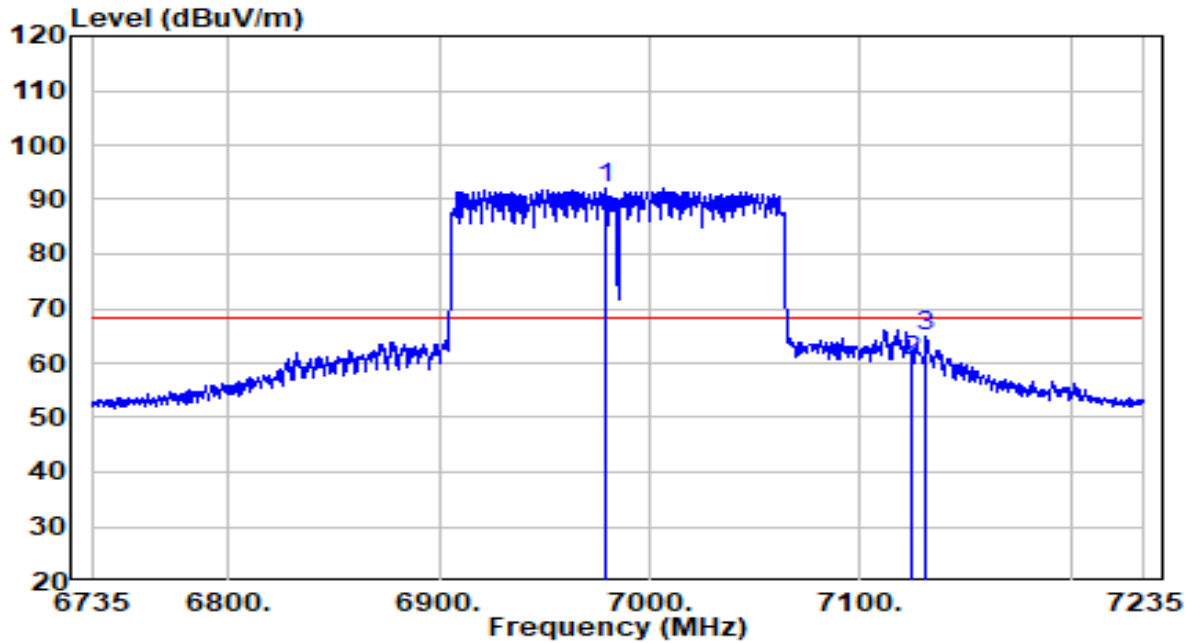


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 6978.750	98.94	-6.98	91.96	N/A	N/A	Average
2	7125.000	66.91	-6.68	60.22	-7.98	68.20	Average
3	7131.000	71.50	-6.65	64.85	-3.35	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6025MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

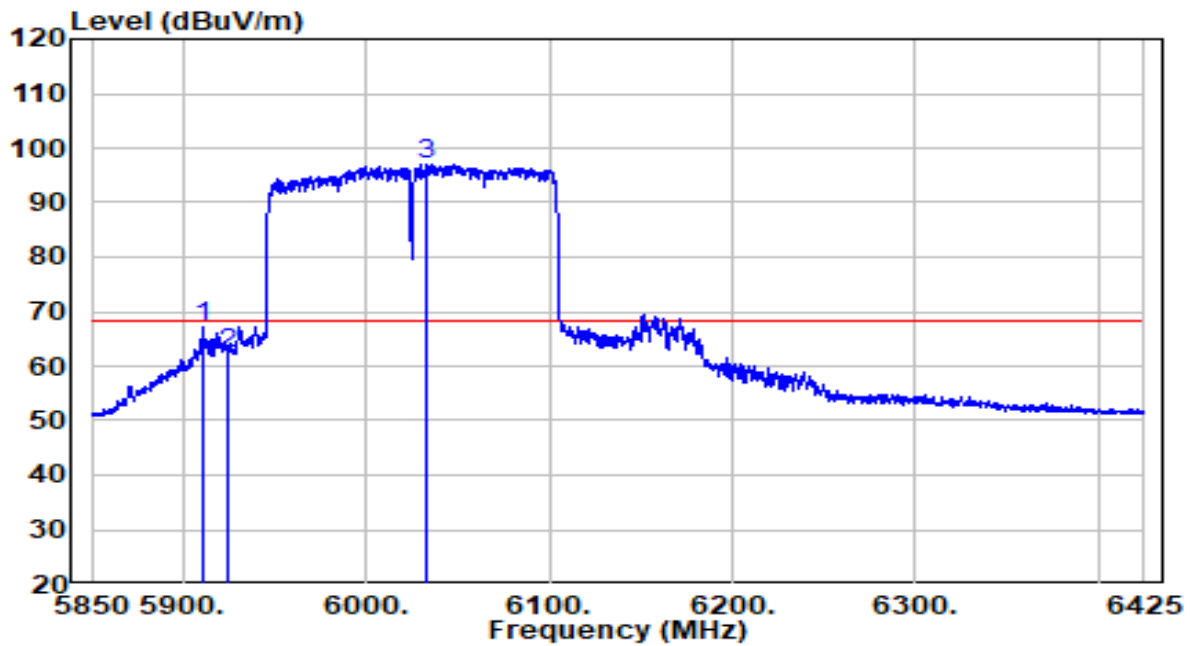


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5910.950	75.64	-8.64	67.01	-1.19	68.20	Average
2	5925.038	70.75	-8.58	62.17	-6.03	68.20	Average
3	* 6032.850	105.39	-8.51	96.88	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6025MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

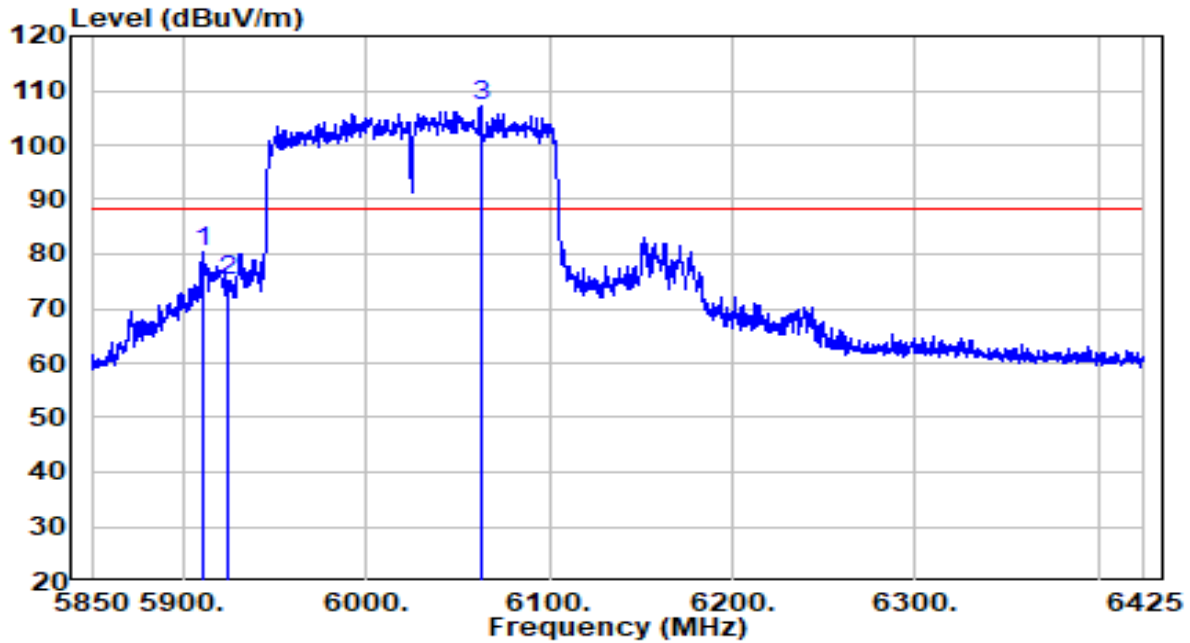


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5911.237	89.12	-8.64	80.49	-7.71	88.20	Peak
2	5925.000	83.54	-8.58	74.96	-13.24	88.20	Peak
3	* 6062.462	115.68	-8.48	107.20	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6025MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

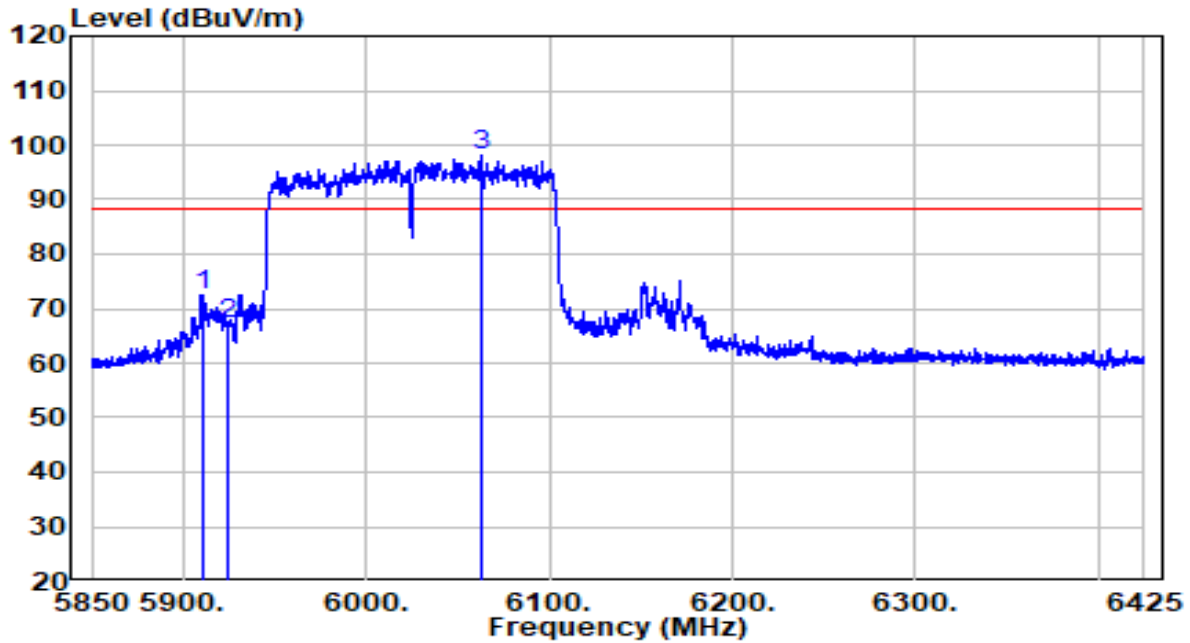


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5911.237	81.27	-8.64	72.64	-15.56	88.20	Peak
2	5925.000	75.60	-8.58	67.02	-21.18	88.20	Peak
3	* 6062.462	106.48	-8.48	98.00	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6025MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

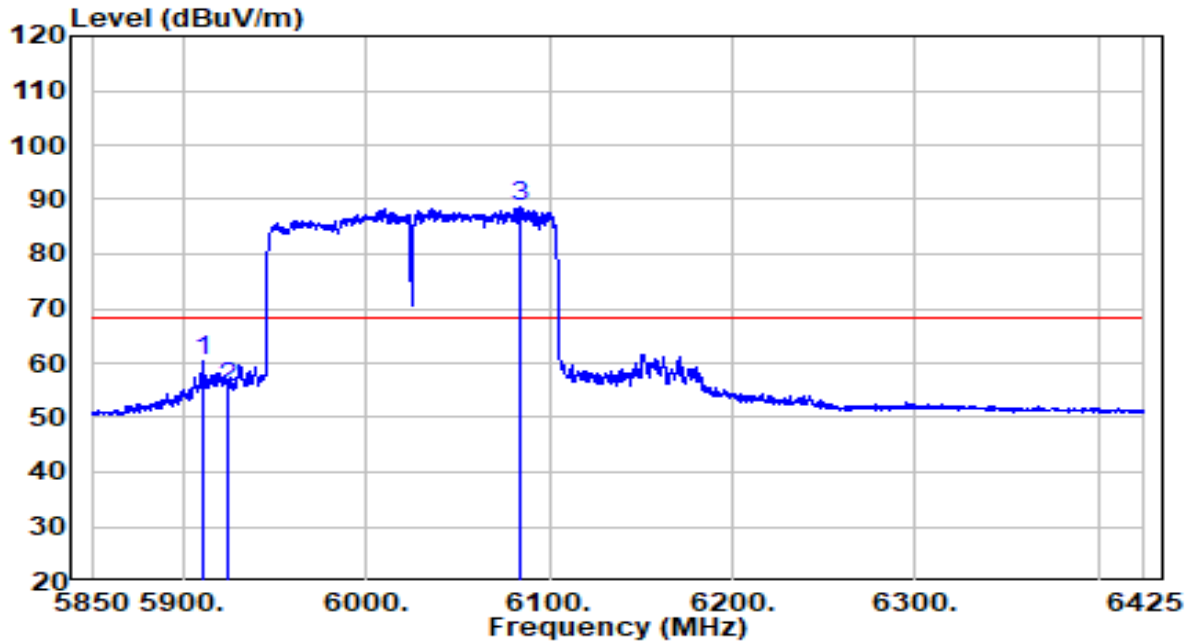


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5910.950	68.86	-8.64	60.22	-7.98	68.20	Average
2	5925.000	64.23	-8.58	55.65	-12.55	68.20	Average
3	* 6083.450	97.06	-8.43	88.62	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

**Sunyear Filter N<sub>SS</sub>=2**

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5955MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

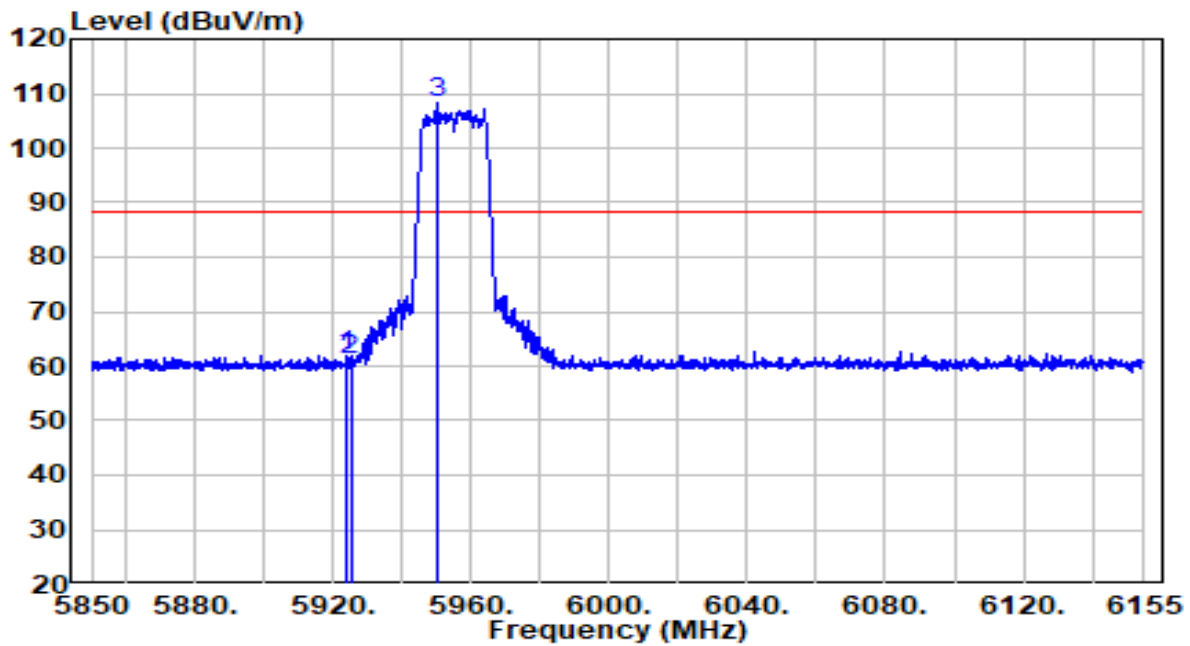


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5923.810	70.60	-8.59	62.01	-26.19	88.20	Peak
2	5925.000	69.87	-8.58	61.29	-26.91	88.20	Peak
3	* 5950.040	116.75	-8.63	108.12	N/A	N/A	Peak

**Note:**

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5955MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

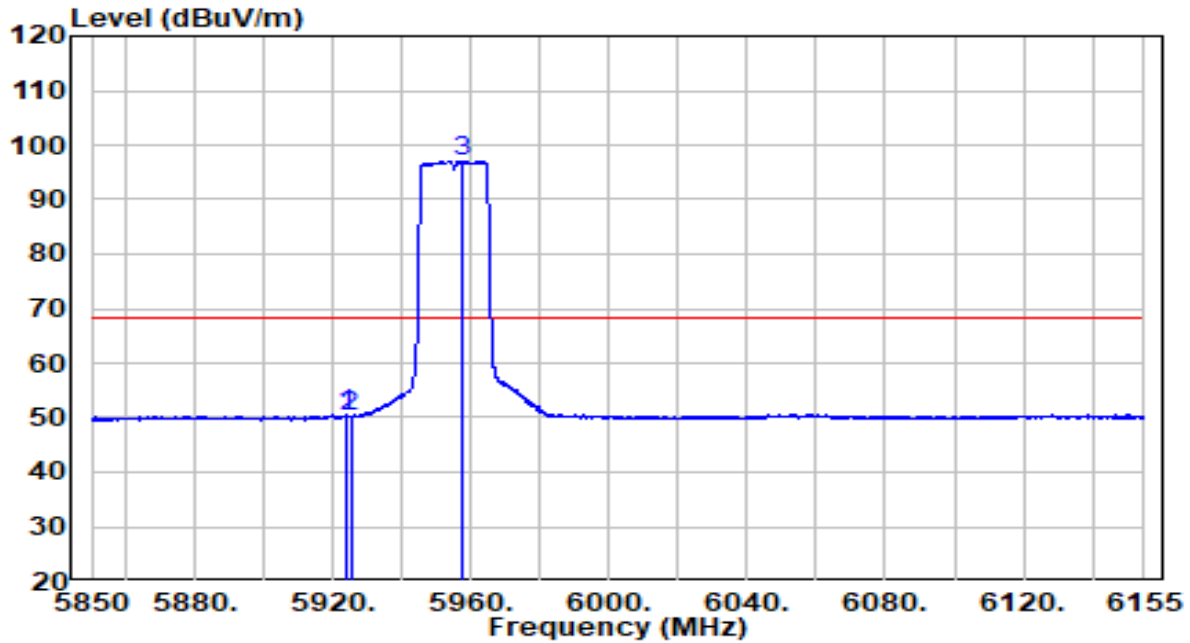


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5923.658	59.07	-8.59	50.48	-17.72	68.20	Average
2	5925.000	58.74	-8.58	50.15	-18.05	68.20	Average
3	* 5957.665	105.82	-8.65	97.17	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5955MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

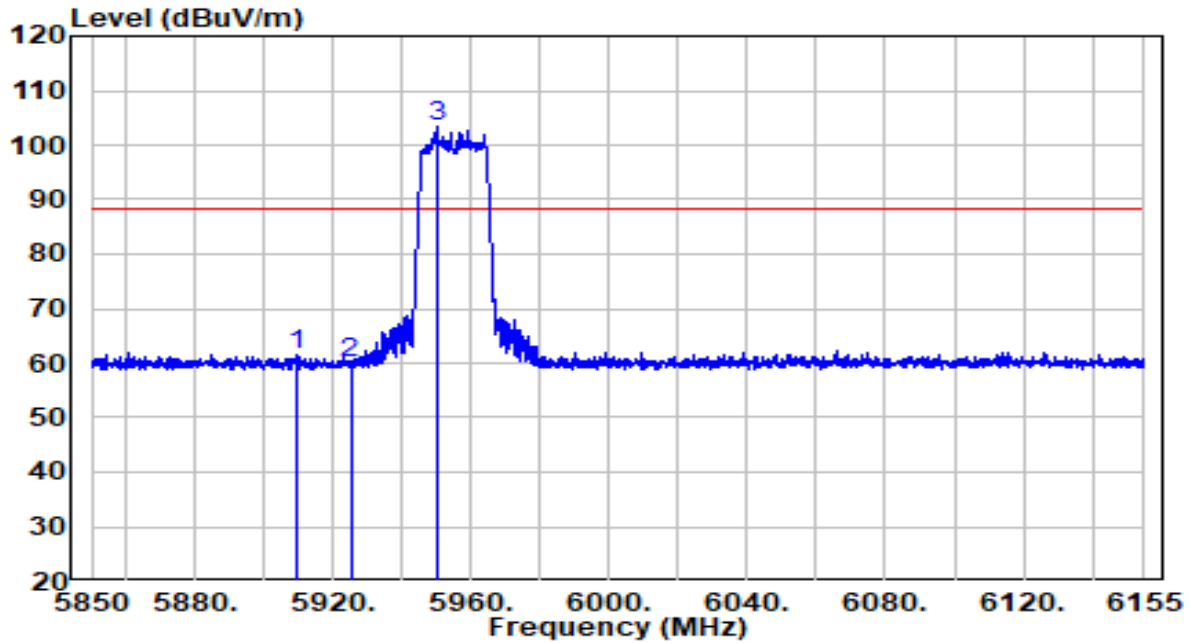


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5909.780	70.02	-8.64	61.39	-26.81	88.20	Peak
2	5925.000	68.47	-8.58	59.89	-28.31	88.20	Peak
3	* 5950.192	111.96	-8.63	103.33	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5955MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

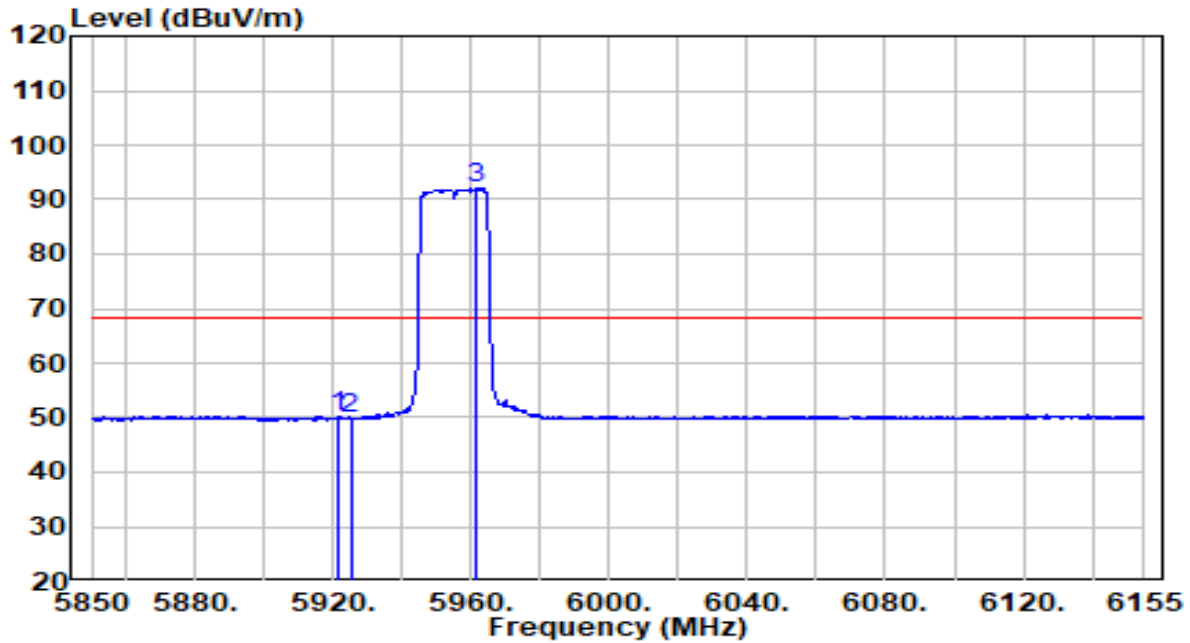


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5921.522	58.84	-8.60	50.24	-17.96	68.20	Average
2	5925.000	58.37	-8.58	49.79	-18.41	68.20	Average
3	* 5961.630	100.77	-8.65	92.12	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7095MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

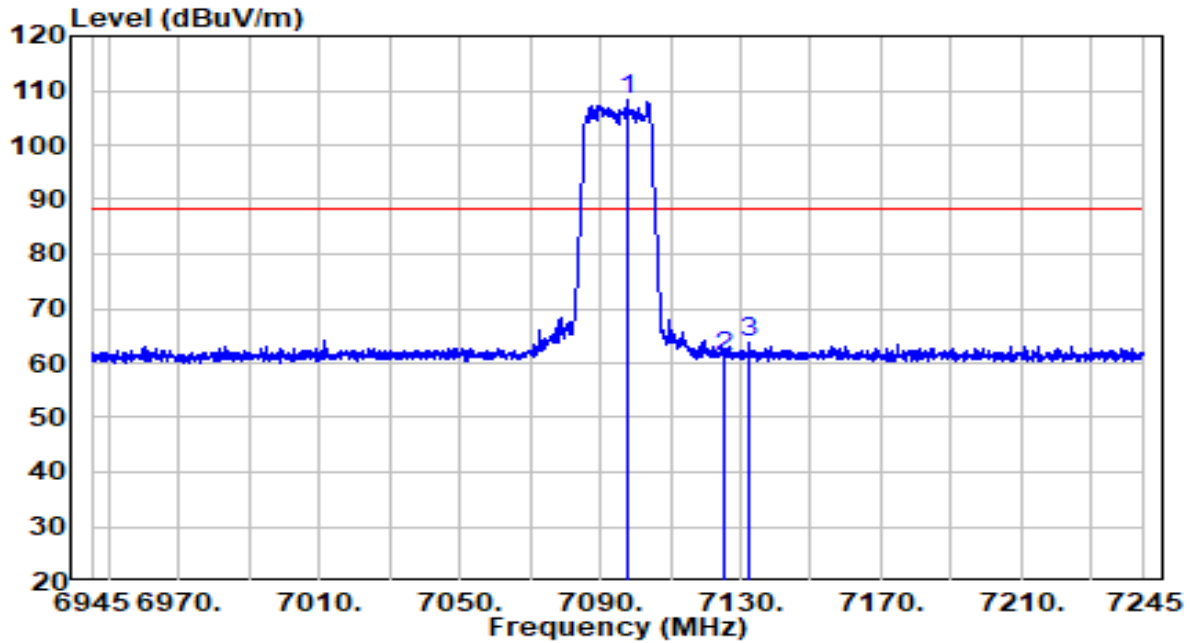


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7097.550	115.08	-6.74	108.34	N/A	N/A	Peak
2	7125.000	67.83	-6.68	61.15	-27.05	88.20	Peak
3	7132.650	70.42	-6.64	63.78	-24.42	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7095MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

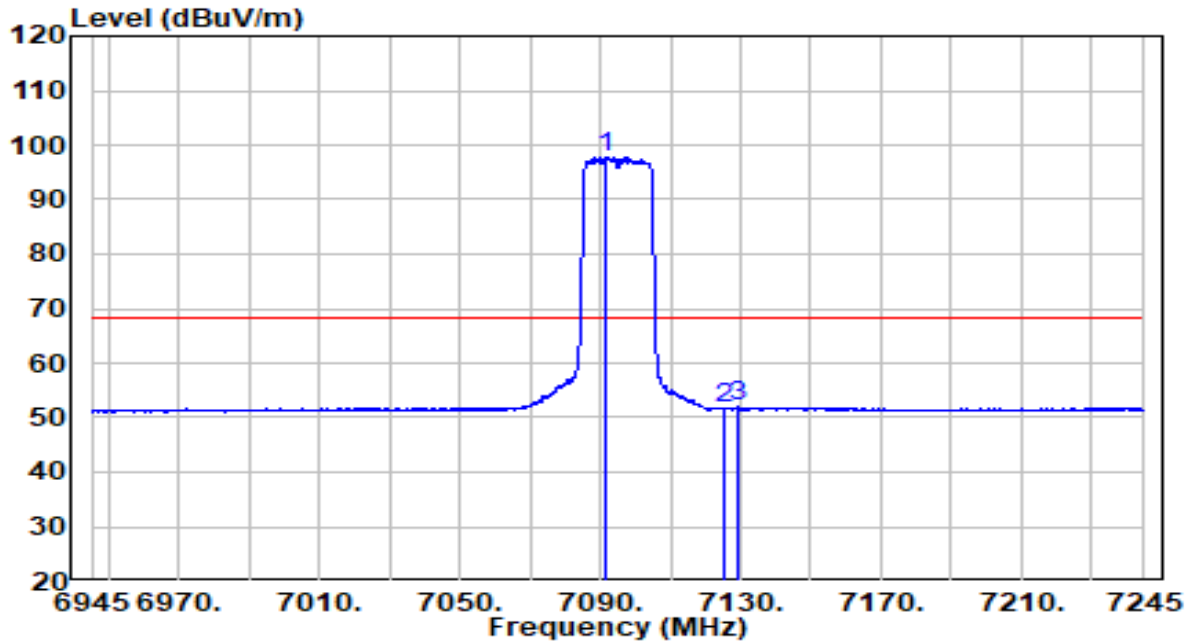


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7091.400	104.55	-6.76	97.78	N/A	N/A	Average
2	7125.000	58.45	-6.68	51.77	-16.43	68.20	Average
3	7129.200	58.58	-6.66	51.92	-16.28	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7095MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

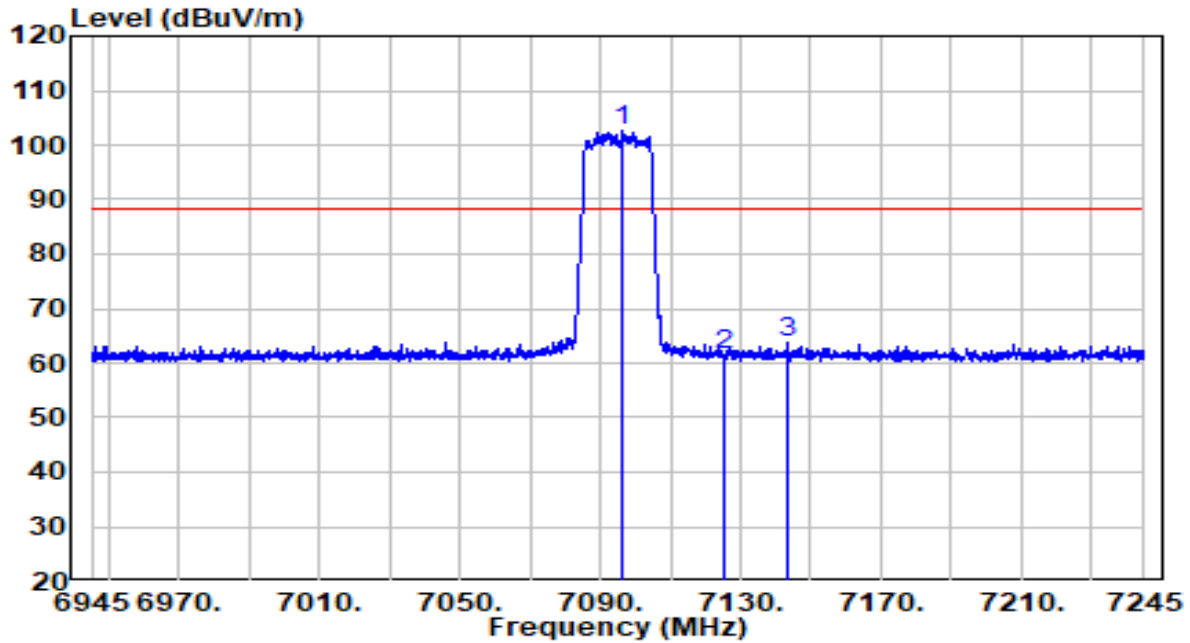


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7096.350	109.34	-6.74	102.60	N/A	N/A	Peak
2	7125.000	68.27	-6.68	61.59	-26.61	88.20	Peak
3	7143.150	70.25	-6.60	63.65	-24.55	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7095MHz by 802.11ax-HE20	Test Voltage	120V/60Hz

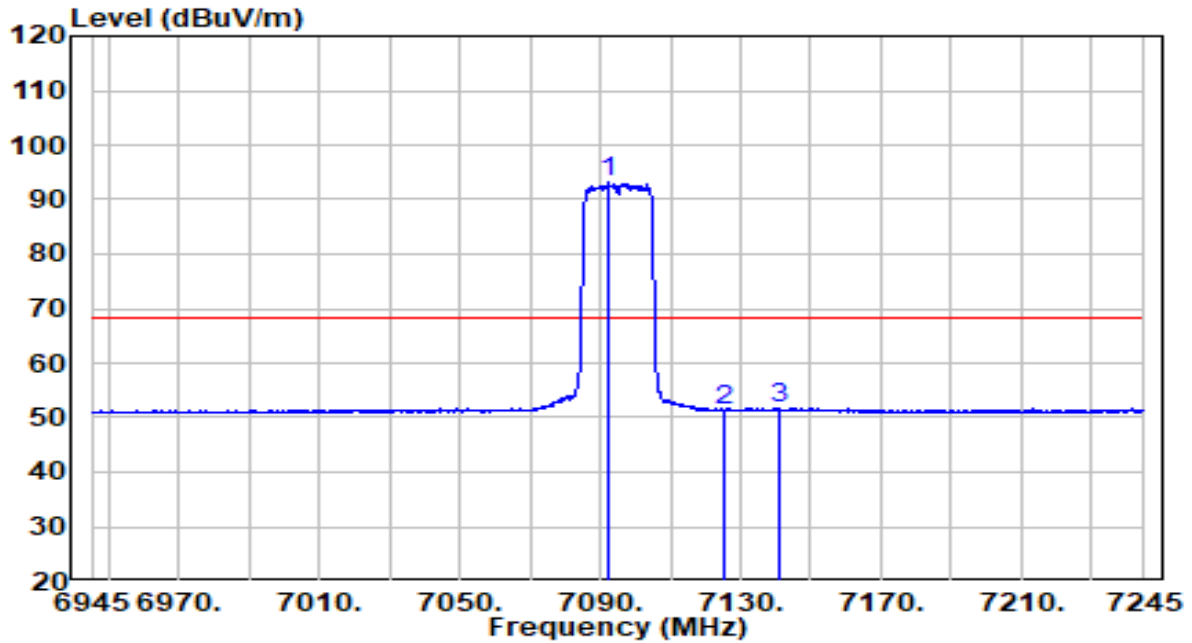


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7092.450	99.87	-6.76	93.11	N/A	N/A	Average
2	7125.000	57.99	-6.68	51.30	-16.90	68.20	Average
3	7140.750	58.29	-6.60	51.69	-16.51	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5965MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

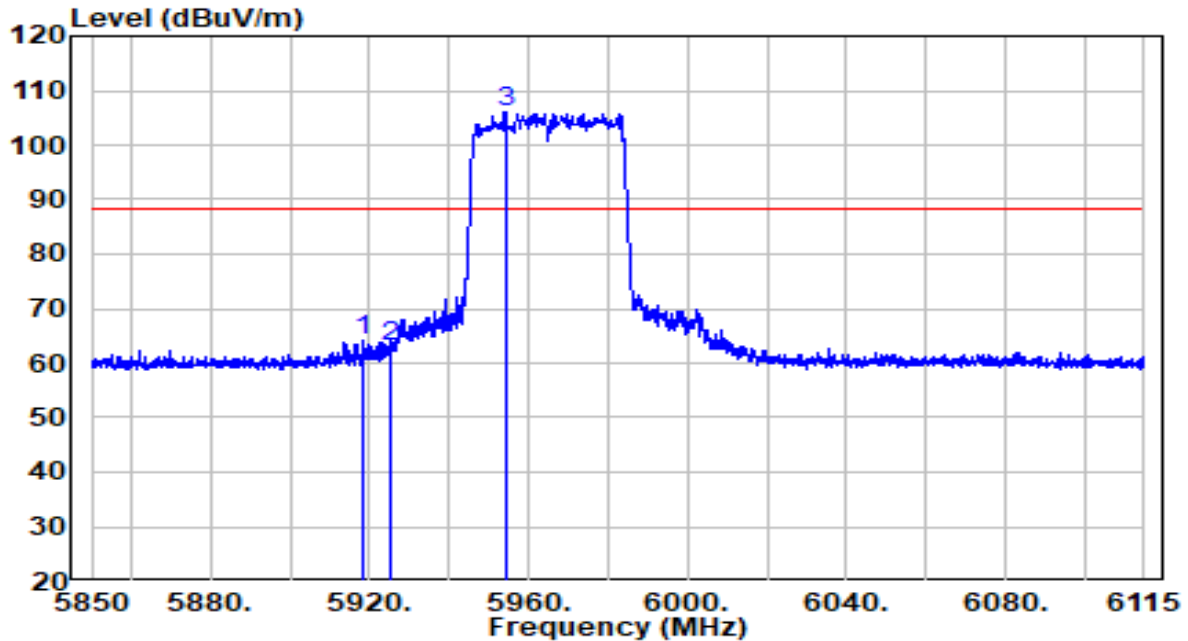


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5918.237	72.68	-8.61	64.07	-24.13	88.20	Peak
2	5925.000	71.70	-8.58	63.12	-25.08	88.20	Peak
3	* 5954.145	114.56	-8.64	105.92	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5965MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

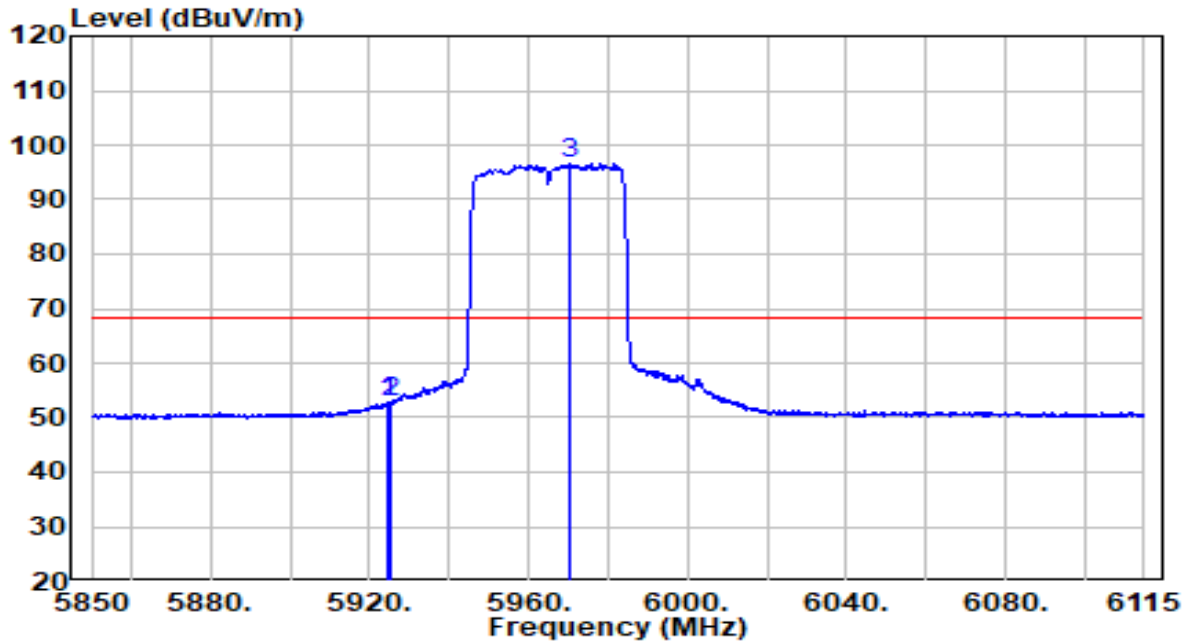


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5924.598	61.59	-8.58	53.00	-15.20	68.20	Average
2	5925.000	61.24	-8.58	52.66	-15.54	68.20	Average
3	* 5970.442	105.19	-8.65	96.54	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5965MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

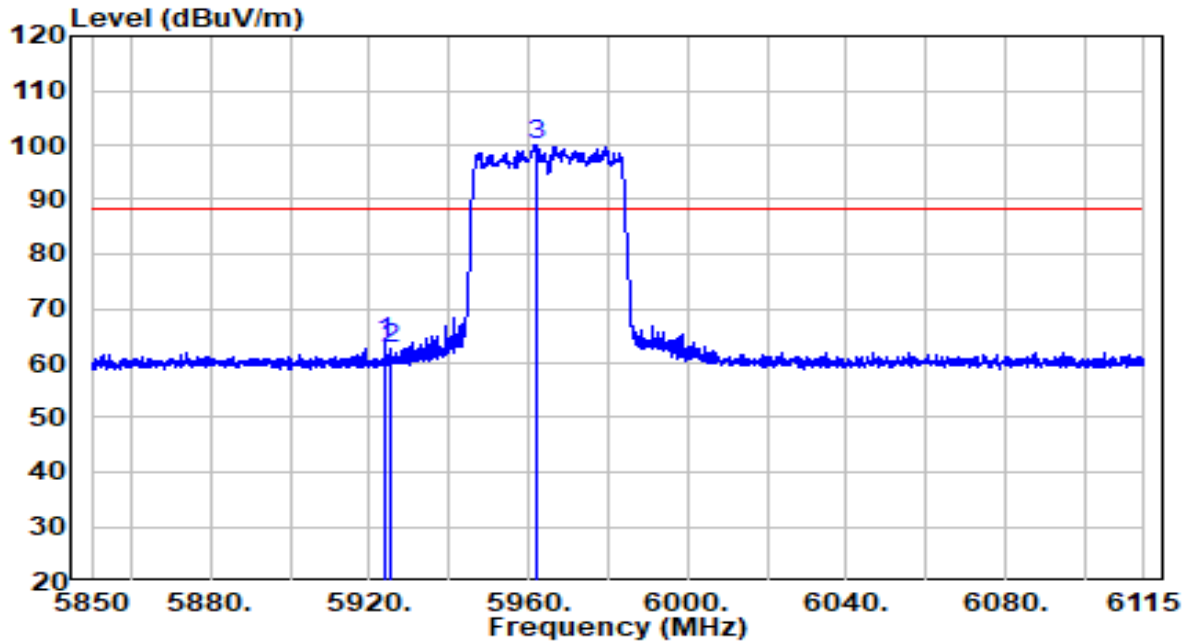


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5923.670	72.18	-8.59	63.59	-24.61	88.20	Peak
2	5925.000	71.14	-8.58	62.56	-25.64	88.20	Peak
3	* 5962.360	108.82	-8.66	100.17	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5965MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

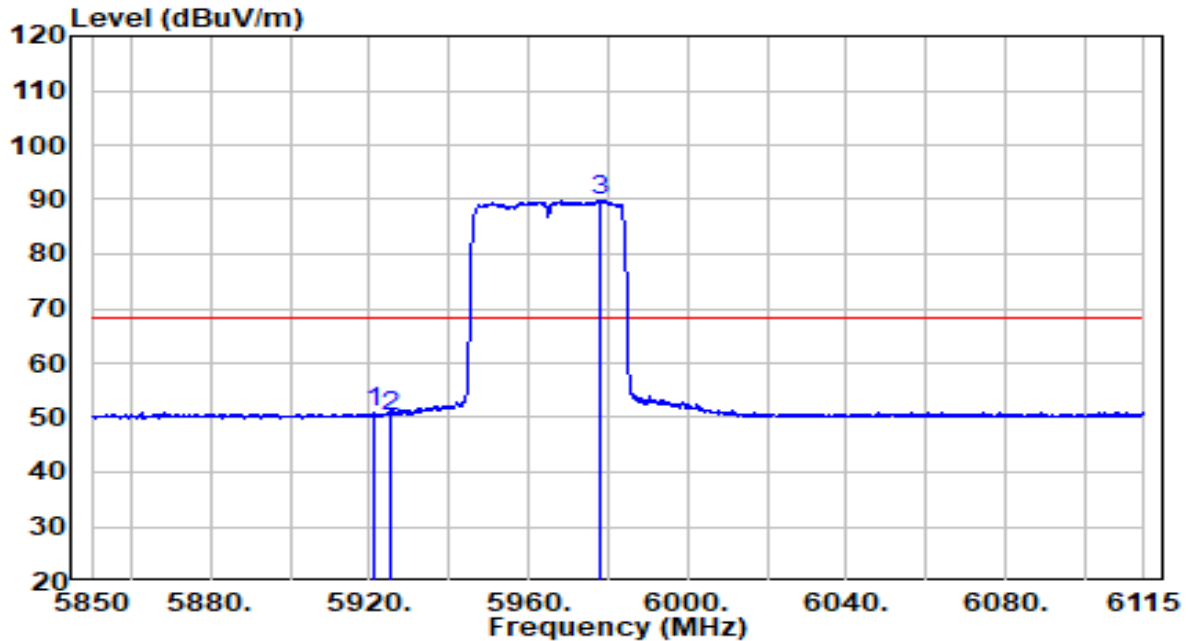


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5921.020	59.42	-8.60	50.82	-17.38	68.20	Average
2	5925.000	58.86	-8.58	50.28	-17.92	68.20	Average
3	* 5977.730	98.60	-8.64	89.96	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7085MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

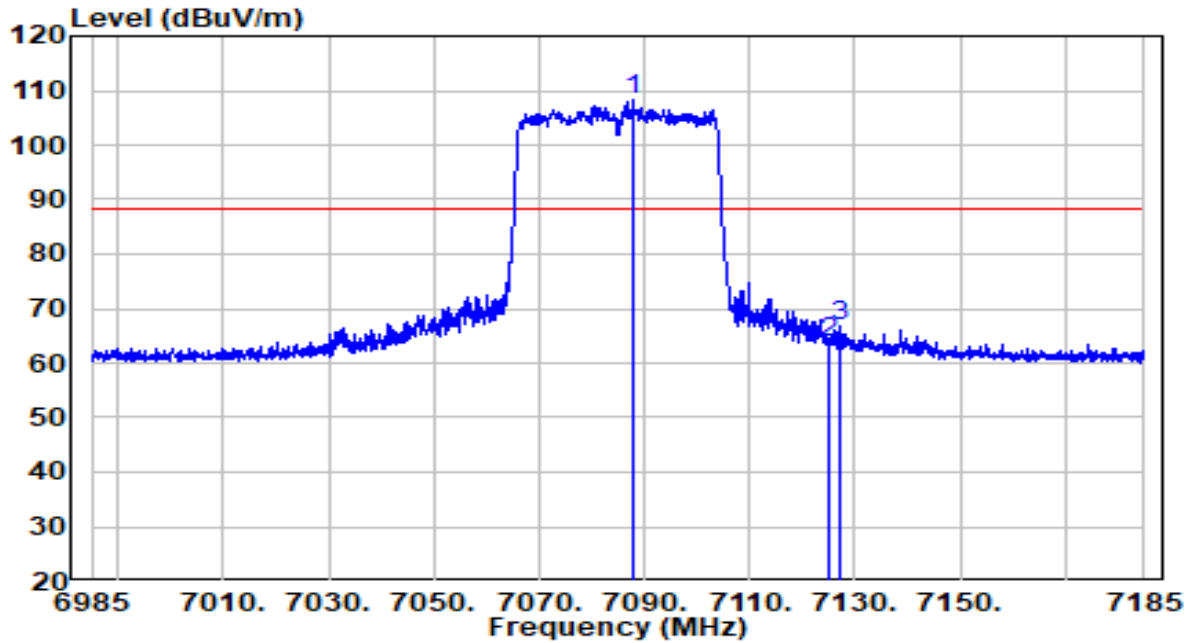


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7088.000	115.09	-6.78	108.31	N/A	N/A	Peak
2	7125.000	70.37	-6.68	63.68	-24.52	88.20	Peak
3	7127.400	73.61	-6.67	66.94	-21.26	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7085MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

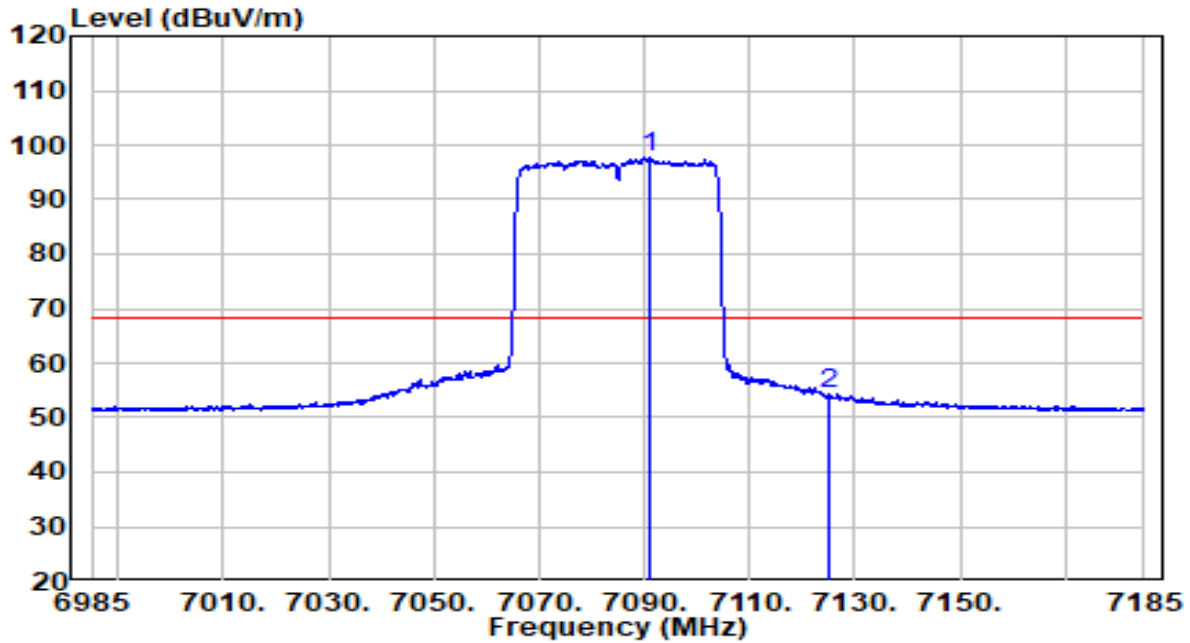


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	104.43	-6.77	97.67	N/A	N/A	Average
2		61.09	-6.68	54.40	-13.80	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7085MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

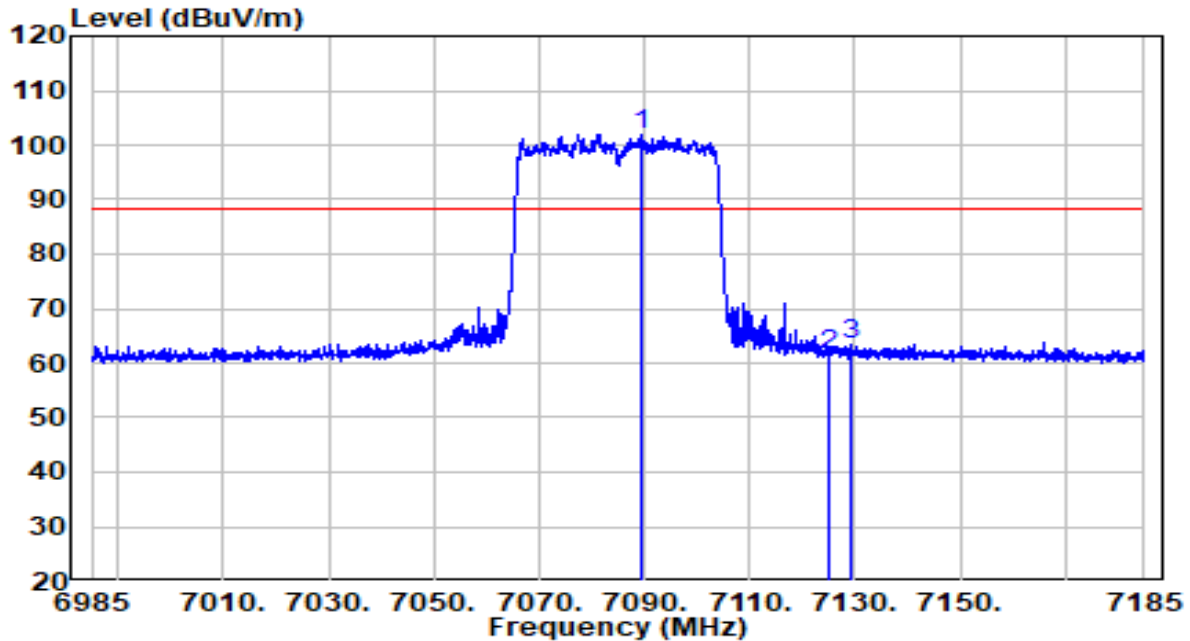


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7089.600	108.71	-6.77	101.94	N/A	N/A	Peak
2	7125.000	68.37	-6.68	61.68	-26.52	88.20	Peak
3	7129.500	70.13	-6.66	63.47	-24.73	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7085MHz by 802.11ax-HE40	Test Voltage	120V/60Hz

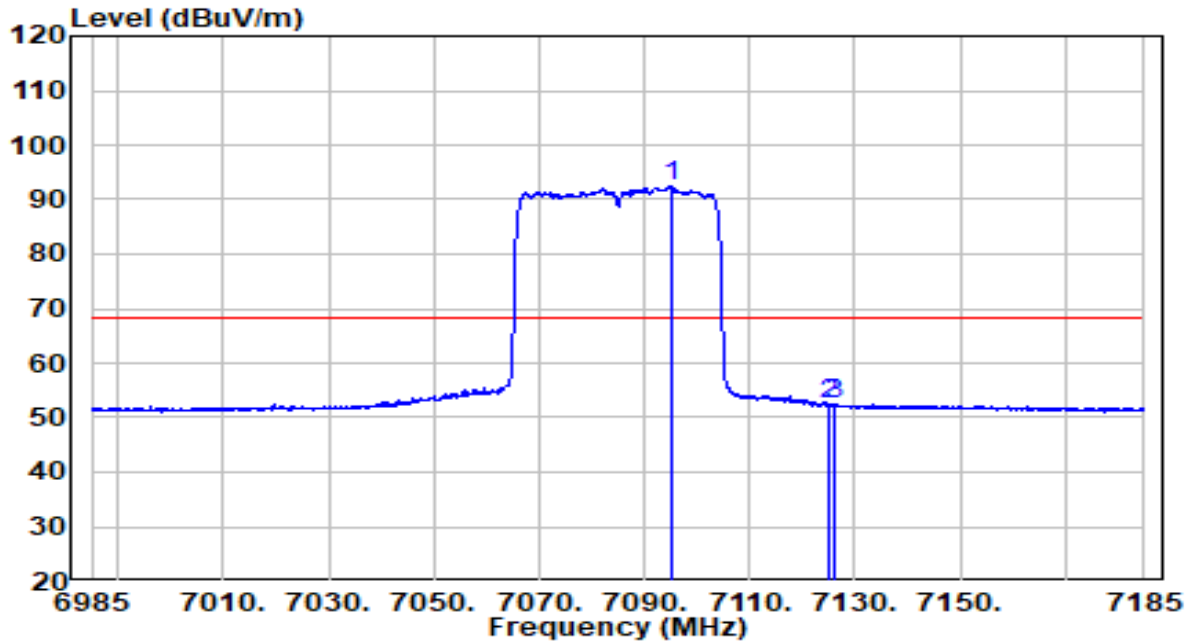


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7095.200	99.21	-6.75	92.46	N/A	N/A	Average
2	7125.000	59.07	-6.68	52.39	-15.81	68.20	Average
3	7126.300	59.10	-6.68	52.42	-15.78	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5985MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

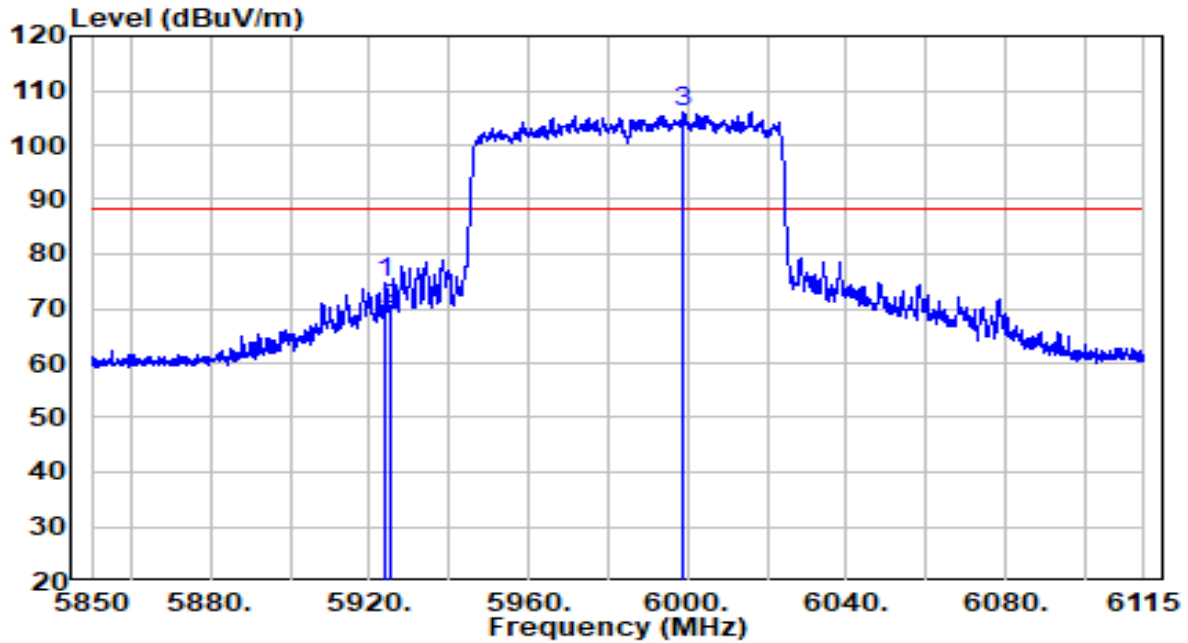


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5923.935	83.19	-8.59	74.61	-13.59	88.20	Peak
2	5925.000	78.57	-8.58	69.99	-18.21	88.20	Peak
3	* 5998.797	114.84	-8.62	106.22	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5985MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

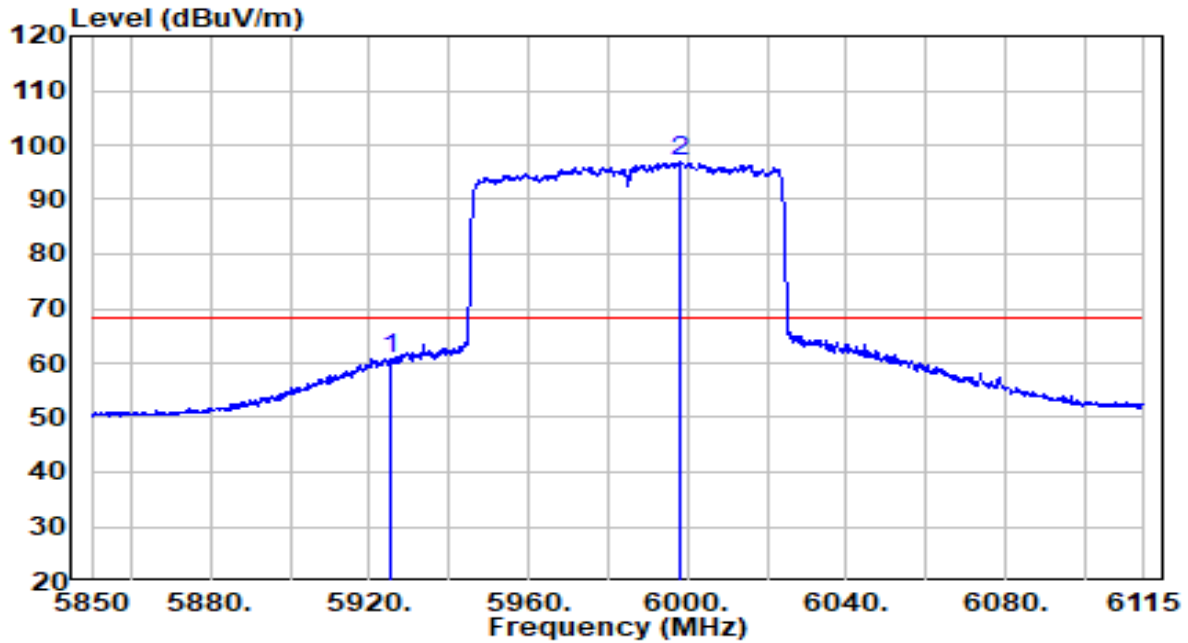


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5925.000	69.25	-8.58	60.67	-7.53	68.20	Average
2	* 5997.870	105.70	-8.62	97.07	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5985MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

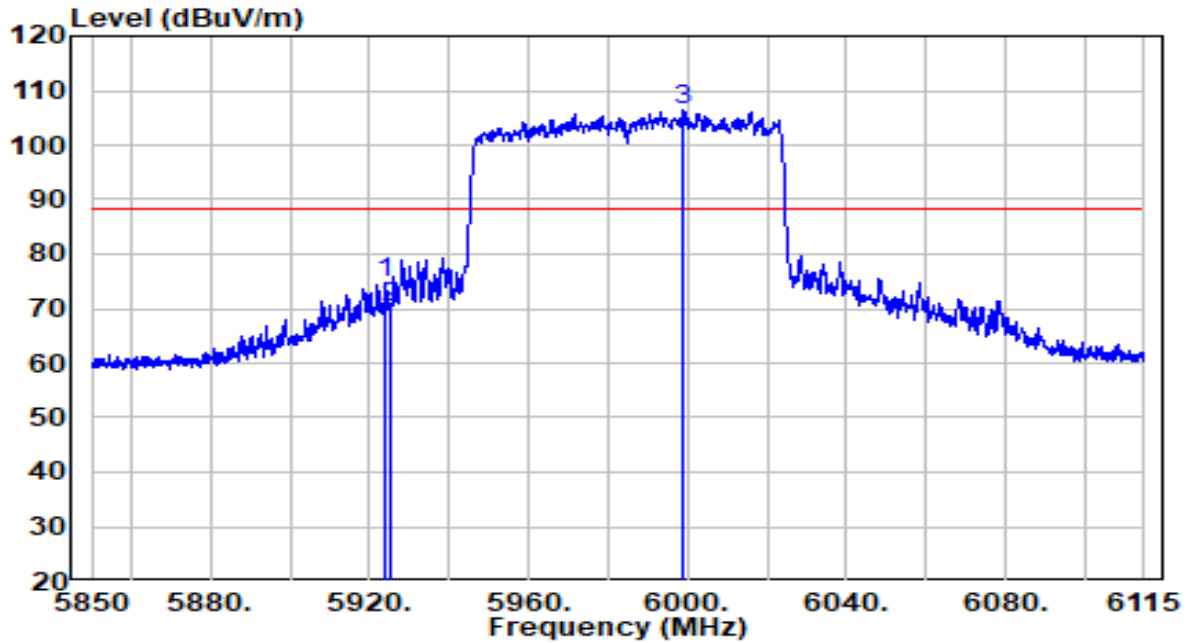


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5923.803	83.47	-8.59	74.89	-13.31	88.20	Peak
2	5925.000	78.90	-8.58	70.32	-17.88	88.20	Peak
3	* 5998.665	115.04	-8.62	106.42	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 5985MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

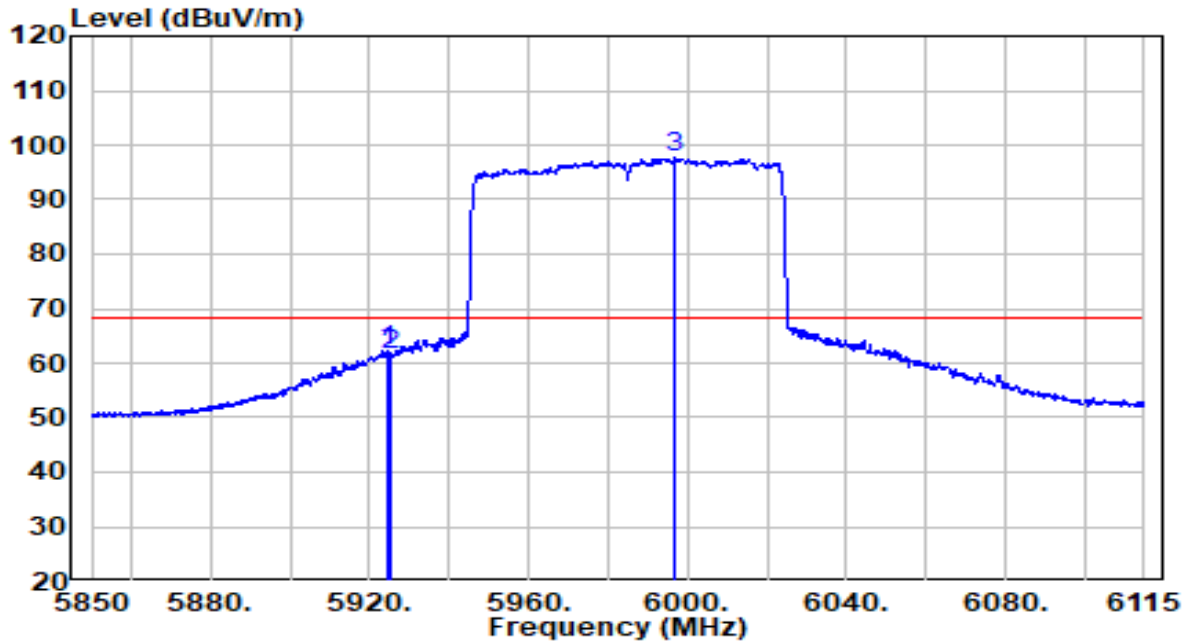


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5924.333	70.89	-8.58	62.30	-5.90	68.20	Average
2	5925.000	70.17	-8.58	61.59	-6.61	68.20	Average
3	* 5997.075	106.29	-8.62	97.67	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7025MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

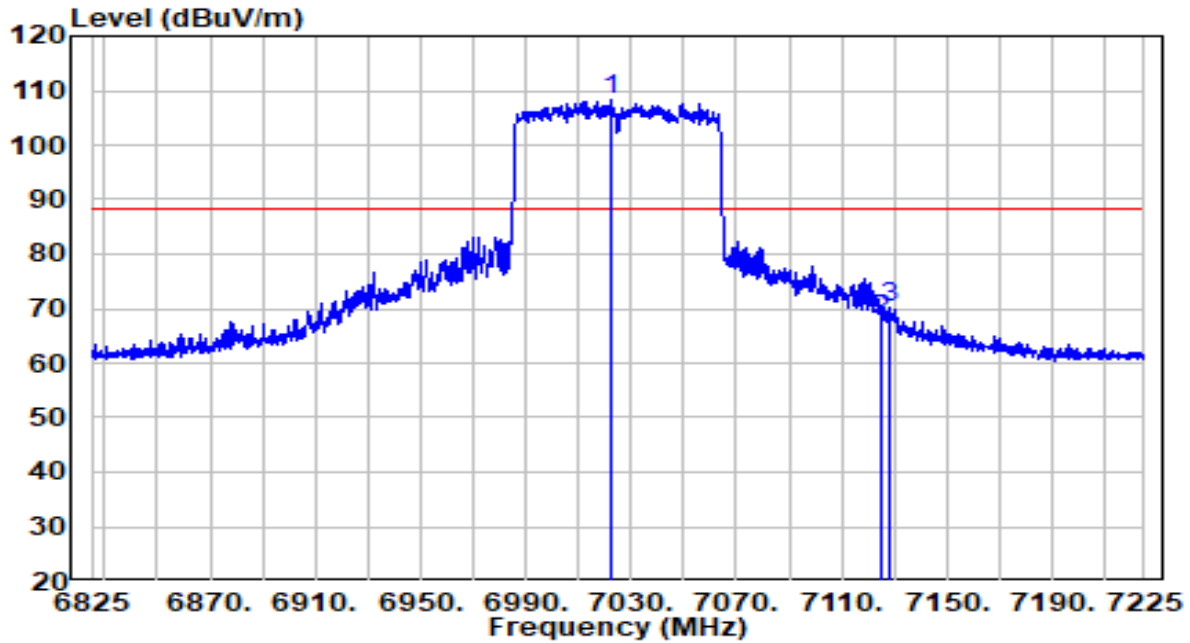


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 7022.800	115.03	-6.87	108.16	N/A	N/A	Peak
2	7125.000	74.77	-6.68	68.08	-20.12	88.20	Peak
3	7128.400	76.91	-6.66	70.25	-17.95	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7025MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

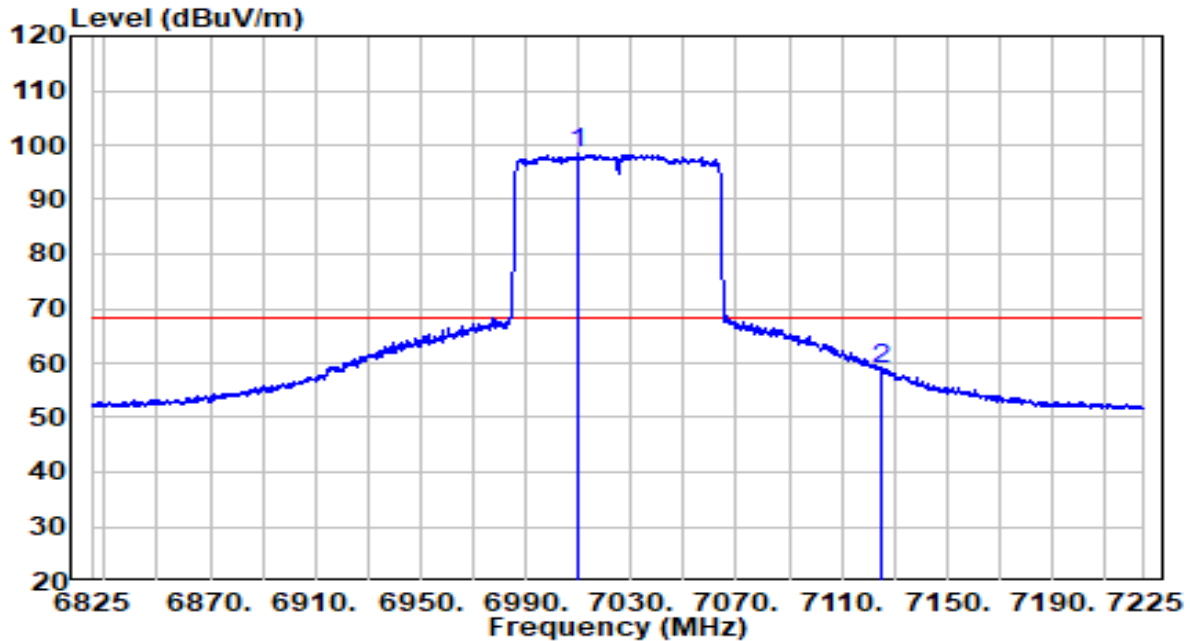


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	105.28	-6.93	98.35	N/A	N/A	Average
2		65.45	-6.68	58.77	-9.43	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7025MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

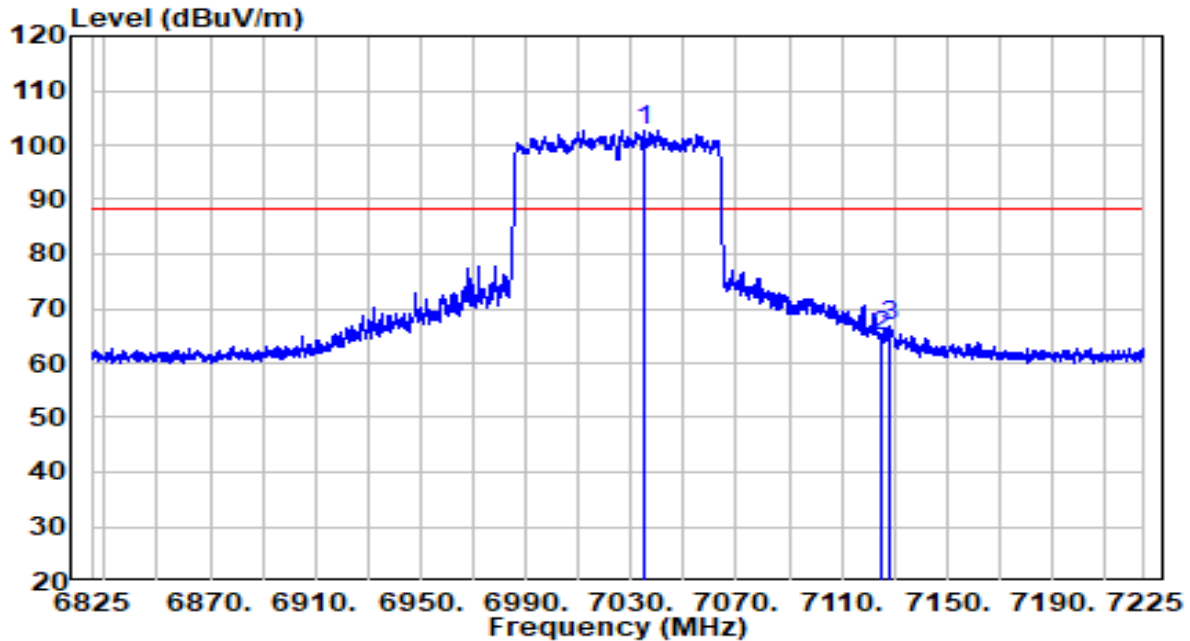


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7034.800	109.66	-6.88	102.78	N/A	N/A	Peak
2	7125.000	71.65	-6.68	64.97	-23.23	88.20	Peak
3	7128.000	73.36	-6.66	66.70	-21.50	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 7025MHz by 802.11ax-HE80	Test Voltage	120V/60Hz

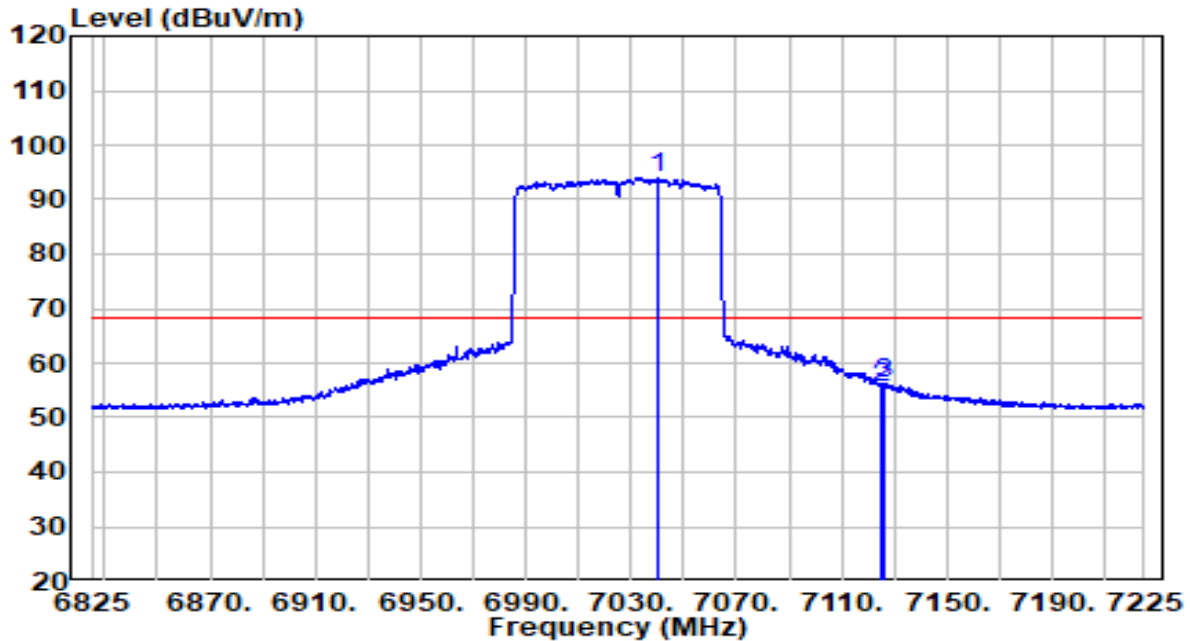


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 7039.800	100.94	-6.86	94.08	N/A	N/A	Average
2	7125.000	62.22	-6.68	55.54	-12.66	68.20	Average
3	7126.400	62.93	-6.68	56.26	-11.94	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6025MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

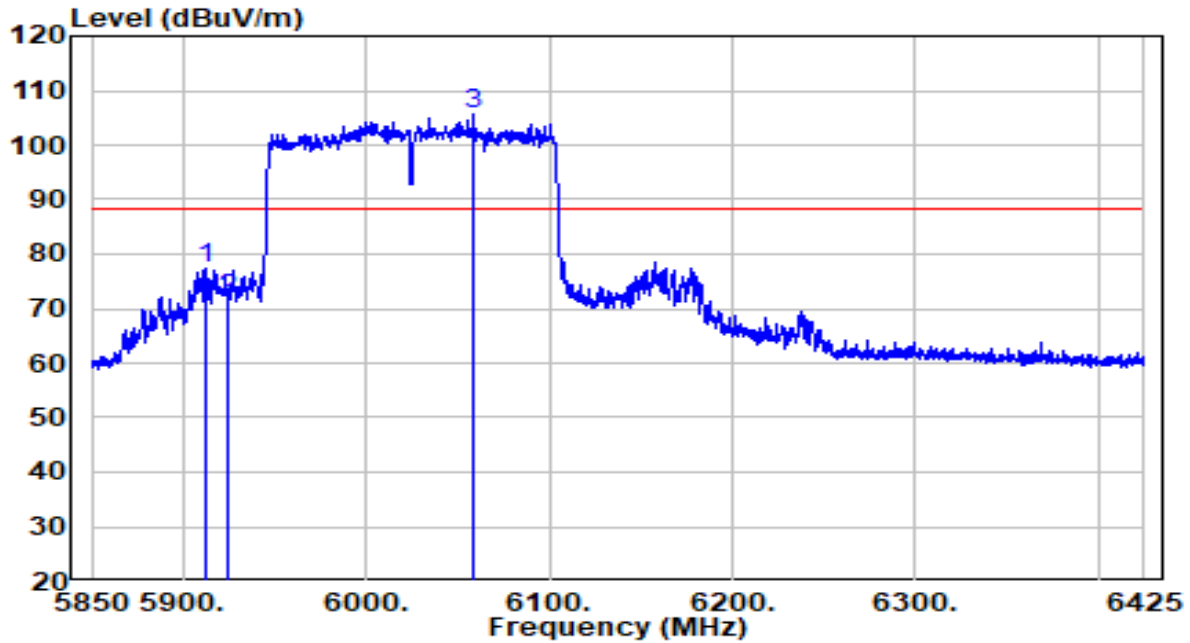


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5912.388	86.06	-8.64	77.42	-10.78	88.20	Peak
2	5925.000	80.24	-8.58	71.66	-16.54	88.20	Peak
3	* 6059.013	114.27	-8.49	105.78	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6025MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

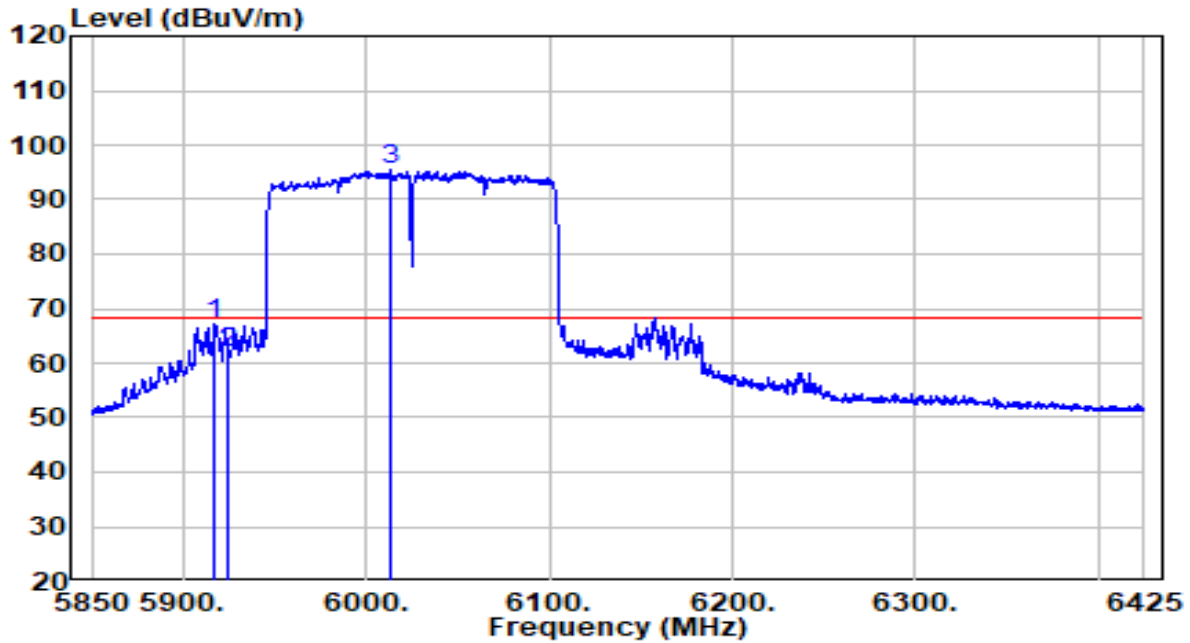


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5917.563	75.78	-8.61	67.17	-1.03	68.20	Average
2	5925.000	70.45	-8.58	61.86	-6.34	68.20	Average
3	* 6013.587	103.91	-8.61	95.30	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6025MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

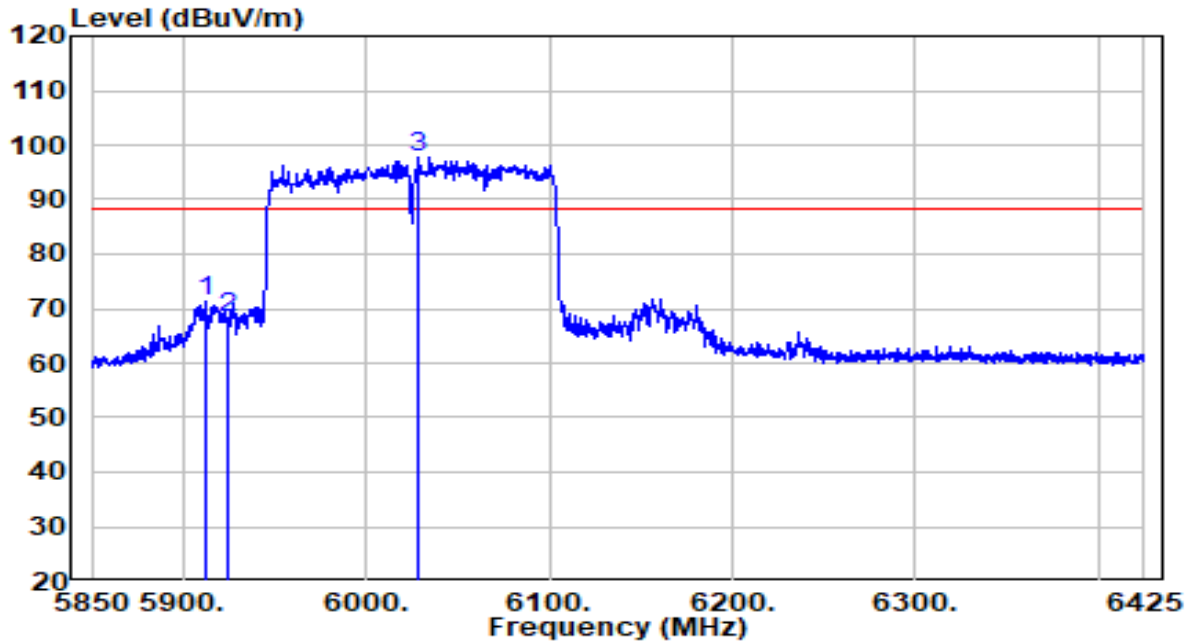


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5912.675	80.08	-8.64	71.45	-16.75	88.20	Peak
2	5925.000	77.03	-8.58	68.45	-19.75	88.20	Peak
3	* 6028.825	106.20	-8.52	97.67	N/A	N/A	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6025MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

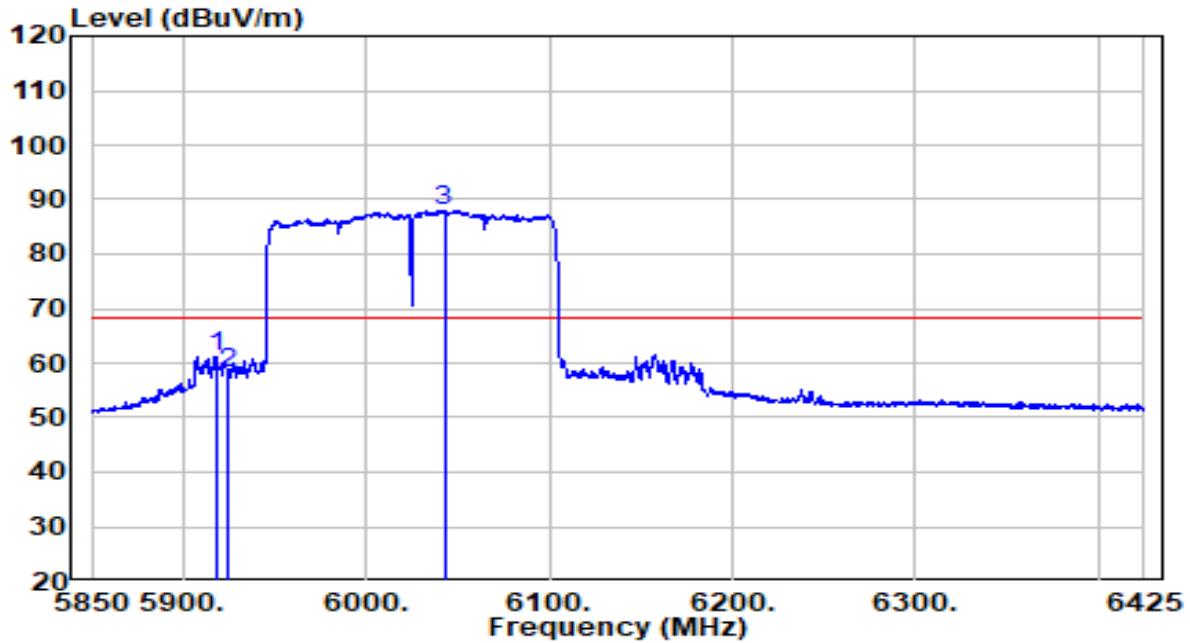


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5918.425	69.65	-8.61	61.04	-7.16	68.20	Average
2	5925.000	66.76	-8.58	58.18	-10.02	68.20	Average
3	* 6042.625	96.60	-8.51	88.08	N/A	N/A	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6985MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

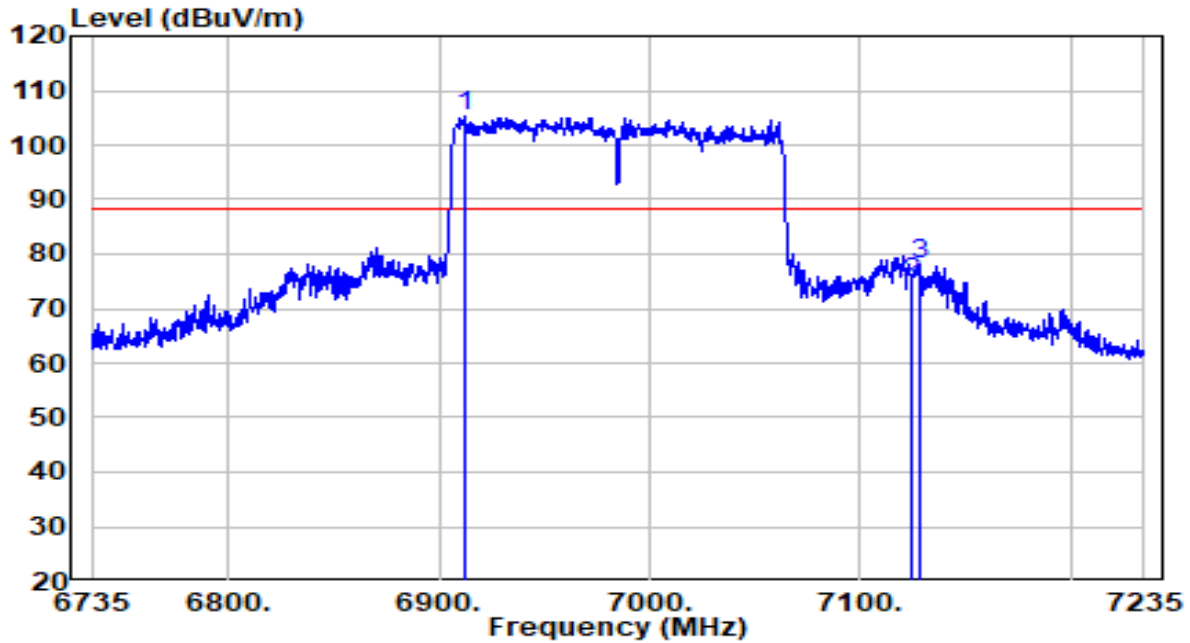


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	6912.250	112.22	-7.03	105.19	N/A	N/A	Peak
2		7125.000	81.50	-6.68	74.82	-13.38	88.20	Peak
3		7128.000	84.81	-6.66	78.14	-10.06	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).



EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Horizontal	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6985MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

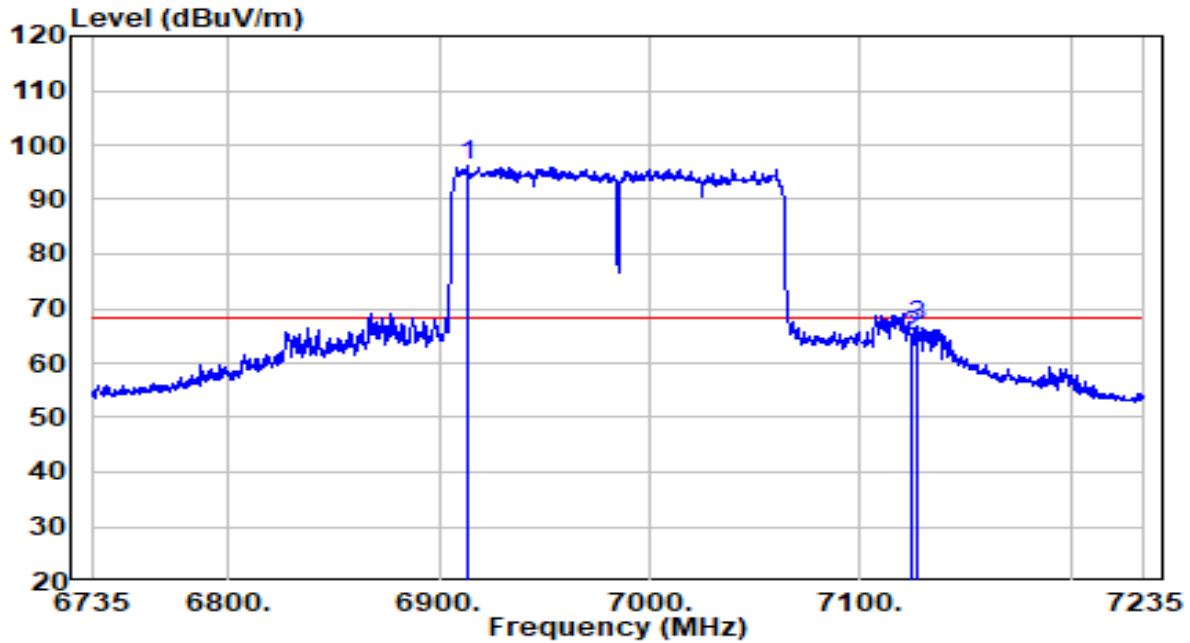


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 6913.500	103.12	-7.02	96.09	N/A	N/A	Average
2	7125.000	71.52	-6.68	64.84	-3.36	68.20	Average
3	7127.250	73.42	-6.67	66.75	-1.45	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6985MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

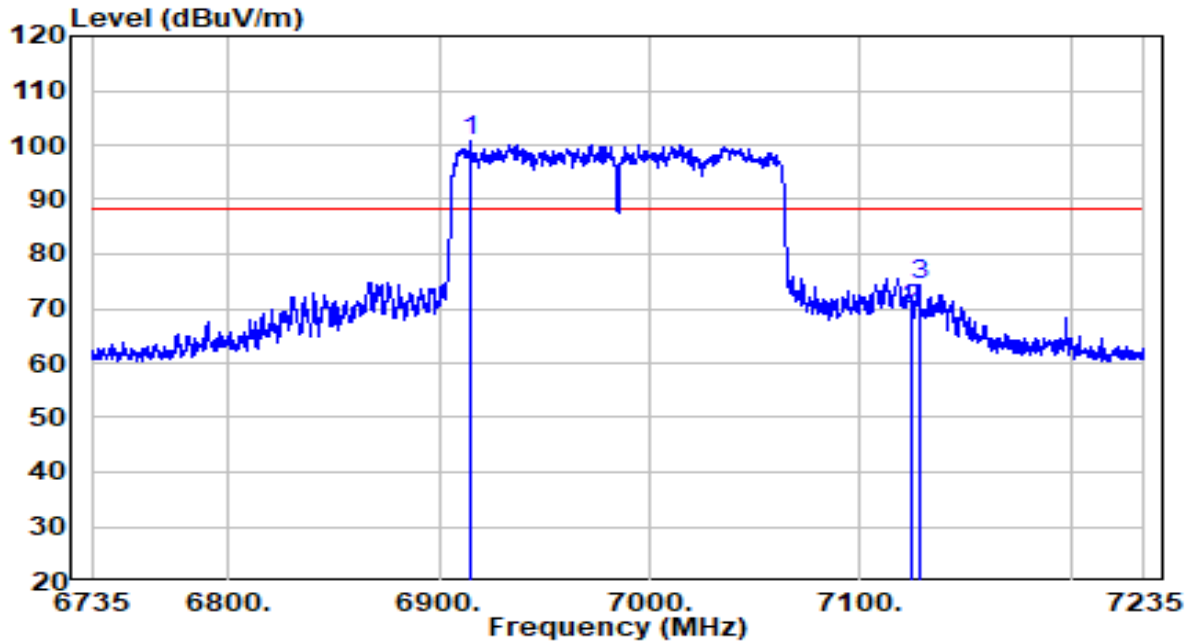


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	6914.750	107.62	-7.02	100.60	N/A	N/A	Peak
2		7125.000	76.61	-6.68	69.93	-18.27	88.20	Peak
3		7128.000	81.01	-6.66	74.34	-13.86	88.20	Peak

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-12-20
Factor	SIP-AC3_HF907_102861_1-18GHz	Temp. / Humidity	18.8°C / 41.1%
Polarity	Vertical	Site / Test Engineer	SIP-AC3/Allen Zou
Test Mode	Transmit at 6985MHz by 802.11ax-HE160	Test Voltage	120V/60Hz

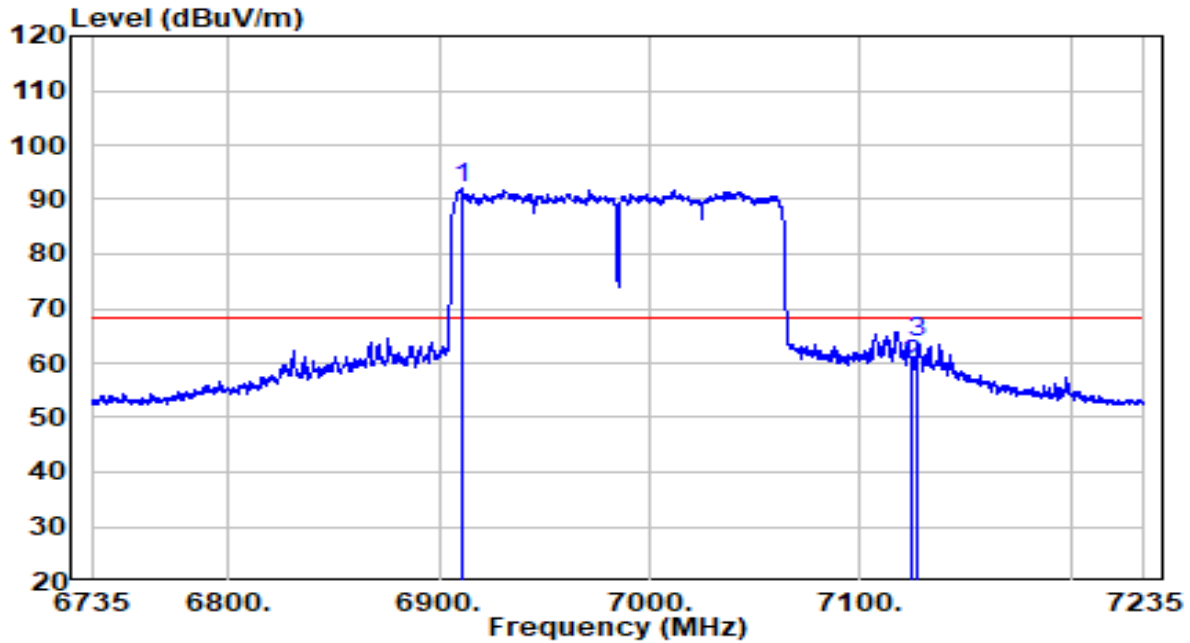


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 6911.250	98.99	-7.04	91.95	N/A	N/A	Average
2	7125.000	66.26	-6.68	59.57	-8.63	68.20	Average
3	7127.250	70.40	-6.67	63.73	-4.47	68.20	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

**A.10 AC Conducted Emissions Test Result**

EUT	ACCESS POINT	Date of Test	2022-04-15
Factor	ENV216_101684_C	Temp. / Humidity	22°C /45%
Polarity	Line1	Site / Test Engineer	SR2/Augleo Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz	Test Voltage	120V/60Hz

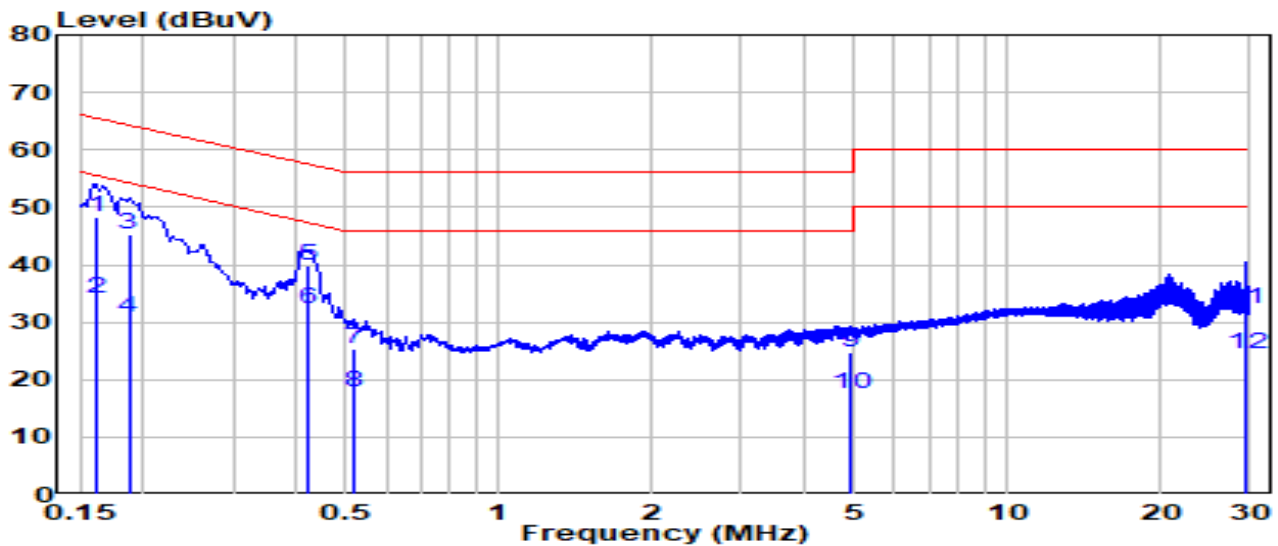


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Remark (QP/PK/AV)
1	0.162	38.60	9.72	48.32	-17.04	65.36	QP
2	0.162	24.30	9.72	34.02	-21.34	55.36	Average
3	0.187	35.60	9.72	45.32	-18.85	64.17	QP
4	0.187	21.20	9.72	30.92	-23.25	54.17	Average
5	0.421	30.00	9.72	39.72	-17.71	57.43	QP
6	* 0.421	22.70	9.72	32.42	-15.01	47.43	Average
7	0.520	15.70	9.72	25.42	-30.58	56.00	QP
8	0.520	8.10	9.72	17.82	-28.18	46.00	Average
9	4.900	14.90	9.88	24.78	-31.22	56.00	QP
10	4.900	7.70	9.88	17.58	-28.42	46.00	Average
11	29.380	21.80	10.49	32.29	-27.71	60.00	QP
12	29.380	13.90	10.49	24.39	-25.61	50.00	Average

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement(dBμV) = Reading(dBμV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2022-04-15
Factor	ENV216_101684_C	Temp. / Humidity	22°C /45%
Polarity	Neutral	Site / Test Engineer	SR2 / Augleo Wang
Test Mode	Transmit by 802.11ax-HE20 at Channel 5955MHz	Test Voltage	120V/60Hz

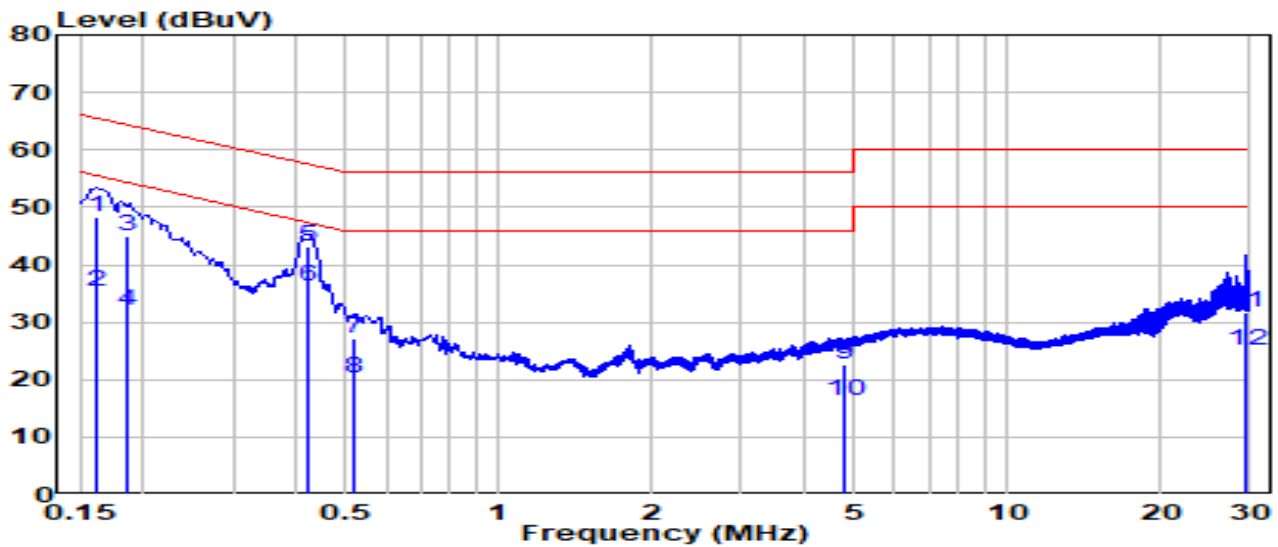

No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Remark (QP/PK/AV)
1	0.162	38.60	9.71	48.31	-17.05	65.36	QP
2	0.162	25.50	9.71	35.21	-20.15	55.36	Average
3	0.186	35.30	9.71	45.01	-19.20	64.21	QP
4	0.186	22.40	9.71	32.11	-22.10	54.21	Average
5	0.420	33.50	9.71	43.21	-14.24	57.45	QP
6	* 0.420	26.40	9.71	36.11	-11.34	47.45	Average
7	0.520	17.60	9.71	27.31	-28.69	56.00	QP
8	0.520	10.40	9.71	20.11	-25.89	46.00	Average
9	4.751	12.80	9.82	22.62	-33.38	56.00	QP
10	4.751	6.60	9.82	16.42	-29.58	46.00	Average
11	29.310	21.10	10.53	31.63	-28.37	60.00	QP
12	29.310	14.40	10.53	24.93	-25.07	50.00	Average

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBμV) = Reading(dBμV) + C.F (Correction Factor).

## **Appendix B - Test Setup Photograph**

Refer to "AP-615\_Test setup photo" file.

## Appendix C - EUT Photograph

Refer to "AP-615\_EUT photo" file.

————— The End —————