



802.11ax-HE20 Power Spectral Density – Ant 1 / Ant 0 + 1


Channel 100 (5500MHz)

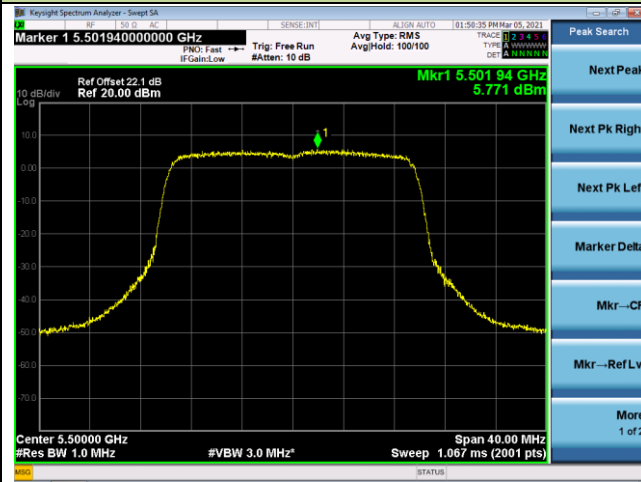


Channel 116 (5580MHz)

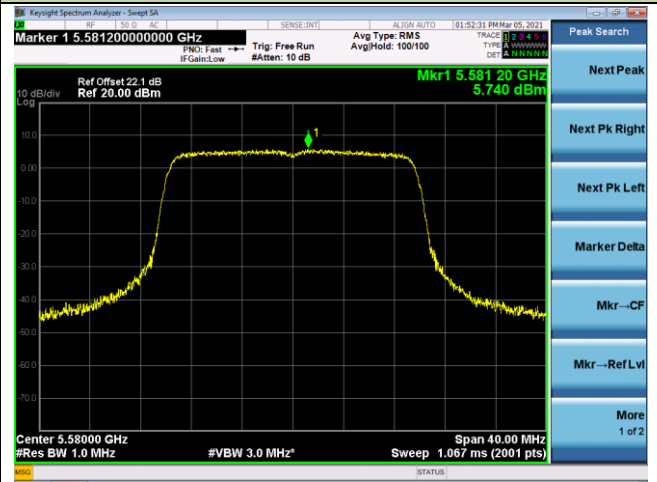


Channel 140 (5700MHz)

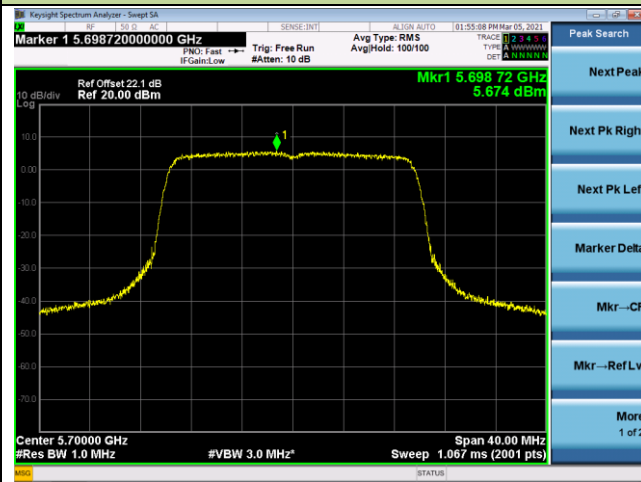


Channel 144 (5720MHz)

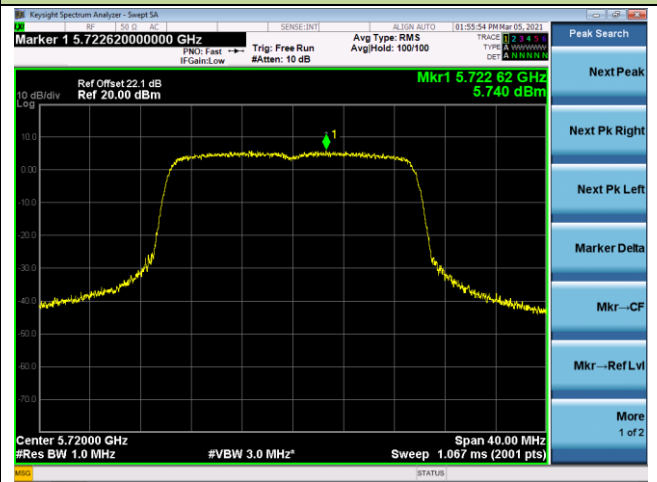

Channel 149 (5745MHz)

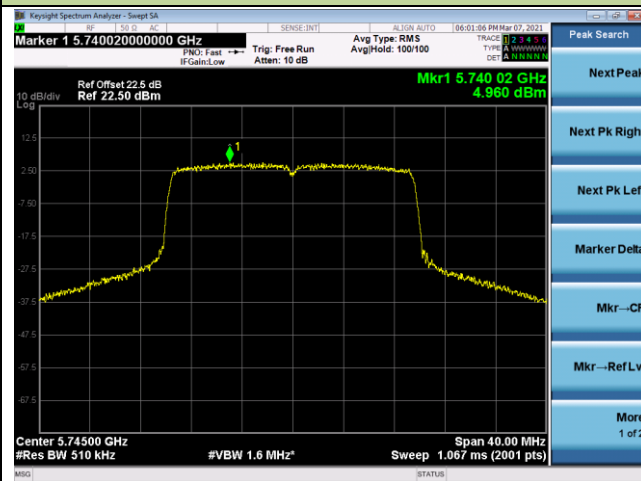


Channel 157 (5785MHz)

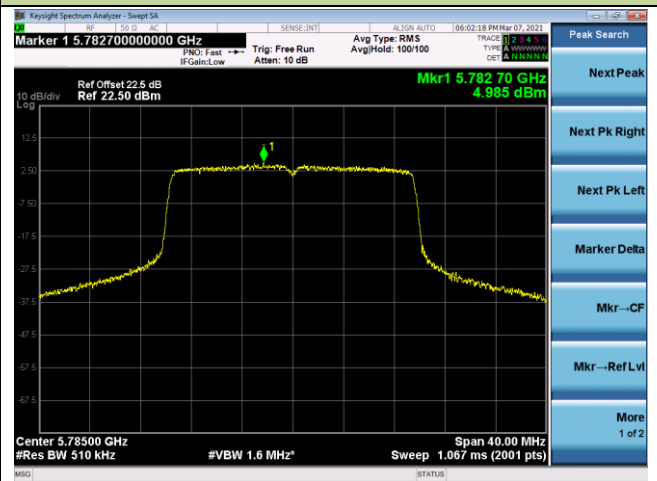


802.11ax-HE20 Power Spectral Density – Ant 1 / Ant 0 + 1

Channel 165 (5825MHz)

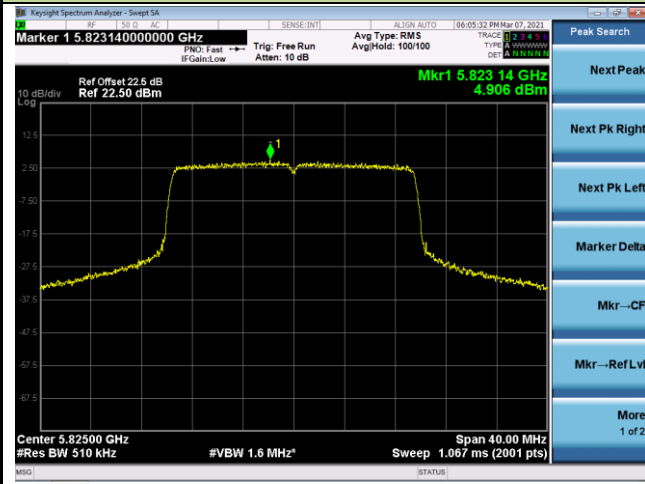


802.11ax-HE40 Power Spectral Density – Ant 1 / Ant 0 + 1


Channel 38 (5190MHz)

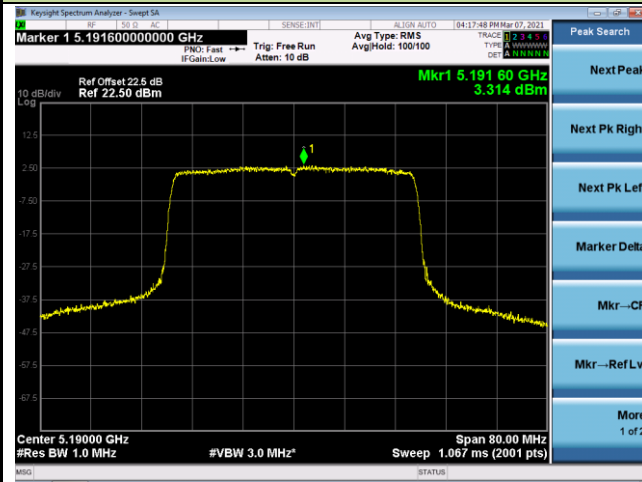


Channel 46 (5230MHz)

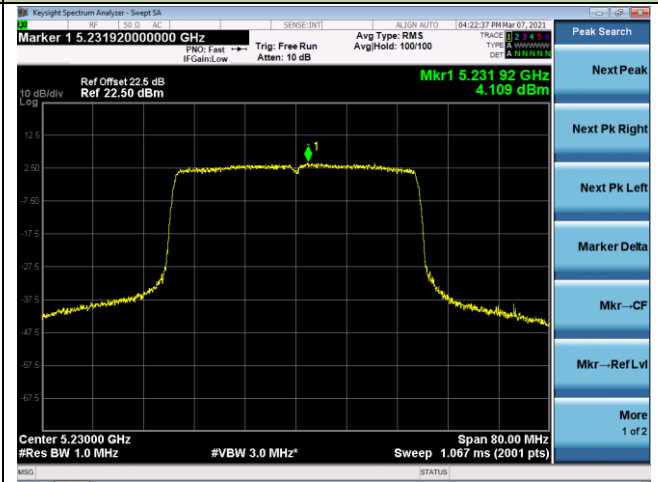


Channel 54 (5270MHz)

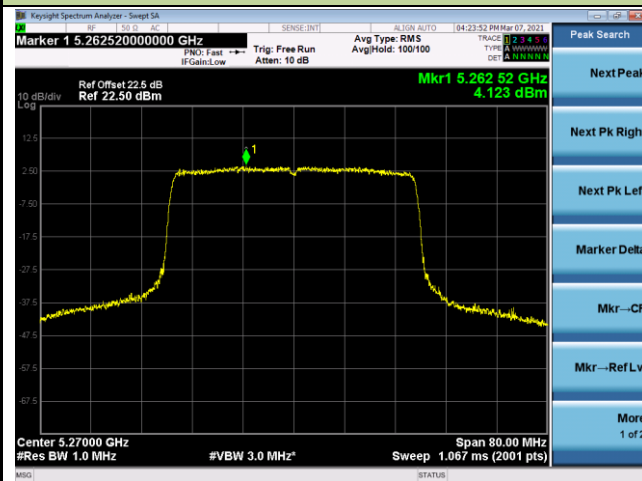


Channel 62 (5310MHz)

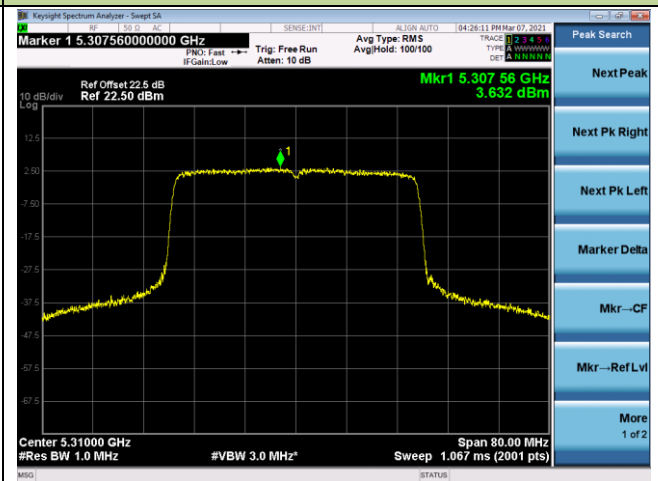

Channel 102 (5510MHz)

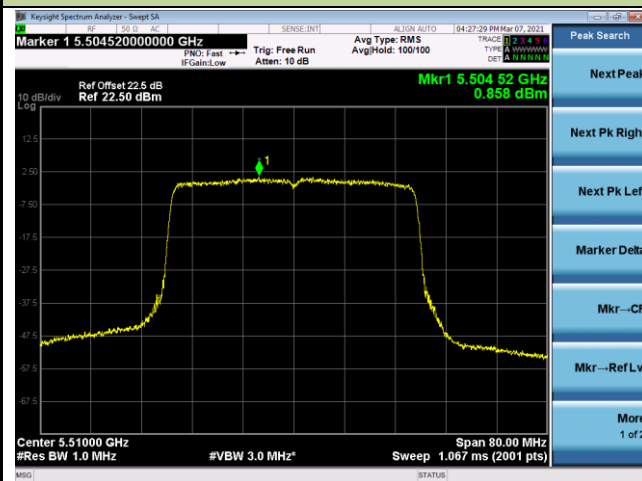


Channel 110 (5550MHz)

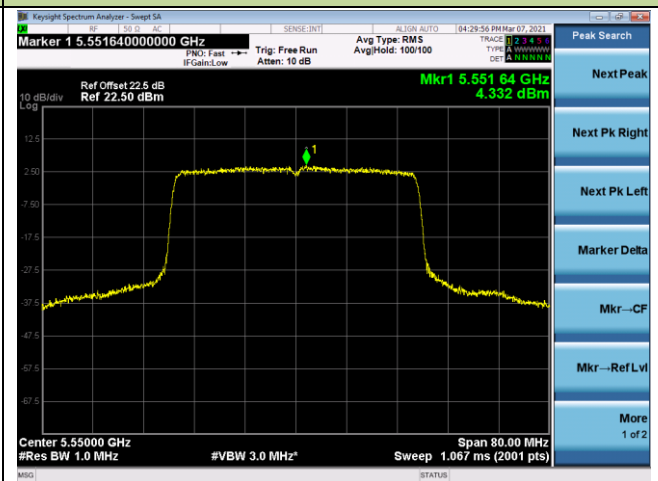


802.11ax-HE40 Power Spectral Density – Ant 1 / Ant 0 + 1


Channel 134 (5670MHz)

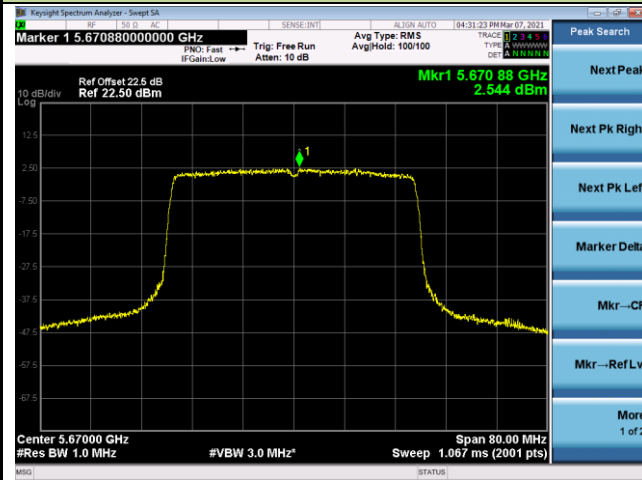


Channel 142 (5710MHz)

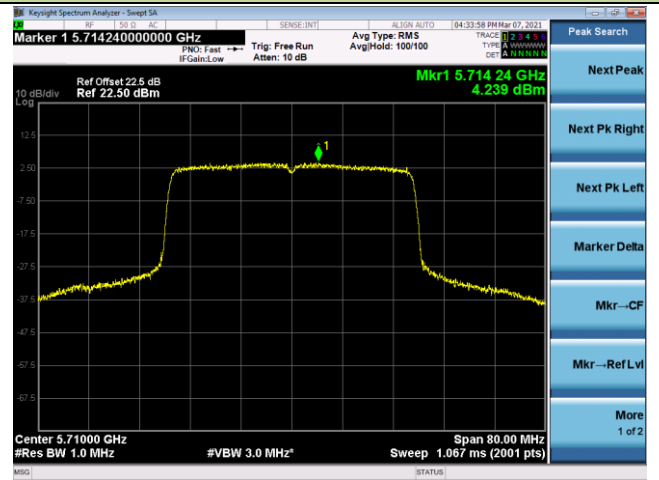

Channel 151 (5755MHz)

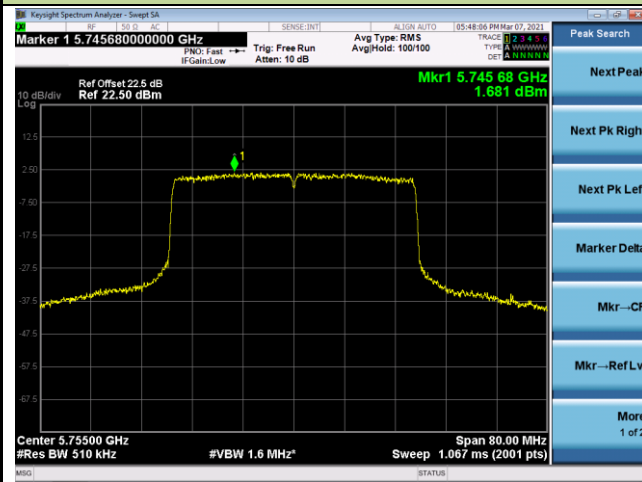


Channel 159 (5795MHz)

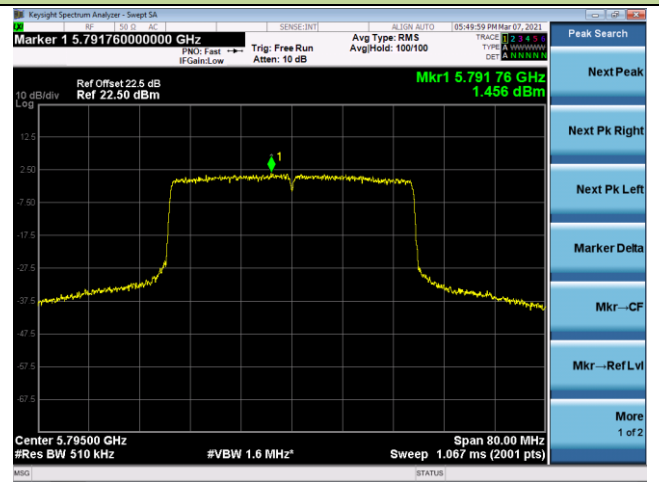


802.11ax-HE80 Power Spectral Density – Ant 1 / Ant 0 + 1


Channel 42 (5210MHz)

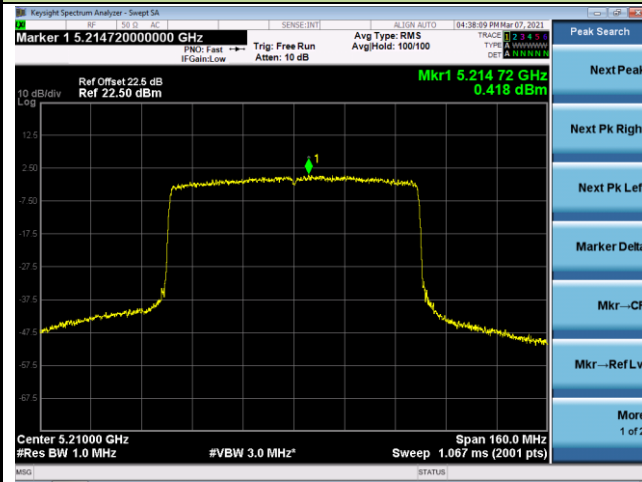


Channel 58 (5290MHz)

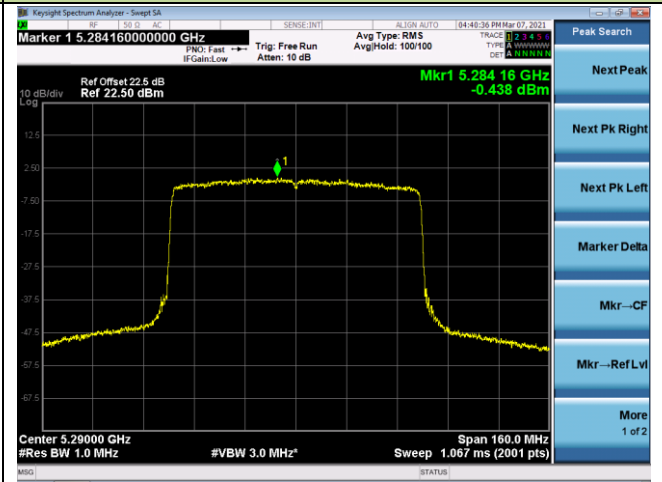


Channel 106 (5530MHz)

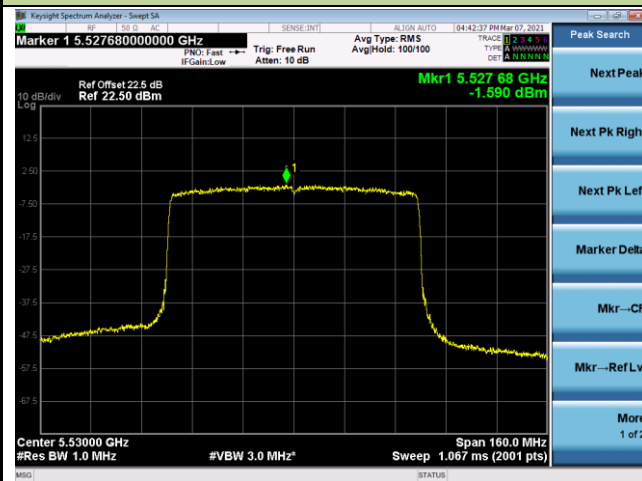


Channel 122 (5610MHz)

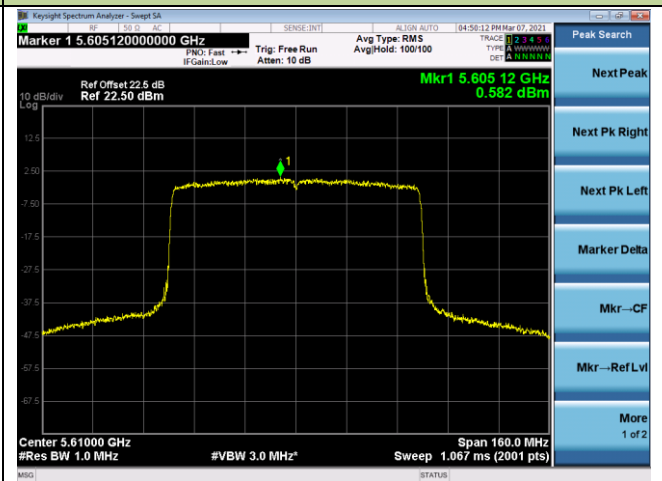

Channel 138 (5690MHz)

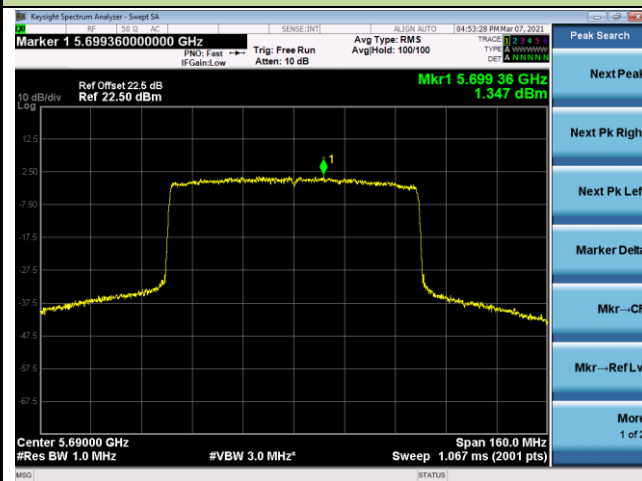

Channel 155 (5775MHz)

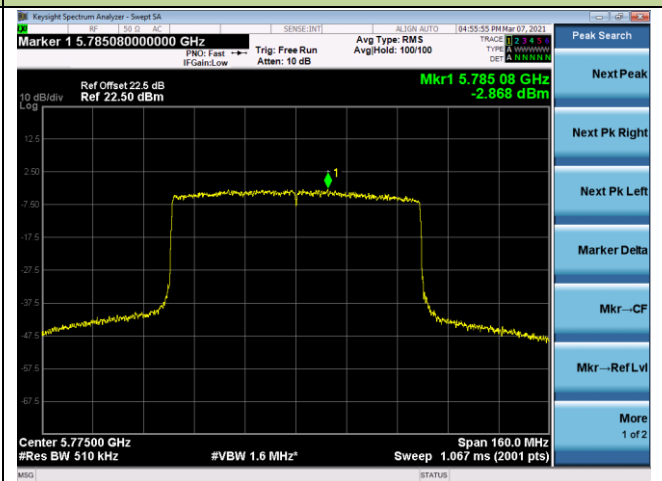

7.6. Frequency Stability Measurement

7.6.1. Test Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5GHz band (IEEE 802.11 specification).

7.6.2. Test Procedure Used

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.6.3. Test Setup

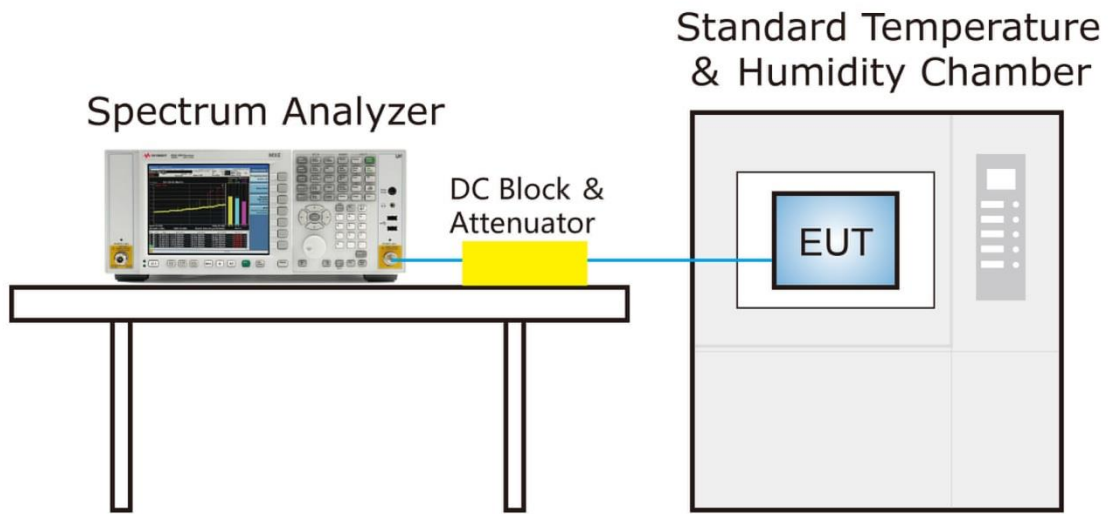

7.6.4. Test Result

Product	ACCESS POINT	Temperature	24°C
Test Engineer	Eric Lin	Relative Humidity	45%RH
Test Site	SR2	Test Date	2021/04/20
Test Mode	5180MHz (Carrier Mode)		

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100%	120	0	-5.21	-5.72	-6.10	-6.70
		+ 10	-5.41	-5.58	-6.26	-6.73
		+ 20	-5.85	-5.63	-6.34	-6.71
		+ 30	-5.67	-6.05	-6.31	-6.75
		+ 40	-5.89	-6.18	-6.37	-6.77
		+ 50	-5.97	-6.14	-6.40	-5.93
115%	138	+ 20	-5.79	-6.41	-6.43	-6.78
85%	102	+ 20	-6.00	-5.46	-6.46	-5.52

Note: Frequency Tolerance (ppm) = $\frac{\{[\text{Measured Frequency (Hz)} - \text{Declared Frequency (Hz)}]\}}{\text{Declared Frequency (Hz)}} * 10^6$.

7.7. Radiated Spurious Emission Measurement

7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

KDB 789033 D02v02r01 – Section G

7.7.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.

802.11a	VBW = 750Hz	802.11ax-HE20	VBW = 200Hz
802.11ac-VHT20	VBW = 100Hz	802.11ax-HE40	VBW = 200Hz
802.11ac-VHT40	VBW = 200Hz	802.11ax-HE80	VBW = 200Hz
802.11ac-VHT80	VBW = 200Hz	N/A	N/A


4. Detector = Peak
5. Sweep time = auto

6. Trace mode = max hold


7. Trace was allowed to stabilize

7.7.4. Test Setup

Below 1GHz Test Setup:

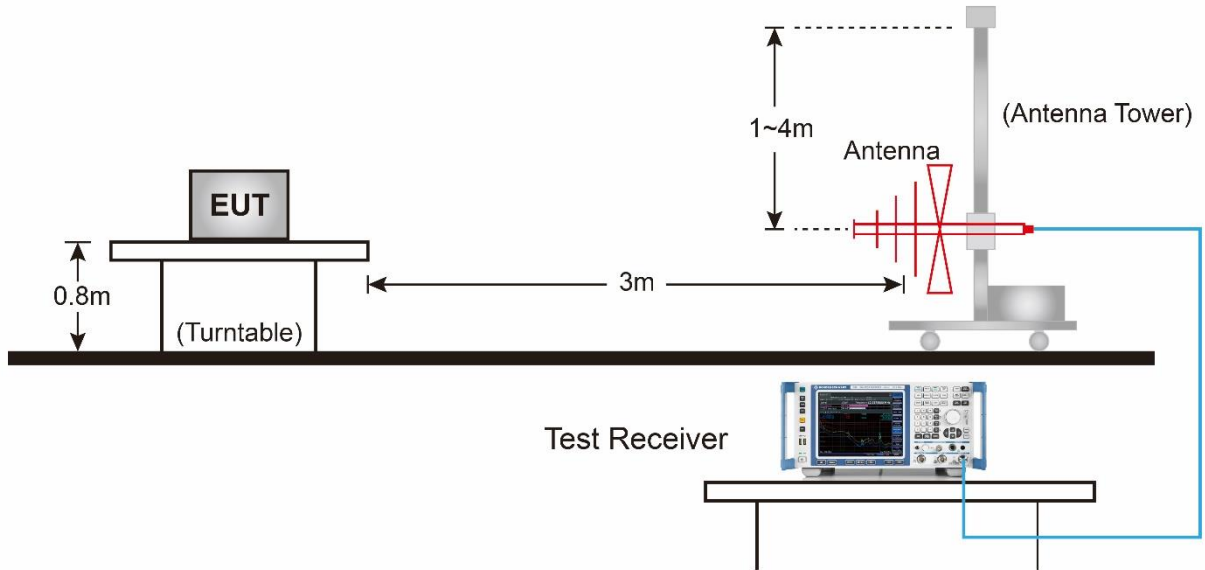


Above 1GHz Test Setup:

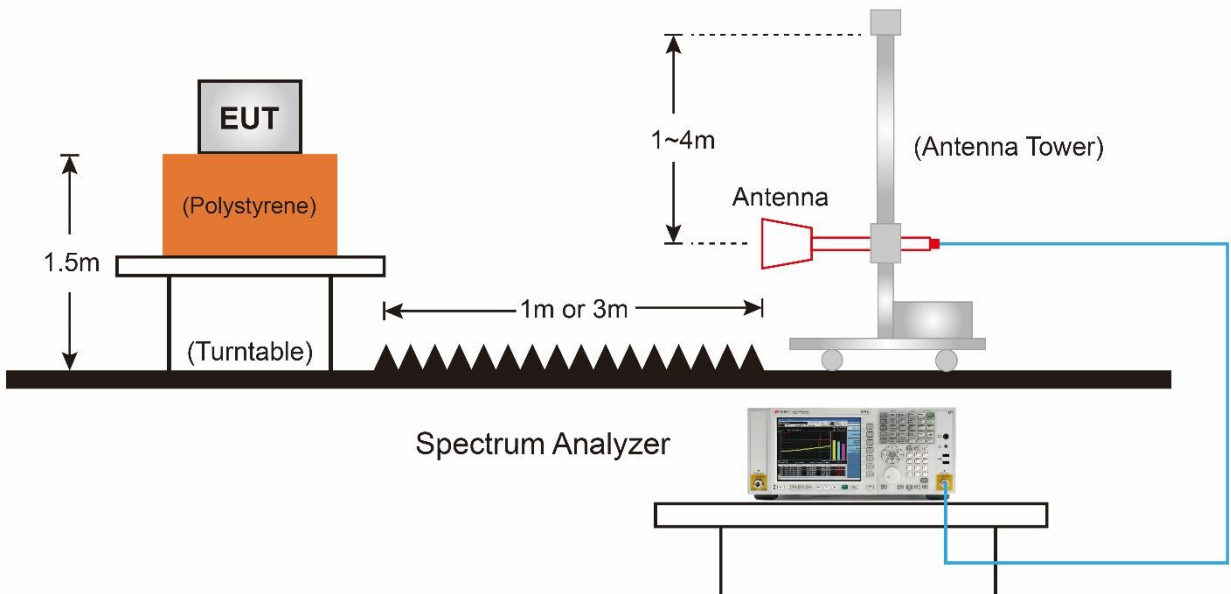

7.7.5.Test Result

Type A Filter Configuration

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5180MHz	Test Voltage	120V/60Hz

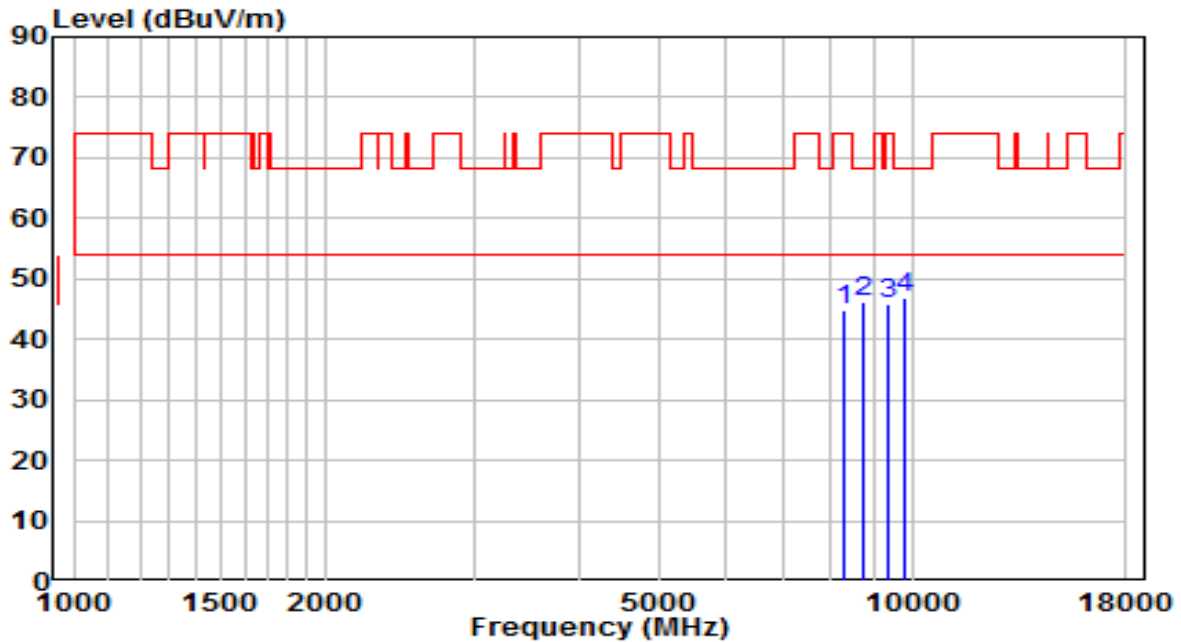


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8293.000	32.30	12.49	44.79	-29.21	74.00	Peak
2	8769.000	33.02	13.11	46.14	-22.06	68.20	Peak
3	9364.000	31.52	14.22	45.74	-28.26	74.00	Peak
4	* 9814.500	31.99	15.01	47.00	-21.20	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5180MHz	Test Voltage	120V/60Hz

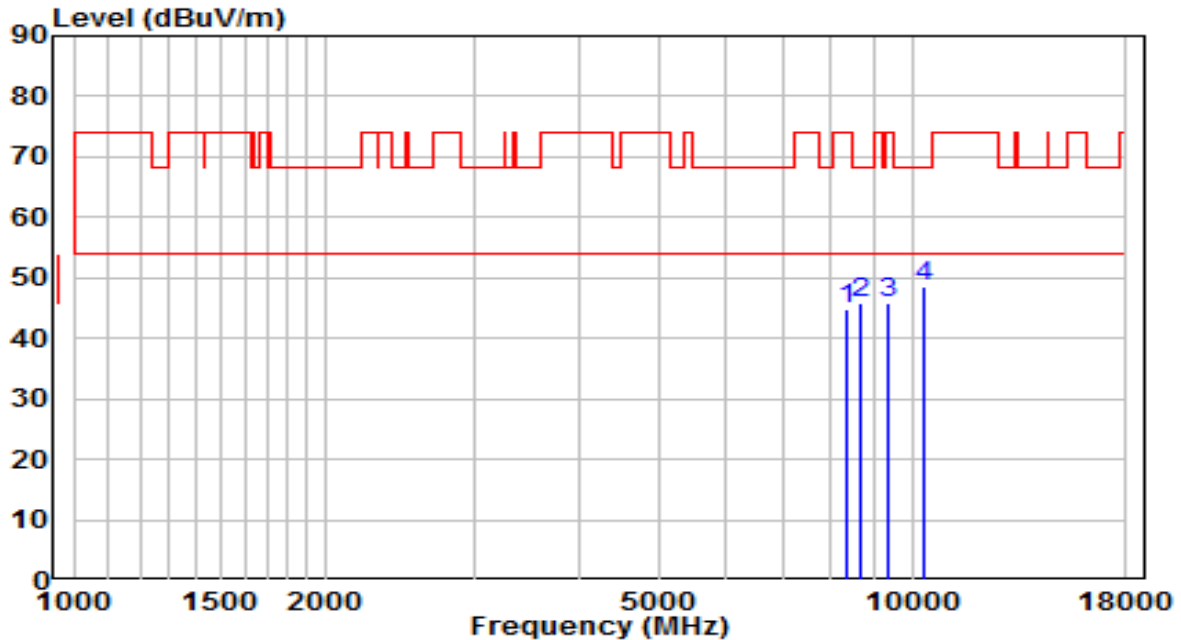


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8352.500	32.49	12.48	44.97	-29.03	74.00	Peak
2	8701.000	32.76	12.95	45.71	-22.49	68.20	Peak
3	9372.500	31.69	14.23	45.93	-28.07	74.00	Peak
4	* 10299.000	32.04	16.38	48.43	-19.77	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5220MHz	Test Voltage	120V/60Hz

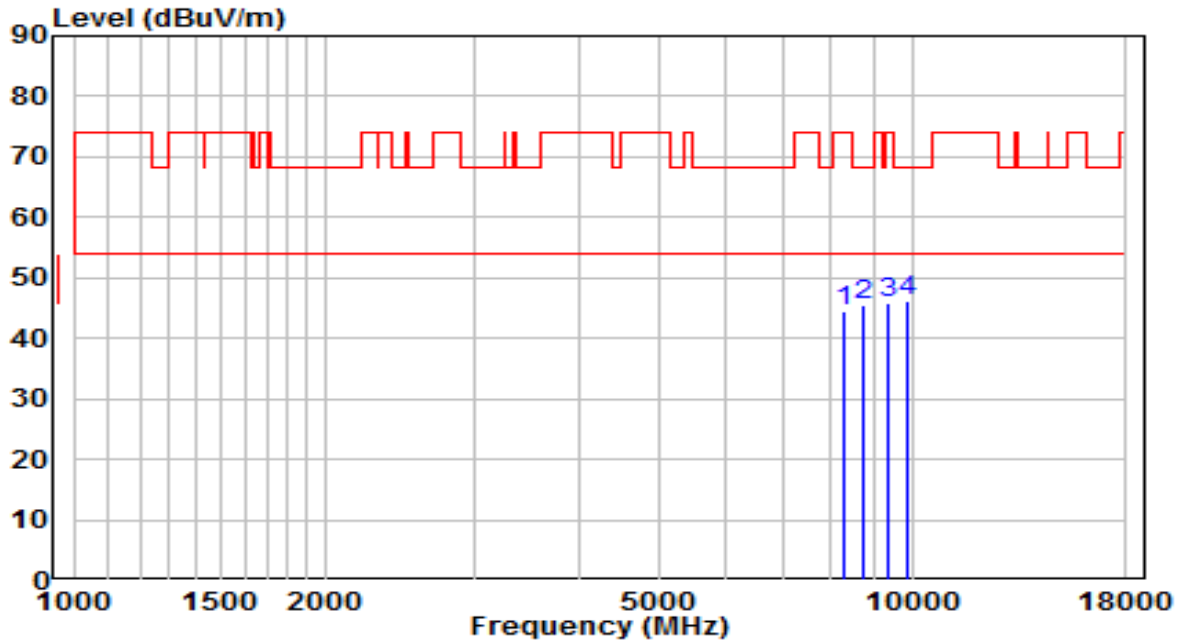


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8276.000	32.05	12.49	44.54	-29.46	74.00	Peak
2	8752.000	32.37	13.07	45.44	-22.76	68.20	Peak
3	9347.000	31.62	14.19	45.82	-28.18	74.00	Peak
4	* 9874.000	31.21	15.12	46.33	-21.87	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5220MHz	Test Voltage	120V/60Hz

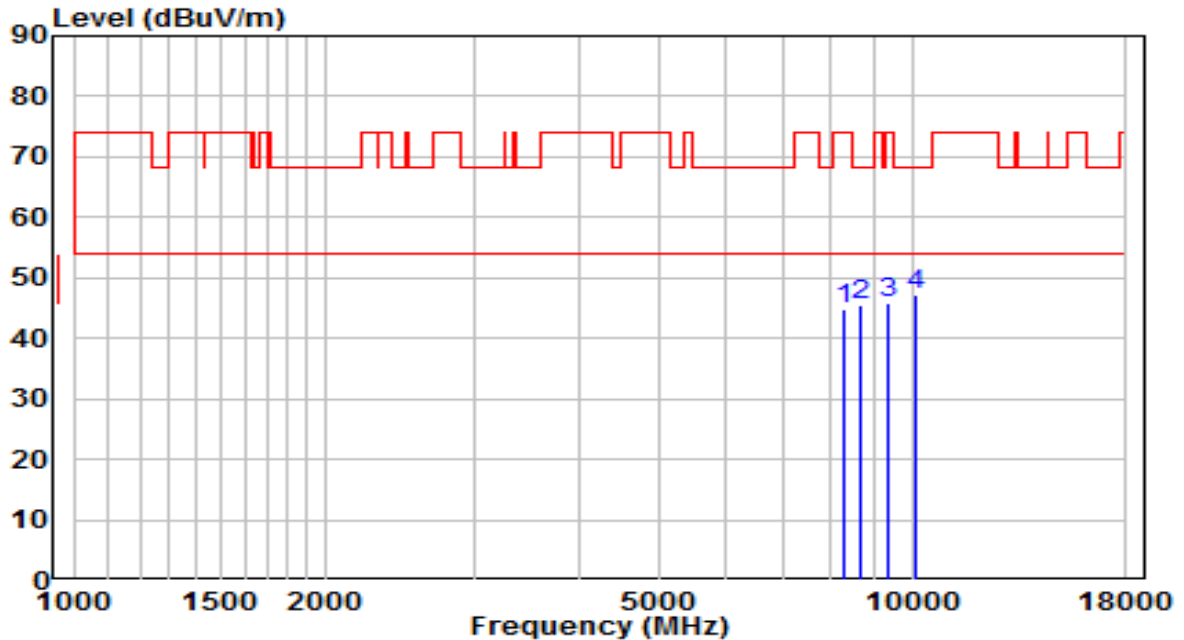


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8284.500	32.41	12.49	44.89	-29.11	74.00	Peak
2	8650.000	32.72	12.82	45.55	-22.65	68.20	Peak
3	9381.000	31.70	14.24	45.94	-28.06	74.00	Peak
4	* 10129.000	31.47	15.80	47.27	-20.93	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5240MHz	Test Voltage	120V/60Hz

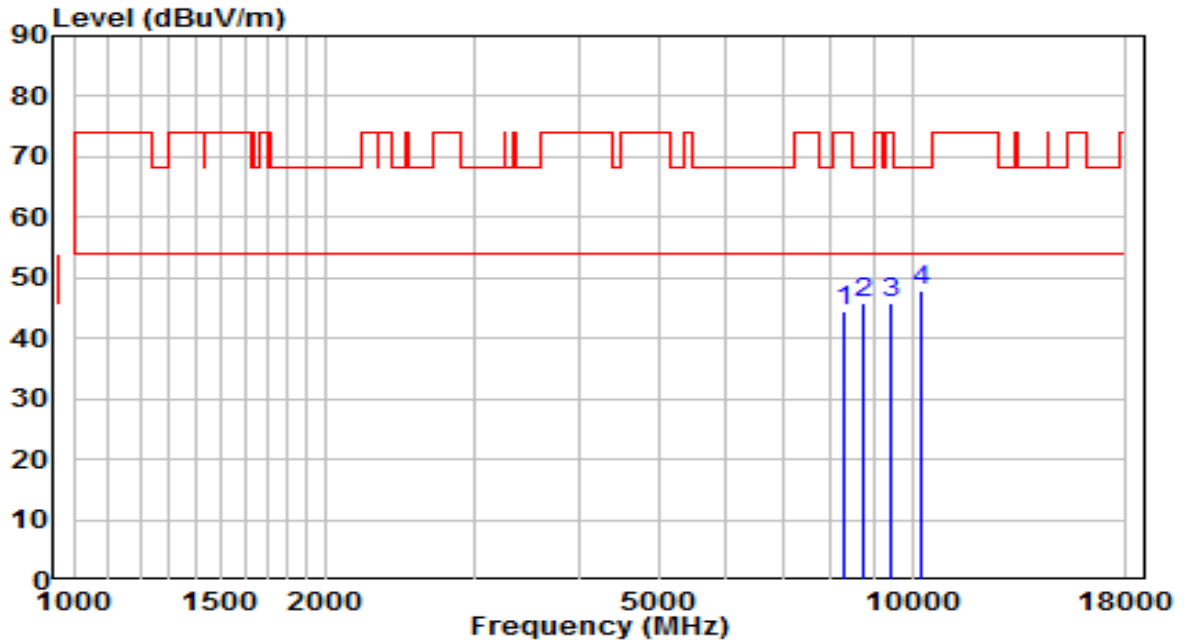


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8293.000	32.11	12.49	44.59	-29.41	74.00	Peak
2	8760.500	32.76	13.09	45.86	-22.34	68.20	Peak
3	9457.500	31.59	14.36	45.95	-28.05	74.00	Peak
4	* 10222.500	31.87	16.12	47.99	-20.21	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5240MHz	Test Voltage	120V/60Hz

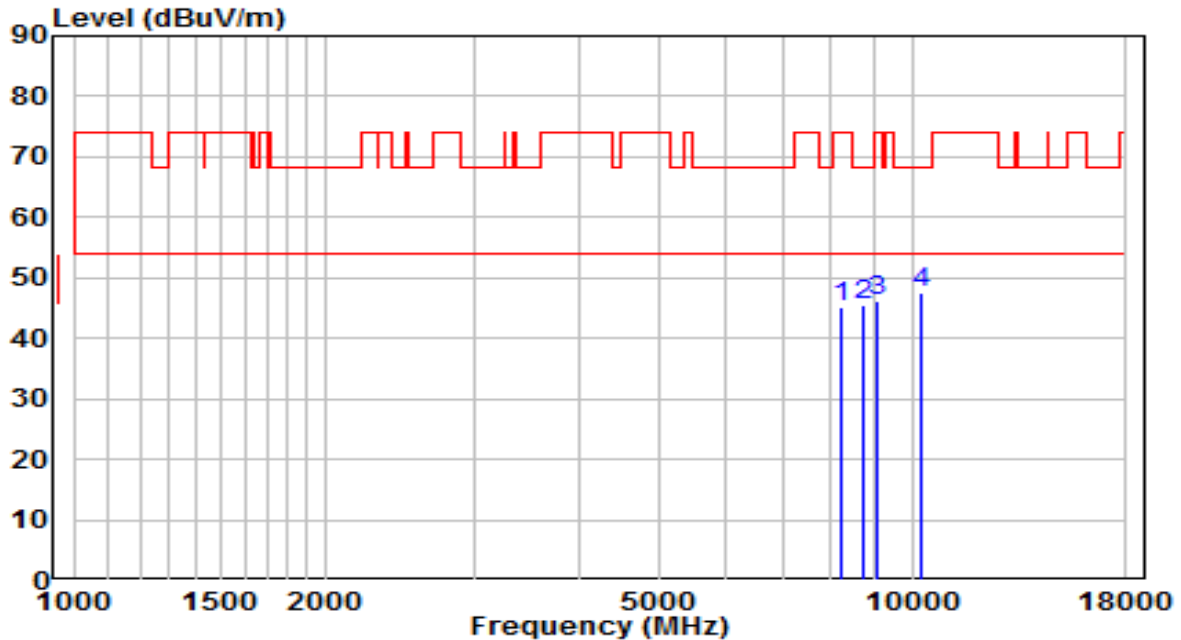


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8259.000	32.72	12.49	45.21	-28.79	74.00	Peak
2	8752.000	32.44	13.07	45.52	-22.68	68.20	Peak
3	9058.000	32.38	13.77	46.14	-27.86	74.00	Peak
4	* 10265.000	31.45	16.27	47.72	-20.48	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5260MHz	Test Voltage	120V/50Hz

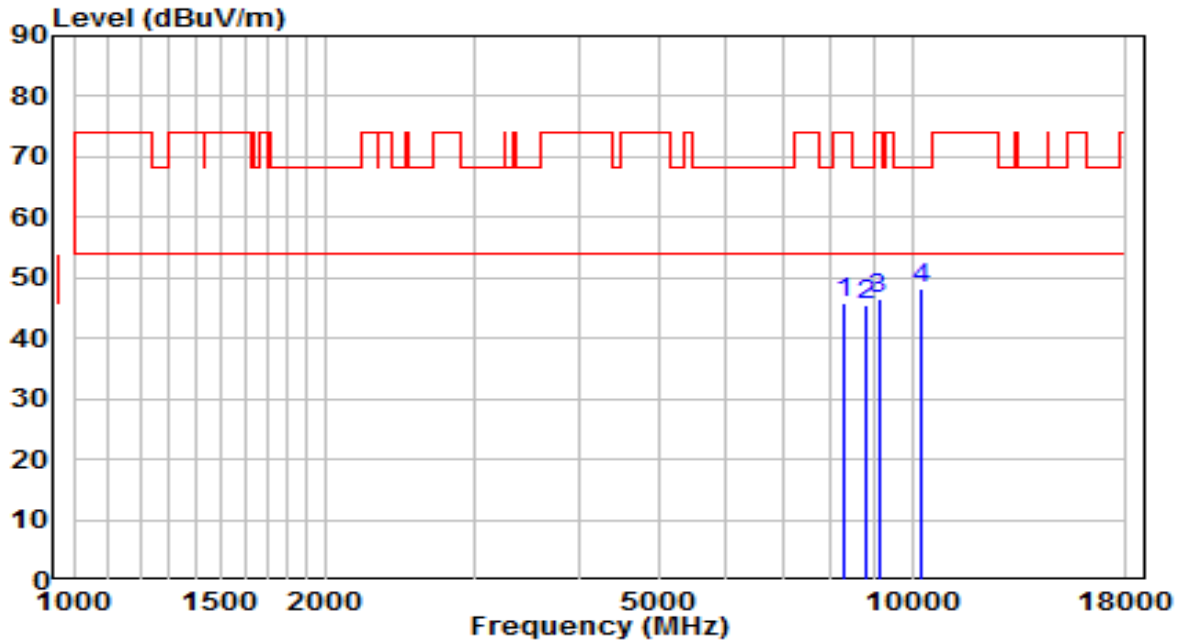


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8293.000	33.30	12.49	45.78	-28.22	74.00	Peak
2	8828.500	32.25	13.26	45.51	-22.69	68.20	Peak
3	9117.500	32.81	13.85	46.67	-27.33	74.00	Peak
4	* 10248.000	32.17	16.21	48.37	-19.83	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5260MHz	Test Voltage	120V/50Hz

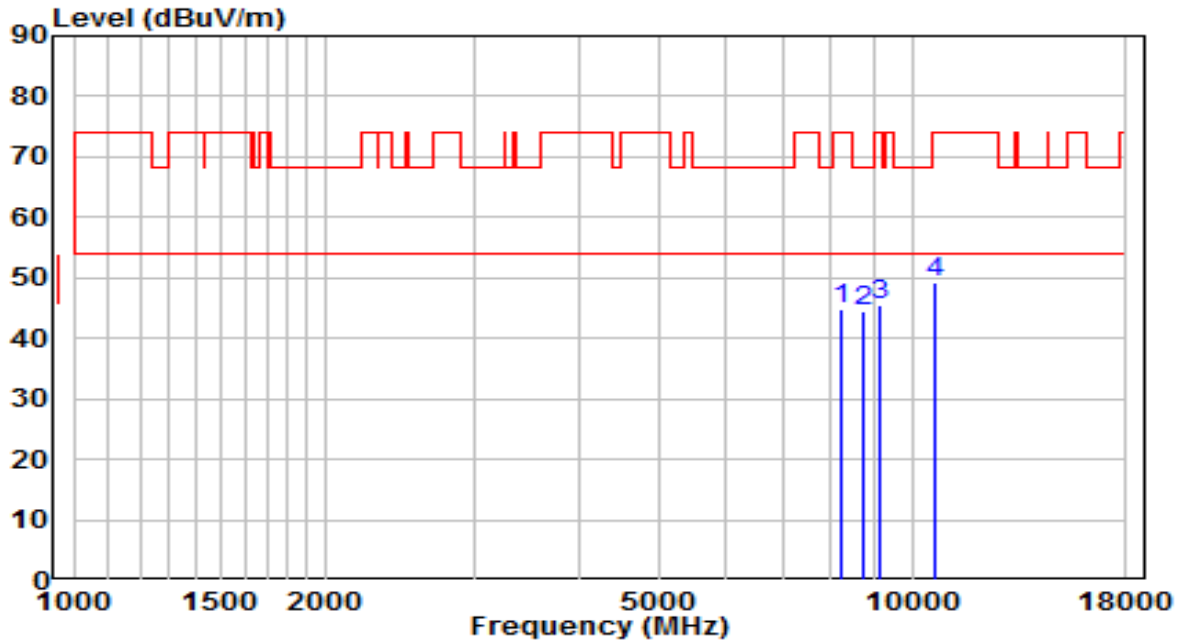


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8242.000	32.48	12.49	44.97	-29.03	74.00	Peak
2	* 8760.500	31.53	13.09	44.62	-23.58	68.20	Peak
3	9126.000	31.72	13.87	45.59	-28.41	74.00	Peak
4	10656.000	32.05	17.29	49.34	-24.66	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5300MHz	Test Voltage	120V/50Hz

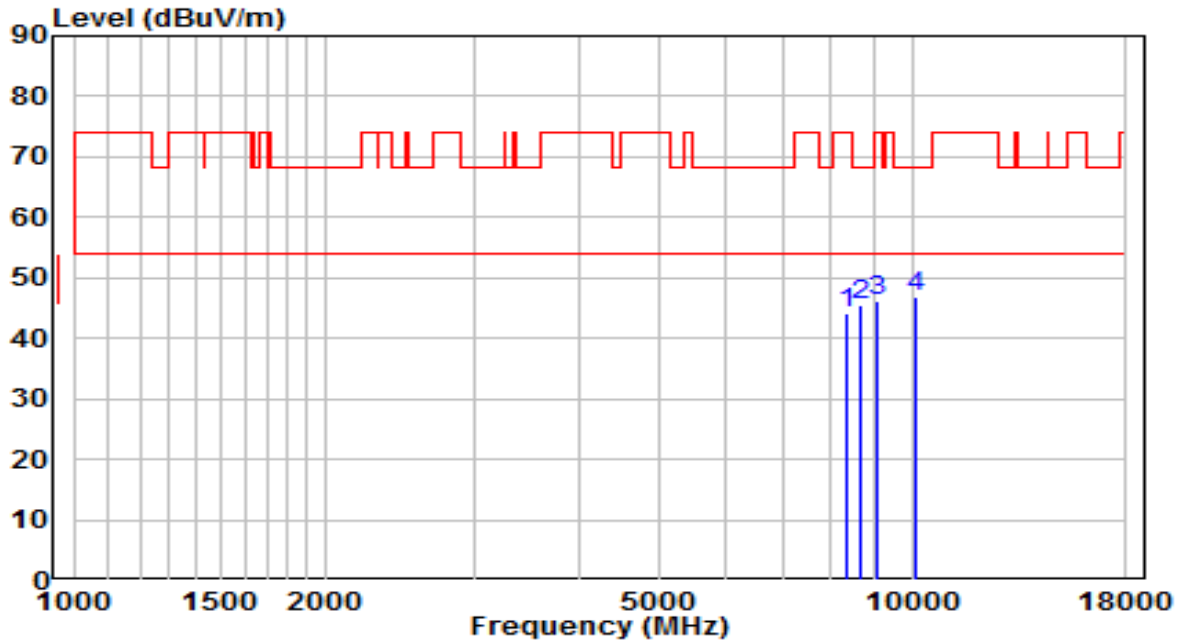


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8335.500	31.83	12.48	44.31	-29.69	74.00	Peak
2	8675.500	32.68	12.88	45.57	-22.63	68.20	Peak
3	9092.000	32.41	13.82	46.23	-27.77	74.00	Peak
4	* 10069.500	31.18	15.60	46.78	-21.42	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5300MHz	Test Voltage	120V/50Hz

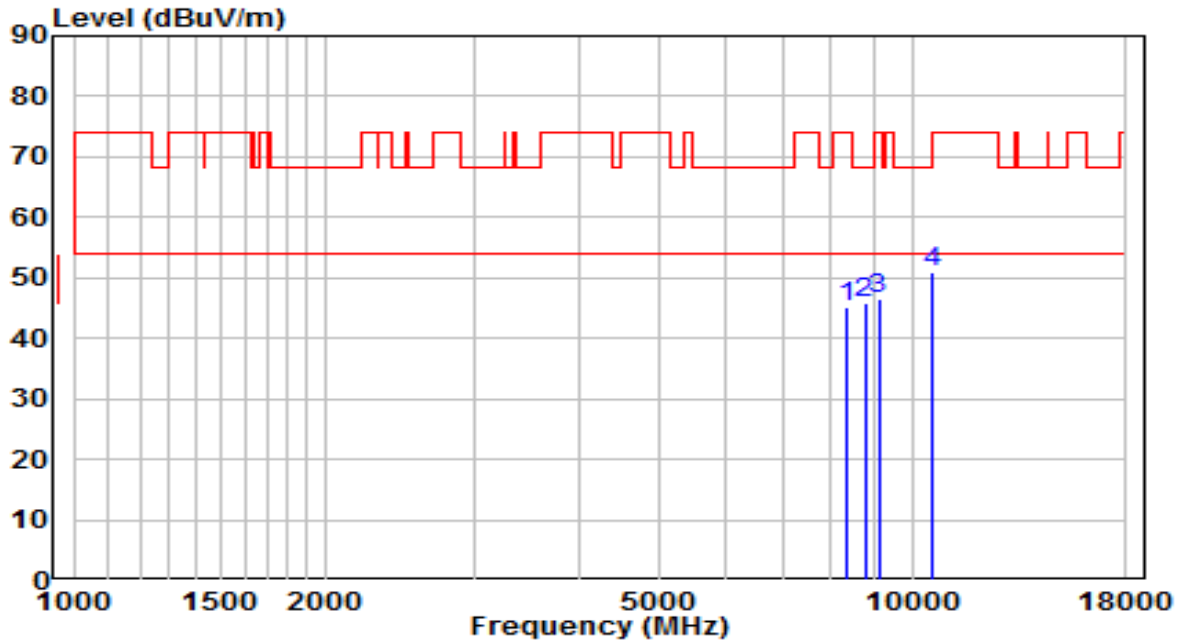


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8327.000	32.75	12.48	45.23	-28.77	74.00	Peak
2	8777.500	32.74	13.13	45.87	-22.33	68.20	Peak
3	9117.500	32.52	13.85	46.37	-27.63	74.00	Peak
4	* 10596.500	33.75	17.21	50.95	-17.25	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5320MHz	Test Voltage	120V/50Hz

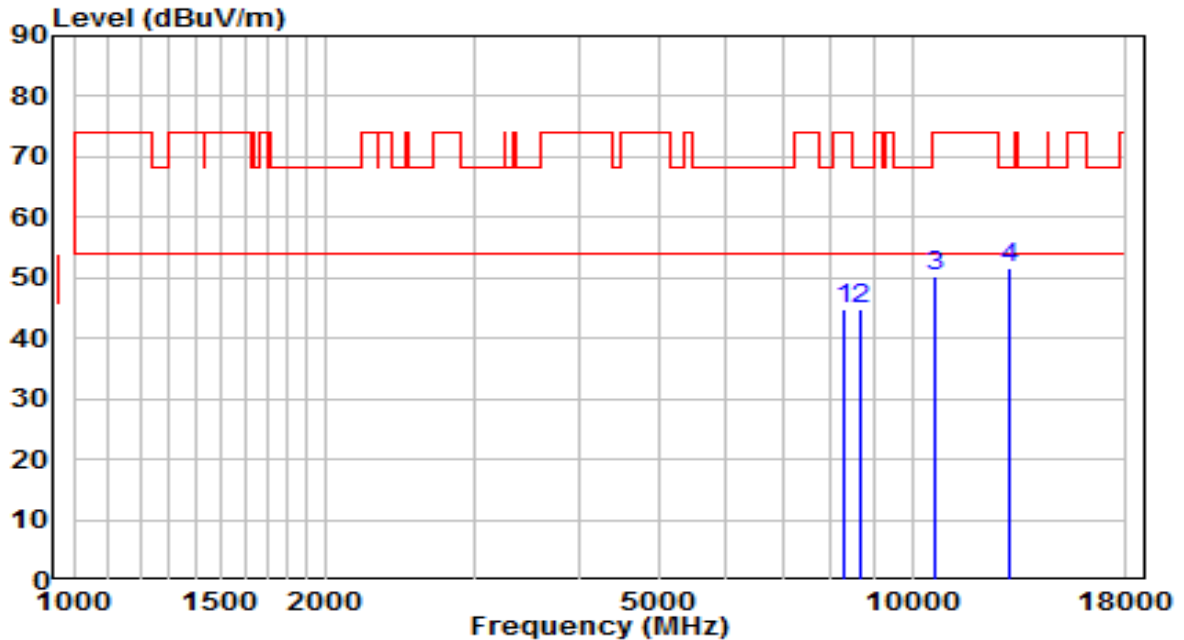


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8318.500	32.48	12.48	44.96	-29.04	74.00	Peak
2	8650.000	32.04	12.82	44.86	-23.34	68.20	Peak
3	10639.000	32.84	17.27	50.11	-23.89	74.00	Peak
4	* 13019.000	32.36	19.34	51.70	-16.50	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5320MHz	Test Voltage	120V/50Hz

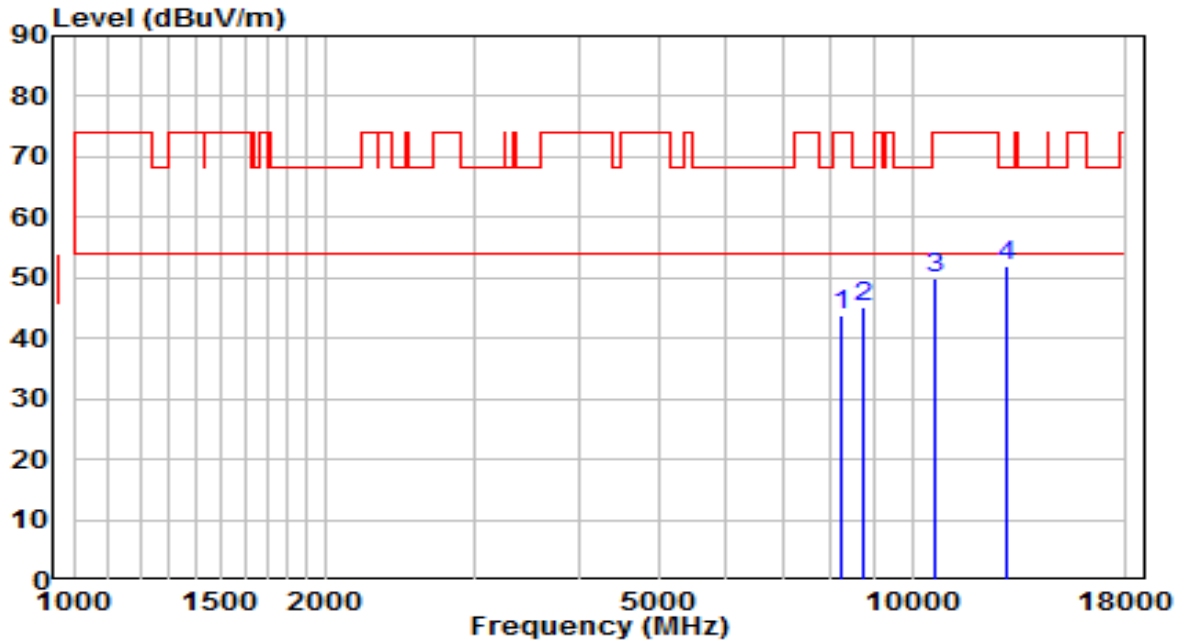


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8242.000	31.35	12.49	43.84	-30.16	74.00	Peak
2	8726.500	32.03	13.01	45.04	-23.16	68.20	Peak
3	10639.000	32.50	17.27	49.77	-24.23	74.00	Peak
4	* 12968.000	32.85	19.20	52.05	-16.15	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5500MHz	Test Voltage	120V/50Hz

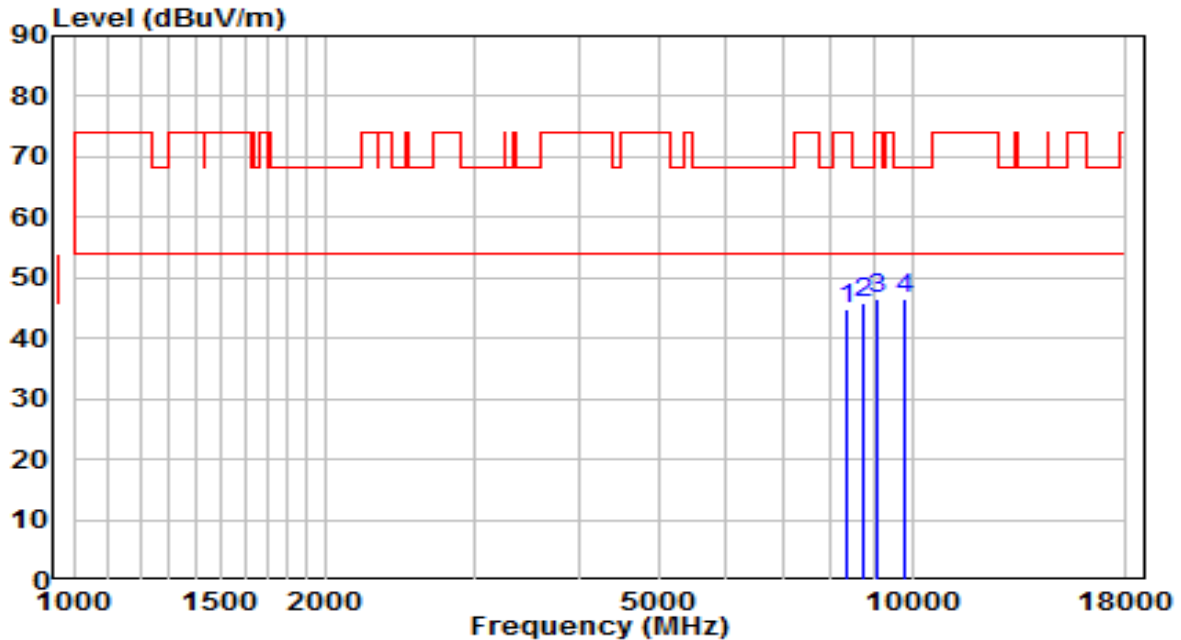


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8327.000	32.19	12.48	44.67	-29.33	74.00	Peak
2	8769.000	32.79	13.11	45.91	-22.29	68.20	Peak
3	9092.000	32.68	13.82	46.50	-27.50	74.00	Peak
4	* 9823.000	31.56	15.03	46.59	-21.61	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5500MHz	Test Voltage	120V/50Hz

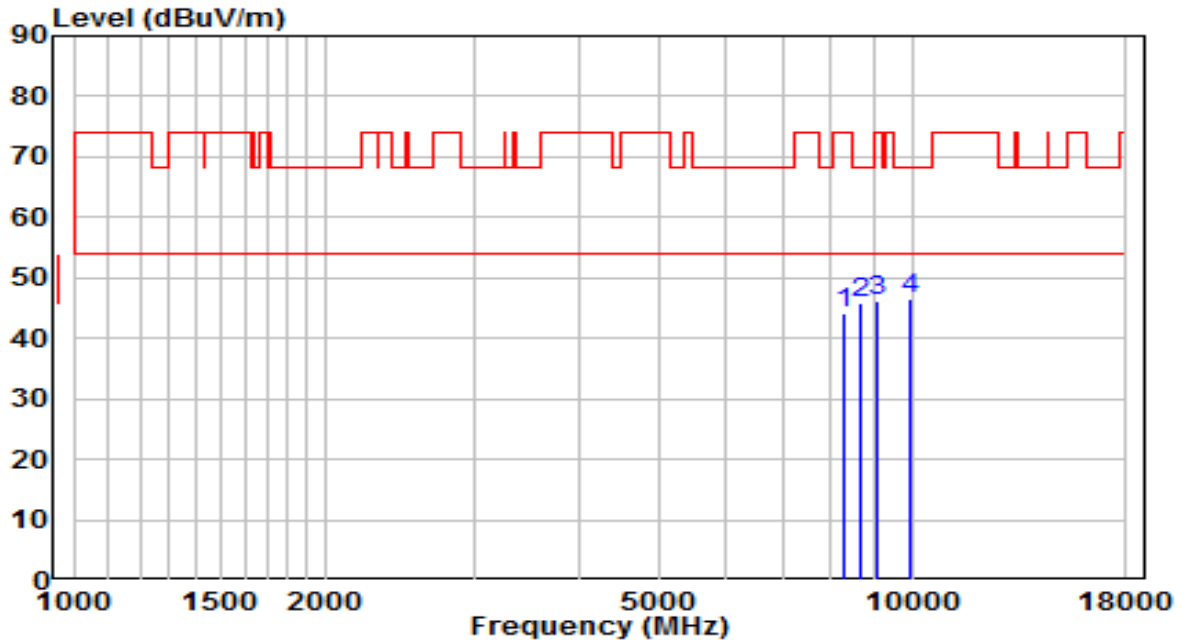


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8284.500	31.53	12.49	44.02	-29.98	74.00	Peak
2	8709.500	32.97	12.97	45.94	-22.26	68.20	Peak
3	9109.000	32.46	13.84	46.30	-27.70	74.00	Peak
4	* 9950.500	31.20	15.27	46.47	-21.73	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5580MHz	Test Voltage	120V/50Hz

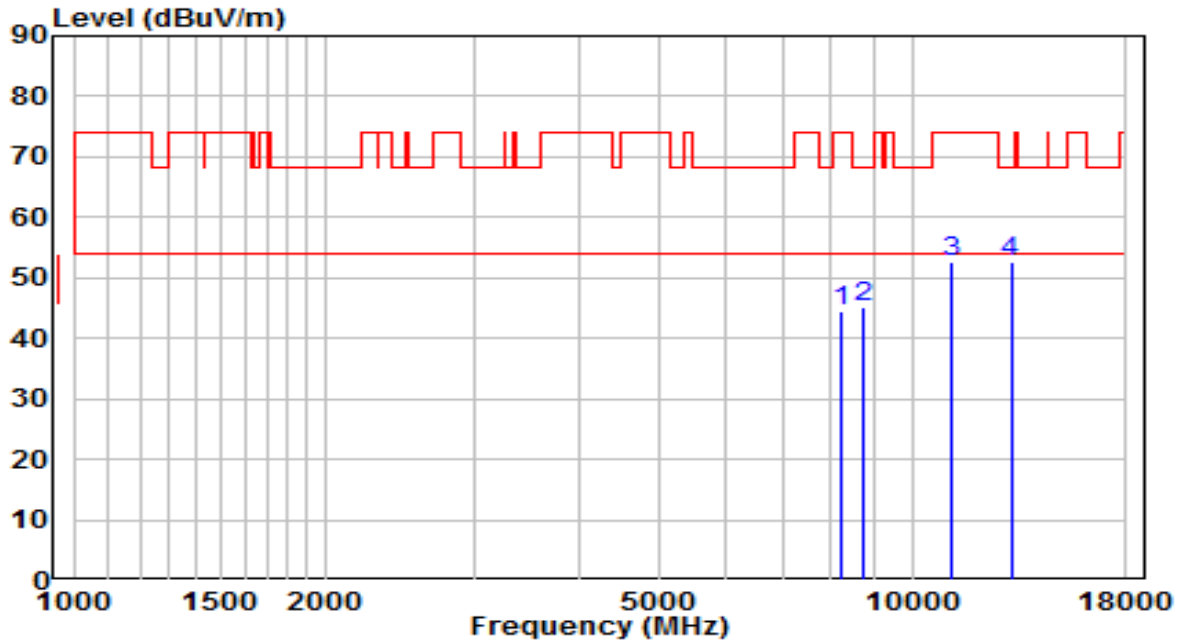


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8259.000	32.17	12.49	44.66	-29.34	74.00	Peak
2	8726.500	32.17	13.01	45.18	-23.02	68.20	Peak
3	* 11166.000	28.66	18.00	46.66	-7.34	54.00	Average
4	11166.000	34.59	18.00	52.59	-21.41	74.00	Peak
5	12959.500	31.52	19.18	50.70	-17.50	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5580MHz	Test Voltage	120V/50Hz

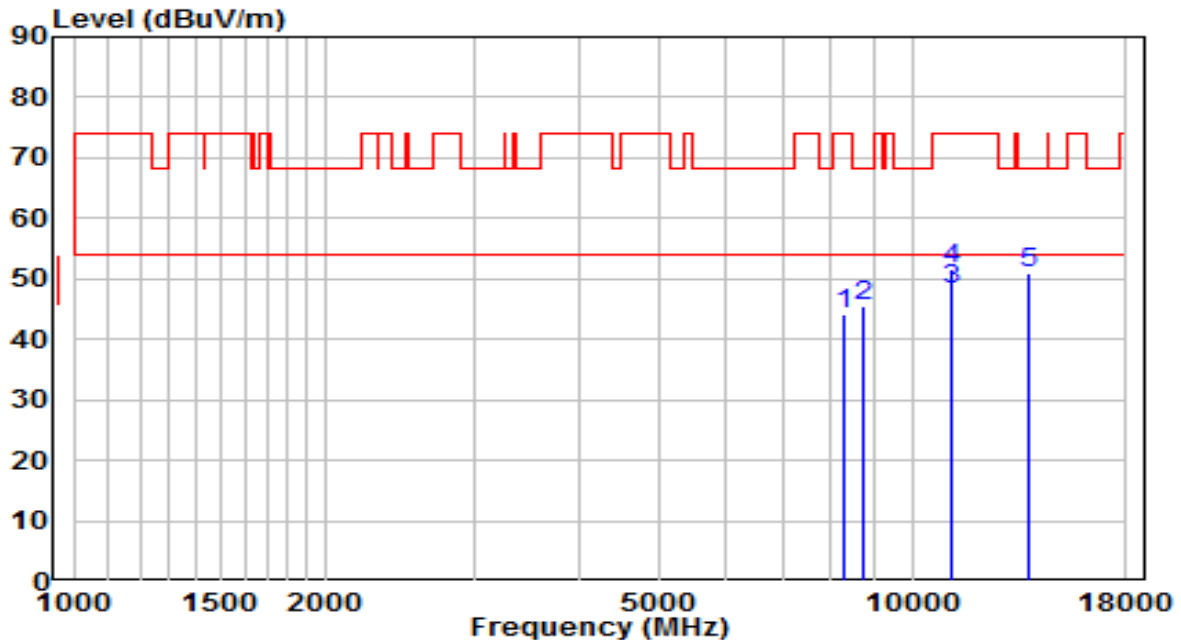


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8293.000	31.83	12.49	44.32	-29.68	74.00	Peak
2	8760.500	32.50	13.09	45.59	-22.61	68.20	Peak
3	* 11157.500	30.16	17.99	48.15	-5.85	54.00	Average
4	11157.500	33.69	17.99	51.68	-22.32	74.00	Peak
5	13758.500	29.97	21.05	51.02	-17.18	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5700MHz	Test Voltage	120V/50Hz

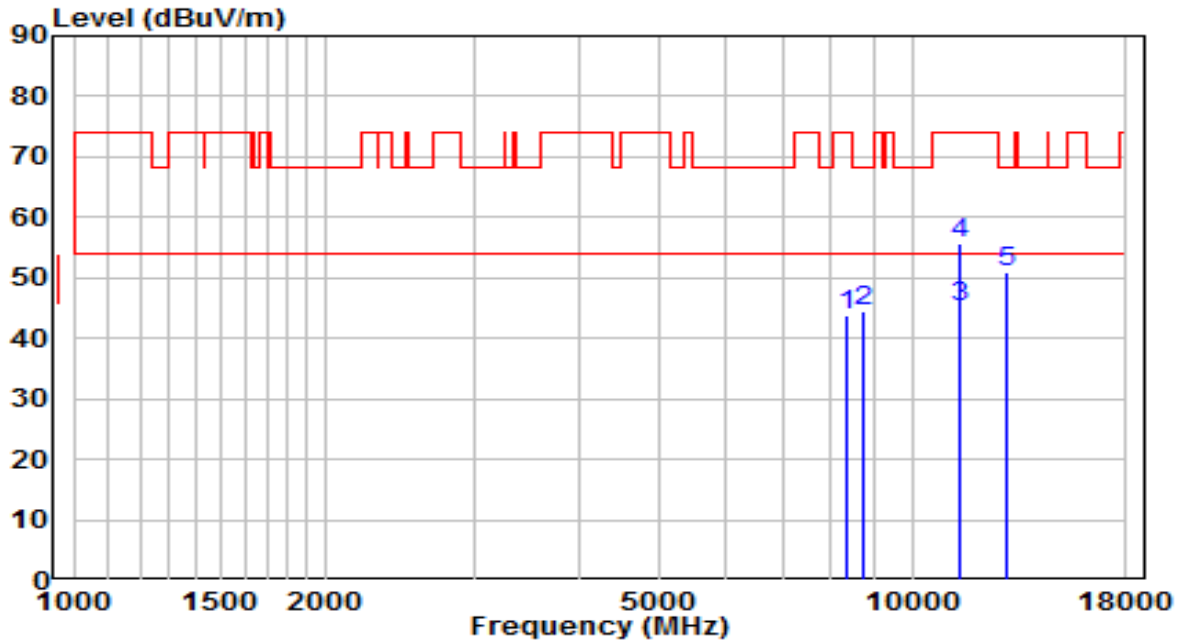


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8378.000	31.44	12.47	43.91	-30.09	74.00	Peak
2	8735.000	31.48	13.03	44.51	-23.69	68.20	Peak
3	* 11404.000	26.69	18.32	45.01	-8.99	54.00	Average
4	11404.000	37.43	18.32	55.75	-18.25	74.00	Peak
5	12976.500	31.64	19.22	50.87	-17.33	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5700MHz	Test Voltage	120V/50Hz

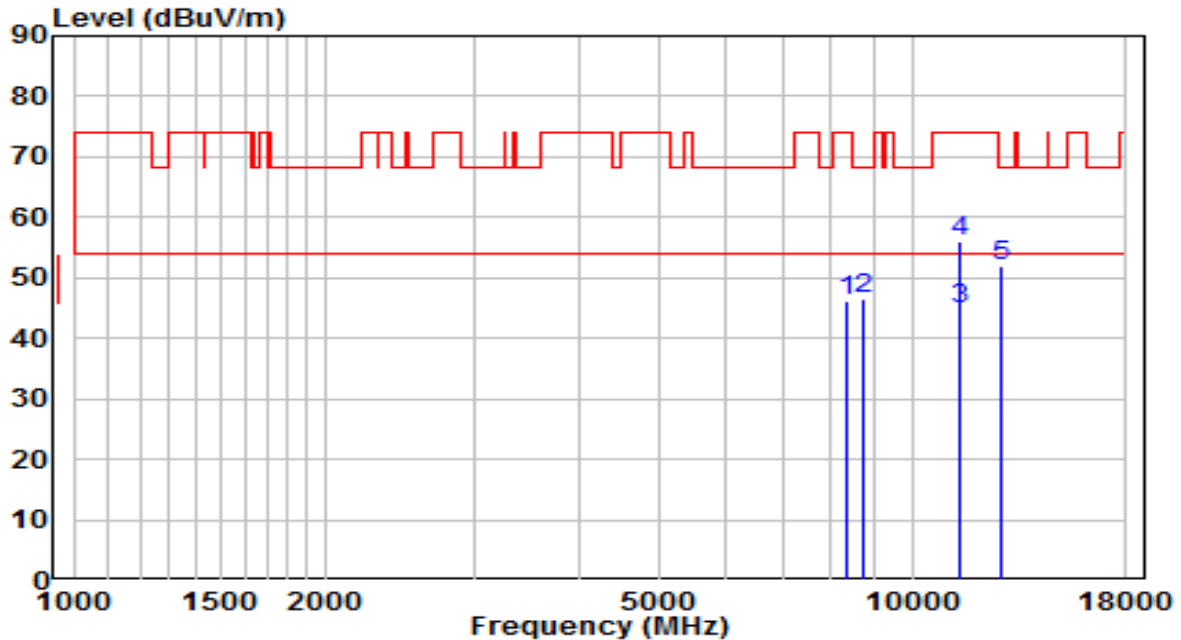


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8335.500	33.74	12.48	46.22	-27.78	74.00	Peak
2	8769.000	33.34	13.11	46.46	-21.74	68.20	Peak
3	* 11395.500	26.59	18.31	44.90	-9.10	54.00	Average
4	11395.500	37.61	18.31	55.92	-18.08	74.00	Peak
5	12781.000	33.20	18.68	51.88	-16.32	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5720MHz	Test Voltage	120V/50Hz

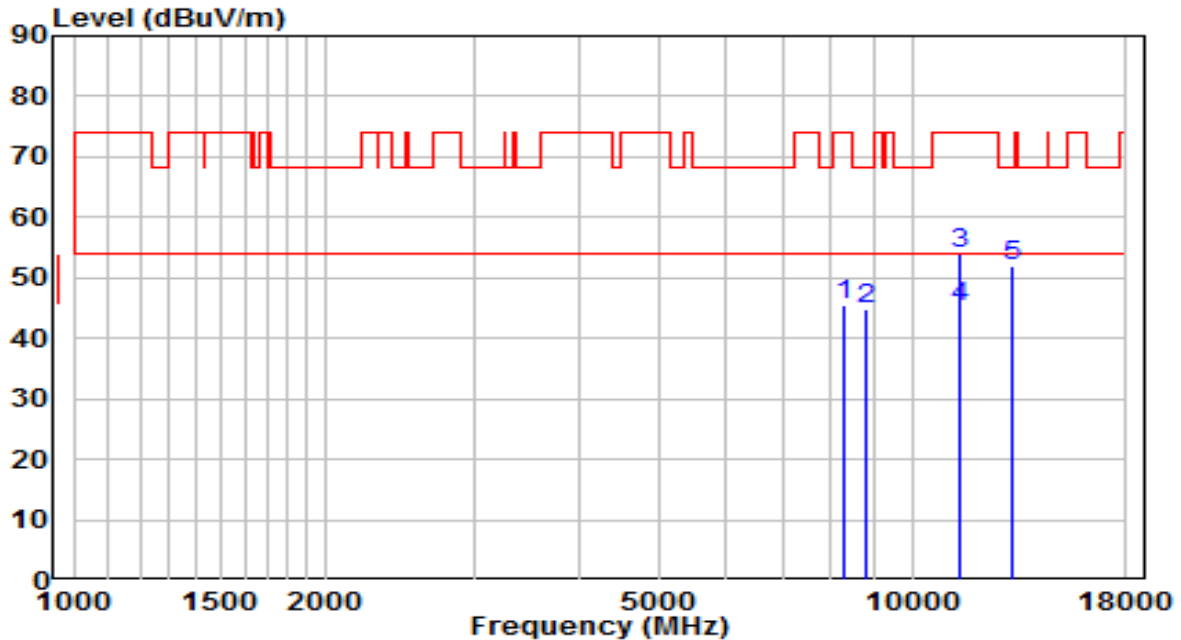


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8318.500	33.07	12.48	45.56	-28.44	74.00	Peak
2	8837.000	31.53	13.28	44.81	-23.39	68.20	Peak
3	11438.000	35.59	18.37	53.96	-20.04	74.00	Peak
4	* 11438.000	26.96	18.37	45.33	-8.67	54.00	Average
5	13146.500	32.38	19.66	52.04	-16.16	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5720MHz	Test Voltage	120V/50Hz

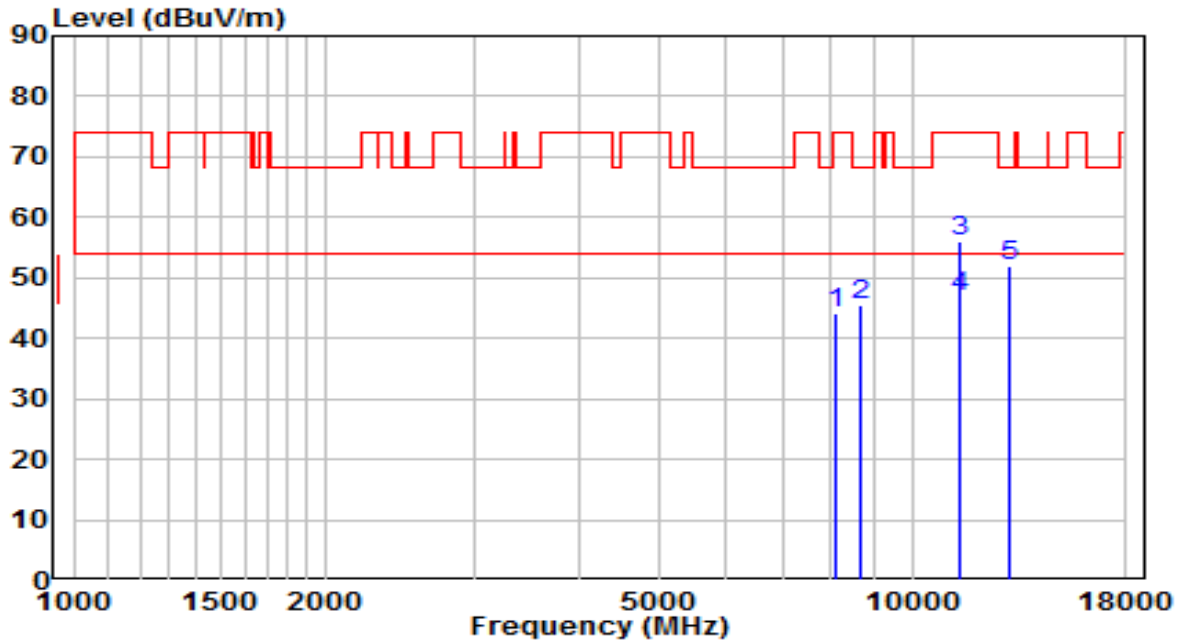


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8123.000	31.71	12.51	44.22	-29.78	74.00	Peak
2	8692.500	32.45	12.93	45.38	-22.82	68.20	Peak
3	11438.000	37.75	18.37	56.12	-17.88	74.00	Peak
4	* 11438.000	28.40	18.37	46.77	-7.23	54.00	Average
5	13061.500	32.61	19.45	52.06	-16.14	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5745MHz	Test Voltage	120V/60Hz

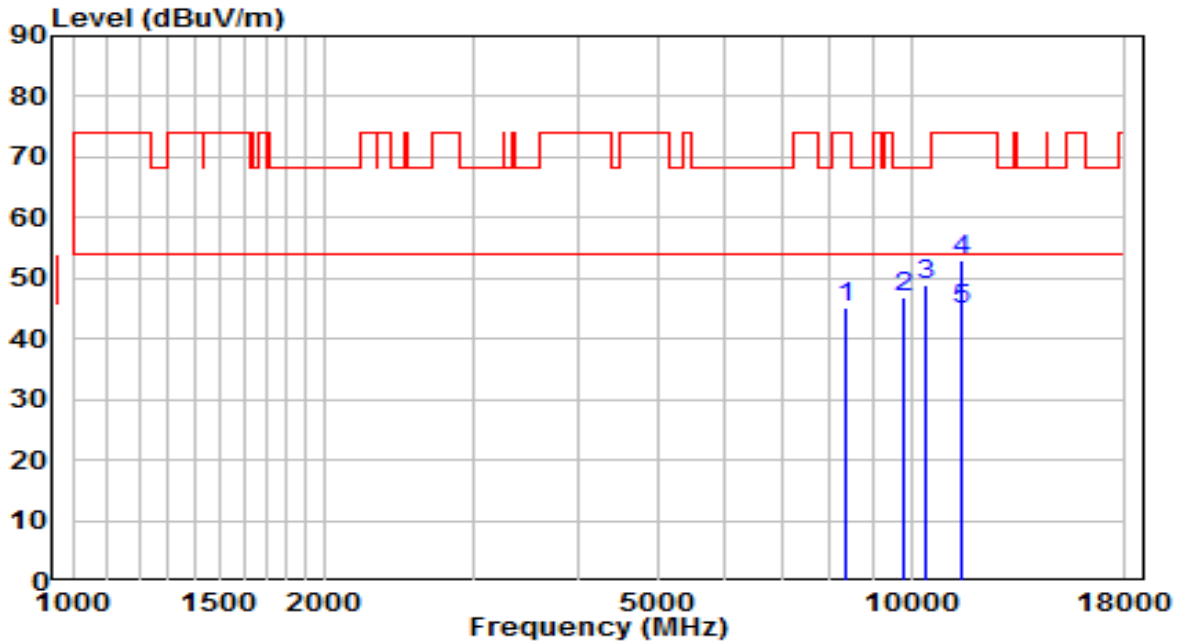


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8352.500	32.67	12.48	45.15	-28.85	74.00	Peak
2	9789.000	31.90	14.96	46.86	-21.34	68.20	Peak
3	10384.000	32.22	16.67	48.89	-19.31	68.20	Peak
4	11489.000	34.43	18.44	52.86	-21.14	74.00	Peak
5	* 11489.000	26.51	18.44	44.95	-9.05	54.00	Average

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5745MHz	Test Voltage	120V/60Hz

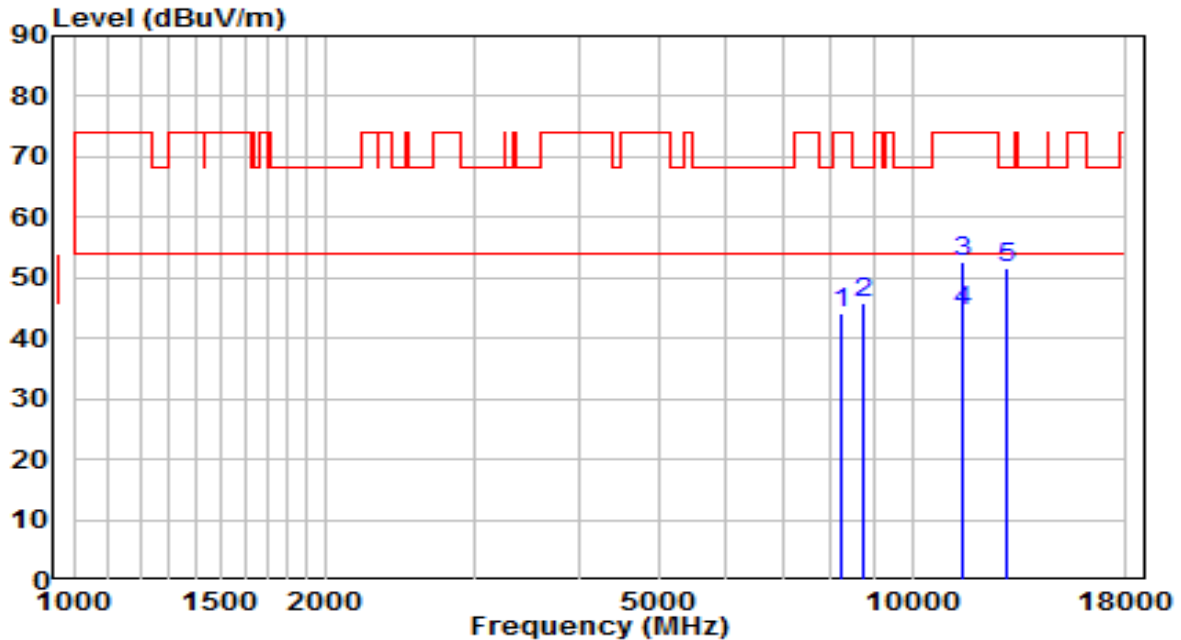


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8225.000	31.81	12.50	44.31	-29.69	74.00	Peak
2	8752.000	32.78	13.07	45.85	-22.35	68.20	Peak
3	11489.000	34.14	18.44	52.57	-21.43	74.00	Peak
4	* 11489.000	25.91	18.44	44.35	-9.65	54.00	Average
5	12942.500	32.44	19.13	51.57	-16.63	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5785MHz	Test Voltage	120V/60Hz

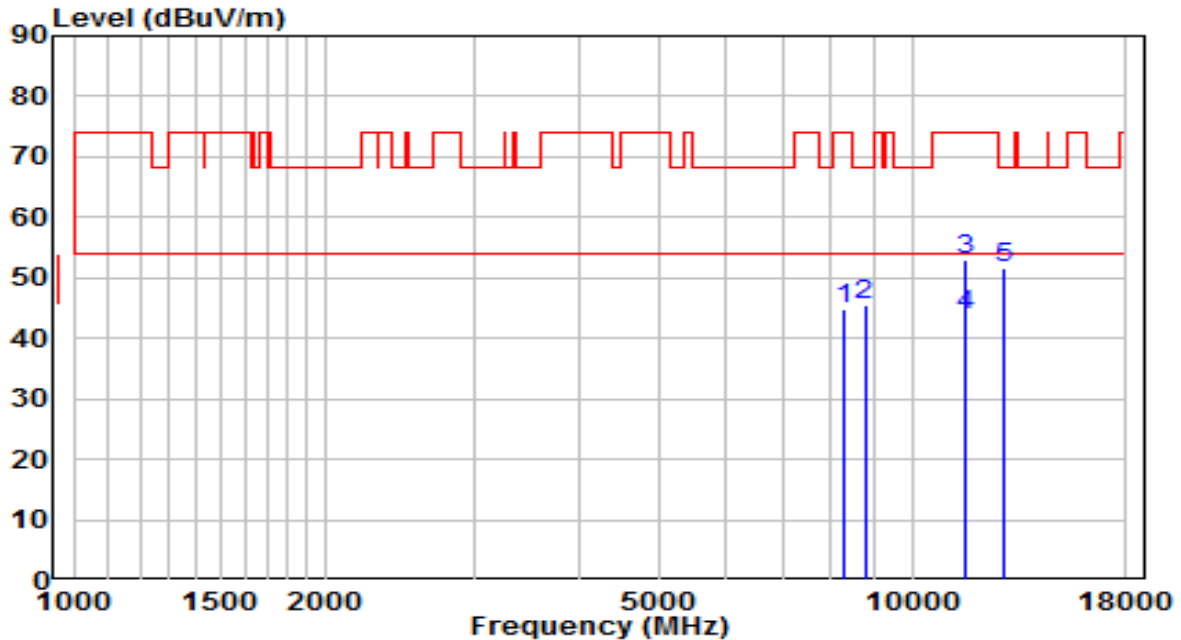


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8310.000	32.39	12.48	44.87	-29.13	74.00	Peak
2	8777.500	32.36	13.13	45.49	-22.71	68.20	Peak
3	11574.000	34.71	18.36	53.07	-20.93	74.00	Peak
4	* 11574.000	25.37	18.36	43.73	-10.27	54.00	Average
5	12874.500	32.52	18.94	51.46	-16.74	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5785MHz	Test Voltage	120V/60Hz

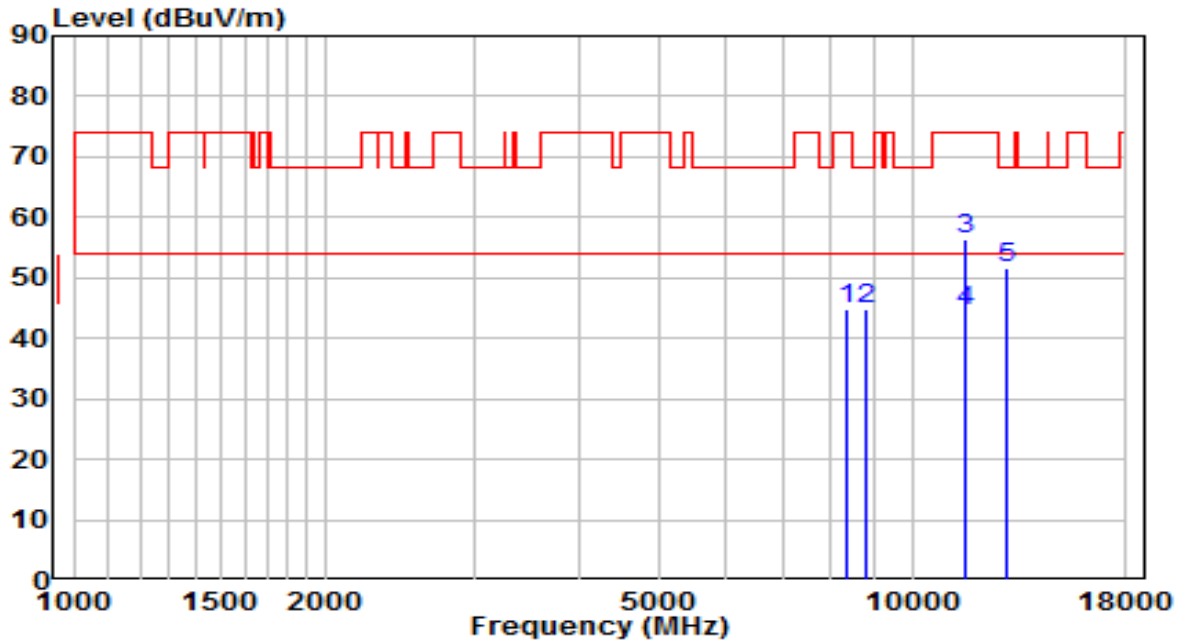


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8335.500	32.30	12.48	44.78	-29.22	74.00	Peak
2	8794.500	31.72	13.18	44.89	-23.31	68.20	Peak
3	11574.000	38.12	18.36	56.47	-17.53	74.00	Peak
4	* 11574.000	26.19	18.36	44.54	-9.46	54.00	Average
5	12934.000	32.40	19.11	51.51	-16.69	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5825MHz	Test Voltage	120V/60Hz

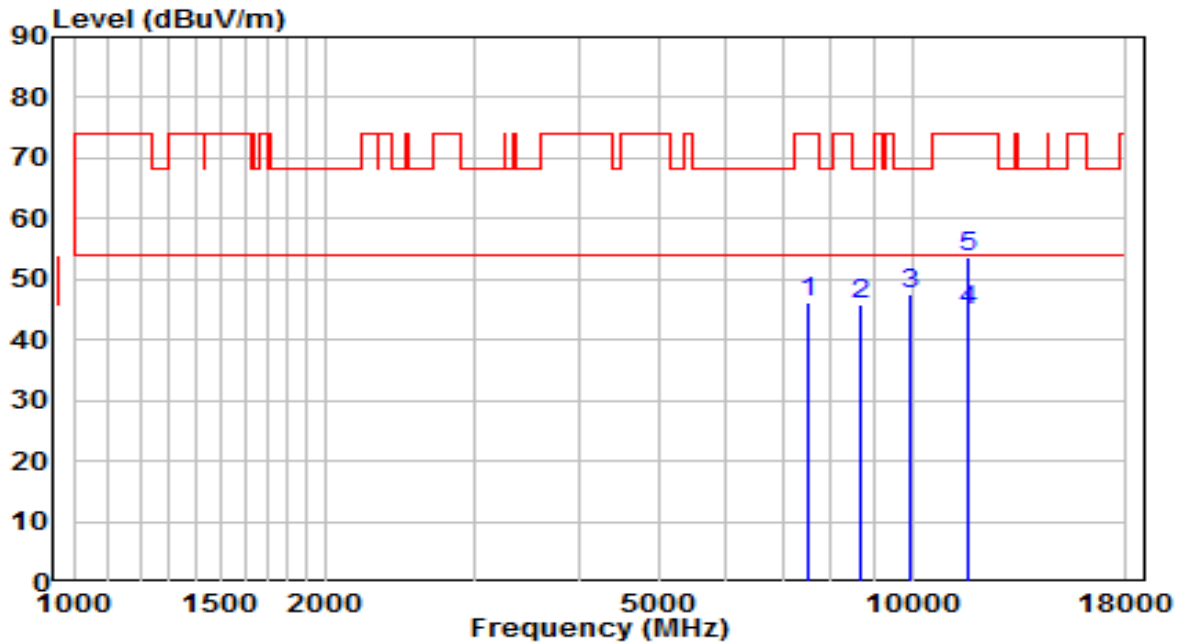


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7528.000	34.26	11.76	46.02	-27.98	74.00	Peak
2	8667.000	33.04	12.86	45.91	-22.29	68.20	Peak
3	9925.000	32.29	15.22	47.51	-20.69	68.20	Peak
4	* 11650.000	26.54	18.26	44.80	-9.20	54.00	Average
5	11650.500	35.50	18.26	53.76	-20.24	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5825MHz	Test Voltage	120V/60Hz

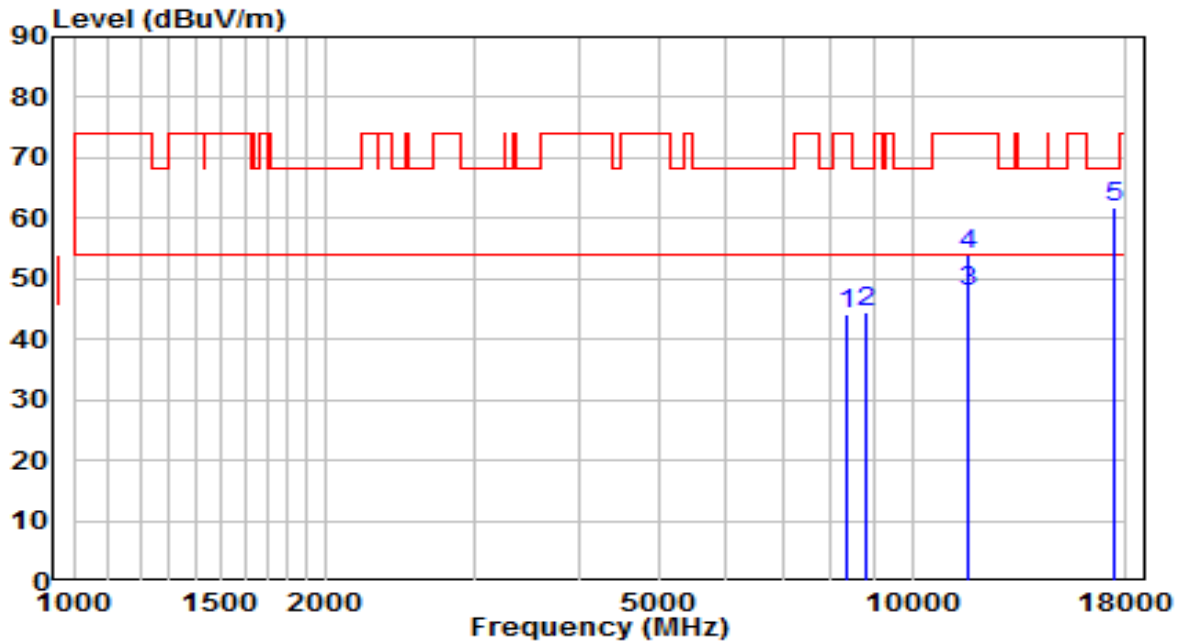


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8327.000	31.68	12.48	44.16	-29.84	74.00	Peak
2	8794.500	31.48	13.18	44.66	-23.54	68.20	Peak
3	* 11650.500	29.55	18.26	47.81	-6.19	54.00	Average
4	11650.500	35.69	18.26	53.95	-20.05	74.00	Peak
5	17473.000	31.53	30.37	61.90	-6.30	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5180MHz	Test Voltage	120V/60Hz

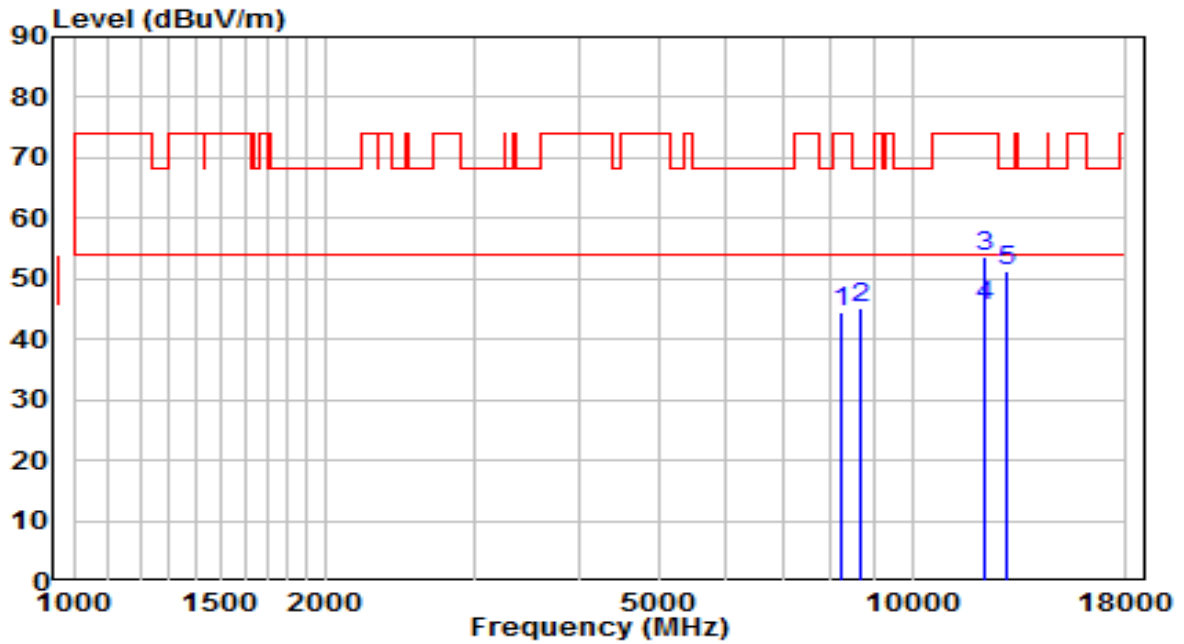


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8225.000	31.89	12.50	44.38	-29.62	74.00	Peak
2	8701.000	32.18	12.95	45.12	-23.08	68.20	Peak
3	12220.000	35.64	17.86	53.50	-20.50	74.00	Peak
4	* 12220.000	27.65	17.86	45.51	-8.49	54.00	Average
5	12968.000	31.96	19.20	51.16	-17.04	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5180MHz	Test Voltage	120V/60Hz

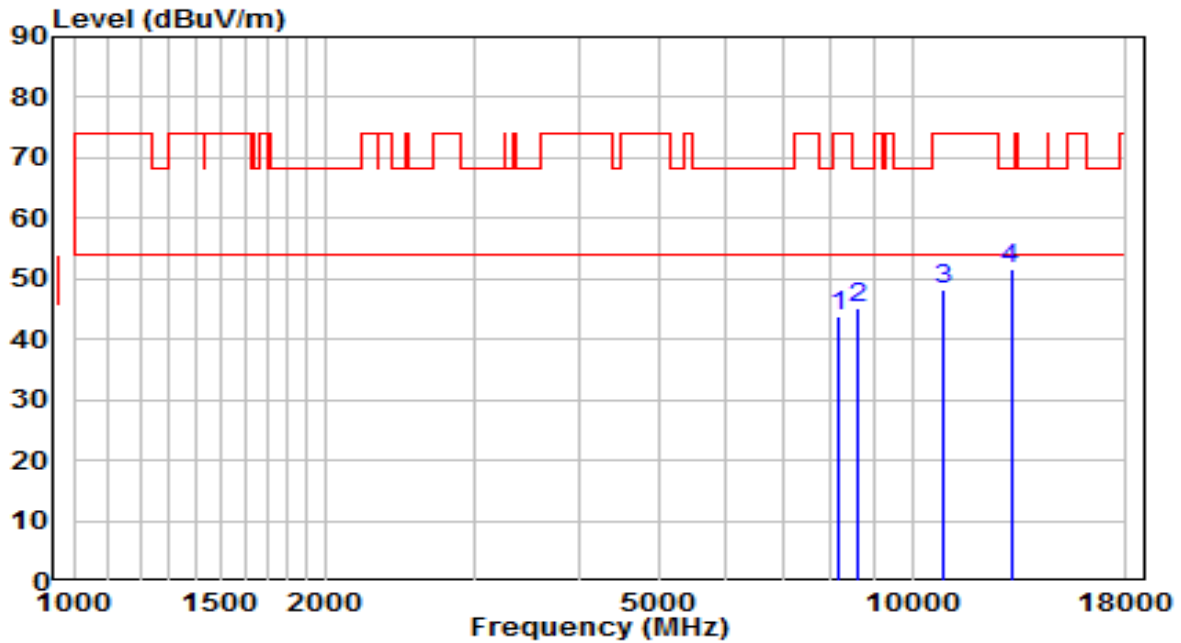


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8174.000	31.39	12.50	43.90	-30.10	74.00	Peak
2	8607.500	32.48	12.72	45.19	-23.01	68.20	Peak
3	10894.000	30.61	17.63	48.24	-25.76	74.00	Peak
4	* 13112.500	32.01	19.57	51.58	-16.62	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5220MHz	Test Voltage	120V/60Hz

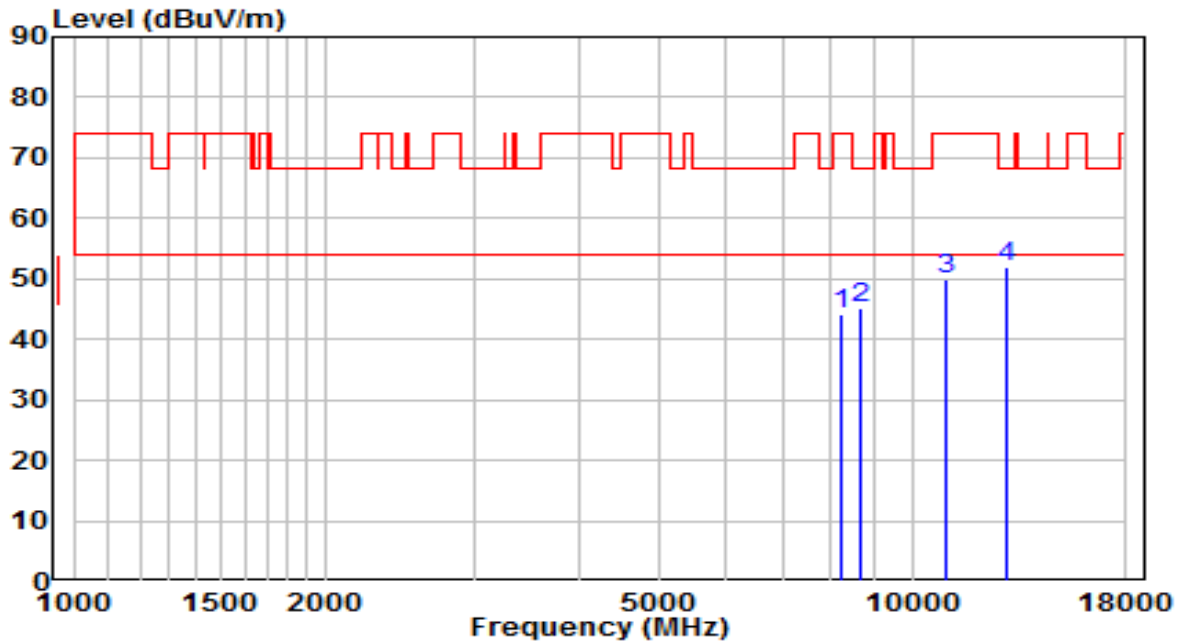


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8208.000	31.70	12.50	44.20	-29.80	74.00	Peak
2	8701.000	32.25	12.95	45.19	-23.01	68.20	Peak
3	10936.500	32.24	17.69	49.93	-24.07	74.00	Peak
4	* 12985.000	32.77	19.25	52.02	-16.18	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5220MHz	Test Voltage	120V/60Hz

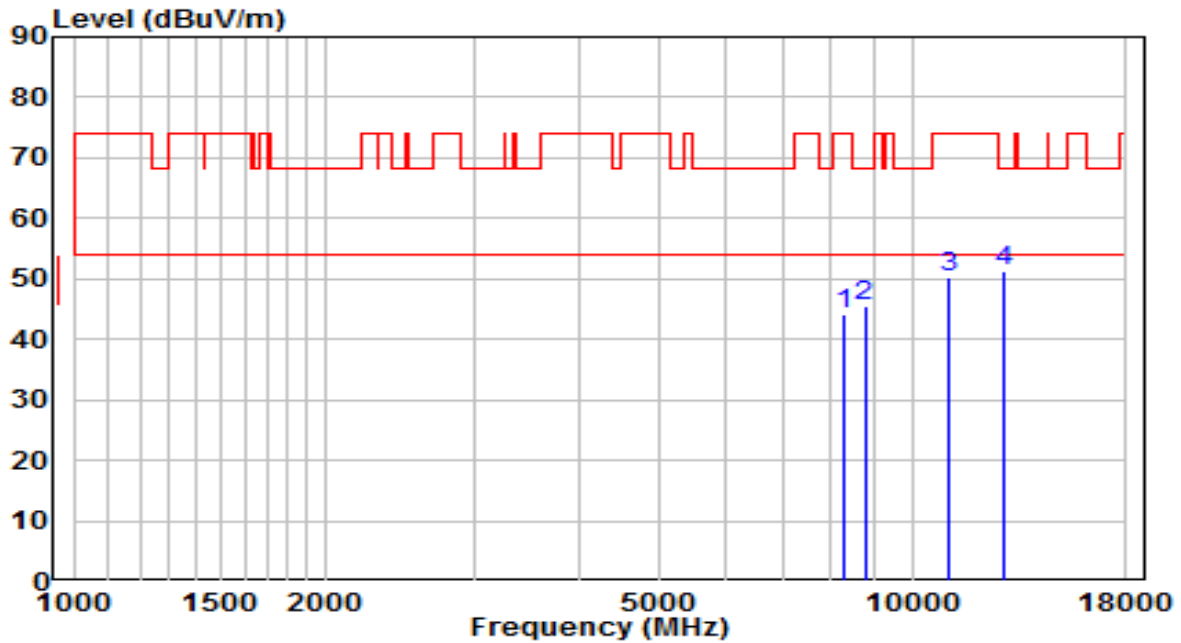


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8293.000	31.82	12.49	44.30	-29.70	74.00	Peak
2	8777.500	32.32	13.13	45.45	-22.75	68.20	Peak
3	11021.500	32.45	17.81	50.26	-23.74	74.00	Peak
4	* 12840.500	32.32	18.85	51.17	-17.03	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5240MHz	Test Voltage	120V/60Hz

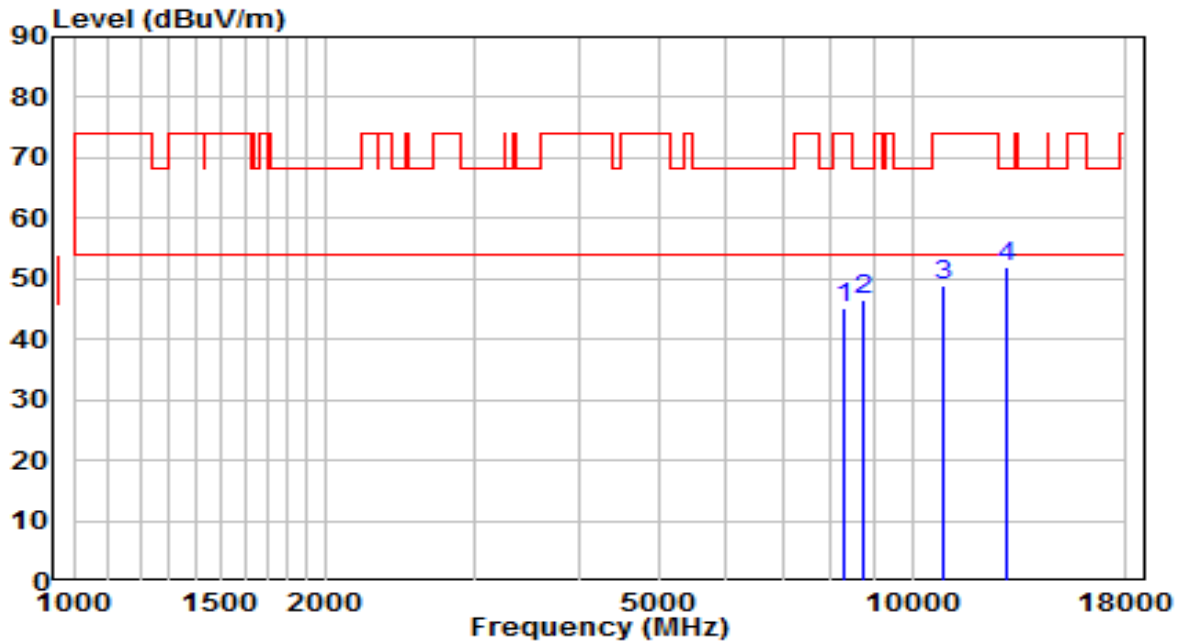


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8301.500	32.68	12.48	45.17	-28.83	74.00	Peak
2	8752.000	33.34	13.07	46.41	-21.79	68.20	Peak
3	10919.500	31.37	17.67	49.04	-24.96	74.00	Peak
4	* 12976.500	32.66	19.22	51.89	-16.31	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	19°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5240MHz	Test Voltage	120V/60Hz

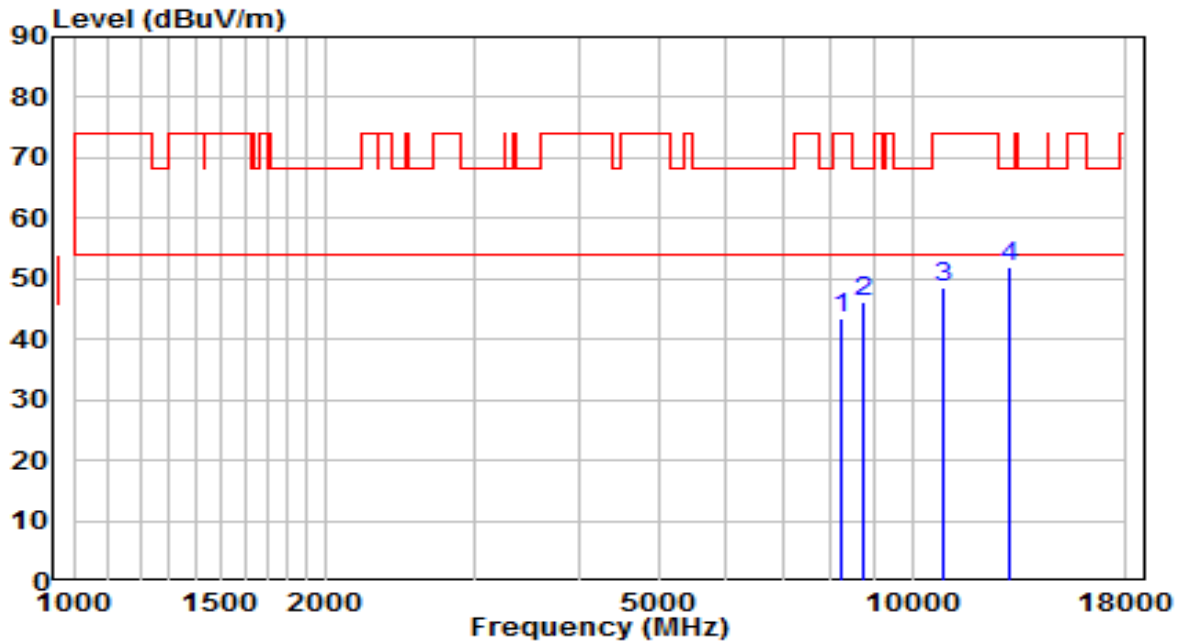


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8225.000	31.00	12.50	43.49	-30.51	74.00	Peak
2	8752.000	33.05	13.07	46.12	-22.08	68.20	Peak
3	10885.500	30.98	17.62	48.60	-25.40	74.00	Peak
4	* 13044.500	32.54	19.40	51.94	-16.26	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5260MHz	Test Voltage	120V/50Hz

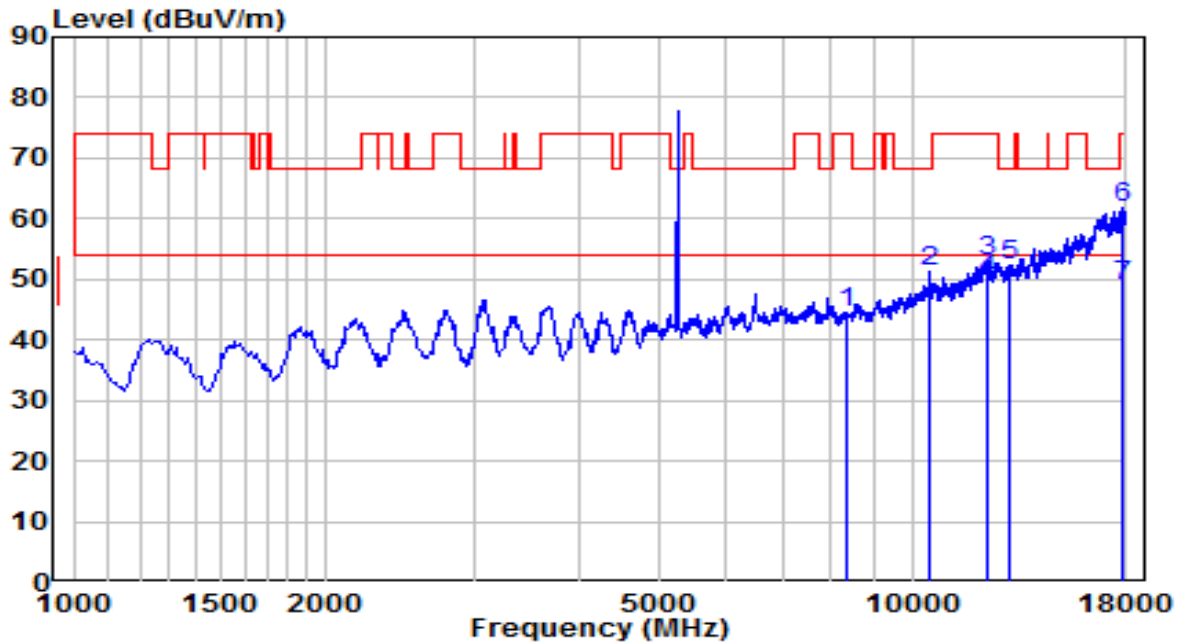


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8344.000	32.08	12.48	44.56	-29.44	74.00	Peak
2	10520.000	34.08	17.10	51.18	-17.02	68.20	Peak
3	12271.000	35.04	17.87	52.91	-21.09	74.00	Peak
4	* 12271.000	32.05	17.87	49.92	-4.08	54.00	Average
5	13027.500	32.90	19.36	52.26	-15.94	68.20	Peak
6	17804.500	30.17	31.51	61.68	-12.32	74.00	Peak
7	17804.500	17.36	31.51	48.87	-5.13	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.
5. We only show the worst case test trace for this mode.
6. Frequent between 5-6GHz is EUT 5260MHz fundamental frequency.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5260MHz	Test Voltage	120V/50Hz

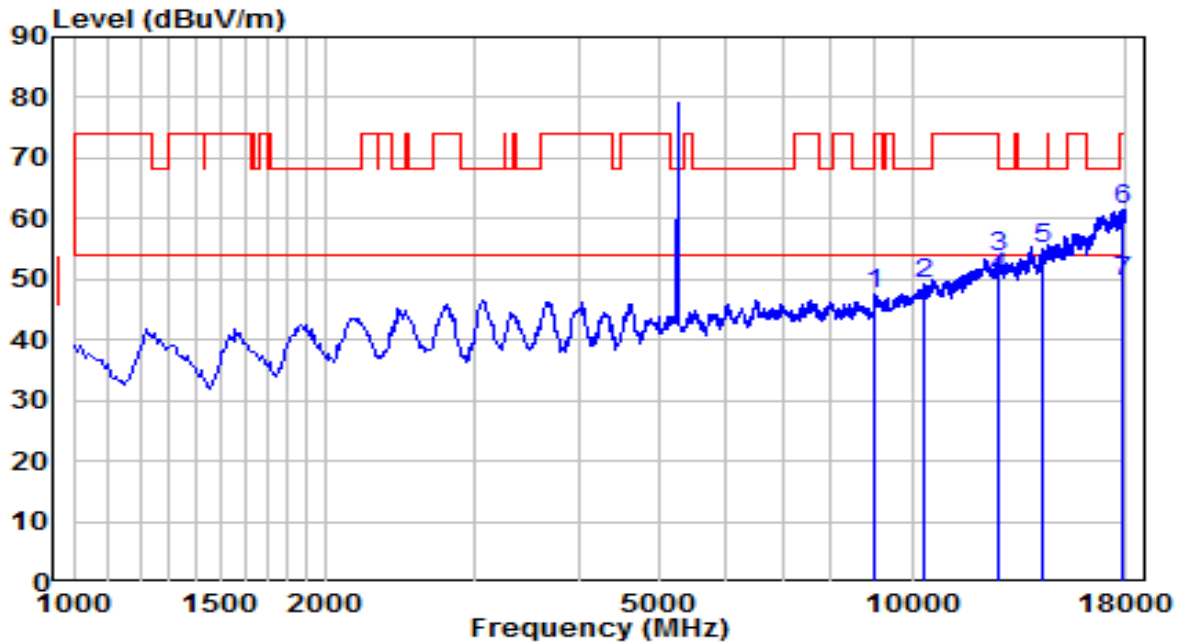


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9041.000	33.87	13.74	47.61	-26.39	74.00	Peak
2	10324.500	32.90	16.47	49.37	-18.83	68.20	Peak
3	12679.000	35.34	18.40	53.74	-20.26	74.00	Peak
4	* 12679.000	31.96	18.40	50.36	-3.64	54.00	Average
5	14268.500	33.53	21.43	54.96	-13.24	68.20	Peak
6	17830.000	29.96	31.58	61.54	-12.46	74.00	Peak
7	17830.000	18.11	31.58	49.69	-4.31	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.
5. We only show the worst case test trace for this mode.
6. Frequent between 5-6GHz is EUT 5260MHz fundamental frequency.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5300MHz	Test Voltage	120V/50Hz

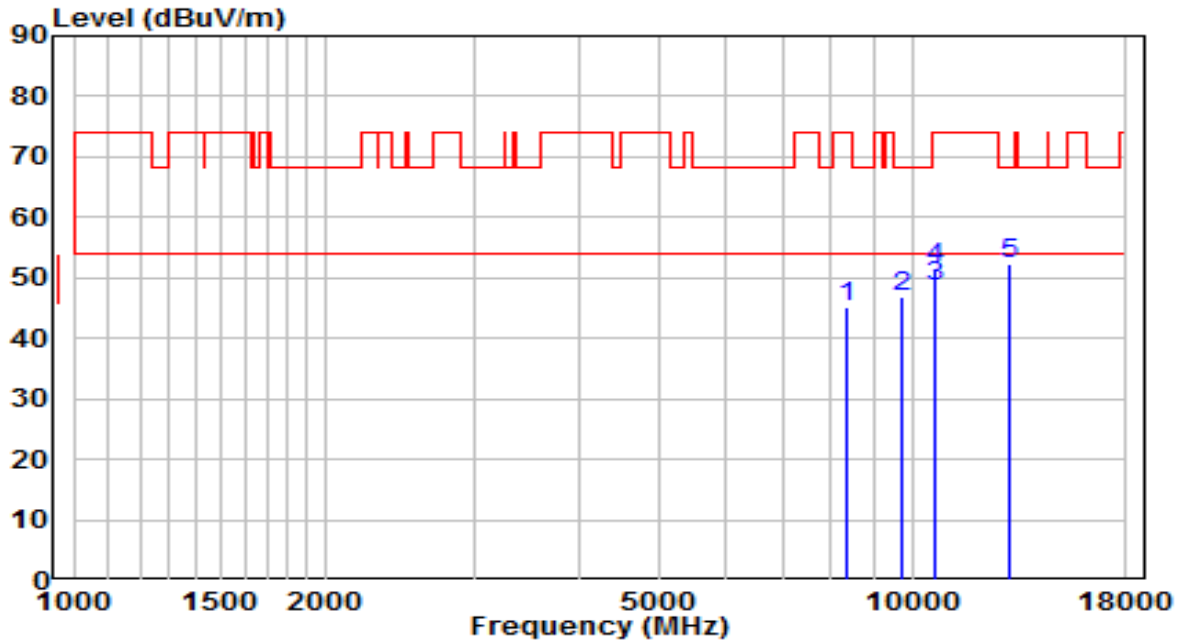


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8361.000	32.83	12.48	45.31	-28.69	74.00	Peak
2	9721.000	31.93	14.84	46.77	-21.43	68.20	Peak
3	* 10630.000	31.15	17.25	48.40	-5.60	54.00	Average
4	10630.500	34.36	17.26	51.62	-22.38	74.00	Peak
5	13087.000	32.95	19.51	52.46	-15.74	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5300MHz	Test Voltage	120V/50Hz

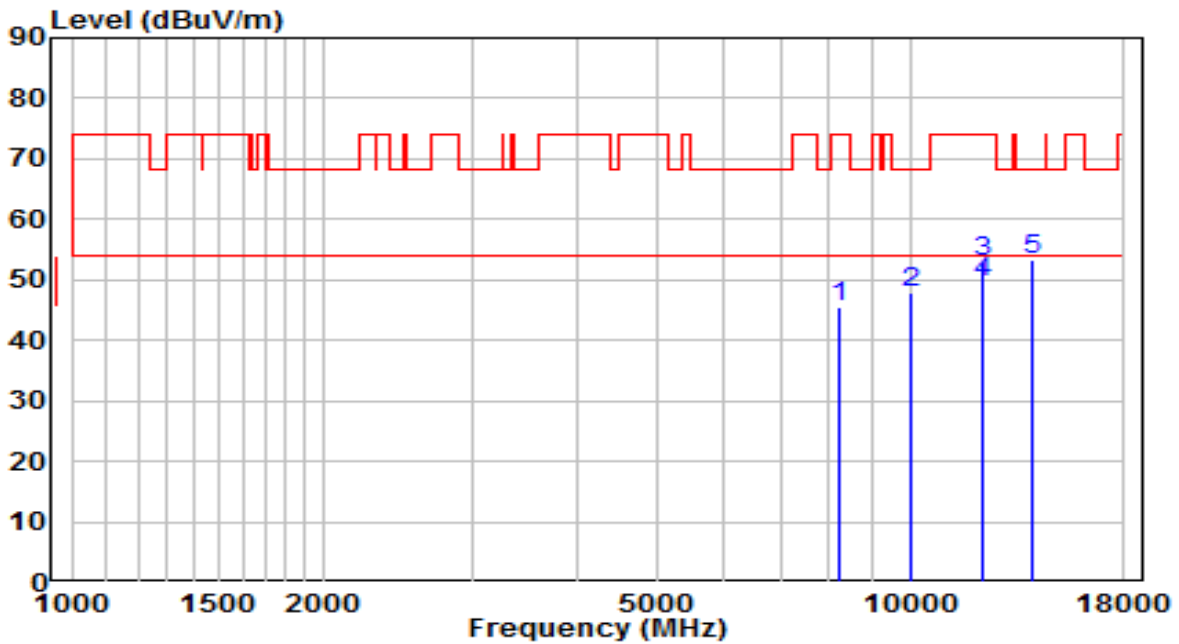


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8259.000	33.10	12.49	45.60	-28.40	74.00	Peak
2	9993.000	32.46	15.35	47.81	-20.39	68.20	Peak
3	12237.000	35.17	17.86	53.03	-20.97	74.00	Peak
4 *	12237.000	31.64	17.86	49.50	-4.50	54.00	Average
5	13962.500	31.93	21.45	53.38	-14.82	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5320MHz	Test Voltage	120V/50Hz

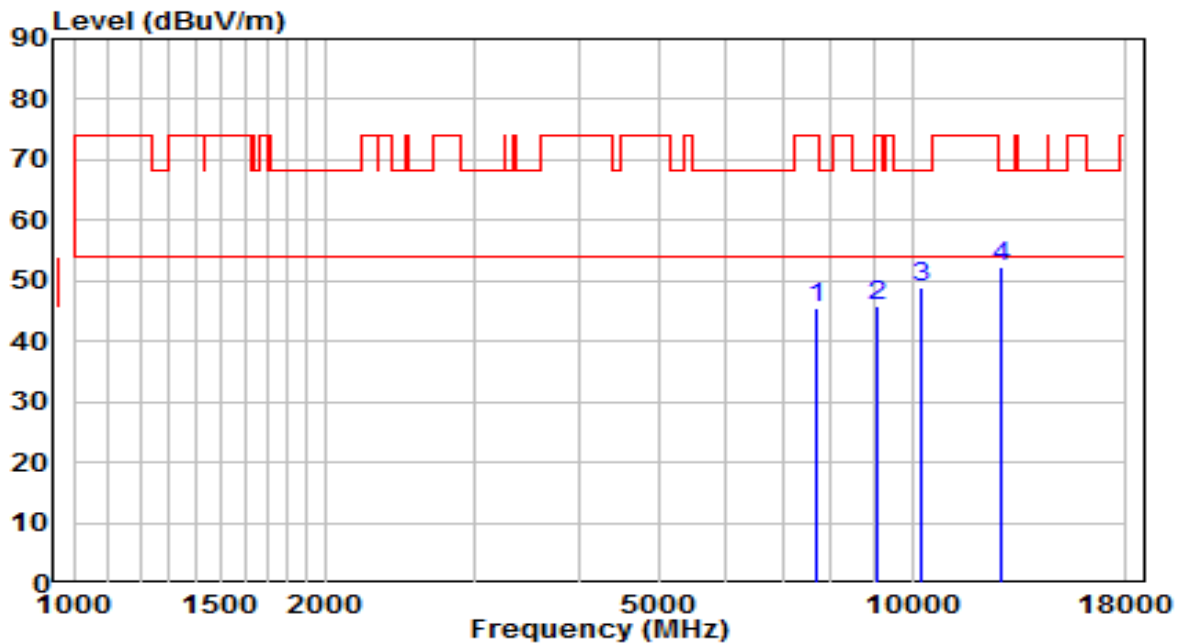


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7706.500	33.30	12.05	45.35	-28.65	74.00	Peak
2	9109.000	32.07	13.84	45.92	-28.08	74.00	Peak
3	10282.000	32.42	16.32	48.74	-19.46	68.20	Peak
4	* 12772.500	33.52	18.66	52.18	-16.02	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5320MHz	Test Voltage	120V/50Hz

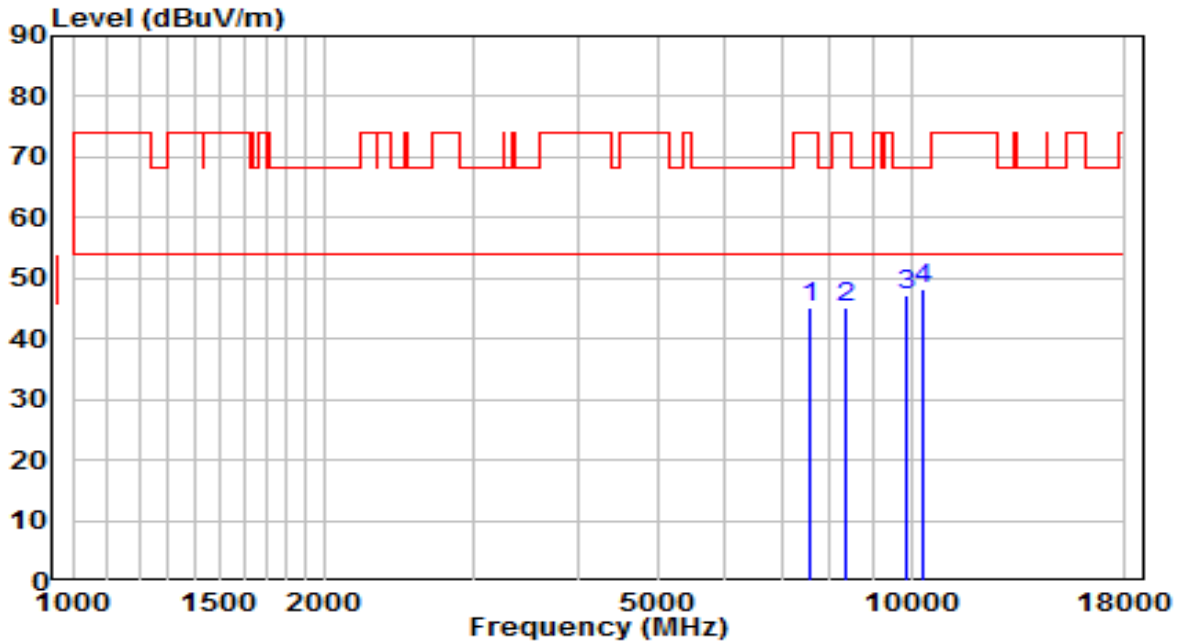


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7562.000	33.27	11.82	45.08	-28.92	74.00	Peak
2	8344.000	32.76	12.48	45.24	-28.76	74.00	Peak
3	9865.500	32.11	15.11	47.22	-20.98	68.20	Peak
4	* 10367.000	31.47	16.62	48.09	-20.11	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz	Test Voltage	120V/50Hz

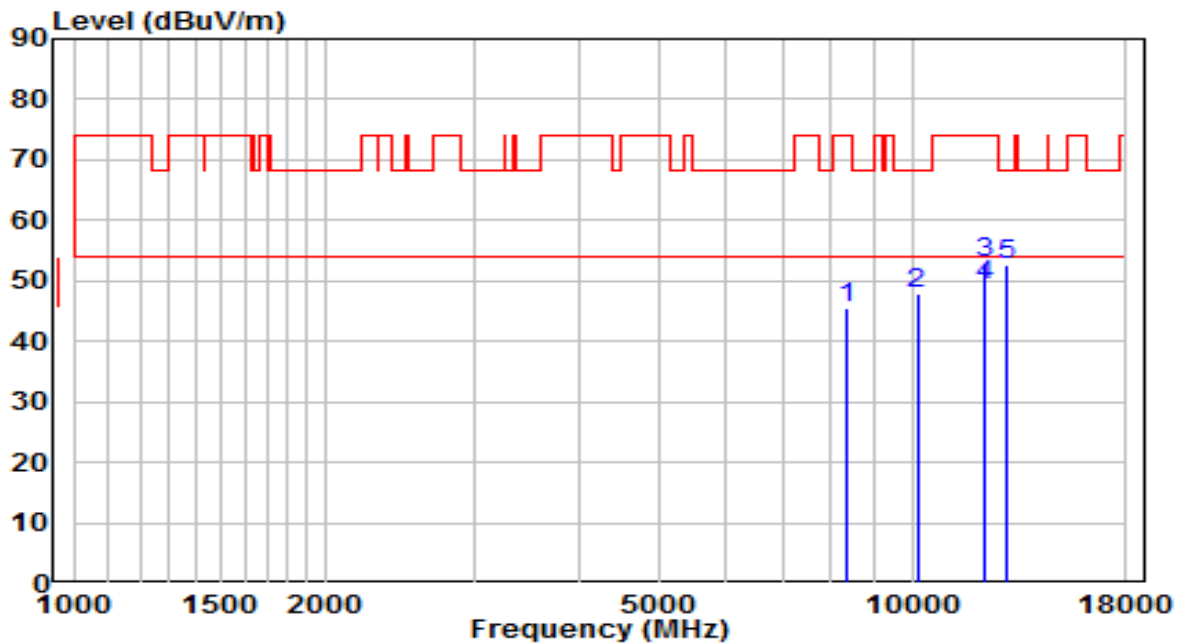


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8327.000	32.96	12.48	45.44	-28.56	74.00	Peak
2	10137.500	32.17	15.83	48.00	-20.20	68.20	Peak
3	12228.500	35.25	17.86	53.11	-20.89	74.00	Peak
4	* 12228.500	31.53	17.86	49.39	-4.61	54.00	Average
5	12993.500	33.34	19.27	52.61	-15.59	68.20	Peak

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5500MHz	Test Voltage	120V/50Hz

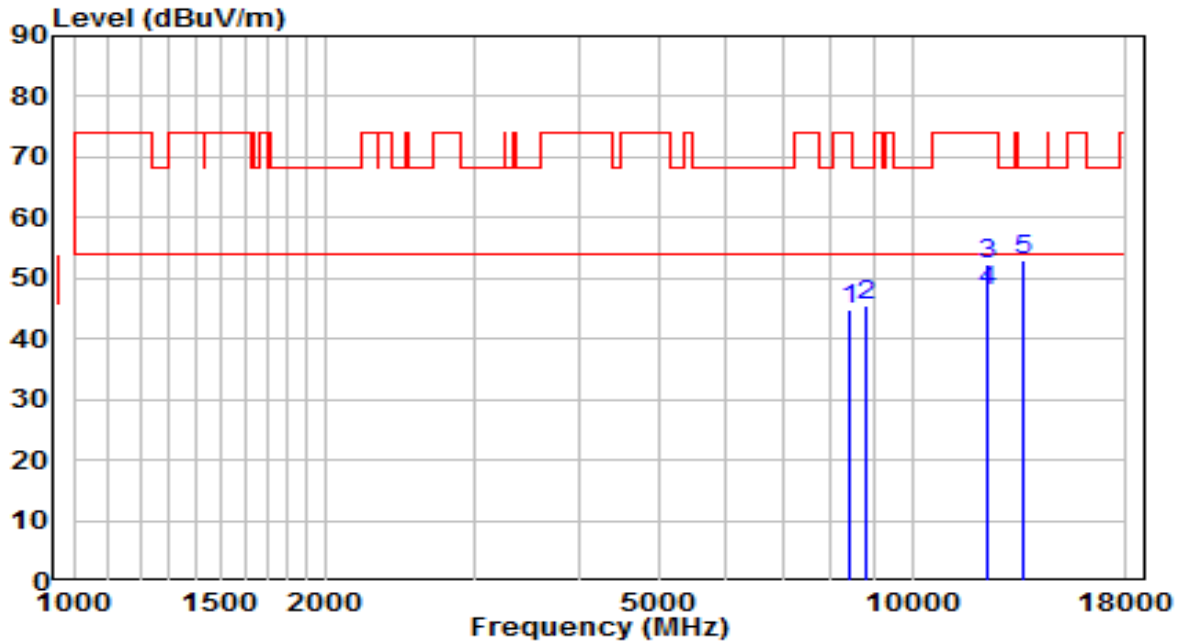


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	8395.000	32.41	12.47	44.88	-29.12	74.00	Peak
2	8828.500	32.34	13.26	45.60	-22.60	68.20	Peak
3	12288.000	34.41	17.87	52.28	-21.72	74.00	Peak
4	* 12288.000	30.16	17.87	48.03	-5.97	54.00	Average
5	13571.500	32.39	20.69	53.08	-15.12	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5580MHz	Test Voltage	120V/50Hz

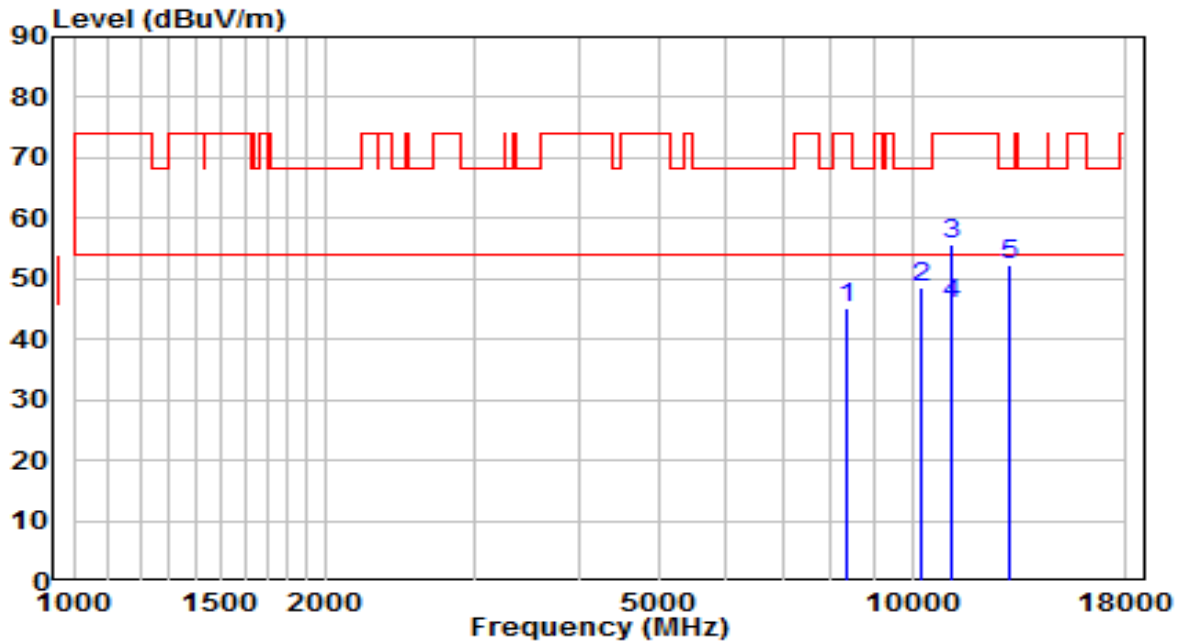


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8361.000	32.59	12.48	45.07	-28.93	74.00	Peak
2	10282.000	32.32	16.32	48.64	-19.56	68.20	Peak
3	11157.500	37.76	17.99	55.75	-18.25	74.00	Peak
4	* 11157.500	27.89	17.99	45.88	-8.12	54.00	Average
5	13053.000	32.86	19.42	52.28	-15.92	68.20	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5580MHz	Test Voltage	120V/50Hz

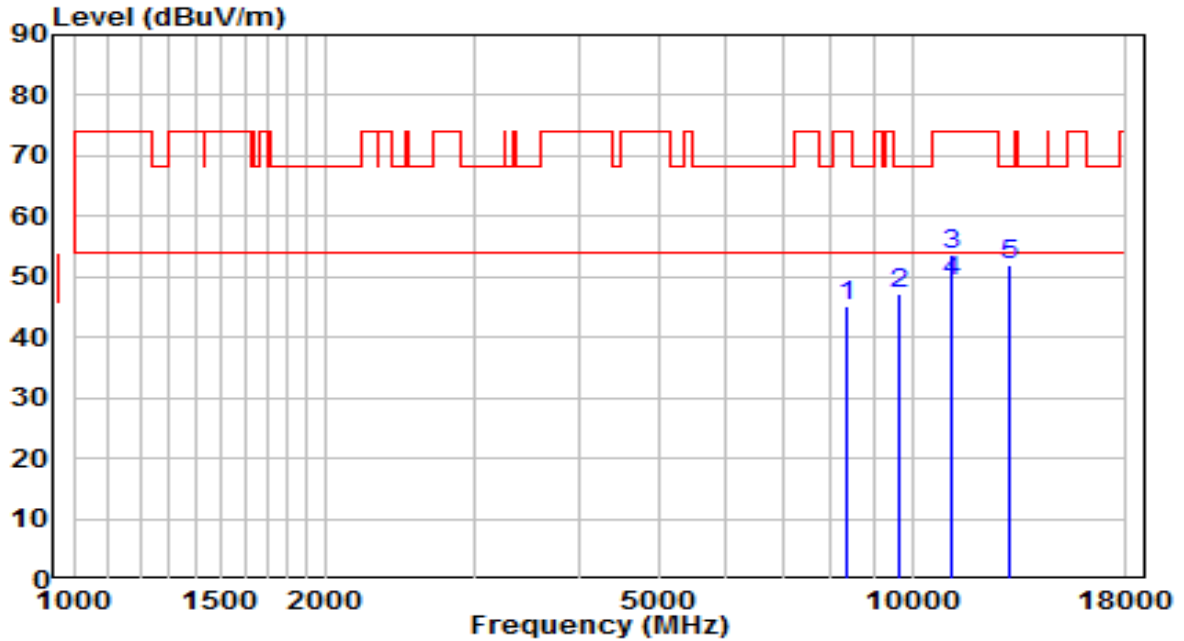


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8386.500	32.60	12.47	45.07	-28.93	74.00	Peak
2	9627.500	32.52	14.66	47.18	-21.02	68.20	Peak
3	11157.500	35.54	17.99	53.53	-20.47	74.00	Peak
4	* 11157.500	31.22	17.99	49.21	-4.79	54.00	Average
5	13070.000	32.41	19.47	51.88	-16.32	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5700MHz	Test Voltage	120V/50Hz

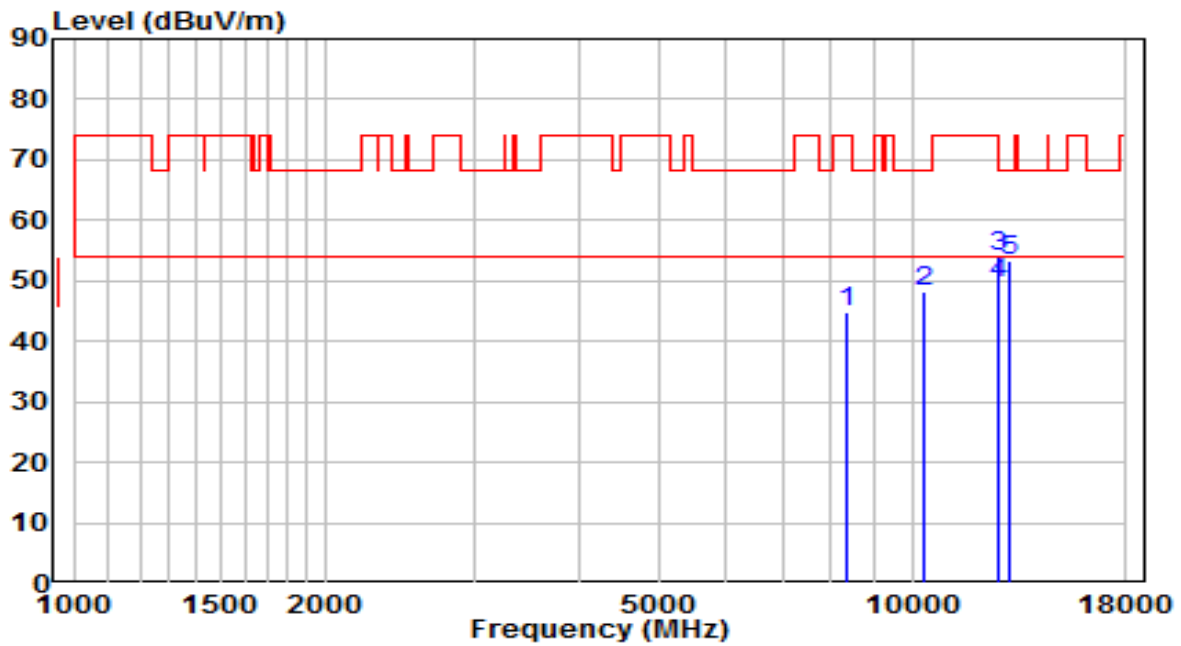


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8335.500	32.26	12.48	44.74	-29.26	74.00	Peak
2	10333.000	31.78	16.50	48.28	-19.92	68.20	Peak
3	12670.500	35.61	18.38	53.98	-20.02	74.00	Peak
4	* 12670.500	31.16	18.38	49.54	-4.46	54.00	Average
5	13104.000	33.91	19.55	53.46	-14.74	68.20	Peak

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	18.1°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at channel 5700MHz	Test Voltage	120V/50Hz

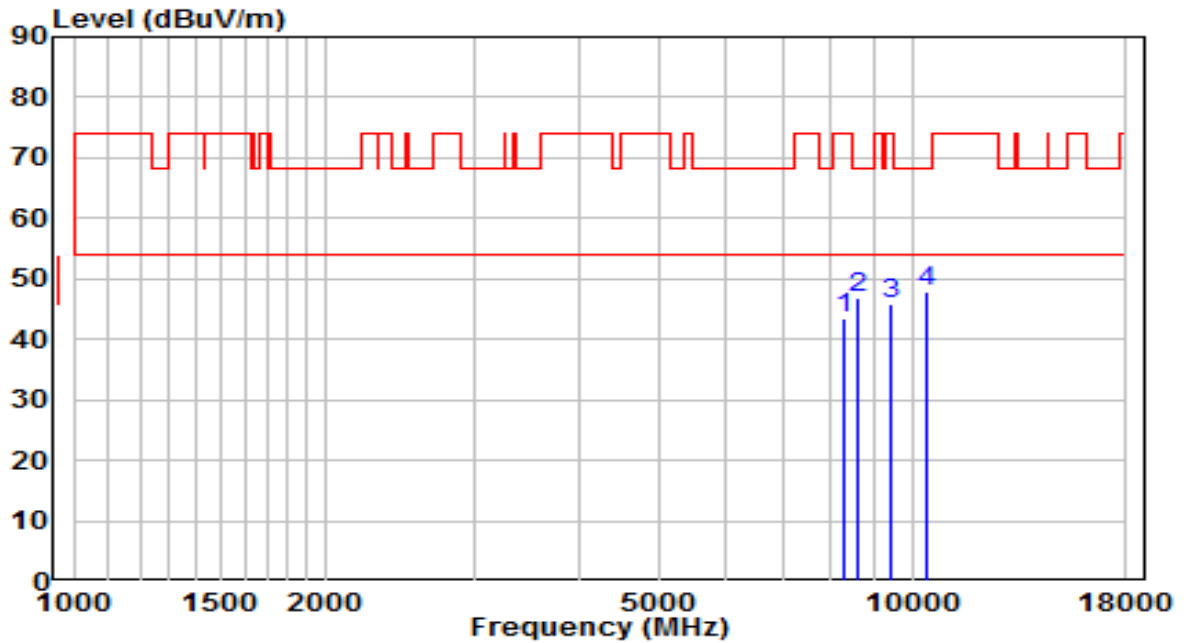


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	8267.500	31.00	12.49	43.49	-30.51	74.00	Peak
2	8599.000	34.12	12.70	46.82	-21.38	68.20	Peak
3	9423.500	31.43	14.31	45.73	-28.27	74.00	Peak
4	* 10418.000	31.03	16.79	47.82	-20.38	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5720MHz	Test Voltage	120V/60Hz

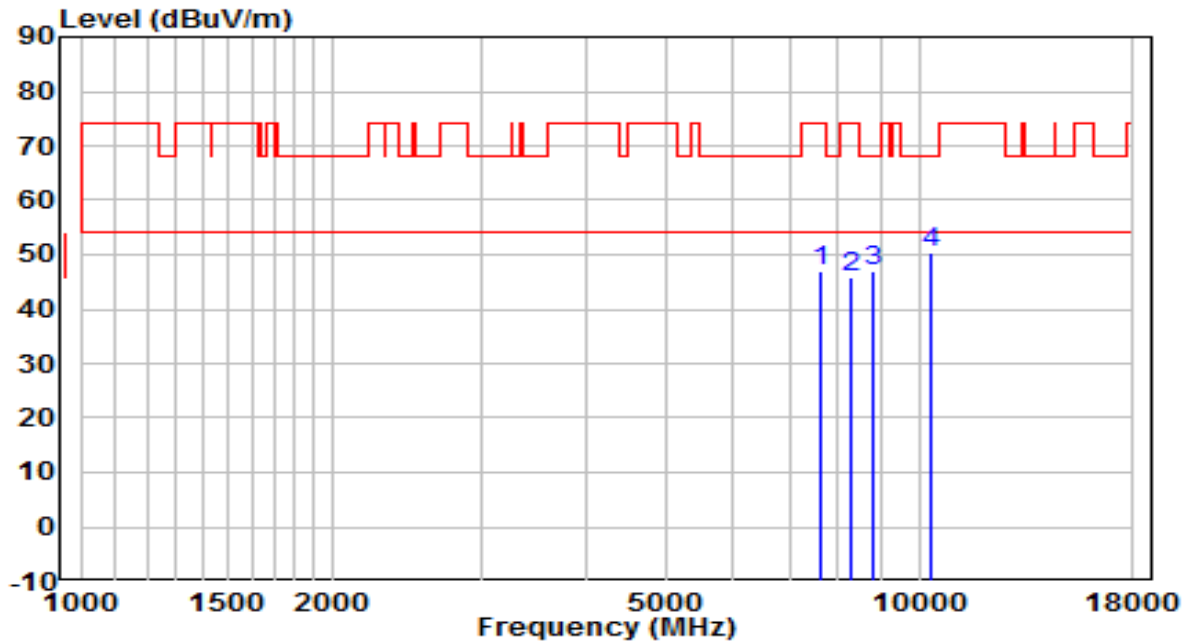


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7630.000	35.12	11.93	47.05	-26.95	74.00	Peak
2	8318.500	33.34	12.48	45.82	-28.18	74.00	Peak
3	8794.500	33.81	13.18	46.98	-21.22	68.20	Peak
4	* 10324.500	33.82	16.47	50.29	-17.91	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5720MHz	Test Voltage	120V/60Hz

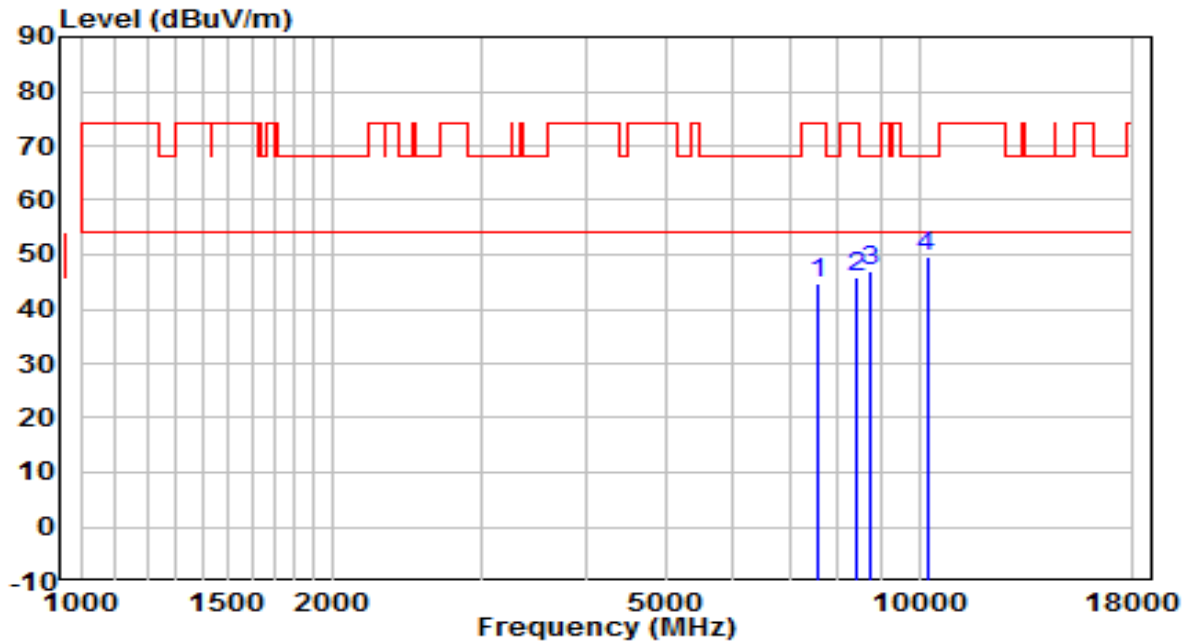


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7587.500	32.76	11.86	44.62	-29.38	74.00	Peak
2	8412.000	33.41	12.47	45.88	-28.12	74.00	Peak
3	8752.000	33.91	13.07	46.98	-21.22	68.20	Peak
4	* 10214.000	33.36	16.09	49.46	-18.74	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	120V/60Hz

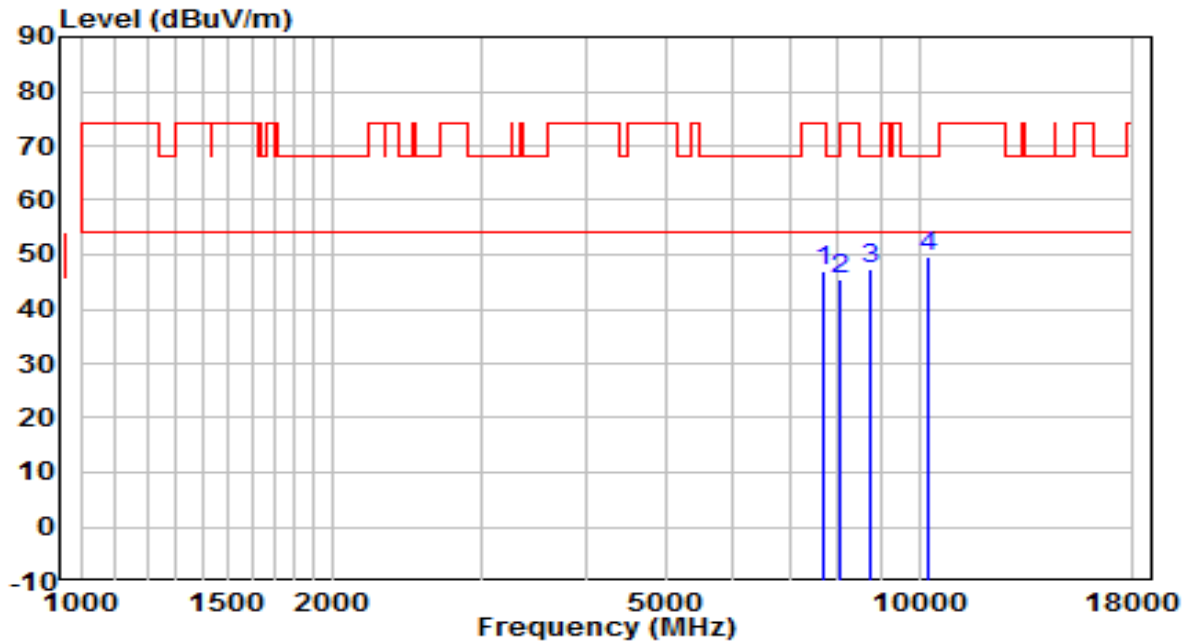


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7664.000	34.91	11.98	46.89	-27.11	74.00	Peak
2	8063.500	32.82	12.52	45.34	-28.66	74.00	Peak
3	8769.000	34.35	13.11	47.47	-20.73	68.20	Peak
4	* 10265.000	33.21	16.27	49.48	-18.72	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	120V/60Hz

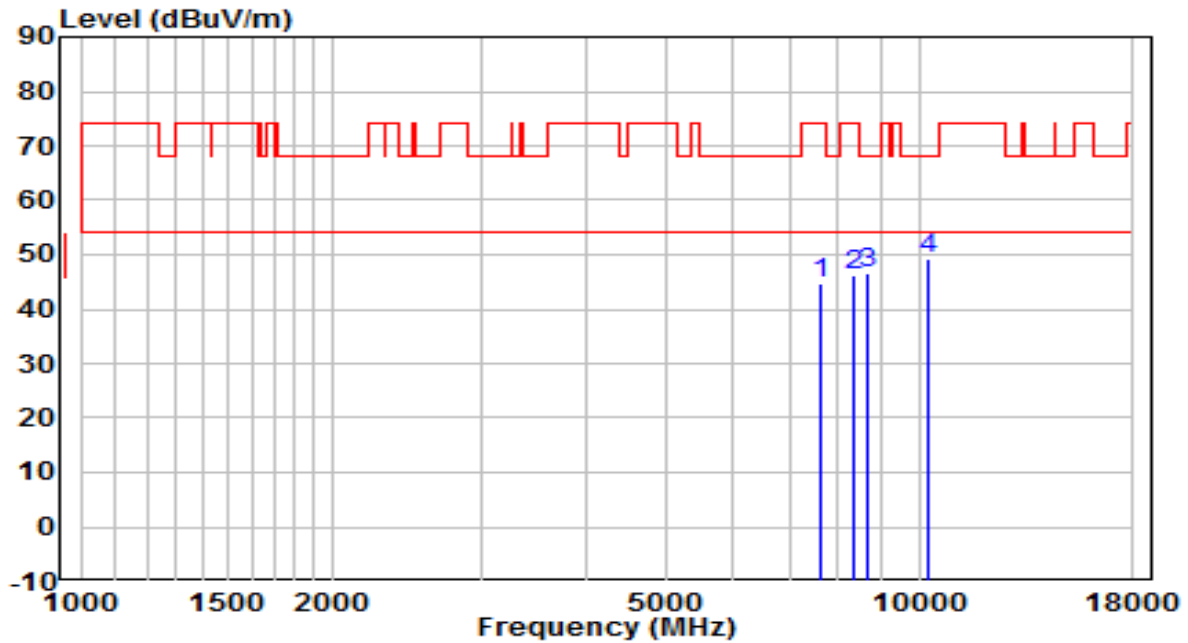


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7647.000	32.75	11.95	44.70	-29.30	74.00	Peak
2	8378.000	33.70	12.47	46.17	-27.83	74.00	Peak
3	8667.000	33.63	12.86	46.49	-21.71	68.20	Peak
4	* 10282.000	32.85	16.32	49.17	-19.03	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5785MHz	Test Voltage	120V/60Hz

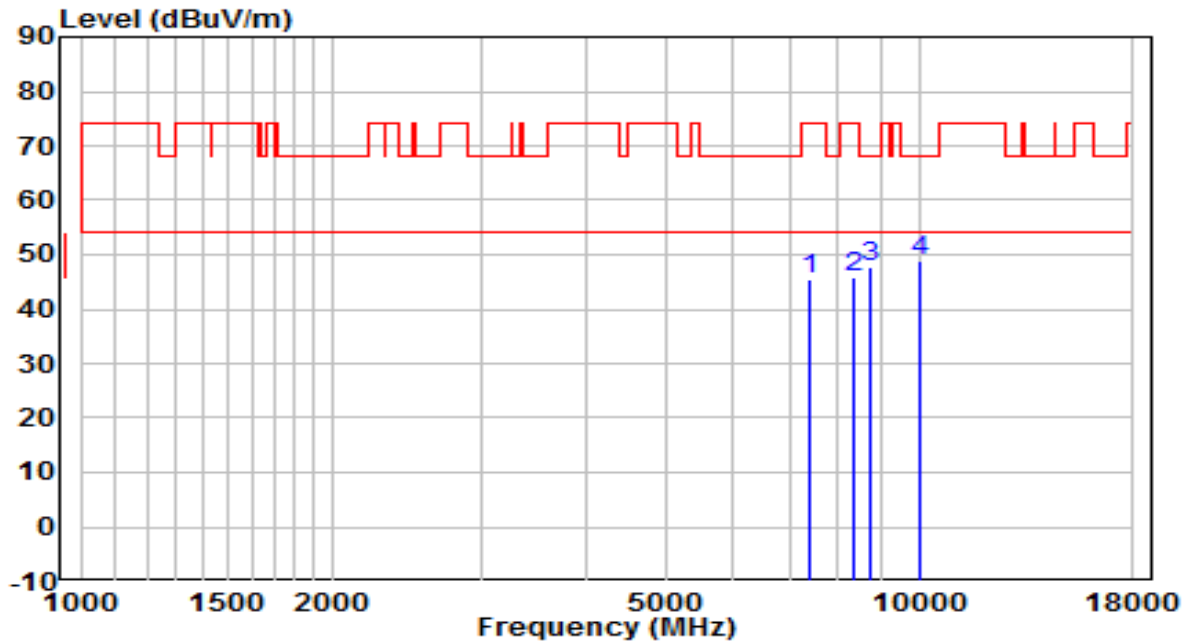


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7383.500	34.01	11.39	45.40	-28.60	74.00	Peak
2	8335.500	33.44	12.48	45.92	-28.08	74.00	Peak
3	8760.500	34.66	13.09	47.76	-20.44	68.20	Peak
4	* 10044.000	33.53	15.51	49.05	-19.15	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5785MHz	Test Voltage	120V/60Hz

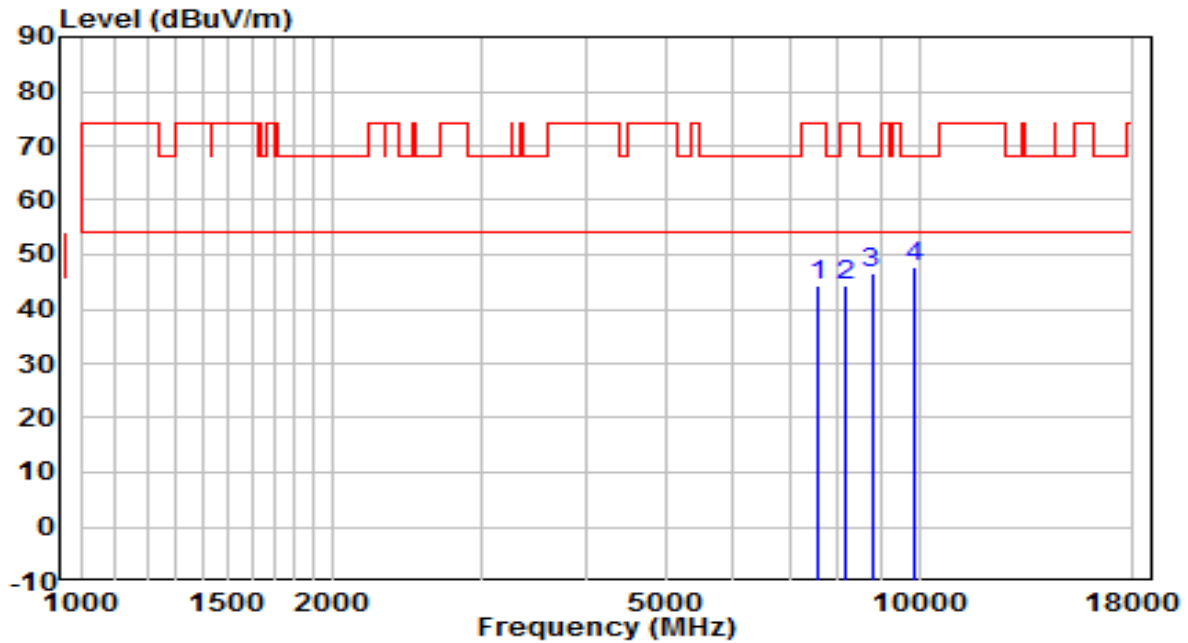


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7596.000	32.58	11.87	44.45	-29.55	74.00	Peak
2	8191.000	32.02	12.50	44.52	-29.48	74.00	Peak
3	8777.500	33.48	13.13	46.61	-21.59	68.20	Peak
4	* 9882.500	32.53	15.14	47.67	-20.53	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	120V/60Hz

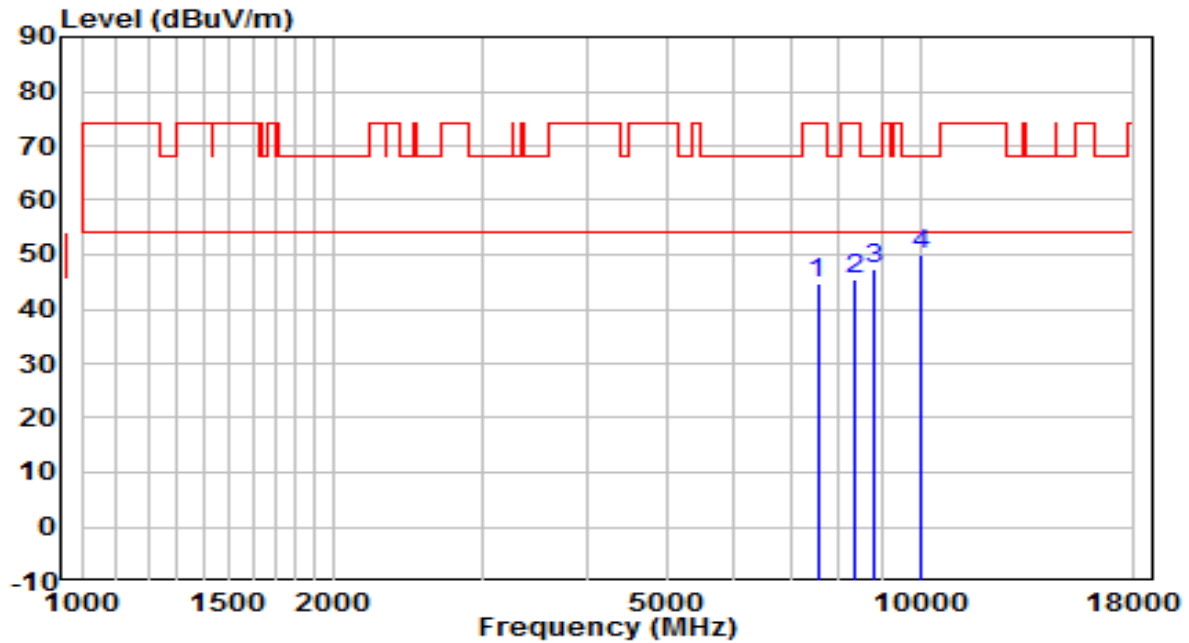


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7545.000	32.85	11.79	44.64	-29.36	74.00	Peak
2	8335.500	32.82	12.48	45.30	-28.70	74.00	Peak
3	8786.000	34.05	13.16	47.21	-20.99	68.20	Peak
4	* 10052.500	34.35	15.54	49.89	-18.31	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	120V/60Hz

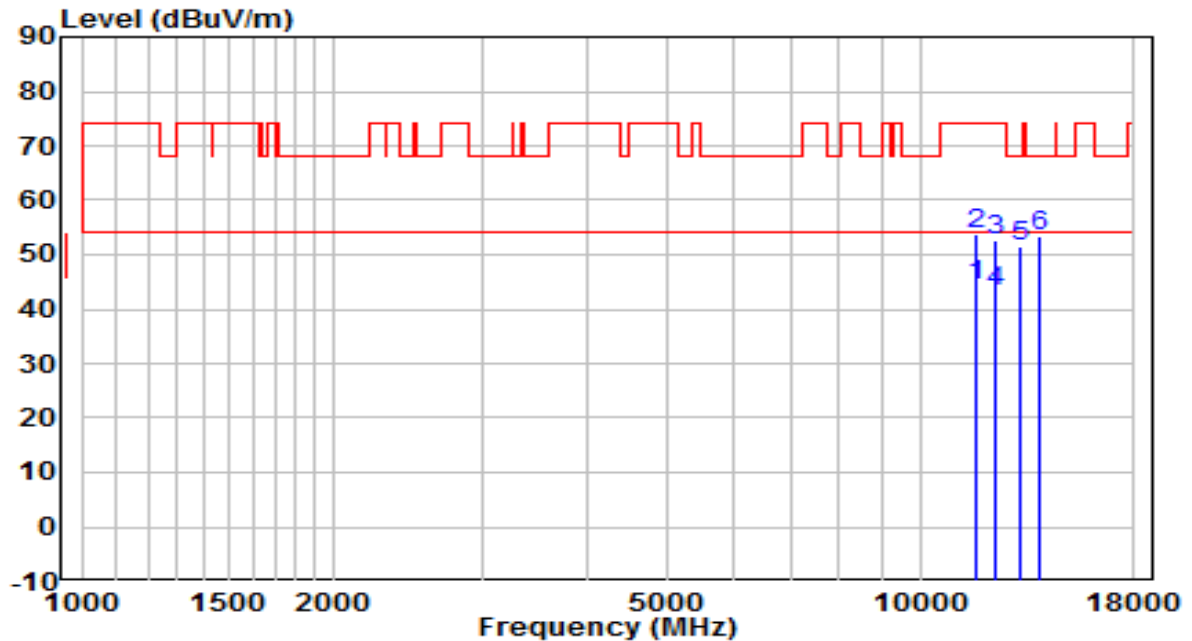


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 11650.000	25.95	18.26	44.21	-9.79	54.00	Average
2	11650.500	35.60	18.26	53.86	-20.14	74.00	Peak
3	12262.500	34.73	17.86	52.59	-21.41	74.00	Peak
4	12262.500	25.16	17.86	43.02	-10.98	54.00	Average
5	13129.500	31.81	19.62	51.43	-16.77	68.20	Peak
6	13886.000	31.93	21.30	53.23	-14.97	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120V/60Hz

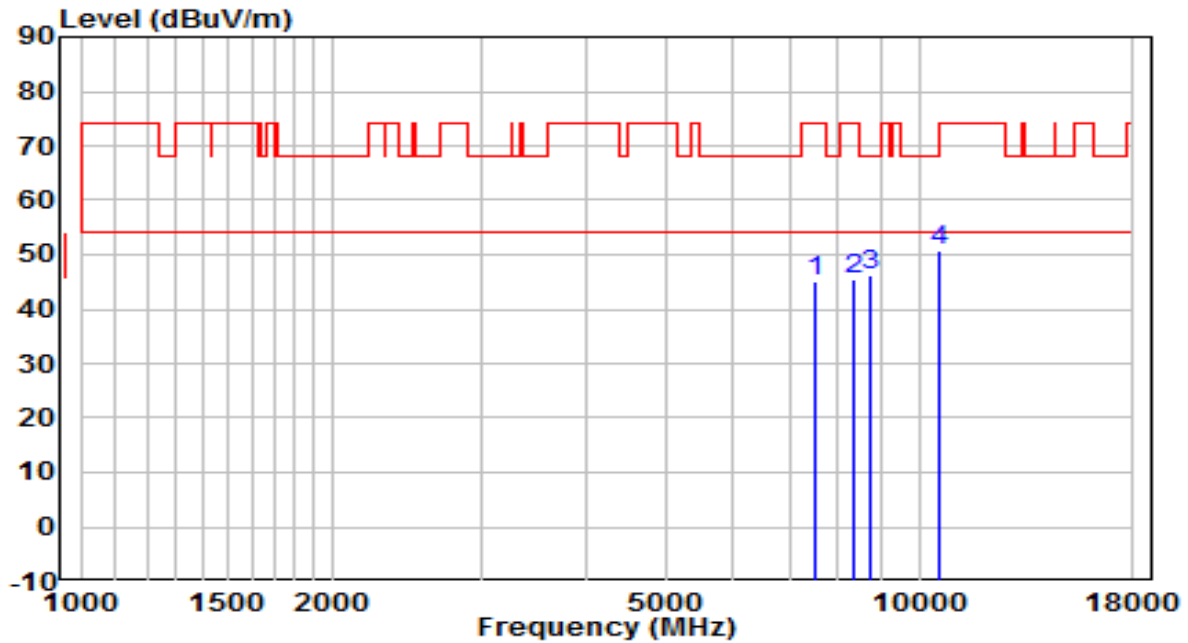


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7519.500	33.41	11.75	45.16	-28.84	74.00	Peak
2	8335.500	32.83	12.48	45.31	-28.69	74.00	Peak
3	8743.500	33.14	13.05	46.20	-22.00	68.20	Peak
4	* 10579.500	33.46	17.18	50.64	-17.56	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120V/60Hz

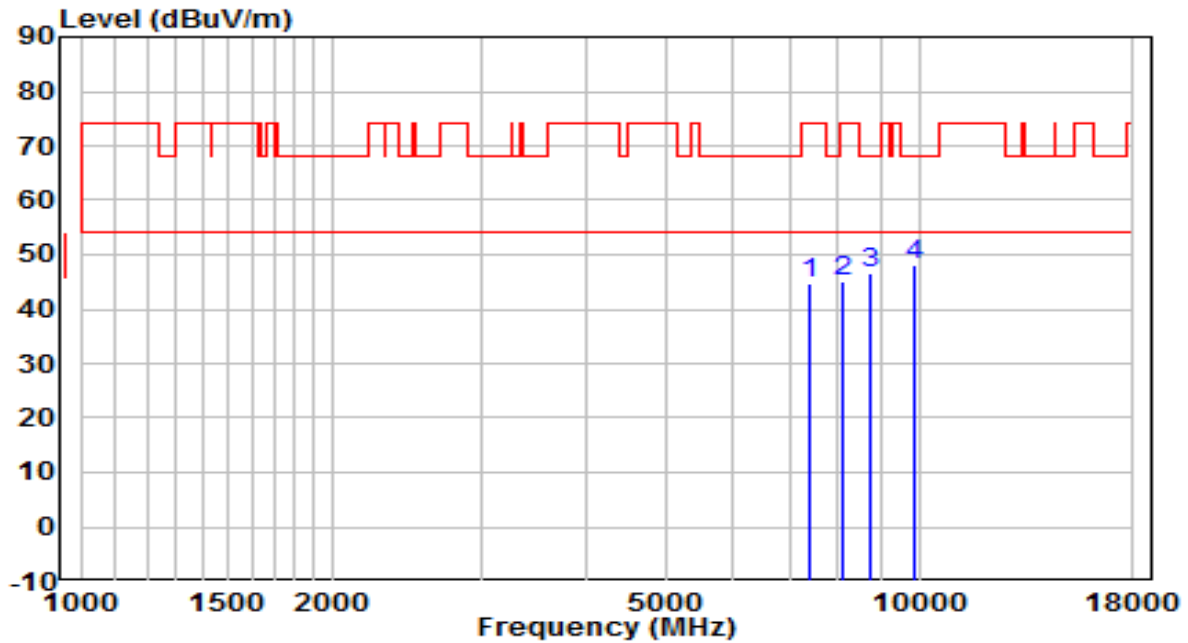


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7383.500	33.43	11.39	44.82	-29.18	74.00	Peak
2	8106.000	32.76	12.51	45.28	-28.72	74.00	Peak
3	8752.000	33.41	13.07	46.48	-21.72	68.20	Peak
4	* 9865.500	32.91	15.11	48.02	-20.18	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5230MHz	Test Voltage	120V/60Hz

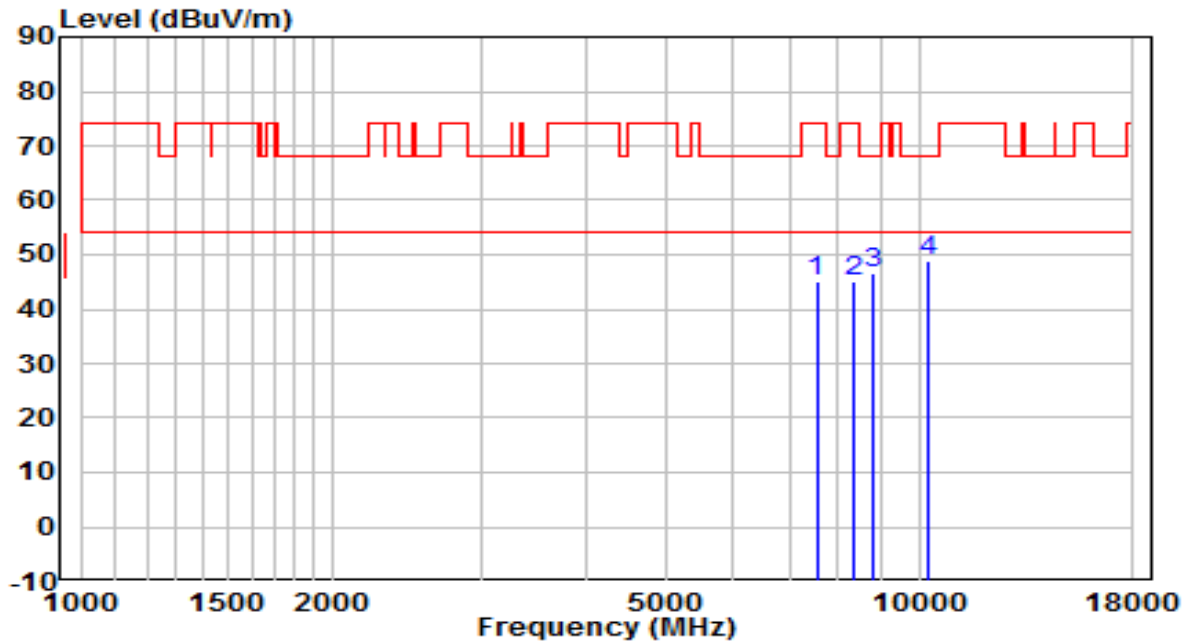


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7545.000	33.19	11.79	44.98	-29.02	74.00	Peak
2	8369.500	32.78	12.47	45.26	-28.74	74.00	Peak
3	8786.000	33.48	13.16	46.64	-21.56	68.20	Peak
4	* 10239.500	32.76	16.18	48.93	-19.27	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5230MHz	Test Voltage	120V/60Hz

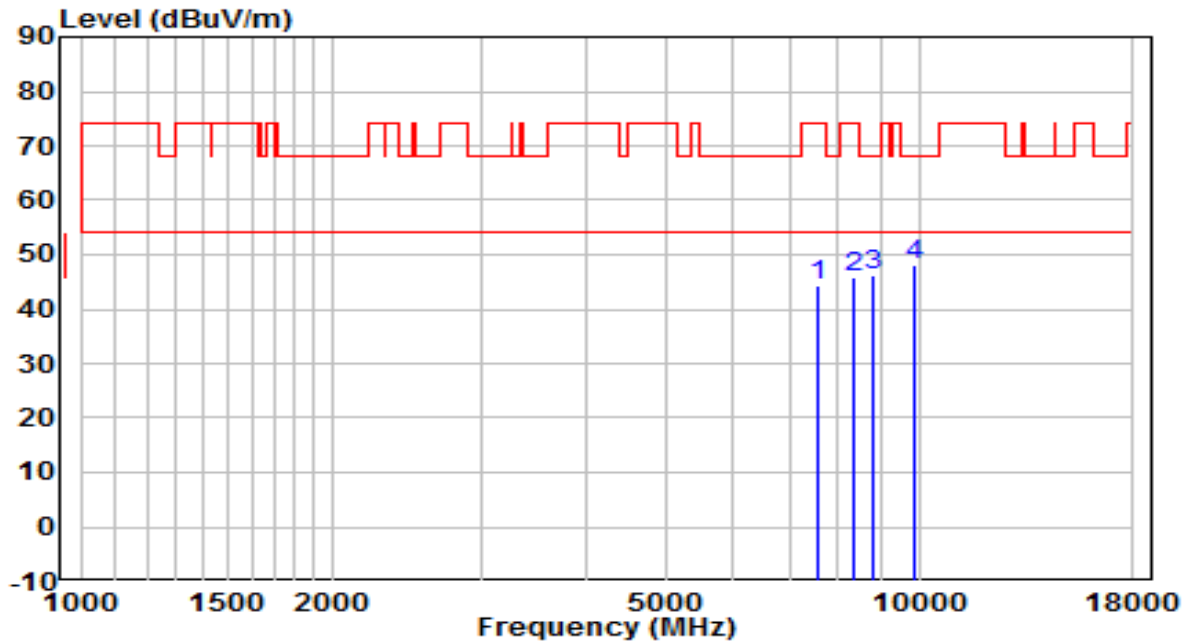


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7553.500	32.68	11.80	44.49	-29.51	74.00	Peak
2	8386.500	33.34	12.47	45.81	-28.19	74.00	Peak
3	8828.500	32.86	13.26	46.12	-22.08	68.20	Peak
4	* 9865.500	33.07	15.11	48.17	-20.03	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5270MHz	Test Voltage	120V/60Hz

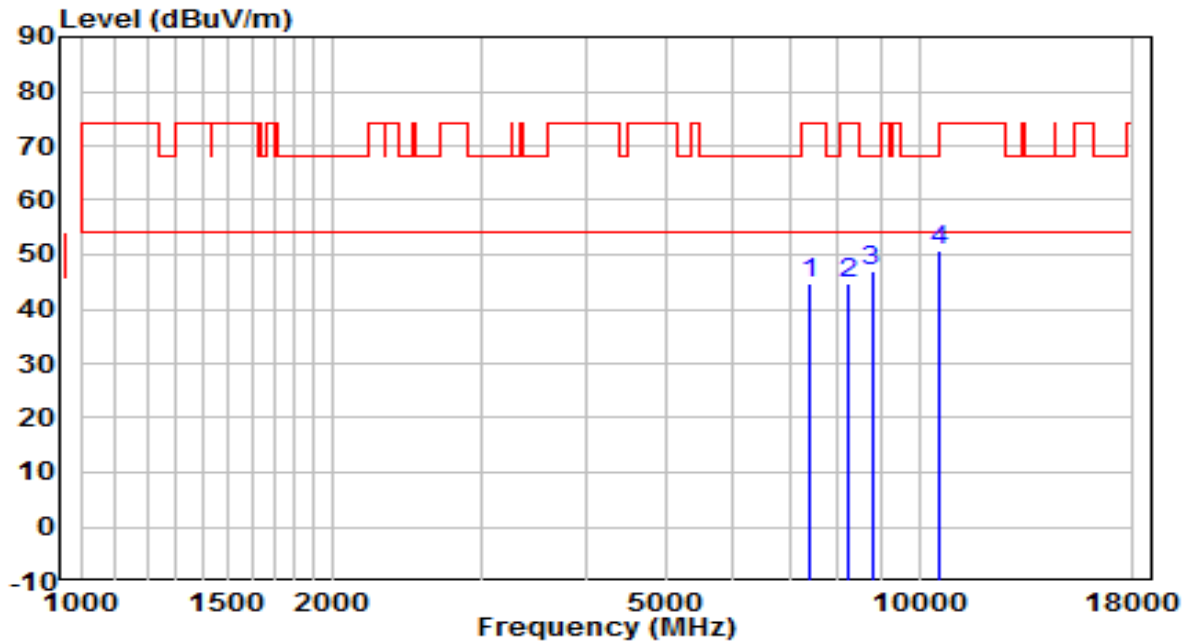


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7409.000	33.15	11.46	44.61	-29.39	74.00	Peak
2	8225.000	32.41	12.50	44.90	-29.10	74.00	Peak
3	8777.500	33.93	13.13	47.07	-21.13	68.20	Peak
4	* 10537.000	33.72	17.12	50.84	-17.36	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5270MHz	Test Voltage	120V/60Hz

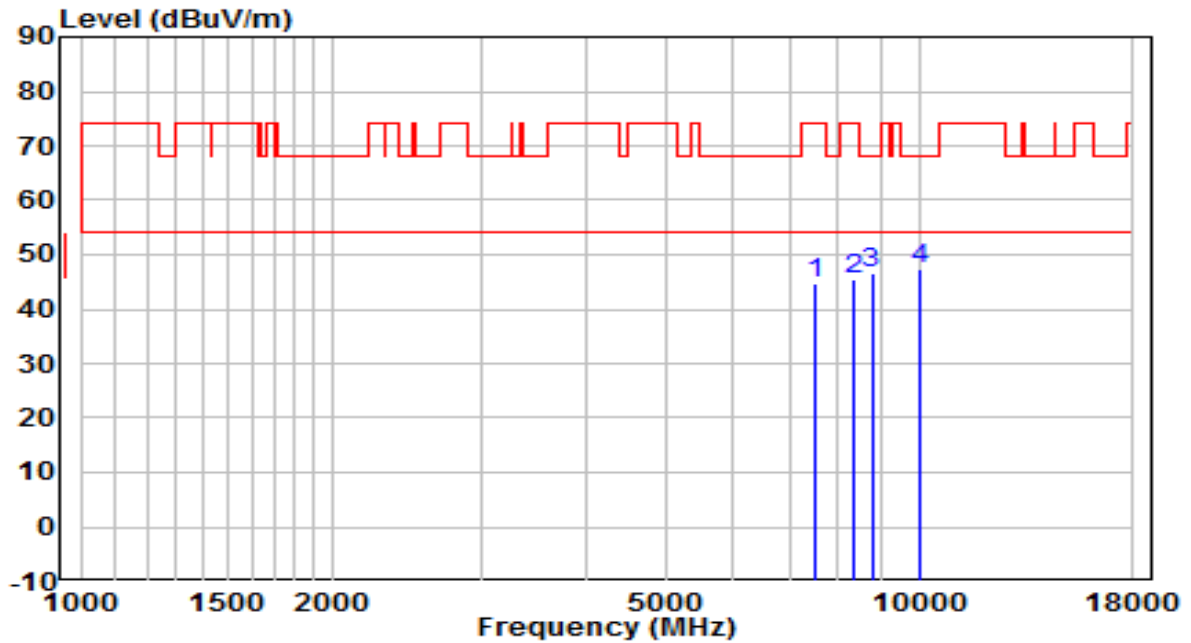


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7494.000	32.98	11.70	44.68	-29.32	74.00	Peak
2	8327.000	32.87	12.48	45.35	-28.65	74.00	Peak
3	8777.500	33.49	13.13	46.63	-21.57	68.20	Peak
4	* 10035.500	31.92	15.48	47.40	-20.80	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	120V/60Hz

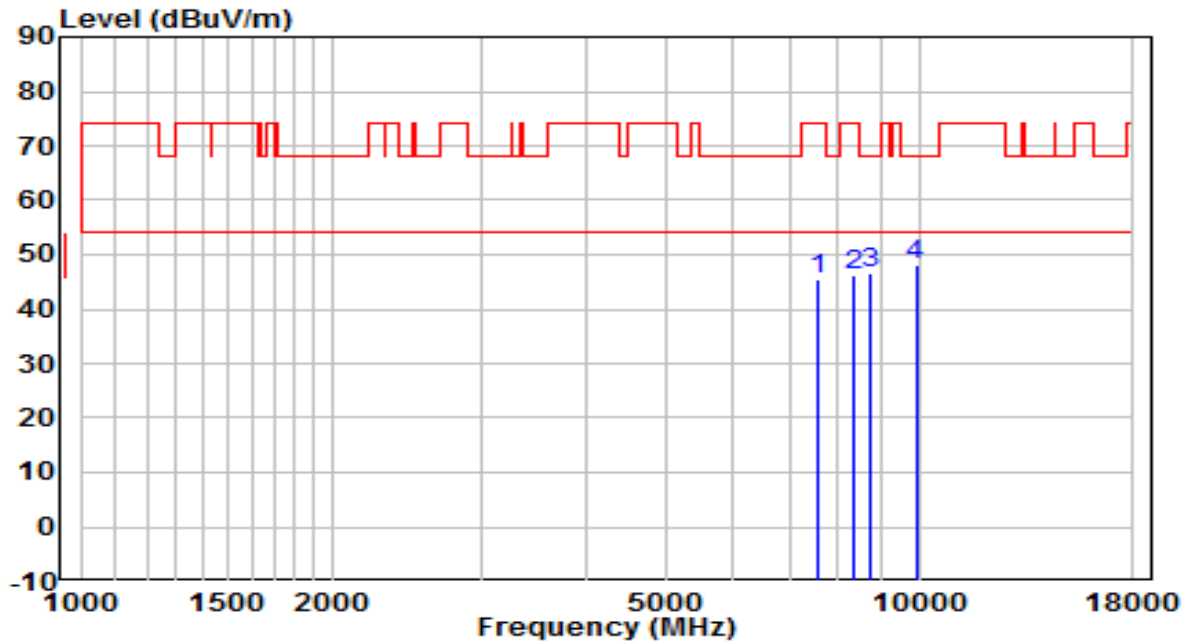


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7596.000	33.78	11.87	45.65	-28.35	74.00	Peak
2	8344.000	33.92	12.48	46.40	-27.60	74.00	Peak
3	8752.000	33.71	13.07	46.78	-21.42	68.20	Peak
4	* 9908.000	33.09	15.19	48.28	-19.92	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	120V/60Hz

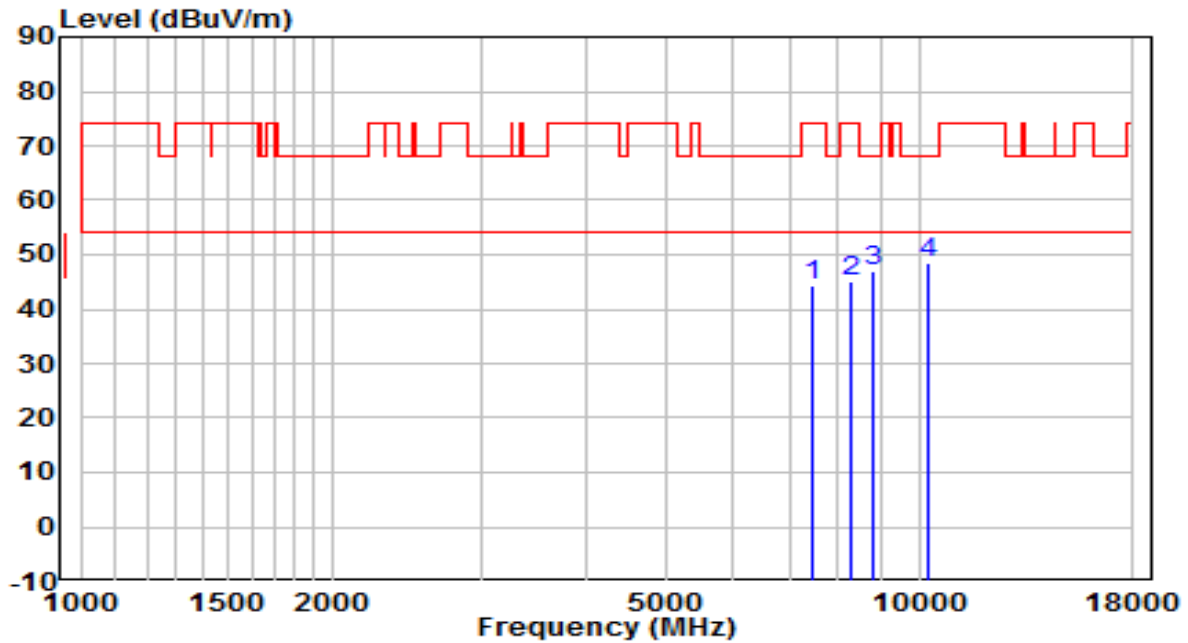


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7485.500	32.81	11.67	44.48	-29.52	74.00	Peak
2	8310.000	32.62	12.48	45.11	-28.89	74.00	Peak
3	8794.500	33.72	13.18	46.89	-21.31	68.20	Peak
4	* 10239.500	32.16	16.18	48.34	-19.86	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	120V/60Hz

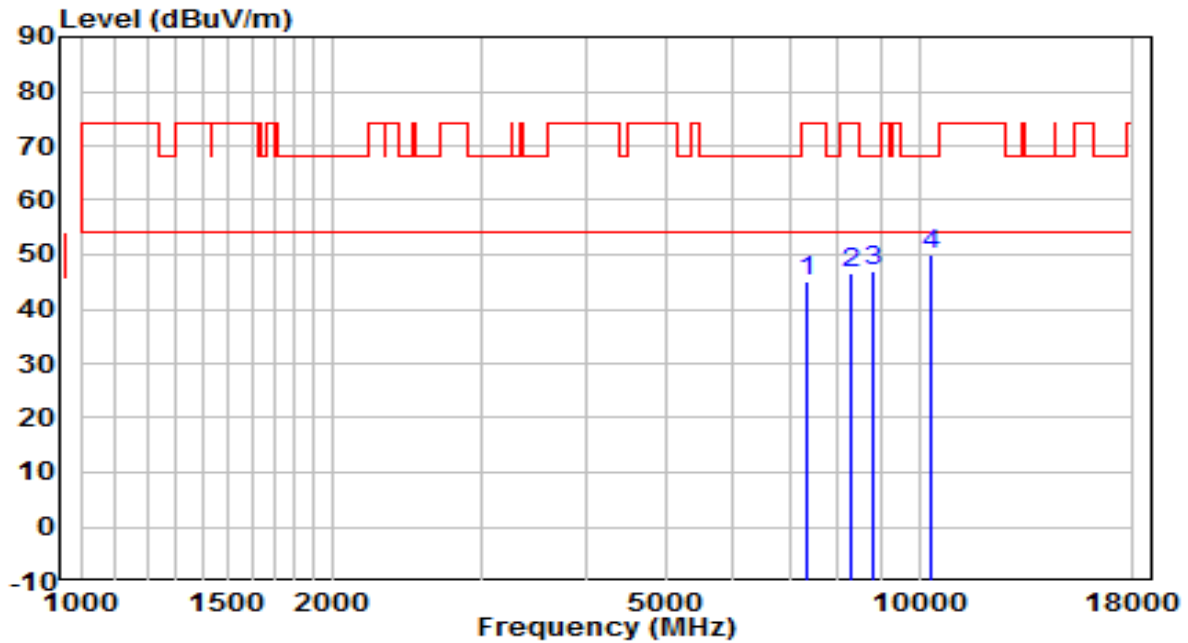


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7349.500	33.73	11.29	45.02	-28.98	74.00	Peak
2	8318.500	34.05	12.48	46.53	-27.47	74.00	Peak
3	8786.000	34.01	13.16	47.16	-21.04	68.20	Peak
4	* 10324.500	33.36	16.47	49.83	-18.37	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	120V/60Hz

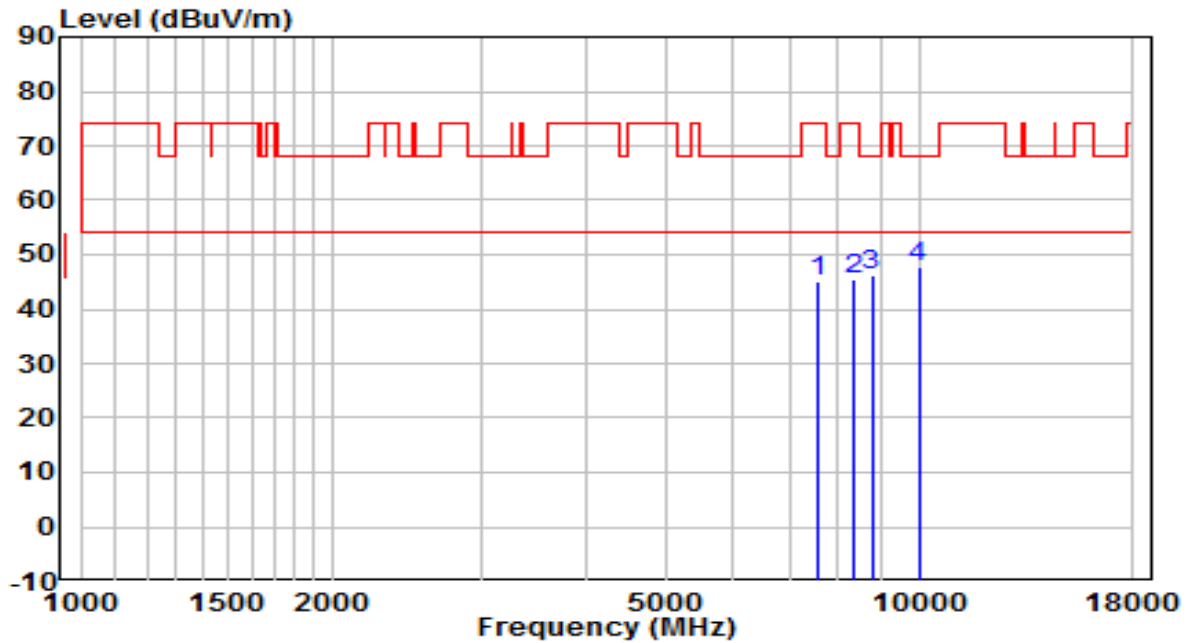


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7562.000	33.30	11.82	45.11	-28.89	74.00	Peak
2	8352.500	33.08	12.48	45.56	-28.44	74.00	Peak
3	8777.500	33.08	13.13	46.21	-21.99	68.20	Peak
4	* 9984.500	32.40	15.33	47.73	-20.47	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5550MHz	Test Voltage	120V/60Hz

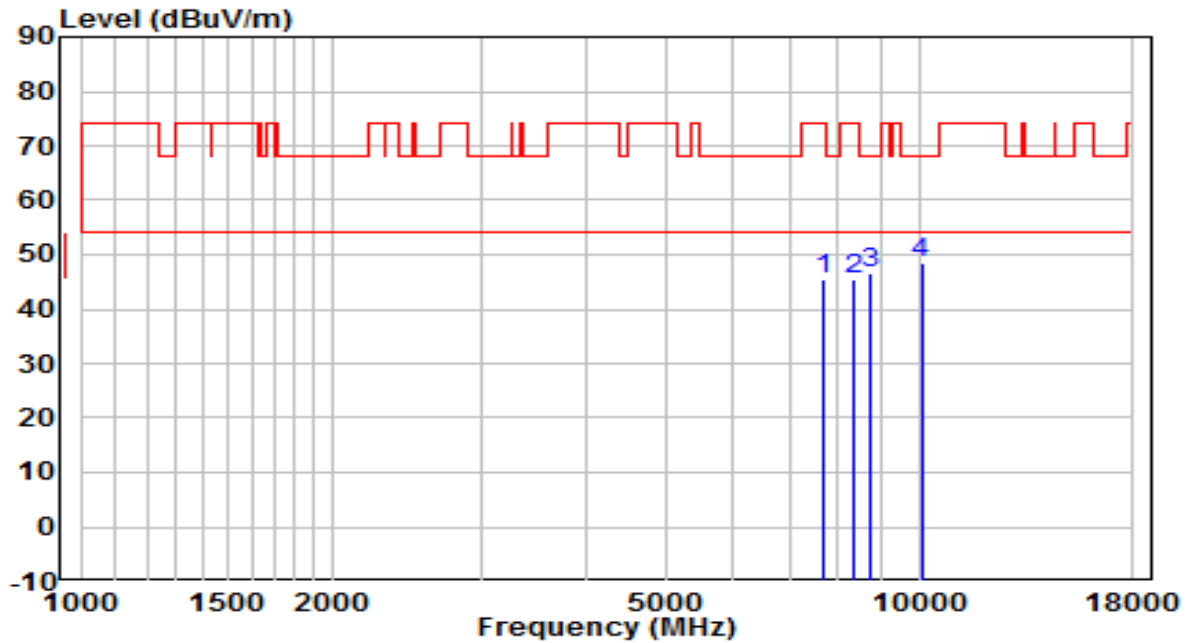


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7689.500	33.55	12.02	45.58	-28.42	74.00	Peak
2	8386.500	32.91	12.47	45.38	-28.62	74.00	Peak
3	8735.000	33.44	13.03	46.47	-21.73	68.20	Peak
4	* 10061.000	32.77	15.57	48.34	-19.86	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5550MHz	Test Voltage	120V/60Hz

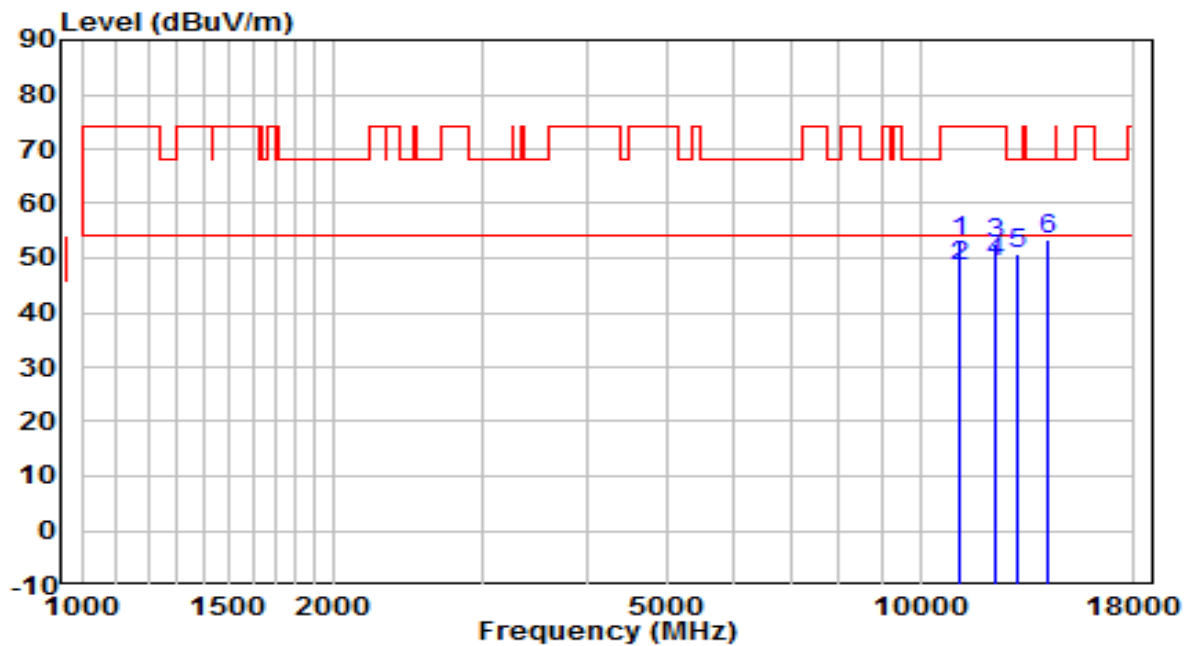


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	11106.500	35.22	17.92	53.14	-20.86	74.00	Peak
2	11106.500	30.53	17.92	48.45	-5.55	54.00	Average
3	12288.000	34.93	17.87	52.79	-21.21	74.00	Peak
4	* 12288.000	31.22	17.87	49.09	-4.91	54.00	Average
5	13078.500	31.39	19.49	50.88	-17.32	68.20	Peak
6	14217.500	32.04	21.45	53.49	-14.71	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	120V/60Hz

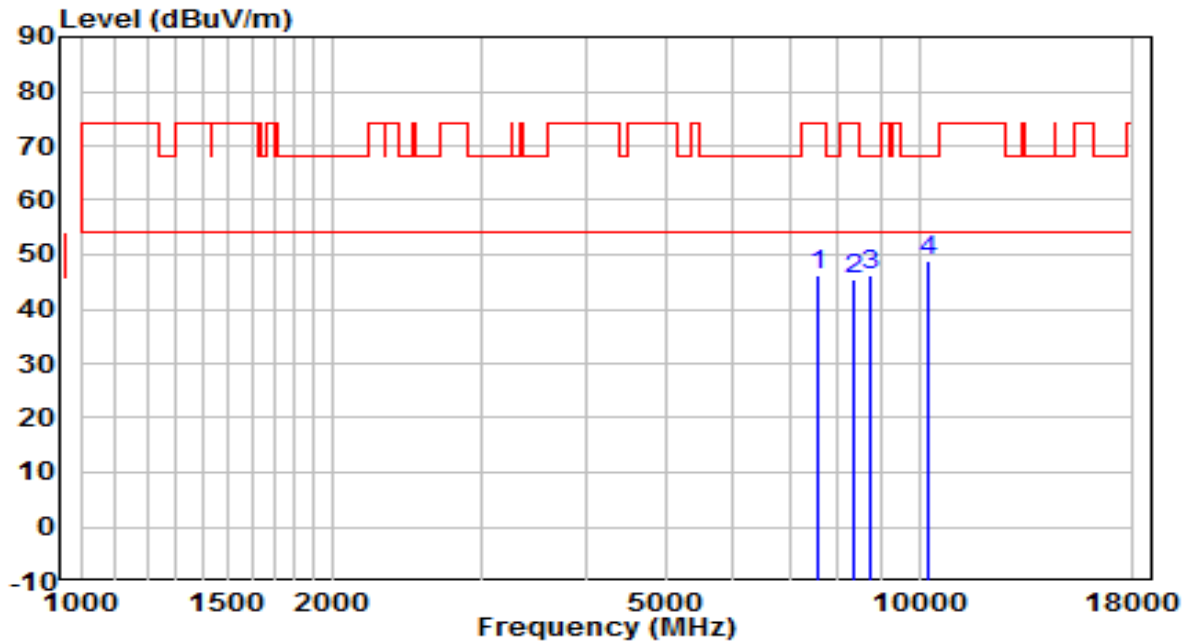


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7562.000	34.58	11.82	46.40	-27.60	74.00	Peak
2	8352.500	32.92	12.48	45.40	-28.60	74.00	Peak
3	8760.500	33.23	13.09	46.33	-21.87	68.20	Peak
4	* 10265.000	32.67	16.27	48.94	-19.26	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	120V/60Hz

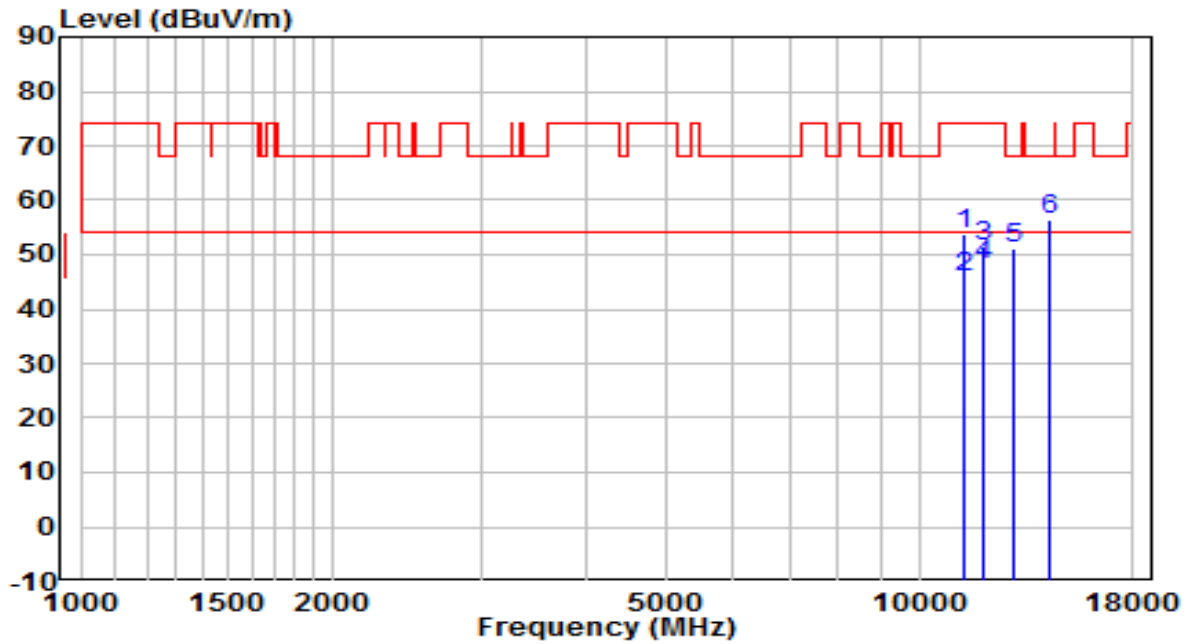


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	11336.000	35.68	18.23	53.91	-20.09	74.00	Peak
2	11336.000	27.45	18.23	45.69	-8.31	54.00	Average
3	11939.500	33.61	17.90	51.51	-22.49	74.00	Peak
4	* 11939.500	30.16	17.90	48.06	-5.94	54.00	Average
5	12993.500	31.95	19.27	51.22	-16.98	68.20	Peak
6	14353.500	35.18	21.40	56.58	-11.62	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5710MHz	Test Voltage	120V/60Hz

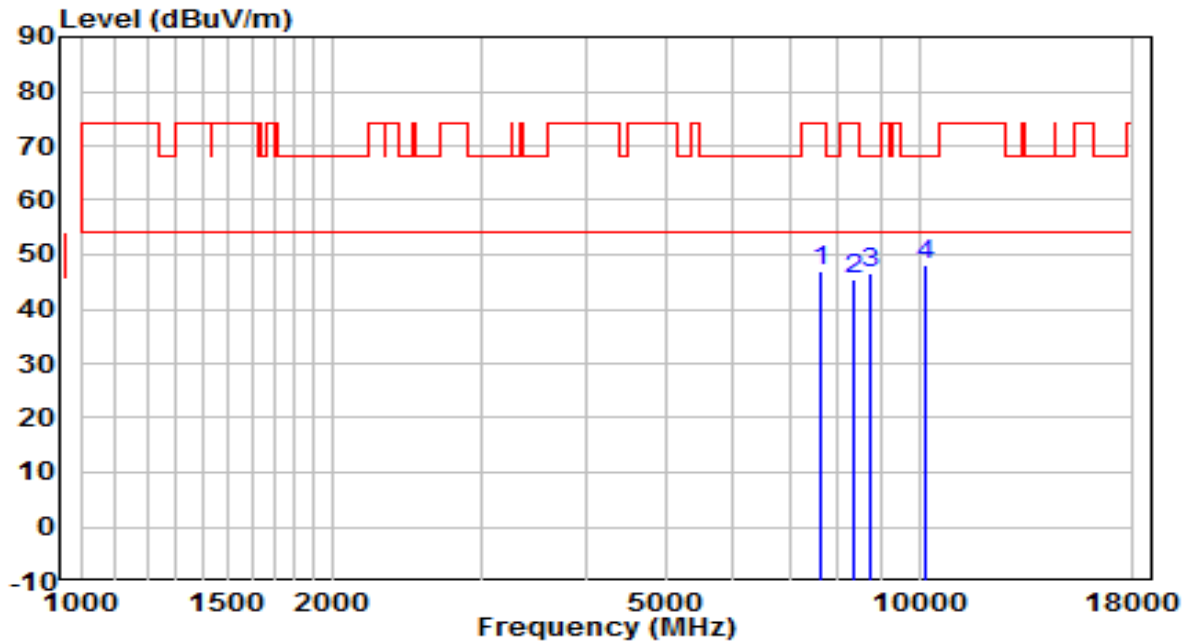


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7613.000	35.08	11.90	46.98	-27.02	74.00	Peak
2	8327.000	33.11	12.48	45.59	-28.41	74.00	Peak
3	8743.500	33.47	13.05	46.52	-21.68	68.20	Peak
4	* 10205.500	32.23	16.06	48.29	-19.91	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5710MHz	Test Voltage	120V/60Hz

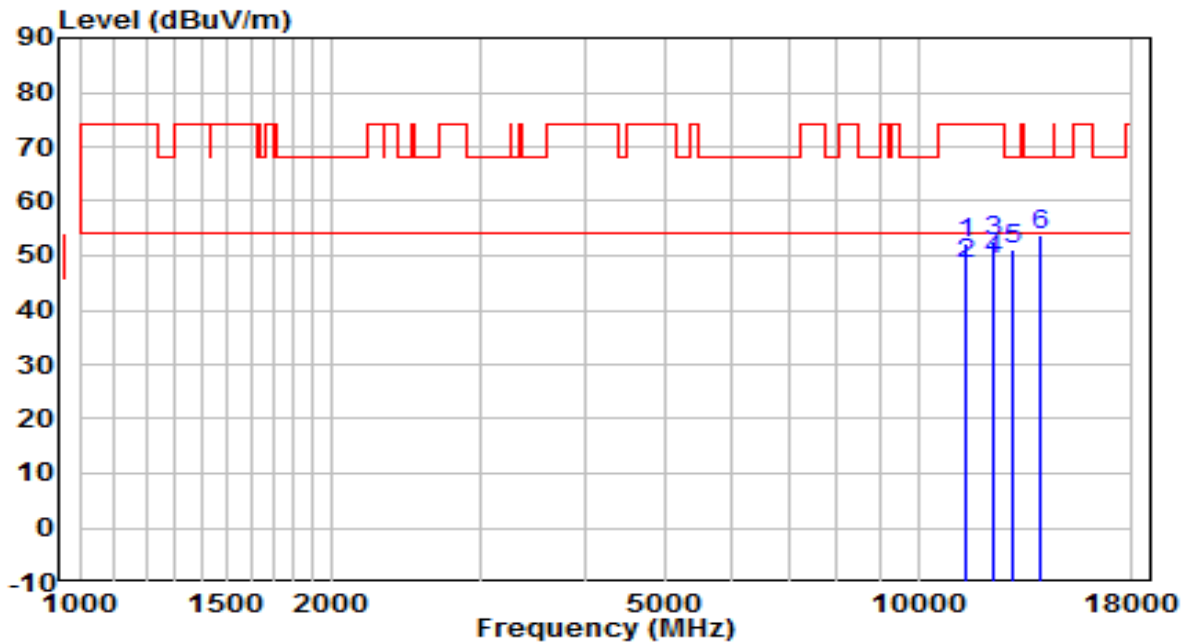


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	11421.000	33.74	18.34	52.08	-21.92	74.00	Peak
2	11421.000	30.16	18.34	48.50	-5.50	54.00	Average
3	12262.500	34.63	17.86	52.49	-21.51	74.00	Peak
4 *	12262.500	31.51	17.86	49.37	-4.63	54.00	Average
5	12951.000	32.00	19.15	51.15	-17.05	68.20	Peak
6	13979.500	32.23	21.48	53.71	-14.49	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	120V/60Hz

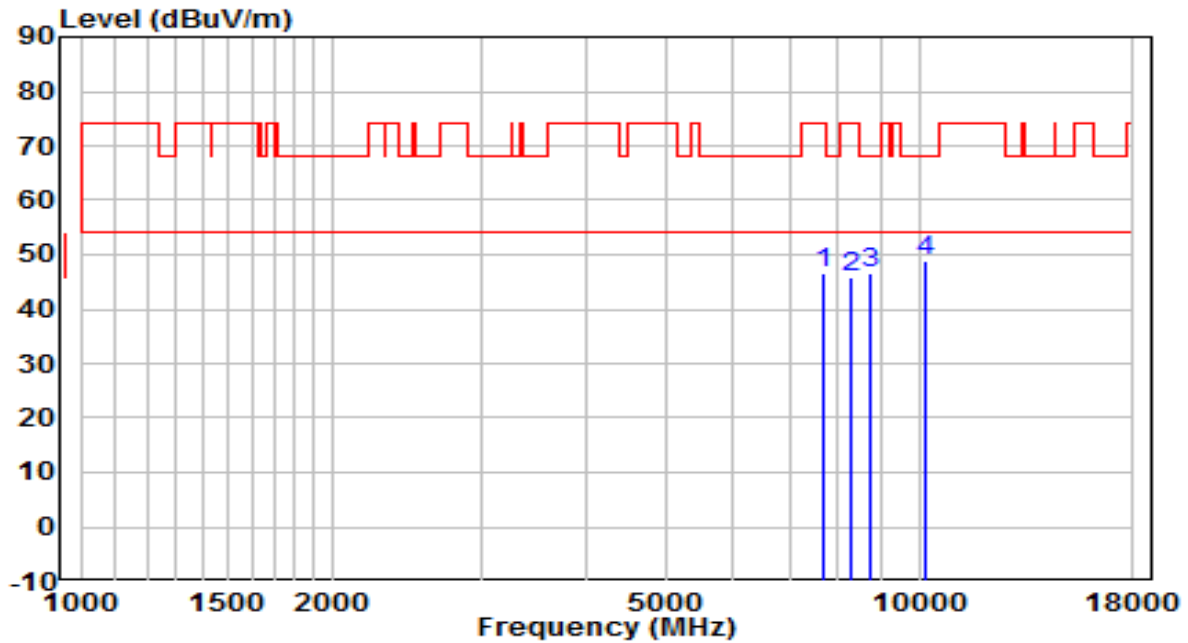


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7672.500	34.78	12.00	46.78	-27.22	74.00	Peak
2	8284.500	33.19	12.49	45.68	-28.32	74.00	Peak
3	8769.000	33.60	13.11	46.72	-21.48	68.20	Peak
4	* 10188.500	32.72	16.00	48.72	-19.48	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	120V/60Hz

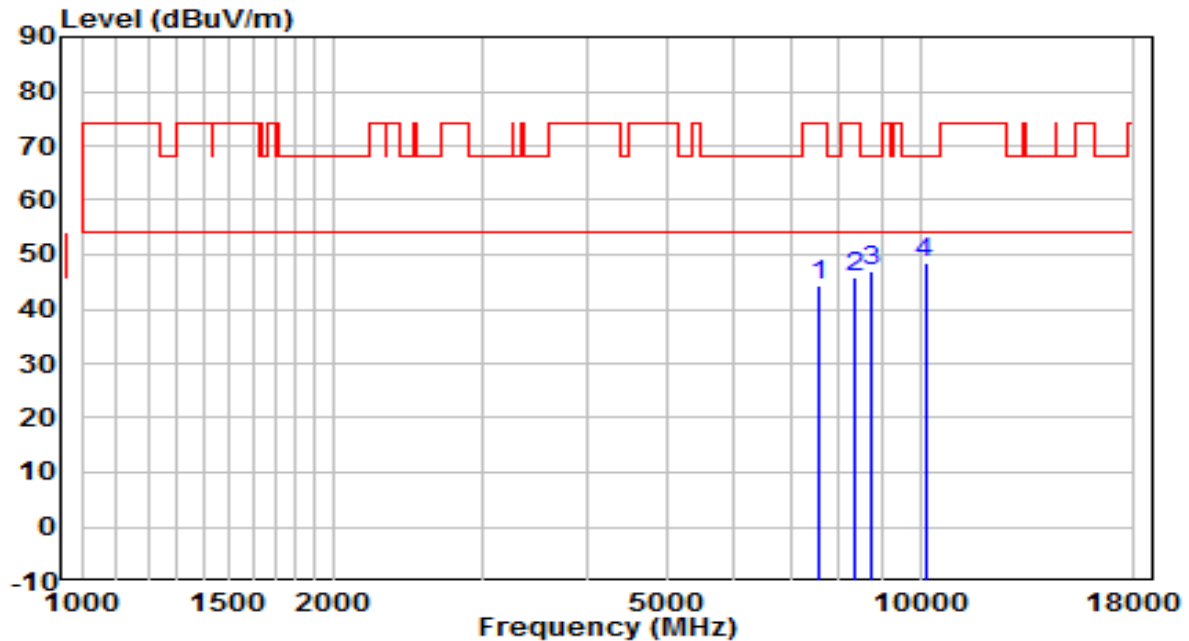


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7553.500	32.62	11.80	44.42	-29.58	74.00	Peak
2	8327.000	33.20	12.48	45.68	-28.32	74.00	Peak
3	8760.500	33.78	13.09	46.87	-21.33	68.20	Peak
4	* 10137.500	32.49	15.83	48.32	-19.88	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	120V/60Hz

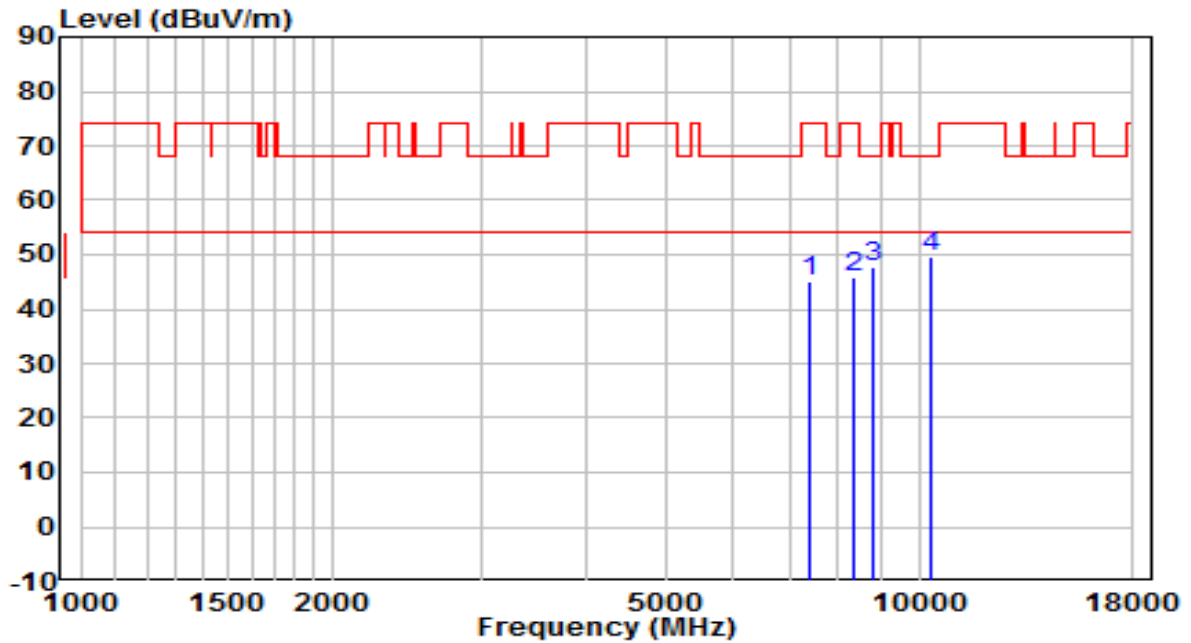


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7392.000	33.67	11.41	45.08	-28.92	74.00	Peak
2	8352.500	33.24	12.48	45.72	-28.28	74.00	Peak
3	8811.500	34.35	13.22	47.57	-20.63	68.20	Peak
4	* 10324.500	33.29	16.47	49.76	-18.44	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	120V/60Hz

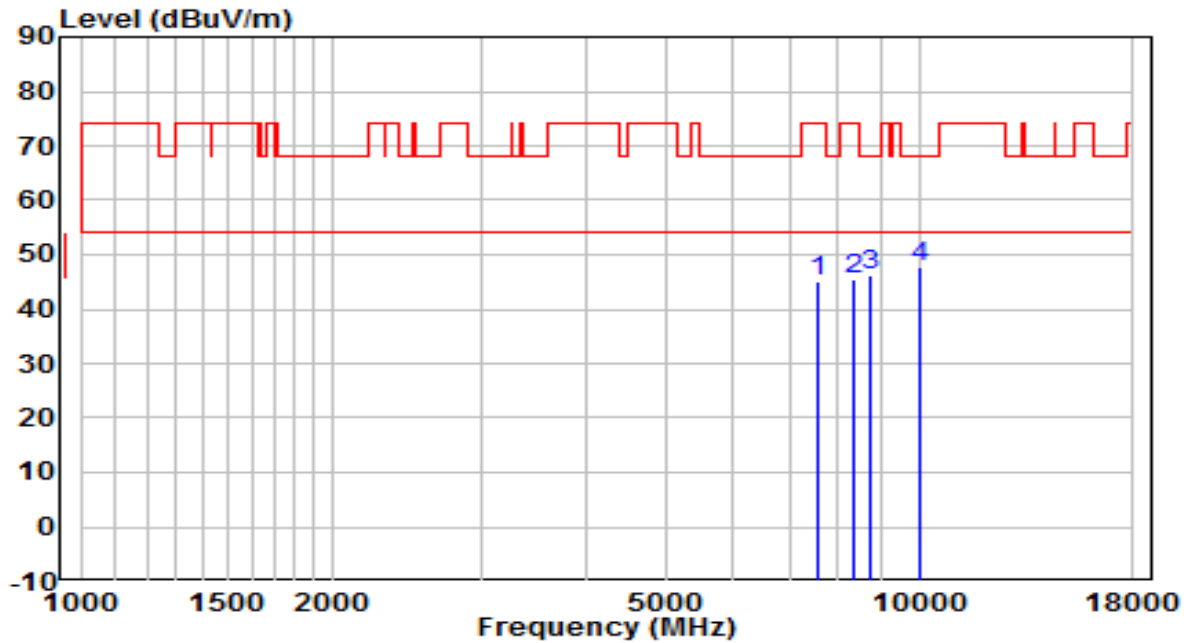


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7596.000	33.34	11.87	45.21	-28.79	74.00	Peak
2	8369.500	32.98	12.47	45.45	-28.55	74.00	Peak
3	8769.000	33.08	13.11	46.20	-22.00	68.20	Peak
4	* 10010.000	32.18	15.39	47.57	-20.63	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	120V/60Hz

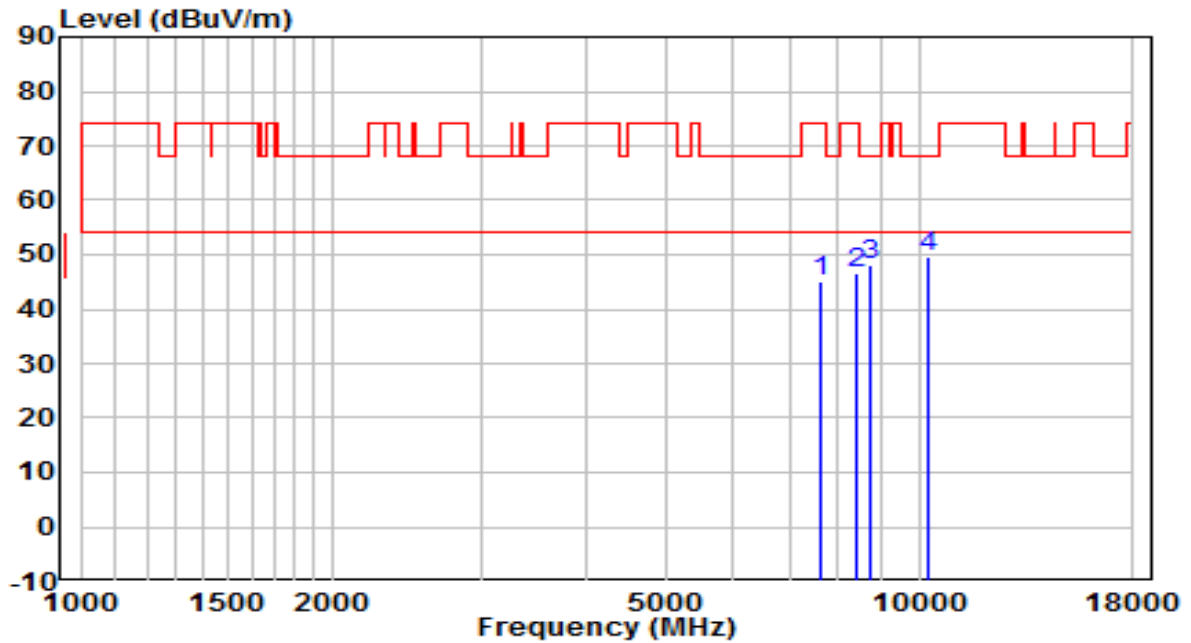


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7613.000	33.28	11.90	45.18	-28.82	74.00	Peak
2	8420.500	34.18	12.47	46.64	-27.36	74.00	Peak
3	8752.000	35.05	13.07	48.12	-20.08	68.20	Peak
4	* 10282.000	33.48	16.32	49.81	-18.39	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	120V/60Hz

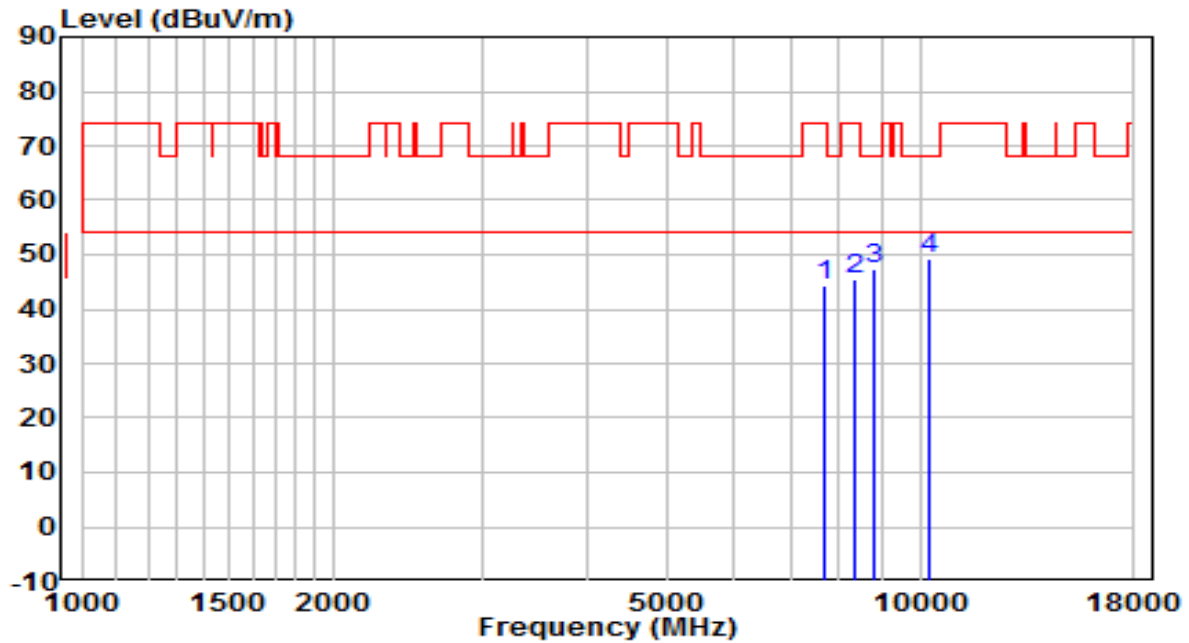


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7672.500	32.40	12.00	44.39	-29.61	74.00	Peak
2	8378.000	32.90	12.47	45.37	-28.63	74.00	Peak
3	8786.000	34.02	13.16	47.18	-21.02	68.20	Peak
4	* 10273.500	33.12	16.30	49.42	-18.78	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	120V/60Hz

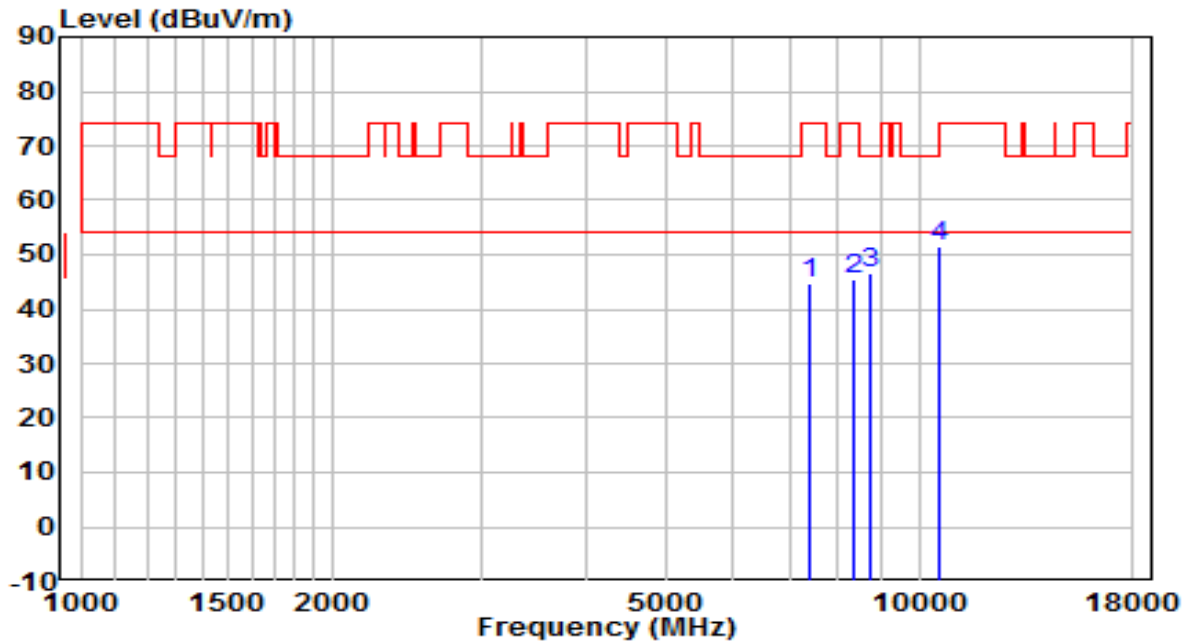


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7392.000	33.45	11.41	44.86	-29.14	74.00	Peak
2	8344.000	32.92	12.48	45.39	-28.61	74.00	Peak
3	8769.000	33.45	13.11	46.56	-21.64	68.20	Peak
4	* 10579.500	34.33	17.18	51.52	-16.68	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	120V/60Hz

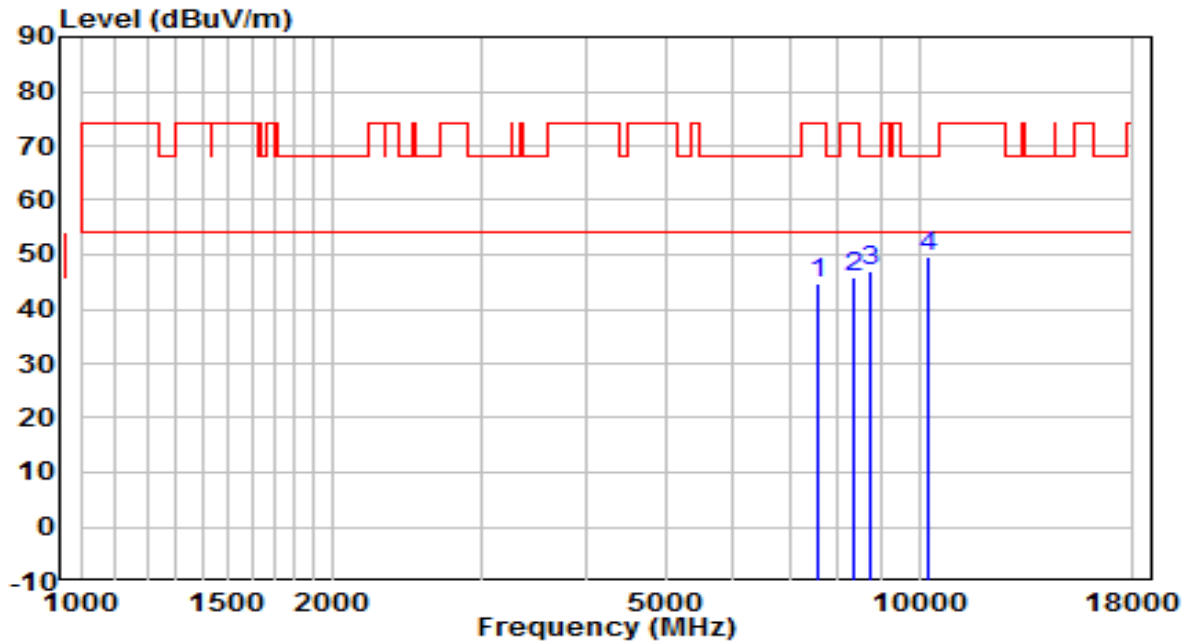


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7596.000	32.73	11.87	44.60	-29.40	74.00	Peak
2	8344.000	33.39	12.48	45.87	-28.13	74.00	Peak
3	8760.500	33.99	13.09	47.08	-21.12	68.20	Peak
4	* 10265.000	33.43	16.27	49.70	-18.50	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	120V/60Hz

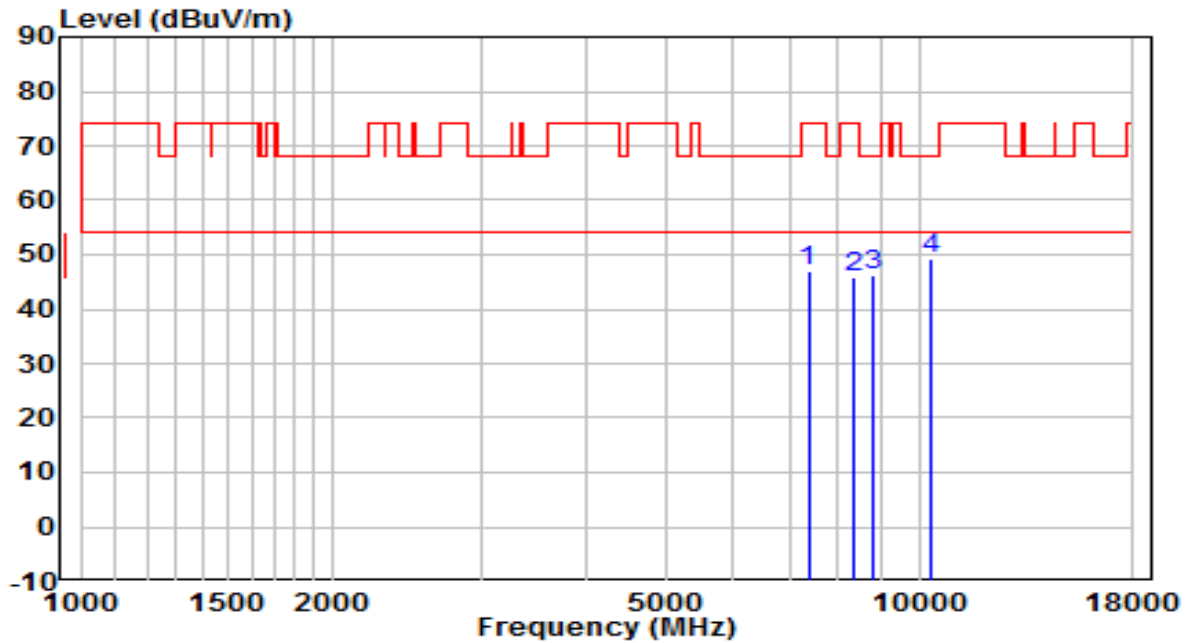


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7375.000	35.74	11.36	47.11	-26.89	74.00	Peak
2	8327.000	33.36	12.48	45.85	-28.15	74.00	Peak
3	8828.500	33.08	13.26	46.34	-21.86	68.20	Peak
4	* 10350.000	32.59	16.56	49.15	-19.05	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	120V/60Hz

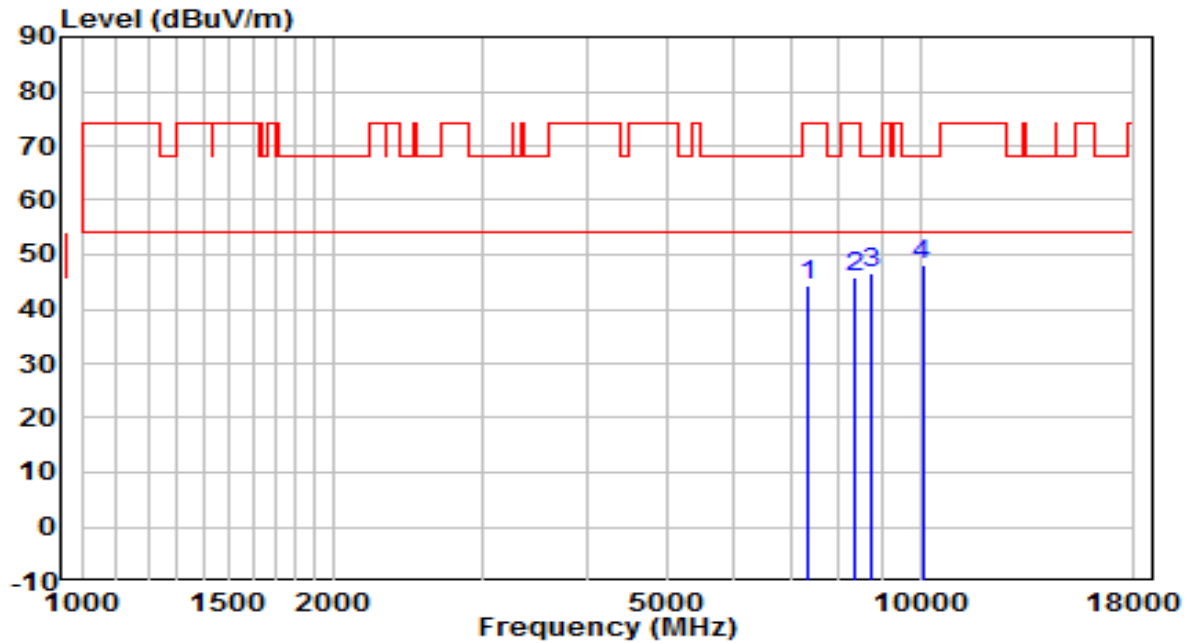


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7349.500	33.13	11.29	44.42	-29.58	74.00	Peak
2	8344.000	33.28	12.48	45.76	-28.24	74.00	Peak
3	8760.500	33.48	13.09	46.57	-21.63	68.20	Peak
4	* 10061.000	32.65	15.57	48.22	-19.98	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	120V/60Hz

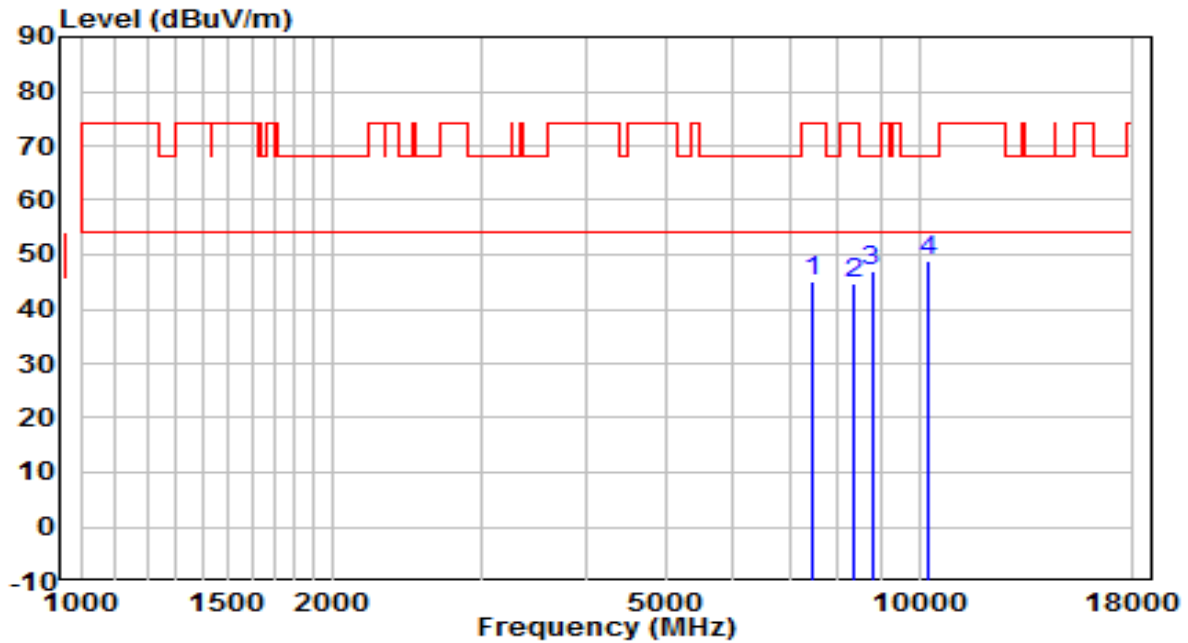


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	33.63	11.65	45.28	-28.72	74.00	Peak
2	8335.500	32.33	12.48	44.81	-29.19	74.00	Peak
3	8777.500	33.67	13.13	46.80	-21.40	68.20	Peak
4	* 10282.000	32.38	16.32	48.71	-19.49	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	120V/60Hz

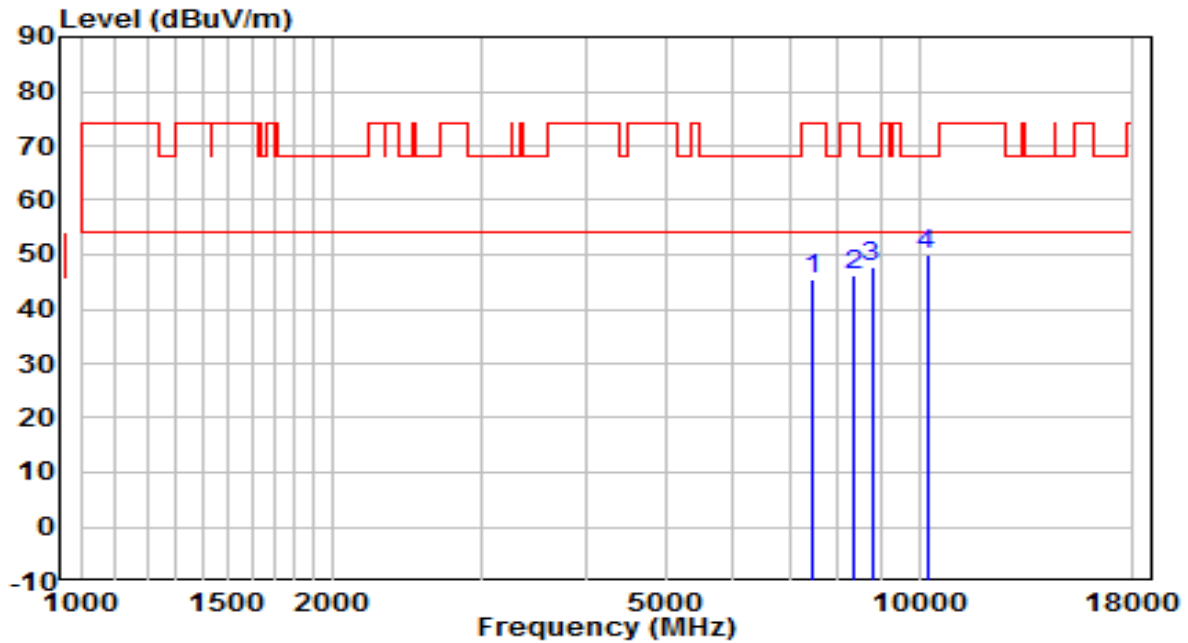


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	33.68	11.65	45.33	-28.67	74.00	Peak
2	8369.500	33.92	12.47	46.40	-27.60	74.00	Peak
3	8777.500	34.47	13.13	47.61	-20.59	68.20	Peak
4	* 10214.000	33.92	16.09	50.01	-18.19	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5690MHz	Test Voltage	120V/60Hz

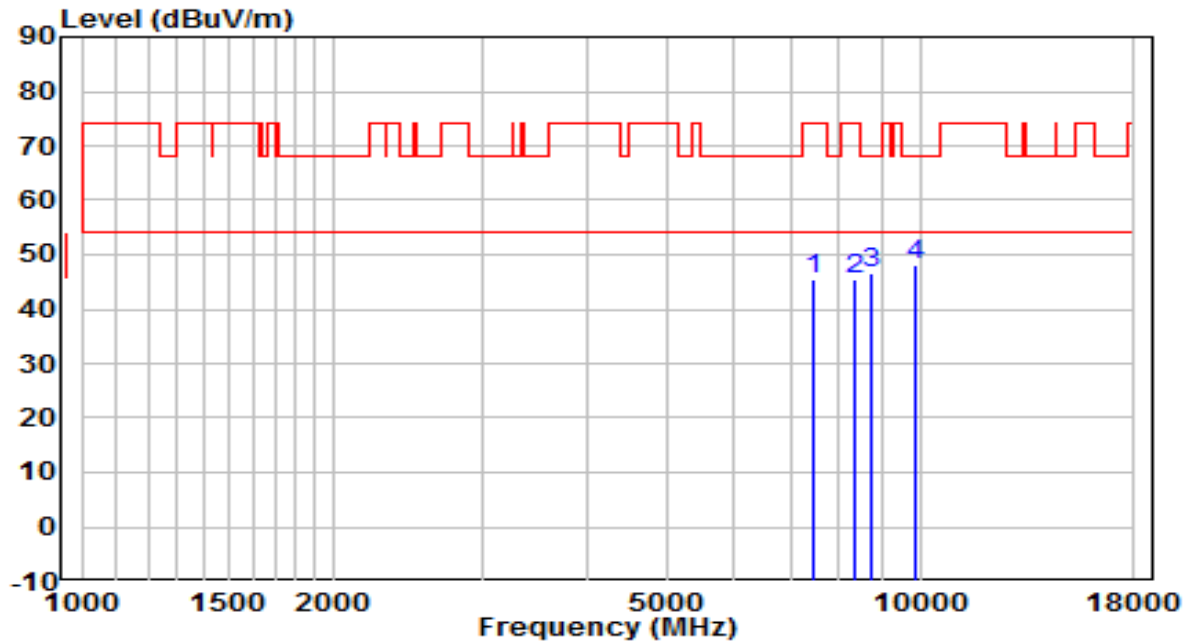


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7485.500	33.65	11.67	45.33	-28.67	74.00	Peak
2	8327.000	33.14	12.48	45.62	-28.38	74.00	Peak
3	8752.000	33.53	13.07	46.60	-21.60	68.20	Peak
4	* 9882.500	33.08	15.14	48.22	-19.98	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5690MHz	Test Voltage	120V/60Hz

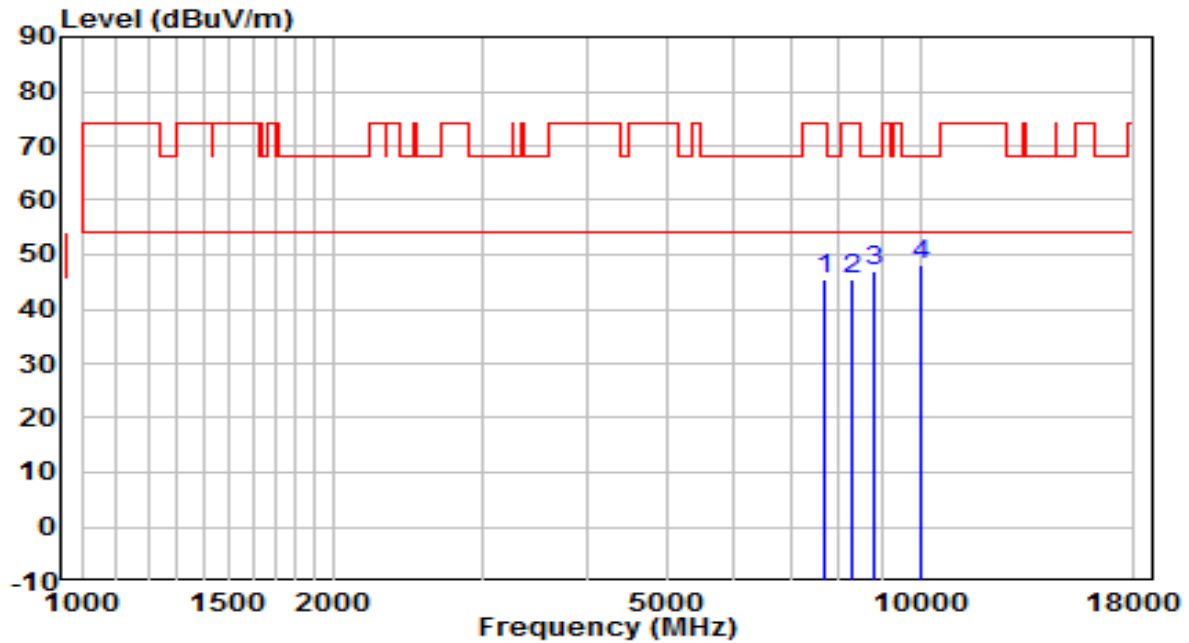


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7672.500	33.33	12.00	45.33	-28.67	74.00	Peak
2	8293.000	32.99	12.49	45.47	-28.53	74.00	Peak
3	8803.000	33.66	13.20	46.86	-21.34	68.20	Peak
4	* 10035.500	32.49	15.48	47.98	-20.22	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	120V/60Hz

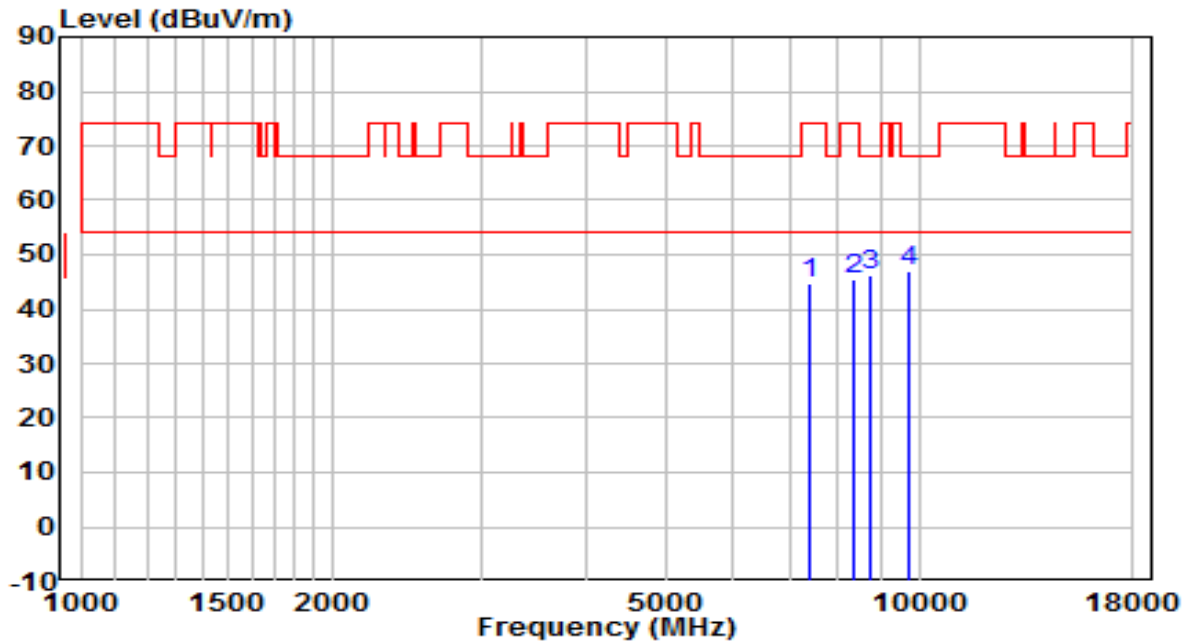


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7392.000	33.35	11.41	44.75	-29.25	74.00	Peak
2	8335.500	33.00	12.48	45.48	-28.52	74.00	Peak
3	8760.500	33.13	13.09	46.23	-21.97	68.20	Peak
4	* 9746.500	32.08	14.88	46.96	-21.24	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	120V/60Hz

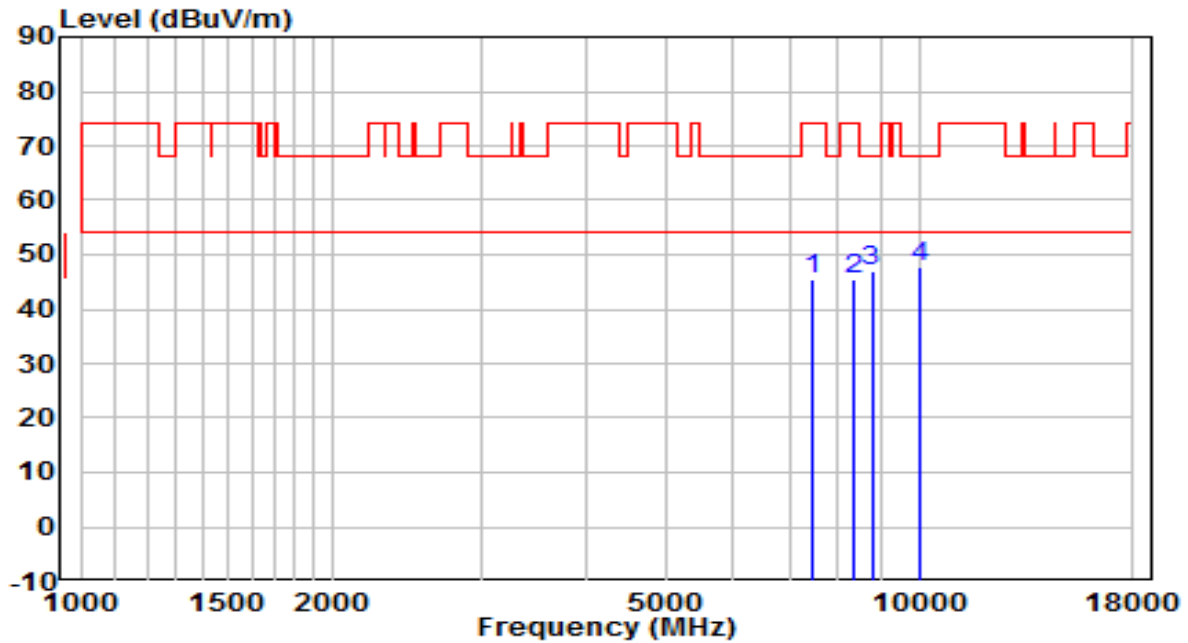


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7460.000	34.02	11.60	45.63	-28.37	74.00	Peak
2	8327.000	33.05	12.48	45.53	-28.47	74.00	Peak
3	8777.500	33.80	13.13	46.93	-21.27	68.20	Peak
4	* 10044.000	32.27	15.51	47.78	-20.42	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	120V/60Hz

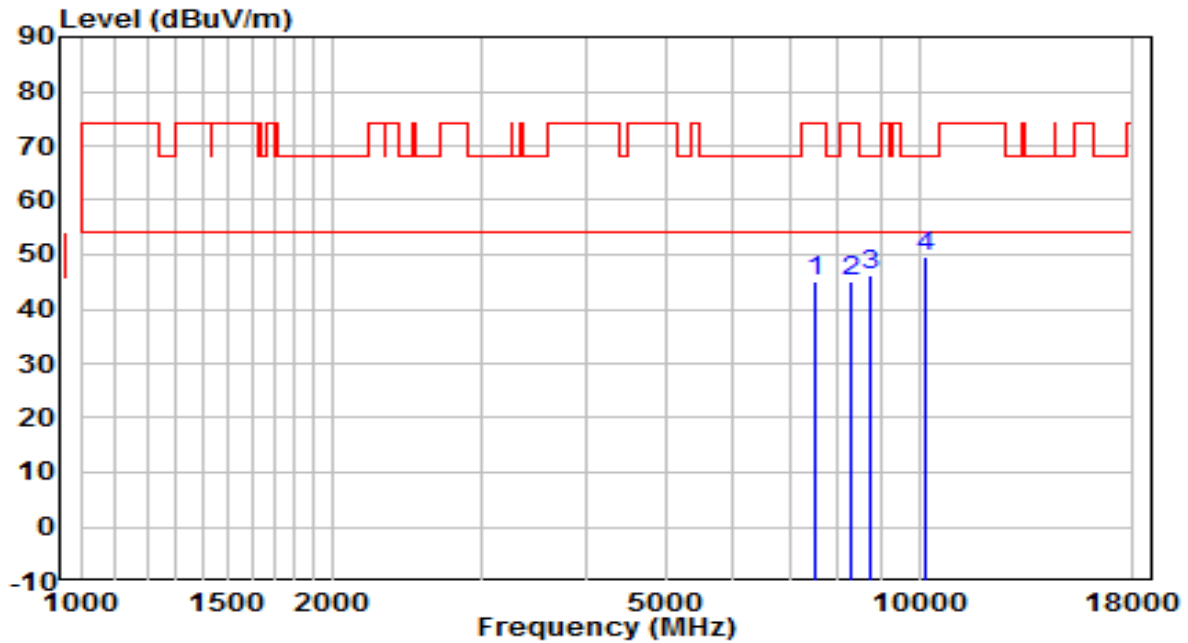


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7536.500	33.25	11.77	45.02	-28.98	74.00	Peak
2	8301.500	32.73	12.48	45.22	-28.78	74.00	Peak
3	8769.000	33.22	13.11	46.33	-21.87	68.20	Peak
4	* 10197.000	33.45	16.03	49.49	-18.71	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	120V/60Hz

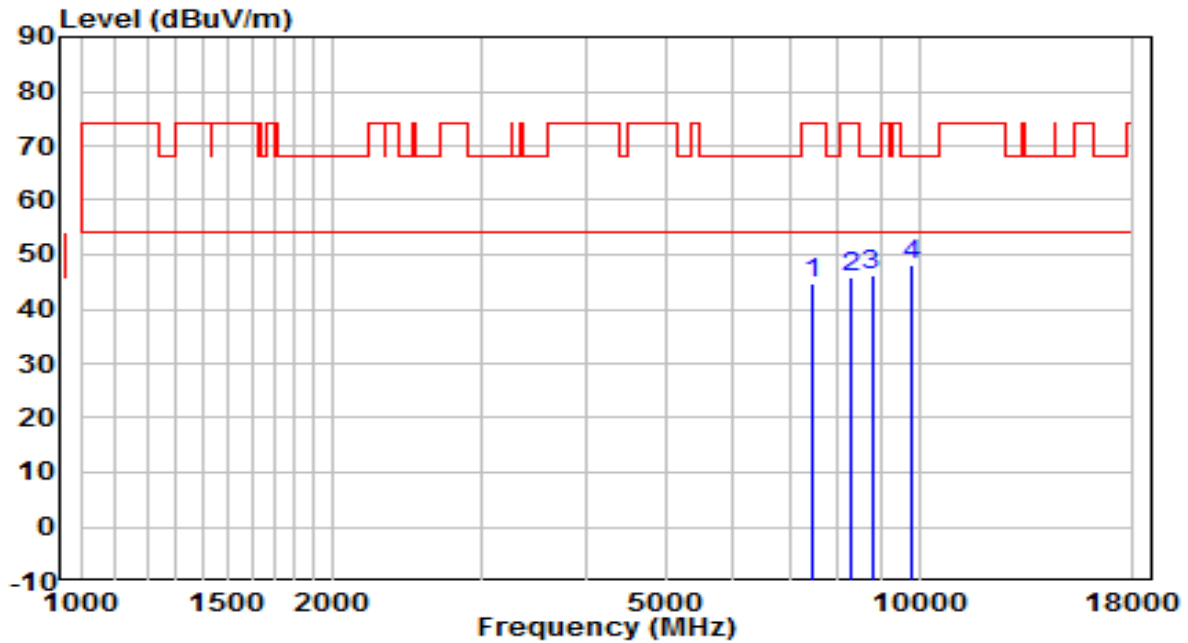


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7460.000	33.08	11.60	44.68	-29.32	74.00	Peak
2	8284.500	33.27	12.49	45.76	-28.24	74.00	Peak
3	8777.500	33.00	13.13	46.14	-22.06	68.20	Peak
4	* 9806.000	32.94	15.00	47.94	-20.26	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5220MHz	Test Voltage	120V/60Hz

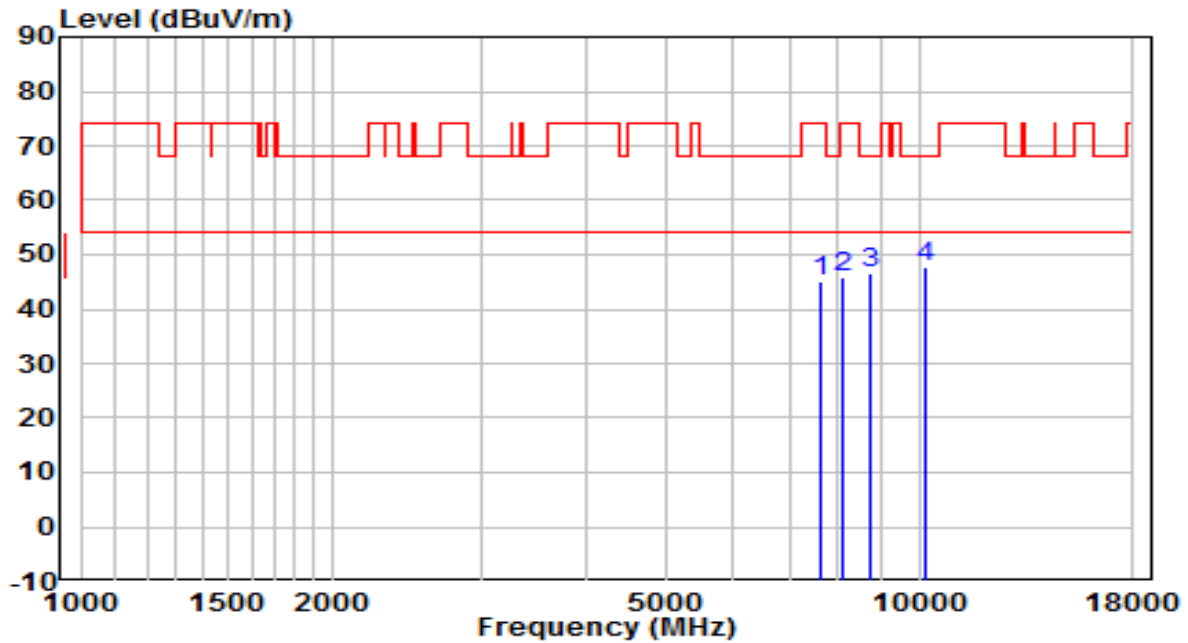


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7621.500	33.32	11.91	45.23	-28.77	74.00	Peak
2	8097.500	33.48	12.52	45.99	-28.01	74.00	Peak
3	8752.000	33.58	13.07	46.66	-21.54	68.20	Peak
4	* 10171.500	31.65	15.95	47.59	-20.61	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5220MHz	Test Voltage	120V/60Hz

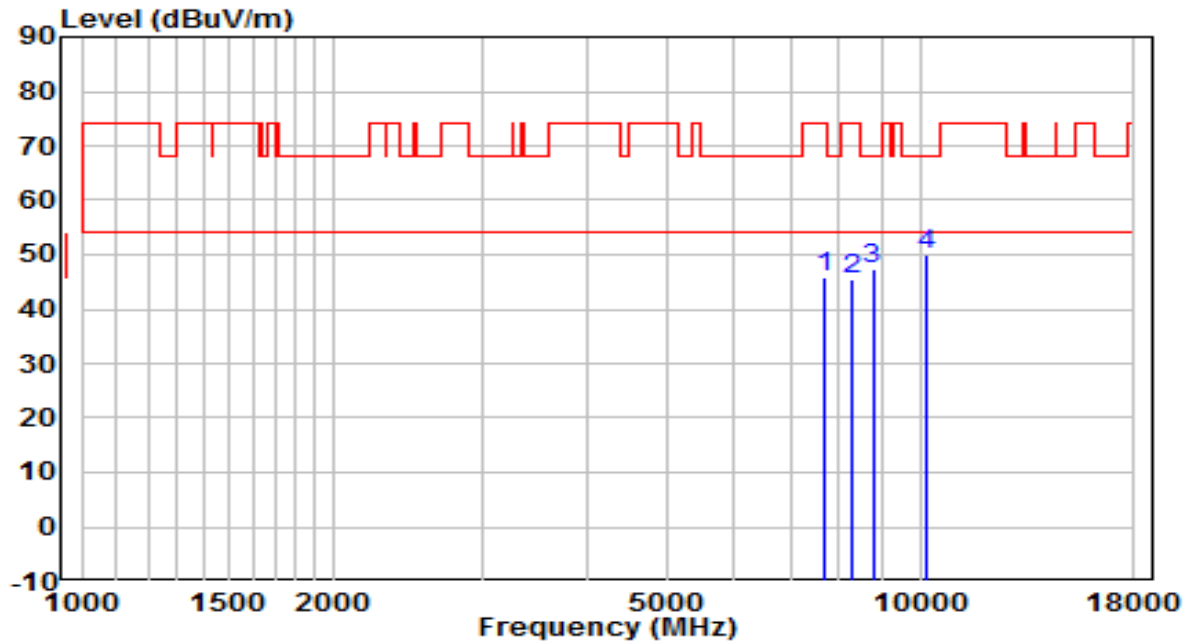


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7681.000	33.79	12.01	45.80	-28.20	74.00	Peak
2	8318.500	32.91	12.48	45.39	-28.61	74.00	Peak
3	8777.500	34.25	13.13	47.39	-20.81	68.20	Peak
4	* 10197.000	33.79	16.03	49.82	-18.38	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz	Test Voltage	120V/60Hz

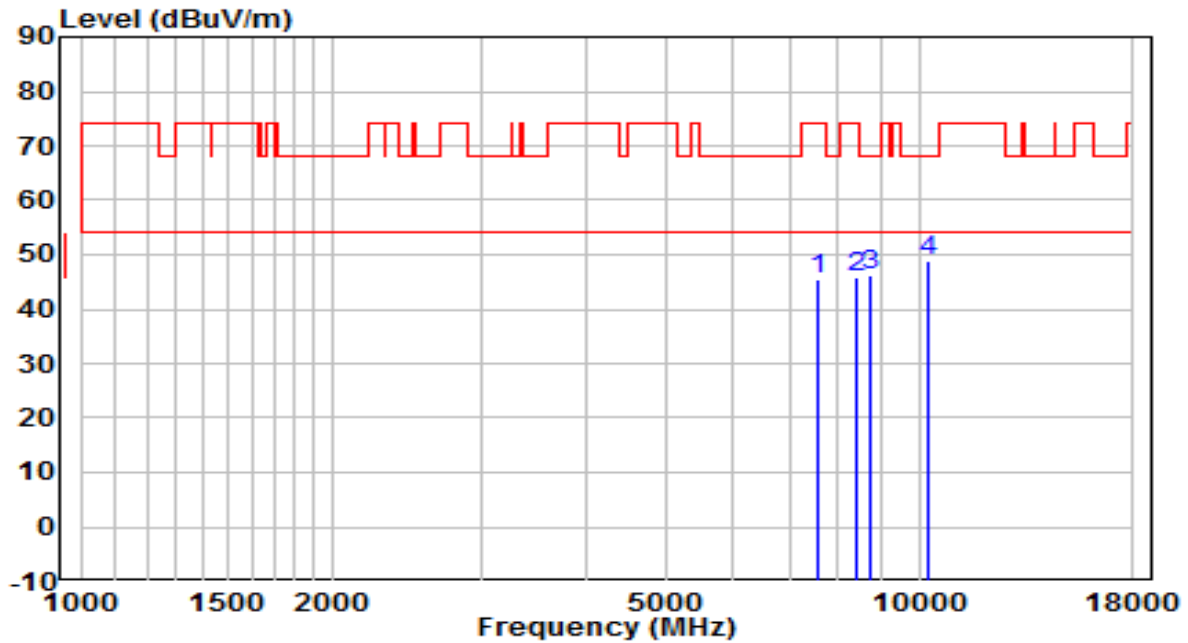


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7596.000	33.71	11.87	45.58	-28.42	74.00	Peak
2	8412.000	33.27	12.47	45.74	-28.26	74.00	Peak
3	8735.000	33.38	13.03	46.41	-21.79	68.20	Peak
4	* 10265.000	32.66	16.27	48.93	-19.27	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz	Test Voltage	120V/60Hz

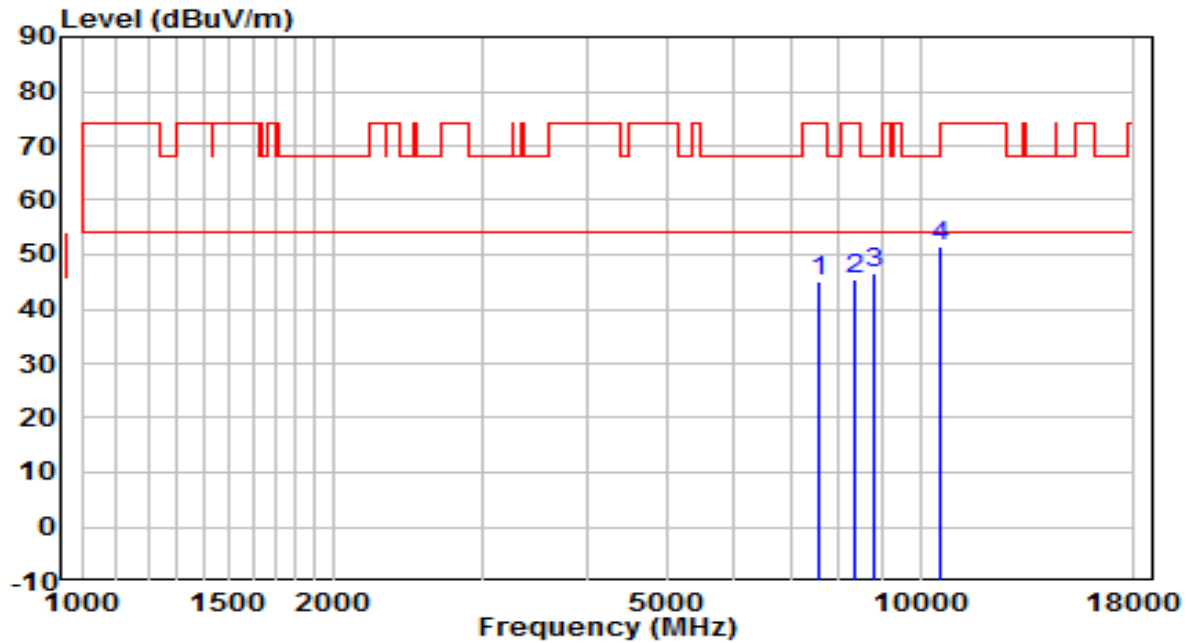


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7562.000	33.22	11.82	45.03	-28.97	74.00	Peak
2	8344.000	32.88	12.48	45.36	-28.64	74.00	Peak
3	8794.500	33.56	13.18	46.74	-21.46	68.20	Peak
4	* 10579.500	34.22	17.18	51.40	-16.80	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5260MHz	Test Voltage	120V/60Hz

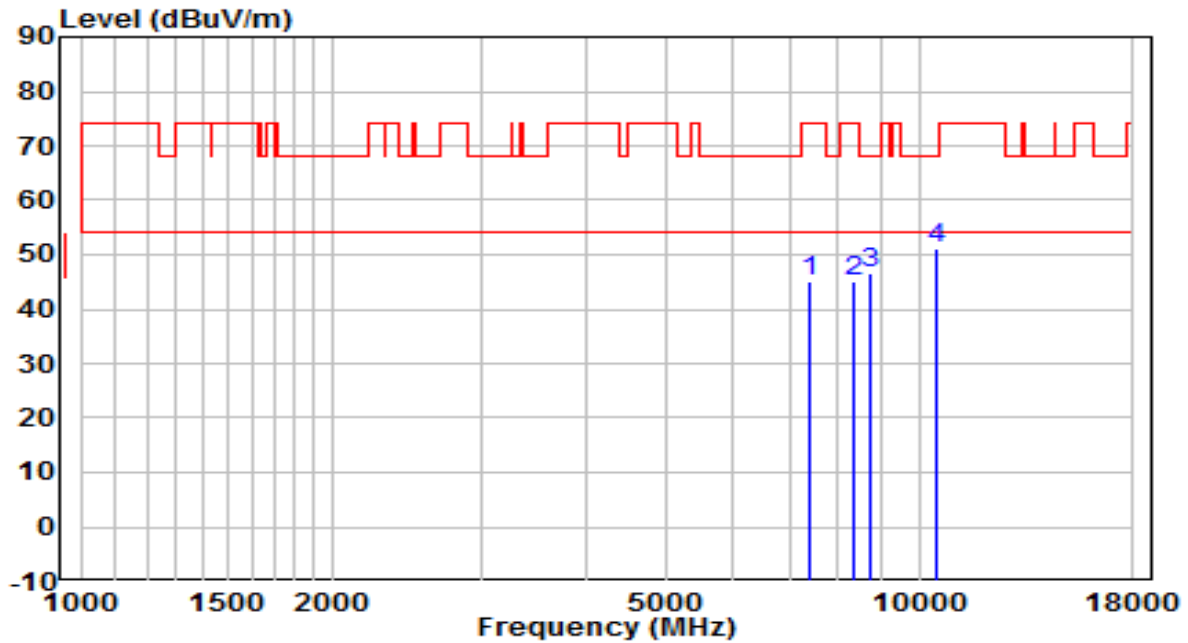


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7392.000	33.81	11.41	45.22	-28.78	74.00	Peak
2	8327.000	32.71	12.48	45.19	-28.81	74.00	Peak
3	8743.500	33.47	13.05	46.52	-21.68	68.20	Peak
4	* 10520.000	34.11	17.10	51.21	-16.99	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5260MHz	Test Voltage	120V/60Hz

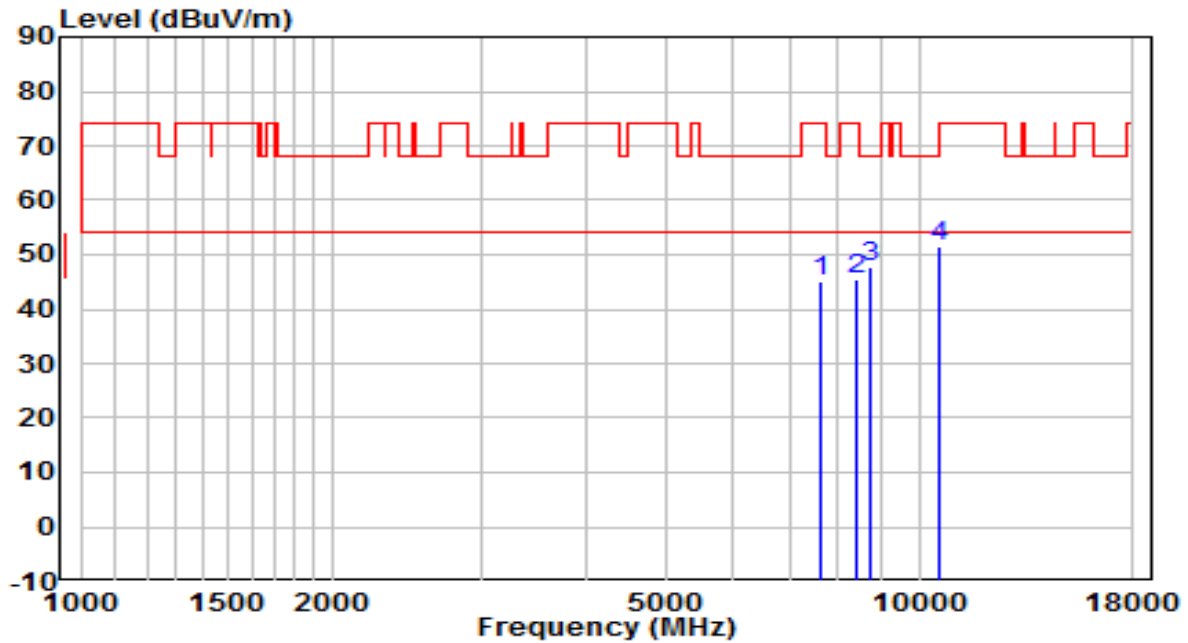


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7638.500	33.05	11.94	44.99	-29.01	74.00	Peak
2	8420.500	33.06	12.47	45.52	-28.48	74.00	Peak
3	8752.000	34.50	13.07	47.57	-20.63	68.20	Peak
4	* 10588.000	34.29	17.19	51.48	-16.72	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5300MHz	Test Voltage	120V/60Hz

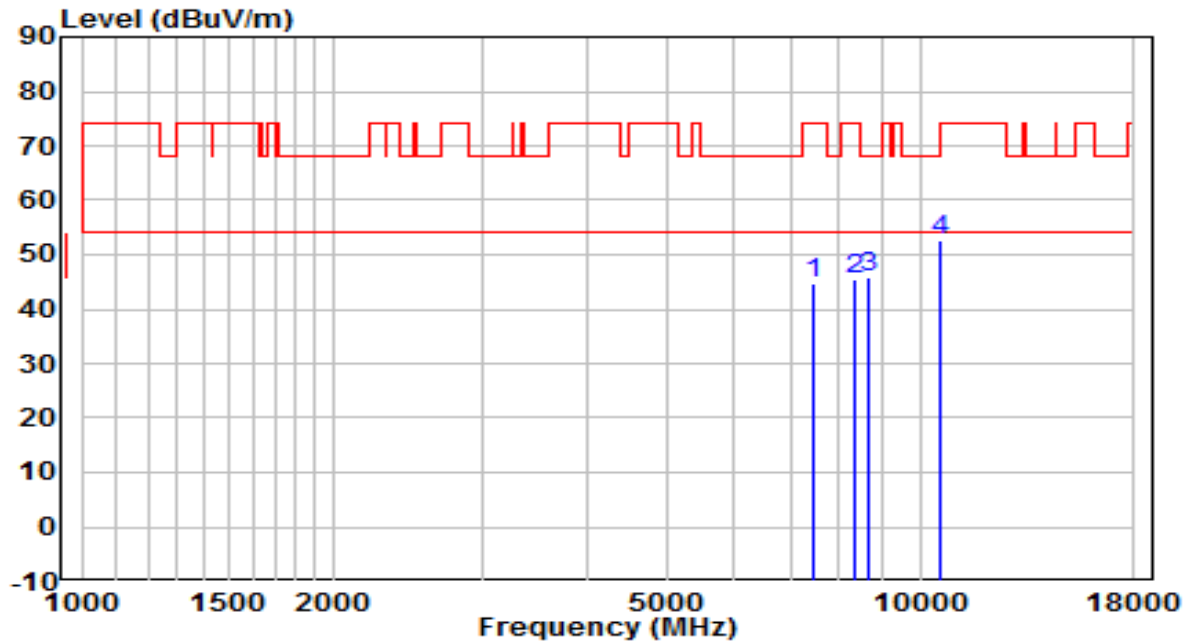


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	33.03	11.65	44.68	-29.32	74.00	Peak
2	8344.000	33.02	12.48	45.50	-28.50	74.00	Peak
3	8650.000	33.18	12.82	46.00	-22.20	68.20	Peak
4	* 10596.500	35.26	17.21	52.47	-15.73	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5300MHz	Test Voltage	120V/60Hz

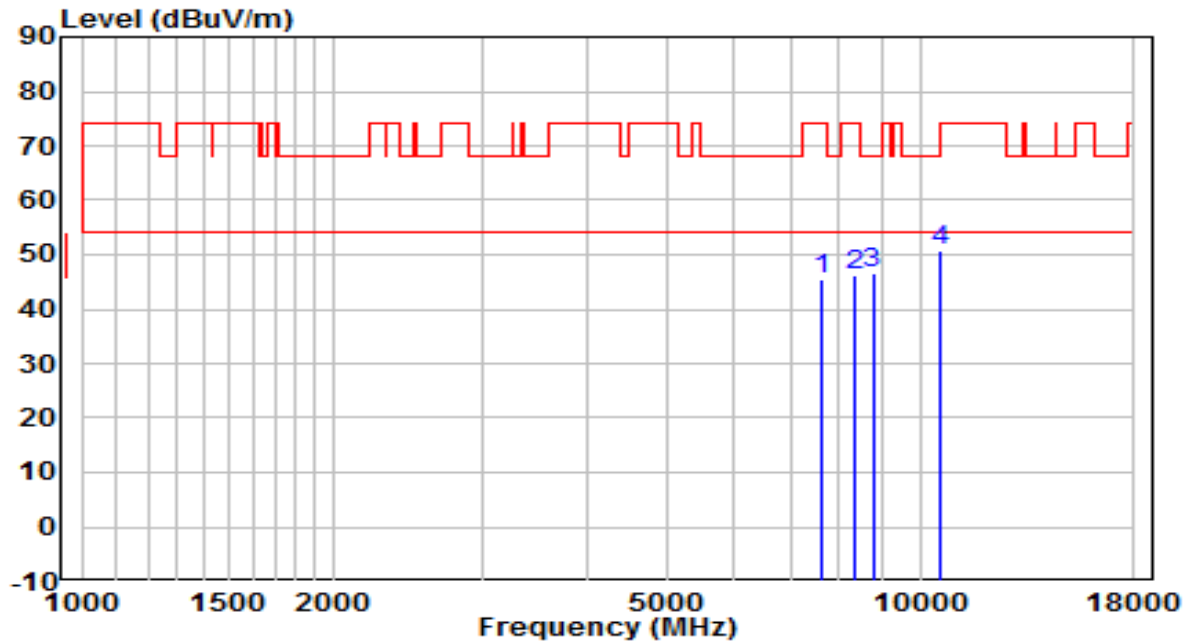


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7647.000	33.63	11.95	45.58	-28.42	74.00	Peak
2	8352.500	33.68	12.48	46.15	-27.85	74.00	Peak
3	8777.500	33.51	13.13	46.65	-21.55	68.20	Peak
4	* 10571.000	33.47	17.17	50.65	-17.55	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	120V/60Hz

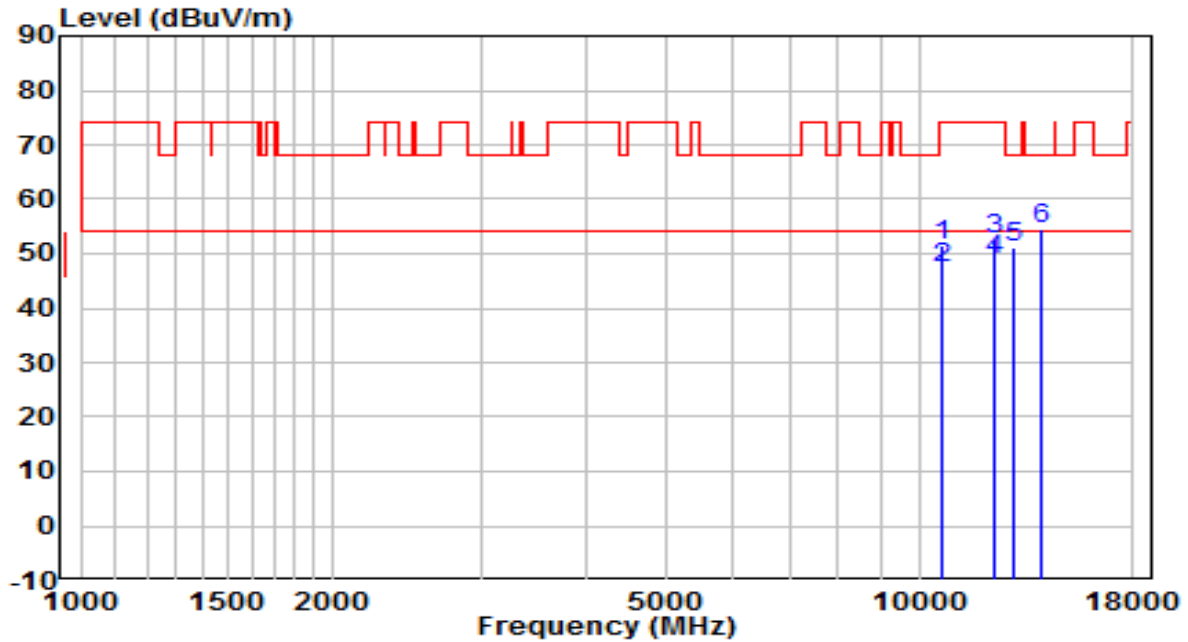


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	10639.000	34.20	17.27	51.47	-22.53	74.00	Peak
2	10639.000	30.16	17.27	47.43	-6.57	54.00	Average
3	12279.500	34.79	17.87	52.66	-21.34	74.00	Peak
4	* 12279.500	31.06	17.87	48.93	-5.07	54.00	Average
5	12993.500	31.74	19.27	51.01	-17.19	68.20	Peak
6	* 13954.000	33.16	21.43	54.59	-13.61	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	120V/60Hz

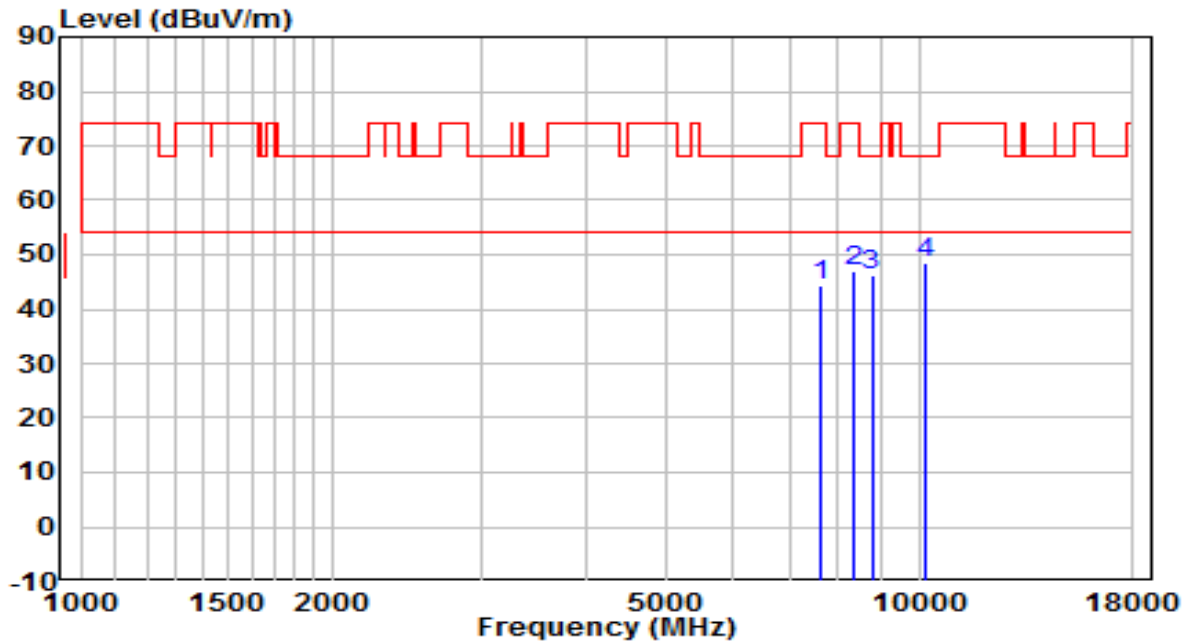


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7647.000	32.43	11.95	44.38	-29.62	74.00	Peak
2	8335.500	34.51	12.48	46.99	-27.01	74.00	Peak
3	8777.500	33.25	13.13	46.39	-21.81	68.20	Peak
4	* 10180.000	32.64	15.98	48.62	-19.58	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	120V/60Hz

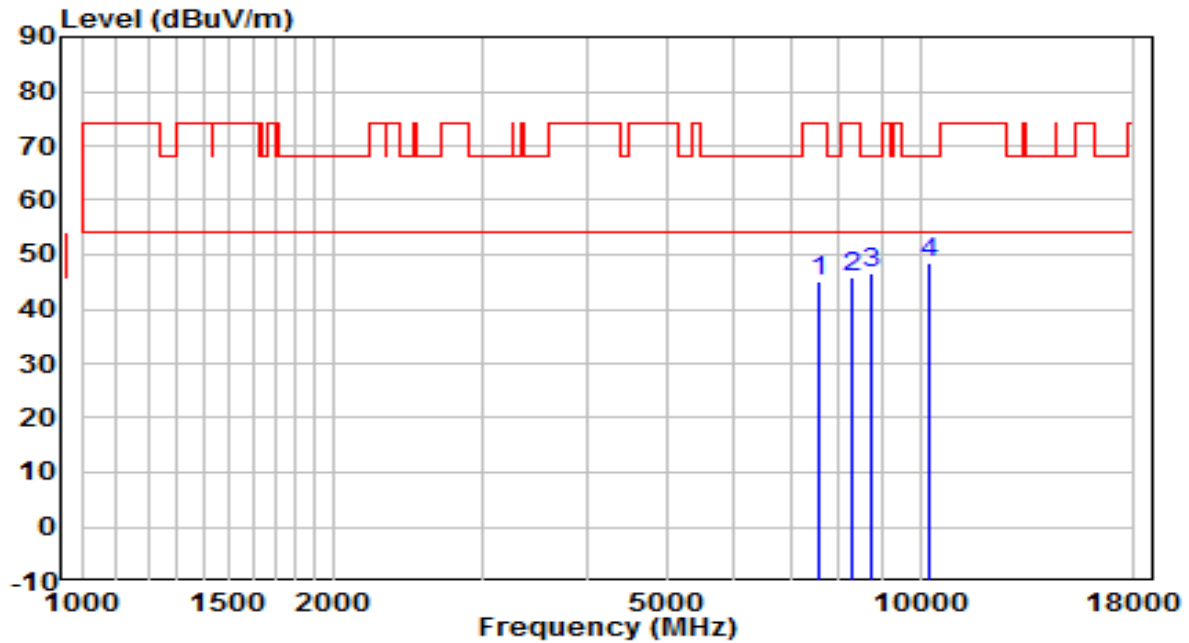


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7570.500	33.13	11.83	44.96	-29.04	74.00	Peak
2	8284.500	33.19	12.49	45.68	-28.32	74.00	Peak
3	8760.500	33.33	13.09	46.42	-21.78	68.20	Peak
4	* 10273.500	32.12	16.30	48.41	-19.79	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	120V/60Hz

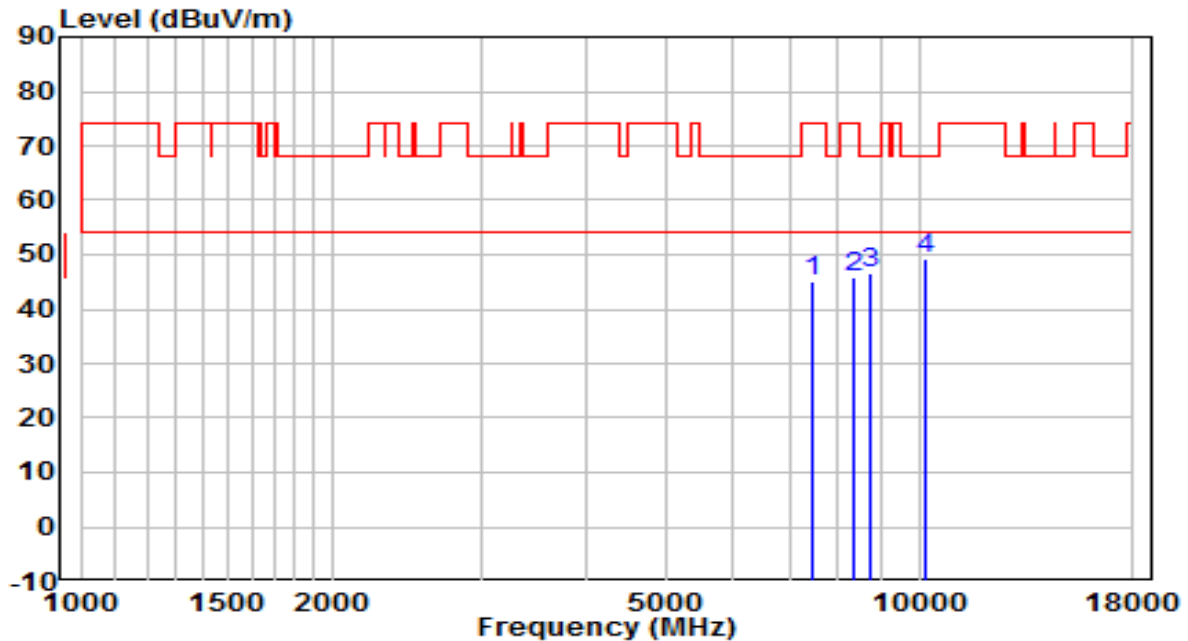


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7485.500	33.28	11.67	44.95	-29.05	74.00	Peak
2	8352.500	33.30	12.48	45.77	-28.23	74.00	Peak
3	8760.500	33.50	13.09	46.59	-21.61	68.20	Peak
4	* 10205.500	33.19	16.06	49.25	-18.95	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5580MHz	Test Voltage	120V/60Hz

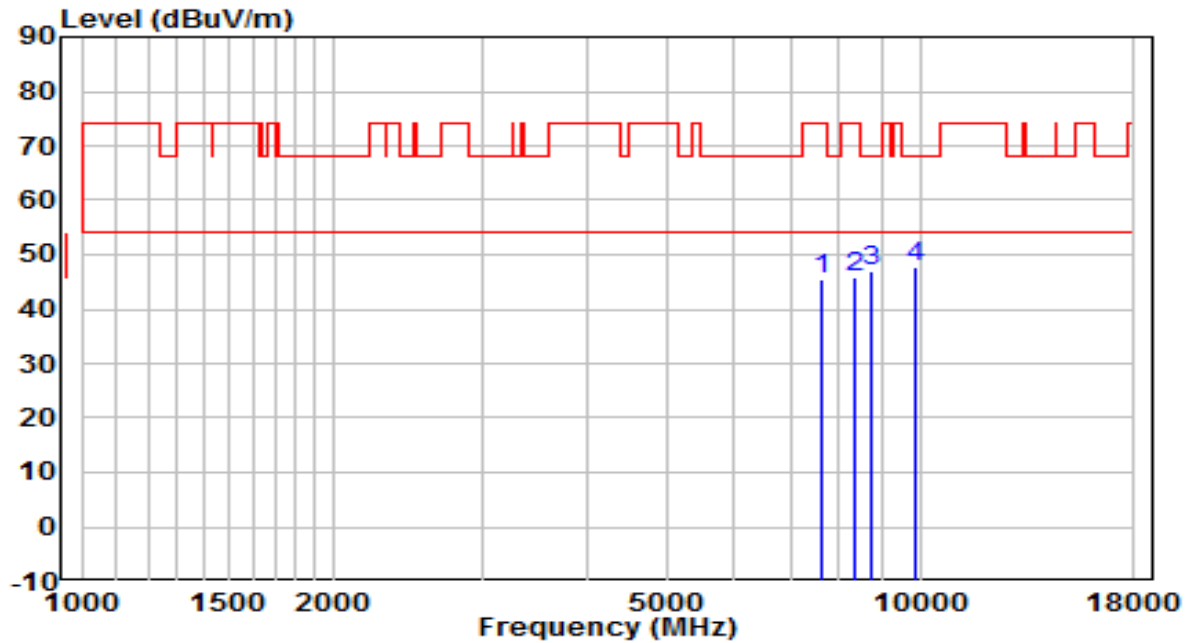


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7630.000	33.64	11.93	45.57	-28.43	74.00	Peak
2	8369.500	33.40	12.47	45.87	-28.13	74.00	Peak
3	8769.000	33.87	13.11	46.98	-21.22	68.20	Peak
4	* 9882.500	32.69	15.14	47.83	-20.37	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5580MHz	Test Voltage	120V/60Hz

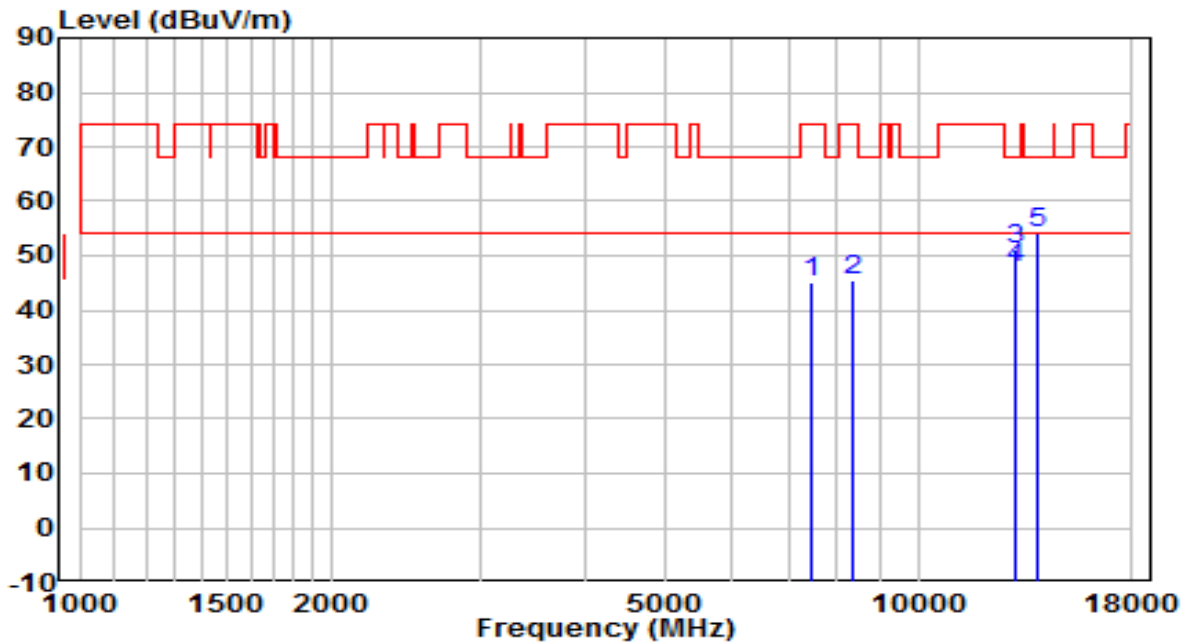


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	7443.000	33.65	11.55	45.20	-28.80	74.00	Peak
2	8352.500	33.13	12.48	45.61	-28.39	74.00	Peak
3	13104.000	31.73	19.55	51.28	-16.92	68.20	Peak
4	* 13104.000	28.16	19.55	47.71	-6.29	54.00	Average
5	13928.500	32.93	21.38	54.31	-13.89	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	120V/60Hz

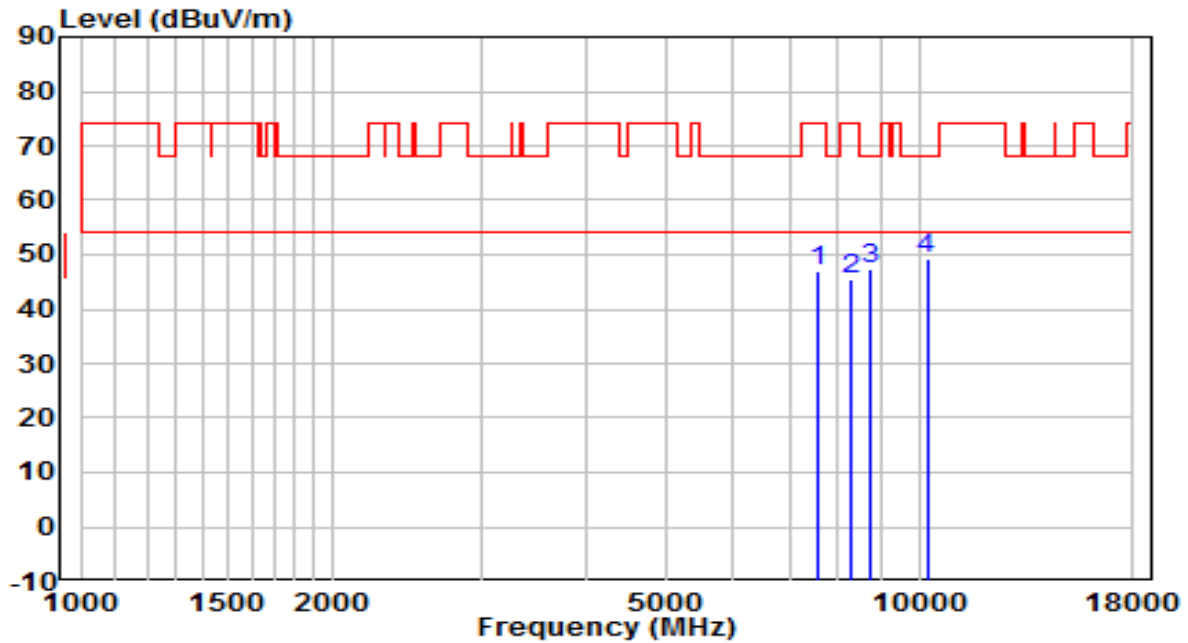


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7596.000	35.09	11.87	46.96	-27.04	74.00	Peak
2	8267.500	33.09	12.49	45.58	-28.42	74.00	Peak
3	8752.000	34.17	13.07	47.25	-20.95	68.20	Peak
4	* 10214.000	33.08	16.09	49.17	-19.03	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	120V/60Hz

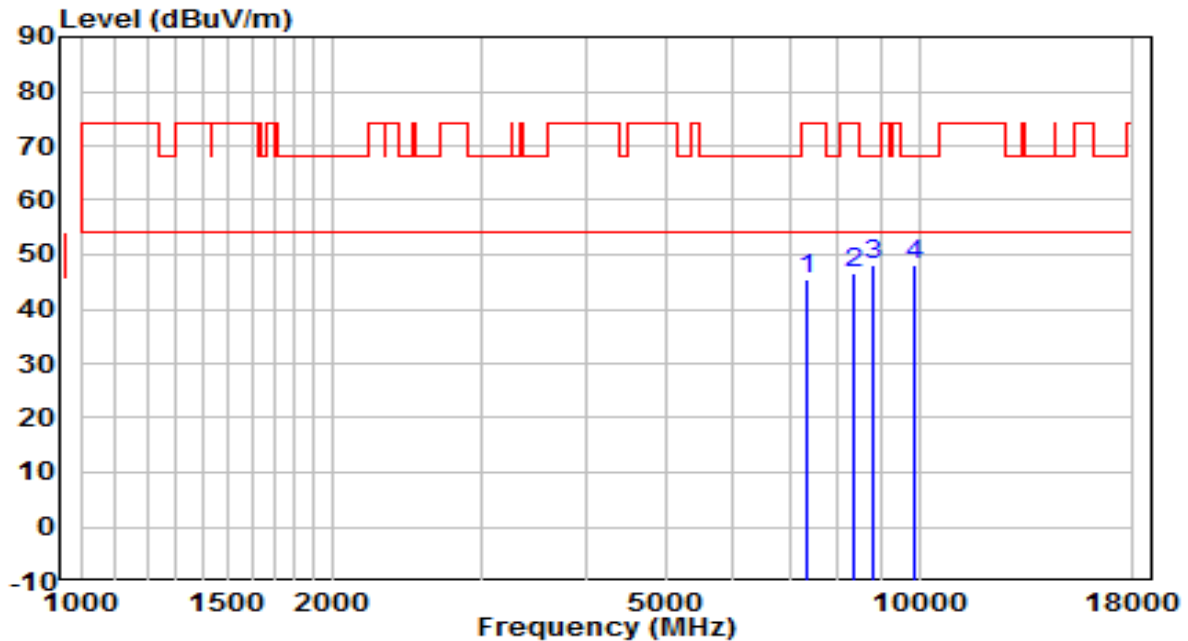


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7324.000	34.18	11.22	45.40	-28.60	74.00	Peak
2	8352.500	34.04	12.48	46.51	-27.49	74.00	Peak
3	* 8786.000	34.79	13.16	47.94	-20.26	68.20	Peak
4	9891.000	32.77	15.16	47.93	-20.27	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5720MHz	Test Voltage	120V/60Hz

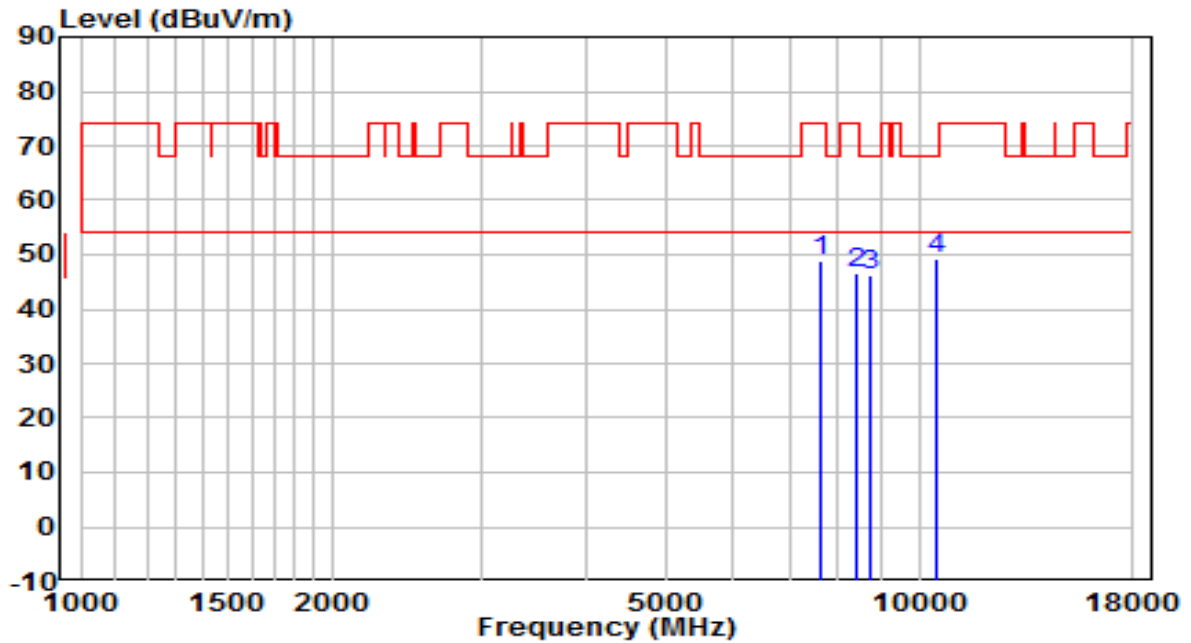


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7630.000	36.88	11.93	48.80	-25.20	74.00	Peak
2	8412.000	34.18	12.47	46.65	-27.35	74.00	Peak
3	8752.000	32.99	13.07	46.06	-22.14	68.20	Peak
4	* 10511.500	32.32	17.09	49.41	-18.79	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5720MHz	Test Voltage	120V/60Hz

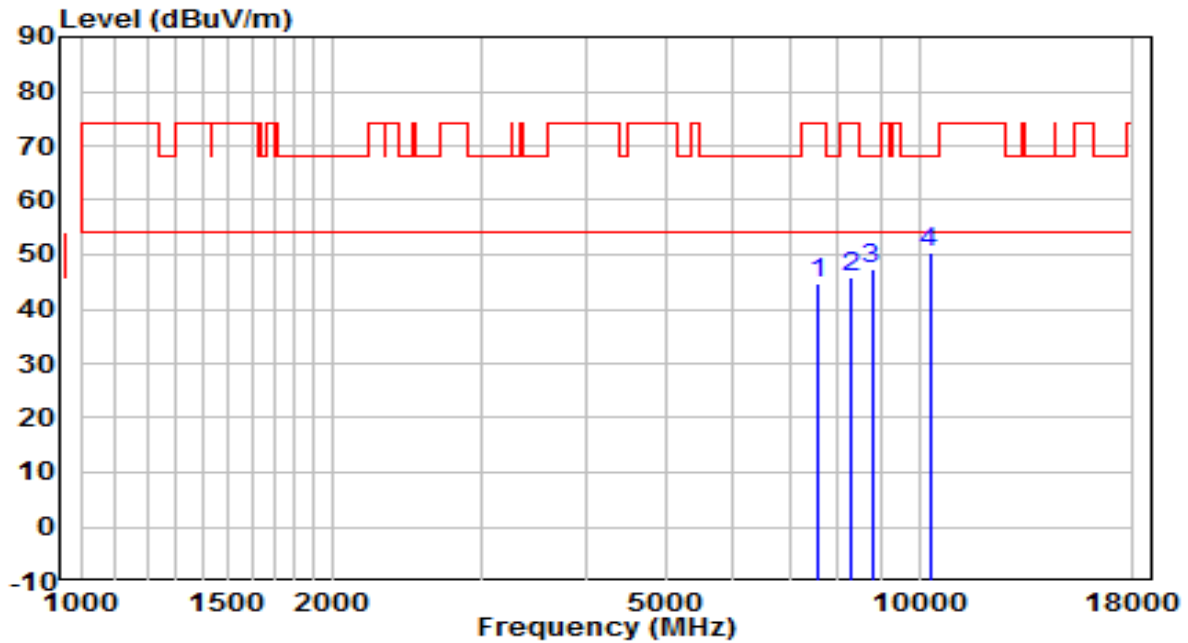


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7562.000	32.98	11.82	44.80	-29.20	74.00	Peak
2	8301.500	33.34	12.48	45.82	-28.18	74.00	Peak
3	8777.500	34.19	13.13	47.32	-20.88	68.20	Peak
4	* 10290.500	33.99	16.35	50.34	-17.86	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	120V/60Hz

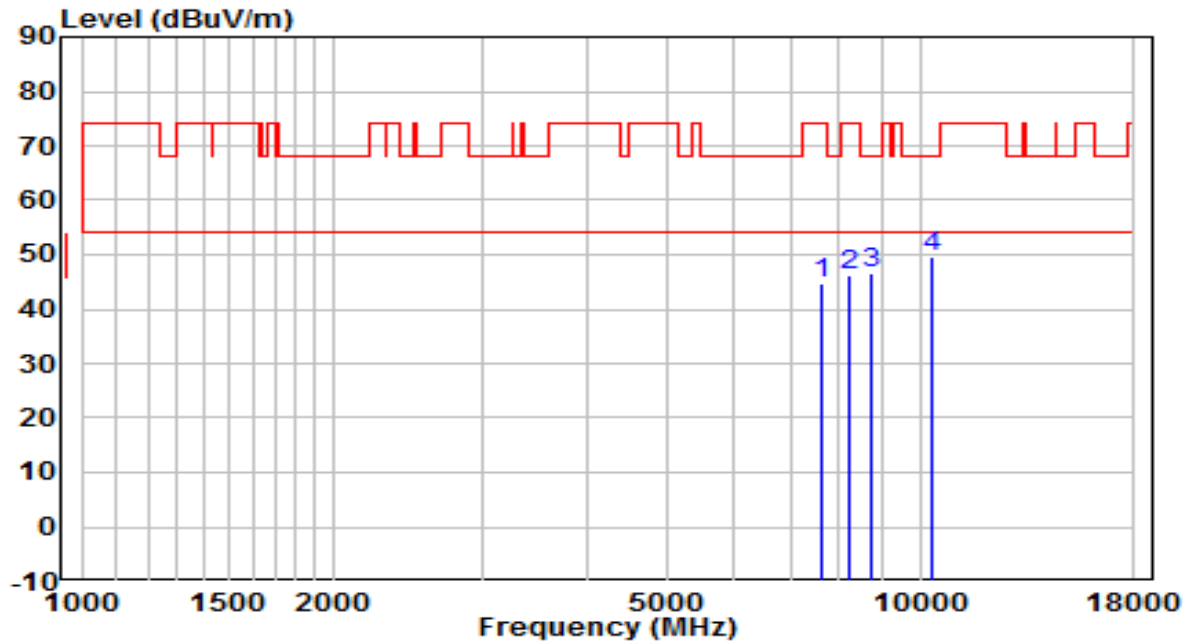


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7621.500	32.76	11.91	44.67	-29.33	74.00	Peak
2	8259.000	33.90	12.49	46.39	-27.61	74.00	Peak
3	8769.000	33.67	13.11	46.79	-21.41	68.20	Peak
4	* 10324.500	33.04	16.47	49.51	-18.69	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	120V/60Hz

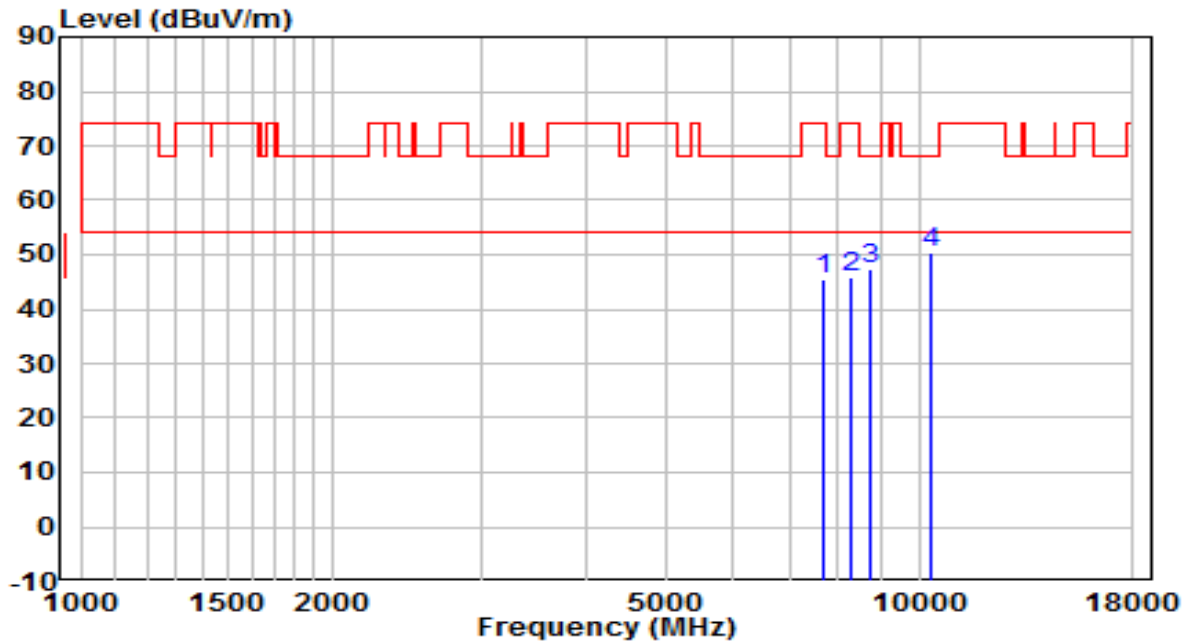


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7664.000	33.43	11.98	45.41	-28.59	74.00	Peak
2	8318.500	33.24	12.48	45.73	-28.27	74.00	Peak
3	8769.000	34.33	13.11	47.45	-20.75	68.20	Peak
4	* 10316.000	34.03	16.44	50.47	-17.73	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5785MHz	Test Voltage	120V/60Hz

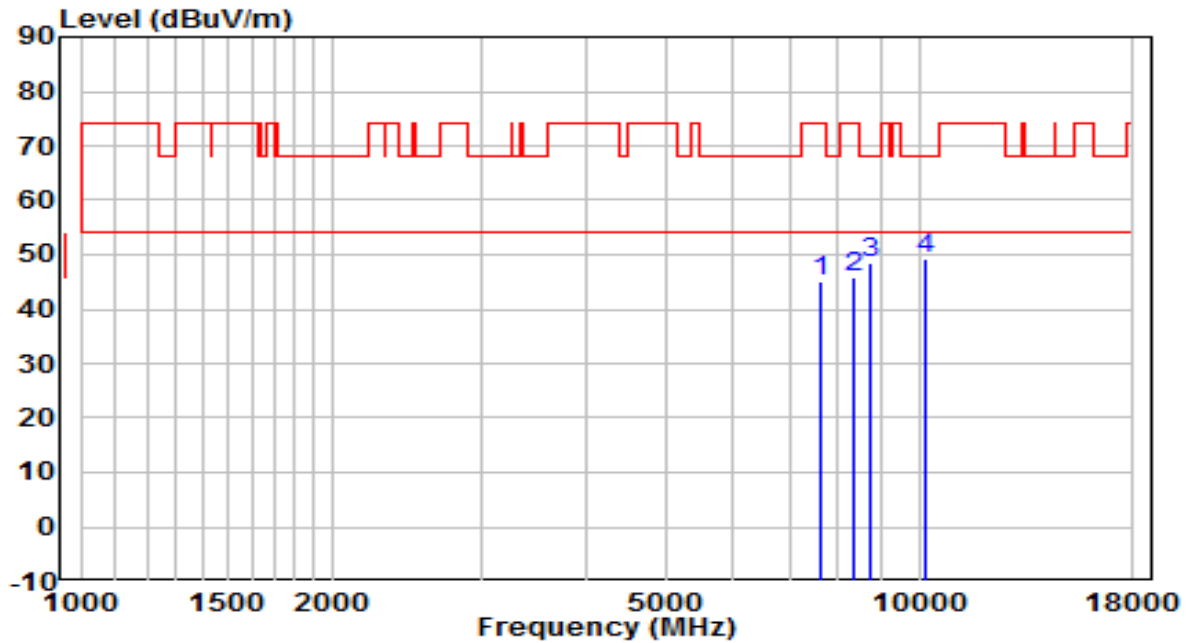


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7638.500	32.99	11.94	44.93	-29.07	74.00	Peak
2	8344.000	33.25	12.48	45.72	-28.28	74.00	Peak
3	8760.500	35.24	13.09	48.33	-19.87	68.20	Peak
4	* 10180.000	33.18	15.98	49.16	-19.04	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5785MHz	Test Voltage	120V/60Hz

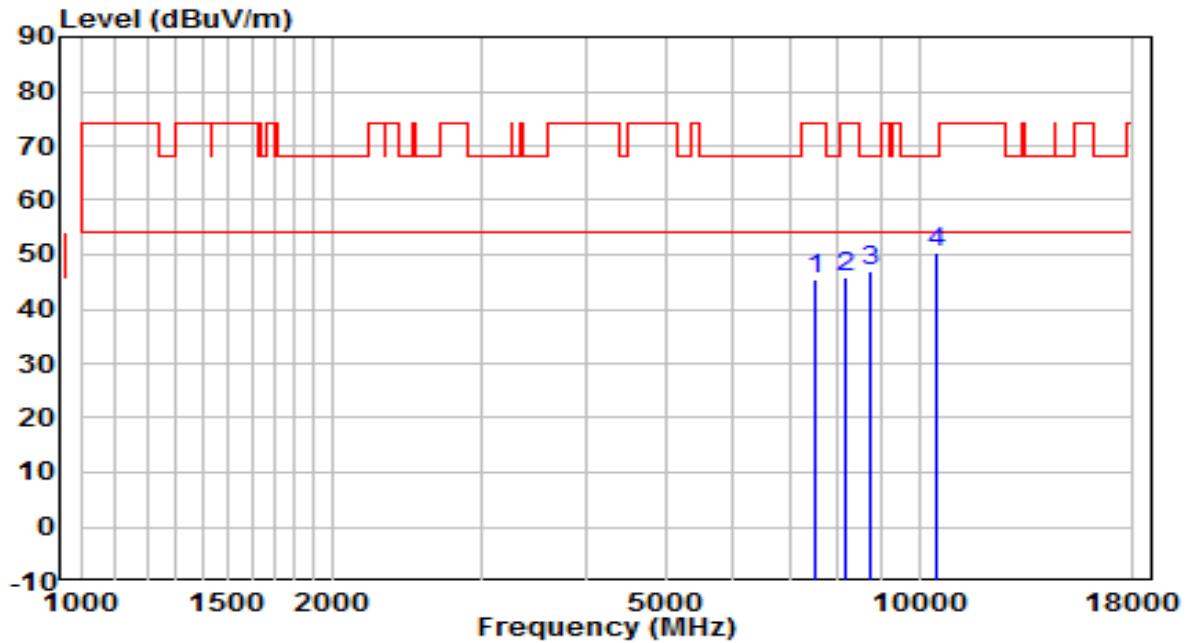


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7528.000	33.62	11.76	45.38	-28.62	74.00	Peak
2	8191.000	33.31	12.50	45.81	-28.19	74.00	Peak
3	8769.000	34.04	13.11	47.15	-21.05	68.20	Peak
4	* 10494.500	33.48	17.05	50.53	-17.67	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	120V/60Hz

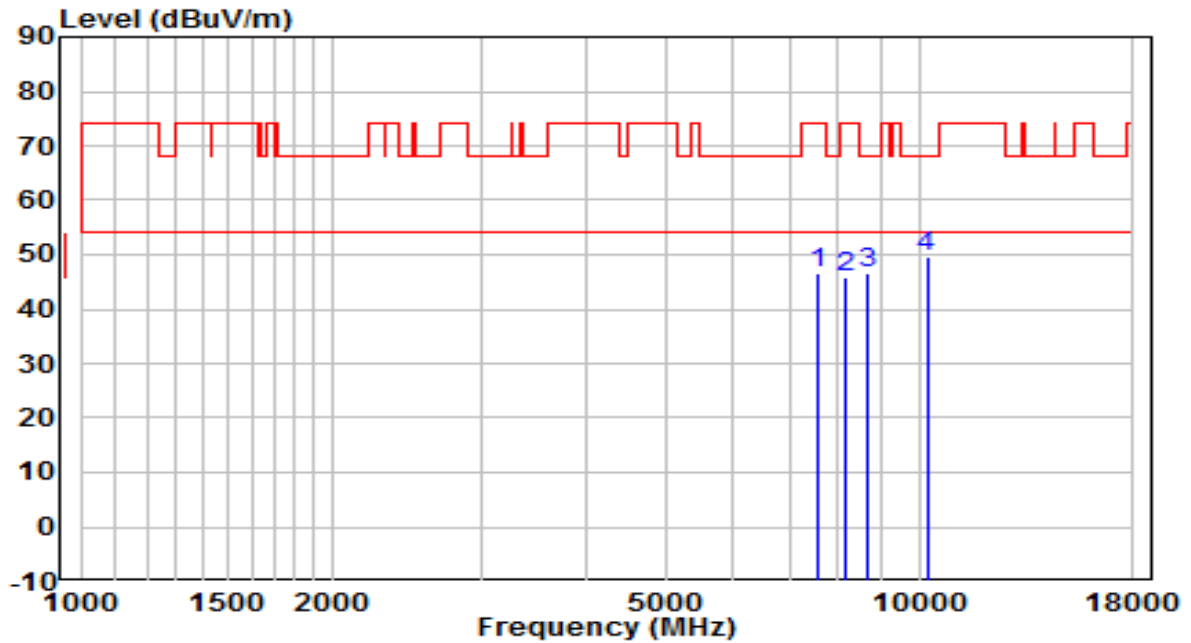


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7562.000	34.82	11.82	46.64	-27.36	74.00	Peak
2	8174.000	33.20	12.50	45.70	-28.30	74.00	Peak
3	8684.000	33.79	12.91	46.70	-21.50	68.20	Peak
4	* 10214.000	33.51	16.09	49.60	-18.60	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	120V/60Hz

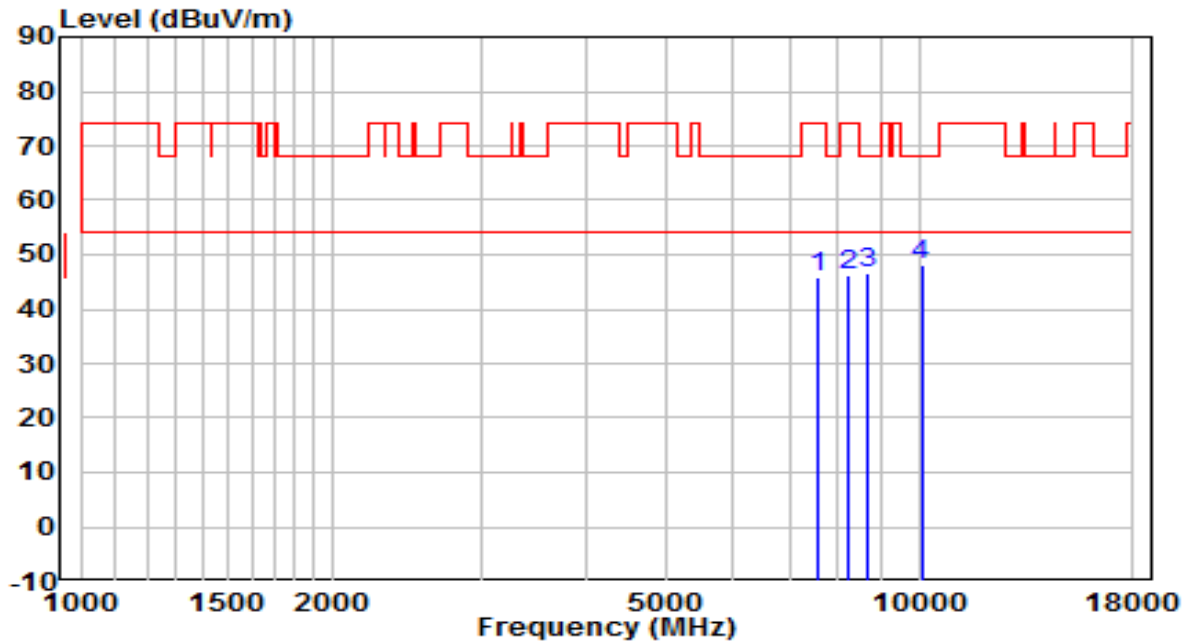


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7553.500	33.88	11.80	45.69	-28.31	74.00	Peak
2	8242.000	33.90	12.49	46.40	-27.60	74.00	Peak
3	8709.500	33.80	12.97	46.77	-21.43	68.20	Peak
4	* 10061.000	32.68	15.57	48.25	-19.95	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	120V/60Hz

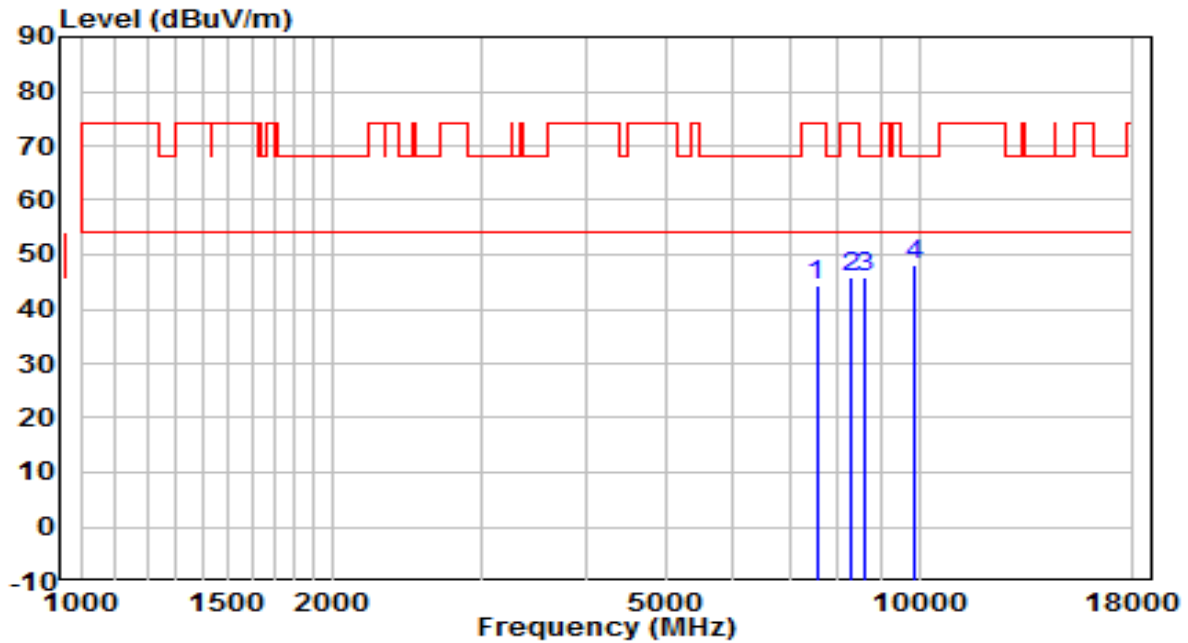


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7545.000	32.61	11.79	44.40	-29.60	74.00	Peak
2	8310.000	33.37	12.48	45.86	-28.14	74.00	Peak
3	8616.000	32.95	12.74	45.69	-22.51	68.20	Peak
4	* 9848.500	33.22	15.08	48.30	-19.90	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	120V/60Hz

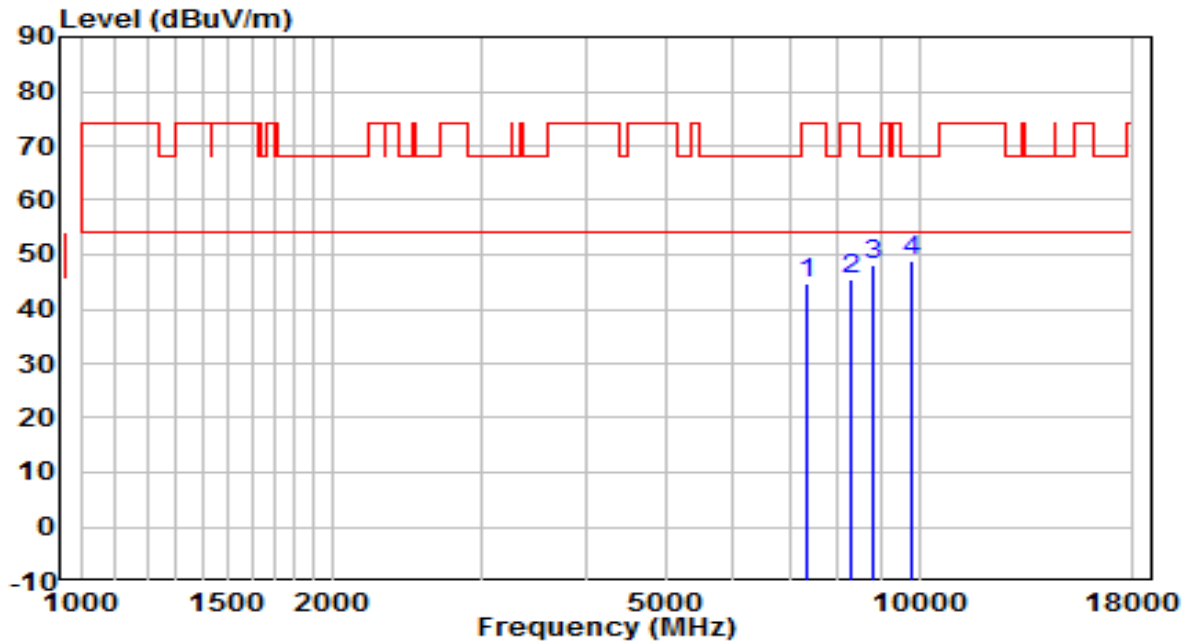


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7324.000	33.53	11.22	44.75	-29.25	74.00	Peak
2	8310.000	32.89	12.48	45.37	-28.63	74.00	Peak
3	8786.000	34.96	13.16	48.12	-20.08	68.20	Peak
4	* 9831.500	33.78	15.04	48.82	-19.38	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz	Test Voltage	120V/60Hz

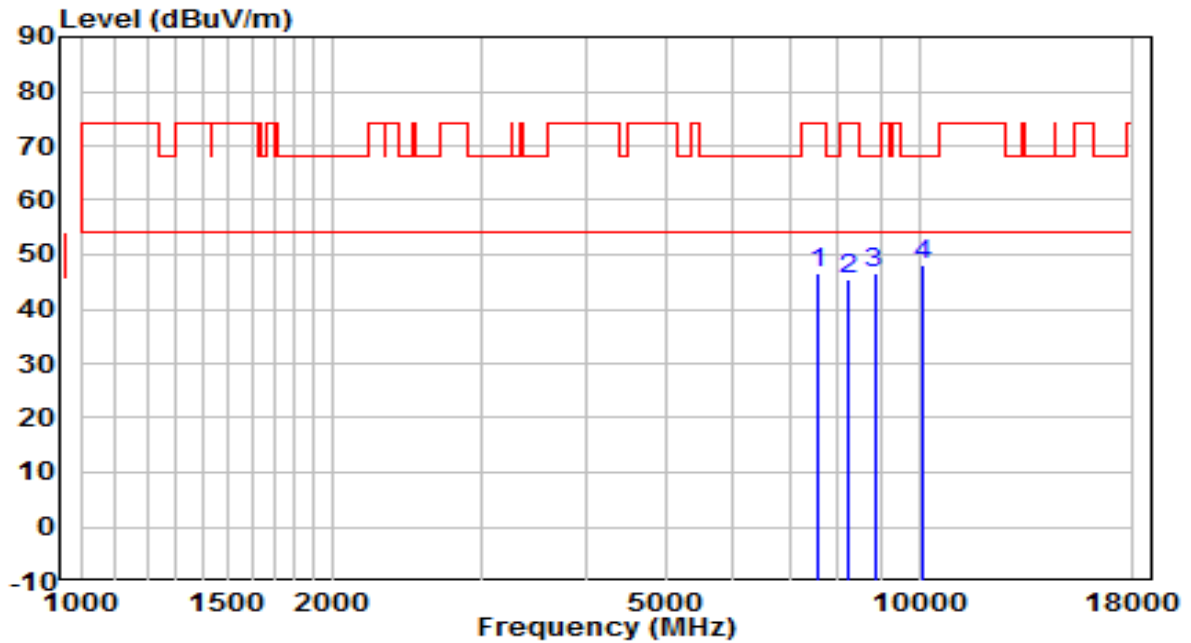


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7553.500	34.86	11.80	46.66	-27.34	74.00	Peak
2	8208.000	32.94	12.50	45.44	-28.56	74.00	Peak
3	8845.500	33.41	13.30	46.71	-21.49	68.20	Peak
4	* 10086.500	32.59	15.66	48.25	-19.95	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz	Test Voltage	120V/60Hz

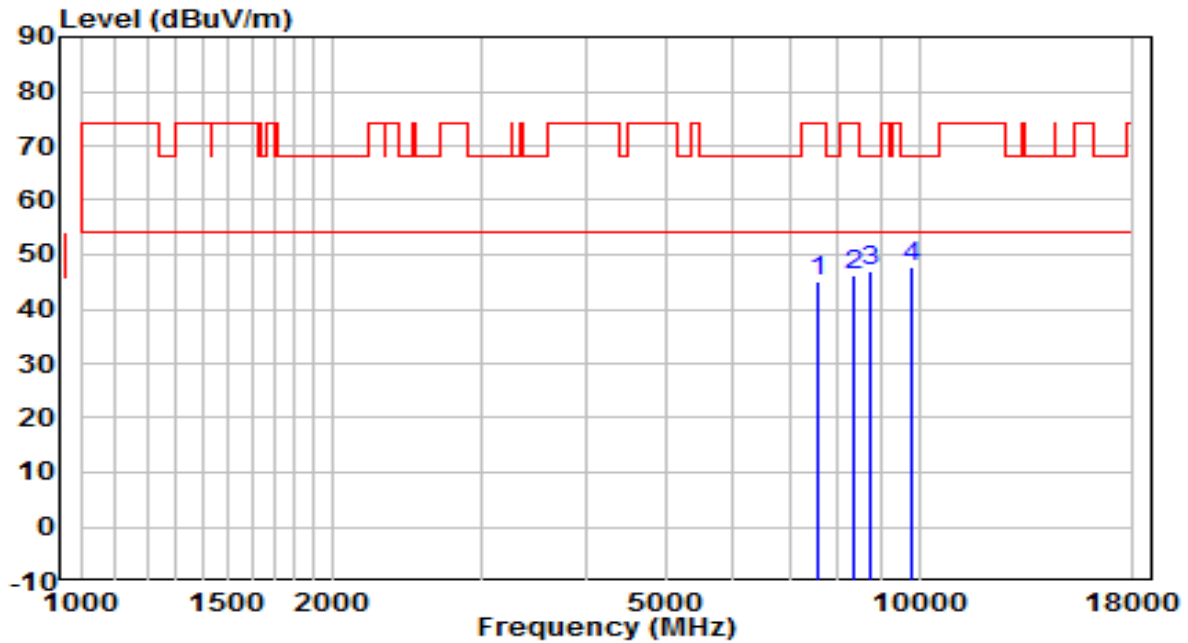


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7553.500	33.39	11.80	45.20	-28.80	74.00	Peak
2	8352.500	33.69	12.48	46.17	-27.83	74.00	Peak
3	8769.000	33.87	13.11	46.99	-21.21	68.20	Peak
4	* 9831.500	32.62	15.04	47.66	-20.54	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5270MHz	Test Voltage	120V/60Hz

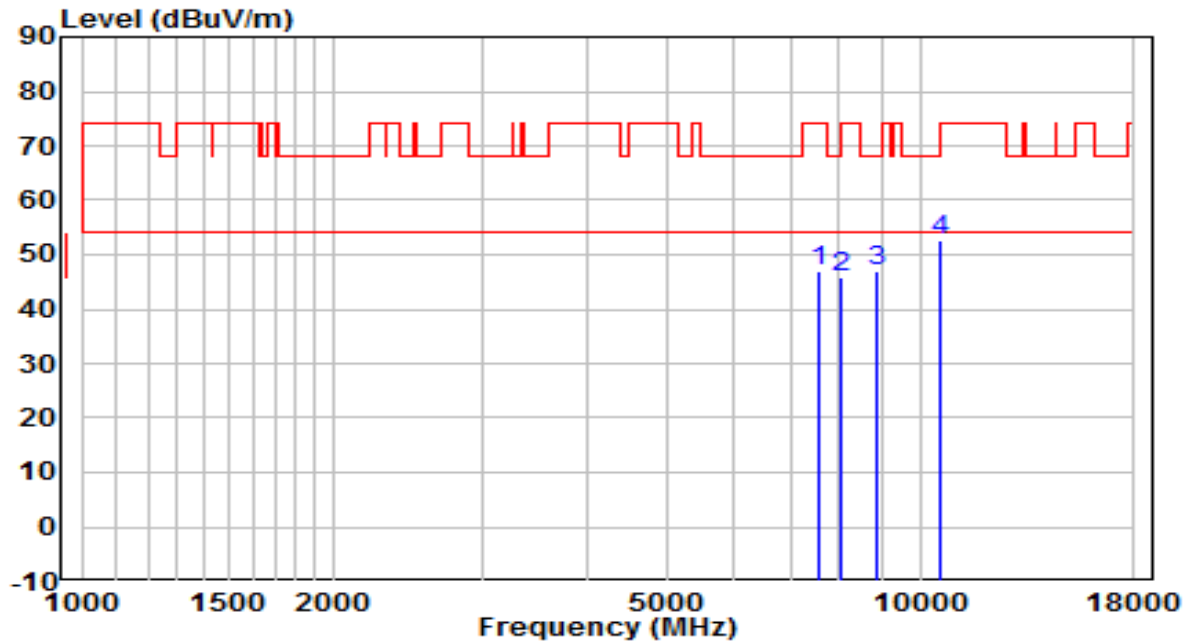


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7596.000	34.95	11.87	46.83	-27.17	74.00	Peak
2	8072.000	33.48	12.52	46.00	-28.00	74.00	Peak
3	8896.500	33.51	13.43	46.93	-21.27	68.20	Peak
4	* 10537.000	35.63	17.12	52.76	-15.44	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5270MHz	Test Voltage	120V/60Hz

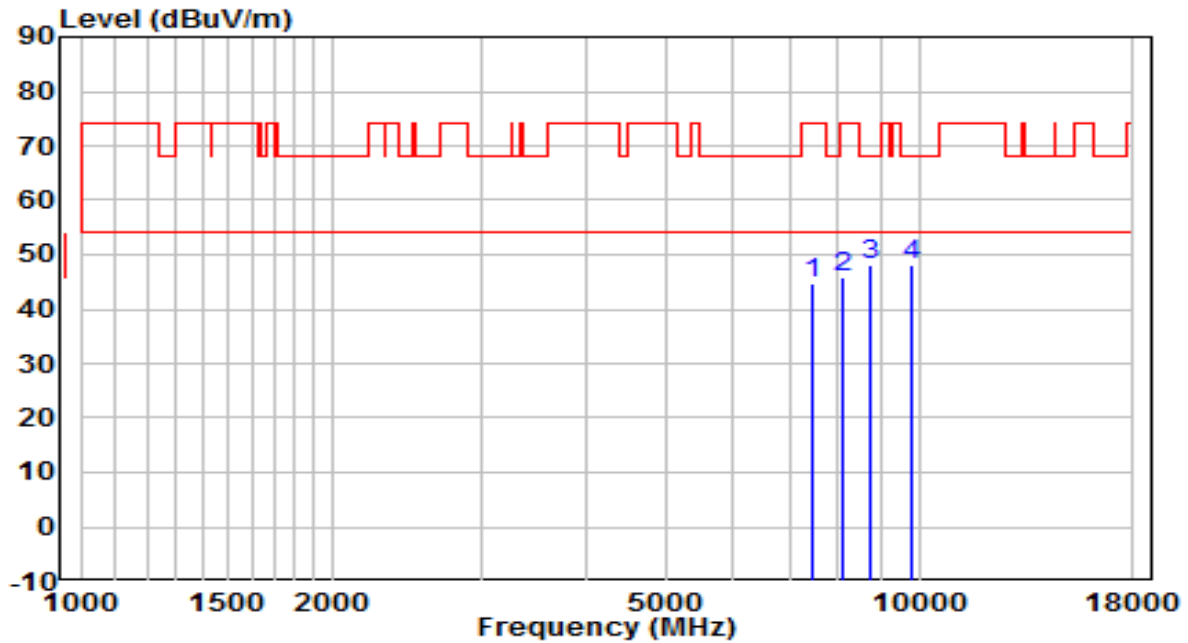


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7460.000	33.19	11.60	44.79	-29.21	74.00	Peak
2	8080.500	33.29	12.52	45.81	-28.19	74.00	Peak
3	8760.500	34.91	13.09	48.00	-20.20	68.20	Peak
4	* 9831.500	33.11	15.04	48.16	-20.04	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	120V/60Hz

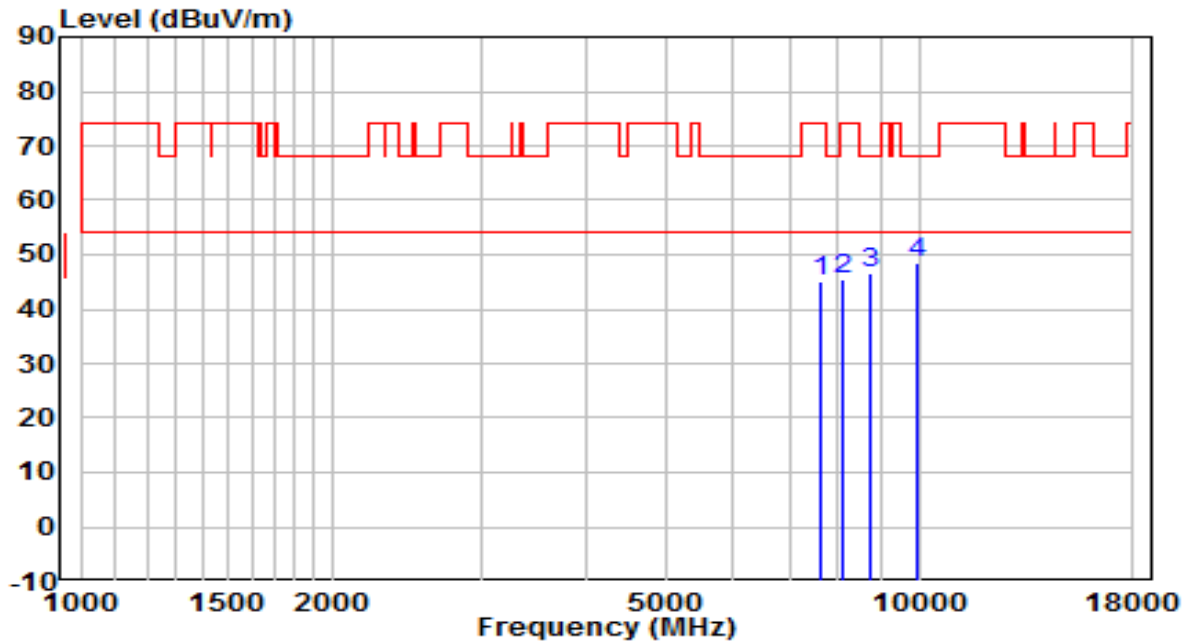


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7655.500	33.15	11.97	45.12	-28.88	74.00	Peak
2	8080.500	32.84	12.52	45.36	-28.64	74.00	Peak
3	8769.000	33.34	13.11	46.45	-21.75	68.20	Peak
4	* 9933.500	33.20	15.23	48.44	-19.76	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	120V/60Hz

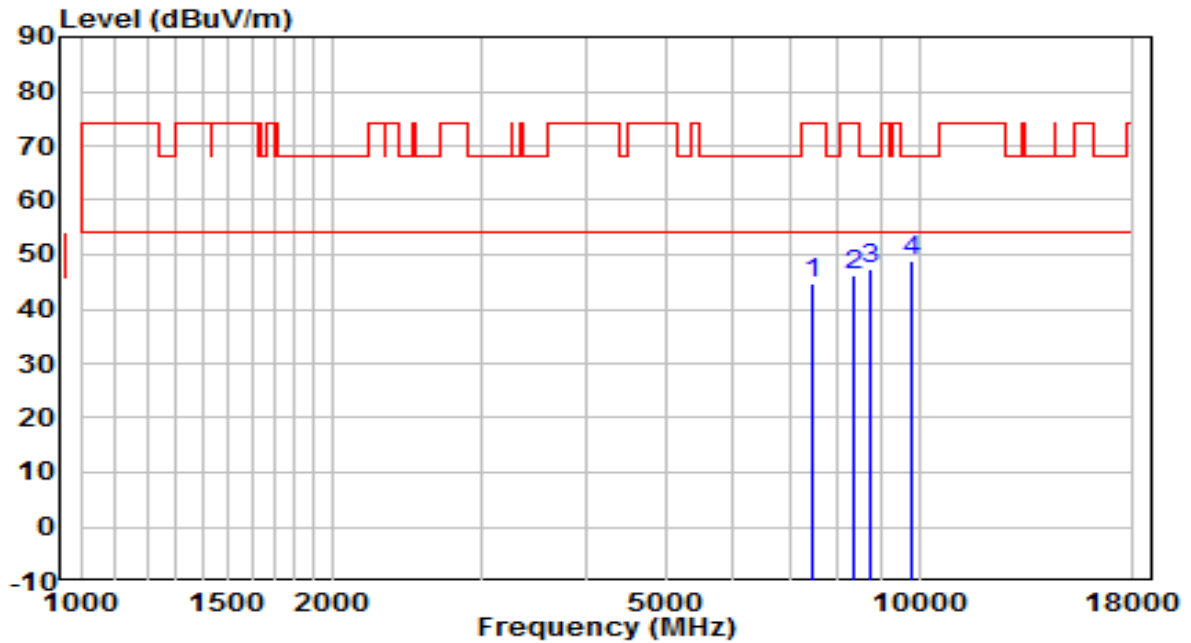


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7477.000	33.13	11.65	44.78	-29.22	74.00	Peak
2	8369.500	33.93	12.47	46.40	-27.60	74.00	Peak
3	8760.500	34.09	13.09	47.18	-21.02	68.20	Peak
4	* 9763.500	33.89	14.92	48.81	-19.39	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	120V/60Hz

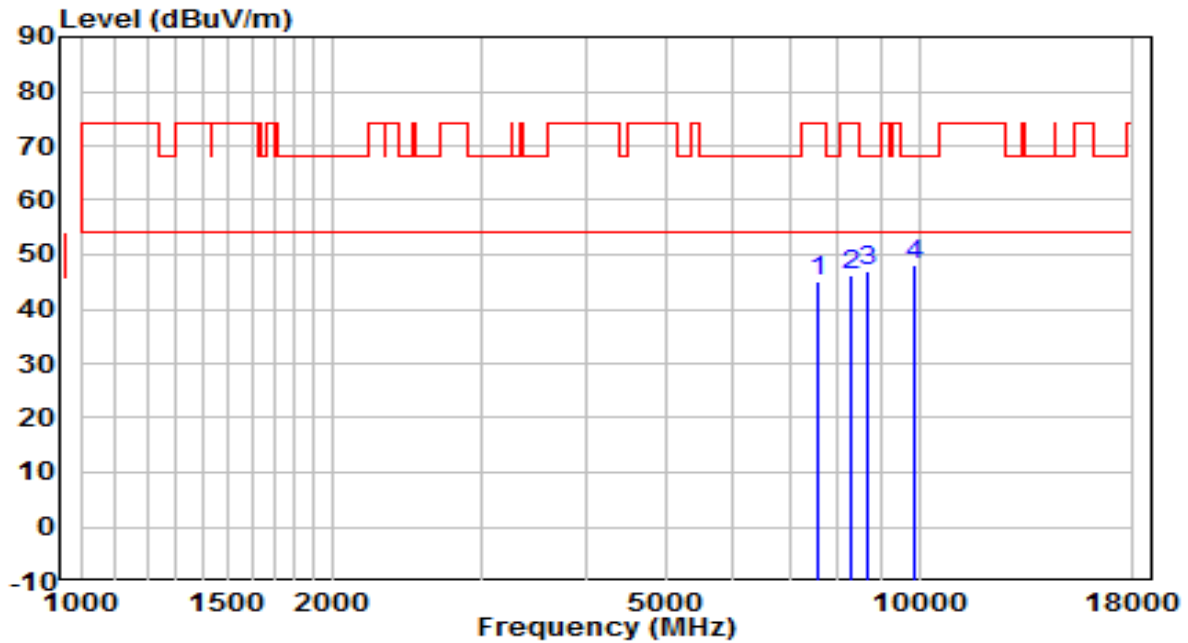


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7596.000	33.41	11.87	45.28	-28.72	74.00	Peak
2	8318.500	33.73	12.48	46.22	-27.78	74.00	Peak
3	8658.500	34.02	12.84	46.86	-21.34	68.20	Peak
4	* 9874.000	33.02	15.12	48.14	-20.06	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	120V/60Hz

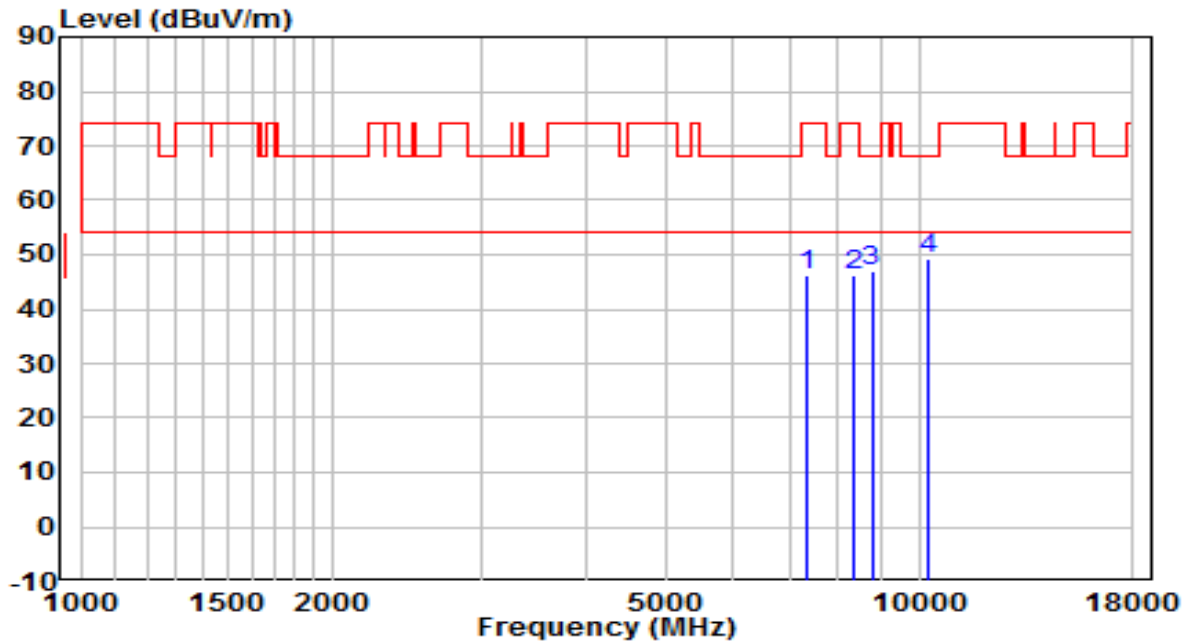


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7349.500	35.08	11.29	46.36	-27.64	74.00	Peak
2	8335.500	33.78	12.48	46.26	-27.74	74.00	Peak
3	8777.500	33.82	13.13	46.96	-21.24	68.20	Peak
4	* 10239.500	32.99	16.18	49.17	-19.03	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5550MHz	Test Voltage	120V/60Hz

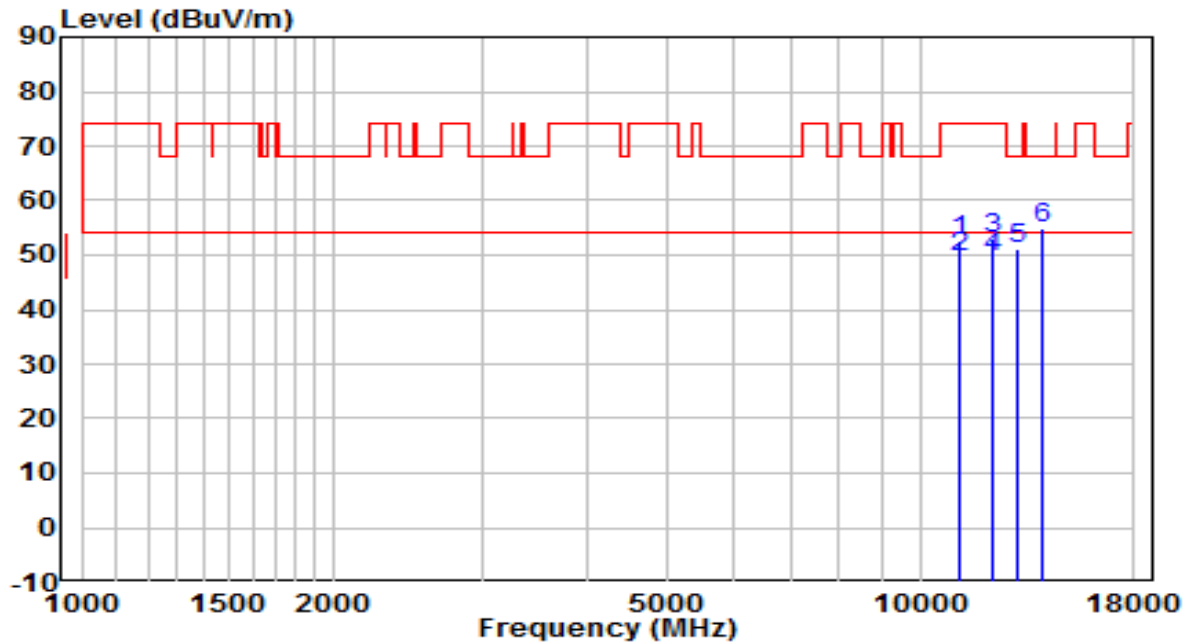


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	11106.500	34.56	17.92	52.49	-21.51	74.00	Peak
2	11106.500	31.53	17.92	49.45	-4.55	54.00	Average
3	12211.500	35.08	17.86	52.93	-21.07	74.00	Peak
4	* 12211.500	31.64	17.86	49.50	-4.50	54.00	Average
5	13044.500	31.66	19.40	51.06	-17.14	68.20	Peak
6	14022.000	33.50	21.51	55.01	-13.19	68.20	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5550MHz	Test Voltage	120V/60Hz

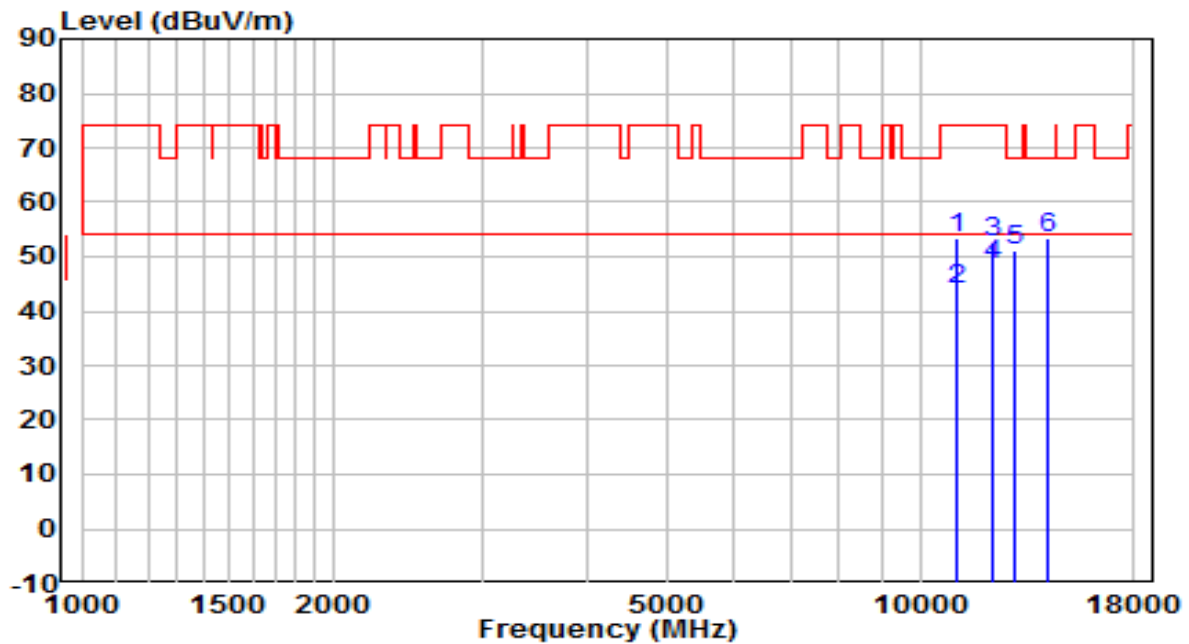


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	11089.500	35.42	17.90	53.32	-20.68	74.00	Peak
2	11089.500	25.99	17.90	43.89	-10.11	54.00	Average
3	12228.500	34.79	17.86	52.65	-21.35	74.00	Peak
4	* 12228.500	30.61	17.86	48.47	-5.53	54.00	Average
5	12925.500	31.88	19.08	50.96	-17.24	68.20	Peak
6	14200.500	31.91	21.45	53.36	-14.84	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	120V/60Hz

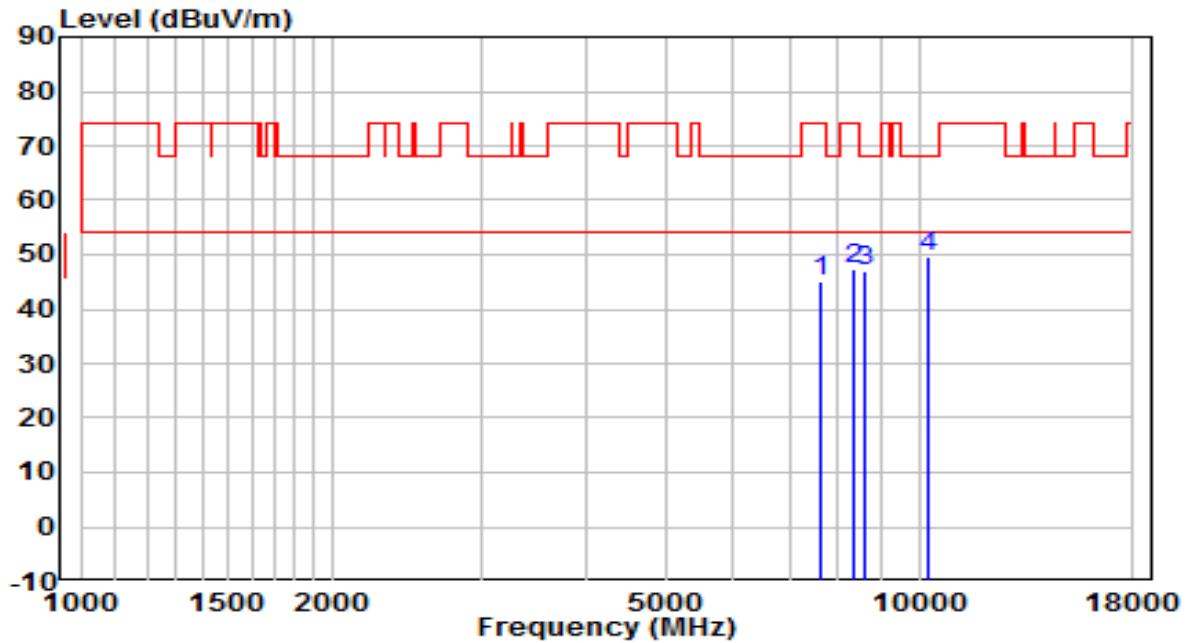


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7604.500	33.27	11.89	45.16	-28.84	74.00	Peak
2	8327.000	34.73	12.48	47.21	-26.79	74.00	Peak
3	8624.500	34.03	12.76	46.79	-21.41	68.20	Peak
4	* 10265.000	33.22	16.27	49.49	-18.71	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	120V/60Hz

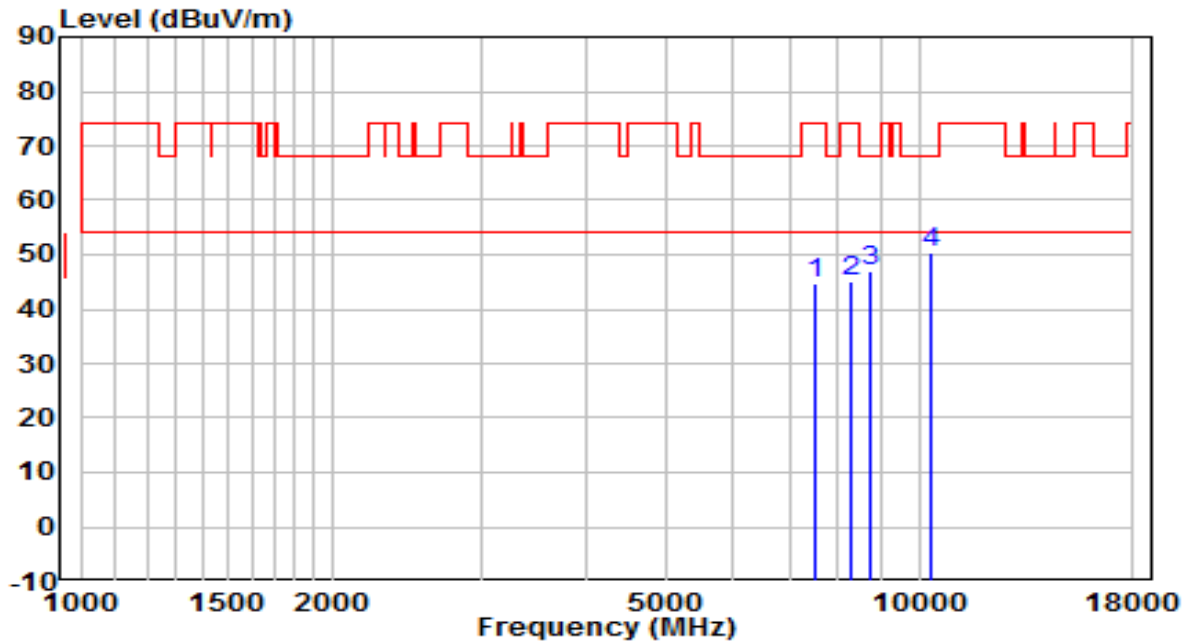


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7519.500	32.99	11.75	44.73	-29.27	74.00	Peak
2	8276.000	32.78	12.49	45.27	-28.73	74.00	Peak
3	8752.000	33.83	13.07	46.90	-21.30	68.20	Peak
4	* 10341.500	33.73	16.53	50.26	-17.94	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5710MHz	Test Voltage	120V/60Hz

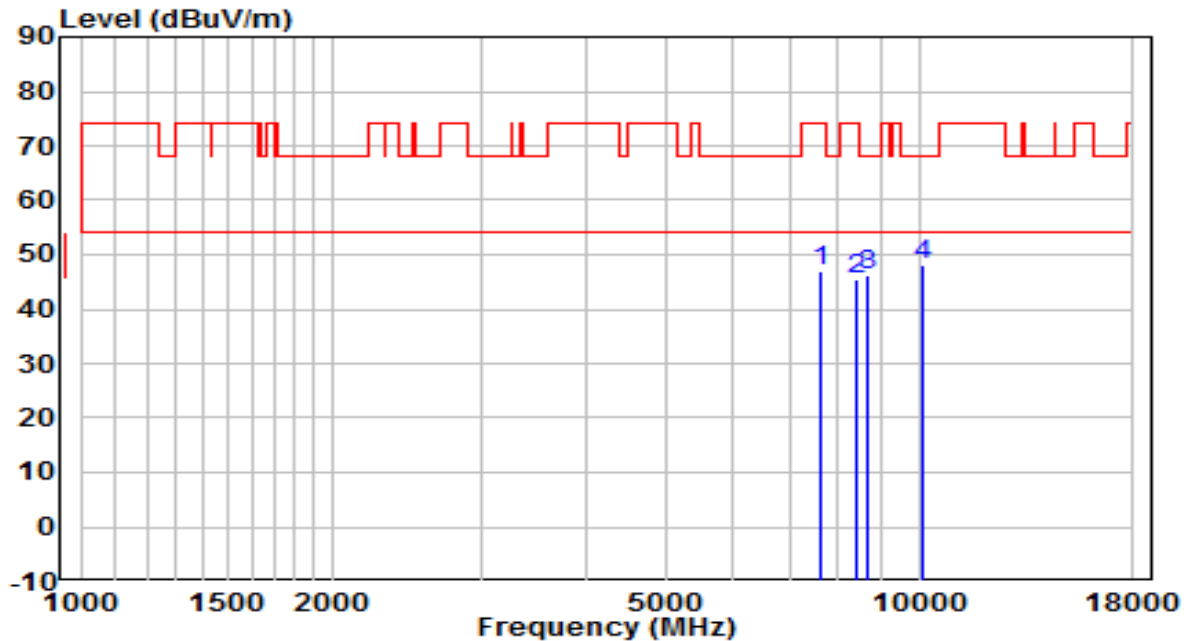


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7613.000	35.26	11.90	47.16	-26.84	74.00	Peak
2	8429.000	33.11	12.47	45.58	-28.42	74.00	Peak
3	8658.500	33.57	12.84	46.41	-21.79	68.20	Peak
4	* 10095.000	32.24	15.68	47.93	-20.27	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5710MHz	Test Voltage	120V/60Hz

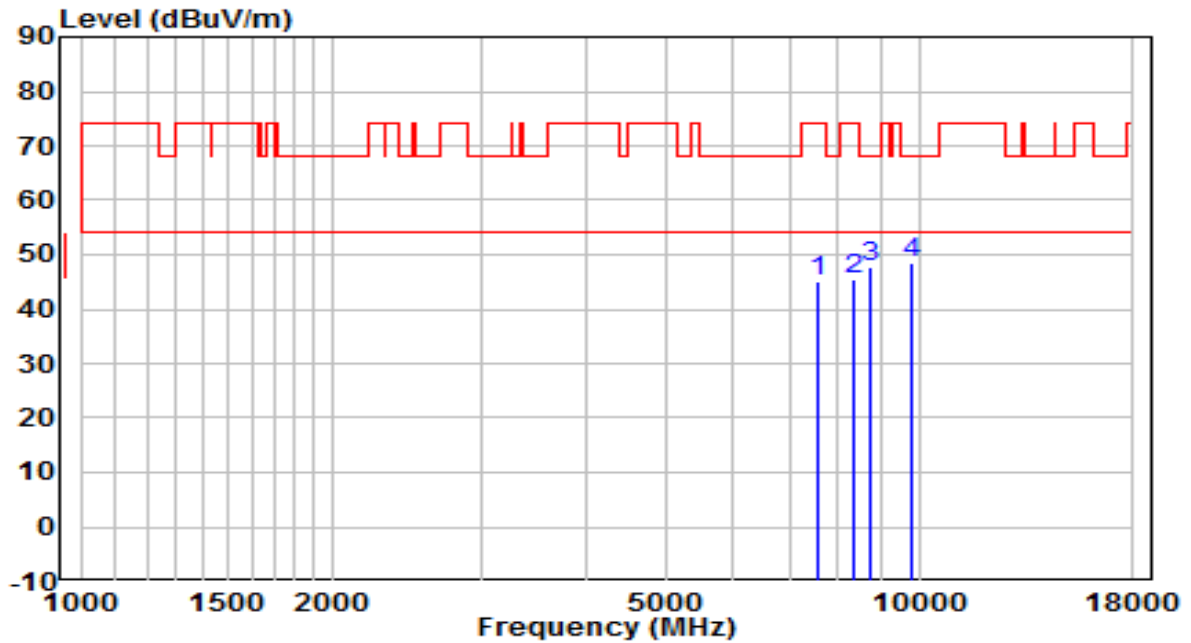


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7587.500	33.37	11.86	45.23	-28.77	74.00	Peak
2	8344.000	32.99	12.48	45.47	-28.53	74.00	Peak
3	8752.000	34.49	13.07	47.56	-20.64	68.20	Peak
4	* 9823.000	33.29	15.03	48.32	-19.88	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	120V/60Hz

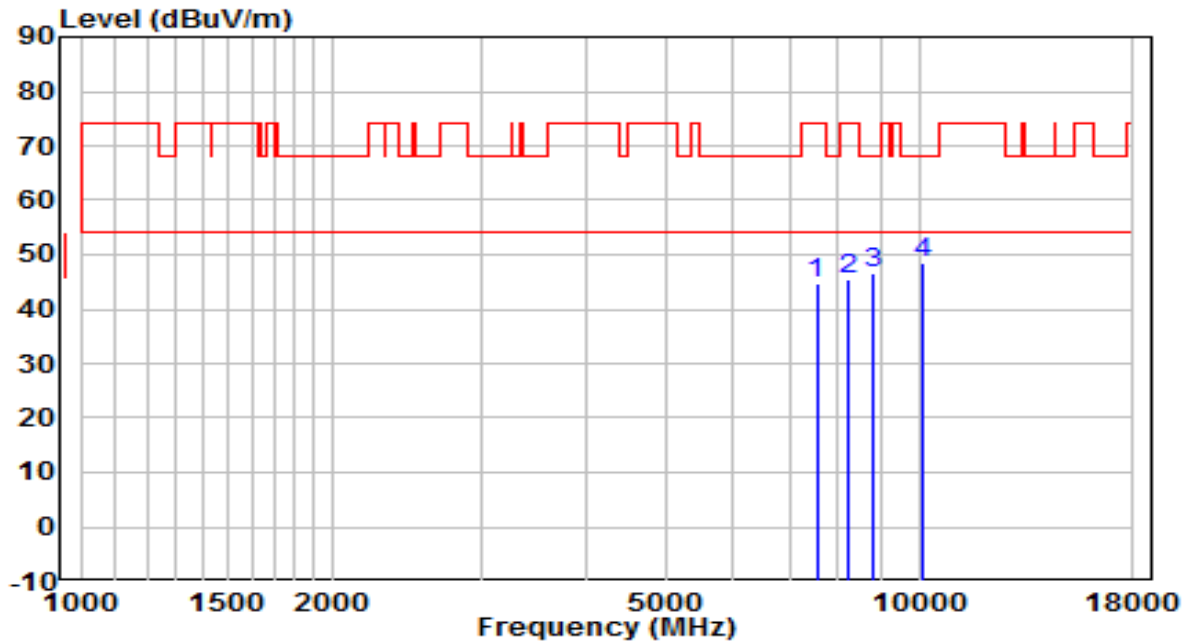


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7545.000	33.09	11.79	44.88	-29.12	74.00	Peak
2	8208.000	32.87	12.50	45.37	-28.63	74.00	Peak
3	8837.000	33.17	13.28	46.45	-21.75	68.20	Peak
4	* 10095.000	32.69	15.68	48.38	-19.82	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	120V/60Hz

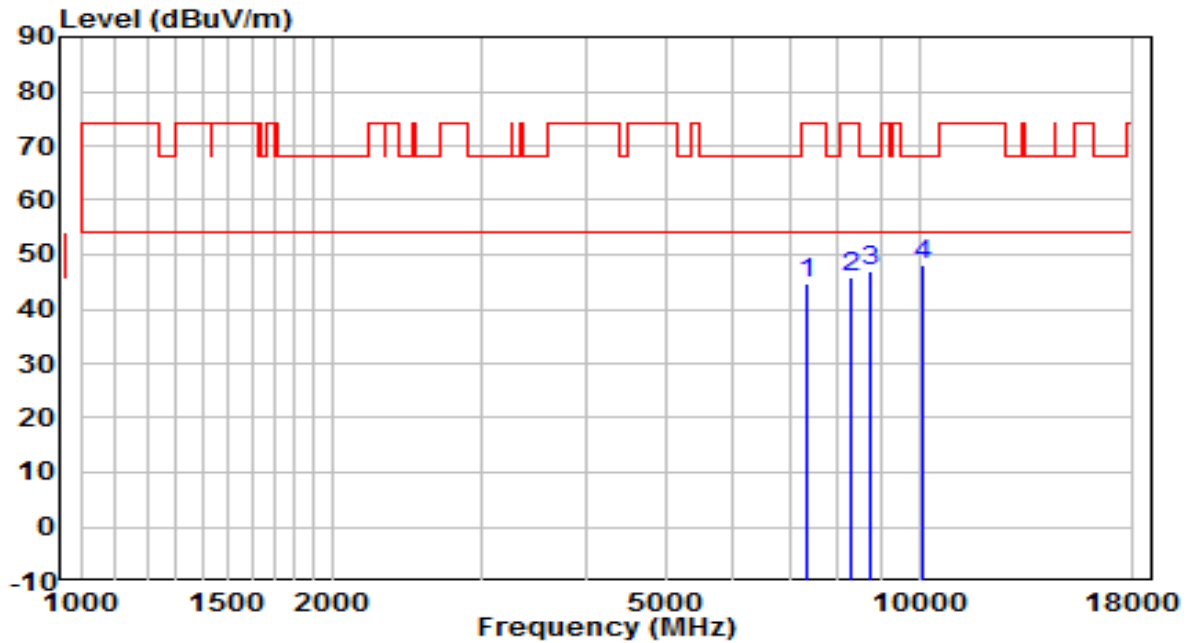


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7341.000	33.34	11.27	44.61	-29.39	74.00	Peak
2	8310.000	33.25	12.48	45.73	-28.27	74.00	Peak
3	8735.000	33.91	13.03	46.94	-21.26	68.20	Peak
4	* 10103.500	32.21	15.71	47.93	-20.27	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	120V/60Hz

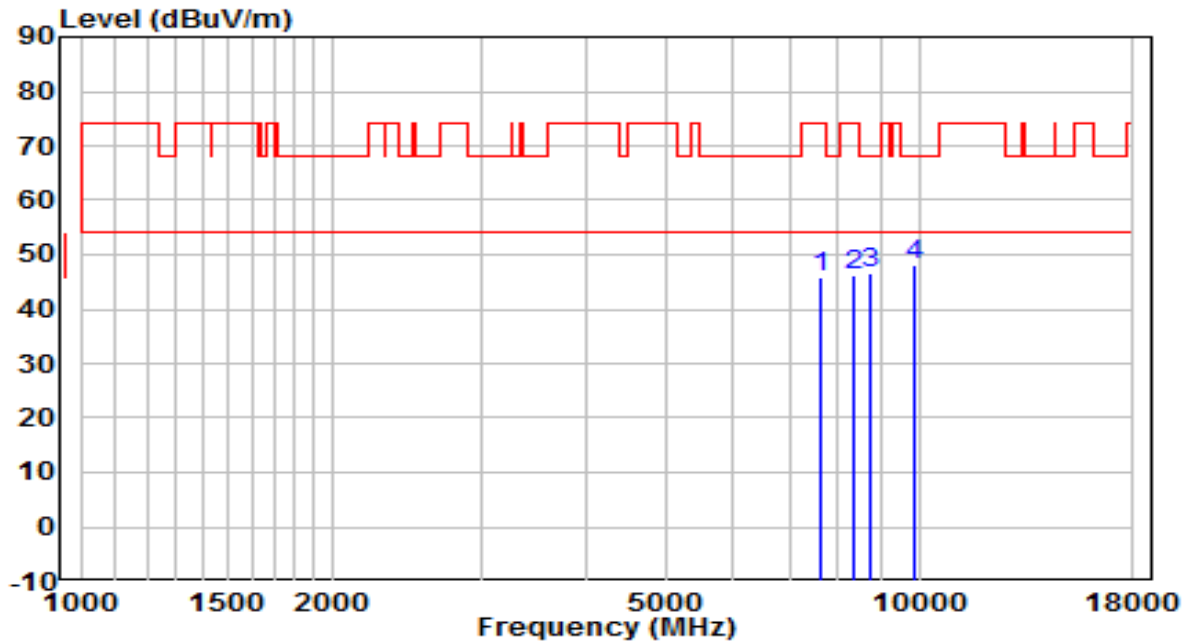


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7621.500	34.00	11.91	45.92	-28.08	74.00	Peak
2	8361.000	33.89	12.48	46.36	-27.64	74.00	Peak
3	8735.000	33.48	13.03	46.51	-21.69	68.20	Peak
4	* 9840.000	33.01	15.06	48.07	-20.13	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5795MHz	Test Voltage	120V/60Hz

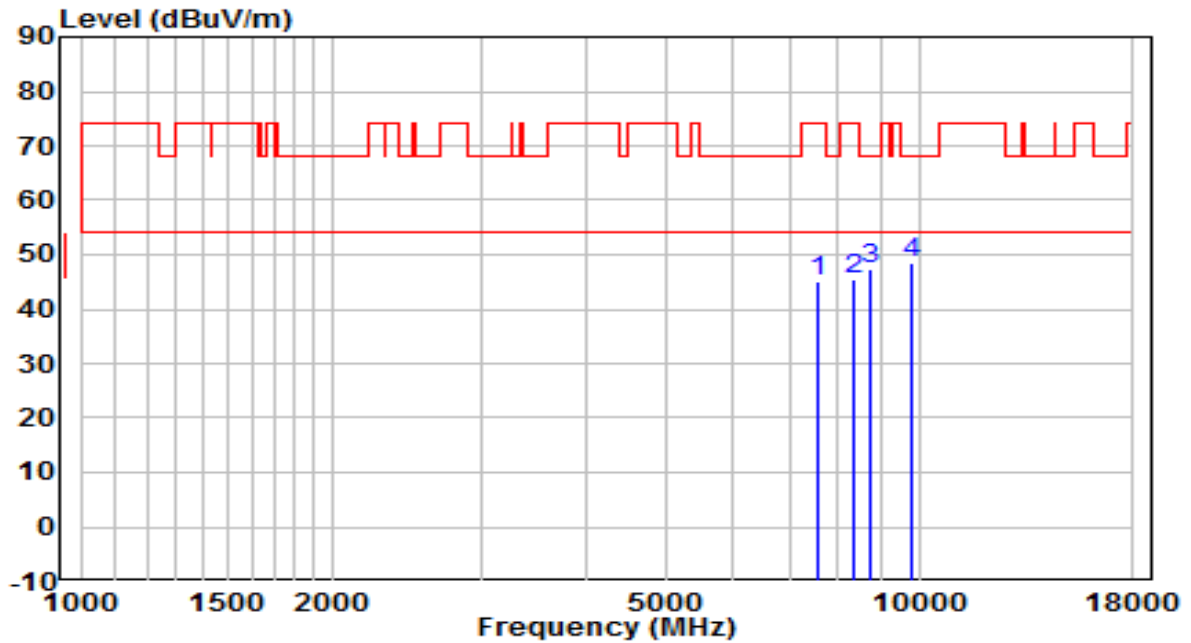


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7596.000	33.28	11.87	45.15	-28.85	74.00	Peak
2	8352.500	33.10	12.48	45.58	-28.42	74.00	Peak
3	8760.500	34.25	13.09	47.35	-20.85	68.20	Peak
4	* 9814.500	33.36	15.01	48.37	-19.83	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

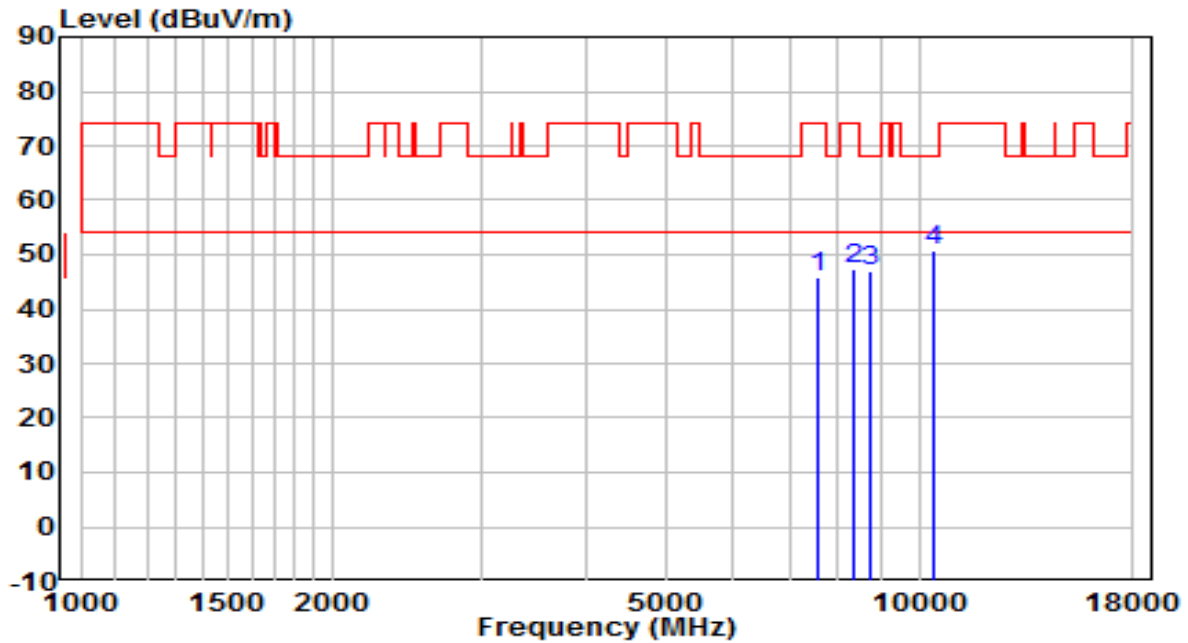


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7570.500	33.97	11.83	45.80	-28.20	74.00	Peak
2	8361.000	34.90	12.48	47.38	-26.62	74.00	Peak
3	8718.000	34.06	12.99	47.05	-21.15	68.20	Peak
4	* 10418.000	33.92	16.79	50.71	-17.49	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

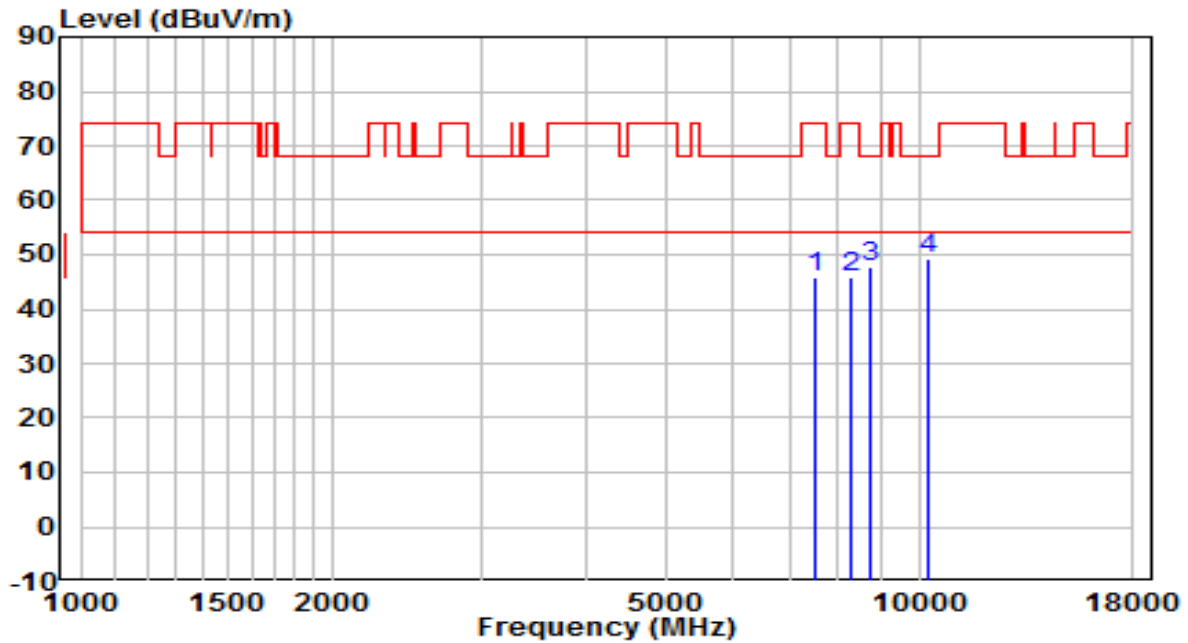


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7528.000	33.99	11.76	45.75	-28.25	74.00	Peak
2	8293.000	33.23	12.49	45.72	-28.28	74.00	Peak
3	8718.000	34.62	12.99	47.61	-20.59	68.20	Peak
4	* 10222.500	33.08	16.12	49.20	-19.00	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	120V/60Hz

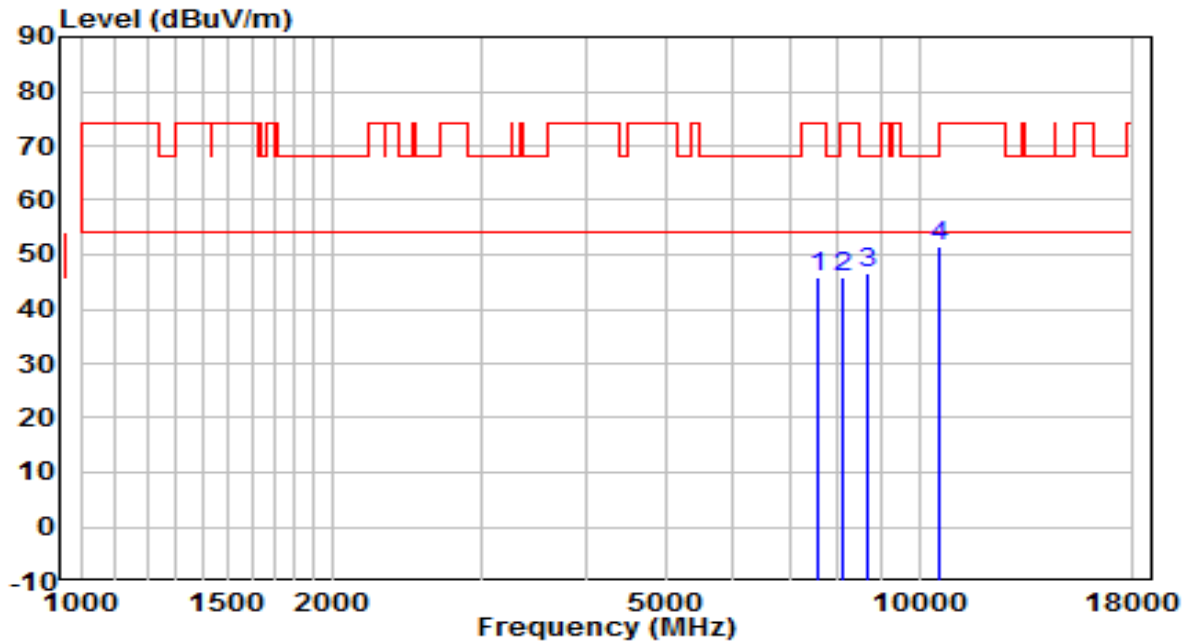


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7553.500	34.22	11.80	46.02	-27.98	74.00	Peak
2	8114.500	33.27	12.51	45.79	-28.21	74.00	Peak
3	8692.500	33.67	12.93	46.59	-21.61	68.20	Peak
4	* 10579.500	34.43	17.18	51.61	-16.59	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5290MHz	Test Voltage	120V/60Hz

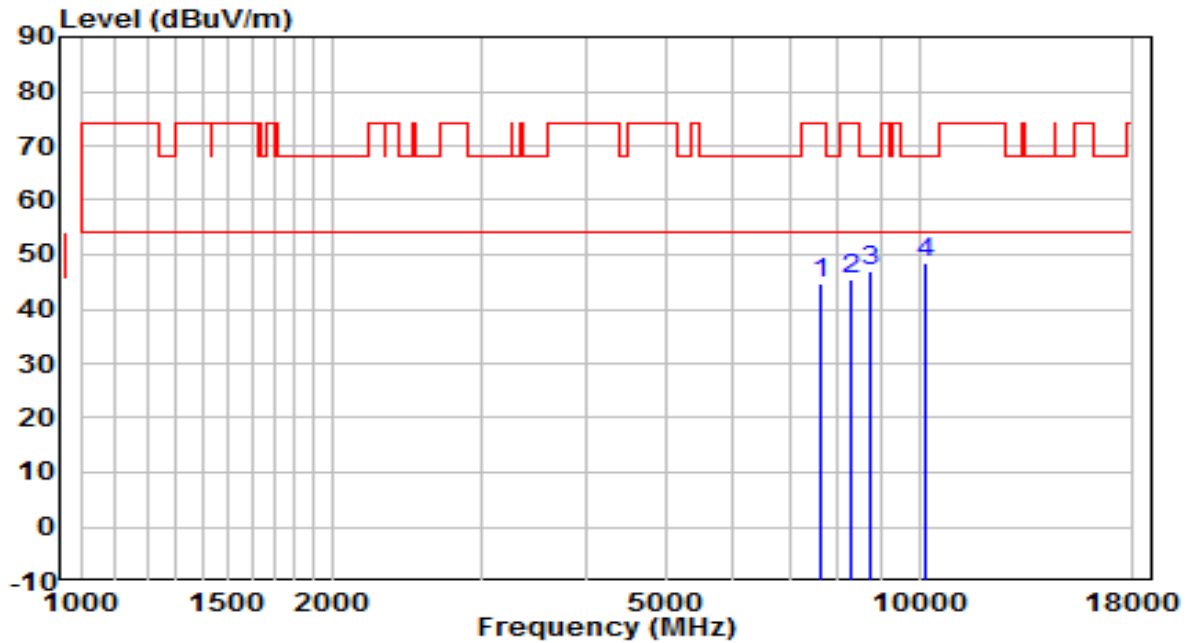


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7613.000	32.87	11.90	44.76	-29.24	74.00	Peak
2	8301.500	33.01	12.48	45.49	-28.51	74.00	Peak
3	8769.000	34.01	13.11	47.13	-21.07	68.20	Peak
4	* 10205.500	32.62	16.06	48.68	-19.52	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	120V/60Hz

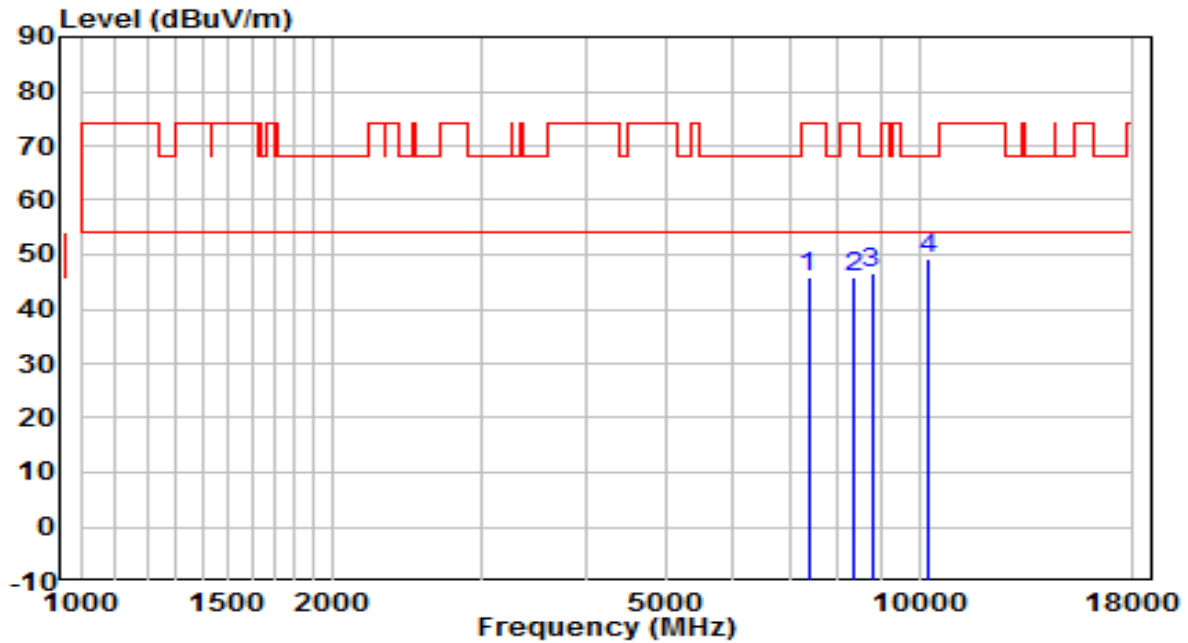


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7375.000	34.40	11.36	45.77	-28.23	74.00	Peak
2	8344.000	33.27	12.48	45.75	-28.25	74.00	Peak
3	8777.500	33.48	13.13	46.62	-21.58	68.20	Peak
4	* 10231.000	32.98	16.15	49.13	-19.07	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5530MHz	Test Voltage	120V/60Hz

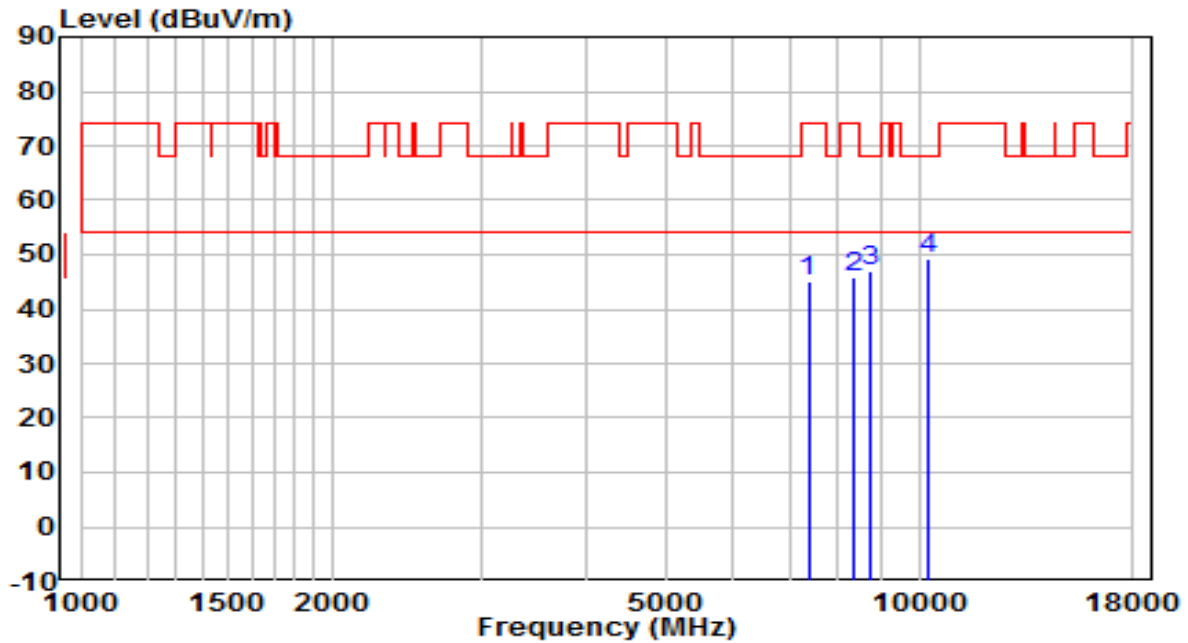


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7375.000	33.65	11.36	45.01	-28.99	74.00	Peak
2	8352.500	33.39	12.48	45.86	-28.14	74.00	Peak
3	8760.500	33.73	13.09	46.82	-21.38	68.20	Peak
4	* 10256.500	33.13	16.24	49.37	-18.83	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz	Test Voltage	120V/60Hz

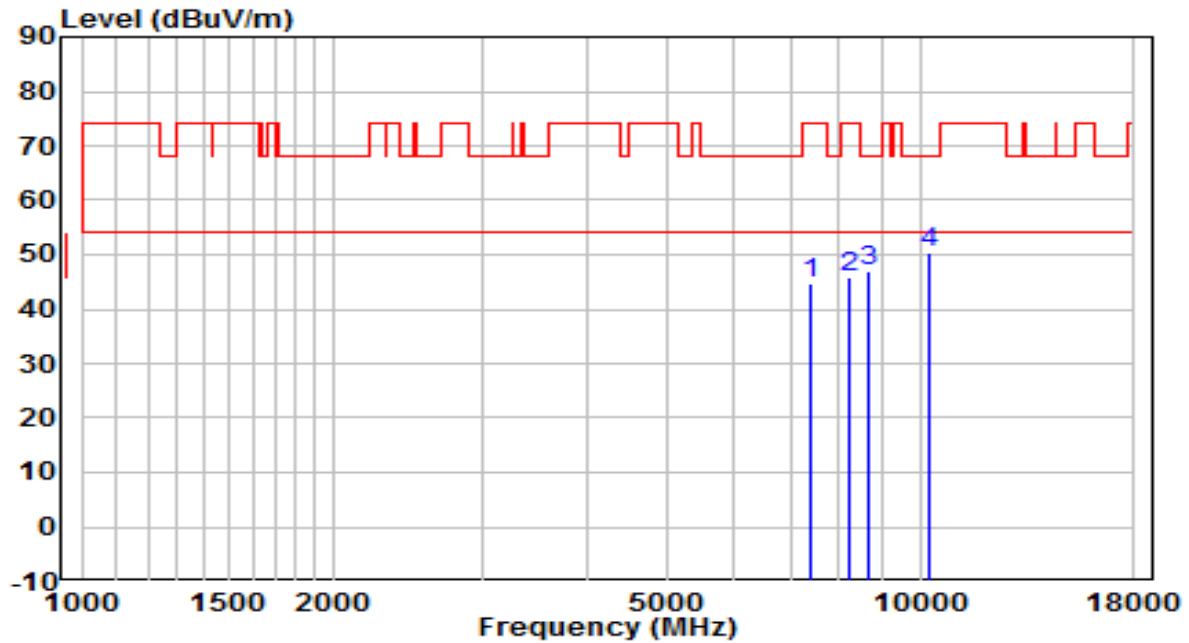


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7392.000	33.24	11.41	44.65	-29.35	74.00	Peak
2	8250.500	33.25	12.49	45.74	-28.26	74.00	Peak
3	8658.500	34.12	12.84	46.96	-21.24	68.20	Peak
4	* 10273.500	34.25	16.30	50.55	-17.65	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5610MHz	Test Voltage	120V/60Hz

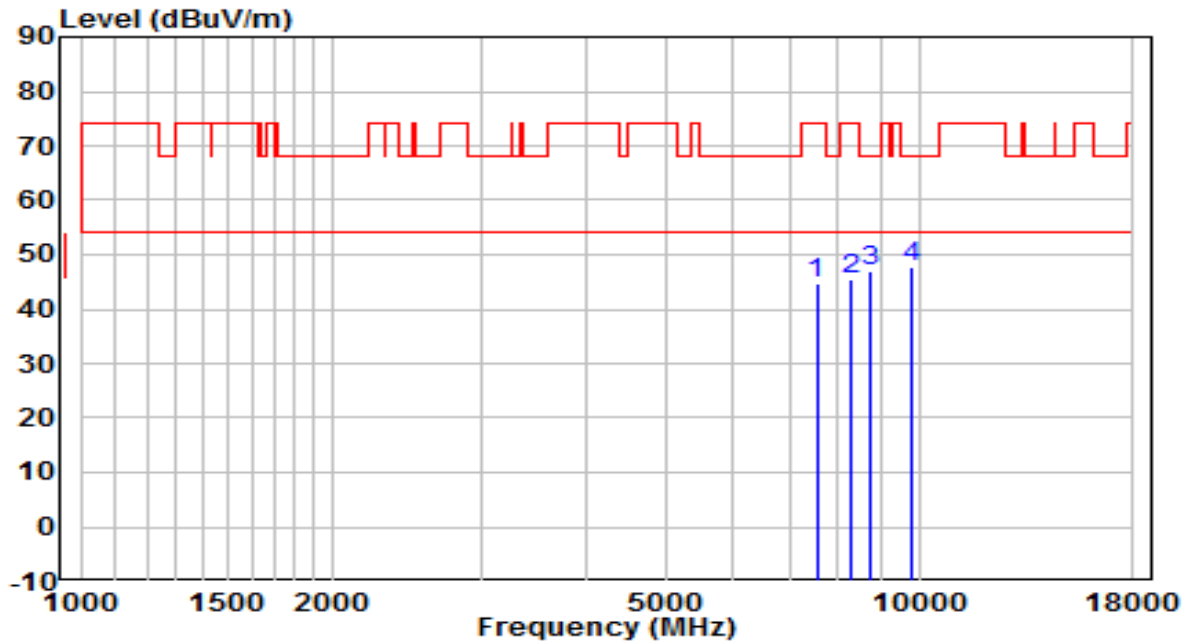


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7545.000	33.01	11.79	44.80	-29.20	74.00	Peak
2	8301.500	32.82	12.48	45.31	-28.69	74.00	Peak
3	8760.500	33.95	13.09	47.04	-21.16	68.20	Peak
4	* 9814.500	32.73	15.01	47.74	-20.46	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5690MHz	Test Voltage	120V/60Hz

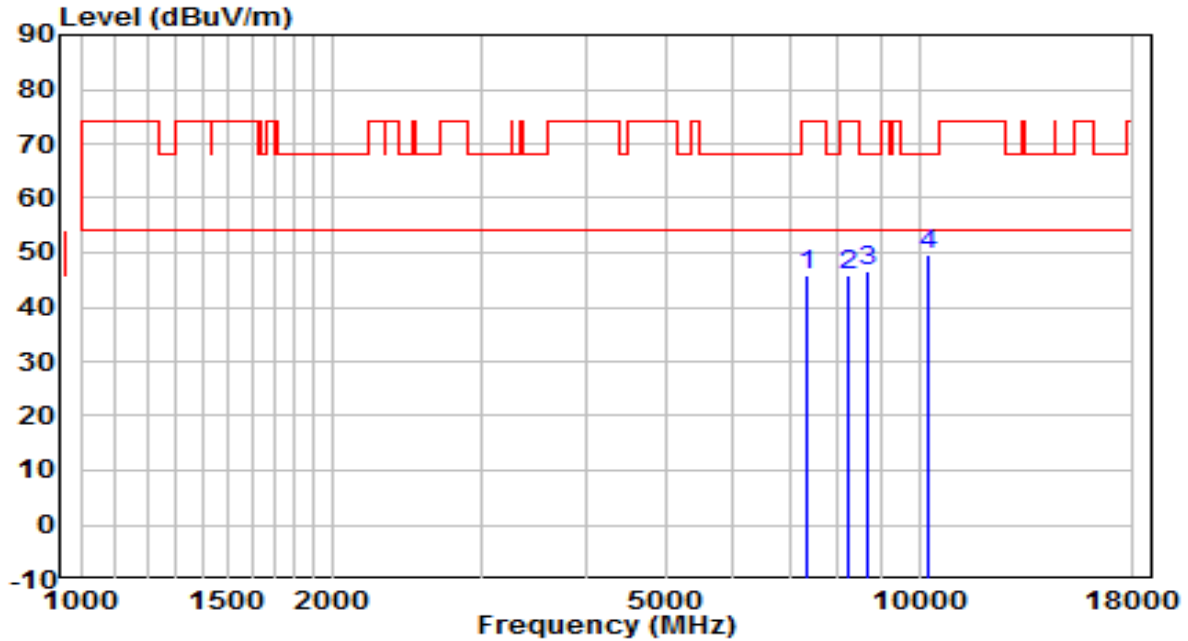


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7349.500	34.72	11.29	46.01	-27.99	74.00	Peak
2	8216.500	33.27	12.50	45.77	-28.23	74.00	Peak
3	8658.500	33.68	12.84	46.52	-21.68	68.20	Peak
4	* 10256.500	33.30	16.24	49.54	-18.66	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5690MHz	Test Voltage	120V/60Hz

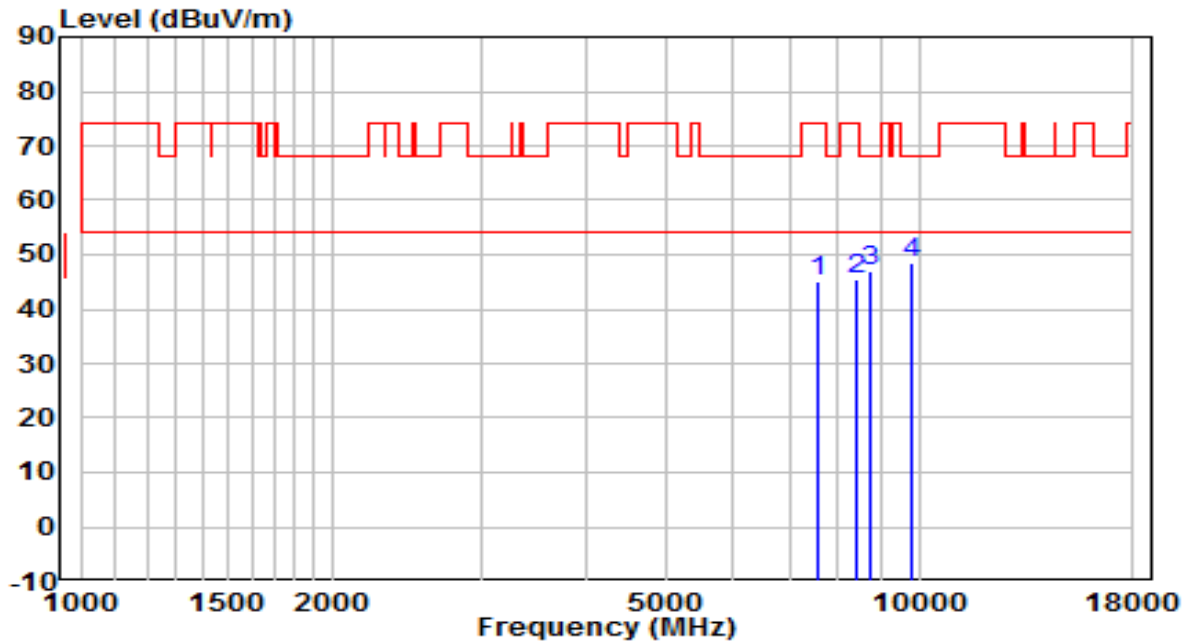


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7570.500	33.33	11.83	45.16	-28.84	74.00	Peak
2	8403.500	33.18	12.47	45.65	-28.35	74.00	Peak
3	8752.000	33.77	13.07	46.84	-21.36	68.20	Peak
4	* 9823.000	33.61	15.03	48.64	-19.56	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	120V/60Hz

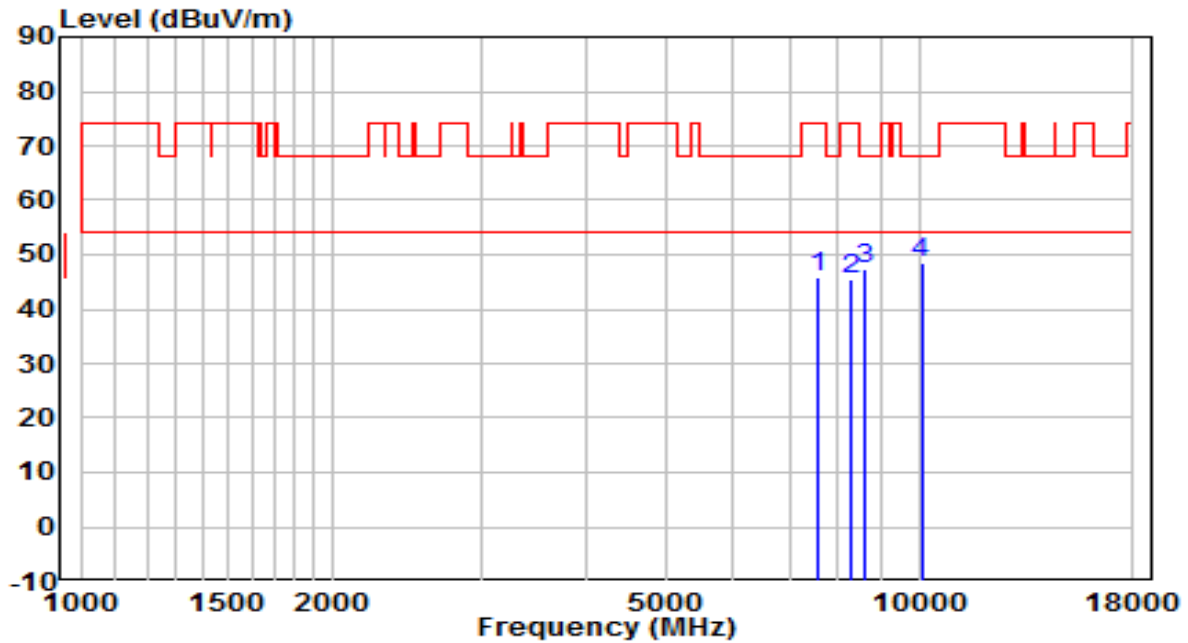


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7587.500	34.03	11.86	45.89	-28.11	74.00	Peak
2	8310.000	32.95	12.48	45.43	-28.57	74.00	Peak
3	8616.000	34.46	12.74	47.20	-21.00	68.20	Peak
4	* 10061.000	32.76	15.57	48.33	-19.87	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-09
Factor	BBHA 9120D	Temp. / Humidity	20.2°C/35%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	120V/60Hz

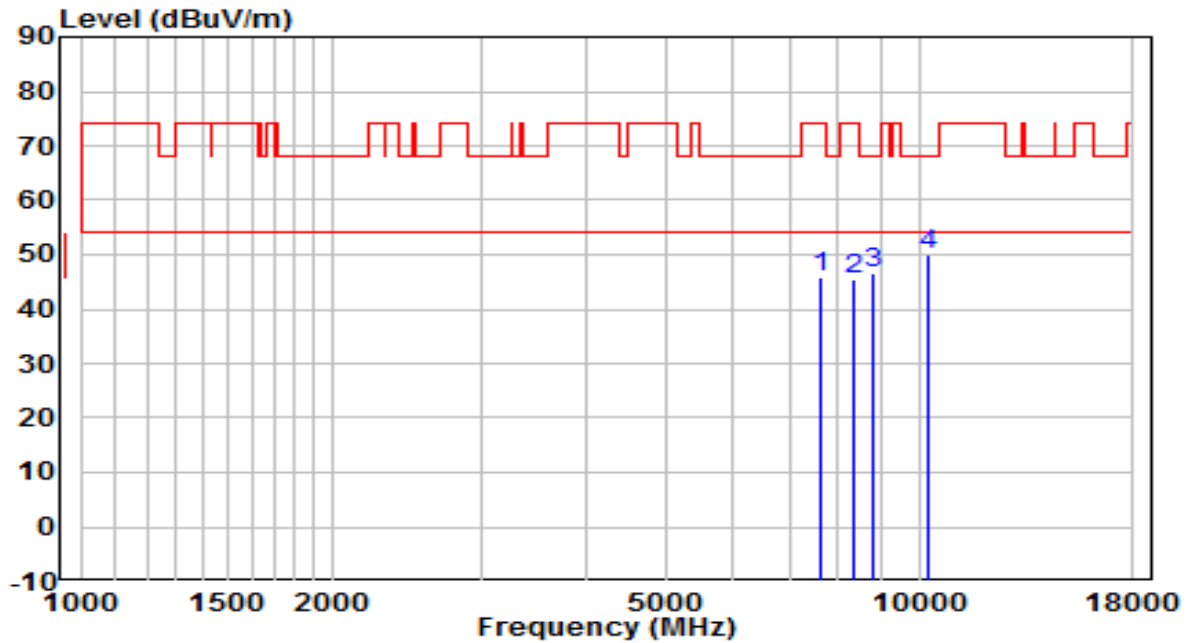


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	7604.500	33.81	11.89	45.69	-28.31	74.00	Peak
2	8327.000	33.09	12.48	45.58	-28.42	74.00	Peak
3	8786.000	33.63	13.16	46.79	-21.41	68.20	Peak
4	* 10282.000	33.74	16.32	50.06	-18.14	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Type B Filter Configuration

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	120V/60Hz

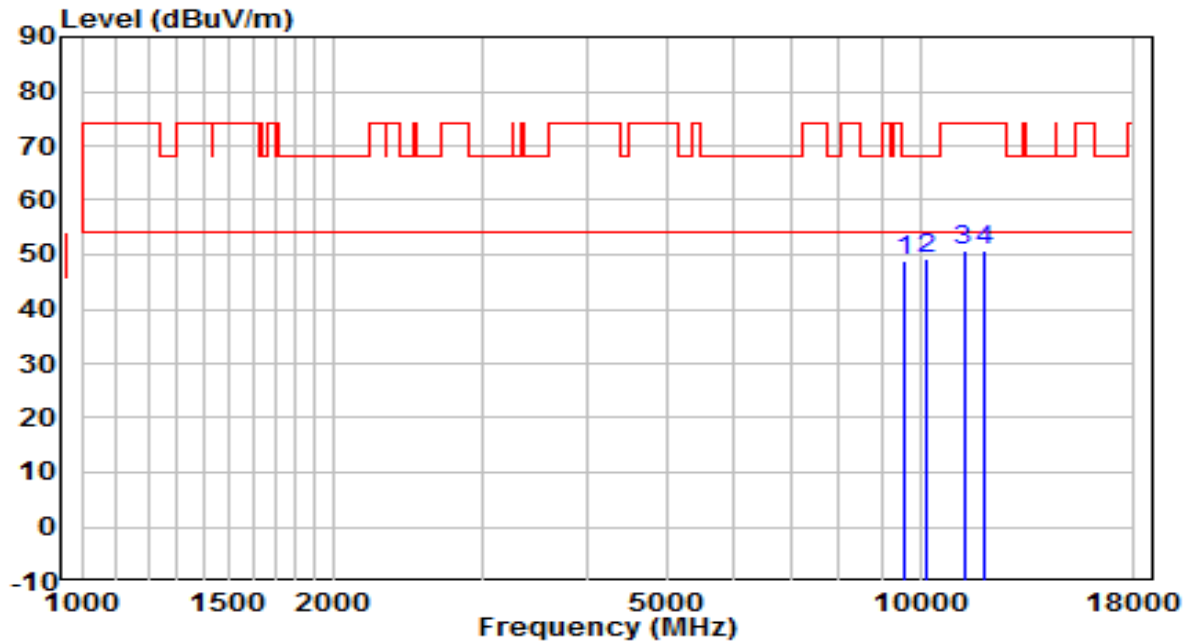


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9593.500	34.27	14.60	48.86	-19.34	68.20	Peak
2	* 10205.500	33.31	16.06	49.37	-18.83	68.20	Peak
3	11268.000	32.72	18.14	50.86	-23.14	74.00	Peak
4	11888.500	32.89	17.96	50.85	-23.15	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	120V/60Hz

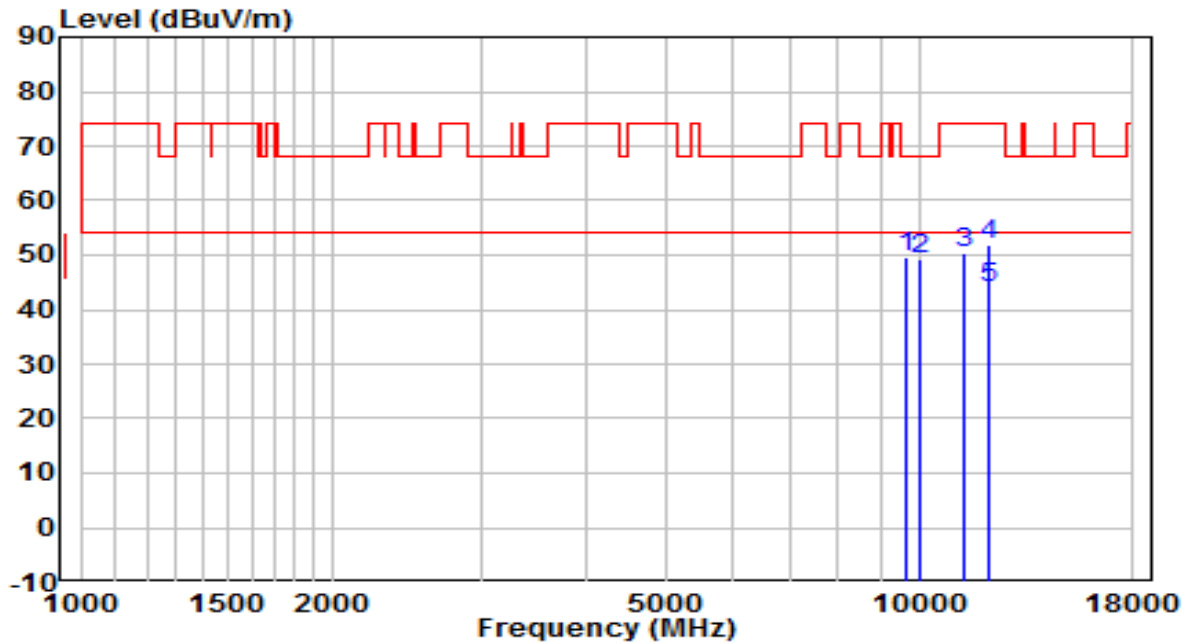


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9661.500	34.84	14.72	49.56	-18.64	68.20	Peak
2	10035.500	33.78	15.48	49.26	-18.94	68.20	Peak
3	11310.500	32.02	18.20	50.22	-23.78	74.00	Peak
4	12109.500	33.93	17.84	51.77	-22.23	74.00	Peak
5	* 12109.500	26.13	17.84	43.97	-10.03	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	120V/60Hz

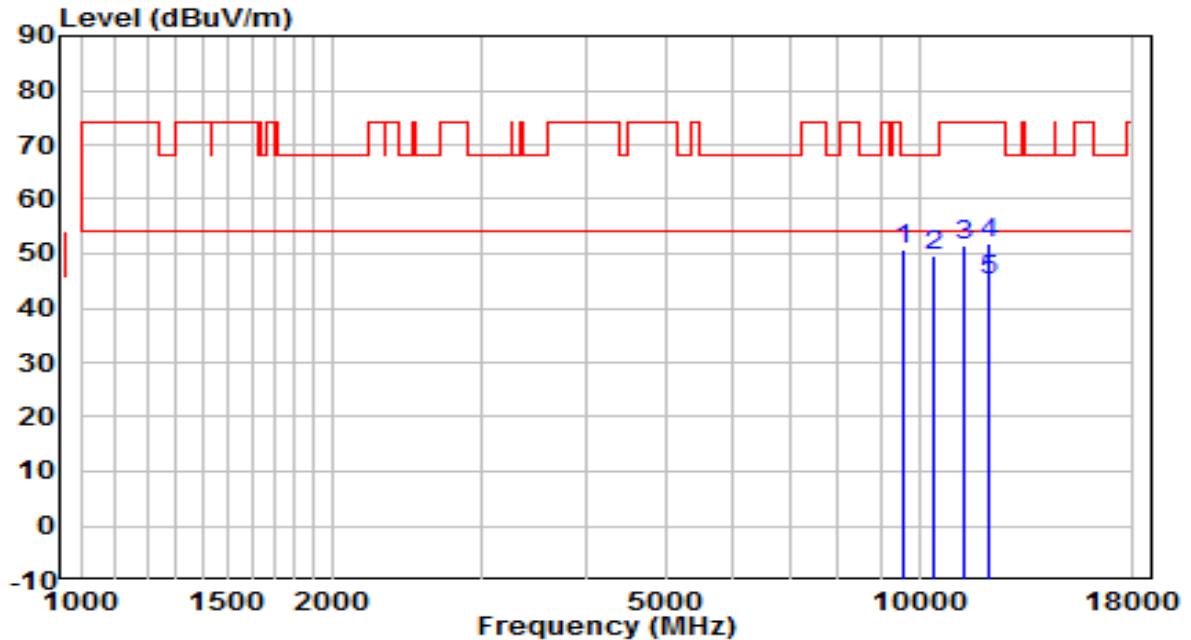


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	9568.000	36.18	14.55	50.73	-17.47	68.20	Peak
2	10375.500	32.96	16.64	49.60	-18.60	68.20	Peak
3	11285.000	33.51	18.16	51.67	-22.33	74.00	Peak
4	12075.500	34.23	17.83	52.06	-21.94	74.00	Peak
5 *	12075.500	27.16	17.83	44.99	-9.01	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	120V/60Hz

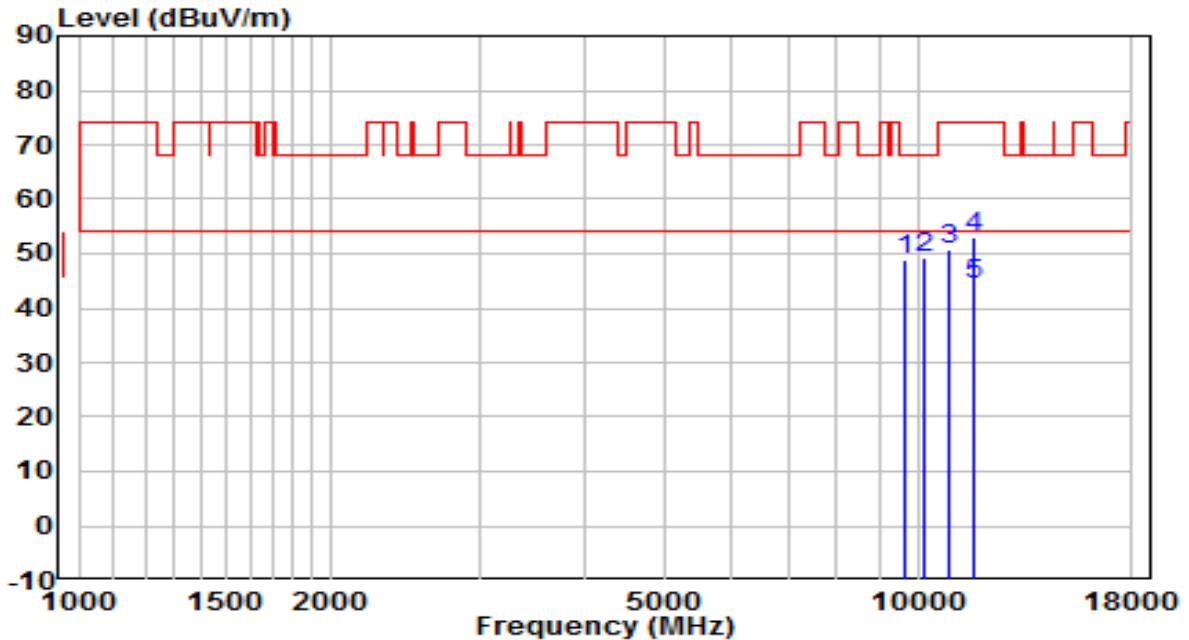


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9644.500	34.24	14.69	48.93	-19.27	68.20	Peak
2	10163.000	33.37	15.92	49.29	-18.91	68.20	Peak
3	10894.000	33.24	17.63	50.87	-23.13	74.00	Peak
4	11642.000	34.69	18.27	52.96	-21.04	74.00	Peak
5	* 11642.000	26.17	18.27	44.44	-9.56	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120V/60Hz

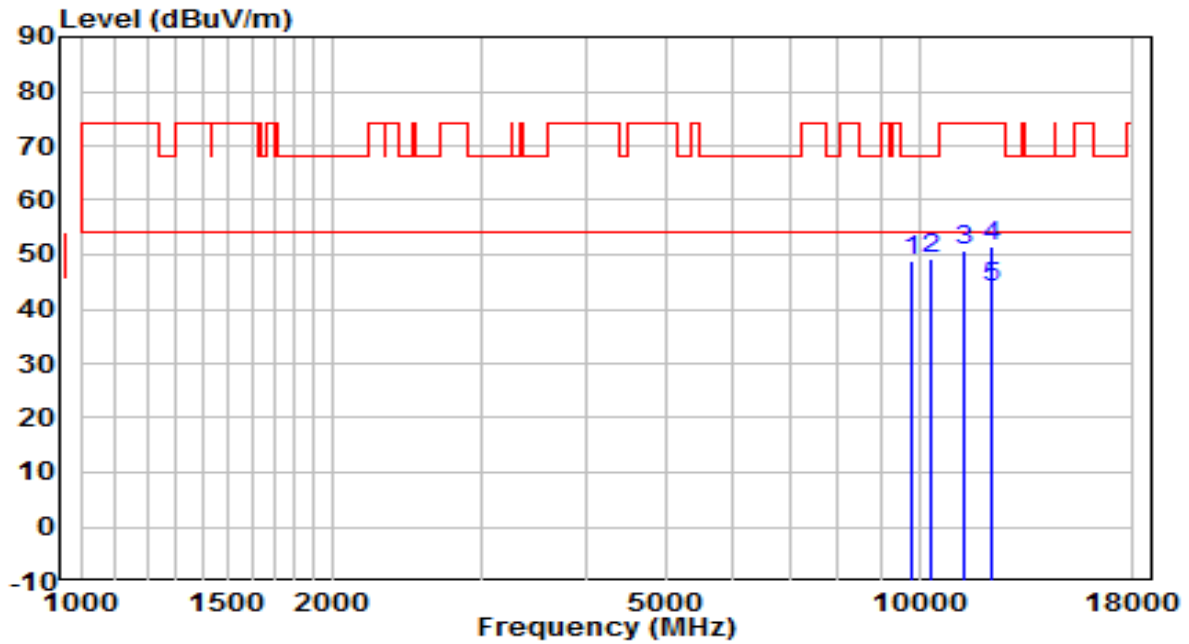


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9797.500	34.01	14.98	48.99	-19.21	68.20	Peak
2	10299.000	32.72	16.38	49.10	-19.10	68.20	Peak
3	11293.500	32.52	18.17	50.69	-23.31	74.00	Peak
4	12194.500	33.49	17.85	51.34	-22.66	74.00	Peak
5	* 12194.500	26.03	17.85	43.88	-10.12	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120V/60Hz

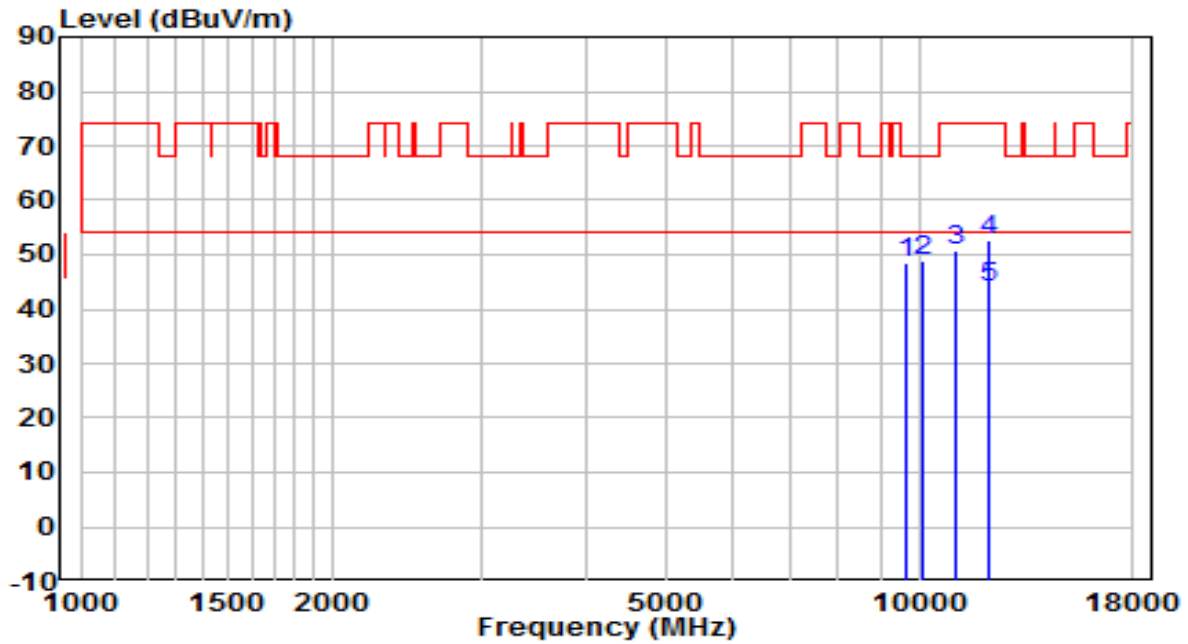


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9644.500	33.93	14.69	48.62	-19.58	68.20	Peak
2	10078.000	33.13	15.63	48.75	-19.45	68.20	Peak
3	11081.000	32.93	17.89	50.82	-23.18	74.00	Peak
4	12101.000	34.77	17.84	52.61	-21.39	74.00	Peak
5	* 12101.000	26.18	17.84	44.02	-9.98	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	120V/60Hz

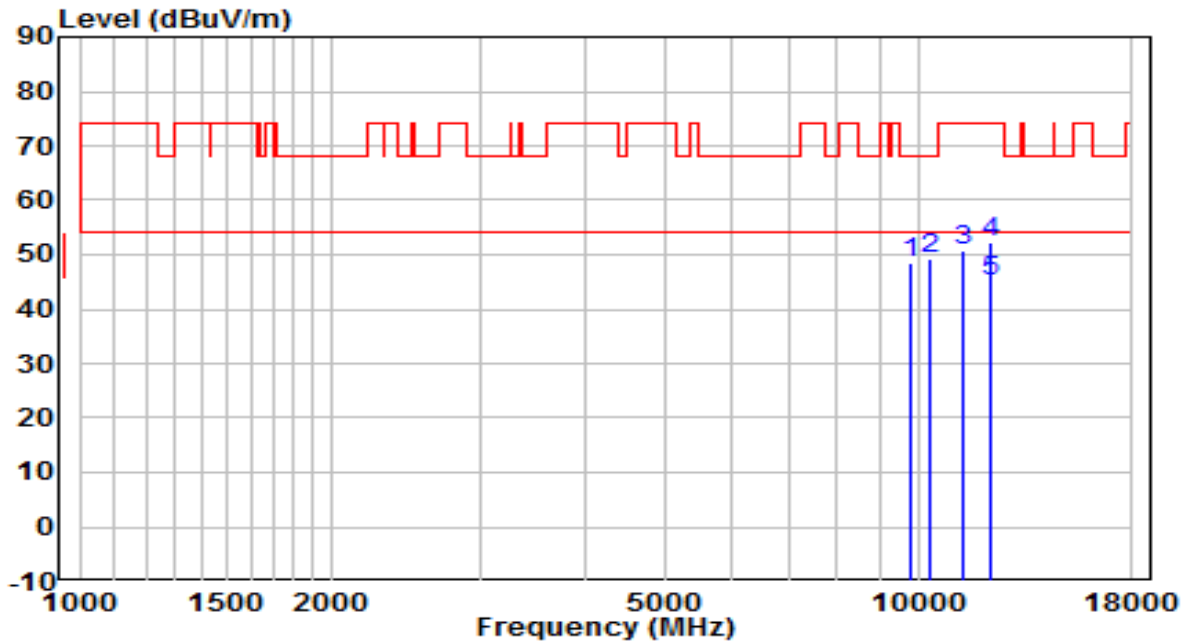


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9797.500	33.53	14.98	48.50	-19.70	68.20	Peak
2	10350.000	32.61	16.56	49.17	-19.03	68.20	Peak
3	11285.000	32.66	18.16	50.82	-23.18	74.00	Peak
4	12203.000	34.43	17.85	52.28	-21.72	74.00	Peak
5	* 12203.000	27.11	17.85	44.96	-9.04	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	120V/60Hz

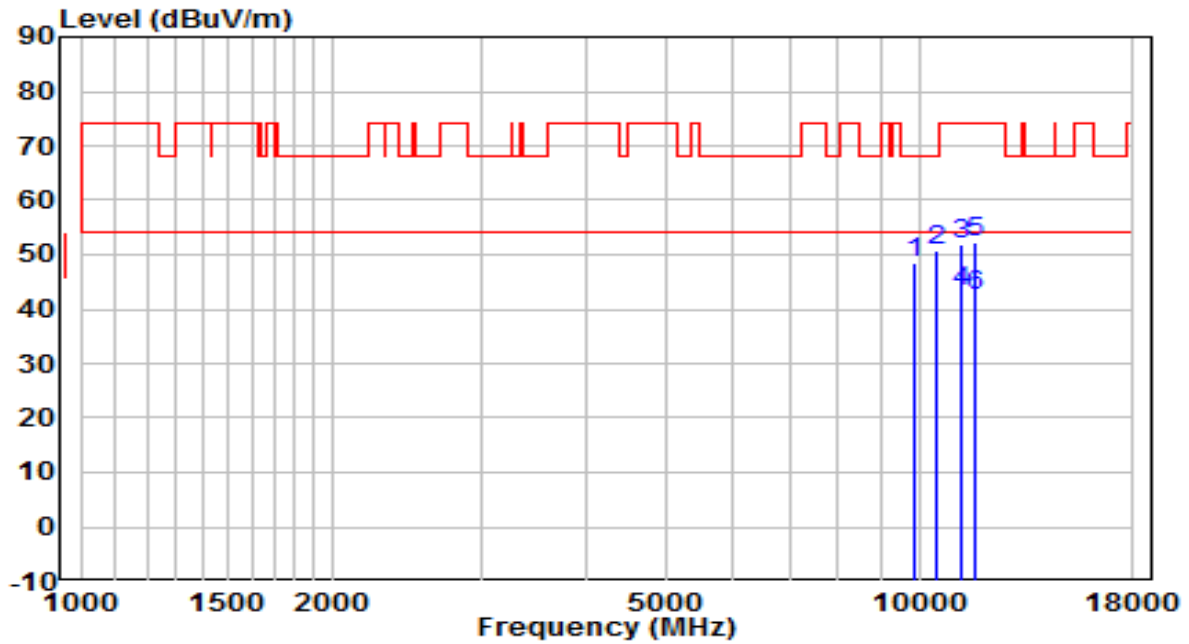


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9840.000	33.34	15.06	48.40	-19.80	68.20	Peak
2	10460.500	33.82	16.93	50.76	-17.44	68.20	Peak
3	11191.500	33.74	18.04	51.78	-22.22	74.00	Peak
4	* 11191.500	25.16	18.04	43.20	-10.80	54.00	Average
5	11642.000	33.93	18.27	52.20	-21.80	74.00	Peak
6	11642.000	24.11	18.27	42.38	-11.62	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	120V/60Hz

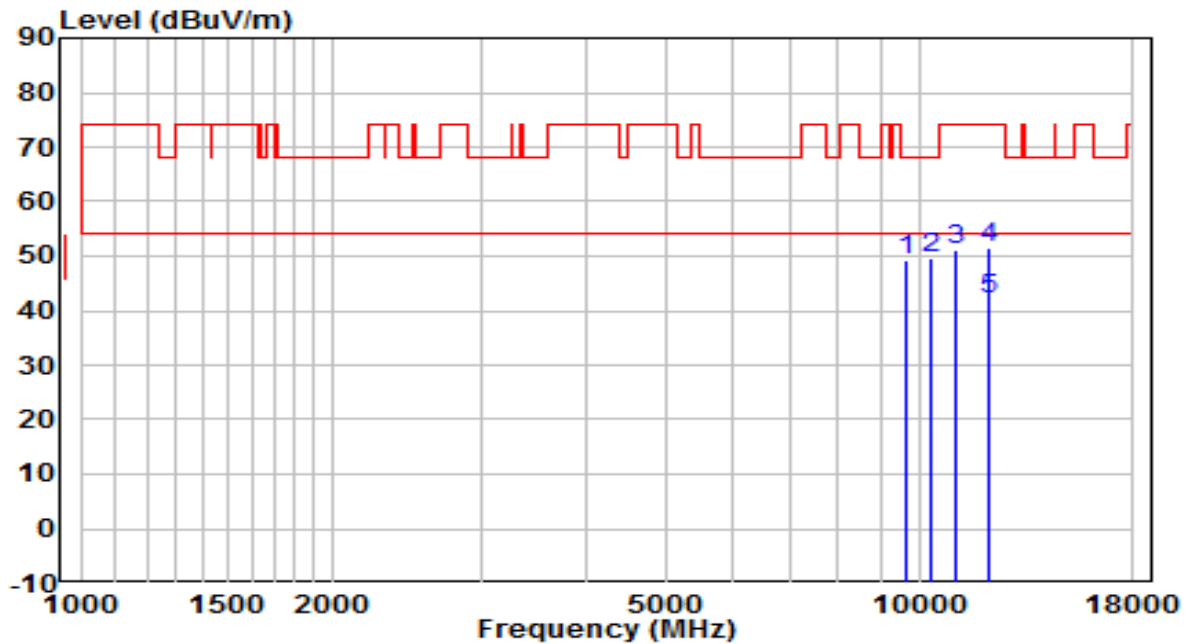


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9644.500	34.59	14.69	49.28	-18.92	68.20	Peak
2	10333.000	32.94	16.50	49.44	-18.76	68.20	Peak
3	11072.500	33.16	17.88	51.03	-22.97	74.00	Peak
4	12084.000	33.73	17.83	51.57	-22.43	74.00	Peak
5	* 12084.000	24.24	17.83	42.07	-11.93	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	120V/60Hz

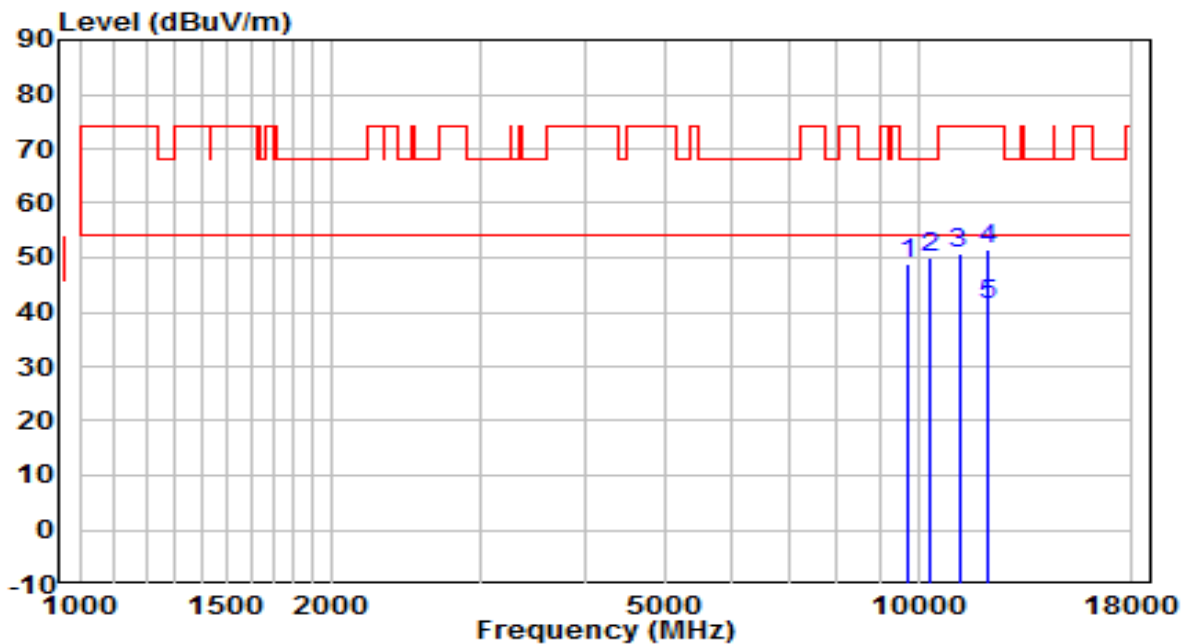


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9755.000	33.86	14.90	48.76	-19.44	68.20	Peak
2	10358.500	33.55	16.59	50.14	-18.06	68.20	Peak
3	11183.000	32.86	18.03	50.88	-23.12	74.00	Peak
4	12092.500	33.72	17.84	51.56	-22.44	74.00	Peak
5	* 12092.500	23.51	17.84	41.35	-12.65	54.00	Average

Note:

1. "*" means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	120V/60Hz

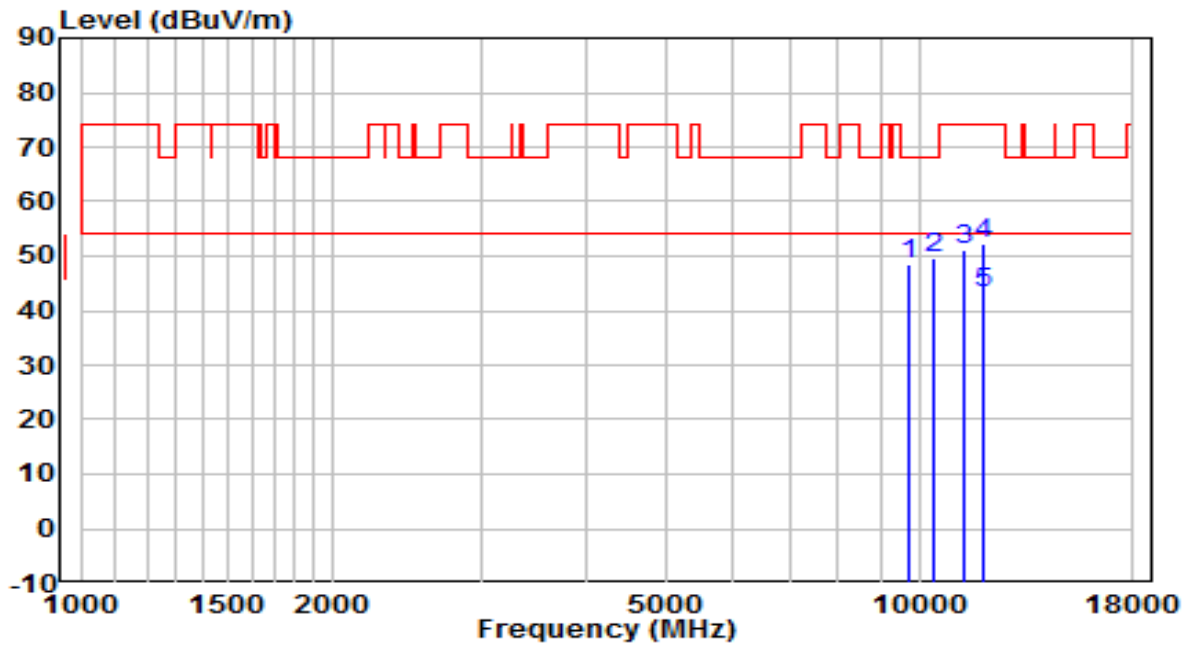


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9704.000	33.60	14.80	48.40	-19.80	68.20	Peak
2	10418.000	32.91	16.79	49.70	-18.50	68.20	Peak
3	11285.000	32.85	18.16	51.01	-22.99	74.00	Peak
4	11897.000	34.26	17.95	52.21	-21.79	74.00	Peak
5	* 11897.000	25.13	17.95	43.08	-10.92	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	120V/60Hz

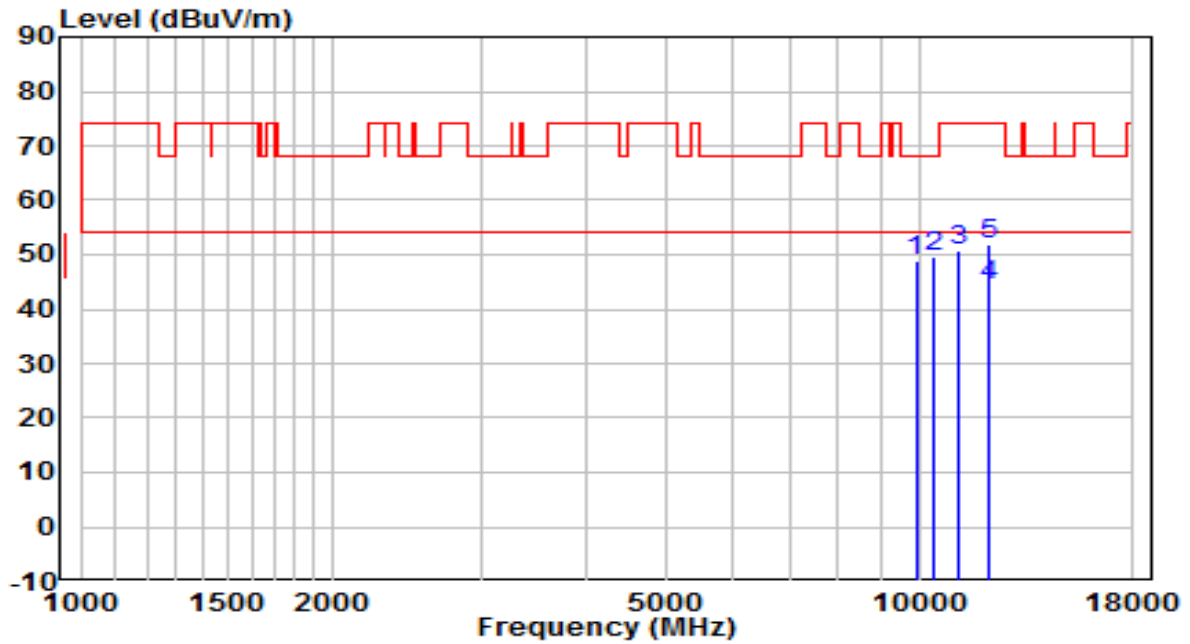


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9908.000	33.79	15.19	48.98	-19.22	68.20	Peak
2	10426.500	32.74	16.82	49.55	-18.65	68.20	Peak
3	11115.000	32.94	17.93	50.87	-23.13	74.00	Peak
4	* 12143.000	26.64	17.84	44.48	-9.52	54.00	Average
5	12143.500	34.09	17.84	51.93	-22.07	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

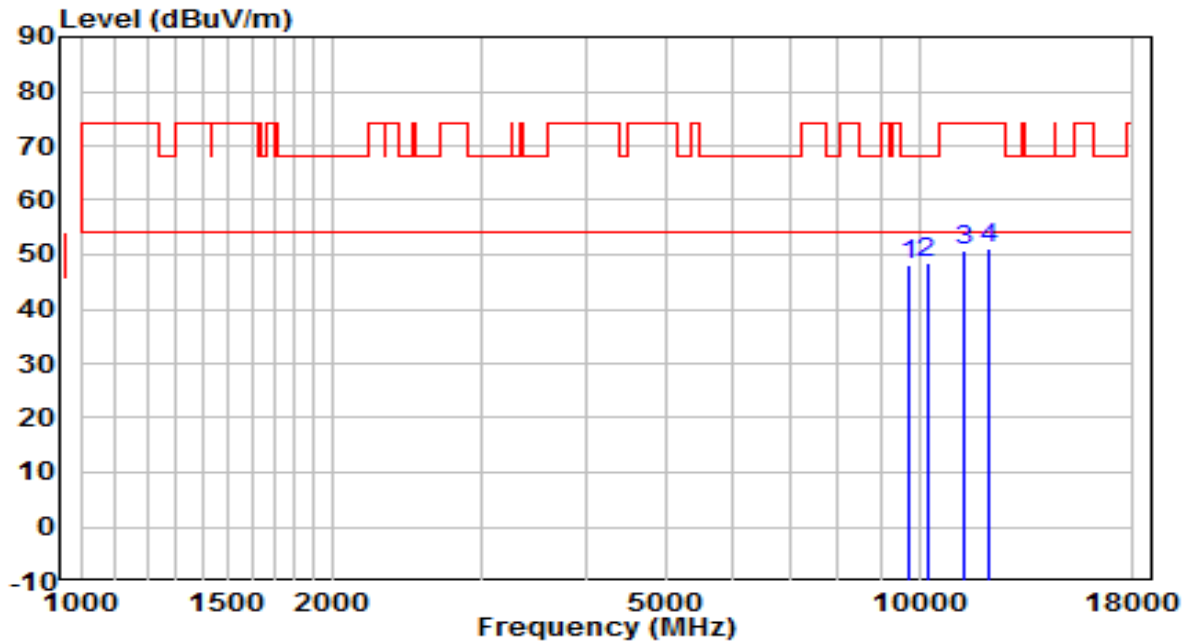


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9738.000	33.32	14.87	48.19	-20.01	68.20	Peak
2	* 10214.000	32.58	16.09	48.67	-19.53	68.20	Peak
3	11276.500	32.68	18.15	50.83	-23.17	74.00	Peak
4	12109.500	33.16	17.84	51.00	-23.00	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

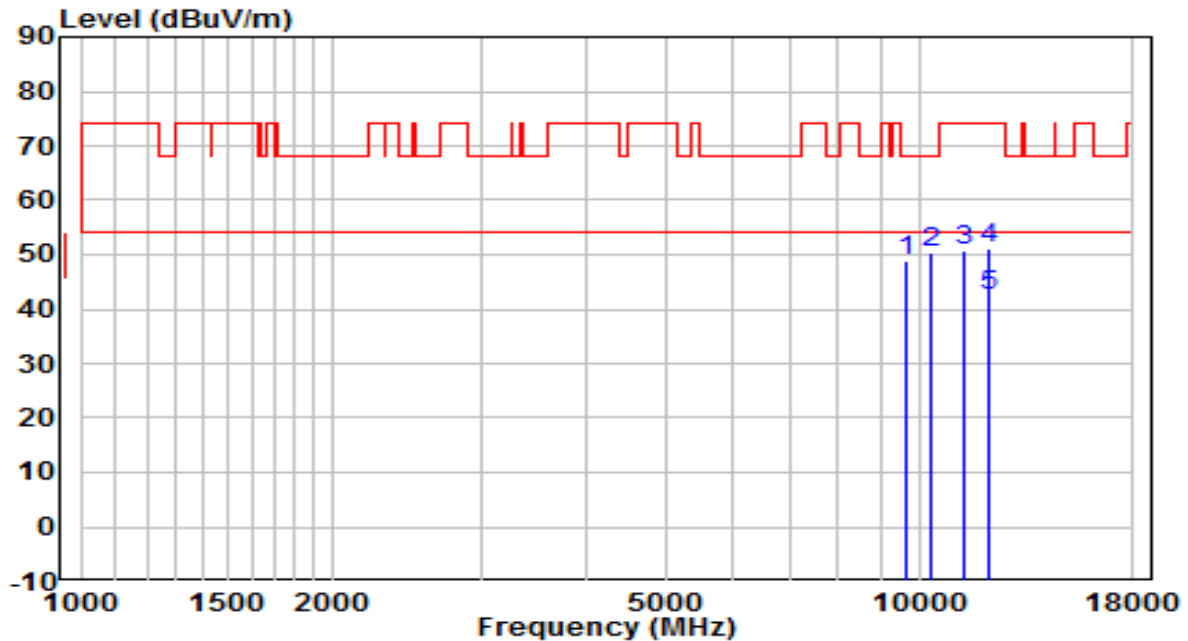


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9644.500	34.22	14.69	48.91	-19.29	68.20	Peak
2	10367.000	33.57	16.62	50.19	-18.01	68.20	Peak
3	11302.000	32.58	18.18	50.76	-23.24	74.00	Peak
4	12101.000	33.40	17.84	51.24	-22.76	74.00	Peak
5	* 12101.000	24.61	17.84	42.45	-11.55	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	120V/60Hz

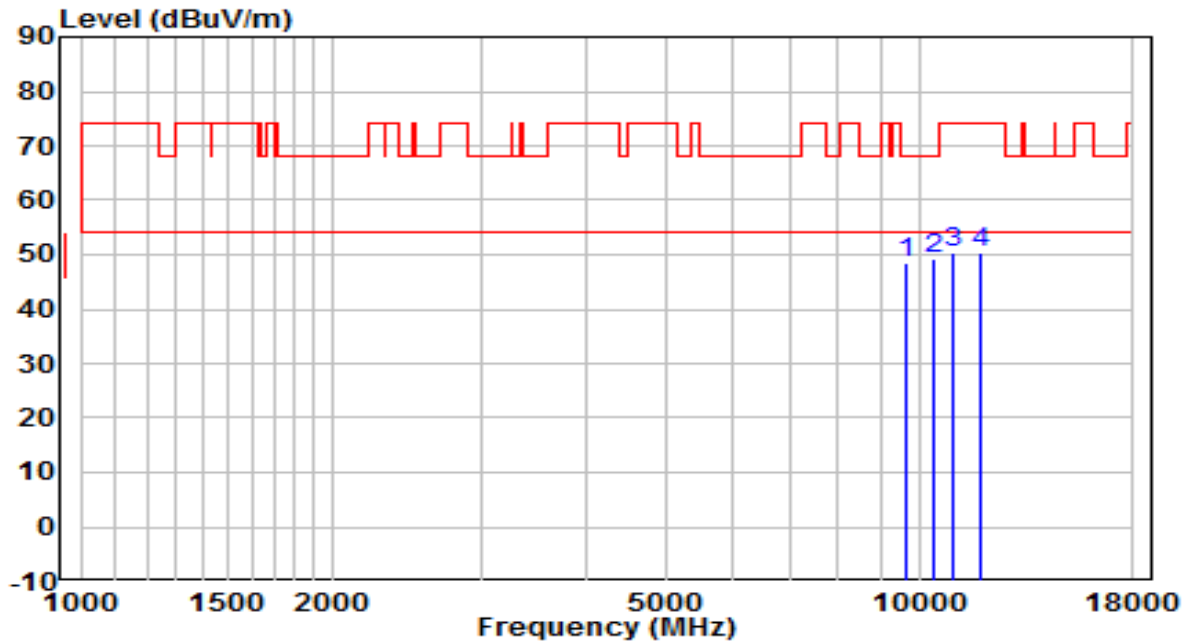


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9653.000	33.75	14.71	48.46	-19.74	68.20	Peak
2	* 10409.500	32.54	16.76	49.30	-18.90	68.20	Peak
3	10996.000	32.60	17.77	50.37	-23.63	74.00	Peak
4	11803.500	32.29	18.07	50.36	-23.64	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9120D	Temp. / Humidity	24.2°C/38%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	120V/60Hz

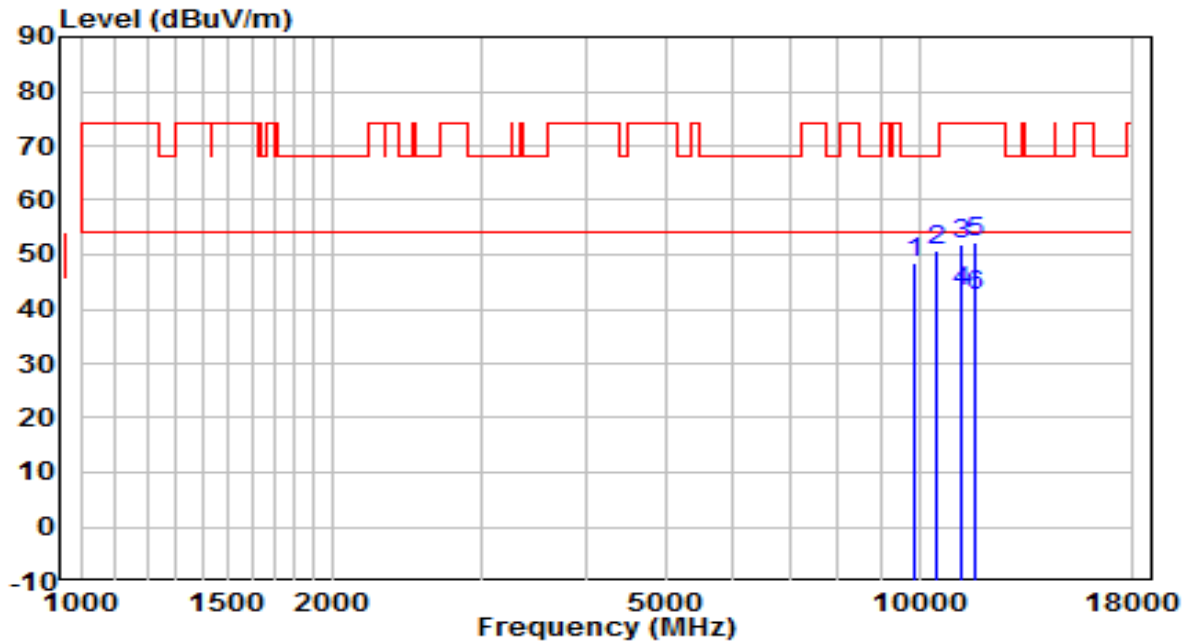


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	9840.000	33.34	15.06	48.40	-19.80	68.20	Peak
2	10460.500	33.82	16.93	50.76	-17.44	68.20	Peak
3	11191.500	33.74	18.04	51.78	-22.22	74.00	Peak
4	* 11191.500	25.16	18.04	43.20	-10.80	54.00	Average
5	11642.000	33.93	18.27	52.20	-21.80	74.00	Peak
6	11642.000	24.11	18.27	42.38	-11.62	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

The Result of Radiated Spurious Emission below 1GHz:

EUT	ACCESS POINT	Date of Test	2021-04-28
Factor	VULB 9162	Temp. / Humidity	23.0°C/50.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz	Test Voltage	120V/60Hz

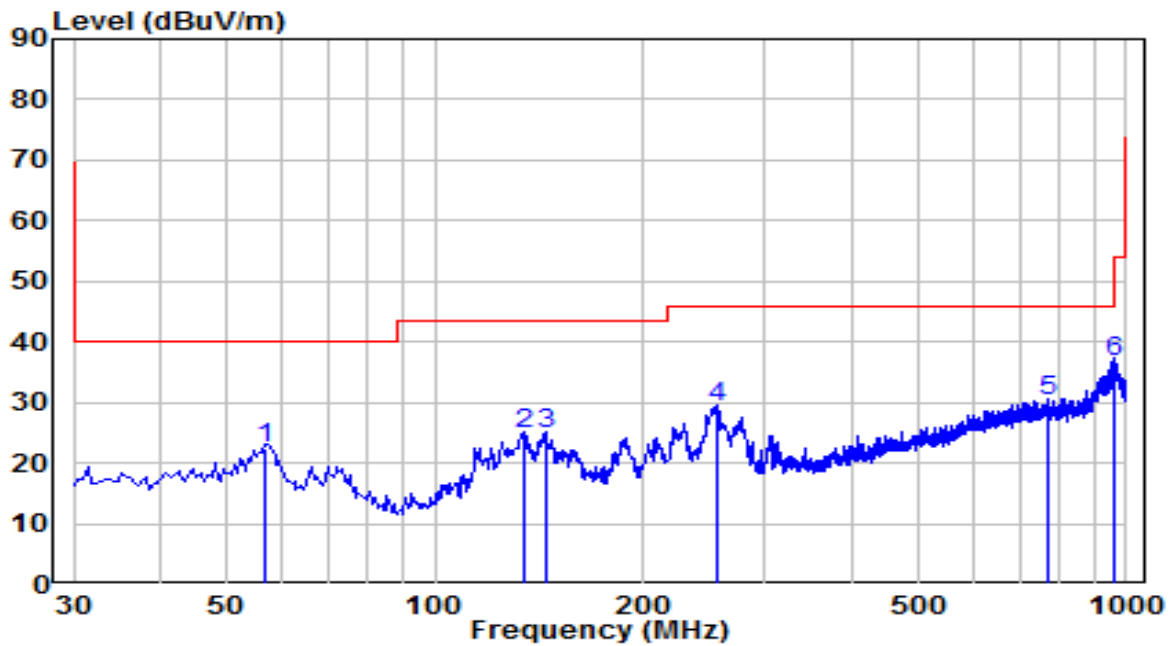


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	56.675	1.51	20.82	22.33	-17.67	40.00	QP
2	134.760	8.67	16.16	24.83	-18.67	43.50	QP
3	144.460	8.93	16.01	24.94	-18.56	43.50	QP
4	255.040	8.76	20.56	29.32	-16.68	46.00	QP
5	* 769.140	0.13	30.26	30.39	-15.61	46.00	QP
6	965.080	4.37	32.40	36.77	-17.23	54.00	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of Radiated emissions (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 40GHz), is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

EUT	ACCESS POINT	Date of Test	2021-04-28
Factor	VULB 9162	Temp. / Humidity	23.0°C/50.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz	Test Voltage	120V/60Hz

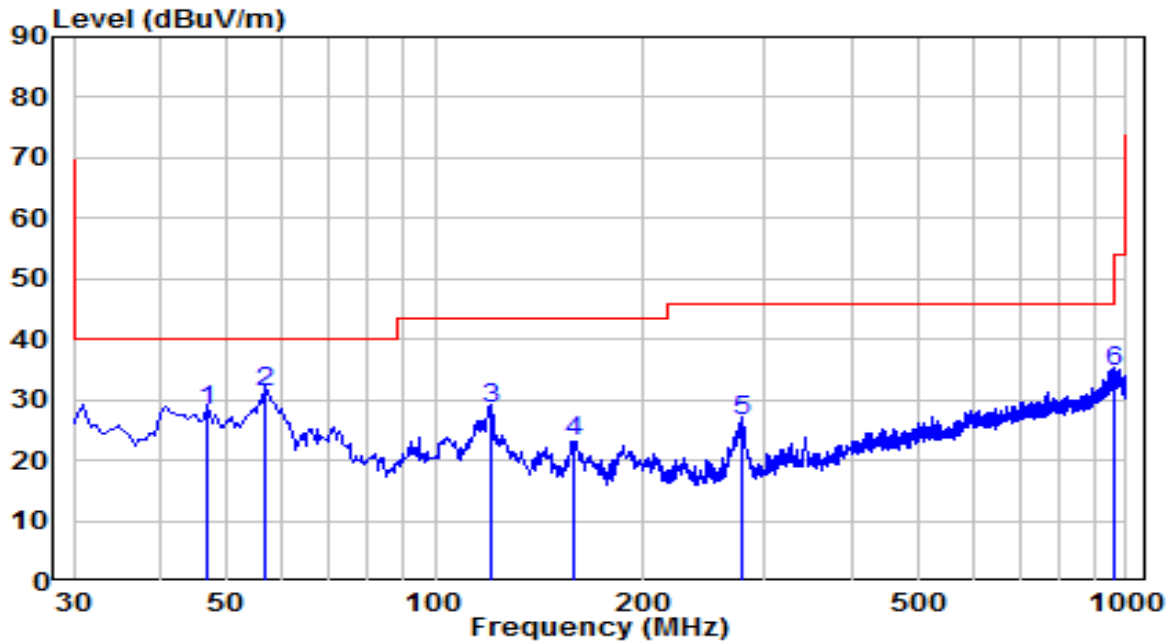


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	46.975	6.17	21.90	28.07	-11.93	40.00	QP
2	56.675	10.34	20.82	31.16	-8.84	40.00	QP
3	120.695	11.37	17.17	28.54	-14.96	43.50	QP
4	159.010	6.94	16.29	23.23	-20.27	43.50	QP
5	277.350	5.67	20.95	26.62	-19.38	46.00	QP
6	960.715	2.37	32.33	34.70	-19.30	54.00	QP

Note:

1. " **", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of Radiated emissions (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 40GHz), is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

The Worst Result of Radiated Spurious Emission above 18GHz:

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9170	Temp. / Humidity	20.8°C /42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz	Test Voltage	120V/60Hz

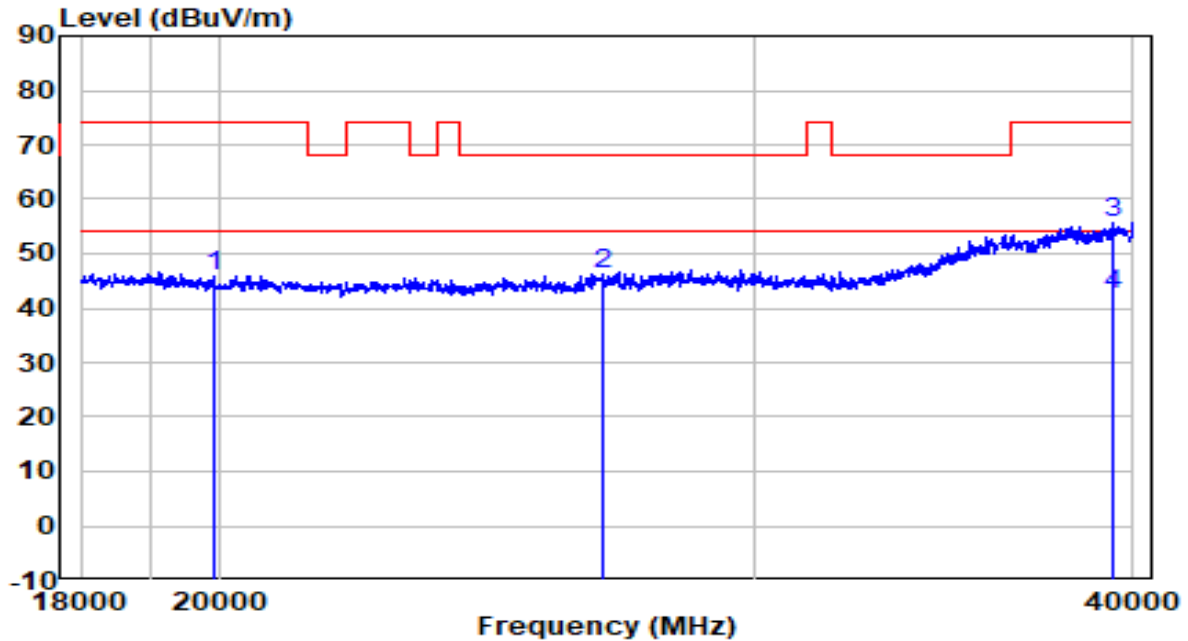


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	19903.000	579.19	-533.20	45.99	-28.01	74.00	Peak
2	26756.000	580.43	-534.15	46.28	-21.92	68.20	Peak
3	39384.000	587.31	-531.48	55.83	-18.17	74.00	Peak
4	* 39384.000	574.03	-531.48	42.55	-11.45	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-08
Factor	BBHA 9170	Temp. / Humidity	20.8°C /42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz	Test Voltage	120V/60Hz

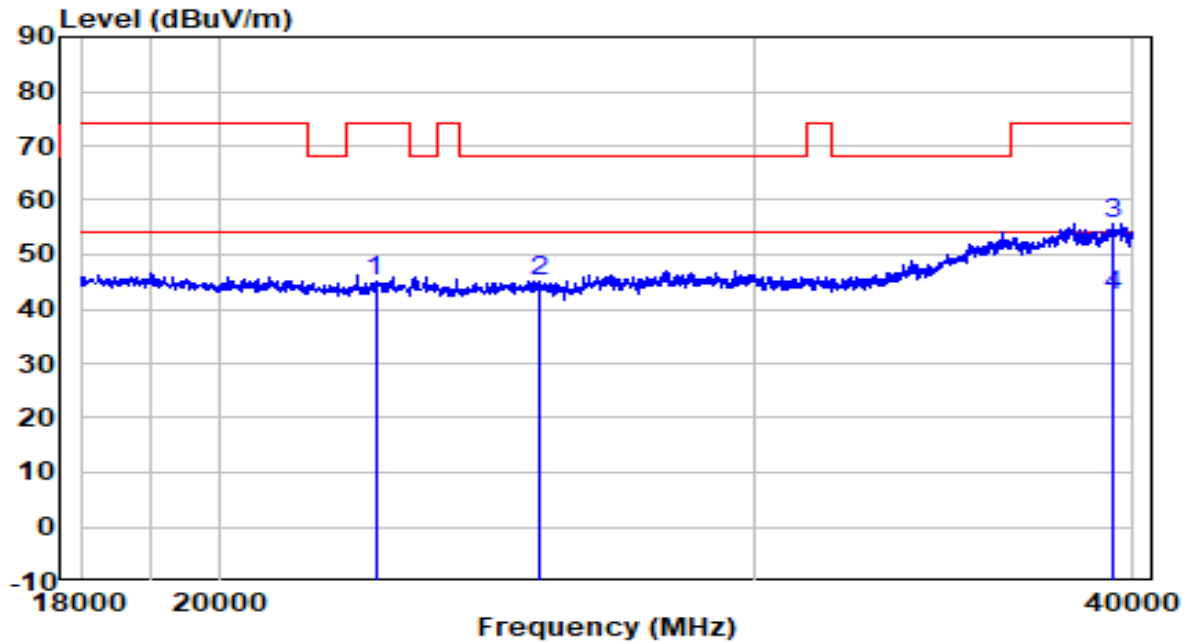

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	22510.000	579.58	-534.30	45.28	-28.72	74.00	Peak
2	25480.000	579.14	-534.09	45.05	-23.15	68.20	Peak
3	39373.000	587.19	-531.47	55.72	-18.28	74.00	Peak
4	* 39373.000	573.94	-531.47	42.47	-11.53	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. Radiated Restricted Band Edge Measurement

7.8.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz.

- 1) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.
- 2) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2.Test Procedure Used

KDB 789033 D02v02r01 – Section G

7.8.3.Test Setting

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$.

802.11a	VBW = 750Hz	802.11ax-HE20	VBW = 200Hz
802.11ac-VHT20	VBW = 100Hz	802.11ax-HE40	VBW = 200Hz
802.11ac-VHT40	VBW = 200Hz	802.11ax-HE80	VBW = 200Hz
802.11ac-VHT80	VBW = 200Hz	N/A	N/A

4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.


7.8.4. Test Setup

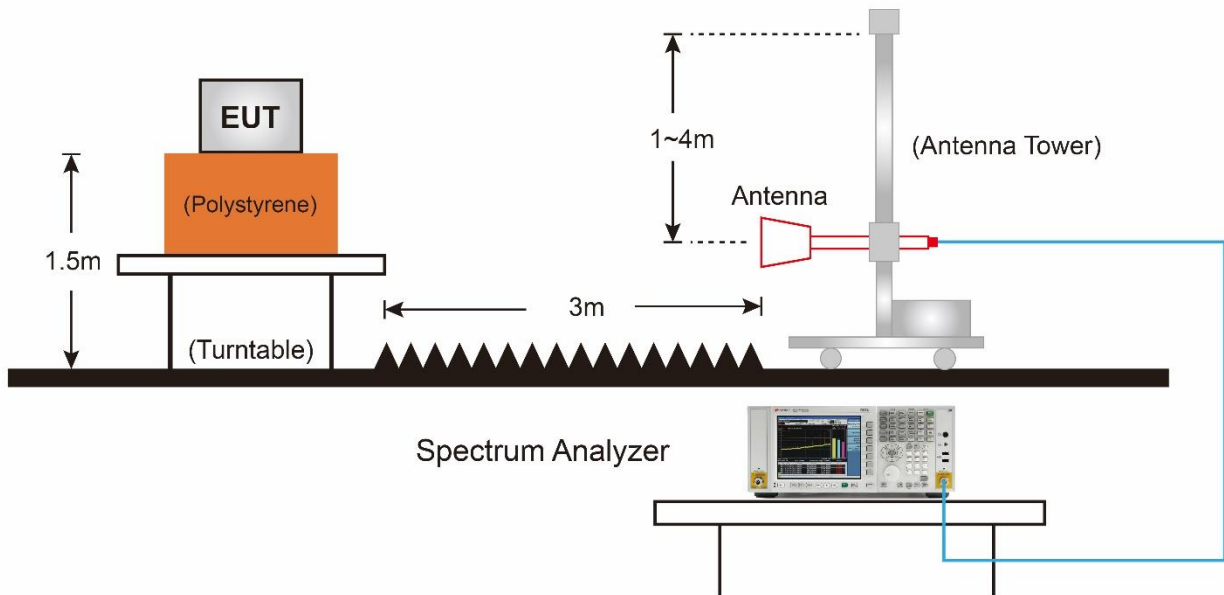

7.8.5. Test Result

Type A Filter Configuration

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at channel 5180MHz	Test Voltage	120/60Hz

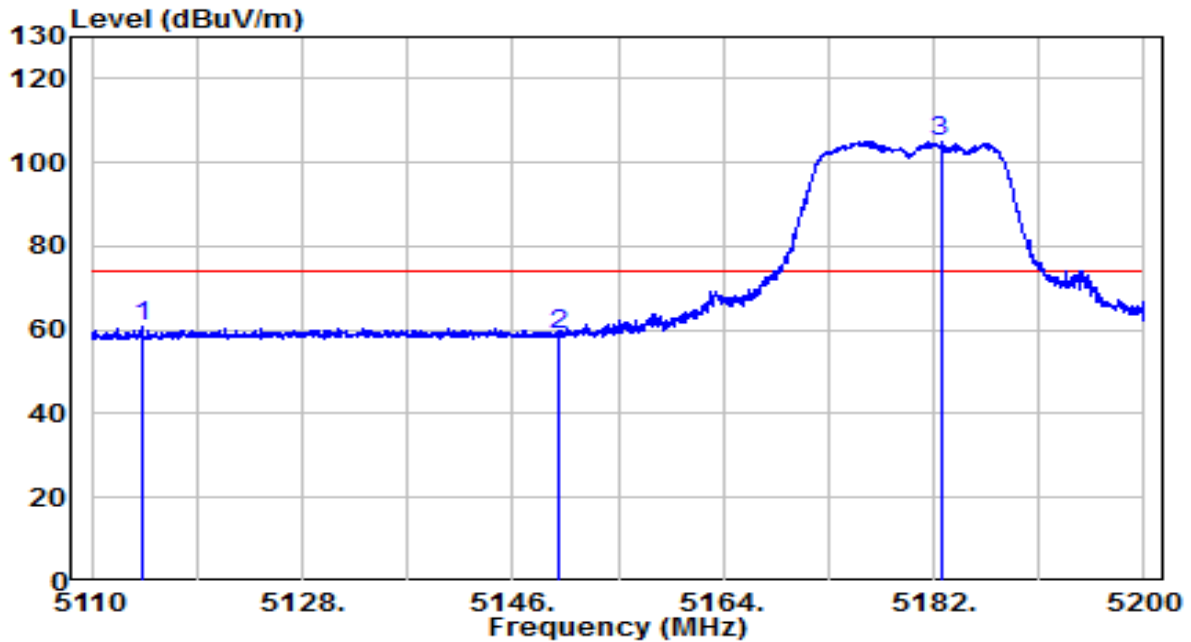


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5114.230	40.89	19.87	60.76	-13.24	74.00	Peak
2	5150.000	39.07	19.91	58.97	-15.03	74.00	Peak
3	5182.585	85.19	19.94	105.13	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5180MHz	Test Voltage	120/60Hz

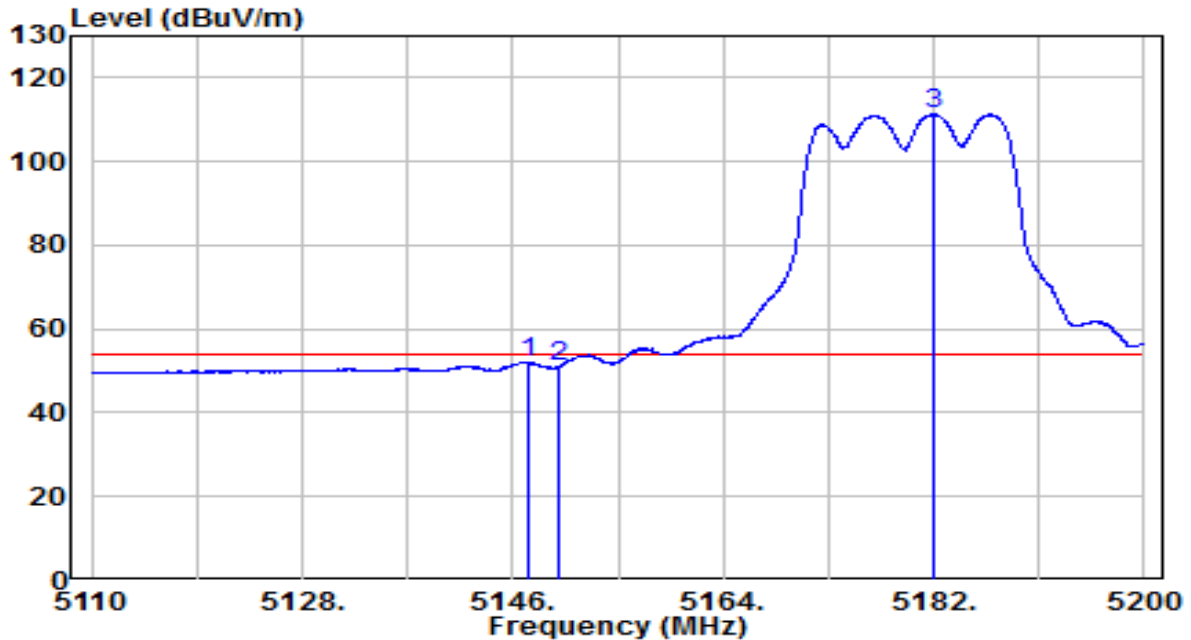


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5147.260	32.25	19.90	52.16	-1.84	54.00	Average
2	5150.000	31.16	19.91	51.07	-2.93	54.00	Average
3	5181.955	91.25	19.94	111.19	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5180MHz	Test Voltage	120/60Hz

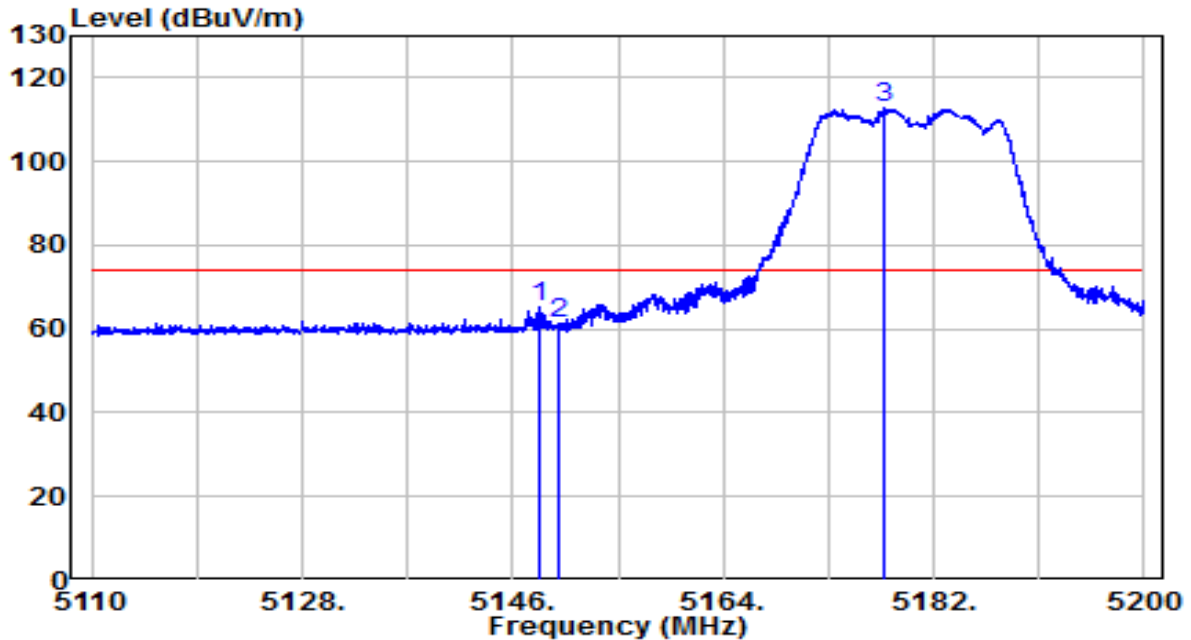


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5148.295	45.20	19.90	65.10	-8.90	74.00	Peak
2	5150.000	41.55	19.91	61.46	-12.54	74.00	Peak
3	5177.680	92.76	19.93	112.70	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5180MHz	Test Voltage	120/60Hz

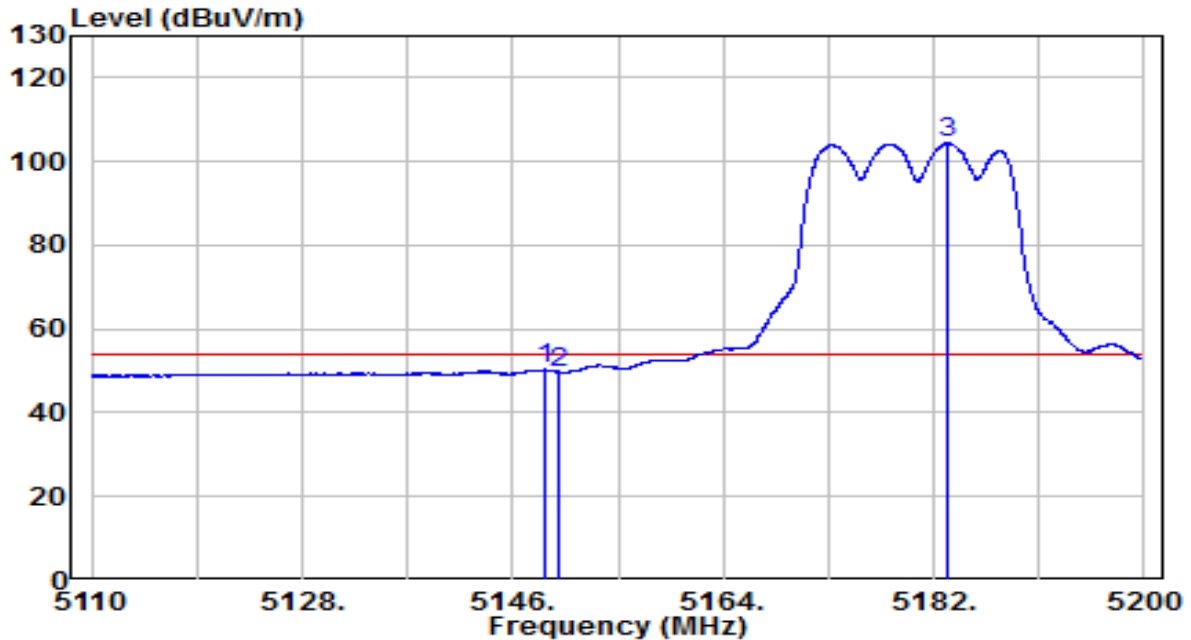


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	5148.655	30.42	19.90	50.33	-3.67	54.00	Average
2		5150.000	29.84	19.91	49.75	-4.25	54.00	Average
3		5183.215	84.42	19.94	104.36	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5240MHz	Test Voltage	120/60Hz

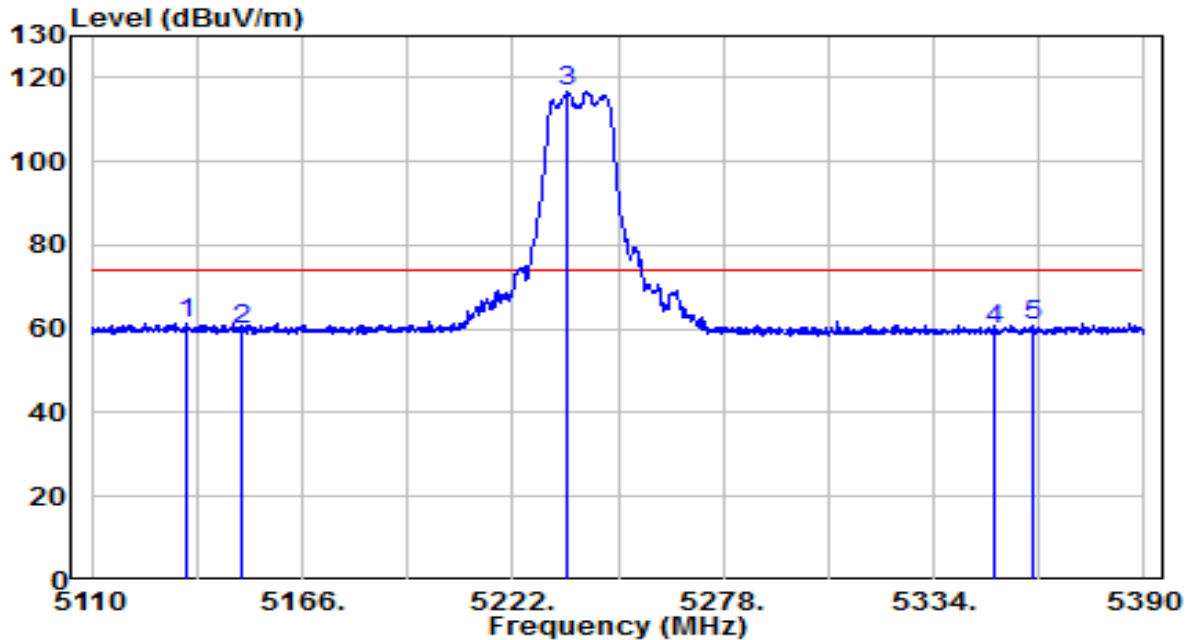


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5135.200	41.49	19.89	61.39	-12.61	74.00	Peak
2	5150.000	40.12	19.91	60.02	-13.98	74.00	Peak
3	5236.700	96.54	20.00	116.53	N/A	N/A	Peak
4	5350.000	39.49	20.11	59.61	-14.39	74.00	Peak
5	5360.460	40.70	20.12	60.83	-13.17	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5240MHz	Test Voltage	120/60Hz

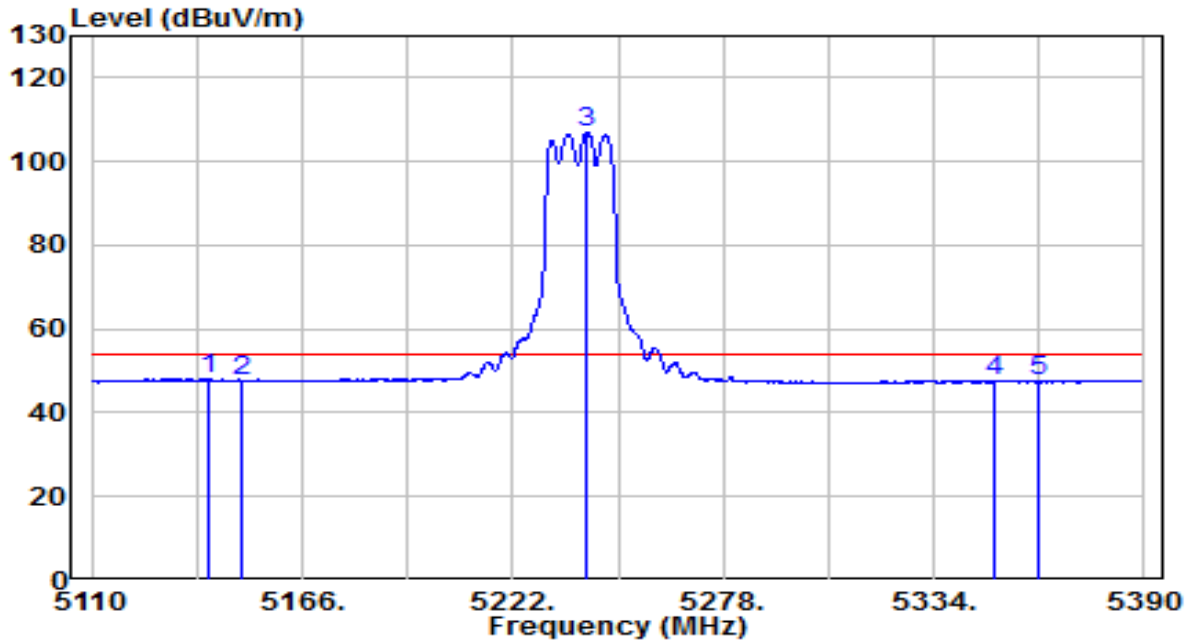


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5141.220	28.01	19.90	47.91	-6.09	54.00	Average
2	5150.000	27.79	19.91	47.69	-6.31	54.00	Average
3	5241.600	87.00	20.00	107.00	N/A	N/A	Average
4	5350.000	27.37	20.11	47.48	-6.52	54.00	Average
5	5362.140	27.49	20.13	47.62	-6.38	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5240MHz	Test Voltage	120/60Hz

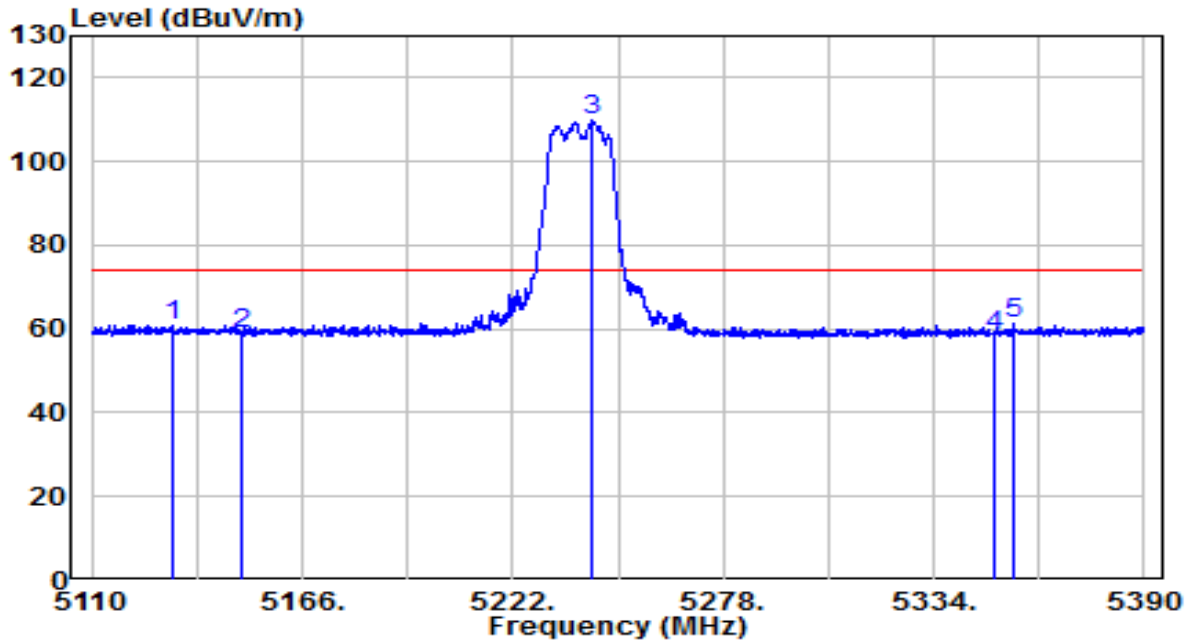


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5131.420	40.92	19.89	60.80	-13.20	74.00	Peak
2	5150.000	38.87	19.91	58.77	-15.23	74.00	Peak
3	5243.140	89.70	20.00	109.70	N/A	N/A	Peak
4	5350.000	38.50	20.11	58.61	-15.39	74.00	Peak
5	* 5355.140	41.43	20.12	61.55	-12.45	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5240MHz	Test Voltage	120/60Hz

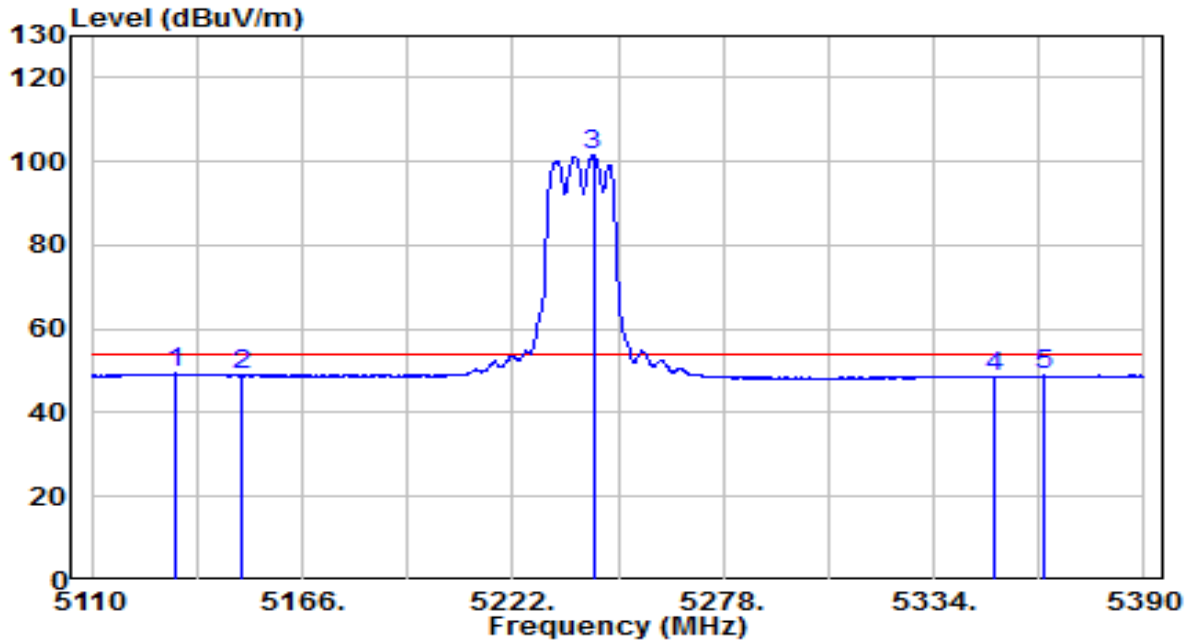


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5132.120	29.45	19.89	49.34	-4.66	54.00	Average
2	5150.000	29.01	19.91	48.91	-5.09	54.00	Average
3	5243.420	81.62	20.00	101.62	N/A	N/A	Average
4	5350.000	28.38	20.11	48.49	-5.51	54.00	Average
5	5363.120	28.74	20.13	48.87	-5.13	54.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5320MHz	Test Voltage	120/60Hz

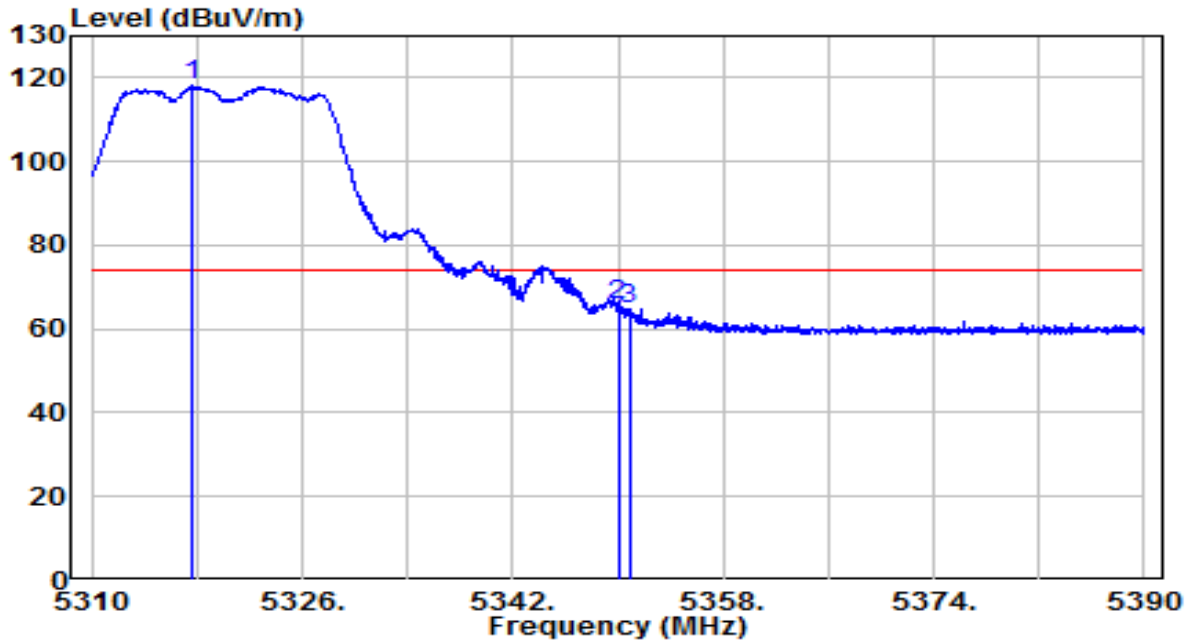


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5317.680	97.94	20.08	118.02	N/A	N/A	Peak
2	* 5350.000	45.70	20.11	65.82	-8.18	74.00	Peak
3	5350.840	44.73	20.11	64.85	-9.15	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5320MHz	Test Voltage	120/60Hz

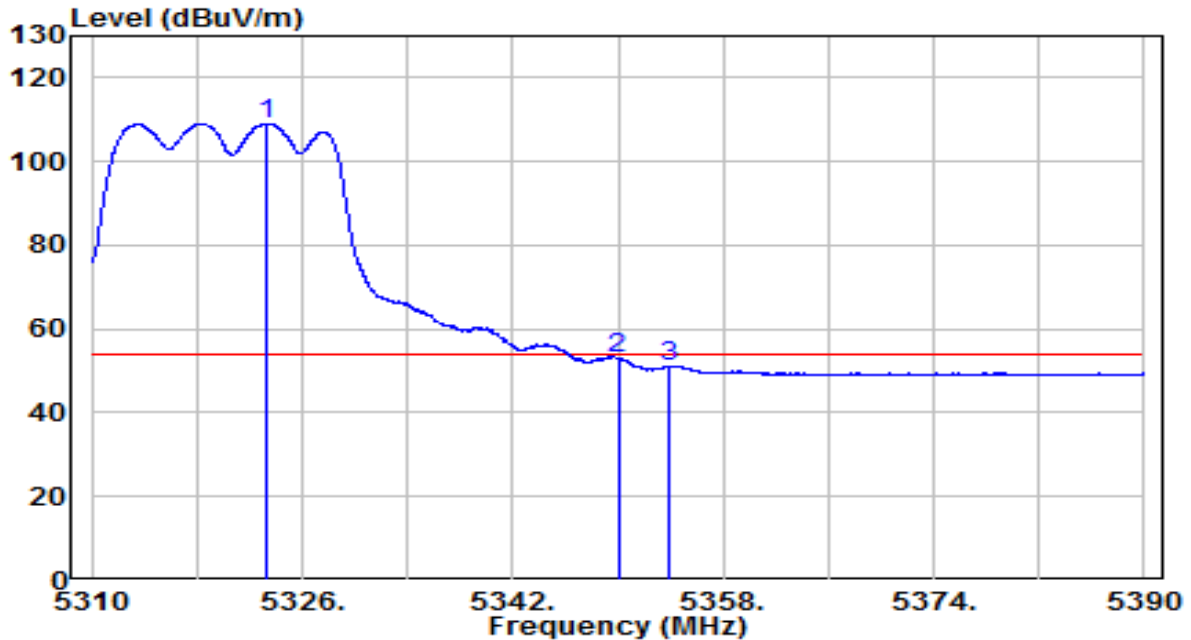


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5323.320	89.04	20.09	109.12	N/A	N/A	Average
2	* 5350.000	32.89	20.11	53.01	-0.99	54.00	Average
3	5353.920	31.11	20.12	51.23	-2.77	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5320MHz	Test Voltage	120/60Hz

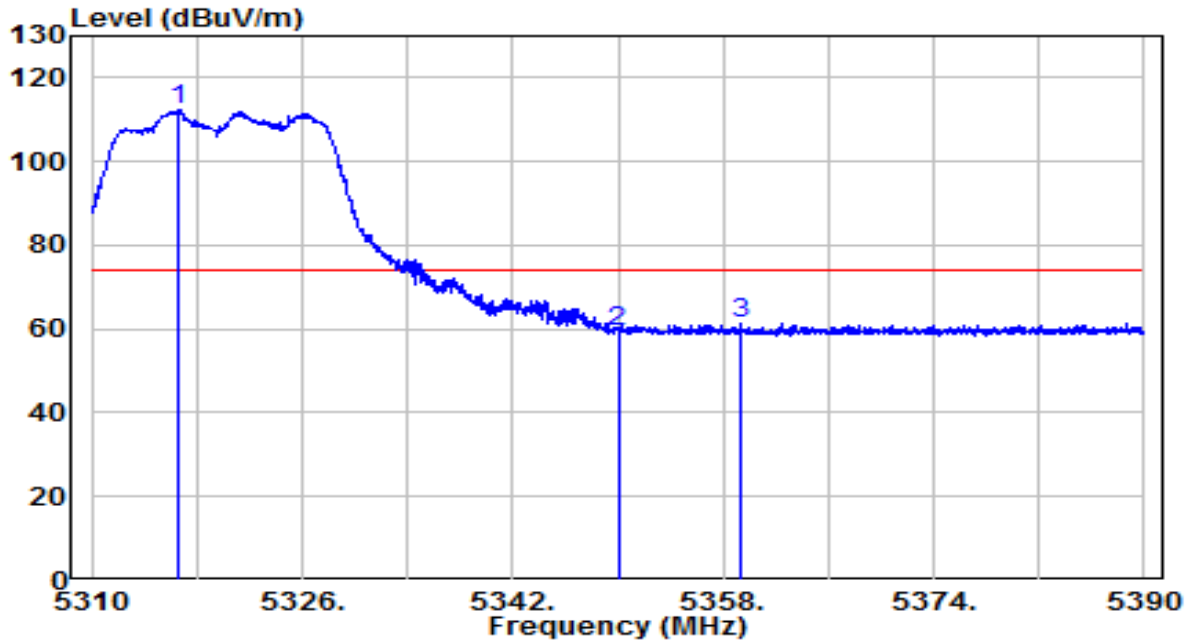


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5316.640	92.37	20.08	112.45	N/A	N/A	Peak
2	5350.000	39.43	20.11	59.54	-14.46	74.00	Peak
3	* 5359.360	40.99	20.12	61.12	-12.88	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5320MHz	Test Voltage	120/60Hz

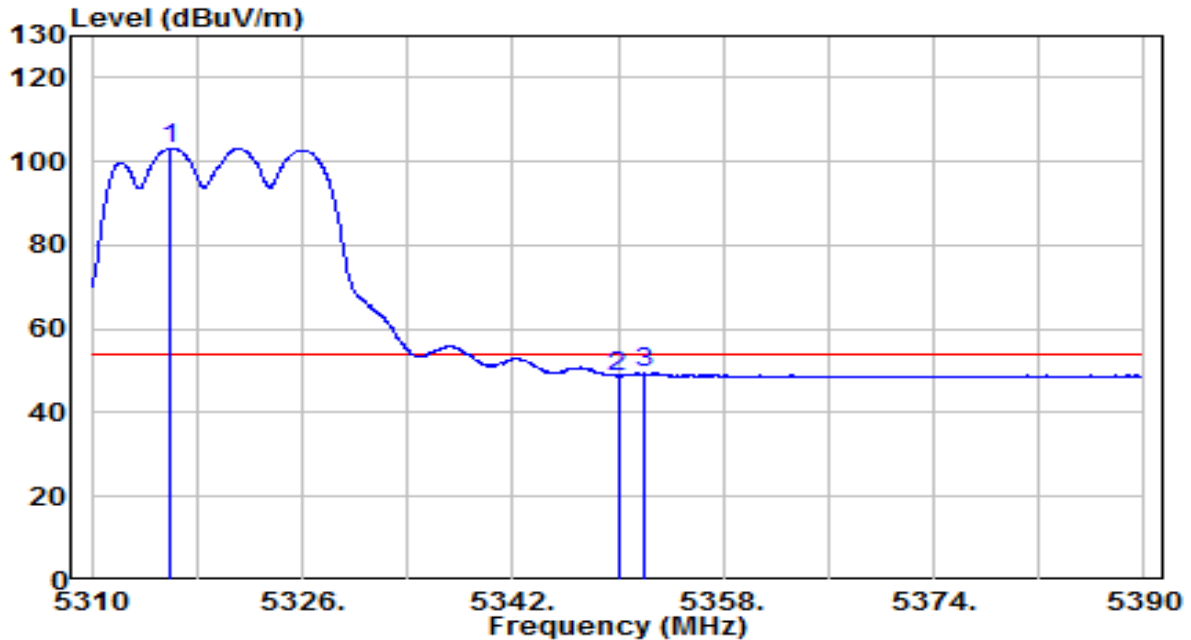


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5316.040	83.17	20.08	103.25	N/A	N/A	Average
2	5350.000	28.58	20.11	48.70	-5.30	54.00	Average
3	* 5351.920	29.36	20.12	49.48	-4.52	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5500MHz	Test Voltage	120/60Hz

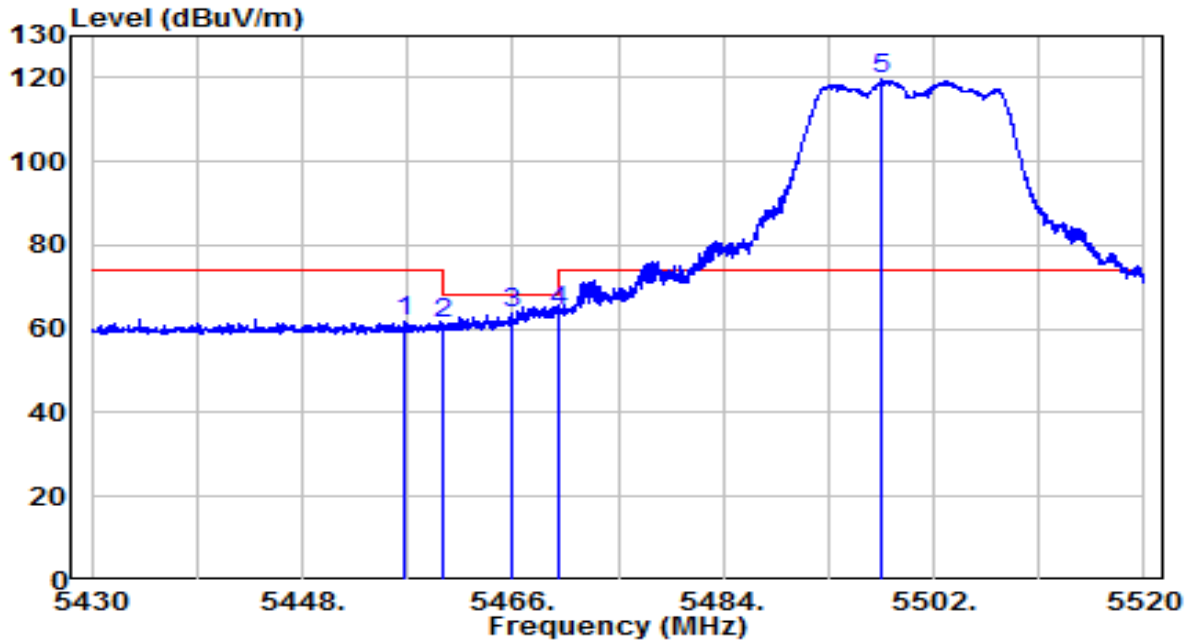


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.730	41.43	20.23	61.65	-12.35	74.00	Peak
2	5460.000	40.97	20.23	61.20	-7.00	68.20	Peak
3	5465.820	43.46	20.23	63.69	-4.51	68.20	Peak
4	* 5470.000	44.26	20.24	64.50	-3.70	68.20	Peak
5	5497.545	99.30	20.27	119.57	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5500MHz	Test Voltage	120/60Hz

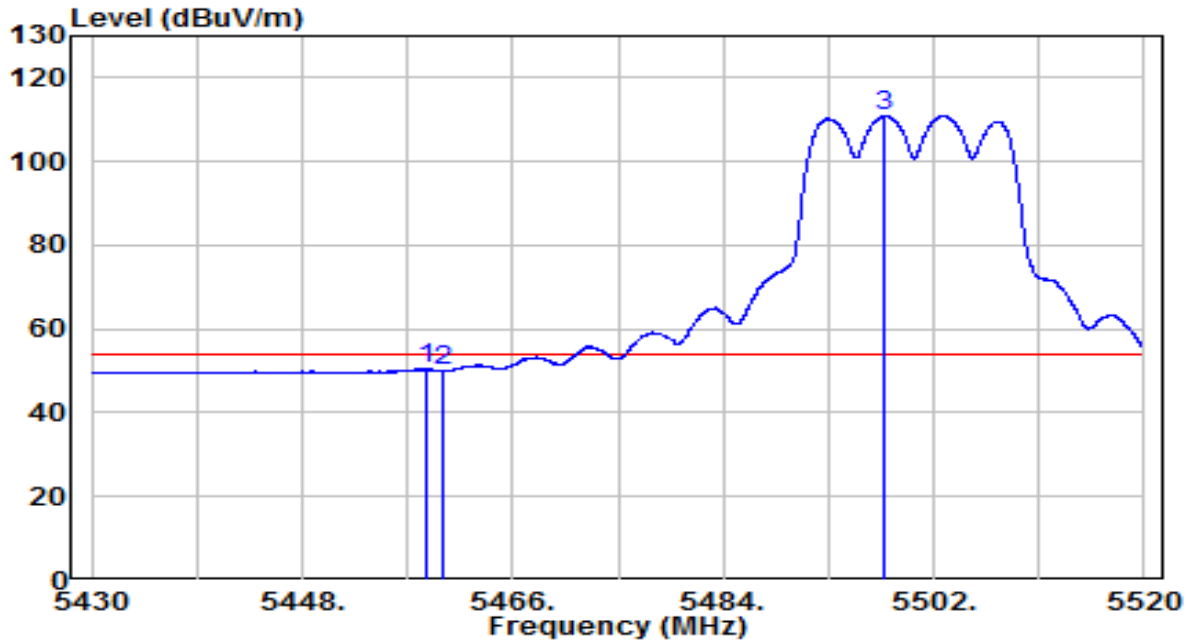


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	30.32	20.23	50.55	-3.45	54.00	Average
2		29.81	20.23	50.04	-3.96	54.00	Average
3		90.66	20.27	110.93	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5500MHz	Test Voltage	120/60Hz

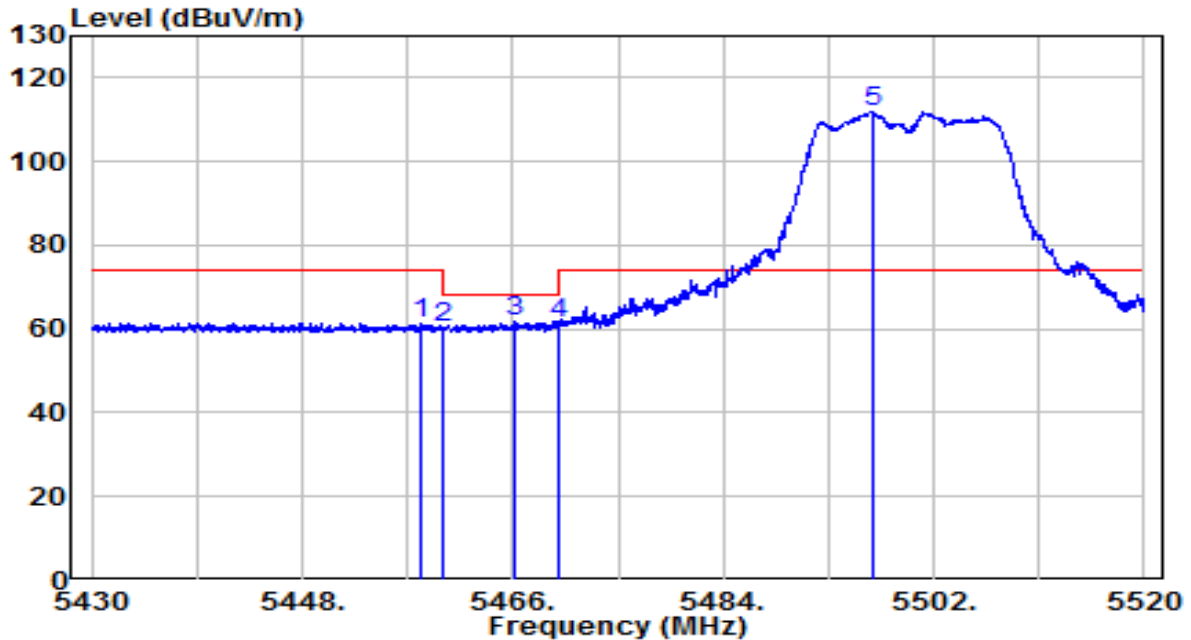


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.125	40.90	20.23	61.13	-12.87	74.00	Peak
2	5460.000	39.91	20.23	60.14	-8.06	68.20	Peak
3	* 5466.180	41.43	20.23	61.67	-6.53	68.20	Peak
4	5470.000	41.11	20.24	61.35	-6.85	68.20	Peak
5	5496.780	91.75	20.27	112.02	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5500MHz	Test Voltage	120/60Hz

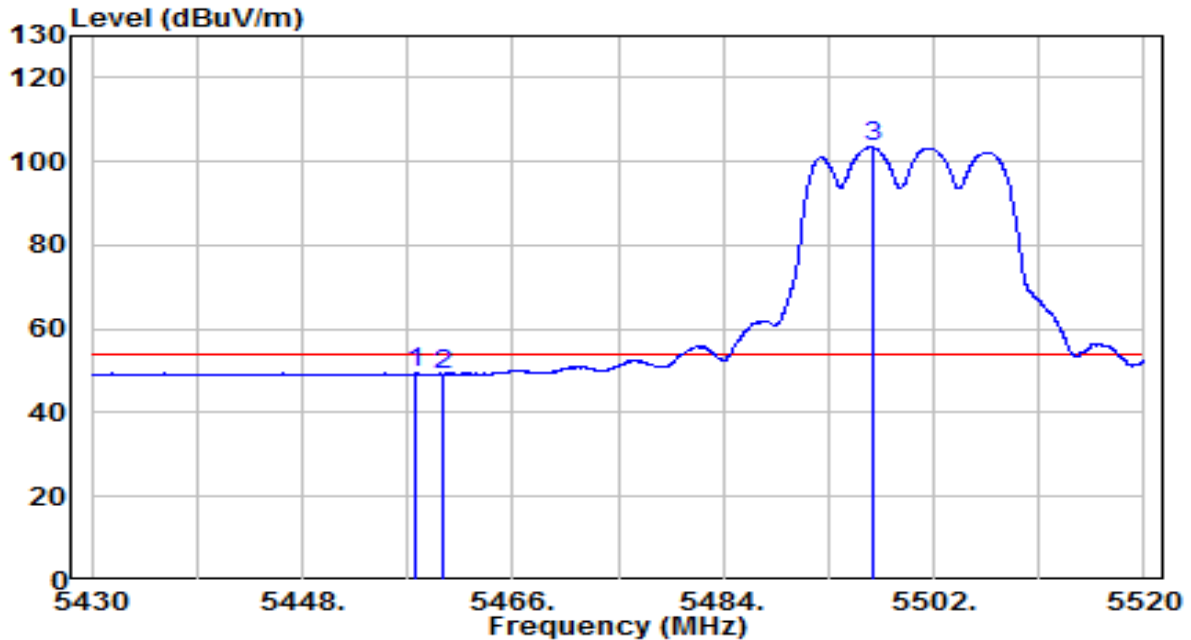


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	29.13	20.23	49.36	-4.64	54.00	Average
2		29.04	20.23	49.26	-4.74	54.00	Average
3		83.13	20.27	103.40	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5700MHz	Test Voltage	120/60Hz

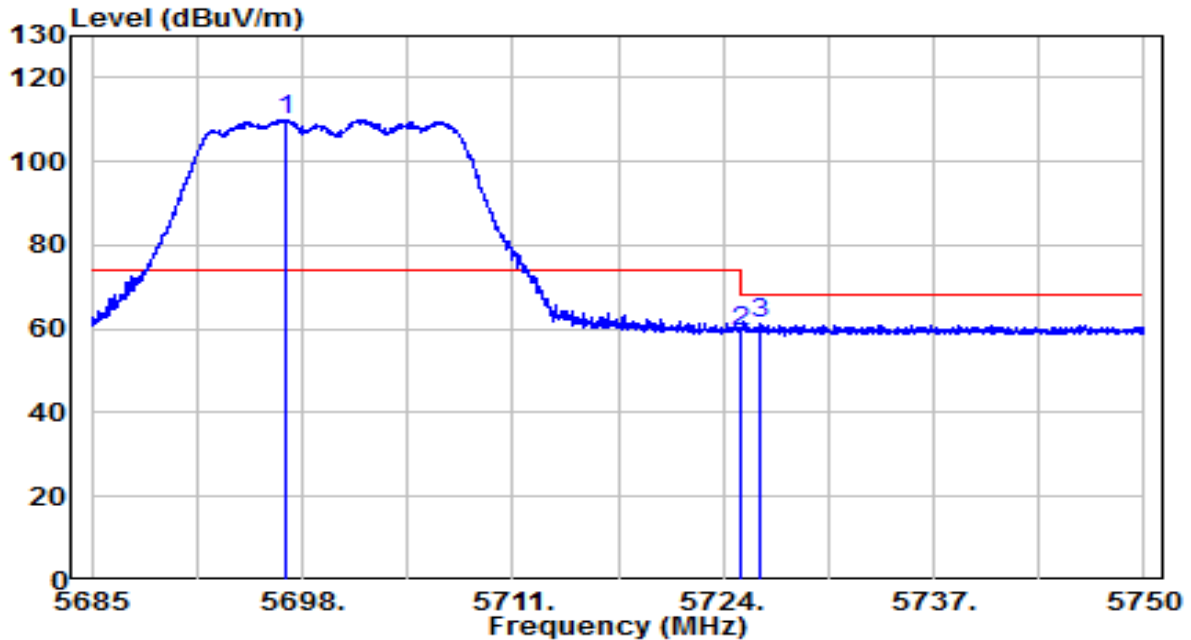


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5696.993	89.17	20.91	110.08	N/A	N/A	Peak
2	5725.000	38.60	21.00	59.60	-8.60	68.20	Peak
3	* 5726.210	40.55	21.00	61.56	-6.64	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5700MHz	Test Voltage	120/60Hz

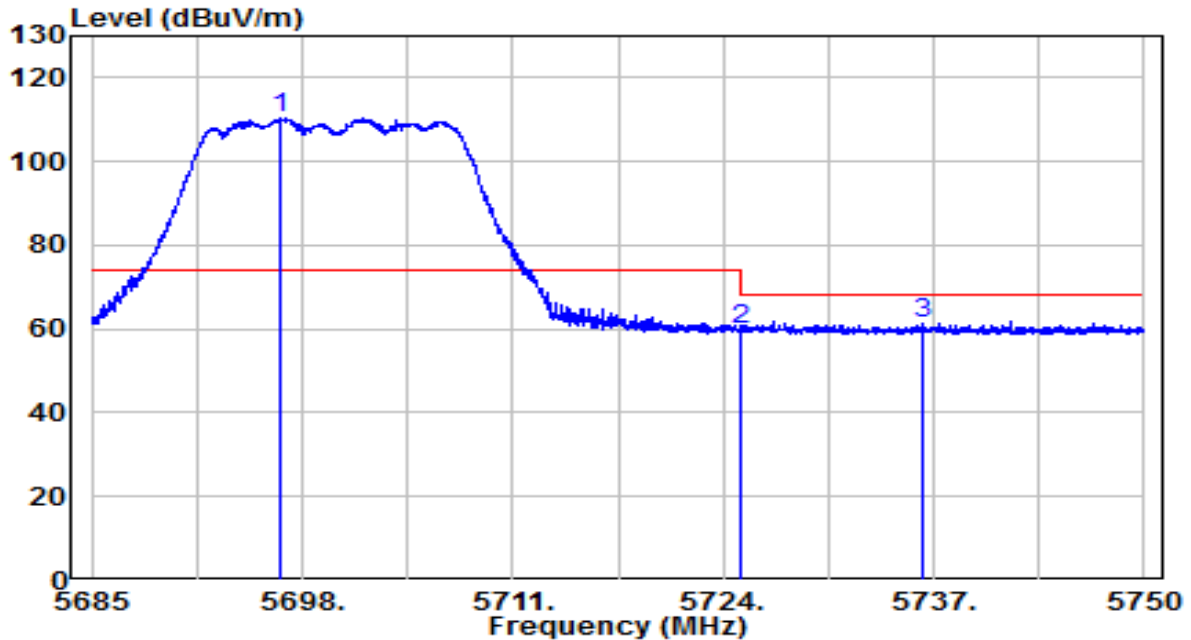


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5696.700	89.65	20.91	110.56	N/A	N/A	Peak
2	5725.000	38.92	21.00	59.92	-8.28	68.20	Peak
3	* 5736.382	40.29	21.04	61.32	-6.88	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5745MHz	Test Voltage	120/60Hz

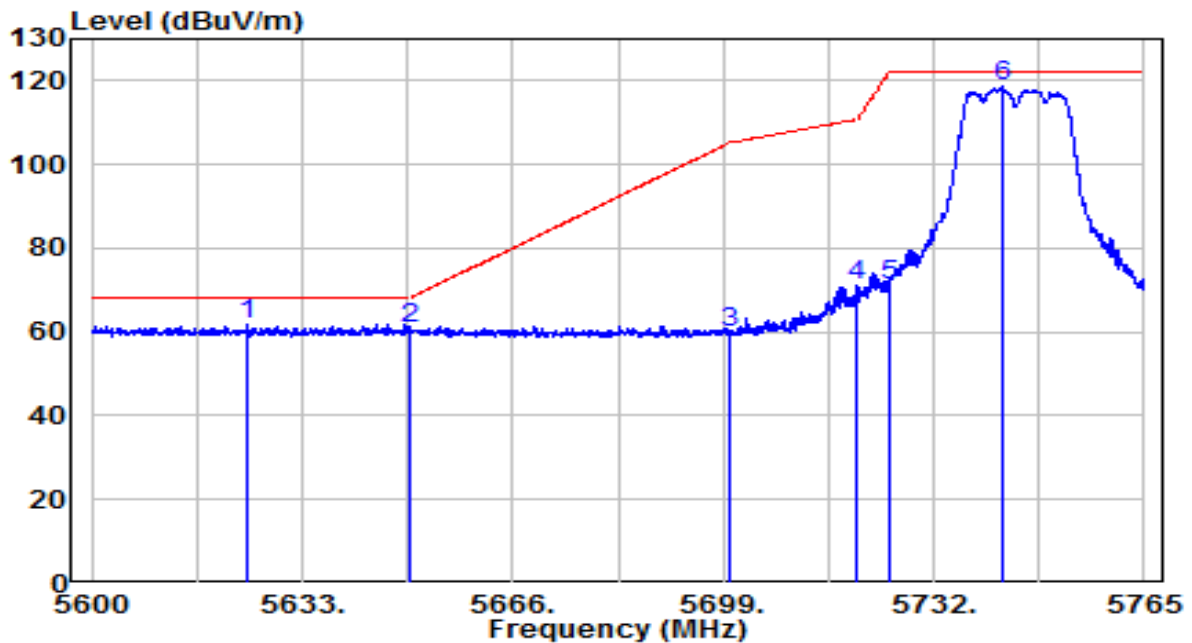


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5624.502	41.19	20.67	61.86	-6.34	68.20	Peak
2	5650.000	39.94	20.76	60.69	-7.51	68.20	Peak
3	5700.000	39.17	20.92	60.09	-45.11	105.20	Peak
4	5720.000	50.26	20.98	71.24	-39.56	110.80	Peak
5	5725.000	50.18	21.00	71.18	-51.02	122.20	Peak
6	5742.643	97.57	21.06	118.62	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5745MHz	Test Voltage	120/60Hz

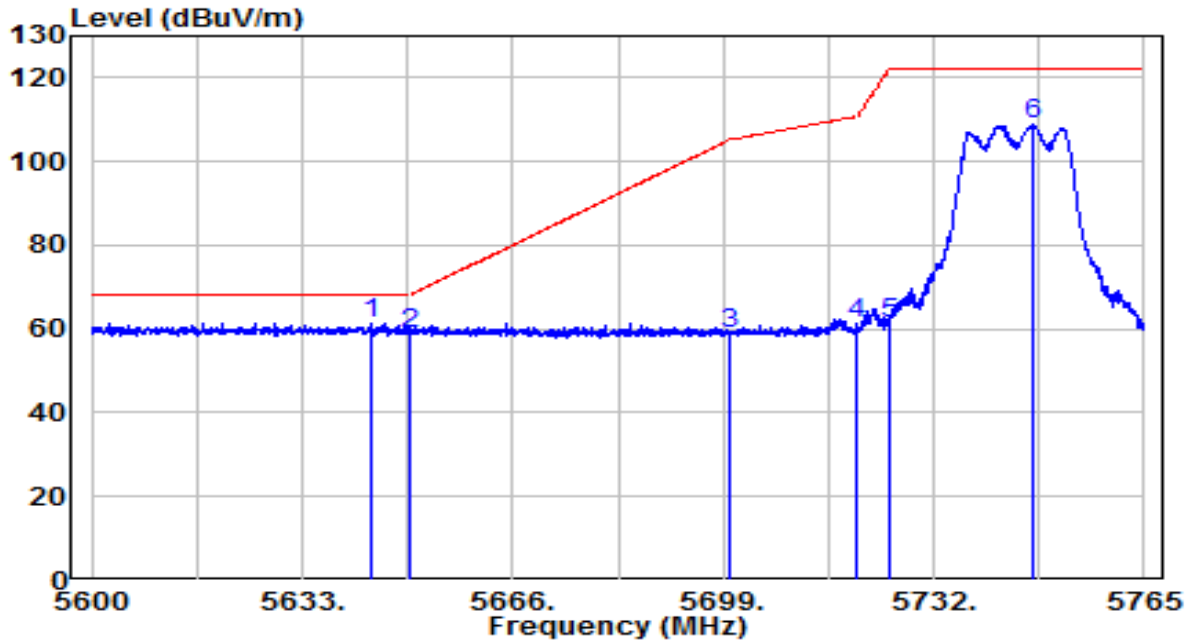


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5643.643	40.69	20.74	61.42	-6.78	68.20	Peak
2	5650.000	38.08	20.76	58.83	-9.37	68.20	Peak
3	5700.000	37.88	20.92	58.79	-46.41	105.20	Peak
4	5720.000	40.58	20.98	61.56	-49.24	110.80	Peak
5	5725.000	40.26	21.00	61.26	-60.94	122.20	Peak
6	5747.592	87.89	21.07	108.96	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5825MHz	Test Voltage	120/60Hz

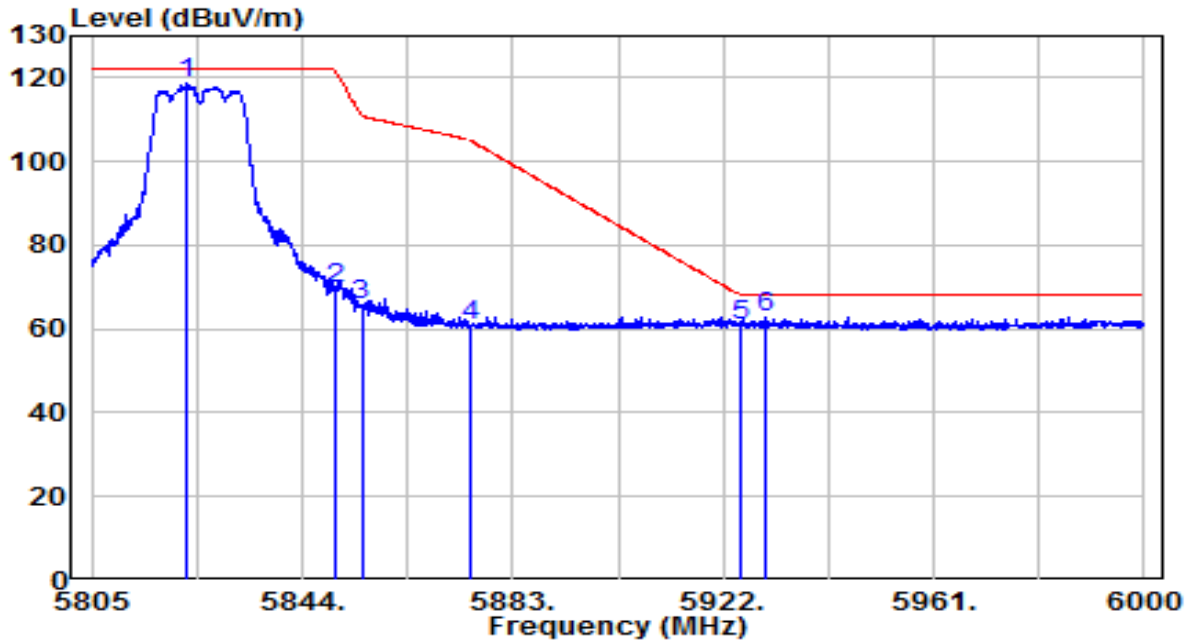


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5822.647	97.16	21.32	118.48	N/A	N/A	Peak
2	5850.000	48.25	21.40	69.66	-52.54	122.20	Peak
3	5855.000	44.12	21.42	65.54	-45.26	110.80	Peak
4	5875.000	39.24	21.49	60.73	-44.47	105.20	Peak
5	5925.000	39.28	21.65	60.93	-7.27	68.20	Peak
6	* 5929.605	41.09	21.66	62.75	-5.45	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11a at Channel 5825MHz	Test Voltage	120/60Hz

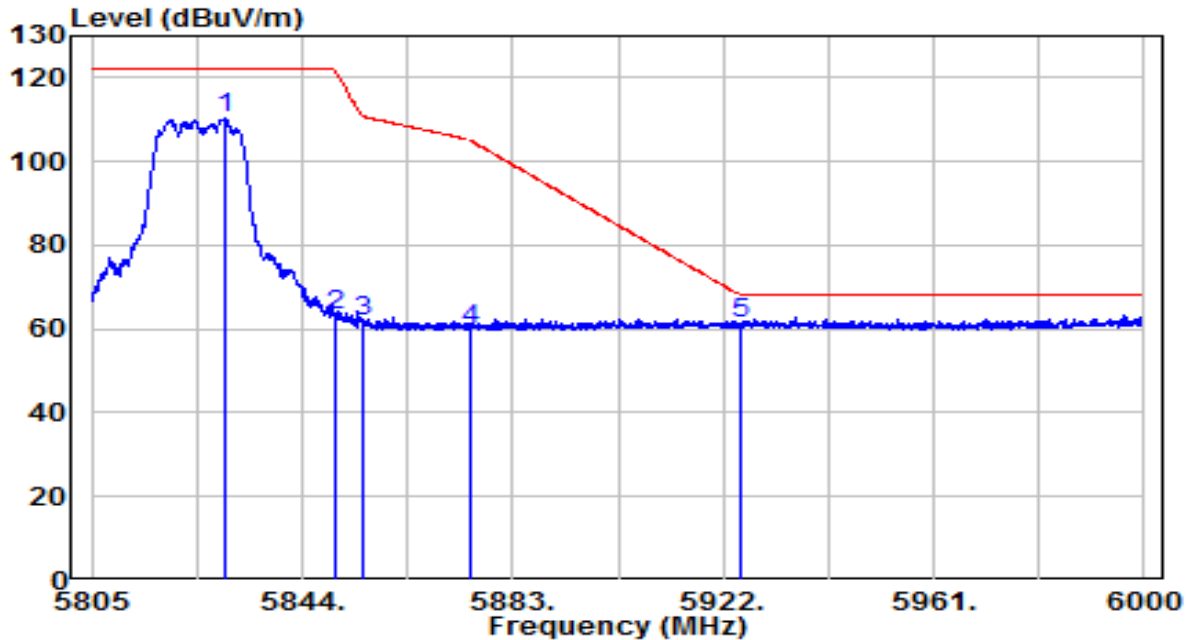


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5829.667	88.89	21.34	110.23	N/A	N/A	Peak
2	5850.000	41.88	21.40	63.28	-58.92	122.20	Peak
3	5855.018	40.16	21.42	61.58	-49.22	110.80	Peak
4	5875.000	38.49	21.49	59.98	-45.22	105.20	Peak
5	* 5925.000	39.82	21.65	61.46	-6.74	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	120/60Hz

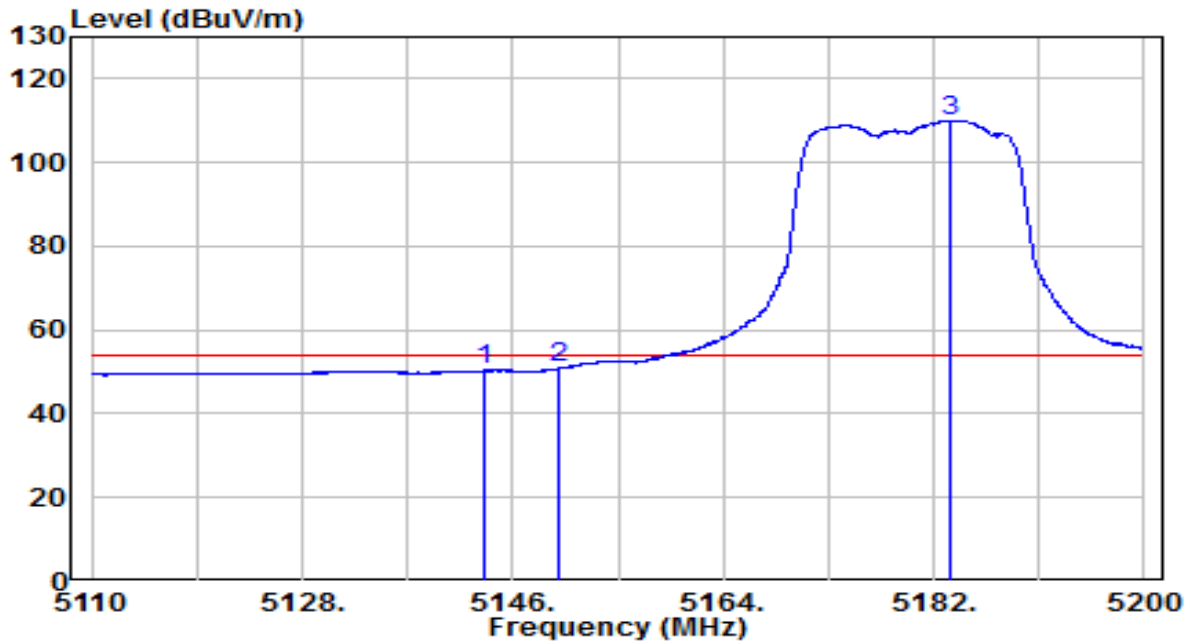


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5143.660	30.42	19.90	50.31	-3.69	54.00	Average
2	* 5150.000	30.87	19.91	50.78	-3.22	54.00	Average
3	5183.305	90.09	19.94	110.03	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	120/60Hz

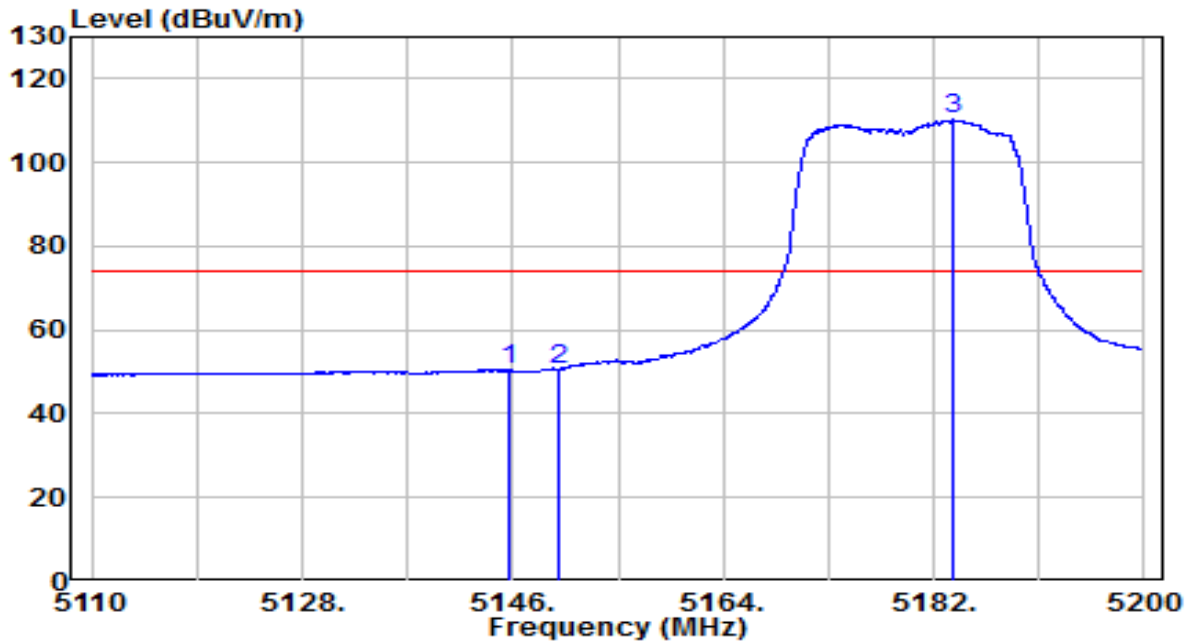


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5145.640	30.53	19.90	50.44	-23.56	74.00	Peak
2	* 5150.000	30.79	19.91	50.70	-23.30	74.00	Peak
3	5183.665	90.22	19.94	110.16	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	120/60Hz

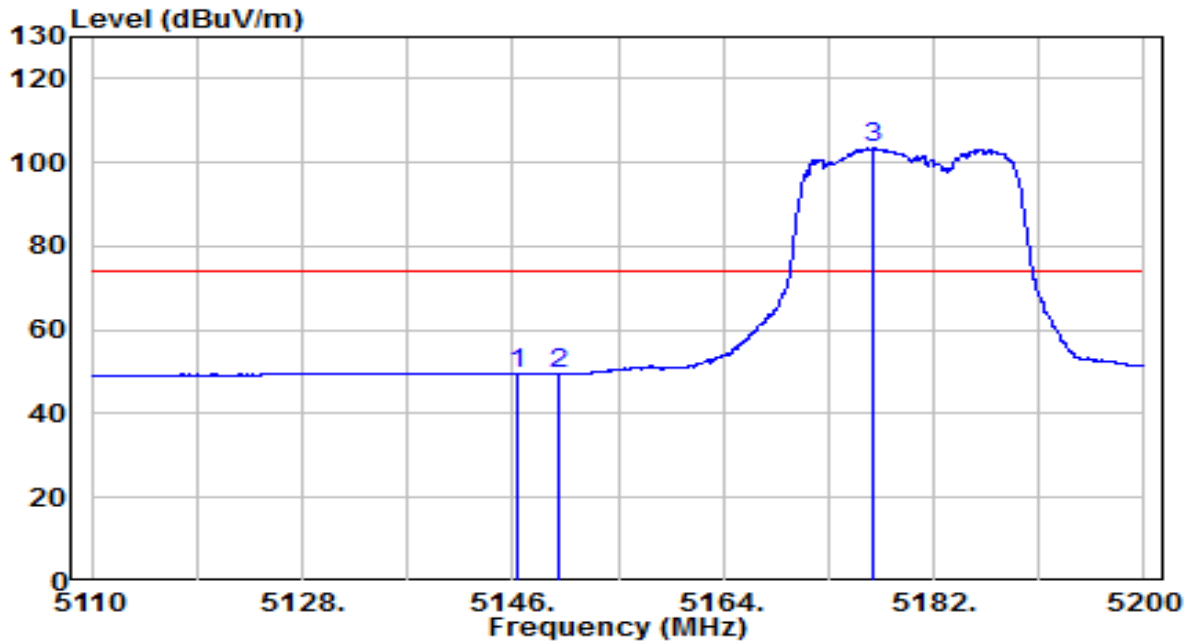


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	29.75	19.90	49.66	-24.34	74.00	Peak
2		29.76	19.91	49.66	-24.34	74.00	Peak
3		83.40	19.93	103.34	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)- Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	120/60Hz

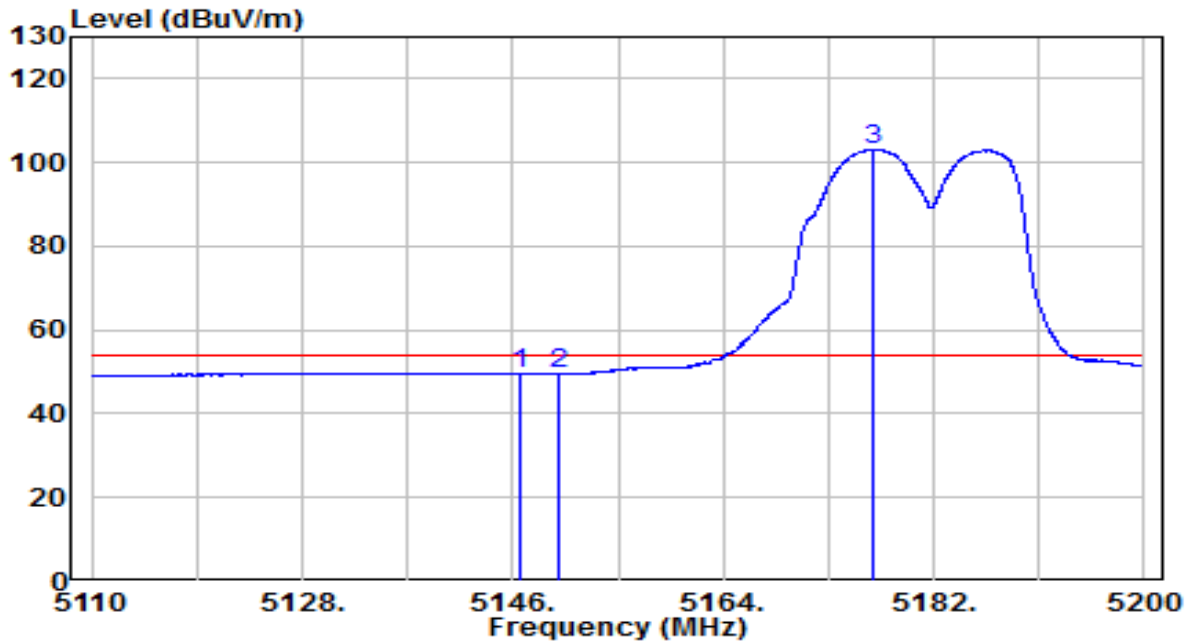


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	5146.720	29.85	19.90	49.75	-4.25	54.00	Average
2		5150.000	29.61	19.91	49.51	-4.49	54.00	Average
3		5176.735	83.25	19.93	103.18	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5240MHz	Test Voltage	120/60Hz

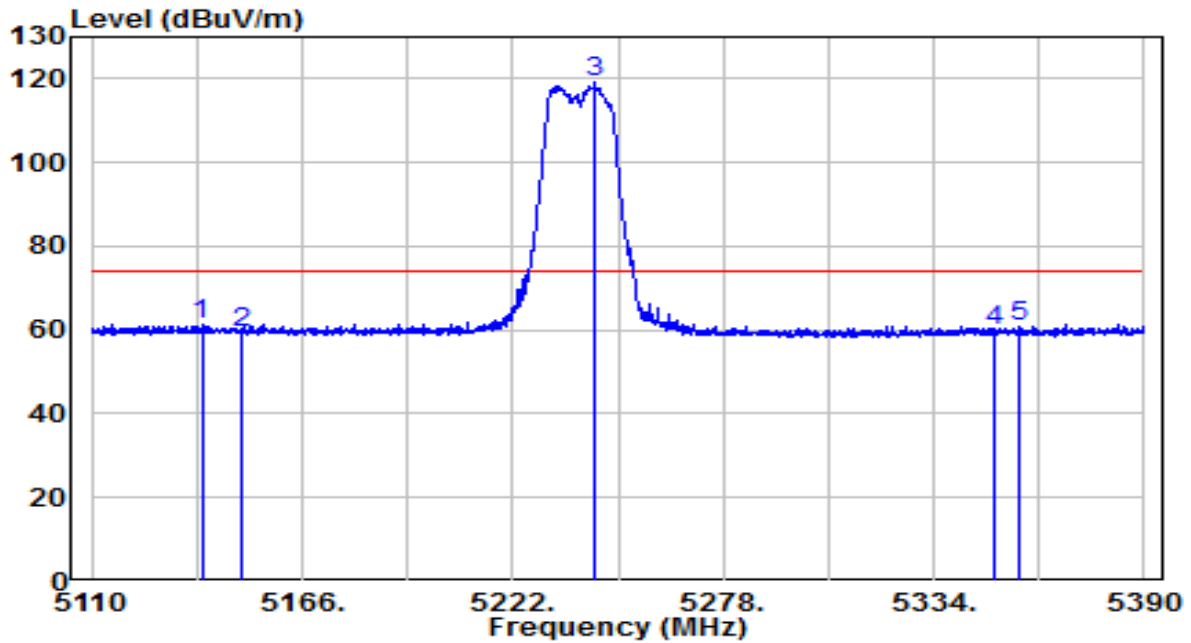


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5139.260	41.51	19.89	61.41	-12.59	74.00	Peak
2	5150.000	39.66	19.91	59.56	-14.44	74.00	Peak
3	5243.700	98.97	20.00	118.97	N/A	N/A	Peak
4	5350.000	39.85	20.11	59.97	-14.03	74.00	Peak
5	5356.540	40.74	20.12	60.86	-13.14	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5240MHz	Test Voltage	120/60Hz

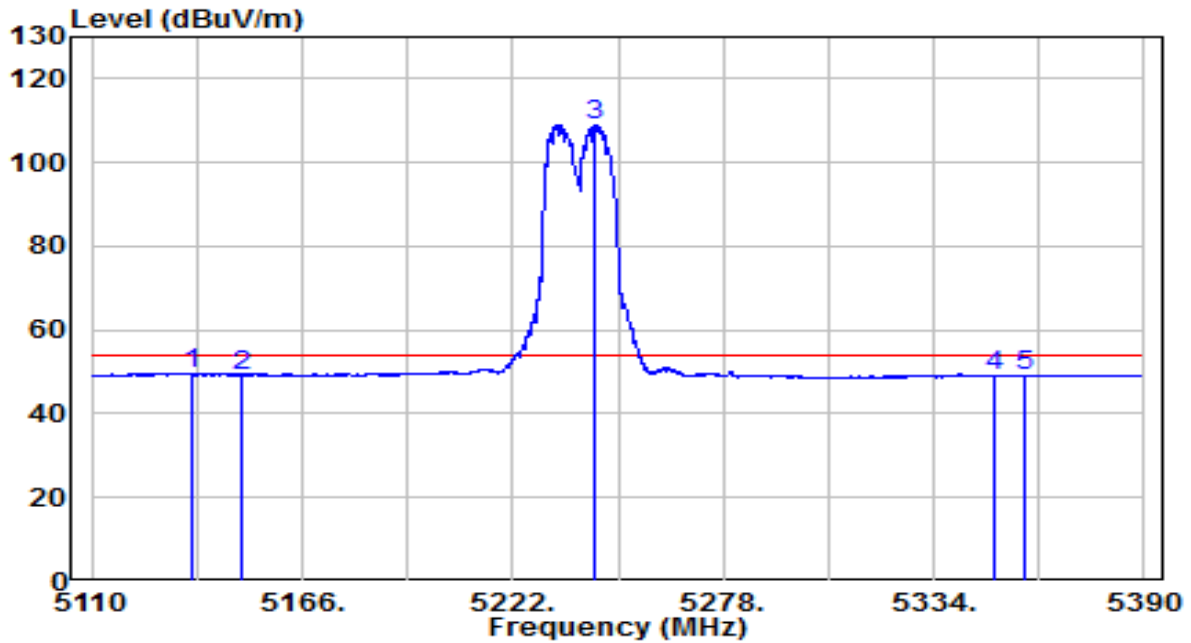


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	29.69	19.89	49.58	-4.42	54.00	Average
2		29.27	19.91	49.18	-4.82	54.00	Average
3		89.10	20.00	109.10	N/A	N/A	Average
4		28.76	20.11	48.87	-5.13	54.00	Average
5		29.02	20.12	49.14	-4.86	54.00	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5240MHz	Test Voltage	120/60Hz

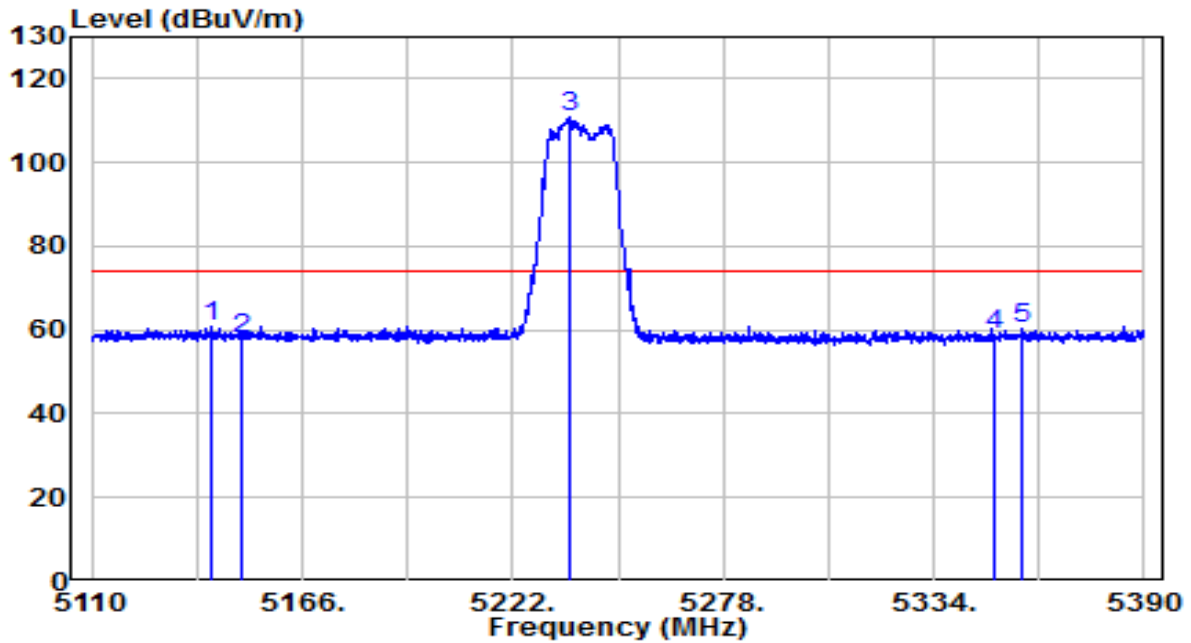


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5141.920	40.75	19.90	60.65	-13.35	74.00	Peak
2	5150.000	38.13	19.91	58.04	-15.96	74.00	Peak
3	5237.260	90.66	20.00	110.65	N/A	N/A	Peak
4	5350.000	38.71	20.11	58.82	-15.18	74.00	Peak
5	5357.380	40.02	20.12	60.14	-13.86	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5240MHz	Test Voltage	120/60Hz

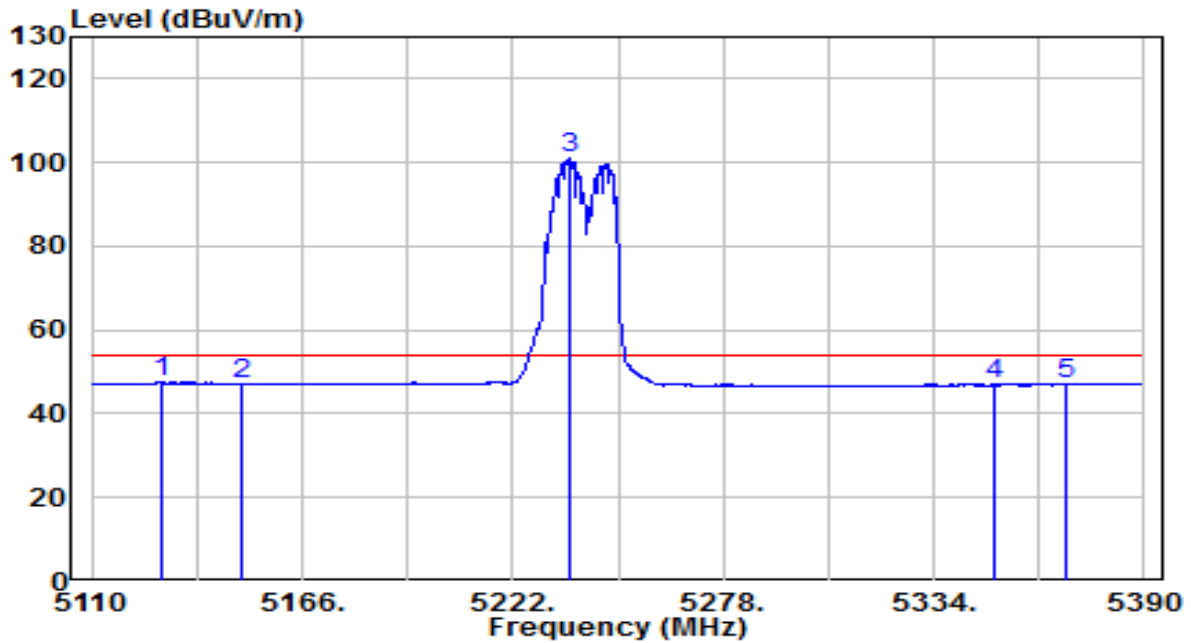


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5128.480	27.55	19.88	47.44	-6.56	54.00	Average
2	5150.040	27.28	19.91	47.19	-6.81	54.00	Average
3	5237.120	80.84	20.00	100.84	N/A	N/A	Average
4	5350.000	26.74	20.11	46.85	-7.15	54.00	Average
5	5369.140	26.97	20.13	47.10	-6.90	54.00	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)- Preamplifier(dB)+ 16dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	120/60Hz

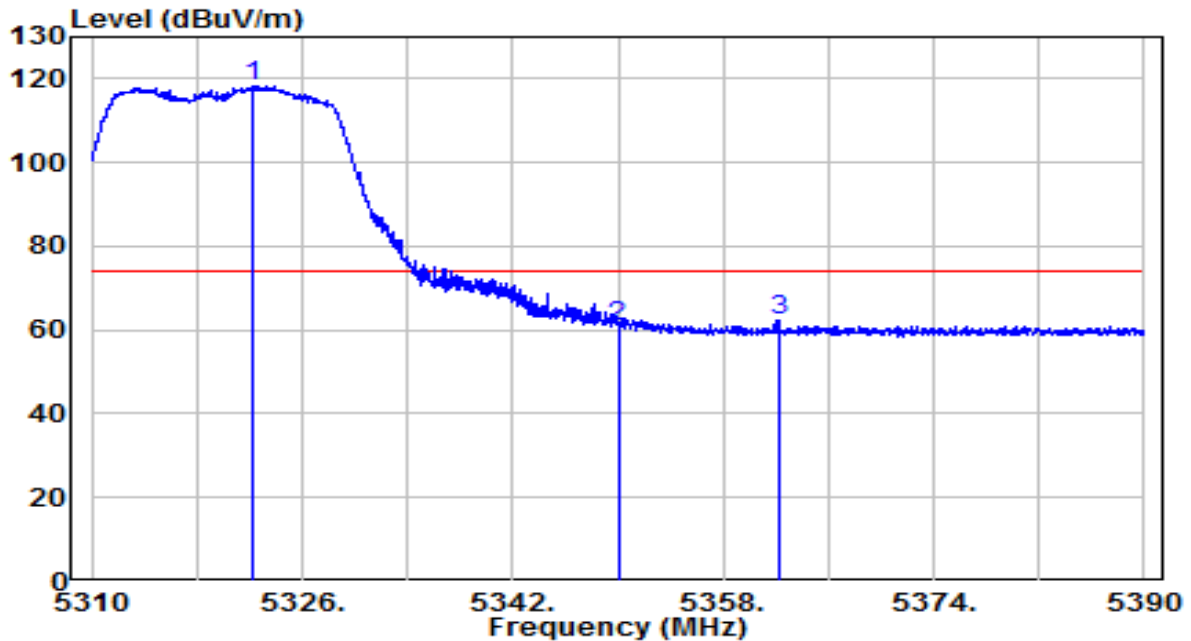


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5322.160	98.29	20.09	118.37	N/A	N/A	Peak
2	5350.000	40.84	20.11	60.95	-13.05	74.00	Peak
3	* 5362.320	42.27	20.13	62.40	-11.60	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	120/60Hz

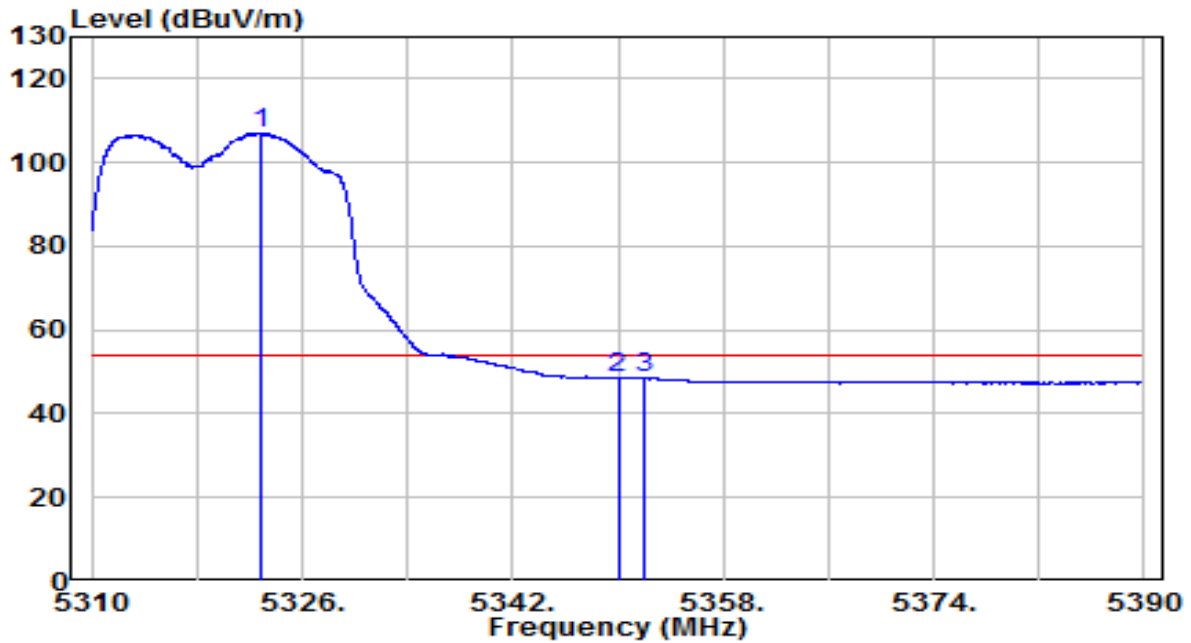


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5322.800	86.90	20.09	106.99	N/A	N/A	Average
2	5350.000	28.43	20.11	48.54	-5.46	54.00	Average
3	* 5352.000	28.46	20.12	48.57	-5.43	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	120/60Hz

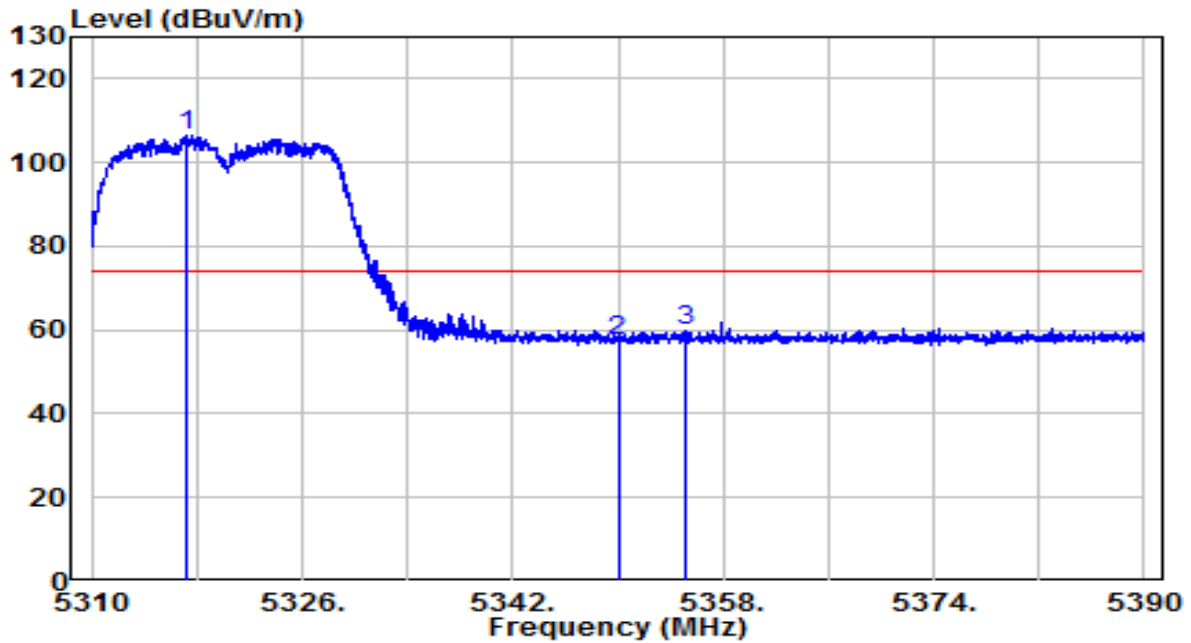


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5317.200	86.41	20.08	106.49	N/A	N/A	Peak
2	5350.000	37.04	20.11	57.15	-16.85	74.00	Peak
3	* 5355.040	39.63	20.12	59.75	-14.25	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	120/60Hz

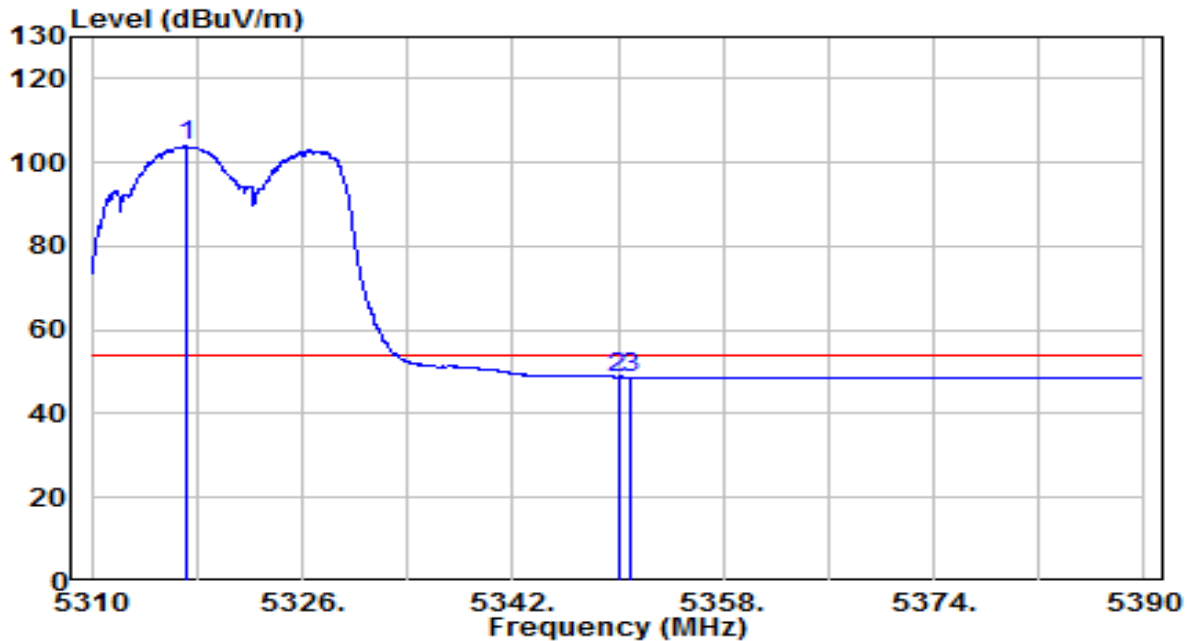


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5317.160	83.81	20.08	103.89	N/A	N/A	Average
2	5350.000	28.65	20.11	48.77	-5.23	54.00	Average
3	* 5351.040	28.67	20.12	48.78	-5.22	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	120/60Hz

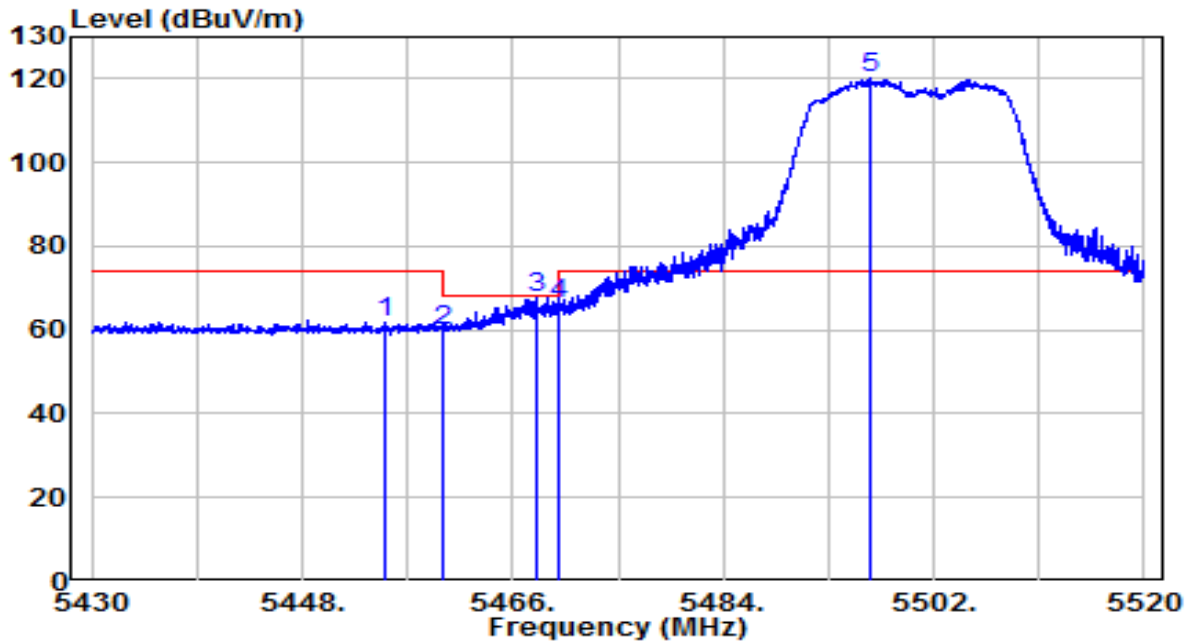


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5454.975	41.53	20.22	61.76	-12.24	74.00	Peak
2	5460.000	39.70	20.23	59.93	-8.27	68.20	Peak
3	* 5468.025	47.64	20.24	67.87	-0.33	68.20	Peak
4	5470.000	46.19	20.24	66.43	-1.77	68.20	Peak
5	5496.555	99.89	20.27	120.15	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)- Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	120/60Hz

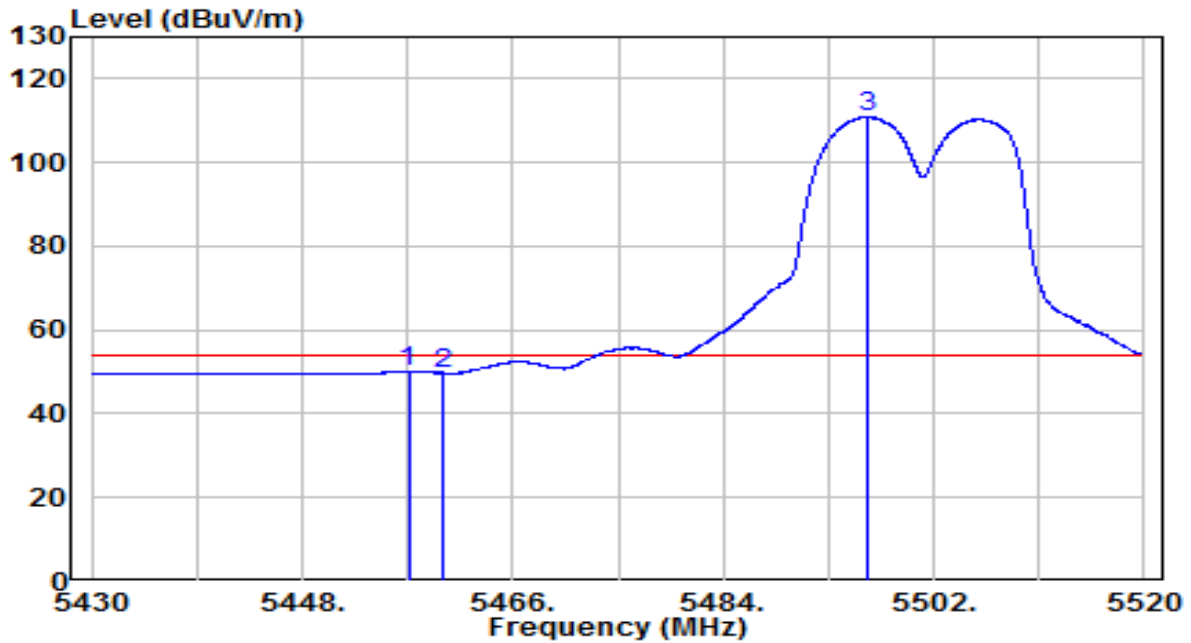


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	5457.090	29.94	20.23	50.17	-3.83	54.00	Average
2		5460.000	29.53	20.23	49.76	-4.24	54.00	Average
3		5496.330	90.59	20.27	110.86	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	120/60Hz

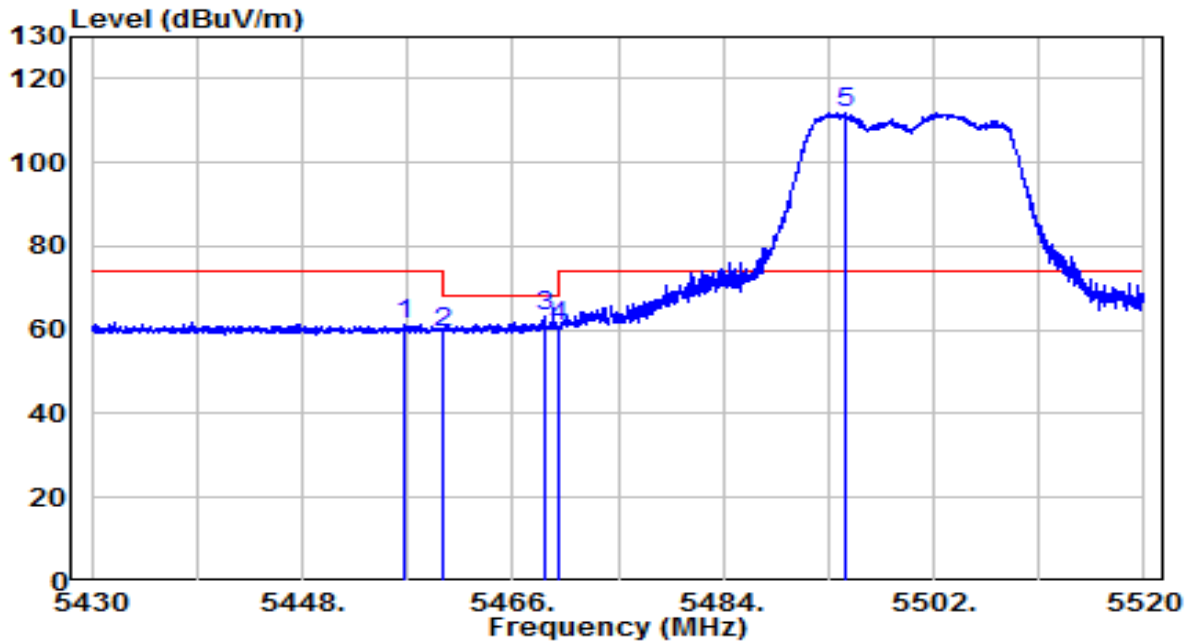


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5456.685	41.00	20.22	61.22	-12.78	74.00	Peak
2	5460.000	38.98	20.23	59.21	-8.99	68.20	Peak
3	* 5468.655	42.94	20.24	63.17	-5.03	68.20	Peak
4	5470.000	40.51	20.24	60.75	-7.45	68.20	Peak
5	5494.350	91.64	20.26	111.90	N/A	N/A	Peak

Note:

- "*" , means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)- Preamplifier(dB)+ 16dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	120/60Hz

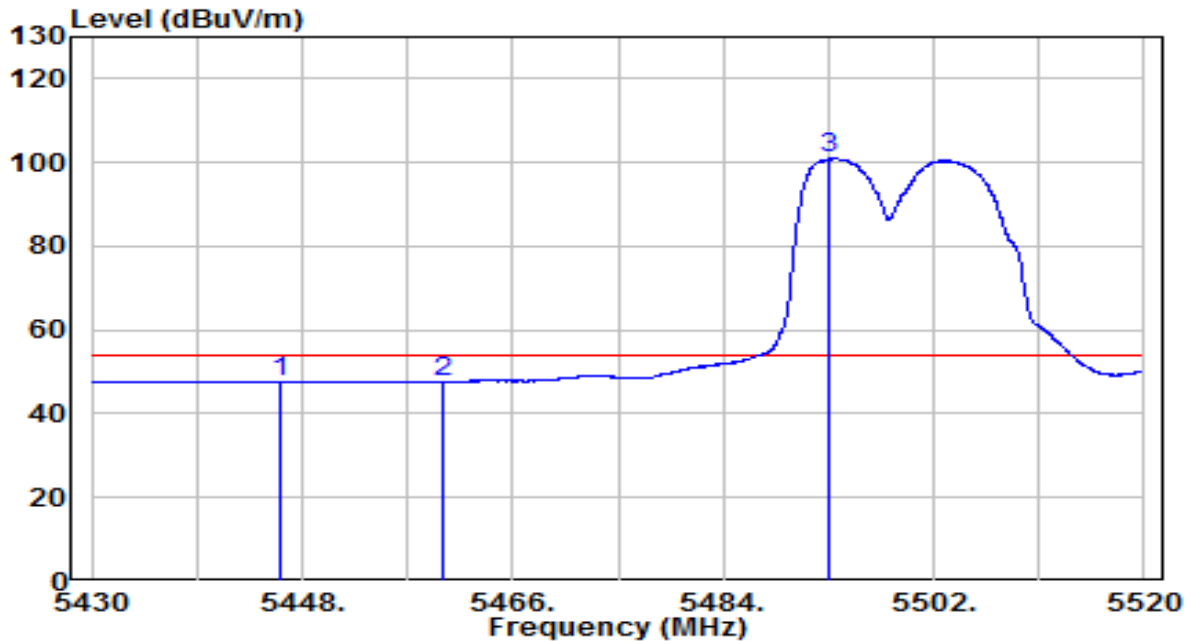


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	27.45	20.21	47.66	-6.34	54.00	Average
2		27.37	20.23	47.60	-6.40	54.00	Average
3		80.78	20.26	101.04	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5700MHz	Test Voltage	120/60Hz

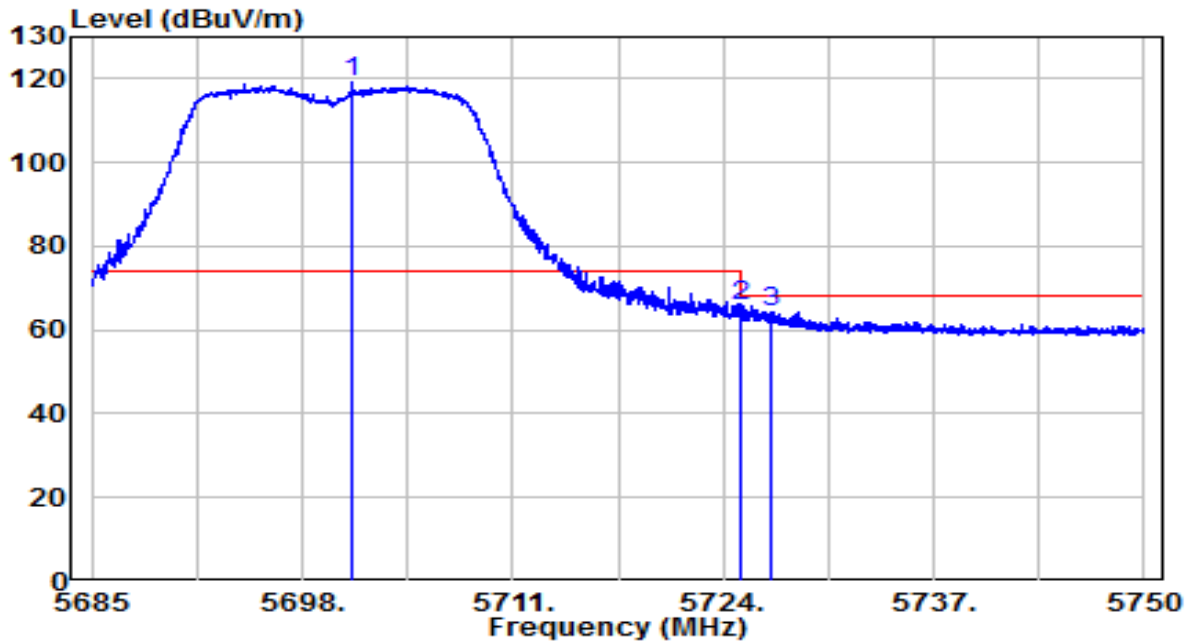


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5701.152	98.13	20.92	119.05	N/A	N/A	Peak
2	* 5725.000	44.66	21.00	65.66	-2.54	68.20	Peak
3	5726.925	43.41	21.01	64.41	-3.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5700MHz	Test Voltage	120/60Hz

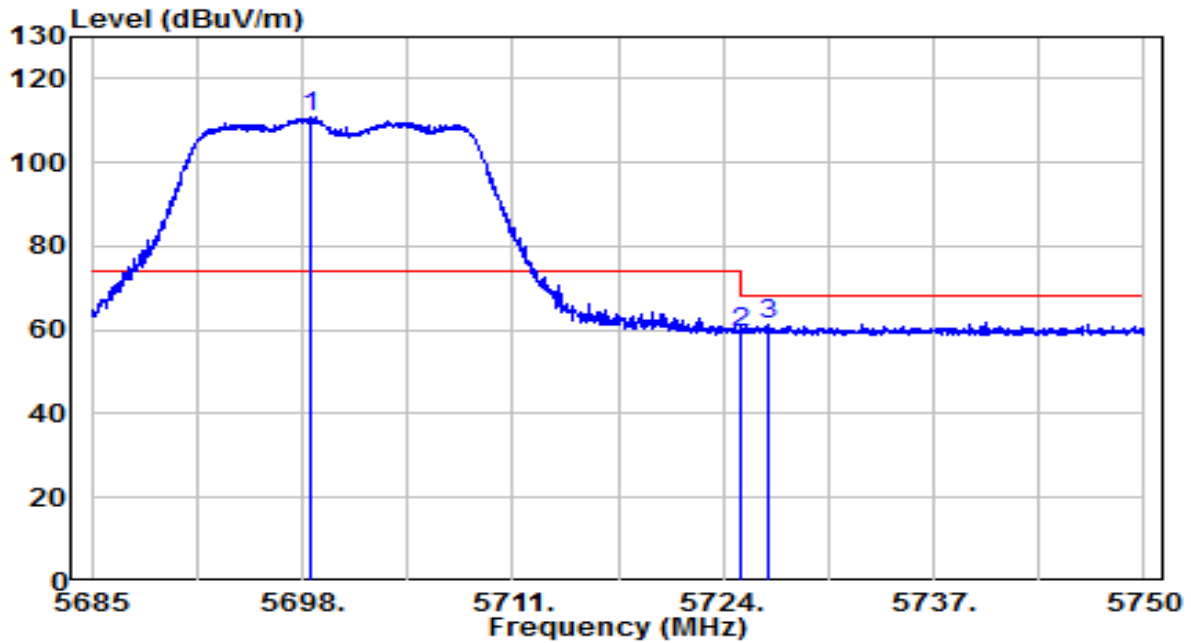


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5698.520	90.08	20.91	110.99	N/A	N/A	Peak
2	5725.000	38.28	21.00	59.28	-8.92	68.20	Peak
3	* 5726.860	40.13	21.01	61.14	-7.06	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	120/60Hz

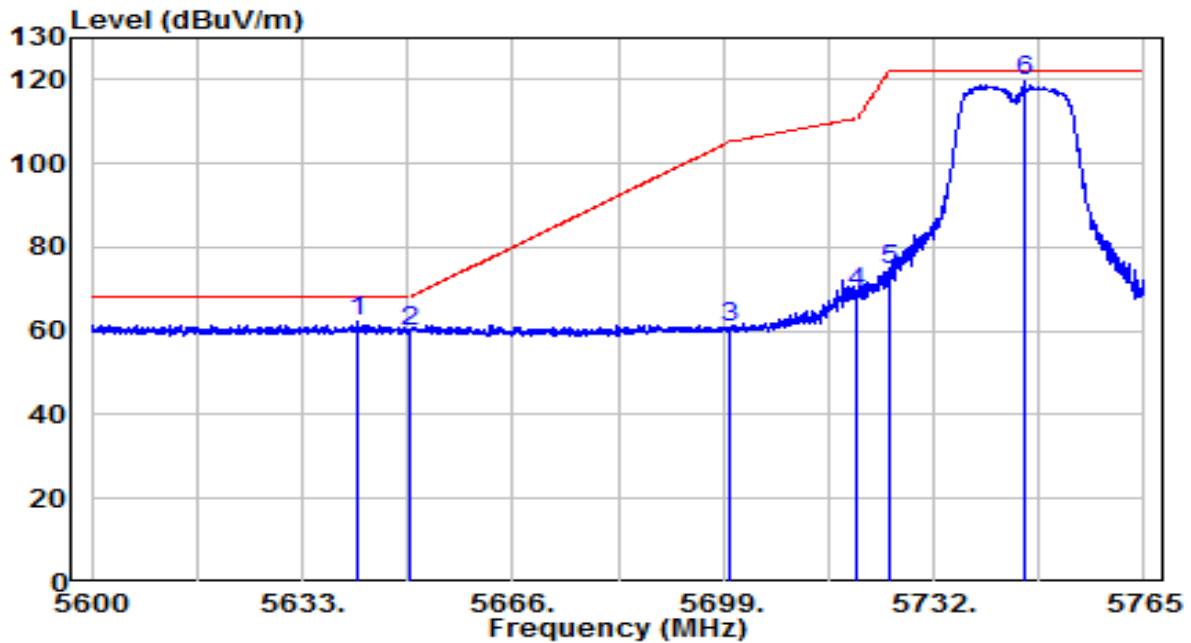


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5641.828	41.38	20.73	62.11	-6.09	68.20	Peak
2	5650.000	39.26	20.76	60.02	-8.18	68.20	Peak
3	5700.000	39.83	20.92	60.74	-44.46	105.20	Peak
4	5720.000	48.02	20.98	69.00	-41.80	110.80	Peak
5	5725.000	53.61	21.00	74.61	-47.59	122.20	Peak
6	5746.107	98.46	21.07	119.53	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	120/60Hz

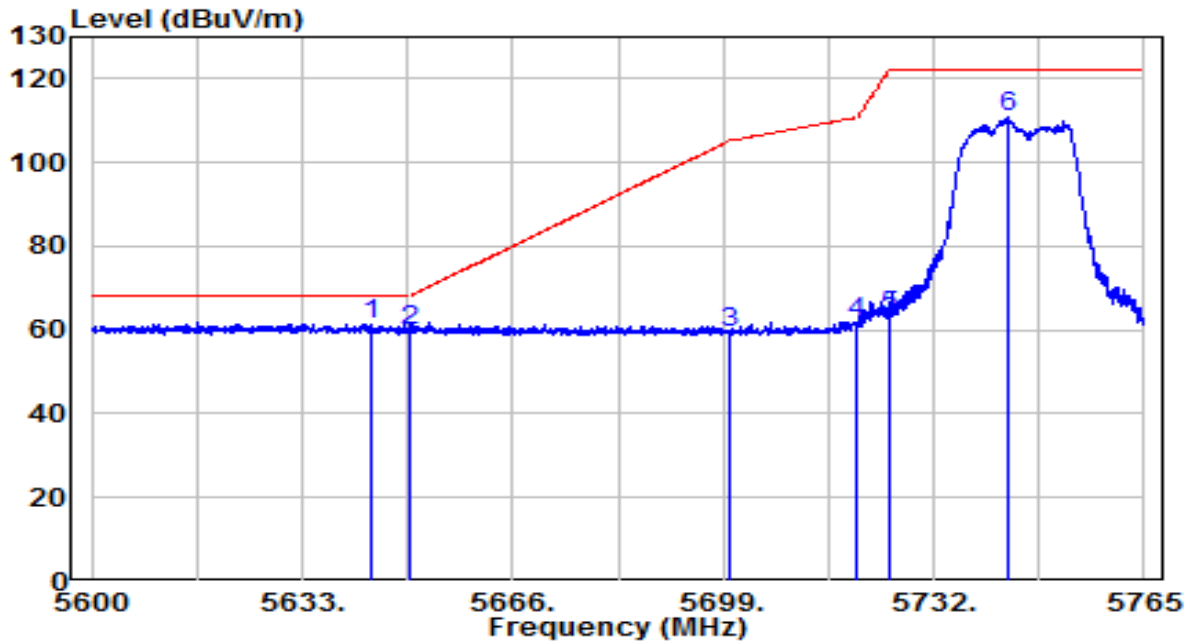


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5643.808	40.73	20.74	61.47	-6.73	68.20	Peak
2	5650.000	39.13	20.76	59.88	-8.32	68.20	Peak
3	5700.000	38.38	20.92	59.30	-45.90	105.20	Peak
4	5720.000	40.77	20.98	61.75	-49.05	110.80	Peak
5	5725.000	42.32	21.00	63.32	-58.88	122.20	Peak
6	5743.797	89.58	21.06	110.64	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	120/60Hz

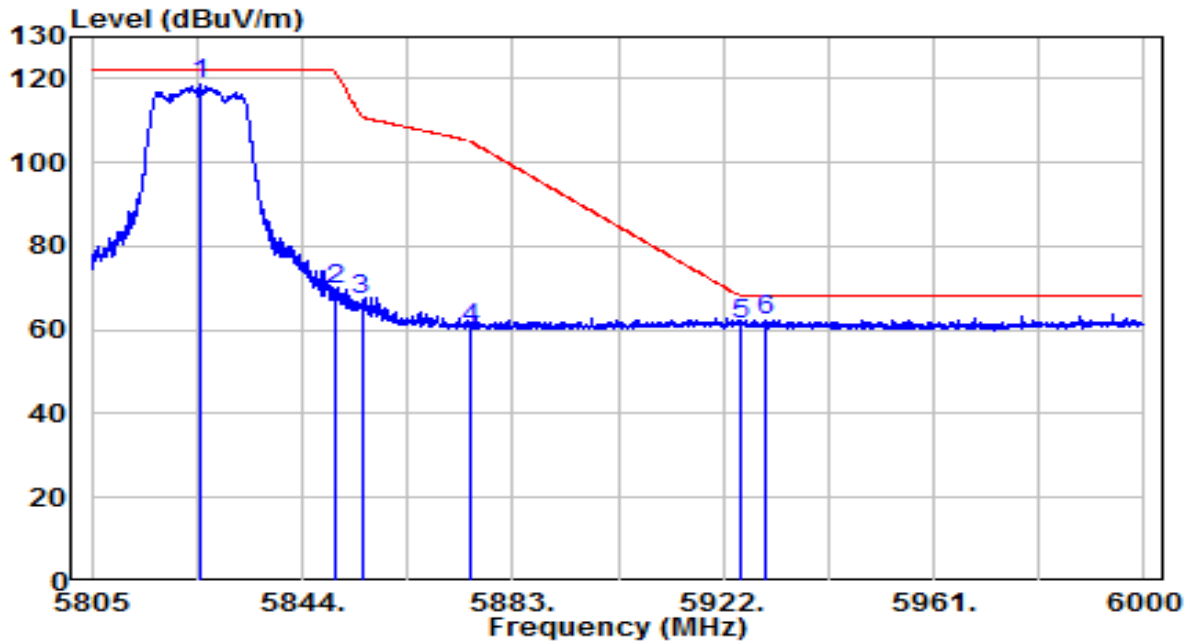


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5825.280	97.16	21.32	118.48	N/A	N/A	Peak
2	5850.045	48.42	21.40	69.83	-52.27	122.10	Peak
3	5855.000	45.81	21.42	67.23	-43.57	110.80	Peak
4	5875.000	38.93	21.49	60.41	-44.79	105.20	Peak
5	5925.000	39.76	21.65	61.40	-6.80	68.20	Peak
6	* 5929.703	40.84	21.66	62.50	-5.70	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	120/60Hz

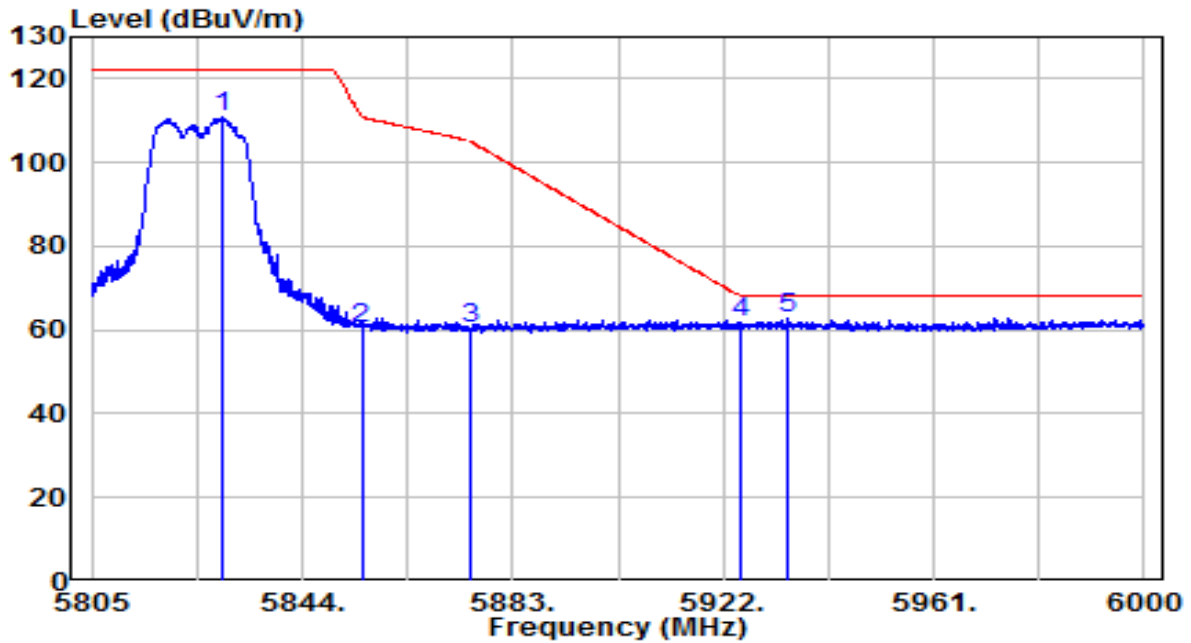


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5829.277	89.35	21.34	110.68	N/A	N/A	Peak
2	5855.000	39.08	21.42	60.50	-50.30	110.80	Peak
3	5875.000	38.70	21.49	60.19	-45.01	105.20	Peak
4	5925.000	40.02	21.65	61.67	-6.53	68.20	Peak
5	* 5933.993	41.13	21.68	62.81	-5.39	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)- Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120/60Hz

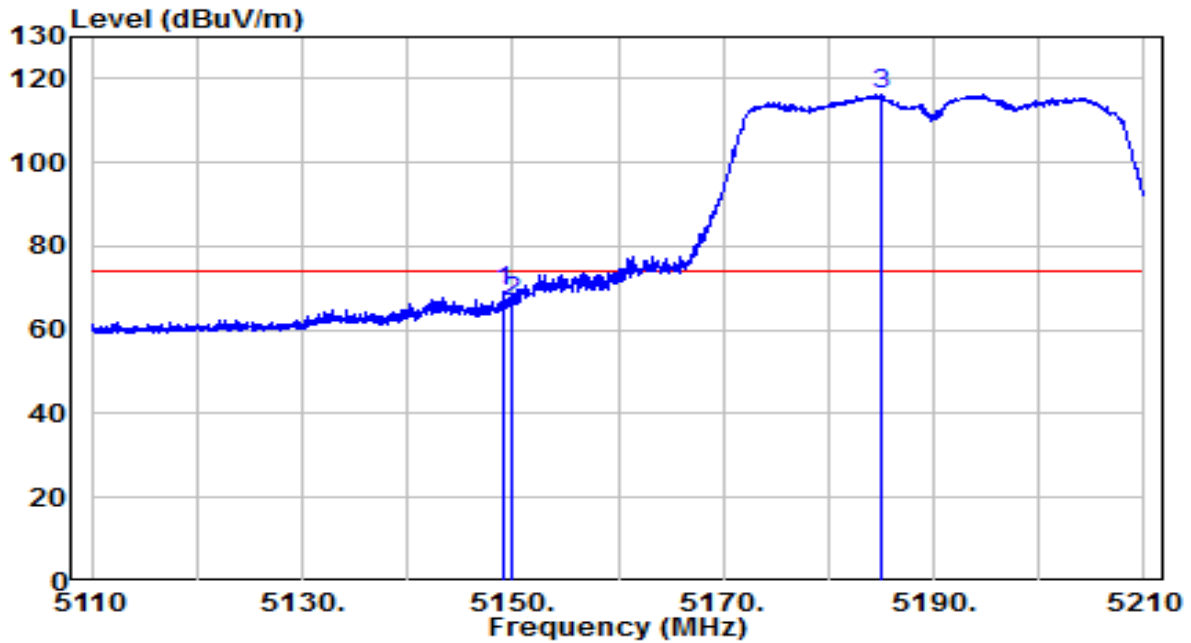


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5149.100	49.34	19.91	69.24	-4.76	74.00	Peak
2	5150.000	46.59	19.91	66.50	-7.50	74.00	Peak
3	5184.900	96.36	19.94	116.30	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120/60Hz

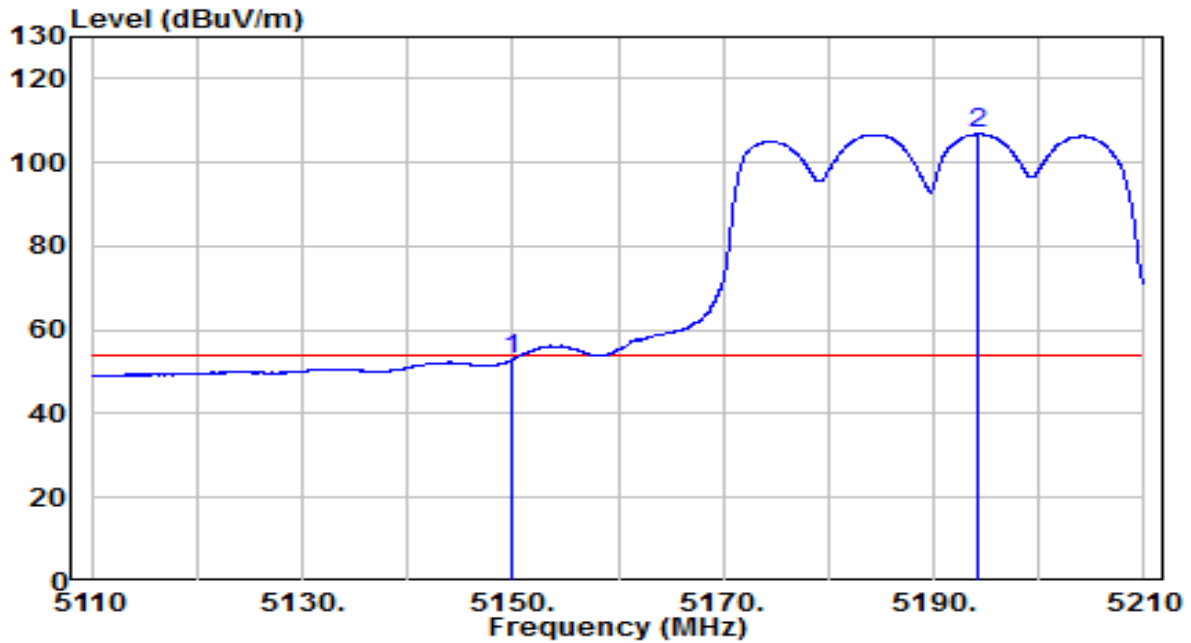


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5150.000	33.04	19.91	52.94	-1.06	54.00	Average
2	5194.250	86.86	19.95	106.82	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120/60Hz

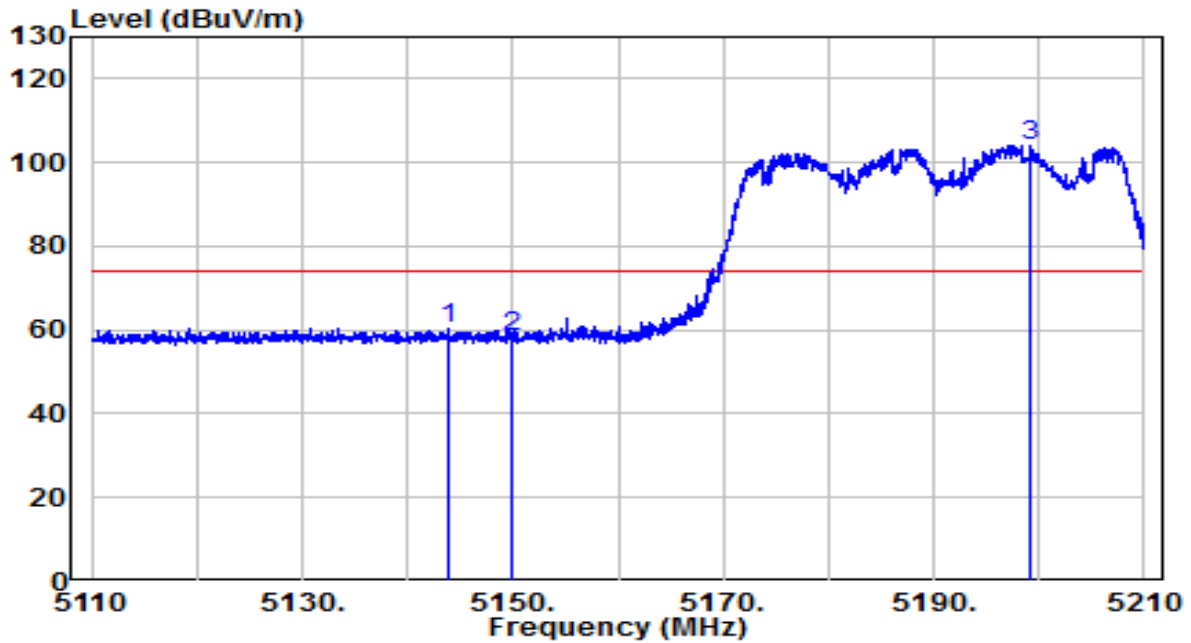


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	5143.950	40.37	19.90	60.27	-13.73	74.00	Peak
2		5150.000	38.24	19.91	58.14	-15.86	74.00	Peak
3		5199.150	84.23	19.96	104.19	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)- Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120/60Hz

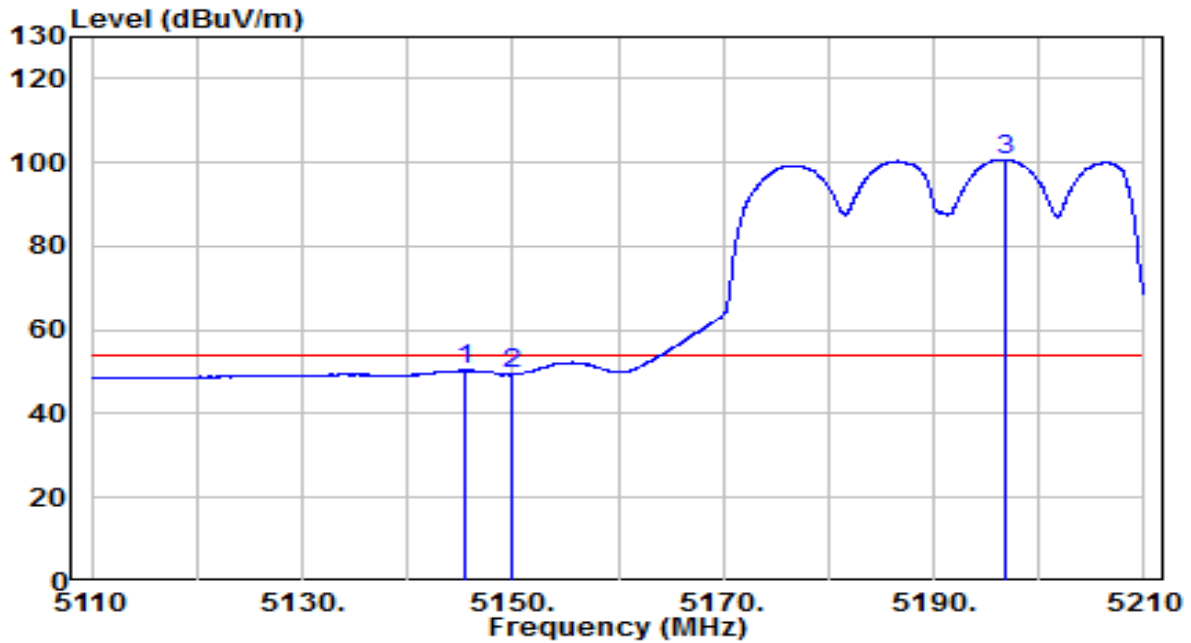


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5145.400	30.43	19.90	50.33	-3.67	54.00	Average
2	5150.000	29.41	19.91	49.32	-4.68	54.00	Average
3	5196.700	80.79	19.95	100.75	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5230MHz	Test Voltage	120/60Hz

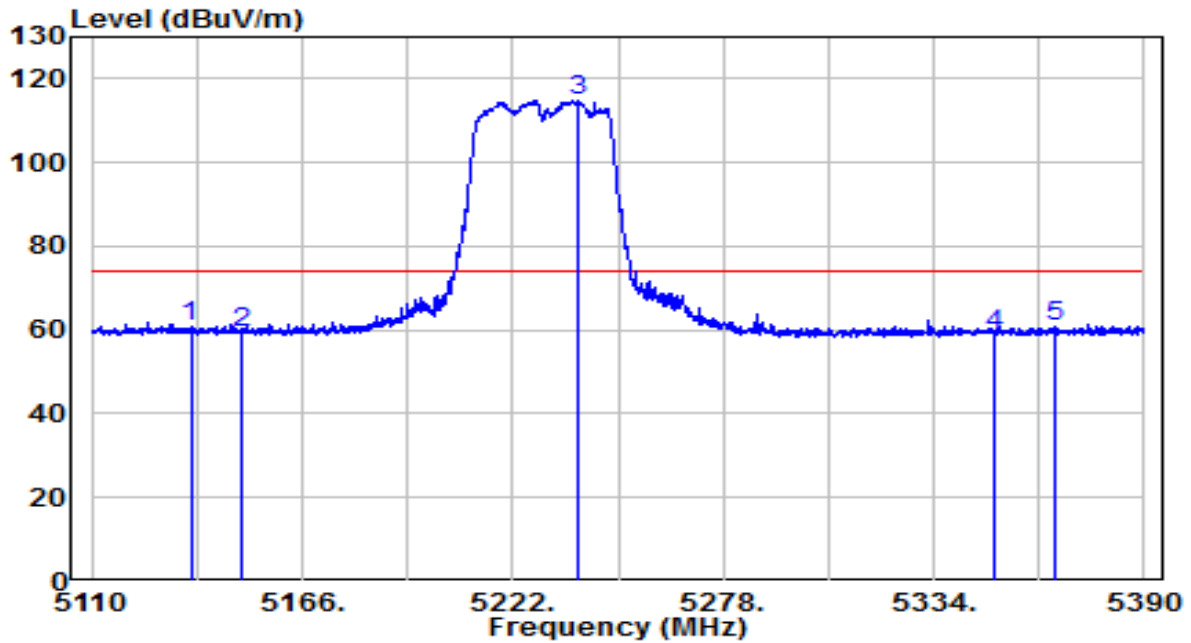


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5136.320	41.02	19.89	60.91	-13.09	74.00	Peak
2	5150.000	39.62	19.91	59.52	-14.48	74.00	Peak
3	5239.360	95.02	20.00	115.01	N/A	N/A	Peak
4	5350.000	38.76	20.11	58.88	-15.12	74.00	Peak
5	5366.620	40.63	20.13	60.76	-13.24	74.00	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5230MHz	Test Voltage	120/60Hz

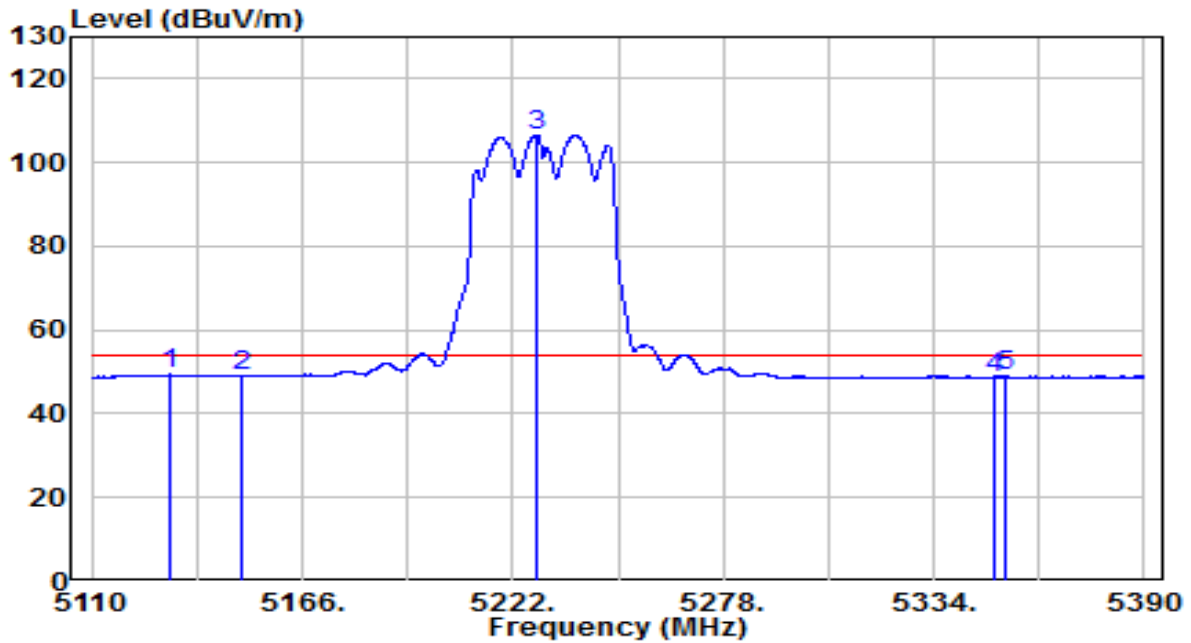


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5131.000	29.43	19.89	49.31	-4.69	54.00	Average
2	5150.000	29.17	19.91	49.07	-4.93	54.00	Average
3	5228.160	86.56	19.99	106.55	N/A	N/A	Average
4	5350.000	28.67	20.11	48.78	-5.22	54.00	Average
5	5353.040	28.79	20.12	48.90	-5.10	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5230MHz	Test Voltage	120/60Hz

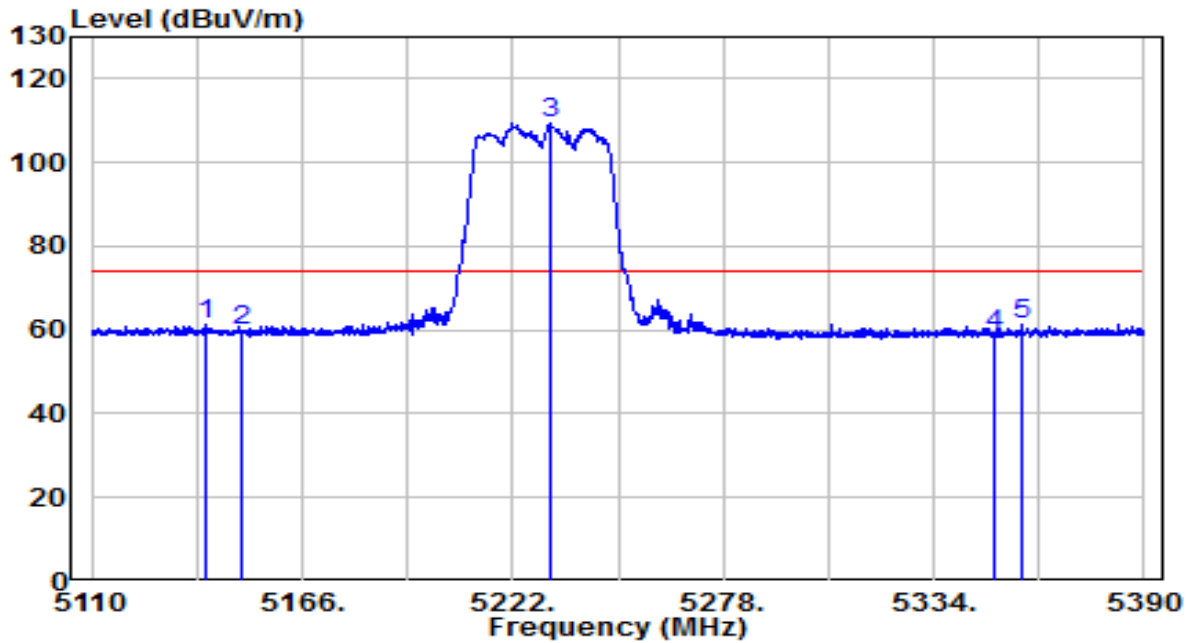


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5140.240	41.31	19.90	61.20	-12.80	74.00	Peak
2	5150.000	39.98	19.91	59.88	-14.12	74.00	Peak
3	5231.800	89.42	19.99	109.41	N/A	N/A	Peak
4	5350.000	38.93	20.11	59.05	-14.95	74.00	Peak
5	5357.240	41.05	20.12	61.18	-12.82	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5230MHz	Test Voltage	120/60Hz

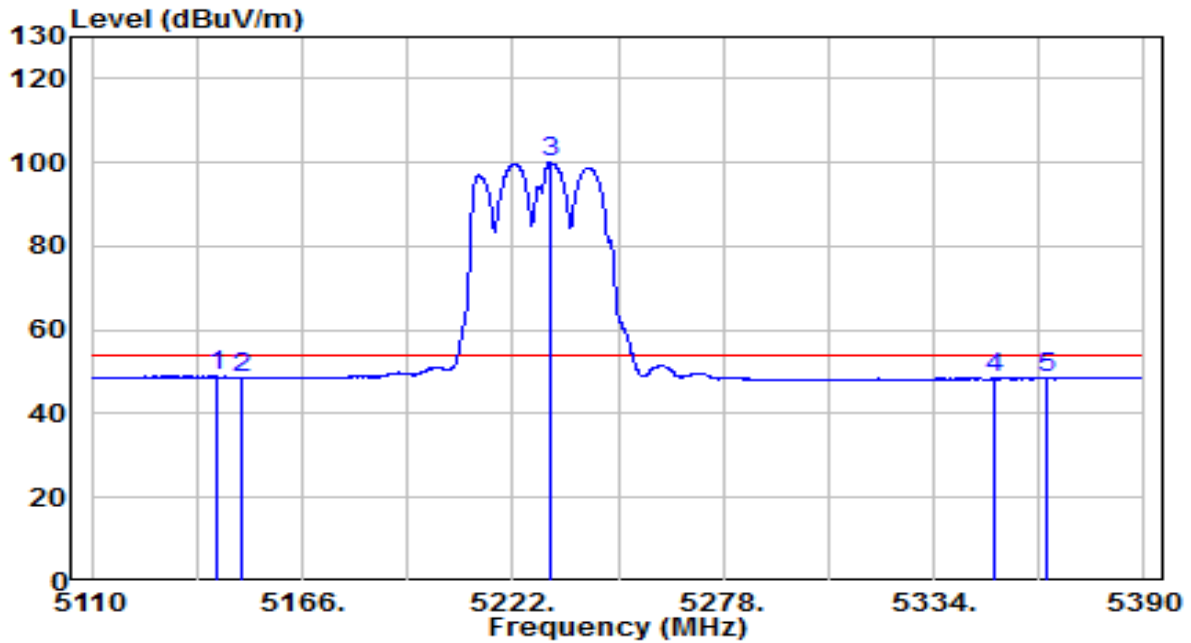


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	5143.320	28.97	19.90	48.87	-5.13	54.00	Average
2		5150.000	28.73	19.91	48.64	-5.36	54.00	Average
3		5231.800	79.85	19.99	99.84	N/A	N/A	Average
4		5350.000	28.30	20.11	48.41	-5.59	54.00	Average
5		5363.820	28.41	20.13	48.54	-5.46	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	120/60Hz

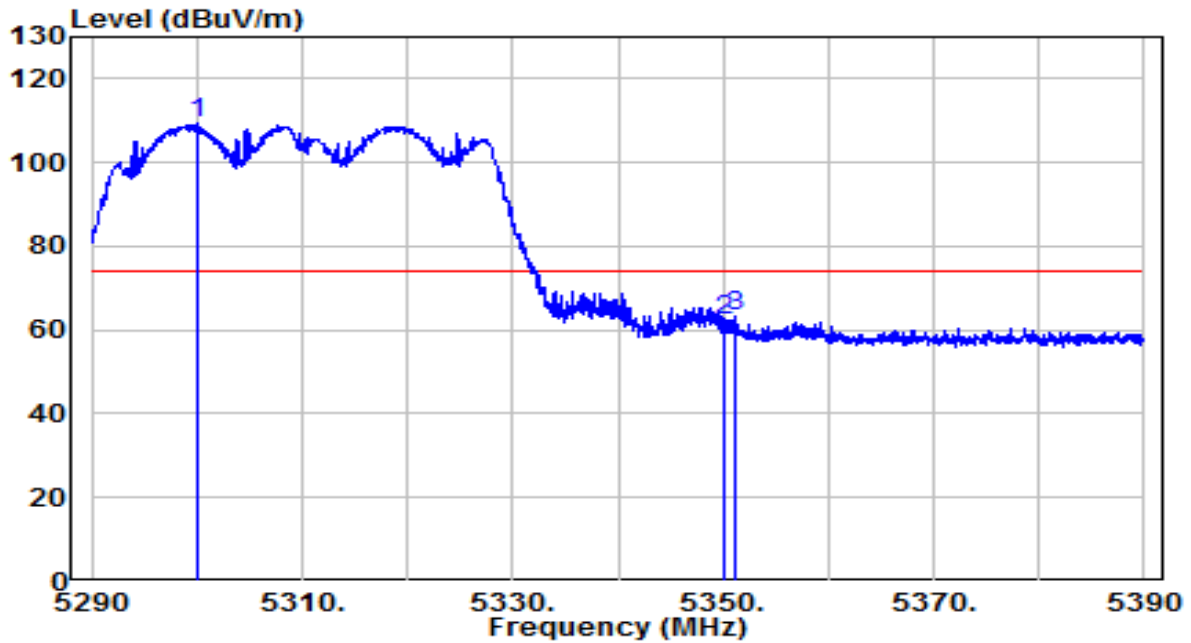


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5300.150	89.39	20.06	109.45	N/A	N/A	Peak
2	5350.000	42.33	20.11	62.44	-11.56	74.00	Peak
3	* 5351.100	42.96	20.12	63.07	-10.93	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	120/60Hz

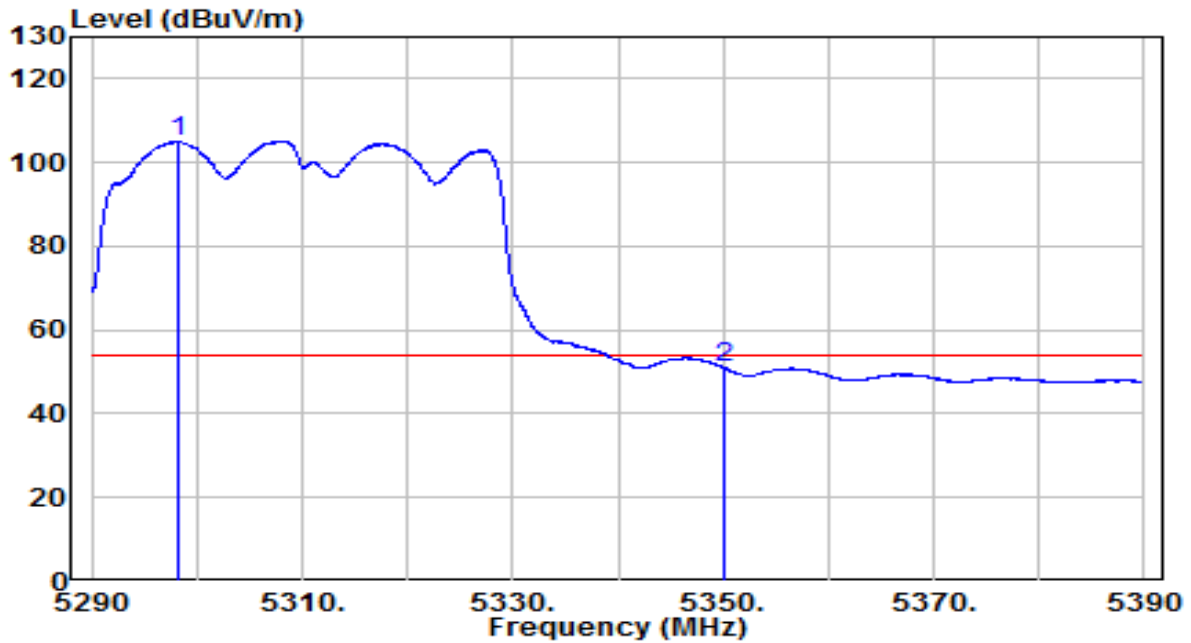

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5298.300	84.86	20.06	104.92	N/A	N/A	Average
2	* 5350.000	30.85	20.11	50.96	-3.04	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.