


EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	120/60Hz

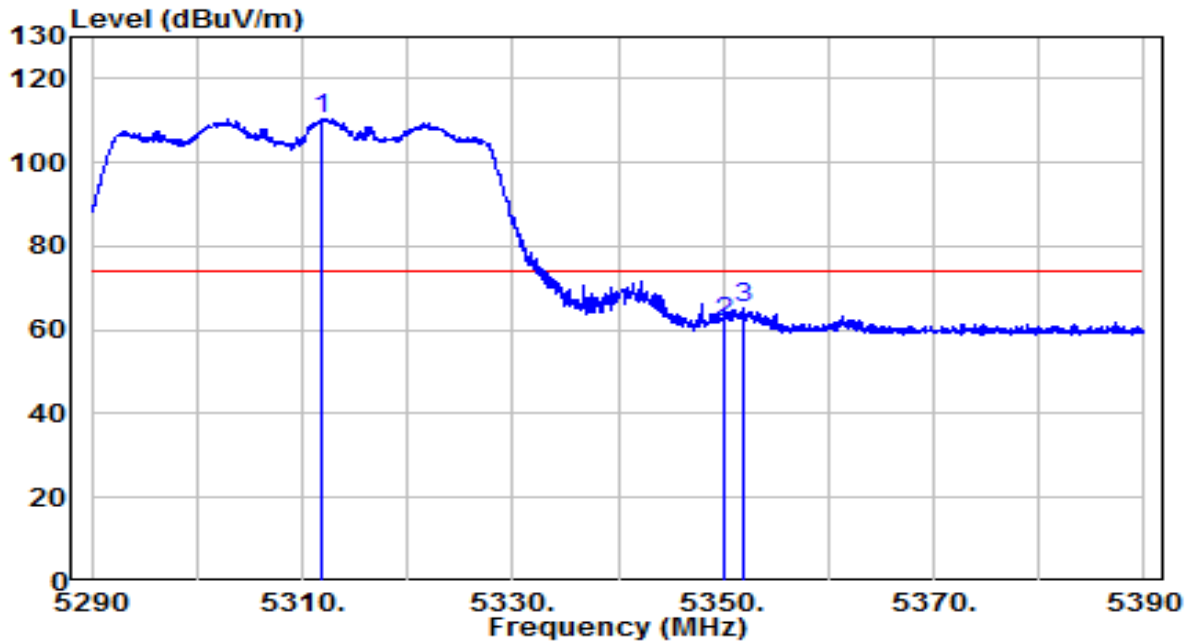


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5311.900	90.45	20.07	110.53	N/A	N/A	Peak
2	5350.000	41.78	20.11	61.90	-12.10	74.00	Peak
3	* 5351.850	45.04	20.12	65.16	-8.84	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	21°C/36%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	120/60Hz

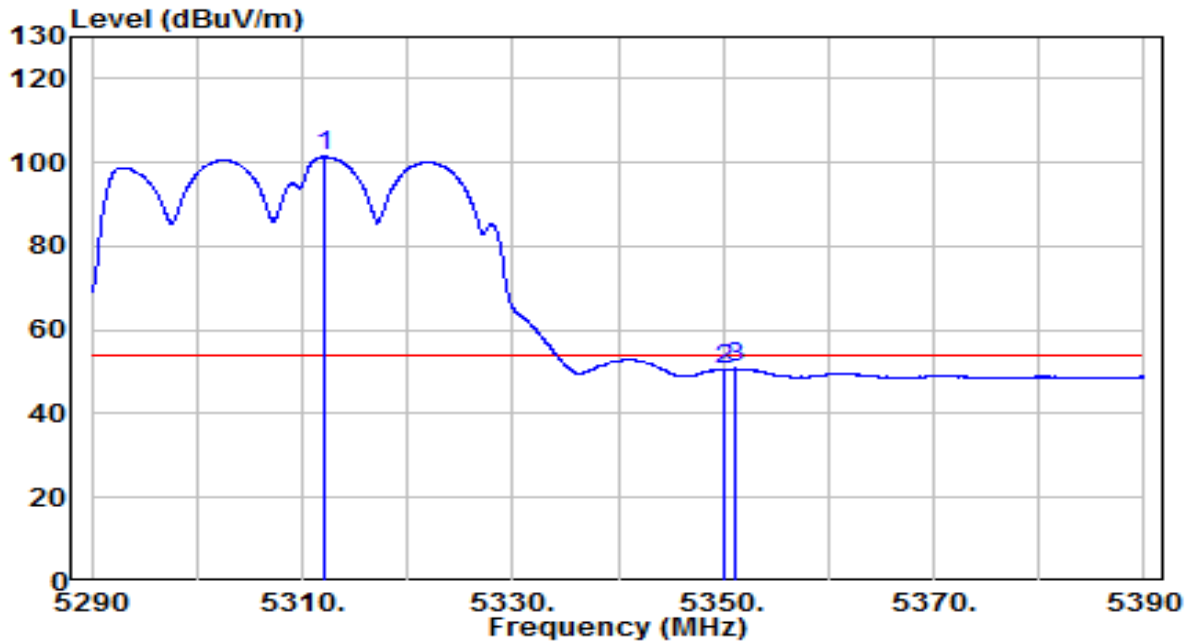


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5312.200	81.27	20.07	101.34	N/A	N/A	Average
2	5350.000	30.63	20.11	50.75	-3.25	54.00	Average
3	* 5351.250	30.68	20.12	50.80	-3.20	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	120V/60Hz

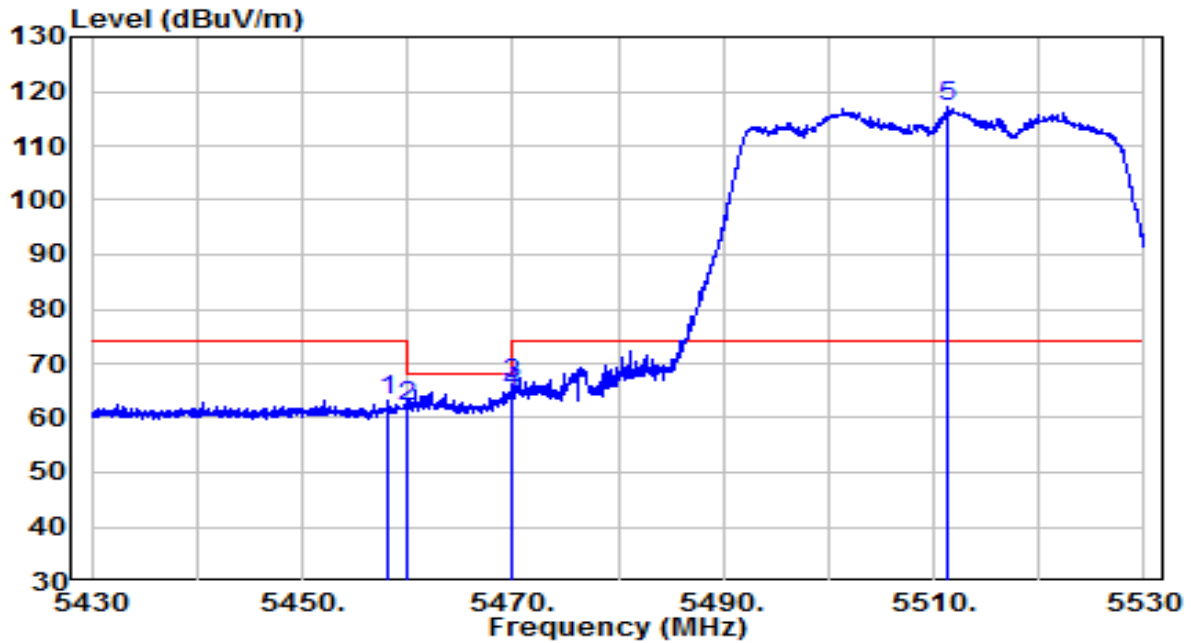


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.250	42.98	20.23	63.21	-10.79	74.00	Peak
2	5460.000	41.80	20.23	62.03	-6.17	68.20	Peak
3	* 5469.800	46.11	20.24	66.35	-1.85	68.20	Peak
4	5470.000	44.48	20.24	64.72	-3.48	68.20	Peak
5	5511.400	96.76	20.31	117.06	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	120V/60Hz

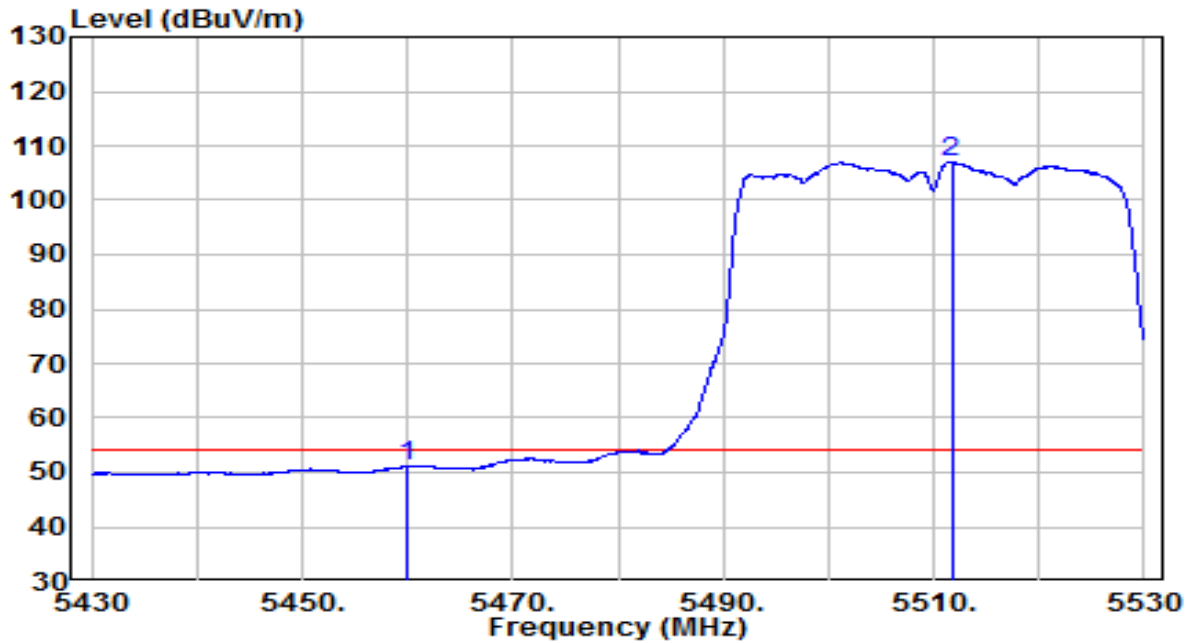


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5460.000	30.86	20.23	51.08	-2.92	54.00	Average
2	5511.700	86.78	20.31	107.09	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	120V/60Hz

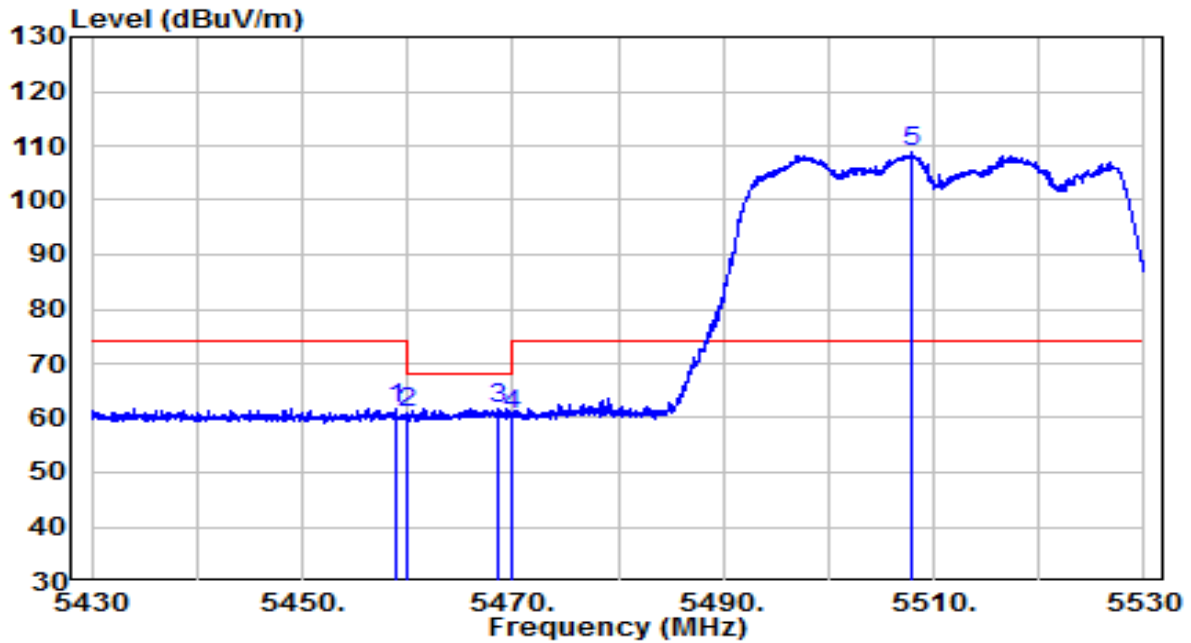


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5458.850	41.54	20.23	61.77	-12.23	74.00	Peak
2	5460.000	40.69	20.23	60.92	-7.28	68.20	Peak
3	* 5468.500	41.56	20.24	61.80	-6.40	68.20	Peak
4	5470.000	40.32	20.24	60.56	-7.64	68.20	Peak
5	5507.850	88.41	20.30	108.70	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	120V/60Hz

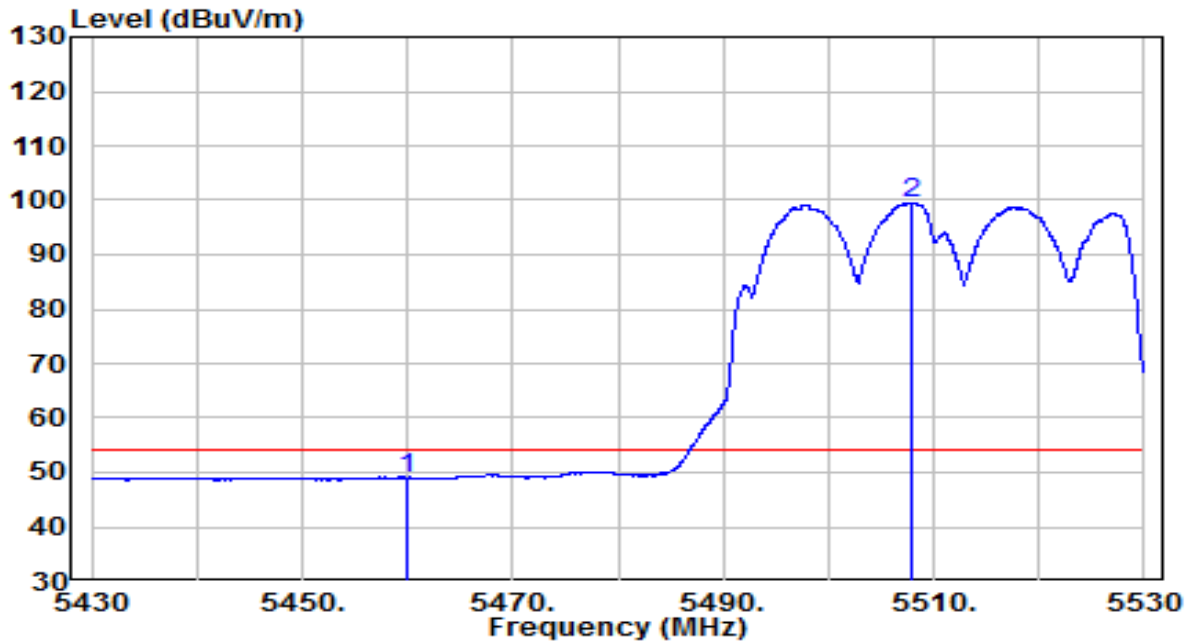


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5460.000	28.72	20.23	48.95	-5.05	54.00	Average
2	5507.950	79.26	20.30	99.55	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	120V/60Hz

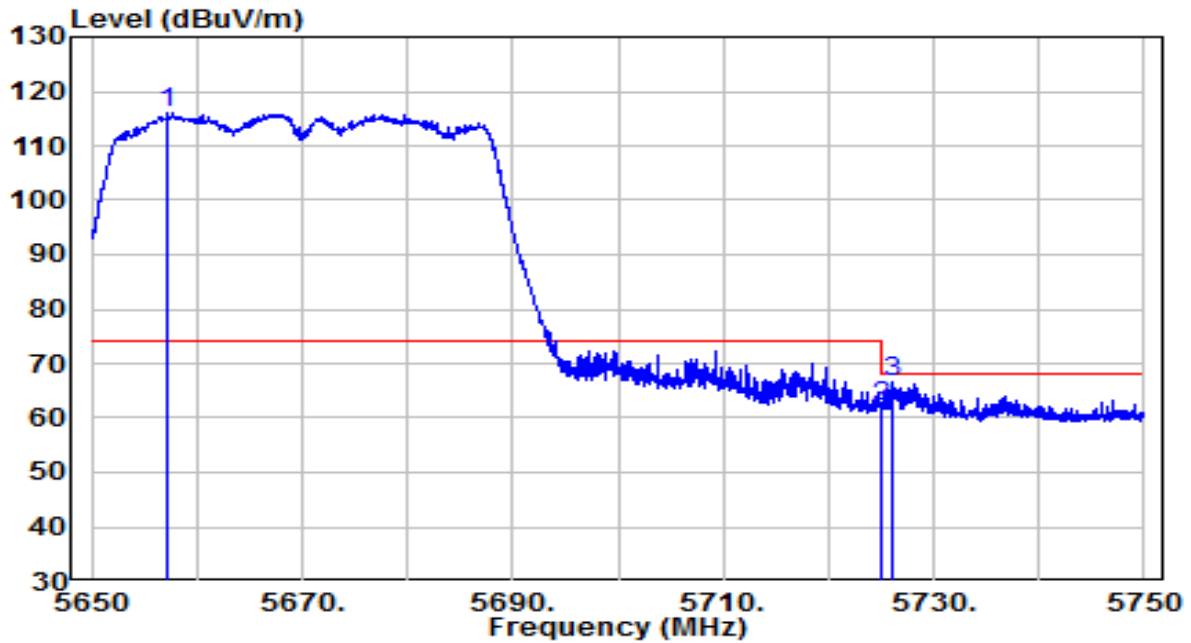


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5657.250	95.38	20.78	116.16	N/A	N/A	Peak
2	5725.000	40.98	21.00	61.98	-6.22	68.20	Peak
3	* 5726.100	45.72	21.00	66.72	-1.48	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	120V/60Hz

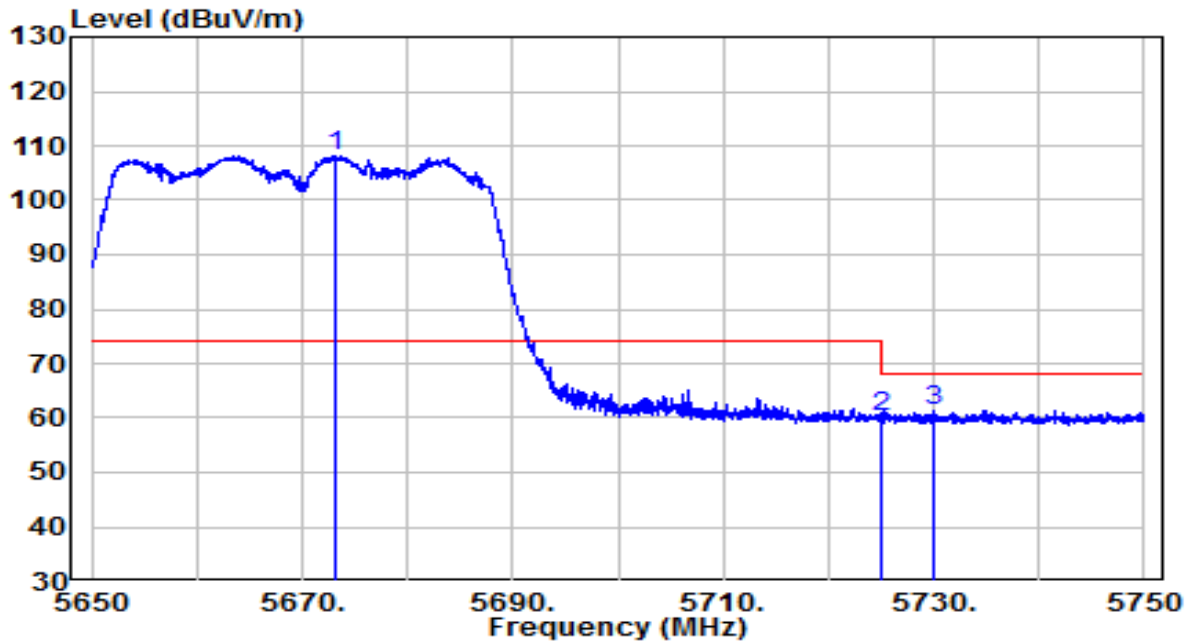


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5673.100	87.26	20.83	108.09	N/A	N/A	Peak
2	5725.000	39.14	21.00	60.14	-8.06	68.20	Peak
3	* 5730.000	40.31	21.02	61.33	-6.87	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	120V/60Hz

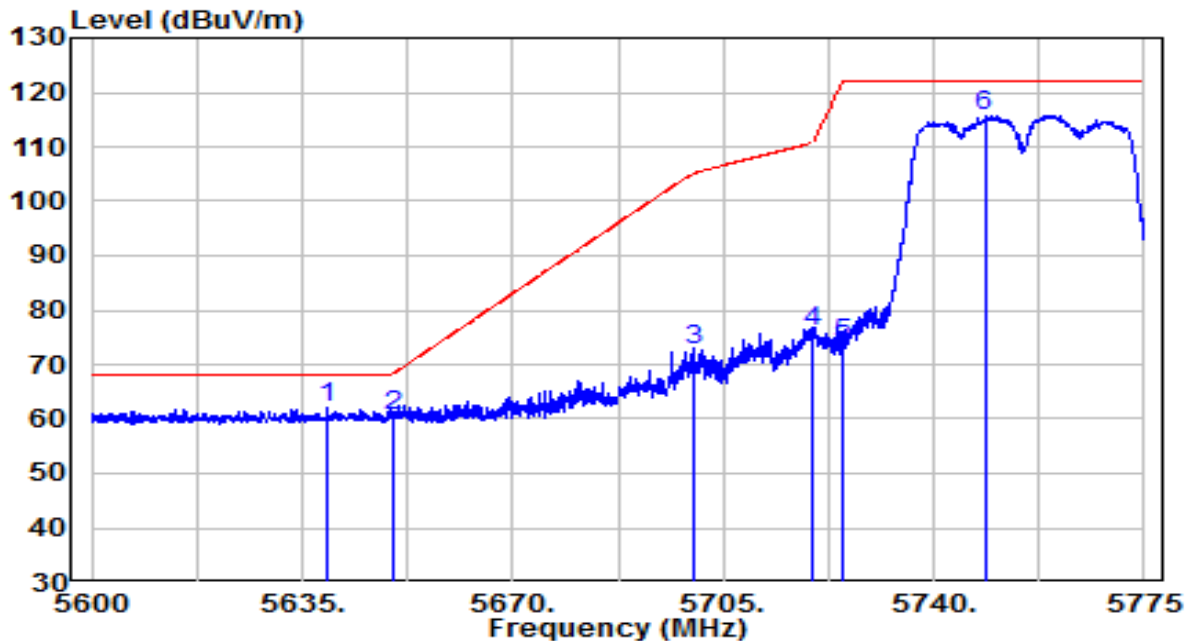


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5639.200	41.28	20.72	62.00	-6.20	68.20	Peak
2	5650.000	39.95	20.76	60.70	-7.50	68.20	Peak
3	5700.013	51.75	20.92	72.66	-32.54	105.20	Peak
4	5720.000	55.16	20.98	76.14	-34.66	110.80	Peak
5	5725.000	52.61	21.00	73.61	-48.59	122.20	Peak
6	5748.487	94.73	21.08	115.81	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	120V/60Hz

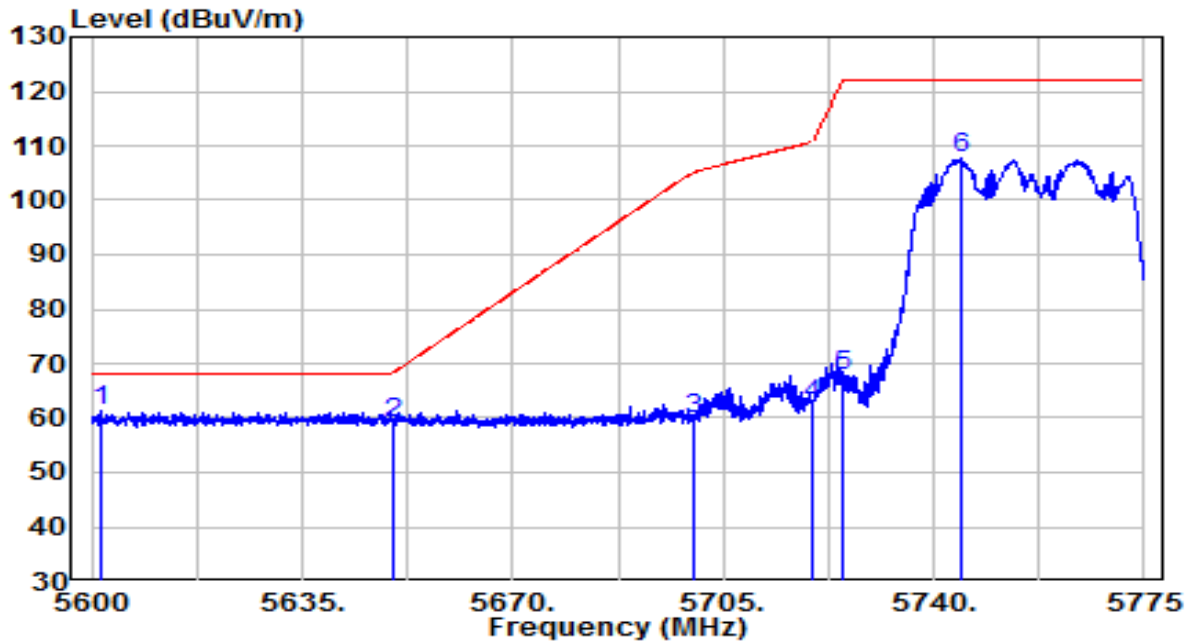


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5601.575	40.64	20.60	61.24	-6.96	68.20	Peak
2	5650.000	38.18	20.76	58.93	-9.27	68.20	Peak
3	5700.000	38.89	20.92	59.81	-45.39	105.20	Peak
4	5720.000	41.65	20.98	62.63	-48.17	110.80	Peak
5	5725.000	46.86	21.00	67.86	-54.34	122.20	Peak
6	5744.462	86.58	21.06	107.64	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	120V/60Hz

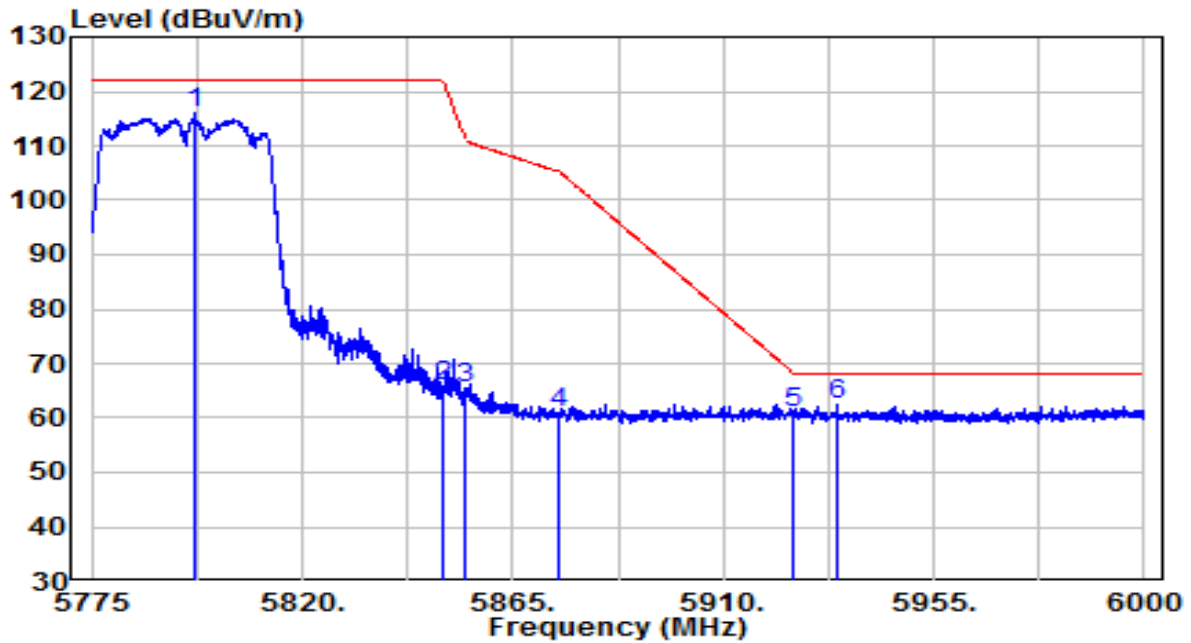


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5797.050	94.81	21.23	116.05	N/A	N/A	Peak
2	5850.000	44.34	21.40	65.75	-56.45	122.20	Peak
3	5855.000	43.97	21.42	65.39	-45.41	110.80	Peak
4	5875.000	39.31	21.49	60.80	-44.40	105.20	Peak
5	5925.000	39.29	21.65	60.94	-7.26	68.20	Peak
6	* 5934.413	40.68	21.68	62.35	-5.85	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	120V/60Hz

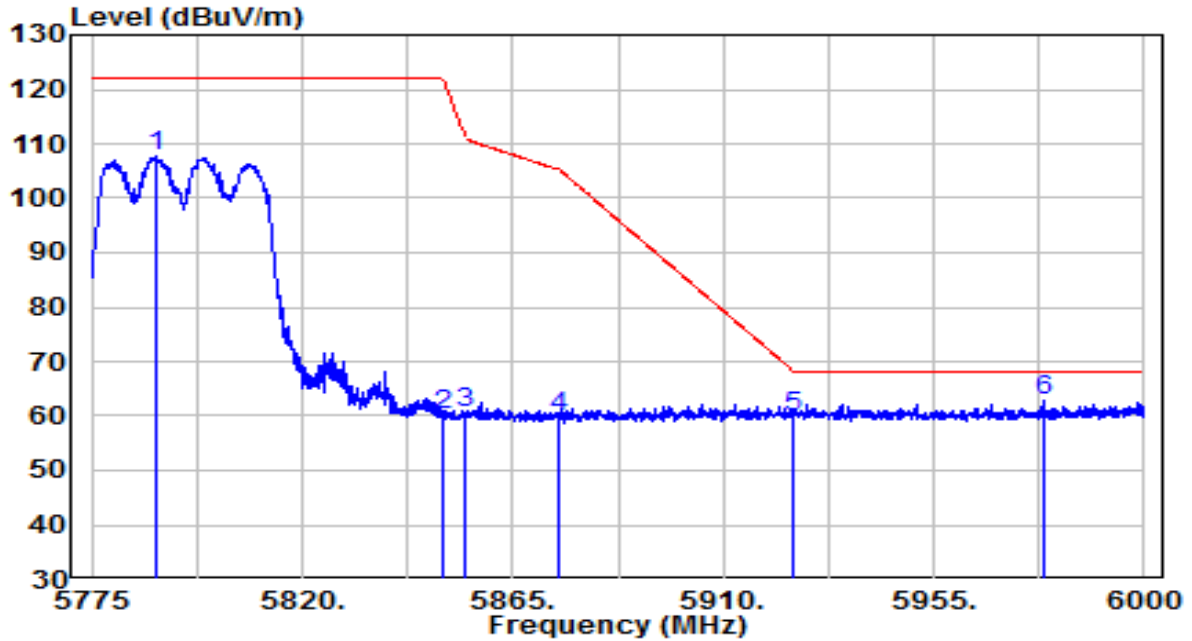


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5788.837	86.43	21.21	107.64	N/A	N/A	Peak
2	5850.000	38.77	21.40	60.17	-62.03	122.20	Peak
3	5855.000	39.00	21.42	60.42	-50.38	110.80	Peak
4	5875.000	38.43	21.49	59.91	-45.29	105.20	Peak
5	5925.000	38.33	21.65	59.97	-8.23	68.20	Peak
6	* 5978.850	40.94	21.82	62.76	-5.44	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	120V/60Hz

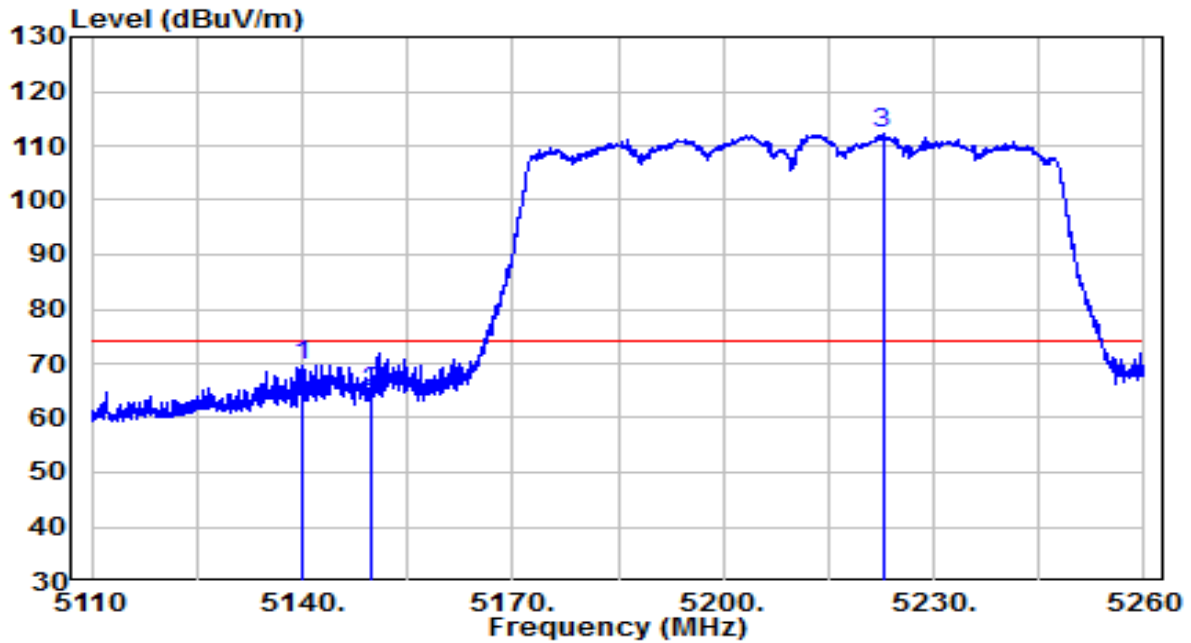


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	5140.075	49.81	19.90	69.70	-4.30	74.00	Peak
2		5150.000	44.95	19.91	64.85	-9.15	74.00	Peak
3		5222.725	92.17	19.98	112.15	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)- Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	120V/60Hz

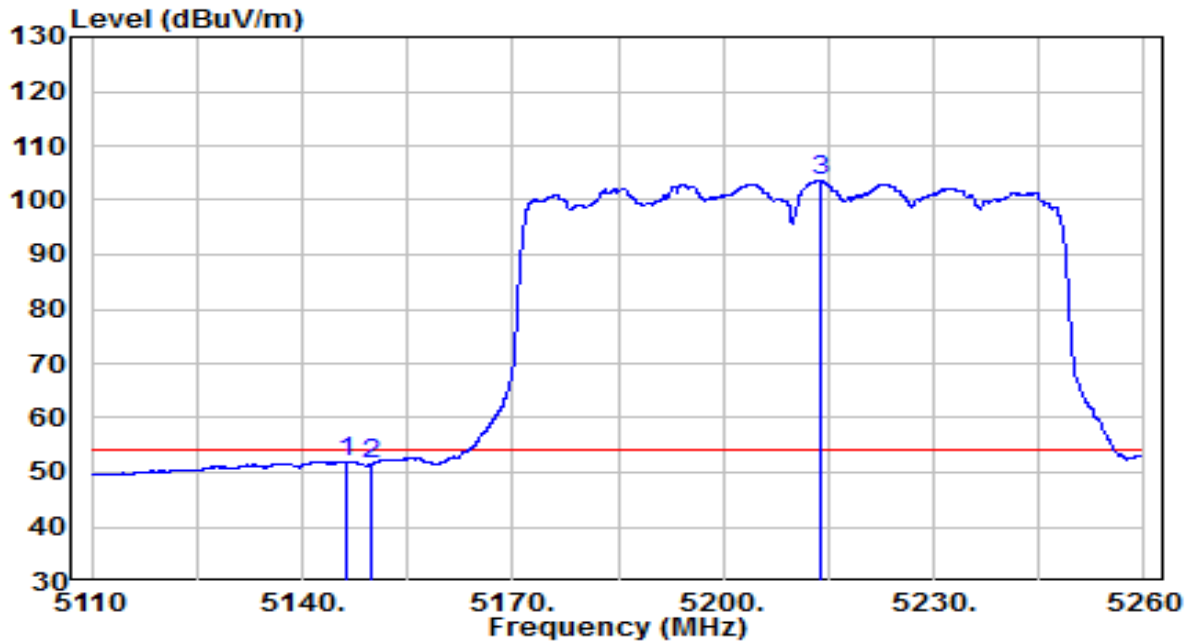


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	5146.375	32.16	19.90	52.06	-1.94	54.00	Average
2		5150.000	31.67	19.91	51.58	-2.42	54.00	Average
3		5213.725	83.60	19.97	103.58	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	120V/60Hz

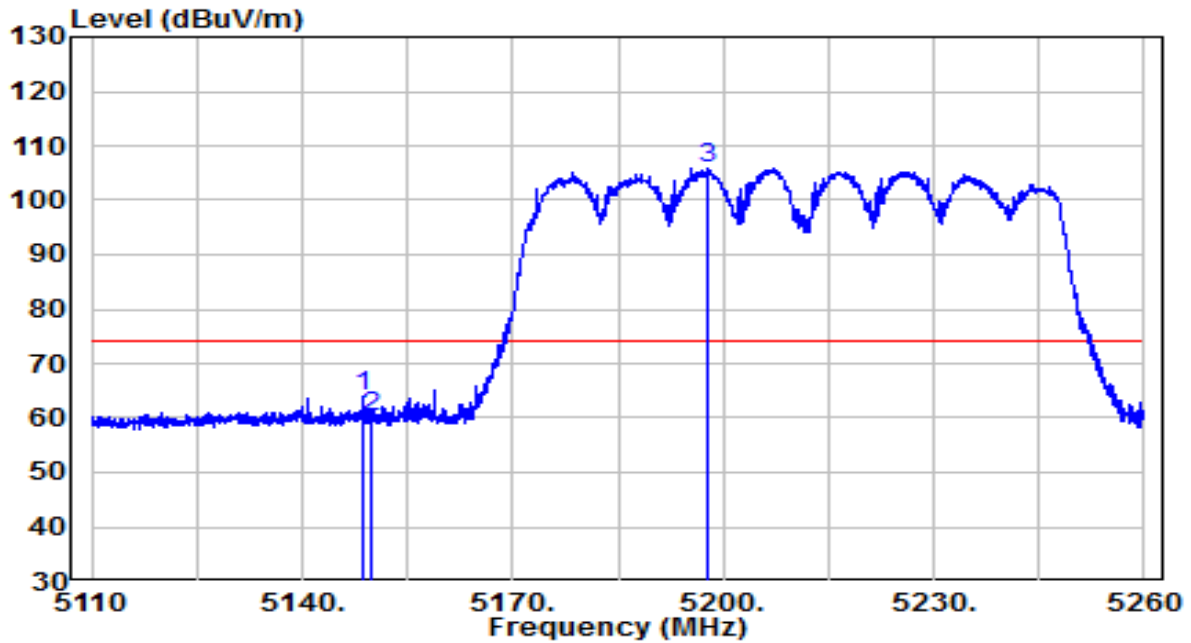


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	5148.775	44.04	19.90	63.94	-10.06	74.00	Peak
2		5150.000	40.30	19.91	60.21	-13.79	74.00	Peak
3		5197.825	85.89	19.96	105.84	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	120V/60Hz

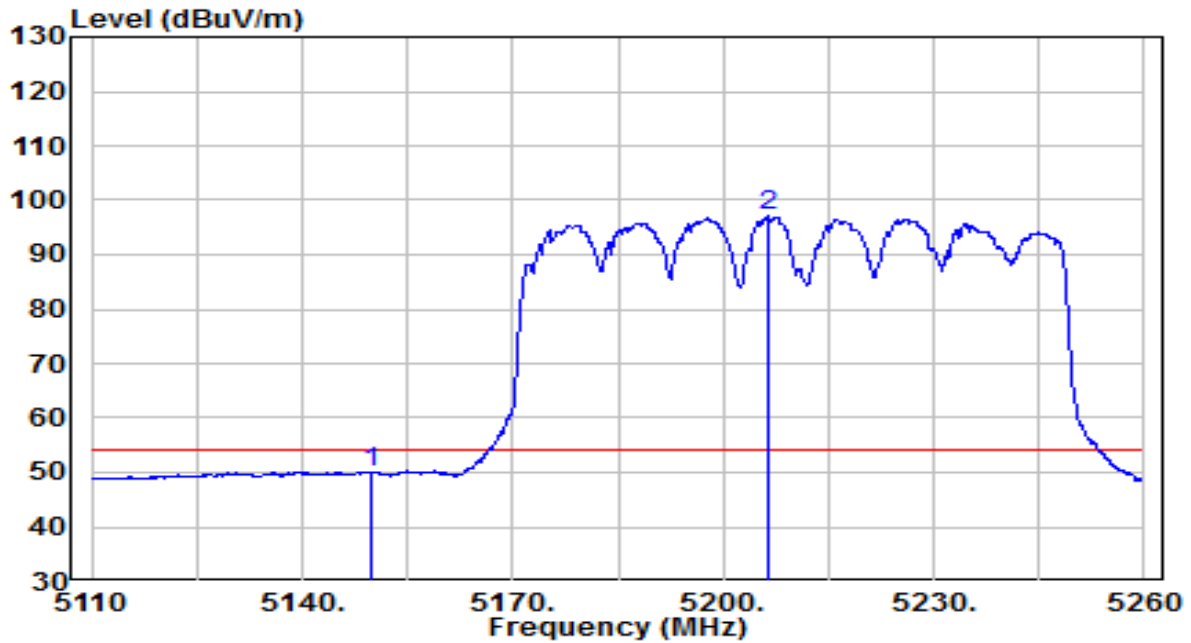


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5150.000	29.98	19.91	49.89	-4.11	54.00	Average
2	5206.450	77.19	19.96	97.16	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	120V/60Hz

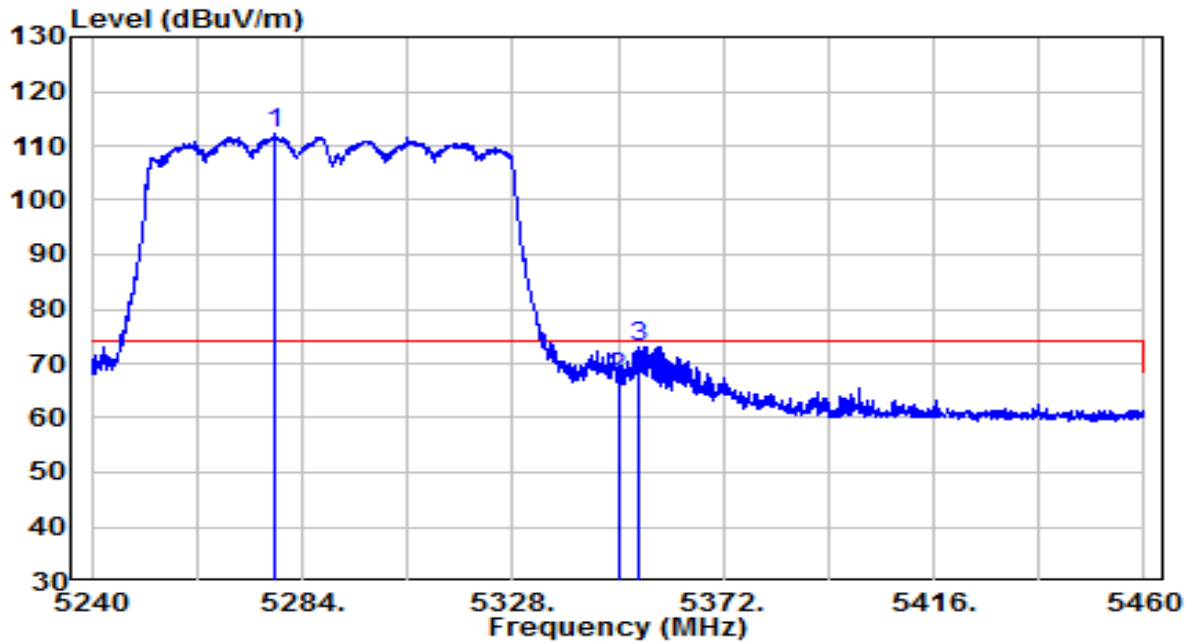


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5278.390	92.13	20.04	112.17	N/A	N/A	Peak
2	5350.000	47.32	20.11	67.43	-6.57	74.00	Peak
3	* 5354.070	53.02	20.12	73.14	-0.86	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	120V/60Hz

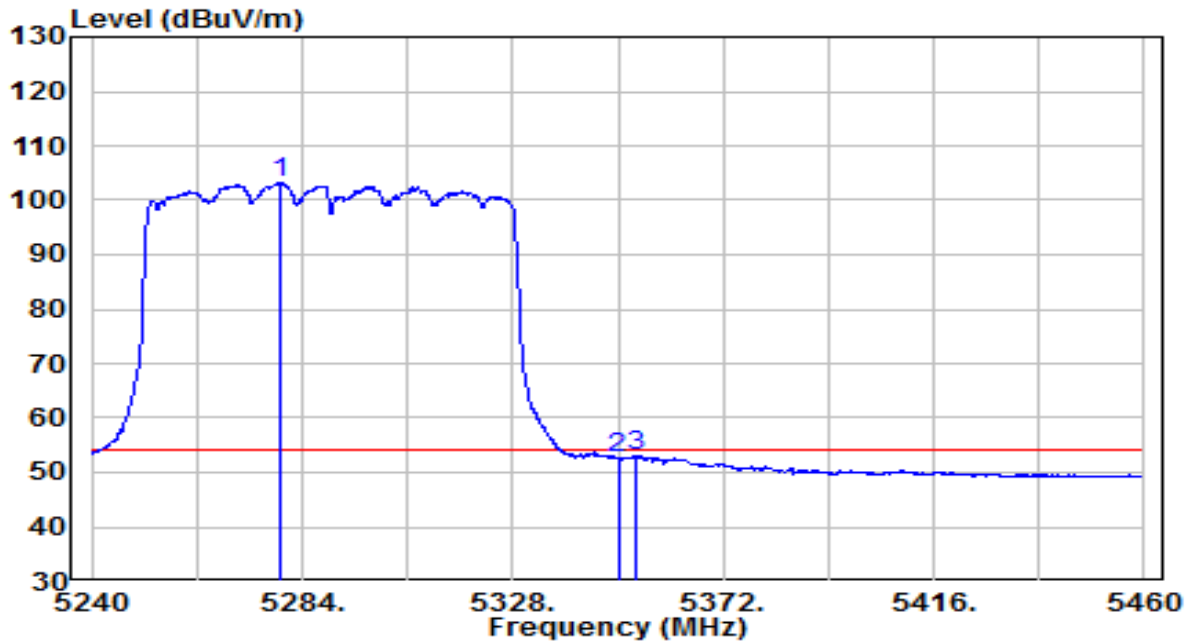


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5279.380	83.19	20.04	103.23	N/A	N/A	Average
2	5350.000	32.53	20.11	52.64	-1.36	54.00	Average
3	* 5353.740	32.97	20.12	53.08	-0.92	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	120V/60Hz

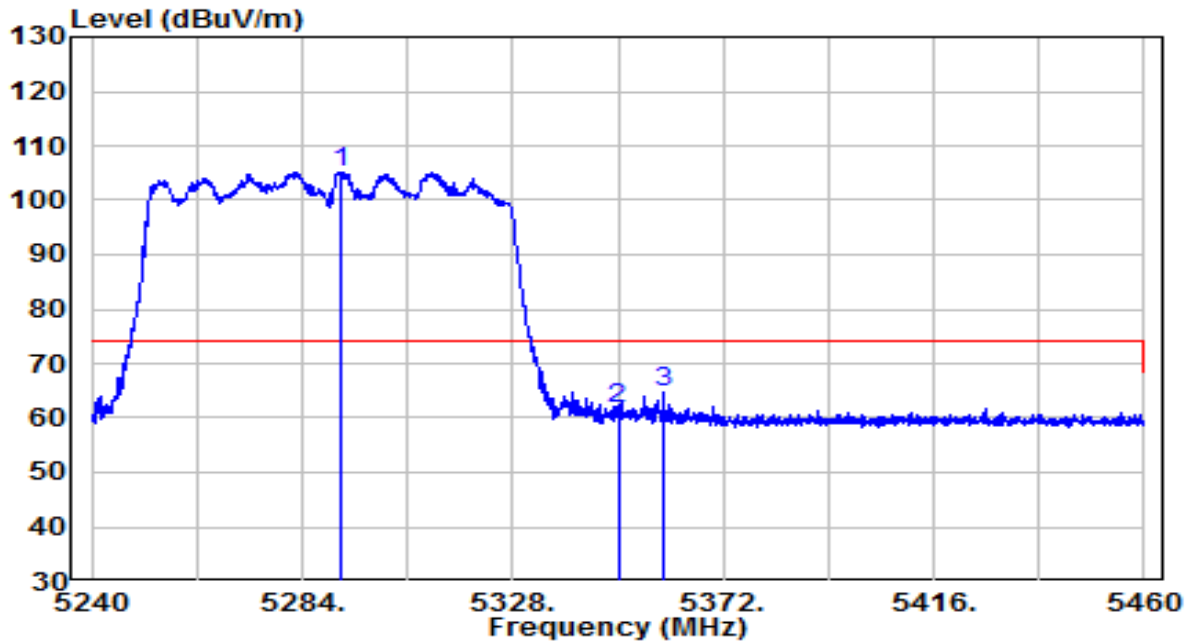


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5292.030	85.16	20.05	105.22	N/A	N/A	Peak
2	5350.000	41.76	20.11	61.88	-12.12	74.00	Peak
3	* 5359.570	44.57	20.12	64.70	-9.30	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	120V/60Hz

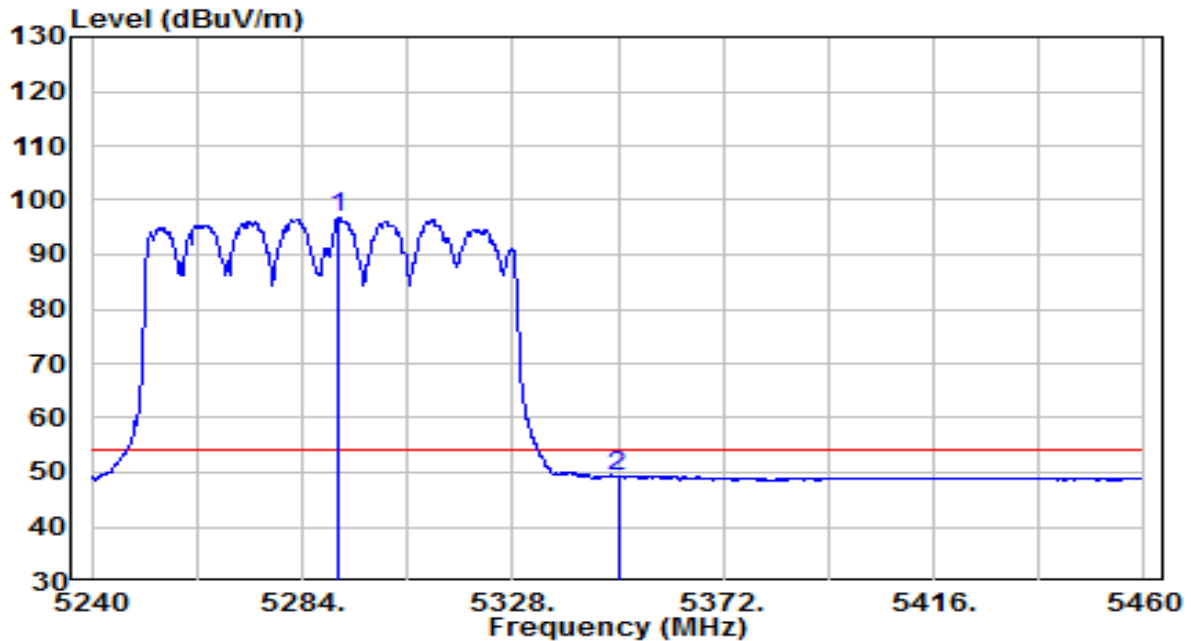


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5291.700	76.68	20.05	96.74	N/A	N/A	Average
2	* 5350.000	29.09	20.11	49.20	-4.80	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	120V/60Hz

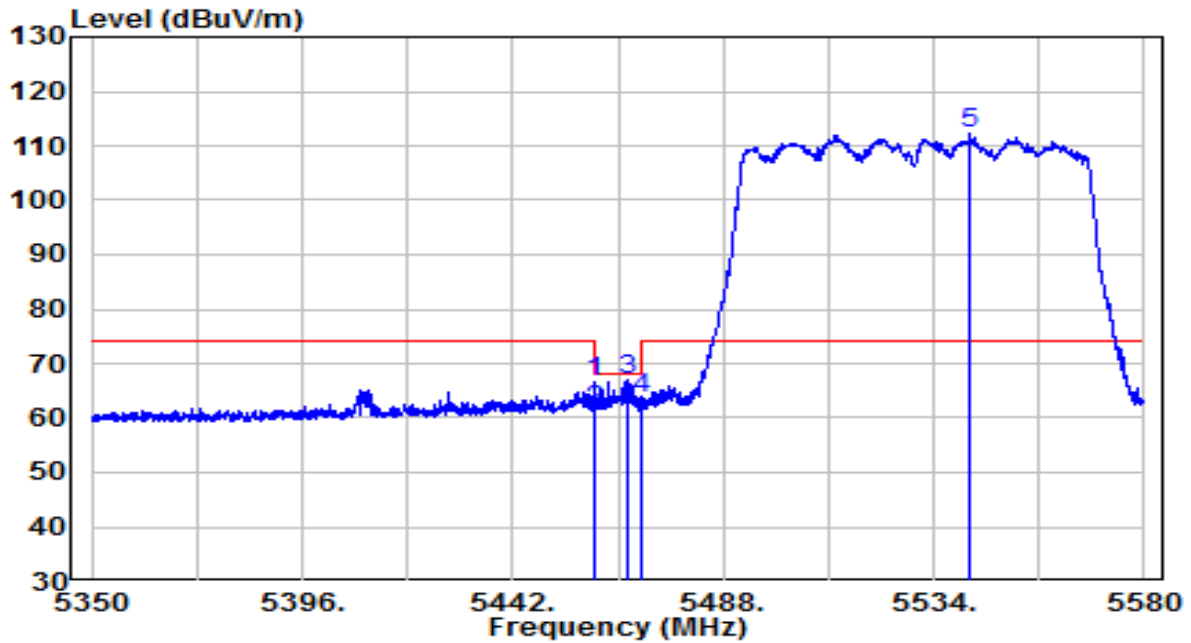


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5459.710	46.41	20.23	66.64	-7.36	74.00	Peak
2	5460.000	41.13	20.23	61.35	-6.85	68.20	Peak
3	* 5467.300	46.69	20.24	66.93	-1.27	68.20	Peak
4	5470.000	43.19	20.24	63.43	-4.77	68.20	Peak
5	5541.820	91.91	20.41	112.31	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	120V/60Hz

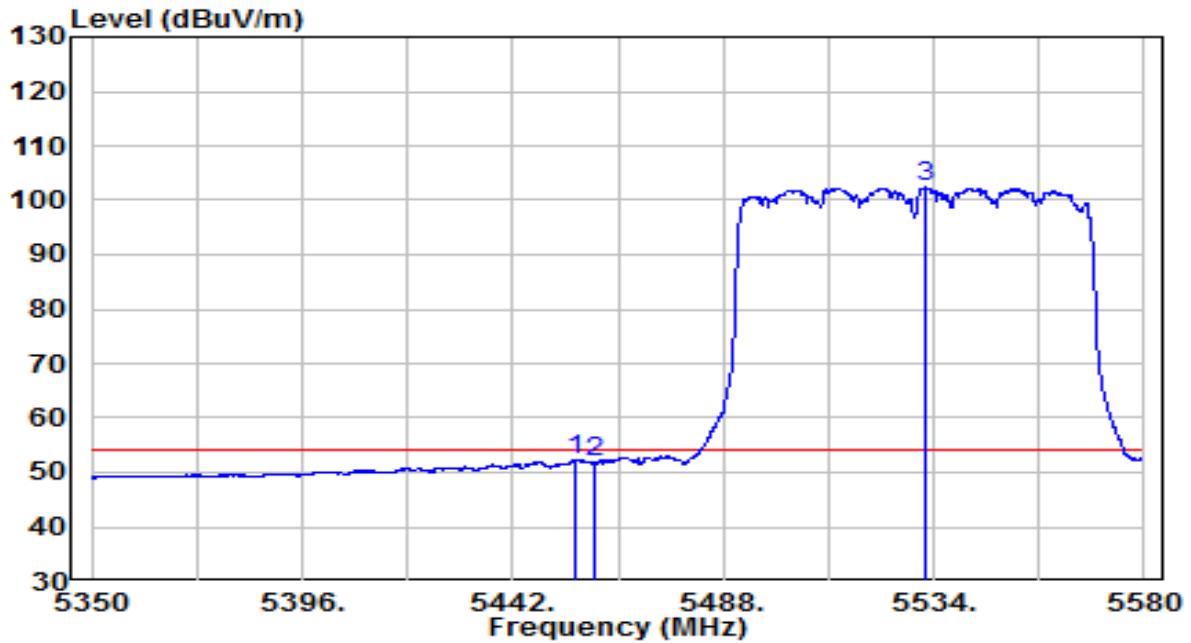


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5455.800	32.11	20.22	52.33	-1.67	54.00	Average
2	5460.000	31.62	20.23	51.85	-2.15	54.00	Average
3	5532.160	81.95	20.37	102.32	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	120V/60Hz

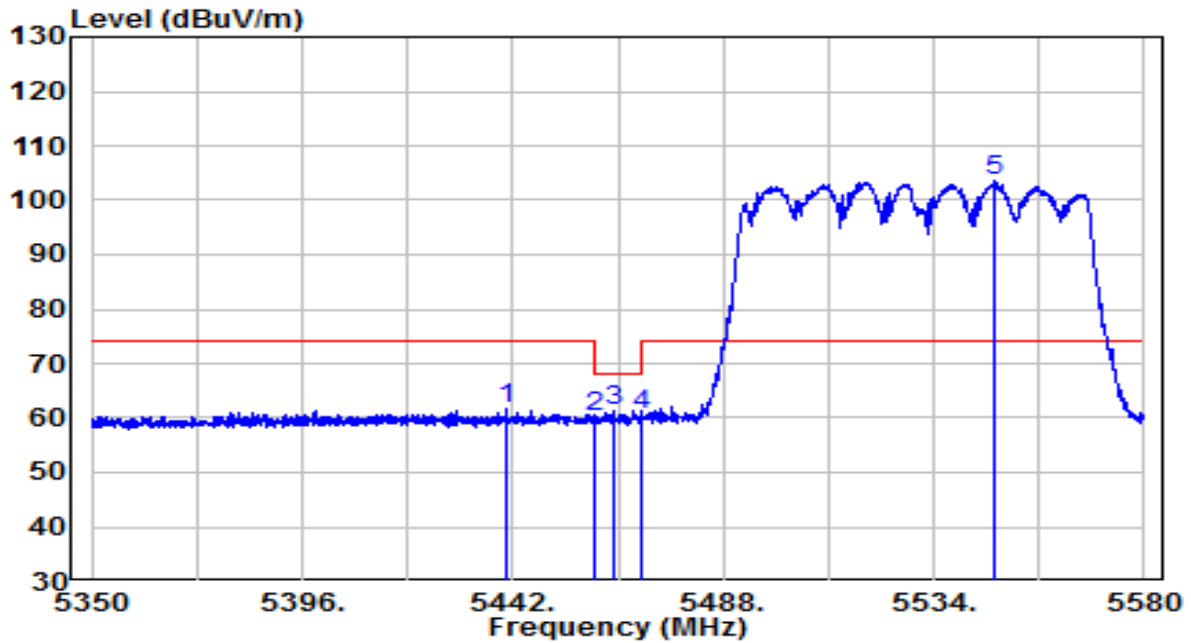


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5440.620	41.45	20.21	61.66	-12.34	74.00	Peak
2	5460.000	39.79	20.23	60.02	-8.18	68.20	Peak
3	* 5464.195	41.14	20.23	61.37	-6.83	68.20	Peak
4	5470.000	40.32	20.24	60.56	-7.64	68.20	Peak
5	5546.995	83.22	20.42	103.65	N/A	N/A	Peak

Note:

- "*" , means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	120V/60Hz

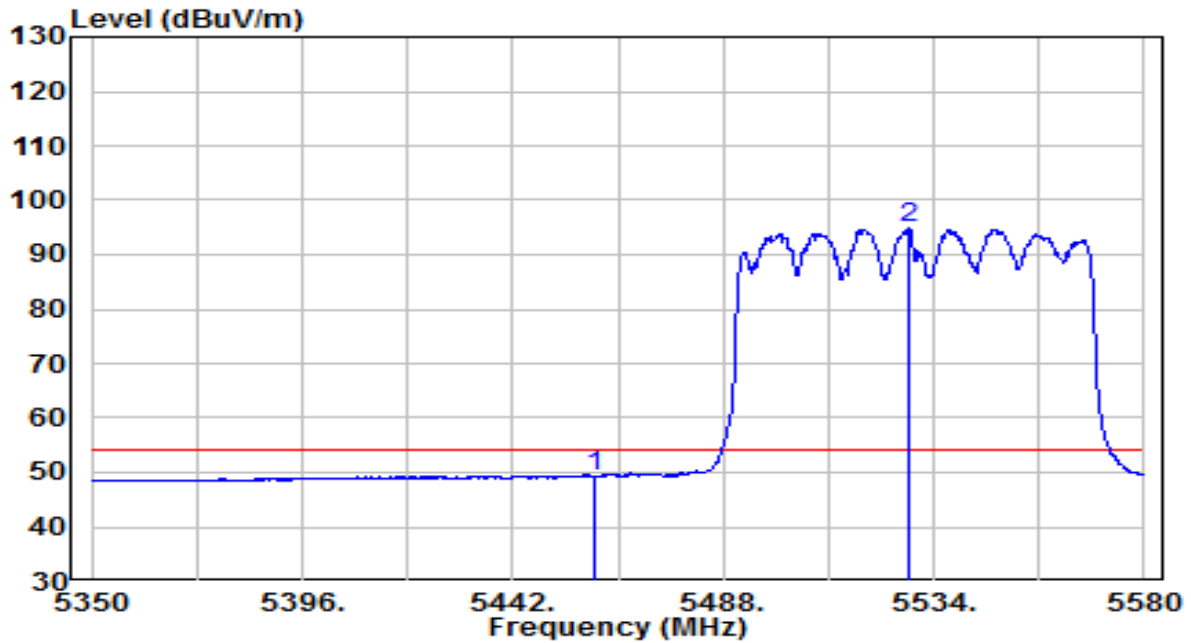


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5460.000	28.99	20.23	49.22	-4.78	54.00	Average
2	5528.710	74.44	20.36	94.80	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	120V/60Hz

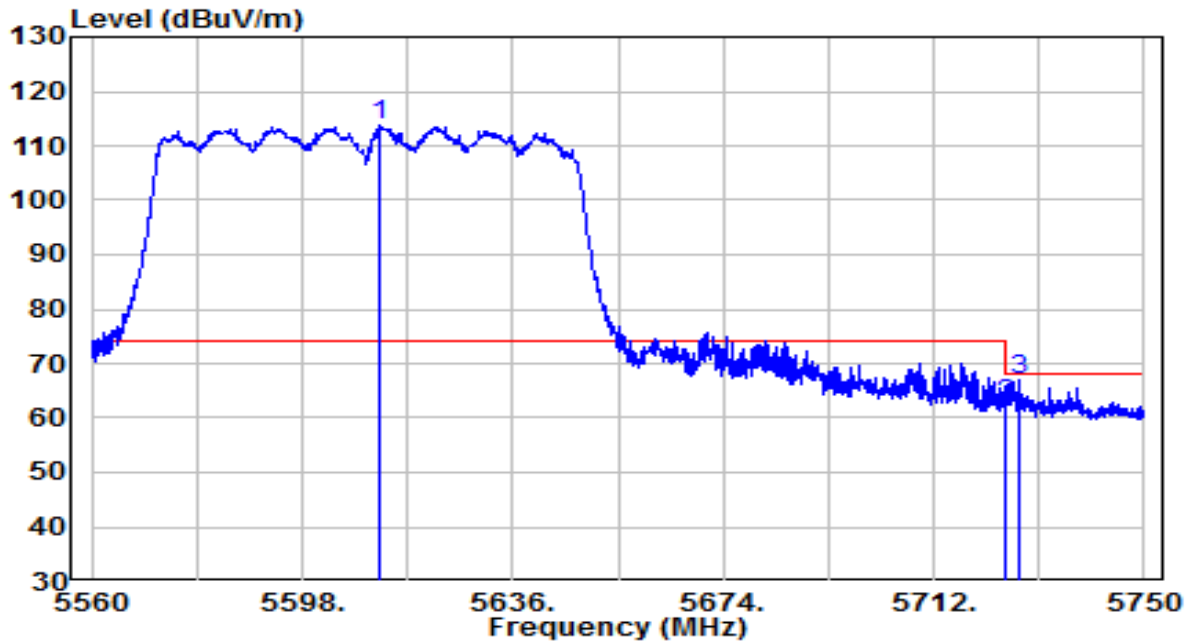


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5611.775	92.97	20.63	113.60	N/A	N/A	Peak
2	5725.000	41.58	21.00	62.58	-5.62	68.20	Peak
3	* 5727.295	46.08	21.01	67.08	-1.12	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	120V/60Hz

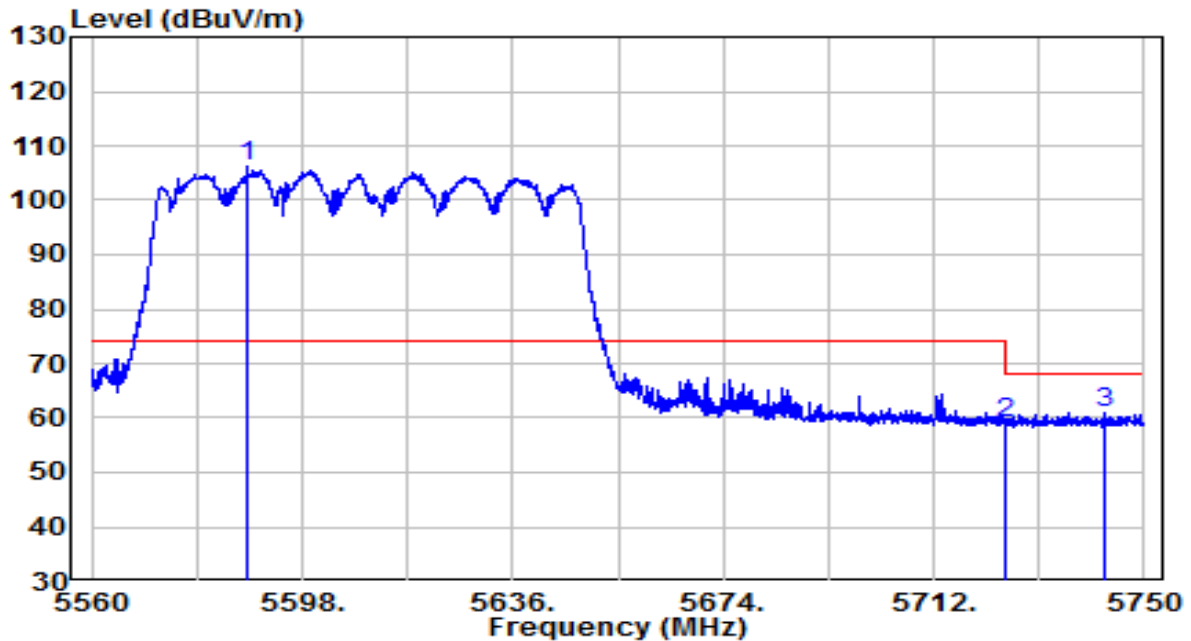


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5587.930	85.56	20.55	106.11	N/A	N/A	Peak
2	5725.000	38.02	21.00	59.02	-9.18	68.20	Peak
3	* 5743.065	40.04	21.06	61.09	-7.11	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	120V/60Hz

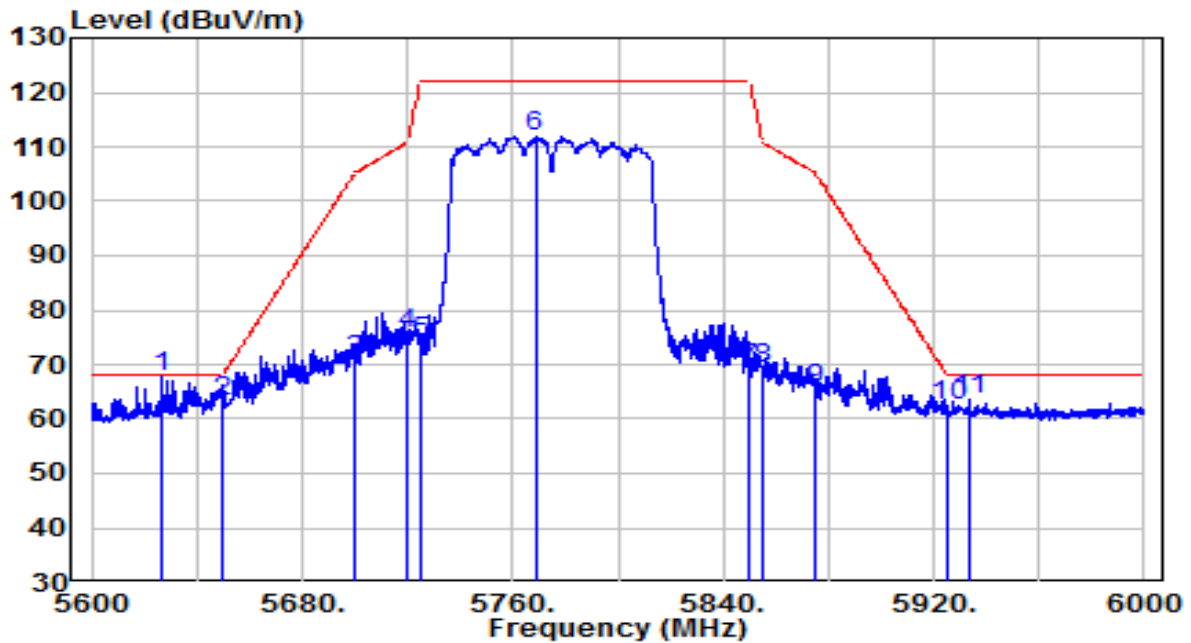


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	* 5626.800	47.01	20.68	67.69	-0.51	68.20	Peak
2	5650.000	42.28	20.76	63.03	-5.17	68.20	Peak
3	5700.000	49.65	20.92	70.57	-34.63	105.20	Peak
4	5720.000	54.68	20.98	75.66	-35.14	110.80	Peak
5	5725.000	53.14	21.00	74.13	-48.07	122.20	Peak
6	5768.600	90.70	21.14	111.85	N/A	N/A	Peak
7	5850.000	47.92	21.40	69.32	-52.88	122.20	Peak
8	5855.000	47.70	21.42	69.12	-41.68	110.80	Peak
9	5875.000	43.92	21.49	65.40	-39.80	105.20	Peak
10	5925.000	40.83	21.65	62.48	-5.72	68.20	Peak
11	5933.200	41.86	21.67	63.53	-4.67	68.20	Peak

Note:

1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	120V/60Hz

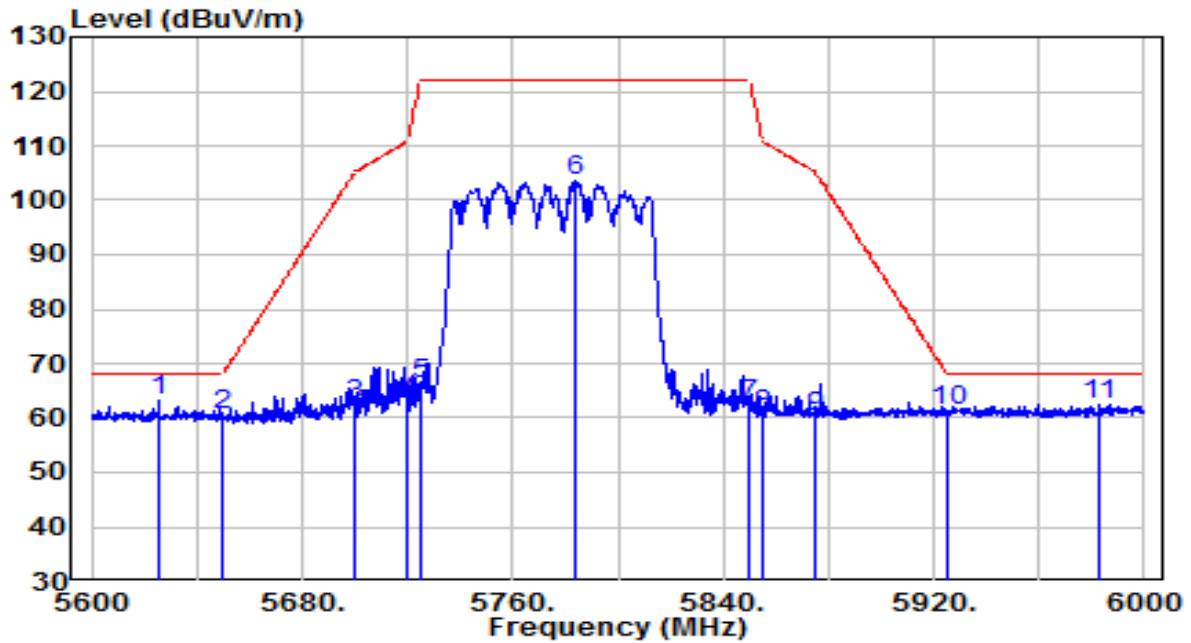

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5625.400	42.56	20.68	63.24	-4.96	68.20	Peak
2	5650.000	39.90	20.76	60.66	-7.54	68.20	Peak
3	5700.000	41.71	20.92	62.63	-42.57	105.20	Peak
4	5720.000	41.84	20.98	62.83	-47.97	110.80	Peak
5	5725.000	45.39	21.00	66.39	-55.81	122.20	Peak
6	5784.200	82.22	21.19	103.41	N/A	N/A	Peak
7	5850.000	41.07	21.40	62.48	-59.72	122.20	Peak
8	5855.000	39.30	21.42	60.72	-50.08	110.80	Peak
9	5875.000	38.79	21.49	60.28	-44.92	105.20	Peak
10	5925.000	39.65	21.65	61.30	-6.90	68.20	Peak
11	5983.000	40.75	21.83	62.59	-5.61	68.20	Peak

Note:


1. " *", means this data is the worst emission level.

2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)- Preamplifier(dB)+ 16dB Attenuation.

3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5180MHz	Test Voltage	120V/60Hz

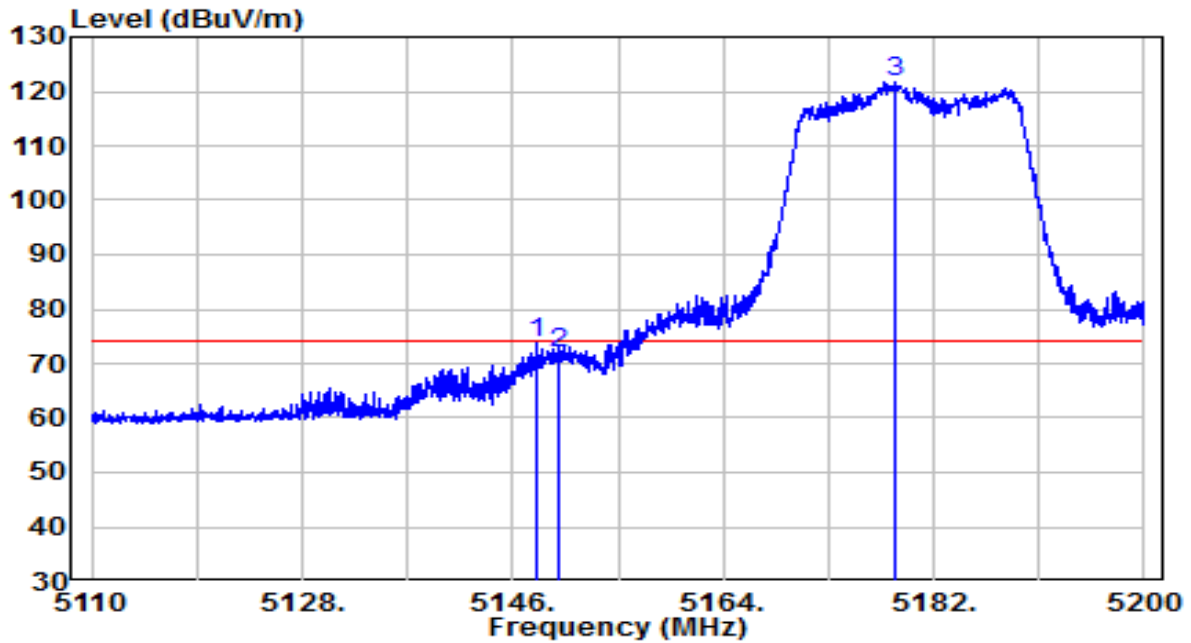


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	5148.070	53.80	19.90	73.70	-0.30	74.00	Peak
2		5150.000	51.92	19.91	71.83	-2.17	74.00	Peak
3		5178.715	101.86	19.94	121.79	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)- Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5180MHz	Test Voltage	120V/60Hz

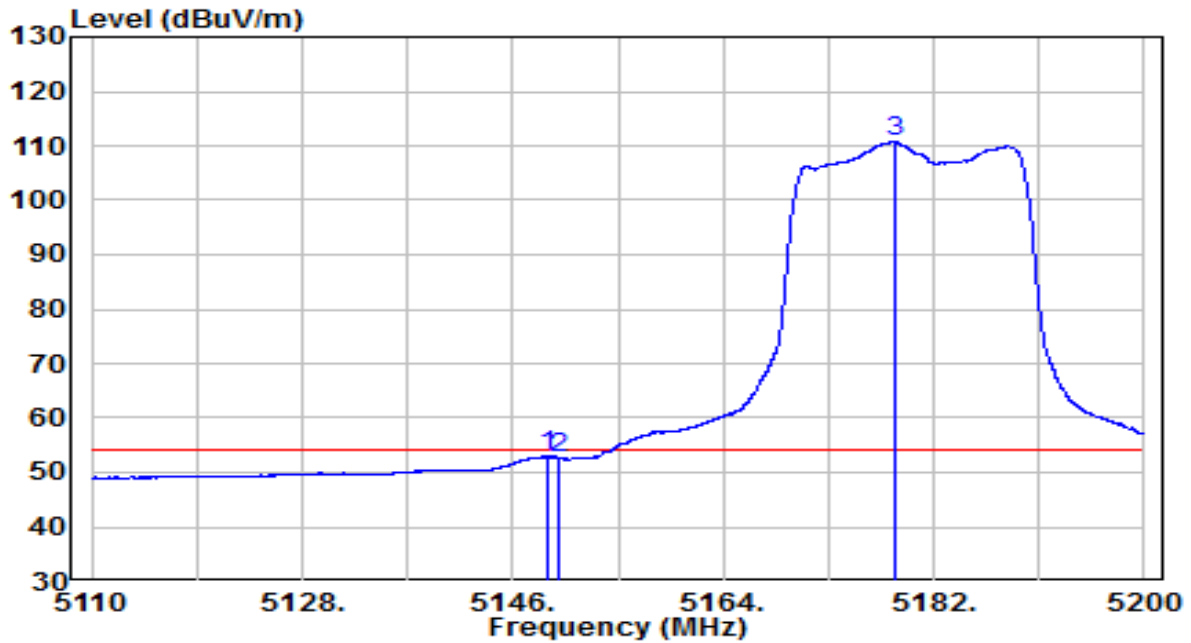


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	5148.925	33.27	19.90	53.17	-0.83	54.00	Average
2		5150.000	32.71	19.91	52.62	-1.38	54.00	Average
3		5178.715	90.91	19.94	110.85	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5180MHz	Test Voltage	120V/60Hz

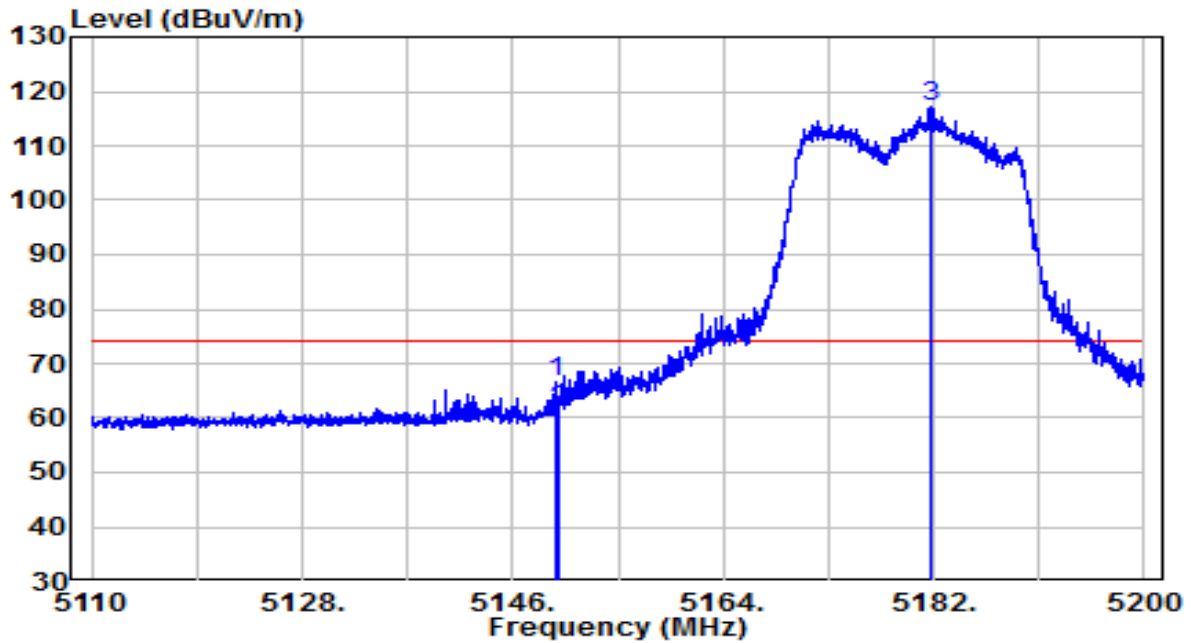


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	5149.600	46.57	19.91	66.48	-7.52	74.00	Peak
2		5150.000	41.57	19.91	61.48	-12.52	74.00	Peak
3		5181.820	97.11	19.94	117.05	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5180MHz	Test Voltage	120V/60Hz

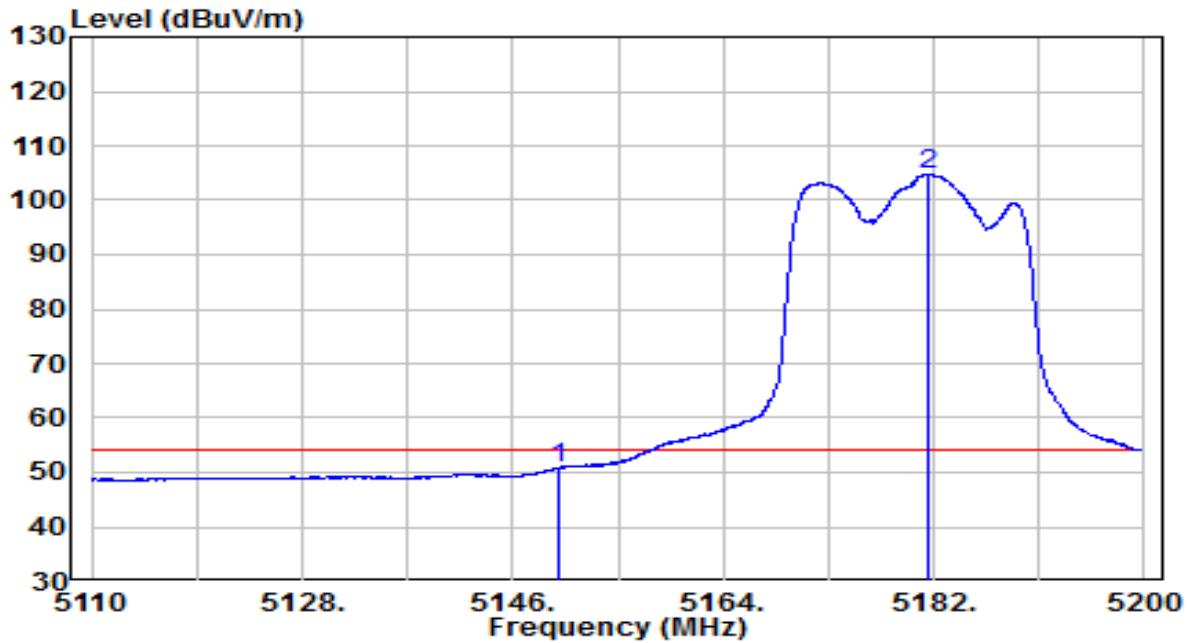


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	30.89	19.91	50.79	-3.21	54.00	Average
2		84.71	19.94	104.64	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5240MHz	Test Voltage	120V/60Hz

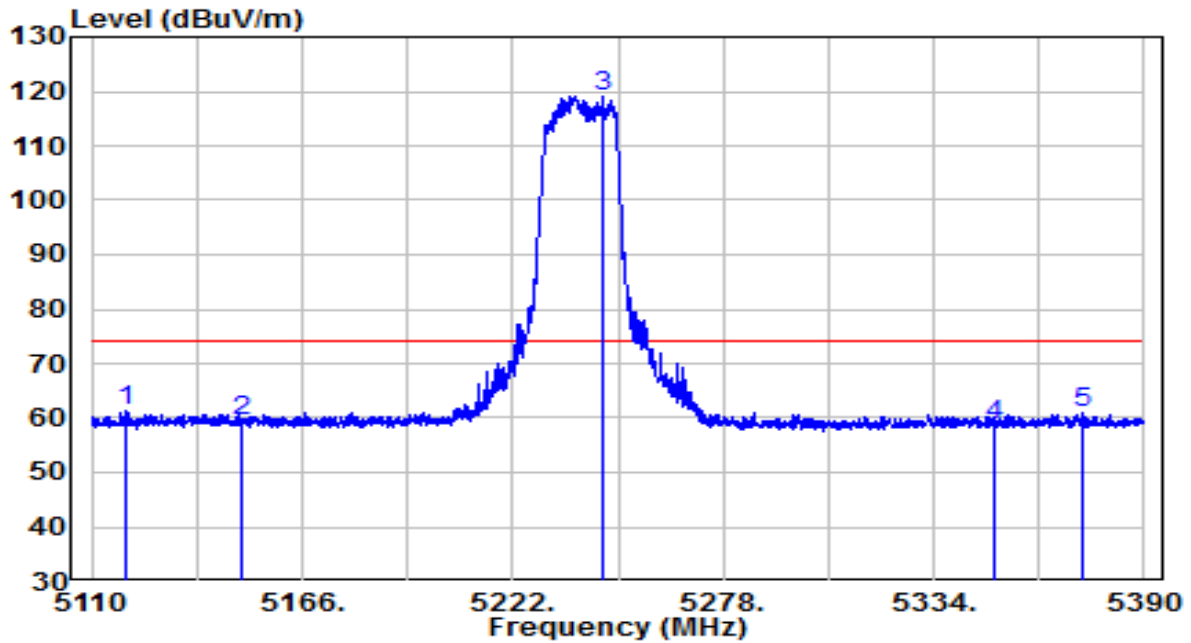


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	41.52	19.87	61.39	-12.61	74.00	Peak
2		39.54	19.91	59.45	-14.55	74.00	Peak
3		99.21	20.01	119.22	N/A	N/A	Peak
4		38.73	20.11	58.85	-15.15	74.00	Peak
5		40.62	20.14	60.76	-13.24	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5240MHz	Test Voltage	120V/60Hz

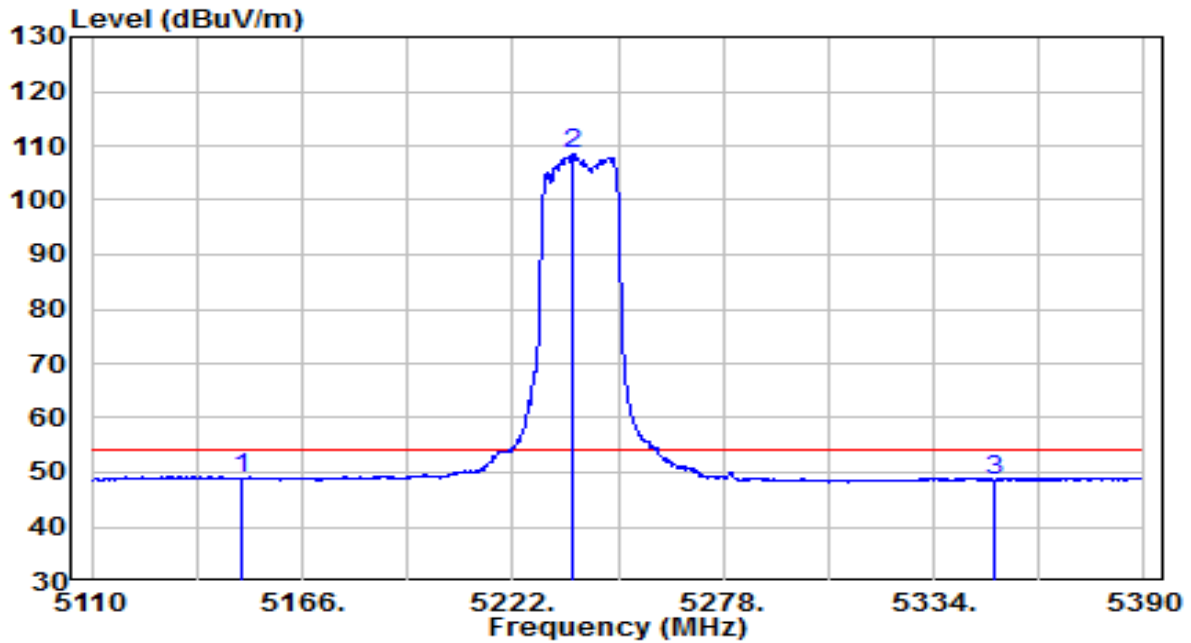


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5150.000	29.08	19.91	48.99	-5.01	54.00	Average
2	5238.240	88.50	20.00	108.50	N/A	N/A	Average
3	5350.000	28.53	20.11	48.64	-5.36	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5240MHz	Test Voltage	120V/60Hz

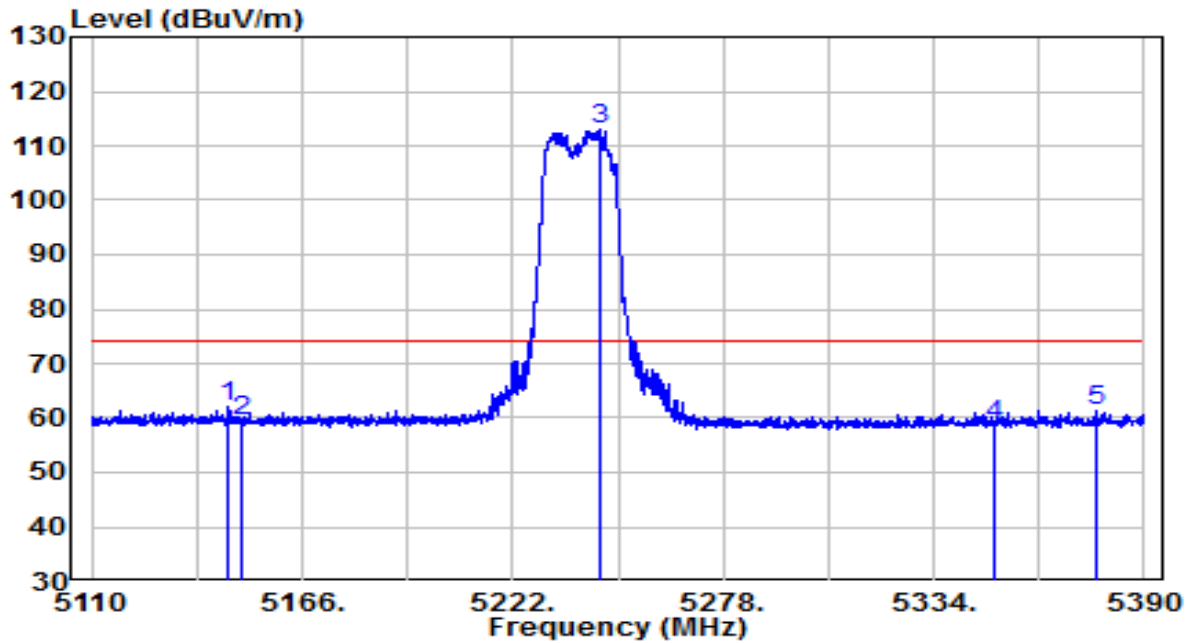


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5146.120	42.22	19.90	62.12	-11.88	74.00	Peak
2	5150.000	39.46	19.91	59.37	-14.63	74.00	Peak
3	5244.960	93.05	20.00	113.05	N/A	N/A	Peak
4	5350.000	38.40	20.11	58.51	-15.49	74.00	Peak
5	5376.980	41.35	20.14	61.49	-12.51	74.00	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5240MHz	Test Voltage	120V/60Hz

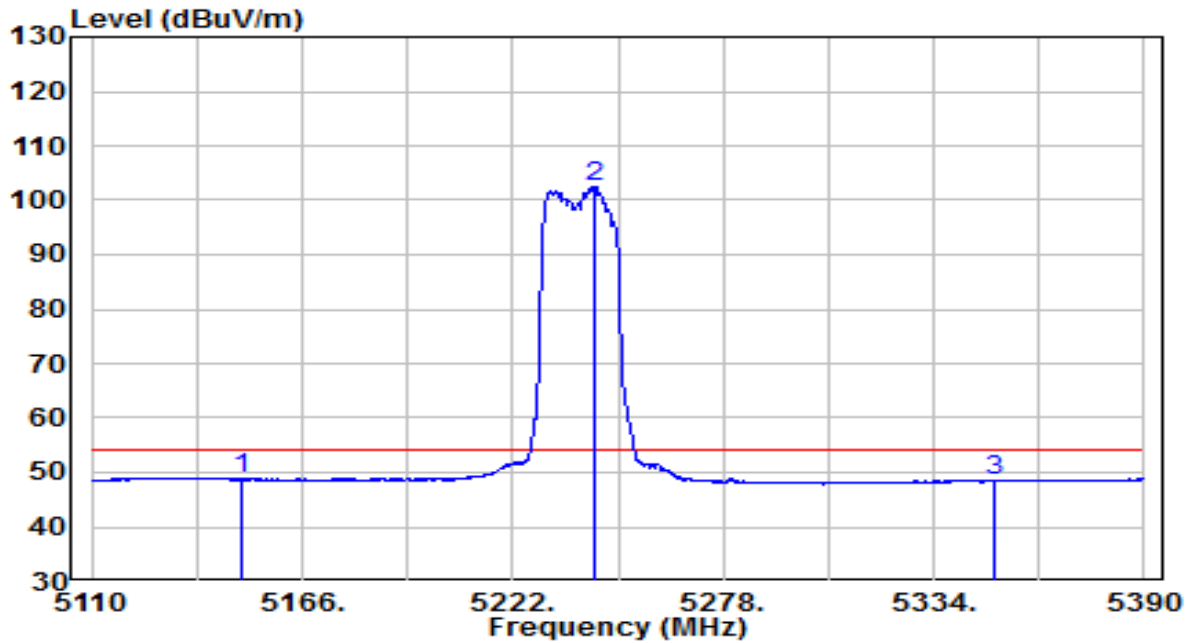


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5150.000	28.84	19.91	48.74	-5.26	54.00	Average
2	5243.980	82.43	20.00	102.43	N/A	N/A	Average
3	5350.000	28.21	20.11	48.33	-5.67	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5320MHz	Test Voltage	120V/60Hz

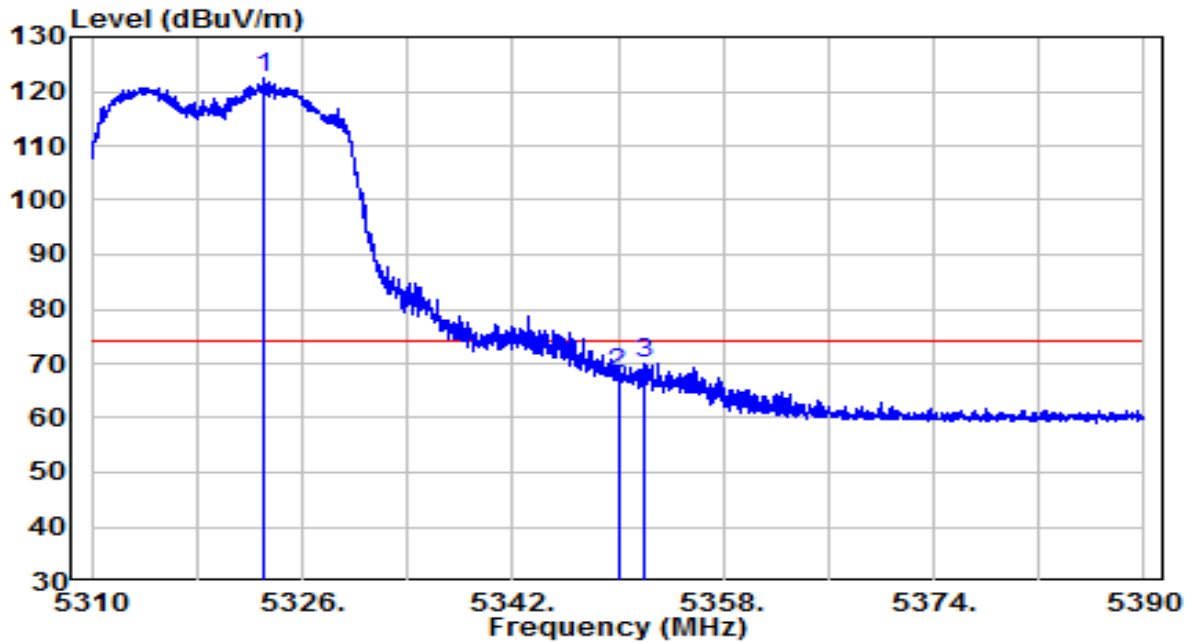


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5323.160	102.39	20.09	122.47	N/A	N/A	Peak
2	5350.000	48.18	20.11	68.29	-5.71	74.00	Peak
3	* 5351.960	49.83	20.12	69.94	-4.06	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5320MHz	Test Voltage	120V/60Hz

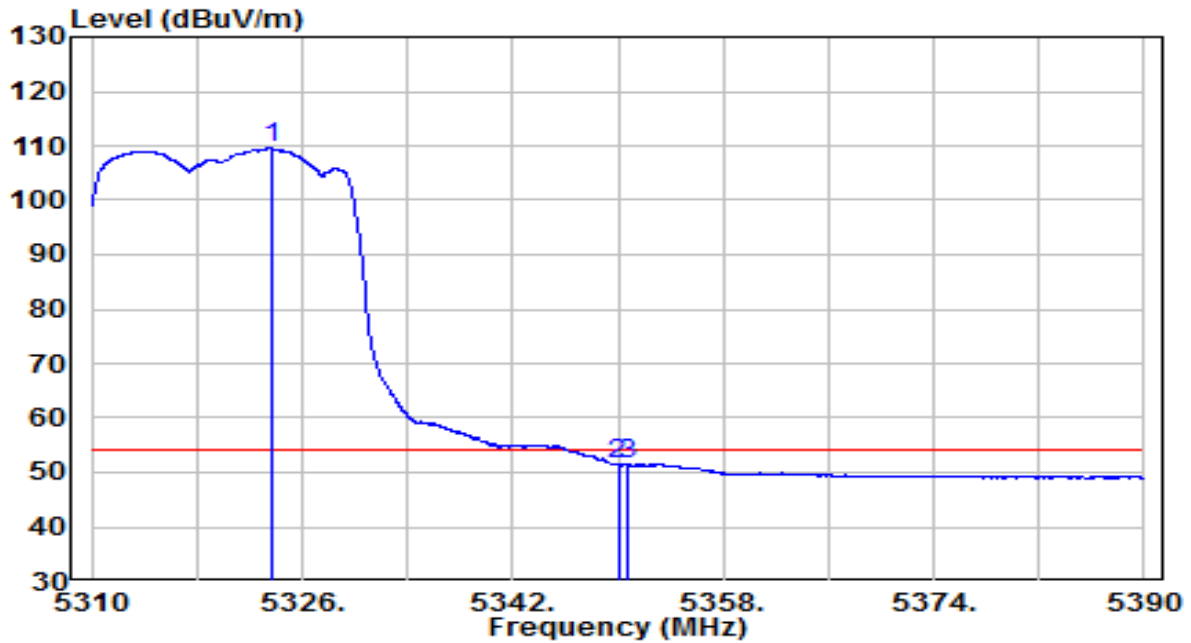


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5323.680	89.47	20.09	109.55	N/A	N/A	Average
2	5350.000	31.24	20.11	51.35	-2.65	54.00	Average
3	* 5350.680	31.51	20.11	51.62	-2.38	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5320MHz	Test Voltage	120V/60Hz

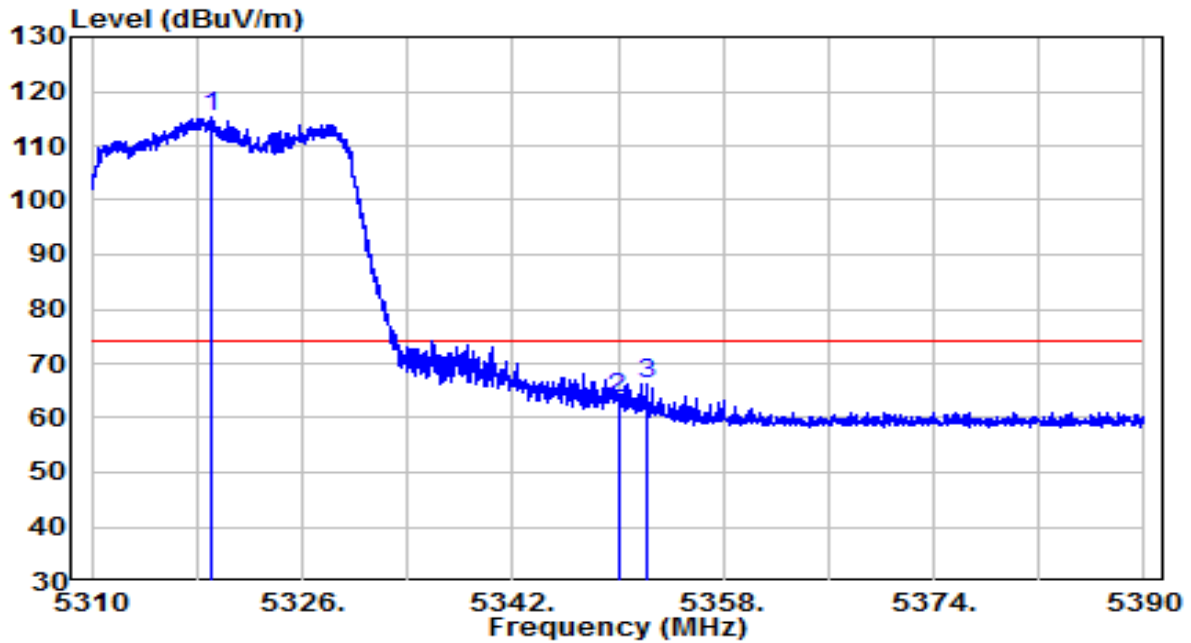


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5319.000	95.07	20.08	115.15	N/A	N/A	Peak
2	5350.000	43.46	20.11	63.57	-10.43	74.00	Peak
3	* 5352.120	46.30	20.12	66.41	-7.59	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5320MHz	Test Voltage	120V/60Hz

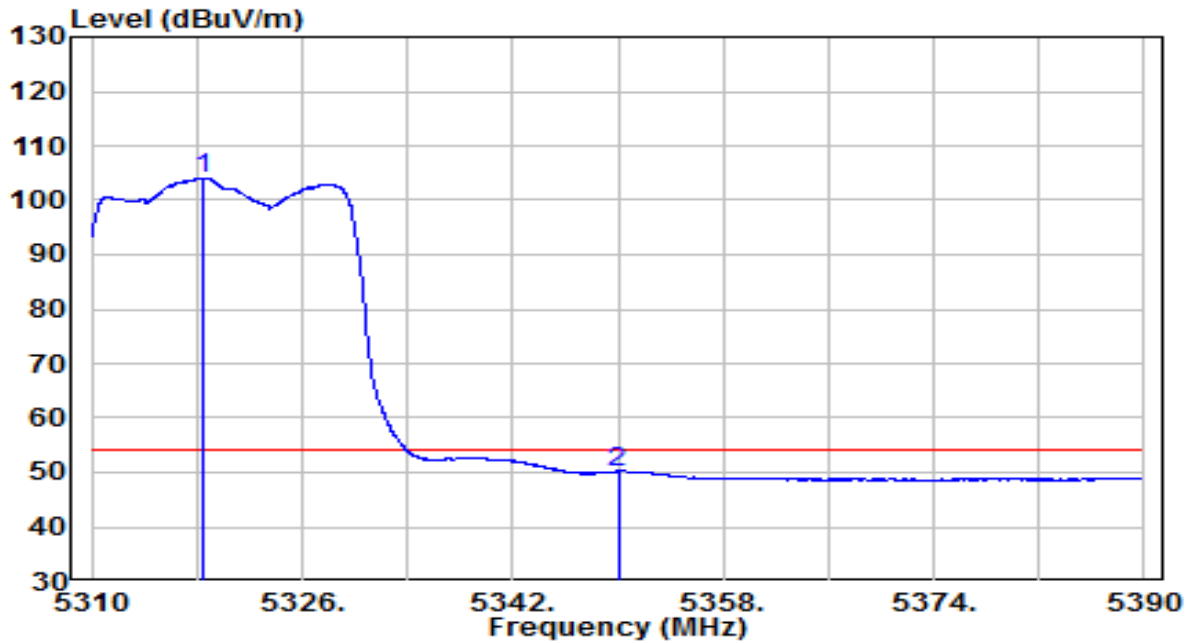


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5318.560	83.99	20.08	104.07	N/A	N/A	Average
2	* 5350.000	29.95	20.11	50.07	-3.93	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5500MHz	Test Voltage	120V/60Hz

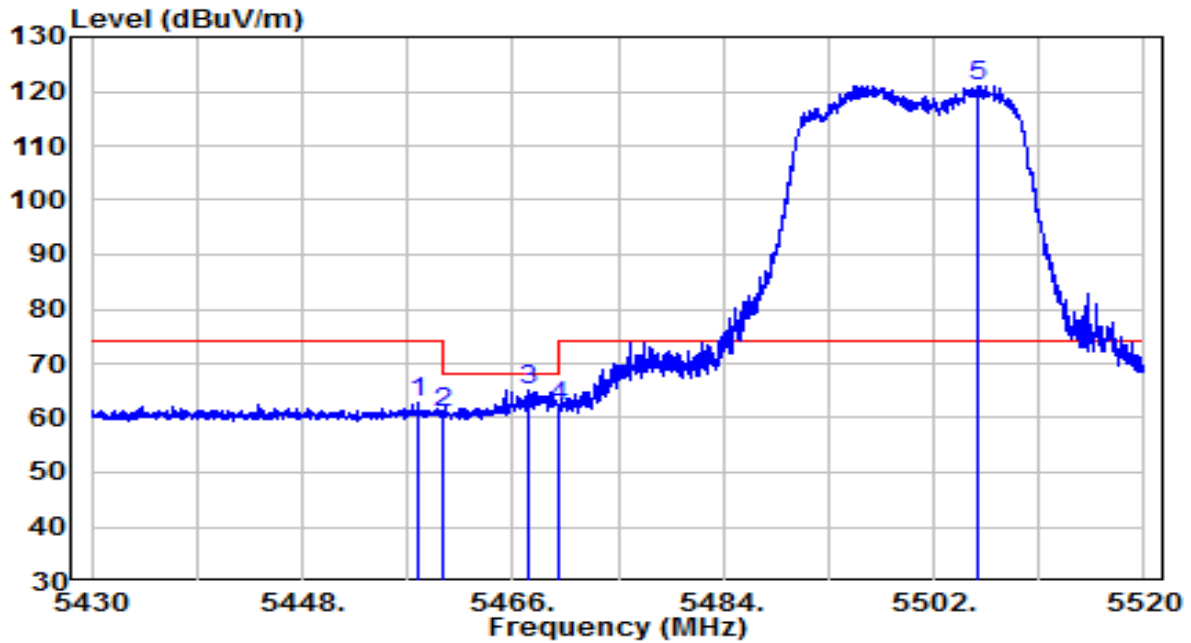


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5457.900	42.59	20.23	62.81	-11.19	74.00	Peak
2	5460.000	40.57	20.23	60.80	-7.40	68.20	Peak
3	* 5467.395	44.96	20.24	65.20	-3.00	68.20	Peak
4	5470.000	41.76	20.24	62.00	-6.20	68.20	Peak
5	5505.825	100.75	20.29	121.04	N/A	N/A	Peak

Note:

- "*" , means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5500MHz	Test Voltage	120V/60Hz

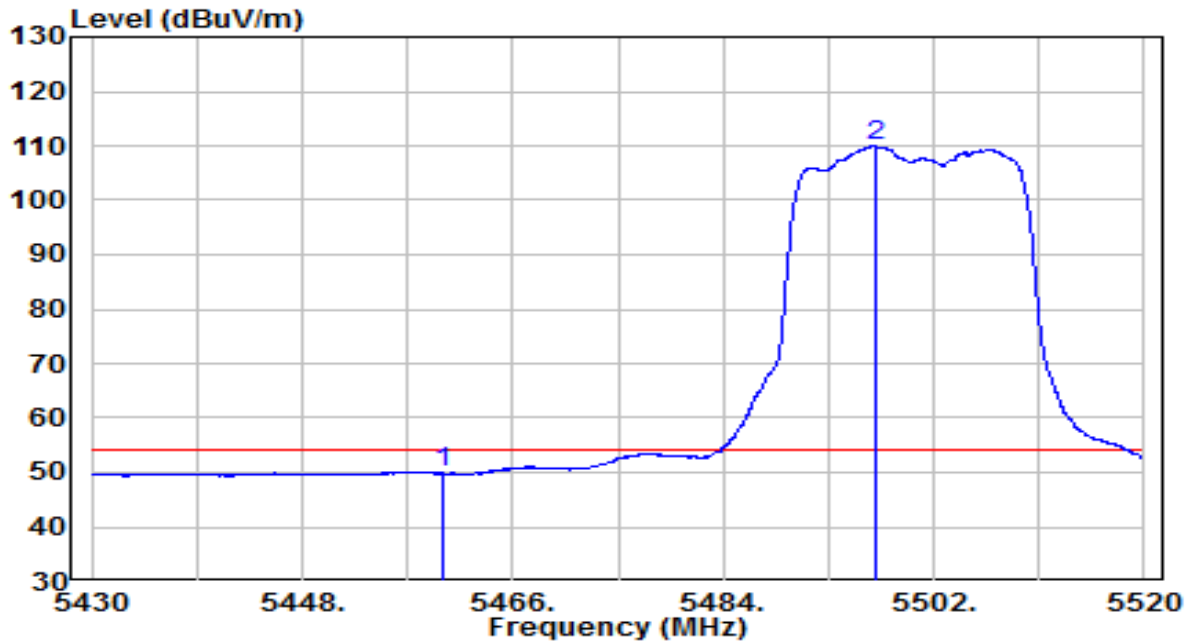


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5460.000	29.64	20.23	49.87	-4.13	54.00	Average
2	5497.050	89.66	20.27	109.93	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5500MHz	Test Voltage	120V/60Hz

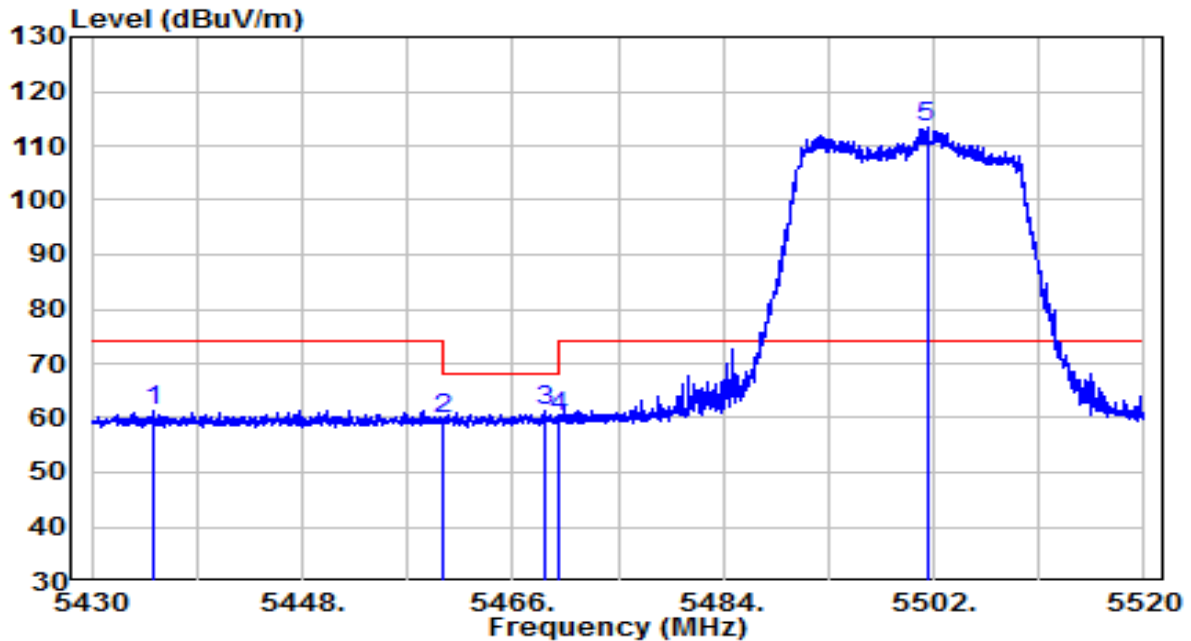


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5435.220	41.17	20.20	61.37	-12.63	74.00	Peak
2	5460.000	39.66	20.23	59.88	-8.32	68.20	Peak
3	* 5468.745	40.96	20.24	61.20	-7.00	68.20	Peak
4	5470.000	40.13	20.24	60.36	-7.84	68.20	Peak
5	5501.415	93.01	20.27	113.28	N/A	N/A	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5500MHz	Test Voltage	120V/60Hz

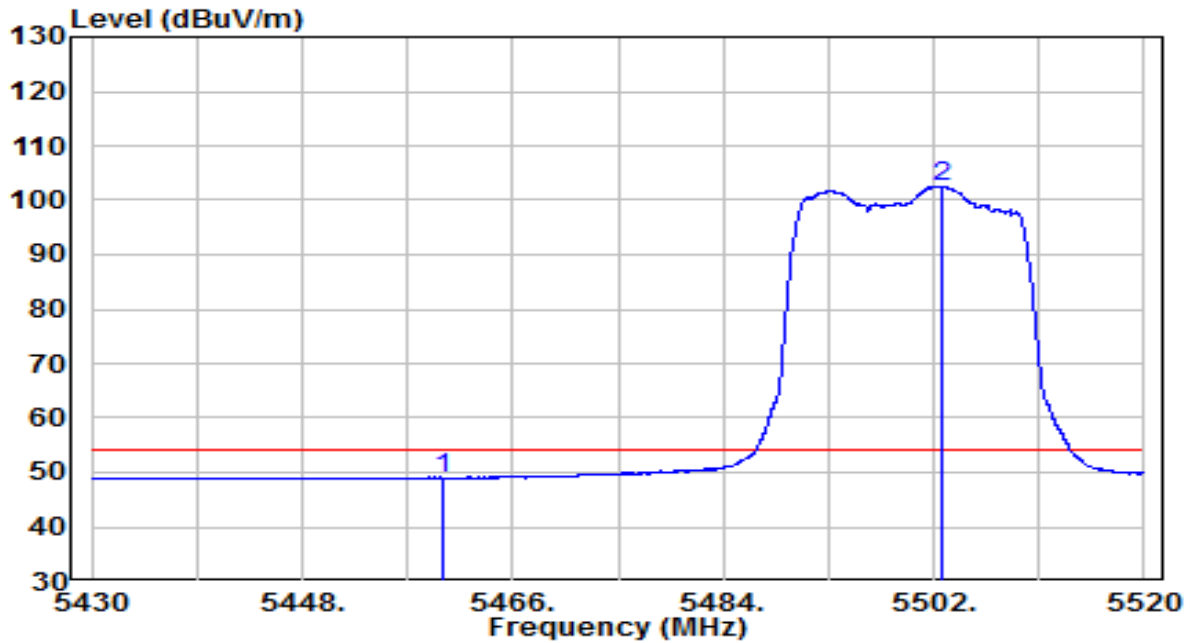


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5460.000	28.75	20.23	48.97	-5.03	54.00	Average
2	5502.630	82.34	20.28	102.62	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5700MHz	Test Voltage	120V/60Hz

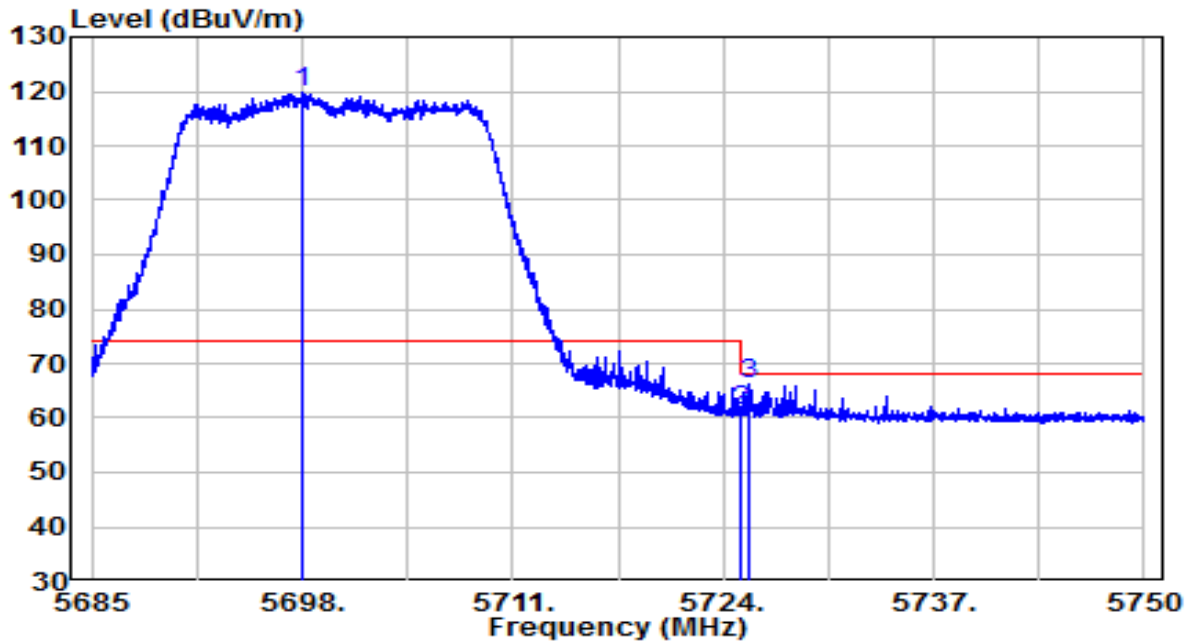


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	5697.967	98.79	20.91	119.70	N/A	N/A	Peak
2	5725.000	40.35	21.00	61.35	-6.85	68.20	Peak
3	* 5725.658	45.12	21.00	66.12	-2.08	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5700MHz	Test Voltage	120V/60Hz

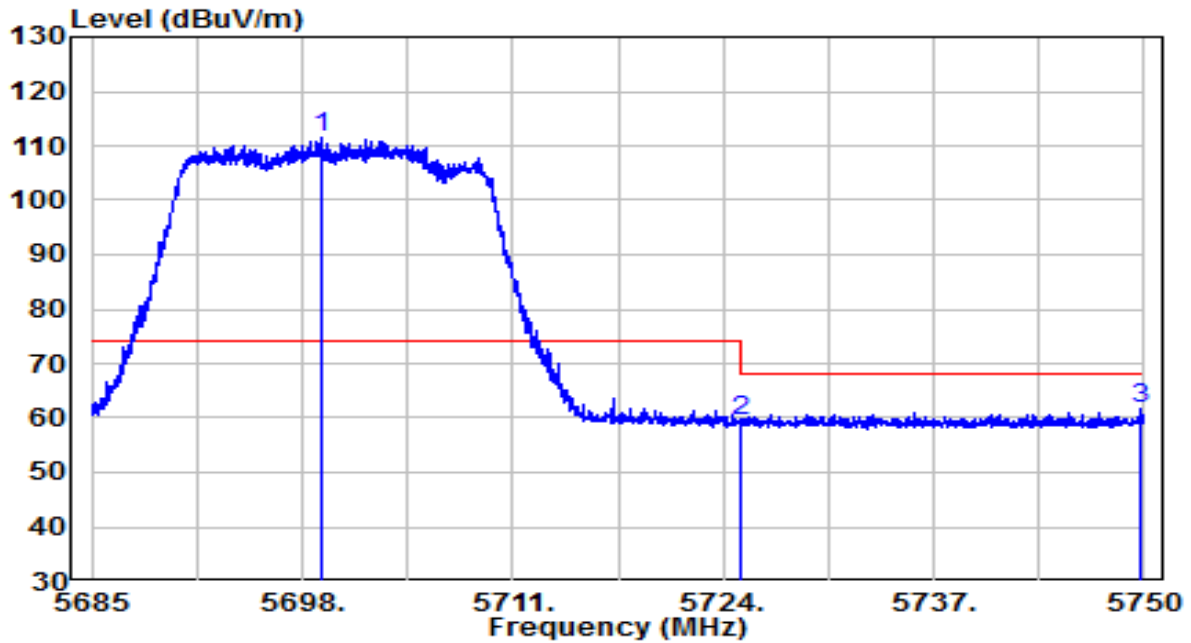


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5699.235	90.56	20.92	111.48	N/A	N/A	Peak
2	5725.000	38.51	21.00	59.51	-8.69	68.20	Peak
3	* 5749.740	40.69	21.08	61.77	-6.43	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5745MHz	Test Voltage	120V/60Hz

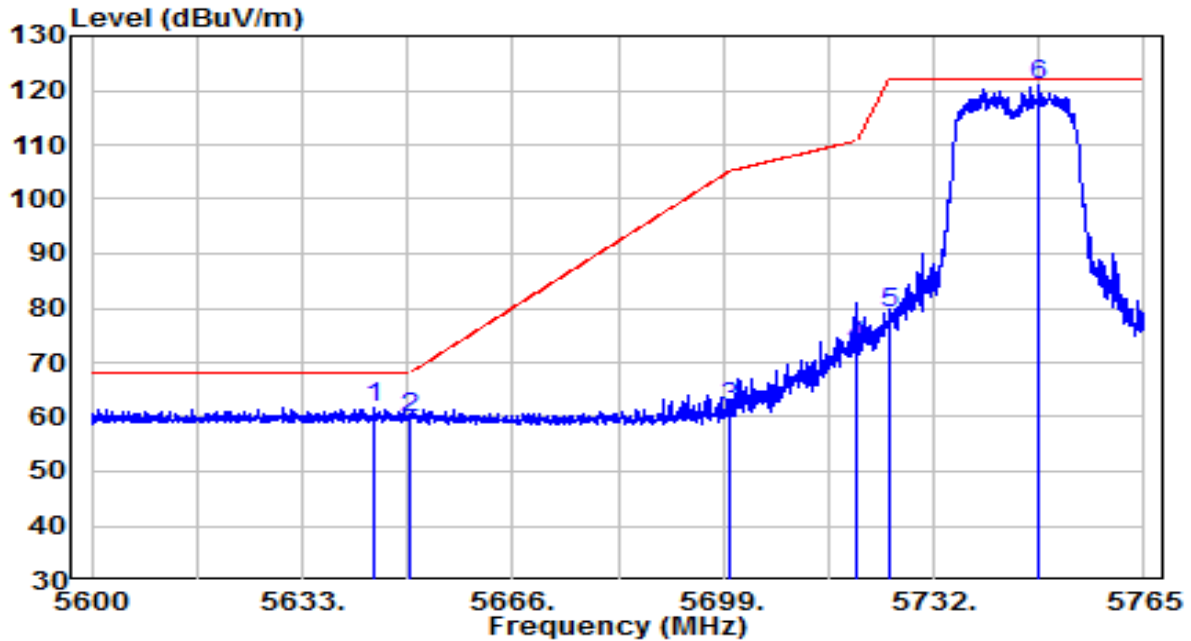


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5644.385	40.86	20.74	61.60	-6.60	68.20	Peak
2	5650.000	39.19	20.76	59.94	-8.26	68.20	Peak
3	5700.000	40.74	20.92	61.66	-43.54	105.20	Peak
4	5720.000	51.98	20.98	72.97	-37.83	110.80	Peak
5	5725.000	57.99	21.00	78.99	-43.21	122.20	Peak
6	5748.335	99.86	21.07	120.93	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5745MHz	Test Voltage	120V/60Hz

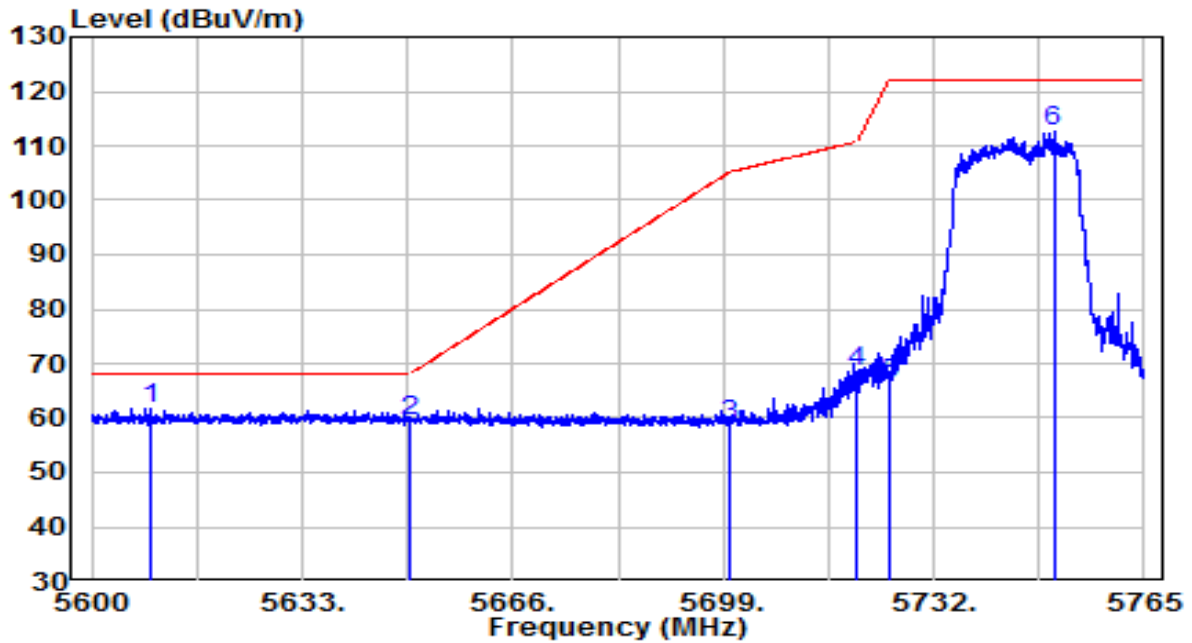


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5609.322	41.18	20.62	61.80	-6.40	68.20	Peak
2	5650.000	38.61	20.76	59.37	-8.83	68.20	Peak
3	5700.000	37.83	20.92	58.75	-46.45	105.20	Peak
4	5720.000	47.38	20.98	68.37	-42.43	110.80	Peak
5	5725.000	45.36	21.00	66.36	-55.84	122.20	Peak
6	5750.810	91.67	21.08	112.75	N/A	N/A	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5825MHz	Test Voltage	120V/60Hz

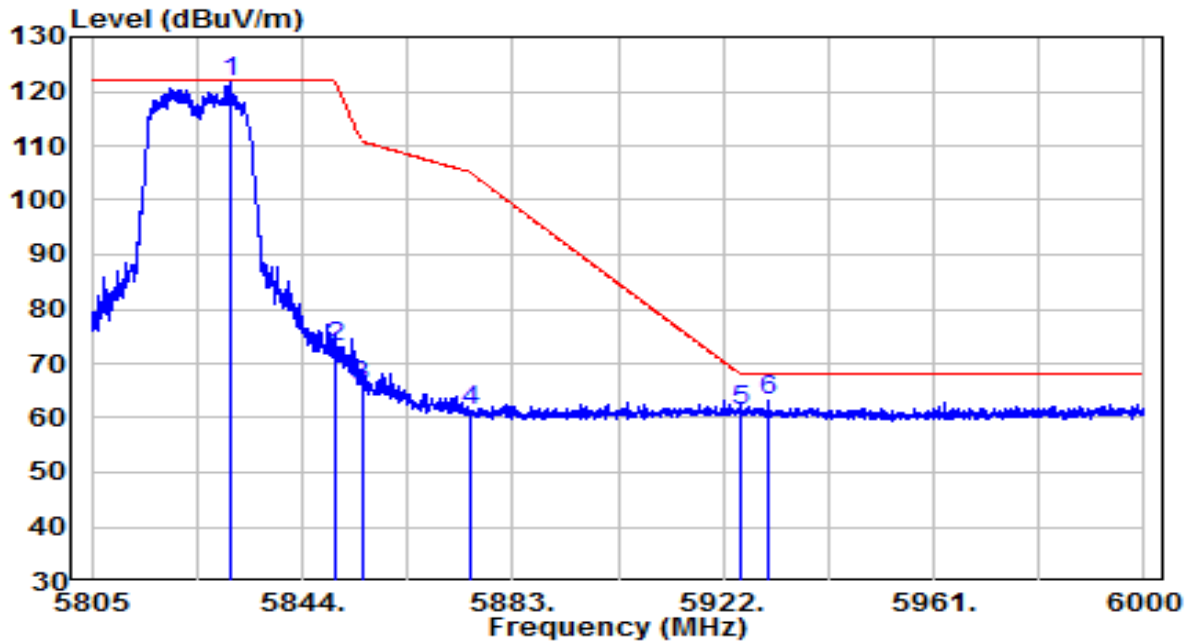


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5830.545	100.41	21.34	121.75	N/A	N/A	Peak
2	5850.000	51.73	21.40	73.13	-49.07	122.20	Peak
3	5855.000	44.36	21.42	65.78	-45.02	110.80	Peak
4	5875.000	40.02	21.49	61.50	-43.70	105.20	Peak
5	5925.000	39.77	21.65	61.42	-6.78	68.20	Peak
6	* 5930.190	41.71	21.66	63.37	-4.83	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE20 at Channel 5825MHz	Test Voltage	120V/60Hz

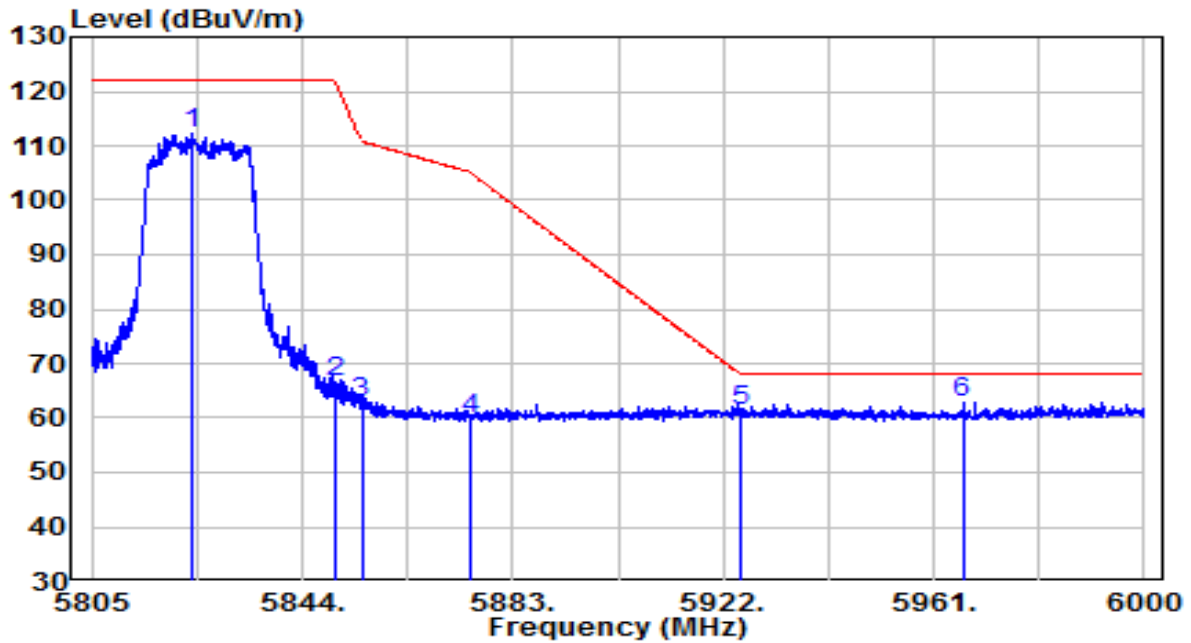


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5823.525	90.83	21.32	112.15	N/A	N/A	Peak
2	5850.000	45.12	21.40	66.52	-55.68	122.20	Peak
3	5855.000	41.51	21.42	62.93	-47.87	110.80	Peak
4	5875.000	38.31	21.49	59.80	-45.40	105.20	Peak
5	5925.000	39.54	21.65	61.19	-7.01	68.20	Peak
6	* 5966.362	40.99	21.78	62.77	-5.43	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5190MHz	Test Voltage	120V/60Hz

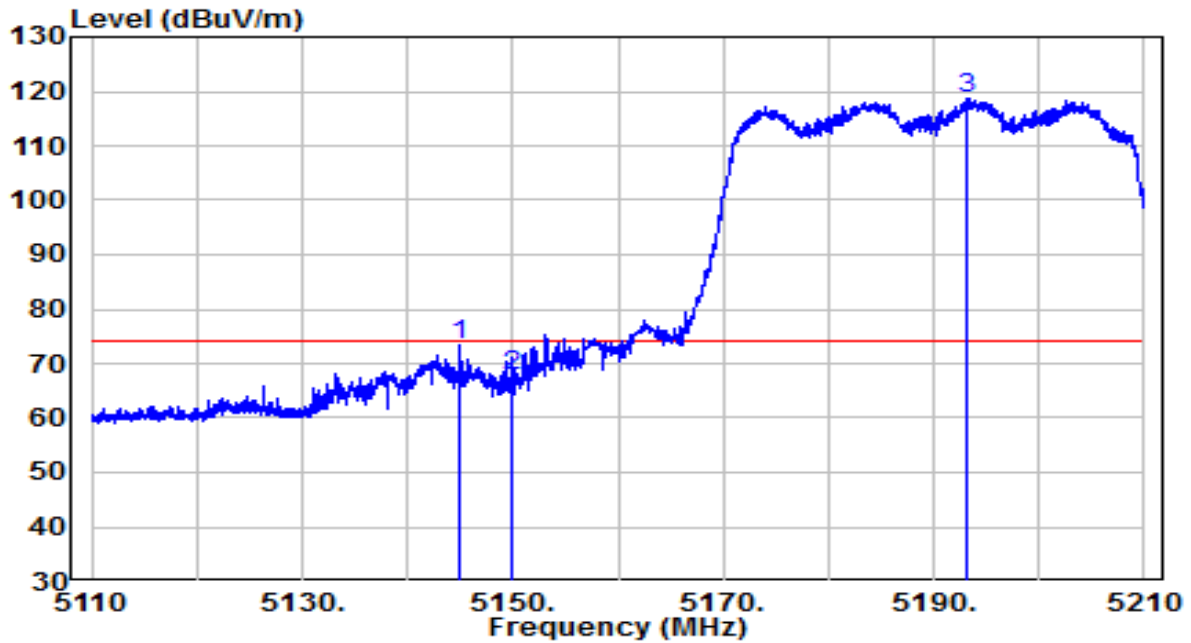


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	5144.950	53.47	19.90	73.37	-0.63	74.00	Peak
2		5150.000	47.70	19.91	67.60	-6.40	74.00	Peak
3		5193.050	98.70	19.95	118.65	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5190MHz	Test Voltage	120V/60Hz

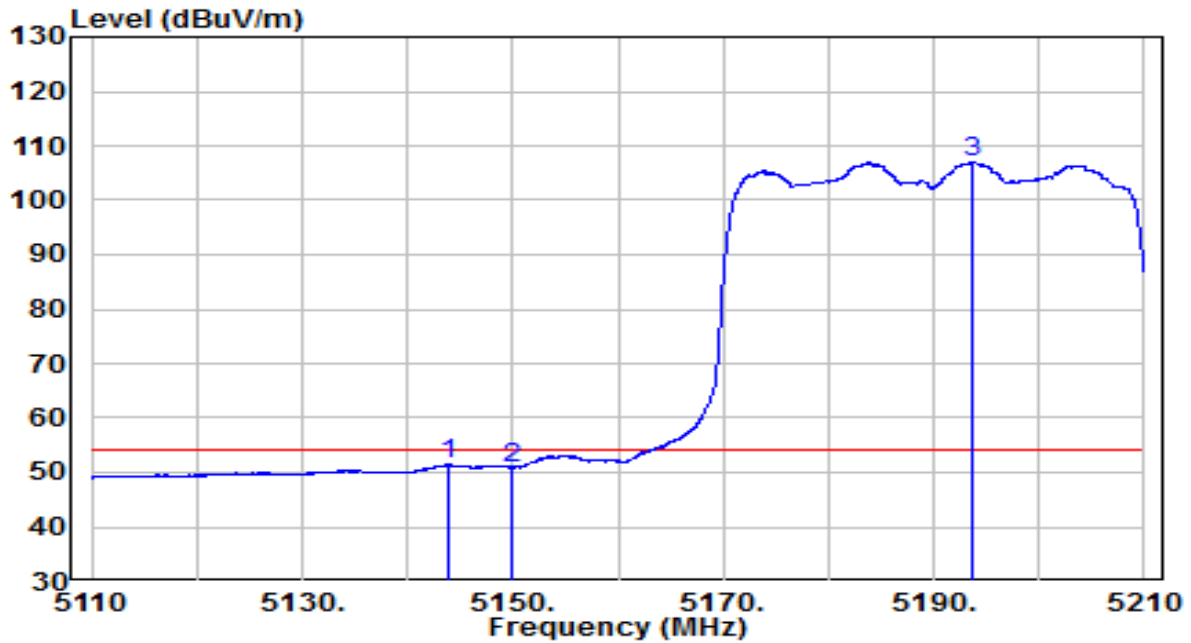


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5143.900	31.56	19.90	51.46	-2.54	54.00	Average
2	5150.000	31.02	19.91	50.93	-3.07	54.00	Average
3	5193.700	87.02	19.95	106.97	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5190MHz	Test Voltage	120V/60Hz

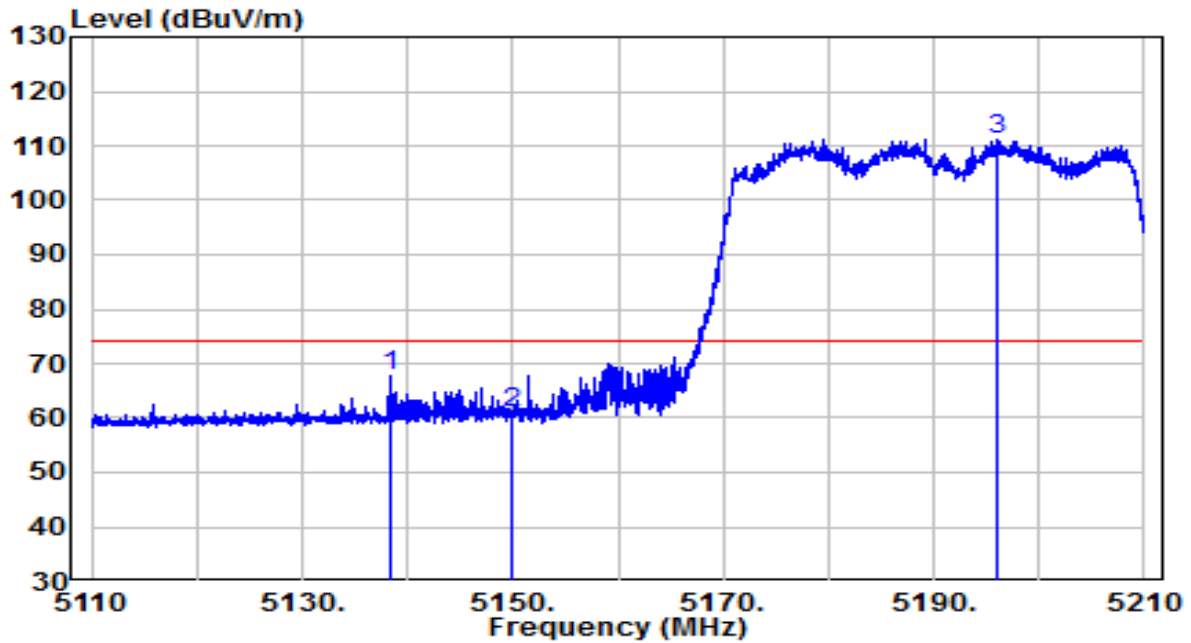


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5138.300	47.73	19.89	67.62	-6.38	74.00	Peak
2	5150.000	41.07	19.91	60.98	-13.02	74.00	Peak
3	5196.000	91.21	19.95	111.17	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5190MHz	Test Voltage	120V/60Hz

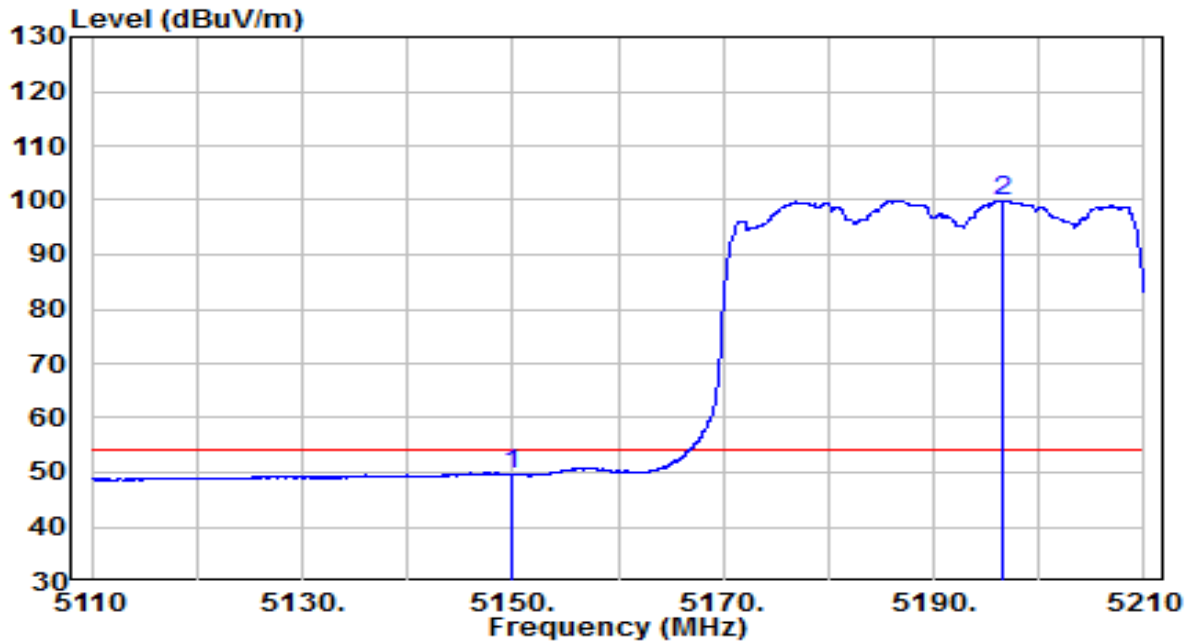


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5150.000	29.69	19.91	49.59	-4.41	54.00	Average
2	5196.500	79.98	19.95	99.94	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)- Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5230MHz	Test Voltage	120V/60Hz

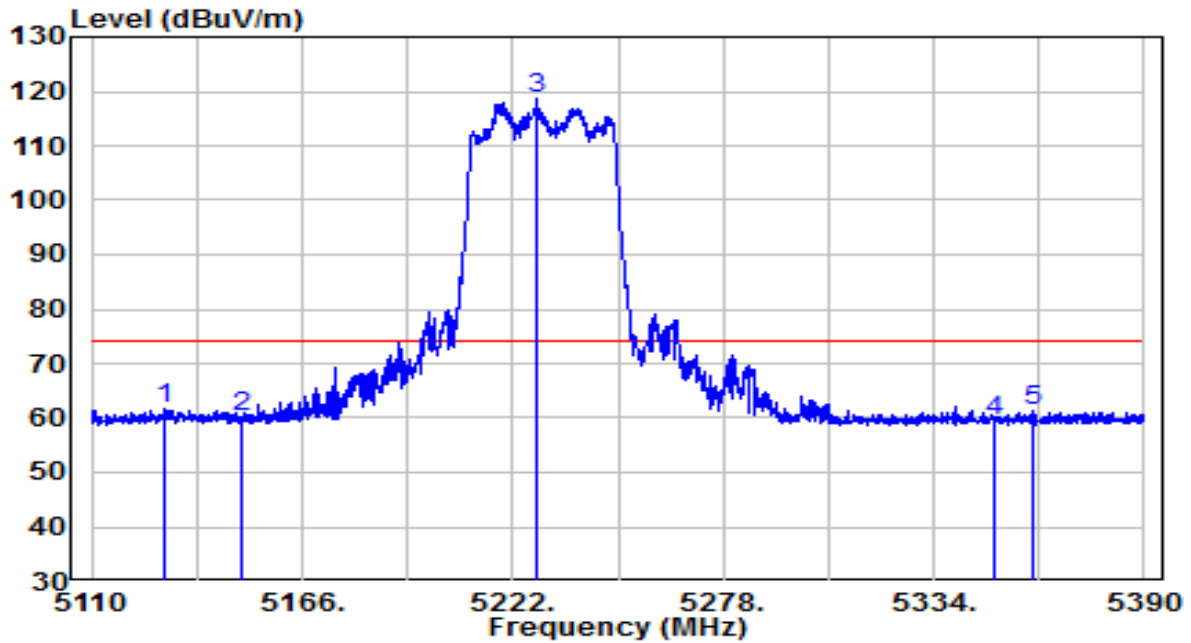


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5129.040	41.67	19.88	61.55	-12.45	74.00	Peak
2	5150.000	40.27	19.91	60.18	-13.82	74.00	Peak
3	5228.300	98.79	19.99	118.78	N/A	N/A	Peak
4	5350.000	39.37	20.11	59.48	-14.52	74.00	Peak
5	5360.460	41.24	20.12	61.37	-12.63	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5230MHz	Test Voltage	120V/60Hz

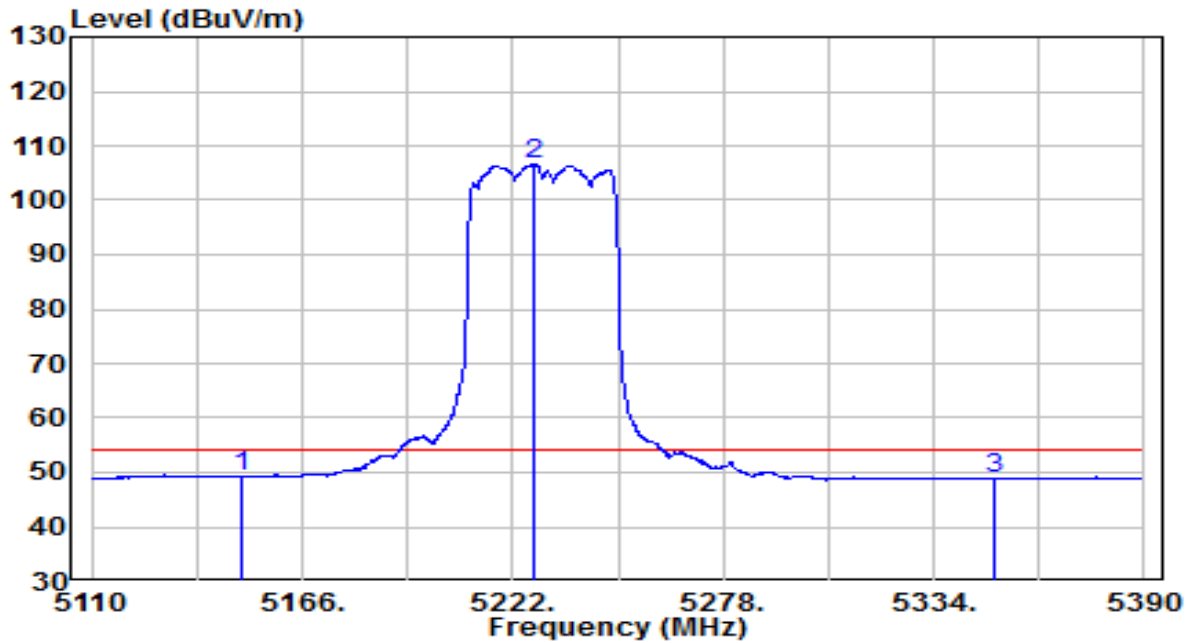


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5150.000	29.45	19.91	49.35	-4.65	54.00	Average
2	5227.460	86.78	19.99	106.77	N/A	N/A	Average
3	5350.000	28.75	20.11	48.86	-5.14	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5230MHz	Test Voltage	120V/60Hz

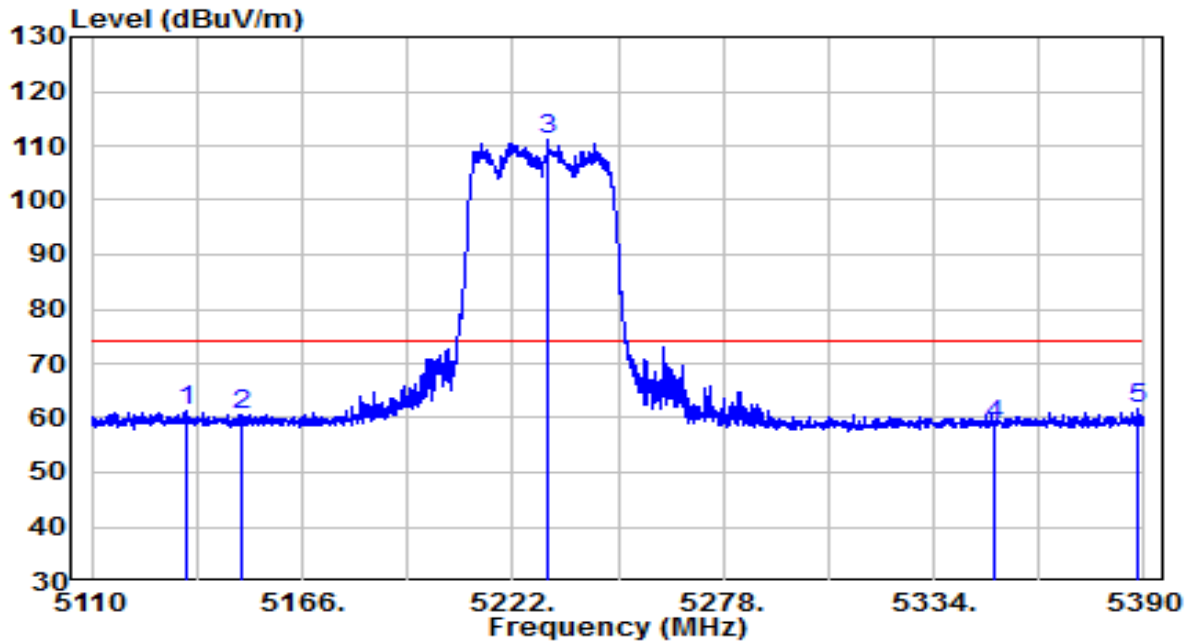


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5135.480	41.32	19.89	61.21	-12.79	74.00	Peak
2	5150.000	40.76	19.91	60.67	-13.33	74.00	Peak
3	5231.240	91.17	19.99	111.16	N/A	N/A	Peak
4	5350.000	38.53	20.11	58.64	-15.36	74.00	Peak
5	* 5388.600	41.41	20.15	61.57	-12.43	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5230MHz	Test Voltage	120V/60Hz

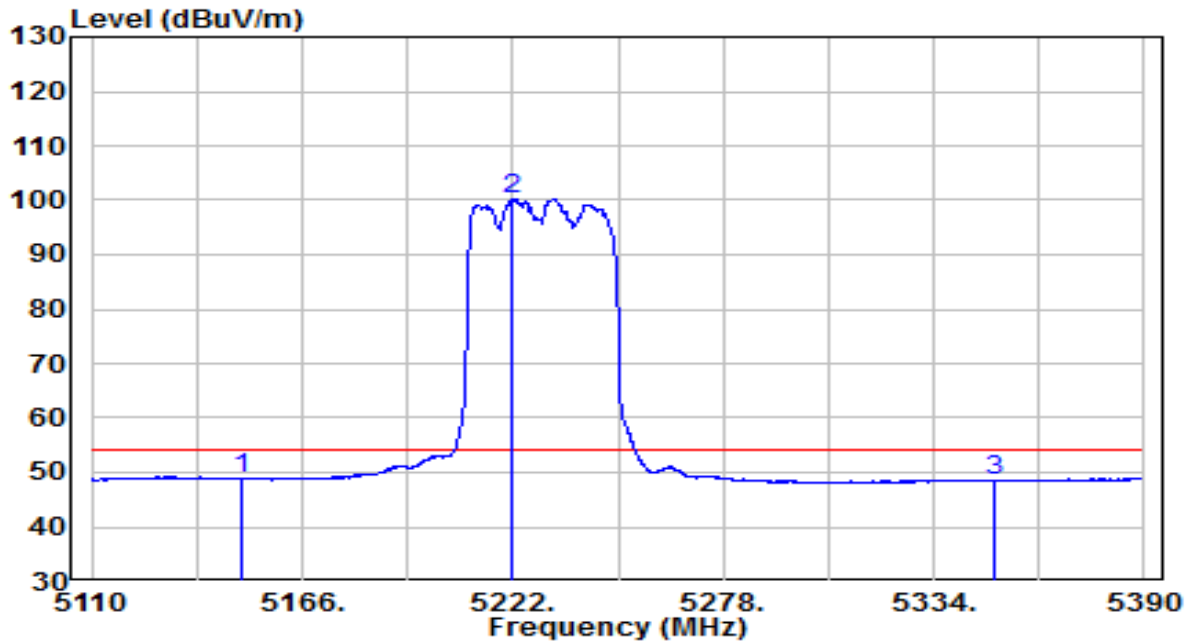


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5150.000	28.94	19.91	48.84	-5.16	54.00	Average
2	5221.720	80.21	19.98	100.19	N/A	N/A	Average
3	5350.000	28.36	20.11	48.47	-5.53	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5310MHz	Test Voltage	120V/60Hz

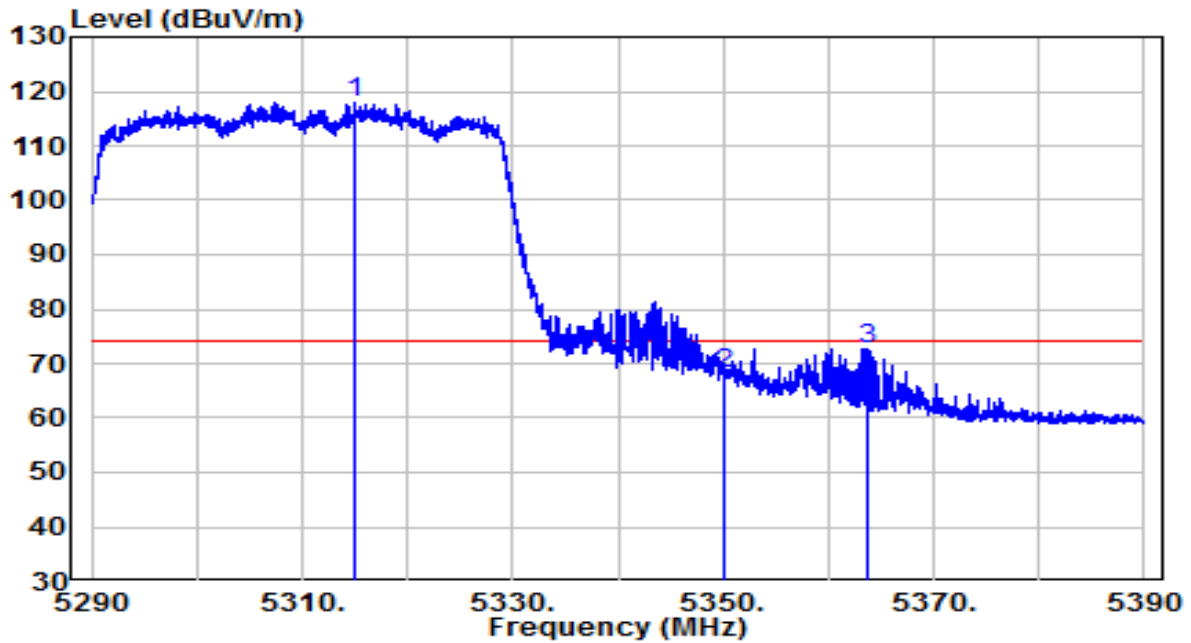


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5315.000	97.71	20.08	117.79	N/A	N/A	Peak
2	5350.000	48.04	20.11	68.15	-5.85	74.00	Peak
3	* 5363.800	52.64	20.13	72.77	-1.23	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5310MHz	Test Voltage	120V/60Hz

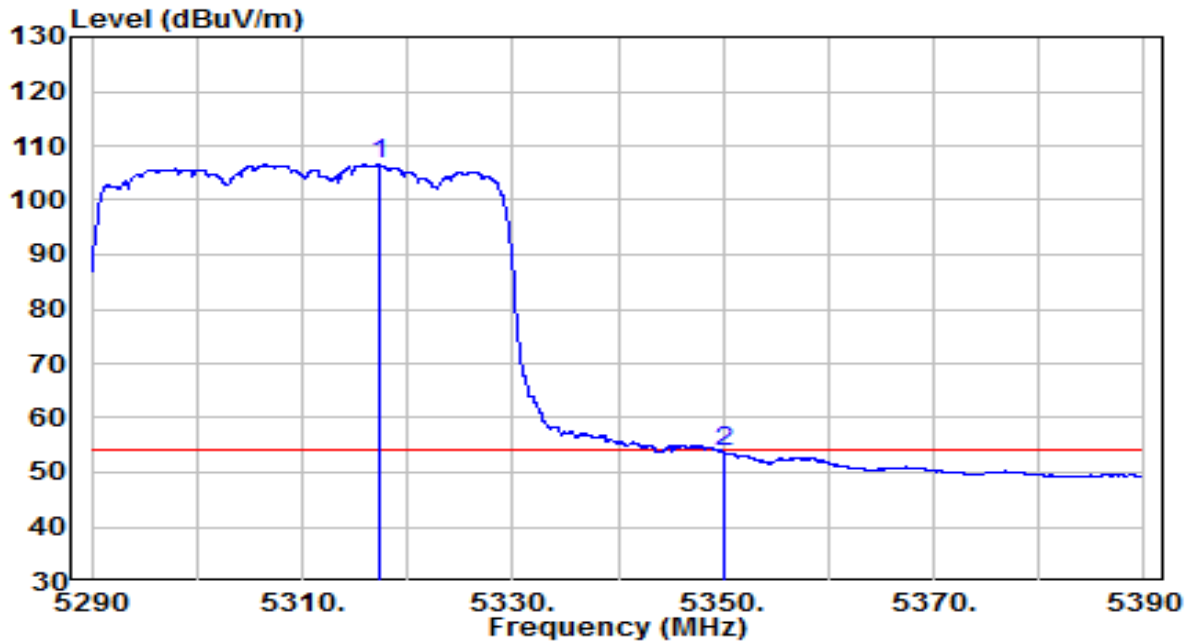


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5317.300	86.39	20.08	106.47	N/A	N/A	Average
2	* 5350.000	33.67	20.11	53.78	-0.22	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5310MHz	Test Voltage	120V/60Hz

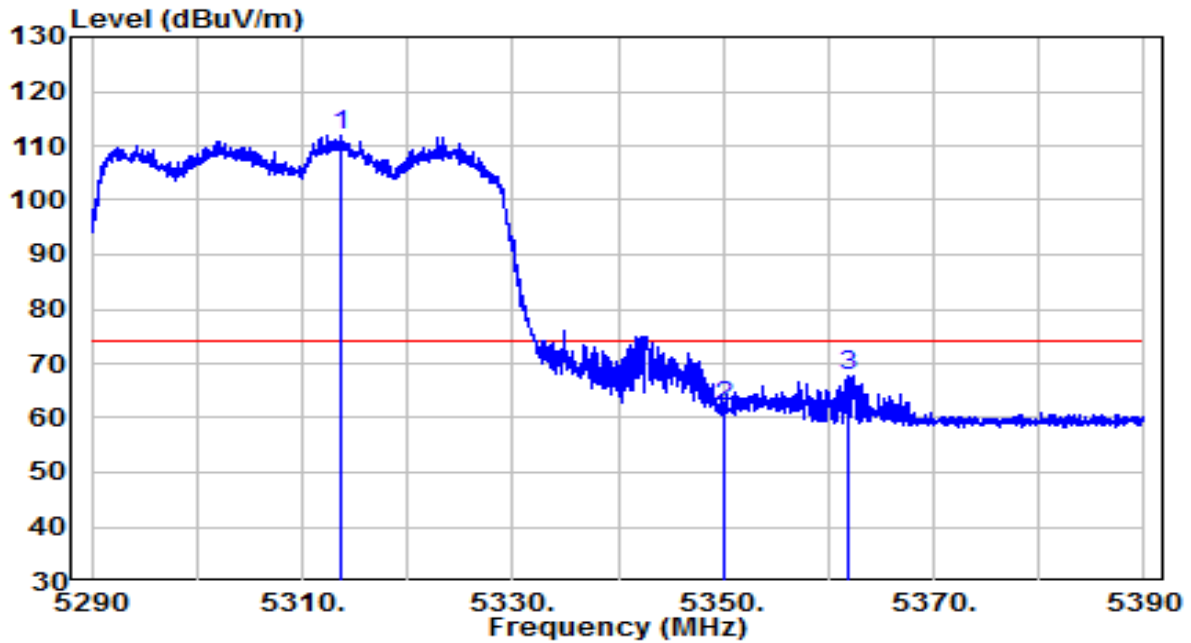


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5313.650	91.88	20.08	111.95	N/A	N/A	Peak
2	5350.000	42.13	20.11	62.25	-11.75	74.00	Peak
3	* 5361.900	47.55	20.13	67.67	-6.33	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5310MHz	Test Voltage	120V/60Hz

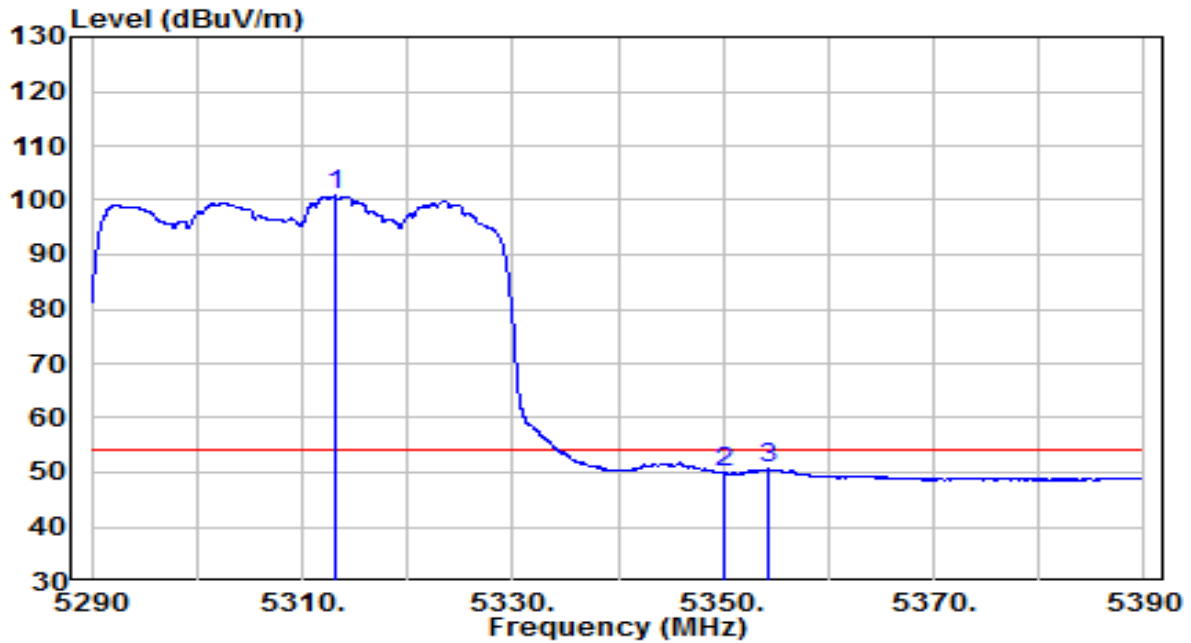


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5313.200	80.76	20.08	100.83	N/A	N/A	Average
2	5350.000	29.71	20.11	49.82	-4.18	54.00	Average
3	* 5354.250	30.55	20.12	50.66	-3.34	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5510MHz	Test Voltage	120V/60Hz

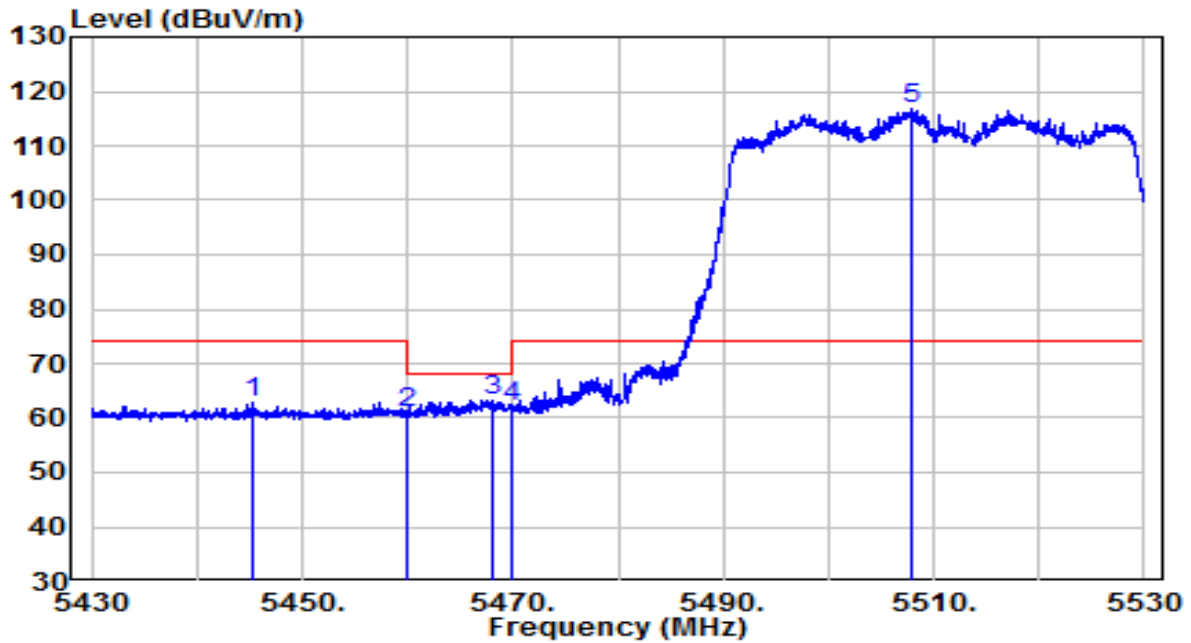


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5445.350	42.50	20.21	62.72	-11.28	74.00	Peak
2	5460.000	40.63	20.23	60.86	-7.34	68.20	Peak
3	* 5468.000	43.14	20.24	63.38	-4.82	68.20	Peak
4	5470.000	41.80	20.24	62.03	-6.17	68.20	Peak
5	5507.800	96.67	20.30	116.96	N/A	N/A	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5510MHz	Test Voltage	120V/60Hz

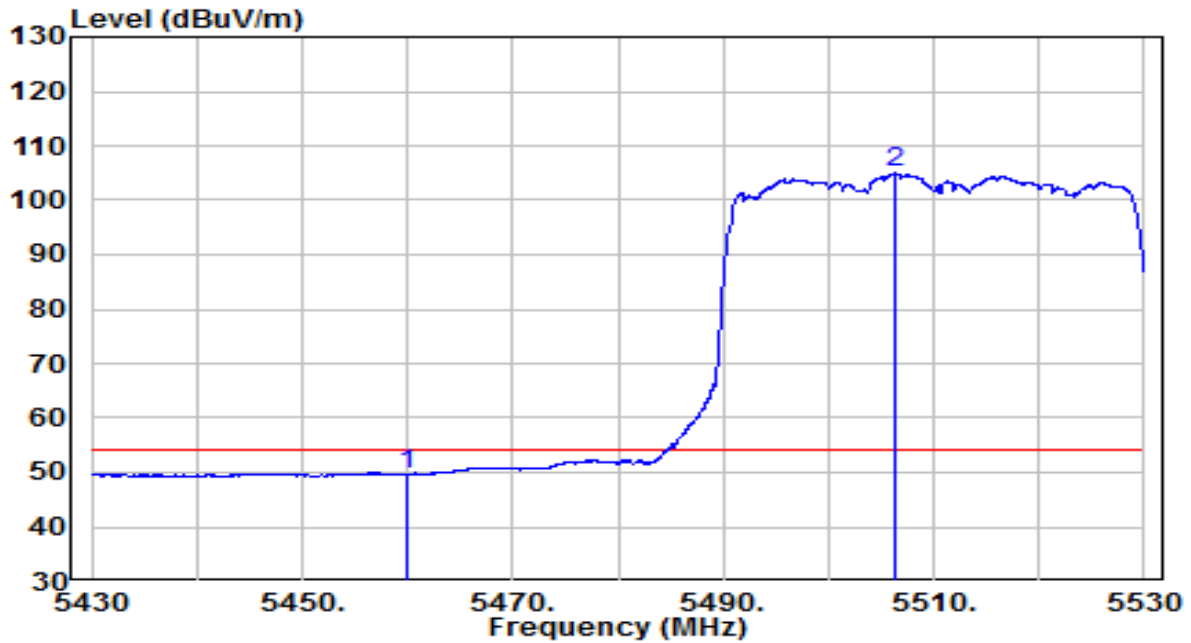


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5460.000	29.48	20.23	49.71	-4.29	54.00	Average
2	5506.300	84.62	20.29	104.91	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5510MHz	Test Voltage	120V/60Hz

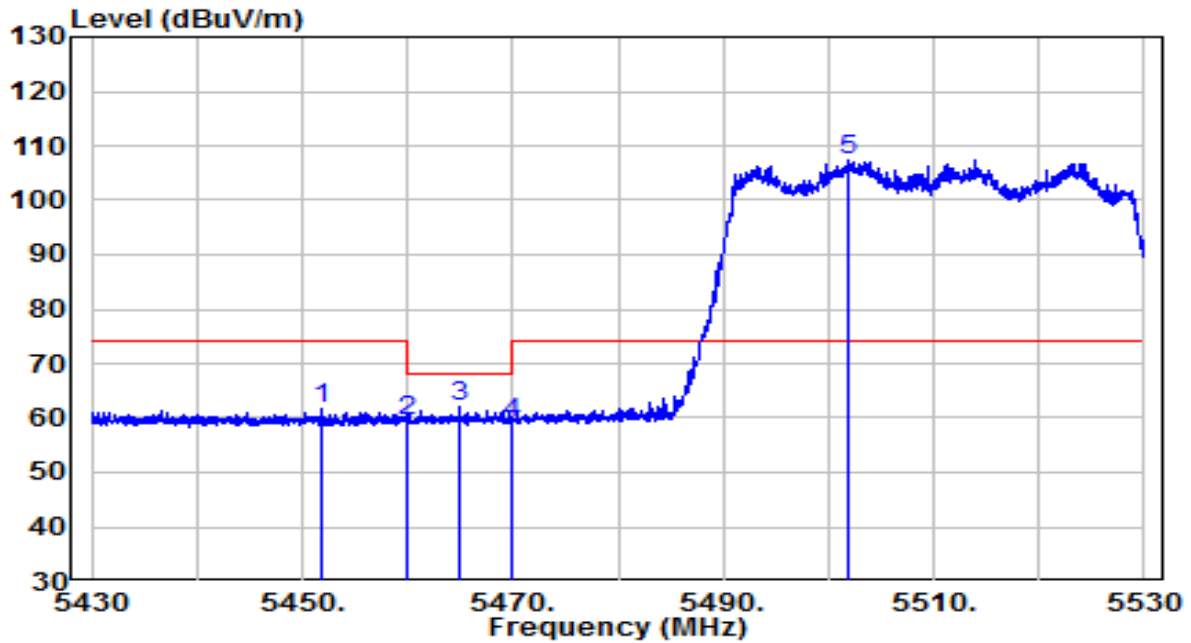


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5451.950	41.42	20.22	61.64	-12.36	74.00	Peak
2	5460.000	39.17	20.23	59.39	-8.81	68.20	Peak
3	* 5465.000	41.72	20.23	61.96	-6.24	68.20	Peak
4	5470.000	38.89	20.24	59.13	-9.07	68.20	Peak
5	5501.800	87.04	20.28	107.32	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5510MHz	Test Voltage	120V/60Hz

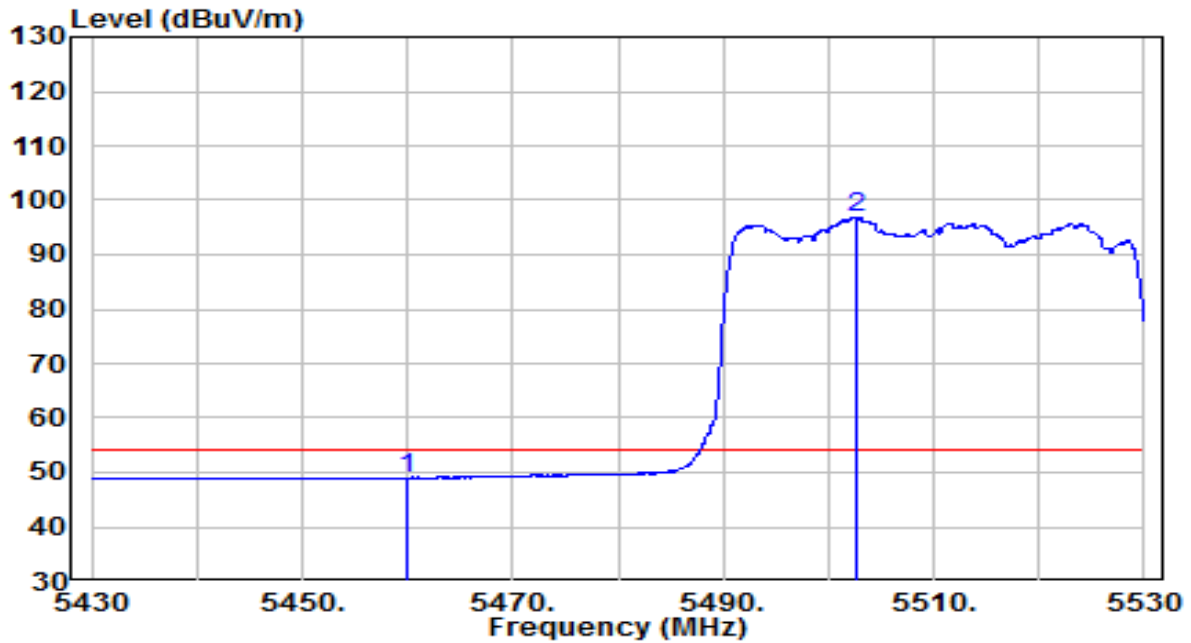


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5460.000	28.74	20.23	48.97	-5.03	54.00	Average
2	5502.600	76.60	20.28	96.88	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5670MHz	Test Voltage	120V/60Hz

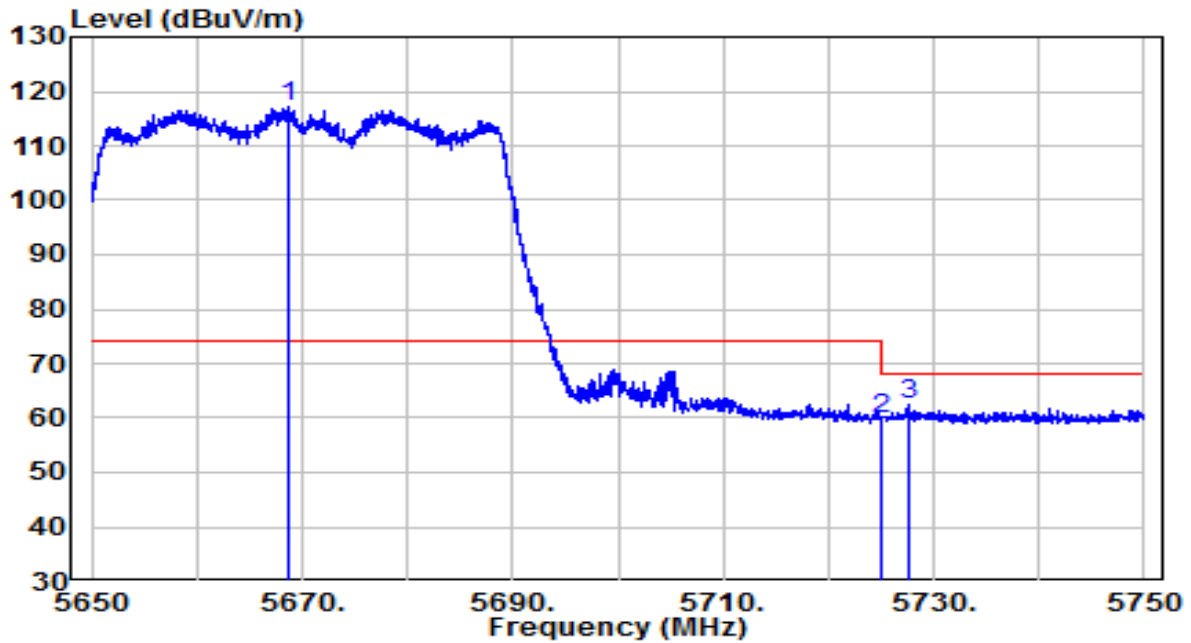


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5668.650	96.36	20.82	117.18	N/A	N/A	Peak
2	5725.000	38.70	21.00	59.70	-8.50	68.20	Peak
3	* 5727.550	41.41	21.01	62.42	-5.78	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5670MHz	Test Voltage	120V/60Hz

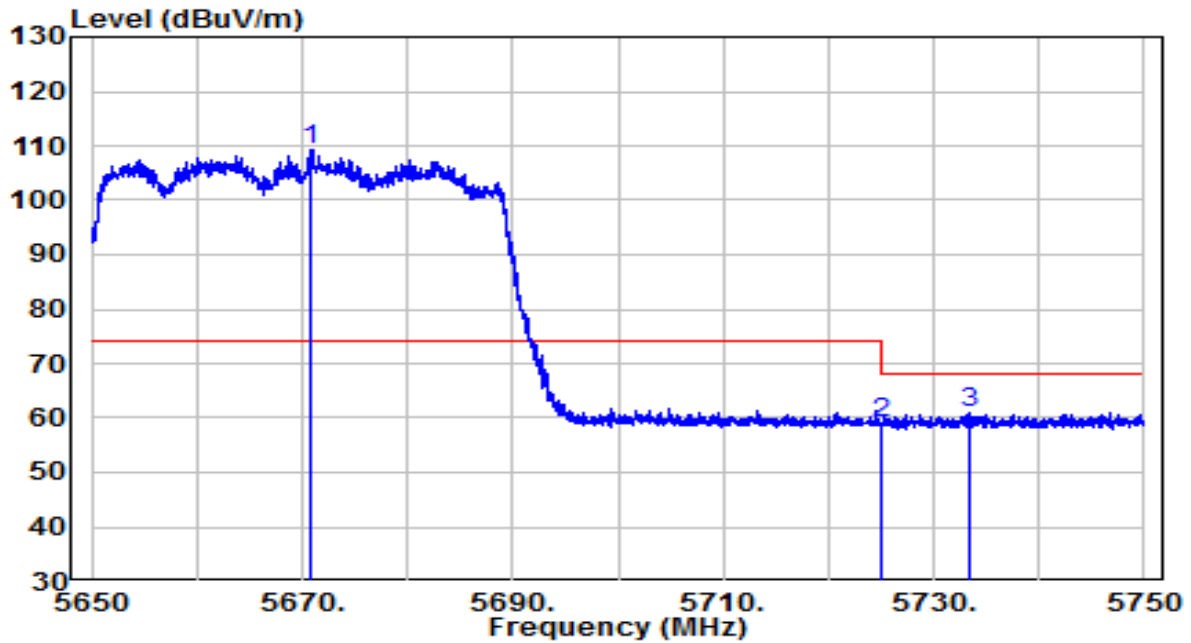


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5670.700	88.55	20.82	109.38	N/A	N/A	Peak
2	5725.000	38.14	21.00	59.14	-9.06	68.20	Peak
3	* 5733.300	40.02	21.03	61.04	-7.16	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5755MHz	Test Voltage	120V/60Hz

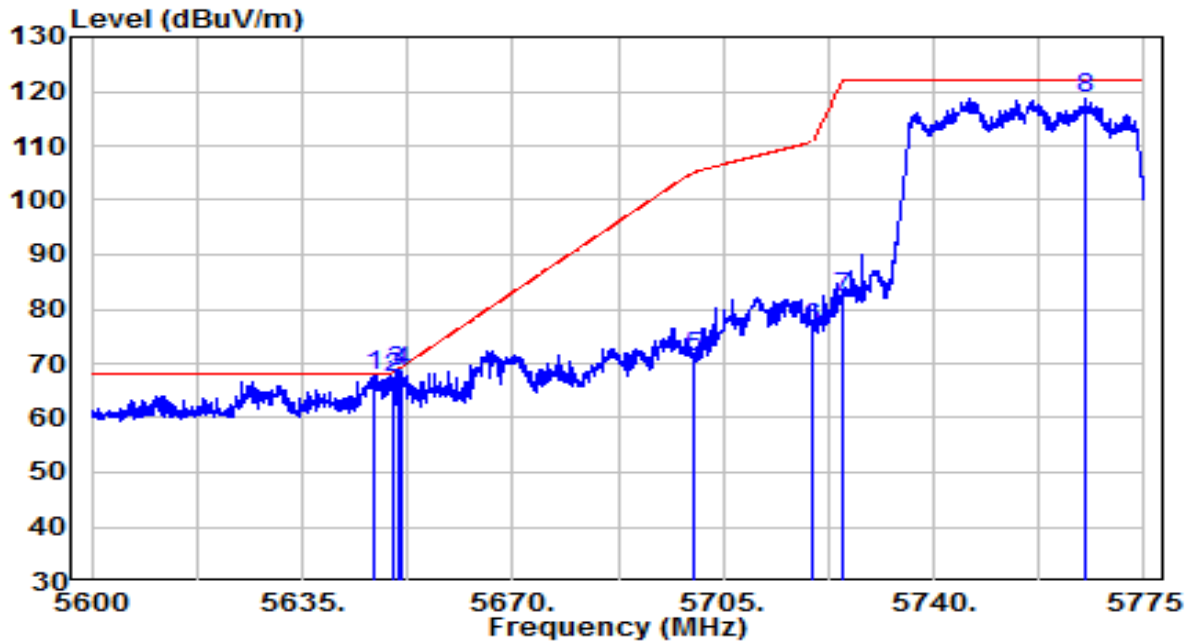


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5646.987	46.97	20.75	67.72	-0.48	68.20	Peak
2	5650.000	46.57	20.76	67.32	-0.88	68.20	Peak
3	* 5650.837	47.63	20.76	68.39	-0.43	68.82	Peak
4	5651.712	47.68	20.76	68.44	-1.03	69.47	Peak
5	5700.000	50.14	20.92	71.06	-34.14	105.20	Peak
6	5720.000	55.51	20.98	76.50	-34.30	110.80	Peak
7	5725.000	61.10	21.00	82.10	-40.10	122.20	Peak
8	5765.375	97.49	21.13	118.62	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5755MHz	Test Voltage	120V/60Hz

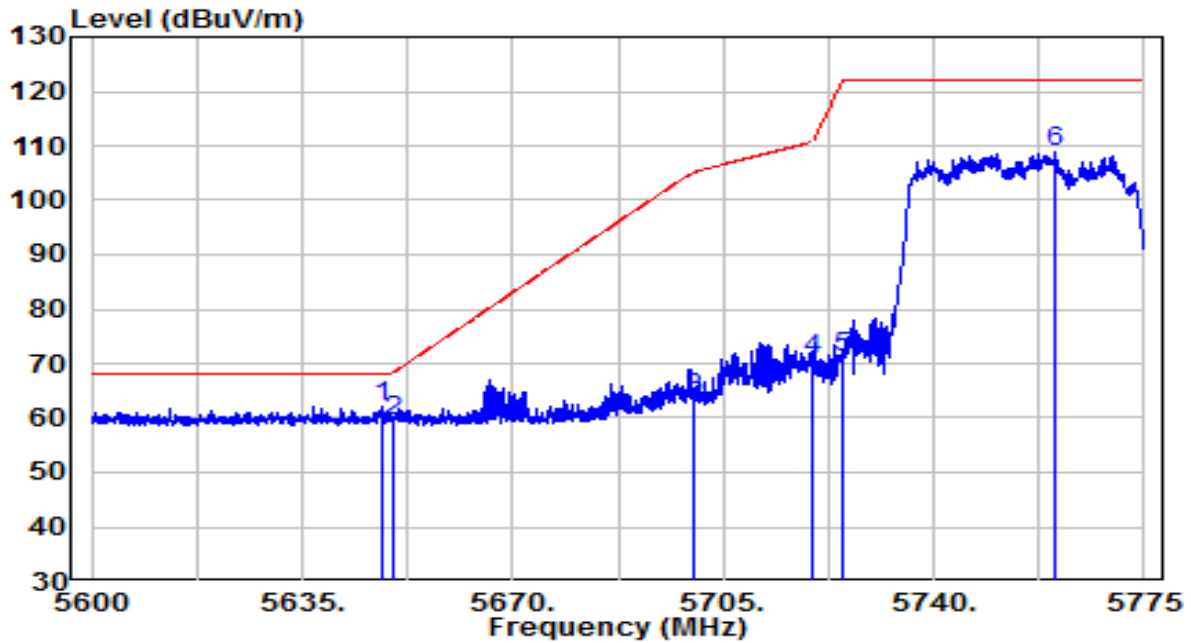


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5648.300	41.43	20.75	62.18	-6.02	68.20	Peak
2	5650.000	38.68	20.76	59.43	-8.77	68.20	Peak
3	5700.000	42.84	20.92	63.76	-41.44	105.20	Peak
4	5720.000	49.74	20.98	70.72	-40.08	110.80	Peak
5	5725.000	50.02	21.00	71.02	-51.18	122.20	Peak
6	5760.300	87.90	21.11	109.01	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5795MHz	Test Voltage	120V/60Hz

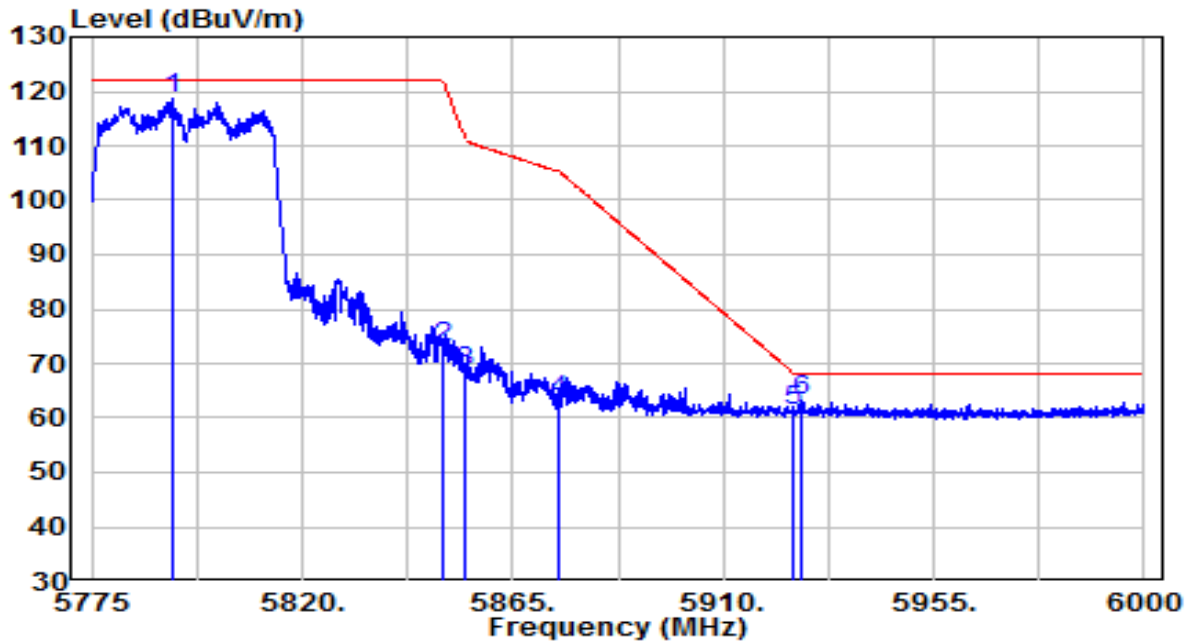


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5792.212	97.57	21.22	118.78	N/A	N/A	Peak
2	5850.000	51.47	21.40	72.87	-49.33	122.20	Peak
3	5855.000	47.08	21.42	68.50	-42.30	110.80	Peak
4	5875.000	41.65	21.49	63.13	-42.07	105.20	Peak
5	5925.000	39.58	21.65	61.23	-6.97	68.20	Peak
6	* 5926.875	41.41	21.65	63.07	-5.13	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE40 at Channel 5795MHz	Test Voltage	120V/60Hz

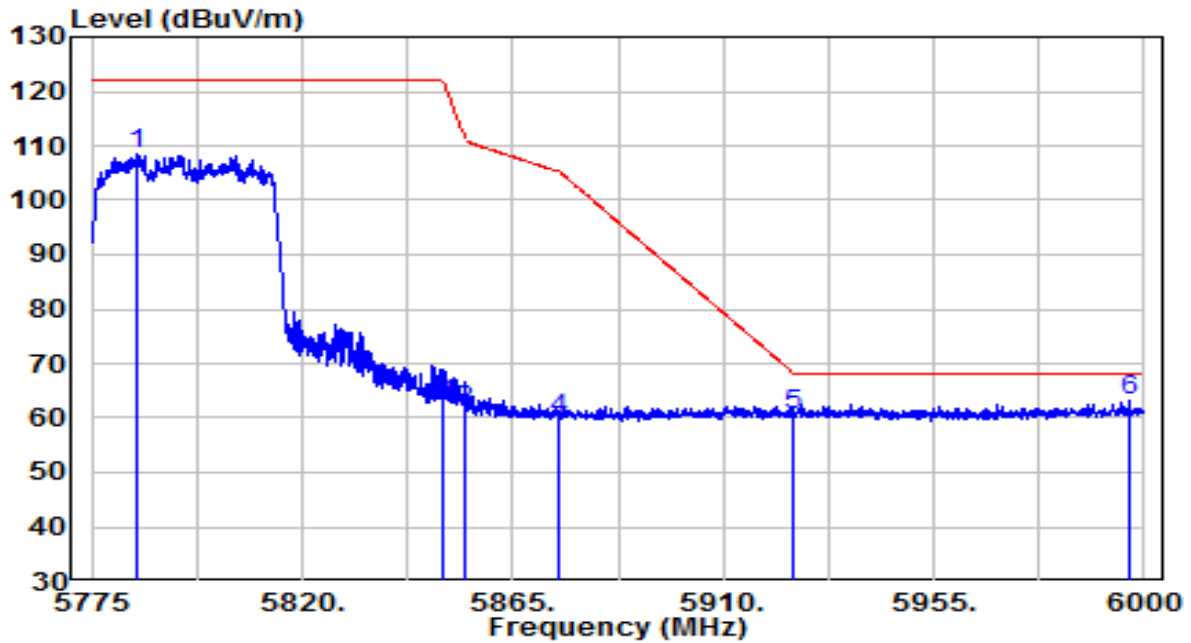


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5784.675	87.40	21.19	108.60	N/A	N/A	Peak
2	5850.000	41.05	21.40	62.45	-59.75	122.20	Peak
3	5855.000	39.78	21.42	61.20	-49.60	110.80	Peak
4	5875.000	38.51	21.49	59.99	-45.21	105.20	Peak
5	5925.000	38.99	21.65	60.64	-7.56	68.20	Peak
6	* 5996.737	41.22	21.88	63.10	-5.10	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

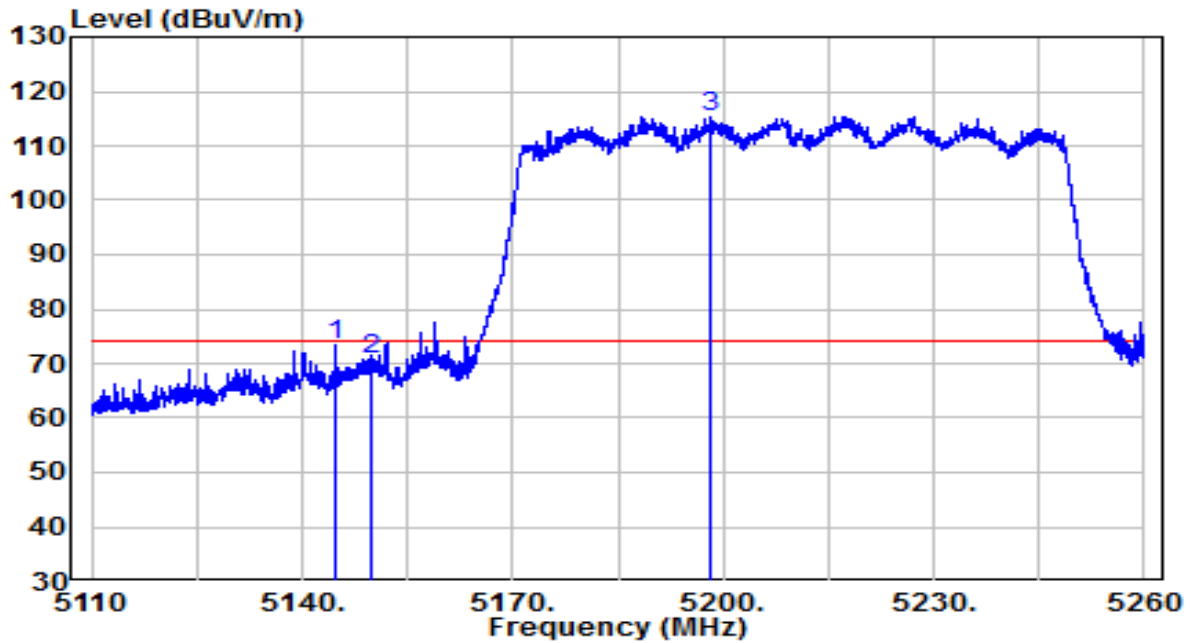


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	5144.875	53.59	19.90	73.49	-0.51	74.00	Peak
2		5150.000	50.90	19.91	70.80	-3.20	74.00	Peak
3		5198.275	95.37	19.96	115.33	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)- Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

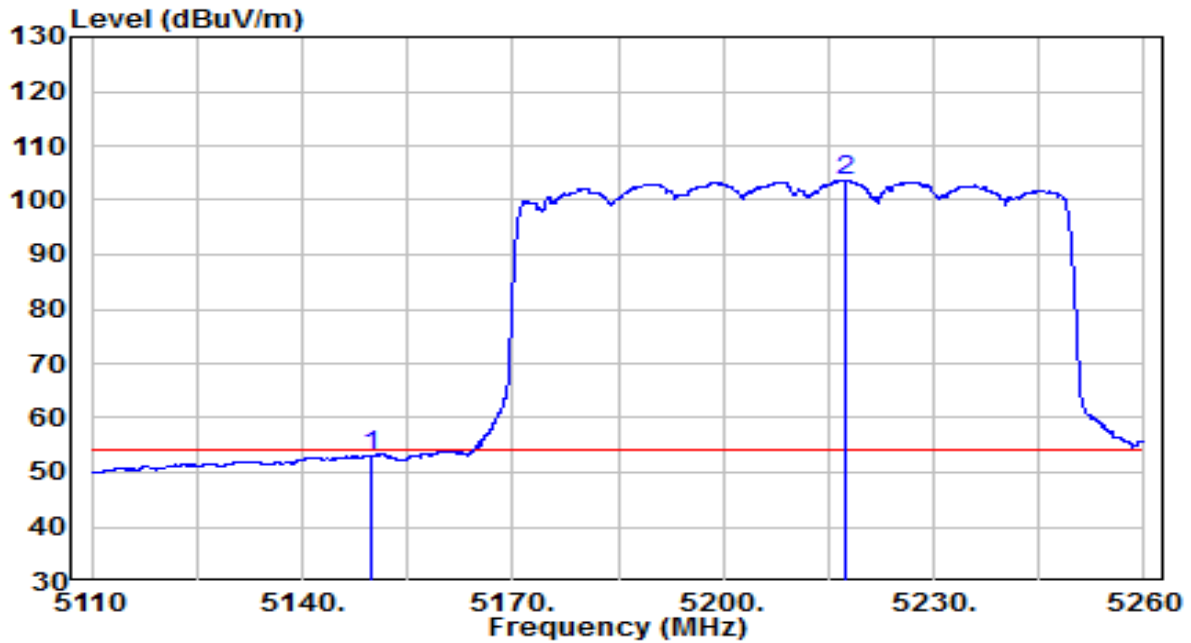


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5150.000	33.17	19.91	53.07	-0.93	54.00	Average
2	5217.475	83.77	19.98	103.75	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

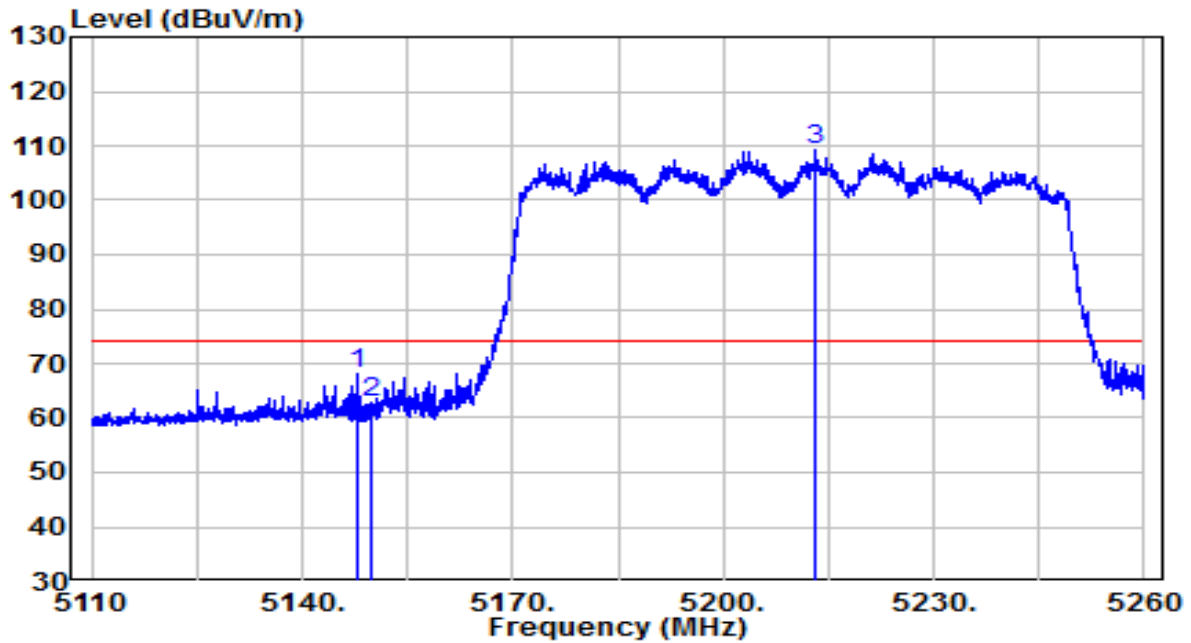


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	5148.025	48.24	19.90	68.14	-5.86	74.00	Peak
2		5150.000	42.93	19.91	62.83	-11.17	74.00	Peak
3		5213.050	89.35	19.97	109.33	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

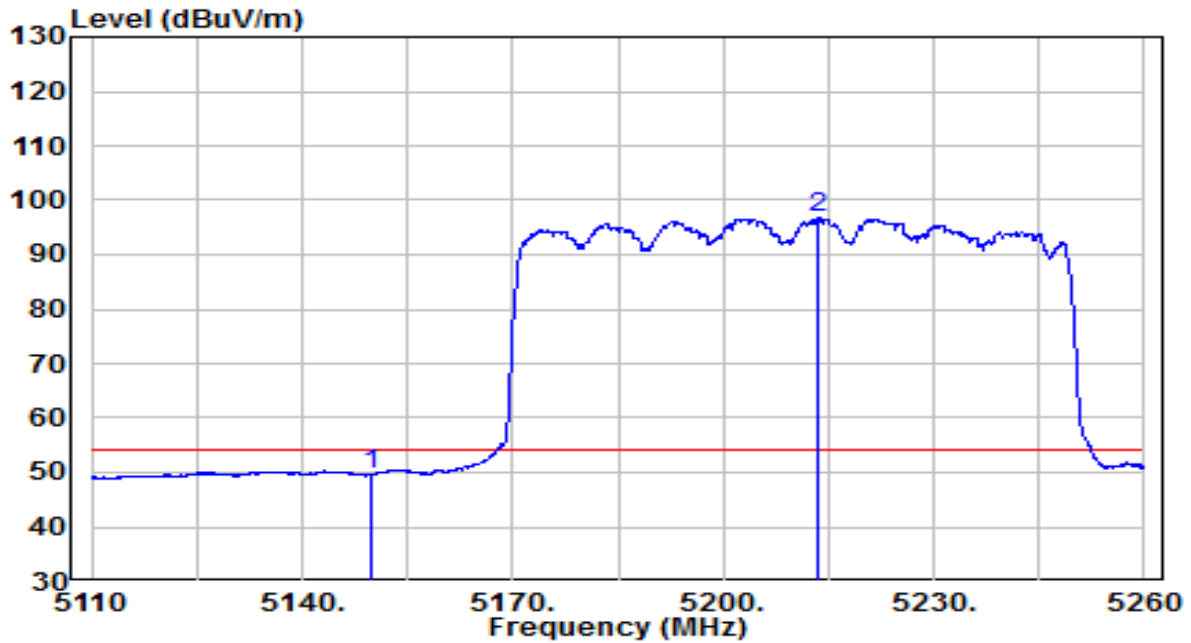


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5150.000	29.68	19.91	49.59	-4.41	54.00	Average
2	5213.650	76.70	19.97	96.68	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5290MHz	Test Voltage	120V/60Hz

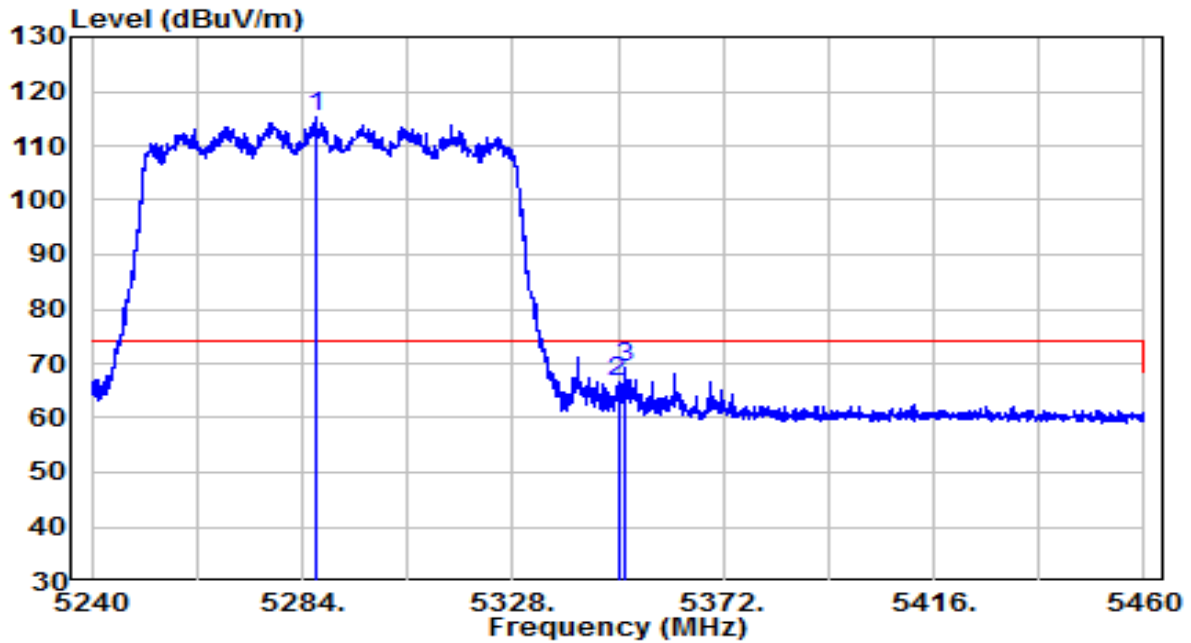


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5286.860	95.24	20.05	115.29	N/A	N/A	Peak
2	5350.000	46.61	20.11	66.72	-7.28	74.00	Peak
3	* 5351.650	49.07	20.12	69.19	-4.81	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5290MHz	Test Voltage	120V/60Hz

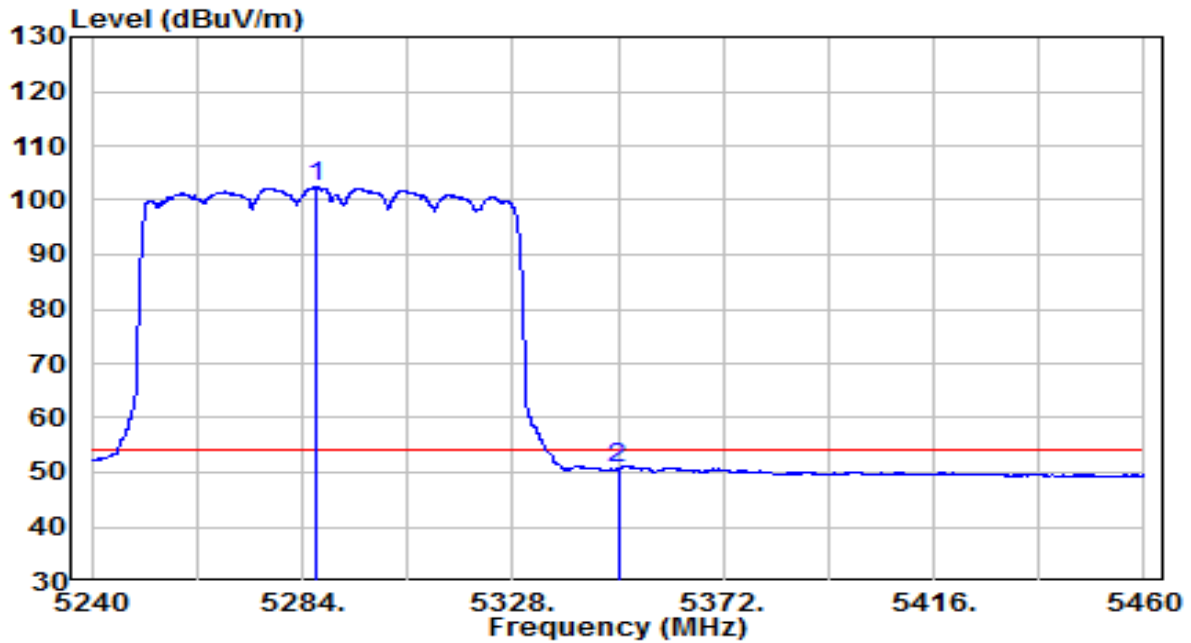


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5286.970	82.47	20.05	102.51	N/A	N/A	Average
2	* 5350.000	30.61	20.11	50.72	-3.28	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5290MHz	Test Voltage	120V/60Hz

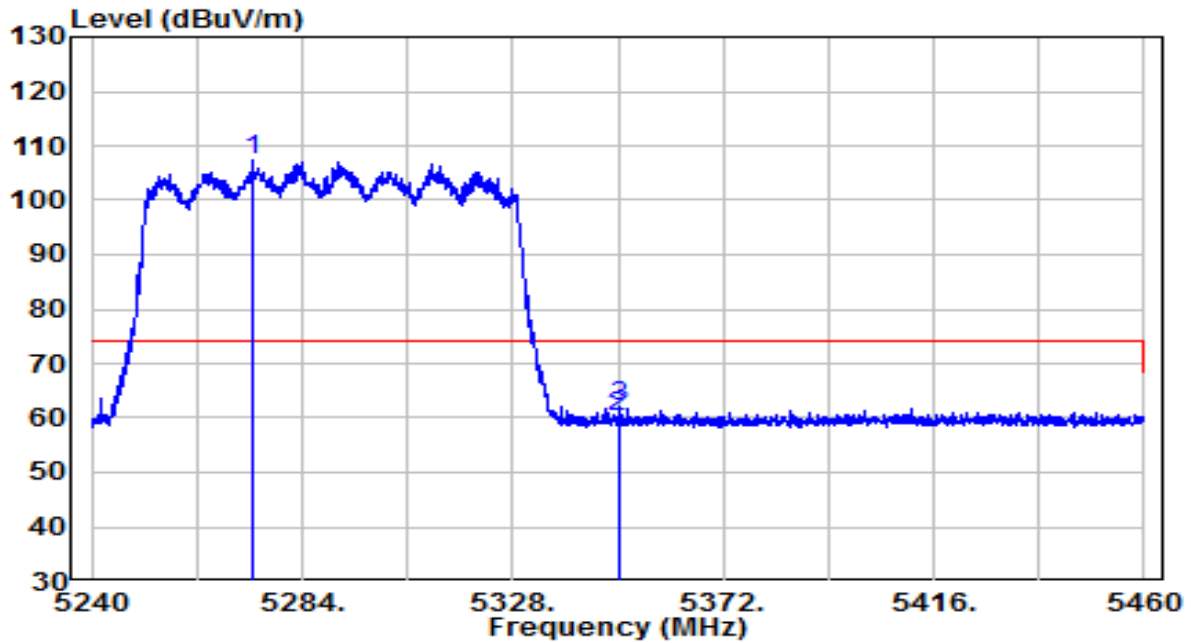


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5273.550	87.15	20.03	107.18	N/A	N/A	Peak
2	5350.000	39.94	20.11	60.05	-13.95	74.00	Peak
3	* 5350.550	42.11	20.11	62.22	-11.78	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5290MHz	Test Voltage	120V/60Hz

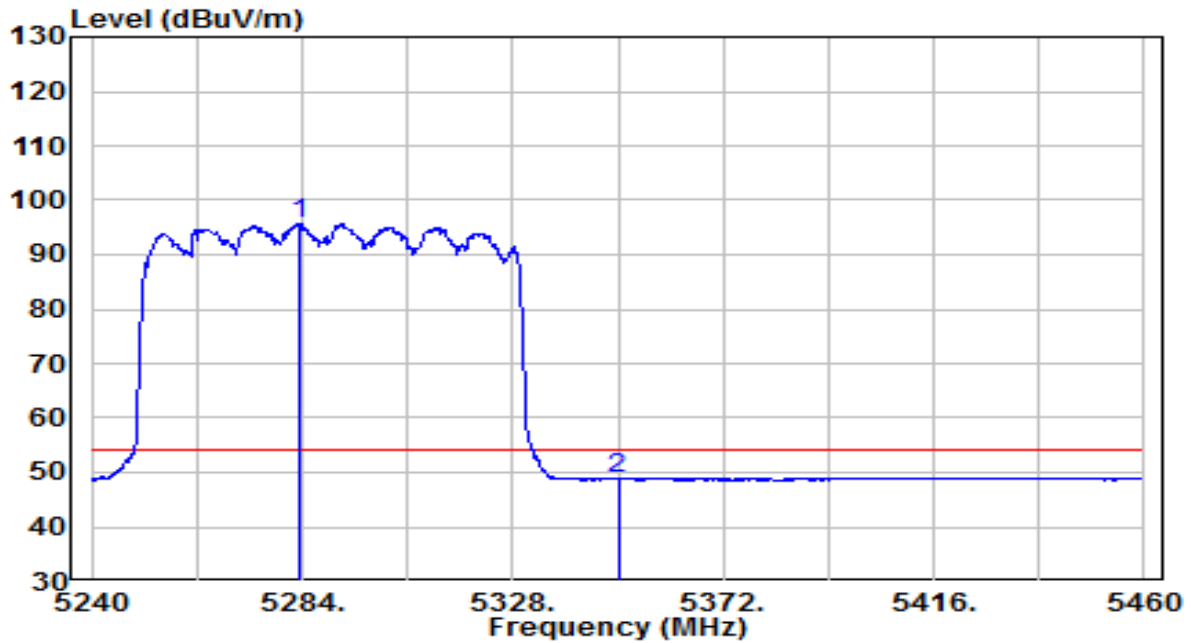


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5283.340	75.72	20.04	95.77	N/A	N/A	Average
2	* 5350.000	28.78	20.11	48.89	-5.11	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5530MHz	Test Voltage	120V/60Hz

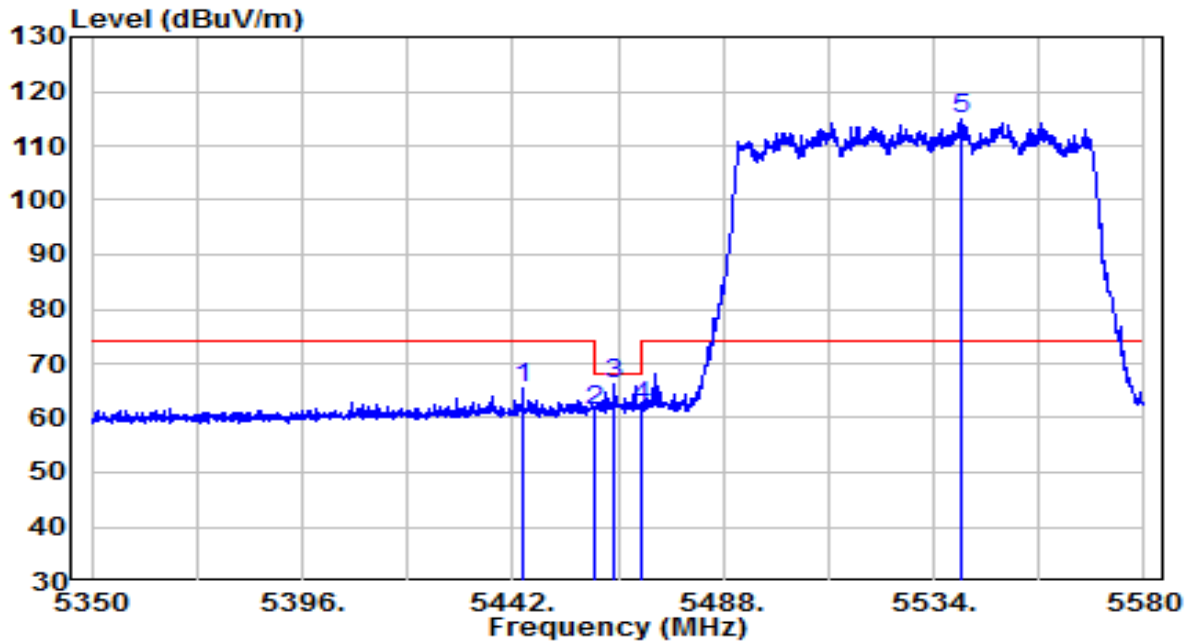


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5444.185	45.44	20.21	65.66	-8.34	74.00	Peak
2	5460.000	41.12	20.23	61.35	-6.85	68.20	Peak
3	* 5464.310	46.01	20.23	66.24	-1.96	68.20	Peak
4	5470.000	41.97	20.24	62.21	-5.99	68.20	Peak
5	5540.210	94.45	20.40	114.85	N/A	N/A	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5530MHz	Test Voltage	120V/60Hz

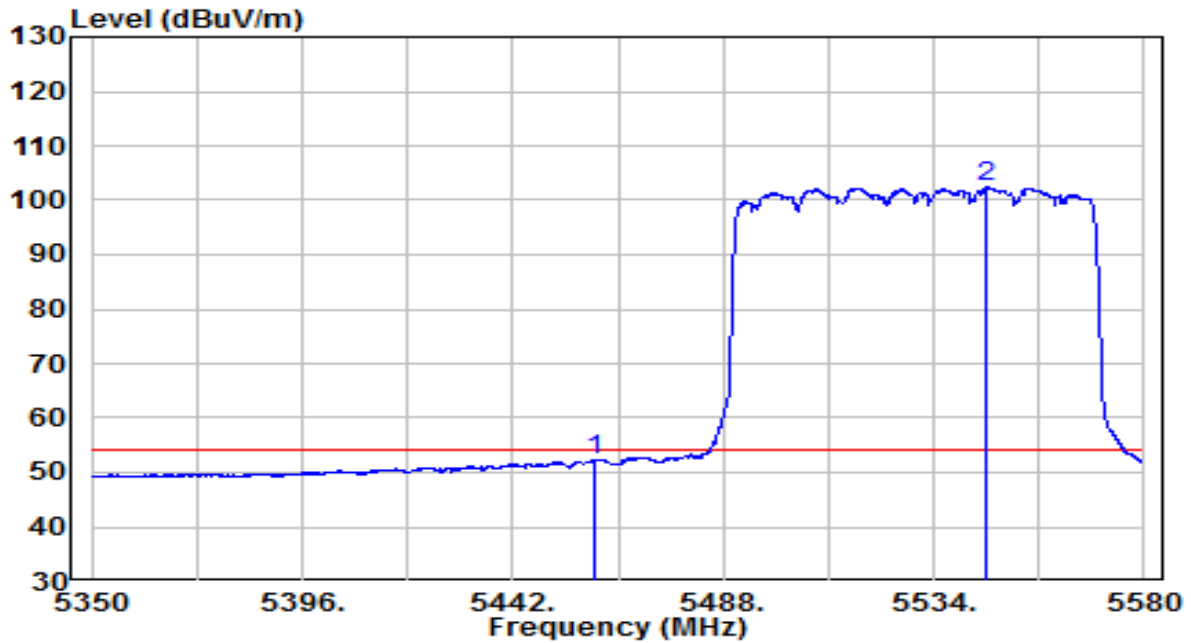


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5460.000	31.92	20.23	52.15	-1.85	54.00	Average
2	5545.500	81.91	20.42	102.33	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5530MHz	Test Voltage	120V/60Hz

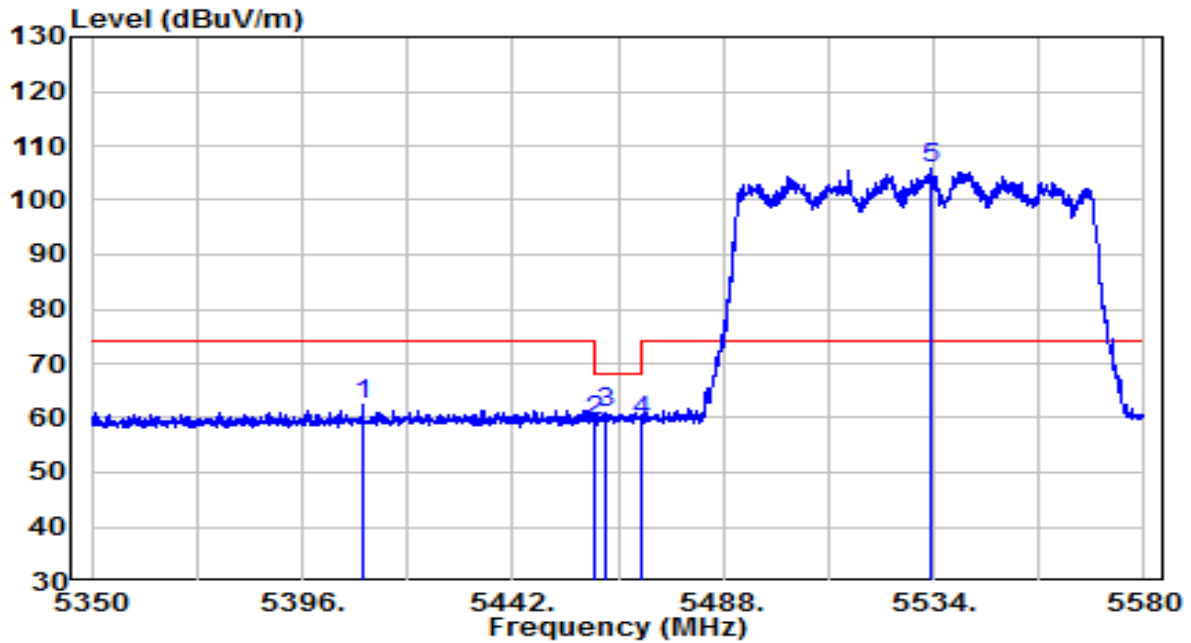


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5409.225	42.28	20.18	62.46	-11.54	74.00	Peak
2	5460.000	39.18	20.23	59.40	-8.80	68.20	Peak
3	* 5462.470	40.89	20.23	61.12	-7.08	68.20	Peak
4	5470.000	39.20	20.24	59.43	-8.77	68.20	Peak
5	5533.310	85.40	20.38	105.78	N/A	N/A	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5530MHz	Test Voltage	120V/60Hz

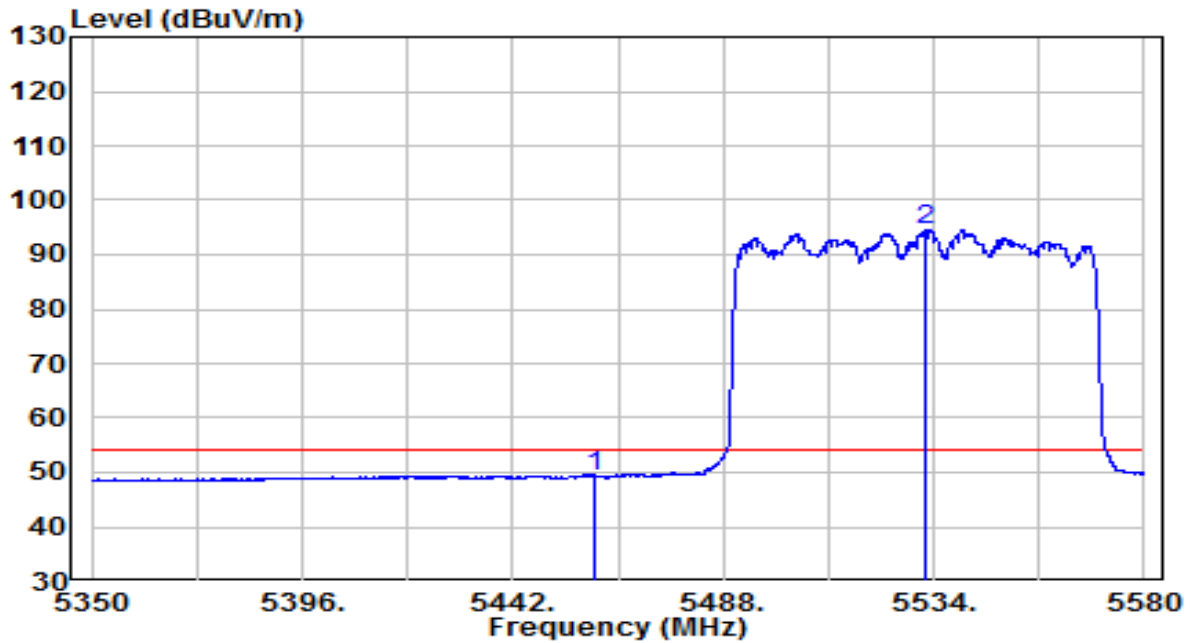


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5460.000	29.07	20.23	49.30	-4.70	54.00	Average
2	5532.390	74.14	20.37	94.52	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5610MHz	Test Voltage	120V/60Hz

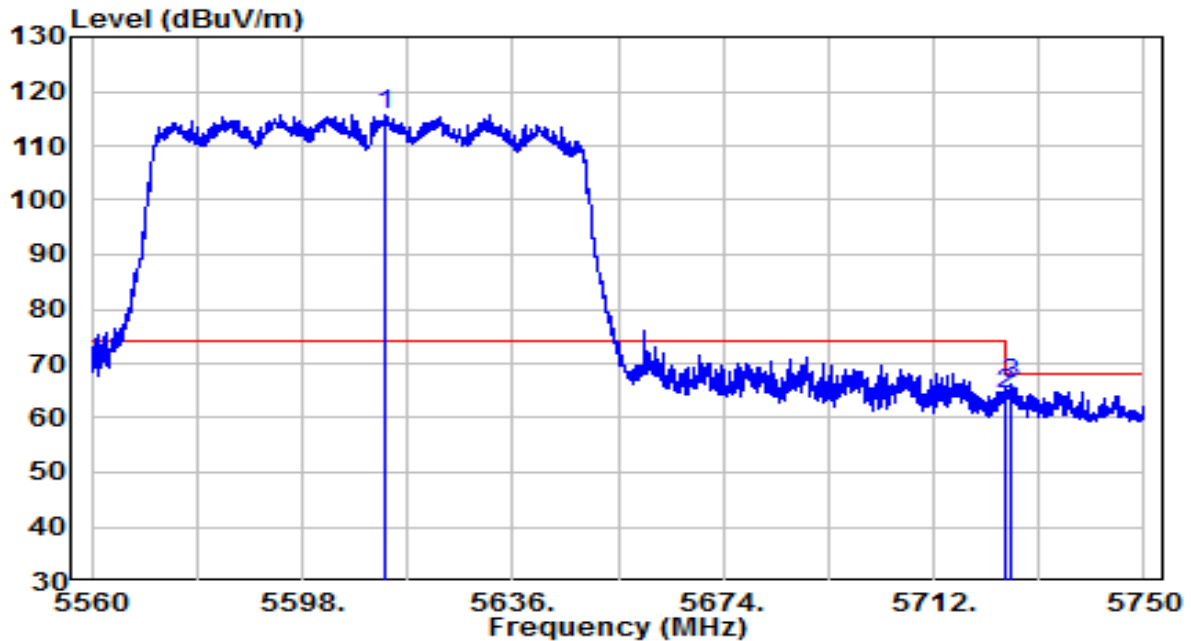


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5612.915	95.18	20.64	115.81	N/A	N/A	Peak
2	5725.000	43.24	21.00	64.24	-3.96	68.20	Peak
3	* 5725.775	45.17	21.00	66.17	-2.03	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5610MHz	Test Voltage	120V/60Hz

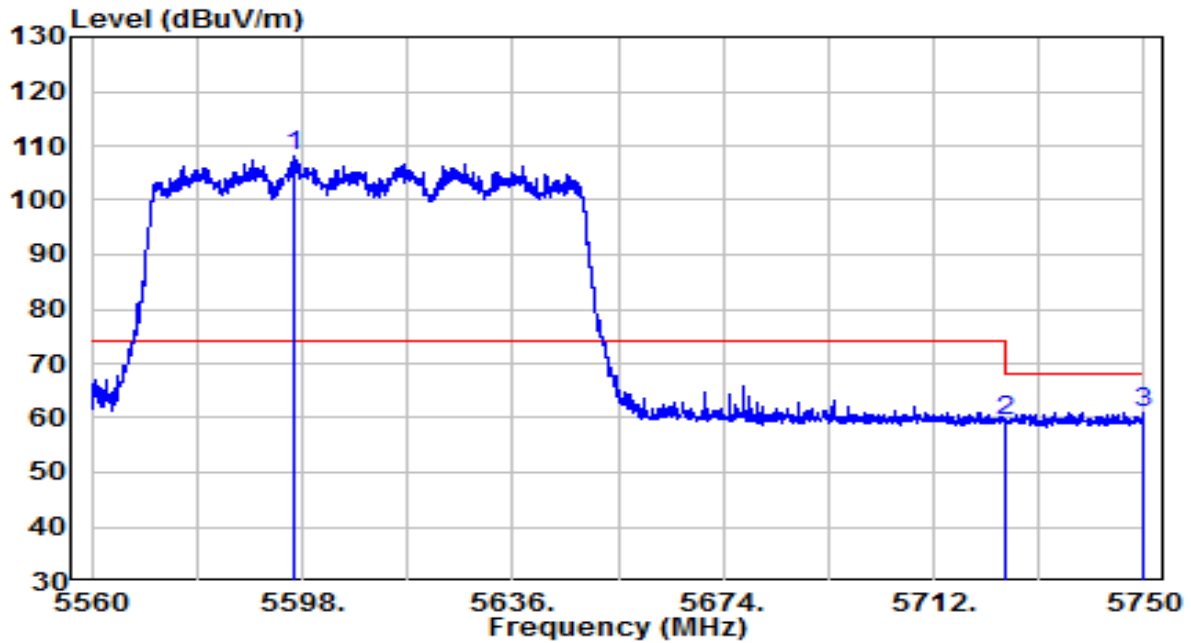


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5596.290	87.65	20.58	108.24	N/A	N/A	Peak
2	5725.000	38.45	21.00	59.44	-8.76	68.20	Peak
3	* 5749.905	40.02	21.08	61.10	-7.10	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5775MHz	Test Voltage	120V/60Hz

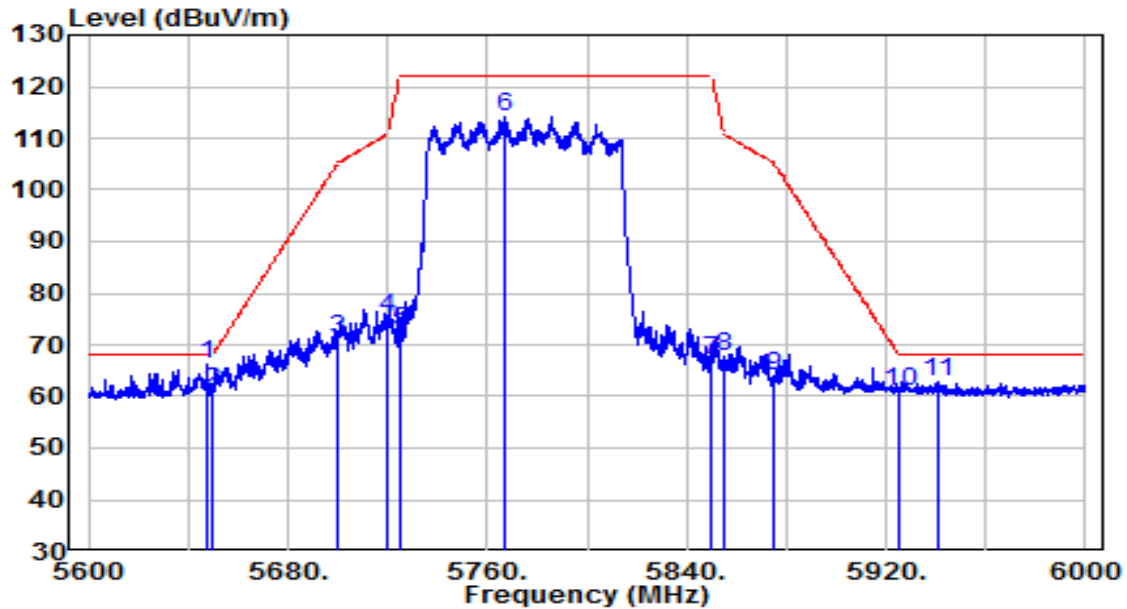


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5647.400	45.38	20.75	66.13	-2.07	68.20	Peak
2	5650.000	40.33	20.76	61.09	-7.11	68.20	Peak
3	5700.000	50.20	20.92	71.12	-34.08	105.20	Peak
4	5720.000	54.16	20.98	75.14	-35.66	110.80	Peak
5	5725.000	51.78	21.00	72.78	-49.42	122.20	Peak
6	5767.200	92.97	21.14	114.11	N/A	N/A	Peak
7	5850.000	45.74	21.40	67.15	-55.05	122.20	Peak
8	5855.000	46.36	21.42	67.78	-43.02	110.80	Peak
9	5875.000	42.41	21.49	63.90	-41.30	105.20	Peak
10	5925.000	39.35	21.65	61.00	-7.20	68.20	Peak
11	5940.600	41.11	21.70	62.81	-5.39	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-03-05
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit 802.11ax-HE80 at Channel 5775MHz	Test Voltage	120V/60Hz

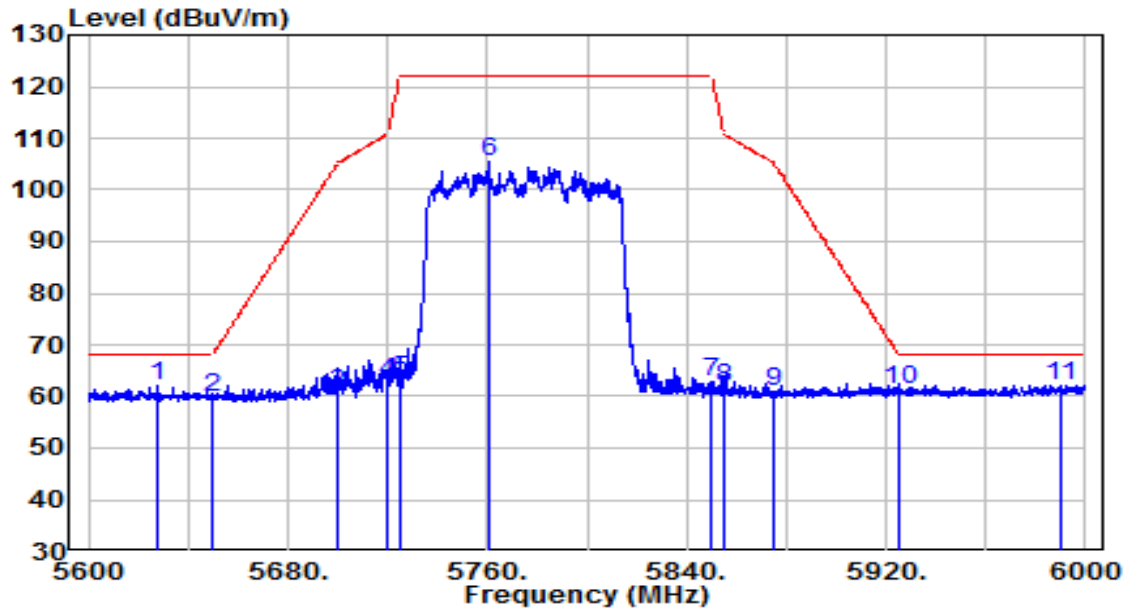


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5628.000	41.21	20.68	61.89	-6.31	68.20	Peak
2	5650.000	38.99	20.76	59.75	-8.45	68.20	Peak
3	5700.000	39.77	20.92	60.69	-44.51	105.20	Peak
4	5720.000	42.03	20.98	63.01	-47.79	110.80	Peak
5	5725.000	42.31	21.00	63.31	-58.89	122.20	Peak
6	5760.800	84.25	21.11	105.36	N/A	N/A	Peak
7	5850.000	41.47	21.40	62.88	-59.32	122.20	Peak
8	5855.000	40.36	21.42	61.78	-49.02	110.80	Peak
9	5875.000	39.40	21.49	60.88	-44.32	105.20	Peak
10	5925.000	39.65	21.65	61.29	-6.91	68.20	Peak
11	* 5989.800	40.39	21.86	62.25	-5.95	68.20	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Type B Filter Configuration

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	120V/60Hz

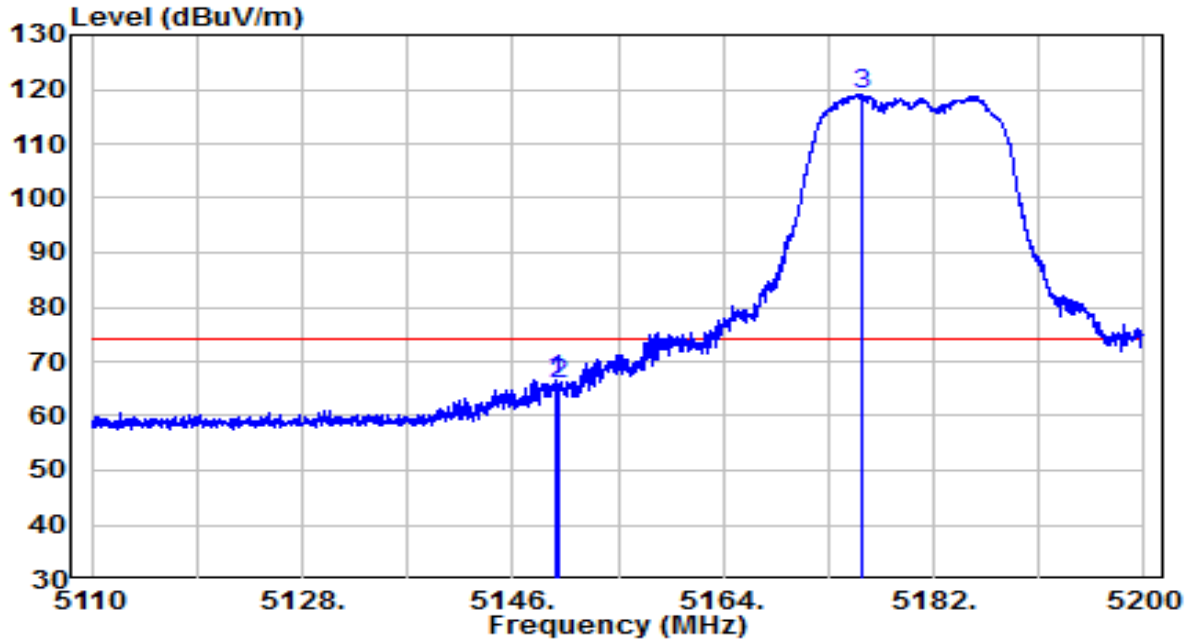


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	5149.645	46.87	19.91	66.77	-7.23	74.00	Peak
2		5150.000	46.05	19.91	65.96	-8.04	74.00	Peak
3		5175.835	99.10	19.93	119.03	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	120V/60Hz

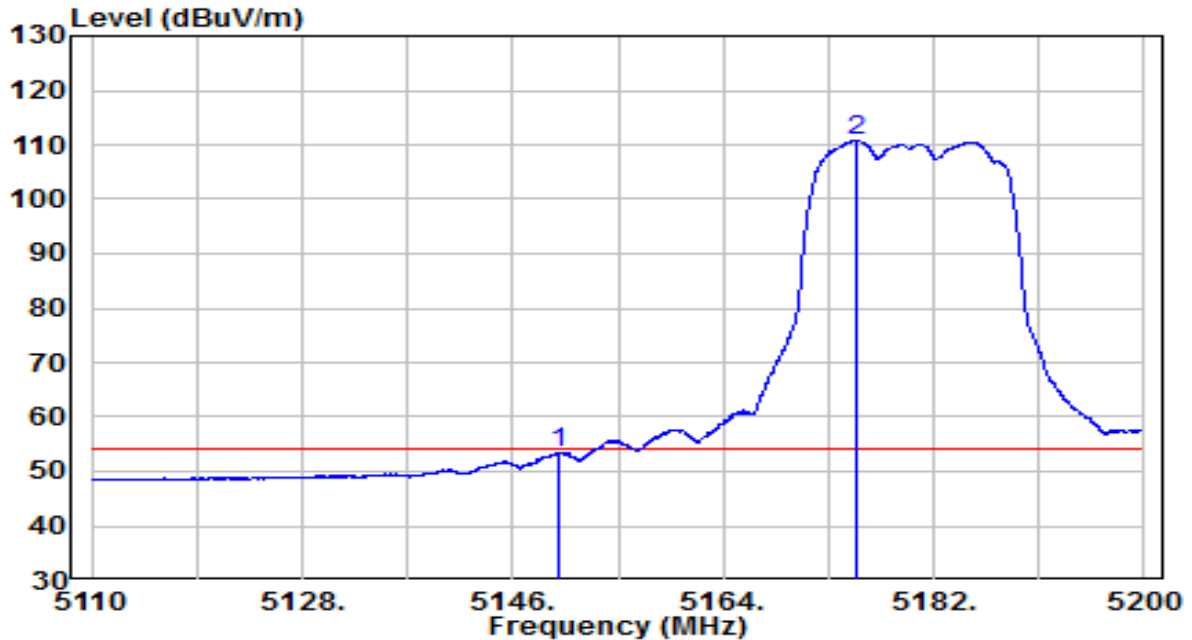


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	33.56	19.91	53.47	-0.53	54.00	Average
2		90.96	19.93	110.89	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	120V/60Hz

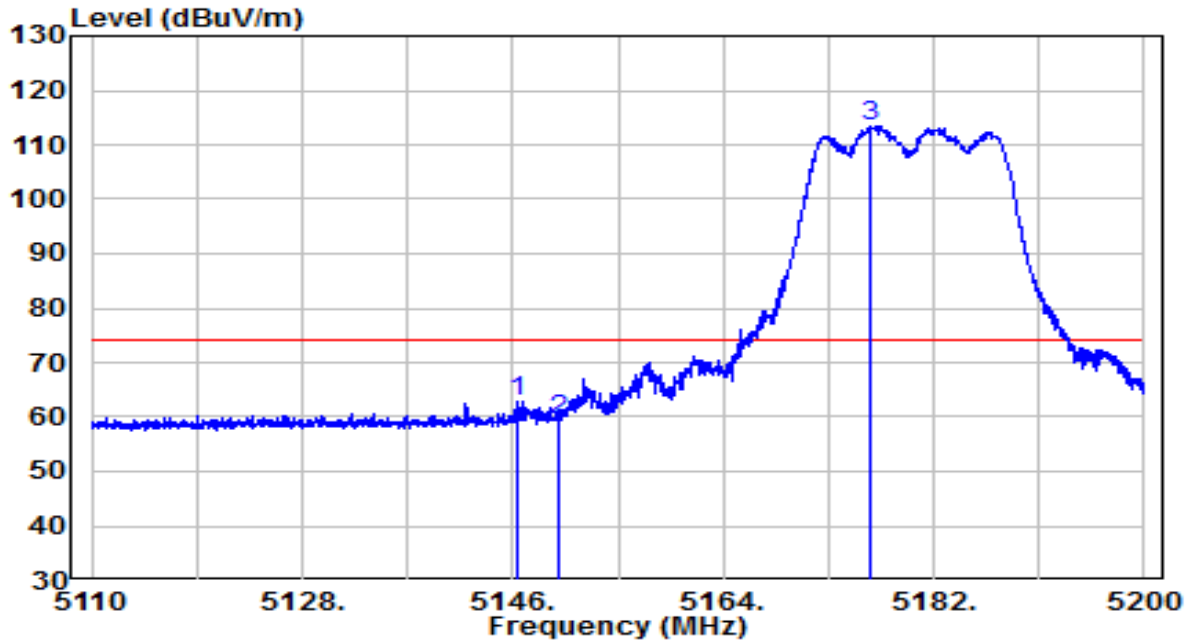


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5146.360	43.06	19.90	62.96	-11.04	74.00	Peak
2	5150.000	39.68	19.91	59.59	-14.41	74.00	Peak
3	5176.555	93.57	19.93	113.51	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	120V/60Hz

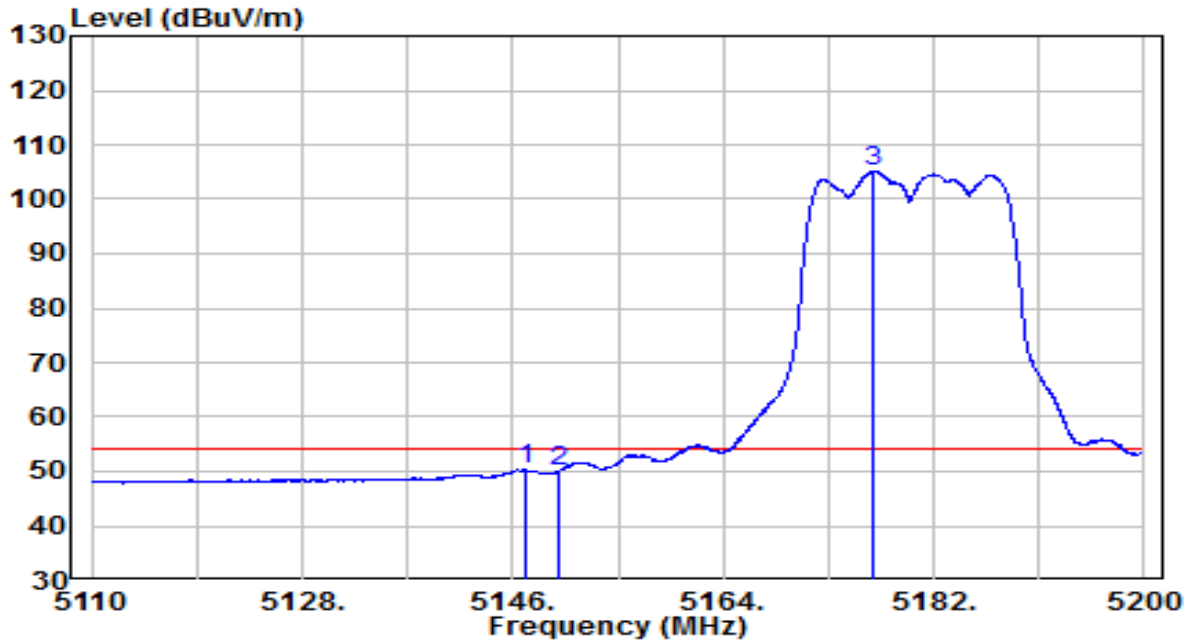


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5147.125	30.44	19.90	50.34	-3.66	54.00	Average
2	5150.000	30.13	19.91	50.04	-3.96	54.00	Average
3	5176.780	85.14	19.93	105.07	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	120V/60Hz

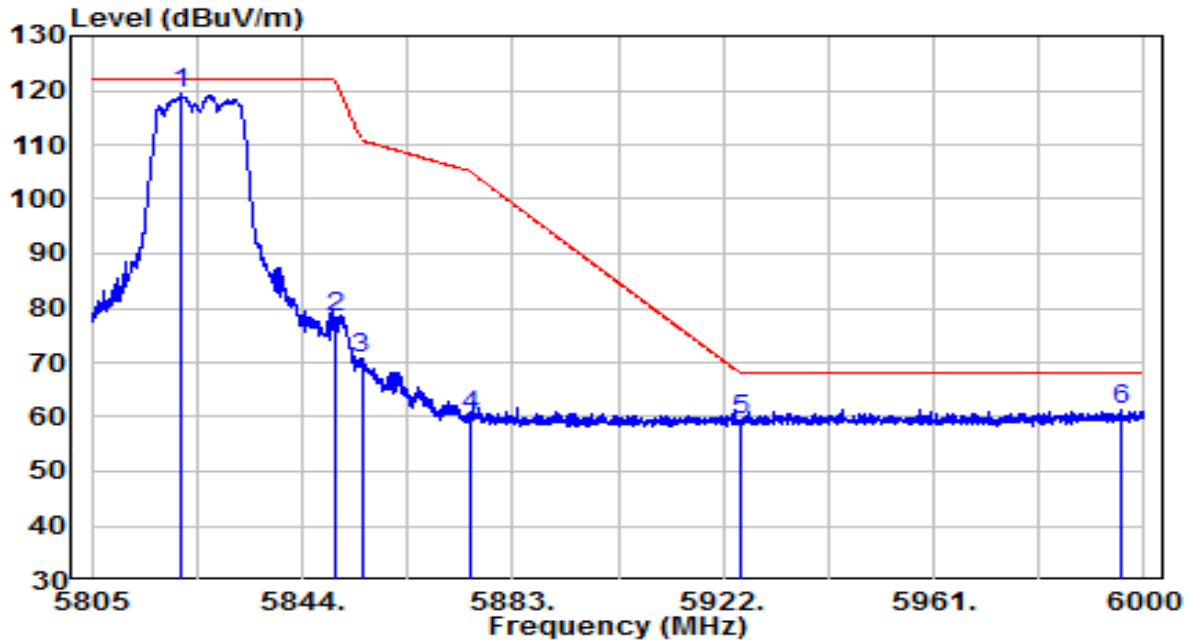


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5821.672	98.04	21.31	119.36	N/A	N/A	Peak
2	5850.000	57.06	21.40	78.46	-43.74	122.20	Peak
3	5855.000	49.18	21.42	70.60	-40.20	110.80	Peak
4	5875.000	38.71	21.49	60.20	-45.00	105.20	Peak
5	5925.000	37.81	21.65	59.46	-8.74	68.20	Peak
6	* 5995.515	39.54	21.88	61.41	-6.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	120V/60Hz

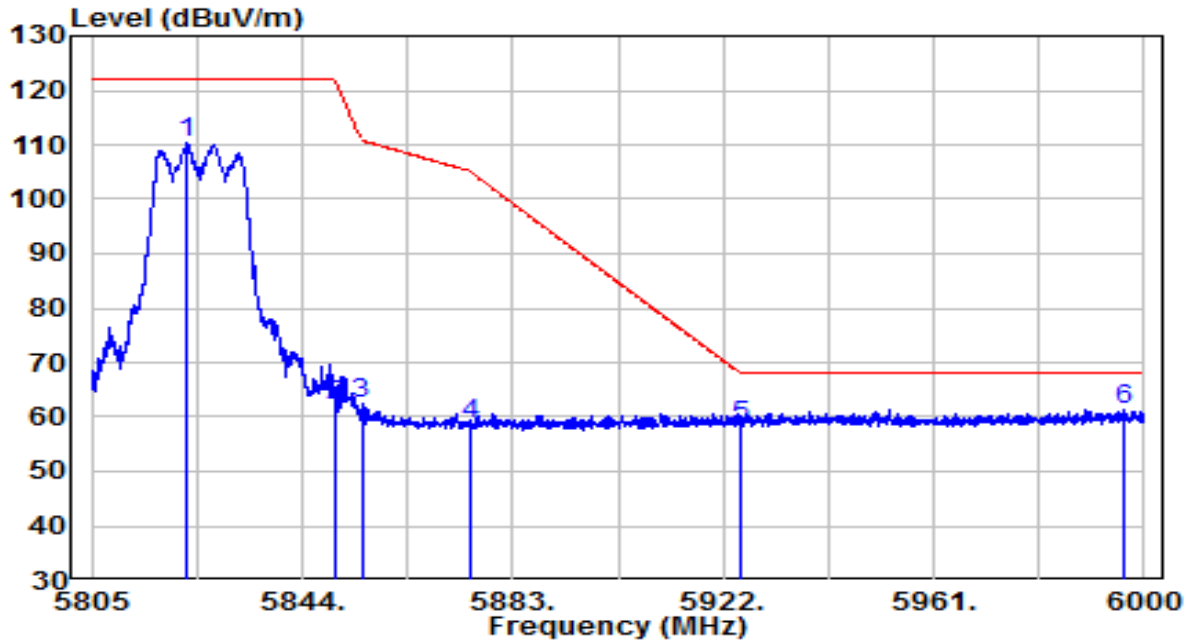


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5822.550	89.07	21.32	110.39	N/A	N/A	Peak
2	5850.000	40.84	21.40	62.24	-59.96	122.20	Peak
3	5855.000	40.93	21.42	62.35	-48.45	110.80	Peak
4	5875.000	37.37	21.49	58.85	-46.35	105.20	Peak
5	5925.000	36.62	21.65	58.27	-9.93	68.20	Peak
6	* 5996.393	39.42	21.88	61.30	-6.90	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	120V/60Hz

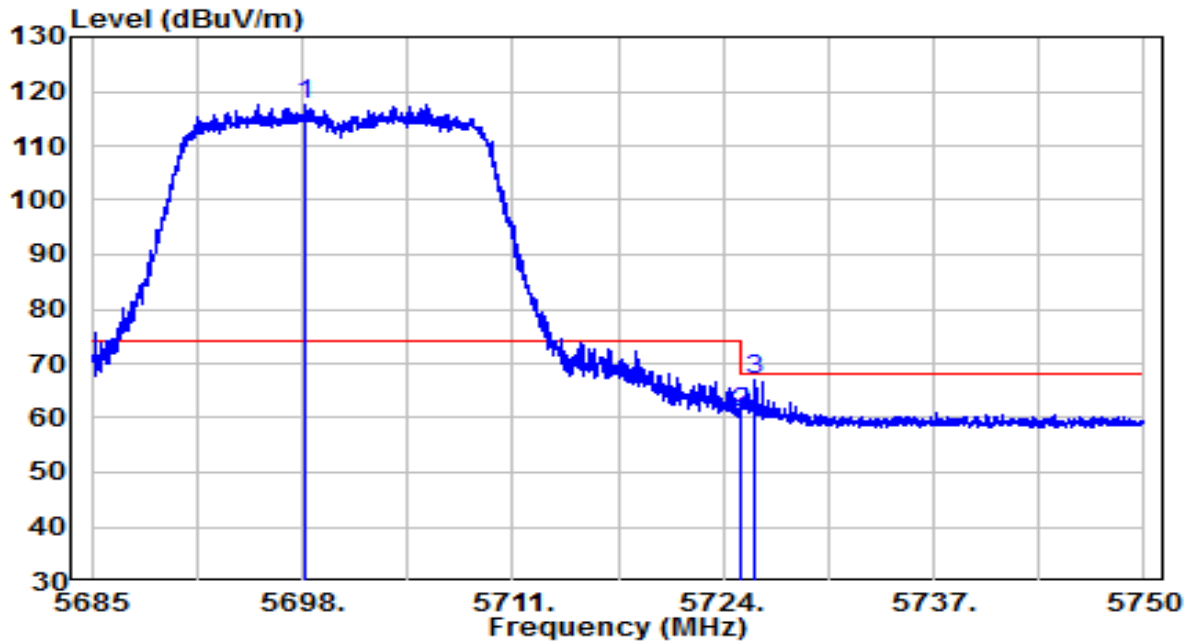


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5698.163	96.77	20.91	117.68	N/A	N/A	Peak
2	5725.000	39.81	21.00	60.81	-7.39	68.20	Peak
3	* 5725.982	46.10	21.00	67.10	-1.10	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	120V/60Hz

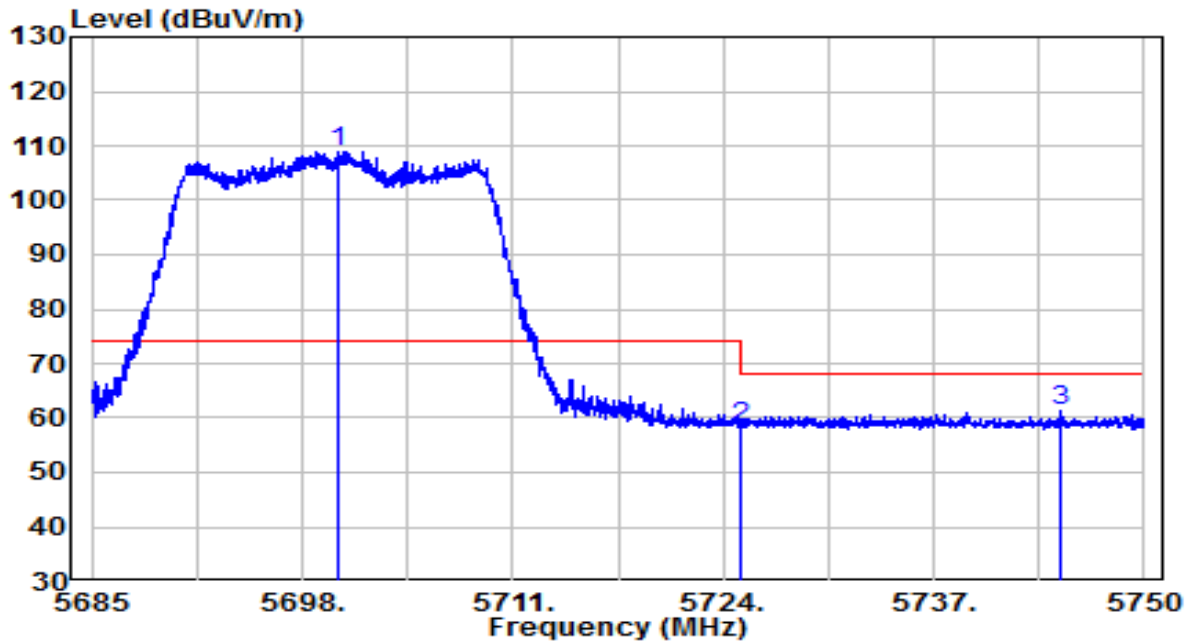


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5700.145	88.12	20.92	109.04	N/A	N/A	Peak
2	5725.000	37.37	21.00	58.37	-9.83	68.20	Peak
3	* 5744.897	40.14	21.06	61.20	-7.00	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120V/60Hz

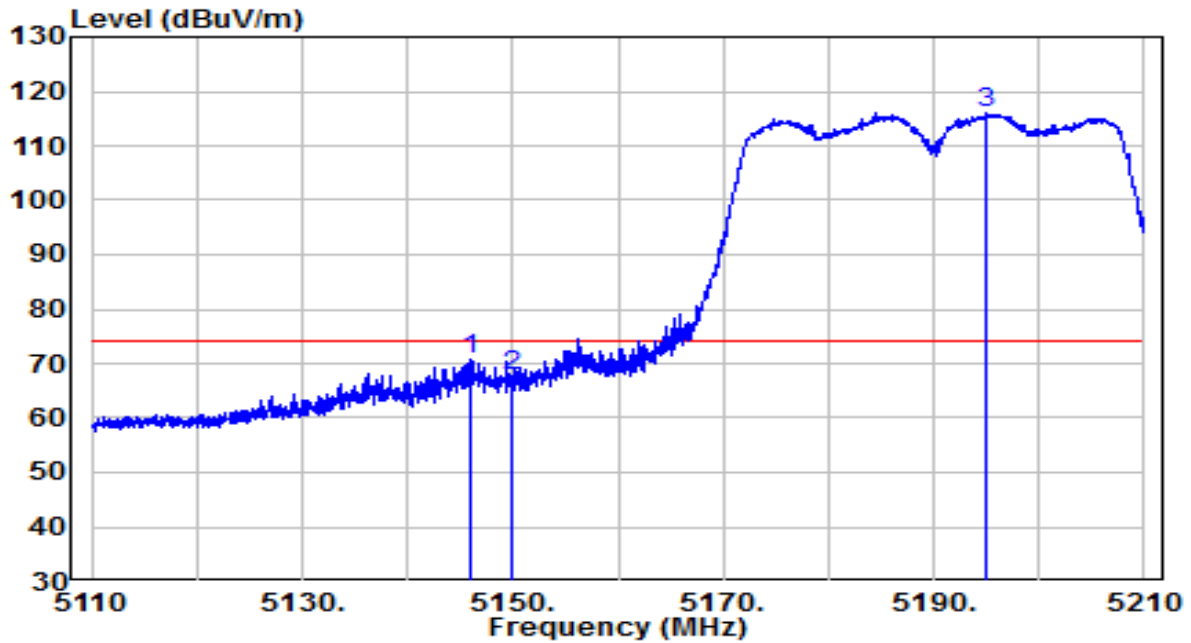


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5145.950	50.98	19.90	70.88	-3.12	74.00	Peak
2	5150.000	47.72	19.91	67.63	-6.37	74.00	Peak
3	5194.950	96.21	19.95	116.16	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120V/60Hz

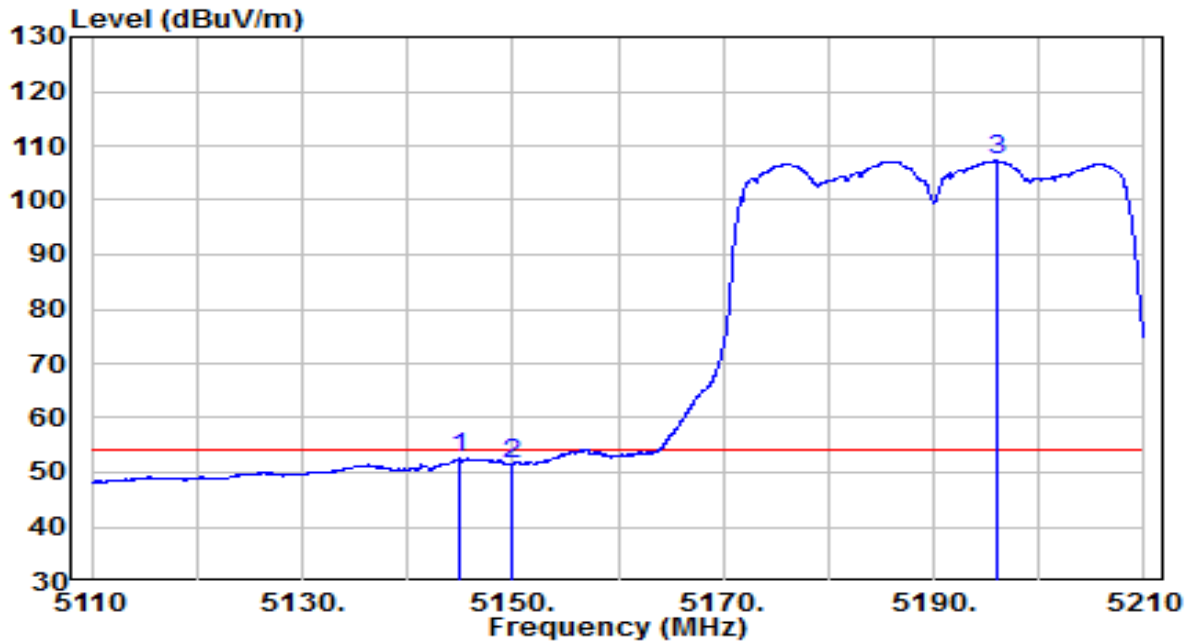


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5145.000	32.63	19.90	52.53	-1.47	54.00	Average
2	5150.000	31.68	19.91	51.59	-2.41	54.00	Average
3	5195.950	87.34	19.95	107.29	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120V/60Hz

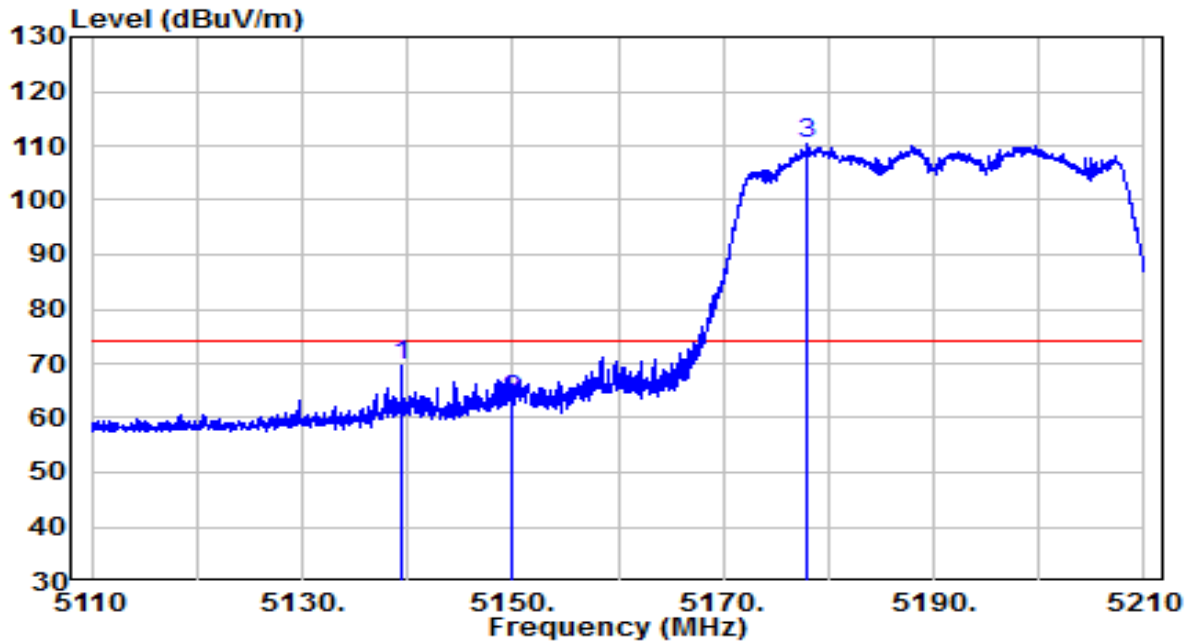


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	5139.500	49.61	19.90	69.51	-4.49	74.00	Peak
2		5150.000	43.39	19.91	63.30	-10.70	74.00	Peak
3		5177.950	90.42	19.94	110.35	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	120V/60Hz

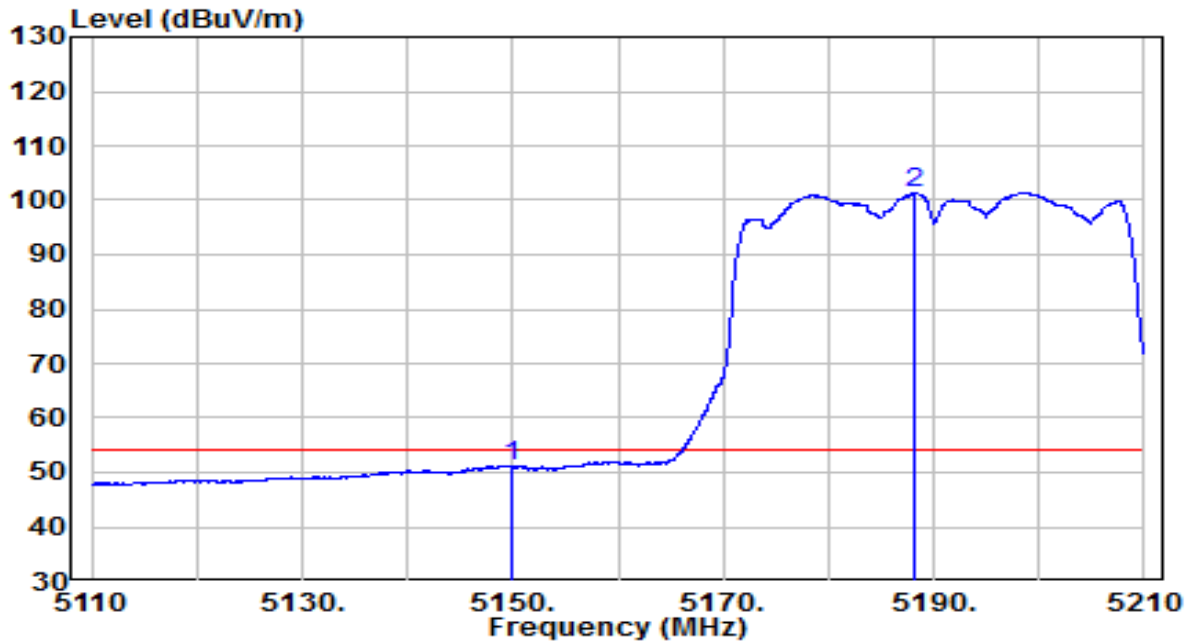


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5150.000	31.33	19.91	51.24	-2.76	54.00	Average
2	5188.050	81.37	19.95	101.31	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	120V/60Hz

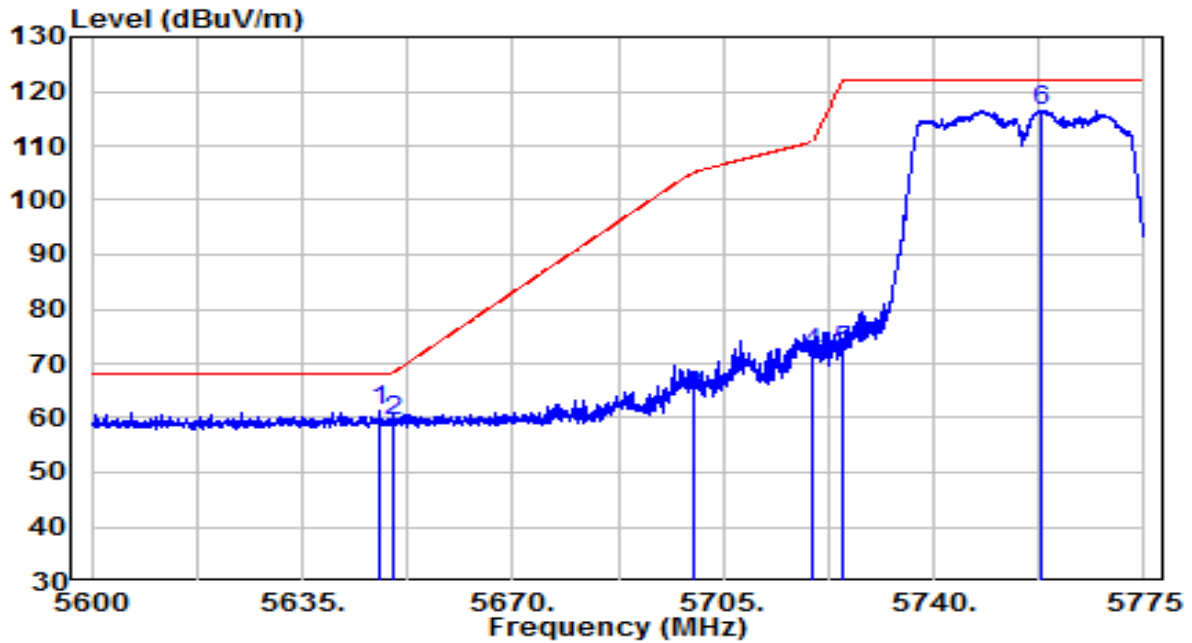


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5647.862	40.62	20.75	61.37	-6.83	68.20	Peak
2	5650.000	38.55	20.76	59.31	-8.89	68.20	Peak
3	5700.000	43.15	20.92	64.07	-41.13	105.20	Peak
4	5720.000	51.00	20.98	71.98	-38.82	110.80	Peak
5	5725.000	51.32	21.00	72.32	-49.88	122.20	Peak
6	5757.763	95.30	21.11	116.40	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	120V/60Hz

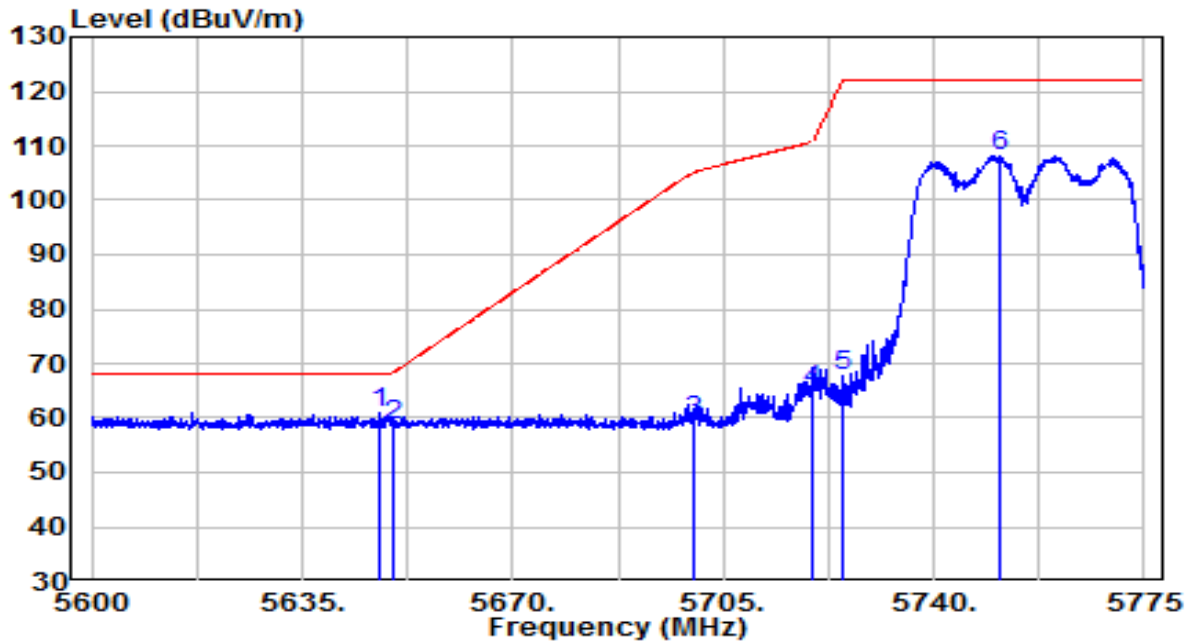


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5647.775	40.21	20.75	60.96	-7.24	68.20	Peak
2	5650.000	37.89	20.76	58.65	-9.55	68.20	Peak
3	5700.000	38.49	20.92	59.41	-45.79	105.20	Peak
4	5720.000	44.28	20.98	65.26	-45.54	110.80	Peak
5	5725.000	46.79	21.00	67.79	-54.41	122.20	Peak
6	5751.200	87.19	21.08	108.28	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	120V/60Hz

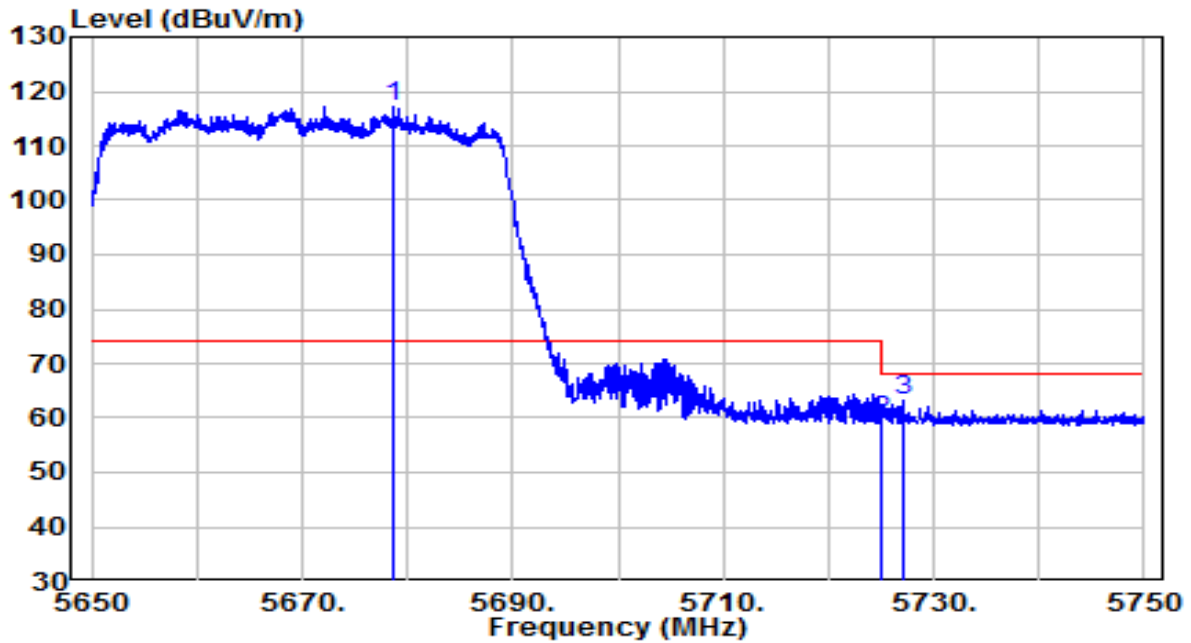


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5678.600	96.43	20.85	117.28	N/A	N/A	Peak
2	5725.000	38.48	21.00	59.47	-8.73	68.20	Peak
3	* 5727.100	42.13	21.01	63.14	-5.06	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)- Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	120V/60Hz

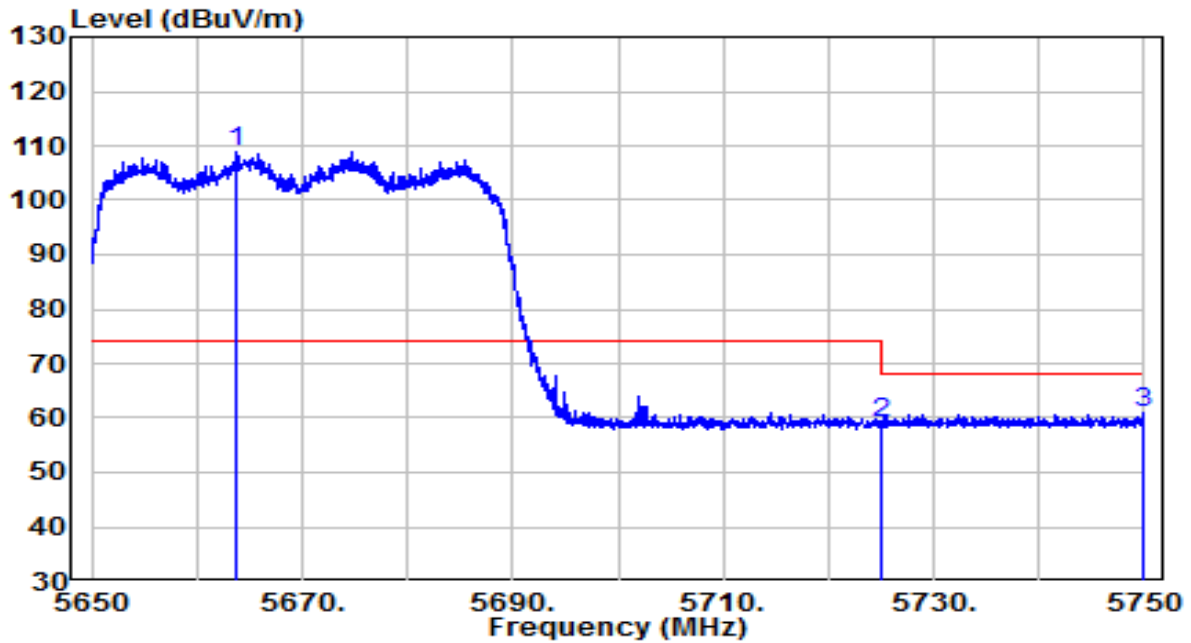


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5663.750	87.96	20.80	108.76	N/A	N/A	Peak
2	5725.000	37.88	21.00	58.87	-9.33	68.20	Peak
3	* 5749.950	39.71	21.08	60.79	-7.41	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

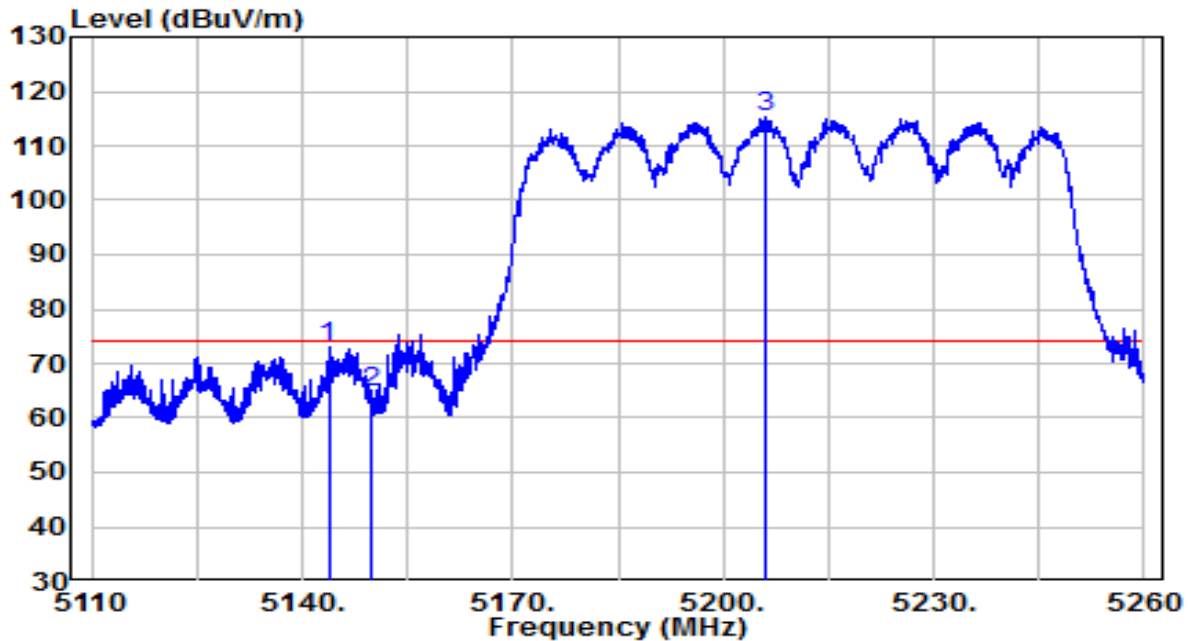


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	5143.750	53.25	19.90	73.15	-0.85	74.00	Peak
2		5150.000	44.83	19.91	64.73	-9.27	74.00	Peak
3		5205.850	95.13	19.96	115.10	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

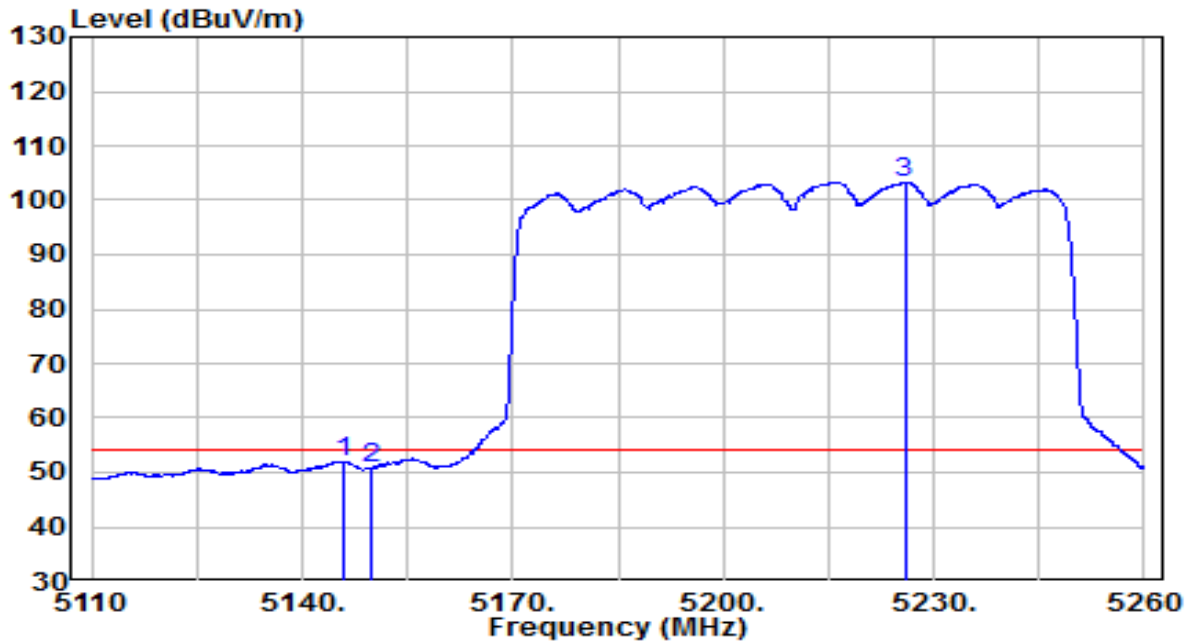


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	5145.850	32.15	19.90	52.06	-1.94	54.00	Average
2		5150.000	30.93	19.91	50.84	-3.16	54.00	Average
3		5225.875	83.35	19.98	103.33	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

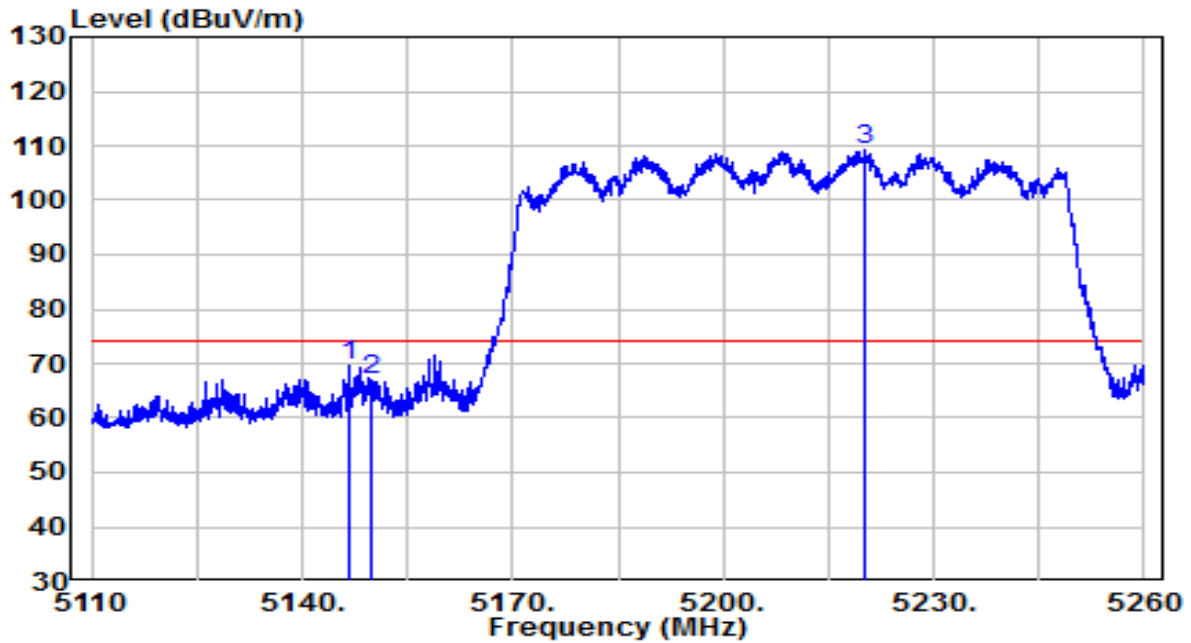


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)	
1	*	5146.750	49.85	19.90	69.76	-4.24	74.00	Peak
2		5150.000	46.98	19.91	66.88	-7.12	74.00	Peak
3		5220.250	89.13	19.98	109.11	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5210MHz	Test Voltage	120V/60Hz

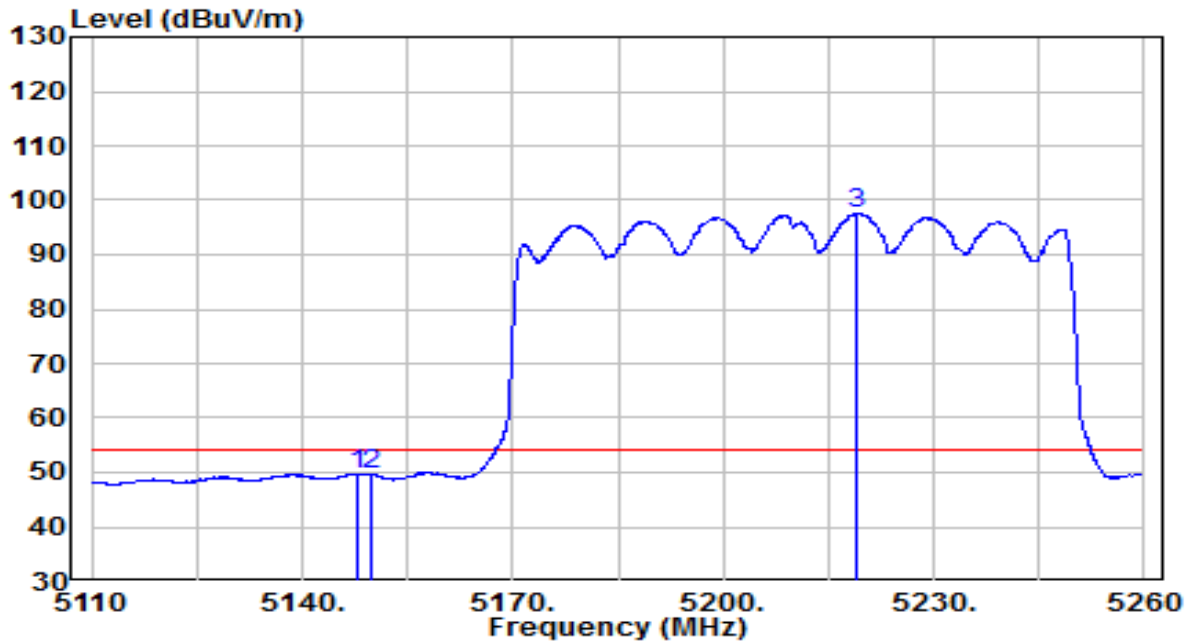


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	29.85	19.90	49.76	-4.24	54.00	Average
2		29.65	19.91	49.56	-4.44	54.00	Average
3		77.59	19.98	97.57	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	120V/60Hz

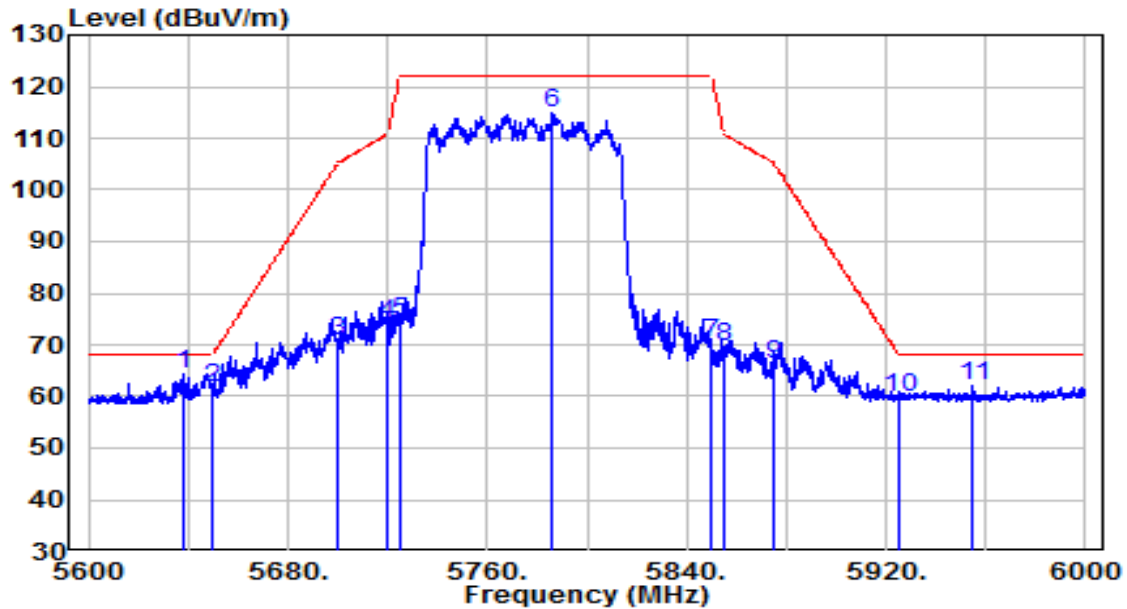


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	* 5637.800	43.46	20.72	64.18	-4.02	68.20	Peak
2	5650.000	40.78	20.76	61.54	-6.66	68.20	Peak
3	5700.000	49.94	20.92	70.86	-34.34	105.20	Peak
4	5720.000	53.05	20.98	74.03	-36.77	110.80	Peak
5	5725.000	53.54	21.00	74.53	-47.67	122.20	Peak
6	5786.000	93.79	21.20	114.99	N/A	N/A	Peak
7	5850.000	49.10	21.40	70.51	-51.69	122.20	Peak
8	5855.000	48.05	21.42	69.47	-41.33	110.80	Peak
9	5875.000	44.91	21.49	66.39	-38.81	105.20	Peak
10	5925.000	38.32	21.65	59.97	-8.23	68.20	Peak
11	5955.000	40.17	21.74	61.92	-6.28	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	ACCESS POINT	Date of Test	2021-05-06
Factor	BBHA 9120D	Temp. / Humidity	22°C/34%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ax-HE80 at Channel 5775MHz	Test Voltage	120V/60Hz

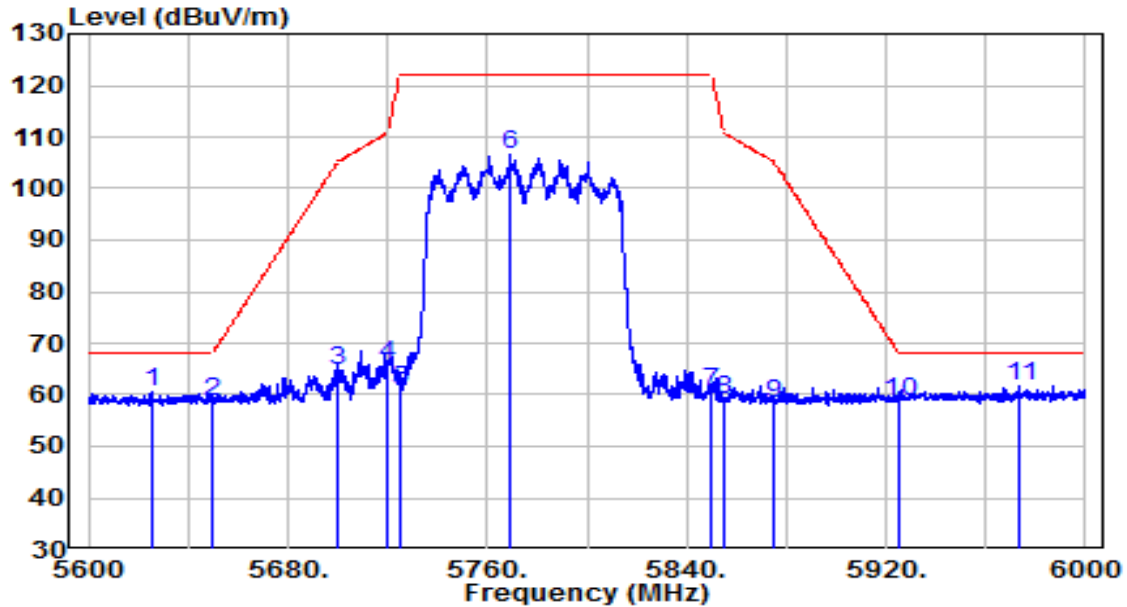

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	5625.200	39.93	20.68	60.60	-7.60	68.20	Peak
2	5650.000	37.91	20.76	58.67	-9.53	68.20	Peak
3	5700.000	43.71	20.92	64.63	-40.57	105.20	Peak
4	5720.000	44.81	20.98	65.79	-45.01	110.80	Peak
5	5725.000	39.87	21.00	60.87	-61.33	122.20	Peak
6	5769.200	85.38	21.14	106.53	N/A	N/A	Peak
7	5850.000	39.13	21.40	60.53	-61.67	122.20	Peak
8	5855.000	37.64	21.42	59.06	-51.74	110.80	Peak
9	5875.000	36.78	21.49	58.27	-46.93	105.20	Peak
10	5925.000	37.07	21.65	58.71	-9.49	68.20	Peak
11	* 5973.600	39.82	21.80	61.63	-6.57	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB)– Preamplifier(dB)+ 16dB Attenuation.
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. AC Conducted Emissions Measurement


7.9.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.9.2. Test Setup

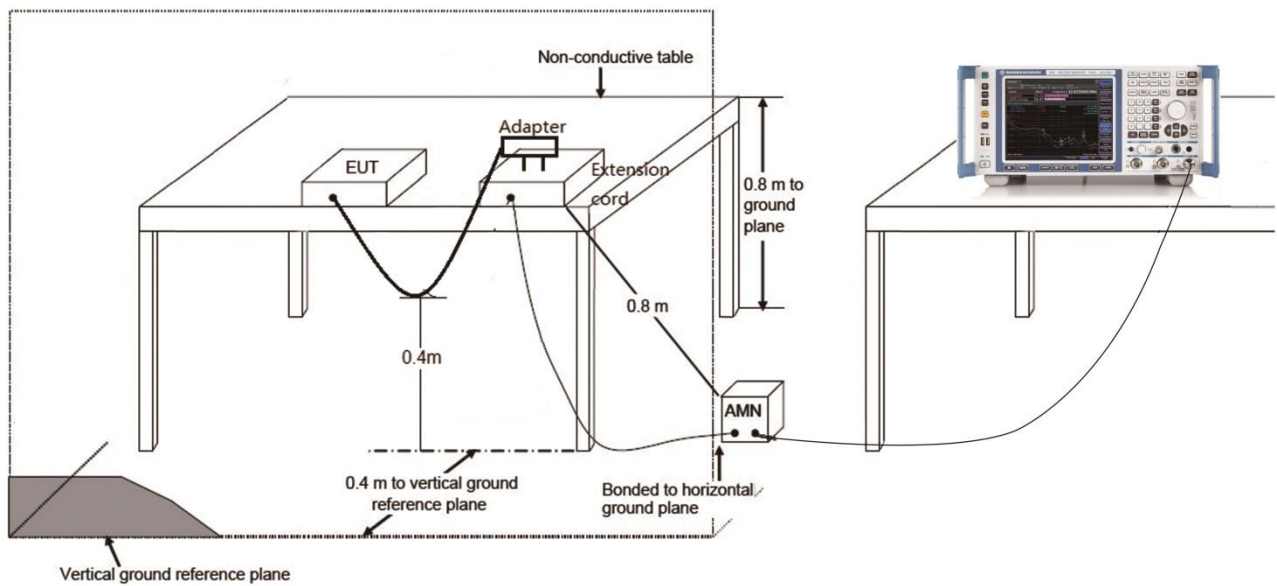

7.9.3.Test Result

EUT	ACCESS POINT	Date of Test	2021-04-27
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.6°C/60.9%
Polarity	Line1	Site / Test Engineer	SR2 / Eric Lin
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz	Test Voltage	120V/60Hz

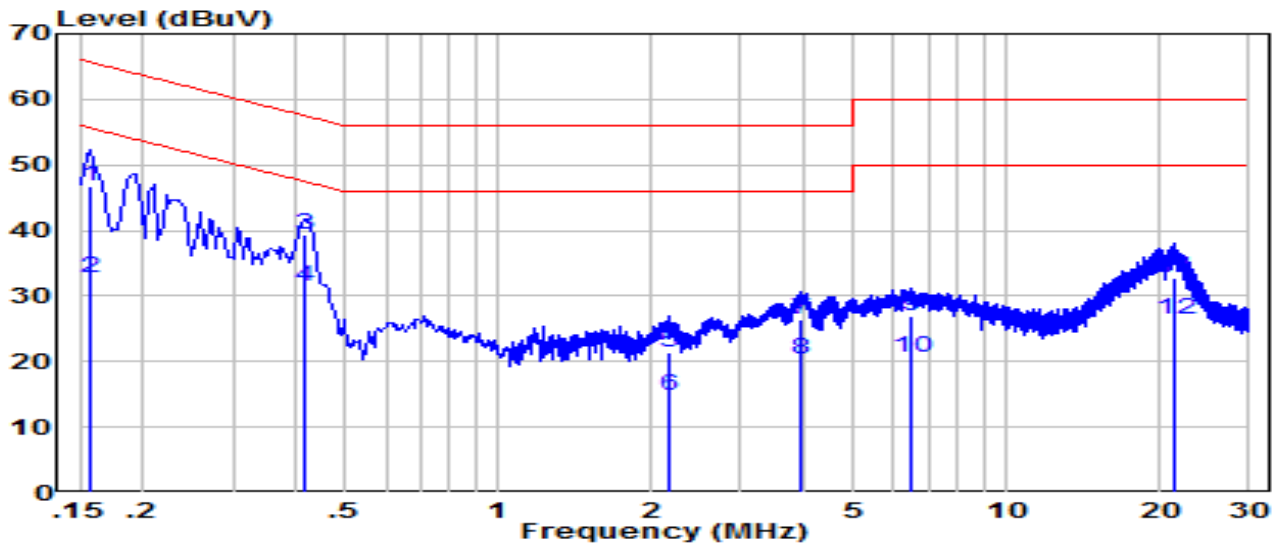


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	0.158	37.13	9.61	46.74	-18.83	65.57	QP
2	0.158	23.03	9.61	32.64	-22.93	55.57	Average
3	0.413	29.86	9.63	39.49	-18.10	57.59	QP
4	* 0.413	21.76	9.63	31.39	-16.20	47.59	Average
5	2.170	11.58	9.69	21.27	-34.73	56.00	QP
6	2.170	4.98	9.69	14.67	-31.33	46.00	Average
7	3.940	16.72	9.72	26.44	-29.56	56.00	QP
8	3.940	10.52	9.72	20.24	-25.76	46.00	Average
9	6.450	17.18	9.78	26.96	-33.04	60.00	QP
10	6.450	10.78	9.78	20.56	-29.44	50.00	Average
11	21.420	22.88	10.00	32.88	-27.12	60.00	QP
12	21.420	16.48	10.00	26.48	-23.52	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = ISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	ACCESS POINT	Date of Test	2021-04-27
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.6°C/60.9%
Polarity	Neutral	Site / Test Engineer	SR2 / Eric Lin
Test Mode	Transmit by 802.11ax-HE20 at channel 5180MHz	Test Voltage	120V/60Hz

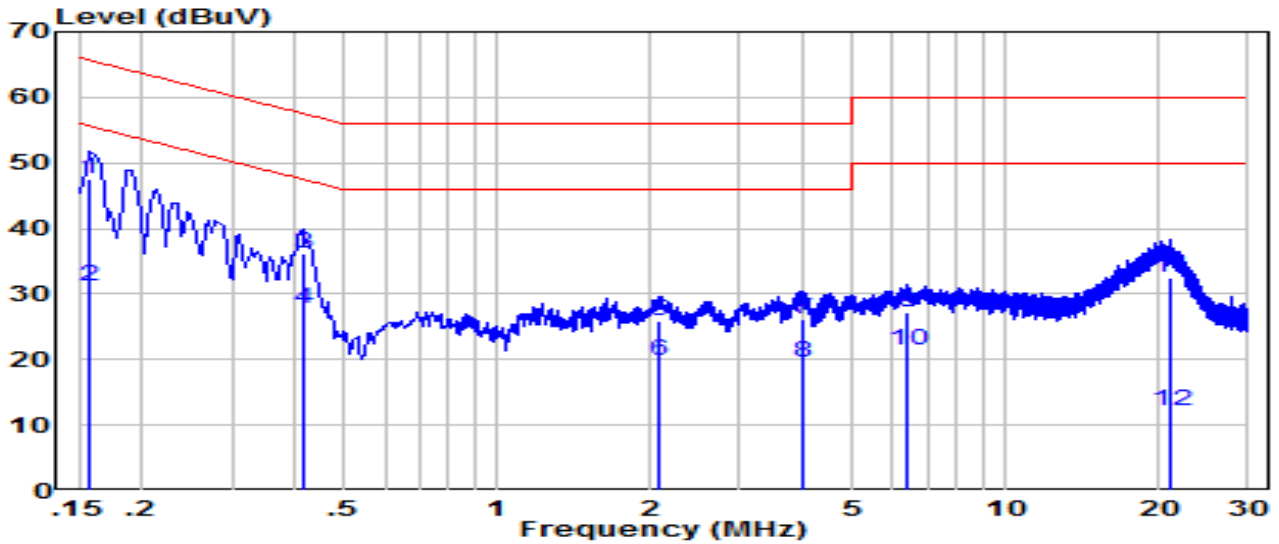

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	37.92	9.62	47.54	-18.03	65.57	QP
2		21.62	9.62	31.24	-24.33	55.57	Average
3		26.46	9.64	36.09	-21.48	57.57	QP
4		18.06	9.64	27.69	-19.88	47.57	Average
5		16.08	9.69	25.77	-30.23	56.00	QP
6		10.08	9.69	19.77	-26.23	46.00	Average
7		16.32	9.73	26.05	-29.95	56.00	QP
8		9.72	9.73	19.45	-26.55	46.00	Average
9		17.38	9.79	27.17	-32.83	60.00	QP
10		11.58	9.79	21.37	-28.63	50.00	Average
11		22.43	10.09	32.51	-27.49	60.00	QP
12		2.13	10.09	12.21	-37.79	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = ISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

————— The End —————

Appendix A - Test Setup Photograph

Refer to “2101TW0003-Test setup photo” file.

Appendix B - EUT Photograph

Refer to "2101TW0003-EUT photo" file.