

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ac-VHT40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8148.5	34.0	11.6	45.6	74.0	-28.4	Peak	Horizontal
*	9738.0	32.7	13.5	46.2	68.2	-22.0	Peak	Horizontal
	11004.5	33.6	16.5	50.1	74.0	-23.9	Peak	Horizontal
*	14379.0	32.9	20.1	53.0	68.2	-15.2	Peak	Horizontal
	9092.0	32.3	13.4	45.7	74.0	-28.3	Peak	Vertical
*	9721.0	33.6	13.5	47.1	68.2	-21.1	Peak	Vertical
	11735.5	30.9	17.7	48.6	74.0	-25.4	Peak	Vertical
*	14056.0	30.9	20.0	50.9	68.2	-17.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ac-VHT40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7443.0	31.8	12.1	43.9	74.0	-30.1	Peak	Horizontal
*	10001.5	31.4	13.8	45.2	68.2	-23.0	Peak	Horizontal
	11710.0	31.7	17.8	49.5	74.0	-24.5	Peak	Horizontal
*	14336.5	33.2	20.3	53.5	68.2	-14.7	Peak	Horizontal
	8267.5	31.9	11.2	43.1	74.0	-30.9	Peak	Vertical
*	9933.5	33.2	13.8	47.0	68.2	-21.2	Peak	Vertical
	11574.0	31.2	17.7	48.9	74.0	-25.1	Peak	Vertical
*	14379.0	33.0	20.1	53.1	68.2	-15.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ac-VHT40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8199.5	32.6	11.4	44.0	74.0	-30.0	Peak	Horizontal
*	9942.0	31.9	13.8	45.7	68.2	-22.5	Peak	Horizontal
	11548.5	32.5	17.7	50.2	74.0	-23.8	Peak	Horizontal
*	14430.0	32.0	20.1	52.1	68.2	-16.1	Peak	Horizontal
	8182.5	31.8	11.5	43.3	74.0	-30.7	Peak	Vertical
*	10520.0	33.3	15.4	48.7	68.2	-19.5	Peak	Vertical
	11319.0	31.8	17.4	49.2	74.0	-24.8	Peak	Vertical
*	14532.0	31.7	20.1	51.8	68.2	-16.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ac-VHT40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8420.5	33.0	11.4	44.4	74.0	-29.6	Peak	Horizontal
	11676.0	32.5	17.3	49.8	74.0	-24.2	Peak	Horizontal
*	13852.0	30.0	19.0	49.0	68.2	-19.2	Peak	Horizontal
*	14438.5	32.3	20.2	52.5	68.2	-15.7	Peak	Horizontal
	8242.0	31.5	11.0	42.5	74.0	-31.5	Peak	Vertical
*	10120.5	32.8	14.1	46.9	68.2	-21.3	Peak	Vertical
	11574.0	31.9	17.7	49.6	74.0	-24.4	Peak	Vertical
*	14336.5	32.4	20.3	52.7	68.2	-15.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ac-VHT40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8352.5	32.6	11.1	43.7	74.0	-30.3	Peak	Horizontal
*	10222.5	34.4	14.2	48.6	68.2	-19.6	Peak	Horizontal
	11727.0	31.9	17.9	49.8	74.0	-24.2	Peak	Horizontal
*	14447.0	32.1	20.4	52.5	68.2	-15.7	Peak	Horizontal
	8242.0	33.1	11.0	44.1	74.0	-29.9	Peak	Vertical
*	10018.5	32.6	13.8	46.4	68.2	-21.8	Peak	Vertical
	11565.5	31.2	17.8	49.0	74.0	-25.0	Peak	Vertical
*	14761.5	32.5	19.5	52.0	68.2	-16.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ac-VHT40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8182.5	32.7	11.5	44.2	74.0	-29.8	Peak	Horizontal
*	9993.0	30.7	13.7	44.4	68.2	-23.8	Peak	Horizontal
	11633.5	31.2	17.7	48.9	74.0	-25.1	Peak	Horizontal
*	14455.5	32.2	20.3	52.5	68.2	-15.7	Peak	Horizontal
	8199.5	33.3	11.4	44.7	74.0	-29.3	Peak	Vertical
*	9865.5	33.7	13.5	47.2	68.2	-21.0	Peak	Vertical
	11310.5	31.9	17.3	49.2	74.0	-24.8	Peak	Vertical
*	14251.5	31.8	19.9	51.7	68.2	-16.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ac-VHT40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8276.0	32.2	11.2	43.4	74.0	-30.6	Peak	Horizontal
*	9865.5	33.5	13.5	47.0	68.2	-21.2	Peak	Horizontal
	11557.0	31.6	17.9	49.5	74.0	-24.5	Peak	Horizontal
*	14353.5	31.8	20.3	52.1	68.2	-16.1	Peak	Horizontal
	8259.0	31.7	11.1	42.8	74.0	-31.2	Peak	Vertical
*	9874.0	32.7	13.6	46.3	68.2	-21.9	Peak	Vertical
	11540.0	31.8	17.6	49.4	74.0	-24.6	Peak	Vertical
*	14430.0	32.1	20.1	52.2	68.2	-16.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ac-VHT40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	8658.5	31.9	12.5	44.4	68.2	-23.8	Peak	Horizontal
*	10137.5	32.7	14.1	46.8	68.2	-21.4	Peak	Horizontal
	11548.5	31.8	17.7	49.5	74.0	-24.5	Peak	Horizontal
	13325.0	29.4	18.4	47.8	74.0	-26.2	Peak	Horizontal
	8344.0	33.5	11.1	44.6	74.0	-29.4	Peak	Vertical
*	10197.0	32.4	14.4	46.8	68.2	-21.4	Peak	Vertical
	11557.0	31.0	17.9	48.9	74.0	-25.1	Peak	Vertical
*	14353.5	32.0	20.3	52.3	68.2	-15.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ac-VHT80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8369.5	32.0	11.1	43.1	74.0	-30.9	Peak	Horizontal
*	10035.5	32.7	13.9	46.6	68.2	-21.6	Peak	Horizontal
	11548.5	30.9	17.7	48.6	74.0	-25.4	Peak	Horizontal
*	14464.0	32.1	20.2	52.3	68.2	-15.9	Peak	Horizontal
	8335.5	32.4	11.0	43.4	74.0	-30.6	Peak	Vertical
*	9874.0	33.1	13.6	46.7	68.2	-21.5	Peak	Vertical
	11548.5	31.3	17.7	49.0	74.0	-25.0	Peak	Vertical
*	14200.5	32.1	19.9	52.0	68.2	-16.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ac-VHT80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7460.0	32.7	12.2	44.9	74.0	-29.1	Peak	Horizontal
*	9806.0	33.2	13.8	47.0	68.2	-21.2	Peak	Horizontal
	10996.0	33.0	16.5	49.5	74.0	-24.5	Peak	Horizontal
*	14591.5	32.1	19.5	51.6	68.2	-16.6	Peak	Horizontal
	8182.5	32.2	11.5	43.7	74.0	-30.3	Peak	Vertical
*	9925.0	33.0	13.7	46.7	68.2	-21.5	Peak	Vertical
	11633.5	31.5	17.7	49.2	74.0	-24.8	Peak	Vertical
*	14914.5	32.7	19.5	52.2	68.2	-16.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ac-VHT80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8344.0	32.5	11.1	43.6	74.0	-30.4	Peak	Horizontal
*	10129.0	33.0	14.2	47.2	68.2	-21.0	Peak	Horizontal
	11472.0	31.7	17.5	49.2	74.0	-24.8	Peak	Horizontal
*	14438.5	31.6	20.2	51.8	68.2	-16.4	Peak	Horizontal
	8267.5	33.3	11.2	44.5	74.0	-29.5	Peak	Vertical
*	9874.0	33.3	13.6	46.9	68.2	-21.3	Peak	Vertical
	11489.0	30.9	17.7	48.6	74.0	-25.4	Peak	Vertical
*	14438.5	31.7	20.2	51.9	68.2	-16.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ac-VHT80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8182.5	33.2	11.5	44.7	74.0	-29.3	Peak	Horizontal
*	10188.5	33.4	14.3	47.7	68.2	-20.5	Peak	Horizontal
	11897.0	32.6	17.4	50.0	74.0	-24.0	Peak	Horizontal
*	14430.0	32.6	20.1	52.7	68.2	-15.5	Peak	Horizontal
	7562.0	32.2	11.9	44.1	74.0	-29.9	Peak	Vertical
*	9925.0	32.9	13.7	46.6	68.2	-21.6	Peak	Vertical
	11540.0	31.7	17.6	49.3	74.0	-24.7	Peak	Vertical
*	14430.0	32.9	20.1	53.0	68.2	-15.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ac-VHT80 – Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	9483.0	30.9	13.4	44.3	74.0	-29.7	Peak	Horizontal
*	9899.5	31.5	13.6	45.1	68.2	-23.1	Peak	Horizontal
	11489.0	32.9	17.7	50.6	74.0	-23.4	Peak	Horizontal
*	14455.5	32.1	20.3	52.4	68.2	-15.8	Peak	Horizontal
	8097.5	31.6	12.0	43.6	74.0	-30.4	Peak	Vertical
*	10103.5	33.1	13.9	47.0	68.2	-21.2	Peak	Vertical
	11897.0	31.7	17.4	49.1	74.0	-24.9	Peak	Vertical
*	14421.5	32.1	19.9	52.0	68.2	-16.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ac-VHT80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8378.0	32.6	11.1	43.7	74.0	-30.3	Peak	Horizontal
*	10112.0	32.8	14.0	46.8	68.2	-21.4	Peak	Horizontal
	11319.0	31.3	17.4	48.7	74.0	-25.3	Peak	Horizontal
*	14336.5	31.8	20.3	52.1	68.2	-16.1	Peak	Horizontal
*	9797.5	33.0	13.7	46.7	68.2	-21.5	Peak	Vertical
	11557.0	32.5	17.9	50.4	74.0	-23.6	Peak	Vertical
	13359.0	30.2	18.4	48.6	74.0	-25.4	Peak	Vertical
*	14455.5	32.5	20.3	52.8	68.2	-15.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ac-VHT160 – Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8310.0	32.1	10.9	43.0	74.0	-31.0	Peak	Horizontal
*	9848.5	33.3	13.5	46.8	68.2	-21.4	Peak	Horizontal
	11574.0	32.0	17.7	49.7	74.0	-24.3	Peak	Horizontal
*	14328.0	31.5	20.2	51.7	68.2	-16.5	Peak	Horizontal
	9151.5	29.7	13.6	43.3	74.0	-30.7	Peak	Vertical
*	10265.0	31.2	14.6	45.8	68.2	-22.4	Peak	Vertical
	11803.5	31.6	17.7	49.3	74.0	-24.7	Peak	Vertical
	13333.5	31.6	18.2	49.8	74.0	-24.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ac-VHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8199.5	33.1	11.4	44.5	74.0	-29.5	Peak	Horizontal
*	8726.5	32.2	12.5	44.7	68.2	-23.5	Peak	Horizontal
*	10205.5	33.0	14.3	47.3	68.2	-20.9	Peak	Horizontal
	11489.0	32.1	17.7	49.8	74.0	-24.2	Peak	Horizontal
*	8769.0	30.5	12.8	43.3	68.2	-24.9	Peak	Vertical
	9389.5	30.0	13.7	43.7	74.0	-30.3	Peak	Vertical
*	10205.5	32.9	14.3	47.2	68.2	-21.0	Peak	Vertical
	11557.0	31.5	17.9	49.4	74.0	-24.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE20 – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8310.0	31.3	10.9	42.2	74.0	-31.8	Peak	Horizontal
*	8794.5	30.6	12.6	43.2	68.2	-25.0	Peak	Horizontal
*	9942.0	33.1	13.8	46.9	68.2	-21.3	Peak	Horizontal
	11650.5	31.8	17.8	49.6	74.0	-24.4	Peak	Horizontal
	8420.5	33.6	11.4	45.0	74.0	-29.0	Peak	Vertical
*	8845.5	32.3	12.8	45.1	68.2	-23.1	Peak	Vertical
*	10188.5	33.3	14.3	47.6	68.2	-20.6	Peak	Vertical
	11710.0	32.3	17.8	50.1	74.0	-23.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE20 – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8344.0	32.7	11.1	43.8	74.0	-30.2	Peak	Horizontal
*	8701.0	31.3	12.5	43.8	68.2	-24.4	Peak	Horizontal
*	10035.5	33.3	13.9	47.2	68.2	-21.0	Peak	Horizontal
	11463.5	31.9	17.5	49.4	74.0	-24.6	Peak	Horizontal
	8403.5	33.3	11.5	44.8	74.0	-29.2	Peak	Vertical
*	8684.0	32.5	12.5	45.0	68.2	-23.2	Peak	Vertical
*	9976.0	33.5	13.8	47.3	68.2	-20.9	Peak	Vertical
	11319.0	31.6	17.4	49.0	74.0	-25.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE20 – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	7910.5	31.9	11.4	43.3	68.2	-24.9	Peak	Horizontal
	8352.5	32.6	11.1	43.7	74.0	-30.3	Peak	Horizontal
*	9738.0	33.2	13.5	46.7	68.2	-21.5	Peak	Horizontal
	11489.0	32.5	17.7	50.2	74.0	-23.8	Peak	Horizontal
	8276.0	32.0	11.2	43.2	74.0	-30.8	Peak	Vertical
*	8769.0	31.4	12.8	44.2	68.2	-24.0	Peak	Vertical
*	10137.5	33.3	14.1	47.4	68.2	-20.8	Peak	Vertical
	11378.5	30.3	17.3	47.6	74.0	-26.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8412.0	33.5	11.4	44.9	74.0	-29.1	Peak	Horizontal
*	8616.0	32.2	12.3	44.5	68.2	-23.7	Peak	Horizontal
*	10129.0	32.9	14.2	47.1	68.2	-21.1	Peak	Horizontal
	11650.5	31.1	17.8	48.9	74.0	-25.1	Peak	Horizontal
	8471.5	32.9	11.7	44.6	74.0	-29.4	Peak	Vertical
*	8786.0	30.9	12.7	43.6	68.2	-24.6	Peak	Vertical
*	9959.0	33.3	13.9	47.2	68.2	-21.0	Peak	Vertical
	11565.5	31.4	17.8	49.2	74.0	-24.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8259.0	32.7	11.1	43.8	74.0	-30.2	Peak	Horizontal
*	8811.5	30.8	12.7	43.5	68.2	-24.7	Peak	Horizontal
*	9959.0	33.6	13.9	47.5	68.2	-20.7	Peak	Horizontal
	11489.0	31.9	17.7	49.6	74.0	-24.4	Peak	Horizontal
	8276.0	31.6	11.2	42.8	74.0	-31.2	Peak	Vertical
*	8692.5	31.6	12.6	44.2	68.2	-24.0	Peak	Vertical
*	10154.5	32.9	14.0	46.9	68.2	-21.3	Peak	Vertical
	11727.0	31.8	17.9	49.7	74.0	-24.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	8250.5	31.6	11.0	42.6	74.0	-31.4	Peak	Horizontal
*	8735.0	31.5	12.5	44.0	68.2	-24.2	Peak	Horizontal
*	10146.0	32.8	13.9	46.7	68.2	-21.5	Peak	Horizontal
	11319.0	31.6	17.4	49.0	74.0	-25.0	Peak	Horizontal
	8157.0	33.9	11.5	45.4	74.0	-28.6	Peak	Vertical
*	8760.5	32.2	12.7	44.9	68.2	-23.3	Peak	Vertical
*	10197.0	32.4	14.4	46.8	68.2	-21.4	Peak	Vertical
	11565.5	31.0	17.8	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8250.5	31.8	11.0	42.8	74.0	-31.2	Peak	Horizontal
*	8828.5	30.9	12.7	43.6	68.2	-24.6	Peak	Horizontal
*	10171.5	32.9	14.1	47.0	68.2	-21.2	Peak	Horizontal
	11064.0	32.8	16.3	49.1	74.0	-24.9	Peak	Horizontal
	8148.5	32.0	11.6	43.6	74.0	-30.4	Peak	Vertical
*	8692.5	30.7	12.6	43.3	68.2	-24.9	Peak	Vertical
*	9797.5	33.5	13.7	47.2	68.2	-21.0	Peak	Vertical
	12177.5	31.1	17.7	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	8182.5	32.9	11.5	44.4	74.0	-29.6	Peak	Horizontal
*	8667.0	31.8	12.5	44.3	68.2	-23.9	Peak	Horizontal
*	9899.5	34.1	13.6	47.7	68.2	-20.5	Peak	Horizontal
	11642.0	31.8	17.9	49.7	74.0	-24.3	Peak	Horizontal
	8165.5	32.8	11.5	44.3	74.0	-29.7	Peak	Vertical
*	8735.0	30.9	12.5	43.4	68.2	-24.8	Peak	Vertical
*	9797.5	34.4	13.7	48.1	68.2	-20.1	Peak	Vertical
	11506.0	32.4	17.4	49.8	74.0	-24.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	8148.5	33.1	11.6	44.7	74.0	-29.3	Peak	Horizontal
*	8692.5	32.0	12.6	44.6	68.2	-23.6	Peak	Horizontal
*	10197.0	33.4	14.4	47.8	68.2	-20.4	Peak	Horizontal
	11642.0	31.0	17.9	48.9	74.0	-25.1	Peak	Horizontal
	8267.5	32.7	11.2	43.9	74.0	-30.1	Peak	Vertical
*	8692.5	31.9	12.6	44.5	68.2	-23.7	Peak	Vertical
*	10129.0	32.5	14.2	46.7	68.2	-21.5	Peak	Vertical
	11370.0	31.4	17.2	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8378.0	34.3	11.1	45.4	74.0	-28.6	Peak	Horizontal
*	8803.0	31.9	12.6	44.5	68.2	-23.7	Peak	Horizontal
*	9789.0	33.2	13.6	46.8	68.2	-21.4	Peak	Horizontal
	11718.5	31.3	17.8	49.1	74.0	-24.9	Peak	Horizontal
	8386.5	32.4	11.2	43.6	74.0	-30.4	Peak	Vertical
*	8735.0	31.2	12.5	43.7	68.2	-24.5	Peak	Vertical
*	10358.5	31.4	15.1	46.5	68.2	-21.7	Peak	Vertical
	11548.5	31.9	17.7	49.6	74.0	-24.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	7460.0	32.0	12.2	44.2	74.0	-29.8	Peak	Horizontal
*	10299.0	32.9	14.9	47.8	68.2	-20.4	Peak	Horizontal
	11310.5	32.2	17.3	49.5	74.0	-24.5	Peak	Horizontal
*	13707.5	31.0	19.1	50.1	68.2	-18.1	Peak	Horizontal
	7613.0	32.9	11.8	44.7	74.0	-29.3	Peak	Vertical
*	8709.5	32.4	12.5	44.9	68.2	-23.3	Peak	Vertical
*	10120.5	32.9	14.1	47.0	68.2	-21.2	Peak	Vertical
	11582.5	31.9	17.5	49.4	74.0	-24.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE20 – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	8420.5	32.7	11.4	44.1	74.0	-29.9	Peak	Horizontal
*	8811.5	31.1	12.7	43.8	68.2	-24.4	Peak	Horizontal
*	9993.0	30.7	13.7	44.4	68.2	-23.8	Peak	Horizontal
	11514.5	31.9	17.3	49.2	74.0	-24.8	Peak	Horizontal
	7494.0	31.1	12.0	43.1	74.0	-30.9	Peak	Vertical
*	8769.0	32.2	12.8	45.0	68.2	-23.2	Peak	Vertical
*	10035.5	33.1	13.9	47.0	68.2	-21.2	Peak	Vertical
	11574.0	31.4	17.7	49.1	74.0	-24.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE20 – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	8284.5	32.3	11.1	43.4	74.0	-30.6	Peak	Horizontal
*	8692.5	31.2	12.6	43.8	68.2	-24.4	Peak	Horizontal
*	10112.0	32.4	14.0	46.4	68.2	-21.8	Peak	Horizontal
	11489.0	31.5	17.7	49.2	74.0	-24.8	Peak	Horizontal
	8182.5	32.8	11.5	44.3	74.0	-29.7	Peak	Vertical
*	8769.0	31.4	12.8	44.2	68.2	-24.0	Peak	Vertical
*	10197.0	33.1	14.4	47.5	68.2	-20.7	Peak	Vertical
	11582.5	31.7	17.5	49.2	74.0	-24.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8131.5	31.7	11.9	43.6	74.0	-30.4	Peak	Horizontal
*	8692.5	31.8	12.6	44.4	68.2	-23.8	Peak	Horizontal
*	10248.0	32.7	14.3	47.0	68.2	-21.2	Peak	Horizontal
	11259.5	32.6	17.1	49.7	74.0	-24.3	Peak	Horizontal
	8191.0	32.4	11.5	43.9	74.0	-30.1	Peak	Vertical
*	8735.0	30.7	12.5	43.2	68.2	-25.0	Peak	Vertical
*	9789.0	33.1	13.6	46.7	68.2	-21.5	Peak	Vertical
	11659.0	31.6	17.7	49.3	74.0	-24.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8242.0	32.5	11.0	43.5	74.0	-30.5	Peak	Horizontal
*	8879.5	31.4	12.8	44.2	68.2	-24.0	Peak	Horizontal
*	10129.0	33.5	14.2	47.7	68.2	-20.5	Peak	Horizontal
	11633.5	32.8	17.7	50.5	74.0	-23.5	Peak	Horizontal
	8352.5	33.1	11.1	44.2	74.0	-29.8	Peak	Vertical
*	8658.5	31.5	12.5	44.0	68.2	-24.2	Peak	Vertical
*	10112.0	33.3	14.0	47.3	68.2	-20.9	Peak	Vertical
	11421.0	32.1	17.4	49.5	74.0	-24.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8403.5	33.0	11.5	44.5	74.0	-29.5	Peak	Horizontal
*	8692.5	31.8	12.6	44.4	68.2	-23.8	Peak	Horizontal
*	10205.5	33.6	14.3	47.9	68.2	-20.3	Peak	Horizontal
	11744.0	31.7	17.6	49.3	74.0	-24.7	Peak	Horizontal
	8378.0	33.2	11.1	44.3	74.0	-29.7	Peak	Vertical
*	8743.5	32.8	12.5	45.3	68.2	-22.9	Peak	Vertical
*	9925.0	33.8	13.7	47.5	68.2	-20.7	Peak	Vertical
	11565.5	31.5	17.8	49.3	74.0	-24.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	8310.0	33.9	10.9	44.8	74.0	-29.2	Peak	Horizontal
*	8837.0	31.7	12.7	44.4	68.2	-23.8	Peak	Horizontal
*	10239.5	32.7	14.3	47.0	68.2	-21.2	Peak	Horizontal
	11548.5	31.8	17.7	49.5	74.0	-24.5	Peak	Horizontal
	8097.5	32.0	12.0	44.0	74.0	-30.0	Peak	Vertical
*	8582.0	31.1	12.1	43.2	68.2	-25.0	Peak	Vertical
*	9891.0	34.3	13.7	48.0	68.2	-20.2	Peak	Vertical
	11565.5	31.5	17.8	49.3	74.0	-24.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7723.5	33.4	11.1	44.5	74.0	-29.5	Peak	Horizontal
*	8735.0	31.6	12.5	44.1	68.2	-24.1	Peak	Horizontal
*	10010.0	33.2	13.8	47.0	68.2	-21.2	Peak	Horizontal
	11506.0	31.2	17.4	48.6	74.0	-25.4	Peak	Horizontal
*	8582.0	34.1	12.1	46.2	68.2	-22.0	Peak	Vertical
	9092.0	31.6	13.4	45.0	74.0	-29.0	Peak	Vertical
*	10214.0	32.7	14.3	47.0	68.2	-21.2	Peak	Vertical
	11667.5	32.0	17.5	49.5	74.0	-24.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8276.0	33.4	11.2	44.6	74.0	-29.4	Peak	Horizontal
*	8760.5	32.3	12.7	45.0	68.2	-23.2	Peak	Horizontal
*	10188.5	33.1	14.3	47.4	68.2	-20.8	Peak	Horizontal
	11650.5	31.3	17.8	49.1	74.0	-24.9	Peak	Horizontal
	8318.5	33.3	10.9	44.2	74.0	-29.8	Peak	Vertical
*	8667.0	31.9	12.5	44.4	68.2	-23.8	Peak	Vertical
*	10129.0	32.7	14.2	46.9	68.2	-21.3	Peak	Vertical
	11557.0	31.3	17.9	49.2	74.0	-24.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8259.0	31.5	11.1	42.6	74.0	-31.4	Peak	Horizontal
*	8743.5	31.4	12.5	43.9	68.2	-24.3	Peak	Horizontal
*	10010.0	32.3	13.8	46.1	68.2	-22.1	Peak	Horizontal
	11659.0	32.0	17.7	49.7	74.0	-24.3	Peak	Horizontal
	8250.5	32.7	11.0	43.7	74.0	-30.3	Peak	Vertical
*	8675.5	31.1	12.4	43.5	68.2	-24.7	Peak	Vertical
*	10469.0	32.8	15.3	48.1	68.2	-20.1	Peak	Vertical
	11472.0	31.7	17.5	49.2	74.0	-24.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	8276.0	32.6	11.2	43.8	74.0	-30.2	Peak	Horizontal
*	8769.0	31.5	12.8	44.3	68.2	-23.9	Peak	Horizontal
*	10469.0	32.2	15.3	47.5	68.2	-20.7	Peak	Horizontal
	11336.0	31.9	17.4	49.3	74.0	-24.7	Peak	Horizontal
	8293.0	33.6	11.0	44.6	74.0	-29.4	Peak	Vertical
*	8743.5	31.4	12.5	43.9	68.2	-24.3	Peak	Vertical
*	10214.0	33.1	14.3	47.4	68.2	-20.8	Peak	Vertical
	11565.5	31.4	17.8	49.2	74.0	-24.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8454.5	33.1	11.7	44.8	74.0	-29.2	Peak	Horizontal
*	8692.5	31.5	12.6	44.1	68.2	-24.1	Peak	Horizontal
*	9882.5	33.9	13.6	47.5	68.2	-20.7	Peak	Horizontal
	11353.0	31.7	17.2	48.9	74.0	-25.1	Peak	Horizontal
	8344.0	33.7	11.1	44.8	74.0	-29.2	Peak	Vertical
*	8667.0	31.8	12.5	44.3	68.2	-23.9	Peak	Vertical
*	10197.0	33.1	14.4	47.5	68.2	-20.7	Peak	Vertical
	11574.0	31.8	17.7	49.5	74.0	-24.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	8097.5	33.2	12.0	45.2	74.0	-28.8	Peak	Horizontal
*	8675.5	31.8	12.4	44.2	68.2	-24.0	Peak	Horizontal
*	9797.5	33.1	13.7	46.8	68.2	-21.4	Peak	Horizontal
	11480.5	31.8	17.6	49.4	74.0	-24.6	Peak	Horizontal
	8267.5	32.8	11.2	44.0	74.0	-30.0	Peak	Vertical
*	8650.0	31.5	12.5	44.0	68.2	-24.2	Peak	Vertical
*	9627.5	34.0	13.3	47.3	68.2	-20.9	Peak	Vertical
	11667.5	31.7	17.5	49.2	74.0	-24.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	8267.5	33.2	11.2	44.4	74.0	-29.6	Peak	Horizontal
*	8735.0	31.0	12.5	43.5	68.2	-24.7	Peak	Horizontal
*	10205.5	33.4	14.3	47.7	68.2	-20.5	Peak	Horizontal
	11905.5	31.5	17.4	48.9	74.0	-25.1	Peak	Horizontal
	8267.5	33.0	11.2	44.2	74.0	-29.8	Peak	Vertical
*	8803.0	32.2	12.6	44.8	68.2	-23.4	Peak	Vertical
*	10214.0	34.2	14.3	48.5	68.2	-19.7	Peak	Vertical
	11489.0	31.2	17.7	48.9	74.0	-25.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8446.0	33.8	11.7	45.5	74.0	-28.5	Peak	Horizontal
*	8658.5	31.5	12.5	44.0	68.2	-24.2	Peak	Horizontal
*	10137.5	33.0	14.1	47.1	68.2	-21.1	Peak	Horizontal
	11497.5	31.8	17.6	49.4	74.0	-24.6	Peak	Horizontal
	8276.0	32.1	11.2	43.3	74.0	-30.7	Peak	Vertical
*	8667.0	30.8	12.5	43.3	68.2	-24.9	Peak	Vertical
*	10146.0	32.7	13.9	46.6	68.2	-21.6	Peak	Vertical
	11803.5	32.9	17.7	50.6	74.0	-23.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8403.5	33.0	11.5	44.5	74.0	-29.5	Peak	Horizontal
*	8828.5	30.6	12.7	43.3	68.2	-24.9	Peak	Horizontal
*	10460.5	33.0	15.3	48.3	68.2	-19.9	Peak	Horizontal
	11642.0	31.5	17.9	49.4	74.0	-24.6	Peak	Horizontal
	8208.0	33.0	11.3	44.3	74.0	-29.7	Peak	Vertical
*	8667.0	31.8	12.5	44.3	68.2	-23.9	Peak	Vertical
*	10120.5	33.1	14.1	47.2	68.2	-21.0	Peak	Vertical
	11548.5	31.6	17.7	49.3	74.0	-24.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8250.5	33.0	11.0	44.0	74.0	-30.0	Peak	Horizontal
*	8769.0	31.2	12.8	44.0	68.2	-24.2	Peak	Horizontal
*	10163.0	32.8	14.0	46.8	68.2	-21.4	Peak	Horizontal
	11310.5	32.3	17.3	49.6	74.0	-24.4	Peak	Horizontal
	8242.0	32.1	11.0	43.1	74.0	-30.9	Peak	Vertical
*	8735.0	31.2	12.5	43.7	68.2	-24.5	Peak	Vertical
*	10129.0	32.7	14.2	46.9	68.2	-21.3	Peak	Vertical
	11370.0	32.1	17.2	49.3	74.0	-24.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE80 – Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8429.0	33.0	11.5	44.5	74.0	-29.5	Peak	Horizontal
*	8658.5	32.0	12.5	44.5	68.2	-23.7	Peak	Horizontal
*	10290.5	32.5	14.8	47.3	68.2	-20.9	Peak	Horizontal
	11582.5	31.9	17.5	49.4	74.0	-24.6	Peak	Horizontal
	8488.5	32.8	11.7	44.5	74.0	-29.5	Peak	Vertical
*	8811.5	31.3	12.7	44.0	68.2	-24.2	Peak	Vertical
*	10137.5	33.5	14.1	47.6	68.2	-20.6	Peak	Vertical
	11565.5	32.5	17.8	50.3	74.0	-23.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8089.0	32.7	11.8	44.5	74.0	-29.5	Peak	Horizontal
*	8735.0	31.8	12.5	44.3	68.2	-23.9	Peak	Horizontal
*	10333.0	31.7	15.1	46.8	68.2	-21.4	Peak	Horizontal
	11472.0	33.3	17.5	50.8	74.0	-23.2	Peak	Horizontal
	8106.0	32.6	12.1	44.7	74.0	-29.3	Peak	Vertical
*	8658.5	32.3	12.5	44.8	68.2	-23.4	Peak	Vertical
*	10129.0	33.8	14.2	48.0	68.2	-20.2	Peak	Vertical
	11557.0	31.0	17.9	48.9	74.0	-25.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE160 – Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7494.0	32.9	12.0	44.9	74.0	-29.1	Peak	Horizontal
*	8675.5	31.5	12.4	43.9	68.2	-24.3	Peak	Horizontal
*	10205.5	33.9	14.3	48.2	68.2	-20.0	Peak	Horizontal
	11667.5	32.2	17.5	49.7	74.0	-24.3	Peak	Horizontal
	7562.0	32.3	11.9	44.2	74.0	-29.8	Peak	Vertical
*	8641.5	33.1	12.4	45.5	68.2	-22.7	Peak	Vertical
*	9789.0	33.1	13.6	46.7	68.2	-21.5	Peak	Vertical
	11625.0	32.1	17.6	49.7	74.0	-24.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11ax-HE160 – Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8199.5	33.1	11.4	44.5	74.0	-29.5	Peak	Horizontal
*	8777.5	32.6	12.7	45.3	68.2	-22.9	Peak	Horizontal
*	9882.5	33.4	13.6	47.0	68.2	-21.2	Peak	Horizontal
	11557.0	31.9	17.9	49.8	74.0	-24.2	Peak	Horizontal
	8174.0	33.2	11.5	44.7	74.0	-29.3	Peak	Vertical
*	8692.5	32.0	12.6	44.6	68.2	-23.6	Peak	Vertical
*	10197.0	33.2	14.4	47.6	68.2	-20.6	Peak	Vertical
	11565.5	31.1	17.8	48.9	74.0	-25.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT20 – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8361.0	33.1	11.1	44.2	74.0	-29.8	Peak	Horizontal
*	8658.5	31.2	12.5	43.7	68.2	-24.5	Peak	Horizontal
*	10120.5	33.1	14.1	47.2	68.2	-21.0	Peak	Horizontal
	11557.0	31.6	17.9	49.5	74.0	-24.5	Peak	Horizontal
	8454.5	33.6	11.7	45.3	74.0	-28.7	Peak	Vertical
*	8777.5	31.7	12.7	44.4	68.2	-23.8	Peak	Vertical
*	10494.5	32.3	15.4	47.7	68.2	-20.5	Peak	Vertical
	11642.0	31.6	17.9	49.5	74.0	-24.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT20 – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	7604.5	32.8	11.6	44.4	74.0	-29.6	Peak	Horizontal
*	8684.0	32.5	12.5	45.0	68.2	-23.2	Peak	Horizontal
*	10205.5	34.0	14.3	48.3	68.2	-19.9	Peak	Horizontal
	11540.0	32.3	17.6	49.9	74.0	-24.1	Peak	Horizontal
	8276.0	32.7	11.2	43.9	74.0	-30.1	Peak	Vertical
*	8794.5	31.6	12.6	44.2	68.2	-24.0	Peak	Vertical
*	10120.5	32.3	14.1	46.4	68.2	-21.8	Peak	Vertical
	11557.0	31.3	17.9	49.2	74.0	-24.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT20 – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8097.5	32.9	12.0	44.9	74.0	-29.1	Peak	Horizontal
*	8692.5	32.3	12.6	44.9	68.2	-23.3	Peak	Horizontal
*	9908.0	33.2	13.6	46.8	68.2	-21.4	Peak	Horizontal
	11489.0	32.3	17.7	50.0	74.0	-24.0	Peak	Horizontal
	8131.5	32.9	11.9	44.8	74.0	-29.2	Peak	Vertical
*	8658.5	31.6	12.5	44.1	68.2	-24.1	Peak	Vertical
*	10171.5	33.0	14.1	47.1	68.2	-21.1	Peak	Vertical
	11089.5	32.4	16.8	49.2	74.0	-24.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8369.5	33.4	11.1	44.5	74.0	-29.5	Peak	Horizontal
*	8667.0	32.0	12.5	44.5	68.2	-23.7	Peak	Horizontal
*	10460.5	31.7	15.3	47.0	68.2	-21.2	Peak	Horizontal
	11548.5	32.9	17.7	50.6	74.0	-23.4	Peak	Horizontal
	8446.0	33.2	11.7	44.9	74.0	-29.1	Peak	Vertical
*	8667.0	31.4	12.5	43.9	68.2	-24.3	Peak	Vertical
*	10197.0	33.7	14.4	48.1	68.2	-20.1	Peak	Vertical
	11327.5	33.2	17.4	50.6	74.0	-23.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8097.5	32.8	12.0	44.8	74.0	-29.2	Peak	Horizontal
*	8692.5	31.4	12.6	44.0	68.2	-24.2	Peak	Horizontal
*	10239.5	33.5	14.3	47.8	68.2	-20.4	Peak	Horizontal
	11489.0	30.8	17.7	48.5	74.0	-25.5	Peak	Horizontal
	8259.0	32.0	11.1	43.1	74.0	-30.9	Peak	Vertical
*	8658.5	30.7	12.5	43.2	68.2	-25.0	Peak	Vertical
*	10120.5	33.1	14.1	47.2	68.2	-21.0	Peak	Vertical
	11650.5	31.5	17.8	49.3	74.0	-24.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	7485.5	30.9	12.0	42.9	74.0	-31.1	Peak	Horizontal
*	8735.0	32.5	12.5	45.0	68.2	-23.2	Peak	Horizontal
*	10188.5	32.2	14.3	46.5	68.2	-21.7	Peak	Horizontal
	11319.0	31.9	17.4	49.3	74.0	-24.7	Peak	Horizontal
	8284.5	32.8	11.1	43.9	74.0	-30.1	Peak	Vertical
*	8769.0	31.1	12.8	43.9	68.2	-24.3	Peak	Vertical
*	10299.0	32.8	14.9	47.7	68.2	-20.5	Peak	Vertical
	11327.5	31.3	17.4	48.7	74.0	-25.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8352.5	31.7	11.1	42.8	74.0	-31.2	Peak	Horizontal
*	8769.0	32.0	12.8	44.8	68.2	-23.4	Peak	Horizontal
*	10044.0	33.1	13.9	47.0	68.2	-21.2	Peak	Horizontal
	11497.5	31.5	17.6	49.1	74.0	-24.9	Peak	Horizontal
	8276.0	32.4	11.2	43.6	74.0	-30.4	Peak	Vertical
*	8845.5	30.5	12.8	43.3	68.2	-24.9	Peak	Vertical
*	10044.0	32.4	13.9	46.3	68.2	-21.9	Peak	Vertical
	11497.5	31.2	17.6	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8259.0	33.0	11.1	44.1	74.0	-29.9	Peak	Horizontal
*	8675.5	32.9	12.4	45.3	68.2	-22.9	Peak	Horizontal
*	10367.0	32.0	15.1	47.1	68.2	-21.1	Peak	Horizontal
	12305.0	31.9	17.6	49.5	74.0	-24.5	Peak	Horizontal
	8386.5	32.9	11.2	44.1	74.0	-29.9	Peak	Vertical
*	8854.0	31.1	12.8	43.9	68.2	-24.3	Peak	Vertical
*	10265.0	32.9	14.6	47.5	68.2	-20.7	Peak	Vertical
	11370.0	31.9	17.2	49.1	74.0	-24.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8429.0	32.3	11.5	43.8	74.0	-30.2	Peak	Horizontal
*	8658.5	31.1	12.5	43.6	68.2	-24.6	Peak	Horizontal
*	10129.0	32.8	14.2	47.0	68.2	-21.2	Peak	Horizontal
	11531.5	31.2	17.3	48.5	74.0	-25.5	Peak	Horizontal
	8301.5	33.9	10.9	44.8	74.0	-29.2	Peak	Vertical
*	8922.0	31.8	13.3	45.1	68.2	-23.1	Peak	Vertical
*	9942.0	31.4	13.8	45.2	68.2	-23.0	Peak	Vertical
	11548.5	32.5	17.7	50.2	74.0	-23.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8344.0	33.1	11.1	44.2	74.0	-29.8	Peak	Horizontal
*	8820.0	30.3	12.7	43.0	68.2	-25.2	Peak	Horizontal
*	10205.5	32.1	14.3	46.4	68.2	-21.8	Peak	Horizontal
	11370.0	31.5	17.2	48.7	74.0	-25.3	Peak	Horizontal
	8089.0	32.8	11.8	44.6	74.0	-29.4	Peak	Vertical
*	8777.5	31.8	12.7	44.5	68.2	-23.7	Peak	Vertical
*	9891.0	33.9	13.7	47.6	68.2	-20.6	Peak	Vertical
	11812.0	31.7	17.7	49.4	74.0	-24.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8140.0	32.2	11.7	43.9	74.0	-30.1	Peak	Horizontal
*	8803.0	31.7	12.6	44.3	68.2	-23.9	Peak	Horizontal
*	10290.5	32.1	14.8	46.9	68.2	-21.3	Peak	Horizontal
	11540.0	31.4	17.6	49.0	74.0	-25.0	Peak	Horizontal
	7443.0	32.6	12.1	44.7	74.0	-29.3	Peak	Vertical
*	8735.0	31.1	12.5	43.6	68.2	-24.6	Peak	Vertical
*	9797.5	33.3	13.7	47.0	68.2	-21.2	Peak	Vertical
	11531.5	32.2	17.3	49.5	74.0	-24.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT20 – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	8208.0	33.4	11.3	44.7	74.0	-29.3	Peak	Horizontal
*	8658.5	32.4	12.5	44.9	68.2	-23.3	Peak	Horizontal
*	10044.0	34.0	13.9	47.9	68.2	-20.3	Peak	Horizontal
	11557.0	31.0	17.9	48.9	74.0	-25.1	Peak	Horizontal
	8463.0	33.5	11.7	45.2	74.0	-28.8	Peak	Vertical
*	8752.0	31.6	12.6	44.2	68.2	-24.0	Peak	Vertical
*	10120.5	32.6	14.1	46.7	68.2	-21.5	Peak	Vertical
	11659.0	31.8	17.7	49.5	74.0	-24.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT20 – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	7502.5	32.5	12.0	44.5	74.0	-29.5	Peak	Horizontal
*	8786.0	30.4	12.7	43.1	68.2	-25.1	Peak	Horizontal
*	9899.5	33.2	13.6	46.8	68.2	-21.4	Peak	Horizontal
	11548.5	31.9	17.7	49.6	74.0	-24.4	Peak	Horizontal
	8369.5	33.3	11.1	44.4	74.0	-29.6	Peak	Vertical
*	8718.0	31.7	12.5	44.2	68.2	-24.0	Peak	Vertical
*	10120.5	33.0	14.1	47.1	68.2	-21.1	Peak	Vertical
	11557.0	31.2	17.9	49.1	74.0	-24.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	8276.0	32.3	11.2	43.5	74.0	-30.5	Peak	Horizontal
*	8820.0	31.2	12.7	43.9	68.2	-24.3	Peak	Horizontal
*	10214.0	32.8	14.3	47.1	68.2	-21.1	Peak	Horizontal
	10953.5	33.0	16.3	49.3	74.0	-24.7	Peak	Horizontal
	8123.0	33.2	12.0	45.2	74.0	-28.8	Peak	Vertical
*	8692.5	32.0	12.6	44.6	68.2	-23.6	Peak	Vertical
*	10290.5	32.6	14.8	47.4	68.2	-20.8	Peak	Vertical
	11565.5	31.5	17.8	49.3	74.0	-24.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	8114.5	32.2	12.1	44.3	74.0	-29.7	Peak	Horizontal
*	8828.5	31.6	12.7	44.3	68.2	-23.9	Peak	Horizontal
*	9857.0	33.8	13.5	47.3	68.2	-20.9	Peak	Horizontal
	11472.0	31.5	17.5	49.0	74.0	-25.0	Peak	Horizontal
	8497.0	32.0	11.7	43.7	74.0	-30.3	Peak	Vertical
*	8828.5	31.5	12.7	44.2	68.2	-24.0	Peak	Vertical
*	10035.5	33.3	13.9	47.2	68.2	-21.0	Peak	Vertical
	11327.5	31.5	17.4	48.9	74.0	-25.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7613.0	32.4	11.8	44.2	74.0	-29.8	Peak	Horizontal
*	8658.5	30.8	12.5	43.3	68.2	-24.9	Peak	Horizontal
*	9610.5	34.8	13.2	48.0	68.2	-20.2	Peak	Horizontal
	11599.5	31.4	17.2	48.6	74.0	-25.4	Peak	Horizontal
	8420.5	33.2	11.4	44.6	74.0	-29.4	Peak	Vertical
*	8828.5	30.7	12.7	43.4	68.2	-24.8	Peak	Vertical
*	10290.5	31.9	14.8	46.7	68.2	-21.5	Peak	Vertical
	11557.0	31.1	17.9	49.0	74.0	-25.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	7307.0	32.8	11.5	44.3	74.0	-29.7	Peak	Horizontal
*	8692.5	31.2	12.6	43.8	68.2	-24.4	Peak	Horizontal
*	10044.0	33.6	13.9	47.5	68.2	-20.7	Peak	Horizontal
	10987.5	32.5	16.4	48.9	74.0	-25.1	Peak	Horizontal
	9449.0	31.7	13.6	45.3	74.0	-28.7	Peak	Vertical
*	9942.0	32.2	13.8	46.0	68.2	-22.2	Peak	Vertical
	12058.5	29.5	17.0	46.5	74.0	-27.5	Peak	Vertical
*	14464.0	32.0	20.2	52.2	68.2	-16.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	9177.0	31.3	13.5	44.8	74.0	-29.2	Peak	Horizontal
*	9848.5	33.7	13.5	47.2	68.2	-21.0	Peak	Horizontal
	11089.5	32.2	16.8	49.0	74.0	-25.0	Peak	Horizontal
*	14345.0	32.1	20.2	52.3	68.2	-15.9	Peak	Horizontal
	9483.0	33.0	13.4	46.4	74.0	-27.6	Peak	Vertical
*	10205.5	33.7	14.3	48.0	68.2	-20.2	Peak	Vertical
	11514.5	31.9	17.3	49.2	74.0	-24.8	Peak	Vertical
*	14447.0	32.2	20.4	52.6	68.2	-15.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	8429.0	33.0	11.5	44.5	74.0	-29.5	Peak	Horizontal
*	9721.0	33.0	13.5	46.5	68.2	-21.7	Peak	Horizontal
	11531.5	31.6	17.3	48.9	74.0	-25.1	Peak	Horizontal
*	14379.0	32.1	20.1	52.2	68.2	-16.0	Peak	Horizontal
	9449.0	32.6	13.6	46.2	74.0	-27.8	Peak	Vertical
*	10120.5	32.5	14.1	46.6	68.2	-21.6	Peak	Vertical
	11565.5	31.1	17.8	48.9	74.0	-25.1	Peak	Vertical
*	14430.0	31.9	20.1	52.0	68.2	-16.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8199.5	31.3	11.4	42.7	74.0	-31.3	Peak	Horizontal
*	9789.0	32.7	13.6	46.3	68.2	-21.9	Peak	Horizontal
	11565.5	32.1	17.8	49.9	74.0	-24.1	Peak	Horizontal
*	14260.0	31.9	19.8	51.7	68.2	-16.5	Peak	Horizontal
	8140.0	32.9	11.7	44.6	74.0	-29.4	Peak	Vertical
*	8658.5	32.6	12.5	45.1	68.2	-23.1	Peak	Vertical
*	10137.5	32.8	14.1	46.9	68.2	-21.3	Peak	Vertical
	11489.0	31.2	17.7	48.9	74.0	-25.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	9381.0	31.2	13.7	44.9	74.0	-29.1	Peak	Horizontal
*	10435.0	32.0	15.5	47.5	68.2	-20.7	Peak	Horizontal
	11089.5	32.3	16.8	49.1	74.0	-24.9	Peak	Horizontal
*	14166.5	32.2	19.8	52.0	68.2	-16.2	Peak	Horizontal
	9483.0	32.4	13.4	45.8	74.0	-28.2	Peak	Vertical
*	10443.5	32.5	15.5	48.0	68.2	-20.2	Peak	Vertical
	11727.0	31.7	17.9	49.6	74.0	-24.4	Peak	Vertical
*	14362.0	32.0	20.2	52.2	68.2	-16.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8216.5	33.1	11.1	44.2	74.0	-29.8	Peak	Horizontal
*	9772.0	31.3	13.5	44.8	68.2	-23.4	Peak	Horizontal
	11395.5	32.5	17.5	50.0	74.0	-24.0	Peak	Horizontal
*	14319.5	31.8	20.0	51.8	68.2	-16.4	Peak	Horizontal
	8352.5	31.5	11.1	42.6	74.0	-31.4	Peak	Vertical
*	9721.0	33.7	13.5	47.2	68.2	-21.0	Peak	Vertical
	11327.5	31.3	17.4	48.7	74.0	-25.3	Peak	Vertical
*	14362.0	32.8	20.2	53.0	68.2	-15.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	9100.5	31.9	13.4	45.3	74.0	-28.7	Peak	Horizontal
*	10112.0	32.5	14.0	46.5	68.2	-21.7	Peak	Horizontal
	11565.5	31.7	17.8	49.5	74.0	-24.5	Peak	Horizontal
*	14039.0	32.9	19.9	52.8	68.2	-15.4	Peak	Horizontal
	9381.0	31.8	13.7	45.5	74.0	-28.5	Peak	Vertical
*	10214.0	33.1	14.3	47.4	68.2	-20.8	Peak	Vertical
	11489.0	32.6	17.7	50.3	74.0	-23.7	Peak	Vertical
*	14336.5	32.2	20.3	52.5	68.2	-15.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8310.0	31.5	10.9	42.4	74.0	-31.6	Peak	Horizontal
*	9933.5	33.4	13.8	47.2	68.2	-21.0	Peak	Horizontal
	11659.0	31.3	17.7	49.0	74.0	-25.0	Peak	Horizontal
*	14430.0	32.1	20.1	52.2	68.2	-16.0	Peak	Horizontal
	8335.5	32.7	11.0	43.7	74.0	-30.3	Peak	Vertical
*	10112.0	33.2	14.0	47.2	68.2	-21.0	Peak	Vertical
	11633.5	32.2	17.7	49.9	74.0	-24.1	Peak	Vertical
*	14447.0	32.4	20.4	52.8	68.2	-15.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	9466.0	32.1	13.6	45.7	74.0	-28.3	Peak	Horizontal
*	9865.5	32.9	13.5	46.4	68.2	-21.8	Peak	Horizontal
	11344.5	31.6	17.3	48.9	74.0	-25.1	Peak	Horizontal
*	14464.0	32.4	20.2	52.6	68.2	-15.6	Peak	Horizontal
	9423.5	31.5	13.8	45.3	74.0	-28.7	Peak	Vertical
*	10435.0	31.9	15.5	47.4	68.2	-20.8	Peak	Vertical
	11497.5	31.5	17.6	49.1	74.0	-24.9	Peak	Vertical
*	14328.0	32.6	20.2	52.8	68.2	-15.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	9432.0	31.3	13.7	45.0	74.0	-29.0	Peak	Horizontal
*	10188.5	34.0	14.3	48.3	68.2	-19.9	Peak	Horizontal
	11812.0	32.3	17.7	50.0	74.0	-24.0	Peak	Horizontal
*	14328.0	32.4	20.2	52.6	68.2	-15.6	Peak	Horizontal
	9355.5	32.6	13.9	46.5	74.0	-27.5	Peak	Vertical
*	10035.5	32.8	13.9	46.7	68.2	-21.5	Peak	Vertical
	11565.5	31.5	17.8	49.3	74.0	-24.7	Peak	Vertical
*	14183.5	32.5	19.9	52.4	68.2	-15.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	8769.0	31.6	12.8	44.4	68.2	-23.8	Peak	Horizontal
	9440.5	32.7	13.7	46.4	74.0	-27.6	Peak	Horizontal
	11463.5	32.1	17.5	49.6	74.0	-24.4	Peak	Horizontal
*	14328.0	33.0	20.2	53.2	68.2	-15.0	Peak	Horizontal
	8250.5	32.3	11.0	43.3	74.0	-30.7	Peak	Vertical
*	9695.5	33.7	13.5	47.2	68.2	-21.0	Peak	Vertical
	11616.5	31.4	17.4	48.8	74.0	-25.2	Peak	Vertical
*	14413.0	32.6	19.7	52.3	68.2	-15.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT80 – Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8318.5	32.4	10.9	43.3	74.0	-30.7	Peak	Horizontal
*	10222.5	32.8	14.2	47.0	68.2	-21.2	Peak	Horizontal
	12245.5	32.3	17.6	49.9	74.0	-24.1	Peak	Horizontal
*	14413.0	33.1	19.7	52.8	68.2	-15.4	Peak	Horizontal
	8191.0	33.9	11.5	45.4	74.0	-28.6	Peak	Vertical
*	9814.5	33.5	13.7	47.2	68.2	-21.0	Peak	Vertical
	11557.0	31.1	17.9	49.0	74.0	-25.0	Peak	Vertical
*	14345.0	31.7	20.2	51.9	68.2	-16.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8293.0	32.7	11.0	43.7	74.0	-30.3	Peak	Horizontal
*	10129.0	32.6	14.2	46.8	68.2	-21.4	Peak	Horizontal
	11795.0	31.6	17.7	49.3	74.0	-24.7	Peak	Horizontal
*	14447.0	31.9	20.4	52.3	68.2	-15.9	Peak	Horizontal
	9406.5	31.7	13.8	45.5	74.0	-28.5	Peak	Vertical
*	10197.0	33.1	14.4	47.5	68.2	-20.7	Peak	Vertical
	11735.5	31.2	17.7	48.9	74.0	-25.1	Peak	Vertical
*	14608.5	32.7	19.8	52.5	68.2	-15.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT160 – Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	9457.5	32.2	13.6	45.8	74.0	-28.2	Peak	Horizontal
*	10486.0	32.0	15.4	47.4	68.2	-20.8	Peak	Horizontal
	11412.5	32.1	17.5	49.6	74.0	-24.4	Peak	Horizontal
*	14413.0	32.2	19.7	51.9	68.2	-16.3	Peak	Horizontal
	8369.5	32.9	11.1	44.0	74.0	-30.0	Peak	Vertical
*	9806.0	32.8	13.8	46.6	68.2	-21.6	Peak	Vertical
	11514.5	32.1	17.3	49.4	74.0	-24.6	Peak	Vertical
*	14447.0	31.7	20.4	52.1	68.2	-16.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-01-03 ~ 2024-01-07	Test Mode	802.11be-EHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
	9160.0	31.0	13.7	44.7	74.0	-29.3	Peak	Horizontal
*	9882.5	33.1	13.6	46.7	68.2	-21.5	Peak	Horizontal
	11582.5	31.3	17.5	48.8	74.0	-25.2	Peak	Horizontal
*	14625.5	32.7	19.7	52.4	68.2	-15.8	Peak	Horizontal
	9423.5	31.0	13.8	44.8	74.0	-29.2	Peak	Vertical
*	10248.0	32.6	14.3	46.9	68.2	-21.3	Peak	Vertical
	11718.5	31.0	17.8	48.8	74.0	-25.2	Peak	Vertical
*	14506.5	32.2	19.5	51.7	68.2	-16.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

ANT 312# Normal Mode:

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11a – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9721.0	31.3	13.5	44.8	68.2	-23.4	Peak	Horizontal
*	9993.0	31.3	13.7	45.0	68.2	-23.2	Peak	Horizontal
	10877.0	30.5	16.3	46.8	74.0	-27.2	Peak	Horizontal
	11667.5	31.3	17.5	48.8	74.0	-25.2	Peak	Horizontal
*	9695.5	34.2	13.5	47.7	68.2	-20.5	Peak	Vertical
*	10307.5	30.4	14.9	45.3	68.2	-22.9	Peak	Vertical
	11531.5	30.9	17.3	48.2	74.0	-25.8	Peak	Vertical
	12271.0	31.0	17.3	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11a – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9653.0	32.9	13.5	46.4	68.2	-21.8	Peak	Horizontal
*	10256.5	32.5	14.5	47.0	68.2	-21.2	Peak	Horizontal
	11497.5	31.3	17.6	48.9	74.0	-25.1	Peak	Horizontal
	11812.0	30.6	17.7	48.3	74.0	-25.7	Peak	Horizontal
*	9678.5	31.2	13.5	44.7	68.2	-23.5	Peak	Vertical
*	10078.0	29.9	13.7	43.6	68.2	-24.6	Peak	Vertical
	11633.5	32.3	17.7	50.0	74.0	-24.0	Peak	Vertical
	12330.5	30.0	17.0	47.0	74.0	-27.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11a – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	10078.0	32.6	13.7	46.3	68.2	-21.9	Peak	Horizontal
*	10443.5	31.1	15.5	46.6	68.2	-21.6	Peak	Horizontal
	11021.5	29.5	16.4	45.9	74.0	-28.1	Peak	Horizontal
	11565.5	31.6	17.8	49.4	74.0	-24.6	Peak	Horizontal
*	9772.0	30.6	13.5	44.1	68.2	-24.1	Peak	Vertical
*	10307.5	30.0	14.9	44.9	68.2	-23.3	Peak	Vertical
	10928.0	29.7	16.7	46.4	74.0	-27.6	Peak	Vertical
	11429.5	28.8	17.3	46.1	74.0	-27.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11a – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	30.3	13.8	44.1	68.2	-24.1	Peak	Horizontal
*	10265.0	30.5	14.6	45.1	68.2	-23.1	Peak	Horizontal
	11514.5	31.9	17.3	49.2	74.0	-24.8	Peak	Horizontal
	11786.5	31.0	17.6	48.6	74.0	-25.4	Peak	Horizontal
*	9942.0	31.4	13.8	45.2	68.2	-23.0	Peak	Vertical
*	10214.0	30.8	14.3	45.1	68.2	-23.1	Peak	Vertical
	11072.5	29.5	16.5	46.0	74.0	-28.0	Peak	Vertical
	11497.5	31.0	17.6	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11a – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10078.0	31.9	13.7	45.6	68.2	-22.6	Peak	Horizontal
*	10401.0	32.3	15.1	47.4	68.2	-20.8	Peak	Horizontal
	10800.5	32.3	16.5	48.8	74.0	-25.2	Peak	Horizontal
	11531.5	30.2	17.3	47.5	74.0	-26.5	Peak	Horizontal
*	9899.5	31.5	13.6	45.1	68.2	-23.1	Peak	Vertical
*	10443.5	30.7	15.5	46.2	68.2	-22.0	Peak	Vertical
	10783.5	31.6	16.1	47.7	74.0	-26.3	Peak	Vertical
	11506.0	31.6	17.4	49.0	74.0	-25.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11a – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10197.0	32.0	14.4	46.4	68.2	-21.8	Peak	Horizontal
*	10384.0	33.5	15.1	48.6	68.2	-19.6	Peak	Horizontal
	10996.0	31.1	16.5	47.6	74.0	-26.4	Peak	Horizontal
	11548.5	31.1	17.7	48.8	74.0	-25.2	Peak	Horizontal
*	9670.0	33.6	13.4	47.0	68.2	-21.2	Peak	Vertical
*	10035.5	31.4	13.9	45.3	68.2	-22.9	Peak	Vertical
	10928.0	30.1	16.7	46.8	74.0	-27.2	Peak	Vertical
	11489.0	31.6	17.7	49.3	74.0	-24.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11a – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9712.5	33.3	13.5	46.8	68.2	-21.4	Peak	Horizontal
*	10197.0	32.5	14.4	46.9	68.2	-21.3	Peak	Horizontal
	11548.5	31.1	17.7	48.8	74.0	-25.2	Peak	Horizontal
	12186.0	30.8	17.7	48.5	74.0	-25.5	Peak	Horizontal
*	9644.5	32.8	13.5	46.3	68.2	-21.9	Peak	Vertical
*	10452.0	33.1	15.4	48.5	68.2	-19.7	Peak	Vertical
	11489.0	30.5	17.7	48.2	74.0	-25.8	Peak	Vertical
	11990.5	31.1	17.1	48.2	74.0	-25.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11a – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	30.8	13.5	44.3	68.2	-23.9	Peak	Horizontal
*	10120.5	30.4	14.1	44.5	68.2	-23.7	Peak	Horizontal
	10826.0	30.6	16.4	47.0	74.0	-27.0	Peak	Horizontal
	11480.5	30.7	17.6	48.3	74.0	-25.7	Peak	Horizontal
*	10120.5	30.5	14.1	44.6	68.2	-23.6	Peak	Vertical
	11446.5	31.6	17.3	48.9	74.0	-25.1	Peak	Vertical
	11744.0	31.4	17.6	49.0	74.0	-25.0	Peak	Vertical
*	16742.0	33.2	20.6	53.8	68.2	-14.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11a – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9993.0	31.5	13.7	45.2	68.2	-23.0	Peak	Horizontal
*	10435.0	32.6	15.5	48.1	68.2	-20.1	Peak	Horizontal
	11081.0	31.9	16.7	48.6	74.0	-25.4	Peak	Horizontal
	11574.0	30.6	17.7	48.3	74.0	-25.7	Peak	Horizontal
*	9814.5	31.0	13.7	44.7	68.2	-23.5	Peak	Vertical
*	10120.5	30.5	14.1	44.6	68.2	-23.6	Peak	Vertical
	10826.0	32.1	16.4	48.5	74.0	-25.5	Peak	Vertical
	11565.5	31.0	17.8	48.8	74.0	-25.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11a – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9899.5	30.6	13.6	44.2	68.2	-24.0	Peak	Horizontal
*	10350.0	30.0	15.2	45.2	68.2	-23.0	Peak	Horizontal
	10877.0	29.2	16.3	45.5	74.0	-28.5	Peak	Horizontal
	11803.5	30.8	17.7	48.5	74.0	-25.5	Peak	Horizontal
*	9899.5	32.5	13.6	46.1	68.2	-22.1	Peak	Vertical
*	10214.0	31.0	14.3	45.3	68.2	-22.9	Peak	Vertical
	11412.5	29.6	17.5	47.1	74.0	-26.9	Peak	Vertical
	11948.0	31.3	16.9	48.2	74.0	-25.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11a – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9865.5	33.5	13.5	47.0	68.2	-21.2	Peak	Horizontal
*	10265.0	32.3	14.6	46.9	68.2	-21.3	Peak	Horizontal
	11659.0	30.9	17.7	48.6	74.0	-25.4	Peak	Horizontal
	11990.5	30.6	17.1	47.7	74.0	-26.3	Peak	Horizontal
*	9593.5	31.3	13.3	44.6	68.2	-23.6	Peak	Vertical
*	10307.5	29.6	14.9	44.5	68.2	-23.7	Peak	Vertical
	11565.5	30.6	17.8	48.4	74.0	-25.6	Peak	Vertical
	11897.0	29.4	17.4	46.8	74.0	-27.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11a – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	30.5	13.5	44.0	68.2	-24.2	Peak	Horizontal
*	10350.0	30.6	15.2	45.8	68.2	-22.4	Peak	Horizontal
	11276.5	28.5	17.0	45.5	74.0	-28.5	Peak	Horizontal
	11727.0	30.9	17.9	48.8	74.0	-25.2	Peak	Horizontal
*	9993.0	31.5	13.7	45.2	68.2	-23.0	Peak	Vertical
*	10307.5	29.5	14.9	44.4	68.2	-23.8	Peak	Vertical
	11480.5	29.9	17.6	47.5	74.0	-26.5	Peak	Vertical
	12220.0	29.3	17.5	46.8	74.0	-27.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11a – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	32.2	13.7	45.9	68.2	-22.3	Peak	Horizontal
*	10214.0	29.7	14.3	44.0	68.2	-24.2	Peak	Horizontal
	11089.5	31.0	16.8	47.8	74.0	-26.2	Peak	Horizontal
	11897.0	29.6	17.4	47.0	74.0	-27.0	Peak	Horizontal
*	9772.0	31.3	13.5	44.8	68.2	-23.4	Peak	Vertical
*	10078.0	31.3	13.7	45.0	68.2	-23.2	Peak	Vertical
	10826.0	30.5	16.4	46.9	74.0	-27.1	Peak	Vertical
	11565.5	30.6	17.8	48.4	74.0	-25.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT20 – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9721.0	31.5	13.5	45.0	68.2	-23.2	Peak	Horizontal
*	10307.5	30.6	14.9	45.5	68.2	-22.7	Peak	Horizontal
	11225.5	29.6	16.9	46.5	74.0	-27.5	Peak	Horizontal
	11582.5	29.7	17.5	47.2	74.0	-26.8	Peak	Horizontal
*	9721.0	33.6	13.5	47.1	68.2	-21.1	Peak	Vertical
*	10443.5	30.9	15.5	46.4	68.2	-21.8	Peak	Vertical
	11123.5	31.4	16.4	47.8	74.0	-26.2	Peak	Vertical
	11710.0	31.2	17.8	49.0	74.0	-25.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT20 – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10035.5	30.1	13.9	44.0	68.2	-24.2	Peak	Horizontal
*	10401.0	30.7	15.1	45.8	68.2	-22.4	Peak	Horizontal
	11548.5	30.9	17.7	48.6	74.0	-25.4	Peak	Horizontal
	11684.5	30.9	17.3	48.2	74.0	-25.8	Peak	Horizontal
*	9814.5	31.5	13.7	45.2	68.2	-23.0	Peak	Vertical
*	10265.0	30.6	14.6	45.2	68.2	-23.0	Peak	Vertical
	11123.5	31.0	16.4	47.4	74.0	-26.6	Peak	Vertical
	11650.5	31.1	17.8	48.9	74.0	-25.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT20 – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	31.0	13.7	44.7	68.2	-23.5	Peak	Horizontal
*	10350.0	30.9	15.2	46.1	68.2	-22.1	Peak	Horizontal
	11472.0	30.7	17.5	48.2	74.0	-25.8	Peak	Horizontal
	11846.0	30.0	17.1	47.1	74.0	-26.9	Peak	Horizontal
*	9772.0	29.9	13.5	43.4	68.2	-24.8	Peak	Vertical
*	10265.0	30.8	14.6	45.4	68.2	-22.8	Peak	Vertical
	11565.5	31.3	17.8	49.1	74.0	-24.9	Peak	Vertical
	12109.5	29.0	17.0	46.0	74.0	-28.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	31.5	13.8	45.3	68.2	-22.9	Peak	Horizontal
*	10307.5	30.2	14.9	45.1	68.2	-23.1	Peak	Horizontal
	11123.5	32.3	16.4	48.7	74.0	-25.3	Peak	Horizontal
	11650.5	31.3	17.8	49.1	74.0	-24.9	Peak	Horizontal
*	9993.0	31.2	13.7	44.9	68.2	-23.3	Peak	Vertical
*	10307.5	30.8	14.9	45.7	68.2	-22.5	Peak	Vertical
	11557.0	30.5	17.9	48.4	74.0	-25.6	Peak	Vertical
	12330.5	29.7	17.0	46.7	74.0	-27.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9712.5	33.4	13.5	46.9	68.2	-21.3	Peak	Horizontal
*	10214.0	30.0	14.3	44.3	68.2	-23.9	Peak	Horizontal
	11608.0	31.8	17.2	49.0	74.0	-25.0	Peak	Horizontal
	11905.5	31.6	17.4	49.0	74.0	-25.0	Peak	Horizontal
*	9636.0	31.5	13.4	44.9	68.2	-23.3	Peak	Vertical
*	10214.0	30.2	14.3	44.5	68.2	-23.7	Peak	Vertical
	10877.0	31.1	16.3	47.4	74.0	-26.6	Peak	Vertical
	11565.5	31.0	17.8	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10120.5	30.6	14.1	44.7	68.2	-23.5	Peak	Horizontal
*	10443.5	30.2	15.5	45.7	68.2	-22.5	Peak	Horizontal
	11276.5	28.4	17.0	45.4	74.0	-28.6	Peak	Horizontal
	11659.0	31.0	17.7	48.7	74.0	-25.3	Peak	Horizontal
*	10035.5	30.9	13.9	44.8	68.2	-23.4	Peak	Vertical
*	10265.0	30.9	14.6	45.5	68.2	-22.7	Peak	Vertical
	11098.0	32.4	16.8	49.2	74.0	-24.8	Peak	Vertical
	12500.5	29.5	16.5	46.0	74.0	-28.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9678.5	31.0	13.5	44.5	68.2	-23.7	Peak	Horizontal
*	9942.0	32.0	13.8	45.8	68.2	-22.4	Peak	Horizontal
	10809.0	32.2	16.5	48.7	74.0	-25.3	Peak	Horizontal
	11531.5	29.3	17.3	46.6	74.0	-27.4	Peak	Horizontal
*	9942.0	30.3	13.8	44.1	68.2	-24.1	Peak	Vertical
*	10537.0	30.9	15.2	46.1	68.2	-22.1	Peak	Vertical
	11633.5	29.1	17.7	46.8	74.0	-27.2	Peak	Vertical
	11948.0	30.1	16.9	47.0	74.0	-27.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	31.3	13.8	45.1	68.2	-23.1	Peak	Horizontal
*	10214.0	30.5	14.3	44.8	68.2	-23.4	Peak	Horizontal
	11174.5	30.8	17.0	47.8	74.0	-26.2	Peak	Horizontal
	11897.0	31.4	17.4	48.8	74.0	-25.2	Peak	Horizontal
*	9721.0	32.7	13.5	46.2	68.2	-22.0	Peak	Vertical
*	10078.0	31.4	13.7	45.1	68.2	-23.1	Peak	Vertical
	10970.5	29.6	16.2	45.8	74.0	-28.2	Peak	Vertical
	11786.5	29.0	17.6	46.6	74.0	-27.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10035.5	30.8	13.9	44.7	68.2	-23.5	Peak	Horizontal
*	10443.5	30.2	15.5	45.7	68.2	-22.5	Peak	Horizontal
	11174.5	30.9	17.0	47.9	74.0	-26.1	Peak	Horizontal
	11897.0	29.6	17.4	47.0	74.0	-27.0	Peak	Horizontal
*	9899.5	30.7	13.6	44.3	68.2	-23.9	Peak	Vertical
*	10307.5	29.9	14.9	44.8	68.2	-23.4	Peak	Vertical
	11446.5	31.3	17.3	48.6	74.0	-25.4	Peak	Vertical
	12109.5	29.2	17.0	46.2	74.0	-27.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9823.0	33.4	13.5	46.9	68.2	-21.3	Peak	Horizontal
*	10078.0	33.2	13.7	46.9	68.2	-21.3	Peak	Horizontal
	11429.5	31.5	17.3	48.8	74.0	-25.2	Peak	Horizontal
	11897.0	30.2	17.4	47.6	74.0	-26.4	Peak	Horizontal
*	9814.5	32.9	13.7	46.6	68.2	-21.6	Peak	Vertical
*	10350.0	30.7	15.2	45.9	68.2	-22.3	Peak	Vertical
	11072.5	30.6	16.5	47.1	74.0	-26.9	Peak	Vertical
	11582.5	29.5	17.5	47.0	74.0	-27.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9678.5	31.2	13.5	44.7	68.2	-23.5	Peak	Horizontal
*	10120.5	30.5	14.1	44.6	68.2	-23.6	Peak	Horizontal
	11472.0	30.8	17.5	48.3	74.0	-25.7	Peak	Horizontal
	11684.5	28.9	17.3	46.2	74.0	-27.8	Peak	Horizontal
*	9593.5	30.9	13.3	44.2	68.2	-24.0	Peak	Vertical
*	10171.5	30.8	14.1	44.9	68.2	-23.3	Peak	Vertical
	11004.5	31.5	16.5	48.0	74.0	-26.0	Peak	Vertical
	12441.0	29.6	16.6	46.2	74.0	-27.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT20 – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9899.5	31.0	13.6	44.6	68.2	-23.6	Peak	Horizontal
*	10443.5	30.3	15.5	45.8	68.2	-22.4	Peak	Horizontal
	11327.5	28.6	17.4	46.0	74.0	-28.0	Peak	Horizontal
	11846.0	28.5	17.1	45.6	74.0	-28.4	Peak	Horizontal
*	9678.5	31.1	13.5	44.6	68.2	-23.6	Peak	Vertical
*	10401.0	29.9	15.1	45.0	68.2	-23.2	Peak	Vertical
	11540.0	31.1	17.6	48.7	74.0	-25.3	Peak	Vertical
	11786.5	29.0	17.6	46.6	74.0	-27.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT20 – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9678.5	31.5	13.5	45.0	68.2	-23.2	Peak	Horizontal
*	10214.0	30.5	14.3	44.8	68.2	-23.4	Peak	Horizontal
	11378.5	29.6	17.3	46.9	74.0	-27.1	Peak	Horizontal
	11557.0	30.5	17.9	48.4	74.0	-25.6	Peak	Horizontal
*	9993.0	30.9	13.7	44.6	68.2	-23.6	Peak	Vertical
*	10120.5	30.8	14.1	44.9	68.2	-23.3	Peak	Vertical
	11480.5	28.0	17.6	45.6	74.0	-28.4	Peak	Vertical
	11735.5	29.3	17.7	47.0	74.0	-27.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9993.0	31.6	13.7	45.3	68.2	-22.9	Peak	Horizontal
*	10537.0	30.6	15.2	45.8	68.2	-22.4	Peak	Horizontal
	11497.5	31.5	17.6	49.1	74.0	-24.9	Peak	Horizontal
	12169.0	29.7	17.4	47.1	74.0	-26.9	Peak	Horizontal
*	9678.5	31.8	13.5	45.3	68.2	-22.9	Peak	Vertical
*	10265.0	29.8	14.6	44.4	68.2	-23.8	Peak	Vertical
	10877.0	29.6	16.3	45.9	74.0	-28.1	Peak	Vertical
	11557.0	31.3	17.9	49.2	74.0	-24.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9721.0	31.1	13.5	44.6	68.2	-23.6	Peak	Horizontal
*	10214.0	30.4	14.3	44.7	68.2	-23.5	Peak	Horizontal
	10817.5	31.9	16.5	48.4	74.0	-25.6	Peak	Horizontal
	11276.5	29.0	17.0	46.0	74.0	-28.0	Peak	Horizontal
*	9636.0	32.0	13.4	45.4	68.2	-22.8	Peak	Vertical
*	10214.0	30.5	14.3	44.8	68.2	-23.4	Peak	Vertical
	10741.0	31.3	16.1	47.4	74.0	-26.6	Peak	Vertical
	11684.5	29.2	17.3	46.5	74.0	-27.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9721.0	32.0	13.5	45.5	68.2	-22.7	Peak	Horizontal
*	10120.5	31.6	14.1	45.7	68.2	-22.5	Peak	Horizontal
	10877.0	30.7	16.3	47.0	74.0	-27.0	Peak	Horizontal
	11591.0	31.2	17.3	48.5	74.0	-25.5	Peak	Horizontal
*	9593.5	30.1	13.3	43.4	68.2	-24.8	Peak	Vertical
*	9993.0	30.0	13.7	43.7	68.2	-24.5	Peak	Vertical
	11531.5	31.2	17.3	48.5	74.0	-25.5	Peak	Vertical
	12347.5	32.2	16.8	49.0	74.0	-25.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9636.0	31.4	13.4	44.8	68.2	-23.4	Peak	Horizontal
*	10078.0	33.3	13.7	47.0	68.2	-21.2	Peak	Horizontal
	10826.0	29.8	16.4	46.2	74.0	-27.8	Peak	Horizontal
	11480.5	29.7	17.6	47.3	74.0	-26.7	Peak	Horizontal
*	9993.0	30.8	13.7	44.5	68.2	-23.7	Peak	Vertical
*	10265.0	31.0	14.6	45.6	68.2	-22.6	Peak	Vertical
	11174.5	30.5	17.0	47.5	74.0	-26.5	Peak	Vertical
	11489.0	30.3	17.7	48.0	74.0	-26.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	31.7	13.8	45.5	68.2	-22.7	Peak	Horizontal
*	10350.0	31.0	15.2	46.2	68.2	-22.0	Peak	Horizontal
	11514.5	30.9	17.3	48.2	74.0	-25.8	Peak	Horizontal
	15416.0	33.2	18.7	51.9	74.0	-22.1	Peak	Horizontal
	15416.0	26.7	18.7	45.4	54.0	-8.6	Average	Horizontal
*	9942.0	31.7	13.8	45.5	68.2	-22.7	Peak	Vertical
*	10265.0	30.8	14.6	45.4	68.2	-22.8	Peak	Vertical
	10970.5	30.0	16.2	46.2	74.0	-27.8	Peak	Vertical
	11531.5	32.0	17.3	49.3	74.0	-24.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9993.0	31.2	13.7	44.9	68.2	-23.3	Peak	Horizontal
*	10401.0	29.7	15.1	44.8	68.2	-23.4	Peak	Horizontal
	11455.0	31.2	17.4	48.6	74.0	-25.4	Peak	Horizontal
	12058.5	28.9	17.0	45.9	74.0	-28.1	Peak	Horizontal
*	9636.0	32.5	13.4	45.9	68.2	-22.3	Peak	Vertical
*	10214.0	30.2	14.3	44.5	68.2	-23.7	Peak	Vertical
	10783.5	30.0	16.1	46.1	74.0	-27.9	Peak	Vertical
	11480.5	30.7	17.6	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	31.1	13.5	44.6	68.2	-23.6	Peak	Horizontal
*	10401.0	30.5	15.1	45.6	68.2	-22.6	Peak	Horizontal
	11081.0	30.6	16.7	47.3	74.0	-26.7	Peak	Horizontal
	11633.5	29.0	17.7	46.7	74.0	-27.3	Peak	Horizontal
*	10035.5	30.4	13.9	44.3	68.2	-23.9	Peak	Vertical
*	10265.0	31.0	14.6	45.6	68.2	-22.6	Peak	Vertical
	11557.0	30.8	17.9	48.7	74.0	-25.3	Peak	Vertical
	11846.0	28.7	17.1	45.8	74.0	-28.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9721.0	32.0	13.5	45.5	68.2	-22.7	Peak	Horizontal
*	10307.5	30.3	14.9	45.2	68.2	-23.0	Peak	Horizontal
	10877.0	30.0	16.3	46.3	74.0	-27.7	Peak	Horizontal
	11574.0	31.8	17.7	49.5	74.0	-24.5	Peak	Horizontal
*	9636.0	31.0	13.4	44.4	68.2	-23.8	Peak	Vertical
*	10078.0	30.6	13.7	44.3	68.2	-23.9	Peak	Vertical
	11276.5	30.6	17.0	47.6	74.0	-26.4	Peak	Vertical
	11914.0	30.5	17.3	47.8	74.0	-26.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	31.8	13.5	45.3	68.2	-22.9	Peak	Horizontal
*	10350.0	31.5	15.2	46.7	68.2	-21.5	Peak	Horizontal
	11072.5	29.5	16.5	46.0	74.0	-28.0	Peak	Horizontal
	12313.5	32.1	17.4	49.5	74.0	-24.5	Peak	Horizontal
*	9814.5	31.2	13.7	44.9	68.2	-23.3	Peak	Vertical
*	10350.0	30.1	15.2	45.3	68.2	-22.9	Peak	Vertical
	11047.0	31.9	16.2	48.1	74.0	-25.9	Peak	Vertical
	11897.0	29.1	17.4	46.5	74.0	-27.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	30.3	13.8	44.1	68.2	-24.1	Peak	Horizontal
*	10307.5	29.1	14.9	44.0	68.2	-24.2	Peak	Horizontal
	11472.0	31.7	17.5	49.2	74.0	-24.8	Peak	Horizontal
	11897.0	29.6	17.4	47.0	74.0	-27.0	Peak	Horizontal
*	9661.5	33.1	13.5	46.6	68.2	-21.6	Peak	Vertical
*	10307.5	30.8	14.9	45.7	68.2	-22.5	Peak	Vertical
	11463.5	30.8	17.5	48.3	74.0	-25.7	Peak	Vertical
	12109.5	29.5	17.0	46.5	74.0	-27.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9636.0	31.4	13.4	44.8	68.2	-23.4	Peak	Horizontal
*	10120.5	29.9	14.1	44.0	68.2	-24.2	Peak	Horizontal
	10732.5	30.4	15.9	46.3	74.0	-27.7	Peak	Horizontal
	11489.0	30.3	17.7	48.0	74.0	-26.0	Peak	Horizontal
*	9636.0	31.5	13.4	44.9	68.2	-23.3	Peak	Vertical
*	10265.0	31.3	14.6	45.9	68.2	-22.3	Peak	Vertical
	11531.5	32.0	17.3	49.3	74.0	-24.7	Peak	Vertical
	12007.5	30.0	17.0	47.0	74.0	-27.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9678.5	30.9	13.5	44.4	68.2	-23.8	Peak	Horizontal
*	9942.0	30.2	13.8	44.0	68.2	-24.2	Peak	Horizontal
	10877.0	29.5	16.3	45.8	74.0	-28.2	Peak	Horizontal
	11506.0	31.4	17.4	48.8	74.0	-25.2	Peak	Horizontal
*	9772.0	30.5	13.5	44.0	68.2	-24.2	Peak	Vertical
*	10307.5	29.7	14.9	44.6	68.2	-23.6	Peak	Vertical
	11106.5	32.0	16.7	48.7	74.0	-25.3	Peak	Vertical
	12007.5	29.1	17.0	46.1	74.0	-27.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9721.0	31.9	13.5	45.4	68.2	-22.8	Peak	Horizontal
*	10171.5	31.3	14.1	45.4	68.2	-22.8	Peak	Horizontal
	11446.5	30.1	17.3	47.4	74.0	-26.6	Peak	Horizontal
	12058.5	29.8	17.0	46.8	74.0	-27.2	Peak	Horizontal
*	9772.0	31.9	13.5	45.4	68.2	-22.8	Peak	Vertical
*	10171.5	31.6	14.1	45.7	68.2	-22.5	Peak	Vertical
	11123.5	29.4	16.4	45.8	74.0	-28.2	Peak	Vertical
	12007.5	30.3	17.0	47.3	74.0	-26.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9678.5	31.2	13.5	44.7	68.2	-23.5	Peak	Horizontal
*	10307.5	30.8	14.9	45.7	68.2	-22.5	Peak	Horizontal
	11429.5	30.1	17.3	47.4	74.0	-26.6	Peak	Horizontal
	12007.5	29.7	17.0	46.7	74.0	-27.3	Peak	Horizontal
*	9857.0	30.8	13.5	44.3	68.2	-23.9	Peak	Vertical
*	10350.0	30.7	15.2	45.9	68.2	-22.3	Peak	Vertical
	10970.5	29.2	16.2	45.4	74.0	-28.6	Peak	Vertical
	11446.5	31.1	17.3	48.4	74.0	-25.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT80 – Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10035.5	30.6	13.9	44.5	68.2	-23.7	Peak	Horizontal
*	10401.0	29.9	15.1	45.0	68.2	-23.2	Peak	Horizontal
	11463.5	31.0	17.5	48.5	74.0	-25.5	Peak	Horizontal
	12007.5	29.7	17.0	46.7	74.0	-27.3	Peak	Horizontal
*	10401.0	29.6	15.1	44.7	68.2	-23.5	Peak	Vertical
	11480.5	30.0	17.6	47.6	74.0	-26.4	Peak	Vertical
	12058.5	30.1	17.0	47.1	74.0	-26.9	Peak	Vertical
*	14600.0	33.3	19.7	53.0	68.2	-15.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9593.5	31.1	13.3	44.4	68.2	-23.8	Peak	Horizontal
*	10078.0	30.8	13.7	44.5	68.2	-23.7	Peak	Horizontal
	10970.5	28.7	16.2	44.9	74.0	-29.1	Peak	Horizontal
	11480.5	30.7	17.6	48.3	74.0	-25.7	Peak	Horizontal
*	9593.5	31.6	13.3	44.9	68.2	-23.3	Peak	Vertical
*	10171.5	31.2	14.1	45.3	68.2	-22.9	Peak	Vertical
	11072.5	30.2	16.5	46.7	74.0	-27.3	Peak	Vertical
	11429.5	31.5	17.3	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT160 – Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	31.6	13.5	45.1	68.2	-23.1	Peak	Horizontal
*	10214.0	30.3	14.3	44.6	68.2	-23.6	Peak	Horizontal
	11098.0	32.0	16.8	48.8	74.0	-25.2	Peak	Horizontal
	11846.0	29.3	17.1	46.4	74.0	-27.6	Peak	Horizontal
*	9814.5	31.6	13.7	45.3	68.2	-22.9	Peak	Vertical
*	10307.5	29.6	14.9	44.5	68.2	-23.7	Peak	Vertical
	11191.5	31.6	16.9	48.5	74.0	-25.5	Peak	Vertical
	11846.0	30.9	17.1	48.0	74.0	-26.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ac-VHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10078.0	30.5	13.7	44.2	68.2	-24.0	Peak	Horizontal
*	10443.5	30.7	15.5	46.2	68.2	-22.0	Peak	Horizontal
	11276.5	29.5	17.0	46.5	74.0	-27.5	Peak	Horizontal
	11931.0	32.3	17.0	49.3	74.0	-24.7	Peak	Horizontal
*	9678.5	30.9	13.5	44.4	68.2	-23.8	Peak	Vertical
*	10443.5	30.0	15.5	45.5	68.2	-22.7	Peak	Vertical
	11098.0	31.4	16.8	48.2	74.0	-25.8	Peak	Vertical
	11480.5	29.4	17.6	47.0	74.0	-27.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE20 – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9899.5	31.1	13.6	44.7	68.2	-23.5	Peak	Horizontal
*	10214.0	30.9	14.3	45.2	68.2	-23.0	Peak	Horizontal
	11225.5	30.8	16.9	47.7	74.0	-26.3	Peak	Horizontal
	11633.5	30.1	17.7	47.8	74.0	-26.2	Peak	Horizontal
*	9721.0	31.7	13.5	45.2	68.2	-23.0	Peak	Vertical
*	10214.0	30.7	14.3	45.0	68.2	-23.2	Peak	Vertical
	11276.5	29.7	17.0	46.7	74.0	-27.3	Peak	Vertical
	11897.0	29.2	17.4	46.6	74.0	-27.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE20 – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	31.3	13.5	44.8	68.2	-23.4	Peak	Horizontal
*	10214.0	30.4	14.3	44.7	68.2	-23.5	Peak	Horizontal
	11225.5	30.0	16.9	46.9	74.0	-27.1	Peak	Horizontal
	12058.5	29.4	17.0	46.4	74.0	-27.6	Peak	Horizontal
*	10120.5	30.0	14.1	44.1	68.2	-24.1	Peak	Vertical
*	10443.5	31.1	15.5	46.6	68.2	-21.6	Peak	Vertical
	11225.5	28.8	16.9	45.7	74.0	-28.3	Peak	Vertical
	11565.5	32.0	17.8	49.8	74.0	-24.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE20 – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	31.6	13.7	45.3	68.2	-22.9	Peak	Horizontal
*	10214.0	30.6	14.3	44.9	68.2	-23.3	Peak	Horizontal
	11429.5	29.1	17.3	46.4	74.0	-27.6	Peak	Horizontal
	12109.5	29.3	17.0	46.3	74.0	-27.7	Peak	Horizontal
*	9814.5	30.9	13.7	44.6	68.2	-23.6	Peak	Vertical
*	10171.5	31.7	14.1	45.8	68.2	-22.4	Peak	Vertical
	11506.0	32.3	17.4	49.7	74.0	-24.3	Peak	Vertical
	11786.5	29.9	17.6	47.5	74.0	-26.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10171.5	30.2	14.1	44.3	68.2	-23.9	Peak	Horizontal
*	10443.5	29.3	15.5	44.8	68.2	-23.4	Peak	Horizontal
	11174.5	29.4	17.0	46.4	74.0	-27.6	Peak	Horizontal
	11718.5	31.0	17.8	48.8	74.0	-25.2	Peak	Horizontal
*	9899.5	31.9	13.6	45.5	68.2	-22.7	Peak	Vertical
*	10307.5	30.2	14.9	45.1	68.2	-23.1	Peak	Vertical
	11021.5	30.1	16.4	46.5	74.0	-27.5	Peak	Vertical
	11531.5	31.2	17.3	48.5	74.0	-25.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9993.0	31.3	13.7	45.0	68.2	-23.2	Peak	Horizontal
*	10401.0	29.0	15.1	44.1	68.2	-24.1	Peak	Horizontal
	11276.5	29.3	17.0	46.3	74.0	-27.7	Peak	Horizontal
	12441.0	29.8	16.6	46.4	74.0	-27.6	Peak	Horizontal
*	9993.0	31.3	13.7	45.0	68.2	-23.2	Peak	Vertical
*	10171.5	30.1	14.1	44.2	68.2	-24.0	Peak	Vertical
	11225.5	29.1	16.9	46.0	74.0	-28.0	Peak	Vertical
	11897.0	28.6	17.4	46.0	74.0	-28.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9993.0	30.6	13.7	44.3	68.2	-23.9	Peak	Horizontal
*	10171.5	30.9	14.1	45.0	68.2	-23.2	Peak	Horizontal
	11174.5	29.5	17.0	46.5	74.0	-27.5	Peak	Horizontal
	11633.5	28.3	17.7	46.0	74.0	-28.0	Peak	Horizontal
*	9993.0	30.7	13.7	44.4	68.2	-23.8	Peak	Vertical
*	10307.5	30.5	14.9	45.4	68.2	-22.8	Peak	Vertical
	11378.5	28.9	17.3	46.2	74.0	-27.8	Peak	Vertical
	12058.5	28.9	17.0	45.9	74.0	-28.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10171.5	32.2	14.1	46.3	68.2	-21.9	Peak	Horizontal
*	10588.0	29.6	15.5	45.1	68.2	-23.1	Peak	Horizontal
	11225.5	29.4	16.9	46.3	74.0	-27.7	Peak	Horizontal
	11582.5	29.1	17.5	46.6	74.0	-27.4	Peak	Horizontal
*	9857.0	31.5	13.5	45.0	68.2	-23.2	Peak	Vertical
*	10307.5	29.7	14.9	44.6	68.2	-23.6	Peak	Vertical
	10970.5	29.9	16.2	46.1	74.0	-27.9	Peak	Vertical
	11480.5	31.2	17.6	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9721.0	31.2	13.5	44.7	68.2	-23.5	Peak	Horizontal
*	10035.5	30.6	13.9	44.5	68.2	-23.7	Peak	Horizontal
	10775.0	33.1	15.9	49.0	74.0	-25.0	Peak	Horizontal
	11072.5	30.5	16.5	47.0	74.0	-27.0	Peak	Horizontal
*	9814.5	32.4	13.7	46.1	68.2	-22.1	Peak	Vertical
*	10350.0	30.5	15.2	45.7	68.2	-22.5	Peak	Vertical
	11404.0	31.1	17.5	48.6	74.0	-25.4	Peak	Vertical
	11735.5	29.3	17.7	47.0	74.0	-27.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	32.6	13.8	46.4	68.2	-21.8	Peak	Horizontal
*	10307.5	30.2	14.9	45.1	68.2	-23.1	Peak	Horizontal
	10877.0	28.9	16.3	45.2	74.0	-28.8	Peak	Horizontal
	11429.5	30.1	17.3	47.4	74.0	-26.6	Peak	Horizontal
*	9857.0	30.9	13.5	44.4	68.2	-23.8	Peak	Vertical
	11633.5	29.5	17.7	47.2	74.0	-26.8	Peak	Vertical
	12500.5	29.5	16.5	46.0	74.0	-28.0	Peak	Vertical
*	13631.0	31.7	19.1	50.8	68.2	-17.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	30.5	13.5	44.0	68.2	-24.2	Peak	Horizontal
	12220.0	29.0	17.5	46.5	74.0	-27.5	Peak	Horizontal
*	13792.5	28.9	18.8	47.7	68.2	-20.5	Peak	Horizontal
	15968.5	33.0	17.5	50.5	74.0	-23.5	Peak	Horizontal
*	10307.5	30.3	14.9	45.2	68.2	-23.0	Peak	Vertical
	11497.5	30.4	17.6	48.0	74.0	-26.0	Peak	Vertical
	12271.0	29.2	17.3	46.5	74.0	-27.5	Peak	Vertical
*	16912.0	32.0	21.7	53.7	68.2	-14.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9636.0	31.2	13.4	44.6	68.2	-23.6	Peak	Horizontal
*	9942.0	30.6	13.8	44.4	68.2	-23.8	Peak	Horizontal
	10732.5	30.0	15.9	45.9	74.0	-28.1	Peak	Horizontal
	11429.5	30.0	17.3	47.3	74.0	-26.7	Peak	Horizontal
*	9636.0	31.9	13.4	45.3	68.2	-22.9	Peak	Vertical
*	10035.5	30.5	13.9	44.4	68.2	-23.8	Peak	Vertical
	11480.5	31.5	17.6	49.1	74.0	-24.9	Peak	Vertical
	12109.5	29.4	17.0	46.4	74.0	-27.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE20 – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9636.0	32.2	13.4	45.6	68.2	-22.6	Peak	Horizontal
*	10120.5	30.9	14.1	45.0	68.2	-23.2	Peak	Horizontal
	11098.0	31.4	16.8	48.2	74.0	-25.8	Peak	Horizontal
	11455.0	31.2	17.4	48.6	74.0	-25.4	Peak	Horizontal
*	10078.0	30.5	13.7	44.2	68.2	-24.0	Peak	Vertical
*	10265.0	29.9	14.6	44.5	68.2	-23.7	Peak	Vertical
	11455.0	31.2	17.4	48.6	74.0	-25.4	Peak	Vertical
	11684.5	29.6	17.3	46.9	74.0	-27.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE20 – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	29.9	13.5	43.4	68.2	-24.8	Peak	Horizontal
*	10265.0	30.4	14.6	45.0	68.2	-23.2	Peak	Horizontal
	11472.0	32.1	17.5	49.6	74.0	-24.4	Peak	Horizontal
	11846.0	28.5	17.1	45.6	74.0	-28.4	Peak	Horizontal
*	9857.0	31.2	13.5	44.7	68.2	-23.5	Peak	Vertical
*	10120.5	30.0	14.1	44.1	68.2	-24.1	Peak	Vertical
	11378.5	28.4	17.3	45.7	74.0	-28.3	Peak	Vertical
	11854.5	31.8	17.2	49.0	74.0	-25.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9636.0	31.3	13.4	44.7	68.2	-23.5	Peak	Horizontal
*	10078.0	31.2	13.7	44.9	68.2	-23.3	Peak	Horizontal
	10732.5	29.9	15.9	45.8	74.0	-28.2	Peak	Horizontal
	11276.5	29.6	17.0	46.6	74.0	-27.4	Peak	Horizontal
*	9942.0	32.2	13.8	46.0	68.2	-22.2	Peak	Vertical
*	10443.5	30.2	15.5	45.7	68.2	-22.5	Peak	Vertical
	11480.5	29.7	17.6	47.3	74.0	-26.7	Peak	Vertical
	11914.0	31.8	17.3	49.1	74.0	-24.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	32.2	13.8	46.0	68.2	-22.2	Peak	Horizontal
*	10350.0	30.2	15.2	45.4	68.2	-22.8	Peak	Horizontal
	11429.5	29.0	17.3	46.3	74.0	-27.7	Peak	Horizontal
	12109.5	28.6	17.0	45.6	74.0	-28.4	Peak	Horizontal
*	10035.5	30.3	13.9	44.2	68.2	-24.0	Peak	Vertical
*	10443.5	29.8	15.5	45.3	68.2	-22.9	Peak	Vertical
	11225.5	29.5	16.9	46.4	74.0	-27.6	Peak	Vertical
	12109.5	28.6	17.0	45.6	74.0	-28.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9721.0	30.9	13.5	44.4	68.2	-23.8	Peak	Horizontal
*	10401.0	31.0	15.1	46.1	68.2	-22.1	Peak	Horizontal
	11489.0	31.1	17.7	48.8	74.0	-25.2	Peak	Horizontal
	11786.5	29.3	17.6	46.9	74.0	-27.1	Peak	Horizontal
*	10078.0	30.8	13.7	44.5	68.2	-23.7	Peak	Vertical
*	10350.0	30.6	15.2	45.8	68.2	-22.4	Peak	Vertical
	11276.5	28.7	17.0	45.7	74.0	-28.3	Peak	Vertical
	11489.0	30.6	17.7	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9721.0	31.2	13.5	44.7	68.2	-23.5	Peak	Horizontal
*	10307.5	30.2	14.9	45.1	68.2	-23.1	Peak	Horizontal
	11489.0	30.5	17.7	48.2	74.0	-25.8	Peak	Horizontal
	11846.0	29.5	17.1	46.6	74.0	-27.4	Peak	Horizontal
*	9942.0	30.9	13.8	44.7	68.2	-23.5	Peak	Vertical
*	10265.0	32.6	14.6	47.2	68.2	-21.0	Peak	Vertical
	11072.5	30.4	16.5	46.9	74.0	-27.1	Peak	Vertical
	11565.5	30.8	17.8	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	31.1	13.7	44.8	68.2	-23.4	Peak	Horizontal
*	10120.5	29.9	14.1	44.0	68.2	-24.2	Peak	Horizontal
	10783.5	30.8	16.1	46.9	74.0	-27.1	Peak	Horizontal
	11557.0	30.7	17.9	48.6	74.0	-25.4	Peak	Horizontal
*	9772.0	30.6	13.5	44.1	68.2	-24.1	Peak	Vertical
*	10350.0	30.0	15.2	45.2	68.2	-23.0	Peak	Vertical
	10928.0	29.4	16.7	46.1	74.0	-27.9	Peak	Vertical
	11514.5	30.6	17.3	47.9	74.0	-26.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	30.9	13.8	44.7	68.2	-23.5	Peak	Horizontal
*	10307.5	29.6	14.9	44.5	68.2	-23.7	Peak	Horizontal
	11472.0	31.1	17.5	48.6	74.0	-25.4	Peak	Horizontal
	11846.0	29.2	17.1	46.3	74.0	-27.7	Peak	Horizontal
*	9678.5	31.8	13.5	45.3	68.2	-22.9	Peak	Vertical
*	10078.0	32.3	13.7	46.0	68.2	-22.2	Peak	Vertical
	10885.5	32.2	16.3	48.5	74.0	-25.5	Peak	Vertical
	11225.5	29.2	16.9	46.1	74.0	-27.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10086.5	32.1	13.8	45.9	68.2	-22.3	Peak	Horizontal
*	10401.0	30.6	15.1	45.7	68.2	-22.5	Peak	Horizontal
	11081.0	32.3	16.7	49.0	74.0	-25.0	Peak	Horizontal
	11429.5	29.8	17.3	47.1	74.0	-26.9	Peak	Horizontal
*	9738.0	32.9	13.5	46.4	68.2	-21.8	Peak	Vertical
*	10214.0	30.4	14.3	44.7	68.2	-23.5	Peak	Vertical
	11480.5	31.2	17.6	48.8	74.0	-25.2	Peak	Vertical
	11948.0	29.7	16.9	46.6	74.0	-27.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9678.5	31.2	13.5	44.7	68.2	-23.5	Peak	Horizontal
*	10171.5	31.4	14.1	45.5	68.2	-22.7	Peak	Horizontal
	11081.0	31.7	16.7	48.4	74.0	-25.6	Peak	Horizontal
	11582.5	29.3	17.5	46.8	74.0	-27.2	Peak	Horizontal
*	10035.5	30.9	13.9	44.8	68.2	-23.4	Peak	Vertical
*	10443.5	30.4	15.5	45.9	68.2	-22.3	Peak	Vertical
	11030.0	31.4	16.2	47.6	74.0	-26.4	Peak	Vertical
	11429.5	29.6	17.3	46.9	74.0	-27.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9806.0	33.8	13.8	47.6	68.2	-20.6	Peak	Horizontal
*	10035.5	30.9	13.9	44.8	68.2	-23.4	Peak	Horizontal
	10639.0	30.1	15.4	45.5	74.0	-28.5	Peak	Horizontal
	11378.5	28.7	17.3	46.0	74.0	-28.0	Peak	Horizontal
*	9814.5	32.2	13.7	45.9	68.2	-22.3	Peak	Vertical
*	9942.0	30.5	13.8	44.3	68.2	-23.9	Peak	Vertical
	11123.5	29.7	16.4	46.1	74.0	-27.9	Peak	Vertical
	11574.0	30.7	17.7	48.4	74.0	-25.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	31.4	13.7	45.1	68.2	-23.1	Peak	Horizontal
*	10307.5	30.0	14.9	44.9	68.2	-23.3	Peak	Horizontal
	10970.5	30.5	16.2	46.7	74.0	-27.3	Peak	Horizontal
	11591.0	32.1	17.3	49.4	74.0	-24.6	Peak	Horizontal
*	9899.5	30.9	13.6	44.5	68.2	-23.7	Peak	Vertical
*	10214.0	31.3	14.3	45.6	68.2	-22.6	Peak	Vertical
	11523.0	30.8	17.2	48.0	74.0	-26.0	Peak	Vertical
	12271.0	29.2	17.3	46.5	74.0	-27.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE80 – Channel 42
Remark	3. Average measurement was not performed if peak level lower than average limit. 4. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	32.3	13.5	45.8	68.2	-22.4	Peak	Horizontal
*	10265.0	31.3	14.6	45.9	68.2	-22.3	Peak	Horizontal
	11327.5	30.0	17.4	47.4	74.0	-26.6	Peak	Horizontal
	11633.5	30.8	17.7	48.5	74.0	-25.5	Peak	Horizontal
*	9857.0	32.3	13.5	45.8	68.2	-22.4	Peak	Vertical
*	10171.5	31.2	14.1	45.3	68.2	-22.9	Peak	Vertical
	11548.5	31.9	17.7	49.6	74.0	-24.4	Peak	Vertical
	12109.5	30.5	17.0	47.5	74.0	-26.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10035.5	30.6	13.9	44.5	68.2	-23.7	Peak	Horizontal
*	10443.5	30.4	15.5	45.9	68.2	-22.3	Peak	Horizontal
	11523.0	31.4	17.2	48.6	74.0	-25.4	Peak	Horizontal
	12109.5	30.5	17.0	47.5	74.0	-26.5	Peak	Horizontal
*	10494.5	29.8	15.4	45.2	68.2	-23.0	Peak	Vertical
	11276.5	28.7	17.0	45.7	74.0	-28.3	Peak	Vertical
	11897.0	29.3	17.4	46.7	74.0	-27.3	Peak	Vertical
*	14217.5	33.2	19.9	53.1	68.2	-15.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9593.5	32.0	13.3	45.3	68.2	-22.9	Peak	Horizontal
*	10035.5	31.4	13.9	45.3	68.2	-22.9	Peak	Horizontal
	11276.5	28.7	17.0	45.7	74.0	-28.3	Peak	Horizontal
	11786.5	29.9	17.6	47.5	74.0	-26.5	Peak	Horizontal
*	9993.0	30.8	13.7	44.5	68.2	-23.7	Peak	Vertical
*	10401.0	29.6	15.1	44.7	68.2	-23.5	Peak	Vertical
	11438.0	31.0	17.2	48.2	74.0	-25.8	Peak	Vertical
	11786.5	30.7	17.6	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9993.0	30.3	13.7	44.0	68.2	-24.2	Peak	Horizontal
*	10171.5	31.0	14.1	45.1	68.2	-23.1	Peak	Horizontal
	11089.5	32.7	16.8	49.5	74.0	-24.5	Peak	Horizontal
	11497.5	31.8	17.6	49.4	74.0	-24.6	Peak	Horizontal
*	9993.0	30.9	13.7	44.6	68.2	-23.6	Peak	Vertical
*	10443.5	29.9	15.5	45.4	68.2	-22.8	Peak	Vertical
	10970.5	29.6	16.2	45.8	74.0	-28.2	Peak	Vertical
	11497.5	31.8	17.6	49.4	74.0	-24.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE80 – Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	30.0	13.5	43.5	68.2	-24.7	Peak	Horizontal
*	10265.0	30.7	14.6	45.3	68.2	-22.9	Peak	Horizontal
	11021.5	30.7	16.4	47.1	74.0	-26.9	Peak	Horizontal
	11540.0	31.1	17.6	48.7	74.0	-25.3	Peak	Horizontal
*	10035.5	31.0	13.9	44.9	68.2	-23.3	Peak	Vertical
*	10401.0	30.3	15.1	45.4	68.2	-22.8	Peak	Vertical
	11429.5	29.7	17.3	47.0	74.0	-27.0	Peak	Vertical
	11897.0	31.2	17.4	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9636.0	33.0	13.4	46.4	68.2	-21.8	Peak	Horizontal
*	10171.5	30.3	14.1	44.4	68.2	-23.8	Peak	Horizontal
	10826.0	30.4	16.4	46.8	74.0	-27.2	Peak	Horizontal
	11531.5	30.6	17.3	47.9	74.0	-26.1	Peak	Horizontal
*	9636.0	33.0	13.4	46.4	68.2	-21.8	Peak	Vertical
*	9993.0	31.1	13.7	44.8	68.2	-23.4	Peak	Vertical
	11174.5	28.7	17.0	45.7	74.0	-28.3	Peak	Vertical
	11829.0	31.2	17.4	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE160 – Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9593.5	31.0	13.3	44.3	68.2	-23.9	Peak	Horizontal
*	10214.0	30.8	14.3	45.1	68.2	-23.1	Peak	Horizontal
	10970.5	30.0	16.2	46.2	74.0	-27.8	Peak	Horizontal
	11429.5	29.6	17.3	46.9	74.0	-27.1	Peak	Horizontal
*	9678.5	32.4	13.5	45.9	68.2	-22.3	Peak	Vertical
*	10120.5	31.3	14.1	45.4	68.2	-22.8	Peak	Vertical
	10851.5	31.9	16.5	48.4	74.0	-25.6	Peak	Vertical
	11846.0	30.1	17.1	47.2	74.0	-26.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11ax-HE160 – Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	30.8	13.5	44.3	68.2	-23.9	Peak	Horizontal
*	10171.5	31.2	14.1	45.3	68.2	-22.9	Peak	Horizontal
	11072.5	29.8	16.5	46.3	74.0	-27.7	Peak	Horizontal
	11710.0	30.2	17.8	48.0	74.0	-26.0	Peak	Horizontal
*	9899.5	31.7	13.6	45.3	68.2	-22.9	Peak	Vertical
*	10401.0	29.0	15.1	44.1	68.2	-24.1	Peak	Vertical
	11276.5	28.2	17.0	45.2	74.0	-28.8	Peak	Vertical
	11523.0	31.4	17.2	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT20 – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	31.3	13.7	45.0	68.2	-23.2	Peak	Horizontal
*	10078.0	31.5	13.7	45.2	68.2	-23.0	Peak	Horizontal
	11098.0	32.0	16.8	48.8	74.0	-25.2	Peak	Horizontal
	11735.5	29.1	17.7	46.8	74.0	-27.2	Peak	Horizontal
*	9721.0	31.7	13.5	45.2	68.2	-23.0	Peak	Vertical
*	10265.0	31.2	14.6	45.8	68.2	-22.4	Peak	Vertical
	11021.5	30.3	16.4	46.7	74.0	-27.3	Peak	Vertical
	11557.0	32.6	17.9	50.5	74.0	-23.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT20 – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	31.3	13.7	45.0	68.2	-23.2	Peak	Horizontal
*	10401.0	30.8	15.1	45.9	68.2	-22.3	Peak	Horizontal
	10826.0	31.8	16.4	48.2	74.0	-25.8	Peak	Horizontal
	11174.5	30.3	17.0	47.3	74.0	-26.7	Peak	Horizontal
*	9814.5	31.3	13.7	45.0	68.2	-23.2	Peak	Vertical
	11684.5	29.0	17.3	46.3	74.0	-27.7	Peak	Vertical
	12058.5	28.9	17.0	45.9	74.0	-28.1	Peak	Vertical
*	14353.5	32.2	20.3	52.5	68.2	-15.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT20 – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9678.5	31.0	13.5	44.5	68.2	-23.7	Peak	Horizontal
*	10078.0	30.5	13.7	44.2	68.2	-24.0	Peak	Horizontal
	11021.5	29.9	16.4	46.3	74.0	-27.7	Peak	Horizontal
	11540.0	31.0	17.6	48.6	74.0	-25.4	Peak	Horizontal
*	9814.5	31.5	13.7	45.2	68.2	-23.0	Peak	Vertical
*	10120.5	31.0	14.1	45.1	68.2	-23.1	Peak	Vertical
	11480.5	30.8	17.6	48.4	74.0	-25.6	Peak	Vertical
	12109.5	29.6	17.0	46.6	74.0	-27.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9721.0	31.1	13.5	44.6	68.2	-23.6	Peak	Horizontal
*	10171.5	30.5	14.1	44.6	68.2	-23.6	Peak	Horizontal
	10877.0	31.3	16.3	47.6	74.0	-26.4	Peak	Horizontal
	11531.5	29.6	17.3	46.9	74.0	-27.1	Peak	Horizontal
*	9721.0	31.1	13.5	44.6	68.2	-23.6	Peak	Vertical
*	10443.5	31.5	15.5	47.0	68.2	-21.2	Peak	Vertical
	10970.5	31.3	16.2	47.5	74.0	-26.5	Peak	Vertical
	11480.5	30.7	17.6	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9993.0	31.0	13.7	44.7	68.2	-23.5	Peak	Horizontal
*	10307.5	30.2	14.9	45.1	68.2	-23.1	Peak	Horizontal
	10970.5	30.1	16.2	46.3	74.0	-27.7	Peak	Horizontal
	11463.5	31.6	17.5	49.1	74.0	-24.9	Peak	Horizontal
*	9993.0	31.0	13.7	44.7	68.2	-23.5	Peak	Vertical
*	10214.0	30.3	14.3	44.6	68.2	-23.6	Peak	Vertical
	11540.0	31.4	17.6	49.0	74.0	-25.0	Peak	Vertical
	12237.0	31.5	17.5	49.0	74.0	-25.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10120.5	30.5	14.1	44.6	68.2	-23.6	Peak	Horizontal
*	10401.0	30.5	15.1	45.6	68.2	-22.6	Peak	Horizontal
	10945.0	31.6	16.4	48.0	74.0	-26.0	Peak	Horizontal
	11276.5	29.3	17.0	46.3	74.0	-27.7	Peak	Horizontal
*	9721.0	31.2	13.5	44.7	68.2	-23.5	Peak	Vertical
*	10120.5	30.5	14.1	44.6	68.2	-23.6	Peak	Vertical
	11557.0	31.1	17.9	49.0	74.0	-25.0	Peak	Vertical
	12398.5	32.0	16.6	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	31.6	13.8	45.4	68.2	-22.8	Peak	Horizontal
*	10265.0	30.9	14.6	45.5	68.2	-22.7	Peak	Horizontal
	11072.5	30.3	16.5	46.8	74.0	-27.2	Peak	Horizontal
	11565.5	31.5	17.8	49.3	74.0	-24.7	Peak	Horizontal
*	9942.0	31.6	13.8	45.4	68.2	-22.8	Peak	Vertical
*	10443.5	29.9	15.5	45.4	68.2	-22.8	Peak	Vertical
	10928.0	30.3	16.7	47.0	74.0	-27.0	Peak	Vertical
	11480.5	29.3	17.6	46.9	74.0	-27.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10035.5	31.5	13.9	45.4	68.2	-22.8	Peak	Horizontal
*	10443.5	29.9	15.5	45.4	68.2	-22.8	Peak	Horizontal
	11421.0	30.9	17.4	48.3	74.0	-25.7	Peak	Horizontal
	11735.5	29.2	17.7	46.9	74.0	-27.1	Peak	Horizontal
*	9942.0	31.4	13.8	45.2	68.2	-23.0	Peak	Vertical
*	10401.0	30.8	15.1	45.9	68.2	-22.3	Peak	Vertical
	11421.0	30.9	17.4	48.3	74.0	-25.7	Peak	Vertical
	11897.0	29.2	17.4	46.6	74.0	-27.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	31.4	13.8	45.2	68.2	-23.0	Peak	Horizontal
	11072.5	29.8	16.5	46.3	74.0	-27.7	Peak	Horizontal
	11735.5	29.0	17.7	46.7	74.0	-27.3	Peak	Horizontal
*	17107.5	33.1	21.8	54.9	68.2	-13.3	Peak	Horizontal
*	9857.0	30.7	13.5	44.2	68.2	-24.0	Peak	Vertical
*	10214.0	30.5	14.3	44.8	68.2	-23.4	Peak	Vertical
	11021.5	29.5	16.4	45.9	74.0	-28.1	Peak	Vertical
	11795.0	30.7	17.7	48.4	74.0	-25.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10171.5	31.0	14.1	45.1	68.2	-23.1	Peak	Horizontal
	11327.5	28.8	17.4	46.2	74.0	-27.8	Peak	Horizontal
	11795.0	30.7	17.7	48.4	74.0	-25.6	Peak	Horizontal
*	17158.5	34.0	22.1	56.1	68.2	-12.1	Peak	Horizontal
*	9508.5	30.3	13.4	43.7	68.2	-24.5	Peak	Vertical
*	10214.0	30.4	14.3	44.7	68.2	-23.5	Peak	Vertical
	11081.0	31.8	16.7	48.5	74.0	-25.5	Peak	Vertical
	11761.0	31.6	17.3	48.9	74.0	-25.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	30.4	13.5	43.9	68.2	-24.3	Peak	Horizontal
*	10120.5	30.3	14.1	44.4	68.2	-23.8	Peak	Horizontal
	10877.0	29.8	16.3	46.1	74.0	-27.9	Peak	Horizontal
	11557.0	31.5	17.9	49.4	74.0	-24.6	Peak	Horizontal
*	9772.0	30.4	13.5	43.9	68.2	-24.3	Peak	Vertical
*	9942.0	29.7	13.8	43.5	68.2	-24.7	Peak	Vertical
	11166.0	32.0	17.0	49.0	74.0	-25.0	Peak	Vertical
	11557.0	31.3	17.9	49.2	74.0	-24.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT20 – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	30.8	13.5	44.3	68.2	-23.9	Peak	Horizontal
*	10214.0	30.4	14.3	44.7	68.2	-23.5	Peak	Horizontal
	11021.5	29.4	16.4	45.8	74.0	-28.2	Peak	Horizontal
	11684.5	29.9	17.3	47.2	74.0	-26.8	Peak	Horizontal
*	9721.0	30.9	13.5	44.4	68.2	-23.8	Peak	Vertical
*	10265.0	30.4	14.6	45.0	68.2	-23.2	Peak	Vertical
	10970.5	29.2	16.2	45.4	74.0	-28.6	Peak	Vertical
	11548.5	31.1	17.7	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT20 – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10401.0	30.2	15.1	45.3	68.2	-22.9	Peak	Horizontal
	11489.0	31.0	17.7	48.7	74.0	-25.3	Peak	Horizontal
	11735.5	29.1	17.7	46.8	74.0	-27.2	Peak	Horizontal
*	17473.0	32.9	23.9	56.8	68.2	-11.4	Peak	Horizontal
*	9721.0	31.2	13.5	44.7	68.2	-23.5	Peak	Vertical
*	9993.0	30.5	13.7	44.2	68.2	-24.0	Peak	Vertical
	10970.5	29.9	16.2	46.1	74.0	-27.9	Peak	Vertical
	11684.5	29.6	17.3	46.9	74.0	-27.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10307.5	31.0	14.9	45.9	68.2	-22.3	Peak	Horizontal
	11072.5	30.3	16.5	46.8	74.0	-27.2	Peak	Horizontal
	11735.5	28.9	17.7	46.6	74.0	-27.4	Peak	Horizontal
*	14821.0	32.8	19.6	52.4	68.2	-15.8	Peak	Horizontal
*	9993.0	31.5	13.7	45.2	68.2	-23.0	Peak	Vertical
*	10443.5	30.7	15.5	46.2	68.2	-22.0	Peak	Vertical
	11166.0	32.3	17.0	49.3	74.0	-24.7	Peak	Vertical
	11786.5	29.9	17.6	47.5	74.0	-26.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9593.5	32.4	13.3	45.7	68.2	-22.5	Peak	Horizontal
*	9993.0	31.1	13.7	44.8	68.2	-23.4	Peak	Horizontal
	11123.5	30.2	16.4	46.6	74.0	-27.4	Peak	Horizontal
	11633.5	30.1	17.7	47.8	74.0	-26.2	Peak	Horizontal
*	10307.5	30.0	14.9	44.9	68.2	-23.3	Peak	Vertical
	11565.5	31.6	17.8	49.4	74.0	-24.6	Peak	Vertical
	12228.5	31.6	17.5	49.1	74.0	-24.9	Peak	Vertical
*	14081.5	31.1	19.5	50.6	68.2	-17.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	30.5	13.5	44.0	68.2	-24.2	Peak	Horizontal
*	10120.5	31.1	14.1	45.2	68.2	-23.0	Peak	Horizontal
	11489.0	31.4	17.7	49.1	74.0	-24.9	Peak	Horizontal
	11948.0	29.3	16.9	46.2	74.0	-27.8	Peak	Horizontal
*	10214.0	30.6	14.3	44.9	68.2	-23.3	Peak	Vertical
*	10588.0	30.5	15.5	46.0	68.2	-22.2	Peak	Vertical
	11021.5	30.1	16.4	46.5	74.0	-27.5	Peak	Vertical
	11565.5	31.0	17.8	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	31.0	13.5	44.5	68.2	-23.7	Peak	Horizontal
*	10265.0	31.5	14.6	46.1	68.2	-22.1	Peak	Horizontal
	11123.5	30.2	16.4	46.6	74.0	-27.4	Peak	Horizontal
	11625.0	30.5	17.6	48.1	74.0	-25.9	Peak	Horizontal
*	9772.0	31.5	13.5	45.0	68.2	-23.2	Peak	Vertical
*	10120.5	31.0	14.1	45.1	68.2	-23.1	Peak	Vertical
	11021.5	29.9	16.4	46.3	74.0	-27.7	Peak	Vertical
	11565.5	29.9	17.8	47.7	74.0	-26.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10401.0	31.4	15.1	46.5	68.2	-21.7	Peak	Horizontal
	11072.5	30.5	16.5	47.0	74.0	-27.0	Peak	Horizontal
	11582.5	31.1	17.5	48.6	74.0	-25.4	Peak	Horizontal
*	17634.5	32.0	25.2	57.2	68.2	-11.0	Peak	Horizontal
*	9942.0	31.4	13.8	45.2	68.2	-23.0	Peak	Vertical
	10826.0	30.3	16.4	46.7	74.0	-27.3	Peak	Vertical
	11497.5	31.5	17.6	49.1	74.0	-24.9	Peak	Vertical
*	13852.0	29.3	19.0	48.3	68.2	-19.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	10078.0	30.7	13.7	44.4	68.2	-23.8	Peak	Horizontal
	11327.5	29.2	17.4	46.6	74.0	-27.4	Peak	Horizontal
	12288.0	30.4	17.6	48.0	74.0	-26.0	Peak	Horizontal
*	16776.0	31.7	20.6	52.3	68.2	-15.9	Peak	Horizontal
*	10078.0	30.6	13.7	44.3	68.2	-23.9	Peak	Vertical
	11557.0	31.5	17.9	49.4	74.0	-24.6	Peak	Vertical
	12169.0	28.6	17.4	46.0	74.0	-28.0	Peak	Vertical
*	13427.0	28.7	18.6	47.3	68.2	-20.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10171.5	31.6	14.1	45.7	68.2	-22.5	Peak	Horizontal
	11327.5	29.0	17.4	46.4	74.0	-27.6	Peak	Horizontal
	11786.5	29.6	17.6	47.2	74.0	-26.8	Peak	Horizontal
*	17481.5	32.2	23.8	56.0	68.2	-12.2	Peak	Horizontal
*	9942.0	31.2	13.8	45.0	68.2	-23.2	Peak	Vertical
*	10443.5	30.4	15.5	45.9	68.2	-22.3	Peak	Vertical
	11072.5	29.5	16.5	46.0	74.0	-28.0	Peak	Vertical
	11489.0	30.2	17.7	47.9	74.0	-26.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9593.5	31.7	13.3	45.0	68.2	-23.2	Peak	Horizontal
*	10035.5	31.6	13.9	45.5	68.2	-22.7	Peak	Horizontal
	10681.5	30.6	16.3	46.9	74.0	-27.1	Peak	Horizontal
	11591.0	31.9	17.3	49.2	74.0	-24.8	Peak	Horizontal
*	9772.0	30.6	13.5	44.1	68.2	-24.1	Peak	Vertical
	11429.5	29.3	17.3	46.6	74.0	-27.4	Peak	Vertical
	11846.0	30.1	17.1	47.2	74.0	-26.8	Peak	Vertical
*	13580.0	32.2	18.9	51.1	68.2	-17.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9899.5	31.0	13.6	44.6	68.2	-23.6	Peak	Horizontal
*	10035.5	31.5	13.9	45.4	68.2	-22.8	Peak	Horizontal
	11123.5	29.4	16.4	45.8	74.0	-28.2	Peak	Horizontal
	11684.5	29.9	17.3	47.2	74.0	-26.8	Peak	Horizontal
*	9772.0	32.1	13.5	45.6	68.2	-22.6	Peak	Vertical
*	10265.0	32.0	14.6	46.6	68.2	-21.6	Peak	Vertical
	11276.5	30.8	17.0	47.8	74.0	-26.2	Peak	Vertical
	12364.5	32.9	16.9	49.8	74.0	-24.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	30.9	13.7	44.6	68.2	-23.6	Peak	Horizontal
*	10120.5	30.5	14.1	44.6	68.2	-23.6	Peak	Horizontal
	11480.5	29.3	17.6	46.9	74.0	-27.1	Peak	Horizontal
	12007.5	28.6	17.0	45.6	74.0	-28.4	Peak	Horizontal
*	9814.5	31.4	13.7	45.1	68.2	-23.1	Peak	Vertical
*	10120.5	30.5	14.1	44.6	68.2	-23.6	Peak	Vertical
	11021.5	29.4	16.4	45.8	74.0	-28.2	Peak	Vertical
	11846.0	29.5	17.1	46.6	74.0	-27.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	30.9	13.7	44.6	68.2	-23.6	Peak	Horizontal
*	10265.0	30.8	14.6	45.4	68.2	-22.8	Peak	Horizontal
	11123.5	30.4	16.4	46.8	74.0	-27.2	Peak	Horizontal
	11540.0	31.5	17.6	49.1	74.0	-24.9	Peak	Horizontal
*	9857.0	30.8	13.5	44.3	68.2	-23.9	Peak	Vertical
*	10265.0	30.4	14.6	45.0	68.2	-23.2	Peak	Vertical
	10800.5	31.9	16.5	48.4	74.0	-25.6	Peak	Vertical
	11123.5	30.0	16.4	46.4	74.0	-27.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9993.0	31.0	13.7	44.7	68.2	-23.5	Peak	Horizontal
*	10401.0	30.8	15.1	45.9	68.2	-22.3	Peak	Horizontal
	11072.5	30.0	16.5	46.5	74.0	-27.5	Peak	Horizontal
	11786.5	29.0	17.6	46.6	74.0	-27.4	Peak	Horizontal
*	10401.0	30.8	15.1	45.9	68.2	-22.3	Peak	Vertical
	11548.5	31.5	17.7	49.2	74.0	-24.8	Peak	Vertical
	11897.0	28.9	17.4	46.3	74.0	-27.7	Peak	Vertical
*	17150.0	31.3	22.5	53.8	68.2	-14.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9721.0	31.7	13.5	45.2	68.2	-23.0	Peak	Horizontal
*	10171.5	30.6	14.1	44.7	68.2	-23.5	Peak	Horizontal
	10877.0	30.3	16.3	46.6	74.0	-27.4	Peak	Horizontal
	11693.0	31.7	17.3	49.0	74.0	-25.0	Peak	Horizontal
*	10018.5	32.7	13.8	46.5	68.2	-21.7	Peak	Vertical
*	10307.5	30.1	14.9	45.0	68.2	-23.2	Peak	Vertical
	11540.0	31.5	17.6	49.1	74.0	-24.9	Peak	Vertical
	12058.5	29.0	17.0	46.0	74.0	-28.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9593.5	31.4	13.3	44.7	68.2	-23.5	Peak	Horizontal
*	10120.5	30.8	14.1	44.9	68.2	-23.3	Peak	Horizontal
	10639.0	30.5	15.4	45.9	74.0	-28.1	Peak	Horizontal
	11557.0	31.0	17.9	48.9	74.0	-25.1	Peak	Horizontal
*	9942.0	31.0	13.8	44.8	68.2	-23.4	Peak	Vertical
*	10214.0	31.2	14.3	45.5	68.2	-22.7	Peak	Vertical
	11191.5	31.4	16.9	48.3	74.0	-25.7	Peak	Vertical
	11897.0	29.8	17.4	47.2	74.0	-26.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT80 – Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9678.5	30.7	13.5	44.2	68.2	-24.0	Peak	Horizontal
*	10171.5	31.0	14.1	45.1	68.2	-23.1	Peak	Horizontal
	10911.0	32.4	16.6	49.0	74.0	-25.0	Peak	Horizontal
	11531.5	29.2	17.3	46.5	74.0	-27.5	Peak	Horizontal
*	10171.5	31.3	14.1	45.4	68.2	-22.8	Peak	Vertical
	11276.5	28.2	17.0	45.2	74.0	-28.8	Peak	Vertical
	11633.5	28.8	17.7	46.5	74.0	-27.5	Peak	Vertical
*	13622.5	32.6	18.9	51.5	68.2	-16.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9729.5	32.8	13.5	46.3	68.2	-21.9	Peak	Horizontal
*	10214.0	30.8	14.3	45.1	68.2	-23.1	Peak	Horizontal
	11174.5	30.1	17.0	47.1	74.0	-26.9	Peak	Horizontal
	11557.0	30.8	17.9	48.7	74.0	-25.3	Peak	Horizontal
*	9704.0	33.8	13.5	47.3	68.2	-20.9	Peak	Vertical
*	10307.5	31.0	14.9	45.9	68.2	-22.3	Peak	Vertical
	11497.5	30.6	17.6	48.2	74.0	-25.8	Peak	Vertical
	11973.5	31.0	17.3	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT160 – Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9831.5	33.0	13.5	46.5	68.2	-21.7	Peak	Horizontal
*	10035.5	30.6	13.9	44.5	68.2	-23.7	Peak	Horizontal
	10877.0	29.6	16.3	45.9	74.0	-28.1	Peak	Horizontal
	11489.0	31.5	17.7	49.2	74.0	-24.8	Peak	Horizontal
*	10035.5	31.5	13.9	45.4	68.2	-22.8	Peak	Vertical
*	10443.5	30.5	15.5	46.0	68.2	-22.2	Peak	Vertical
	11225.5	30.9	16.9	47.8	74.0	-26.2	Peak	Vertical
	11812.0	31.7	17.7	49.4	74.0	-24.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2023-12-06	Test Mode	802.11be-EHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	31.1	13.8	44.9	68.2	-23.3	Peak	Horizontal
*	10214.0	30.5	14.3	44.8	68.2	-23.4	Peak	Horizontal
	10826.0	29.9	16.4	46.3	74.0	-27.7	Peak	Horizontal
	11540.0	31.4	17.6	49.0	74.0	-25.0	Peak	Horizontal
*	9942.0	30.7	13.8	44.5	68.2	-23.7	Peak	Vertical
*	10214.0	30.5	14.3	44.8	68.2	-23.4	Peak	Vertical
	11378.5	28.9	17.3	46.2	74.0	-27.8	Peak	Vertical
	11820.5	30.8	17.5	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

ANT 348# Normal Mode:

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11a – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9806.0	32.3	13.8	46.1	68.2	-22.1	Peak	Horizontal
*	10486.0	32.0	15.4	47.4	68.2	-20.8	Peak	Horizontal
	10911.0	31.1	16.6	47.7	74.0	-26.3	Peak	Horizontal
	11633.5	31.7	17.7	49.4	74.0	-24.6	Peak	Horizontal
*	9772.0	32.2	13.5	45.7	68.2	-22.5	Peak	Vertical
*	10282.0	32.1	14.8	46.9	68.2	-21.3	Peak	Vertical
	10970.5	31.4	16.2	47.6	74.0	-26.4	Peak	Vertical
	11905.5	31.1	17.4	48.5	74.0	-25.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11a – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9780.5	32.1	13.6	45.7	68.2	-22.5	Peak	Horizontal
*	10409.5	30.7	15.1	45.8	68.2	-22.4	Peak	Horizontal
	10860.0	31.8	16.4	48.2	74.0	-25.8	Peak	Horizontal
	11803.5	31.7	17.7	49.4	74.0	-24.6	Peak	Horizontal
*	9721.0	32.3	13.5	45.8	68.2	-22.4	Peak	Vertical
*	10214.0	30.9	14.3	45.2	68.2	-23.0	Peak	Vertical
	10885.5	31.4	16.3	47.7	74.0	-26.3	Peak	Vertical
	11489.0	31.2	17.7	48.9	74.0	-25.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11a – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	32.4	13.8	46.2	68.2	-22.0	Peak	Horizontal
*	10367.0	32.0	15.1	47.1	68.2	-21.1	Peak	Horizontal
	11565.5	30.2	17.8	48.0	74.0	-26.0	Peak	Horizontal
	12177.5	30.4	17.7	48.1	74.0	-25.9	Peak	Horizontal
*	9823.0	31.6	13.5	45.1	68.2	-23.1	Peak	Vertical
*	10120.5	32.4	14.1	46.5	68.2	-21.7	Peak	Vertical
	11489.0	31.1	17.7	48.8	74.0	-25.2	Peak	Vertical
	12177.5	31.6	17.7	49.3	74.0	-24.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11a – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	30.4	13.7	44.1	68.2	-24.1	Peak	Horizontal
*	10205.5	30.7	14.3	45.0	68.2	-23.2	Peak	Horizontal
	11174.5	30.6	17.0	47.6	74.0	-26.4	Peak	Horizontal
	11727.0	31.8	17.9	49.7	74.0	-24.3	Peak	Horizontal
*	9687.0	31.4	13.5	44.9	68.2	-23.3	Peak	Vertical
*	10129.0	31.7	14.2	45.9	68.2	-22.3	Peak	Vertical
	10928.0	30.9	16.7	47.6	74.0	-26.4	Peak	Vertical
	11540.0	30.5	17.6	48.1	74.0	-25.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11a – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9687.0	32.5	13.5	46.0	68.2	-22.2	Peak	Horizontal
*	10129.0	32.3	14.2	46.5	68.2	-21.7	Peak	Horizontal
	11548.5	30.9	17.7	48.6	74.0	-25.4	Peak	Horizontal
	12245.5	31.2	17.6	48.8	74.0	-25.2	Peak	Horizontal
*	9950.5	32.1	13.8	45.9	68.2	-22.3	Peak	Vertical
*	10265.0	31.0	14.6	45.6	68.2	-22.6	Peak	Vertical
	10928.0	32.3	16.7	49.0	74.0	-25.0	Peak	Vertical
	11880.0	31.0	17.3	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11a – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9678.5	32.8	13.5	46.3	68.2	-21.9	Peak	Horizontal
*	10120.5	32.5	14.1	46.6	68.2	-21.6	Peak	Horizontal
	11234.0	31.4	17.0	48.4	74.0	-25.6	Peak	Horizontal
	11625.0	31.1	17.6	48.7	74.0	-25.3	Peak	Horizontal
*	9857.0	31.3	13.5	44.8	68.2	-23.4	Peak	Vertical
*	10333.0	30.8	15.1	45.9	68.2	-22.3	Peak	Vertical
	11081.0	31.9	16.7	48.6	74.0	-25.4	Peak	Vertical
	11710.0	30.7	17.8	48.5	74.0	-25.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11a – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9695.5	31.3	13.5	44.8	68.2	-23.4	Peak	Horizontal
*	10384.0	31.4	15.1	46.5	68.2	-21.7	Peak	Horizontal
	11208.5	31.1	16.9	48.0	74.0	-26.0	Peak	Horizontal
	11982.0	31.1	17.3	48.4	74.0	-25.6	Peak	Horizontal
*	9857.0	32.6	13.5	46.1	68.2	-22.1	Peak	Vertical
*	10358.5	30.7	15.1	45.8	68.2	-22.4	Peak	Vertical
	10919.5	32.4	16.7	49.1	74.0	-24.9	Peak	Vertical
	11480.5	31.0	17.6	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11a – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9517.0	32.2	13.4	45.6	68.2	-22.6	Peak	Horizontal
*	10146.0	31.4	13.9	45.3	68.2	-22.9	Peak	Horizontal
	11310.5	30.0	17.3	47.3	74.0	-26.7	Peak	Horizontal
	12007.5	30.5	17.0	47.5	74.0	-26.5	Peak	Horizontal
*	9797.5	31.9	13.7	45.6	68.2	-22.6	Peak	Vertical
*	10299.0	31.8	14.9	46.7	68.2	-21.5	Peak	Vertical
	11072.5	30.8	16.5	47.3	74.0	-26.7	Peak	Vertical
	11531.5	31.5	17.3	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11a – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9610.5	32.3	13.2	45.5	68.2	-22.7	Peak	Horizontal
*	10129.0	33.2	14.2	47.4	68.2	-20.8	Peak	Horizontal
	10970.5	30.5	16.2	46.7	74.0	-27.3	Peak	Horizontal
	11650.5	30.8	17.8	48.6	74.0	-25.4	Peak	Horizontal
*	9525.5	32.2	13.4	45.6	68.2	-22.6	Peak	Vertical
*	10129.0	32.4	14.2	46.6	68.2	-21.6	Peak	Vertical
	10928.0	31.3	16.7	48.0	74.0	-26.0	Peak	Vertical
	11642.0	30.8	17.9	48.7	74.0	-25.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11a – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9712.5	32.1	13.5	45.6	68.2	-22.6	Peak	Horizontal
*	10188.5	31.4	14.3	45.7	68.2	-22.5	Peak	Horizontal
	11557.0	30.4	17.9	48.3	74.0	-25.7	Peak	Horizontal
	12050.0	30.8	16.9	47.7	74.0	-26.3	Peak	Horizontal
*	9942.0	31.9	13.8	45.7	68.2	-22.5	Peak	Vertical
*	10503.0	31.2	15.5	46.7	68.2	-21.5	Peak	Vertical
	10928.0	30.9	16.7	47.6	74.0	-26.4	Peak	Vertical
	11633.5	31.5	17.7	49.2	74.0	-24.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11a – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9984.5	32.3	13.8	46.1	68.2	-22.1	Peak	Horizontal
*	10528.5	31.2	15.3	46.5	68.2	-21.7	Peak	Horizontal
	11242.5	30.2	17.1	47.3	74.0	-26.7	Peak	Horizontal
	11710.0	30.2	17.8	48.0	74.0	-26.0	Peak	Horizontal
*	9797.5	32.5	13.7	46.2	68.2	-22.0	Peak	Vertical
*	10452.0	31.4	15.4	46.8	68.2	-21.4	Peak	Vertical
	11514.5	30.7	17.3	48.0	74.0	-26.0	Peak	Vertical
	12177.5	29.8	17.7	47.5	74.0	-26.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11a – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	10010.0	32.9	13.8	46.7	68.2	-21.5	Peak	Horizontal
*	10545.5	31.9	15.2	47.1	68.2	-21.1	Peak	Horizontal
	11557.0	30.2	17.9	48.1	74.0	-25.9	Peak	Horizontal
	12237.0	30.7	17.5	48.2	74.0	-25.8	Peak	Horizontal
*	9704.0	32.3	13.5	45.8	68.2	-22.4	Peak	Vertical
*	10188.5	31.7	14.3	46.0	68.2	-22.2	Peak	Vertical
	11251.0	30.4	17.2	47.6	74.0	-26.4	Peak	Vertical
	11778.0	30.4	17.4	47.8	74.0	-26.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11a – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9619.0	33.4	13.2	46.6	68.2	-21.6	Peak	Horizontal
*	10188.5	32.3	14.3	46.6	68.2	-21.6	Peak	Horizontal
	10800.5	31.7	16.5	48.2	74.0	-25.8	Peak	Horizontal
	11667.5	30.7	17.5	48.2	74.0	-25.8	Peak	Horizontal
*	9959.0	31.7	13.9	45.6	68.2	-22.6	Peak	Vertical
*	10418.0	31.0	15.2	46.2	68.2	-22.0	Peak	Vertical
	10911.0	30.7	16.6	47.3	74.0	-26.7	Peak	Vertical
	11395.5	31.1	17.5	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT20 – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9891.0	32.6	13.7	46.3	68.2	-21.9	Peak	Horizontal
*	10435.0	30.9	15.5	46.4	68.2	-21.8	Peak	Horizontal
	11259.5	30.7	17.1	47.8	74.0	-26.2	Peak	Horizontal
	11795.0	30.2	17.7	47.9	74.0	-26.1	Peak	Horizontal
*	9695.5	31.9	13.5	45.4	68.2	-22.8	Peak	Vertical
*	10316.0	31.8	14.9	46.7	68.2	-21.5	Peak	Vertical
	11098.0	31.0	16.8	47.8	74.0	-26.2	Peak	Vertical
	11642.0	30.0	17.9	47.9	74.0	-26.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT20 – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10129.0	32.0	14.2	46.2	68.2	-22.0	Peak	Horizontal
*	10350.0	30.0	15.2	45.2	68.2	-23.0	Peak	Horizontal
	10902.5	31.1	16.6	47.7	74.0	-26.3	Peak	Horizontal
	11548.5	30.5	17.7	48.2	74.0	-25.8	Peak	Horizontal
*	9593.5	30.5	13.3	43.8	68.2	-24.4	Peak	Vertical
*	10078.0	28.8	13.7	42.5	68.2	-25.7	Peak	Vertical
	10826.0	28.3	16.4	44.7	74.0	-29.3	Peak	Vertical
	11540.0	30.8	17.6	48.4	74.0	-25.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT20 – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9780.5	32.3	13.6	45.9	68.2	-22.3	Peak	Horizontal
*	10494.5	32.4	15.4	47.8	68.2	-20.4	Peak	Horizontal
	11293.5	31.8	17.1	48.9	74.0	-25.1	Peak	Horizontal
	12092.5	31.0	16.9	47.9	74.0	-26.1	Peak	Horizontal
*	9763.5	31.7	13.5	45.2	68.2	-23.0	Peak	Vertical
*	10324.5	30.7	15.1	45.8	68.2	-22.4	Peak	Vertical
	11336.0	30.0	17.4	47.4	74.0	-26.6	Peak	Vertical
	11608.0	30.5	17.2	47.7	74.0	-26.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9891.0	33.0	13.7	46.7	68.2	-21.5	Peak	Horizontal
*	10469.0	32.1	15.3	47.4	68.2	-20.8	Peak	Horizontal
	11327.5	31.7	17.4	49.1	74.0	-24.9	Peak	Horizontal
	11650.5	31.5	17.8	49.3	74.0	-24.7	Peak	Horizontal
*	9874.0	33.5	13.6	47.1	68.2	-21.1	Peak	Vertical
*	10452.0	30.4	15.4	45.8	68.2	-22.4	Peak	Vertical
	11191.5	29.8	16.9	46.7	74.0	-27.3	Peak	Vertical
	11676.0	30.5	17.3	47.8	74.0	-26.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9916.5	31.7	13.7	45.4	68.2	-22.8	Peak	Horizontal
*	10460.5	30.5	15.3	45.8	68.2	-22.4	Peak	Horizontal
	11497.5	30.1	17.6	47.7	74.0	-26.3	Peak	Horizontal
	11846.0	28.4	17.1	45.5	74.0	-28.5	Peak	Horizontal
*	9763.5	31.8	13.5	45.3	68.2	-22.9	Peak	Vertical
*	10477.5	31.4	15.3	46.7	68.2	-21.5	Peak	Vertical
	11293.5	30.6	17.1	47.7	74.0	-26.3	Peak	Vertical
	12143.5	31.2	17.3	48.5	74.0	-25.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9712.5	32.3	13.5	45.8	68.2	-22.4	Peak	Horizontal
*	10129.0	32.4	14.2	46.6	68.2	-21.6	Peak	Horizontal
	11183.0	30.6	17.0	47.6	74.0	-26.4	Peak	Horizontal
	11633.5	30.0	17.7	47.7	74.0	-26.3	Peak	Horizontal
*	10120.5	32.6	14.1	46.7	68.2	-21.5	Peak	Vertical
*	10460.5	31.1	15.3	46.4	68.2	-21.8	Peak	Vertical
	10928.0	31.0	16.7	47.7	74.0	-26.3	Peak	Vertical
	11633.5	30.0	17.7	47.7	74.0	-26.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9899.5	31.9	13.6	45.5	68.2	-22.7	Peak	Horizontal
*	10426.5	31.1	15.4	46.5	68.2	-21.7	Peak	Horizontal
	11021.5	29.9	16.4	46.3	74.0	-27.7	Peak	Horizontal
	11633.5	30.4	17.7	48.1	74.0	-25.9	Peak	Horizontal
*	9797.5	31.8	13.7	45.5	68.2	-22.7	Peak	Vertical
*	10486.0	31.2	15.4	46.6	68.2	-21.6	Peak	Vertical
	10911.0	32.3	16.6	48.9	74.0	-25.1	Peak	Vertical
	11608.0	31.8	17.2	49.0	74.0	-25.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9746.5	33.0	13.4	46.4	68.2	-21.8	Peak	Horizontal
*	10358.5	31.0	15.1	46.1	68.2	-22.1	Peak	Horizontal
	11565.5	31.2	17.8	49.0	74.0	-25.0	Peak	Horizontal
	12228.5	32.1	17.5	49.6	74.0	-24.4	Peak	Horizontal
*	9704.0	30.0	13.5	43.5	68.2	-24.7	Peak	Vertical
*	10129.0	30.4	14.2	44.6	68.2	-23.6	Peak	Vertical
	10945.0	30.7	16.4	47.1	74.0	-26.9	Peak	Vertical
	12228.5	32.1	17.5	49.6	74.0	-24.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9619.0	33.7	13.2	46.9	68.2	-21.3	Peak	Horizontal
*	10146.0	32.7	13.9	46.6	68.2	-21.6	Peak	Horizontal
	11089.5	30.8	16.8	47.6	74.0	-26.4	Peak	Horizontal
	11633.5	30.9	17.7	48.6	74.0	-25.4	Peak	Horizontal
*	9780.5	32.1	13.6	45.7	68.2	-22.5	Peak	Vertical
*	10443.5	31.8	15.5	47.3	68.2	-20.9	Peak	Vertical
	11497.5	31.1	17.6	48.7	74.0	-25.3	Peak	Vertical
	12050.0	30.9	16.9	47.8	74.0	-26.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9848.5	32.3	13.5	45.8	68.2	-22.4	Peak	Horizontal
*	10469.0	31.8	15.3	47.1	68.2	-21.1	Peak	Horizontal
	11225.5	31.5	16.9	48.4	74.0	-25.6	Peak	Horizontal
	11429.5	28.5	17.3	45.8	74.0	-28.2	Peak	Horizontal
*	9772.0	31.8	13.5	45.3	68.2	-22.9	Peak	Vertical
*	10137.5	32.2	14.1	46.3	68.2	-21.9	Peak	Vertical
	11429.5	28.5	17.3	45.8	74.0	-28.2	Peak	Vertical
	12058.5	31.2	17.0	48.2	74.0	-25.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9687.0	32.3	13.5	45.8	68.2	-22.4	Peak	Horizontal
*	10384.0	31.8	15.1	46.9	68.2	-21.3	Peak	Horizontal
	10902.5	31.4	16.6	48.0	74.0	-26.0	Peak	Horizontal
	11582.5	31.2	17.5	48.7	74.0	-25.3	Peak	Horizontal
*	9772.0	32.7	13.5	46.2	68.2	-22.0	Peak	Vertical
*	10384.0	32.0	15.1	47.1	68.2	-21.1	Peak	Vertical
	11310.5	30.2	17.3	47.5	74.0	-26.5	Peak	Vertical
	11582.5	31.2	17.5	48.7	74.0	-25.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT20 – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	32.5	13.5	46.0	68.2	-22.2	Peak	Horizontal
*	10358.5	30.4	15.1	45.5	68.2	-22.7	Peak	Horizontal
	11310.5	30.4	17.3	47.7	74.0	-26.3	Peak	Horizontal
	11565.5	30.9	17.8	48.7	74.0	-25.3	Peak	Horizontal
*	9721.0	32.3	13.5	45.8	68.2	-22.4	Peak	Vertical
*	10341.5	30.4	15.1	45.5	68.2	-22.7	Peak	Vertical
	10911.0	30.6	16.6	47.2	74.0	-26.8	Peak	Vertical
	11565.5	30.9	17.8	48.7	74.0	-25.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT20 – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9721.0	32.3	13.5	45.8	68.2	-22.4	Peak	Horizontal
*	10290.5	31.0	14.8	45.8	68.2	-22.4	Peak	Horizontal
	11276.5	29.7	17.0	46.7	74.0	-27.3	Peak	Horizontal
	12024.5	31.4	17.0	48.4	74.0	-25.6	Peak	Horizontal
*	9636.0	31.2	13.4	44.6	68.2	-23.6	Peak	Vertical
*	10120.5	31.3	14.1	45.4	68.2	-22.8	Peak	Vertical
	11217.0	30.2	16.8	47.0	74.0	-27.0	Peak	Vertical
	12186.0	30.9	17.7	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9738.0	32.5	13.5	46.0	68.2	-22.2	Peak	Horizontal
*	10231.0	32.2	14.2	46.4	68.2	-21.8	Peak	Horizontal
	11183.0	30.6	17.0	47.6	74.0	-26.4	Peak	Horizontal
	11914.0	30.2	17.3	47.5	74.0	-26.5	Peak	Horizontal
*	9942.0	31.9	13.8	45.7	68.2	-22.5	Peak	Vertical
*	10460.5	32.0	15.3	47.3	68.2	-20.9	Peak	Vertical
	11064.0	31.1	16.3	47.4	74.0	-26.6	Peak	Vertical
	11914.0	30.2	17.3	47.5	74.0	-26.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9687.0	32.3	13.5	45.8	68.2	-22.4	Peak	Horizontal
*	10214.0	29.6	14.3	43.9	68.2	-24.3	Peak	Horizontal
	10928.0	30.5	16.7	47.2	74.0	-26.8	Peak	Horizontal
	11531.5	31.9	17.3	49.2	74.0	-24.8	Peak	Horizontal
*	9789.0	32.1	13.6	45.7	68.2	-22.5	Peak	Vertical
*	10282.0	32.3	14.8	47.1	68.2	-21.1	Peak	Vertical
	11472.0	30.6	17.5	48.1	74.0	-25.9	Peak	Vertical
	12160.5	31.1	17.2	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9687.0	31.9	13.5	45.4	68.2	-22.8	Peak	Horizontal
*	10273.5	31.5	14.7	46.2	68.2	-22.0	Peak	Horizontal
	10902.5	31.3	16.6	47.9	74.0	-26.1	Peak	Horizontal
	11378.5	29.8	17.3	47.1	74.0	-26.9	Peak	Horizontal
*	9942.0	31.5	13.8	45.3	68.2	-22.9	Peak	Vertical
*	10452.0	30.8	15.4	46.2	68.2	-22.0	Peak	Vertical
	11157.5	30.6	16.7	47.3	74.0	-26.7	Peak	Vertical
	11608.0	31.3	17.2	48.5	74.0	-25.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	32.1	13.7	45.8	68.2	-22.4	Peak	Horizontal
*	10214.0	30.9	14.3	45.2	68.2	-23.0	Peak	Horizontal
	11123.5	29.4	16.4	45.8	74.0	-28.2	Peak	Horizontal
	11659.0	31.5	17.7	49.2	74.0	-24.8	Peak	Horizontal
*	9721.0	31.5	13.5	45.0	68.2	-23.2	Peak	Vertical
*	10384.0	31.4	15.1	46.5	68.2	-21.7	Peak	Vertical
	11242.5	30.7	17.1	47.8	74.0	-26.2	Peak	Vertical
	11557.0	31.7	17.9	49.6	74.0	-24.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9678.5	32.6	13.5	46.1	68.2	-22.1	Peak	Horizontal
*	10316.0	31.9	14.9	46.8	68.2	-21.4	Peak	Horizontal
	11055.5	32.2	16.3	48.5	74.0	-25.5	Peak	Horizontal
	11548.5	31.2	17.7	48.9	74.0	-25.1	Peak	Horizontal
*	9678.5	30.6	13.5	44.1	68.2	-24.1	Peak	Vertical
*	10214.0	30.4	14.3	44.7	68.2	-23.5	Peak	Vertical
	11540.0	31.4	17.6	49.0	74.0	-25.0	Peak	Vertical
	12228.5	30.1	17.5	47.6	74.0	-26.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9763.5	32.9	13.5	46.4	68.2	-21.8	Peak	Horizontal
*	10120.5	31.4	14.1	45.5	68.2	-22.7	Peak	Horizontal
	10928.0	30.6	16.7	47.3	74.0	-26.7	Peak	Horizontal
	11693.0	31.6	17.3	48.9	74.0	-25.1	Peak	Horizontal
*	9942.0	31.3	13.8	45.1	68.2	-23.1	Peak	Vertical
*	10418.0	31.3	15.2	46.5	68.2	-21.7	Peak	Vertical
	10877.0	32.0	16.3	48.3	74.0	-25.7	Peak	Vertical
	11557.0	31.0	17.9	48.9	74.0	-25.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9797.5	32.3	13.7	46.0	68.2	-22.2	Peak	Horizontal
*	10375.5	31.3	15.1	46.4	68.2	-21.8	Peak	Horizontal
	11208.5	30.5	16.9	47.4	74.0	-26.6	Peak	Horizontal
	12194.5	30.6	17.8	48.4	74.0	-25.6	Peak	Horizontal
*	10010.0	31.9	13.8	45.7	68.2	-22.5	Peak	Vertical
*	10384.0	31.1	15.1	46.2	68.2	-22.0	Peak	Vertical
	11327.5	29.6	17.4	47.0	74.0	-27.0	Peak	Vertical
	12194.5	30.6	17.8	48.4	74.0	-25.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9865.5	32.6	13.5	46.1	68.2	-22.1	Peak	Horizontal
*	10333.0	31.1	15.1	46.2	68.2	-22.0	Peak	Horizontal
	10987.5	31.2	16.4	47.6	74.0	-26.4	Peak	Horizontal
	11378.5	29.0	17.3	46.3	74.0	-27.7	Peak	Horizontal
*	9806.0	33.0	13.8	46.8	68.2	-21.4	Peak	Vertical
*	10239.5	31.6	14.3	45.9	68.2	-22.3	Peak	Vertical
	10877.0	31.7	16.3	48.0	74.0	-26.0	Peak	Vertical
	11599.5	31.7	17.2	48.9	74.0	-25.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9916.5	32.5	13.7	46.2	68.2	-22.0	Peak	Horizontal
*	10265.0	31.7	14.6	46.3	68.2	-21.9	Peak	Horizontal
	11242.5	31.3	17.1	48.4	74.0	-25.6	Peak	Horizontal
	11625.0	31.5	17.6	49.1	74.0	-24.9	Peak	Horizontal
*	9993.0	31.6	13.7	45.3	68.2	-22.9	Peak	Vertical
*	10375.5	30.3	15.1	45.4	68.2	-22.8	Peak	Vertical
	11225.5	28.5	16.9	45.4	74.0	-28.6	Peak	Vertical
	12245.5	30.8	17.6	48.4	74.0	-25.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9755.0	32.4	13.4	45.8	68.2	-22.4	Peak	Horizontal
*	10129.0	32.3	14.2	46.5	68.2	-21.7	Peak	Horizontal
	10911.0	31.3	16.6	47.9	74.0	-26.1	Peak	Horizontal
	11557.0	30.8	17.9	48.7	74.0	-25.3	Peak	Horizontal
*	9857.0	31.8	13.5	45.3	68.2	-22.9	Peak	Vertical
*	10375.5	31.1	15.1	46.2	68.2	-22.0	Peak	Vertical
	10902.5	32.0	16.6	48.6	74.0	-25.4	Peak	Vertical
	11548.5	31.2	17.7	48.9	74.0	-25.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9712.5	32.3	13.5	45.8	68.2	-22.4	Peak	Horizontal
*	10435.0	31.4	15.5	46.9	68.2	-21.3	Peak	Horizontal
	11021.5	29.8	16.4	46.2	74.0	-27.8	Peak	Horizontal
	11625.0	31.6	17.6	49.2	74.0	-24.8	Peak	Horizontal
*	9916.5	32.4	13.7	46.1	68.2	-22.1	Peak	Vertical
*	10307.5	31.6	14.9	46.5	68.2	-21.7	Peak	Vertical
	10885.5	32.0	16.3	48.3	74.0	-25.7	Peak	Vertical
	11650.5	30.5	17.8	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9789.0	33.9	13.6	47.5	68.2	-20.7	Peak	Horizontal
*	10350.0	32.1	15.2	47.3	68.2	-20.9	Peak	Horizontal
	11497.5	31.5	17.6	49.1	74.0	-24.9	Peak	Horizontal
	11727.0	31.0	17.9	48.9	74.0	-25.1	Peak	Horizontal
*	9636.0	30.5	13.4	43.9	68.2	-24.3	Peak	Vertical
*	9942.0	31.4	13.8	45.2	68.2	-23.0	Peak	Vertical
	10996.0	31.0	16.5	47.5	74.0	-26.5	Peak	Vertical
	11642.0	31.9	17.9	49.8	74.0	-24.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9789.0	32.2	13.6	45.8	68.2	-22.4	Peak	Horizontal
*	10171.5	30.5	14.1	44.6	68.2	-23.6	Peak	Horizontal
	11225.5	29.3	16.9	46.2	74.0	-27.8	Peak	Horizontal
	11582.5	29.7	17.5	47.2	74.0	-26.8	Peak	Horizontal
*	9840.0	32.6	13.5	46.1	68.2	-22.1	Peak	Vertical
*	10001.5	32.0	13.8	45.8	68.2	-22.4	Peak	Vertical
	10936.5	31.9	16.6	48.5	74.0	-25.5	Peak	Vertical
	12033.0	31.3	17.0	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9619.0	32.4	13.2	45.6	68.2	-22.6	Peak	Horizontal
*	10137.5	33.0	14.1	47.1	68.2	-21.1	Peak	Horizontal
	11242.5	31.2	17.1	48.3	74.0	-25.7	Peak	Horizontal
	11540.0	31.7	17.6	49.3	74.0	-24.7	Peak	Horizontal
*	10027.0	32.5	13.9	46.4	68.2	-21.8	Peak	Vertical
*	10273.5	31.0	14.7	45.7	68.2	-22.5	Peak	Vertical
	11574.0	32.0	17.7	49.7	74.0	-24.3	Peak	Vertical
	12288.0	30.9	17.6	48.5	74.0	-25.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT80 – Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9729.5	32.2	13.5	45.7	68.2	-22.5	Peak	Horizontal
*	10214.0	30.3	14.3	44.6	68.2	-23.6	Peak	Horizontal
	10970.5	29.8	16.2	46.0	74.0	-28.0	Peak	Horizontal
	11718.5	30.6	17.8	48.4	74.0	-25.6	Peak	Horizontal
*	9712.5	32.0	13.5	45.5	68.2	-22.7	Peak	Vertical
*	10214.0	30.9	14.3	45.2	68.2	-23.0	Peak	Vertical
	10928.0	31.0	16.7	47.7	74.0	-26.3	Peak	Vertical
	11667.5	31.3	17.5	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9865.5	32.7	13.5	46.2	68.2	-22.0	Peak	Horizontal
*	10443.5	30.5	15.5	46.0	68.2	-22.2	Peak	Horizontal
	10877.0	30.5	16.3	46.8	74.0	-27.2	Peak	Horizontal
	11684.5	31.1	17.3	48.4	74.0	-25.6	Peak	Horizontal
*	9857.0	31.7	13.5	45.2	68.2	-23.0	Peak	Vertical
*	10418.0	31.1	15.2	46.3	68.2	-21.9	Peak	Vertical
	11480.5	31.1	17.6	48.7	74.0	-25.3	Peak	Vertical
	12143.5	30.7	17.3	48.0	74.0	-26.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT160 – Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9763.5	32.9	13.5	46.4	68.2	-21.8	Peak	Horizontal
*	10486.0	31.3	15.4	46.7	68.2	-21.5	Peak	Horizontal
	11642.0	31.0	17.9	48.9	74.0	-25.1	Peak	Horizontal
	12339.0	31.1	16.8	47.9	74.0	-26.1	Peak	Horizontal
*	10129.0	31.9	14.2	46.1	68.2	-22.1	Peak	Vertical
*	10520.0	32.7	15.4	48.1	68.2	-20.1	Peak	Vertical
	11098.0	30.9	16.8	47.7	74.0	-26.3	Peak	Vertical
	12262.5	30.5	17.4	47.9	74.0	-26.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ac-VHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9789.0	32.8	13.6	46.4	68.2	-21.8	Peak	Horizontal
*	10129.0	31.9	14.2	46.1	68.2	-22.1	Peak	Horizontal
	10826.0	30.9	16.4	47.3	74.0	-26.7	Peak	Horizontal
	11557.0	30.8	17.9	48.7	74.0	-25.3	Peak	Horizontal
*	9780.5	31.9	13.6	45.5	68.2	-22.7	Peak	Vertical
*	10256.5	31.4	14.5	45.9	68.2	-22.3	Peak	Vertical
	10894.0	30.7	16.4	47.1	74.0	-26.9	Peak	Vertical
	11429.5	29.3	17.3	46.6	74.0	-27.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE20 – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	32.9	13.5	46.4	68.2	-21.8	Peak	Horizontal
*	10350.0	31.3	15.2	46.5	68.2	-21.7	Peak	Horizontal
	10970.5	32.4	16.2	48.6	74.0	-25.4	Peak	Horizontal
	11489.0	31.2	17.7	48.9	74.0	-25.1	Peak	Horizontal
*	9840.0	32.1	13.5	45.6	68.2	-22.6	Peak	Vertical
*	10129.0	31.9	14.2	46.1	68.2	-22.1	Peak	Vertical
	10885.5	31.1	16.3	47.4	74.0	-26.6	Peak	Vertical
	11548.5	31.3	17.7	49.0	74.0	-25.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE20 – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9721.0	32.0	13.5	45.5	68.2	-22.7	Peak	Horizontal
*	10137.5	32.1	14.1	46.2	68.2	-22.0	Peak	Horizontal
	11225.5	28.9	16.9	45.8	74.0	-28.2	Peak	Horizontal
	11684.5	29.4	17.3	46.7	74.0	-27.3	Peak	Horizontal
*	9721.0	30.9	13.5	44.4	68.2	-23.8	Peak	Vertical
*	10188.5	31.8	14.3	46.1	68.2	-22.1	Peak	Vertical
	11276.5	30.0	17.0	47.0	74.0	-27.0	Peak	Vertical
	12126.5	29.7	17.2	46.9	74.0	-27.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE20 – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	30.9	13.7	44.6	68.2	-23.6	Peak	Horizontal
*	10129.0	31.4	14.2	45.6	68.2	-22.6	Peak	Horizontal
	10860.0	30.4	16.4	46.8	74.0	-27.2	Peak	Horizontal
	11625.0	30.9	17.6	48.5	74.0	-25.5	Peak	Horizontal
*	9636.0	30.7	13.4	44.1	68.2	-24.1	Peak	Vertical
*	10078.0	29.2	13.7	42.9	68.2	-25.3	Peak	Vertical
	10945.0	30.3	16.4	46.7	74.0	-27.3	Peak	Vertical
	11540.0	30.1	17.6	47.7	74.0	-26.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9704.0	31.0	13.5	44.5	68.2	-23.7	Peak	Horizontal
*	9993.0	30.4	13.7	44.1	68.2	-24.1	Peak	Horizontal
	10928.0	30.4	16.7	47.1	74.0	-26.9	Peak	Horizontal
	11684.5	30.4	17.3	47.7	74.0	-26.3	Peak	Horizontal
*	9950.5	32.0	13.8	45.8	68.2	-22.4	Peak	Vertical
*	10443.5	32.1	15.5	47.6	68.2	-20.6	Peak	Vertical
	11251.0	30.8	17.2	48.0	74.0	-26.0	Peak	Vertical
	11633.5	30.9	17.7	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	33.5	13.5	47.0	68.2	-21.2	Peak	Horizontal
*	10120.5	32.9	14.1	47.0	68.2	-21.2	Peak	Horizontal
	10911.0	31.3	16.6	47.9	74.0	-26.1	Peak	Horizontal
	11429.5	29.3	17.3	46.6	74.0	-27.4	Peak	Horizontal
*	9721.0	30.2	13.5	43.7	68.2	-24.5	Peak	Vertical
*	10290.5	31.7	14.8	46.5	68.2	-21.7	Peak	Vertical
	11429.5	29.3	17.3	46.6	74.0	-27.4	Peak	Vertical
	12186.0	30.9	17.7	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9823.0	31.6	13.5	45.1	68.2	-23.1	Peak	Horizontal
*	10129.0	32.6	14.2	46.8	68.2	-21.4	Peak	Horizontal
	11183.0	31.5	17.0	48.5	74.0	-25.5	Peak	Horizontal
	12194.5	30.5	17.8	48.3	74.0	-25.7	Peak	Horizontal
*	9636.0	30.0	13.4	43.4	68.2	-24.8	Peak	Vertical
*	10282.0	31.4	14.8	46.2	68.2	-22.0	Peak	Vertical
	11004.5	31.8	16.5	48.3	74.0	-25.7	Peak	Vertical
	12109.5	31.5	17.0	48.5	74.0	-25.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9678.5	31.4	13.5	44.9	68.2	-23.3	Peak	Horizontal
*	10078.0	30.4	13.7	44.1	68.2	-24.1	Peak	Horizontal
	10877.0	30.7	16.3	47.0	74.0	-27.0	Peak	Horizontal
	11727.0	30.8	17.9	48.7	74.0	-25.3	Peak	Horizontal
*	9814.5	32.1	13.7	45.8	68.2	-22.4	Peak	Vertical
*	10307.5	31.6	14.9	46.5	68.2	-21.7	Peak	Vertical
	11412.5	29.9	17.5	47.4	74.0	-26.6	Peak	Vertical
	12177.5	30.4	17.7	48.1	74.0	-25.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9865.5	31.5	13.5	45.0	68.2	-23.2	Peak	Horizontal
*	10307.5	28.5	14.9	43.4	68.2	-24.8	Peak	Horizontal
	11072.5	29.4	16.5	45.9	74.0	-28.1	Peak	Horizontal
	11548.5	30.6	17.7	48.3	74.0	-25.7	Peak	Horizontal
*	9772.0	31.5	13.5	45.0	68.2	-23.2	Peak	Vertical
*	10112.0	31.2	14.0	45.2	68.2	-23.0	Peak	Vertical
	11259.5	30.0	17.1	47.1	74.0	-26.9	Peak	Vertical
	11888.5	30.0	17.3	47.3	74.0	-26.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9746.5	32.2	13.4	45.6	68.2	-22.6	Peak	Horizontal
*	10435.0	30.6	15.5	46.1	68.2	-22.1	Peak	Horizontal
	11259.5	29.8	17.1	46.9	74.0	-27.1	Peak	Horizontal
	12109.5	30.4	17.0	47.4	74.0	-26.6	Peak	Horizontal
*	9721.0	30.2	13.5	43.7	68.2	-24.5	Peak	Vertical
*	10129.0	31.8	14.2	46.0	68.2	-22.2	Peak	Vertical
	10928.0	29.0	16.7	45.7	74.0	-28.3	Peak	Vertical
	11616.5	30.7	17.4	48.1	74.0	-25.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9729.5	31.5	13.5	45.0	68.2	-23.2	Peak	Horizontal
*	10086.5	30.8	13.8	44.6	68.2	-23.6	Peak	Horizontal
	10979.0	31.5	16.2	47.7	74.0	-26.3	Peak	Horizontal
	11633.5	29.9	17.7	47.6	74.0	-26.4	Peak	Horizontal
*	9712.5	32.2	13.5	45.7	68.2	-22.5	Peak	Vertical
*	10137.5	33.0	14.1	47.1	68.2	-21.1	Peak	Vertical
	11234.0	30.7	17.0	47.7	74.0	-26.3	Peak	Vertical
	11710.0	30.6	17.8	48.4	74.0	-25.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9602.0	31.9	13.3	45.2	68.2	-23.0	Peak	Horizontal
*	10112.0	32.1	14.0	46.1	68.2	-22.1	Peak	Horizontal
	10953.5	31.4	16.3	47.7	74.0	-26.3	Peak	Horizontal
	11557.0	30.6	17.9	48.5	74.0	-25.5	Peak	Horizontal
*	9899.5	32.7	13.6	46.3	68.2	-21.9	Peak	Vertical
*	10375.5	31.1	15.1	46.2	68.2	-22.0	Peak	Vertical
	11234.0	30.6	17.0	47.6	74.0	-26.4	Peak	Vertical
	11769.5	30.7	17.4	48.1	74.0	-25.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE20 – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	32.4	13.5	45.9	68.2	-22.3	Peak	Horizontal
*	10120.5	32.0	14.1	46.1	68.2	-22.1	Peak	Horizontal
	11582.5	31.2	17.5	48.7	74.0	-25.3	Peak	Horizontal
	12220.0	31.0	17.5	48.5	74.0	-25.5	Peak	Horizontal
*	9840.0	31.7	13.5	45.2	68.2	-23.0	Peak	Vertical
*	10341.5	30.8	15.1	45.9	68.2	-22.3	Peak	Vertical
	10809.0	31.3	16.5	47.8	74.0	-26.2	Peak	Vertical
	11625.0	30.7	17.6	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE20 – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9797.5	31.8	13.7	45.5	68.2	-22.7	Peak	Horizontal
*	10137.5	31.7	14.1	45.8	68.2	-22.4	Peak	Horizontal
	11242.5	29.9	17.1	47.0	74.0	-27.0	Peak	Horizontal
	11795.0	29.4	17.7	47.1	74.0	-26.9	Peak	Horizontal
*	9772.0	31.7	13.5	45.2	68.2	-23.0	Peak	Vertical
*	10120.5	32.1	14.1	46.2	68.2	-22.0	Peak	Vertical
	10826.0	31.6	16.4	48.0	74.0	-26.0	Peak	Vertical
	11251.0	30.6	17.2	47.8	74.0	-26.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9602.0	32.4	13.3	45.7	68.2	-22.5	Peak	Horizontal
*	10341.5	30.8	15.1	45.9	68.2	-22.3	Peak	Horizontal
	10936.5	30.8	16.6	47.4	74.0	-26.6	Peak	Horizontal
	11497.5	30.8	17.6	48.4	74.0	-25.6	Peak	Horizontal
*	9806.0	32.1	13.8	45.9	68.2	-22.3	Peak	Vertical
*	10443.5	30.1	15.5	45.6	68.2	-22.6	Peak	Vertical
	10953.5	30.8	16.3	47.1	74.0	-26.9	Peak	Vertical
	11489.0	30.4	17.7	48.1	74.0	-25.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9780.5	30.8	13.6	44.4	68.2	-23.8	Peak	Horizontal
*	10367.0	30.8	15.1	45.9	68.2	-22.3	Peak	Horizontal
	10987.5	30.3	16.4	46.7	74.0	-27.3	Peak	Horizontal
	11557.0	30.1	17.9	48.0	74.0	-26.0	Peak	Horizontal
*	9942.0	31.8	13.8	45.6	68.2	-22.6	Peak	Vertical
*	10307.5	30.9	14.9	45.8	68.2	-22.4	Peak	Vertical
	10996.0	30.2	16.5	46.7	74.0	-27.3	Peak	Vertical
	11769.5	31.0	17.4	48.4	74.0	-25.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9593.5	32.2	13.3	45.5	68.2	-22.7	Peak	Horizontal
*	10452.0	30.9	15.4	46.3	68.2	-21.9	Peak	Horizontal
	10928.0	30.5	16.7	47.2	74.0	-26.8	Peak	Horizontal
	11276.5	31.0	17.0	48.0	74.0	-26.0	Peak	Horizontal
*	9712.5	32.9	13.5	46.4	68.2	-21.8	Peak	Vertical
*	10137.5	31.7	14.1	45.8	68.2	-22.4	Peak	Vertical
	10936.5	31.4	16.6	48.0	74.0	-26.0	Peak	Vertical
	11557.0	30.6	17.9	48.5	74.0	-25.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10027.0	31.8	13.9	45.7	68.2	-22.5	Peak	Horizontal
*	10469.0	31.0	15.3	46.3	68.2	-21.9	Peak	Horizontal
	10996.0	31.3	16.5	47.8	74.0	-26.2	Peak	Horizontal
	11582.5	28.9	17.5	46.4	74.0	-27.6	Peak	Horizontal
*	9967.5	30.8	13.9	44.7	68.2	-23.5	Peak	Vertical
*	10409.5	30.5	15.1	45.6	68.2	-22.6	Peak	Vertical
	11004.5	29.9	16.5	46.4	74.0	-27.6	Peak	Vertical
	11489.0	29.6	17.7	47.3	74.0	-26.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9619.0	32.7	13.2	45.9	68.2	-22.3	Peak	Horizontal
*	10197.0	31.5	14.4	45.9	68.2	-22.3	Peak	Horizontal
	10885.5	30.1	16.3	46.4	74.0	-27.6	Peak	Horizontal
	11599.5	31.4	17.2	48.6	74.0	-25.4	Peak	Horizontal
*	9814.5	33.0	13.7	46.7	68.2	-21.5	Peak	Vertical
*	10384.0	31.4	15.1	46.5	68.2	-21.7	Peak	Vertical
	10868.5	30.9	16.3	47.2	74.0	-26.8	Peak	Vertical
	11599.5	31.1	17.2	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9993.0	32.6	13.7	46.3	68.2	-21.9	Peak	Horizontal
*	10375.5	30.5	15.1	45.6	68.2	-22.6	Peak	Horizontal
	11055.5	29.9	16.3	46.2	74.0	-27.8	Peak	Horizontal
	11582.5	30.8	17.5	48.3	74.0	-25.7	Peak	Horizontal
*	9916.5	31.2	13.7	44.9	68.2	-23.3	Peak	Vertical
*	10409.5	30.7	15.1	45.8	68.2	-22.4	Peak	Vertical
	11166.0	30.0	17.0	47.0	74.0	-27.0	Peak	Vertical
	11710.0	30.9	17.8	48.7	74.0	-25.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	31.8	13.7	45.5	68.2	-22.7	Peak	Horizontal
*	10375.5	30.6	15.1	45.7	68.2	-22.5	Peak	Horizontal
	11234.0	29.6	17.0	46.6	74.0	-27.4	Peak	Horizontal
	11625.0	31.3	17.6	48.9	74.0	-25.1	Peak	Horizontal
*	9712.5	32.7	13.5	46.2	68.2	-22.0	Peak	Vertical
*	10129.0	31.8	14.2	46.0	68.2	-22.2	Peak	Vertical
	11123.5	31.2	16.4	47.6	74.0	-26.4	Peak	Vertical
	11642.0	30.3	17.9	48.2	74.0	-25.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9882.5	32.3	13.6	45.9	68.2	-22.3	Peak	Horizontal
*	10265.0	31.9	14.6	46.5	68.2	-21.7	Peak	Horizontal
	11242.5	31.1	17.1	48.2	74.0	-25.8	Peak	Horizontal
	11565.5	30.5	17.8	48.3	74.0	-25.7	Peak	Horizontal
*	9789.0	31.3	13.6	44.9	68.2	-23.3	Peak	Vertical
*	10341.5	30.8	15.1	45.9	68.2	-22.3	Peak	Vertical
	11183.0	30.5	17.0	47.5	74.0	-26.5	Peak	Vertical
	12194.5	30.2	17.8	48.0	74.0	-26.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9806.0	30.9	13.8	44.7	68.2	-23.5	Peak	Horizontal
*	10528.5	31.0	15.3	46.3	68.2	-21.9	Peak	Horizontal
	11140.5	30.8	16.4	47.2	74.0	-26.8	Peak	Horizontal
	11761.0	31.2	17.3	48.5	74.0	-25.5	Peak	Horizontal
*	9814.5	30.2	13.7	43.9	68.2	-24.3	Peak	Vertical
*	10120.5	30.9	14.1	45.0	68.2	-23.2	Peak	Vertical
	10936.5	30.5	16.6	47.1	74.0	-26.9	Peak	Vertical
	11548.5	30.8	17.7	48.5	74.0	-25.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9899.5	30.6	13.6	44.2	68.2	-24.0	Peak	Horizontal
*	10265.0	30.9	14.6	45.5	68.2	-22.7	Peak	Horizontal
	11166.0	30.5	17.0	47.5	74.0	-26.5	Peak	Horizontal
	11701.5	30.8	17.5	48.3	74.0	-25.7	Peak	Horizontal
*	9721.0	30.4	13.5	43.9	68.2	-24.3	Peak	Vertical
*	10333.0	29.9	15.1	45.0	68.2	-23.2	Peak	Vertical
	10877.0	29.5	16.3	45.8	74.0	-28.2	Peak	Vertical
	11710.0	30.4	17.8	48.2	74.0	-25.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9942.0	32.3	13.8	46.1	68.2	-22.1	Peak	Horizontal
*	10401.0	30.8	15.1	45.9	68.2	-22.3	Peak	Horizontal
	11497.5	30.0	17.6	47.6	74.0	-26.4	Peak	Horizontal
	12296.5	30.3	17.6	47.9	74.0	-26.1	Peak	Horizontal
*	9755.0	32.4	13.4	45.8	68.2	-22.4	Peak	Vertical
*	10511.5	30.9	15.4	46.3	68.2	-21.9	Peak	Vertical
	11174.5	29.4	17.0	46.4	74.0	-27.6	Peak	Vertical
	11735.5	28.5	17.7	46.2	74.0	-27.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9806.0	32.3	13.8	46.1	68.2	-22.1	Peak	Horizontal
*	10120.5	32.8	14.1	46.9	68.2	-21.3	Peak	Horizontal
	11115.0	31.0	16.5	47.5	74.0	-26.5	Peak	Horizontal
	11812.0	30.4	17.7	48.1	74.0	-25.9	Peak	Horizontal
*	9814.5	31.9	13.7	45.6	68.2	-22.6	Peak	Vertical
*	10214.0	30.0	14.3	44.3	68.2	-23.9	Peak	Vertical
	11021.5	29.5	16.4	45.9	74.0	-28.1	Peak	Vertical
	11633.5	30.6	17.7	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9636.0	32.2	13.4	45.6	68.2	-22.6	Peak	Horizontal
*	10171.5	29.9	14.1	44.0	68.2	-24.2	Peak	Horizontal
	10928.0	30.4	16.7	47.1	74.0	-26.9	Peak	Horizontal
	11574.0	31.1	17.7	48.8	74.0	-25.2	Peak	Horizontal
*	10103.5	31.3	13.9	45.2	68.2	-23.0	Peak	Vertical
*	10520.0	30.8	15.4	46.2	68.2	-22.0	Peak	Vertical
	10911.0	30.8	16.6	47.4	74.0	-26.6	Peak	Vertical
	11659.0	30.7	17.7	48.4	74.0	-25.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9746.5	31.4	13.4	44.8	68.2	-23.4	Peak	Horizontal
*	10086.5	31.0	13.8	44.8	68.2	-23.4	Peak	Horizontal
	11208.5	28.9	16.9	45.8	74.0	-28.2	Peak	Horizontal
	12271.0	31.0	17.3	48.3	74.0	-25.7	Peak	Horizontal
*	9857.0	31.3	13.5	44.8	68.2	-23.4	Peak	Vertical
*	10486.0	31.3	15.4	46.7	68.2	-21.5	Peak	Vertical
	11259.5	30.9	17.1	48.0	74.0	-26.0	Peak	Vertical
	11650.5	30.8	17.8	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE80 – Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9806.0	32.0	13.8	45.8	68.2	-22.4	Peak	Horizontal
*	10367.0	31.1	15.1	46.2	68.2	-22.0	Peak	Horizontal
	11013.0	31.5	16.5	48.0	74.0	-26.0	Peak	Horizontal
	11684.5	31.1	17.3	48.4	74.0	-25.6	Peak	Horizontal
*	9653.0	30.9	13.5	44.4	68.2	-23.8	Peak	Vertical
*	10112.0	30.8	14.0	44.8	68.2	-23.4	Peak	Vertical
	11072.5	30.2	16.5	46.7	74.0	-27.3	Peak	Vertical
	12279.5	30.4	17.4	47.8	74.0	-26.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9721.0	32.4	13.5	45.9	68.2	-22.3	Peak	Horizontal
*	10460.5	32.5	15.3	47.8	68.2	-20.4	Peak	Horizontal
	10826.0	29.2	16.4	45.6	74.0	-28.4	Peak	Horizontal
	11480.5	29.4	17.6	47.0	74.0	-27.0	Peak	Horizontal
*	9678.5	30.9	13.5	44.4	68.2	-23.8	Peak	Vertical
*	10307.5	29.4	14.9	44.3	68.2	-23.9	Peak	Vertical
	10970.5	29.6	16.2	45.8	74.0	-28.2	Peak	Vertical
	11710.0	31.0	17.8	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE160 – Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9721.0	31.8	13.5	45.3	68.2	-22.9	Peak	Horizontal
*	10120.5	31.6	14.1	45.7	68.2	-22.5	Peak	Horizontal
	11081.0	30.6	16.7	47.3	74.0	-26.7	Peak	Horizontal
	11914.0	31.0	17.3	48.3	74.0	-25.7	Peak	Horizontal
*	9916.5	31.5	13.7	45.2	68.2	-23.0	Peak	Vertical
*	10494.5	29.8	15.4	45.2	68.2	-23.0	Peak	Vertical
	10970.5	30.4	16.2	46.6	74.0	-27.4	Peak	Vertical
	11633.5	29.6	17.7	47.3	74.0	-26.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11ax-HE160 – Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9568.0	32.4	13.3	45.7	68.2	-22.5	Peak	Horizontal
*	10129.0	31.3	14.2	45.5	68.2	-22.7	Peak	Horizontal
	11098.0	31.0	16.8	47.8	74.0	-26.2	Peak	Horizontal
	12169.0	30.3	17.4	47.7	74.0	-26.3	Peak	Horizontal
*	9899.5	31.7	13.6	45.3	68.2	-22.9	Peak	Vertical
*	10443.5	30.2	15.5	45.7	68.2	-22.5	Peak	Vertical
	11650.5	29.8	17.8	47.6	74.0	-26.4	Peak	Vertical
	12237.0	30.4	17.5	47.9	74.0	-26.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT20 – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	32.9	13.5	46.4	68.2	-21.8	Peak	Horizontal
*	10273.5	31.4	14.7	46.1	68.2	-22.1	Peak	Horizontal
	10945.0	31.7	16.4	48.1	74.0	-25.9	Peak	Horizontal
	11633.5	31.1	17.7	48.8	74.0	-25.2	Peak	Horizontal
*	10112.0	32.6	14.0	46.6	68.2	-21.6	Peak	Vertical
*	10511.5	30.9	15.4	46.3	68.2	-21.9	Peak	Vertical
	10877.0	31.1	16.3	47.4	74.0	-26.6	Peak	Vertical
	11565.5	30.5	17.8	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT20 – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	30.0	13.7	43.7	68.2	-24.5	Peak	Horizontal
*	10477.5	31.8	15.3	47.1	68.2	-21.1	Peak	Horizontal
	11378.5	28.3	17.3	45.6	74.0	-28.4	Peak	Horizontal
	11897.0	29.1	17.4	46.5	74.0	-27.5	Peak	Horizontal
*	9678.5	30.8	13.5	44.3	68.2	-23.9	Peak	Vertical
*	10367.0	31.2	15.1	46.3	68.2	-21.9	Peak	Vertical
	11319.0	29.8	17.4	47.2	74.0	-26.8	Peak	Vertical
	11625.0	30.7	17.6	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT20 – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9780.5	32.2	13.6	45.8	68.2	-22.4	Peak	Horizontal
*	10435.0	30.4	15.5	45.9	68.2	-22.3	Peak	Horizontal
	11285.0	29.8	16.9	46.7	74.0	-27.3	Peak	Horizontal
	11973.5	29.7	17.3	47.0	74.0	-27.0	Peak	Horizontal
*	9814.5	32.1	13.7	45.8	68.2	-22.4	Peak	Vertical
*	10426.5	29.8	15.4	45.2	68.2	-23.0	Peak	Vertical
	11115.0	30.5	16.5	47.0	74.0	-27.0	Peak	Vertical
	11608.0	30.4	17.2	47.6	74.0	-26.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9908.0	31.8	13.6	45.4	68.2	-22.8	Peak	Horizontal
*	10282.0	30.4	14.8	45.2	68.2	-23.0	Peak	Horizontal
	11021.5	29.9	16.4	46.3	74.0	-27.7	Peak	Horizontal
	11480.5	28.7	17.6	46.3	74.0	-27.7	Peak	Horizontal
*	10120.5	31.0	14.1	45.1	68.2	-23.1	Peak	Vertical
*	10460.5	30.5	15.3	45.8	68.2	-22.4	Peak	Vertical
	11429.5	30.2	17.3	47.5	74.0	-26.5	Peak	Vertical
	12203.0	30.1	17.7	47.8	74.0	-26.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	30.8	13.5	44.3	68.2	-23.9	Peak	Horizontal
*	10205.5	31.7	14.3	46.0	68.2	-22.2	Peak	Horizontal
	11310.5	30.4	17.3	47.7	74.0	-26.3	Peak	Horizontal
	11599.5	32.0	17.2	49.2	74.0	-24.8	Peak	Horizontal
*	9593.5	30.3	13.3	43.6	68.2	-24.6	Peak	Vertical
*	10265.0	30.2	14.6	44.8	68.2	-23.4	Peak	Vertical
	11429.5	28.7	17.3	46.0	74.0	-28.0	Peak	Vertical
	12067.0	30.4	17.0	47.4	74.0	-26.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9661.5	32.4	13.5	45.9	68.2	-22.3	Peak	Horizontal
*	9993.0	29.8	13.7	43.5	68.2	-24.7	Peak	Horizontal
	10928.0	29.9	16.7	46.6	74.0	-27.4	Peak	Horizontal
	11786.5	28.7	17.6	46.3	74.0	-27.7	Peak	Horizontal
*	10078.0	30.4	13.7	44.1	68.2	-24.1	Peak	Vertical
*	10494.5	31.0	15.4	46.4	68.2	-21.8	Peak	Vertical
	11055.5	30.7	16.3	47.0	74.0	-27.0	Peak	Vertical
	11625.0	30.6	17.6	48.2	74.0	-25.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9704.0	31.6	13.5	45.1	68.2	-23.1	Peak	Horizontal
*	10129.0	31.3	14.2	45.5	68.2	-22.7	Peak	Horizontal
	10919.5	30.2	16.7	46.9	74.0	-27.1	Peak	Horizontal
	11625.0	31.1	17.6	48.7	74.0	-25.3	Peak	Horizontal
*	9874.0	32.0	13.6	45.6	68.2	-22.6	Peak	Vertical
*	10426.5	31.7	15.4	47.1	68.2	-21.1	Peak	Vertical
	11472.0	30.1	17.5	47.6	74.0	-26.4	Peak	Vertical
	12135.0	31.3	17.3	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9636.0	30.9	13.4	44.3	68.2	-23.9	Peak	Horizontal
*	10214.0	30.5	14.3	44.8	68.2	-23.4	Peak	Horizontal
	11489.0	29.6	17.7	47.3	74.0	-26.7	Peak	Horizontal
	12296.5	31.1	17.6	48.7	74.0	-25.3	Peak	Horizontal
*	9780.5	31.7	13.6	45.3	68.2	-22.9	Peak	Vertical
*	10214.0	30.8	14.3	45.1	68.2	-23.1	Peak	Vertical
	10970.5	31.3	16.2	47.5	74.0	-26.5	Peak	Vertical
	11582.5	31.1	17.5	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9704.0	31.9	13.5	45.4	68.2	-22.8	Peak	Horizontal
*	10180.0	31.8	14.2	46.0	68.2	-22.2	Peak	Horizontal
	11183.0	29.9	17.0	46.9	74.0	-27.1	Peak	Horizontal
	11642.0	30.7	17.9	48.6	74.0	-25.4	Peak	Horizontal
*	9763.5	31.8	13.5	45.3	68.2	-22.9	Peak	Vertical
*	10418.0	31.0	15.2	46.2	68.2	-22.0	Peak	Vertical
	11183.0	30.7	17.0	47.7	74.0	-26.3	Peak	Vertical
	11642.0	30.9	17.9	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT20 – Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	31.6	13.5	45.1	68.2	-23.1	Peak	Horizontal
*	10180.0	32.1	14.2	46.3	68.2	-21.9	Peak	Horizontal
	10979.0	31.1	16.2	47.3	74.0	-26.7	Peak	Horizontal
	11548.5	30.6	17.7	48.3	74.0	-25.7	Peak	Horizontal
*	9721.0	30.7	13.5	44.2	68.2	-24.0	Peak	Vertical
*	10435.0	30.6	15.5	46.1	68.2	-22.1	Peak	Vertical
	11438.0	30.4	17.2	47.6	74.0	-26.4	Peak	Vertical
	11735.5	29.0	17.7	46.7	74.0	-27.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9755.0	31.8	13.4	45.2	68.2	-23.0	Peak	Horizontal
*	10197.0	33.5	14.4	47.9	68.2	-20.3	Peak	Horizontal
	10826.0	31.3	16.4	47.7	74.0	-26.3	Peak	Horizontal
	11650.5	31.2	17.8	49.0	74.0	-25.0	Peak	Horizontal
*	9755.0	31.8	13.4	45.2	68.2	-23.0	Peak	Vertical
*	10027.0	32.4	13.9	46.3	68.2	-21.9	Peak	Vertical
	10928.0	31.3	16.7	48.0	74.0	-26.0	Peak	Vertical
	11752.5	30.8	17.4	48.2	74.0	-25.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT20 – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9619.0	32.2	13.2	45.4	68.2	-22.8	Peak	Horizontal
*	10188.5	31.8	14.3	46.1	68.2	-22.1	Peak	Horizontal
	11523.0	30.9	17.2	48.1	74.0	-25.9	Peak	Horizontal
	12143.5	30.3	17.3	47.6	74.0	-26.4	Peak	Horizontal
*	9806.0	33.1	13.8	46.9	68.2	-21.3	Peak	Vertical
*	10443.5	30.7	15.5	46.2	68.2	-22.0	Peak	Vertical
	10928.0	31.4	16.7	48.1	74.0	-25.9	Peak	Vertical
	11795.0	30.4	17.7	48.1	74.0	-25.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT20 – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9882.5	32.7	13.6	46.3	68.2	-21.9	Peak	Horizontal
*	10341.5	31.1	15.1	46.2	68.2	-22.0	Peak	Horizontal
	10928.0	30.1	16.7	46.8	74.0	-27.2	Peak	Horizontal
	11514.5	31.0	17.3	48.3	74.0	-25.7	Peak	Horizontal
*	10197.0	31.8	14.4	46.2	68.2	-22.0	Peak	Vertical
*	10435.0	31.4	15.5	46.9	68.2	-21.3	Peak	Vertical
	10902.5	31.1	16.6	47.7	74.0	-26.3	Peak	Vertical
	11480.5	30.7	17.6	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9644.5	32.0	13.5	45.5	68.2	-22.7	Peak	Horizontal
*	10103.5	31.7	13.9	45.6	68.2	-22.6	Peak	Horizontal
	10919.5	31.5	16.7	48.2	74.0	-25.8	Peak	Horizontal
	11718.5	30.3	17.8	48.1	74.0	-25.9	Peak	Horizontal
*	9865.5	32.2	13.5	45.7	68.2	-22.5	Peak	Vertical
*	10469.0	31.2	15.3	46.5	68.2	-21.7	Peak	Vertical
	10826.0	30.2	16.4	46.6	74.0	-27.4	Peak	Vertical
	11701.5	30.9	17.5	48.4	74.0	-25.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9661.5	32.9	13.5	46.4	68.2	-21.8	Peak	Horizontal
*	10384.0	31.3	15.1	46.4	68.2	-21.8	Peak	Horizontal
	11132.0	30.4	16.3	46.7	74.0	-27.3	Peak	Horizontal
	12169.0	31.1	17.4	48.5	74.0	-25.5	Peak	Horizontal
*	9755.0	33.2	13.4	46.6	68.2	-21.6	Peak	Vertical
*	10171.5	30.5	14.1	44.6	68.2	-23.6	Peak	Vertical
	10894.0	30.4	16.4	46.8	74.0	-27.2	Peak	Vertical
	11378.5	29.3	17.3	46.6	74.0	-27.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	31.6	13.5	45.1	68.2	-23.1	Peak	Horizontal
*	10435.0	30.7	15.5	46.2	68.2	-22.0	Peak	Horizontal
	10996.0	31.8	16.5	48.3	74.0	-25.7	Peak	Horizontal
	11582.5	32.4	17.5	49.9	74.0	-24.1	Peak	Horizontal
*	9857.0	31.6	13.5	45.1	68.2	-23.1	Peak	Vertical
*	10265.0	30.9	14.6	45.5	68.2	-22.7	Peak	Vertical
	11574.0	30.7	17.7	48.4	74.0	-25.6	Peak	Vertical
	12220.0	30.5	17.5	48.0	74.0	-26.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9780.5	32.9	13.6	46.5	68.2	-21.7	Peak	Horizontal
*	10528.5	31.9	15.3	47.2	68.2	-21.0	Peak	Horizontal
	10877.0	29.9	16.3	46.2	74.0	-27.8	Peak	Horizontal
	11327.5	28.9	17.4	46.3	74.0	-27.7	Peak	Horizontal
*	9814.5	33.1	13.7	46.8	68.2	-21.4	Peak	Vertical
*	10469.0	32.5	15.3	47.8	68.2	-20.4	Peak	Vertical
	10987.5	30.6	16.4	47.0	74.0	-27.0	Peak	Vertical
	11489.0	29.9	17.7	47.6	74.0	-26.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	32.2	13.5	45.7	68.2	-22.5	Peak	Horizontal
*	10358.5	31.5	15.1	46.6	68.2	-21.6	Peak	Horizontal
	10996.0	30.9	16.5	47.4	74.0	-26.6	Peak	Horizontal
	11616.5	31.3	17.4	48.7	74.0	-25.3	Peak	Horizontal
*	9899.5	30.9	13.6	44.5	68.2	-23.7	Peak	Vertical
*	10273.5	30.7	14.7	45.4	68.2	-22.8	Peak	Vertical
	10979.0	30.1	16.2	46.3	74.0	-27.7	Peak	Vertical
	11608.0	31.7	17.2	48.9	74.0	-25.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	10129.0	33.2	14.2	47.4	68.2	-20.8	Peak	Horizontal
*	10537.0	31.5	15.2	46.7	68.2	-21.5	Peak	Horizontal
	11497.5	30.8	17.6	48.4	74.0	-25.6	Peak	Horizontal
	12135.0	30.5	17.3	47.8	74.0	-26.2	Peak	Horizontal
*	9746.5	33.0	13.4	46.4	68.2	-21.8	Peak	Vertical
*	10384.0	31.9	15.1	47.0	68.2	-21.2	Peak	Vertical
	10860.0	30.4	16.4	46.8	74.0	-27.2	Peak	Vertical
	12135.0	30.5	17.3	47.8	74.0	-26.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10120.5	31.0	14.1	45.1	68.2	-23.1	Peak	Horizontal
*	10384.0	31.9	15.1	47.0	68.2	-21.2	Peak	Horizontal
	11234.0	29.9	17.0	46.9	74.0	-27.1	Peak	Horizontal
	11990.5	29.9	17.1	47.0	74.0	-27.0	Peak	Horizontal
*	9984.5	32.0	13.8	45.8	68.2	-22.4	Peak	Vertical
*	10426.5	30.4	15.4	45.8	68.2	-22.4	Peak	Vertical
	11276.5	29.2	17.0	46.2	74.0	-27.8	Peak	Vertical
	11735.5	29.7	17.7	47.4	74.0	-26.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT40 – Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	31.0	13.5	44.5	68.2	-23.7	Peak	Horizontal
*	10401.0	29.8	15.1	44.9	68.2	-23.3	Peak	Horizontal
	11344.5	29.8	17.3	47.1	74.0	-26.9	Peak	Horizontal
	12075.5	31.0	16.9	47.9	74.0	-26.1	Peak	Horizontal
*	9857.0	31.8	13.5	45.3	68.2	-22.9	Peak	Vertical
*	10401.0	31.4	15.1	46.5	68.2	-21.7	Peak	Vertical
	11344.5	30.0	17.3	47.3	74.0	-26.7	Peak	Vertical
	12075.5	31.0	16.9	47.9	74.0	-26.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9721.0	32.5	13.5	46.0	68.2	-22.2	Peak	Horizontal
*	10129.0	32.5	14.2	46.7	68.2	-21.5	Peak	Horizontal
	10877.0	29.9	16.3	46.2	74.0	-27.8	Peak	Horizontal
	11744.0	31.0	17.6	48.6	74.0	-25.4	Peak	Horizontal
*	9942.0	31.7	13.8	45.5	68.2	-22.7	Peak	Vertical
*	10443.5	31.2	15.5	46.7	68.2	-21.5	Peak	Vertical
	11251.0	30.7	17.2	47.9	74.0	-26.1	Peak	Vertical
	11642.0	32.5	17.9	50.4	74.0	-23.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9755.0	32.4	13.4	45.8	68.2	-22.4	Peak	Horizontal
*	10418.0	31.1	15.2	46.3	68.2	-21.9	Peak	Horizontal
	11353.0	30.9	17.2	48.1	74.0	-25.9	Peak	Horizontal
	11625.0	31.1	17.6	48.7	74.0	-25.3	Peak	Horizontal
*	9806.0	33.0	13.8	46.8	68.2	-21.4	Peak	Vertical
*	10486.0	32.5	15.4	47.9	68.2	-20.3	Peak	Vertical
	11123.5	32.0	16.4	48.4	74.0	-25.6	Peak	Vertical
	11642.0	30.7	17.9	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9789.0	31.7	13.6	45.3	68.2	-22.9	Peak	Horizontal
*	10333.0	31.3	15.1	46.4	68.2	-21.8	Peak	Horizontal
	10902.5	31.6	16.6	48.2	74.0	-25.8	Peak	Horizontal
	11327.5	29.2	17.4	46.6	74.0	-27.4	Peak	Horizontal
*	9942.0	31.0	13.8	44.8	68.2	-23.4	Peak	Vertical
*	10460.5	31.9	15.3	47.2	68.2	-21.0	Peak	Vertical
	11557.0	30.4	17.9	48.3	74.0	-25.7	Peak	Vertical
	12237.0	30.9	17.5	48.4	74.0	-25.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9772.0	31.6	13.5	45.1	68.2	-23.1	Peak	Horizontal
*	10205.5	32.1	14.3	46.4	68.2	-21.8	Peak	Horizontal
	10902.5	32.1	16.6	48.7	74.0	-25.3	Peak	Horizontal
	11531.5	30.9	17.3	48.2	74.0	-25.8	Peak	Horizontal
*	9814.5	32.0	13.7	45.7	68.2	-22.5	Peak	Vertical
*	10375.5	30.7	15.1	45.8	68.2	-22.4	Peak	Vertical
	11506.0	29.1	17.4	46.5	74.0	-27.5	Peak	Vertical
	12092.5	30.3	16.9	47.2	74.0	-26.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9814.5	31.7	13.7	45.4	68.2	-22.8	Peak	Horizontal
*	10477.5	31.5	15.3	46.8	68.2	-21.4	Peak	Horizontal
	11336.0	30.5	17.4	47.9	74.0	-26.1	Peak	Horizontal
	12177.5	30.3	17.7	48.0	74.0	-26.0	Peak	Horizontal
*	10103.5	32.2	13.9	46.1	68.2	-22.1	Peak	Vertical
*	10384.0	31.8	15.1	46.9	68.2	-21.3	Peak	Vertical
	11531.5	31.0	17.3	48.3	74.0	-25.7	Peak	Vertical
	12101.0	31.6	16.9	48.5	74.0	-25.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9712.5	31.6	13.5	45.1	68.2	-23.1	Peak	Horizontal
*	10103.5	32.2	13.9	46.1	68.2	-22.1	Peak	Horizontal
	11285.0	30.1	16.9	47.0	74.0	-27.0	Peak	Horizontal
	12203.0	30.2	17.7	47.9	74.0	-26.1	Peak	Horizontal
*	9593.5	31.2	13.3	44.5	68.2	-23.7	Peak	Vertical
*	10035.5	32.0	13.9	45.9	68.2	-22.3	Peak	Vertical
	10911.0	30.7	16.6	47.3	74.0	-26.7	Peak	Vertical
	11888.5	30.0	17.3	47.3	74.0	-26.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT80 – Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB/m)	Detector	Polarization
*	9874.0	30.7	13.6	44.3	68.2	-23.9	Peak	Horizontal
*	10435.0	30.9	15.5	46.4	68.2	-21.8	Peak	Horizontal
	10953.5	31.2	16.3	47.5	74.0	-26.5	Peak	Horizontal
	11625.0	30.4	17.6	48.0	74.0	-26.0	Peak	Horizontal
*	9814.5	32.4	13.7	46.1	68.2	-22.1	Peak	Vertical
*	10129.0	31.4	14.2	45.6	68.2	-22.6	Peak	Vertical
	10919.5	30.9	16.7	47.6	74.0	-26.4	Peak	Vertical
	11718.5	31.4	17.8	49.2	74.0	-24.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9848.5	32.1	13.5	45.6	68.2	-22.6	Peak	Horizontal
*	10273.5	32.5	14.7	47.2	68.2	-21.0	Peak	Horizontal
	11387.0	30.5	17.4	47.9	74.0	-26.1	Peak	Horizontal
	12143.5	30.4	17.3	47.7	74.0	-26.3	Peak	Horizontal
*	9653.0	32.1	13.5	45.6	68.2	-22.6	Peak	Vertical
*	10078.0	31.5	13.7	45.2	68.2	-23.0	Peak	Vertical
	11548.5	30.8	17.7	48.5	74.0	-25.5	Peak	Vertical
	12194.5	29.7	17.8	47.5	74.0	-26.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT160 – Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9857.0	30.8	13.5	44.3	68.2	-23.9	Peak	Horizontal
*	10307.5	31.1	14.9	46.0	68.2	-22.2	Peak	Horizontal
	10970.5	29.3	16.2	45.5	74.0	-28.5	Peak	Horizontal
	11897.0	30.4	17.4	47.8	74.0	-26.2	Peak	Horizontal
*	9908.0	31.7	13.6	45.3	68.2	-22.9	Peak	Vertical
*	10350.0	30.5	15.2	45.7	68.2	-22.5	Peak	Vertical
	11429.5	30.3	17.3	47.6	74.0	-26.4	Peak	Vertical
	11795.0	29.8	17.7	47.5	74.0	-26.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Karl Gao
Test Date	2024-01-25 ~ 2024-01-26	Test Mode	802.11be-EHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9891.0	32.2	13.7	45.9	68.2	-22.3	Peak	Horizontal
*	10460.5	31.0	15.3	46.3	68.2	-21.9	Peak	Horizontal
	11174.5	31.0	17.0	48.0	74.0	-26.0	Peak	Horizontal
	11582.5	30.1	17.5	47.6	74.0	-26.4	Peak	Horizontal
*	10095.0	31.7	13.8	45.5	68.2	-22.7	Peak	Vertical
*	10384.0	31.0	15.1	46.1	68.2	-22.1	Peak	Vertical
	11251.0	30.7	17.2	47.9	74.0	-26.1	Peak	Vertical
	11633.5	30.9	17.7	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

ANT 312# Puncturing Mode

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2024-04-17	Test Mode	802.11be-EHT80-Channel 42 4_242
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9882.5	32.3	13.5	45.8	68.2	-22.4	Peak	Horizontal
	11157.5	32.1	16.7	48.8	74.0	-25.2	Peak	Horizontal
	12492.0	31.4	16.2	47.6	74.0	-26.4	Peak	Horizontal
*	13682.0	29.4	17.8	47.2	68.2	-21.0	Peak	Horizontal
*	10460.5	31.1	15.0	46.1	68.2	-22.1	Peak	Vertical
	11174.5	30.8	16.9	47.7	74.0	-26.3	Peak	Vertical
	12534.5	31.7	16.5	48.2	74.0	-25.8	Peak	Vertical
*	13410.0	31.4	18.2	49.6	68.2	-18.6	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission for 9kHz ~ 30MHz:

Site: WZ-AC2	Test Date: 2024-03-10
Limit: FCC_Part15.209_RSE	Engineer: Karl Gao
Probe: FMZB1519_0.009-30MHz	Polarity: Coaxial
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

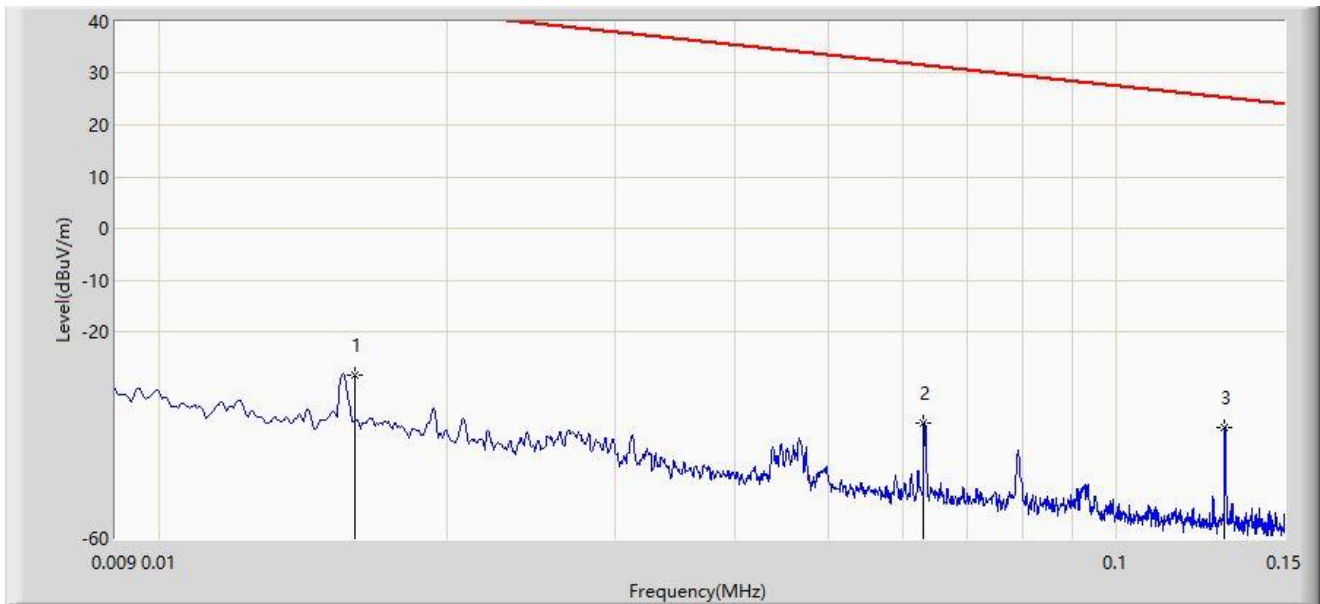

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		0.016	-28.289	31.525	-71.794	43.505	-59.813	PK
2		0.063	-37.721	24.304	-69.329	31.607	-62.025	PK
3	*	0.130	-38.525	23.622	-63.843	25.319	-62.147	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC2	Test Date: 2024-03-10
Limit: FCC_Part15.209_RSE	Engineer: Karl Gao
Probe: FMZB1519_0.009-30MHz	Polarity: Coaxial
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

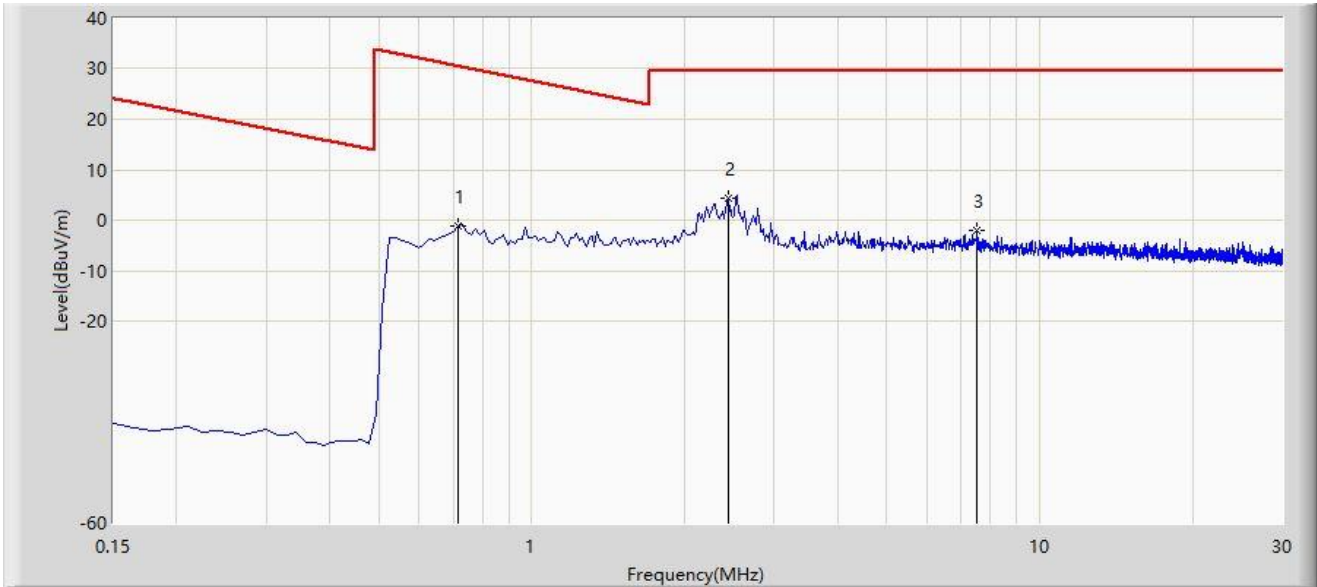

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		0.717	-1.110	20.708	-31.613	30.503	-21.818	PK
2	*	2.434	4.231	26.045	-25.269	29.500	-21.814	PK
3		7.523	-1.966	19.980	-31.466	29.500	-21.946	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC2	Test Date: 2024-03-10
Limit: FCC_Part15.209_RSE	Engineer: Karl Gao
Probe: FMZB1519_0.009-30MHz	Polarity: Coplanar
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

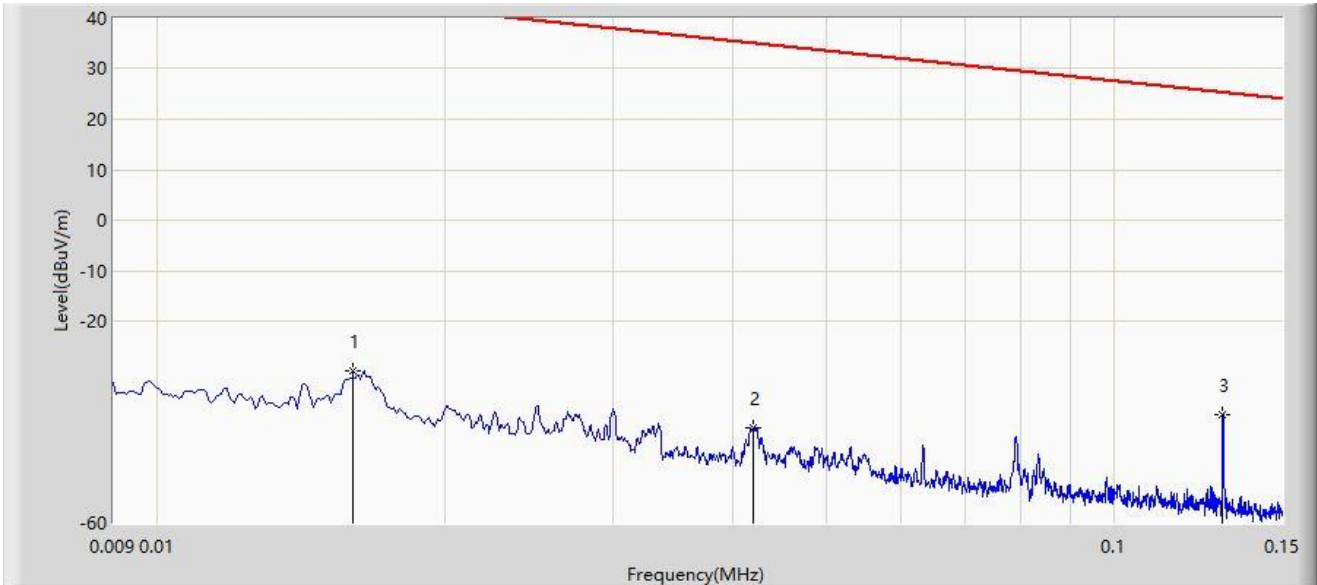

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		0.016	-29.762	30.052	-73.267	43.505	-59.813	PK
2		0.042	-41.026	20.875	-76.153	35.127	-61.901	PK
3	*	0.130	-38.545	23.602	-63.863	25.319	-62.147	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC2	Test Date: 2024-03-10
Limit: FCC_Part15.209_RSE	Engineer: Karl Gao
Probe: FMZB1519_0.009-30MHz	Polarity: Coplanar
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

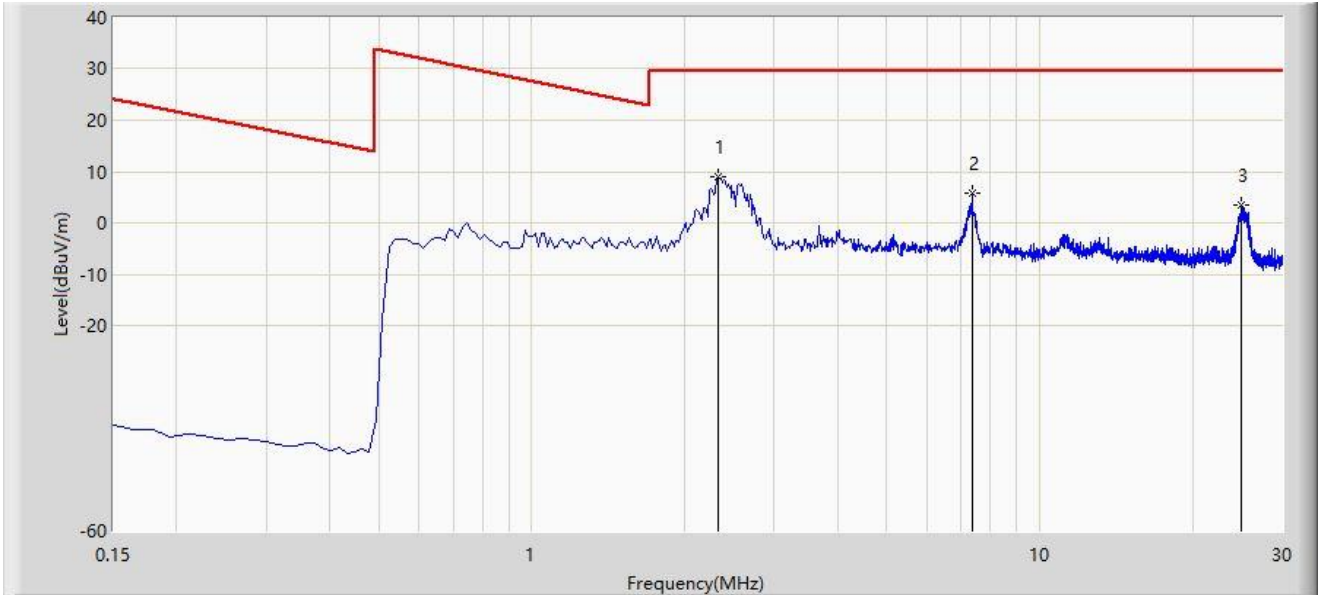

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2.329	8.920	30.740	-20.580	29.500	-21.821	PK
2		7.344	5.688	27.636	-23.812	29.500	-21.948	PK
3		24.970	3.569	25.653	-25.931	29.500	-22.084	PK

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

The Result of Radiated Emission for 30MHz ~ 1GHz:

Site: WZ-AC2	Test Date: 2024-01-30
Limit: FCC_Part15.209_RSE(3m)	Engineer: Karl Gao
Probe: VULB9162_30-7000MHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

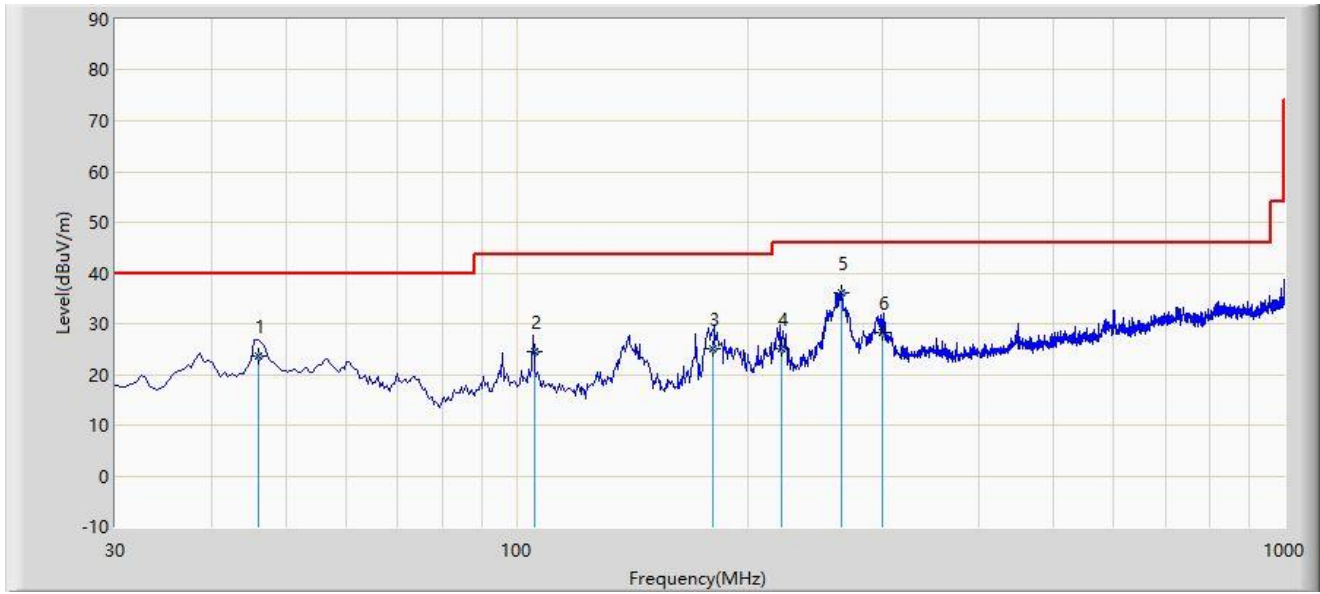


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		46.100	23.631	3.200	-16.369	40.000	20.431	QP
2		105.700	24.429	5.900	-19.071	43.500	18.528	QP
3		180.200	25.203	8.400	-18.297	43.500	16.803	QP
4		221.500	25.182	6.300	-20.818	46.000	18.882	QP
5	*	264.500	36.070	15.700	-9.930	46.000	20.370	QP
6		300.100	28.293	7.300	-17.707	46.000	20.992	QP

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-01-30
Limit: FCC_Part15.209_RSE(3m)	Engineer: Karl Gao
Probe: VULB9162_30-7000MHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

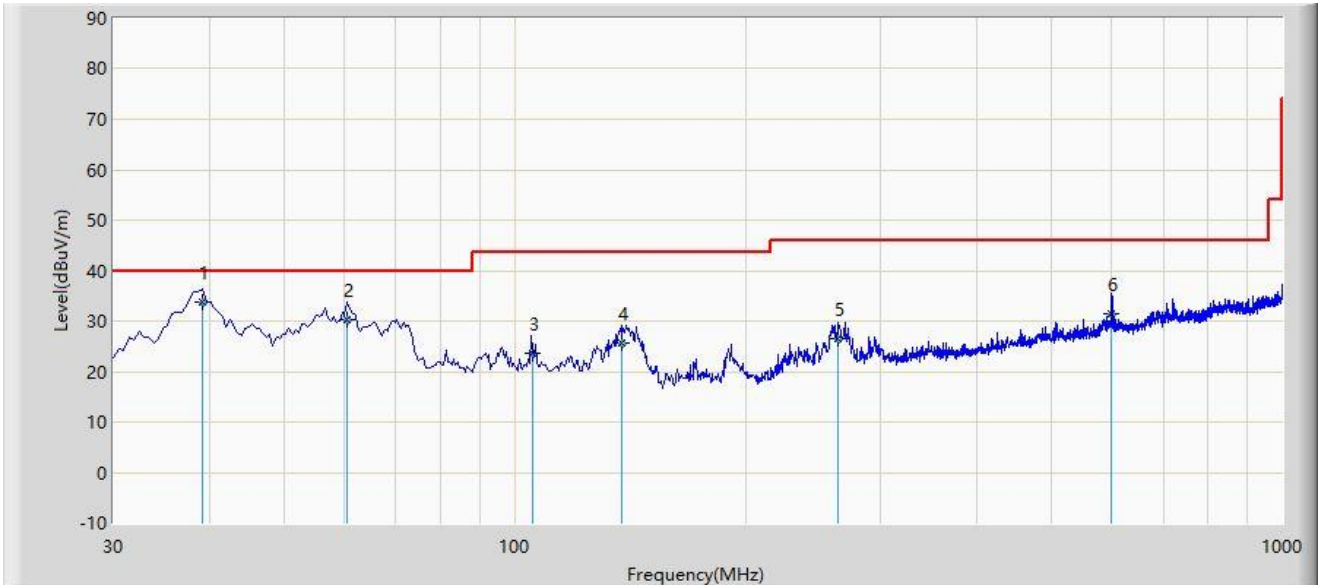

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	39.200	33.714	14.900	-6.286	40.000	18.814	QP
2		60.400	30.417	11.200	-9.583	40.000	19.217	QP
3		105.700	23.629	5.100	-19.871	43.500	18.528	QP
4		137.800	25.556	10.400	-17.944	43.500	15.157	QP
5		263.700	26.511	6.100	-19.489	46.000	20.410	QP
6		599.400	31.468	3.900	-14.532	46.000	27.568	QP


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

The Result of Radiated Emission for above 18GHz:

Site: WZ-AC2	Test Date: 2024-01-30
Limit: FCC_Part15.209_RSE(3m)	Engineer: Karl Gao
Probe: BBHA9170_549_18-40GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

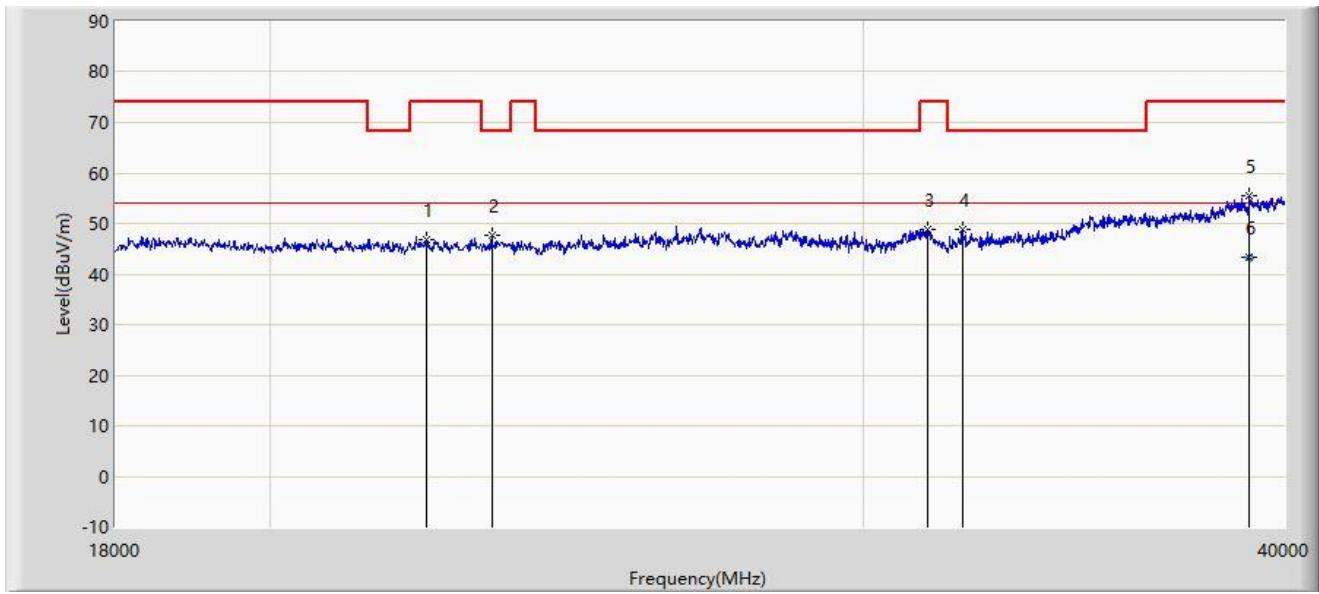

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		22268.000	46.719	54.144	-27.281	74.000	-7.425	PK
2		23280.000	47.645	54.867	-20.555	68.200	-7.222	PK
3		31365.000	48.910	55.588	-25.090	74.000	-6.679	PK
4		32102.000	48.871	55.947	-19.329	68.200	-7.076	PK
5		39065.000	55.483	56.303	-18.517	74.000	-0.820	PK
6	*	39065.000	43.477	44.297	-10.523	54.000	-0.820	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

Site: WZ-AC2	Test Date: 2024-01-30
Limit: FCC_Part15.209_RSE(3m)	Engineer: Karl Gao
Probe: BBHA9170_549_18-40GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

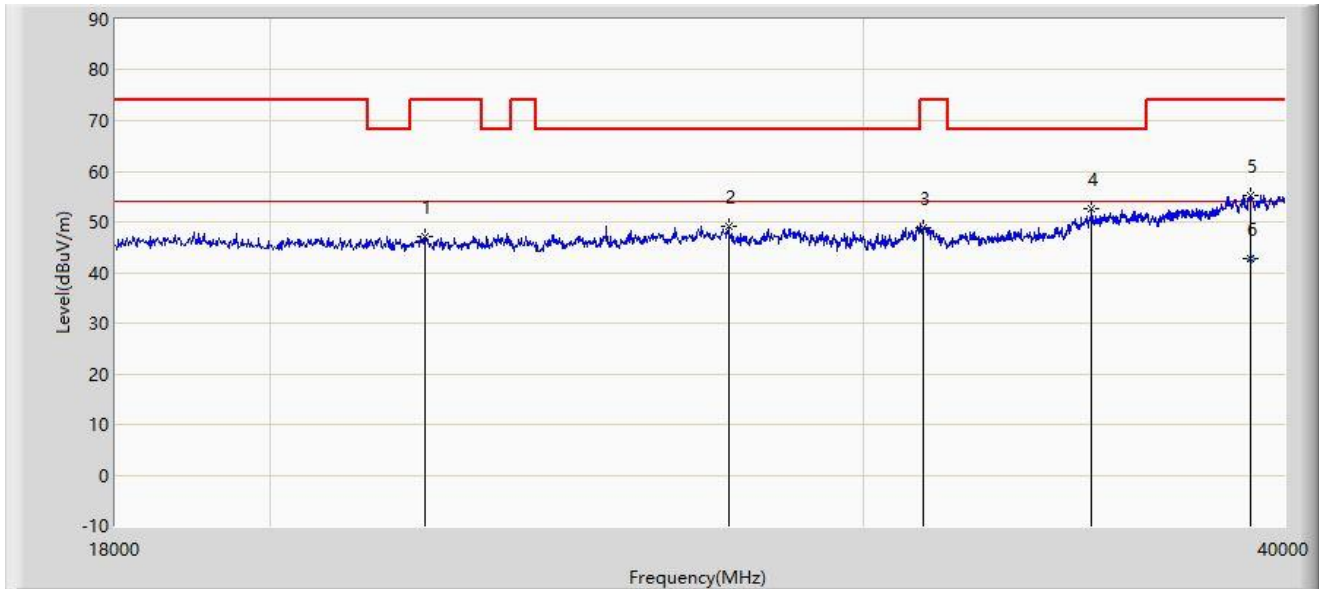

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		22235.000	47.026	55.115	-26.974	74.000	-8.089	PK
2		27372.000	49.003	55.744	-19.197	68.200	-6.741	PK
3		31255.000	48.885	54.552	-25.115	74.000	-5.667	PK
4		35072.000	52.496	58.196	-15.704	68.200	-5.700	PK
5		39076.000	55.111	55.832	-18.889	74.000	-0.721	PK
6	*	39076.000	42.643	43.364	-11.357	54.000	-0.721	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

A.8 Radiated Restricted Band Edge Test Result

ANT 311# Normal Mode:

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

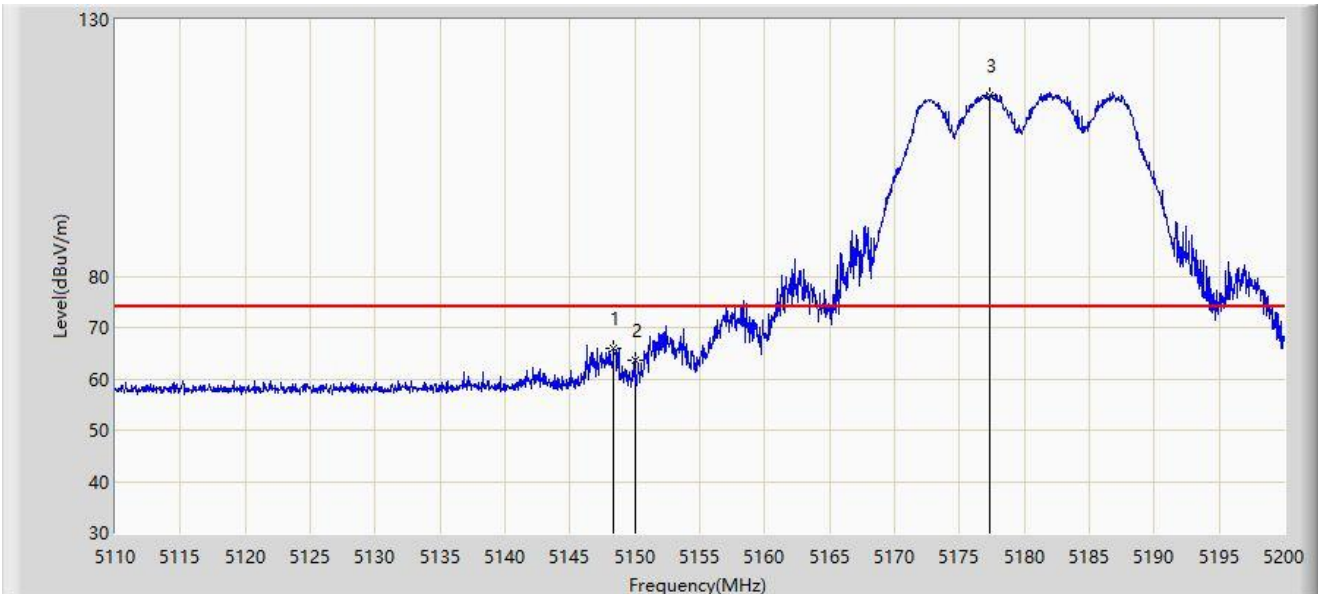

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.340	65.885	62.408	-8.115	74.000	3.476	PK
2		5150.000	63.690	60.208	-10.310	74.000	3.482	PK
3		5177.365	115.331	112.009	N/A	N/A	3.323	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5150.000	48.705	45.223	-5.295	54.000	3.482	AV
2		5177.410	107.299	103.978	N/A	N/A	3.322	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

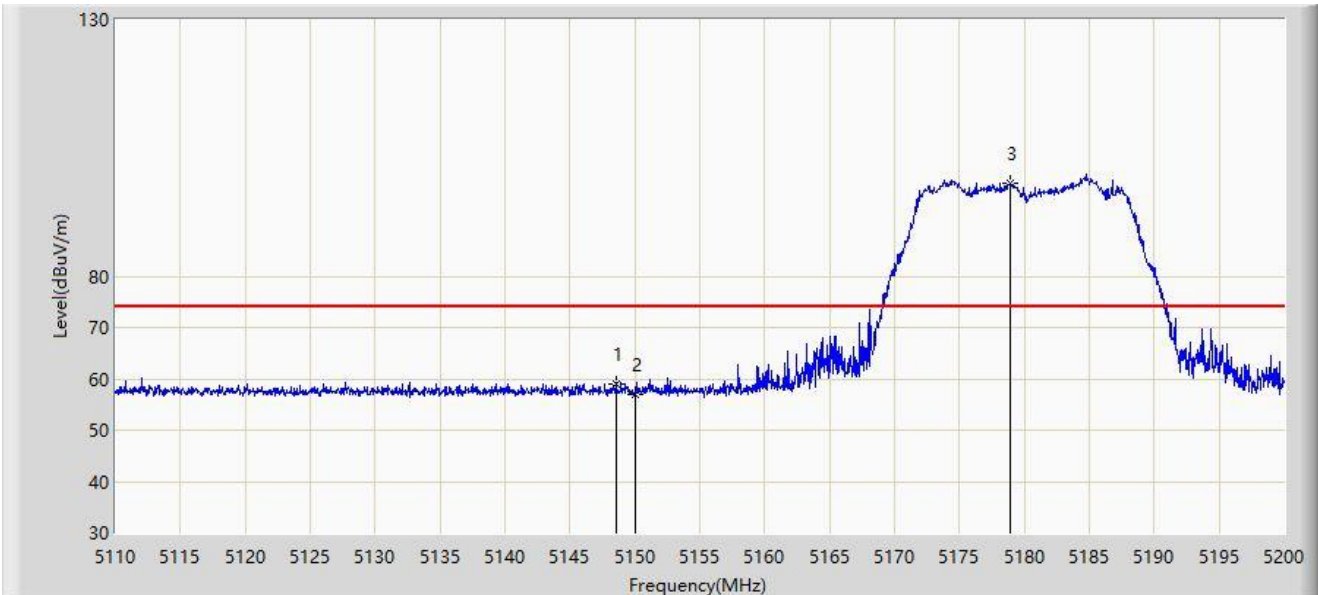


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.520	59.116	55.639	-14.884	74.000	3.477	PK
2		5150.000	57.017	53.535	-16.983	74.000	3.482	PK
3		5178.940	97.988	94.697	N/A	N/A	3.291	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

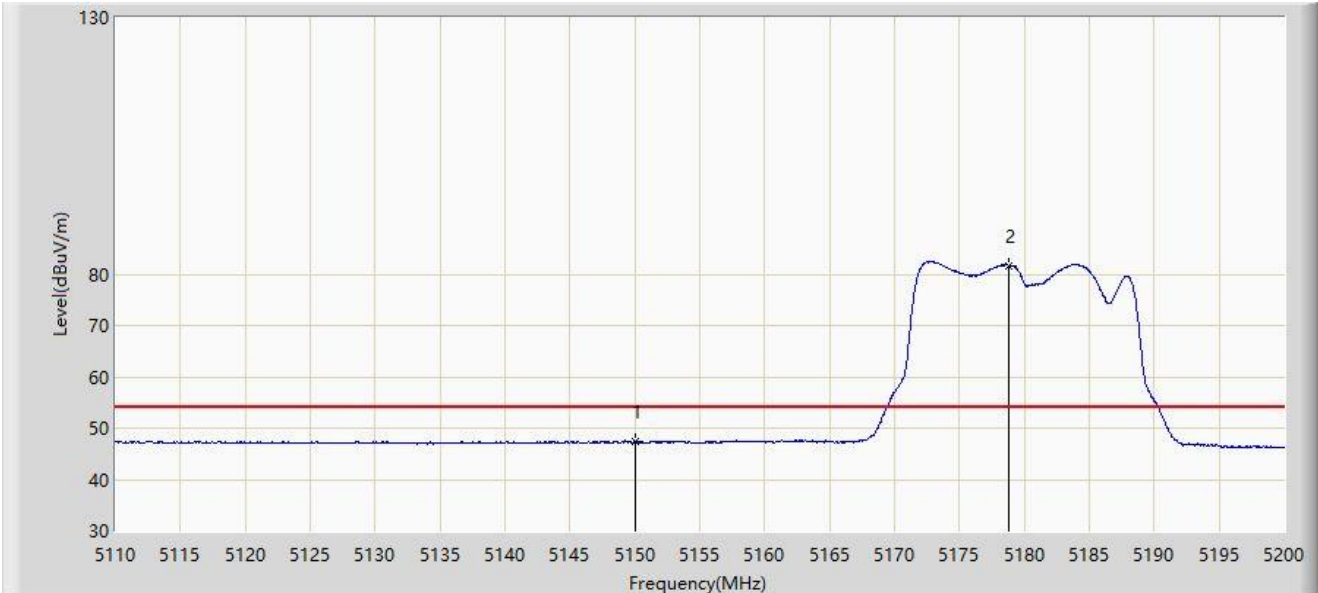


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5150.000	47.271	43.789	-6.729	54.000	3.482	AV
2		5178.805	81.710	78.416	N/A	N/A	3.294	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

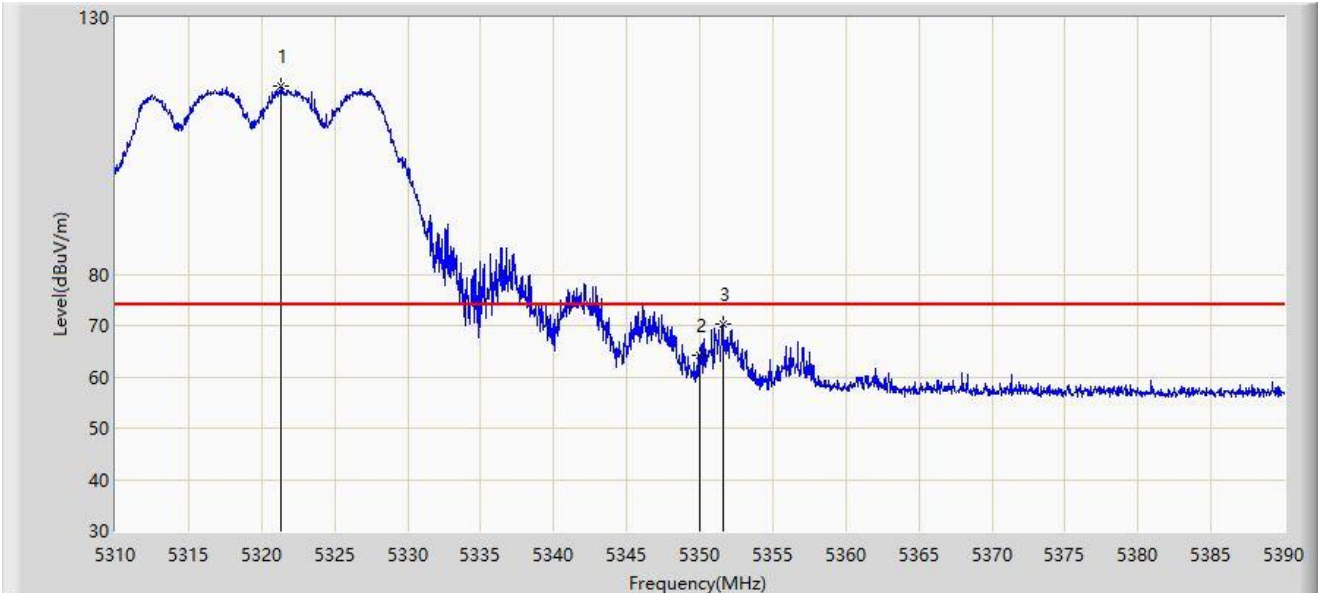


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5321.280	116.687	113.682	N/A	N/A	3.005	PK
2		5350.000	64.342	61.522	-9.658	74.000	2.820	PK
3	*	5351.560	70.239	67.445	-3.761	74.000	2.793	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

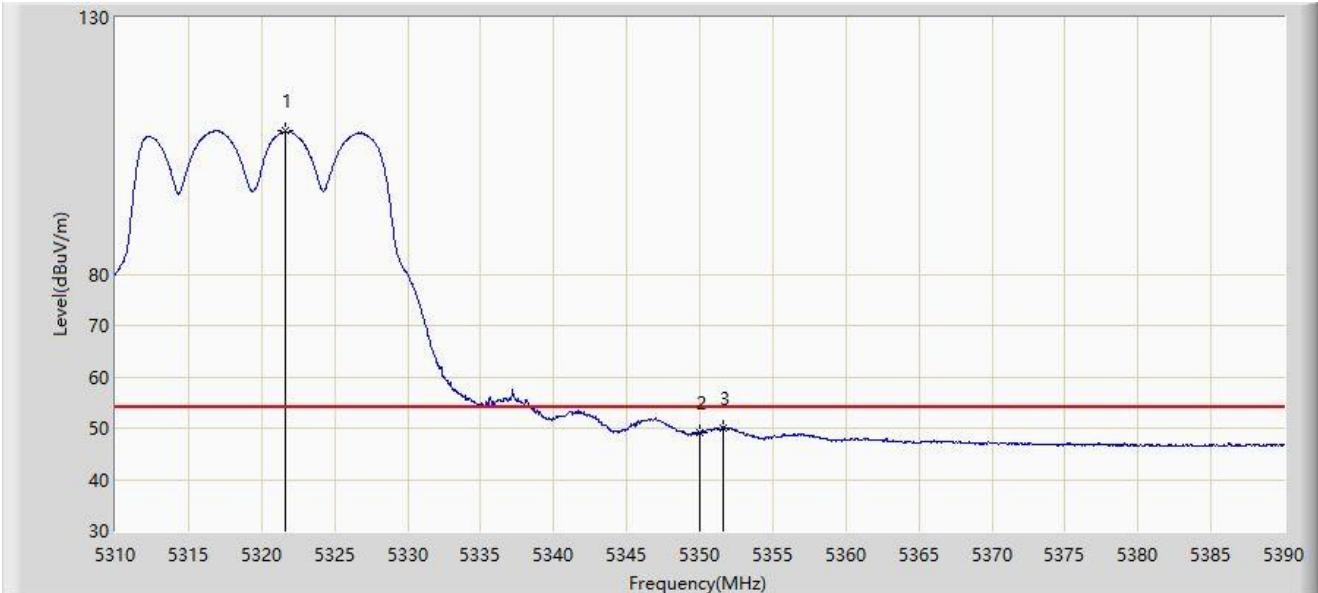


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5321.600	107.864	104.859	N/A	N/A	3.004	AV
2		5350.000	49.179	46.359	-4.821	54.000	2.820	AV
3	*	5351.560	50.058	47.264	-3.942	54.000	2.793	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

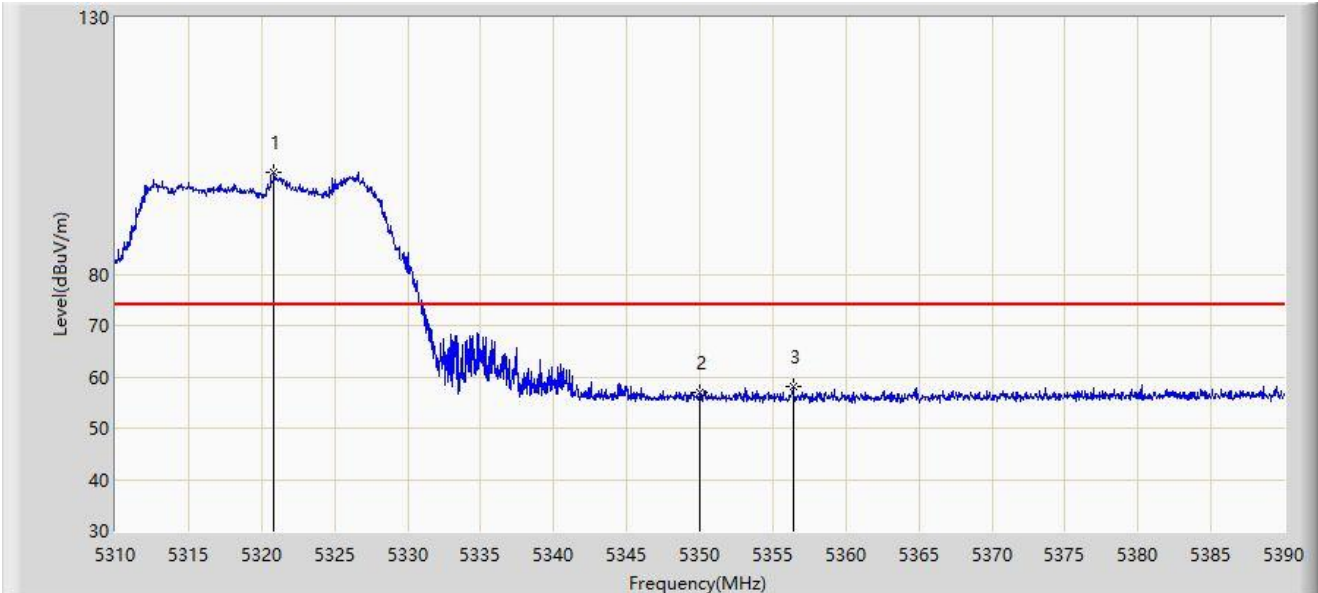


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5320.840	99.998	96.992	N/A	N/A	3.006	PK
2		5350.000	57.045	54.225	-16.955	74.000	2.820	PK
3	*	5356.400	58.106	55.300	-15.894	74.000	2.806	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

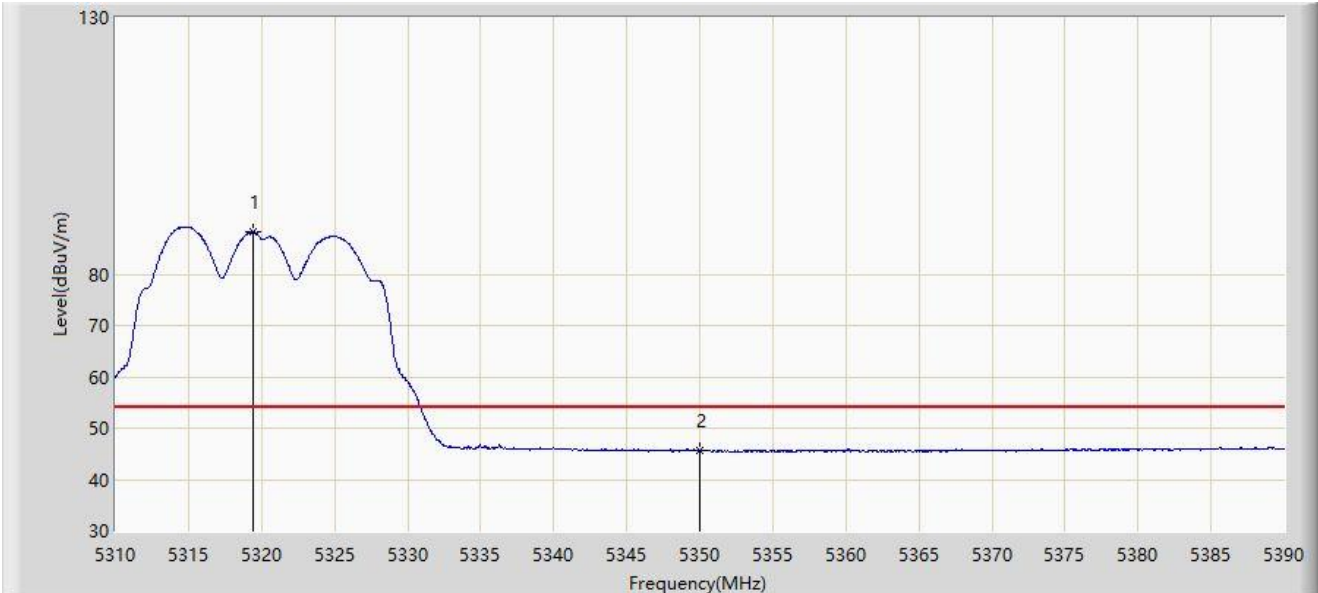

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5319.400	88.243	85.235	N/A	N/A	3.008	AV
2	*	5350.000	45.565	42.745	-8.435	54.000	2.820	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	



No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5460.000	57.094	53.945	-16.906	74.000	3.149	PK
2		5468.520	66.634	63.321	-1.566	68.200	3.313	PK
3	*	5470.000	66.762	63.420	-1.438	68.200	3.341	PK
4		5496.465	114.374	111.094	N/A	N/A	3.281	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	47.110	43.961	-6.890	54.000	3.149	AV
2		5500.875	105.693	102.514	N/A	N/A	3.179	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

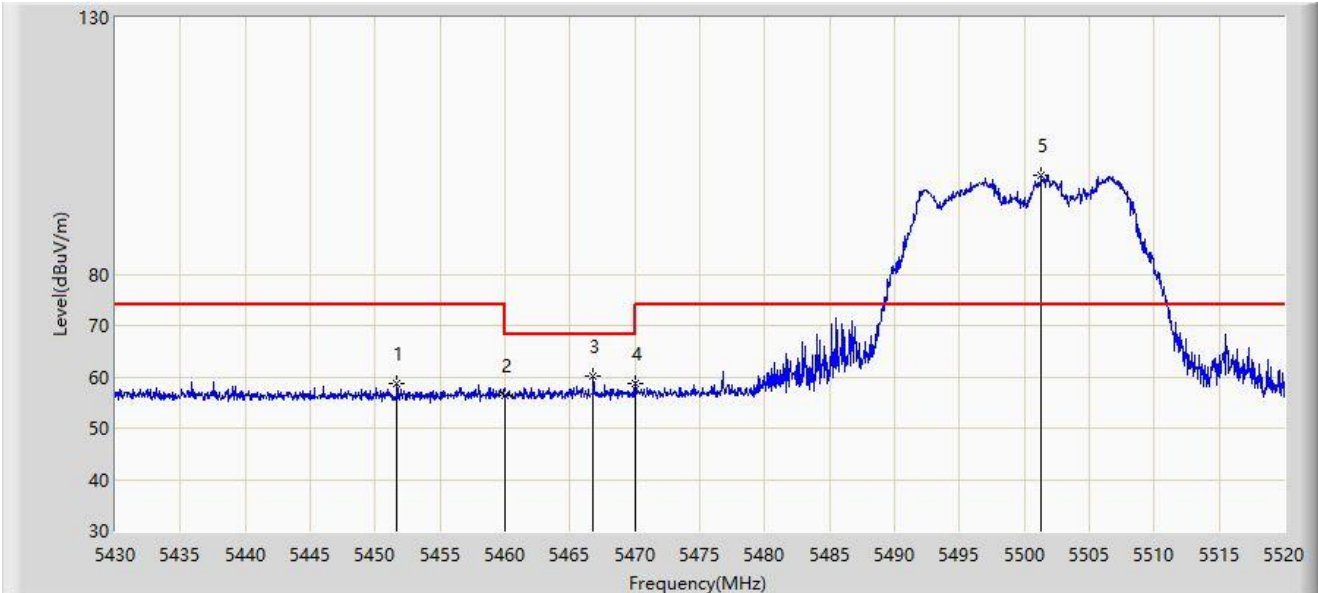


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5451.690	58.669	55.607	-15.331	74.000	3.062	PK
2		5460.000	56.252	53.103	-17.748	74.000	3.149	PK
3	*	5466.810	60.105	56.825	-8.095	68.200	3.280	PK
4		5470.000	58.641	55.299	-9.559	68.200	3.341	PK
5		5501.280	99.315	96.138	N/A	N/A	3.177	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

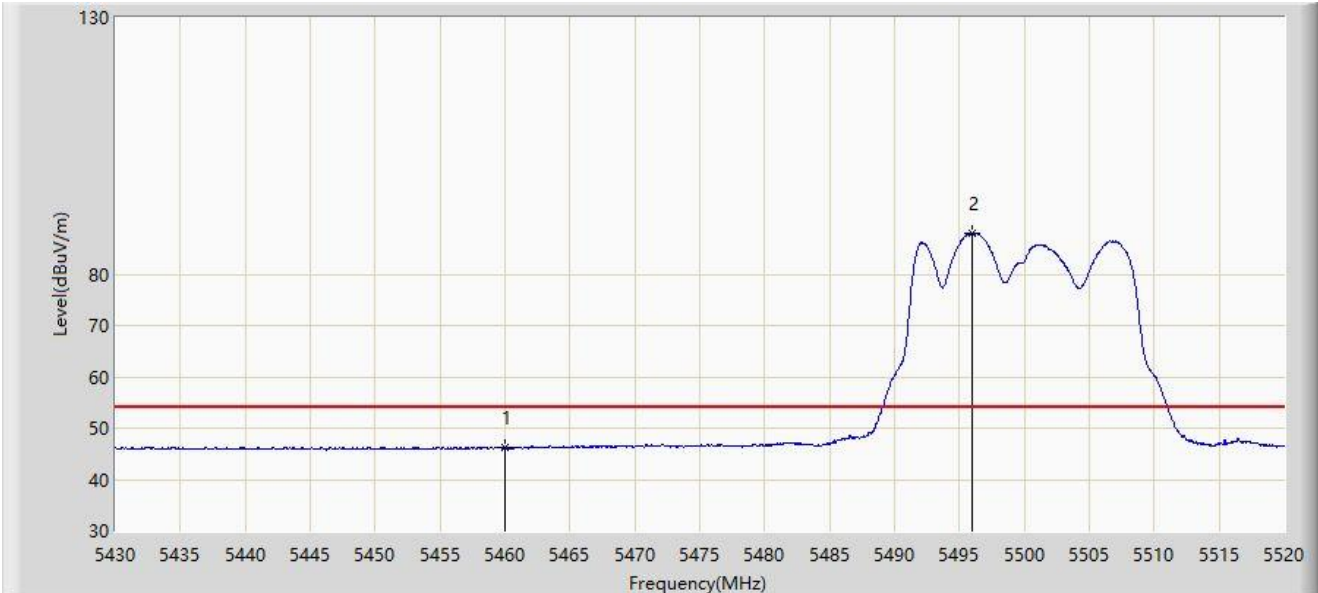


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	46.088	42.939	-7.912	54.000	3.149	AV
2		5496.015	88.078	84.864	N/A	N/A	3.214	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5700MHz	

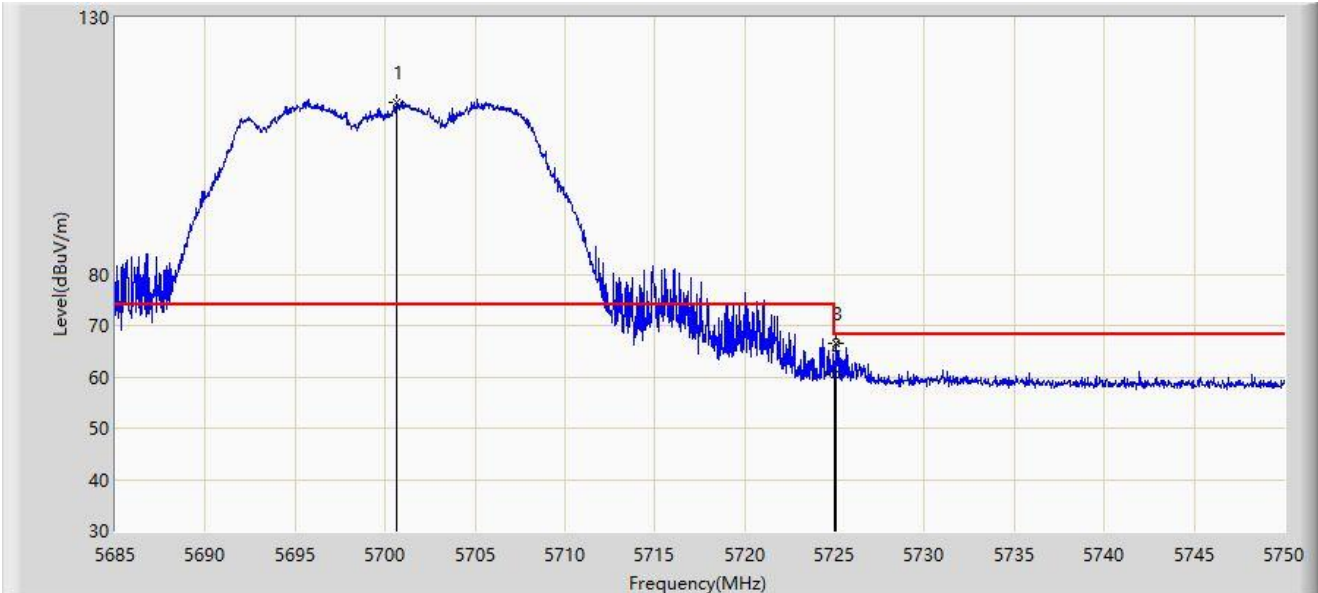


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5700.632	113.515	109.069	N/A	N/A	4.446	PK
2		5725.000	60.453	55.750	-7.747	68.200	4.703	PK
3	*	5725.072	66.486	61.782	-1.714	68.200	4.703	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5700MHz	

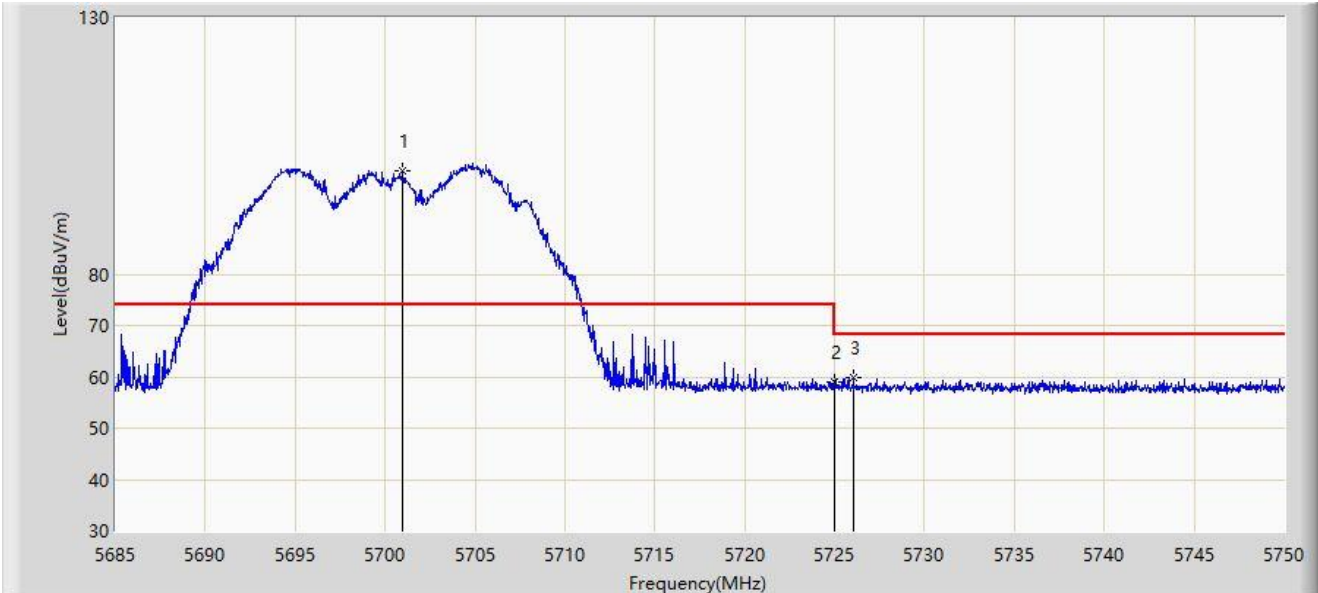


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5700.958	100.049	95.598	N/A	N/A	4.451	PK
2		5725.000	59.064	54.361	-9.136	68.200	4.703	PK
3	*	5726.047	59.751	55.040	-8.449	68.200	4.710	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5745MHz	

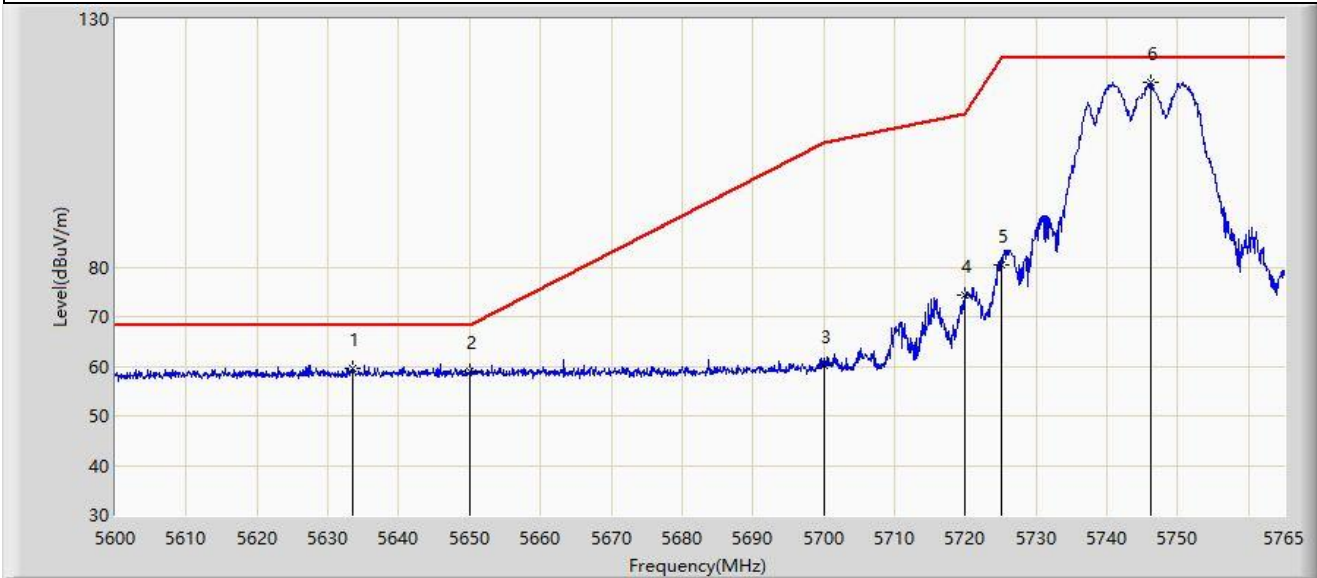


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5633.413	59.659	55.589	-8.541	68.200	4.070	PK
2		5650.000	59.062	54.939	-9.138	68.200	4.122	PK
3		5700.000	60.199	55.762	-45.001	105.200	4.437	PK
4		5720.000	74.320	69.656	-36.480	110.800	4.663	PK
5		5725.000	80.390	75.687	-41.810	122.200	4.703	PK
6		5746.272	117.236	112.800	N/A	N/A	4.436	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5745MHz	

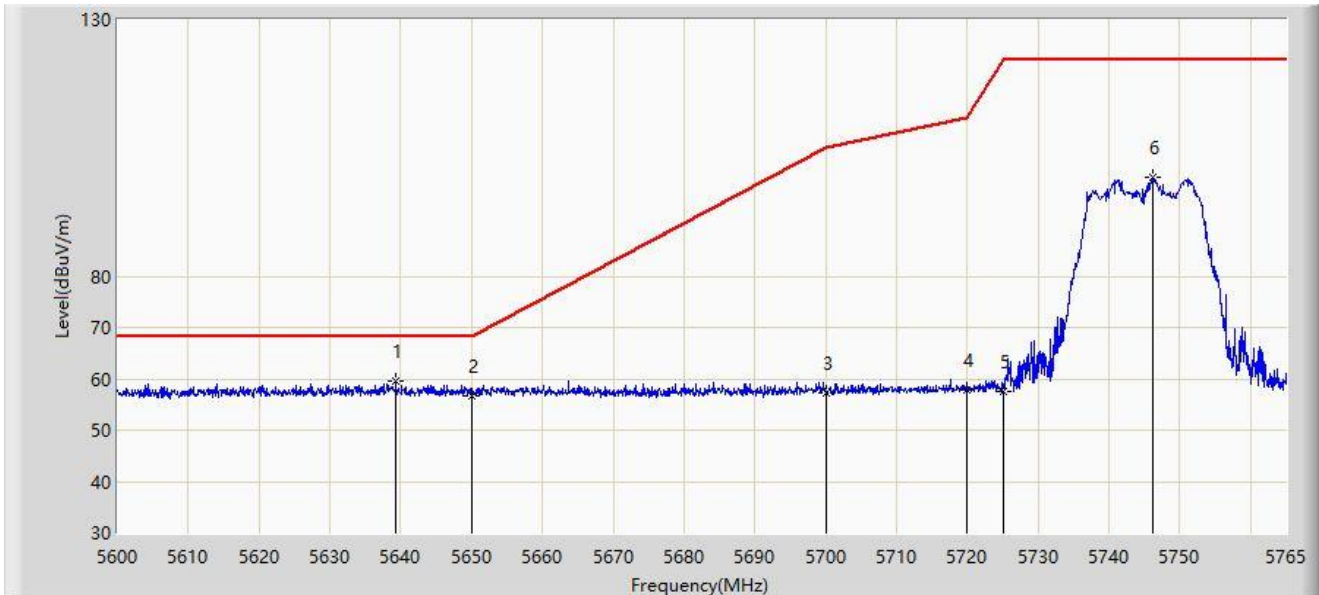


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5639.270	59.637	55.493	-8.563	68.200	4.143	PK
2		5650.000	56.776	52.653	-11.424	68.200	4.122	PK
3		5700.000	57.325	52.888	-47.875	105.200	4.437	PK
4		5720.000	57.942	53.278	-52.858	110.800	4.663	PK
5		5725.000	57.656	52.953	-64.544	122.200	4.703	PK
6		5746.272	99.229	94.793	N/A	N/A	4.436	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5825Hz	

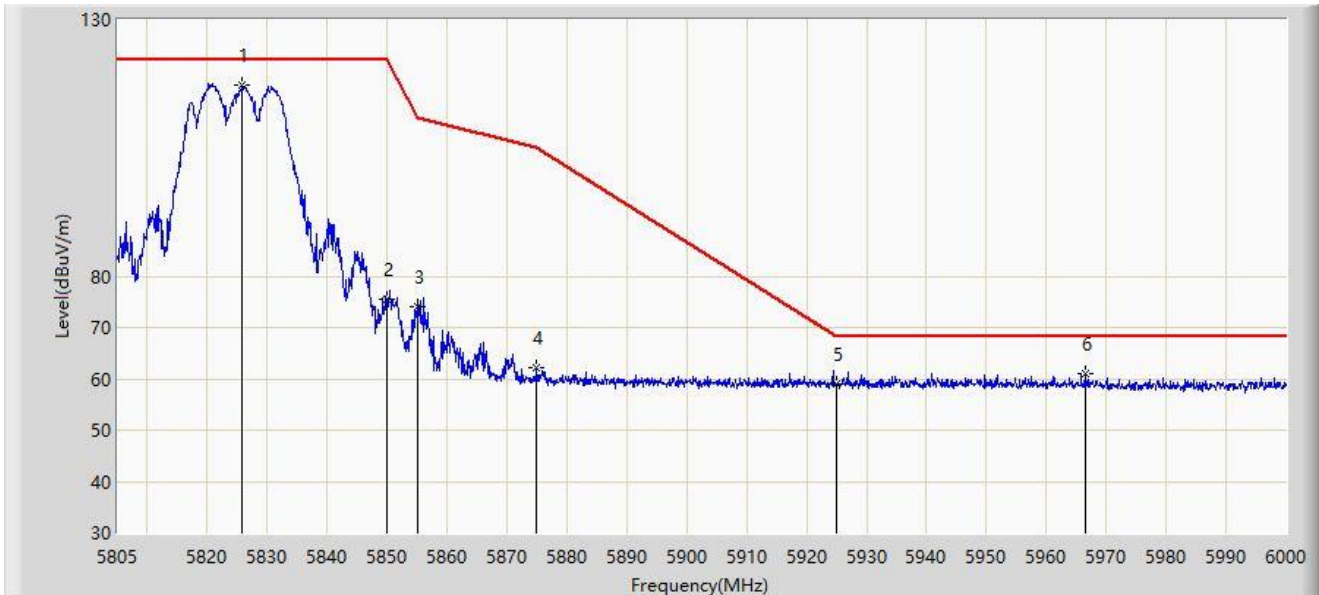


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5825.865	117.308	112.453	N/A	N/A	4.855	PK
2		5850.000	75.404	70.421	-46.796	122.200	4.984	PK
3		5855.000	74.106	69.068	-36.694	110.800	5.038	PK
4		5875.000	62.075	56.944	-43.125	105.200	5.131	PK
5		5925.000	58.893	53.658	-9.307	68.200	5.236	PK
6	*	5966.460	61.125	55.788	-7.075	68.200	5.336	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5825Hz	

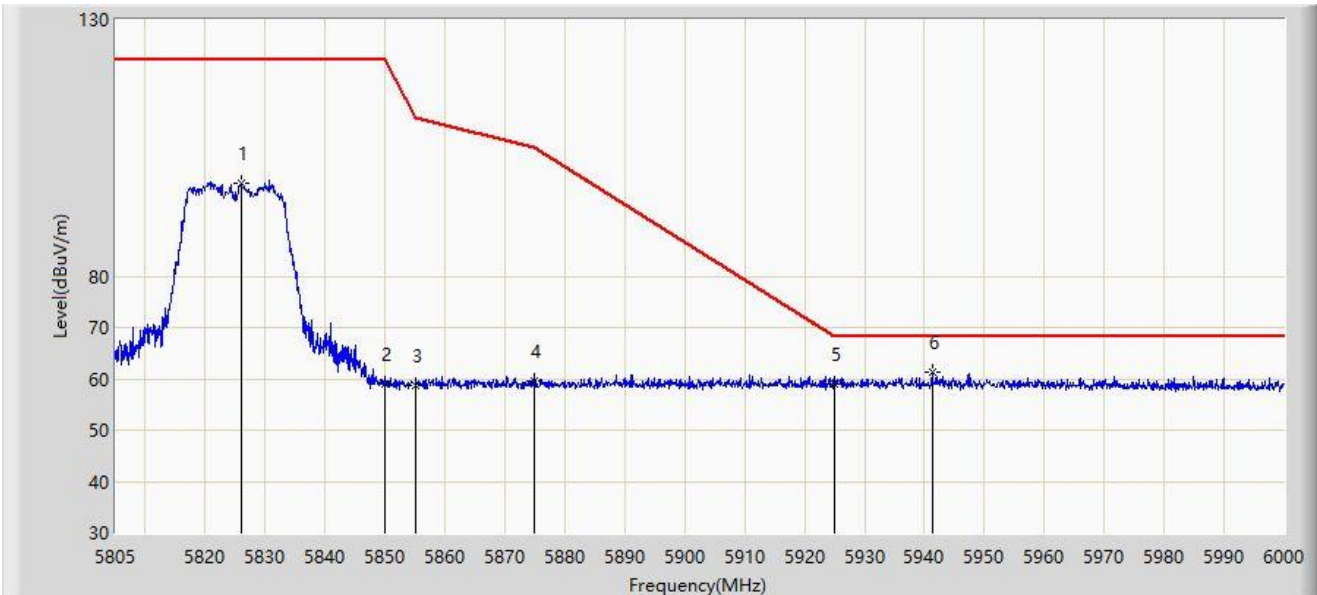


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5825.962	98.212	93.358	N/A	N/A	4.855	PK
2		5850.000	59.007	54.024	-63.193	122.200	4.984	PK
3		5855.000	58.829	53.791	-51.971	110.800	5.038	PK
4		5875.000	59.570	54.439	-45.630	105.200	5.131	PK
5		5925.000	59.054	53.819	-9.146	68.200	5.236	PK
6	*	5941.305	61.160	55.868	-7.040	68.200	5.291	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

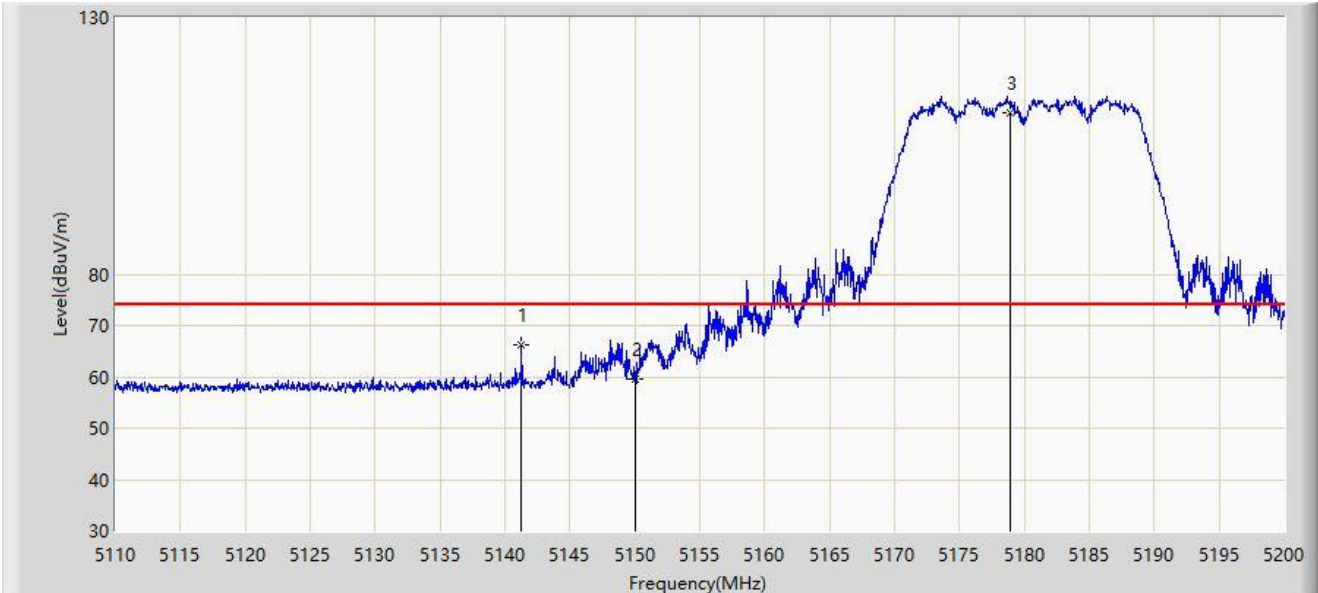


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5141.275	66.295	62.904	-7.705	74.000	3.391	PK
2		5150.000	59.504	56.022	-14.496	74.000	3.482	PK
3		5178.940	111.526	108.235	N/A	N/A	3.291	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

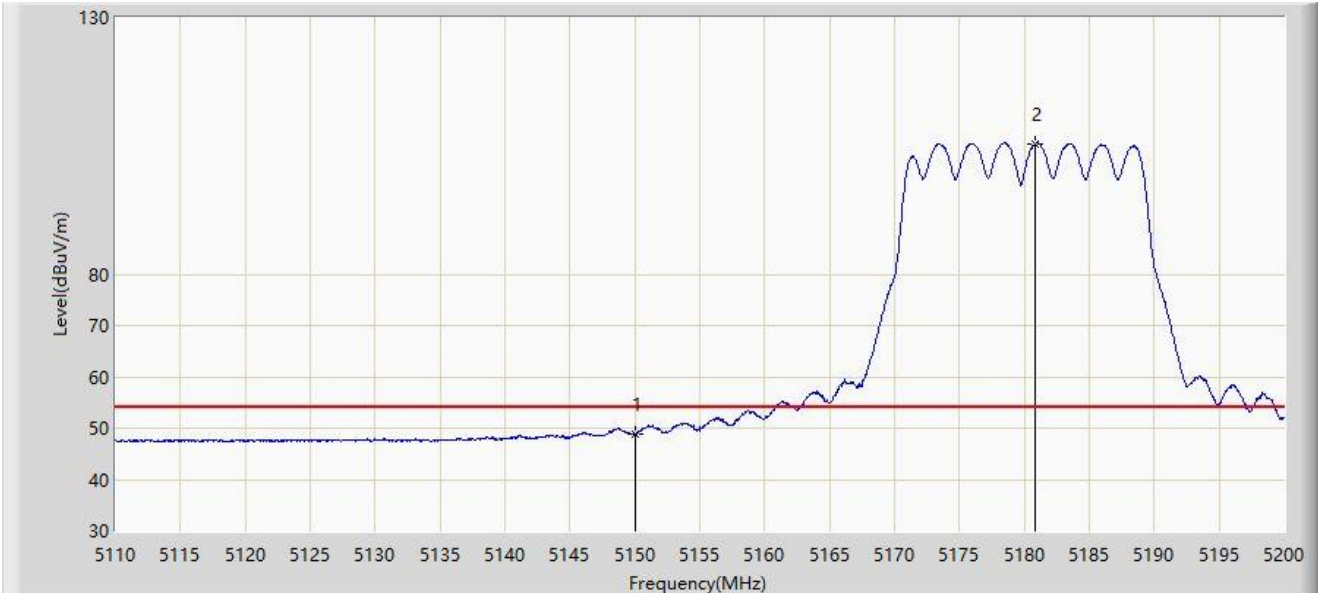


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	48.819	45.337	-5.181	54.000	3.482	AV
2		5180.830	105.403	102.150	N/A	N/A	3.253	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

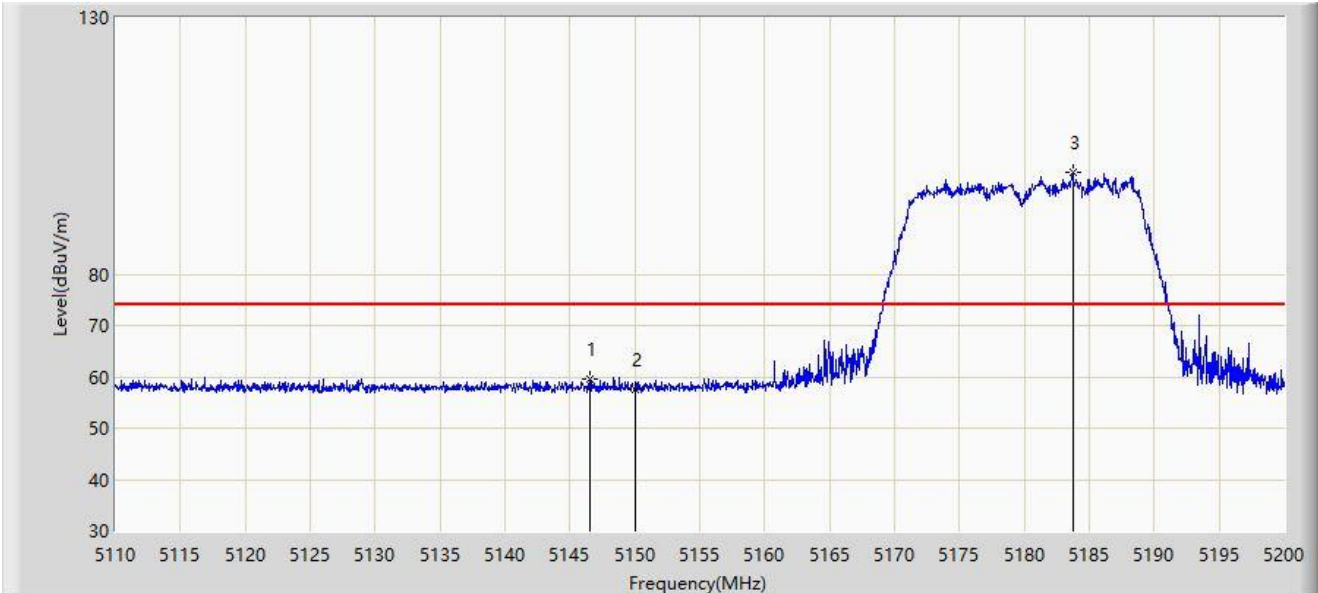


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.585	59.693	56.235	-14.307	74.000	3.457	PK
2		5150.000	57.670	54.188	-16.330	74.000	3.482	PK
3		5183.710	99.972	96.782	N/A	N/A	3.191	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

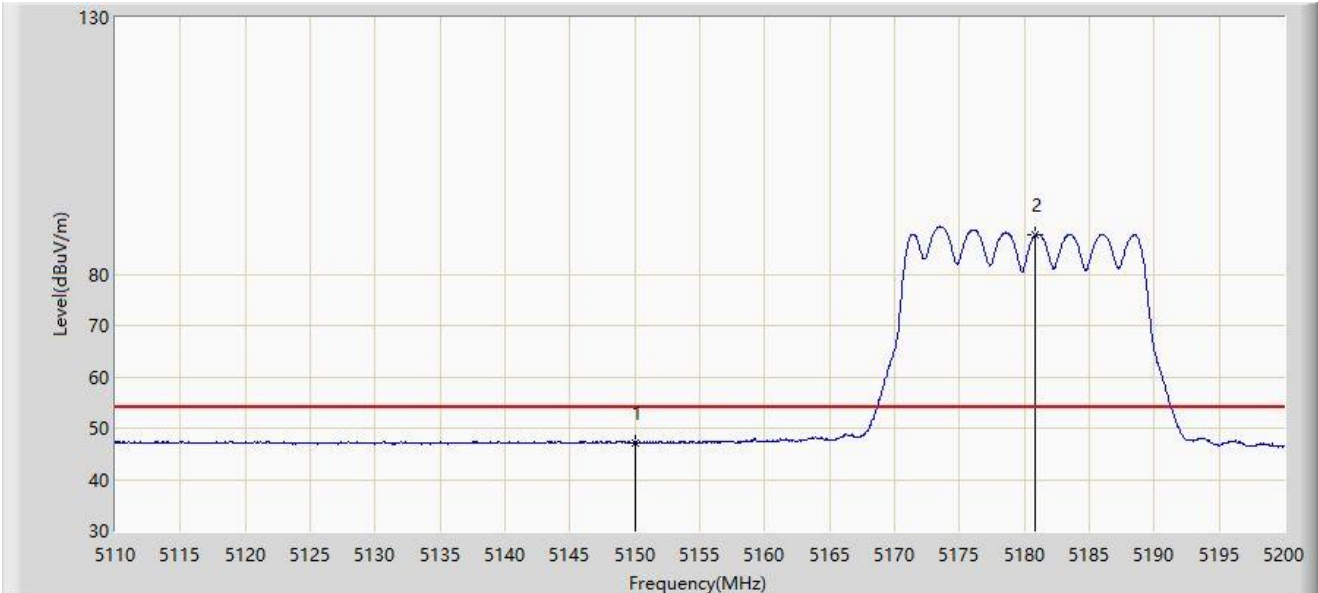


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5150.000	47.223	43.741	-6.777	54.000	3.482	AV
2		5180.875	87.609	84.357	N/A	N/A	3.253	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

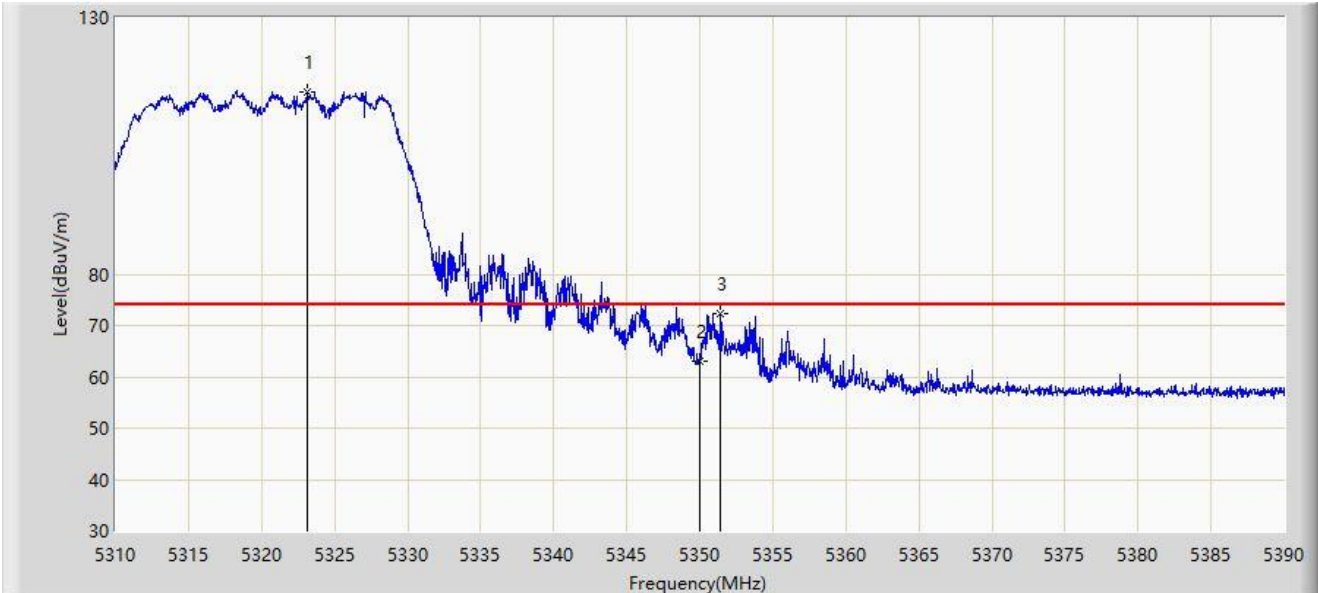


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5323.160	115.600	112.598	N/A	N/A	3.001	PK
2		5350.000	63.109	60.289	-10.891	74.000	2.820	PK
3	*	5351.400	72.402	69.606	-1.598	74.000	2.796	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

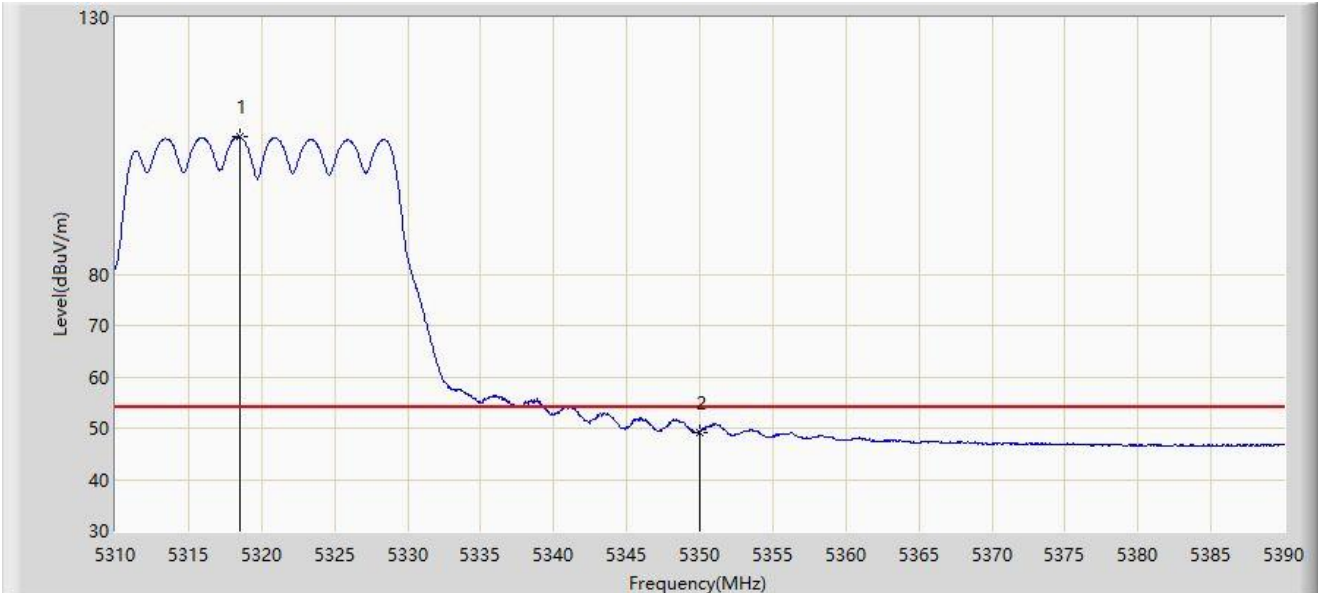


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5318.560	106.749	103.740	N/A	N/A	3.010	AV
2	*	5350.000	49.205	46.385	-4.795	54.000	2.820	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

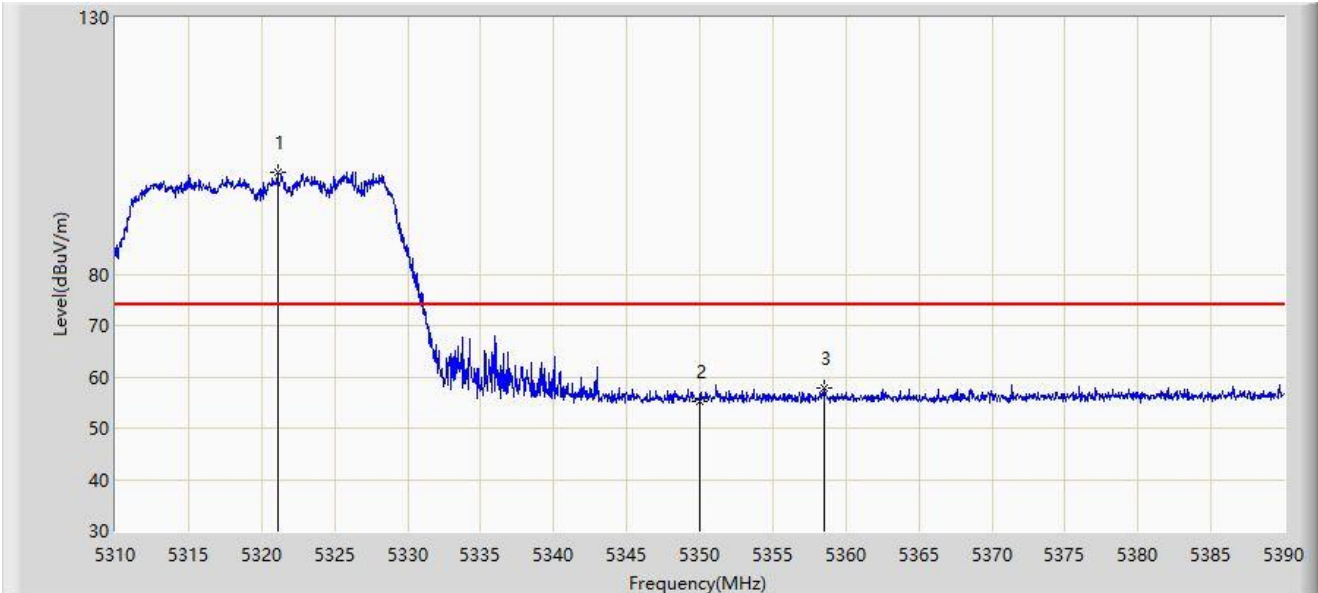


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5321.080	99.772	96.767	N/A	N/A	3.005	PK
2		5350.000	55.328	52.508	-18.672	74.000	2.820	PK
3	*	5358.480	57.857	55.042	-16.143	74.000	2.815	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

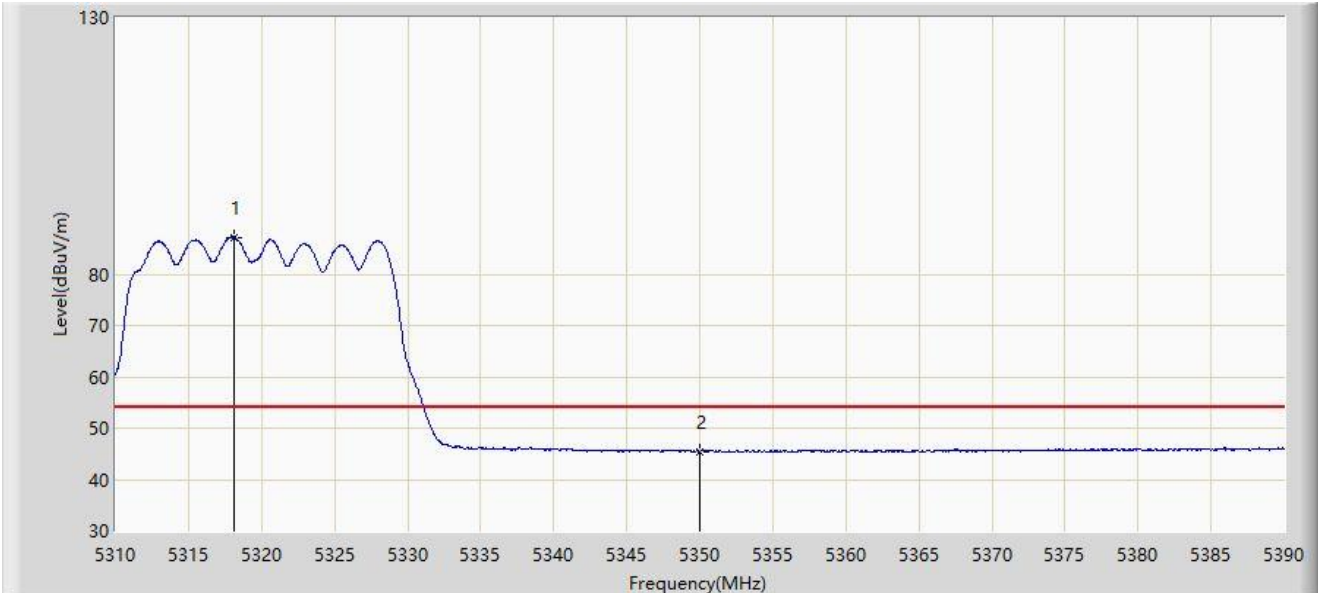


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5318.160	87.184	84.174	N/A	N/A	3.010	AV
2	*	5350.000	45.466	42.646	-8.534	54.000	2.820	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

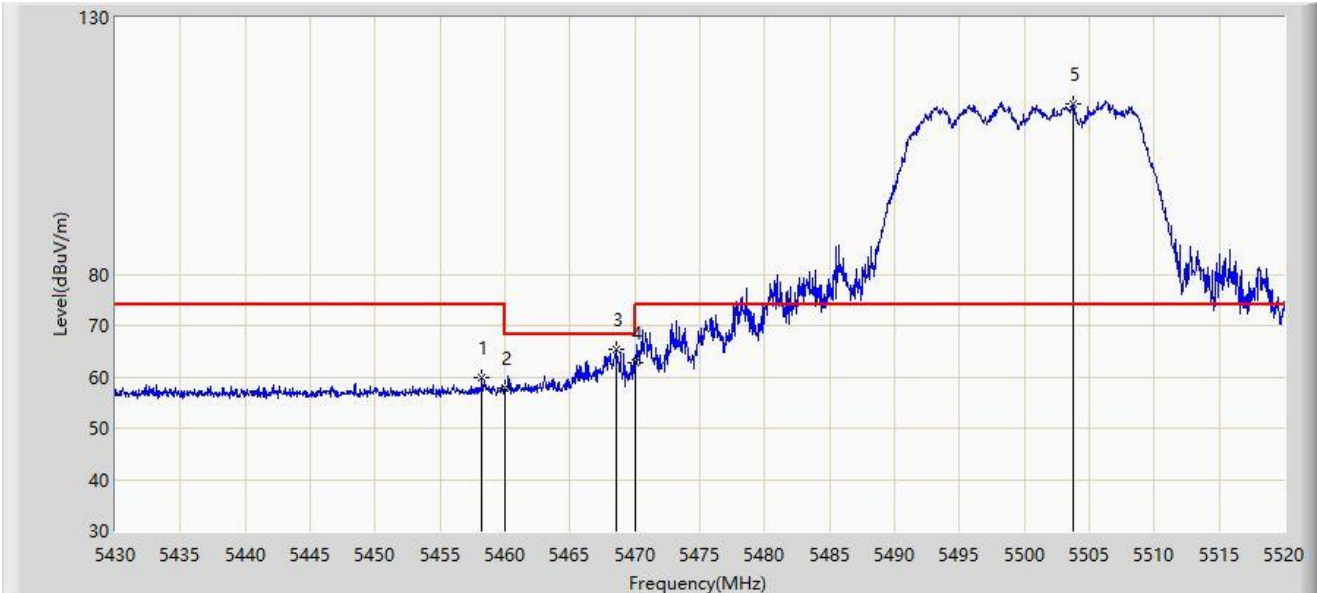


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5458.215	59.732	56.617	-14.268	74.000	3.115	PK
2		5460.000	57.858	54.709	-16.142	74.000	3.149	PK
3	*	5468.520	65.464	62.151	-2.736	68.200	3.313	PK
4		5470.000	62.790	59.448	-5.410	68.200	3.341	PK
5		5503.800	113.127	109.968	N/A	N/A	3.159	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

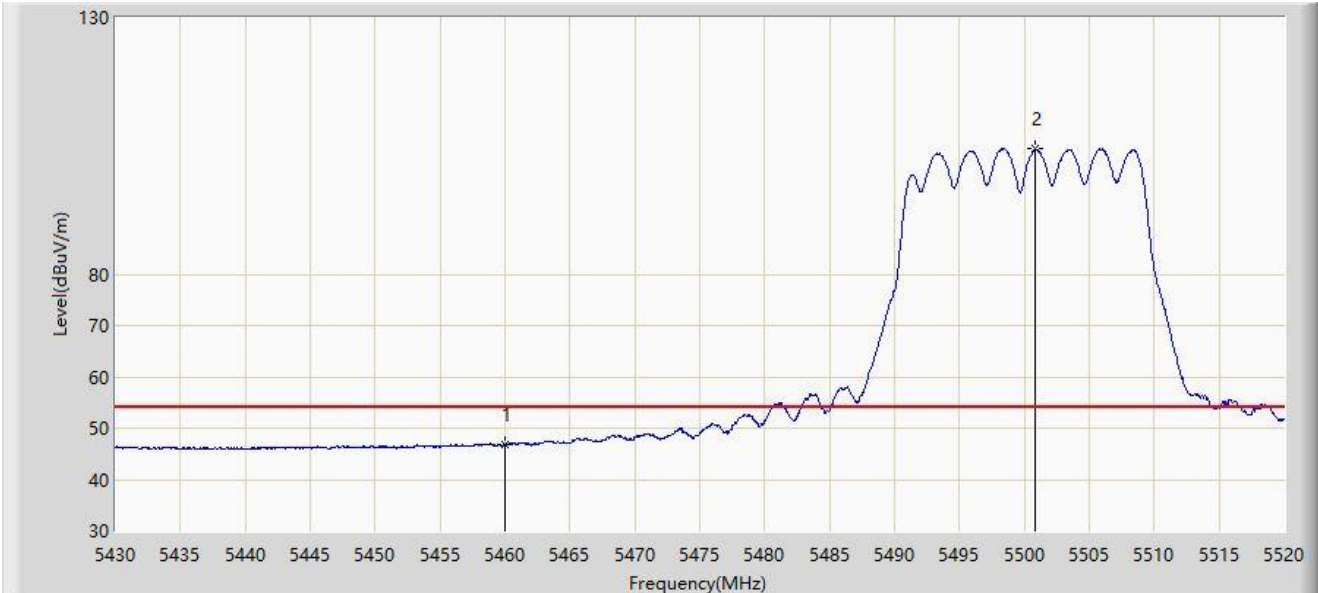


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	46.678	43.529	-7.322	54.000	3.149	AV
2		5500.875	104.392	101.213	N/A	N/A	3.179	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

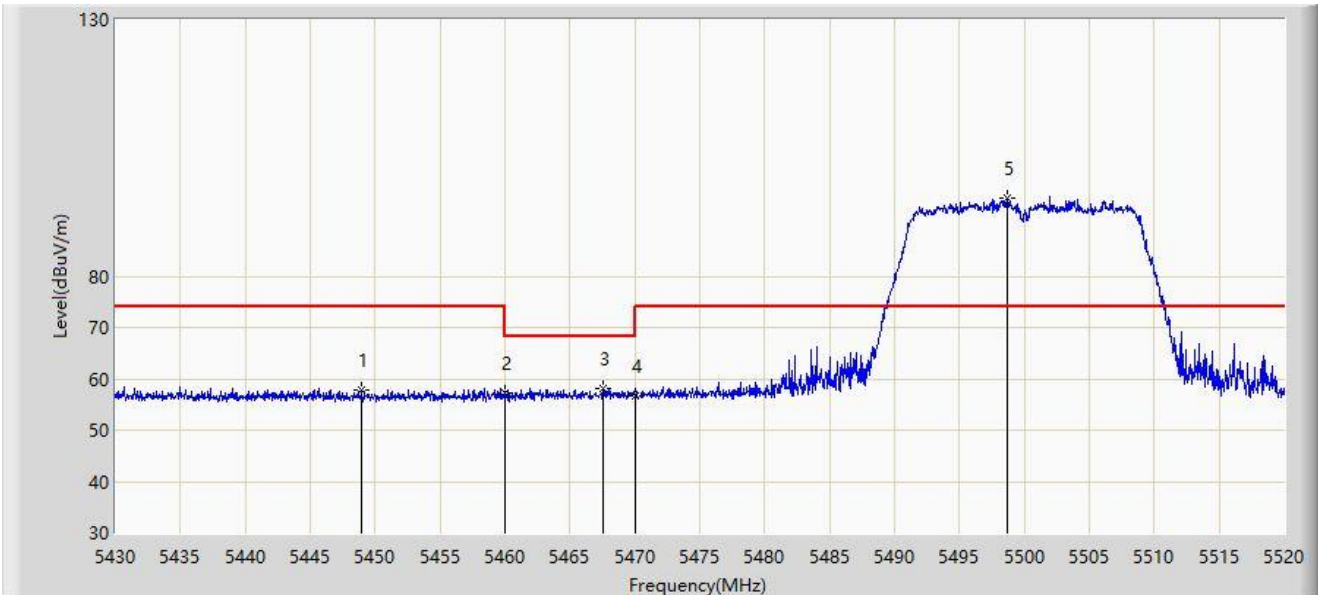


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5448.945	57.911	54.828	-16.089	74.000	3.083	PK
2		5460.000	57.264	54.115	-16.736	74.000	3.149	PK
3	*	5467.575	57.973	54.678	-10.227	68.200	3.294	PK
4		5470.000	56.595	53.253	-11.605	68.200	3.341	PK
5		5498.670	95.333	92.138	N/A	N/A	3.196	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

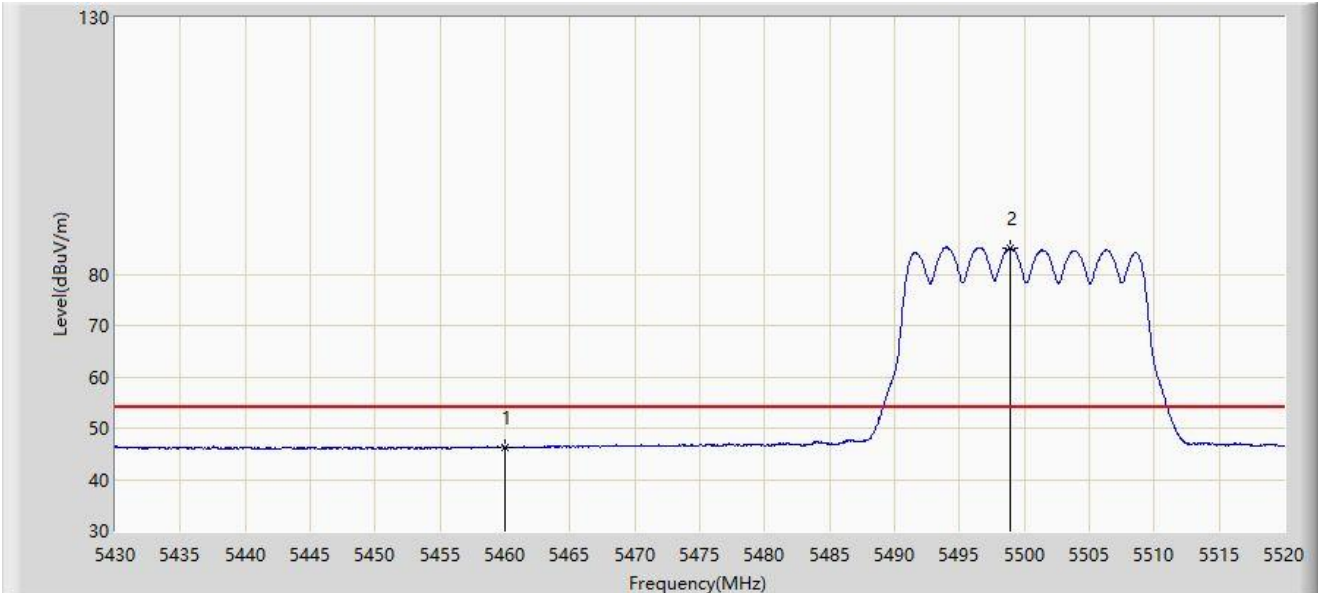


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5460.000	46.322	43.173	-7.678	54.000	3.149	AV
2		5498.895	85.136	81.943	N/A	N/A	3.194	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

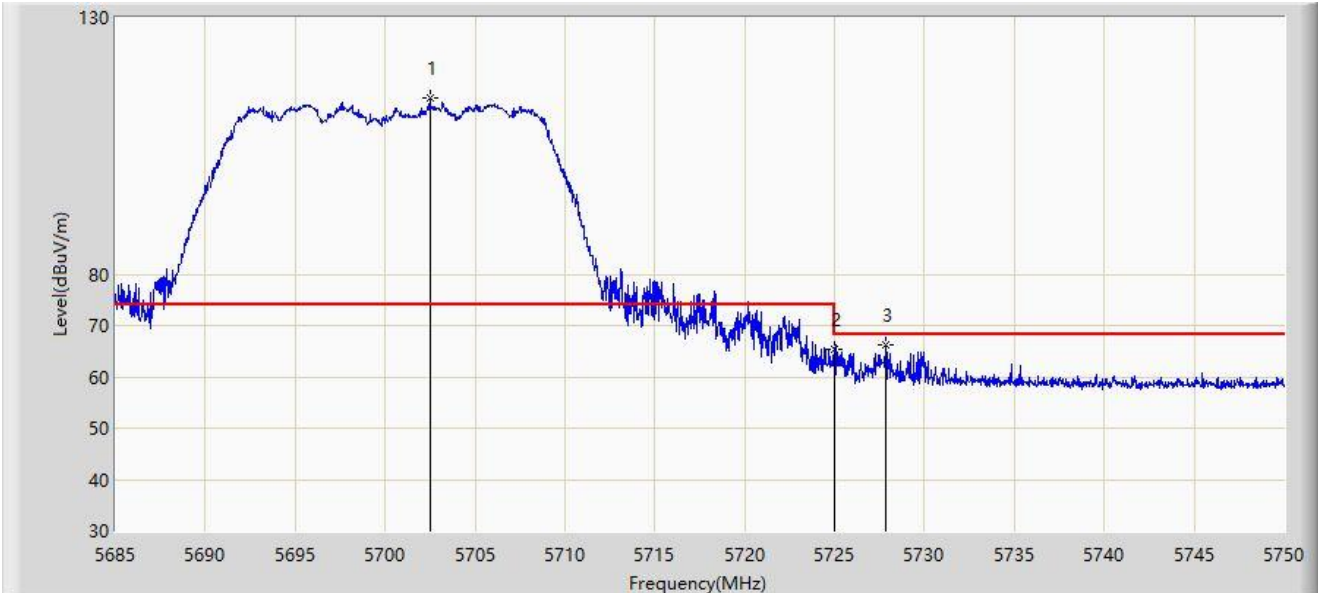


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5702.518	114.320	109.845	N/A	N/A	4.474	PK
2		5725.000	65.491	60.788	-2.709	68.200	4.703	PK
3	*	5727.835	66.106	61.423	-2.094	68.200	4.683	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

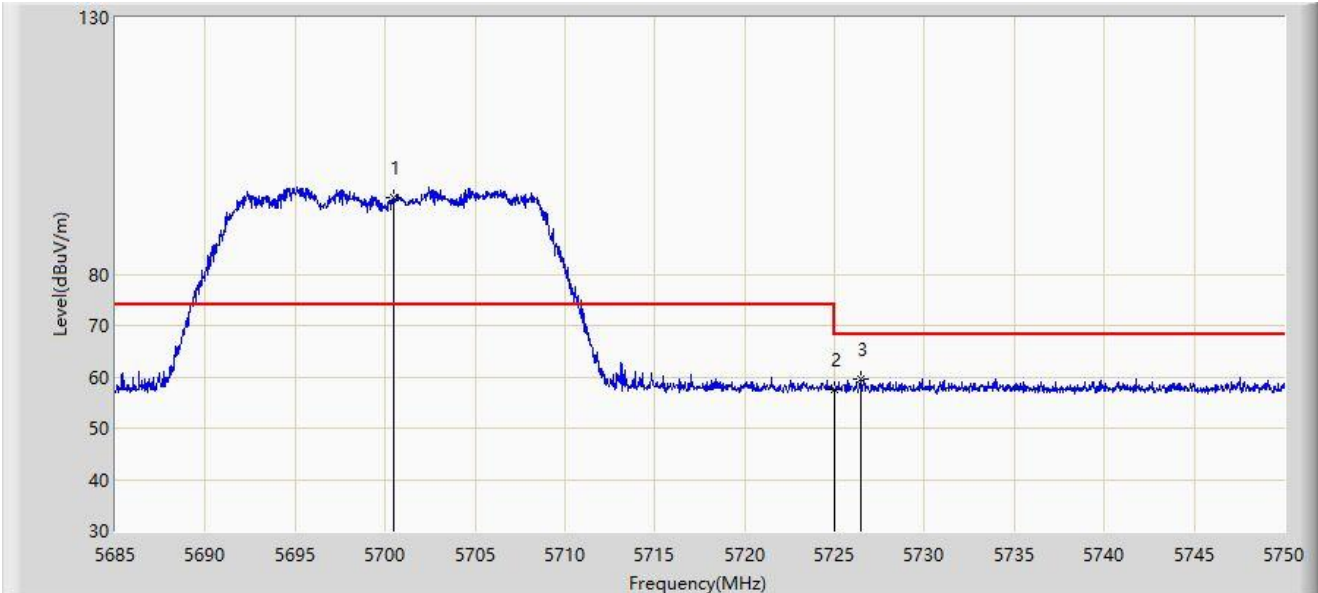


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5700.502	94.831	90.387	N/A	N/A	4.444	PK
2		5725.000	57.577	52.874	-10.623	68.200	4.703	PK
3	*	5726.437	59.697	54.990	-8.503	68.200	4.707	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

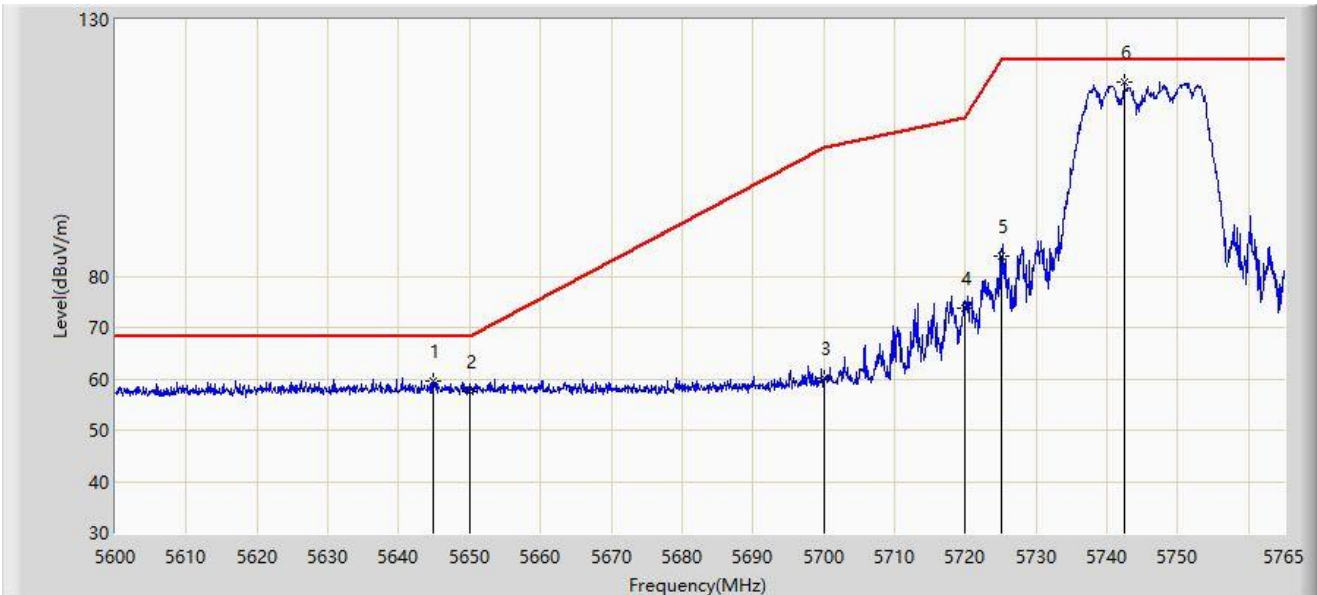


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5644.880	59.666	55.518	-8.534	68.200	4.148	PK
2		5650.000	57.588	53.465	-10.612	68.200	4.122	PK
3		5700.000	60.133	55.696	-45.067	105.200	4.437	PK
4		5720.000	73.782	69.118	-37.018	110.800	4.663	PK
5		5725.000	84.041	79.338	-38.159	122.200	4.703	PK
6		5742.478	117.810	113.387	N/A	N/A	4.424	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

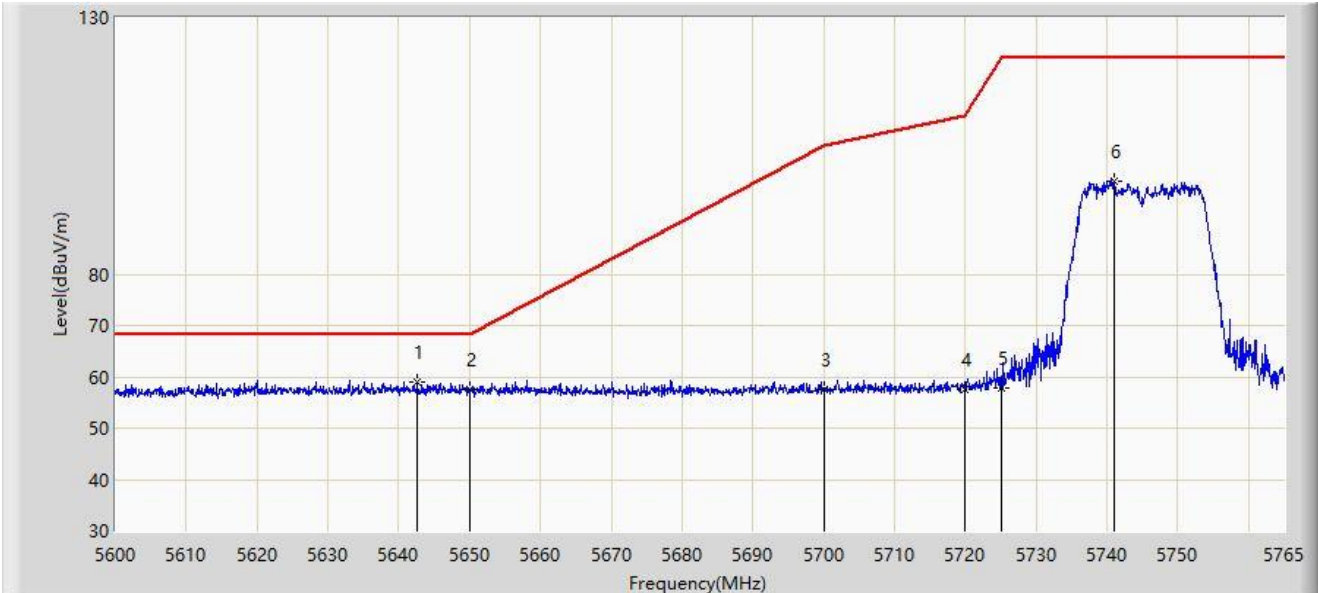


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5642.652	58.920	54.761	-9.280	68.200	4.159	PK
2		5650.000	57.549	53.426	-10.651	68.200	4.122	PK
3		5700.000	57.511	53.074	-47.689	105.200	4.437	PK
4		5720.000	57.631	52.967	-53.169	110.800	4.663	PK
5		5725.000	57.890	53.187	-64.310	122.200	4.703	PK
6		5740.993	98.211	93.761	N/A	N/A	4.450	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5825Hz	

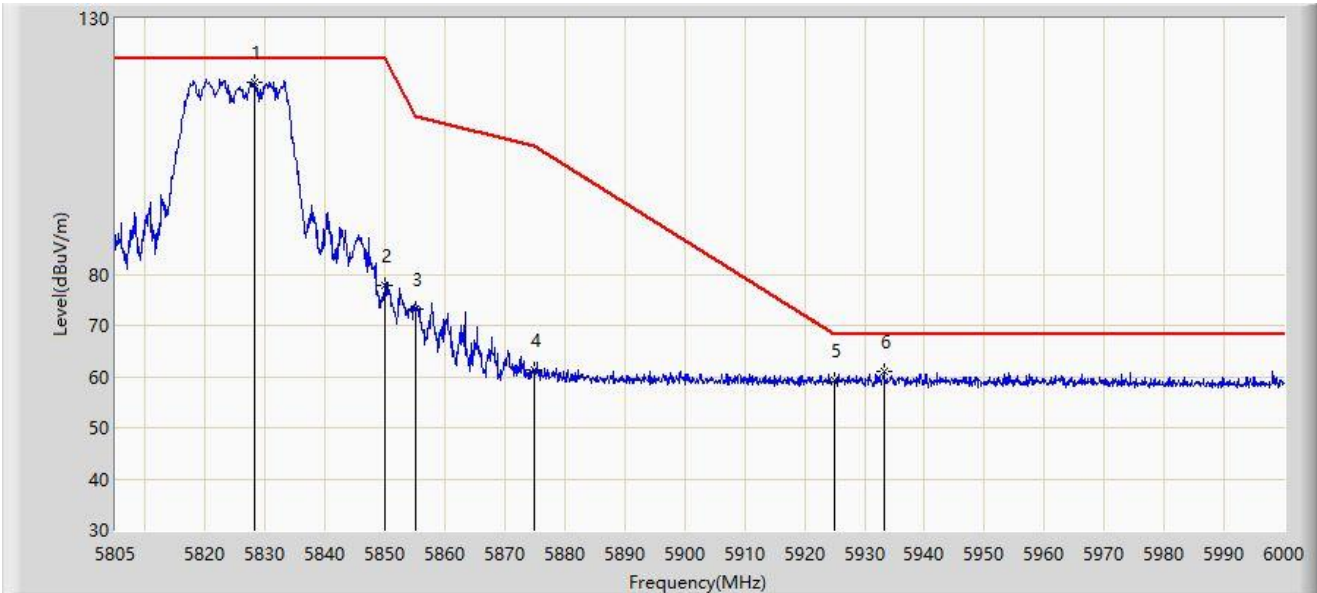


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5828.107	117.550	112.718	N/A	N/A	4.832	PK
2		5850.000	77.783	72.800	-44.417	122.200	4.984	PK
3		5855.000	73.245	68.207	-37.555	110.800	5.038	PK
4		5875.000	61.277	56.146	-43.923	105.200	5.131	PK
5		5925.000	59.198	53.963	-9.002	68.200	5.236	PK
6	*	5933.212	61.089	55.817	-7.111	68.200	5.273	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5825Hz	

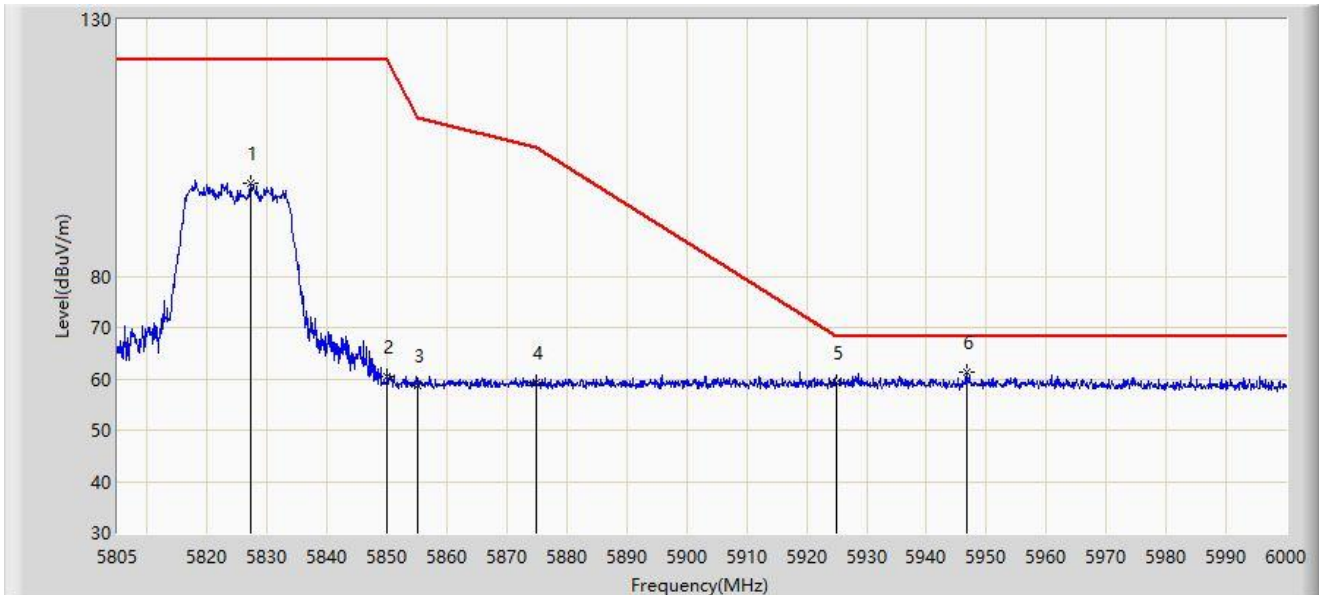


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5827.132	98.007	93.166	N/A	N/A	4.841	PK
2		5850.000	60.363	55.380	-61.837	122.200	4.984	PK
3		5855.000	58.722	53.684	-52.078	110.800	5.038	PK
4		5875.000	59.362	54.231	-45.838	105.200	5.131	PK
5		5925.000	59.275	54.040	-8.925	68.200	5.236	PK
6	*	5946.765	61.355	56.012	-6.845	68.200	5.343	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

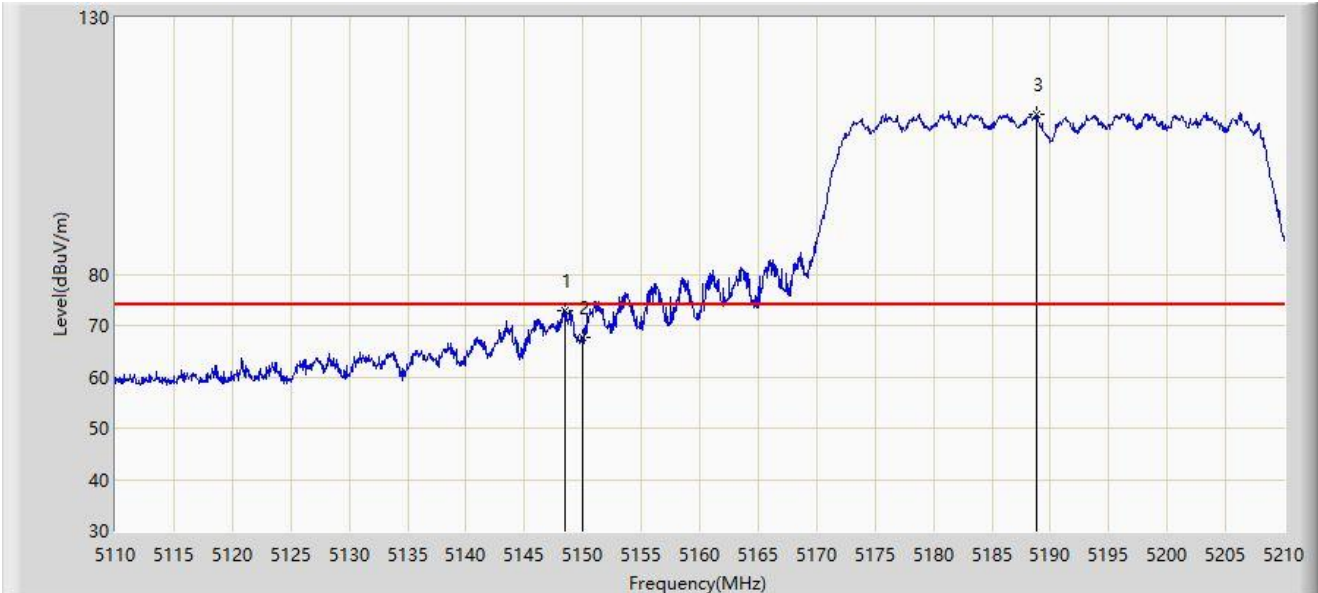


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.500	72.878	69.401	-1.122	74.000	3.477	PK
2		5150.000	67.751	64.269	-6.249	74.000	3.482	PK
3		5188.800	111.087	108.012	N/A	N/A	3.075	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

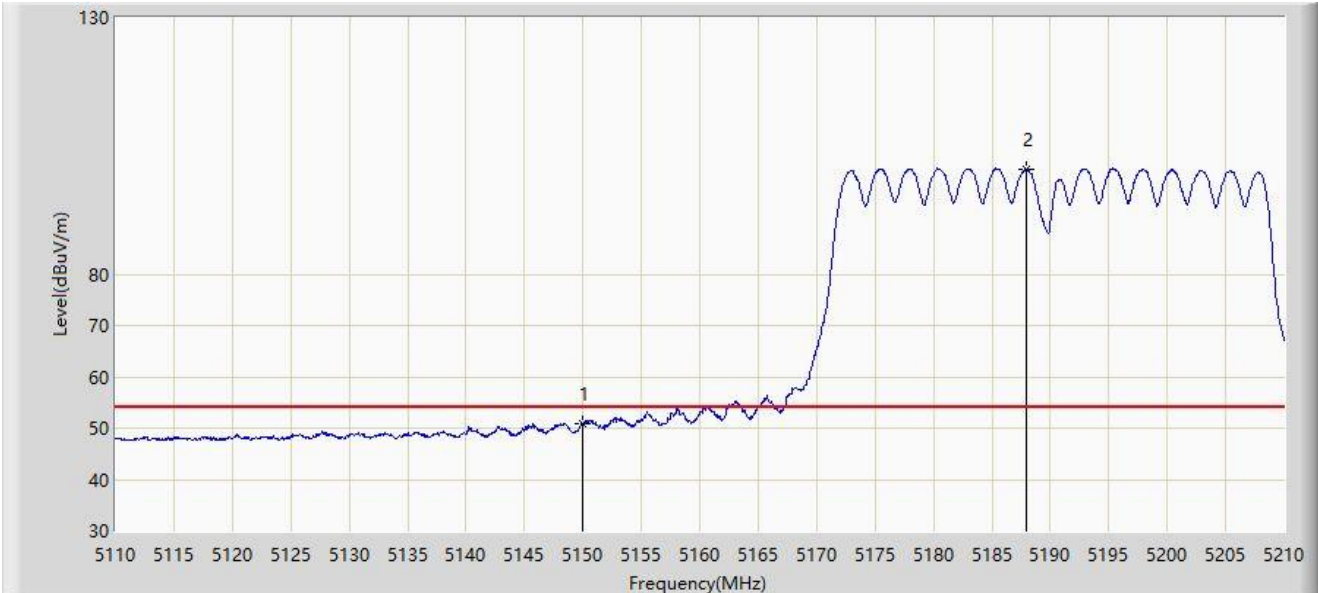


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5150.000	50.815	47.333	-3.185	54.000	3.482	AV
2		5188.000	100.493	97.401	N/A	N/A	3.093	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

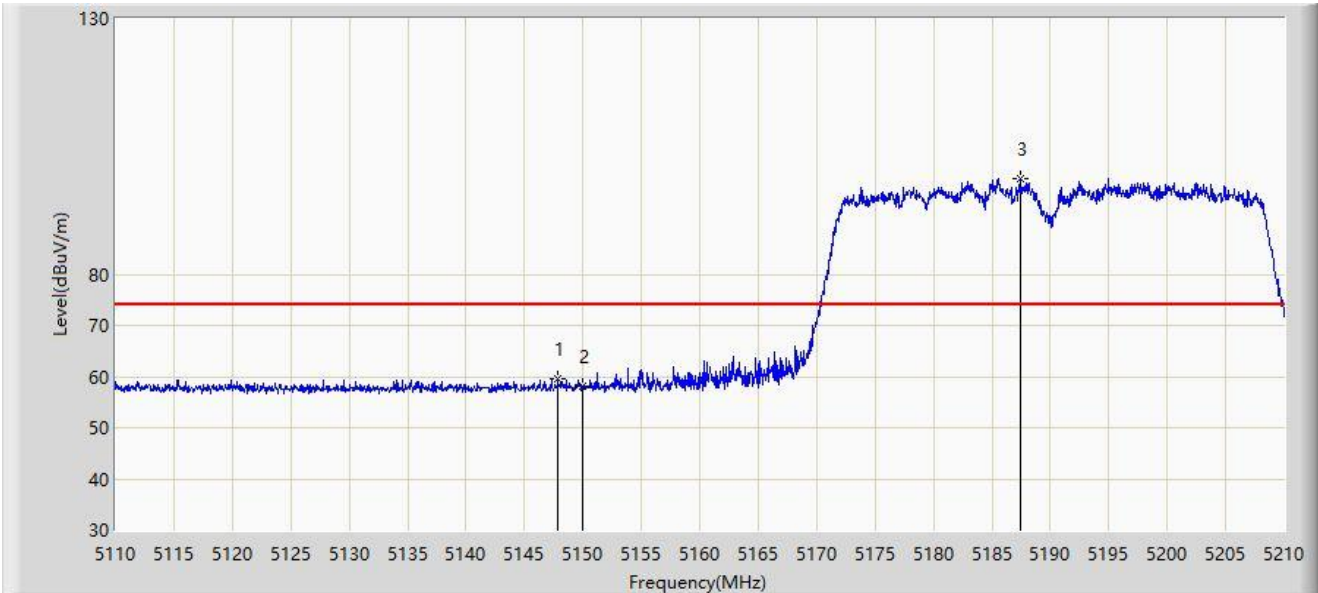


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.850	59.551	56.077	-14.449	74.000	3.473	PK
2		5150.000	57.982	54.500	-16.018	74.000	3.482	PK
3		5187.500	98.656	95.553	N/A	N/A	3.103	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

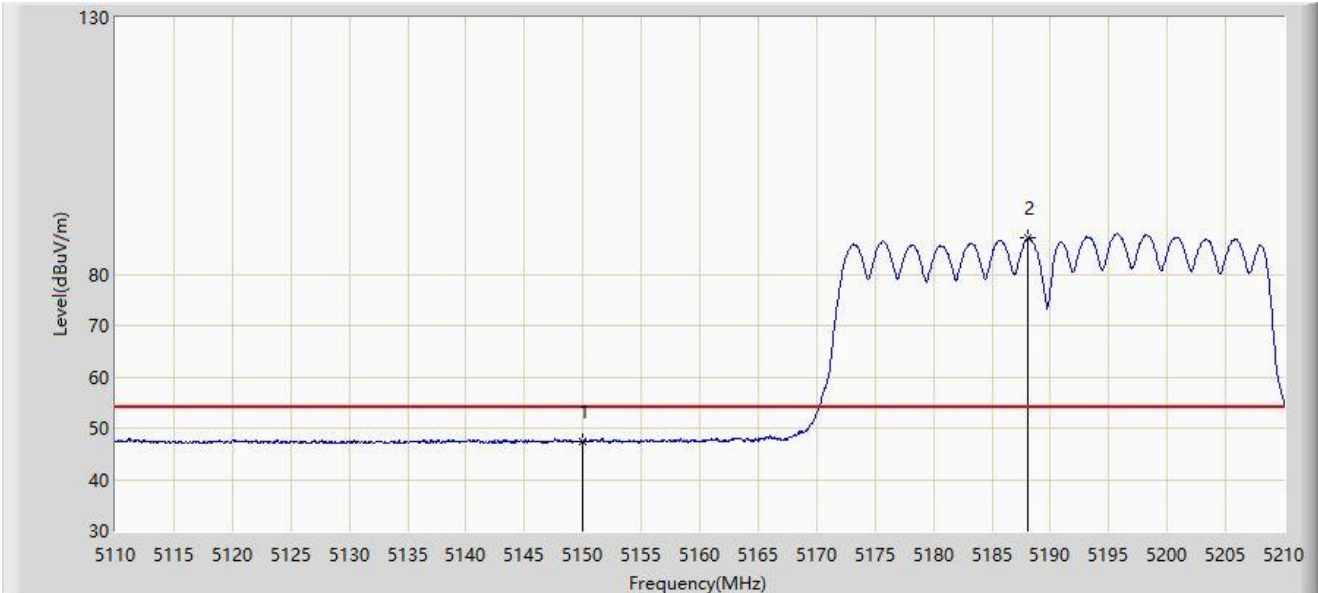


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5150.000	47.373	43.891	-6.627	54.000	3.482	AV
2		5188.100	87.036	83.946	N/A	N/A	3.090	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

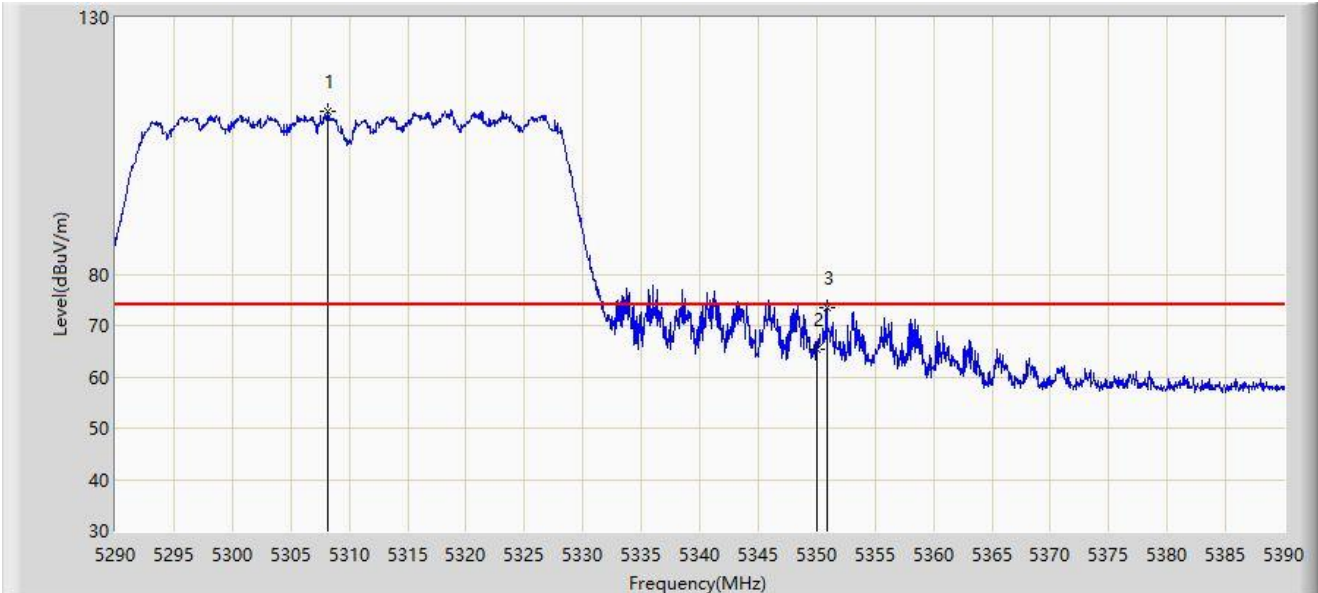


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5308.200	111.697	108.849	N/A	N/A	2.848	PK
2		5350.000	65.453	62.633	-8.547	74.000	2.820	PK
3	*	5350.850	73.406	70.600	-0.594	74.000	2.805	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

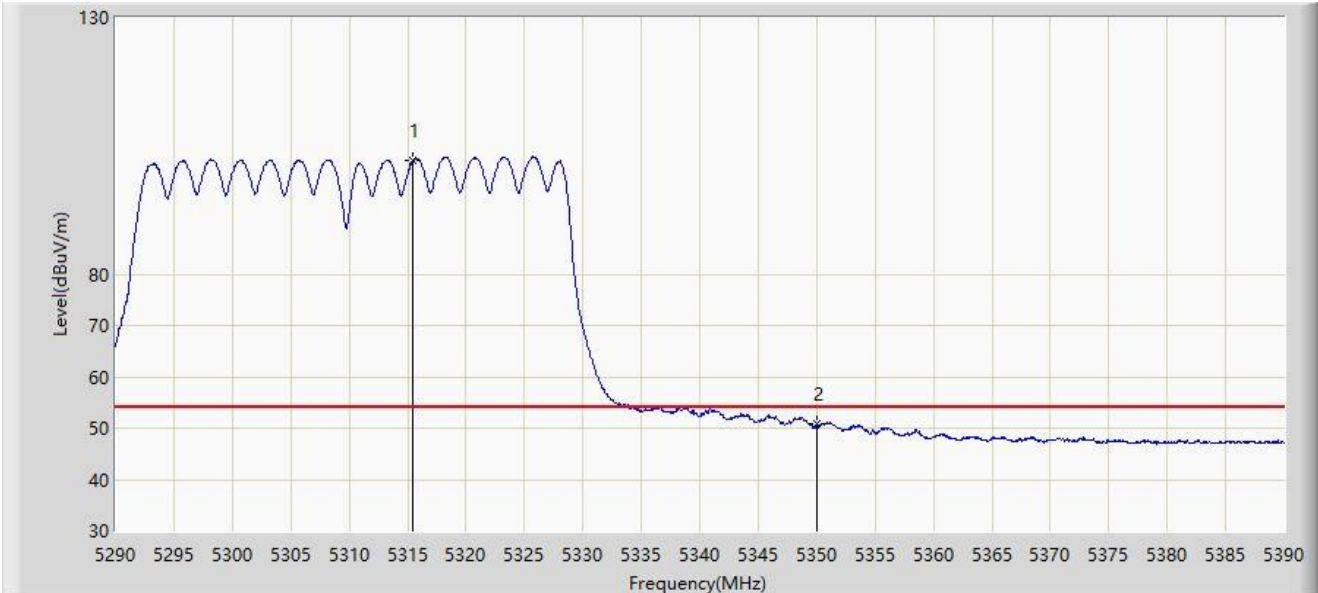


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5315.450	102.246	99.281	N/A	N/A	2.965	AV
2	*	5350.000	50.753	47.933	-3.247	54.000	2.820	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

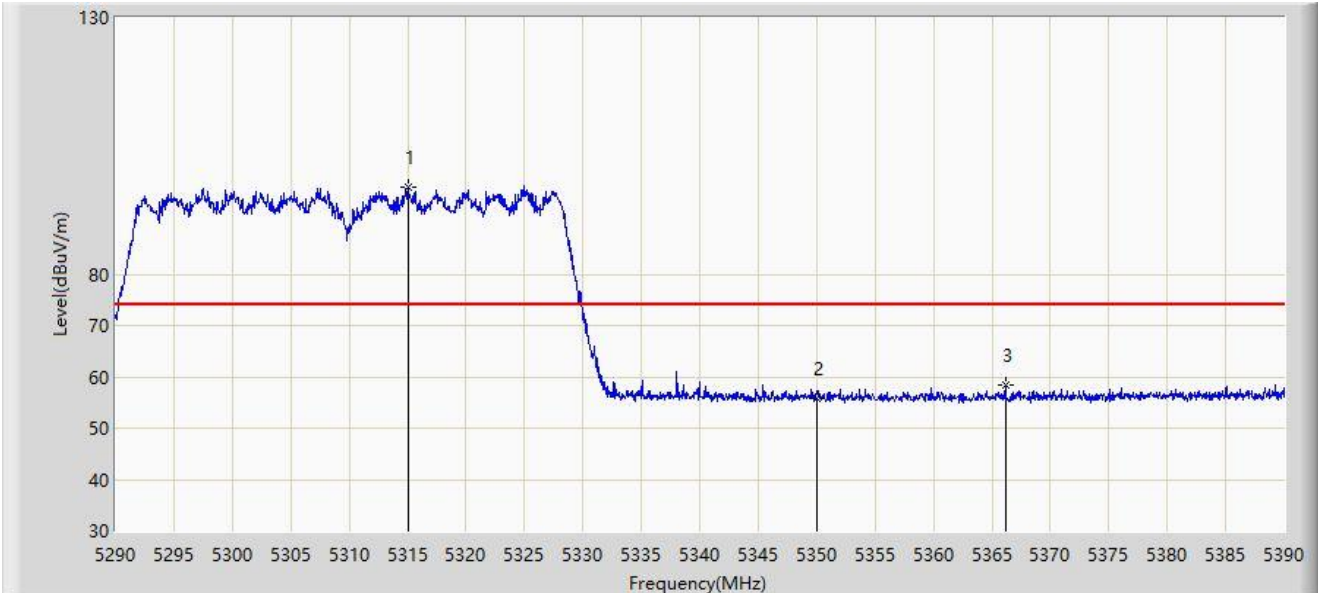


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5315.000	97.076	94.118	N/A	N/A	2.958	PK
2		5350.000	55.914	53.094	-18.086	74.000	2.820	PK
3	*	5366.150	58.422	55.573	-15.578	74.000	2.850	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

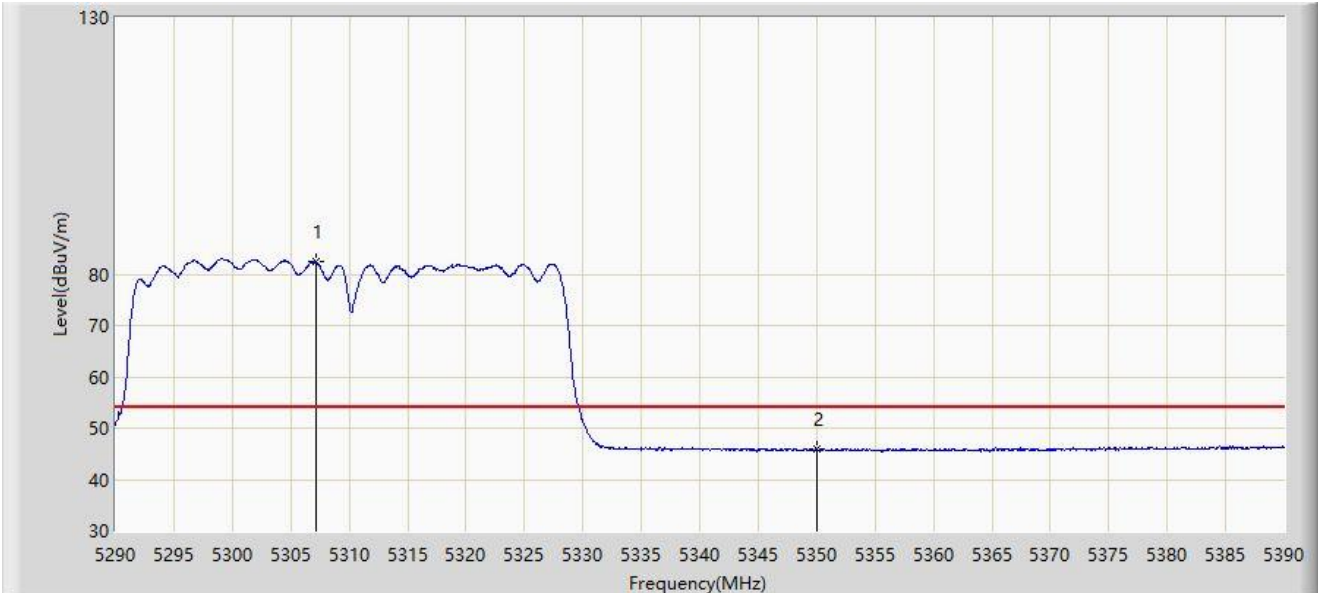


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5307.150	82.337	79.505	N/A	N/A	2.832	AV
2	*	5350.000	45.935	43.115	-8.065	54.000	2.820	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

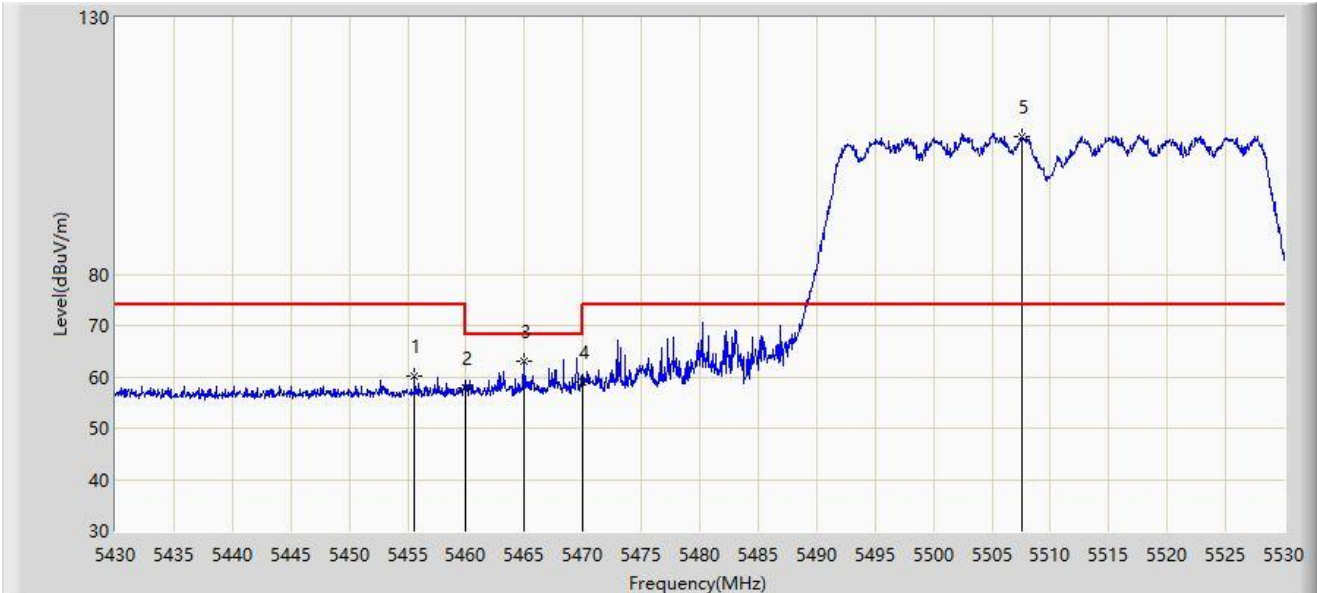


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5455.600	60.188	57.119	-13.812	74.000	3.069	PK
2		5460.000	57.811	54.662	-16.189	74.000	3.149	PK
3	*	5465.000	63.011	59.765	-5.189	68.200	3.246	PK
4		5470.000	59.027	55.685	-9.173	68.200	3.341	PK
5		5507.600	106.741	103.617	N/A	N/A	3.123	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

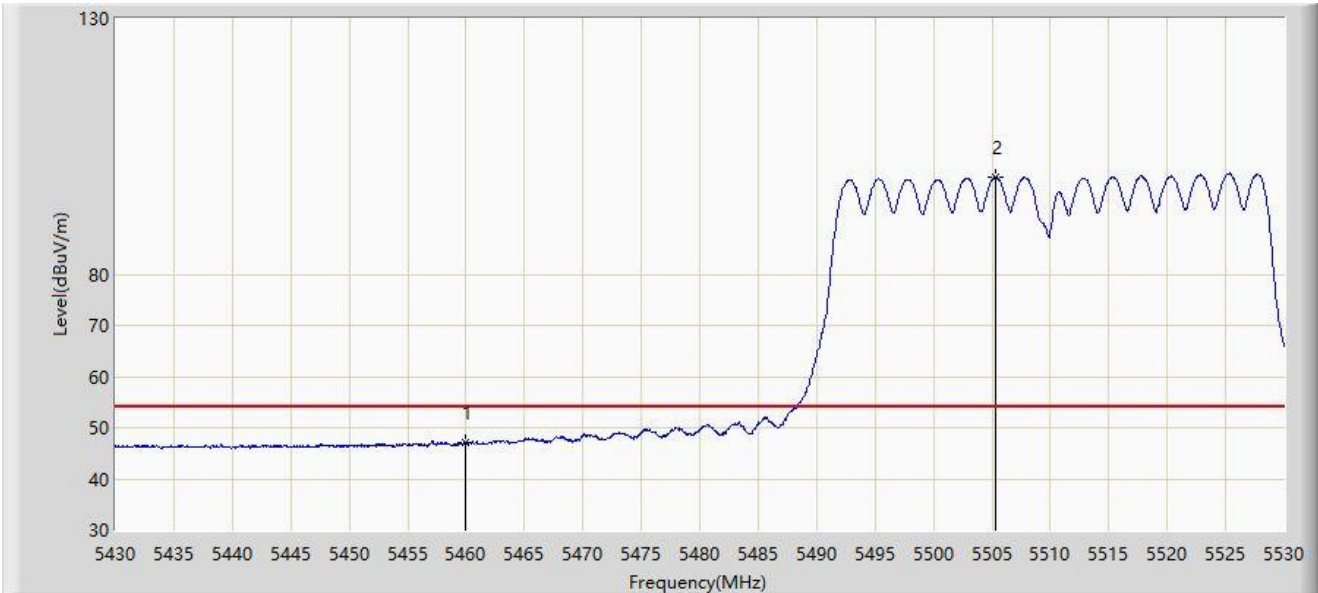


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	47.216	44.067	-6.784	54.000	3.149	AV
2		5505.350	99.031	95.884	N/A	N/A	3.147	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

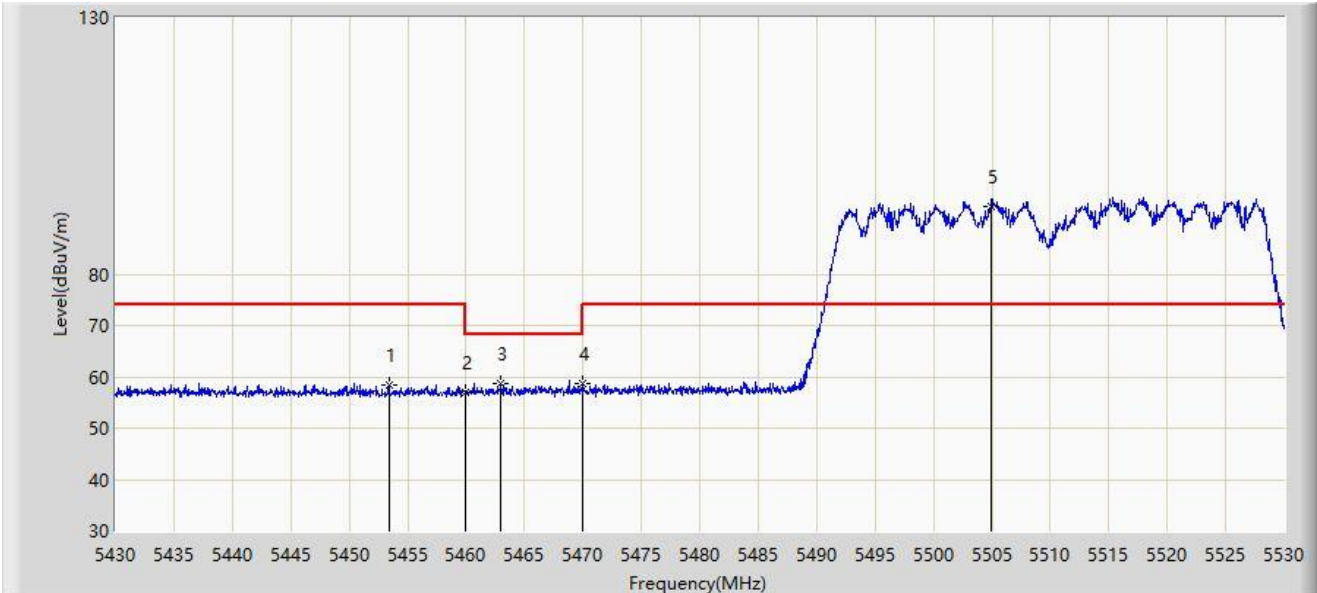


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5453.400	58.439	55.390	-15.561	74.000	3.049	PK
2		5460.000	57.089	53.940	-16.911	74.000	3.149	PK
3	*	5463.000	58.729	55.522	-9.471	68.200	3.207	PK
4		5470.000	58.648	55.306	-9.552	68.200	3.341	PK
5		5504.900	93.163	90.012	N/A	N/A	3.152	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

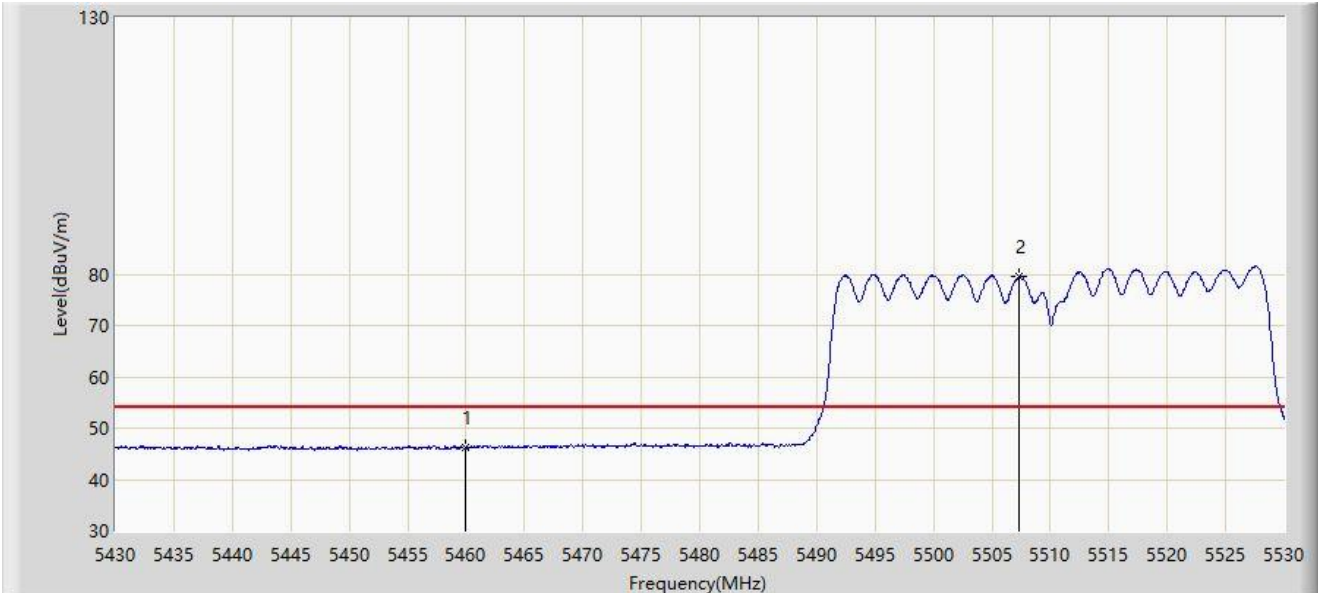


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	46.205	43.056	-7.795	54.000	3.149	AV
2		5507.300	79.598	76.471	N/A	N/A	3.126	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

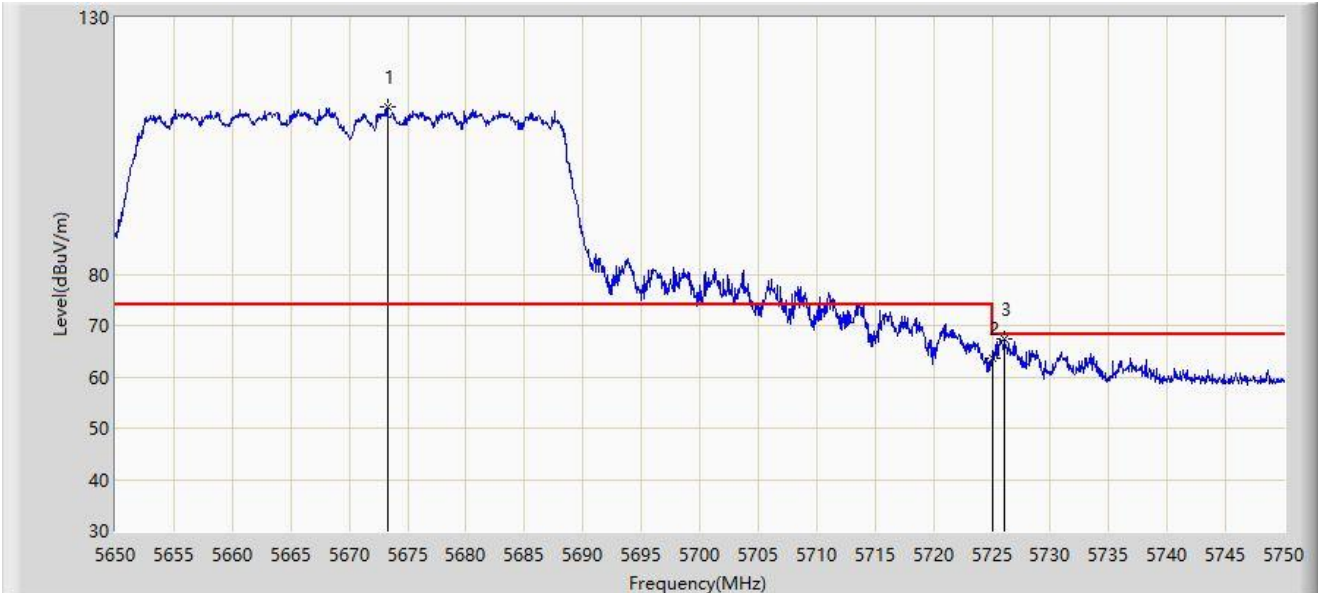


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5673.300	112.597	108.582	N/A	N/A	4.014	PK
2		5725.000	63.606	58.903	-4.594	68.200	4.703	PK
3	*	5726.050	67.432	62.721	-0.768	68.200	4.710	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

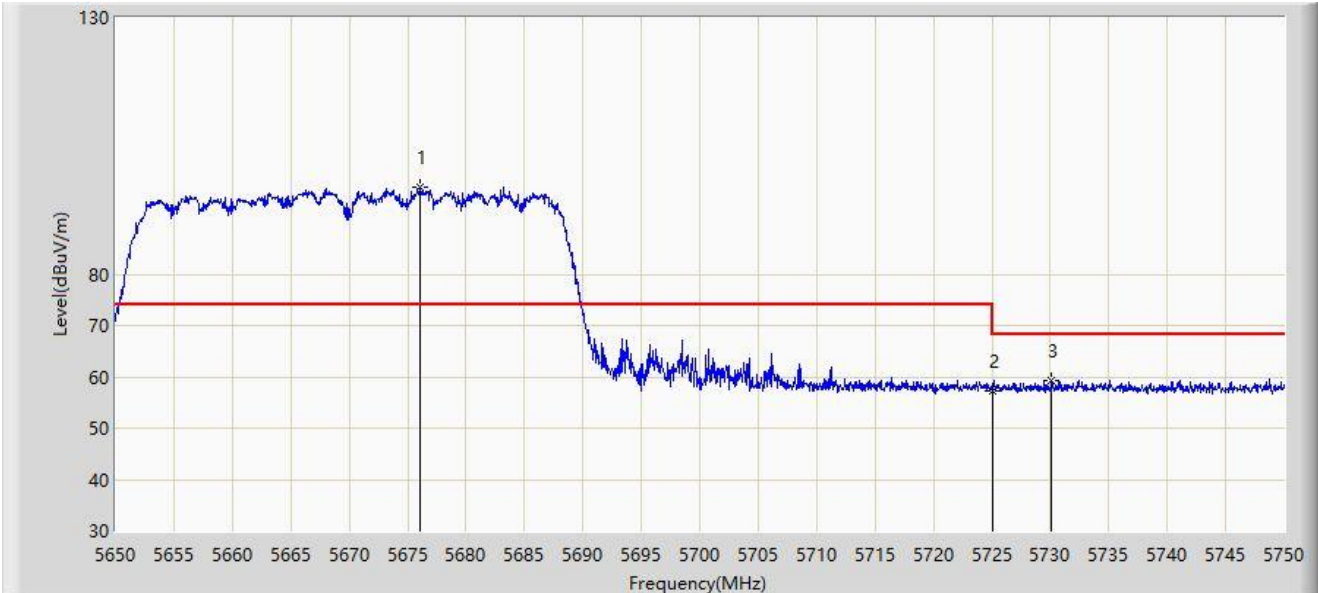


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5676.100	96.934	92.901	N/A	N/A	4.033	PK
2		5725.000	57.207	52.504	-10.993	68.200	4.703	PK
3	*	5730.100	59.332	54.690	-8.868	68.200	4.642	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

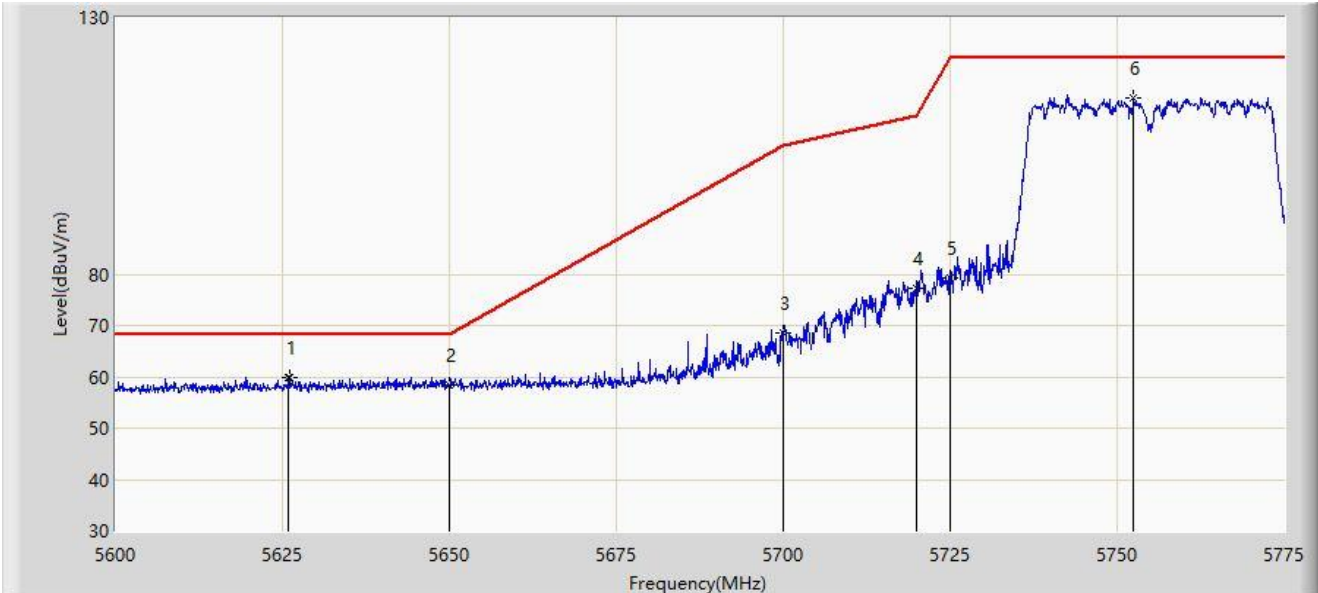


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5625.987	59.888	55.908	-8.312	68.200	3.979	PK
2		5650.000	58.327	54.204	-9.873	68.200	4.122	PK
3		5700.000	68.632	64.195	-36.568	105.200	4.437	PK
4		5720.000	77.327	72.663	-33.473	110.800	4.663	PK
5		5725.000	79.293	74.590	-42.907	122.200	4.703	PK
6		5752.513	114.342	109.832	N/A	N/A	4.510	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

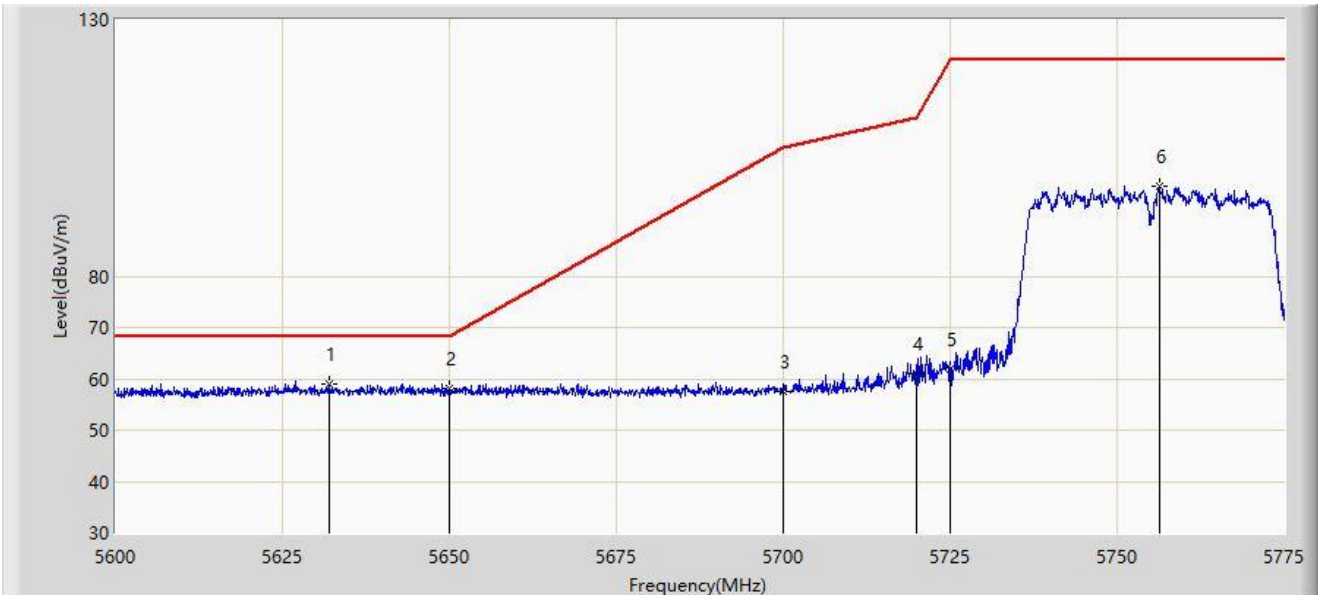


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5631.937	58.861	54.809	-9.339	68.200	4.052	PK
2		5650.000	58.012	53.889	-10.188	68.200	4.122	PK
3		5700.000	57.497	53.060	-47.703	105.200	4.437	PK
4		5720.000	60.964	56.300	-49.836	110.800	4.663	PK
5		5725.000	61.812	57.109	-60.388	122.200	4.703	PK
6		5756.275	97.511	92.956	N/A	N/A	4.556	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

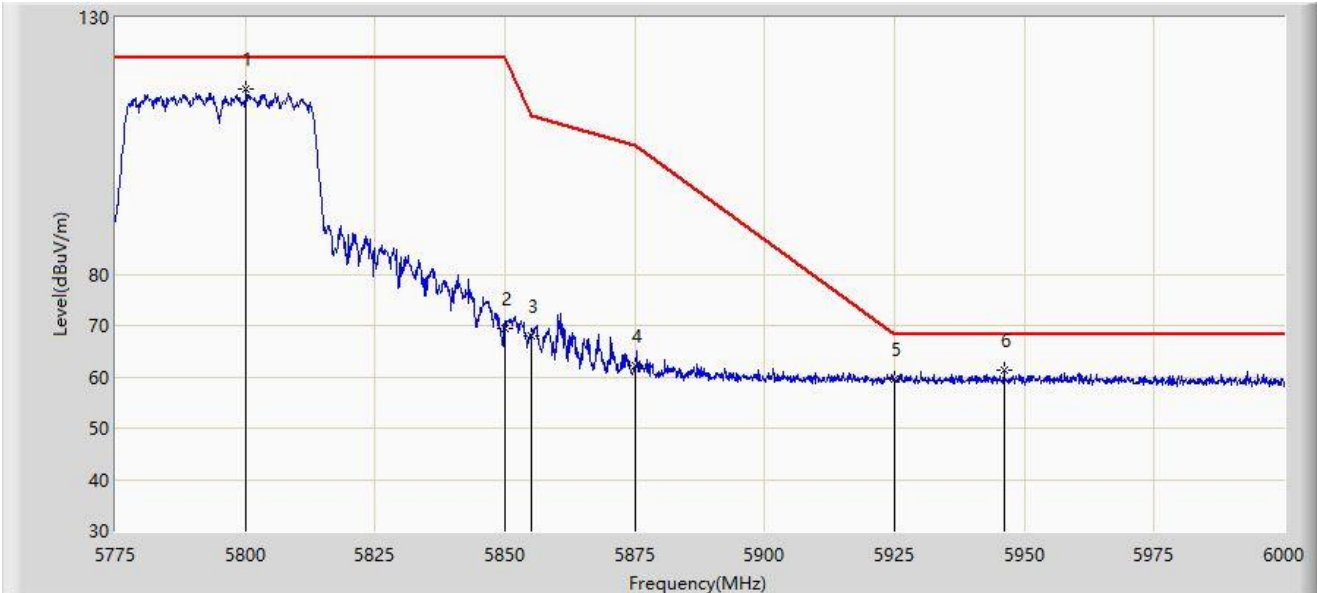


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5800.200	116.127	111.059	N/A	N/A	5.067	PK
2		5850.000	69.441	64.458	-52.759	122.200	4.984	PK
3		5855.000	67.909	62.871	-42.891	110.800	5.038	PK
4		5875.000	62.071	56.940	-43.129	105.200	5.131	PK
5		5925.000	59.462	54.227	-8.738	68.200	5.236	PK
6	*	5946.112	61.197	55.861	-7.003	68.200	5.336	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

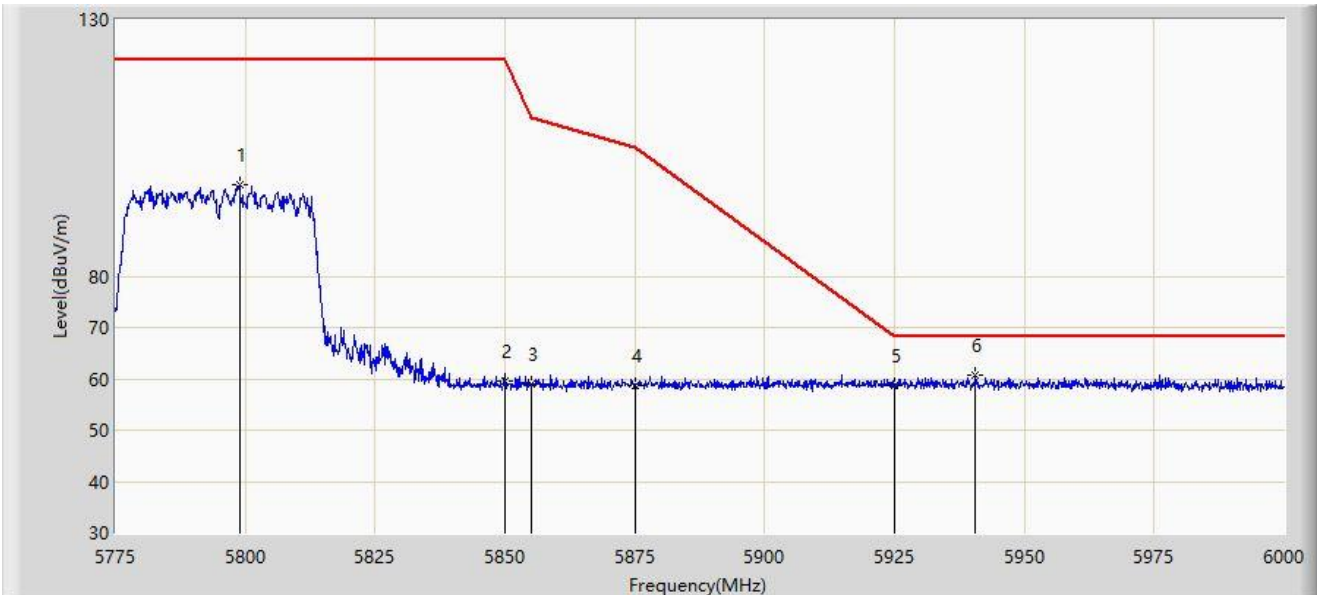


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5798.850	97.716	92.644	N/A	N/A	5.073	PK
2		5850.000	59.443	54.460	-62.757	122.200	4.984	PK
3		5855.000	59.013	53.975	-51.787	110.800	5.038	PK
4		5875.000	58.631	53.500	-46.569	105.200	5.131	PK
5		5925.000	58.782	53.547	-9.418	68.200	5.236	PK
6	*	5940.600	60.744	55.454	-7.456	68.200	5.290	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

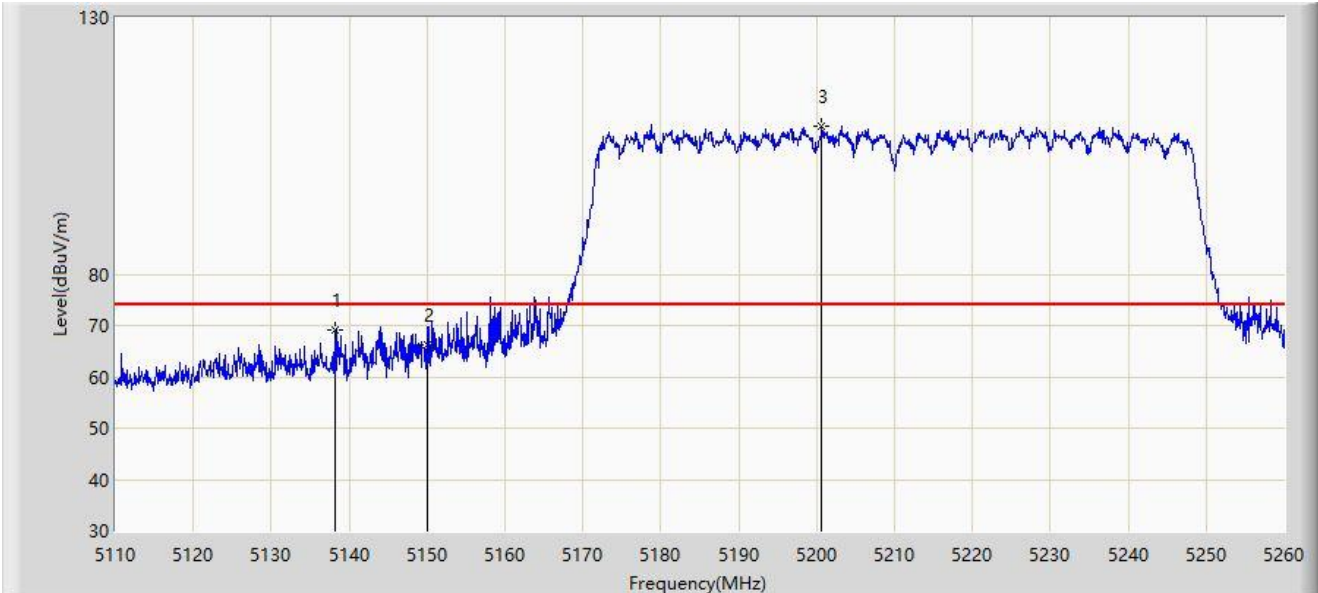

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5138.125	69.061	65.710	-4.939	74.000	3.351	PK
2		5150.000	66.347	62.865	-7.653	74.000	3.482	PK
3		5200.675	108.837	105.976	N/A	N/A	2.861	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).