


Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5755MHz	

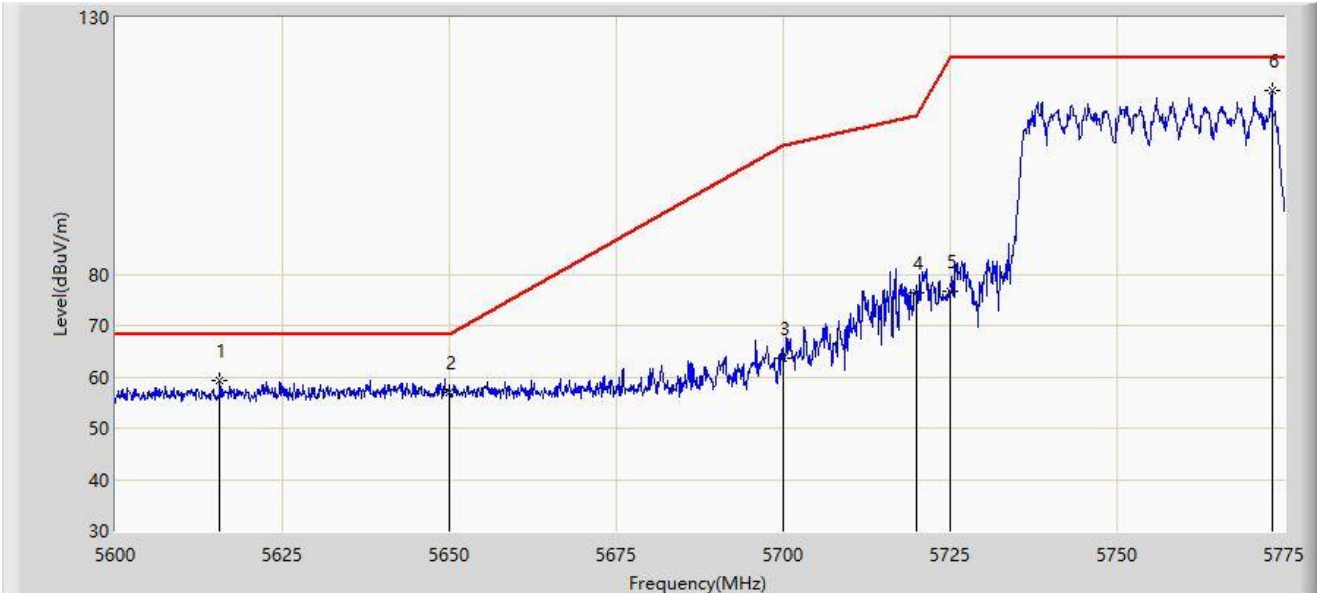


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5615.663	59.204	55.462	-8.996	68.200	3.742	PK
2		5650.000	57.090	52.967	-11.110	68.200	4.122	PK
3		5700.000	63.739	59.302	-41.461	105.200	4.437	PK
4		5720.000	76.519	71.855	-34.281	110.800	4.663	PK
5		5725.000	76.739	72.036	-45.461	122.200	4.703	PK
6		5773.163	115.786	110.962	N/A	N/A	4.824	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5755MHz	

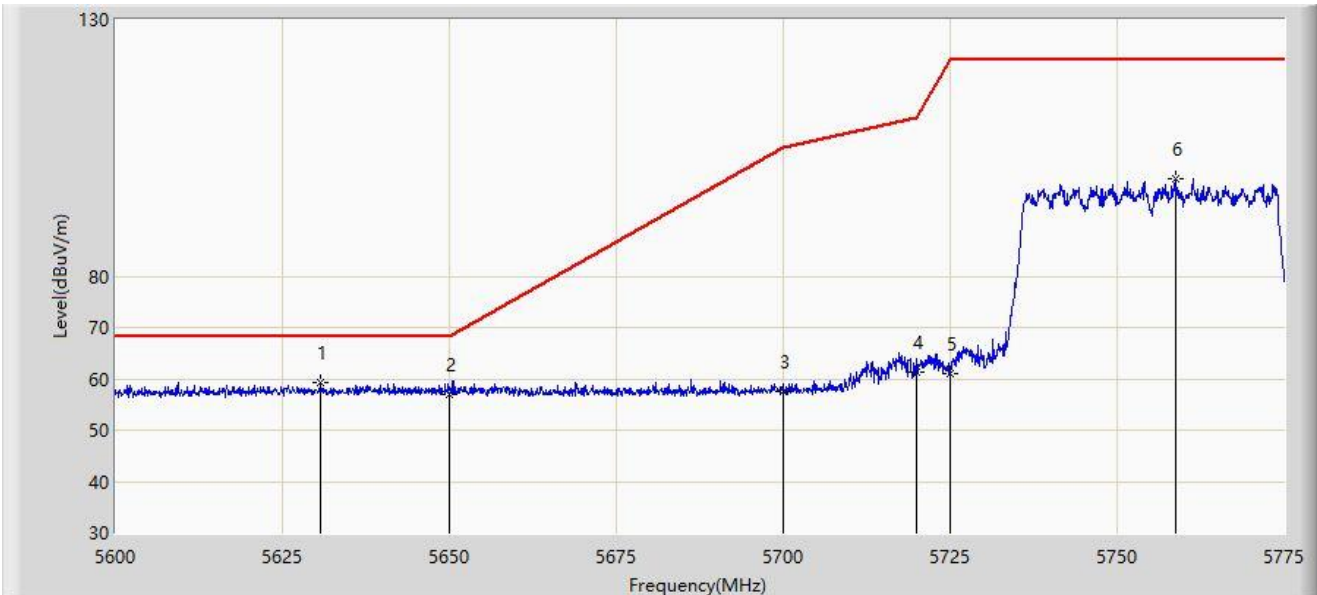


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5630.712	59.284	55.247	-8.916	68.200	4.037	PK
2		5650.000	56.907	52.784	-11.293	68.200	4.122	PK
3		5700.000	57.432	52.995	-47.768	105.200	4.437	PK
4		5720.000	61.160	56.496	-49.640	110.800	4.663	PK
5		5725.000	60.936	56.233	-61.264	122.200	4.703	PK
6		5758.812	99.094	94.509	N/A	N/A	4.585	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5795MHz	

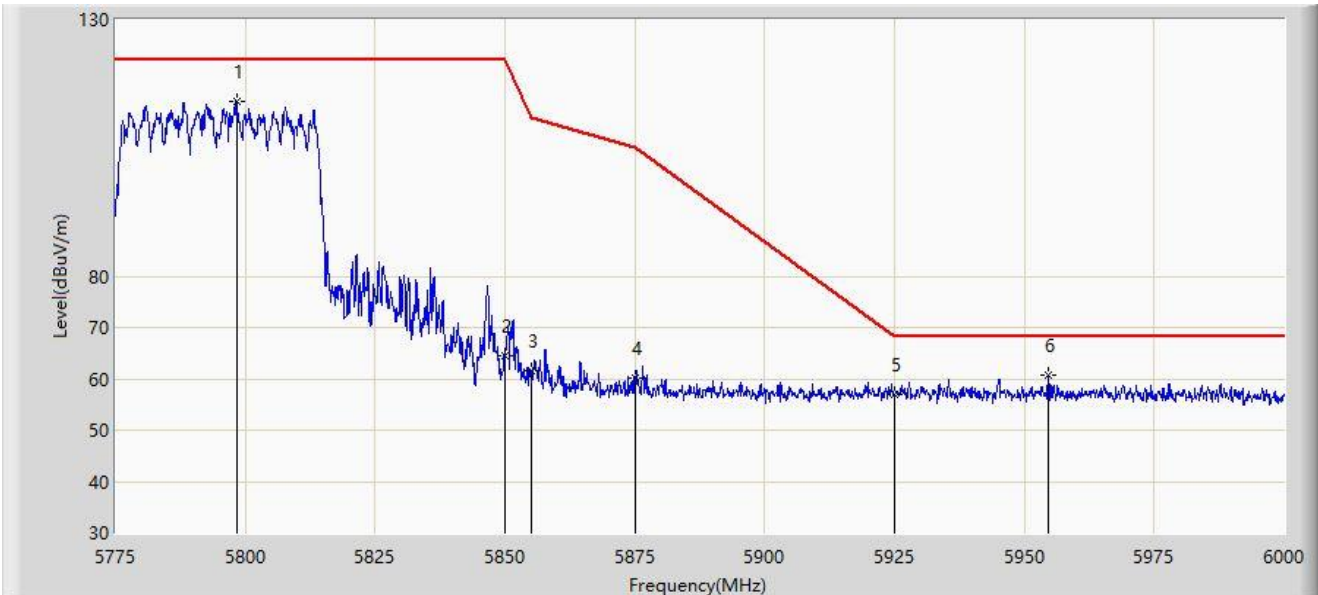


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5798.288	114.129	109.055	N/A	N/A	5.074	PK
2		5850.000	64.457	59.474	-57.743	122.200	4.984	PK
3		5855.000	61.609	56.571	-49.191	110.800	5.038	PK
4		5875.000	60.005	54.874	-45.195	105.200	5.131	PK
5		5925.000	56.861	51.626	-11.339	68.200	5.236	PK
6	*	5954.550	60.652	55.278	-7.548	68.200	5.373	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5795MHz	

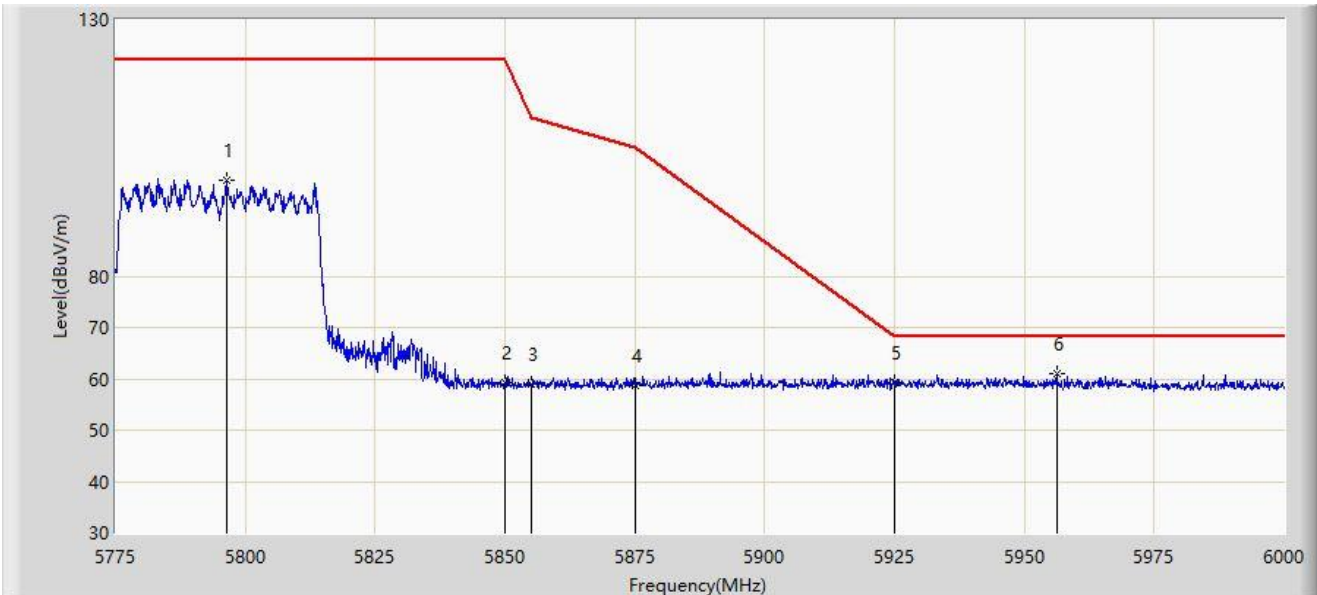


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5796.487	98.795	93.721	N/A	N/A	5.075	PK
2		5850.000	59.255	54.272	-62.945	122.200	4.984	PK
3		5855.000	58.861	53.823	-51.939	110.800	5.038	PK
4		5875.000	58.823	53.692	-46.377	105.200	5.131	PK
5		5925.000	59.149	53.914	-9.051	68.200	5.236	PK
6	*	5956.237	60.949	55.569	-7.251	68.200	5.380	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT80 at 5210MHz	

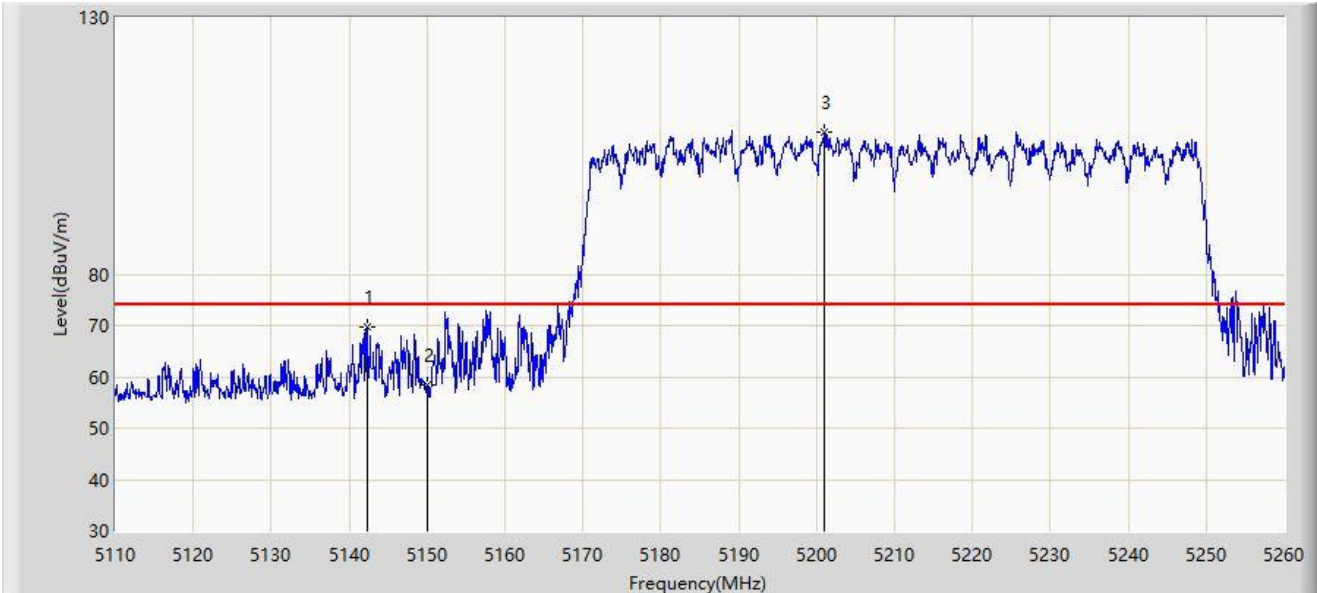


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5142.250	69.770	66.367	-4.230	74.000	3.403	PK
2		5150.000	58.280	54.798	-15.720	74.000	3.482	PK
3		5200.975	107.693	104.831	N/A	N/A	2.862	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT80 at 5210MHz	

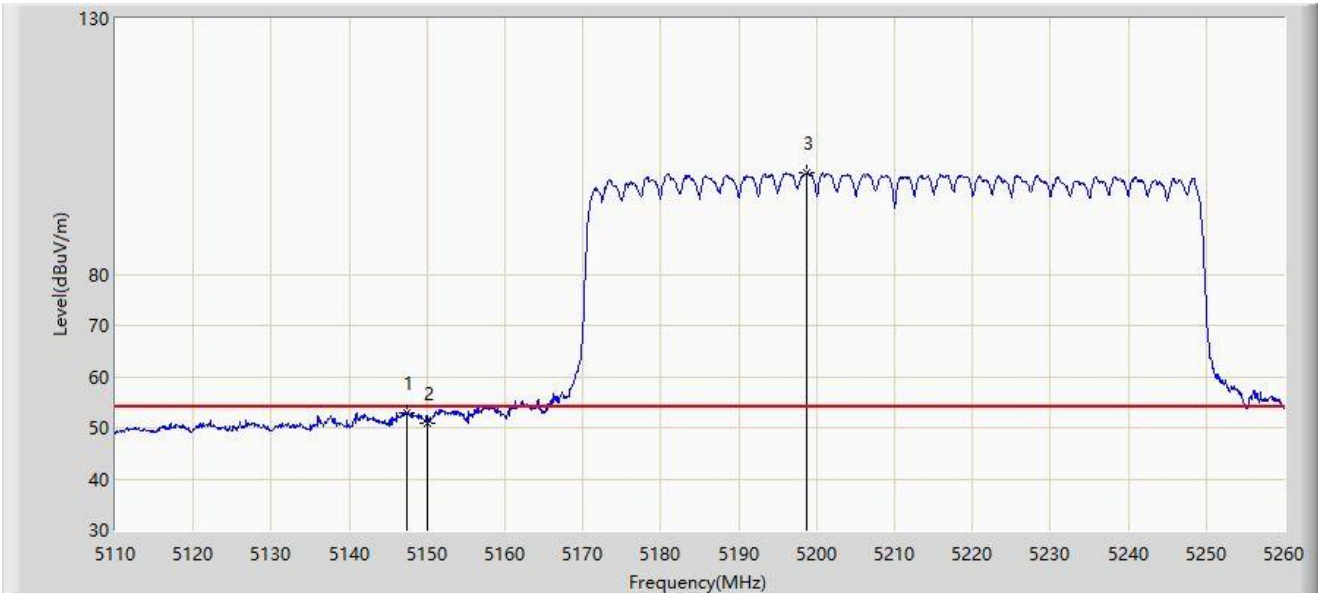


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5147.425	53.023	49.555	-0.977	54.000	3.469	AV
2		5150.000	50.943	47.461	-3.057	54.000	3.482	AV
3		5198.800	99.742	96.884	N/A	N/A	2.859	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT80 at 5210MHz	

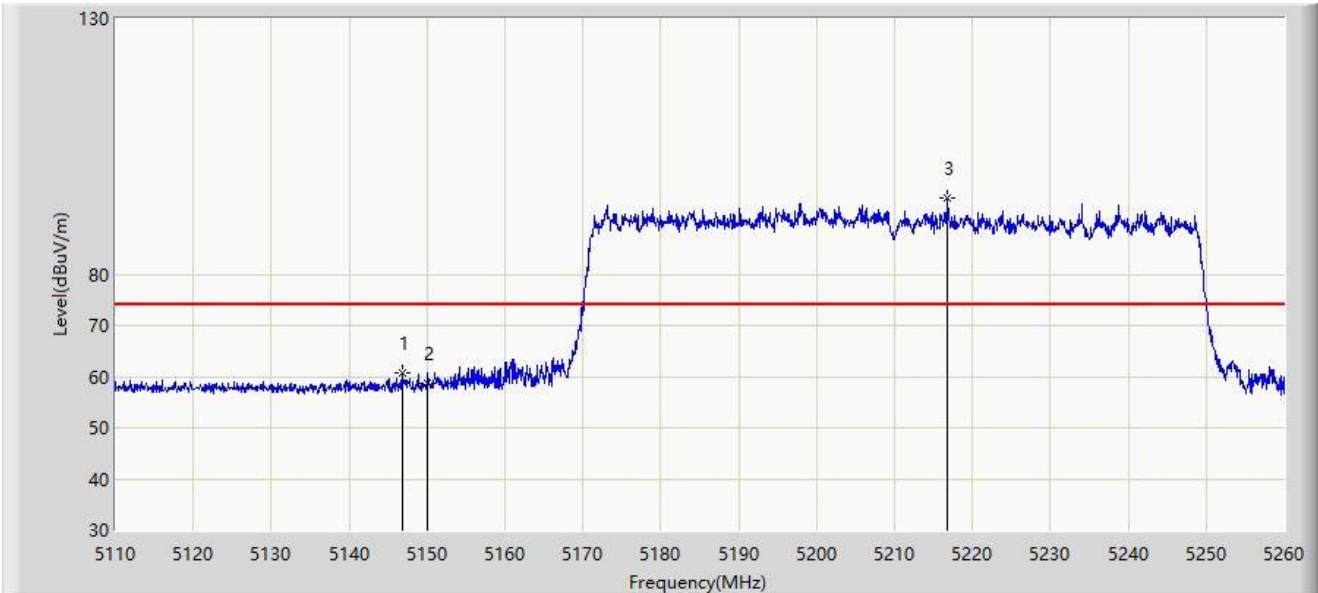


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5146.825	60.688	57.227	-13.312	74.000	3.460	PK
2		5150.000	58.603	55.121	-15.397	74.000	3.482	PK
3		5216.800	95.044	92.111	N/A	N/A	2.933	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT80 at 5210MHz	

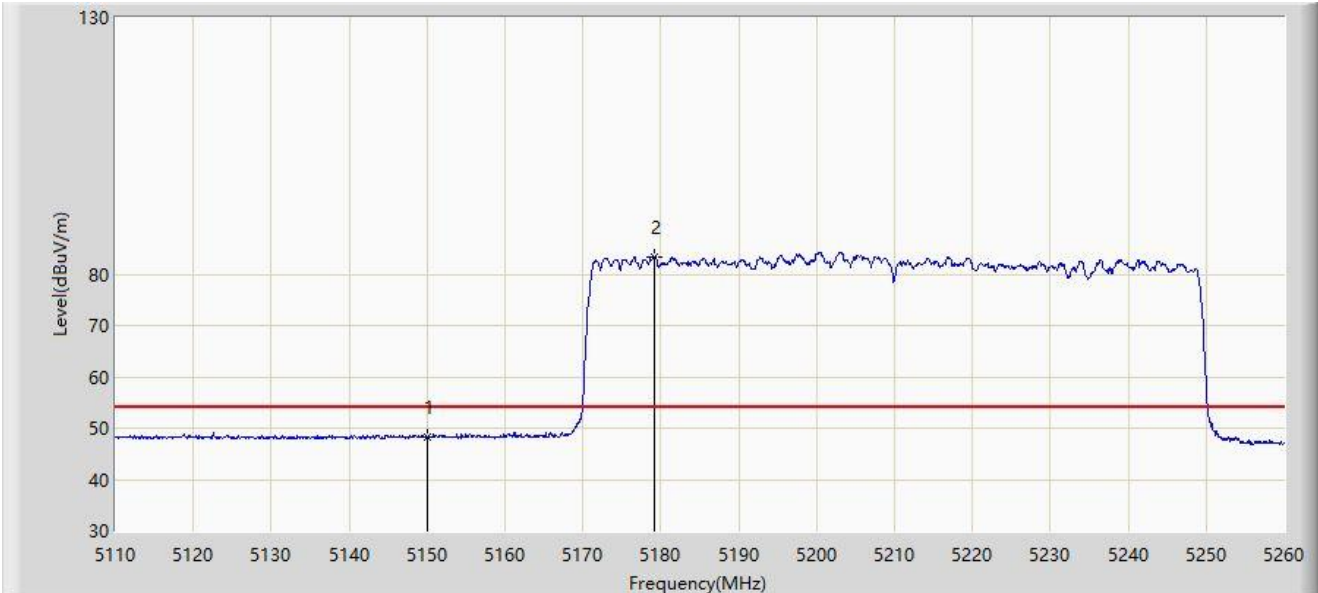

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	48.173	44.691	-5.827	54.000	3.482	AV
2		5179.225	83.475	80.190	N/A	N/A	3.284	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT80 at 5290MHz	

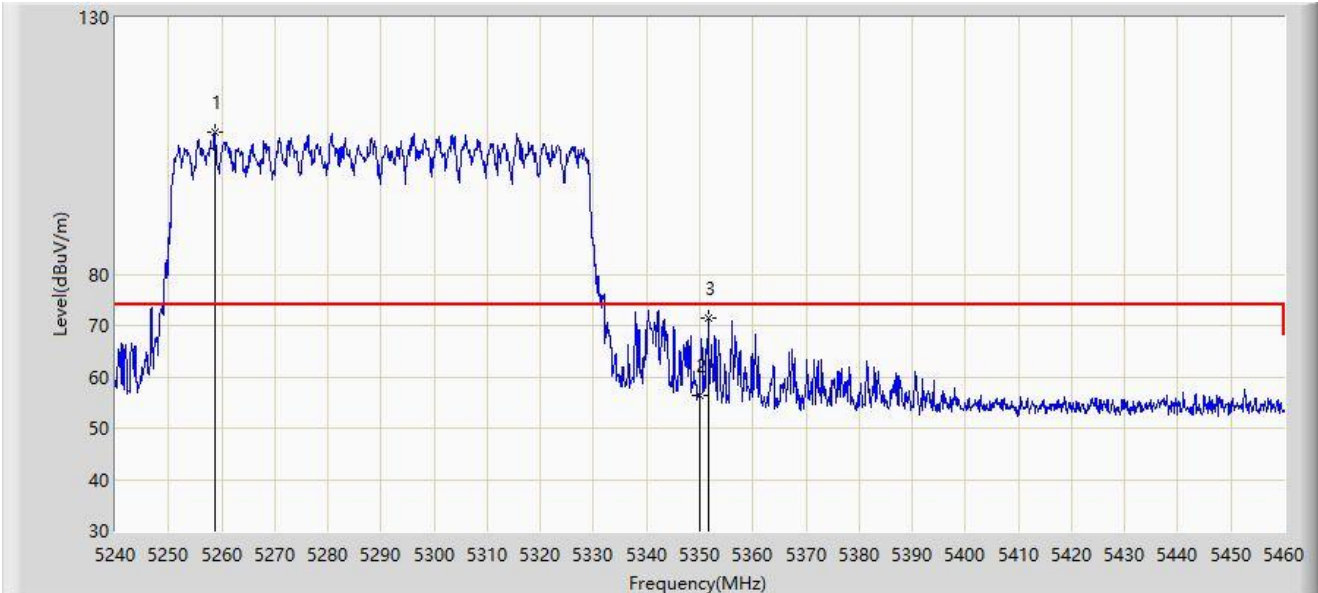


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5258.700	107.613	104.608	N/A	N/A	3.005	PK
2		5350.000	56.238	53.418	-17.762	74.000	2.820	PK
3	*	5351.650	71.499	68.707	-2.501	74.000	2.792	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT80 at 5290MHz	

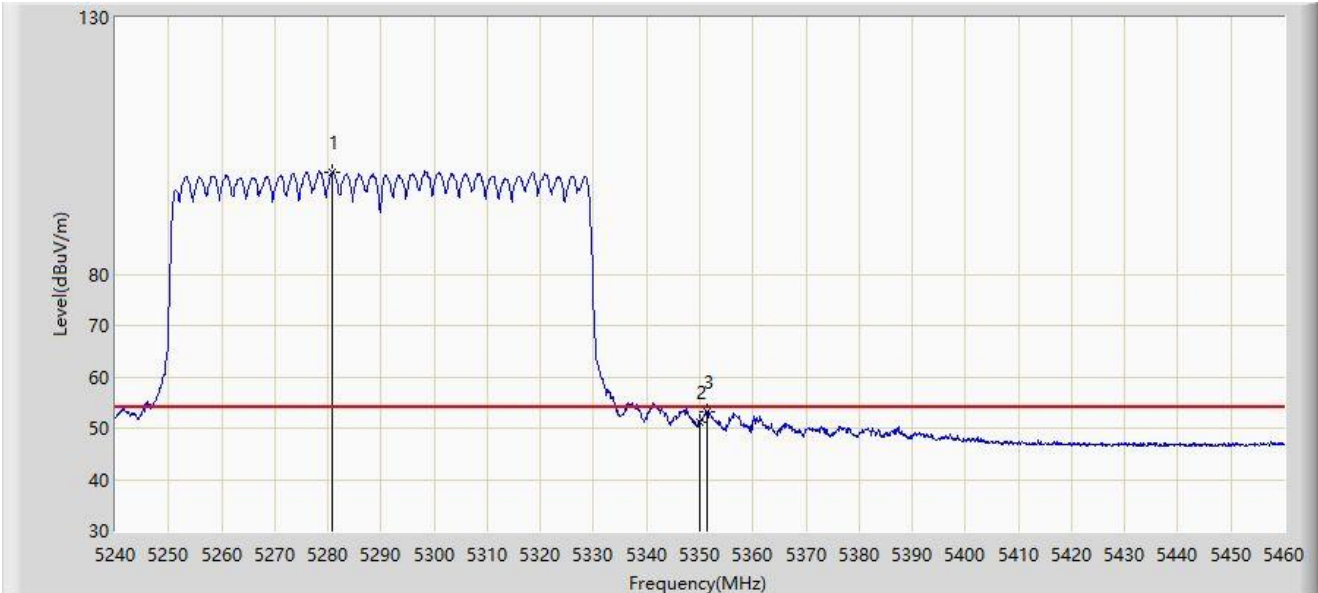


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5280.920	99.781	97.242	N/A	N/A	2.540	AV
2		5350.000	51.235	48.415	-2.765	54.000	2.820	AV
3	*	5351.430	53.305	50.509	-0.695	54.000	2.796	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT80 at 5290MHz	

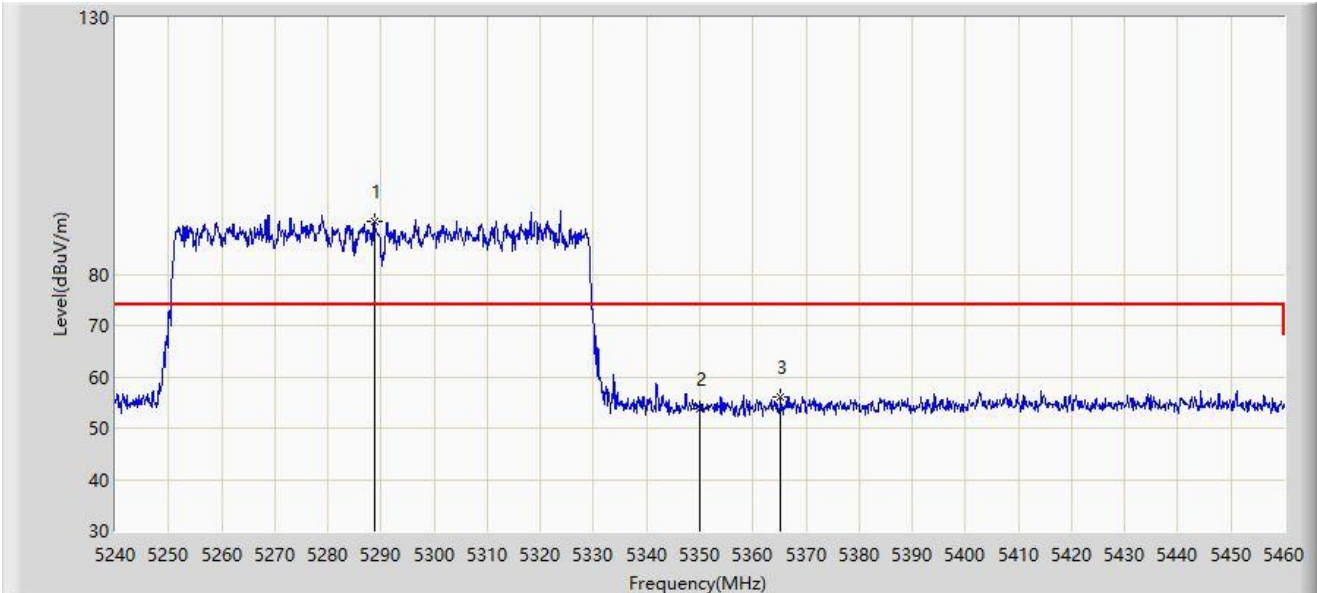


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5288.730	90.155	87.572	N/A	N/A	2.583	PK
2		5350.000	53.678	50.858	-20.322	74.000	2.820	PK
3	*	5365.180	56.096	53.251	-17.904	74.000	2.845	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT80 at 5290MHz	

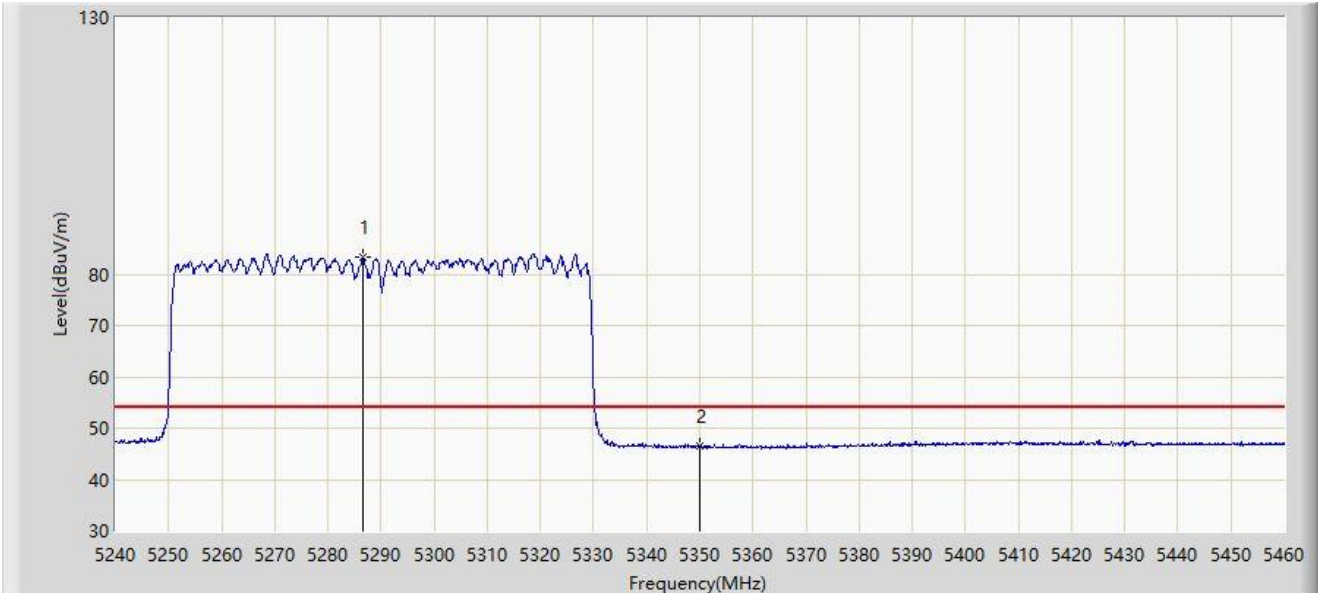


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5286.530	83.326	80.774	N/A	N/A	2.552	AV
2	*	5350.000	46.443	43.623	-7.557	54.000	2.820	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT80 at 5530MHz	

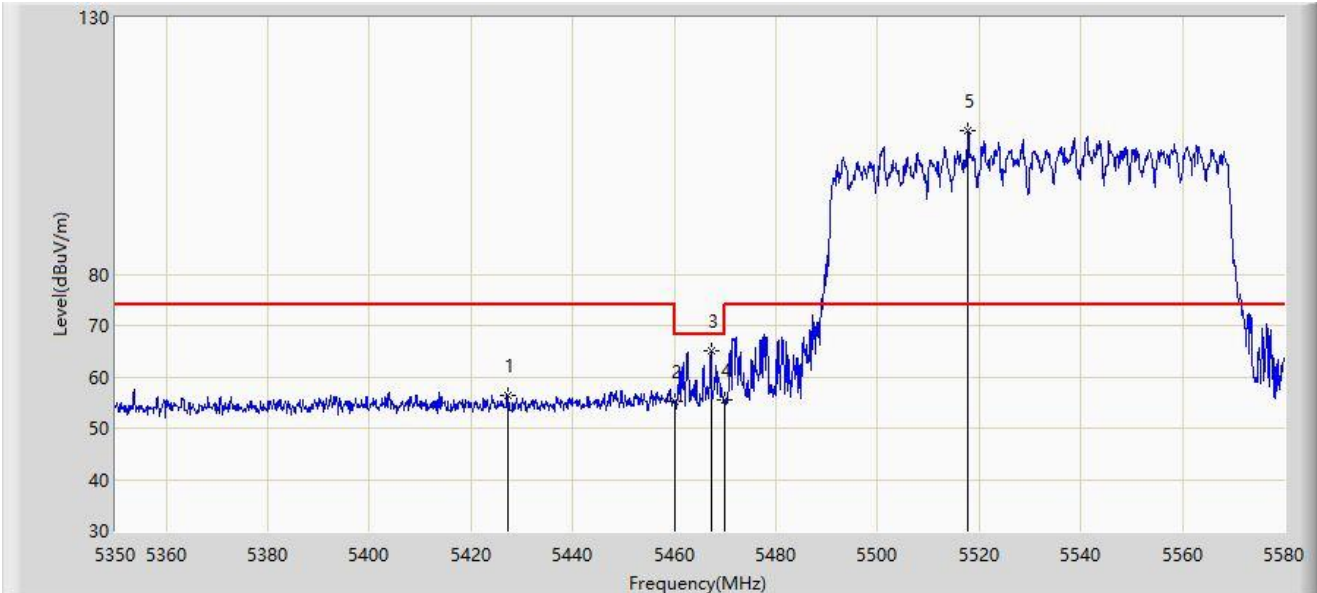


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5427.165	56.267	52.983	-17.733	74.000	3.283	PK
2		5460.000	55.216	52.067	-18.784	74.000	3.149	PK
3	*	5467.185	65.059	61.771	-3.141	68.200	3.288	PK
4		5470.000	55.455	52.113	-12.745	68.200	3.341	PK
5		5517.785	108.107	105.049	N/A	N/A	3.058	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT80 at 5530MHz	

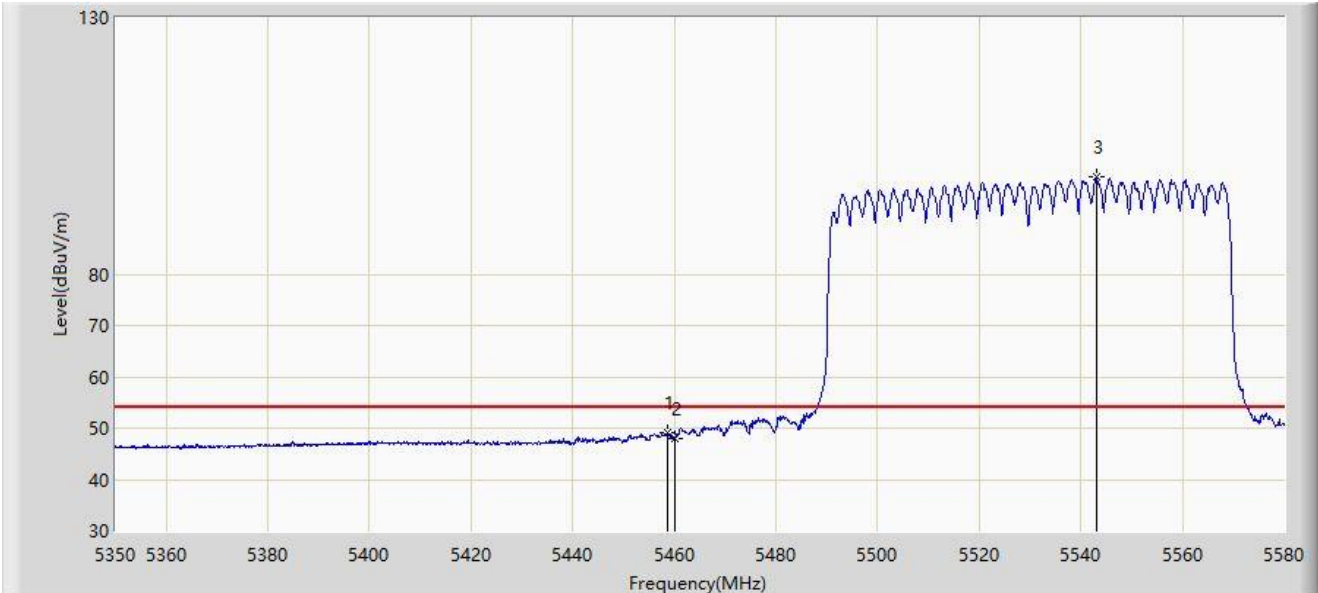


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5458.560	49.267	46.146	-4.733	54.000	3.122	AV
2		5460.000	48.089	44.940	-5.911	54.000	3.149	AV
3		5543.200	98.931	95.575	N/A	N/A	3.357	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT80 at 5530MHz	

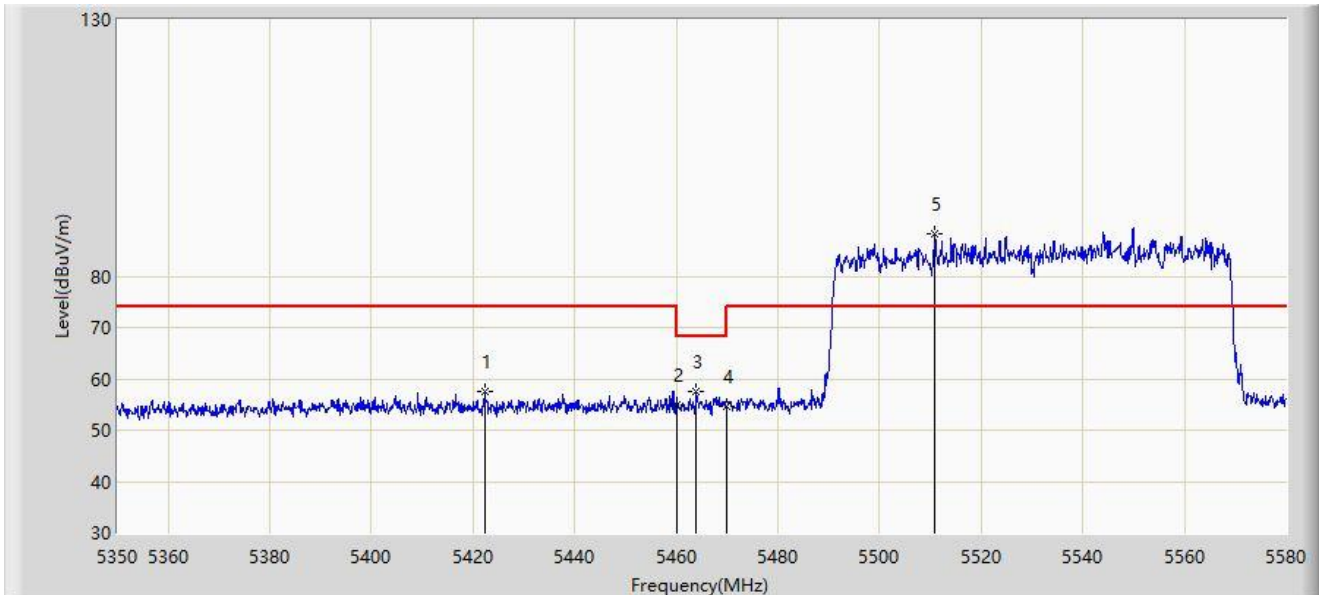


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5422.220	57.587	54.246	-16.413	74.000	3.340	PK
2		5460.000	55.002	51.853	-18.998	74.000	3.149	PK
3	*	5463.965	57.571	54.345	-10.629	68.200	3.225	PK
4		5470.000	54.654	51.312	-13.546	68.200	3.341	PK
5		5510.885	88.370	85.280	N/A	N/A	3.090	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT80 at 5530MHz	

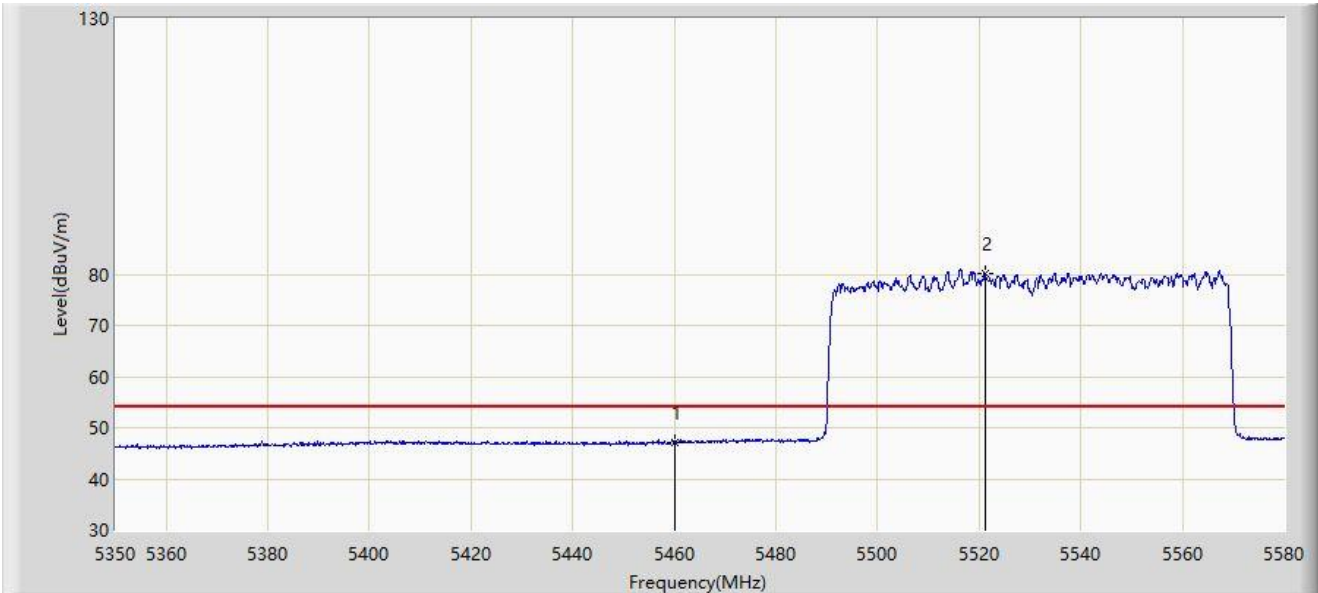

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5460.000	47.044	43.895	-6.956	54.000	3.149	AV
2		5521.235	80.158	77.116	N/A	N/A	3.042	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT80 at 5610MHz	

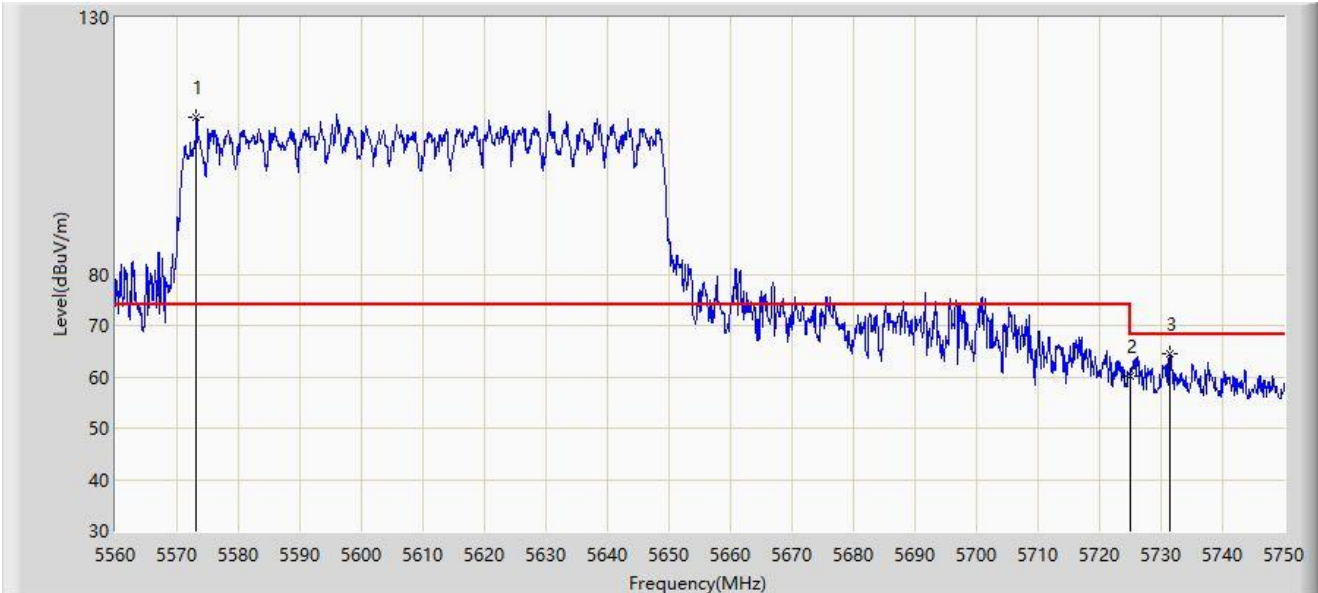


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5573.205	110.549	107.109	N/A	N/A	3.439	PK
2		5725.000	60.069	55.366	-8.131	68.200	4.703	PK
3	*	5731.380	64.407	59.787	-3.793	68.200	4.620	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT80 at 5610MHz	

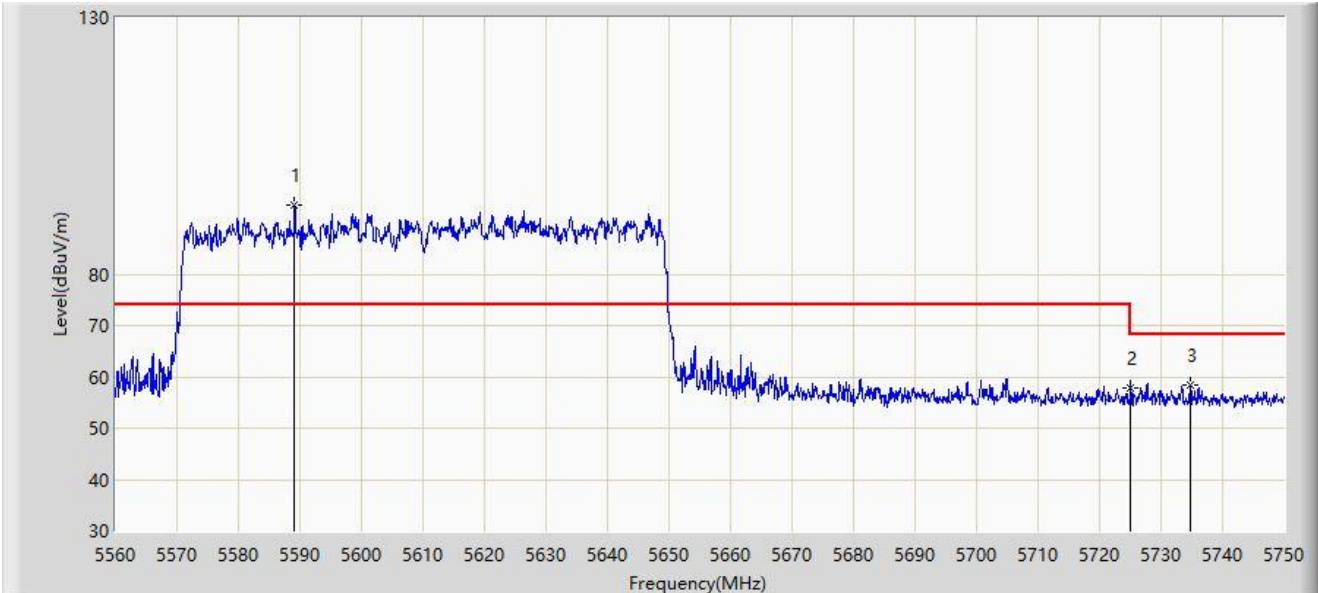


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5589.165	93.606	90.185	N/A	N/A	3.421	PK
2		5725.000	57.856	53.153	-10.344	68.200	4.703	PK
3	*	5734.800	58.469	53.910	-9.731	68.200	4.560	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT80 at 5775MHz	

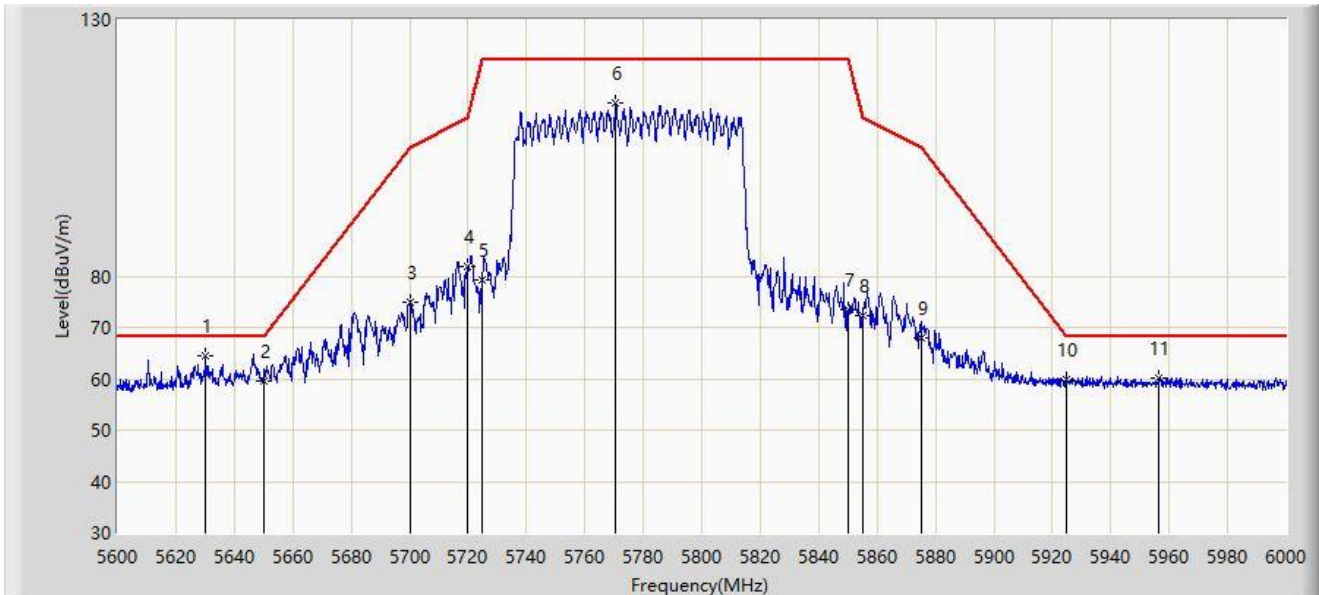


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5630.200	64.625	60.594	-3.575	68.200	4.031	PK
2		5650.000	59.695	55.572	-8.505	68.200	4.122	PK
3		5700.000	74.998	70.561	-30.202	105.200	4.437	PK
4		5720.000	81.876	77.212	-28.924	110.800	4.663	PK
5		5725.000	79.138	74.435	-43.062	122.200	4.703	PK
6		5770.600	113.889	109.104	N/A	N/A	4.785	PK
7		5850.000	73.559	68.576	-48.641	122.200	4.984	PK
8		5855.000	72.300	67.262	-38.500	110.800	5.038	PK
9		5875.000	67.945	62.814	-37.255	105.200	5.131	PK
10		5925.000	59.850	54.615	-8.350	68.200	5.236	PK
11		5956.400	60.216	54.836	-7.984	68.200	5.380	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5.8G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT80 at 5775MHz	

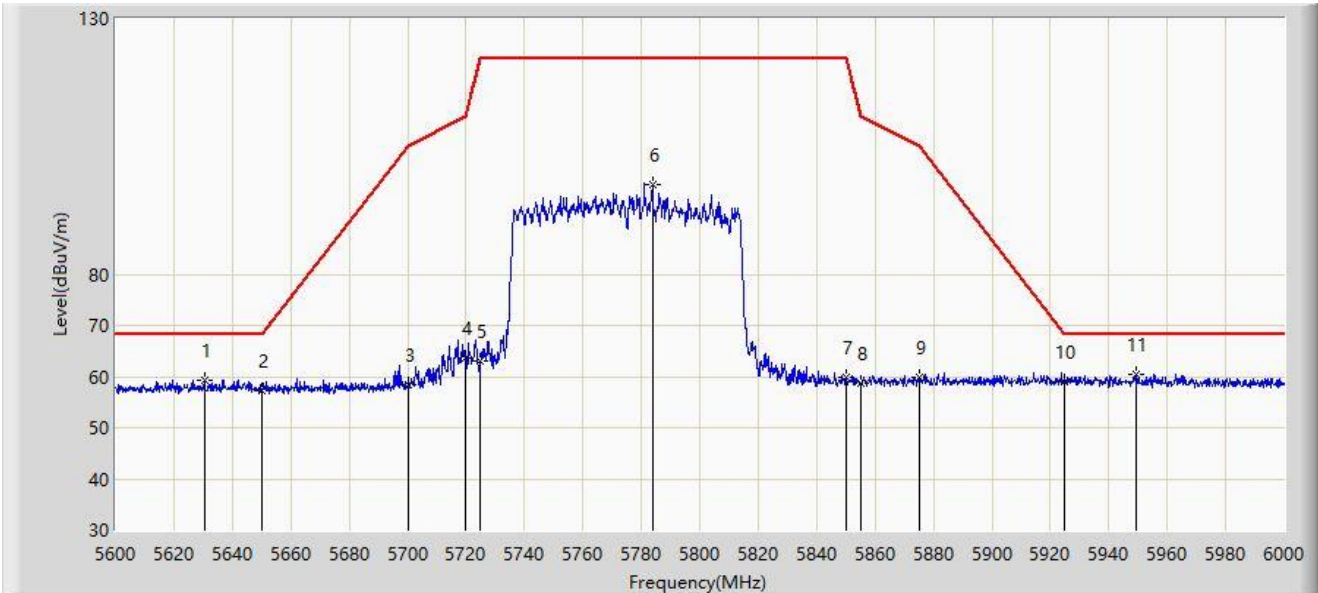


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5630.600	59.132	55.096	-9.068	68.200	4.037	PK
2		5650.000	57.383	53.260	-10.817	68.200	4.122	PK
3		5700.000	58.353	53.916	-46.847	105.200	4.437	PK
4		5720.000	63.510	58.846	-47.290	110.800	4.663	PK
5		5725.000	63.059	58.356	-59.141	122.200	4.703	PK
6		5784.000	97.624	92.667	N/A	N/A	4.957	PK
7		5850.000	59.863	54.880	-62.337	122.200	4.984	PK
8		5855.000	58.738	53.700	-52.062	110.800	5.038	PK
9		5875.000	59.833	54.702	-45.367	105.200	5.131	PK
10		5925.000	59.089	53.854	-9.111	68.200	5.236	PK
11	*	5949.400	60.330	54.976	-7.870	68.200	5.355	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT160 at 5250MHz	

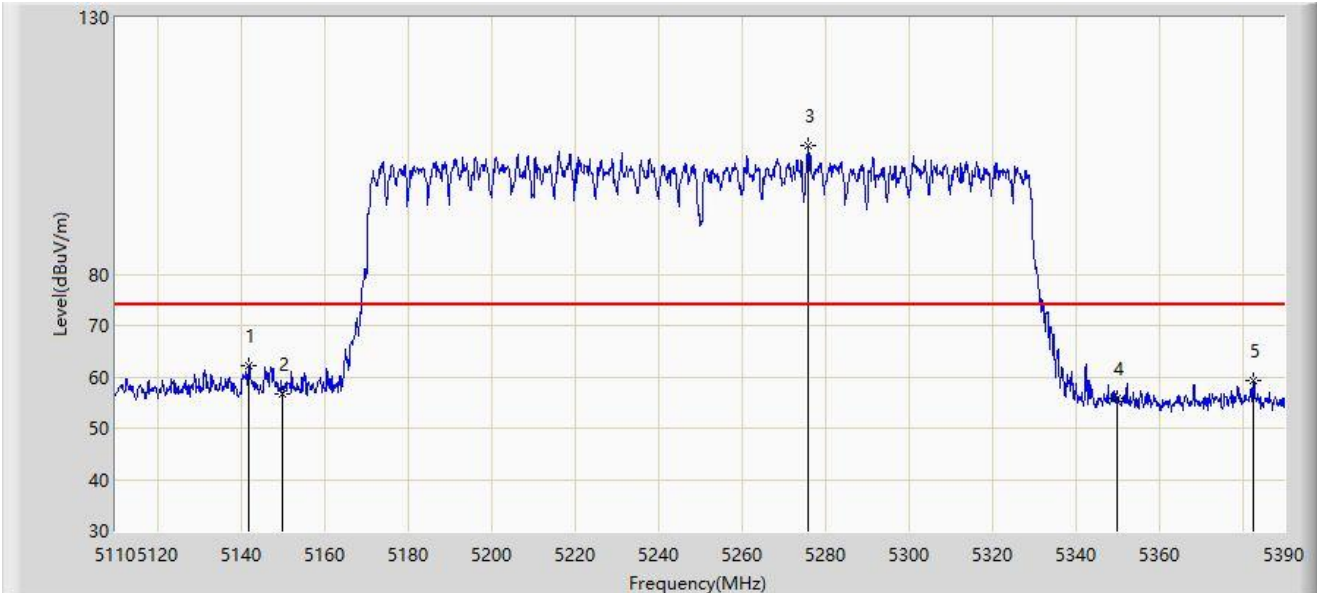


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5142.060	62.280	58.879	-11.720	74.000	3.400	PK
2		5150.000	56.681	53.199	-17.319	74.000	3.482	PK
3		5275.900	105.010	102.420	N/A	N/A	2.590	PK
4		5350.000	55.693	52.873	-18.307	74.000	2.820	PK
5		5382.720	59.265	56.137	-14.735	74.000	3.128	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT160 at 5250MHz	

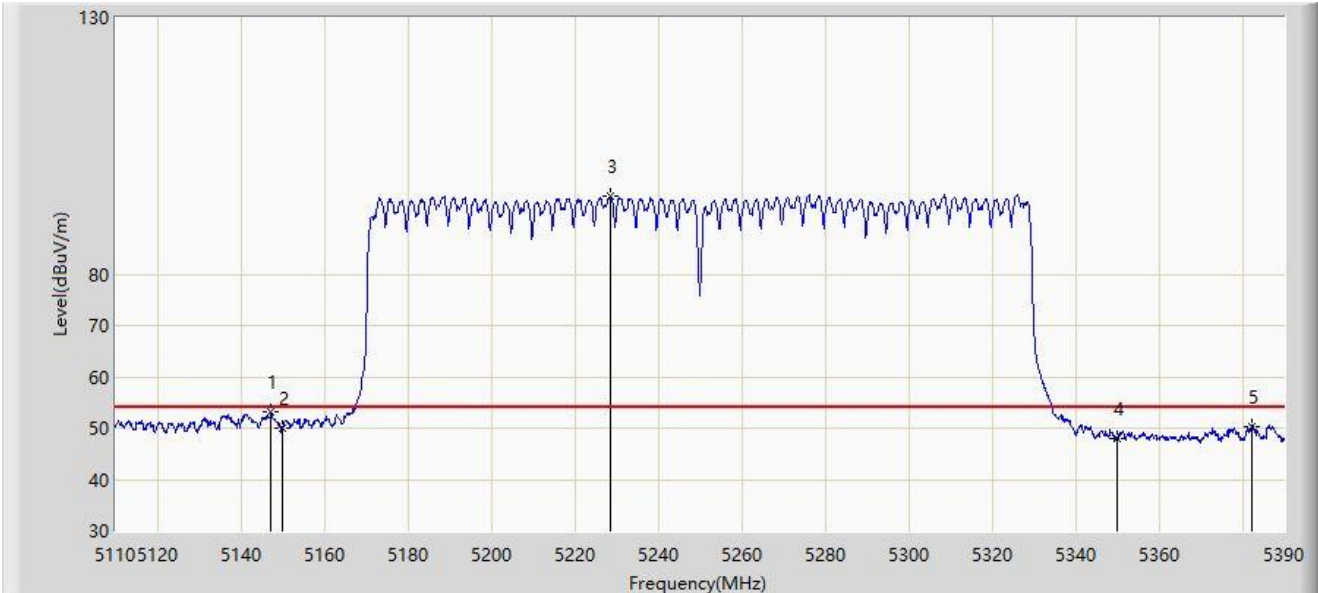


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.240	53.238	49.772	-0.762	54.000	3.466	AV
2		5150.000	50.078	46.596	-3.922	54.000	3.482	AV
3		5228.580	95.115	91.972	N/A	N/A	3.143	AV
4		5350.000	47.942	45.122	-6.058	54.000	2.820	AV
5		5382.160	50.385	47.268	-3.615	54.000	3.117	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT160 at 5250MHz	

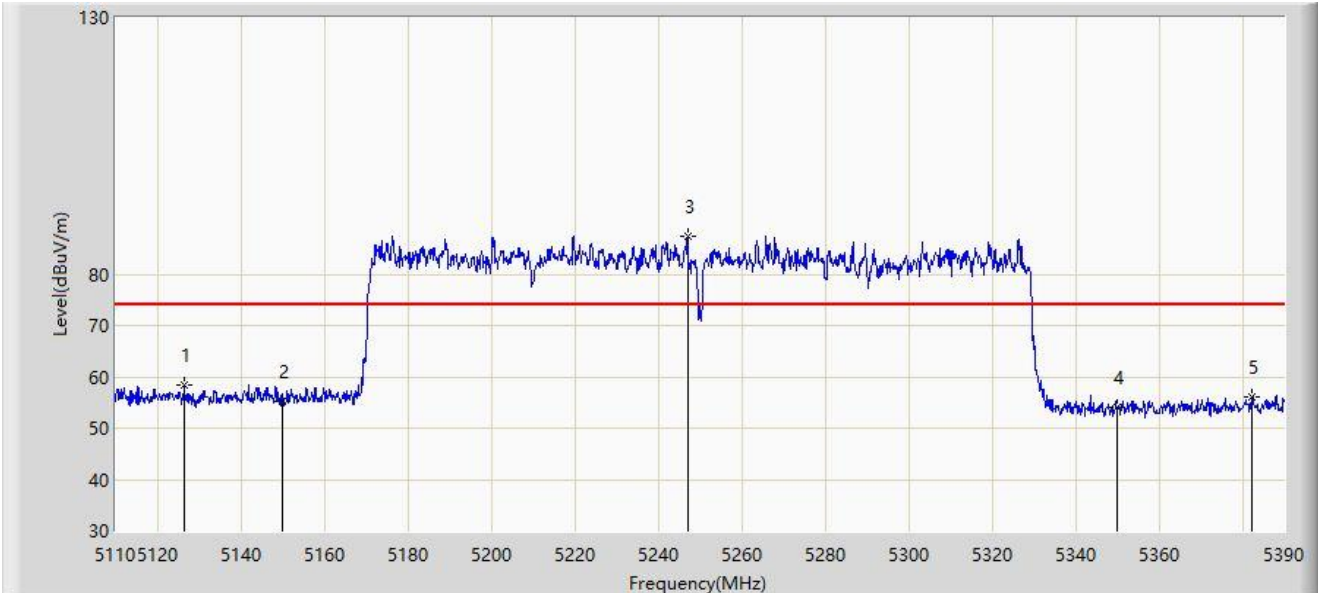


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5126.520	58.423	55.157	-15.577	74.000	3.265	PK
2		5150.000	55.180	51.698	-18.820	74.000	3.482	PK
3		5247.060	87.494	84.304	N/A	N/A	3.189	PK
4		5350.000	54.155	51.335	-19.845	74.000	2.820	PK
5		5382.440	56.037	52.914	-17.963	74.000	3.123	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT160 at 5250MHz	

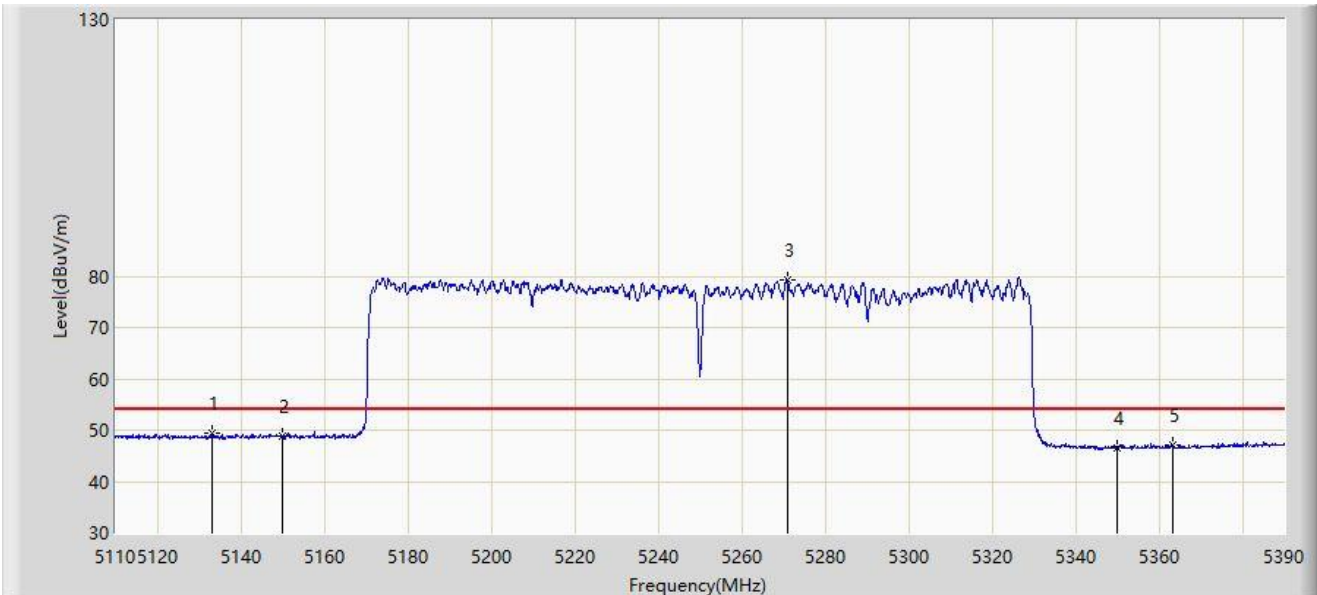

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5133.100	49.322	46.034	-4.678	54.000	3.287	AV
2		5150.000	48.795	45.313	-5.205	54.000	3.482	AV
3		5271.000	79.396	76.720	N/A	N/A	2.676	AV
4		5350.000	46.640	43.820	-7.360	54.000	2.820	AV
5		5363.400	47.235	44.398	-6.765	54.000	2.838	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT160 at 5570MHz	

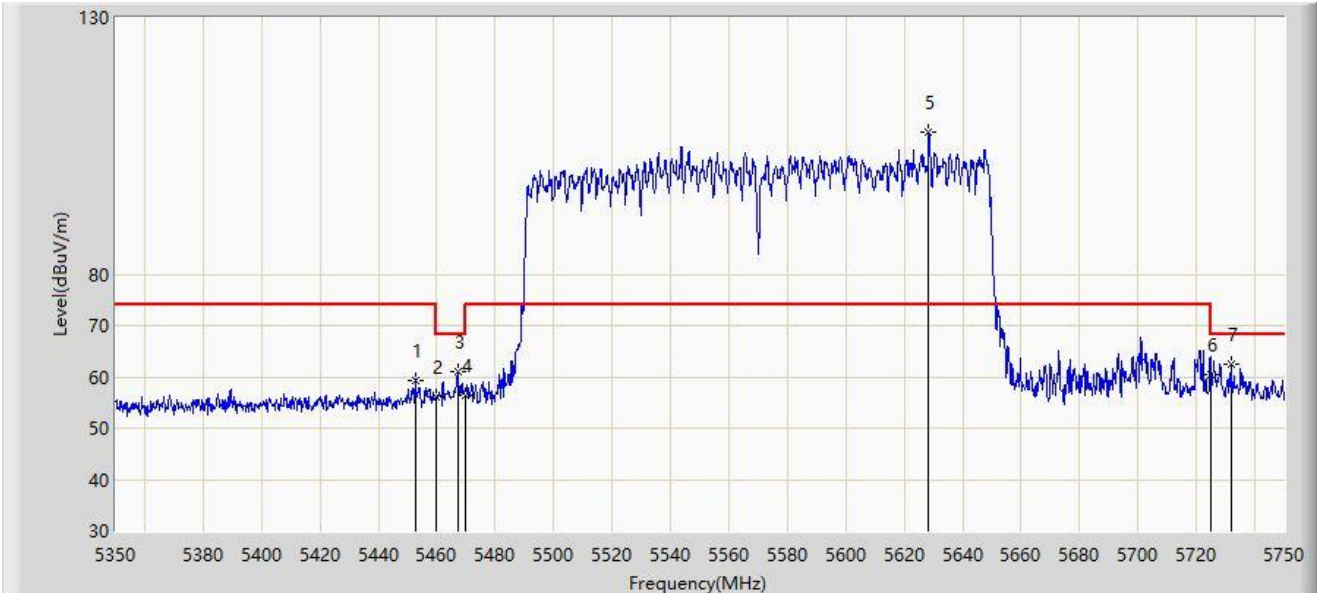


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5452.600	59.403	56.348	-14.597	74.000	3.055	PK
2		5460.000	56.203	53.054	-17.797	74.000	3.149	PK
3		5467.200	61.113	57.825	-7.087	68.200	3.288	PK
4		5470.000	56.471	53.129	-11.729	68.200	3.341	PK
5		5628.400	107.553	103.544	N/A	N/A	4.009	PK
6		5725.000	60.407	55.704	-7.793	68.200	4.703	PK
7	*	5731.800	62.539	57.927	-5.661	68.200	4.613	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT160 at 5570MHz	

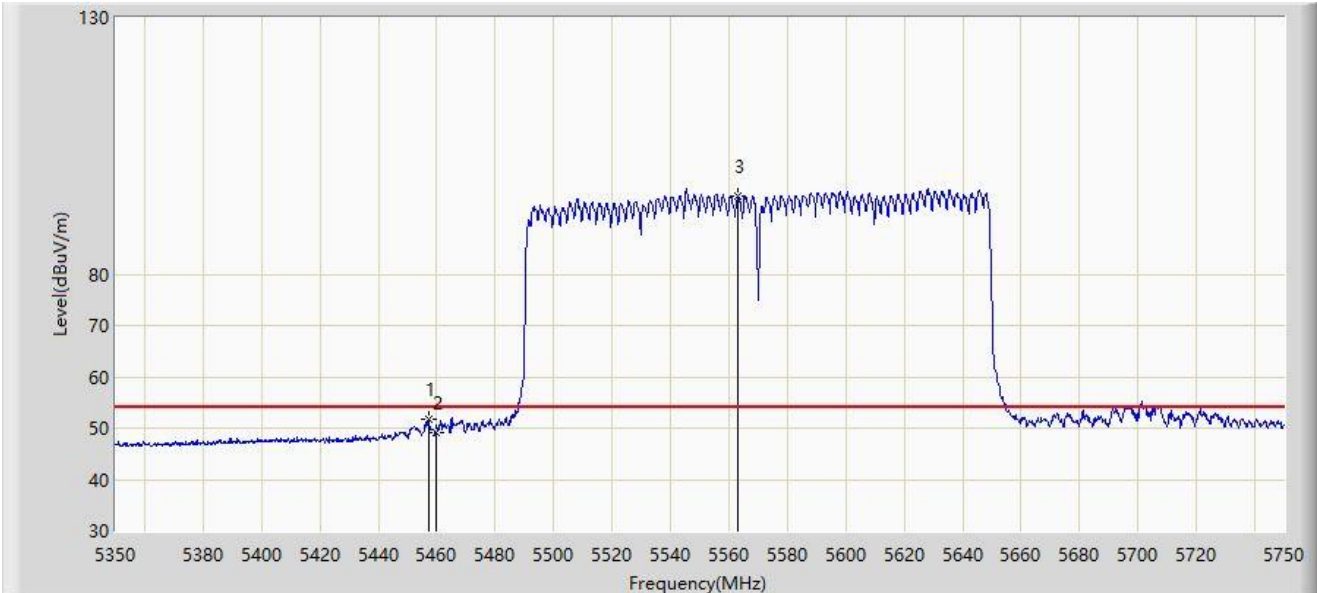


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5457.200	51.601	48.506	-2.399	54.000	3.095	AV
2		5460.000	49.037	45.888	-4.963	54.000	3.149	AV
3		5563.200	95.087	91.643	N/A	N/A	3.444	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT160 at 5570MHz	

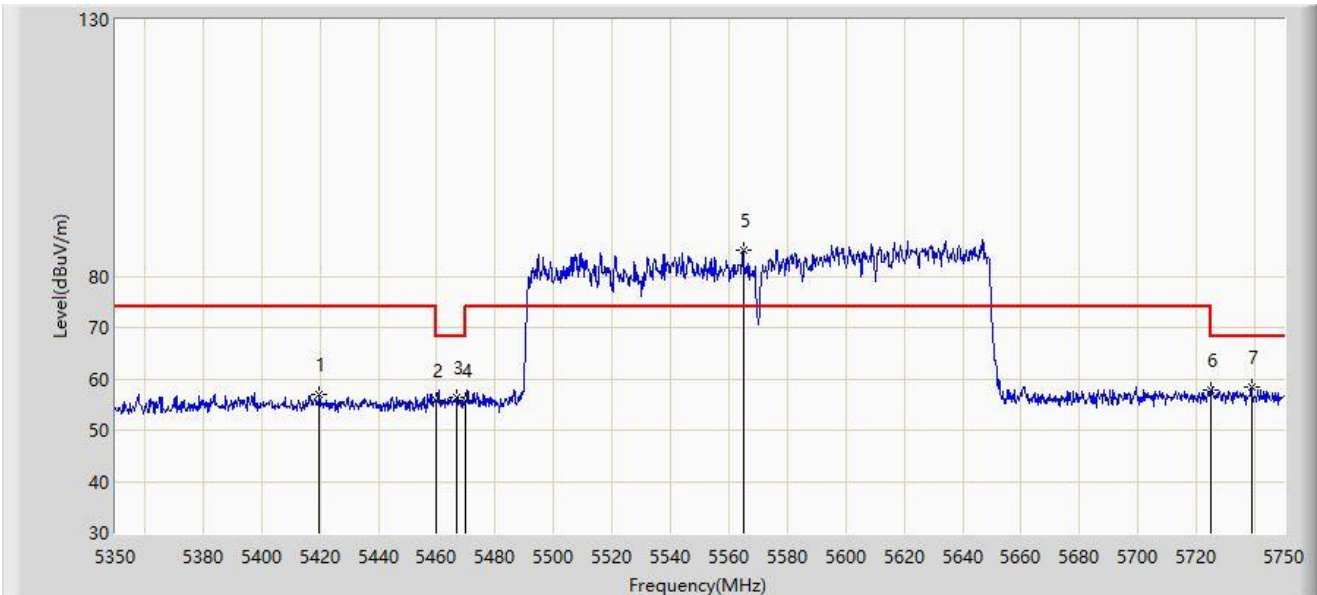


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5419.800	56.860	53.491	-17.140	74.000	3.370	PK
2		5460.000	55.801	52.652	-18.199	74.000	3.149	PK
3		5466.600	56.335	53.059	-11.865	68.200	3.277	PK
4		5470.000	55.784	52.442	-12.416	68.200	3.341	PK
5		5564.800	85.131	81.698	N/A	N/A	3.433	PK
6		5725.000	57.789	53.086	-10.411	68.200	4.703	PK
7	*	5738.800	58.506	54.018	-9.694	68.200	4.489	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-02
Limit: FCC_5G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT160 at 5570MHz	

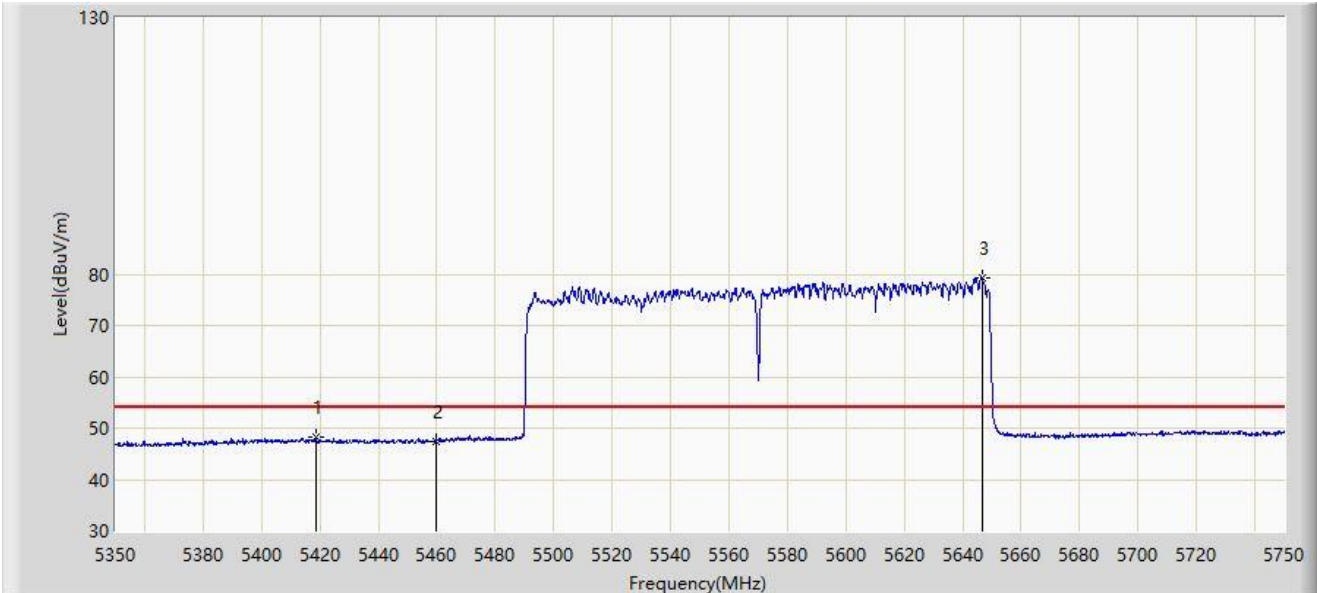

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5418.600	48.188	44.809	-5.812	54.000	3.378	AV
2		5460.000	47.340	44.191	-6.660	54.000	3.149	AV
3		5646.600	79.311	75.172	N/A	N/A	4.140	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

**ANT 312# Normal Mode:**

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

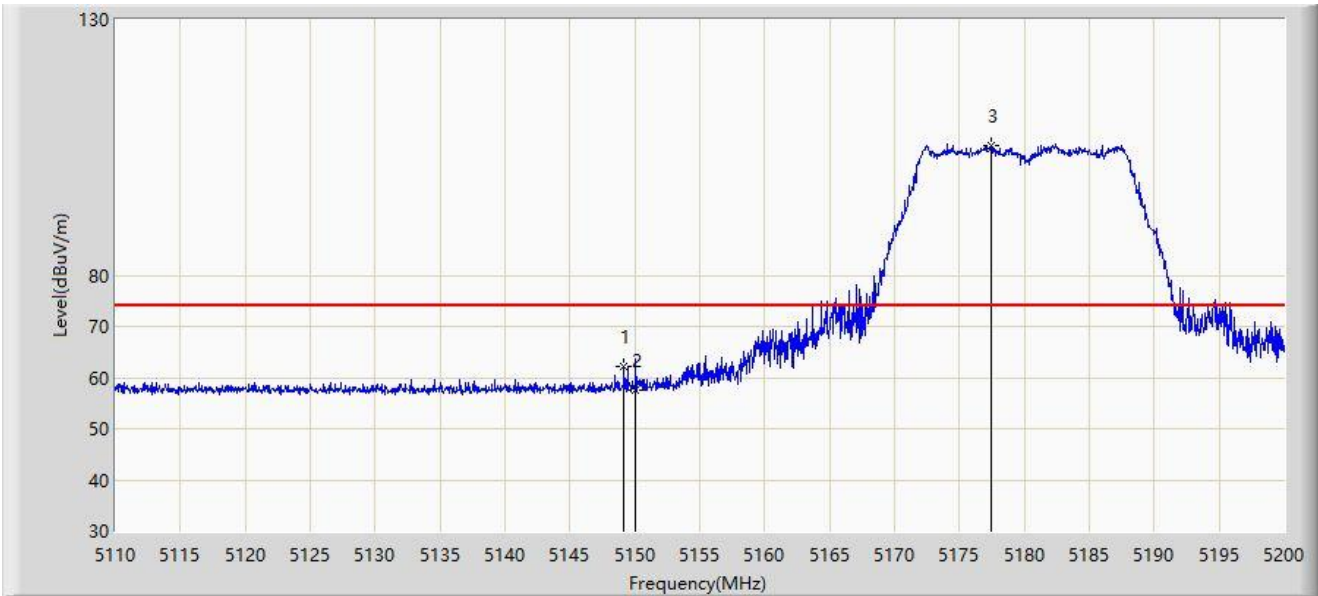


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5149.150	62.149	58.670	-11.851	74.000	3.479	PK
2		5150.000	57.560	54.078	-16.440	74.000	3.482	PK
3		5177.455	105.491	102.170	N/A	N/A	3.321	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

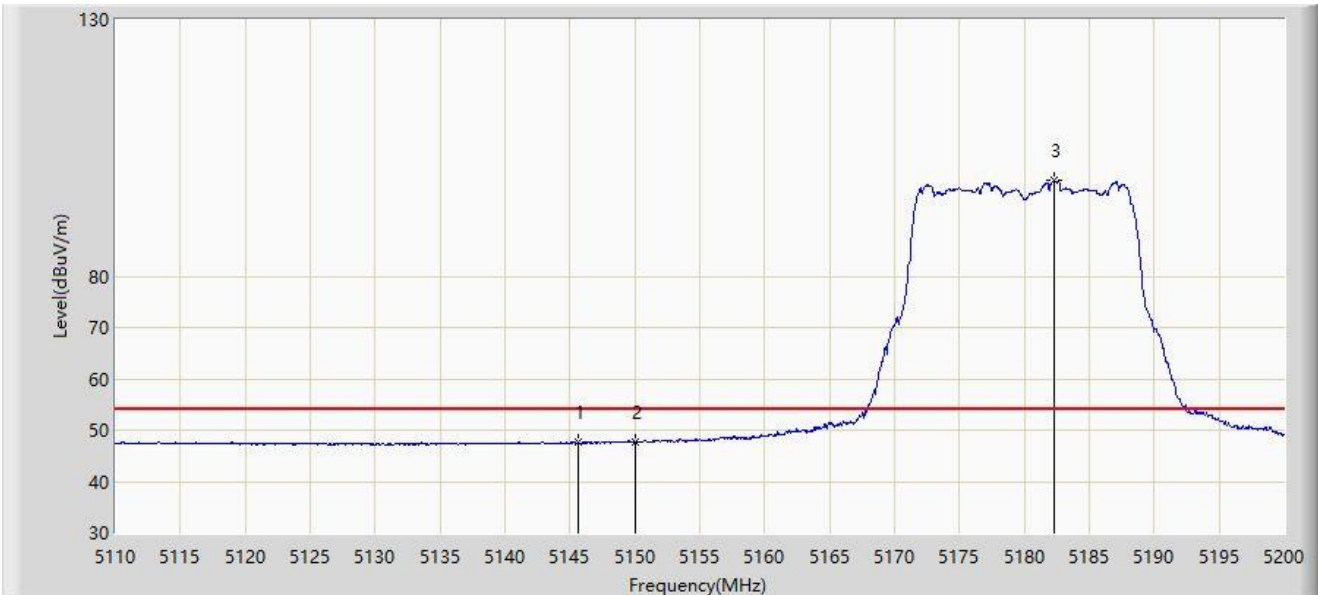


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5145.640	47.572	44.126	-6.428	54.000	3.445	AV
2	*	5150.000	47.638	44.156	-6.362	54.000	3.482	AV
3		5182.270	98.554	95.330	N/A	N/A	3.224	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

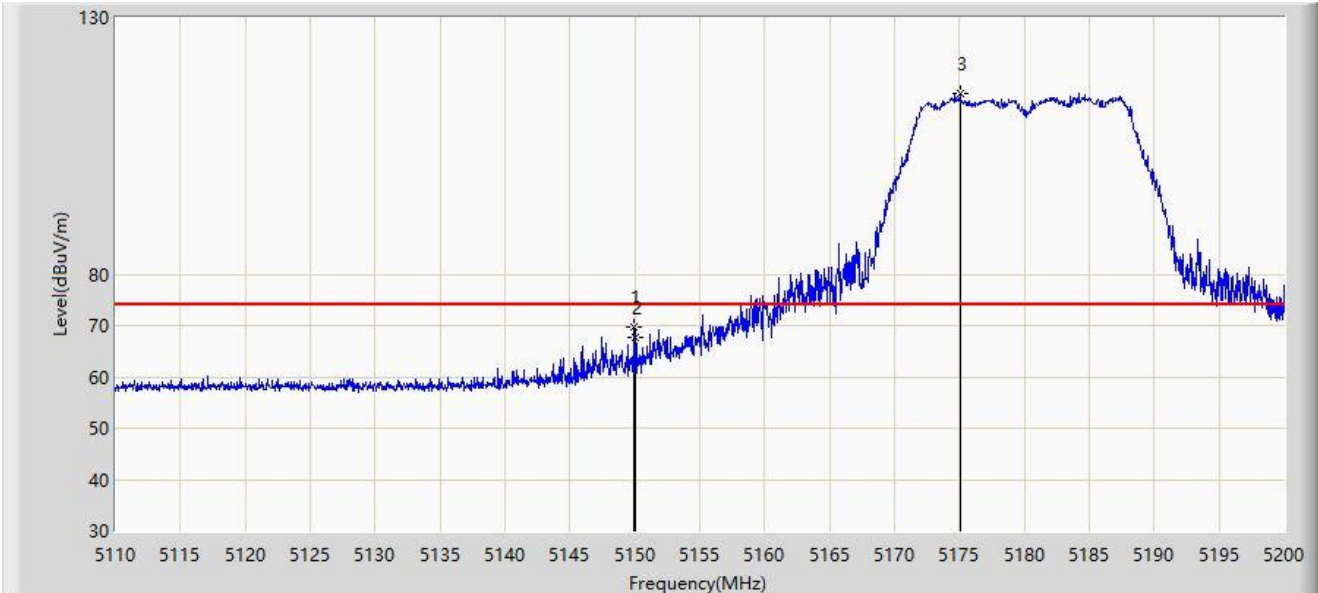


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5149.915	69.730	66.249	-4.270	74.000	3.482	PK
2		5150.000	67.572	64.090	-6.428	74.000	3.482	PK
3		5175.025	115.198	111.829	N/A	N/A	3.370	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

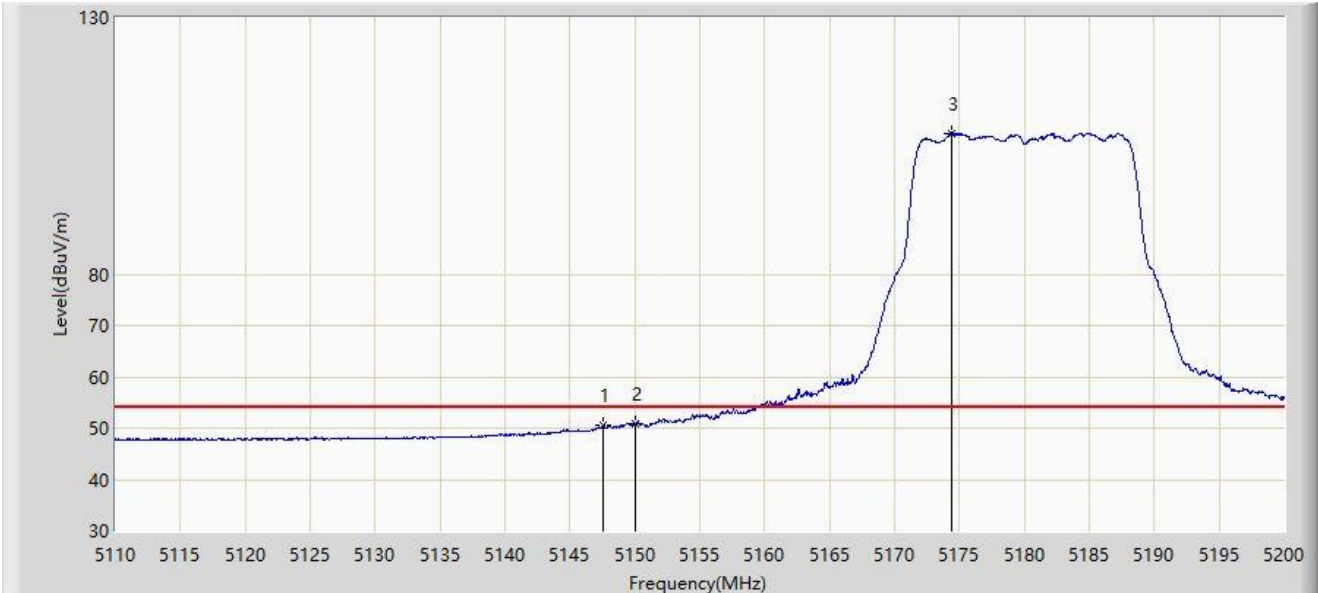

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5147.575	50.659	47.189	-3.341	54.000	3.471	AV
2	*	5150.000	50.872	47.390	-3.128	54.000	3.482	AV
3		5174.350	107.524	104.141	N/A	N/A	3.383	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

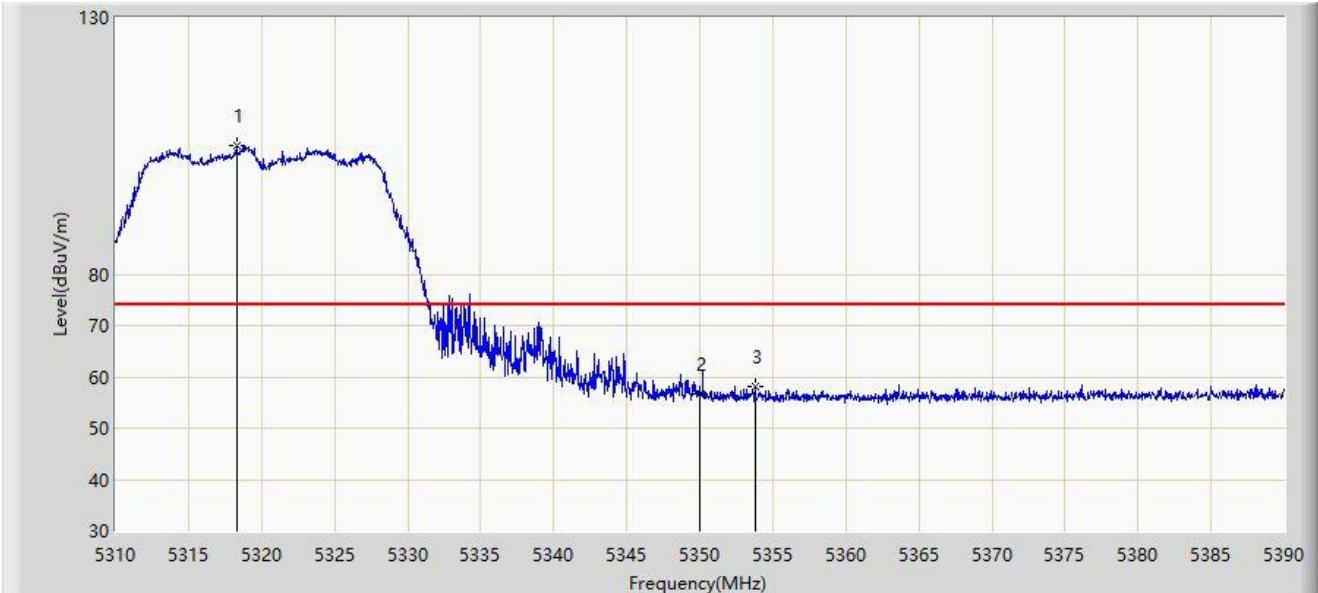


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5318.280	105.165	102.155	N/A	N/A	3.010	PK
2		5350.000	56.531	53.711	-17.469	74.000	2.820	PK
3	*	5353.760	58.160	55.366	-15.840	74.000	2.794	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

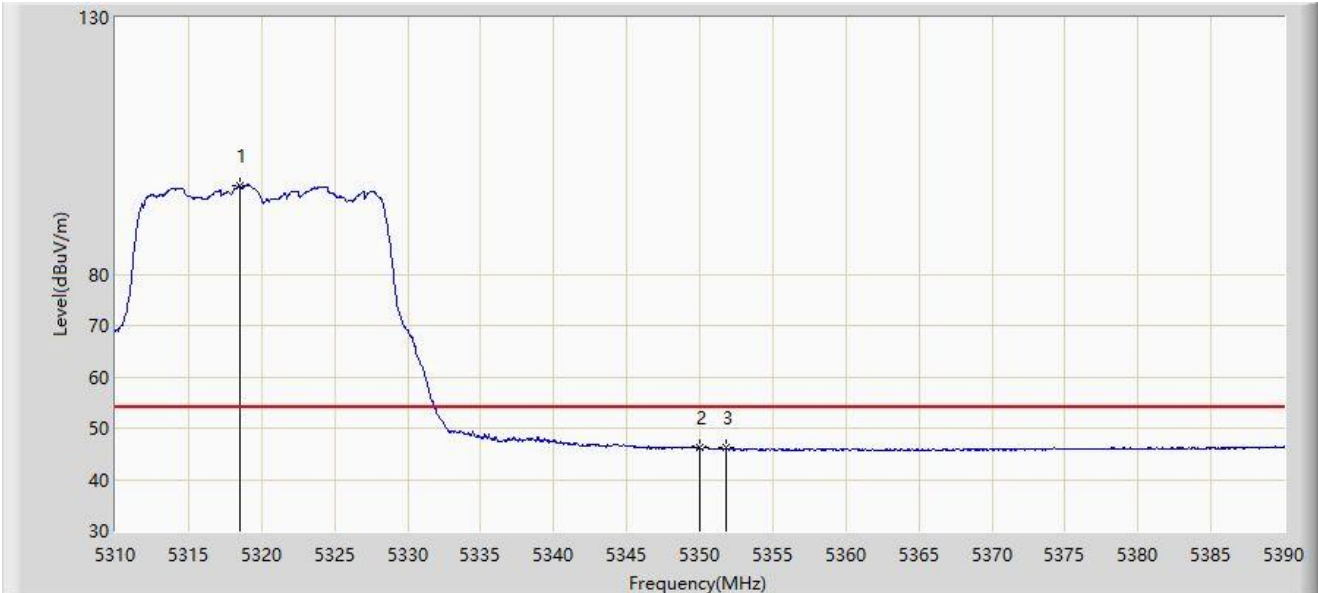


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5318.480	97.247	94.238	N/A	N/A	3.010	AV
2	*	5350.000	46.145	43.325	-7.855	54.000	2.820	AV
3		5351.760	46.130	43.340	-7.870	54.000	2.791	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

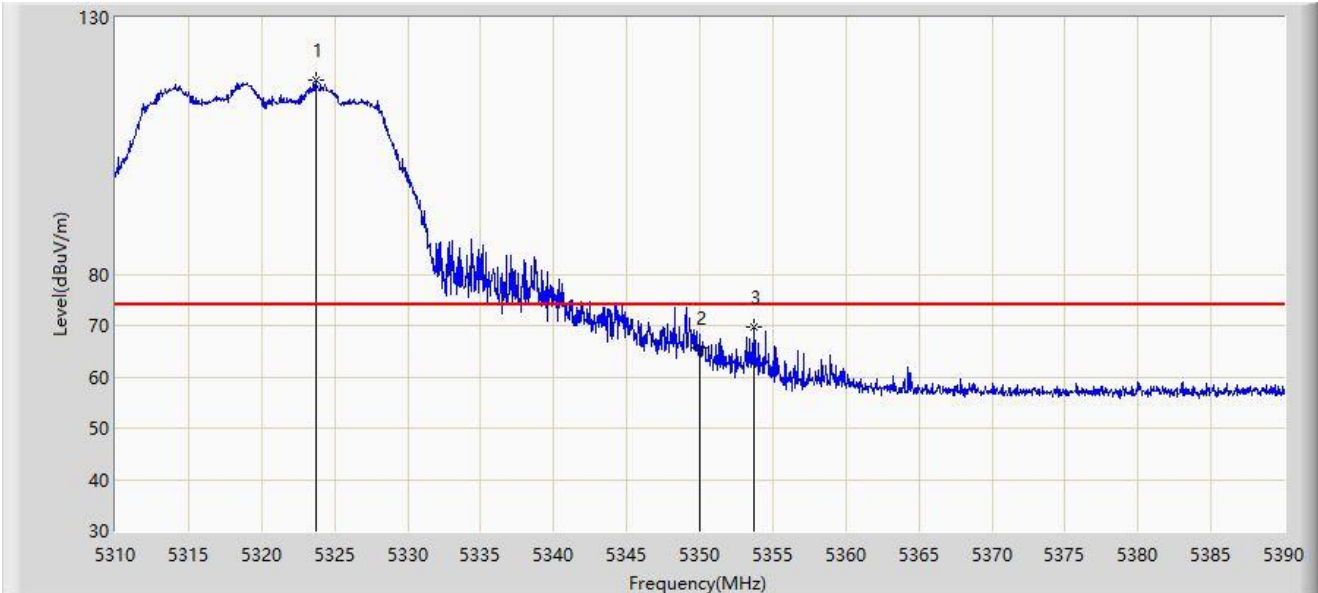

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5323.720	117.820	114.819	N/A	N/A	3.002	PK
2		5350.000	65.616	62.796	-8.384	74.000	2.820	PK
3	*	5353.680	69.611	66.817	-4.389	74.000	2.793	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5318.960	110.326	107.317	N/A	N/A	3.009	AV
2	*	5350.000	51.114	48.294	-2.886	54.000	2.820	AV
3		5350.160	50.990	48.173	-3.010	54.000	2.817	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-04
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

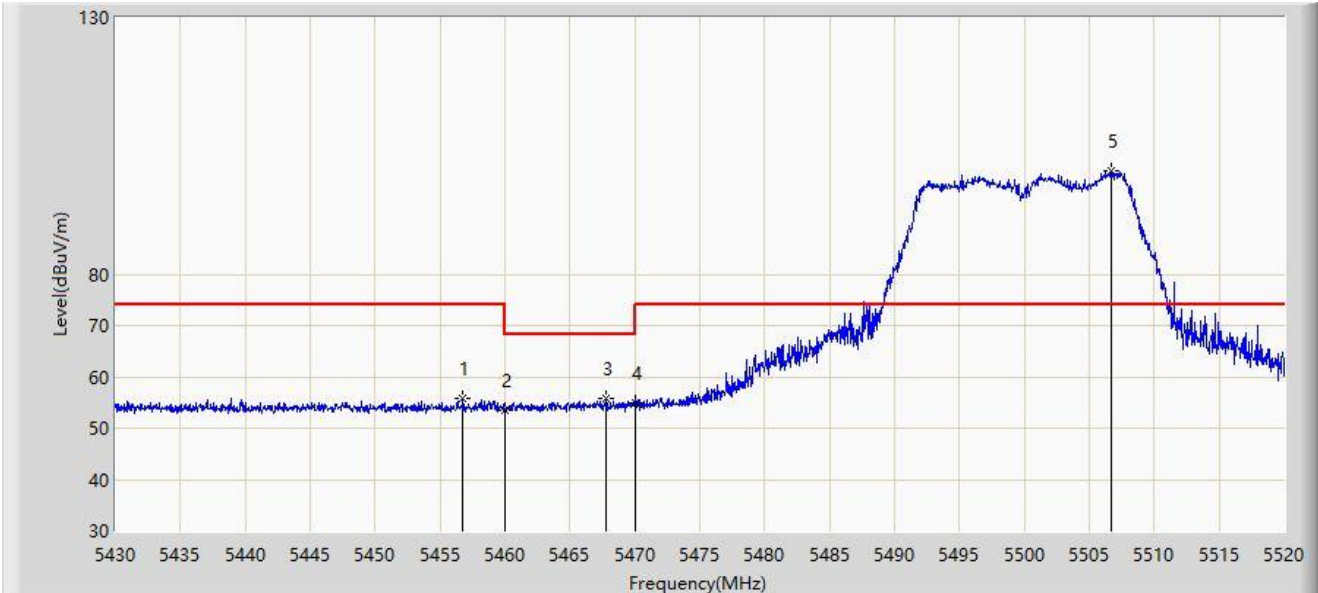


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5456.775	55.926	52.838	-18.074	74.000	3.088	PK
2		5460.000	53.527	50.378	-20.473	74.000	3.149	PK
3	*	5467.800	55.942	52.642	-12.258	68.200	3.300	PK
4		5470.000	54.795	51.453	-13.405	68.200	3.341	PK
5		5506.680	100.094	96.961	N/A	N/A	3.133	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-04
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

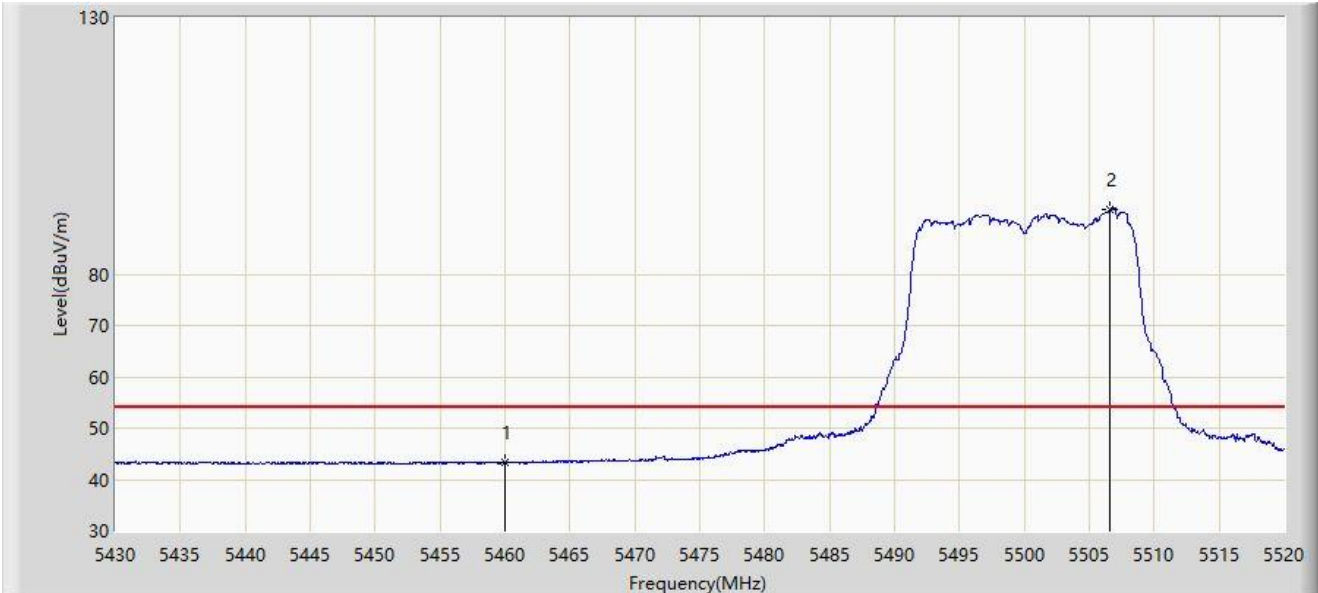


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5460.000	43.236	40.087	-10.764	54.000	3.149	AV
2		5506.635	92.581	89.447	N/A	N/A	3.133	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-04
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

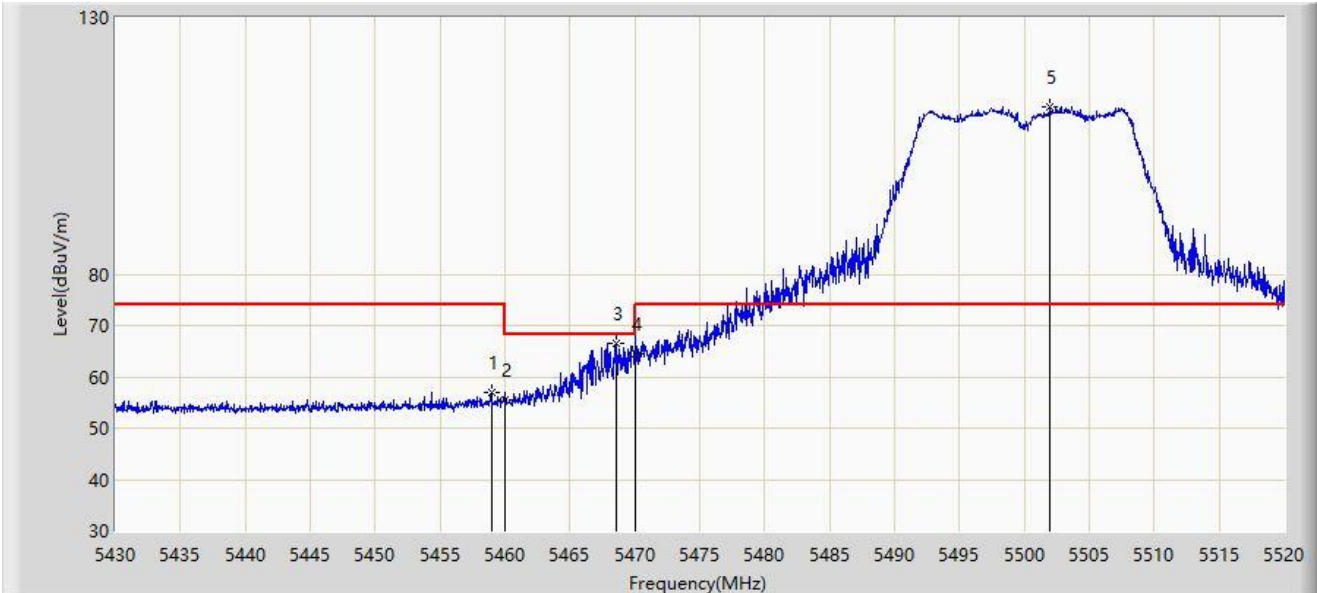


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5458.935	57.003	53.874	-16.997	74.000	3.128	PK
2		5460.000	55.404	52.255	-18.596	74.000	3.149	PK
3	*	5468.565	66.619	63.305	-1.581	68.200	3.314	PK
4		5470.000	64.575	61.233	-3.625	68.200	3.341	PK
5		5502.000	112.614	109.442	N/A	N/A	3.172	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-04
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

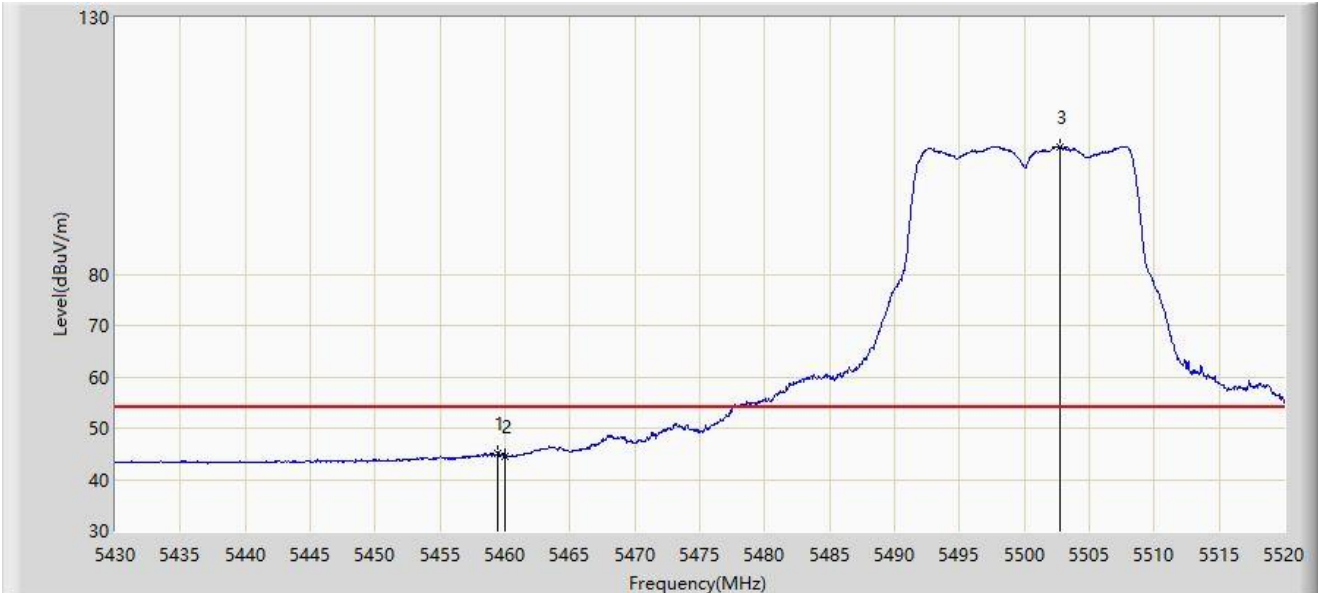

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5459.475	45.143	42.004	-8.857	54.000	3.139	AV
2		5460.000	44.587	41.438	-9.413	54.000	3.149	AV
3		5502.720	104.773	101.606	N/A	N/A	3.166	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2023-12-04
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5700MHz	

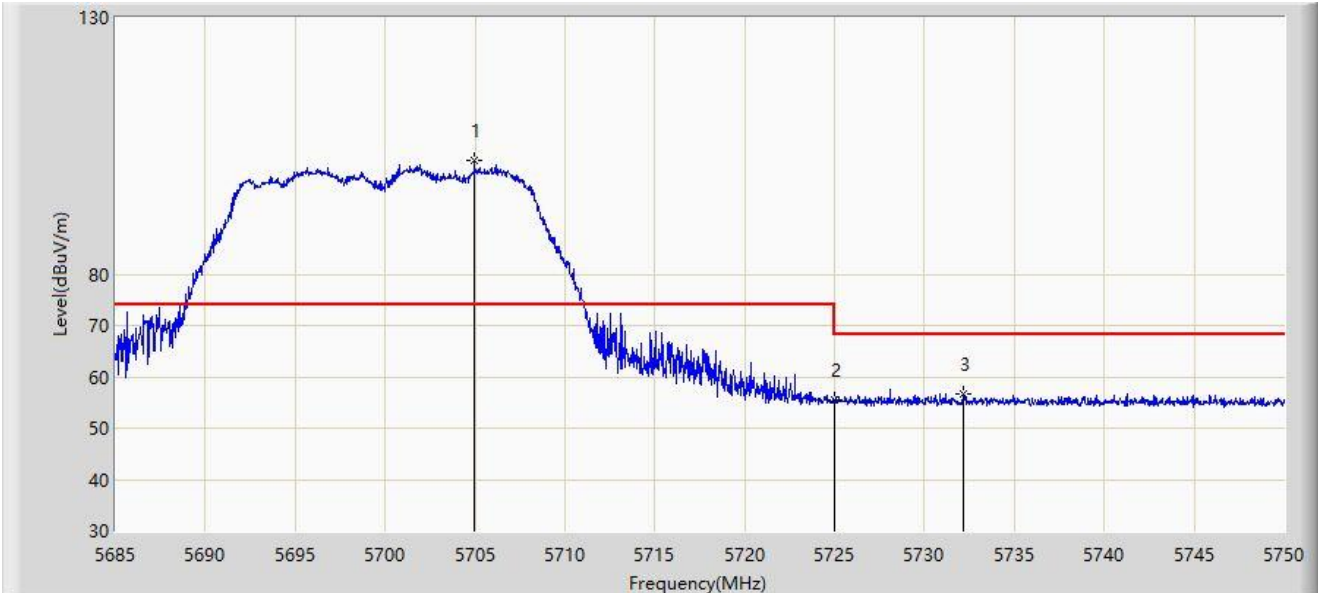


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5704.955	102.050	97.538	N/A	N/A	4.511	PK
2		5725.000	55.440	50.737	-12.760	68.200	4.703	PK
3	*	5732.158	56.592	51.986	-11.608	68.200	4.606	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-04
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5700MHz	

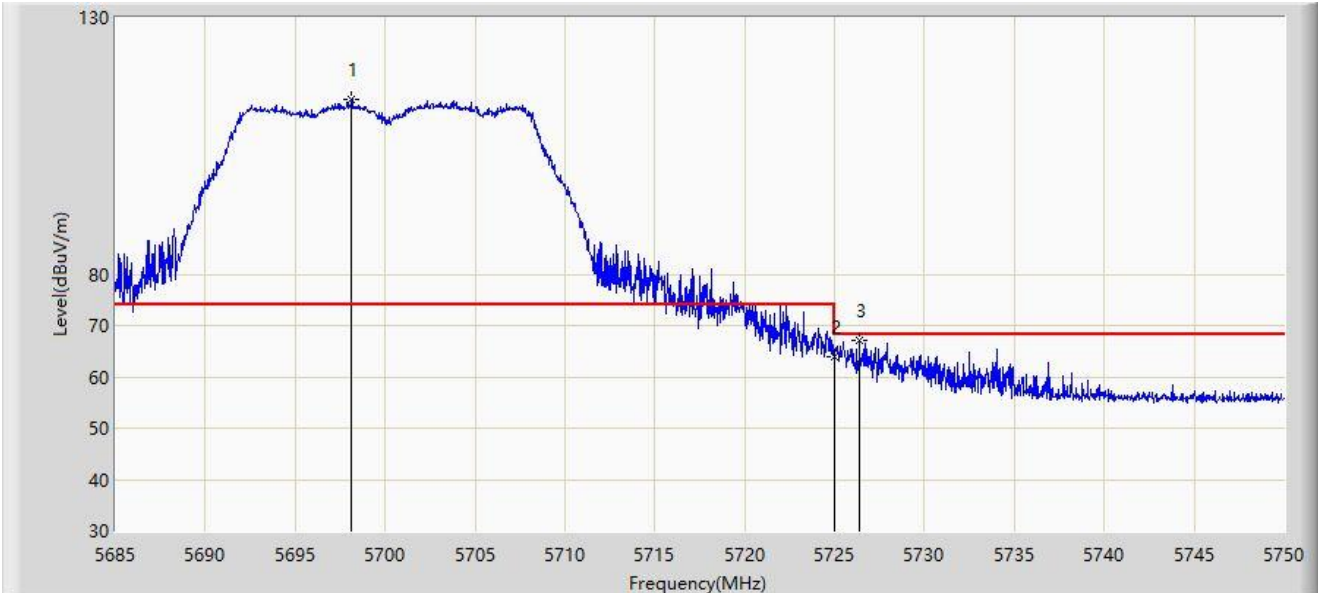


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5698.130	114.106	109.698	N/A	N/A	4.408	PK
2		5725.000	63.807	59.104	-4.393	68.200	4.703	PK
3	*	5726.373	66.959	62.251	-1.241	68.200	4.708	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5745MHz	

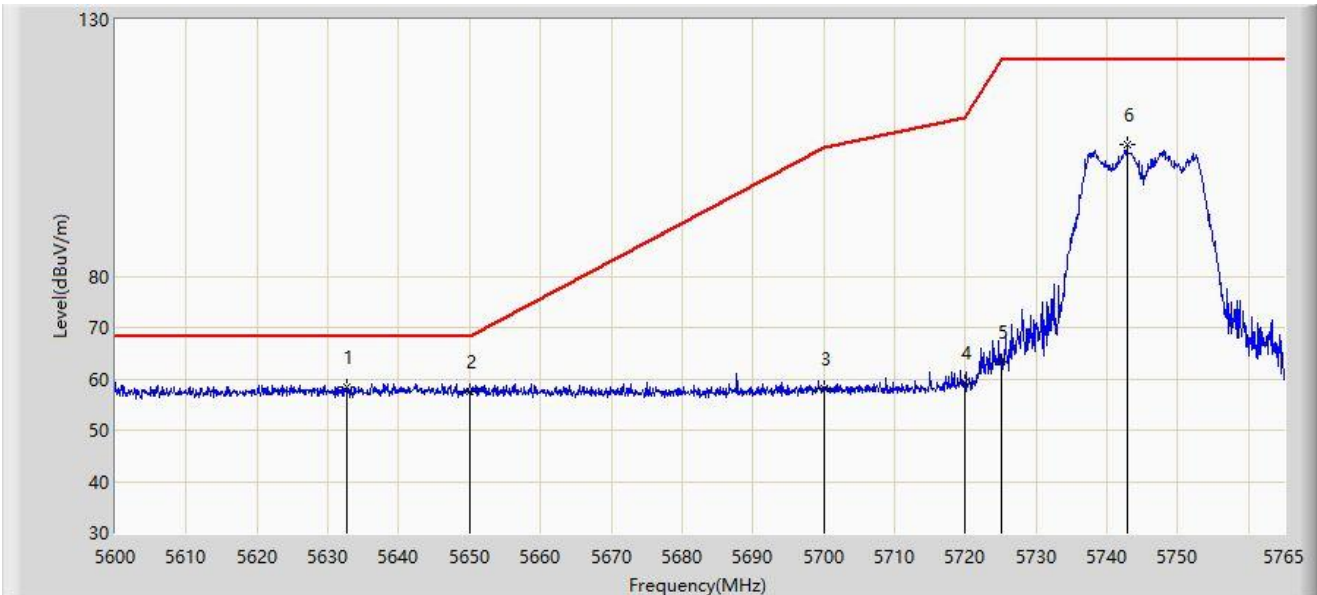


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5632.752	58.474	54.412	-9.726	68.200	4.061	PK
2		5650.000	57.637	53.514	-10.563	68.200	4.122	PK
3		5700.000	58.151	53.714	-47.049	105.200	4.437	PK
4		5720.000	59.239	54.575	-51.561	110.800	4.663	PK
5		5725.000	63.446	58.743	-58.754	122.200	4.703	PK
6		5742.808	105.670	101.252	N/A	N/A	4.418	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5745MHz	

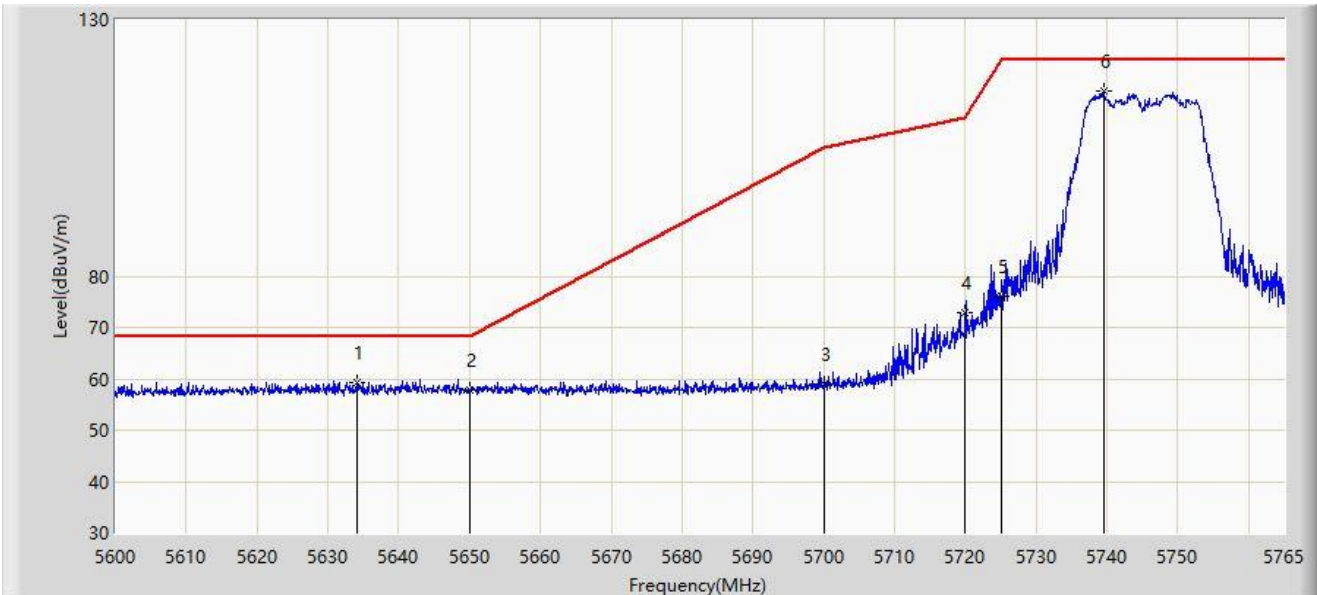


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5634.155	59.390	55.311	-8.810	68.200	4.079	PK
2		5650.000	57.796	53.673	-10.404	68.200	4.122	PK
3		5700.000	59.101	54.664	-46.099	105.200	4.437	PK
4		5720.000	72.769	68.105	-38.031	110.800	4.663	PK
5		5725.000	76.226	71.523	-45.974	122.200	4.703	PK
6		5739.507	115.959	111.483	N/A	N/A	4.476	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5825MHz	

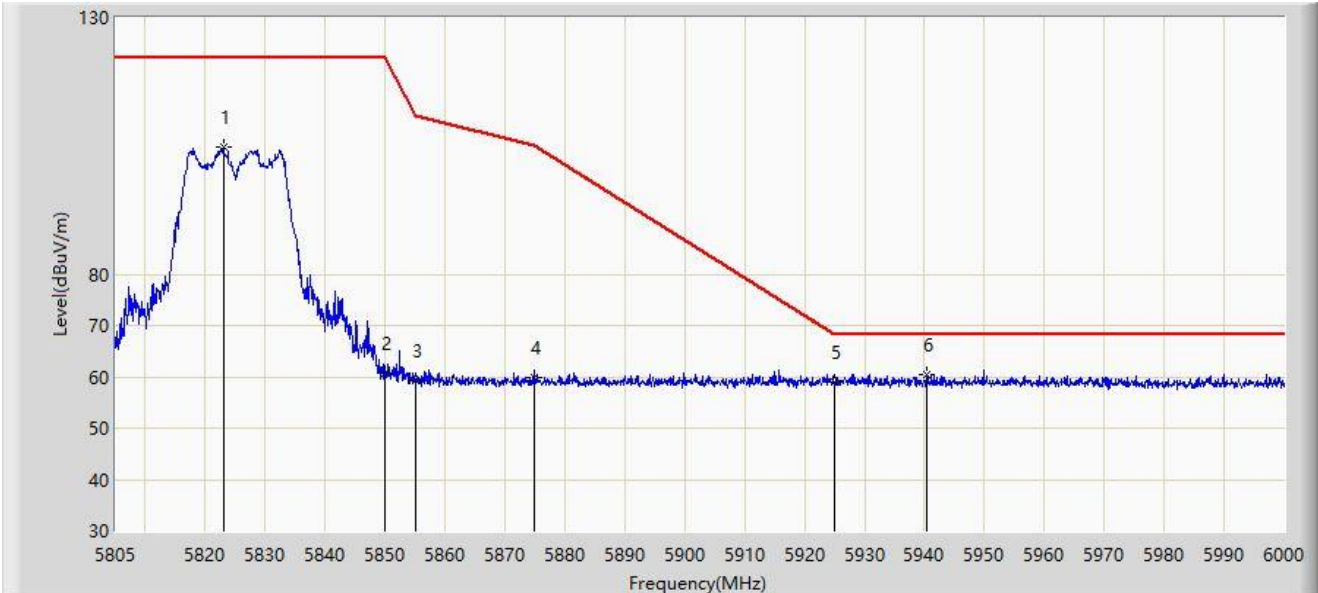


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5823.038	104.842	99.954	N/A	N/A	4.888	PK
2		5850.000	60.760	55.777	-61.440	122.200	4.984	PK
3		5855.000	59.343	54.305	-51.457	110.800	5.038	PK
4		5875.000	59.733	54.602	-45.467	105.200	5.131	PK
5		5925.000	58.842	53.607	-9.358	68.200	5.236	PK
6	*	5940.428	60.485	55.196	-7.715	68.200	5.289	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5825MHz	

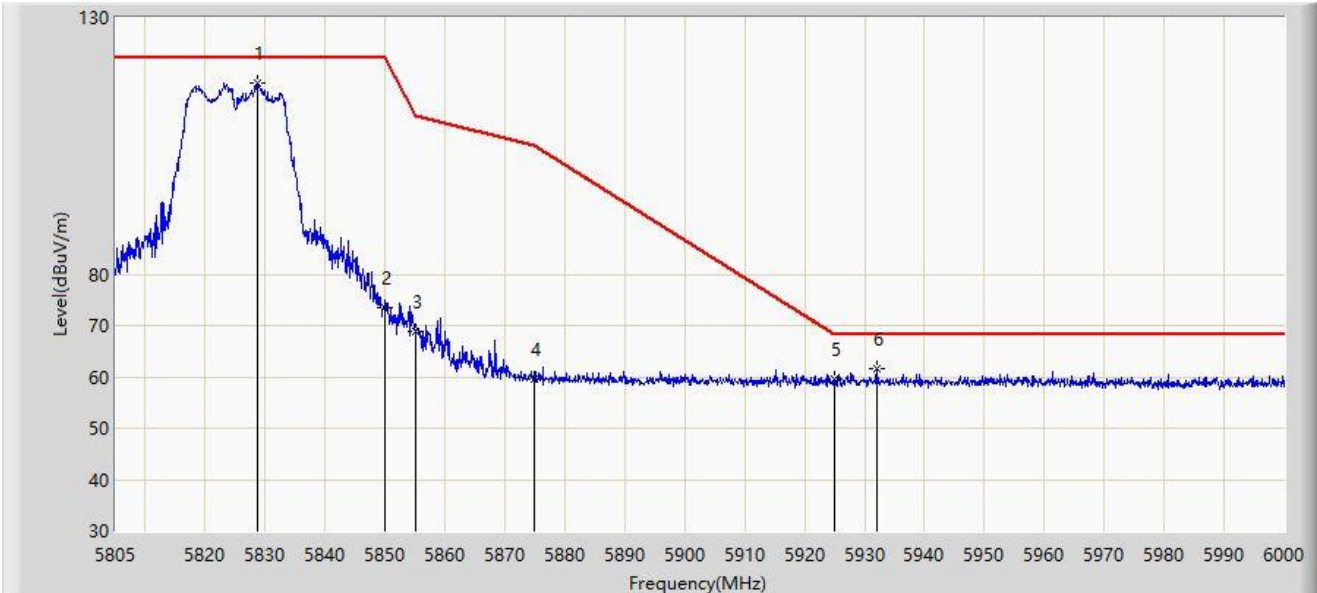


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5828.692	117.381	112.545	N/A	N/A	4.836	PK
2		5850.000	73.530	68.547	-48.670	122.200	4.984	PK
3		5855.000	68.962	63.924	-41.838	110.800	5.038	PK
4		5875.000	59.539	54.408	-45.661	105.200	5.131	PK
5		5925.000	59.509	54.274	-8.691	68.200	5.236	PK
6	*	5932.042	61.612	56.342	-6.588	68.200	5.269	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

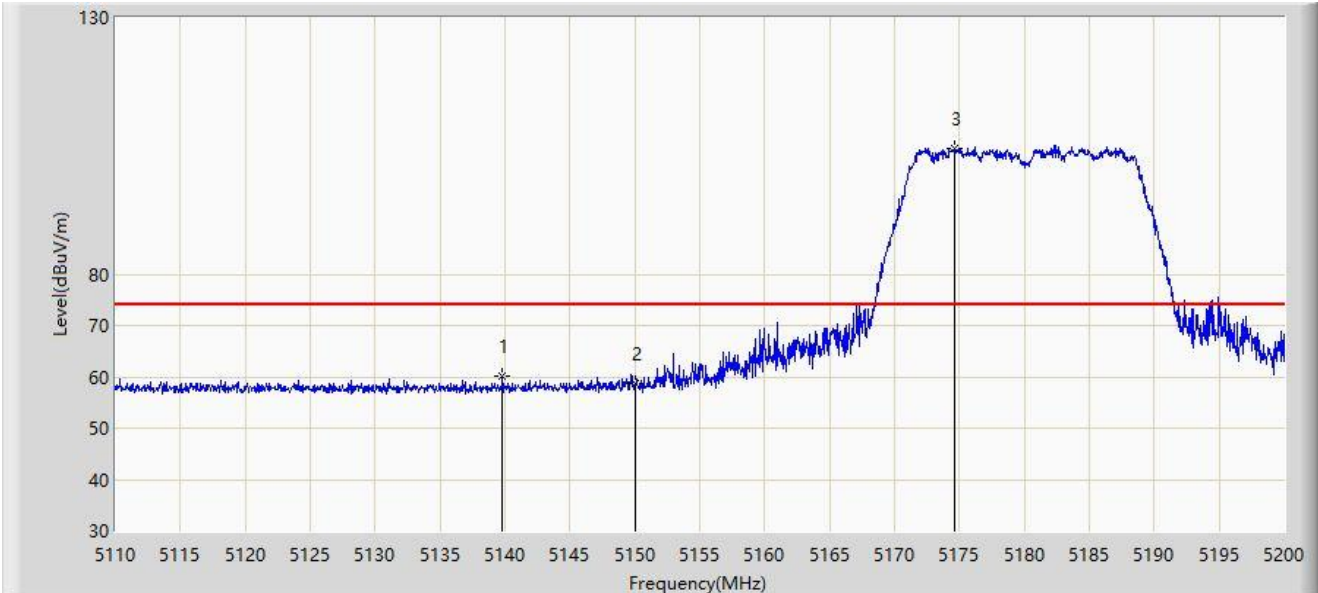


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5139.790	60.198	56.826	-13.802	74.000	3.371	PK
2		5150.000	58.653	55.171	-15.347	74.000	3.482	PK
3		5174.620	104.350	100.973	N/A	N/A	3.377	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

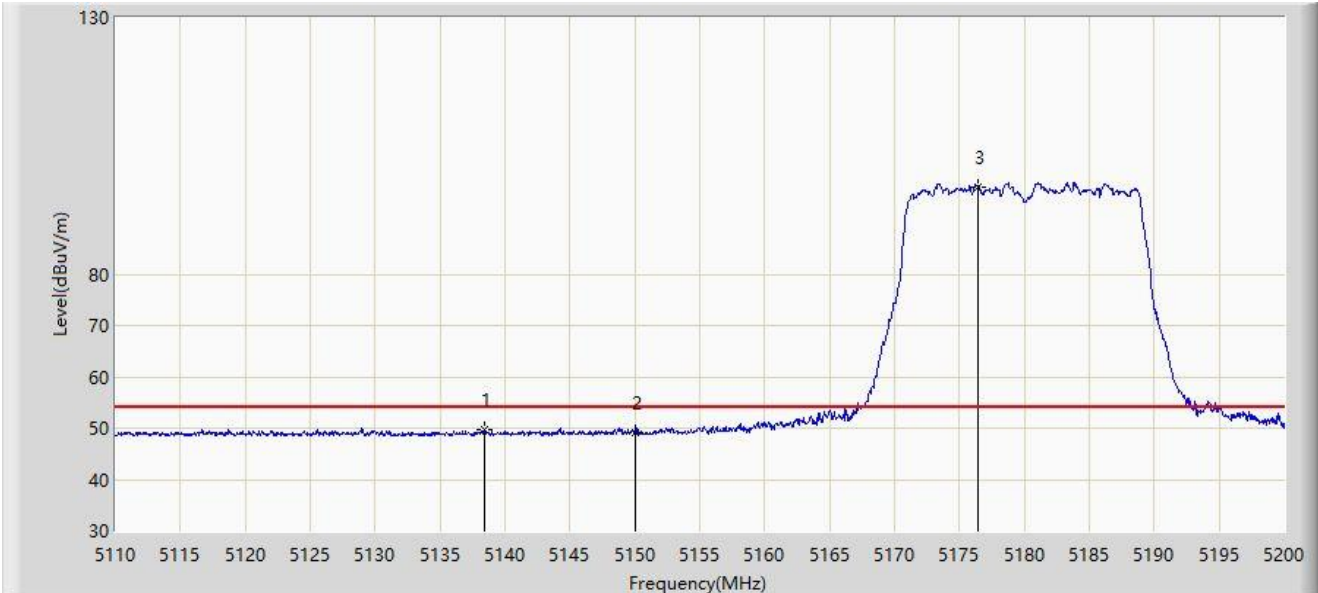

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5138.395	49.673	46.319	-4.327	54.000	3.354	AV
2		5150.000	49.034	45.552	-4.966	54.000	3.482	AV
3		5176.420	96.980	93.639	N/A	N/A	3.341	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

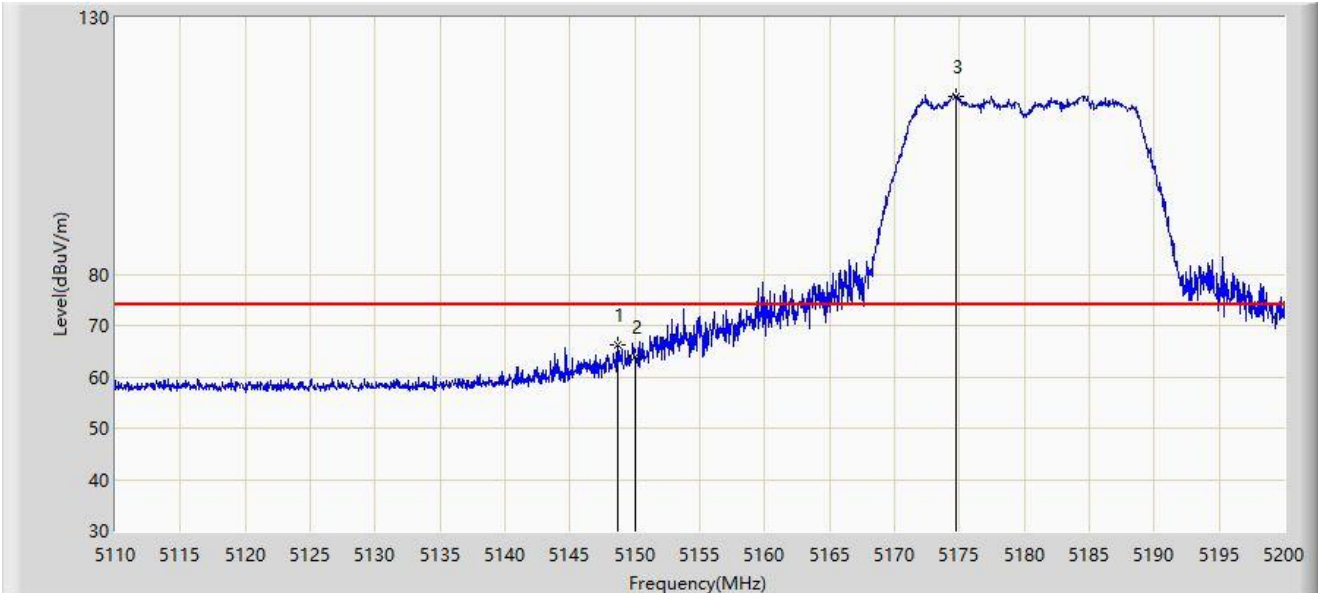


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5148.655	66.104	62.626	-7.896	74.000	3.478	PK
2		5150.000	63.931	60.449	-10.069	74.000	3.482	PK
3		5174.755	114.658	111.283	N/A	N/A	3.375	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

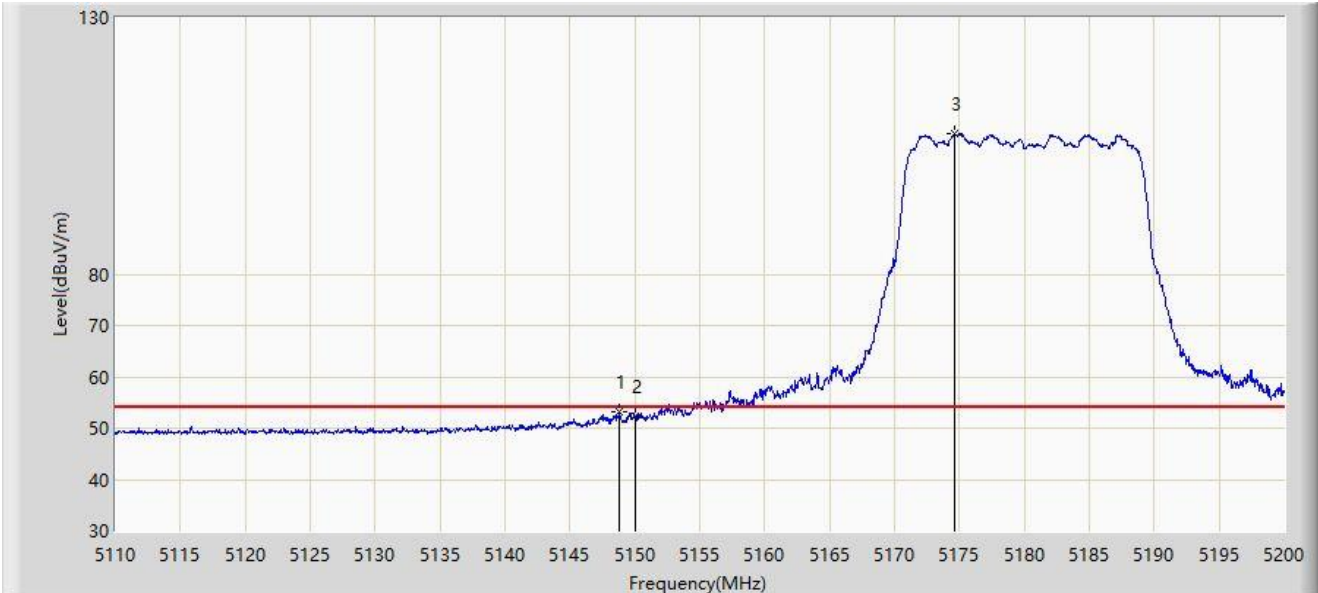


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.790	53.164	49.686	-0.836	54.000	3.478	AV
2		5150.000	52.355	48.873	-1.645	54.000	3.482	AV
3		5174.665	107.490	104.114	N/A	N/A	3.376	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

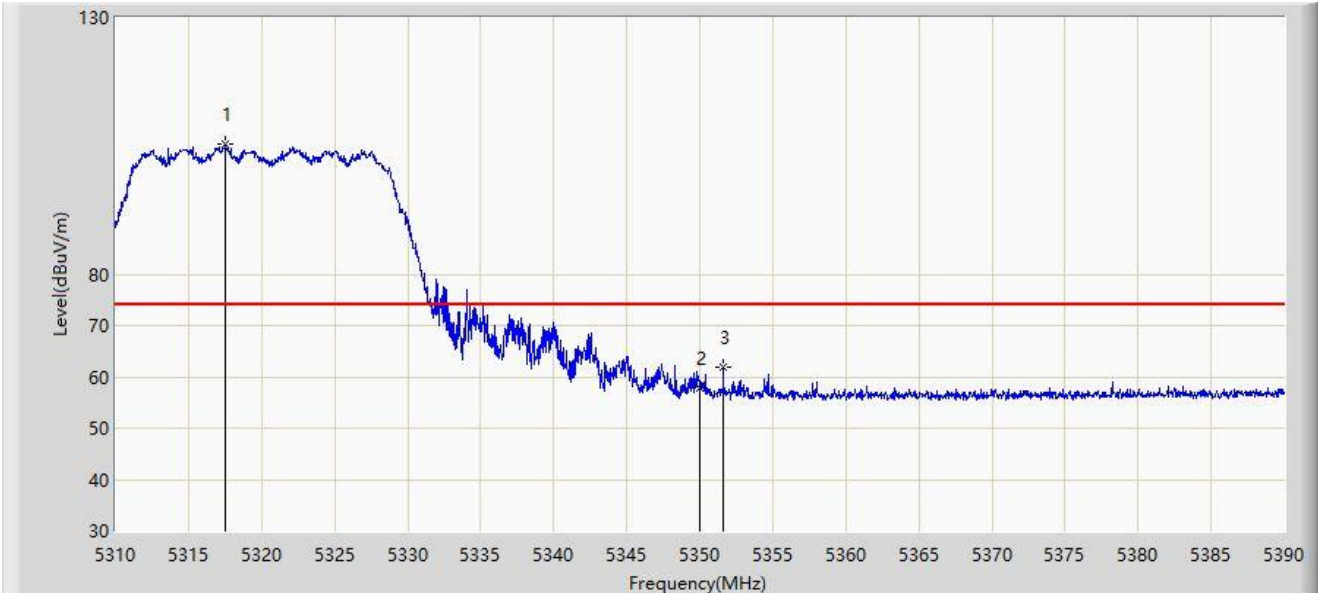


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5317.560	105.289	102.286	N/A	N/A	3.003	PK
2		5350.000	57.761	54.941	-16.239	74.000	2.820	PK
3	*	5351.600	61.984	59.191	-12.016	74.000	2.793	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

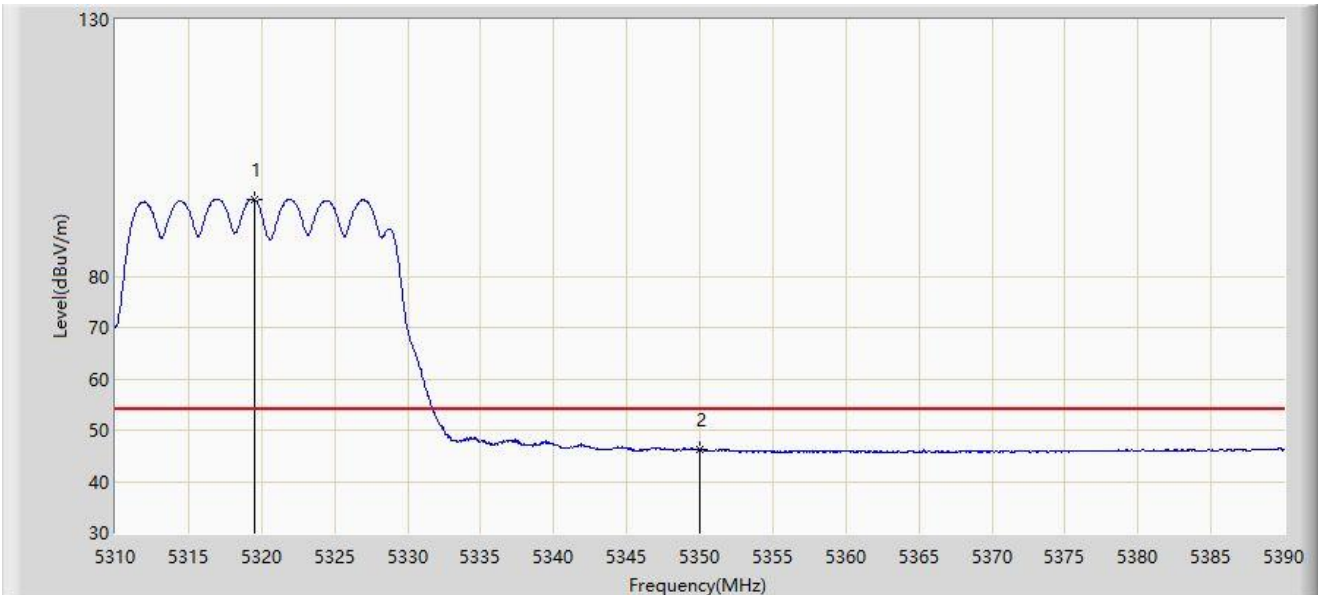


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5319.520	94.981	91.973	N/A	N/A	3.008	AV
2	*	5350.000	46.216	43.396	-7.784	54.000	2.820	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

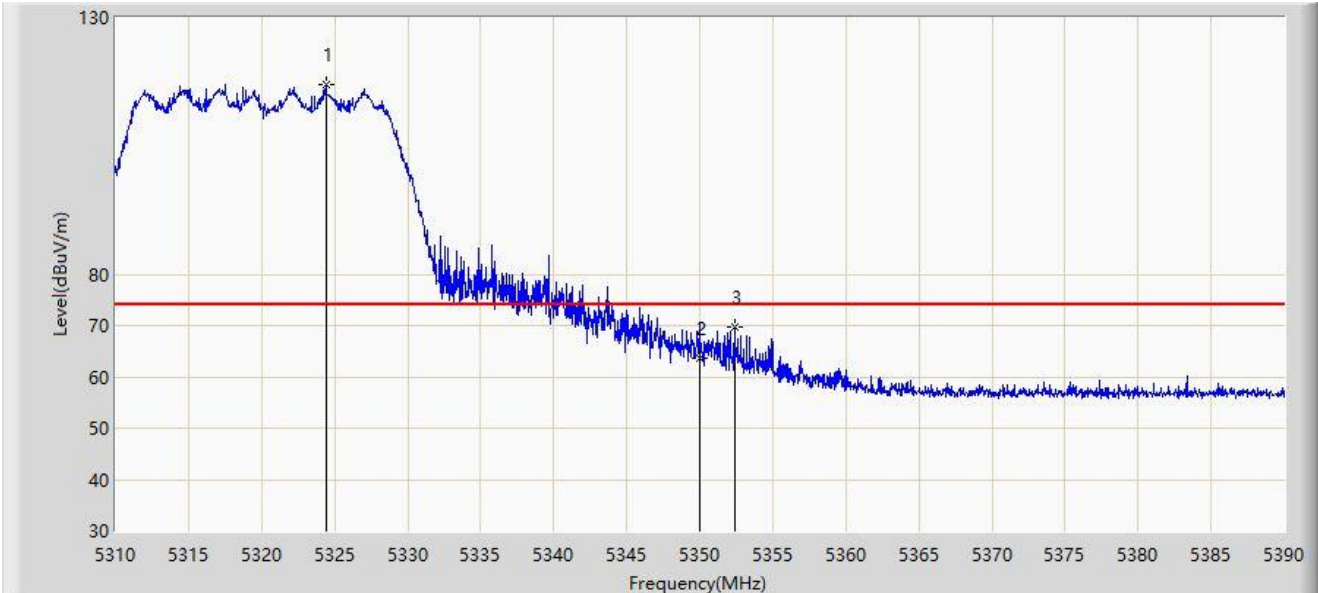


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5324.400	116.821	113.821	N/A	N/A	3.000	PK
2		5350.000	63.708	60.888	-10.292	74.000	2.820	PK
3	*	5352.360	69.658	66.870	-4.342	74.000	2.787	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

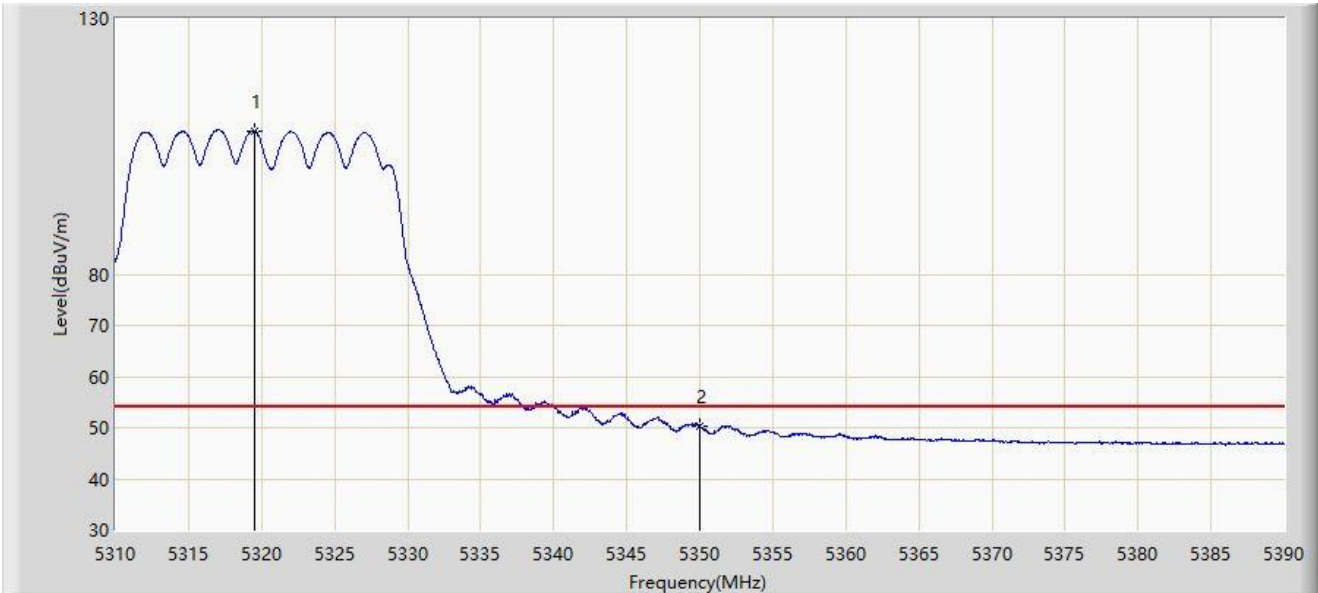


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5319.520	108.114	105.106	N/A	N/A	3.008	AV
2	*	5350.000	50.414	47.594	-3.586	54.000	2.820	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-04
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

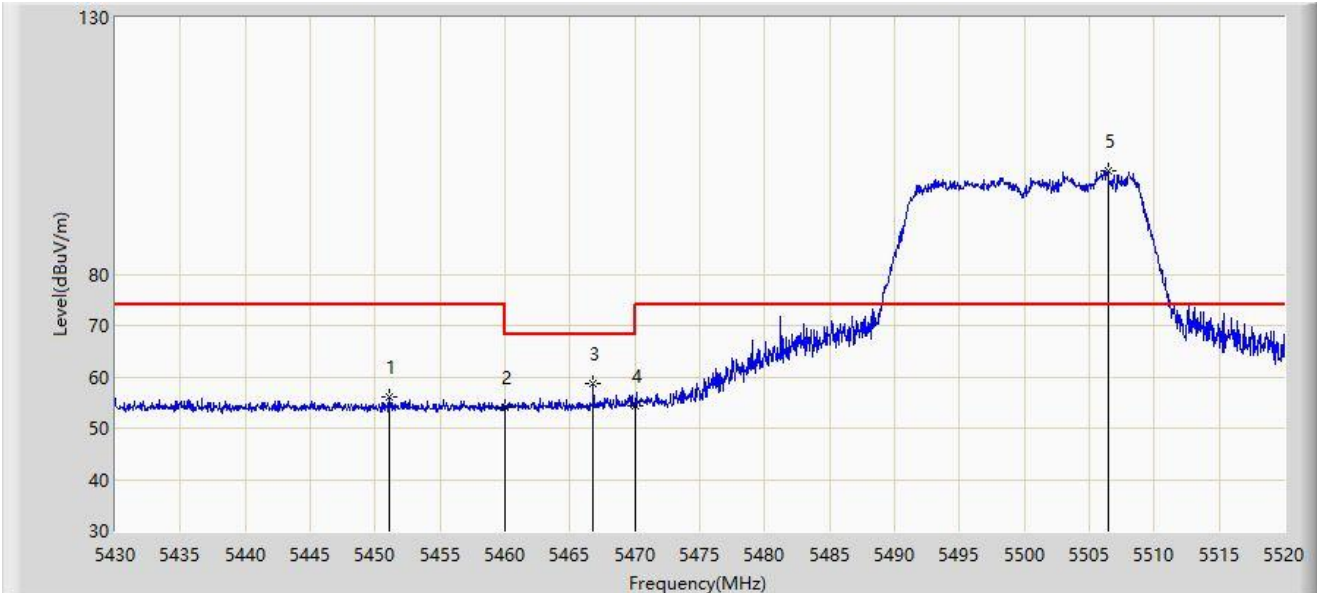


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5451.060	56.000	52.933	-18.000	74.000	3.066	PK
2		5460.000	54.173	51.024	-19.827	74.000	3.149	PK
3	*	5466.810	58.636	55.356	-9.564	68.200	3.280	PK
4		5470.000	54.209	50.867	-13.991	68.200	3.341	PK
5		5506.455	100.211	97.075	N/A	N/A	3.135	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-04
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

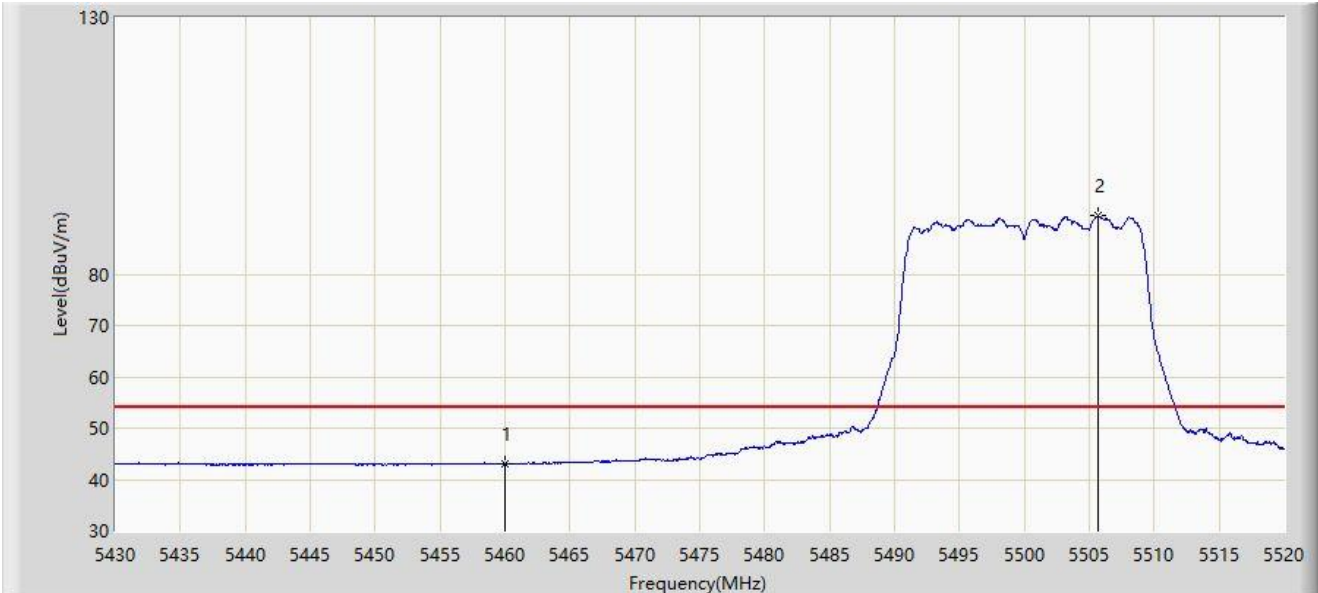

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5460.000	43.024	39.875	-10.976	54.000	3.149	AV
2		5505.690	91.363	88.220	N/A	N/A	3.143	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2023-12-04
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

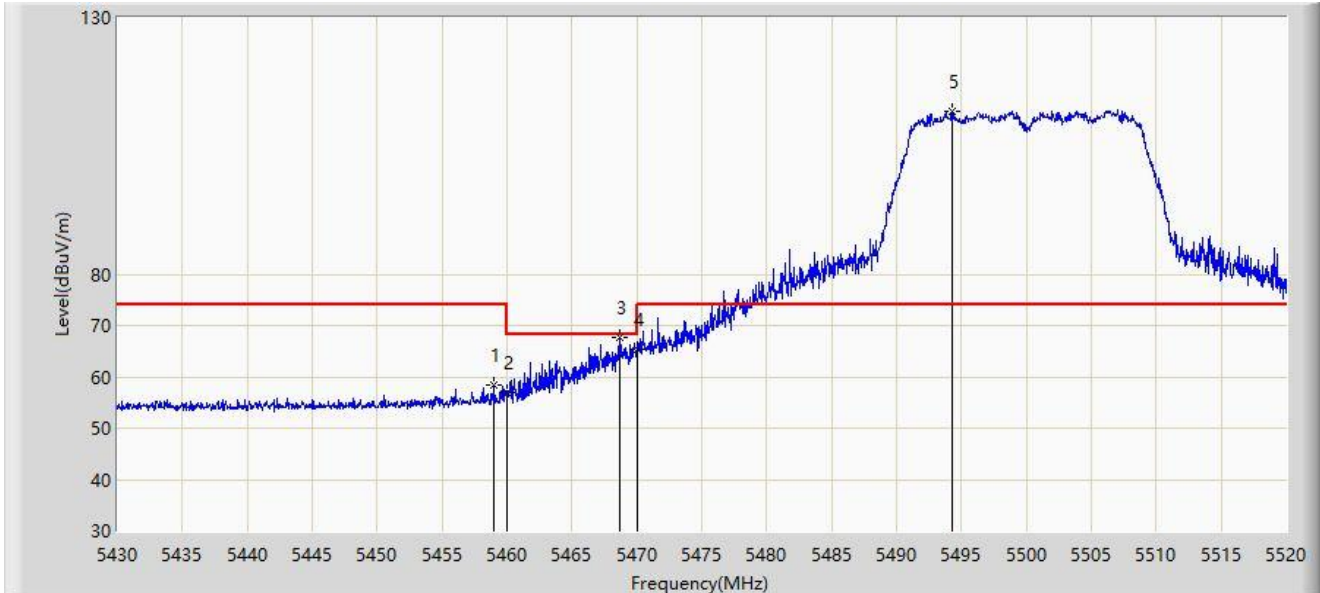

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.980	58.275	55.146	-15.725	74.000	3.129	PK
2		5460.000	56.863	53.714	-17.137	74.000	3.149	PK
3	*	5468.655	67.587	64.271	-0.613	68.200	3.316	PK
4		5470.000	65.386	62.044	-2.814	68.200	3.341	PK
5		5494.305	111.881	108.655	N/A	N/A	3.225	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-04
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	




No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5459.295	45.126	41.990	-8.874	54.000	3.136	AV
2		5460.000	44.529	41.380	-9.471	54.000	3.149	AV
3		5498.715	104.117	100.922	N/A	N/A	3.196	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-05
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

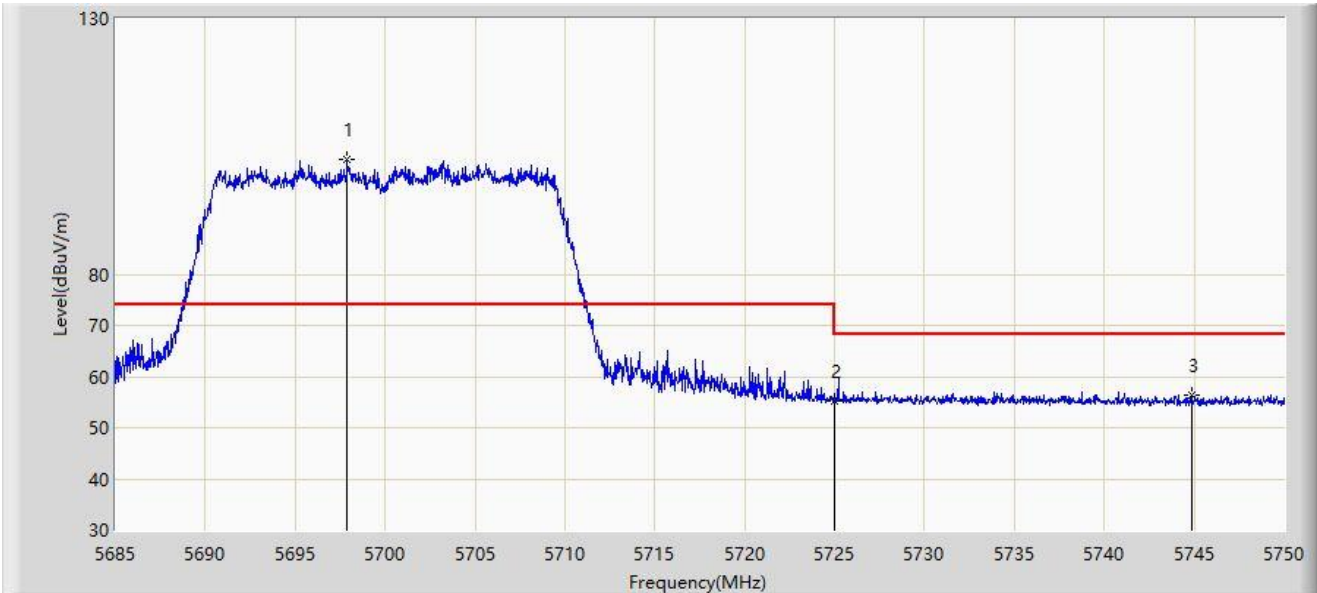


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5697.902	102.520	98.115	N/A	N/A	4.404	PK
2		5725.000	55.190	50.487	-13.010	68.200	4.703	PK
3	*	5744.833	56.426	52.007	-11.774	68.200	4.420	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-04
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

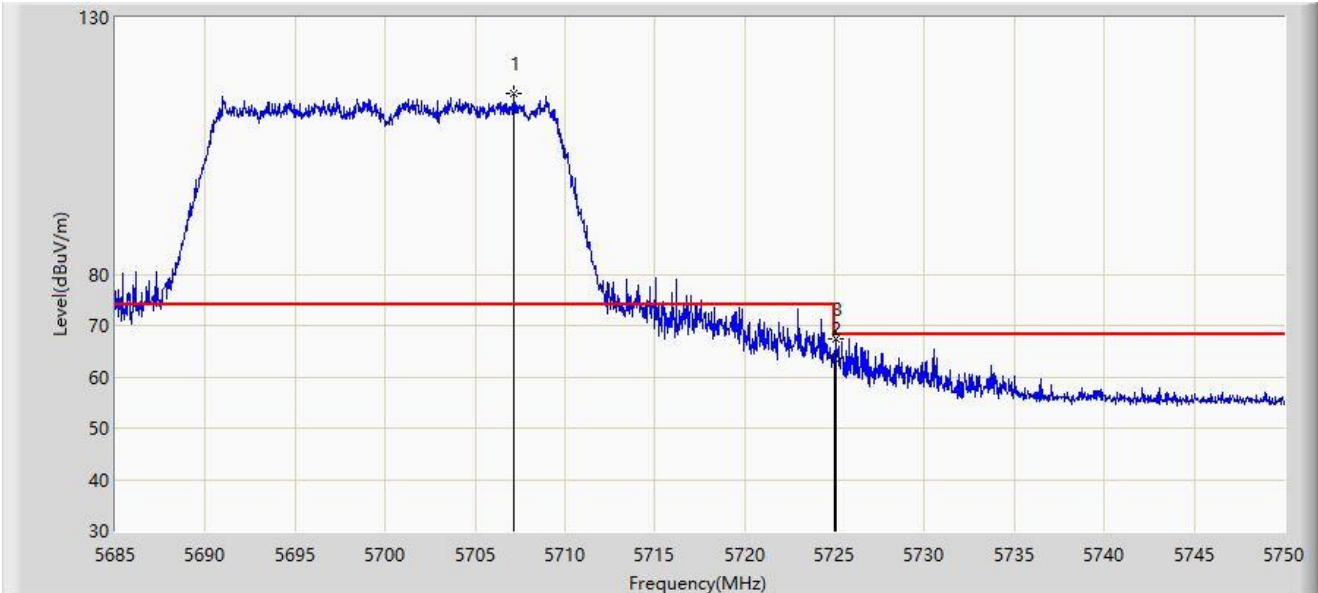


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5707.132	115.157	110.612	N/A	N/A	4.546	PK
2		5725.000	63.706	59.003	-4.494	68.200	4.703	PK
3	*	5725.105	67.525	62.821	-0.675	68.200	4.704	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

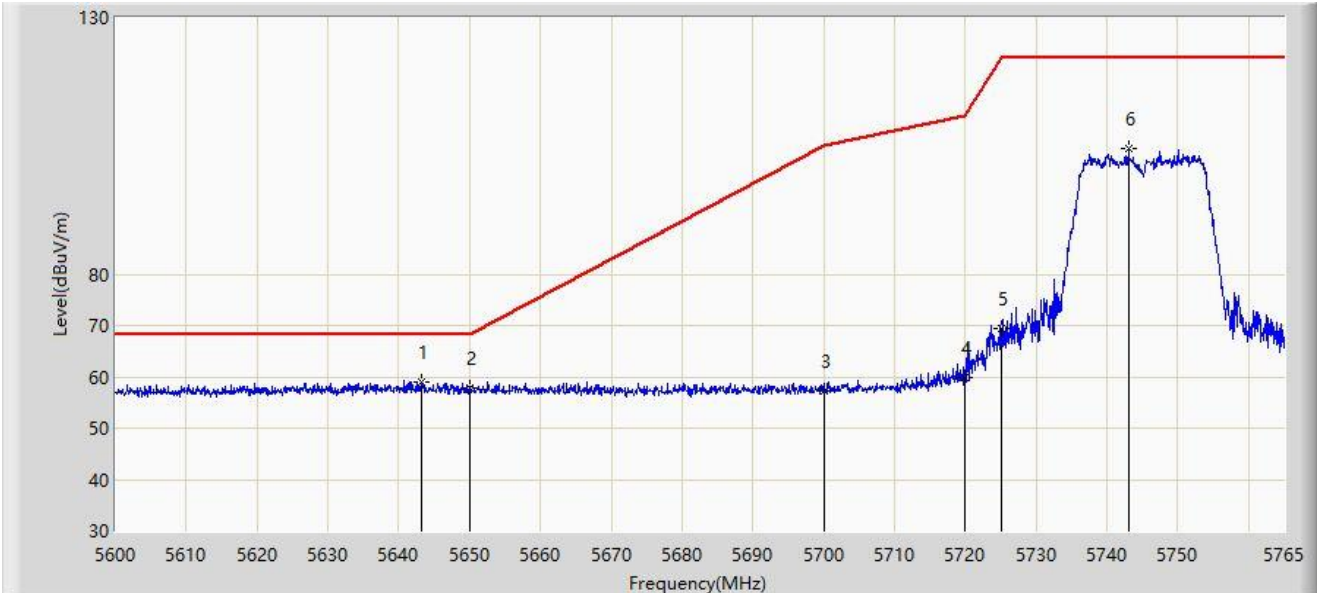


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5643.147	59.072	54.916	-9.128	68.200	4.157	PK
2		5650.000	57.690	53.567	-10.510	68.200	4.122	PK
3		5700.000	57.136	52.699	-48.064	105.200	4.437	PK
4		5720.000	59.851	55.187	-50.949	110.800	4.663	PK
5		5725.000	69.459	64.756	-52.741	122.200	4.703	PK
6		5743.055	104.446	100.032	N/A	N/A	4.414	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

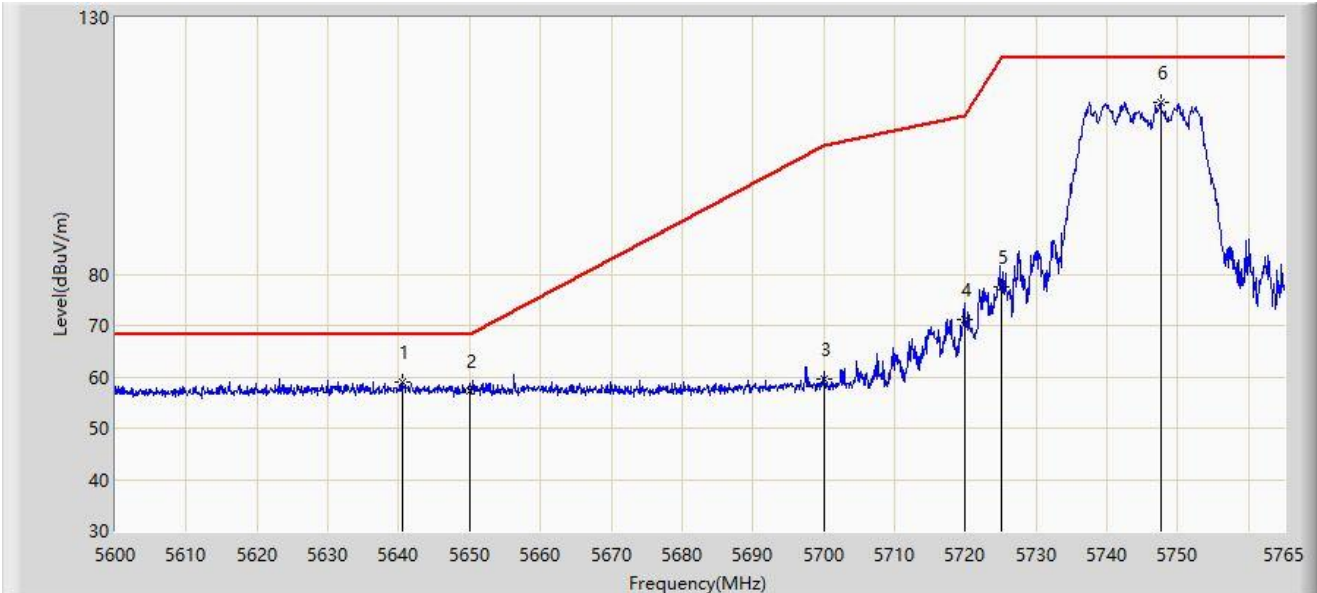


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5640.425	58.911	54.752	-9.289	68.200	4.159	PK
2		5650.000	57.387	53.264	-10.813	68.200	4.122	PK
3		5700.000	59.536	55.099	-45.664	105.200	4.437	PK
4		5720.000	71.105	66.441	-39.695	110.800	4.663	PK
5		5725.000	77.621	72.918	-44.579	122.200	4.703	PK
6		5747.592	113.479	109.027	N/A	N/A	4.451	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

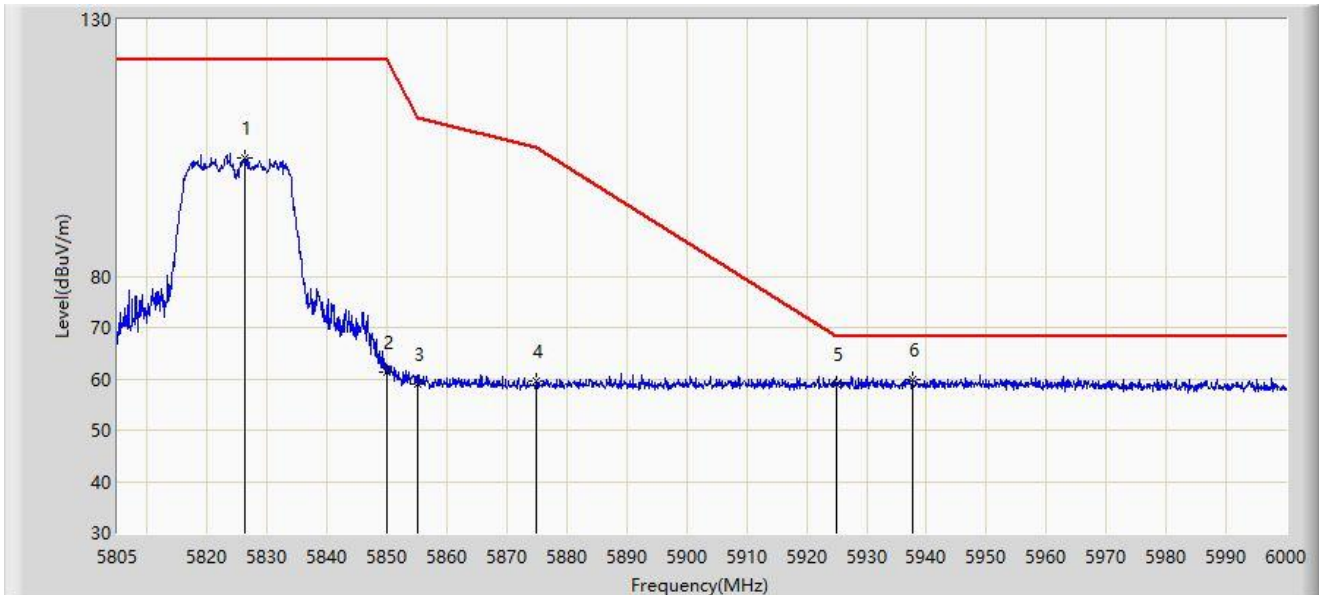


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5826.353	103.026	98.176	N/A	N/A	4.851	PK
2		5850.000	61.423	56.440	-60.777	122.200	4.984	PK
3		5855.000	59.109	54.071	-51.691	110.800	5.038	PK
4		5875.000	59.636	54.505	-45.564	105.200	5.131	PK
5		5925.000	58.932	53.697	-9.268	68.200	5.236	PK
6	*	5937.600	59.961	54.678	-8.239	68.200	5.283	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

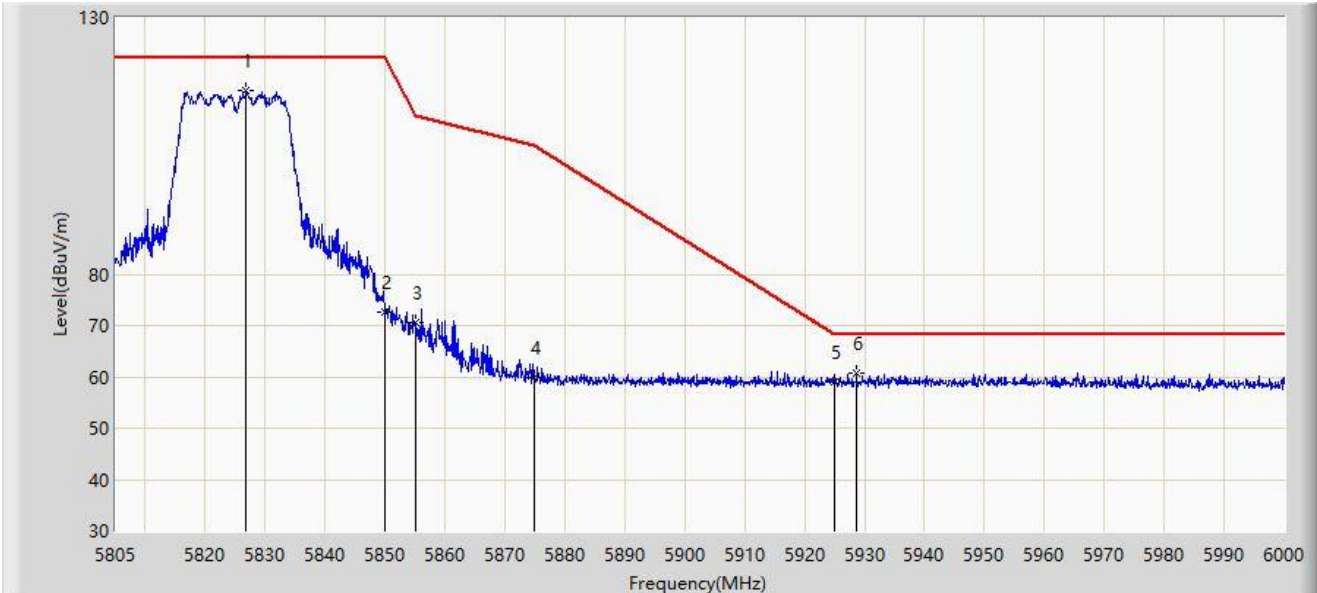

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5826.840	115.732	110.888	N/A	N/A	4.845	PK
2		5850.000	72.465	67.482	-49.735	122.200	4.984	PK
3		5855.000	70.474	65.436	-40.326	110.800	5.038	PK
4		5875.000	59.770	54.639	-45.430	105.200	5.131	PK
5		5925.000	59.022	53.787	-9.178	68.200	5.236	PK
6	*	5928.630	60.656	55.399	-7.544	68.200	5.257	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2023-12-05
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

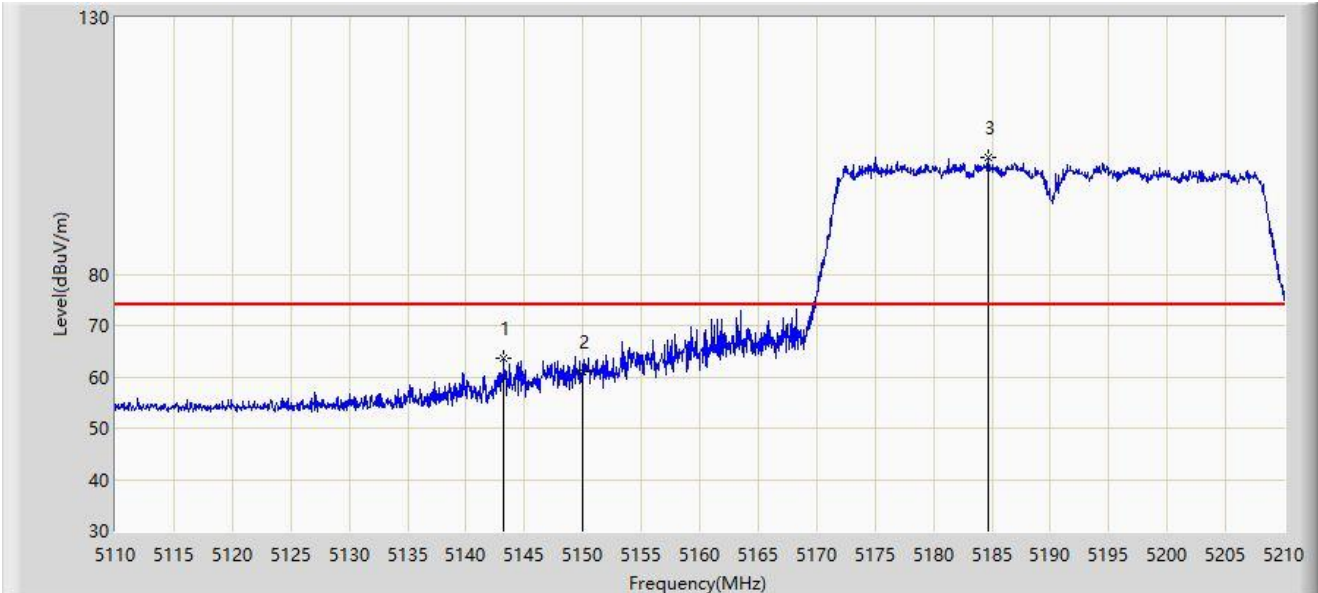


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5143.250	63.724	60.308	-10.276	74.000	3.416	PK
2		5150.000	61.121	57.639	-12.879	74.000	3.482	PK
3		5184.650	102.635	99.466	N/A	N/A	3.169	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-05
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

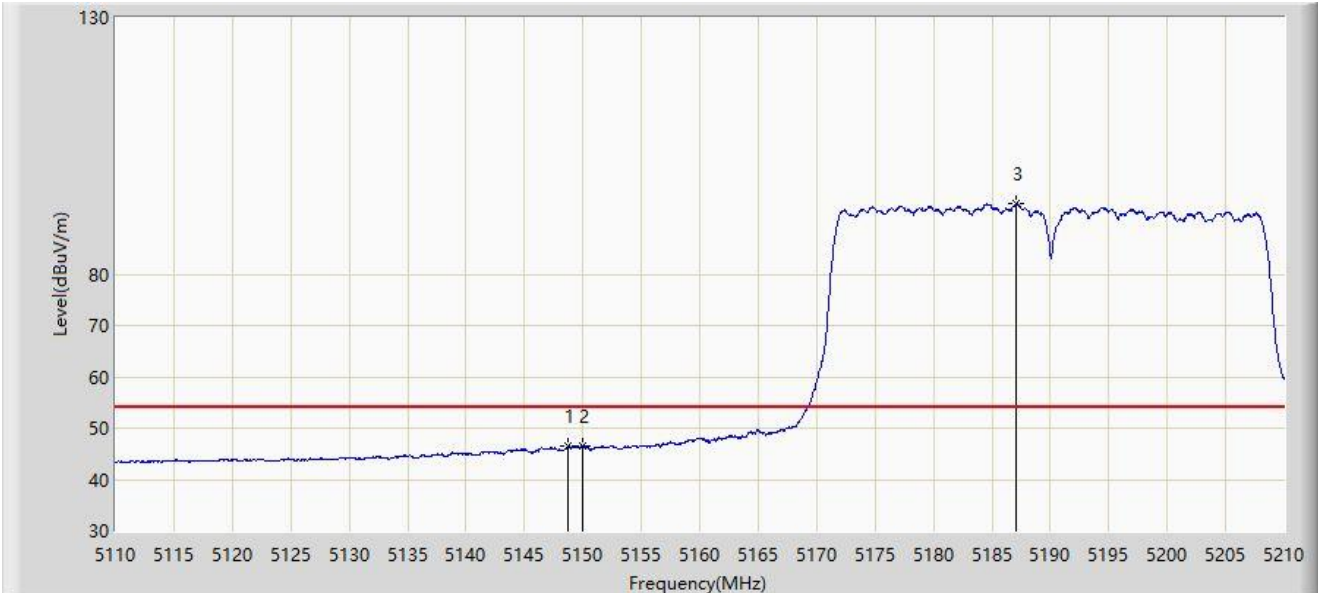

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5148.750	46.410	42.932	-7.590	54.000	3.478	AV
2	*	5150.000	46.522	43.040	-7.478	54.000	3.482	AV
3		5187.100	93.685	90.573	N/A	N/A	3.113	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-05
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	




No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5149.900	73.363	69.881	-0.637	74.000	3.482	PK
2		5150.000	71.748	68.266	-2.252	74.000	3.482	PK
3		5192.500	111.376	108.381	N/A	N/A	2.995	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-05
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

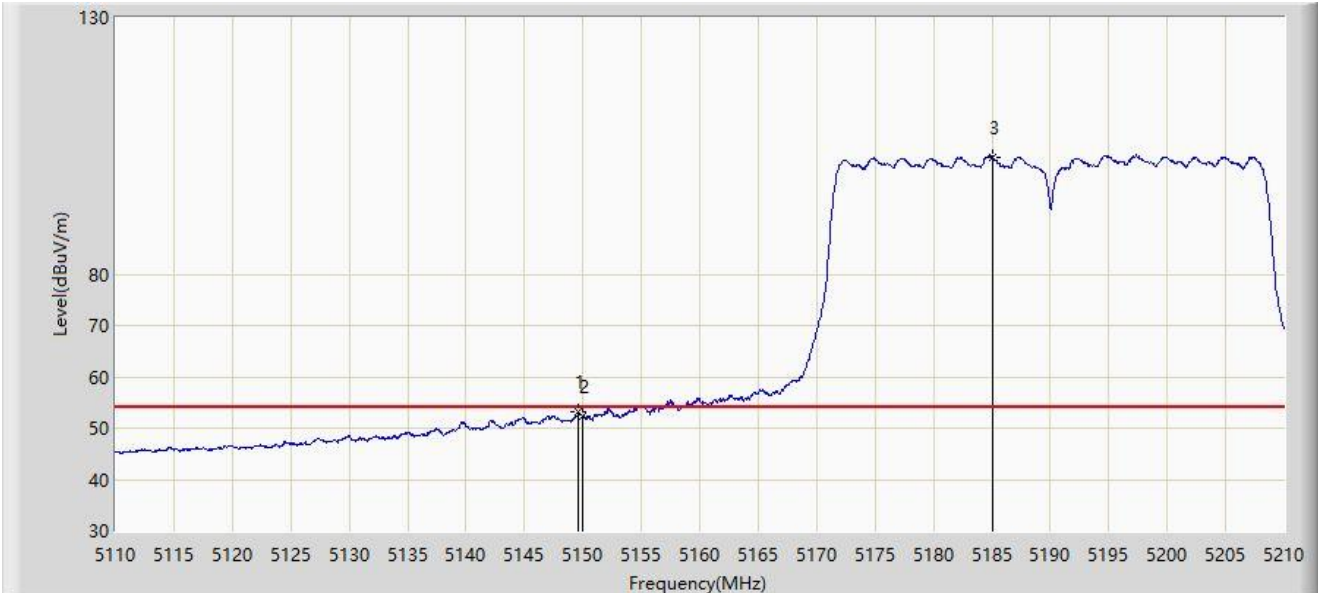


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5149.650	53.203	49.722	-0.797	54.000	3.481	AV
2		5150.000	52.269	48.787	-1.731	54.000	3.482	AV
3		5185.050	102.878	99.718	N/A	N/A	3.160	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

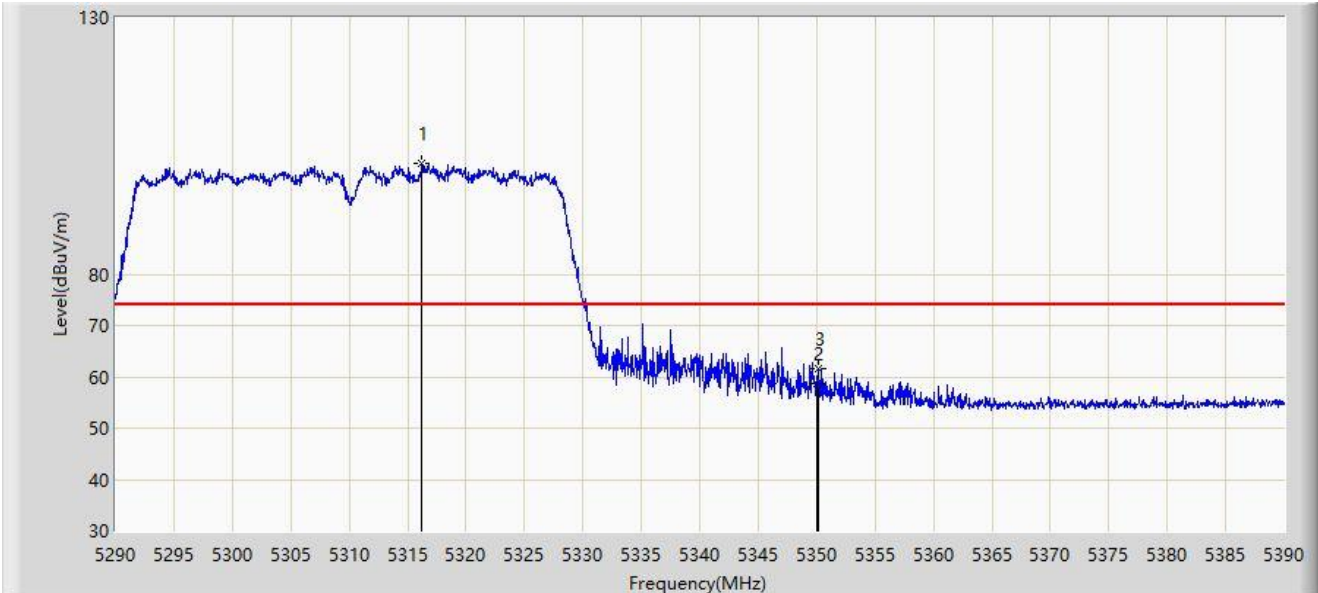


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5316.250	101.489	98.509	N/A	N/A	2.980	PK
2		5350.000	58.835	56.015	-15.165	74.000	2.820	PK
3	*	5350.100	61.736	58.918	-12.264	74.000	2.818	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

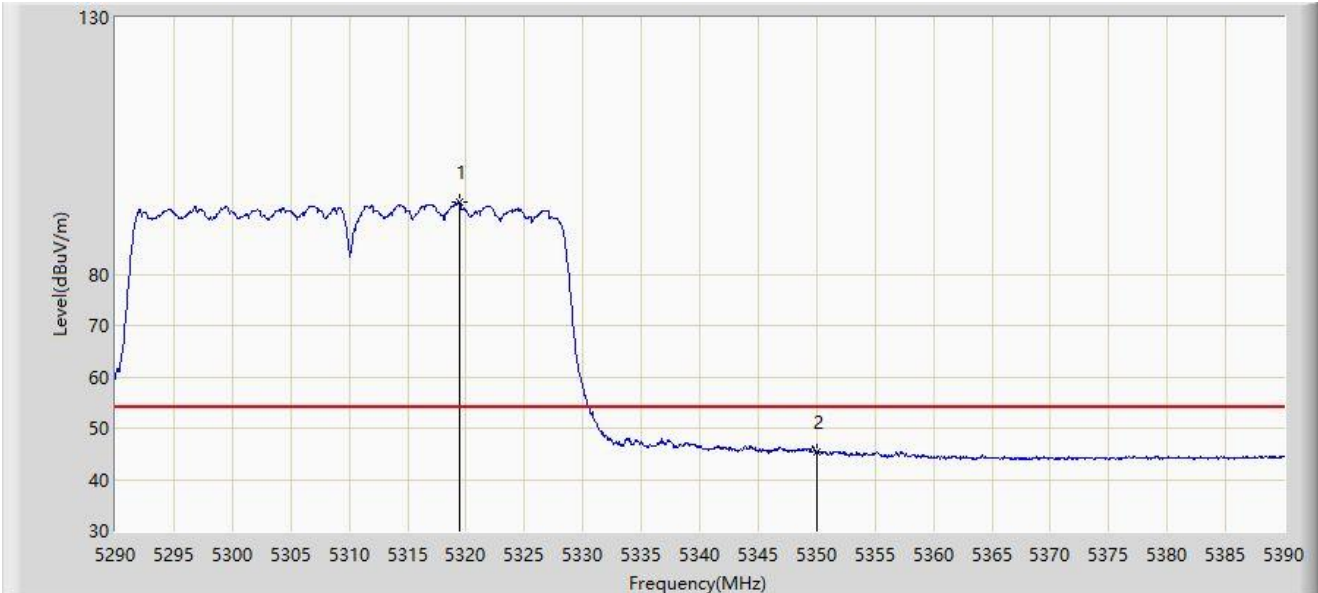


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5319.500	93.946	90.938	N/A	N/A	3.008	AV
2	*	5350.000	45.338	42.518	-8.662	54.000	2.820	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

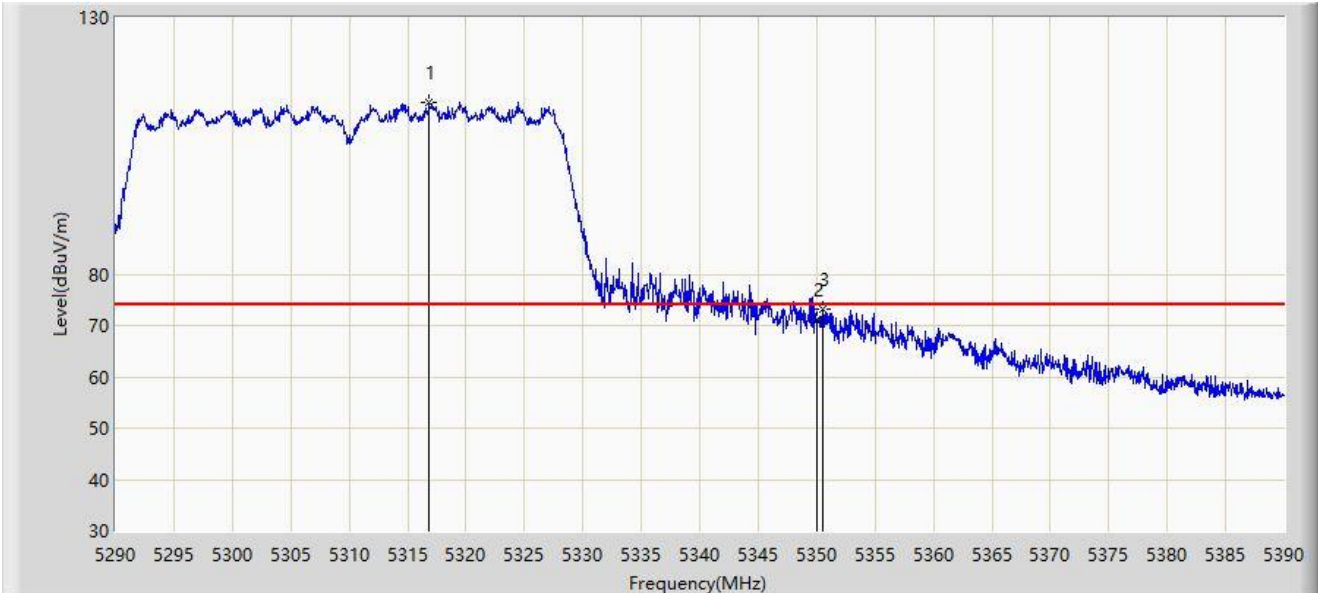


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5316.850	113.395	110.405	N/A	N/A	2.989	PK
2		5350.000	71.289	68.469	-2.711	74.000	2.820	PK
3	*	5350.550	73.232	70.421	-0.768	74.000	2.811	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

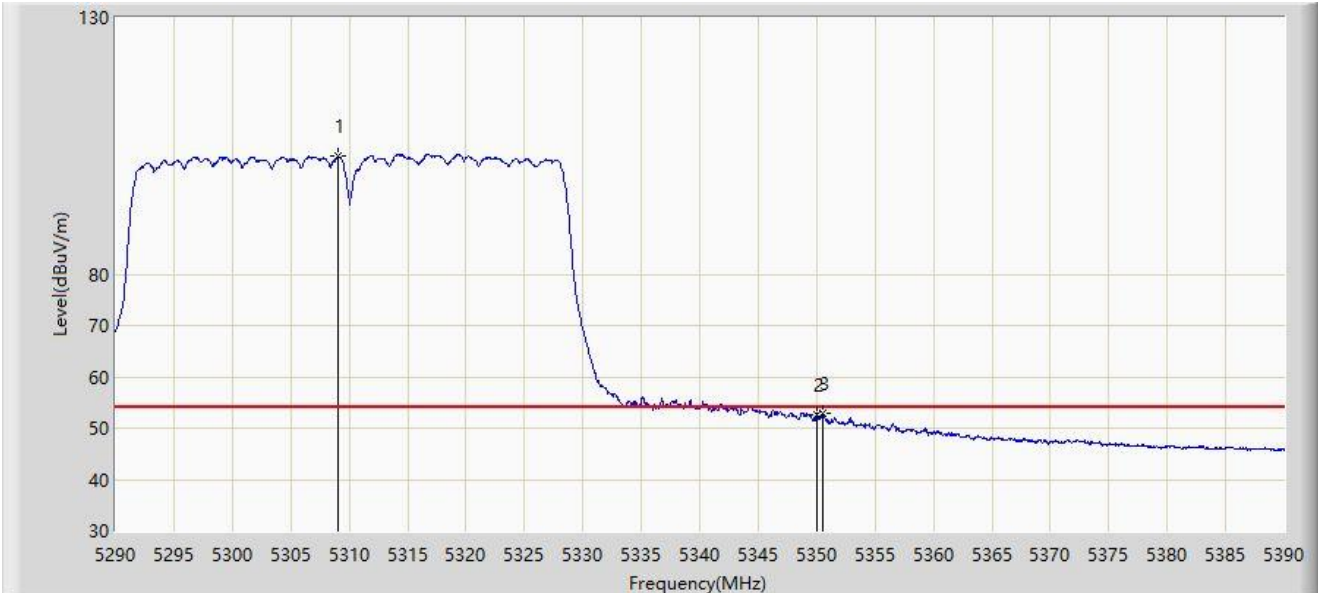

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5309.050	102.914	100.052	N/A	N/A	2.862	AV
2		5350.000	52.672	49.852	-1.328	54.000	2.820	AV
3	*	5350.500	52.757	49.946	-1.243	54.000	2.812	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

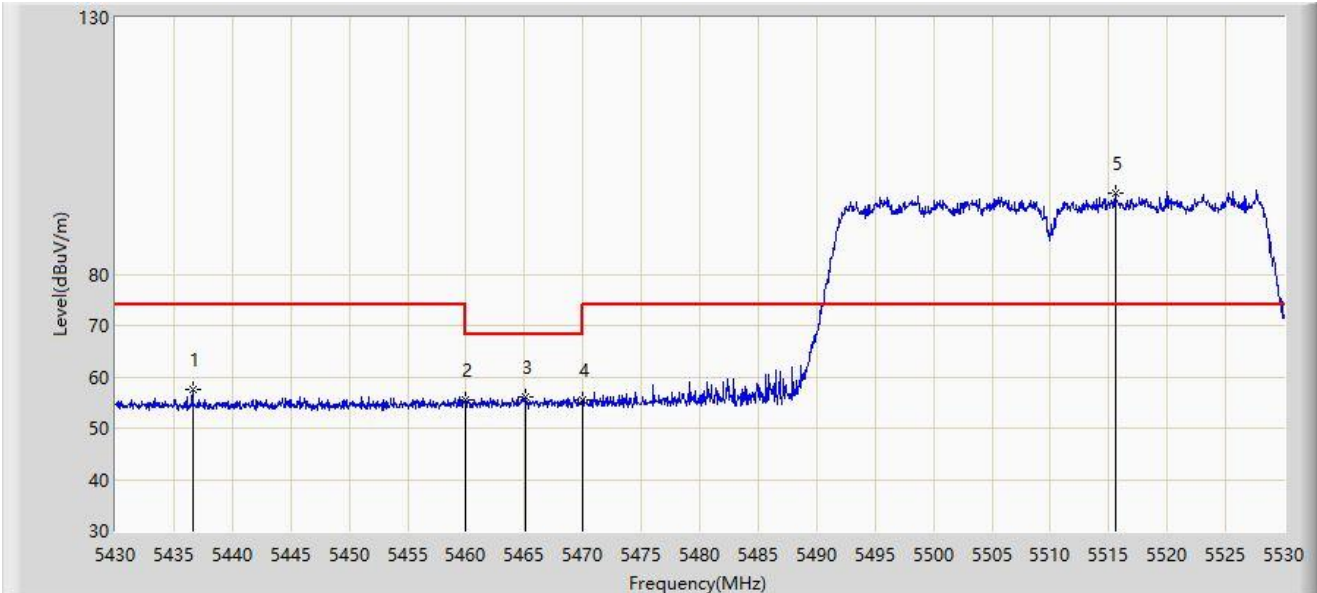


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5436.600	57.451	54.277	-16.549	74.000	3.173	PK
2		5460.000	55.605	52.456	-18.395	74.000	3.149	PK
3	*	5465.150	55.991	52.743	-12.209	68.200	3.248	PK
4		5470.000	55.642	52.300	-12.558	68.200	3.341	PK
5		5515.550	95.838	92.770	N/A	N/A	3.069	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

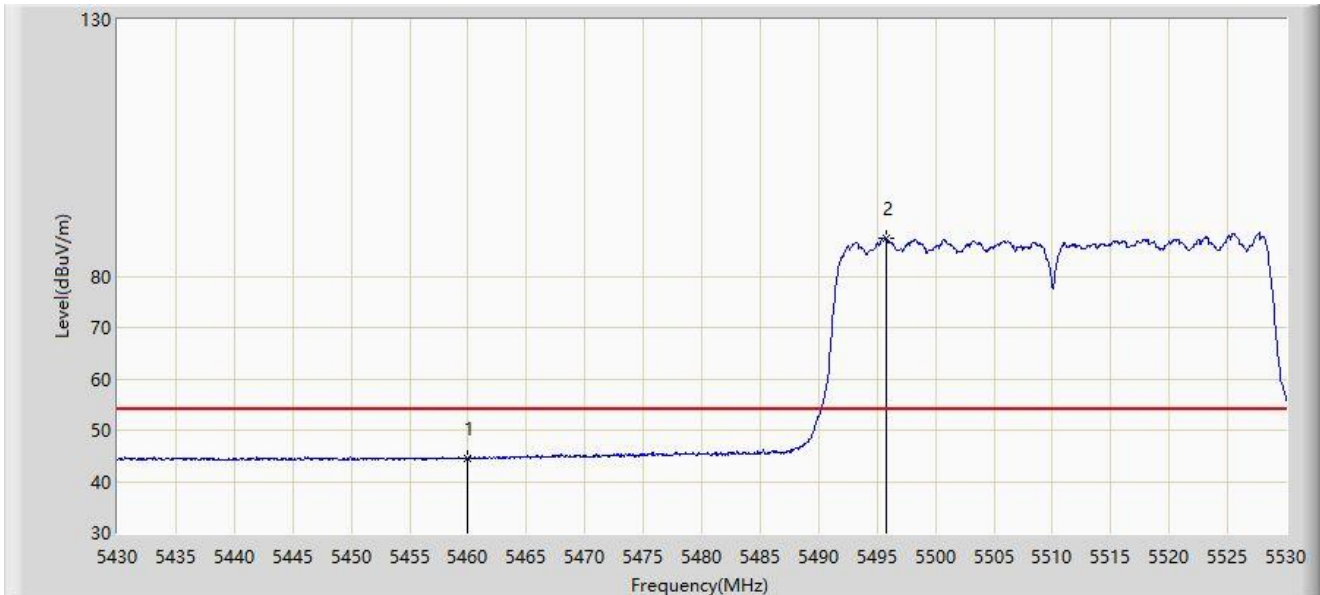


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5460.000	44.568	41.419	-9.432	54.000	3.149	AV
2		5495.750	87.390	84.175	N/A	N/A	3.216	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

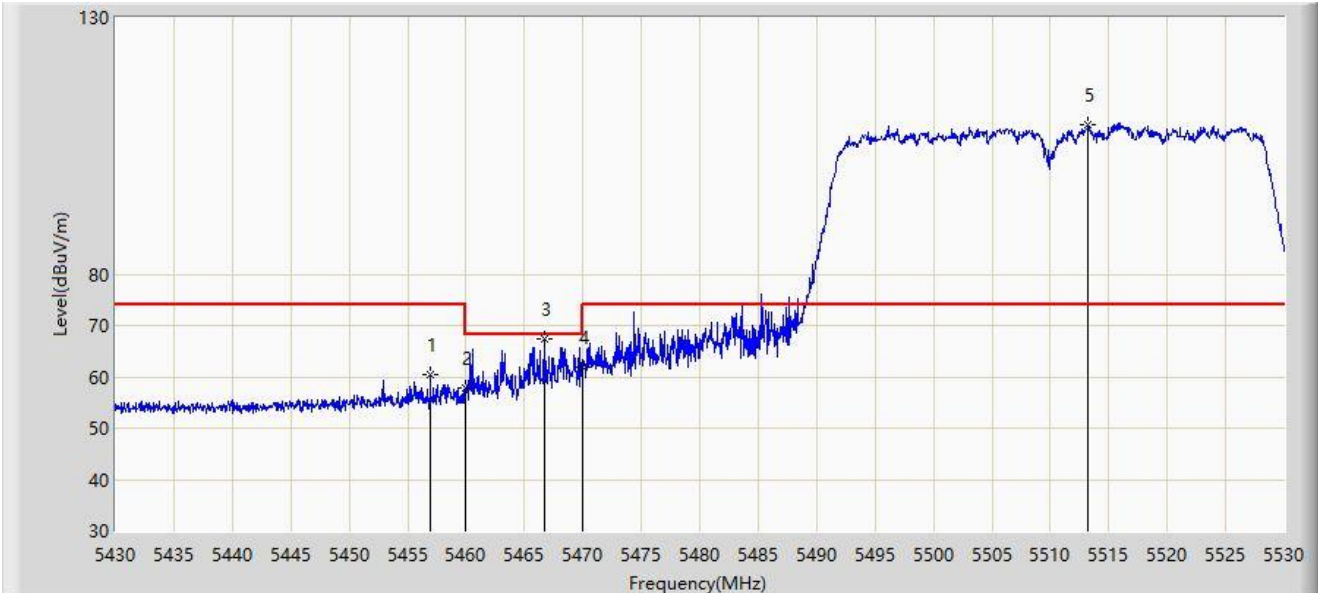


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5456.950	60.532	57.442	-13.468	74.000	3.090	PK
2		5460.000	57.970	54.821	-16.030	74.000	3.149	PK
3	*	5466.750	67.494	64.215	-0.706	68.200	3.279	PK
4		5470.000	61.987	58.645	-6.213	68.200	3.341	PK
5		5513.200	109.068	105.989	N/A	N/A	3.079	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

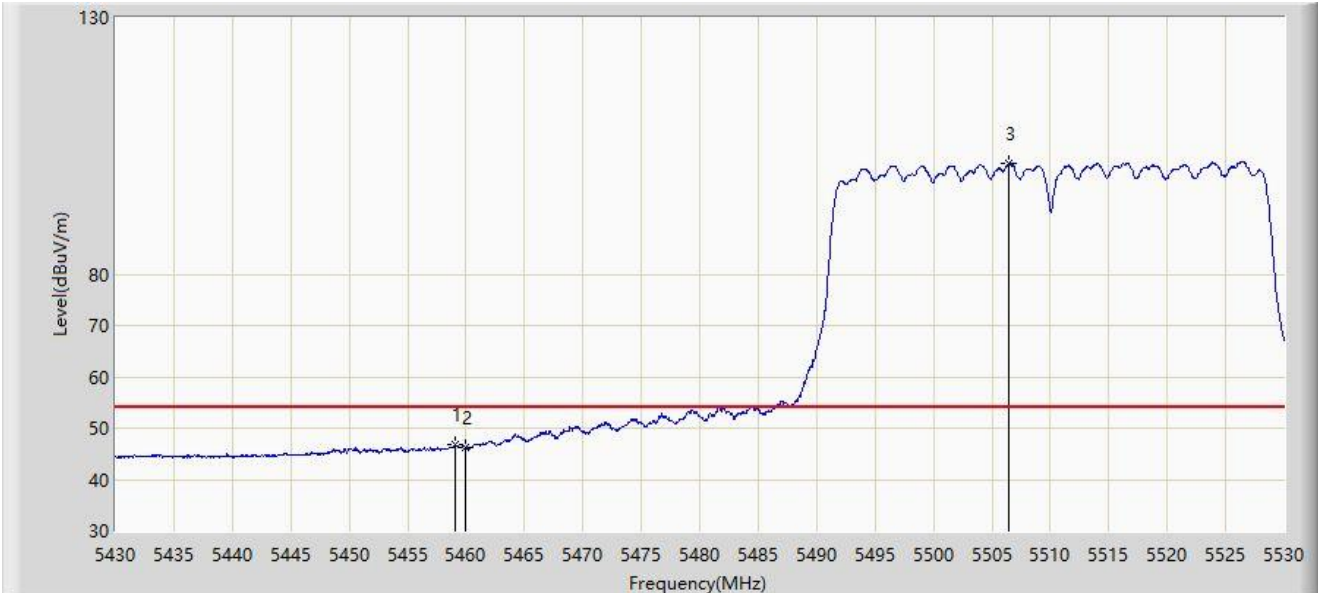


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5459.050	46.671	43.540	-7.329	54.000	3.130	AV
2		5460.000	46.273	43.124	-7.727	54.000	3.149	AV
3		5506.500	101.653	98.518	N/A	N/A	3.135	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

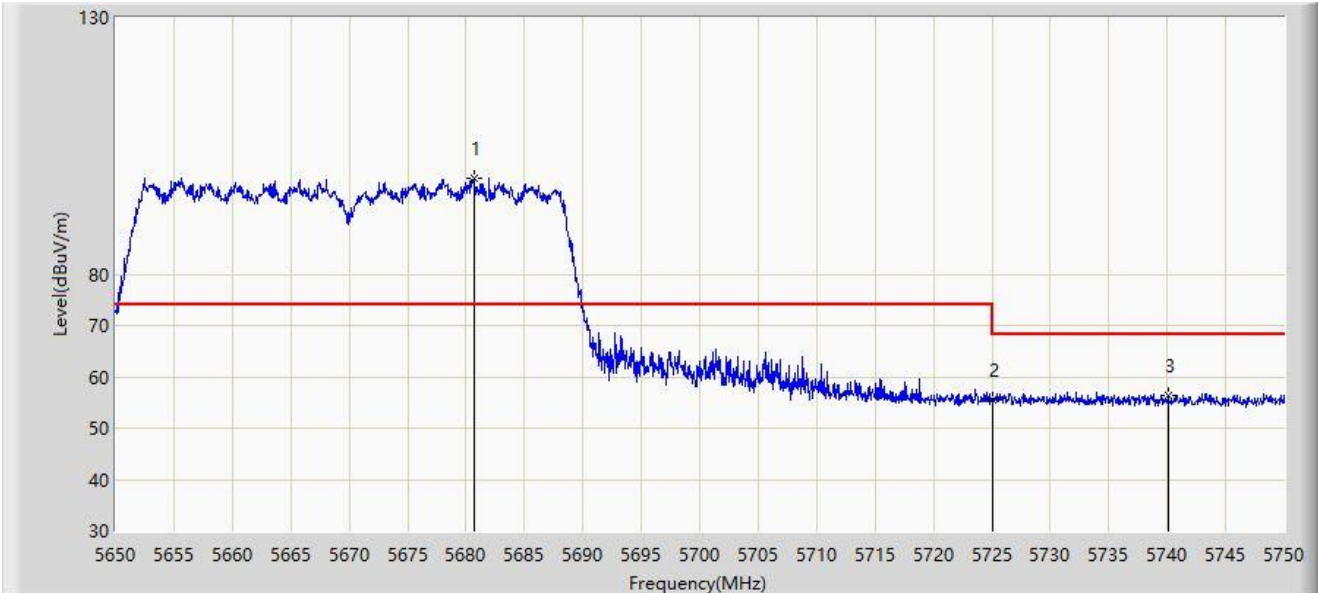


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5680.700	98.647	94.533	N/A	N/A	4.114	PK
2		5725.000	55.548	50.845	-12.652	68.200	4.703	PK
3	*	5740.100	56.247	51.782	-11.953	68.200	4.466	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

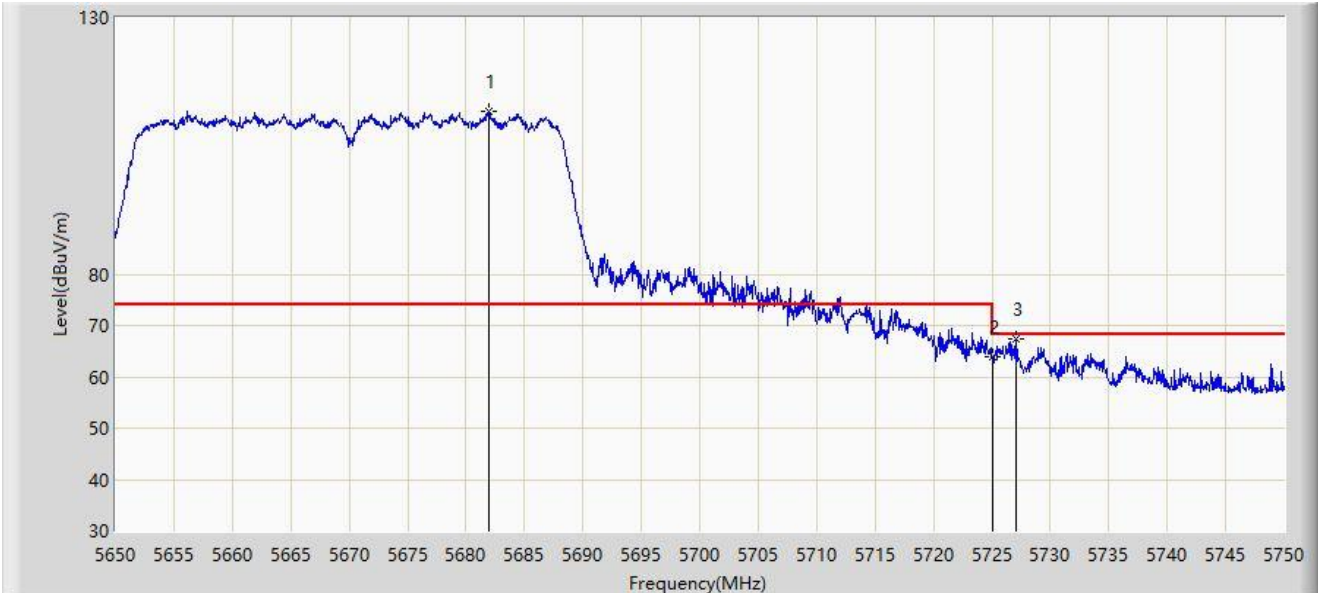


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5681.950	111.700	107.564	N/A	N/A	4.136	PK
2		5725.000	63.836	59.133	-4.364	68.200	4.703	PK
3	*	5727.050	67.281	62.585	-0.919	68.200	4.696	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

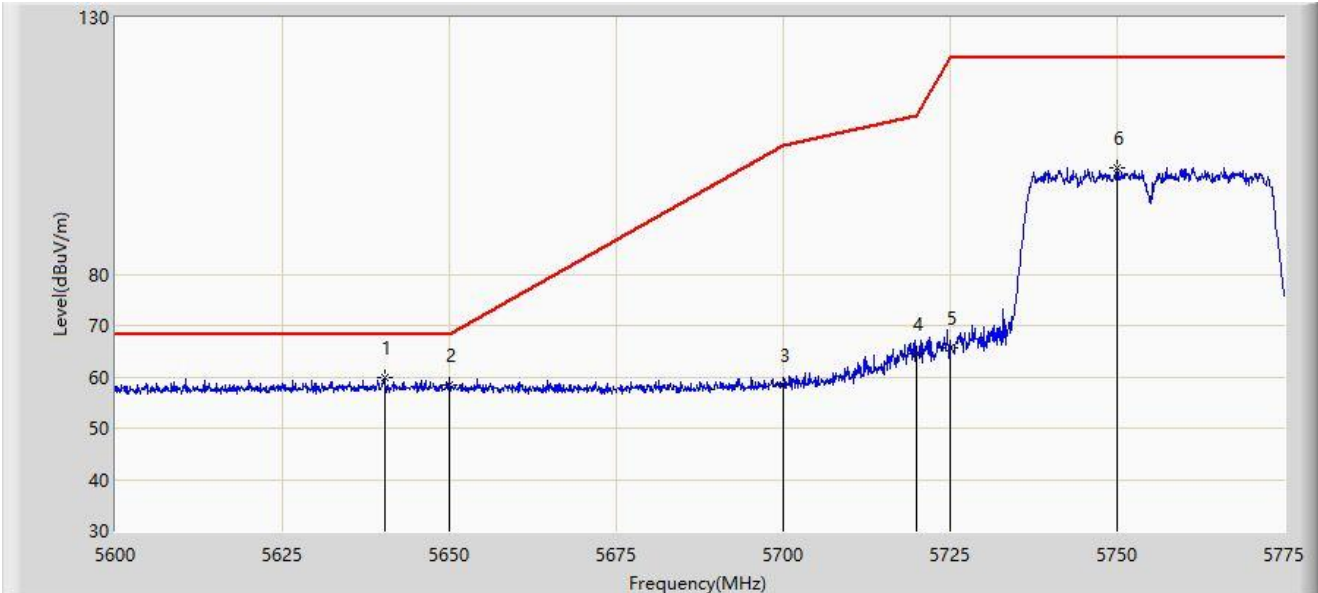


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5640.337	59.718	55.560	-8.482	68.200	4.157	PK
2		5650.000	58.488	54.365	-9.712	68.200	4.122	PK
3		5700.000	58.353	53.916	-46.847	105.200	4.437	PK
4		5720.000	64.590	59.926	-46.210	110.800	4.663	PK
5		5725.000	65.708	61.005	-56.492	122.200	4.703	PK
6		5750.062	100.818	96.337	N/A	N/A	4.481	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

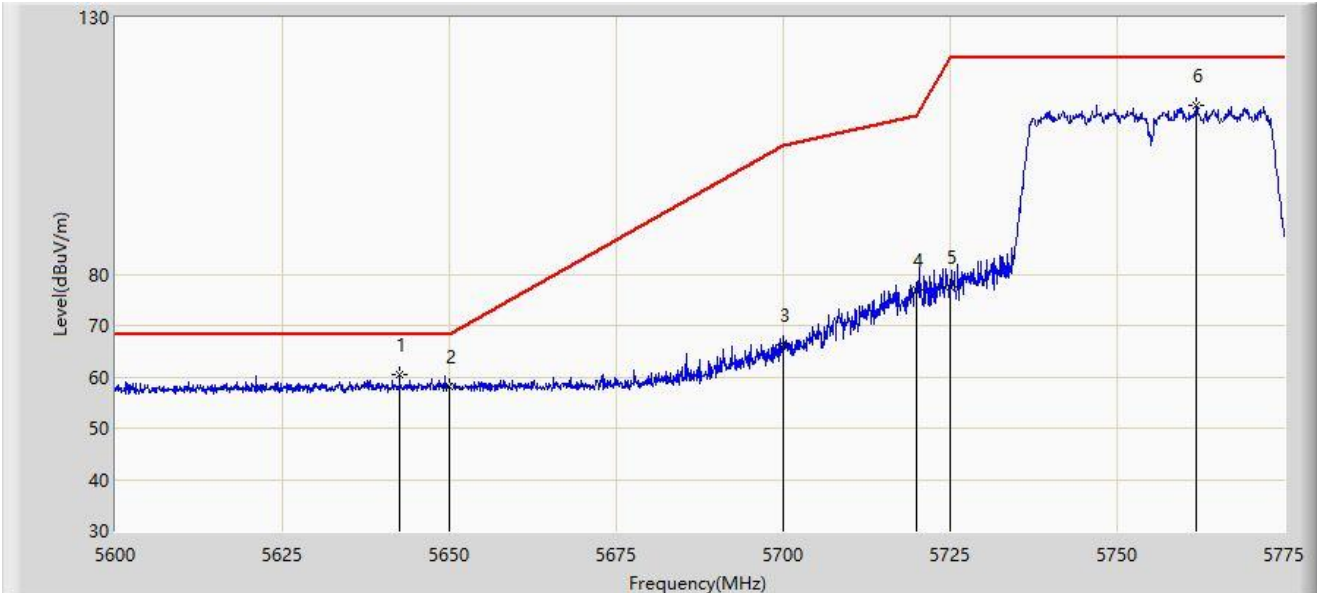

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5642.525	60.514	56.355	-7.686	68.200	4.160	PK
2		5650.000	58.207	54.084	-9.993	68.200	4.122	PK
3		5700.000	66.329	61.892	-38.871	105.200	4.437	PK
4		5720.000	77.072	72.408	-33.728	110.800	4.663	PK
5		5725.000	77.429	72.726	-44.771	122.200	4.703	PK
6		5761.875	112.835	108.190	N/A	N/A	4.645	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

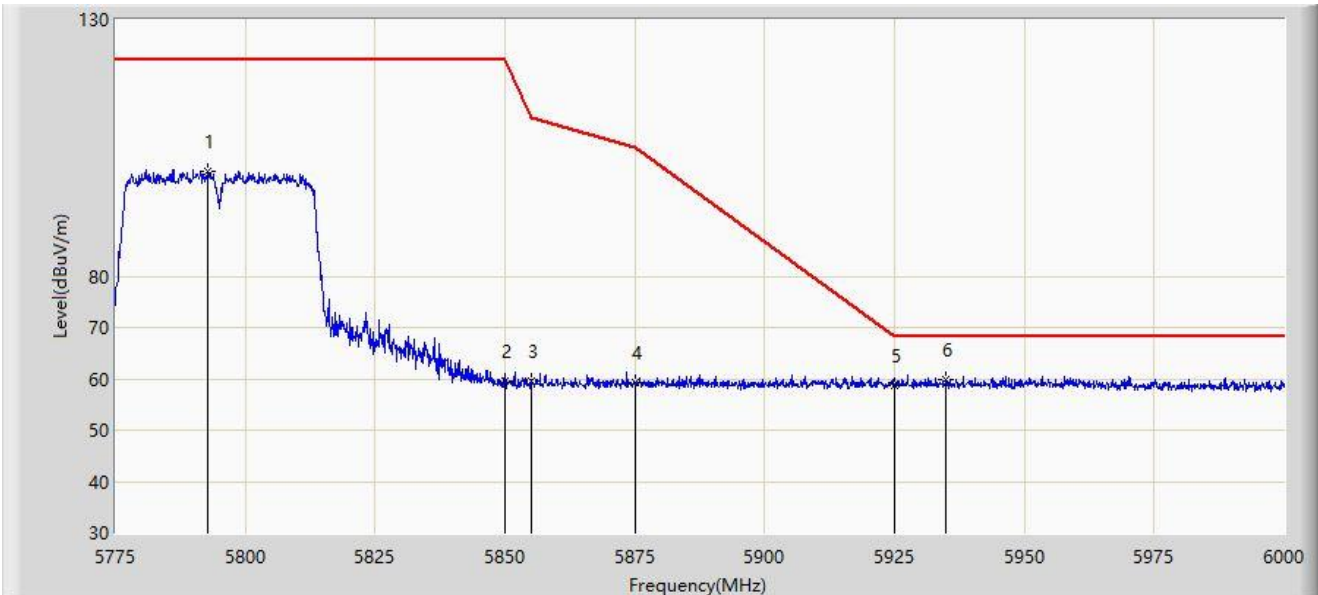


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5792.663	100.532	95.473	N/A	N/A	5.059	PK
2		5850.000	59.452	54.469	-62.748	122.200	4.984	PK
3		5855.000	59.488	54.450	-51.312	110.800	5.038	PK
4		5875.000	59.207	54.076	-45.993	105.200	5.131	PK
5		5925.000	58.829	53.594	-9.371	68.200	5.236	PK
6	*	5934.862	59.974	54.698	-8.226	68.200	5.276	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

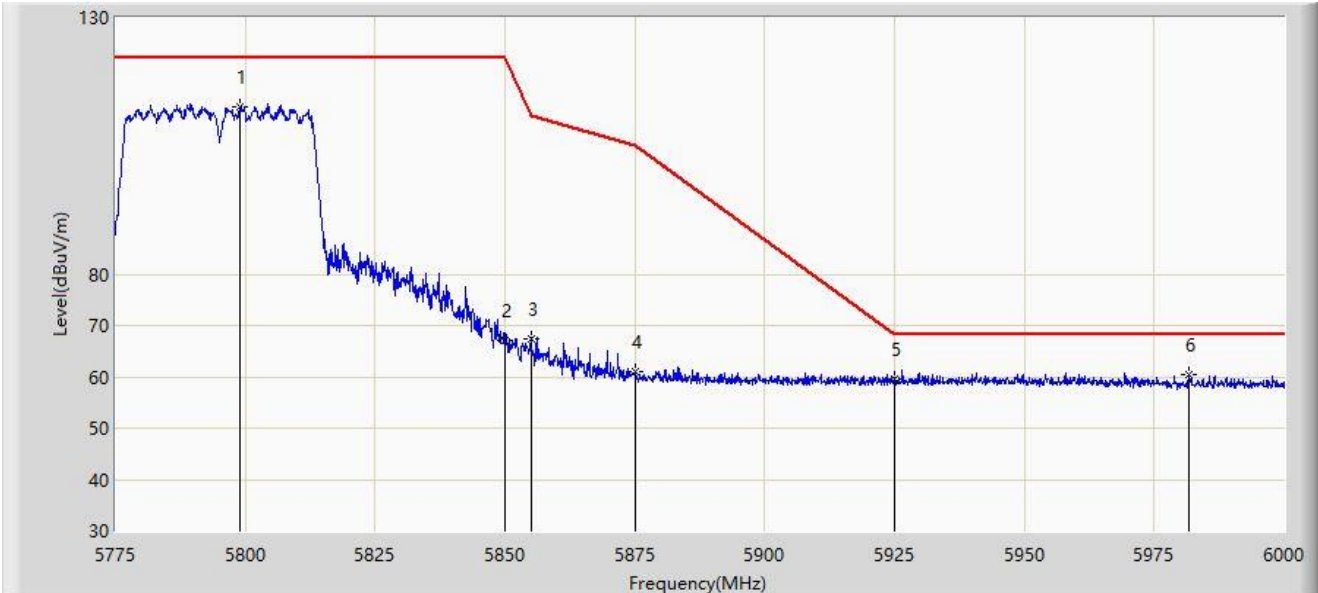


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5798.850	112.530	107.458	N/A	N/A	5.073	PK
2		5850.000	67.029	62.046	-55.171	122.200	4.984	PK
3		5855.000	67.287	62.249	-43.513	110.800	5.038	PK
4		5875.000	60.920	55.789	-44.280	105.200	5.131	PK
5		5925.000	59.644	54.409	-8.556	68.200	5.236	PK
6	*	5981.775	60.401	55.162	-7.799	68.200	5.239	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

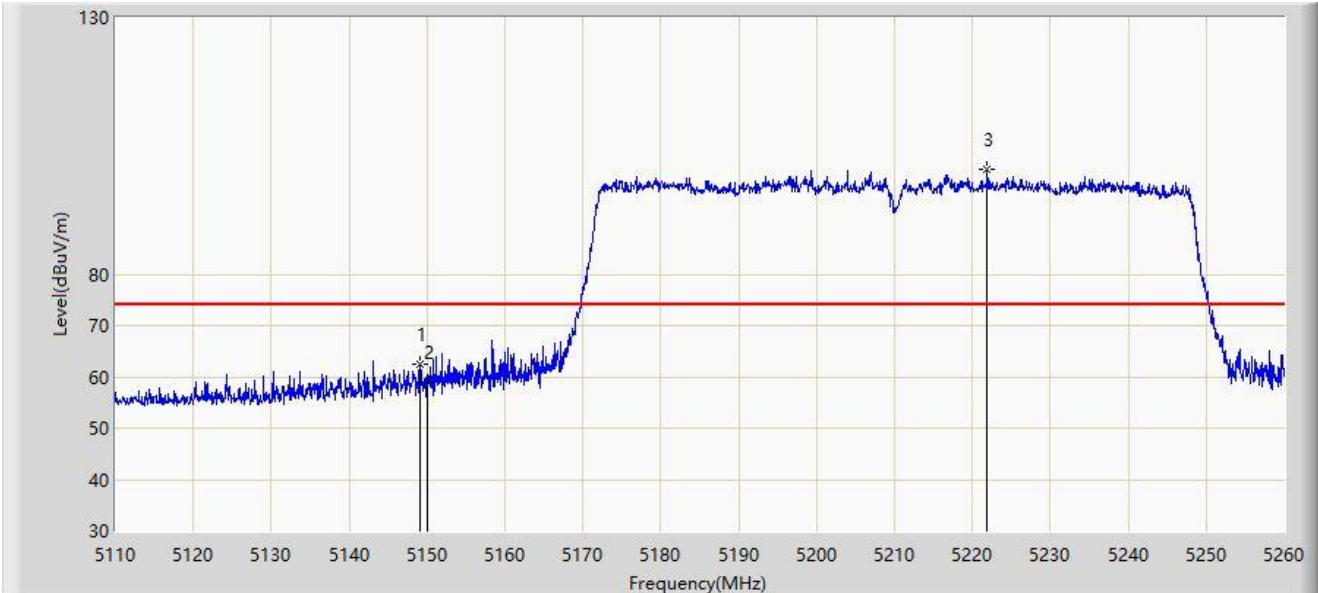


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5149.150	62.577	59.098	-11.423	74.000	3.479	PK
2		5150.000	59.120	55.638	-14.880	74.000	3.482	PK
3		5221.900	100.505	97.491	N/A	N/A	3.015	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

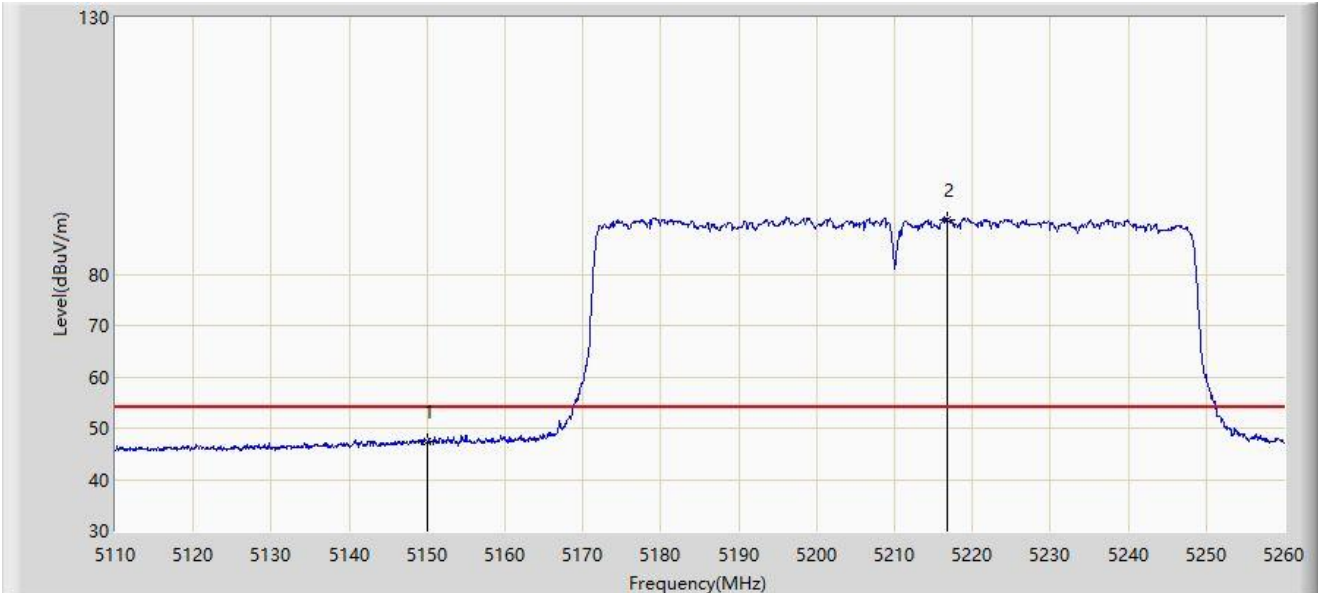


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	47.372	43.890	-6.628	54.000	3.482	AV
2		5216.725	90.449	87.518	N/A	N/A	2.932	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

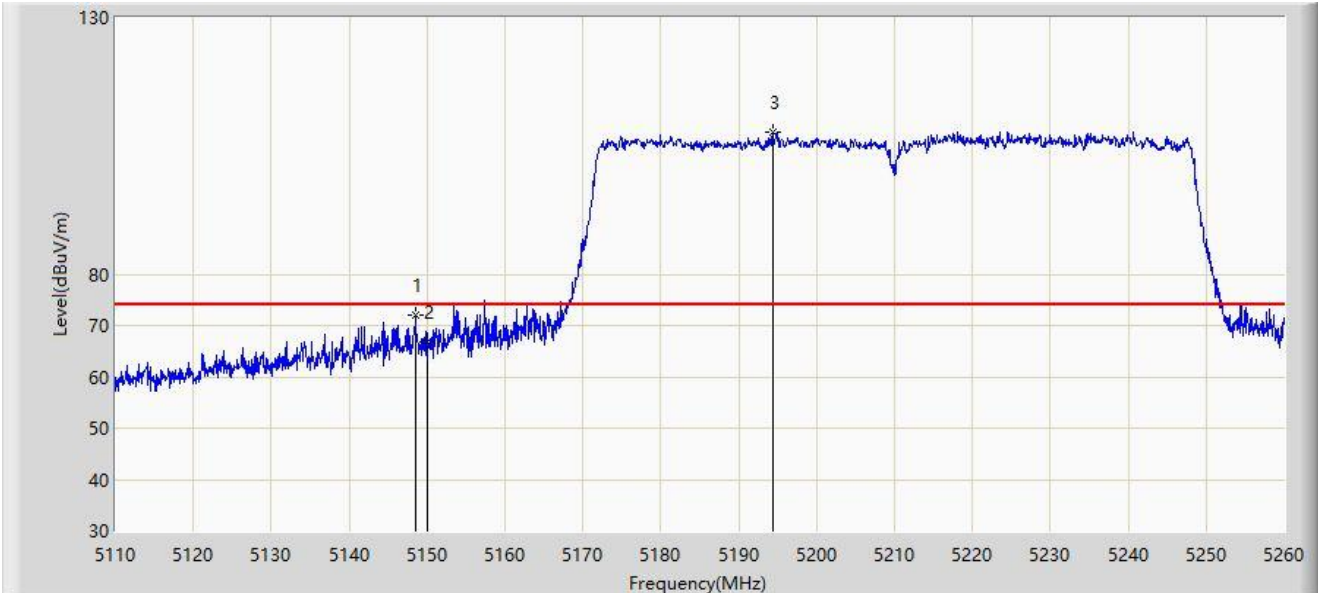


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5148.550	72.035	68.558	-1.965	74.000	3.477	PK
2		5150.000	66.712	63.230	-7.288	74.000	3.482	PK
3		5194.375	107.695	104.741	N/A	N/A	2.954	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

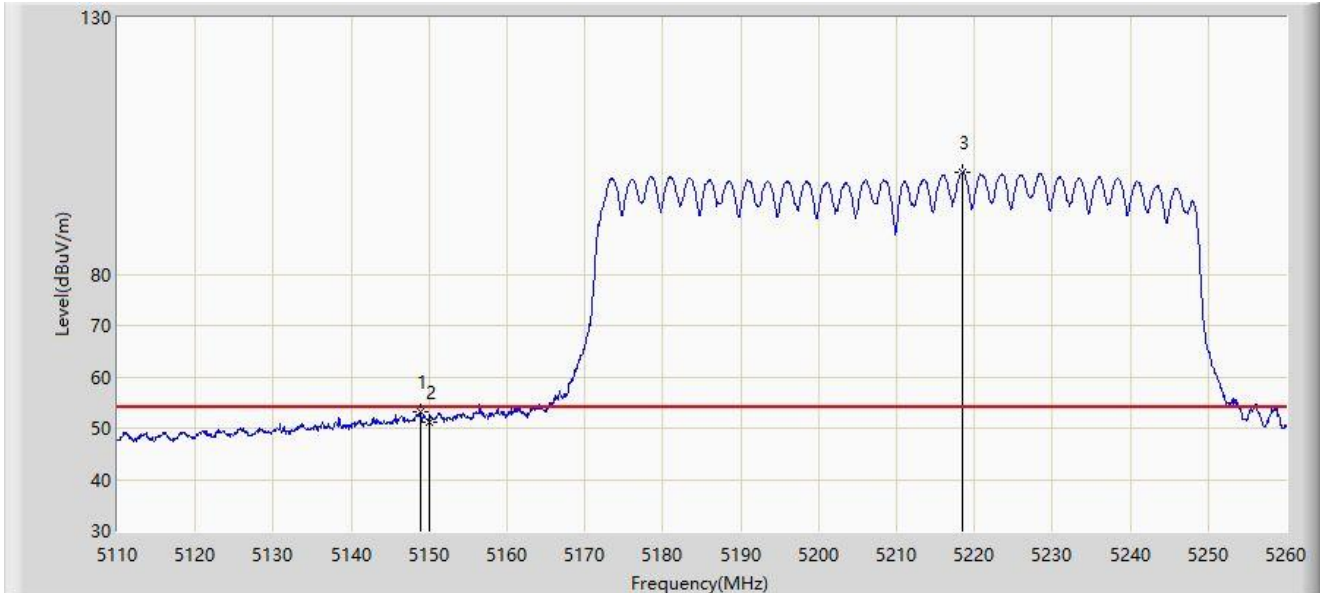


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.850	53.302	49.824	-0.698	54.000	3.478	AV
2		5150.000	51.267	47.785	-2.733	54.000	3.482	AV
3		5218.450	99.817	96.858	N/A	N/A	2.958	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

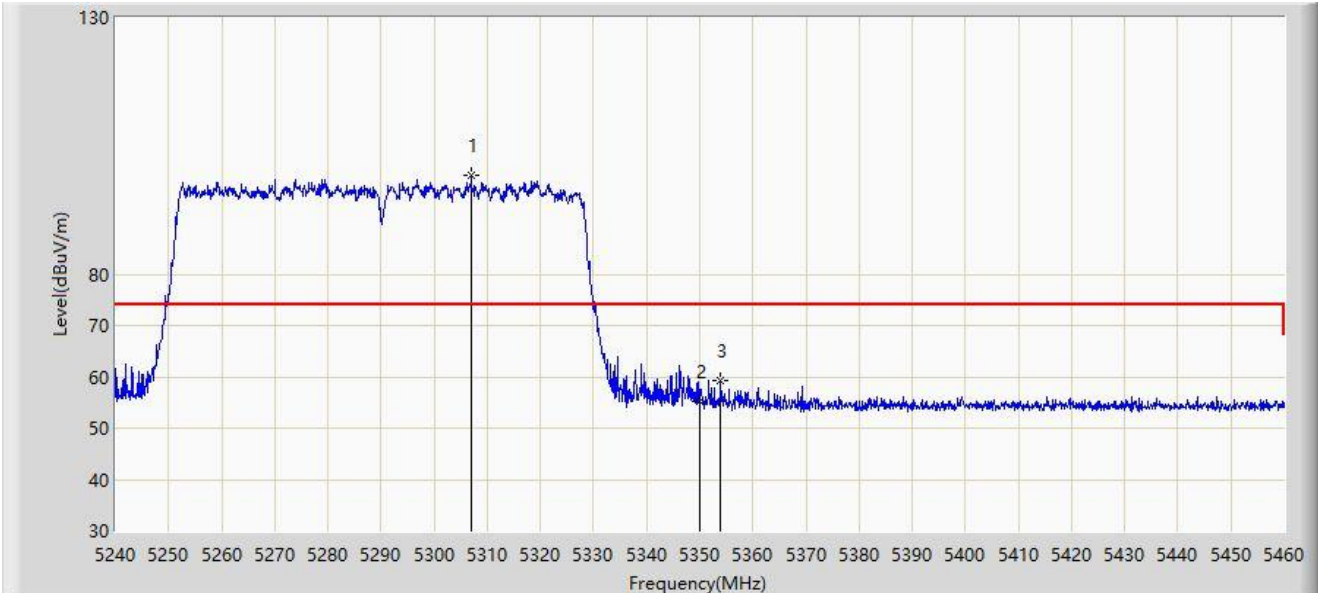


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5306.990	99.396	96.566	N/A	N/A	2.829	PK
2		5350.000	55.247	52.427	-18.753	74.000	2.820	PK
3	*	5353.960	59.189	56.394	-14.811	74.000	2.795	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

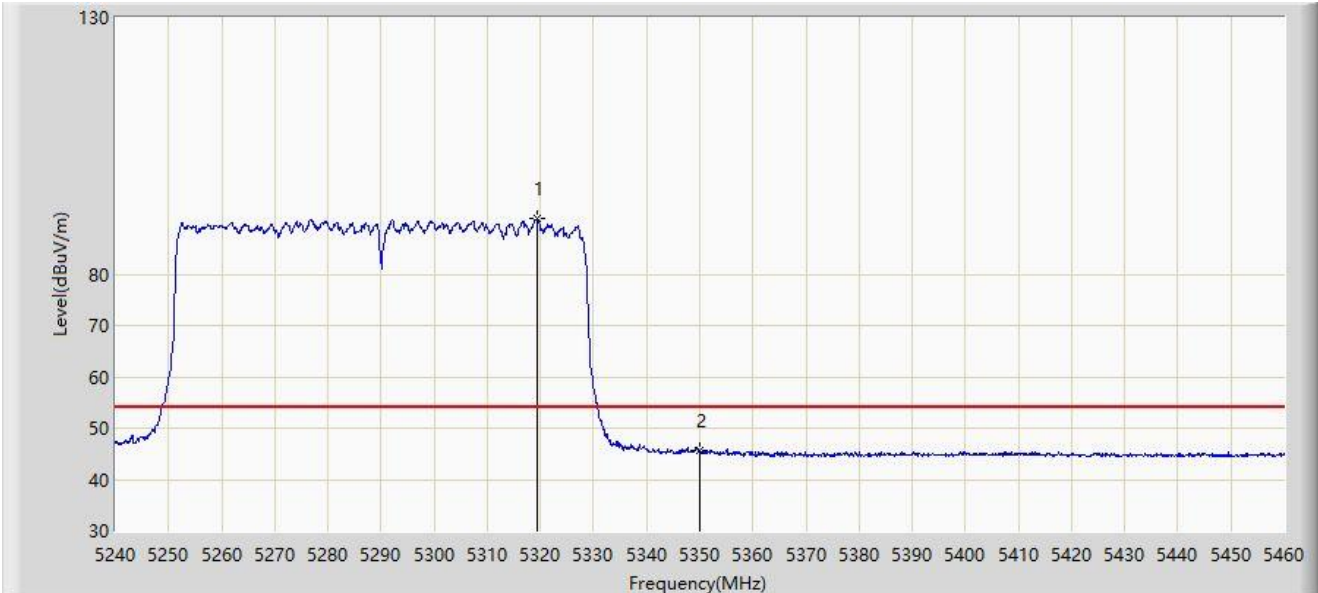

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5319.530	90.750	87.742	N/A	N/A	3.008	AV
2	*	5350.000	45.528	42.708	-8.472	54.000	2.820	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

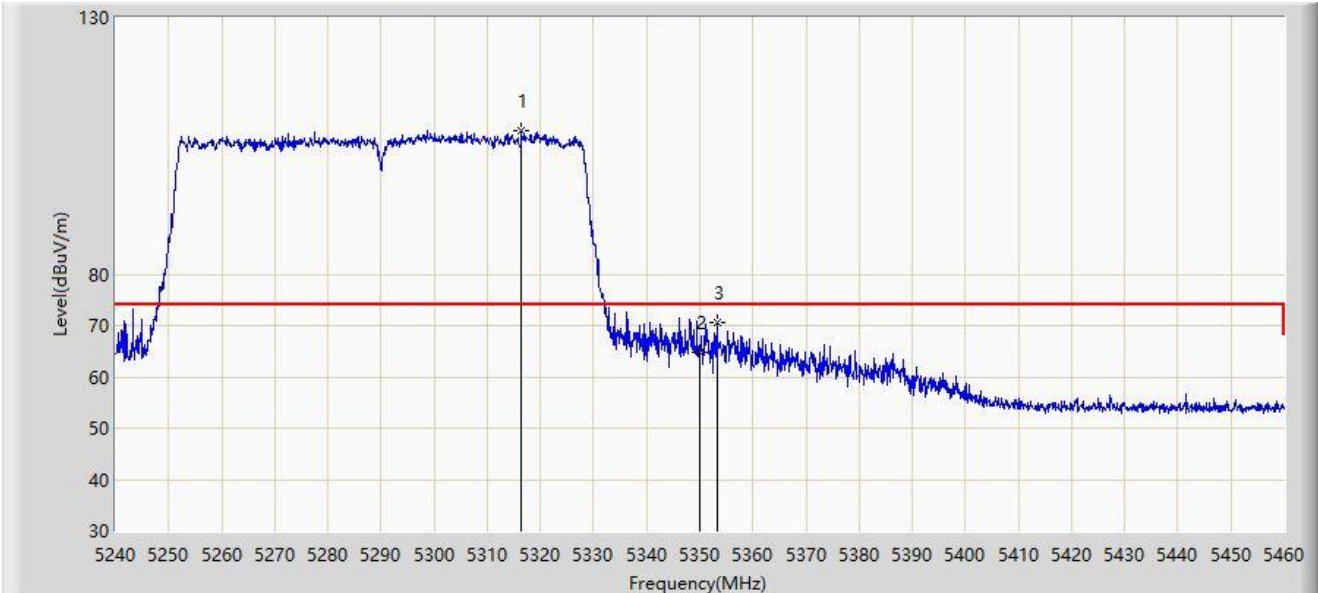


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5316.340	108.008	105.027	N/A	N/A	2.981	PK
2		5350.000	64.861	62.041	-9.139	74.000	2.820	PK
3	*	5353.190	70.714	67.922	-3.286	74.000	2.792	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

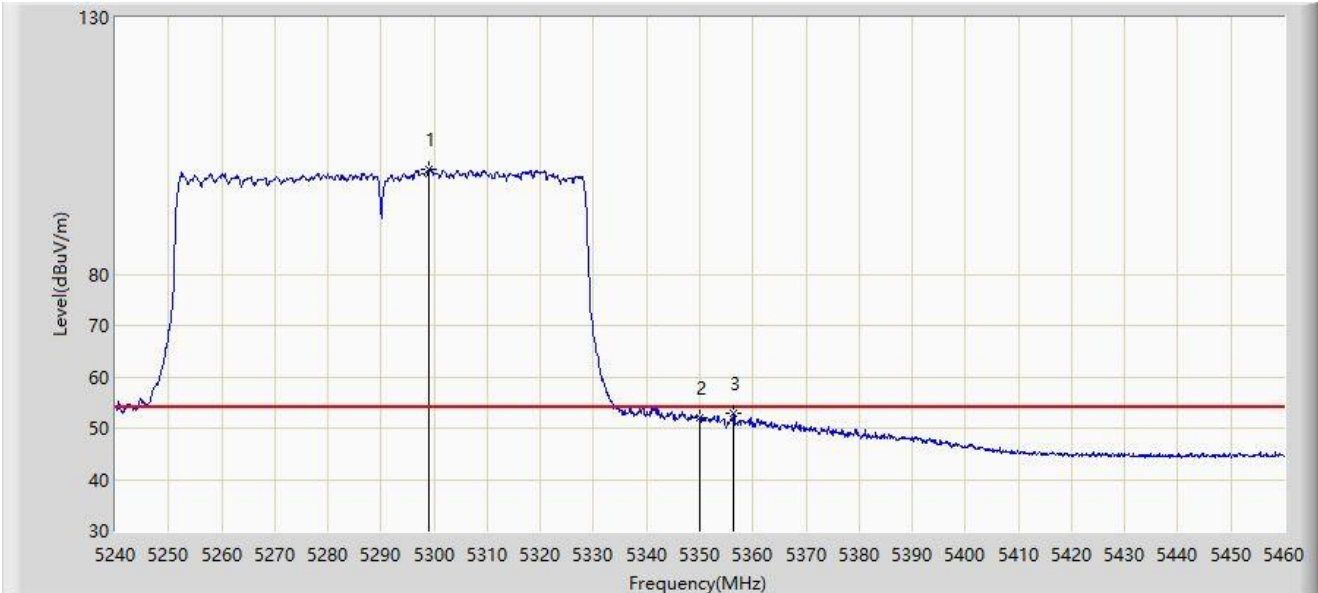


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5299.070	100.413	97.698	N/A	N/A	2.715	AV
2		5350.000	51.967	49.147	-2.033	54.000	2.820	AV
3	*	5356.380	52.871	50.065	-1.129	54.000	2.806	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

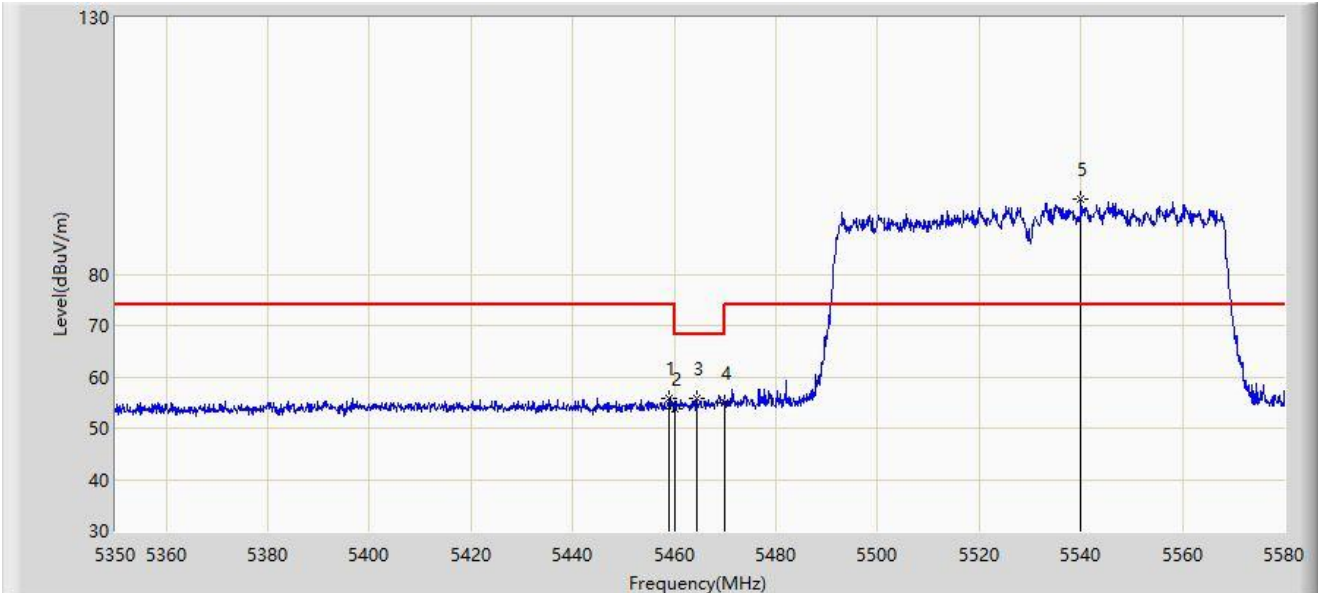


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5459.020	55.678	52.548	-18.322	74.000	3.130	PK
2		5460.000	53.713	50.564	-20.287	74.000	3.149	PK
3	*	5464.540	55.852	52.615	-12.348	68.200	3.237	PK
4		5470.000	54.968	51.626	-13.232	68.200	3.341	PK
5		5539.980	94.551	91.226	N/A	N/A	3.325	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

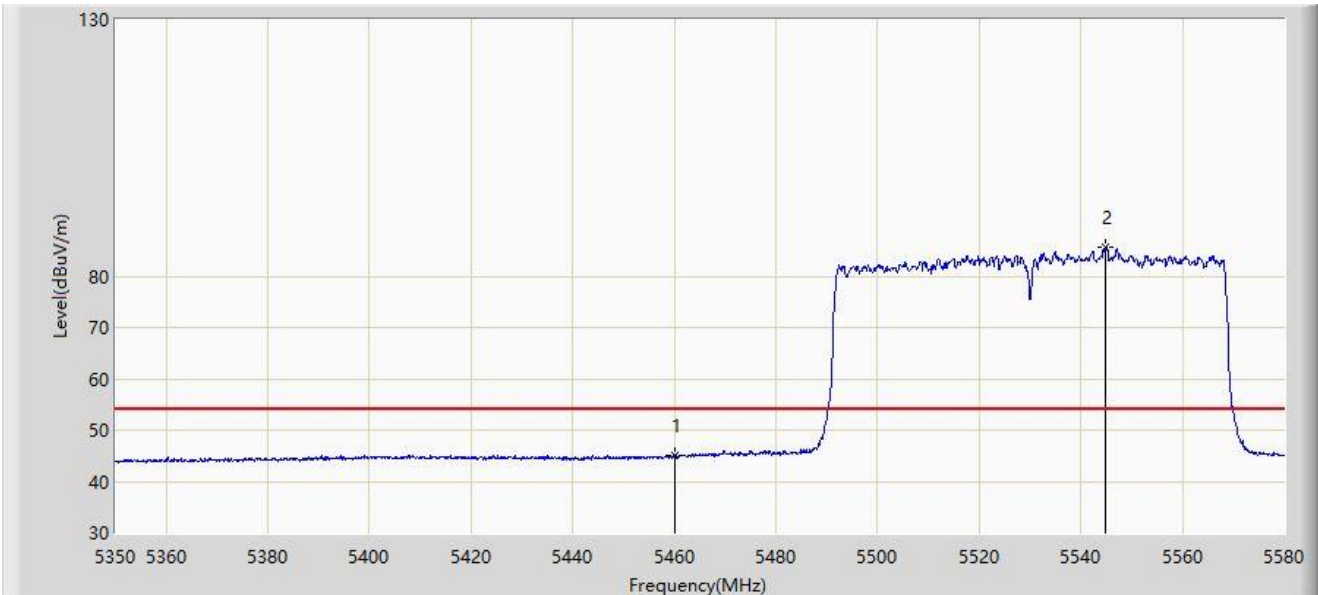


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5460.000	44.937	41.788	-9.063	54.000	3.149	AV
2		5544.925	85.557	82.184	N/A	N/A	3.373	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

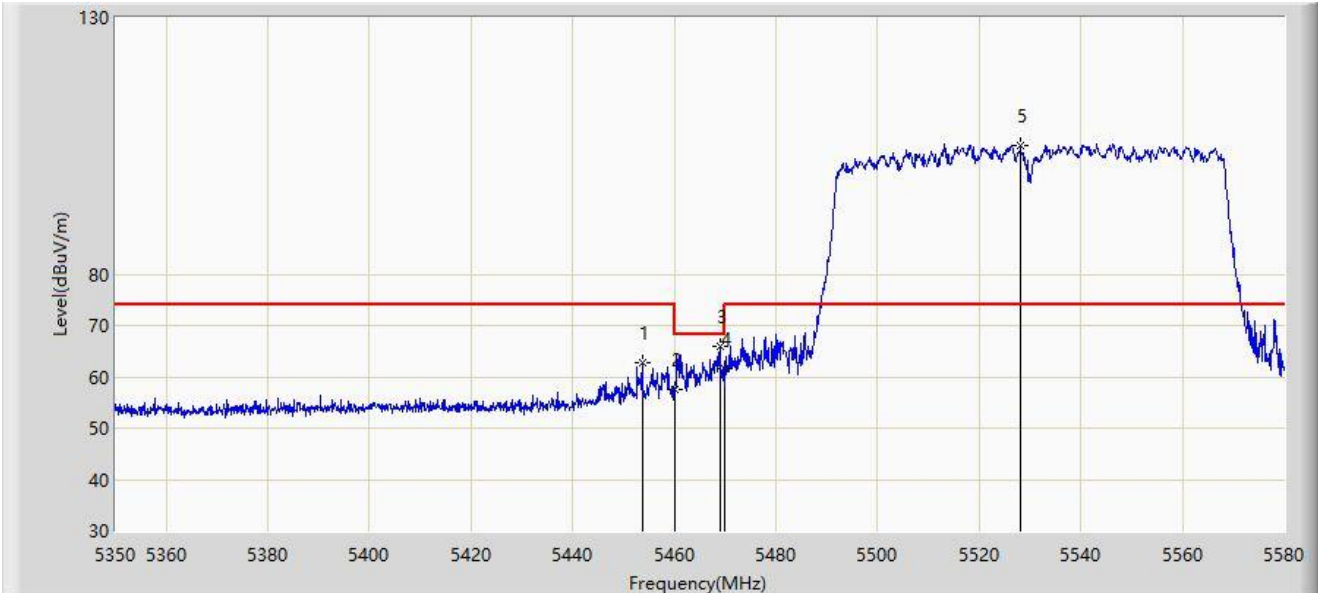


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5453.730	62.809	59.763	-11.191	74.000	3.046	PK
2		5460.000	57.593	54.444	-16.407	74.000	3.149	PK
3	*	5468.910	65.984	62.663	-2.216	68.200	3.321	PK
4		5470.000	61.700	58.358	-6.500	68.200	3.341	PK
5		5528.135	105.098	101.925	N/A	N/A	3.173	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

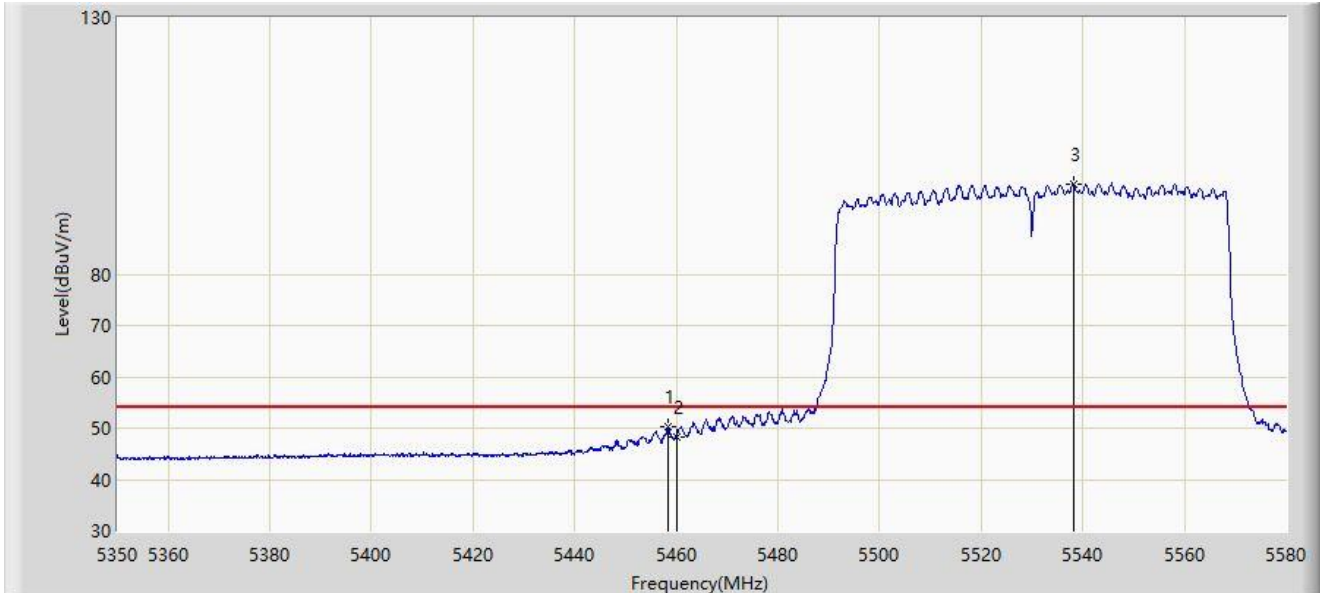


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5458.445	50.210	47.091	-3.790	54.000	3.119	AV
2		5460.000	48.142	44.993	-5.858	54.000	3.149	AV
3		5538.140	97.552	94.247	N/A	N/A	3.305	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

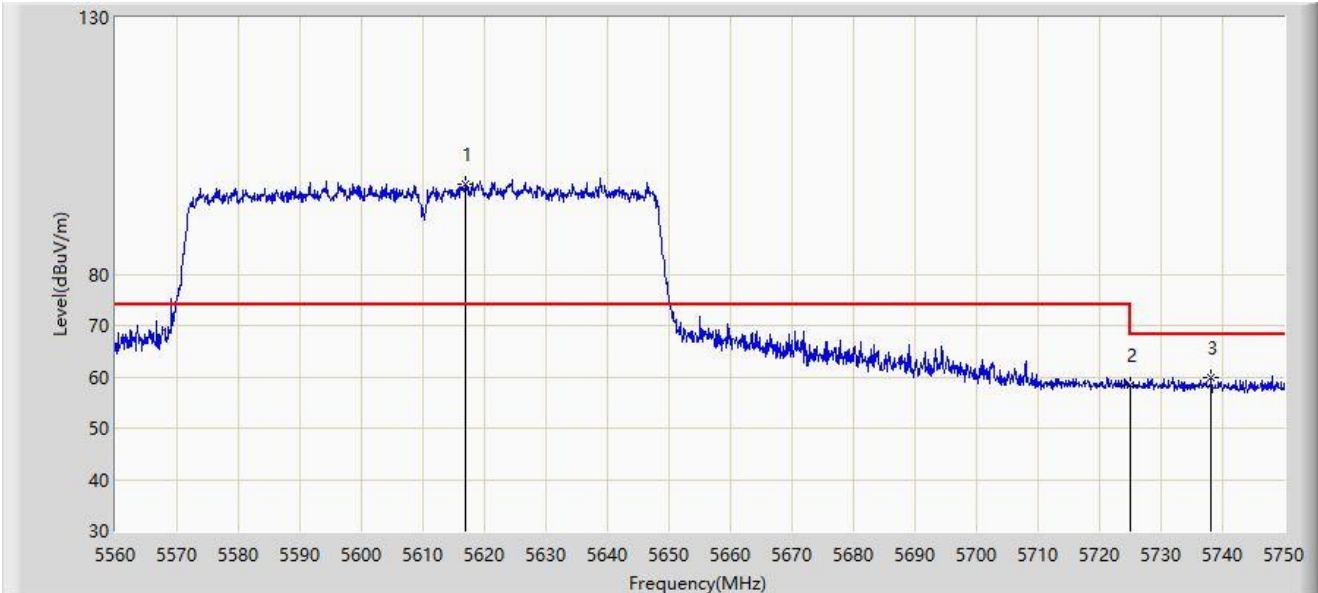


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5617.000	97.396	93.625	N/A	N/A	3.771	PK
2		5725.000	58.361	53.658	-9.839	68.200	4.703	PK
3	*	5738.125	59.850	55.350	-8.350	68.200	4.500	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

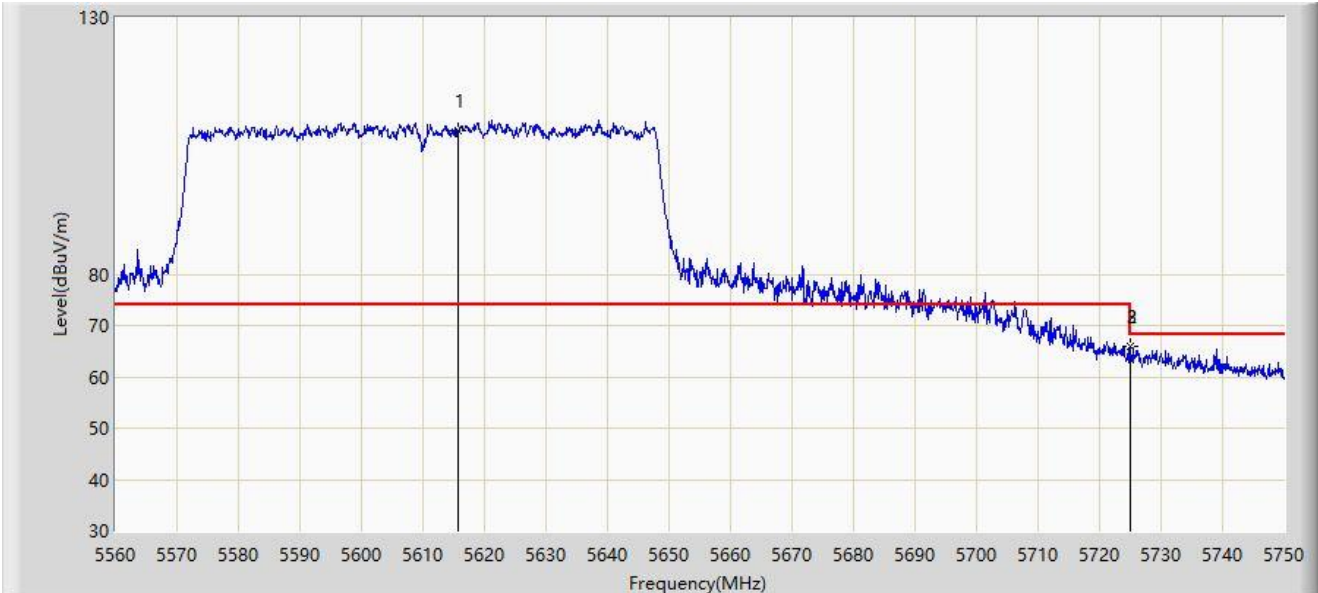

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5615.765	107.956	104.212	N/A	N/A	3.744	PK
2		5725.000	65.958	61.255	-2.242	68.200	4.703	PK
3	*	5725.015	66.060	61.357	-2.140	68.200	4.703	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

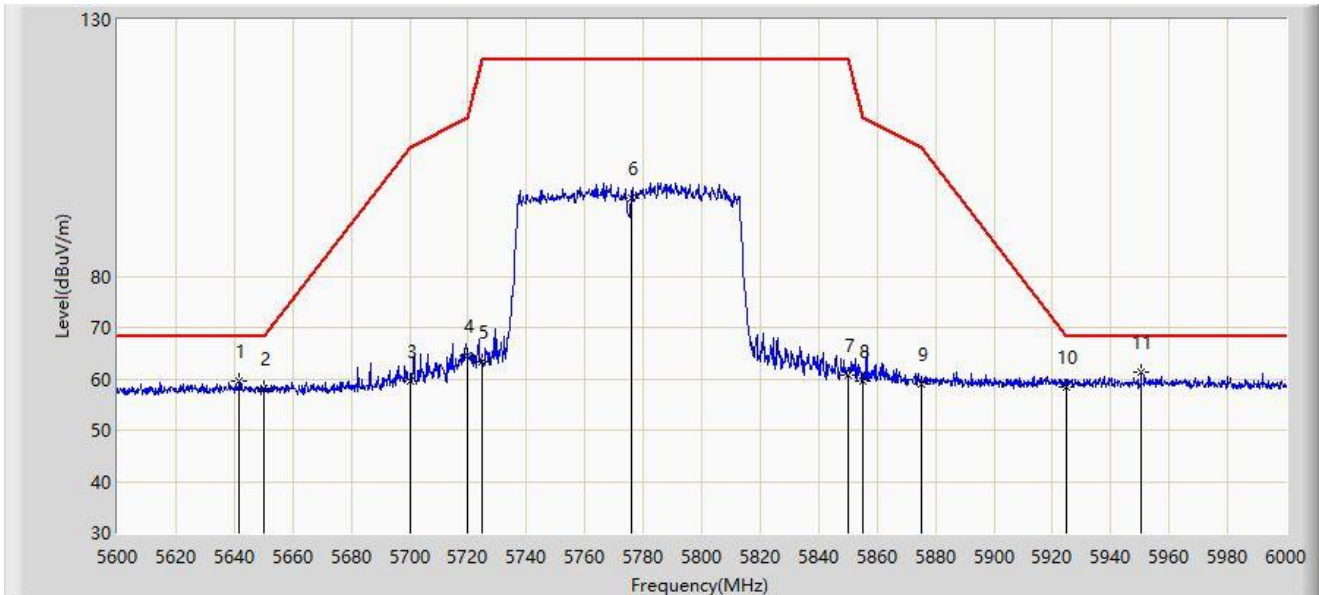


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5641.600	59.429	55.265	-8.771	68.200	4.164	PK
2		5650.000	58.004	53.881	-10.196	68.200	4.122	PK
3		5700.000	59.434	54.997	-45.766	105.200	4.437	PK
4		5720.000	64.503	59.839	-46.297	110.800	4.663	PK
5		5725.000	63.276	58.573	-58.924	122.200	4.703	PK
6		5776.000	95.361	90.493	N/A	N/A	4.868	PK
7		5850.000	60.699	55.716	-61.501	122.200	4.984	PK
8		5855.000	59.613	54.575	-51.187	110.800	5.038	PK
9		5875.000	58.907	53.776	-46.293	105.200	5.131	PK
10		5925.000	58.468	53.233	-9.732	68.200	5.236	PK
11	*	5950.400	61.189	55.831	-7.011	68.200	5.359	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5.8G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

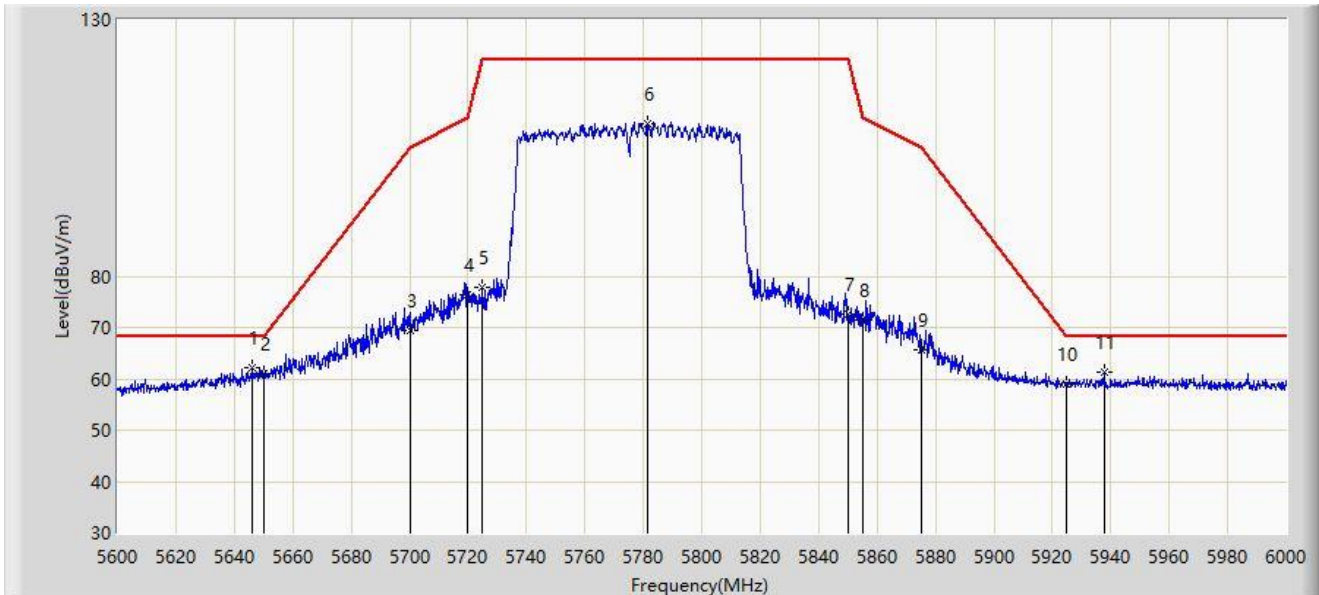


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5646.200	62.175	58.034	-6.025	68.200	4.141	PK
2		5650.000	60.880	56.757	-7.320	68.200	4.122	PK
3		5700.000	69.448	65.011	-35.752	105.200	4.437	PK
4		5720.000	76.311	71.647	-34.489	110.800	4.663	PK
5		5725.000	77.784	73.081	-44.416	122.200	4.703	PK
6		5781.400	109.722	104.796	N/A	N/A	4.927	PK
7		5850.000	72.511	67.528	-49.689	122.200	4.984	PK
8		5855.000	71.404	66.366	-39.396	110.800	5.038	PK
9		5875.000	65.650	60.519	-39.550	105.200	5.131	PK
10		5925.000	58.901	53.666	-9.299	68.200	5.236	PK
11		5937.600	61.246	55.963	-6.954	68.200	5.283	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

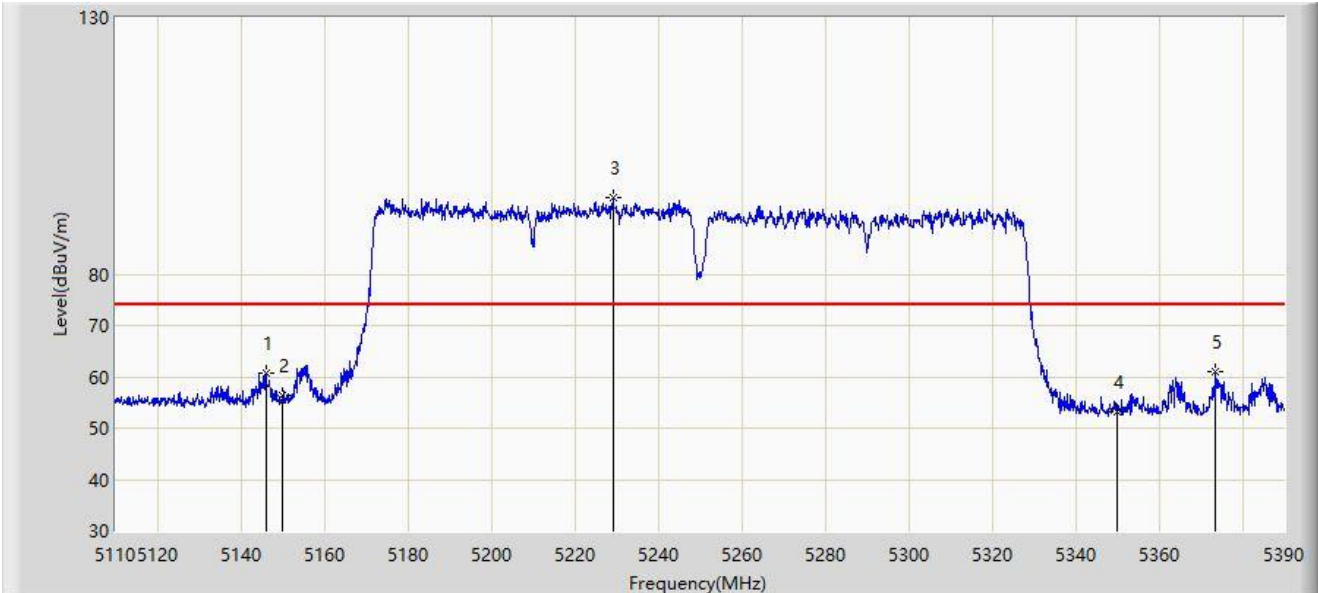


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5145.980	60.667	57.217	-13.333	74.000	3.451	PK
2		5150.000	56.265	52.783	-17.735	74.000	3.482	PK
3		5229.280	94.922	91.765	N/A	N/A	3.157	PK
4		5350.000	53.057	50.237	-20.943	74.000	2.820	PK
5	*	5373.620	60.960	58.009	-13.040	74.000	2.951	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

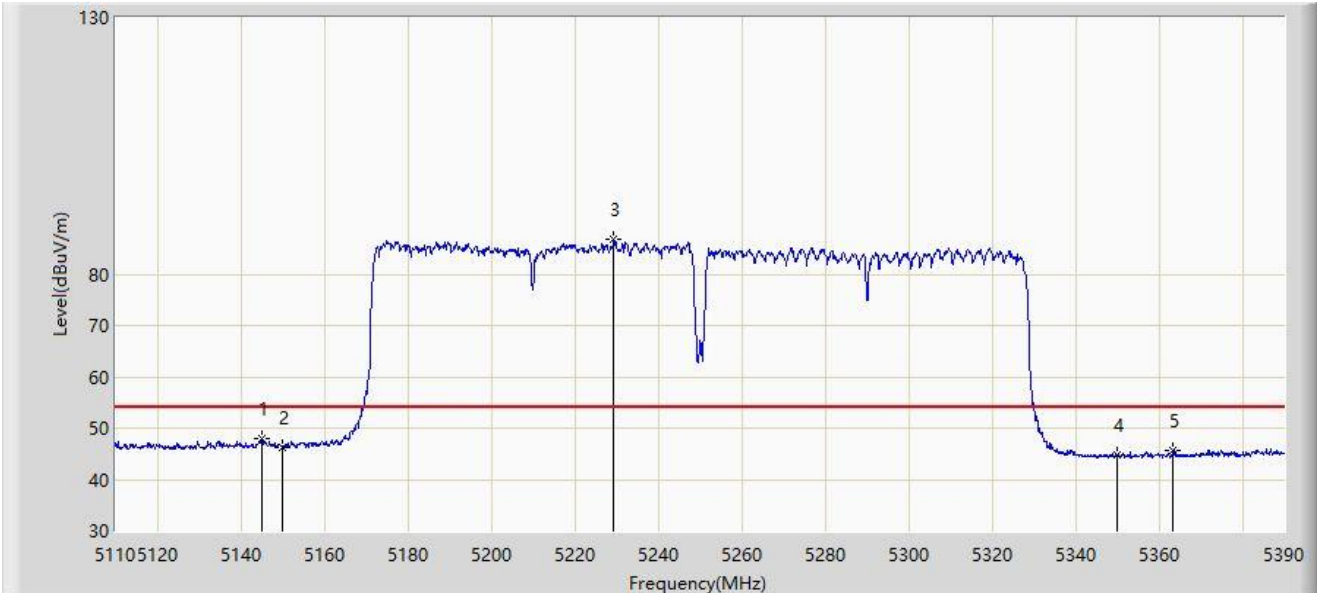


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5145.140	47.963	44.524	-6.037	54.000	3.439	AV
2		5150.000	46.309	42.827	-7.691	54.000	3.482	AV
3		5229.420	86.827	83.667	N/A	N/A	3.160	AV
4		5350.000	44.680	41.860	-9.320	54.000	2.820	AV
5		5363.400	45.755	42.918	-8.245	54.000	2.838	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

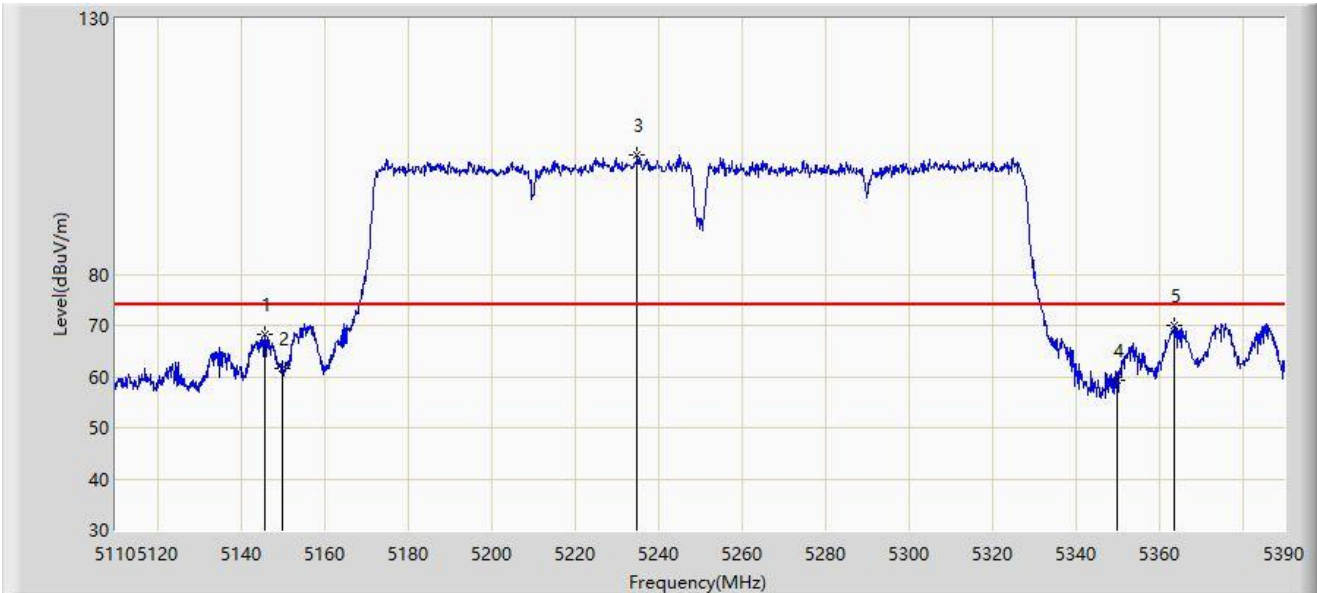


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5145.700	68.343	64.896	-5.657	74.000	3.446	PK
2		5150.000	61.599	58.117	-12.401	74.000	3.482	PK
3		5234.880	103.374	100.146	N/A	N/A	3.228	PK
4		5350.000	59.286	56.466	-14.714	74.000	2.820	PK
5	*	5363.540	70.137	67.299	-3.863	74.000	2.838	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

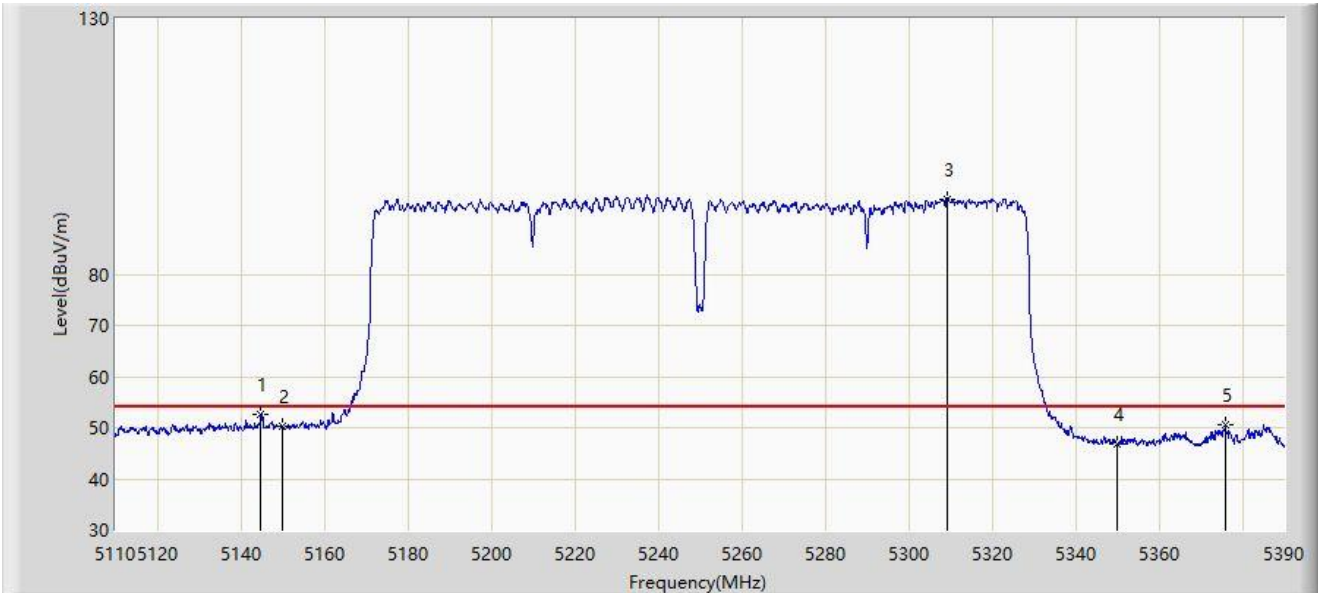


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5144.860	52.593	49.157	-1.407	54.000	3.437	AV
2		5150.000	50.146	46.664	-3.854	54.000	3.482	AV
3		5309.220	94.758	91.894	N/A	N/A	2.864	AV
4		5350.000	46.835	44.015	-7.165	54.000	2.820	AV
5		5376.000	50.671	47.674	-3.329	54.000	2.997	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

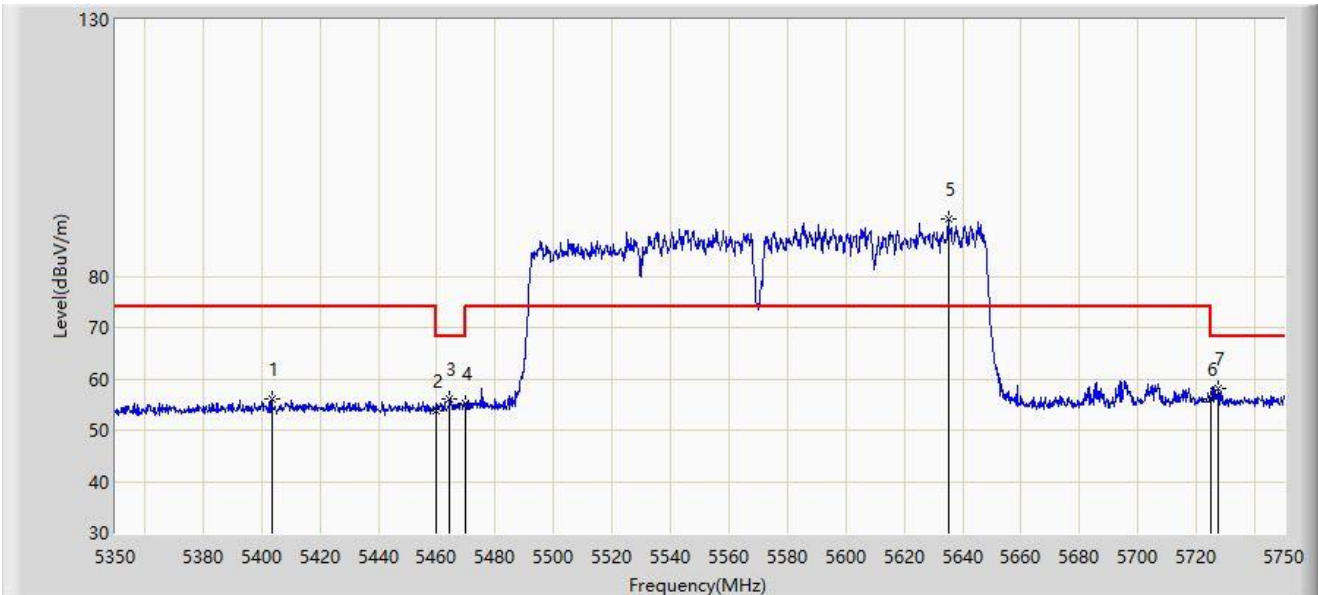


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5403.400	55.977	52.476	-18.023	74.000	3.501	PK
2		5460.000	53.797	50.648	-20.203	74.000	3.149	PK
3		5464.400	55.960	52.726	-12.240	68.200	3.234	PK
4		5470.000	55.254	51.912	-12.946	68.200	3.341	PK
5		5635.000	91.296	87.207	N/A	N/A	4.089	PK
6		5725.000	55.970	51.267	-12.230	68.200	4.703	PK
7	*	5727.200	58.150	53.456	-10.050	68.200	4.693	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

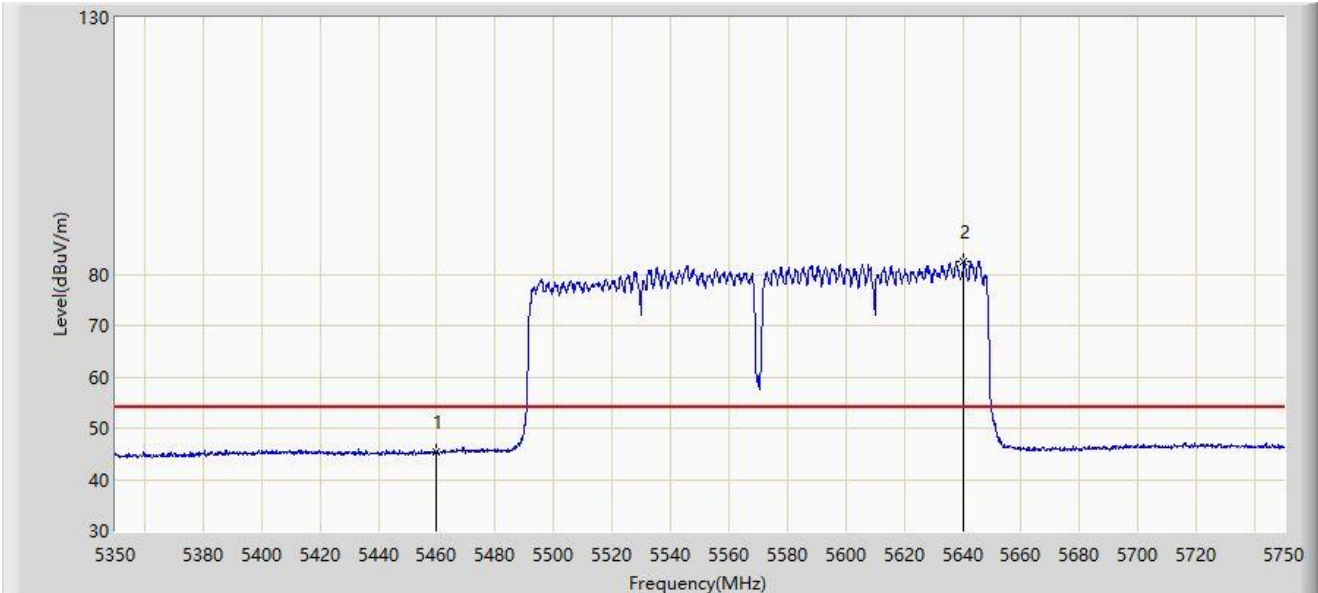

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	45.441	42.292	-8.559	54.000	3.149	AV
2		5640.400	82.361	78.202	N/A	N/A	4.159	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

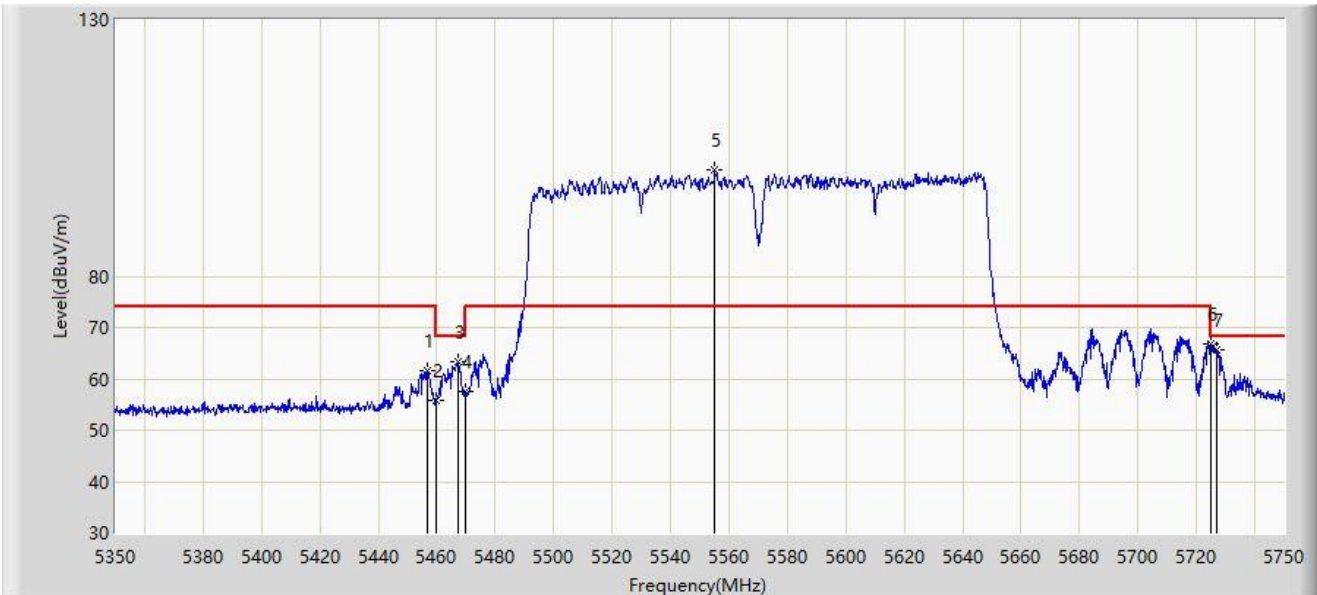


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5457.000	61.636	58.545	-12.364	74.000	3.091	PK
2		5460.000	55.679	52.530	-18.321	74.000	3.149	PK
3		5467.400	63.469	60.177	-4.731	68.200	3.292	PK
4		5470.000	57.505	54.163	-10.695	68.200	3.341	PK
5		5555.000	100.657	97.176	N/A	N/A	3.482	PK
6	*	5725.000	66.849	62.146	-1.351	68.200	4.703	PK
7		5726.800	65.669	60.968	-2.531	68.200	4.701	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-06
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

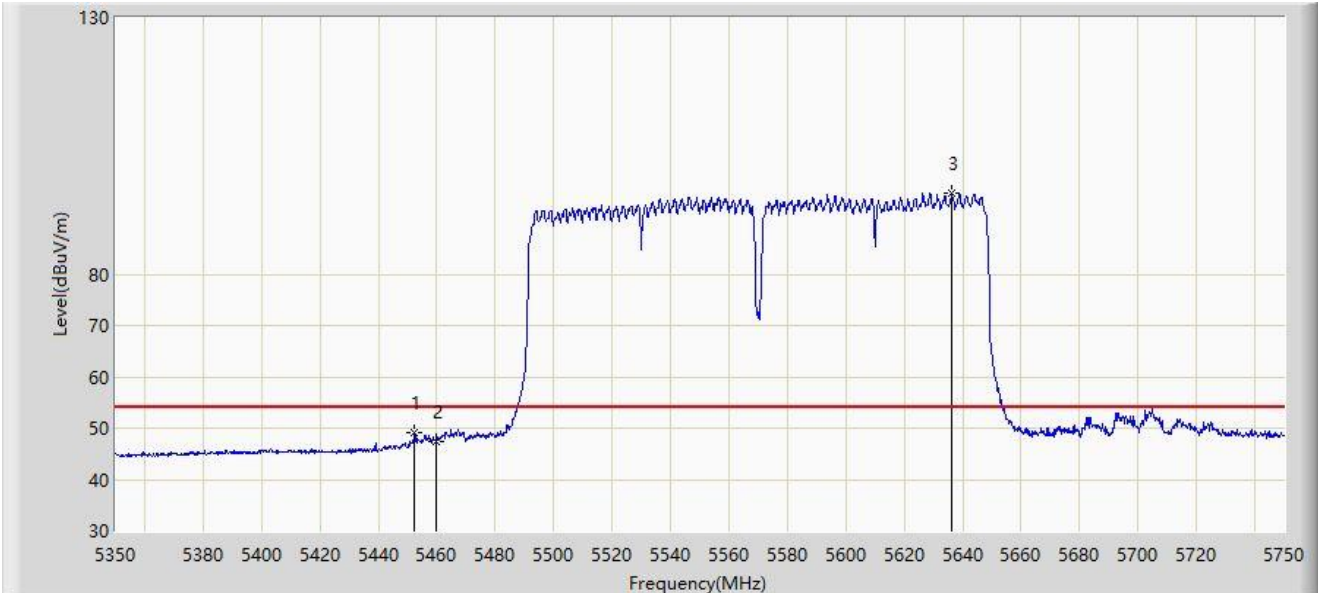


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5452.400	49.235	46.178	-4.765	54.000	3.057	AV
2		5460.000	47.382	44.233	-6.618	54.000	3.149	AV
3		5636.200	95.736	91.632	N/A	N/A	4.103	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

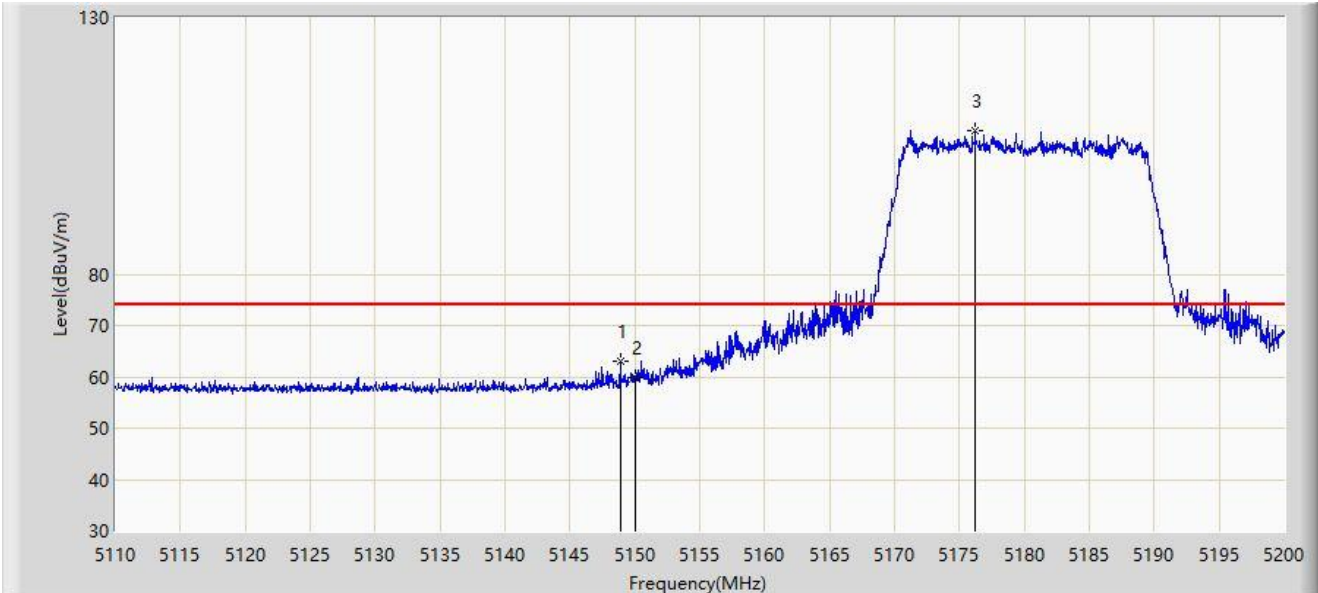


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5148.880	62.940	59.462	-11.060	74.000	3.478	PK
2		5150.000	59.795	56.313	-14.205	74.000	3.482	PK
3		5176.195	108.114	104.768	N/A	N/A	3.346	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

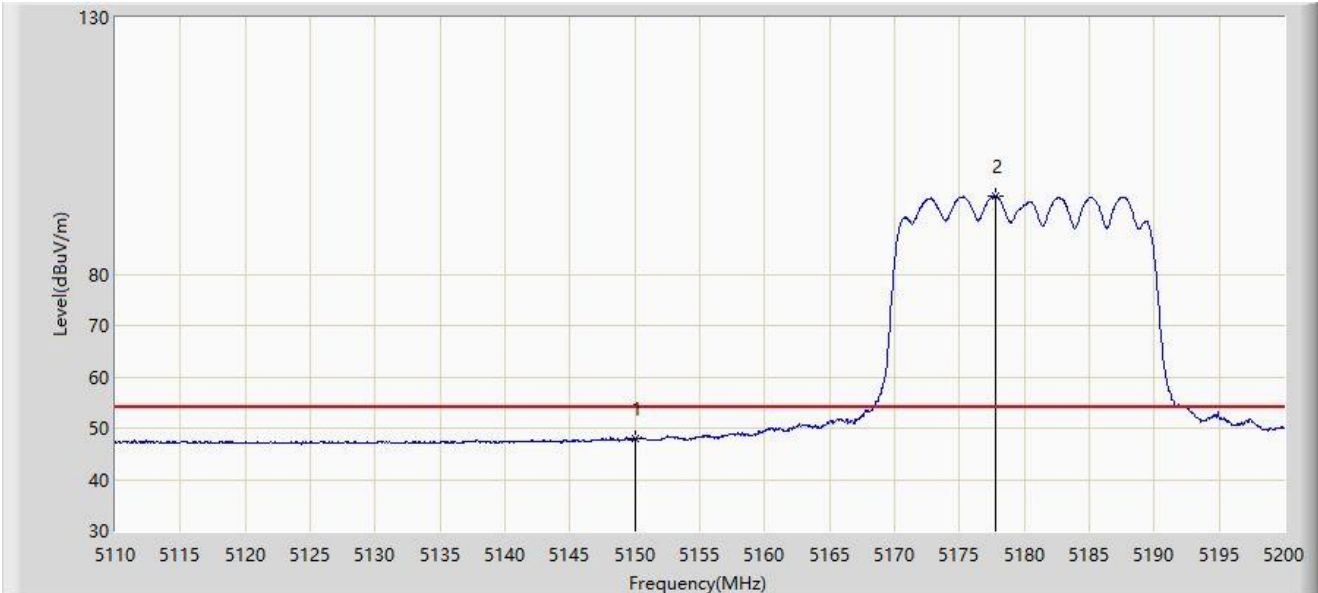


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5150.000	48.108	44.626	-5.892	54.000	3.482	AV
2		5177.815	95.187	91.874	N/A	N/A	3.313	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

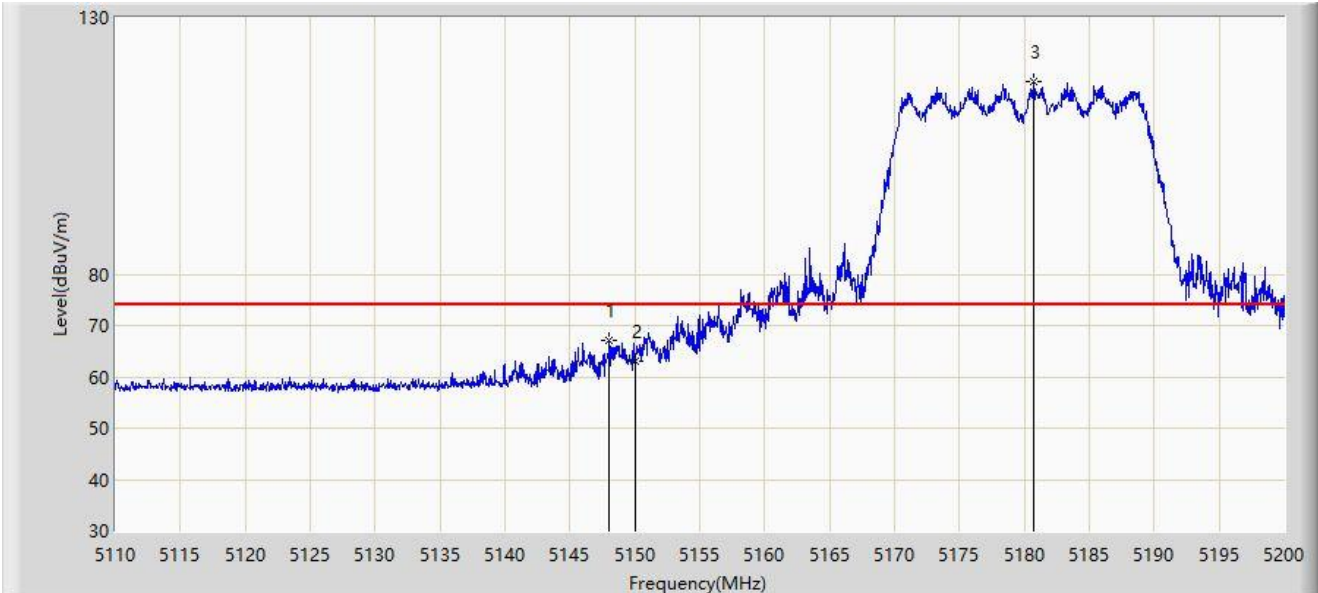


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5148.025	67.075	63.599	-6.925	74.000	3.475	PK
2		5150.000	63.180	59.698	-10.820	74.000	3.482	PK
3		5180.740	117.625	114.370	N/A	N/A	3.255	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

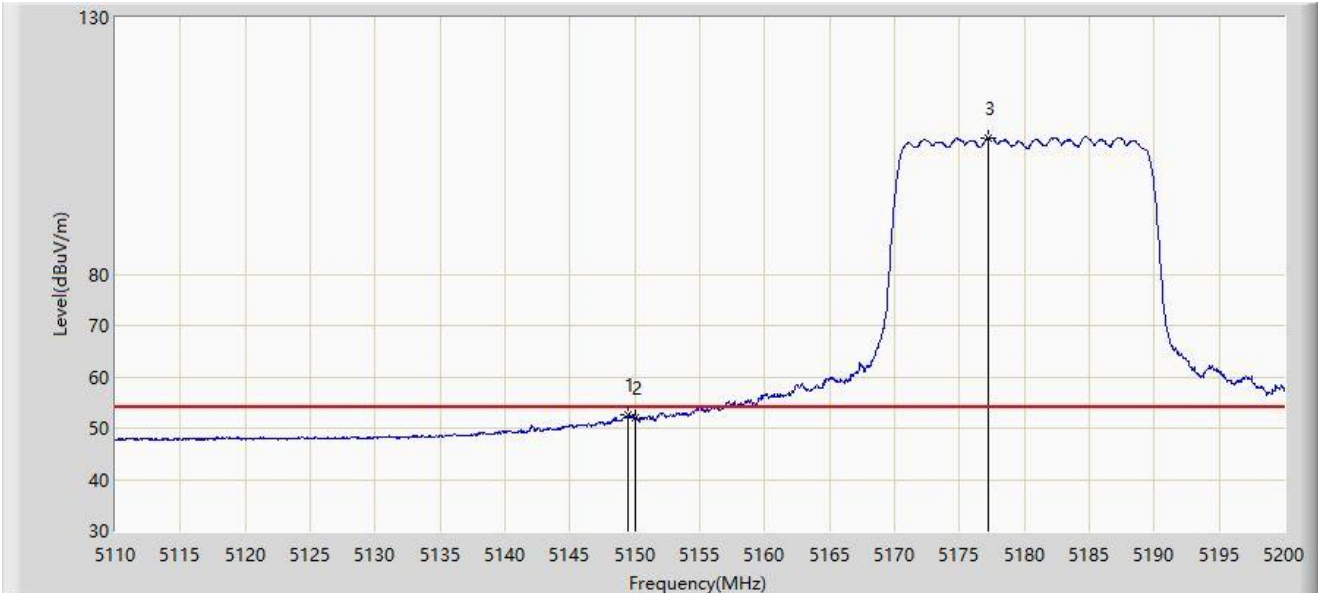


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5149.510	52.548	49.068	-1.452	54.000	3.480	AV
2		5150.000	52.048	48.566	-1.952	54.000	3.482	AV
3		5177.230	106.574	103.249	N/A	N/A	3.325	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

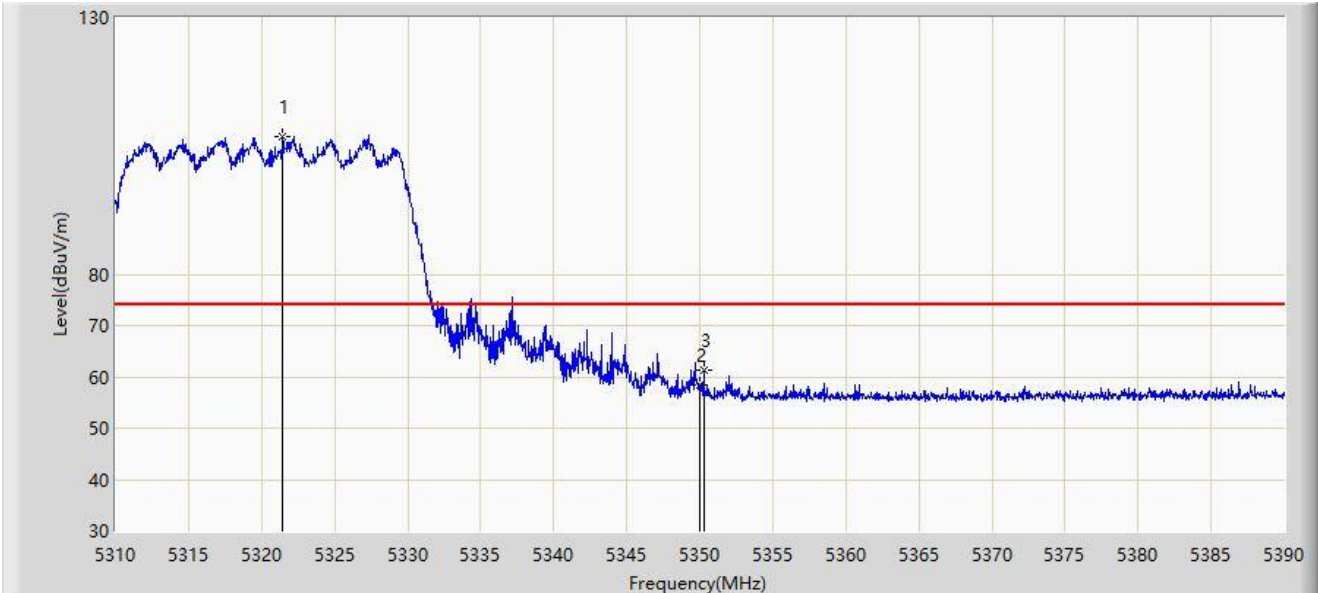


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5321.440	106.727	103.722	N/A	N/A	3.005	PK
2		5350.000	58.434	55.614	-15.566	74.000	2.820	PK
3	*	5350.280	61.405	58.590	-12.595	74.000	2.815	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

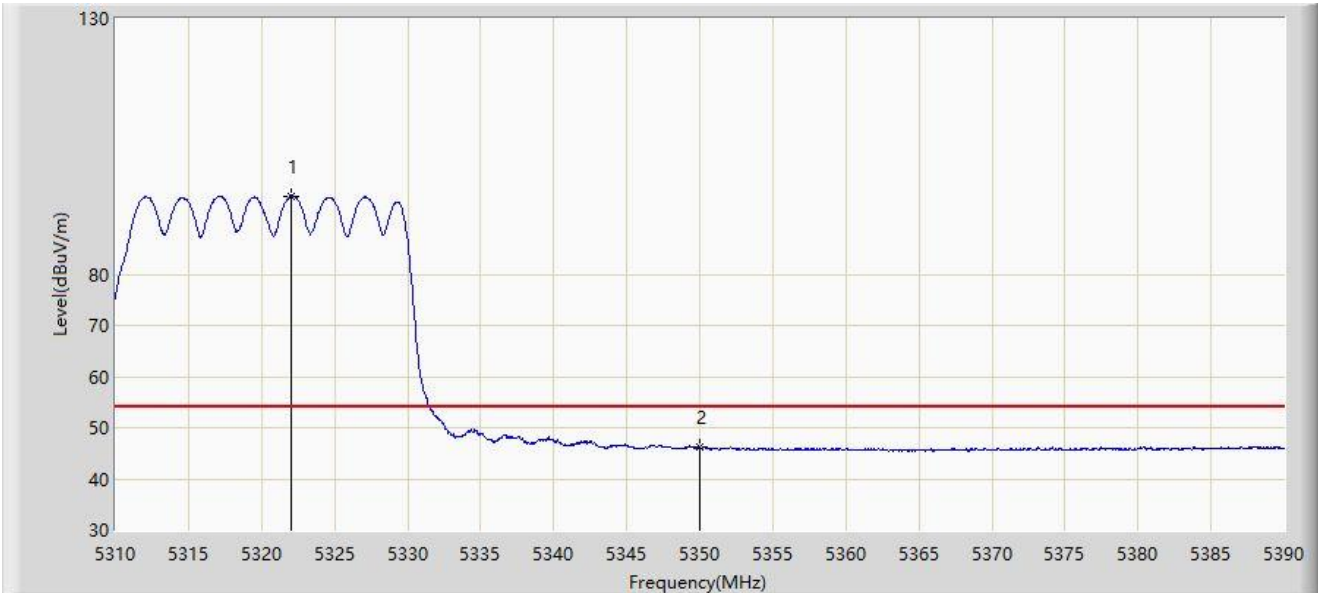

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5322.000	95.250	92.246	N/A	N/A	3.004	AV
2	*	5350.000	46.222	43.402	-7.778	54.000	2.820	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

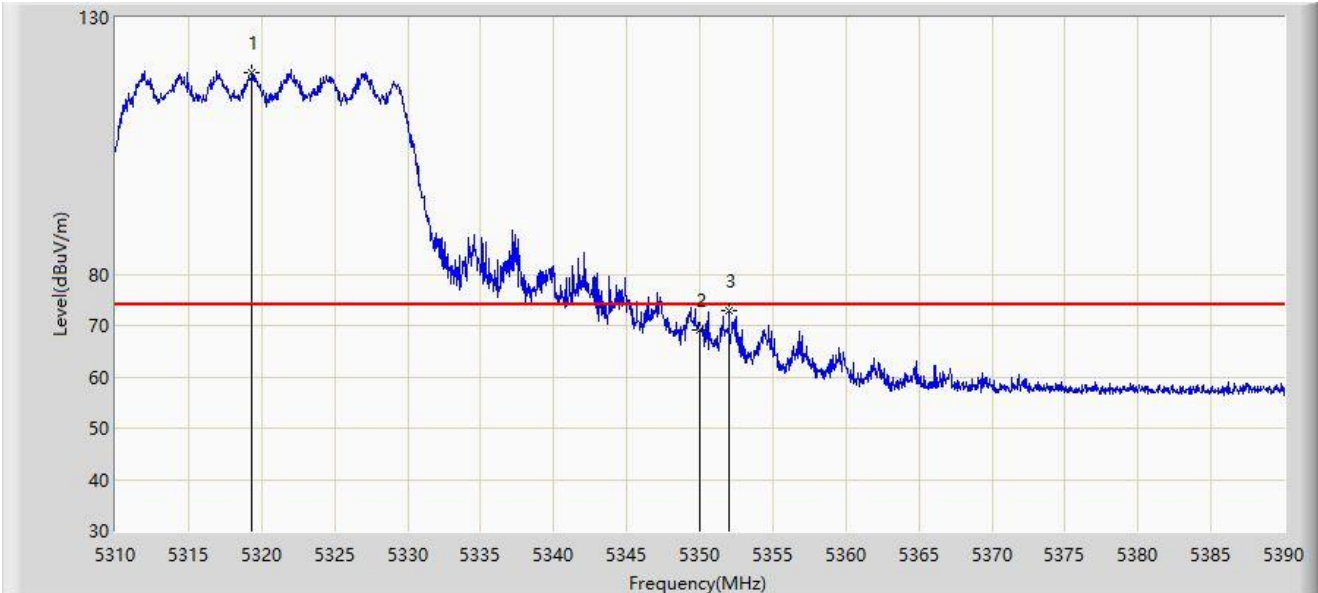


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5319.360	119.398	116.390	N/A	N/A	3.008	PK
2		5350.000	69.122	66.302	-4.878	74.000	2.820	PK
3	*	5352.000	72.808	70.022	-1.192	74.000	2.787	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-30
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

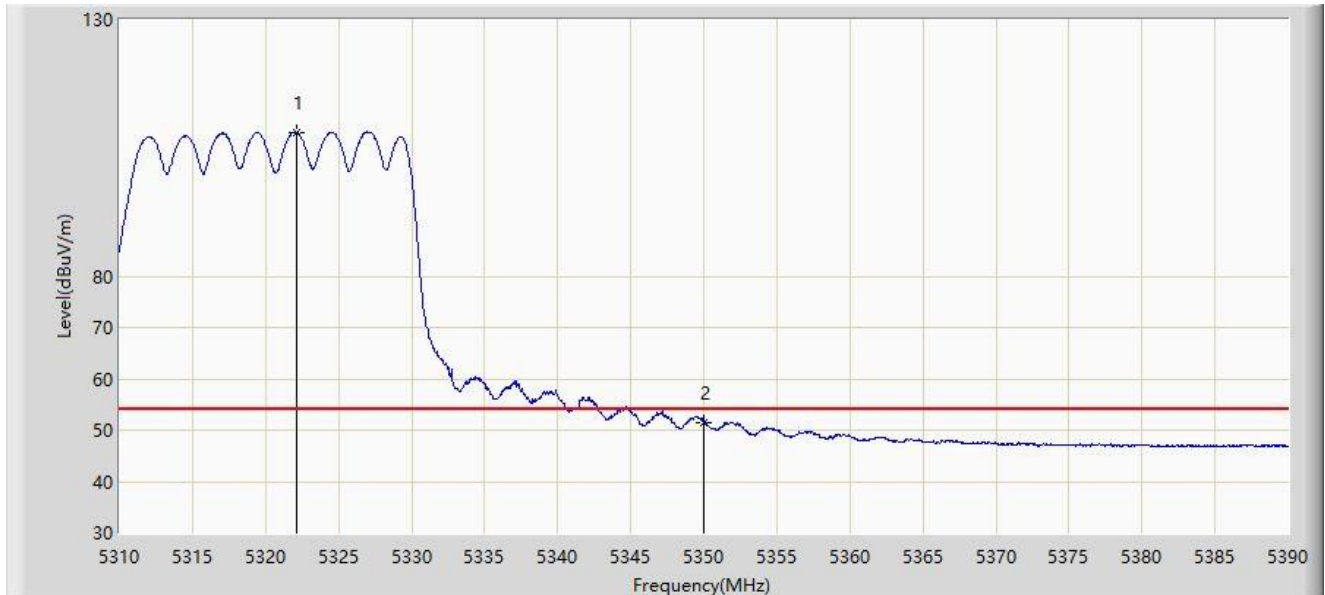


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5322.160	107.934	104.930	N/A	N/A	3.003	AV
2	*	5350.000	51.590	48.770	-2.410	54.000	2.820	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-04
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

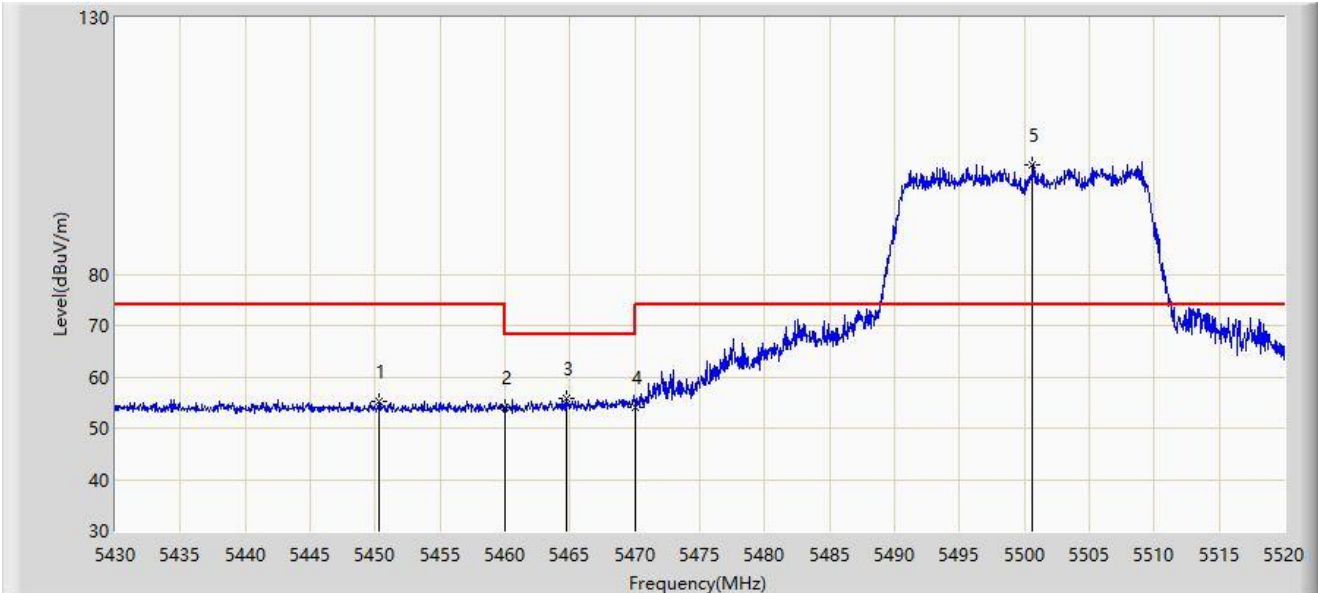


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5450.250	55.290	52.217	-18.710	74.000	3.073	PK
2		5460.000	53.914	50.765	-20.086	74.000	3.149	PK
3	*	5464.695	55.687	52.447	-12.513	68.200	3.240	PK
4		5470.000	54.021	50.679	-14.179	68.200	3.341	PK
5		5500.650	101.220	98.039	N/A	N/A	3.181	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2023-12-04
Limit: FCC_5G_RE(3m)	Engineer: Ajin Fan
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

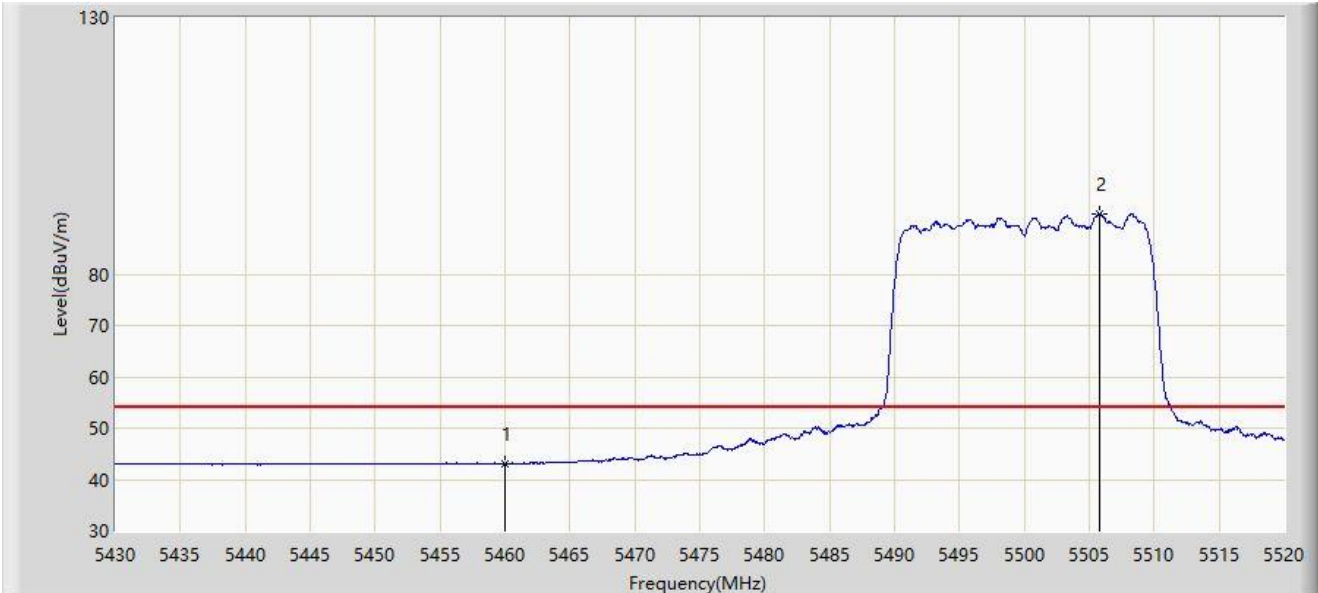

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	43.053	39.904	-10.947	54.000	3.149	AV
2		5505.735	91.648	88.505	N/A	N/A	3.143	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).