


Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

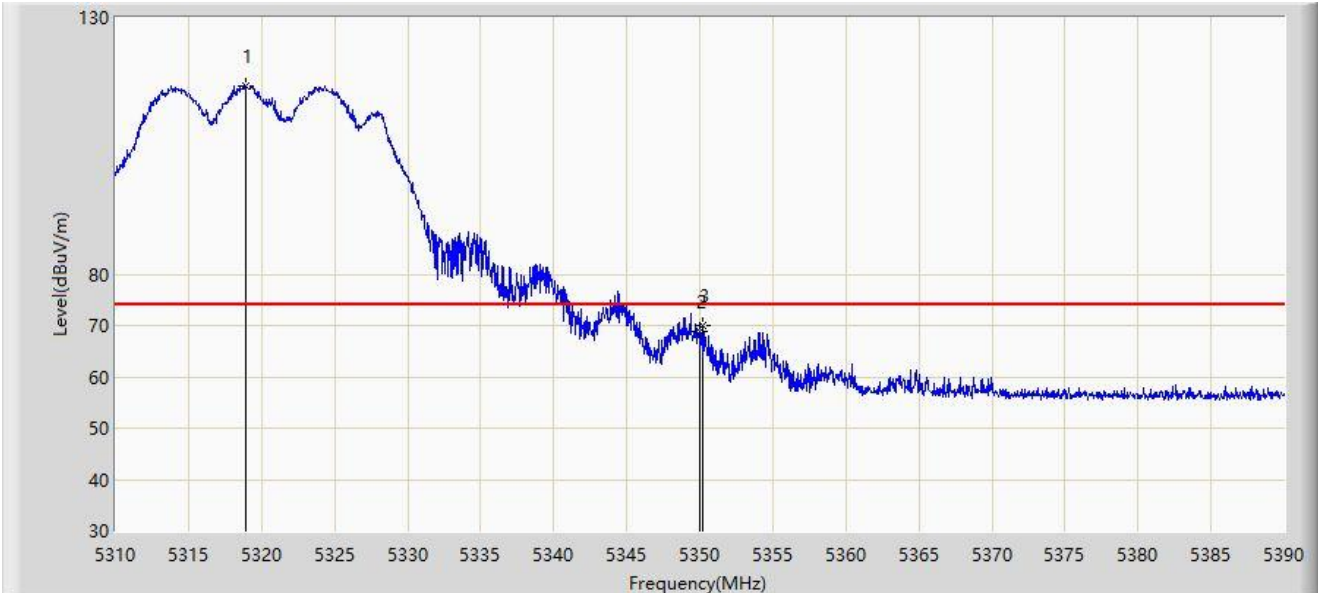


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5318.920	116.639	113.630	N/A	N/A	3.009	PK
2		5350.000	68.769	65.949	-5.231	74.000	2.820	PK
3	*	5350.240	70.079	67.263	-3.921	74.000	2.816	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5320MHz	

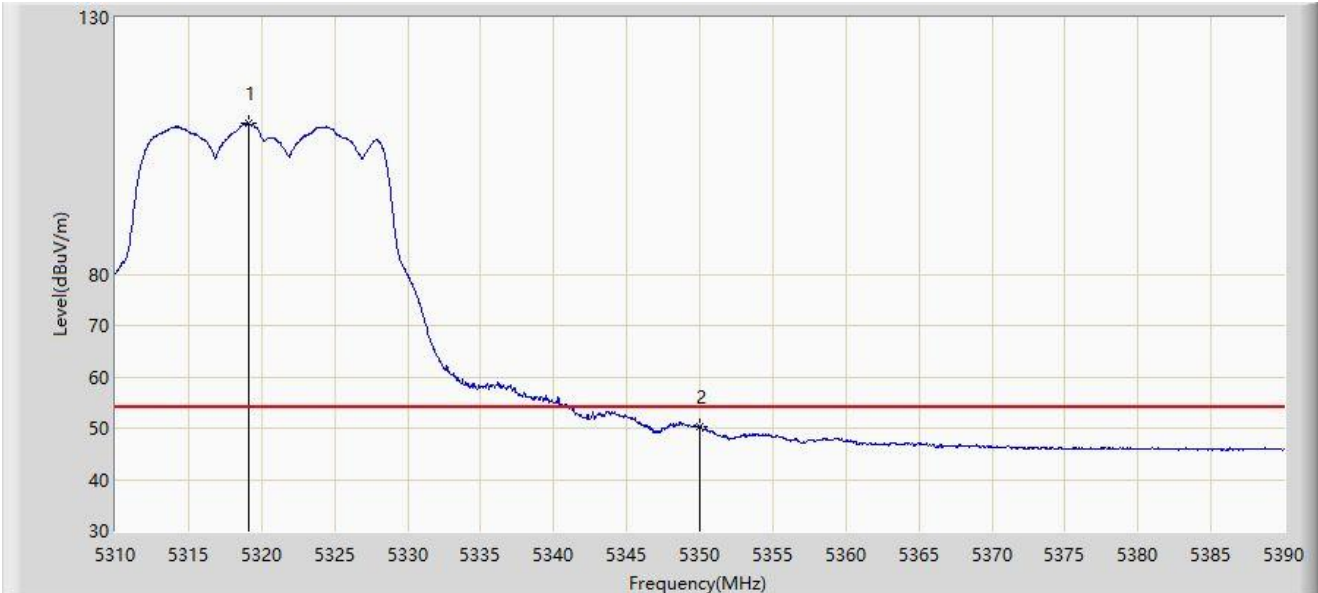


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5319.160	109.407	106.399	N/A	N/A	3.009	AV
2	*	5350.000	50.302	47.482	-3.698	54.000	2.820	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

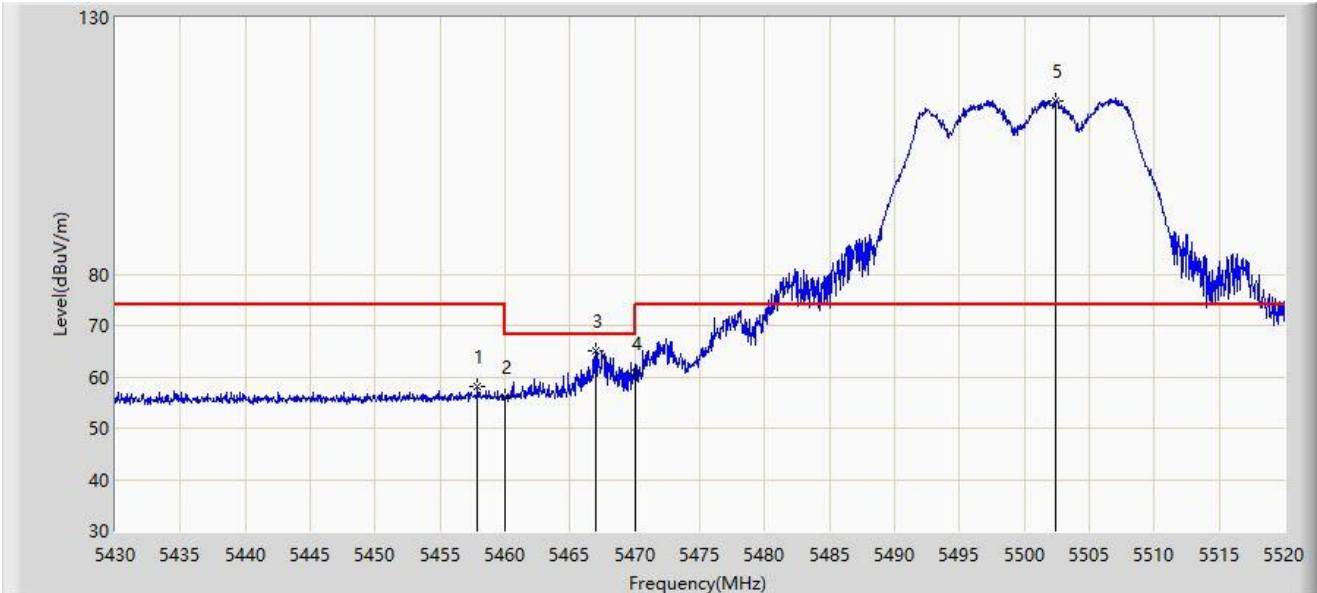

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5457.855	58.247	55.139	-15.753	74.000	3.107	PK
2		5460.000	56.015	52.866	-17.985	74.000	3.149	PK
3	*	5466.945	64.997	61.714	-3.203	68.200	3.283	PK
4		5470.000	60.854	57.512	-7.346	68.200	3.341	PK
5		5502.450	113.803	110.635	N/A	N/A	3.169	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	




No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5460.000	45.432	42.283	-8.568	54.000	3.149	AV
2		5496.060	104.075	100.862	N/A	N/A	3.213	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	

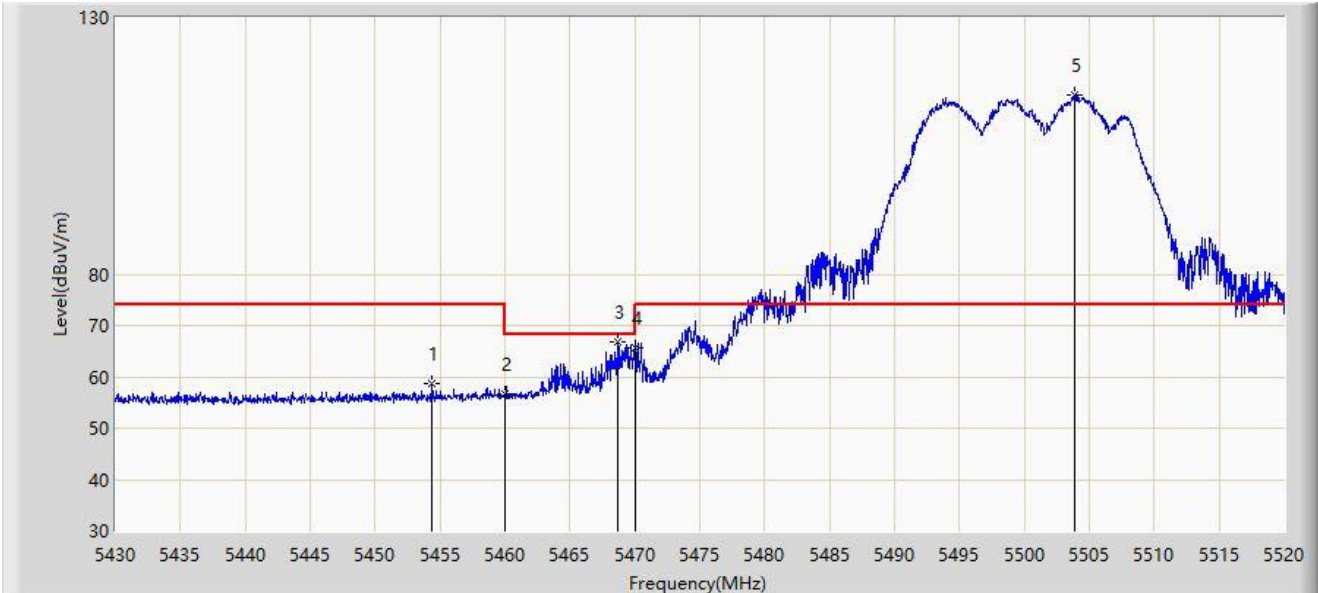

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5454.390	58.590	55.540	-15.410	74.000	3.050	PK
2		5460.000	56.746	53.597	-17.254	74.000	3.149	PK
3	*	5468.655	66.946	63.630	-1.254	68.200	3.316	PK
4		5470.000	65.571	62.229	-2.629	68.200	3.341	PK
5		5503.845	114.906	111.747	N/A	N/A	3.159	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5500MHz	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	46.043	42.894	-7.957	54.000	3.149	AV
2		5498.940	105.967	102.774	N/A	N/A	3.194	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5700MHz	

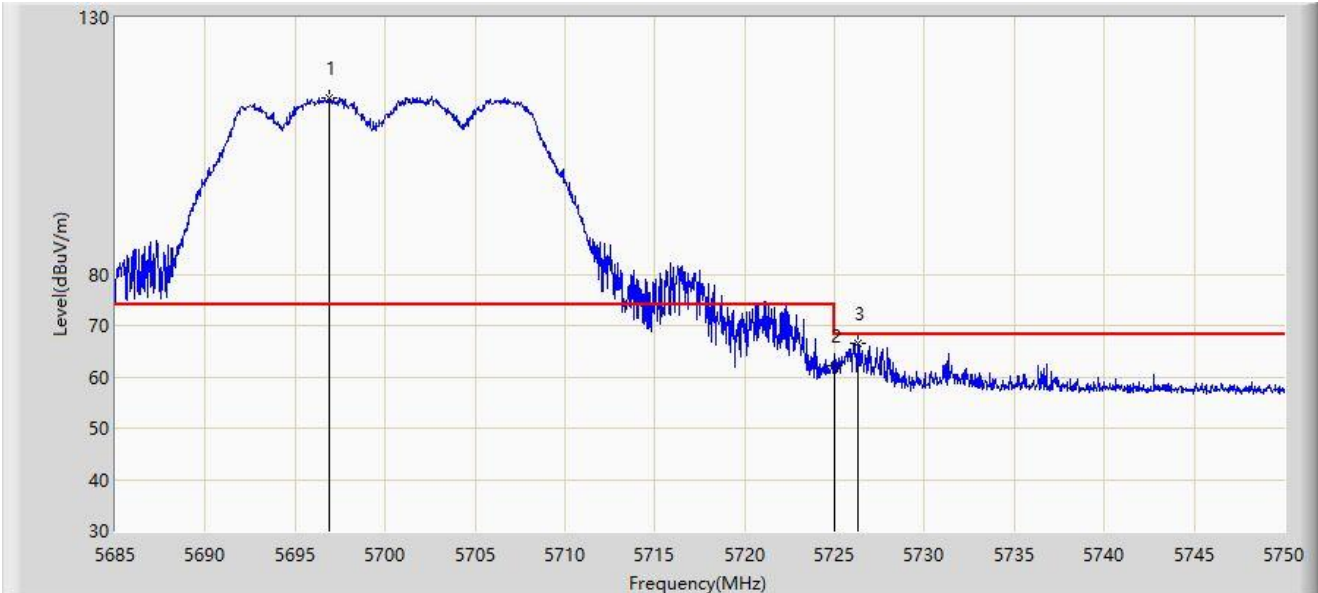


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5696.895	114.410	110.021	N/A	N/A	4.389	PK
2		5725.000	62.051	57.348	-6.149	68.200	4.703	PK
3	*	5726.275	66.545	61.836	-1.655	68.200	4.709	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5700MHz	

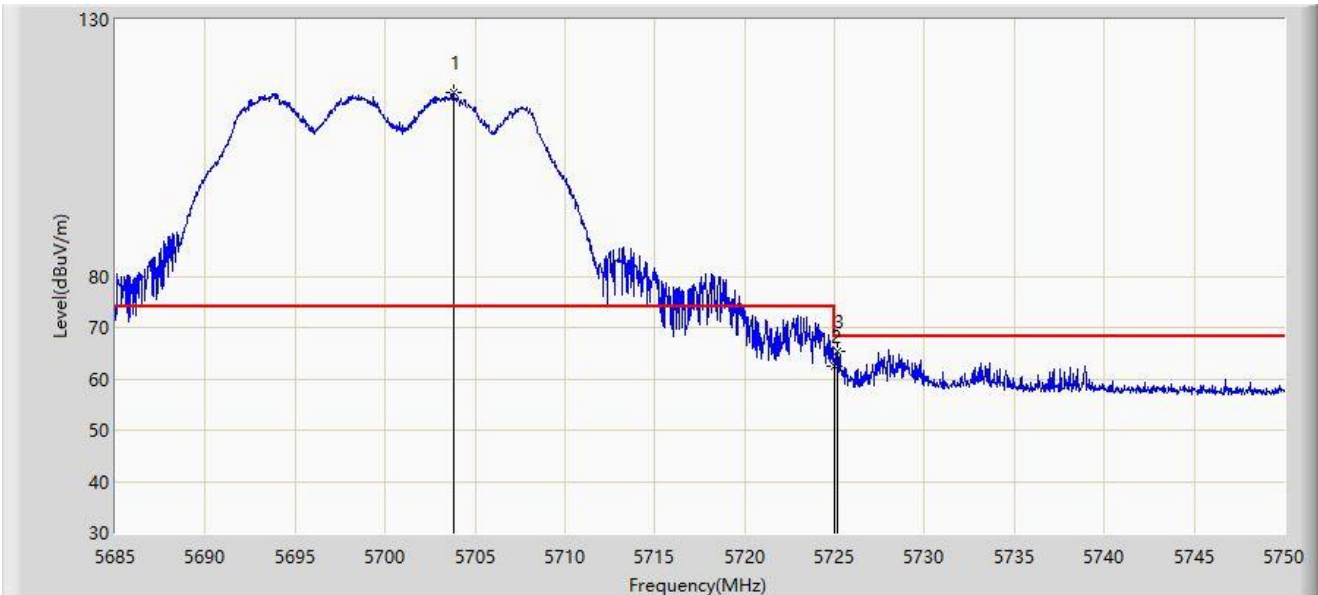


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5703.785	115.681	111.187	N/A	N/A	4.495	PK
2		5725.000	62.602	57.899	-5.598	68.200	4.703	PK
3	*	5725.170	65.457	60.752	-2.743	68.200	4.705	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5745MHz	

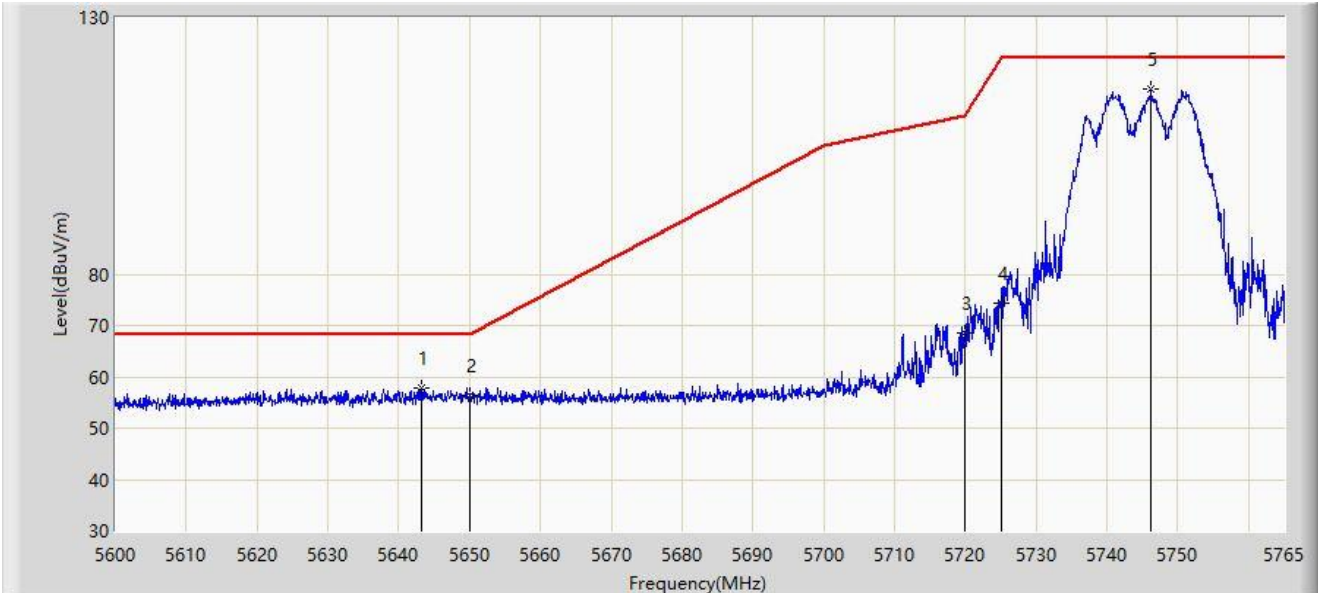


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5643.147	57.894	53.738	-10.306	68.200	4.157	PK
2		5650.000	56.513	52.390	-11.687	68.200	4.122	PK
3		5720.000	68.501	63.837	-42.299	110.800	4.663	PK
4		5725.000	74.486	69.783	-47.714	122.200	4.703	PK
5		5746.190	115.991	111.556	N/A	N/A	4.435	PK
6		57000.000	70.665	42.648	NaN	NaN	28.016	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5745MHz	

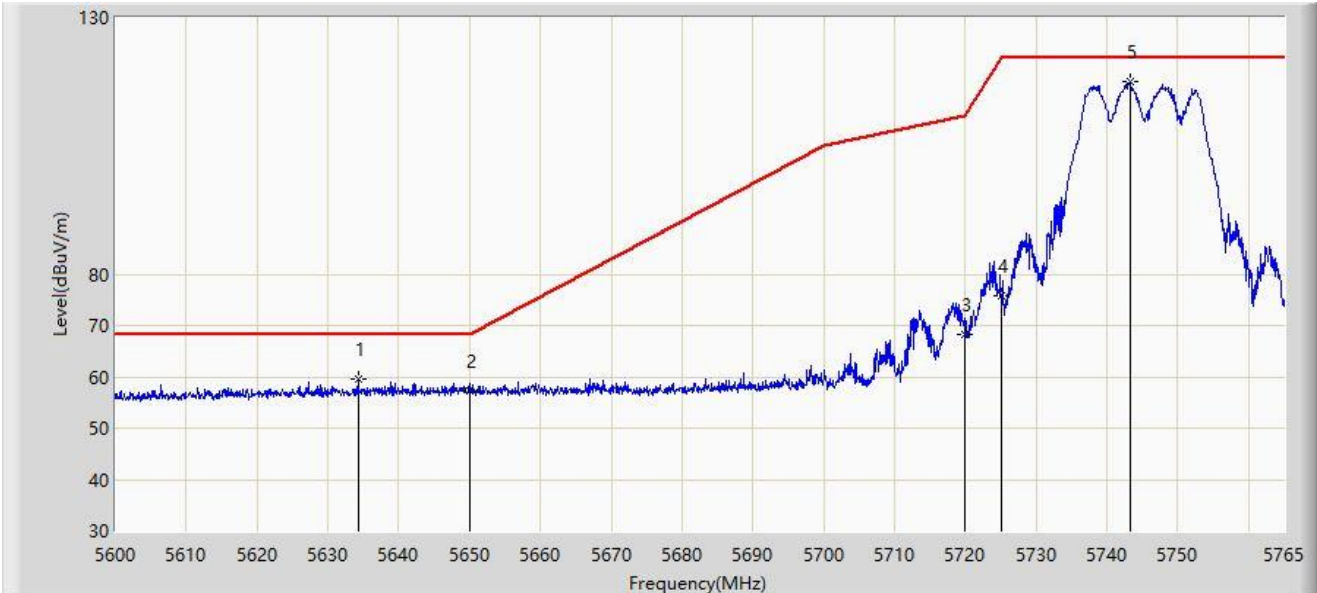


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5634.237	59.624	55.544	-8.576	68.200	4.080	PK
2		5650.000	57.110	52.987	-11.090	68.200	4.122	PK
3		5720.000	68.150	63.486	-42.650	110.800	4.663	PK
4		5725.000	75.703	71.000	-46.497	122.200	4.703	PK
5		5743.220	117.530	113.116	N/A	N/A	4.414	PK
6		57000.000	73.842	45.825	NaN	NaN	28.016	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5825MHz	

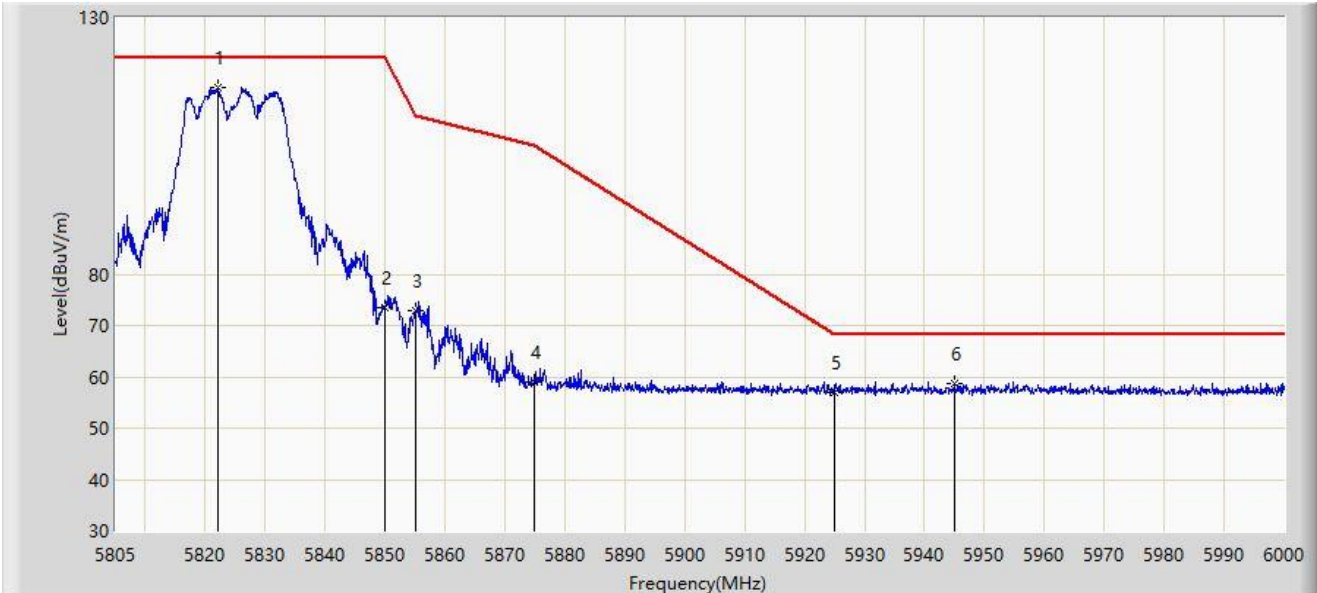


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5822.160	116.282	111.384	N/A	N/A	4.898	PK
2		5850.000	73.395	68.412	-48.805	122.200	4.984	PK
3		5855.000	72.763	67.725	-38.037	110.800	5.038	PK
4		5875.000	59.112	53.981	-46.088	105.200	5.131	PK
5		5925.000	56.999	51.764	-11.201	68.200	5.236	PK
6	*	5945.107	58.629	53.304	-9.571	68.200	5.326	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5825MHz	

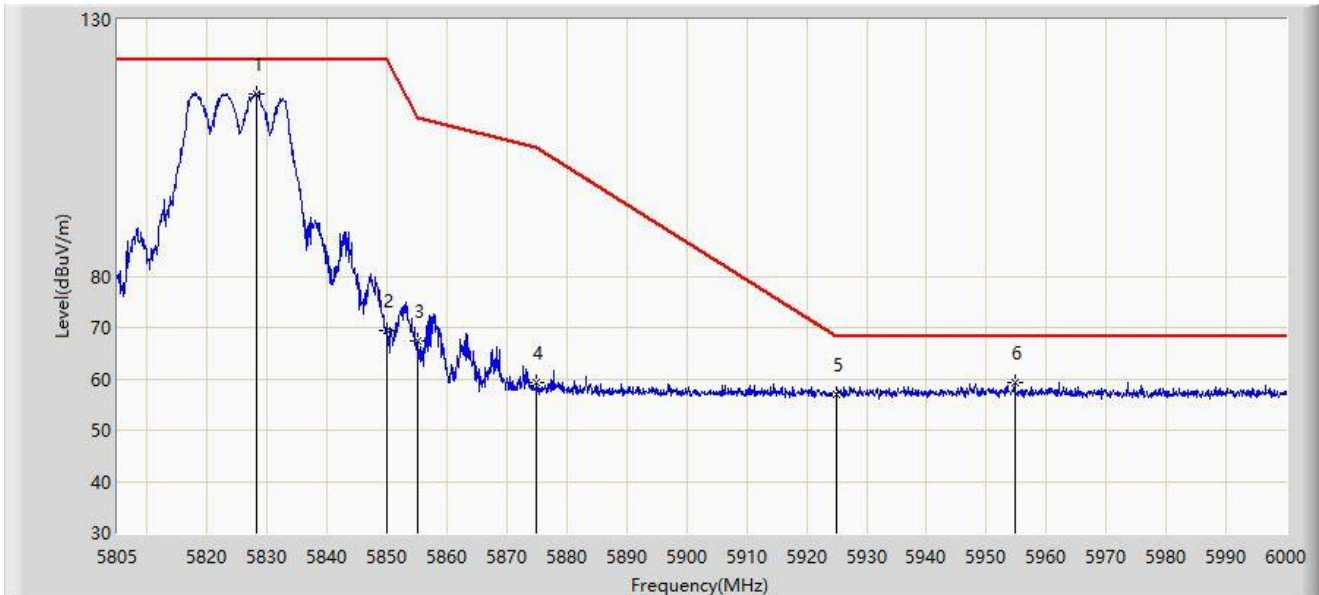


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5828.205	115.596	110.763	N/A	N/A	4.832	PK
2		5850.000	69.364	64.381	-52.836	122.200	4.984	PK
3		5855.000	67.290	62.252	-43.510	110.800	5.038	PK
4		5875.000	59.211	54.080	-45.989	105.200	5.131	PK
5		5925.000	56.980	51.745	-11.220	68.200	5.236	PK
6	*	5954.760	59.134	53.760	-9.066	68.200	5.374	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

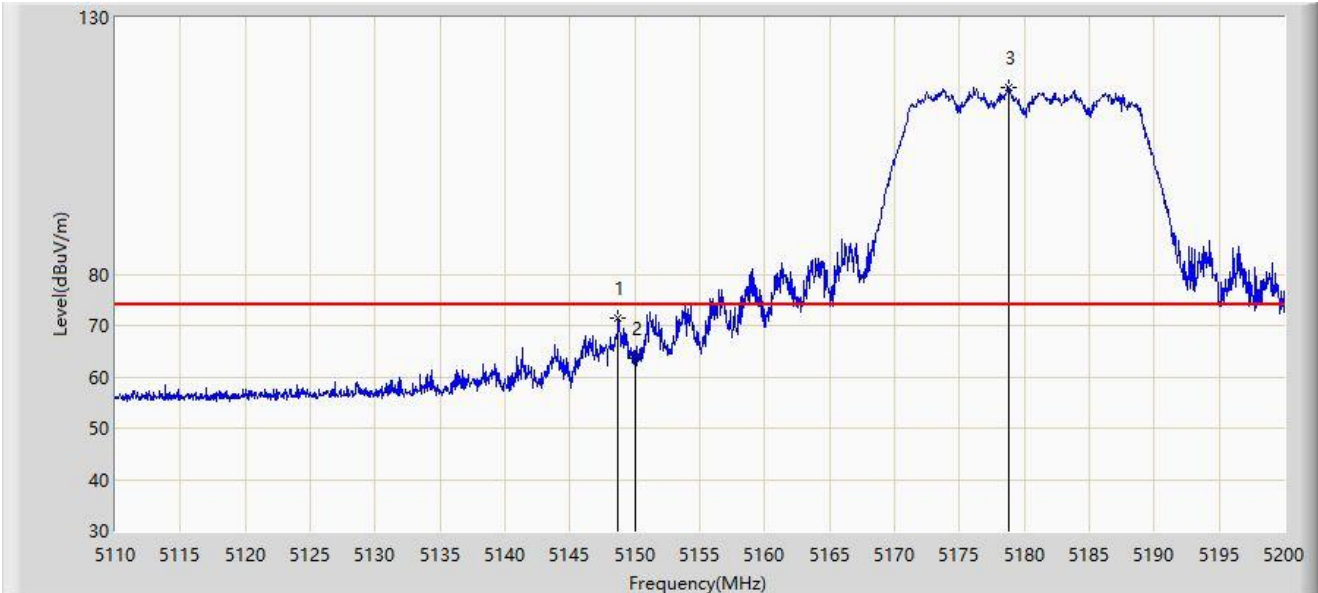

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.700	71.329	67.851	-2.671	74.000	3.478	PK
2		5150.000	63.577	60.095	-10.423	74.000	3.482	PK
3		5178.805	116.476	113.182	N/A	N/A	3.294	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.565	48.812	45.335	-5.188	54.000	3.477	AV
2		5150.000	48.071	44.589	-5.929	54.000	3.482	AV
3		5178.400	105.185	101.883	N/A	N/A	3.302	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

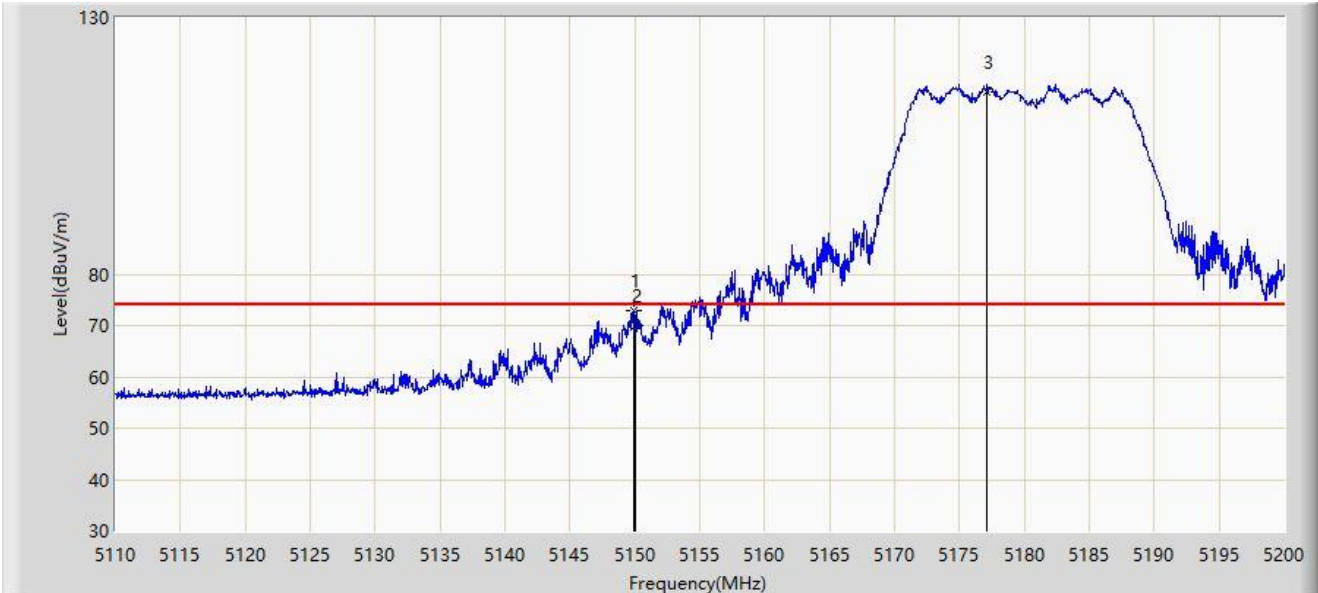


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.960	72.762	69.281	-1.238	74.000	3.482	PK
2		5150.000	69.879	66.397	-4.121	74.000	3.482	PK
3		5177.140	115.580	112.253	N/A	N/A	3.327	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz	

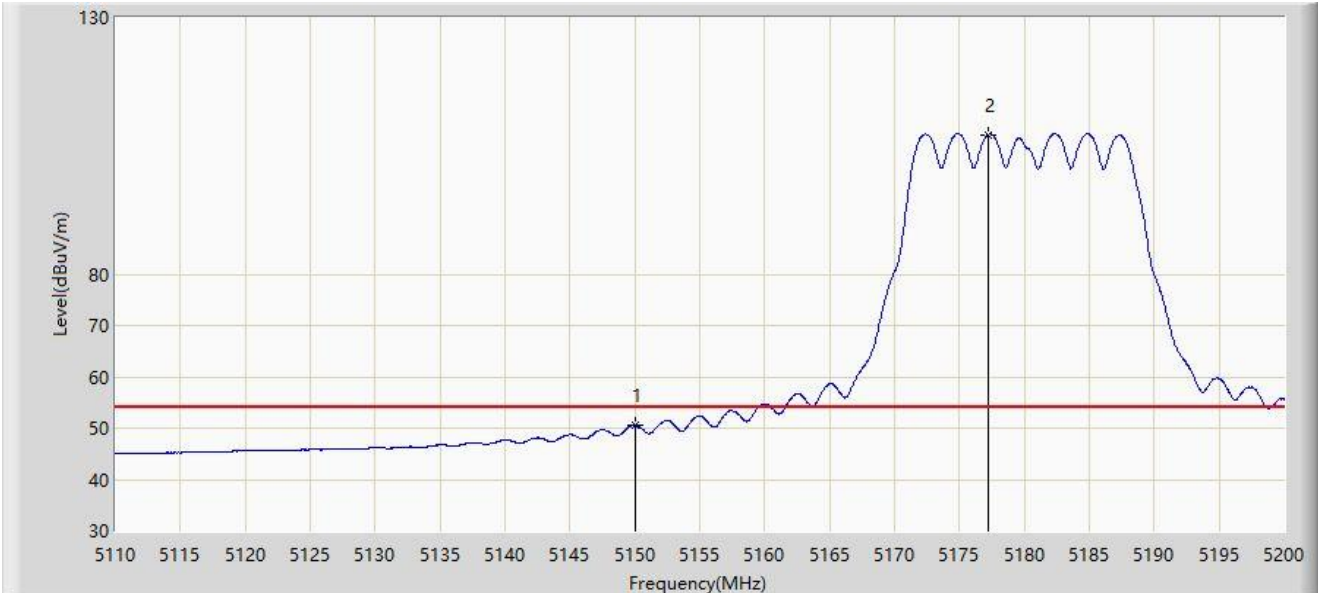


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5150.000	50.575	47.093	-3.425	54.000	3.482	AV
2		5177.185	107.190	103.864	N/A	N/A	3.325	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

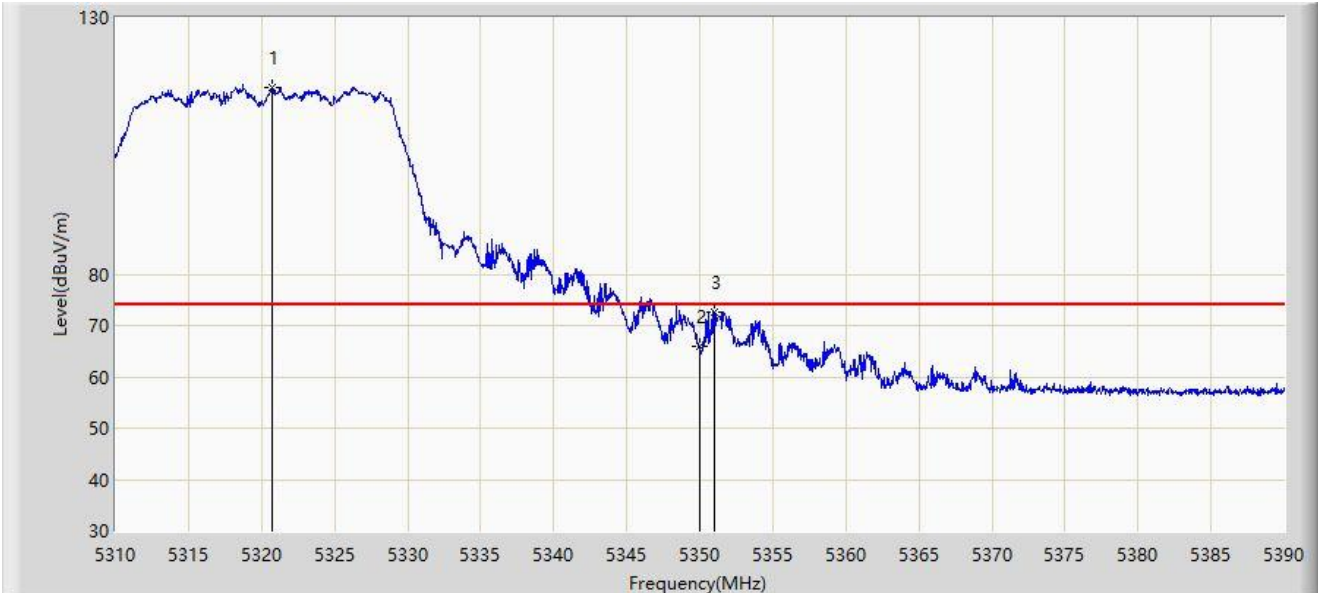

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5320.680	116.515	113.509	N/A	N/A	3.006	PK
2		5350.000	66.068	63.248	-7.932	74.000	2.820	PK
3	*	5351.000	72.625	69.822	-1.375	74.000	2.802	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5323.280	105.371	102.369	N/A	N/A	3.001	AV
2	*	5350.000	48.287	45.467	-5.713	54.000	2.820	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

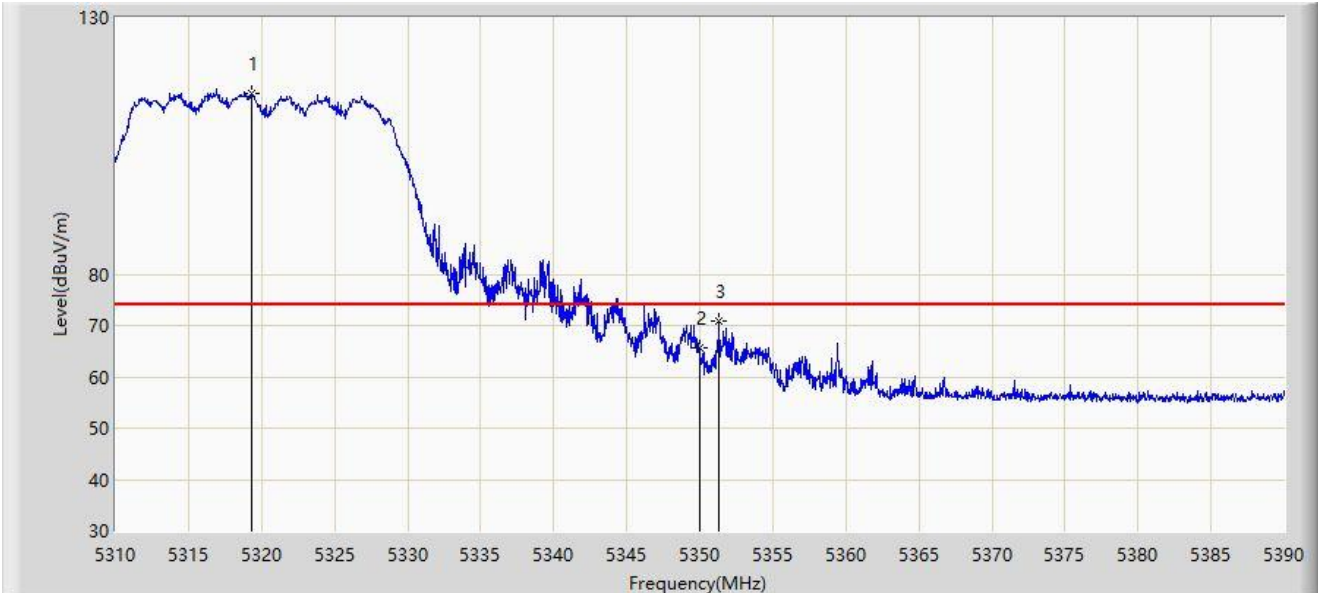


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5319.360	115.258	112.250	N/A	N/A	3.008	PK
2		5350.000	65.546	62.726	-8.454	74.000	2.820	PK
3	*	5351.320	70.909	68.111	-3.091	74.000	2.798	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz	

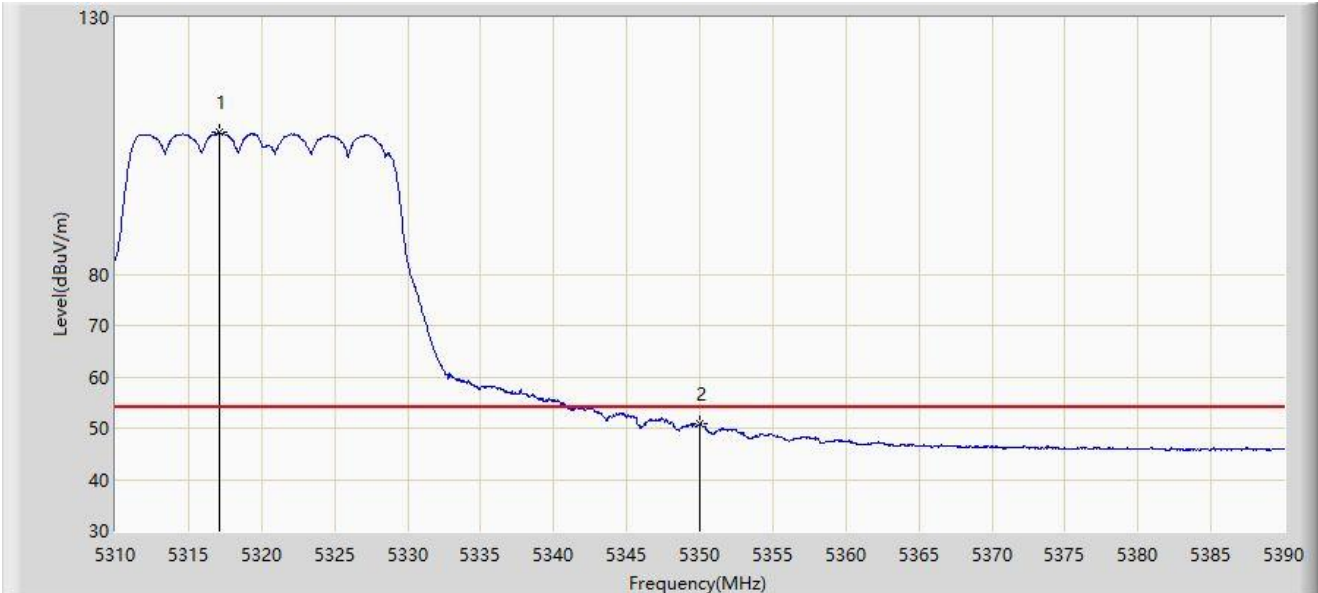


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5317.160	107.593	104.598	N/A	N/A	2.996	AV
2	*	5350.000	50.959	48.139	-3.041	54.000	2.820	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

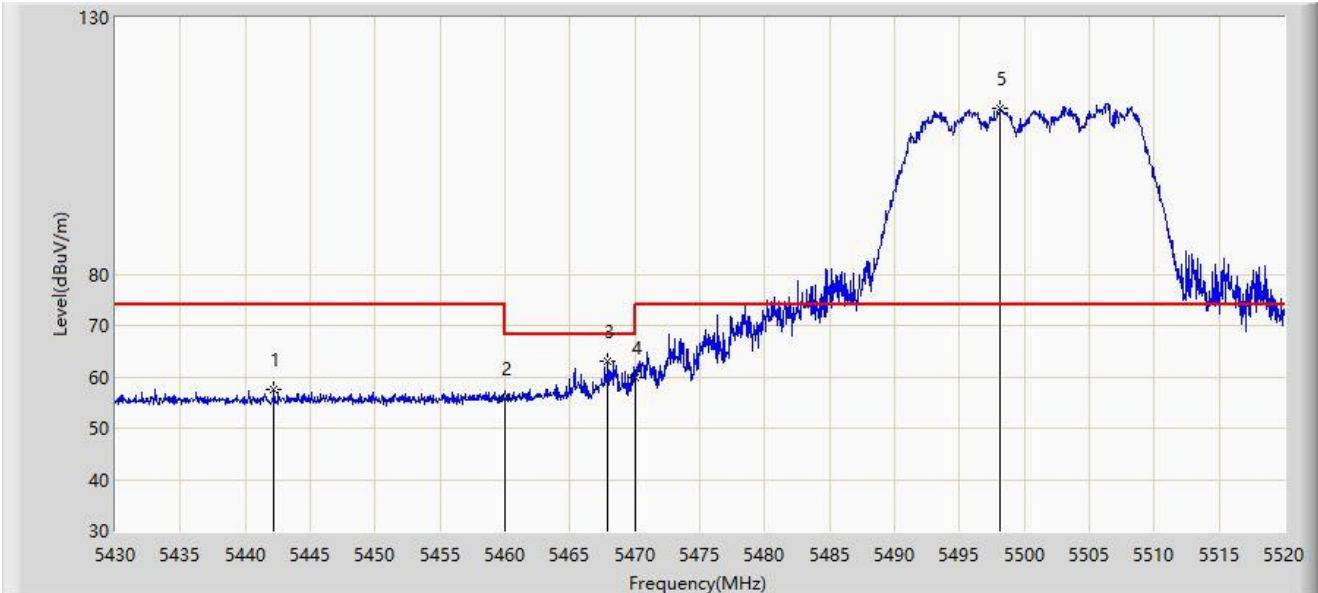


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5442.195	57.499	54.365	-16.501	74.000	3.135	PK
2		5460.000	55.781	52.632	-18.219	74.000	3.149	PK
3	*	5467.890	63.187	59.886	-5.013	68.200	3.301	PK
4		5470.000	59.822	56.480	-8.378	68.200	3.341	PK
5		5498.175	112.193	108.995	N/A	N/A	3.198	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

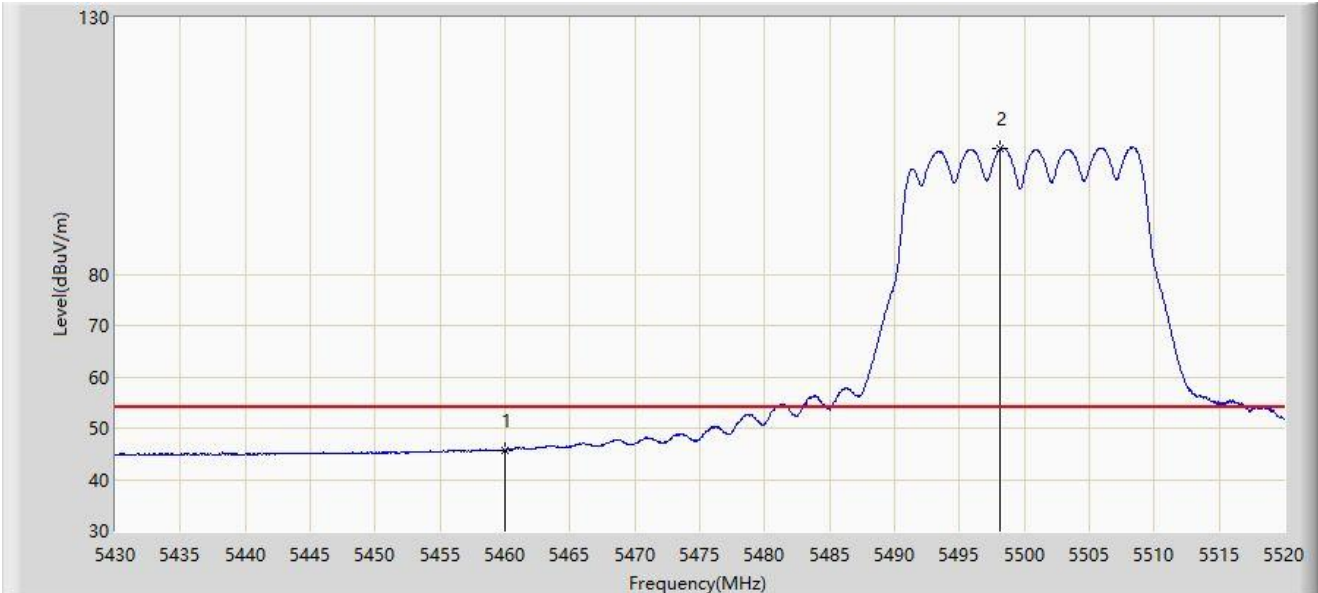


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	45.784	42.635	-8.216	54.000	3.149	AV
2		5498.175	104.392	101.194	N/A	N/A	3.198	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	

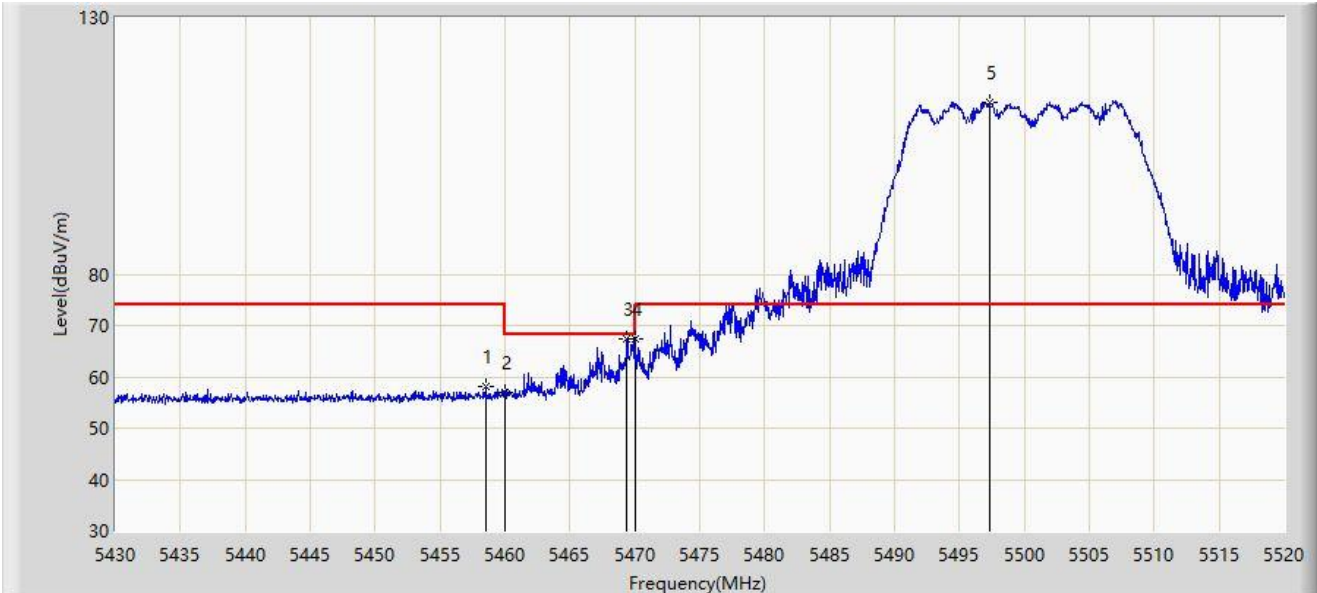

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5458.530	58.250	55.129	-15.750	74.000	3.120	PK
2		5460.000	56.892	53.743	-17.108	74.000	3.149	PK
3		5469.375	67.284	63.954	-0.916	68.200	3.330	PK
4	*	5470.000	67.360	64.018	-0.840	68.200	3.341	PK
5		5497.320	113.528	110.324	N/A	N/A	3.204	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	45.253	42.104	-8.747	54.000	3.149	AV
2		5501.460	102.855	99.680	N/A	N/A	3.175	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

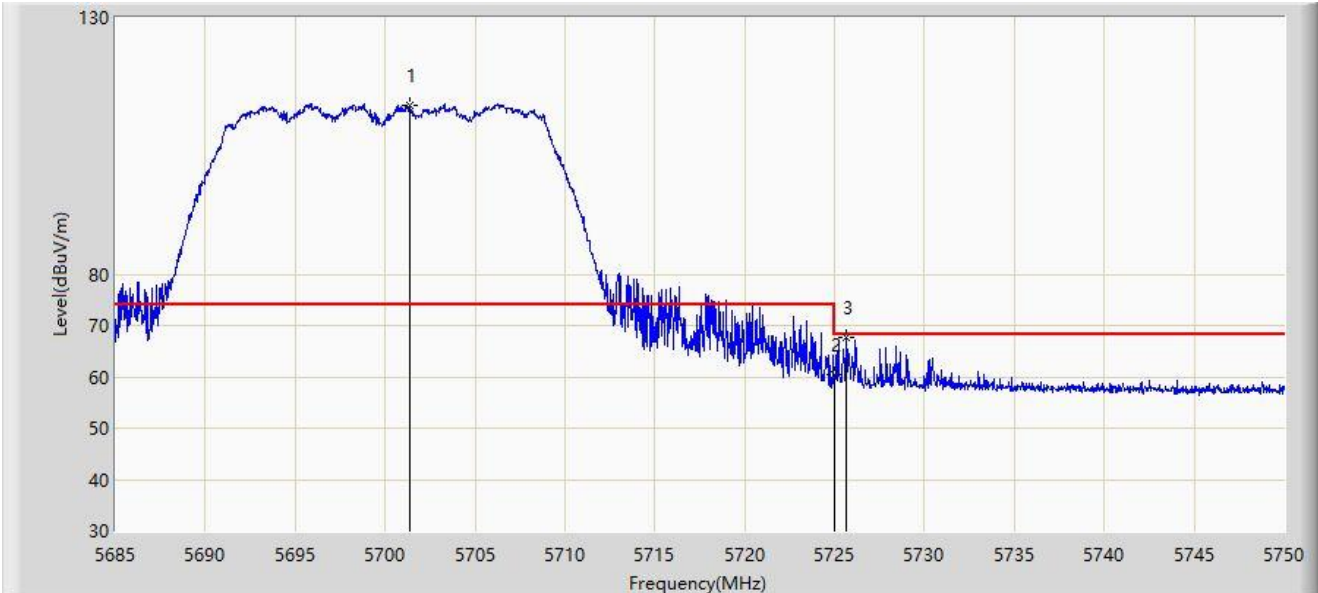


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5701.380	112.840	108.382	N/A	N/A	4.458	PK
2		5725.000	60.291	55.588	-7.909	68.200	4.703	PK
3	*	5725.625	67.658	62.950	-0.542	68.200	4.708	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz	

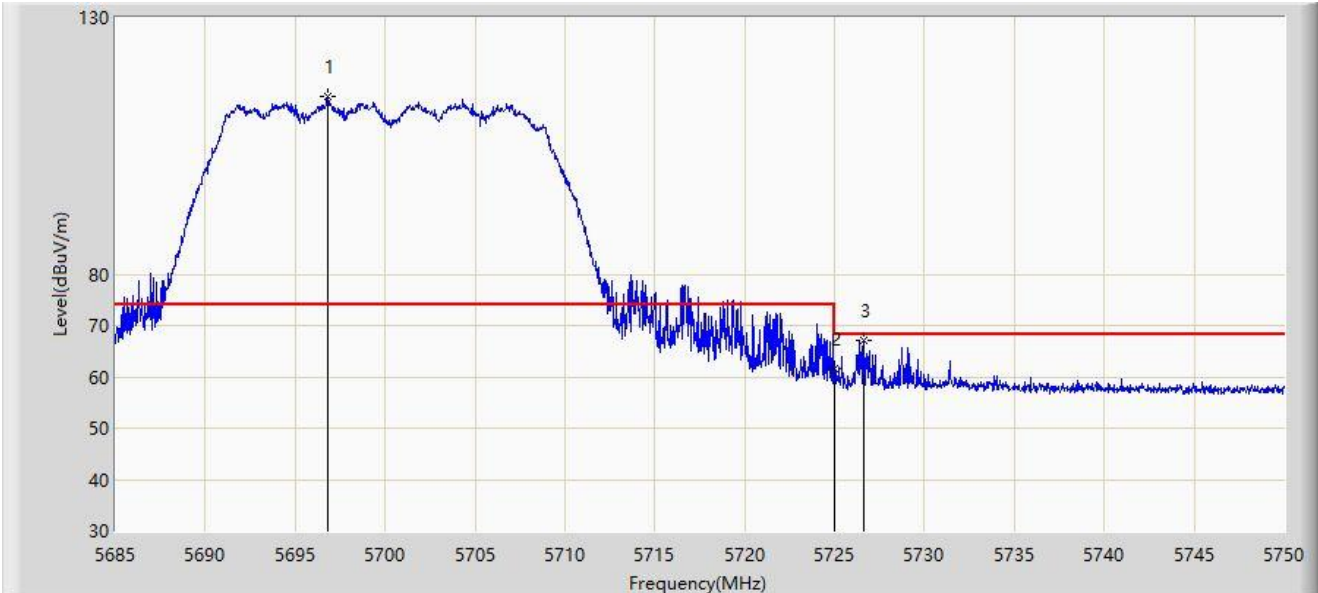


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5696.797	114.526	110.138	N/A	N/A	4.388	PK
2		5725.000	61.530	56.827	-6.670	68.200	4.703	PK
3	*	5726.600	67.147	62.443	-1.053	68.200	4.704	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

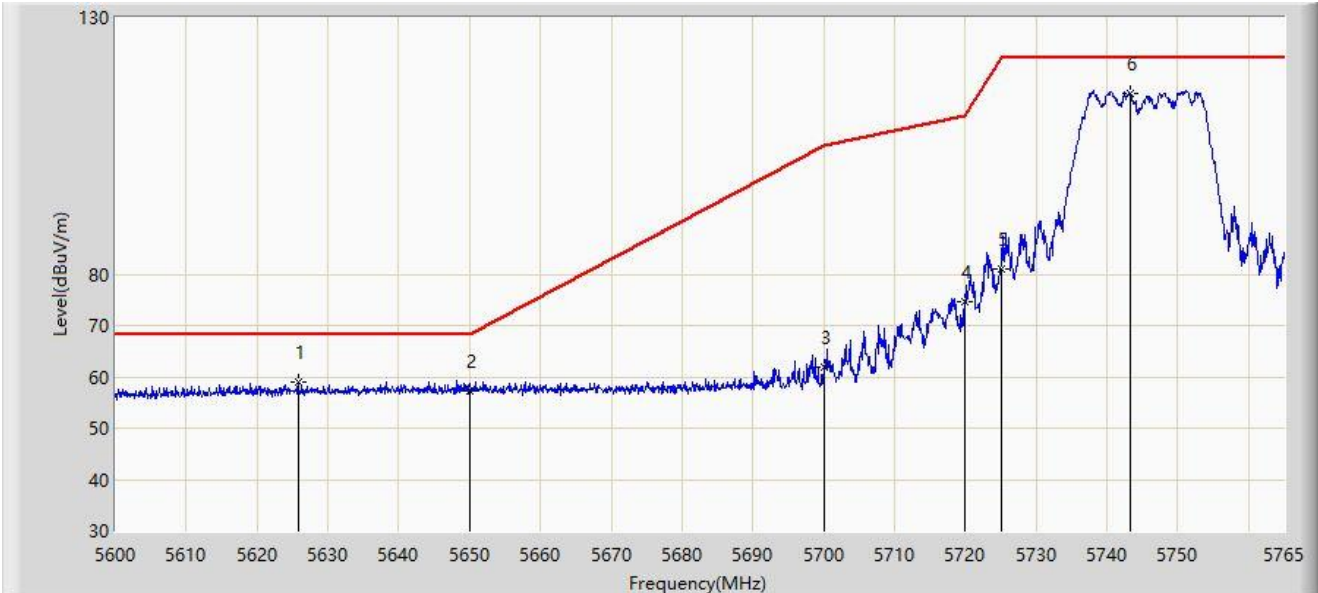


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5625.822	58.918	54.940	-9.282	68.200	3.978	PK
2		5650.000	57.226	53.103	-10.974	68.200	4.122	PK
3		5700.000	61.976	57.539	-43.224	105.200	4.437	PK
4		5720.000	74.693	70.029	-36.107	110.800	4.663	PK
5		5725.000	81.089	76.386	-41.111	122.200	4.703	PK
6		5743.220	115.272	110.858	N/A	N/A	4.414	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz	

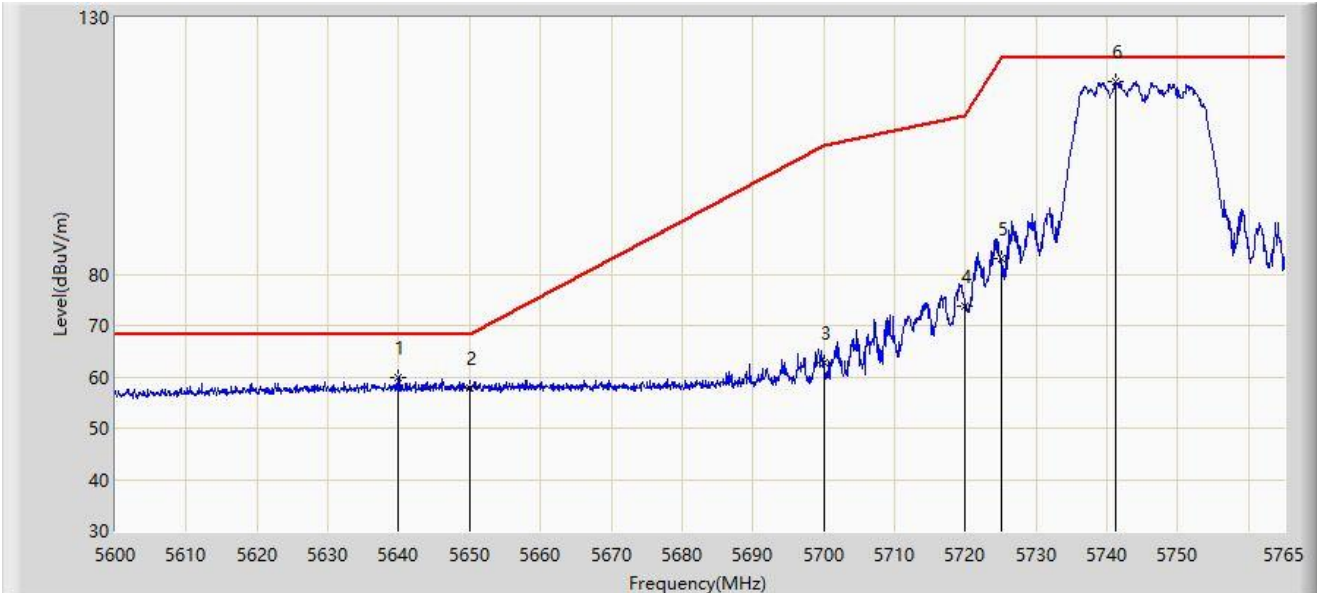


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5639.848	59.827	55.676	-8.373	68.200	4.152	PK
2		5650.000	57.876	53.753	-10.324	68.200	4.122	PK
3		5700.000	62.779	58.342	-42.421	105.200	4.437	PK
4		5720.000	73.913	69.249	-36.887	110.800	4.663	PK
5		5725.000	83.012	78.309	-39.188	122.200	4.703	PK
6		5741.158	117.480	113.033	N/A	N/A	4.446	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

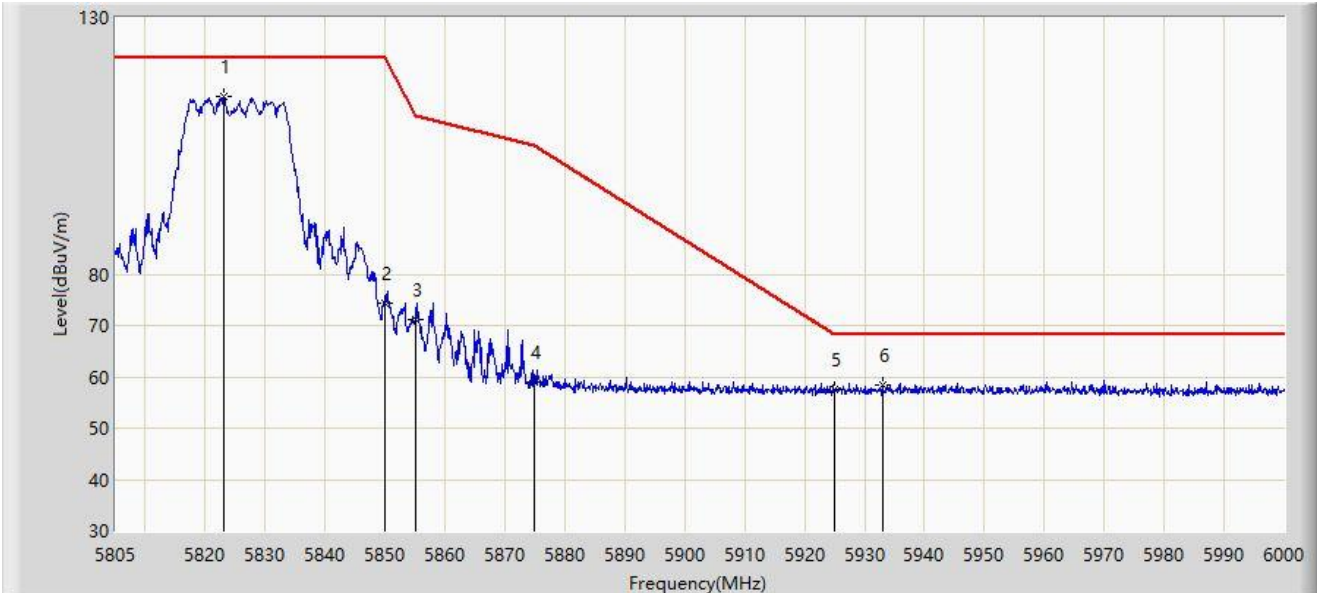


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5823.038	114.664	109.776	N/A	N/A	4.888	PK
2		5850.000	74.385	69.402	-47.815	122.200	4.984	PK
3		5855.000	71.263	66.225	-39.537	110.800	5.038	PK
4		5875.000	58.907	53.776	-46.293	105.200	5.131	PK
5		5925.000	57.398	52.163	-10.802	68.200	5.236	PK
6	*	5933.018	58.437	53.165	-9.763	68.200	5.272	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz	

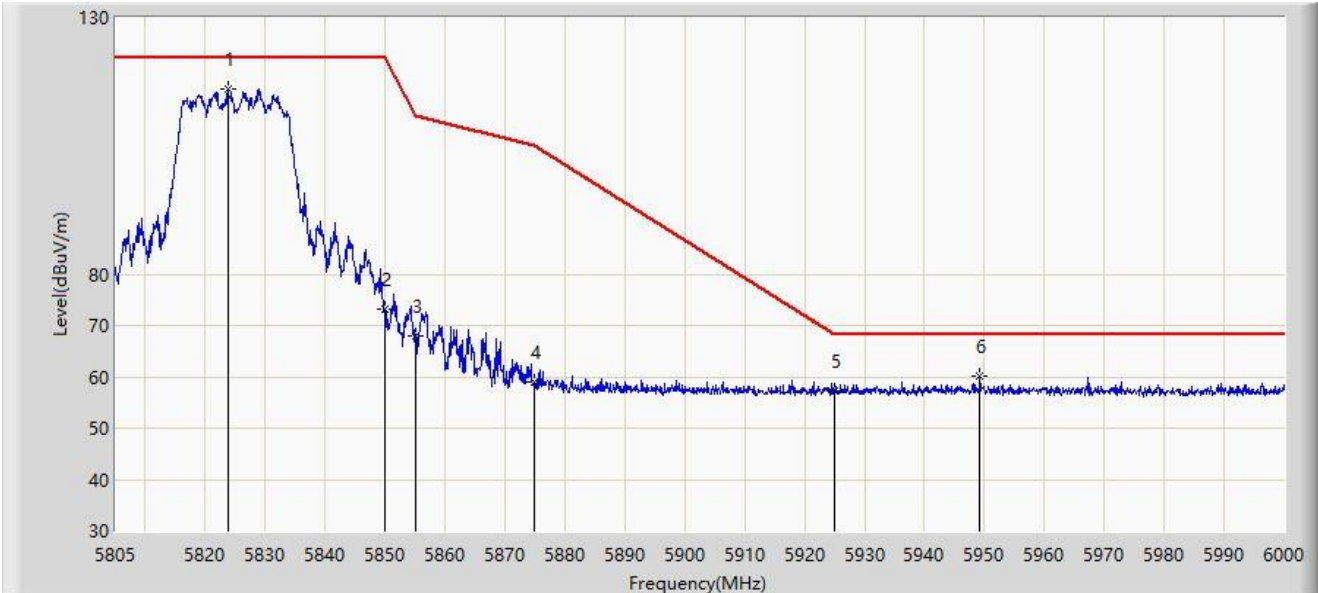


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5823.720	116.051	111.171	N/A	N/A	4.879	PK
2		5850.000	73.130	68.147	-49.070	122.200	4.984	PK
3		5855.000	67.971	62.933	-42.829	110.800	5.038	PK
4		5875.000	58.850	53.719	-46.350	105.200	5.131	PK
5		5925.000	57.187	51.952	-11.013	68.200	5.236	PK
6	*	5949.203	60.035	54.681	-8.165	68.200	5.354	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

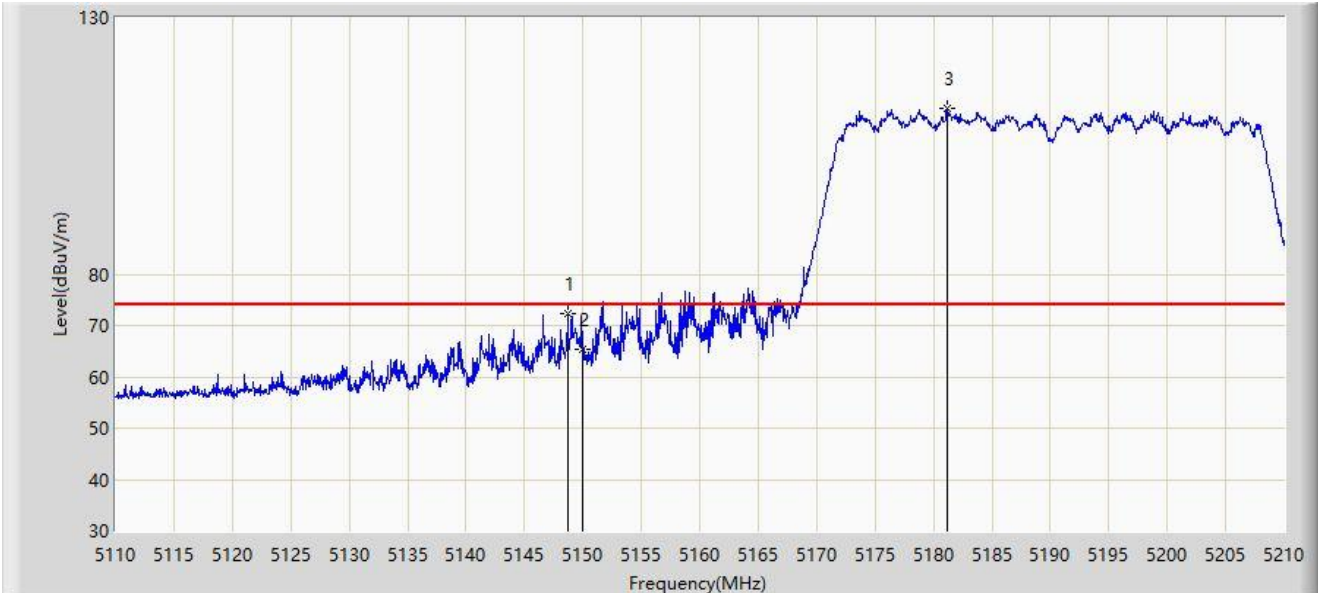


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.700	72.298	68.820	-1.702	74.000	3.478	PK
2		5150.000	65.244	61.762	-8.756	74.000	3.482	PK
3		5181.200	112.196	108.950	N/A	N/A	3.246	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

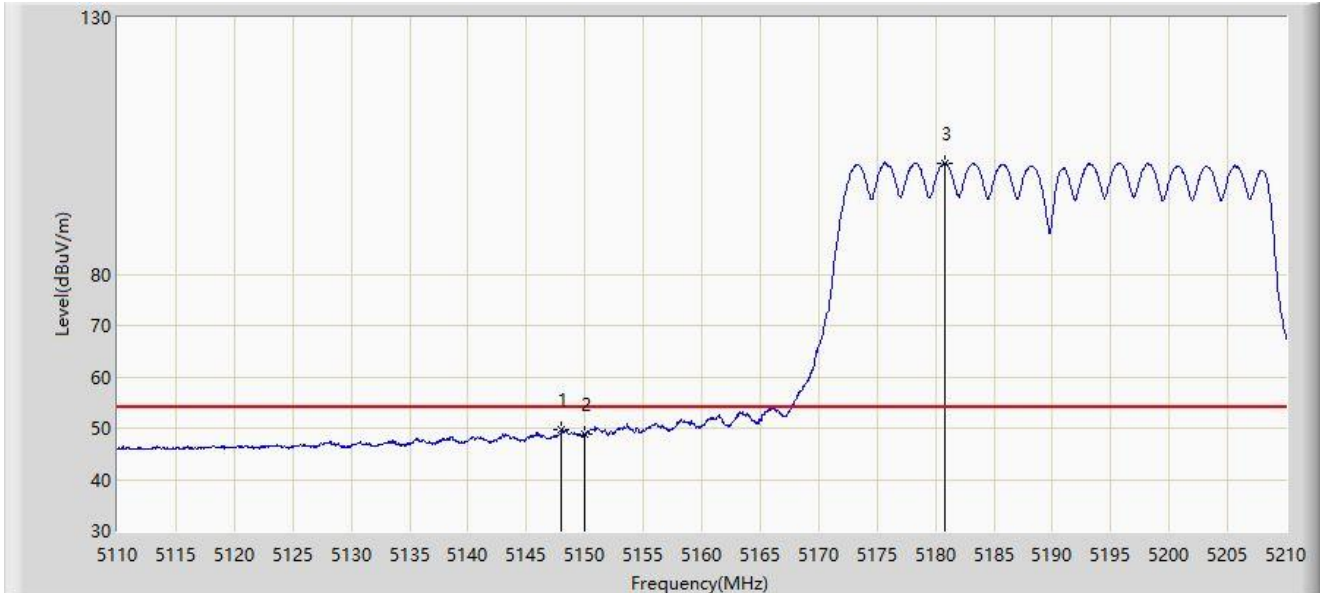


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.000	49.703	46.227	-4.297	54.000	3.475	AV
2		5150.000	48.761	45.279	-5.239	54.000	3.482	AV
3		5180.850	101.594	98.341	N/A	N/A	3.253	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

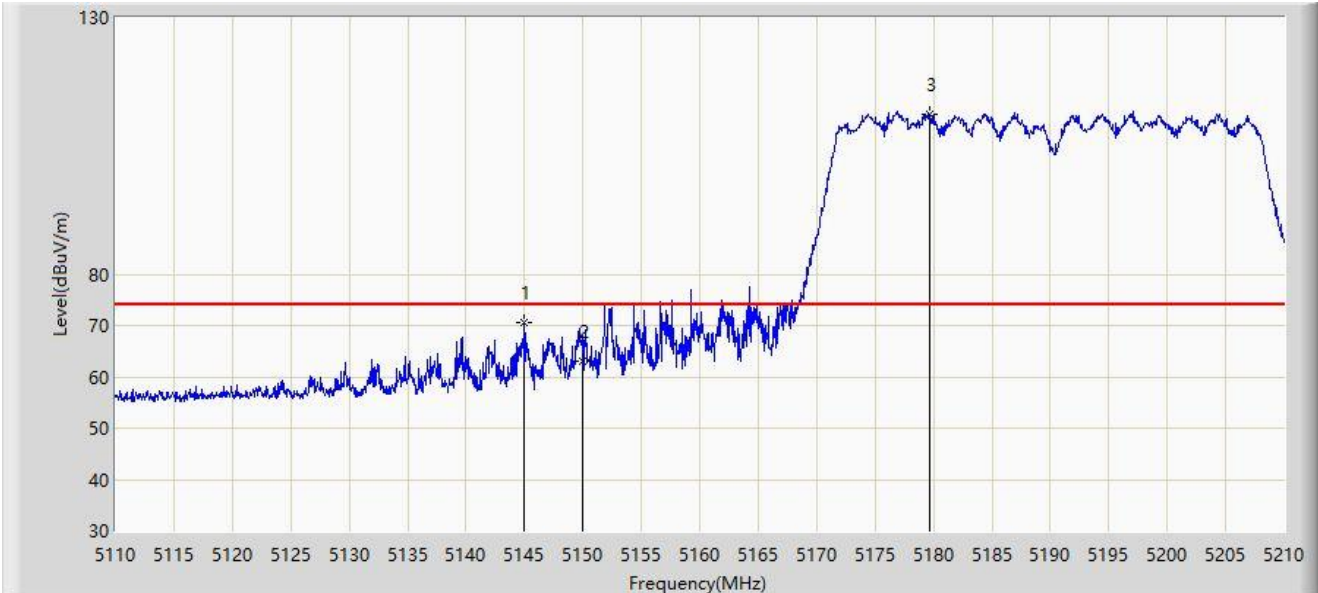


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5145.000	70.538	67.100	-3.462	74.000	3.437	PK
2		5150.000	63.143	59.661	-10.857	74.000	3.482	PK
3		5179.700	111.126	107.850	N/A	N/A	3.276	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz	

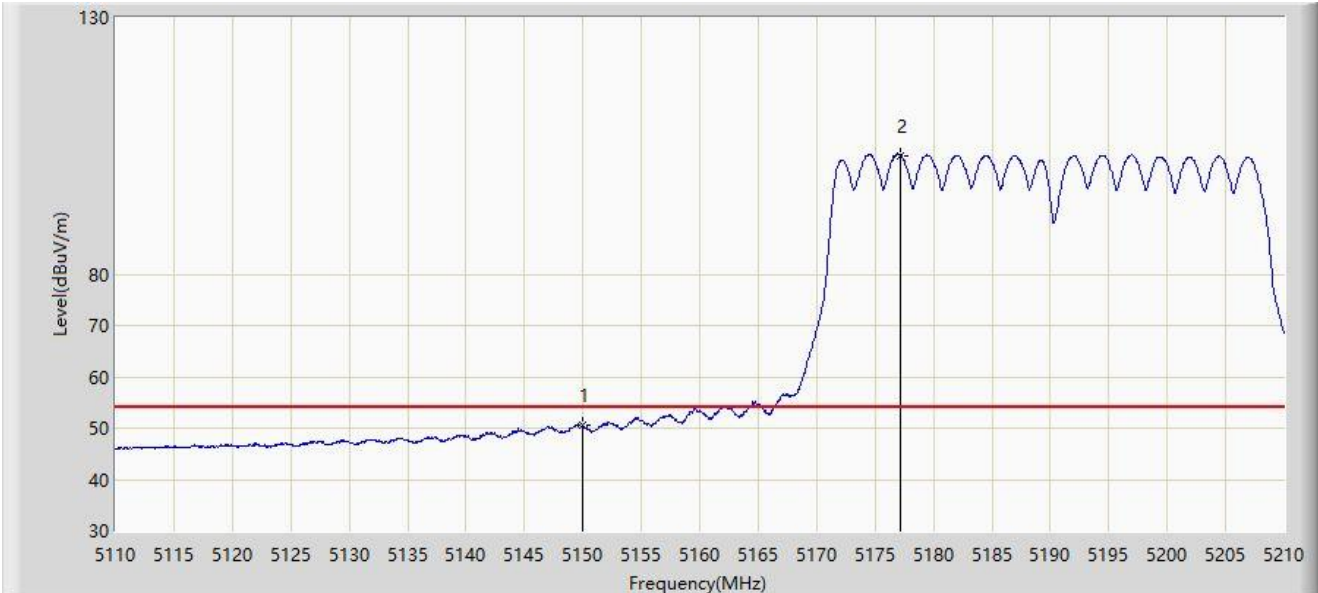


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	50.652	47.170	-3.348	54.000	3.482	AV
2		5177.150	103.188	99.861	N/A	N/A	3.327	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

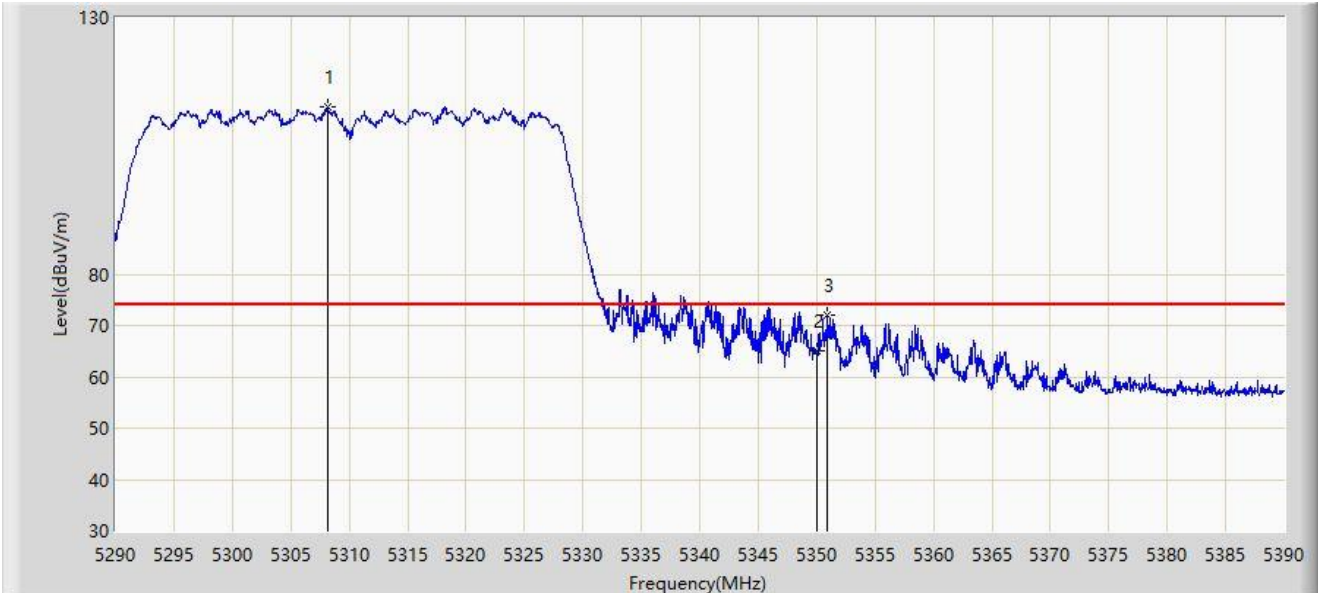


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5308.150	112.494	109.646	N/A	N/A	2.847	PK
2		5350.000	65.149	62.329	-8.851	74.000	2.820	PK
3	*	5350.900	72.044	69.239	-1.956	74.000	2.804	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

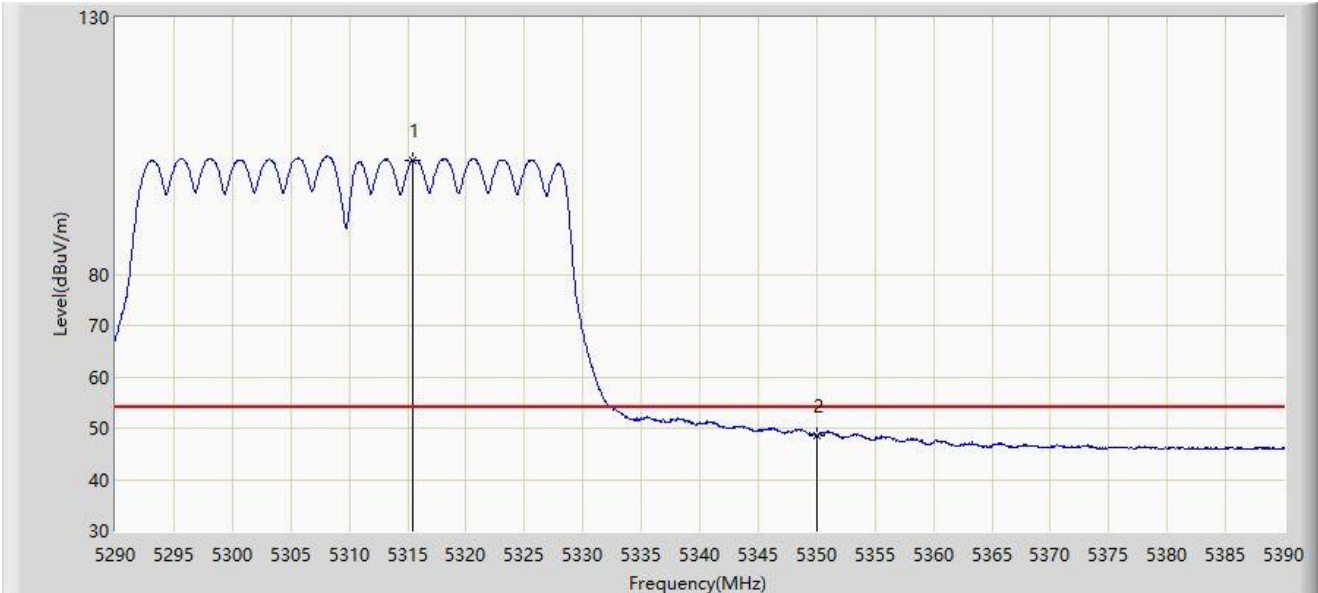


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5315.450	102.207	99.242	N/A	N/A	2.965	AV
2	*	5350.000	48.582	45.762	-5.418	54.000	2.820	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

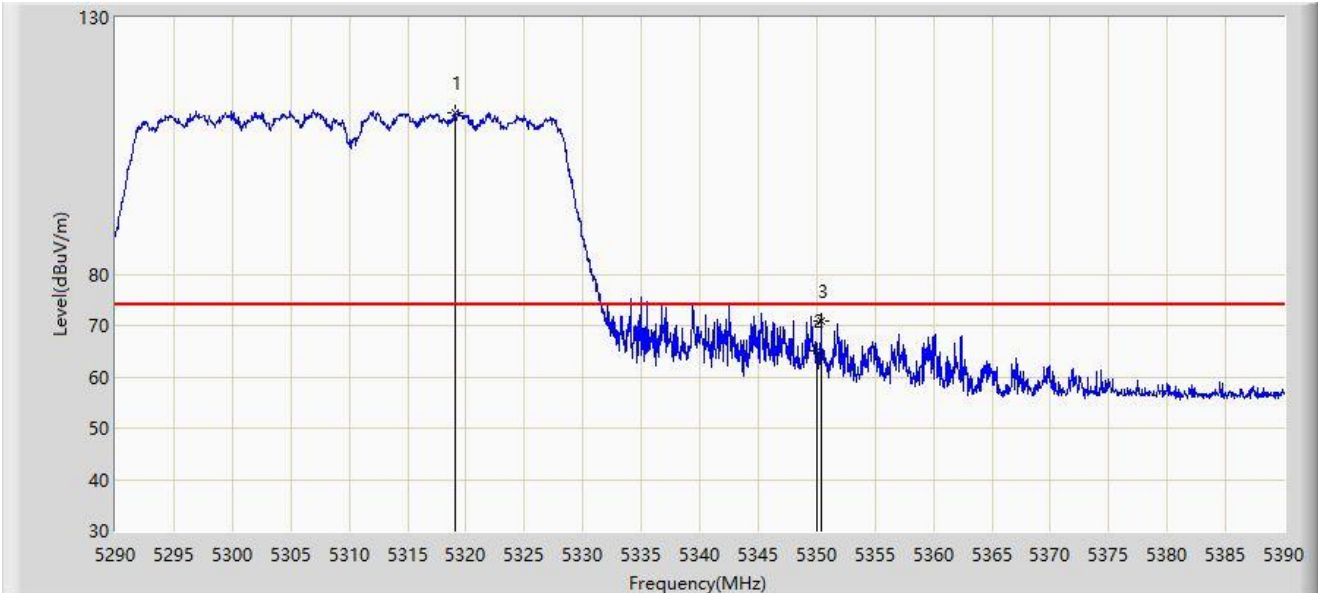


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5319.050	111.592	108.583	N/A	N/A	3.008	PK
2		5350.000	65.080	62.260	-8.920	74.000	2.820	PK
3	*	5350.350	70.888	68.074	-3.112	74.000	2.814	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

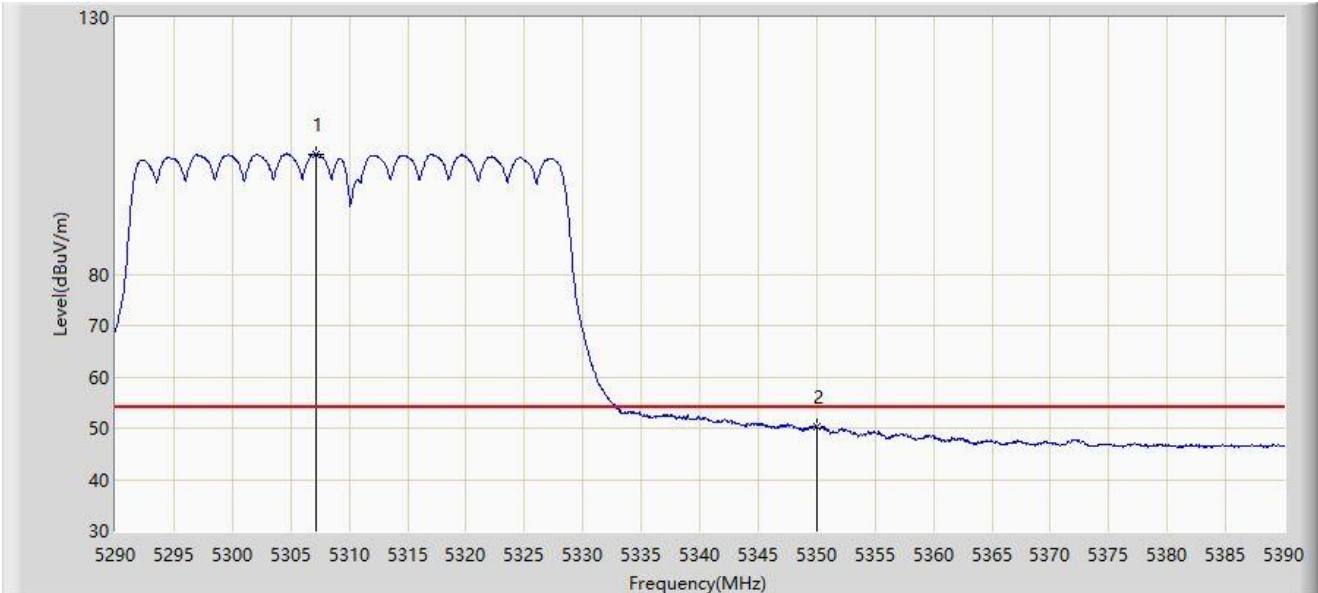


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5307.150	103.469	100.637	N/A	N/A	2.832	AV
2	*	5350.000	50.357	47.537	-3.643	54.000	2.820	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

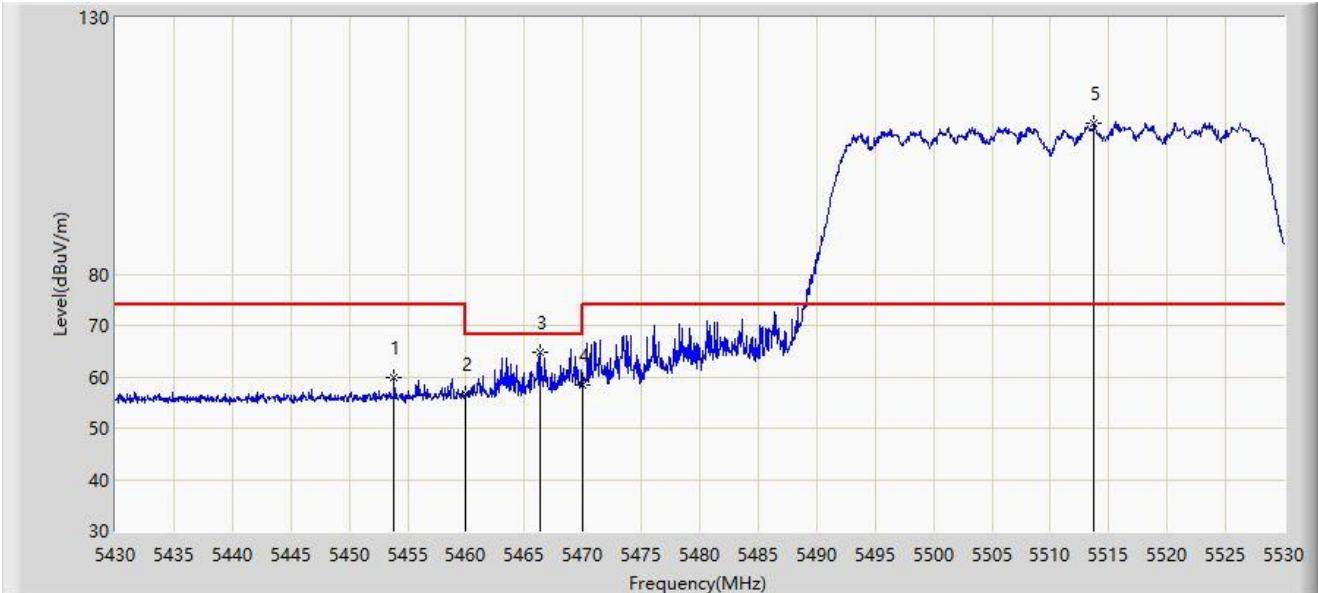


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5453.850	59.760	56.715	-14.240	74.000	3.046	PK
2		5460.000	56.541	53.392	-17.459	74.000	3.149	PK
3	*	5466.300	64.718	61.447	-3.482	68.200	3.271	PK
4		5470.000	58.335	54.993	-9.865	68.200	3.341	PK
5		5513.700	109.365	106.288	N/A	N/A	3.078	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

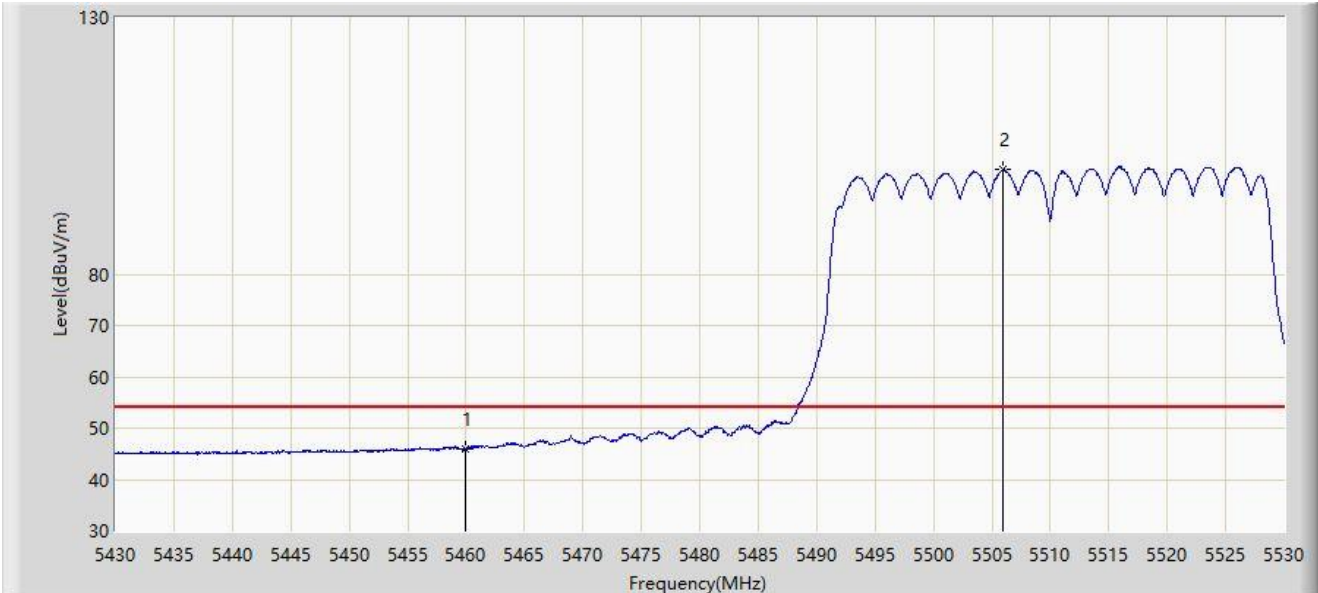


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	45.803	42.654	-8.197	54.000	3.149	AV
2		5505.950	100.369	97.228	N/A	N/A	3.141	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

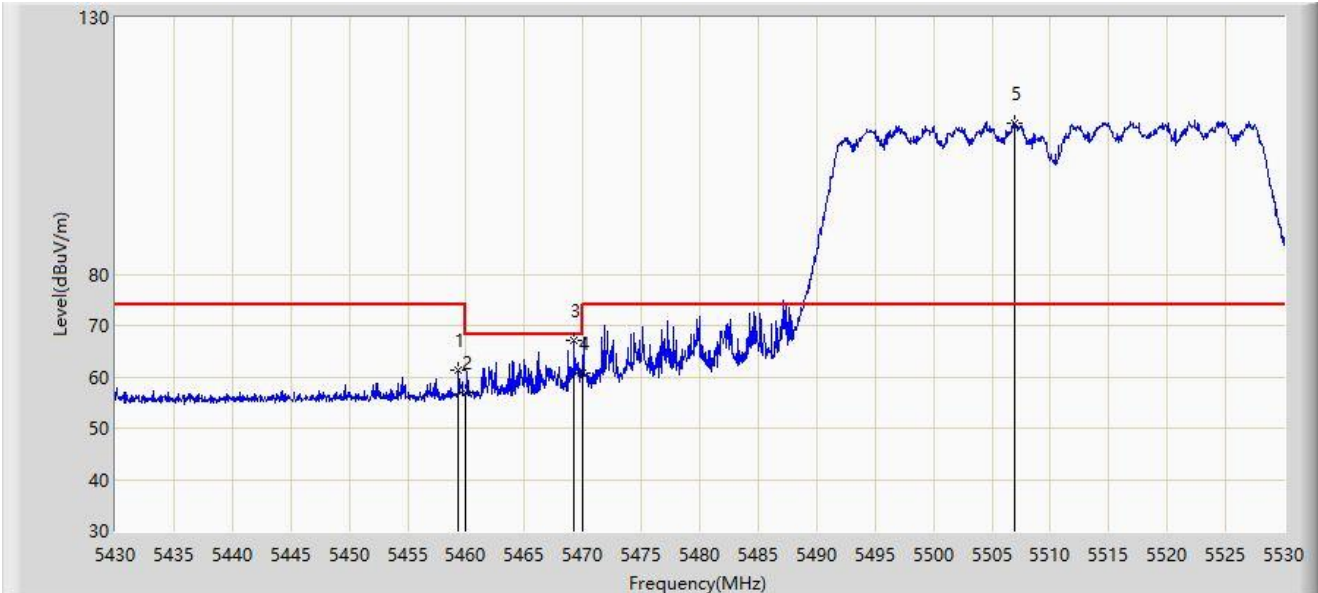


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5459.350	61.370	58.233	-12.630	74.000	3.136	PK
2		5460.000	57.077	53.928	-16.923	74.000	3.149	PK
3	*	5469.250	67.195	63.868	-1.005	68.200	3.327	PK
4		5470.000	60.754	57.412	-7.446	68.200	3.341	PK
5		5506.950	109.507	106.377	N/A	N/A	3.130	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

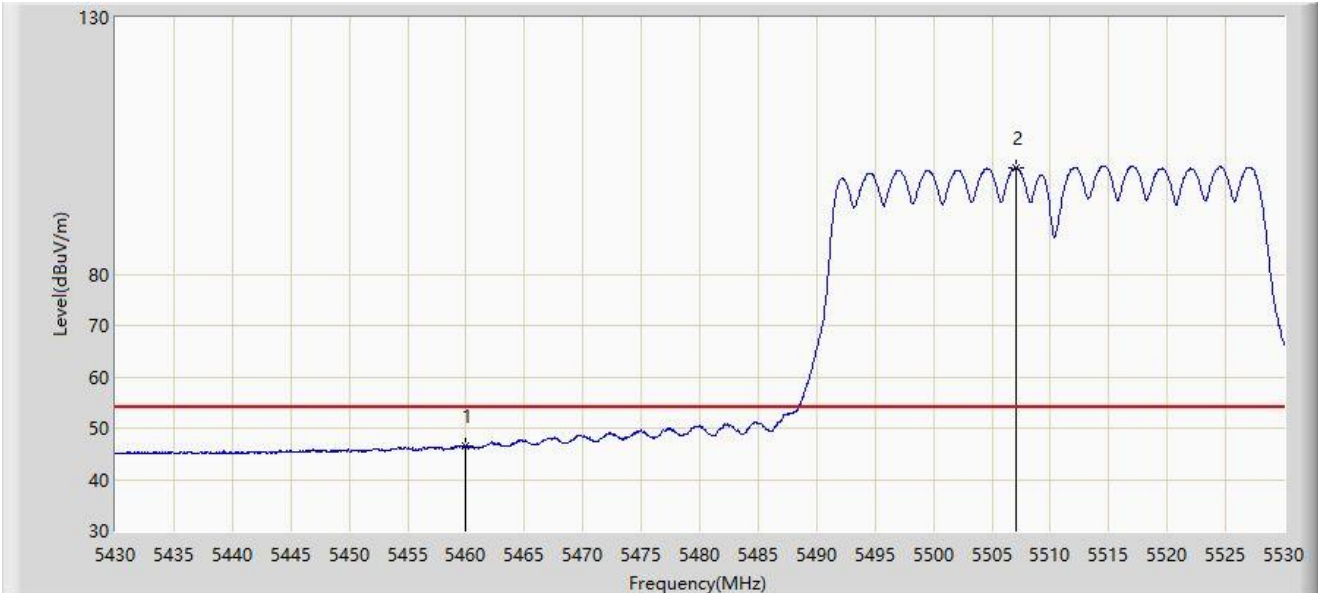


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	46.592	43.443	-7.408	54.000	3.149	AV
2		5507.050	100.687	97.558	N/A	N/A	3.129	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

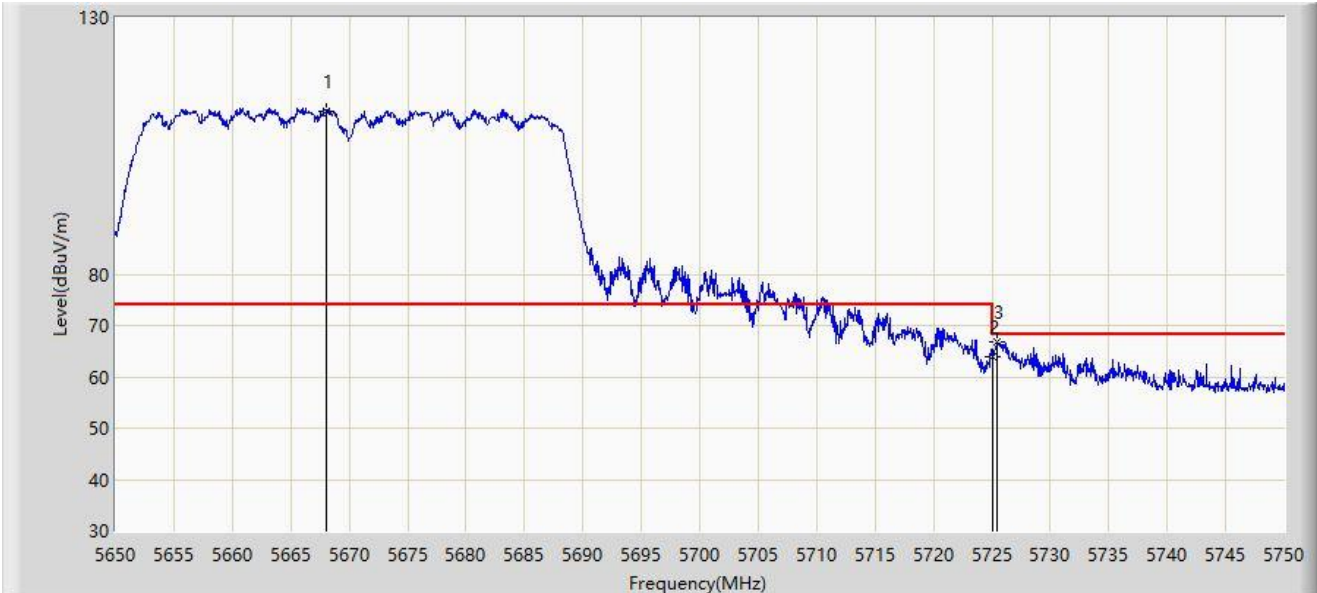


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5668.050	111.831	107.803	N/A	N/A	4.028	PK
2		5725.000	64.003	59.300	-4.197	68.200	4.703	PK
3	*	5725.450	66.750	62.043	-1.450	68.200	4.707	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

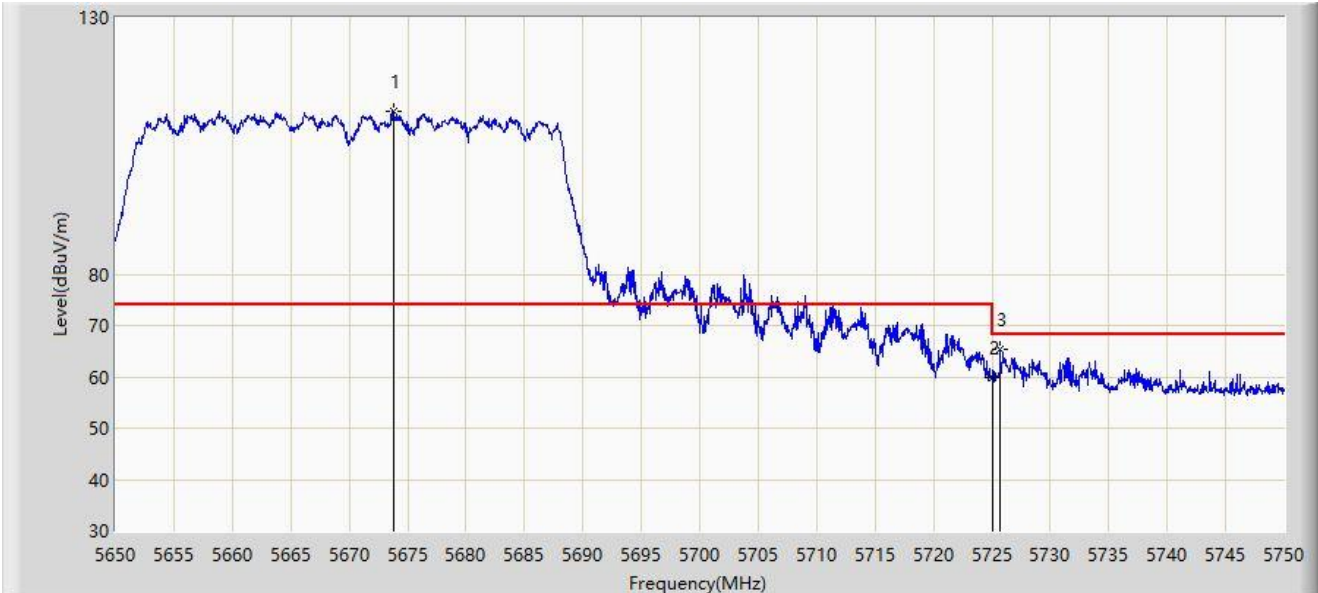


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5673.850	111.715	107.700	N/A	N/A	4.015	PK
2		5725.000	59.997	55.294	-8.203	68.200	4.703	PK
3	*	5725.750	65.414	60.705	-2.786	68.200	4.709	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

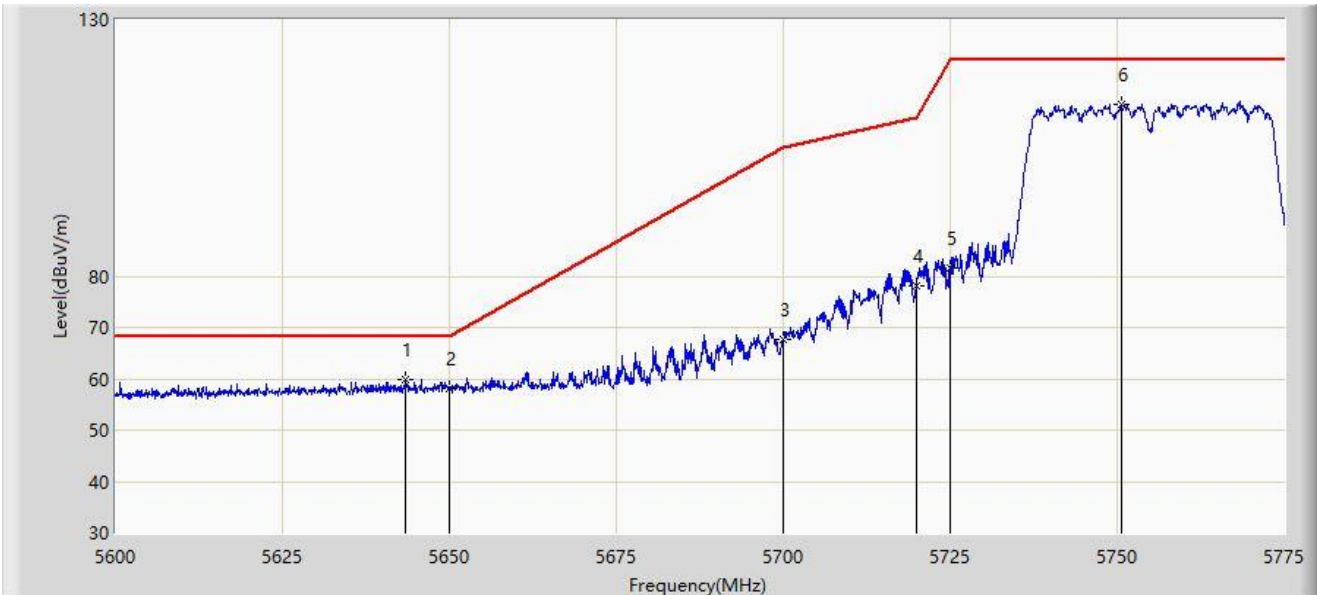


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5643.400	59.734	55.579	-8.466	68.200	4.155	PK
2		5650.000	58.103	53.980	-10.097	68.200	4.122	PK
3		5700.000	67.747	63.310	-37.453	105.200	4.437	PK
4		5720.000	77.981	73.317	-32.819	110.800	4.663	PK
5		5725.000	81.722	77.019	-40.478	122.200	4.703	PK
6		5750.675	113.479	108.991	N/A	N/A	4.488	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

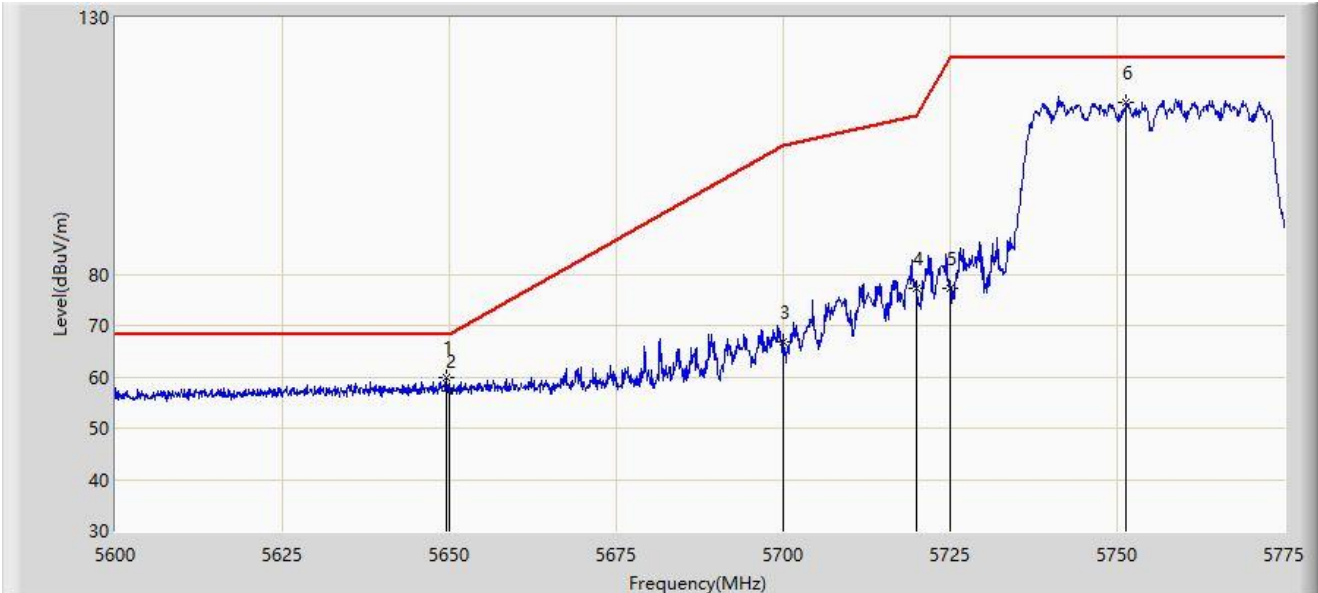


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5649.612	59.859	55.735	-8.341	68.200	4.125	PK
2		5650.000	57.312	53.189	-10.888	68.200	4.122	PK
3		5700.000	66.745	62.308	-38.455	105.200	4.437	PK
4		5720.000	77.279	72.615	-33.521	110.800	4.663	PK
5		5725.000	77.298	72.595	-44.902	122.200	4.703	PK
6		5751.375	113.549	109.052	N/A	N/A	4.497	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

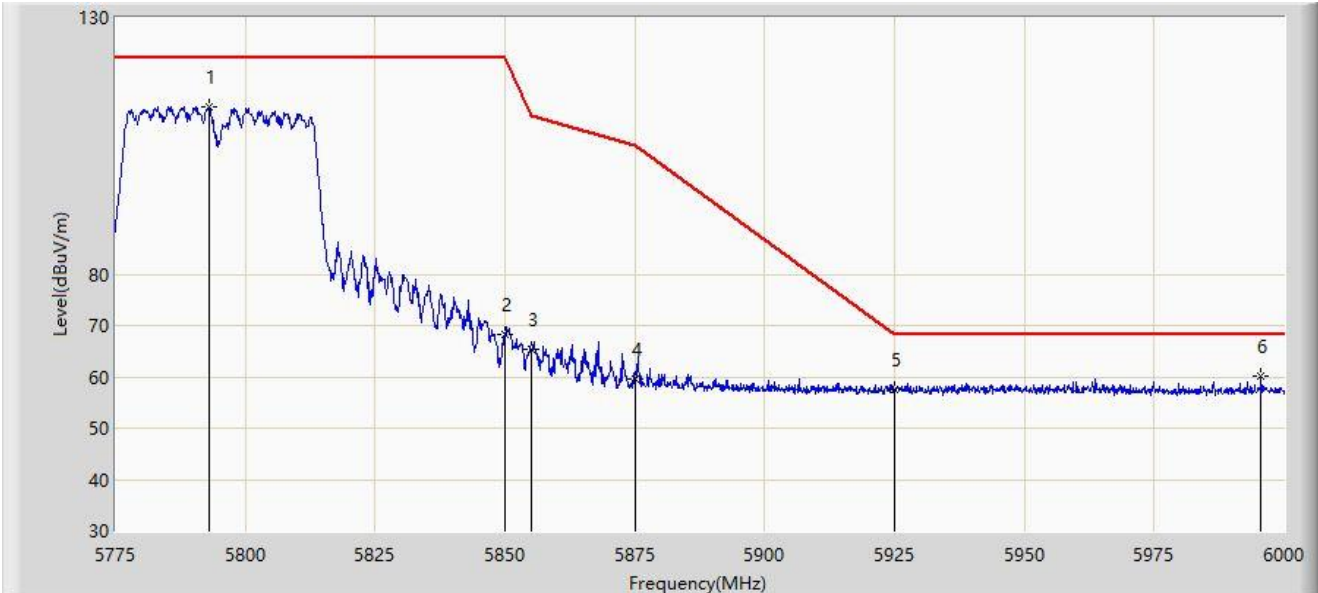


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5793.112	112.536	107.471	N/A	N/A	5.064	PK
2		5850.000	68.182	63.199	-54.018	122.200	4.984	PK
3		5855.000	65.428	60.390	-45.372	110.800	5.038	PK
4		5875.000	59.604	54.473	-45.596	105.200	5.131	PK
5		5925.000	57.481	52.246	-10.719	68.200	5.236	PK
6	*	5995.612	60.286	54.915	-7.914	68.200	5.372	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

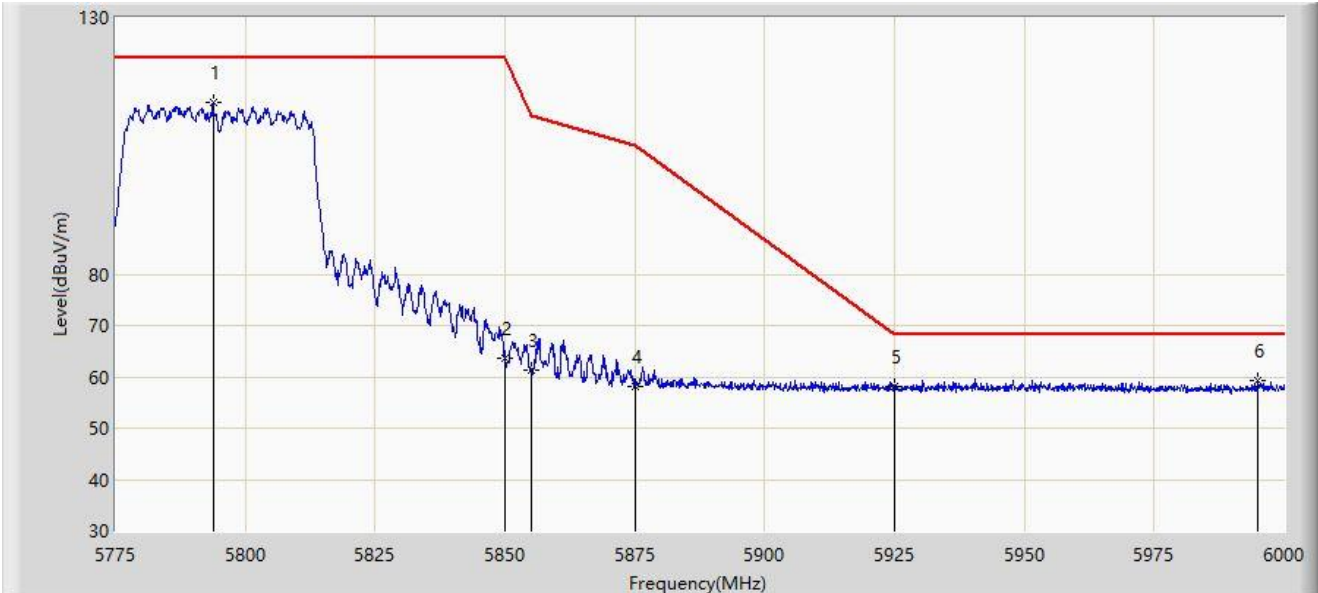


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5793.788	113.358	108.285	N/A	N/A	5.073	PK
2		5850.000	63.689	58.706	-58.511	122.200	4.984	PK
3		5855.000	61.282	56.244	-49.518	110.800	5.038	PK
4		5875.000	58.147	53.016	-47.053	105.200	5.131	PK
5		5925.000	58.085	52.850	-10.115	68.200	5.236	PK
6	*	5994.937	59.230	53.865	-8.970	68.200	5.365	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

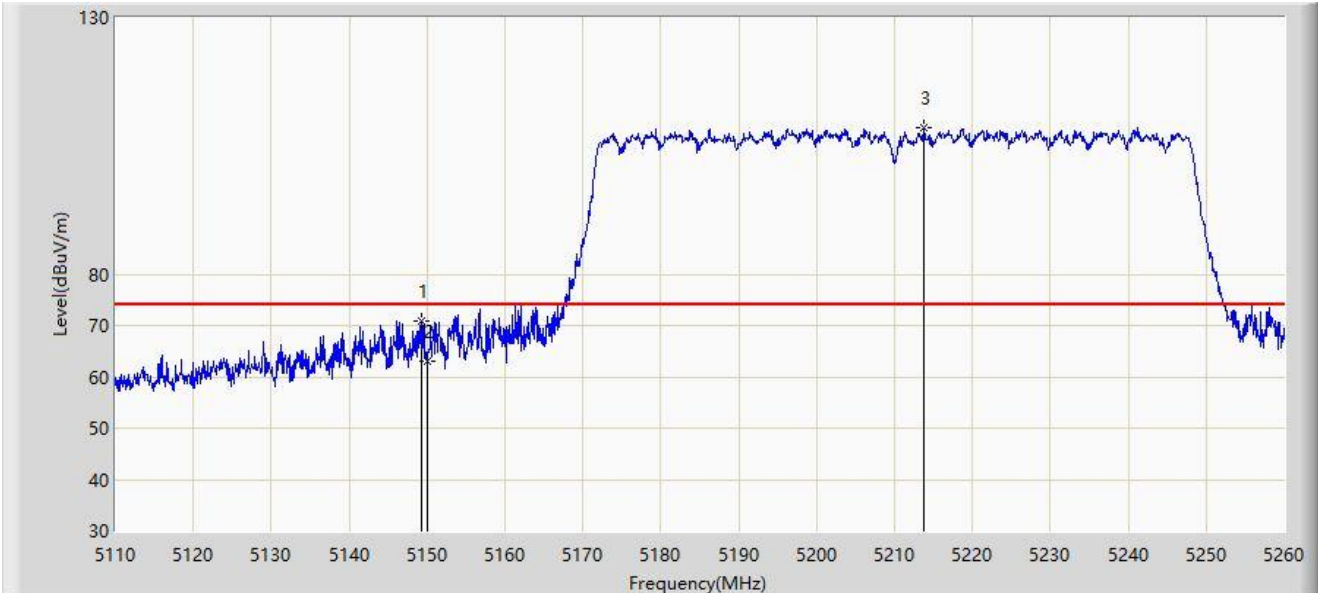


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.225	70.933	67.454	-3.067	74.000	3.479	PK
2		5150.000	63.168	59.686	-10.832	74.000	3.482	PK
3		5213.800	108.430	105.519	N/A	N/A	2.911	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

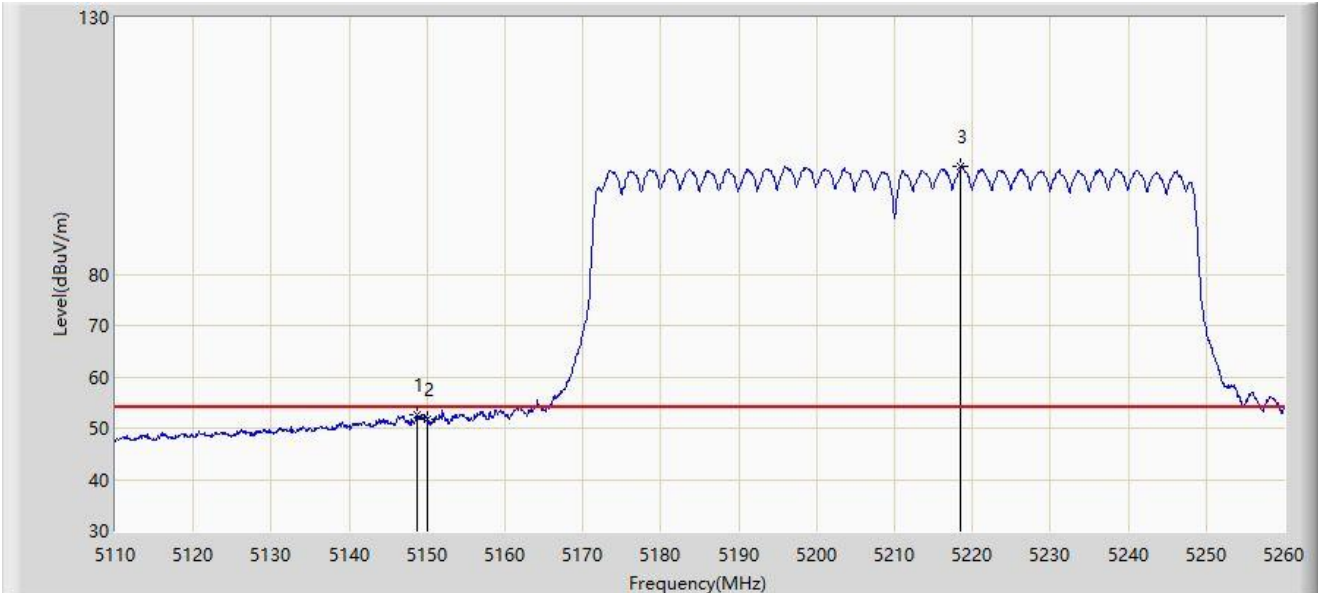


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.700	52.472	48.994	-1.528	54.000	3.478	AV
2		5150.000	51.822	48.340	-2.178	54.000	3.482	AV
3		5218.525	100.978	98.018	N/A	N/A	2.960	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

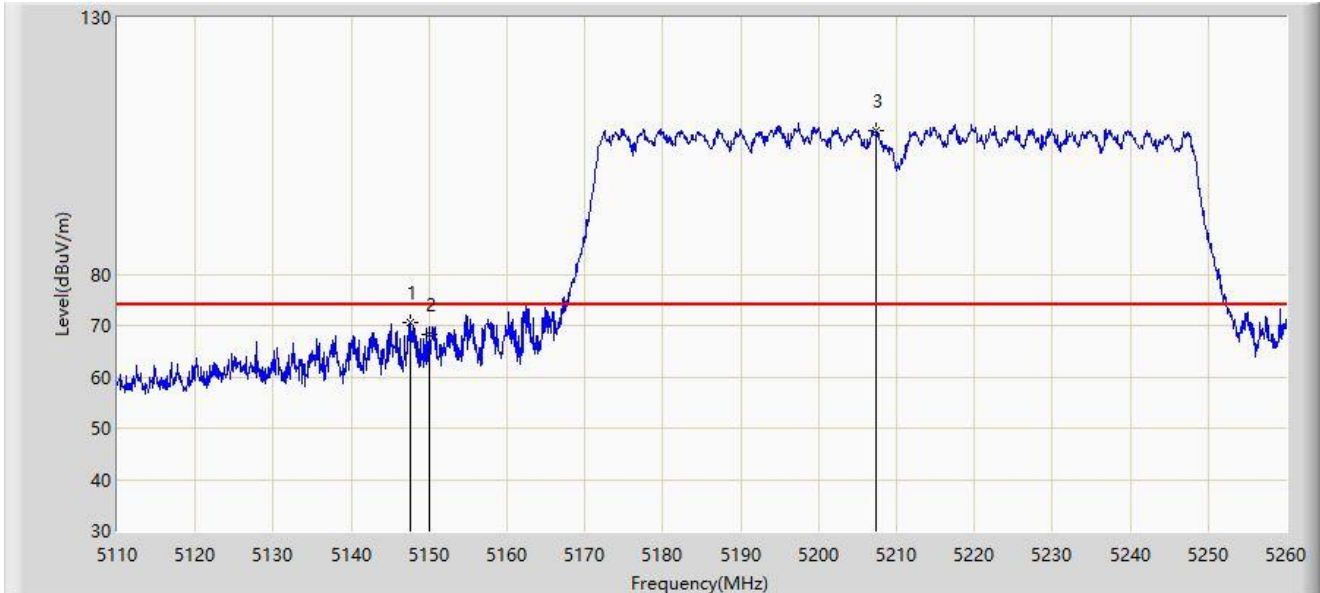


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5147.500	70.698	67.229	-3.302	74.000	3.470	PK
2		5150.000	68.318	64.836	-5.682	74.000	3.482	PK
3		5207.350	108.088	105.201	N/A	N/A	2.887	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

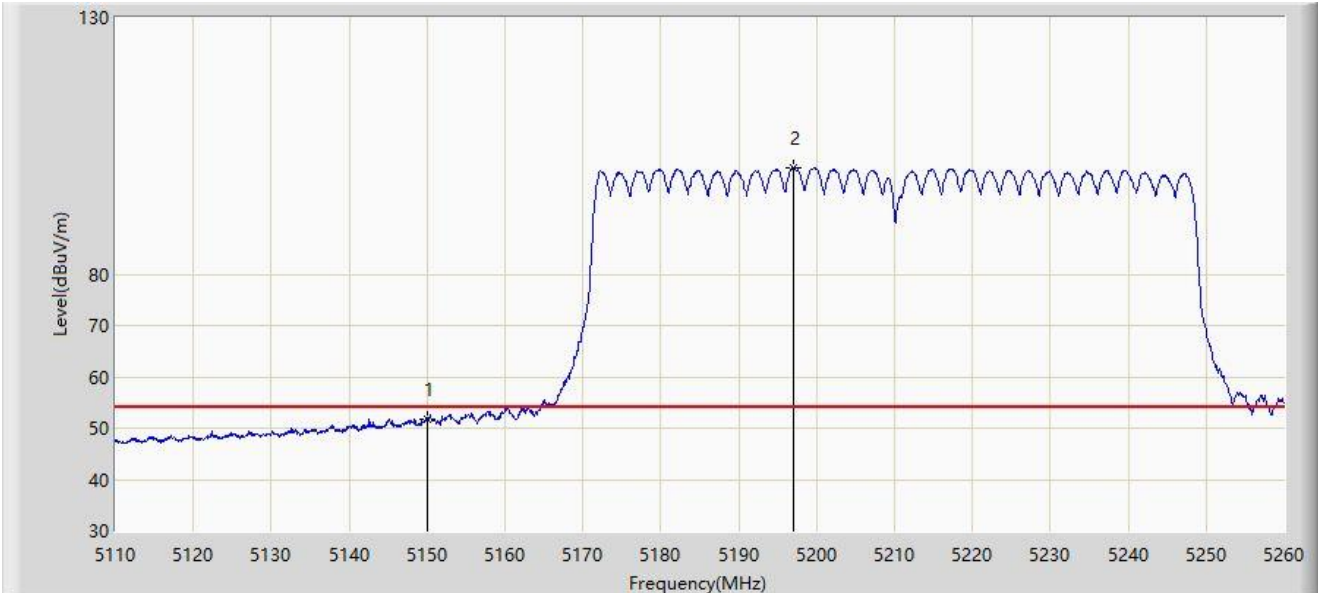


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	51.666	48.184	-2.334	54.000	3.482	AV
2		5197.075	100.801	97.905	N/A	N/A	2.896	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

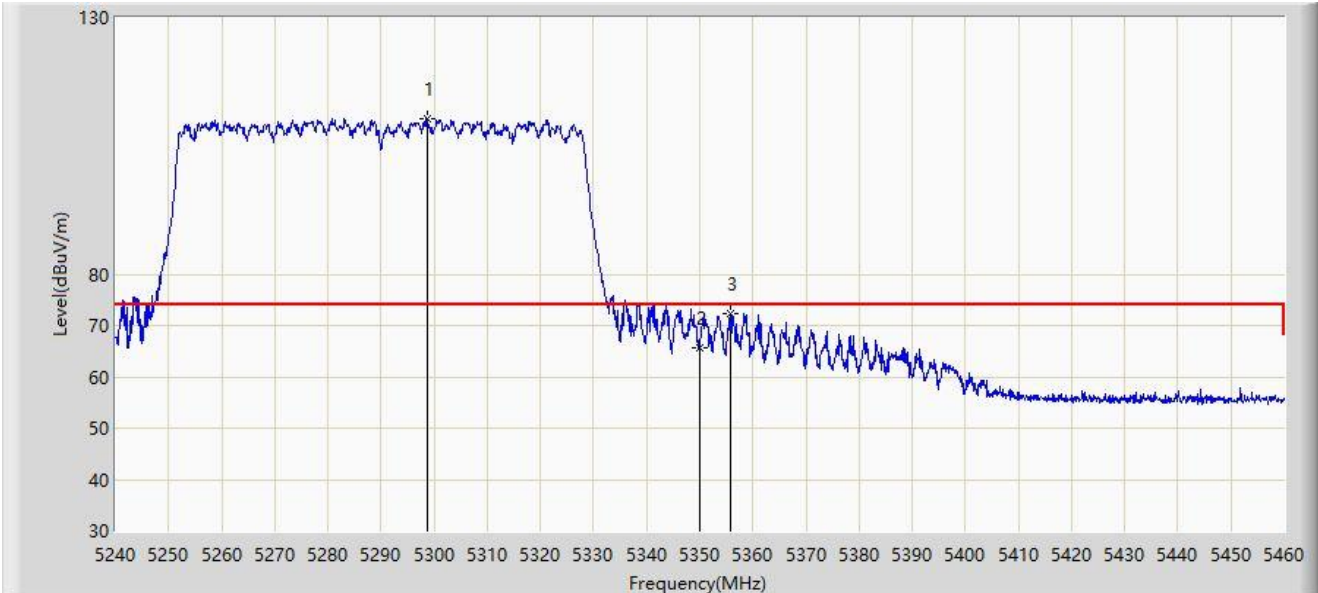


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5298.740	110.412	107.700	N/A	N/A	2.712	PK
2		5350.000	65.780	62.960	-8.220	74.000	2.820	PK
3	*	5355.720	72.225	69.422	-1.775	74.000	2.803	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

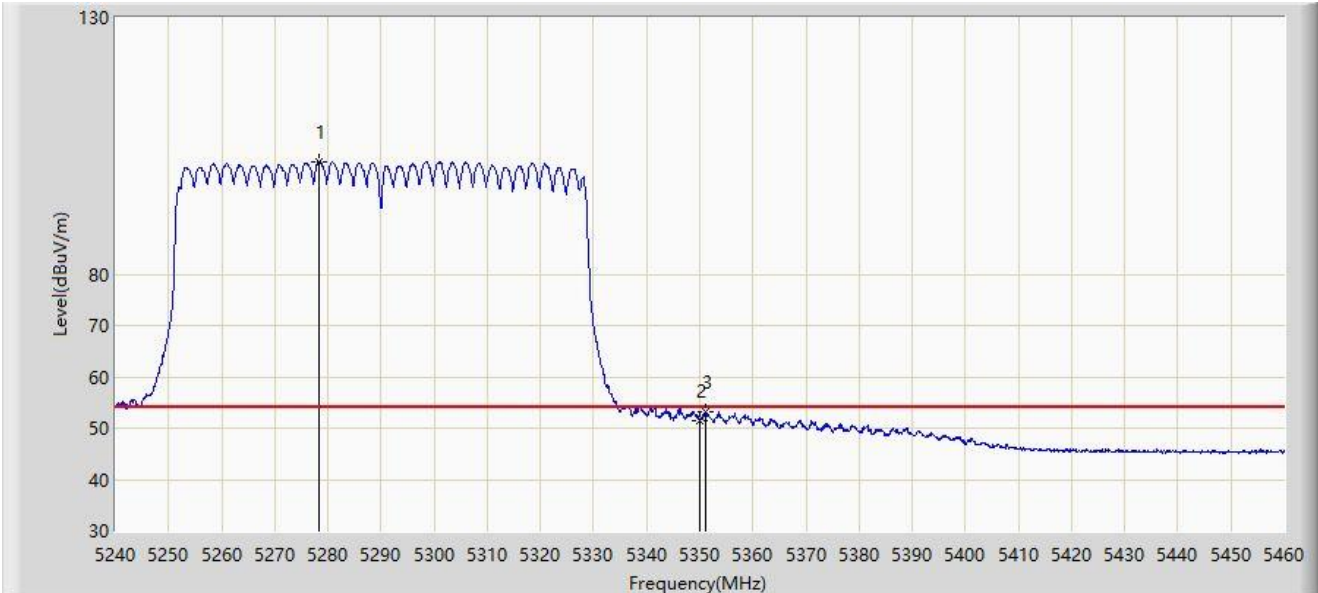


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5278.280	101.919	99.360	N/A	N/A	2.559	AV
2		5350.000	51.338	48.518	-2.662	54.000	2.820	AV
3	*	5351.210	53.147	50.348	-0.853	54.000	2.800	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

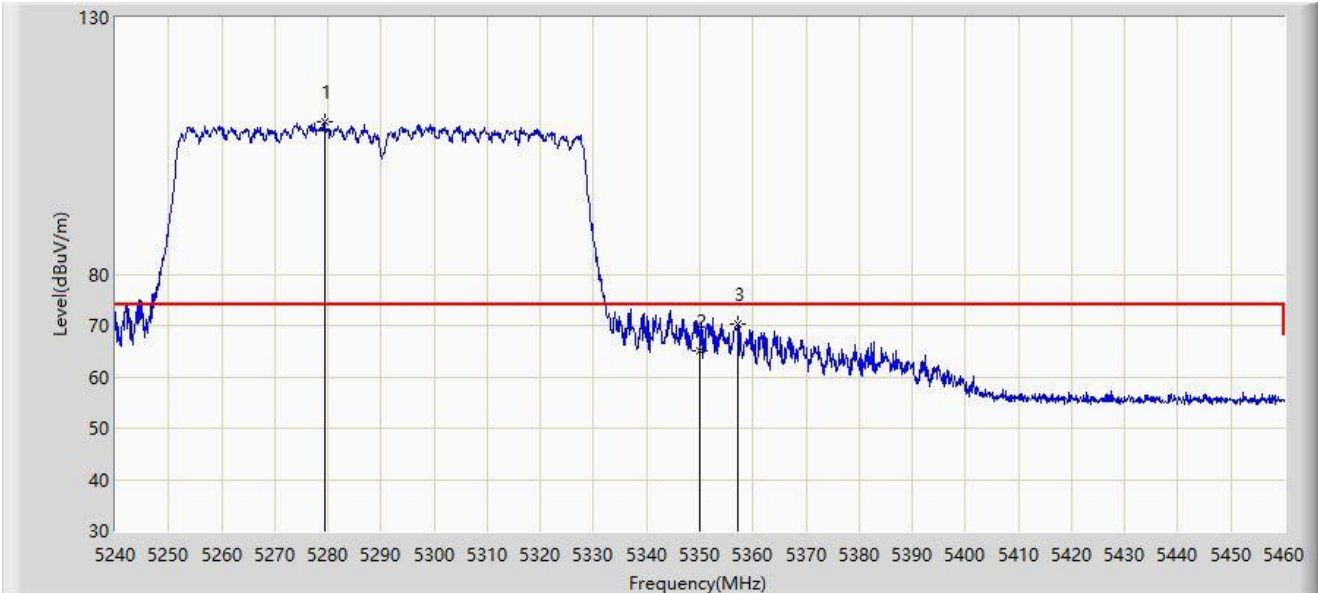


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5279.380	109.589	107.038	N/A	N/A	2.551	PK
2		5350.000	65.053	62.233	-8.947	74.000	2.820	PK
3	*	5357.150	70.360	67.551	-3.640	74.000	2.809	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

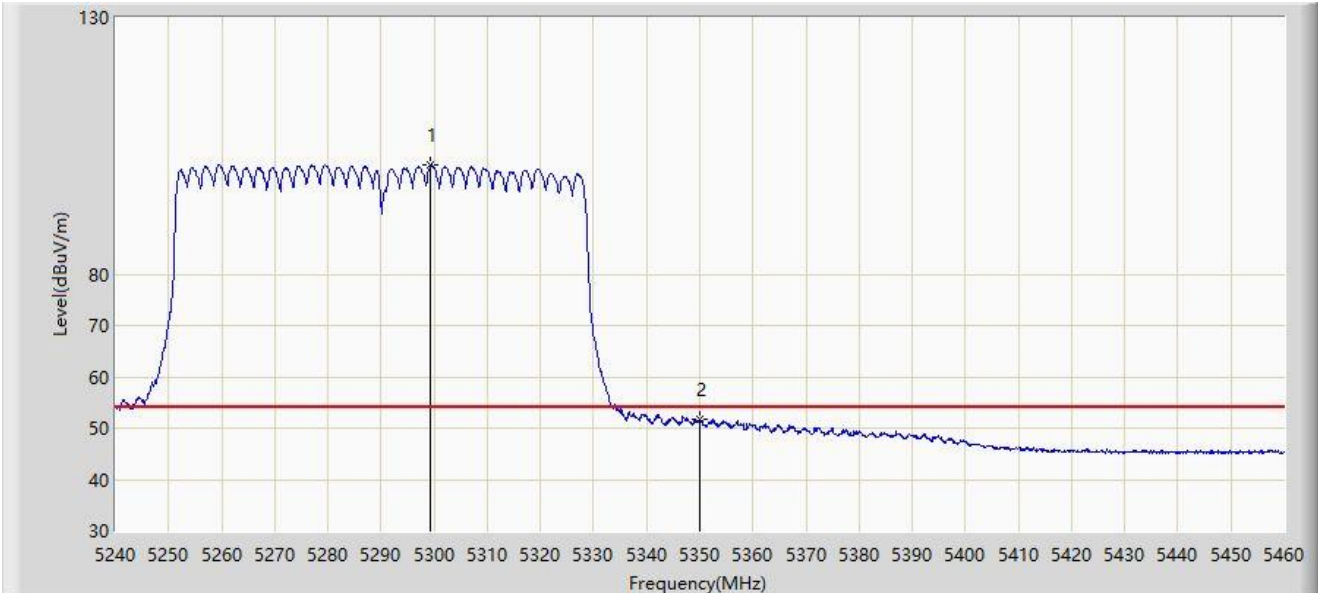


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5299.400	101.306	98.587	N/A	N/A	2.720	AV
2	*	5350.000	51.691	48.871	-2.309	54.000	2.820	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

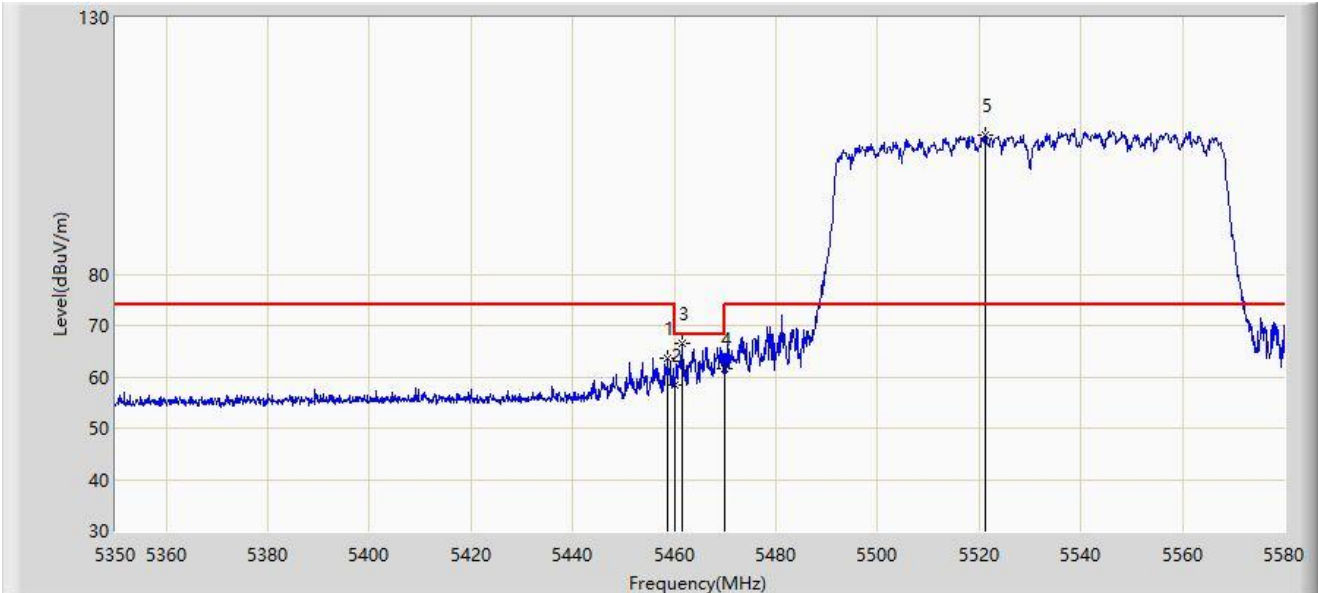


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5458.675	63.655	60.531	-10.345	74.000	3.123	PK
2		5460.000	58.427	55.278	-15.573	74.000	3.149	PK
3	*	5461.435	66.442	63.265	-1.758	68.200	3.176	PK
4		5470.000	61.693	58.351	-6.507	68.200	3.341	PK
5		5521.235	107.033	103.991	N/A	N/A	3.042	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

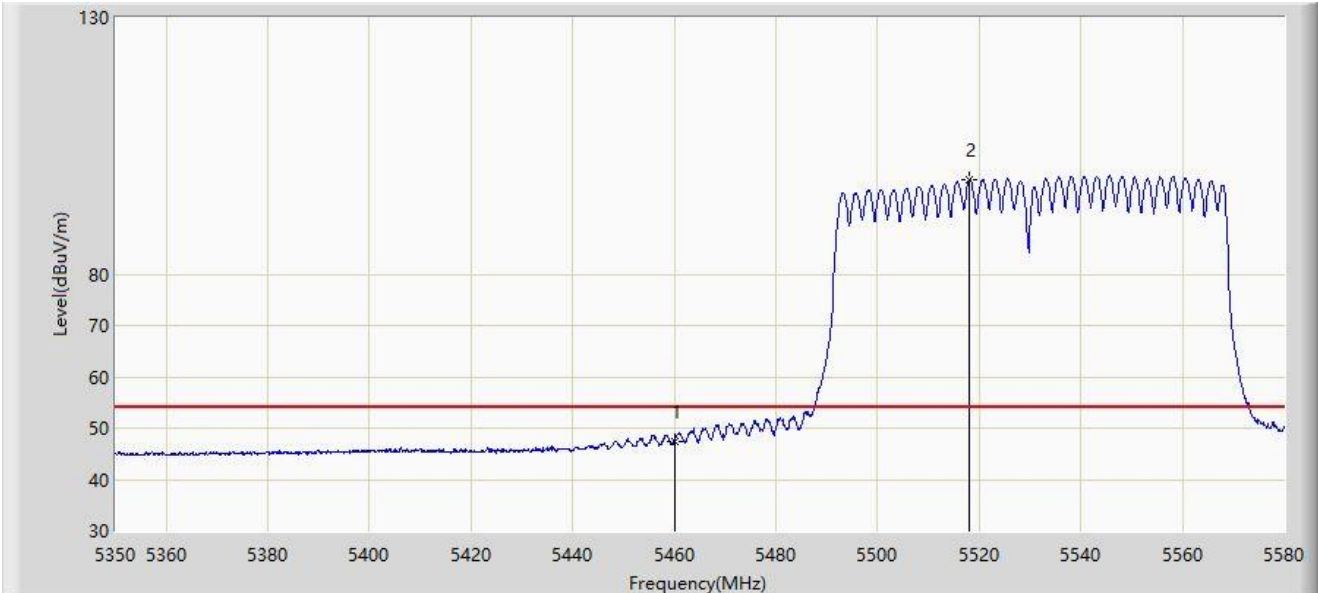


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5460.000	47.407	44.258	-6.593	54.000	3.149	AV
2		5517.900	98.269	95.211	N/A	N/A	3.057	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

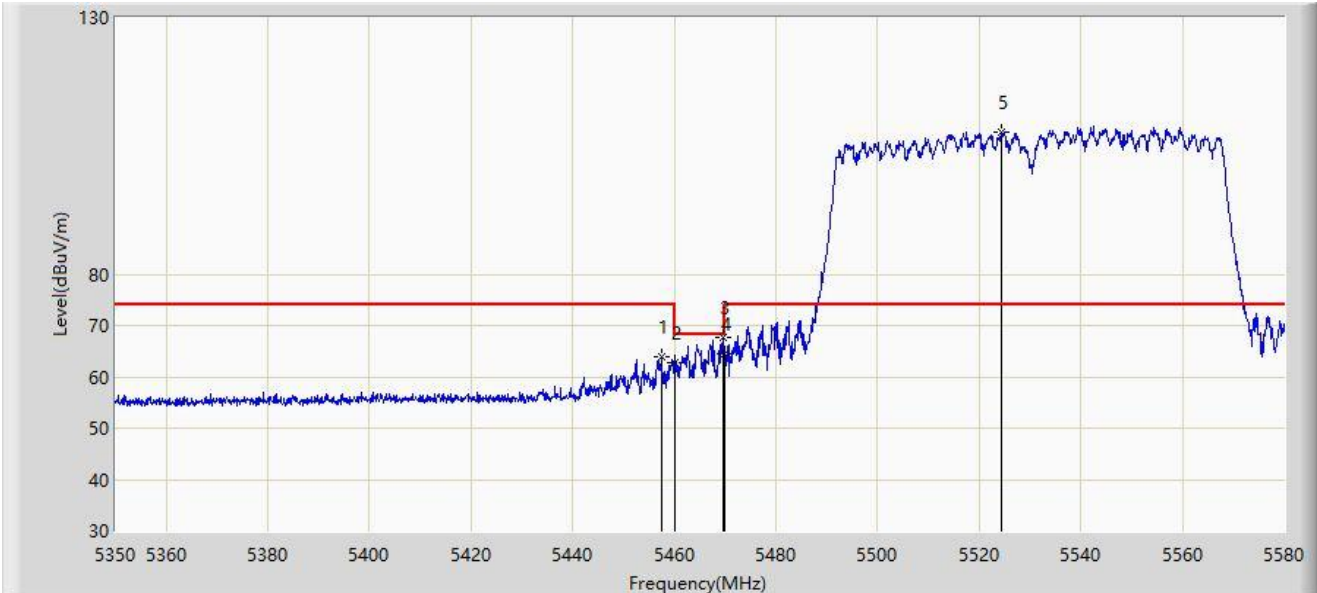


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.525	63.862	60.761	-10.138	74.000	3.102	PK
2		5460.000	62.631	59.482	-11.369	74.000	3.149	PK
3	*	5469.485	67.680	64.348	-0.520	68.200	3.333	PK
4		5470.000	64.548	61.206	-3.652	68.200	3.341	PK
5		5524.340	107.543	104.453	N/A	N/A	3.091	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

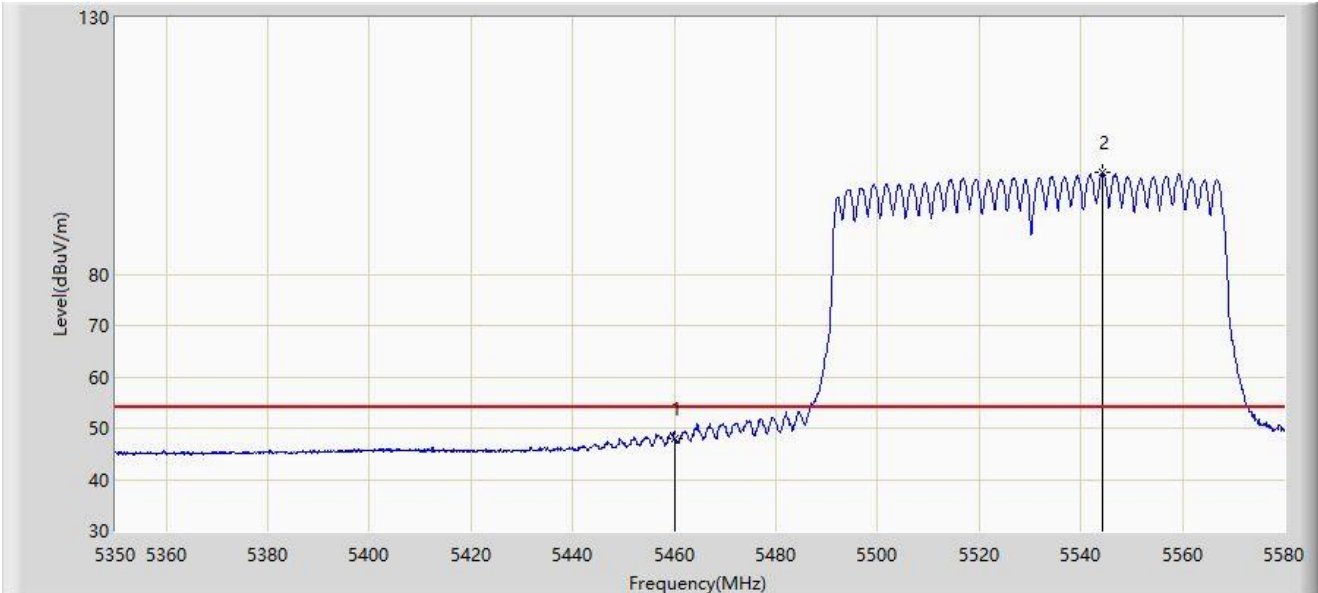


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	48.009	44.860	-5.991	54.000	3.149	AV
2		5544.120	99.732	96.367	N/A	N/A	3.365	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

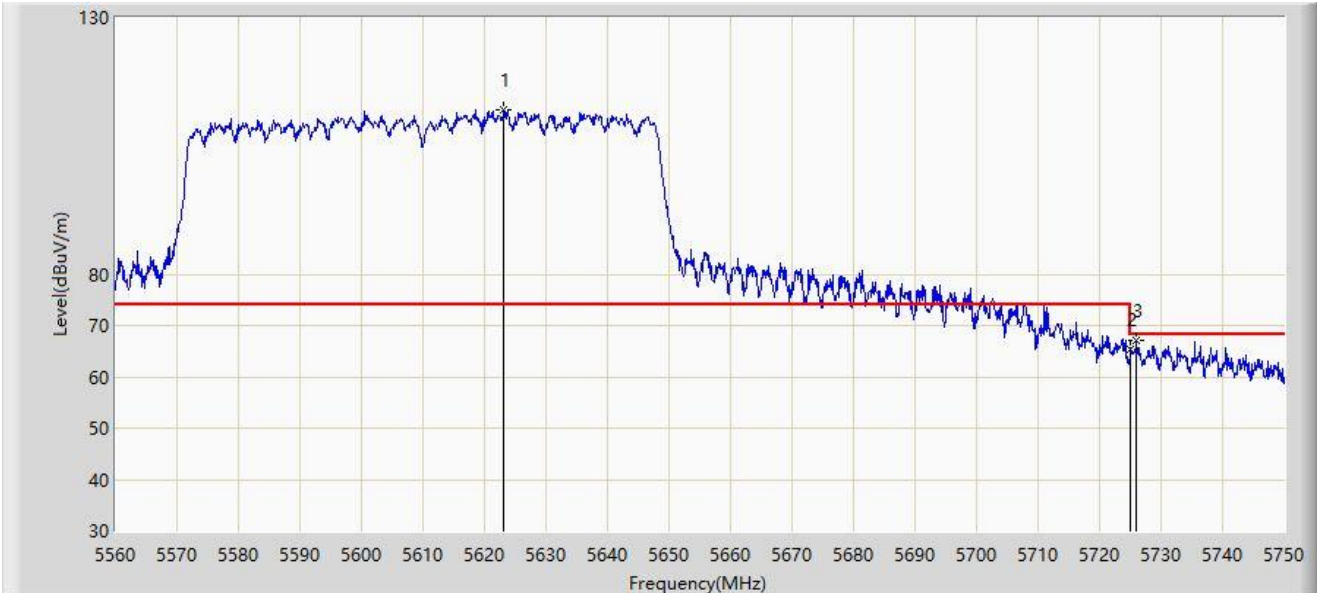


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5623.175	111.897	107.964	N/A	N/A	3.933	PK
2		5725.000	65.263	60.560	-2.937	68.200	4.703	PK
3	*	5725.965	67.052	62.341	-1.148	68.200	4.711	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

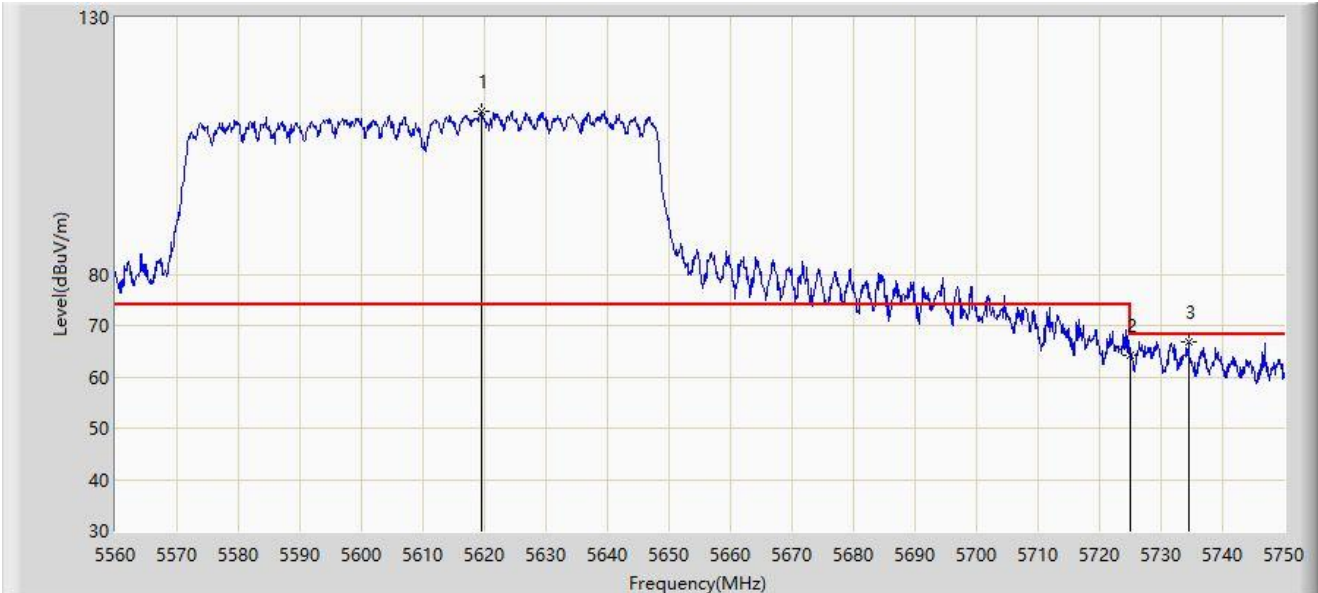


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5619.470	111.698	107.868	N/A	N/A	3.830	PK
2		5725.000	64.061	59.358	-4.139	68.200	4.703	PK
3	*	5734.515	66.722	62.158	-1.478	68.200	4.564	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

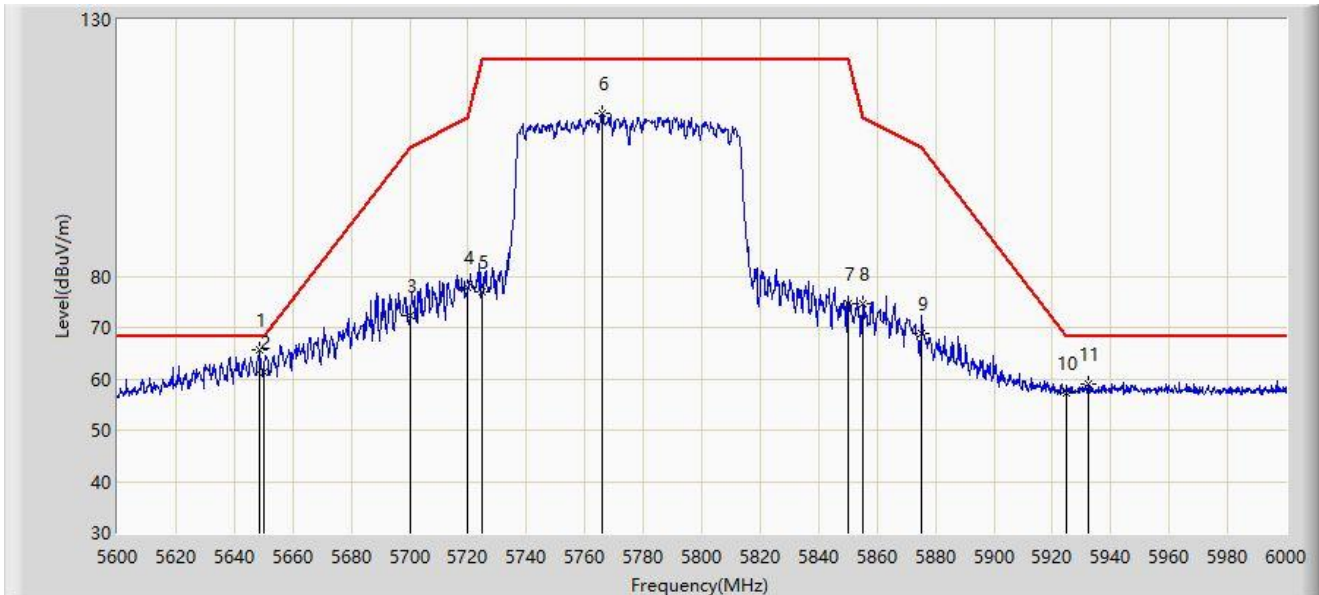


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5648.600	65.695	61.566	-2.505	68.200	4.129	PK
2		5650.000	61.240	57.117	-6.960	68.200	4.122	PK
3		5700.000	72.388	67.951	-32.812	105.200	4.437	PK
4		5720.000	77.755	73.091	-33.045	110.800	4.663	PK
5		5725.000	77.061	72.358	-45.139	122.200	4.703	PK
6		5765.800	111.631	106.921	N/A	N/A	4.711	PK
7		5850.000	74.509	69.526	-47.691	122.200	4.984	PK
8		5855.000	74.579	69.541	-36.221	110.800	5.038	PK
9		5875.000	68.884	63.753	-36.316	105.200	5.131	PK
10		5925.000	57.165	51.930	-11.035	68.200	5.236	PK
11		5932.200	58.991	53.721	-9.209	68.200	5.270	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

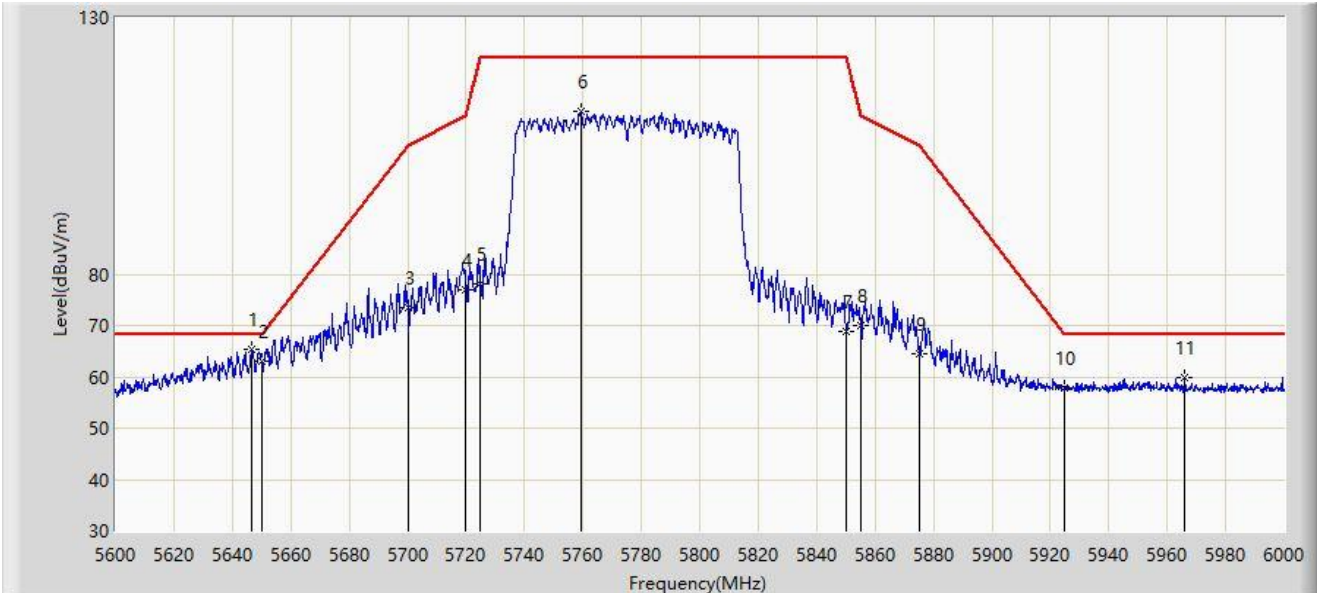


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5646.400	65.401	61.261	-2.799	68.200	4.140	PK
2		5650.000	62.936	58.813	-5.264	68.200	4.122	PK
3		5700.000	73.613	69.176	-31.587	105.200	4.437	PK
4		5720.000	77.028	72.364	-33.772	110.800	4.663	PK
5		5725.000	77.993	73.290	-44.207	122.200	4.703	PK
6		5759.600	111.611	107.017	N/A	N/A	4.593	PK
7		5850.000	68.958	63.975	-53.242	122.200	4.984	PK
8		5855.000	69.871	64.833	-40.929	110.800	5.038	PK
9		5875.000	64.425	59.294	-40.775	105.200	5.131	PK
10		5925.000	57.868	52.633	-10.332	68.200	5.236	PK
11		5966.000	59.714	54.373	-8.486	68.200	5.342	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

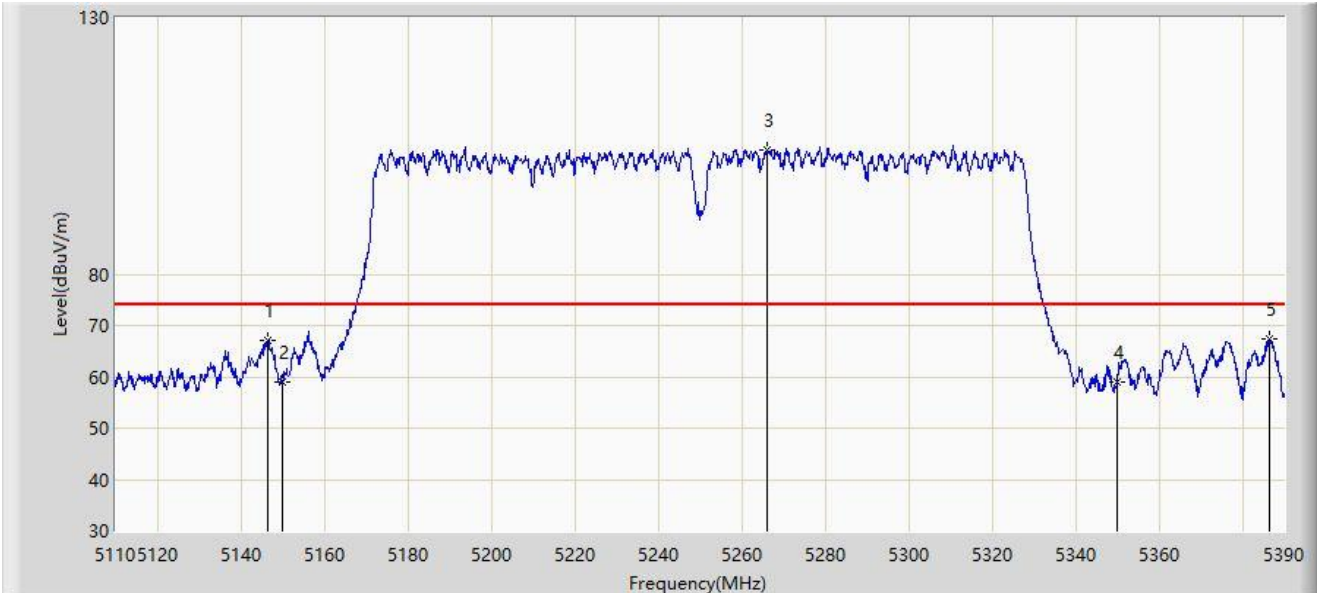


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5146.540	67.212	63.755	-6.788	74.000	3.457	PK
2		5150.000	58.997	55.515	-15.003	74.000	3.482	PK
3		5266.240	104.151	101.381	N/A	N/A	2.770	PK
4		5350.000	58.978	56.158	-15.022	74.000	2.820	PK
5	*	5386.360	67.484	64.282	-6.516	74.000	3.202	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

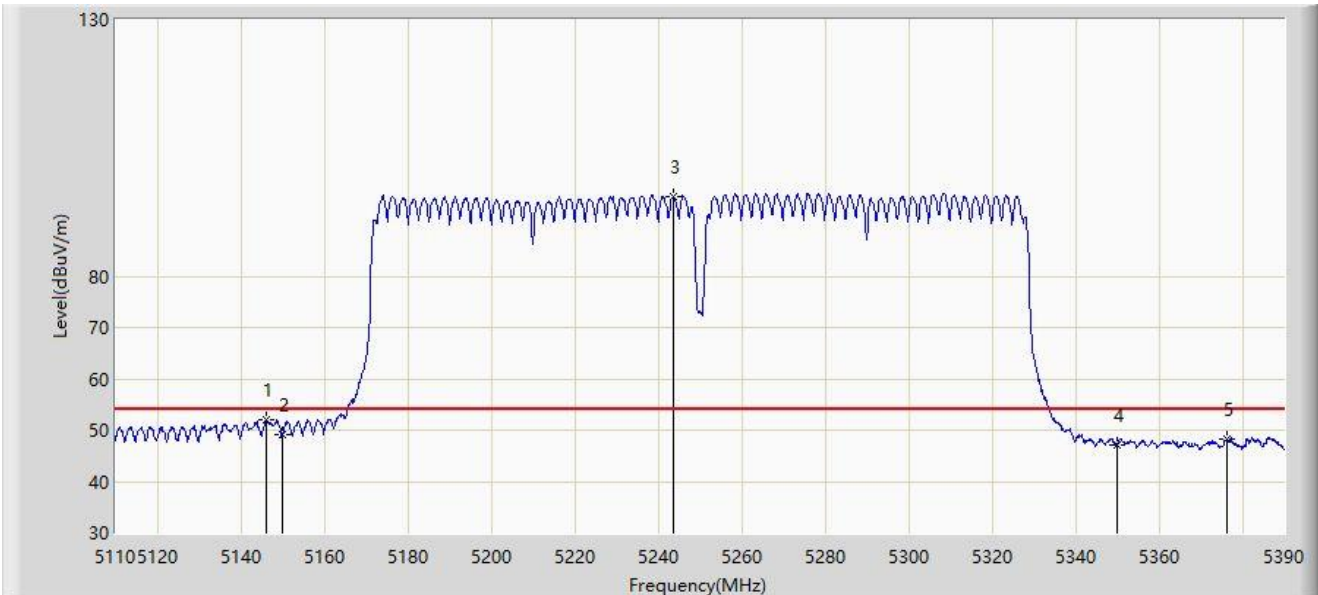


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5146.120	52.156	48.704	-1.844	54.000	3.452	AV
2		5150.000	49.218	45.736	-4.782	54.000	3.482	AV
3		5243.560	95.399	92.196	N/A	N/A	3.202	AV
4		5350.000	47.048	44.228	-6.952	54.000	2.820	AV
5		5376.280	48.255	45.252	-5.745	54.000	3.002	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

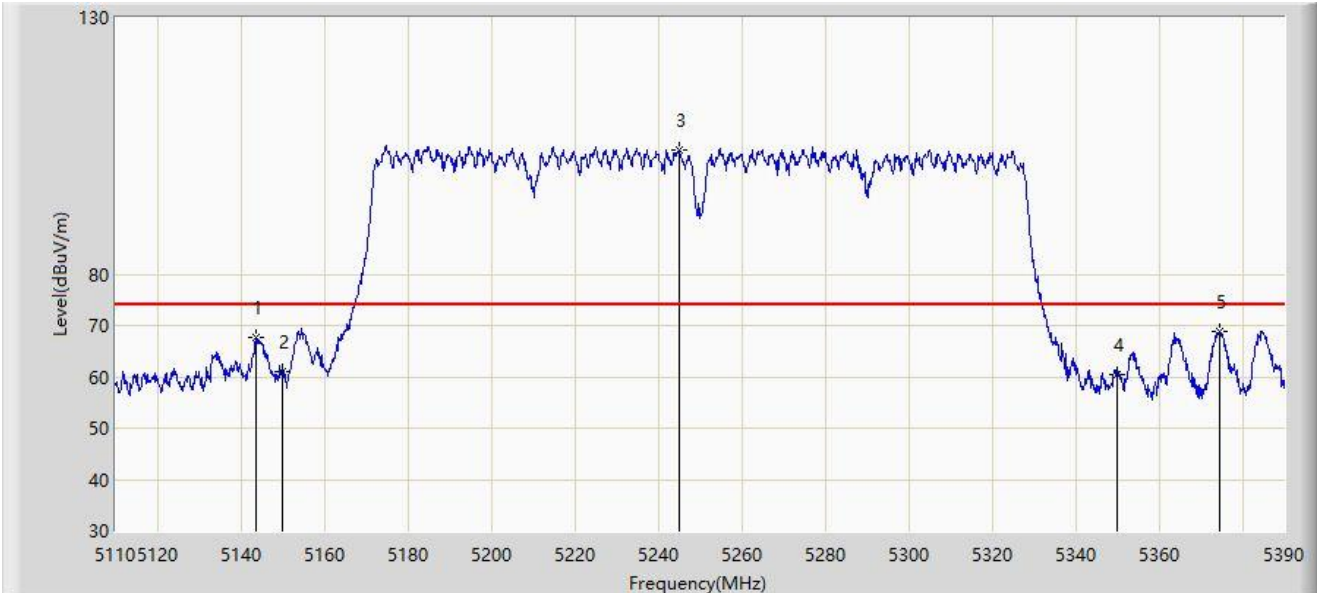


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5143.740	67.638	64.216	-6.362	74.000	3.422	PK
2		5150.000	61.146	57.664	-12.854	74.000	3.482	PK
3		5244.960	104.194	100.996	N/A	N/A	3.197	PK
4		5350.000	60.561	57.741	-13.439	74.000	2.820	PK
5	*	5374.460	68.769	65.802	-5.231	74.000	2.966	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

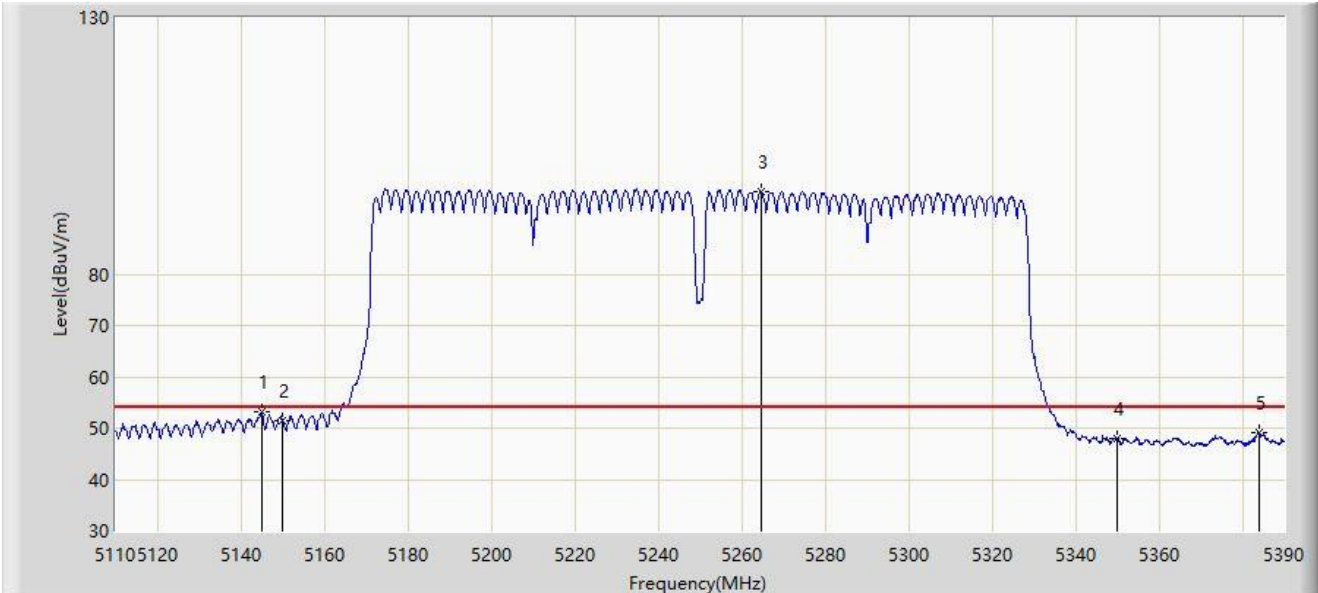


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5145.000	53.153	49.715	-0.847	54.000	3.437	AV
2		5150.000	51.531	48.049	-2.469	54.000	3.482	AV
3		5264.700	96.126	93.306	N/A	N/A	2.819	AV
4		5350.000	47.845	45.025	-6.155	54.000	2.820	AV
5		5383.980	49.151	45.998	-4.849	54.000	3.153	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

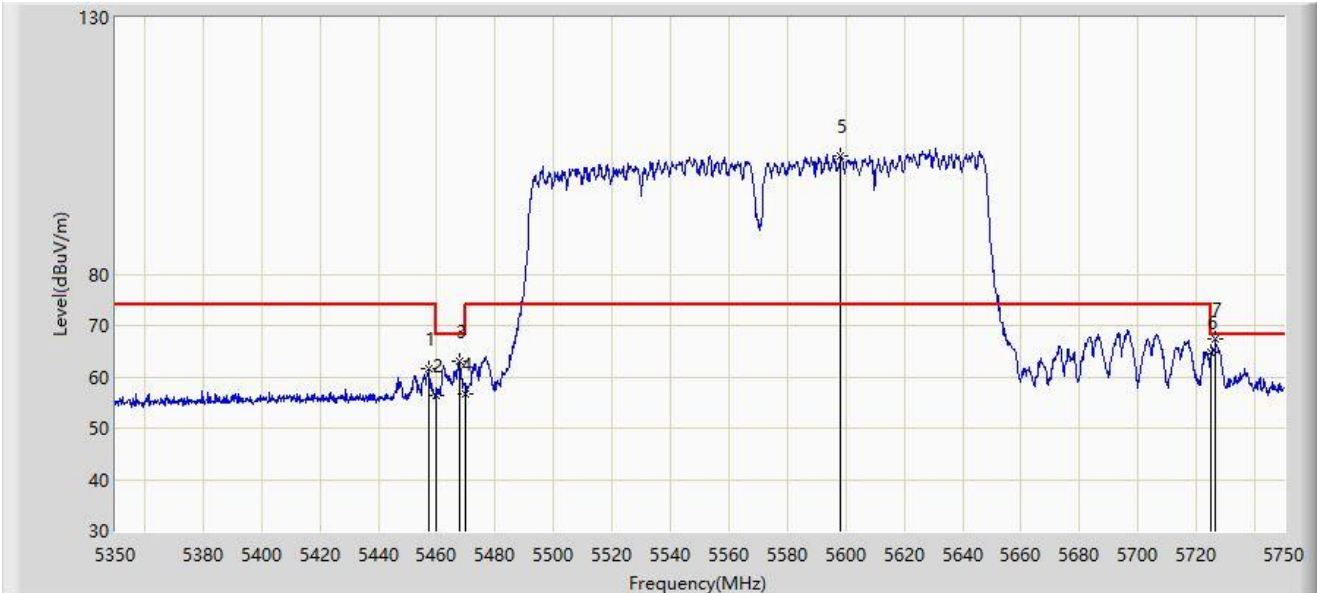


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5457.200	61.556	58.461	-12.444	74.000	3.095	PK
2		5460.000	56.454	53.305	-17.546	74.000	3.149	PK
3		5467.800	62.969	59.669	-5.231	68.200	3.300	PK
4		5470.000	56.678	53.336	-11.522	68.200	3.341	PK
5		5598.200	103.179	99.688	N/A	N/A	3.491	PK
6		5725.000	64.751	60.048	-3.449	68.200	4.703	PK
7	*	5726.400	67.262	62.555	-0.938	68.200	4.707	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

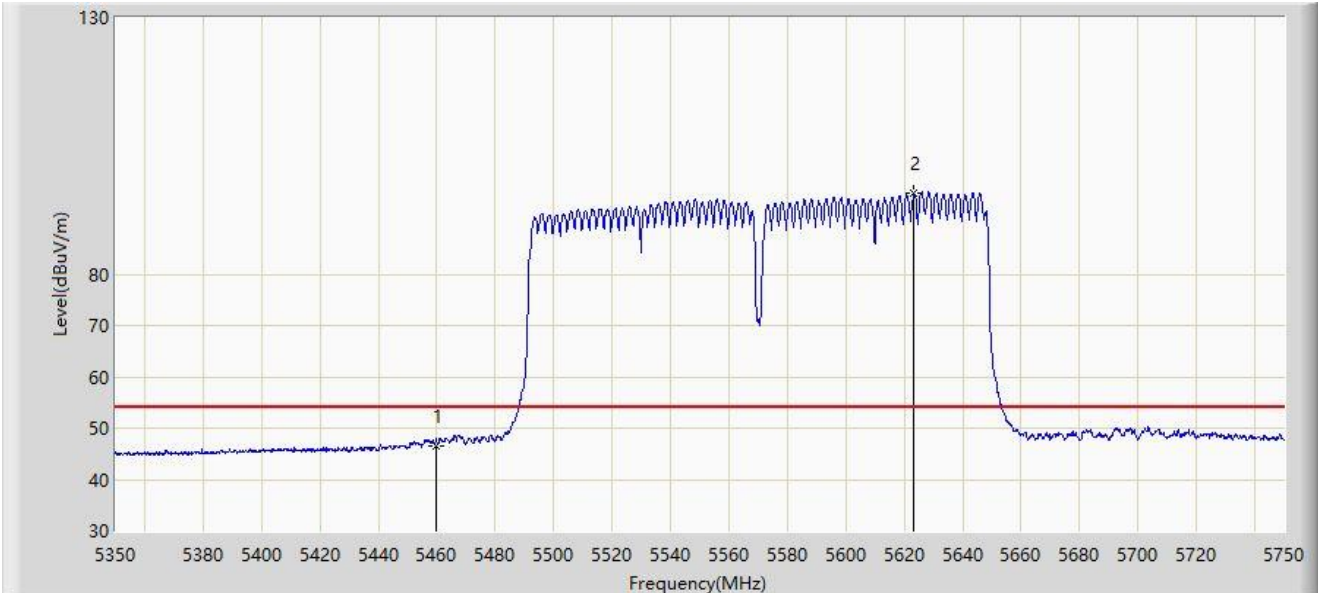


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5460.000	46.654	43.505	-7.346	54.000	3.149	AV
2		5623.400	95.688	91.749	N/A	N/A	3.939	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

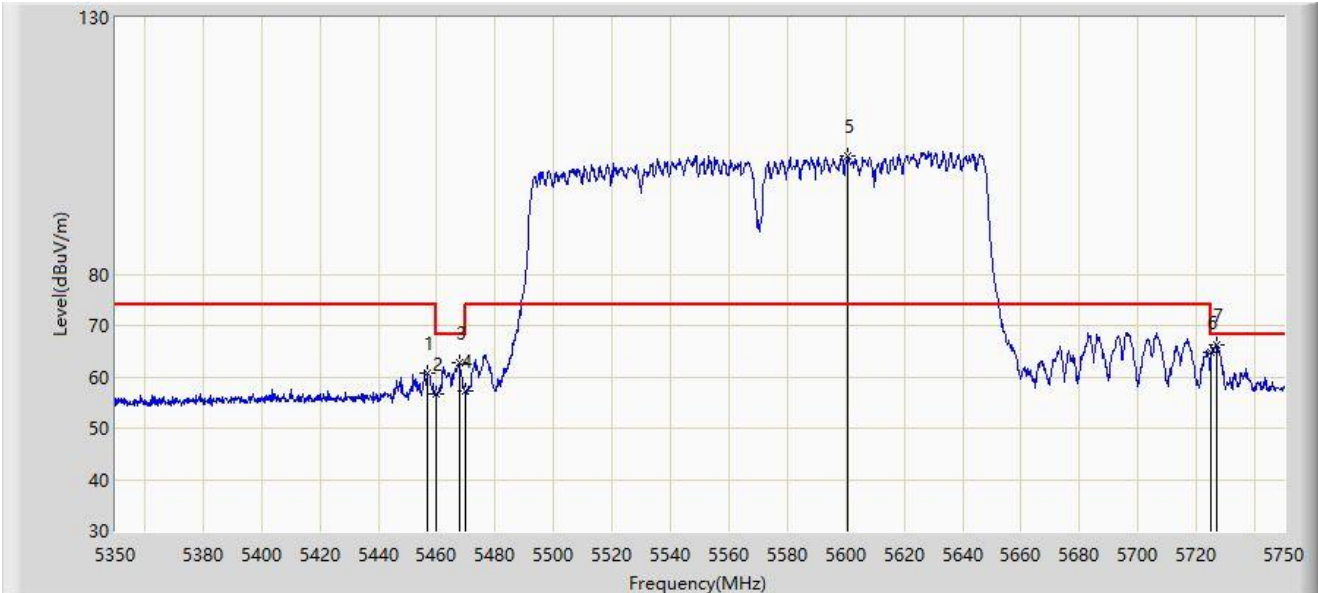


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.000	60.832	57.741	-13.168	74.000	3.091	PK
2		5460.000	56.566	53.417	-17.434	74.000	3.149	PK
3		5467.600	62.853	59.557	-5.347	68.200	3.295	PK
4		5470.000	57.126	53.784	-11.074	68.200	3.341	PK
5		5600.600	102.994	99.482	N/A	N/A	3.513	PK
6		5725.000	64.850	60.147	-3.350	68.200	4.703	PK
7	*	5726.800	66.298	61.597	-1.902	68.200	4.701	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

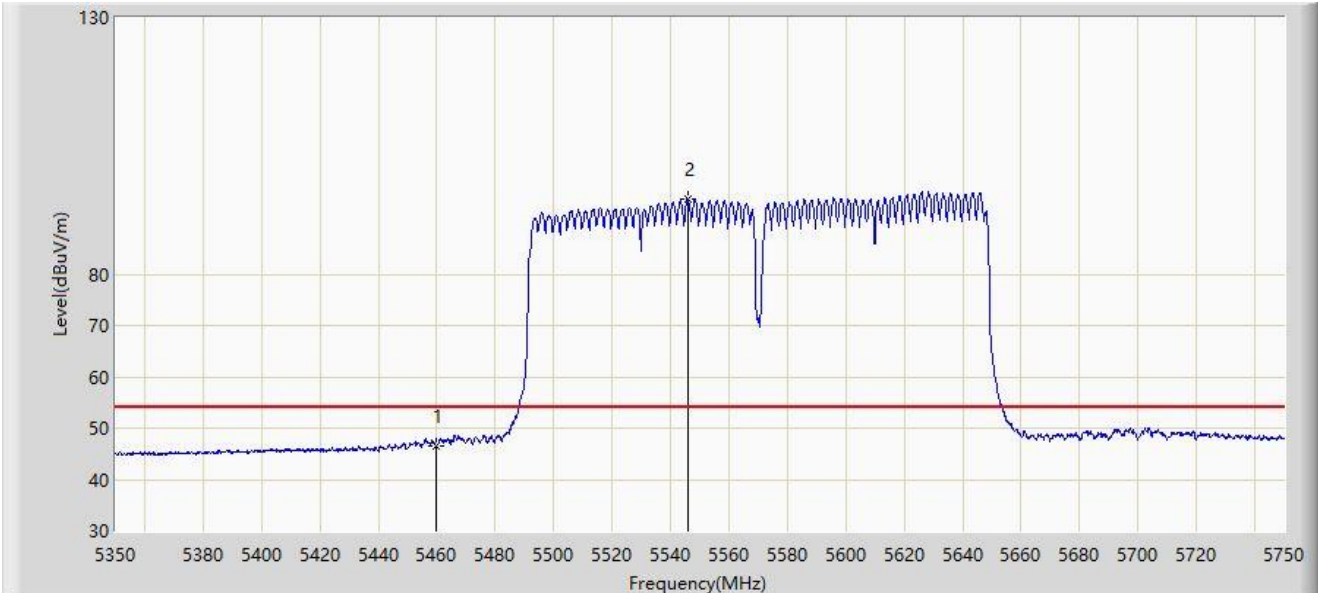


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5460.000	46.492	43.343	-7.508	54.000	3.149	AV
2		5545.800	94.617	91.236	N/A	N/A	3.381	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

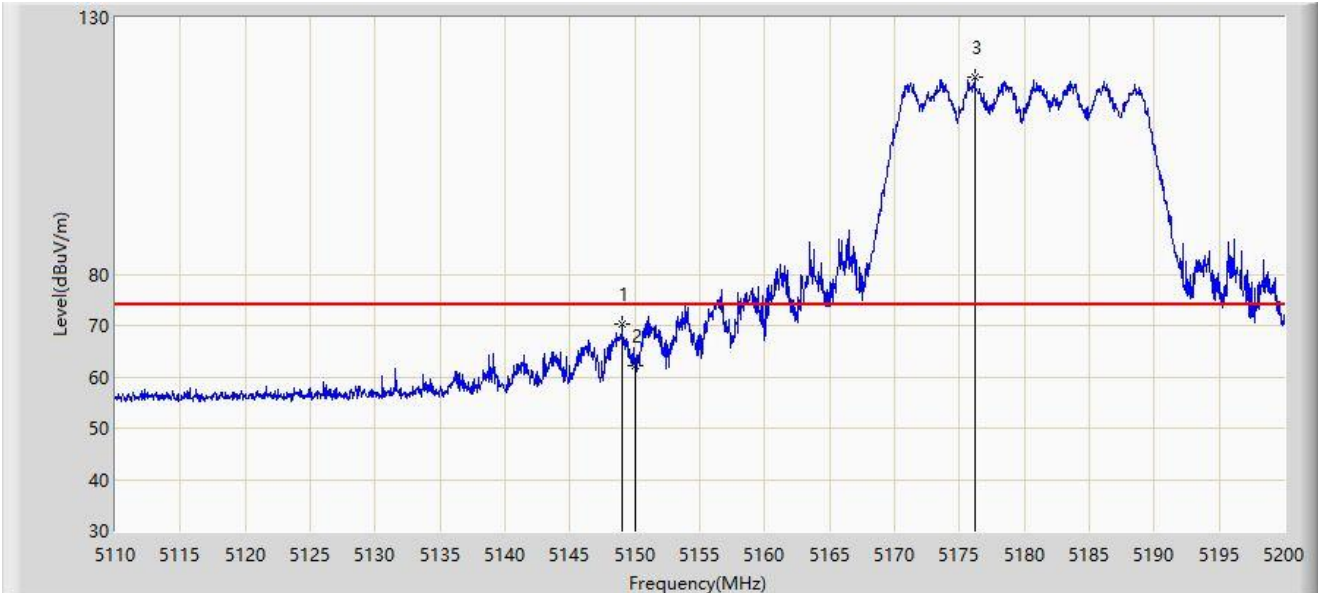


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.015	70.157	66.678	-3.843	74.000	3.479	PK
2		5150.000	62.095	58.613	-11.905	74.000	3.482	PK
3		5176.150	118.468	115.121	N/A	N/A	3.347	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

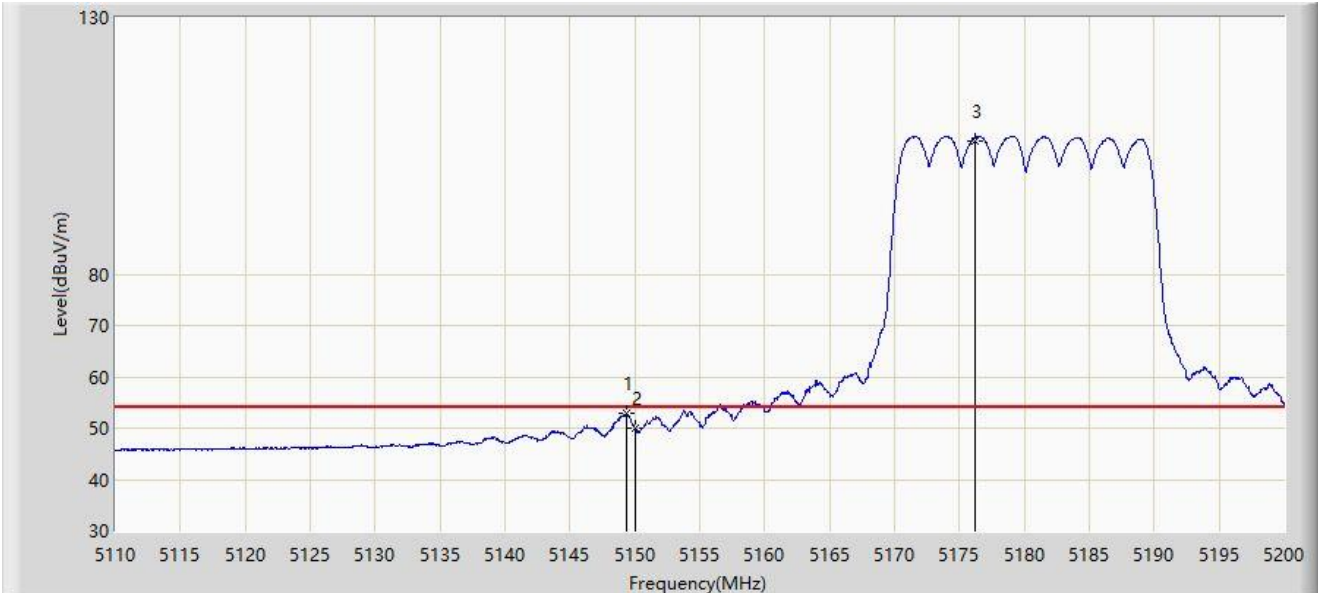


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.375	52.802	49.322	-1.198	54.000	3.480	AV
2		5150.000	49.984	46.502	-4.016	54.000	3.482	AV
3		5176.150	105.997	102.650	N/A	N/A	3.347	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

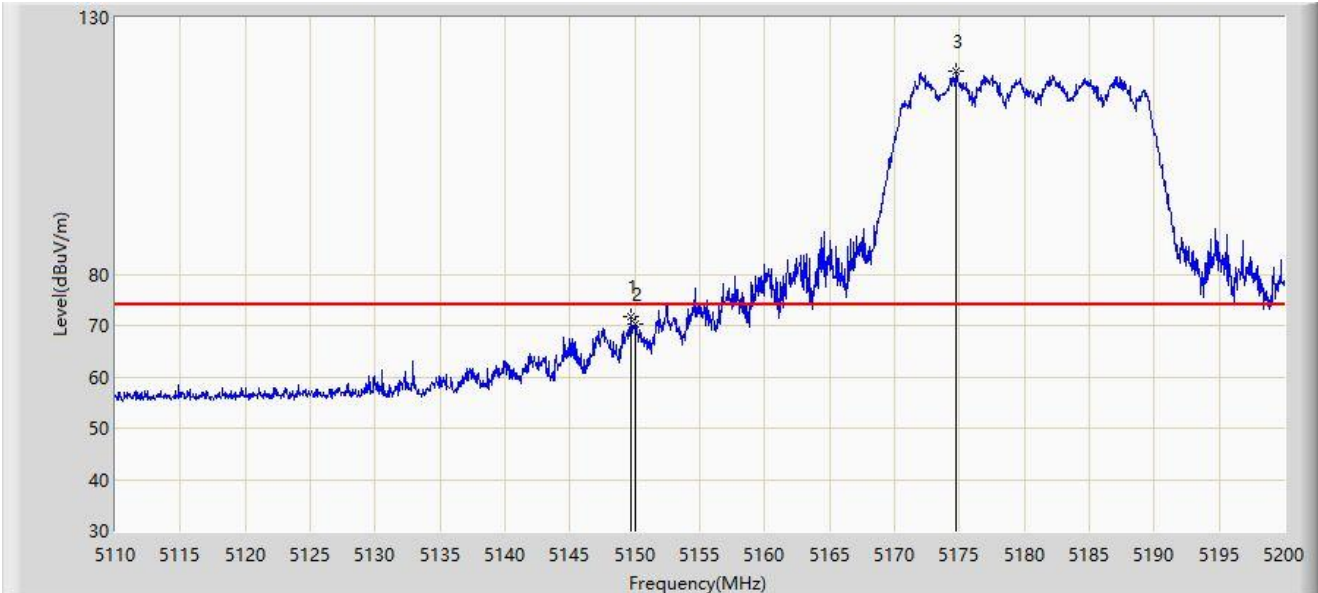


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.735	71.804	68.323	-2.196	74.000	3.481	PK
2		5150.000	70.230	66.748	-3.770	74.000	3.482	PK
3		5174.755	119.595	116.220	N/A	N/A	3.375	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

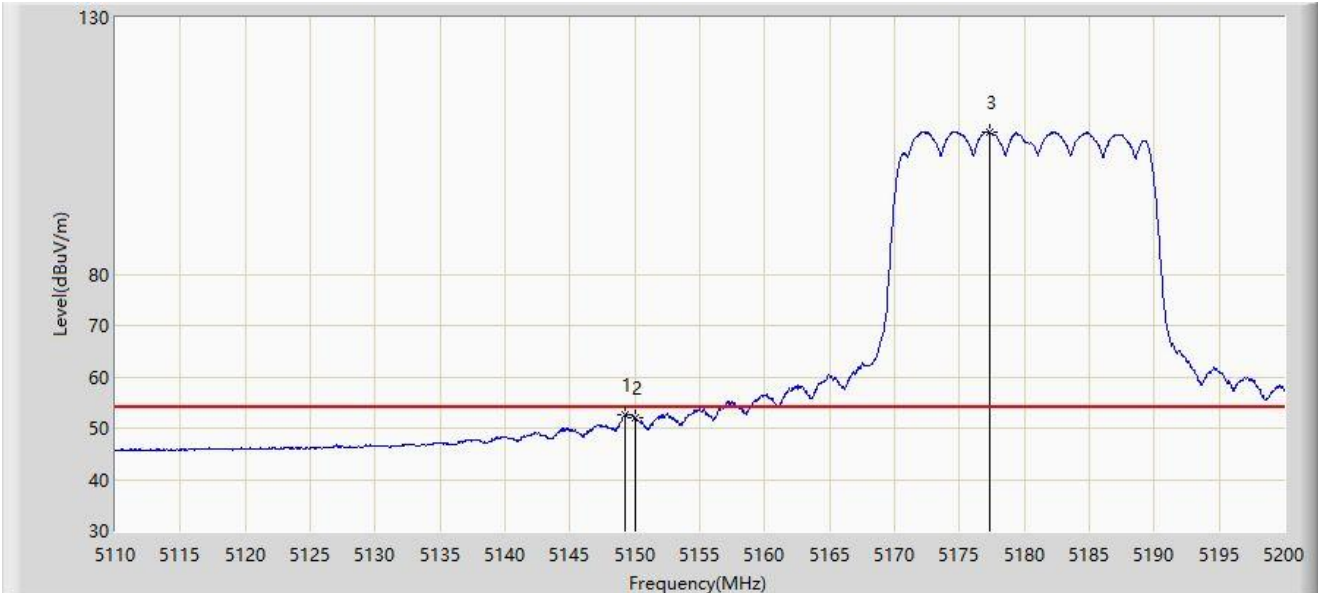


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.240	52.707	49.228	-1.293	54.000	3.479	AV
2		5150.000	52.071	48.589	-1.929	54.000	3.482	AV
3		5177.275	107.568	104.244	N/A	N/A	3.324	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-20
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

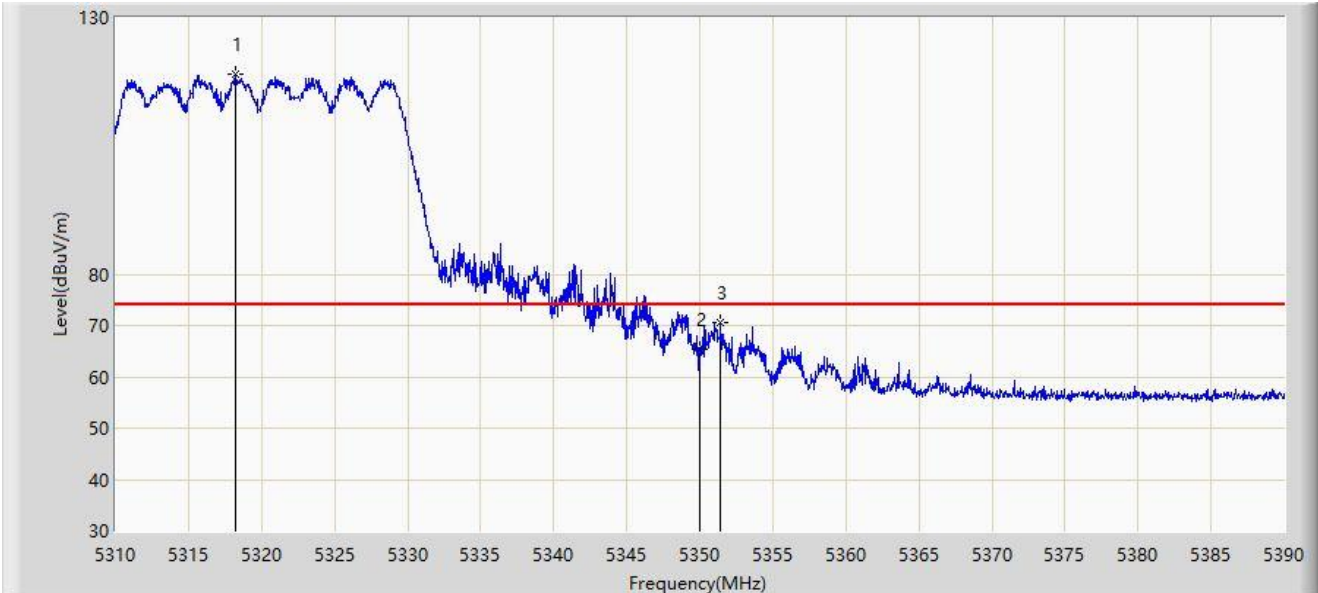


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5318.200	118.905	115.895	N/A	N/A	3.010	PK
2		5350.000	65.420	62.600	-8.580	74.000	2.820	PK
3	*	5351.400	70.552	67.756	-3.448	74.000	2.796	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-20
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

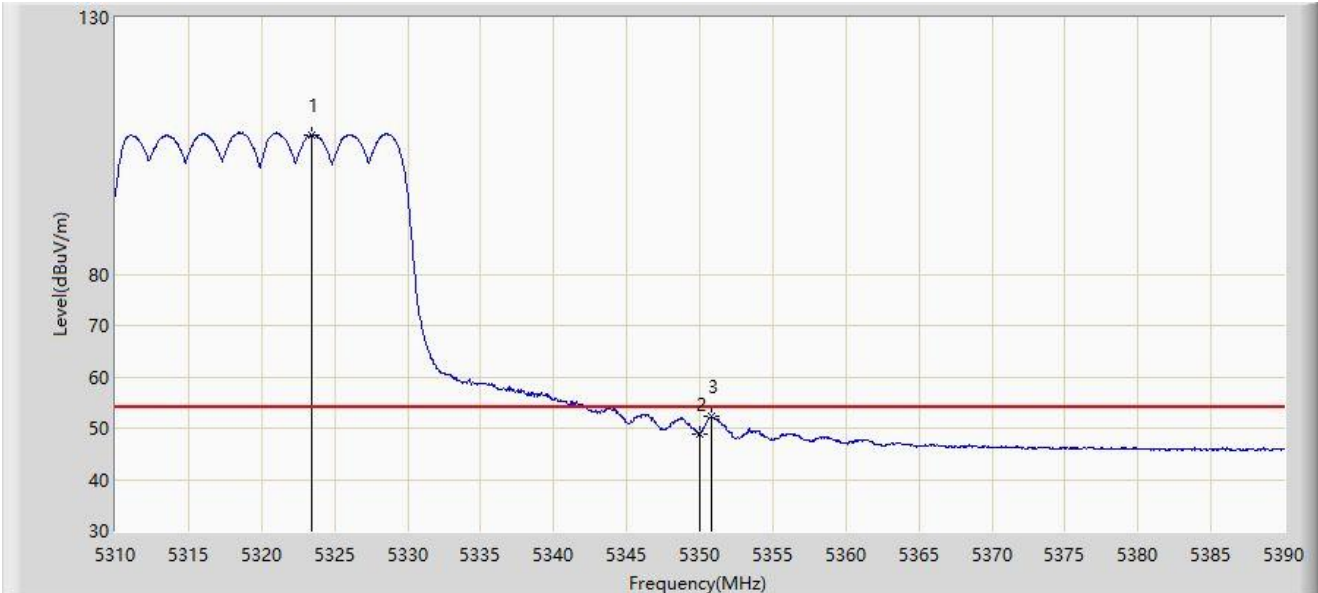


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5323.440	107.184	104.182	N/A	N/A	3.002	AV
2		5350.000	48.885	46.065	-5.115	54.000	2.820	AV
3	*	5350.800	52.308	49.502	-1.692	54.000	2.806	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-20
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

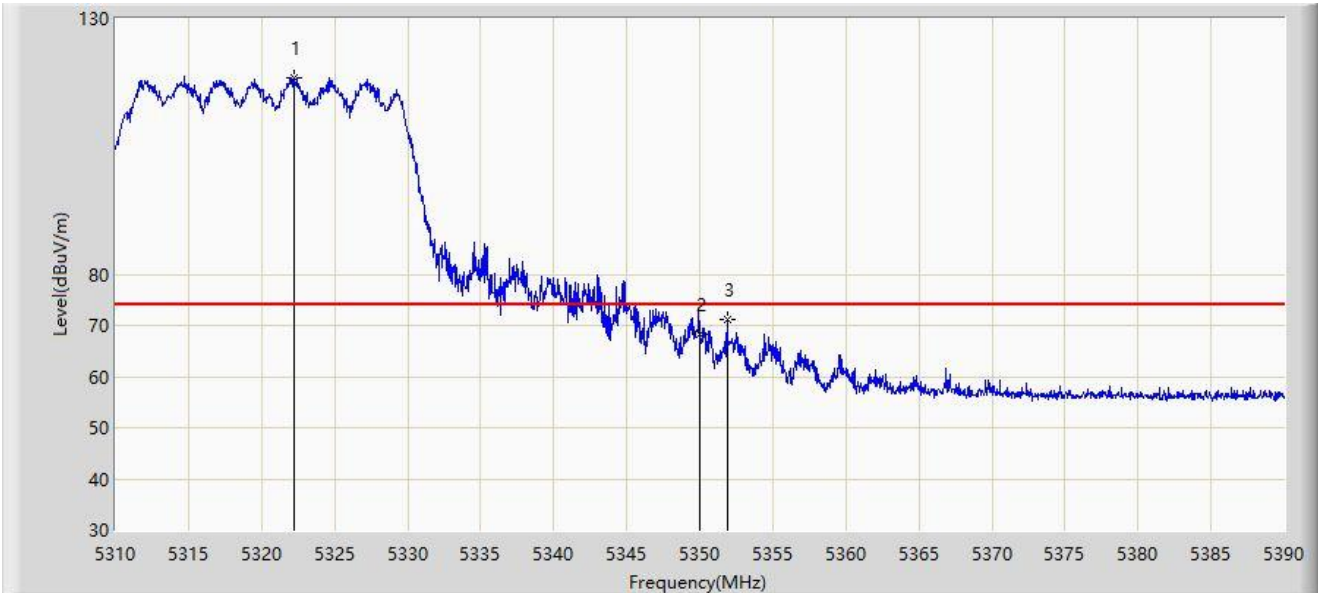


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5322.240	118.542	115.539	N/A	N/A	3.003	PK
2		5350.000	68.122	65.302	-5.878	74.000	2.820	PK
3	*	5351.880	71.107	68.319	-2.893	74.000	2.789	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-19
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

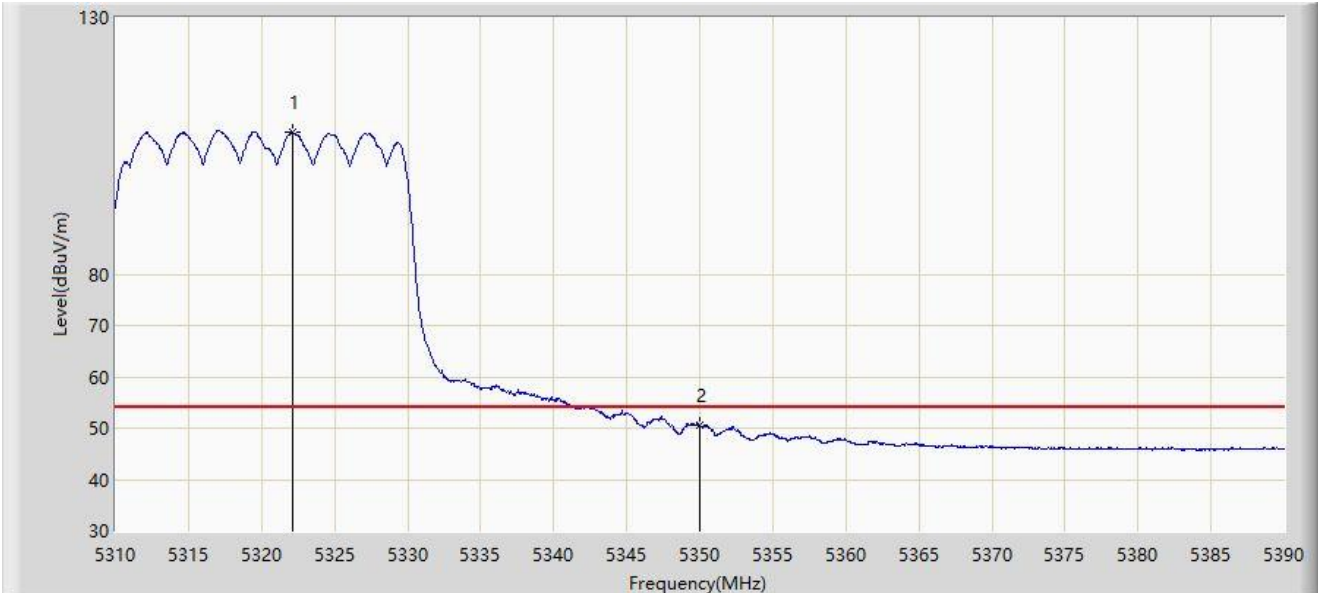


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5322.120	107.808	104.804	N/A	N/A	3.004	AV
2	*	5350.000	50.502	47.682	-3.498	54.000	2.820	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-20
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

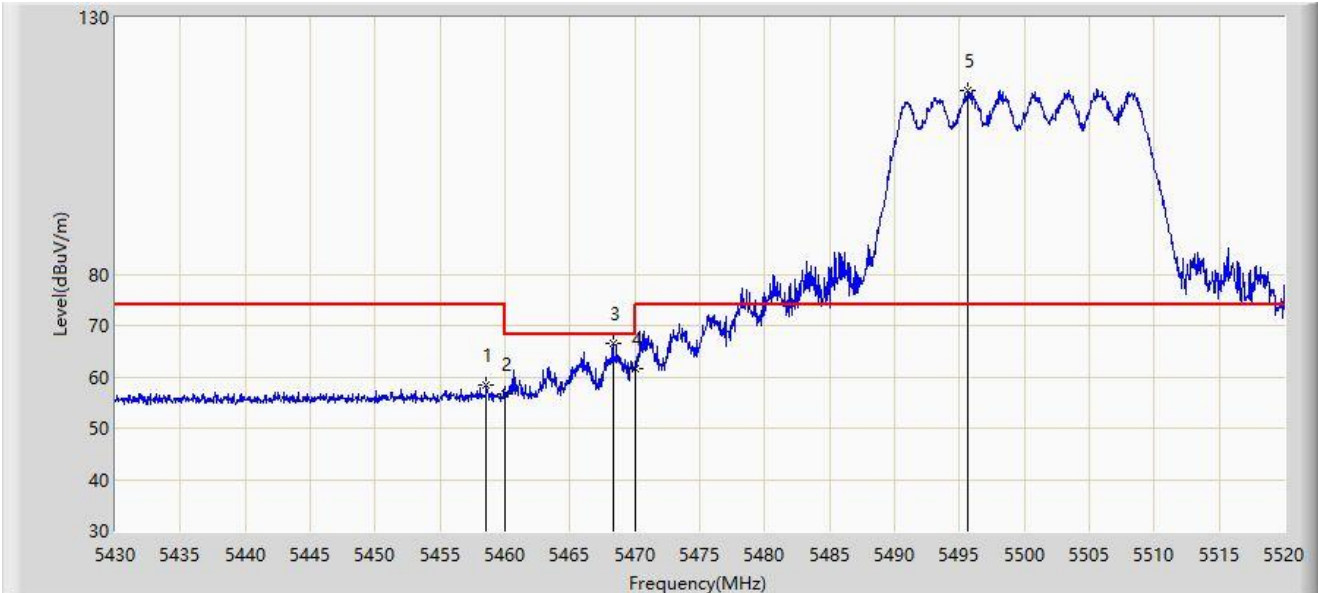


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.575	58.469	55.347	-15.531	74.000	3.122	PK
2		5460.000	56.611	53.462	-17.389	74.000	3.149	PK
3	*	5468.295	66.605	63.296	-1.595	68.200	3.309	PK
4		5470.000	61.504	58.162	-6.696	68.200	3.341	PK
5		5495.655	115.881	112.665	N/A	N/A	3.217	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-20
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

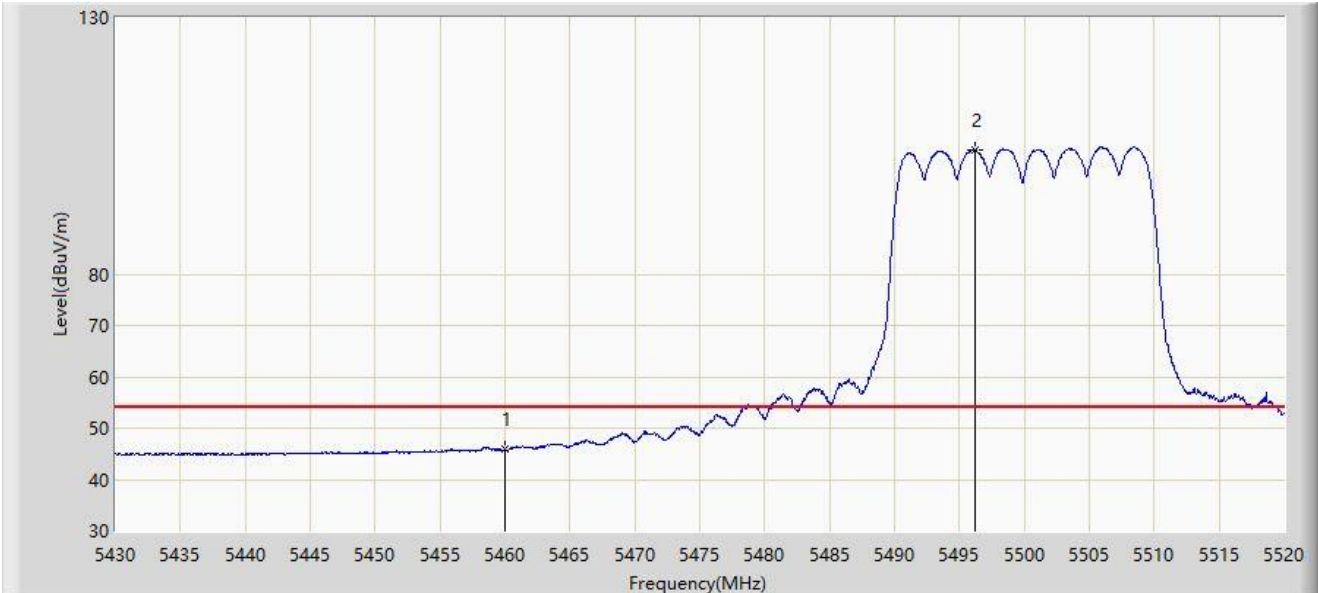


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	45.868	42.719	-8.132	54.000	3.149	AV
2		5496.150	104.294	101.081	N/A	N/A	3.213	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-20
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

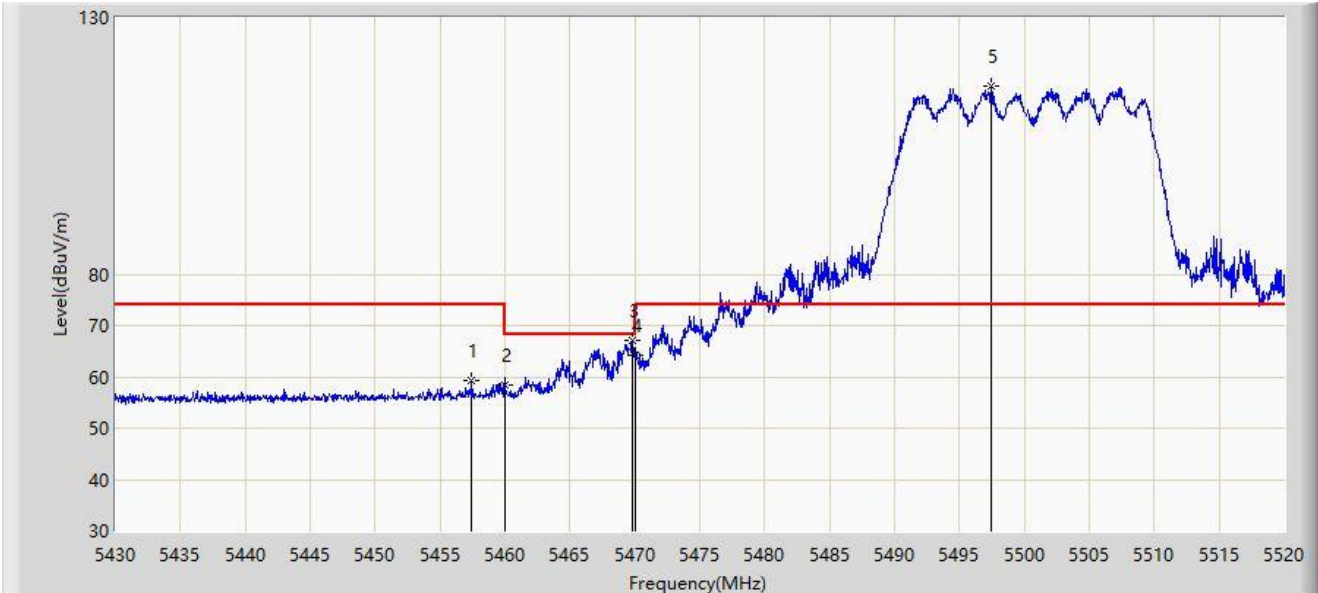


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5457.450	59.211	56.111	-14.789	74.000	3.100	PK
2		5460.000	58.328	55.179	-15.672	74.000	3.149	PK
3	*	5469.780	67.177	63.839	-1.023	68.200	3.338	PK
4		5470.000	64.329	60.987	-3.871	68.200	3.341	PK
5		5497.455	116.674	113.471	N/A	N/A	3.203	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-20
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

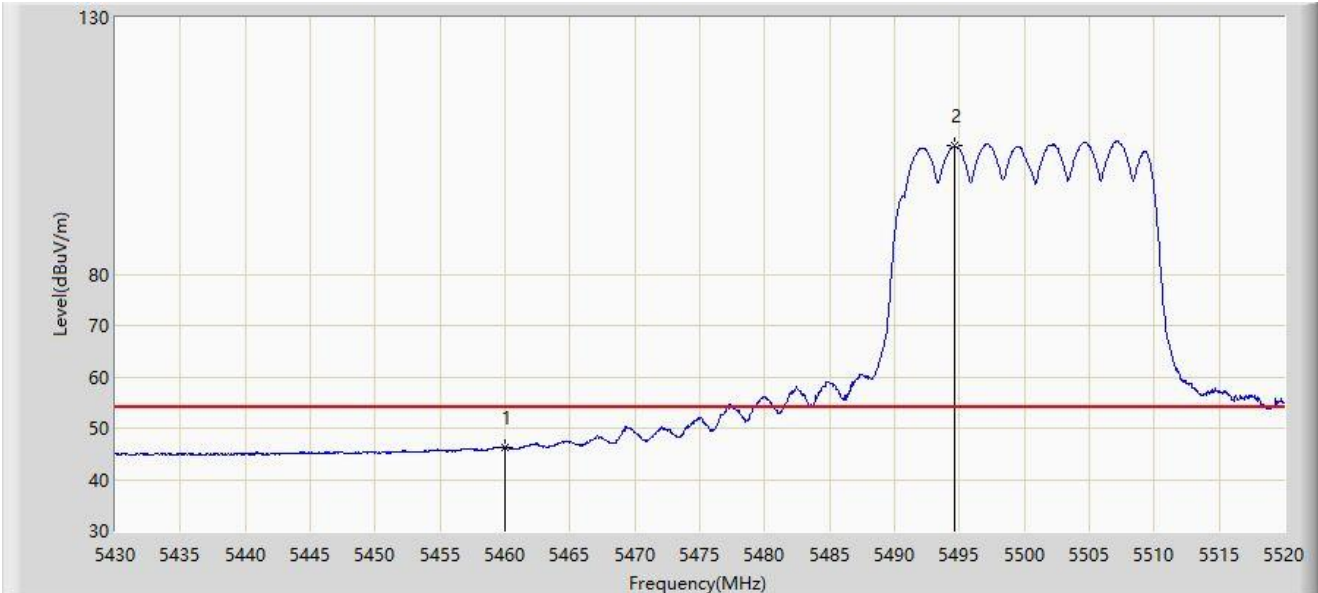


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	46.179	43.030	-7.821	54.000	3.149	AV
2		5494.620	105.013	101.790	N/A	N/A	3.223	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-20
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

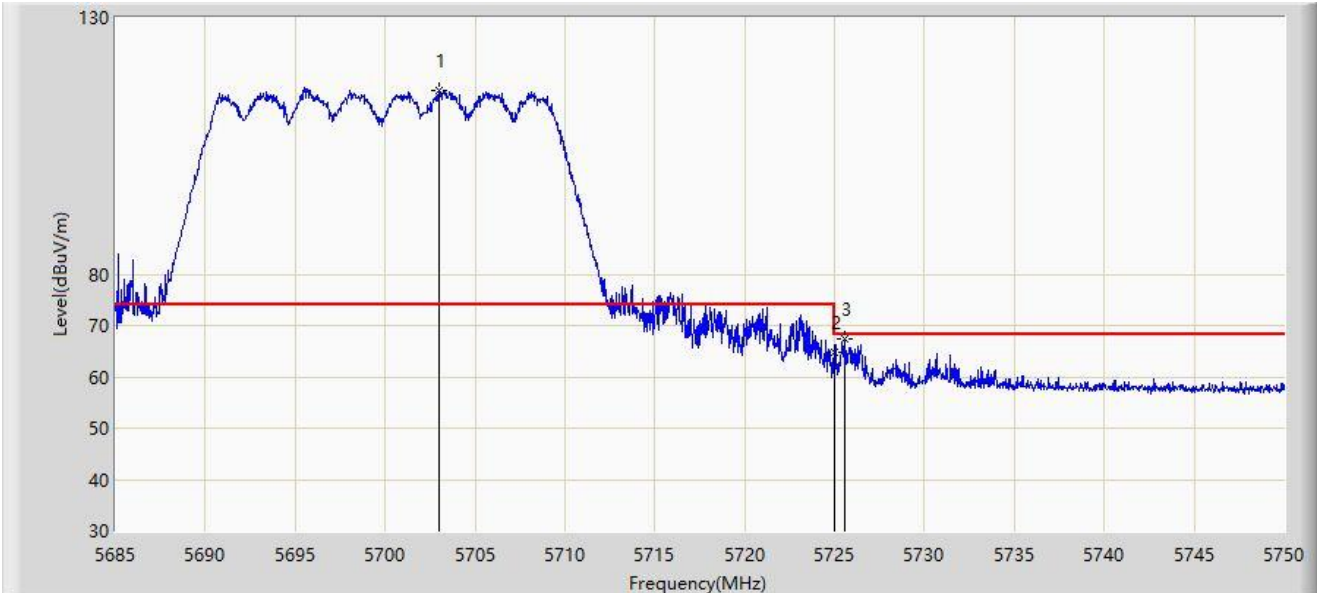


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5702.973	115.933	111.451	N/A	N/A	4.482	PK
2		5725.000	64.733	60.030	-3.467	68.200	4.703	PK
3	*	5725.560	67.442	62.734	-0.758	68.200	4.707	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-20
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

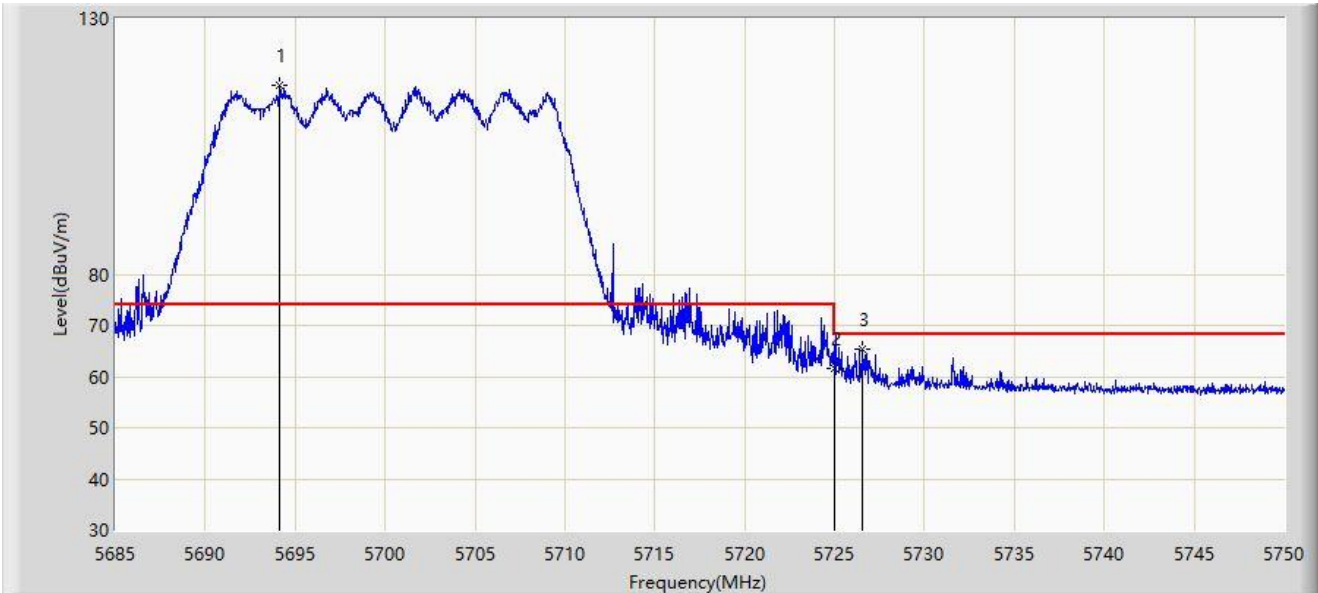


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5694.132	116.839	112.492	N/A	N/A	4.348	PK
2		5725.000	61.549	56.846	-6.651	68.200	4.703	PK
3	*	5726.535	65.366	60.660	-2.834	68.200	4.705	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-20
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

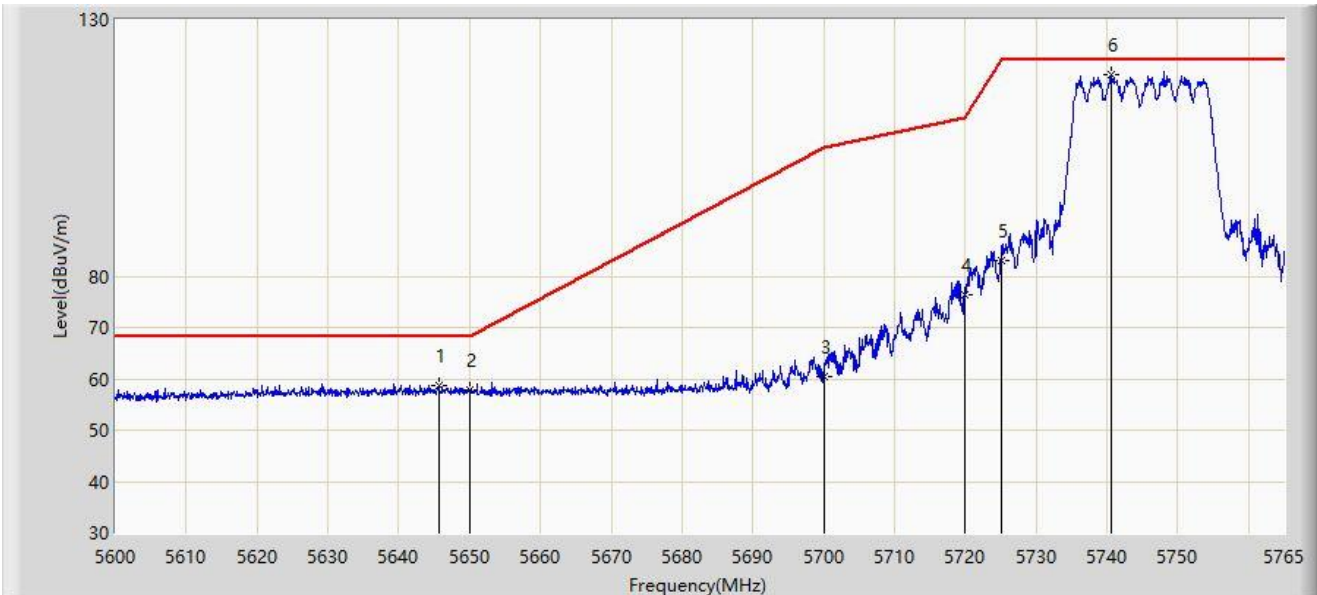


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5645.623	58.715	54.571	-9.485	68.200	4.144	PK
2		5650.000	57.912	53.789	-10.288	68.200	4.122	PK
3		5700.000	60.565	56.128	-44.635	105.200	4.437	PK
4		5720.000	76.488	71.824	-34.312	110.800	4.663	PK
5		5725.000	82.998	78.295	-39.202	122.200	4.703	PK
6		5740.580	119.360	114.903	N/A	N/A	4.457	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-20
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

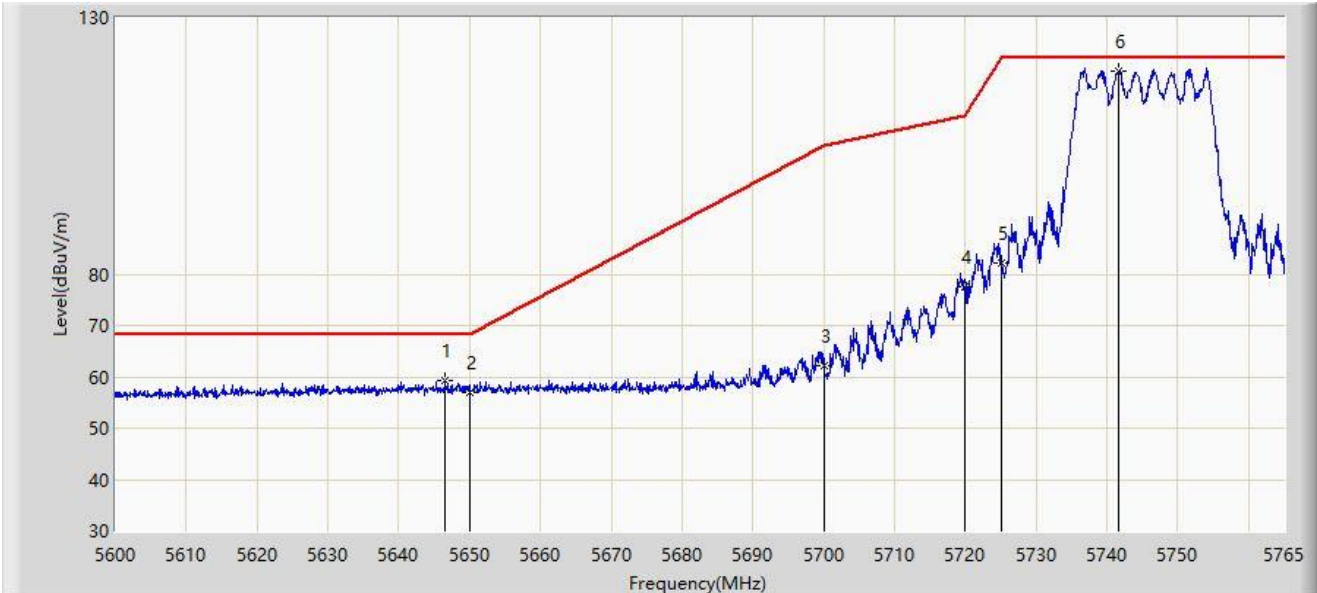


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5646.612	59.297	55.158	-8.903	68.200	4.140	PK
2		5650.000	56.861	52.738	-11.339	68.200	4.122	PK
3		5700.000	62.122	57.685	-43.078	105.200	4.437	PK
4		5720.000	77.454	72.790	-33.346	110.800	4.663	PK
5		5725.000	82.037	77.334	-40.163	122.200	4.703	PK
6		5741.570	119.671	115.232	N/A	N/A	4.440	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-20
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

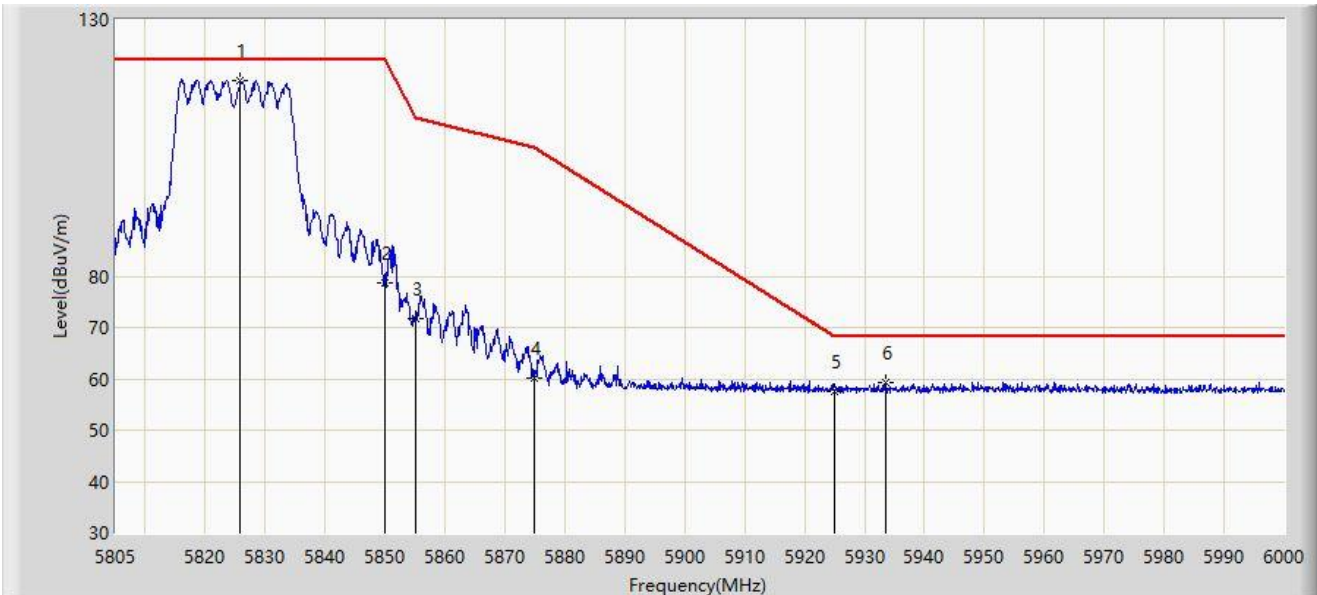


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5825.768	118.187	113.330	N/A	N/A	4.857	PK
2		5850.000	78.688	73.705	-43.512	122.200	4.984	PK
3		5855.000	71.653	66.615	-39.147	110.800	5.038	PK
4		5875.000	60.251	55.120	-44.949	105.200	5.131	PK
5		5925.000	57.655	52.420	-10.545	68.200	5.236	PK
6	*	5933.505	59.271	53.998	-8.929	68.200	5.273	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-20
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

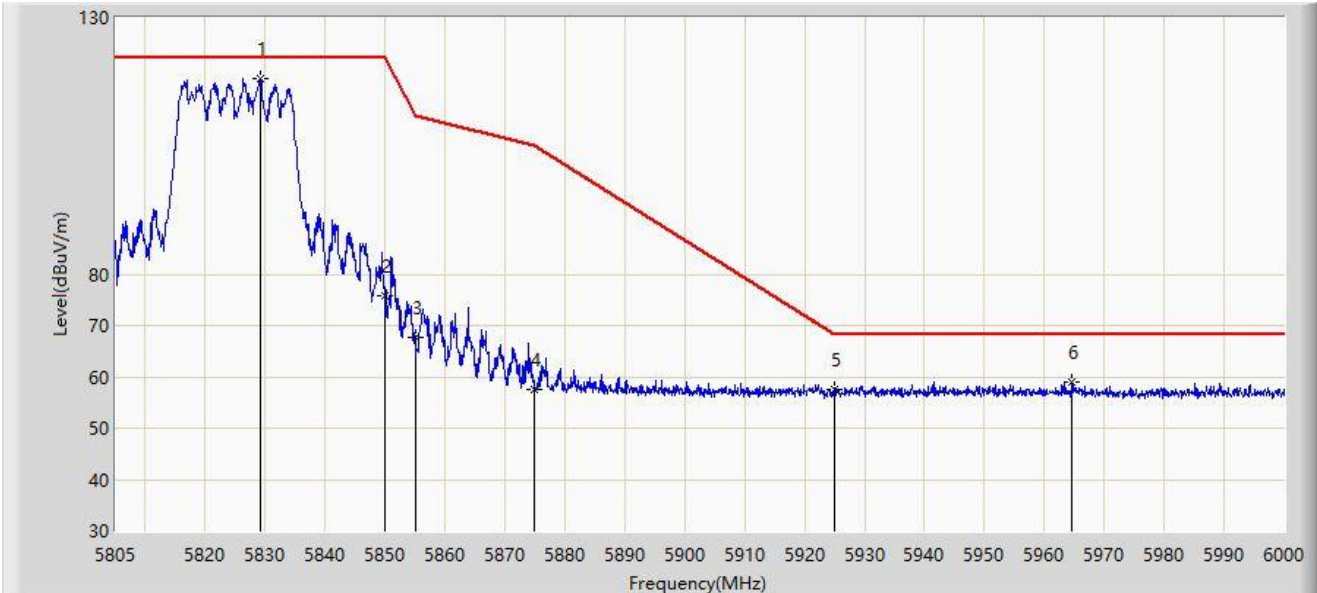


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5829.277	118.101	113.261	N/A	N/A	4.840	PK
2		5850.000	75.859	70.876	-46.341	122.200	4.984	PK
3		5855.000	67.620	62.582	-43.180	110.800	5.038	PK
4		5875.000	57.631	52.500	-47.569	105.200	5.131	PK
5		5925.000	57.416	52.181	-10.784	68.200	5.236	PK
6	*	5964.607	58.950	53.597	-9.250	68.200	5.353	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-20
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

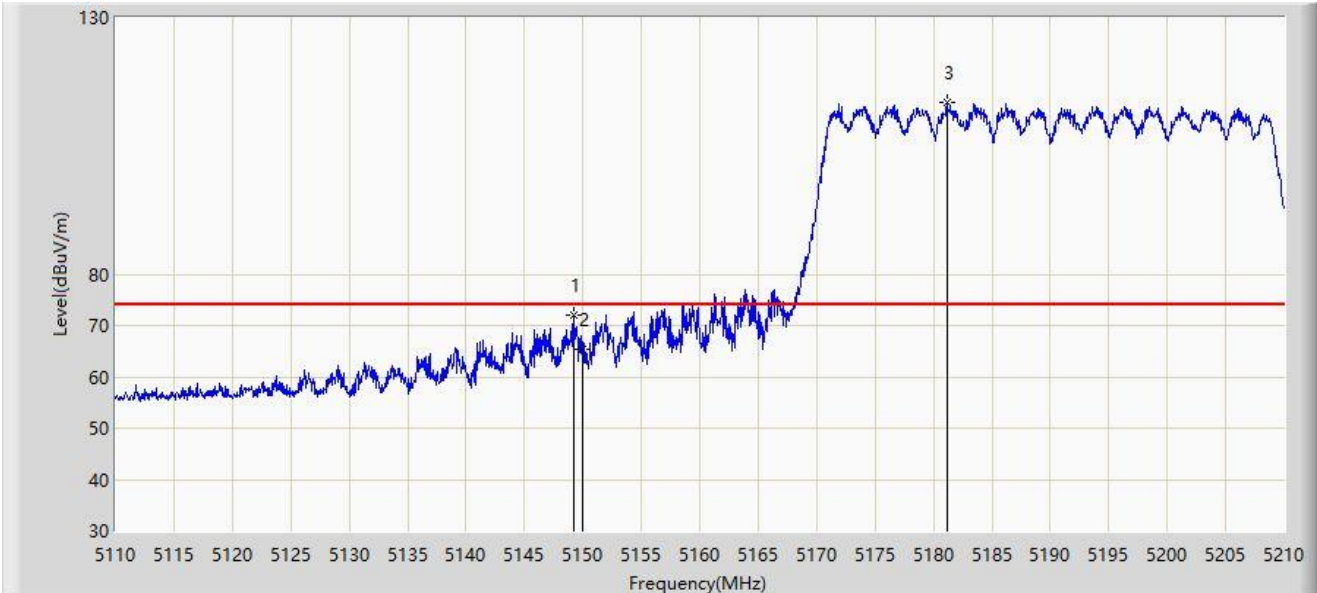


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.200	71.991	68.512	-2.009	74.000	3.479	PK
2		5150.000	65.246	61.764	-8.754	74.000	3.482	PK
3		5181.150	113.552	110.305	N/A	N/A	3.246	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-20
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

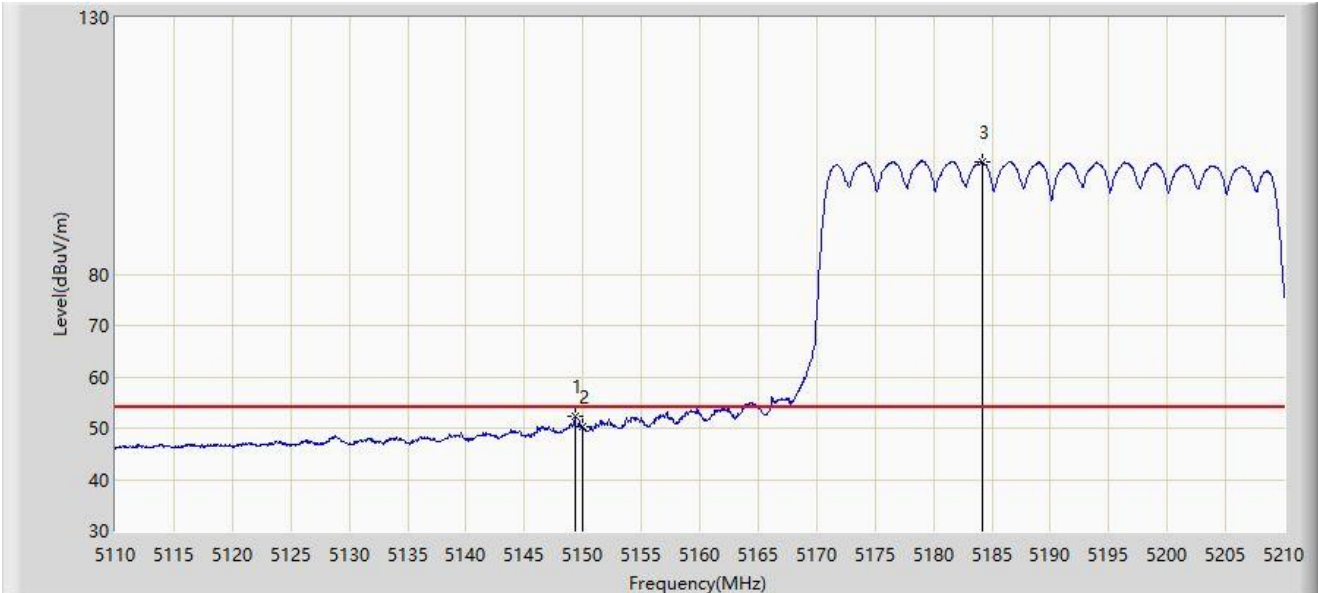


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.300	52.287	48.808	-1.713	54.000	3.479	AV
2		5150.000	50.240	46.758	-3.760	54.000	3.482	AV
3		5184.150	101.924	98.744	N/A	N/A	3.181	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-20
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

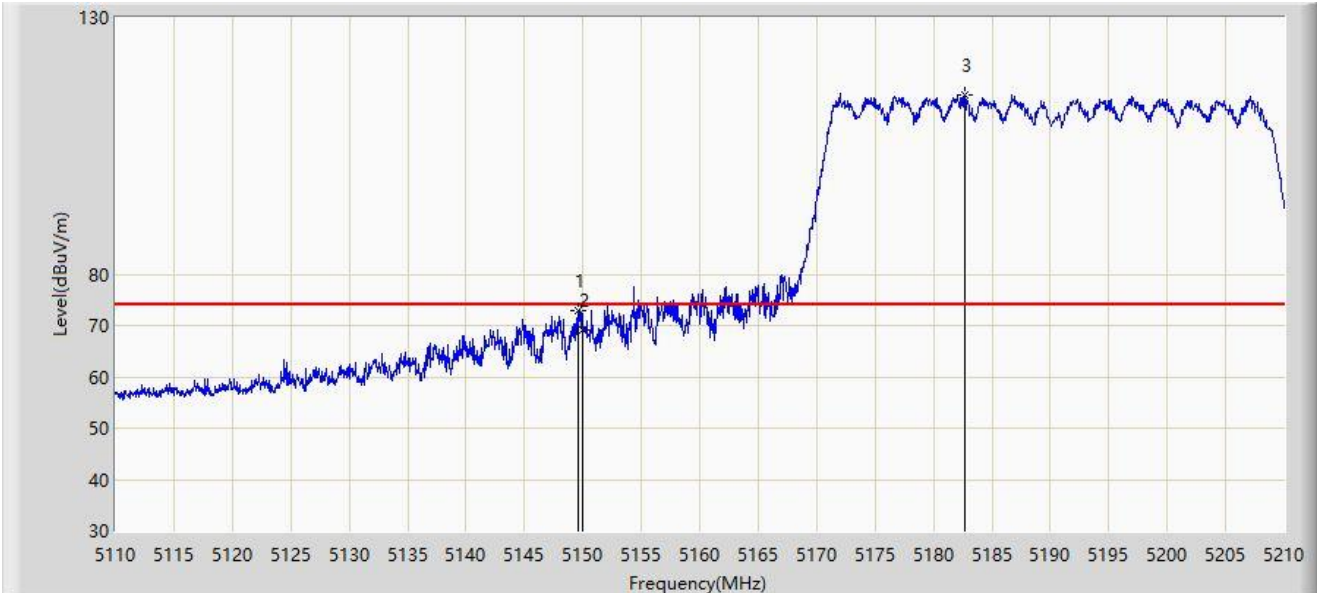


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.600	73.021	69.541	-0.979	74.000	3.480	PK
2		5150.000	69.031	65.549	-4.969	74.000	3.482	PK
3		5182.650	114.980	111.765	N/A	N/A	3.215	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-20
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

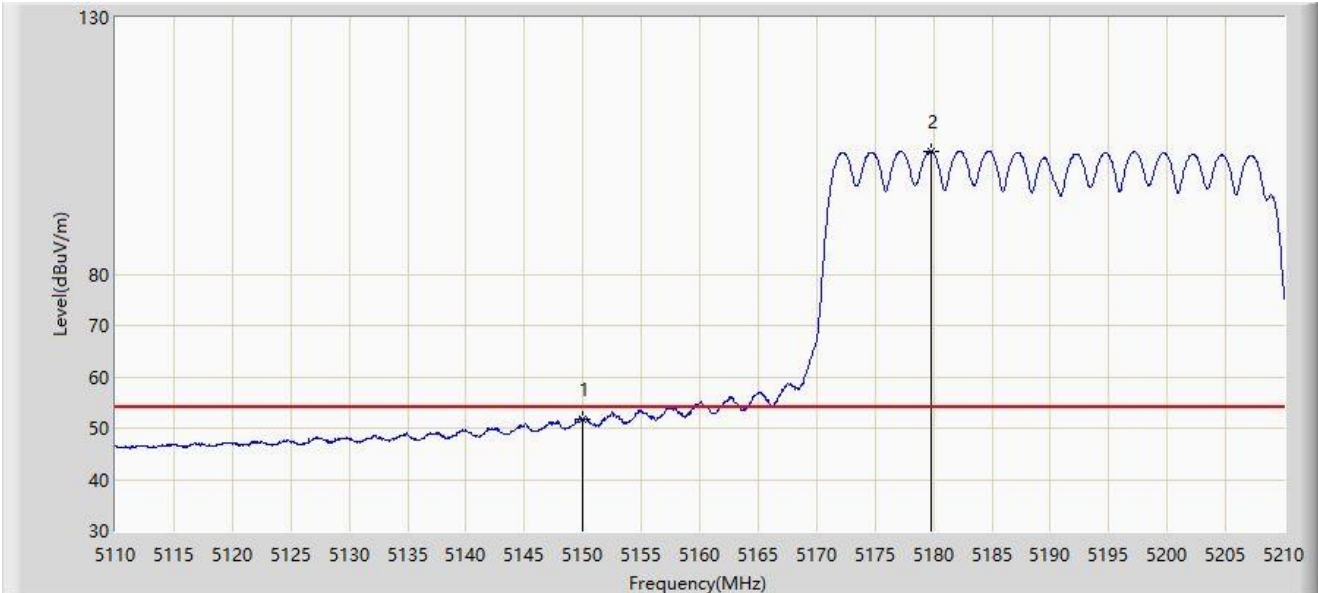


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5150.000	51.768	48.286	-2.232	54.000	3.482	AV
2		5179.800	103.899	100.625	N/A	N/A	3.274	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

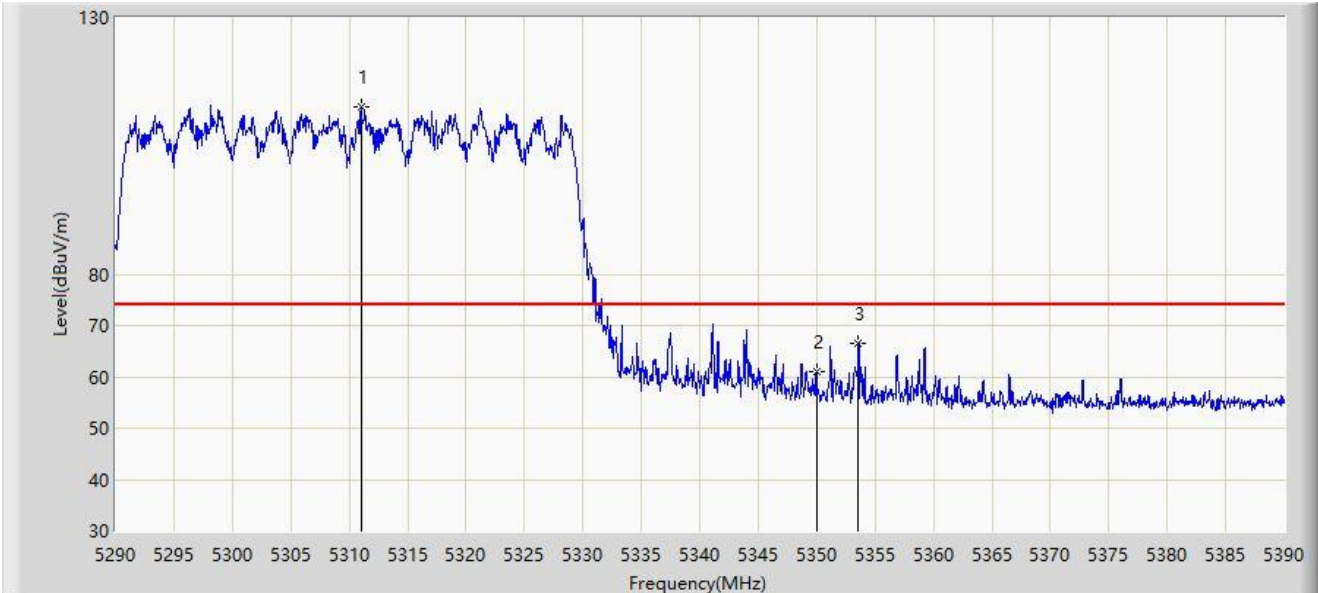


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5311.000	112.619	109.727	N/A	N/A	2.892	PK
2		5350.000	60.875	58.055	-13.125	74.000	2.820	PK
3	*	5353.550	66.612	63.819	-7.388	74.000	2.794	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

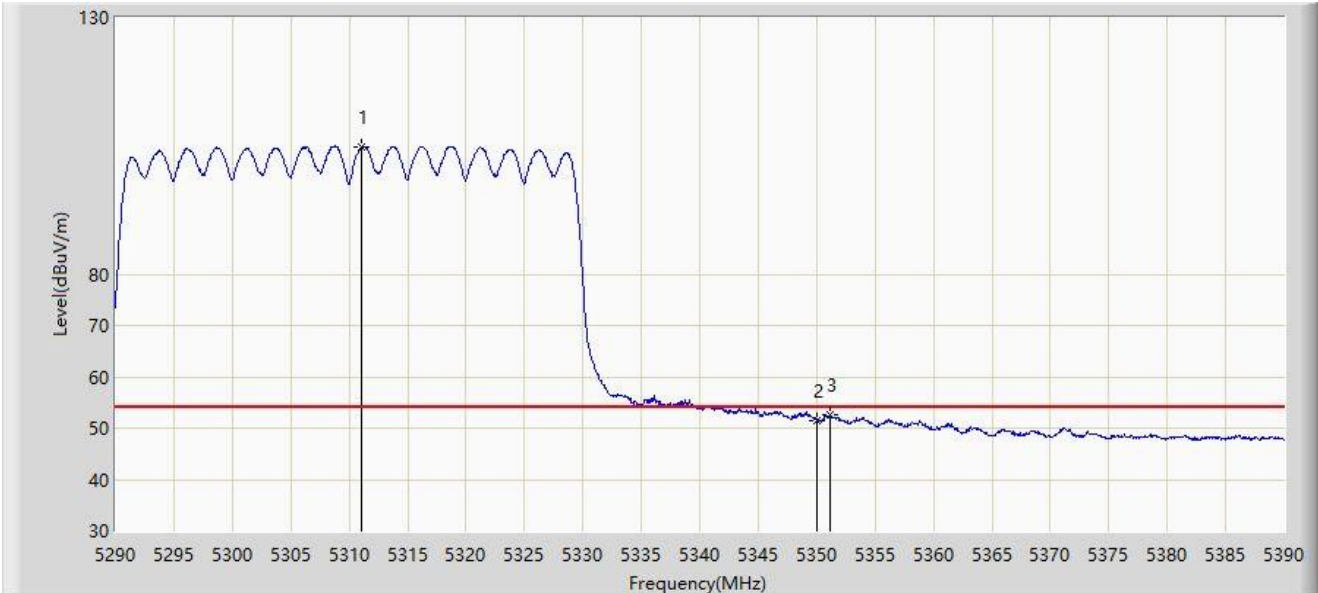


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5311.050	104.789	101.896	N/A	N/A	2.893	AV
2		5350.000	51.590	48.770	-2.410	54.000	2.820	AV
3	*	5351.150	52.481	49.681	-1.519	54.000	2.801	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

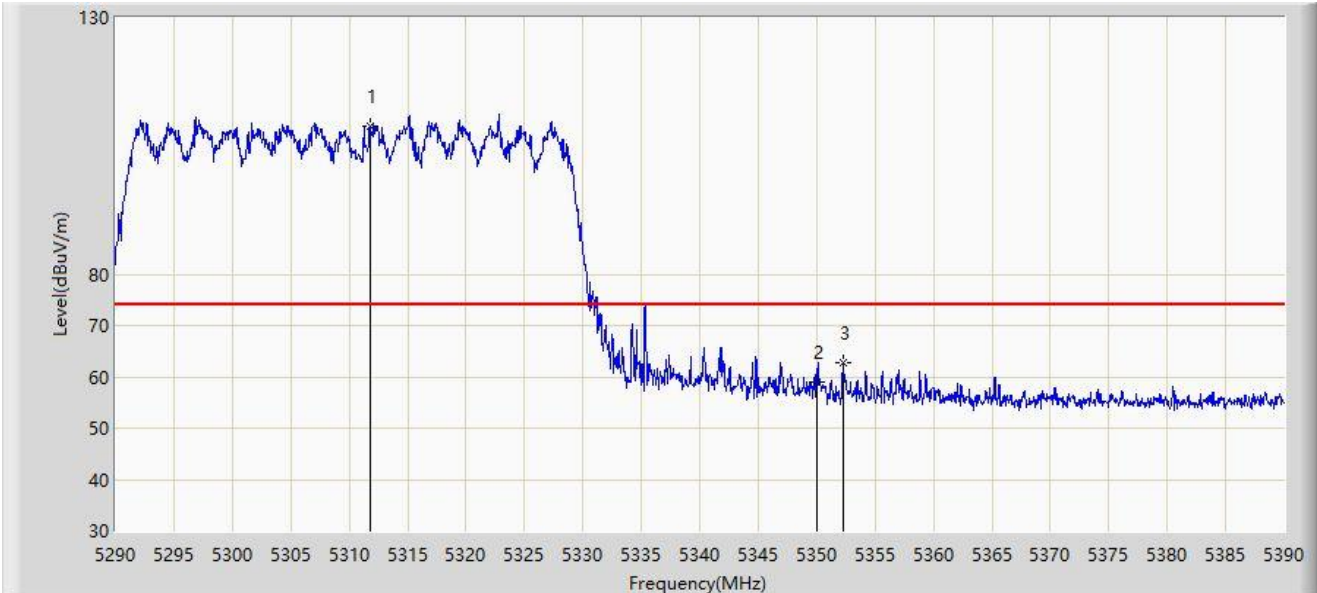


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5311.750	108.783	105.880	N/A	N/A	2.904	PK
2		5350.000	59.036	56.216	-14.964	74.000	2.820	PK
3	*	5352.250	62.797	60.010	-11.203	74.000	2.787	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

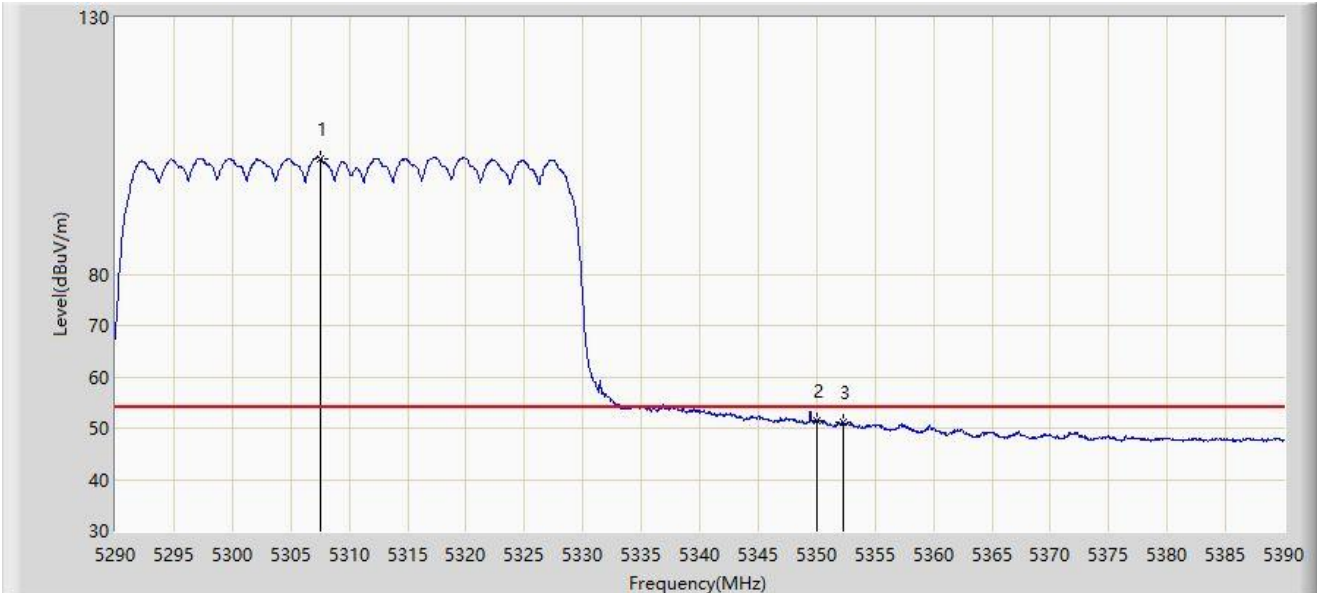


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5307.500	102.574	99.737	N/A	N/A	2.837	AV
2	*	5350.000	51.335	48.515	-2.665	54.000	2.820	AV
3		5352.250	51.285	48.498	-2.715	54.000	2.787	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

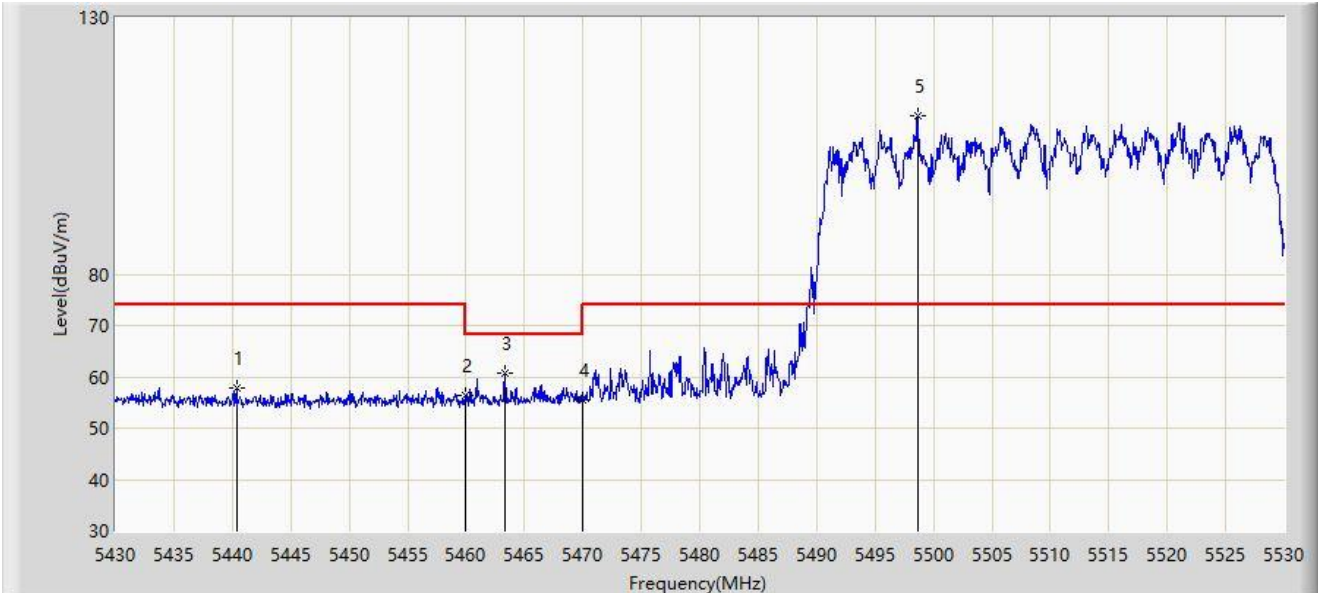


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5440.350	57.850	54.702	-16.150	74.000	3.148	PK
2		5460.000	56.238	53.089	-17.762	74.000	3.149	PK
3	*	5463.300	60.669	57.456	-7.531	68.200	3.213	PK
4		5470.000	55.402	52.060	-12.798	68.200	3.341	PK
5		5498.650	110.883	107.688	N/A	N/A	3.196	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

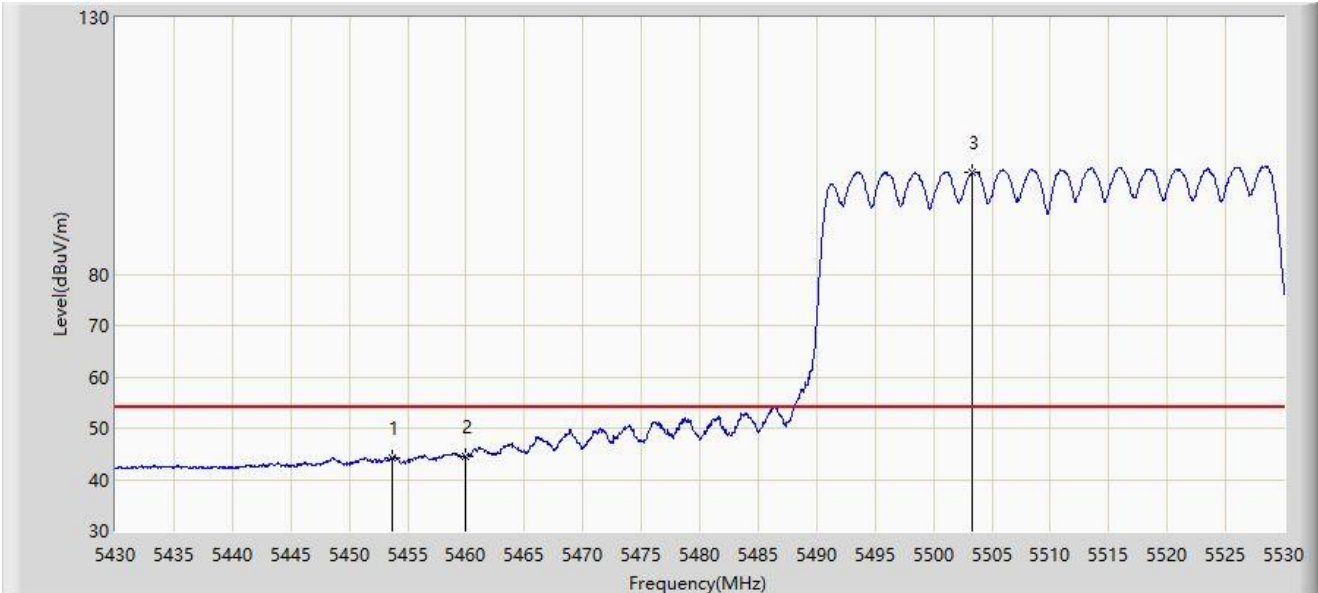


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5453.700	44.257	41.210	-9.743	54.000	3.046	AV
2	*	5460.000	44.433	41.284	-9.567	54.000	3.149	AV
3		5503.300	99.889	96.727	N/A	N/A	3.162	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

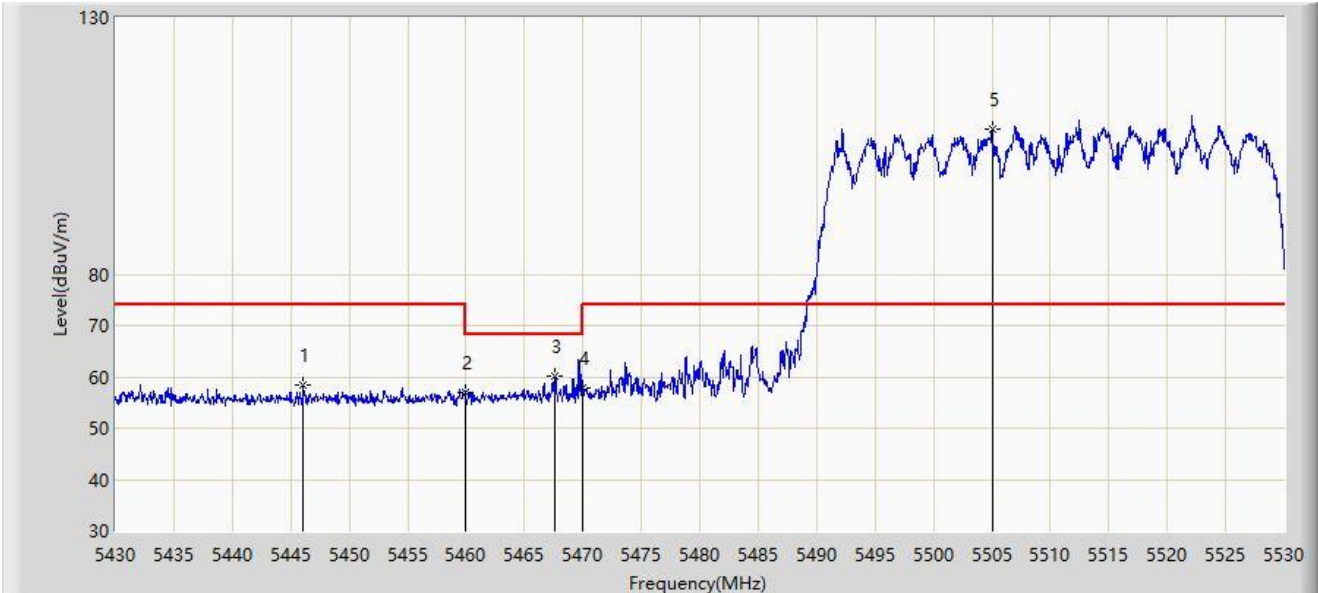


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5446.100	58.520	55.415	-15.480	74.000	3.105	PK
2		5460.000	56.971	53.822	-17.029	74.000	3.149	PK
3	*	5467.650	60.143	56.846	-8.057	68.200	3.297	PK
4		5470.000	57.815	54.473	-10.385	68.200	3.341	PK
5		5505.000	108.381	105.230	N/A	N/A	3.151	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

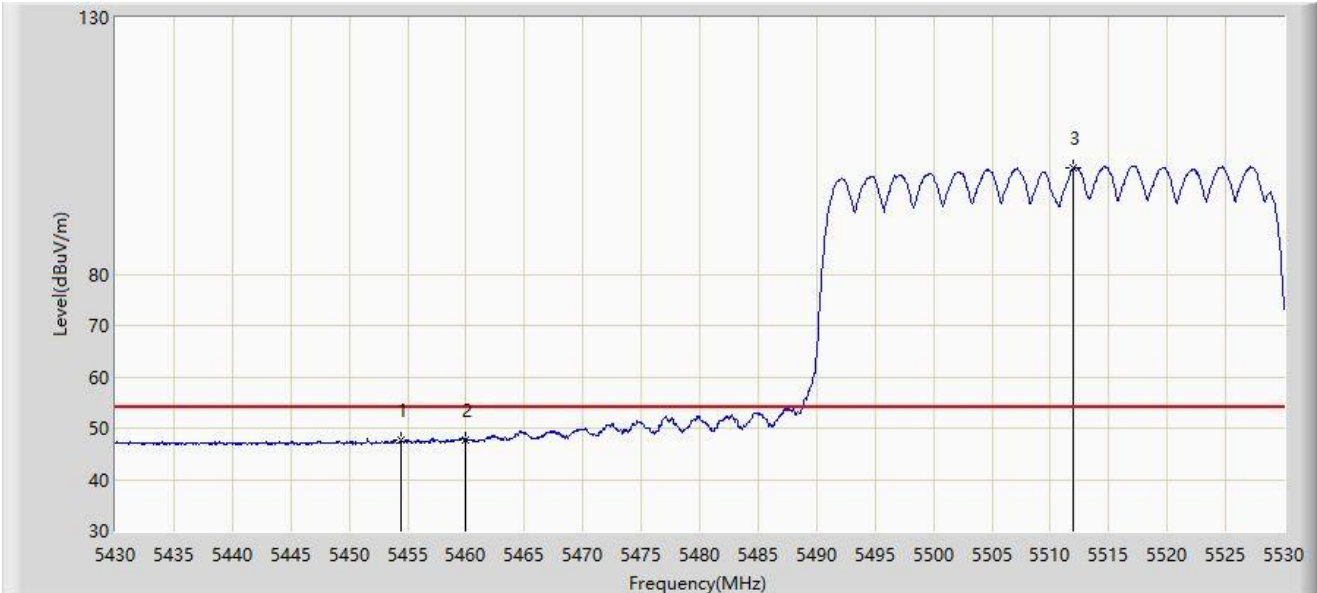


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5454.400	47.595	44.544	-6.405	54.000	3.051	AV
2	*	5460.000	47.659	44.510	-6.341	54.000	3.149	AV
3		5512.000	100.799	97.714	N/A	N/A	3.084	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

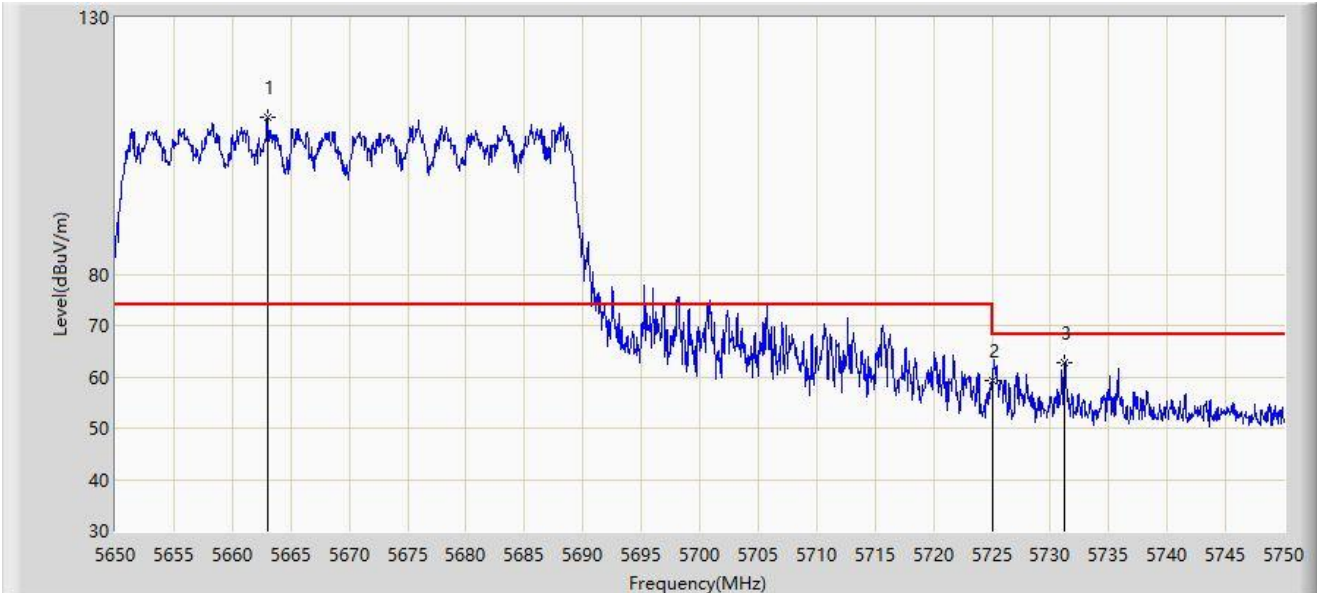


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5663.000	110.696	106.653	N/A	N/A	4.043	PK
2		5725.000	59.137	54.434	-9.063	68.200	4.703	PK
3	*	5731.200	62.812	58.189	-5.388	68.200	4.622	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

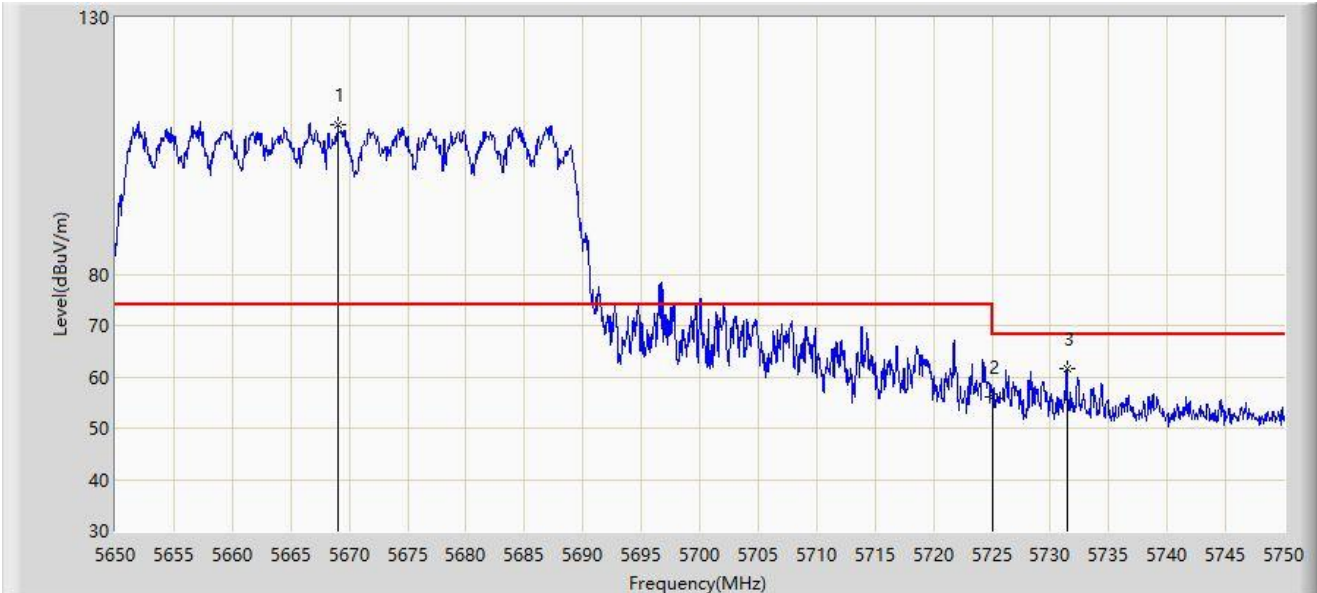


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5669.050	109.047	105.021	N/A	N/A	4.025	PK
2		5725.000	56.057	51.354	-12.143	68.200	4.703	PK
3	*	5731.400	61.561	56.942	-6.639	68.200	4.620	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

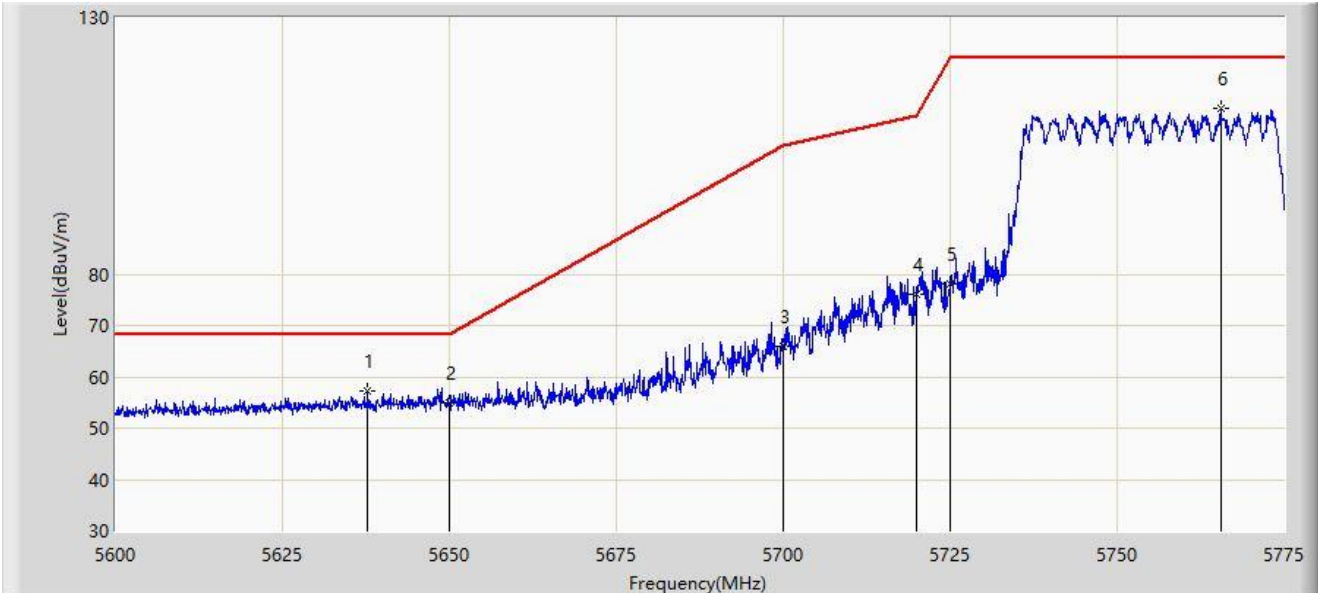


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5637.712	57.284	53.161	-10.916	68.200	4.124	PK
2		5650.000	54.792	50.669	-13.408	68.200	4.122	PK
3		5700.000	65.912	61.475	-39.288	105.200	4.437	PK
4		5720.000	75.960	71.296	-34.840	110.800	4.663	PK
5		5725.000	78.024	73.321	-44.176	122.200	4.703	PK
6		5765.462	112.300	107.595	N/A	N/A	4.706	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

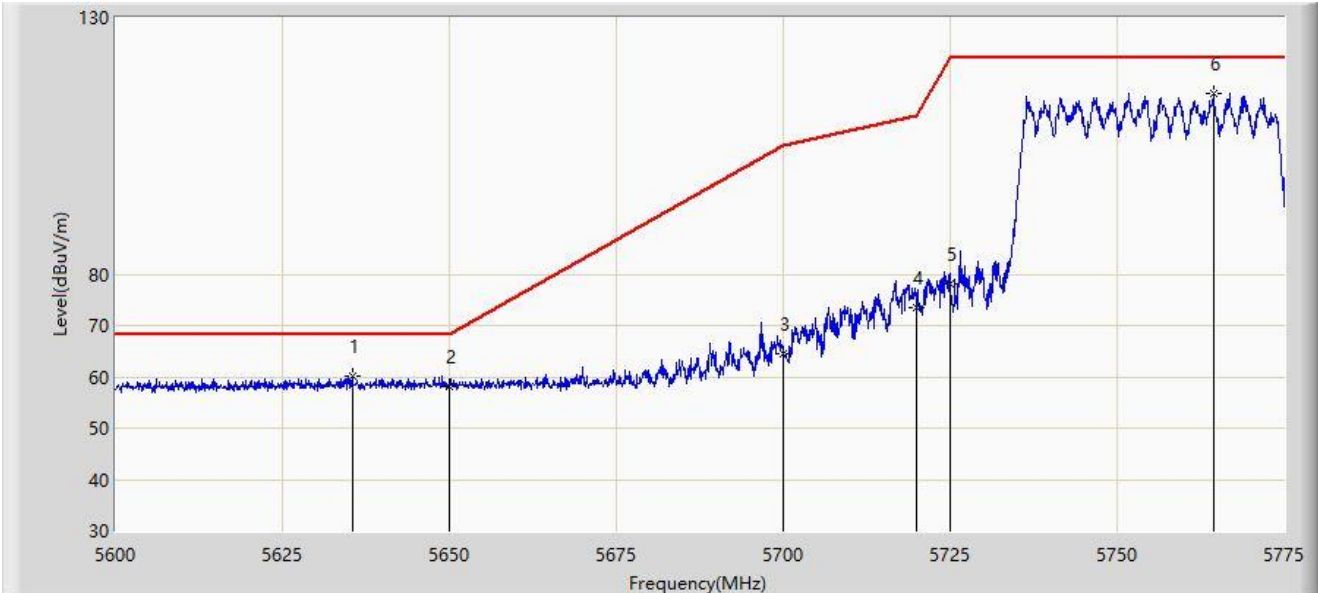


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5635.437	60.252	56.157	-7.948	68.200	4.094	PK
2		5650.000	58.211	54.088	-9.989	68.200	4.122	PK
3		5700.000	64.567	60.130	-40.633	105.200	4.437	PK
4		5720.000	73.469	68.805	-37.331	110.800	4.663	PK
5		5725.000	78.252	73.549	-43.948	122.200	4.703	PK
6		5764.413	115.283	110.594	N/A	N/A	4.690	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

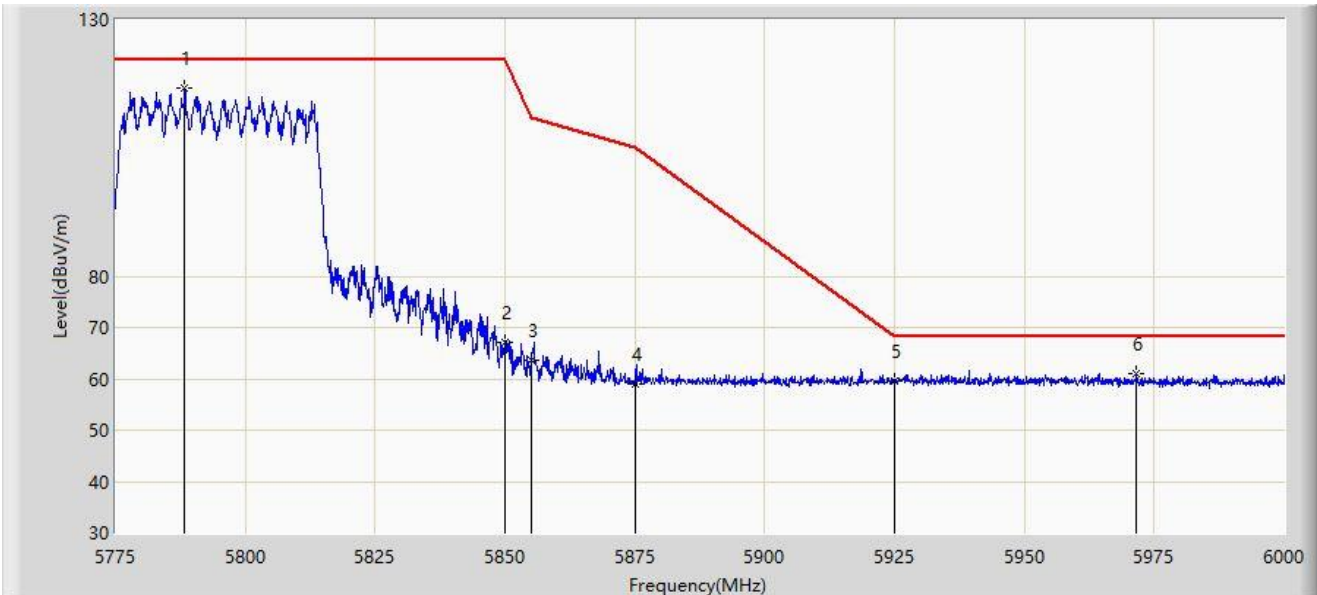


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5788.388	116.730	111.721	N/A	N/A	5.009	PK
2		5850.000	67.232	62.249	-54.968	122.200	4.984	PK
3		5855.000	63.686	58.648	-47.114	110.800	5.038	PK
4		5875.000	59.008	53.877	-46.192	105.200	5.131	PK
5		5925.000	59.596	54.361	-8.604	68.200	5.236	PK
6	*	5971.650	60.944	55.651	-7.256	68.200	5.293	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5.8G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

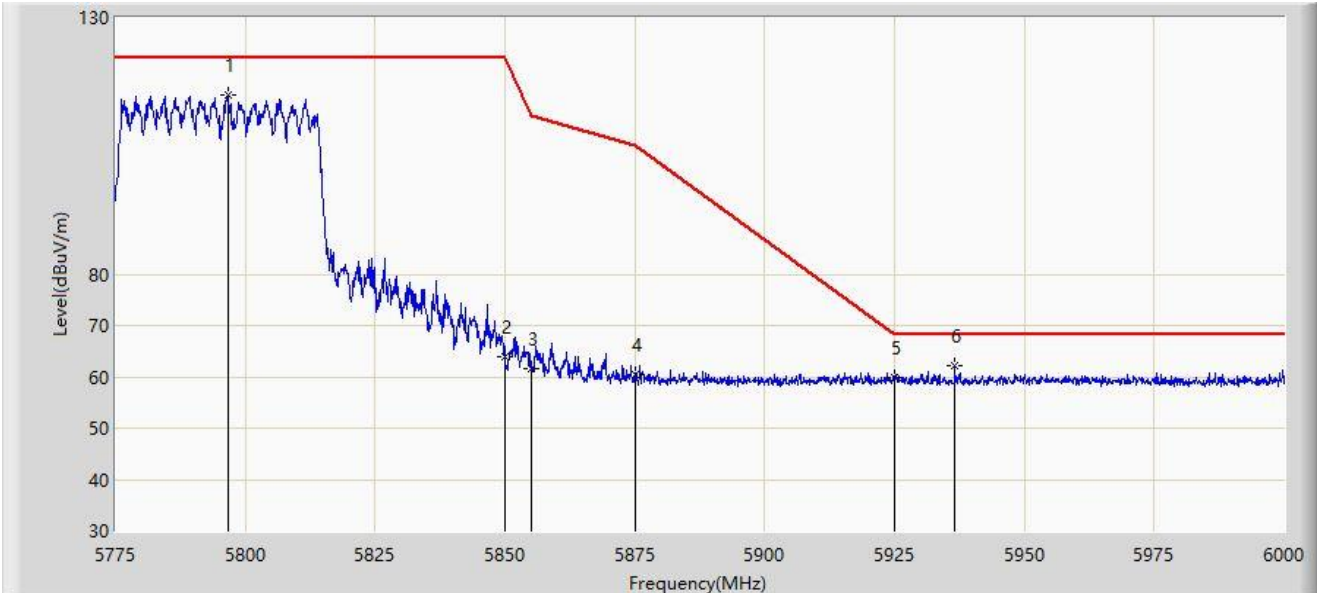


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5796.712	114.819	109.745	N/A	N/A	5.074	PK
2		5850.000	63.920	58.937	-58.280	122.200	4.984	PK
3		5855.000	61.523	56.485	-49.277	110.800	5.038	PK
4		5875.000	60.482	55.351	-44.718	105.200	5.131	PK
5		5925.000	59.870	54.635	-8.330	68.200	5.236	PK
6	*	5936.663	62.029	56.748	-6.171	68.200	5.281	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

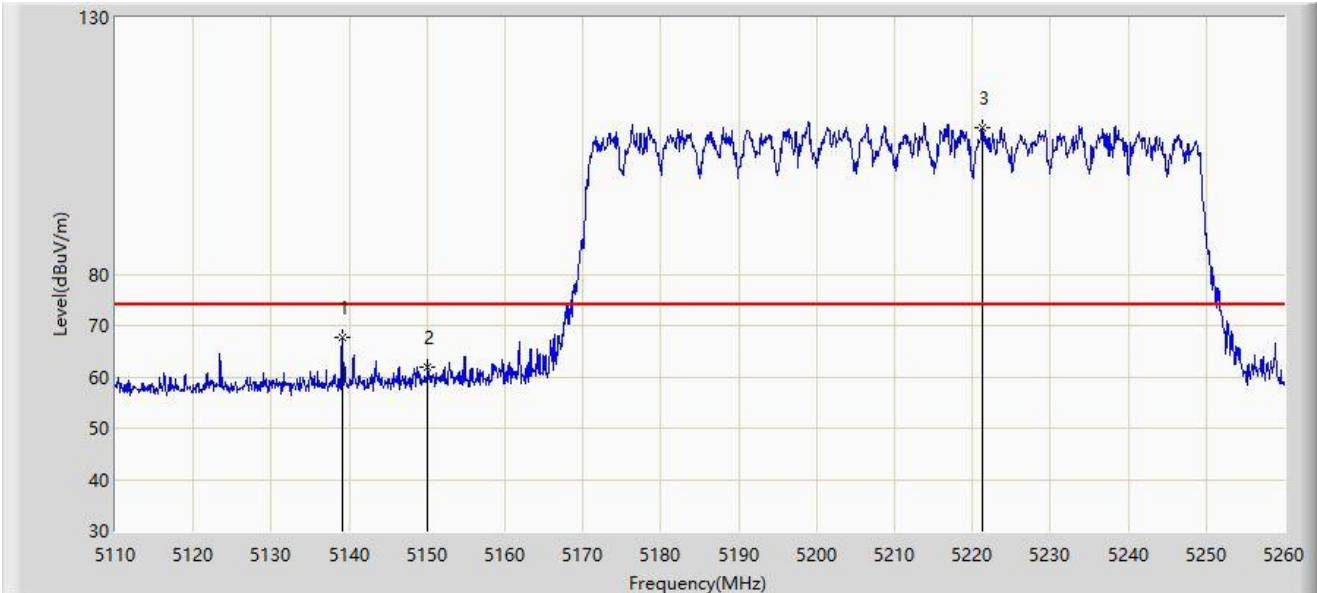


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5139.100	67.539	64.176	-6.461	74.000	3.363	PK
2		5150.000	61.817	58.335	-12.183	74.000	3.482	PK
3		5221.225	108.423	105.420	N/A	N/A	3.004	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

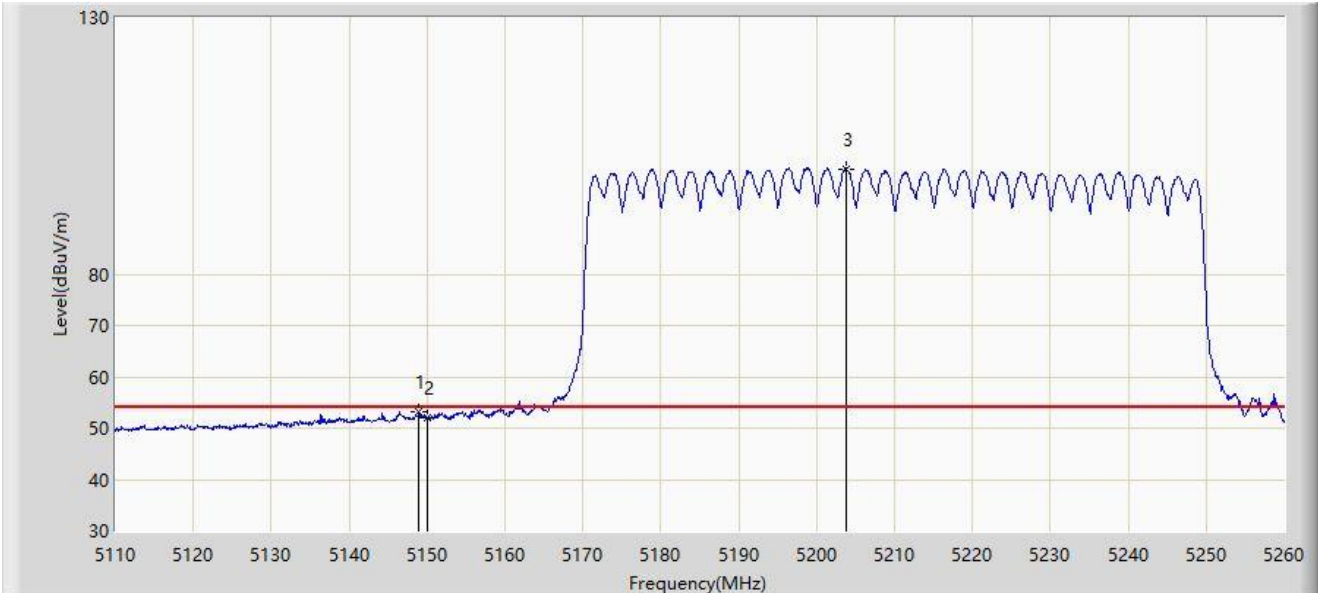


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.925	53.314	49.836	-0.686	54.000	3.478	AV
2		5150.000	52.140	48.658	-1.860	54.000	3.482	AV
3		5203.750	100.562	97.689	N/A	N/A	2.873	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

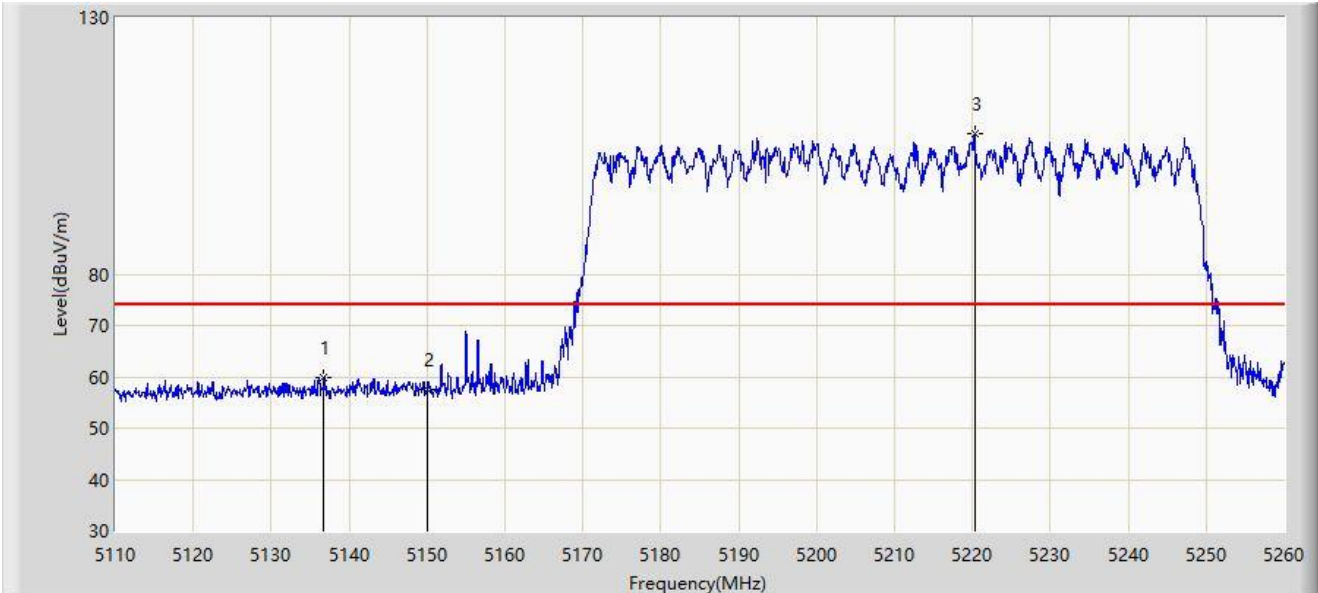


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5136.775	59.813	56.479	-14.187	74.000	3.334	PK
2		5150.000	57.659	54.177	-16.341	74.000	3.482	PK
3		5220.250	107.522	104.534	N/A	N/A	2.987	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

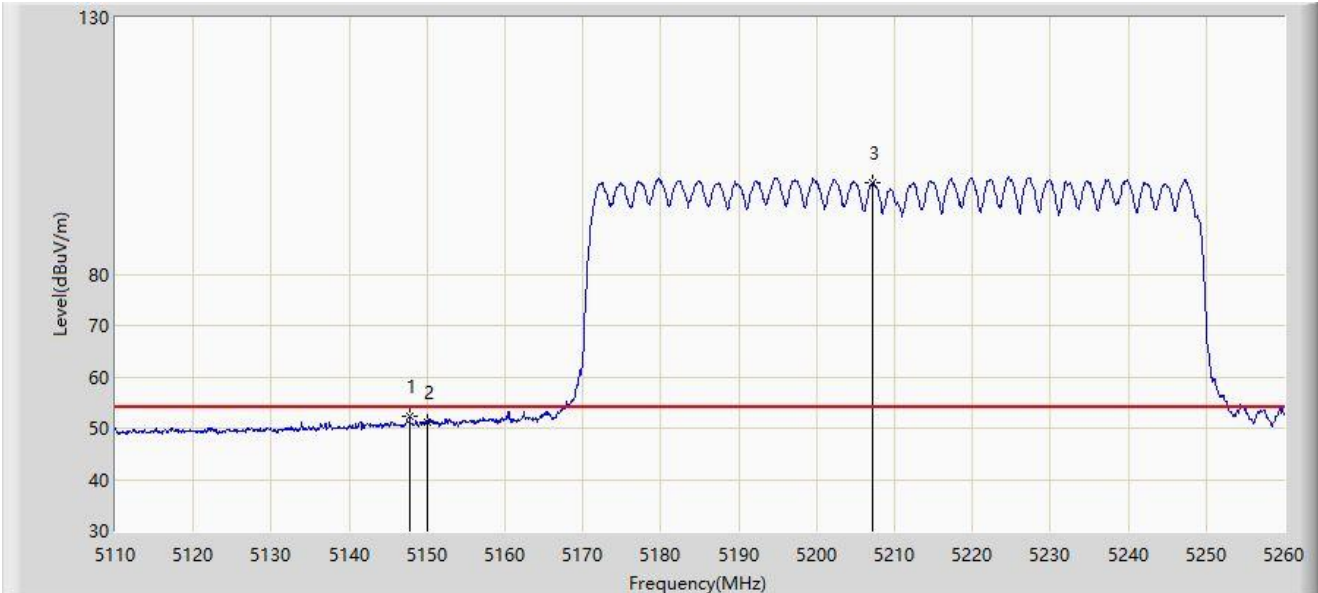


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.800	52.281	48.808	-1.719	54.000	3.473	AV
2		5150.000	51.114	47.632	-2.886	54.000	3.482	AV
3		5207.200	97.937	95.051	N/A	N/A	2.887	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

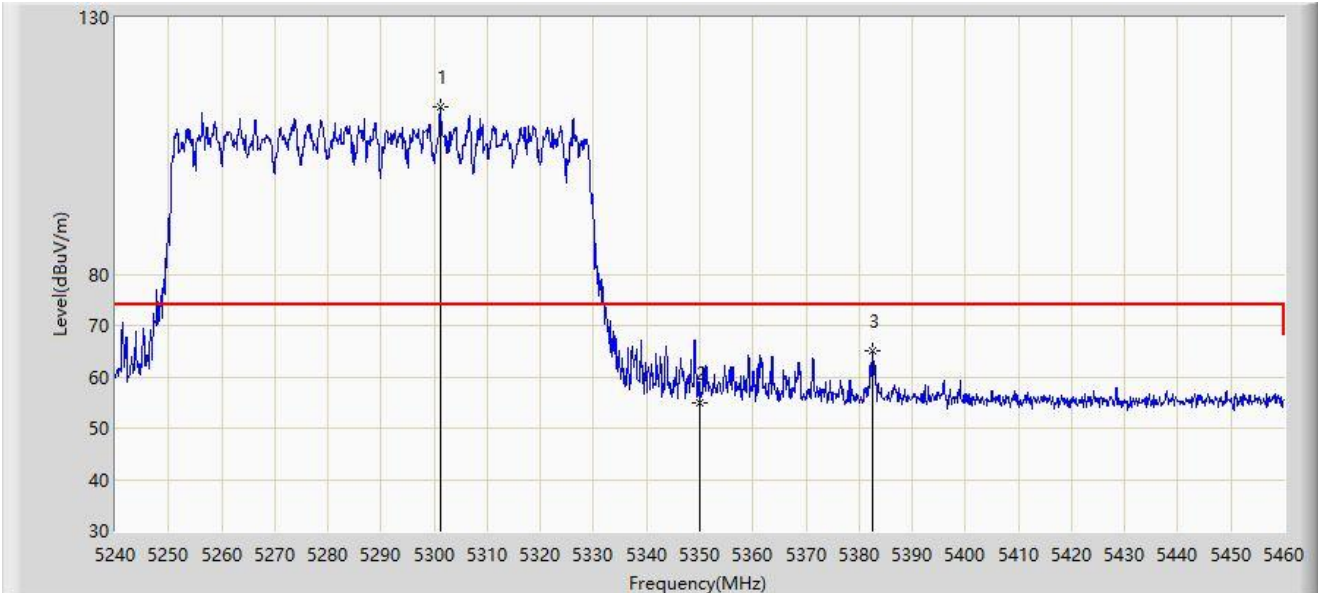


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5301.160	112.465	109.726	N/A	N/A	2.738	PK
2		5350.000	54.997	52.177	-19.003	74.000	2.820	PK
3	*	5382.560	65.143	62.018	-8.857	74.000	3.125	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

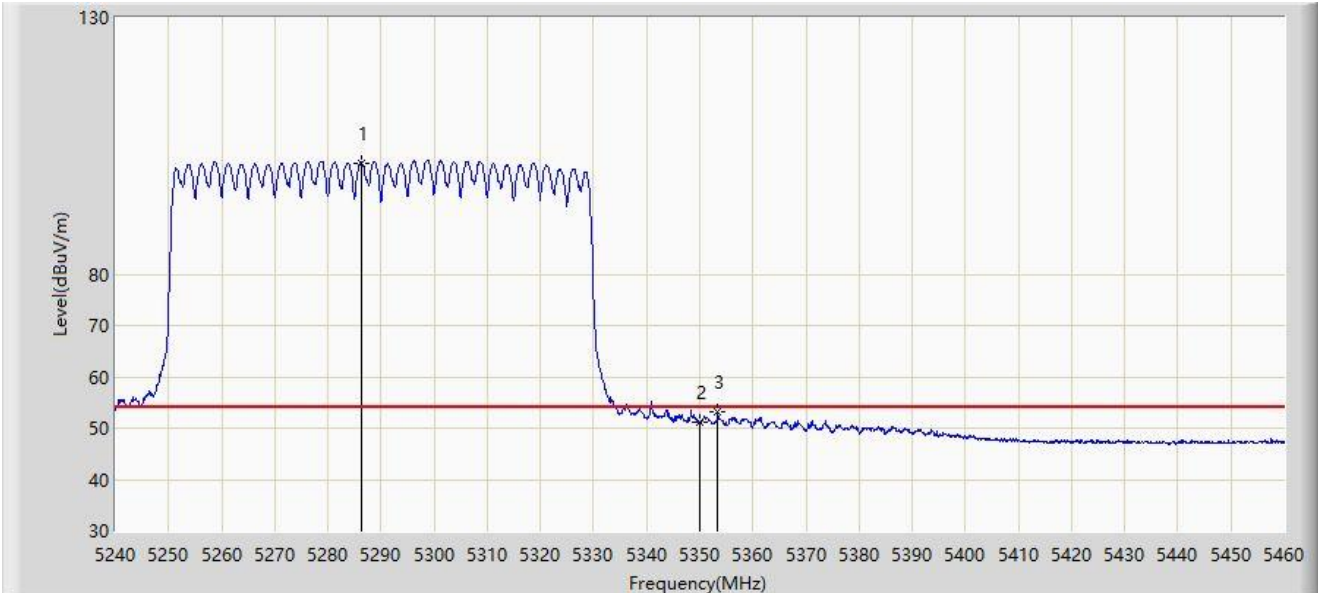


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5286.420	101.648	99.097	N/A	N/A	2.550	AV
2		5350.000	51.183	48.363	-2.817	54.000	2.820	AV
3	*	5353.410	53.128	50.336	-0.872	54.000	2.793	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2024-01-21
Limit: FCC_5G_RE(3m)	Engineer: Karl Gao
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

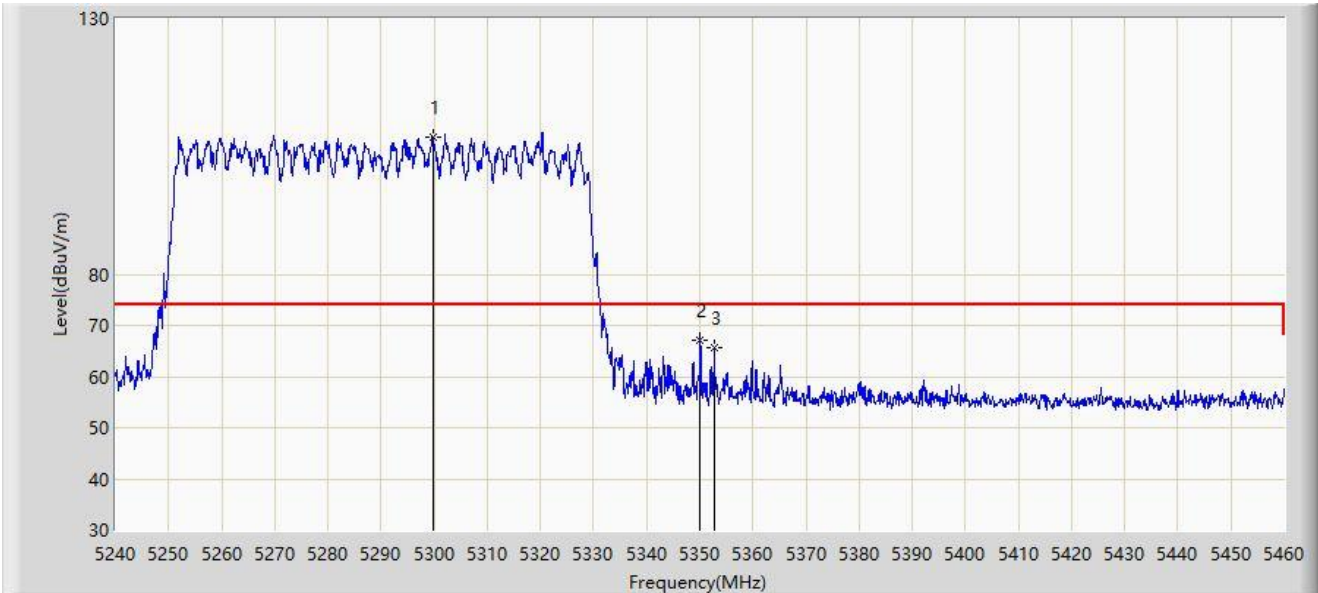

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5299.730	106.890	104.167	N/A	N/A	2.722	PK
2	*	5350.000	67.140	64.320	-6.860	74.000	2.820	PK
3		5352.750	65.529	62.739	-8.471	74.000	2.789	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).