



RF MEASUREMENT REPORT

FCC ID: Q9DAPIN0735
Applicant: Hewlett Packard Enterprise Company
Product: ACCESS POINT
Model No.: APIN0735
Trademark:  , 
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (Section 15.247)
Result: Complies
Received Date: 2023-11-09
Test Date: 2024-01-15 ~ 2023-03-16

Reviewed By:

Jame Yuan

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2311RSU031-U2	V01	Initial Report	2024-04-16	Valid

CONTENTS

Description	Page
1. General Information	6
1.1. Applicant	6
1.2. Manufacturer	6
1.3. Testing Facility	6
1.4. Product Information.....	7
1.5. Radio Specification under Test	7
1.6. Working Frequencies	7
1.7. Description of Operating Paths	8
1.8. Description of Antenna RF Port	8
1.9. Antenna Details.....	9
2. Test Configuration	10
2.1. Test Mode.....	10
2.2. Test System Connection Diagram.....	10
2.3. Test Software	11
2.4. Applied Standards.....	11
2.5. Test Environment Condition	11
3. Antenna Requirements	12
4. Measuring Instrument	13
5. Decision Rules and Measurement Uncertainty	14
5.1. Decision Rules	14
5.2. Measurement Uncertainty	14
6. Test Result.....	15
6.1. Summary.....	15
6.2. 6dB Bandwidth Measurement.....	16
6.2.1. Test Limit	16
6.2.2. Test Procedure	16
6.2.3. Test Setting	16
6.2.4. Test Setup	16
6.2.5. Test Result	16
6.3. Output Power Measurement	17
6.3.1. Test Limit	17
6.3.2. Test Procedure	17
6.3.3. Test Setting	17
6.3.4. Test Setup	17
6.3.5. Test Result	17

6.4.	Power Spectral Density Measurement	18
6.4.1.	Test Limit	18
6.4.2.	Test Procedure	18
6.4.3.	Test Setting	18
6.4.4.	Test Setup	18
6.4.5.	Test Result	18
6.5.	Conducted Band Edge and Out-of-Band Emissions Measurement	19
6.5.1.	Test Limit	19
6.5.2.	Test Procedure	19
6.5.3.	Test Settintg	19
6.5.4.	Test Setup	19
6.5.5.	Test Result	20
6.6.	Radiated Spurious Emission Measurement.....	21
6.6.1.	Test Limit	21
6.6.2.	Test Procedure	21
6.6.3.	Test Setting	21
6.6.4.	Test Setup	23
6.6.5.	Test Result	24
6.7.	Radiated Restricted Band Edge Measurement	25
6.7.1.	Test Limit	25
6.7.2.	Test Procedure	26
6.7.3.	Test Setting	26
6.7.4.	Test Setup	27
6.7.5.	Test Result	27
6.8.	AC Conducted Emissions Measurement	28
6.8.1.	Test Limit	28
6.8.2.	Test Setup	28
6.8.3.	Test Result	28
Appendix A – Test Result		29
A.1	Duty Cycle Test Result	29
A.2	6dB Bandwidth Test Result	32
A.3	Output Power Test Result	35
A.4	Power Spectral Density Test Result	41
A.5	Conducted Band Edge and Out-of-Band Emissions Test Result	44
A.6	Radiated Spurious Emission Test Result	56
A.7	Radiated Restricted Band Edge Test Result	70
A.8	AC Conducted Emissions Test Result	118
Appendix B – Test Setup Photograph		120

Appendix C – EUT Photograph121

1. General Information

1.1. Applicant

Hewlett Packard Enterprise Company

6280 America Center Drive, San Jose CA 95002, United States

1.2. Manufacturer

Hewlett Packard Enterprise Company

6280 America Center Drive, San Jose CA 95002, United States

1.3. Testing Facility

<input checked="checked" type="checkbox"/>	Test Site – MRT Suzhou Laboratory
	Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	Laboratory Accreditations
	A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: <input type="checkbox"/> R-20025 <input type="checkbox"/> G-20034 <input type="checkbox"/> C-20020 <input type="checkbox"/> T-20020 <input type="checkbox"/> R-20141 <input type="checkbox"/> G-20134 <input type="checkbox"/> C-20103 <input type="checkbox"/> T-20104
<input type="checkbox"/>	Test Site – MRT Shenzhen Laboratory
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
<input type="checkbox"/>	Test Site – MRT Taiwan Laboratory
	Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: 3261 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	ACCESS POINT
Model No.	APIN0735
Serial No.	CNRJM5200D
Software Version	BCM4711A0_11_02_2023
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be
Bluetooth Specification	BLE only
ZigBee Specification	802.15.4
GNSS Specification	GPS, Galileo
Antenna Information	Refer to Section 1.9
Power Type	AC Adapter Input or PoE Input
Operating Environment	Indoor Use
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification under Test

ZigBee Specification	802.15.4
Frequency Range	2405 ~ 2480MHz
Channel Number	16
Type of Modulation	O-QPSK

1.6. Working Frequencies


Channel	Frequency	Channel	Frequency	Channel	Frequency
11	2405 MHz	12	2410 MHz	13	2415 MHz
14	2420 MHz	15	2425 MHz	16	2430 MHz
17	2435 MHz	18	2440 MHz	19	2445 MHz
20	2450 MHz	21	2455 MHz	22	2460 MHz
23	2465 MHz	24	2470 MHz	25	2475 MHz
26	2480 MHz	--	--	--	--

1.7. Description of Operating Paths

The EUT has two BLE/ZigBee radios, Core 0 and Core1, Core 0 was equipped with one antenna named Ant 6 and Core 1 was equipped with two antennas named Ant 8 and Ant 3, The front end of each antenna port corresponds to three filters respectively, filter 1#, 2#, 3# for Ant 6, filter 4#, 5#, 6# for Ant 8, filter 7#, 8#, 9# for Ant 3, details are as follows.

Filter	Specification	Remark
1#, 4#, 7#	Band Pass Filter (2402-2480)	Allowing any transmission on all channels
2#, 5#, 8#	Band Pass Filter (2402-2430)	Allowing transmission on BLE channels 37 (2402MHz) and 38 (2426MHz) and Zigbee channel 11 (2405MHz)
3#, 6#, 9#	Band Pass Filter (2478-2482)	Allowing transmission on BLE channel 39 (2480MHz) and Zigbee channel 26(2480MHz)

1.8. Description of Antenna RF Port

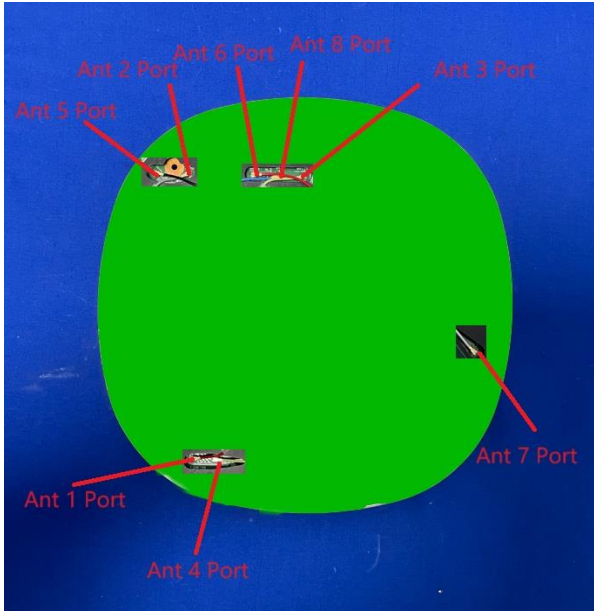

Antenna Port	RF Spec.			
	Wi-Fi 2.4G	Wi-Fi 5G	Wi-Fi 6G	BLE/ZigBee
Ant 1	--	--	● (Radio 2)	--
Ant 4	--	--	● (Radio 2)	--
Ant 2	● (Radio 0)	● (Radio 1)	--	--
Ant 5	● (Radio 0)	● (Radio 1)	--	--
Ant 3	--	--	--	● (Core 1)
Ant 6	--	--	--	● (Core 0)
Ant 8	--	--	--	● (Core 1)
Ant 7	GNSS			

1.9. Antenna Details

Antenna Type	Frequency Band (GHz)	Antenna Gain (dBi)		
		Ant 6	Ant 8	Ant 3
PIFA	2.4 ~ 2.5	3.60	4.51	4.74


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit at Core 0 on Ant 6 port
Mode 2: Transmit at Core 1 on Ant 8 port
Mode 3: Transmit at Core 1 on Ant 3 port

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

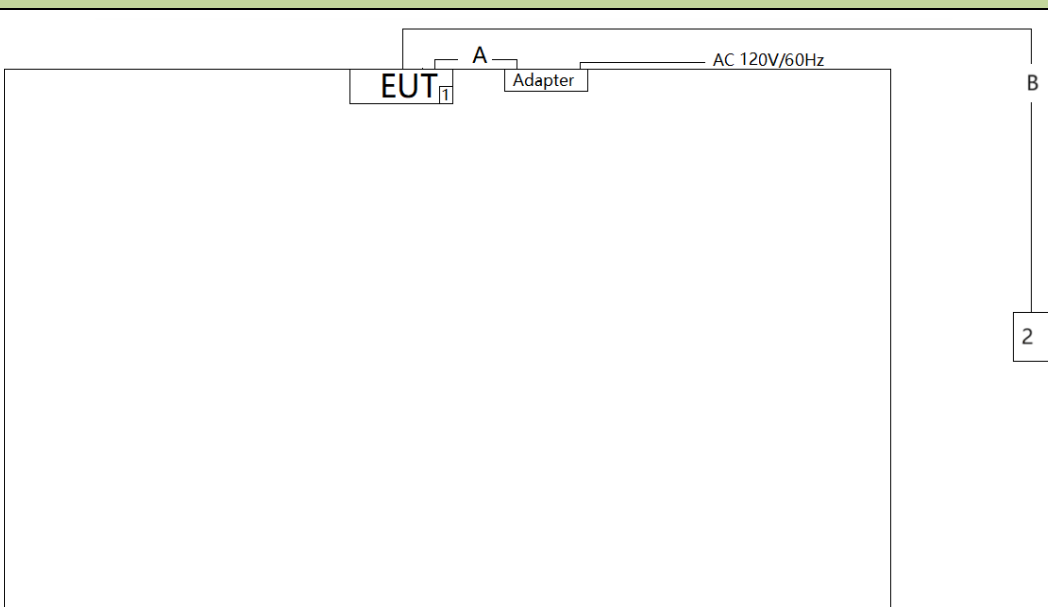Connection Diagram			
			
No.	Cable Type	Cable Spec.	Length
A	Power Cable	Non-Shielded	1.2m
B	LAN Cable	Non-Shielded, Cat 6	>10.0m
No.	Product	Manufacturer	Model No.
1	USB Flash	SanDisk	16G
2	Notebook	DELL	Latitude 5491

2.3. Test Software

The test utility software used during testing was “telnet”, and commands were provided by the manufacturer.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01v05r02
- ANSI C63.10-2013

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2024-12-17	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2024-08-09	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2024-10-11	WZ-AC1
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2024-05-07	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2024-06-09	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2024-04-20	WZ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2024-10-23	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11039	1 year	2024-10-25	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2024-05-15	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2024-05-23	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2024-10-11	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2024-05-07	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2024-04-20	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11263	1 year	2024-11-07	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2024-11-04	WZ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2025-01-11	WZ-AC2
Active Loop Antenna	Schwarzbeck	FMZB 1519-60 D	MRTSUE07076	1 year	2024-12-04	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2024-05-31	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2024-05-23	WZ-SR5
USB Power Sensor	Keysight	U2021XA	MRTSUE06446	1 year	2024-05-23	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11092	1 year	2024-06-08	WZ-SR5
Shielding Room	MIX-BEP	WZ-SR2	MRTSUE06215	5 years	2026-12-20	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2024-05-31	WZ-SR2
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2024-05-23	WZ-SR2
Four-Line V-Network	R&S	ENV432	MRTSUE06615	1 year	2024-09-27	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2024-09-27	WZ-SR2

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Controller_MF 7802	2.03C	RE Antenna & Turntable
Controller_MF 7802	1.02	RE Antenna & Turntable
BenchVue Power Meter	2018.1	Power

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.61dB Coplanar: 9kHz~30MHz: 2.62dB Horizontal: 30MHz~200MHz: 3.79dB 200MHz~1GHz: 3.91dB 1GHz~40GHz: 4.99dB Vertical: 30MHz~200MHz: 4.06dB 200MHz~1GHz: 5.21dB 1GHz~40GHz: 4.90dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.2dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.4dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.2dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.7%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(a)(2)	6dB Bandwidth	Conducted	Pass
15.247(b)(3)	Output Power		Pass
15.247(e)	Power Spectral Density		Pass
15.247(d)	Band Edge / Out-of-Band Emissions		Pass
15.205 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Notes:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- For radiated emission tests, every axis (X, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
- The test items of each filter see table below:

Test Items	Filter 1# & 4# & 7#	Filter 2 # & 5# & 8#	Filter 3# & 6# & 9#
6dB Bandwidth	•	--	--
Output Power	•	•	•
Power Spectral Density	•	--	--
Band Edge / Out-of-Band Emissions	•	•	•
Radiated Spurious Emission	•	•	•
Radiated Band Edge	•	•	•
AC Conducted Emissions 150kHz - 30MHz	•	--	--

6.2. 6dB Bandwidth Measurement

6.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.2.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.8

6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize

6.2.4. Test Setup

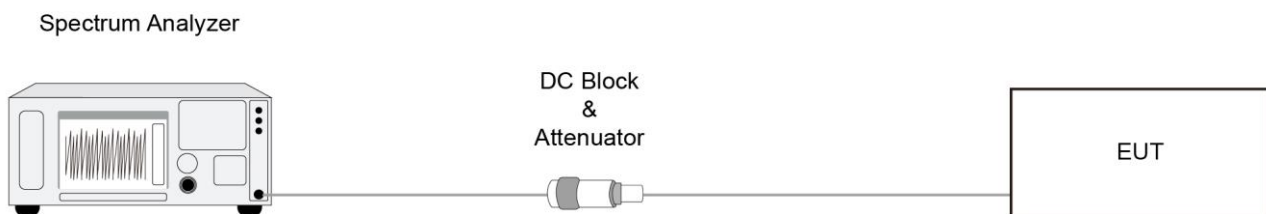

6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.9.2.3.2

6.3.3. Test Setting


Method PKPM1 (Peak Power Measurement of Signals with DTS BW \leq 50MHz)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup

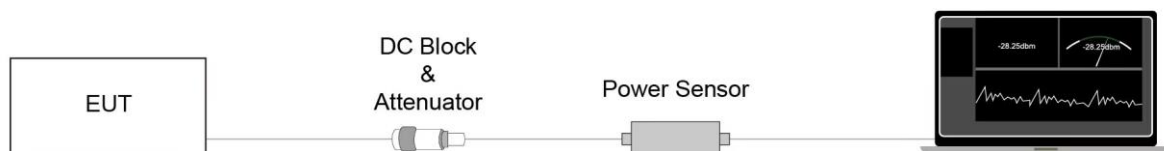

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


6.4.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.10.2

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.4.4. Test Setup

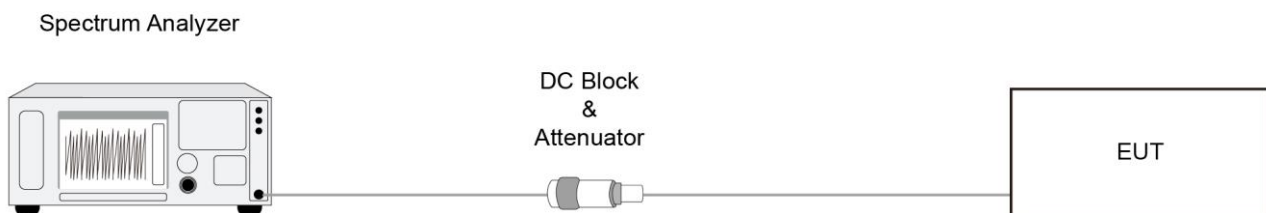

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Conducted Band Edge and Out-of-Band Emissions Measurement

6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

6.5.2. Test Procedure

ANSI C63.10-2013 - Section 11.11

6.5.3. Test Setting


Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.5.4. Test Setup

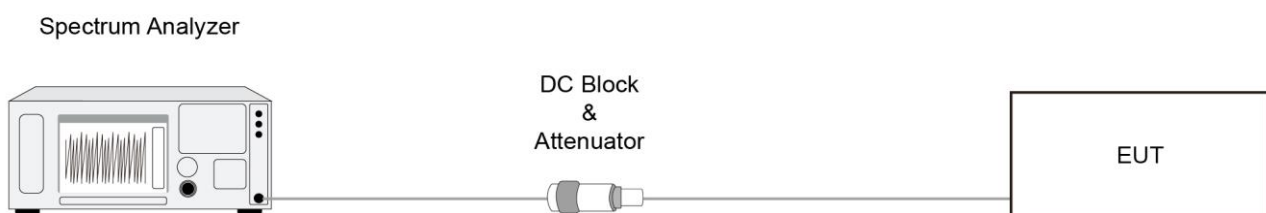

6.5.5. Test Result

Refer to Appendix A.5.

6.6. Radiated Spurious Emission Measurement

6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.6.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

6.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.

ZigBee	VBW =240Hz	--	--
--------	------------	----	----


4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.6.4. Test Setup


Below 30MHz Test Setup:

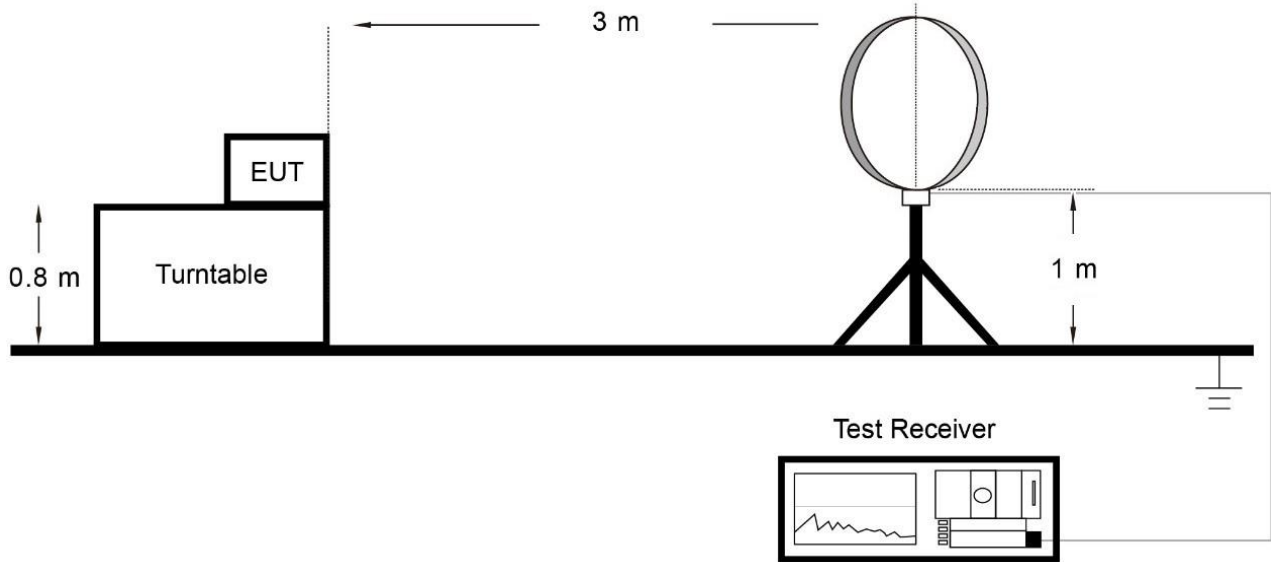

Below 1GHz Test Setup:

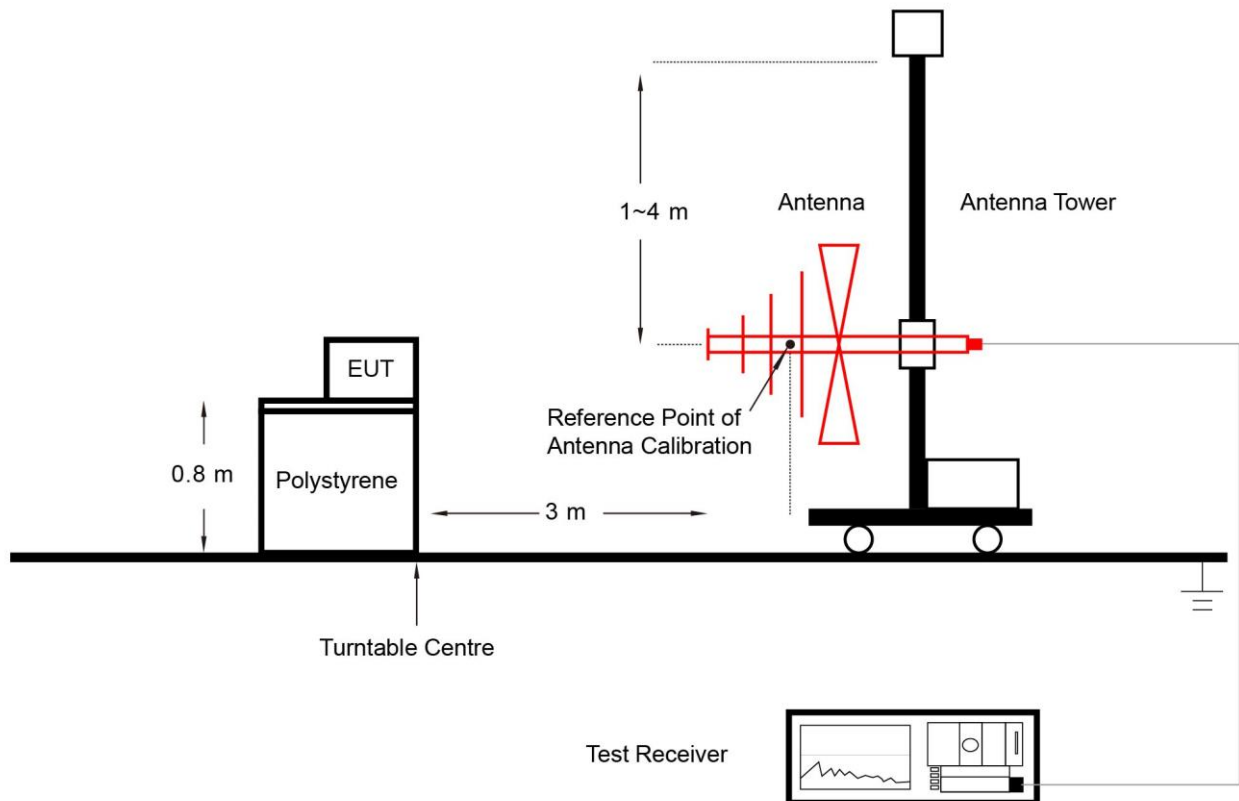

Above 1GHz Test Setup:

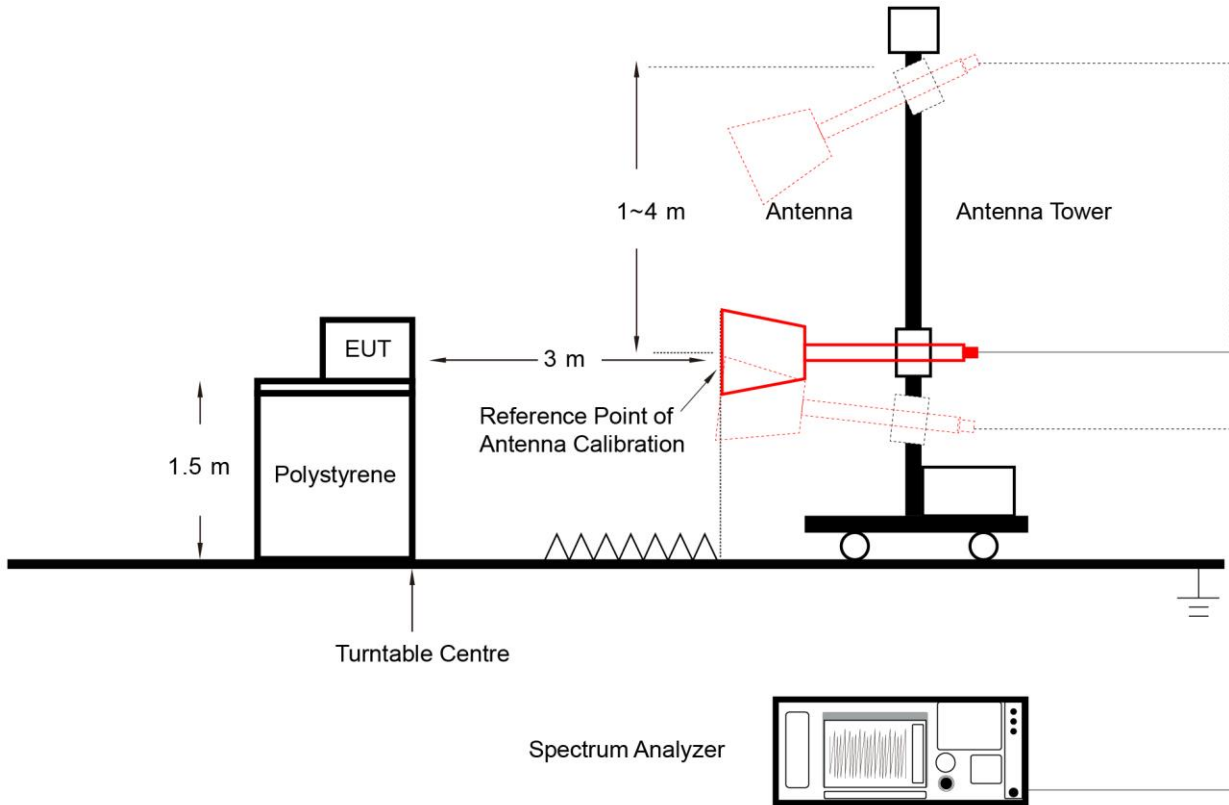

6.6.5. Test Result

Refer to Appendix A.6.

6.7. Radiated Restricted Band Edge Measurement

6.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2. Test Procedure

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

6.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.

ZigBee	VBW =240Hz	--	--
--------	------------	----	----

4. Average Type = Voltage
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.7.4. Test Setup

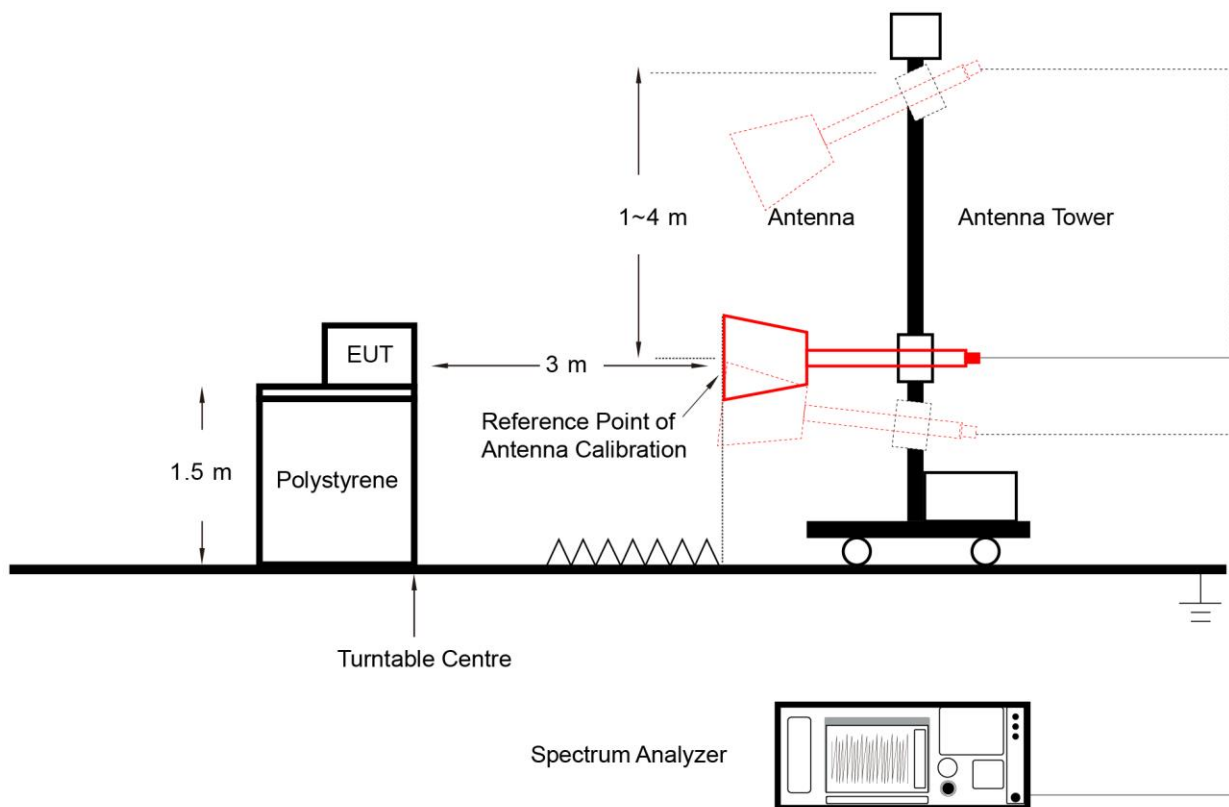

6.7.5. Test Result

Refer to Appendix A.7.

6.8. AC Conducted Emissions Measurement


6.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.8.2. Test Setup

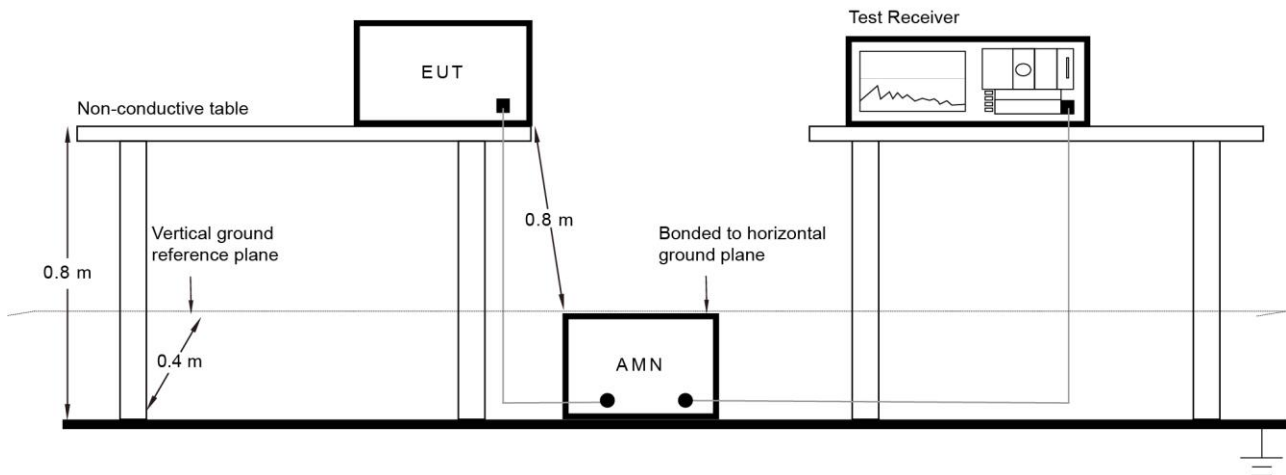

6.8.3. Test Result

Refer to Appendix A.8.

Appendix A – Test Result

A.1 Duty Cycle Test Result

Mode 1

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-17		

Test Mode	Duty Cycle
802.15.4	91.22%

Duty Cycle (T = Transmission Duration)																																									
802.15.4 (T= 4.226ms)																																									
<p>The screenshot shows a Keysight Spectrum Analyzer interface. The main display shows a pulse train waveform. A marker labeled 'AMkr3' indicates a duration of 4.633 ms and a level of 7.81 dB. Another marker indicates a duration of 4.226 ms and a level of 0.0759 dB. The interface includes various settings and a marker table at the bottom.</p> <table border="1"> <thead> <tr> <th>Mode</th> <th>Trace</th> <th>Scale</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>t</td> <td>Δ</td> <td>4.226 ms (Δ)</td> <td>0.0759 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>5.208 ms</td> <td>8.945 dBm</td> <td></td> </tr> <tr> <td>3</td> <td>Δ4</td> <td>1</td> <td>t</td> <td>Δ</td> <td>4.633 ms (Δ)</td> <td>7.813 dB</td> <td></td> </tr> <tr> <td>4</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>5.208 ms</td> <td>2.093 dBm</td> <td></td> </tr> </tbody> </table>	Mode	Trace	Scale	X	Y	Function	Function Width	Function Value	1	Δ2	1	t	Δ	4.226 ms (Δ)	0.0759 dB		2	F	1	t		5.208 ms	8.945 dBm		3	Δ4	1	t	Δ	4.633 ms (Δ)	7.813 dB		4	F	1	t		5.208 ms	2.093 dBm		
Mode	Trace	Scale	X	Y	Function	Function Width	Function Value																																		
1	Δ2	1	t	Δ	4.226 ms (Δ)	0.0759 dB																																			
2	F	1	t		5.208 ms	8.945 dBm																																			
3	Δ4	1	t	Δ	4.633 ms (Δ)	7.813 dB																																			
4	F	1	t		5.208 ms	2.093 dBm																																			

Mode 2

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-17		

Test Mode	Duty Cycle
802.15.4	91.70%

Duty Cycle (T = Transmission Duration)	
802.15.4 (T= 4.240ms)	

Mode	Trace	Scale	X	Y	Function	Function Width	Function Value
1	Δ2	1	t	(Δ)	4.240 ms (Δ)	-0.04669 dB	
2	F	1	t		5.776 ms	8.961 dBm	
3	Δ4	1	t	(Δ)	4.624 ms (Δ)	0.00723 dB	
4	F	1	t		5.776 ms	8.961 dBm	

Mode 3

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-17		

Test Mode	Duty Cycle
802.15.4	91.70%


Duty Cycle (T = Transmission Duration)	
802.15.4 (T= 4.240ms)	

A.2 6dB Bandwidth Test Result

Mode 1

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-17		

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.15.4	O-QPSK	11	2405	1.586	≥ 0.5	Pass
802.15.4	O-QPSK	18	2440	1.619	≥ 0.5	Pass
802.15.4	O-QPSK	26	2480	1.535	≥ 0.5	Pass

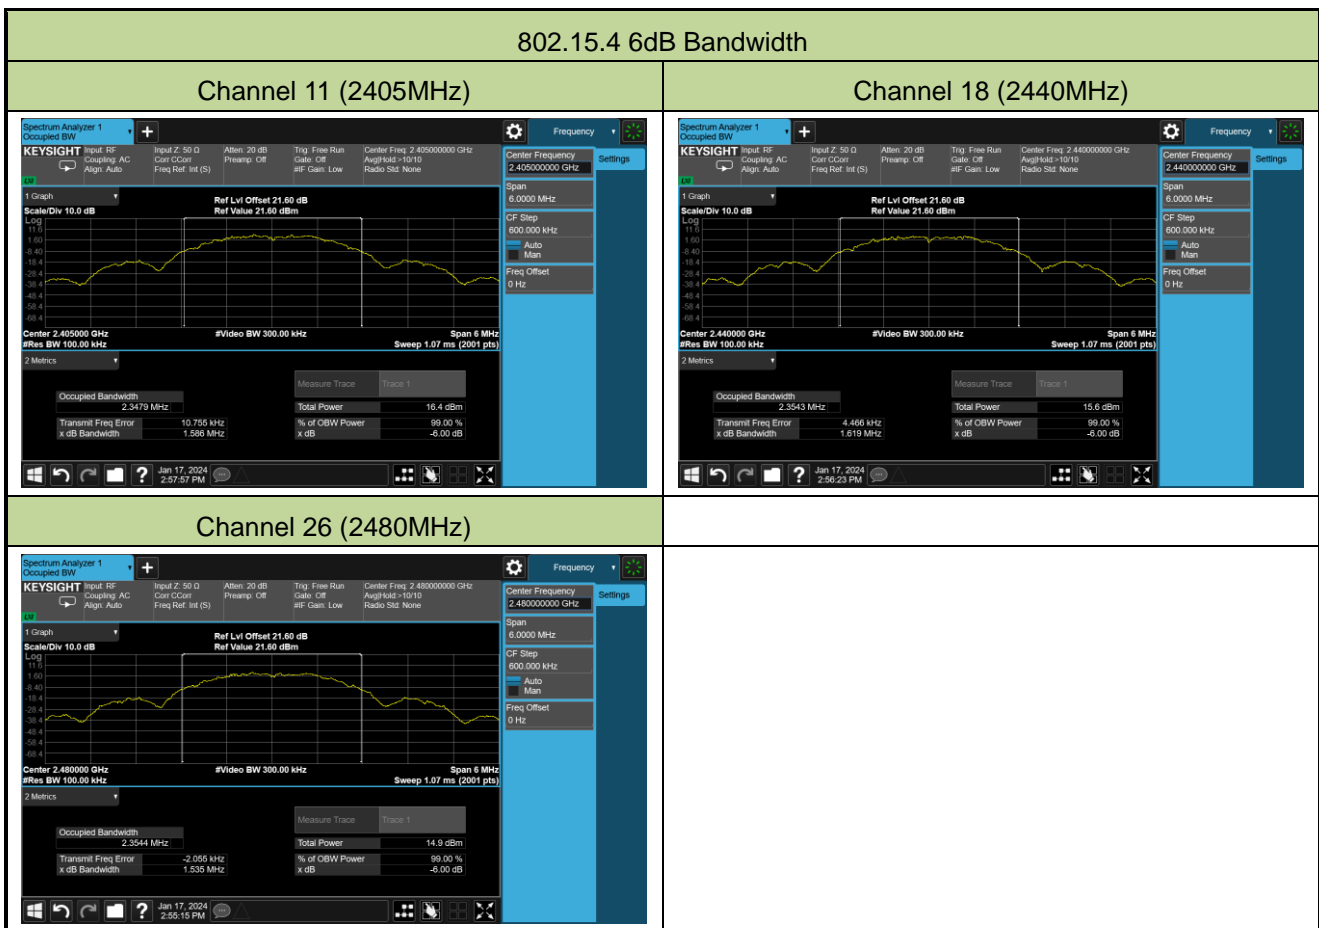

Mode 2

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-17		

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.15.4	O-QPSK	11	2405	1.634	≥ 0.5	Pass
802.15.4	O-QPSK	18	2440	1.596	≥ 0.5	Pass
802.15.4	O-QPSK	26	2480	1.582	≥ 0.5	Pass


802.15.4 6dB Bandwidth

Channel 11 (2405MHz)	Channel 18 (2440MHz)
<p>Channel 11 (2405MHz)</p> <p>Center Frequency: 2.40500000 GHz</p> <p>Occupied Bandwidth: 2.3738 MHz</p> <p>Total Power: 14.6 dBm</p>	<p>Channel 18 (2440MHz)</p> <p>Center Frequency: 2.44000000 GHz</p> <p>Occupied Bandwidth: 2.5566 MHz</p> <p>Total Power: 13.7 dBm</p>
<p>Channel 26 (2480MHz)</p> <p>Center Frequency: 2.48000000 GHz</p> <p>Occupied Bandwidth: 2.3714 MHz</p> <p>Total Power: 13.4 dBm</p>	

Mode 3

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-17		

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.15.4	O-QPSK	11	2405	1.442	≥ 0.5	Pass
802.15.4	O-QPSK	18	2440	1.579	≥ 0.5	Pass
802.15.4	O-QPSK	26	2480	1.577	≥ 0.5	Pass

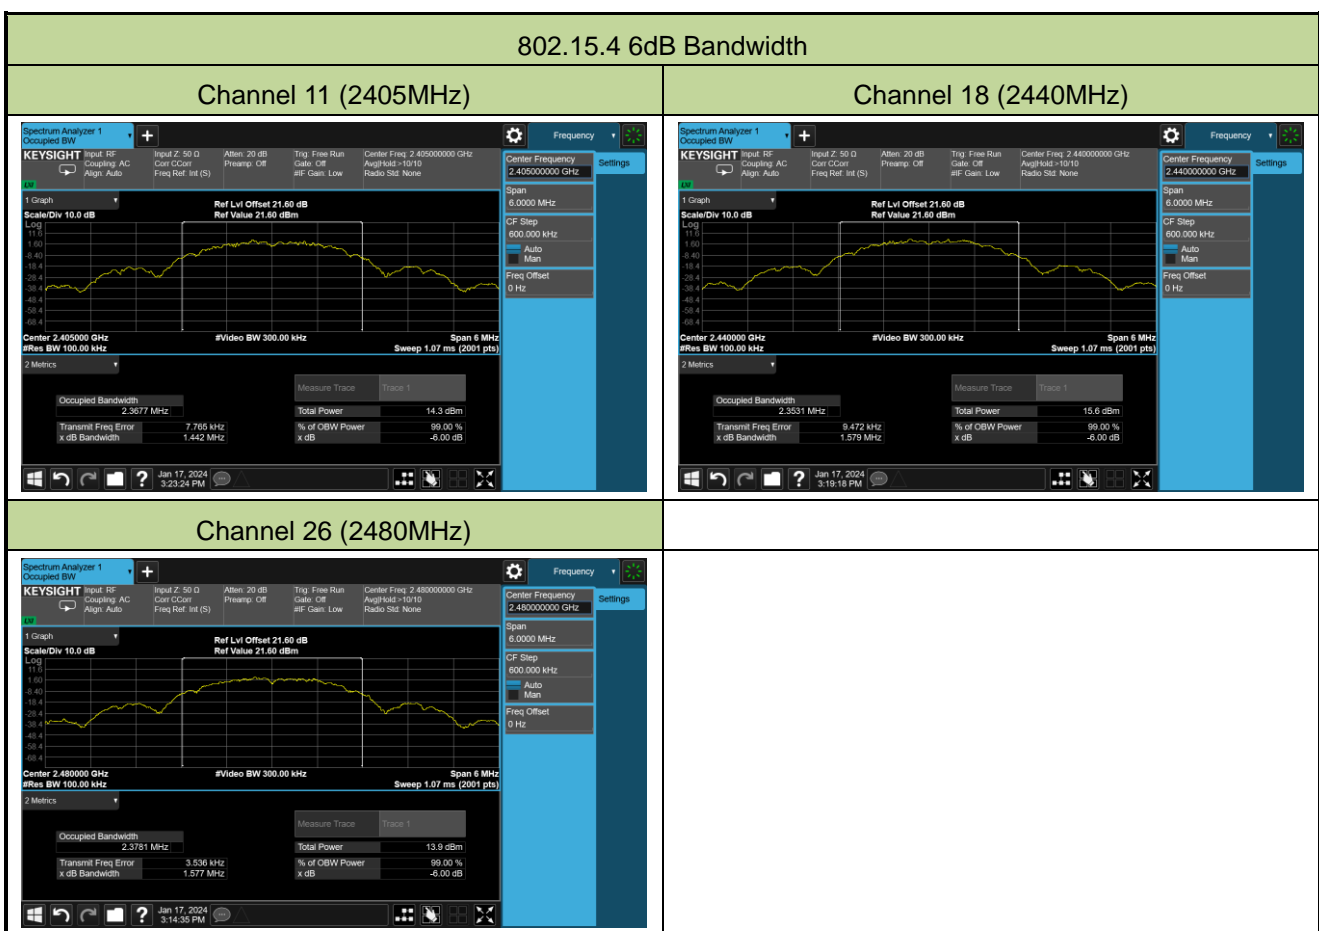

A.3 Output Power Test Result

Mode 1

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-15	Filter	1#

Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	10.93	≤ 30.00	Pass
802.15.4	O-QPSK	18	2440	10.52	≤ 30.00	Pass
802.15.4	O-QPSK	26	2480	9.31	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	9.97	≤ 30.00	Pass
802.15.4	O-QPSK	18	2440	9.63	≤ 30.00	Pass
802.15.4	O-QPSK	26	2480	8.39	≤ 30.00	Pass

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-15	Filter	2#

Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	10.28	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	9.45	≤ 30.00	Pass

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-15	Filter	3#

Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	26	2480	7.84	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	26	2480	7.01	≤ 30.00	Pass

Mode 2

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-15	Filter	4#

Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	9.75	≤ 30.00	Pass
802.15.4	O-QPSK	18	2440	8.93	≤ 30.00	Pass
802.15.4	O-QPSK	26	2480	8.26	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	9.27	≤ 30.00	Pass
802.15.4	O-QPSK	18	2440	8.34	≤ 30.00	Pass
802.15.4	O-QPSK	26	2480	7.62	≤ 30.00	Pass

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-15	Filter	5#

Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	8.57	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	7.99	≤ 30.00	Pass

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-15	Filter	6#

Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	26	2480	7.29	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	26	2480	6.77	≤ 30.00	Pass

Mode 3

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-15	Filter	7#

Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	9.57	≤ 30.00	Pass
802.15.4	O-QPSK	18	2440	9.78	≤ 30.00	Pass
802.15.4	O-QPSK	26	2480	8.92	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	9.01	≤ 30.00	Pass
802.15.4	O-QPSK	18	2440	9.27	≤ 30.00	Pass
802.15.4	O-QPSK	26	2480	8.37	≤ 30.00	Pass

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-15	Filter	8#

Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	9.24	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	11	2405	8.71	≤ 30.00	Pass

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-15	Filter	9#

Test Result of Peak Output Power

Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	26	2480	7.37	≤ 30.00	Pass

Test Result of Average Output Power (Reporting Only)


Test Mode	Modulation Mode	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
802.15.4	O-QPSK	26	2480	6.68	≤ 30.00	Pass

A.4 Power Spectral Density Test Result

Mode 1

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-17		


Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	PK PSD (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
802.15.4	O-QPSK	11	2405	-1.07	≤ 8.00	Pass
802.15.4	O-QPSK	18	2440	-0.82	≤ 8.00	Pass
802.15.4	O-QPSK	26	2480	-1.58	≤ 8.00	Pass

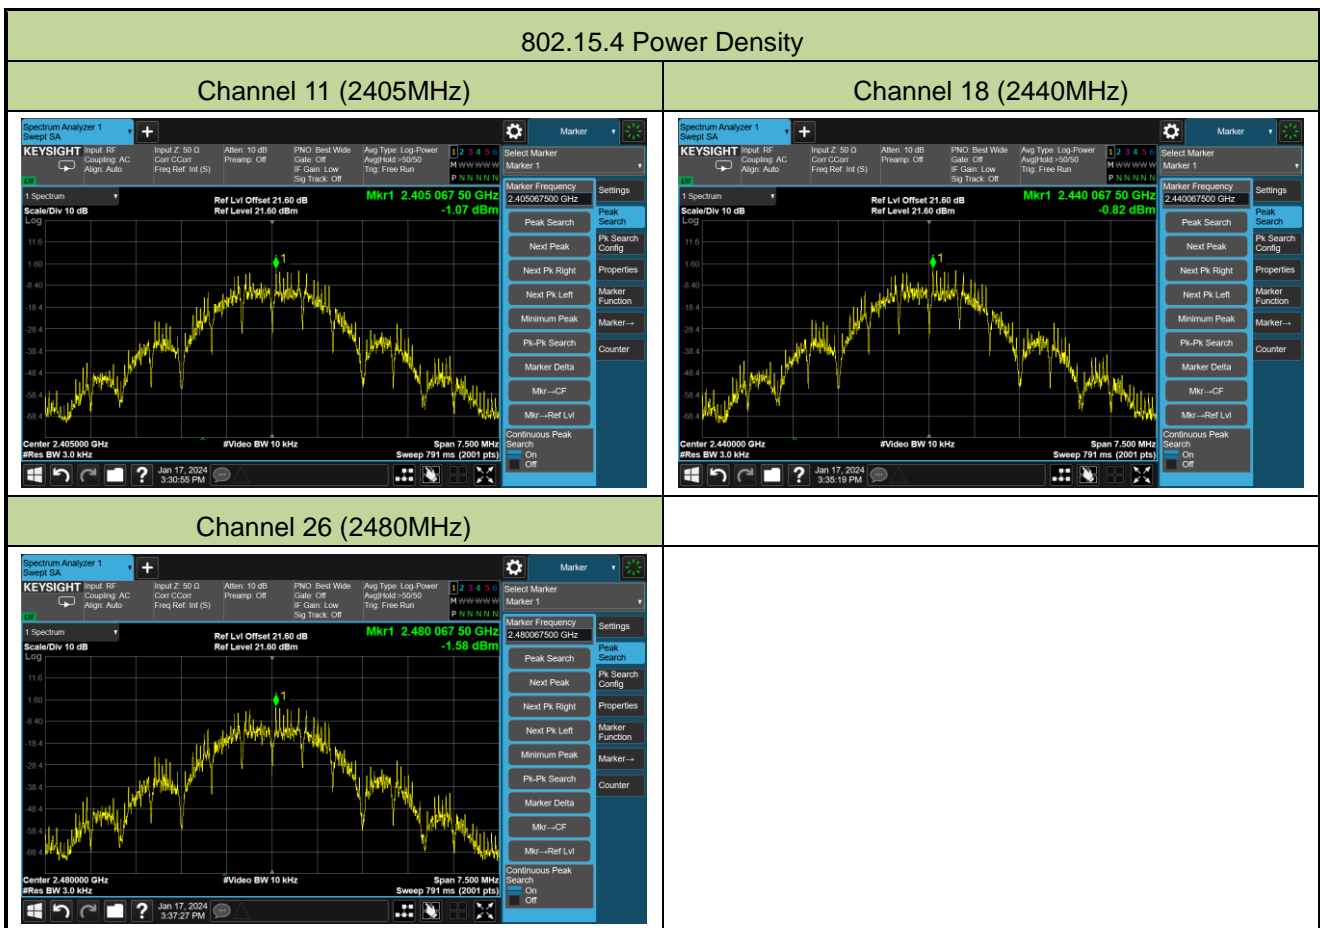

Mode 2

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-17		


Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	PK PSD (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
802.15.4	O-QPSK	11	2405	-1.13	≤ 8.00	Pass
802.15.4	O-QPSK	18	2440	-2.07	≤ 8.00	Pass
802.15.4	O-QPSK	26	2480	-2.73	≤ 8.00	Pass

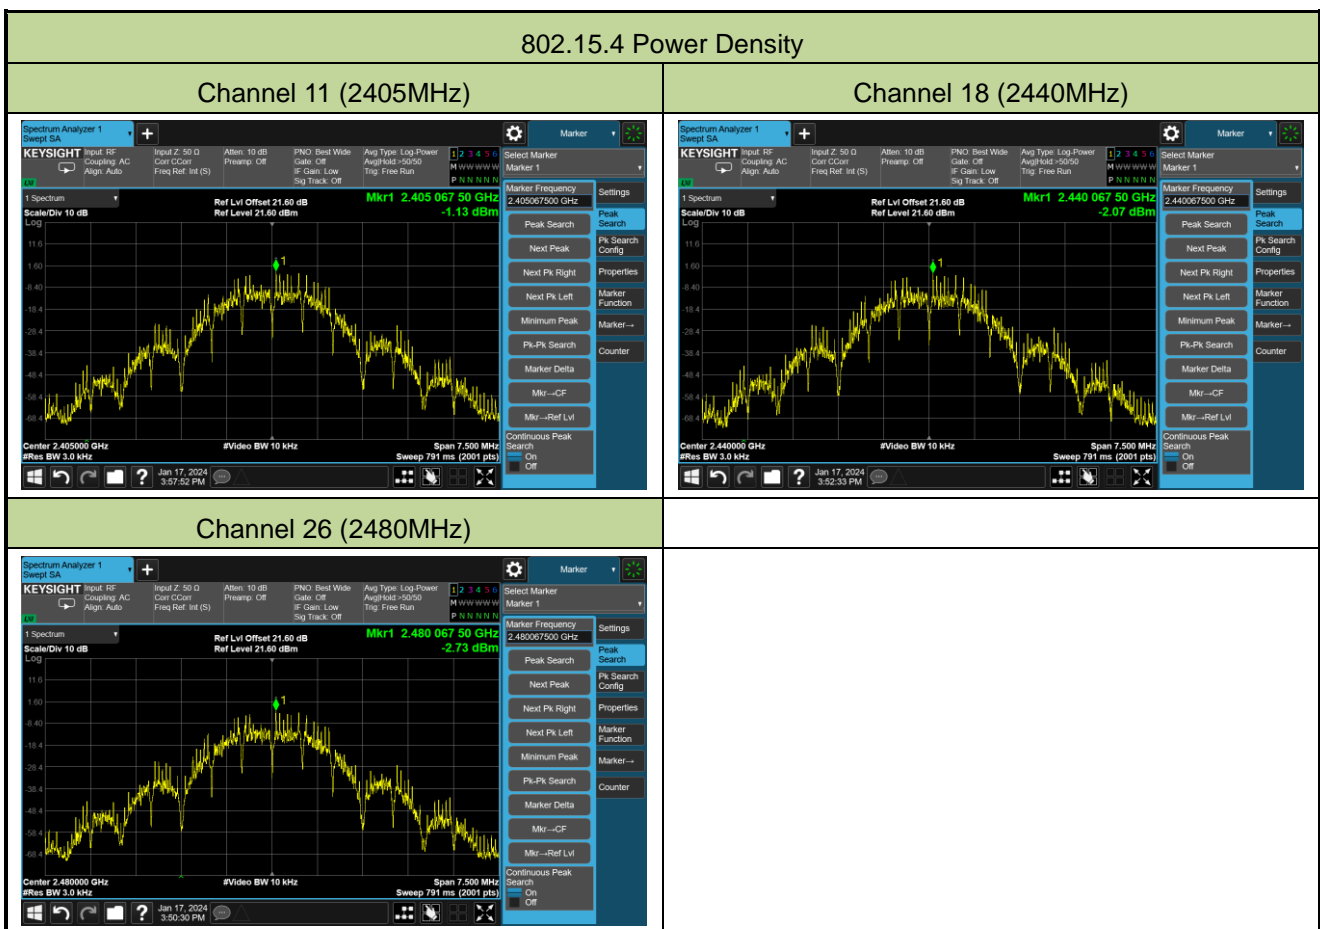

Mode 3

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-17		

Test Mode	Modulation Mode	Channel No.	Frequency (MHz)	PK PSD (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
802.15.4	O-QPSK	11	2405	-1.03	≤ 8.00	Pass
802.15.4	O-QPSK	18	2440	-0.80	≤ 8.00	Pass
802.15.4	O-QPSK	26	2480	-1.51	≤ 8.00	Pass

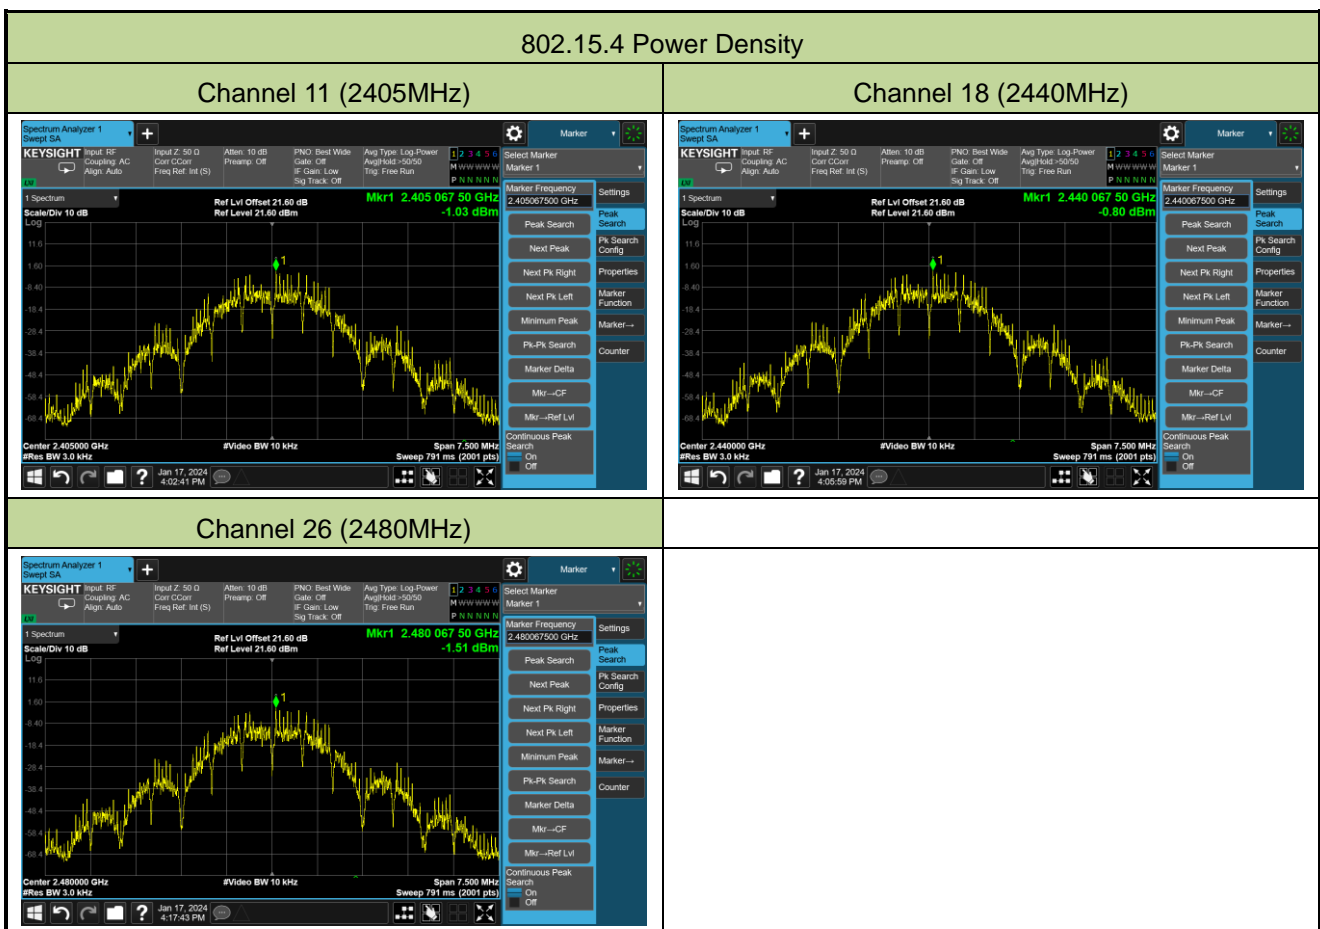


A.5 Conducted Band Edge and Out-of-Band Emissions Test Result

Mode 1

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-18	Filter	1#

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit (dBc)	Result
802.15.4	O-QPSK	11	2405	20	Pass
802.15.4	O-QPSK	18	2440	20	Pass
802.15.4	O-QPSK	26	2480	20	Pass

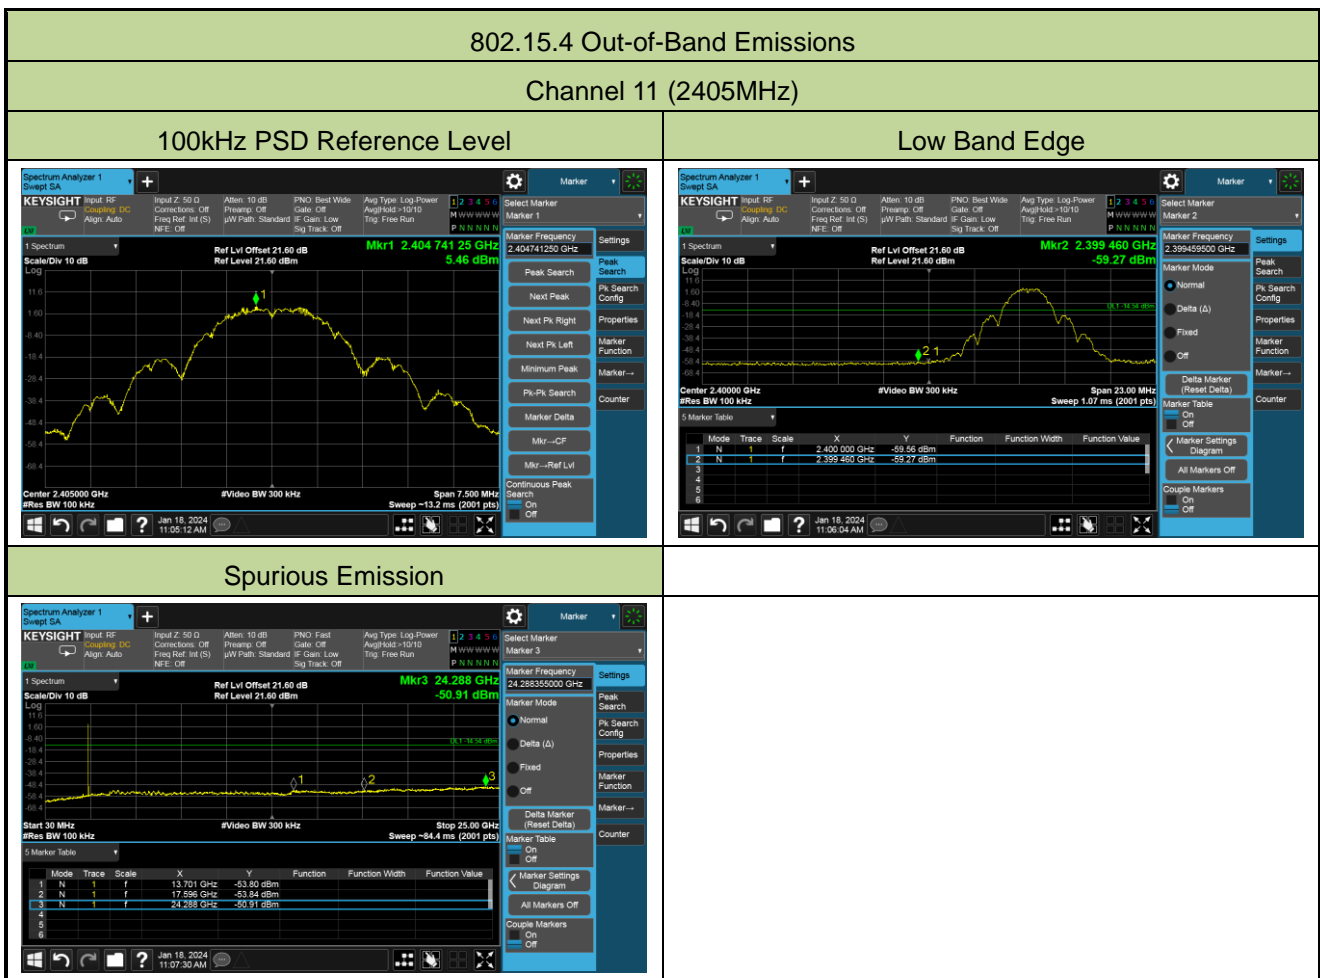


Channel 18 (2440MHz)

100kHz PSD Reference Level



Spurious Emission

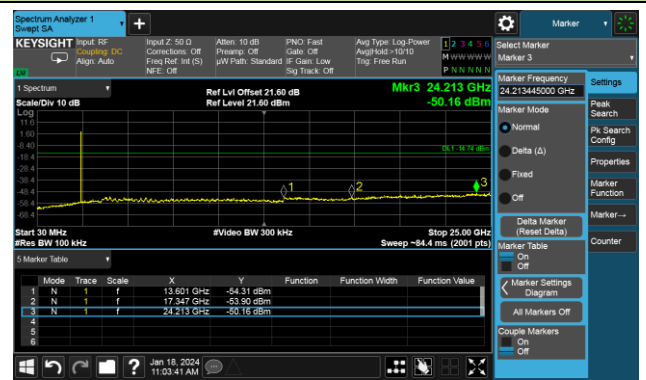

Channel 26 (2480MHz)


100kHz PSD Reference Level



High Band Edge



Spurious Emission

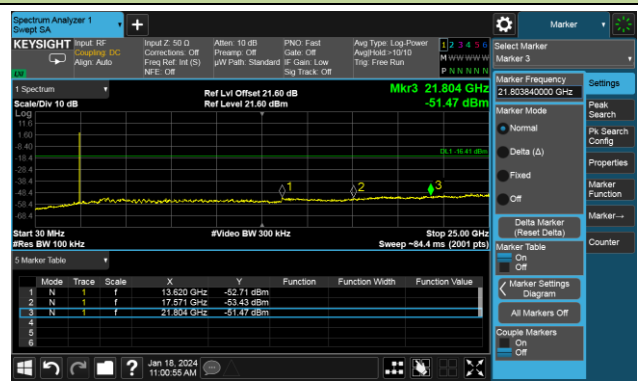

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-18	Filter	2#


Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit (dBc)	Result
802.15.4	O-QPSK	11	2405	20	Pass

802.15.4 Out-of-Band Emissions
Channel 11 (2405MHz)

100kHz PSD Reference Level	Low Band Edge
<p>Center: 2.405000 GHz #Video BW 300 kHz Sweep: -13.2 ms (2001 pts)</p>	<p>Center: 2.40000 GHz #Video BW 300 kHz Sweep: 1.07 ms (2001 pts)</p>
<p>Start: 30 MHz #Video BW 300 kHz Stop: 25.00 GHz Sweep: -84.4 ms (2001 pts)</p>	

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-18	Filter	3#

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit (dBc)	Result
802.15.4	O-QPSK	26	2480	20	Pass

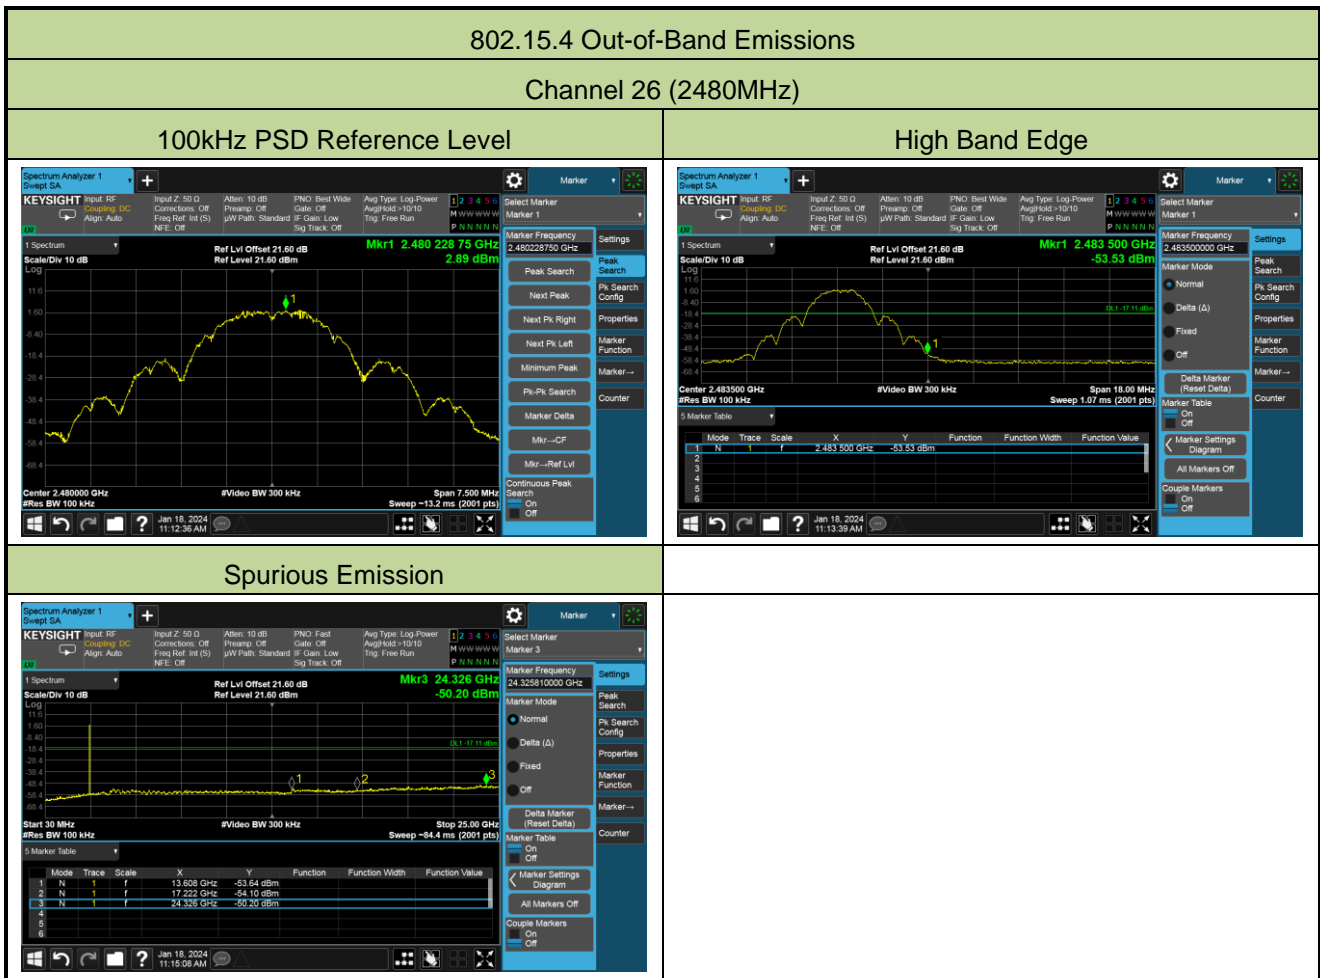

Mode 2

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-18	Filter	4#

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit (dBc)	Result
802.15.4	O-QPSK	11	2405	20	Pass
802.15.4	O-QPSK	18	2440	20	Pass
802.15.4	O-QPSK	26	2480	20	Pass

802.15.4 Out-of-Band Emissions

Channel 11 (2405MHz)


100kHz PSD Reference Level	Low Band Edge
<div style="text-align: center; background-color: #d9ead3; padding: 5px;"> <p>Spurious Emission</p> </div>	

Channel 18 (2440MHz)

100kHz PSD Reference Level



Spurious Emission

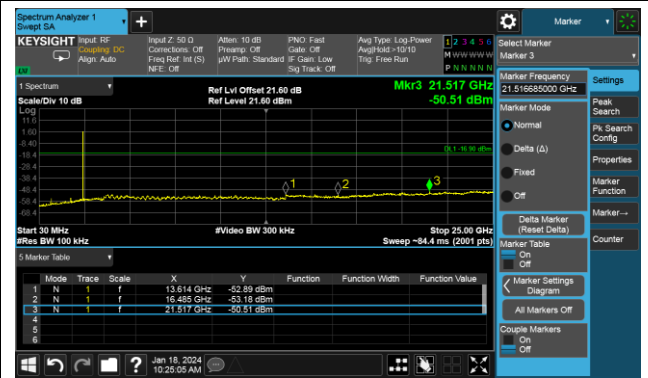


Channel 26 (2480MHz)



100kHz PSD Reference Level



High Band Edge

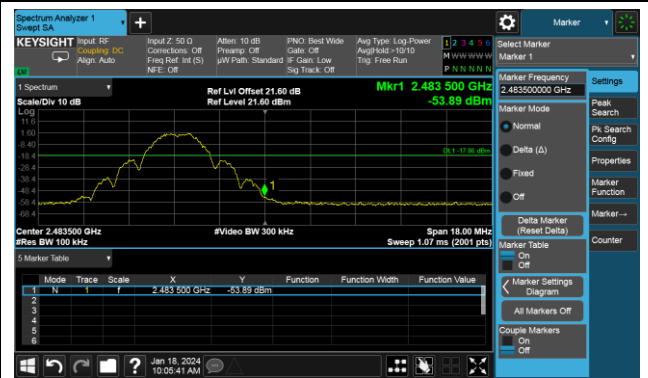

Spurious Emission

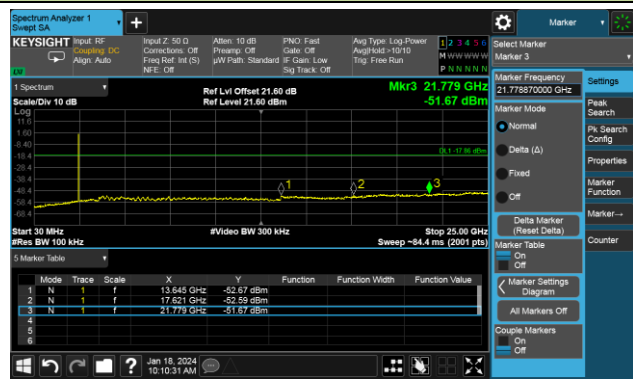

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-18	Filter	5#


Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit (dBc)	Result
802.15.4	O-QPSK	11	2405	20	Pass

802.15.4 Out-of-Band Emissions
Channel 11 (2405MHz)

100kHz PSD Reference Level	Low Band Edge																																								
<p>Center: 2.405200 GHz #Video BW 300 kHz Sweep: ~13.2 ms (2001 pts)</p> <table border="1" style="font-size: small;"> <thead> <tr> <th>Mode</th> <th>Trace</th> <th>Scale</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40526250 GHz</td> <td></td> <td></td> <td>4.93 dBm</td> </tr> </tbody> </table>	Mode	Trace	Scale	X	Y	Function	Function Width	Function Value	1	N	1	f	2.40526250 GHz			4.93 dBm	<p>Center: 2.400000 GHz #Video BW 300 kHz Sweep: 1.07 ms (2001 pts)</p> <table border="1" style="font-size: small;"> <thead> <tr> <th>Mode</th> <th>Trace</th> <th>Scale</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400000 GHz</td> <td></td> <td></td> <td>-59.35 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.399874 GHz</td> <td></td> <td></td> <td>-58.00 dBm</td> </tr> </tbody> </table>	Mode	Trace	Scale	X	Y	Function	Function Width	Function Value	1	N	1	f	2.400000 GHz			-59.35 dBm	2	N	1	f	2.399874 GHz			-58.00 dBm
Mode	Trace	Scale	X	Y	Function	Function Width	Function Value																																		
1	N	1	f	2.40526250 GHz			4.93 dBm																																		
Mode	Trace	Scale	X	Y	Function	Function Width	Function Value																																		
1	N	1	f	2.400000 GHz			-59.35 dBm																																		
2	N	1	f	2.399874 GHz			-58.00 dBm																																		
<div style="text-align: center; background-color: #d9ead3; padding: 5px;"> Spurious Emission </div> <p>Start: 30 MHz #Res BW 100 kHz Sweep: ~84.4 ms (2001 pts)</p> <table border="1" style="font-size: small;"> <thead> <tr> <th>Mode</th> <th>Trace</th> <th>Scale</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>13.724 GHz</td> <td></td> <td></td> <td>-53.76 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>15.239 GHz</td> <td></td> <td></td> <td>-53.69 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>21.529 GHz</td> <td></td> <td></td> <td>-50.96 dBm</td> </tr> </tbody> </table>	Mode	Trace	Scale	X	Y	Function	Function Width	Function Value	1	N	1	f	13.724 GHz			-53.76 dBm	2	N	1	f	15.239 GHz			-53.69 dBm	3	N	1	f	21.529 GHz			-50.96 dBm									
Mode	Trace	Scale	X	Y	Function	Function Width	Function Value																																		
1	N	1	f	13.724 GHz			-53.76 dBm																																		
2	N	1	f	15.239 GHz			-53.69 dBm																																		
3	N	1	f	21.529 GHz			-50.96 dBm																																		

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-18	Filter	6#

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit (dBc)	Result
802.15.4	O-QPSK	26	2480	20	Pass

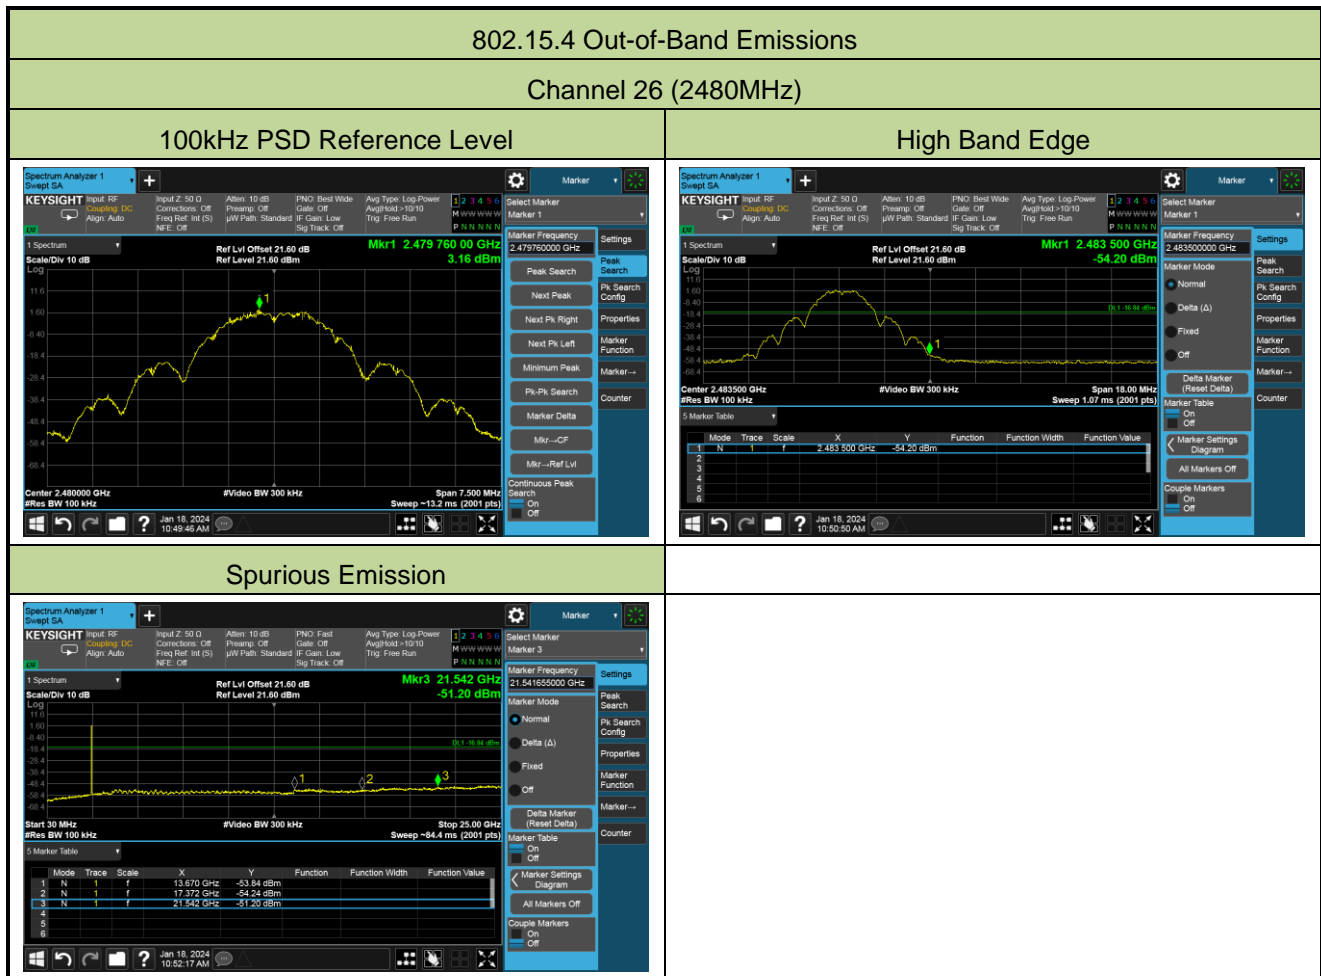

Mode 3

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-17 ~ 2024-01-18	Filter	7#

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit (dBc)	Result
802.15.4	O-QPSK	11	2405	20	Pass
802.15.4	O-QPSK	18	2440	20	Pass
802.15.4	O-QPSK	26	2480	20	Pass

802.15.4 Out-of-Band Emissions

Channel 11 (2405MHz)

100kHz PSD Reference Level

Low Band Edge


Spurious Emission

Channel 18 (2440MHz)

100kHz PSD Reference Level



Spurious Emission

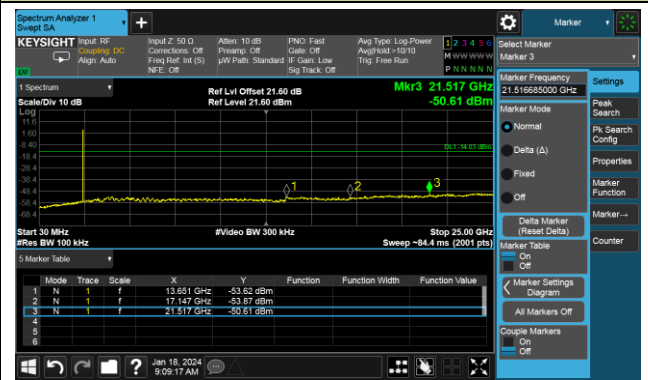


Channel 26 (2480MHz)


100kHz PSD Reference Level



High Band Edge

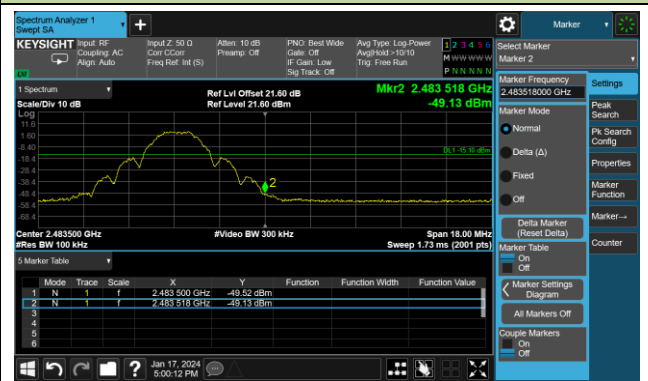

Spurious Emission



Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-18	Filter	8#


Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit (dBc)	Result
802.15.4	O-QPSK	11	2405	20	Pass

802.15.4 Out-of-Band Emissions
Channel 11 (2405MHz)

100kHz PSD Reference Level	Low Band Edge
<div style="text-align: center; background-color: #d9ead3; padding: 5px;"> Spurious Emission </div>	

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2024-01-18	Filter	9#

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit (dBc)	Result
802.15.4	O-QPSK	26	2480	20	Pass

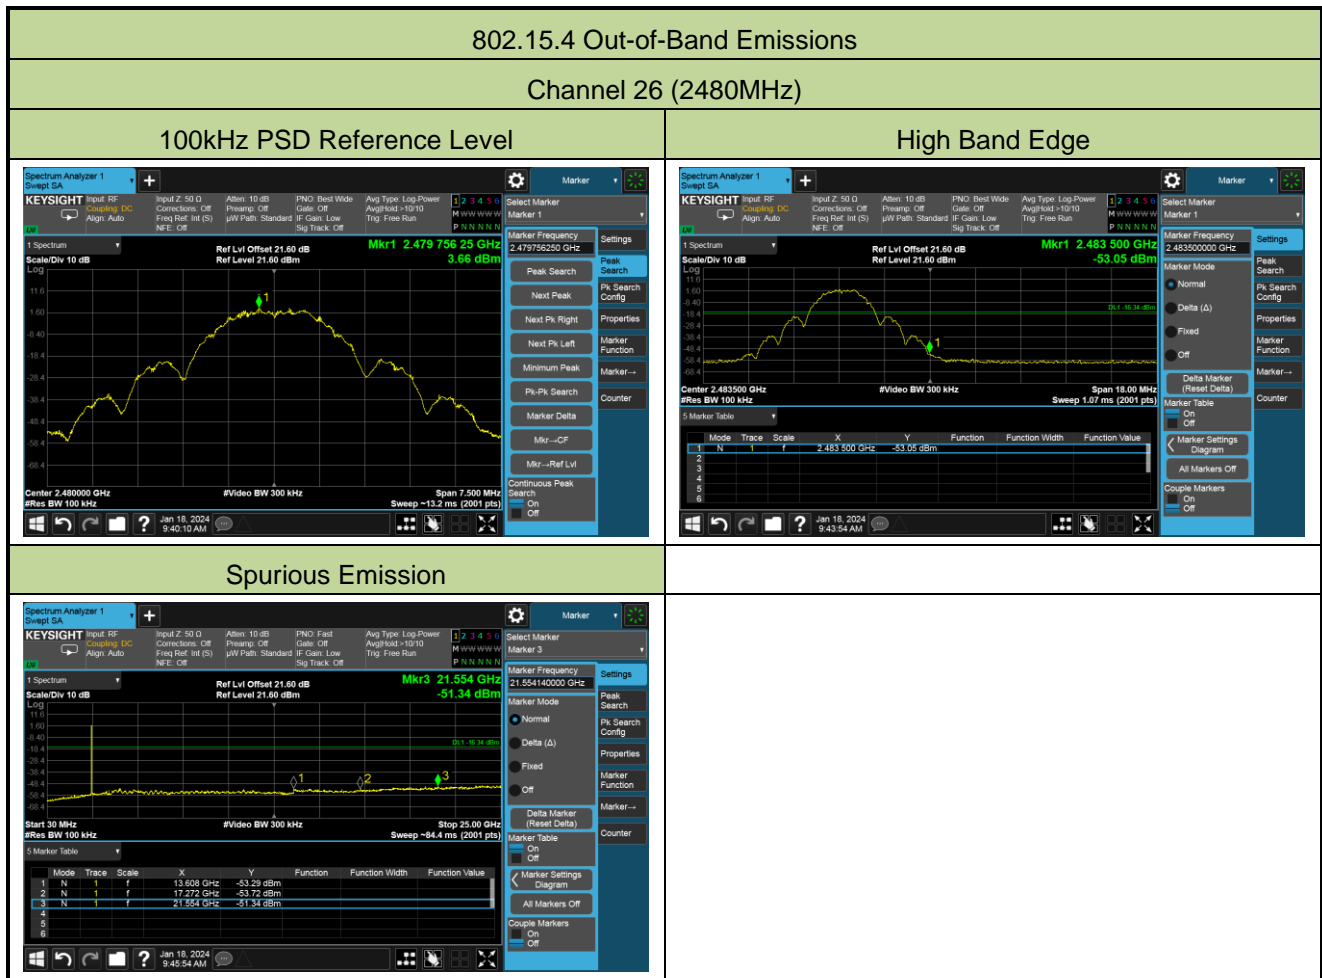

A.6 Radiated Spurious Emission Test Result

Mode 1

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	1#
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
11	4969.5	35.1	3.5	38.6	74.0	-35.4	Peak	Horizontal
	8352.5	35.3	8.7	44.0	74.0	-30.0	Peak	Horizontal
	12271.0	35.6	12.5	48.1	74.0	-25.9	Peak	Horizontal
	4842.0	36.7	3.1	39.8	74.0	-34.2	Peak	Vertical
	7434.5	35.5	8.5	44.0	74.0	-30.0	Peak	Vertical
	11565.5	37.1	13.3	50.4	74.0	-23.6	Peak	Vertical
18	5054.5	36.5	3.7	40.2	74.0	-33.8	Peak	Horizontal
	7570.5	35.7	8.3	44.0	74.0	-30.0	Peak	Horizontal
	11990.5	37.1	12.4	49.5	74.0	-24.5	Peak	Horizontal
	4859.0	35.1	2.9	38.0	74.0	-36.0	Peak	Vertical
	7502.5	36.2	8.5	44.7	74.0	-29.3	Peak	Vertical
	11931.0	36.3	12.3	48.6	74.0	-25.4	Peak	Vertical
26	4978.0	36.7	3.6	40.3	74.0	-33.7	Peak	Horizontal
	8446.0	35.6	9.0	44.6	74.0	-29.4	Peak	Horizontal
	12228.5	36.8	12.5	49.3	74.0	-24.7	Peak	Horizontal
	4859.0	35.0	2.9	37.9	74.0	-36.1	Peak	Vertical
	8310.0	34.1	8.7	42.8	74.0	-31.2	Peak	Vertical
	11497.5	36.4	13.7	50.1	74.0	-23.9	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-26	Filter	2#
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
11	4944.0	36.3	3.3	39.6	74.0	-34.4	Peak	Horizontal
	7638.5	36.4	8.3	44.7	74.0	-29.3	Peak	Horizontal
	11574.0	36.7	13.2	49.9	74.0	-24.1	Peak	Horizontal
	4918.5	36.4	3.2	39.6	74.0	-34.4	Peak	Vertical
	8199.5	35.5	8.9	44.4	74.0	-29.6	Peak	Vertical
	11497.5	36.0	13.7	49.7	74.0	-24.3	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-26	Filter	3#
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
26	4833.5	37.0	3.1	40.1	74.0	-33.9	Peak	Horizontal
	7468.5	35.2	8.6	43.8	74.0	-30.2	Peak	Horizontal
	11761.0	36.4	12.5	48.9	74.0	-25.1	Peak	Horizontal
	4978.0	36.4	3.6	40.0	74.0	-34.0	Peak	Vertical
	7638.5	35.6	8.3	43.9	74.0	-30.1	Peak	Vertical
	11922.5	37.0	12.4	49.4	74.0	-24.6	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Mode 2

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	4#
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
11	4799.5	36.5	3.1	39.6	74.0	-34.4	Peak	Horizontal
	7434.5	34.5	8.5	43.0	74.0	-31.0	Peak	Horizontal
	12041.5	36.9	12.5	49.4	74.0	-24.6	Peak	Horizontal
	5029.0	36.6	3.6	40.2	74.0	-33.8	Peak	Vertical
	7502.5	35.3	8.5	43.8	74.0	-30.2	Peak	Vertical
	11786.5	35.9	12.3	48.2	74.0	-25.8	Peak	Vertical
18	5071.5	38.2	3.8	42.0	74.0	-32.0	Peak	Horizontal
	8352.5	35.1	8.7	43.8	74.0	-30.2	Peak	Horizontal
	12339.0	37.1	12.3	49.4	74.0	-24.6	Peak	Horizontal
	4765.5	37.1	2.8	39.9	74.0	-34.1	Peak	Vertical
	8250.5	35.9	8.7	44.6	74.0	-29.4	Peak	Vertical
	11684.5	36.1	12.8	48.9	74.0	-25.1	Peak	Vertical
26	4748.5	35.1	2.8	37.9	74.0	-36.1	Peak	Horizontal
	7732.0	34.2	8.2	42.4	74.0	-31.6	Peak	Horizontal
	11327.5	35.4	13.3	48.7	74.0	-25.3	Peak	Horizontal
	4808.0	36.9	3.0	39.9	74.0	-34.1	Peak	Vertical
	8420.5	34.3	9.0	43.3	74.0	-30.7	Peak	Vertical
	11931.0	37.1	12.3	49.4	74.0	-24.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-26	Filter	5#
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
11	4808.0	37.1	3.0	40.1	74.0	-33.9	Peak	Horizontal
	8276.0	35.2	8.5	43.7	74.0	-30.3	Peak	Horizontal
	11803.5	36.4	12.2	48.6	74.0	-25.4	Peak	Horizontal
	4808.0	36.5	3.0	39.5	74.0	-34.5	Peak	Vertical
	8310.0	35.2	8.7	43.9	74.0	-30.1	Peak	Vertical
	11684.5	36.4	12.8	49.2	74.0	-24.8	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-26	Filter	6#
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB/m)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
26	4918.5	37.3	3.2	40.5	74.0	-33.5	Peak	Horizontal
	8216.5	35.8	8.8	44.6	74.0	-29.4	Peak	Horizontal
	11710.0	36.1	12.5	48.6	74.0	-25.4	Peak	Horizontal
	5012.0	35.3	3.5	38.8	74.0	-35.2	Peak	Vertical
	8259.0	34.5	8.7	43.2	74.0	-30.8	Peak	Vertical
	11897.0	35.2	12.2	47.4	74.0	-26.6	Peak	Vertical

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Mode 3

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	7#
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
11	4910.0	37.9	3.2	41.1	74.0	-32.9	Peak	Horizontal
	8310.0	36.1	8.7	44.8	74.0	-29.2	Peak	Horizontal
	11531.5	37.2	13.5	50.7	74.0	-23.3	Peak	Horizontal
	4986.5	37.5	3.6	41.1	74.0	-32.9	Peak	Vertical
	8420.5	36.2	9.0	45.2	74.0	-28.8	Peak	Vertical
	11072.5	36.3	14.0	50.3	74.0	-23.7	Peak	Vertical
18	4986.5	37.0	3.6	40.6	74.0	-33.4	Peak	Horizontal
	7536.5	36.0	8.5	44.5	74.0	-29.5	Peak	Horizontal
	11506.0	36.8	13.6	50.4	74.0	-23.6	Peak	Horizontal
	4799.5	36.9	3.1	40.0	74.0	-34.0	Peak	Vertical
	7375.0	36.5	8.6	45.1	74.0	-28.9	Peak	Vertical
	11914.0	37.7	12.4	50.1	74.0	-23.9	Peak	Vertical
26	4816.5	37.1	3.0	40.1	74.0	-33.9	Peak	Horizontal
	8259.0	35.9	8.7	44.6	74.0	-29.4	Peak	Horizontal
	11480.5	36.1	13.6	49.7	74.0	-24.3	Peak	Horizontal
	4901.5	37.6	3.2	40.8	74.0	-33.2	Peak	Vertical
	7519.5	37.2	8.4	45.6	74.0	-28.4	Peak	Vertical
	11531.5	36.1	13.5	49.6	74.0	-24.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-26	Filter	8#
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
11	4901.5	35.9	3.2	39.1	74.0	-34.9	Peak	Horizontal
	8412.0	36.1	8.9	45.0	74.0	-29.0	Peak	Horizontal
	11931.0	36.3	12.3	48.6	74.0	-25.4	Peak	Horizontal
	5046.0	37.2	3.7	40.9	74.0	-33.1	Peak	Vertical
	8352.5	34.9	8.7	43.6	74.0	-30.4	Peak	Vertical
	11480.5	36.8	13.6	50.4	74.0	-23.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-26	Filter	9#
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
26	4876.0	35.9	3.1	39.0	74.0	-35.0	Peak	Horizontal
	8216.5	36.0	8.8	44.8	74.0	-29.2	Peak	Horizontal
	11914.0	36.1	12.4	48.5	74.0	-25.5	Peak	Horizontal
	4791.0	37.7	3.2	40.9	74.0	-33.1	Peak	Vertical
	7536.5	36.2	8.5	44.7	74.0	-29.3	Peak	Vertical
	11659.0	36.9	12.8	49.7	74.0	-24.3	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission 9kHz ~ 30MHz:

Site: WZ-AC2	Test Date: 2024-03-10
Limit: FCC_Part15.209_RSE	Engineer: Bob Zhang
Probe: FMZB1519_0.009-30MHz	Polarity: Coaxial
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by ZigBee at 2405MHz	

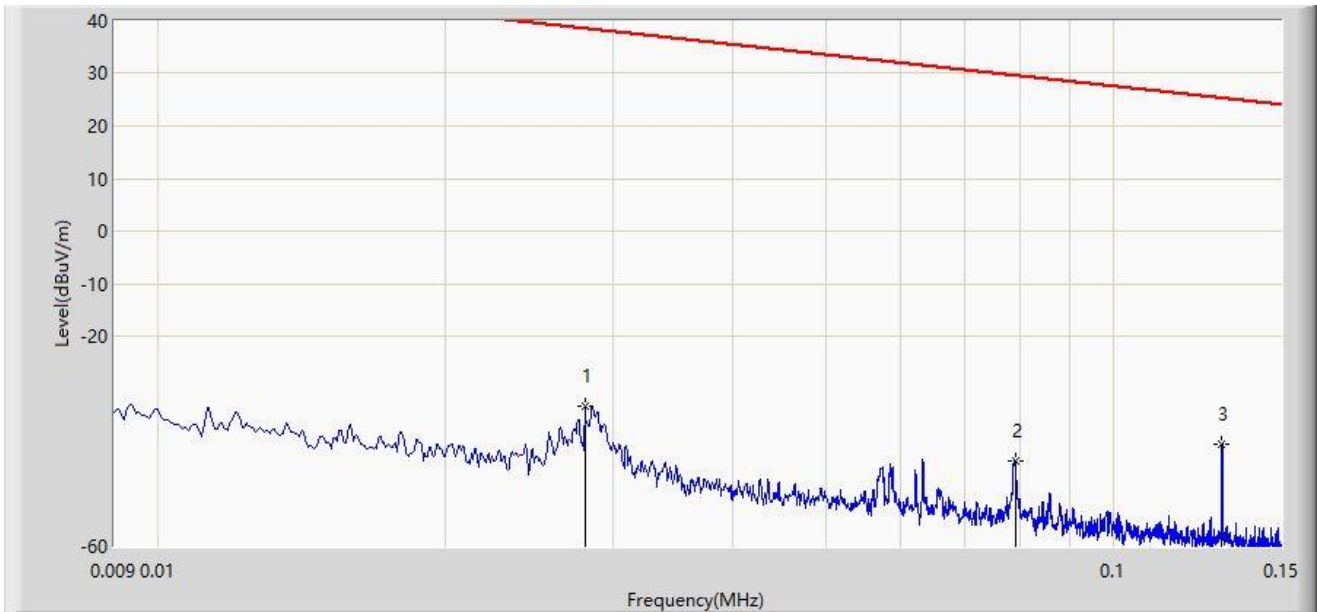

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		0.028	-33.457	27.437	-72.104	38.647	-60.893	PK
2		0.079	-43.778	18.297	-73.421	29.643	-62.076	PK
3	*	0.130	-40.574	21.573	-65.892	25.319	-62.147	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC2	Test Date: 2024-03-10
Limit: FCC_Part15.209_RSE	Engineer: Bob Zhang
Probe: FMZB1519_0.009-30MHz	Polarity: Coplanar
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by ZigBee at 2405MHz	

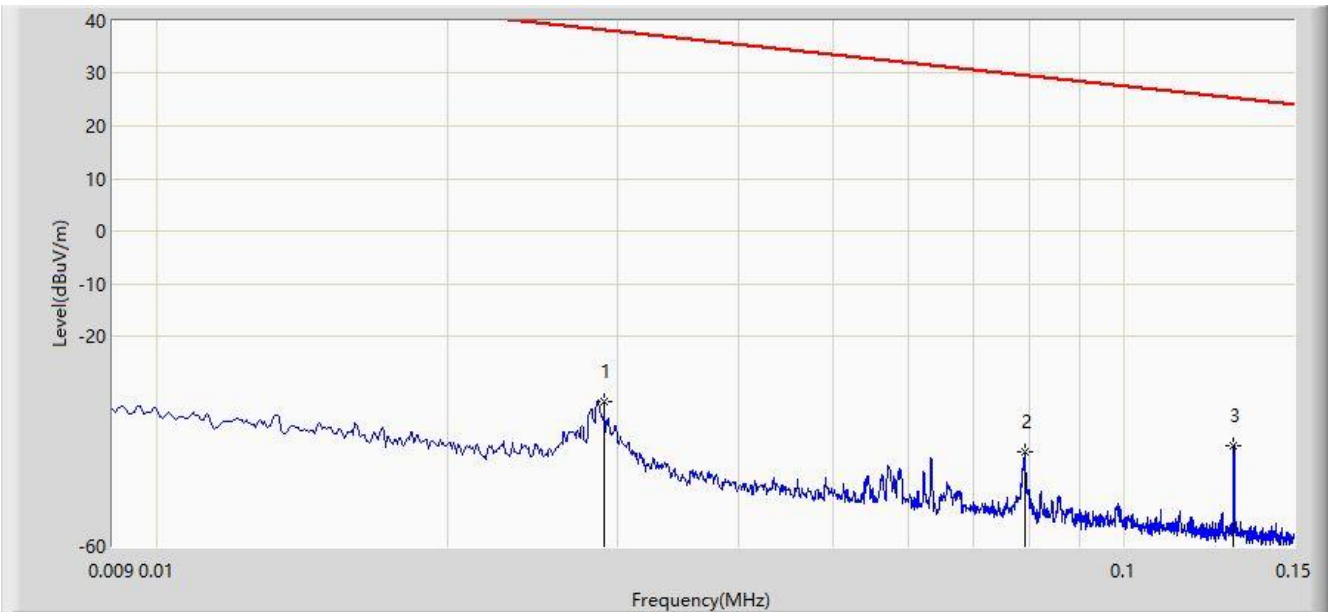

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		0.029	-32.332	28.652	-70.674	38.342	-60.984	PK
2		0.079	-42.094	19.981	-71.737	29.643	-62.076	PK
3	*	0.130	-40.830	21.317	-66.148	25.319	-62.147	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC2	Test Date: 2024-03-10
Limit: FCC_Part15.209_RSE	Engineer: Bob Zhang
Probe: FMZB1519_0.009-30MHz	Polarity: Coaxial
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by ZigBee at 2405MHz	

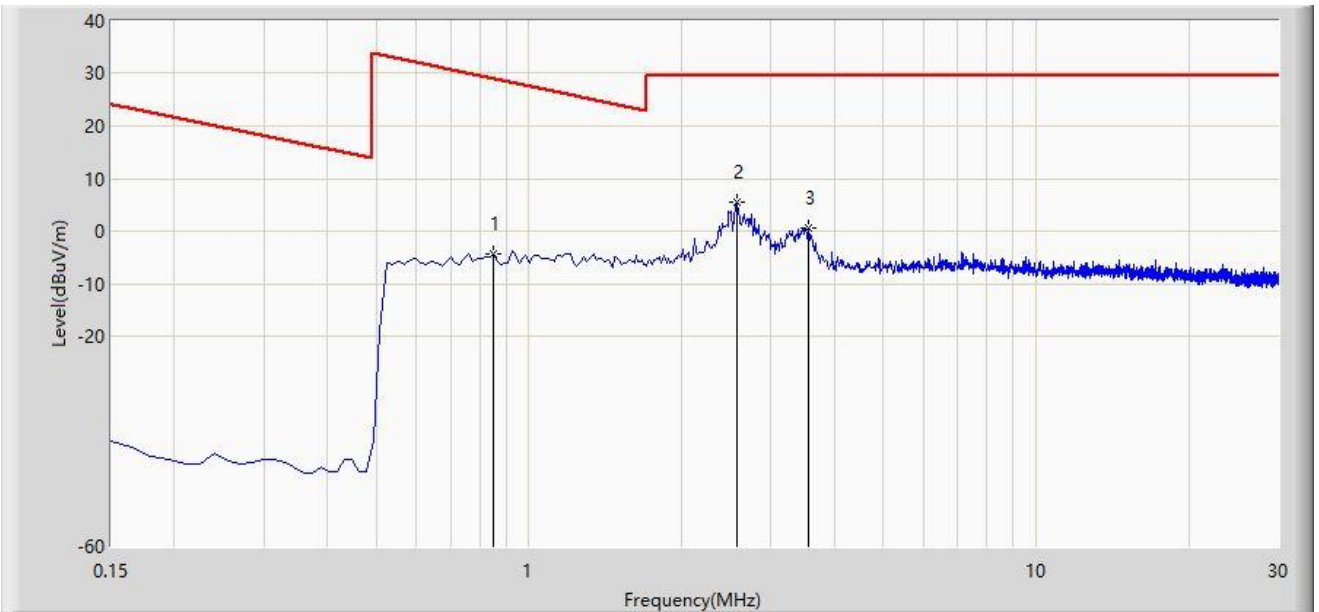

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		0.851	-4.290	17.496	-33.309	29.019	-21.787	PK
2	*	2.568	5.403	27.210	-24.097	29.500	-21.807	PK
3		3.553	0.536	22.301	-28.964	29.500	-21.765	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC2	Test Date: 2024-03-10
Limit: FCC_Part15.209_RSE	Engineer: Bob Zhang
Probe: FMZB1519_0.009-30MHz	Polarity: Coplanar
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by ZigBee at 2405MHz	

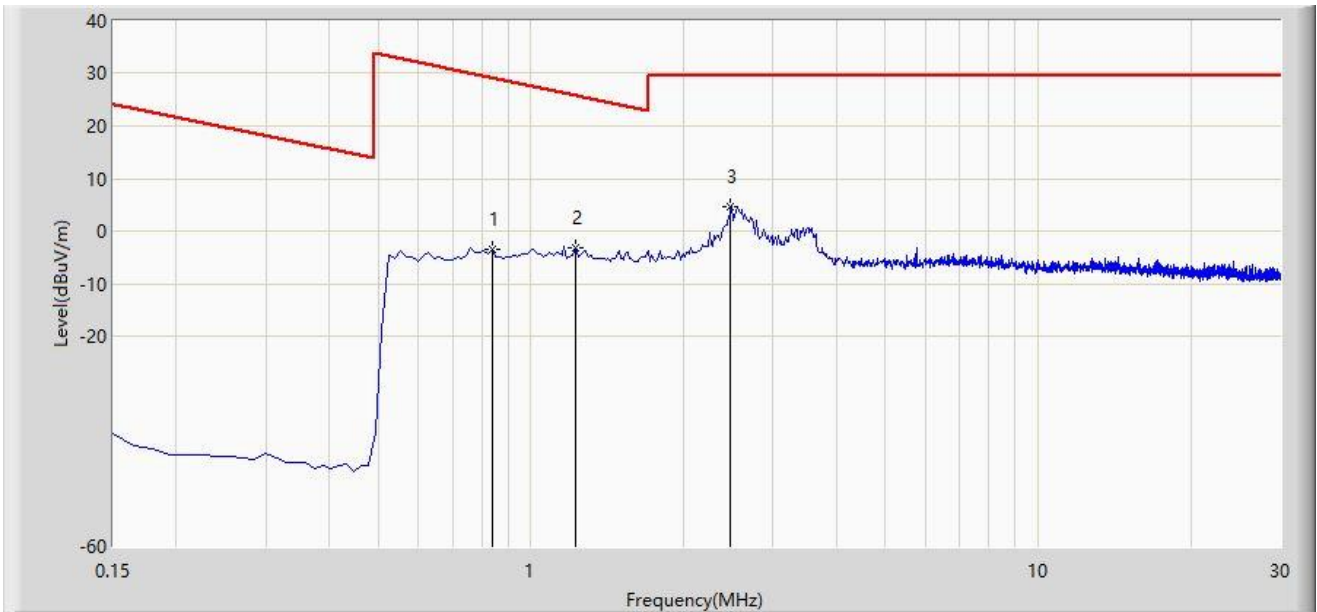

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		0.837	-3.544	18.247	-32.706	29.163	-21.790	PK
2		1.225	-3.078	18.717	-28.942	25.864	-21.795	PK
3	*	2.478	4.512	26.324	-24.988	29.500	-21.812	PK

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

The Result of Radiated Emission below 1GHz:

Site: WZ-AC2	Test Date: 2024-03-15
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bob Zhang
Probe: VULB9162_30-7000MHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by ZigBee at 2405MHz	

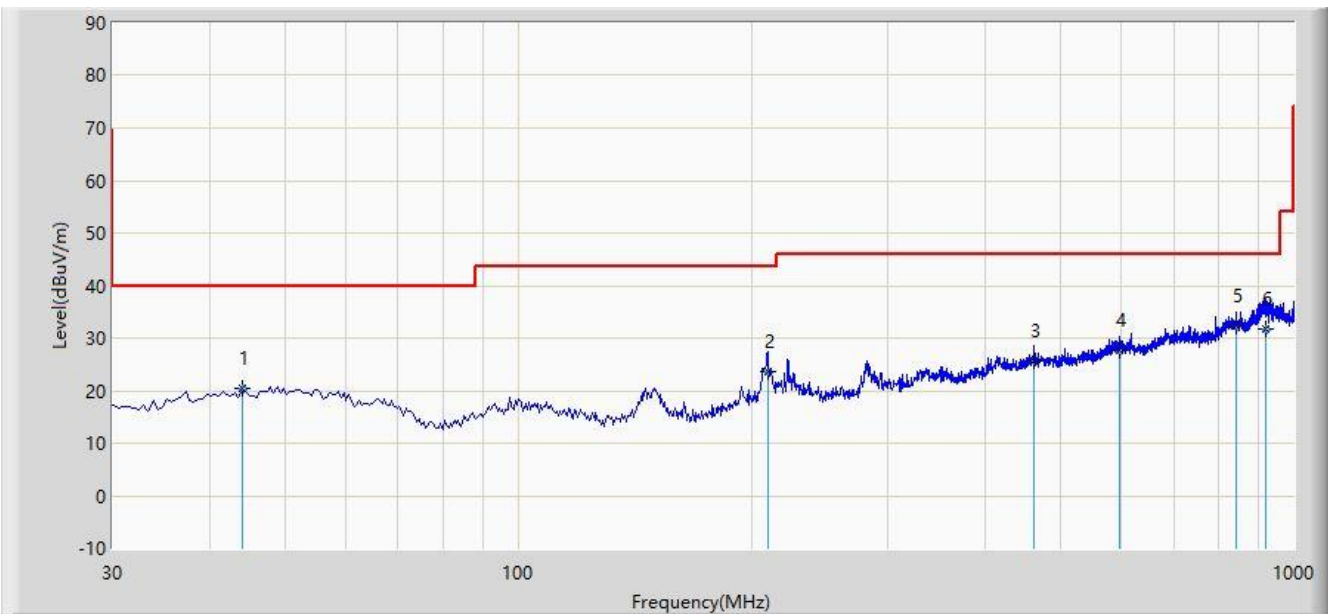


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		44.065	20.370	0.200	-19.630	40.000	20.171	QP
2		209.935	23.488	5.200	-20.012	43.500	18.287	QP
3		462.620	25.514	1.100	-20.486	46.000	24.414	QP
4		597.450	27.790	0.200	-18.210	46.000	27.590	QP
5	*	842.375	32.320	1.100	-13.680	46.000	31.220	QP
6		920.460	31.769	0.800	-14.231	46.000	30.969	QP

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-03-15
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bob Zhang
Probe: VULB9162_30-7000MHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by ZigBee at 2405MHz	

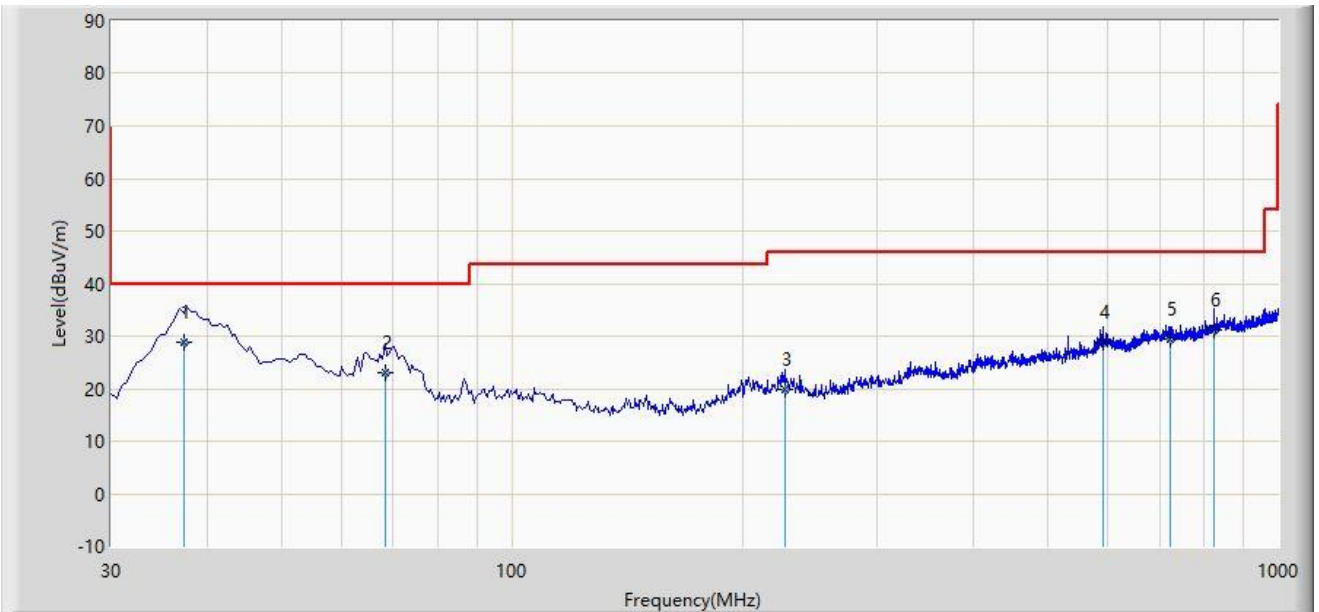

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	37.275	28.703	10.500	-11.297	40.000	18.204	QP
2		68.315	23.091	6.200	-16.909	40.000	16.891	QP
3		226.910	19.926	0.700	-26.074	46.000	19.226	QP
4		591.630	28.752	1.200	-17.248	46.000	27.552	QP
5		722.095	29.408	0.600	-16.592	46.000	28.808	QP
6		823.460	31.169	0.300	-14.831	46.000	30.869	QP


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

The Result of Radiated Emission 18 ~ 25GHz:

Site: WZ-AC2	Test Date: 2024-03-16
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bob Zhang
Probe: BBHA9170_549_18-40GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by ZigBee at 2405MHz	

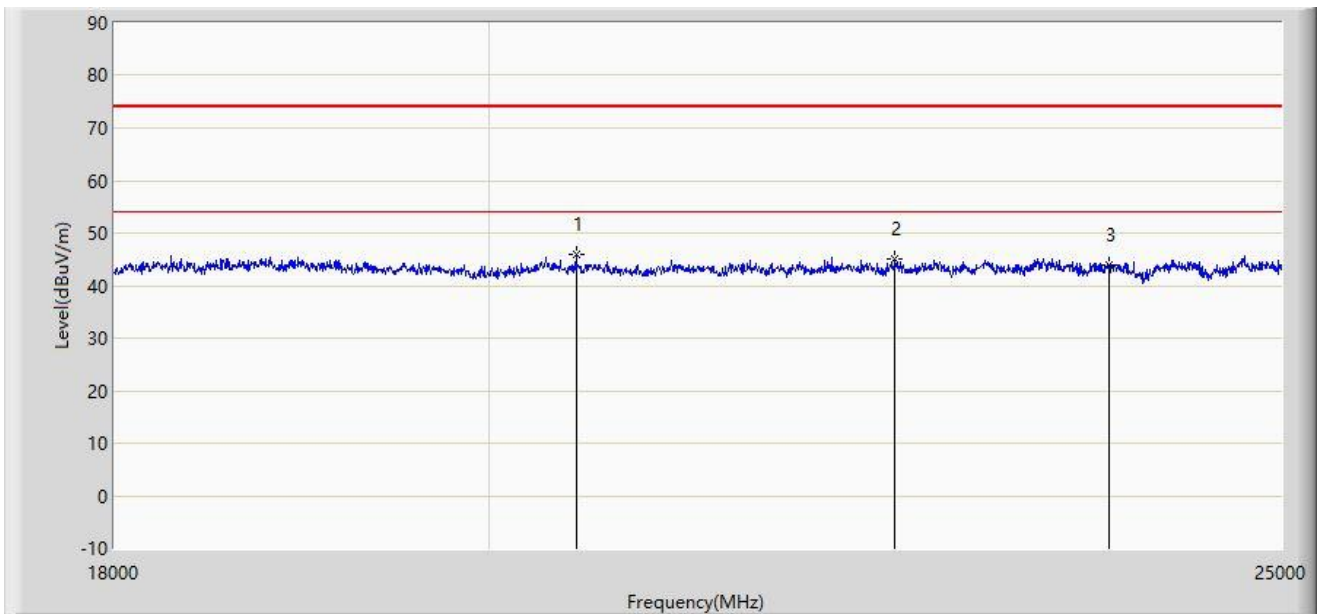

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	20500.000	45.841	55.462	-28.159	74.000	-9.621	PK
2		22424.000	44.966	52.651	-29.034	74.000	-7.685	PK
3		23816.000	43.983	50.962	-30.017	74.000	-6.978	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

Site: WZ-AC2	Test Date: 2024-03-16
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bob Zhang
Probe: BBHA9170_549_18-40GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by ZigBee at 2405MHz	

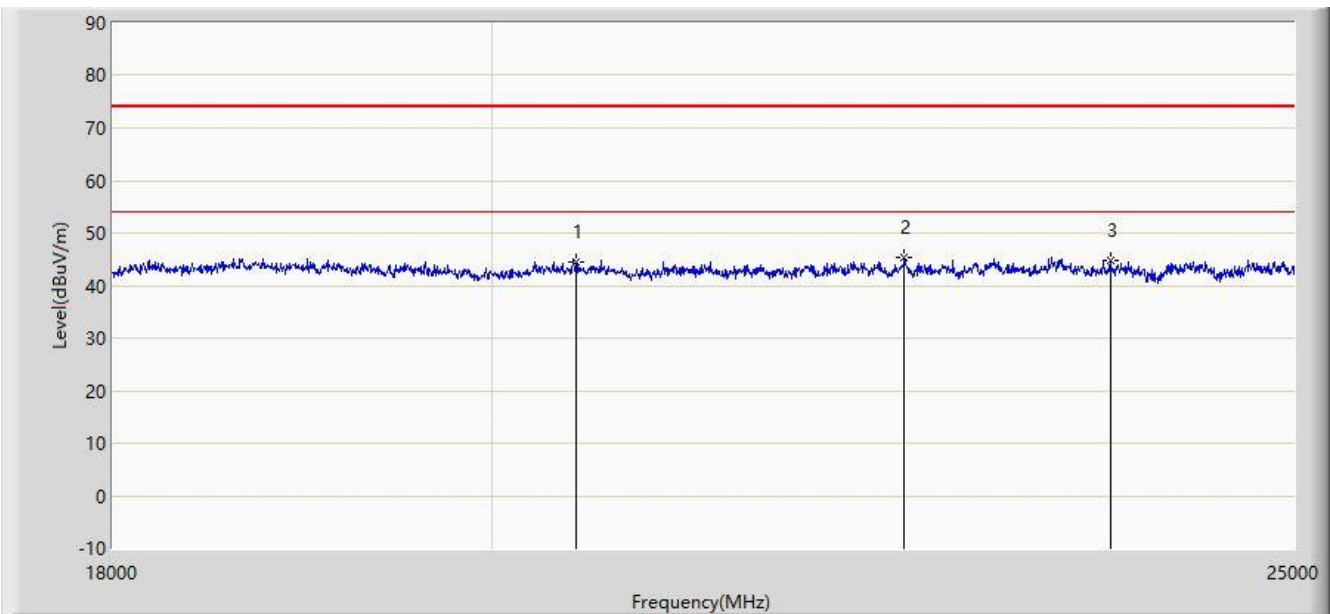

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		20480.000	44.608	54.051	-29.392	74.000	-9.443	PK
2	*	22436.000	45.260	53.055	-28.740	74.000	-7.796	PK
3		23756.000	44.806	52.335	-29.194	74.000	-7.530	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

A.7 Radiated Restricted Band Edge Test Result

Mode 1 – Filter 1#

Site: WZ-AC1	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by ZigBee at 2405MHz	

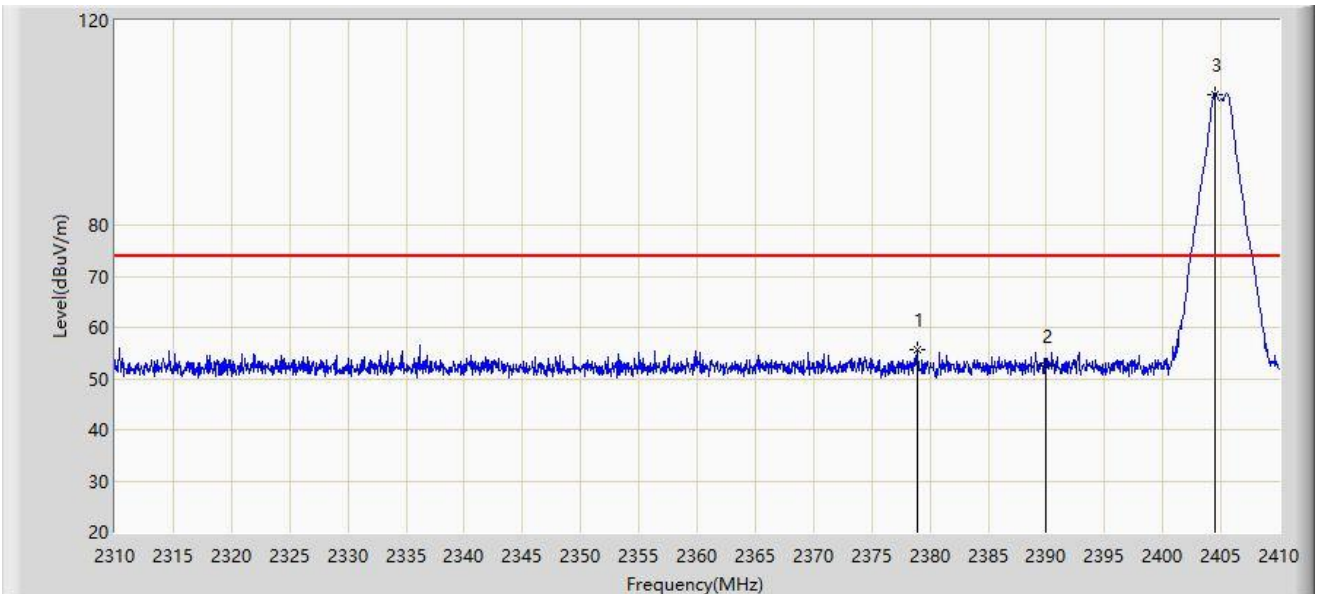


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2378.900	55.573	24.294	-18.427	74.000	31.279	PK
2		2390.000	52.437	21.183	-21.563	74.000	31.254	PK
3		2404.450	105.598	74.341	N/A	N/A	31.257	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by ZigBee at 2405MHz	

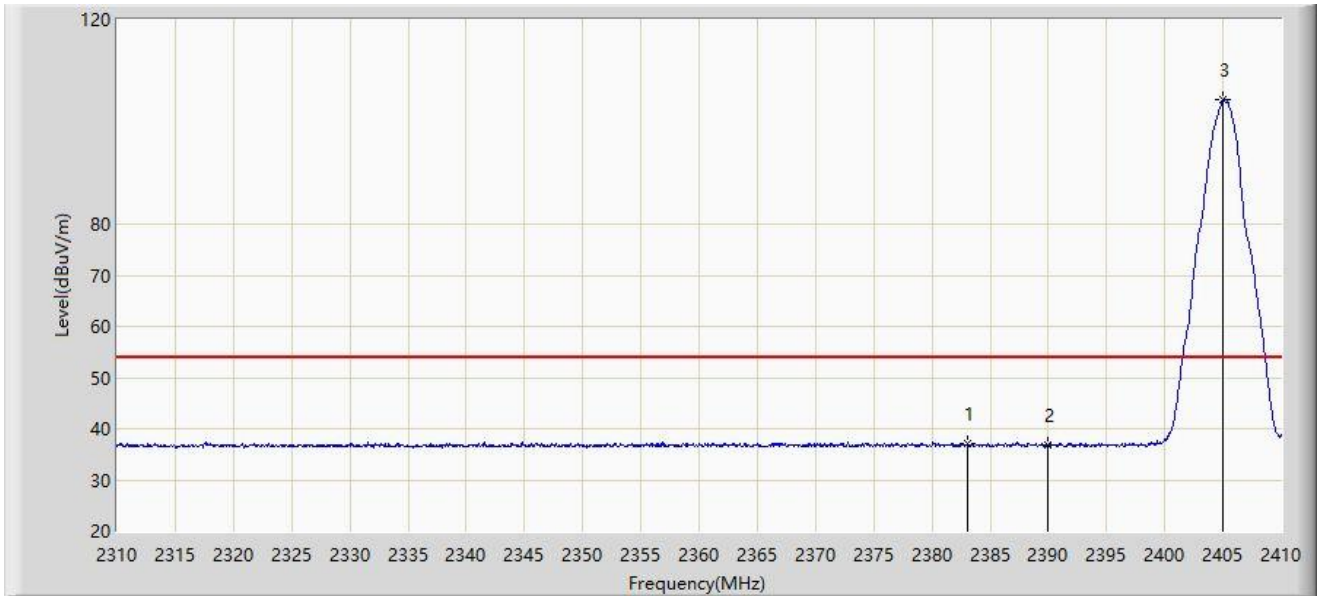


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2383.100	37.235	5.972	-16.765	54.000	31.263	AV
2		2390.000	36.816	5.562	-17.184	54.000	31.254	AV
3		2405.050	104.368	73.111	N/A	N/A	31.256	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by ZigBee at 2405MHz	

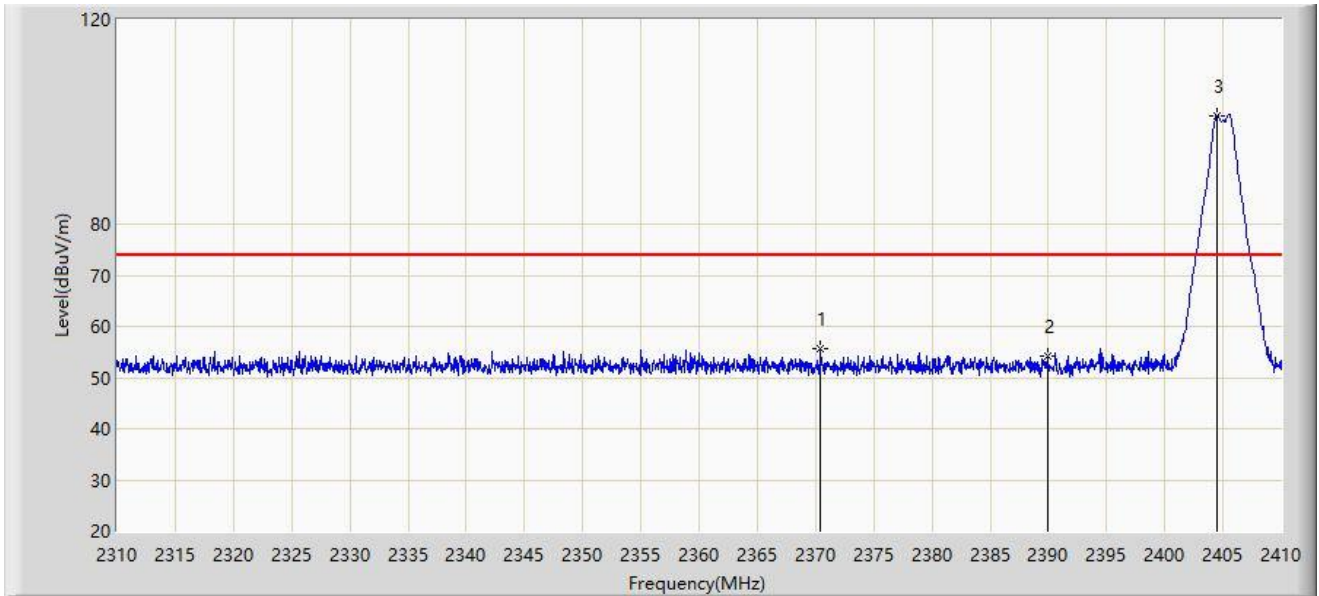


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2370.450	55.558	24.250	-18.442	74.000	31.308	PK
2		2390.000	54.125	22.871	-19.875	74.000	31.254	PK
3		2404.450	101.236	69.979	N/A	N/A	31.257	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-25
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by ZigBee at 2405MHz	

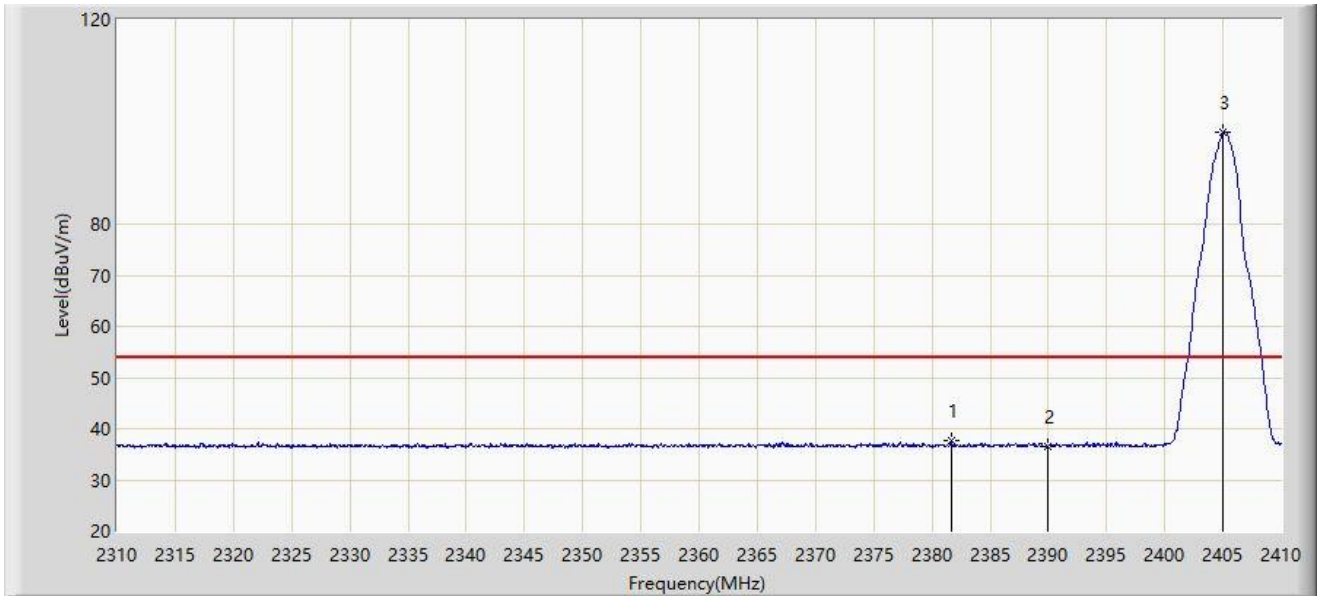

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2381.650	37.544	6.276	-16.456	54.000	31.268	AV
2		2390.000	36.617	5.363	-17.383	54.000	31.254	AV
3		2405.000	97.915	66.658	N/A	N/A	31.256	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).