
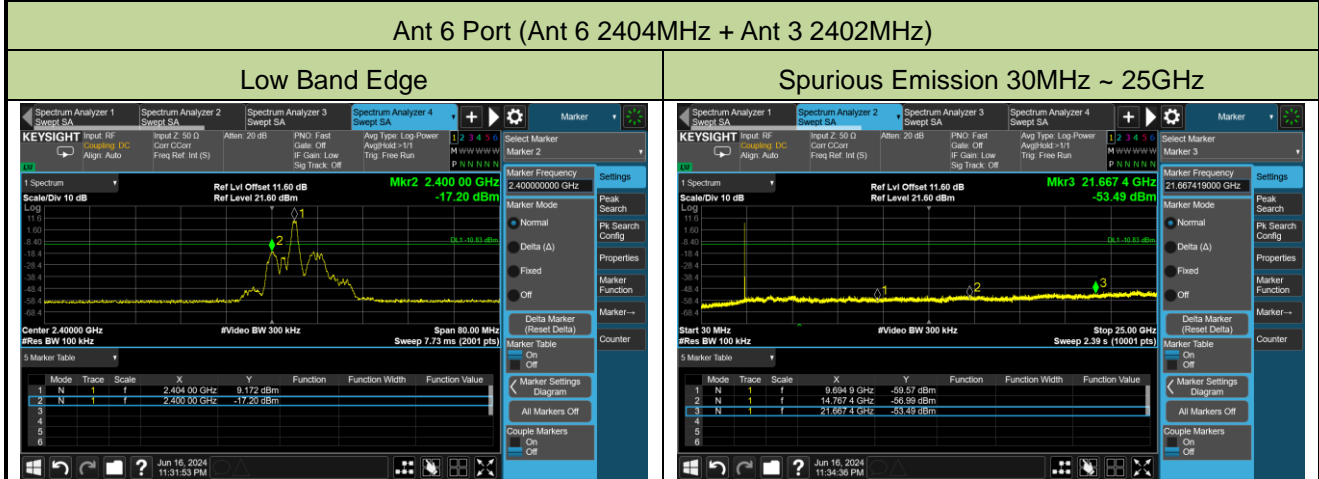


Mode 5

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2024-06-16		

Ant 6 Frequency (MHz)	Ant 3 Frequency (MHz)	Limit (dBc)	Result
2402	2404	20	Pass
2404	2402	20	Pass
2478	2480	20	Pass
2480	2478	20	Pass

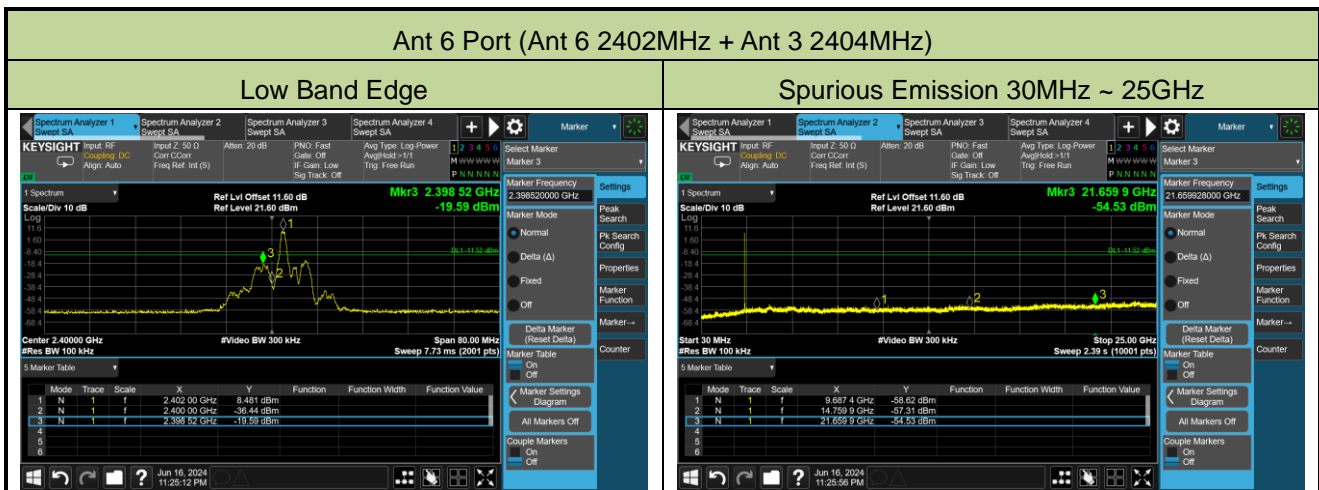


Ant 6 Port (Ant 6 2478MHz + Ant 3 2480MHz)

High Band Edge




Spurious Emission 30MHz ~ 25GHz

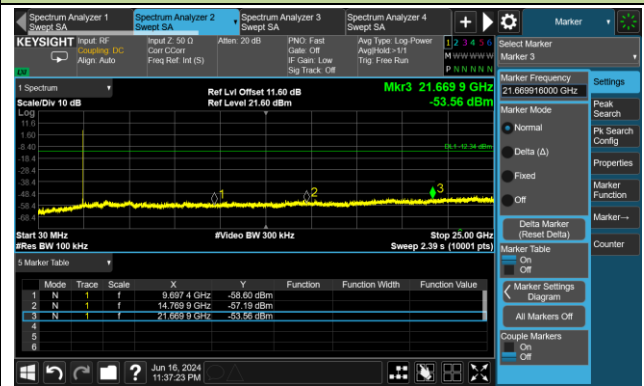


Ant 6 Port (Ant 6 2480MHz + Ant 3 2478MHz)

High Band Edge

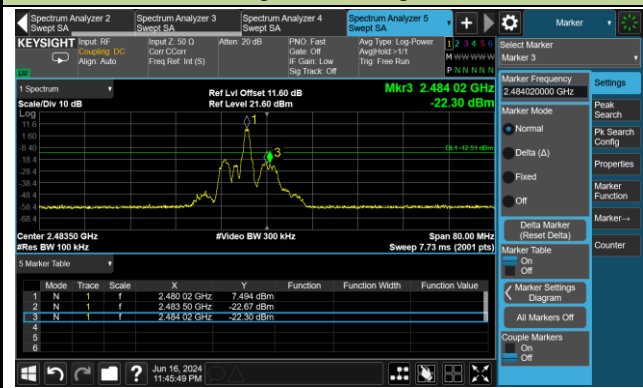


Spurious Emission 30MHz ~ 25GHz

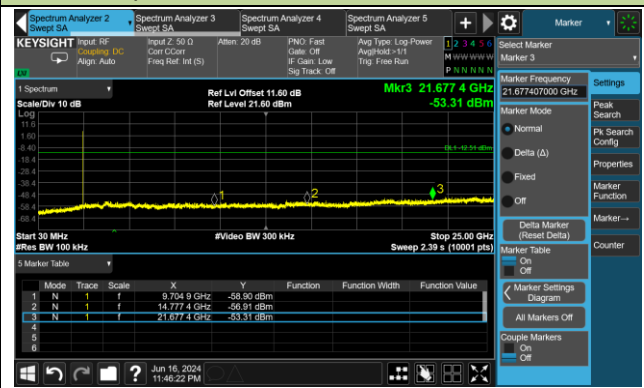


Ant 3 Port (Ant 6 2402MHz + Ant 3 2404MHz)

Low Band Edge

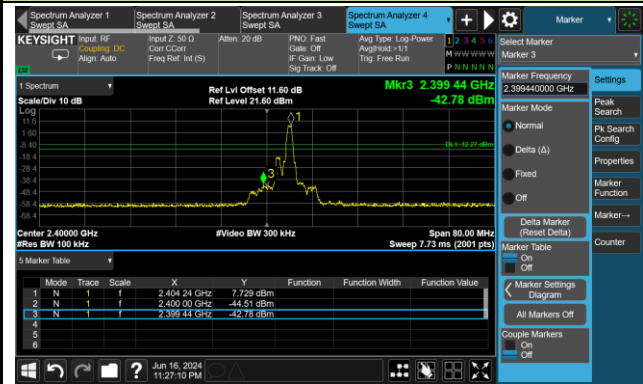


Spurious Emission 30MHz ~ 25GHz

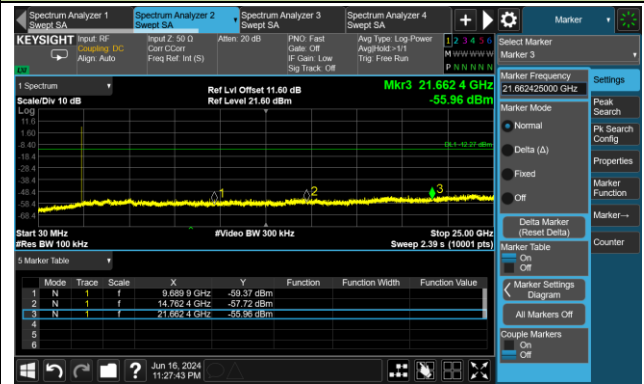


Ant 3 Port (Ant 6 2404MHz + Ant 3 2402MHz)

Low Band Edge

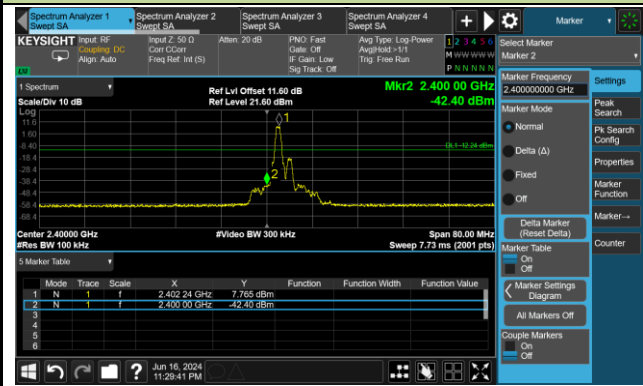


Spurious Emission 30MHz ~ 25GHz

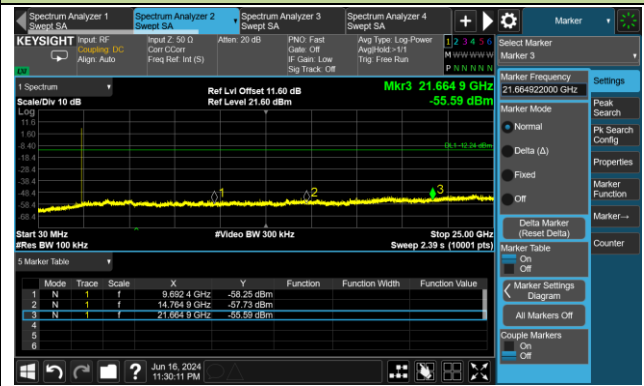

Ant 3 Port (Ant 6 2478MHz + Ant 3 2480MHz)

High Band Edge

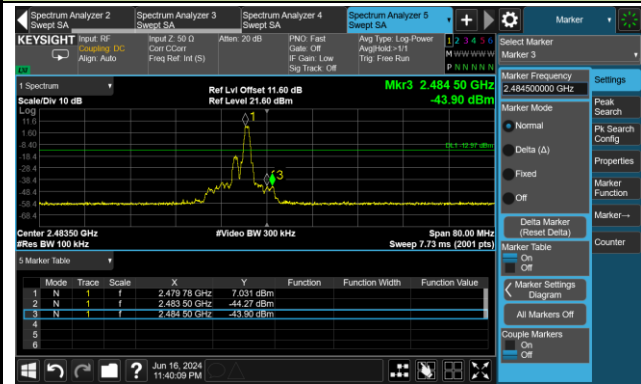


Spurious Emission 30MHz ~ 25GHz




Ant 3 Port (Ant 6 2480MHz + Ant 3 2478MHz)

High Band Edge

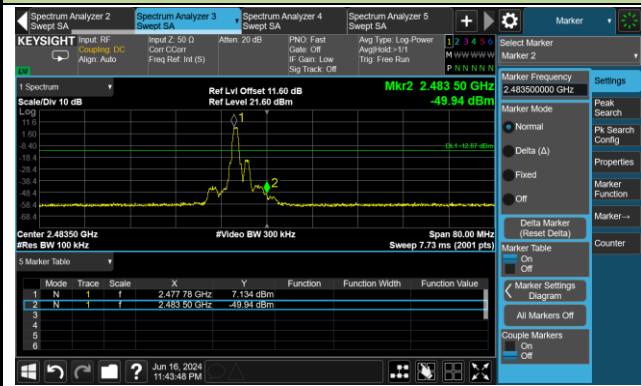

Spurious Emission 30MHz ~ 25GHz

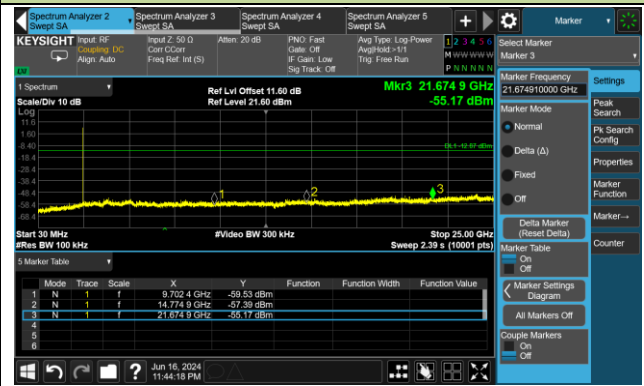

A.6 Radiated Spurious Emission Test Result

Mode 1

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	1#
Test Mode	BLE-1Mbps		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4901.5	35.2	3.2	38.4	74.0	-35.6	Peak	Horizontal
	8378.0	36.8	8.9	45.7	74.0	-28.3	Peak	Horizontal
	11438.0	35.5	13.7	49.2	74.0	-24.8	Peak	Horizontal
	4816.5	36.2	3.0	39.2	74.0	-34.8	Peak	Vertical
	7468.5	36.7	8.6	45.3	74.0	-28.7	Peak	Vertical
	11259.5	36.2	13.3	49.5	74.0	-24.5	Peak	Vertical
19	4842.0	36.8	3.1	39.9	74.0	-34.1	Peak	Horizontal
	8301.5	36.0	8.7	44.7	74.0	-29.3	Peak	Horizontal
	11795.0	36.4	12.2	48.6	74.0	-25.4	Peak	Horizontal
	4833.5	37.8	3.1	40.9	74.0	-33.1	Peak	Vertical
	8352.5	35.0	8.7	43.7	74.0	-30.3	Peak	Vertical
	11863.0	36.7	12.3	49.0	74.0	-25.0	Peak	Vertical
39	4893.0	36.0	3.2	39.2	74.0	-34.8	Peak	Horizontal
	8344.0	36.2	8.6	44.8	74.0	-29.2	Peak	Horizontal
	11514.5	35.9	13.6	49.5	74.0	-24.5	Peak	Horizontal
	4969.5	36.5	3.5	40.0	74.0	-34.0	Peak	Vertical
	8378.0	37.0	8.9	45.9	74.0	-28.1	Peak	Vertical
	10936.5	36.6	14.2	50.8	74.0	-23.2	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	1#
Test Mode	BLE-2Mbps		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4986.5	36.3	3.6	39.9	74.0	-34.1	Peak	Horizontal
	7494.0	36.9	8.6	45.5	74.0	-28.5	Peak	Horizontal
	11565.5	36.7	13.3	50.0	74.0	-24.0	Peak	Horizontal
	4986.5	35.3	3.6	38.9	74.0	-35.1	Peak	Vertical
	8318.5	35.3	8.7	44.0	74.0	-30.0	Peak	Vertical
	12033.0	36.8	12.5	49.3	74.0	-24.7	Peak	Vertical
19	4816.5	36.3	3.0	39.3	74.0	-34.7	Peak	Horizontal
	9015.5	37.8	10.4	48.2	74.0	-25.8	Peak	Horizontal
	11446.5	35.9	13.6	49.5	74.0	-24.5	Peak	Horizontal
	4961.0	35.9	3.4	39.3	74.0	-34.7	Peak	Vertical
	8420.5	36.7	9.0	45.7	74.0	-28.3	Peak	Vertical
	11829.0	36.7	12.2	48.9	74.0	-25.1	Peak	Vertical
39	4927.0	35.0	3.2	38.2	74.0	-35.8	Peak	Horizontal
	7545.0	36.5	8.6	45.1	74.0	-28.9	Peak	Horizontal
	11710.0	36.1	12.5	48.6	74.0	-25.4	Peak	Horizontal
	4706.0	35.9	2.8	38.7	74.0	-35.3	Peak	Vertical
	7536.5	35.7	8.5	44.2	74.0	-29.8	Peak	Vertical
	11574.0	36.0	13.2	49.2	74.0	-24.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	2#
Test Mode	BLE-1Mbps		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4901.5	35.4	3.2	38.6	74.0	-35.4	Peak	Horizontal
	8361.0	35.7	8.8	44.5	74.0	-29.5	Peak	Horizontal
	11684.5	37.0	12.8	49.8	74.0	-24.2	Peak	Horizontal
	4961.0	36.2	3.4	39.6	74.0	-34.4	Peak	Vertical
	8454.5	36.0	9.2	45.2	74.0	-28.8	Peak	Vertical
	11438.0	35.9	13.7	49.6	74.0	-24.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	2#
Test Mode	BLE-2Mbps		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4969.5	36.0	3.5	39.5	74.0	-34.5	Peak	Horizontal
	8208.0	36.3	8.9	45.2	74.0	-28.8	Peak	Horizontal
	11514.5	36.2	13.6	49.8	74.0	-24.2	Peak	Horizontal
	4876.0	36.2	3.1	39.3	74.0	-34.7	Peak	Vertical
	8386.5	34.7	8.8	43.5	74.0	-30.5	Peak	Vertical
	11506.0	36.3	13.6	49.9	74.0	-24.1	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	3#
Test Mode	BLE-1Mbps		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
39	4799.5	36.5	3.1	39.6	74.0	-34.4	Peak	Horizontal
	8318.5	35.3	8.7	44.0	74.0	-30.0	Peak	Horizontal
	11514.5	37.0	13.6	50.6	74.0	-23.4	Peak	Horizontal
	4808.0	36.2	3.0	39.2	74.0	-34.8	Peak	Vertical
	8199.5	35.7	8.9	44.6	74.0	-29.4	Peak	Vertical
	11353.0	34.0	13.2	47.2	74.0	-26.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	3#
Test Mode	BLE-2Mbps		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
39	5003.5	36.1	3.6	39.7	74.0	-34.3	Peak	Horizontal
	8165.5	35.7	9.2	44.9	74.0	-29.1	Peak	Horizontal
	11854.5	36.9	12.4	49.3	74.0	-24.7	Peak	Horizontal
	4927.0	37.0	3.2	40.2	74.0	-33.8	Peak	Vertical
	8386.5	35.6	8.8	44.4	74.0	-29.6	Peak	Vertical
	12109.5	36.9	12.4	49.3	74.0	-24.7	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Mode 2

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	4#
Test Mode	BLE-1Mbps		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	5054.5	37.4	3.7	41.1	74.0	-32.9	Peak	Horizontal
	7587.5	36.3	8.3	44.6	74.0	-29.4	Peak	Horizontal
	11897.0	38.1	12.2	50.3	74.0	-23.7	Peak	Horizontal
	4961.0	37.7	3.4	41.1	74.0	-32.9	Peak	Vertical
	7502.5	38.4	8.5	46.9	74.0	-27.1	Peak	Vertical
	11489.0	36.7	13.8	50.5	74.0	-23.5	Peak	Vertical
19	4672.0	36.9	2.5	39.4	74.0	-34.6	Peak	Horizontal
	7298.5	36.0	8.4	44.4	74.0	-29.6	Peak	Horizontal
	11548.5	36.3	13.5	49.8	74.0	-24.2	Peak	Horizontal
	3932.5	35.7	0.7	36.4	74.0	-37.6	Peak	Vertical
	7604.5	36.7	8.3	45.0	74.0	-29.0	Peak	Vertical
	11523.0	36.4	13.6	50.0	74.0	-24.0	Peak	Vertical
39	4629.5	37.5	2.7	40.2	74.0	-33.8	Peak	Horizontal
	7570.5	37.1	8.3	45.4	74.0	-28.6	Peak	Horizontal
	12041.5	37.3	12.5	49.8	74.0	-24.2	Peak	Horizontal
	4247.0	36.8	1.3	38.1	74.0	-35.9	Peak	Vertical
	7621.5	36.4	8.3	44.7	74.0	-29.3	Peak	Vertical
	11072.5	37.0	14.0	51.0	74.0	-23.0	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	4#
Test Mode	BLE-2Mbps		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4799.5	37.4	3.1	40.5	74.0	-33.5	Peak	Horizontal
	7536.5	36.3	8.5	44.8	74.0	-29.2	Peak	Horizontal
	11438.0	36.7	13.7	50.4	74.0	-23.6	Peak	Horizontal
	4748.5	37.2	2.8	40.0	74.0	-34.0	Peak	Vertical
	8344.0	35.3	8.6	43.9	74.0	-30.1	Peak	Vertical
	11778.0	37.8	12.4	50.2	74.0	-23.8	Peak	Vertical
19	4833.5	37.8	3.1	40.9	74.0	-33.1	Peak	Horizontal
	8165.5	36.0	9.2	45.2	74.0	-28.8	Peak	Horizontal
	11115.0	37.4	13.5	50.9	74.0	-23.1	Peak	Horizontal
	4816.5	36.1	3.0	39.1	74.0	-34.9	Peak	Vertical
	8242.0	36.5	8.8	45.3	74.0	-28.7	Peak	Vertical
	11684.5	35.7	12.8	48.5	74.0	-25.5	Peak	Vertical
39	4825.0	37.5	3.1	40.6	74.0	-33.4	Peak	Horizontal
	8352.5	35.8	8.7	44.5	74.0	-29.5	Peak	Horizontal
	11769.5	37.4	12.5	49.9	74.0	-24.1	Peak	Horizontal
	4850.5	37.1	3.0	40.1	74.0	-33.9	Peak	Vertical
	8310.0	36.0	8.7	44.7	74.0	-29.3	Peak	Vertical
	11591.0	36.7	13.2	49.9	74.0	-24.1	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	5#
Test Mode	BLE-1Mbps		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4901.5	35.4	3.2	38.6	74.0	-35.4	Peak	Horizontal
	8276.0	36.5	8.5	45.0	74.0	-29.0	Peak	Horizontal
	11531.5	37.1	13.5	50.6	74.0	-23.4	Peak	Horizontal
	4893.0	36.4	3.2	39.6	74.0	-34.4	Peak	Vertical
	8250.5	35.9	8.7	44.6	74.0	-29.4	Peak	Vertical
	11480.5	36.5	13.6	50.1	74.0	-23.9	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	5#
Test Mode	BLE-2Mbps		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4808.0	36.4	3.0	39.4	74.0	-34.6	Peak	Horizontal
	7604.5	35.5	8.3	43.8	74.0	-30.2	Peak	Horizontal
	11633.5	36.7	12.8	49.5	74.0	-24.5	Peak	Horizontal
	4850.5	34.8	3.0	37.8	74.0	-36.2	Peak	Vertical
	8301.5	34.5	8.7	43.2	74.0	-30.8	Peak	Vertical
	12126.5	36.0	12.6	48.6	74.0	-25.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	6#
Test Mode	BLE-1Mbps		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
39	4876.0	35.4	3.1	38.5	74.0	-35.5	Peak	Horizontal
	8242.0	35.4	8.8	44.2	74.0	-29.8	Peak	Horizontal
	12067.0	37.4	12.4	49.8	74.0	-24.2	Peak	Horizontal
	4876.0	36.3	3.1	39.4	74.0	-34.6	Peak	Vertical
	8327.0	35.6	8.7	44.3	74.0	-29.7	Peak	Vertical
	11531.5	34.7	13.5	48.2	74.0	-25.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	6#
Test Mode	BLE-2Mbps		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
39	4799.5	35.7	3.1	38.8	74.0	-35.2	Peak	Horizontal
	8361.0	36.7	8.8	45.5	74.0	-28.5	Peak	Horizontal
	11778.0	35.8	12.4	48.2	74.0	-25.8	Peak	Horizontal
	4791.0	35.9	3.2	39.1	74.0	-34.9	Peak	Vertical
	8361.0	35.4	8.8	44.2	74.0	-29.8	Peak	Vertical
	11531.5	36.6	13.5	50.1	74.0	-23.9	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Mode 3

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	7#
Test Mode	BLE-1Mbps		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4867.5	37.0	3.0	40.0	74.0	-34.0	Peak	Horizontal
	7443.0	37.8	8.6	46.4	74.0	-27.6	Peak	Horizontal
	11633.5	36.7	12.8	49.5	74.0	-24.5	Peak	Horizontal
	4876.0	36.2	3.1	39.3	74.0	-34.7	Peak	Vertical
	8437.5	37.1	8.9	46.0	74.0	-28.0	Peak	Vertical
	11540.0	35.8	13.5	49.3	74.0	-24.7	Peak	Vertical
19	4944.0	37.2	3.3	40.5	74.0	-33.5	Peak	Horizontal
	8369.5	37.6	8.9	46.4	74.0	-27.6	Peak	Horizontal
	11395.5	38.1	13.5	51.6	74.0	-22.4	Peak	Horizontal
	4731.5	36.7	3.0	39.6	74.0	-34.4	Peak	Vertical
	7477.0	36.7	8.6	45.3	74.0	-28.7	Peak	Vertical
	11497.5	37.1	13.7	50.8	74.0	-23.2	Peak	Vertical
39	4731.5	36.9	3.0	39.8	74.0	-34.2	Peak	Horizontal
	8301.5	36.4	8.7	45.2	74.0	-28.8	Peak	Horizontal
	11888.5	37.8	12.2	50.0	74.0	-24.0	Peak	Horizontal
	4952.5	37.0	3.3	40.3	74.0	-33.7	Peak	Vertical
	8361.0	37.6	8.8	46.4	74.0	-27.6	Peak	Vertical
	11140.5	35.8	13.7	49.5	74.0	-24.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	7#
Test Mode	BLE-2Mbps		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4859.0	35.5	2.9	38.4	74.0	-35.6	Peak	Horizontal
	8174.0	36.6	9.0	45.6	74.0	-28.4	Peak	Horizontal
	11030.0	36.8	14.0	50.8	74.0	-23.3	Peak	Horizontal
	4791.0	36.4	3.2	39.6	74.0	-34.4	Peak	Vertical
	7536.5	36.4	8.5	44.9	74.0	-29.1	Peak	Vertical
	11489.0	36.7	13.8	50.5	74.0	-23.5	Peak	Vertical
19	4145.0	37.4	1.2	38.6	74.0	-35.4	Peak	Horizontal
	7579.0	35.4	8.3	43.7	74.0	-30.3	Peak	Horizontal
	12152.0	36.4	12.5	48.9	74.0	-25.1	Peak	Horizontal
	4748.5	36.8	2.8	39.6	74.0	-34.4	Peak	Vertical
	8386.5	35.5	8.8	44.4	74.0	-29.6	Peak	Vertical
	12143.5	38.1	12.5	50.6	74.0	-23.4	Peak	Vertical
39	4298.0	37.0	1.7	38.7	74.0	-35.3	Peak	Horizontal
	7400.5	36.6	8.5	45.1	74.0	-28.9	Peak	Horizontal
	11557.0	36.8	13.4	50.2	74.0	-23.8	Peak	Horizontal
	4782.5	36.9	3.0	39.9	74.0	-34.1	Peak	Vertical
	7417.5	37.5	8.4	45.9	74.0	-28.1	Peak	Vertical
	12347.5	36.9	12.3	49.2	74.0	-24.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	8#
Test Mode	BLE-1Mbps		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4799.5	36.8	3.1	39.9	74.0	-34.1	Peak	Horizontal
	8259.0	36.5	8.7	45.2	74.0	-28.8	Peak	Horizontal
	12356.0	37.4	12.4	49.8	74.0	-24.2	Peak	Horizontal
	4859.0	35.3	2.9	38.3	74.0	-35.7	Peak	Vertical
	8276.0	35.6	8.5	44.1	74.0	-29.9	Peak	Vertical
	11489.0	36.4	13.8	50.2	74.0	-23.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	8#
Test Mode	BLE-2Mbps		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4791.0	36.4	3.2	39.5	74.0	-34.5	Peak	Horizontal
	8276.0	35.9	8.5	44.4	74.0	-29.6	Peak	Horizontal
	11565.5	36.4	13.3	49.6	74.0	-24.4	Peak	Horizontal
	5012.0	36.9	3.5	40.4	74.0	-33.6	Peak	Vertical
	7511.0	36.2	8.4	44.6	74.0	-29.4	Peak	Vertical
	11455.0	36.3	13.5	49.9	74.0	-24.1	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	9#
Test Mode	BLE-1Mbps		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
39	4944.0	35.5	3.3	38.8	74.0	-35.2	Peak	Horizontal
	8352.5	35.7	8.7	44.5	74.0	-29.5	Peak	Horizontal
	11684.5	37.3	12.8	50.1	74.0	-23.9	Peak	Horizontal
	4986.5	35.2	3.6	38.9	74.0	-35.1	Peak	Vertical
	8386.5	35.9	8.8	44.8	74.0	-29.2	Peak	Vertical
	11132.0	36.1	13.5	49.6	74.0	-24.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Carl Jiang
Test Date	2024-01-25	Filter	9#
Test Mode	BLE-2Mbps		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
39	4944.0	36.3	3.3	39.6	74.0	-34.4	Peak	Horizontal
	7434.5	35.0	8.5	43.5	74.0	-30.5	Peak	Horizontal
	11404.0	35.7	13.5	49.2	74.0	-24.8	Peak	Horizontal
	4944.0	36.3	3.3	39.6	74.0	-34.4	Peak	Vertical
	8463.0	36.3	9.3	45.6	74.0	-28.4	Peak	Vertical
	11489.0	36.0	13.8	49.8	74.0	-24.2	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Mode 4

Test Site	WZ-AC2	Test Engineer	Lucas Wang
Test Date	2024-05-19		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel		Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Ant 6	Ant 8								
00	01	4680.5	35.9	3.5	39.4	74.0	-34.6	Peak	Horizontal
		8403.5	33.2	10.8	44.0	74.0	-30.0	Peak	Horizontal
		11497.5	31.6	17.4	49.0	74.0	-25.0	Peak	Horizontal
		4918.5	33.9	3.6	37.5	74.0	-36.5	Peak	Vertical
		7477.0	32.5	11.4	43.9	74.0	-30.1	Peak	Vertical
		11599.5	31.8	16.9	48.7	74.0	-25.3	Peak	Vertical
19	20	4978.0	34.6	3.5	38.1	74.0	-35.9	Peak	Horizontal
		7451.5	32.0	11.5	43.5	74.0	-30.5	Peak	Horizontal
		11072.5	32.2	16.4	48.6	74.0	-25.4	Peak	Horizontal
		4944.0	35.4	3.5	38.9	74.0	-35.1	Peak	Vertical
		8089.0	32.0	11.2	43.2	74.0	-30.8	Peak	Vertical
		11497.5	31.5	17.4	48.9	74.0	-25.1	Peak	Vertical
38	39	4680.5	34.2	3.5	37.7	74.0	-36.3	Peak	Horizontal
		7647.0	34.3	10.9	45.2	74.0	-28.8	Peak	Horizontal
		11421.0	31.3	17.2	48.5	74.0	-25.5	Peak	Horizontal
		4663.5	35.2	3.3	38.5	74.0	-35.5	Peak	Vertical
		8131.5	31.1	11.2	42.3	74.0	-31.7	Peak	Vertical
		11480.5	31.6	17.4	49.0	74.0	-25.0	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Lucas Wang
Test Date	2024-05-19		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel		Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Ant 6	Ant 8								
01	00	4757.0	34.0	3.6	37.6	74.0	-36.4	Peak	Horizontal
		7392.0	31.8	11.2	43.0	74.0	-31.0	Peak	Horizontal
		11701.5	31.0	17.4	48.4	74.0	-25.6	Peak	Horizontal
		5029.0	34.5	3.9	38.4	74.0	-35.6	Peak	Vertical
		7655.5	32.5	10.8	43.3	74.0	-30.7	Peak	Vertical
		11701.5	30.9	17.4	48.3	74.0	-25.7	Peak	Vertical
20	19	4689.0	34.2	3.5	37.7	74.0	-36.3	Peak	Horizontal
		7400.5	32.6	11.2	43.8	74.0	-30.2	Peak	Horizontal
		12220.0	32.0	17.2	49.2	74.0	-24.8	Peak	Horizontal
		4672.0	34.9	3.4	38.3	74.0	-35.7	Peak	Vertical
		7324.0	32.4	10.9	43.3	74.0	-30.7	Peak	Vertical
		12211.5	32.1	17.3	49.4	74.0	-24.6	Peak	Vertical
39	38	4901.5	34.8	3.5	38.3	74.0	-35.7	Peak	Horizontal
		7536.5	31.9	11.4	43.3	74.0	-30.7	Peak	Horizontal
		11421.0	31.4	17.2	48.6	74.0	-25.4	Peak	Horizontal
		4944.0	34.7	3.5	38.2	74.0	-35.8	Peak	Vertical
		7494.0	32.8	11.2	44.0	74.0	-30.0	Peak	Vertical
		11098.0	31.6	16.7	48.3	74.0	-25.7	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Mode 5

Test Site	WZ-AC2	Test Engineer	Lucas Wang
Test Date	2024-05-19		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel		Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Ant 6	Ant 3								
00	01	4672.0	34.8	3.4	38.2	74.0	-35.8	Peak	Horizontal
		7485.5	31.7	11.3	43.0	74.0	-31.0	Peak	Horizontal
		11361.5	31.7	17.1	48.8	74.0	-25.2	Peak	Horizontal
		3966.5	36.8	0.4	37.2	74.0	-36.8	Peak	Vertical
		7400.5	31.8	11.2	43.0	74.0	-31.0	Peak	Vertical
		11531.5	31.1	17.3	48.4	74.0	-25.6	Peak	Vertical
19	20	4978.0	34.2	3.5	37.7	74.0	-36.3	Peak	Horizontal
		8480.0	32.5	11.4	43.9	74.0	-30.1	Peak	Horizontal
		11387.0	31.5	17.2	48.7	74.0	-25.3	Peak	Horizontal
		4689.0	34.7	3.5	38.2	74.0	-35.8	Peak	Vertical
		7426.0	32.3	11.3	43.6	74.0	-30.4	Peak	Vertical
		11344.5	30.9	17.2	48.1	74.0	-25.9	Peak	Vertical
38	39	4689.0	34.1	3.5	37.6	74.0	-36.4	Peak	Horizontal
		8497.0	32.8	11.5	44.3	74.0	-29.7	Peak	Horizontal
		11446.5	31.4	17.1	48.5	74.0	-25.5	Peak	Horizontal
		4842.0	34.1	3.6	37.7	74.0	-36.3	Peak	Vertical
		7417.5	32.0	11.3	43.3	74.0	-30.7	Peak	Vertical
		12194.5	31.4	17.3	48.7	74.0	-25.3	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Lucas Wang
Test Date	2024-05-19		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel		Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Ant 6	Ant 3								
01	00	4969.5	34.4	3.5	37.9	74.0	-36.1	Peak	Horizontal
		8437.5	32.0	11.2	43.2	74.0	-30.8	Peak	Horizontal
		12160.5	31.8	16.9	48.7	74.0	-25.3	Peak	Horizontal
		5020.5	34.1	3.9	38.0	74.0	-36.0	Peak	Vertical
		7383.5	32.4	11.2	43.6	74.0	-30.4	Peak	Vertical
		11327.5	31.1	17.3	48.4	74.0	-25.6	Peak	Vertical
20	19	3966.5	37.0	0.4	37.4	74.0	-36.6	Peak	Horizontal
		8454.5	32.5	11.3	43.8	74.0	-30.2	Peak	Horizontal
		11463.5	31.1	17.3	48.4	74.0	-25.6	Peak	Horizontal
		4765.5	34.5	3.6	38.1	74.0	-35.9	Peak	Vertical
		7383.5	31.6	11.2	42.8	74.0	-31.2	Peak	Vertical
		11693.0	31.2	17.3	48.5	74.0	-25.5	Peak	Vertical
39	38	4816.5	34.3	3.7	38.0	74.0	-36.0	Peak	Horizontal
		7468.5	31.8	11.5	43.3	74.0	-30.7	Peak	Horizontal
		11659.0	30.6	17.6	48.2	74.0	-25.8	Peak	Horizontal
		3958.0	36.8	0.4	37.2	74.0	-36.8	Peak	Vertical
		4689.0	34.0	3.5	37.5	74.0	-36.5	Peak	Vertical
		11497.5	30.9	17.4	48.3	74.0	-25.7	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission 9kHz ~ 30MHz:

Site: WZ-AC2	Test Date: 2024-03-10
Limit: FCC_Part15.209_RSE	Engineer: Bob Zhang
Probe: FMZB1519_0.009-30MHz	Polarity: Coaxial
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1Mbps at 2402MHz	

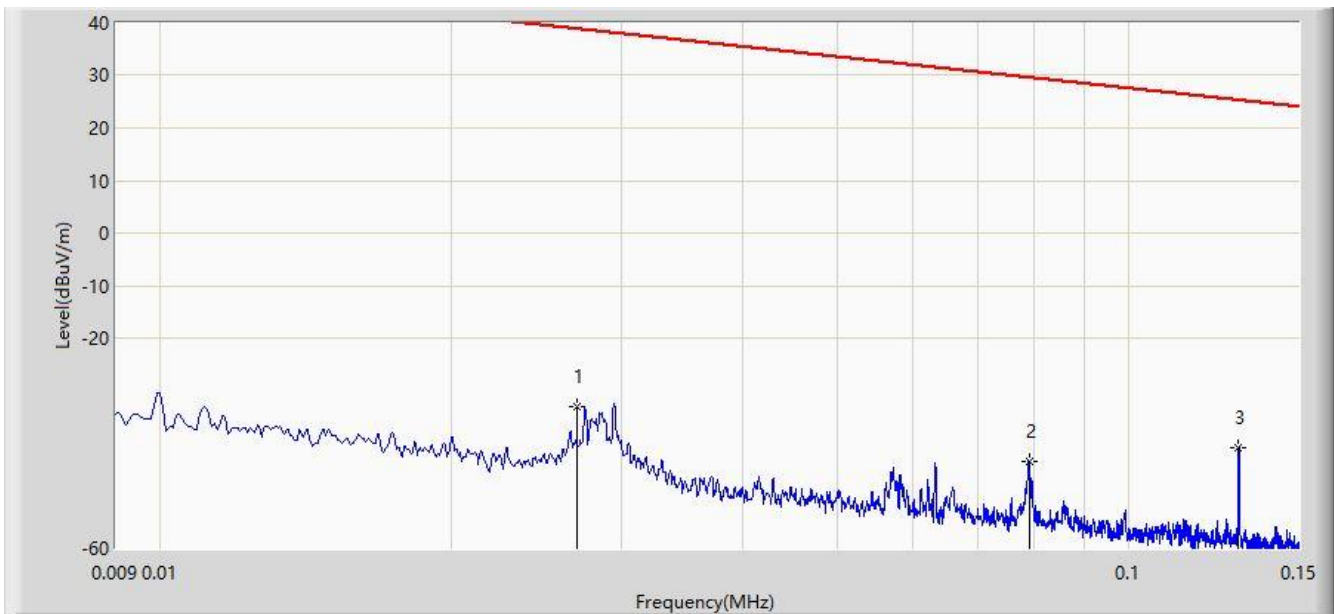

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		0.027	-32.928	27.876	-71.891	38.963	-60.804	PK
2		0.079	-43.412	18.663	-73.055	29.643	-62.076	PK
3	*	0.130	-40.901	21.246	-66.219	25.319	-62.147	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC2	Test Date: 2024-03-10
Limit: FCC_Part15.209_RSE	Engineer: Bob Zhang
Probe: FMZB1519_0.009-30MHz	Polarity: Coplanar
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1Mbps at 2402MHz	

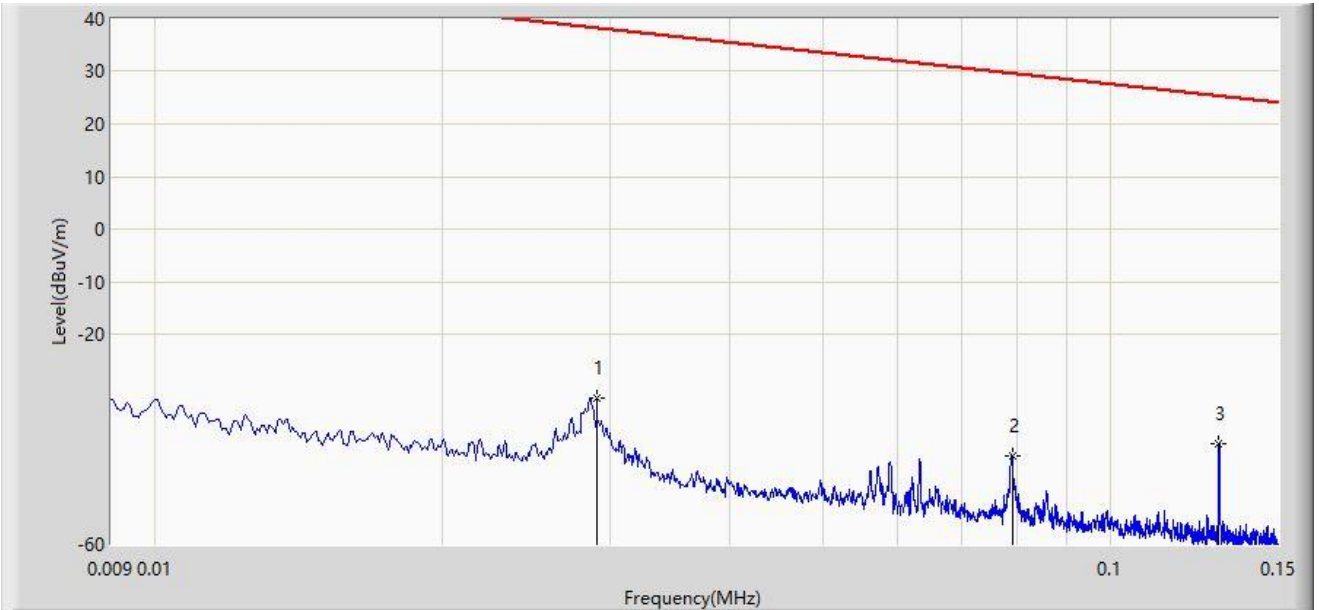

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		0.029	-32.224	28.760	-70.566	38.342	-60.984	PK
2		0.079	-43.294	18.781	-72.937	29.643	-62.076	PK
3	*	0.130	-40.734	21.413	-66.052	25.319	-62.147	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC2	Test Date: 2024-03-10
Limit: FCC_Part15.209_RSE	Engineer: Bob Zhang
Probe: FMZB1519_0.009-30MHz	Polarity: Coaxial
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1Mbps at 2402MHz	

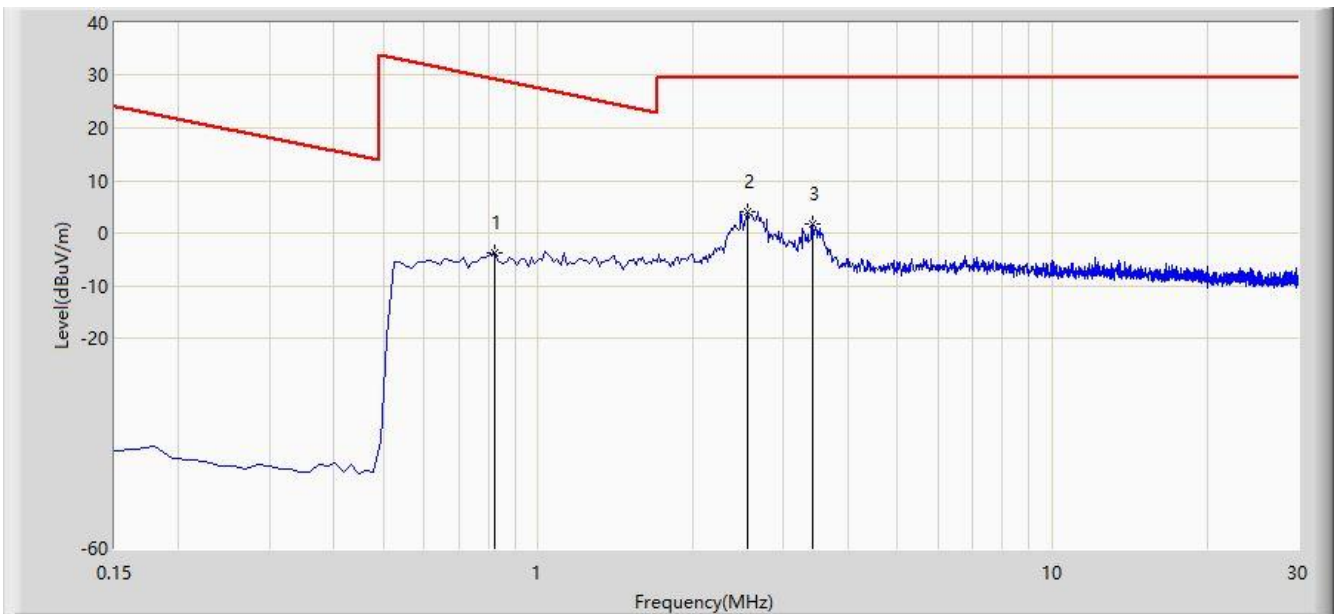

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		0.822	-3.887	17.908	-33.206	29.319	-21.795	PK
2	*	2.553	3.973	25.781	-25.527	29.500	-21.808	PK
3		3.419	1.688	23.457	-27.812	29.500	-21.769	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC2	Test Date: 2024-03-10
Limit: FCC_Part15.209_RSE	Engineer: Bob Zhang
Probe: FMZB1519_0.009-30MHz	Polarity: Coplanar
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1Mbps at 2402MHz	

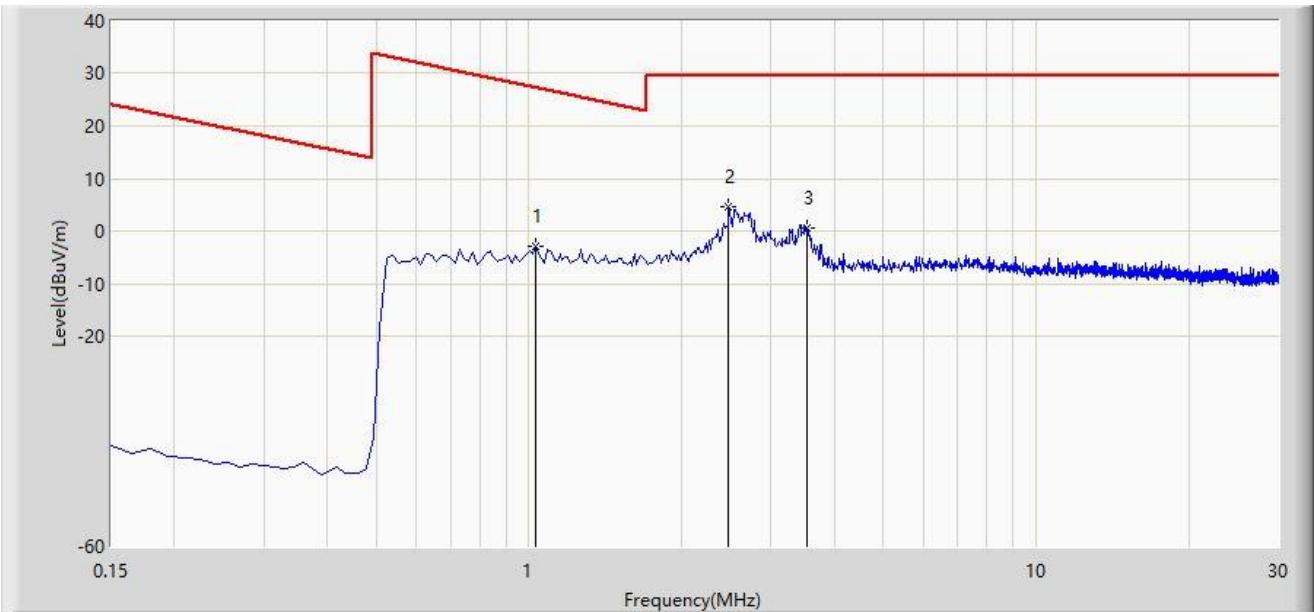

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		1.031	-2.854	18.930	-30.211	27.357	-21.784	PK
2	*	2.478	4.778	26.590	-24.722	29.500	-21.812	PK
3		3.538	0.436	22.202	-29.064	29.500	-21.765	PK

Note 1: " * ", means this data is the worst emission level.


Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

The Result of Radiated Emission below 1GHz:

Site: WZ-AC2	Test Date: 2024-03-15
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bob Zhang
Probe: VULB9162_30-7000MHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1Mbps at 2402MHz	

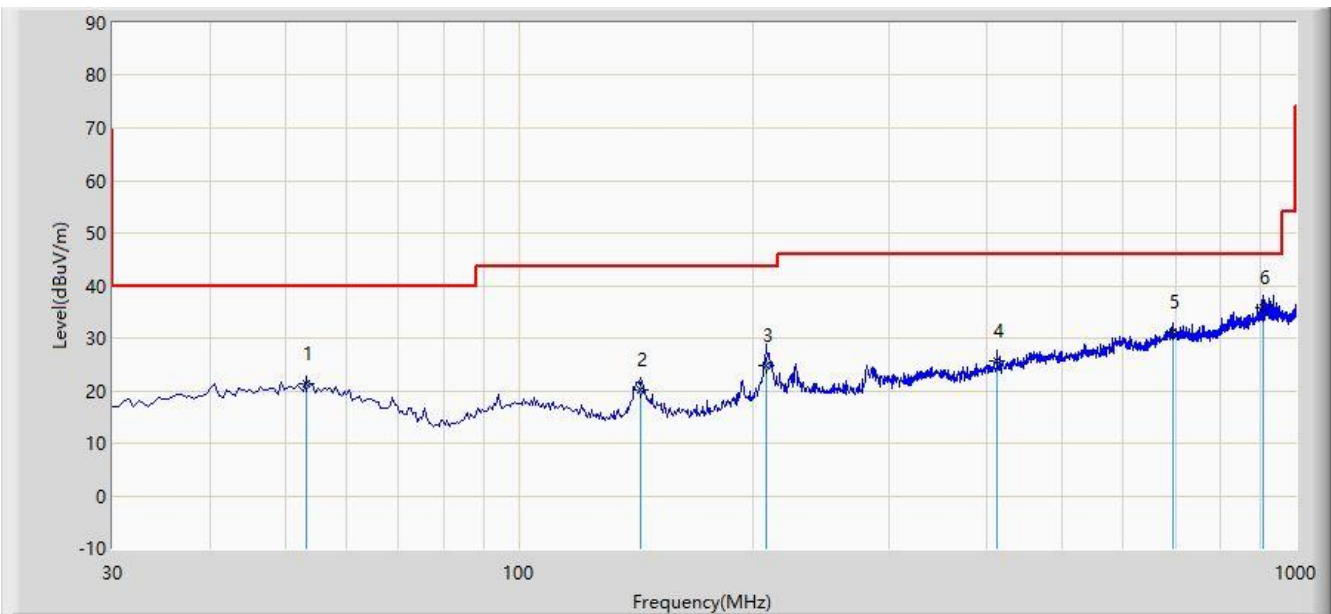


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		53.280	21.412	1.100	-18.588	40.000	20.312	QP
2		143.490	20.215	5.200	-23.285	43.500	15.015	QP
3		207.995	24.917	6.600	-18.583	43.500	18.317	QP
4		412.180	25.689	1.900	-20.311	46.000	23.789	QP
5		694.390	31.287	2.630	-14.713	46.000	28.657	QP
6	*	906.395	35.682	4.800	-10.318	46.000	30.882	QP

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-03-15
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bob Zhang
Probe: VULB9162_30-7000MHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1Mbps at 2402MHz	

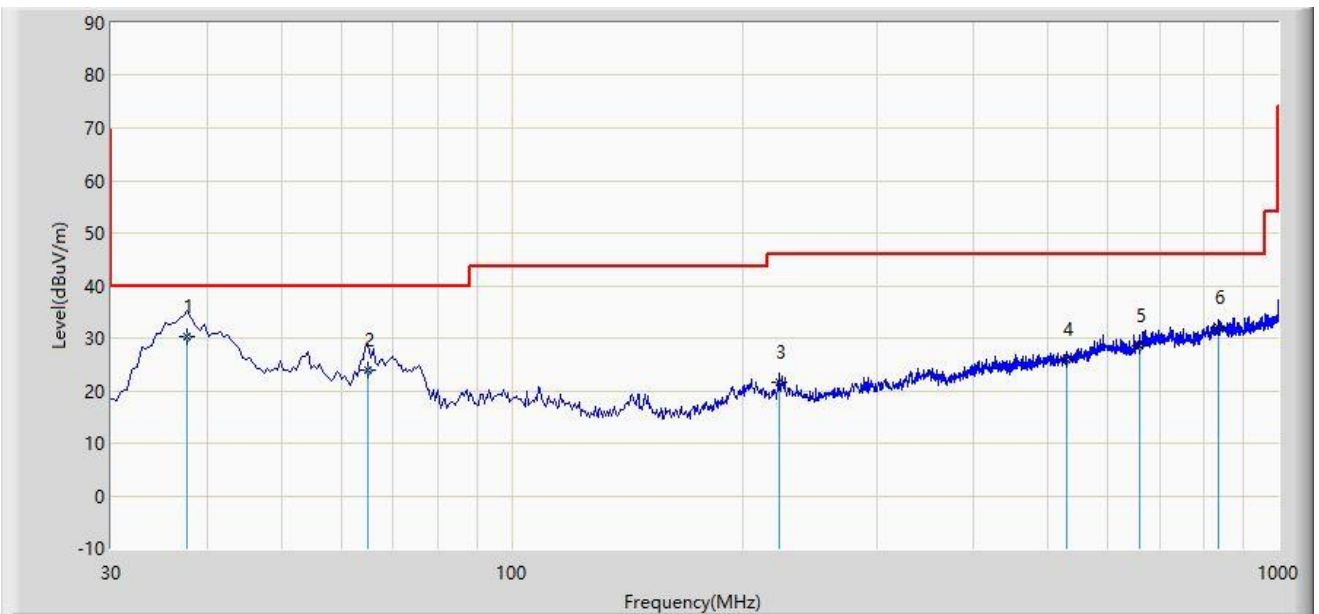

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	37.760	30.393	12.100	-9.607	40.000	18.293	QP
2		64.920	23.919	5.900	-16.081	40.000	18.019	QP
3		223.030	21.588	2.600	-24.412	46.000	18.988	QP
4		528.580	26.000	0.500	-20.000	46.000	25.500	QP
5		660.015	28.459	0.800	-17.541	46.000	27.658	QP
6		837.040	32.056	1.100	-13.944	46.000	30.956	QP


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

The Result of Radiated Emission 18 ~ 25GHz:

Site: WZ-AC2	Test Date: 2024-03-16
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bob Zhang
Probe: BBHA9170_549_18-40GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1Mbps at 2402MHz	

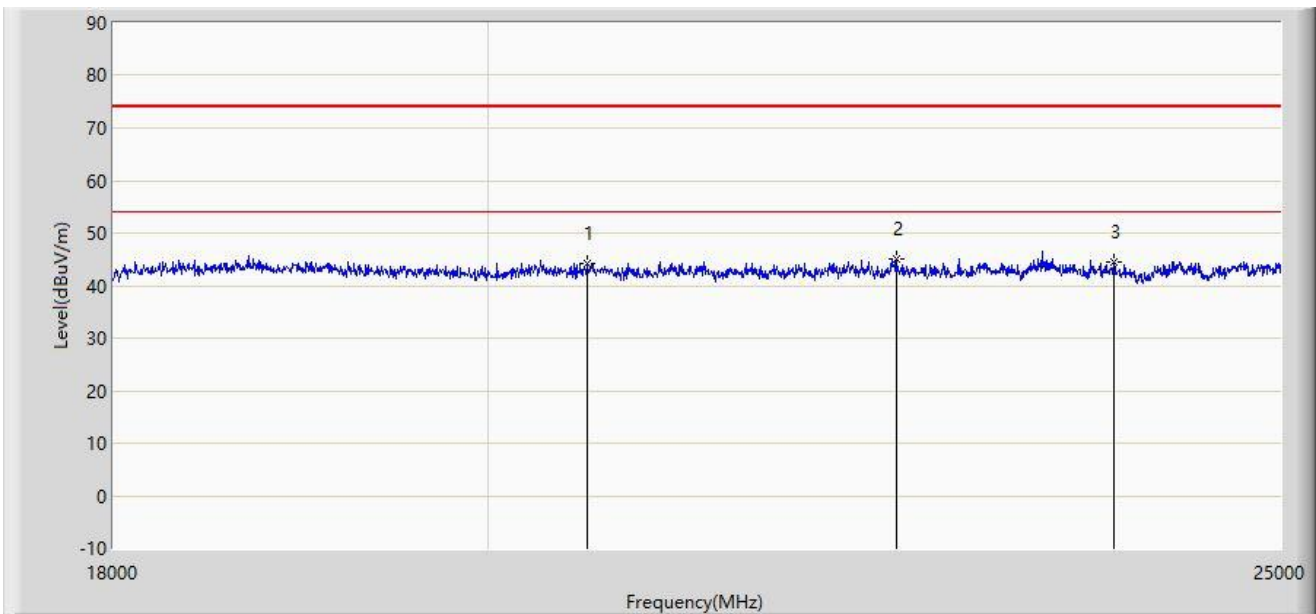

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		20568.000	44.259	53.478	-29.741	74.000	-9.220	PK
2	*	22444.000	45.029	52.897	-28.971	74.000	-7.868	PK
3		23852.000	44.372	51.349	-29.628	74.000	-6.977	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

Site: WZ-AC2	Test Date: 2024-03-16
Limit: FCC_Part15.209_RSE(3m)	Engineer: Bob Zhang
Probe: BBHA9170_549_18-40GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1Mbps at 2402MHz	

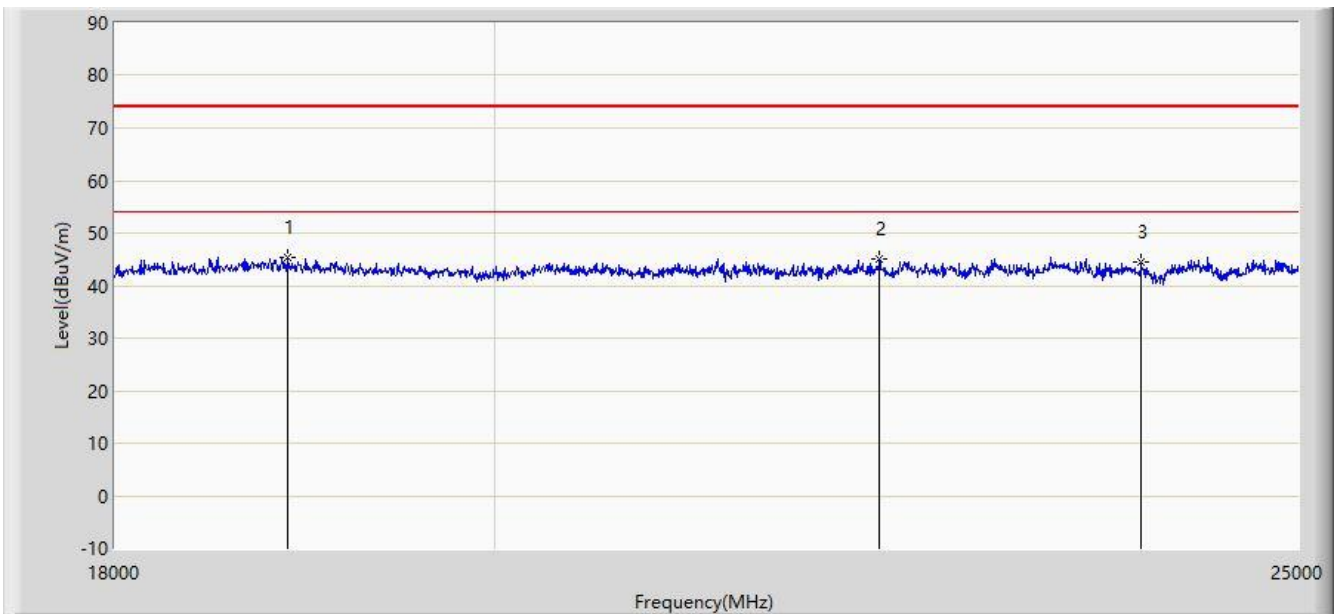

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	18884.000	45.440	56.008	-28.560	74.000	-10.567	PK
2		22260.000	44.998	52.616	-29.002	74.000	-7.618	PK
3		23936.000	44.515	52.185	-29.485	74.000	-7.670	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

A.7 Radiated Restricted Band Edge Test Result

Mode 1 – Filter 1#

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz	

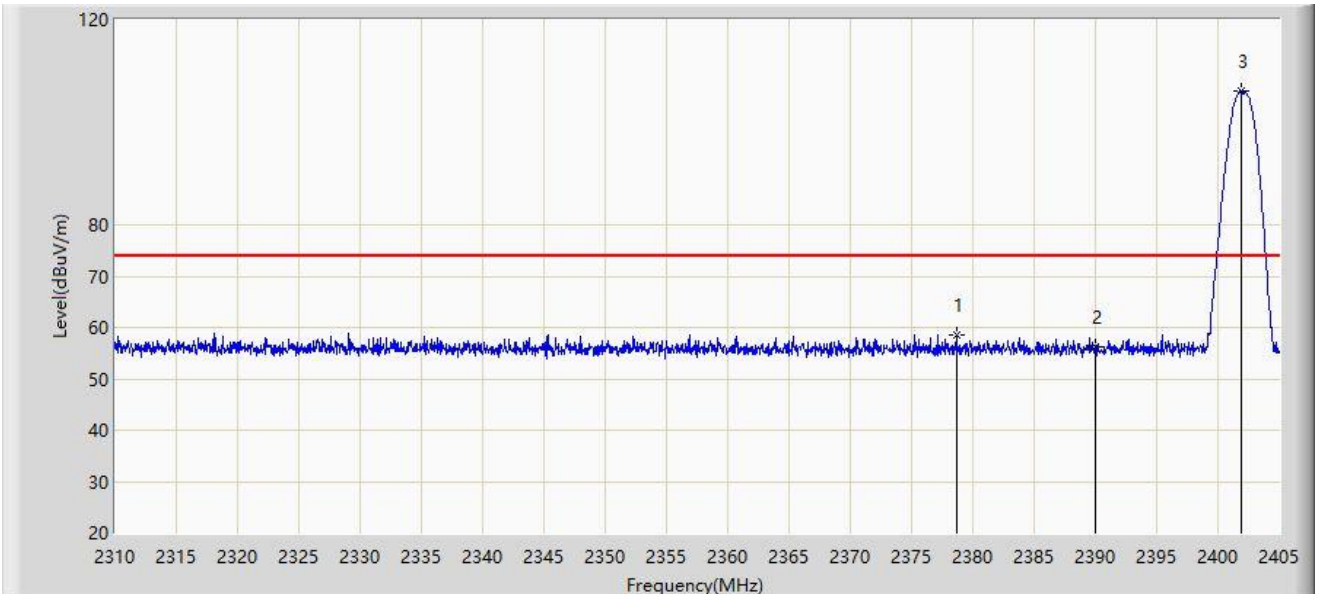


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2378.685	58.686	27.406	-15.314	74.000	31.280	PK
2		2390.000	56.134	24.880	-17.866	74.000	31.254	PK
3		2401.865	106.100	74.842	N/A	N/A	31.258	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz	

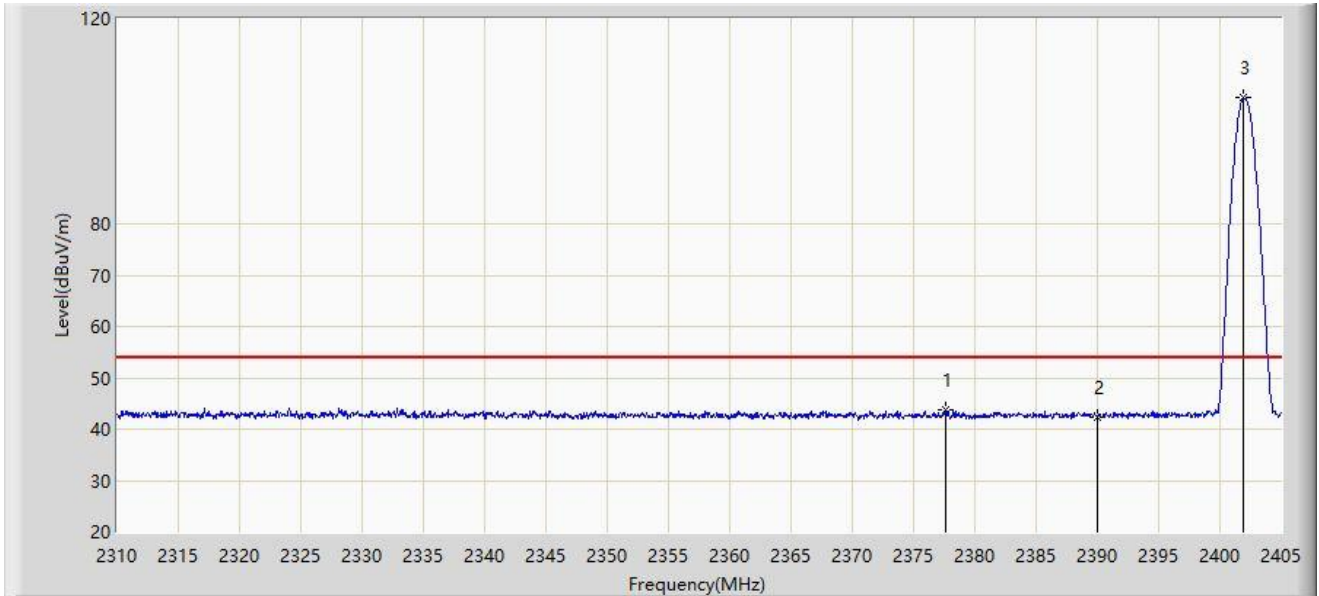


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2377.593	43.632	12.348	-10.368	54.000	31.284	AV
2		2390.000	42.398	11.144	-11.602	54.000	31.254	AV
3		2401.960	104.729	73.471	N/A	N/A	31.258	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz	

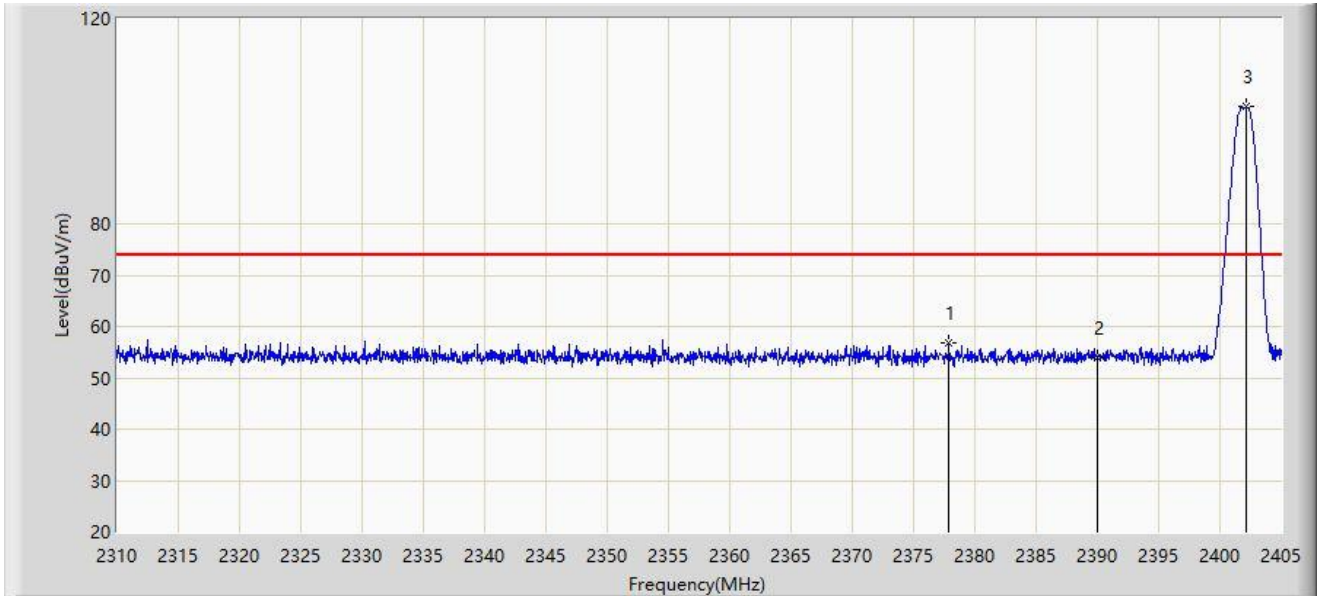


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2377.877	56.867	25.584	-17.133	74.000	31.283	PK
2		2390.000	54.032	22.778	-19.968	74.000	31.254	PK
3		2402.198	102.771	71.513	N/A	N/A	31.258	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz	

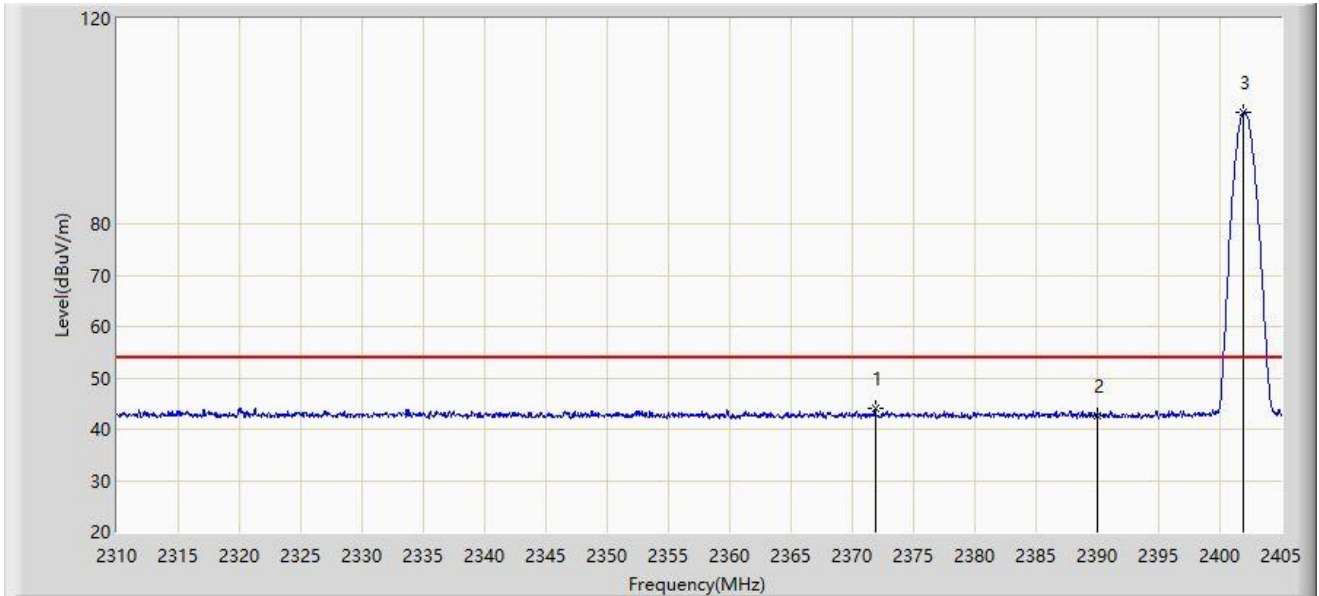


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2371.893	43.921	12.617	-10.079	54.000	31.303	AV
2		2390.000	42.682	11.428	-11.318	54.000	31.254	AV
3		2401.913	101.658	70.400	N/A	N/A	31.258	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2480MHz	

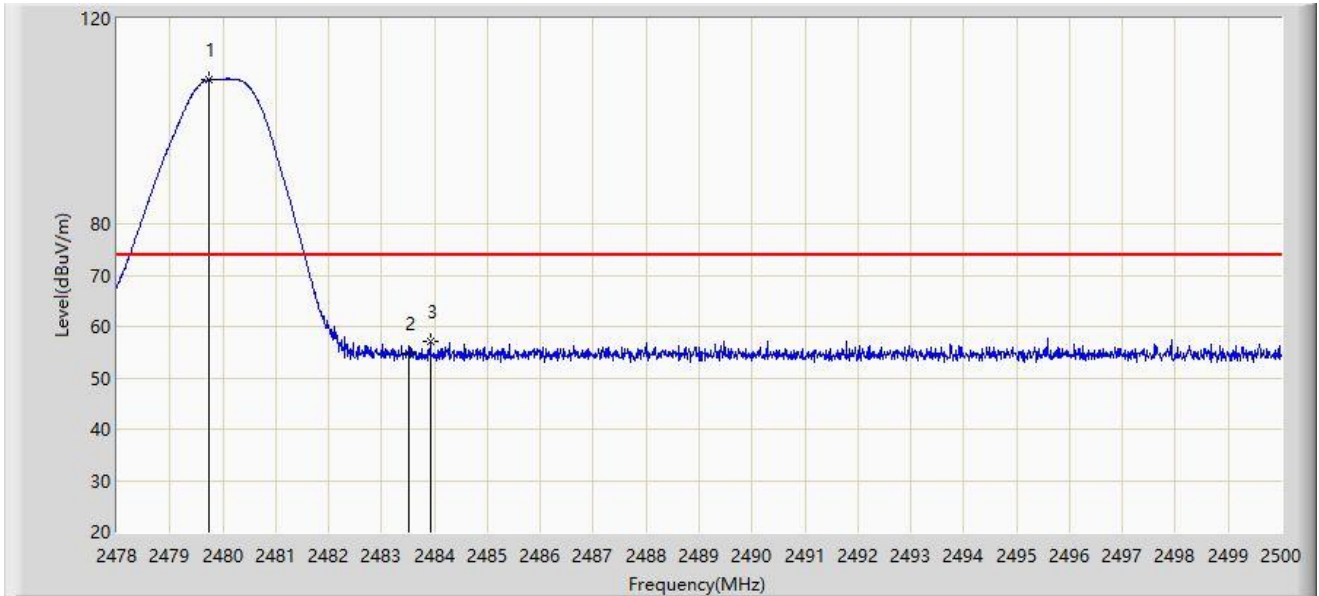


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.738	108.057	76.834	N/A	N/A	31.223	PK
2		2483.500	54.840	23.614	-19.160	74.000	31.226	PK
3	*	2483.918	57.079	25.852	-16.921	74.000	31.227	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2480MHz	

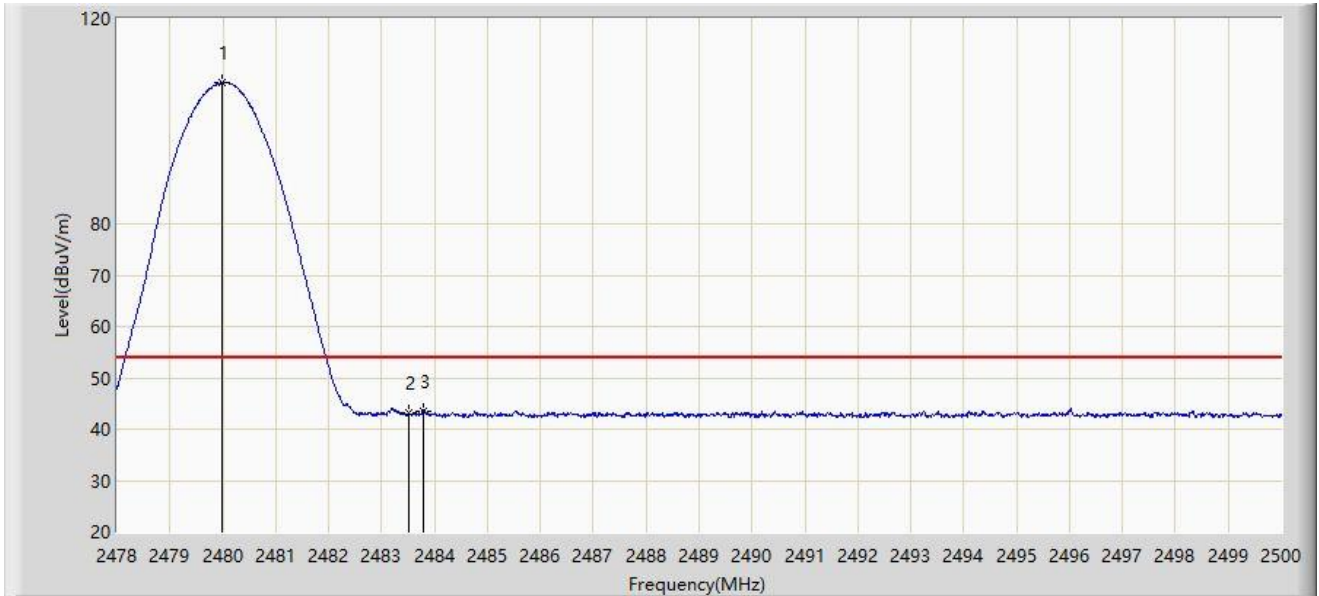


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.980	107.451	76.227	N/A	N/A	31.224	AV
2		2483.500	43.286	12.060	-10.714	54.000	31.226	AV
3	*	2483.797	43.577	12.351	-10.423	54.000	31.226	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2480MHz	

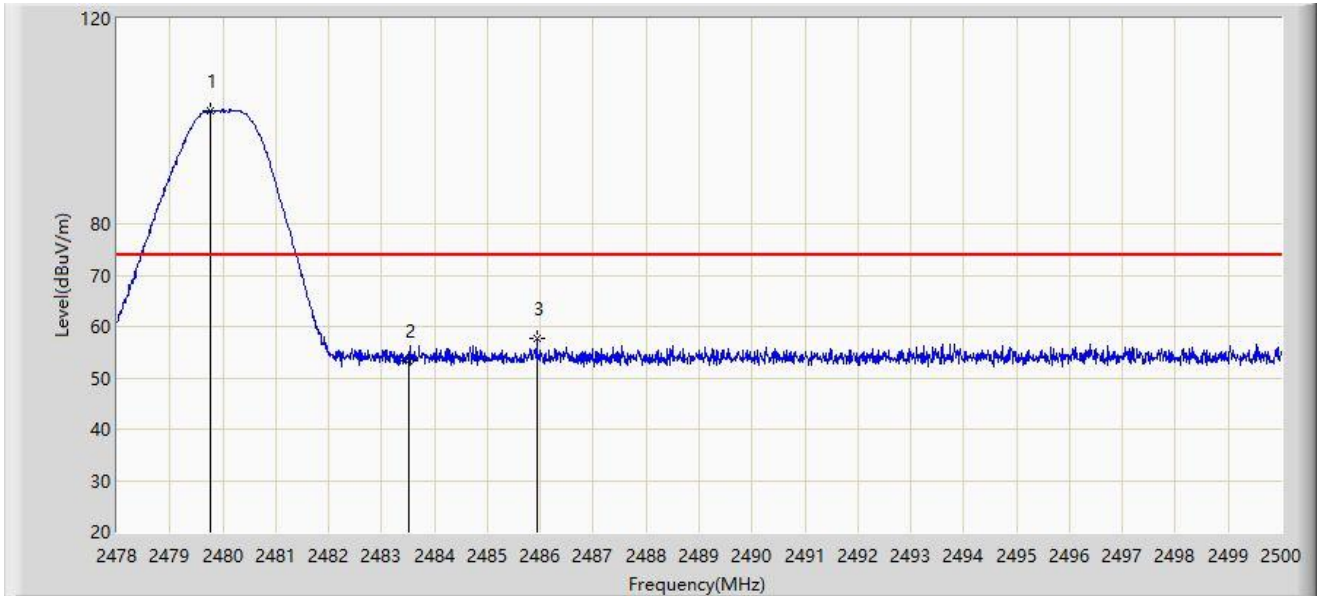


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		2479.760	102.159	70.936	N/A	N/A	31.223	PK
2		2483.500	53.227	22.001	-20.773	74.000	31.226	PK
3	*	2485.931	57.538	26.310	-16.462	74.000	31.228	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2480MHz	

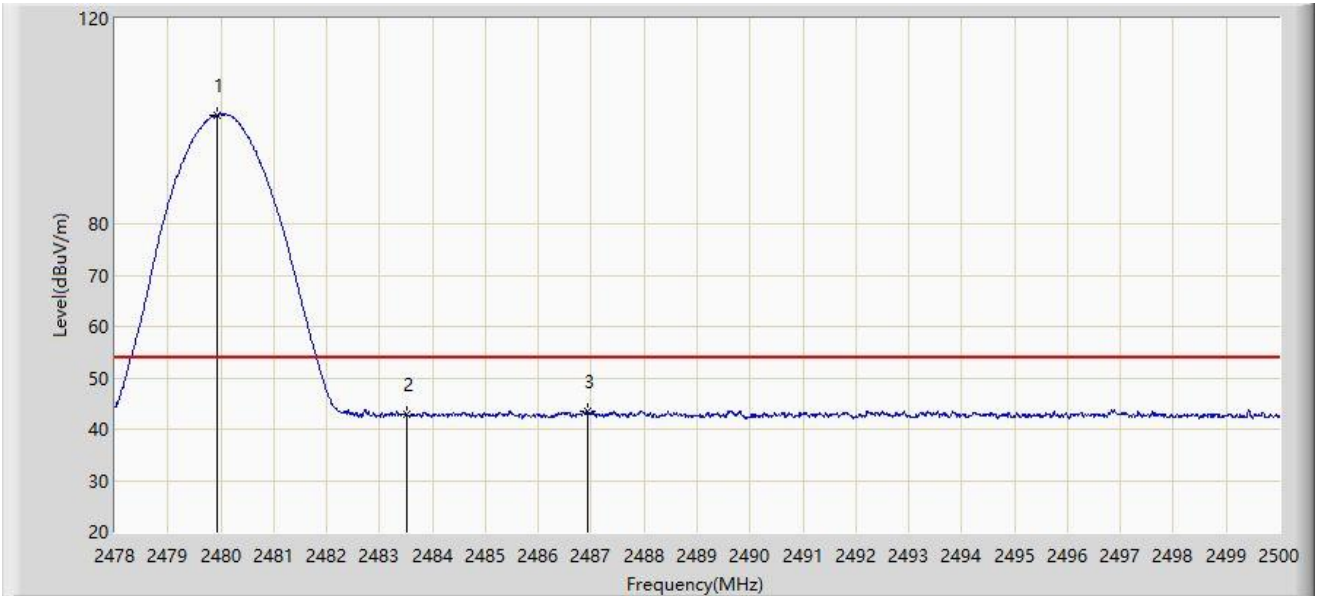


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.925	101.213	69.989	N/A	N/A	31.224	AV
2		2483.500	42.848	11.622	-11.152	54.000	31.226	AV
3	*	2486.943	43.590	12.361	-10.410	54.000	31.229	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2402MHz	

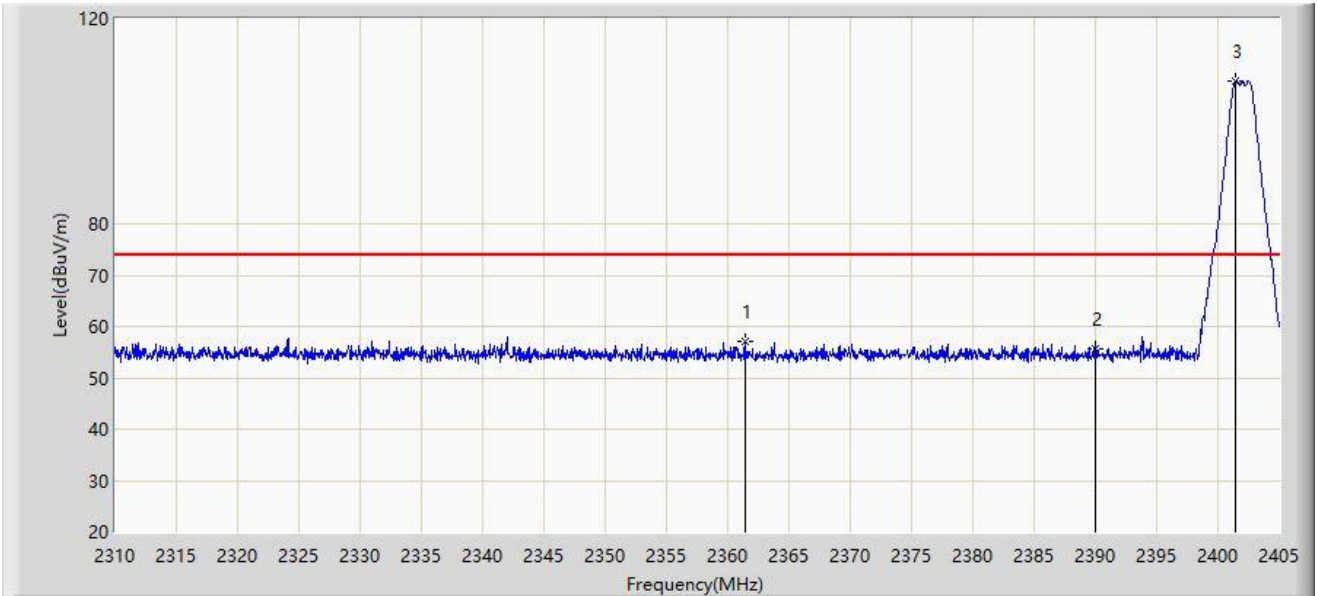


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2361.395	57.001	25.669	-16.999	74.000	31.331	PK
2		2390.000	55.784	24.530	-18.216	74.000	31.254	PK
3		2401.485	107.790	76.532	N/A	N/A	31.258	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2402MHz	

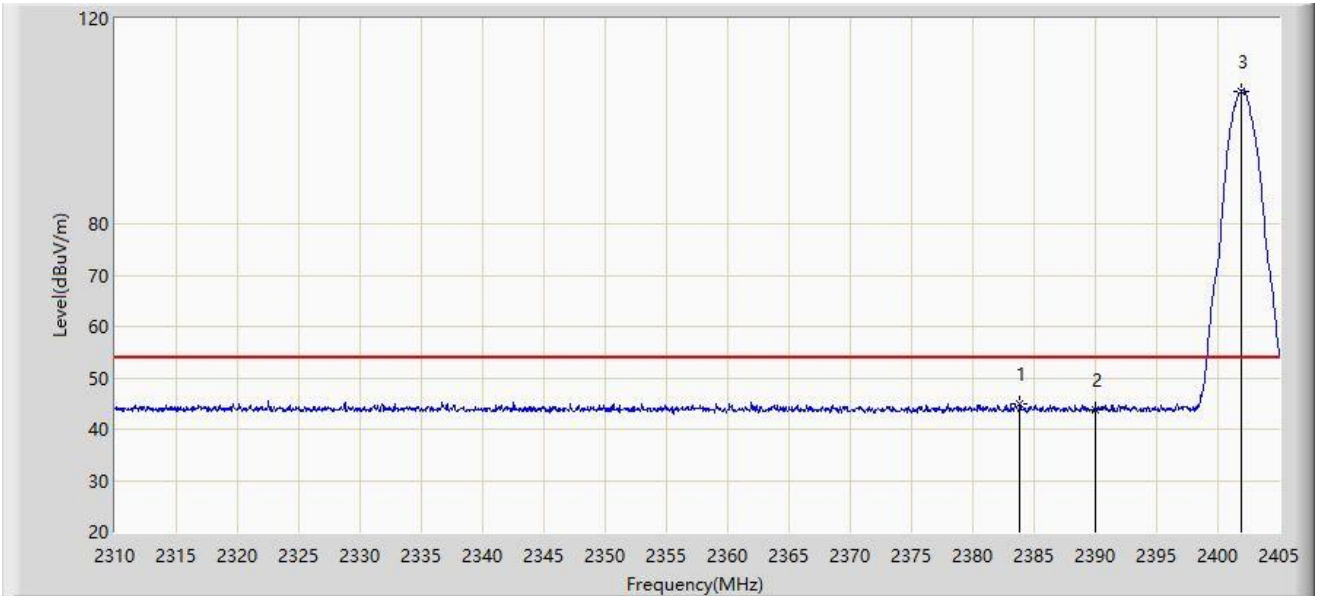


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2383.815	45.031	13.771	-8.969	54.000	31.259	AV
2		2390.000	43.735	12.481	-10.265	54.000	31.254	AV
3		2401.913	105.882	74.624	N/A	N/A	31.258	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2402MHz	

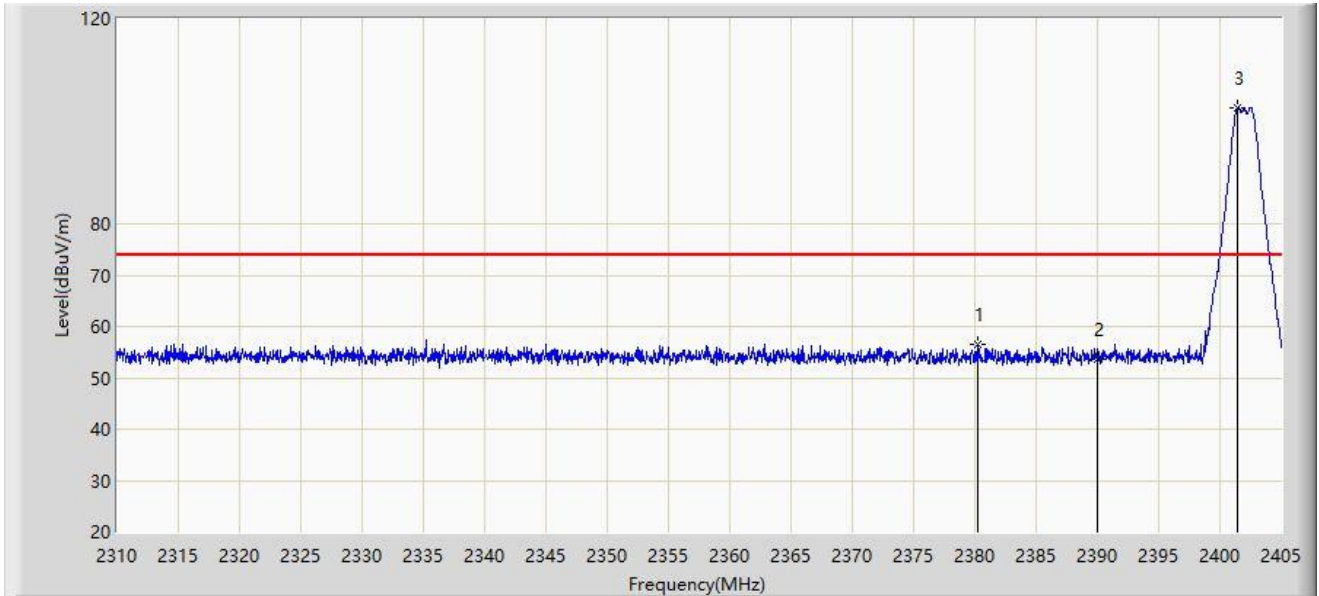


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2380.205	56.475	25.201	-17.525	74.000	31.274	PK
2		2390.000	53.643	22.389	-20.357	74.000	31.254	PK
3		2401.485	102.470	71.212	N/A	N/A	31.258	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2402MHz	

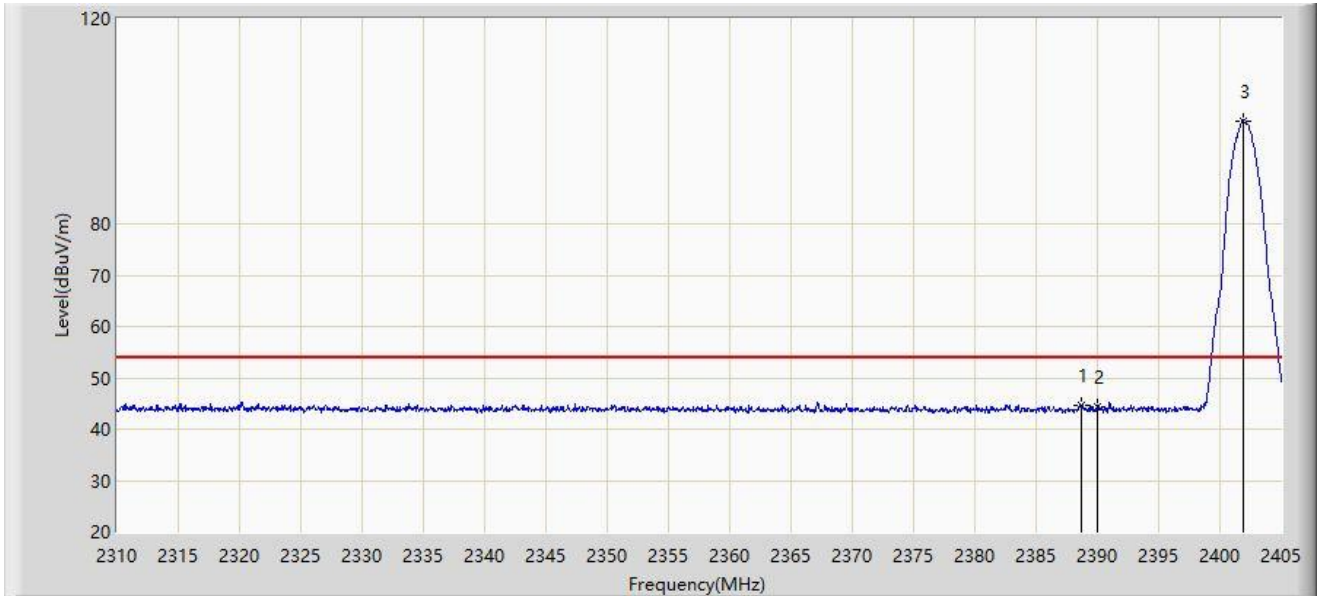


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2388.708	44.607	13.352	-9.393	54.000	31.255	AV
2		2390.000	44.400	13.146	-9.600	54.000	31.254	AV
3		2401.865	100.034	68.776	N/A	N/A	31.258	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2480MHz	

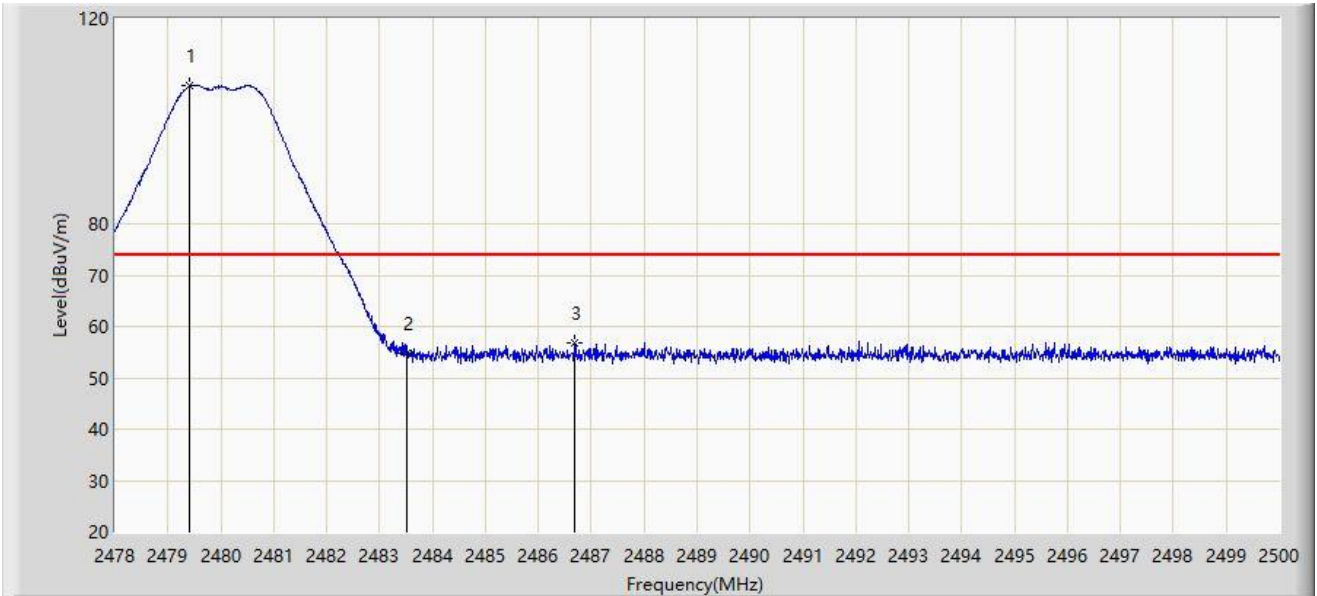


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.419	106.822	75.599	N/A	N/A	31.223	PK
2		2483.500	54.660	23.434	-19.340	74.000	31.226	PK
3	*	2486.690	56.881	25.652	-17.119	74.000	31.229	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2480MHz	

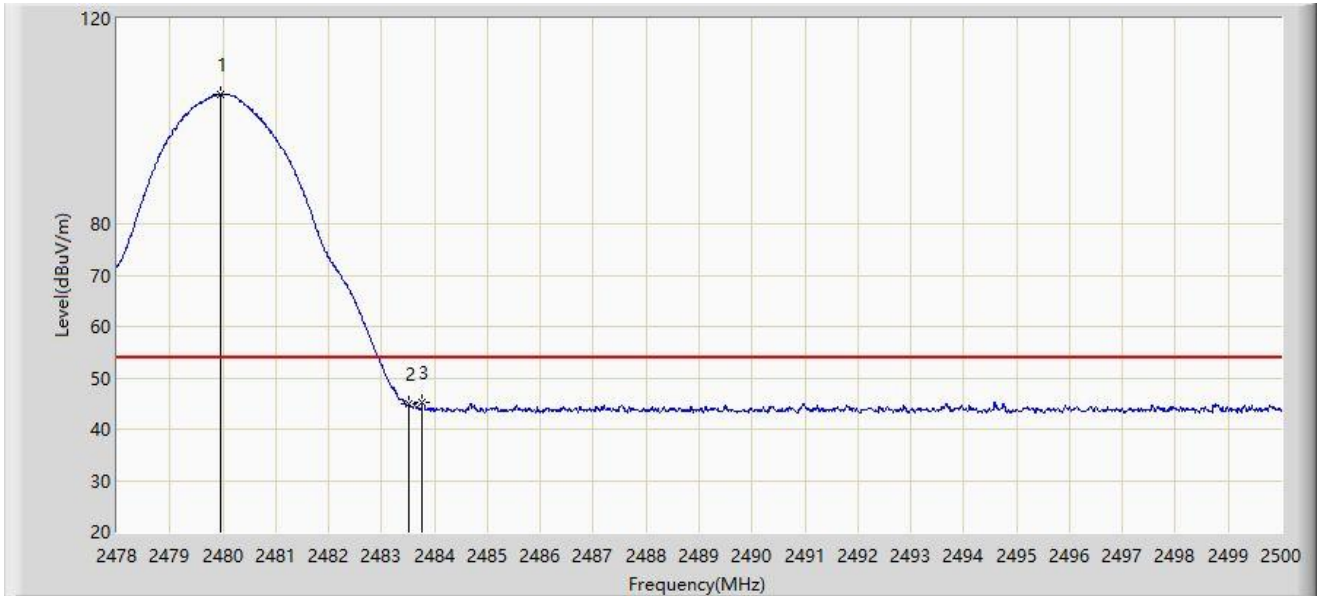


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.947	105.260	74.036	N/A	N/A	31.224	AV
2		2483.500	44.786	13.560	-9.214	54.000	31.226	AV
3	*	2483.775	45.141	13.915	-8.859	54.000	31.226	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2480MHz	

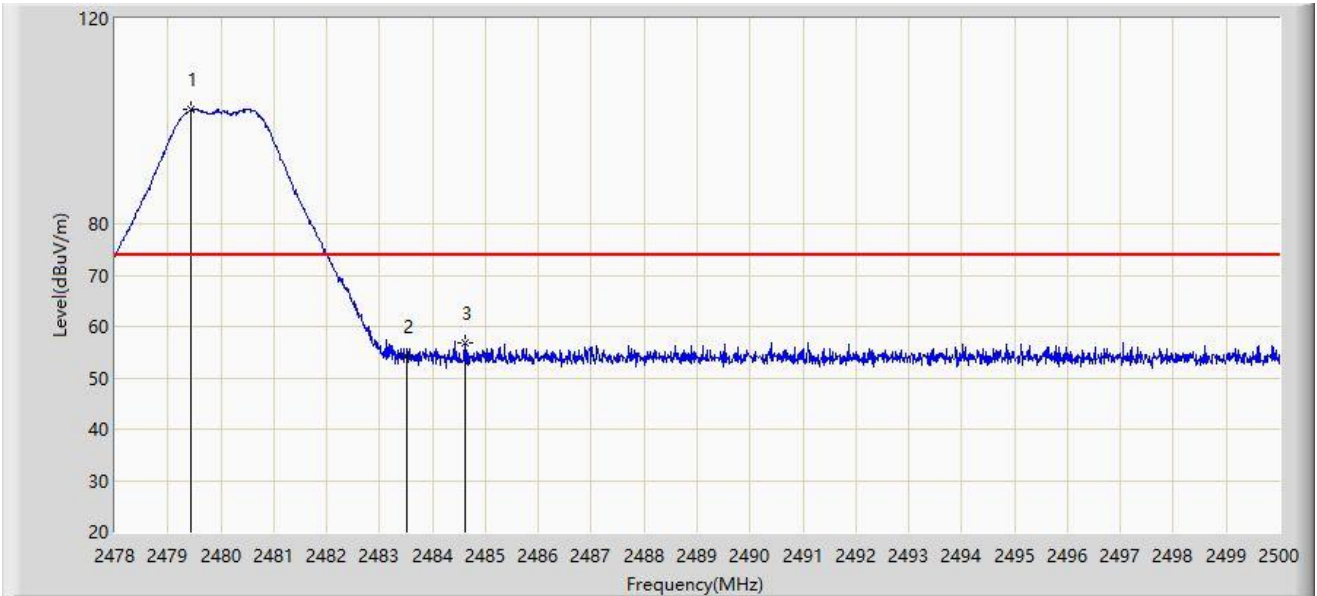


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		2479.430	102.194	70.971	N/A	N/A	31.223	PK
2		2483.500	54.286	23.060	-19.714	74.000	31.226	PK
3	*	2484.611	56.921	25.694	-17.079	74.000	31.227	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2480MHz	

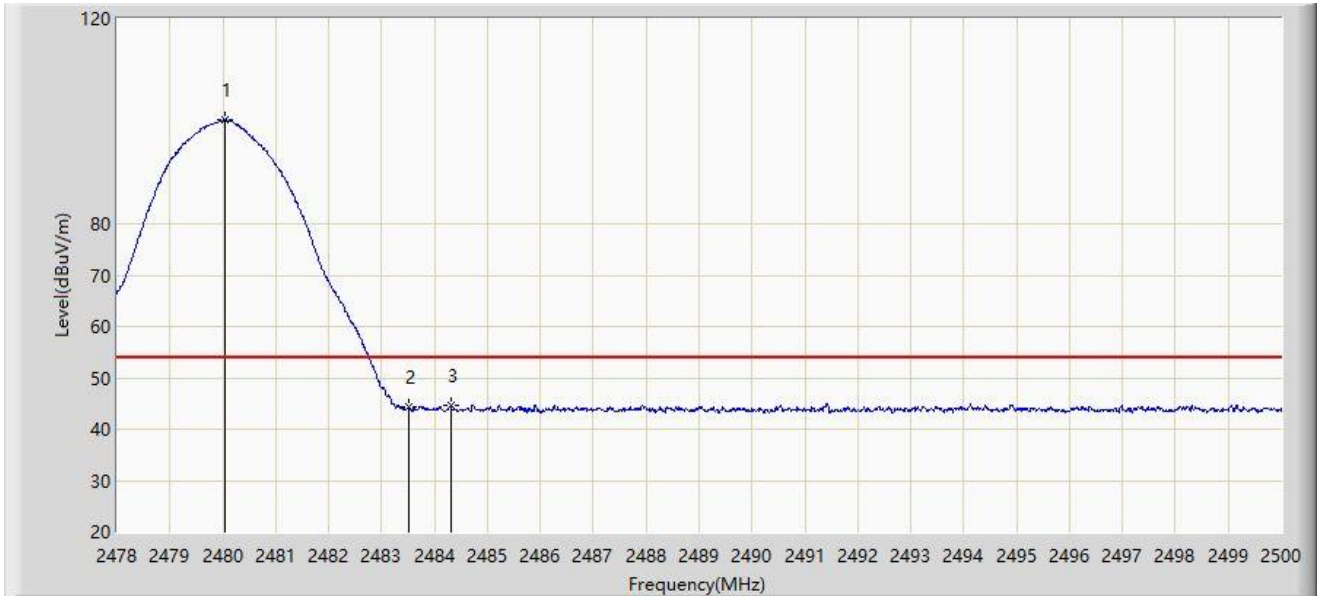

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.046	100.288	69.064	N/A	N/A	31.224	AV
2		2483.500	44.398	13.172	-9.602	54.000	31.226	AV
3	*	2484.303	44.708	13.481	-9.292	54.000	31.227	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Mode 1 – Filter 2#

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz	

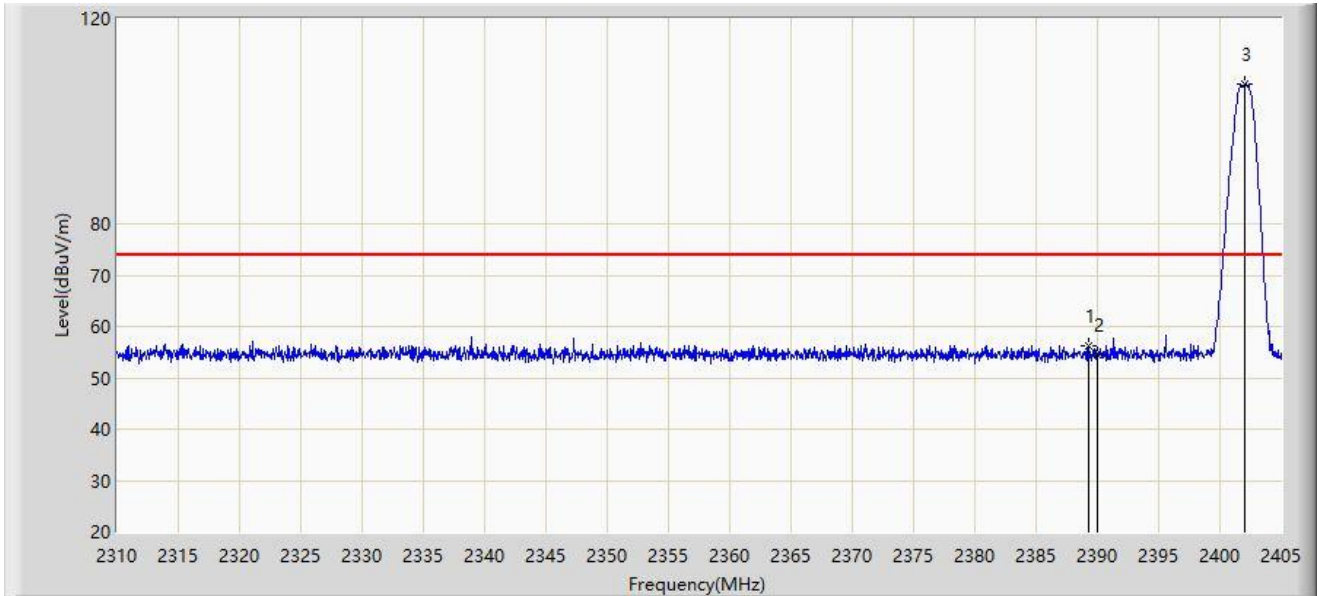


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.230	56.253	24.999	-17.747	74.000	31.254	PK
2		2390.000	54.519	23.265	-19.481	74.000	31.254	PK
3		2402.008	107.182	75.924	N/A	N/A	31.258	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz	

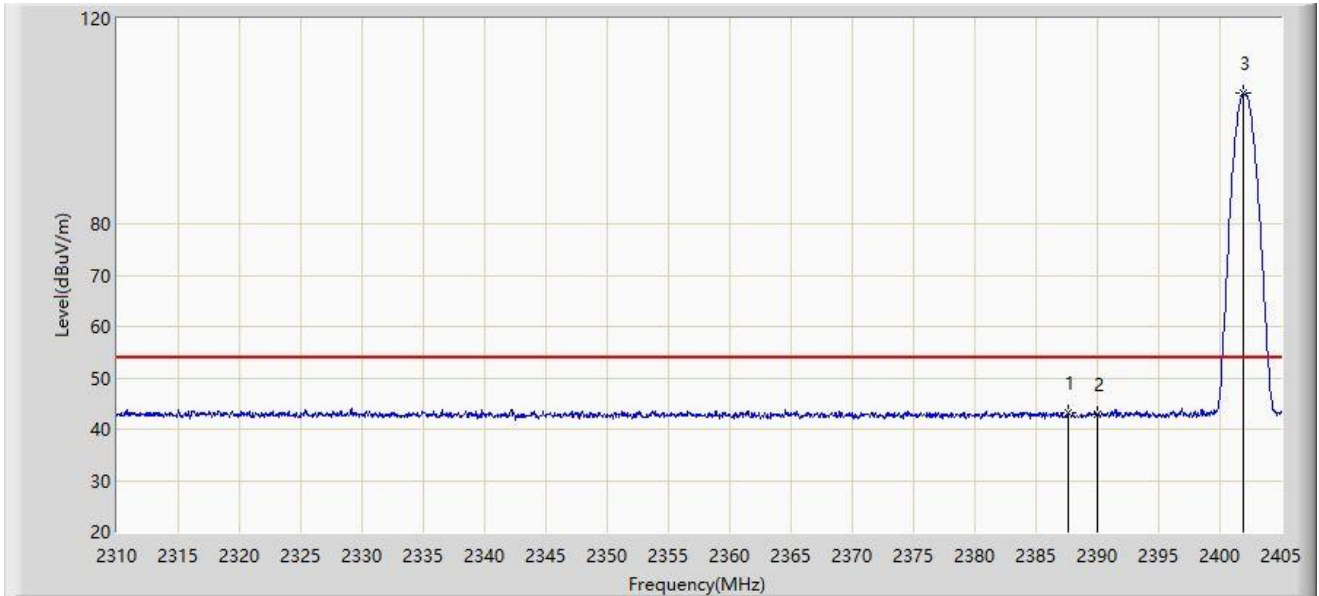


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2387.567	43.322	12.066	-10.678	54.000	31.255	AV
2		2390.000	42.859	11.605	-11.141	54.000	31.254	AV
3		2401.960	105.635	74.377	N/A	N/A	31.258	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz	

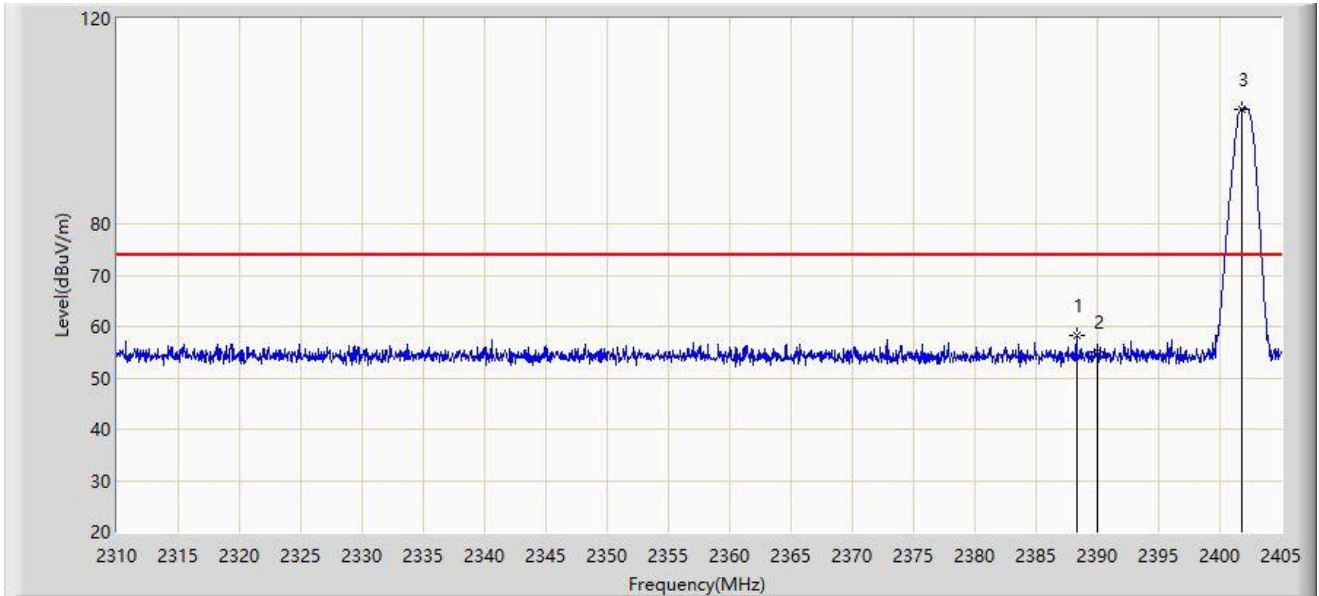


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2388.280	58.171	26.916	-15.829	74.000	31.255	PK
2		2390.000	54.939	23.685	-19.061	74.000	31.254	PK
3		2401.770	102.456	71.198	N/A	N/A	31.257	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz	

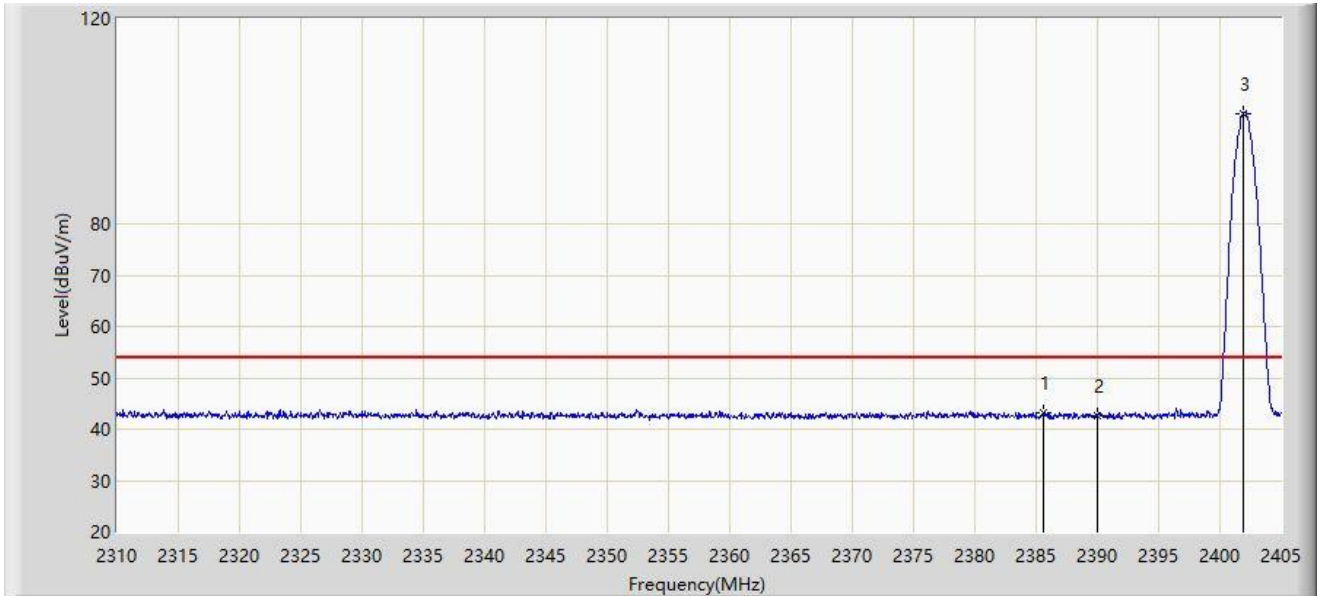


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2385.620	43.292	12.035	-10.708	54.000	31.258	AV
2		2390.000	42.676	11.422	-11.324	54.000	31.254	AV
3		2401.913	101.526	70.268	N/A	N/A	31.258	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2402MHz	

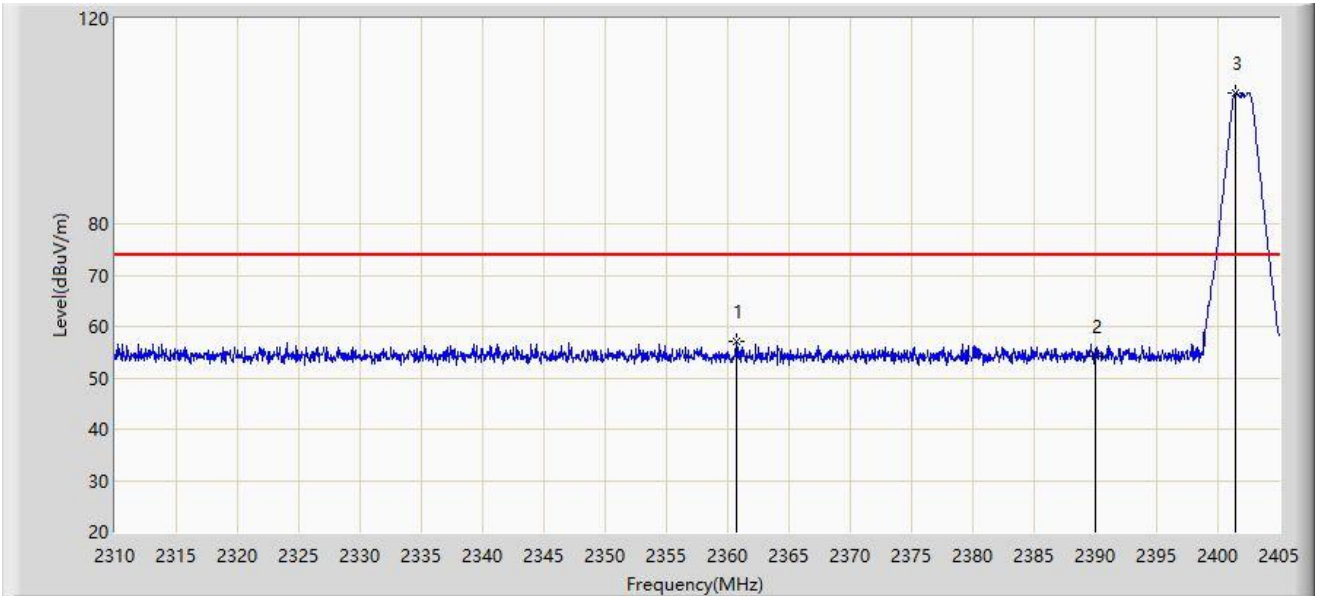


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2360.683	57.111	25.778	-16.889	74.000	31.333	PK
2		2390.000	54.120	22.866	-19.880	74.000	31.254	PK
3		2401.485	105.579	74.321	N/A	N/A	31.258	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2402MHz	

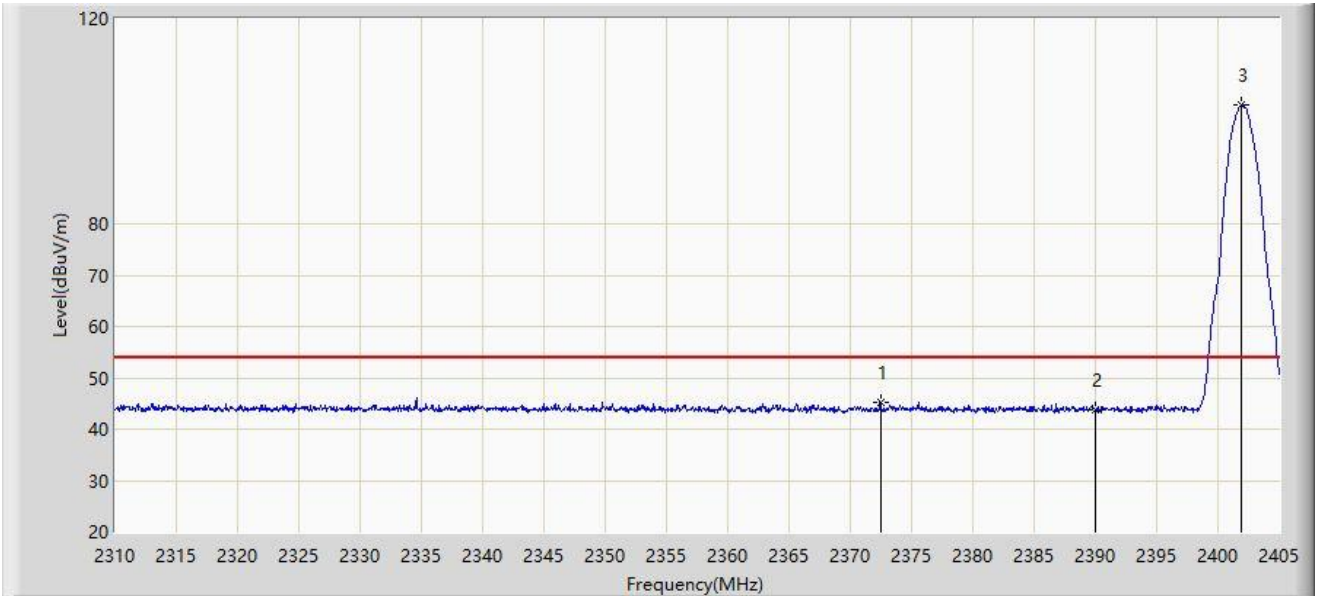


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2372.462	45.175	13.873	-8.825	54.000	31.302	AV
2		2390.000	43.651	12.397	-10.349	54.000	31.254	AV
3		2401.865	103.113	71.855	N/A	N/A	31.258	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2402MHz	

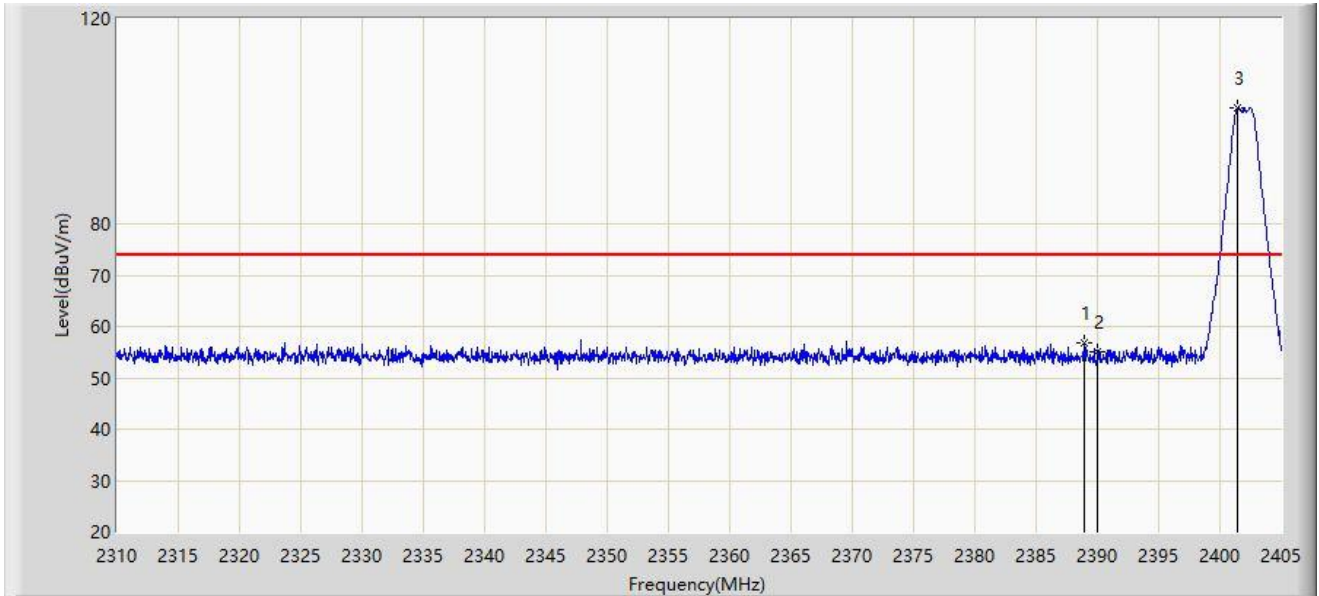


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2388.897	56.802	25.547	-17.198	74.000	31.254	PK
2		2390.000	55.165	23.911	-18.835	74.000	31.254	PK
3		2401.437	102.582	71.324	N/A	N/A	31.258	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2402MHz	

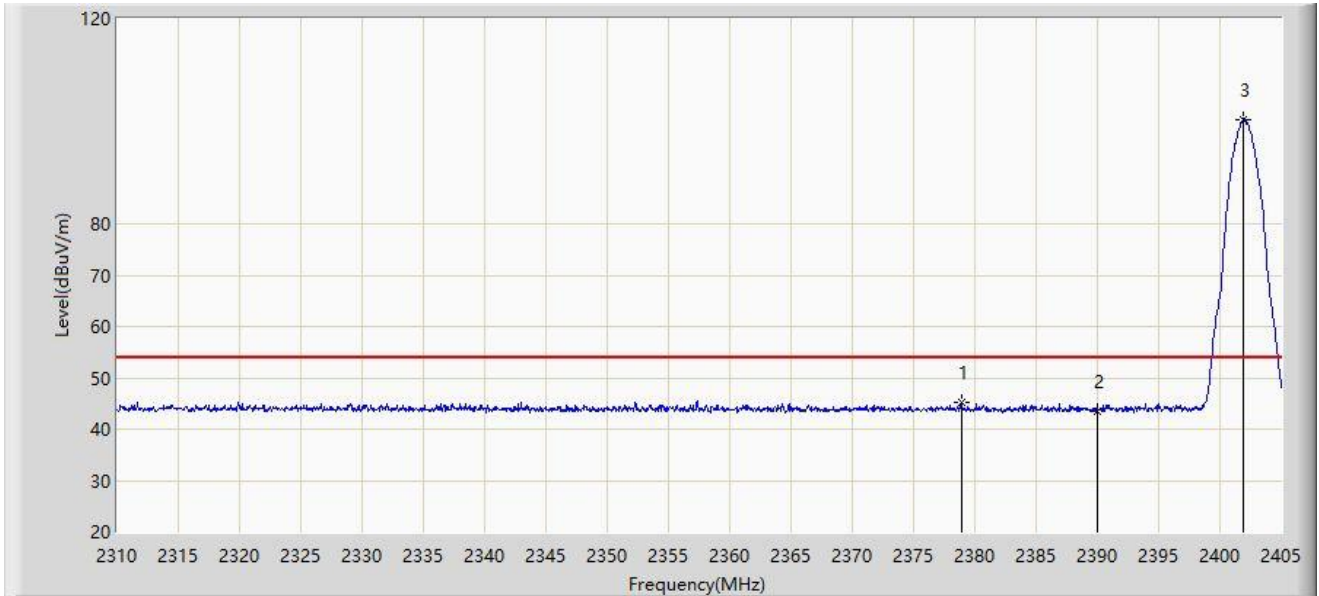

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2378.875	45.309	14.030	-8.691	54.000	31.279	AV
2		2390.000	43.420	12.166	-10.580	54.000	31.254	AV
3		2401.913	100.346	69.088	N/A	N/A	31.258	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Mode 1 – Filter 3#

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2480MHz	

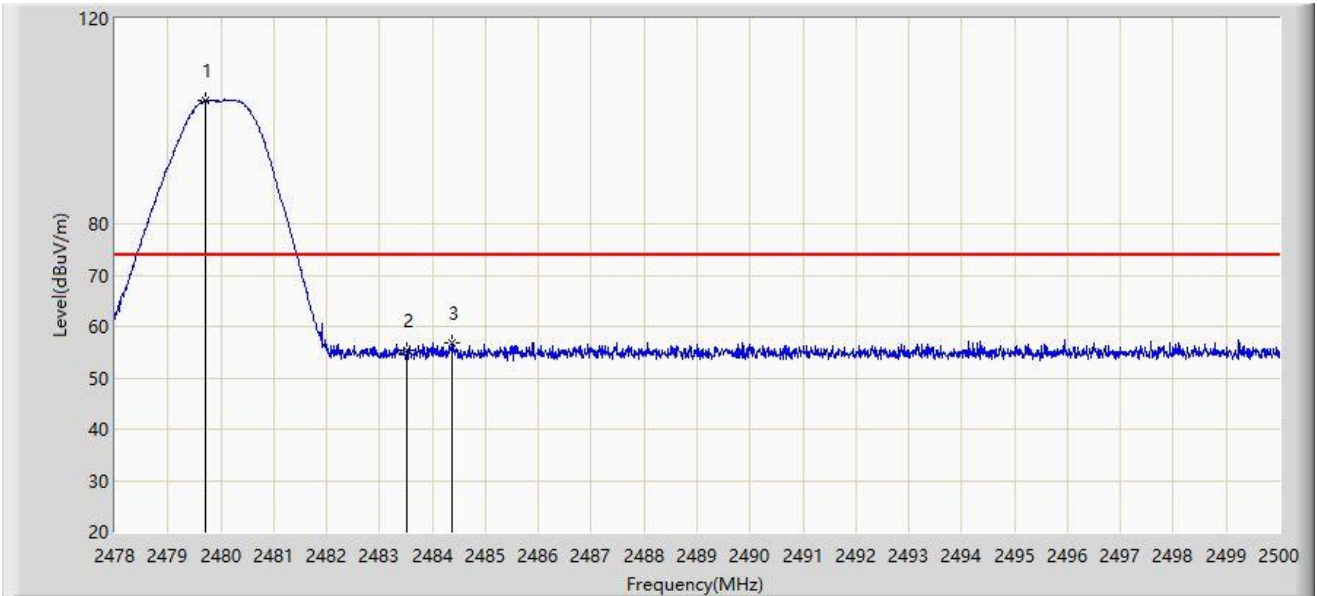


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.705	104.012	72.789	N/A	N/A	31.223	PK
2		2483.500	55.410	24.184	-18.590	74.000	31.226	PK
3	*	2484.358	56.771	25.544	-17.229	74.000	31.227	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2480MHz	

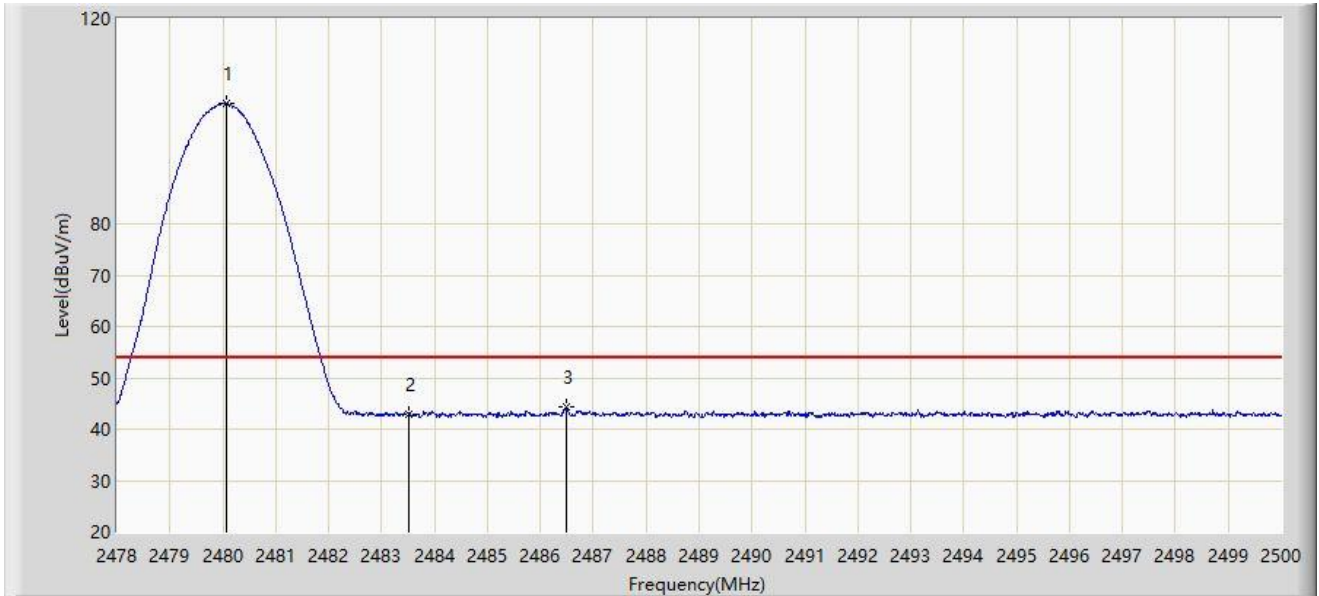


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.068	103.426	72.202	N/A	N/A	31.224	AV
2		2483.500	42.772	11.546	-11.228	54.000	31.226	AV
3	*	2486.481	44.255	13.027	-9.745	54.000	31.228	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2480MHz	

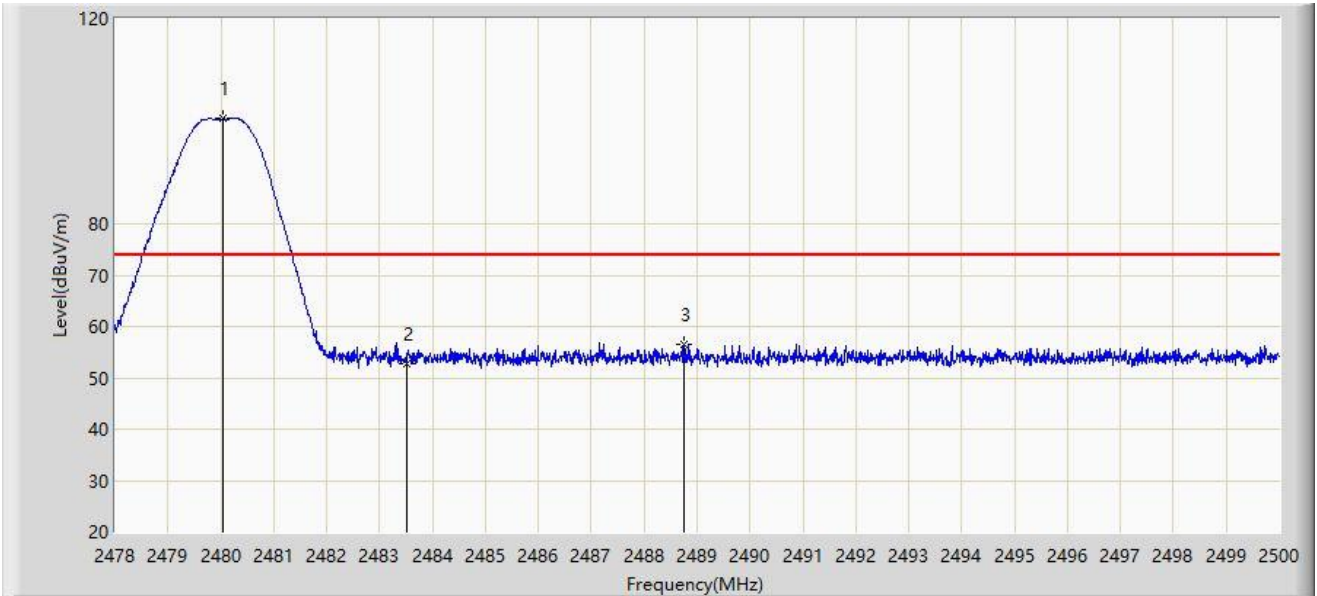


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.035	100.656	69.432	N/A	N/A	31.224	PK
2		2483.500	52.646	21.420	-21.354	74.000	31.226	PK
3	*	2488.758	56.618	25.388	-17.382	74.000	31.230	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2480MHz	

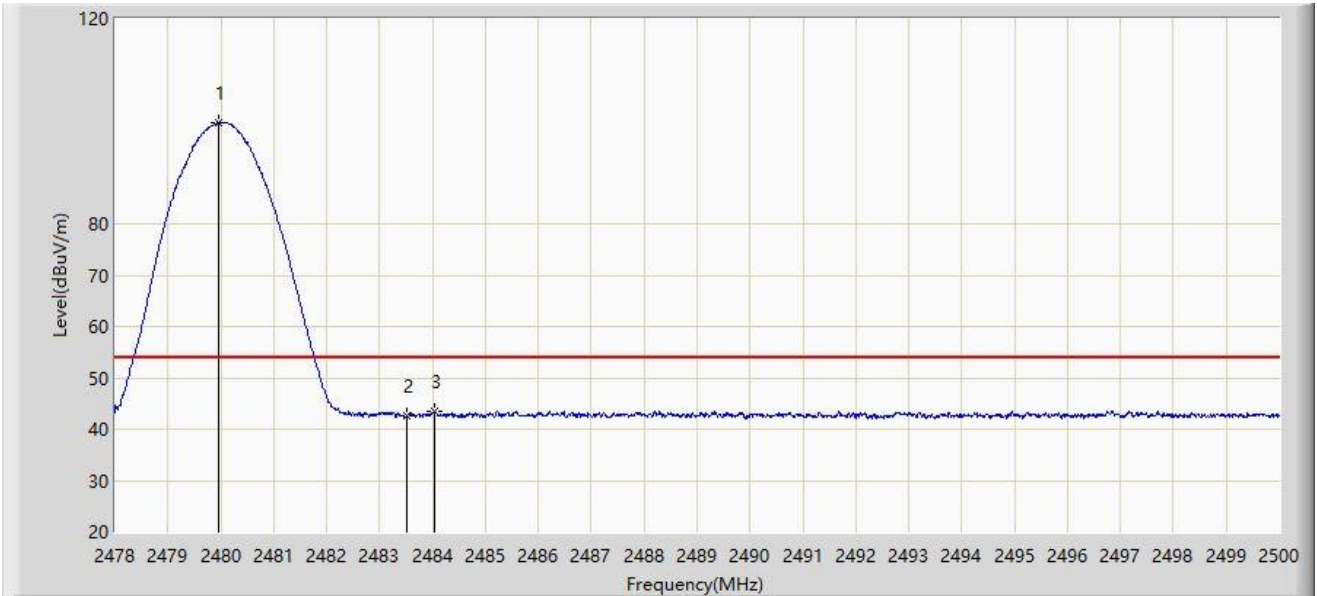


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.958	99.667	68.443	N/A	N/A	31.224	AV
2		2483.500	42.649	11.423	-11.351	54.000	31.226	AV
3	*	2484.028	43.411	12.184	-10.589	54.000	31.227	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2480MHz	

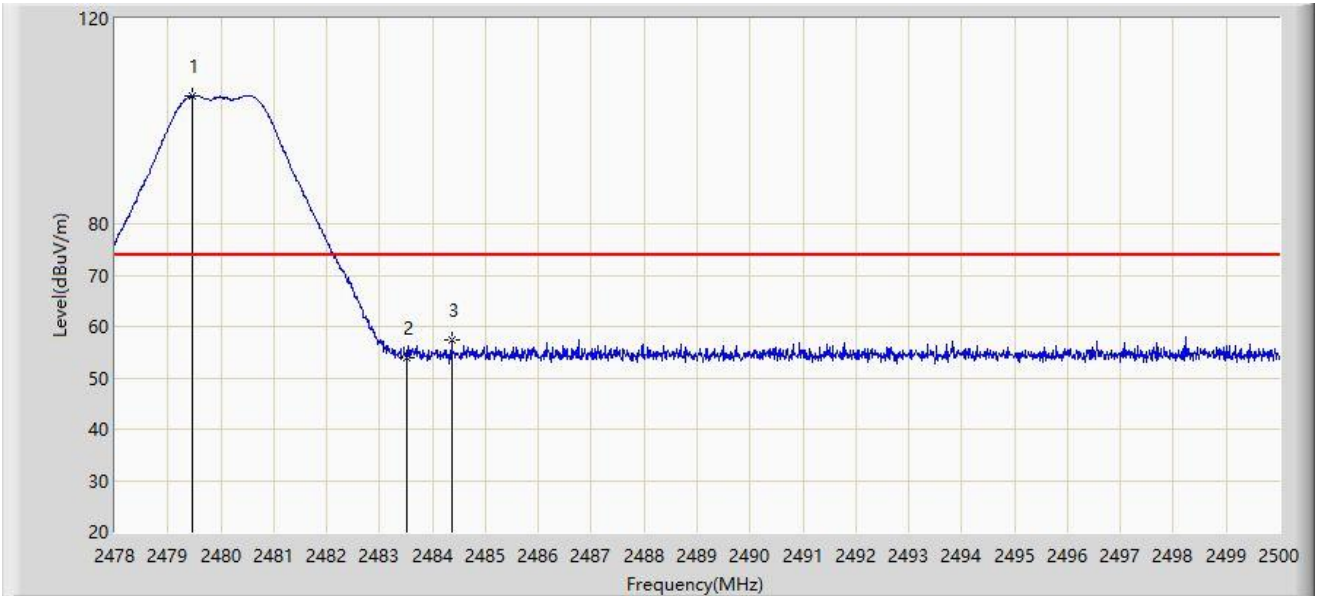


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		2479.463	104.950	73.727	N/A	N/A	31.223	PK
2		2483.500	54.047	22.821	-19.953	74.000	31.226	PK
3	*	2484.369	57.283	26.056	-16.717	74.000	31.227	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2480MHz	

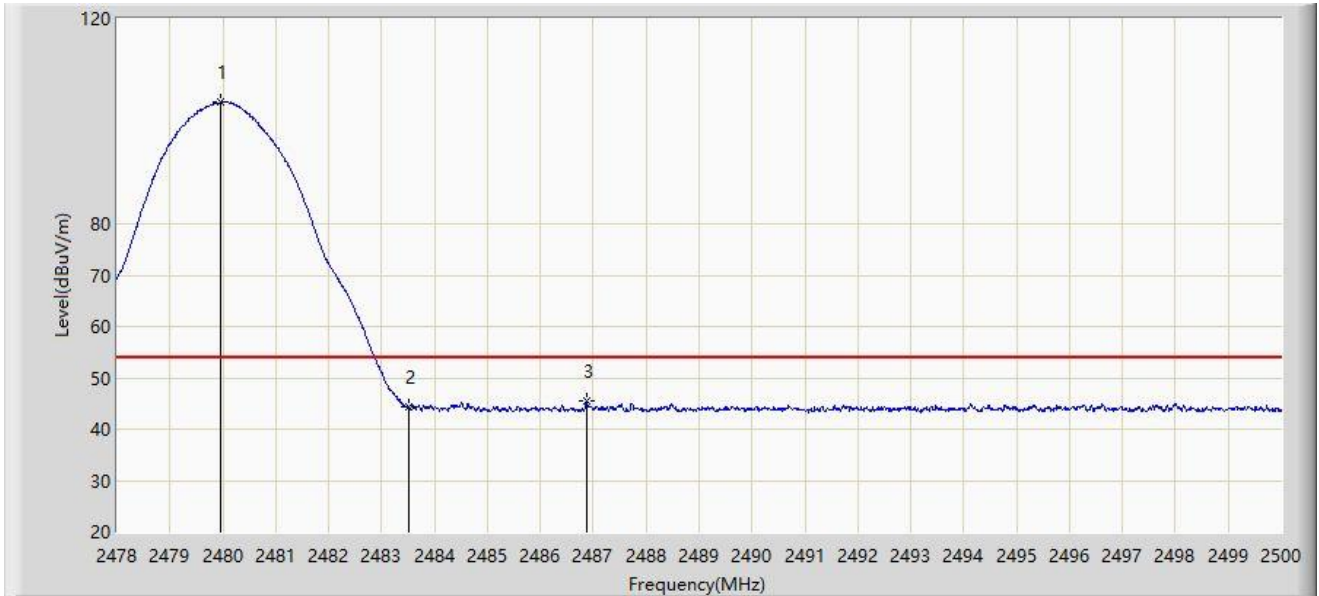


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.969	103.713	72.489	N/A	N/A	31.224	AV
2		2483.500	44.426	13.200	-9.574	54.000	31.226	AV
3	*	2486.866	45.620	14.391	-8.380	54.000	31.229	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2480MHz	

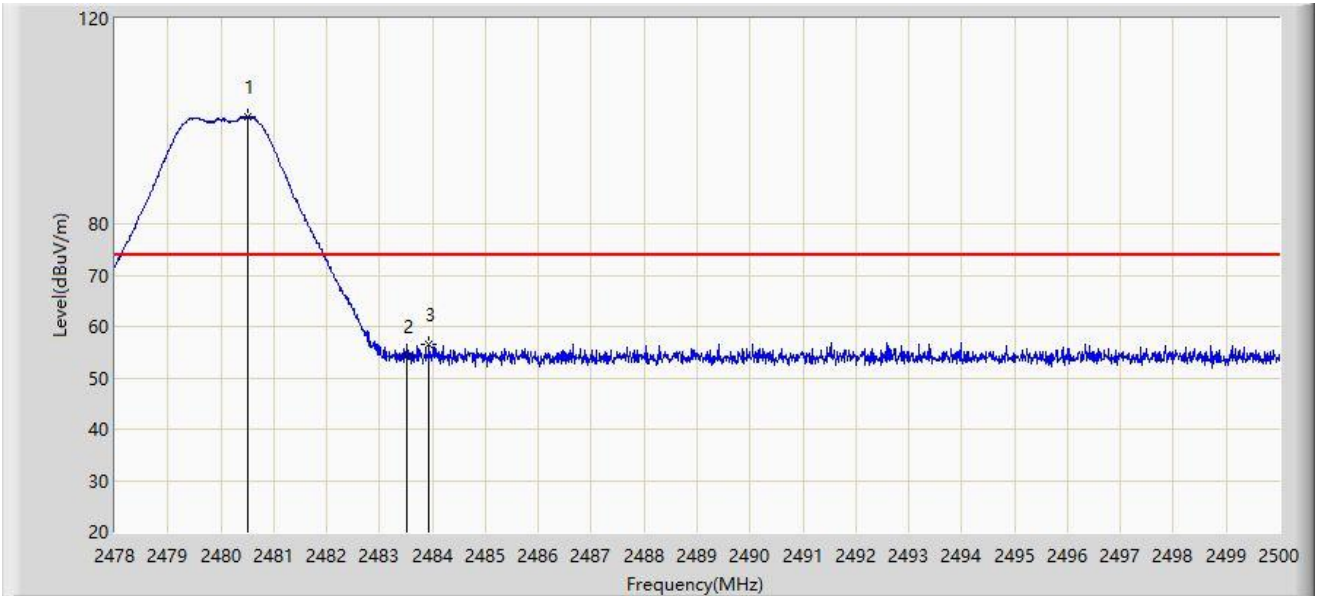


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2480.508	100.910	69.686	N/A	N/A	31.224	PK
2		2483.500	54.138	22.912	-19.862	74.000	31.226	PK
3	*	2483.940	56.401	25.174	-17.599	74.000	31.227	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2480MHz	

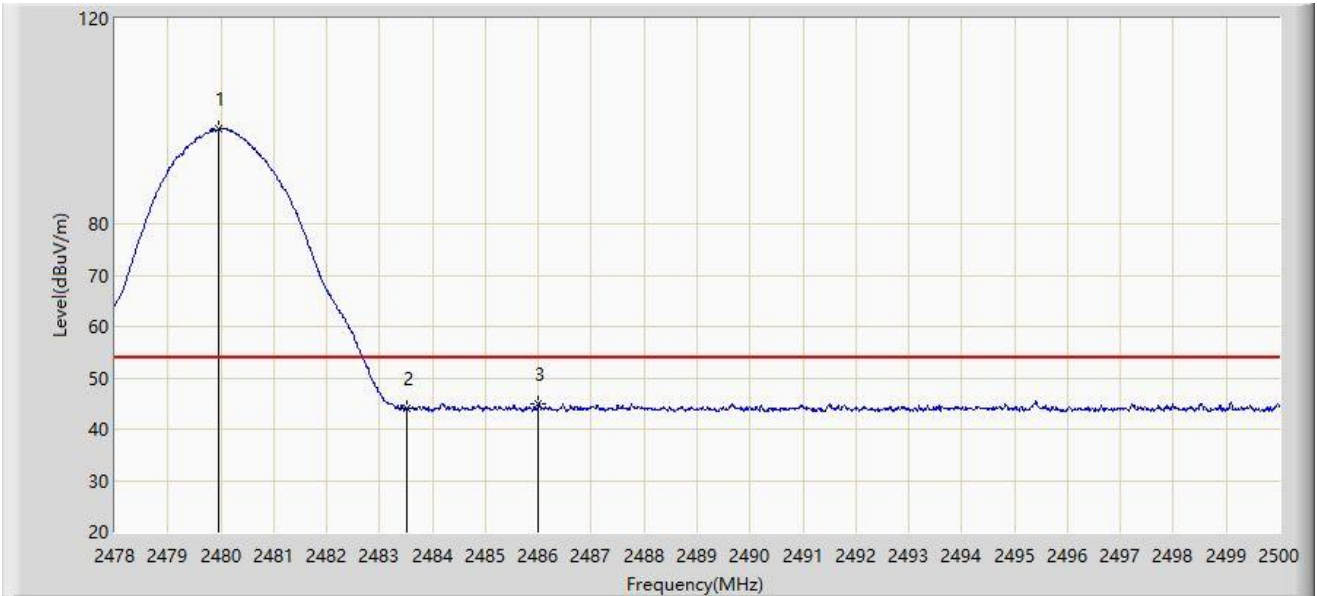

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.947	98.420	67.196	N/A	N/A	31.224	AV
2		2483.500	43.928	12.702	-10.072	54.000	31.226	AV
3	*	2486.008	44.952	13.724	-9.048	54.000	31.228	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Mode 2 – Filter 1#

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz	

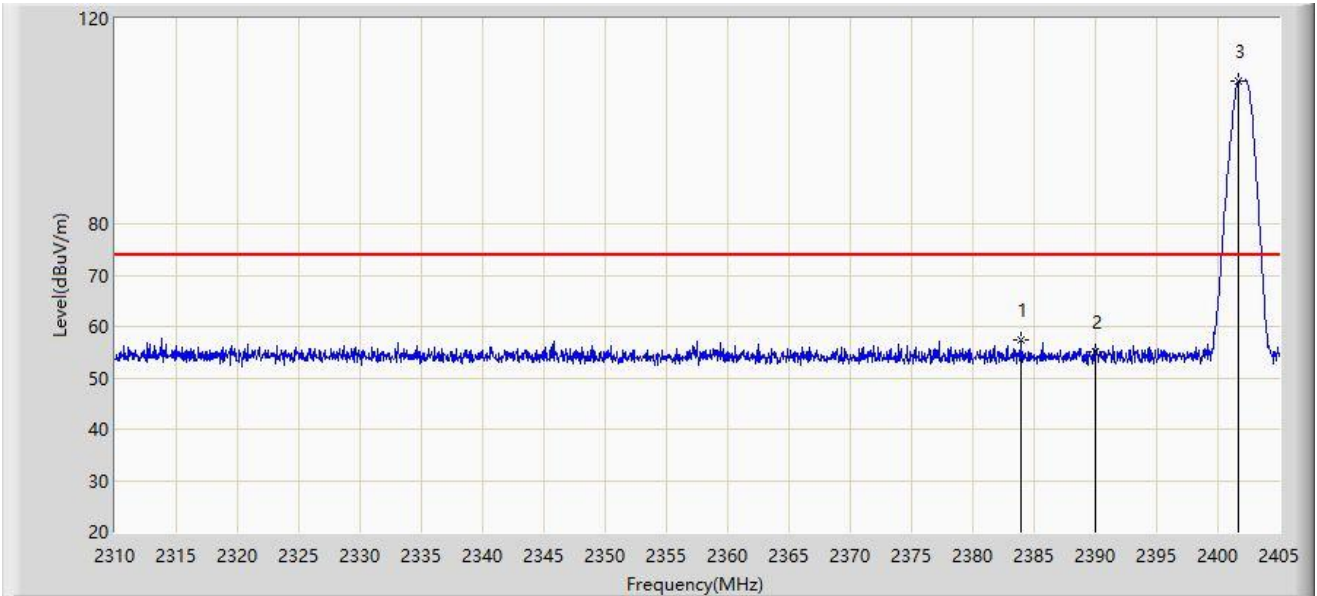


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2383.958	57.371	26.112	-16.629	74.000	31.259	PK
2		2390.000	55.046	23.792	-18.954	74.000	31.254	PK
3		2401.722	107.826	76.568	N/A	N/A	31.258	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz	

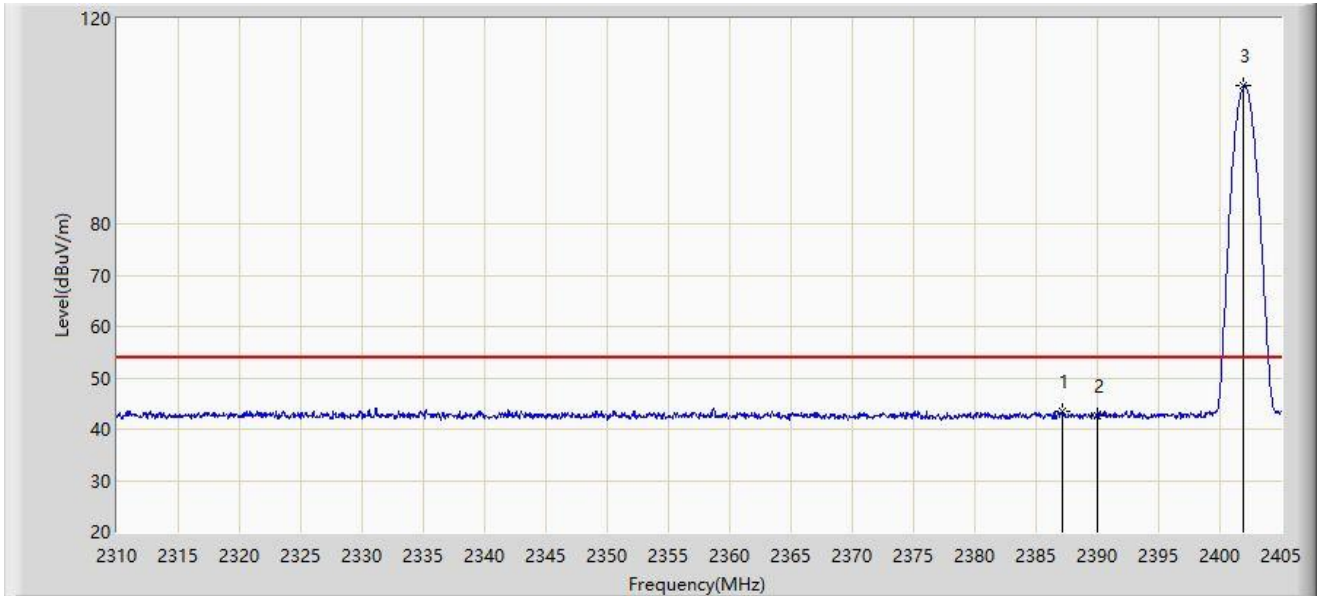


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2387.187	43.385	12.129	-10.615	54.000	31.256	AV
2		2390.000	42.642	11.388	-11.358	54.000	31.254	AV
3		2401.960	106.874	75.616	N/A	N/A	31.258	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz	

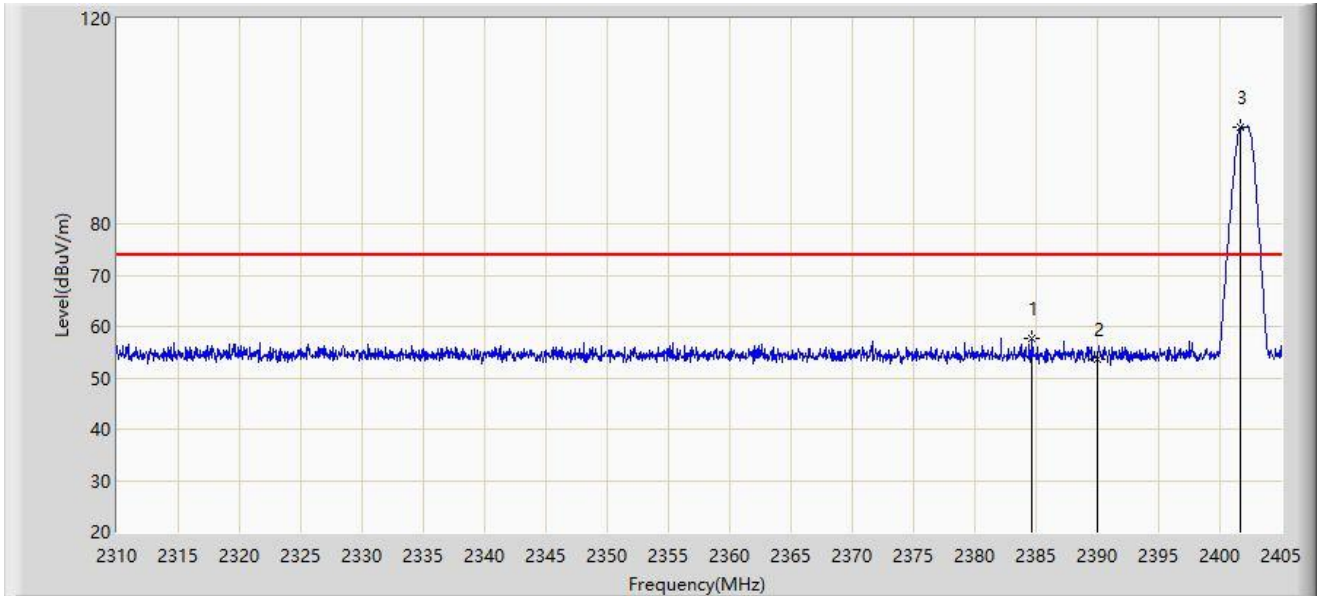


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2384.670	57.730	26.472	-16.270	74.000	31.259	PK
2		2390.000	53.716	22.462	-20.284	74.000	31.254	PK
3		2401.722	98.836	67.578	N/A	N/A	31.258	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz	

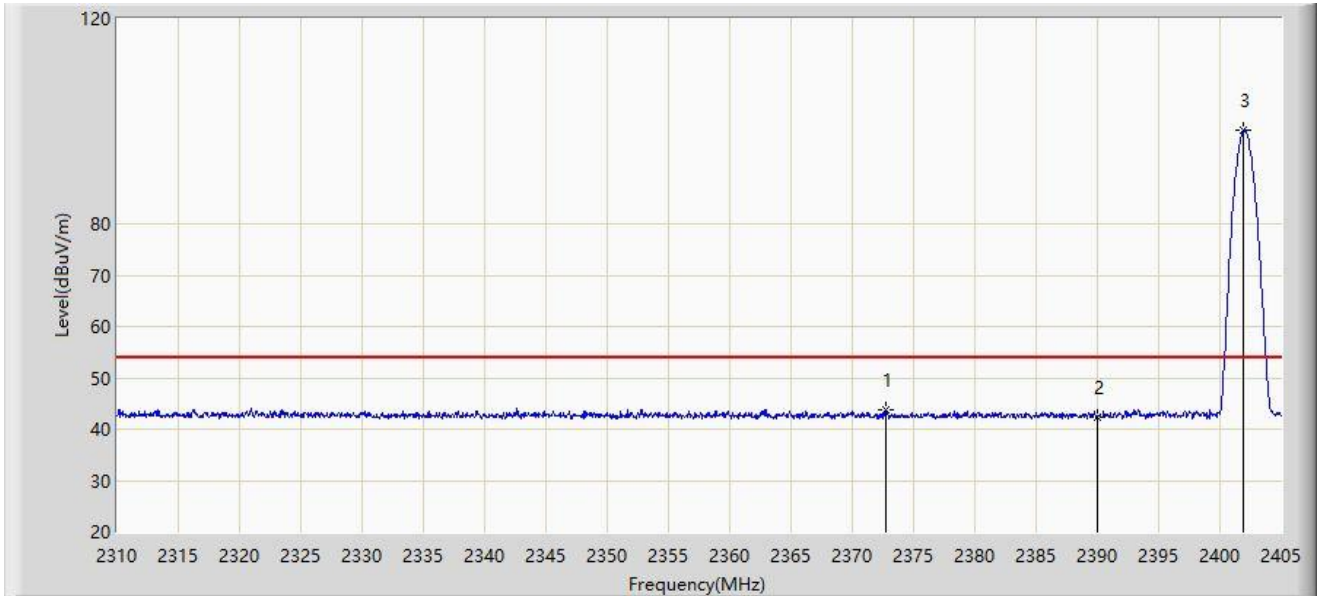


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2372.700	43.697	12.396	-10.303	54.000	31.301	AV
2		2390.000	42.400	11.146	-11.600	54.000	31.254	AV
3		2401.960	98.176	66.918	N/A	N/A	31.258	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2480MHz	

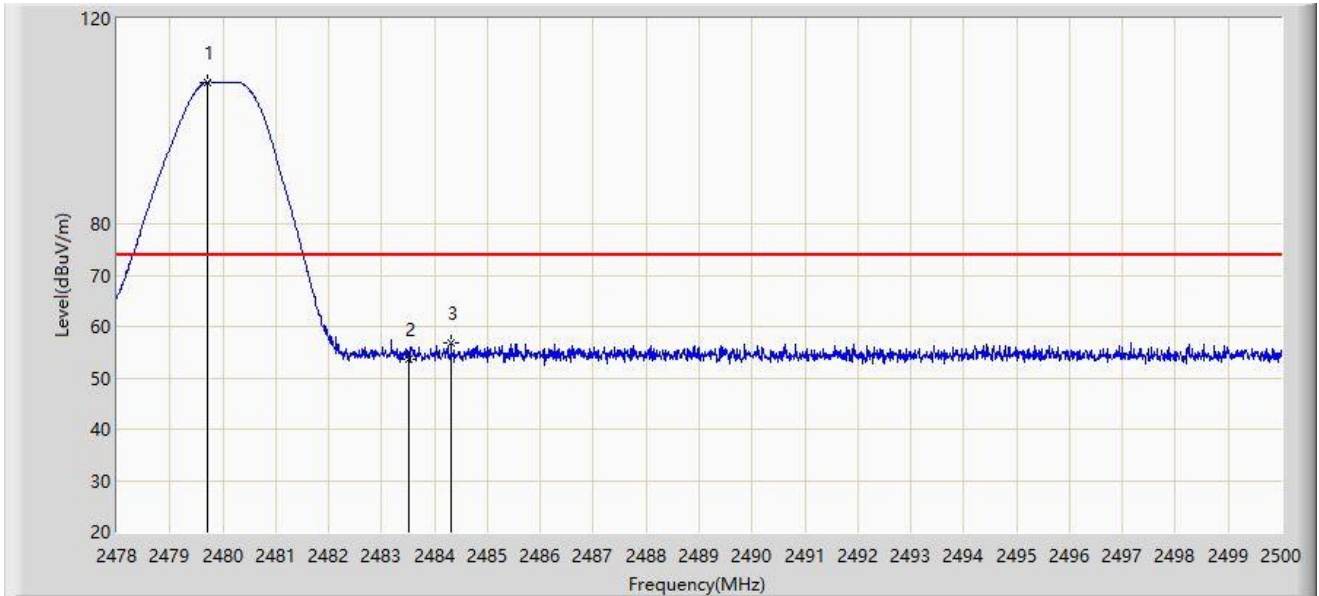


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.705	107.604	76.381	N/A	N/A	31.223	PK
2		2483.500	53.528	22.302	-20.472	74.000	31.226	PK
3	*	2484.314	56.802	25.575	-17.198	74.000	31.227	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2480MHz	

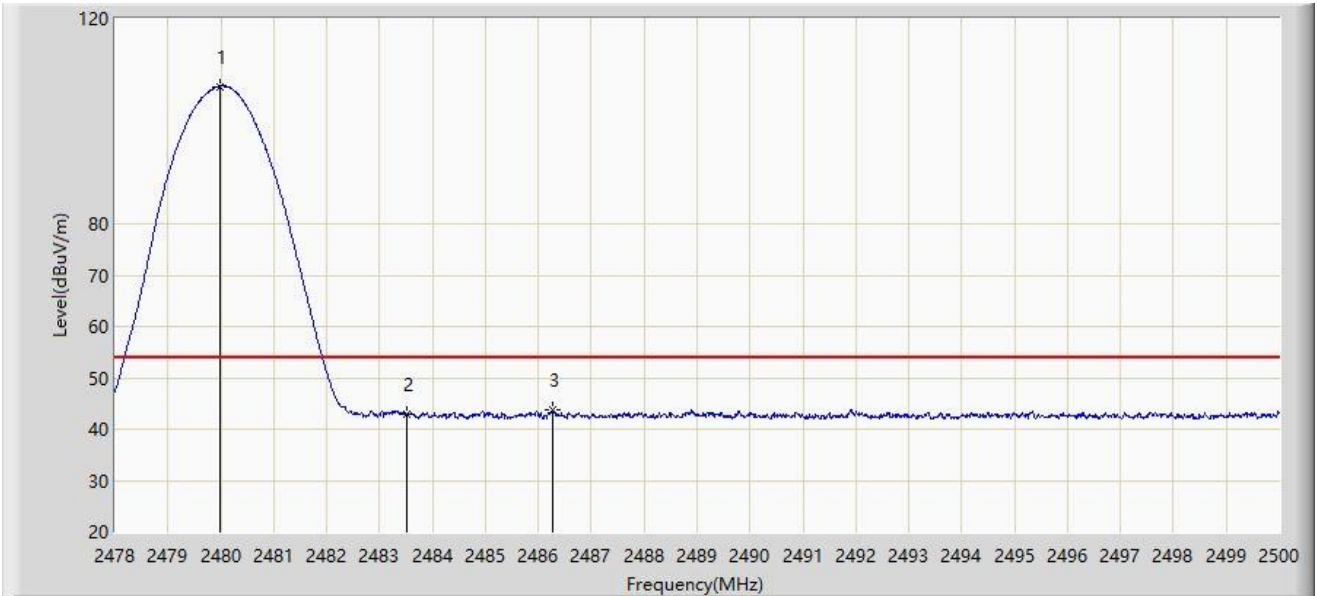


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.980	106.808	75.584	N/A	N/A	31.224	AV
2		2483.500	42.851	11.625	-11.149	54.000	31.226	AV
3	*	2486.283	43.778	12.550	-10.222	54.000	31.228	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2480MHz	

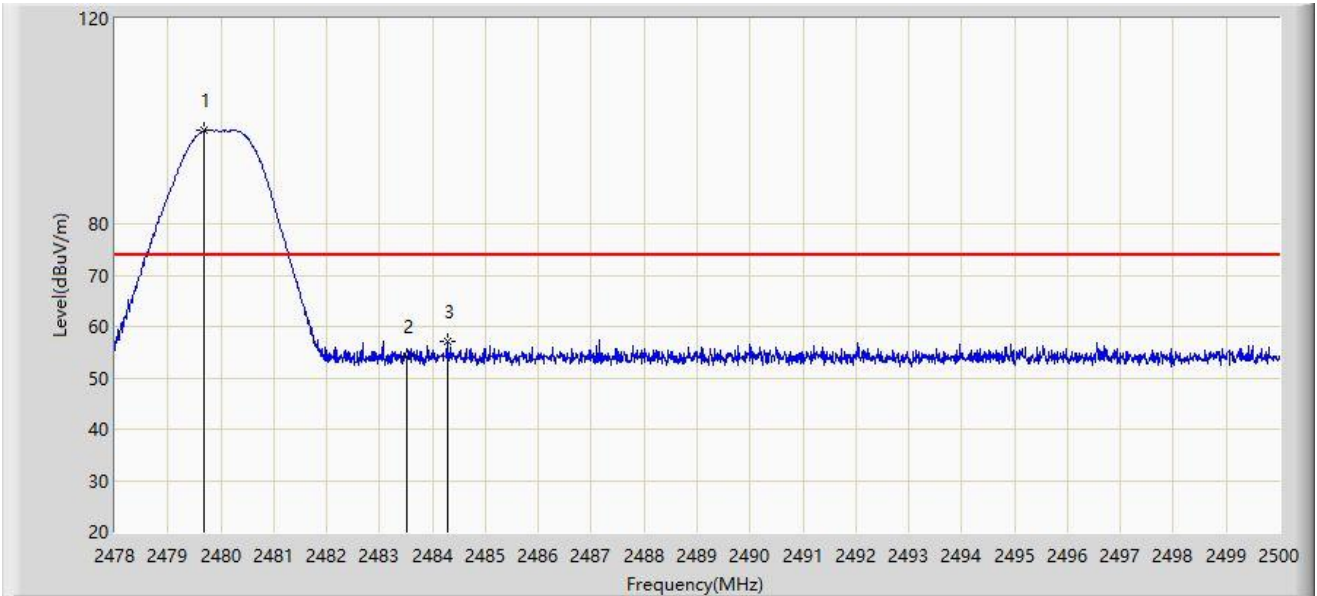


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.672	98.137	66.914	N/A	N/A	31.223	PK
2		2483.500	54.294	23.068	-19.706	74.000	31.226	PK
3	*	2484.281	57.029	25.802	-16.971	74.000	31.227	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2480MHz	

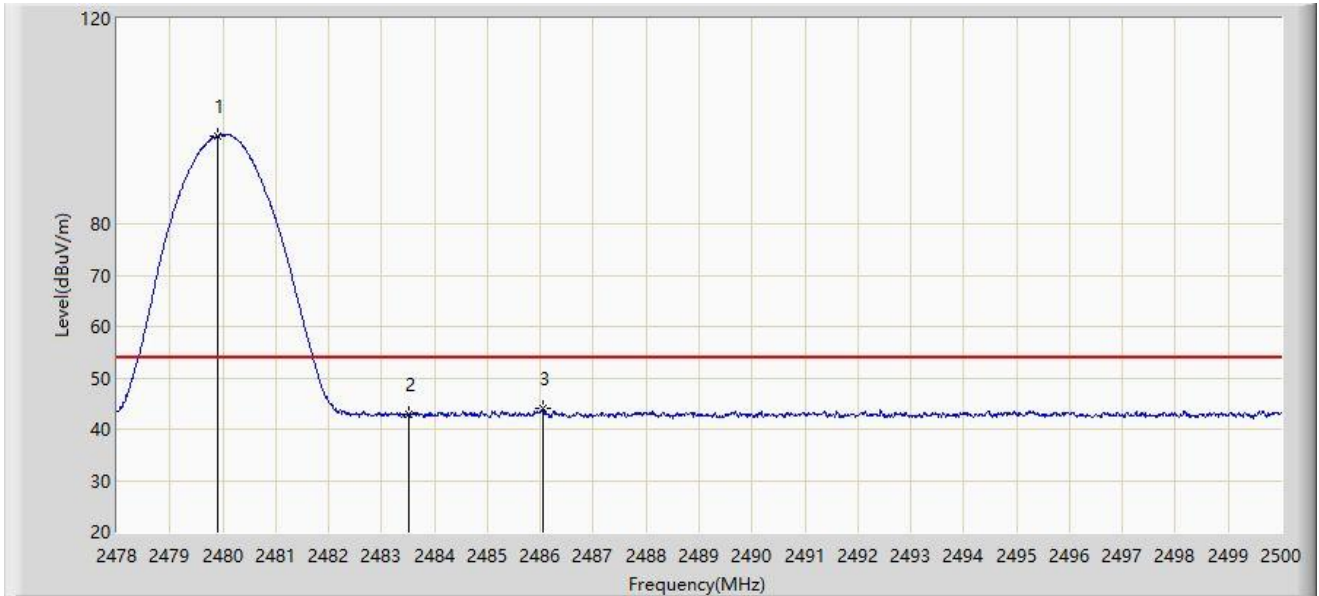


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.903	97.184	65.960	N/A	N/A	31.224	AV
2		2483.500	42.982	11.756	-11.018	54.000	31.226	AV
3	*	2486.041	43.960	12.732	-10.040	54.000	31.228	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2402MHz	

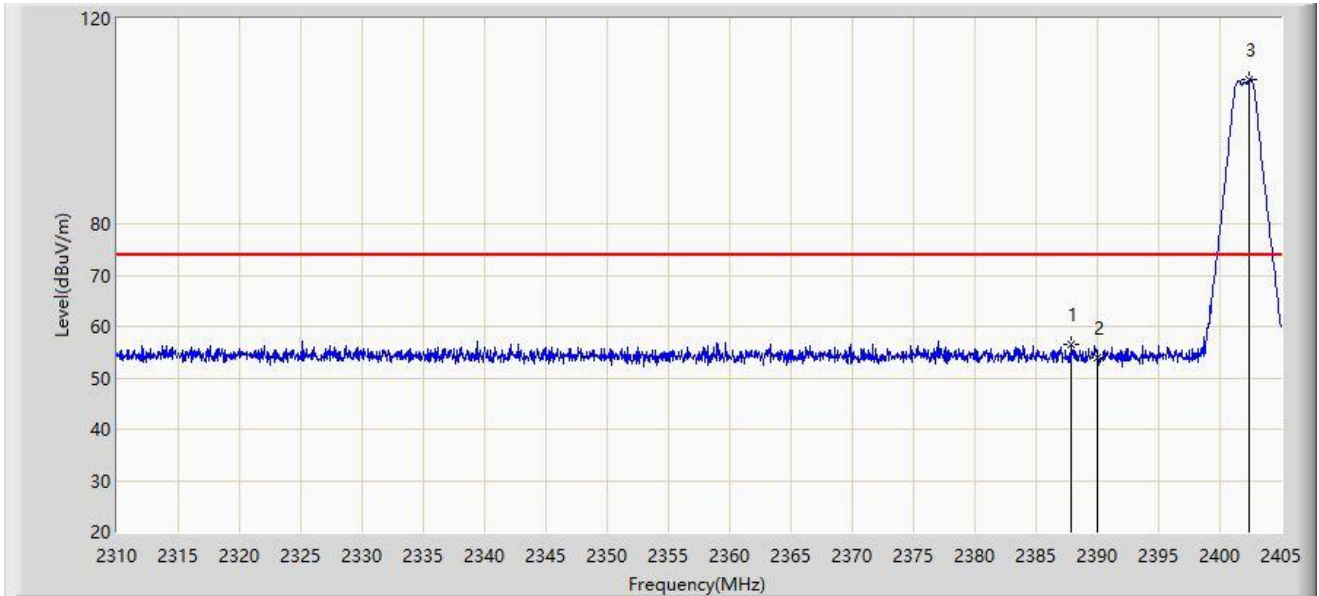


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	2387.900	56.460	25.205	-17.540	74.000	31.255	PK
2		2390.000	53.918	22.664	-20.082	74.000	31.254	PK
3		2402.435	108.130	76.872	N/A	N/A	31.258	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2402MHz	

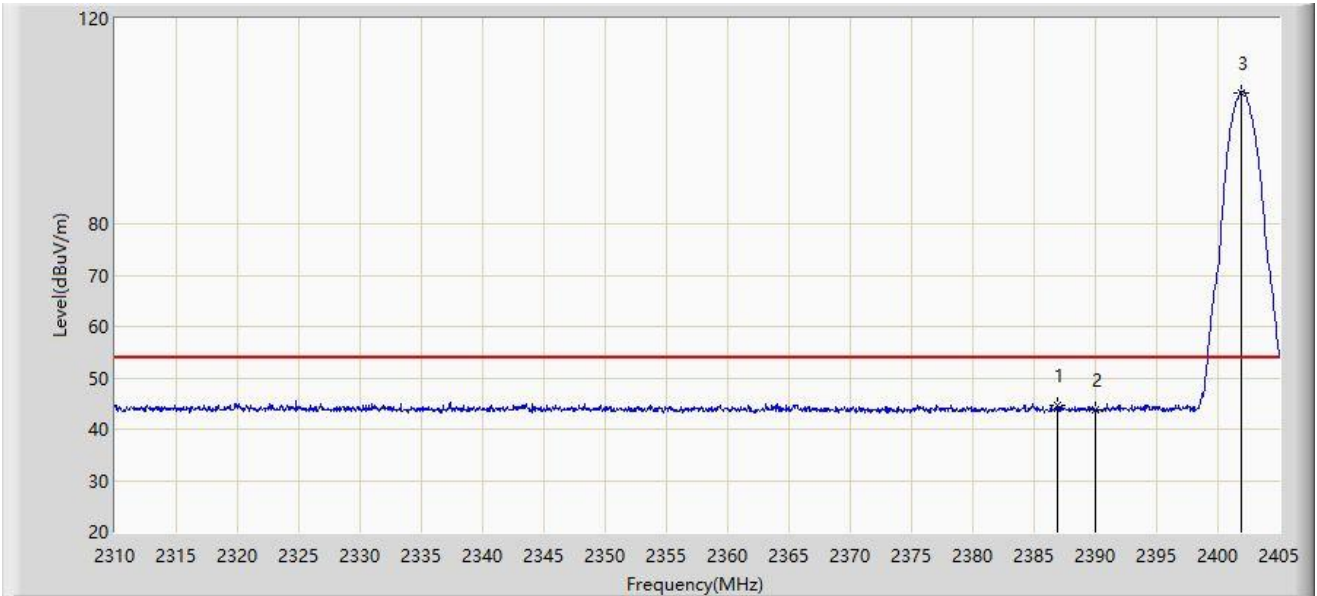


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2386.950	44.662	13.406	-9.338	54.000	31.256	AV
2		2390.000	43.780	12.526	-10.220	54.000	31.254	AV
3		2401.865	105.570	74.312	N/A	N/A	31.258	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2402MHz	

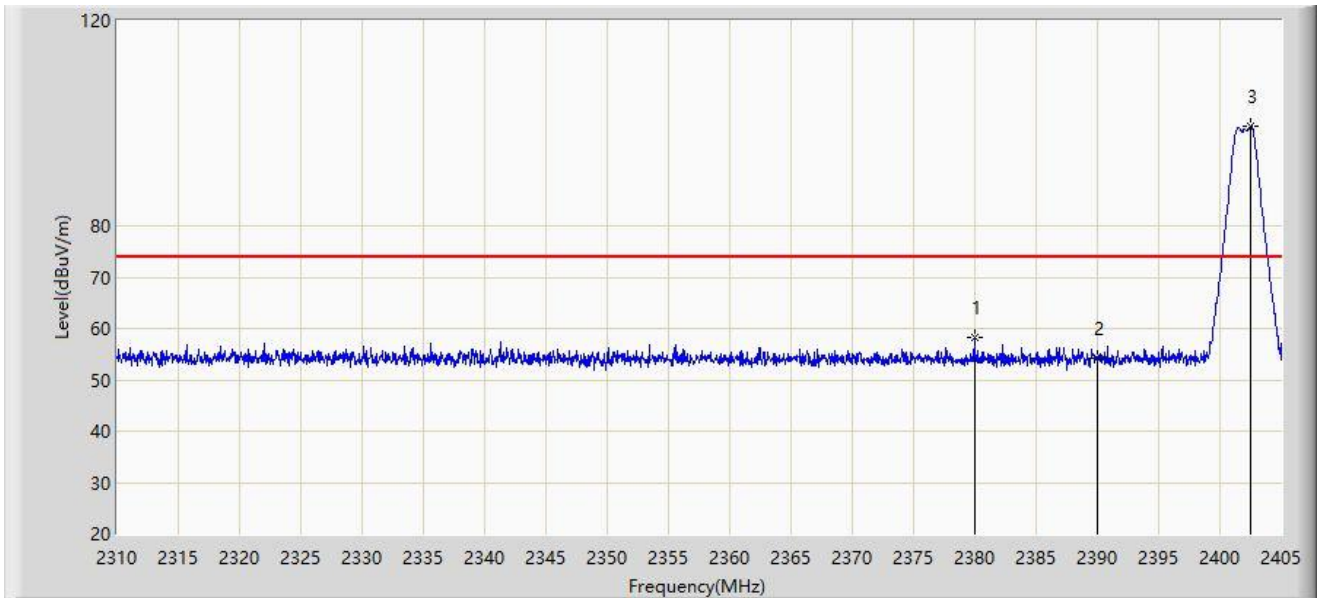


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2379.968	58.158	26.883	-15.842	74.000	31.275	PK
2		2390.000	54.180	22.926	-19.820	74.000	31.254	PK
3		2402.482	99.383	68.125	N/A	N/A	31.258	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2402MHz	

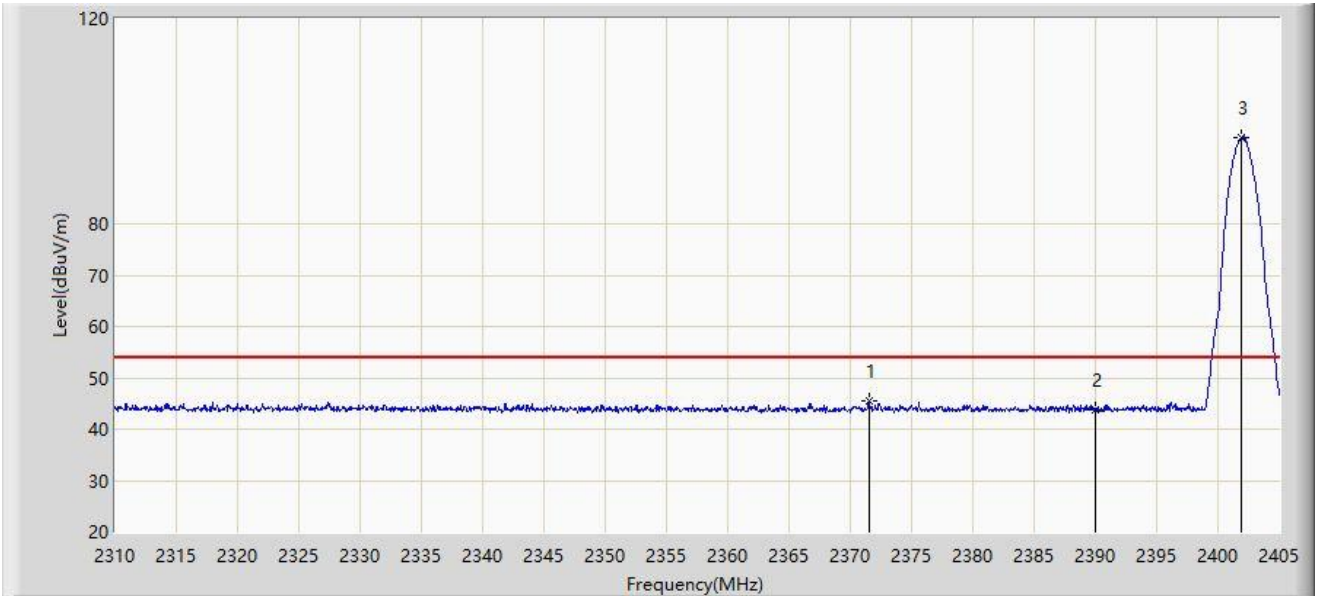


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2371.512	45.582	14.277	-8.418	54.000	31.305	AV
2		2390.000	43.868	12.614	-10.132	54.000	31.254	AV
3		2401.960	96.901	65.643	N/A	N/A	31.258	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2480MHz	

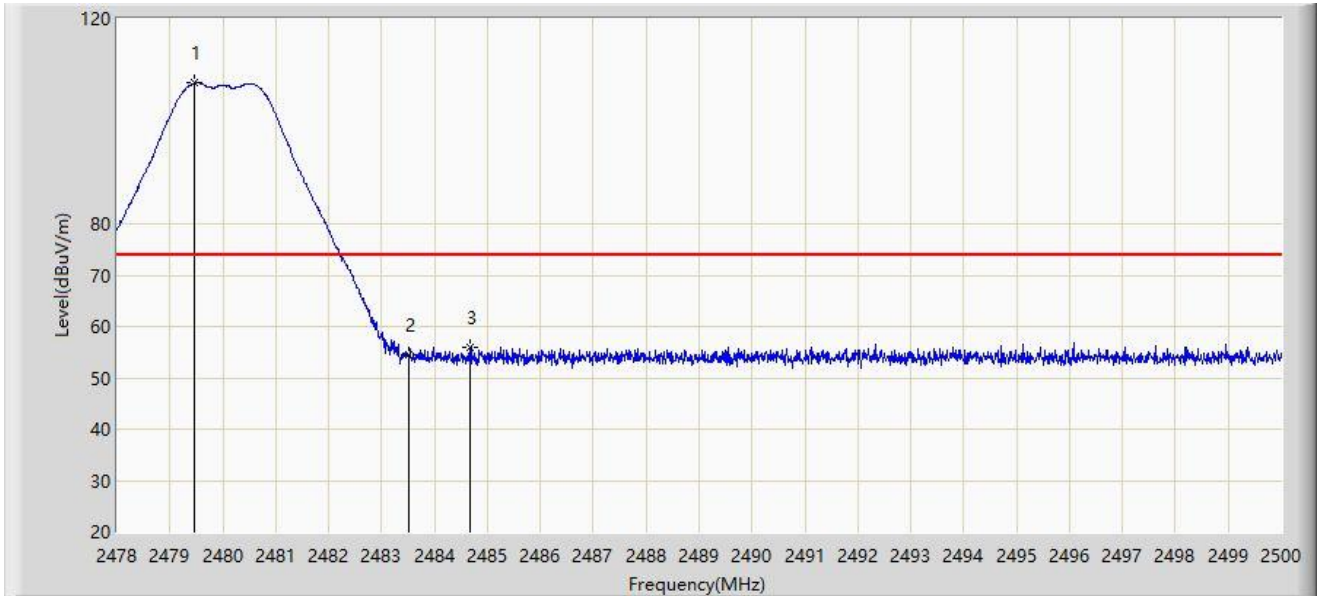


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.463	107.440	76.217	N/A	N/A	31.223	PK
2		2483.500	54.637	23.411	-19.363	74.000	31.226	PK
3	*	2484.677	56.074	24.847	-17.926	74.000	31.227	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2480MHz	

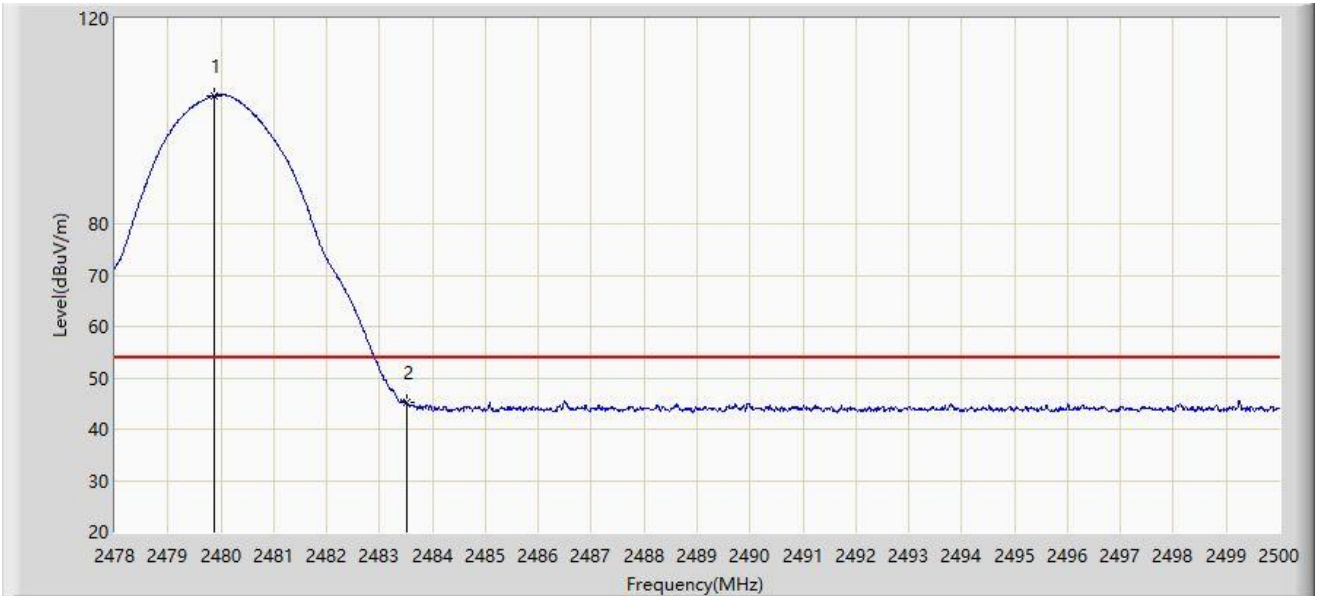


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.870	104.944	73.720	N/A	N/A	31.224	AV
2	*	2483.500	45.228	14.002	-8.772	54.000	31.226	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2480MHz	

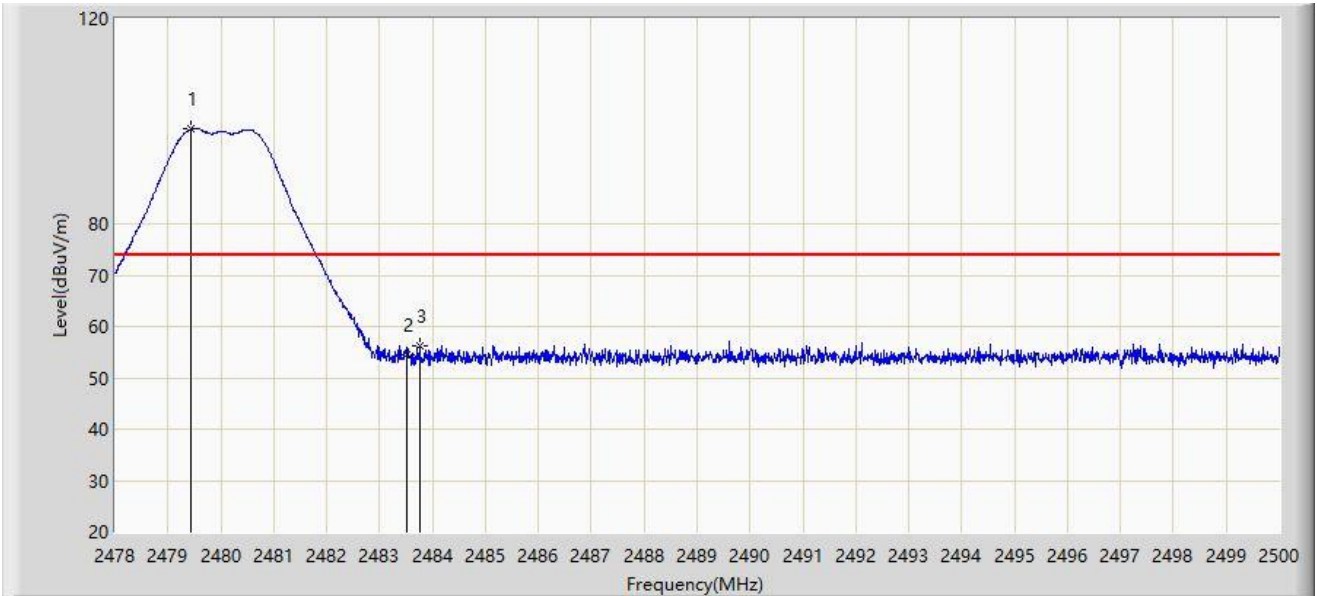


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.441	98.472	67.249	N/A	N/A	31.223	PK
2		2483.500	54.485	23.259	-19.515	74.000	31.226	PK
3	*	2483.764	56.297	25.071	-17.703	74.000	31.226	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2480MHz	

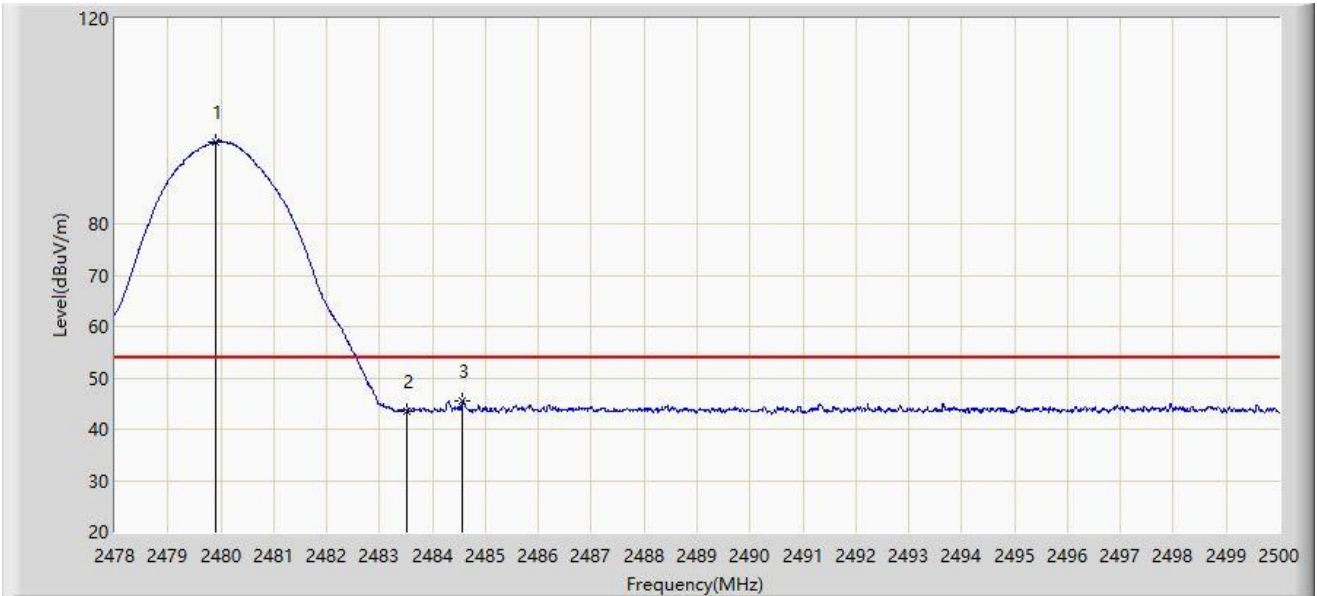

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.914	96.004	64.780	N/A	N/A	31.224	AV
2		2483.500	43.481	12.255	-10.519	54.000	31.226	AV
3	*	2484.567	45.400	14.173	-8.600	54.000	31.227	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Mode 2 – Filter 5#

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz	

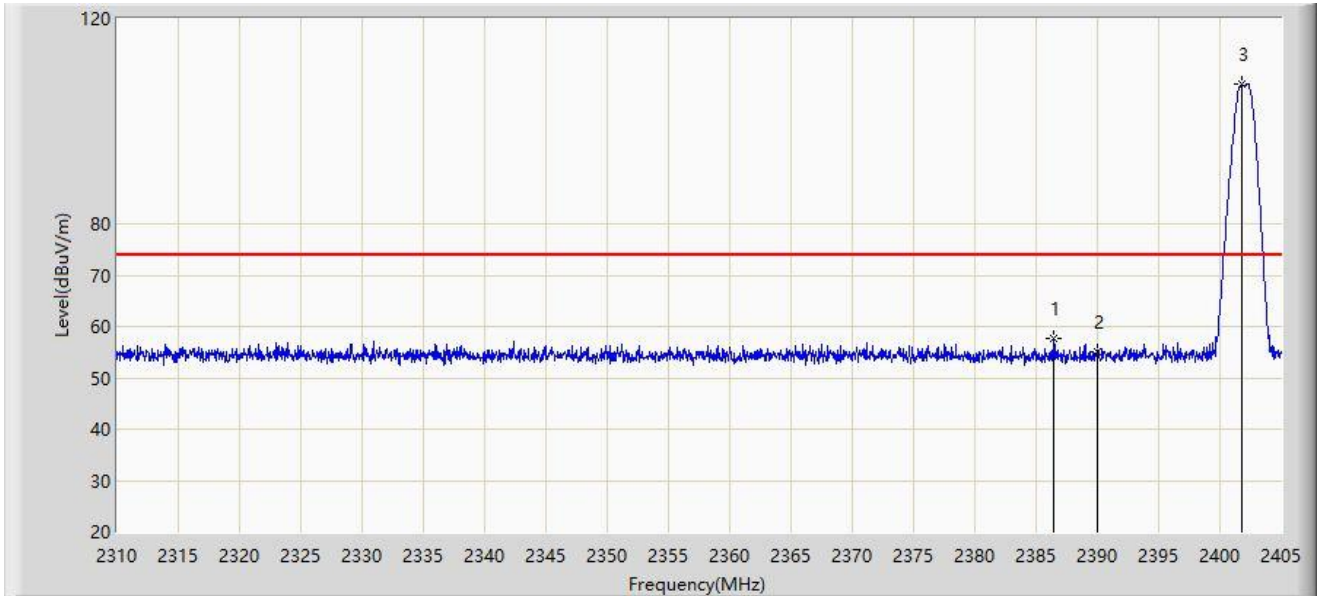


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2386.475	57.805	26.548	-16.195	74.000	31.257	PK
2		2390.000	55.089	23.835	-18.911	74.000	31.254	PK
3		2401.770	107.122	75.864	N/A	N/A	31.257	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz	

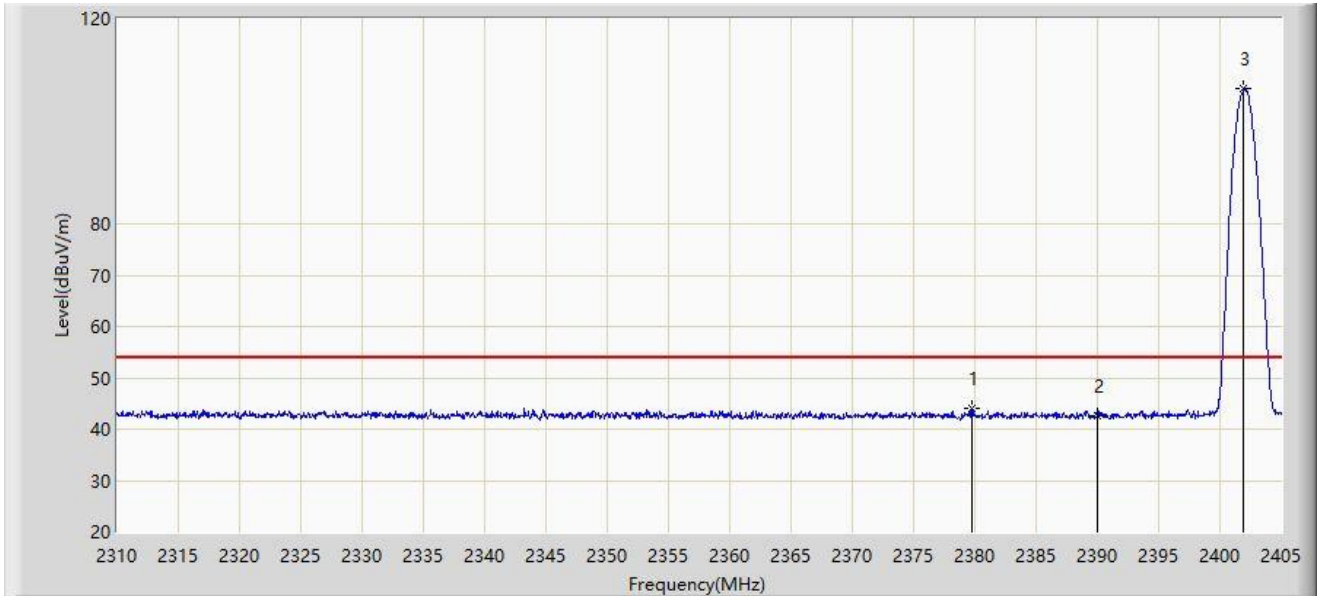


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2379.730	43.980	12.704	-10.020	54.000	31.275	AV
2		2390.000	42.639	11.385	-11.361	54.000	31.254	AV
3		2401.960	106.278	75.020	N/A	N/A	31.258	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz	

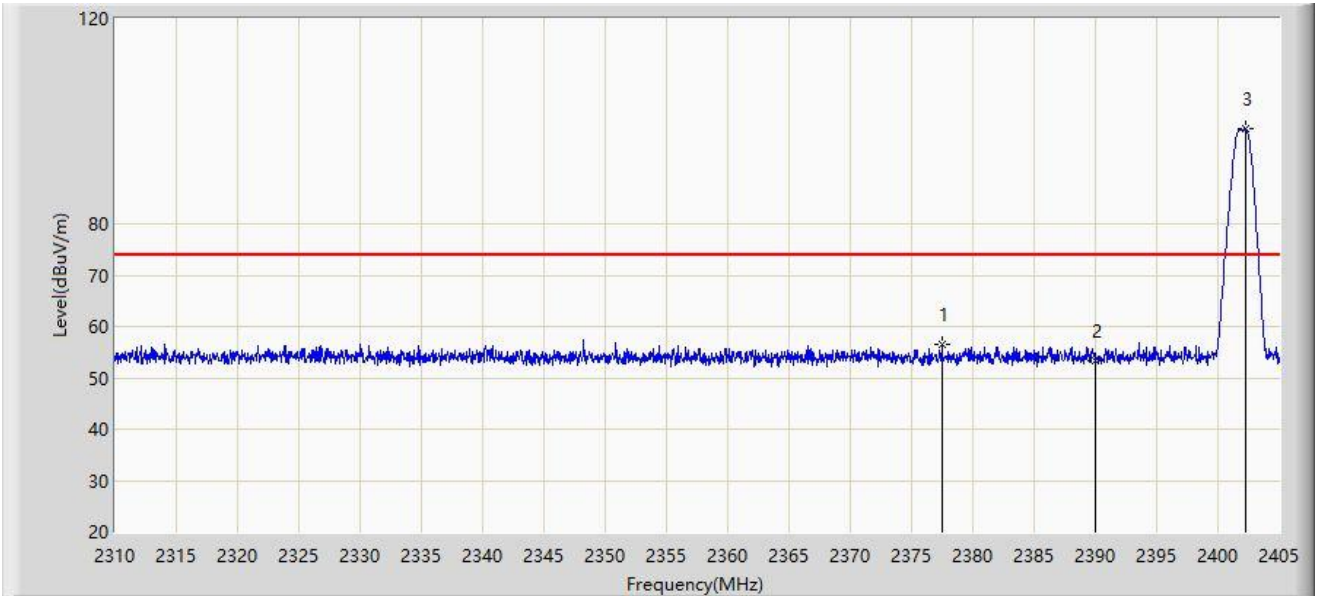


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2377.450	56.589	25.304	-17.411	74.000	31.285	PK
2		2390.000	53.415	22.161	-20.585	74.000	31.254	PK
3		2402.292	98.441	67.183	N/A	N/A	31.258	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz	

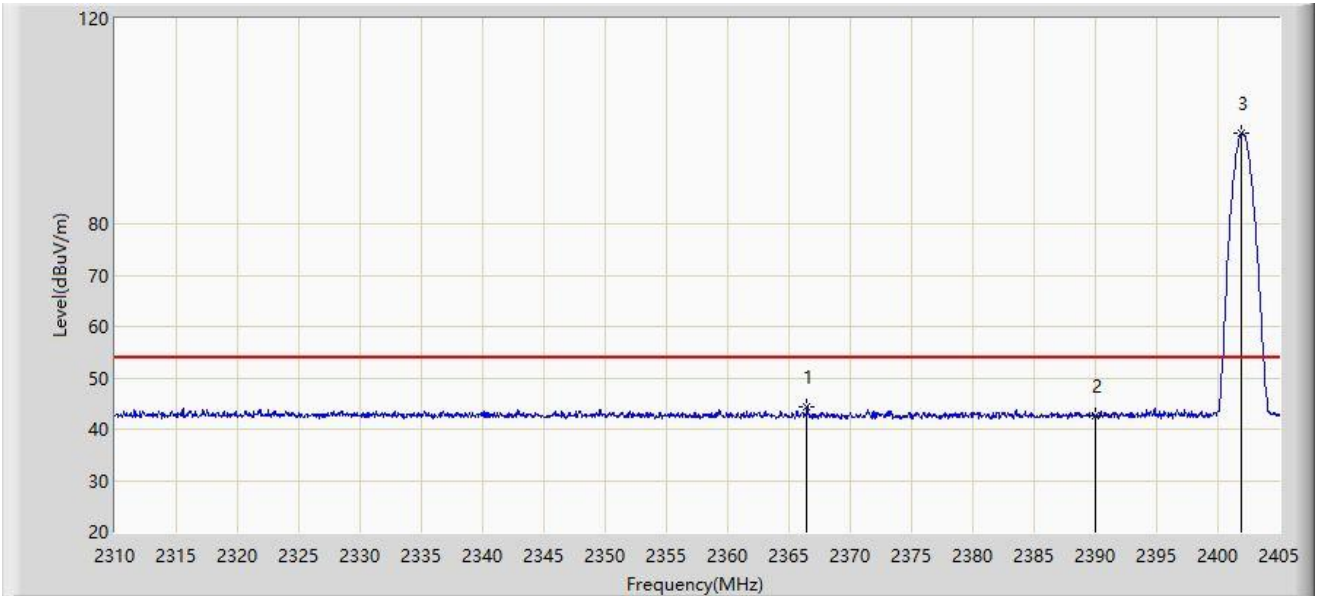


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2366.478	44.377	13.055	-9.623	54.000	31.321	AV
2		2390.000	42.470	11.216	-11.530	54.000	31.254	AV
3		2401.960	97.538	66.280	N/A	N/A	31.258	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2402MHz	

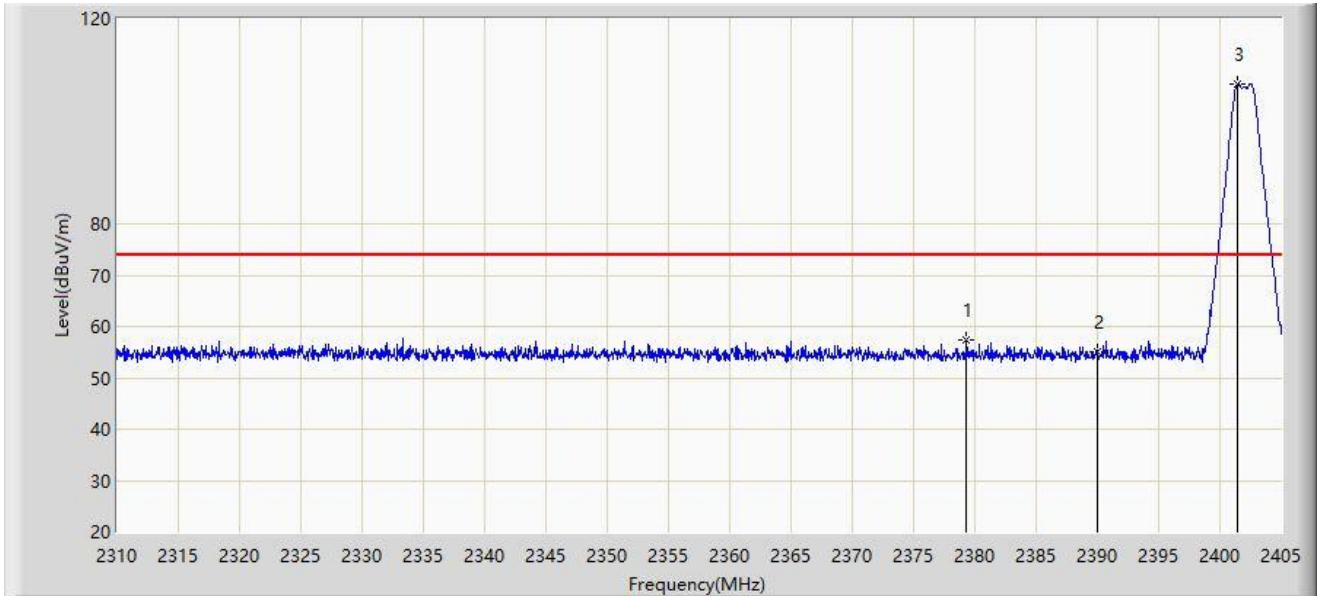


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2379.302	57.377	26.100	-16.623	74.000	31.278	PK
2		2390.000	54.999	23.745	-19.001	74.000	31.254	PK
3		2401.437	107.193	75.935	N/A	N/A	31.258	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2402MHz	

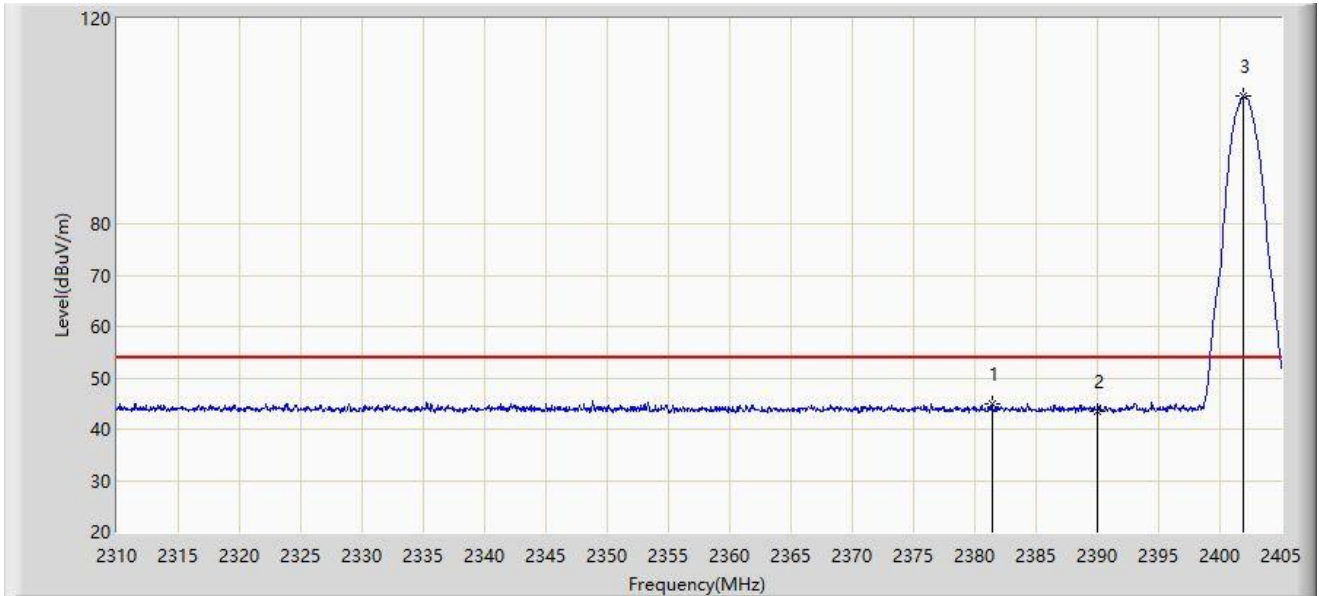


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2381.440	44.844	13.575	-9.156	54.000	31.269	AV
2		2390.000	43.563	12.309	-10.437	54.000	31.254	AV
3		2401.913	104.970	73.712	N/A	N/A	31.258	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2402MHz	

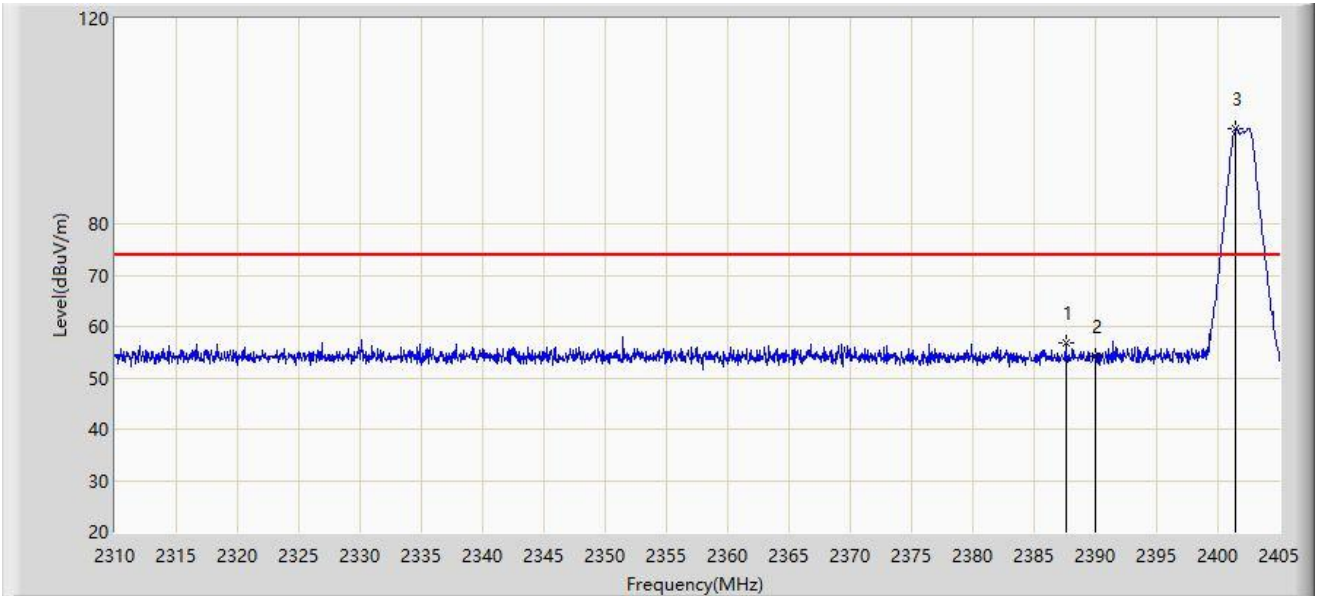


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2387.615	56.688	25.432	-17.312	74.000	31.255	PK
2		2390.000	54.238	22.984	-19.762	74.000	31.254	PK
3		2401.485	98.480	67.222	N/A	N/A	31.258	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2402MHz	

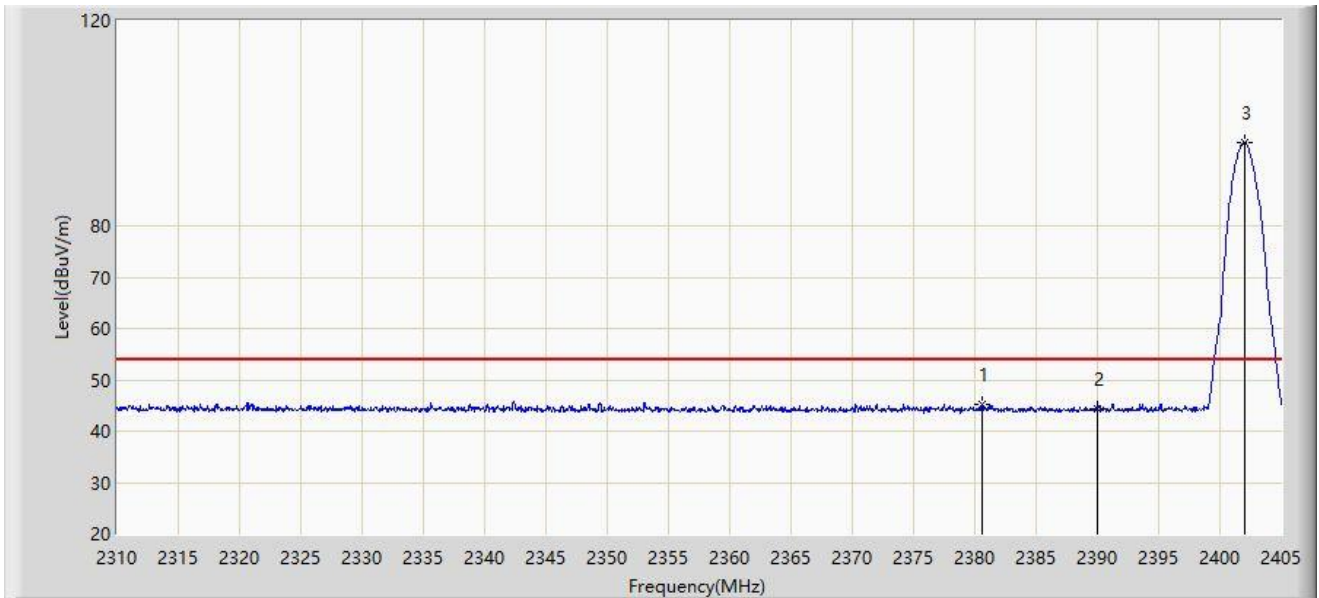

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2380.538	45.163	13.890	-8.837	54.000	31.273	AV
2		2390.000	44.341	13.087	-9.659	54.000	31.254	AV
3		2402.008	96.268	65.010	N/A	N/A	31.258	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Mode 2 – Filter 6#

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2480MHz	

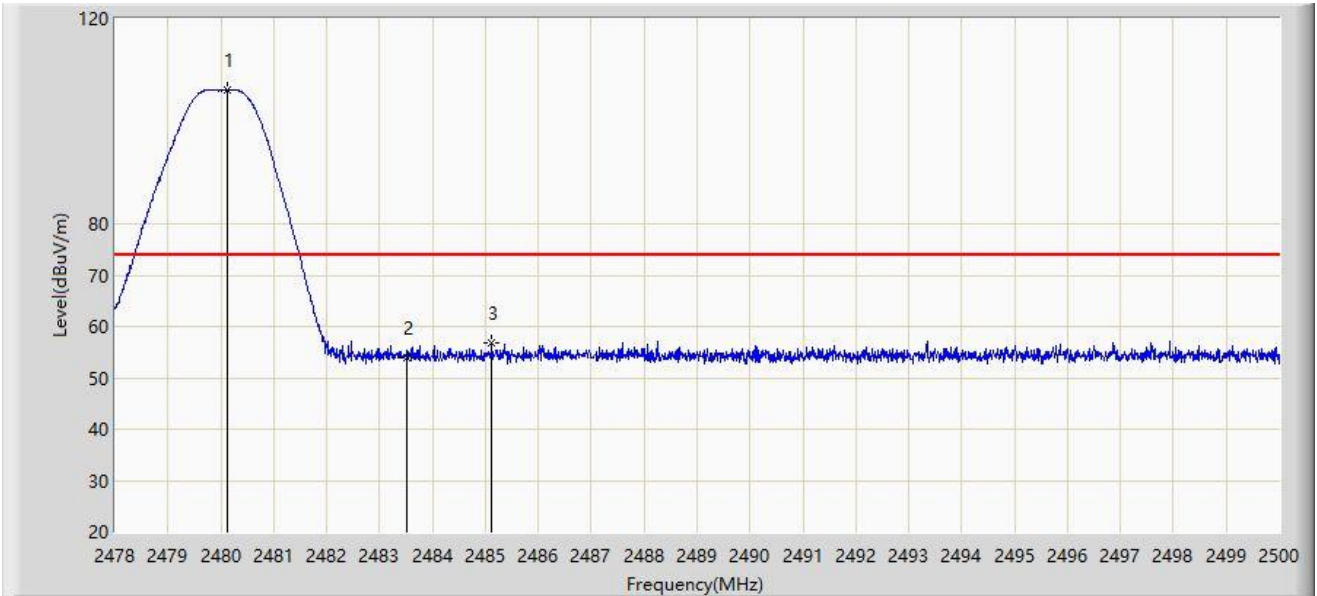


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2480.123	106.199	74.975	N/A	N/A	31.224	PK
2		2483.500	53.982	22.756	-20.018	74.000	31.226	PK
3	*	2485.117	56.918	25.691	-17.082	74.000	31.227	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2480MHz	

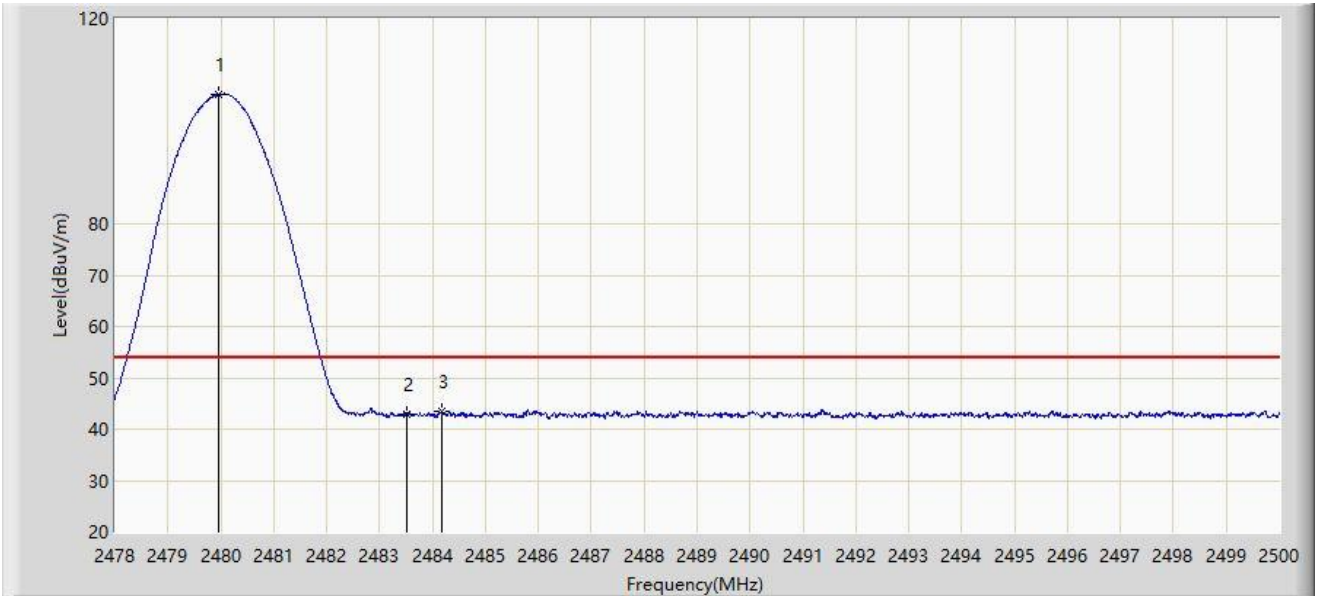


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.969	105.273	74.049	N/A	N/A	31.224	AV
2		2483.500	42.798	11.572	-11.202	54.000	31.226	AV
3	*	2484.171	43.495	12.268	-10.505	54.000	31.227	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2480MHz	

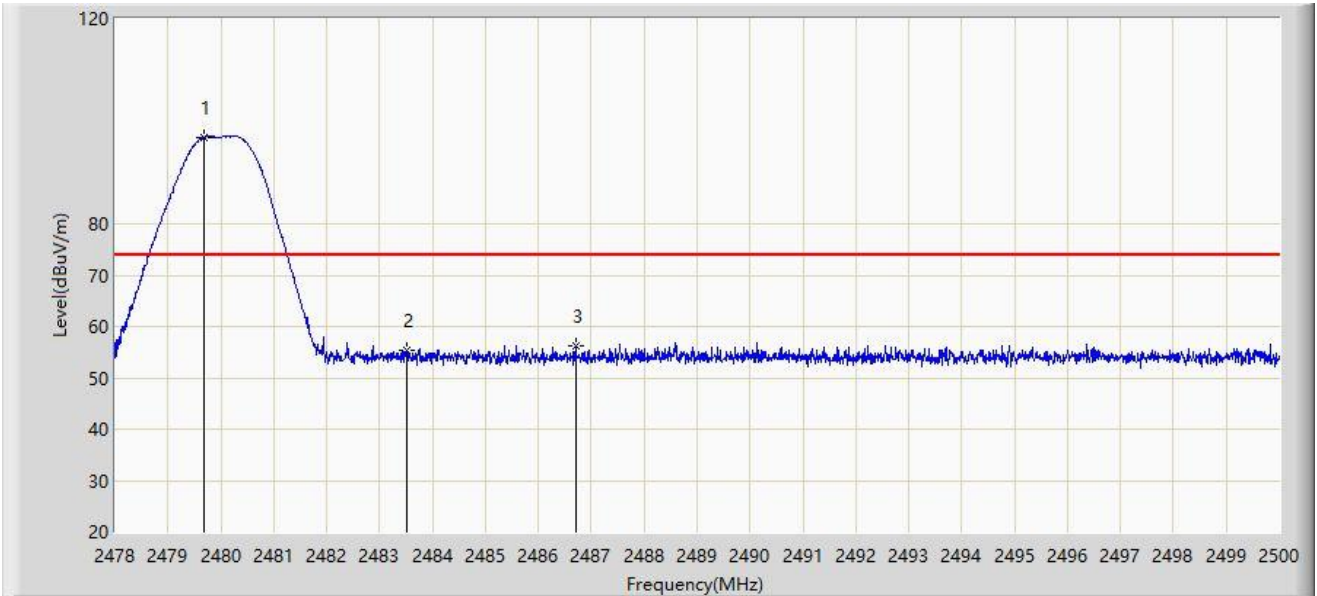


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.672	96.868	65.645	N/A	N/A	31.223	PK
2		2483.500	55.229	24.003	-18.771	74.000	31.226	PK
3	*	2486.701	56.226	24.997	-17.774	74.000	31.229	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2480MHz	

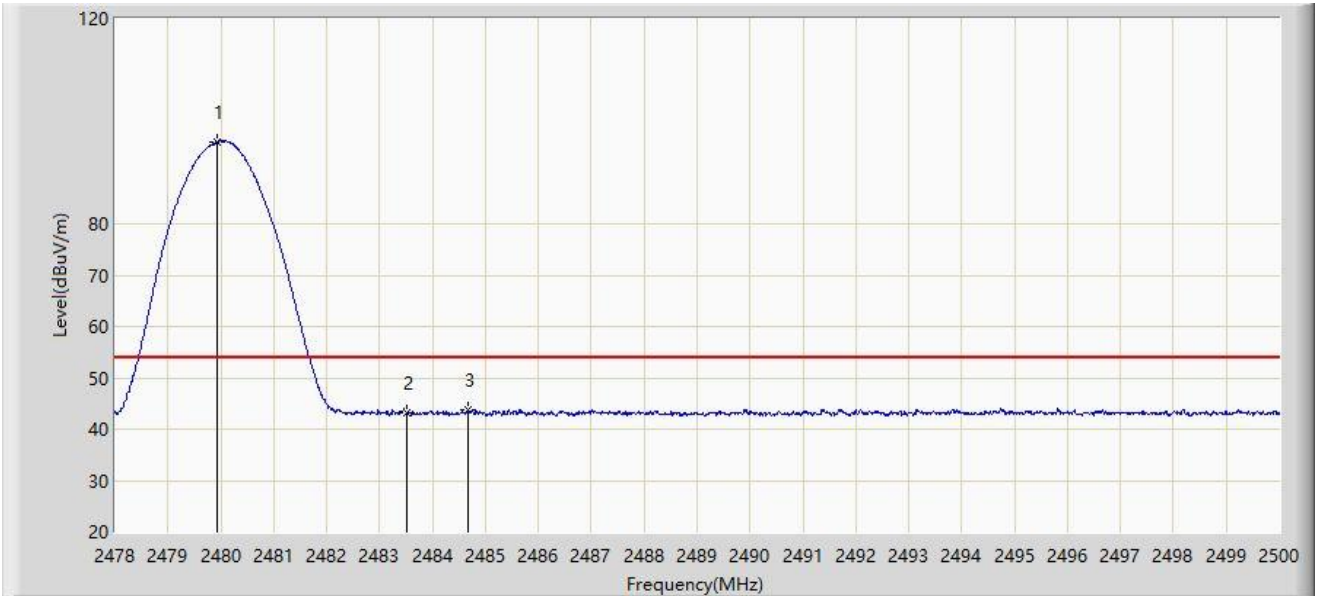


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.925	95.933	64.709	N/A	N/A	31.224	AV
2		2483.500	43.163	11.937	-10.837	54.000	31.226	AV
3	*	2484.666	43.688	12.461	-10.312	54.000	31.227	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2480MHz	

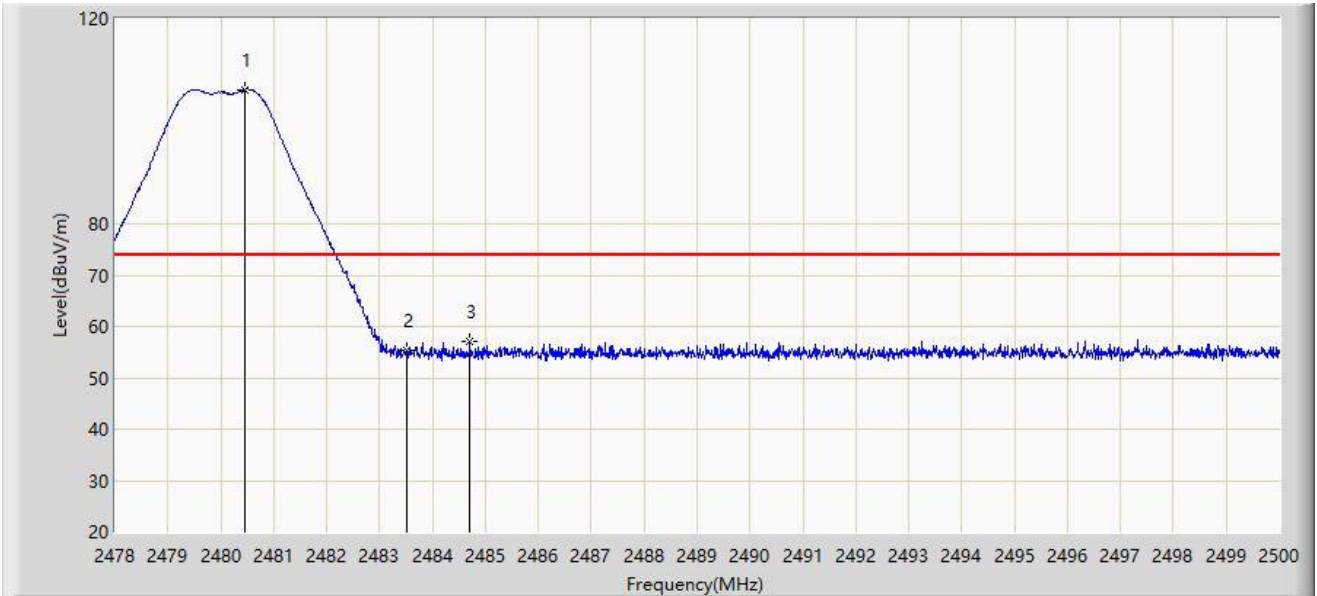


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2480.453	106.217	74.993	N/A	N/A	31.224	PK
2		2483.500	55.242	24.016	-18.758	74.000	31.226	PK
3	*	2484.699	56.990	25.763	-17.010	74.000	31.227	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2480MHz	

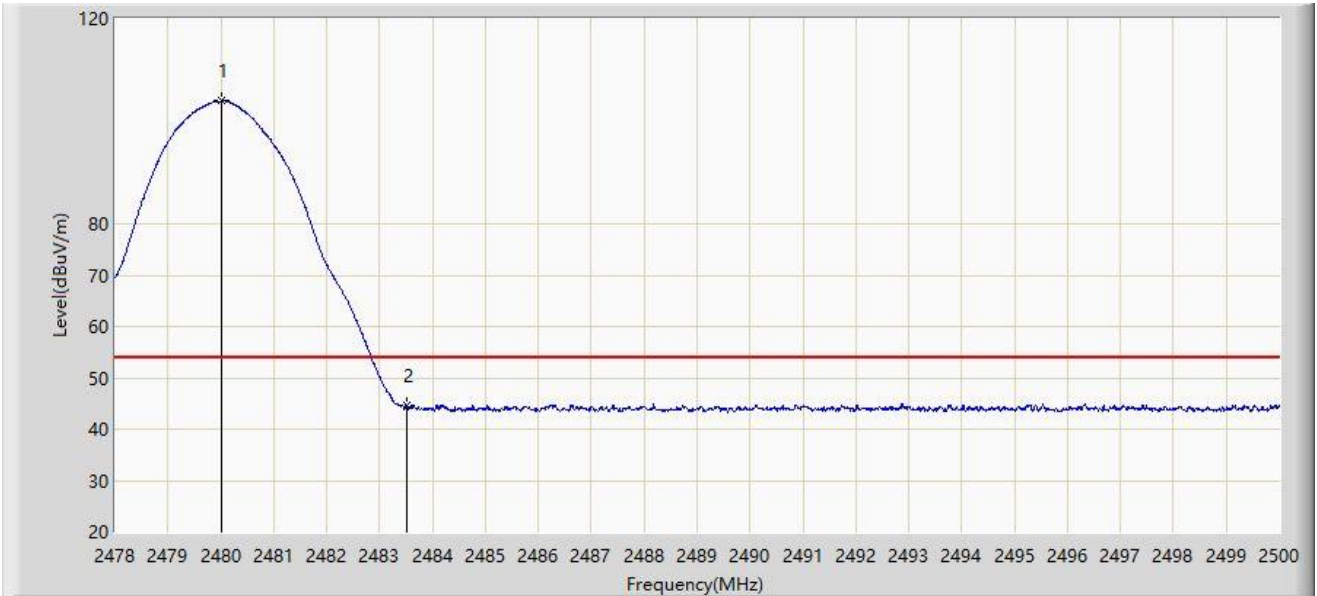


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.013	103.958	72.734	N/A	N/A	31.224	AV
2	*	2483.500	44.654	13.428	-9.346	54.000	31.226	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2480MHz	

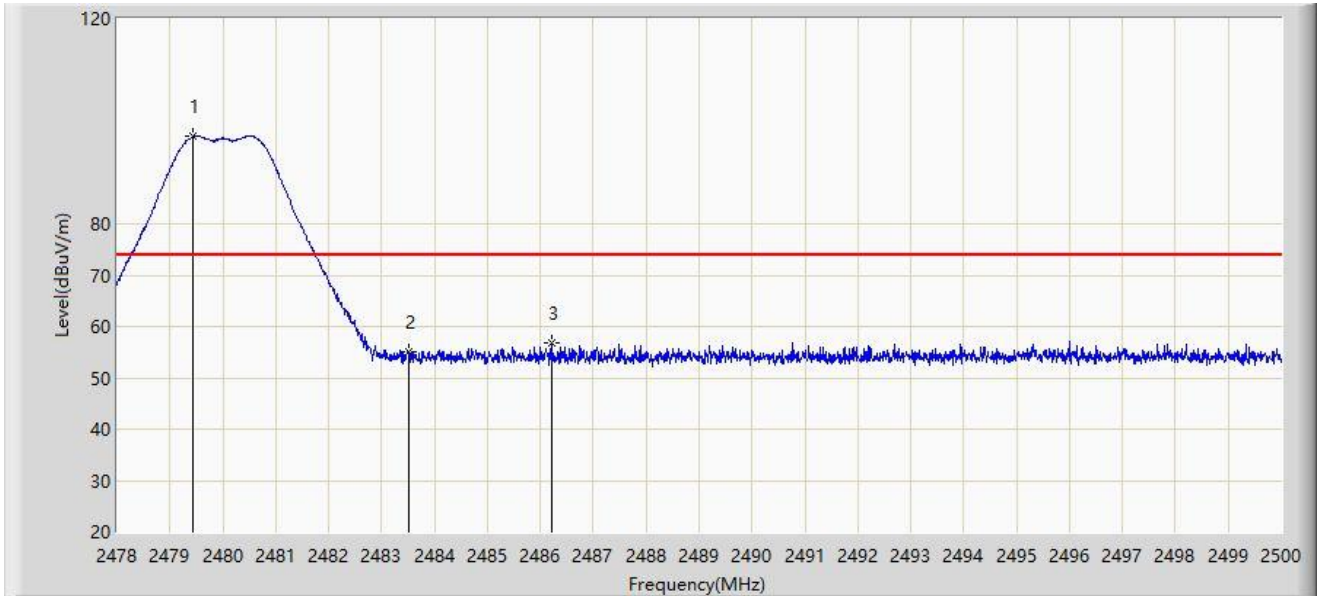


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.441	97.040	65.817	N/A	N/A	31.223	PK
2		2483.500	55.094	23.868	-18.906	74.000	31.226	PK
3	*	2486.228	56.804	25.576	-17.196	74.000	31.228	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2480MHz	

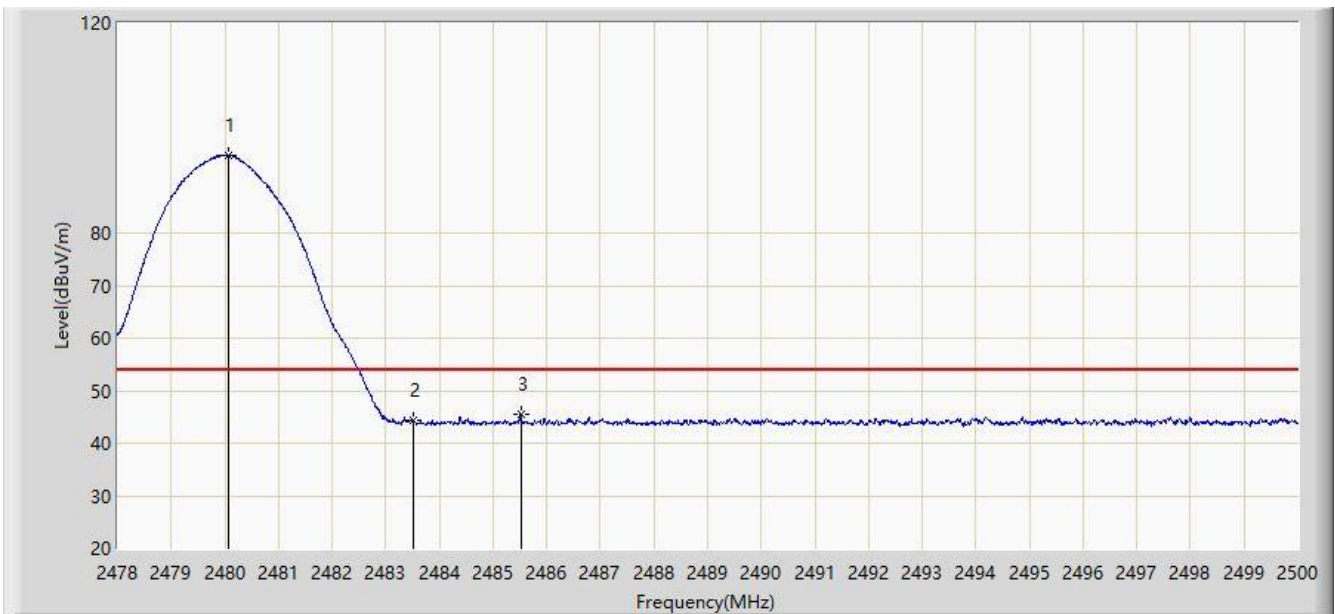

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.079	94.765	63.541	N/A	N/A	31.224	AV
2		2483.500	44.229	13.003	-9.771	54.000	31.226	AV
3	*	2485.513	45.446	14.218	-8.554	54.000	31.228	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Mode 3 – Filter 7#

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz	

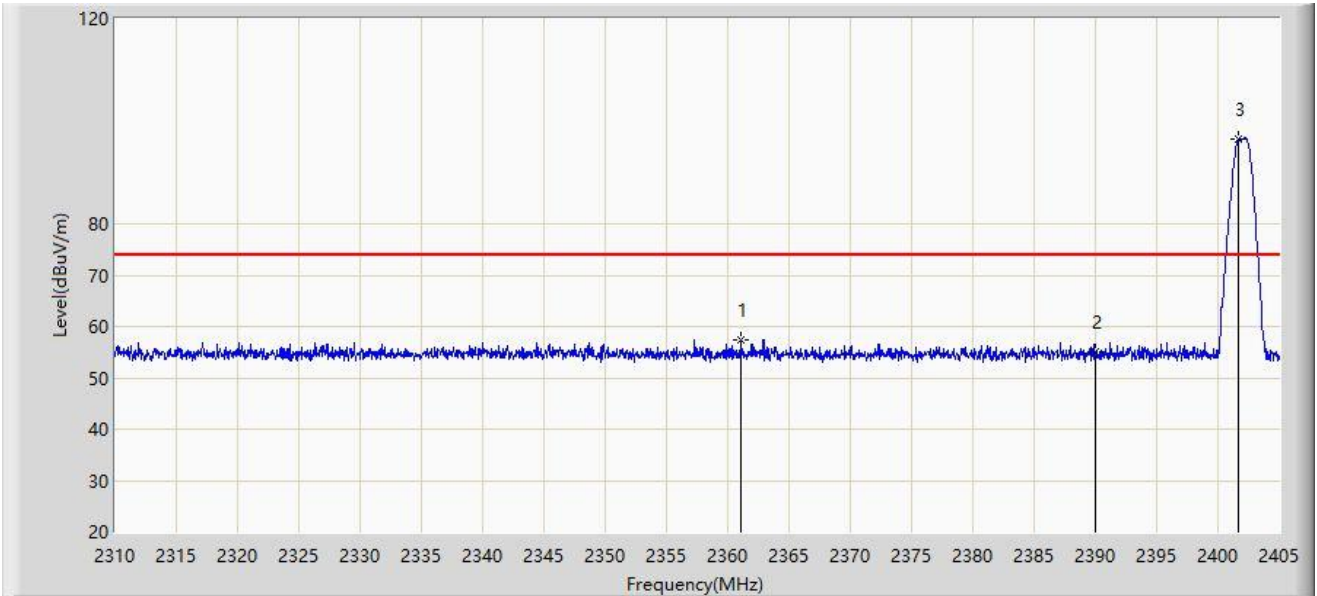


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2361.110	57.467	26.135	-16.533	74.000	31.332	PK
2		2390.000	54.946	23.692	-19.054	74.000	31.254	PK
3		2401.722	96.575	65.317	N/A	N/A	31.258	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz	

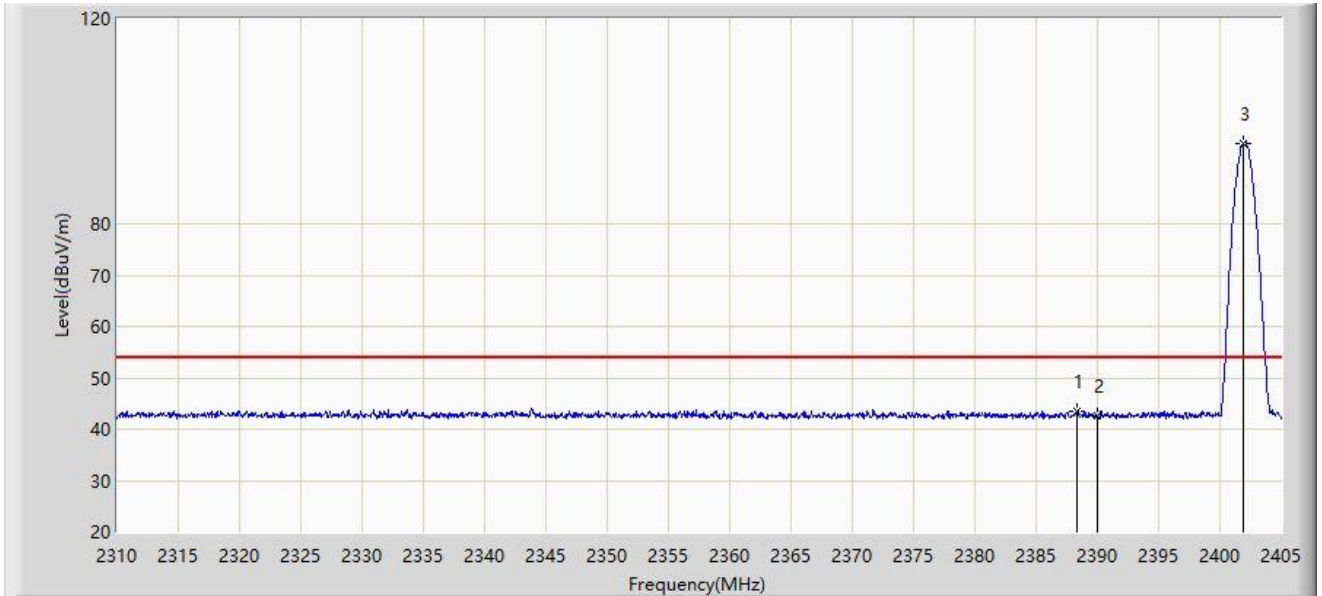


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2388.375	43.609	12.354	-10.391	54.000	31.255	AV
2		2390.000	42.487	11.233	-11.513	54.000	31.254	AV
3		2401.913	95.658	64.400	N/A	N/A	31.258	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz	

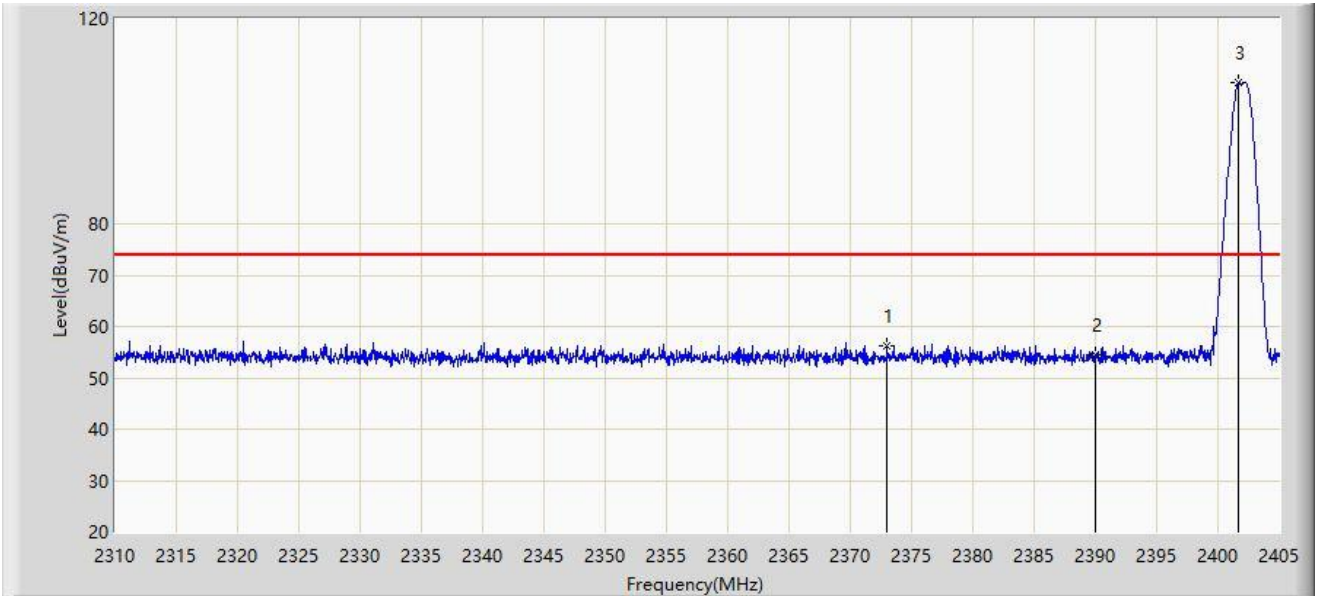


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2373.032	56.278	24.978	-17.722	74.000	31.299	PK
2		2390.000	54.512	23.258	-19.488	74.000	31.254	PK
3		2401.722	107.482	76.224	N/A	N/A	31.258	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2402MHz	

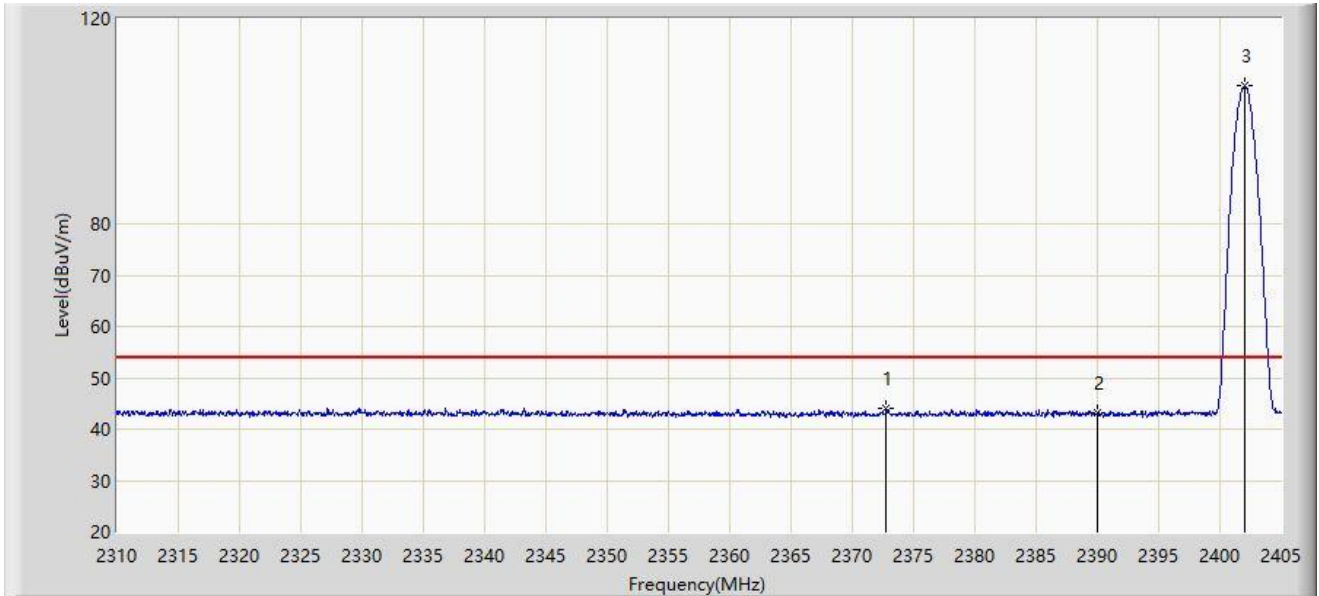


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2372.795	43.919	12.618	-10.081	54.000	31.301	AV
2		2390.000	43.053	11.799	-10.947	54.000	31.254	AV
3		2402.055	106.848	75.590	N/A	N/A	31.258	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2480MHz	

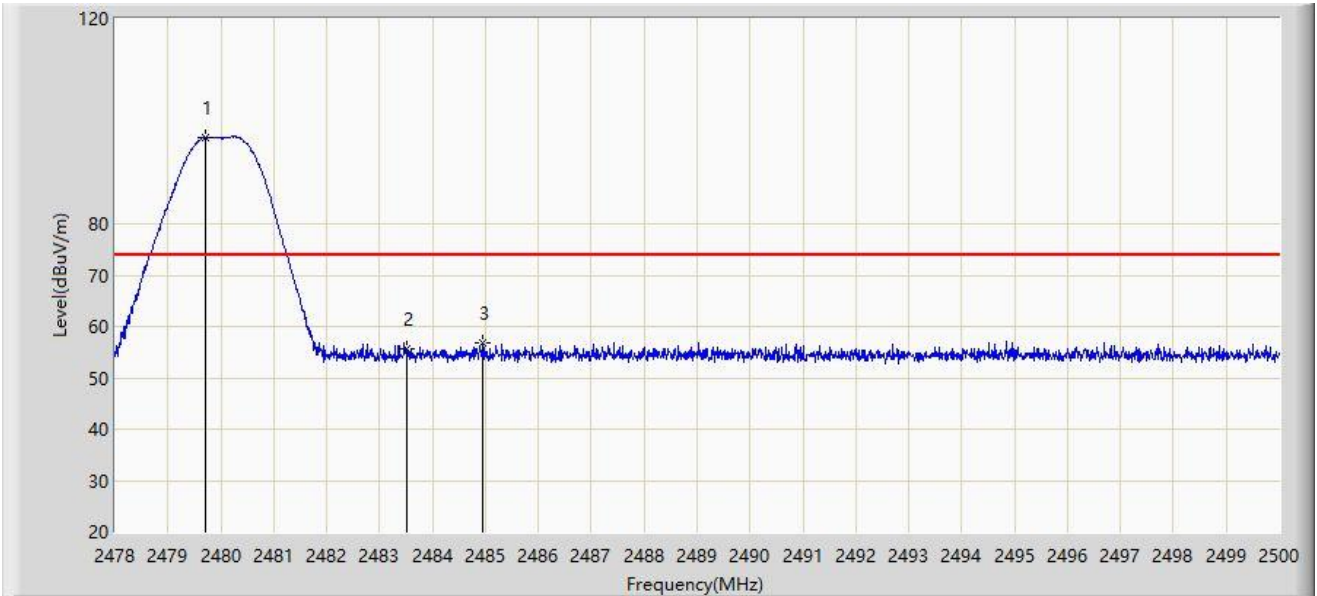


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.705	96.867	65.644	N/A	N/A	31.223	PK
2		2483.500	55.597	24.371	-18.403	74.000	31.226	PK
3	*	2484.941	56.868	25.641	-17.132	74.000	31.227	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2480MHz	

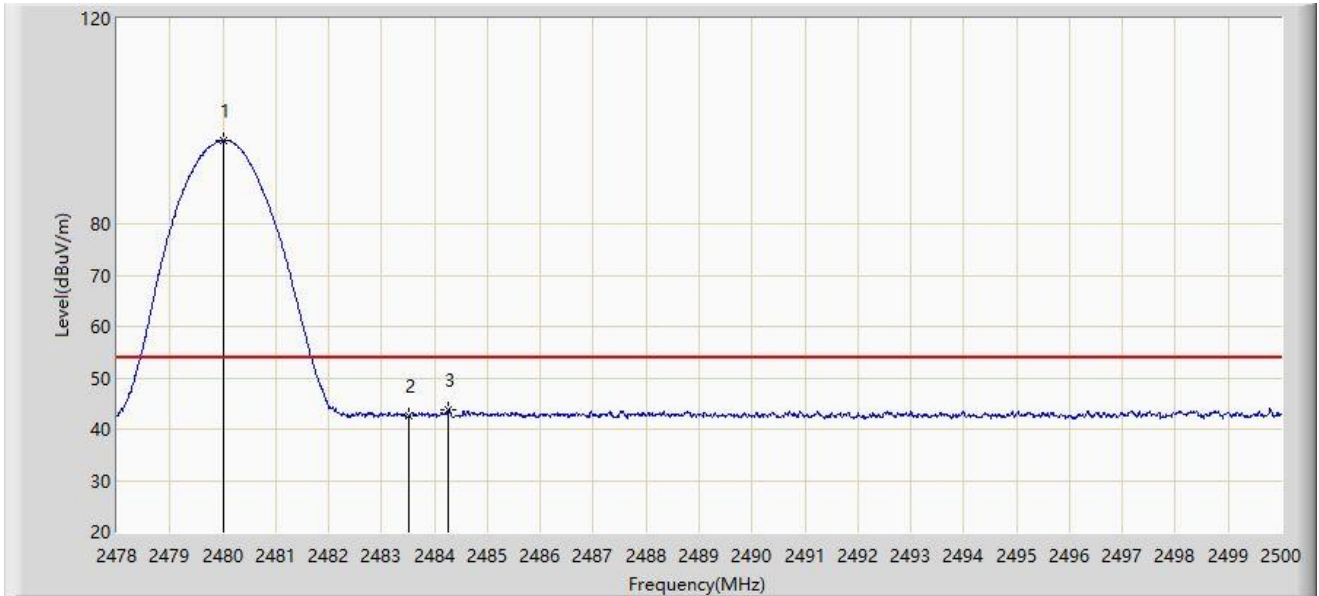


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2480.013	96.247	65.023	N/A	N/A	31.224	AV
2		2483.500	42.552	11.326	-11.448	54.000	31.226	AV
3	*	2484.259	43.706	12.479	-10.294	54.000	31.227	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2480MHz	

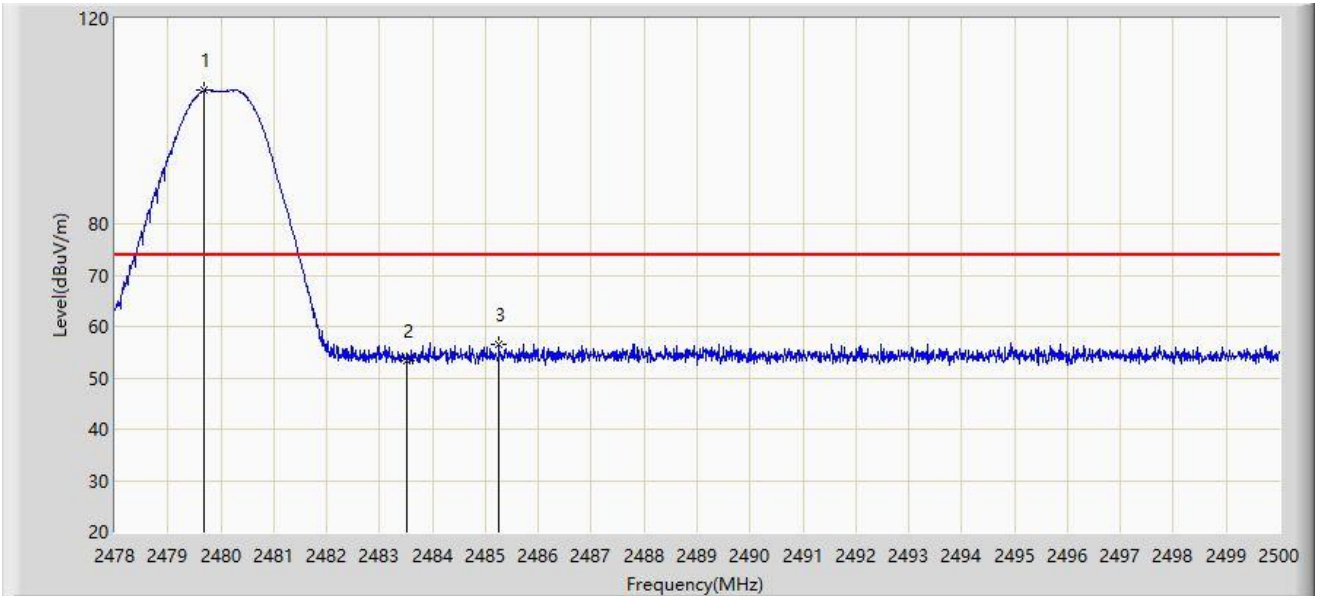


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2479.694	105.955	74.732	N/A	N/A	31.223	PK
2		2483.500	53.444	22.218	-20.556	74.000	31.226	PK
3	*	2485.260	56.623	25.395	-17.377	74.000	31.228	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 1M at 2480MHz	

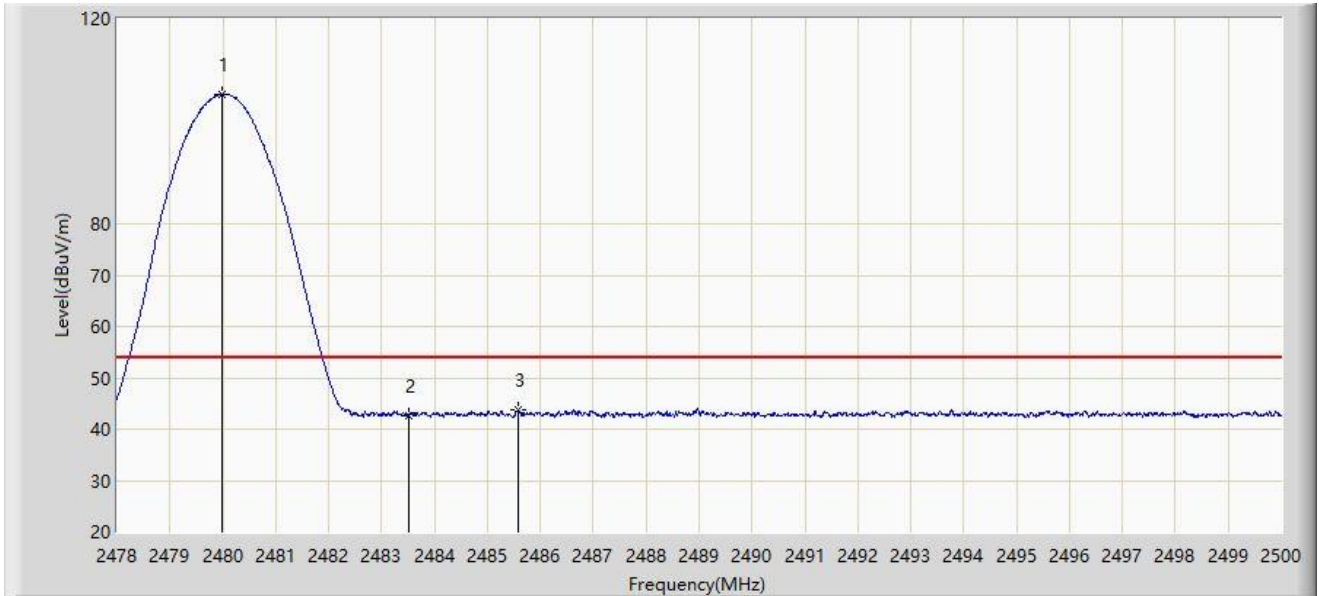


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2479.980	105.253	74.029	N/A	N/A	31.224	AV
2		2483.500	42.672	11.446	-11.328	54.000	31.226	AV
3	*	2485.579	43.658	12.430	-10.342	54.000	31.228	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2402MHz	

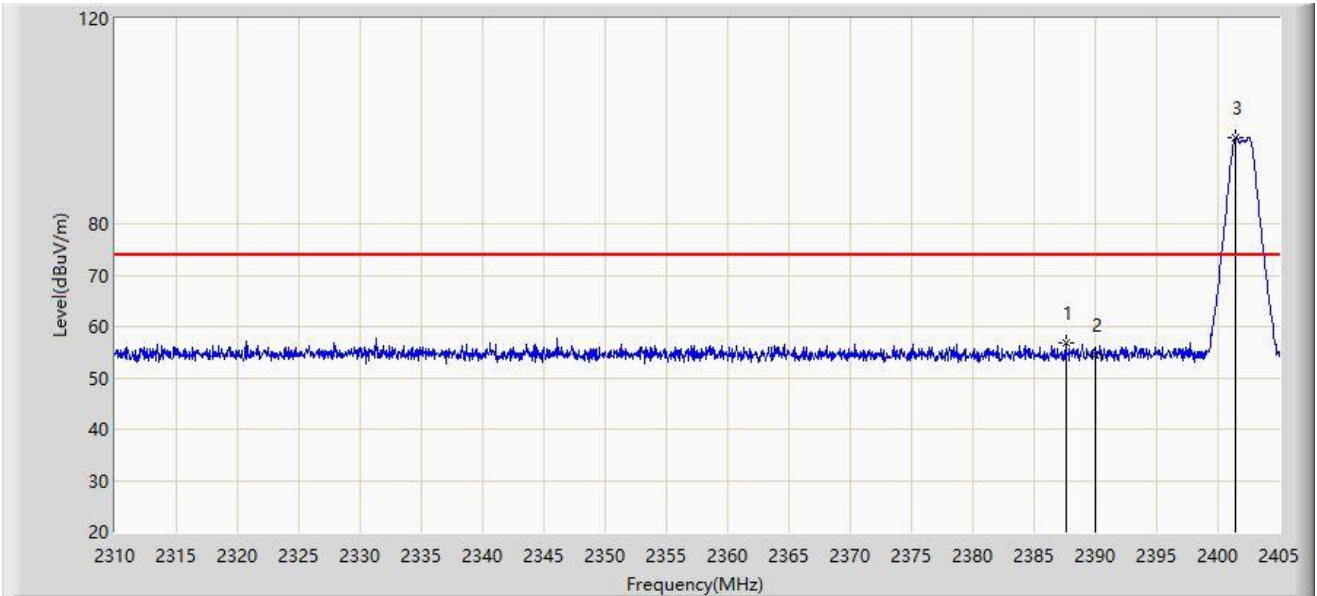


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2387.567	56.762	25.506	-17.238	74.000	31.255	PK
2		2390.000	54.370	23.116	-19.630	74.000	31.254	PK
3		2401.485	96.677	65.419	N/A	N/A	31.258	PK
4		2485.579	43.658	12.430	-30.342	74.000	31.228	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2402MHz	

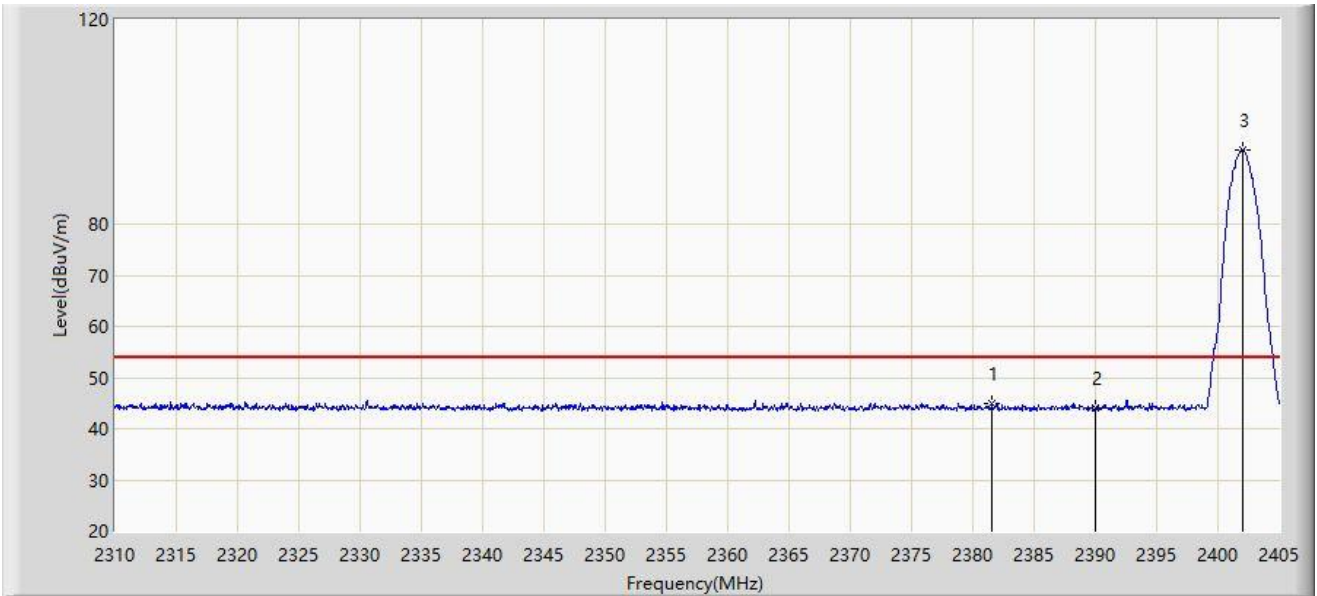


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2381.583	44.881	13.613	-9.119	54.000	31.268	AV
2		2390.000	44.096	12.842	-9.904	54.000	31.254	AV
3		2402.008	94.570	63.312	N/A	N/A	31.258	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC1	Test Date: 2024-01-24
Limit: FCC_2.4G_RE(3m)	Engineer: Carl Jiang
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE 2M at 2402MHz	

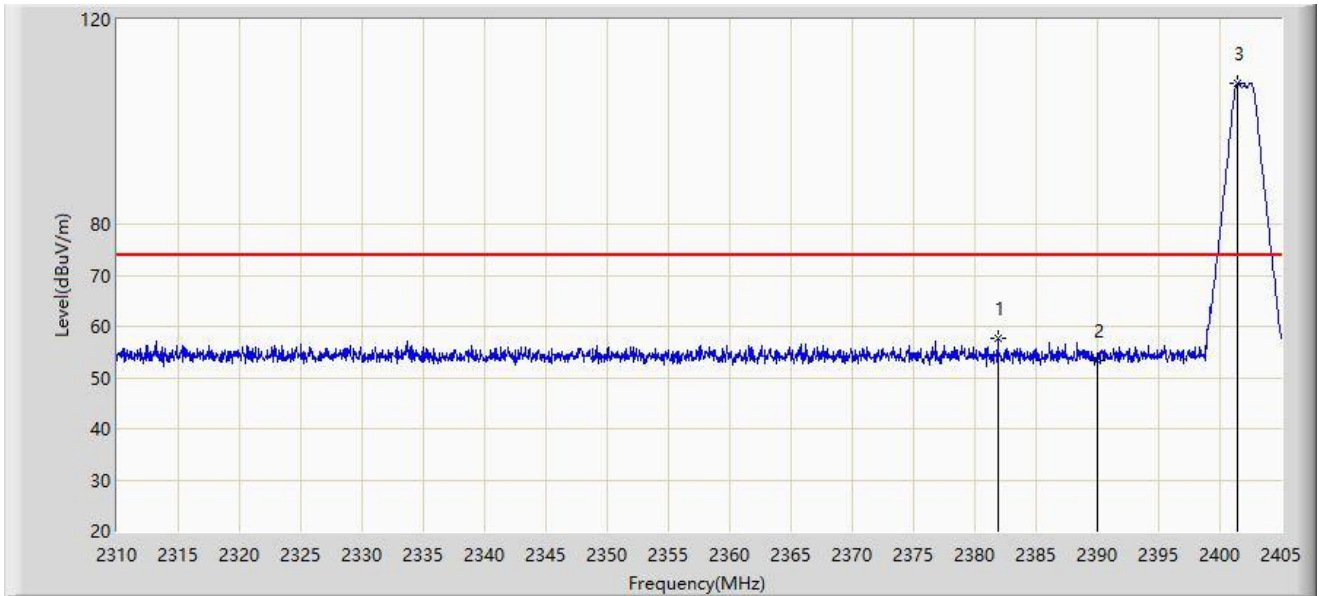

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2381.867	57.631	26.364	-16.369	74.000	31.268	PK
2		2390.000	53.353	22.099	-20.647	74.000	31.254	PK
3		2401.437	107.569	76.311	N/A	N/A	31.258	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).