



802.11be-EHT40 Out-of-Band Emissions

Channel 03 (2422MHz)


Reference Level

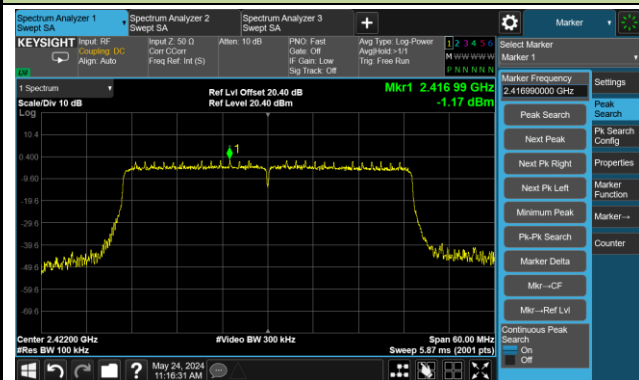

Low Band Edge

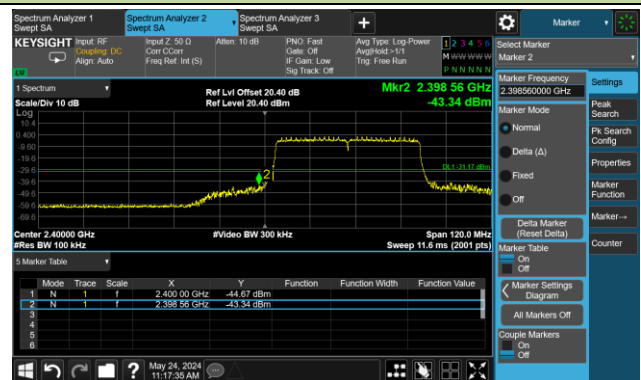

Spurious Emission

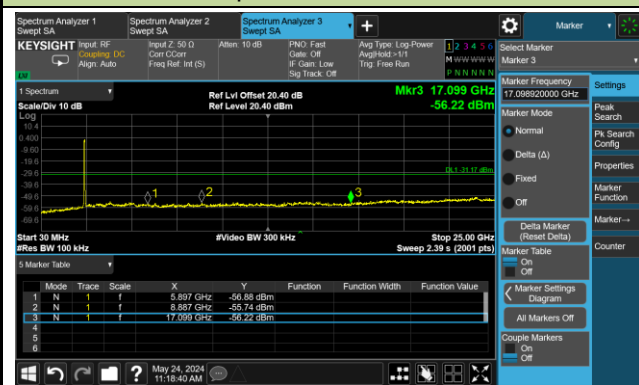


Channel 06 (2437MHz)

Reference Level




Spurious Emission

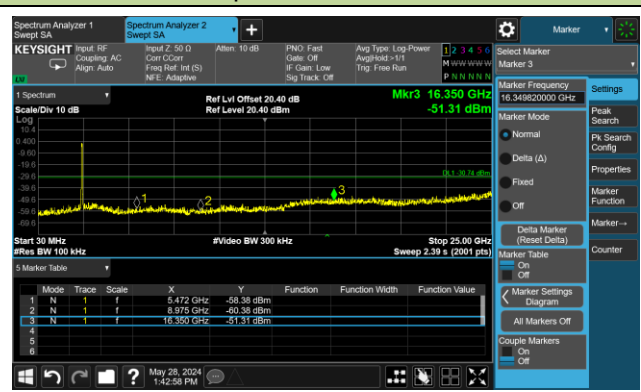


802.11be-EHT40 Out-of-Band Emissions

Channel 09 (2452MHz)


Reference Level

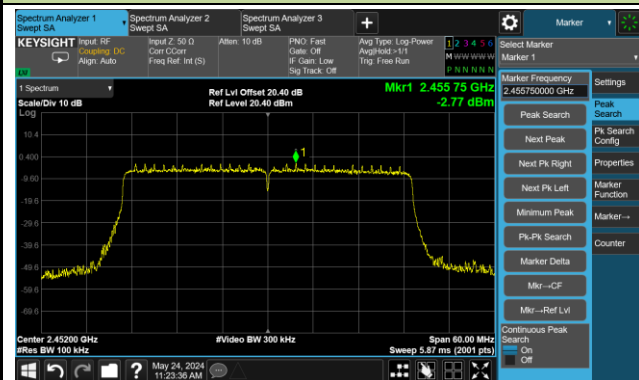

High Band Edge

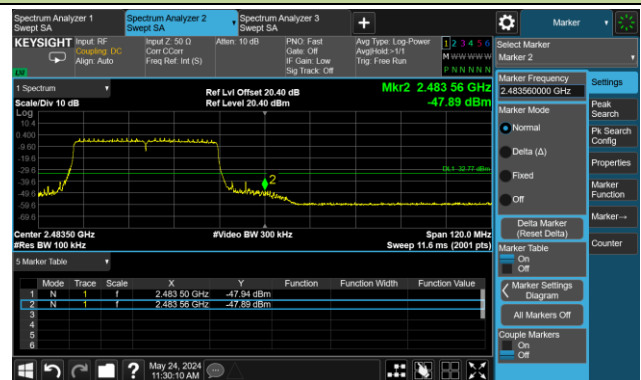

Spurious Emission

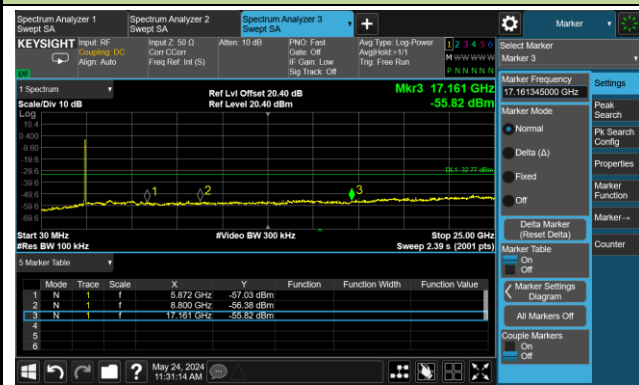

A.6 Radiated Spurious Emission Test Result

Ant_311

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-05-23	Test Mode	802.11b
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	5071.500	35.4	3.9	39.3	74.0	-34.7	Peak	Horizontal
	8174.000	33.1	11.1	44.2	74.0	-29.8	Peak	Horizontal
	11786.500	30.4	17.3	47.7	74.0	-26.3	Peak	Horizontal
	3966.500	35.9	0.4	36.3	74.0	-37.7	Peak	Vertical
	4748.500	34.0	3.5	37.5	74.0	-36.5	Peak	Vertical
	11540.000	31.7	17.3	49.0	74.0	-25.0	Peak	Vertical
06	4111.000	35.4	1.1	36.5	74.0	-37.5	Peak	Horizontal
	8089.000	32.2	11.2	43.4	74.0	-30.6	Peak	Horizontal
	11293.500	30.9	16.7	47.6	74.0	-26.4	Peak	Horizontal
	4961.000	34.6	3.4	38.0	74.0	-36.0	Peak	Vertical
	7315.500	32.3	10.9	43.2	74.0	-30.8	Peak	Vertical
	11072.500	29.9	16.4	46.3	74.0	-27.7	Peak	Vertical
11	3907.000	36.7	0.2	36.9	74.0	-37.1	Peak	Horizontal
	7502.500	30.4	11.2	41.6	74.0	-32.4	Peak	Horizontal
	10953.500	32.4	15.9	48.3	74.0	-25.7	Peak	Horizontal
	4901.500	34.8	3.5	38.3	74.0	-35.7	Peak	Vertical
	7434.500	32.2	11.4	43.6	74.0	-30.4	Peak	Vertical
	11489.000	31.3	17.5	48.8	74.0	-25.2	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-05-23	Test Mode	802.11g
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4842.000	34.5	3.6	38.1	74.0	-35.9	Peak	Horizontal
	7604.500	32.0	10.9	42.9	74.0	-31.1	Peak	Horizontal
	11055.500	32.0	16.1	48.1	74.0	-25.9	Peak	Horizontal
	4663.500	34.6	3.3	37.9	74.0	-36.1	Peak	Vertical
	7502.500	32.2	11.2	43.4	74.0	-30.6	Peak	Vertical
	11344.500	31.2	17.2	48.4	74.0	-25.6	Peak	Vertical
06	4816.500	33.4	3.7	37.1	74.0	-36.9	Peak	Horizontal
	7570.500	31.2	11.1	42.3	74.0	-31.7	Peak	Horizontal
	11506.000	32.1	17.3	49.4	74.0	-24.6	Peak	Horizontal
	5071.500	34.5	3.9	38.4	74.0	-35.6	Peak	Vertical
	7451.500	31.9	11.5	43.4	74.0	-30.6	Peak	Vertical
	11472.000	31.3	17.4	48.7	74.0	-25.3	Peak	Vertical
11	4825.000	35.5	3.6	39.1	74.0	-34.9	Peak	Horizontal
	7417.500	31.7	11.3	43.0	74.0	-31.0	Peak	Horizontal
	11472.000	31.0	17.4	48.4	74.0	-25.6	Peak	Horizontal
	4765.500	34.0	3.6	37.6	74.0	-36.4	Peak	Vertical
	7460.000	31.5	11.5	43.0	74.0	-31.0	Peak	Vertical
	11718.500	30.8	17.5	48.3	74.0	-25.7	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-05-23	Test Mode	802.11n-HT20
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4196.000	35.6	1.4	37.0	74.0	-37.0	Peak	Horizontal
	7545.000	32.2	11.5	43.7	74.0	-30.3	Peak	Horizontal
	11455.000	31.4	17.2	48.6	74.0	-25.4	Peak	Horizontal
	4697.500	33.9	3.5	37.4	74.0	-36.6	Peak	Vertical
	7562.000	31.7	11.3	43.0	74.0	-31.0	Peak	Vertical
	11548.500	30.6	17.3	47.9	74.0	-26.1	Peak	Vertical
06	4119.500	35.6	1.1	36.7	74.0	-37.3	Peak	Horizontal
	7468.500	32.3	11.5	43.8	74.0	-30.2	Peak	Horizontal
	11378.500	30.8	17.2	48.0	74.0	-26.0	Peak	Horizontal
	4748.500	34.4	3.5	37.9	74.0	-36.1	Peak	Vertical
	7477.000	31.3	11.4	42.7	74.0	-31.3	Peak	Vertical
	11497.500	30.8	17.4	48.2	74.0	-25.8	Peak	Vertical
11	4196.000	35.9	1.4	37.3	74.0	-36.7	Peak	Horizontal
	7553.500	32.5	11.4	43.9	74.0	-30.1	Peak	Horizontal
	11710.000	30.8	17.5	48.3	74.0	-25.7	Peak	Horizontal
	7443.000	32.3	11.4	43.7	74.0	-30.3	Peak	Vertical
	11489.000	30.9	17.5	48.4	74.0	-25.6	Peak	Vertical
	12347.500	31.3	16.9	48.2	74.0	-25.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-05-23	Test Mode	802.11n-HT40
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	4816.500	35.5	3.7	39.2	74.0	-34.8	Peak	Horizontal
	7400.500	30.6	11.2	41.8	74.0	-32.2	Peak	Horizontal
	11327.500	29.2	17.3	46.5	74.0	-27.5	Peak	Horizontal
	3907.000	36.9	0.2	37.1	74.0	-36.9	Peak	Vertical
	8114.500	33.2	11.4	44.6	74.0	-29.4	Peak	Vertical
	11650.500	31.1	17.6	48.7	74.0	-25.3	Peak	Vertical
06	5029.000	34.4	3.9	38.3	74.0	-35.7	Peak	Horizontal
	7689.500	32.5	10.9	43.4	74.0	-30.6	Peak	Horizontal
	11072.500	32.8	16.4	49.2	74.0	-24.8	Peak	Horizontal
	4808.000	35.6	3.7	39.3	74.0	-34.7	Peak	Vertical
	7341.000	34.5	10.8	45.3	74.0	-28.7	Peak	Vertical
	11650.500	31.5	17.6	49.1	74.0	-24.9	Peak	Vertical
09	7281.500	32.2	11.1	43.3	74.0	-30.7	Peak	Horizontal
	11557.000	31.1	17.4	48.5	74.0	-25.5	Peak	Horizontal
	12364.500	31.2	16.9	48.1	74.0	-25.9	Peak	Horizontal
	7383.500	32.0	11.2	43.2	74.0	-30.8	Peak	Vertical
	11523.000	31.2	17.1	48.3	74.0	-25.7	Peak	Vertical
	12364.500	30.8	16.9	47.7	74.0	-26.3	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-05-23	Test Mode	802.11ax-HE20
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	7468.500	31.8	11.5	43.3	74.0	-30.7	Peak	Horizontal
	11166.000	30.2	16.9	47.1	74.0	-26.9	Peak	Horizontal
	11871.500	31.1	17.0	48.1	74.0	-25.9	Peak	Horizontal
	7494.000	31.8	11.2	43.0	74.0	-31.0	Peak	Vertical
	11514.500	31.3	17.2	48.5	74.0	-25.5	Peak	Vertical
	12194.500	30.7	17.3	48.0	74.0	-26.0	Peak	Vertical
06	7706.500	32.2	10.7	42.9	74.0	-31.1	Peak	Horizontal
	11004.500	31.3	16.5	47.8	74.0	-26.2	Peak	Horizontal
	11446.500	30.8	17.1	47.9	74.0	-26.1	Peak	Horizontal
	7443.000	32.4	11.4	43.8	74.0	-30.2	Peak	Vertical
	11081.000	32.1	16.7	48.8	74.0	-25.2	Peak	Vertical
	12211.500	30.8	17.3	48.1	74.0	-25.9	Peak	Vertical
11	7528.000	32.1	11.4	43.5	74.0	-30.5	Peak	Horizontal
	11055.500	30.9	16.1	47.0	74.0	-27.0	Peak	Horizontal
	11871.500	30.9	17.0	47.9	74.0	-26.1	Peak	Horizontal
	7443.000	32.7	11.4	44.1	74.0	-29.9	Peak	Vertical
	11268.000	30.8	16.9	47.7	74.0	-26.3	Peak	Vertical
	11735.500	30.7	17.4	48.1	74.0	-25.9	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-05-23	Test Mode	802.11ax-HE40
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	7434.500	32.3	11.4	43.7	74.0	-30.3	Peak	Horizontal
	10877.000	31.9	16.0	47.9	74.0	-26.1	Peak	Horizontal
	11803.500	30.9	17.5	48.4	74.0	-25.6	Peak	Horizontal
	7570.500	31.6	11.1	42.7	74.0	-31.3	Peak	Vertical
	11310.500	30.7	17.1	47.8	74.0	-26.2	Peak	Vertical
	11897.000	31.2	17.1	48.3	74.0	-25.7	Peak	Vertical
06	7536.500	31.7	11.4	43.1	74.0	-30.9	Peak	Horizontal
	11072.500	31.8	16.4	48.2	74.0	-25.8	Peak	Horizontal
	12135.000	30.9	17.0	47.9	74.0	-26.1	Peak	Horizontal
	7681.000	32.8	10.8	43.6	74.0	-30.4	Peak	Vertical
	10996.000	32.4	16.5	48.9	74.0	-25.1	Peak	Vertical
	11727.000	31.4	17.5	48.9	74.0	-25.1	Peak	Vertical
09	7494.000	32.6	11.2	43.8	74.0	-30.2	Peak	Horizontal
	10843.000	31.6	16.1	47.7	74.0	-26.3	Peak	Horizontal
	11582.500	31.5	17.2	48.7	74.0	-25.3	Peak	Horizontal
	7723.500	32.9	10.6	43.5	74.0	-30.5	Peak	Vertical
	11480.500	31.5	17.4	48.9	74.0	-25.1	Peak	Vertical
	12143.500	31.4	16.9	48.3	74.0	-25.7	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-05-23	Test Mode	802.11be-EHT20
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4833.500	34.5	3.6	38.1	74.0	-35.9	Peak	Horizontal
	11489.000	30.3	17.5	47.8	74.0	-26.2	Peak	Horizontal
	12075.500	31.4	16.9	48.3	74.0	-25.7	Peak	Horizontal
	4825.000	35.4	3.6	39.0	74.0	-35.0	Peak	Vertical
	11446.500	32.2	17.1	49.3	74.0	-24.7	Peak	Vertical
	12339.000	31.0	16.9	47.9	74.0	-26.1	Peak	Vertical
06	7451.500	31.5	11.5	43.0	74.0	-31.0	Peak	Horizontal
	11089.500	30.7	16.7	47.4	74.0	-26.6	Peak	Horizontal
	12109.500	30.3	17.2	47.5	74.0	-26.5	Peak	Horizontal
	7426.000	33.2	11.3	44.5	74.0	-29.5	Peak	Vertical
	11183.000	31.1	16.9	48.0	74.0	-26.0	Peak	Vertical
	11693.000	30.5	17.3	47.8	74.0	-26.2	Peak	Vertical
11	7485.500	31.7	11.3	43.0	74.0	-31.0	Peak	Horizontal
	11064.000	31.6	16.2	47.8	74.0	-26.2	Peak	Horizontal
	12262.500	31.3	17.0	48.3	74.0	-25.7	Peak	Horizontal
	7528.000	31.1	11.4	42.5	74.0	-31.5	Peak	Vertical
	11157.500	31.7	16.7	48.4	74.0	-25.6	Peak	Vertical
	11642.000	30.7	17.6	48.3	74.0	-25.7	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-05-23	Test Mode	802.11be-EHT40
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	7358.000	32.1	10.9	43.0	74.0	-31.0	Peak	Horizontal
	11276.500	31.3	16.8	48.1	74.0	-25.9	Peak	Horizontal
	12194.500	31.1	17.3	48.4	74.0	-25.6	Peak	Horizontal
	7281.500	32.2	11.1	43.3	74.0	-30.7	Peak	Vertical
	11098.000	30.9	16.7	47.6	74.0	-26.4	Peak	Vertical
	12339.000	31.1	16.9	48.0	74.0	-26.0	Peak	Vertical
06	7596.000	32.4	10.9	43.3	74.0	-30.7	Peak	Horizontal
	11310.500	30.8	17.1	47.9	74.0	-26.1	Peak	Horizontal
	12288.000	30.9	17.0	47.9	74.0	-26.1	Peak	Horizontal
	7341.000	32.9	10.8	43.7	74.0	-30.3	Peak	Vertical
	11089.500	31.6	16.7	48.3	74.0	-25.7	Peak	Vertical
	12279.500	31.3	17.0	48.3	74.0	-25.7	Peak	Vertical
09	7477.000	31.8	11.4	43.2	74.0	-30.8	Peak	Horizontal
	11395.500	31.2	17.3	48.5	74.0	-25.5	Peak	Horizontal
	12211.500	30.9	17.3	48.2	74.0	-25.8	Peak	Horizontal
	7366.500	32.6	11.0	43.6	74.0	-30.4	Peak	Vertical
	11506.000	30.7	17.3	48.0	74.0	-26.0	Peak	Vertical
	12101.000	30.7	17.1	47.8	74.0	-26.2	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Ant_340

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-05-23 ~ 2024-05-25	Test Mode	802.11b
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	3873.000	36.4	0.3	36.7	74.0	-37.3	Peak	Horizontal
	7468.500	31.6	11.5	43.1	74.0	-30.9	Peak	Horizontal
	11633.500	31.1	17.4	48.5	74.0	-25.5	Peak	Horizontal
	4825.000	35.4	3.6	39.0	74.0	-35.0	Peak	Vertical
	7553.500	31.7	11.4	43.1	74.0	-30.9	Peak	Vertical
	11744.000	31.5	17.2	48.7	74.0	-25.3	Peak	Vertical
06	4816.500	35.0	3.7	38.7	74.0	-35.3	Peak	Horizontal
	7502.500	32.4	11.2	43.6	74.0	-30.4	Peak	Horizontal
	11531.500	29.7	17.3	47.0	74.0	-27.0	Peak	Horizontal
	4825.000	34.4	3.6	38.0	74.0	-36.0	Peak	Vertical
	7485.500	31.8	11.3	43.1	74.0	-30.9	Peak	Vertical
	11489.000	31.0	17.5	48.5	74.0	-25.5	Peak	Vertical
11	4791.000	34.1	3.8	37.9	74.0	-36.1	Peak	Horizontal
	7494.000	32.3	11.2	43.5	74.0	-30.5	Peak	Horizontal
	11650.500	31.5	17.6	49.1	74.0	-24.9	Peak	Horizontal
	4816.500	34.8	3.7	38.5	74.0	-35.5	Peak	Vertical
	7383.500	32.5	11.2	43.7	74.0	-30.3	Peak	Vertical
	11531.500	31.3	17.3	48.6	74.0	-25.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-05-23 ~ 2024-05-25	Test Mode	802.11g
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4884.500	34.3	3.3	37.6	74.0	-36.4	Peak	Horizontal
	7341.000	32.7	10.8	43.5	74.0	-30.5	Peak	Horizontal
	11650.500	30.4	17.6	48.0	74.0	-26.0	Peak	Horizontal
	7655.500	33.3	10.8	44.1	74.0	-29.9	Peak	Vertical
	11480.500	31.0	17.4	48.4	74.0	-25.6	Peak	Vertical
	11948.000	31.5	17.0	48.5	74.0	-25.5	Peak	Vertical
06	7511.000	31.8	11.2	43.0	74.0	-31.0	Peak	Horizontal
	10919.500	31.1	16.4	47.5	74.0	-26.5	Peak	Horizontal
	11650.500	30.4	17.6	48.0	74.0	-26.0	Peak	Horizontal
	7434.500	31.2	11.4	42.6	74.0	-31.4	Peak	Vertical
	11081.000	31.2	16.7	47.9	74.0	-26.1	Peak	Vertical
	11795.000	30.4	17.4	47.8	74.0	-26.2	Peak	Vertical
11	8454.500	32.2	11.3	43.5	74.0	-30.5	Peak	Horizontal
	11472.000	31.6	17.4	49.0	74.0	-25.0	Peak	Horizontal
	12237.000	30.4	17.0	47.4	74.0	-26.6	Peak	Horizontal
	7536.500	30.2	11.4	41.6	74.0	-32.4	Peak	Vertical
	11540.000	32.0	17.3	49.3	74.0	-24.7	Peak	Vertical
	12347.500	30.0	16.9	46.9	74.0	-27.1	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-05-23 ~ 2024-05-25	Test Mode	802.11n-HT20
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4757.000	34.8	3.6	38.4	74.0	-35.6	Peak	Horizontal
	8301.500	33.7	10.4	44.1	74.0	-29.9	Peak	Horizontal
	11497.500	32.0	17.4	49.4	74.0	-24.6	Peak	Horizontal
	4680.500	34.6	3.5	38.1	74.0	-35.9	Peak	Vertical
	7528.000	32.2	11.4	43.6	74.0	-30.4	Peak	Vertical
	11404.000	30.8	17.3	48.1	74.0	-25.9	Peak	Vertical
06	3975.000	35.8	0.4	36.2	74.0	-37.8	Peak	Horizontal
	5080.000	35.3	3.9	39.2	74.0	-34.8	Peak	Horizontal
	11489.000	31.4	17.5	48.9	74.0	-25.1	Peak	Horizontal
	4680.500	34.3	3.5	37.8	74.0	-36.2	Peak	Vertical
	7307.000	34.4	11.0	45.4	74.0	-28.6	Peak	Vertical
	11472.000	31.0	17.4	48.4	74.0	-25.6	Peak	Vertical
11	4808.000	34.6	3.7	38.3	74.0	-35.7	Peak	Horizontal
	7307.000	34.4	11.0	45.4	74.0	-28.6	Peak	Horizontal
	11540.000	31.6	17.3	48.9	74.0	-25.1	Peak	Horizontal
	4969.500	34.6	3.5	38.1	74.0	-35.9	Peak	Vertical
	8208.000	32.8	10.8	43.6	74.0	-30.4	Peak	Vertical
	11497.500	30.9	17.4	48.3	74.0	-25.7	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-05-23 ~ 2024-05-25	Test Mode	802.11n-HT40
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	4196.000	36.0	1.4	37.4	74.0	-36.6	Peak	Horizontal
	7409.000	32.0	11.3	43.3	74.0	-30.7	Peak	Horizontal
	11582.500	31.2	17.2	48.4	74.0	-25.6	Peak	Horizontal
	4689.000	34.0	3.5	37.5	74.0	-36.5	Peak	Vertical
	7451.500	31.5	11.5	43.0	74.0	-31.0	Peak	Vertical
	11489.000	30.9	17.5	48.4	74.0	-25.6	Peak	Vertical
06	3779.500	35.9	0.3	36.2	74.0	-37.8	Peak	Horizontal
	7681.000	32.5	10.8	43.3	74.0	-30.7	Peak	Horizontal
	11438.000	32.5	17.0	49.5	74.0	-24.5	Peak	Horizontal
	4833.500	35.0	3.6	38.6	74.0	-35.4	Peak	Vertical
	7553.500	32.0	11.4	43.4	74.0	-30.6	Peak	Vertical
	11557.000	31.0	17.4	48.4	74.0	-25.6	Peak	Vertical
09	3890.000	37.2	0.2	37.4	74.0	-36.6	Peak	Horizontal
	8131.500	33.2	11.2	44.4	74.0	-29.6	Peak	Horizontal
	11251.000	31.1	17.1	48.2	74.0	-25.8	Peak	Horizontal
	4816.500	34.7	3.7	38.4	74.0	-35.6	Peak	Vertical
	8123.000	32.6	11.4	44.0	74.0	-30.0	Peak	Vertical
	11820.500	31.7	17.4	49.1	74.0	-24.9	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-05-23 ~ 2024-05-25	Test Mode	802.11ax-HE20
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	3788.000	36.4	0.4	36.8	74.0	-37.2	Peak	Horizontal
	8089.000	32.9	11.2	44.1	74.0	-29.9	Peak	Horizontal
	11820.500	31.5	17.4	48.9	74.0	-25.1	Peak	Horizontal
	5029.000	35.0	3.9	38.9	74.0	-35.1	Peak	Vertical
	7375.000	31.9	11.1	43.0	74.0	-31.0	Peak	Vertical
	11480.500	30.9	17.4	48.3	74.0	-25.7	Peak	Vertical
06	4833.500	35.0	3.6	38.6	74.0	-35.4	Peak	Horizontal
	7494.000	33.3	11.2	44.5	74.0	-29.5	Peak	Horizontal
	11480.500	30.9	17.4	48.3	74.0	-25.7	Peak	Horizontal
	4842.000	35.1	3.6	38.7	74.0	-35.3	Peak	Vertical
	7315.500	35.4	10.9	46.3	74.0	-27.7	Peak	Vertical
	11472.000	31.0	17.4	48.4	74.0	-25.6	Peak	Vertical
11	4196.000	35.5	1.4	36.9	74.0	-37.1	Peak	Horizontal
	7332.500	32.1	10.8	42.9	74.0	-31.1	Peak	Horizontal
	11557.000	30.8	17.4	48.2	74.0	-25.8	Peak	Horizontal
	4825.000	35.6	3.6	39.2	74.0	-34.8	Peak	Vertical
	8131.500	33.0	11.2	44.2	74.0	-29.8	Peak	Vertical
	11642.000	31.5	17.6	49.1	74.0	-24.9	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-05-23 ~ 2024-05-25	Test Mode	802.11ax-HE40
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	3898.500	35.6	0.2	35.8	74.0	-38.2	Peak	Horizontal
	7553.500	31.6	11.4	43.0	74.0	-31.0	Peak	Horizontal
	11659.000	31.1	17.6	48.7	74.0	-25.3	Peak	Horizontal
	4816.500	34.4	3.7	38.1	74.0	-35.9	Peak	Vertical
	8131.500	31.2	11.2	42.4	74.0	-31.6	Peak	Vertical
	11489.000	30.6	17.5	48.1	74.0	-25.9	Peak	Vertical
06	3898.500	36.4	0.2	36.6	74.0	-37.4	Peak	Horizontal
	7341.000	32.5	10.8	43.3	74.0	-30.7	Peak	Horizontal
	11735.500	31.0	17.4	48.4	74.0	-25.6	Peak	Horizontal
	4799.500	34.0	3.7	37.7	74.0	-36.3	Peak	Vertical
	7553.500	31.1	11.4	42.5	74.0	-31.5	Peak	Vertical
	11633.500	30.7	17.4	48.1	74.0	-25.9	Peak	Vertical
09	3873.000	35.6	0.3	35.9	74.0	-38.1	Peak	Horizontal
	7400.500	31.4	11.2	42.6	74.0	-31.4	Peak	Horizontal
	11540.000	31.3	17.3	48.6	74.0	-25.4	Peak	Horizontal
	4748.500	35.4	3.5	38.9	74.0	-35.1	Peak	Vertical
	7511.000	31.7	11.2	42.9	74.0	-31.1	Peak	Vertical
	11395.500	31.3	17.3	48.6	74.0	-25.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-05-23 ~ 2024-05-25	Test Mode	802.11be-EHT20
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	3881.500	36.0	0.2	36.2	74.0	-37.8	Peak	Horizontal
	7417.500	31.5	11.3	42.8	74.0	-31.2	Peak	Horizontal
	11625.000	31.0	17.3	48.3	74.0	-25.7	Peak	Horizontal
	4102.500	35.5	1.0	36.5	74.0	-37.5	Peak	Vertical
	4689.000	33.9	3.5	37.4	74.0	-36.6	Peak	Vertical
	11625.000	30.8	17.3	48.1	74.0	-25.9	Peak	Vertical
06	3881.500	36.3	0.2	36.5	74.0	-37.5	Peak	Horizontal
	7511.000	32.6	11.2	43.8	74.0	-30.2	Peak	Horizontal
	11718.500	31.7	17.5	49.2	74.0	-24.8	Peak	Horizontal
	4833.500	34.7	3.6	38.3	74.0	-35.7	Peak	Vertical
	7307.000	36.0	11.0	47.0	74.0	-27.0	Peak	Vertical
	11480.500	31.9	17.4	49.3	74.0	-24.7	Peak	Vertical
11	4264.000	35.2	1.8	37.0	74.0	-37.0	Peak	Horizontal
	8182.500	32.9	11.1	44.0	74.0	-30.0	Peak	Horizontal
	10945.000	32.4	16.1	48.5	74.0	-25.5	Peak	Horizontal
	4935.500	34.7	3.6	38.3	74.0	-35.7	Peak	Vertical
	7358.000	32.4	10.9	43.3	74.0	-30.7	Peak	Vertical
	11531.500	31.6	17.3	48.9	74.0	-25.1	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-05-23 ~ 2024-05-25	Test Mode	802.11be-EHT40
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	3898.500	36.8	0.2	37.0	74.0	-37.0	Peak	Horizontal
	7519.500	31.8	11.3	43.1	74.0	-30.9	Peak	Horizontal
	11659.000	31.4	17.6	49.0	74.0	-25.0	Peak	Horizontal
	4969.500	35.8	3.5	39.3	74.0	-34.7	Peak	Vertical
	7443.000	31.3	11.4	42.7	74.0	-31.3	Peak	Vertical
	11514.500	31.2	17.2	48.4	74.0	-25.6	Peak	Vertical
06	4111.000	36.1	1.1	37.2	74.0	-36.8	Peak	Horizontal
	7553.500	32.1	11.4	43.5	74.0	-30.5	Peak	Horizontal
	11157.500	32.1	16.7	48.8	74.0	-25.2	Peak	Horizontal
	4825.000	35.0	3.6	38.6	74.0	-35.4	Peak	Vertical
	7324.000	33.1	10.9	44.0	74.0	-30.0	Peak	Vertical
	11225.500	31.3	16.6	47.9	74.0	-26.1	Peak	Vertical
09	4111.000	36.3	1.1	37.4	74.0	-36.6	Peak	Horizontal
	7443.000	32.2	11.4	43.6	74.0	-30.4	Peak	Horizontal
	11540.000	31.5	17.3	48.8	74.0	-25.2	Peak	Horizontal
	4842.000	34.5	3.6	38.1	74.0	-35.9	Peak	Vertical
	7511.000	32.0	11.2	43.2	74.0	-30.8	Peak	Vertical
	11404.000	31.3	17.3	48.6	74.0	-25.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Ant_348

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-06-05 ~ 2024-06-06	Test Mode	802.11b
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4043.000	34.5	0.9	35.4	74.0	-38.6	Peak	Horizontal
	4969.500	33.0	3.5	36.5	74.0	-37.5	Peak	Horizontal
	11633.500	31.5	17.4	48.9	74.0	-25.1	Peak	Horizontal
	4119.500	35.7	1.1	36.8	74.0	-37.2	Peak	Vertical
	5012.000	33.2	3.8	37.0	74.0	-37.0	Peak	Vertical
	10783.500	31.2	15.7	46.9	74.0	-27.1	Peak	Vertical
06	4179.000	36.2	1.2	37.4	74.0	-36.6	Peak	Horizontal
	5012.000	34.0	3.8	37.8	74.0	-36.2	Peak	Horizontal
	11574.000	32.0	17.3	49.3	74.0	-24.7	Peak	Horizontal
	4119.500	34.6	1.1	35.7	74.0	-38.3	Peak	Vertical
	4944.000	32.2	3.5	35.7	74.0	-38.3	Peak	Vertical
	11650.500	31.3	17.6	48.9	74.0	-25.1	Peak	Vertical
11	3949.500	35.2	0.3	35.5	74.0	-38.5	Peak	Horizontal
	4876.000	32.4	3.3	35.7	74.0	-38.3	Peak	Horizontal
	11557.000	32.3	17.4	49.7	74.0	-24.3	Peak	Horizontal
	4816.500	36.0	3.7	39.7	74.0	-34.3	Peak	Vertical
	7383.500	34.4	11.2	45.6	74.0	-28.4	Peak	Vertical
	11531.500	31.3	17.3	48.6	74.0	-25.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-06-05 ~ 2024-06-06	Test Mode	802.11g
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	3830.500	37.5	0.2	37.7	74.0	-36.3	Peak	Horizontal
	4791.000	33.4	3.8	37.2	74.0	-36.8	Peak	Horizontal
	11480.500	31.3	17.4	48.7	74.0	-25.3	Peak	Horizontal
	4213.000	36.1	1.4	37.5	74.0	-36.5	Peak	Vertical
	4689.000	35.3	3.5	38.8	74.0	-35.2	Peak	Vertical
	11557.000	31.2	17.4	48.6	74.0	-25.4	Peak	Vertical
06	3873.000	36.9	0.3	37.2	74.0	-36.8	Peak	Horizontal
	4850.500	35.2	3.6	38.8	74.0	-35.2	Peak	Horizontal
	11973.500	33.2	16.8	50.0	74.0	-24.0	Peak	Horizontal
	3720.000	36.8	0.2	37.0	74.0	-37.0	Peak	Vertical
	4816.500	34.5	3.7	38.2	74.0	-35.8	Peak	Vertical
	11701.500	31.8	17.4	49.2	74.0	-24.8	Peak	Vertical
11	3949.500	37.0	0.3	37.3	74.0	-36.7	Peak	Horizontal
	4825.000	34.7	3.6	38.3	74.0	-35.7	Peak	Horizontal
	11514.500	31.6	17.2	48.8	74.0	-25.2	Peak	Horizontal
	4119.500	36.0	1.1	37.1	74.0	-36.9	Peak	Vertical
	4969.500	35.2	3.5	38.7	74.0	-35.3	Peak	Vertical
	11897.000	30.7	17.1	47.8	74.0	-26.2	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-06-05 ~ 2024-06-06	Test Mode	802.11n-HT20
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4026.000	35.8	0.9	36.7	74.0	-37.3	Peak	Horizontal
	4842.000	35.6	3.6	39.2	74.0	-34.8	Peak	Horizontal
	11582.500	31.1	17.2	48.3	74.0	-25.7	Peak	Horizontal
	3890.000	36.4	0.2	36.6	74.0	-37.4	Peak	Vertical
	4663.500	35.7	3.3	39.0	74.0	-35.0	Peak	Vertical
	11710.000	31.7	17.5	49.2	74.0	-24.8	Peak	Vertical
06	4196.000	35.2	1.4	36.6	74.0	-37.4	Peak	Horizontal
	5054.500	35.6	3.9	39.5	74.0	-34.5	Peak	Horizontal
	11429.500	30.3	17.1	47.4	74.0	-26.6	Peak	Horizontal
	3898.500	37.6	0.2	37.8	74.0	-36.2	Peak	Vertical
	5037.500	34.8	3.9	38.7	74.0	-35.3	Peak	Vertical
	12211.500	32.6	17.3	49.9	74.0	-24.1	Peak	Vertical
11	4128.000	35.4	1.1	36.5	74.0	-37.5	Peak	Horizontal
	4816.500	34.7	3.7	38.4	74.0	-35.6	Peak	Horizontal
	11463.500	31.4	17.3	48.7	74.0	-25.3	Peak	Horizontal
	4264.000	35.8	1.8	37.6	74.0	-36.4	Peak	Vertical
	4816.500	35.0	3.7	38.7	74.0	-35.3	Peak	Vertical
	11115.000	32.3	16.3	48.6	74.0	-25.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-06-05 ~ 2024-06-06	Test Mode	802.11n-HT40
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	4196.000	35.8	1.4	37.2	74.0	-36.8	Peak	Horizontal
	5054.500	35.1	3.9	39.0	74.0	-35.0	Peak	Horizontal
	11523.000	31.5	17.1	48.6	74.0	-25.4	Peak	Horizontal
	4034.500	35.9	0.9	36.8	74.0	-37.2	Peak	Vertical
	4833.500	35.2	3.6	38.8	74.0	-35.2	Peak	Vertical
	11489.000	30.9	17.5	48.4	74.0	-25.6	Peak	Vertical
06	3813.500	35.1	0.3	35.4	74.0	-38.6	Peak	Horizontal
	4876.000	33.0	3.3	36.3	74.0	-37.7	Peak	Horizontal
	11684.500	30.0	17.3	47.3	74.0	-26.7	Peak	Horizontal
	3949.500	36.2	0.3	36.5	74.0	-37.5	Peak	Vertical
	5037.500	33.5	3.9	37.4	74.0	-36.6	Peak	Vertical
	11429.500	30.0	17.1	47.1	74.0	-26.9	Peak	Vertical
09	3711.500	35.8	0.2	36.0	74.0	-38.0	Peak	Horizontal
	4791.000	33.2	3.8	37.0	74.0	-37.0	Peak	Horizontal
	11361.500	31.5	17.1	48.6	74.0	-25.4	Peak	Horizontal
	3915.500	35.4	0.2	35.6	74.0	-38.4	Peak	Vertical
	4748.500	32.6	3.5	36.1	74.0	-37.9	Peak	Vertical
	11489.000	32.1	17.5	49.6	74.0	-24.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-06-05 ~ 2024-06-06	Test Mode	802.11ax-HE20
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	3924.000	36.3	0.1	36.4	74.0	-37.6	Peak	Horizontal
	4816.500	36.2	3.7	39.9	74.0	-34.1	Peak	Horizontal
	11846.000	31.1	16.9	48.0	74.0	-26.0	Peak	Horizontal
	3932.500	36.2	0.2	36.4	74.0	-37.6	Peak	Vertical
	4774.000	32.6	3.7	36.3	74.0	-37.7	Peak	Vertical
	11744.000	29.4	17.2	46.6	74.0	-27.4	Peak	Vertical
06	3915.500	34.6	0.2	34.8	74.0	-39.2	Peak	Horizontal
	4816.500	35.1	3.7	38.8	74.0	-35.2	Peak	Horizontal
	11548.500	32.2	17.3	49.5	74.0	-24.5	Peak	Horizontal
	4060.000	35.3	0.8	36.1	74.0	-37.9	Peak	Vertical
	4969.500	34.4	3.5	37.9	74.0	-36.1	Peak	Vertical
	11659.000	31.4	17.6	49.0	74.0	-25.0	Peak	Vertical
11	4119.500	36.7	1.1	37.8	74.0	-36.2	Peak	Horizontal
	4825.000	35.7	3.6	39.3	74.0	-34.7	Peak	Horizontal
	11803.500	32.4	17.5	49.9	74.0	-24.1	Peak	Horizontal
	3728.500	36.6	0.2	36.8	74.0	-37.2	Peak	Vertical
	4791.000	34.5	3.8	38.3	74.0	-35.7	Peak	Vertical
	11676.000	31.7	17.2	48.9	74.0	-25.1	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-06-05 ~ 2024-06-06	Test Mode	802.11ax-HE40
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	4128.000	36.4	1.1	37.5	74.0	-36.5	Peak	Horizontal
	4893.000	35.2	3.4	38.6	74.0	-35.4	Peak	Horizontal
	11072.500	33.0	16.4	49.4	74.0	-24.6	Peak	Horizontal
	4128.000	36.4	1.1	37.5	74.0	-36.5	Peak	Vertical
	4893.000	35.2	3.4	38.6	74.0	-35.4	Peak	Vertical
	11718.500	32.0	17.5	49.5	74.0	-24.5	Peak	Vertical
06	3949.500	35.6	0.3	35.9	74.0	-38.1	Peak	Horizontal
	4833.500	35.4	3.6	39.0	74.0	-35.0	Peak	Horizontal
	11574.000	32.0	17.3	49.3	74.0	-24.7	Peak	Horizontal
	4009.000	34.5	0.6	35.1	74.0	-38.9	Peak	Vertical
	4774.000	32.7	3.7	36.4	74.0	-37.6	Peak	Vertical
	11582.500	31.4	17.2	48.6	74.0	-25.4	Peak	Vertical
09	4094.000	35.6	0.9	36.5	74.0	-37.5	Peak	Horizontal
	4901.500	34.4	3.5	37.9	74.0	-36.1	Peak	Horizontal
	11497.500	31.8	17.4	49.2	74.0	-24.8	Peak	Horizontal
	4153.500	34.7	1.1	35.8	74.0	-38.2	Peak	Vertical
	4901.500	34.7	3.5	38.2	74.0	-35.8	Peak	Vertical
	11905.500	32.6	16.9	49.5	74.0	-24.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-06-05 ~ 2024-06-06	Test Mode	802.11be-EHT20
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4026.000	34.1	0.9	35.0	74.0	-39.0	Peak	Horizontal
	5012.000	32.3	3.8	36.1	74.0	-37.9	Peak	Horizontal
	11531.500	29.9	17.3	47.2	74.0	-26.8	Peak	Horizontal
	3992.000	33.8	0.4	34.2	74.0	-39.8	Peak	Vertical
	4859.000	34.5	3.5	38.0	74.0	-36.0	Peak	Vertical
	11888.500	31.9	17.0	48.9	74.0	-25.1	Peak	Vertical
06	4910.000	35.1	3.6	38.7	74.0	-35.3	Peak	Horizontal
	7315.500	35.2	10.9	46.1	74.0	-27.9	Peak	Horizontal
	11004.500	31.1	16.5	47.6	74.0	-26.4	Peak	Horizontal
	5029.000	34.6	3.9	38.5	74.0	-35.5	Peak	Vertical
	7307.000	34.5	11.0	45.5	74.0	-28.5	Peak	Vertical
	11463.500	31.0	17.3	48.3	74.0	-25.7	Peak	Vertical
11	3975.000	34.9	0.4	35.3	74.0	-38.7	Peak	Horizontal
	4748.500	33.6	3.5	37.1	74.0	-36.9	Peak	Horizontal
	11480.500	31.8	17.4	49.2	74.0	-24.8	Peak	Horizontal
	3898.500	35.5	0.2	35.7	74.0	-38.3	Peak	Vertical
	4816.500	36.3	3.7	40.0	74.0	-34.0	Peak	Vertical
	11514.500	31.9	17.2	49.1	74.0	-24.9	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-06-05 ~ 2024-06-06	Test Mode	802.11be-EHT40
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	3864.500	35.6	0.3	35.9	74.0	-38.1	Peak	Horizontal
	4825.000	35.3	3.6	38.9	74.0	-35.1	Peak	Horizontal
	11582.500	31.3	17.2	48.5	74.0	-25.5	Peak	Horizontal
	4094.000	35.1	0.9	36.0	74.0	-38.0	Peak	Vertical
	4791.000	33.1	3.8	36.9	74.0	-37.1	Peak	Vertical
	10928.000	32.3	16.4	48.7	74.0	-25.3	Peak	Vertical
06	4136.500	34.3	1.1	35.4	74.0	-38.6	Peak	Horizontal
	4706.000	33.1	3.5	36.6	74.0	-37.4	Peak	Horizontal
	11378.500	29.9	17.2	47.1	74.0	-26.9	Peak	Horizontal
	4119.500	35.3	1.1	36.4	74.0	-37.6	Peak	Vertical
	4876.000	33.1	3.3	36.4	74.0	-37.6	Peak	Vertical
	12058.500	30.6	16.8	47.4	74.0	-26.6	Peak	Vertical
09	3975.000	34.8	0.4	35.2	74.0	-38.8	Peak	Horizontal
	4774.000	32.2	3.7	35.9	74.0	-38.1	Peak	Horizontal
	11412.500	31.6	17.3	48.9	74.0	-25.1	Peak	Horizontal
	3992.000	34.3	0.4	34.7	74.0	-39.3	Peak	Vertical
	4859.000	33.7	3.5	37.2	74.0	-36.8	Peak	Vertical
	11846.000	30.3	16.9	47.2	74.0	-26.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission for below 30M:

Site	WZ-AC2	Test Date	2024-07-31
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	FMZB1519B_9kHz-30MHz-SIP	Polarity	Coaxial
EUT	ACCESS POINT	Test Voltage	AC 120V/60V
Test Mode	Transmit by 802.11b at 2412MHz		

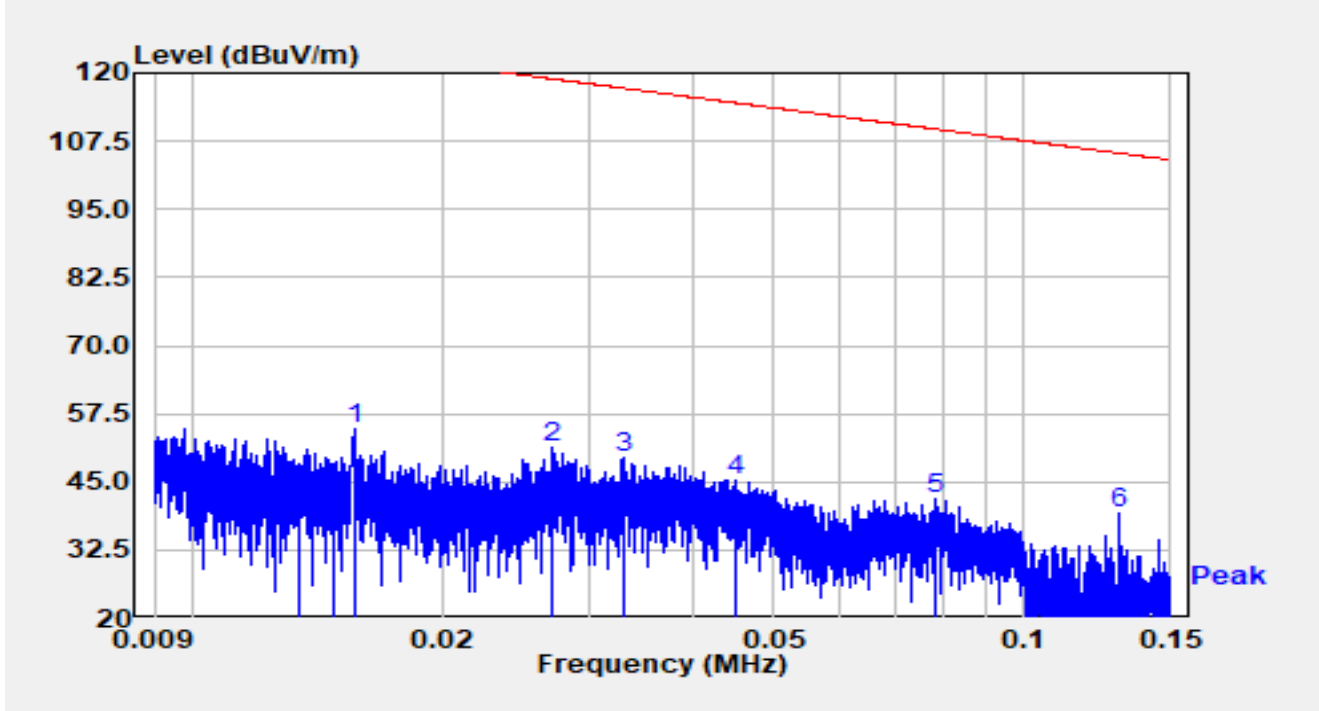


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.016	34.40	20.20	54.59	-69.11	123.71	Peak
2		0.027	31.48	19.74	51.22	-67.74	118.96	Peak
3		0.033	30.12	19.50	49.62	-67.59	117.21	Peak
4		0.045	26.14	19.24	45.38	-69.13	114.52	Peak
5		0.078	22.84	19.16	42.01	-67.69	109.70	Peak
6	*	0.130	20.29	19.11	39.40	-65.91	105.31	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site	WZ-AC2	Test Date	2024-07-31
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	FMZB1519B_9kHz-30MHz-SIP	Polarity	Coplanar
EUT	ACCESS POINT	Test Voltage	AC 120V/60V
Test Mode	Transmit by 802.11b at 2412MHz		

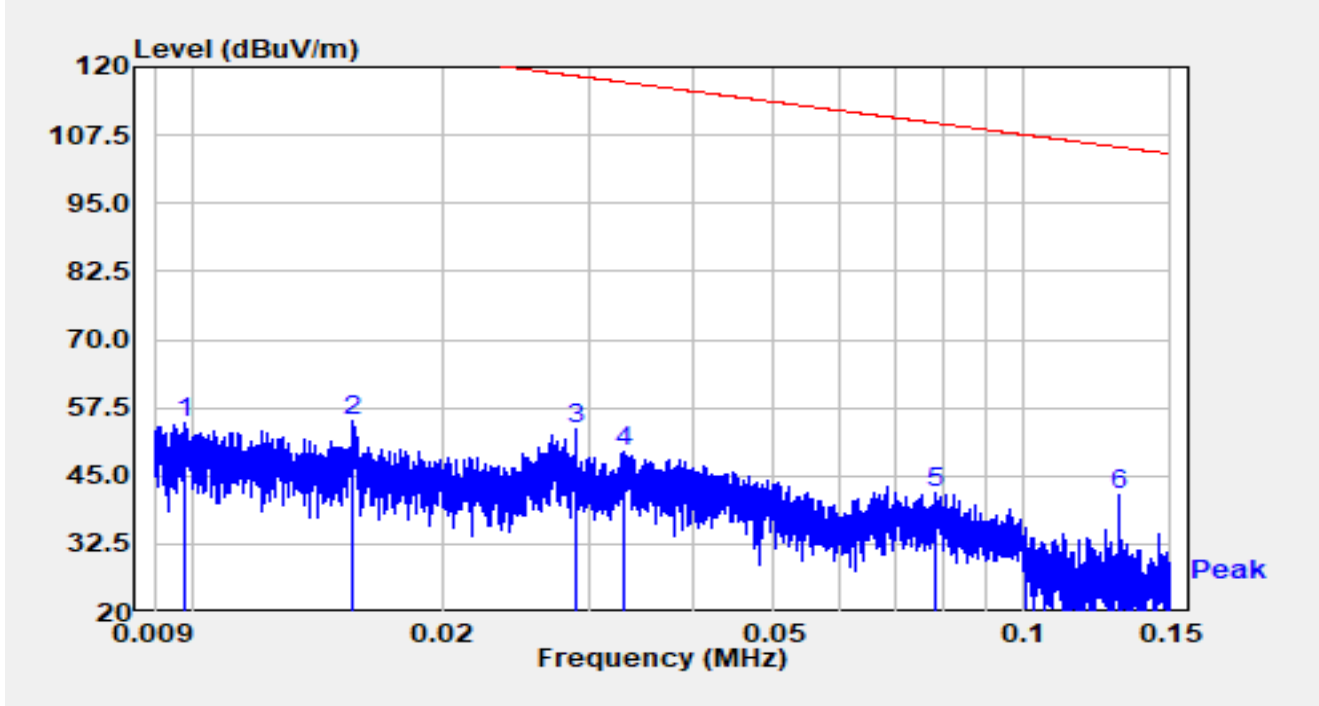


No	Mark	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Detector
1		0.010	34.44	20.43	54.87	-72.89	127.76	Peak
2		0.016	34.74	20.20	54.94	-68.80	123.74	Peak
3		0.029	33.80	19.66	53.46	-64.89	118.35	Peak
4		0.033	30.12	19.50	49.62	-67.59	117.21	Peak
5		0.078	22.84	19.16	42.01	-67.69	109.70	Peak
6	*	0.130	22.45	19.11	41.56	-63.75	105.31	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB μ V/m) = Reading (dB μ V) + C.F (dB/m).
- 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site	WZ-AC2	Test Date	2024-07-31
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	FMZB1519B_9kHz-30MHz-SIP	Polarity	Coaxial
EUT	ACCESS POINT	Test Voltage	AC 120V/60V
Test Mode	Transmit by 802.11b at 2412MHz		

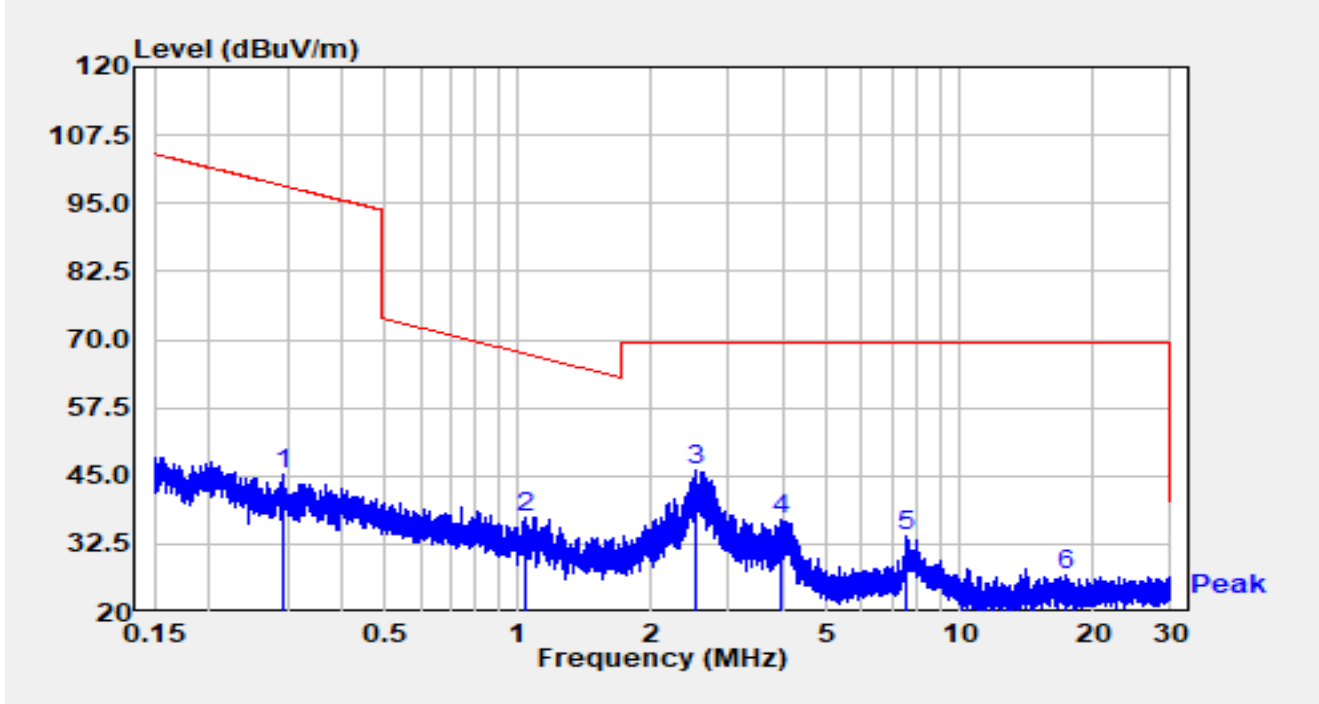


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.295	26.12	19.09	45.21	-53.01	98.21	Peak
2		1.044	18.20	19.12	37.32	-29.93	67.25	Peak
3	*	2.539	26.74	19.23	45.97	-23.53	69.50	Peak
4		3.928	17.64	19.27	36.91	-32.59	69.50	Peak
5		7.518	14.78	19.13	33.91	-35.59	69.50	Peak
6		17.355	7.68	19.20	26.88	-42.62	69.50	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site	WZ-AC2	Test Date	2024-07-31
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	FMZB1519B_9kHz-30MHz-SIP	Polarity	Coplanar
EUT	ACCESS POINT	Test Voltage	AC 120V/60V
Test Mode	Transmit by 802.11b at 2412MHz		

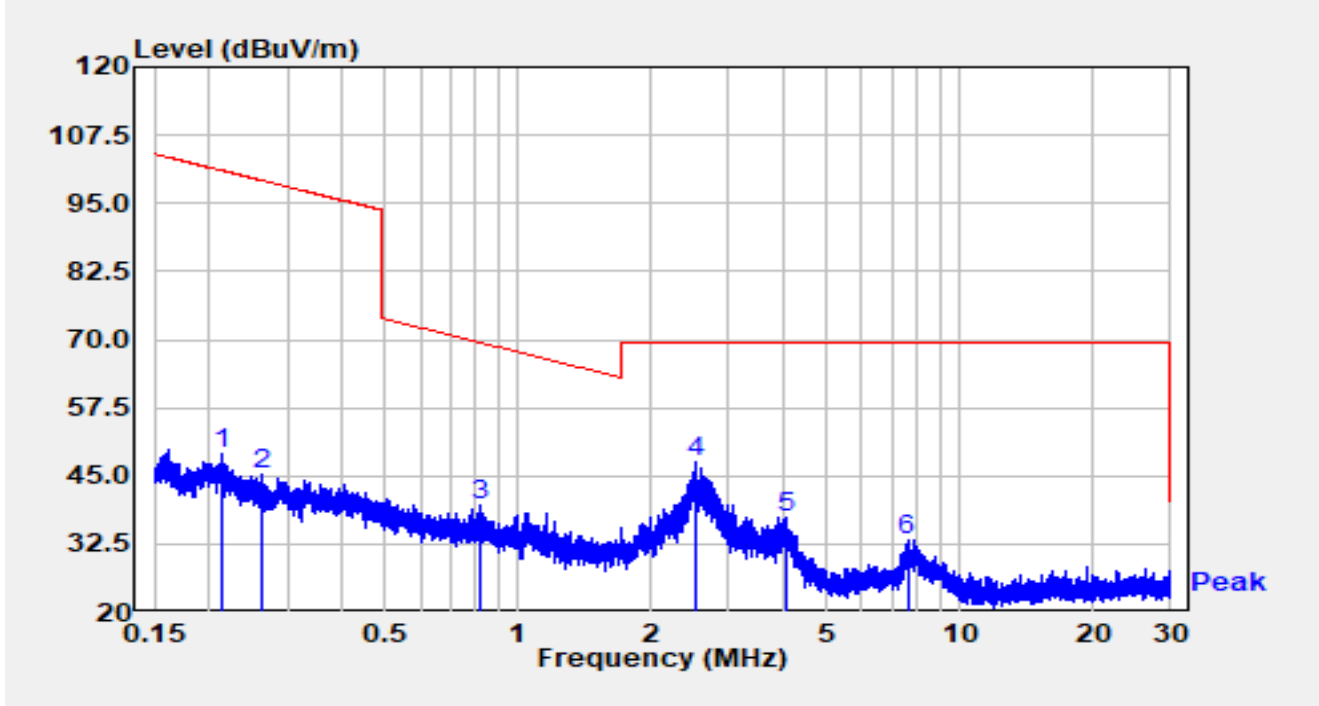


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.214	30.01	19.09	49.11	-51.87	100.98	Peak
2		0.262	26.17	19.09	45.26	-53.97	99.23	Peak
3		0.822	20.38	19.09	39.47	-29.85	69.32	Peak
4	*	2.516	28.20	19.23	47.42	-22.08	69.50	Peak
5		4.032	18.27	19.26	37.53	-31.97	69.50	Peak
6		7.610	14.19	19.13	33.32	-36.18	69.50	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

The Result of Radiated Emission for 30MHz ~ 1GHz:

Site	WZ-AC2	Test Date	2024-07-31
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	VULB 9162_30-7000MHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60V
Test Mode	Transmit by 802.11b at 2412MHz		

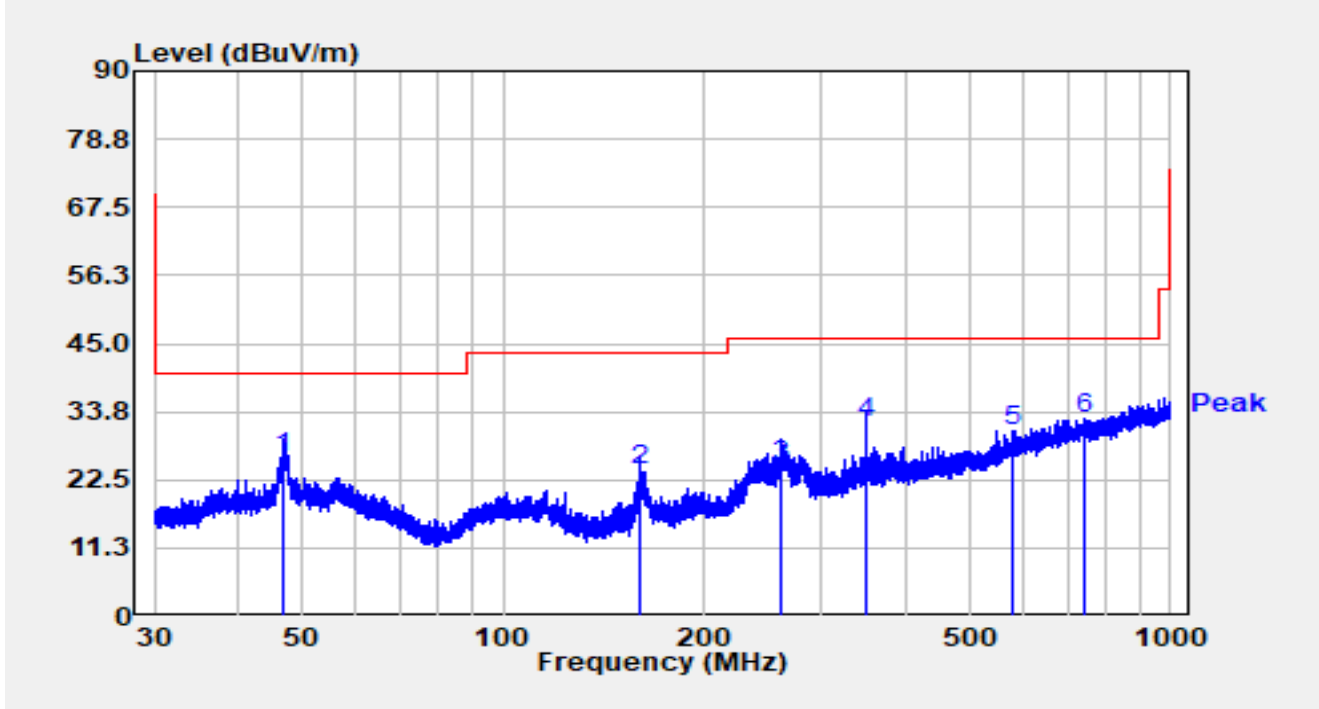


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		46.962	5.60	20.41	26.01	-13.99	40.00	QP
2		160.909	8.10	15.89	23.99	-19.51	43.50	QP
3		261.058	4.30	20.46	24.76	-21.24	46.00	QP
4		349.986	8.80	22.97	31.77	-14.23	46.00	QP
5		577.454	3.43	27.16	30.58	-15.42	46.00	QP
6	*	740.439	2.34	30.15	32.49	-13.51	46.00	QP

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-31
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	VULB 9162_30-7000MHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60V
Test Mode	Transmit by 802.11b at 2412MHz		

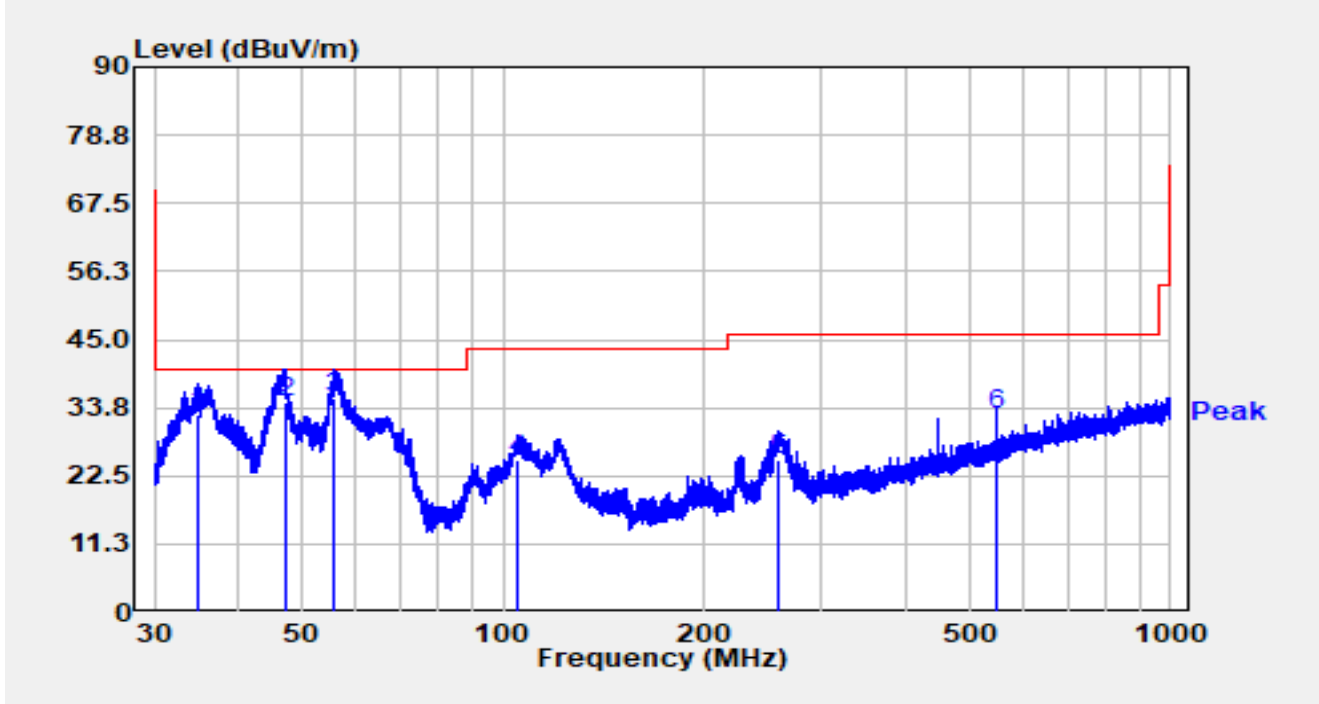


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		34.944	15.20	17.54	32.74	-7.26	40.00	QP
2		47.210	14.22	20.42	34.64	-5.36	40.00	QP
3	*	55.883	15.10	20.06	35.16	-4.84	40.00	QP
4		104.867	6.40	18.61	25.01	-18.49	43.50	QP
5		258.055	4.50	20.47	24.97	-21.03	46.00	QP
6		549.983	6.20	26.47	32.67	-13.33	46.00	QP

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Result of Radiated Emission for 18~25 GHz:

Site	WZ-AC2	Test Date	2024-07-30
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9170_549_18-40GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60V
Test Mode	Transmit by 802.11b at 2412MHz		

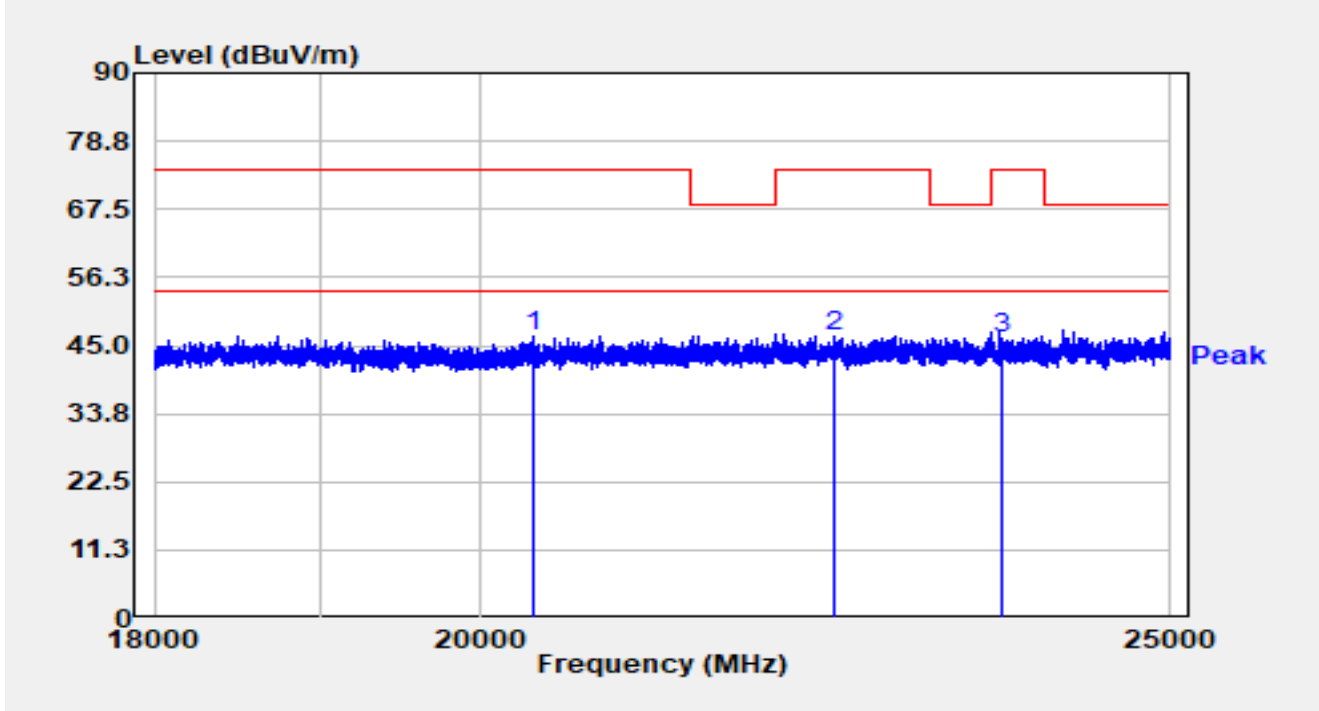


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	20338.700	56.10	-9.47	46.63	-27.37	74.00	Peak
2		22426.800	53.97	-7.57	46.40	-27.60	74.00	Peak
3		23679.800	53.20	-6.98	46.21	-27.79	74.00	Peak

Notes:

1. "*" , means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-07-30
Test Engineer	Bob Zhang	Temp./Humidity	25.5°C/56.8%
Factor	BBHA 9170_549_18-40GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60V
Test Mode	Transmit by 802.11b at 2412MHz		

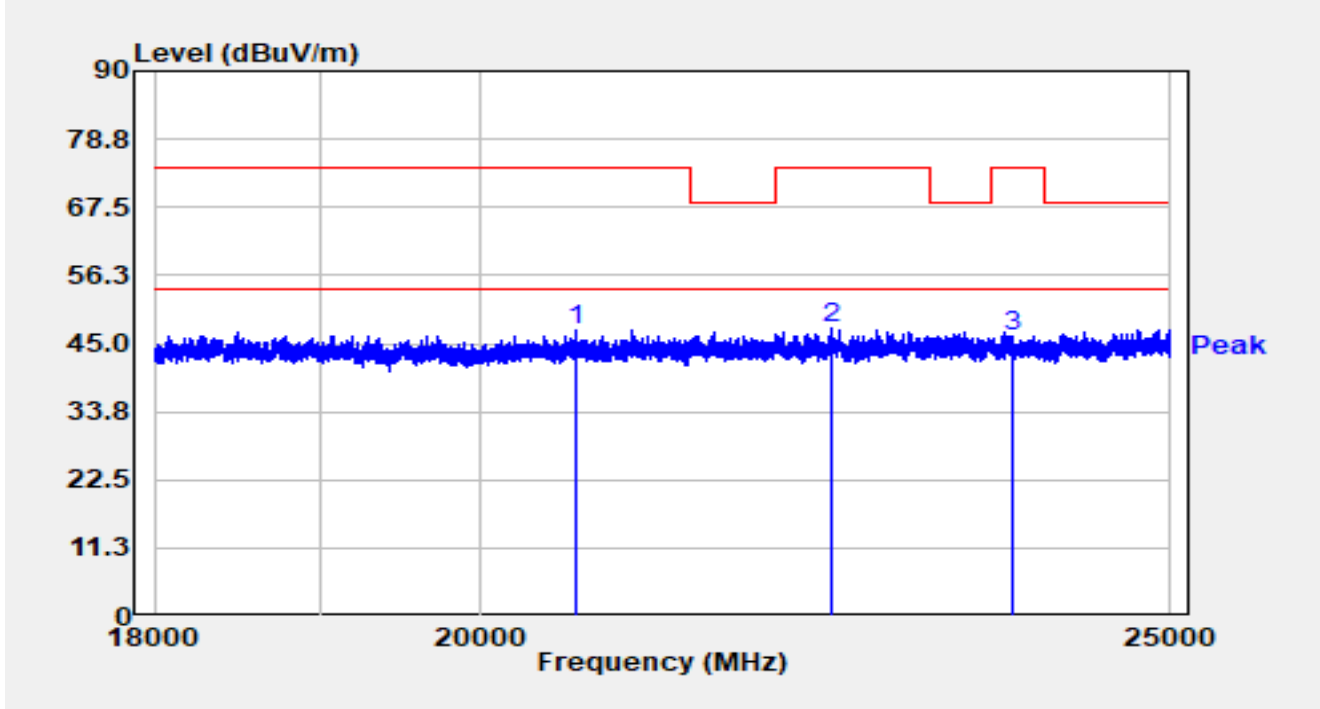

No	Mark	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Detector
1		20631.300	56.55	-9.21	47.34	-26.66	74.00	Peak
2	*	22404.400	54.84	-7.42	47.42	-26.58	74.00	Peak
3		23761.700	53.22	-6.98	46.24	-27.76	74.00	Peak


Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dB μ V/m) = Reading (dB μ V) + C.F (dB/m).

A.7 Radiated Restricted Band Edge Test Result

Ant_311

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

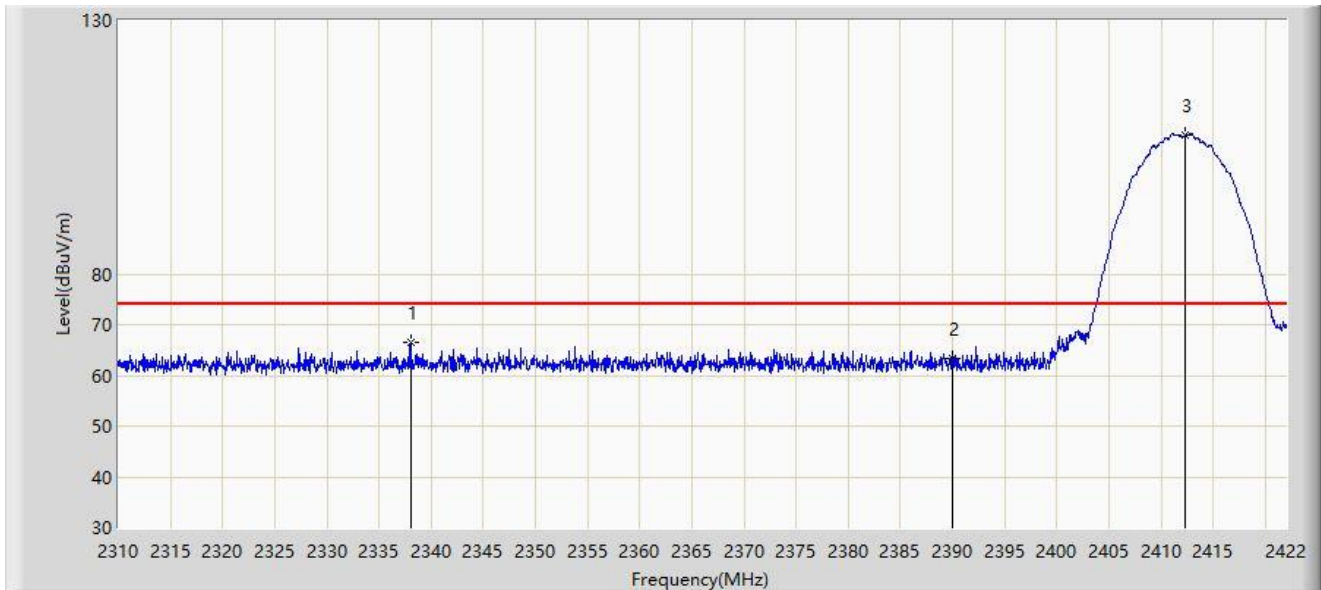


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2338.000	66.383	33.610	-7.617	74.000	32.773	PK
2		2390.000	63.274	30.748	-10.726	74.000	32.527	PK
3		2412.368	107.494	75.032	N/A	N/A	32.462	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

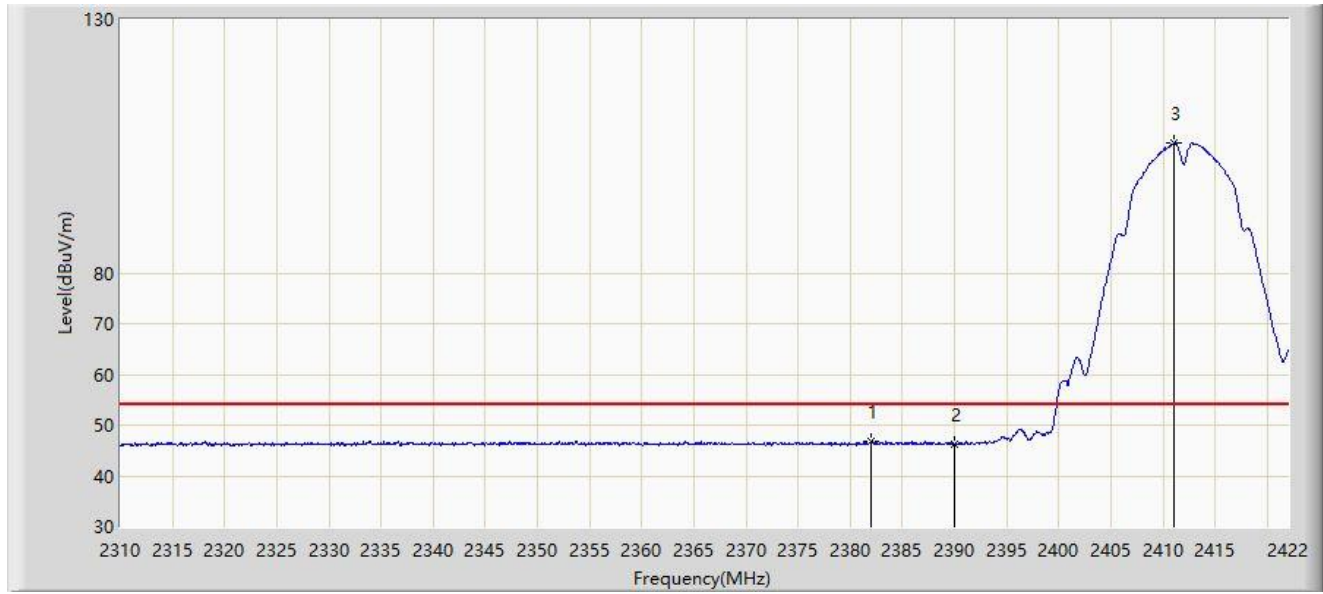


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2382.016	46.696	14.140	-7.304	54.000	32.556	AV
2		2390.000	46.149	13.623	-7.851	54.000	32.527	AV
3		2411.080	105.697	73.232	N/A	N/A	32.465	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

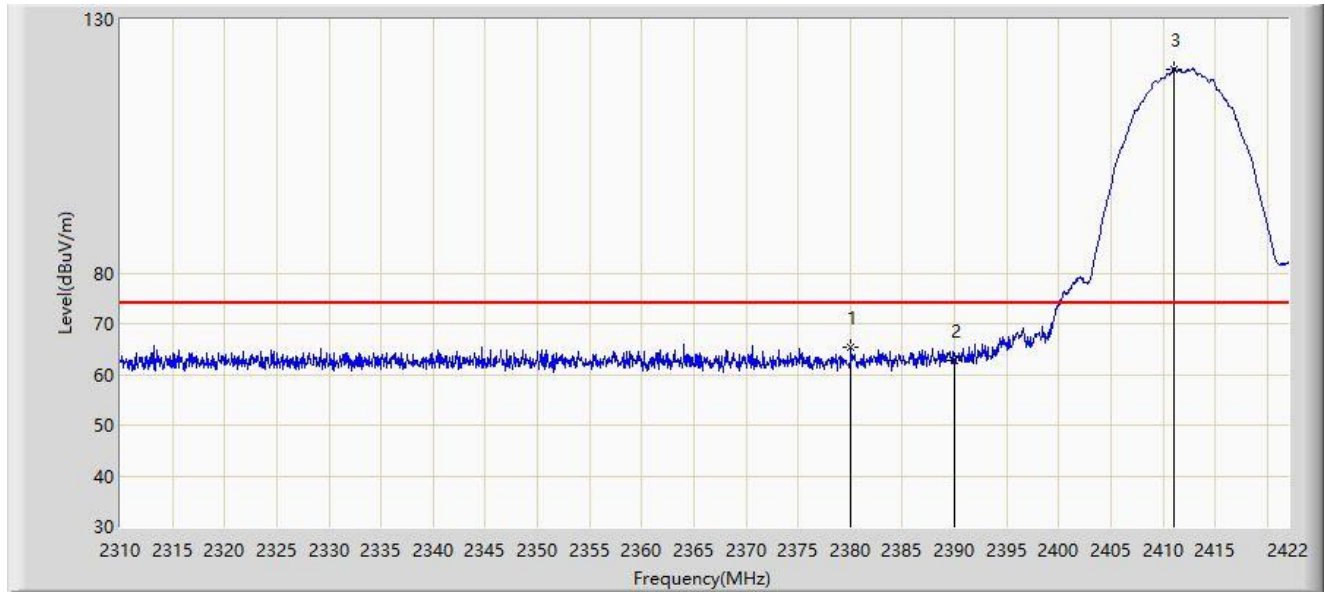


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2380.056	65.461	32.895	-8.539	74.000	32.567	PK
2		2390.000	62.710	30.184	-11.290	74.000	32.527	PK
3		2411.024	120.254	87.789	N/A	N/A	32.465	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

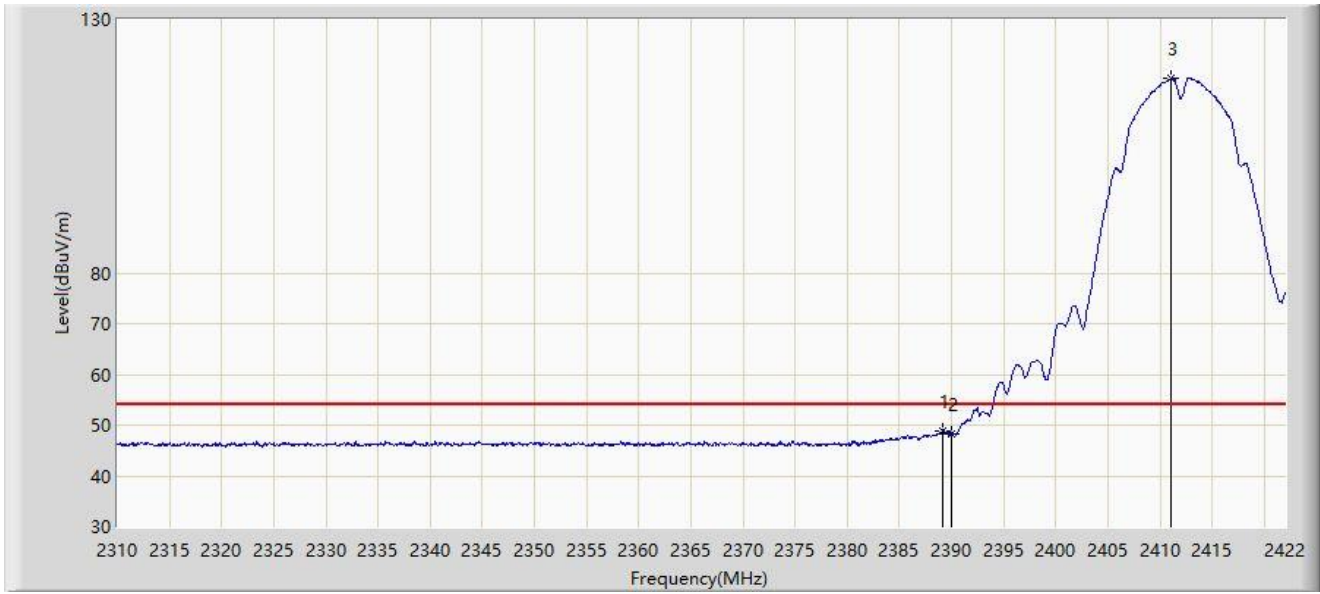


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.128	48.841	16.312	-5.159	54.000	32.530	AV
2		2390.000	48.173	15.647	-5.827	54.000	32.527	AV
3		2411.080	118.380	85.915	N/A	N/A	32.465	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

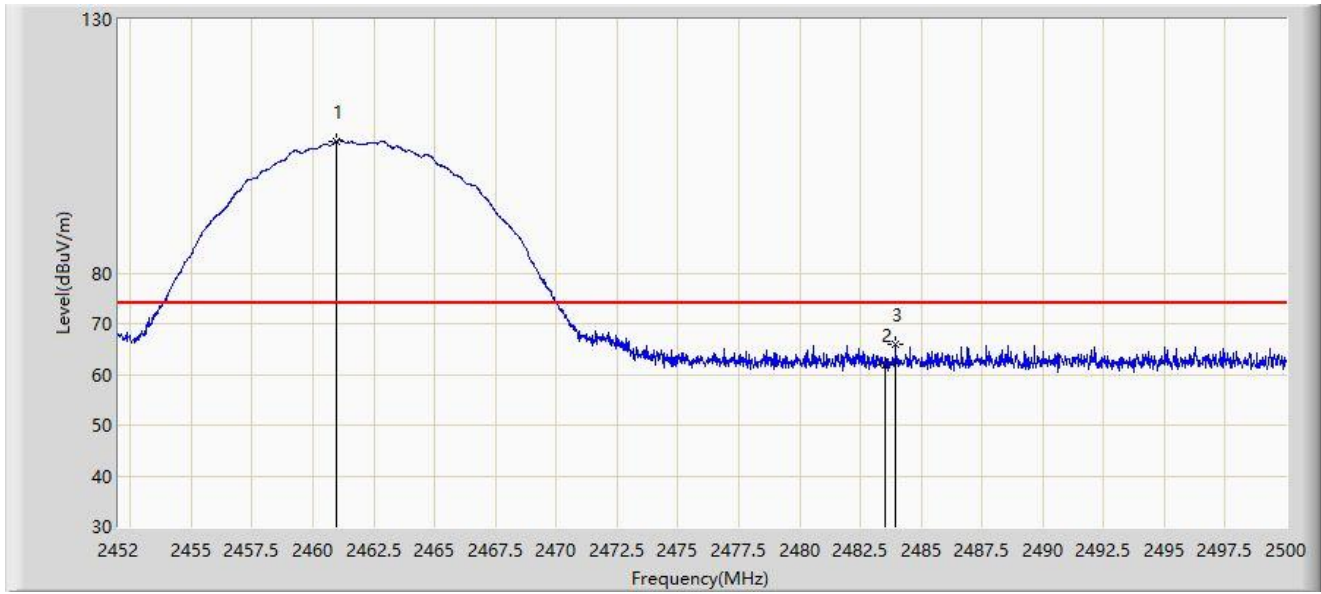

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2460.976	105.997	73.635	N/A	N/A	32.362	PK
2		2483.500	61.866	29.484	-12.134	74.000	32.382	PK
3	*	2483.944	65.946	33.564	-8.054	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.096	104.080	71.718	N/A	N/A	32.362	AV
2	*	2483.500	45.993	13.611	-8.007	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

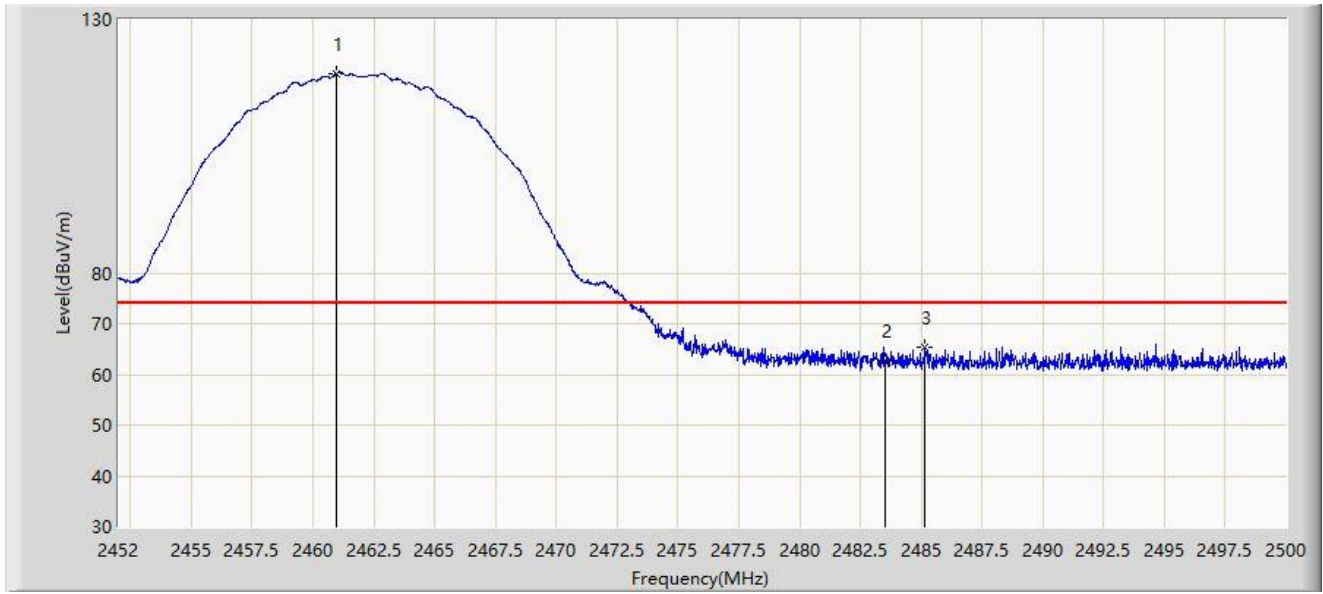


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2460.976	119.356	86.994	N/A	N/A	32.362	PK
2		2483.500	62.820	30.438	-11.180	74.000	32.382	PK
3	*	2485.168	65.387	33.005	-8.613	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

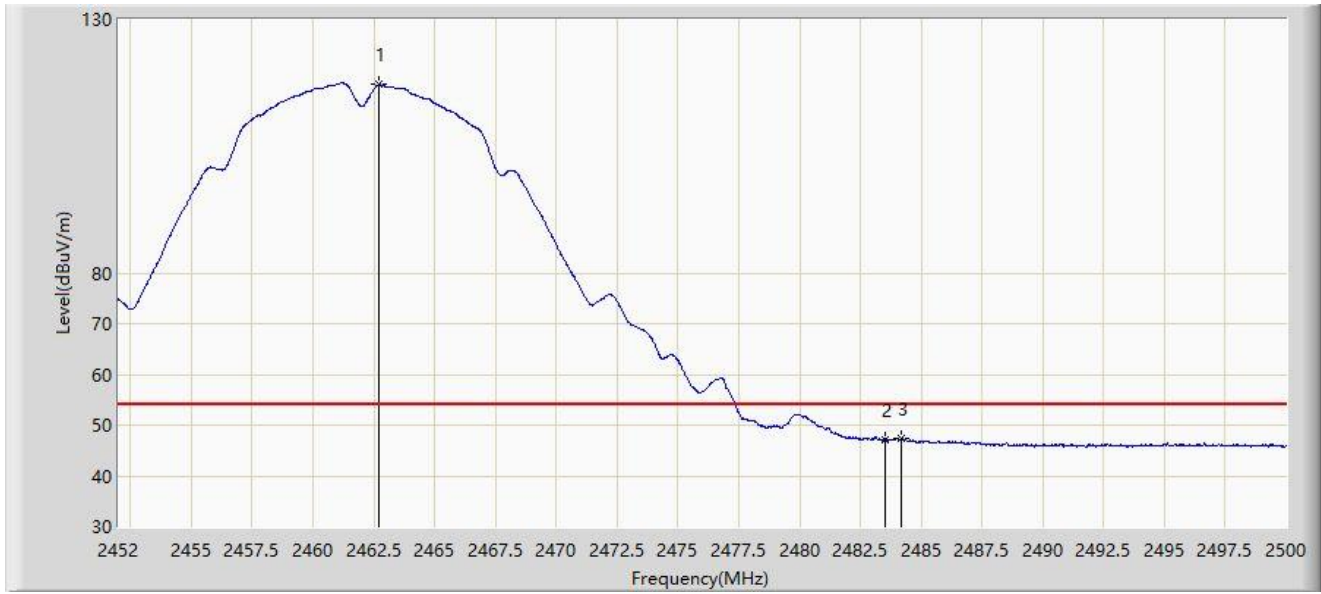


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2462.704	117.130	84.766	N/A	N/A	32.364	AV
2		2483.500	47.177	14.795	-6.823	54.000	32.382	AV
3	*	2484.160	47.249	14.867	-6.751	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

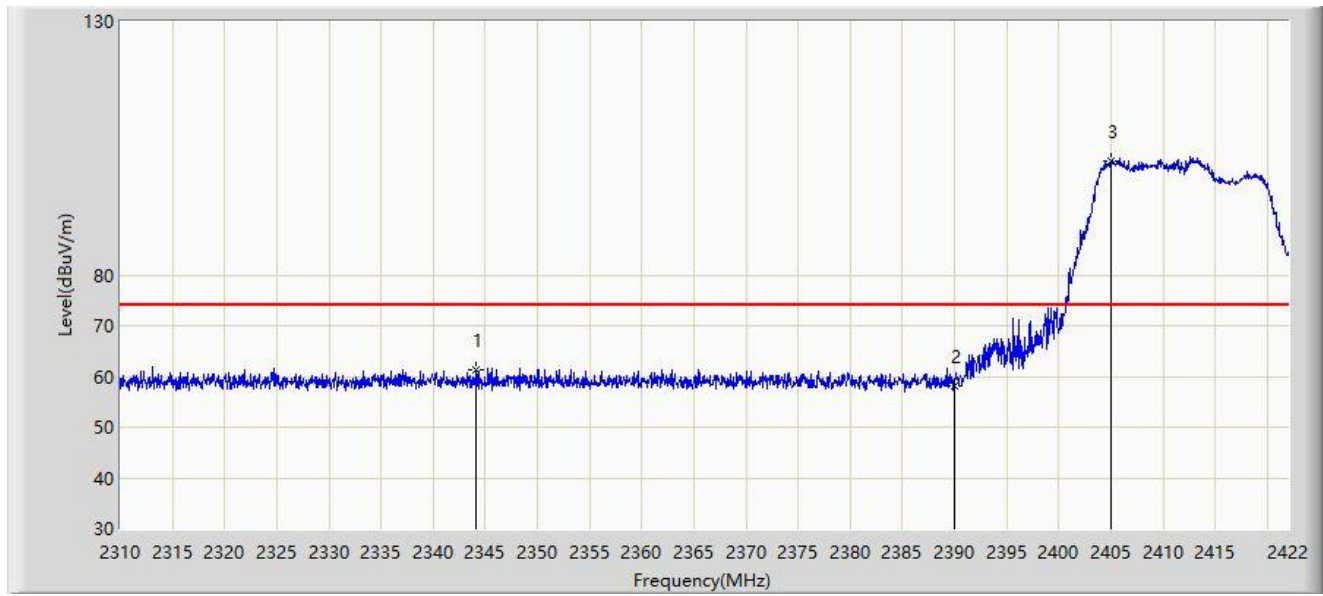


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2344.160	61.434	28.657	-12.566	74.000	32.777	PK
2		2390.000	58.112	25.586	-15.888	74.000	32.527	PK
3		2404.976	102.598	70.117	N/A	N/A	32.480	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

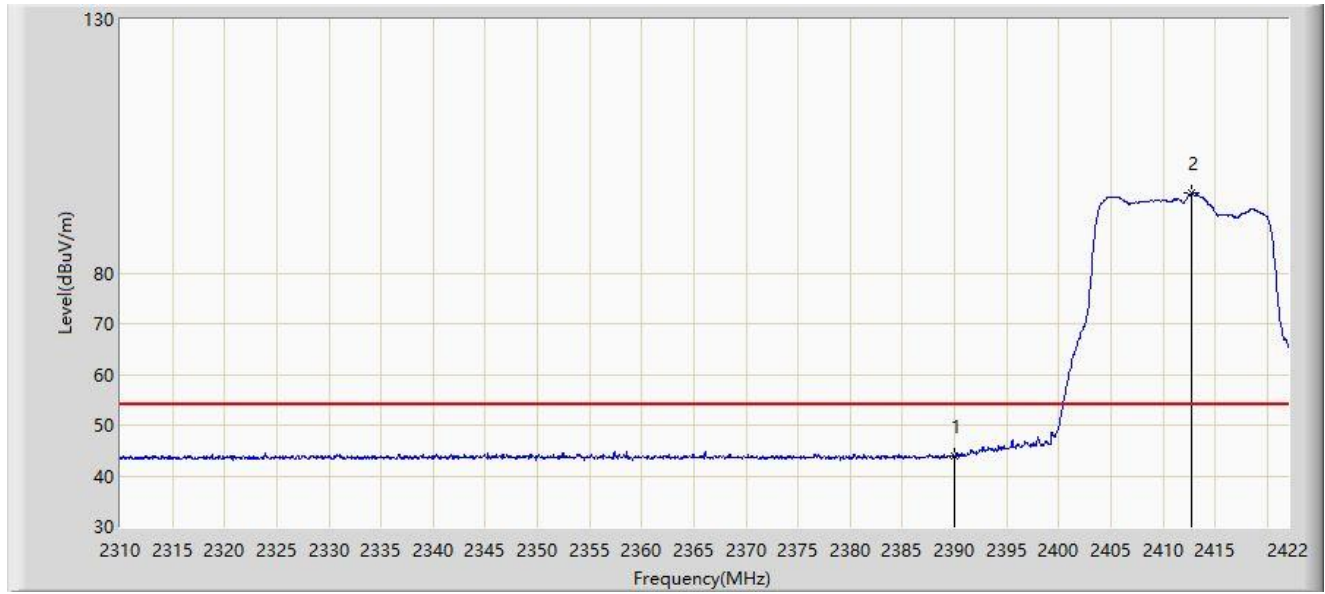


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	43.808	11.282	-10.192	54.000	32.527	AV
2		2412.704	95.703	63.242	N/A	N/A	32.461	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

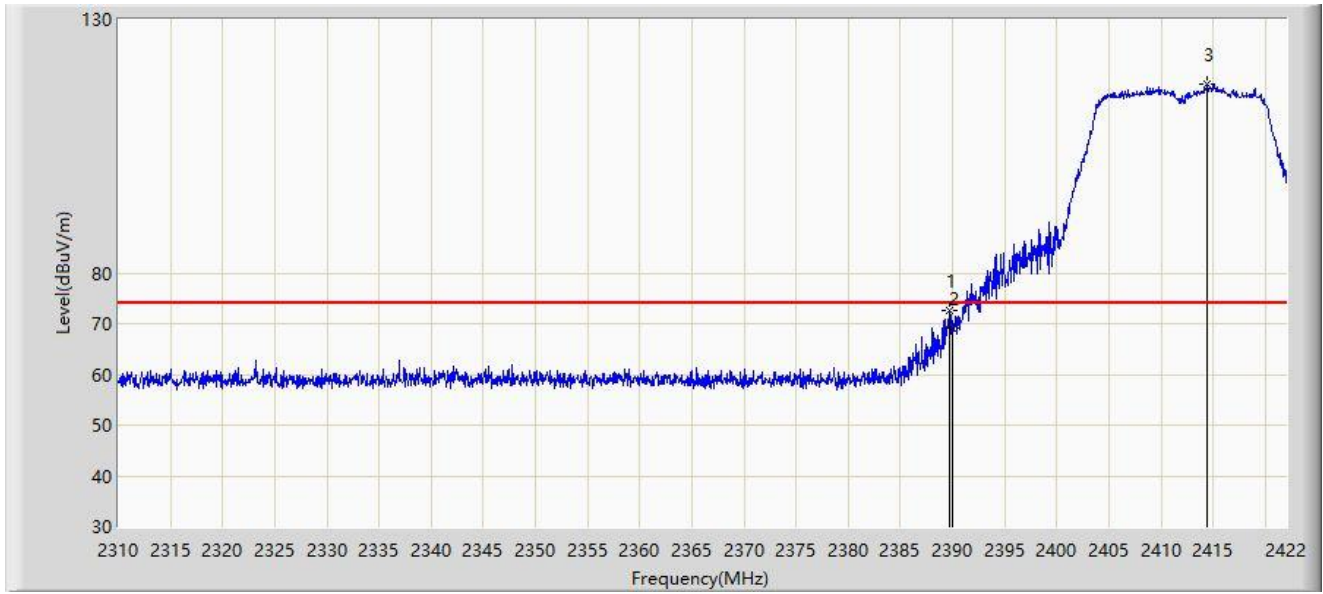


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.744	72.569	40.042	-1.431	74.000	32.528	PK
2		2390.000	69.146	36.620	-4.854	74.000	32.527	PK
3		2414.440	117.165	84.708	N/A	N/A	32.457	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

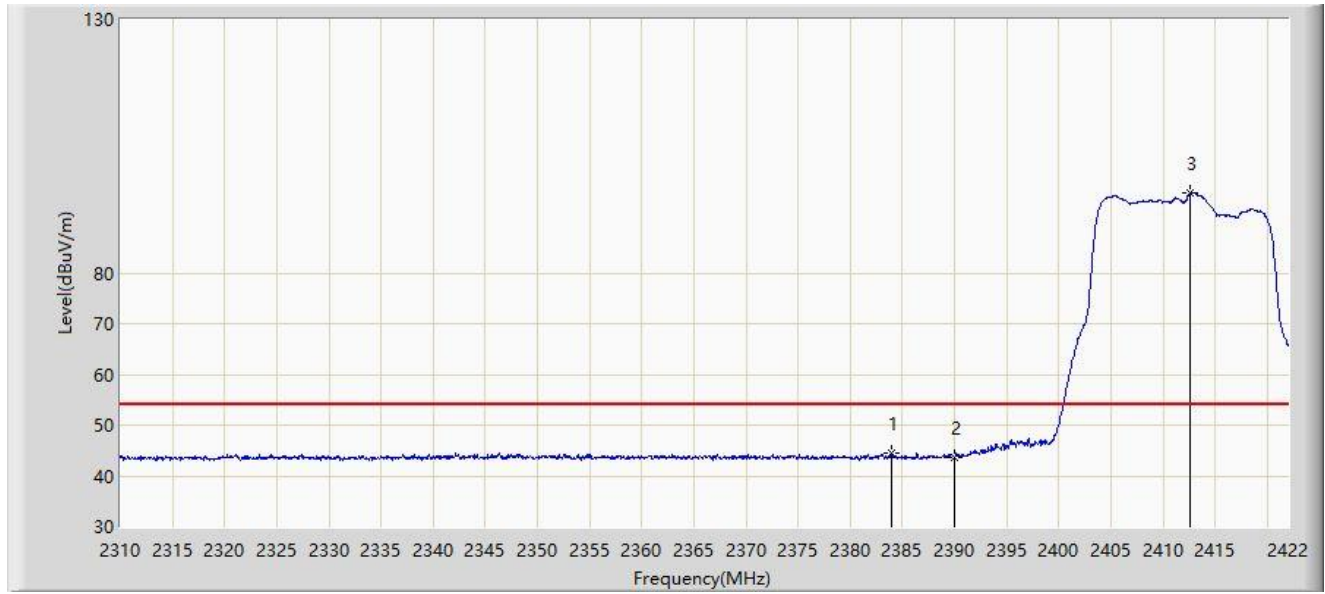


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2383.976	44.567	12.021	-9.433	54.000	32.546	AV
2		2390.000	43.694	11.168	-10.306	54.000	32.527	AV
3		2412.648	95.722	63.261	N/A	N/A	32.461	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2437MHz	

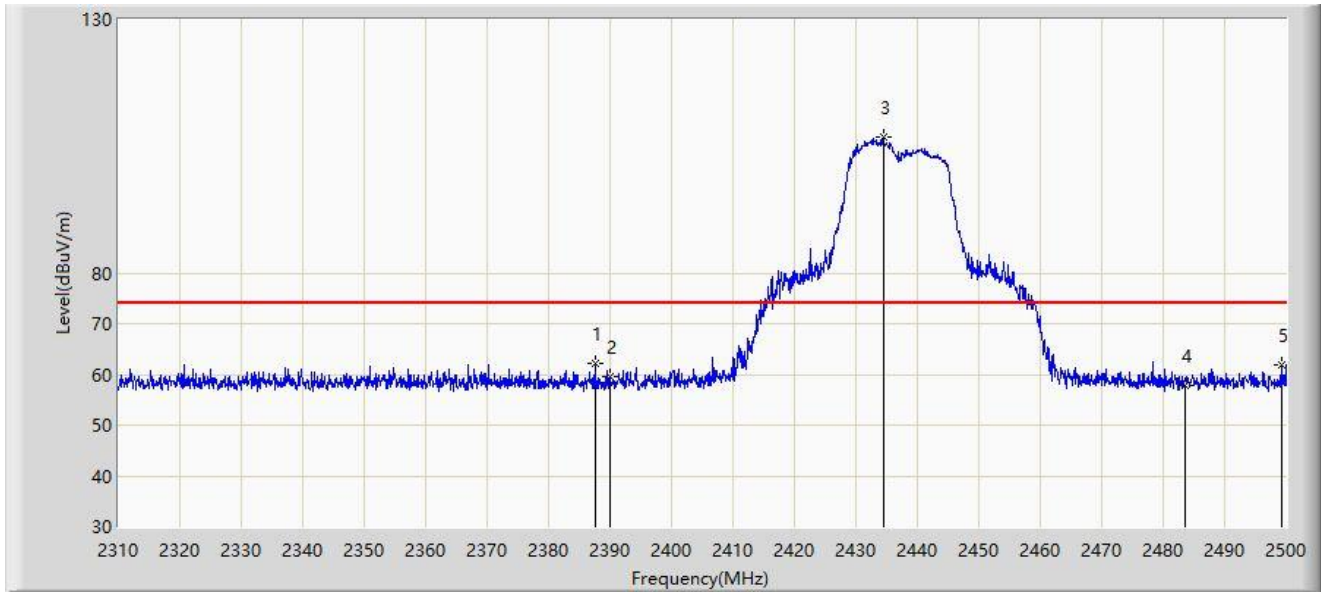


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2387.615	62.277	29.743	-11.723	74.000	32.534	PK
2		2390.000	59.483	26.957	-14.517	74.000	32.527	PK
3		2434.450	106.838	74.433	N/A	N/A	32.404	PK
4		2483.500	57.859	25.477	-16.141	74.000	32.382	PK
5		2499.335	61.895	29.490	-12.105	74.000	32.405	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2437MHz	

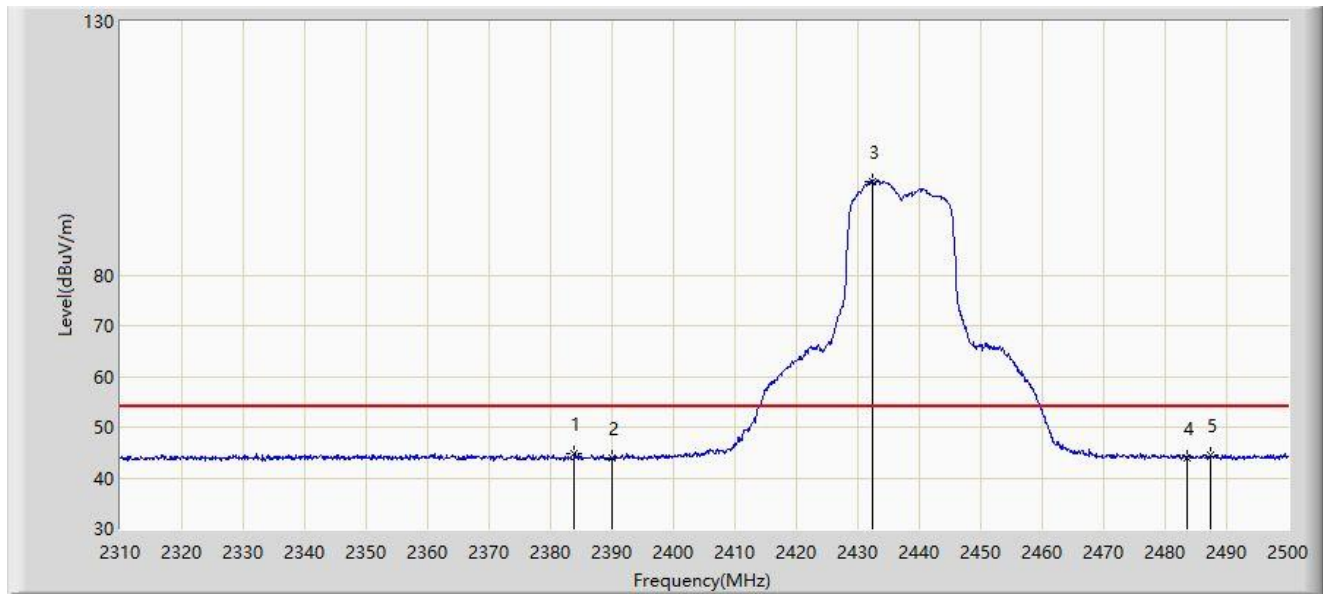


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2383.910	44.757	12.211	-9.243	54.000	32.546	AV
2		2390.000	43.957	11.431	-10.043	54.000	32.527	AV
3		2432.360	98.540	66.131	N/A	N/A	32.410	AV
4		2483.500	43.861	11.479	-10.139	54.000	32.382	AV
5		2487.270	44.447	12.066	-9.553	54.000	32.381	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2437MHz	

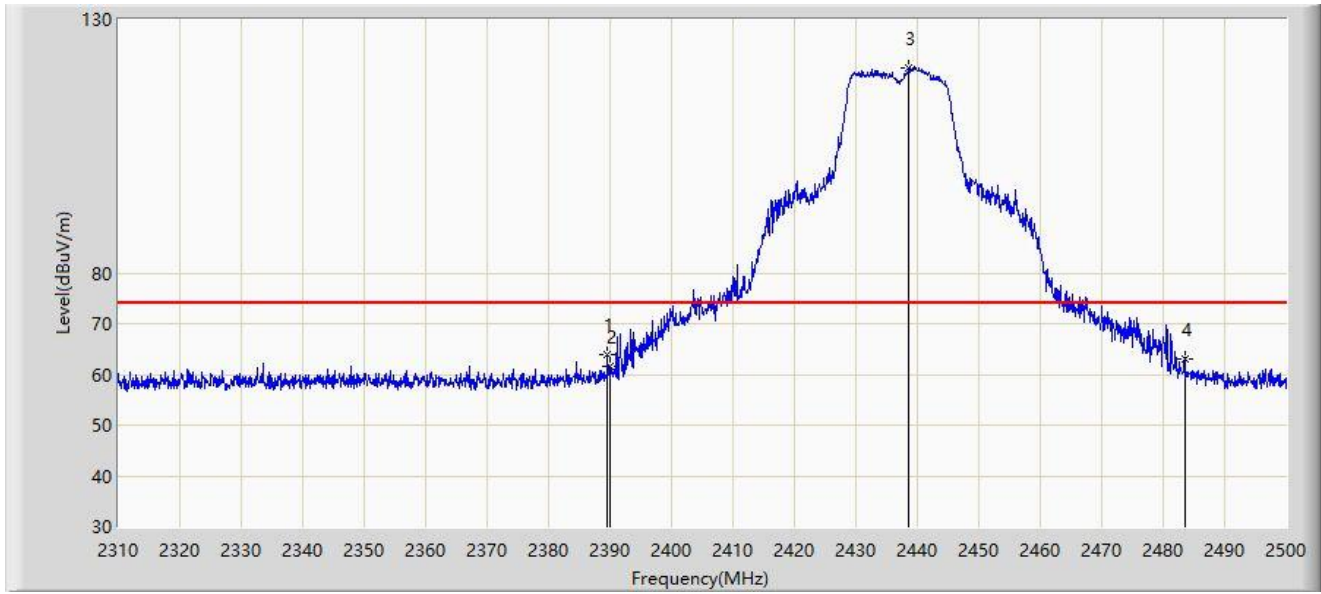


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.610	63.984	31.456	-10.016	74.000	32.528	PK
2		2390.000	61.473	28.947	-12.527	74.000	32.527	PK
3		2438.630	120.533	88.138	N/A	N/A	32.395	PK
4		2483.500	63.041	30.659	-10.959	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2437MHz	

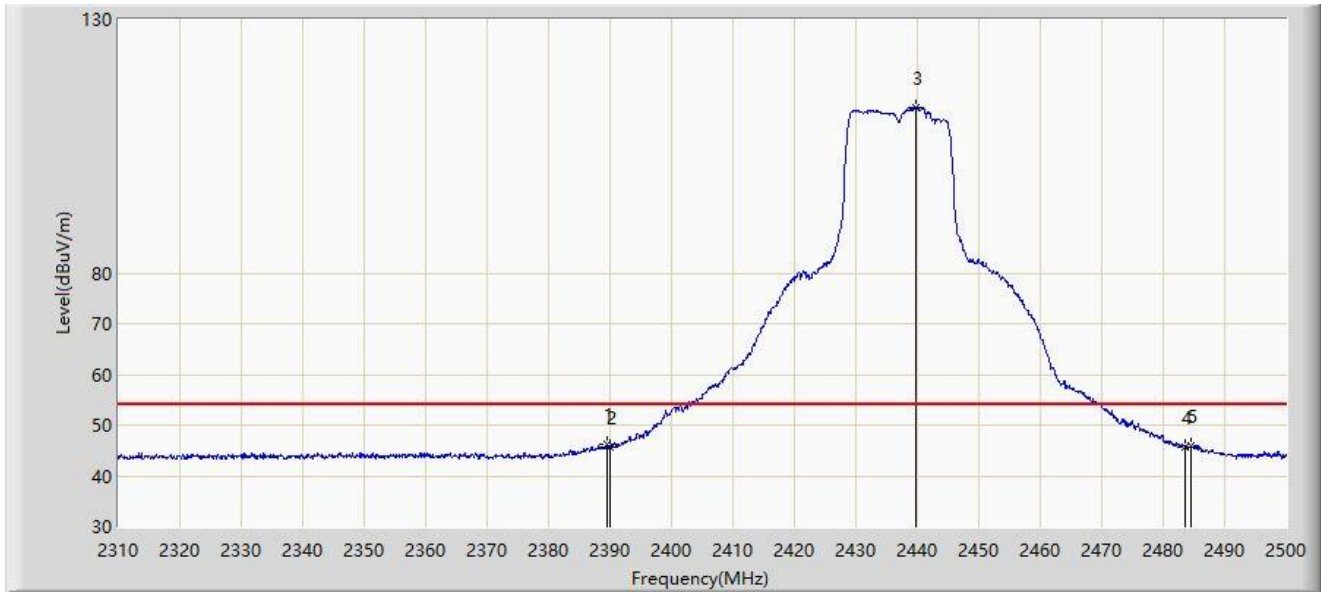


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.610	46.174	13.646	-7.826	54.000	32.528	AV
2		2390.000	45.772	13.246	-8.228	54.000	32.527	AV
3		2439.865	112.488	80.095	N/A	N/A	32.393	AV
4		2483.500	45.628	13.246	-8.372	54.000	32.382	AV
5		2484.515	46.045	13.663	-7.955	54.000	32.381	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-25
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2457MHz	

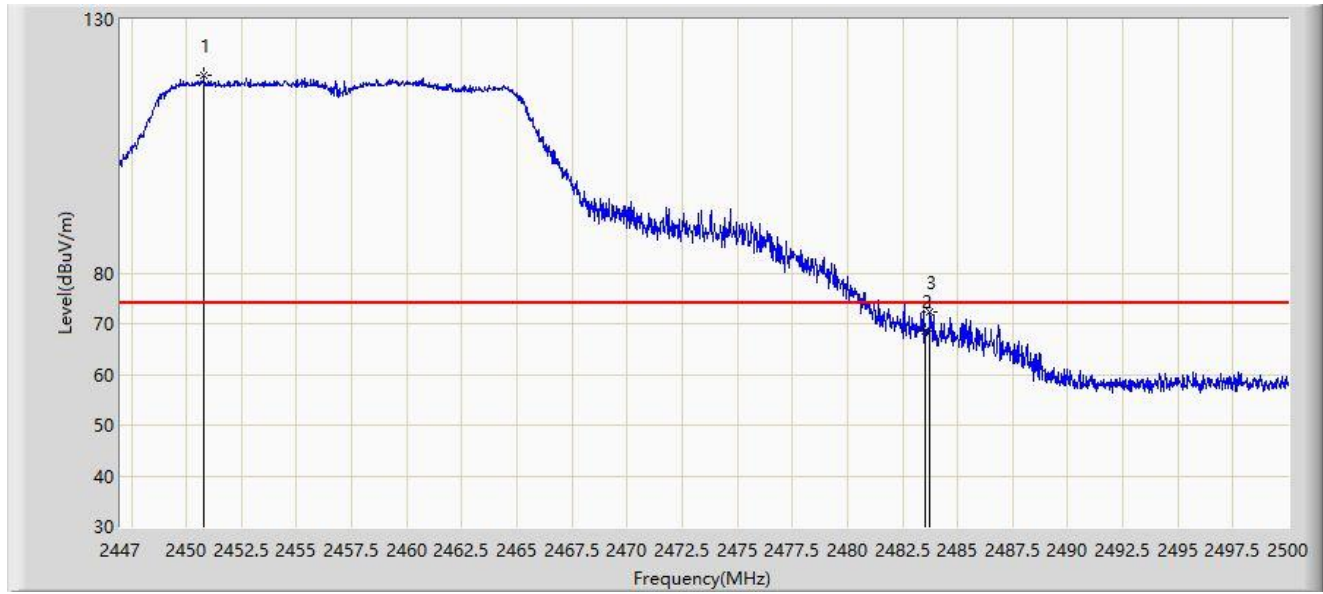


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2450.816	118.841	86.470	N/A	N/A	32.371	PK
2		2483.500	68.509	36.127	-5.491	74.000	32.382	PK
3	*	2483.756	72.213	39.831	-1.787	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-25
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2457MHz	

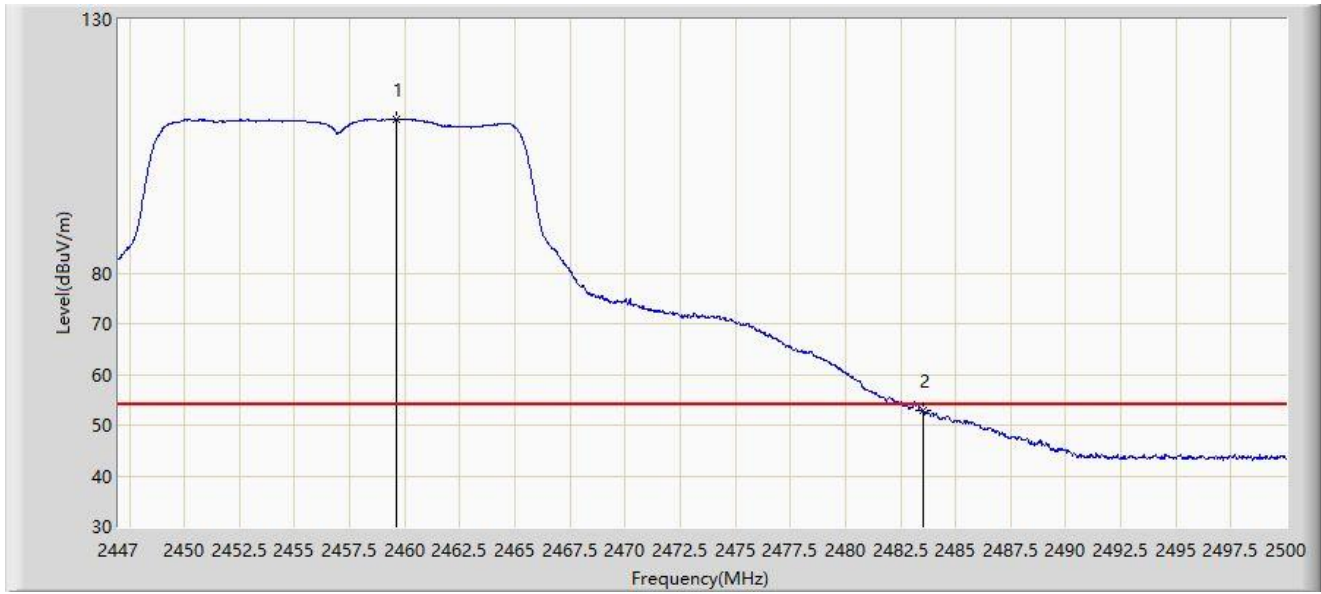


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2459.587	110.361	78.000	N/A	N/A	32.361	AV
2	*	2483.500	52.776	20.394	-1.224	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

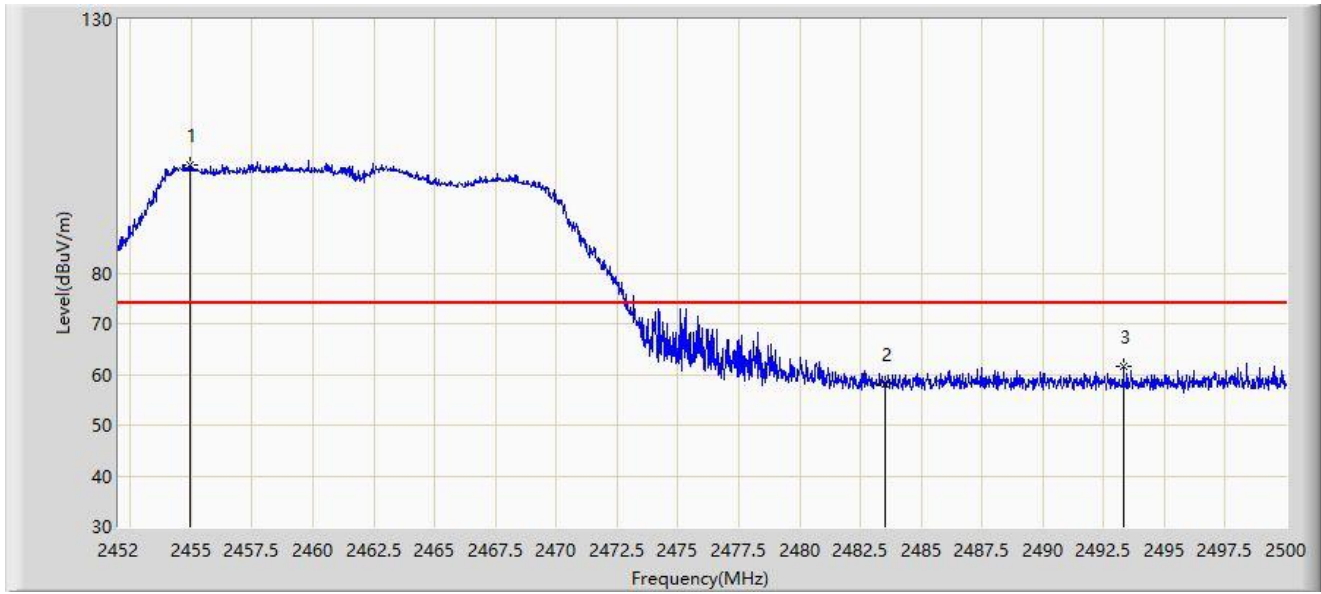

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2454.928	101.246	68.885	N/A	N/A	32.361	PK
2		2483.500	58.217	25.835	-15.783	74.000	32.382	PK
3	*	2493.328	61.567	29.184	-12.433	74.000	32.383	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2459.152	93.555	61.194	N/A	N/A	32.361	AV
2		2483.500	43.416	11.034	-10.584	54.000	32.382	AV
3	*	2492.464	44.195	11.815	-9.805	54.000	32.381	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

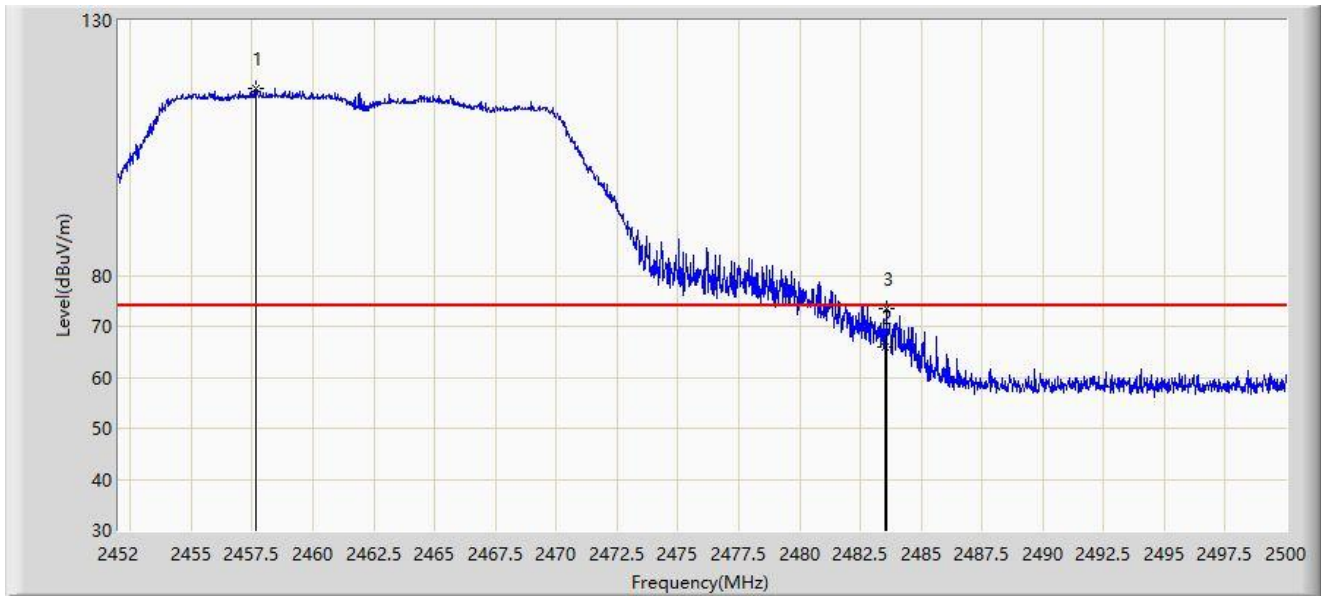

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2457.664	116.536	84.176	N/A	N/A	32.360	PK
2		2483.500	65.815	33.433	-8.185	74.000	32.382	PK
3	*	2483.560	73.414	41.032	-0.586	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2458.384	108.160	75.799	N/A	N/A	32.361	AV
2	*	2483.500	50.854	18.472	-3.146	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

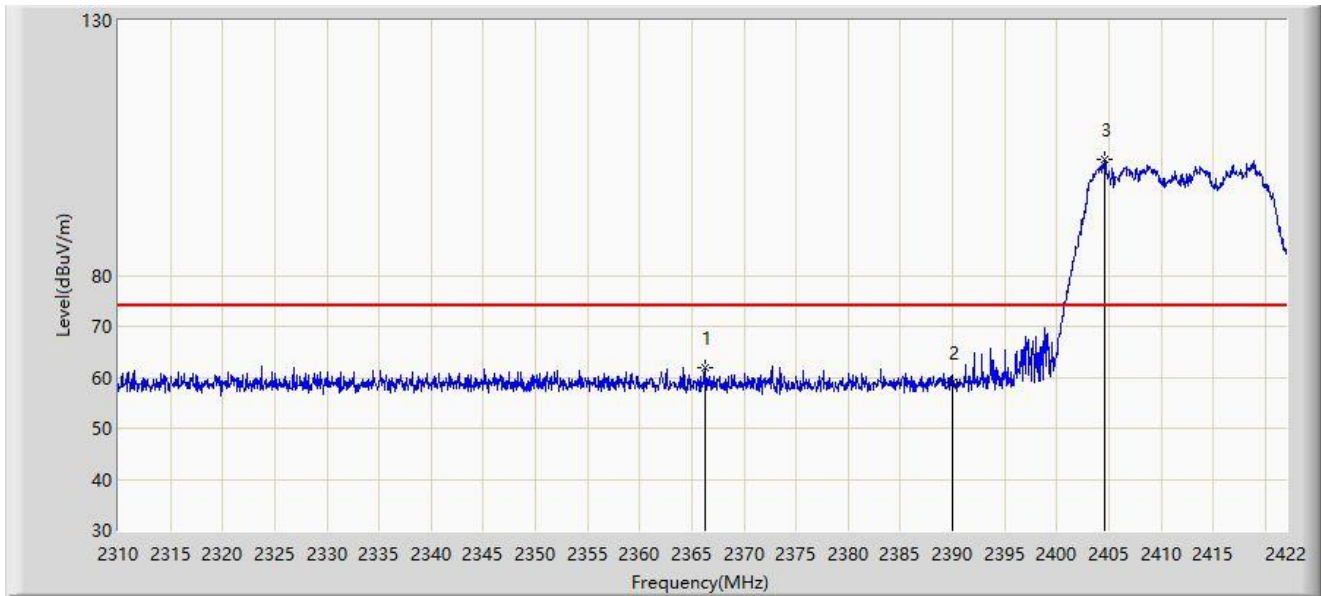


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2366.224	61.994	29.344	-12.006	74.000	32.650	PK
2		2390.000	59.044	26.518	-14.956	74.000	32.527	PK
3		2404.640	102.832	70.351	N/A	N/A	32.481	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

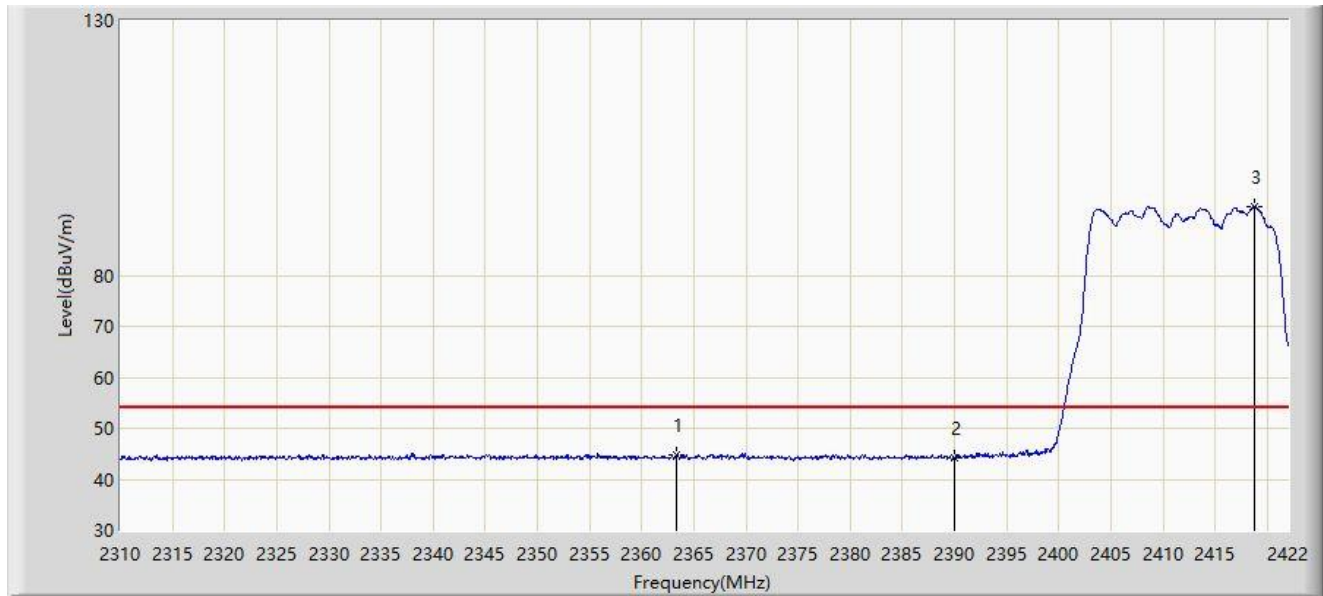


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2363.368	44.882	12.209	-9.118	54.000	32.673	AV
2		2390.000	44.275	11.749	-9.725	54.000	32.527	AV
3		2418.752	93.515	61.068	N/A	N/A	32.448	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

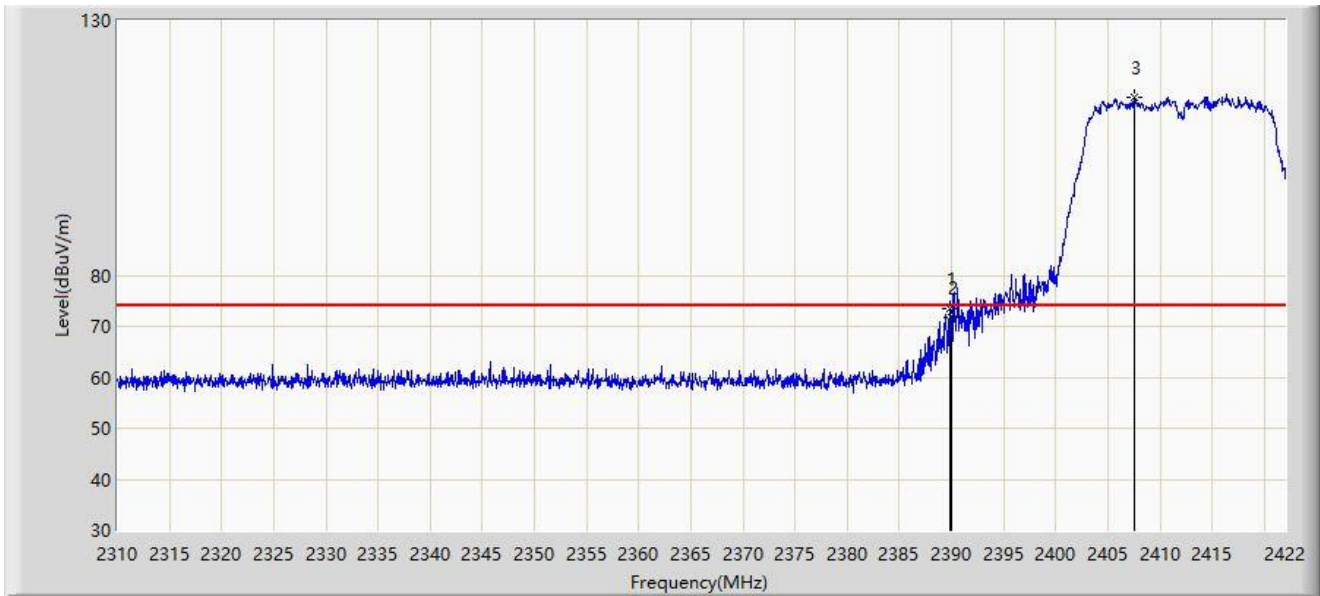


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.856	73.460	40.933	-0.540	74.000	32.527	PK
2		2390.000	71.775	39.249	-2.225	74.000	32.527	PK
3		2407.608	115.050	82.576	N/A	N/A	32.473	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

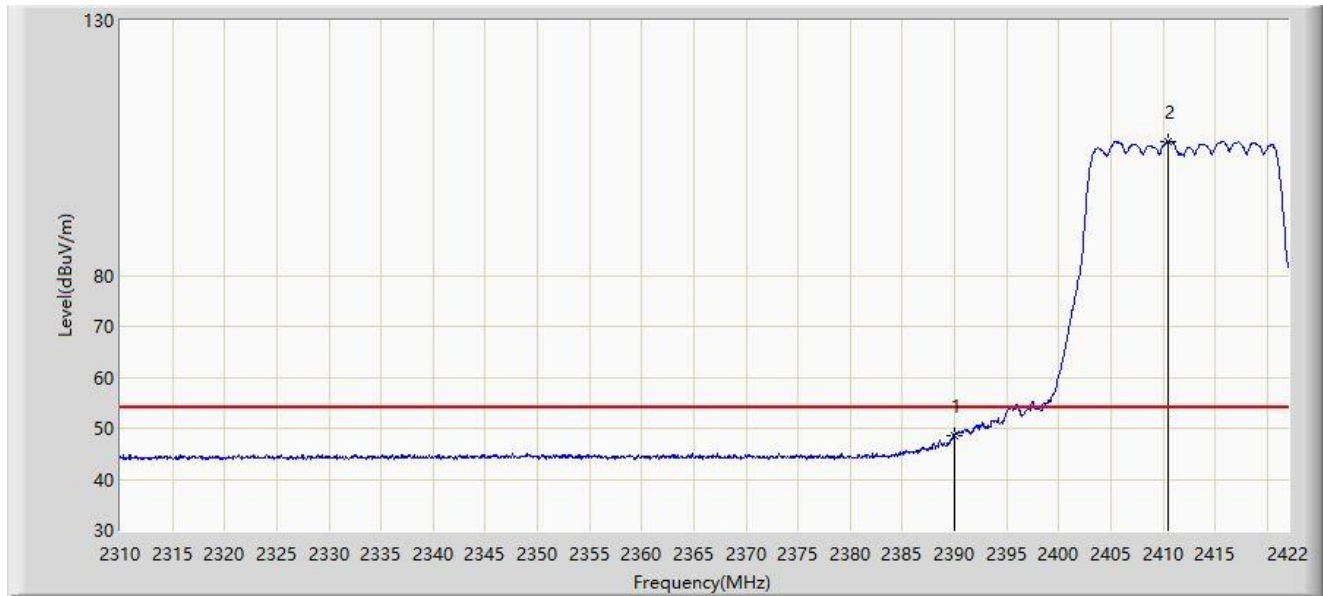


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	48.434	15.908	-5.566	54.000	32.527	AV
2		2410.464	106.294	73.828	N/A	N/A	32.466	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2417MHz	

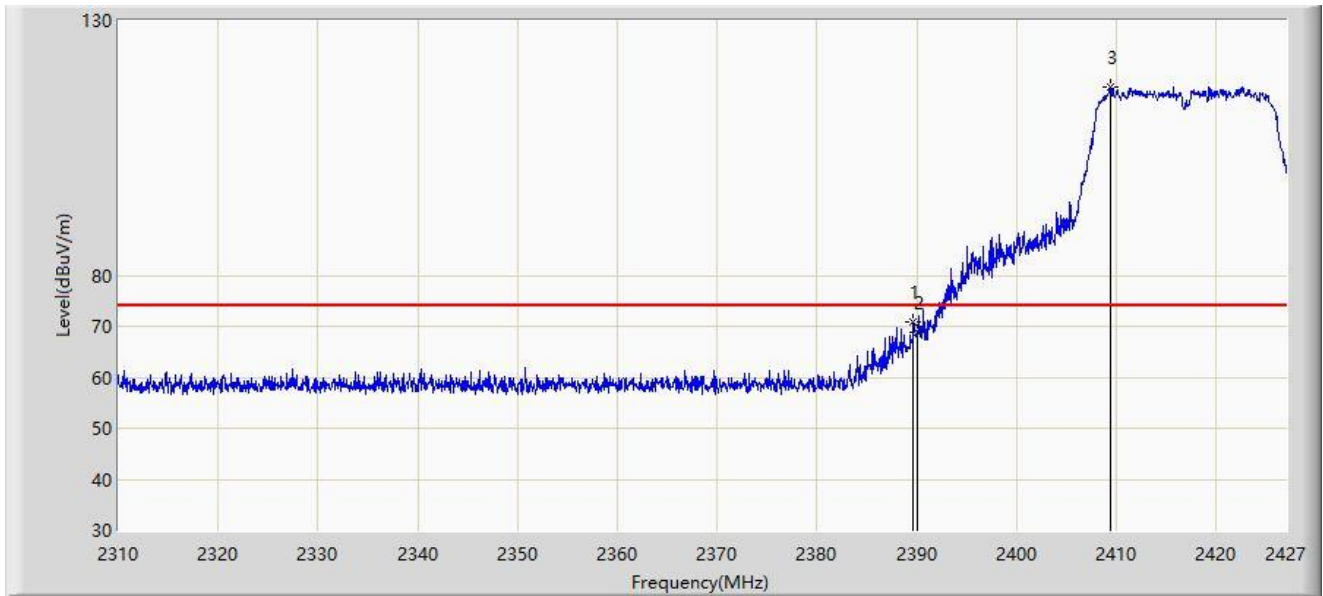


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.677	70.726	38.199	-3.274	74.000	32.528	PK
2		2390.000	68.723	36.197	-5.277	74.000	32.527	PK
3		2409.392	116.847	84.378	N/A	N/A	32.469	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2417MHz	

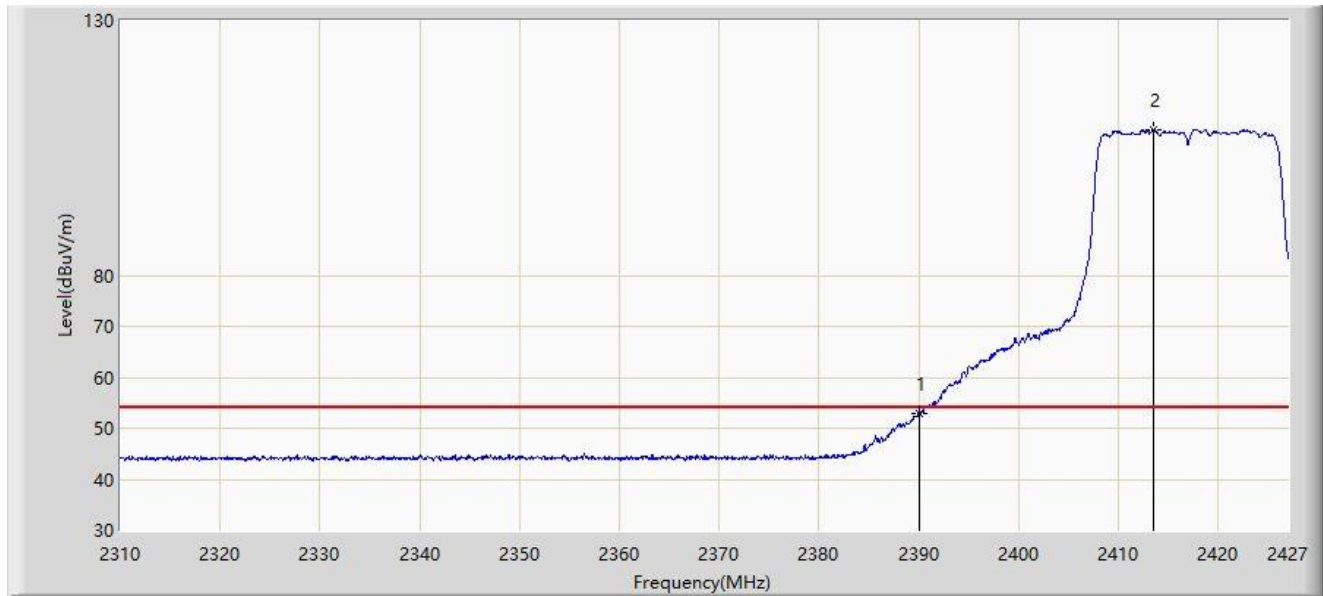


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	52.989	20.463	-1.011	54.000	32.527	AV
2		2413.487	108.528	76.069	N/A	N/A	32.460	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

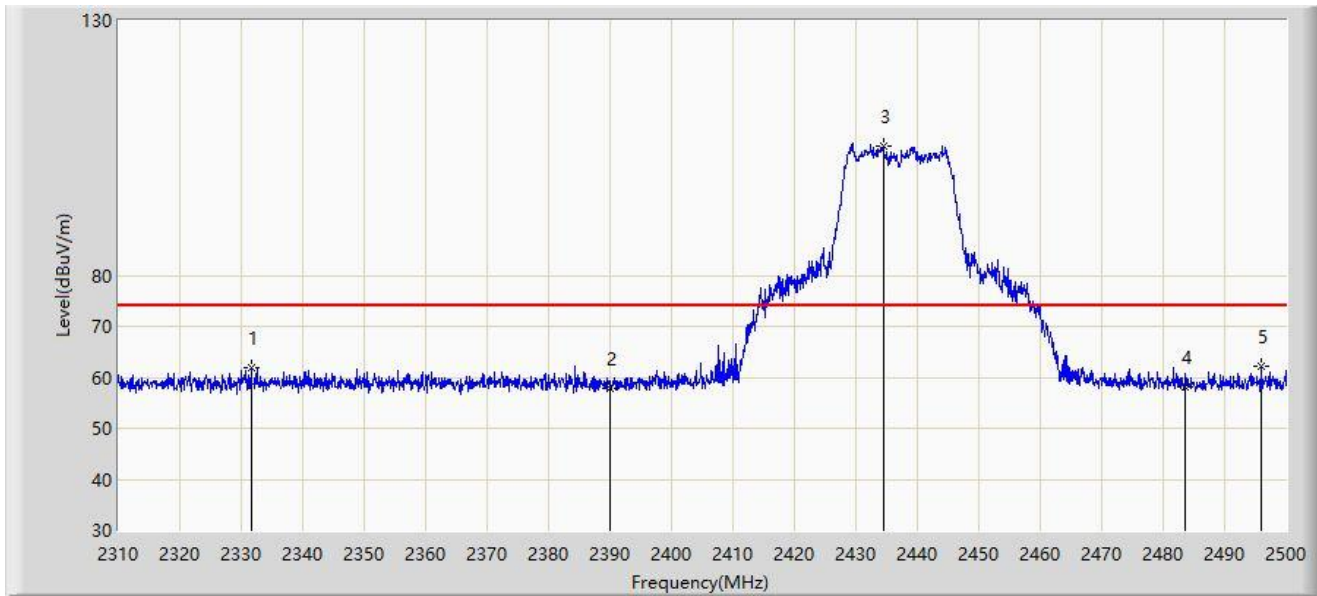


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2331.565	62.022	29.254	-11.978	74.000	32.768	PK
2		2390.000	57.852	25.326	-16.148	74.000	32.527	PK
3		2434.450	105.402	72.997	N/A	N/A	32.404	PK
4		2483.500	58.040	25.658	-15.960	74.000	32.382	PK
5	*	2495.915	62.121	29.730	-11.879	74.000	32.391	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

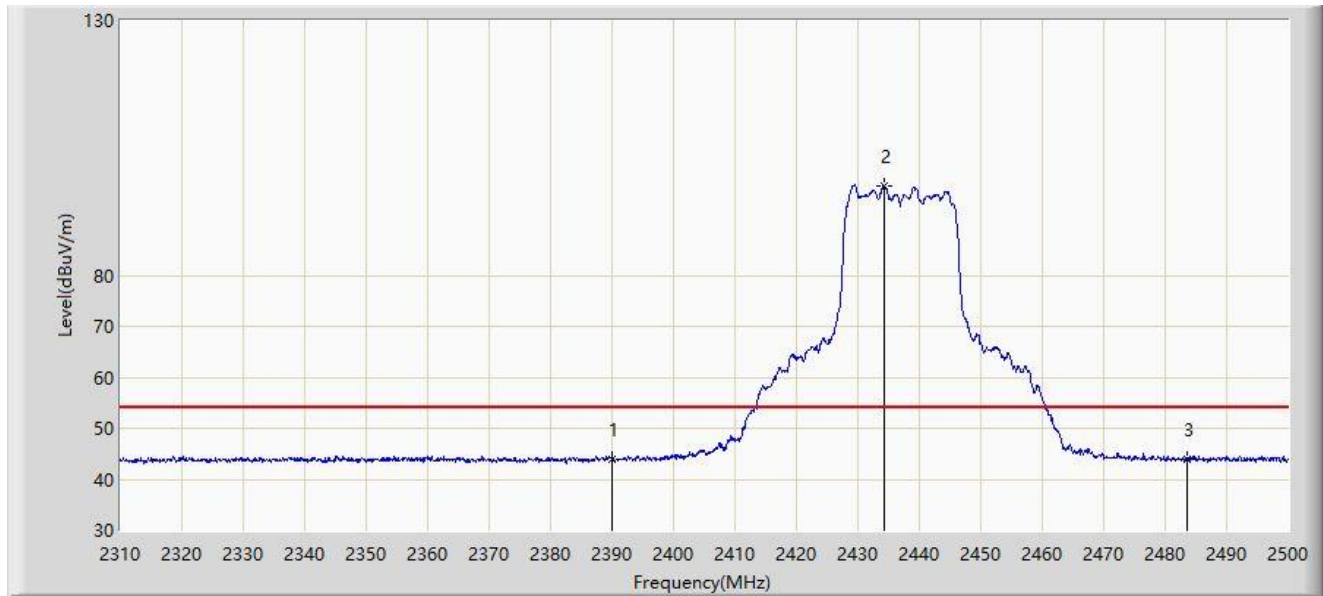


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2390.000	43.861	11.335	-10.139	54.000	32.527	AV
2		2434.260	97.611	65.206	N/A	N/A	32.405	AV
3	*	2483.500	43.994	11.612	-10.006	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

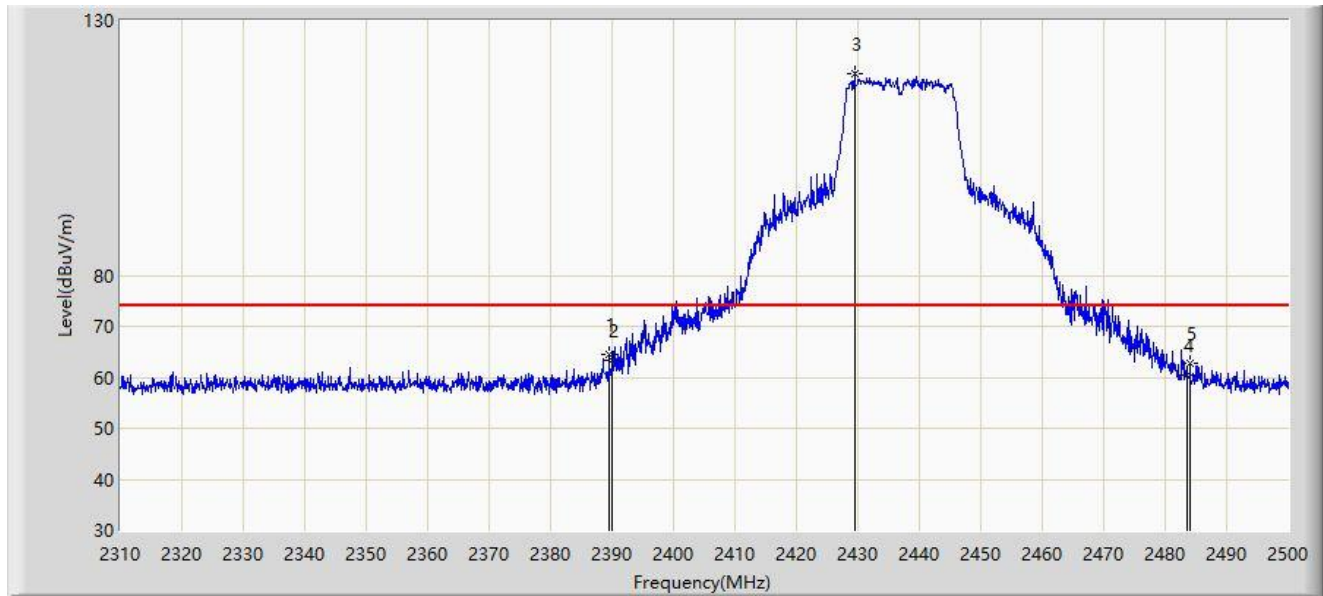


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.515	64.610	32.082	-9.390	74.000	32.528	PK
2		2390.000	63.385	30.859	-10.615	74.000	32.527	PK
3		2429.415	119.470	87.054	N/A	N/A	32.416	PK
4		2483.500	60.552	28.170	-13.448	74.000	32.382	PK
5		2484.040	62.794	30.412	-11.206	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2437MHz	

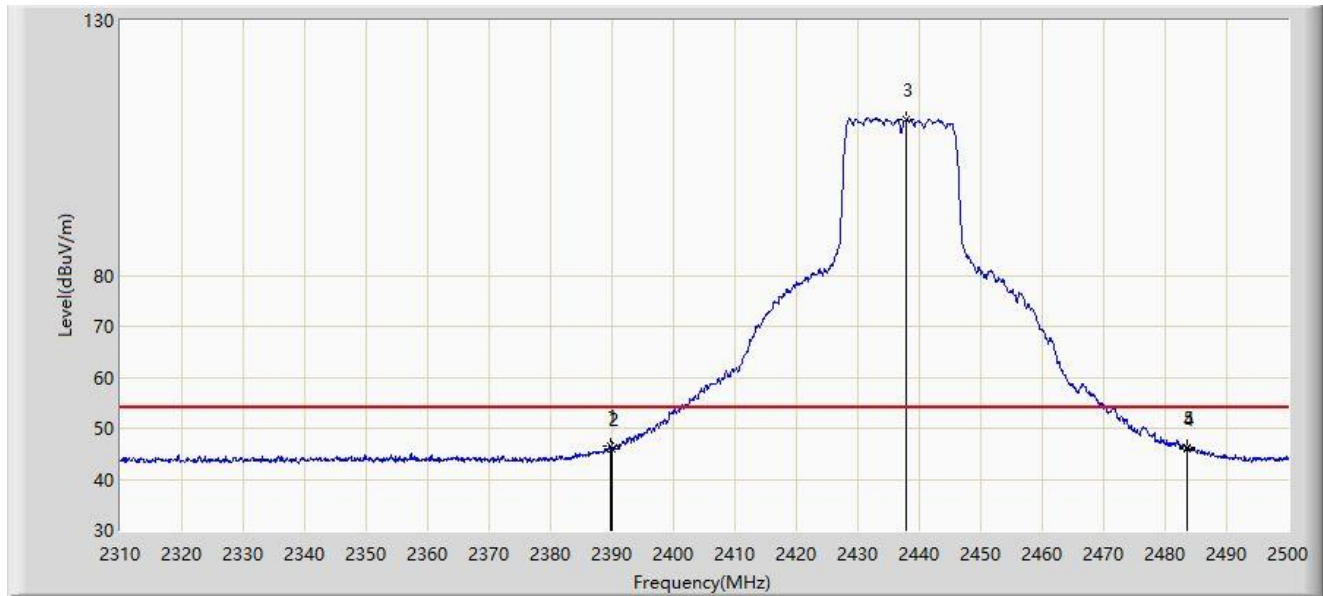


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.800	46.407	13.880	-7.593	54.000	32.527	AV
2		2390.000	45.827	13.301	-8.173	54.000	32.527	AV
3		2437.775	110.614	78.217	N/A	N/A	32.397	AV
4		2483.500	46.056	13.674	-7.944	54.000	32.382	AV
5		2483.565	46.295	13.913	-7.705	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2457MHz	

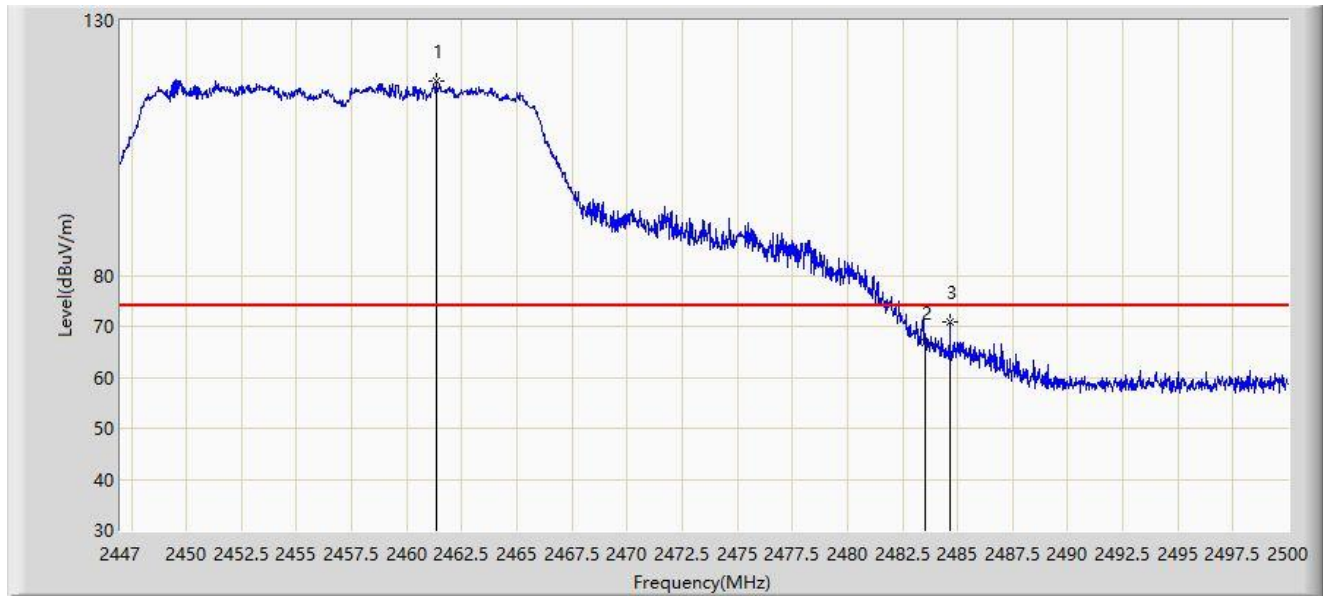


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2461.336	118.138	85.776	N/A	N/A	32.363	PK
2		2483.500	66.763	34.381	-7.237	74.000	32.382	PK
3	*	2484.656	70.867	38.485	-3.133	74.000	32.381	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2457MHz	

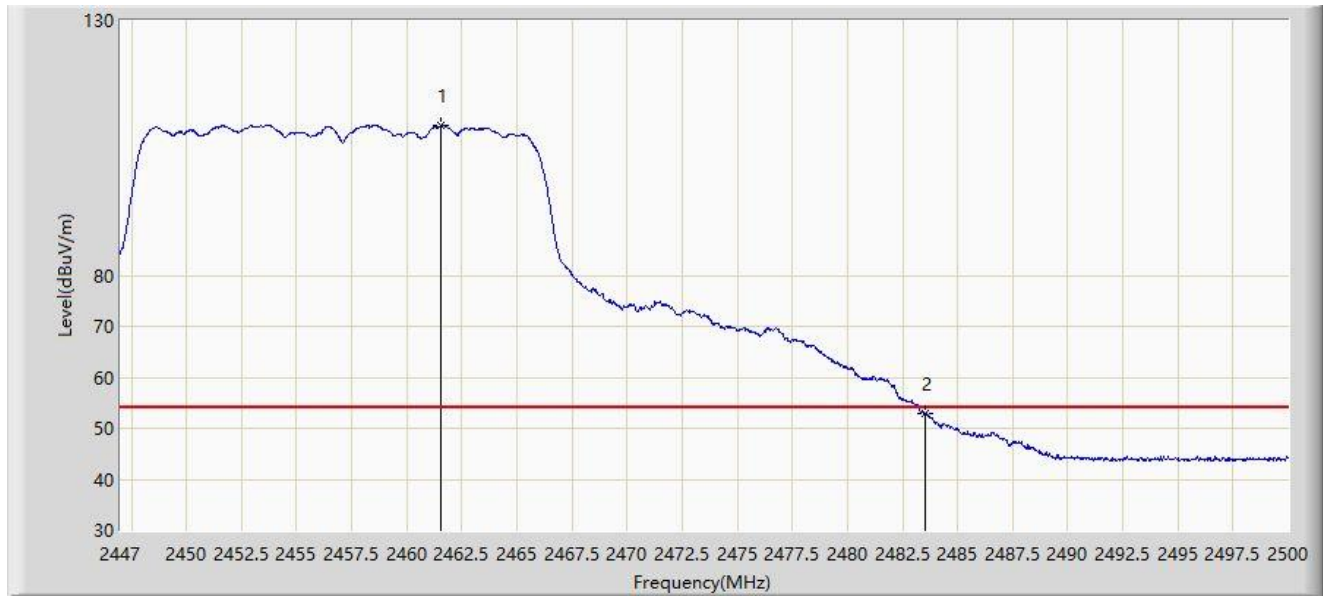


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2461.575	109.356	76.994	N/A	N/A	32.362	AV
2	*	2483.500	52.843	20.461	-1.157	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

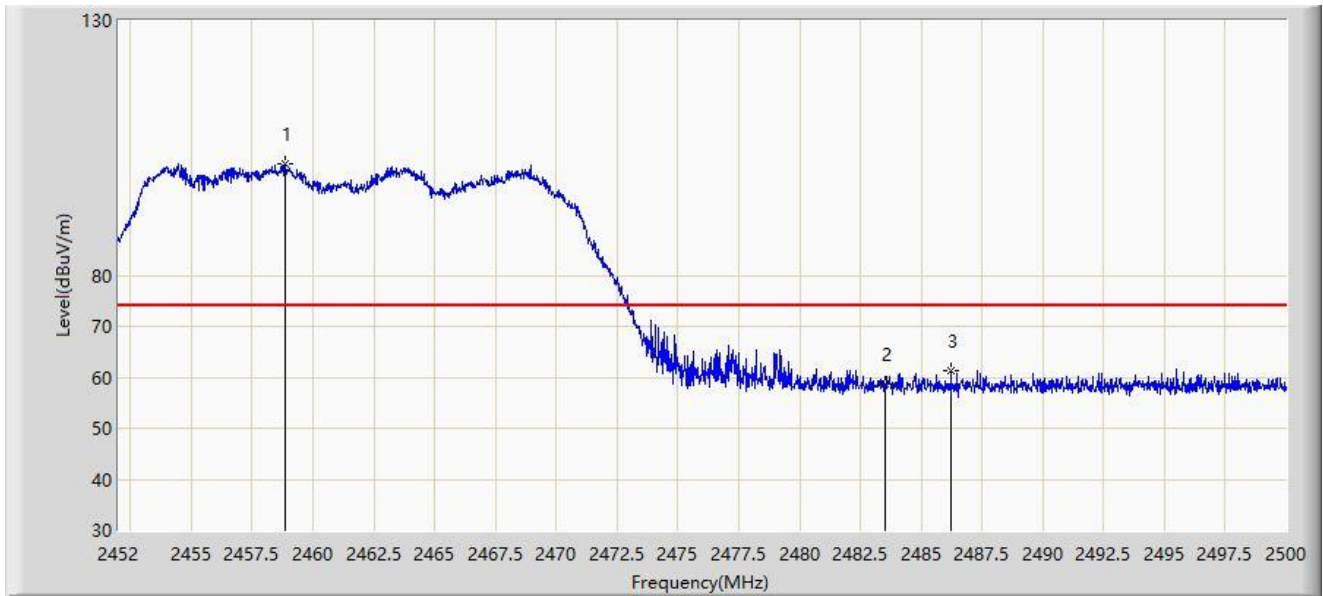


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2458.840	101.992	69.631	N/A	N/A	32.361	PK
2		2483.500	58.747	26.365	-15.253	74.000	32.382	PK
3	*	2486.224	61.200	28.819	-12.800	74.000	32.381	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

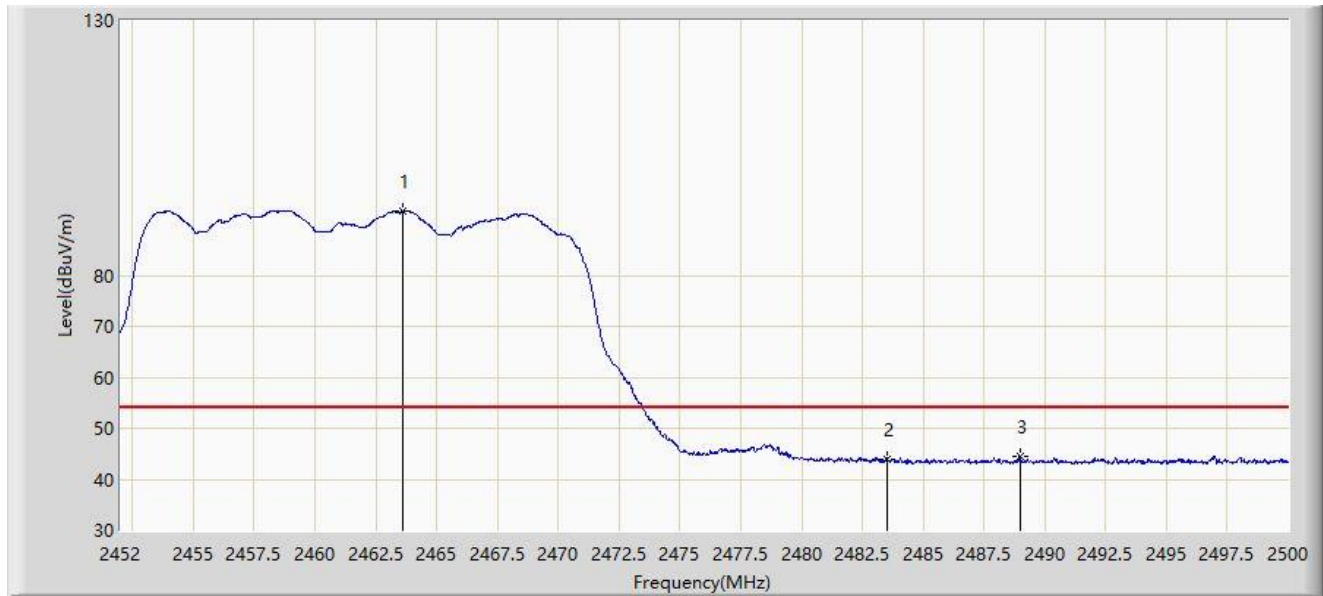


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2463.616	92.602	60.236	N/A	N/A	32.366	AV
2		2483.500	44.011	11.629	-9.989	54.000	32.382	AV
3	*	2488.984	44.461	12.081	-9.539	54.000	32.380	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

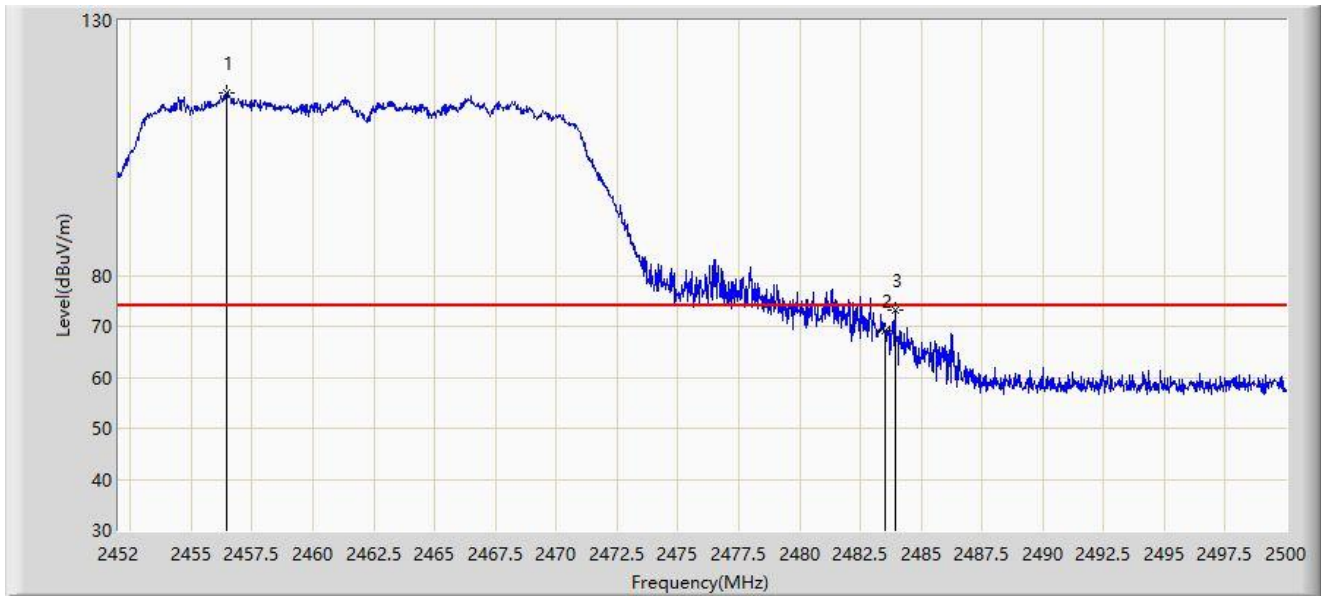


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2456.440	115.708	83.349	N/A	N/A	32.360	PK
2		2483.500	69.067	36.685	-4.933	74.000	32.382	PK
3	*	2483.920	73.307	40.925	-0.693	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

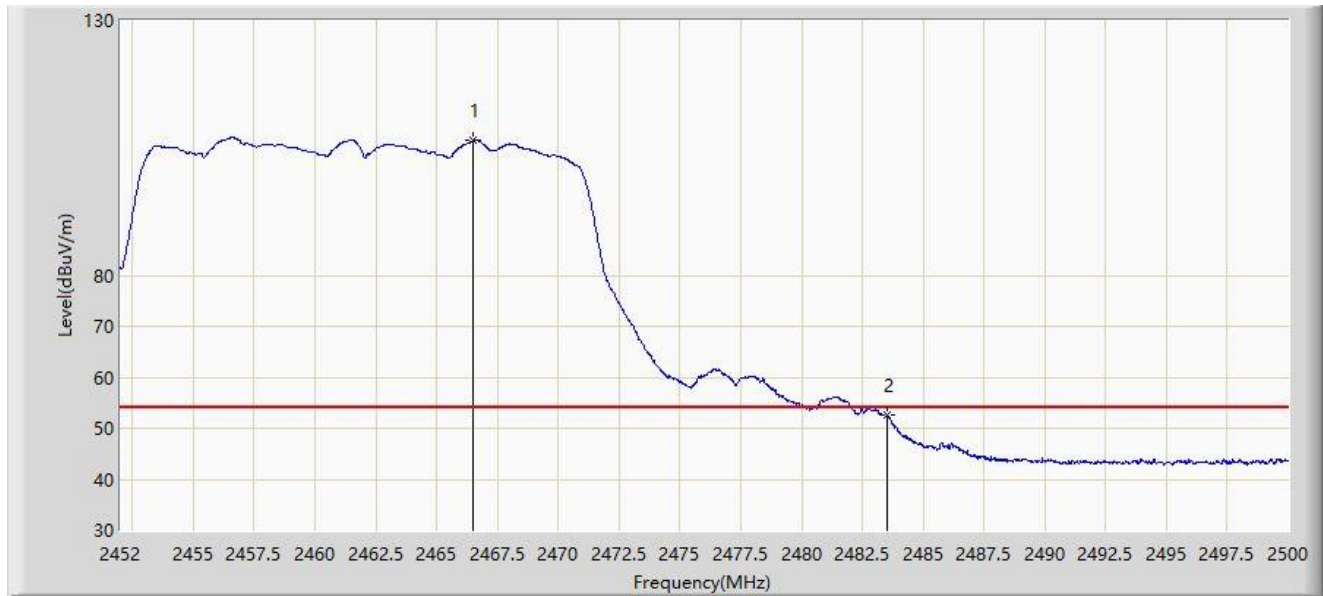


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2466.520	106.438	74.066	N/A	N/A	32.371	AV
2	*	2483.500	52.701	20.319	-1.299	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

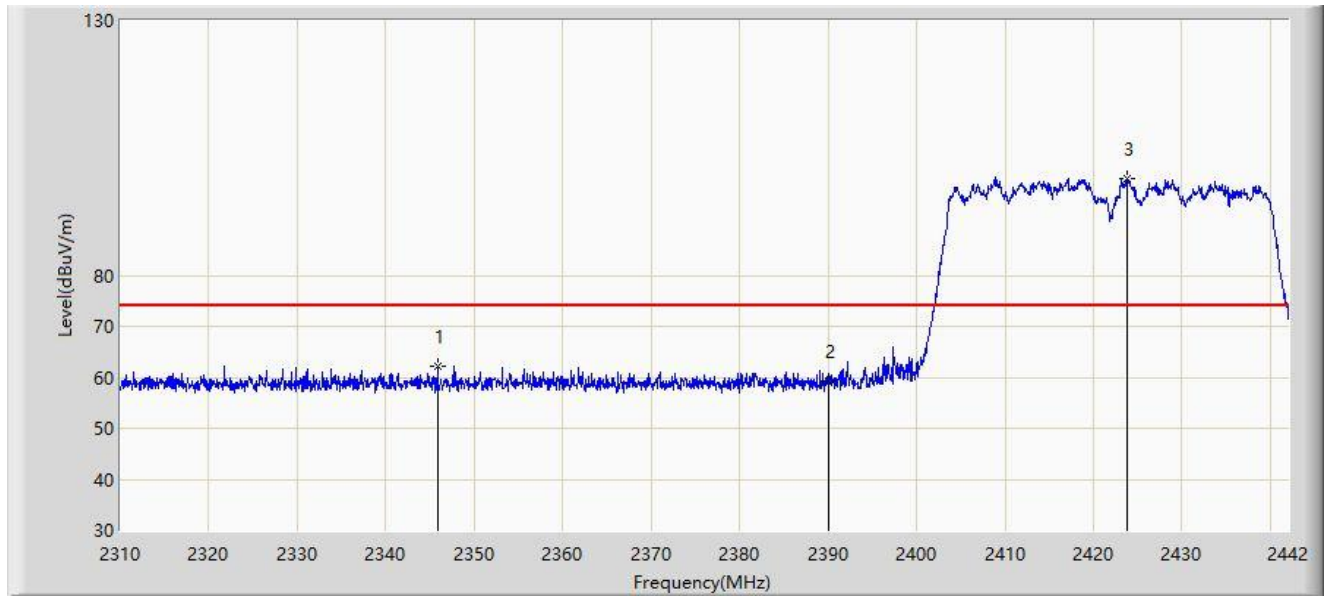


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2345.838	62.161	29.382	-11.839	74.000	32.779	PK
2		2390.000	59.184	26.658	-14.816	74.000	32.527	PK
3		2423.850	98.875	66.443	N/A	N/A	32.432	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

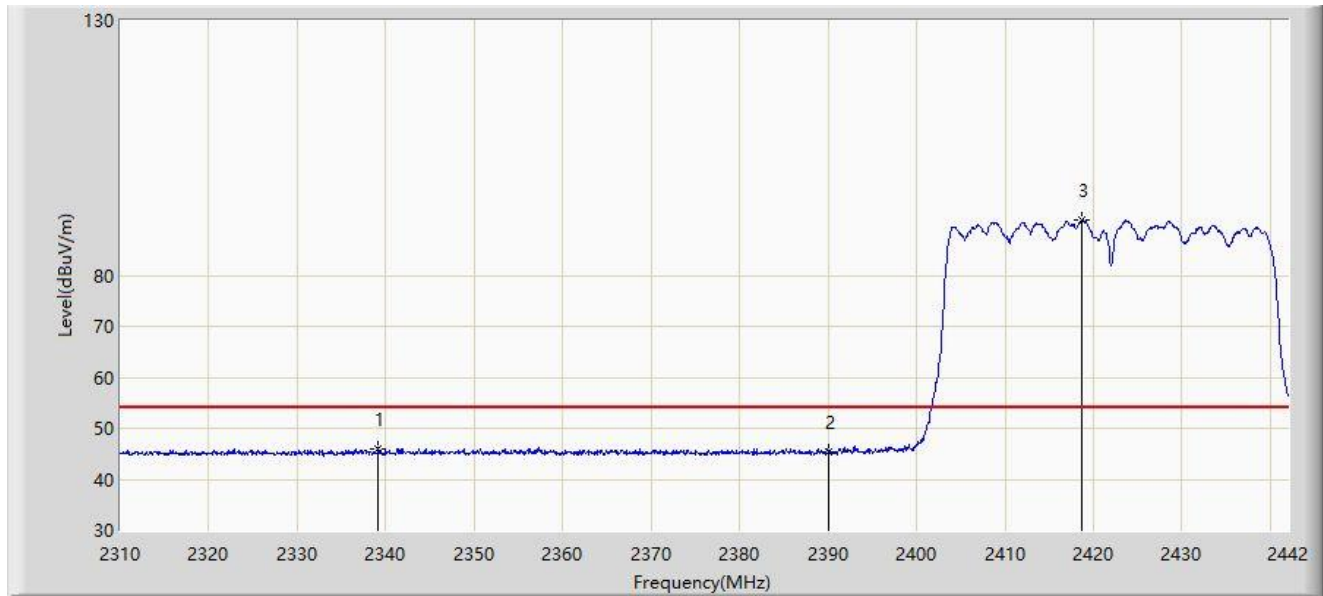


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2339.106	46.083	13.310	-7.917	54.000	32.774	AV
2		2390.000	45.387	12.861	-8.613	54.000	32.527	AV
3		2418.636	90.761	58.313	N/A	N/A	32.448	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

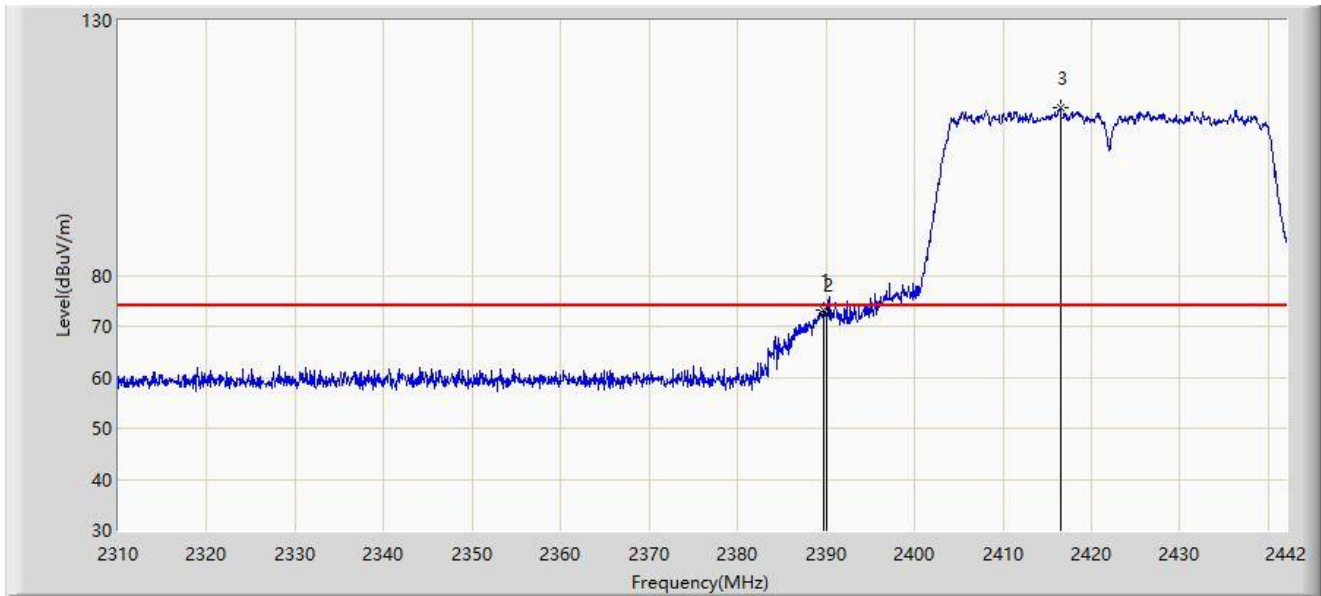


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.728	73.118	40.591	-0.882	74.000	32.528	PK
2		2390.000	72.245	39.719	-1.755	74.000	32.527	PK
3		2416.458	112.855	80.402	N/A	N/A	32.453	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

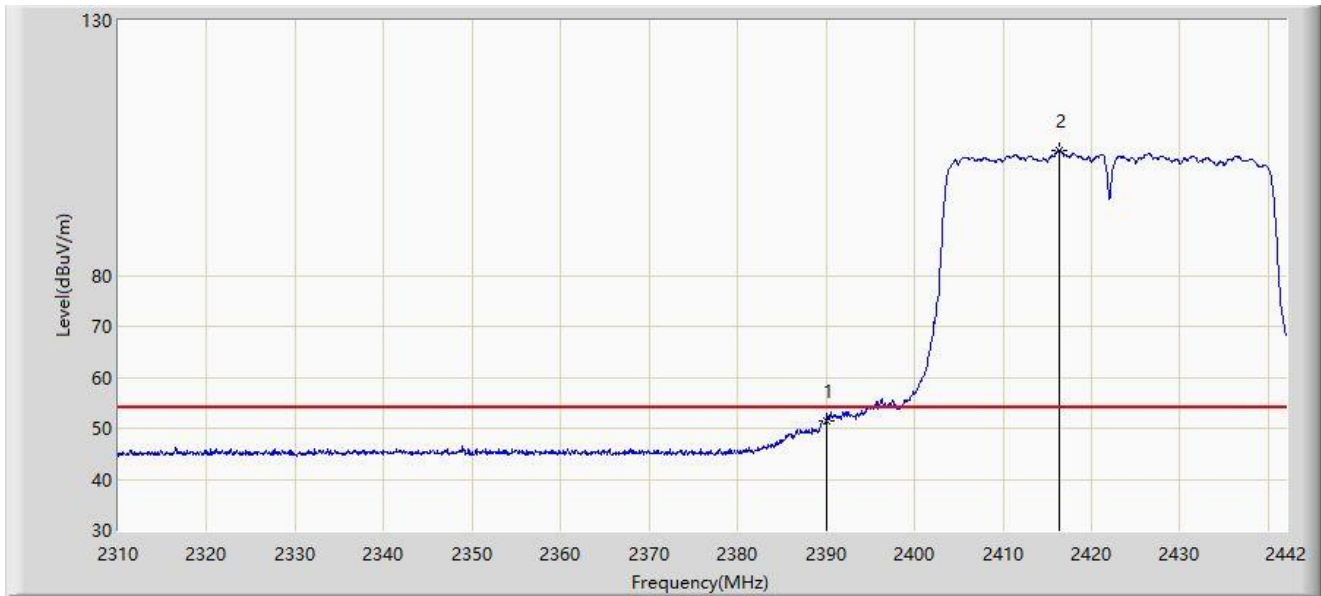


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	51.482	18.956	-2.518	54.000	32.527	AV
2		2416.326	104.390	71.937	N/A	N/A	32.453	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

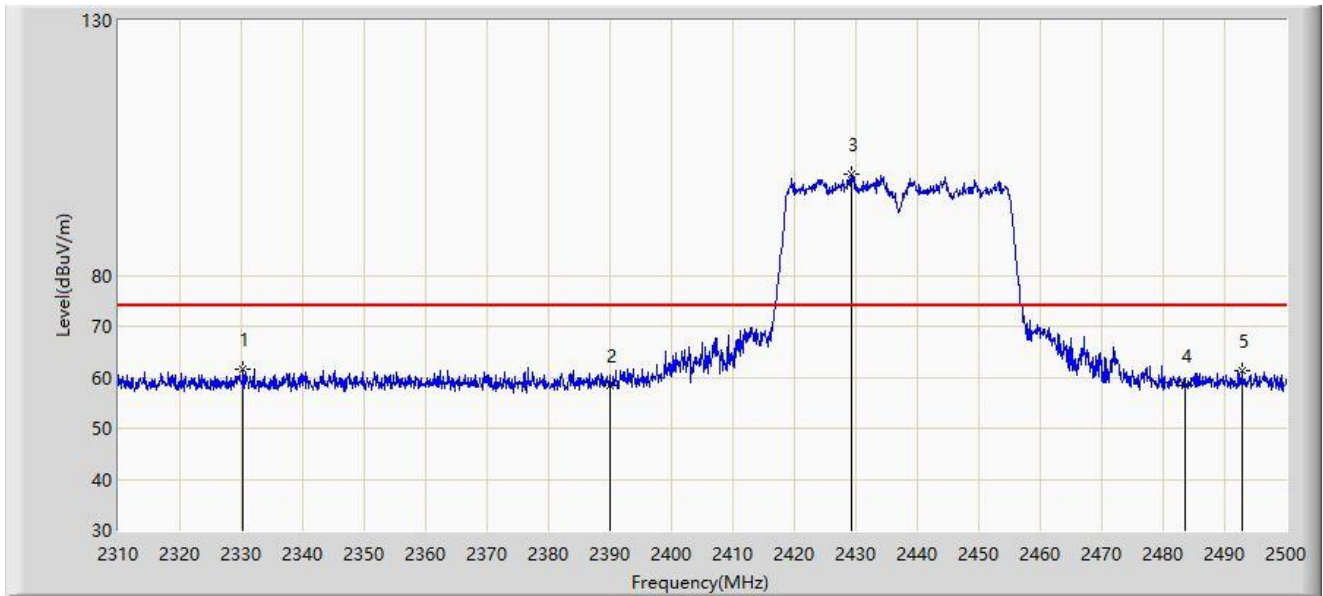


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2330.330	61.508	28.741	-12.492	74.000	32.768	PK
2		2390.000	58.356	25.830	-15.644	74.000	32.527	PK
3		2429.225	99.997	67.581	N/A	N/A	32.416	PK
4		2483.500	58.374	25.992	-15.626	74.000	32.382	PK
5		2492.875	61.232	28.850	-12.768	74.000	32.381	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

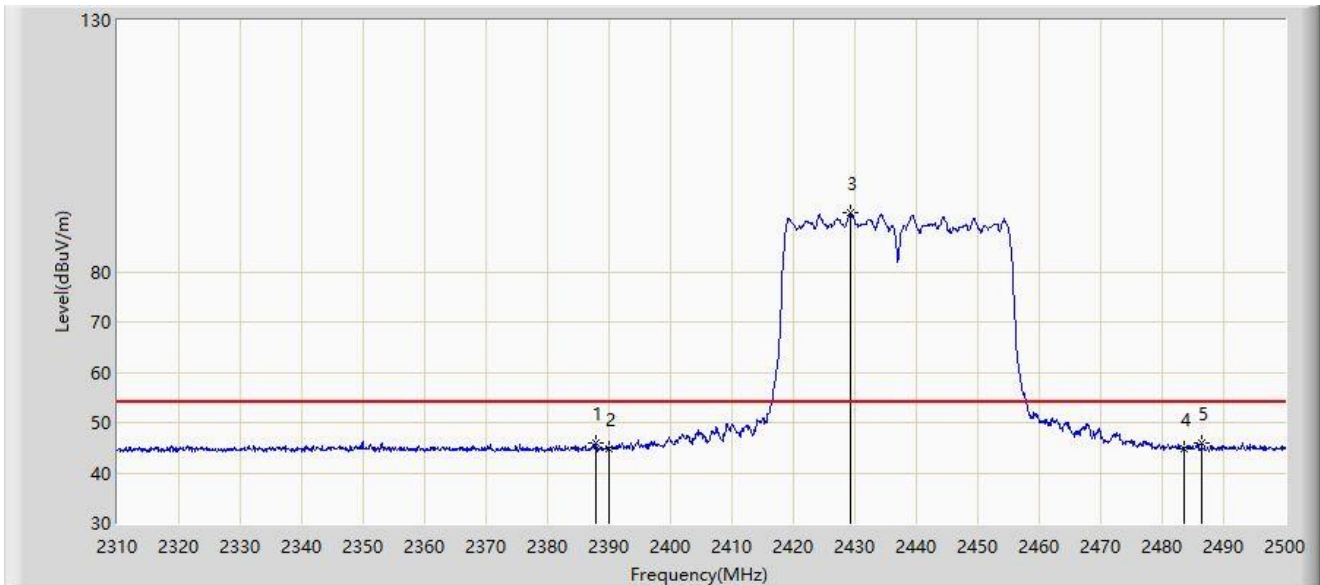


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2387.805	45.889	13.356	-8.111	54.000	32.533	AV
2		2390.000	44.923	12.397	-9.077	54.000	32.527	AV
3		2429.225	91.699	59.283	N/A	N/A	32.416	AV
4		2483.500	44.918	12.536	-9.082	54.000	32.382	AV
5	*	2486.415	45.907	13.526	-8.093	54.000	32.381	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

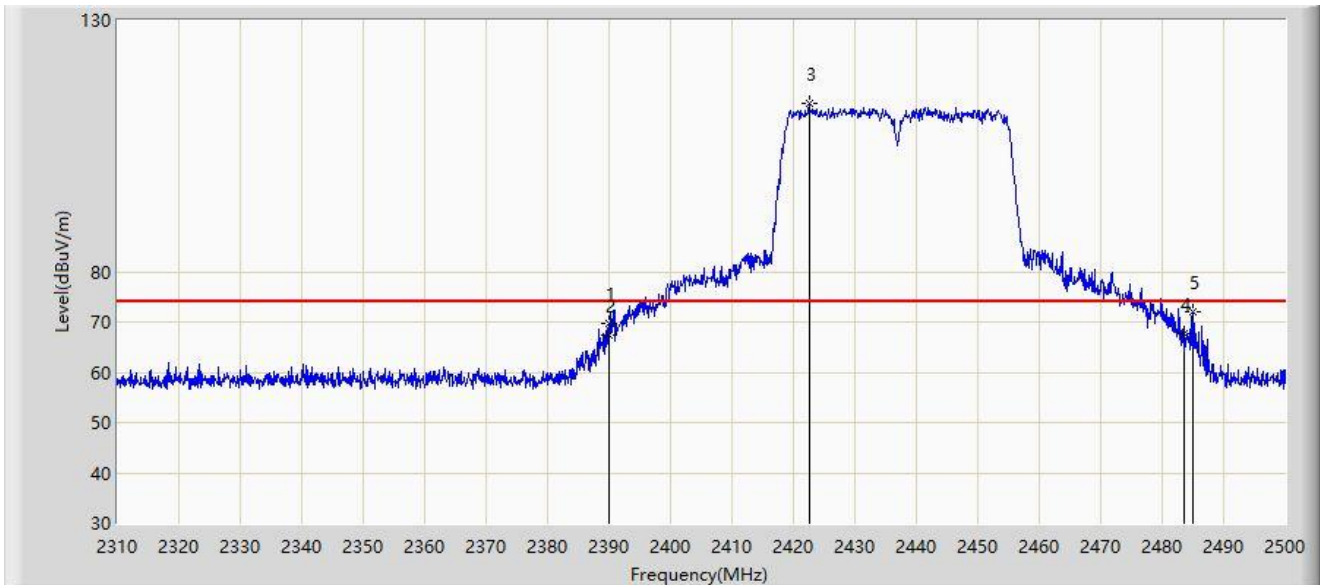


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2389.895	69.766	37.239	-4.234	74.000	32.527	PK
2		2390.000	67.347	34.821	-6.653	74.000	32.527	PK
3		2422.575	113.374	80.938	N/A	N/A	32.436	PK
4		2483.500	67.677	35.295	-6.323	74.000	32.382	PK
5	*	2484.895	72.139	39.757	-1.861	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

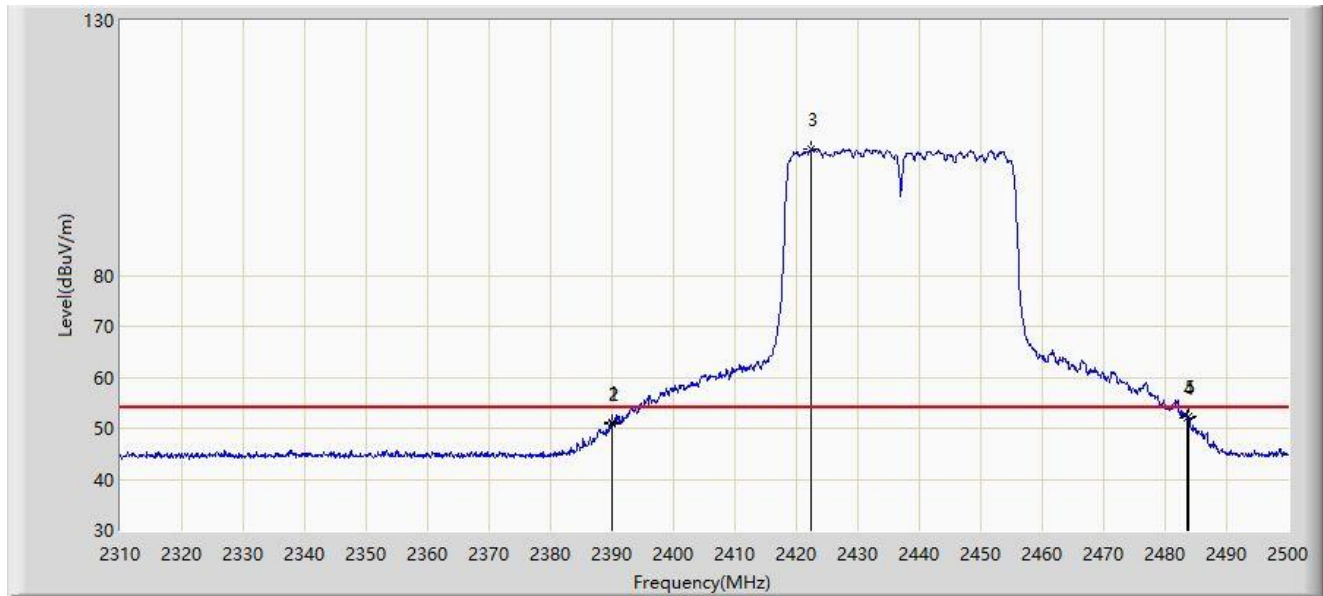


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2389.990	51.056	18.530	-2.944	54.000	32.527	AV
2		2390.000	50.995	18.469	-3.005	54.000	32.527	AV
3		2422.480	104.709	72.272	N/A	N/A	32.437	AV
4		2483.500	52.132	19.750	-1.868	54.000	32.382	AV
5	*	2483.850	52.392	20.010	-1.608	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2447MHz	

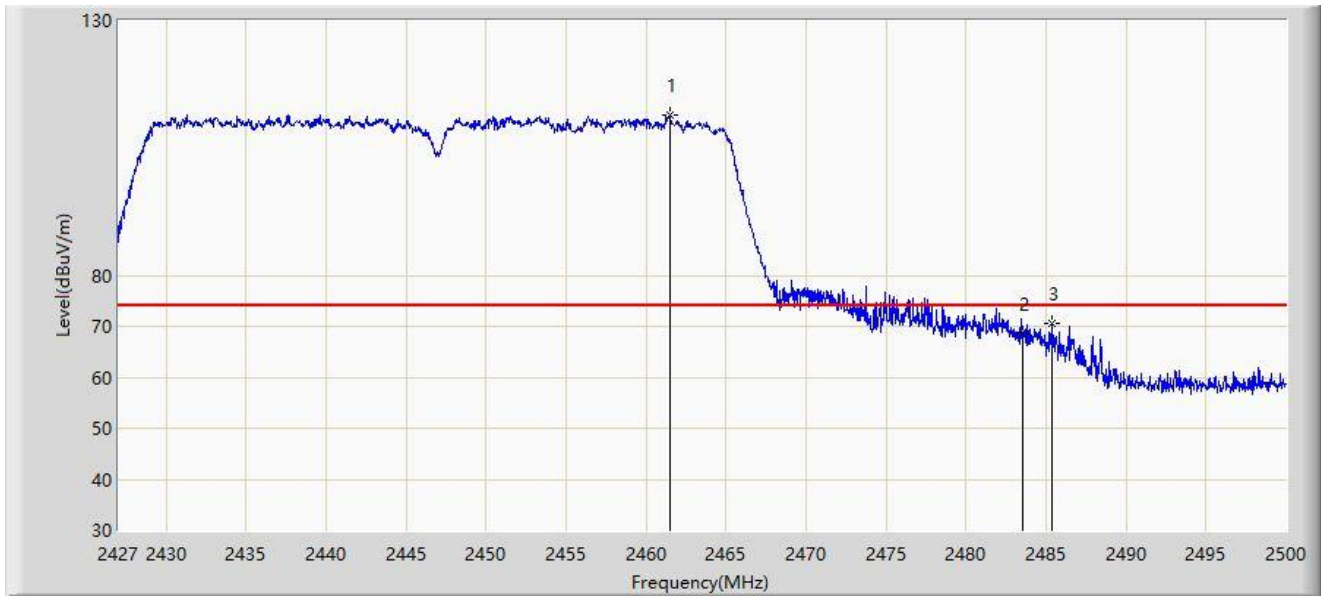


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2461.456	111.544	79.182	N/A	N/A	32.362	PK
2		2483.500	68.651	36.269	-5.349	74.000	32.382	PK
3	*	2485.327	70.653	38.271	-3.347	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2447MHz	

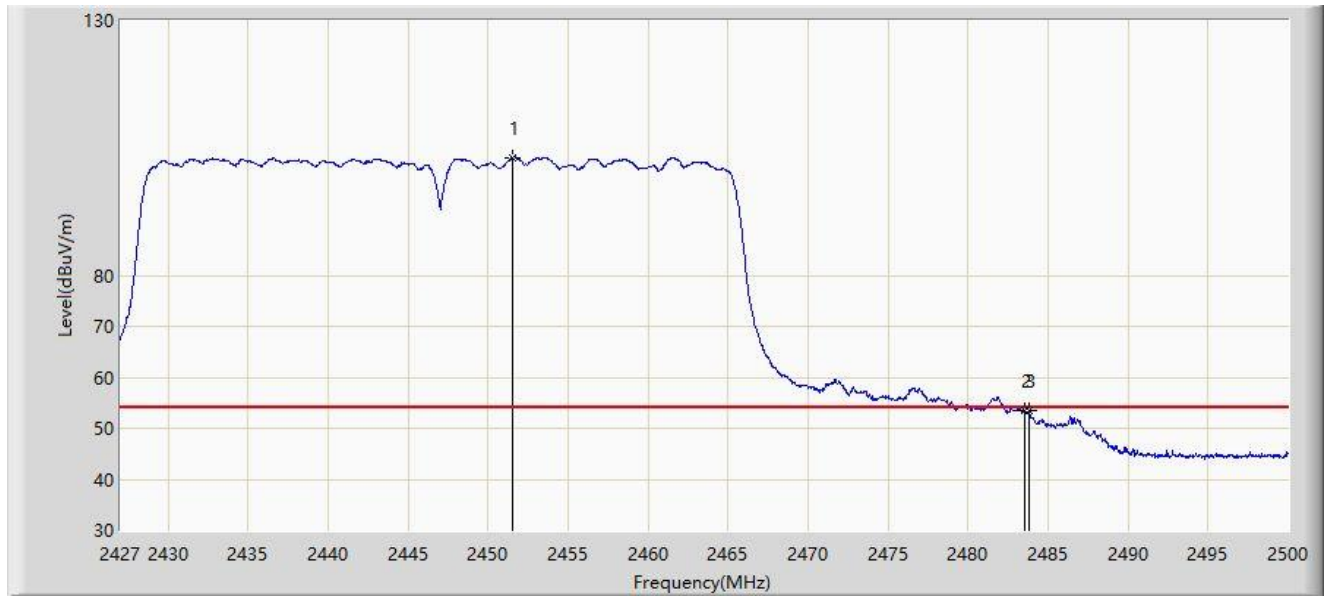


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2451.528	103.184	70.815	N/A	N/A	32.369	AV
2		2483.500	53.337	20.955	-0.663	54.000	32.382	AV
3	*	2483.794	53.449	21.067	-0.551	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

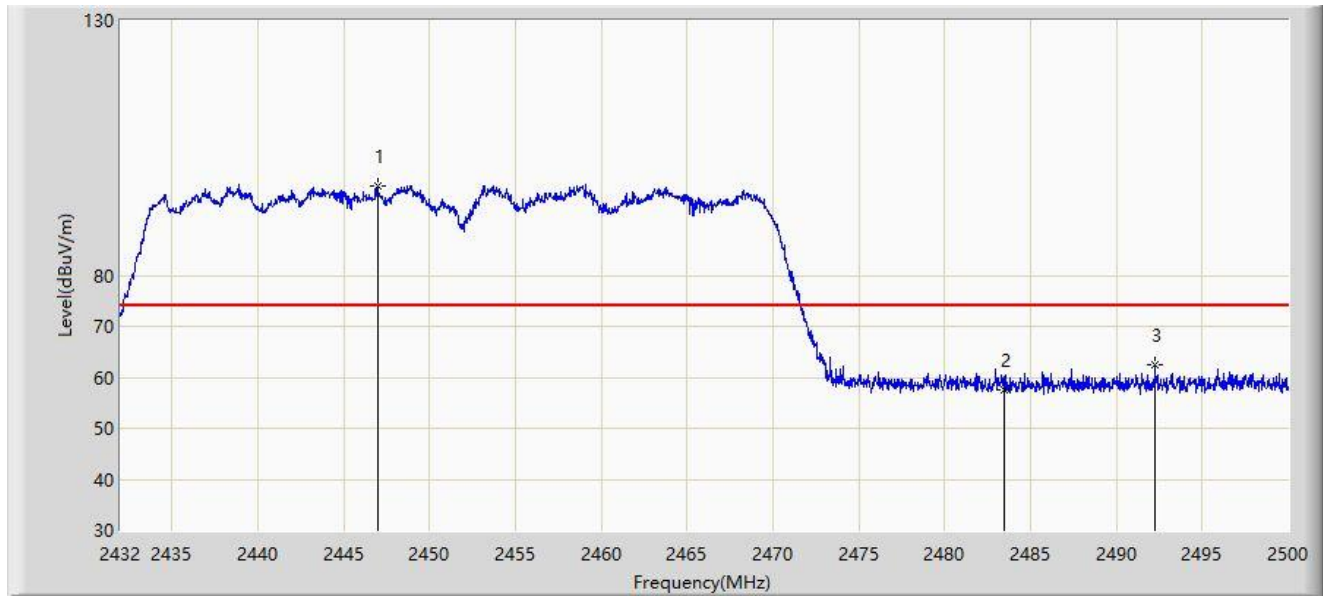


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2446.960	97.668	65.289	N/A	N/A	32.379	PK
2		2483.500	57.610	25.228	-16.390	74.000	32.382	PK
3	*	2492.248	62.590	30.210	-11.410	74.000	32.380	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

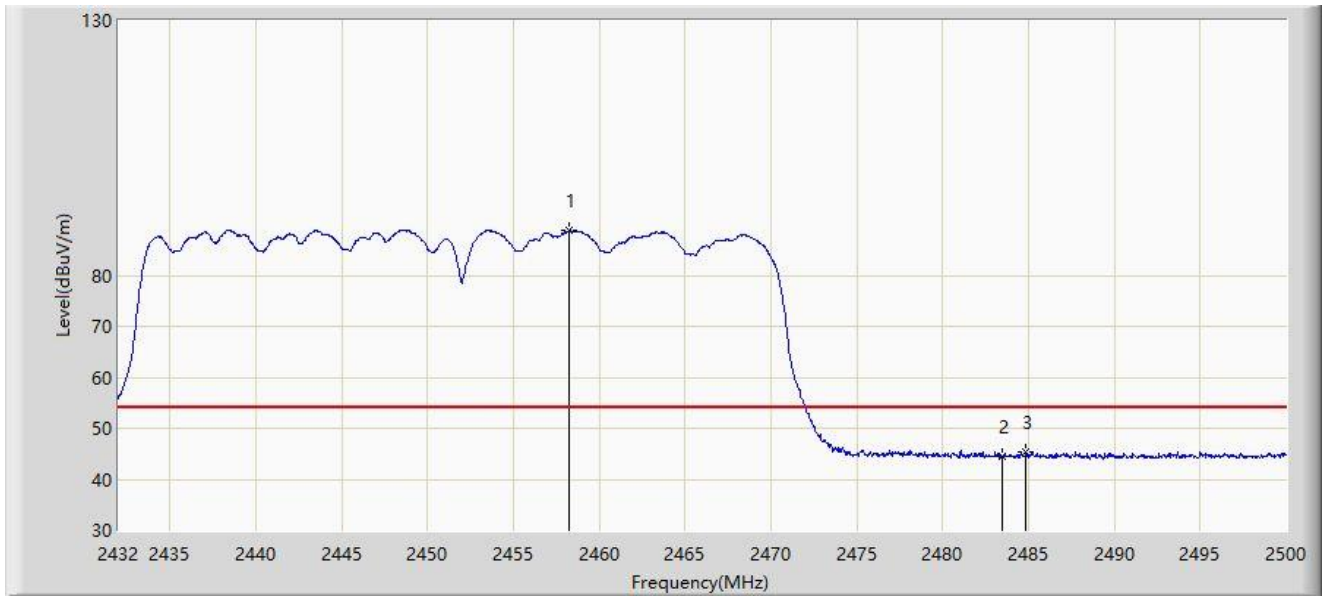


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2458.282	88.854	56.494	N/A	N/A	32.360	AV
2		2483.500	44.372	11.990	-9.628	54.000	32.382	AV
3	*	2484.870	45.430	13.048	-8.570	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

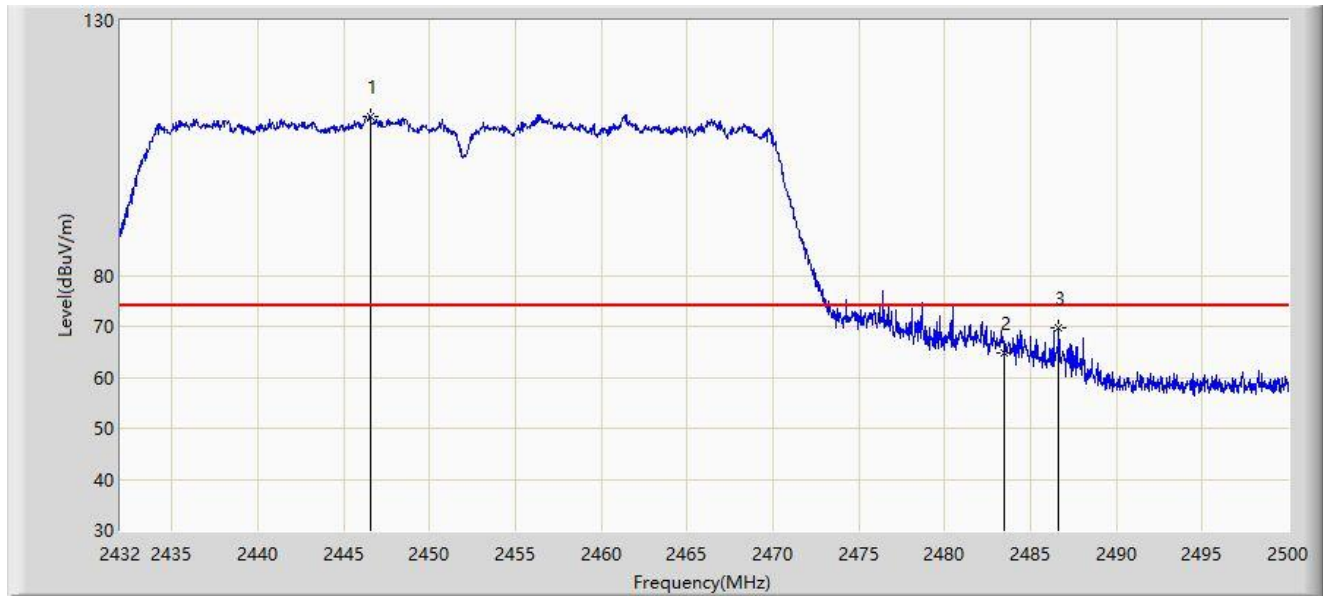


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2446.552	111.079	78.699	N/A	N/A	32.380	PK
2		2483.500	64.674	32.292	-9.326	74.000	32.382	PK
3	*	2486.638	69.608	37.227	-4.392	74.000	32.381	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

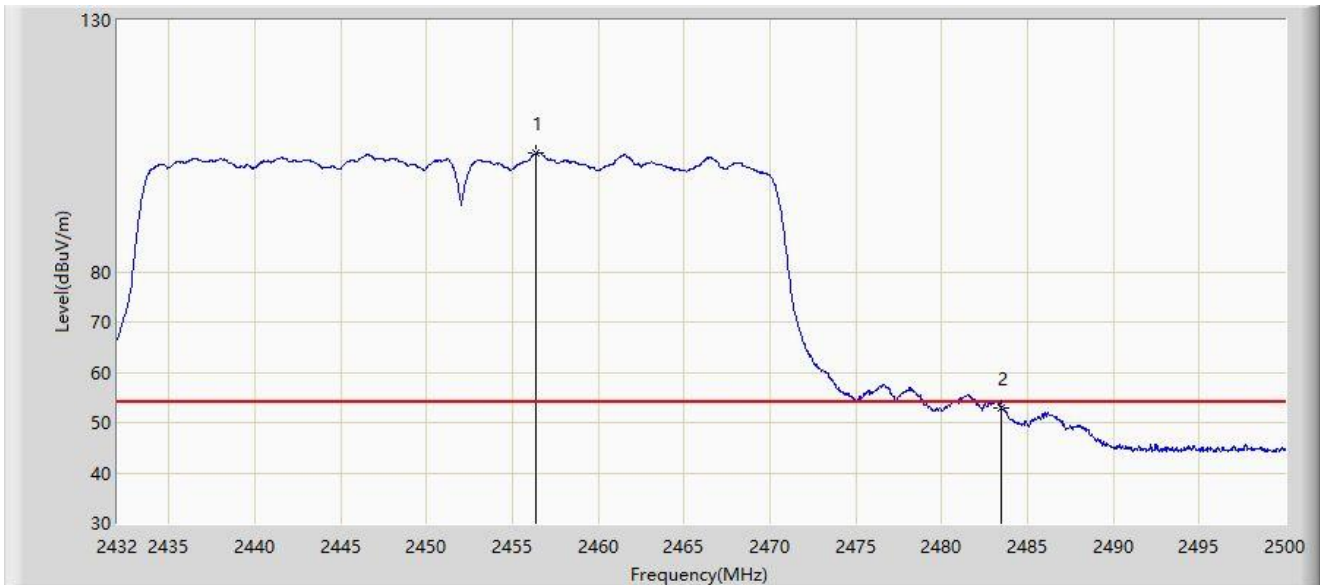


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2456.412	103.541	71.182	N/A	N/A	32.360	AV
2	*	2483.500	52.834	20.452	-1.166	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

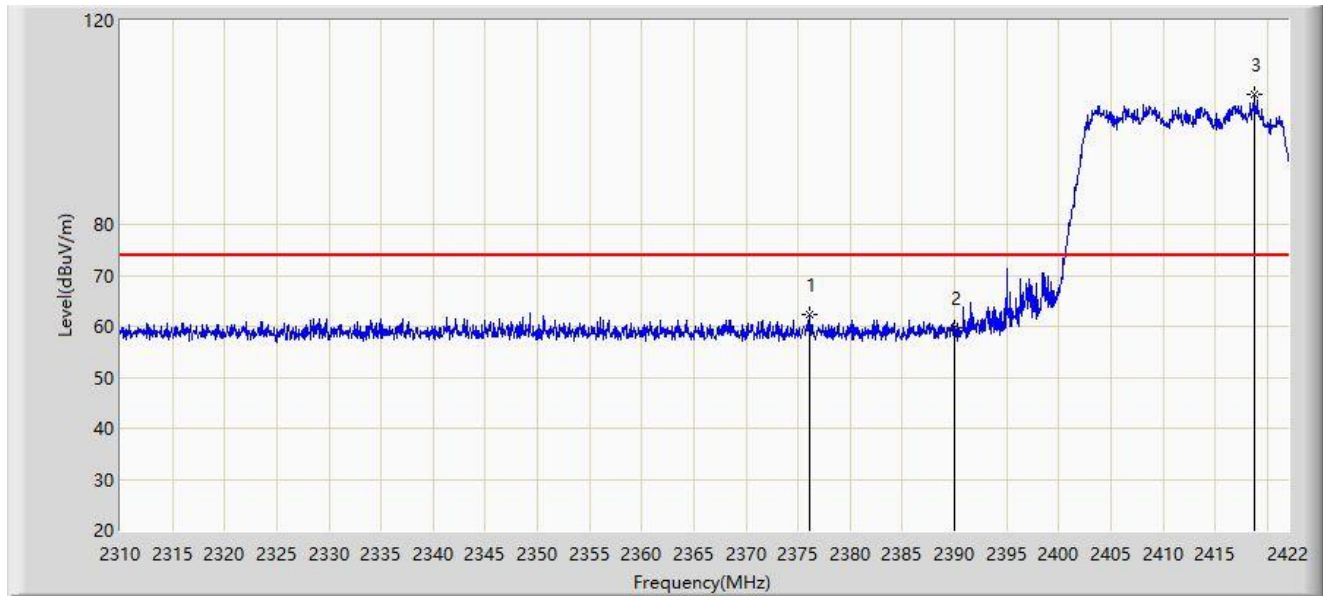


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2376.080	62.279	29.691	-11.721	74.000	32.588	PK
2		2390.000	59.593	27.067	-14.407	74.000	32.527	PK
3		2418.752	105.528	73.081	N/A	N/A	32.448	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

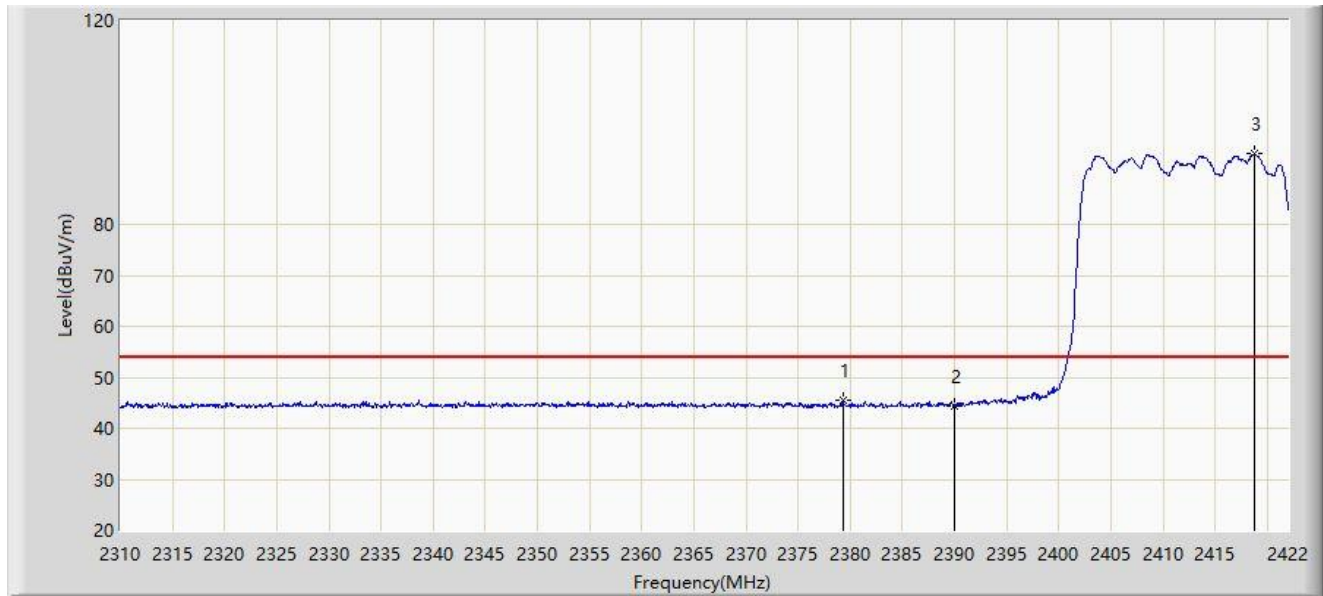


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2379.328	45.373	12.803	-8.627	54.000	32.570	AV
2		2390.000	44.478	11.952	-9.522	54.000	32.527	AV
3		2418.752	93.773	61.326	N/A	N/A	32.448	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

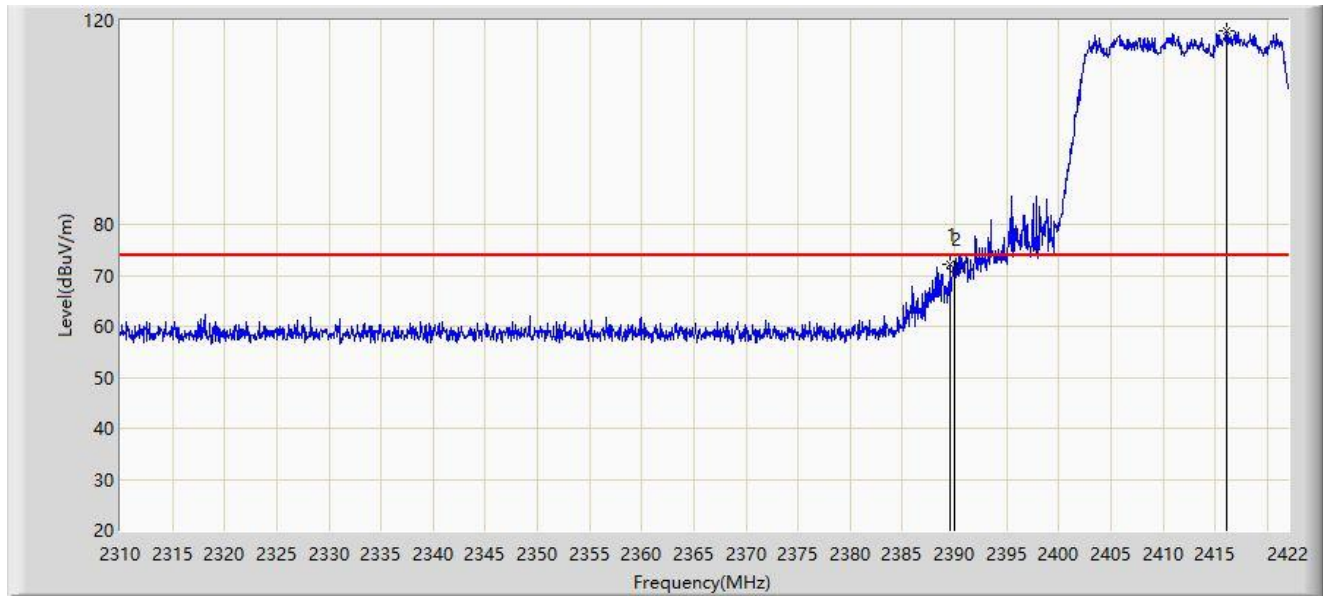


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.632	72.032	39.504	-1.968	74.000	32.528	PK
2		2390.000	71.260	38.734	-2.740	74.000	32.527	PK
3		2416.064	117.971	85.518	N/A	N/A	32.454	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2412MHz	

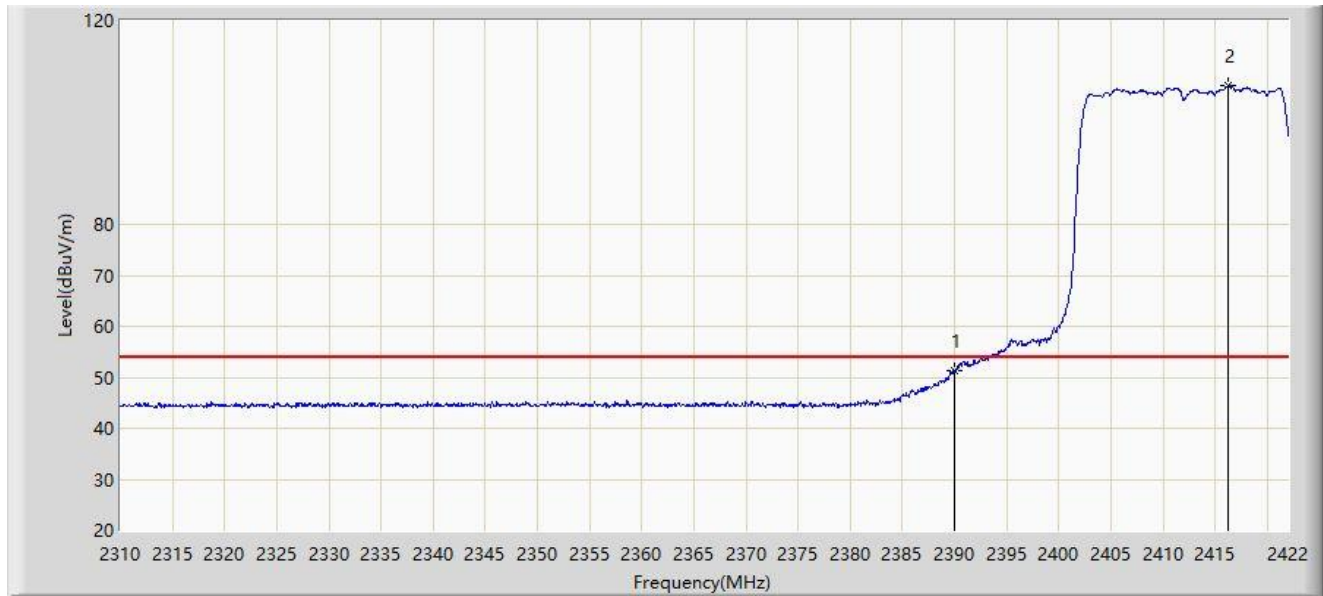


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	51.220	18.694	-2.780	54.000	32.527	AV
2		2416.232	107.249	74.796	N/A	N/A	32.453	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2417MHz	

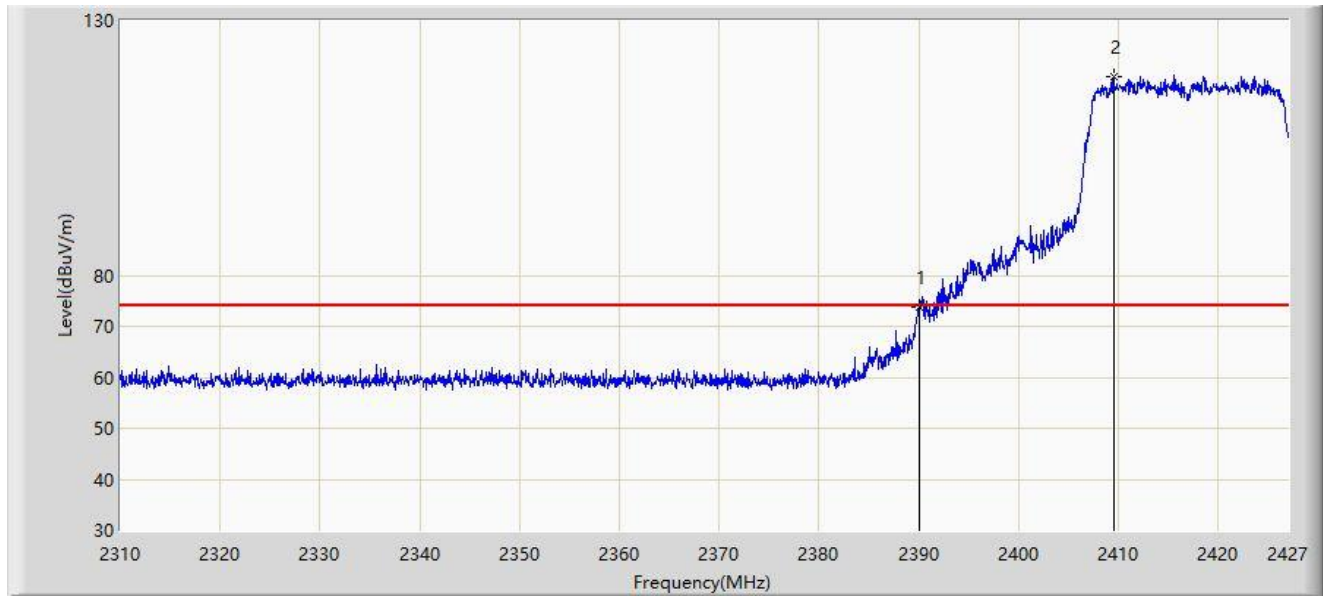


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	73.746	41.220	-0.254	74.000	32.527	PK
2		2409.567	119.108	86.639	N/A	N/A	32.469	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2417MHz	

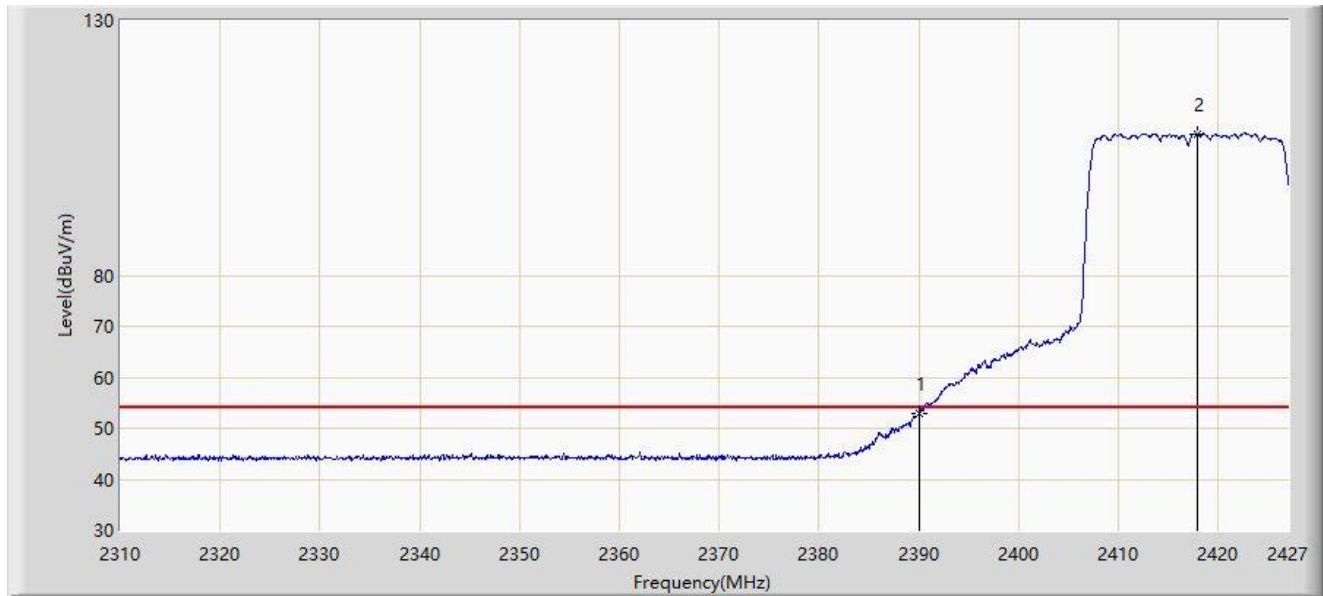


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	52.809	20.283	-1.191	54.000	32.527	AV
2		2417.933	107.823	75.374	N/A	N/A	32.449	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

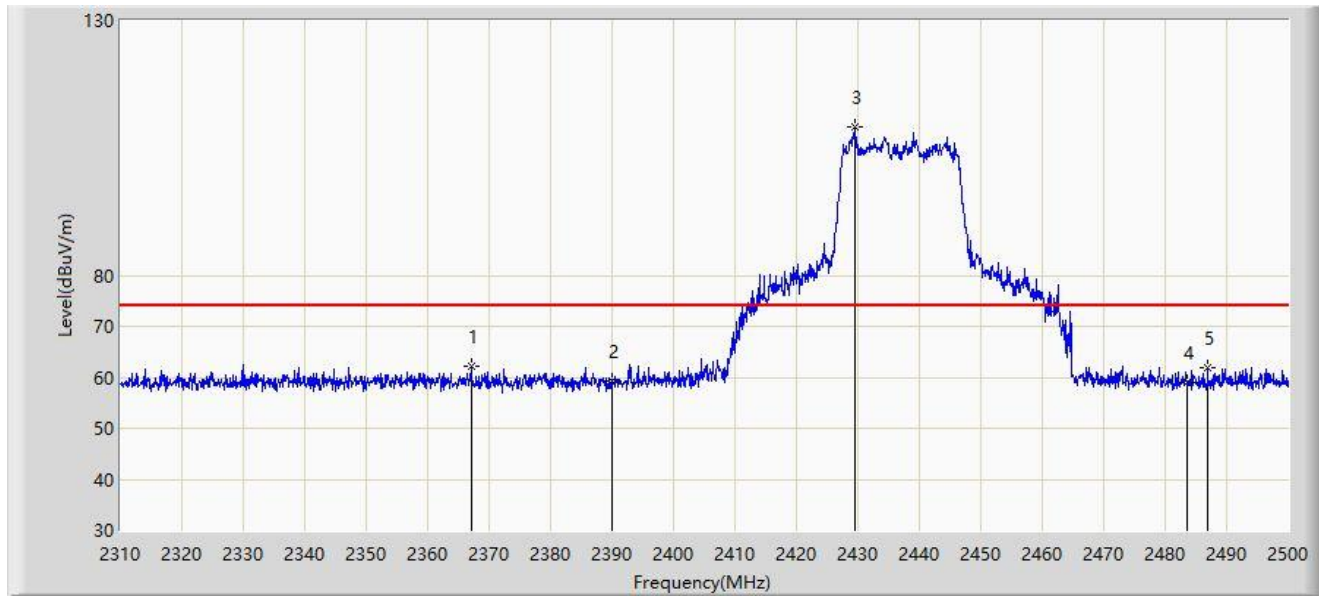


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2367.095	62.171	29.526	-11.829	74.000	32.644	PK
2		2390.000	59.296	26.770	-14.704	74.000	32.527	PK
3		2429.415	109.255	76.839	N/A	N/A	32.416	PK
4		2483.500	58.878	26.496	-15.122	74.000	32.382	PK
5		2486.890	61.928	29.547	-12.072	74.000	32.381	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

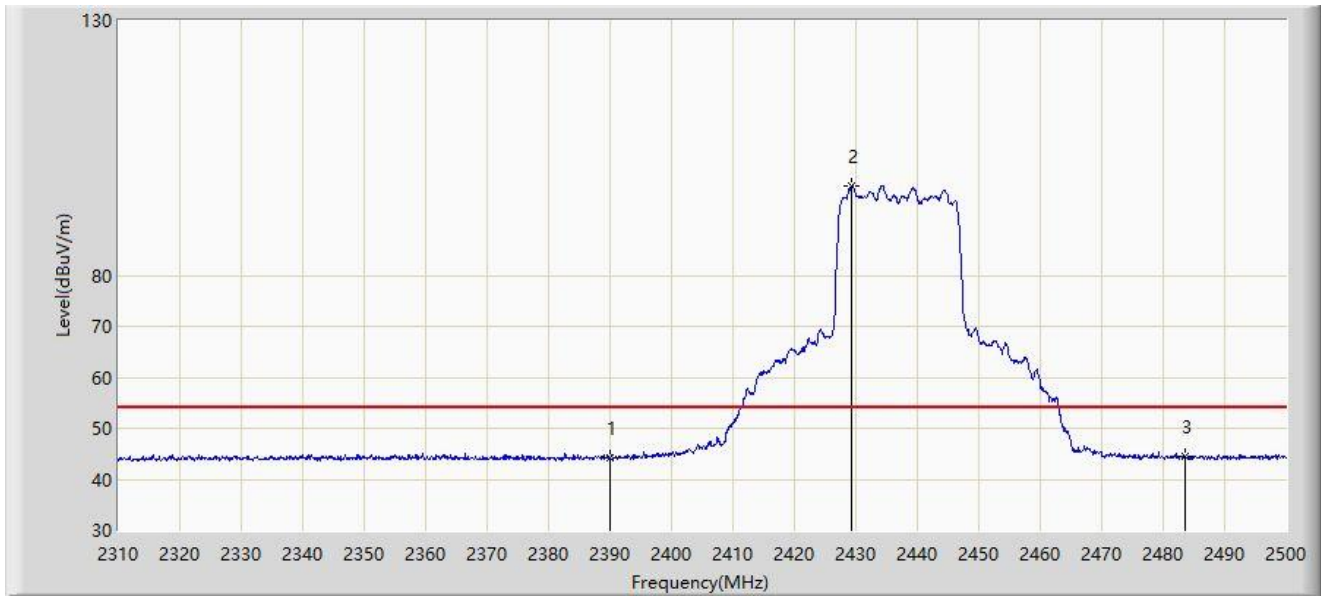


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2390.000	44.251	11.725	-9.749	54.000	32.527	AV
2		2429.225	97.580	65.164	N/A	N/A	32.416	AV
3	*	2483.500	44.524	12.142	-9.476	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

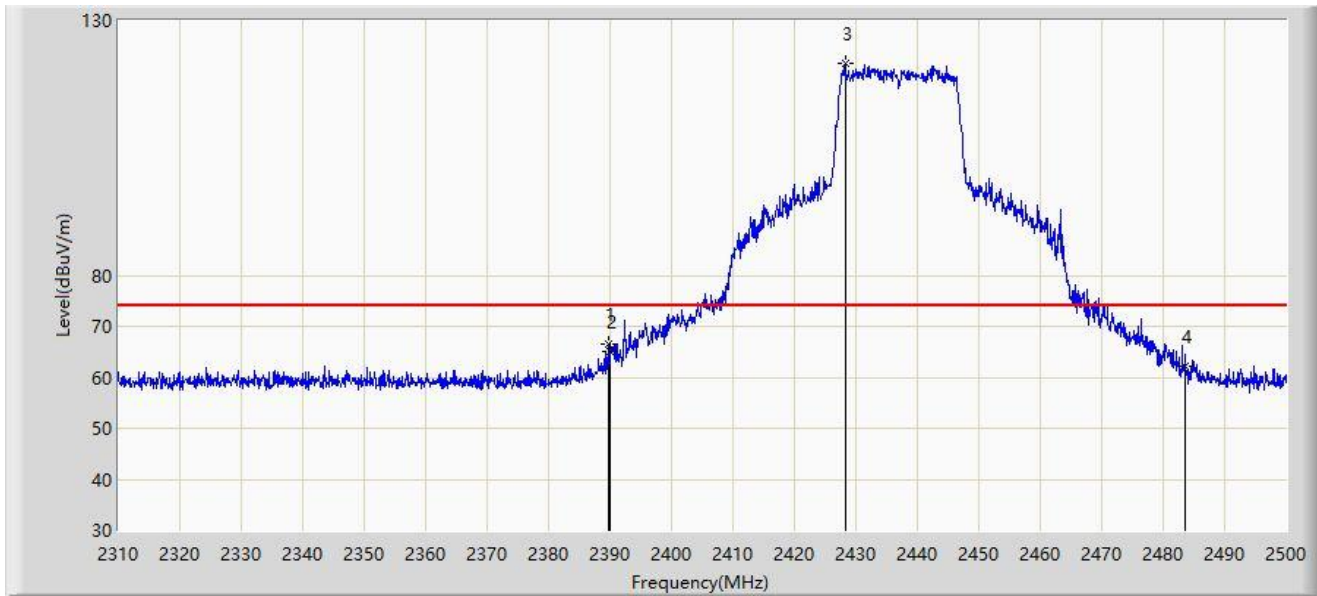


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.800	66.541	34.014	-7.459	74.000	32.527	PK
2		2390.000	65.185	32.659	-8.815	74.000	32.527	PK
3		2428.275	121.549	89.130	N/A	N/A	32.418	PK
4		2483.500	62.155	29.773	-11.845	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2437MHz	

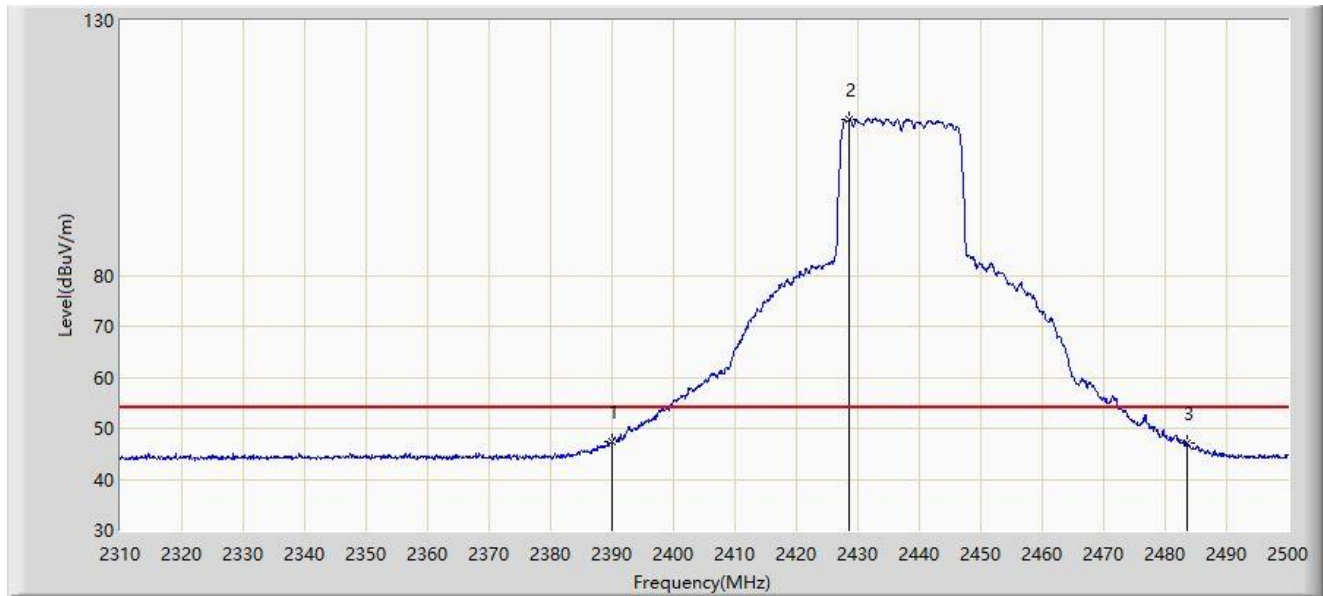


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	47.329	14.803	-6.671	54.000	32.527	AV
2		2428.560	110.619	78.201	N/A	N/A	32.418	AV
3		2483.500	47.087	14.705	-6.913	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2452MHz	

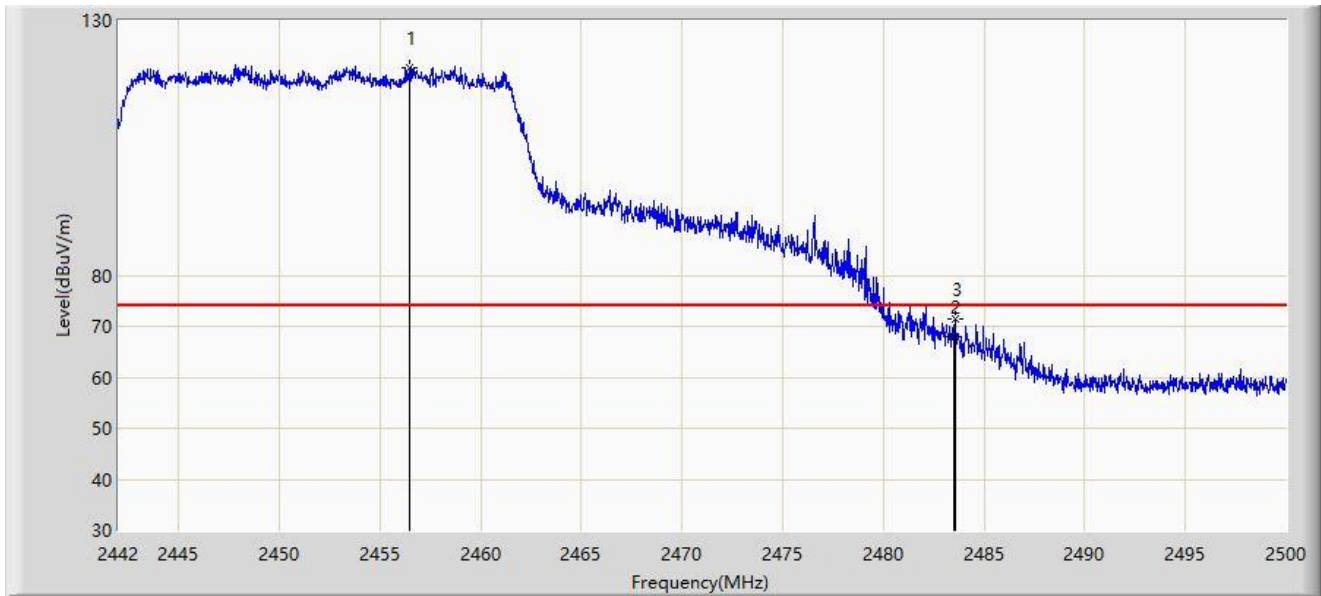


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2456.471	120.627	88.268	N/A	N/A	32.360	PK
2		2483.500	67.857	35.475	-6.143	74.000	32.382	PK
3	*	2483.557	71.421	39.039	-2.579	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2452MHz	

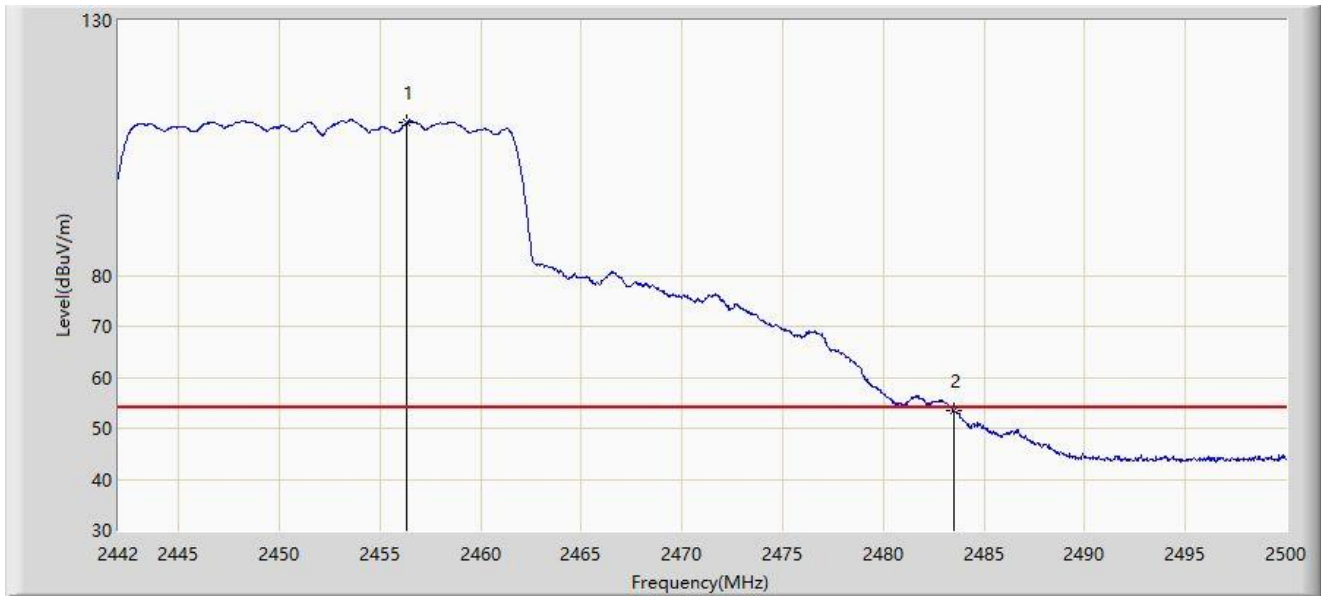


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2456.326	110.017	77.658	N/A	N/A	32.359	AV
2	*	2483.500	53.345	20.963	-0.655	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2457MHz	

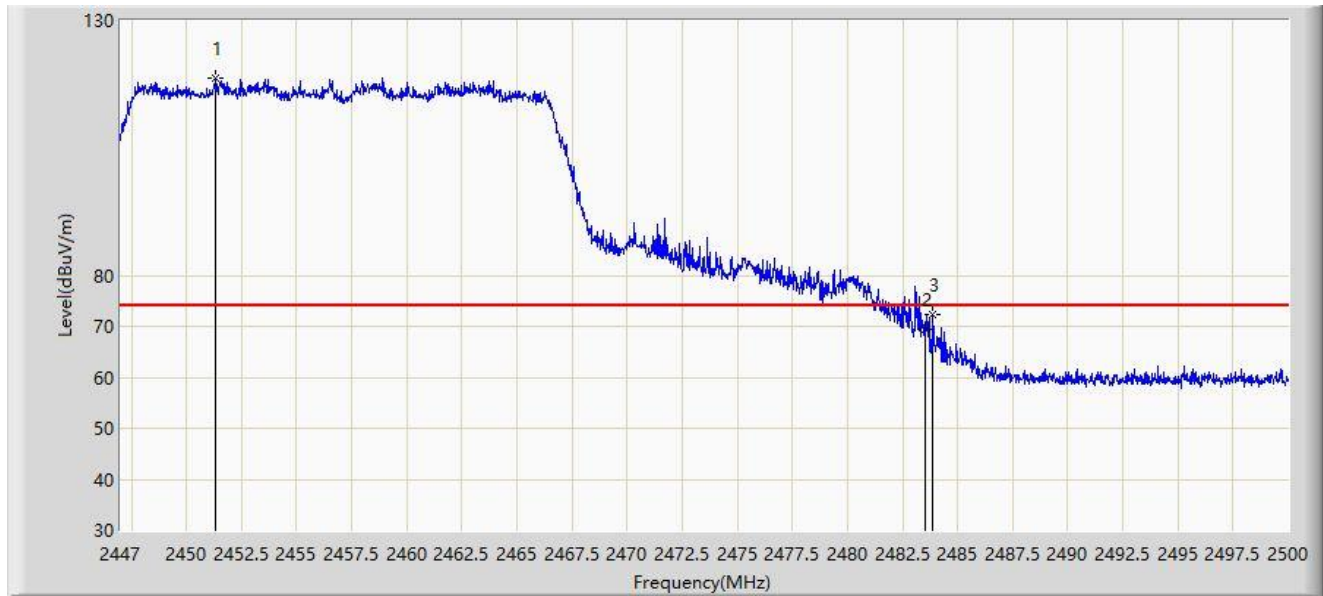

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2451.346	118.573	86.204	N/A	N/A	32.369	PK
2		2483.500	69.283	36.901	-4.717	74.000	32.382	PK
3	*	2483.862	72.308	39.926	-1.692	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2457MHz	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2461.549	107.511	75.149	N/A	N/A	32.362	AV
2	*	2483.500	51.228	18.846	-2.772	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

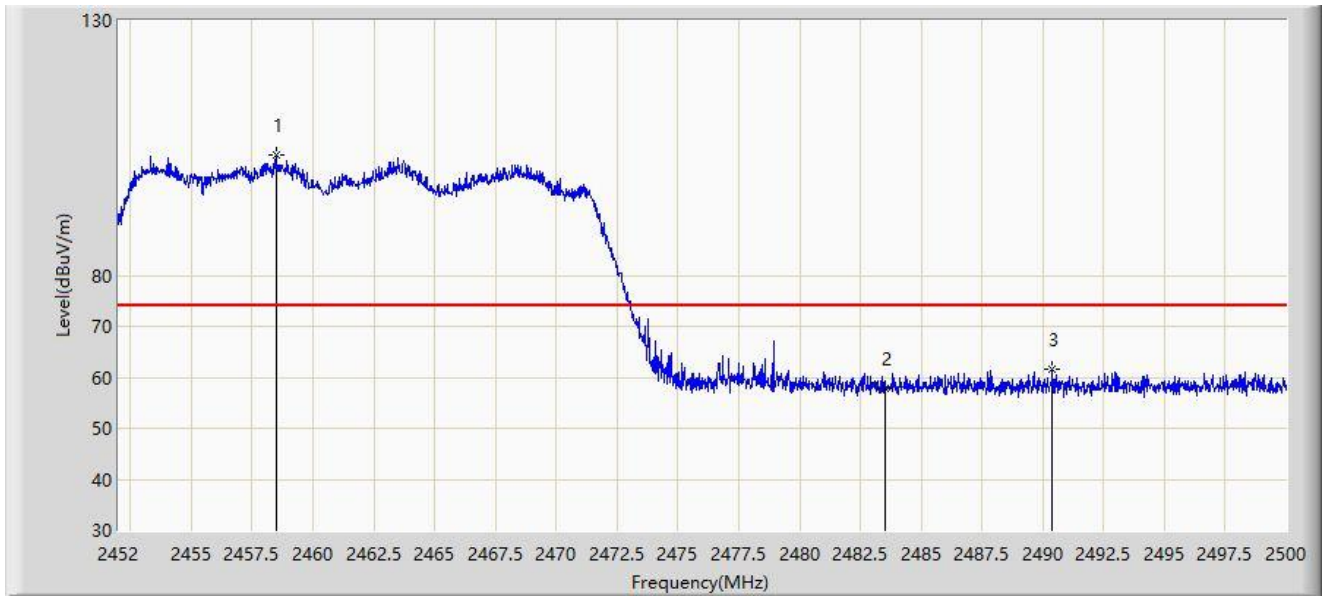


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2458.480	103.718	71.357	N/A	N/A	32.361	PK
2		2483.500	57.802	25.420	-16.198	74.000	32.382	PK
3	*	2490.400	61.615	29.236	-12.385	74.000	32.380	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

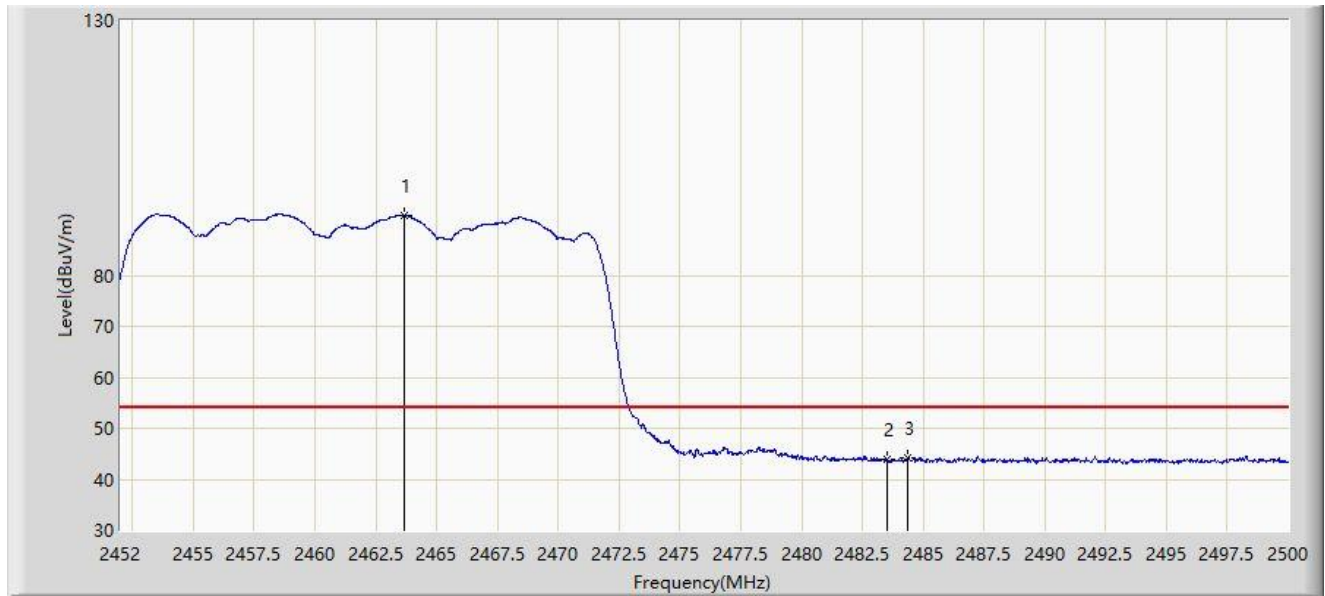


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2463.688	91.738	59.372	N/A	N/A	32.366	AV
2		2483.500	43.893	11.511	-10.107	54.000	32.382	AV
3	*	2484.352	44.240	11.858	-9.760	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	

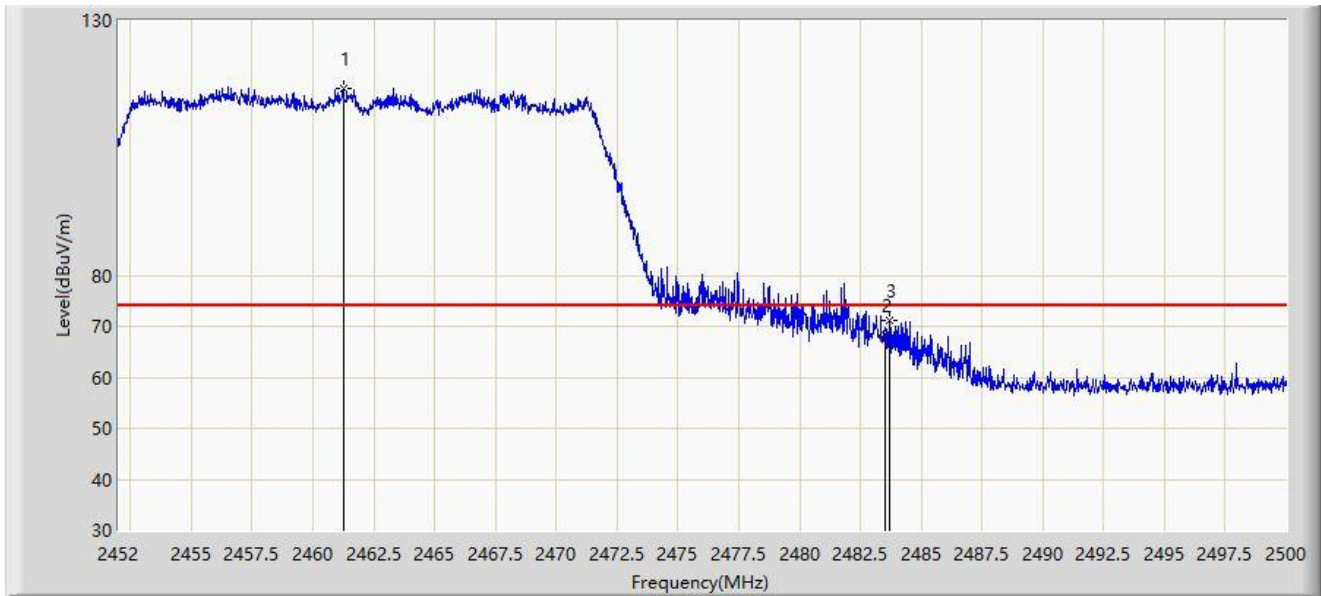

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.240	116.540	84.178	N/A	N/A	32.362	PK
2		2483.500	68.208	35.826	-5.792	74.000	32.382	PK
3	*	2483.704	71.052	38.670	-2.948	74.000	32.382	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2456.680	106.562	74.202	N/A	N/A	32.359	AV
2	*	2483.500	52.879	20.497	-1.121	54.000	32.382	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

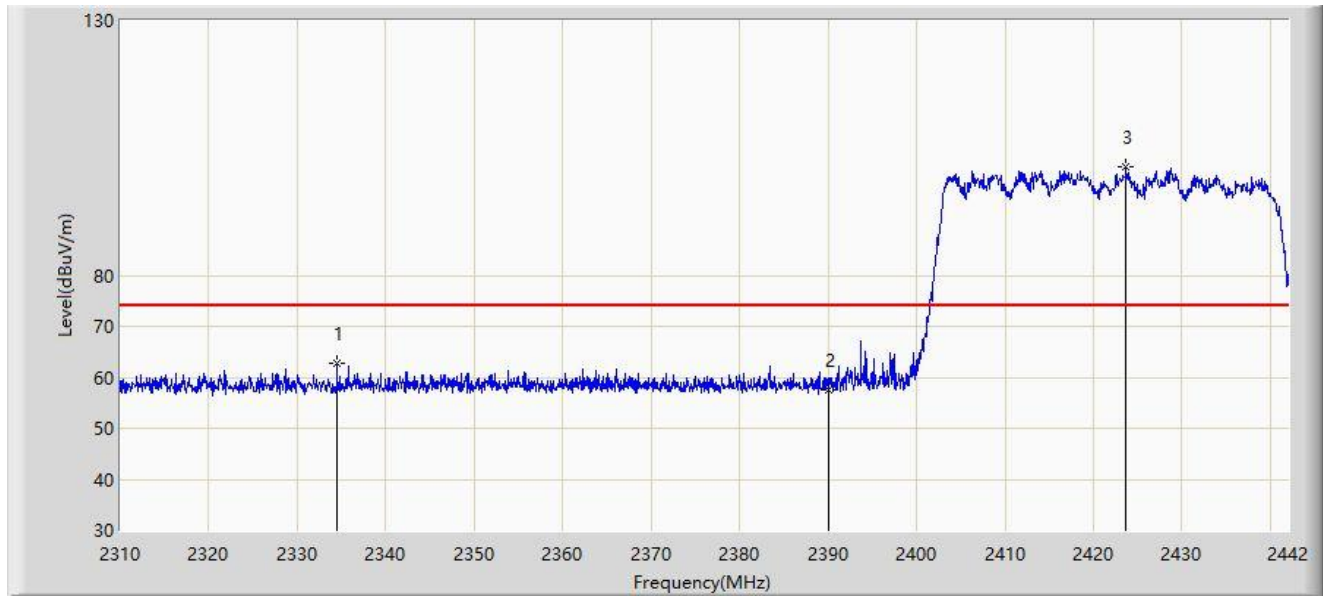


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2334.486	62.775	30.005	-11.225	74.000	32.770	PK
2		2390.000	57.649	25.123	-16.351	74.000	32.527	PK
3		2423.718	101.212	68.779	N/A	N/A	32.433	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

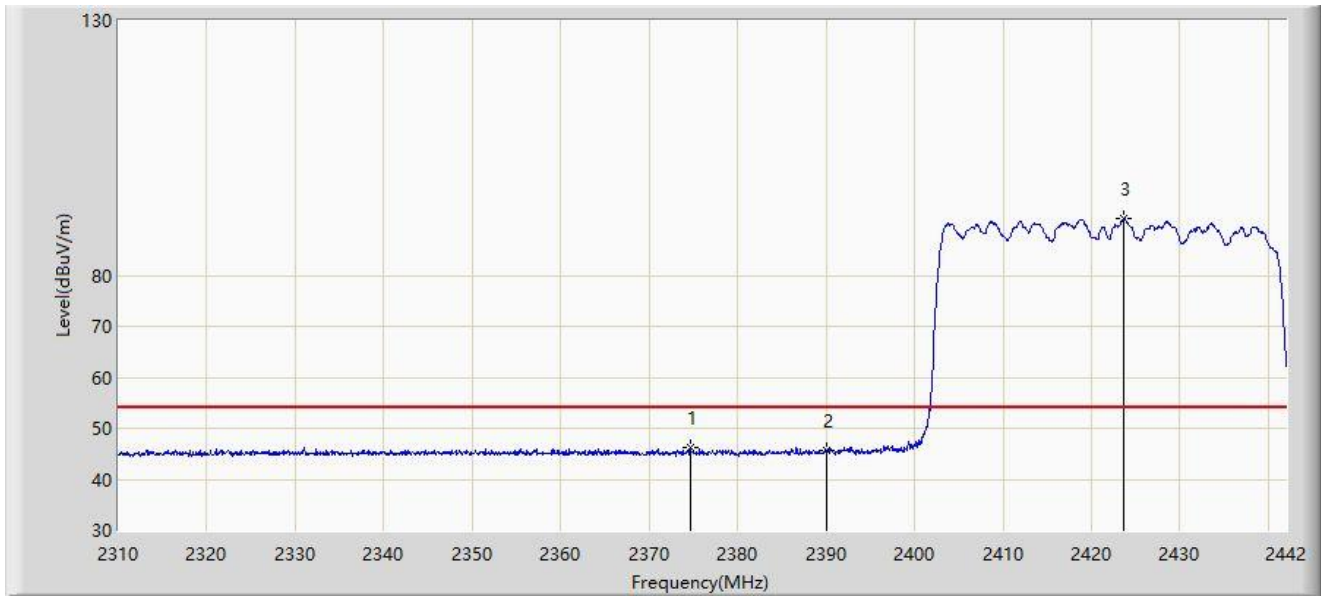


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2374.680	46.095	13.498	-7.905	54.000	32.597	AV
2		2390.000	45.525	12.999	-8.475	54.000	32.527	AV
3		2423.718	91.098	58.665	N/A	N/A	32.433	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-05-10
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2422MHz	

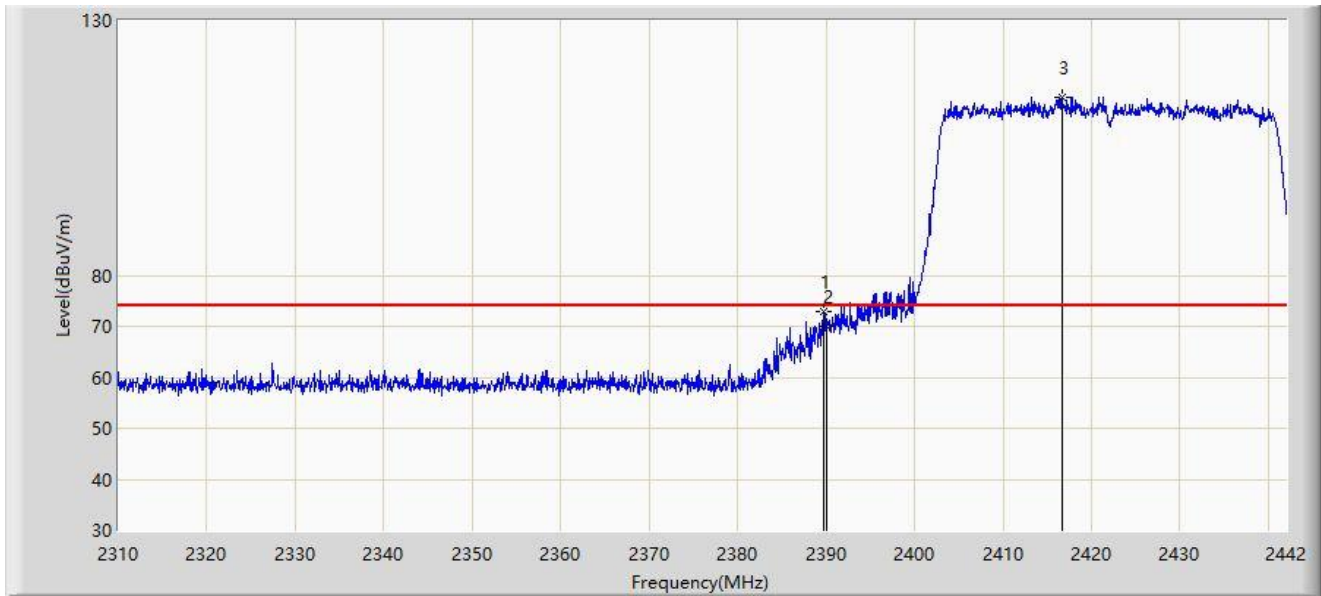

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.794	72.931	40.404	-1.069	74.000	32.527	PK
2		2390.000	70.065	37.539	-3.935	74.000	32.527	PK
3		2416.656	114.991	82.539	N/A	N/A	32.452	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).