


Site: SIP-AC2	Test Date: 2024-06-04
Limit: FCC_5.8G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

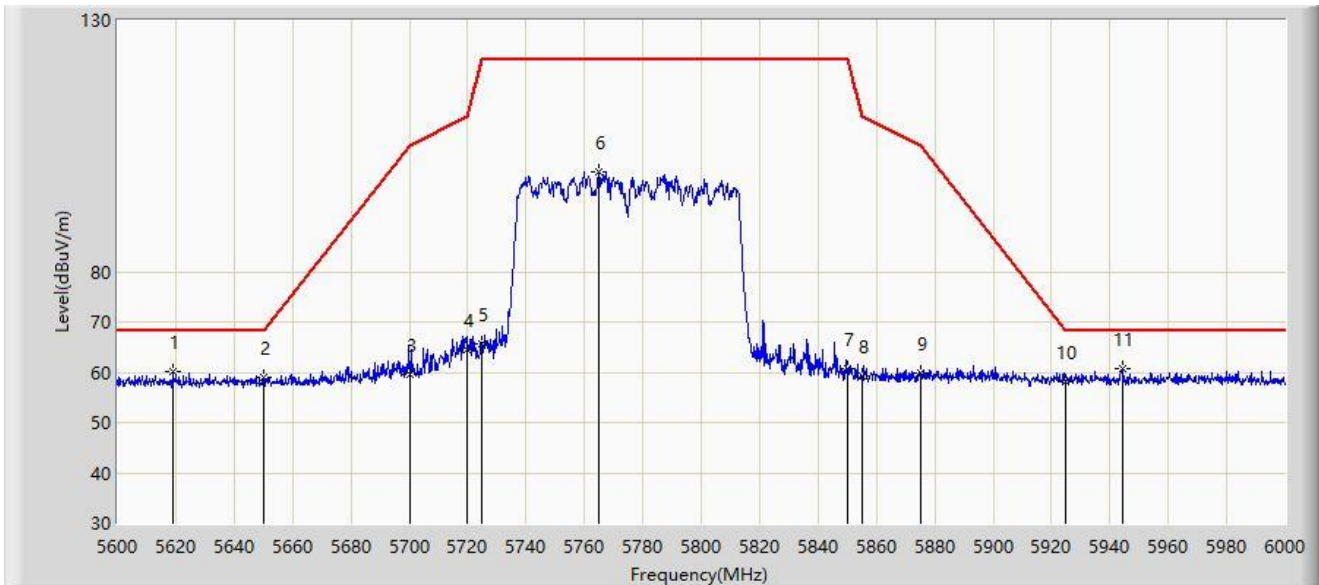


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5618.800	60.093	66.126	-8.107	68.200	-6.033	PK
2		5650.000	58.871	64.858	-9.329	68.200	-5.988	PK
3		5700.000	59.543	65.148	-45.657	105.200	-5.605	PK
4		5720.000	64.378	69.926	-46.422	110.800	-5.549	PK
5		5725.000	65.583	71.055	-56.617	122.200	-5.473	PK
6		5764.800	99.880	105.779	N/A	N/A	-5.899	PK
7		5850.000	60.684	66.036	-61.516	122.200	-5.352	PK
8		5855.000	59.151	64.533	-51.649	110.800	-5.382	PK
9		5875.000	59.825	64.851	-45.375	105.200	-5.026	PK
10		5925.000	58.235	63.778	-9.965	68.200	-5.543	PK
11	*	5944.600	60.632	66.079	-7.568	68.200	-5.448	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

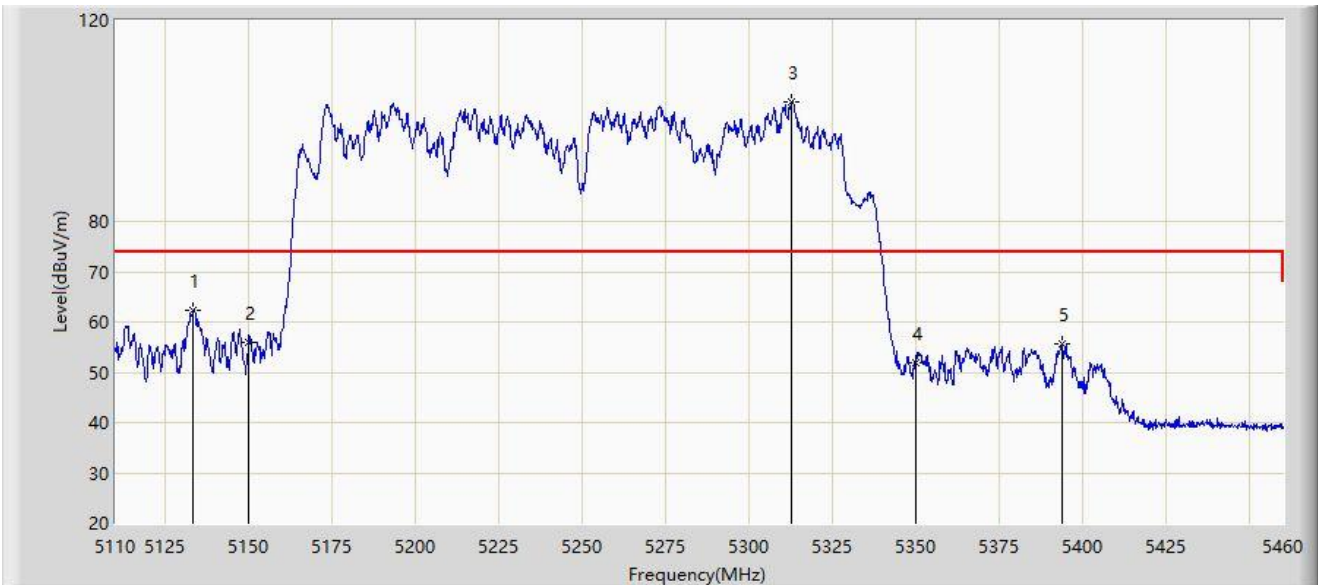


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5133.275	62.263	66.129	-11.737	74.000	-3.865	PK
2		5150.000	56.072	57.796	-17.928	74.000	-1.724	PK
3		5312.825	103.792	56.577	N/A	N/A	47.215	PK
4		5350.000	51.915	52.788	-22.085	74.000	-0.873	PK
5		5393.675	55.605	59.865	-18.395	74.000	-4.260	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

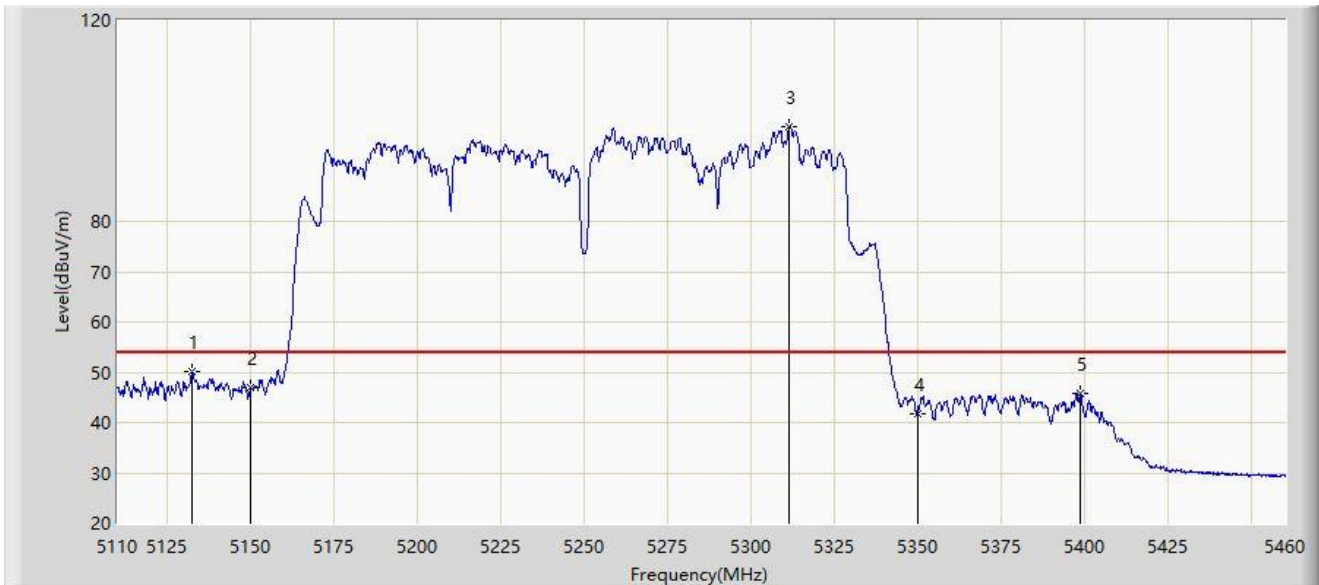


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5132.400	50.093	53.980	-3.907	54.000	-3.887	AV
2		5150.000	46.911	48.635	-7.089	54.000	-1.724	AV
3		5311.425	98.797	53.983	N/A	N/A	44.814	AV
4		5350.000	41.686	42.559	-12.314	54.000	-0.873	AV
5		5398.575	45.797	49.984	-8.203	54.000	-4.187	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

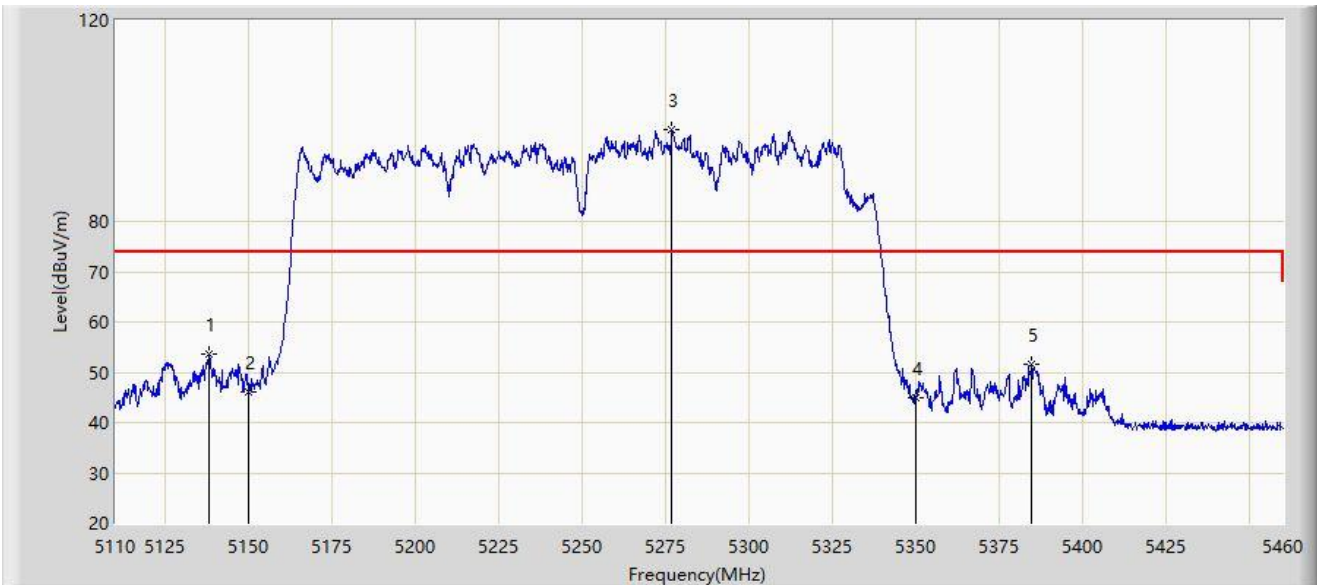


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5138.000	53.516	56.826	-20.484	74.000	-3.310	PK
2		5150.000	46.192	47.916	-27.808	74.000	-1.724	PK
3		5276.775	98.135	55.826	N/A	N/A	42.308	PK
4		5350.000	45.061	45.934	-28.939	74.000	-0.873	PK
5		5384.750	51.688	56.000	-22.312	74.000	-4.313	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5250MHz	

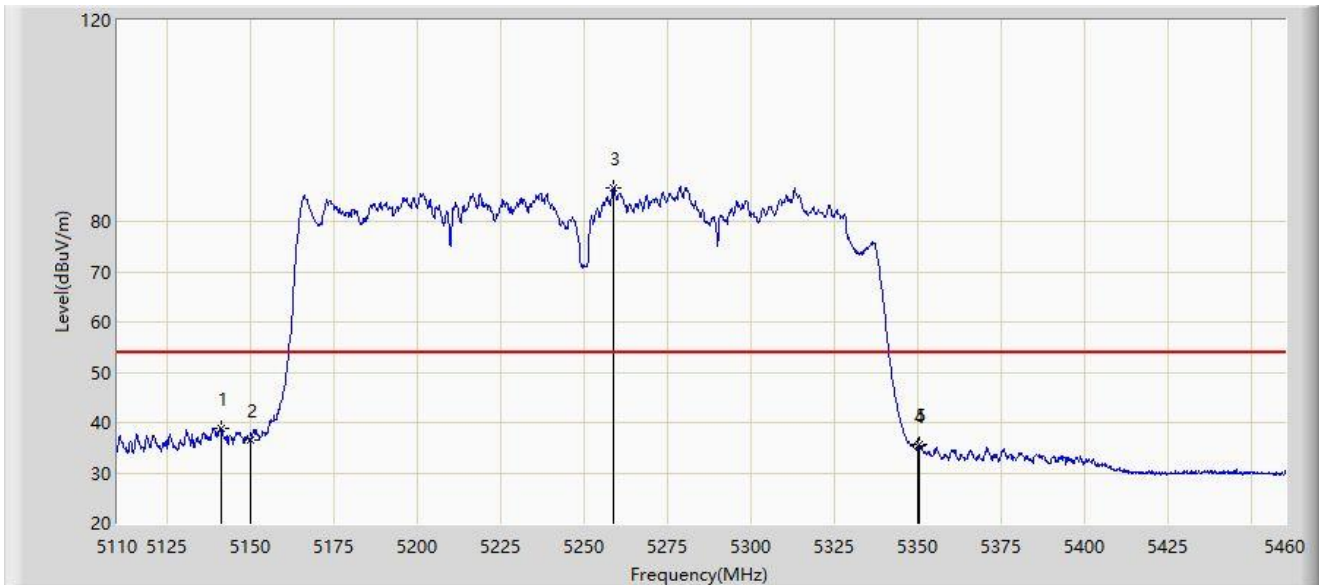


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5140.975	38.939	41.858	-15.061	54.000	-2.920	AV
2		5150.000	36.517	38.241	-17.483	54.000	-1.724	AV
3		5258.750	86.770	42.184	N/A	N/A	44.587	AV
4		5350.000	35.274	36.147	-18.726	54.000	-0.873	AV
5		5350.450	35.731	36.847	-18.269	54.000	-1.116	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

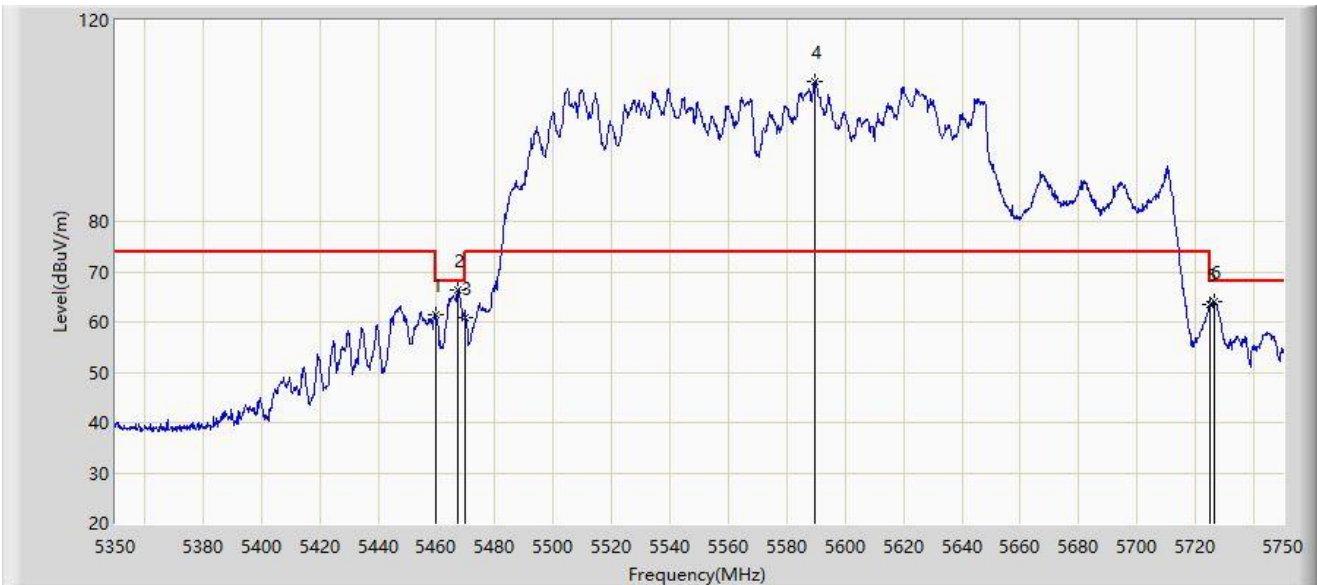


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	61.536	63.837	-6.664	68.200	-2.301	PK
2	*	5467.400	66.491	67.716	-1.709	68.200	-1.225	PK
3		5470.000	60.887	61.477	-7.313	68.200	-0.591	PK
4		5589.400	107.741	62.068	N/A	N/A	45.674	PK
5		5725.000	63.364	62.136	-4.836	68.200	1.227	PK
6		5726.600	64.041	63.611	-4.159	68.200	0.430	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

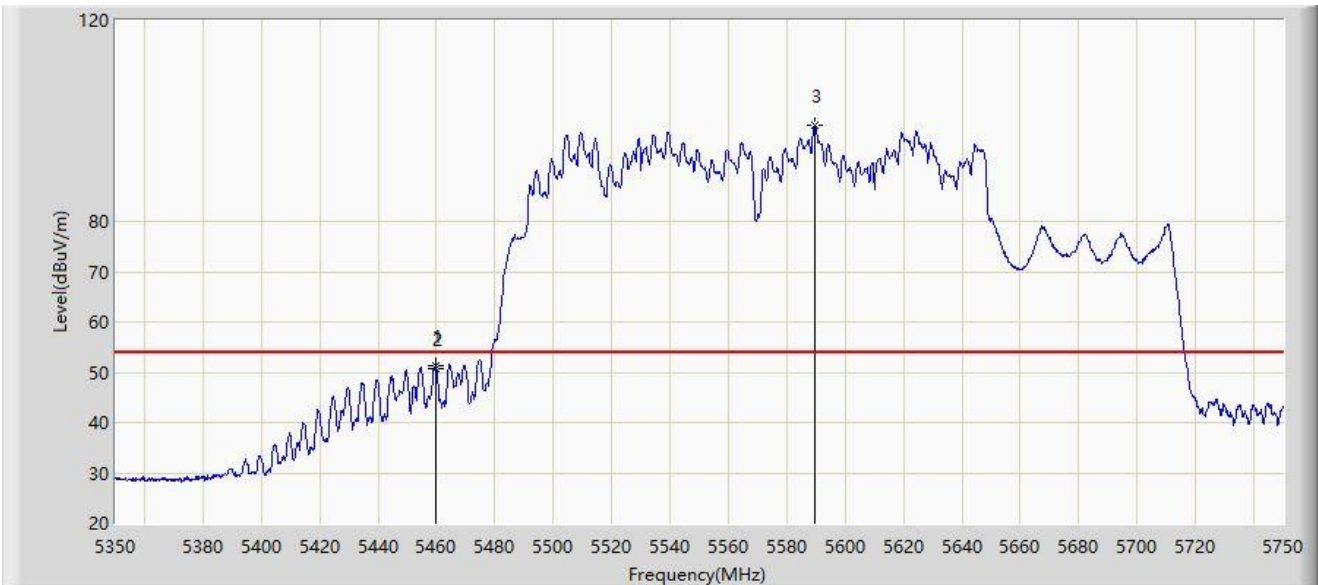


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.800	51.283	53.602	-2.717	54.000	-2.318	AV
2		5460.000	50.608	52.909	-3.392	54.000	-2.301	AV
3		5589.600	99.217	53.174	N/A	N/A	46.043	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

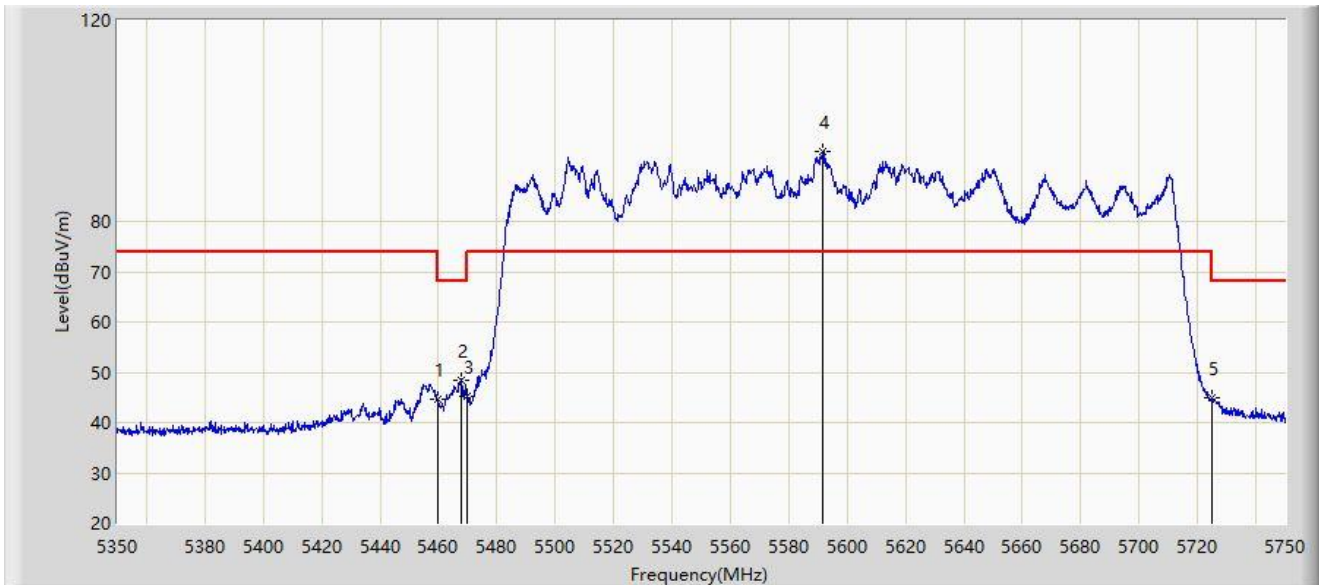


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	44.680	46.981	-23.520	68.200	-2.301	PK
2	*	5467.600	48.475	49.640	-19.725	68.200	-1.165	PK
3		5470.000	45.201	45.791	-22.999	68.200	-0.591	PK
4		5591.800	93.954	45.461	N/A	N/A	48.494	PK
5		5725.000	44.934	43.706	-23.266	68.200	1.227	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT160 at 5570MHz	

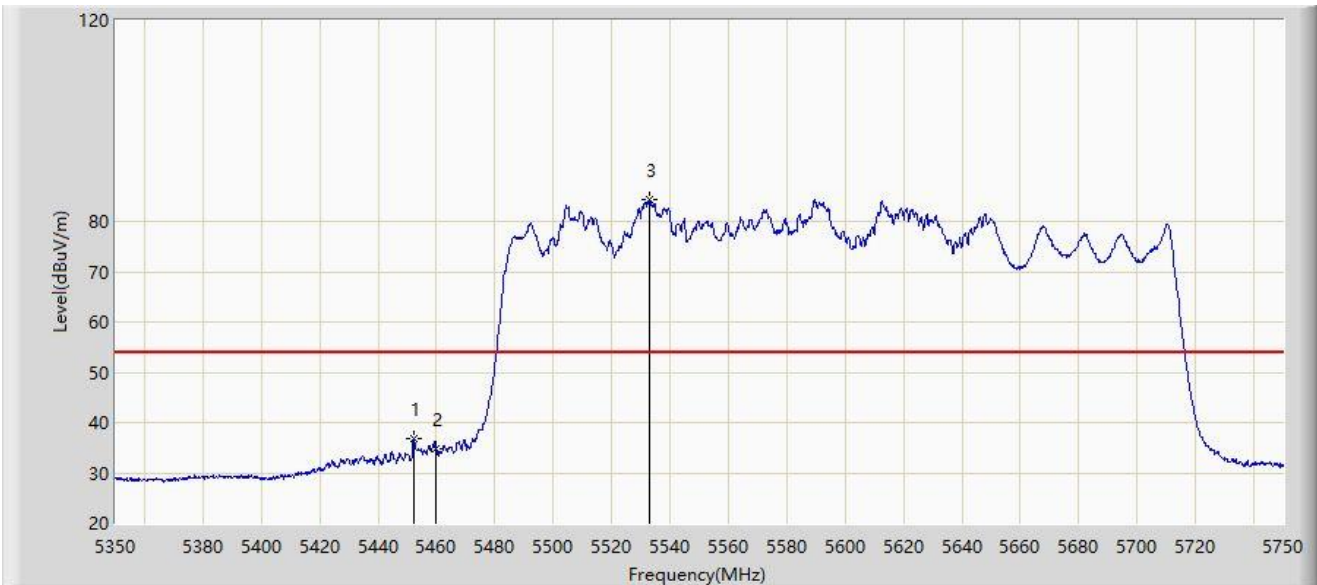


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5452.200	36.832	39.560	-17.168	54.000	-2.728	AV
2		5460.000	34.830	37.131	-19.170	54.000	-2.301	AV
3		5532.800	84.457	37.471	N/A	N/A	46.986	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

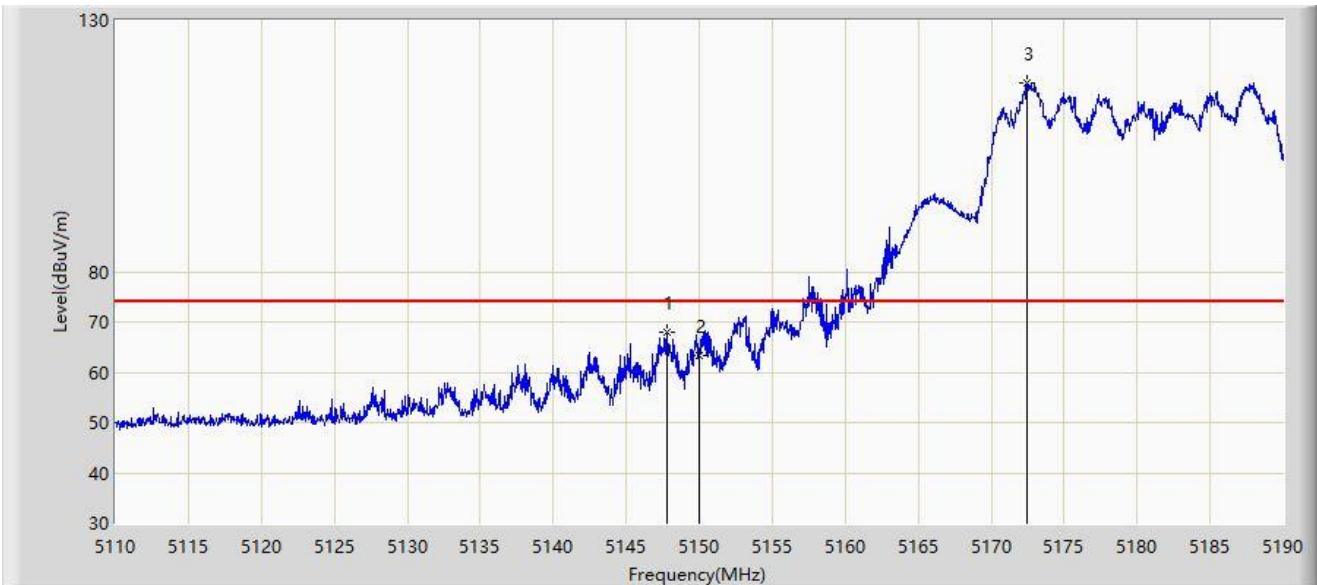


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5147.760	68.037	70.142	-5.963	74.000	-2.105	PK
2		5150.000	63.361	65.085	-10.639	74.000	-1.724	PK
3		5172.480	117.500	70.683	N/A	N/A	46.817	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

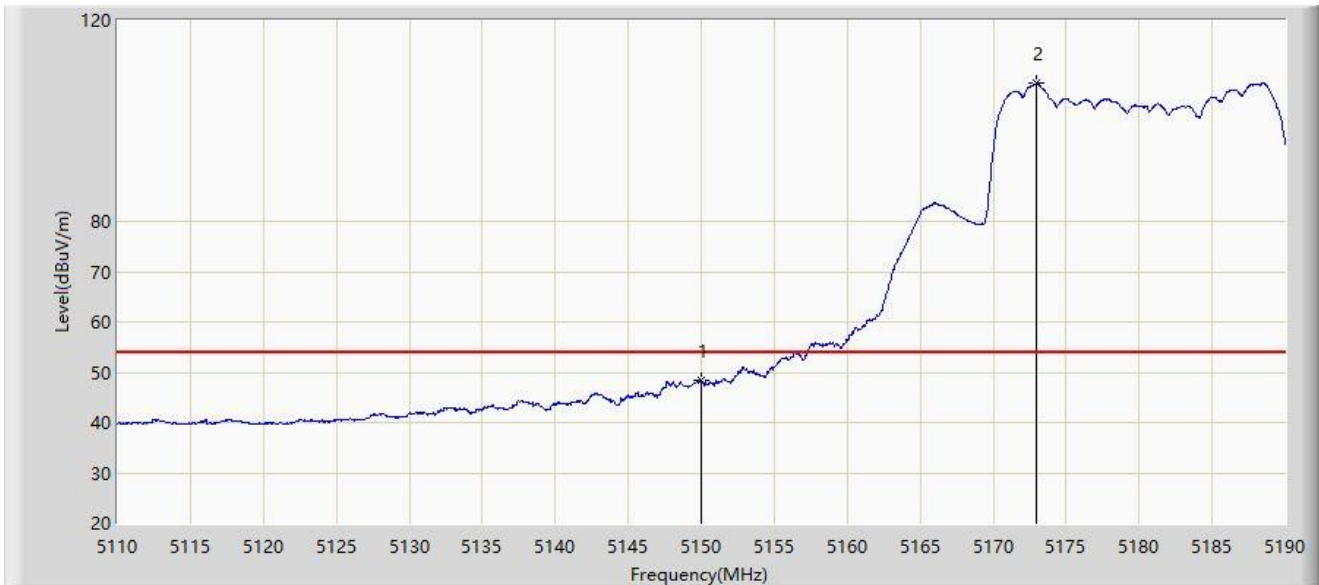


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5150.000	48.475	50.199	-5.525	54.000	-1.724	AV
2		5173.000	107.438	60.064	N/A	N/A	47.373	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

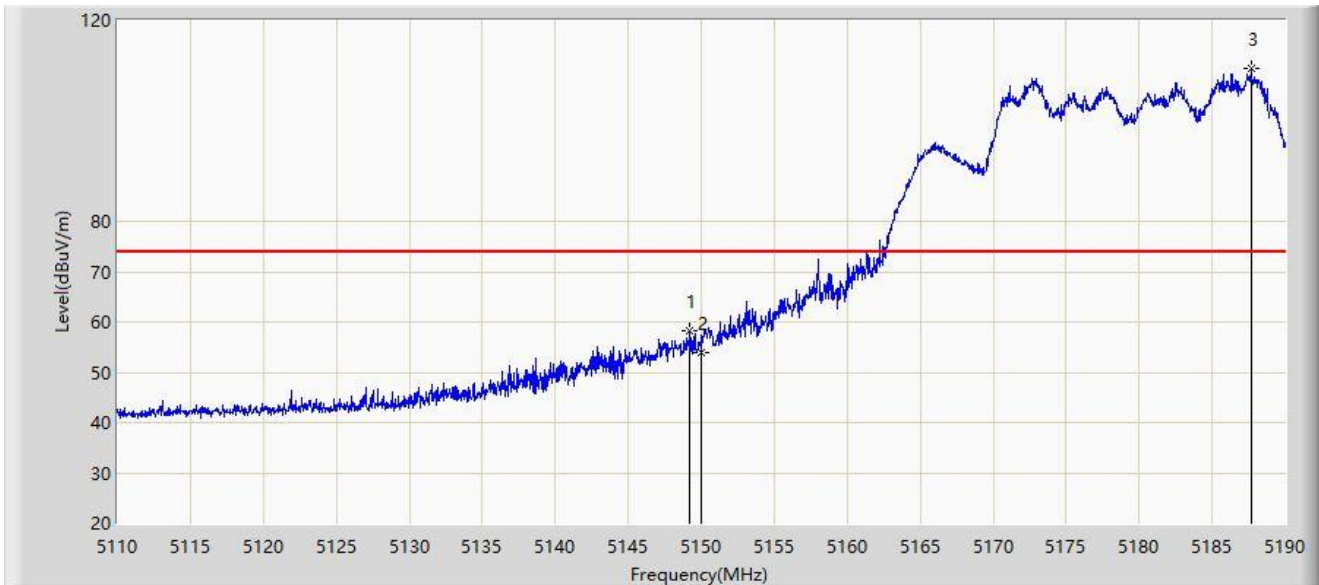


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.240	58.227	60.091	-15.773	74.000	-1.864	PK
2		5150.000	53.930	55.654	-20.070	74.000	-1.724	PK
3		5187.680	110.380	72.386	N/A	N/A	37.994	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5180MHz	

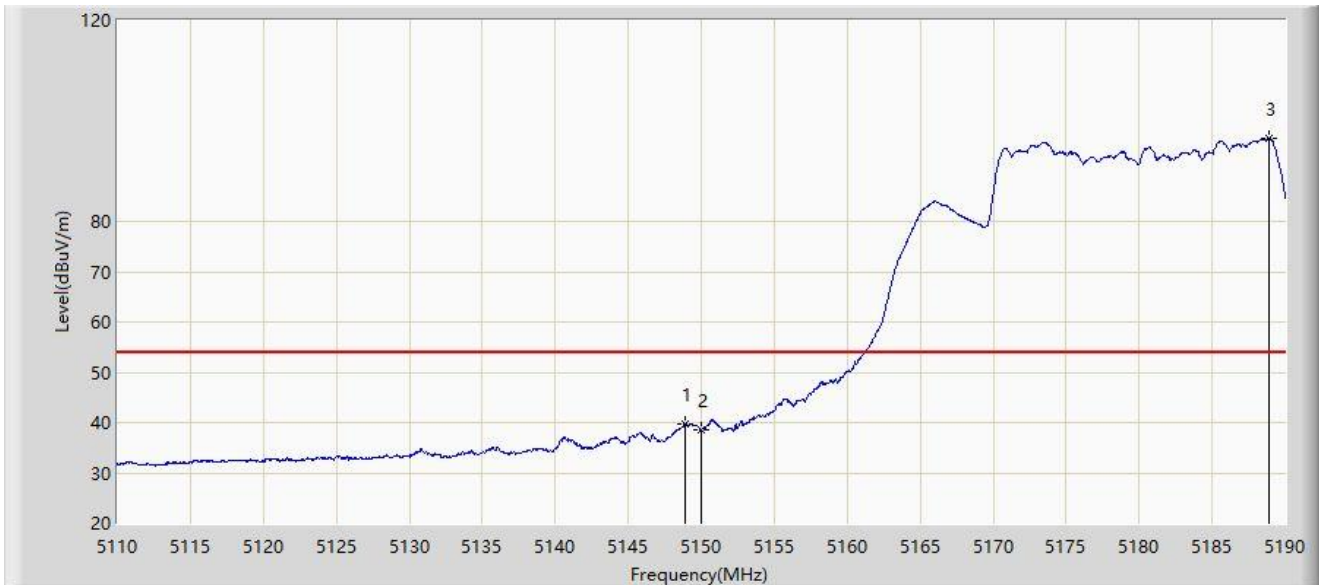


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5148.880	39.853	41.788	-14.147	54.000	-1.934	AV
2		5150.000	38.695	40.419	-15.305	54.000	-1.724	AV
3		5188.880	96.567	56.767	N/A	N/A	39.800	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

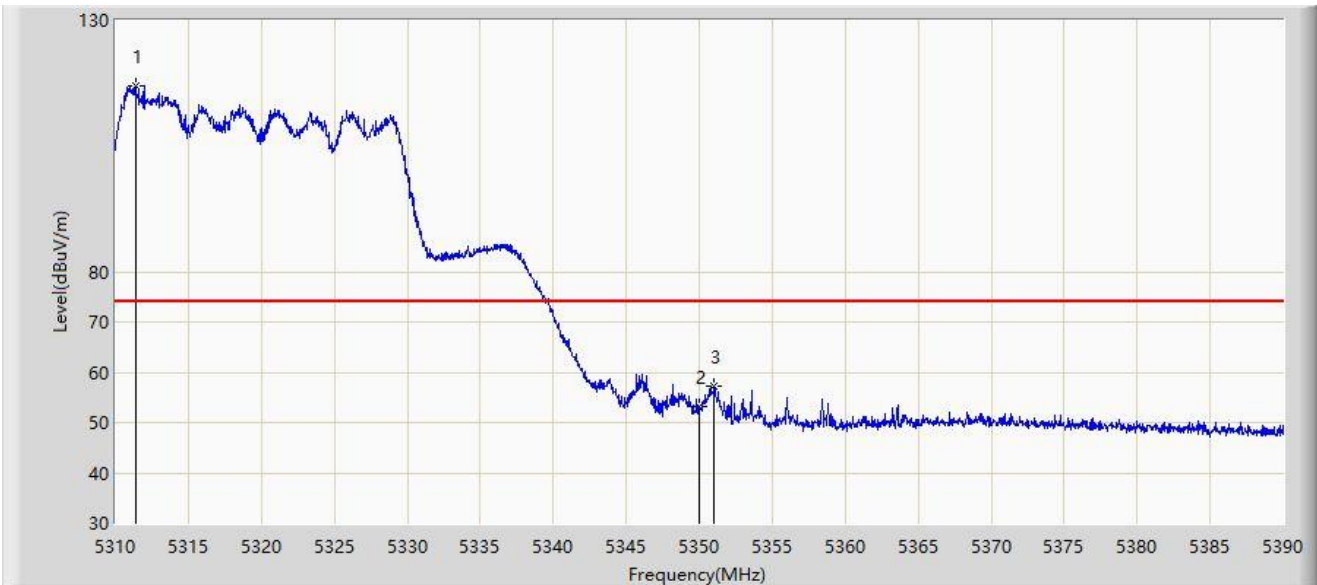


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5311.360	116.855	72.159	N/A	N/A	44.696	PK
2		5350.000	53.241	54.114	-20.759	74.000	-0.873	PK
3	*	5351.040	57.324	58.665	-16.676	74.000	-1.341	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

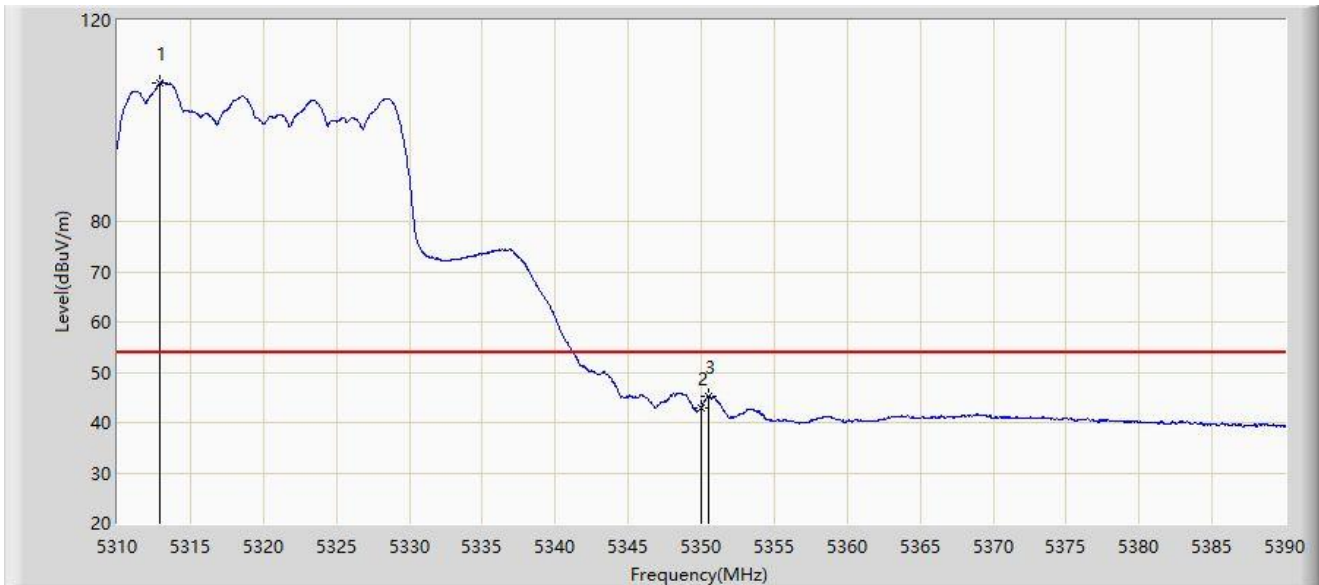


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5312.920	107.498	60.212	N/A	N/A	47.287	AV
2		5350.000	43.042	43.915	-10.958	54.000	-0.873	AV
3	*	5350.520	45.148	46.299	-8.852	54.000	-1.150	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

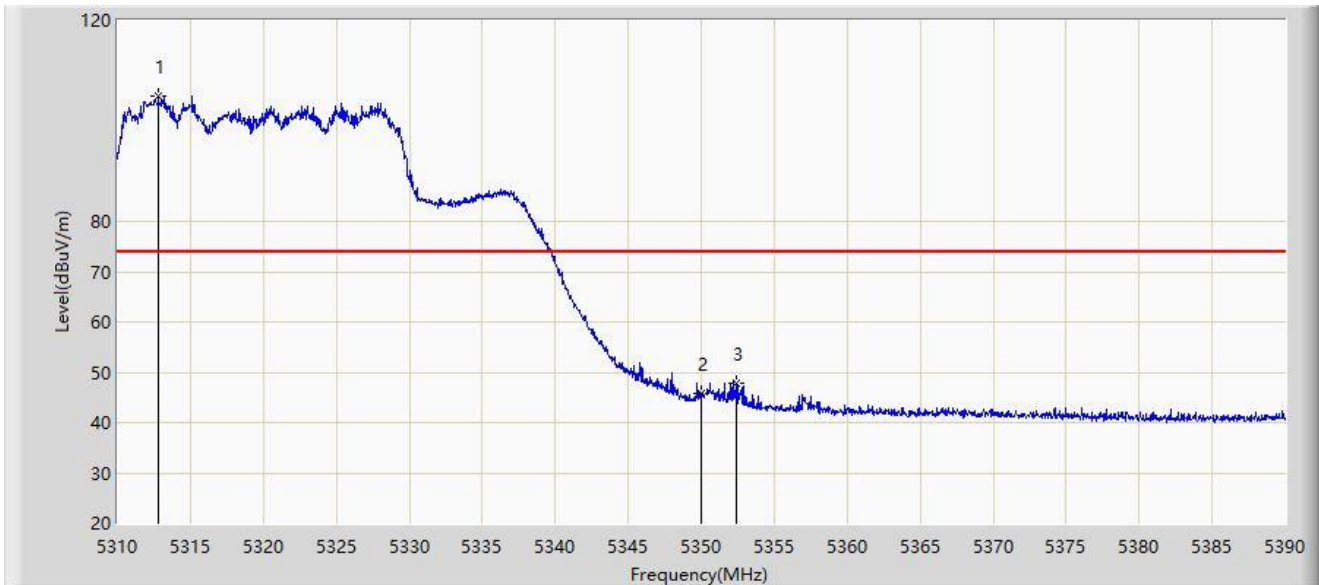


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5312.800	105.021	57.824	N/A	N/A	47.197	PK
2		5350.000	45.801	46.674	-28.199	74.000	-0.873	PK
3	*	5352.400	47.846	49.571	-26.154	74.000	-1.725	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5320MHz	

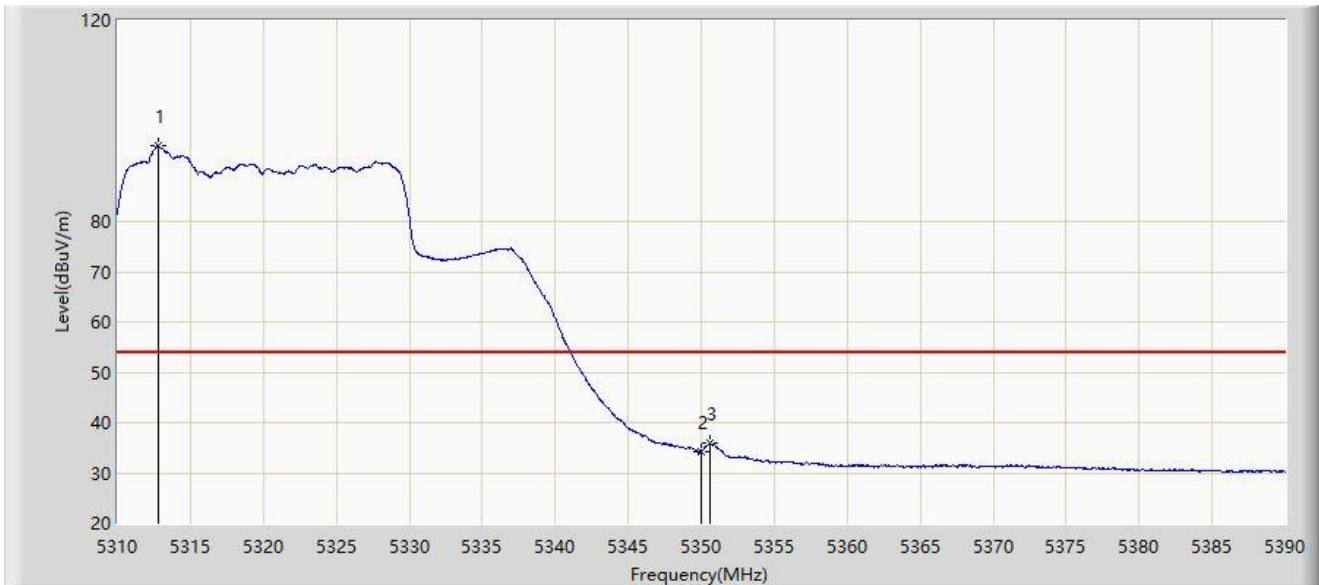

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5312.800	95.026	47.829	N/A	N/A	47.197	AV
2		5350.000	34.213	35.086	-19.787	54.000	-0.873	AV
3	*	5350.640	35.809	37.004	-18.191	54.000	-1.194	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5460.000	58.002	60.303	-10.198	68.200	-2.301	PK
2	*	5469.105	67.686	68.440	-0.514	68.200	-0.753	PK
3		5470.000	63.342	63.932	-4.858	68.200	-0.591	PK
4		5504.340	119.364	74.314	N/A	N/A	45.050	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

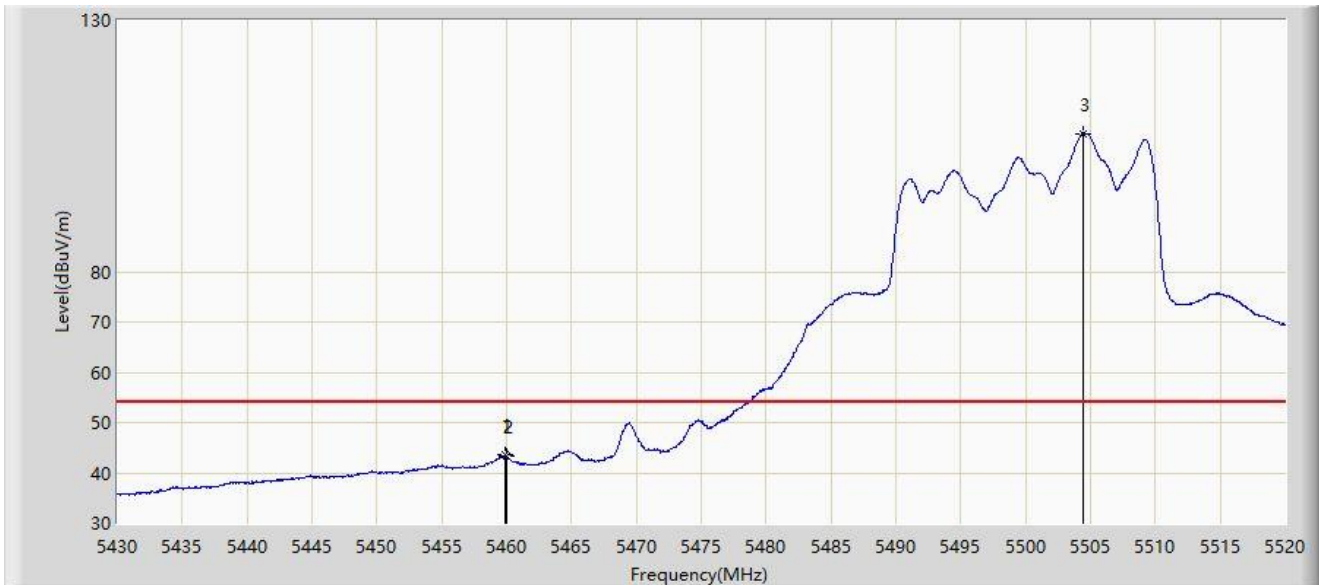


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5459.925	43.567	45.875	-10.433	54.000	-2.307	AV
2		5460.000	43.234	45.535	-10.766	54.000	-2.301	AV
3		5504.430	107.497	62.330	N/A	N/A	45.167	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

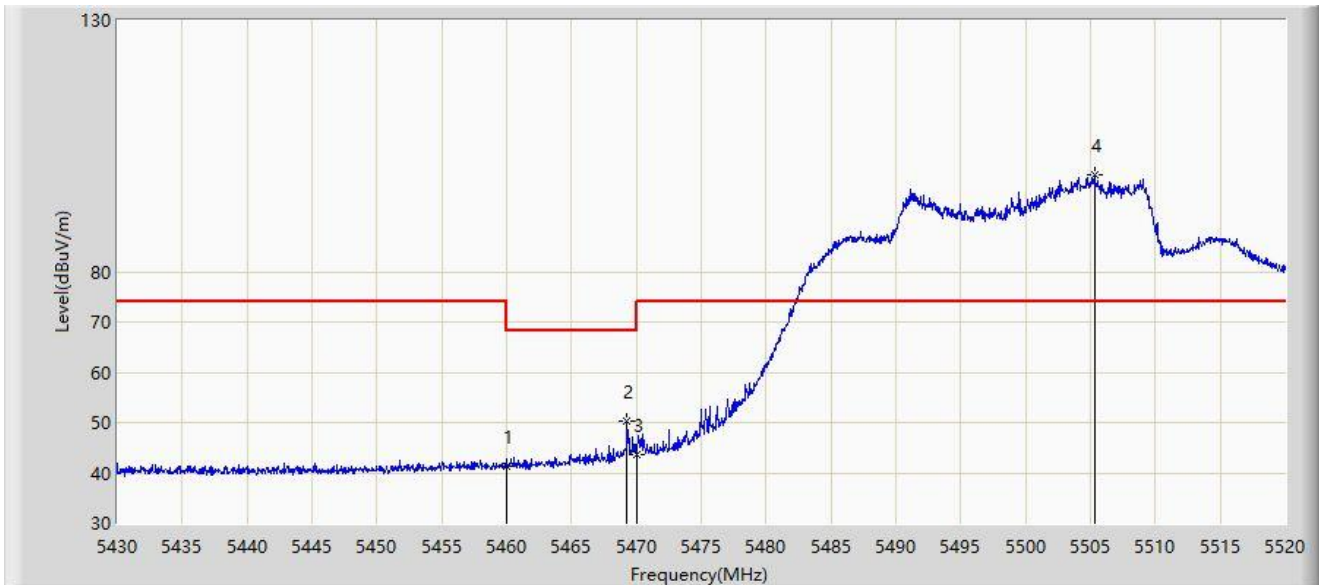


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5460.000	41.443	43.744	-26.757	68.200	-2.301	PK
2	*	5469.240	50.185	50.883	-18.015	68.200	-0.698	PK
3		5470.000	43.634	44.224	-24.566	68.200	-0.591	PK
4		5505.285	99.380	53.670	N/A	N/A	45.710	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5500MHz	

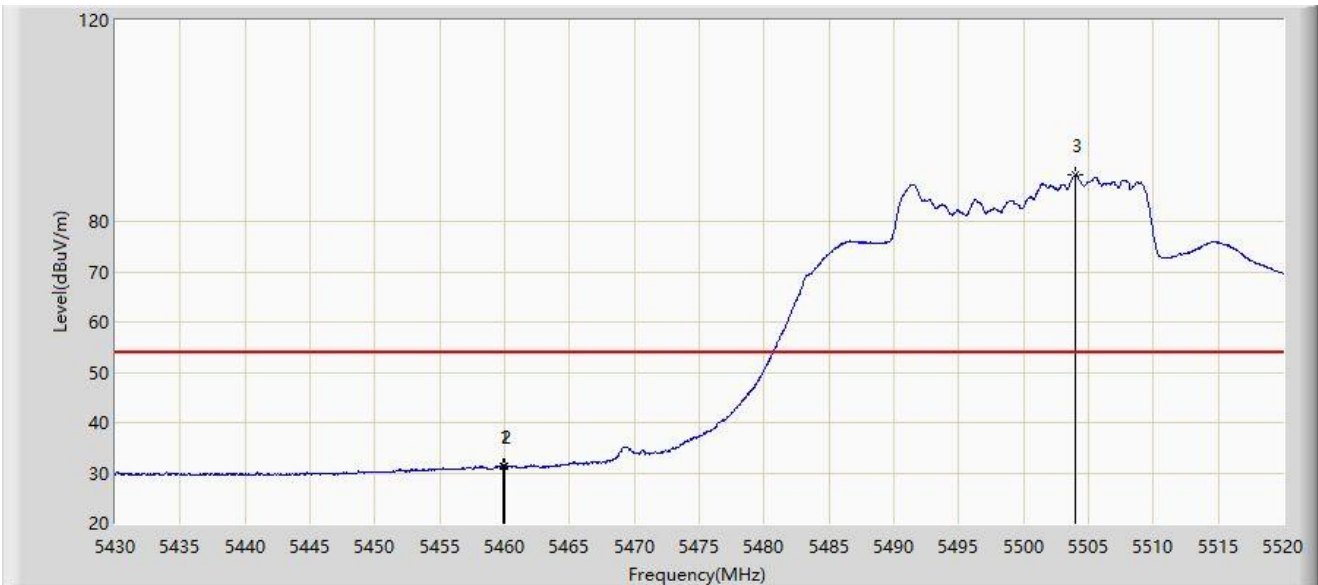


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.880	31.325	33.637	-22.675	54.000	-2.311	AV
2		5460.000	31.197	33.498	-22.803	54.000	-2.301	AV
3		5503.980	89.189	44.644	N/A	N/A	44.545	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

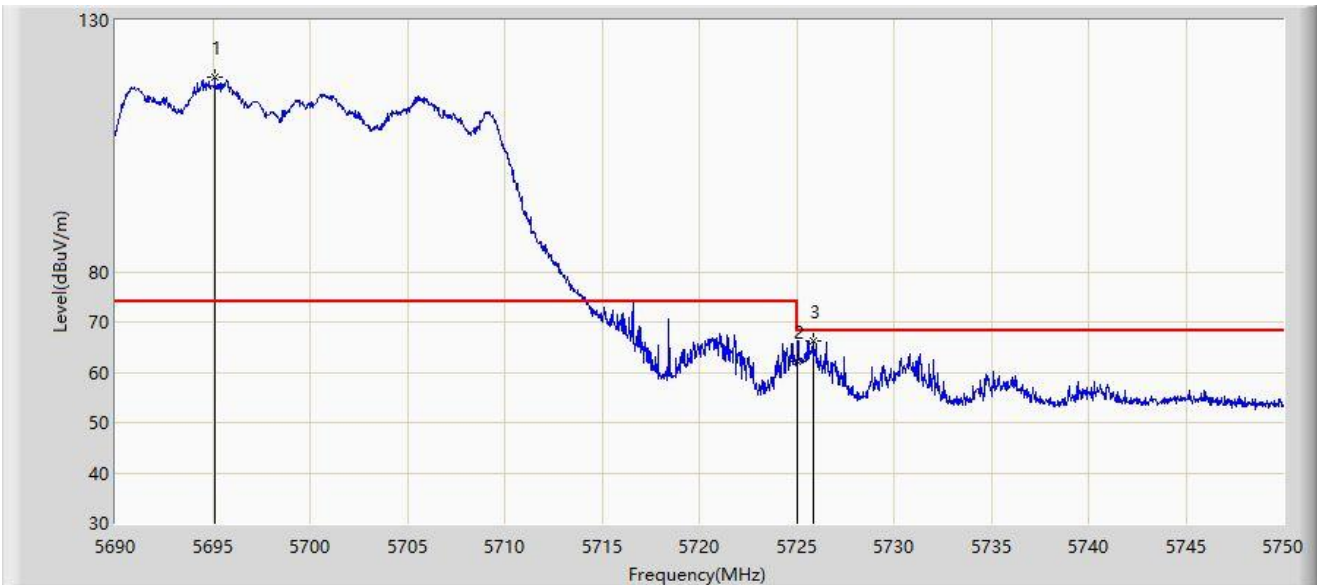


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5695.107	118.705	74.642	N/A	N/A	44.063	PK
2		5725.000	62.170	60.942	-6.030	68.200	1.227	PK
3	*	5725.853	66.376	65.614	-1.824	68.200	0.762	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5700MHz	

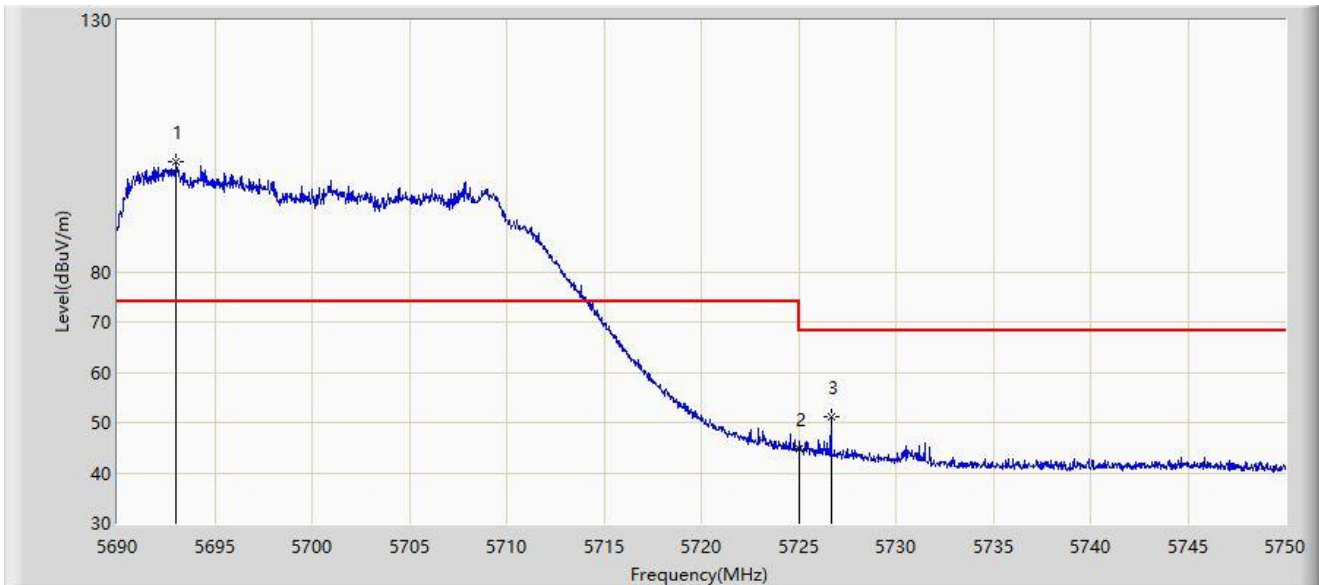


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5693.027	101.814	58.249	N/A	N/A	43.566	PK
2		5725.000	44.898	43.670	-23.302	68.200	1.227	PK
3	*	5726.665	51.292	50.889	-16.908	68.200	0.402	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5.8G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

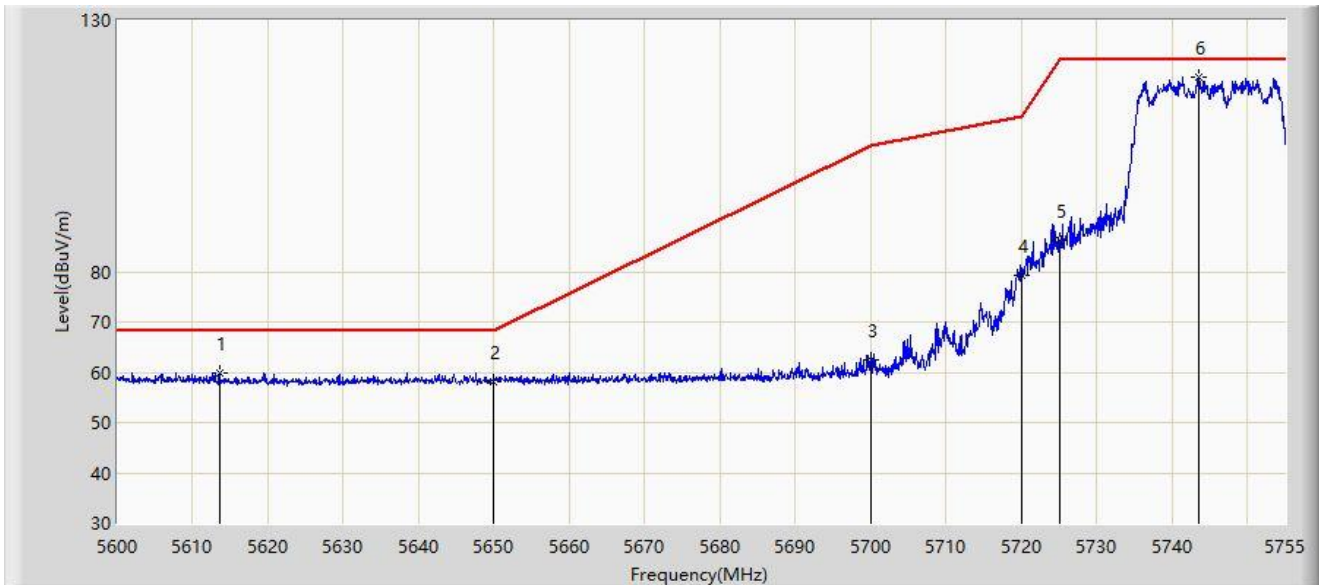


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5613.562	59.756	65.656	-8.444	68.200	-5.900	PK
2		5650.000	58.084	64.071	-10.116	68.200	-5.988	PK
3		5700.000	62.510	68.115	-42.690	105.200	-5.605	PK
4		5720.000	79.249	84.797	-31.551	110.800	-5.549	PK
5		5725.000	86.113	91.585	-36.087	122.200	-5.473	PK
6		5743.530	118.759	124.271	N/A	N/A	-5.511	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5.8G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5745MHz	

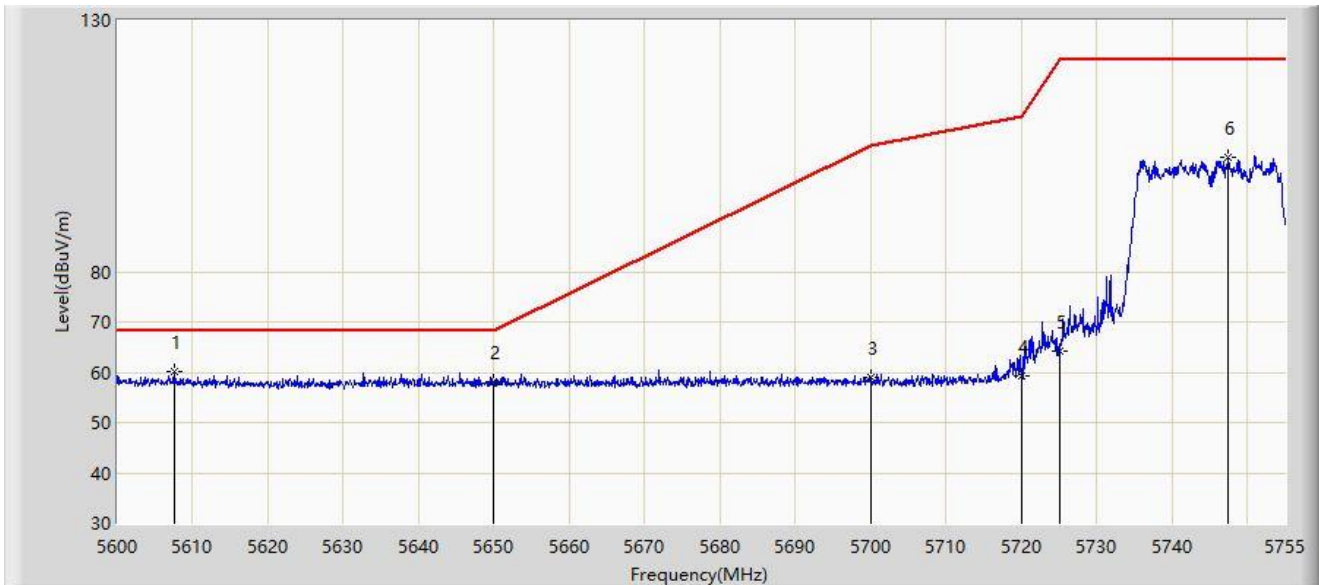


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5607.595	60.113	65.862	-8.087	68.200	-5.749	PK
2		5650.000	58.189	64.176	-10.011	68.200	-5.988	PK
3		5700.000	58.922	64.527	-46.278	105.200	-5.605	PK
4		5720.000	59.185	64.733	-51.615	110.800	-5.549	PK
5		5725.000	64.161	69.633	-58.039	122.200	-5.473	PK
6		5747.482	102.828	108.446	N/A	N/A	-5.617	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5.8G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

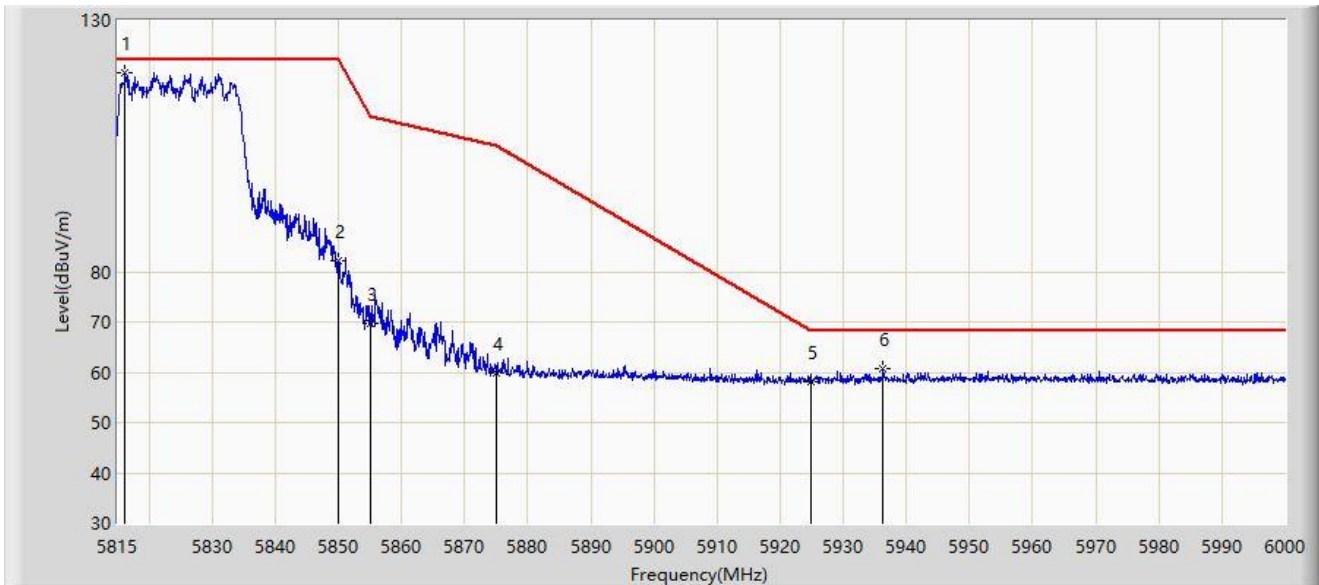


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5816.203	119.637	125.308	N/A	N/A	-5.671	PK
2		5850.000	82.192	87.544	-40.008	122.200	-5.352	PK
3		5855.000	69.687	75.069	-41.113	110.800	-5.382	PK
4		5875.000	59.938	64.964	-45.262	105.200	-5.026	PK
5		5925.000	58.247	63.790	-9.953	68.200	-5.543	PK
6	*	5936.268	60.629	66.153	-7.571	68.200	-5.525	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5.8G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5825MHz	

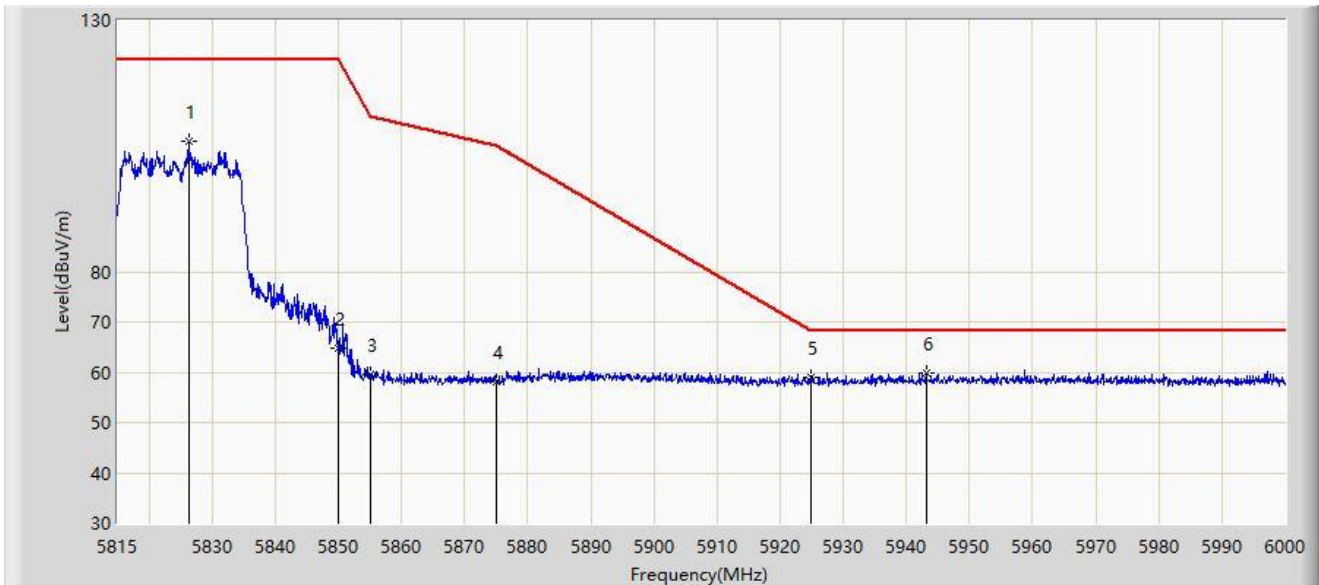


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5826.285	105.906	111.373	N/A	N/A	-5.466	PK
2		5850.000	64.857	70.209	-57.343	122.200	-5.352	PK
3		5855.000	59.482	64.864	-51.318	110.800	-5.382	PK
4		5875.000	57.977	63.003	-47.223	105.200	-5.026	PK
5		5925.000	59.065	64.608	-9.135	68.200	-5.543	PK
6	*	5943.112	59.997	65.458	-8.203	68.200	-5.462	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

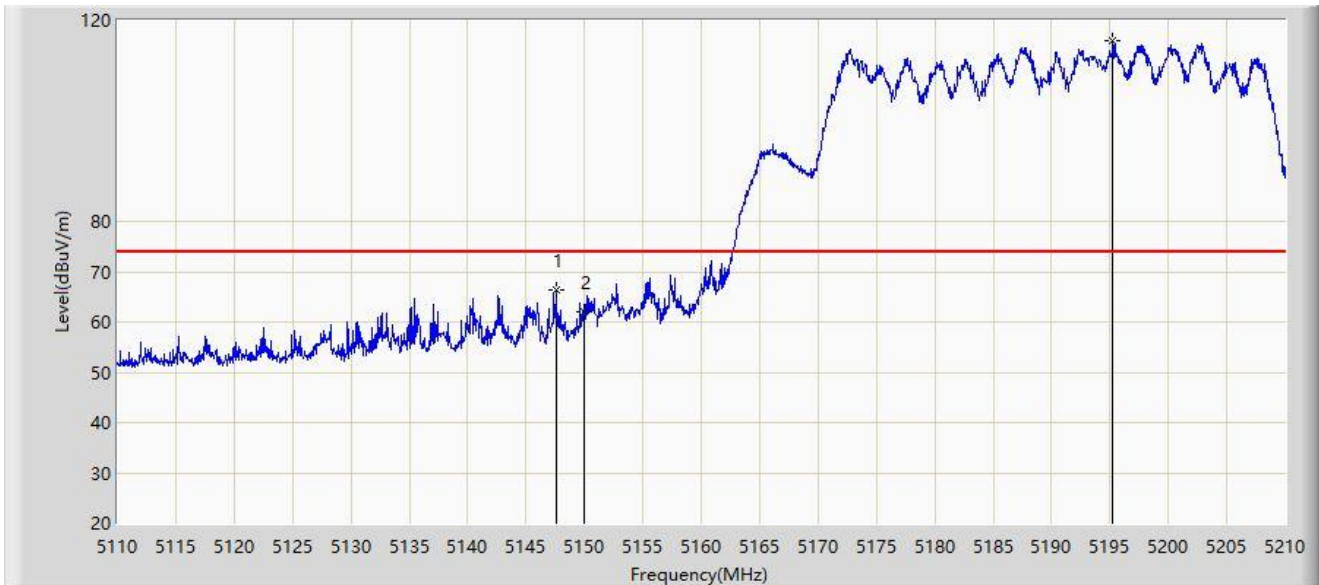


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5147.600	66.486	68.610	-7.514	74.000	-2.124	PK
2		5150.000	62.148	63.872	-11.852	74.000	-1.724	PK
3		5195.250	115.955	80.917	N/A	N/A	35.038	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

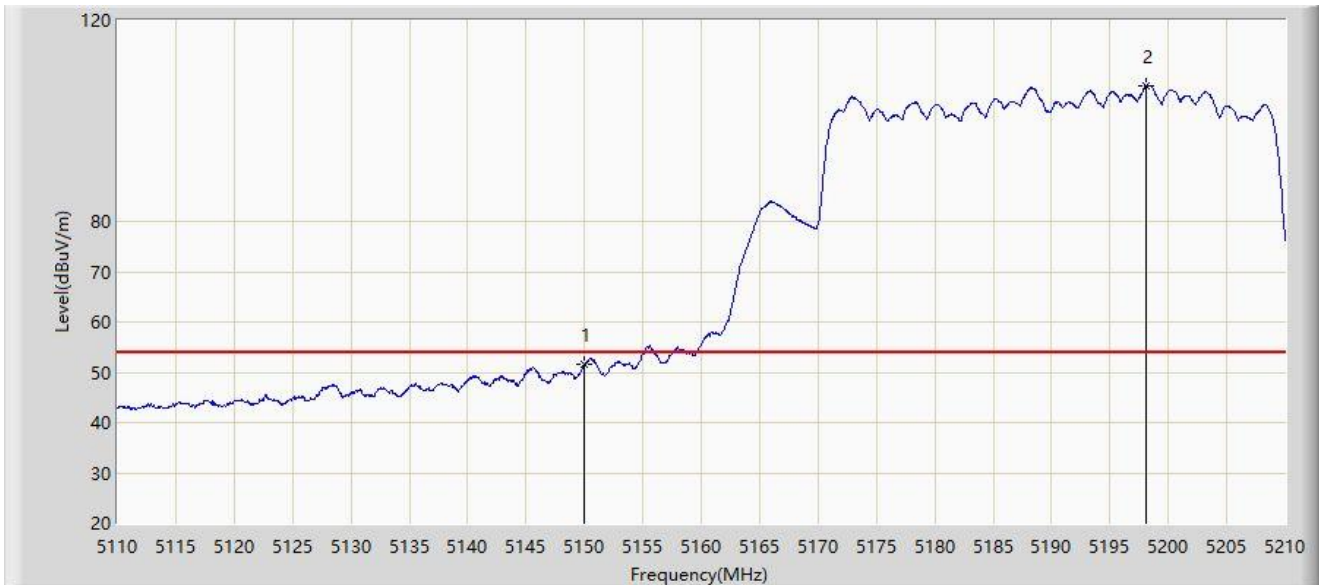


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5150.000	51.513	53.237	-2.487	54.000	-1.724	AV
2		5198.150	106.951	70.855	N/A	N/A	36.096	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

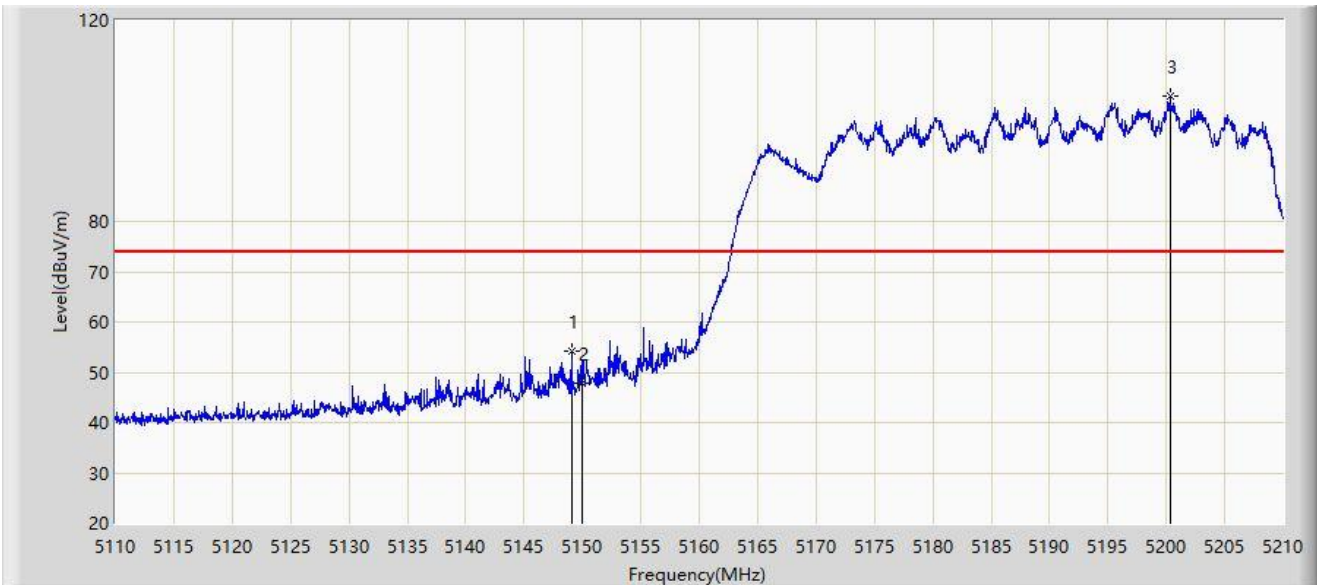


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5149.050	54.278	56.180	-19.722	74.000	-1.902	PK
2		5150.000	47.950	49.674	-26.050	74.000	-1.724	PK
3		5200.300	104.821	65.863	N/A	N/A	38.958	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5190MHz	

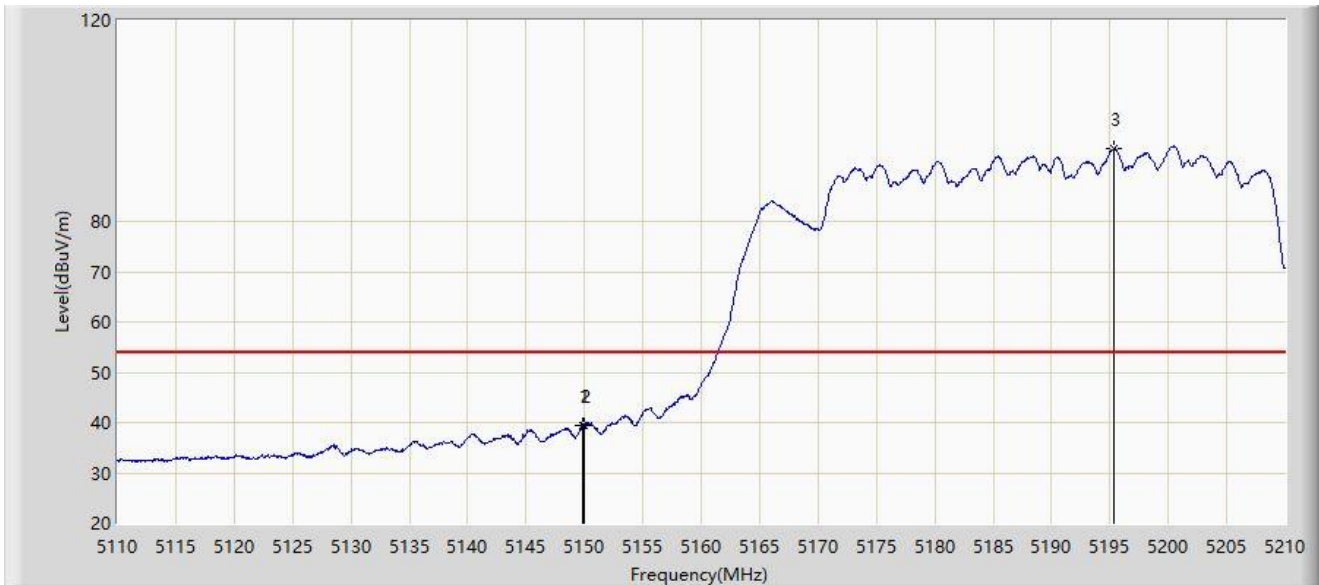

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.800	39.456	41.210	-14.544	54.000	-1.754	AV
2		5150.000	39.317	41.041	-14.683	54.000	-1.724	AV
3		5195.300	94.428	59.399	N/A	N/A	35.030	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5311.350	117.086	72.409	N/A	N/A	44.678	PK
2		5350.000	58.665	59.538	-15.335	74.000	-0.873	PK
3	*	5350.200	66.592	67.573	-7.408	74.000	-0.981	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

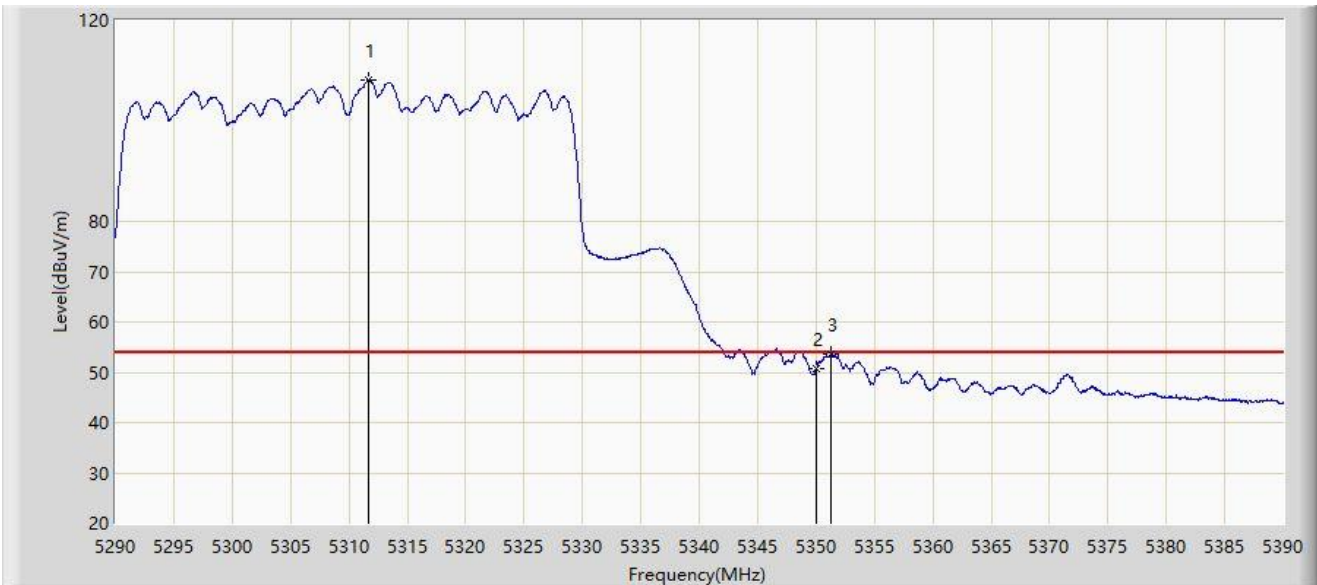


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5311.700	108.235	62.919	N/A	N/A	45.315	AV
2		5350.000	50.720	51.593	-3.280	54.000	-0.873	AV
3	*	5351.250	53.582	55.000	-0.418	54.000	-1.418	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

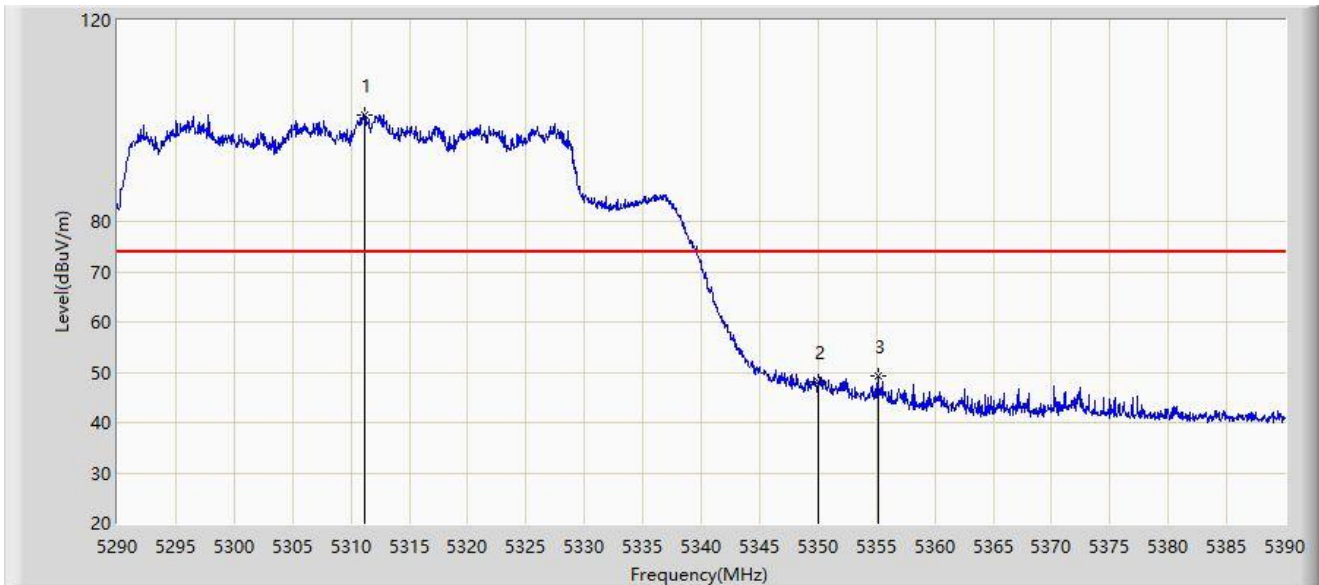


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5311.150	101.230	56.917	N/A	N/A	44.313	PK
2		5350.000	48.021	48.894	-25.979	74.000	-0.873	PK
3	*	5355.150	49.368	51.708	-24.632	74.000	-2.340	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5310MHz	

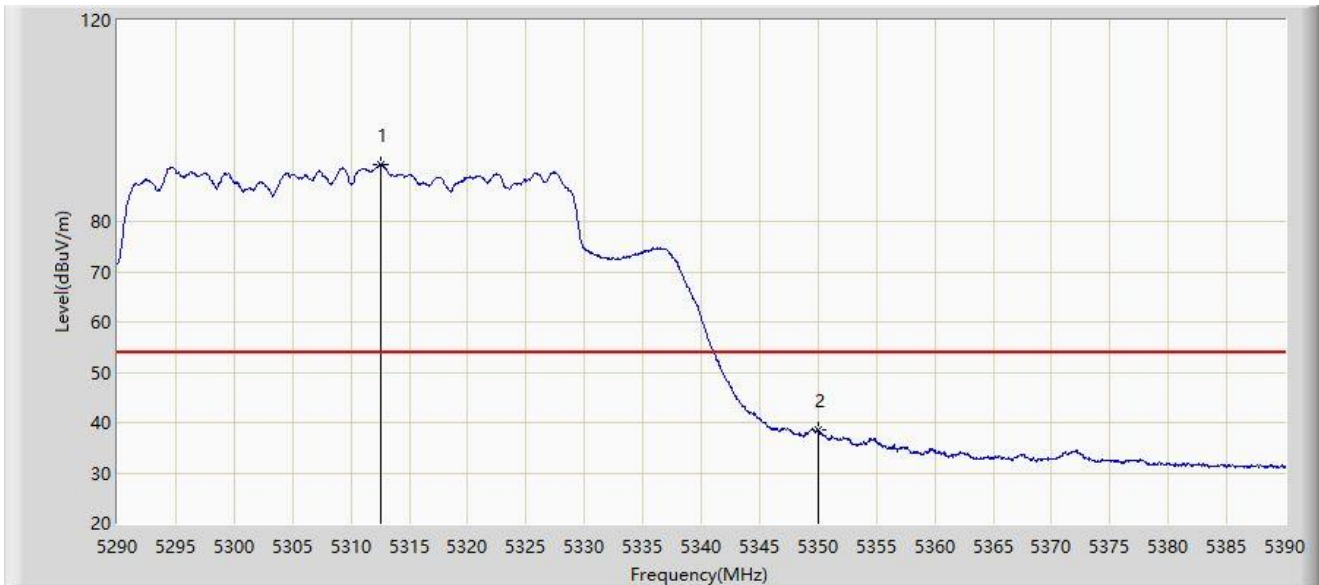

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5312.600	91.287	44.345	N/A	N/A	46.942	AV
2	*	5350.000	38.557	39.430	-15.443	54.000	-0.873	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	



No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5460.000	61.028	63.329	-7.172	68.200	-2.301	PK
2	*	5464.500	66.848	68.624	-1.352	68.200	-1.776	PK
3		5470.000	64.133	64.723	-4.067	68.200	-0.591	PK
4		5504.200	115.312	70.455	N/A	N/A	44.858	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5459.750	45.647	47.970	-8.353	54.000	-2.323	AV
2		5460.000	45.382	47.683	-8.618	54.000	-2.301	AV
3		5504.550	104.354	59.050	N/A	N/A	45.304	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	

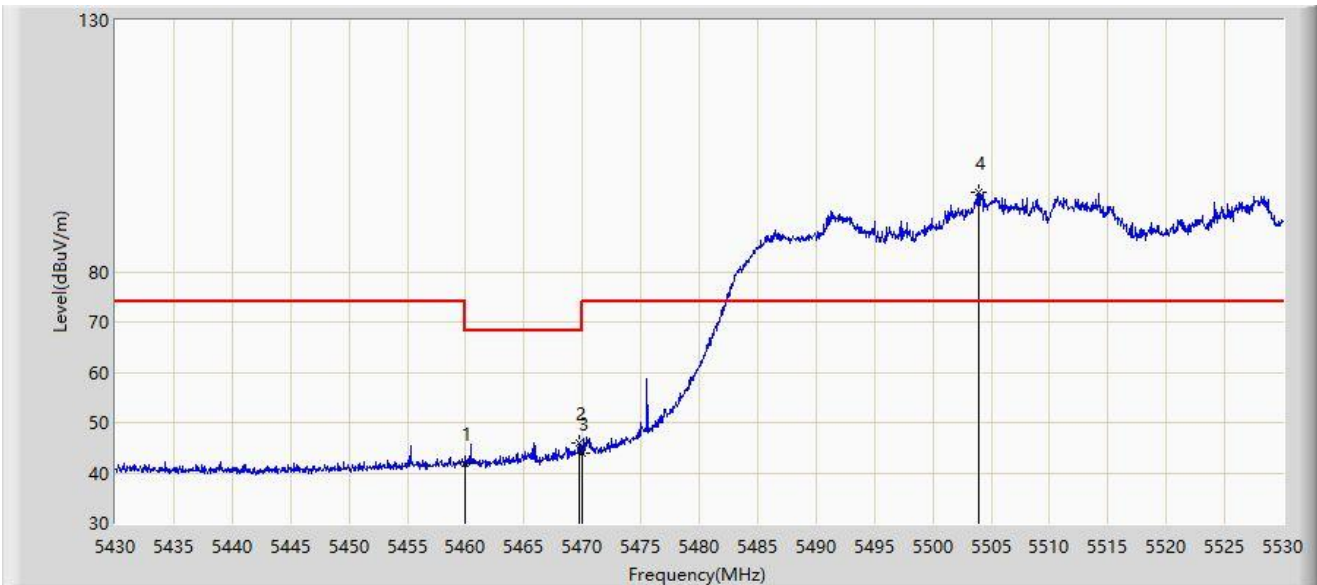

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5460.000	41.950	44.251	-26.250	68.200	-2.301	PK
2	*	5469.700	45.902	46.543	-22.298	68.200	-0.641	PK
3		5470.000	44.020	44.610	-24.180	68.200	-0.591	PK
4		5503.900	95.697	51.302	N/A	N/A	44.394	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5510MHz	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	31.827	34.128	-22.173	54.000	-2.301	AV
2		5504.150	85.714	40.925	N/A	N/A	44.789	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

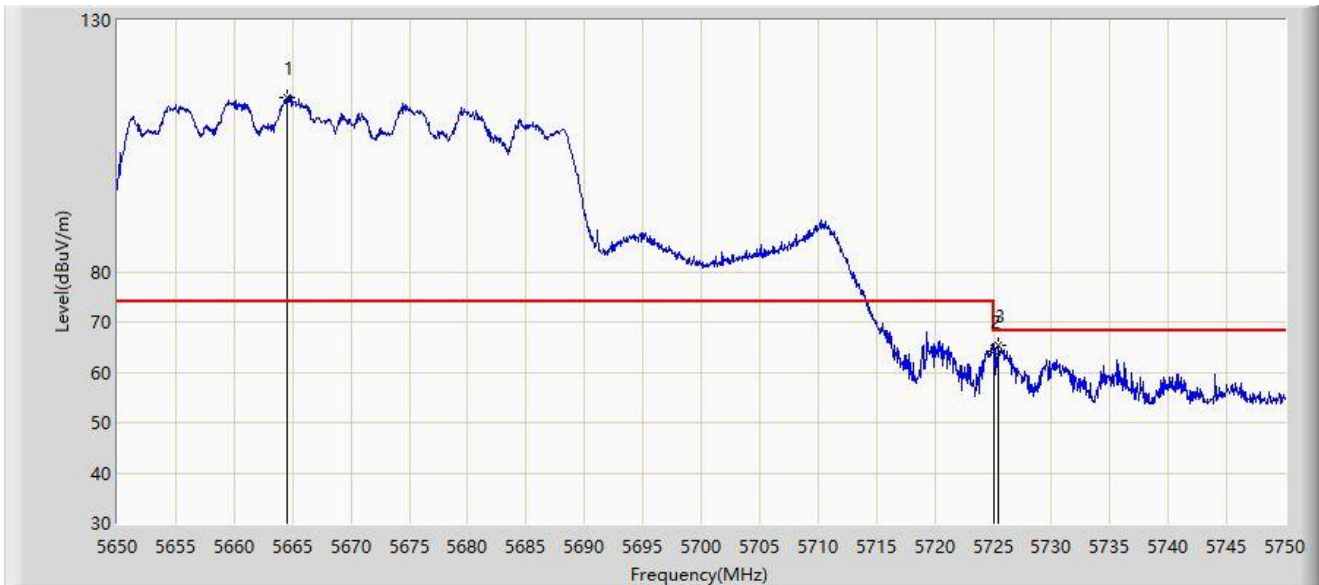


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5664.550	114.700	72.437	N/A	N/A	42.263	PK
2		5725.000	64.143	62.915	-4.057	68.200	1.227	PK
3	*	5725.500	65.394	64.442	-2.806	68.200	0.952	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5670MHz	

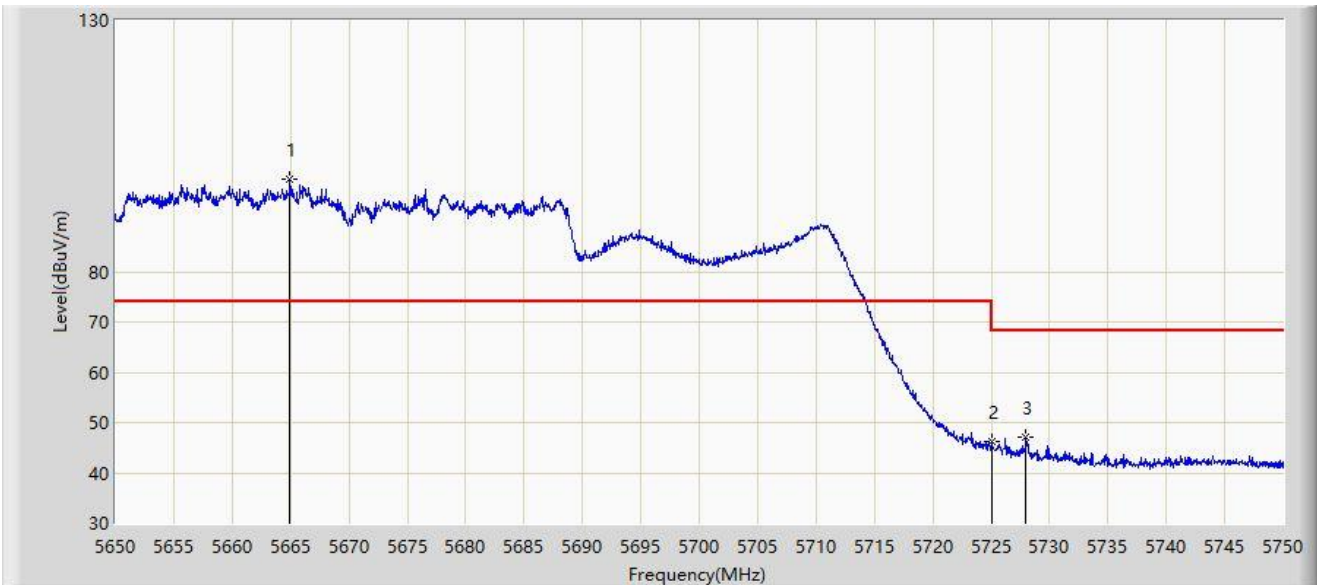


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5664.900	98.275	55.375	N/A	N/A	42.900	PK
2		5725.000	46.188	44.960	-22.012	68.200	1.227	PK
3	*	5727.950	47.112	47.181	-21.088	68.200	-0.069	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5.8G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

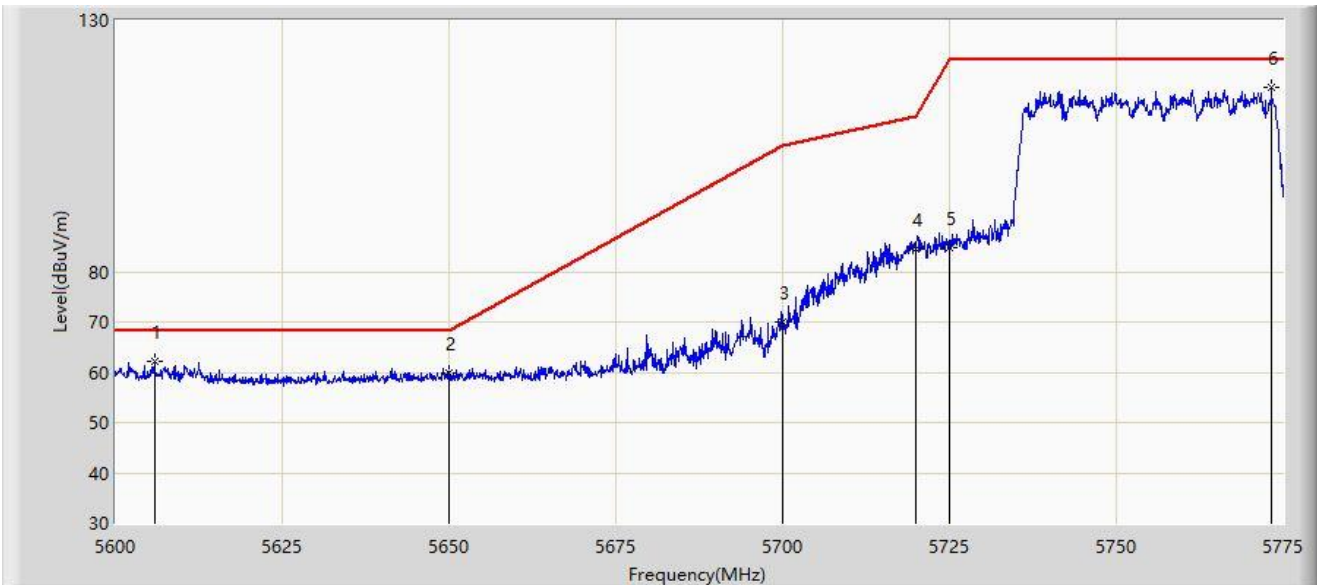


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5605.862	62.217	67.962	-5.983	68.200	-5.744	PK
2		5650.000	59.714	65.701	-8.486	68.200	-5.988	PK
3		5700.000	70.090	75.695	-35.110	105.200	-5.605	PK
4		5720.000	84.540	90.088	-26.260	110.800	-5.549	PK
5		5725.000	84.784	90.256	-37.416	122.200	-5.473	PK
6		5773.250	116.591	122.394	N/A	N/A	-5.803	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5.8G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

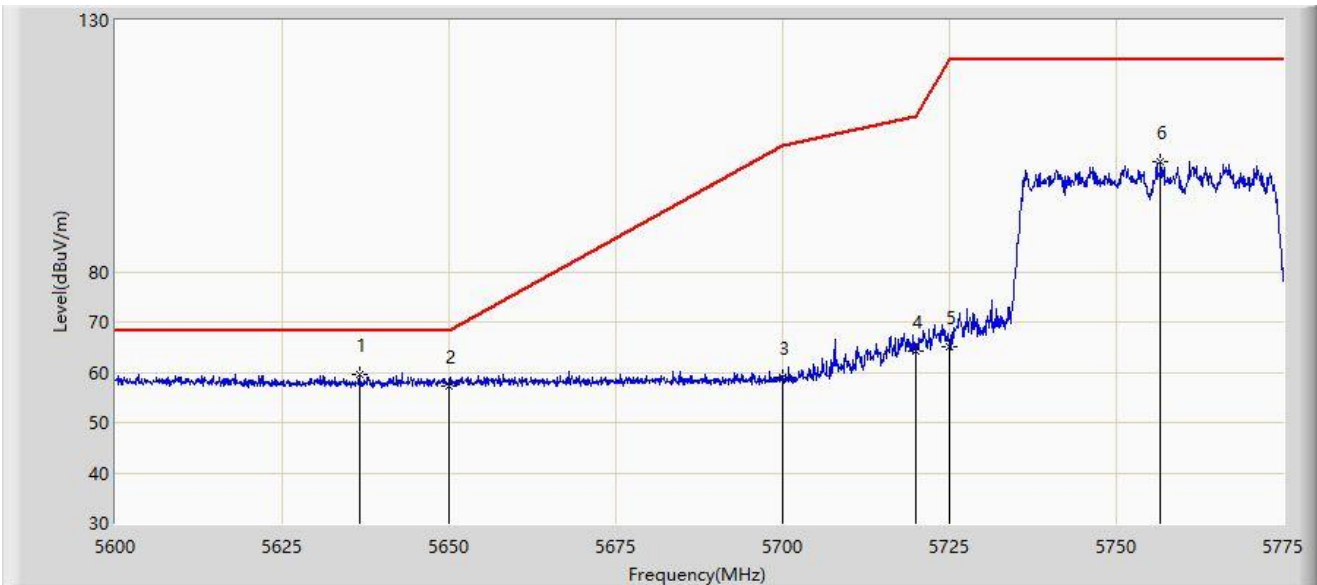


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5636.575	59.587	65.617	-8.613	68.200	-6.030	PK
2		5650.000	57.201	63.188	-10.999	68.200	-5.988	PK
3		5700.000	58.931	64.536	-46.269	105.200	-5.605	PK
4		5720.000	64.102	69.650	-46.698	110.800	-5.549	PK
5		5725.000	65.047	70.519	-57.153	122.200	-5.473	PK
6		5756.625	101.996	107.859	N/A	N/A	-5.863	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5.8G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

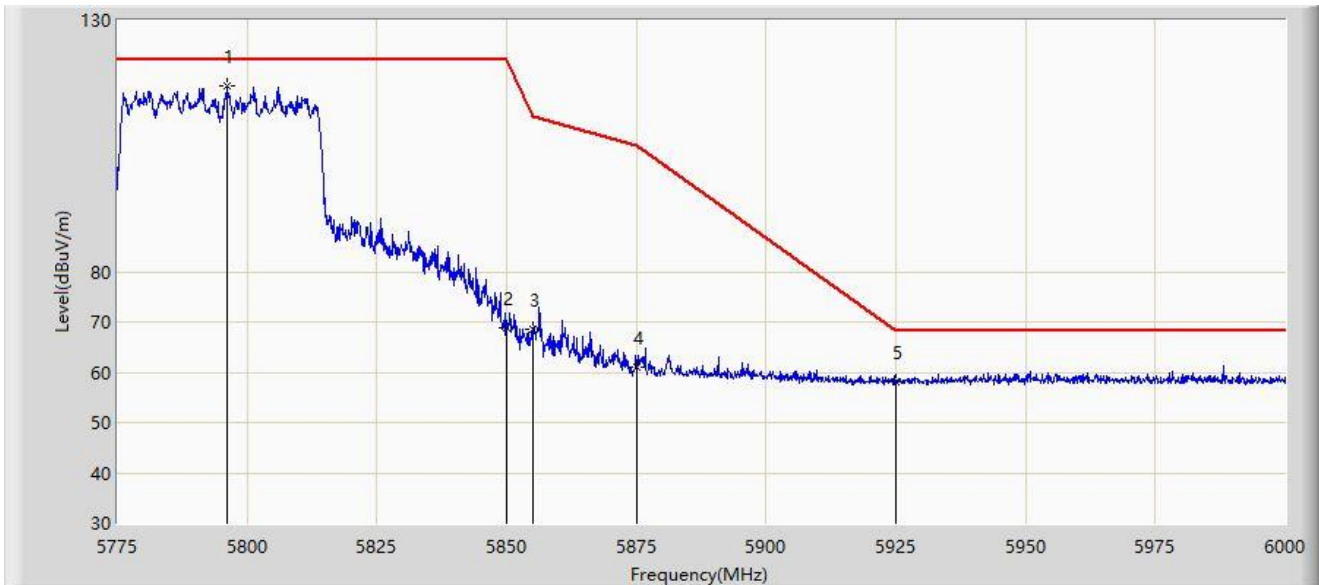


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5796.150	116.883	122.818	N/A	N/A	-5.935	PK
2		5850.000	68.769	74.121	-53.431	122.200	-5.352	PK
3		5855.000	68.442	73.824	-42.358	110.800	-5.382	PK
4		5875.000	61.103	66.129	-44.097	105.200	-5.026	PK
5	*	5925.000	58.165	63.708	-10.035	68.200	-5.543	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5.8G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

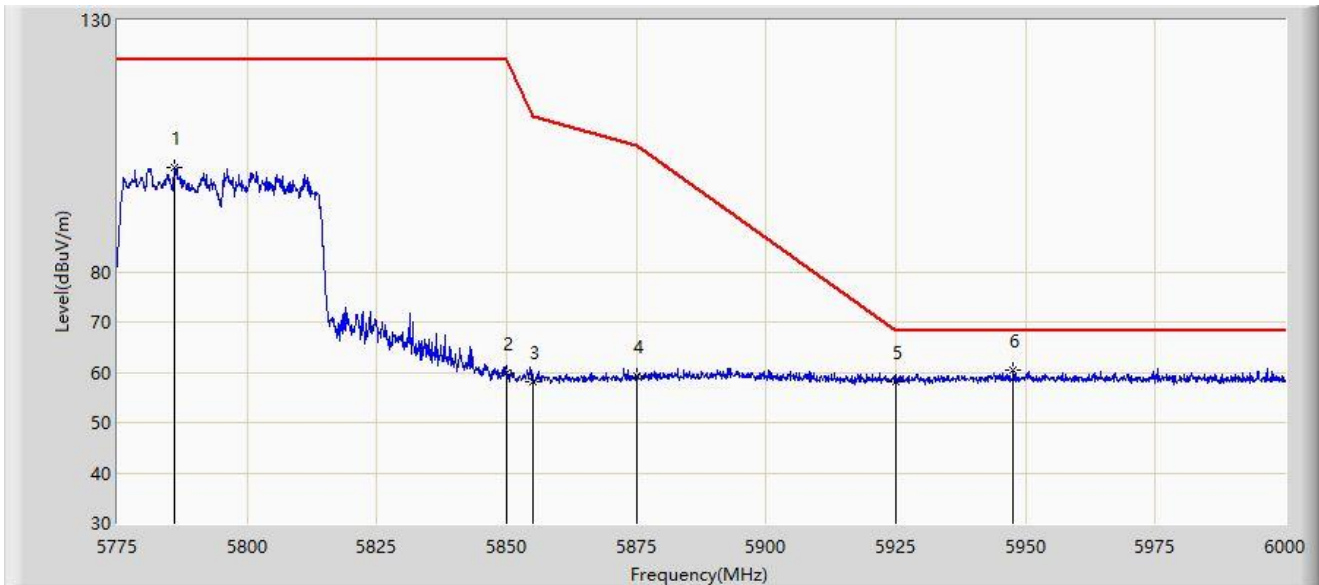


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5786.025	100.685	106.550	N/A	N/A	-5.865	PK
2		5850.000	59.927	65.279	-62.273	122.200	-5.352	PK
3		5855.000	57.983	63.365	-52.817	110.800	-5.382	PK
4		5875.000	59.318	64.344	-45.882	105.200	-5.026	PK
5		5925.000	58.226	63.769	-9.974	68.200	-5.543	PK
6	*	5947.687	60.551	65.972	-7.649	68.200	-5.421	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

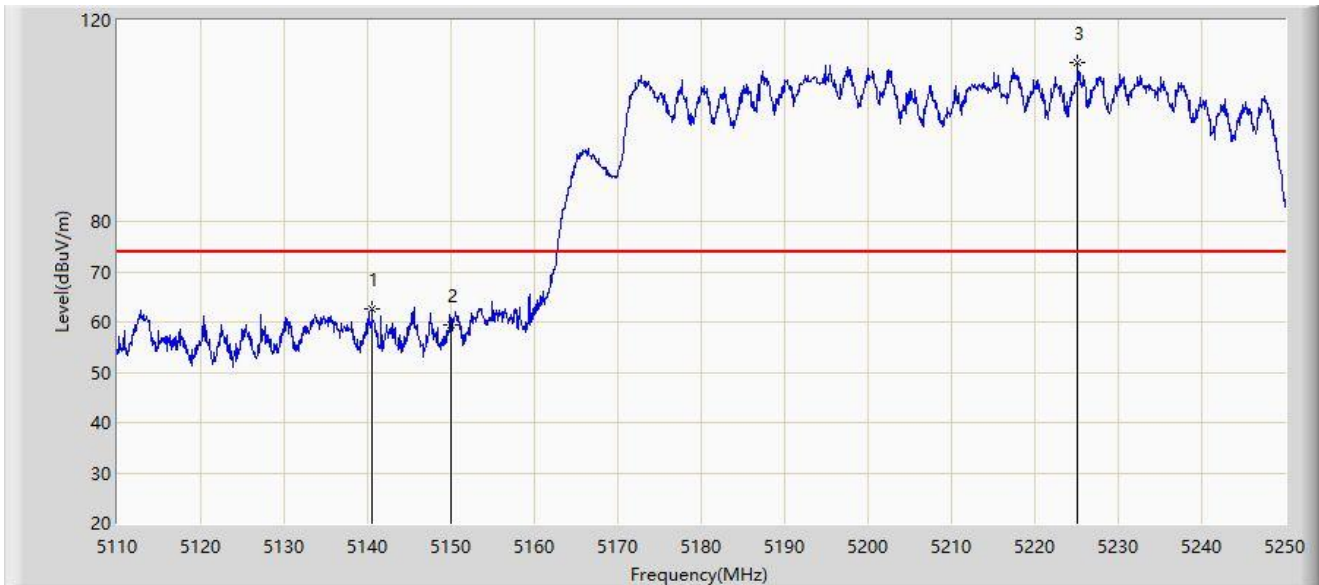


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5140.520	62.558	65.548	-11.442	74.000	-2.990	PK
2		5150.000	59.499	61.223	-14.501	74.000	-1.724	PK
3		5225.150	111.712	74.773	N/A	N/A	36.939	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

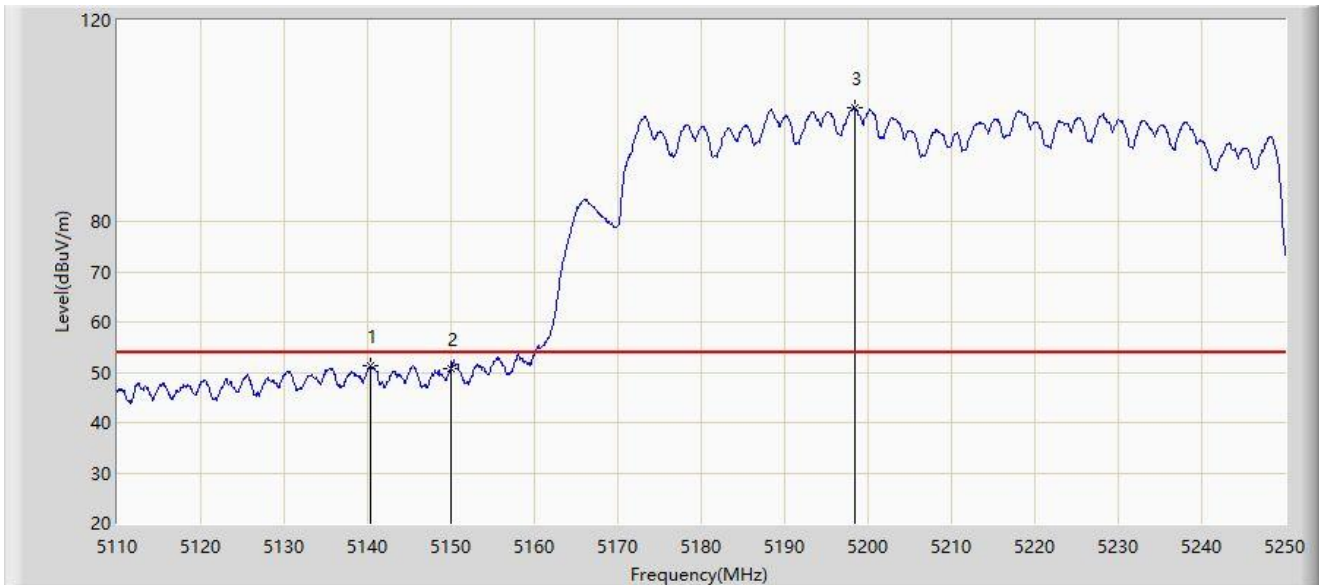


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5140.380	51.359	54.369	-2.641	54.000	-3.010	AV
2		5150.000	50.810	52.534	-3.190	54.000	-1.724	AV
3		5198.340	102.604	66.372	N/A	N/A	36.232	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

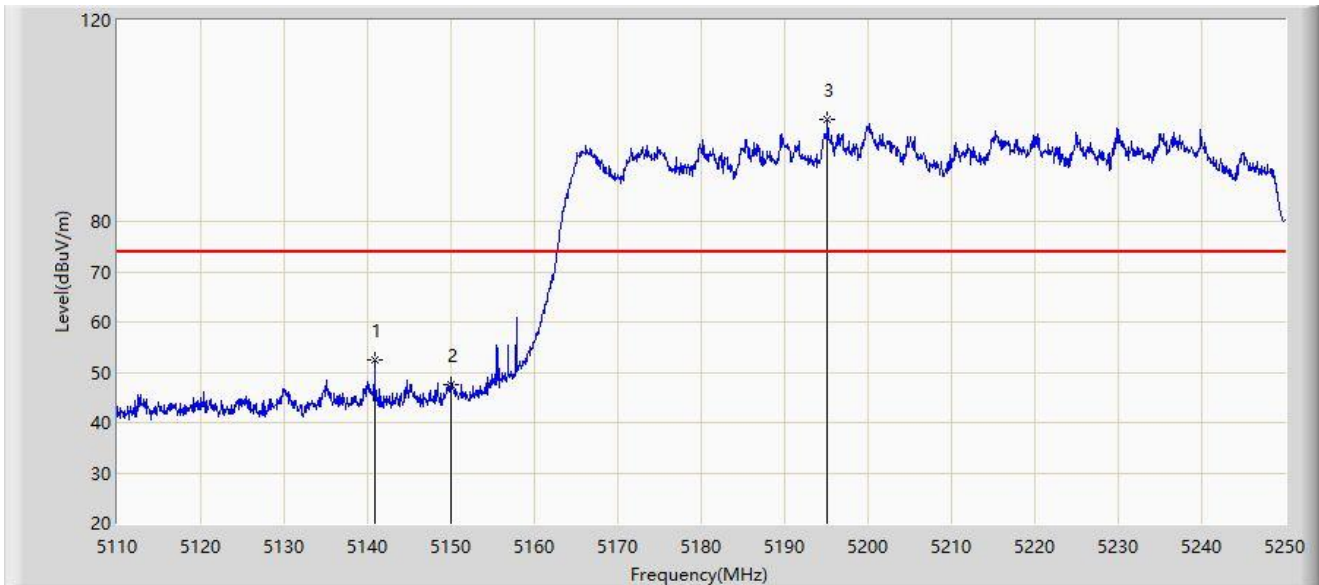


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5140.870	52.407	55.344	-21.593	74.000	-2.937	PK
2		5150.000	47.443	49.167	-26.557	74.000	-1.724	PK
3		5195.120	100.259	65.197	N/A	N/A	35.063	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

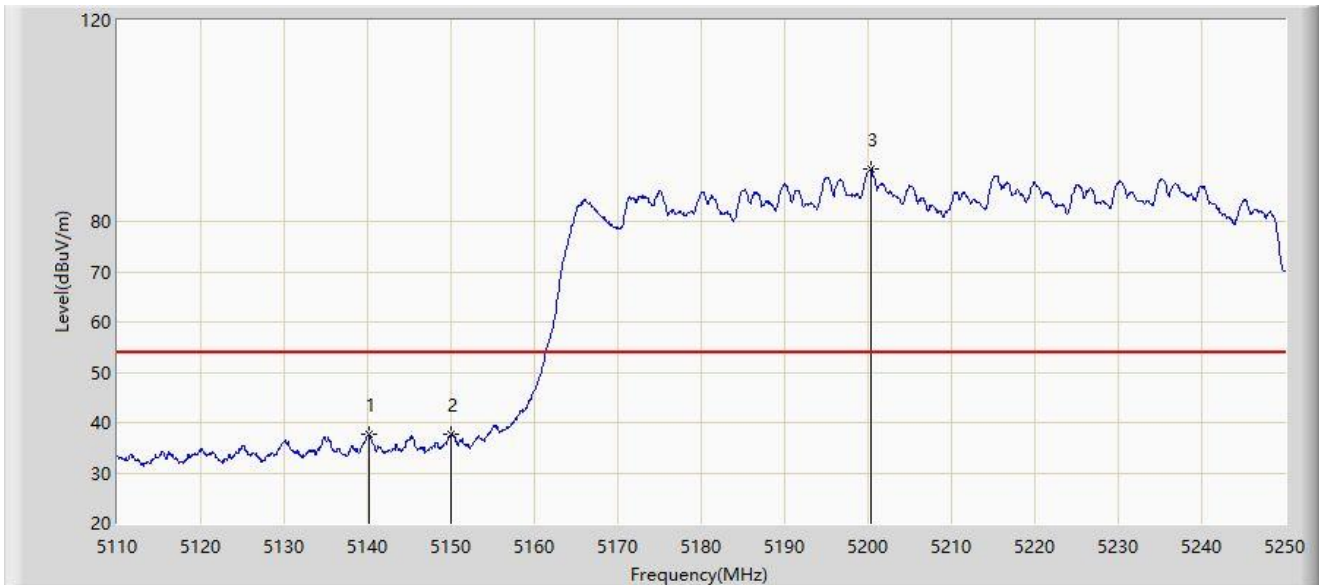


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5140.100	37.670	40.721	-16.330	54.000	-3.050	AV
2		5150.000	37.652	39.376	-16.348	54.000	-1.724	AV
3		5200.300	90.294	51.336	N/A	N/A	38.958	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

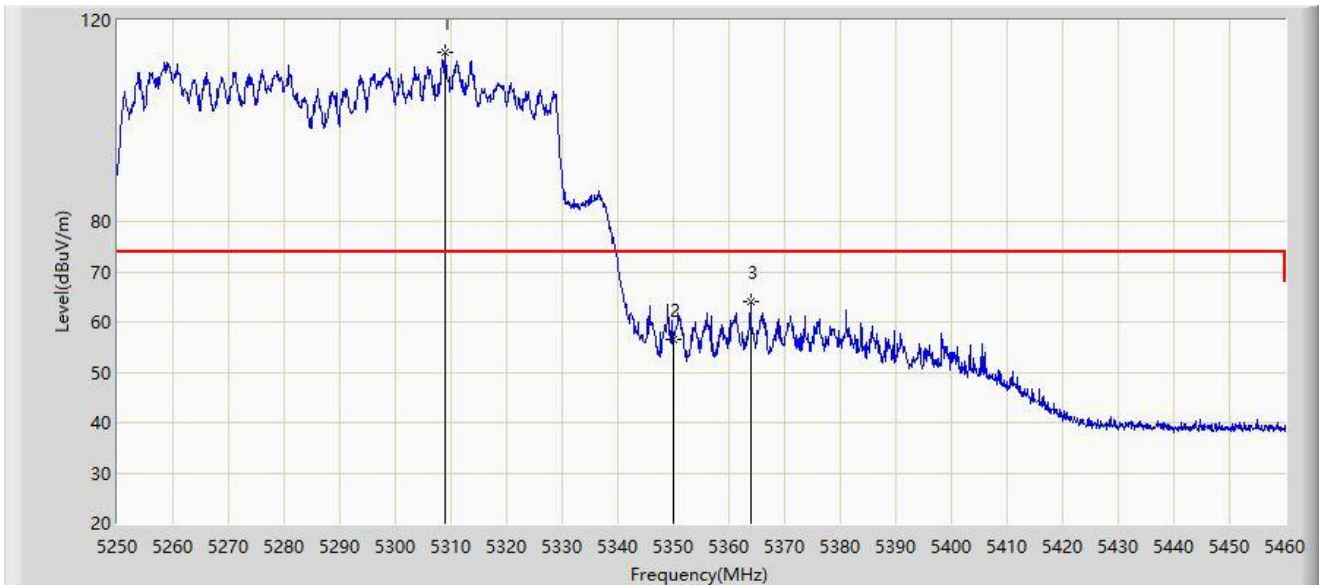


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5308.905	113.558	72.915	N/A	N/A	40.643	PK
2		5350.000	56.380	57.253	-17.620	74.000	-0.873	PK
3	*	5363.820	63.994	67.495	-10.006	74.000	-3.501	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

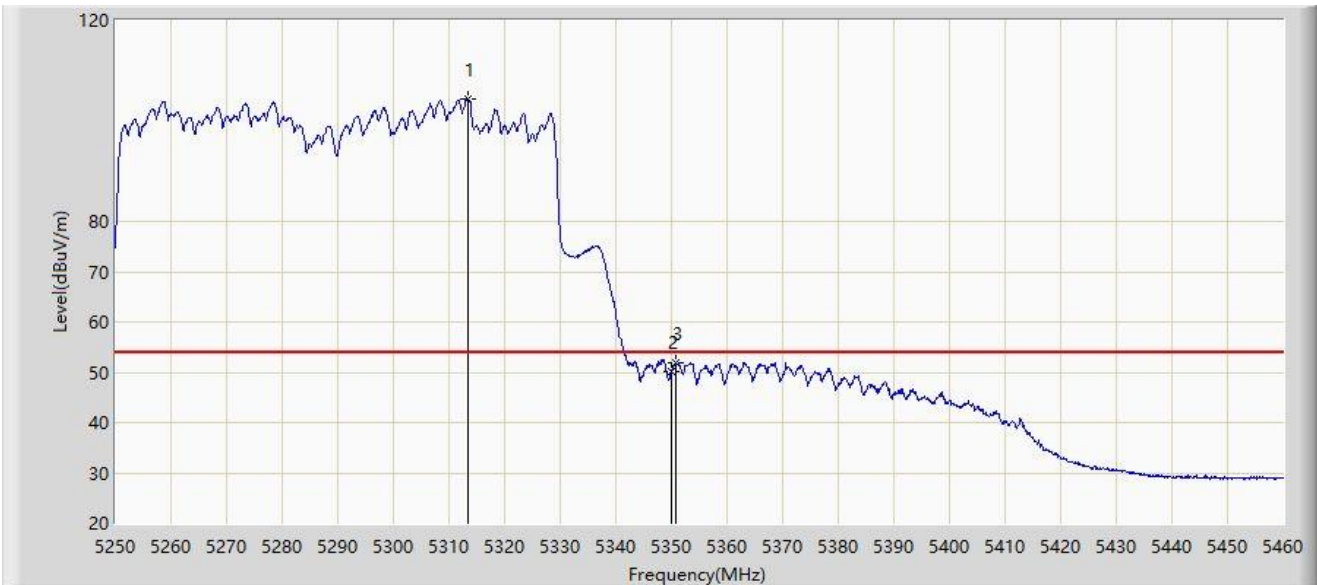


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5313.525	104.318	56.582	N/A	N/A	47.736	AV
2		5350.000	50.191	51.064	-3.809	54.000	-0.873	AV
3	*	5350.695	52.017	53.232	-1.983	54.000	-1.215	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

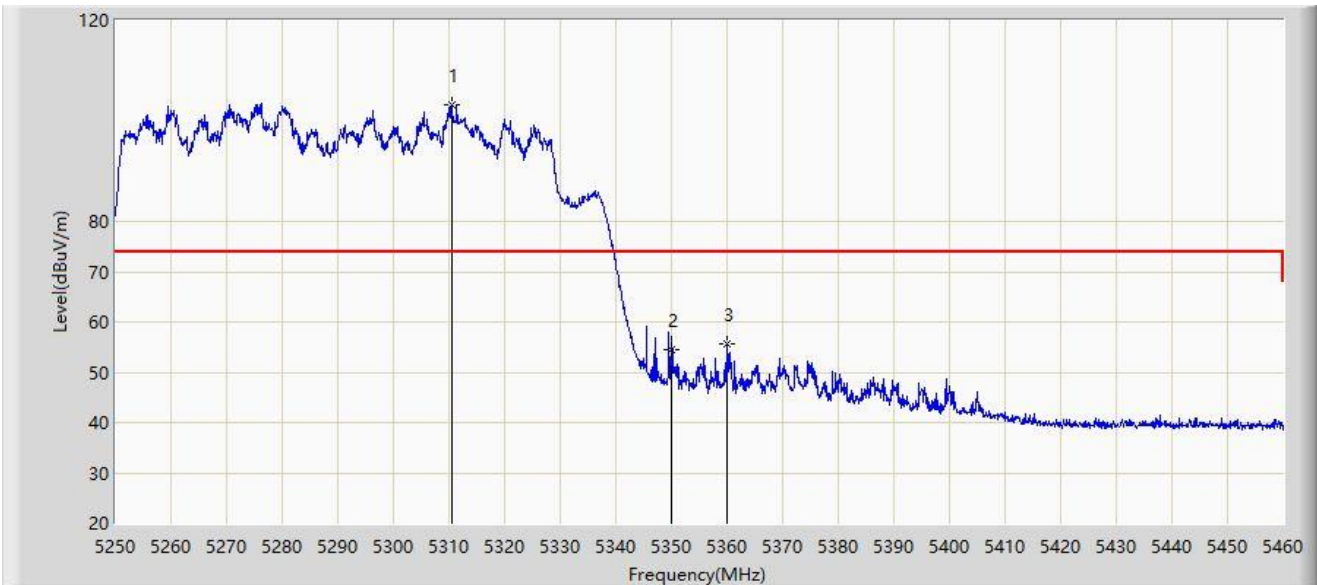


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5310.480	103.123	60.061	N/A	N/A	43.063	PK
2		5350.000	54.368	55.241	-19.632	74.000	-0.873	PK
3	*	5359.935	55.721	58.788	-18.279	74.000	-3.067	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

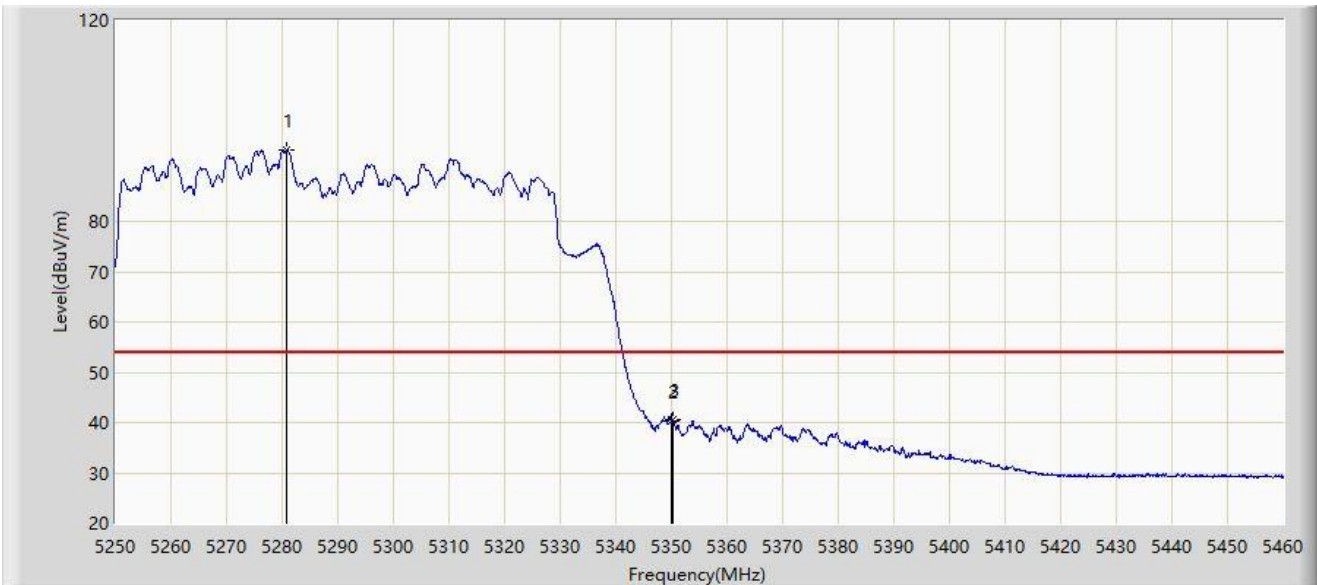


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5280.870	94.124	46.900	N/A	N/A	47.224	AV
2		5350.000	40.272	41.145	-13.728	54.000	-0.873	AV
3	*	5350.170	40.445	41.410	-13.555	54.000	-0.965	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

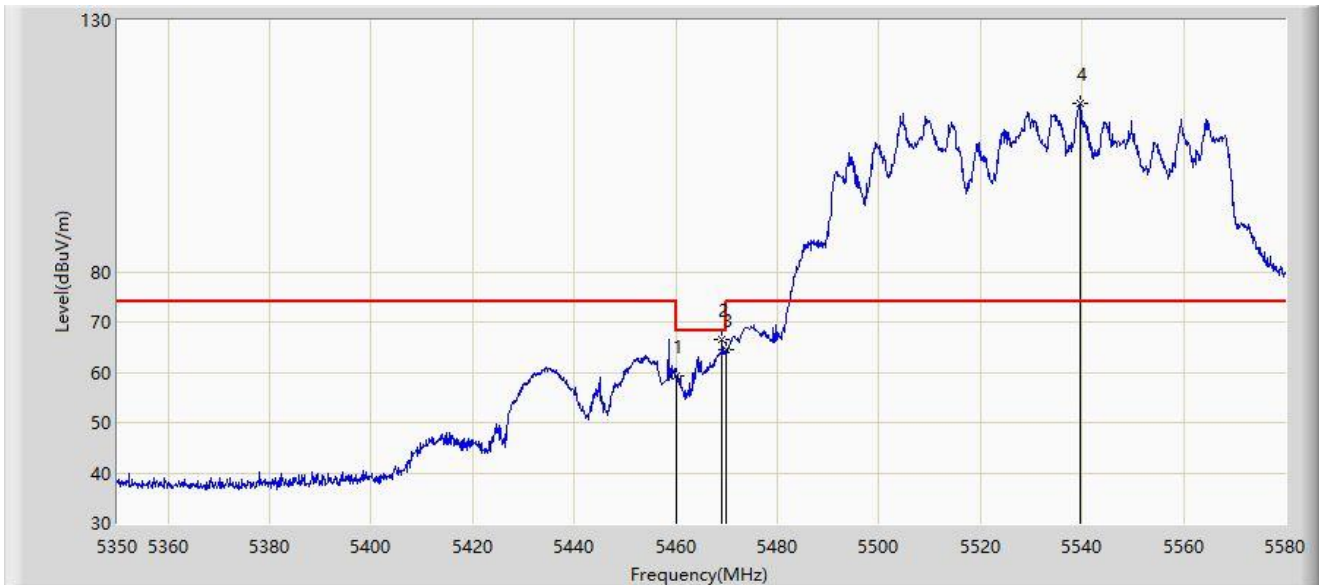


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5460.000	59.198	61.499	-9.002	68.200	-2.301	PK
2	*	5469.140	66.570	67.305	-1.630	68.200	-0.734	PK
3		5470.000	64.409	64.999	-3.791	68.200	-0.591	PK
4		5539.635	113.438	73.620	N/A	N/A	39.818	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

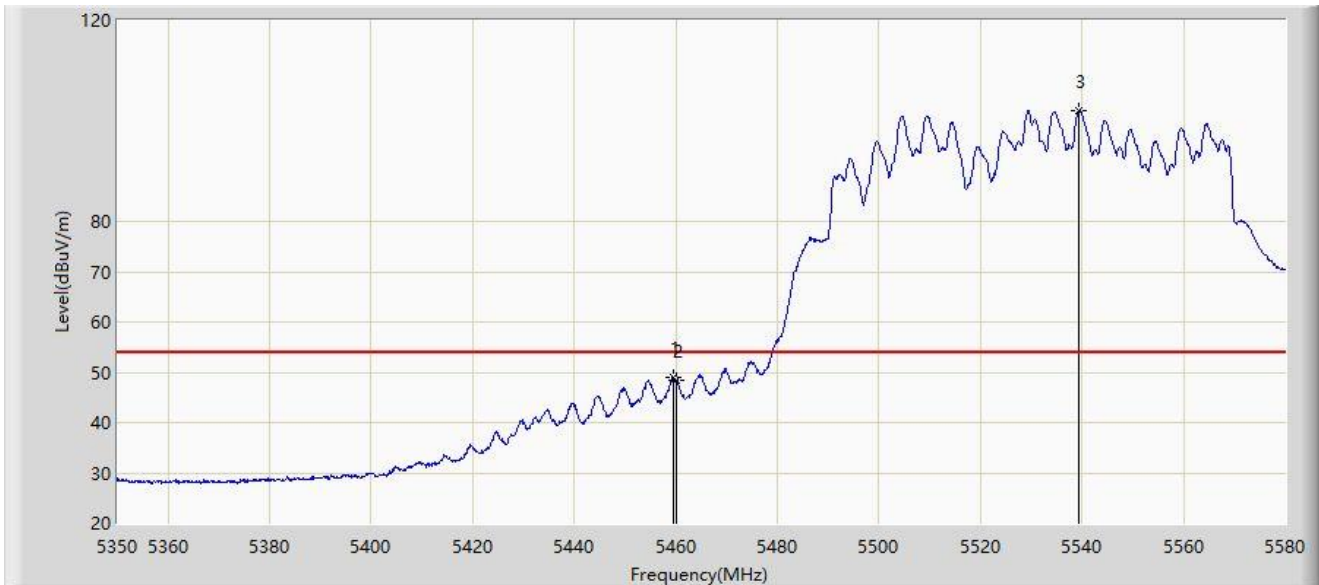


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5459.480	49.059	51.409	-4.941	54.000	-2.349	AV
2		5460.000	48.503	50.804	-5.497	54.000	-2.301	AV
3		5539.290	102.164	62.170	N/A	N/A	39.994	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

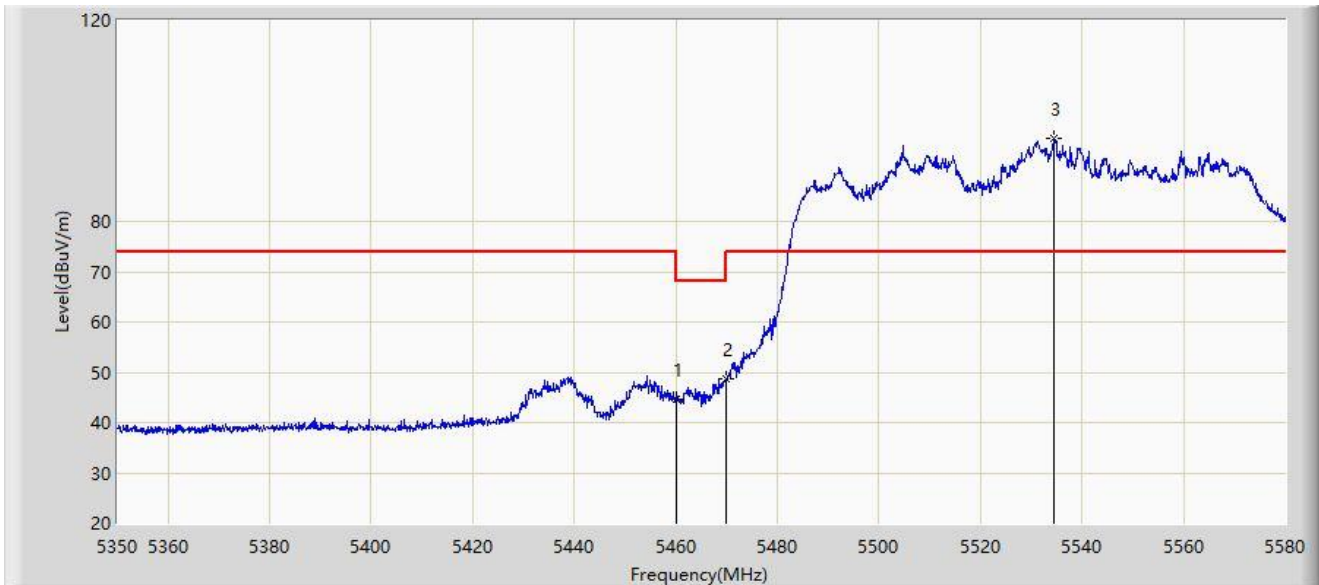


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5460.000	44.716	47.017	-23.484	68.200	-2.301	PK
2	*	5470.000	48.600	49.190	-19.600	68.200	-0.591	PK
3		5534.460	96.526	52.218	N/A	N/A	44.307	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

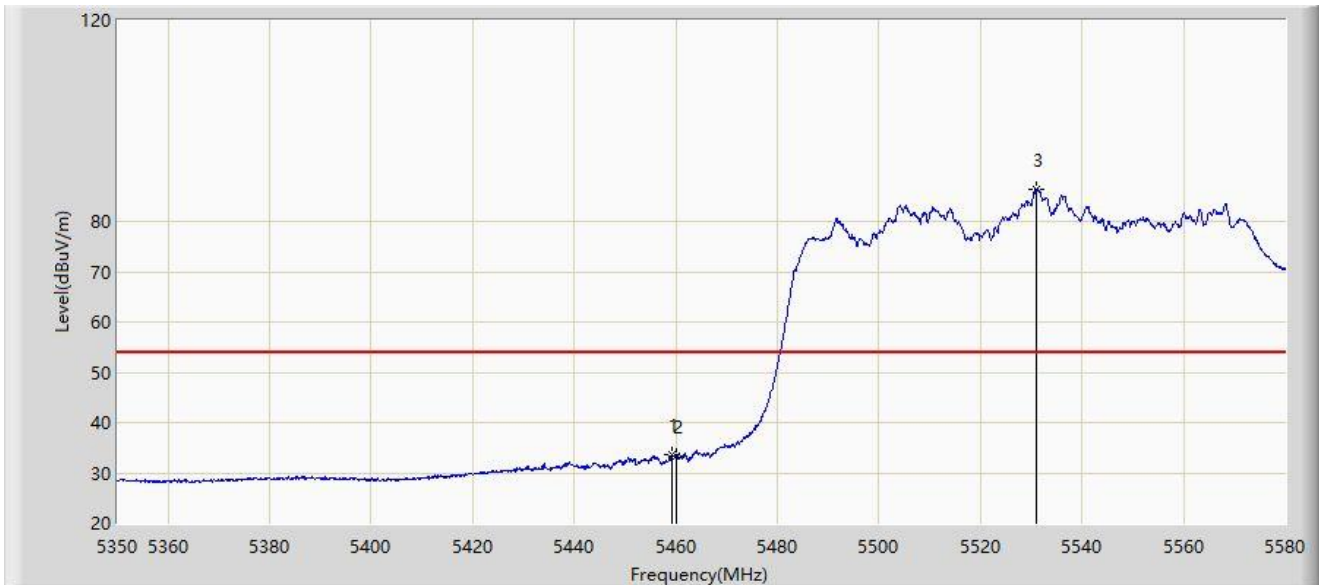


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5459.250	33.693	36.069	-20.307	54.000	-2.375	AV
2		5460.000	33.268	35.569	-20.732	54.000	-2.301	AV
3		5531.125	86.368	37.428	N/A	N/A	48.939	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

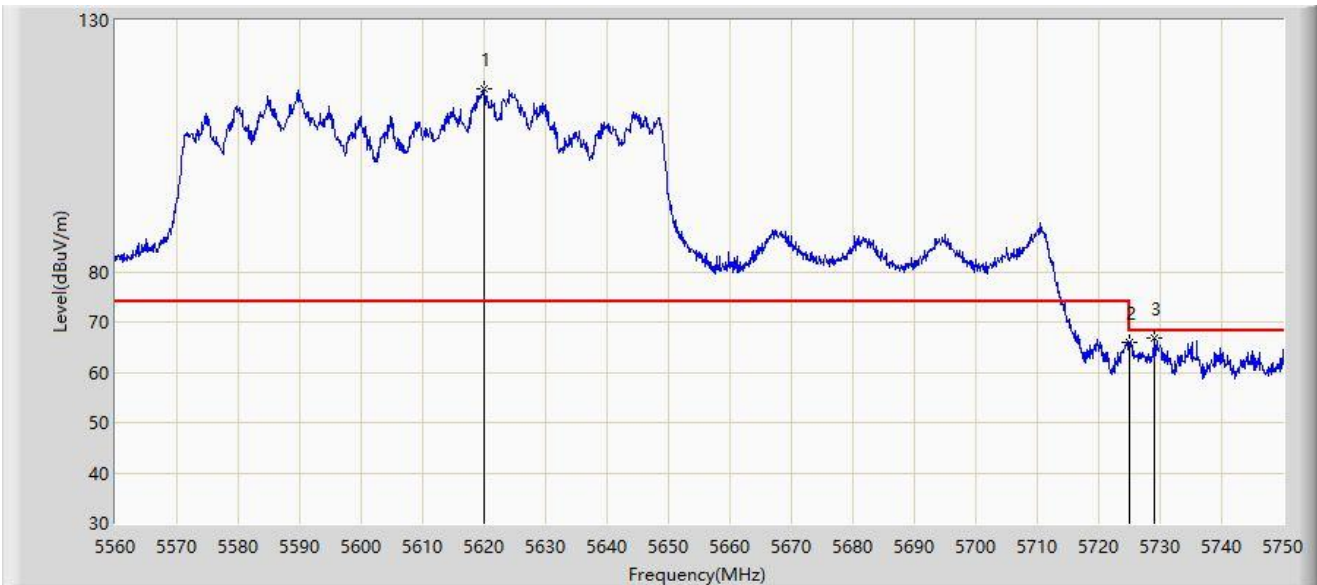


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5620.040	116.406	76.207	N/A	N/A	40.198	PK
2		5725.000	65.805	64.577	-2.395	68.200	1.227	PK
3	*	5729.005	66.751	67.110	-1.449	68.200	-0.359	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

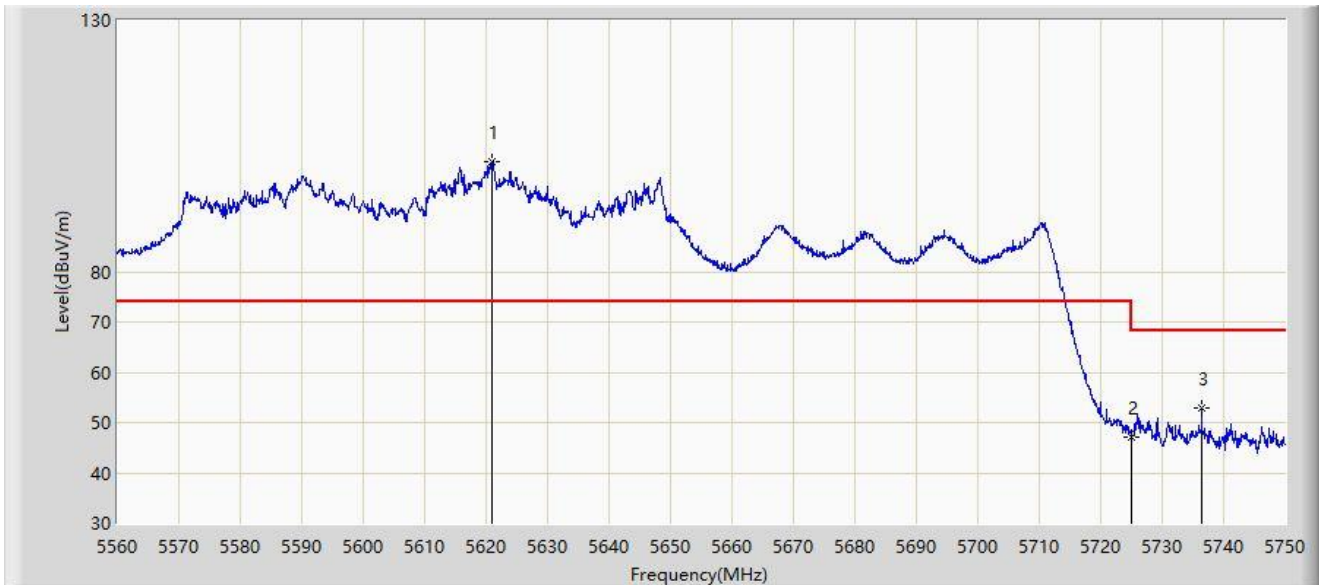


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5620.990	101.993	62.178	N/A	N/A	39.815	PK
2		5725.000	47.164	45.936	-21.036	68.200	1.227	PK
3	*	5736.415	52.896	54.478	-15.304	68.200	-1.581	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-04
Limit: FCC_5.8G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

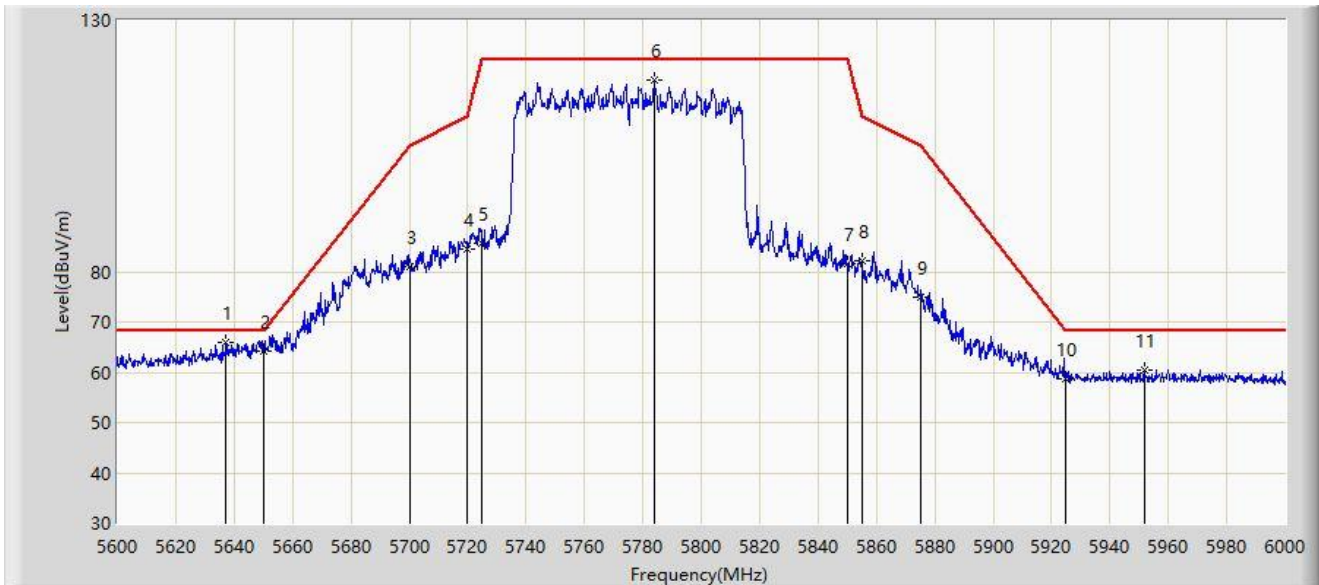


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5637.200	65.989	72.012	-2.211	68.200	-6.022	PK
2		5650.000	64.319	70.306	-3.881	68.200	-5.988	PK
3		5700.000	80.894	86.499	-24.306	105.200	-5.605	PK
4		5720.000	84.637	90.185	-26.163	110.800	-5.549	PK
5		5725.000	85.739	91.211	-36.461	122.200	-5.473	PK
6		5783.800	118.145	123.984	N/A	N/A	-5.839	PK
7		5850.000	81.569	86.921	-40.631	122.200	-5.352	PK
8		5855.000	82.303	87.685	-28.497	110.800	-5.382	PK
9		5875.000	74.899	79.925	-30.301	105.200	-5.026	PK
10		5925.000	58.810	64.353	-9.390	68.200	-5.543	PK
11		5951.800	60.413	65.811	-7.787	68.200	-5.399	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-04
Limit: FCC_5.8G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

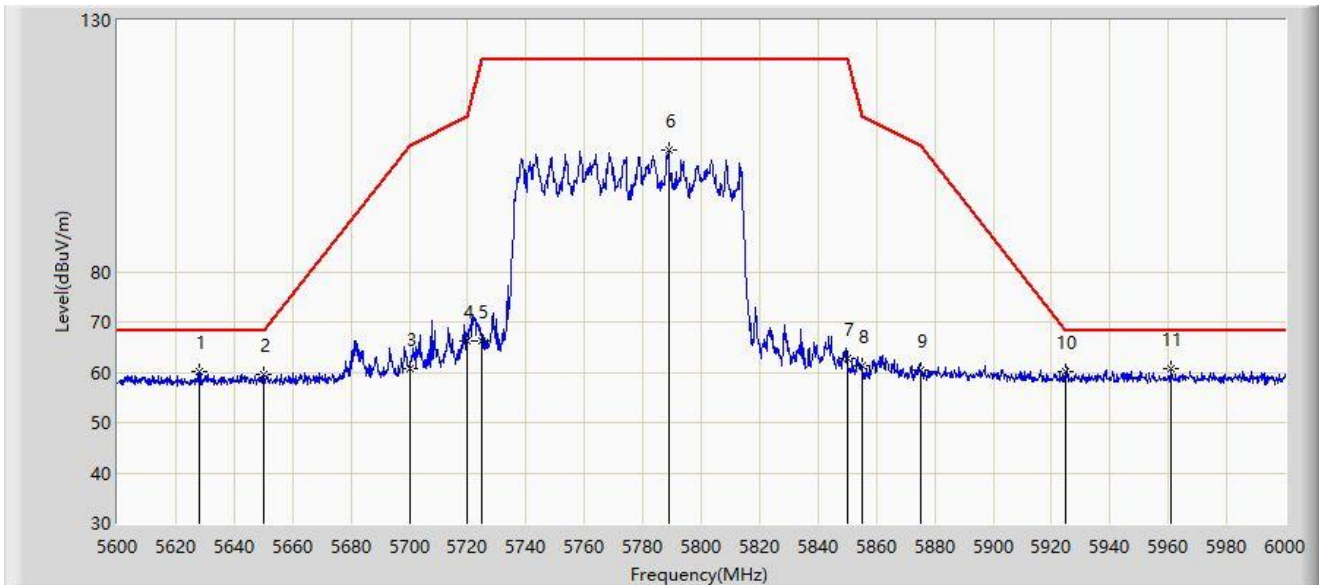


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5628.000	60.059	66.181	-8.141	68.200	-6.122	PK
2		5650.000	59.504	65.491	-8.696	68.200	-5.988	PK
3		5700.000	60.737	66.342	-44.463	105.200	-5.605	PK
4		5720.000	66.262	71.810	-44.538	110.800	-5.549	PK
5		5725.000	66.234	71.706	-55.966	122.200	-5.473	PK
6		5788.800	104.172	110.069	N/A	N/A	-5.897	PK
7		5850.000	62.855	68.207	-59.345	122.200	-5.352	PK
8		5855.000	61.248	66.630	-49.552	110.800	-5.382	PK
9		5875.000	60.320	65.346	-44.880	105.200	-5.026	PK
10		5925.000	60.046	65.589	-8.154	68.200	-5.543	PK
11	*	5960.800	60.690	66.038	-7.510	68.200	-5.348	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250MHz	

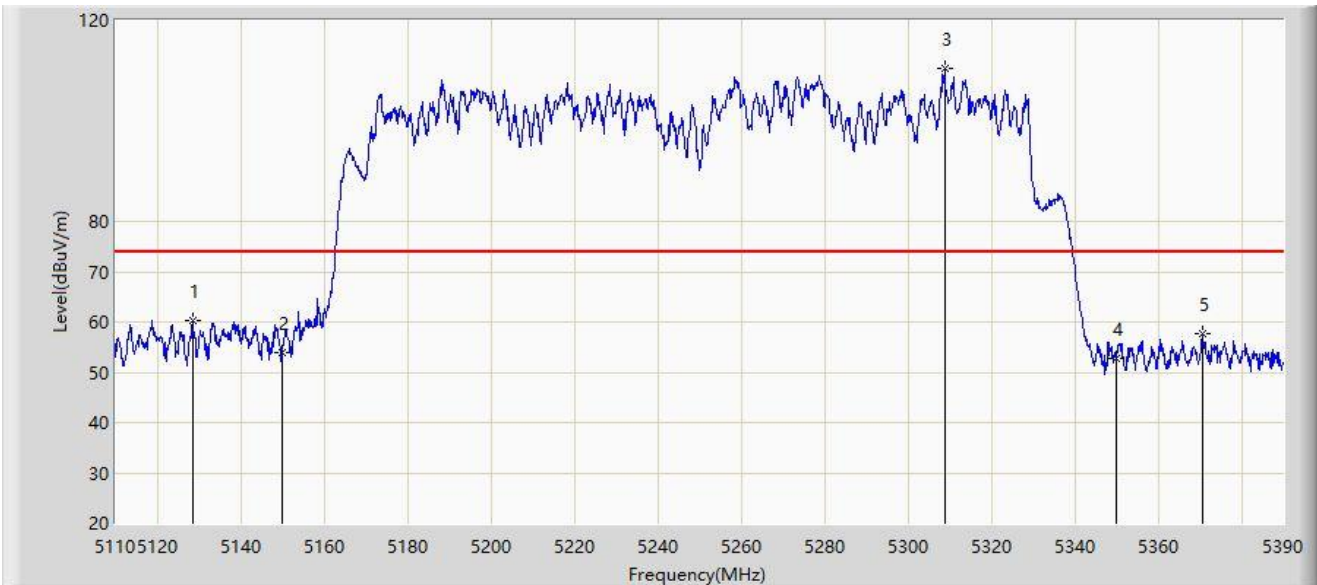


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5128.480	60.392	64.480	-13.608	74.000	-4.088	PK
2		5150.000	53.799	55.523	-20.201	74.000	-1.724	PK
3		5308.800	110.555	70.048	N/A	N/A	40.508	PK
4		5350.000	52.826	53.699	-21.174	74.000	-0.873	PK
5		5370.680	57.760	61.806	-16.240	74.000	-4.045	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250MHz	

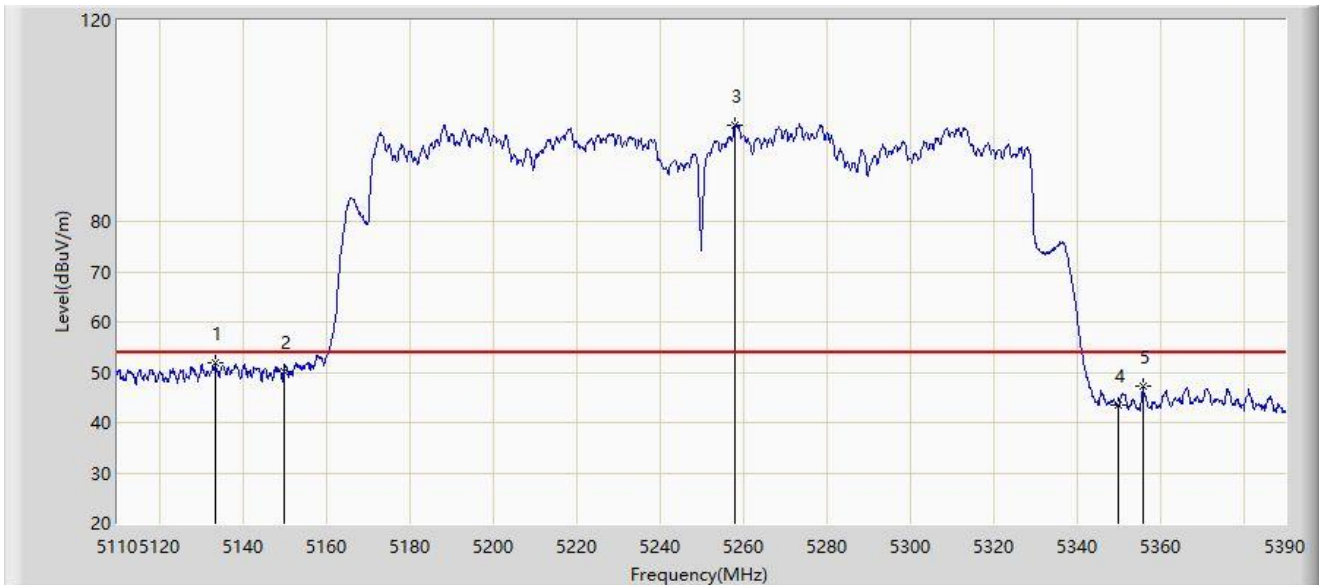


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5133.520	51.890	55.752	-2.110	54.000	-3.862	AV
2		5150.000	50.113	51.837	-3.887	54.000	-1.724	AV
3		5258.120	99.074	55.804	N/A	N/A	43.270	AV
4		5350.000	43.417	44.290	-10.583	54.000	-0.873	AV
5		5355.840	47.132	49.612	-6.868	54.000	-2.480	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250MHz	

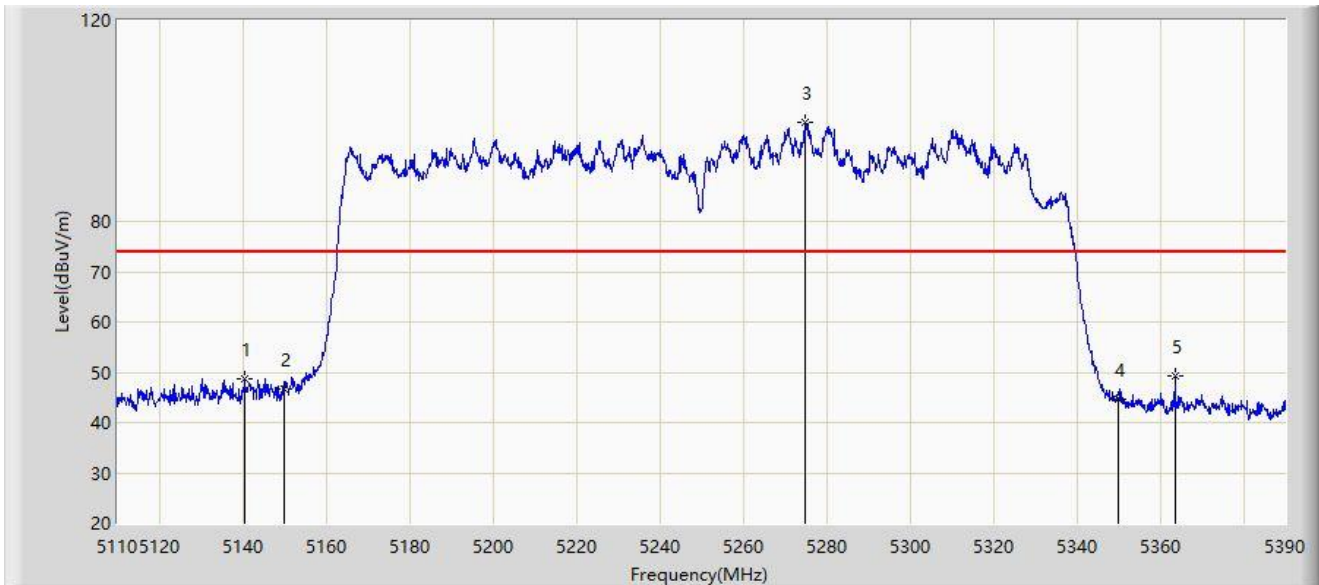


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5140.520	48.764	51.754	-25.236	74.000	-2.990	PK
2		5150.000	46.763	48.487	-27.237	74.000	-1.724	PK
3		5275.060	99.763	58.772	N/A	N/A	40.991	PK
4		5350.000	44.752	45.625	-29.248	74.000	-0.873	PK
5	*	5363.540	49.256	52.714	-24.744	74.000	-3.458	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5250MHz	

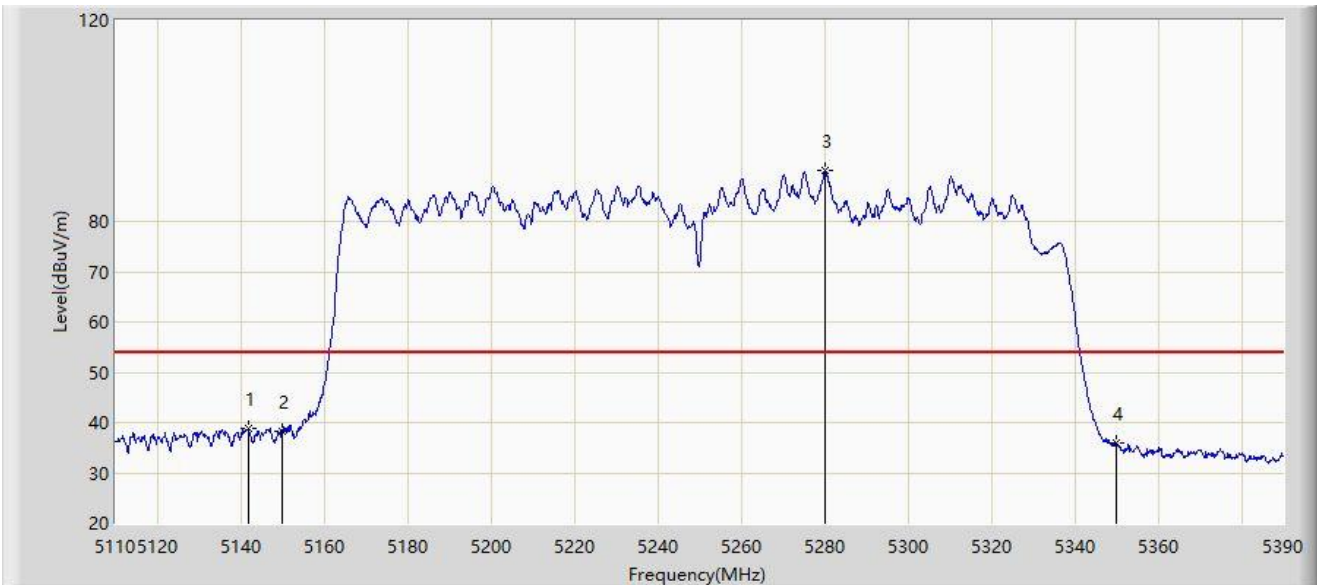


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5141.920	38.903	41.699	-15.097	54.000	-2.796	AV
2		5150.000	38.269	39.993	-15.731	54.000	-1.724	AV
3		5280.240	90.059	43.486	N/A	N/A	46.574	AV
4		5350.000	35.998	36.871	-18.002	54.000	-0.873	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570MHz	

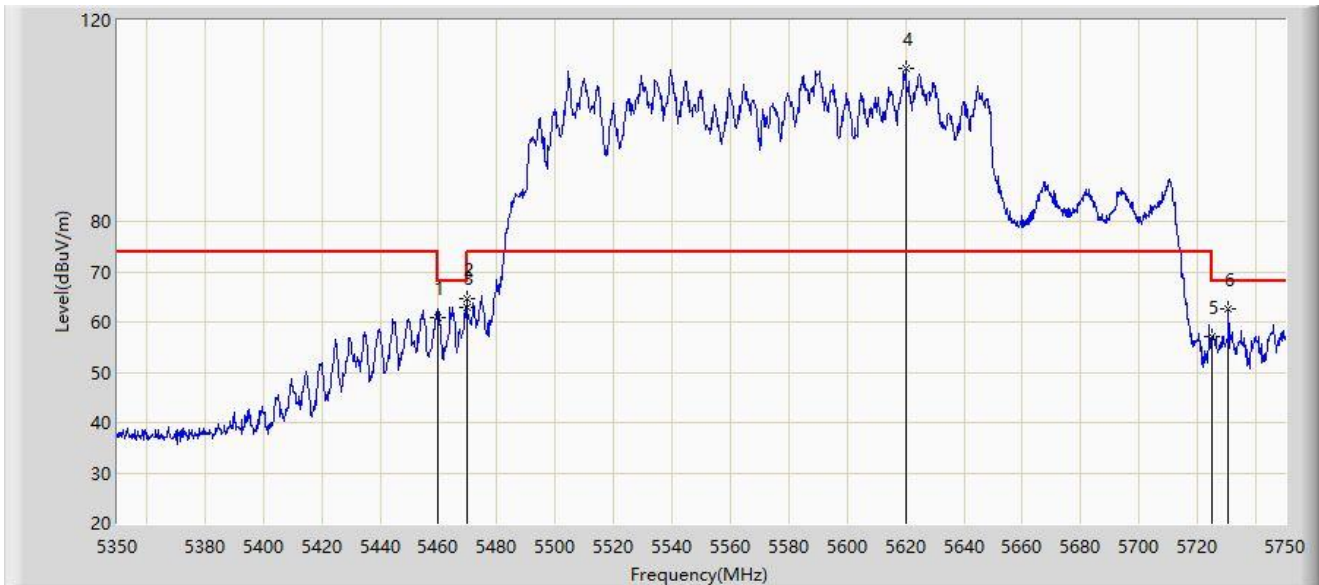


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5460.000	60.859	63.160	-7.341	68.200	-2.301	PK
2	*	5469.600	64.536	65.194	-3.664	68.200	-0.659	PK
3		5470.000	62.769	63.359	-5.431	68.200	-0.591	PK
4		5620.000	110.412	70.195	N/A	N/A	40.217	PK
5		5725.000	57.171	55.943	-11.029	68.200	1.227	PK
6		5730.600	62.659	63.413	-5.541	68.200	-0.754	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570MHz	

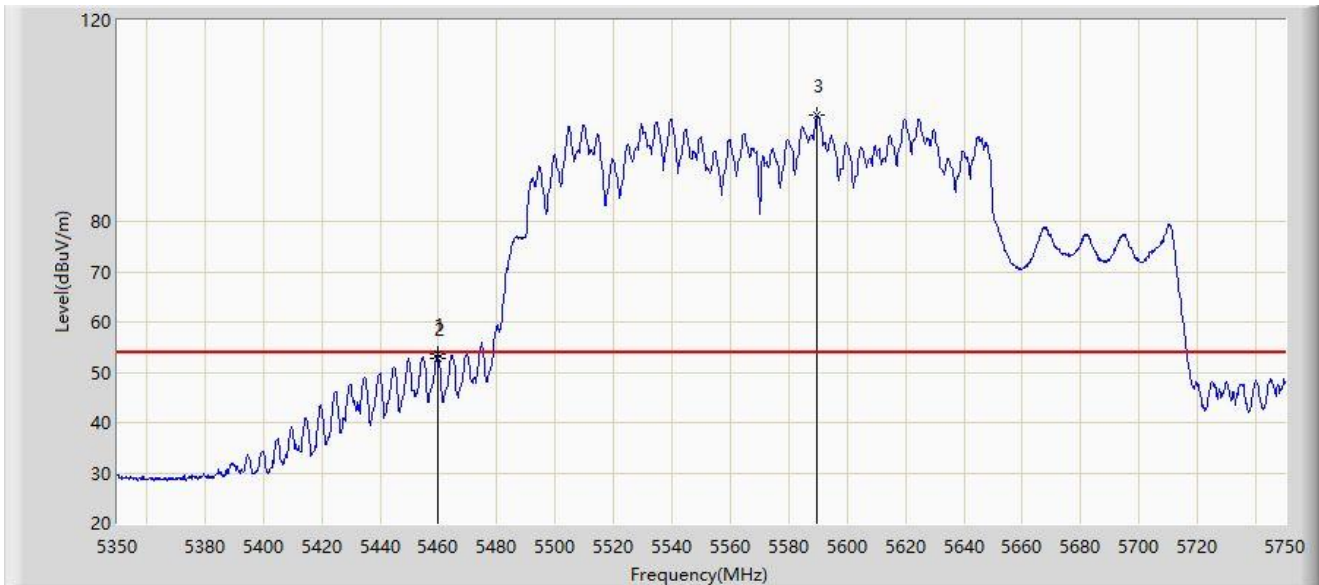


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5459.600	53.490	55.826	-0.510	54.000	-2.336	AV
2		5460.000	52.725	55.026	-1.275	54.000	-2.301	AV
3		5589.600	101.108	55.065	N/A	N/A	46.043	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570MHz	

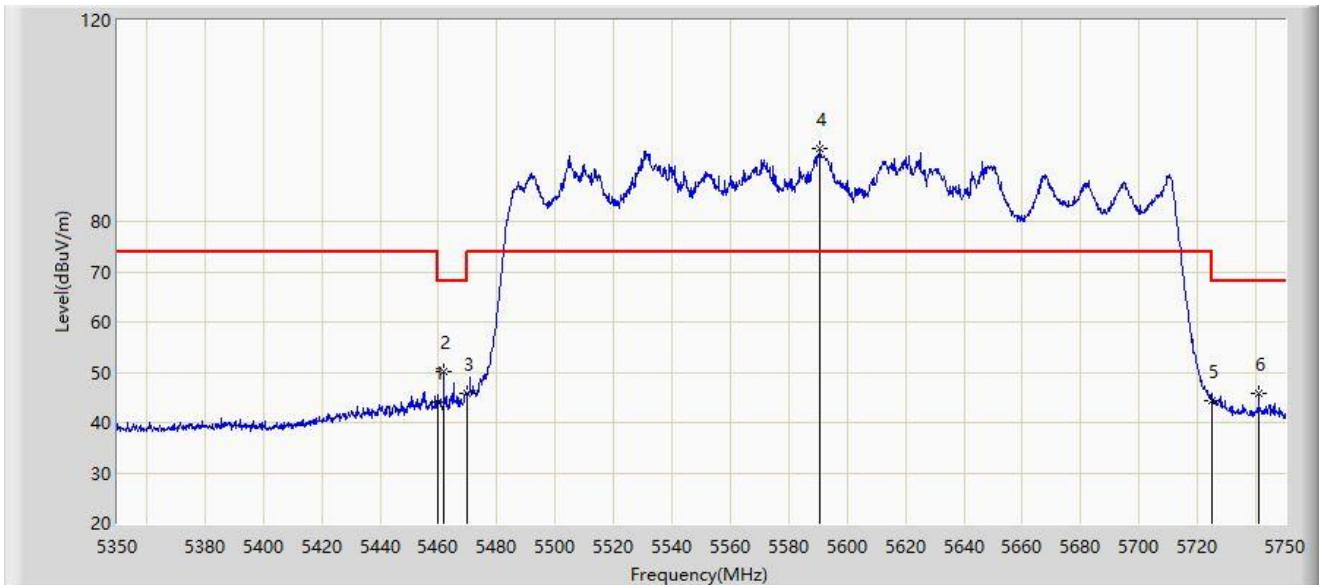


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5460.000	43.941	46.242	-24.259	68.200	-2.301	PK
2	*	5461.800	50.024	52.156	-18.176	68.200	-2.132	PK
3		5470.000	45.741	46.331	-22.459	68.200	-0.591	PK
4		5590.800	94.356	46.649	N/A	N/A	47.707	PK
5		5725.000	44.444	43.216	-23.756	68.200	1.227	PK
6		5741.000	45.797	47.726	-22.403	68.200	-1.929	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 5570MHz	

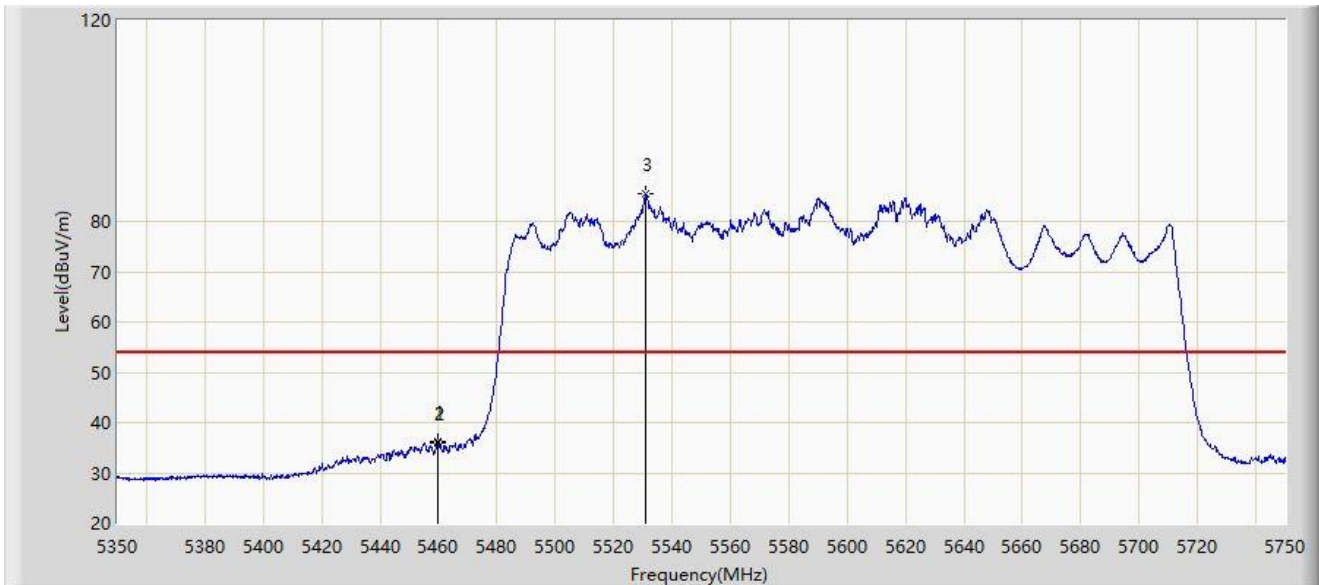


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5459.800	36.093	38.412	-17.907	54.000	-2.318	AV
2		5460.000	35.862	38.163	-18.138	54.000	-2.301	AV
3		5531.200	85.413	36.413	N/A	N/A	48.999	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5180MHz	

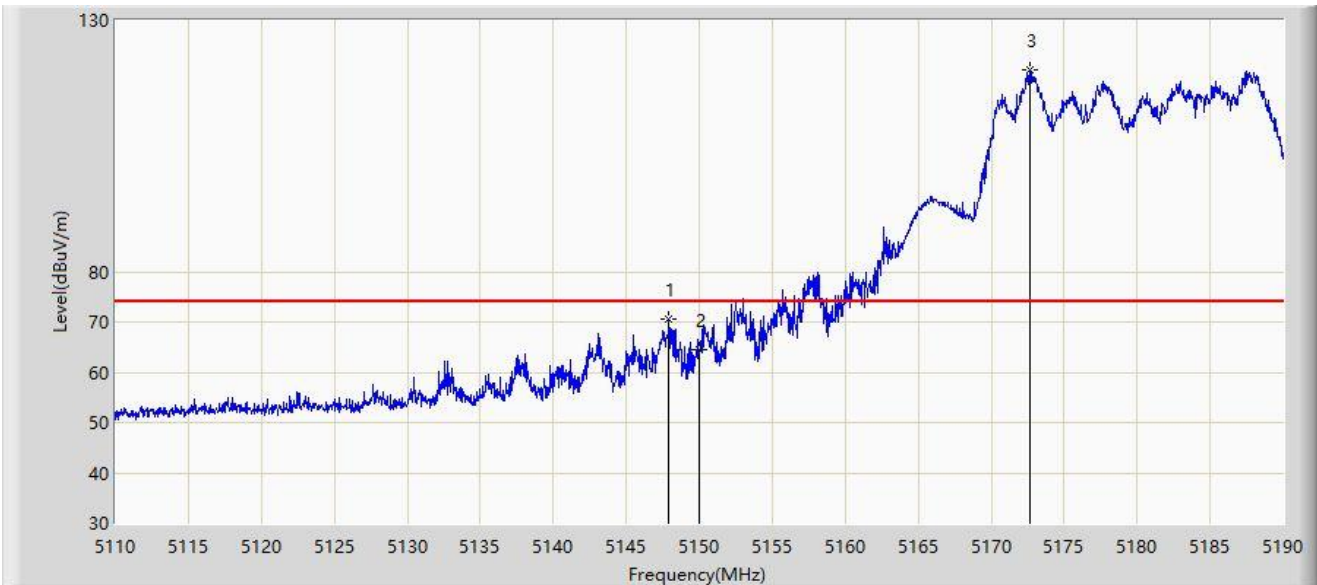


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5147.920	70.532	72.618	-3.468	74.000	-2.086	PK
2		5150.000	64.605	66.329	-9.395	74.000	-1.724	PK
3		5172.680	120.098	73.067	N/A	N/A	47.032	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5180MHz	

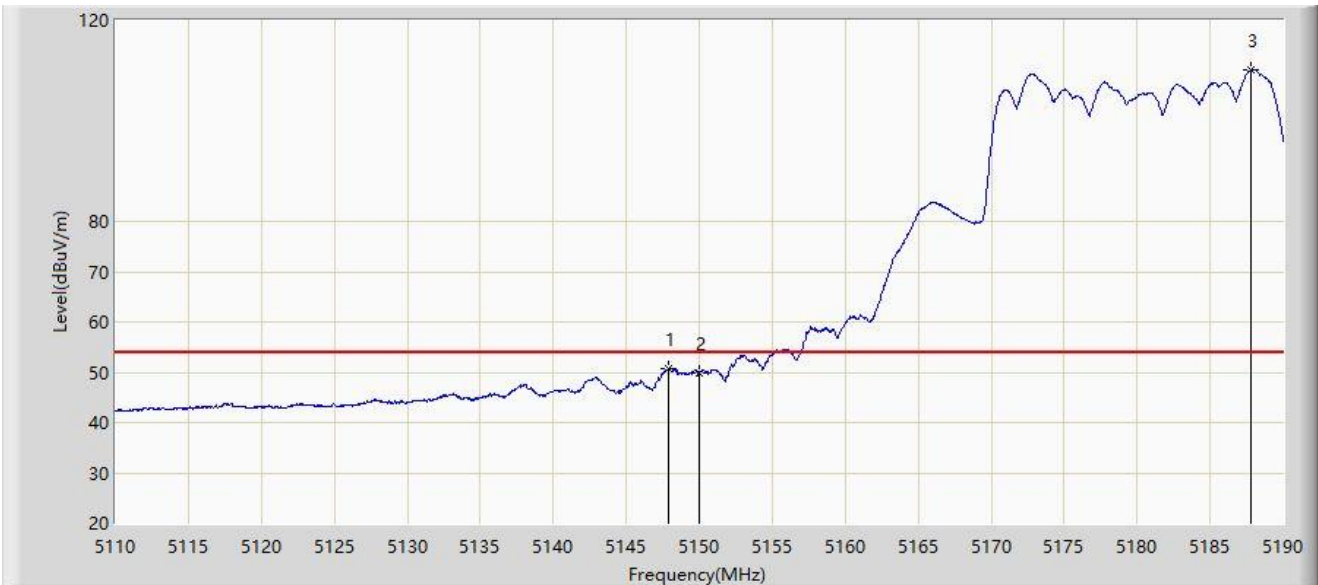


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.920	50.828	52.914	-3.172	54.000	-2.086	AV
2		5150.000	49.715	51.439	-4.285	54.000	-1.724	AV
3		5187.840	110.005	71.752	N/A	N/A	38.253	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5180MHz	

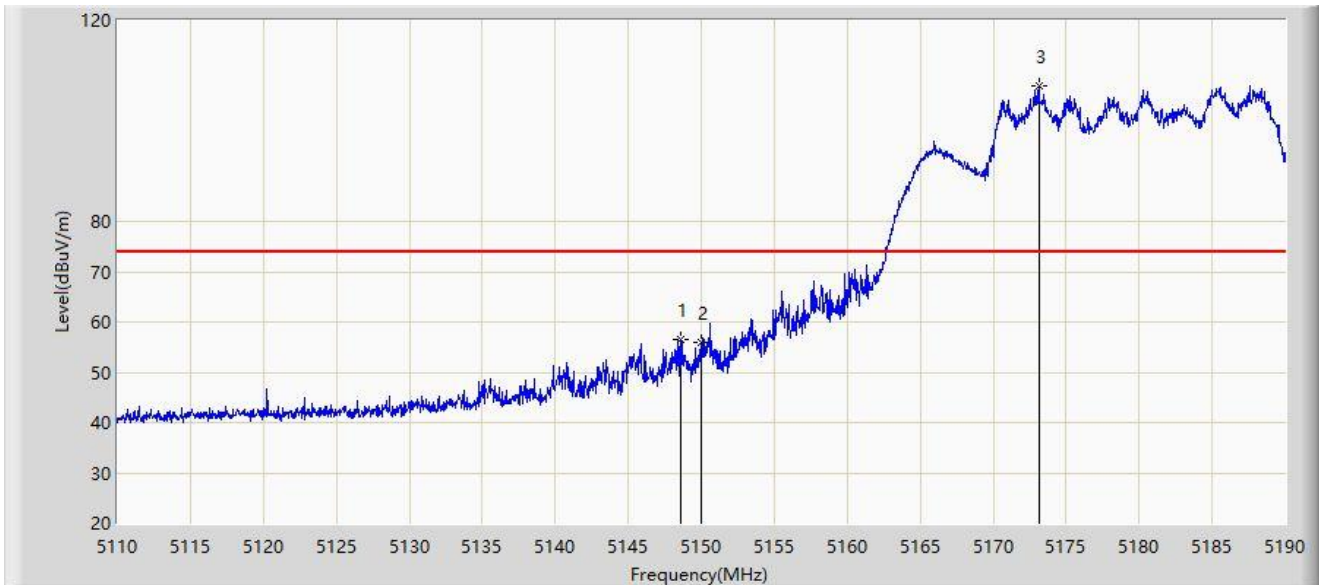

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.560	56.431	58.417	-17.569	74.000	-1.986	PK
2		5150.000	55.992	57.716	-18.008	74.000	-1.724	PK
3		5173.120	106.961	59.459	N/A	N/A	47.502	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-28
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5180MHz	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5150.000	40.364	42.088	-13.636	54.000	-1.724	AV
2		5185.480	97.678	61.393	N/A	N/A	36.285	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-29
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: HF907_102862_1-18GHz-AC1	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5320MHz	

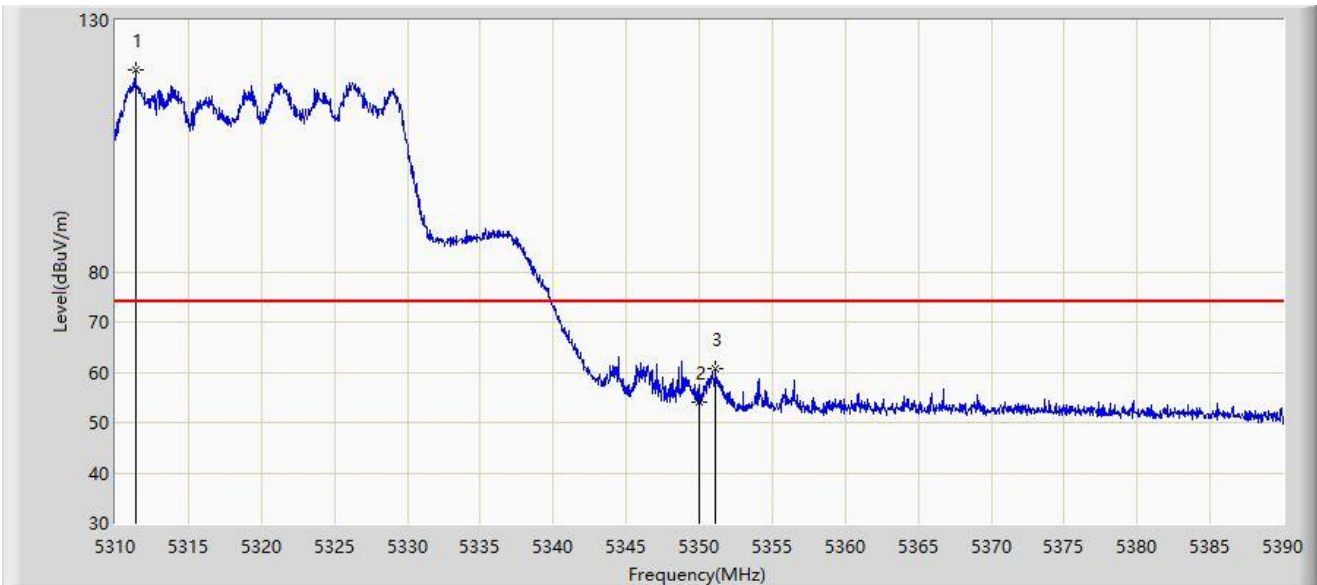


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5311.360	120.268	72.763	N/A	N/A	47.506	PK
2		5350.000	54.164	52.133	-19.836	74.000	2.031	PK
3	*	5351.120	60.656	59.120	-13.344	74.000	1.536	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-29
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: HF907_102862_1-18GHz-AC1	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5320MHz	

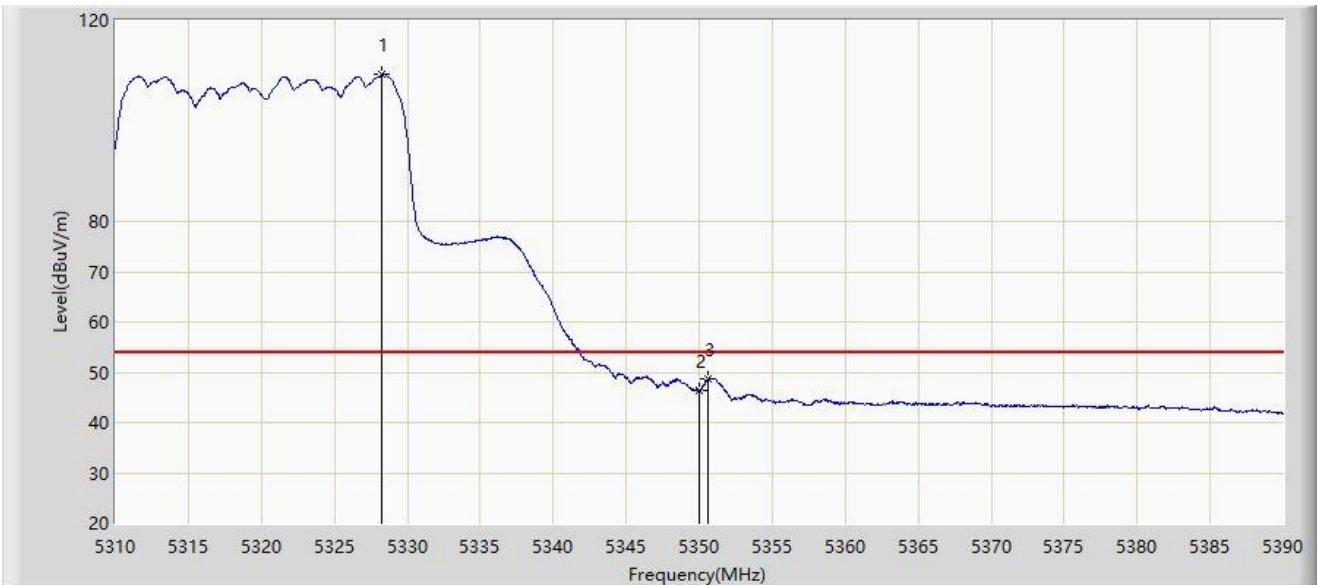


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5328.240	109.160	64.069	N/A	N/A	45.092	AV
2		5350.000	46.298	44.267	-7.702	54.000	2.031	AV
3	*	5350.640	48.783	47.073	-5.217	54.000	1.711	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-29
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: HF907_102862_1-18GHz-AC1	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5320MHz	

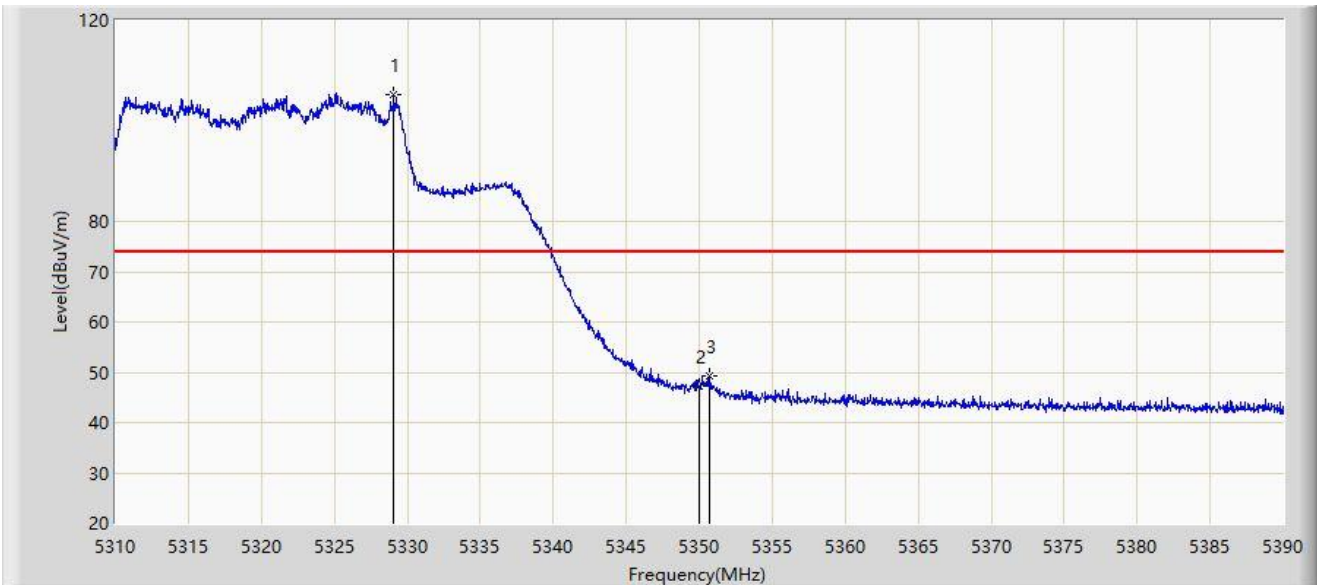


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5329.040	105.286	59.883	N/A	N/A	45.403	PK
2		5350.000	47.169	45.138	-26.831	74.000	2.031	PK
3	*	5350.720	49.185	47.504	-24.815	74.000	1.681	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-29
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: HF907_102862_1-18GHz-AC1	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5320MHz	

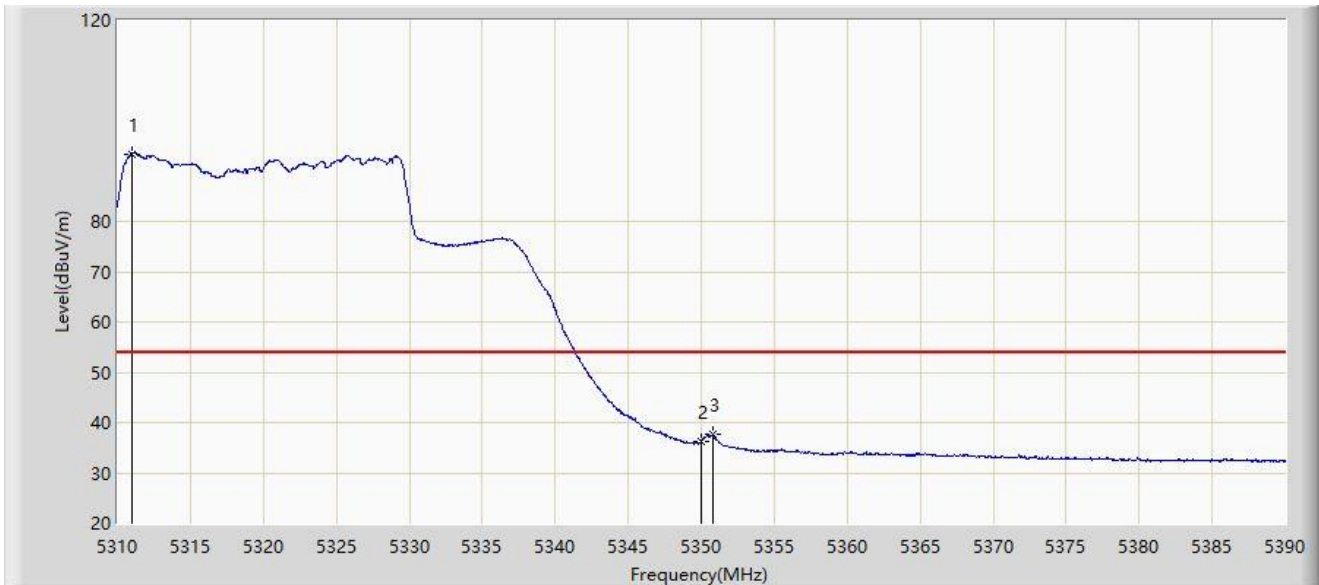


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5310.960	93.456	46.682	N/A	N/A	46.774	AV
2		5350.000	36.248	34.217	-17.752	54.000	2.031	AV
3	*	5350.760	37.597	35.930	-16.403	54.000	1.666	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5500MHz	

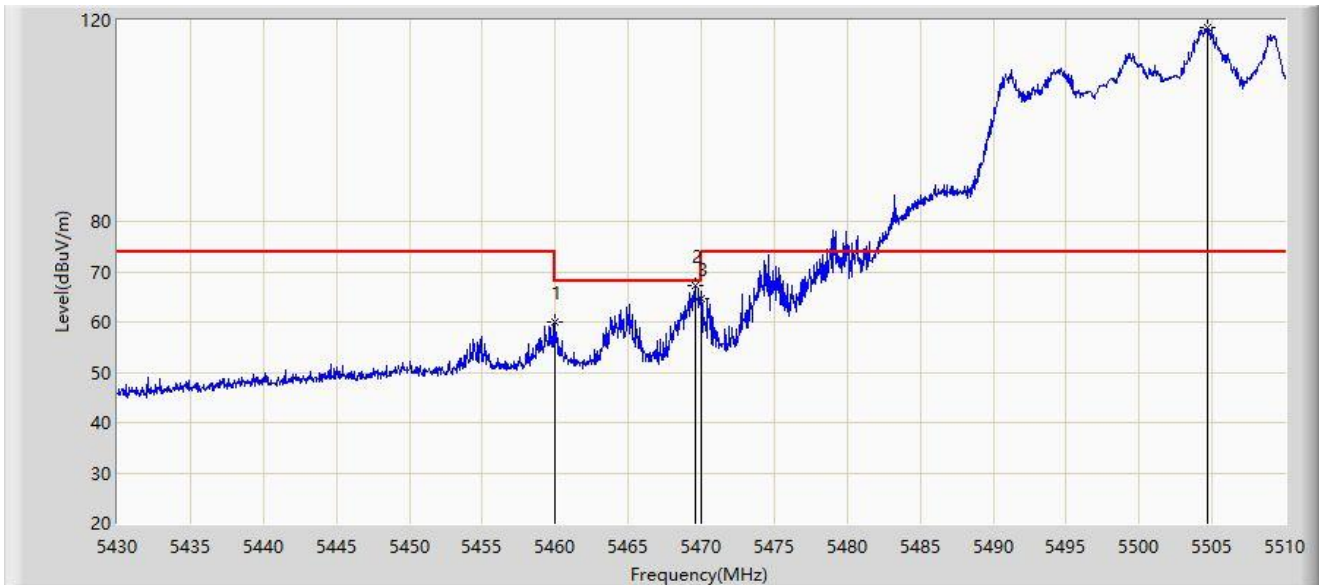


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5460.000	60.108	62.409	-8.092	68.200	-2.301	PK
2	*	5469.560	67.299	67.962	-0.901	68.200	-0.663	PK
3		5470.000	64.525	65.115	-3.675	68.200	-0.591	PK
4		5504.640	118.519	73.111	N/A	N/A	45.407	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5500MHz	

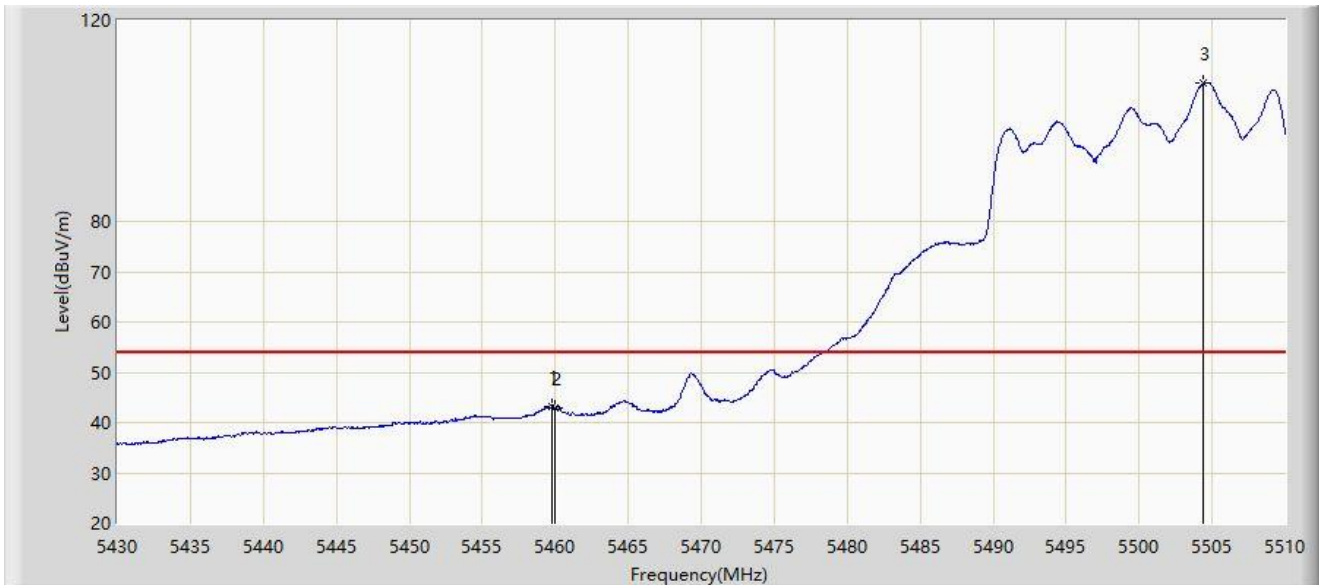


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5459.760	43.176	45.498	-10.824	54.000	-2.321	AV
2		5460.000	42.946	45.247	-11.054	54.000	-2.301	AV
3		5504.400	107.477	62.345	N/A	N/A	45.132	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5500MHz	

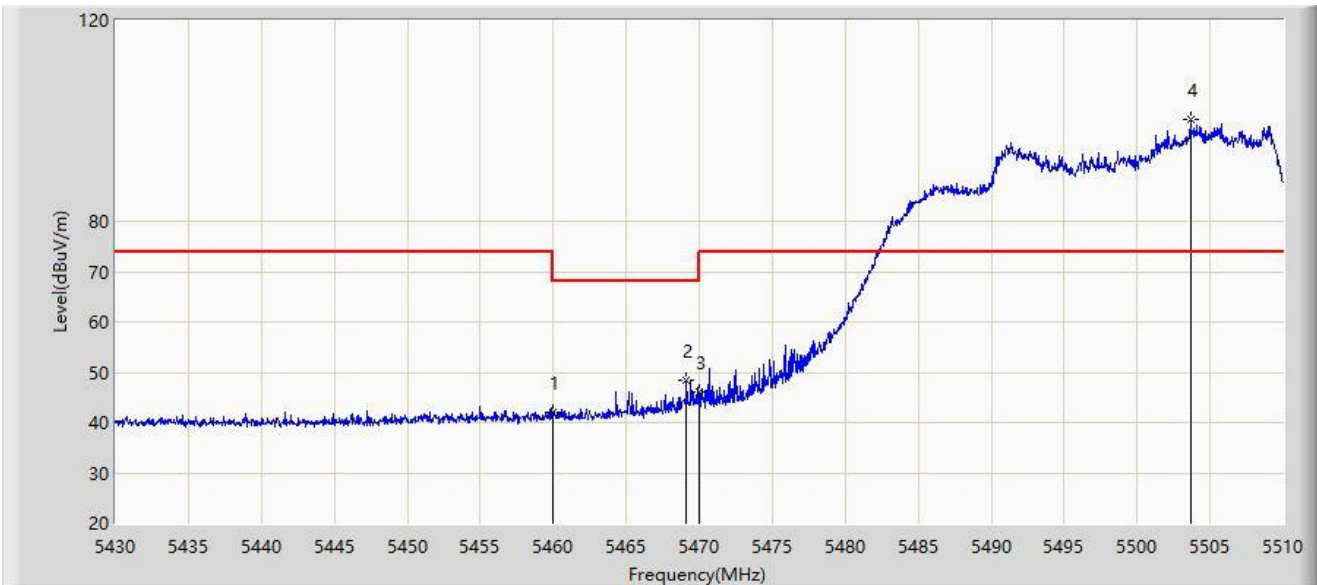


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5460.000	42.010	44.311	-26.190	68.200	-2.301	PK
2	*	5469.120	48.506	49.252	-19.694	68.200	-0.745	PK
3		5470.000	46.033	46.623	-22.167	68.200	-0.591	PK
4		5503.640	100.328	56.421	N/A	N/A	43.908	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5500MHz	

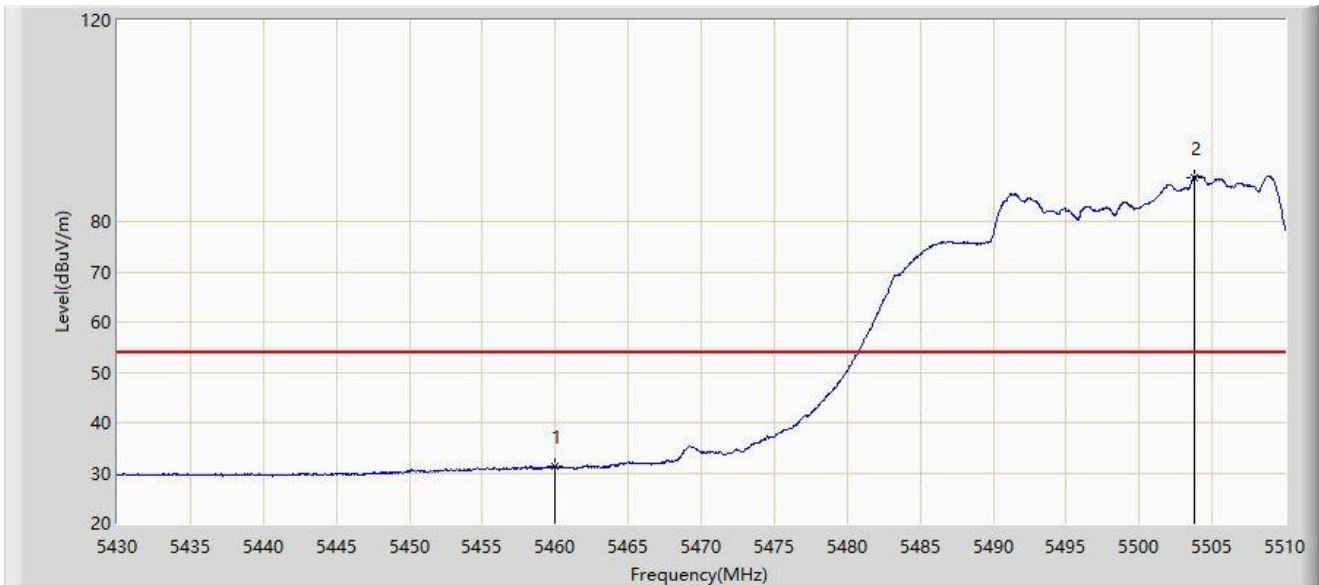


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	31.173	33.474	-22.827	54.000	-2.301	AV
2		5503.760	88.814	44.682	N/A	N/A	44.132	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5700MHz	

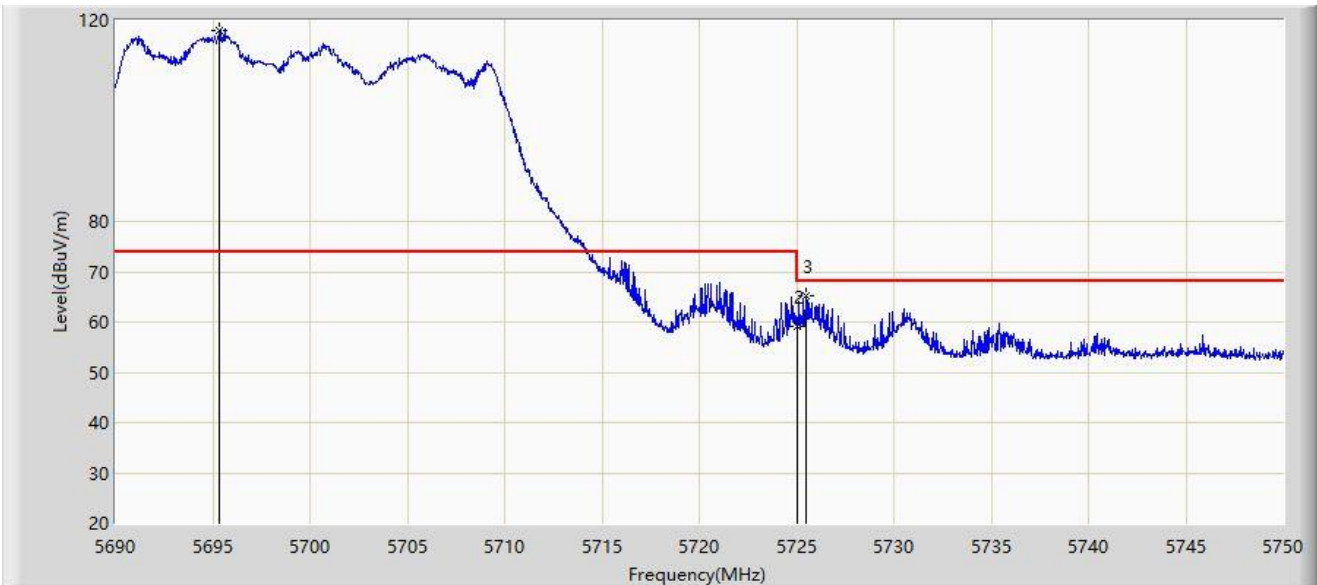


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5695.370	118.055	74.271	N/A	N/A	43.784	PK
2		5725.000	59.191	57.963	-9.009	68.200	1.227	PK
3	*	5725.520	65.235	64.294	-2.965	68.200	0.941	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5700MHz	

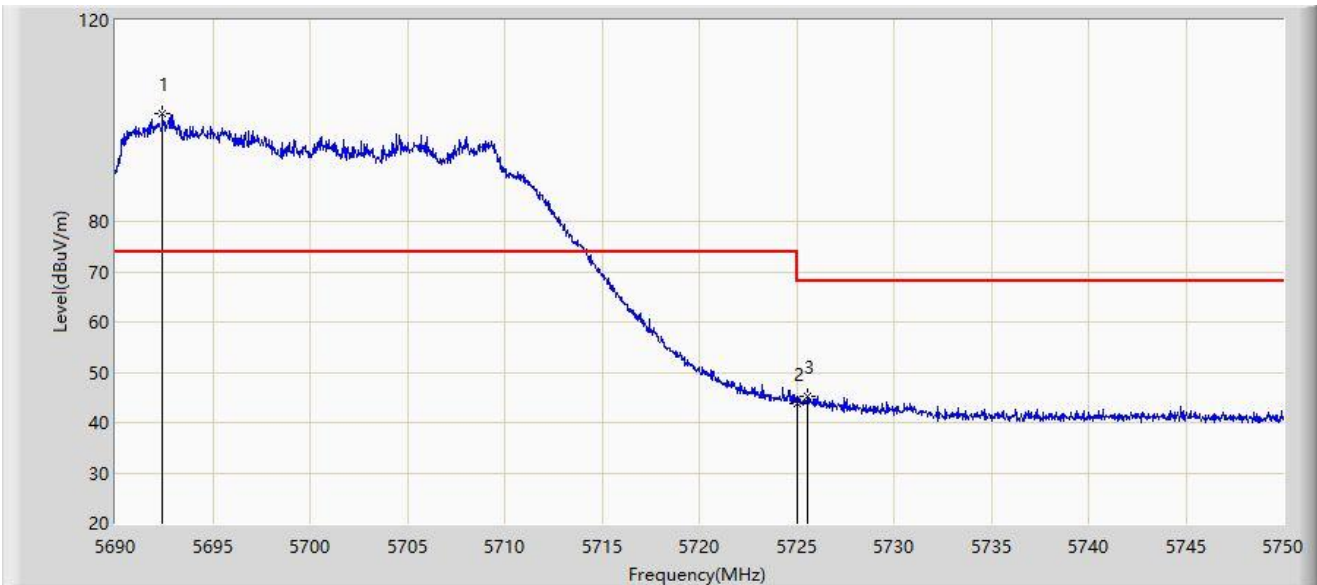


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5692.430	101.524	58.740	N/A	N/A	42.785	PK
2		5725.000	43.895	42.667	-24.305	68.200	1.227	PK
3	*	5725.550	45.152	44.226	-23.048	68.200	0.925	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-04
Limit: FCC_5.8G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5745MHz	

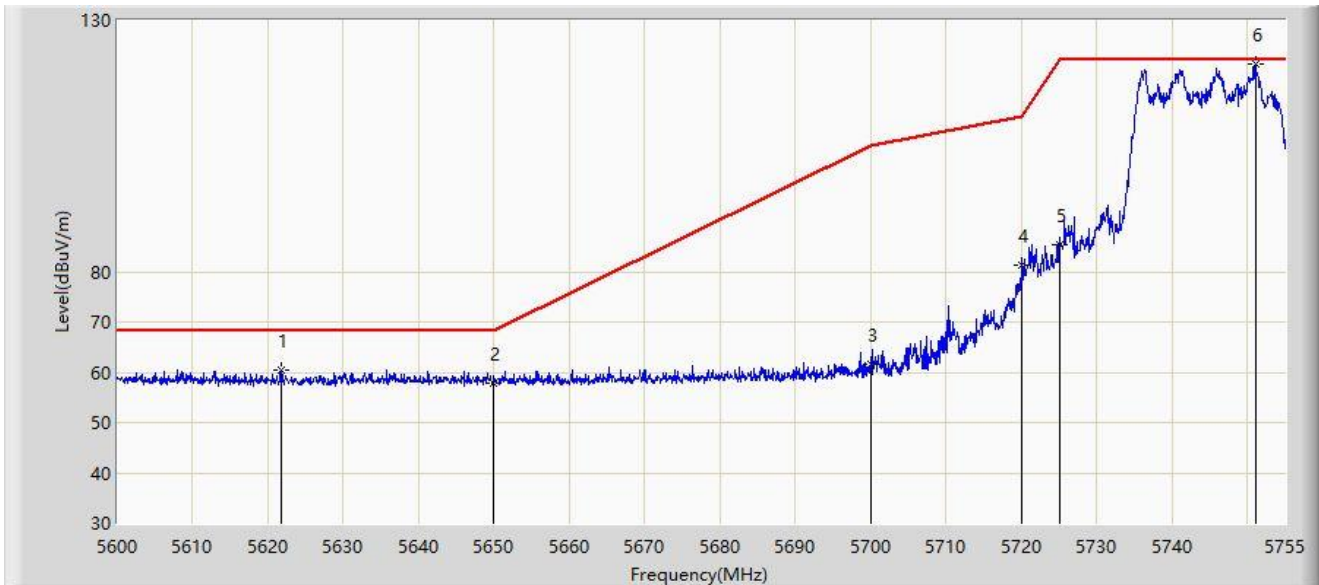


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5621.700	60.374	66.480	-7.826	68.200	-6.107	PK
2		5650.000	57.778	63.765	-10.422	68.200	-5.988	PK
3		5700.000	61.614	67.219	-43.586	105.200	-5.605	PK
4		5720.000	81.448	86.996	-29.352	110.800	-5.549	PK
5		5725.000	85.504	90.976	-36.696	122.200	-5.473	PK
6		5751.125	121.416	127.131	N/A	N/A	-5.715	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-04
Limit: FCC_5.8G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5745MHz	

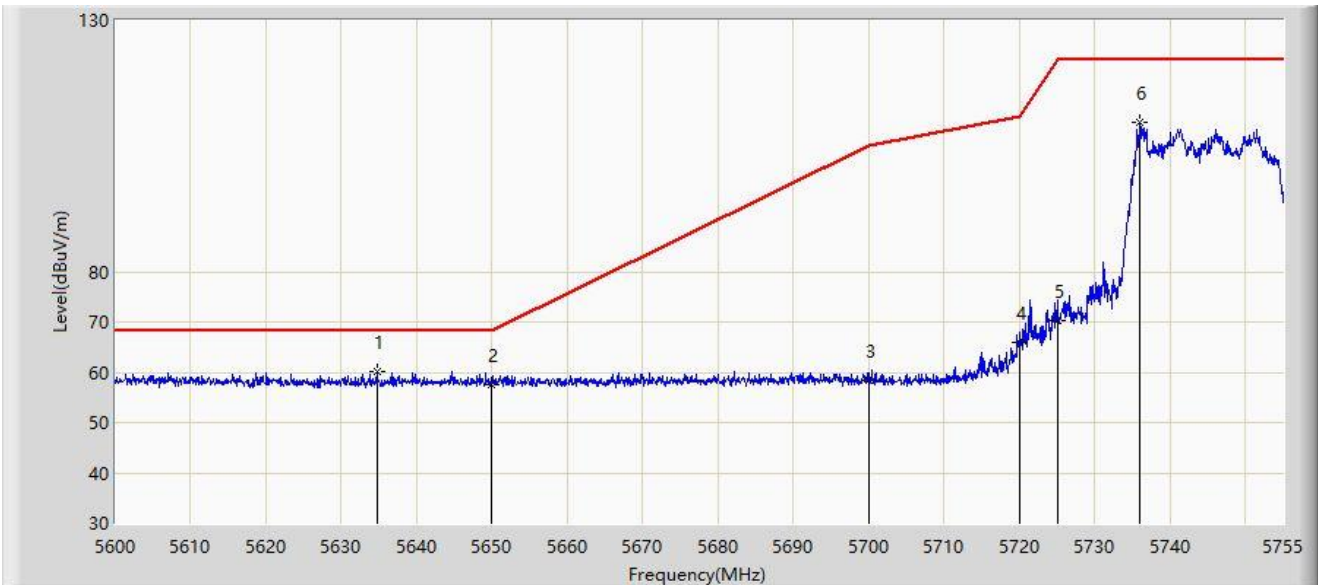


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5634.720	60.118	66.168	-8.082	68.200	-6.049	PK
2		5650.000	57.550	63.537	-10.650	68.200	-5.988	PK
3		5700.000	58.350	63.955	-46.850	105.200	-5.605	PK
4		5720.000	65.851	71.399	-44.949	110.800	-5.549	PK
5		5725.000	70.417	75.889	-51.783	122.200	-5.473	PK
6		5736.013	109.670	115.151	N/A	N/A	-5.480	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-04
Limit: FCC_5.8G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5825MHz	

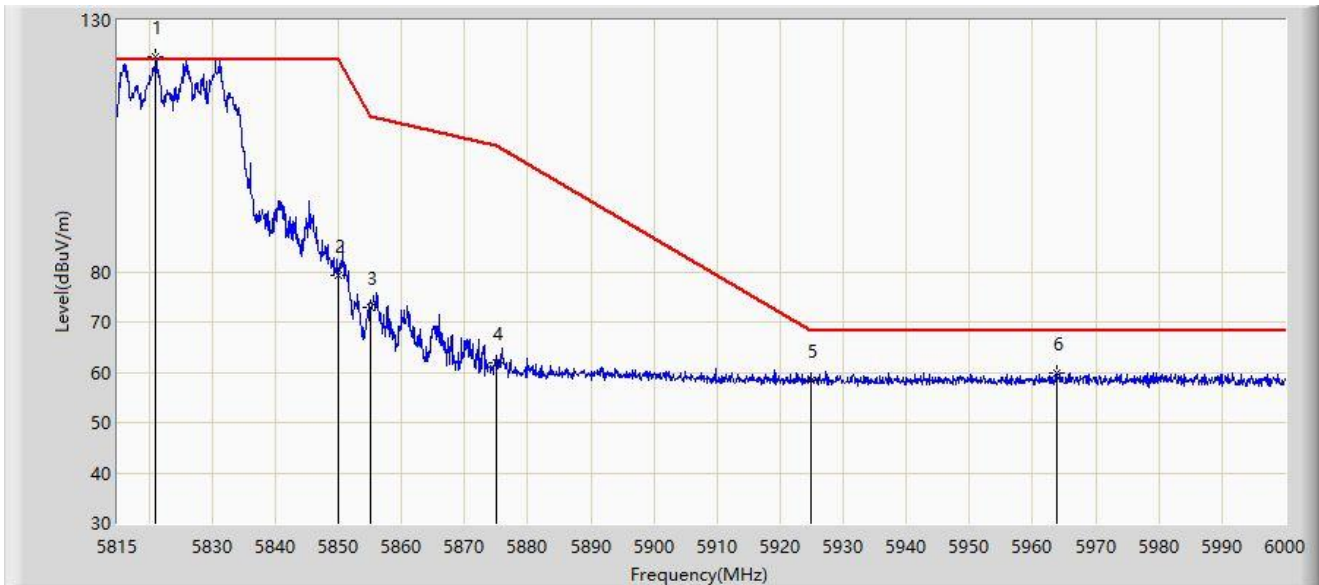


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5821.105	122.616	128.188	N/A	N/A	-5.572	PK
2		5850.000	79.153	84.505	-43.047	122.200	-5.352	PK
3		5855.000	72.838	78.220	-37.962	110.800	-5.382	PK
4		5875.000	61.794	66.820	-43.406	105.200	-5.026	PK
5		5925.000	58.432	63.975	-9.768	68.200	-5.543	PK
6	*	5963.740	59.848	65.180	-8.352	68.200	-5.331	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-04
Limit: FCC_5.8G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT20 at 5825MHz	

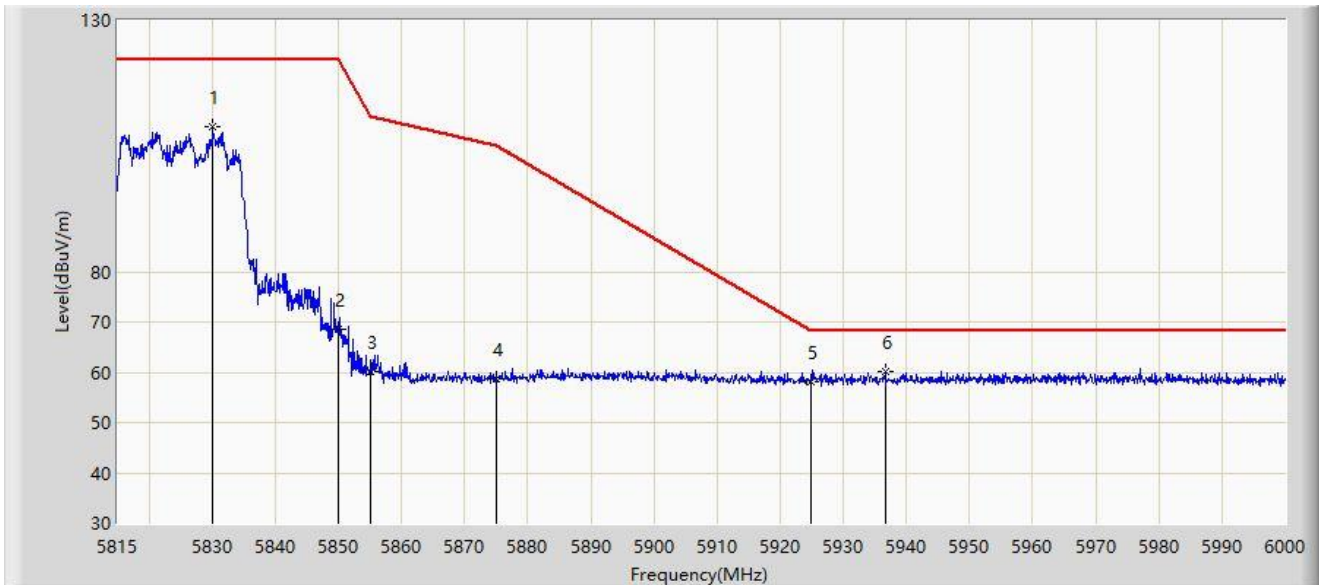

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5830.078	108.931	114.350	N/A	N/A	-5.418	PK
2		5850.000	68.448	73.800	-53.752	122.200	-5.352	PK
3		5855.000	60.057	65.439	-50.743	110.800	-5.382	PK
4		5875.000	58.707	63.733	-46.493	105.200	-5.026	PK
5		5925.000	58.097	63.640	-10.103	68.200	-5.543	PK
6	*	5936.638	60.286	65.807	-7.914	68.200	-5.520	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-29
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: HF907_102862_1-18GHz-AC1	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5190MHz	




No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5150.000	68.773	68.348	-5.227	74.000	0.425	PK
2		5187.550	116.475	76.371	N/A	N/A	40.103	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-29
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: HF907_102862_1-18GHz-AC1	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5190MHz	

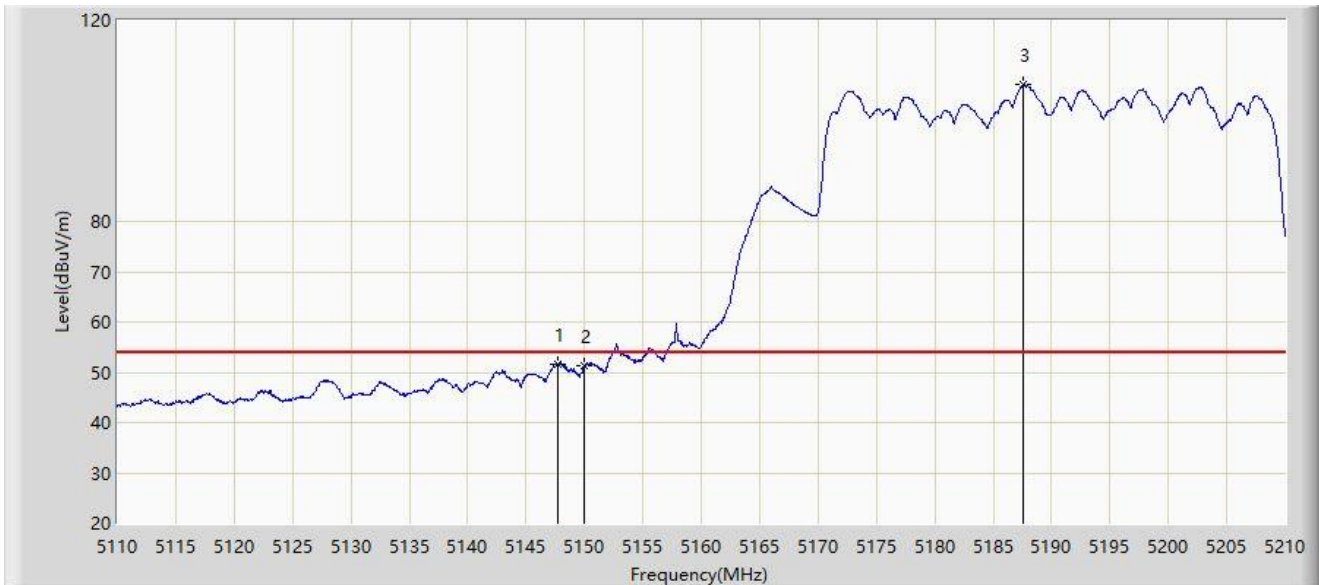


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5147.750	51.550	51.514	-2.450	54.000	0.036	AV
2		5150.000	51.160	50.735	-2.840	54.000	0.425	AV
3		5187.600	107.120	66.965	N/A	N/A	40.154	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-29
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: HF907_102862_1-18GHz-AC1	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5190MHz	

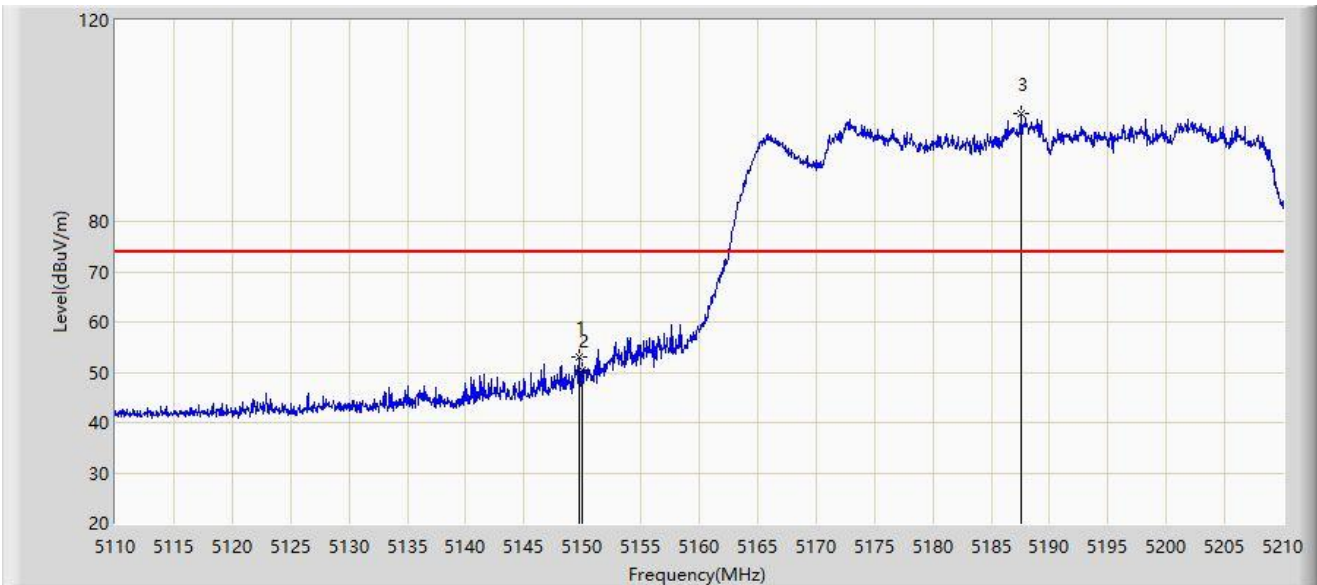


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.700	53.035	52.661	-20.965	74.000	0.375	PK
2		5150.000	50.478	50.053	-23.522	74.000	0.425	PK
3		5187.550	101.543	61.439	N/A	N/A	40.103	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-29
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: HF907_102862_1-18GHz-AC1	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5190MHz	

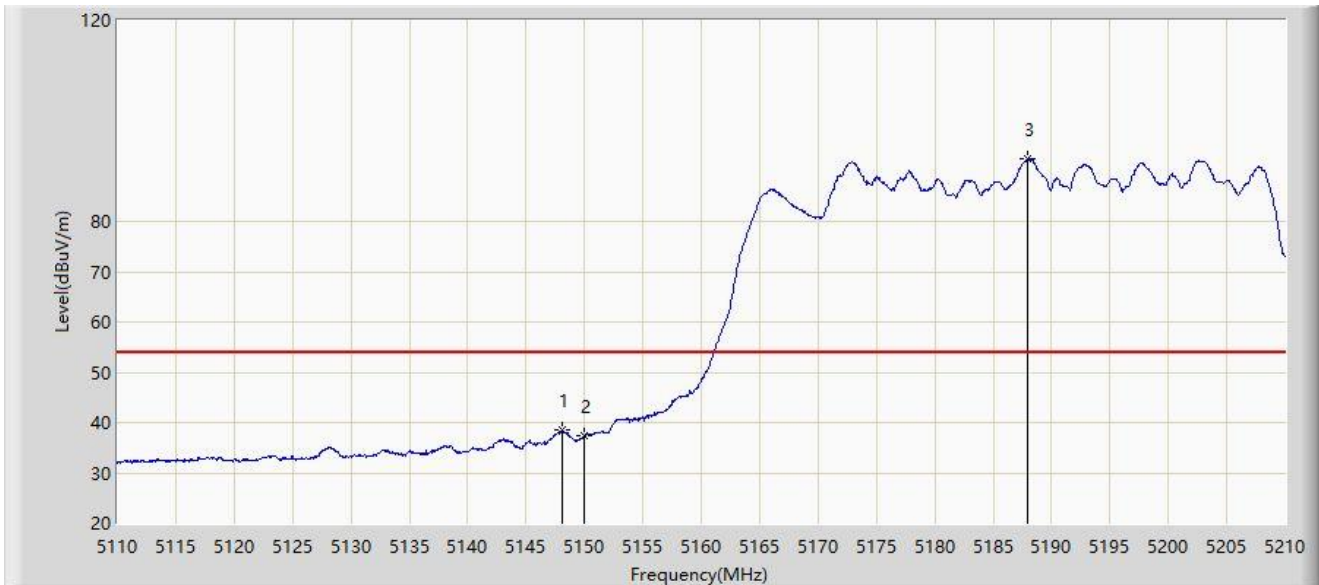


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.100	38.526	38.444	-15.474	54.000	0.083	AV
2		5150.000	37.381	36.956	-16.619	54.000	0.425	AV
3		5187.950	92.325	51.603	N/A	N/A	40.722	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-29
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: HF907_102862_1-18GHz-AC1	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5310MHz	

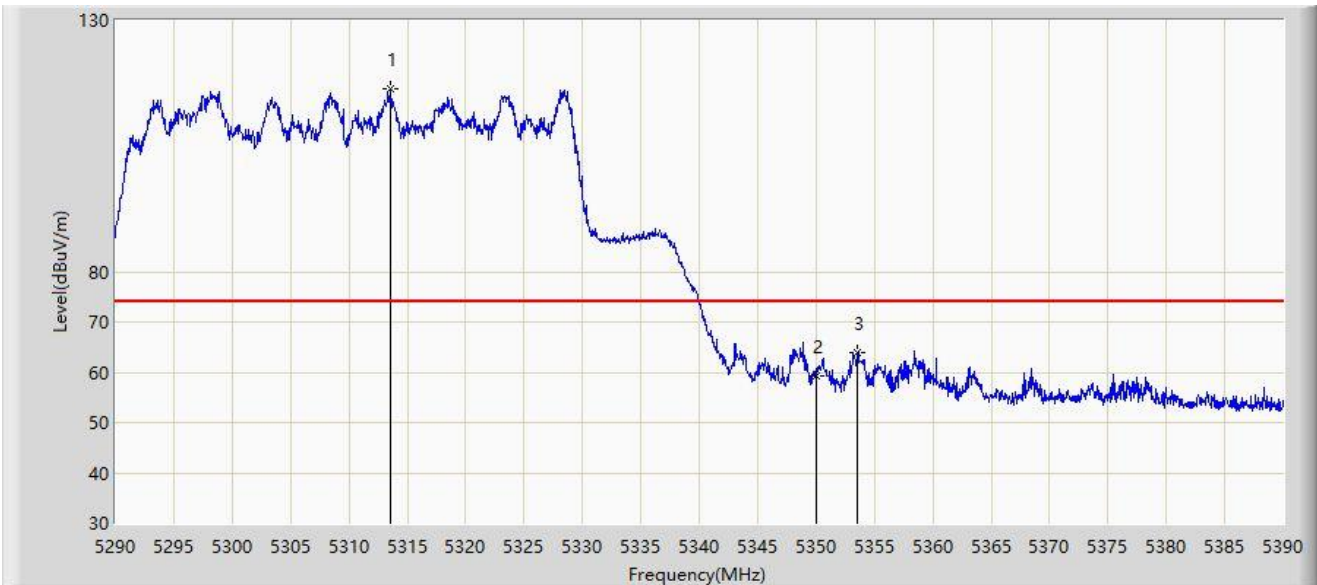


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5313.500	116.379	65.846	N/A	N/A	50.532	PK
2		5350.000	59.283	57.252	-14.717	74.000	2.031	PK
3	*	5353.550	63.837	62.962	-10.163	74.000	0.875	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-29
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: HF907_102862_1-18GHz-AC1	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5310MHz	

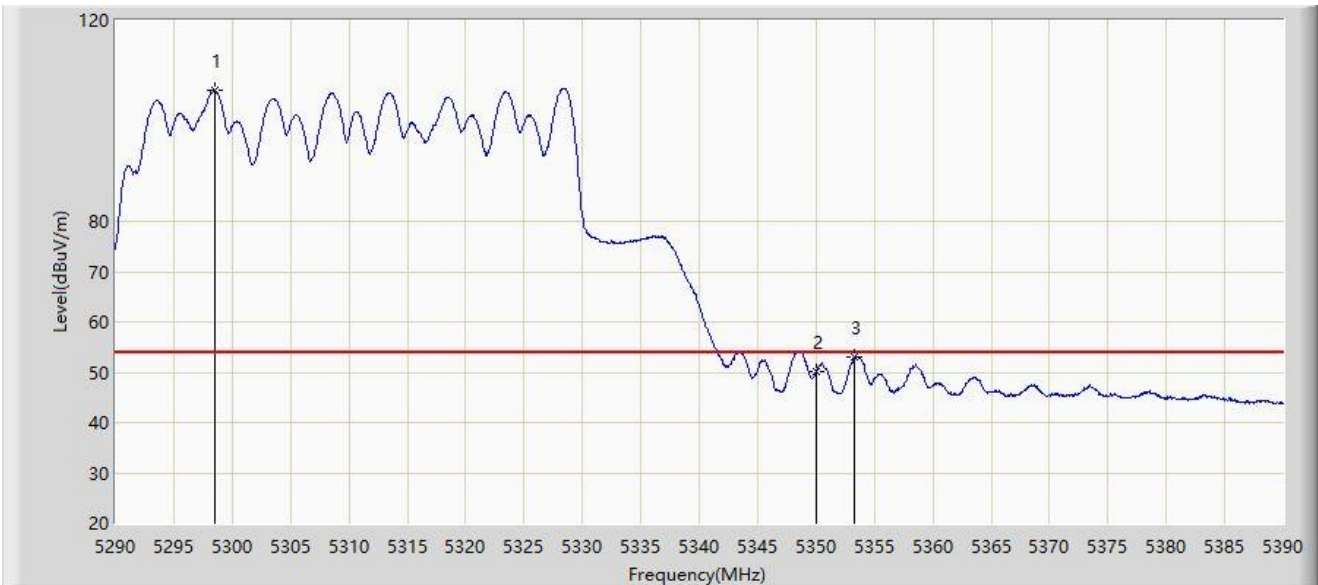


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5298.500	106.064	58.177	N/A	N/A	47.887	AV
2		5350.000	50.024	47.993	-3.976	54.000	2.031	AV
3	*	5353.300	53.177	52.242	-0.823	54.000	0.935	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-29
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: HF907_102862_1-18GHz-AC1	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5310MHz	

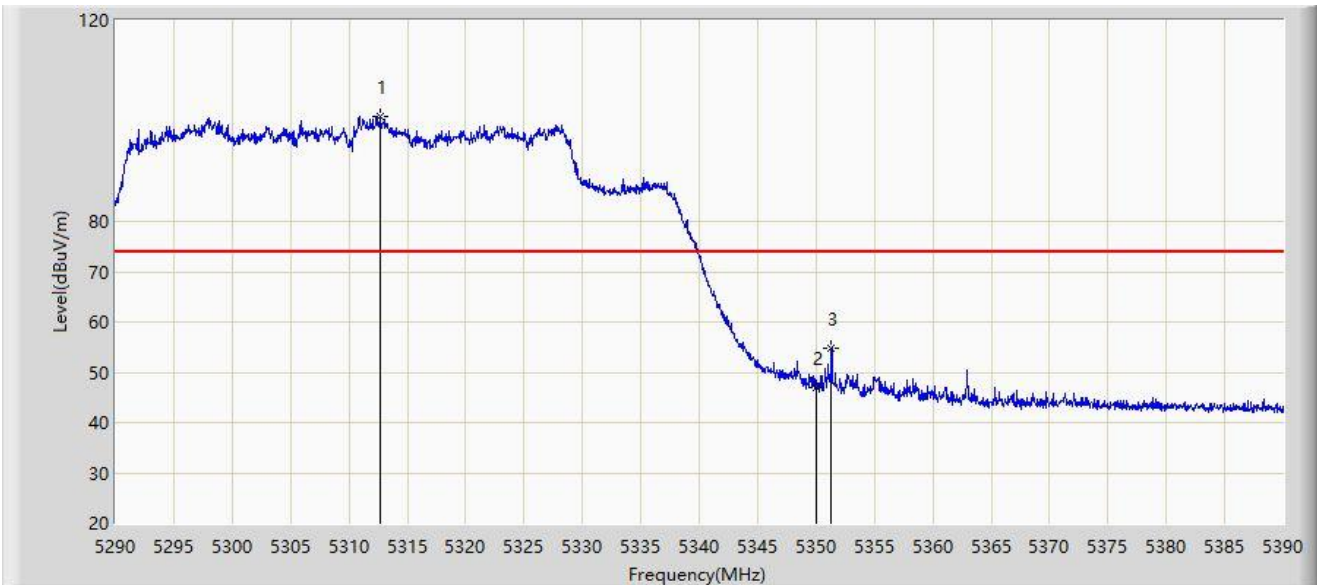


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5312.700	100.975	51.040	N/A	N/A	49.936	PK
2		5350.000	47.062	45.031	-26.938	74.000	2.031	PK
3	*	5351.300	54.852	53.382	-19.148	74.000	1.470	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-05-29
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: HF907_102862_1-18GHz-AC1	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5310MHz	

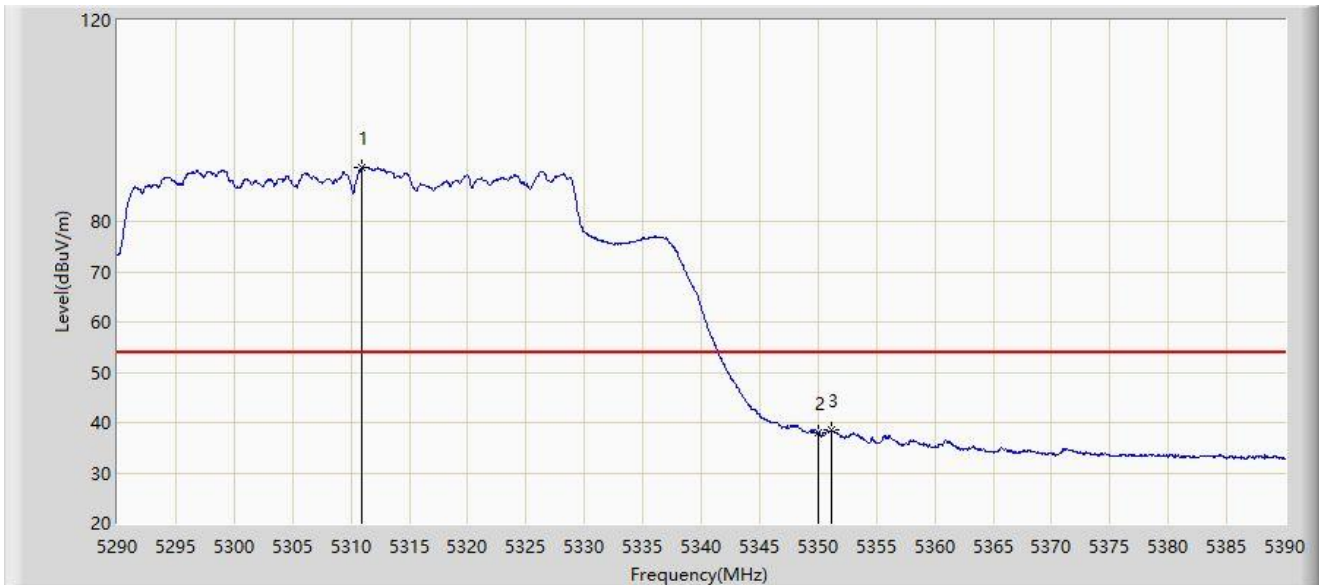

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5310.950	90.653	43.897	N/A	N/A	46.756	AV
2		5350.000	37.871	35.840	-16.129	54.000	2.031	AV
3	*	5351.100	38.613	37.070	-15.387	54.000	1.543	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2024-06-01
Limit: FCC_5G_RE(3m)	Engineer: Oliver Cheng
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11be-EHT40 at 5510MHz	



No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5460.000	57.335	59.636	-10.865	68.200	-2.301	PK
2	*	5464.650	66.531	68.279	-1.669	68.200	-1.748	PK
3		5470.000	65.657	66.247	-2.543	68.200	-0.591	PK
4		5504.600	115.759	70.397	N/A	N/A	45.362	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).