



MEASUREMENT REPORT

FCC PART 15 Subpart C WLAN 802.11b/g/n



FCC ID: Q9DAPINH203

APPLICANT: Hewlett Packard Enterprise Company

Application Type: Certification

Product: ACCESS POINT

Model No.: APINH203


Brand Name:  


FCC Classification: Digital Transmission System (DTS)

FCC Rule Part(s): Part 15 Subpart C (Section 15.247)

Test Procedure(s): ANSI C63.10-2013, KDB 558074 D01v03r05,
KDB 662911 D01v02r01

Test Date: December 28, 2016 ~ March 08, 2017

Reviewed By : 
(Paddy Chen)

Approved By : 
(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01v03r05. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1703TW0106-U1	Rev. 01	Initial report	03-23-2017	Valid

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope.....	6
1.2. MRT Test Location.....	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description.....	7
2.2. Product Specification Subjective to this Report.....	7
2.3. Operating Frequency and Channel List.....	8
2.4. Description of Available Antennas.....	8
2.5. Description of Antenna RF Port.....	9
2.6. Test Mode.....	9
2.7. Description of Test Software.....	10
2.8. Device Capabilities.....	12
2.9. Test Configuration.....	13
2.10. EMI Suppression Device(s)/Modifications.....	13
2.11. Labeling Requirements.....	13
3. DESCRIPTION of TEST	14
3.1. Evaluation Procedure.....	14
3.2. AC Line Conducted Emissions.....	14
3.3. Radiated Emissions.....	15
4. ANTENNA REQUIREMENTS	16
5. TEST EQUIPMENT CALIBRATION DATE	17
6. MEASUREMENT UNCERTAINTY	18
7. TEST RESULT	19
7.1. Summary.....	19
7.2. 6dB Bandwidth Measurement.....	20
7.2.1. Test Limit.....	20
7.2.2. Test Procedure used.....	20
7.2.3. Test Setting.....	20
7.2.4. Test Setup.....	20
7.2.5. Test Result.....	21
7.3. Output Power Measurement.....	26
7.3.1. Test Limit.....	26

7.3.2.	Test Procedure Used	26
7.3.3.	Test Setting.....	26
7.3.4.	Test Setup	26
7.3.5.	Test Result of Output Power	27
7.4.	Power Spectral Density Measurement.....	30
7.4.1.	Test Limit	30
7.4.2.	Test Procedure Used	30
7.4.3.	Test Setting.....	30
7.4.4.	Test Setup	31
7.4.5.	Test Result.....	32
7.5.	Conducted Band Edge and Out-of-Band Emissions	50
7.5.1.	Test Limit	50
7.5.2.	Test Procedure Used	50
7.5.3.	Test Setting.....	50
7.5.4.	Test Setup	51
7.5.5.	Test Result.....	52
7.6.	Radiated Spurious Emission Measurement	69
7.6.1.	Test Limit	69
7.6.2.	Test Procedure Used	69
7.6.3.	Test Setting.....	69
7.6.4.	Test Setup	71
7.6.5.	Test Result.....	73
7.7.	Radiated Restricted Band Edge Measurement.....	105
7.7.1.	Test Limit	105
7.7.2.	Test Procedure Used	106
7.7.3.	Test Setup	106
7.7.4.	Test Result.....	107
7.8.	AC Conducted Emissions Measurement	187
7.8.1.	Test Limit	187
7.8.2.	Test Setup	187
7.8.3.	Test Result.....	188
8.	CONCLUSION	190

§2.1033 General Information

Applicant:	Hewlett Packard Enterprise Company
Applicant Address:	3000 Hanover St. Palo Alto, CA 94304, USA
Manufacturer:	Hewlett Packard Enterprise Company
Manufacturer Address:	3000 Hanover St. Palo Alto, CA 94304, USA
Test Site:	MRT Technology (Taiwan) Co., Ltd
Test Site Address:	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT Registration No.:	153292
FCC Rule Part(s):	Part 15.247
Model No.:	APINH203
FCC ID:	Q9DAPINH203
Test Device Serial No.:	CNCKK2S0W2 <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
FCC Classification:	Digital Transmission System (DTS)

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Fuxing Rd., Taoyuan, Taiwan (R.O.C)

- MRT facility is a FCC registered (MRT Reg. No. 153292) test facility with the site description report on file and is designated by the FCC as an Accredited Test Film.
- MRT facility is an IC registered (MRT Reg. No. 21723-1) test laboratory with the site description on file at Industry Canada.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (TAF) under the American Association for Laboratory Accreditation Program (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, Taiwan, EU and TELEC Rules.

TAF certificate here




1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.



1.2. MRT Test Location

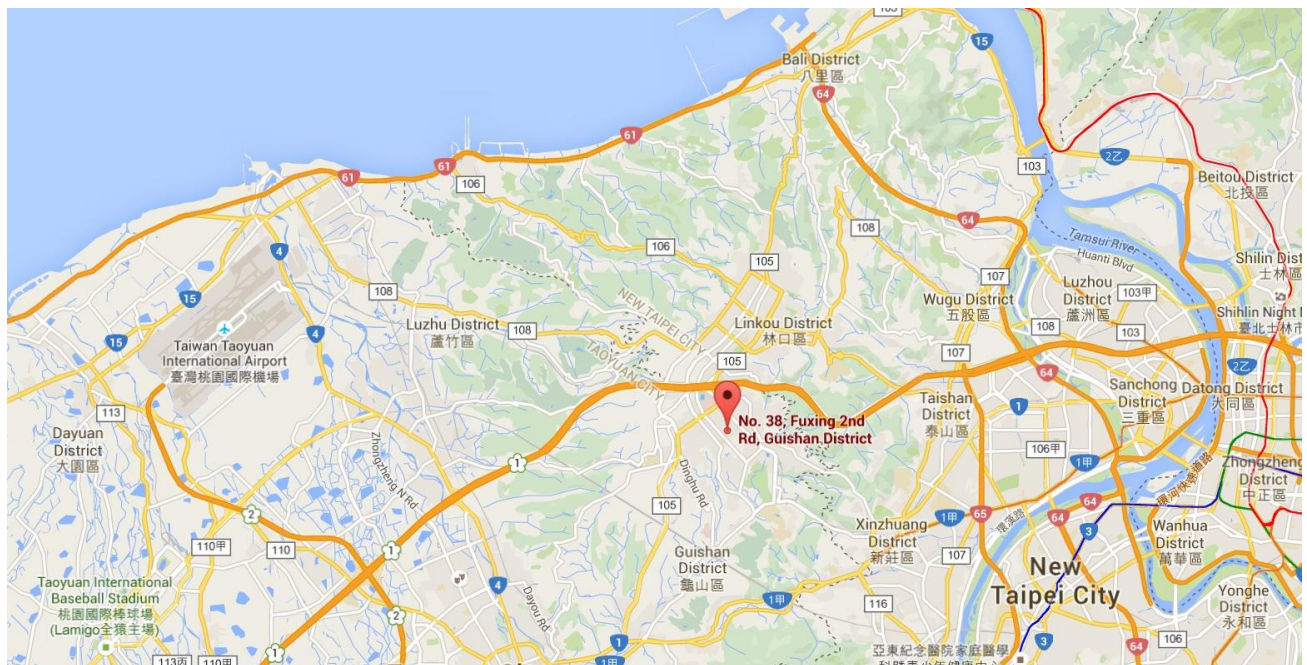The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	ACCESS POINT
Model No.:	APINH203
Brand Name:	 
Software Version:	9.10 RC178.40 e5.0.9.1
Operating Temperature:	0 ~ 40 °C
Power Type:	POE input
Wi-Fi Specification:	802.11a/b/g/n/ac

Note: The applicant has provided one POE adapter (Manufacturer: MICROSEMI & Model: PD-9001GR/AT/AC & Output: 55VDC, 0.6A) for approval testing and it is not for sale.

2.2. Product Specification Subjective to this Report

Frequency Range:	802.11b/g/n-HT20: 2412 ~ 2462MHz 802.11n-HT40: 2422 ~ 2452MHz
Channel Number:	802.11b/g/n-HT20: 11 802.11n-HT40: 7
Type of Modulation:	802.11b: DSSS 802.11g/n: OFDM
Data Rate:	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps
Maximum Average Output Power:	802.11b: 20.22dBm 802.11g: 20.07dBm 802.11n-HT20: 20.06dBm 802.11n-HT40: 19.93dBm

Note: For other features of this EUT, test report will be issued separately.

2.3. Operating Frequency and Channel List

802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n-HT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

2.4. Description of Available Antennas

Antenna Type	Frequency Band (MHz)	TX Paths	Max Antenna Gain (dBi)	Directional Gain (dBi)
PCB Antenna	2412 ~ 2462	1 (Note 3)	4.3	N/A
		2	3.8	6.8
	5150 ~ 5850	1 (Note 3)	6.3	N/A
		2	4.0	7.0

Note 1: The EUT supports Cyclic Delay Diversity (CDD) technology for 802.11a/b/g/n/ac mode, and the transmitter output signal is correlated.


For CDD transmissions, directional gain = $G_{ANT} + \text{Array Gain}$, Array Gain = 3.0 dBi which is declared by the applicant. For power measurements on IEEE 802.11 devices, Array Gain = 0 dB for $N_{ANT} \leq 4$.

Note 2: The EUT also supports Beam Forming technology, and the Beam Forming only support 802.11n/ac mode. Directional gain = $G_{ANT} + \text{BF Gain}$, BF Gain = 3.0 dBi which is declared by the applicant.

Note 3: For SISO mode, only Ant 2 port can transmit 2.4GHz and Ant 1 port can transmit 5GHz.

2.5. Description of Antenna RF Port

Antenna RF Port				
--	2.4GHz RF Port		5GHz RF Port	
Software Control Port for 1Tx	--	Ant 2	Ant 1	--
Software Control Port for 2Tx	Ant 1	Ant 2	Ant 1	Ant 2

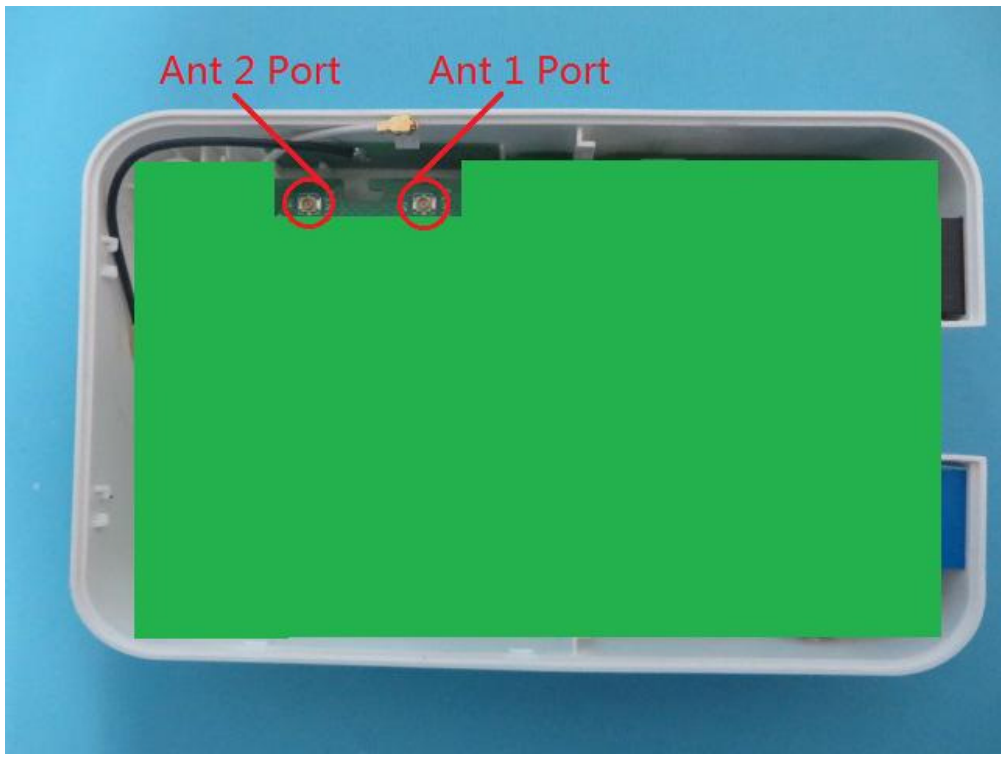

2.6. Test Mode

Test Mode	Mode 1: Transmit by 802.11b
	Mode 2: Transmit by 802.11g
	Mode 3: Transmit by 802.11n-HT20 (CDD Mode / Beam-Forming Mode)
	Mode 4: Transmit by 802.11n-HT40 (CDD Mode / Beam-Forming Mode)

2.7. Description of Test Software

The test utility software used during testing was “AcctonMTool.exe”.

Power Parameter Value

1TX_Ant 2

Test Mode	Test Channel No.	Test Frequency (MHz)	Power Parameter Value
802.11b	1	2412	72.0
	6	2437	72.0
	11	2462	72.0
802.11g	1	2412	68.0
	6	2437	68.0
	11	2462	68.0
802.11n-HT20	1	2412	62.0
	6	2437	68.0
	11	2462	68.0
802.11n-HT40	3	2422	66.0
	6	2437	68.0
	9	2452	68.0

CDD Mode

2TX_Ant 1 + 2

Test Mode	Test Channel No.	Test Frequency (MHz)	Power Parameter Value
802.11b	1	2412	72.0
	6	2437	72.0
	11	2462	72.0
802.11g	1	2412	68.0
	6	2437	68.0
	11	2462	68.0
802.11n-HT20	1	2412	66.0
	6	2437	68.0
	11	2462	66.0
802.11n-HT40	3	2422	66.0
	6	2437	68.0
	9	2452	66.0

Beam-Forming Mode

2TX_Ant 1 + 2

Test Mode	Test Channel No.	Test Frequency (MHz)	Power Parameter Value
802.11n-HT20	1	2412	54.0
	6	2437	68.0
	11	2462	60.0
802.11n-HT40	3	2422	56.0
	6	2437	68.0
	9	2452	58.0

2.8. Device Capabilities


This device contains the following capabilities:

2.4GHz WLAN (DTS) and 5GHz WLAN (UNII).


Note: 2.4GHz WLAN (DTS) operation is possible in 20MHz, and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.11b	95.02%
802.11g	95.07%
802.11n-HT20	94.91%
802.11n-HT40	90.33%


802.11b - Duty Cycle

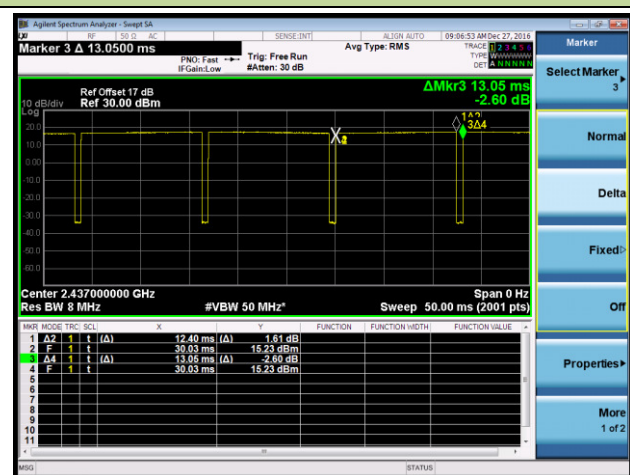


802.11g - Duty Cycle

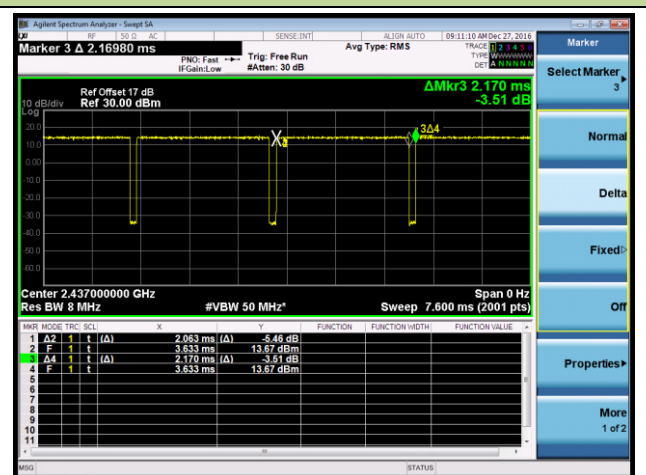

802.11n-HT20 - Duty Cycle

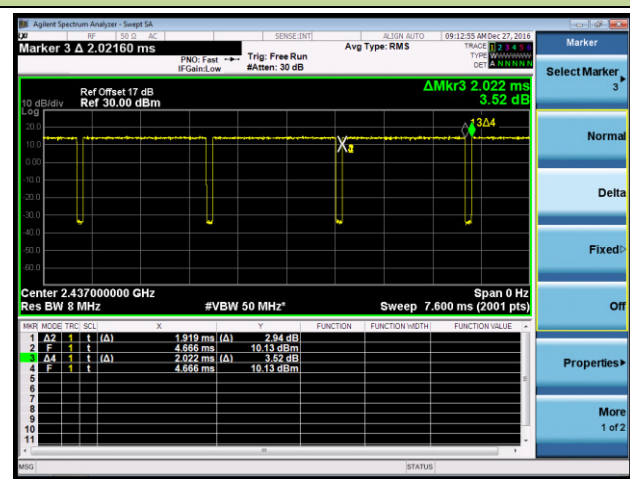

802.11n-HT40 - Duty Cycle

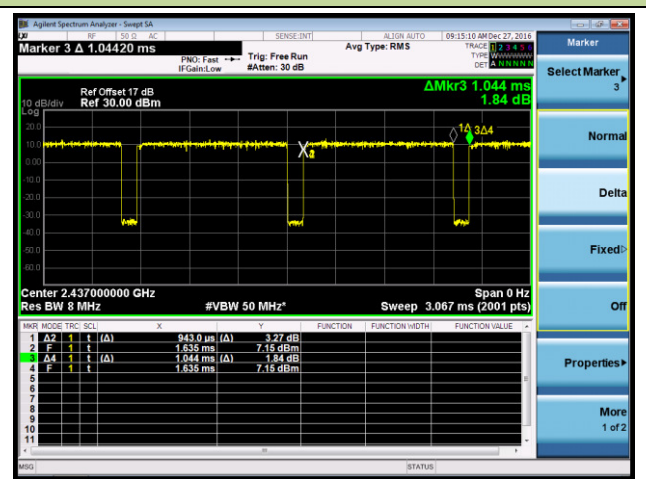

2.9. Test Configuration

The **ACCESS POINT** was tested per the guidance of KDB 558074 D01v03r05. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.10. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.11. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v03r05 were used in the measurement of the **ACCESS POINT**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment which determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.8.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, which produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **ACCESS POINT** is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **ACCESS POINT FCC ID: Q9DAPINH203** unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	2017.03.23
Two-Line V-Network	R&S	ENV216	MRTTWA00020	2017.03.23
Absorbing Clamp	R&S	MDS21	MRTTWA00016	2017.03.02
EMI Test Receiver	R&S	ESR3	MRTTWA00009	2017.03.17
Conducted Cable	Rosnol	N1C50-RG400-B1 C50-500CM	MRTTWE00013	2017.05.20
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	2017.06.09

Radiated Spurious Emission and Radiated Restricted Band Edge - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Due Date
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	2017.04.06
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	2017.04.06
Broadband Hornantenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	2017.04.06
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	2017.04.06
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	2017.04.06
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	2017.04.06
Signal Analyzer	R&S	FSV40	MRTTWA00007	2017.03.02
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	2017.07.11
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00010	2017.05.20

Conducted Test Equipment - SR1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Due Date
Signal Analyzer	R&S	FSV40	MRTTWA00007	2017.03.02
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	2017.07.11
USB wideband power sensor	Boonton	55006	MRTTWA00050	2017/05/08
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	2017.03.18

Software	Version	Function
e3	V 8.3.5	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement - AC1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB
Spurious Emissions, Conducted - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.78dB
Output Power - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB
Power Spectrum Density - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.15dB
Occupied Bandwidth - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%

7. TEST RESULT

7.1. Summary

Product Name: ACCESS POINT
FCC ID: Q9DAPINH203
FCC Classification: Digital Transmission System (DTS)
Data Rate / MCS 1Mbps for 802.11b;
Tested: 6Mbps for 802.11g;
MCS0 for 802.11n-HT20;
MCS0 for 802.11n-HT40

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a) (2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b) (3)	Output Power	$\leq 30.00\text{dBm}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8.0\text{dBm}/3\text{kHz}$		Pass	Section 7.4
15.247(d)	Band Edge / Out-of-Band Emissions	$\geq 30\text{dBc(Average)}$		Pass	Section 7.5
15.205, 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6 & 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) Test Items “6dB Bandwidth” and “Band Edge / Out-of-Band Emissions” have been assessed the MIMO transmission, and showed the worst single test data in this report.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.2.2. Test Procedure used

KDB 558074 D01v03r05 - Section 8.2 Option 2

7.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

7.2.4. Test Setup

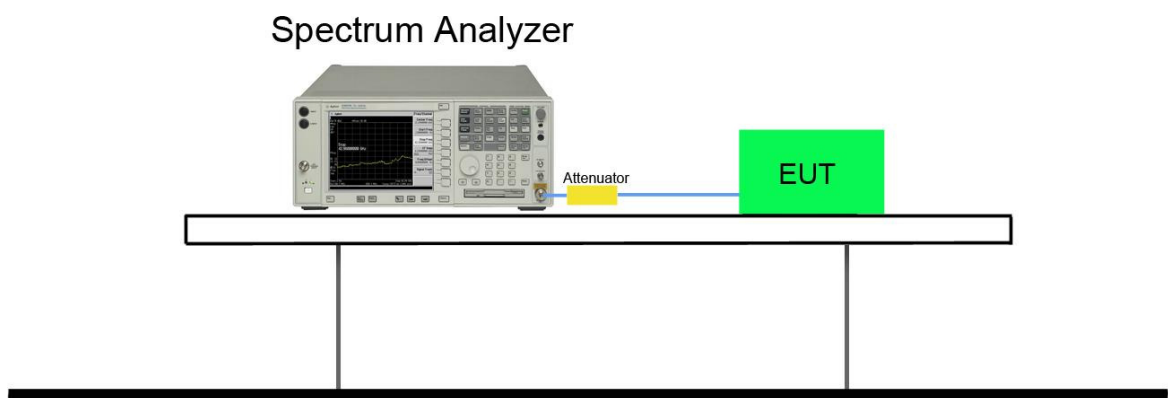


7.2.5. Test Result


Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 2						
802.11b	1Mbps	01	2412	7.58	≥ 0.5	Pass
802.11b	1Mbps	06	2437	7.10	≥ 0.5	Pass
802.11b	1Mbps	11	2462	7.58	≥ 0.5	Pass
802.11g	6Mbps	01	2412	16.38	≥ 0.5	Pass
802.11g	6Mbps	06	2437	16.38	≥ 0.5	Pass
802.11g	6Mbps	11	2462	16.38	≥ 0.5	Pass
802.11n-HT20	MCS0	01	2412	17.61	≥ 0.5	Pass
802.11n-HT20	MCS0	06	2437	17.62	≥ 0.5	Pass
802.11n-HT20	MCS0	11	2462	17.62	≥ 0.5	Pass
802.11n-HT40	MCS0	03	2422	35.58	≥ 0.5	Pass
802.11n-HT40	MCS0	06	2437	35.48	≥ 0.5	Pass
802.11n-HT40	MCS0	09	2452	35.58	≥ 0.5	Pass

802.11b 6dB Bandwidth - Ant 2


Channel 01 (2412MHz)

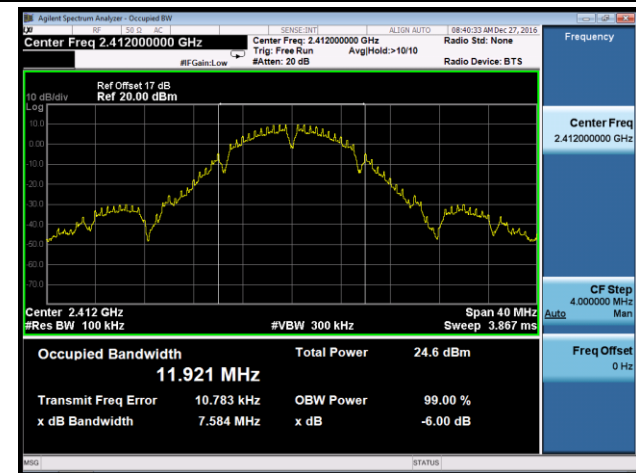

Channel 06 (2437MHz)

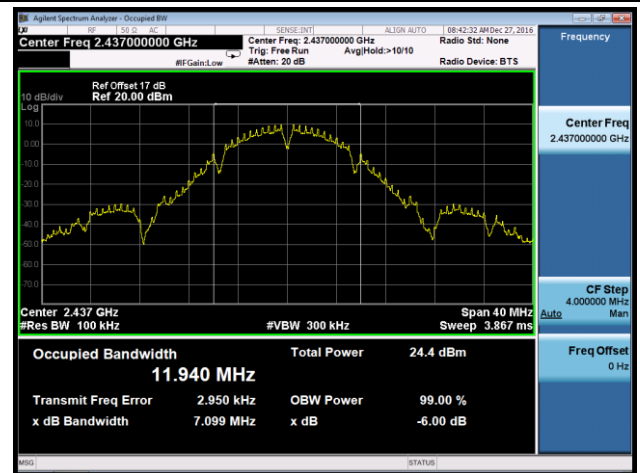


Channel 11 (2462MHz)

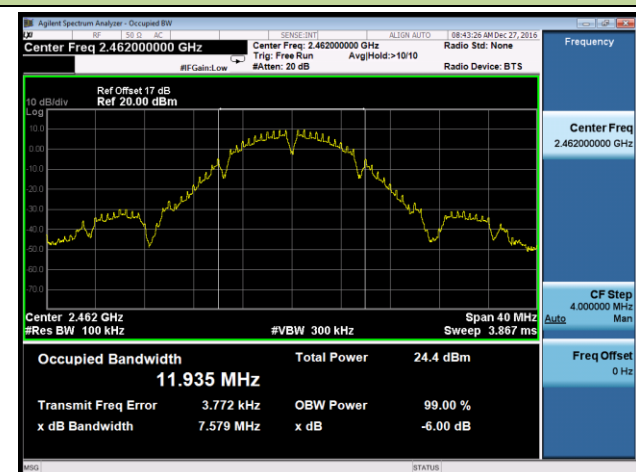


802.11g 6dB Bandwidth - Ant 2


Channel 01 (2412MHz)

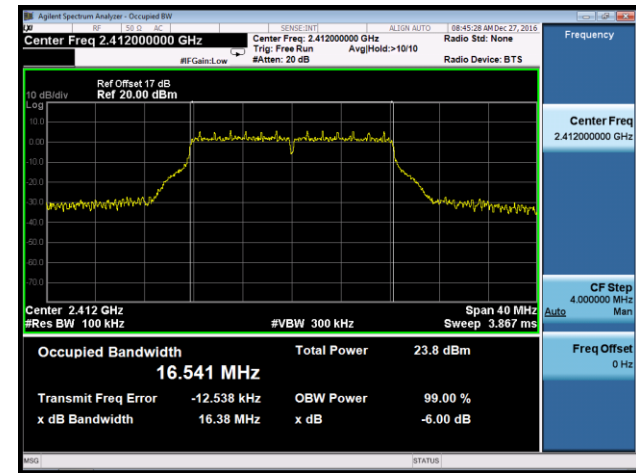

Channel 06 (2437MHz)

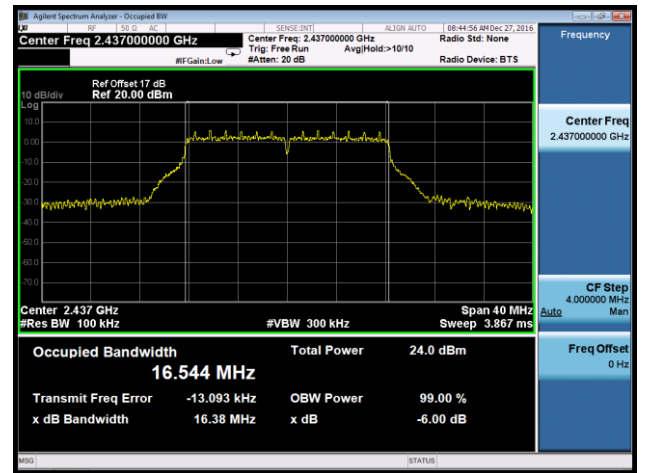


Channel 11 (2462MHz)

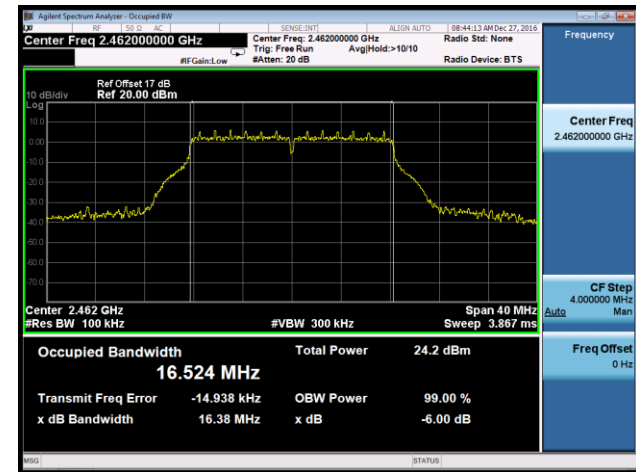


802.11n-HT20 6dB Bandwidth - Ant 2


Channel 01 (2412MHz)

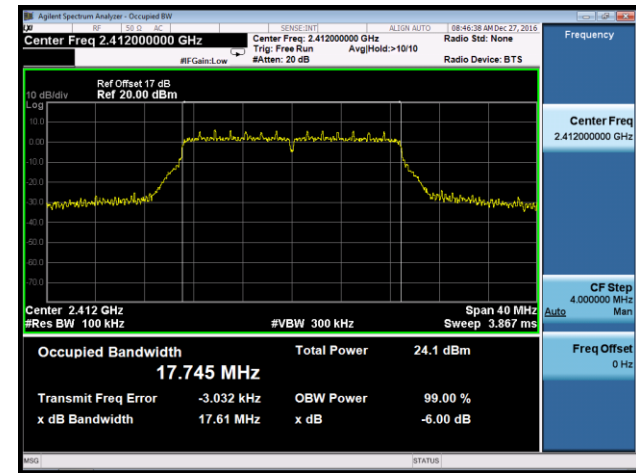

Channel 06 (2437MHz)

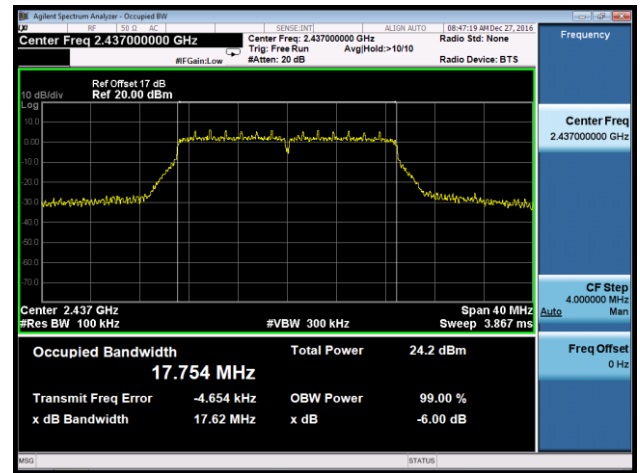


Channel 11 (2462MHz)

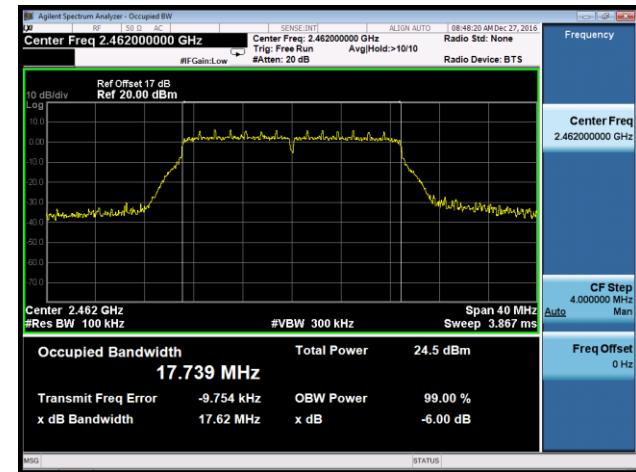


802.11n-HT40 6dB Bandwidth - Ant 2


Channel 03 (2422MHz)

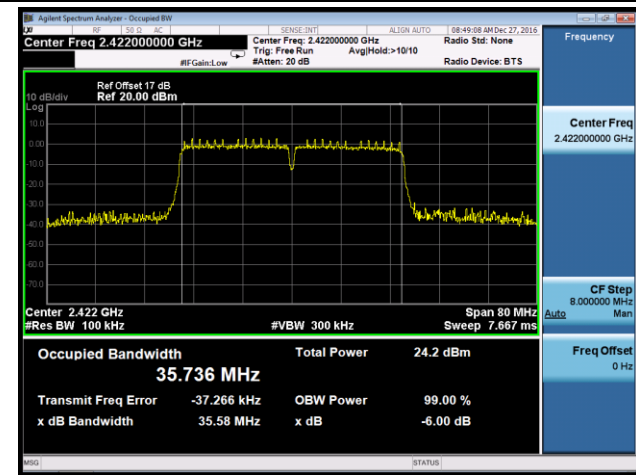

Channel 06 (2437MHz)

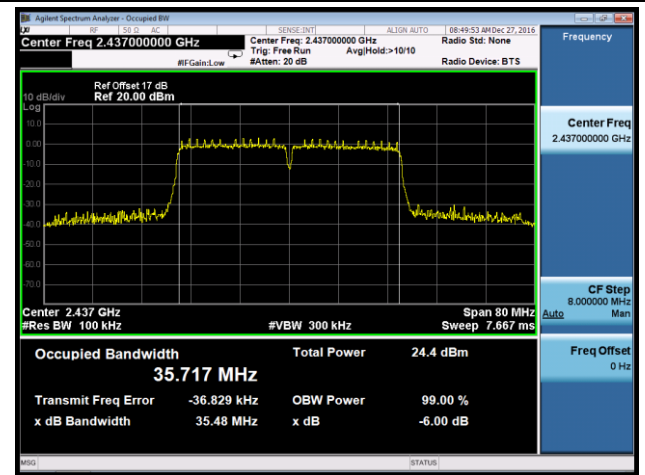

Channel 09 (2452MHz)

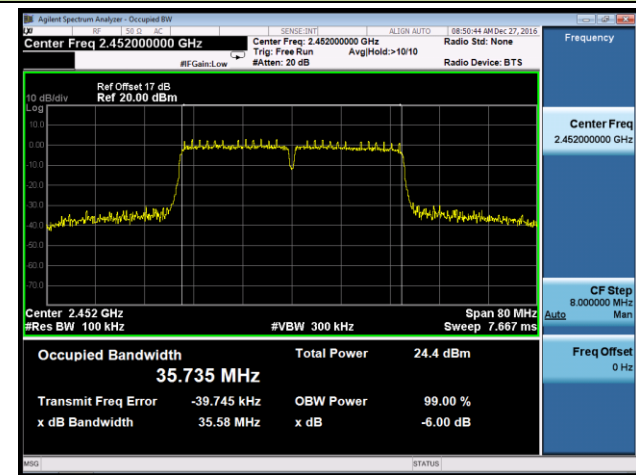

7.3. Output Power Measurement

7.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm).

7.3.2. Test Procedure Used


KDB 558074 D01v03r05 - Section 9.2.3.2 AVGPM-G Average Power Method

7.3.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.3.4. Test Setup

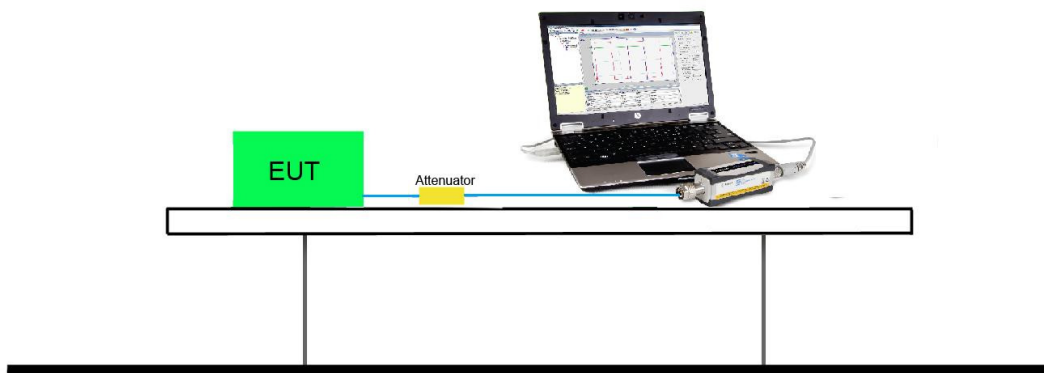

7.3.5. Test Result of Output Power

Power output test was verified over all data rates of each mode shown as below table.

For Ant 2 port

Test Mode	Bandwidth (MHz)	Channel No.	Frequency (MHz)	Data Rate/ MCS	Average Power (dBm)
802.11b	20	6	2437	1Mbps	17.05
				5.5Mbps	16.85
				11Mbps	16.65
802.11g	20	6	2437	6Mbps	16.77
				24Mbps	16.67
				54Mbps	16.34
802.11n	20	6	2437	MCS0	17.08
				MCS4	16.86
				MCS7	26.57
802.11n	40	6	2437	MCS0	16.85
				MCS4	16.57
				MCS7	16.30

Test Result of Average Output Power
CDD Mode
1TX_ Ant 2

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	Result
11b	1Mbps	01	2412	17.01	≤ 30.00	Pass
11b	1Mbps	06	2437	17.05	≤ 30.00	Pass
11b	1Mbps	11	2462	17.02	≤ 30.00	Pass
11g	6Mbps	01	2412	16.74	≤ 30.00	Pass
11g	6Mbps	06	2437	16.77	≤ 30.00	Pass
11g	6Mbps	11	2462	16.97	≤ 30.00	Pass
11n-HT20	MCS0	01	2412	15.30	≤ 30.00	Pass
11n-HT20	MCS0	06	2437	17.08	≤ 30.00	Pass
11n-HT20	MCS0	11	2462	17.02	≤ 30.00	Pass
11n-HT40	MCS0	03	2422	16.03	≤ 30.00	Pass
11n-HT40	MCS0	06	2437	16.85	≤ 30.00	Pass
11n-HT40	MCS0	09	2452	16.72	≤ 30.00	Pass

2TX_ Ant 1 + 2

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Limit (dBm)	Result
				Ant 1	Ant 2			
11b	1Mbps	01	2412	17.29	17.02	20.17	≤ 30.00	Pass
11b	1Mbps	06	2437	17.23	17.03	20.14	≤ 30.00	Pass
11b	1Mbps	11	2462	17.31	17.10	20.22	≤ 30.00	Pass
11g	6Mbps	01	2412	16.81	16.86	19.85	≤ 30.00	Pass
11g	6Mbps	06	2437	17.04	17.07	20.07	≤ 30.00	Pass
11g	6Mbps	11	2462	16.93	17.06	20.01	≤ 30.00	Pass
11n-HT20	MCS0	01	2412	16.37	16.16	19.28	≤ 30.00	Pass
11n-HT20	MCS0	06	2437	17.07	17.03	20.06	≤ 30.00	Pass
11n-HT20	MCS0	11	2462	16.27	16.48	19.39	≤ 30.00	Pass
11n-HT40	MCS0	03	2422	16.23	16.23	19.24	≤ 30.00	Pass
11n-HT40	MCS0	06	2437	16.93	16.85	19.90	≤ 30.00	Pass
11n-HT40	MCS0	09	2452	16.34	16.22	19.29	≤ 30.00	Pass

Note: Total Average Power (dBm) = $10 \cdot \log\{10^{(\text{Ant 1 Average Power}/10)} + 10^{(\text{Ant 2 Average Power}/10)}\}$ (dBm).

Beam-Forming Mode

2TX_ Ant 1 + 2

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Limit (dBm)	Result
				Ant 1	Ant 2			
11n-HT20	MCS0	01	2412	13.64	13.17	16.42	≤ 29.20	Pass
11n-HT20	MCS0	06	2437	17.02	16.46	19.76	≤ 29.20	Pass
11n-HT20	MCS0	11	2462	15.48	14.69	18.11	≤ 29.20	Pass
11n-HT40	MCS0	03	2422	13.89	13.29	16.61	≤ 29.20	Pass
11n-HT40	MCS0	06	2437	17.34	16.45	19.93	≤ 29.20	Pass
11n-HT40	MCS0	09	2452	14.62	13.95	17.31	≤ 29.20	Pass

Note 1: Total Average Power (dBm) = $10 \cdot \log\{10^{(\text{Ant 1 Average Power}/10)} + 10^{(\text{Ant 2 Average Power}/10)}\}$ (dBm).

Note 2: The Power Limit (dBm) = 30 dBm - (6.8 dBi - 6 dBi) = 29.2 dBm.

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

7.4.2. Test Procedure Used


KDB 558074 D01v03r05 - Section 10.5 Method AVGPSD

7.4.3. Test Setting

1. Measure the duty cycle (x) of the transmitter output signal
2. Set instrument center frequency to DTS channel center frequency.
3. Set span to at least 1.5 times the OBW.
4. RBW = 10kHz
5. VBW = 30kHz
6. Detector = RMS
7. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
8. Sweep time = auto couple
9. Don't use sweep triggering. Allow sweep to "free run".
10. Employ trace averaging (RMS) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.
13. Add Constant Factor = $10 \cdot \log(3\text{kHz} / 10\text{kHz}) = -5.23$

7.4.4. Test Setup

Spectrum Analyzer

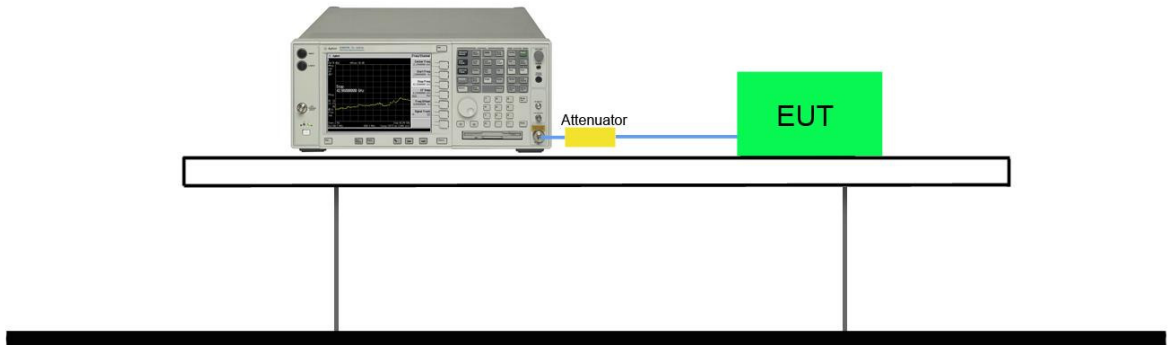

7.4.5. Test Result

1TX_Ant 2

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	AVG PSD (dBm/10kHz)	Duty Cycle (%)	Constant Factor	AVG PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
11b	1Mbps	01	2412	-8.81	95.02	-5.23	-13.82	≤ 8.00	Pass
11b	1Mbps	06	2437	-8.47	95.02	-5.23	-13.48	≤ 8.00	Pass
11b	1Mbps	11	2462	-8.35	95.02	-5.23	-13.36	≤ 8.00	Pass
11g	6Mbps	01	2412	-10.73	95.07	-5.23	-15.74	≤ 8.00	Pass
11g	6Mbps	06	2437	-10.58	95.07	-5.23	-15.59	≤ 8.00	Pass
11g	6Mbps	11	2462	-10.68	95.07	-5.23	-15.69	≤ 8.00	Pass
11n-HT20	MCS0	01	2412	-14.20	94.91	-5.23	-19.20	≤ 8.00	Pass
11n-HT20	MCS0	06	2437	-12.18	94.91	-5.23	-17.18	≤ 8.00	Pass
11n-HT20	MCS0	11	2462	-12.26	94.91	-5.23	-17.26	≤ 8.00	Pass
11n-HT40	MCS0	03	2422	-15.75	90.33	-5.23	-20.54	≤ 8.00	Pass
11n-HT40	MCS0	06	2437	-15.21	90.33	-5.23	-20.00	≤ 8.00	Pass
11n-HT40	MCS0	09	2452	-15.27	90.33	-5.23	-20.06	≤ 8.00	Pass

Note 1: When EUT duty cycle < 98%, the total AVGPDS (dBm/3kHz) = Ant 2 AVGPDS (dBm/10kHz) + 10*log(1/duty cycle) + Constant Factor.

Note 2: When EUT duty cycle > 98%, the total AVGPDS (dBm/3kHz) = Ant 2 AVGPDS (dBm/10kHz) + Constant Factor.

CDD Mode
2TX_Ant 1 + 2

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	AVG PSD (dBm/10kHz)		Duty Cycle (%)	Constant Factor	Total AVG PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
				Ant 1	Ant 2					
11b	1Mbps	01	2412	-7.41	-8.17	95.02	-5.23	-9.77	≤ 8.00	Pass
11b	1Mbps	06	2437	-8.10	-8.35	95.02	-5.23	-10.22	≤ 8.00	Pass
11b	1Mbps	11	2462	-7.68	-8.49	95.02	-5.23	-10.06	≤ 8.00	Pass
11g	6Mbps	01	2412	-10.63	-11.01	95.07	-5.23	-12.81	≤ 8.00	Pass
11g	6Mbps	06	2437	-10.12	-11.29	95.07	-5.23	-12.66	≤ 8.00	Pass
11g	6Mbps	11	2462	-10.67	-10.96	95.07	-5.23	-12.81	≤ 8.00	Pass
11n-HT20	MCS0	01	2412	-12.77	-12.99	94.91	-5.23	-14.87	≤ 8.00	Pass
11n-HT20	MCS0	06	2437	-12.37	-12.27	94.91	-5.23	-14.31	≤ 8.00	Pass
11n-HT20	MCS0	11	2462	-12.33	-13.07	94.91	-5.23	-14.68	≤ 8.00	Pass
11n-HT40	MCS0	03	2422	-15.68	-15.44	90.33	-5.23	-17.34	≤ 8.00	Pass
11n-HT40	MCS0	06	2437	-15.14	-15.05	90.33	-5.23	-16.87	≤ 8.00	Pass
11n-HT40	MCS0	09	2452	-15.21	-14.82	90.33	-5.23	-16.79	≤ 8.00	Pass

Note 1: When EUT duty cycle < 98%, the Total AVGPSSD (dBm/3kHz) = $10 \cdot \log\{10^{(\text{Ant 1 AVGPSSD}/10)} + 10^{(\text{Ant 2 AVGPSSD}/10)}\} + 10 \cdot \log(1/\text{duty cycle}) + \text{Constant Factor}$.

Note 2: When EUT duty cycle > 98%, the Total AVGPSSD (dBm/3kHz) = $10 \cdot \log\{10^{(\text{Ant 1 AVGPSSD}/10)} + 10^{(\text{Ant 2 AVGPSSD}/10)}\} + \text{Constant Factor}$.

Beam-Forming Mode
2TX_Ant 1 + 2

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	AVG PSD (dBm/10kHz)		Duty Cycle (%)	Constant Factor	Total AVG PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
				Ant 1	Ant 2					
11n-HT20	MCS0	01	2412	-16.10	-16.49	94.91	-5.23	-18.28	≤ 7.20	Pass
11n-HT20	MCS0	06	2437	-12.17	-12.66	94.91	-5.23	-14.40	≤ 7.20	Pass
11n-HT20	MCS0	11	2462	-14.28	-14.68	94.91	-5.23	-16.47	≤ 7.20	Pass
11n-HT40	MCS0	03	2422	-17.42	-18.60	90.33	-5.23	-19.75	≤ 7.20	Pass
11n-HT40	MCS0	06	2437	-15.33	-15.69	90.33	-5.23	-17.28	≤ 7.20	Pass
11n-HT40	MCS0	09	2452	-17.87	-18.27	90.33	-5.23	-19.84	≤ 7.20	Pass

Note 1: When EUT duty cycle < 98%, the Total AVGPSSD (dBm/3kHz) = $10 \cdot \log\{10^{(\text{Ant 1 AVGPSSD}/10)} + 10^{(\text{Ant 2 AVGPSSD}/10)}\} + 10 \cdot \log(1/\text{duty cycle}) + \text{Constant Factor}$.

Note 2: When EUT duty cycle > 98%, the Total AVGPSSD (dBm/3kHz) = $10 \cdot \log\{10^{(\text{Ant 1 AVGPSSD}/10)} + 10^{(\text{Ant 2 AVGPSSD}/10)}\} + \text{Constant Factor}$.

Note 3: PSD Limit (dBm/3kHz) = 8 dBm/3kHz – (6.8 dBi – 6dBi) = 7.2 dBm/3kHz.

802.11b AVGPDS - Ant 2

Channel 01 (2412MHz)



Channel 06 (2437MHz)




Channel 11 (2462MHz)




802.11g AVGPDS - Ant 2


Channel 01 (2412MHz)

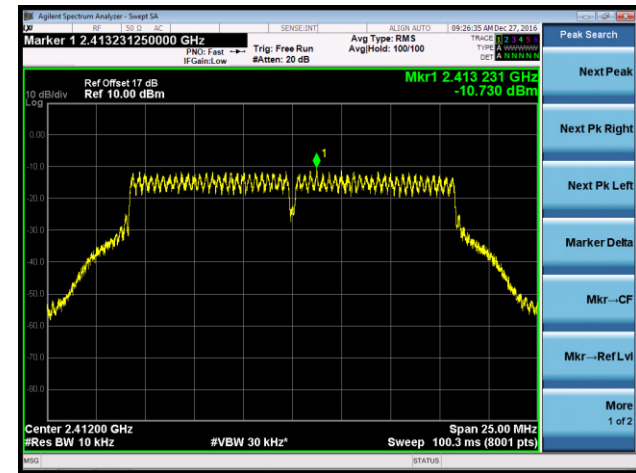

Channel 06 (2437MHz)

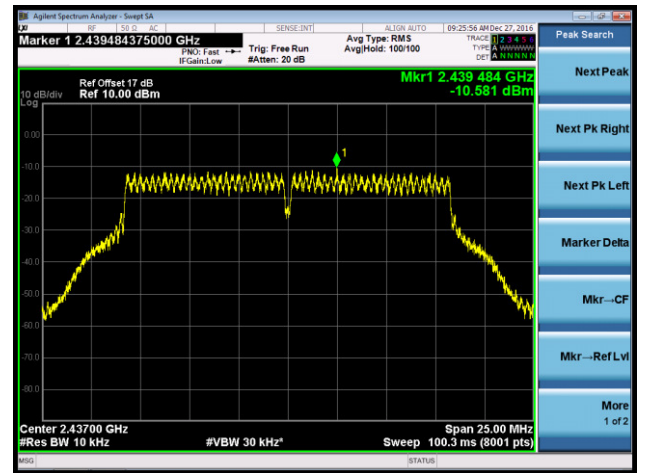


Channel 11 (2462MHz)

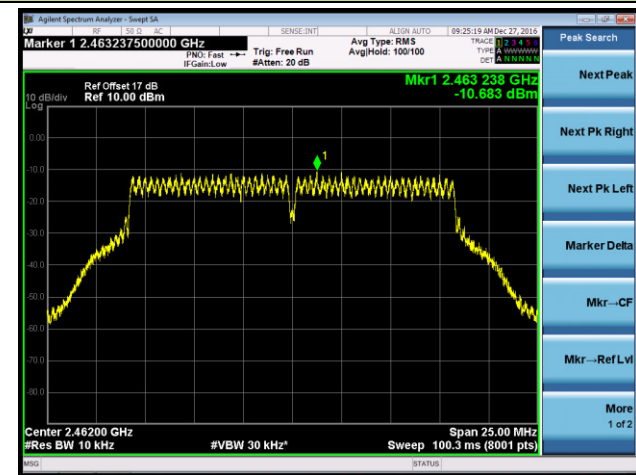


802.11n-HT20 AVGPDS - Ant 2


Channel 01 (2412MHz)

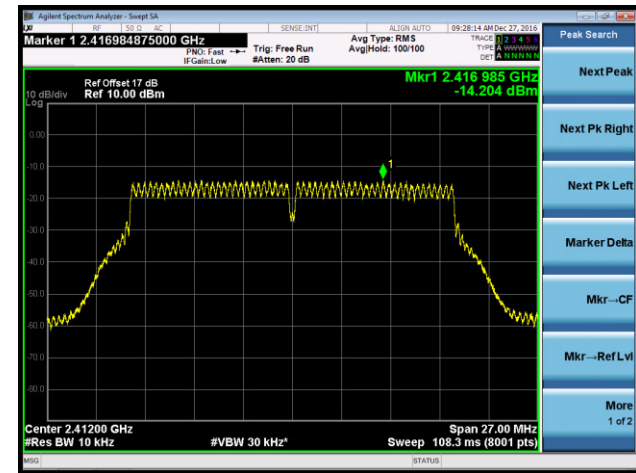

Channel 06 (2437MHz)

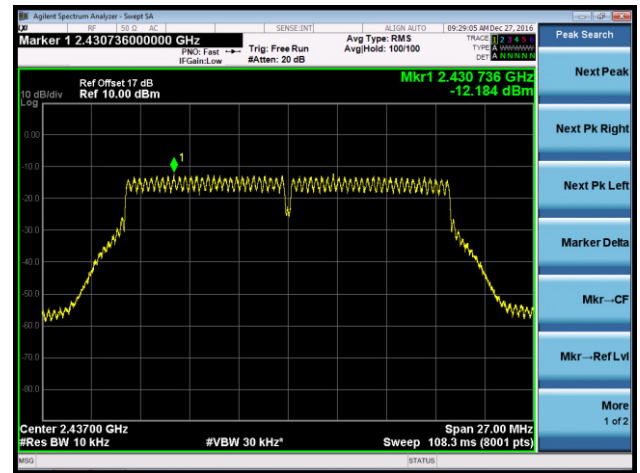


Channel 11 (2462MHz)

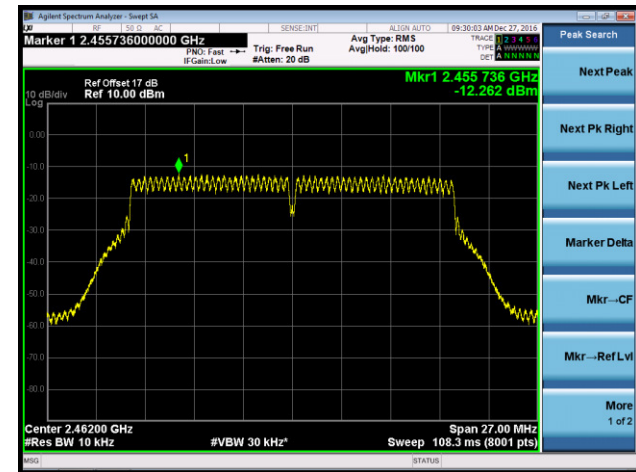


802.11n-HT40 AVGPSSD - Ant 2


Channel 03 (2422MHz)

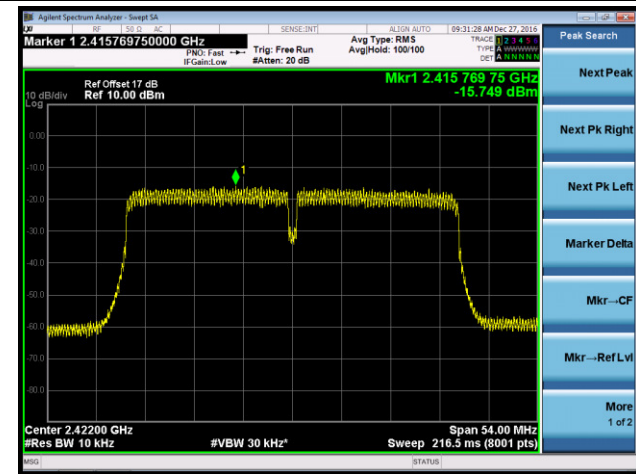

Channel 06 (2437MHz)

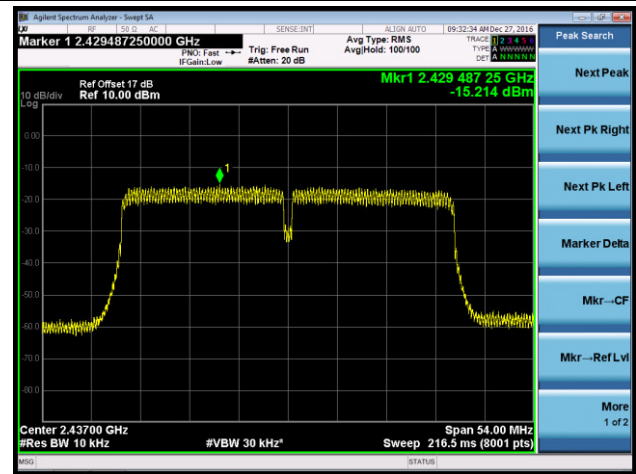

Channel 09 (2452MHz)

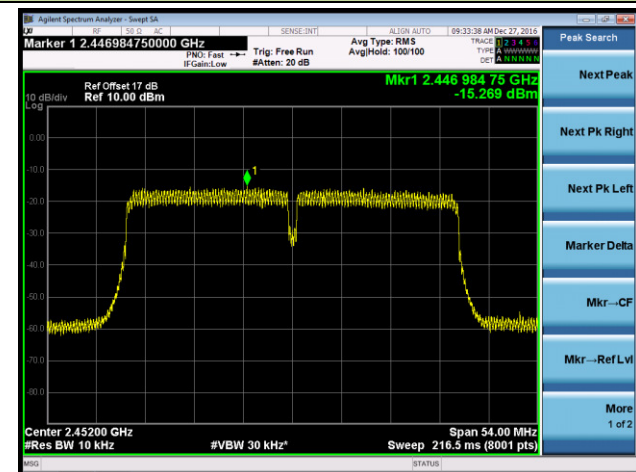

CDD Mode

802.11bv AVGPSD - Ant 1 / Ant 1 + 2


Channel 01 (2412MHz)



Channel 06 (2437MHz)




Channel 11 (2462MHz)

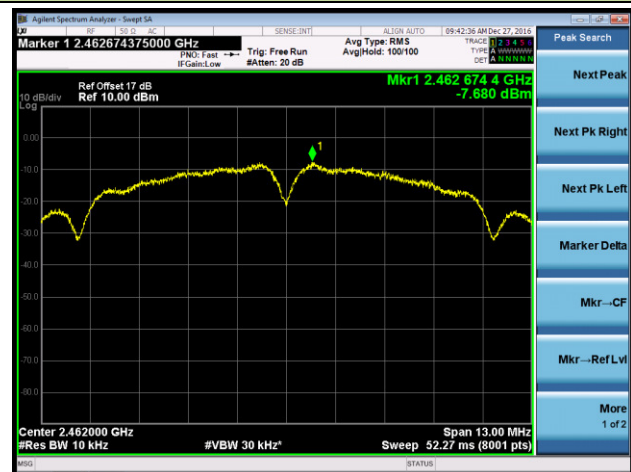


802.11g AVGPDS - Ant 1 / Ant 1 + 2


Channel 01 (2412MHz)

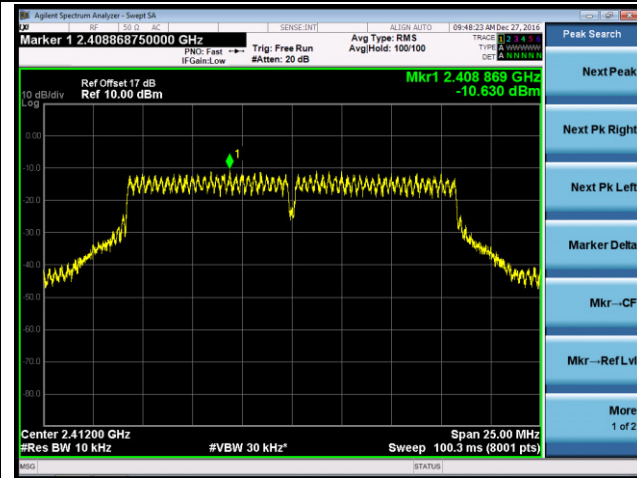

Channel 06 (2437MHz)

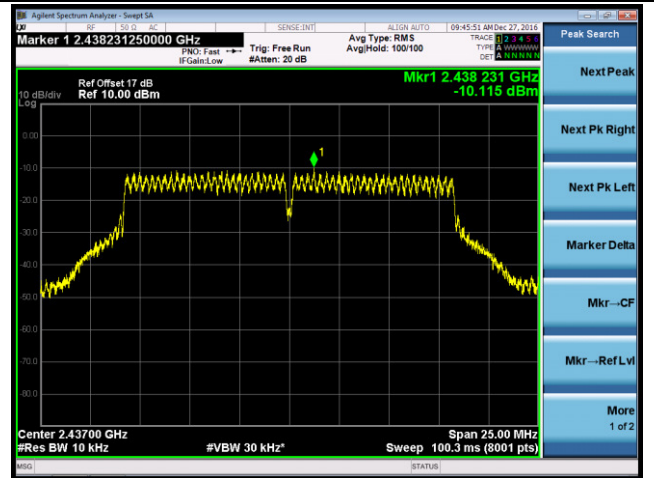


Channel 11 (2462MHz)

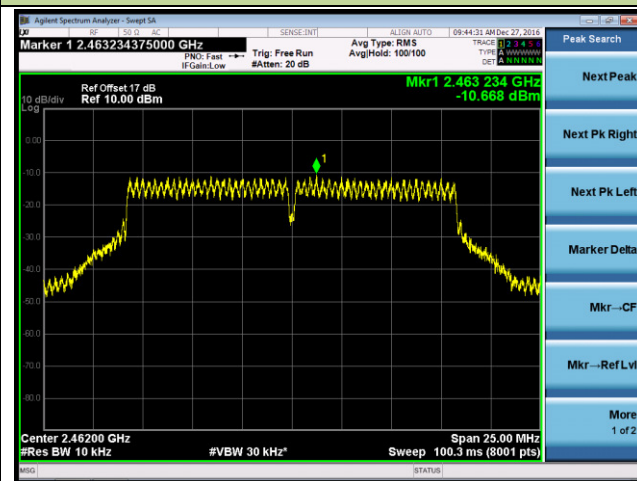


802.11n-HT20 AVGPDS - Ant 1 / Ant 1 + 2


Channel 01 (2412MHz)

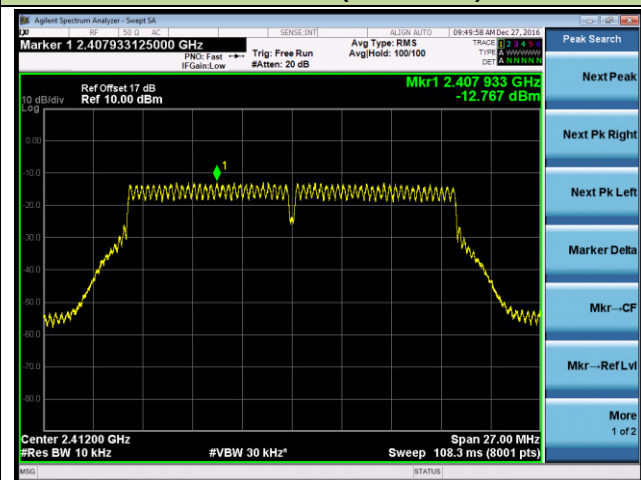

Channel 06 (2437MHz)

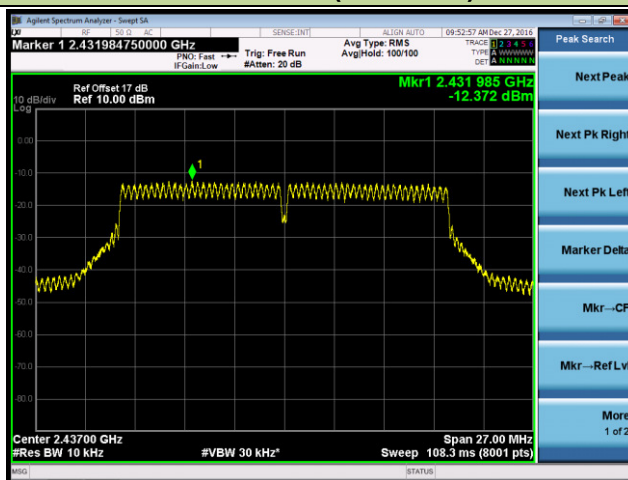


Channel 11 (2462MHz)

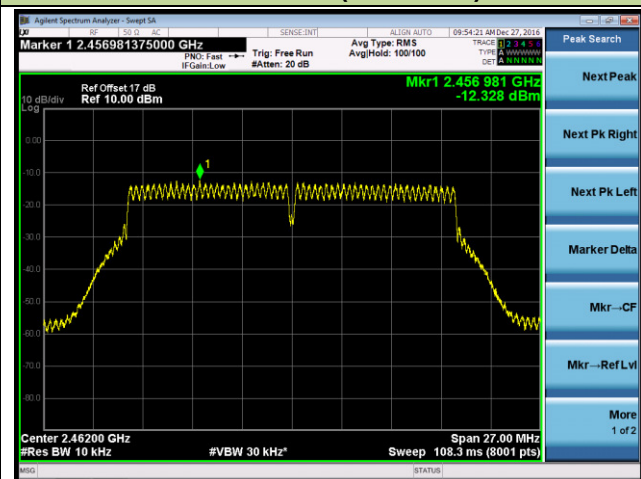


802.11n-HT40 AVGPDS - Ant 1 / Ant 1 + 2


Channel 03 (2422MHz)

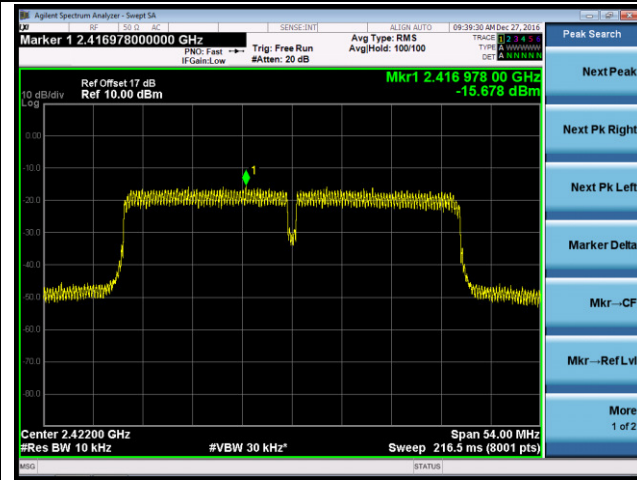

Channel 06 (2437MHz)

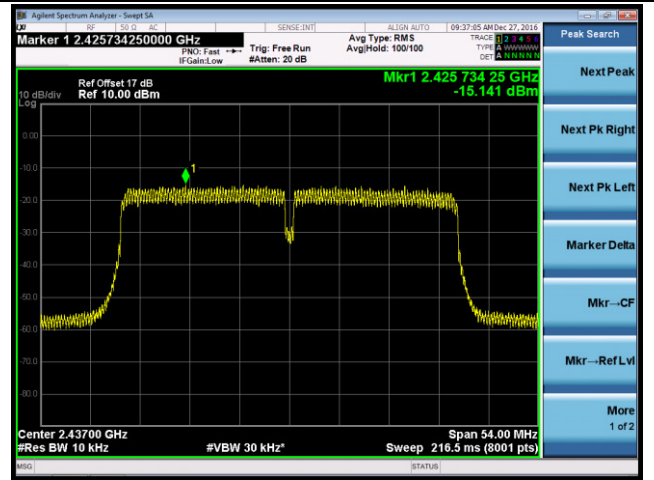

Channel 09 (2452MHz)

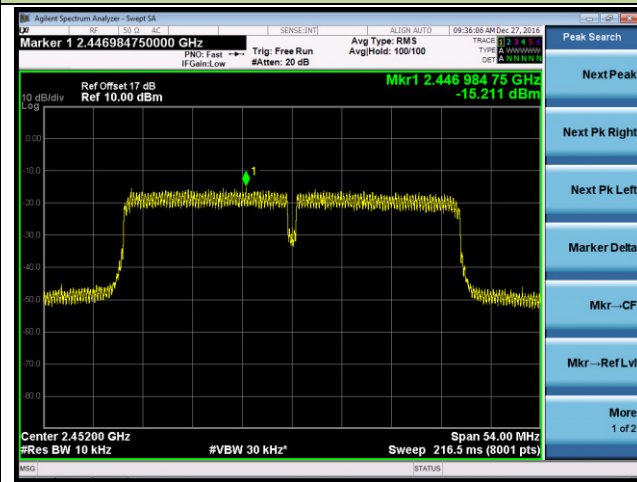

802.11b AVGPDS - Ant 2 / Ant 1 + 2

Channel 01 (2412MHz)



Channel 06 (2437MHz)




Channel 11 (2462MHz)




802.11g AVGPDS - Ant 2 / Ant 1 + 2


Channel 01 (2412MHz)

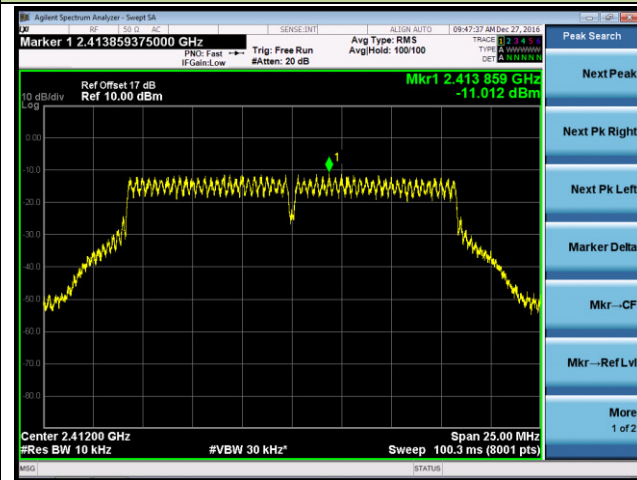

Channel 06 (2437MHz)

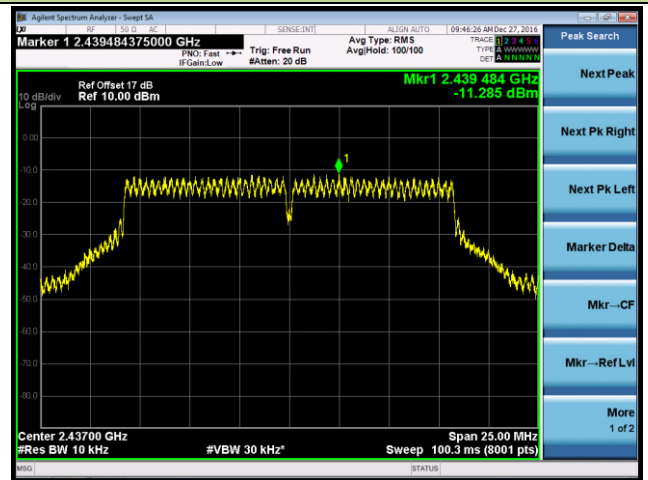


Channel 11 (2462MHz)

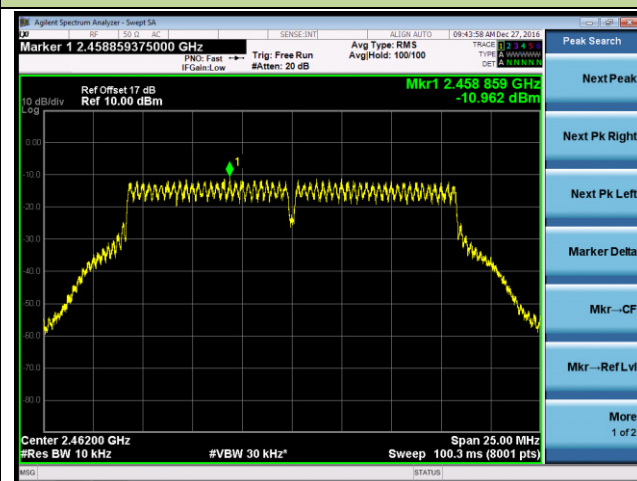


802.11n-HT20 AVGPDS - Ant 2 / Ant 1 + 2


Channel 01 (2412MHz)

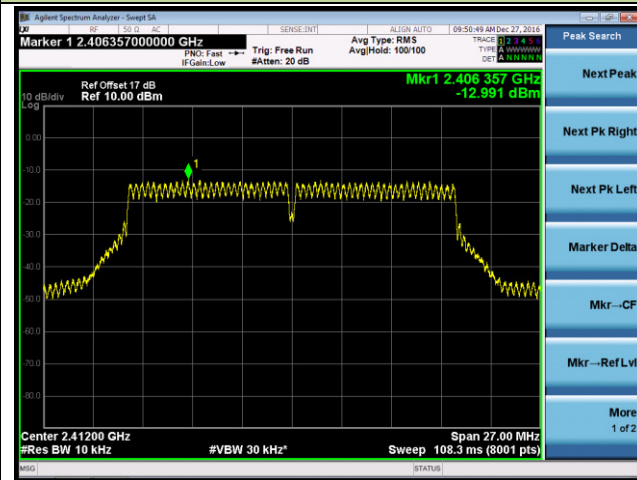

Channel 06 (2437MHz)

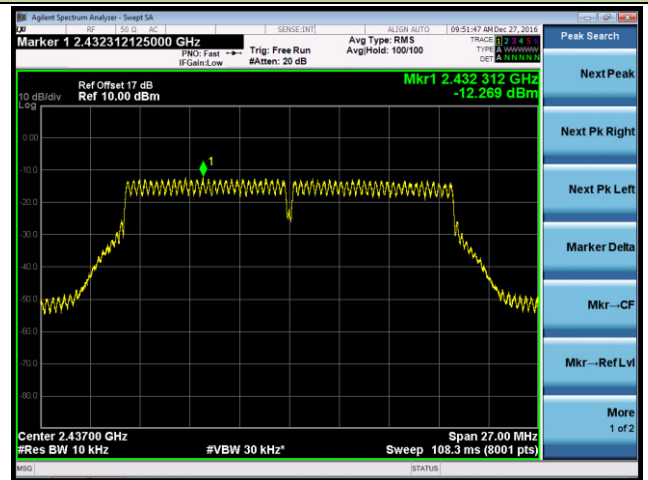


Channel 11 (2462MHz)

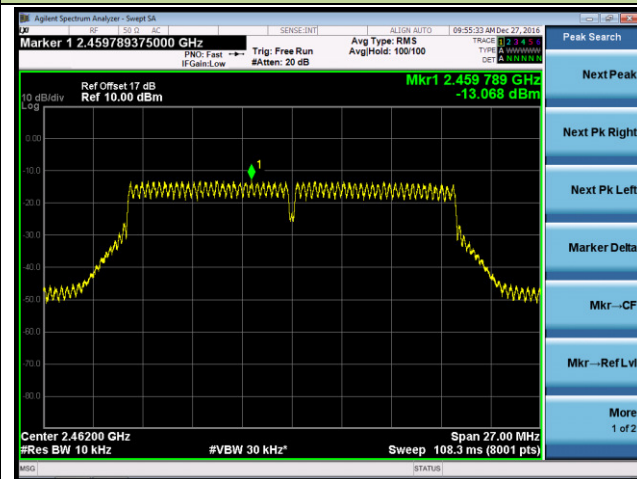

802.11n-HT40 AVGPSD - Ant 2 / Ant 1 + 2

Channel 03 (2422MHz)

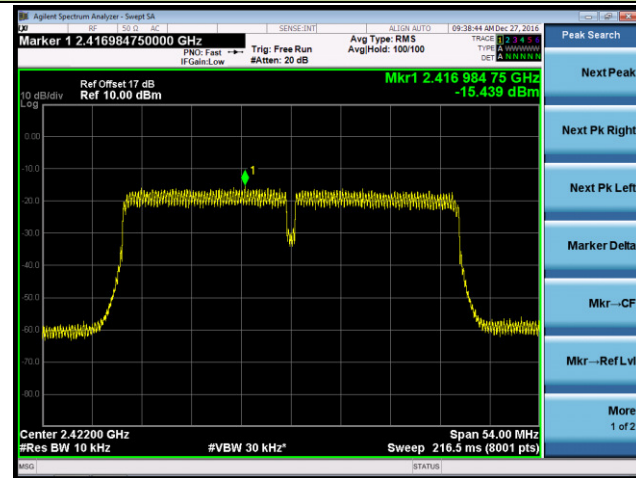

Channel 06 (2437MHz)



Channel 09 (2452MHz)

