


Site: AC1	Time: 2016/12/24 - 07:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 1	

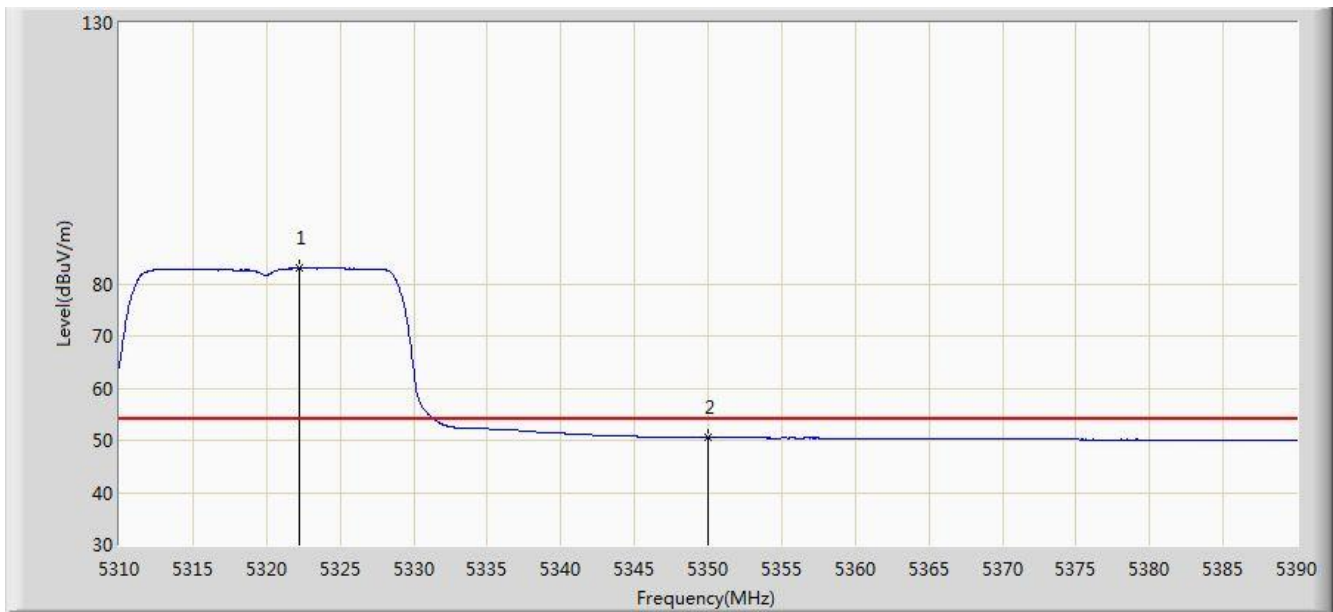


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.200	82.960	43.710	N/A	N/A	39.251	AV
2			5350.000	50.584	11.259	-3.416	54.000	39.324	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 07:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 1	

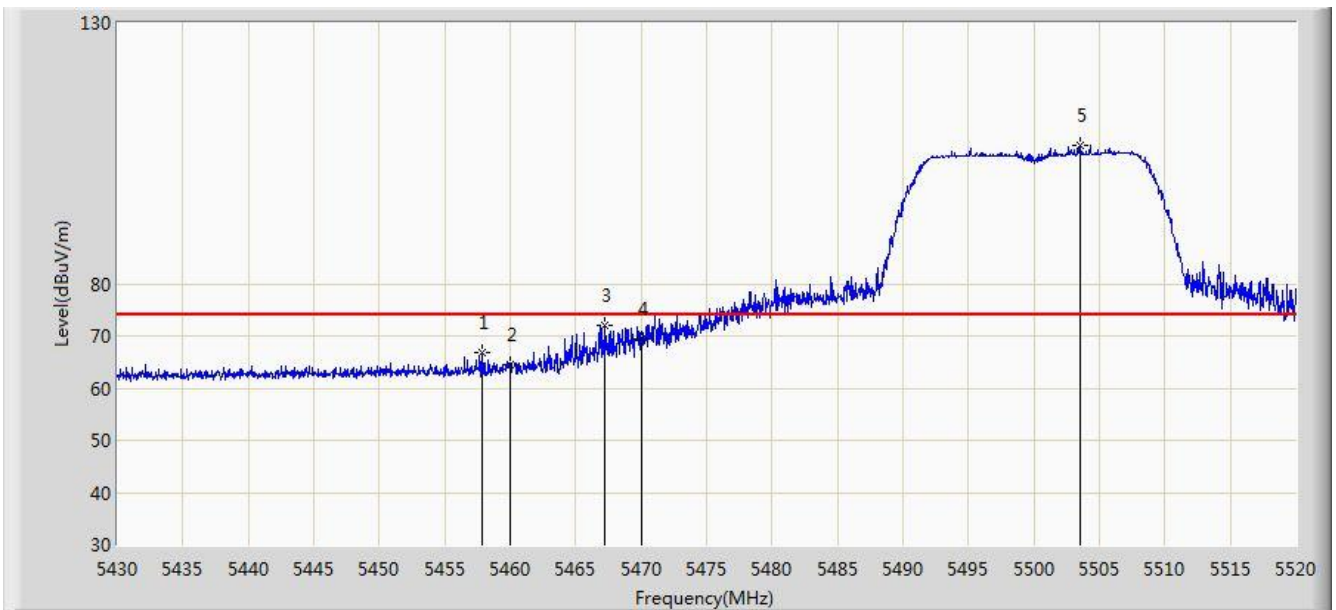


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.900	66.738	27.106	-7.262	74.000	39.632	PK
2			5460.000	64.416	24.780	-9.584	74.000	39.636	PK
3			5467.170	71.992	32.343	-2.008	74.000	39.649	PK
4			5470.000	69.465	29.811	-4.535	74.000	39.654	PK
5		*	5503.530	106.464	66.747	N/A	N/A	39.717	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 07:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 1	

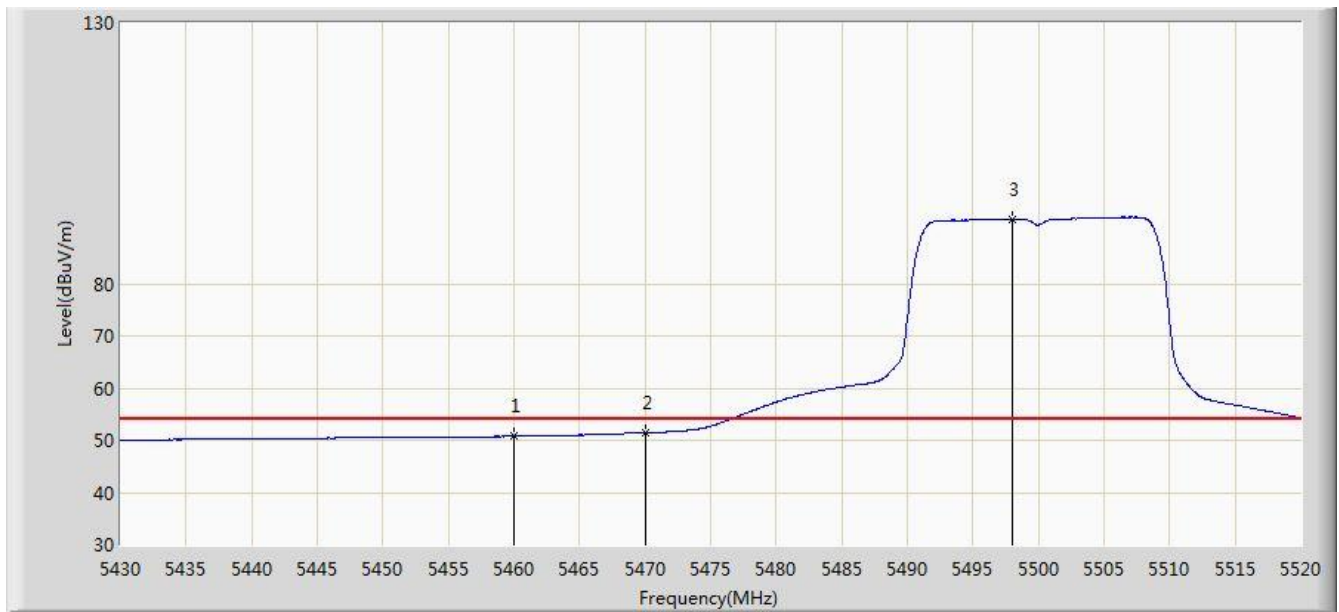


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.795	11.159	-3.205	54.000	39.636	AV
2			5470.000	51.437	11.783	-2.563	54.000	39.654	AV
3		*	5497.995	92.339	52.632	N/A	N/A	39.707	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 07:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 1	

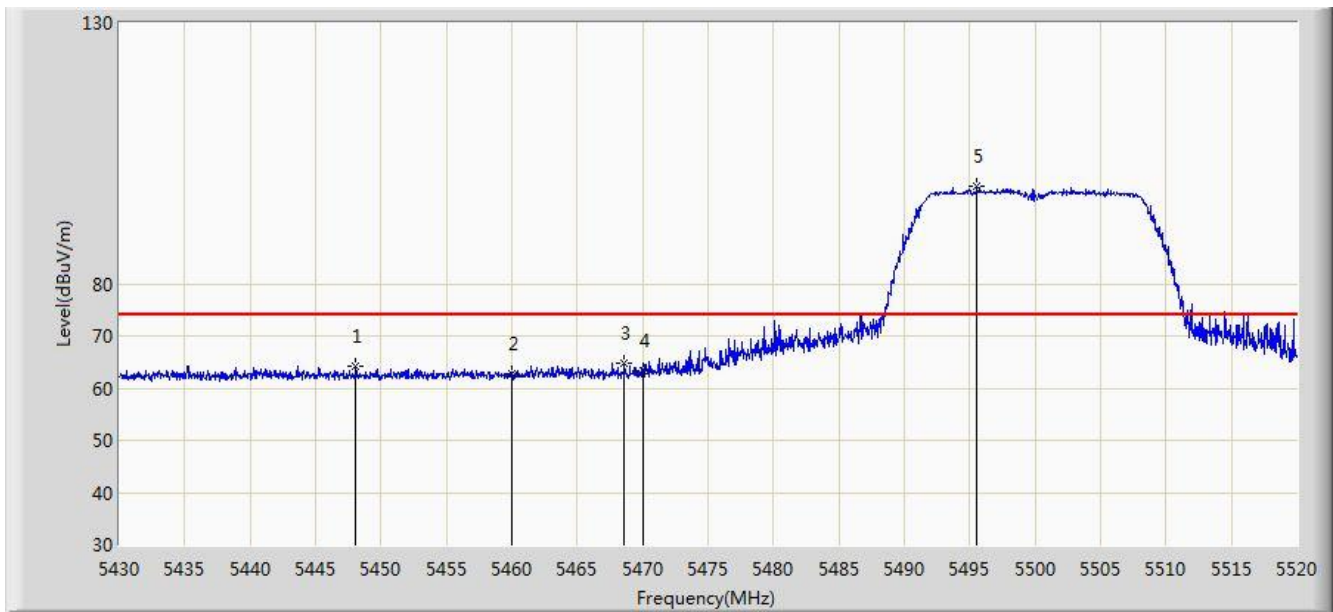


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5448.045	64.076	24.468	-9.924	74.000	39.608	PK
2			5460.000	62.702	23.066	-11.298	74.000	39.636	PK
3			5468.610	64.888	25.236	-9.112	74.000	39.652	PK
4			5470.000	63.210	23.556	-10.790	74.000	39.654	PK
5		*	5495.565	98.662	58.960	N/A	N/A	39.703	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 07:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 1	

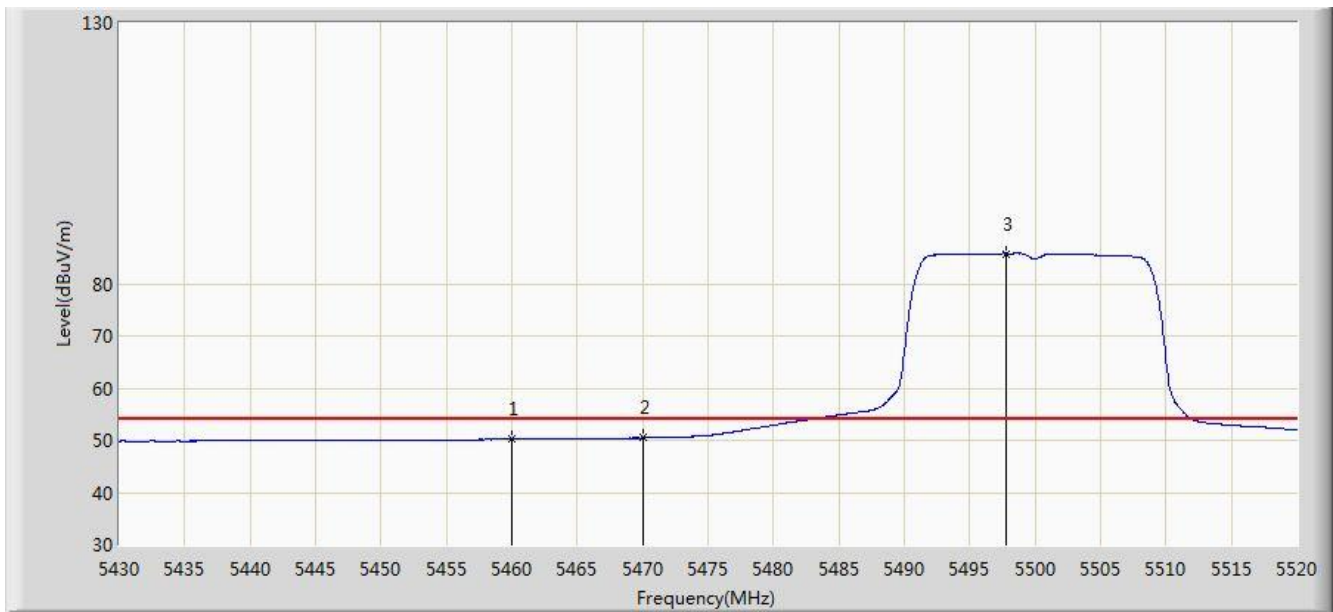


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.188	10.552	-3.812	54.000	39.636	AV
2			5470.000	50.453	10.799	-3.547	54.000	39.654	AV
3		*	5497.815	85.787	46.081	N/A	N/A	39.707	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 07:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 1	

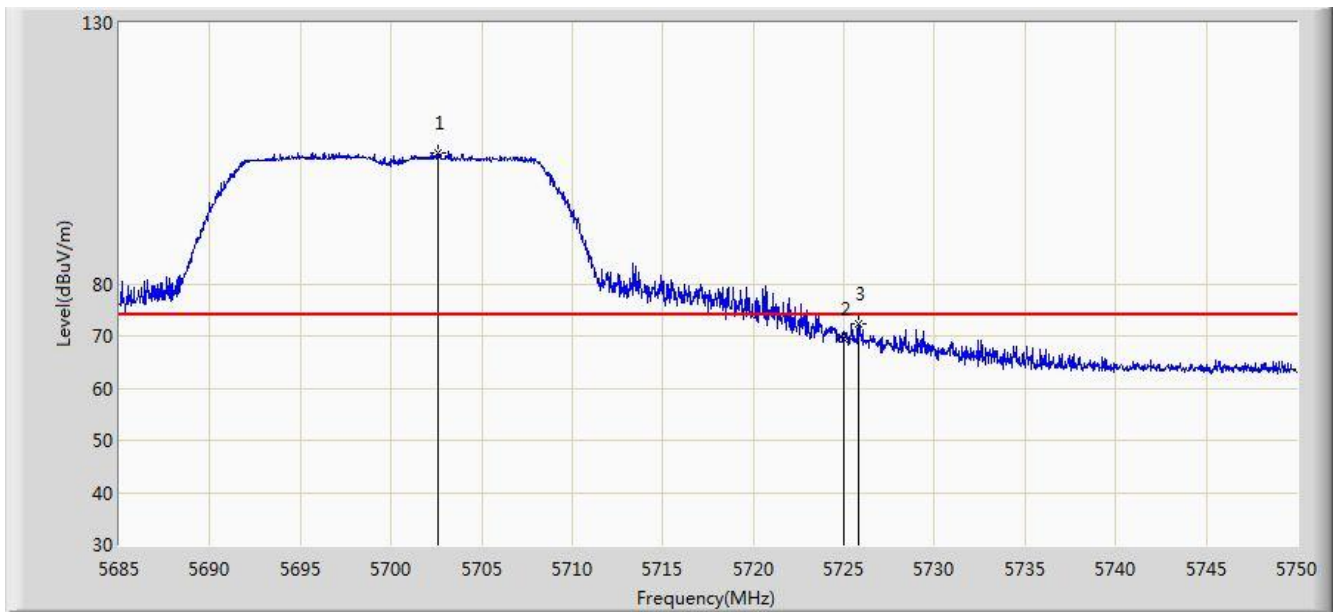


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.583	105.194	65.128	N/A	N/A	40.066	PK
2			5725.000	69.447	29.283	-4.553	74.000	40.164	PK
3			5725.788	72.265	32.097	-1.735	74.000	40.167	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 07:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 1	

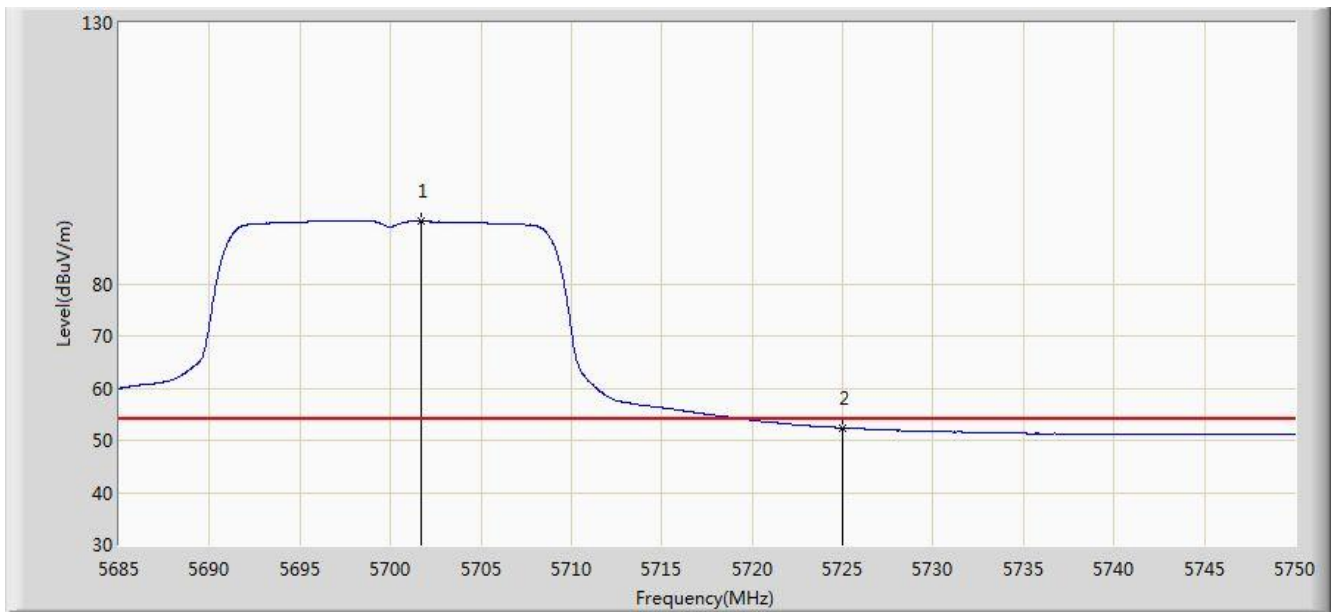


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.672	91.967	51.904	N/A	N/A	40.063	AV
2			5725.000	52.385	12.221	-1.615	54.000	40.164	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 07:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 1	

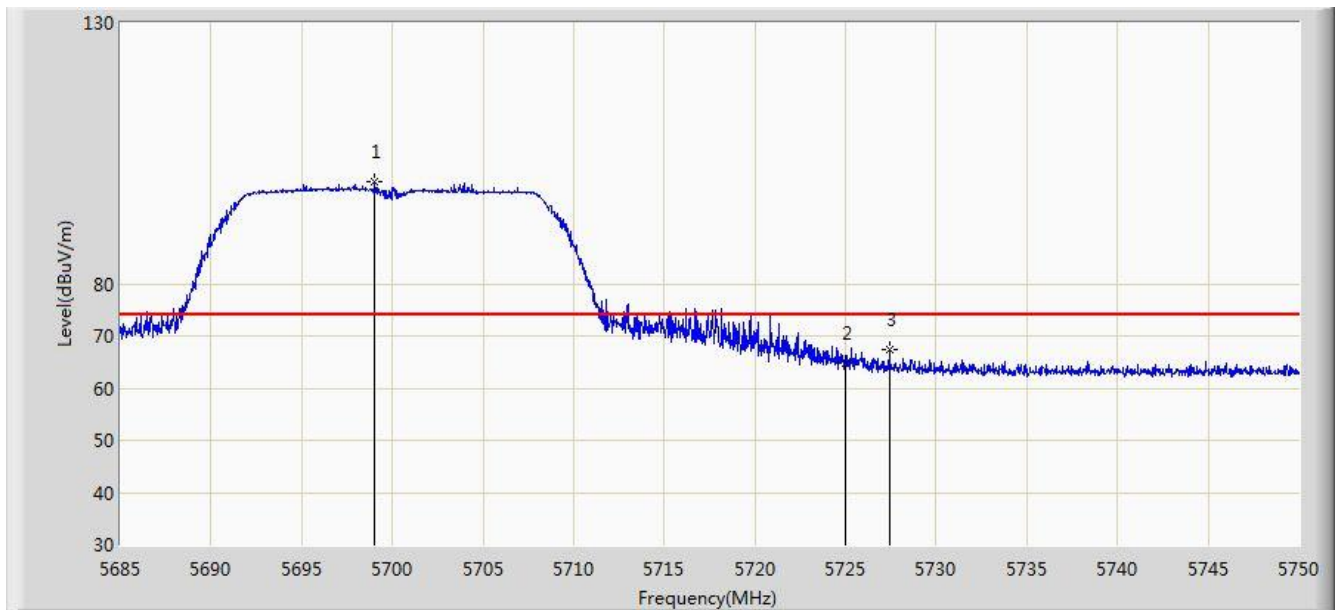


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5699.040	99.427	59.373	N/A	N/A	40.053	PK
2			5725.000	64.757	24.593	-9.243	74.000	40.164	PK
3			5727.445	67.329	27.154	-6.671	74.000	40.175	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 07:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 1	

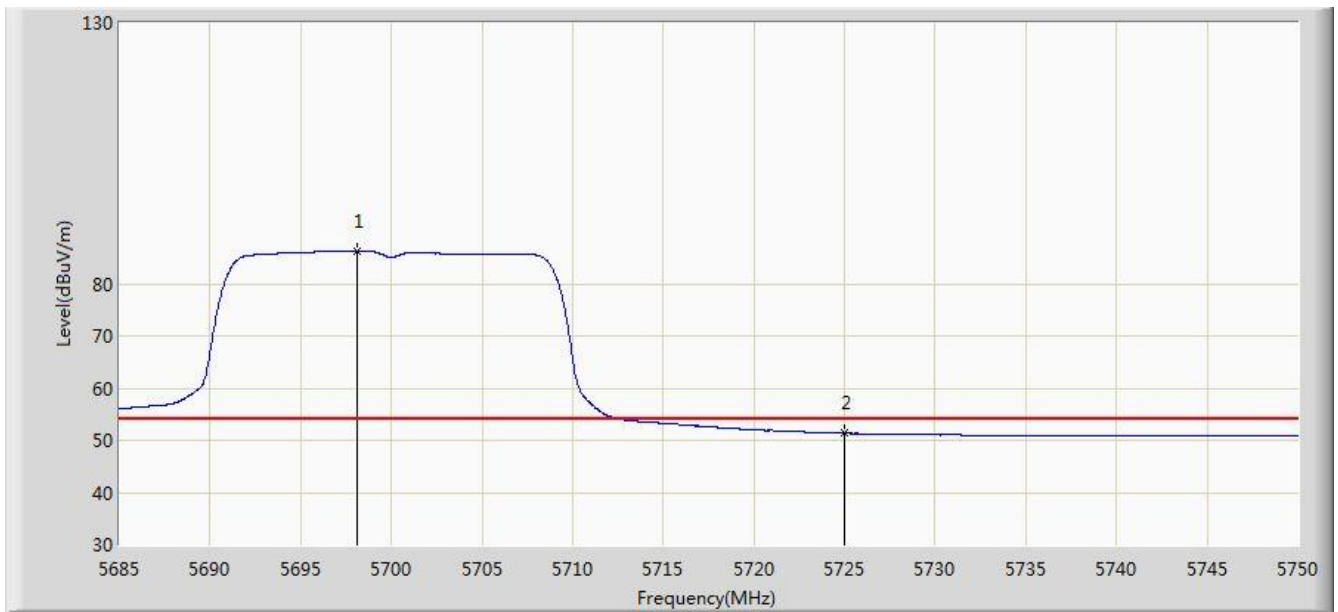


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.098	86.234	46.184	N/A	N/A	40.050	AV
2			5725.000	51.404	11.240	-2.596	54.000	40.164	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 07:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 1	

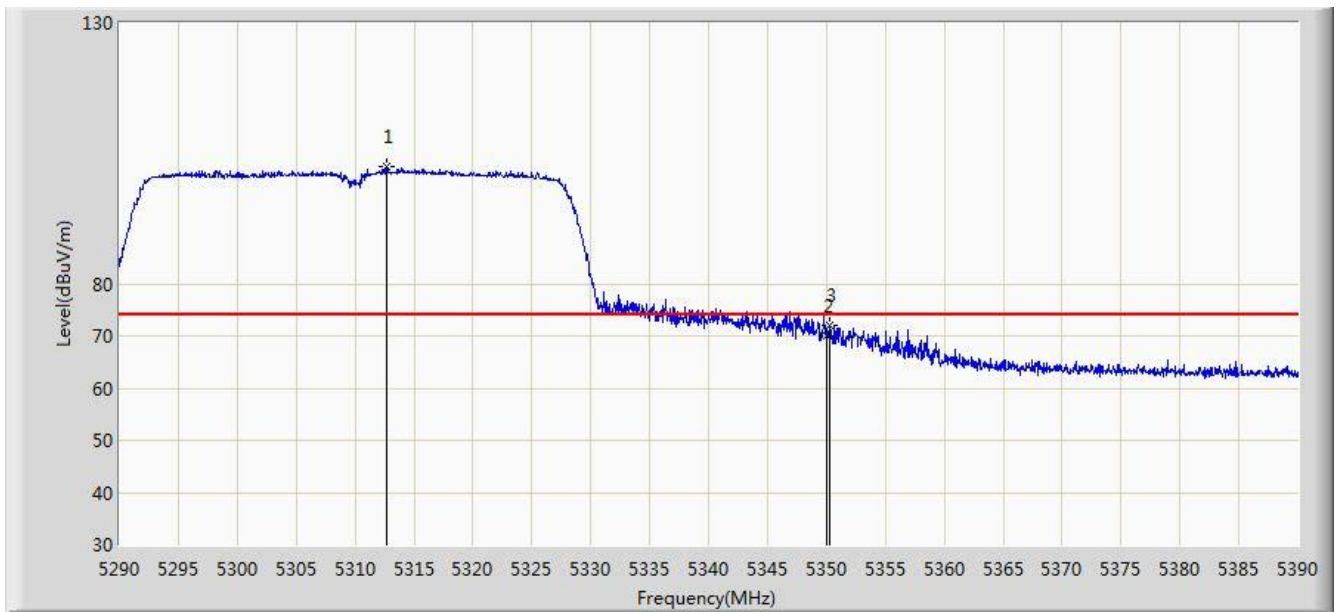


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.650	102.387	63.162	N/A	N/A	39.225	PK
2			5350.000	69.927	30.602	-4.073	74.000	39.324	PK
3			5350.300	72.152	32.827	-1.848	74.000	39.326	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 07:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 1	

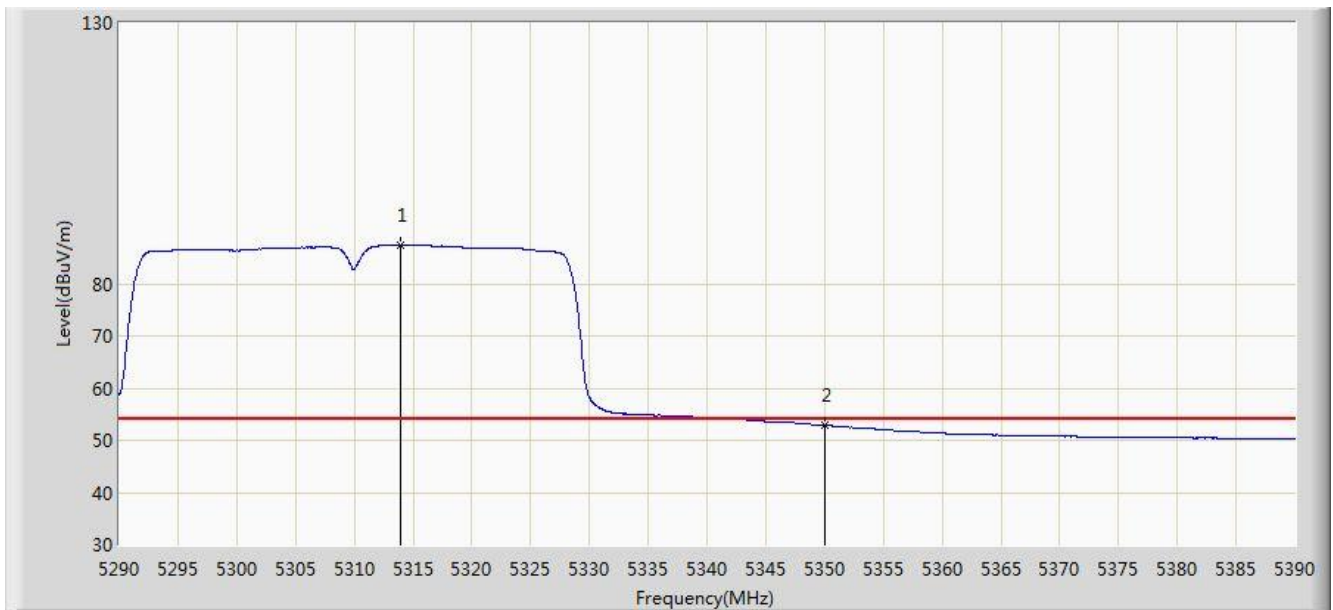


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.900	87.356	48.128	N/A	N/A	39.228	AV
2			5350.000	52.867	13.542	-1.133	54.000	39.324	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 07:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 1	

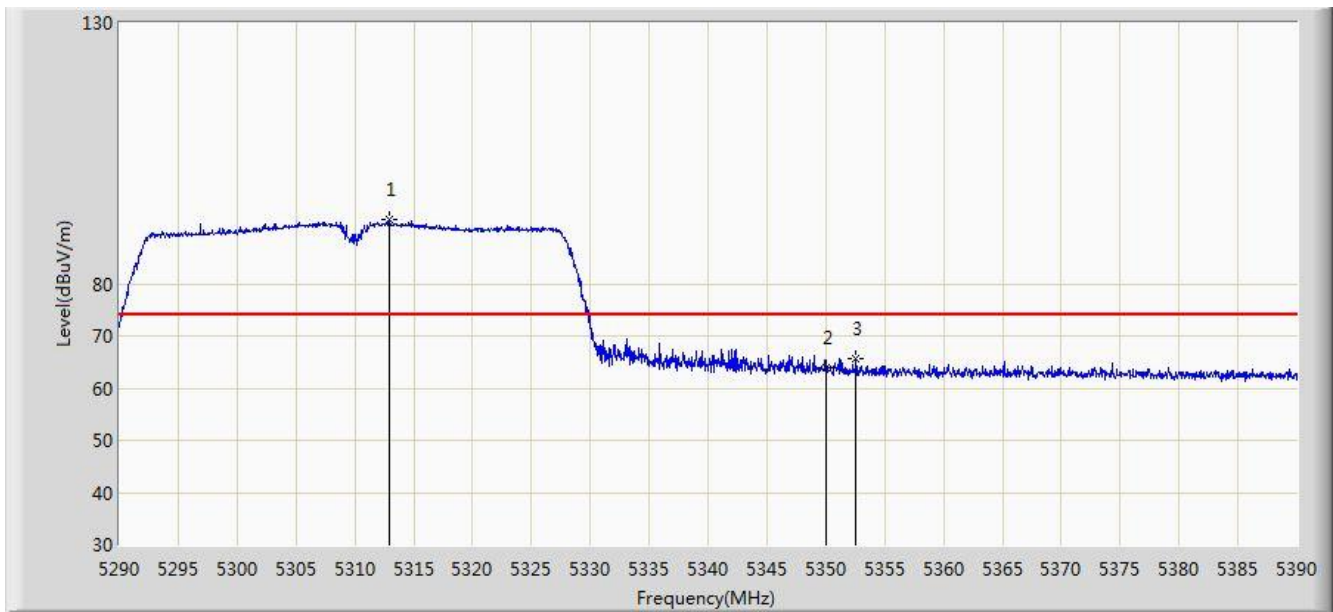


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.900	92.370	53.144	N/A	N/A	39.226	PK
2			5350.000	64.039	24.714	-9.961	74.000	39.324	PK
3			5352.550	65.559	26.228	-8.441	74.000	39.331	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 07:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 1	

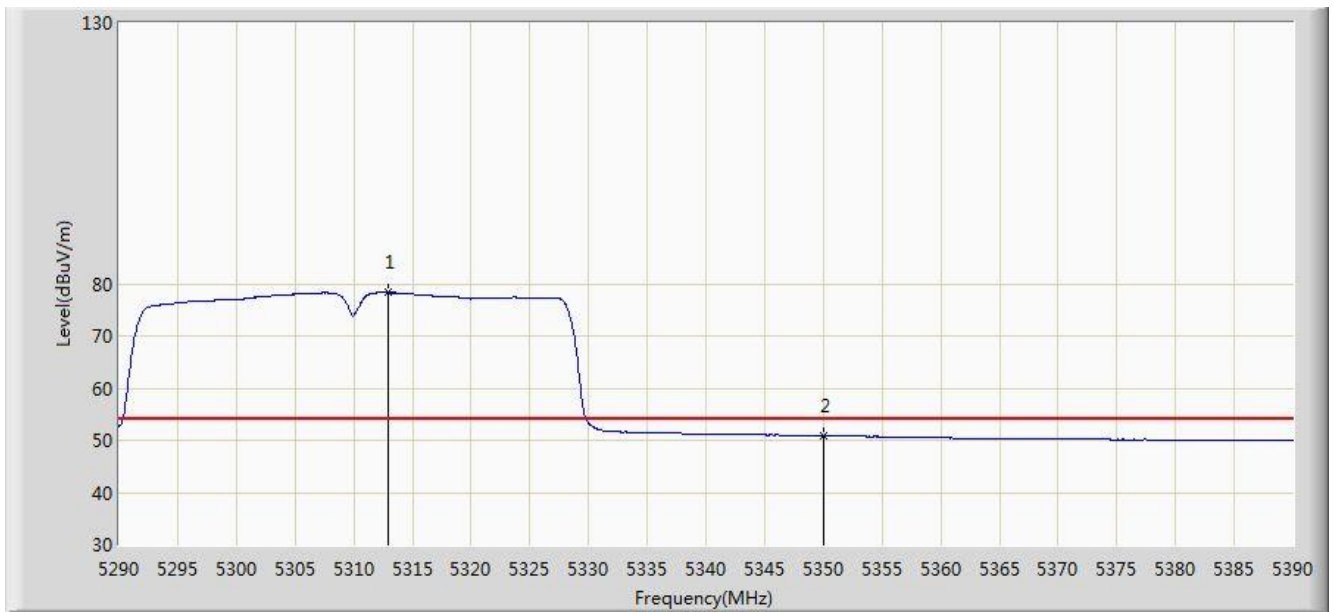


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.950	78.319	39.093	N/A	N/A	39.226	AV
2			5350.000	50.859	11.534	-3.141	54.000	39.324	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 07:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 1	

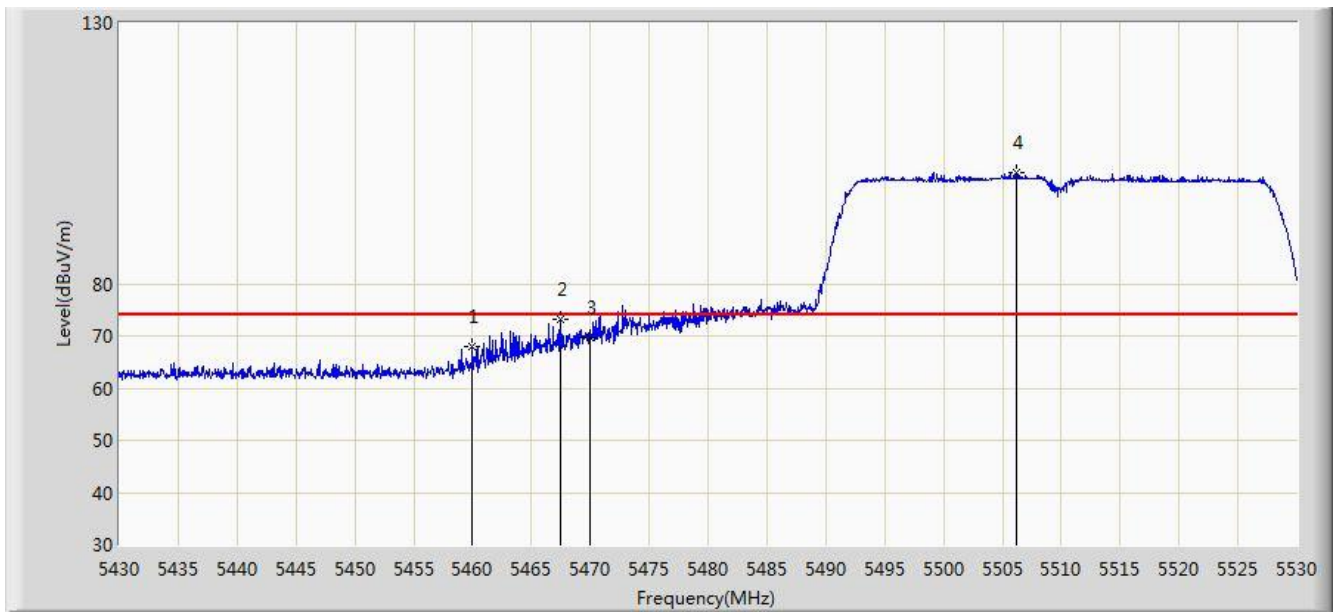


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	68.067	28.431	-5.933	74.000	39.636	PK
2			5467.450	73.183	33.533	-0.817	74.000	39.649	PK
3			5470.000	69.754	30.100	-4.246	74.000	39.654	PK
4		*	5506.150	101.297	61.575	N/A	N/A	39.721	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 07:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 1	

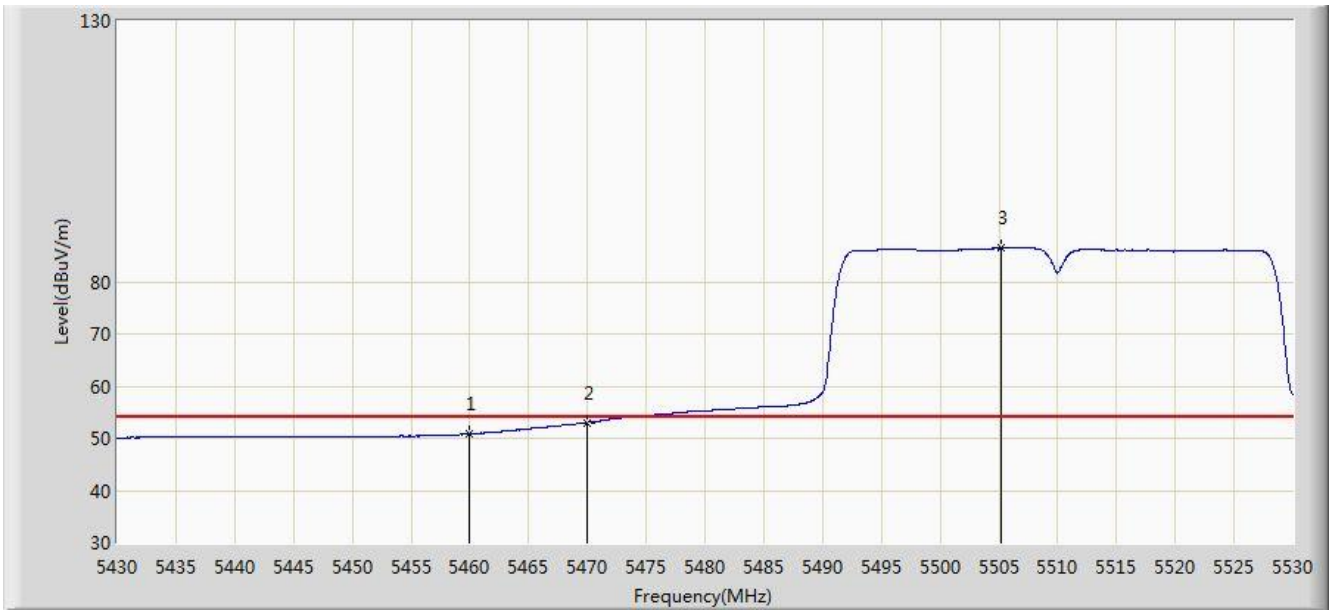


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.839	11.203	-3.161	54.000	39.636	AV
2			5470.000	53.040	13.386	-0.960	54.000	39.654	AV
3		*	5505.200	86.394	46.674	N/A	N/A	39.720	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 07:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 1	

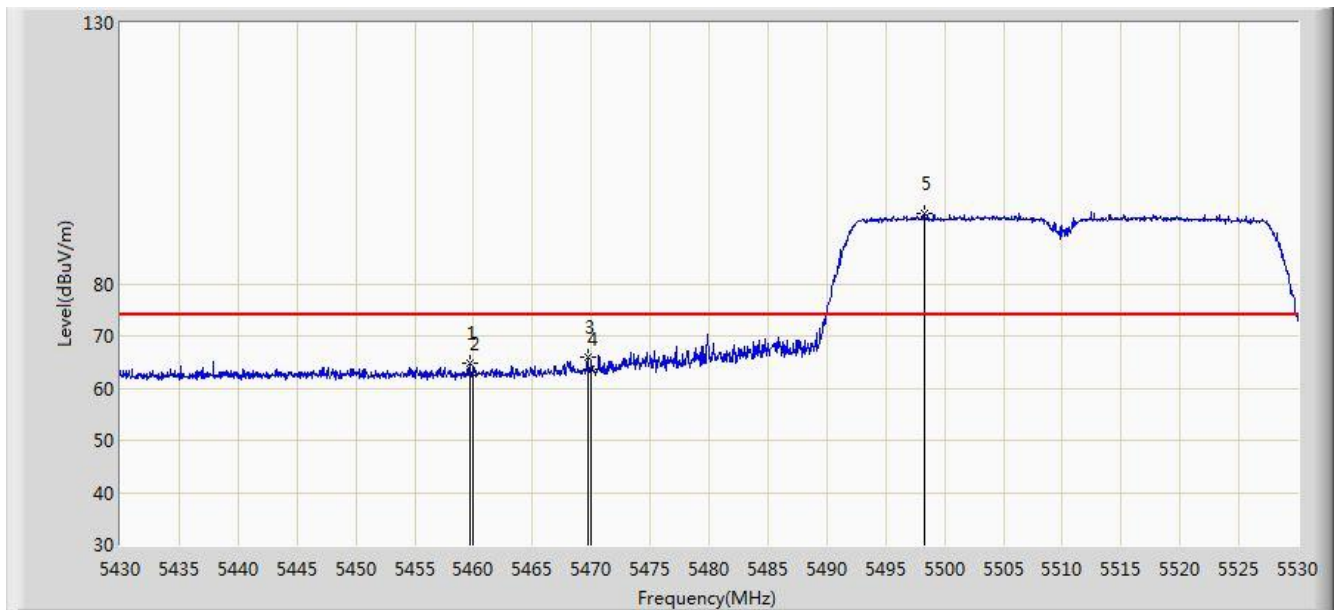


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.700	64.647	25.012	-9.353	74.000	39.636	PK
2			5460.000	62.687	23.051	-11.313	74.000	39.636	PK
3			5469.700	66.044	26.390	-7.956	74.000	39.654	PK
4			5470.000	63.546	23.892	-10.454	74.000	39.654	PK
5		*	5498.300	93.608	53.901	N/A	N/A	39.707	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 07:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 1	

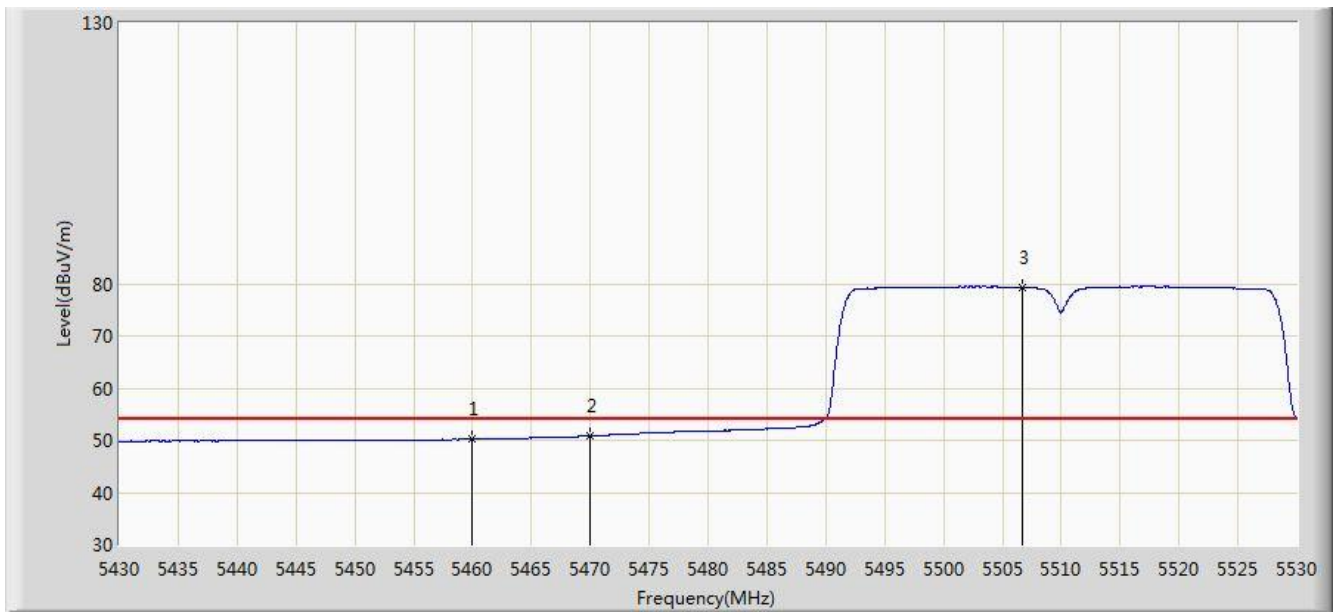


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.191	10.555	-3.809	54.000	39.636	AV
2			5470.000	50.838	11.184	-3.162	54.000	39.654	AV
3		*	5506.750	79.262	39.539	N/A	N/A	39.723	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 07:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 1	

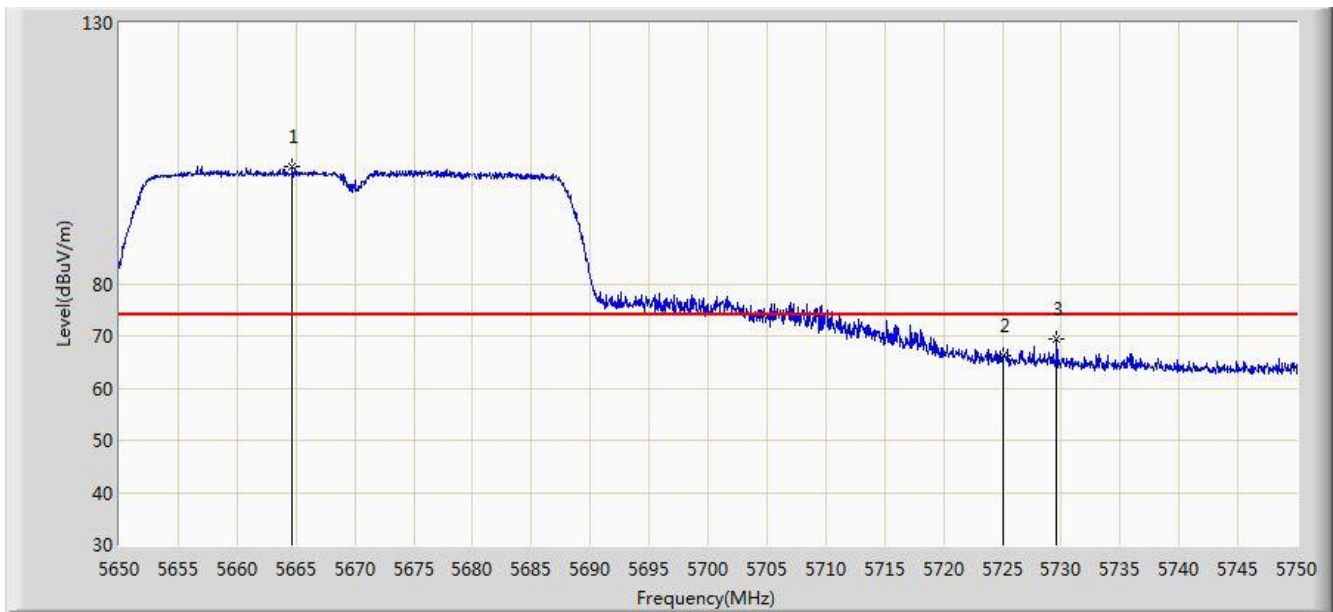


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5664.650	102.413	62.451	N/A	N/A	39.963	PK
2			5725.000	66.271	26.107	-7.729	74.000	40.164	PK
3			5729.600	69.338	29.153	-4.662	74.000	40.186	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 07:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 1	

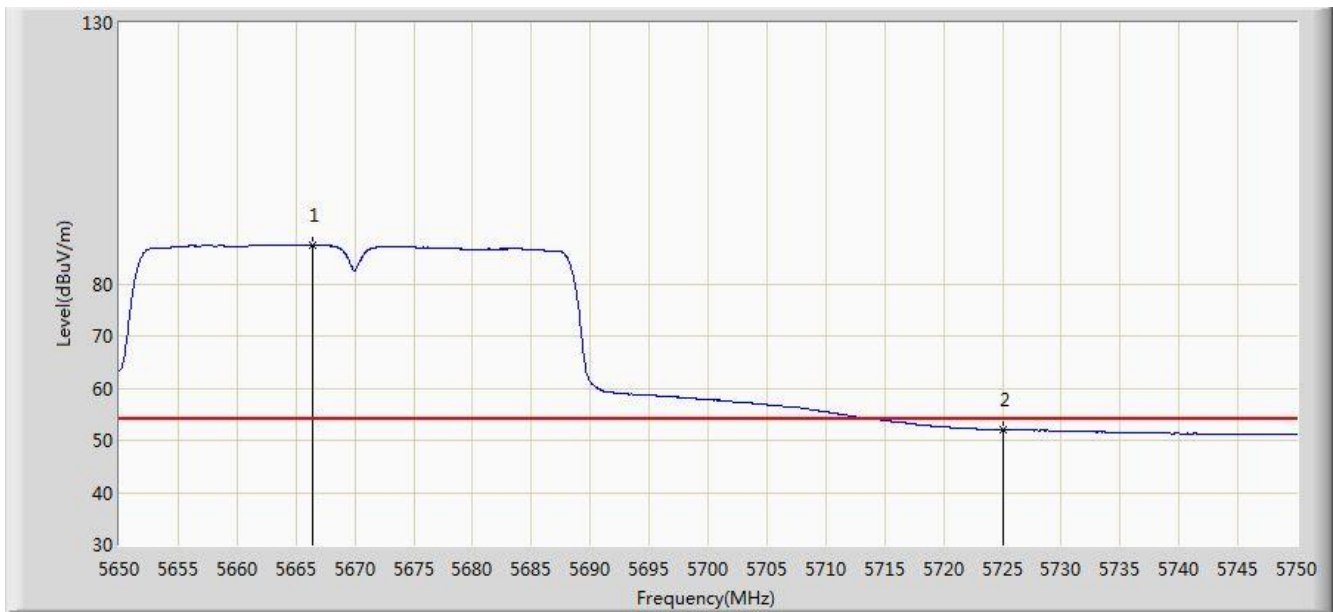


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5666.450	87.328	47.362	N/A	N/A	39.966	AV
2			5725.000	52.014	11.850	-1.986	54.000	40.164	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 07:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 1	

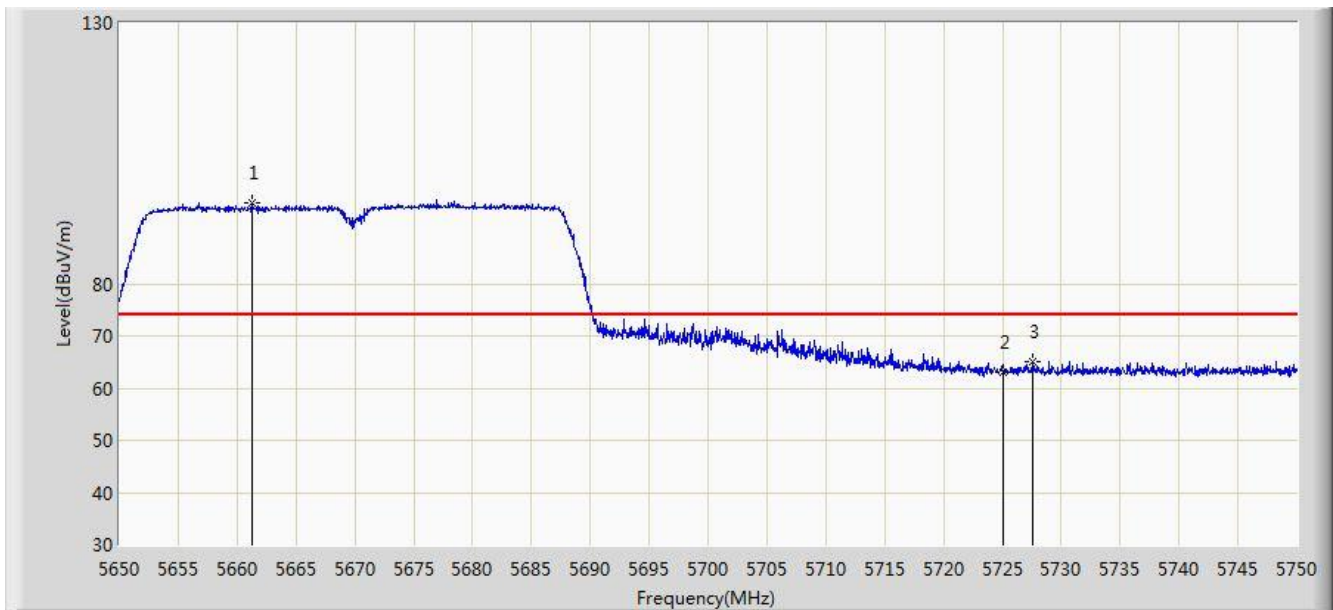


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5661.300	95.600	55.646	N/A	N/A	39.954	PK
2			5725.000	63.025	22.861	-10.975	74.000	40.164	PK
3			5727.550	65.023	24.847	-8.977	74.000	40.176	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 07:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 1	

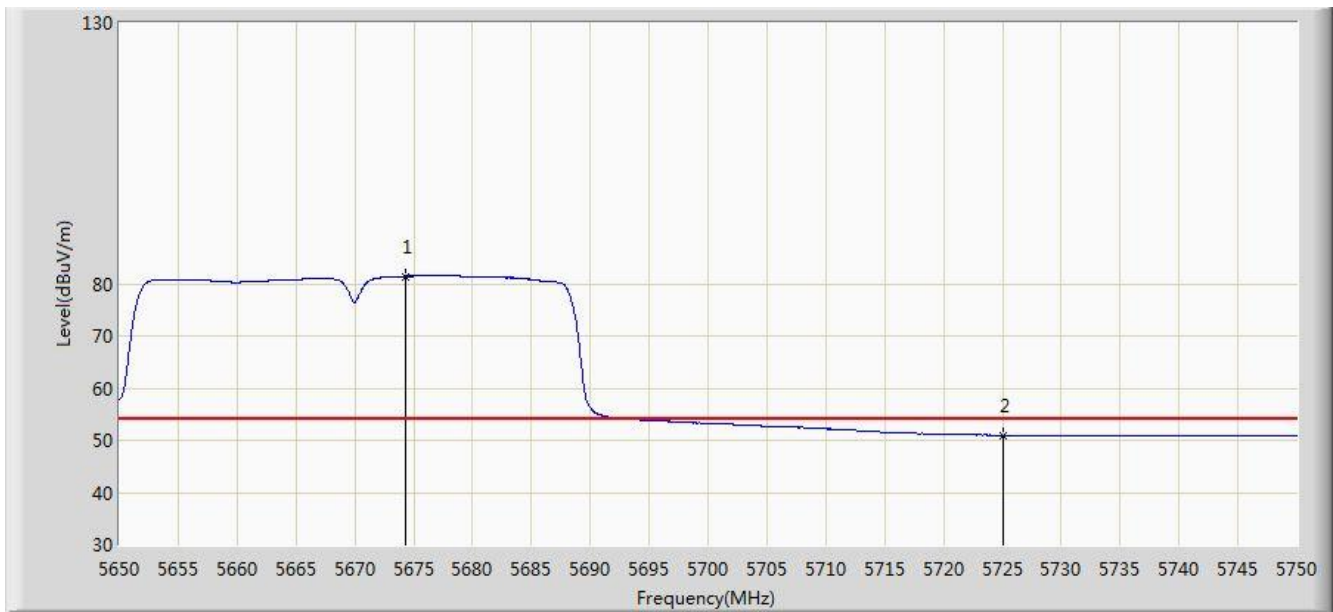


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5674.250	81.418	41.433	N/A	N/A	39.986	AV
2			5725.000	50.905	10.741	-3.095	54.000	40.164	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 1	

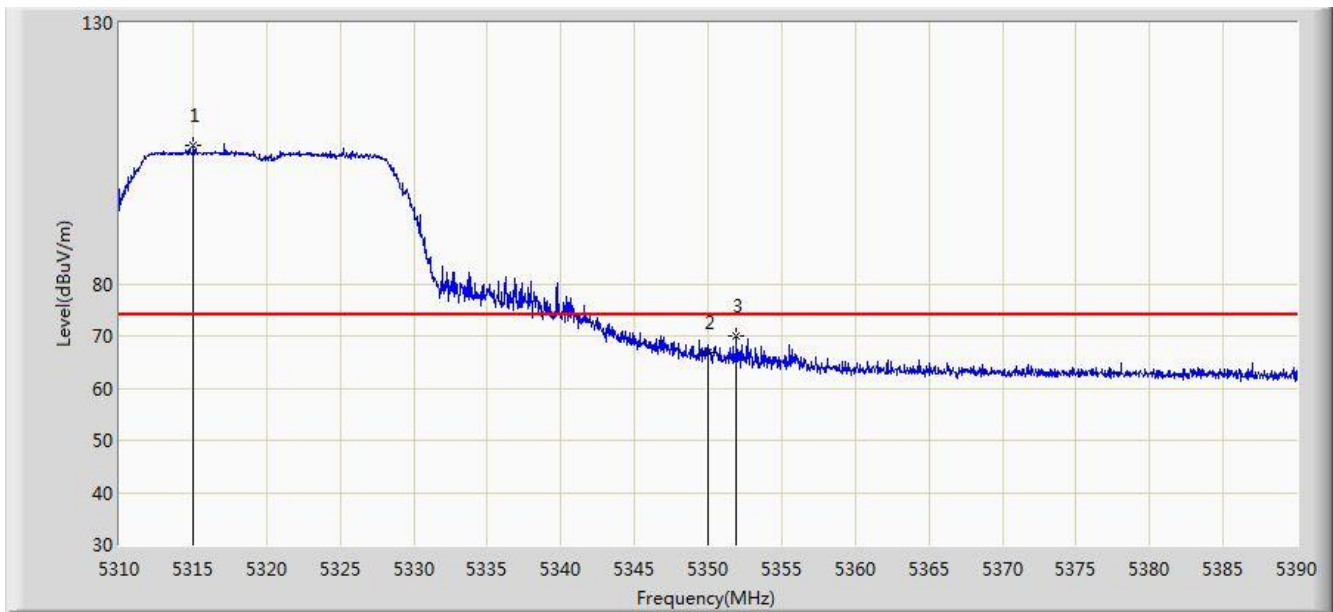


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.040	106.596	67.365	N/A	N/A	39.231	PK
2			5350.000	66.732	27.407	-7.268	74.000	39.324	PK
3			5351.920	69.927	30.597	-4.073	74.000	39.330	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 1	

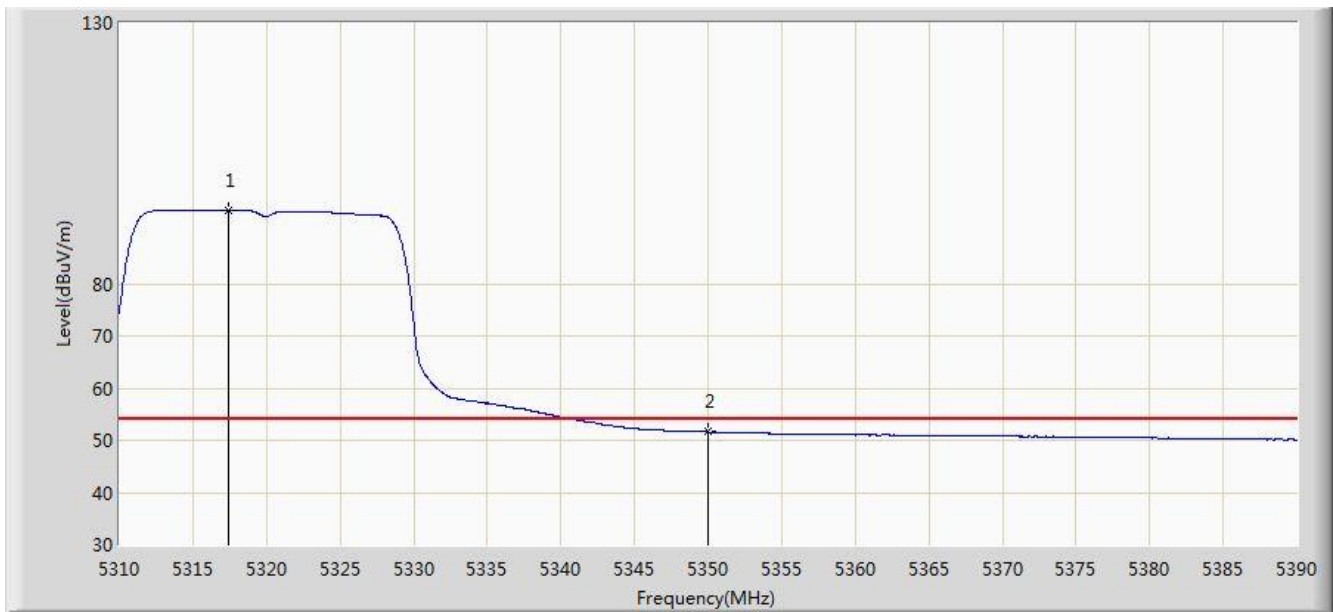


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.440	94.093	54.855	N/A	N/A	39.238	AV
2			5350.000	51.596	12.271	-2.404	54.000	39.324	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 1	

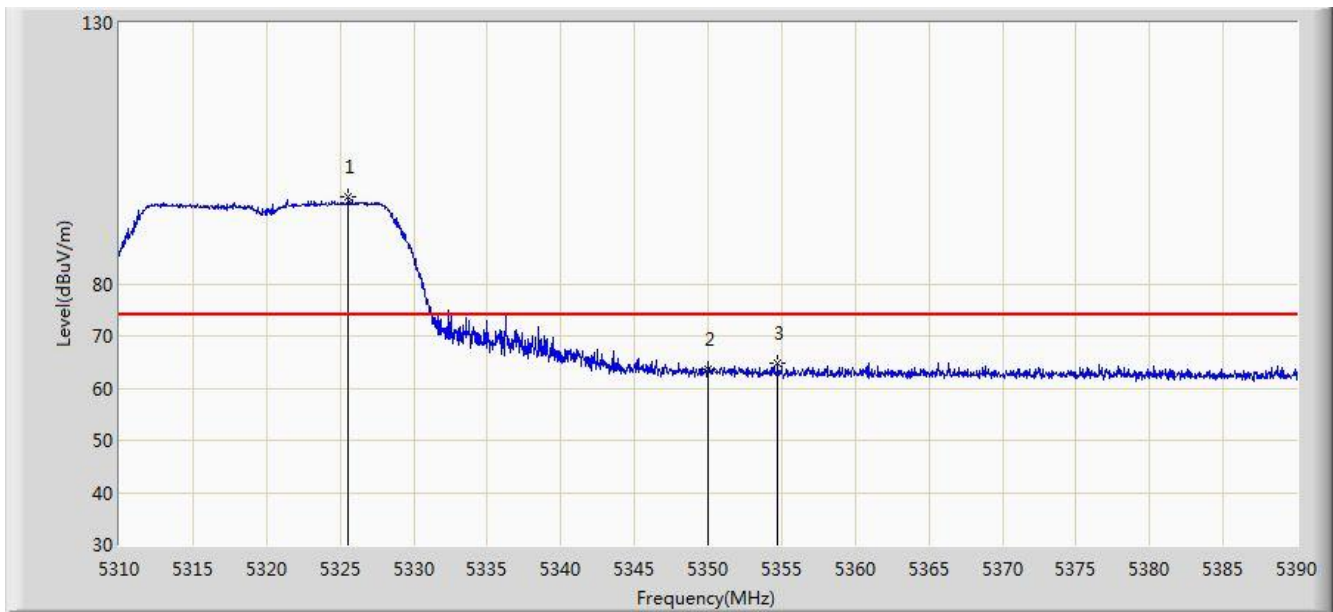


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5325.560	96.742	57.482	N/A	N/A	39.260	PK
2			5350.000	63.765	24.440	-10.235	74.000	39.324	PK
3			5354.720	64.770	25.433	-9.230	74.000	39.337	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 1	

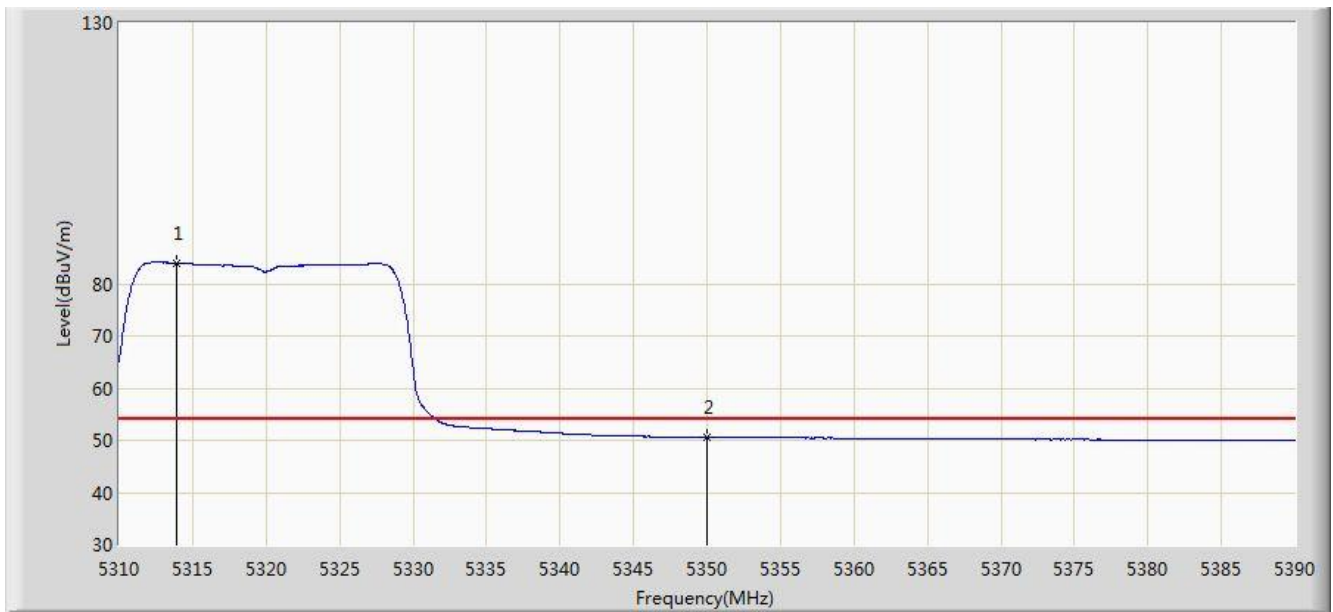


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.920	83.908	44.680	N/A	N/A	39.228	AV
2			5350.000	50.586	11.261	-3.414	54.000	39.324	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 1	

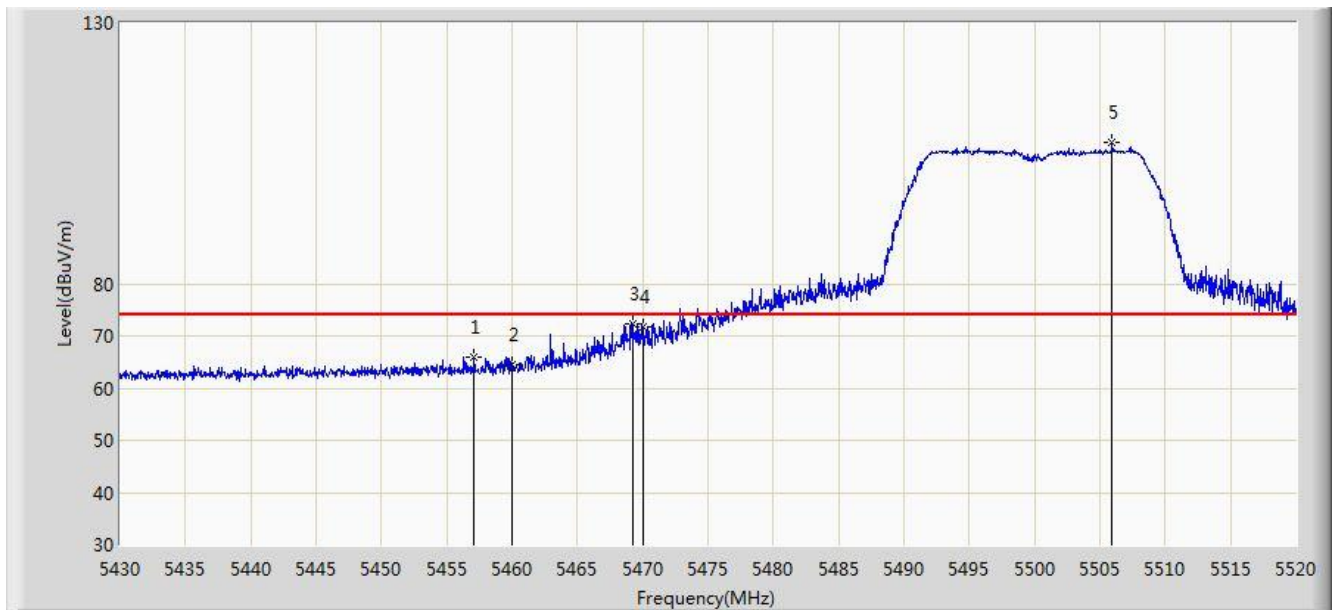


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.090	65.862	26.231	-8.138	74.000	39.631	PK
2			5460.000	64.393	24.757	-9.607	74.000	39.636	PK
3			5469.240	72.344	32.691	-1.656	74.000	39.653	PK
4			5470.000	71.753	32.099	-2.247	74.000	39.654	PK
5		*	5505.915	107.018	67.297	N/A	N/A	39.721	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 1	

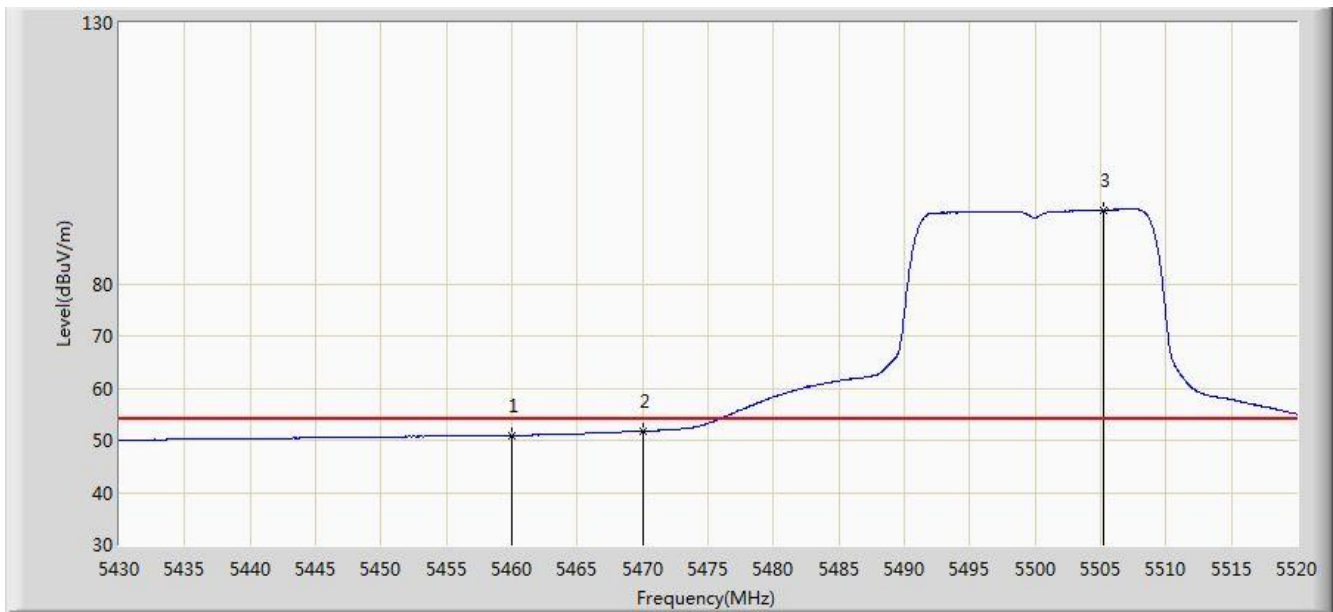


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.960	11.324	-3.040	54.000	39.636	AV
2			5470.000	51.752	12.098	-2.248	54.000	39.654	AV
3		*	5505.240	94.144	54.424	N/A	N/A	39.720	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 1	

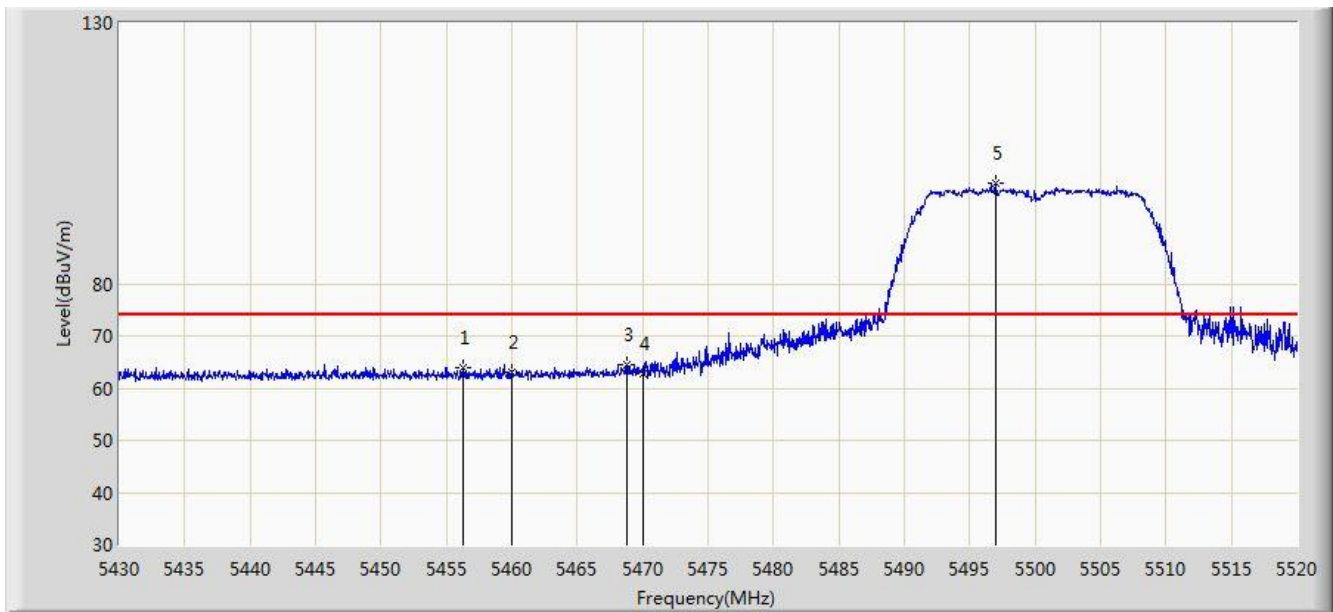


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.235	64.021	24.392	-9.979	74.000	39.629	PK
2			5460.000	63.094	23.458	-10.906	74.000	39.636	PK
3			5468.745	64.369	24.717	-9.631	74.000	39.652	PK
4			5470.000	62.875	23.221	-11.125	74.000	39.654	PK
5		*	5497.005	99.185	59.480	N/A	N/A	39.705	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 1	

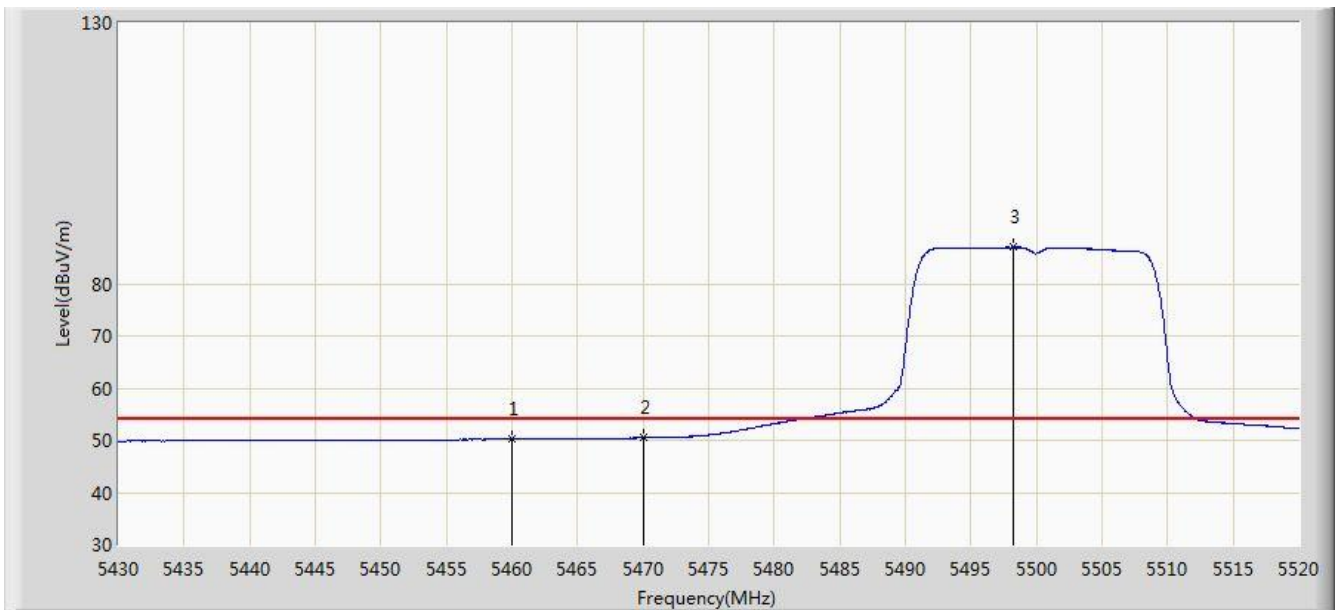


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.193	10.557	-3.807	54.000	39.636	AV
2			5470.000	50.488	10.834	-3.512	54.000	39.654	AV
3		*	5498.220	87.004	47.297	N/A	N/A	39.707	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 1	

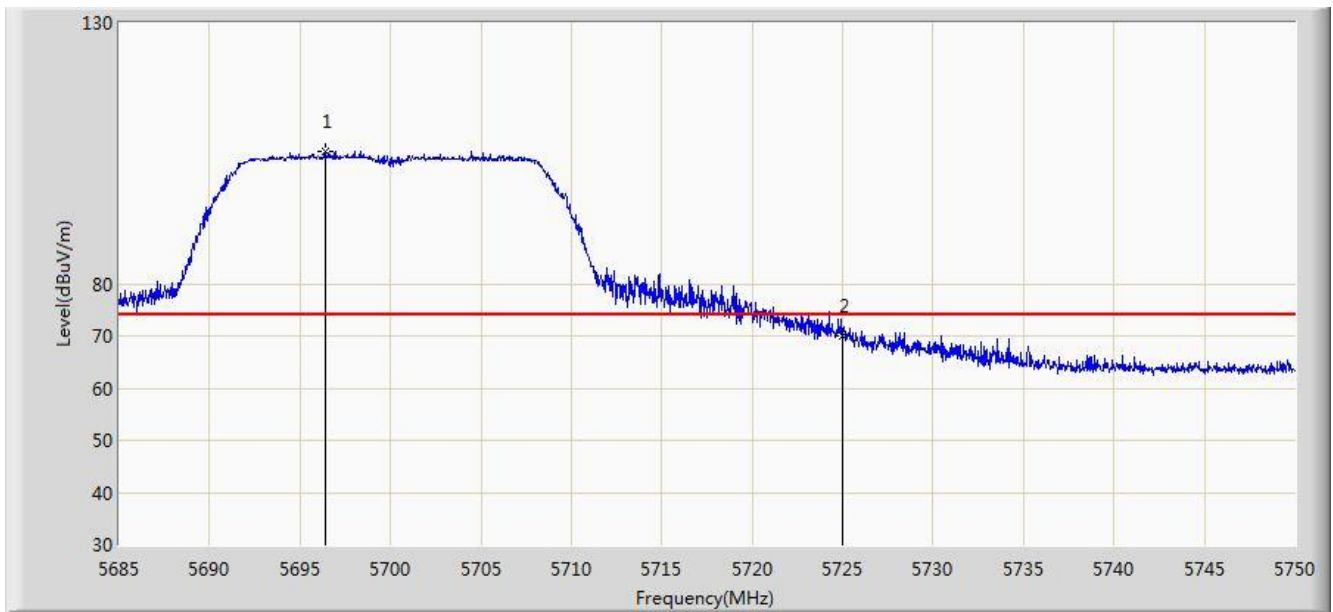


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.375	105.458	65.414	N/A	N/A	40.044	PK
2			5725.000	70.111	29.947	-3.889	74.000	40.164	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 1	

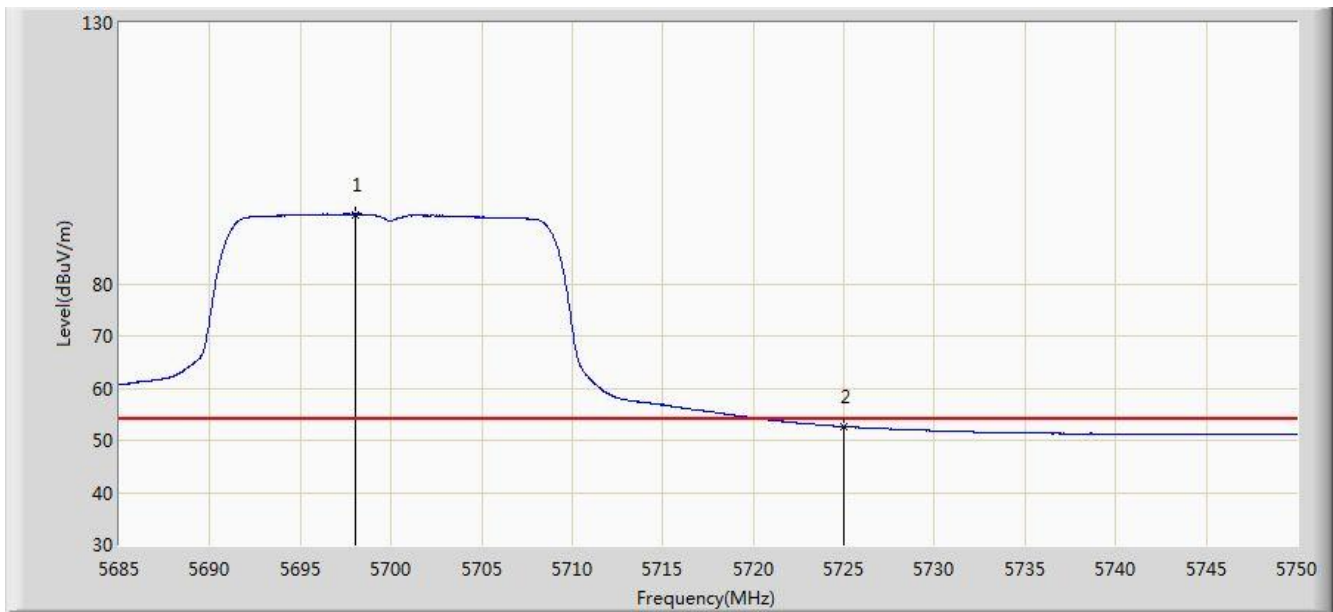


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.000	93.317	53.267	N/A	N/A	40.050	AV
2			5725.000	52.596	12.432	-1.404	54.000	40.164	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 1	

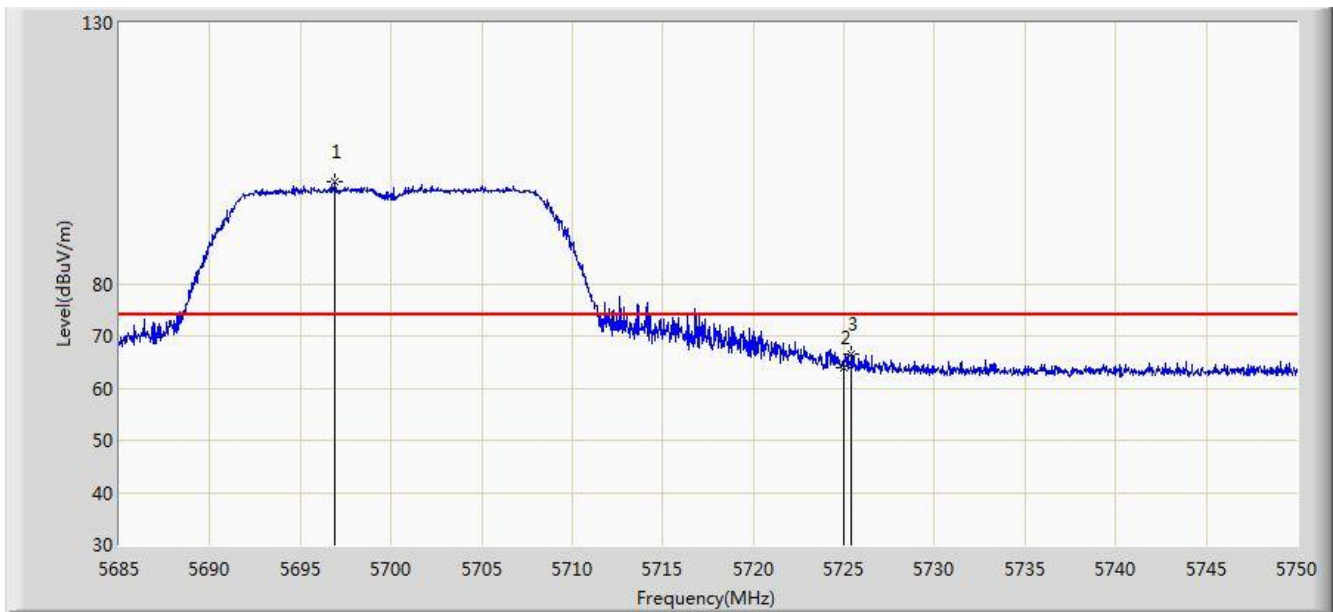


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.928	99.472	59.426	N/A	N/A	40.046	PK
2			5725.000	63.853	23.689	-10.147	74.000	40.164	PK
3			5725.397	66.558	26.392	-7.442	74.000	40.166	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 1	

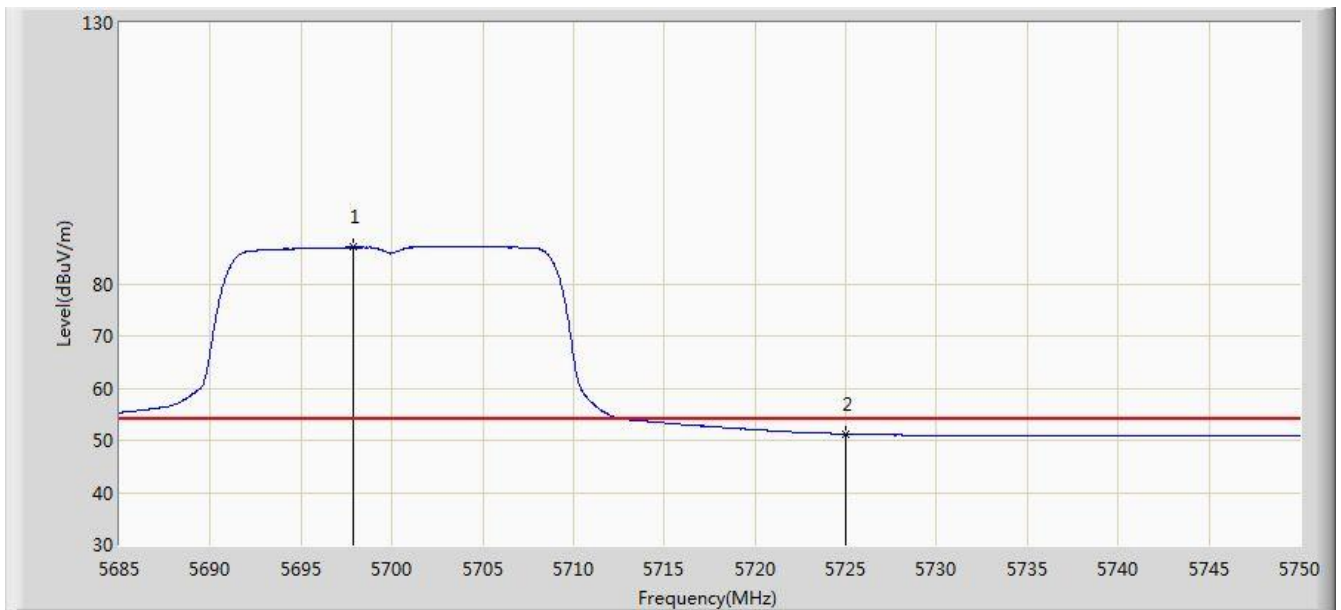


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.870	87.002	46.953	N/A	N/A	40.049	AV
2			5725.000	51.195	11.031	-2.805	54.000	40.164	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 1	

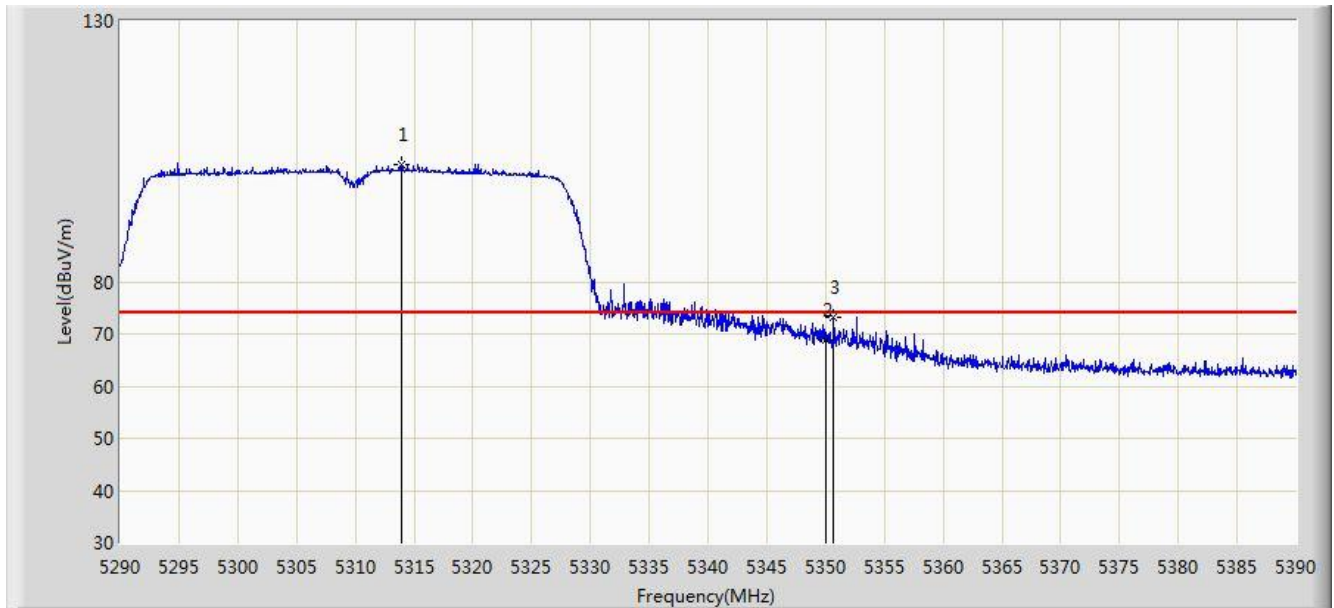


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.950	102.563	63.335	N/A	N/A	39.229	PK
2			5350.000	68.855	29.530	-5.145	74.000	39.324	PK
3			5350.700	73.147	33.820	-0.853	74.000	39.327	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 1	

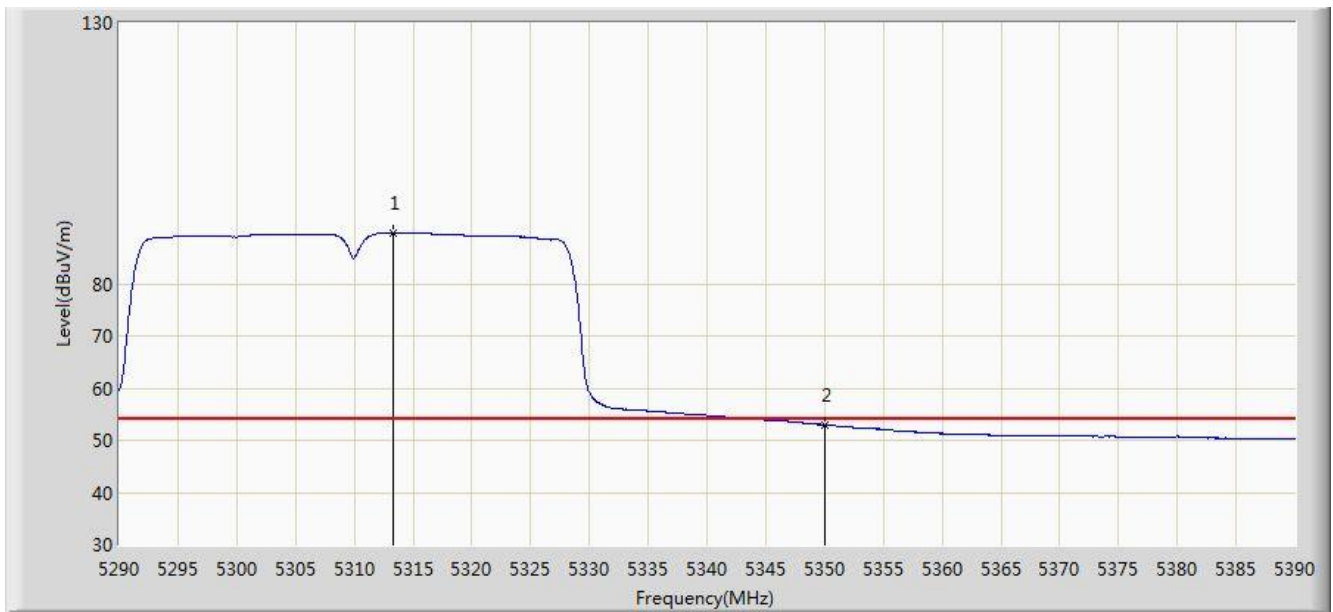


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.300	89.688	50.461	N/A	N/A	39.227	AV
2			5350.000	52.979	13.654	-1.021	54.000	39.324	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 1	

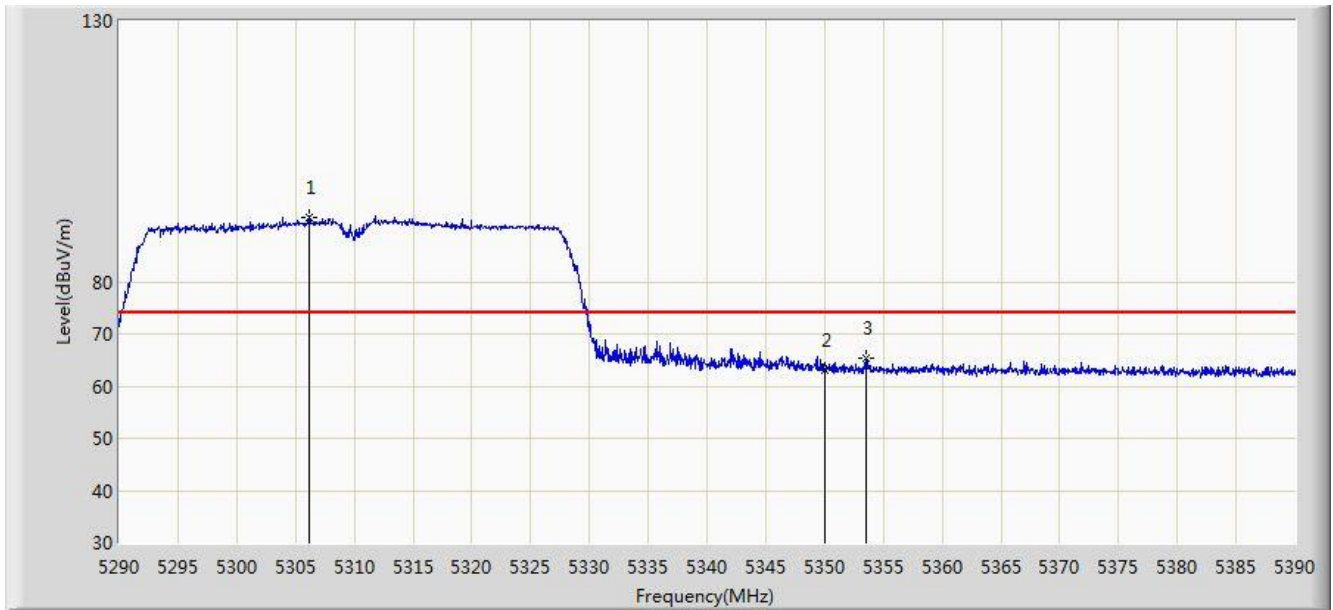


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5306.150	92.340	53.132	N/A	N/A	39.208	PK
2			5350.000	63.151	23.826	-10.849	74.000	39.324	PK
3			5353.500	65.439	26.105	-8.561	74.000	39.334	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz Ant 1	

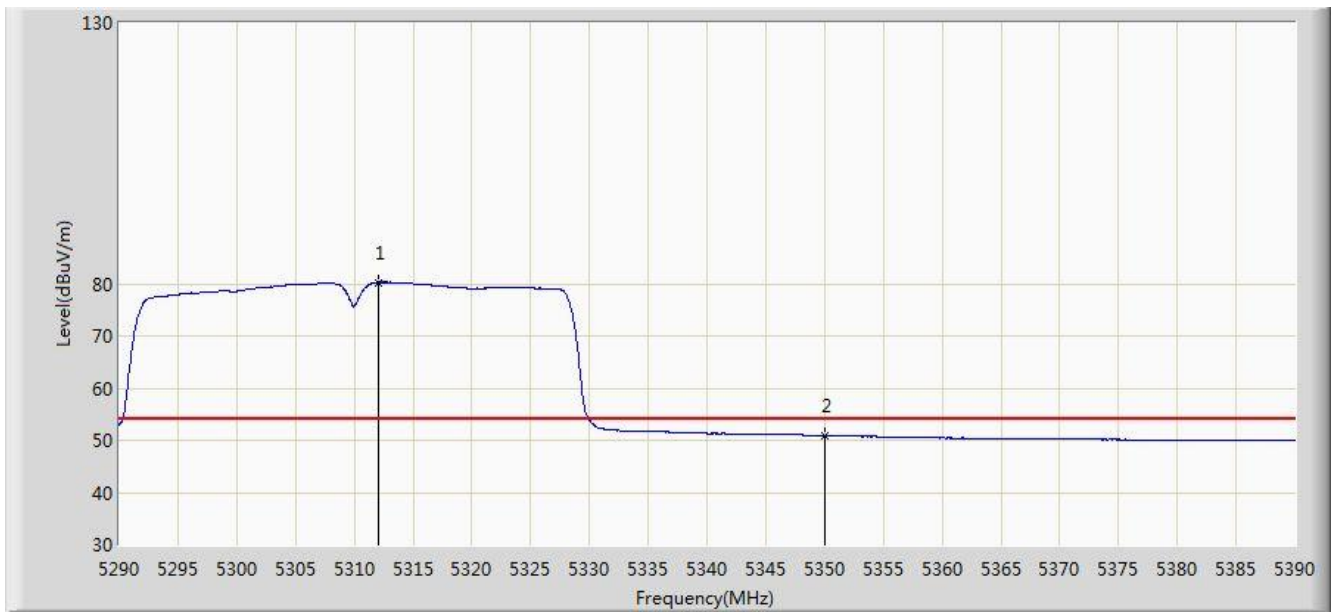


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.050	80.285	41.062	N/A	N/A	39.224	AV
2			5350.000	50.955	11.630	-3.045	54.000	39.324	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 1	

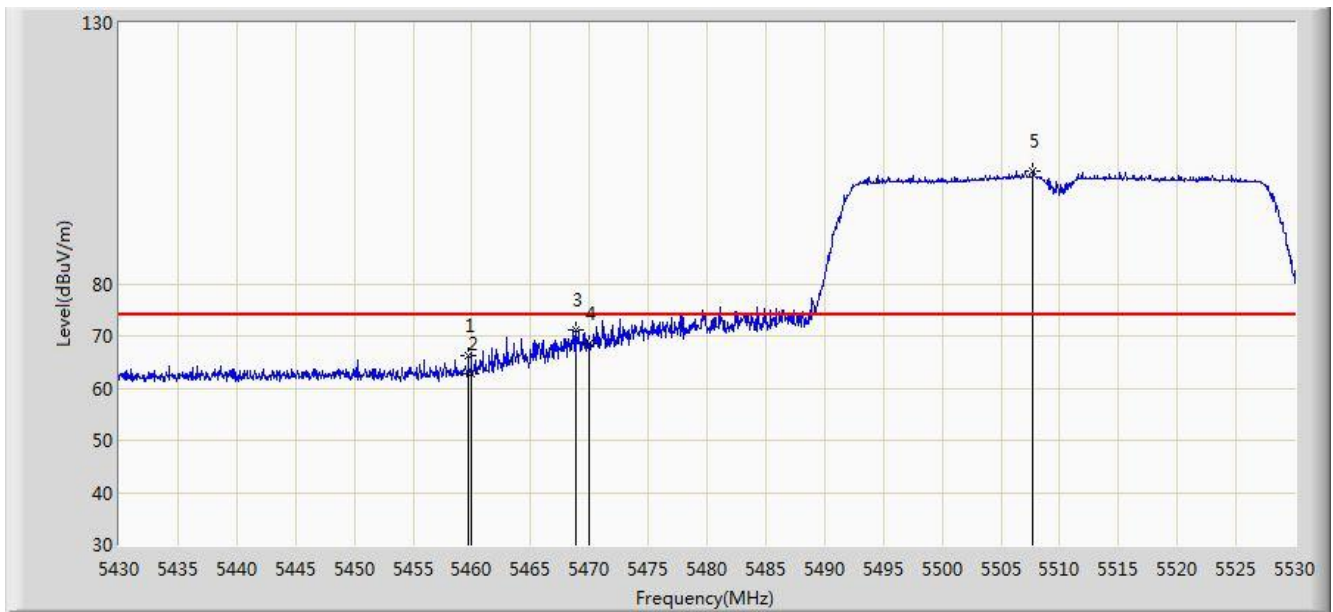


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.700	66.149	26.514	-7.851	74.000	39.636	PK
2			5460.000	62.860	23.224	-11.140	74.000	39.636	PK
3			5468.900	71.276	31.624	-2.724	74.000	39.652	PK
4			5470.000	68.684	29.030	-5.316	74.000	39.654	PK
5		*	5507.750	101.615	61.890	N/A	N/A	39.725	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 1	

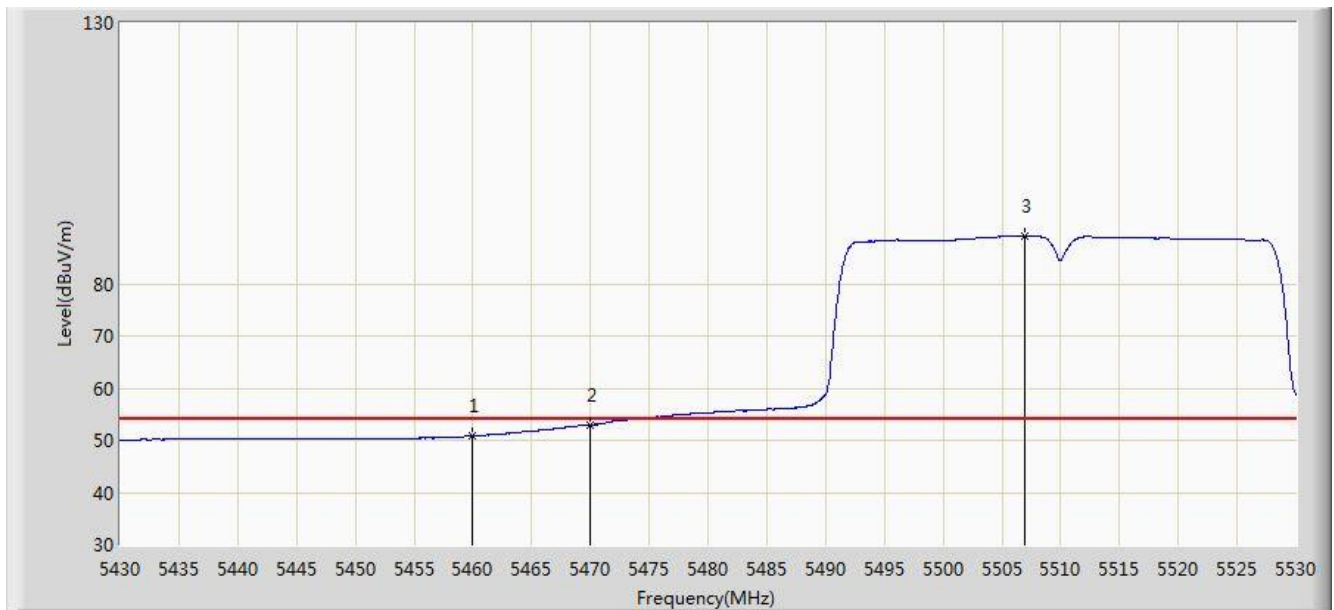


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.787	11.151	-3.213	54.000	39.636	AV
2			5470.000	52.951	13.297	-1.049	54.000	39.654	AV
3		*	5506.950	89.163	49.440	N/A	N/A	39.723	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 1	

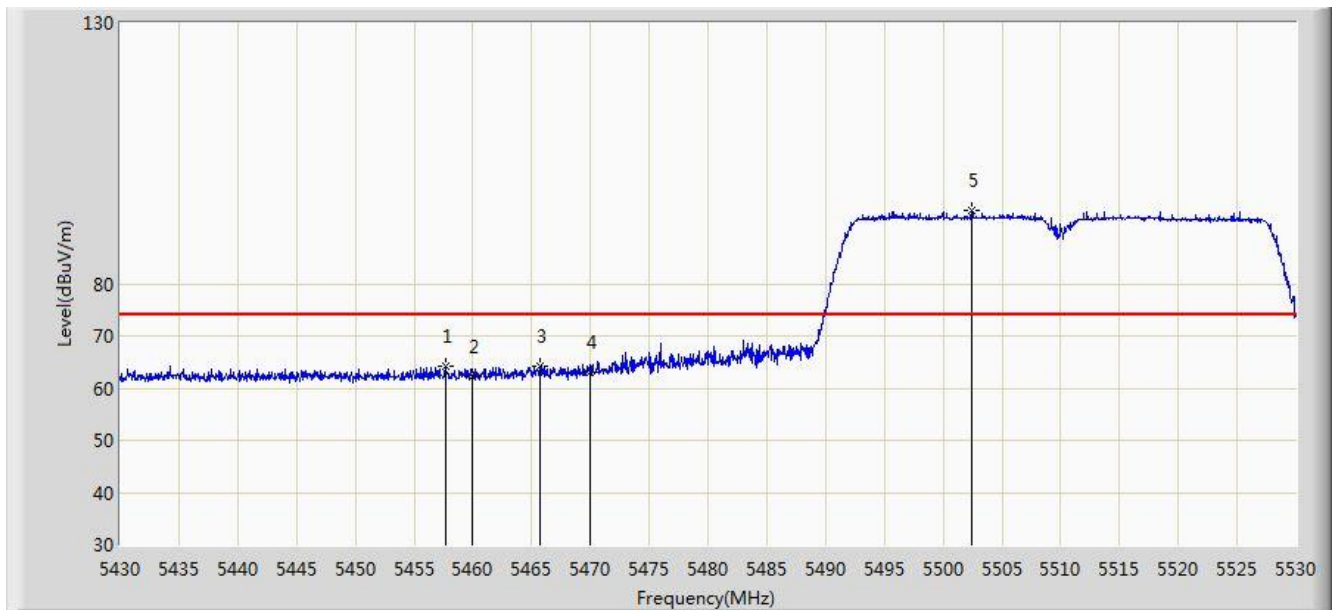


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.650	64.220	24.588	-9.780	74.000	39.632	PK
2			5460.000	62.052	22.416	-11.948	74.000	39.636	PK
3			5465.700	64.338	24.692	-9.662	74.000	39.647	PK
4			5470.000	63.008	23.354	-10.992	74.000	39.654	PK
5		*	5502.400	94.059	54.344	N/A	N/A	39.714	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz Ant 1	

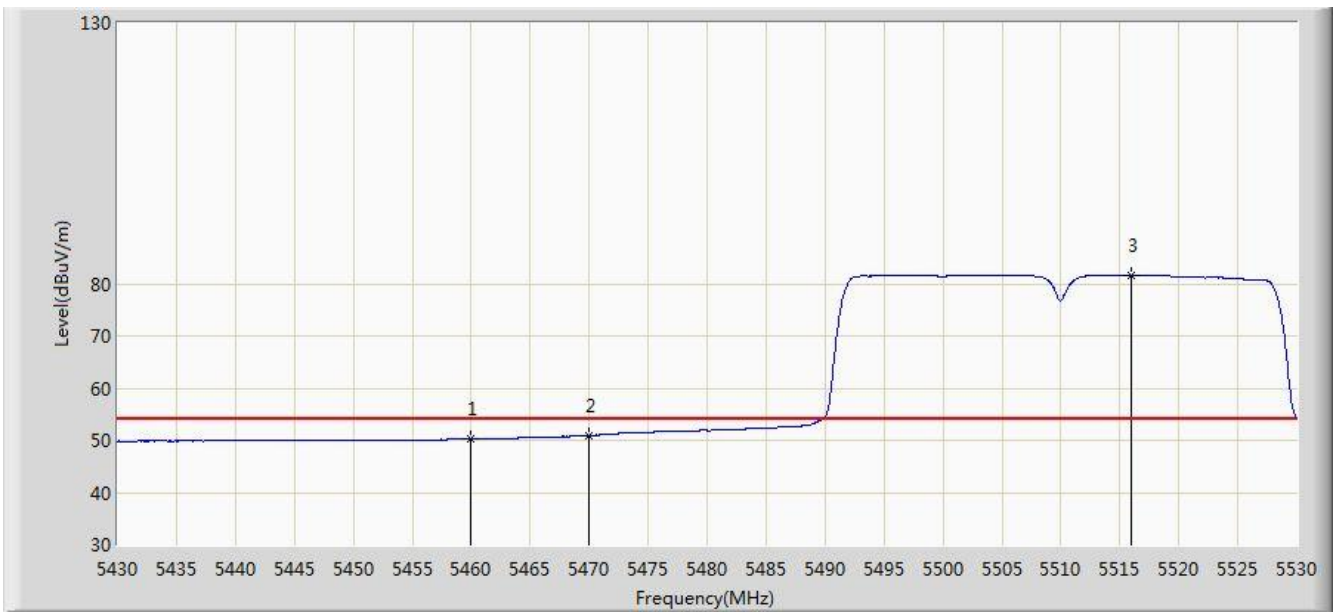


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.195	10.559	-3.805	54.000	39.636	AV
2			5470.000	50.916	11.262	-3.084	54.000	39.654	AV
3		*	5515.950	81.710	41.970	N/A	N/A	39.740	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 1	

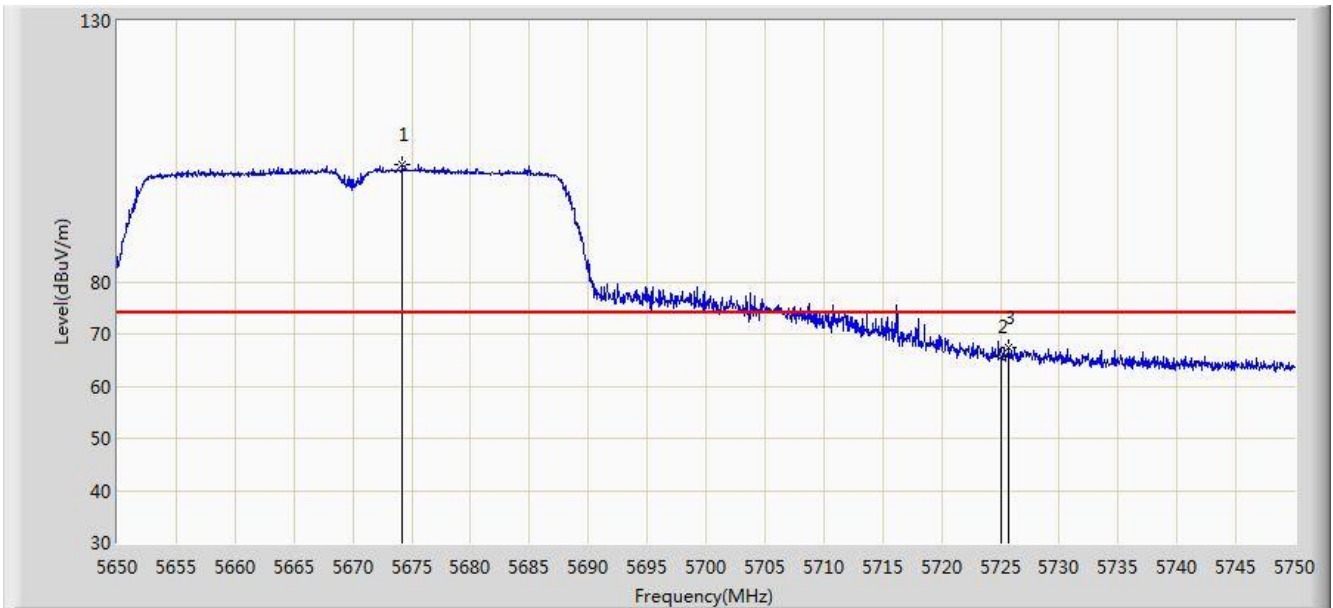


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5674.200	102.444	62.459	N/A	N/A	39.985	PK
2			5725.000	65.757	25.593	-8.243	74.000	40.164	PK
3			5725.750	67.377	27.210	-6.623	74.000	40.167	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 1	

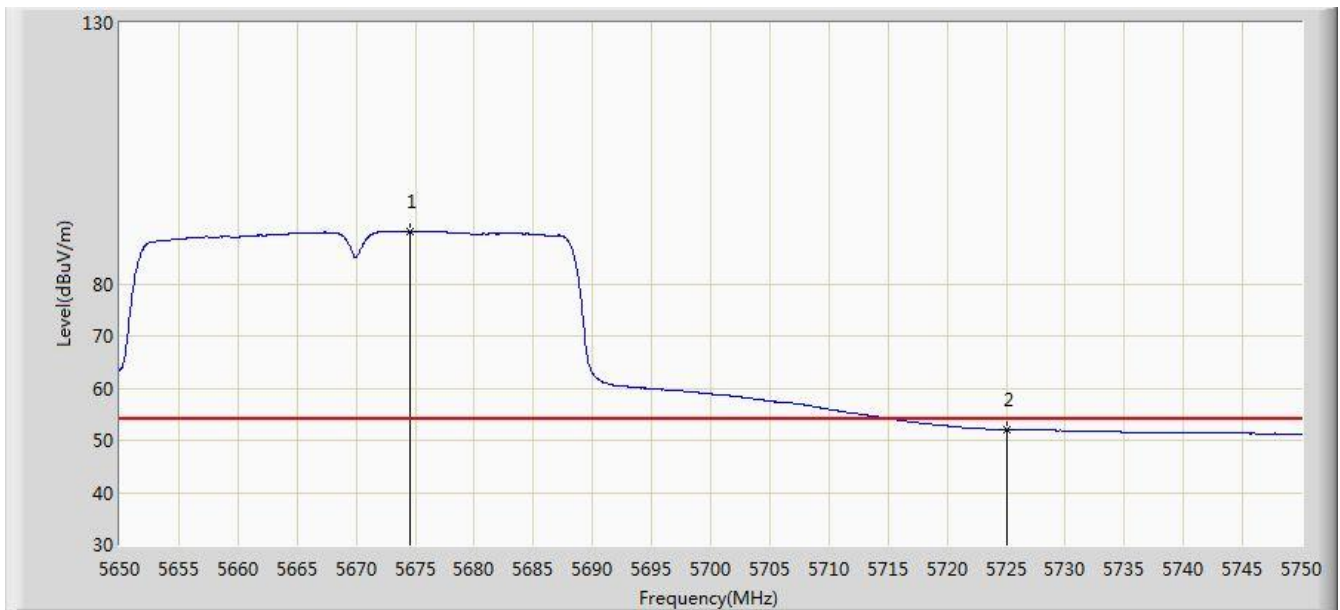


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5674.500	90.093	50.107	N/A	N/A	39.986	AV
2			5725.000	52.108	11.944	-1.892	54.000	40.164	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 1	

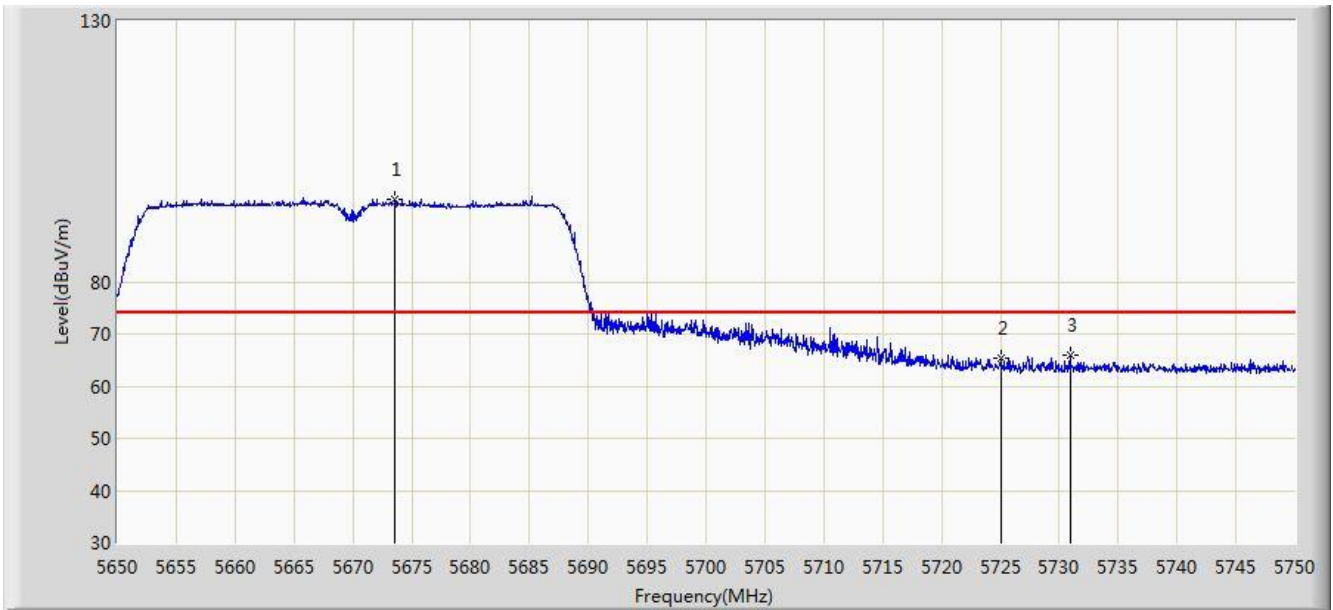


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5673.600	95.915	55.931	N/A	N/A	39.984	PK
2			5725.000	65.430	25.266	-8.570	74.000	40.164	PK
3			5730.900	65.941	25.750	-8.059	74.000	40.191	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz Ant 1	

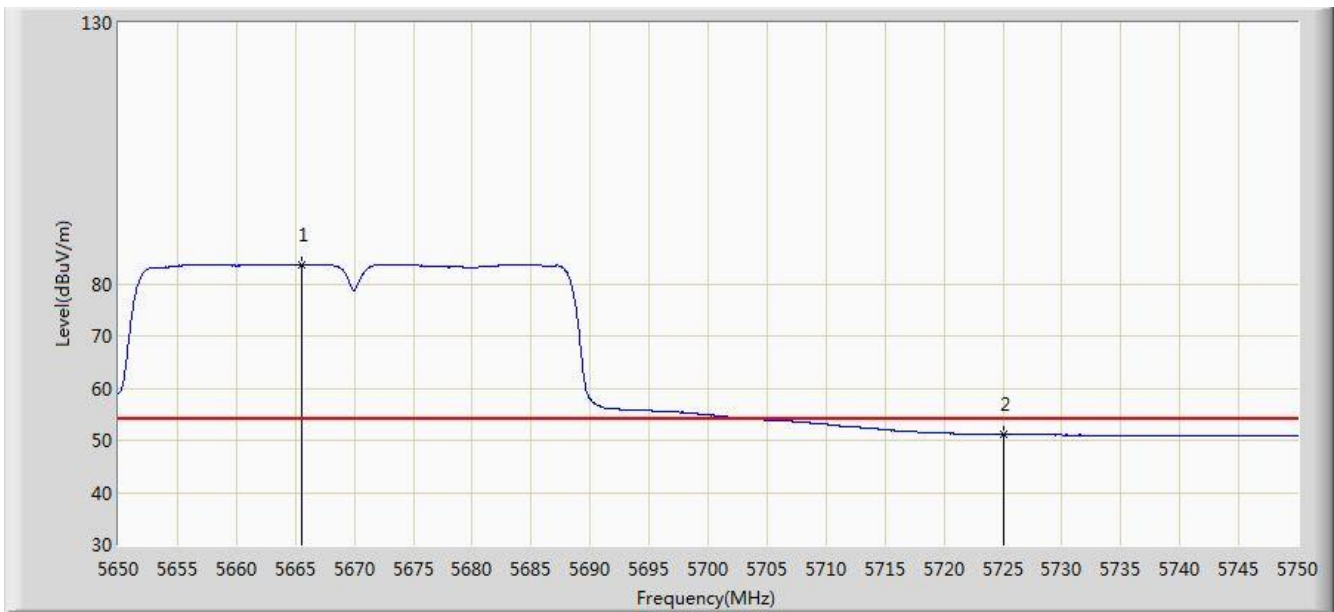


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5665.500	83.589	43.625	N/A	N/A	39.964	AV
2			5725.000	51.105	10.941	-2.895	54.000	40.164	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 1	

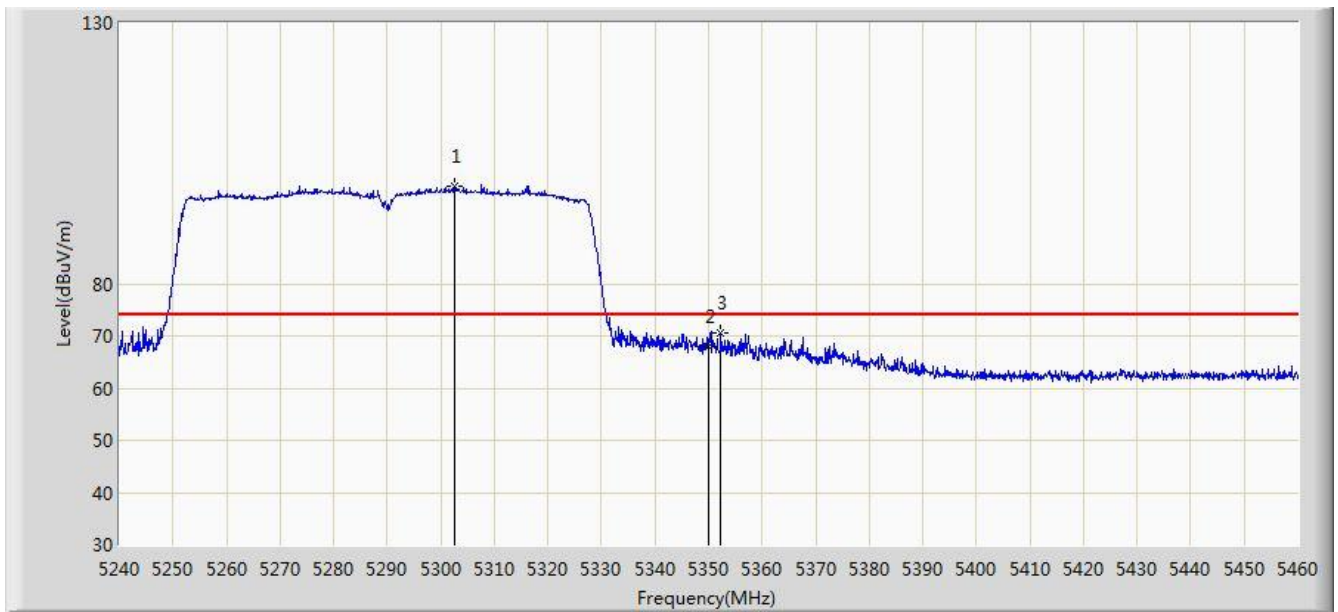


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5302.480	98.714	59.516	N/A	N/A	39.199	PK
2			5350.000	67.956	28.631	-6.044	74.000	39.324	PK
3			5352.310	70.637	31.306	-3.363	74.000	39.331	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 1	

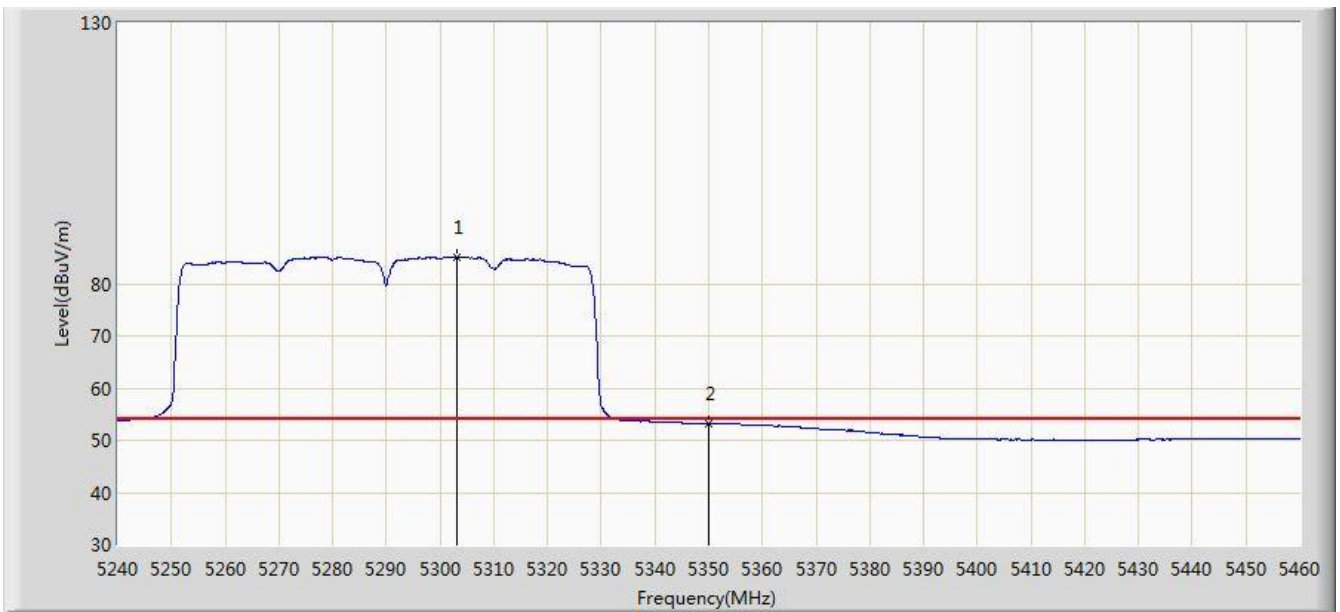


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5303.140	85.134	45.934	N/A	N/A	39.200	AV
2			5350.000	53.182	13.857	-0.818	54.000	39.324	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 1	

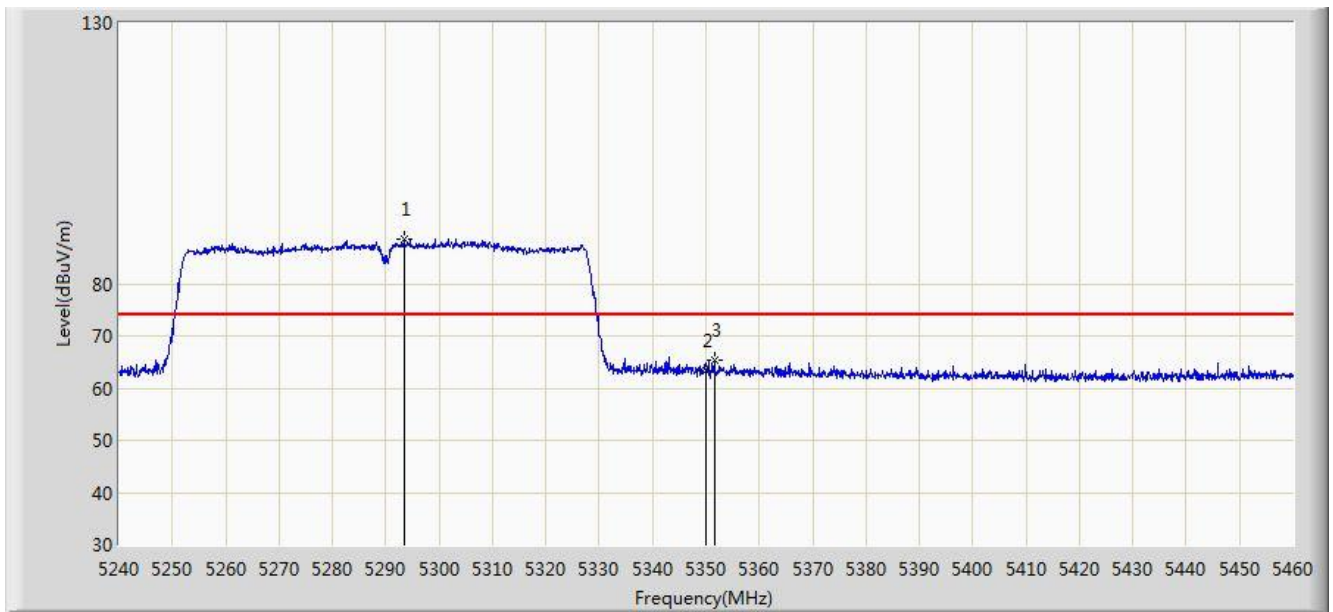


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5293.350	88.590	49.394	N/A	N/A	39.196	PK
2			5350.000	63.303	23.978	-10.697	74.000	39.324	PK
3			5351.540	65.485	26.156	-8.515	74.000	39.329	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz Ant 1	

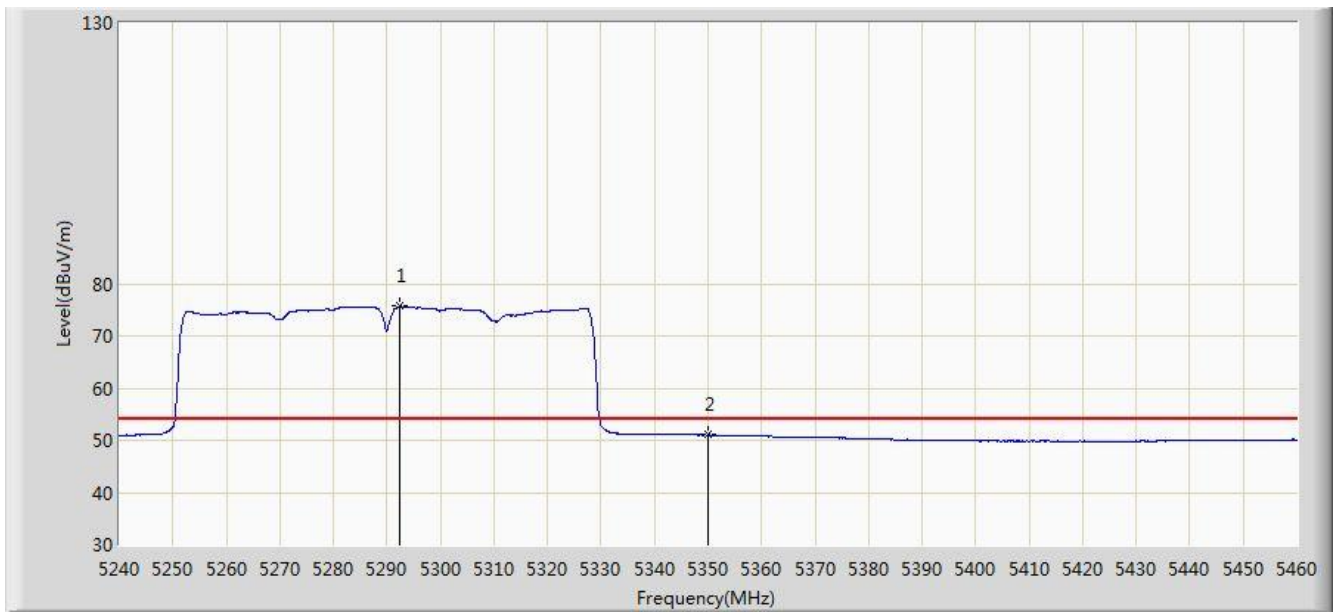


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5292.250	75.663	36.467	N/A	N/A	39.196	AV
2			5350.000	51.017	11.692	-2.983	54.000	39.324	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 1	

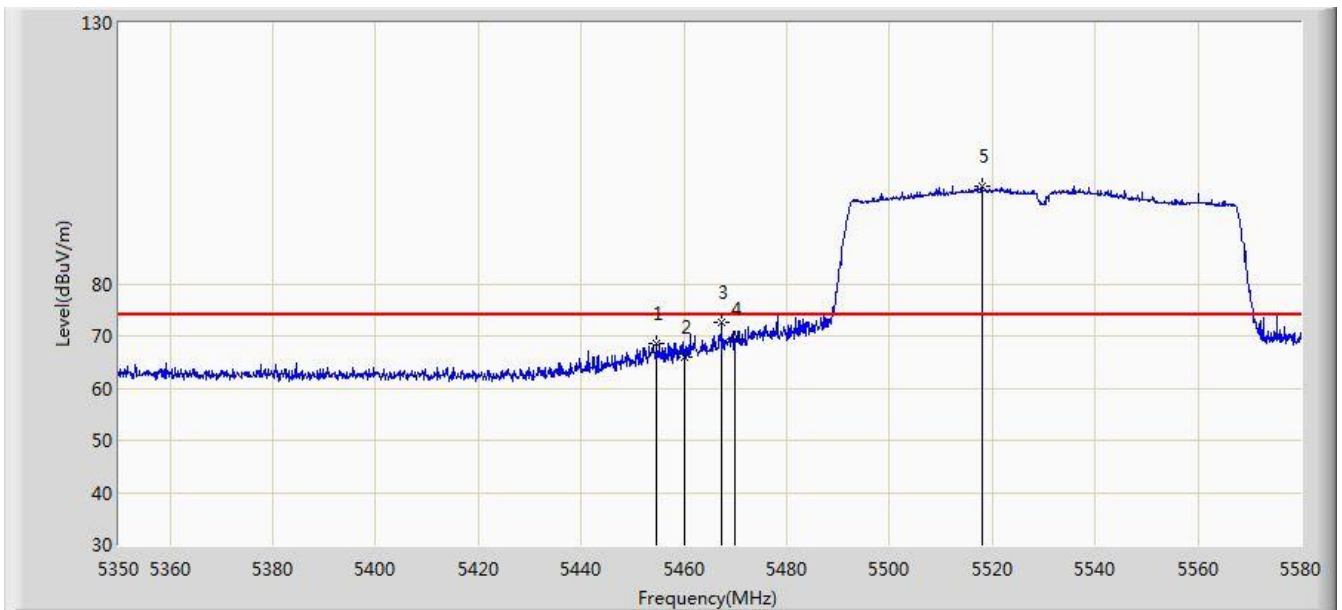


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.765	68.415	28.789	-5.585	74.000	39.627	PK
2			5460.000	66.016	26.380	-7.984	74.000	39.636	PK
3			5467.300	72.560	32.911	-1.440	74.000	39.649	PK
4			5470.000	69.484	29.830	-4.516	74.000	39.654	PK
5		*	5517.900	98.629	58.886	N/A	N/A	39.743	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 1	

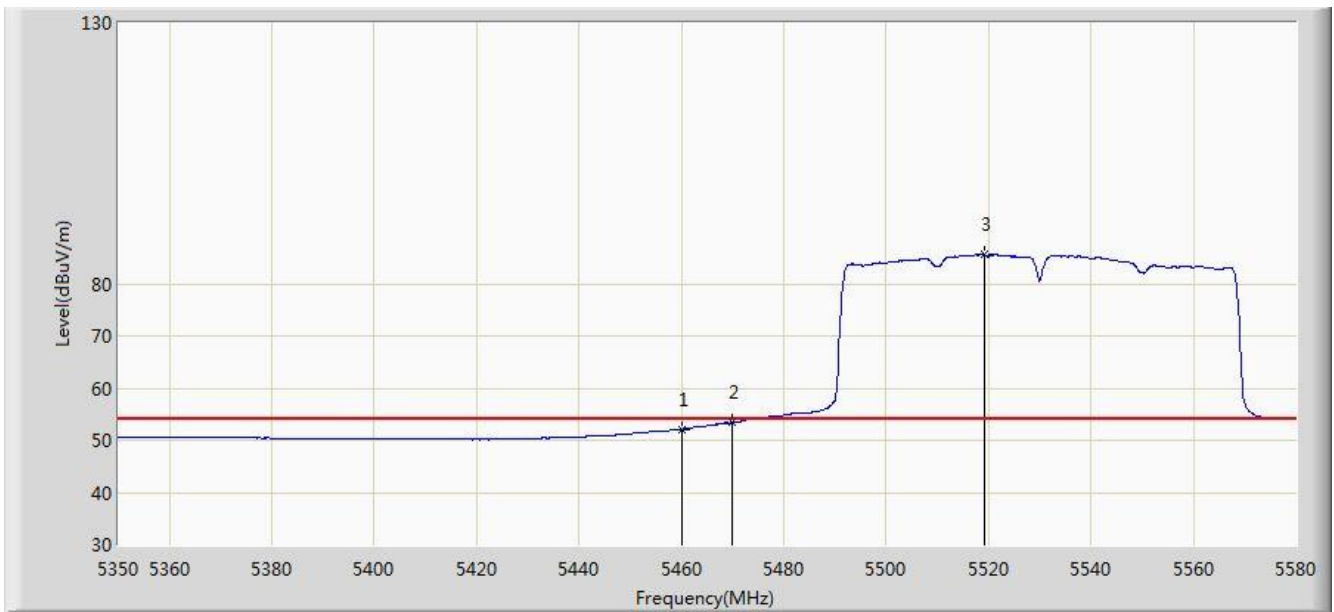


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	52.085	12.449	-1.915	54.000	39.636	AV
2			5470.000	53.425	13.771	-0.575	54.000	39.654	AV
3		*	5519.050	85.562	45.817	N/A	N/A	39.745	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 1	

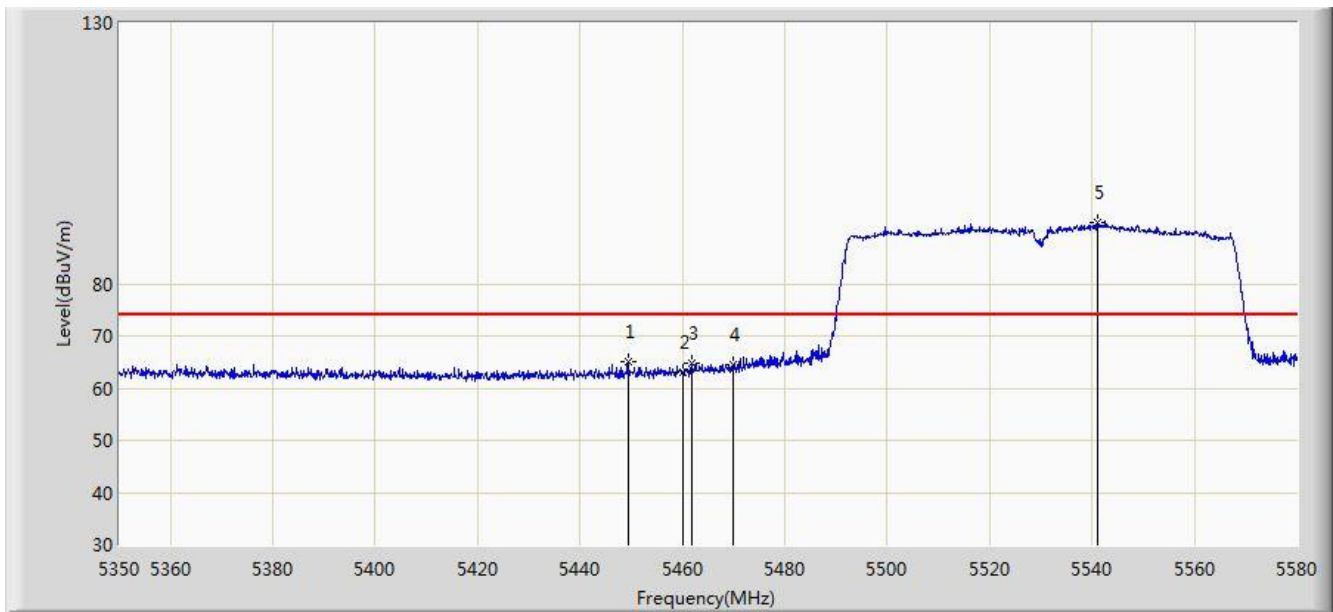


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5449.360	64.928	25.316	-9.072	74.000	39.611	PK
2			5460.000	62.994	23.358	-11.006	74.000	39.636	PK
3			5461.780	64.864	25.225	-9.136	74.000	39.639	PK
4			5470.000	64.625	24.971	-9.375	74.000	39.654	PK
5		*	5541.130	91.649	51.864	N/A	N/A	39.785	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 08:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz Ant 1	

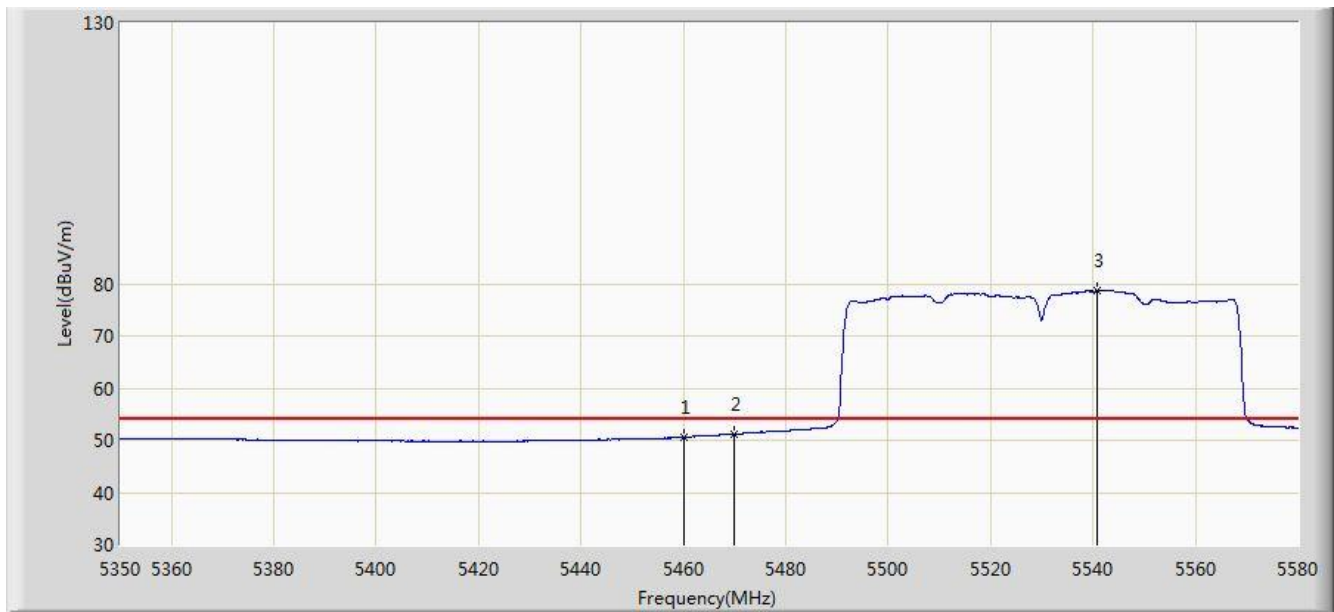


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.633	10.997	-3.367	54.000	39.636	AV
2			5470.000	51.222	11.568	-2.778	54.000	39.654	AV
3		*	5540.900	78.676	38.891	N/A	N/A	39.784	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

CDD Mode

Site: AC1	Time: 2016/12/24 - 04:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11a at Channel 5320MHz Ant 1 + 2	

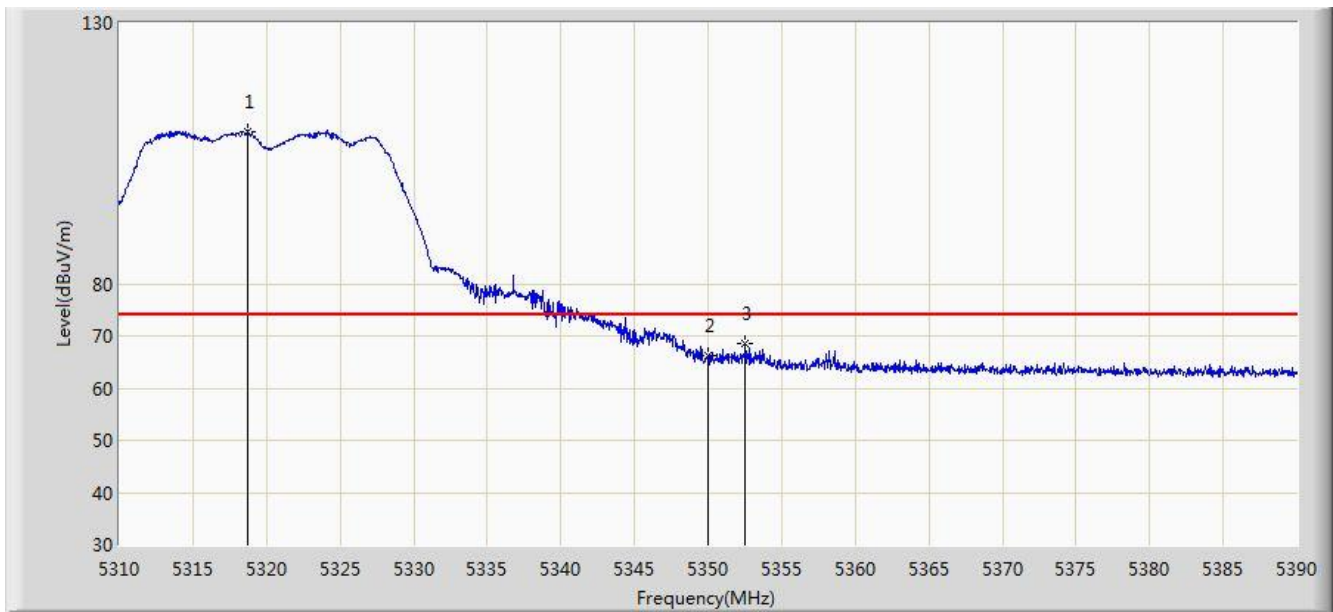


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.680	109.162	69.921	N/A	N/A	39.241	PK
2			5350.000	66.182	26.857	-7.818	74.000	39.324	PK
3			5352.520	68.437	29.106	-5.563	74.000	39.331	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 04:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11a at Channel 5320MHz Ant 1 + 2	

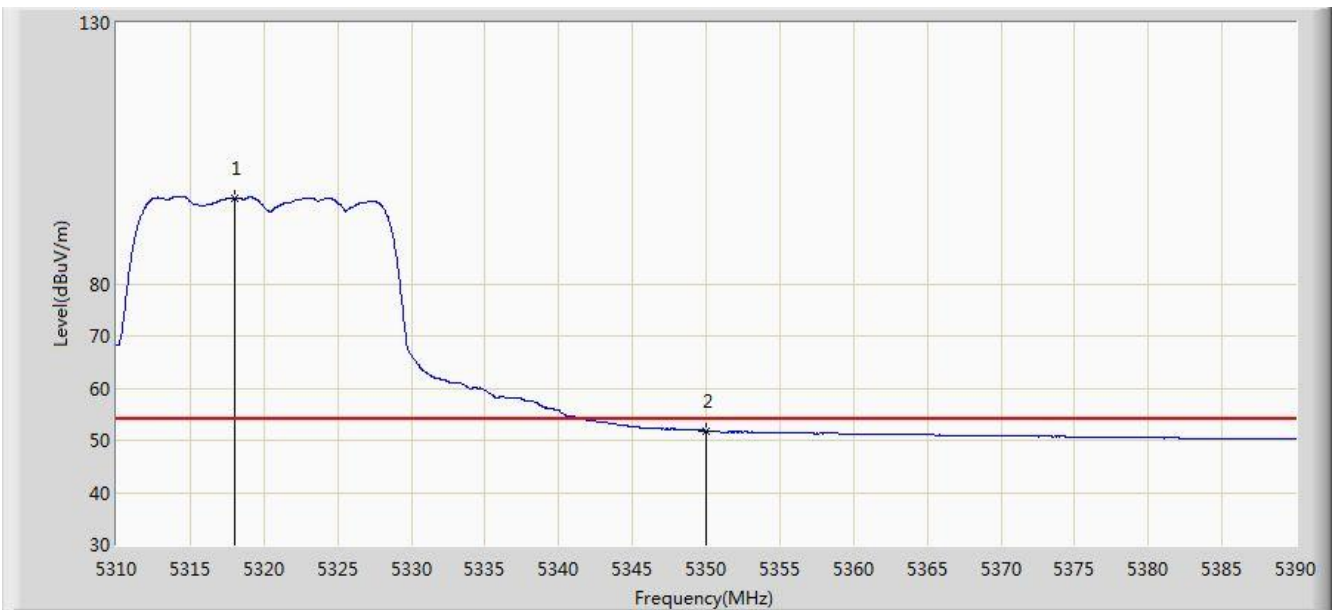


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.040	96.506	57.267	N/A	N/A	39.239	AV
2			5350.000	51.841	12.516	-2.159	54.000	39.324	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 04:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11a at Channel 5320MHz Ant 1 + 2	

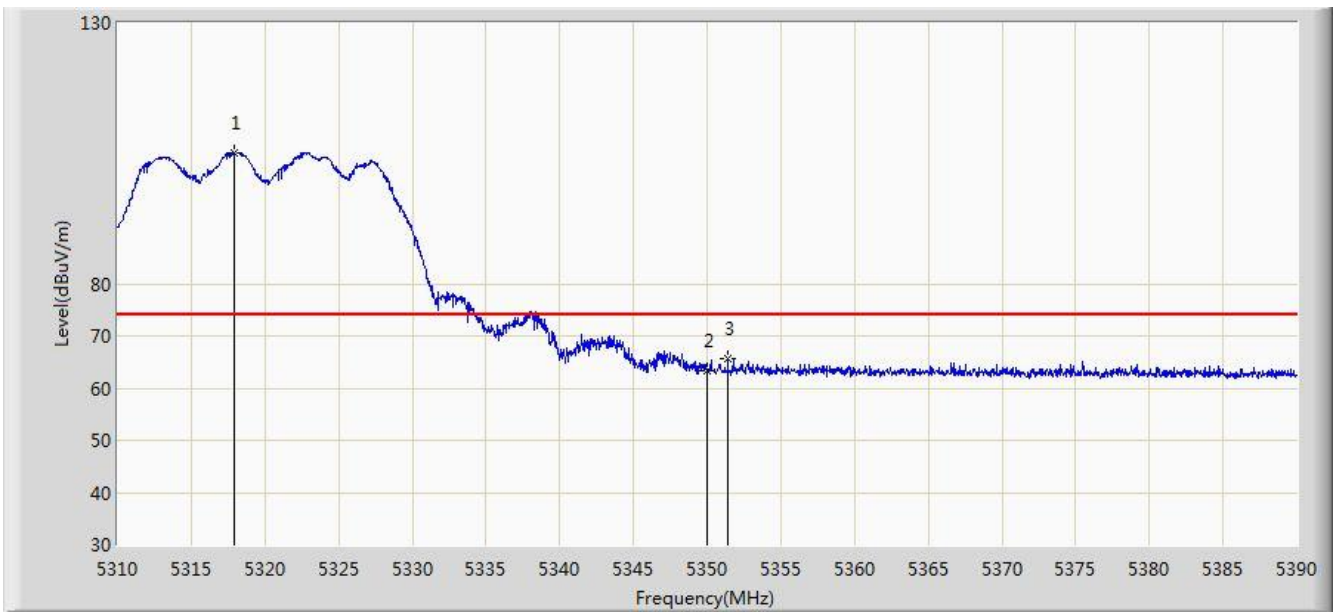


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.920	105.043	65.804	N/A	N/A	39.239	PK
2			5350.000	63.422	24.097	-10.578	74.000	39.324	PK
3			5351.400	65.715	26.387	-8.285	74.000	39.328	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 04:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11a at Channel 5320MHz Ant 1 + 2	

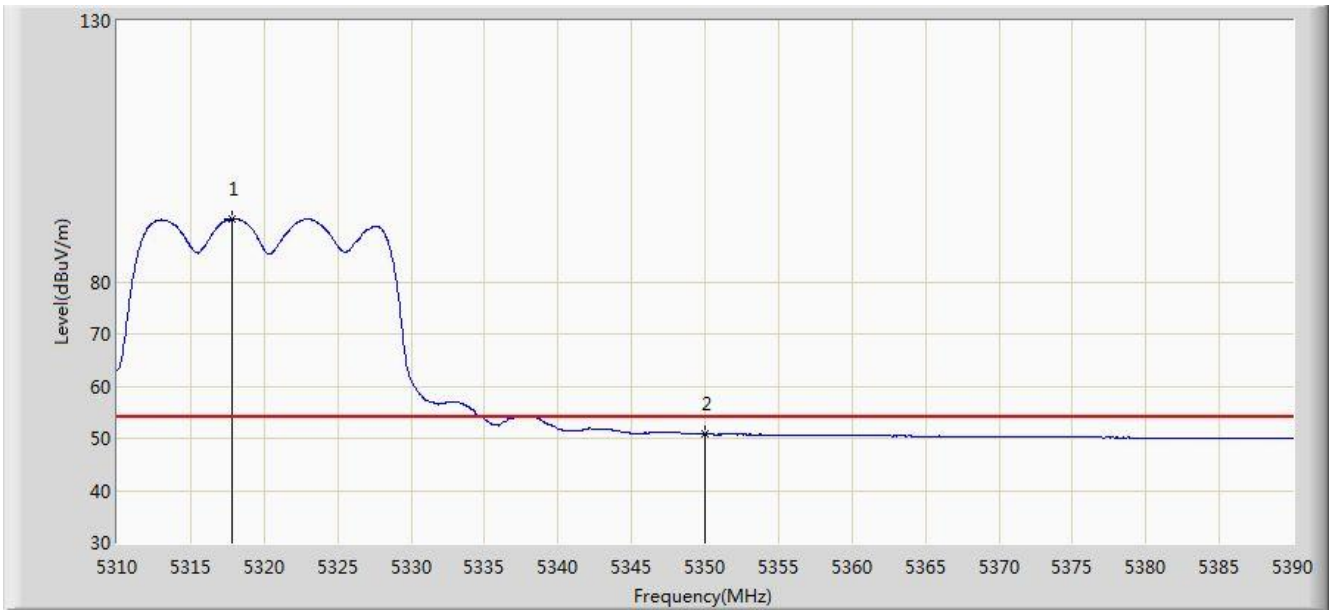


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.840	91.971	52.732	N/A	N/A	39.239	AV
2			5350.000	50.757	11.432	-3.243	54.000	39.324	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 04:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 1 + 2	

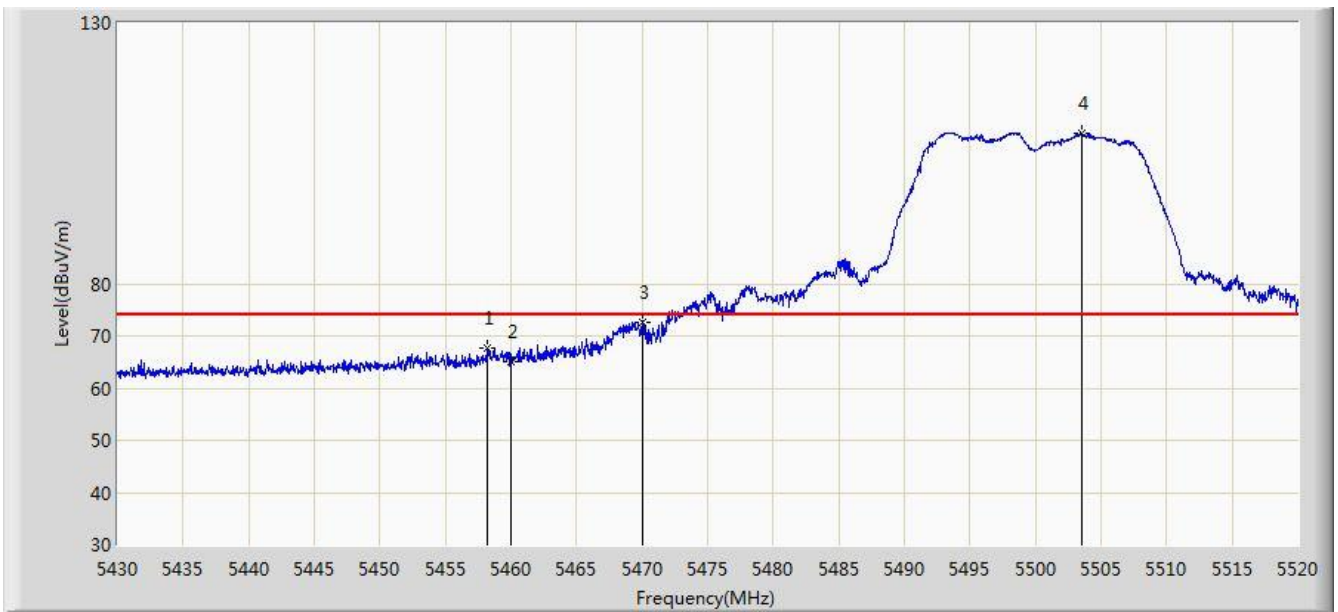


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.215	67.561	27.928	-6.439	74.000	39.633	PK
2			5460.000	65.183	25.547	-8.817	74.000	39.636	PK
3			5470.000	72.527	32.873	-1.473	74.000	39.654	PK
4		*	5503.530	108.792	69.075	N/A	N/A	39.717	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 04:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 1 + 2	

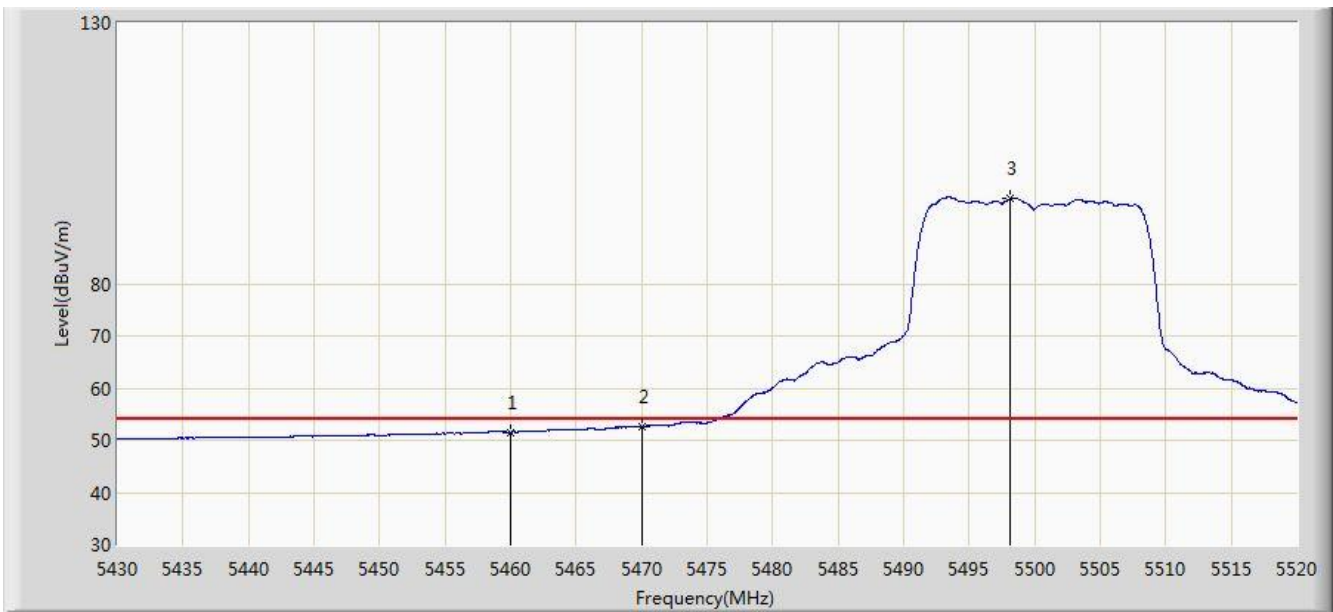


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	51.571	11.935	-2.429	54.000	39.636	AV
2			5470.000	52.597	12.943	-1.403	54.000	39.654	AV
3		*	5498.175	96.326	56.619	N/A	N/A	39.707	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 04:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 1 + 2	

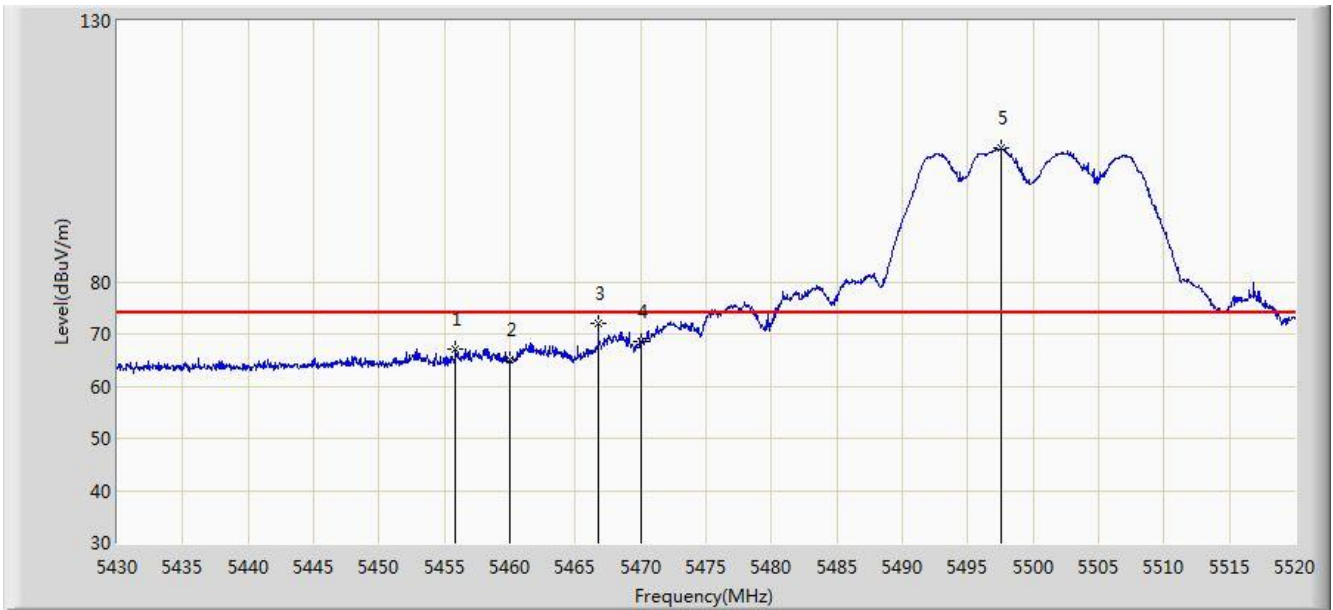


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.875	67.134	27.506	-6.866	74.000	39.629	PK
2			5460.000	64.943	25.307	-9.057	74.000	39.636	PK
3			5466.765	72.145	32.497	-1.855	74.000	39.649	PK
4			5470.000	68.523	28.869	-5.477	74.000	39.654	PK
5		*	5497.545	105.651	65.945	N/A	N/A	39.706	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 04:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11a at Channel 5500MHz Ant 1 + 2	

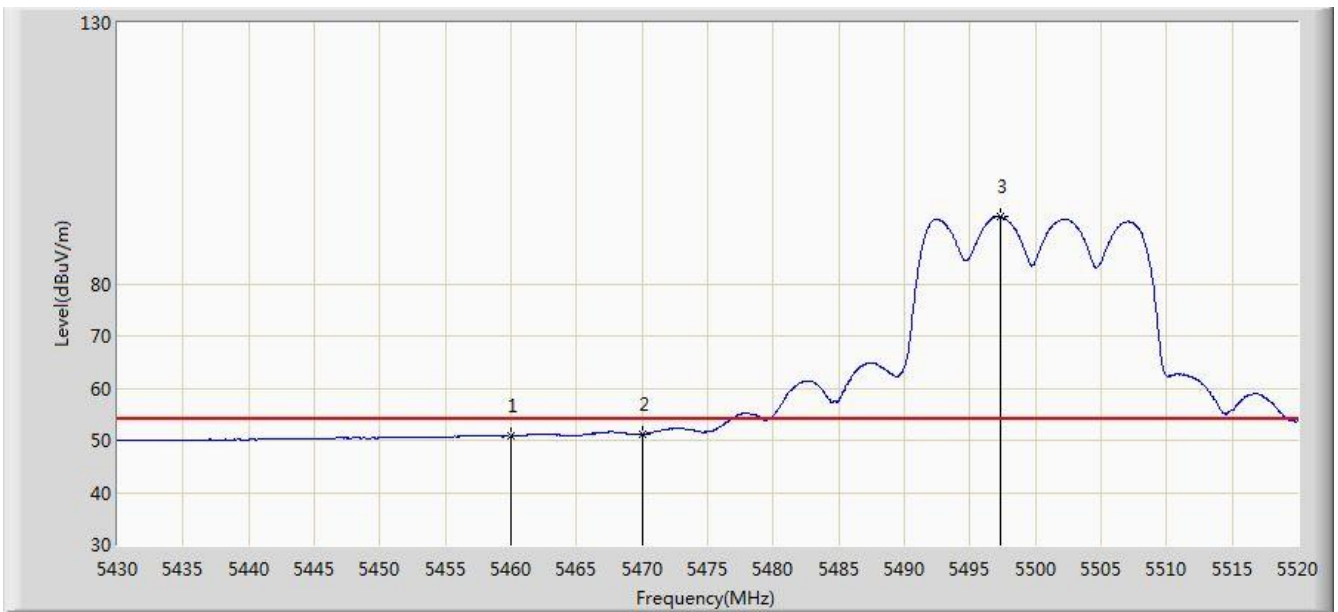


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.741	11.105	-3.259	54.000	39.636	AV
2			5470.000	51.200	11.546	-2.800	54.000	39.654	AV
3		*	5497.275	92.892	53.187	N/A	N/A	39.705	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 04:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11a at Channel 5700MHz Ant 1 + 2	

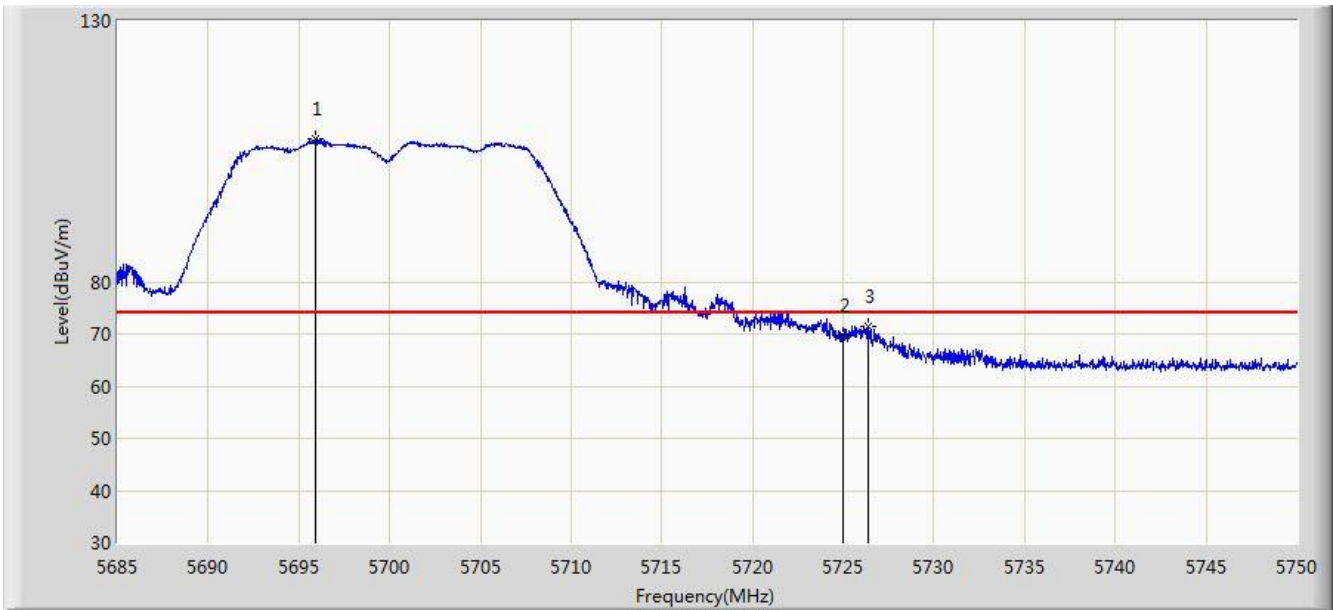


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.920	107.496	67.454	N/A	N/A	40.043	PK
2			5725.000	69.762	29.598	-4.238	74.000	40.164	PK
3			5726.373	71.571	31.401	-2.429	74.000	40.170	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 04:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11a at Channel 5700MHz Ant 1 + 2	

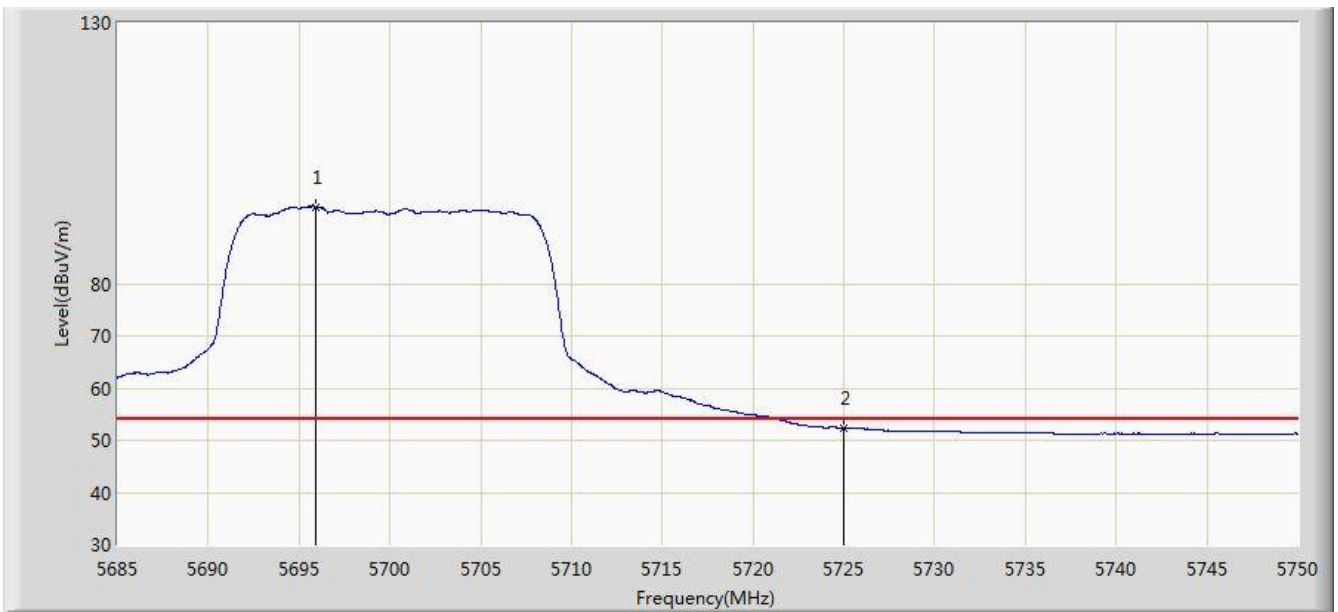


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.888	94.769	54.727	N/A	N/A	40.043	AV
2			5725.000	52.318	12.154	-1.682	54.000	40.164	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 04:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11a at Channel 5700MHz Ant 1 + 2	

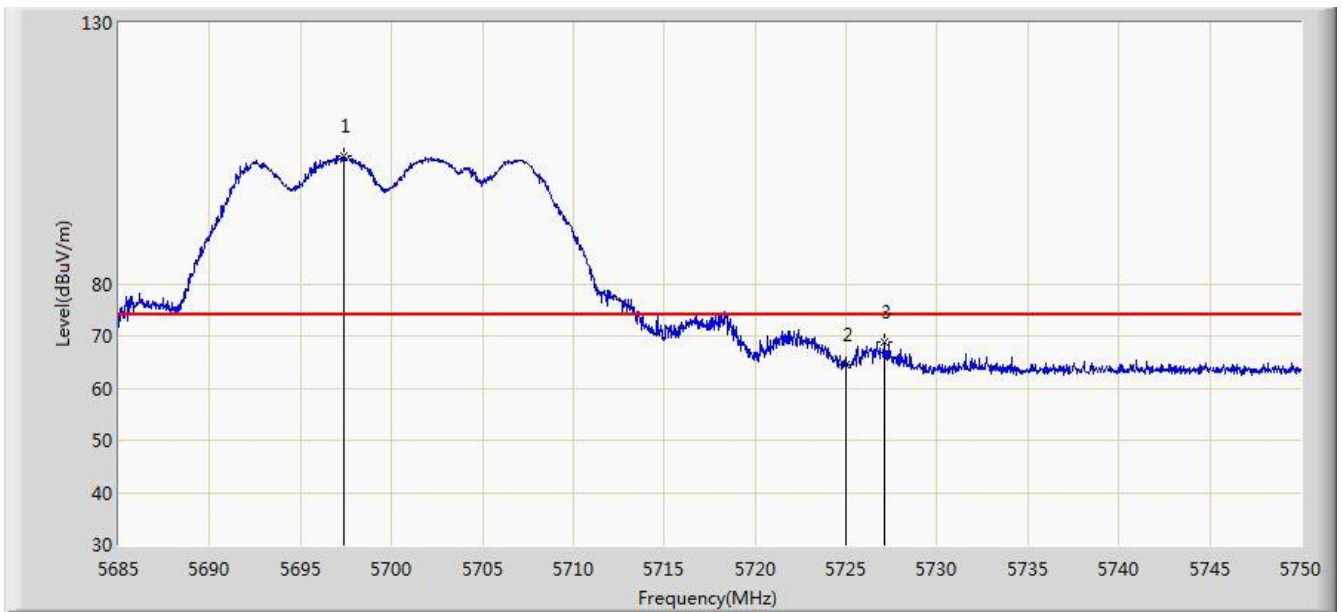


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.350	104.477	64.429	N/A	N/A	40.048	PK
2			5725.000	64.434	24.270	-9.566	74.000	40.164	PK
3			5727.087	68.799	28.625	-5.201	74.000	40.174	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 04:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11a at Channel 5700MHz Ant 1 + 2	

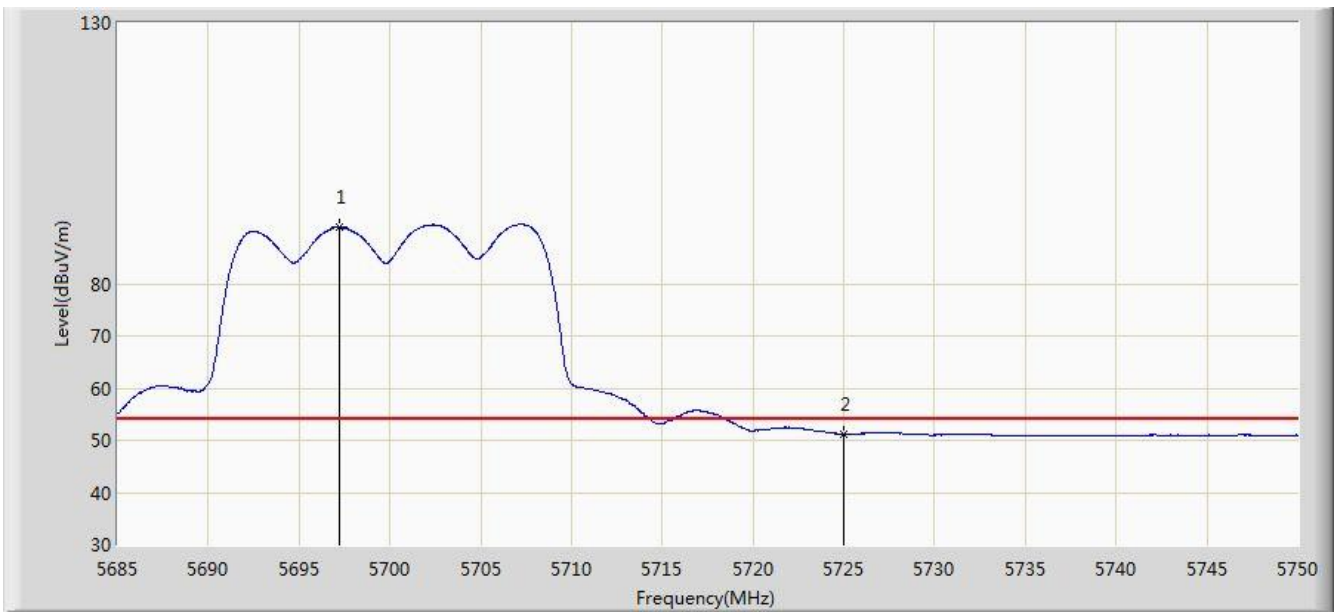


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.187	90.833	50.786	N/A	N/A	40.047	AV
2			5725.000	51.174	11.010	-2.826	54.000	40.164	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 04:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 1 + 2	

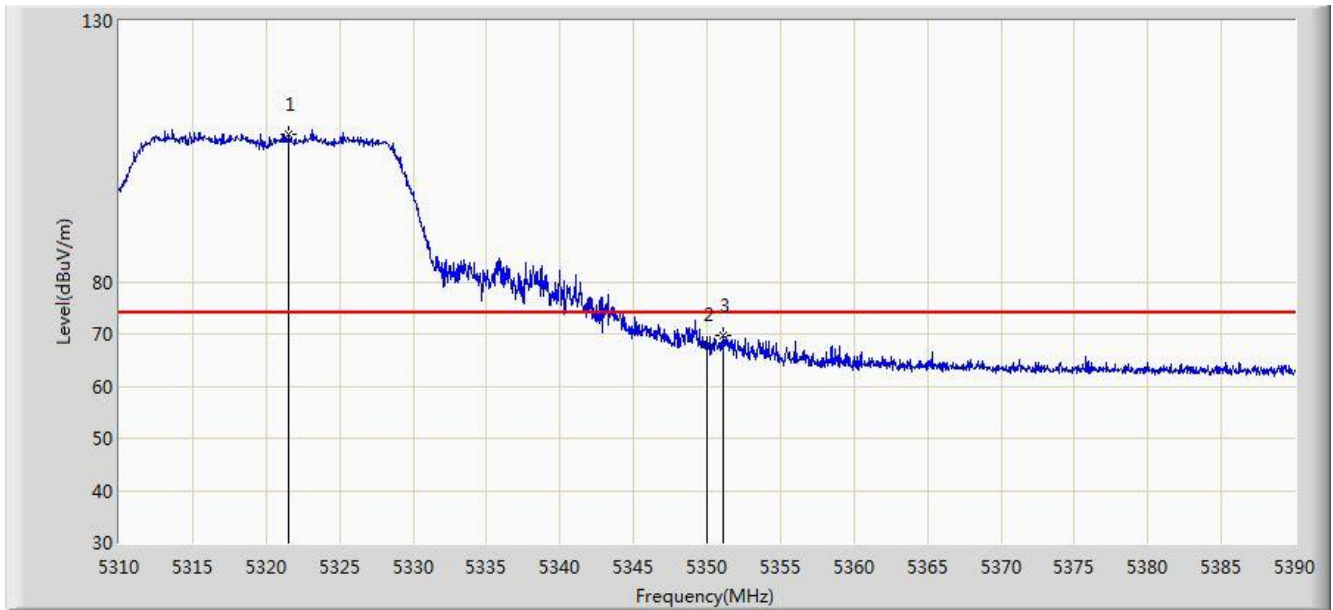


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.480	108.345	69.096	N/A	N/A	39.248	PK
2			5350.000	67.865	28.540	-6.135	74.000	39.324	PK
3			5351.120	69.707	30.379	-4.293	74.000	39.327	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 04:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 1 + 2	

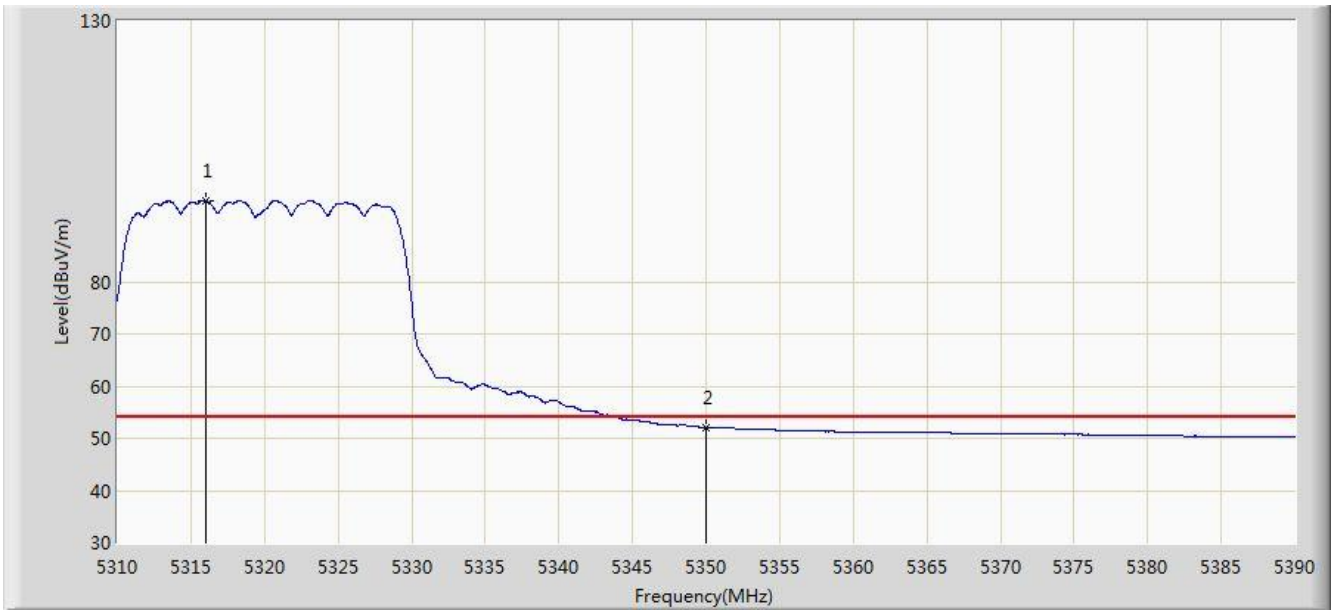


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.040	95.495	56.261	N/A	N/A	39.234	AV
2			5350.000	52.111	12.786	-1.889	54.000	39.324	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 04:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 1 + 2	

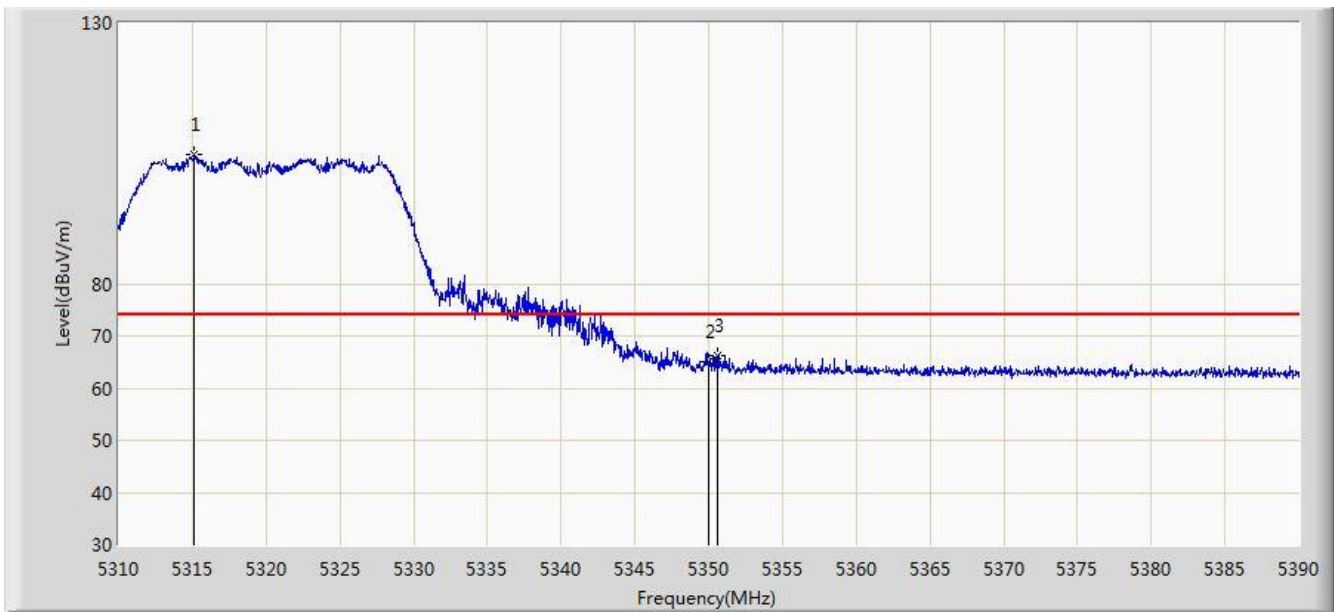


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.160	104.918	65.686	N/A	N/A	39.232	PK
2			5350.000	65.034	25.709	-8.966	74.000	39.324	PK
3			5350.560	66.226	26.900	-7.774	74.000	39.326	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 04:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz Ant 1 + 2	

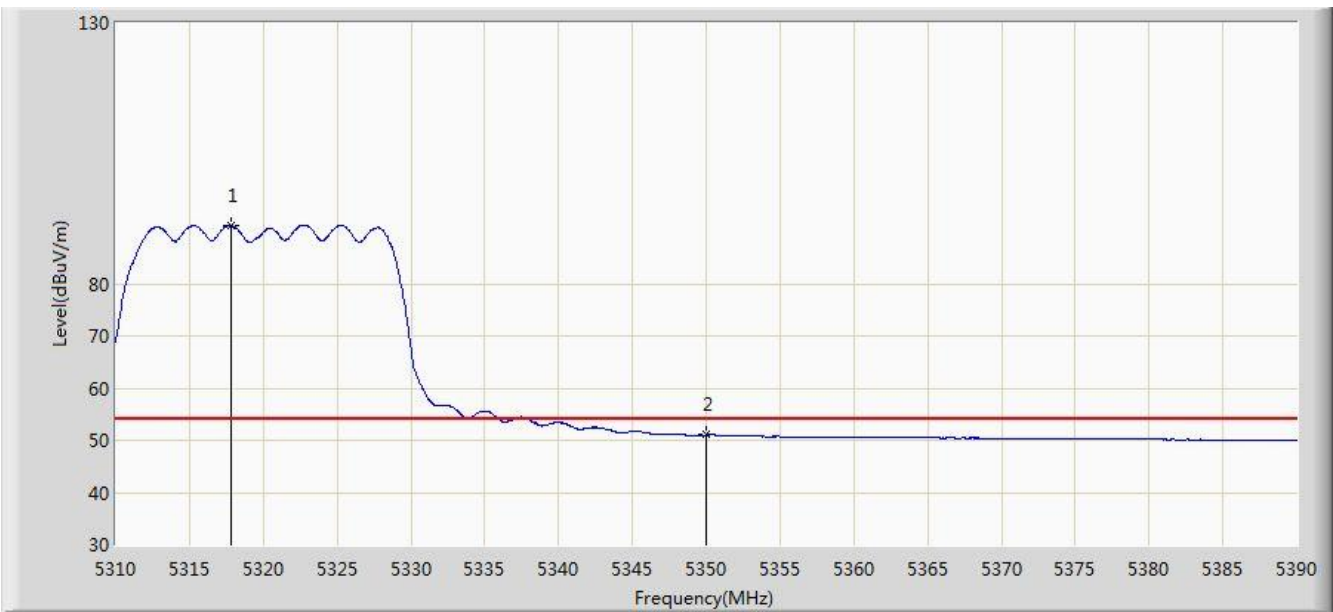


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.800	91.193	51.954	N/A	N/A	39.239	AV
2			5350.000	51.024	11.699	-2.976	54.000	39.324	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 05:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 1 + 2	

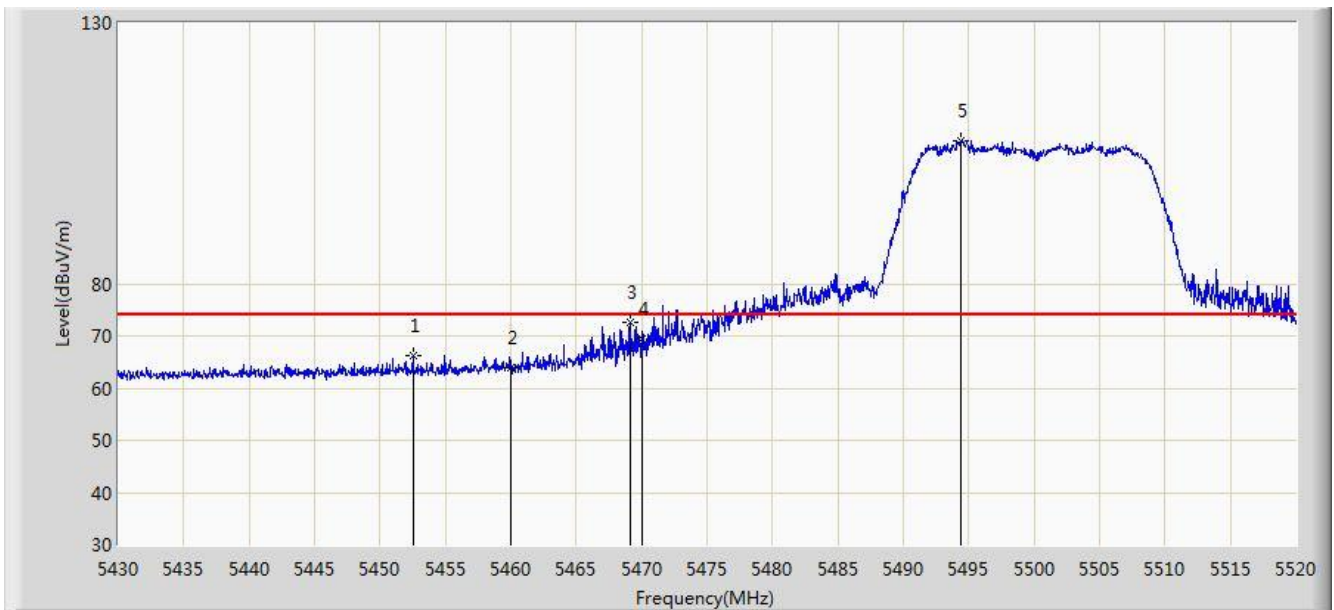


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.500	66.277	26.656	-7.723	74.000	39.621	PK
2			5460.000	64.016	24.380	-9.984	74.000	39.636	PK
3			5469.105	72.581	32.928	-1.419	74.000	39.653	PK
4			5470.000	69.442	29.788	-4.558	74.000	39.654	PK
5		*	5494.440	107.299	67.599	N/A	N/A	39.700	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 05:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 1 + 2	

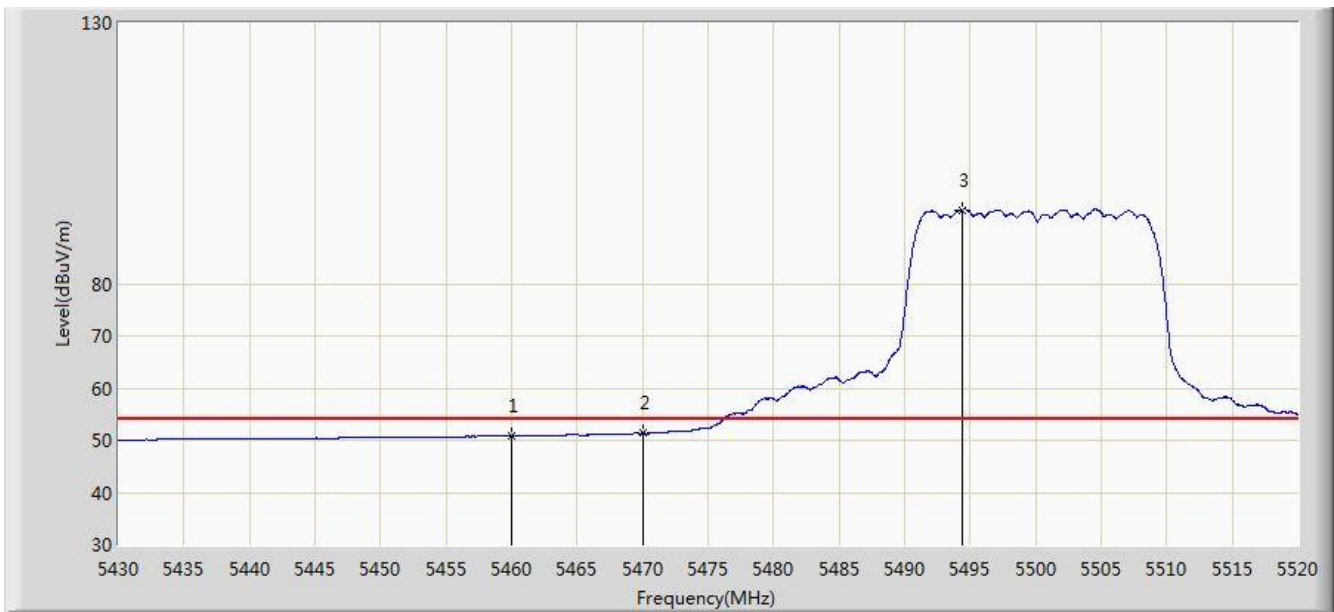


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.906	11.270	-3.094	54.000	39.636	AV
2			5470.000	51.312	11.658	-2.688	54.000	39.654	AV
3		*	5494.440	94.150	54.450	N/A	N/A	39.700	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 05:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 1 + 2	

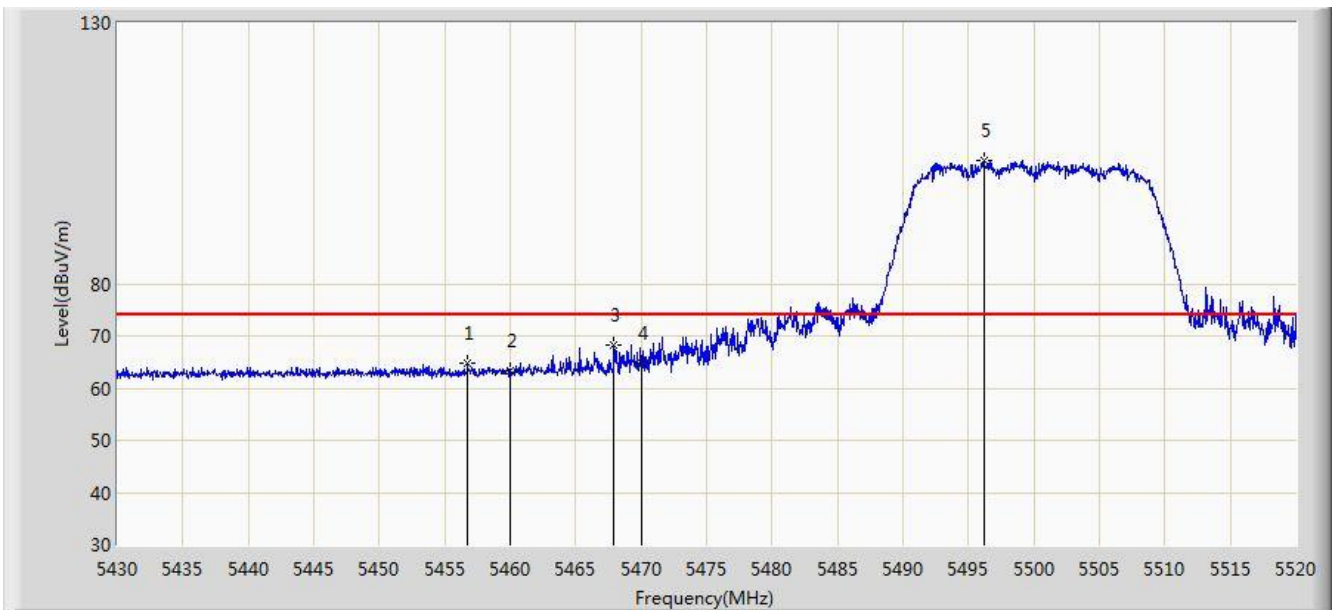


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.730	64.841	25.211	-9.159	74.000	39.630	PK
2			5460.000	63.297	23.661	-10.703	74.000	39.636	PK
3			5467.935	68.230	28.579	-5.770	74.000	39.651	PK
4			5470.000	64.763	25.109	-9.237	74.000	39.654	PK
5		*	5496.150	103.491	63.788	N/A	N/A	39.703	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 05:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz Ant 1 + 2	

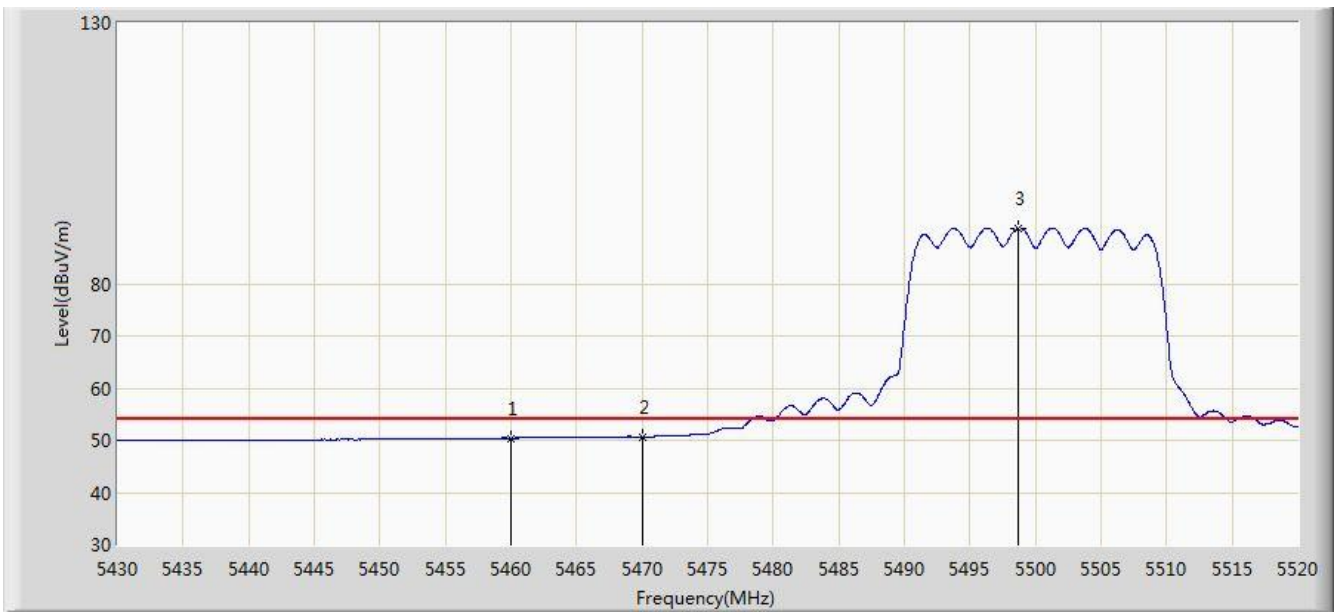


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.408	10.772	-3.592	54.000	39.636	AV
2			5470.000	50.677	11.023	-3.323	54.000	39.654	AV
3		*	5498.715	90.723	51.015	N/A	N/A	39.708	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 05:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 1 + 2	

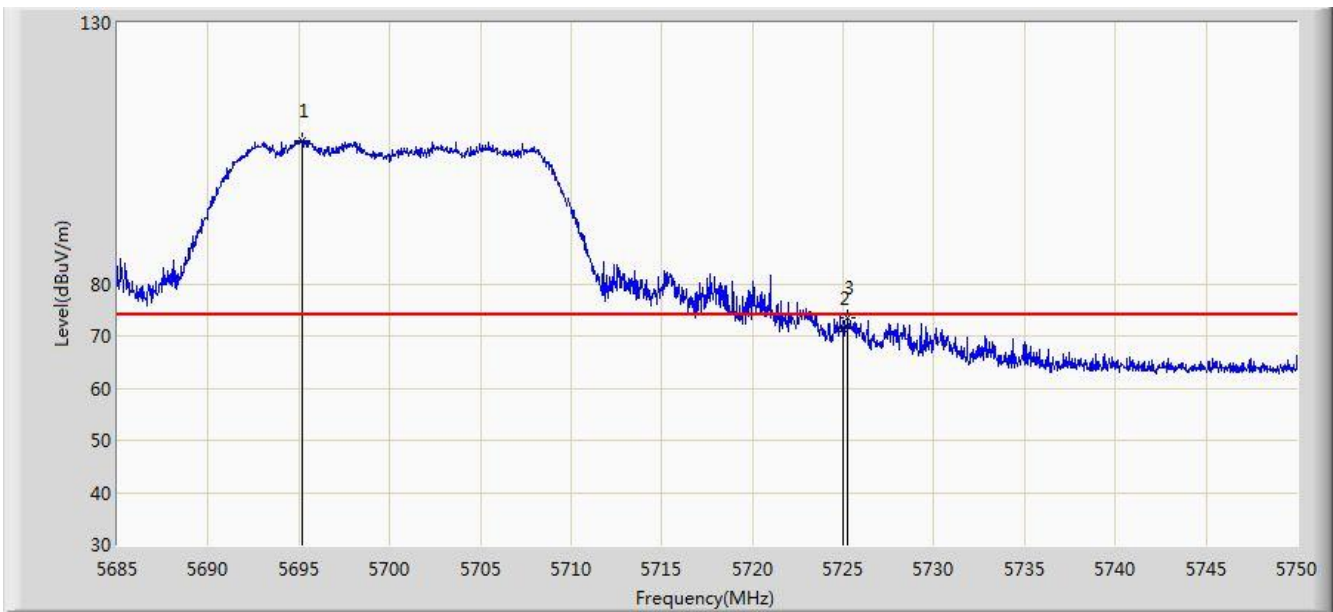


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.172	107.514	67.474	N/A	N/A	40.040	PK
2			5725.000	71.526	31.362	-2.474	74.000	40.164	PK
3			5725.268	73.426	33.261	-0.574	74.000	40.165	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 05:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 1 + 2	

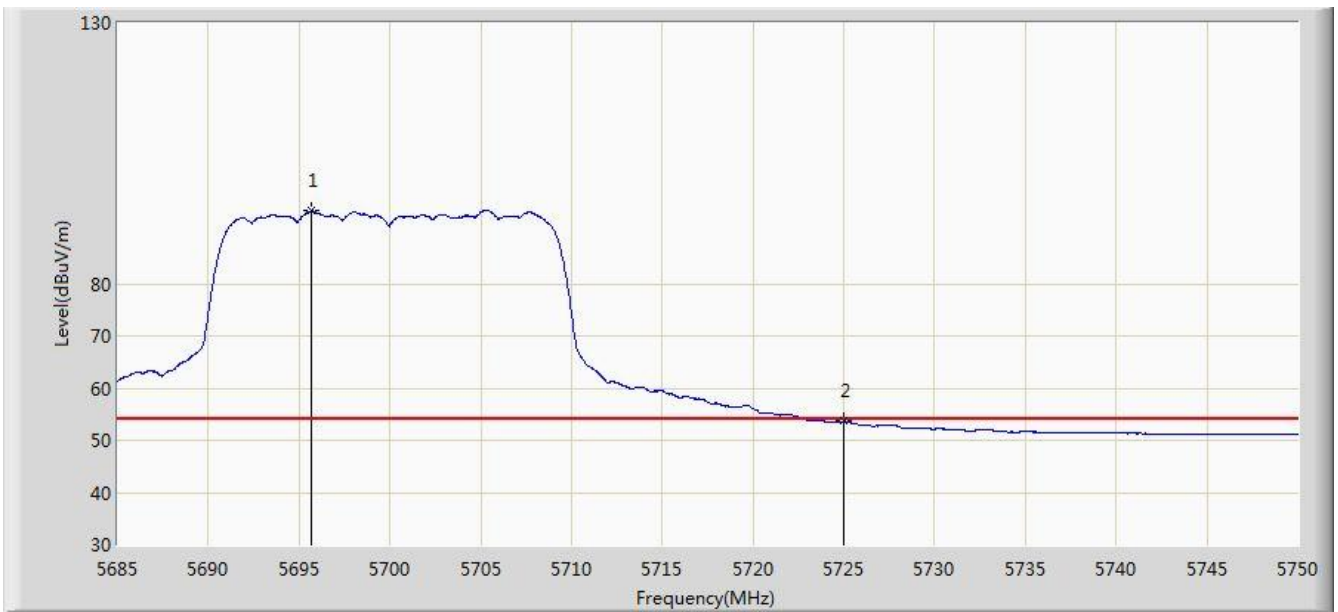


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.692	93.926	53.884	N/A	N/A	40.041	AV
2			5725.000	53.650	13.486	-0.350	54.000	40.164	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 05:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 1 + 2	

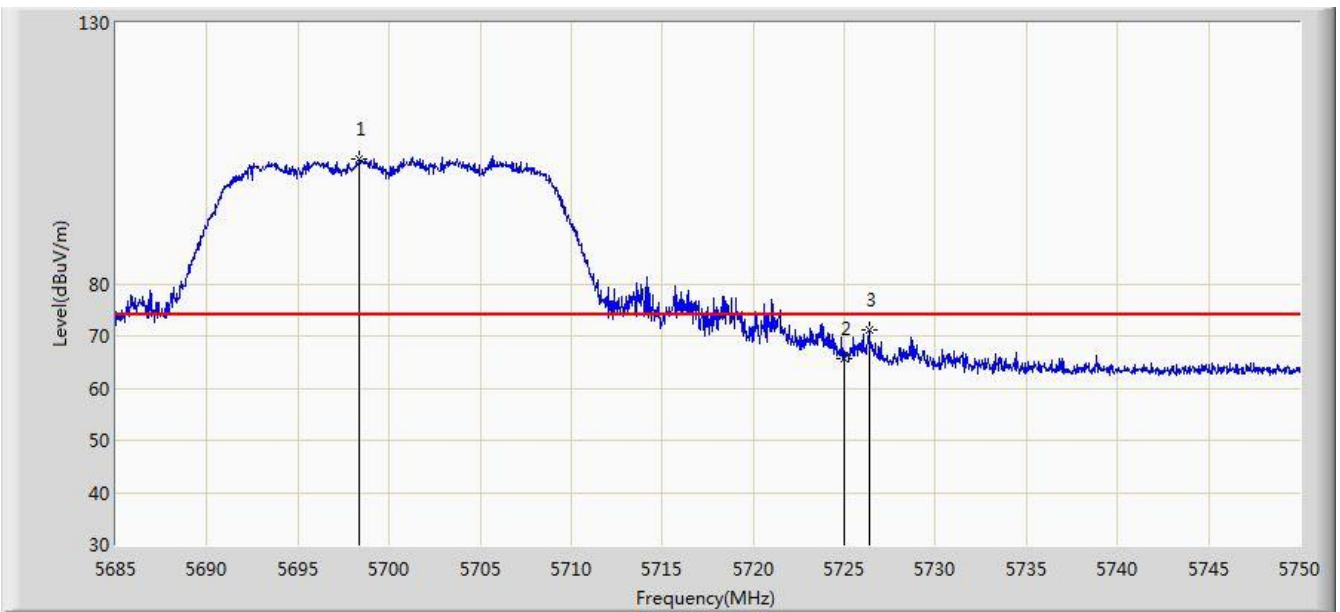


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.390	103.846	63.795	N/A	N/A	40.052	PK
2			5725.000	65.743	25.579	-8.257	74.000	40.164	PK
3			5726.340	71.028	30.858	-2.972	74.000	40.170	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 05:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz Ant 1 + 2	

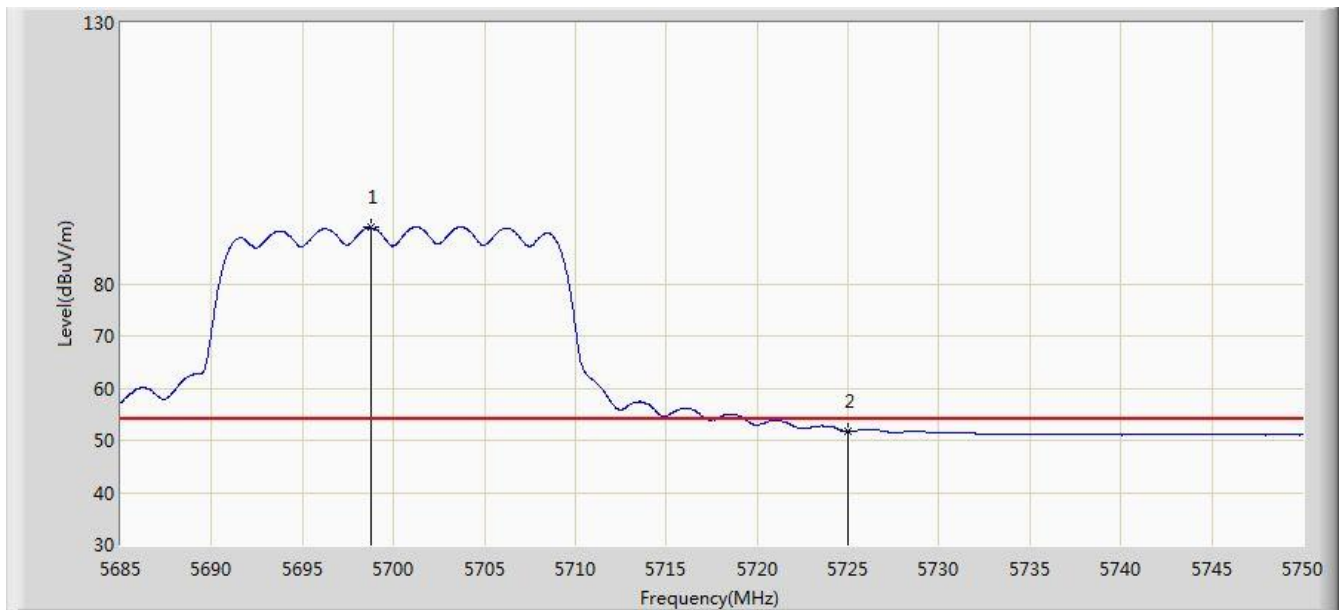


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.748	90.726	50.673	N/A	N/A	40.053	AV
2			5725.000	51.720	11.556	-2.280	54.000	40.164	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 05:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 1 + 2	

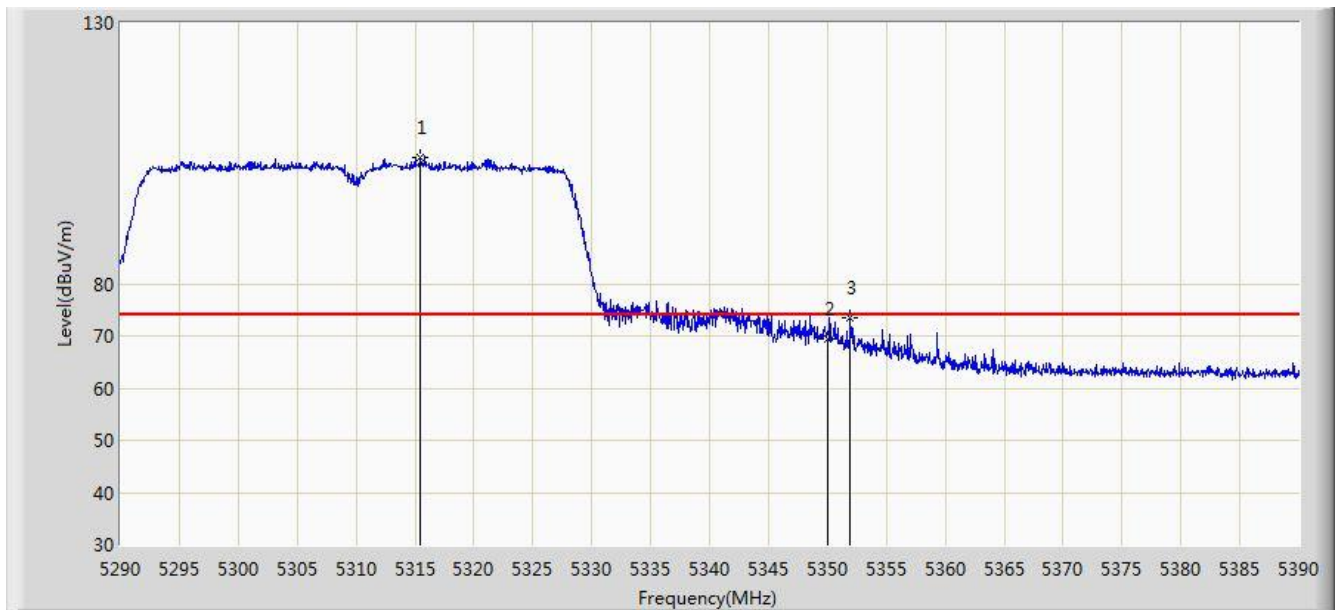


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.500	104.193	64.961	N/A	N/A	39.233	PK
2			5350.000	69.464	30.139	-4.536	74.000	39.324	PK
3			5351.950	73.517	34.187	-0.483	74.000	39.330	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 05:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 1 + 2	

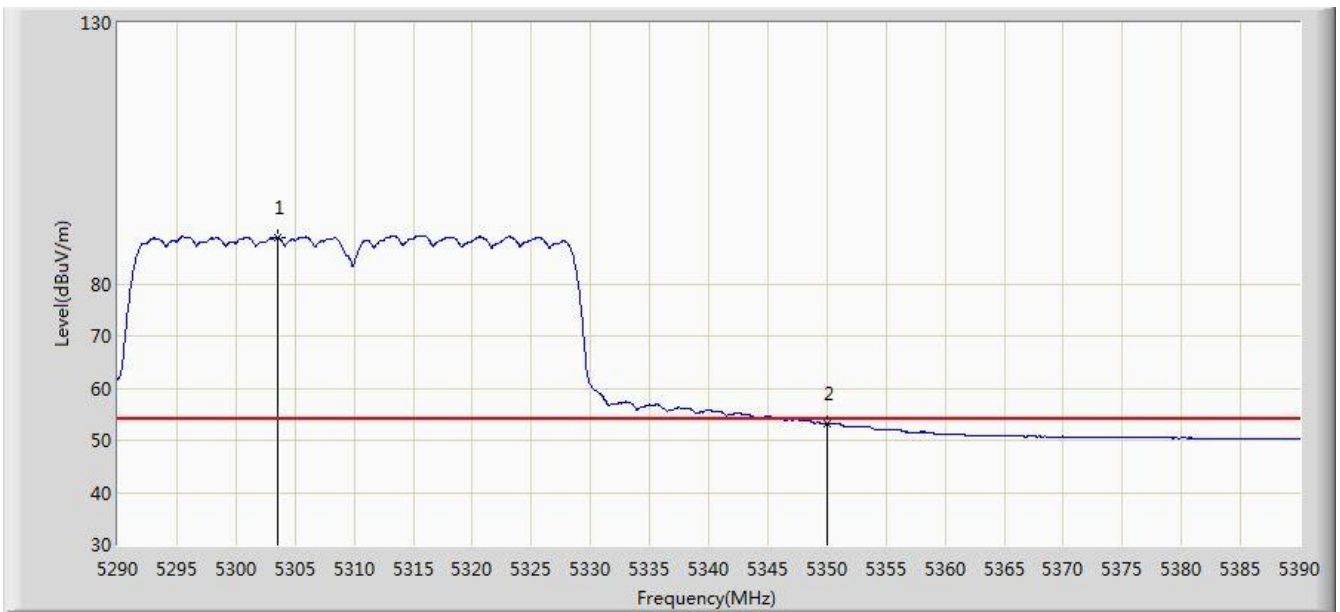


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5303.500	88.873	49.672	N/A	N/A	39.201	AV
2			5350.000	53.256	13.931	-0.744	54.000	39.324	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 05:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 1 + 2	

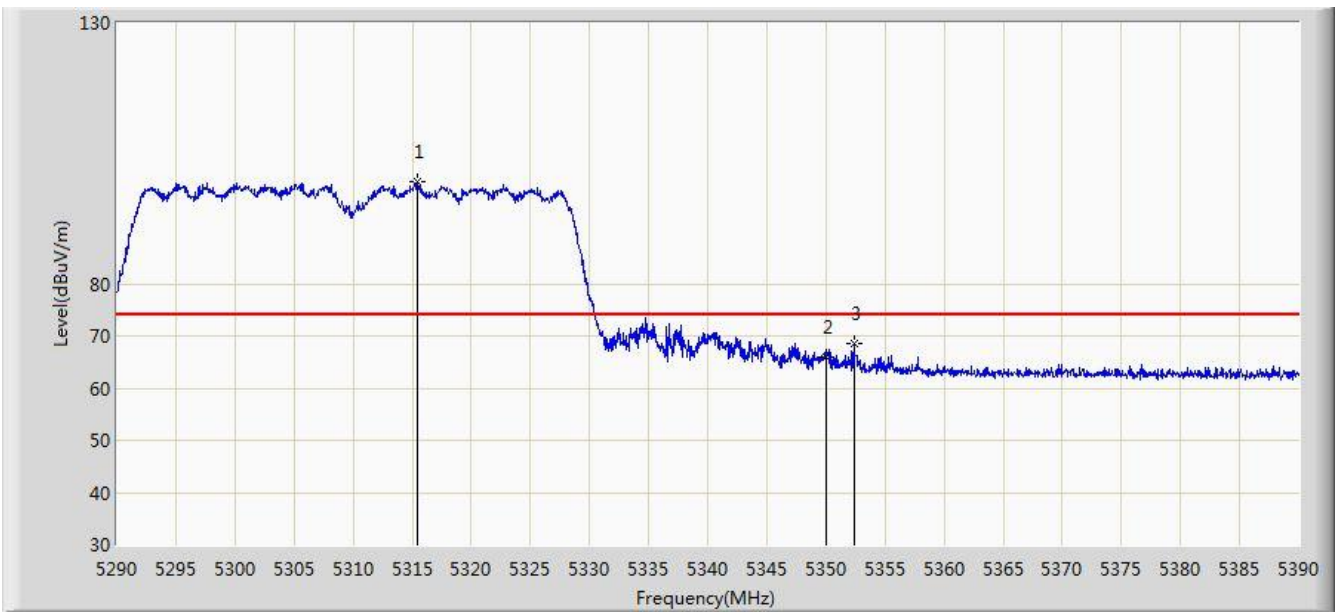


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.500	99.701	60.469	N/A	N/A	39.233	PK
2			5350.000	65.803	26.478	-8.197	74.000	39.324	PK
3			5352.350	68.443	29.112	-5.557	74.000	39.331	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 05:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz Ant 1 + 2	

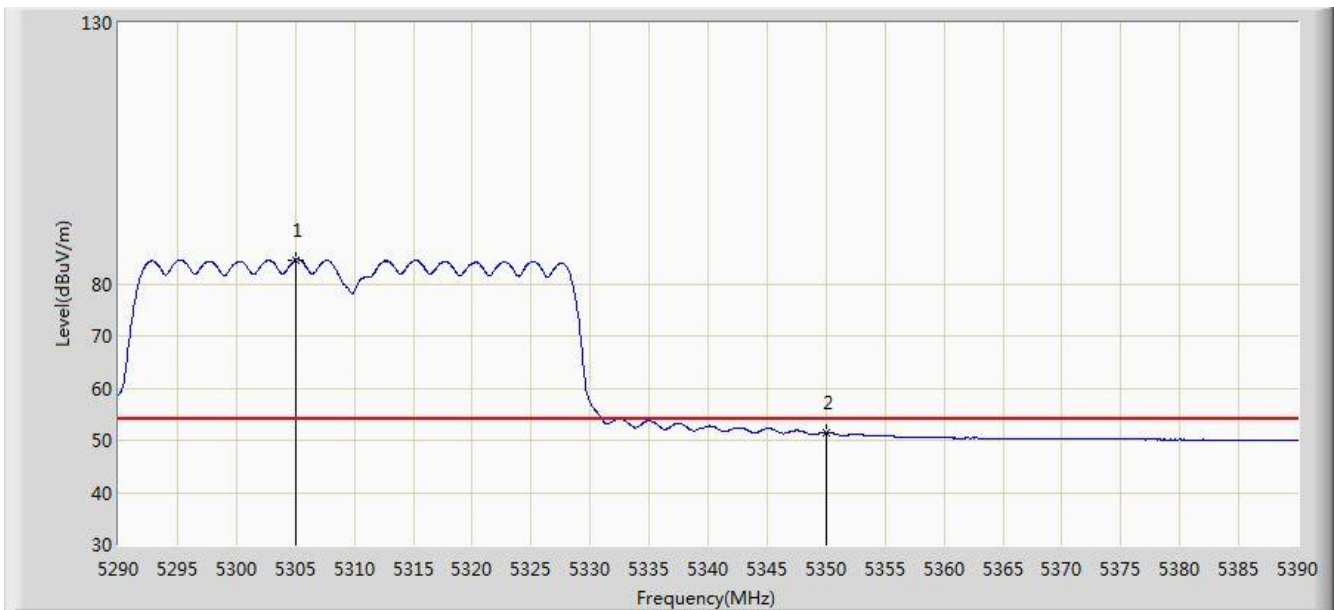


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5305.050	84.580	45.375	N/A	N/A	39.205	AV
2			5350.000	51.564	12.239	-2.436	54.000	39.324	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 05:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 1 + 2	

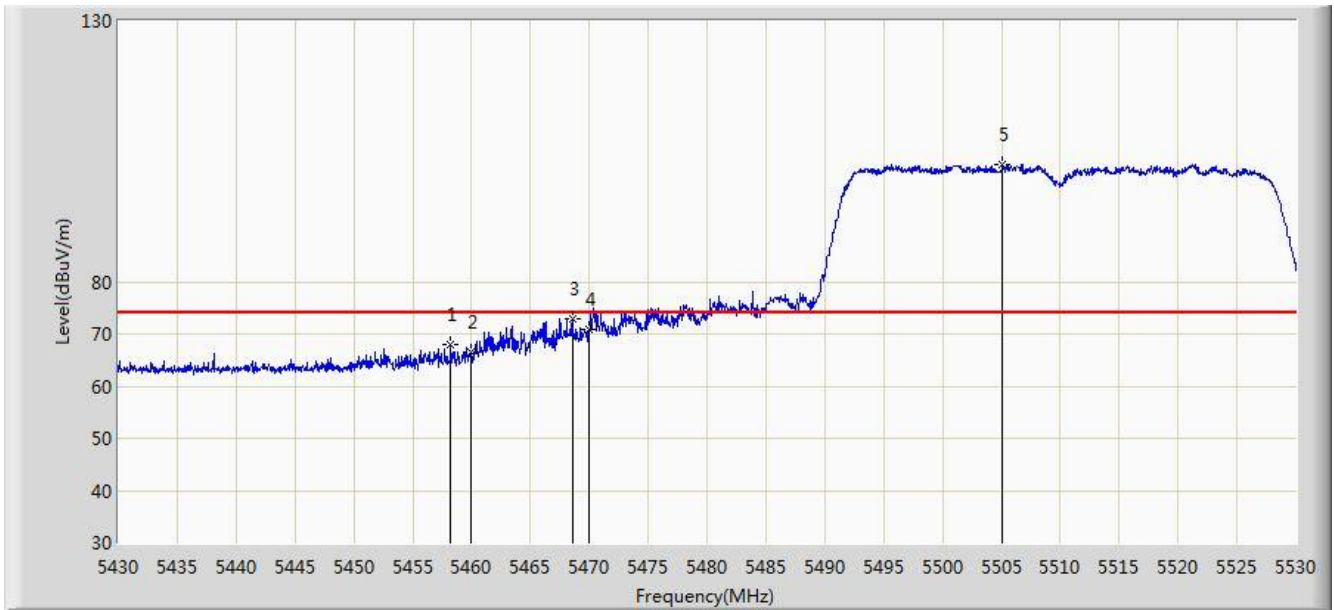


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.200	68.058	28.425	-5.942	74.000	39.632	PK
2			5460.000	66.552	26.916	-7.448	74.000	39.636	PK
3			5468.550	72.957	33.305	-1.043	74.000	39.652	PK
4			5470.000	70.903	31.249	-3.097	74.000	39.654	PK
5		*	5505.100	102.366	62.646	N/A	N/A	39.720	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 05:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 1 + 2	

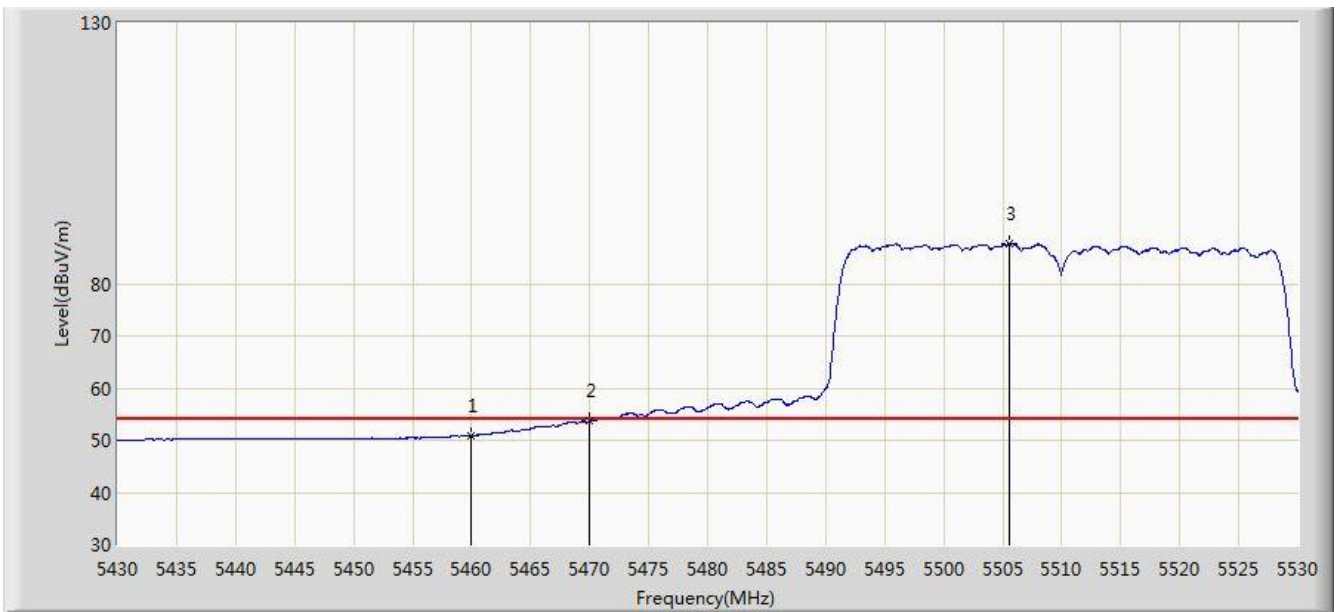


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.929	11.293	-3.071	54.000	39.636	AV
2			5470.000	53.642	13.988	-0.358	54.000	39.654	AV
3		*	5505.550	87.786	48.065	N/A	N/A	39.721	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 05:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 1 + 2	

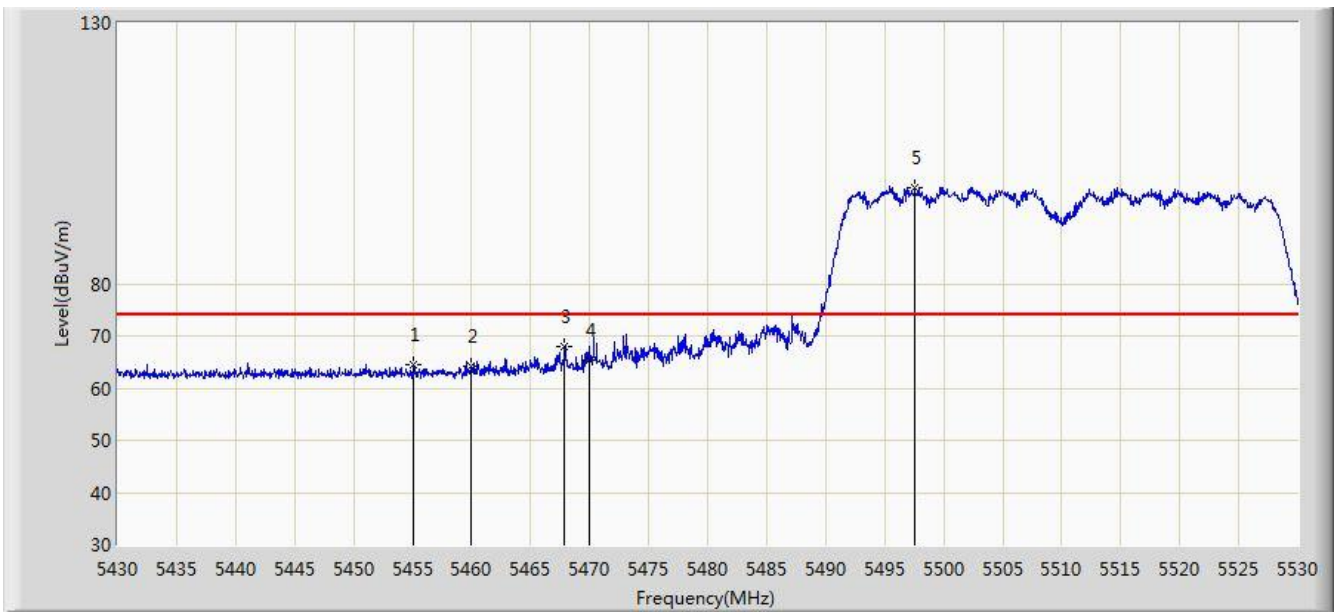


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.000	64.420	24.793	-9.580	74.000	39.627	PK
2			5460.000	64.178	24.542	-9.822	74.000	39.636	PK
3			5467.850	68.072	28.422	-5.928	74.000	39.651	PK
4			5470.000	65.353	25.699	-8.647	74.000	39.654	PK
5		*	5497.550	98.450	58.744	N/A	N/A	39.706	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 05:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz Ant 1 + 2	

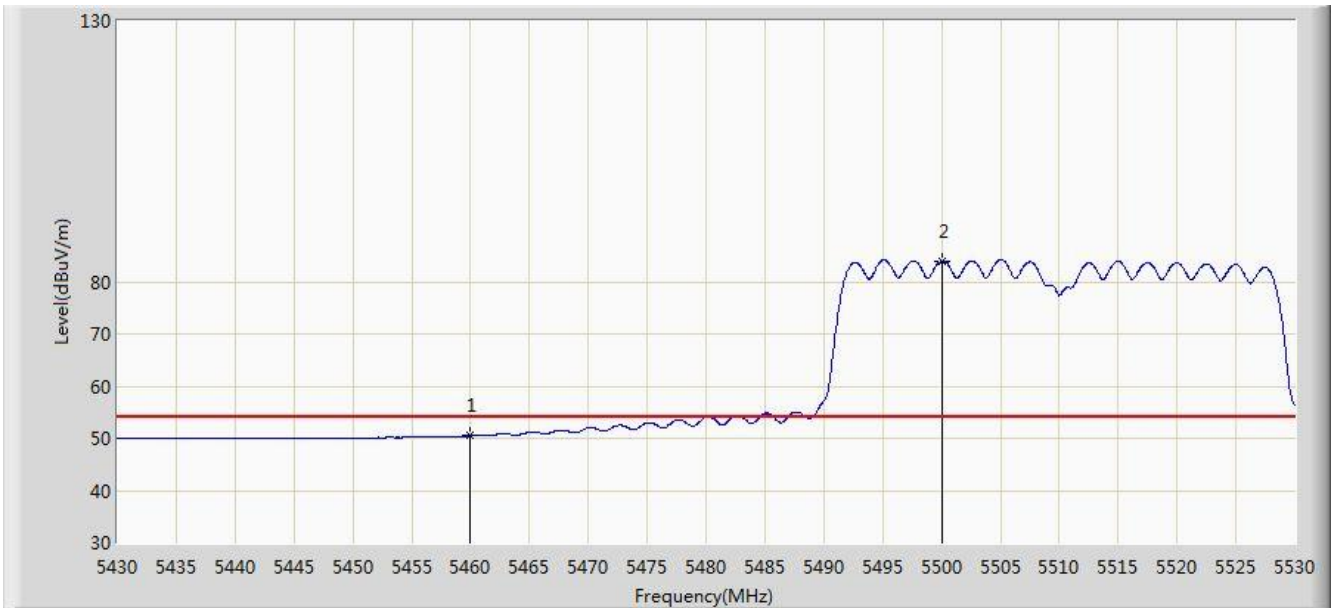


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.487	10.851	-3.513	54.000	39.636	AV
2		*	5500.000	83.901	44.191	N/A	N/A	39.710	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 05:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 1 + 2	

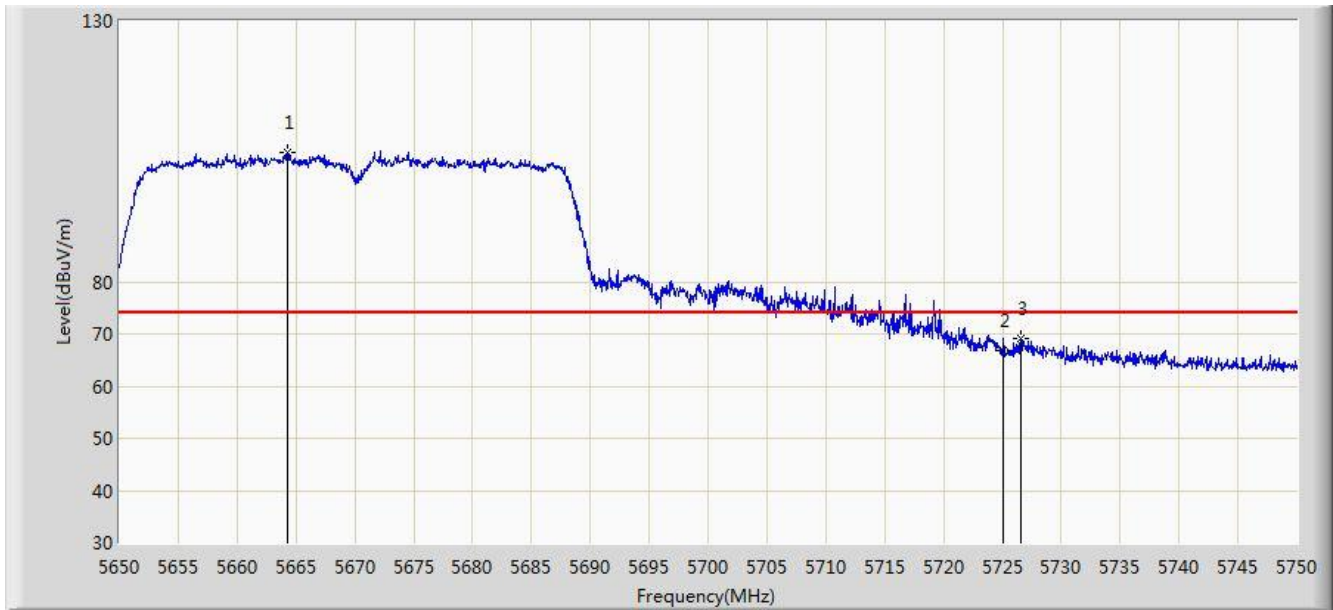


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5664.300	104.843	64.882	N/A	N/A	39.961	PK
2			5725.000	66.734	26.570	-7.266	74.000	40.164	PK
3			5726.550	69.223	29.052	-4.777	74.000	40.171	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 05:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 1 + 2	

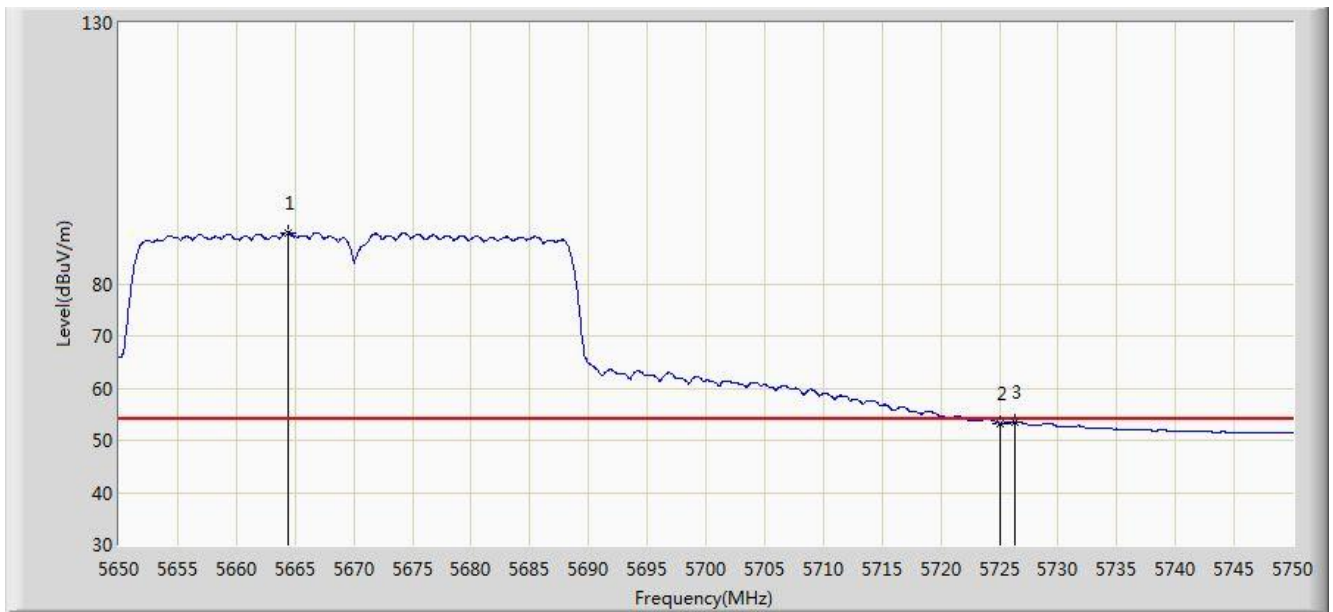


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5664.400	89.838	49.877	N/A	N/A	39.961	AV
2			5725.000	53.268	13.104	-0.732	54.000	40.164	AV
3			5726.300	53.584	13.414	-0.416	54.000	40.170	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 05:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 1 + 2	

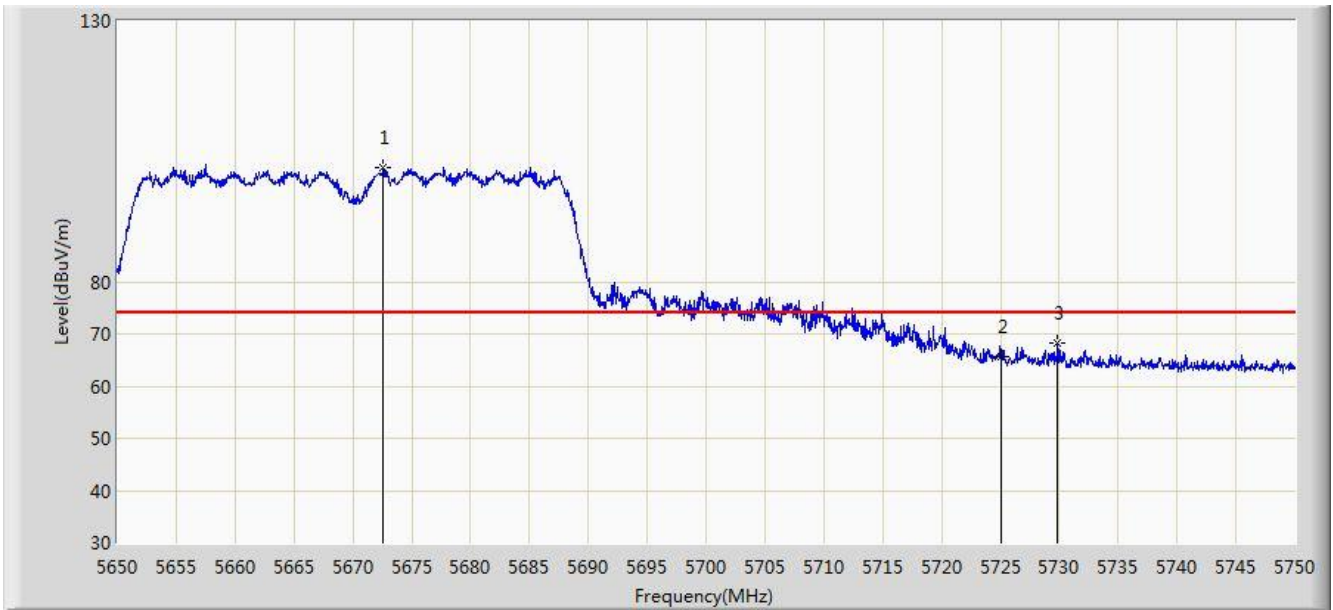


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5672.600	101.975	61.994	N/A	N/A	39.981	PK
2			5725.000	65.553	25.389	-8.447	74.000	40.164	PK
3			5729.850	68.189	28.003	-5.811	74.000	40.186	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 05:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz Ant 1 + 2	

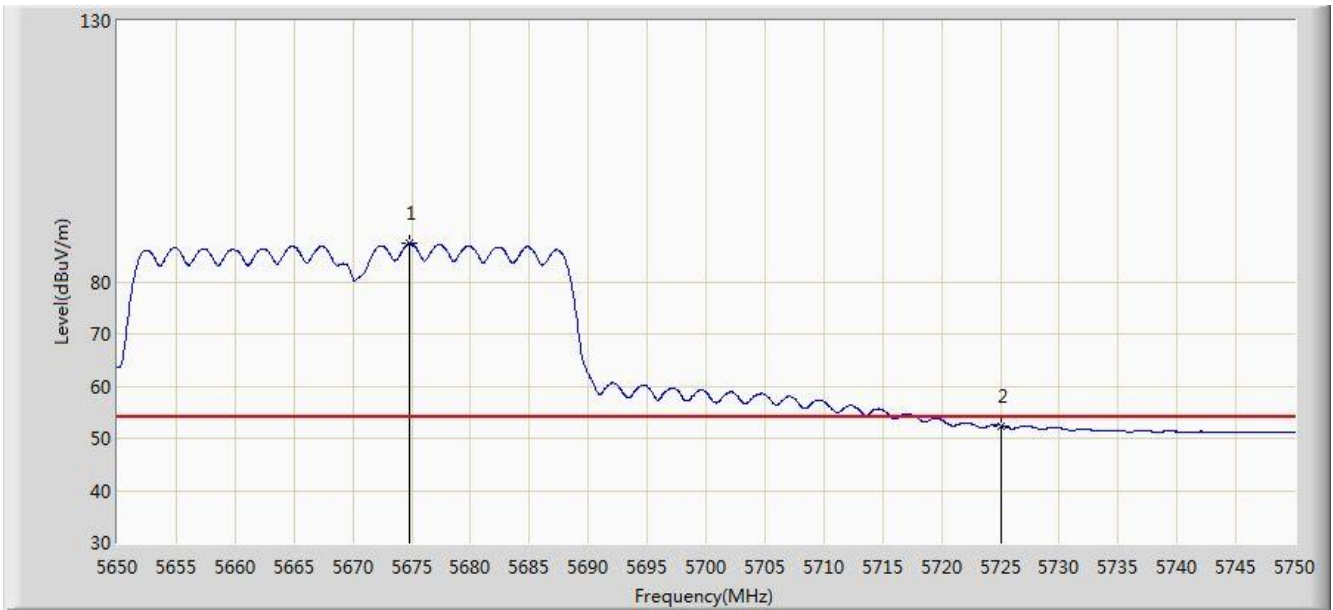


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5674.750	87.306	47.319	N/A	N/A	39.987	AV
2			5725.000	52.462	12.298	-1.538	54.000	40.164	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 06:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 1 + 2	

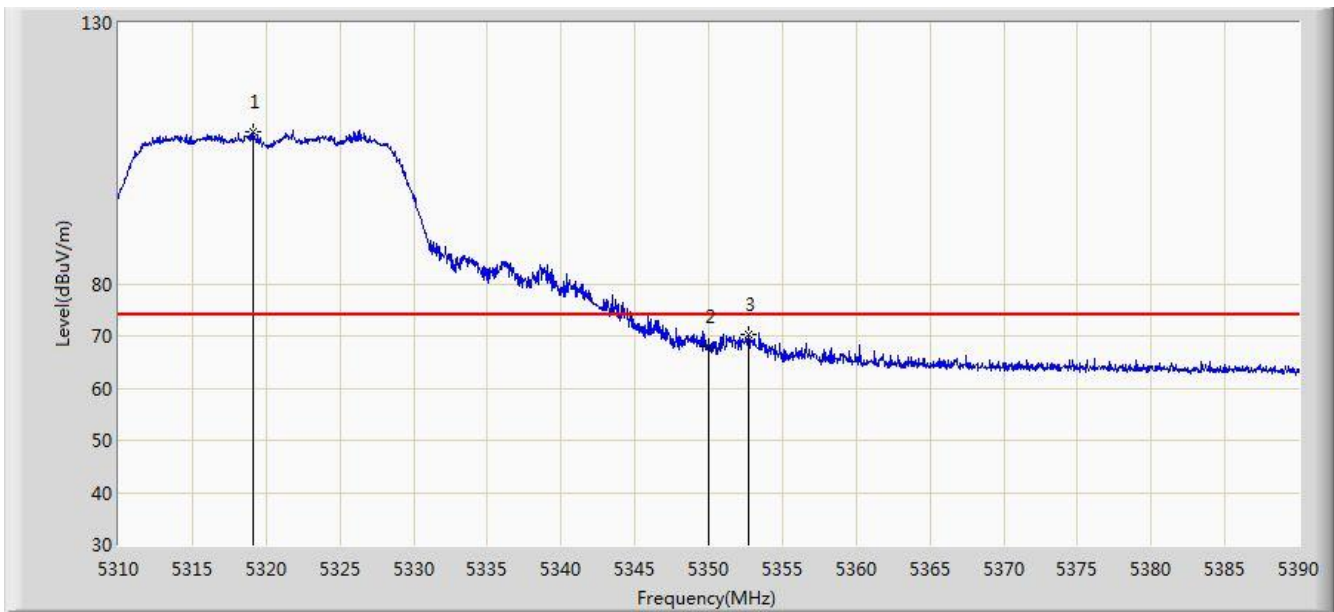


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5319.160	109.085	69.843	N/A	N/A	39.242	PK
2			5350.000	68.111	28.786	-5.889	74.000	39.324	PK
3			5352.680	70.375	31.043	-3.625	74.000	39.332	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 06:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 1 + 2	

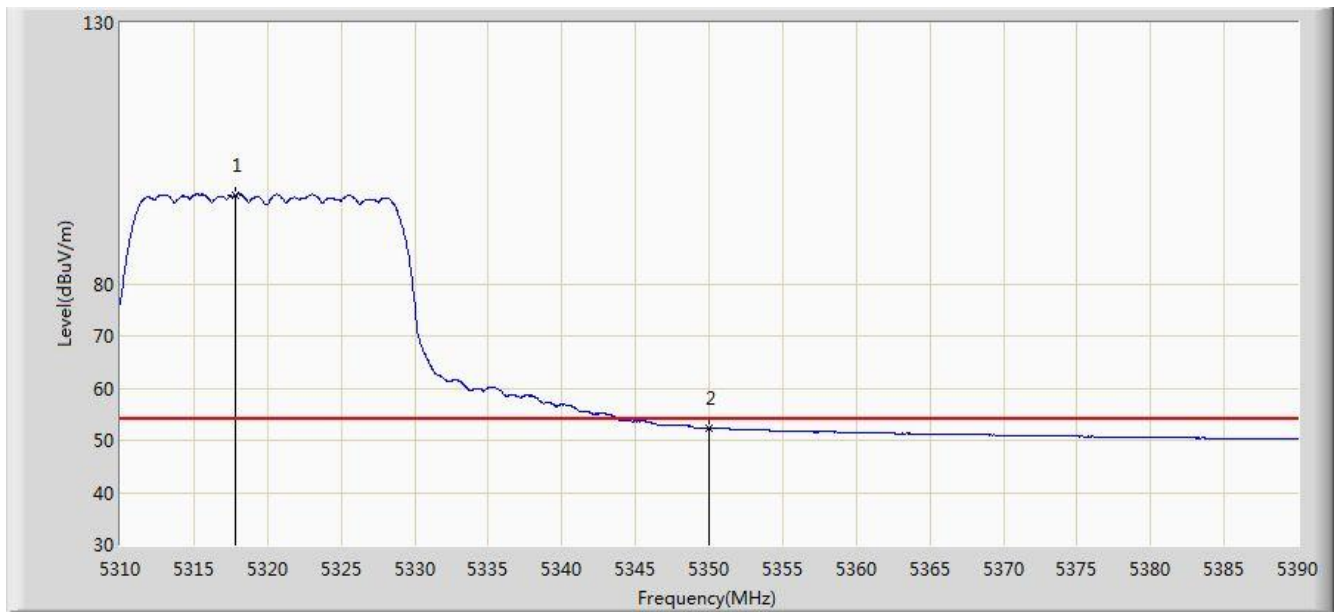


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.800	96.959	57.720	N/A	N/A	39.239	AV
2			5350.000	52.420	13.095	-1.580	54.000	39.324	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 06:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 1 + 2	

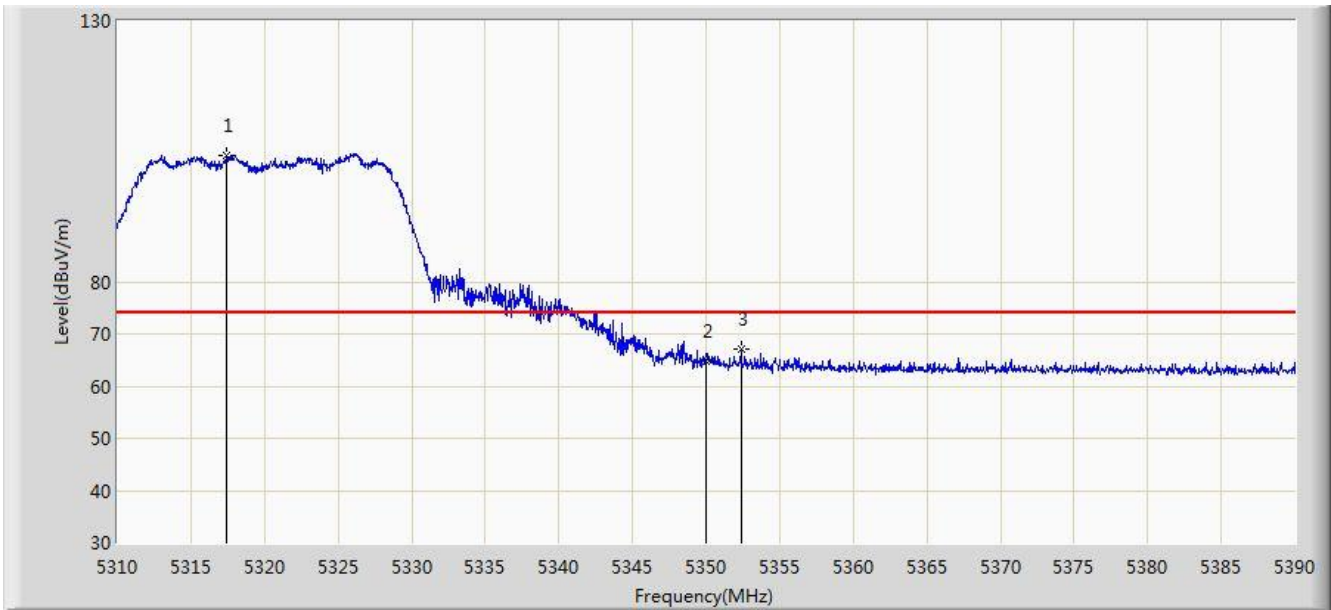


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.440	104.186	64.948	N/A	N/A	39.238	PK
2			5350.000	64.715	25.390	-9.285	74.000	39.324	PK
3			5352.360	67.234	27.903	-6.766	74.000	39.331	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 06:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz Ant 1 + 2	

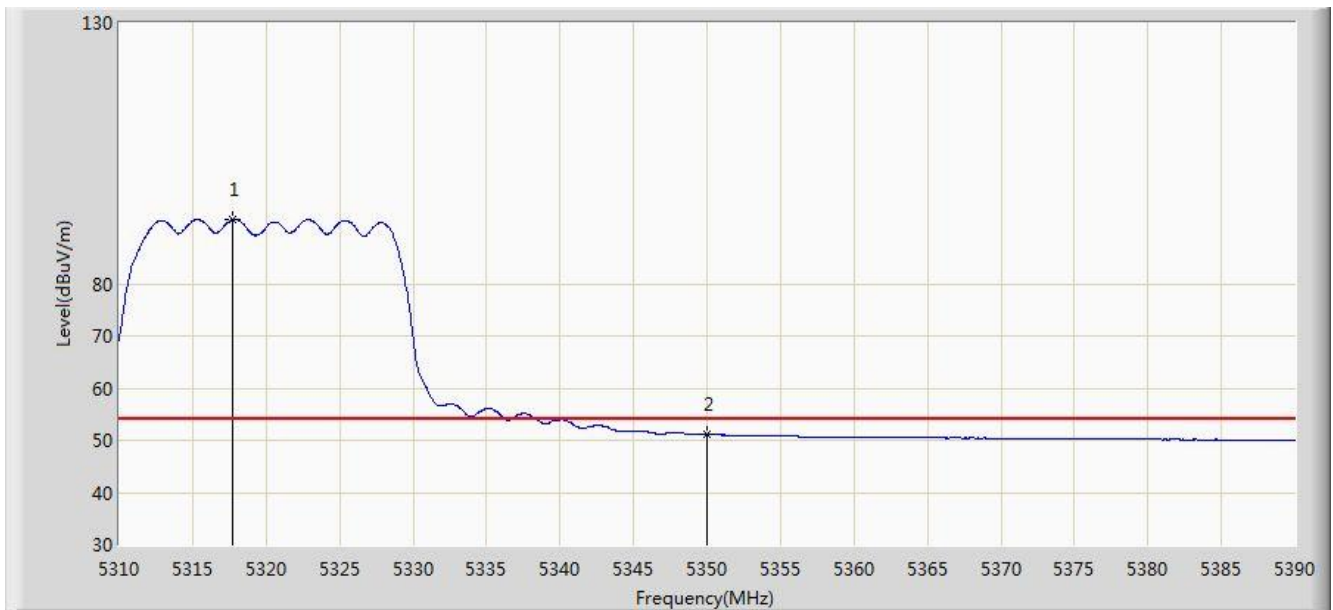


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.720	92.296	53.058	N/A	N/A	39.239	AV
2			5350.000	51.080	11.755	-2.920	54.000	39.324	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 06:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 1 + 2	

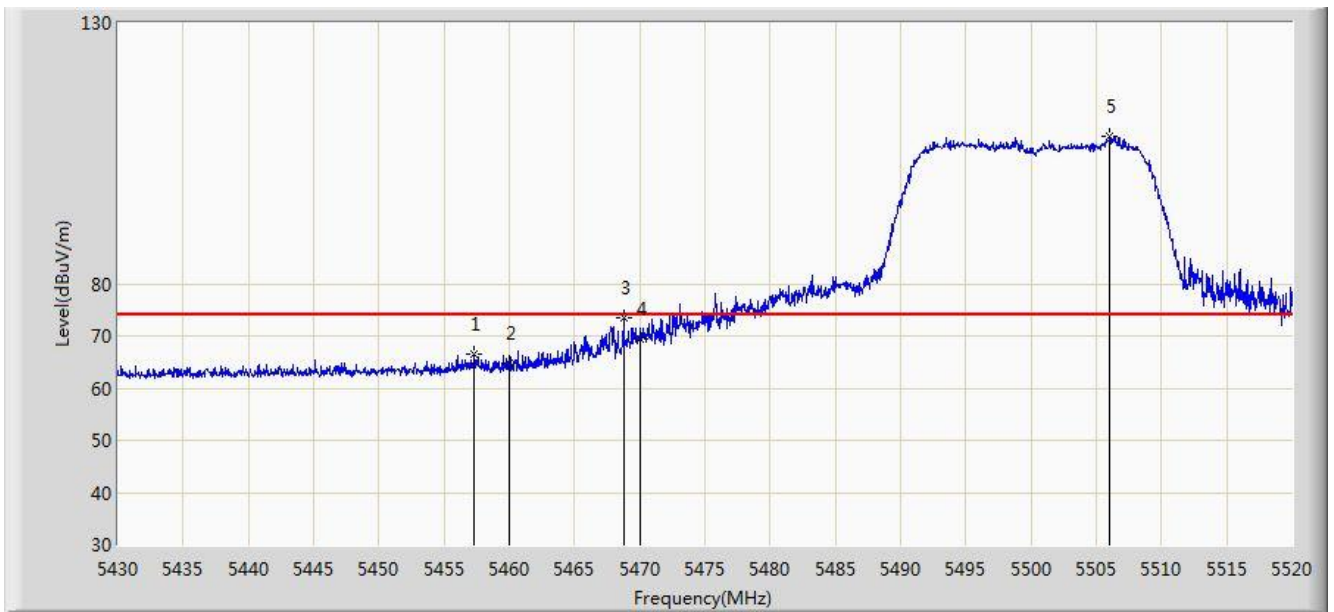


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.315	66.546	26.915	-7.454	74.000	39.631	PK
2			5460.000	64.702	25.066	-9.298	74.000	39.636	PK
3			5468.745	73.526	33.874	-0.474	74.000	39.652	PK
4			5470.000	69.418	29.764	-4.582	74.000	39.654	PK
5		*	5506.050	108.177	68.456	N/A	N/A	39.721	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 06:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 1 + 2	

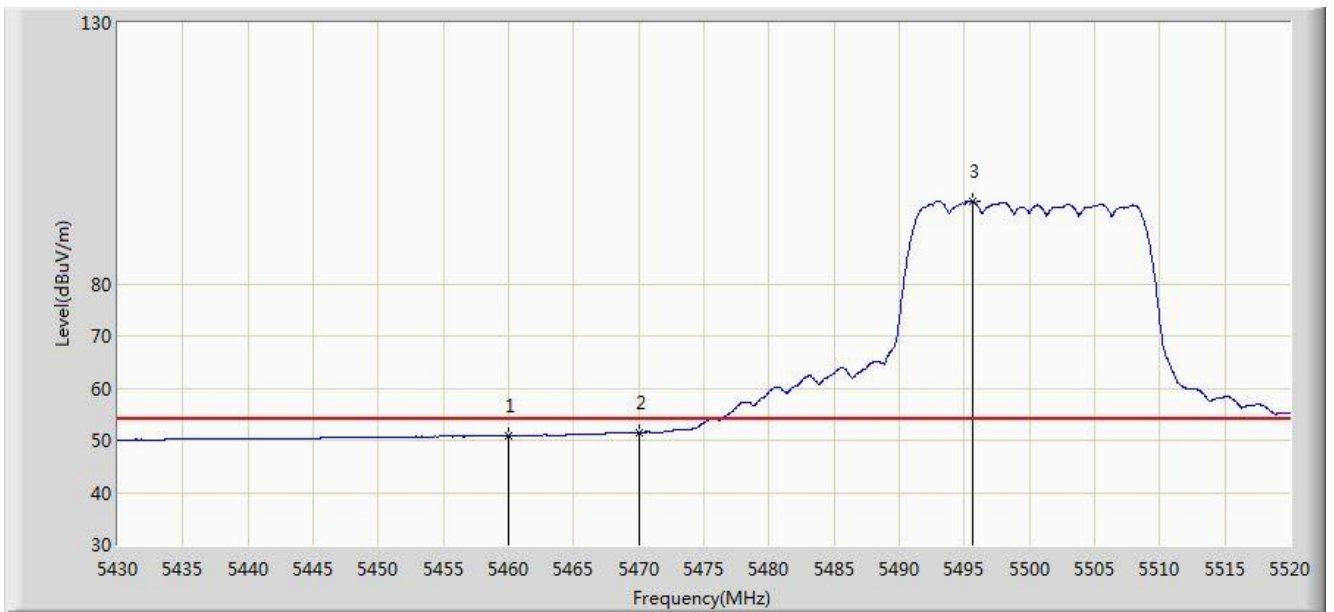


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.871	11.235	-3.129	54.000	39.636	AV
2			5470.000	51.550	11.896	-2.450	54.000	39.654	AV
3		*	5495.610	95.806	56.104	N/A	N/A	39.703	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 06:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 1 + 2	

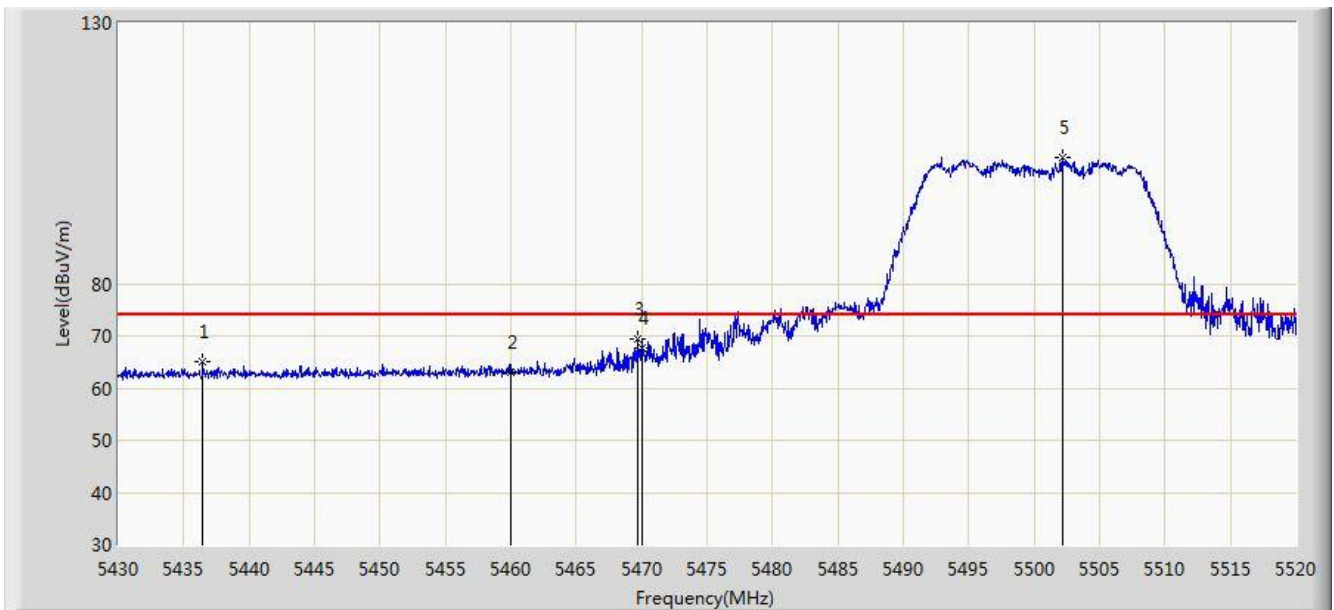


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5436.435	65.003	25.429	-8.997	74.000	39.574	PK
2			5460.000	63.134	23.498	-10.866	74.000	39.636	PK
3			5469.690	69.339	29.685	-4.661	74.000	39.654	PK
4			5470.000	67.776	28.122	-6.224	74.000	39.654	PK
5		*	5502.225	104.290	64.576	N/A	N/A	39.714	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 06:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz Ant 1 + 2	

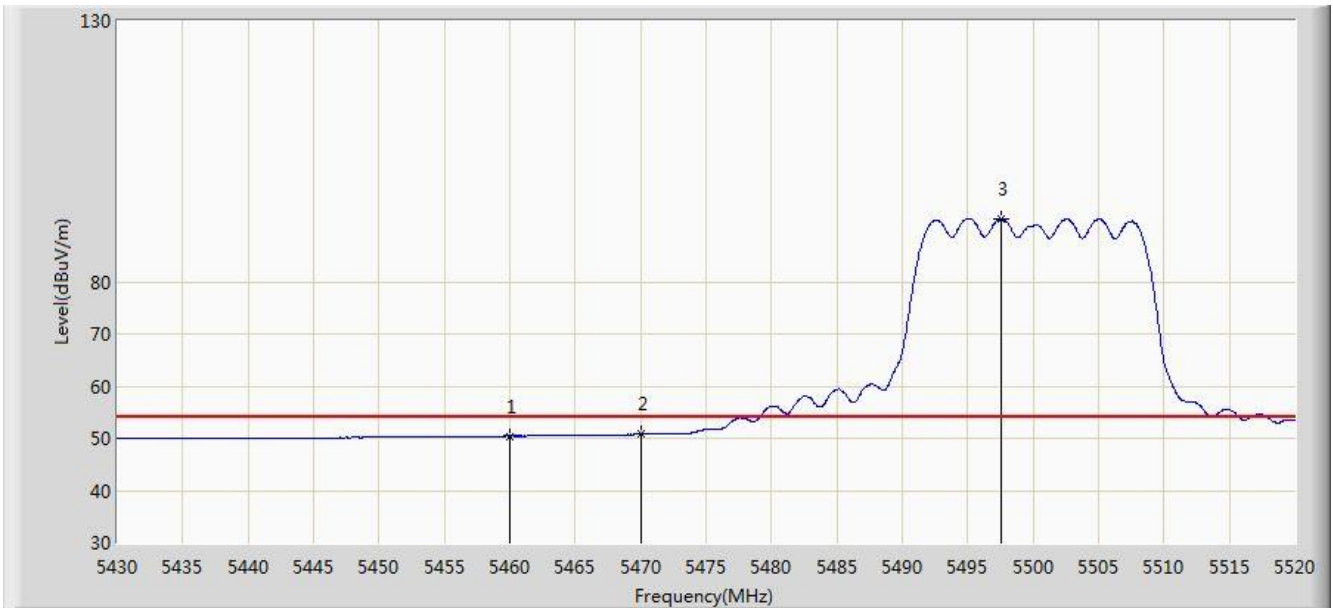


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.431	10.795	-3.569	54.000	39.636	AV
2			5470.000	50.757	11.103	-3.243	54.000	39.654	AV
3		*	5497.545	92.157	52.451	N/A	N/A	39.706	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 06:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 1 + 2	

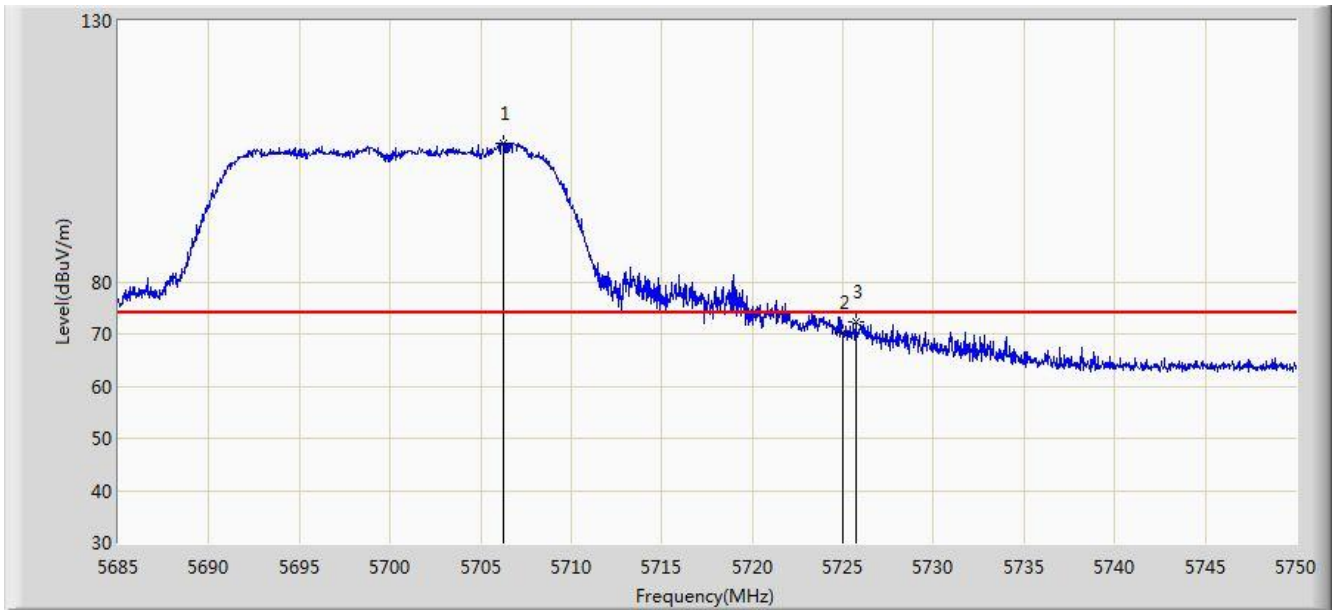


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5706.288	106.640	66.560	N/A	N/A	40.080	PK
2			5725.000	70.152	29.988	-3.848	74.000	40.164	PK
3			5725.723	72.408	32.241	-1.592	74.000	40.167	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 06:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 1 + 2	

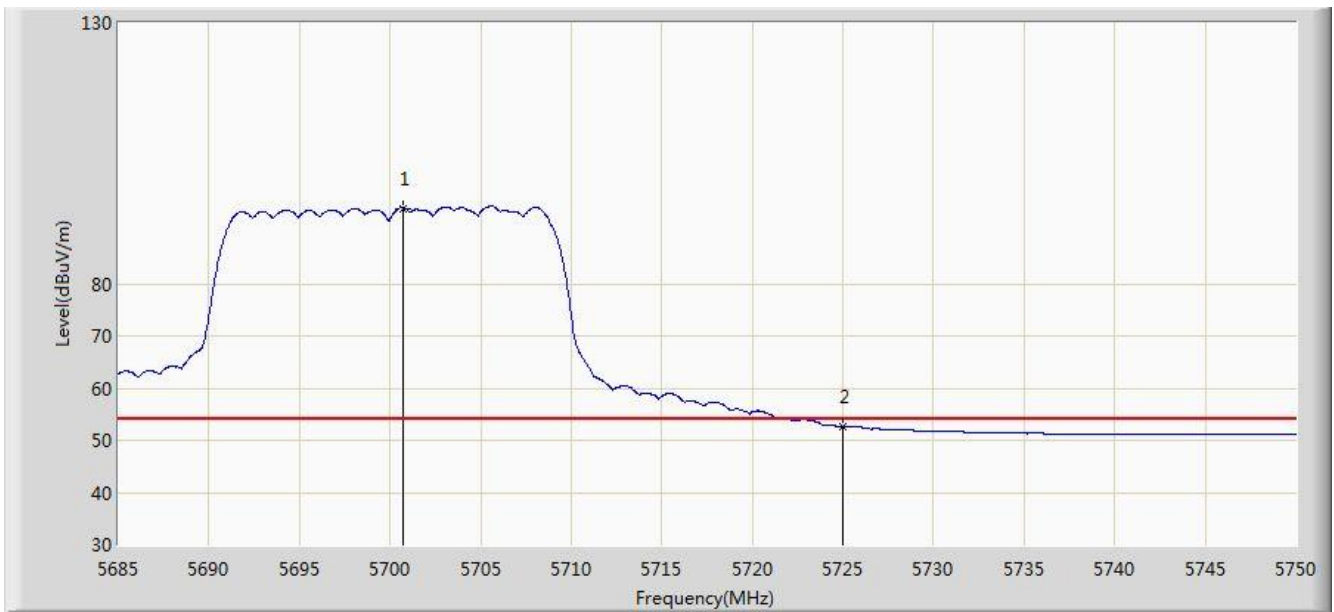


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5700.730	94.479	54.419	N/A	N/A	40.060	AV
2			5725.000	52.601	12.437	-1.399	54.000	40.164	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2016/12/24 - 06:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: By POE Adapter
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz Ant 1 + 2	

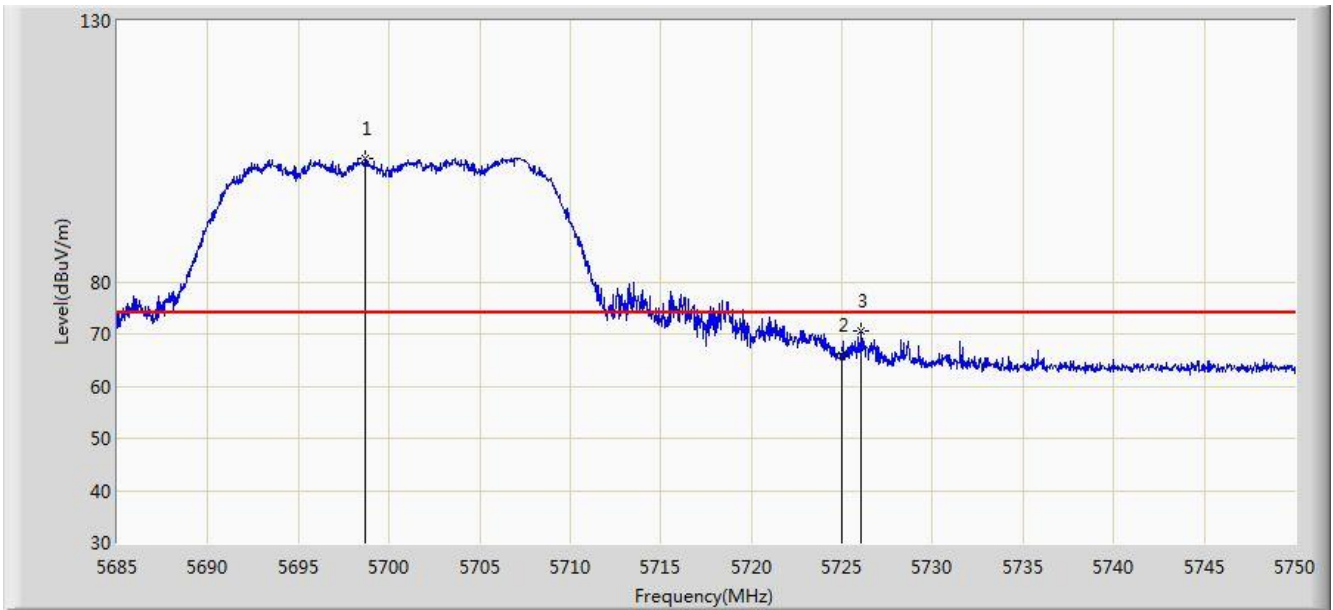

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.683	103.595	63.543	N/A	N/A	40.052	PK
2			5725.000	65.989	25.825	-8.011	74.000	40.164	PK
3			5726.047	70.582	30.413	-3.418	74.000	40.169	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)