

EMC Test Report

Application for Grant of Equipment Authorization

FCC Part 15, Subpart E

Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points

FCC ID: Q9DAPINH205

APPLICANT: Aruba Networks
1344 Crossman Ave
Sunnyvale, CA 94089

TEST SITE(S): National Technical Systems - Silicon Valley
41039 Boyce Road.
Fremont, CA. 94538-2435

IC SITE REGISTRATION #: 2845B-3; 2845B-4

REPORT DATE: January 26, 2015


REISSUE DATE: June 29, 2015

FINAL TEST DATES: December 16, 17, 18, 19, 22 and 23, 2014 and
January 5, 2015


TOTAL NUMBER OF PAGES: 123

PROGRAM MGR /
TECHNICAL REVIEWER:

QUALITY ASSURANCE DELEGATE /
FINAL REPORT PREPARER:

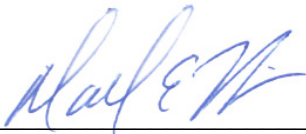

Mark E Hill
Staff Engineer

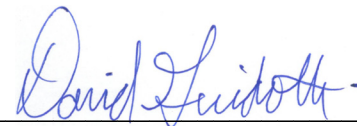

David Guidotti
Senior Technical Writer



National Technical Systems - Silicon Valley is accredited by the A2LA, certificate number 0214.26, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

REVISION HISTORY

Rev#	Date	Comments	Modified By
	January 26, 2015	First release	
1.0	June 29, 2015	Clarified the output power measurement procedure. Clarified the use of duty cycle correction for spurious emissions measurements. Updated EUT operation during AC conducted emissions.	MEH

TABLE OF CONTENTS

REVISION HISTORY	2
TABLE OF CONTENTS	3
SCOPE	4
OBJECTIVE	4
STATEMENT OF COMPLIANCE	5
DEVIATIONS FROM THE STANDARDS	5
TEST RESULTS SUMMARY	6
UNII / LELAN DEVICES	6
GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS.....	8
MEASUREMENT UNCERTAINTIES.....	9
EQUIPMENT UNDER TEST (EUT) DETAILS	10
GENERAL.....	10
OTHER EUT DETAILS.....	10
ANTENNA SYSTEM	10
ENCLOSURE.....	10
MODIFICATIONS.....	10
SUPPORT EQUIPMENT.....	11
EUT INTERFACE PORTS	11
EUT OPERATION	12
TEST SITE	13
GENERAL INFORMATION.....	13
CONDUCTED EMISSIONS CONSIDERATIONS	13
RADIATED EMISSIONS CONSIDERATIONS	13
MEASUREMENT INSTRUMENTATION	14
RECEIVER SYSTEM	14
INSTRUMENT CONTROL COMPUTER	14
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	14
FILTERS/ATTENUATORS	15
ANTENNAS.....	15
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	15
INSTRUMENT CALIBRATION.....	15
TEST PROCEDURES	16
EUT AND CABLE PLACEMENT	16
CONDUCTED EMISSIONS.....	16
RADIATED EMISSIONS.....	16
CONDUCTED EMISSIONS FROM ANTENNA PORT	20
BANDWIDTH MEASUREMENTS	20
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS	21
GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS	22
RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS	22
FCC 15.407 (A) OUTPUT POWER LIMITS	22
OUTPUT POWER LIMITS –LELAN DEVICES.....	23
SPURIOUS EMISSIONS LIMITS –UNII AND LELAN DEVICES	23
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS	23
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	24
SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION.....	25
APPENDIX A TEST EQUIPMENT CALIBRATION DATA	26
APPENDIX B TEST DATA	28
END OF REPORT	123

SCOPE

An electromagnetic emissions test has been performed on the Aruba Networks model APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points, pursuant to the following rules:

FCC Part 15, Subpart E requirements for UNII Devices

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in National Technical Systems - Silicon Valley test procedures:

ANSI C63.10-2009

FCC General UNII Test Procedures KDB789033

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, all unlicensed transmitters and transceivers require certification. Receive-only devices operating between 30 MHz and 960 MHz are subject to either certification or a manufacturer's declaration of conformity, with all other receive-only devices exempt from the technical requirements.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

Testing was performed only on model APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points. This model was considered representative of the following models.

STATEMENT OF COMPLIANCE

The tested sample of Aruba Networks model APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points complied with the requirements of the following regulations:

FCC Part 15, Subpart E requirements for UNII Devices

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

The test results recorded herein are based on a single type test of Aruba Networks model APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points and therefore apply only to the tested sample. The sample was selected and prepared by Tian Mendez of Aruba Networks.

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

TEST RESULTS SUMMARY

UNII / LELAN DEVICES

Operation in the 5.25 – 5.35 GHz Band

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.407(a) (2)		26dB Bandwidth	a: 20.1 MHz n20: 20.1 MHz n40: 39.5 MHz ac80: 82.1 MHz	N/A – limits output power if < 20MHz	N/A
15.407(a) (2)	-	Output Power	a: 104.5 mW n20: 116 mW n40: 104.5 mW ac80:75.3mw (Max eirp: 26.64 dBm (461.88 mW))	24 dBm / 250mW (eirp < 30dBm)	Complies
15.407(a) (2)	-	Power Spectral Density	a: 7.7 dBm/MHz n20: 7.98 dBm/MHz n40: 4.4 dBm/MHz ac80:0.1dBm/MHz	11 dBm/MHz	Complies

Operation in the 5.47 – 5.725 GHz Band

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.407(a) (2)		26dB Bandwidth	a: 20.1 MHz n20: 20.3 MHz n40: 39.2 MHz ac80: 81.3 MHz	N/A – limits output power if < 20MHz	N/A
15.407(a) (2)	-	Output Power	a: 106.8 mW n20: 114.5 mW n40: 131.8 mW ac80:200.5mw (Max eirp: 29.02 dBm (798.26 mW))	24 dBm / 250mW (eirp < 30dBm)	Complies
15.407(a) (2)		Power Spectral Density	a: 7.95 dBm/MHz n20: 7.8 dBm/MHz n40: 5.6 dBm/MHz ac80:4.1dBm/MHz	11 dBm/MHz	Complies

Requirements for all U-NII/LELAN bands

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.407	-	Modulation	Digital Modulation is used	Digital modulation is required	Complies
15.407(b) (5) / 15.209	-	Spurious Emissions	68.2 dB μ V/m @ 5725.3 MHz (-0.1 dB)	Refer to page 23	Complies
15.407 (c)	-	Operation in the absence of information to transmit	Operation is discontinued in the absence of information	Device shall automatically discontinue operation in the absence of information to transmit	Complies
15.407 (g)	-	Frequency Stability	Frequency stability is +/- 20ppm	Signal shall remain within the allocated band	Complies
15.407 (h1)	-	Transmit Power Control	TPC mechanism is discussed in the Operational Description	The U-NII device shall have the capability to operate with a mean EIRP value lower than 24dBm (250mW)	Complies
15.407 (h2)	-	Dynamic frequency Selection (device with radar detection)	Refer to separate test report, reference R97364	Threshold -62dBm (-64dBm if eirp > 200mW) Channel Availability Check > 60s Channel closing transmission time < 260ms Channel move time < 10s Non occupancy period > 30minutes	Complies

GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS

FCC Rule Part	RSS Rule part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.203	-	RF Connector	Antennas are internal and integral to the device	Unique or integral antenna required	Complies
15.207	RSS GEN Table 3	AC Conducted Emissions	40.0 dB μ V @ 0.455 MHz (-6.8 dB)		Complies
15.247 (b) (5) 15.407 (f)	RSS 102	RF Exposure Requirements	Refer to MPE calculations in separate exhibit, RSS 102 declaration and User Manual statements.	Refer to OET 65, FCC Part 1 and RSS 102	Complies

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with UKAS document LAB 34.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
RF power, conducted (power meter)	dBm	25 to 7000 MHz	± 0.52 dB
RF power, conducted (Spectrum analyzer)	dBm	25 to 7000 MHz	± 0.7 dB
Conducted emission of transmitter	dBm	25 to 26500 MHz	± 0.7 dB
Conducted emission of receiver	dBm	25 to 26500 MHz	± 0.7 dB
Radiated emission (substitution method)	dBm	25 to 26500 MHz	± 2.5 dB
Radiated emission (field strength)	dB μ V/m	25 to 1000 MHz	± 3.6 dB
		1000 to 40000 MHz	± 6.0 dB
Conducted Emissions (AC Power)	dB μ V	0.15 to 30 MHz	± 2.4 dB

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Aruba Networks model APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points is a high-performance dual radio wireless and wired access point for hospitality and branch deployments.

The sample was received on December 10, 2014 and tested on December 16, 17, 18, 19, 22 and 23, 2014 and January 5, 2015. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
Aruba	APINH202-2x2:2	2.4GHz/5GHz AP	L.AYM4A30030 (NTS Sample: 2014-2977)	Q9DAPINH205
Aruba	APINH202-2x2:2	2.4GHz/5GHz AP	L.AYM4A30017 (NTS Sample: 2014-2981)	Q9DAPINH205
Aruba	APINH202-2x2:2	2.4GHz/5GHz AP	Prototype (NTS Sample: 2014-2278)	Q9DAPINH205
Aruba	APINH202-2x2:2	2.4GHz/5GHz AP	Prototype (NTS Sample: 2273)	Q9DAPINH205

OTHER EUT DETAILS

802.11AC 2x2 dual radio access point

One radio fixed 2.4GHz, second radio fixed 5GHz

Radios can transmit simultaneous

Each radio is 2x2, does not support 1Tx modes

2.4GHz radio supports 11b/11g/n20/n40 data rates

5GHz radio supports 11a/n20/n40/VHT20/VHT40/VHT80 data rates

Operation on CH144 (20MHz), CH142 (40MHz), CH138 (80MHz) is supported

DFS Master Device

Indoor Use only

Internal antennas

ANTENNA SYSTEM

The antenna system consists of: Metal Sheet with 4dBi Gain Antennas for 2.4GHz Band and 6dBi Antenna for 5GHz Band

ENCLOSURE

The EUT enclosure measures approximately 15.5 by 9 by 4.3 centimeters. It is primarily constructed of uncoated plastic.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at NTS Silicon Valley.

SUPPORT EQUIPMENT

The following equipment was used as support equipment for testing:

Company	Model	Description	Serial Number	FCC ID
LTE LI TONE Electronics	LTE36E-S5-1	AC/DC Power Supply	-	-
IBM	Thinkpad T43	Laptop Computer	2669UYP	
-	-	USB/Serial Adapter		

The following equipment was used as remote support equipment for emissions testing:

Company	Model	Description	Serial Number	FCC ID
IBM	Thinkpad T43	Laptop Computer*	2669UYP	

* - Laptop was located remotely during the AC conducted emissions test.

EUT INTERFACE PORTS

The I/O cabling configuration during testing was as follows:

Port	Connected To	Description	Cable(s)	
			Shielded or Unshielded	Length(m)
DC Power In	AC/DC Adapter	2Wire	Unshielded	1.9
Serial	USB/Serial Adapter / Remote Laptop	Multiconductor	Shielded	5.0
USB	Not connected	-	-	-
Ethernet (x4) Bottom	Not connected	-	-	-
ENET0 (back)	Not connected	-	-	-
Pass Through (back)	Not connected	-	-	-

AC Conducted Emissions

Port	Connected To	Description	Cable(s)	
			Shielded or Unshielded	Length(m)
DC Power In	AC/DC Adapter	2Wire	Unshielded	1.9
Serial	USB/Serial Adapter	Multiconductor	Shielded	5.0
USB	Not connected	-	-	-
Ethernet (x3) Bottom	Not connected	-	-	-
Ethernet Bottom	Remote laptop	CAT5	Unshielded	5.0
ENET0 (back)	Not connected	-	-	-
Pass Through (back)	Not connected	-	-	-

Note – preliminary testing showed that the addition of cables did not affect the radio related emissions.

Serial cable would not be used in normal operation. It was connected to allow for control of the radio for testing purposes.

EUT OPERATION

The laptop computer was used to configure the system for continuous transmission via the serial connection. The EUT was configured to transmit continuously at the channel noted at the worse case data rate for the mode under test. Power was set to the maximum. In some cases, the test was performed at a higher output level than the final regulatory power. The results for output power are the final regulatory powers.

TEST SITE**GENERAL INFORMATION**

Final test measurements were taken at the test sites listed below. Pursuant to section 2.948 of the FCC's Rules and section 3.3 of RSP-100, construction, calibration, and equipment data has been filed with the Commission and with industry Canada.

Site	Designation / Registration Numbers		Location
	FCC	Canada	
Chamber 3	US0027	2845B-3	41039 Boyce Road Fremont, CA 94538-2435
Chamber 4	US0027	2845B-4	
Chamber 5	US0027	2845B-5	
Chamber 7	US0027	2845B-7	

ANSI C63.4 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement. The test site(s) contain separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.10. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment or in a semi-anechoic chamber. The test sites are maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4 guidelines and meet the Normalized Site Attenuation (NSA) requirements of ANSI C63.4.

MEASUREMENT INSTRUMENTATION

RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements. If the repetition frequency of the signal being measured is below 20Hz, peak measurements are made in lieu of Quasi-Peak measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz, unless the signal is pulsed in which case the average (or video) bandwidth of the measuring instrument is reduced to onset of pulse desensitization and then increased.

INSTRUMENT CONTROL COMPUTER

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A loop antenna is used below 30 MHz. For the measurement range 30 MHz to 1000 MHz either a combination of a biconical antenna and a log periodic or a bi-log antenna is used. Above 1000 MHz, horn antennas are used. The antenna calibration factors to convert the received voltage to an electric field strength are included with appropriate cable loss and amplifier gain factors to determine an overall site factor, which is then programmed into the test receivers or incorporated into the test software.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. Measurements below 30 MHz are made with the loop antenna at a fixed height of 1m above the ground plane.

ANSI C63.10 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor as specified in ANSI C63.4. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES

EUT AND CABLE PLACEMENT

The regulations require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.10, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

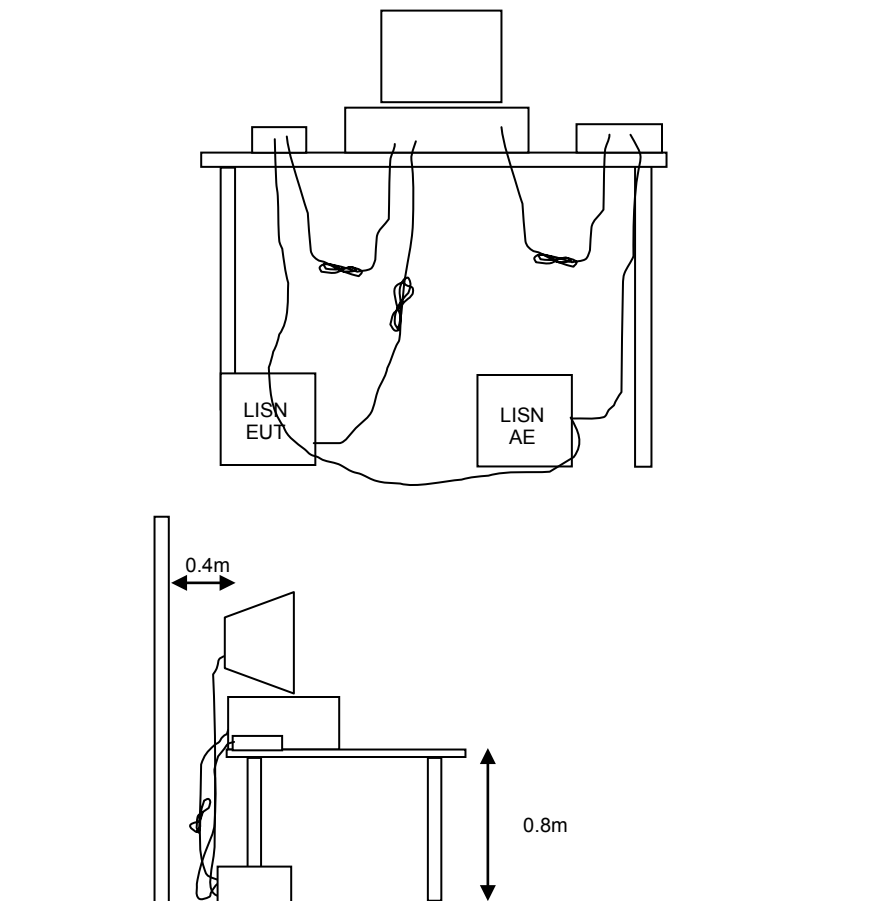


Figure 1 Typical Conducted Emissions Test Configuration


RADIATED EMISSIONS

A preliminary scan of the radiated emissions is performed in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one scan for each antenna polarization (horizontal and vertical; loop parallel and perpendicular to the EUT). During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied (for measurements above 30 MHz) and cable positions are varied to determine the highest emission relative to the limit. Preliminary scans may be performed in a fully anechoic chamber for the purposes of identifying the frequencies of the highest emissions from the EUT.


A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters (for measurements above 30 MHz, measurements below 30 MHz are made with the loop antenna at a fixed height of 1m). The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain.

When testing above 18 GHz, the receive antenna is located at 1 meter from the EUT and the antenna height is restricted to a maximum of 2.5 meters.

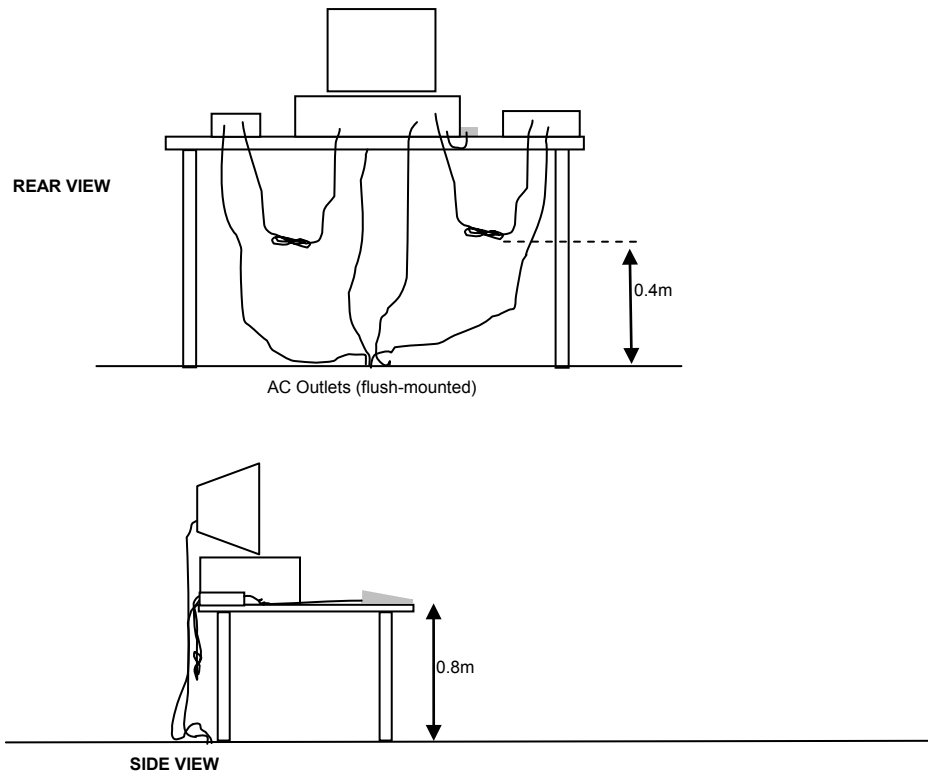


Typical Test Configuration for Radiated Field Strength Measurements

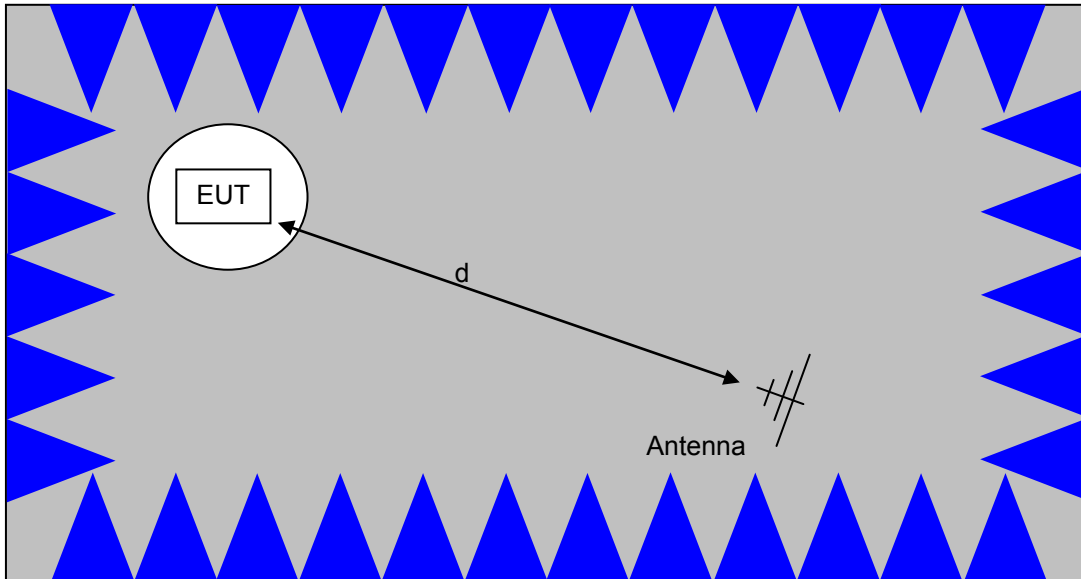

The anechoic materials on the walls and ceiling ensure compliance with the normalized site attenuation requirements of CISPR 16 / CISPR 22 / ANSI C63.4 for an alternate test site at the measurement distances used.


Floor-standing equipment is placed on the floor with insulating supports between the unit and the ground plane.

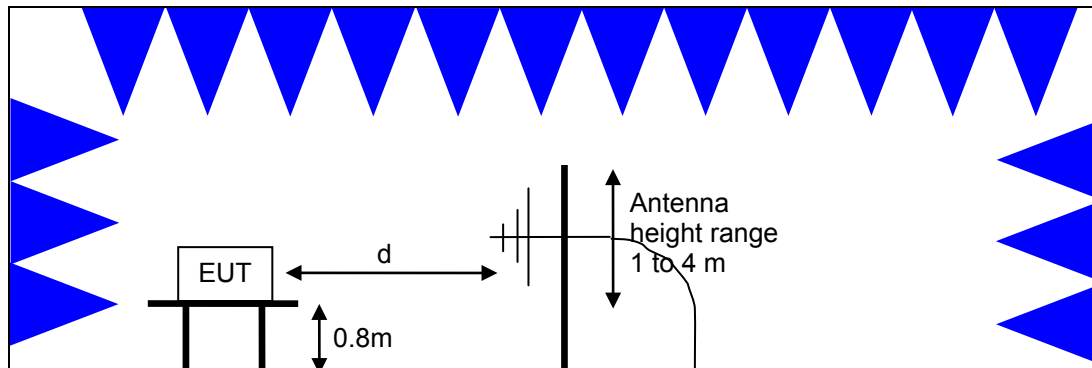

Test Configuration for Radiated Field Strength Measurements
Semi-Anechoic Chamber, Plan and Side Views

CONDUCTED EMISSIONS FROM ANTENNA PORT

Direct measurements of power, bandwidth and power spectral density are performed, where possible, with the antenna port of the EUT connected to either the power meter or spectrum analyzer via a suitable attenuator and/or filter. These are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission.

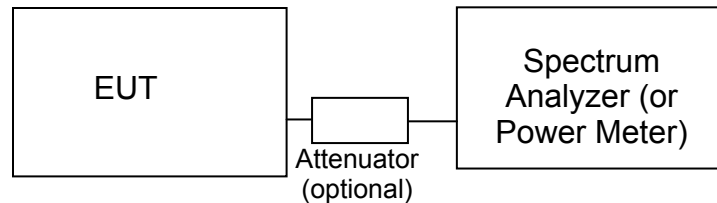Test Configuration for Antenna Port Measurements

Measurement bandwidths (video and resolution) are set in accordance with the relevant standards and NTS Silicon Valley's test procedures for the type of radio being tested. When power measurements are made using a resolution bandwidth less than the signal bandwidth the power is calculated by summing the power across the signal bandwidth using either the analyzer channel power function or by capturing the trace data and calculating the power using software. In both cases the summed power is corrected to account for the equivalent noise bandwidth (ENBW) of the resolution bandwidth used.

If power averaging is used (typically for certain digital modulation techniques), the EUT is configured to transmit continuously. Power averaging is performed using either the built-in function of the analyzer or, if the analyzer does not feature power averaging, using external software. In both cases the average power is calculated over a number of sweeps (typically 100). When the EUT cannot be configured to continuously transmit then either the analyzer is configured to perform a gated sweep to ensure that the power is averaged over periods that the device is transmitting or power averaging is disabled and a max-hold feature is used.

If a power meter is used to make output power measurements the sensor head type (peak or average) is stated in the test data table.

BANDWIDTH MEASUREMENTS

The 6dB, 20dB, 26dB and/or 99% signal bandwidth are measured using the bandwidths recommended by ANSI C63.10 and RSS GEN.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands¹ (with the exception of transmitters operating under FCC Part 15 Subpart D and RSS 210 Annex 9), the limits for all emissions from a low power device operating under the general rules of RSS 310 (tables 3 and 4), RSS 210 (table 2) and FCC Part 15 Subpart C section 15.209.

Frequency Range (MHz)	Limit (uV/m)	Limit (dBuV/m @ 3m)
0.009-0.490	2400/F _{KHz} @ 300m	67.6-20*log ₁₀ (F _{KHz}) @ 300m
0.490-1.705	24000/F _{KHz} @ 30m	87.6-20*log ₁₀ (F _{KHz}) @ 30m
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100 @ 3m	40 @ 3m
88 to 216	150 @ 3m	43.5 @ 3m
216 to 960	200 @ 3m	46.0 @ 3m
Above 960	500 @ 3m	54.0 @ 3m

RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from receivers as detailed in FCC Part 15.109, RSS 210 Table 2, RSS GEN Table 1 and RSS 310 Table 3. Note that receivers operating outside of the frequency range 30 MHz – 960 MHz are exempt from the requirements of 15.109.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

FCC 15.407 (a) OUTPUT POWER LIMITS

The table below shows the limits for output power and output power density. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
5150 – 5250	50mW (17 dBm)	4 dBm/MHz
5250 – 5350	250 mW (24 dBm)	11 dBm/MHz
5725 – 5825	1 Watts (30 dBm)	17 dBm/MHz

¹ The restricted bands are detailed in FCC 15.203, RSS 210 Table 1 and RSS 310 Table 2

For system using antennas with gains exceeding 6dBi, the output power and power spectral density limits are reduced by 1dB for every dB the antenna gain exceeds 6dBi. Fixed point-to-point applications using the 5725 – 5825 MHz band may use antennas with gains of up to 23dBi without this limitation. If the gain exceeds 23dBi then the output power limit of 1 Watt is reduced by 1dB for every dB the gain exceeds 23dBi.

The peak excursion envelope is limited to 13dB.

OUTPUT POWER LIMITS –LELAN DEVICES

The table below shows the limits for output power and output power density defined by RSS 210. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
5150 – 5250	200mW (23 dBm) eirp	10 dBm/MHz eirp
5250 – 5350	250 mW (24 dBm) ² 1W (30dBm) eirp	11 dBm/MHz
5470 – 5725	250 mW (24 dBm) ³ 1W (30dBm) eirp	11 dBm/MHz
5725 – 5825	1 Watts (30 dBm) 4W eirp	17 dBm/MHz

In addition, the power spectral density limit shall be reduced by 1dB for every dB the highest power spectral density exceeds the “average” power spectral density) by more than 3dB. The “average” power spectral density is determined by dividing the output power by $10\log(\text{EBW})$ where EBW is the 99% power bandwidth.

Fixed point-to-point applications using the 5725 – 5825 MHz band may use antennas with gains of up to 23dBi without this limitation. If the gain exceeds 23dBi then the output power limit of 1 Watt is reduced by 1dB for every dB the gain exceeds 23dBi.

SPURIOUS EMISSIONS LIMITS –UNII and LELAN DEVICES

The spurious emissions limits for signals below 1GHz are the FCC/RSS-GEN general limits. For emissions above 1GHz, signals in restricted bands are subject to the FCC/RSS GEN general limits. All other signals have a limit of –27dBm/MHz, which is a field strength of 68.3dBuV/m/MHz at a distance of 3m. For devices operating in the 5725-5850Mhz bands under the LELAN/UNII rules, the limit within 10MHz of the allocated band is increased to –17dBm/MHz.

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - S = M$$

² If EIRP exceeds 500mW the device must employ TPC

³ If EIRP exceeds 500mW the device must employ TPC

where:

R_r = Receiver Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor, when used for electric field measurements above 30MHz, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

F_d = Distance Factor in dB

D_m = Measurement Distance in meters

D_s = Specification Distance in meters

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \text{LOG}_{10} (D_m/D_s)$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

R_r = Receiver Reading in dBuV/m

F_d = Distance Factor in dB

R_c = Corrected Reading in dBuV/m

L_s = Specification Limit in dBuV/m

M = Margin in dB Relative to Spec

SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp), or where a field strength measurement of output power is made in lieu of a direct measurement, the following formula is used to convert between eirp and field strength at a distance of d (meters) from the equipment under test:

$$E = \frac{1000000 \sqrt{30 P}}{d} \quad \text{microvolts per meter}$$

where P is the eirp (Watts)

For a measurement at 3m the conversion from a logarithmic value for field strength (dBuV/m) to an eirp power (dBm) is -95.3dB.

Appendix A Test Equipment Calibration Data

T96923

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Calibrated</u>	<u>Cal Due</u>
Radiated Emissions, 1,000 - 6,500 MHz, 17-Dec-14					
EMCO	Antenna, Horn, 1-18 GHz	3115	487	7/29/2014	7/29/2016
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	6/14/2014	6/14/2015
Radiated Emissions, 1 - 18 GHz, 19-Dec-14					
EMCO	Antenna, Horn, 1-18 GHz	3115	786	12/20/2013	12/20/2015
Hewlett Packard	High Pass filter, 8.2 GHz (Red System)	P/N 84300-80039 (84125C)	1152	8/1/2014	8/1/2015
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	2199	2/20/2014	2/20/2015
Micro-Tronics	Band Reject Filter, 5150-5350 MHz	BRC50703-02	2239	9/16/2014	9/16/2015
Micro-Tronics	Band Reject Filter, 5470-5725 MHz	BRC50704-02	2240	9/16/2014	9/16/2015
Hewlett Packard	SpecAn 9 kHz - 40 GHz, (SA40) Purple	8564E (84125C)	2415	2/27/2014	2/27/2015
Radiated Emissions, 1000 - 12,000 MHz, 19-Dec-14					
EMCO	Antenna, Horn, 1-18 GHz	3115	786	12/20/2013	12/20/2015
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	2199	2/20/2014	2/20/2015
Micro-Tronics	Band Reject Filter, 5725-5875 MHz	BRC50705-02	2241	9/16/2014	9/16/2015
Hewlett Packard	SpecAn 9 kHz - 40 GHz, (SA40) Purple	8564E (84125C)	2415	2/27/2014	2/27/2015
Radiated Emissions, 1 - 40 GHz and Band Edge, 23-Dec-14					
EMCO	Antenna, Horn, 1-18 GHz	3115	786	12/20/2013	12/20/2015
Hewlett Packard	High Pass filter, 8.2 GHz (Red System)	P/N 84300-80039 (84125C)	1152	8/1/2014	8/1/2015
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1630	6/21/2014	6/21/2015
Hewlett Packard	Head (Inc W1-W4, 1946 , 1947) Purple	84125C	1772	4/25/2014	4/25/2015
A. H. Systems	Purple System Horn, 18-40GHz	SAS-574, p/n: 2581	2160	8/11/2014	8/11/2015
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	2199	2/20/2014	2/20/2015
Micro-Tronics	Band Reject Filter, 5150-5350 MHz	BRC50703-02	2239	9/16/2014	9/16/2015
Micro-Tronics	Band Reject Filter, 5470-5725 MHz	BRC50704-02	2240	9/16/2014	9/16/2015
Micro-Tronics	Band Reject Filter, 5725-5875 MHz	BRC50705-02	2241	9/16/2014	9/16/2015
Hewlett Packard	SpecAn 9 kHz - 40 GHz, (SA40) Purple	8564E (84125C)	2415	2/27/2014	2/27/2015
Radiated Emissions, 18 - 40 GHz, 23-Dec-14					
Hewlett Packard	SpecAn 9 kHz - 40 GHz, FT (SA40) Blue	8564E (84125C)	1393	5/6/2014	5/6/2015

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Calibrated</u>	<u>Cal Due</u>
Hewlett Packard	Head (Inc flex cable, (1742,1743) Blue)	84125C	1620	5/6/2014	5/6/2015
A. H. Systems	Spare System Horn, 18-40GHz	SAS-574, p/n: 2581	2162	7/24/2014	7/24/2015
Radiated Emissions, 1,000 - 40,000 MHz, 05-Jan-15					
EMCO	Antenna, Horn, 1-18 GHz	3115	786	12/20/2013	12/20/2015
Micro-Tronics	Band Reject Filter, 5725-5875 MHz	BRC50705-02	1682	7/15/2014	7/15/2015
Hewlett Packard	Head (Inc W1-W4, 1946 , 1947) Purple	84125C	1772	4/25/2014	4/25/2015
A. H. Systems	Purple System Horn, 18-40GHz	SAS-574, p/n: 2581	2160	8/11/2014	8/11/2015
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	2199	2/20/2014	2/20/2015
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	2249	10/3/2014	10/3/2015
Hewlett Packard	SpecAn 9 kHz - 40 GHz, (SA40) Purple	8564E (84125C)	2415	2/27/2014	2/27/2015
T96924					
<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Calibrated</u>	<u>Cal Due</u>
Radio Antenna Port (Power and Spurious Emissions), 11-Dec-14 to 12-Dec-14					
Agilent Technologies	3Hz -44GHz PSA Spectrum Analyzer	E4446A	2796	2/6/2014	2/6/2015
Radio Antenna Port (Power and Spurious Emissions), 26-Dec-14					
Rohde & Schwarz	Signal Analyzer 20 Hz - 26.5 GHz	FSQ26	2327	4/28/2014	4/28/2015
Radio Antenna Port (Power and Spurious Emissions), 29-Dec-14					
Agilent Technologies	PSA, Spectrum Analyzer, (installed options, 111, 115, 123, 1DS, B7J, HYG,	E4446A	2139	4/8/2014	4/8/2015
Radio Antenna Port (Power and Spurious Emissions), 30-Dec-14					
Agilent Technologies	PSA, Spectrum Analyzer, (installed options, 111, 115, 123, 1DS, B7J, HYG,	E4446A	2139	4/8/2014	4/8/2015
Agilent Technologies	3Hz -44GHz PSA Spectrum Analyzer	E4446A	2796	2/6/2014	2/6/2015
Conducted Emissions - AC Power Ports, 06-Jan-15					
EMCO	LISN, 10 kHz-100 MHz	3825/2	1293	2/13/2014	2/13/2015
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	1401	5/15/2014	5/15/2015
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	6/14/2014	6/14/2015

Appendix B Test Data

T96924 Pages 29 – 73
Conducted

T96923 Pages 74 – 117
Radiated

T96924 Pages 118 – 122
AC Conducted



EMC Test Data

Client:	Aruba Networks	Job Number:	J96879
Product:	APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless	T-Log Number:	T96924
	Access Points	Project Manager:	Christine Krebill
Contact:	Tian Mendez	Project Coordinator:	
Emissions Standard(s):	FCC 15.247/FCC 15.407/RSS-210/LP0002	Class:	-
Immunity Standard(s):	-	Environment:	-

EMC Test Data

For The

Aruba Networks

Product

APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points

Date of Last Test: 12/30/2014



EMC Test Data

Client:	Aruba Networks	Job Number:	J96879
Model:	APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number:	T96924
		Project Manager:	Christine Krebill
Contact:	Tian Mendez	Project Coordinator:	-
Standard:	FCC 15.247/FCC 15.407/RSS-210/LP0002	Class:	N/A

Power vs. Data Rate

In normal operating modes the card uses power settings stored on EEPROM to set the output power. For a given nominal output power the actual transmit power normally is reduced as the data rate increases, therefore testing was performed at the data rate in the mode with highest power to determine compliance with the requirements.

The following power measurements were made using a GATED average power meter and with the device configured in a continuous transmit mode on Chain 1 at the various data rates in each mode to verify the highest power mode:

Sample Notes

Sample S/N: L.AYM4A30017 (970AYM0KP00N016)

Driver: 6.37 RC14.54, Version 6.37.14.54e (r425351 WLTEST)

Date of Test: 12/10/2014

Test Engineer: Mark Hill

Test Location: Lab#4

Mode	Data Rate	Power (dBm)	Power setting
802.11b	1	20.4	-q 78
	2	20.8	
	5.5	21.1	
	11	20.9	
802.11g	6	17.1	-q 72
	9	17.1	
	12	17.0	
	18	17.1	
	24	16.9	
	36	16.9	
	48	16.9	
	54	16.8	



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Mode	Data Rate	Power (dBm)	Power setting
802.11n 20MHz	6.5	17.1	-q 72
	13	17.0	
	19.5	16.9	
	26	16.9	
	39	16.9	
	52	16.7	
	58.5	16.6	
	65	16.7	
	78	17.1	
<<-11ac mode only			
802.11n/ac 40MHz	13.5	16.5	-q 72
	27	16.4	
	40.5	16.1	
	54	16.1	
	81	15.9	
	108	15.7	
	121.5	15.8	
	135	15.8	
	162	16.3	
	180	16.3	
<<-11ac mode only			
<<-11ac mode only			
802.11ac 80MHz	29.3	16.3	-q 72
	58.5	16.2	
	87.8	16.1	
	117	16.0	
	175.5	15.8	
	234	15.8	
	266.3	15.6	
	292.5	15.6	
	351	15.5	
	390	15.5	

Note : Power setting - the software power setting used during testing, included for reference only.

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Duty Cycle

Date of Test: 12/10/2014
 Test Engineer: Mark Hill
 Test Location: Lab#4

Duty cycle measurements performed on the worse case data rate for power.


Notes: Measurements taken with maximum RBW/VBW settings allowed.

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
11b	5.5Mbps	0.99	Yes	2.316	0	0	432
11g	6Mbps	0.99	Yes	2.063	0.0	0.0	485
n20	MCS8	0.99	Yes	1.942	0.0	0.0	515
n40	MCS0	0.82	Yes	0.938	0.9	1.8	1066
ac80	VHT0	0.59	Yes	0.256	2.3	4.6	3906

* Correction factor when using RMS/Power averaging - $10 \cdot \log(1/x)$

** Correction factor when using linear voltage average - $20 \cdot \log(1/x)$

T = Minimum transmission duration

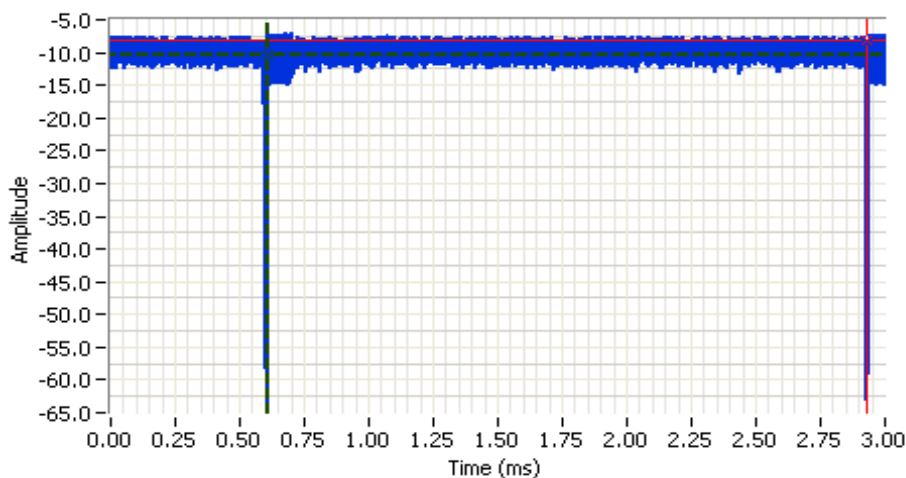


Analyzer Settings
 Agilent Technologies, E4446A
 CF: 2412.000 MHz
 SPAN: 0.000 MHz
 RB: 3.000 MHz
 VB: 3.000 MHz
 Detector: POS
 Attn: 30 DB
 RL Offset: 0.0 DB
 Sweep Time: 3.0ms
 Ref Lvl: 13.0 DBM

Comments
 11b - 5.5Mbps
 T=2.316ms
 Dropout = 0.015

Cursor 1 0.6105 -10.43 Delta Time (ms) 2.316
 Cursor 1 2.9267 -8.24 Delta Amplitude 2.19


Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
Contact: Tian Mendez	Project Manager: Christine Krebill
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Project Coordinator: -
	Class: N/A

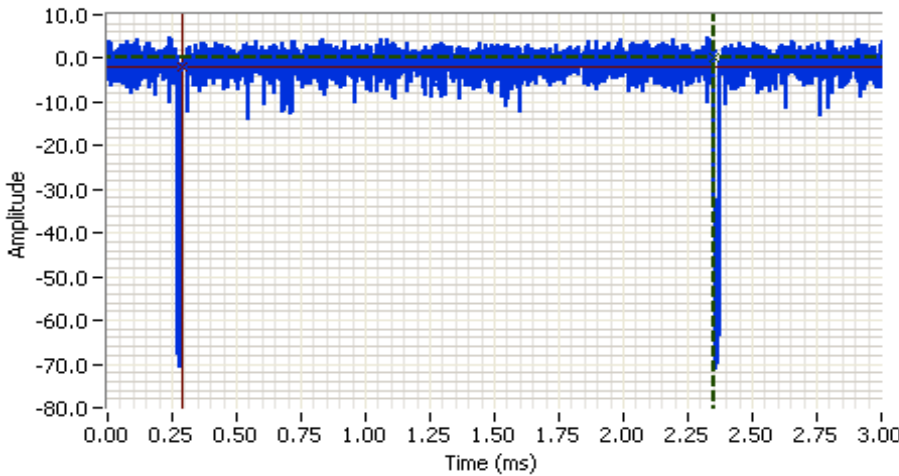

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 5180.000 MHz
 SPAN: 0.000 MHz
 RB: 3.000 MHz
 VB: 3.000 MHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 0.0 DB
 Sweep Time: 5.0ms
 Ref Lvl: 10.0 DBM

Comments
 11a - 6Mbps
 T=2.063ms
 Dropout = 0.020

Cursor 1 2.3538 0.30 Delta Time (ms) 2.063
 Cursor 1 0.2906 -1.89 Delta Amplitude 2.19

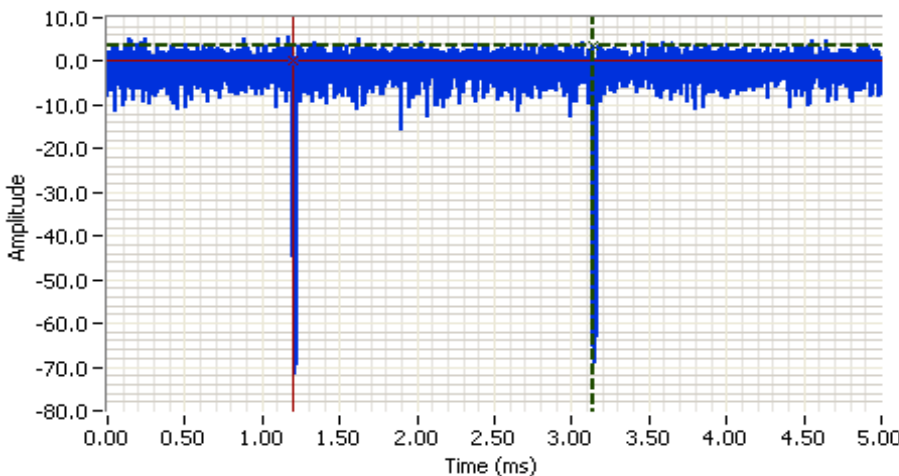


Analyzer Settings
 Agilent Technologies, E4446A
 CF: 5180.000 MHz
 SPAN: 0.000 MHz
 RB: 3.000 MHz
 VB: 3.000 MHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 0.0 DB
 Sweep Time: 5.0ms
 Ref Lvl: 10.0 DBM

Comments
 HT20 - MCS0
 T=1.942ms
 Dropout = 0.020

Cursor 1 3.1400 3.46 Delta Time (ms) 1.942
 Cursor 1 1.1983 0.08 Delta Amplitude 3.38



Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
Contact: Tian Mendez	Project Manager: Christine Krebill
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Project Coordinator: -
	Class: N/A

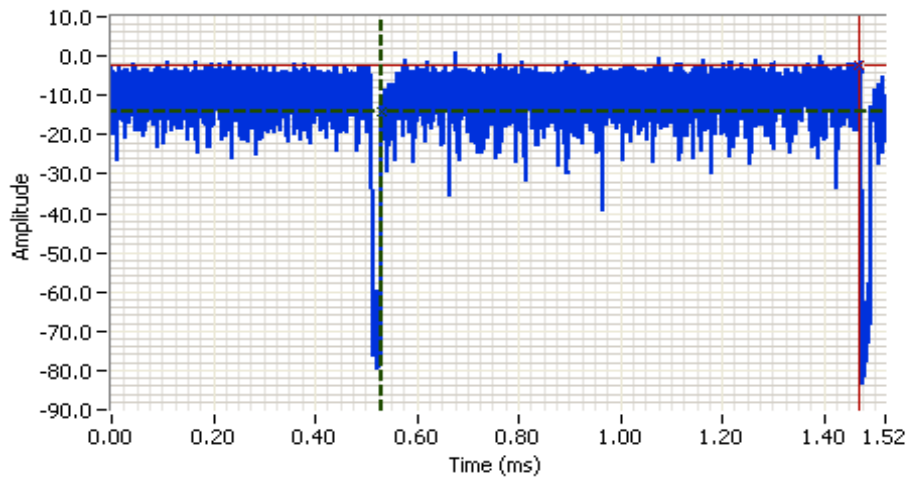

Analyzer Settings


Agilent Technologies, E4446A
 CF: 5190.000 MHz
 SPAN: 0.000 MHz
 RB: 3.000 MHz
 VB: 3.000 MHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 0.0 DB
 Sweep Time: 1.5ms
 Ref Lvl: 10.0 DBM

Comments

HT40 - MCS0
 T=0.938ms
 Dropout = 0.021

Cursor 1 0.5298 -14.01  Delta Time (ms) 0.938

Cursor 1 1.4682 -2.55  Delta Amplitude 11.46

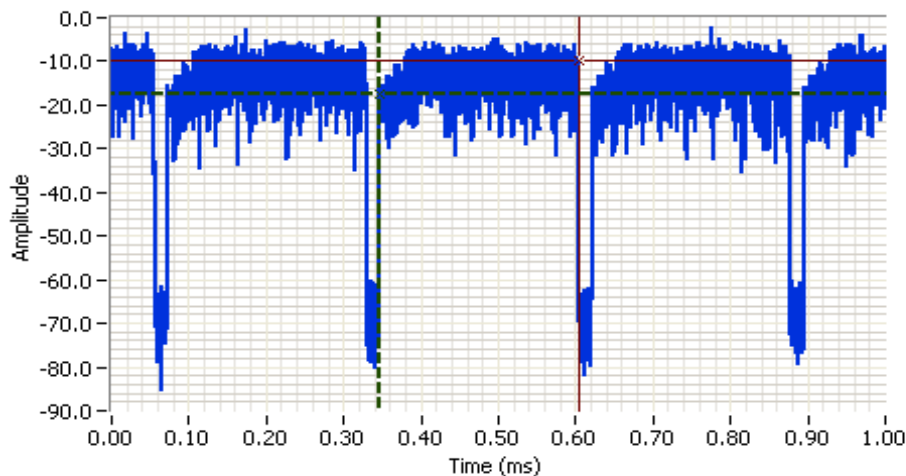

Analyzer Settings

Agilent Technologies, E4446A
 CF: 5210.000 MHz
 SPAN: 0.000 MHz
 RB: 3.000 MHz
 VB: 3.000 MHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 0.0 DB
 Sweep Time: 1.0ms
 Ref Lvl: 10.0 DBM

Comments

AC80 - VHT0
 T=0.256ms
 Dropout = 0.018

Cursor 1 0.3475 -17.69  Delta Time (ms) 0.256

Cursor 1 0.6033 -9.73  Delta Amplitude 7.96





EMC Test Data

Client:	Aruba Networks	Job Number:	J96879
Model:	APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number:	T96924
Contact:	Tian Mendez	Project Manager:	Christine Krebill
Standard:	FCC 15.247/FCC 15.407/RSS-210/LP0002	Project Coordinator:	-
		Class:	N/A

RSS-210 (LELAN) and FCC 15.407(UNII) Antenna Port Measurements Power, PSD, Peak Excursion, Bandwidth and Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Summary of Results

Run #	Test Performed	Limit	Pass / Fail	Result / Margin
Applicable to FCC/IC				
1	Power, 5250 - 5350MHz	15.407(a)(2)	Pass	a: 104.5 mW n20: 116 mW n40: 104.5 mW ac80:75.3mw
1	PSD, 5250 - 5350MHz	15.407(a)(2)	Pass	a: 7.7 dBm/MHz n20: 7.98 dBm/MHz n40: 4.4 dBm/MHz ac80:0.1dBm/MHz
1	Max EIRP 5250 - 5350MHz	TPC required if EIRP \geq 500mW (27dBm). EIRP \geq 200mW (23dBm) DFS threshold = -64dBm.	-	EIRP = 26.64 dBm (461.88 mW)
1	Power, 5470 - 5725MHz	15.407(a)(2)	Pass	a: 106.8 mW n20: 114.5 mW n40: 131.8 mW ac80:200.5mw
1	PSD, 5470 - 5725MHz	15.407(a)(2)	Pass	a: 7.95 dBm/MHz n20: 7.8 dBm/MHz n40: 5.6 dBm/MHz ac80:4.1dBm/MHz
1	Max EIRP 5470 - 5725MHz	TPC required if EIRP \geq 500mW (27dBm). EIRP \geq 200mW (23dBm) DFS threshold	-	EIRP = 29.02 dBm (798.26 mW)



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Run #	Test Performed	Limit	Pass / Fail	Result / Margin
1	99% Bandwidth	RSS 210 (Information only)	N/A	a: 17 MHz n20: 18 MHz n40: 36.3 MHz ac80: 76.4MHz

General Test Configuration

When measuring the conducted emissions from the EUT's antenna port, the antenna port of the EUT was connected to the spectrum analyzer or power meter via a suitable attenuator to prevent overloading the measurement system. All measurements are corrected to allow for the external attenuators and cables used.

Ambient Conditions:

Temperature: 18-21 °C
Rel. Humidity: 30-45 %

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Procedure Comments:

Measurements performed in accordance with FCC KDB 789033

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
11a	6Mbps	0.99	Yes	2.063	0.0	0.0	485
n20	MCS8	0.99	Yes	1.942	0.0	0.0	515
n40	MCS0	0.82	Yes	0.938	0.9	1.8	1066
ac80	VHT0	0.59	Yes	0.256	2.3	4.6	3906

Sample Notes (For UNII 1 & 2)

Sample S/N: LAYM4A30030

Driver: 6.37 RC14.54

Tab6- Ant 1 (txchain 1)

Tab5- Ant 2 (txchain 2)

Pkteng tx 20 1500 0

Sample Notes (For UNII3)

Sample S/N: L.AYM4A30017

Driver: 6.37 RC14.54

Tab6- Ant 1 (txchain 1)

Tab5- Ant 2 (txchain 2)

Pkteng tx 20 1500 0



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Run #1: Bandwidth, Output Power and Power Spectral Density - MIMO Systems

Note 1:	For modes with duty cycle >98%: output power measured using a spectrum analyzer (see plots below). RBW=1MHz, VB=3 MHz, # of points in sweep $\geq 2 \cdot \text{span} / \text{RBW}$, RMS detector, power averaging on (transmitted signal was continuous) and power integration over 30, 60, 100 MHz (method SA-1 of KDB 789033). For modes with duty cycle <98% and constant: output power measured as above with the Power Cor Factor applied (method SA-2)
Note 2:	Measured using the same analyzer settings used for output power.
Note 3:	For RSS-210 the limit for the 5150 - 5250 MHz band accounts for the antenna gain as the maximum eirp allowed is 10dBm/MHz. The limits are also corrected for instances where the highest measured value of the PSD exceeds the average PSD (calculated from the measured power divided by the measured 99% bandwidth) by more than 3dB by the amount that the measured value exceeds the average by more than 3dB.
Note 4:	99% Bandwidth measured in accordance with RSS GEN - RB > 1% of span and VB $\geq 3 \cdot \text{RB}$
Note 5:	For MIMO systems the total output power and total PSD are calculated from the sum of the powers of the individual chains (in linear terms). The antenna gain used to determine the EIRP and limits for PSD/Output power depends on the operating mode of the MIMO device. If the signals on the non-coherent between the transmit chains then the gain used to determine the limits is the highest gain of the individual chains and the EIRP is the sum of the products of gain and power on each chain. If the signals are coherent then the effective antenna gain is the sum (in linear terms) of the gains for each chain and the EIRP is the product of the effective gain and total power.

Antenna Gain Information

Legacy Modes (11a)

Freq	Antenna Gain (dBi) / Chain				BF	MultiChain Legacy	CDD	Sectorized / Xpol	Dir G (PWR)	Dir G (PSD)
	1	2	3	4						
5150-5250	6.0	6.0			No	Yes	Yes	No	6.0	9.0
5250-5350	6.0	6.0			No	Yes	Yes	No	6.0	9.0
5470-5725	6.0	6.0			No	Yes	Yes	No	6.0	9.0
5725-5825	6.0	6.0			No	Yes	Yes	No	6.0	9.0



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

11n/ac modes (n20/n40/ac80)

Freq	Antenna Gain (dBi) / Chain				BF	MultiChain Legacy	CDD	Sectorized / Xpol	Dir G (PWR)	Dir G (PSD)
	1	2	3	4						
5150-5250	6.0	6.0			No	N/A	Yes	No	6.0	9.0
5250-5350	6.0	6.0			No	N/A	Yes	No	6.0	9.0
5470-5725	6.0	6.0			No	N/A	Yes	No	6.0	9.0
5725-5825	6.0	6.0			No	N/A	Yes	No	6.0	9.0

For devices that support CDD modes

Min # of spatial streams: 1
 Max # of spatial streams: 2

Notes:	BF = beamforming mode supported, Multichain Legacy = 802.11 legacy data rates supported for multichain transmissions, CDD = Cyclic Delay Diversity (or Cyclic Shift Diversity) modes supported, Sectorized / Xpol = antennas are sectorized or cross polarized.
Notes:	Dir G (PWR) = total gain (Gant + Array Gain) for power calculations; GA (PSD) = total gain for PSD calculations based on FCC KDB 662911. Depending on the modes supported, the Array Gain value for power could be different from the PSD value.
Notes:	Array gain for power/psd calculated per KDB 662911. Spatial Multiplexing with Nant=4, Nss=2, for worse case condition. Array gain = $10 \cdot \log(4/2) = 3\text{dB}$.
Notes:	For systems with Beamforming and CDD, choose one the following options: Option 1: Delays are optimized for beamforming, rather than being selected from cyclic delay table of 802.11; Array gains calculated based on beamforming criteria. Option 2: Antennas are paired for beamforming, and the pairs are configured to use the cyclic delay diversity of 802.11; the array gain associated with beamforming with 2 antennas (3dB), and the array gain associated with CDD with two antennas (3dB for PSD and 0 dB for power)



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

MIMO Device - 5250-5350 MHz Band - FCC
 Date of Test: 12/29/14, 12/30/14
 Test Engineer: Jack Liu
 Test Location: FT Lab #4A
 Mode: 11a
 Config. Used: 1
 Config Change: None
 EUT Voltage: 120 VAC/ 60 Hz
 Max EIRP (mW): 415.87961

Frequency (MHz)	Chain	Software Setting	26dB BW (MHz)	Duty Cycle %	Power dBm	Total Power ¹ mW	dBm	FCC Limit dBm	Max Power (W)	Result
5260	1	q71	20.7	99	16.9	103.5	20.1	24.0	0.104	Pass
	2				17.4					
5300	1	q70	20.1	99	17.0	104.5	20.2	24.0		
	2				17.4					
5320	1	q69	20.2	99	17.1	104.0	20.2	24.0		
	2				17.3					

MIMO Device - 5250-5350 MHz Band - Industry Canada
 Mode: 11a
 Max EIRP (mW): 415.9

Frequency (MHz)	Chain	Software Setting	99% BW (MHz)	Duty Cycle %	Power ¹ dBm	Total Power dBm	dBm (eirp)	IC limit dBm	Max Power (W)	Result
5260	1	q71	16.9	99	16.9	20.1	26.1	23.3	0.104	Pass
	2				17.4					
5300	1	q70	16.9	99	17.0	20.2	26.2	23.3		
	2				17.4					
5320	1	q69	16.9	99	17.1	20.2	26.2	23.3		
	2				17.3					




EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

5250-5350 PSD - FCC/IC Mode: 11a


Frequency (MHz)	Chain	Software Setting	99% BW (MHz)	Duty Cycle %	PSD dBm/MHz	Total PSD ¹ mW/MHz	Total PSD ¹ dBm/MHz	FCC Limit dBm/MHz	IC Limit dBm/MHz	Result
5260	1	q71	16.9	99	4.3	5.8	7.6	8.0	11.0	Pass
	2				4.9					
5300	1	q70	16.9	99	4.5	5.9	7.7	8.0	11.0	Pass
	2				4.8					
5320	1	q69	16.9	99	4.4	5.8	7.6	8.0	11.0	Pass
	2				4.8					

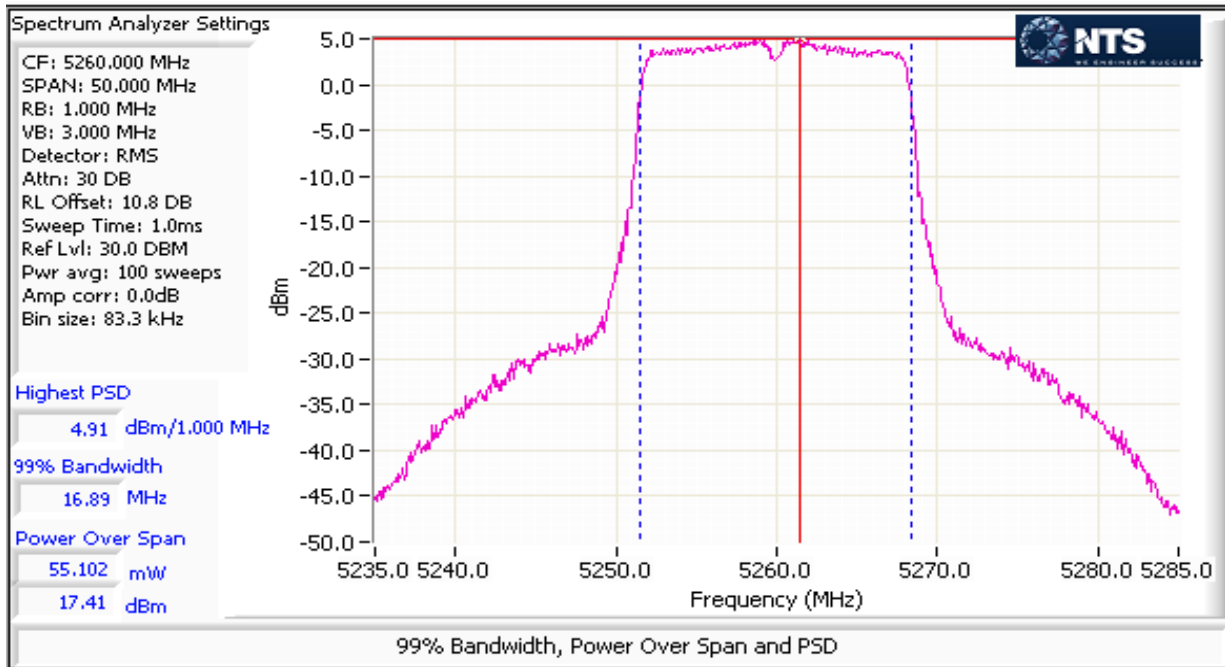



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

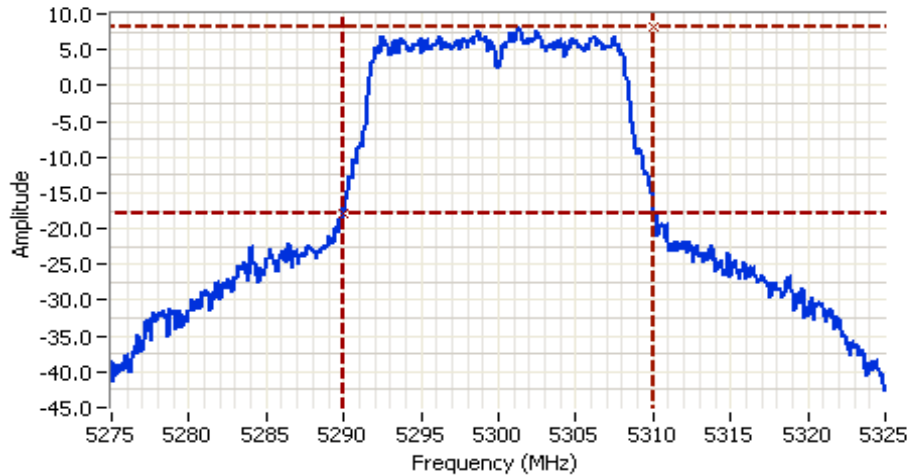

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 5300.000 MHz
 SPAN: 50.000 MHz
 RB: 200 kHz
 VB: 620 kHz
 Detector: POS
 Attn: 30 DB
 RL Offset: 10.8 DB
 Sweep Time: 1.2ms
 Ref Lvl: 30.0 DBM

Comments
 26dB BW: 20.083 MHz
 802.11a 20MHz-Chain1

Cursor 1	5310.0000	8.23	⊕ ⊖ 🔒	Delta Freq.	20.083
Cursor 2	5289.9167	-17.77	⊕ ⊖ 🔒	Delta Amplitude	26.00





EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

MIMO Device - 5250-5350 MHz Band - FCC

Mode: n20

Max EIRP (mW): 461.88211

Frequency (MHz)	Chain	Software Setting	26dB BW (MHz)	Duty Cycle %	Power dBm	Total Power ¹		FCC Limit dBm	Max Power (W)	Result
						mW	dBm			
5260	1	q72	20.7	99	17.3	110.2	20.4	24.0	0.116	Pass
	2				17.6					
5300	1	q72	20.7	99	17.3	116.0	20.6	24.0		Pass
	2				17.9					
5320	1	q71	20.1	99	17.4	114.9	20.6	24.0		Pass
	2				17.8					

MIMO Device - 5250-5350 MHz Band - Industry Canada

Mode: n20

Max EIRP (mW): 461.9

Frequency (MHz)	Chain	Software Setting	99% BW (MHz)	Duty Cycle %	Power ¹ dBm	Total Power		IC limit dBm	Max Power (W)	Result
						dBm	dBm (eirp)			
5260	1	q72	18.1	99	17.3	20.4	26.4	23.6	0.116	Pass
	2				17.6					
5300	1	q72	18.1	99	17.3	20.6	26.6	23.6		Pass
	2				17.9					
5320	1	q71	18.1	99	17.4	20.6	26.6	23.6		Pass
	2				17.8					




EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

5250-5350 PSD - FCC/IC Mode: n20


Frequency (MHz)	Chain	Software Setting	99% BW (MHz)	Duty Cycle %	PSD dBm/MHz	Total PSD ¹ mW/MHz	Total PSD ¹ dBm/MHz	FCC Limit dBm/MHz	IC Limit dBm/MHz	Result
5260	1	q72	18.1	99	4.6	5.9	7.7	8.0	11.0	Pass
	2				4.7					
5300	1	q72	18.1	99	4.6	6.1	7.8	8.0	11.0	Pass
	2				5.1					
5320	1	q71	18.1	99	4.7	6.3	7.98	8.0	11.0	Pass
	2				5.2					

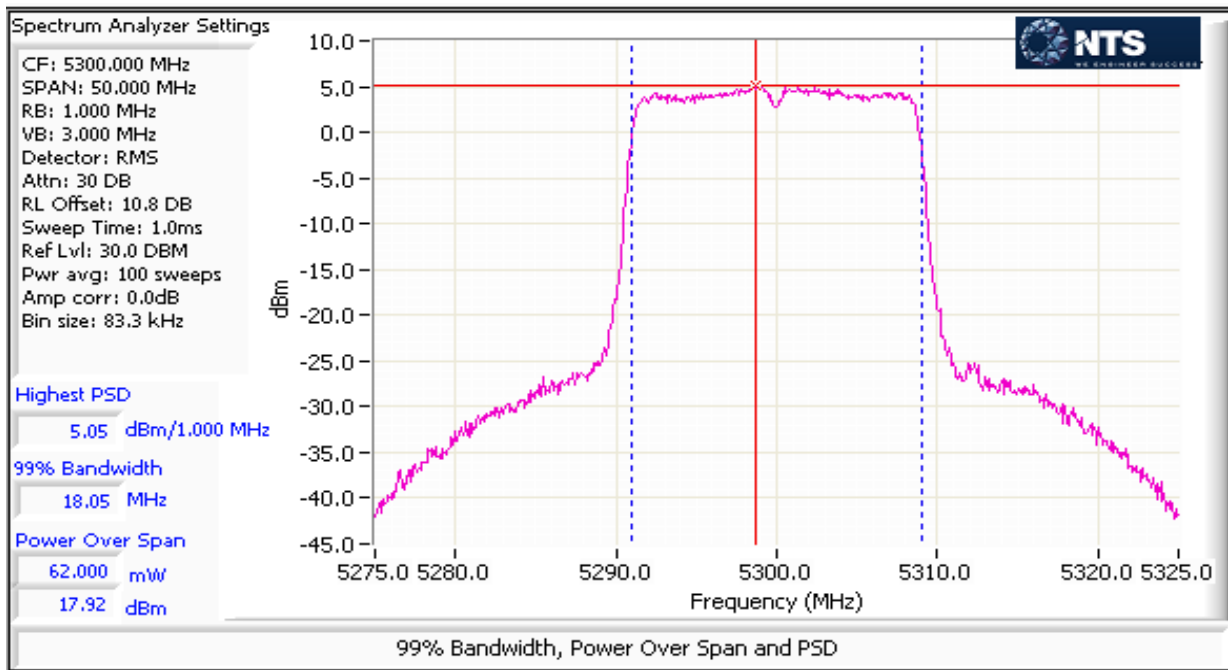



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

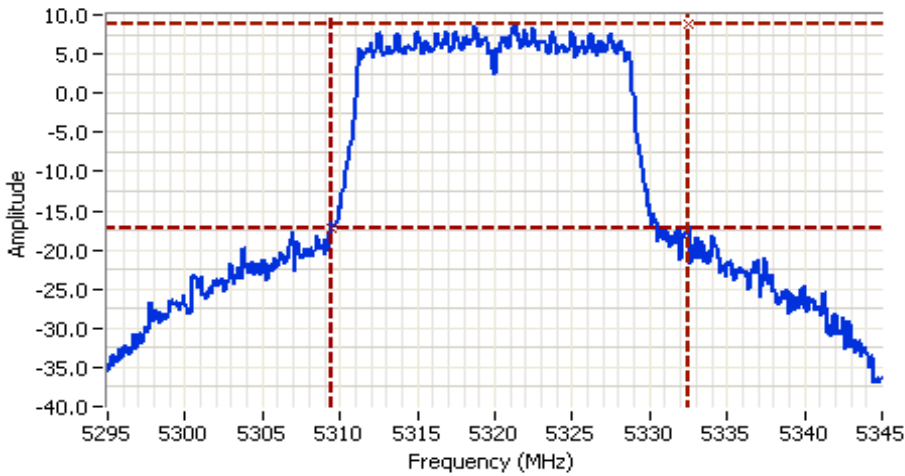

Analyzer Settings
Agilent Technologies, E4446A
CF: 5320.000 MHz
SPAN: 50.000 MHz
RB: 200 kHz
VB: 620 kHz
Detector: POS
Attn: 30 DB
RL Offset: 11.5 DB
Sweep Time: 1.2ms
Ref Lvl: 30.0 DBM

Comments
26dB BW: 23.083 MHz
802.11n 20MHz-Chain 2

Cursor 1	5332.5000	8.81	⊕ ⊖ ⊞ ⊚
Cursor 2	5309.4167	-17.19	⊕ ⊖ ⊞ ⊚

Delta Freq. 23.083
Delta Amplitude 26.00





EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

MIMO Device - 5250-5350 MHz Band - FCC

Mode: n40

Max EIRP (mW): 416.15152

Frequency (MHz)	Chain	Software Setting	26dB BW (MHz)	Duty Cycle %	Power dBm	Total Power ¹ mW	dBm	FCC Limit dBm	Max Power (W)	Result
5270	1	q72	39.5	82	16.6	104.5	20.2	24.0	0.105	Pass
	2				16.0					
5310	1	q67	39.5	82	15.9	91.3	19.6	24.0		
	2				15.6					

MIMO Device - 5250-5350 MHz Band - Industry Canada

Mode: n40

Max EIRP (mW): 416.2



Frequency (MHz)	Chain	Software Setting	99% BW (MHz)	Duty Cycle %	Power ¹ dBm	Total Power dBm	dBm (eirp)	IC limit dBm	Max Power (W)	Result
5270	1	q72	36.47	82	16.6	20.2	26.192515	24.0	0.105	Pass
	2				16.0					
5310	1	q67	36.47	82	15.9	19.6	25.605891	24.0		
	2				15.6					

MIMO Device 5250-5350 PSD - FCC/IC

Mode: n40

Frequency (MHz)	Chain	Software Setting	99% BW (MHz)	Duty Cycle %	PSD dBm/MHz	Total PSD ¹ mW/MHz	dBm/MHz	FCC Limit dBm/MHz	IC Limit dBm/MHz	Result
5270	1	q72	36.47	82	0.7	2.8	4.4	8.0	11.0	Pass
	2				0.4					
5310	1	q67	36.47	82	0.5	2.5	4.0	8.0	11.0	
	2				-0.1					

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

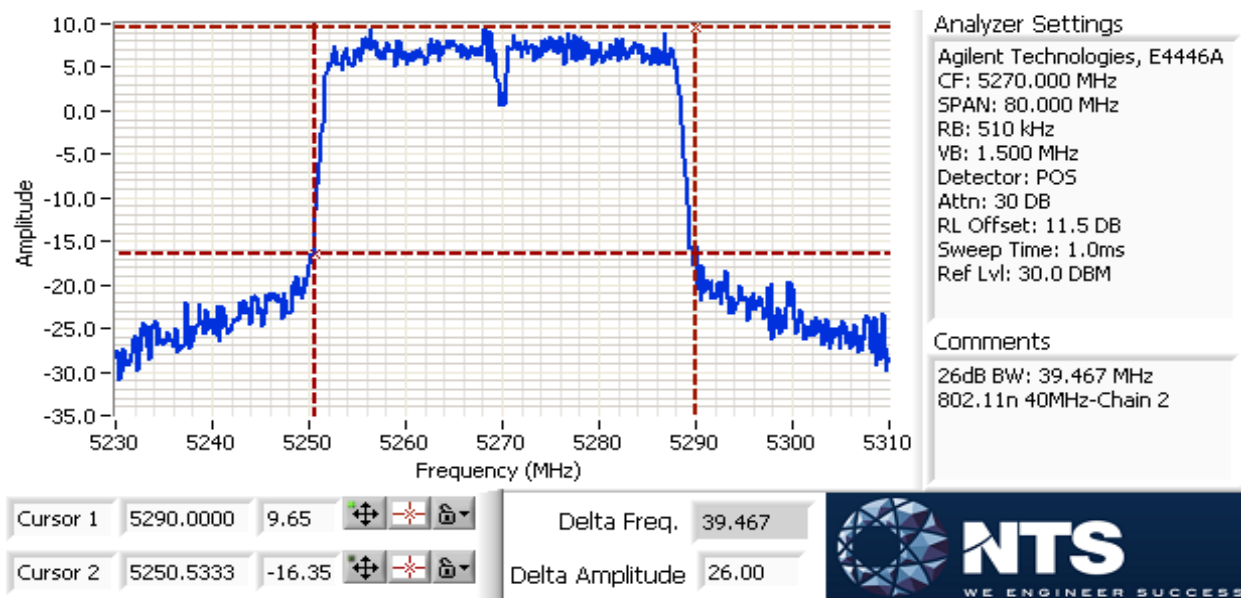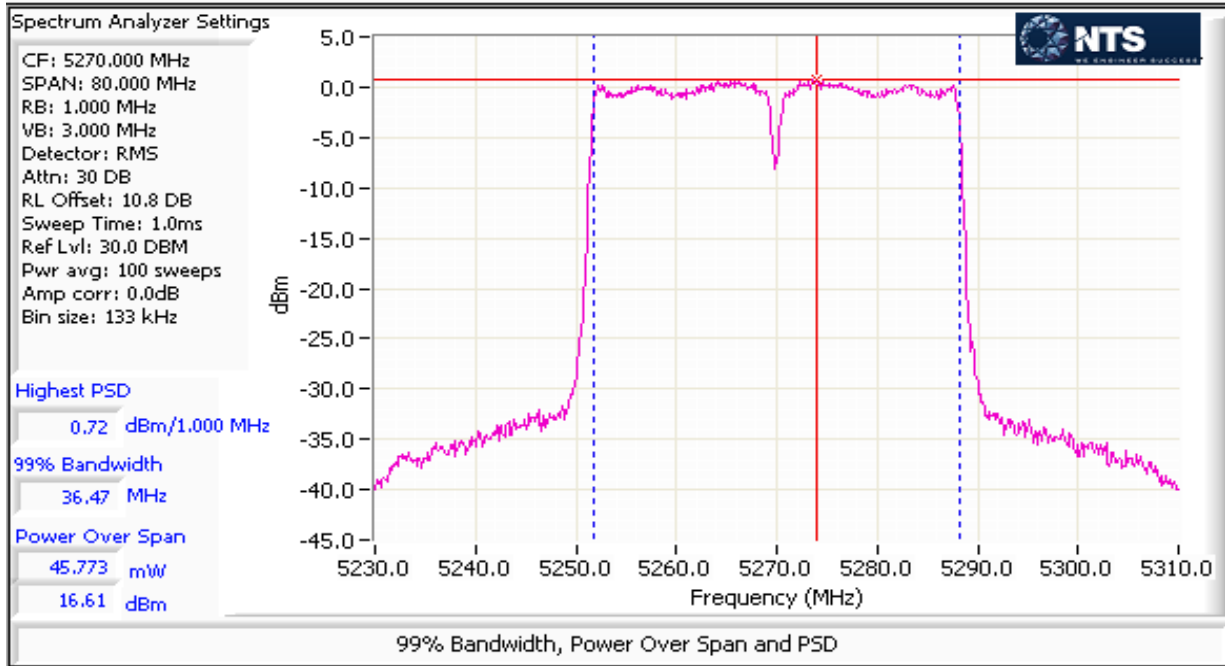



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

MIMO Device - 5250-5350 MHz Band - FCC

Mode: ac80

Max EIRP (mW): 299.72752

Frequency (MHz)	Chain	Software Setting	26dB BW (MHz)	Duty Cycle %	Power dBm	Total Power ¹ mW	dBm	FCC Limit dBm	Max Power (W)	Result
5290	1	q58	82.1	59	13.4	75.3	18.8	24.0	0.075	Pass
	2				13.5					

MIMO Device - 5250-5350 MHz Band - Industry Canada

Mode: ac80

Max EIRP (mW): 299.7



Frequency (MHz)	Chain	Software Setting	99% BW (MHz)	Duty Cycle %	Power ¹ dBm	Total Power dBm	dBm (eirp)	IC limit dBm	Max Power (W)	Result
5290	1	q58	75.71	59	13.4	18.8	24.8	24.0	0.075	Pass
	2				13.5					

MIMO Device 5250-5350 PSD - FCC/IC

Mode: ac80

Frequency (MHz)	Chain	Software Setting	99% BW (MHz)	Duty Cycle %	PSD dBm/MHz	Total PSD ¹ mW/MHz	dBm/MHz	FCC Limit dBm/MHz	IC Limit dBm/MHz	Result
5290	1	q58	75.71	59	-5.2	1.0	0.1	8.0	11.0	Pass
	2				-5.2					

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

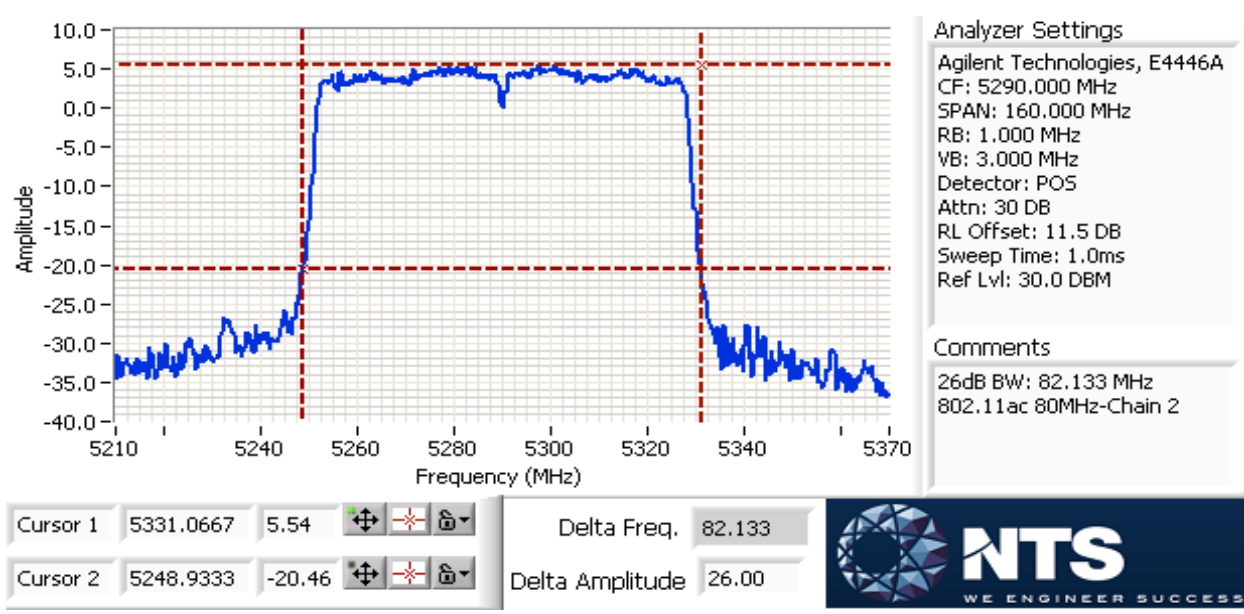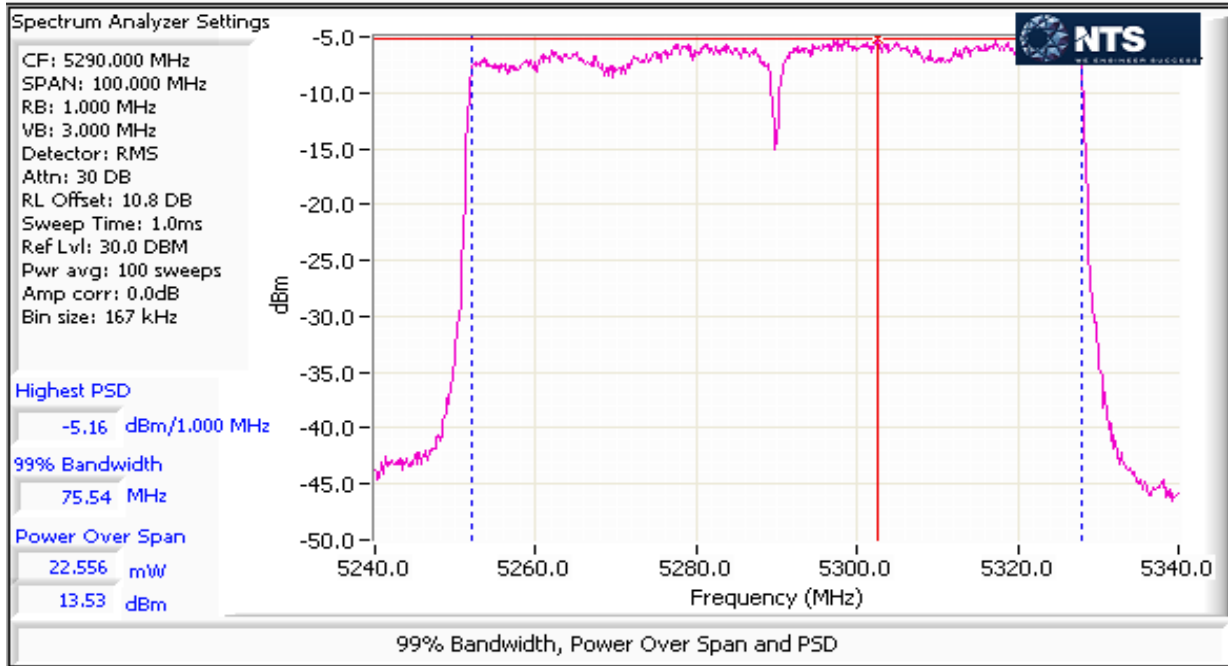



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

MIMO Device - 5470-5725 MHz Band - FCC

Date of Test: 12/30/2014

Test Engineer: Jack Liu

Test Location: FT Lab #4A

Mode: 11a

Config. Used: 1

Config Change: None

EUT Voltage: 120 VAC/ 60 Hz

Max EIRP (mW): 425.21073

Frequency (MHz)	Chain	Software Setting	26dB BW (MHz)	Duty Cycle %	Power dBm	Total Power ¹ mW	dBm	FCC Limit dBm	Max Power (W)	Result						
5500	1	q68	20.1	99	16.9	106.8	20.3	24.0			0.107	Pass				
	2				17.6											
5580	1	q67	20.1	99	16.7	101.9	20.1	24.0	0.107	Pass						
	2				17.4											
5700	1	q69	20.2	99	16.8	102.0	20.1	24.0					0.107	Pass		
	2				17.4											
802.11ac 20MHz UNII-2ext																
5720	1	q67	15.08	99	16.2	84.9	19.3	22.8							0.107	Pass
	2				16.4											
UNII-3																
5720	1	q67	5.1	99	9.9	19.4	12.9	18.1			0.107	Pass				
	2				9.8											



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

MIMO Device - 5470-5725 MHz Band - Industry Canada

Mode: 11a

Max EIRP (mW): 425.2

Frequency (MHz)	Chain	Software Setting	99% BW (MHz)	Duty Cycle %	Power ¹ dBm	Total Power dBm	dBm (eirp)	IC limit dBm	Max Power (W)	Result			
5500	1	q68	16.89	99	16.9	20.3	26.3	23.3	0.107	Pass			
	2				17.6								
5580	1	q67	16.89	99	16.7	20.1	26.1	23.3		0.107	Pass		
	2				17.4								
5700	1	q69	16.89	99	16.8	20.1	26.1	23.3			0.107	Pass	
	2				17.4								
802.11ac 20MHz UNII-2ext													
5720	1	q67	13.48	99	16.2	19.3	25.3	22.3				0.107	Pass
	2				16.4								
UNII-3													
5720	1	q67	3.89	99	9.9	12.9	18.9	16.9	0.107				Pass
	2				9.8								



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

5470-5700 PSD - FCC/IC
Mode: 11a

Frequency (MHz)	Chain	Software Setting	99% BW (MHz)	Duty Cycle %	PSD dBm/MHz	Total PSD ¹		FCC Limit dBm/MHz	IC Limit dBm/MHz	Result
						mW/MHz	dBm/MHz			
5500	1	q68	16.89	99	4.3	6.2	7.95	8.0	11.0	Pass
	2				5.5					
5580	1	q67	16.89	99	4.3	5.9	7.7	8.0	11.0	Pass
	2				5.2					
5700	1	q69	16.89	99	4.1	6.0	7.8	8.0	11.0	Pass
	2				5.3					



802.11ac 20MHz
UNII-2ext

5720	1	q67	13.48	99	4.6	6.2	7.94	8.0	11.0	Pass
	2				5.2					



UNII-3

5720	1	q67	3.89	99	4.0	5.1	7.0	8.0	11.0	Pass
	2				4.1					


Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

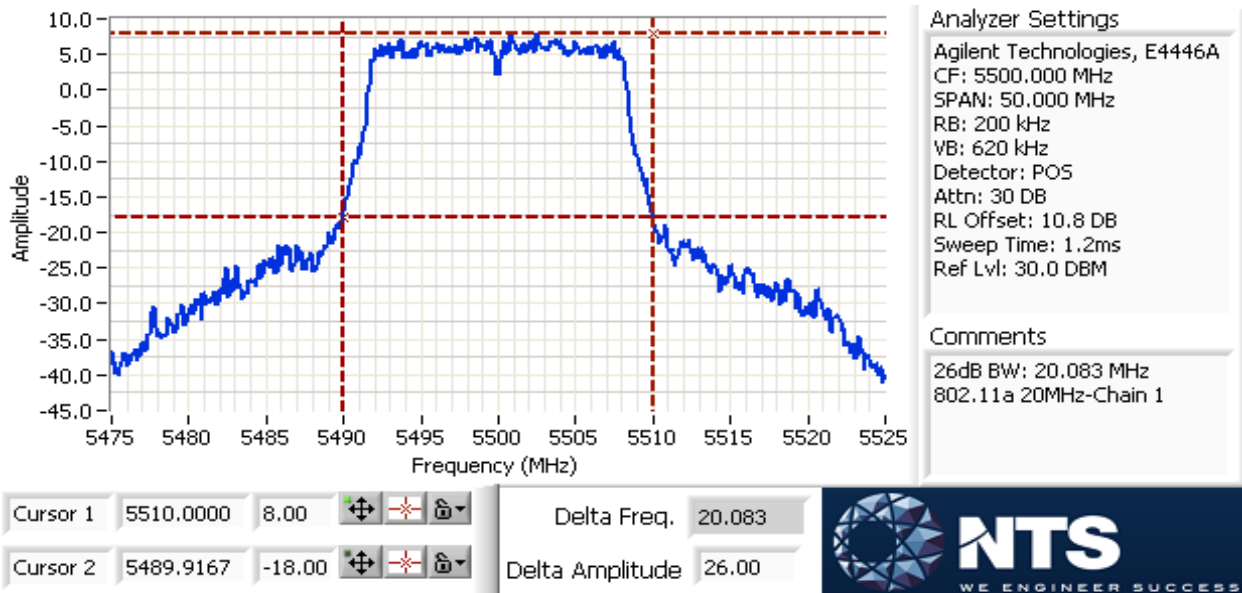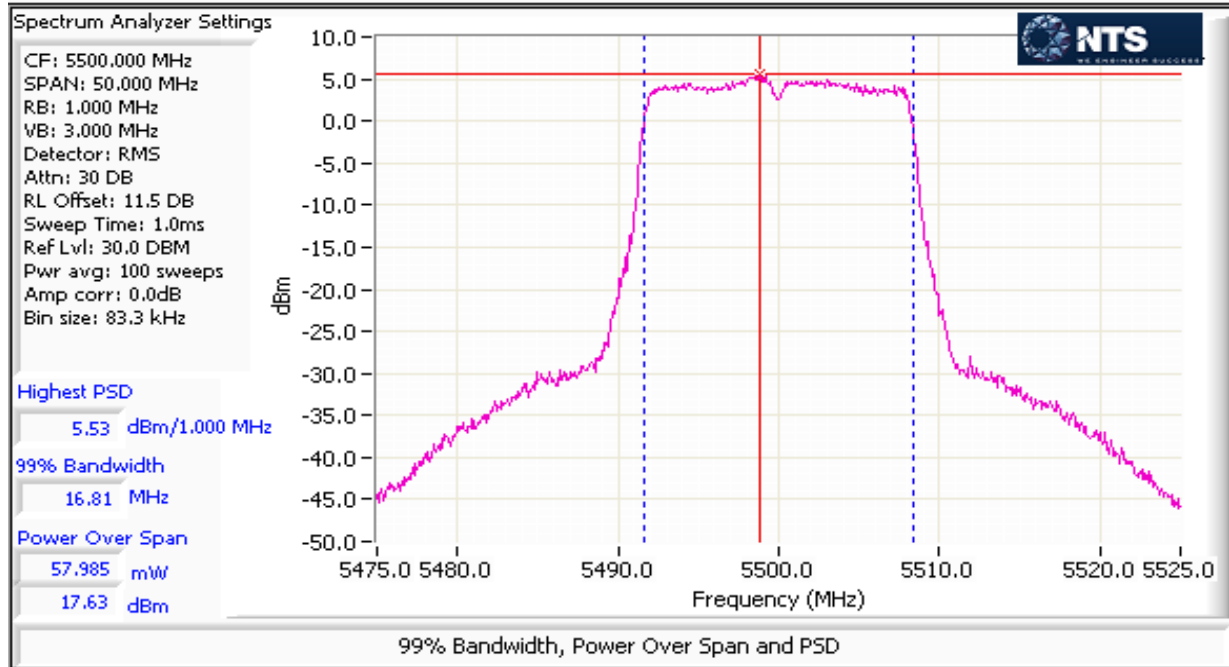

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

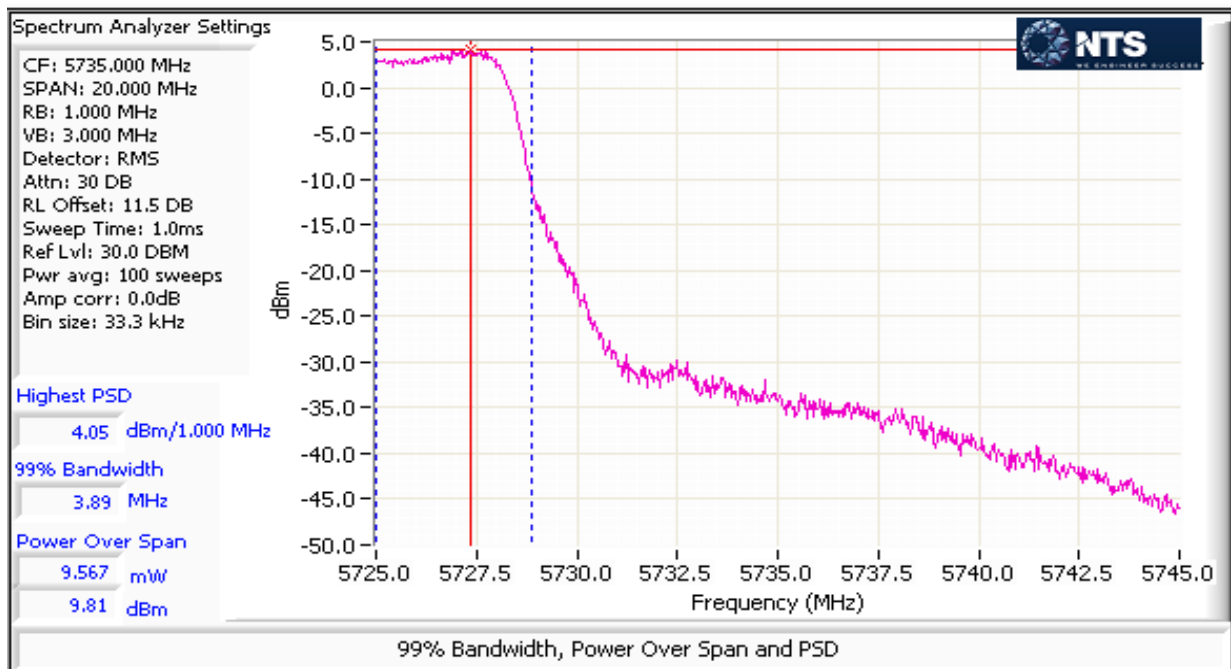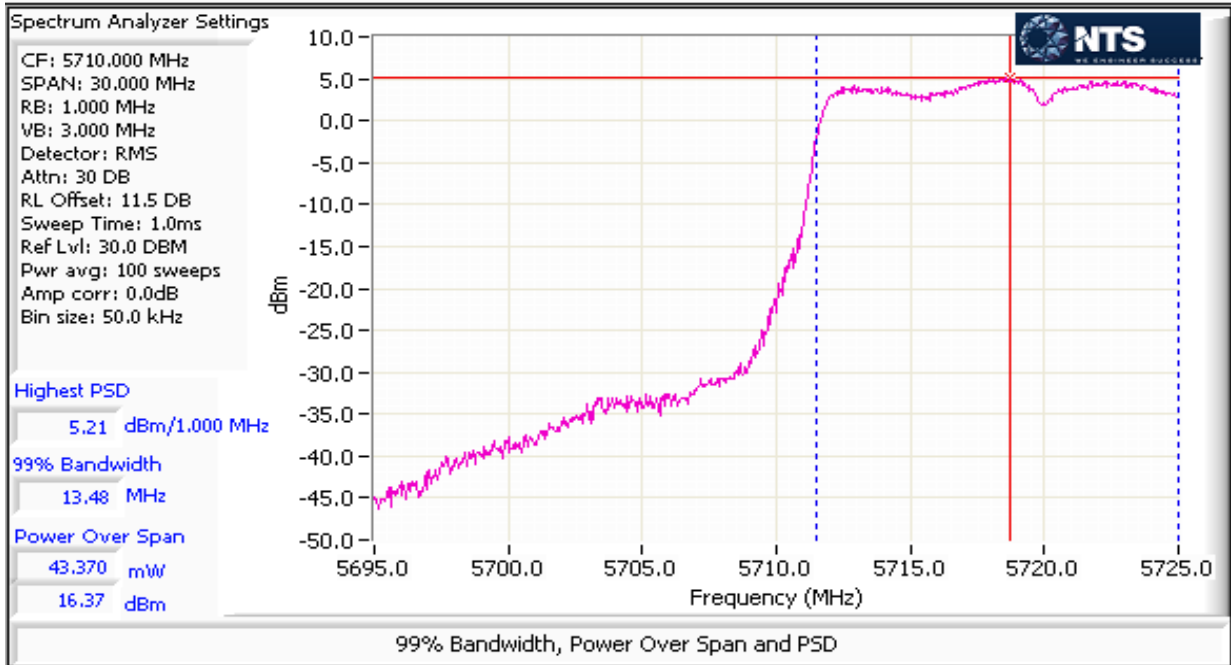

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

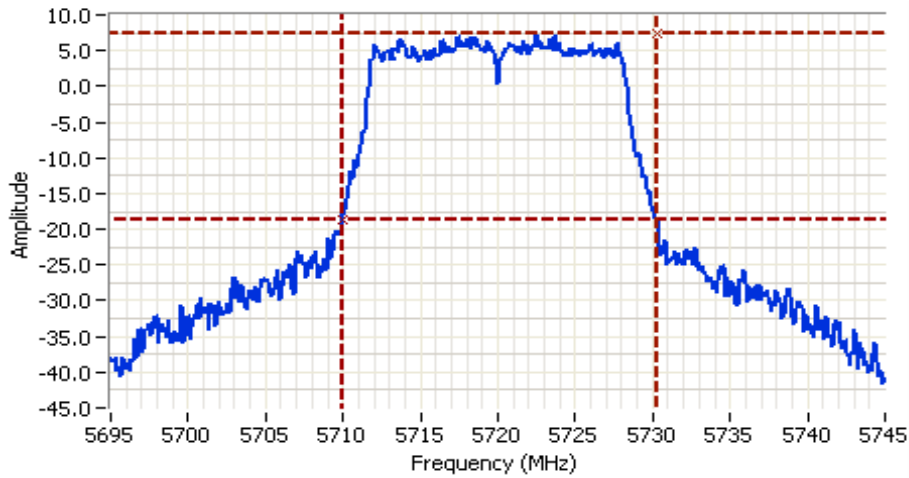

Analyzer Settings

Agilent Technologies, E4446A
 CF: 5720.000 MHz
 SPAN: 50.000 MHz
 RB: 200 kHz
 VB: 620 kHz
 Detector: POS
 Attn: 30 DB
 RL Offset: 10.8 DB
 Sweep Time: 1.2ms
 Ref Lvl: 30.0 DBM

Comments

26dB BW: 20.417 MHz
 802.11a 20MHz-Chain 1
 UNII2Ext:15.083MHz
 UNII3:5.33MHz

Cursor 1	5730.3333	7.36	
Cursor 2	5709.9167	-18.64	

Delta Freq.	20.417
Delta Amplitude	26.00



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

MIMO Device - 5470-5725 MHz Band - FCC

Mode: n20

Max EIRP (mW): 455.93391

Frequency (MHz)	Chain	Software Setting	26dB BW (MHz)	Duty Cycle %	Power dBm	Total Power ¹ mW	dBm	FCC Limit dBm	Max Power (W)	Result			
5500	1	q69	20.33	99	17.1	114.5	20.6	24.0	0.115	Pass			
	2				18.1								
5580	1	q69	20.5	99	17.2	113.5	20.5	24.0		0.115	Pass		
	2				17.9								
5700	1	q68	20.5	99	17.1	108.8	20.4	24.0			0.115	Pass	
	2				17.6								
802.11ac 20MHz UNII-2ext													
5720	1	q68	15.167	99	16.1	84.9	19.3	22.8				0.115	Pass
	2				16.4								
UNII-3													
5720	1	q68	5.167	99	10.4	22.7	13.6	18.1	0.115				Pass
	2				10.7								



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

MIMO Device - 5470-5725 MHz Band - Industry Canada

Mode: n20

Max EIRP (mW): 455.9

Frequency (MHz)	Chain	Software Setting	99% BW (MHz)	Duty Cycle %	Power ¹ dBm	Total Power dBm	dBm (eirp)	IC limit dBm	Max Power (W)	Result			
5500	1	q69	18.05	99	17.1	20.6	26.6	23.6	0.115	Pass			
	2				18.1								
5580	1	q69	17.97	99	17.2	20.5	26.5	23.5		0.115	Pass		
	2				17.9								
5700	1	q68	18.05	99	17.1	20.4	26.4	23.6			0.115	Pass	
	2				17.6								
802.11ac 20MHz UNII-2ext													
5720	1	q68	14.03	99	16.1	19.3	25.3	22.5				0.115	Pass
	2				16.4								
UNII-3													
5720	1	q68	4.33	99	10.4	13.6	19.6	17.4	0.115				Pass
	2				10.7								



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

5470-5725 PSD - FCC/IC
Mode: n20

Frequency (MHz)	Chain	Software Setting	99% BW (MHz)	Duty Cycle %	PSD dBm/MHz	Total PSD ¹ mW/MHz	Total PSD ¹ dBm/MHz	FCC Limit dBm/MHz	IC Limit dBm/MHz	Result
5500	1	q69	18.05	99	4.2	6.0	7.8	8.0	11.0	Pass
	2				5.3					
5580	1	q69	17.97	99	4.4	6.1	7.8	8.0	11.0	Pass
	2				5.2					
5700	1	q68	18.05	99	4.4	5.8	7.7	8.0	11.0	Pass
	2				4.8					

802.11ac 20MHz



UNII-2ext

5720	1	q68	14.03	99	4.4	5.9	7.7	8.0	11.0	Pass
	2				5.0					



UNII-3

5720	1	q68	4.33	99	3.8	4.9	6.9	8.0	11.0	Pass
	2				4.1					


Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

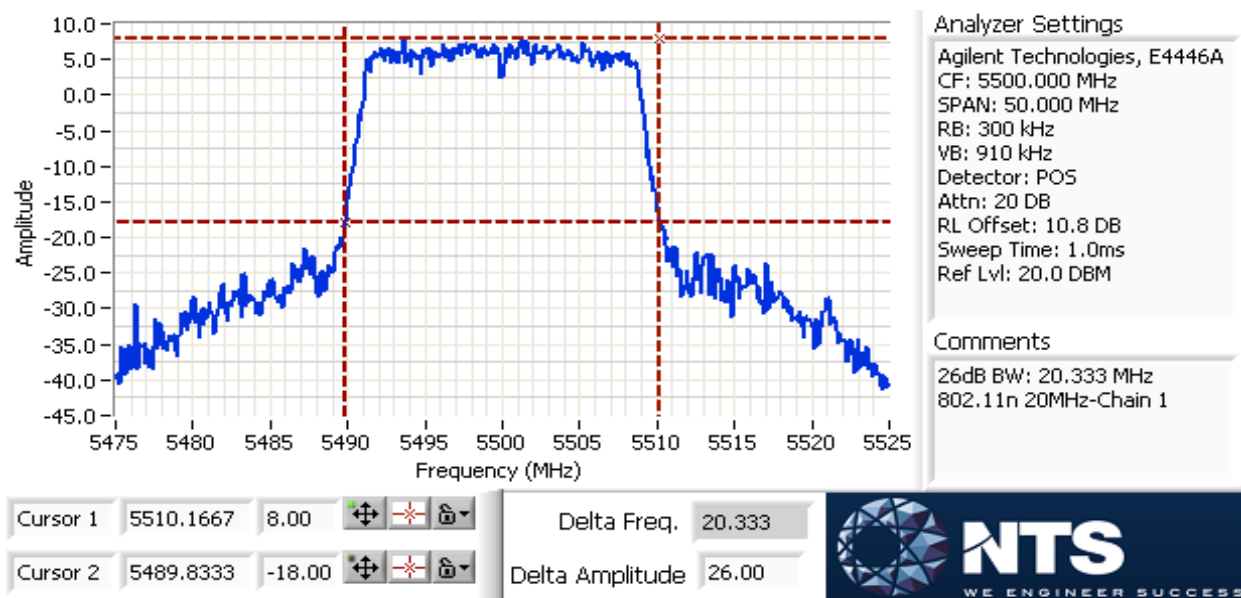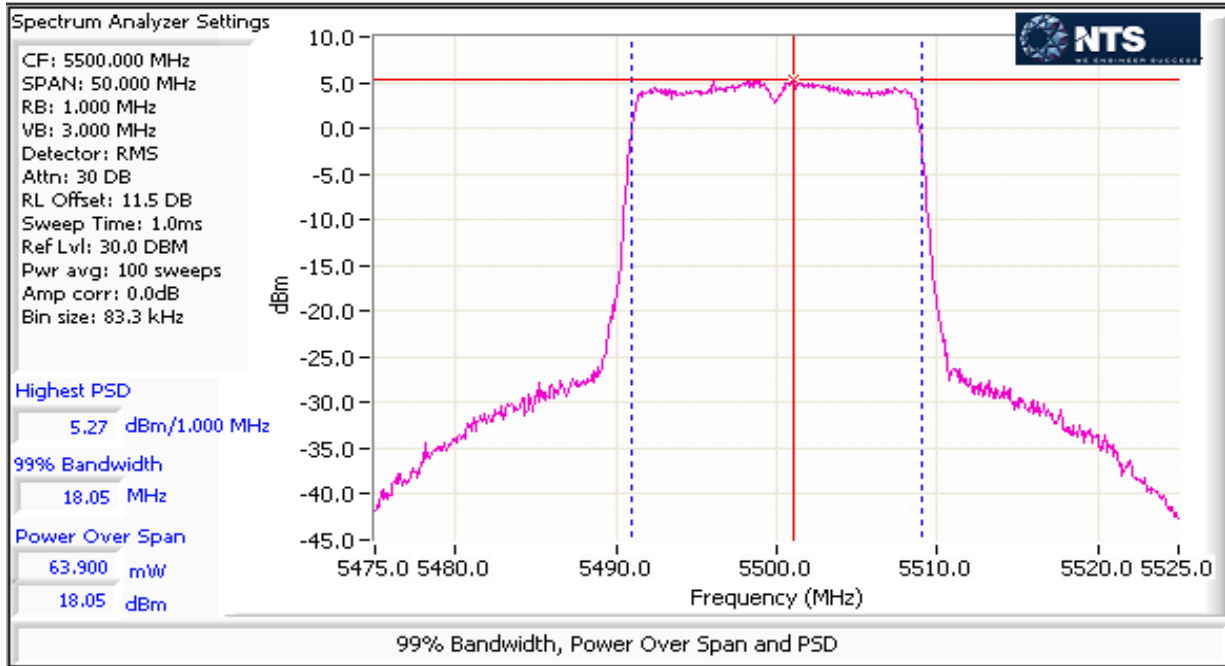

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

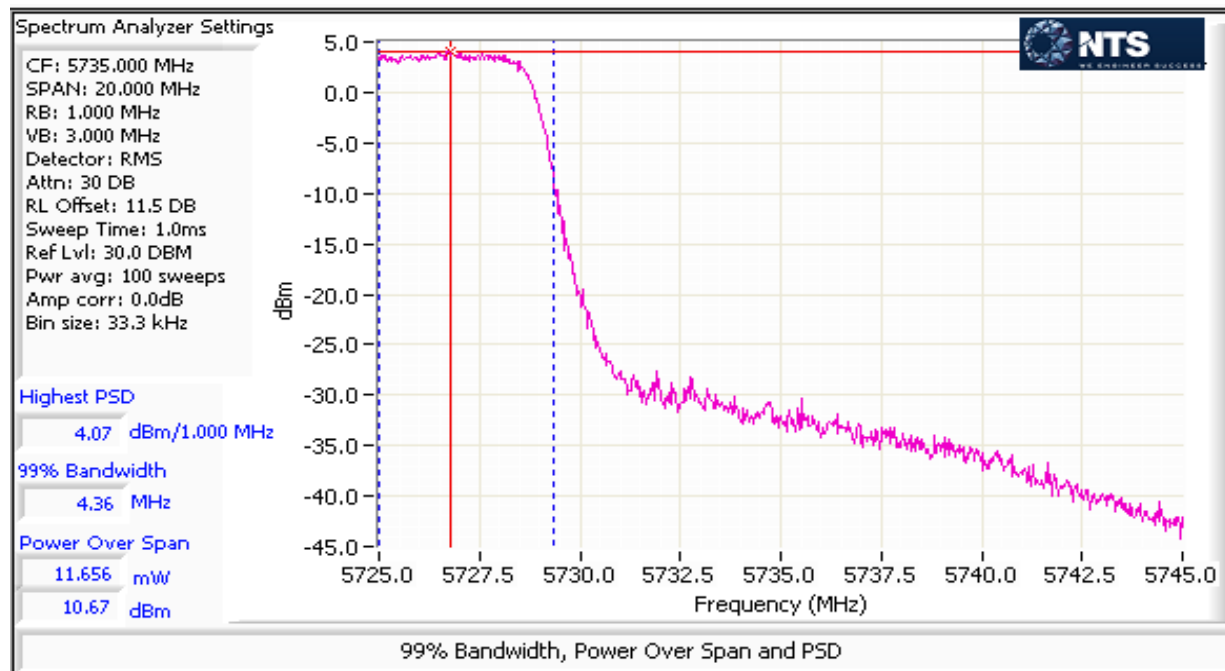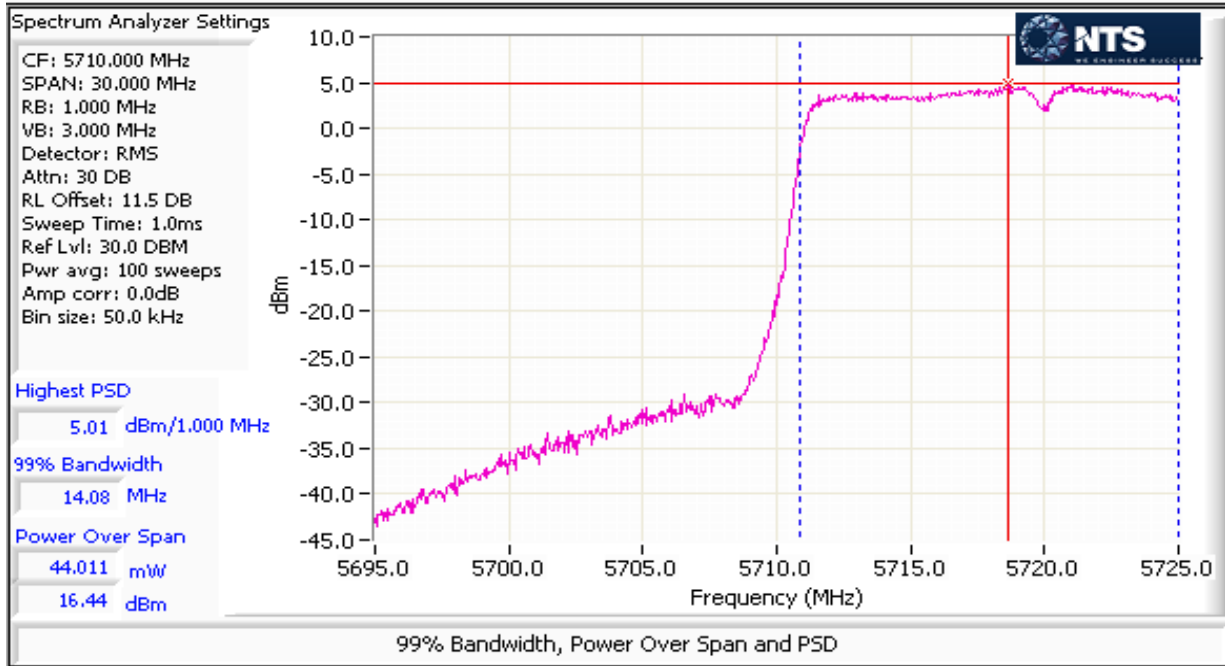

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

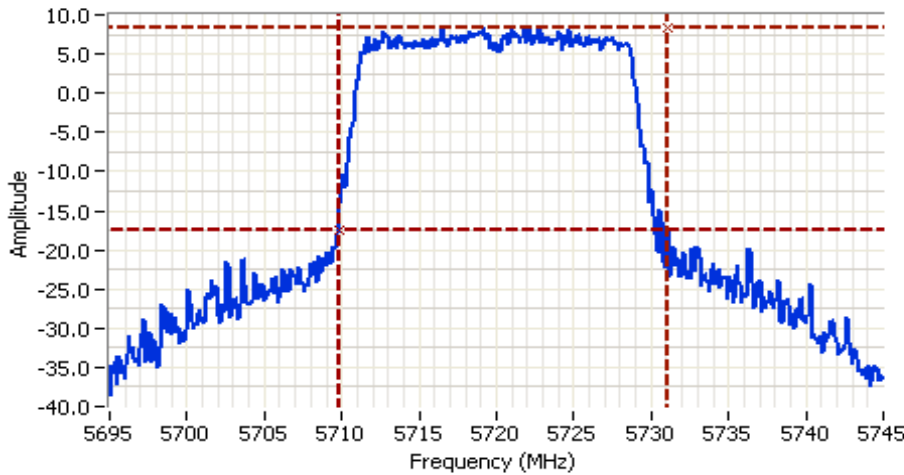

Analyzer Settings

Agilent Technologies, E4446A
 CF: 5720.000 MHz
 SPAN: 50.000 MHz
 RB: 300 kHz
 VB: 910 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.8 DB
 Sweep Time: 1.0ms
 Ref Lvl: 20.0 DBM

Comments

26dB BW: 21.250 MHz
 802.11n 20MHz-Chain 1
 UNII2Ext: 15.167MHz
 UNII3:6.083MHz

Cursor 1	5731.0833	8.41	
Cursor 2	5709.8333	-17.59	

Delta Freq.	21.250
Delta Amplitude	26.00



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

MIMO Device - 5470-5725 MHz Band - FCC

Mode: n40

Max EIRP (mW): 524.61785

Frequency (MHz)	Chain	Software Setting	26dB BW (MHz)	Duty Cycle %	Power dBm	Total Power ¹ mW	dBm	FCC Limit dBm	Max Power (W)	Result			
5510	1	q67	39.6	82	15.9	94.9	19.8	24.0	0.132	Pass			
	2				15.9								
5550	1	q72	39.2	82	17.2	131.8	21.2	24.0		0.132	Pass		
	2				17.4								
5670	1	q72	39.3	82	17.2	128.7	21.1	24.0			0.132	Pass	
	2				17.2								
802.11ac 40MHz													
UNII-2ext													
5710	1	q72	34.733	82	16.8	117.6	20.7	24.0				0.132	Pass
	2				16.9								
UNII-3													
5710	1	q72	4.733	82	6.6	10.9	10.4	17.8	0.132				Pass
	2				6.4								



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

MIMO Device - 5470-5725 MHz Band - Industry Canada

Mode: n40

Max EIRP (mW): 524.6

Frequency (MHz)	Chain	Software Setting	99% BW (MHz)	Duty Cycle %	Power ¹ dBm	Total Power dBm	dBm (eirp)	IC limit dBm	Max Power (W)	Result				
5510	1	q67	36.47	82	15.9	19.8	25.8	24.0	0.132	Pass				
	2				15.9									
5550	1	q72	36.47	82	17.2	21.2	27.2	24.0		0.132	Pass			
	2				17.4									
5670	1	q72	36.34	82	17.2	21.1	27.1	24.0			0.132	Pass		
	2				17.2									
802.11ac 40MHz														
UNII-2ext														
5710	1	q72	33.22	82	16.8	20.7	26.7	24.0				0.132	Pass	
	2				16.9									
UNII-3														
5710	1	q72	3.77	82	6.6	10.4	16.4	16.8					0.132	Pass
	2				6.4									



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

5470-5725 PSD - FCC/IC
Mode: n40

Frequency (MHz)	Chain	Software Setting	99% BW (MHz)	Duty Cycle %	PSD dBm/MHz	Total PSD ¹ mW/MHz	Total PSD ¹ dBm/MHz	FCC Limit dBm/MHz	IC Limit dBm/MHz	Result
5510	1	q67	36.47	82	0.5	2.7	4.3	8.0	11.0	Pass
	2				0.4					
5550	1	q72	36.47	82	1.5	3.6	5.6	8.0	11.0	Pass
	2				1.9					
5670	1	q72	36.34	82	1.4	3.4	5.3	8.0	11.0	Pass
	2				1.5					



802.11ac 20MHz
UNII-2ext

5710	1	q72	33.22	82	1.5	3.4	5.4	8.0	11.0	Pass
	2				1.5					



UNII-3

5710	1	q72	3.77	82	0.9	3.0	4.7	8.0	11.0	Pass
	2				0.8					


Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

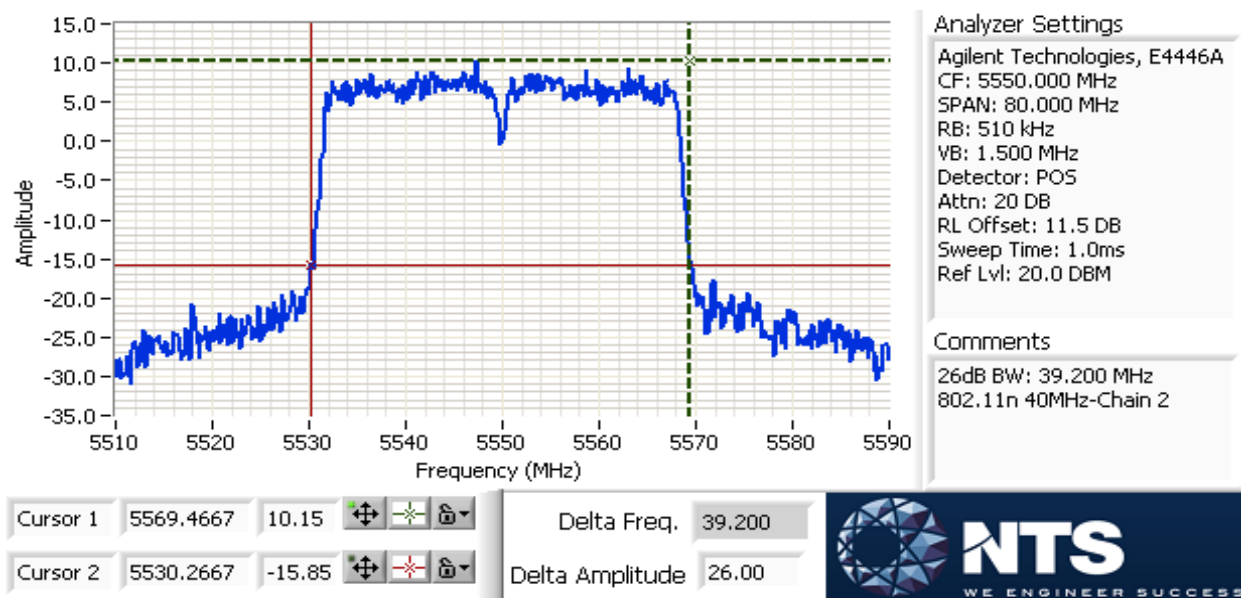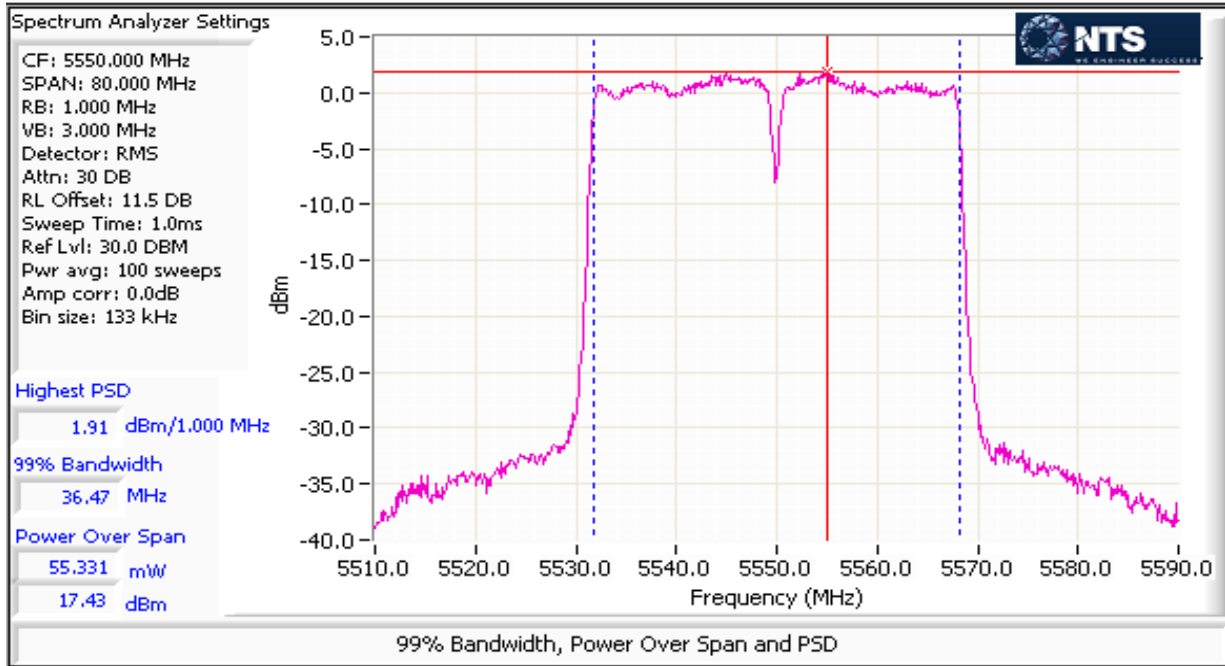

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

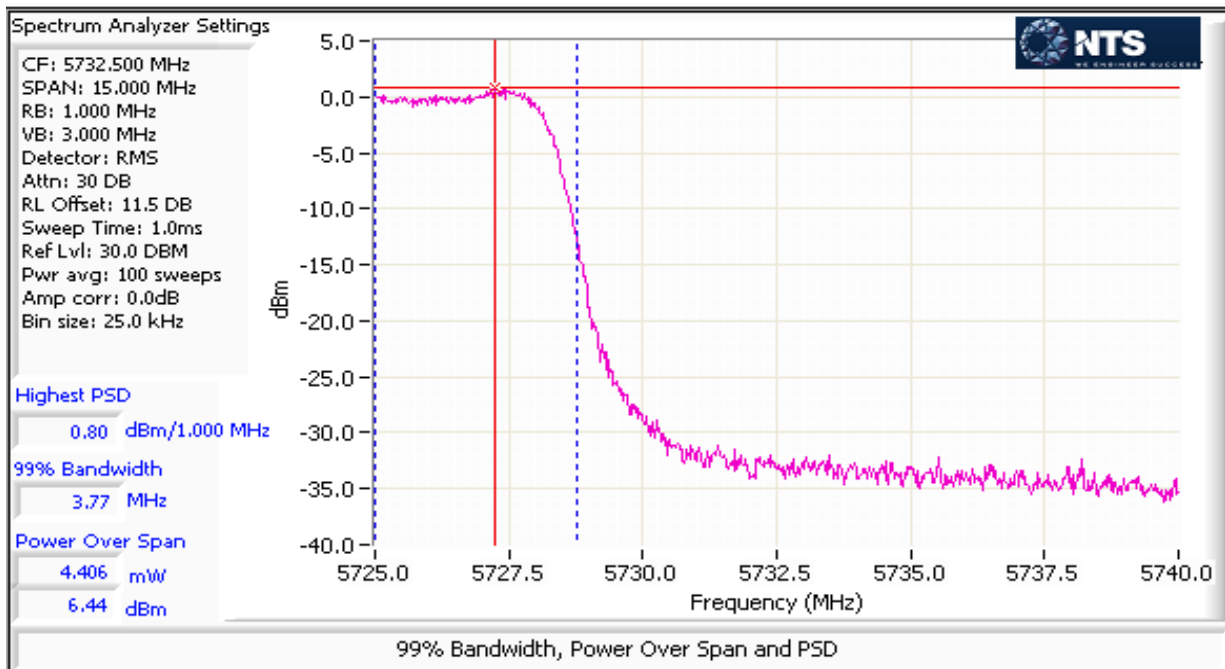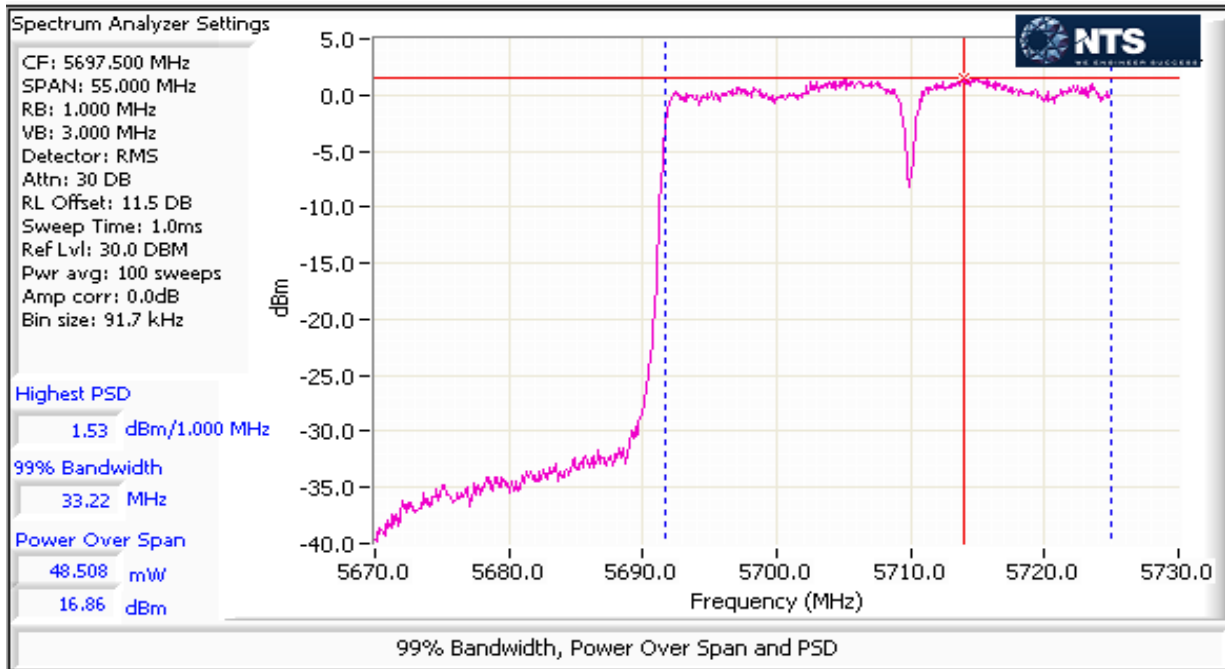

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

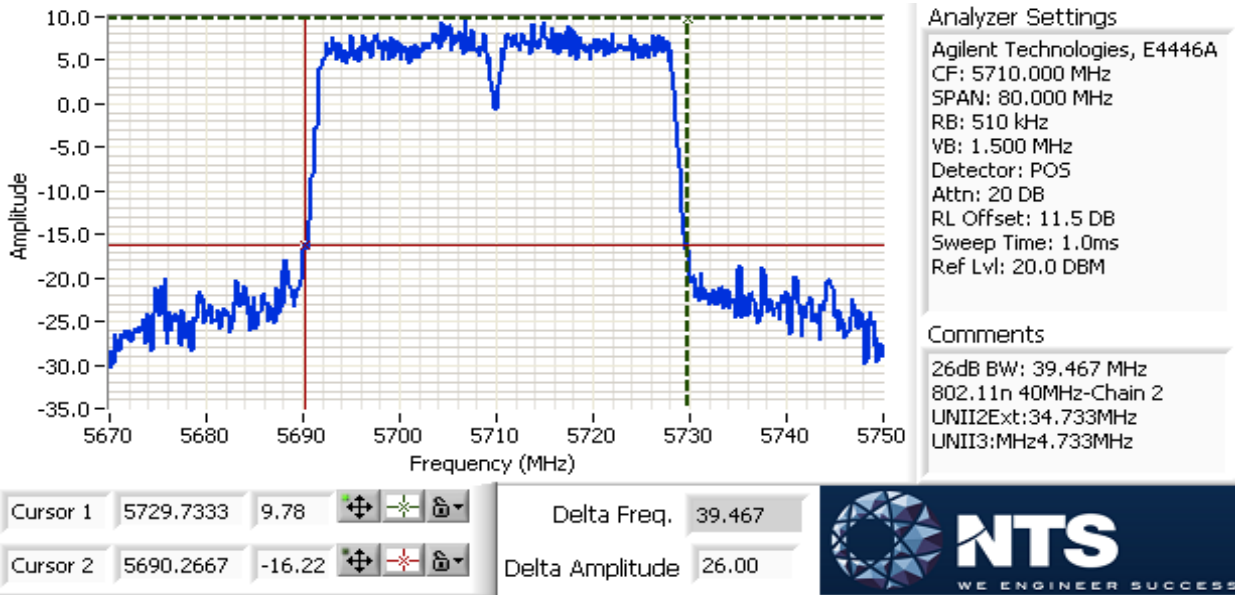



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

MIMO Device - 5470-5725 MHz Band - FCC

Mode: ac80

Max EIRP (mW): 798.26209

Frequency (MHz)	Chain	Software Setting	26dB BW (MHz)	Duty Cycle %	Power dBm	Total Power ¹ mW	dBm	FCC Limit dBm	Max Power (W)	Result		
5530	1	q55	81.33	59	13.2	74.6	18.7	24.0		0.201	Pass	
	2				13.6							
5610	1	q72	81.86	59	17.4	200.5	23.0	24.0	0.201		Pass	
	2				18.0							
802.11ac 80MHz UNII-2ext												
5690	1	q72	76.067	59	17.2	187.2	22.7	24.0			0.201	Pass
	2				17.7							
UNII-3												
5690	1	q72	5.8	59	3.5	8.0	9.1	18.6		0.201		Pass
	2				4.0							



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

MIMO Device - 5470-5725 MHz Band - Industry Canada

Mode: ac80

Max EIRP (mW): 798.3

Frequency (MHz)	Chain	Software Setting	99% BW (MHz)	Duty Cycle %	Power ¹ dBm	Total Power dBm	Total Power dBm (eirp)	IC limit dBm	Max Power (W)	Result		
5530	1	q55	75.54	59	13.2	18.7	24.7	24.0	0.201	Pass		
	2				13.6							
5610	1	q72	75.54	59	17.4	23.0	29.0	24.0		0.201	Pass	
	2				18.0							
802.11ac 20MHz UNII-2ext												
5690	1	q72	72.66	59	17.2	22.7	28.7	24.0			0.201	Pass
	2				17.7							
UNII-3												
5690	1	q72	7.72	59	3.5	9.1	15.1	19.9	0.201			Pass
	2				4.0							



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

5470-5725 PSD - FCC/IC
Mode: ac80

Frequency (MHz)	Chain	Software Setting	99% BW (MHz)	Duty Cycle %	PSD dBm/MHz	Total PSD ¹		FCC Limit dBm/MHz	IC Limit dBm/MHz	Result
						mW/MHz	dBm/MHz			
5530	1	q55	75.54	59	-5.6	1.0	-0.1	8.0	11.0	Pass
	2				-5.2					
5610	1	q72	75.54	59	-1.4	2.6	4.1	8.0	11.0	Pass
	2				-0.9					



802.11ac 20MHz
UNII-2ext

5690	1	q72	72.66	59	-1.5	2.5	4.0	8.0	11.0	Pass
	2				-1.0					



UNII-3

5690	1	q72	7.72	59	-2.5	2.0	3.1	8.0	11.0	Pass
	2				-1.9					

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

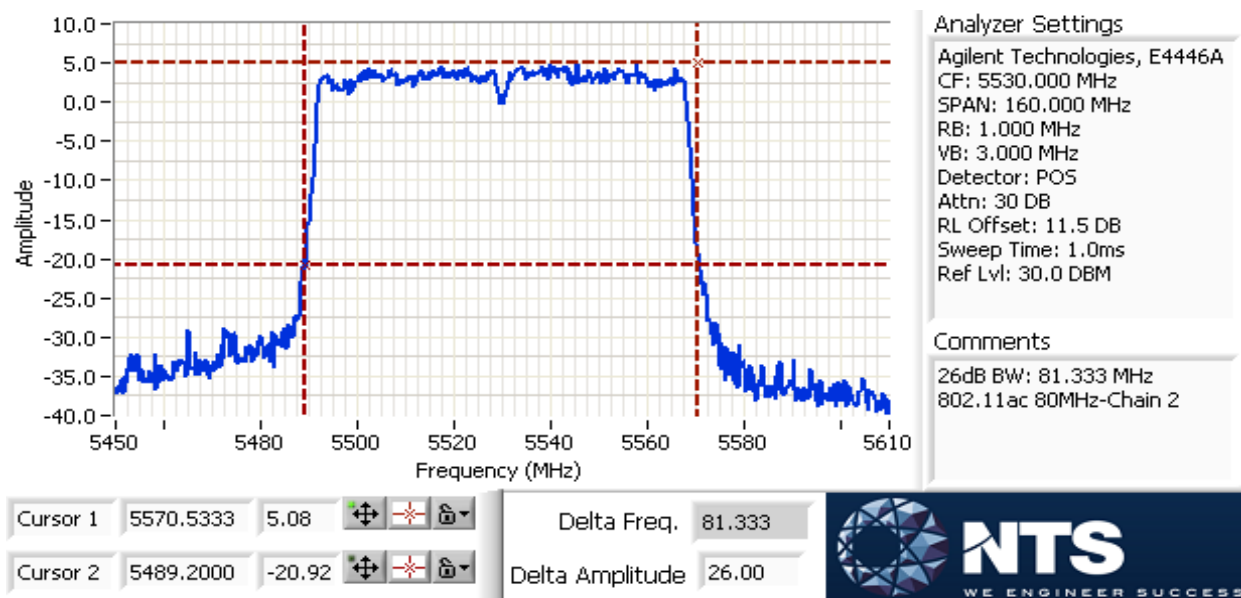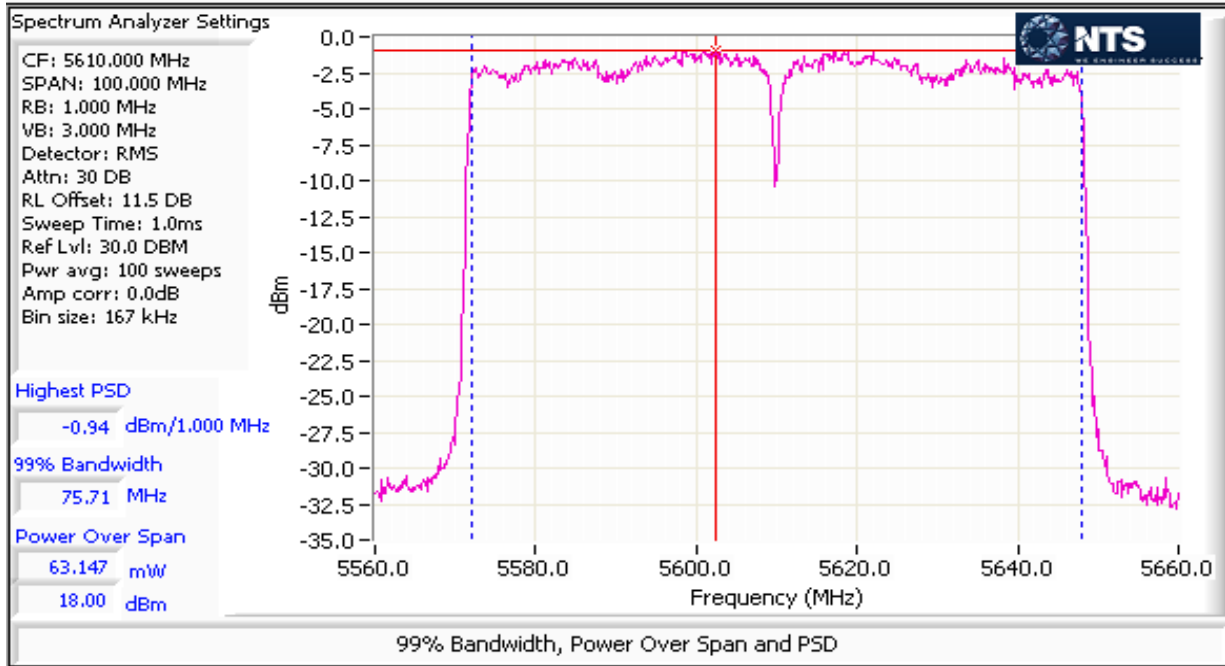


Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

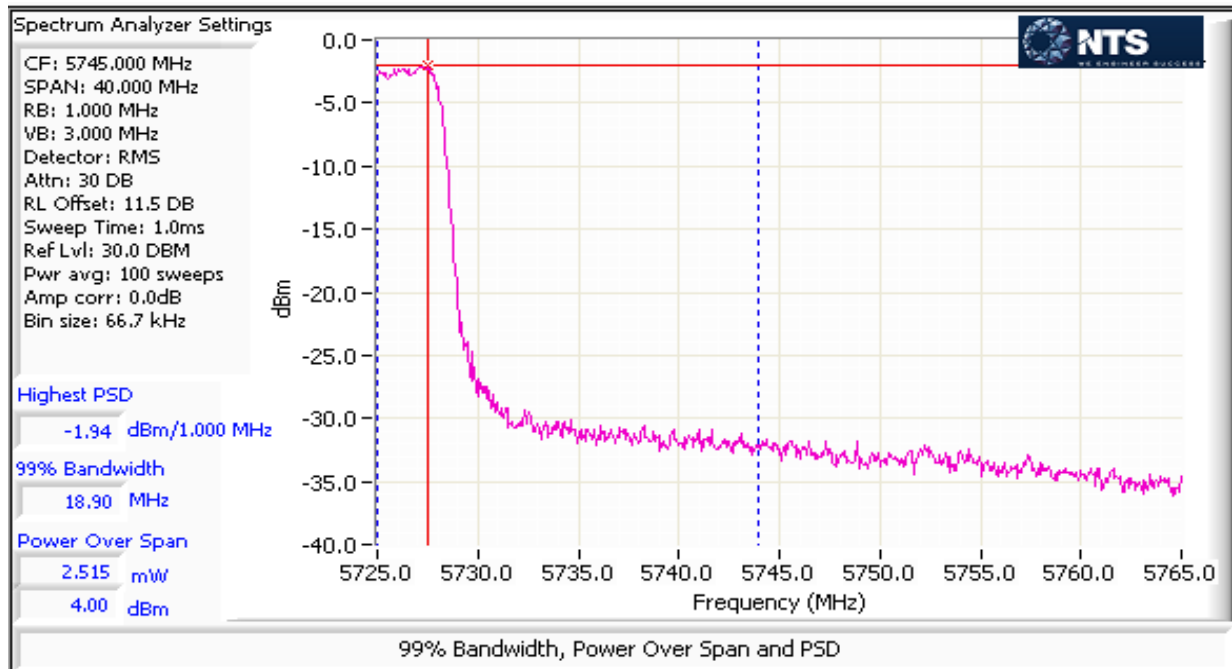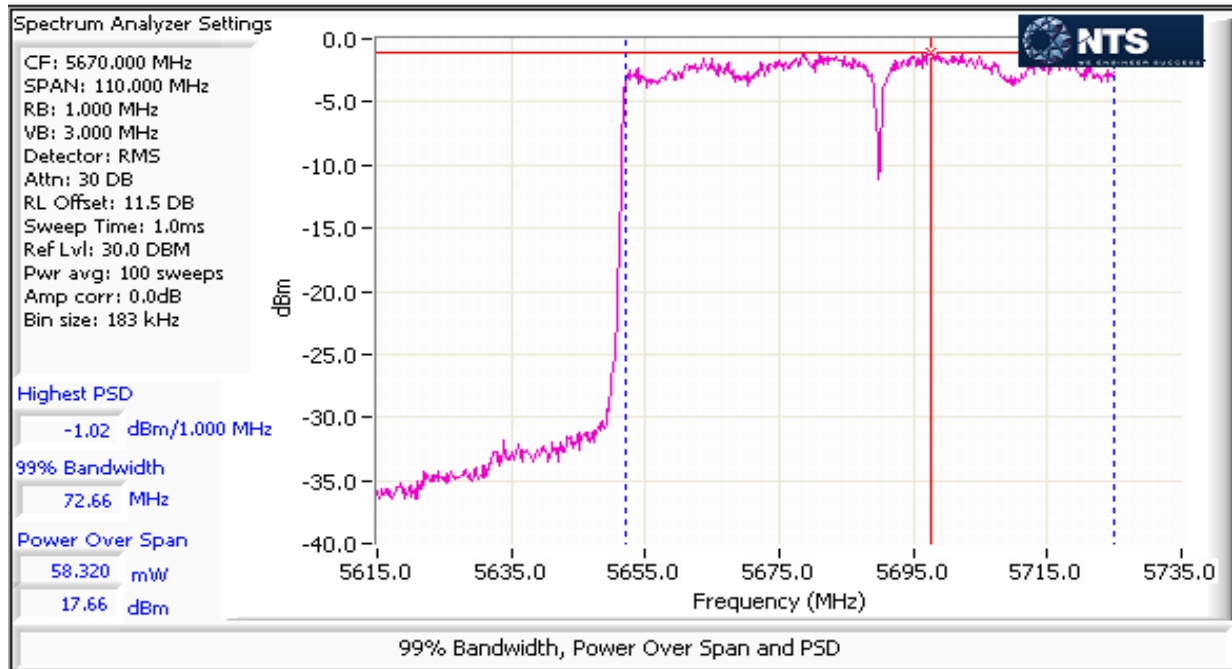



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

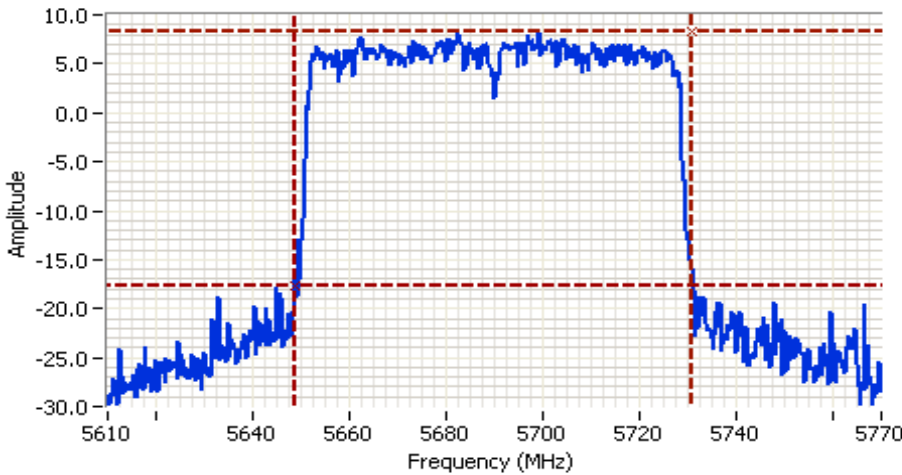

Analyzer Settings

Agilent Technologies, E4446A
 CF: 5690.000 MHz
 SPAN: 160.000 MHz
 RB: 1.000 MHz
 VB: 3.000 MHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.8 DB
 Sweep Time: 1.0ms
 Ref Lvl: 20.0 DBM

Comments

26dB BW: 81.867 MHz
 802.11ac 80MHz-Chain 1
 UNII2Ext:76.067MHz
 UNII3:5.8MHz

Cursor 1	5730.8000	8.31	
Cursor 2	5648.9333	-17.69	

Delta Freq. 81.867
 Delta Amplitude 26.00





EMC Test Data

Client:	Aruba Networks	Job Number:	J96879
Product:	APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless	T-Log Number:	T96923
	Access Points	Project Manager:	Christine Krebill
Contact:	Tian Mendez	Project Coordinator:	
Emissions Standard(s):	FCC 15.247/FCC 15.407/RSS-210/LP0002	Class:	-
Immunity Standard(s):	-	Environment:	-

EMC Test Data

For The

Aruba Networks

Product

APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points

Date of Last Test: 1/5/2015



EMC Test Data

Client:	Aruba Networks	Job Number:	J96879
Model:	APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number:	T96923
Contact:	Tian Mendez	Project Manager:	Christine Krebill
Standard:	FCC 15.247/FCC 15.407/RSS-210/LP0002	Project Coordinator:	-
		Class:	N/A

RSS 210 and FCC 15.407 (UNII) Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. For radiated emissions testing the measurement antenna was located 3 meters from the EUT, unless otherwise noted.

Ambient Conditions: Temperature: 18-20 °C
 Rel. Humidity: 35-45 %

Summary of Results

Run #	Mode	Channel	Target Power	Passing Power Setting	Test Performed	Limit	Result / Margin
20MHz Bandwith Modes							
2	a	64 - 5320MHz	q72	q72	Restricted Band Edge at 5350 MHz	15.209	52.0 dBµV/m @ 5393.2 MHz (-2.0 dB)
3	a	100 - 5500MHz	q72	q72	Restricted Band Edge at 5460 MHz	15.209	52.2 dBµV/m @ 5418.5 MHz (-1.8 dB)
	a	100 - 5500MHz	q72	q72	Band Edge 5460 - 5470 MHz	15E/15.209	69.4 dBµV/m @ 5468.0 MHz (-4.6 dB)
	a	140 - 5700MHz	q72	q69	Band Edge 5725 MHz	15E/15.209	68.2 dBµV/m @ 5725.3 MHz (-0.1 dB)



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Summary of Results (continued)

Run #	Mode	Channel	Target Power	Passing Power Setting	Test Performed	Limit	Result / Margin
20MHz Bandwith Modes (continued)							
6	n20	64 - 5320MHz	q72	q72	Restricted Band Edge at 5350 MHz	15.209	49.9 dB μ V/m @ 5393.4 MHz (-4.1 dB)
7	n20	100 - 5500MHz	q72	q72	Restricted Band Edge at 5460 MHz	15.209	50.6 dB μ V/m @ 5418.7 MHz (-3.4 dB)
	n20	100 - 5500MHz	q72	q72	Band Edge 5460 - 5470 MHz	15E/15.209	51.1 dB μ V/m @ 5470.0 MHz (-2.9 dB)
	n20	140 - 5700MHz	q72	q68	Band Edge 5725MHz	15E/15.209	53.8 dB μ V/m @ 5725.0 MHz (-0.2 dB)



EMC Test Data

Client:	Aruba Networks	Job Number:	J96879
Model:	APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number:	T96923
Contact:	Tian Mendez	Project Manager:	Christine Krebill
Standard:	FCC 15.247/FCC 15.407/RSS-210/LP0002	Project Coordinator:	-
		Class:	N/A

Summary of Results (continued)

Run #	Mode	Channel	Target Power	Passing Power Setting	Test Performed	Limit	Result / Margin
40MHz Bandwith Modes							
10	n40	62 - 5310MHz	q72	q67	Restricted Band Edge at 5350 MHz	15.209	53.2 dBµV/m @ 5350.0 MHz (-0.9 dB)
11	n40	102 - 5510MHz	q72	q67	Restricted Band Edge at 5460 MHz	15.209	48.0 dBµV/m @ 5460.0 MHz (-6.1 dB)
	n40	102 - 5510MHz	q72	q67	Band Edge 5460 - 5470 MHz	15E/15.209	53.9 dBµV/m @ 5470.0 MHz (-0.1 dB)
	n40	134 - 5670MHz	q72	q72	Band Edge 5725MHz	15E	66.6 dBµV/m @ 5734.4 MHz (-1.7 dB)



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Summary of Results (continued)

Run #	Mode	Channel	Target Power	Passing Power Setting	Test Performed	Limit	Result / Margin
80MHz Bandwith Modes							
14	ac80	58 - 5290MHz	q72	q58	Restricted Band Edge at 5350 MHz	15.209	53.1 dBµV/m @ 5352.2 MHz (-0.9 dB)
15	ac80	106 - 5530MHz	q72	q55	Restricted Band Edge at 5460 MHz	15.209	53.9 dBµV/m @ 5458.7 MHz (-0.1 dB)
	ac80	106 - 5530MHz	q72	q55	Band Edge 5460 - 5470 MHz	15E	65.4 dBµV/m @ 5466.2 MHz (-2.9 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client:	Aruba Networks	Job Number:	J96879
Model:	APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number:	T96923
		Project Manager:	Christine Krebill
Contact:	Tian Mendez	Project Coordinator:	-
Standard:	FCC 15.247/FCC 15.407/RSS-210/LP0002	Class:	N/A

Procedure Comments:

Measurements performed in accordance with FCC KDB 789033

Peak measurements performed with: RBW=1MHz, VBW=3MHz, peak detector, max hold, auto sweep time

Unless otherwise stated/noted, emission has duty cycle $\geq 98\%$ and was measured using RBW=1MHz, VBW=10Hz, peak detector, linear average mode, auto sweep time, max hold.

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
11a	6Mbs	0.99	Yes	2.063	0.0	0.0	485
n20	MCS8	0.99	Yes	1.942	0.0	0.0	515
n40	MCS8	0.82	Yes	0.938	0.9	1.75	1066
ac80	VHT0	0.59	Yes	0.256	2.3	4.62	3906

Sample Notes

Sample S/N: Prototype (NTS Sample: 2014-2278)

Driver: 6.37 RC 14.54

Pkteng tx 20 1500 0

Antenna: Internal

Measurement Specific Notes:

Note 1:	For emissions outside of the restricted bands the limit is -27dBm/MHz eirp (68.3dBuV/m). The measurement method required is a peak measurement (RB=1MHz, VB \geq 3MHz, peak detector). Per KDB 789033 2) c) (i), compliance can be demonstrated by meeting the average and peak limits of 15.209, as an alternative.
Note 2:	Emission has duty cycle $\geq 98\%$, average measurement performed: RBW=1MHz, VBW=3MHz, RMS, Power averaging, auto sweep, trace average 100 traces
Note 3:	Emission has duty cycle $< 98\%$, but constant, average measurement performed: RBW=1MHz, VBW=10Hz, peak detector, linear averaging, auto sweep, trace average 100 * 1/DC traces, measurement corrected by Linear Voltage correction factor
Note 4:	Emission has duty cycle $< 98\%$ and is NOT constant, average measurement performed: RBW=1MHz, VBW $> 1/T$, peak detector, linear average mode, sweep time auto, max hold. Max hold for 50*(1/DC) traces
Note 5:	Emission has duty cycle $< 98\%$, but constant, average measurement performed: RBW=1MHz, VBW=3MHz, RMS, Power averaging, auto sweep, trace average 100 * 1/DC traces, measurement corrected by Pwr correction factor
Note 6:	Plots of the average and peak bandedge do not account for any duty cycle correction. Refer to the tabluar results for final measurements.

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Run #2: Radiated Bandedge Measurements, 5250-5350MHz

Date of Test: 12/16/14

Test Location: Chamber #3

Test Engineer: Mehran Birgani

EUT Voltage: 120V/ 60Hz

Channel: 64 - 5320MHz


Mode: a

Tx Chain: 2Tx

Data Rate: 6Mbps

5350 MHz Band Edge Signal Radiated Field Strength

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5393.210	52.0	H	54.0	-2.0	AVG	48	1.3	POS; RB 1 MHz; VB: 10 Hz
5402.600	51.2	V	54.0	-2.8	AVG	18	1.9	POS; RB 1 MHz; VB: 10 Hz
5393.210	64.4	H	74.0	-9.6	PK	48	1.3	POS; RB 1 MHz; VB: 3 MHz
5352.810	64.2	V	74.0	-9.8	PK	18	1.9	POS; RB 1 MHz; VB: 3 MHz

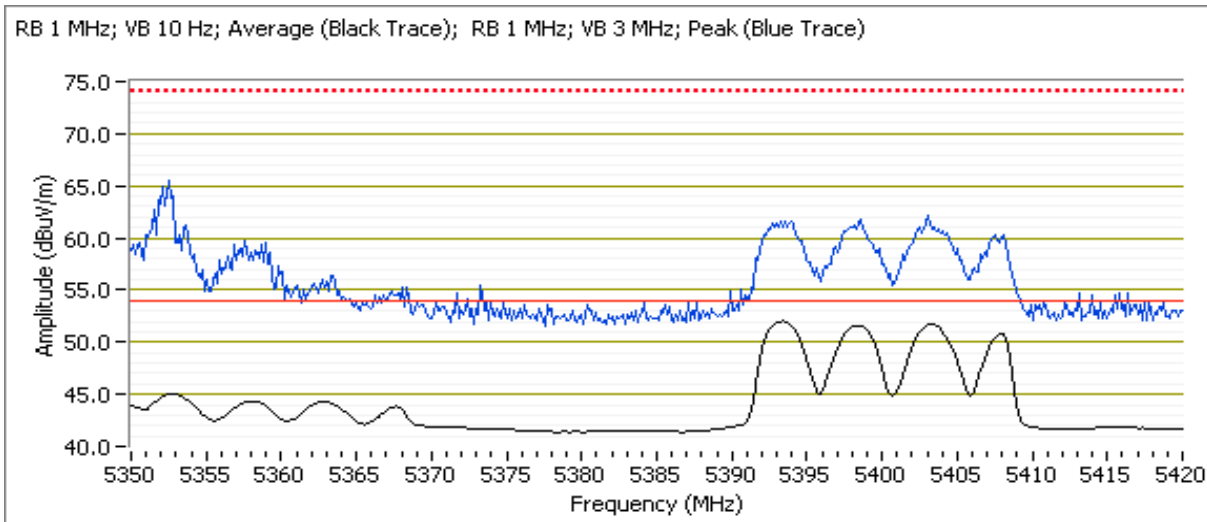

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Run #3: Radiated Bandedge Measurements, 5470-5725MHz

Date of Test: 12/23/14

Test Location: Chamber #4

Test Engineer: Deniz Demirci

EUT Voltage: 120 VAC / 60 Hz

Channel: 100 - 5500MHz

Mode: a

Tx Chain: 2Tx


Data Rate: 6Mbps

5460 MHz Band Edge Signal Radiated Field Strength

Frequency	Level	Pol	FCC 15.209		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5418.500	52.2	H	54.0	-1.8	AVG	40	1.1	POS; RB 1 MHz; VB: 10 Hz
5418.500	62.6	H	74.0	-11.4	PK	40	1.1	POS; RB 1 MHz; VB: 3 MHz
5417.780	52.2	V	54.0	-1.8	AVG	19	2.1	POS; RB 1 MHz; VB: 10 Hz
5418.140	62.0	V	74.0	-12.0	PK	19	2.1	POS; RB 1 MHz; VB: 3 MHz

5470 MHz Band Edge Signal Radiated Field Strength

Frequency	Level	Pol	15.E		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
5468.020	69.4	H	74.0	-4.6	PK	40	1.1	POS; RB 1 MHz; VB: 3 MHz
5469.560	49.1	H	54.0	-4.9	AVG	40	1.1	POS; RB 1 MHz; VB: 10 Hz
5467.860	49.2	V	54.0	-4.8	AVG	19	2.1	POS; RB 1 MHz; VB: 10 Hz
5466.590	70.1	V	74.0	-3.9	PK	19	2.1	POS; RB 1 MHz; VB: 3 MHz

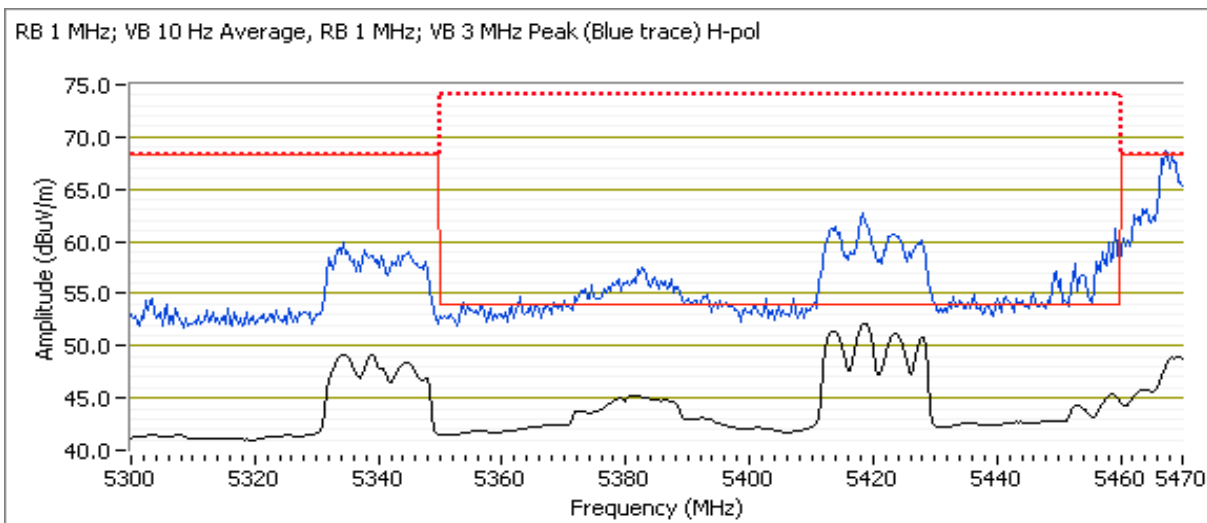




EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A


Channel: 140 - 5700MHz
 Tx Chain: 2Tx
 Mode: a
 Data Rate: 6Mbps

5725 MHz Band Edge Signal Radiated Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	15.E		Detector PK/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5725.020	53.9	H	54.0	-0.1	AVG	45	1.1	POS; RB 1 MHz; VB: 10 Hz
5725.550	73.5	H	74.0	-0.5	PK	45	1.1	POS; RB 1 MHz; VB: 3 MHz
5773.620	65.4	H	68.3	-2.9	PK	45	1.1	POS; RB 1 MHz; VB: 3 MHz
5726.460	53.3	V	54.0	-0.7	AVG	10	2.4	POS; RB 1 MHz; VB: 10 Hz
5726.900	73.3	V	74.0	-0.7	PK	10	2.4	POS; RB 1 MHz; VB: 3 MHz
5772.720	64.6	V	68.3	-3.7	PK	10	2.4	POS; RB 1 MHz; VB: 3 MHz

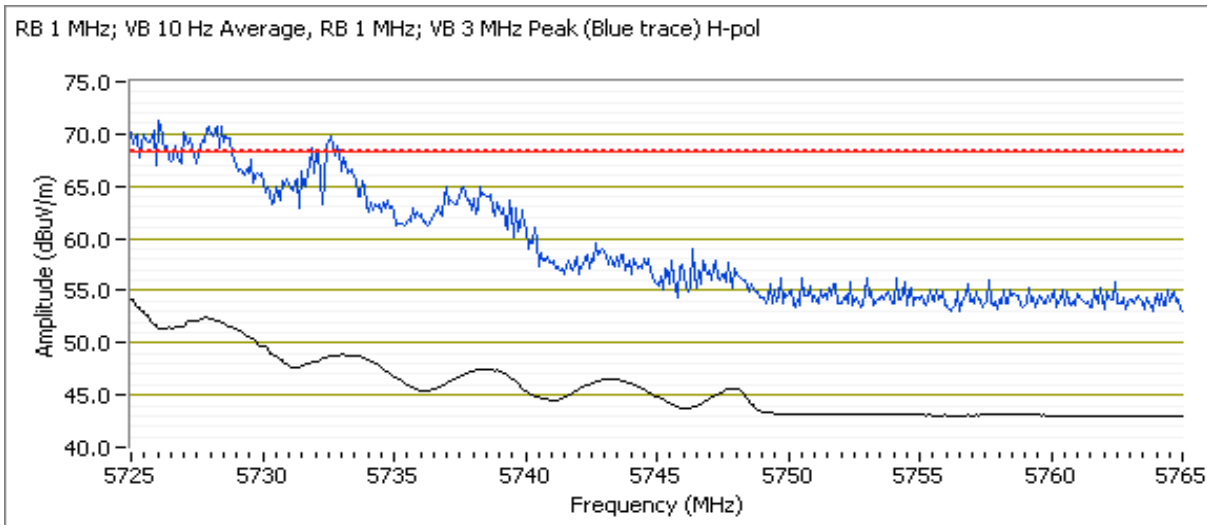

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

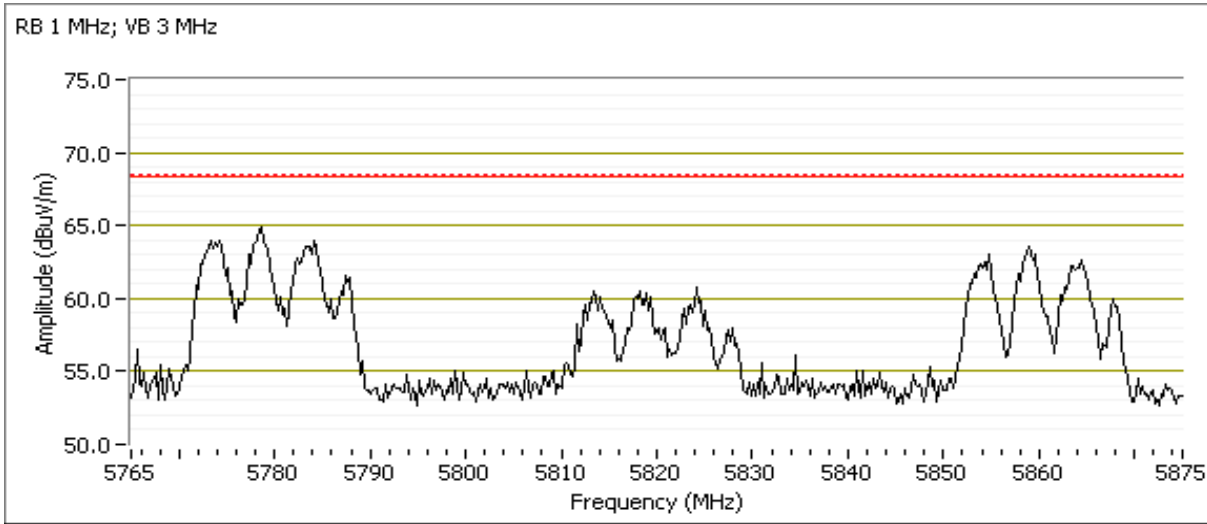




EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Run #6: Radiated Bandedge Measurements, 5250-5350MHz
 Date of Test: 12/17/14 Test Location: Chamber #3
 Test Engineer: Jack Liu EUT Voltage: 120V/ 60Hz
 Channel: 64 - 5320MHz Mode: n20
 Tx Chain: 2Tx Data Rate: MCS8

5350 MHz Band Edge Signal Radiated Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	FCC 15.209		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5393.430	49.9	H	54.0	-4.1	AVG	47	1.4	POS; RB 1 MHz; VB: 10 Hz
5401.360	65.6	H	74.0	-8.4	PK	47	1.4	POS; RB 1 MHz; VB: 3 MHz
5407.540	49.6	V	54.0	-4.4	AVG	23	2.3	POS; RB 1 MHz; VB: 10 Hz
5394.090	62.2	V	74.0	-11.8	PK	23	2.3	POS; RB 1 MHz; VB: 3 MHz

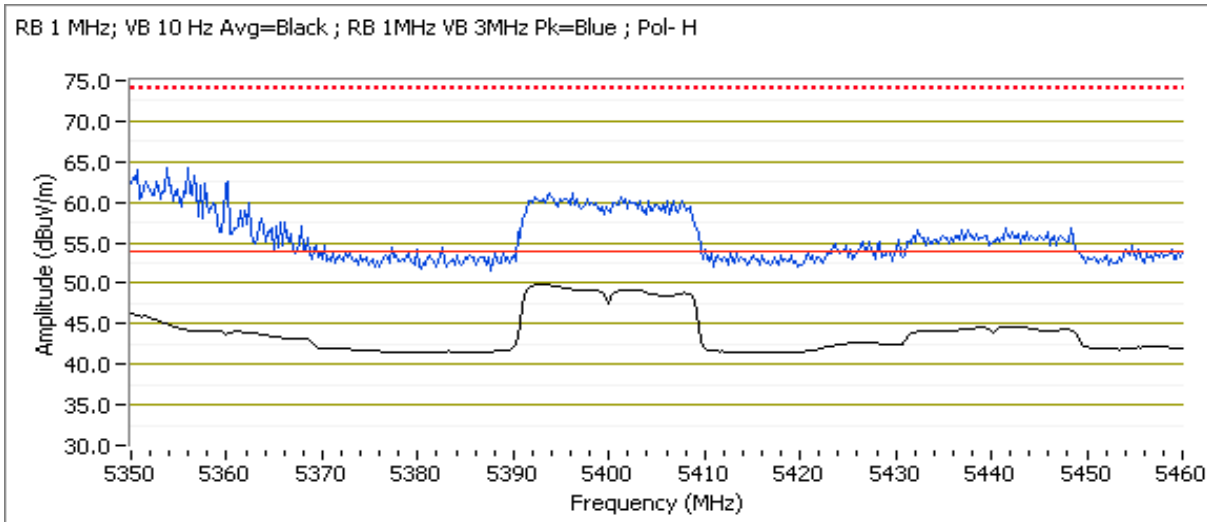

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A


Run #7: Radiated Bandedge Measurements, 5470-5725MHz
 Date of Test: 12/23/14 Test Location: Chamber #4
 Test Engineer: Deniz Demirci EUT Voltage: 120 VAC / 60 Hz
 Channel: 100 - 5500MHz Mode: n20
 Tx Chain: 2Tx Data Rate: MCS8

5460 MHz Band Edge Signal Radiated Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	FCC 15.209		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5418.670	50.6	H	54.0	-3.4	AVG	40	1.1	POS; RB 1 MHz; VB: 10 Hz
5418.540	62.4	H	74.0	-11.6	PK	40	1.1	POS; RB 1 MHz; VB: 3 MHz
5418.580	50.3	V	54.0	-3.7	AVG	12	2.1	POS; RB 1 MHz; VB: 10 Hz
5421.100	62.1	V	74.0	-11.9	PK	12	2.1	POS; RB 1 MHz; VB: 3 MHz

5470 MHz Band Edge Signal Radiated Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	15.E		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5469.980	51.1	H	54.0	-2.9	AVG	40	1.1	POS; RB 1 MHz; VB: 10 Hz
5469.880	71.0	H	74.0	-3.0	PK	40	1.1	POS; RB 1 MHz; VB: 3 MHz
5470.000	50.7	V	54.0	-3.3	AVG	12	2.1	POS; RB 1 MHz; VB: 10 Hz
5469.920	70.4	V	74.0	-3.6	PK	12	2.1	POS; RB 1 MHz; VB: 3 MHz

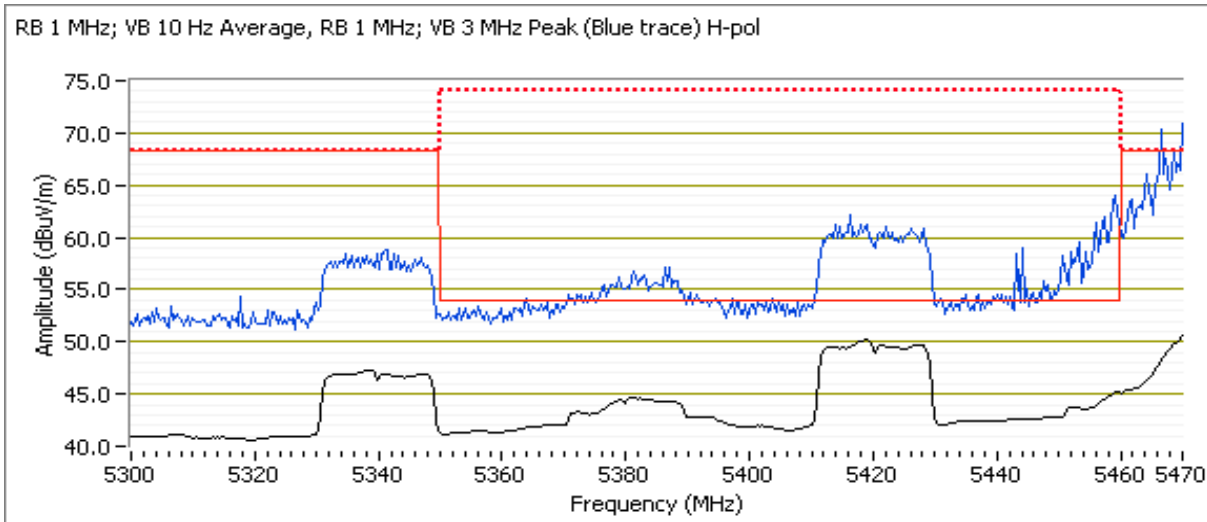




EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A


Channel: 140 - 5700MHz
 Tx Chain: 2Tx
 Mode: n20
 Data Rate:

5725 MHz Band Edge Signal Radiated Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	15.E		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5725.000	53.8	H	54.0	-0.2	AVG	38	1.0	POS; RB 1 MHz; VB: 10 Hz
5725.120	71.4	H	74.0	-2.6	PK	38	1.0	POS; RB 1 MHz; VB: 3 MHz
5783.080	63.2	H	68.3	-5.1	PK	38	1.0	POS; RB 1 MHz; VB: 3 MHz
5725.040	52.6	V	54.0	-1.4	AVG	12	2.4	POS; RB 1 MHz; VB: 10 Hz
5725.300	69.7	V	74.0	-4.3	PK	12	2.4	POS; RB 1 MHz; VB: 3 MHz
5772.360	62.3	V	68.3	-6.0	PK	12	2.4	POS; RB 1 MHz; VB: 3 MHz

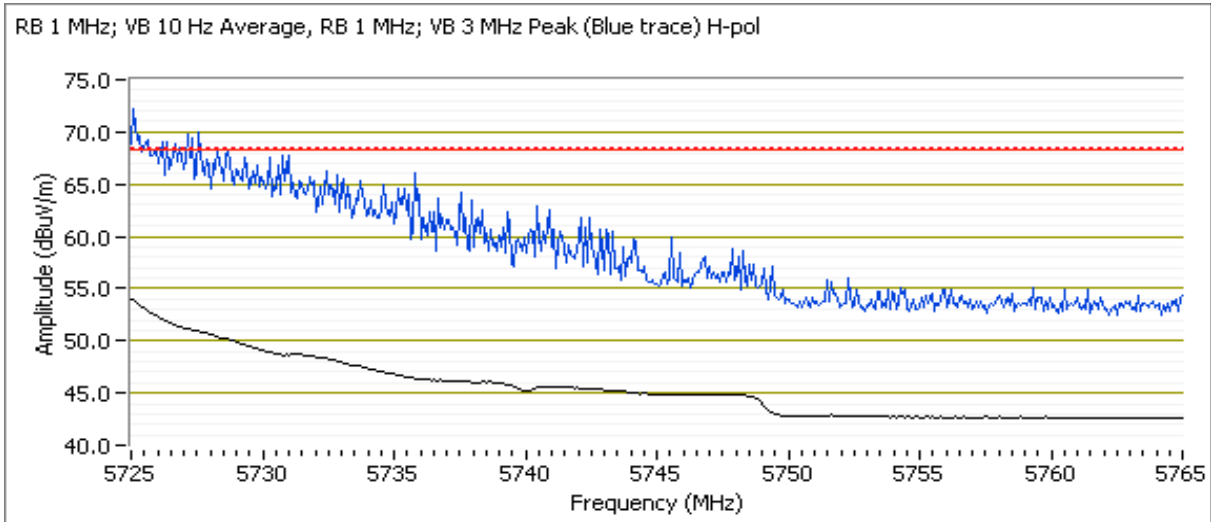

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

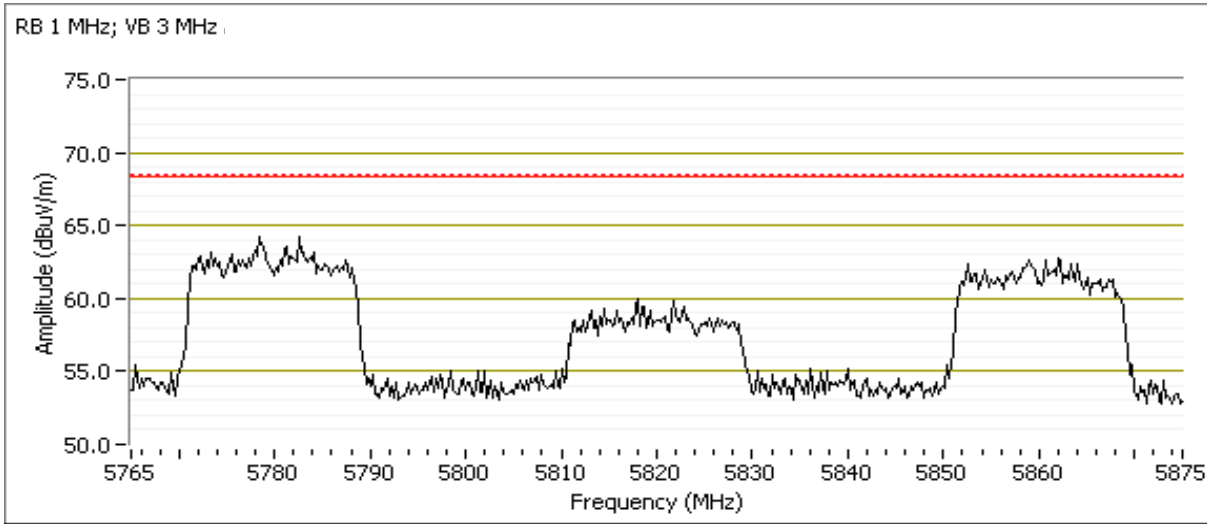




EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Run #10: Radiated Bandedge Measurements, 5250-5350MHz
 Date of Test: 12/17/14 Test Location: Chamber #3
 Test Engineer: Jack Liu EUT Voltage: 120V/ 60Hz
 Channel: 62 - 5310MHz Mode: n40
 Tx Chain: 2Tx Data Rate: MCS8

5350 MHz Band Edge Signal Radiated Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	FCC 15.209		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5350.000	53.2	H	54.0	-0.9	AVG	48	1.2	Note3;POS; RB 1 MHz; VB: 10 Hz
5352.420	68.0	H	74.0	-6.0	PK	48	1.2	POS; RB 1 MHz; VB: 3 MHz
5350.000	52.5	V	54.0	-1.6	AVG	20	2.6	Note3;POS; RB 1 MHz; VB: 10 Hz
5350.000	68.8	V	74.0	-5.2	PK	20	2.6	POS; RB 1 MHz; VB: 3 MHz

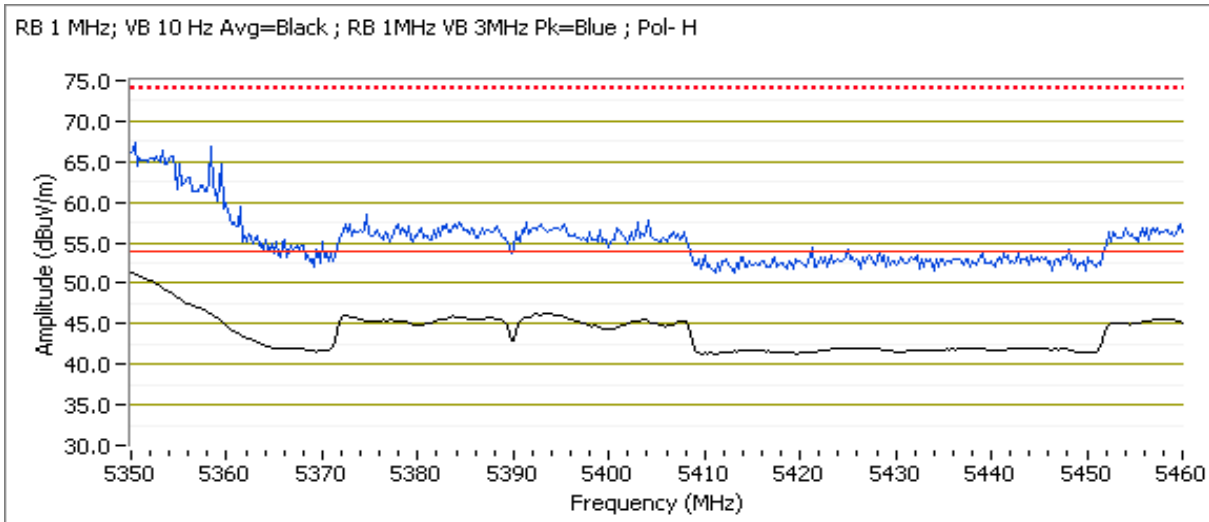

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A


Run #11: Radiated Bandedge Measurements, 5470-5725MHz
 Date of Test: 12/23/14 Test Location: Chamber #4
 Test Engineer: Deniz Demirci EUT Voltage: 120 VAC / 60 Hz
 Channel: 102 - 5510MHz Mode: n40
 Tx Chain: 2Tx Data Rate: MCS8

5460 MHz Band Edge Signal Radiated Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	FCC 15.209		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5459.980	48.0	H	54.0	-6.1	AVG	39	1.2	Note3;POS; RB 1 MHz; VB: 10 Hz
5458.840	63.9	H	74.0	-10.1	PK	39	1.2	POS; RB 1 MHz; VB: 3 MHz
5460.000	47.8	V	54.0	-6.3	AVG	17	2.4	Note3;POS; RB 1 MHz; VB: 10 Hz
5457.920	62.1	V	74.0	-11.9	PK	17	2.4	POS; RB 1 MHz; VB: 3 MHz

5470 MHz Band Edge Signal Radiated Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	15.E/15.209		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5469.960	53.9	H	54.0	-0.1	AVG	39	1.2	Note3;POS; RB 1 MHz; VB: 10 Hz
5467.600	72.1	H	74.0	-1.9	PK	39	1.2	POS; RB 1 MHz; VB: 3 MHz
5470.000	53.5	V	54.0	-0.5	AVG	17	2.4	Note3;POS; RB 1 MHz; VB: 10 Hz
5467.090	71.3	V	74.0	-2.7	PK	17	2.4	POS; RB 1 MHz; VB: 3 MHz

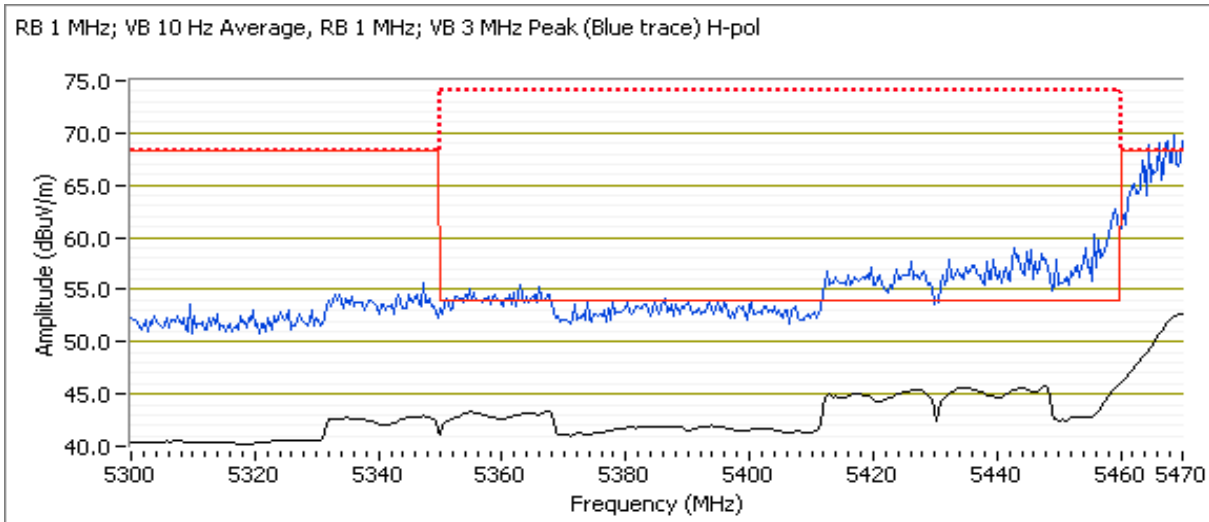




EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Channel: 134 - 5670MHz
 Tx Chain: 2Tx
 Mode: n40
 Data Rate: MCS8

5725 MHz Band Edge Signal Radiated Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	15.E		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5734.420	66.6	H	68.3	-1.7	PK	40	1.1	POS; RB 1 MHz; VB: 3 MHz
5726.520	66.4	V	68.3	-1.9	PK	16	2.0	POS; RB 1 MHz; VB: 3 MHz

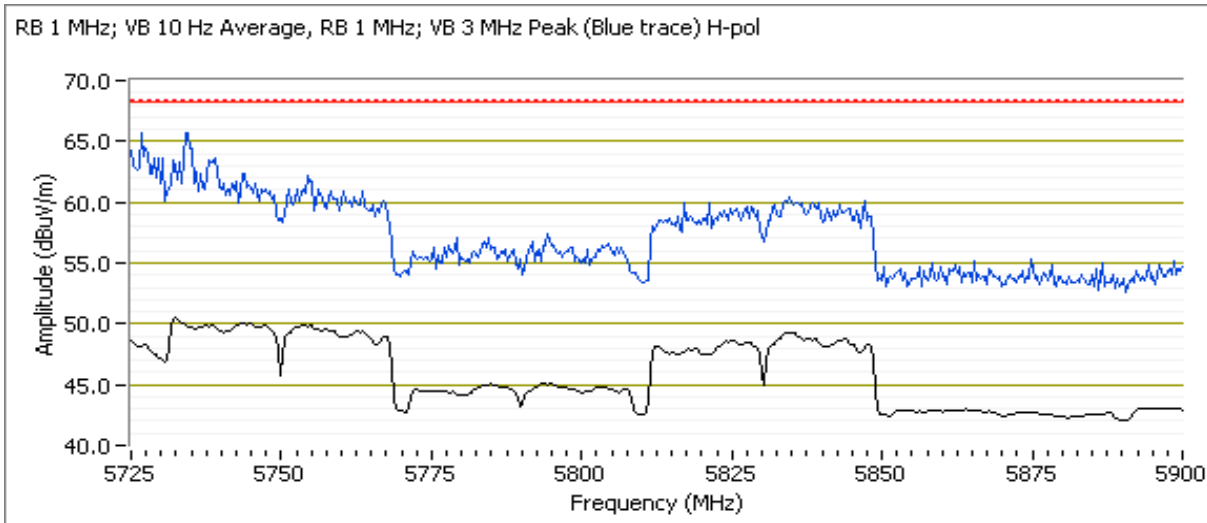



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Run #14: Radiated Bandedge Measurements, 5250-5350MHz

Date of Test: 12/17/14

Test Location: Chamber #3

Test Engineer: M. Birgani

EUT Voltage: 120V/ 60Hz

Channel: 58 - 5290MHz


Mode: ac80

Tx Chain: 2Tx

Data Rate: VHT0

5350 MHz Band Edge Signal Radiated Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	FCC 15.209		Detector PK/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5352.200	53.1	H	54.0	-0.9	AVG	47	1.1	Note3;POS; RB 1 MHz; VB: 10 Hz
5351.600	52.6	V	54.0	-1.4	AVG	15	2.4	Note3;POS; RB 1 MHz; VB: 10 Hz
5372.240	64.5	H	74.0	-9.5	PK	47	1.1	POS; RB 1 MHz; VB: 3 MHz
5365.830	63.1	V	74.0	-10.9	PK	15	2.4	POS; RB 1 MHz; VB: 3 MHz

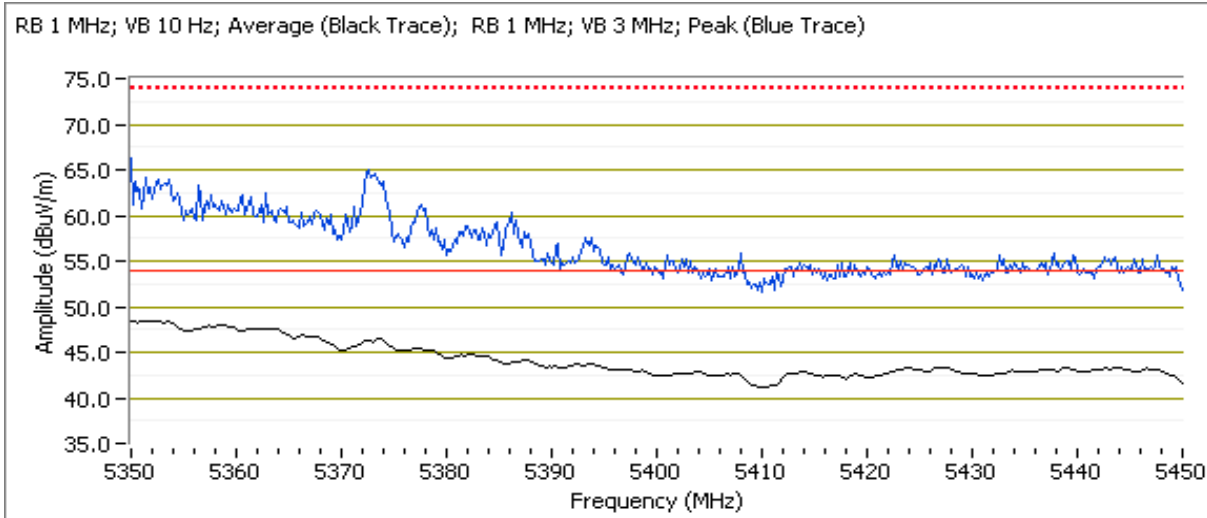



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A


Run #15: Radiated Bandedge Measurements, 5470-5725MHz
 Date of Test: 12/23/14 Test Location: Chamber #4
 Test Engineer: Deniz Demirci EUT Voltage: 120 VAC / 60 Hz
 Channel: 106 - 5530MHz Mode: ac80
 Tx Chain: 2Tx Data Rate: VHT0

5460 MHz Band Edge Signal Radiated Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	FCC 15.209		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5458.710	53.9	H	54.0	-0.1	AVG	45	1.2	Note3;POS; RB 1 MHz; VB: 10 Hz
5458.740	53.7	V	54.0	-0.3	AVG	19	2.4	Note3;POS; RB 1 MHz; VB: 10 Hz
5457.840	64.9	H	74.0	-9.1	PK	45	1.2	POS; RB 1 MHz; VB: 3 MHz
5457.290	63.8	V	74.0	-10.2	PK	19	2.4	POS; RB 1 MHz; VB: 3 MHz

5470 MHz Band Edge Signal Radiated Field Strength

Frequency MHz	Level dB μ V/m	Pol v/h	15.E		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5466.190	65.4	V	68.3	-2.9	PK	19	2.4	POS; RB 1 MHz; VB: 3 MHz
5468.540	65.2	H	68.3	-3.1	PK	45	1.2	POS; RB 1 MHz; VB: 3 MHz

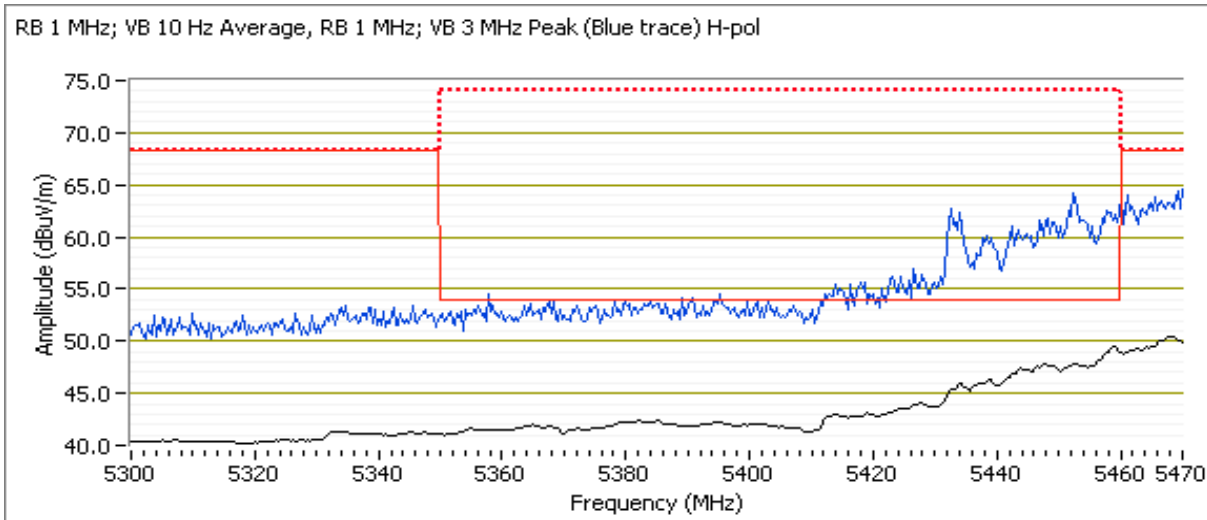



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

RSS 210 and FCC 15.407 (UNII) Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. For radiated emissions testing the measurement antenna was located 3 meters from the EUT, unless otherwise noted.

Ambient Conditions: Temperature: 18-22 °C
Rel. Humidity: 30-40 %

Summary of Results

Run #	Mode	Channel	Target Power	Passing Power	Test Performed	Limit	Result / Margin
Scans on "center" channel in all four OFDM modes to determine the worst case mode.							
3	a	60 - 5300MHz	q72	q72	Radiated Emissions, 1 - 40 GHz	FCC 15.209 / 15 E	53.9 dBµV/m @ 5458.6 MHz (-0.1 dB)
	n20	60 - 5300MHz	q72	q72	Radiated Emissions, 1 - 40 GHz	FCC 15.209 / 15 E	53.2 dBµV/m @ 5458.8 MHz (-0.8 dB)
	n40	54 - 5270MHz	q72	q72	Radiated Emissions, 1 - 40 GHz	FCC 15.209 / 15 E	51.7 dBµV/m @ 5436.3 MHz (-2.4 dB)
	ac80	58 - 5290MHz	q72	q72	Radiated Emissions, 1 - 40 GHz	FCC 15.209 / 15 E	52.3 dBµV/m @ 5458.8 MHz (-1.7 dB)



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Summary of Results (continued)

Run #	Mode	Channel	Target Power	Passing Power	Test Performed	Limit	Result / Margin
Measurements on low and high channels in worst-case OFDM mode.							
4	a	52 - 5260MHz	q72	q72	Radiated Emissions, 1 - 40 GHz	FCC 15.209 / 15 E	57.9 dBµV/m @ 7013.4 MHz (-10.4 dB)
	a	64 - 5320MHz	q72	q72	Radiated Emissions, 1 - 40 GHz	FCC 15.209 / 15 E	63.9 dBµV/m @ 5483.2 MHz (-4.4 dB)
Scans on "center" channel in all four OFDM modes to determine the worst case mode.							
5	a	116 - 5580MHz	q72	q72	Radiated Emissions, 1 - 40 GHz	FCC 15.209 / 15 E	49.3 dBµV/m @ 7440.0 MHz (-4.7 dB)
	n20	116 - 5580MHz	q72	q72	Radiated Emissions, 1 - 40 GHz	FCC 15.209 / 15 E	48.1 dBµV/m @ 7439.9 MHz (-5.9 dB)
	n40	110 - 5550MHz	q72	q72	Radiated Emissions, 1 - 40 GHz	FCC 15.209 / 15 E	50.0 dBµV/m @ 7400.0 MHz (-4.1 dB)
	ac80	106 - 5530MHz	q72	q72	Radiated Emissions, 1 - 40 GHz	FCC 15.209 / 15 E	53.7 dBµV/m @ 7373.3 MHz (-0.3 dB)
Measurements on low and high channels in worst-case OFDM mode.							
6	ac80	138 - 5690MHz	q72	q72	Radiated Emissions, 1 - 40 GHz	FCC 15.209 / 15 E	51.2 dBµV/m @ 11401.0 MHz (-2.8 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Procedure Comments:

Measurements performed in accordance with FCC KDB 789033

Peak measurements performed with: RBW=1MHz, VBW=3MHz, peak detector, max hold, auto sweep time

Unless otherwise stated/noted, emission has duty cycle $\geq 98\%$ and was measured using RBW=1MHz, VBW=10Hz, peak detector, linear average mode, auto sweep time, max hold.

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
11a	6Mbps	0.99	Yes	2.063	0.0	0.0	485
n20	MCS8	0.99	Yes	1.942	0.0	0.0	515
n40	MCS8	0.82	Yes	0.938	0.9	1.8	1066
ac80	VHT0	0.59	Yes	0.256	2.3	4.6	3906

Sample Notes

Sample S/N: 2014-2278

Driver: 6.37 RC 14.54

Pkteng tx 20 1500 0

Antenna: Internal

Measurement Specific Notes:

Note 1:	For emissions outside of the restricted bands the limit is -27dBm/MHz eirp (68.3dBuV/m). The measurement method required is a peak measurement (RB=1MHz, VB \geq 3MHz, peak detector). Per KDB 789033 2) c) (i), compliance can be demonstrated by meeting the average and peak limits of 15.209, as an alternative.
Note 2:	Emission has duty cycle $\geq 98\%$, average measurement performed: RBW=1MHz, VBW=3MHz, RMS, Power averaging, auto sweep, trace average 100 traces
Note 3:	Emission has duty cycle $< 98\%$, but constant, average measurement performed: RBW=1MHz, VBW=10Hz, peak detector, linear averaging, auto sweep, trace average 100 * 1/DC traces, measurement corrected by Linear Voltage correction factor
Note 4:	Emission has duty cycle $< 98\%$ and is NOT constant, average measurement performed: RBW=1MHz, VBW $>$ 1/T, peak detector, linear average mode, sweep time auto, max hold. Max hold for 50*(1/DC) traces
Note 5:	Emission has duty cycle $< 98\%$, but constant, average measurement performed: RBW=1MHz, VBW=3MHz, RMS, Power averaging, auto sweep, trace average 100 * 1/DC traces, measurement corrected by Pwr correction factor
Note 6:	Plots of the average and peak bandedge do not account for any duty cycle correction. Refer to the tabluar results for final measurements.

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Run #3, Radiated Spurious Emissions, 1,000 - 40,000 MHz. Operation in the 5250-5350 MHz Band

Date of Test: 12/19/2014

Test Engineer: Deniz Demirci

Test Location: FT Ch #4

EUT Voltage: 120 VAC/ 60 Hz


Run #3a: Center Channel

Channel: 60 Mode: a
 Tx Chain: 2Tx Data Rate: 6 Mbps



Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15E		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5458.590	53.9	H	54.0	-0.1	AVG	43	1.0	RB 1 MHz;VB 10 Hz;Peak
7066.520	58.2	H	68.3	-10.1	PK	53	1.0	RB 1 MHz;VB 3 MHz;Peak
5458.530	63.8	H	74.0	-10.2	PK	43	1.0	RB 1 MHz;VB 3 MHz;Peak
5741.770	55.3	H	68.3	-13.0	PK	41	1.0	RB 1 MHz;VB 3 MHz;Peak

Note 1: For emissions in restricted bands, the limit of 15.209 was used which requires average and peak measurements.

Note 2: For emissions outside of the restricted bands the limit is -27dBm/MHz eirp (68.3dBuV/m). The measurement method required is a peak measurement (RB=1MHz, VB \geq 3MHz, peak detector).

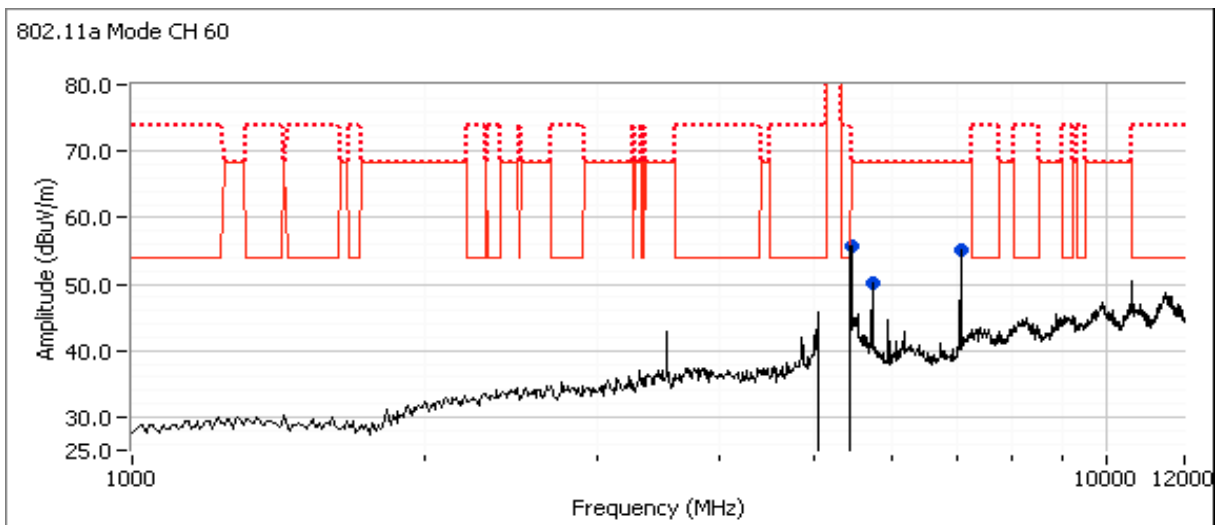

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

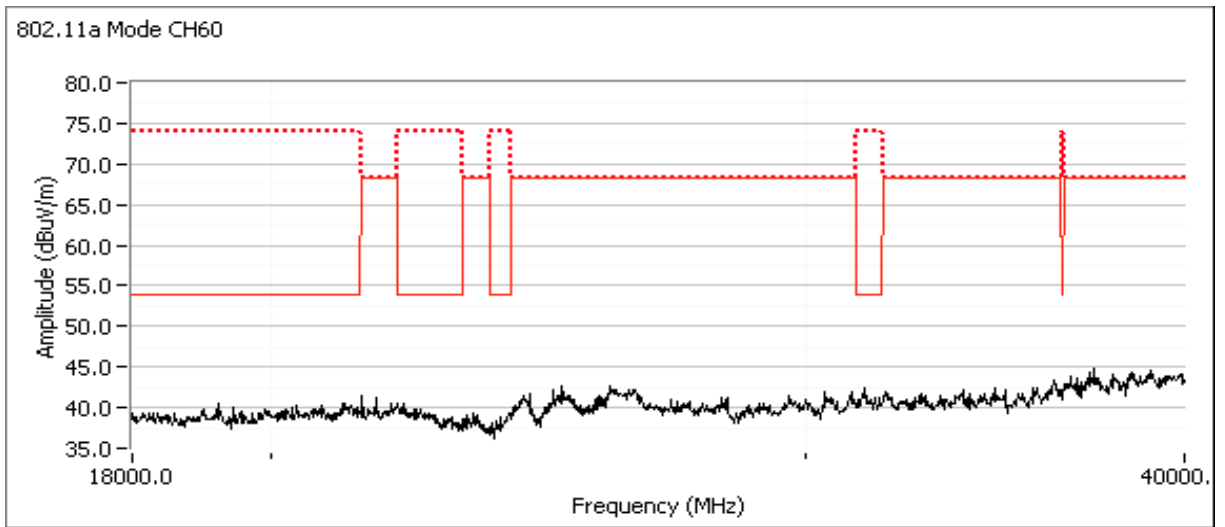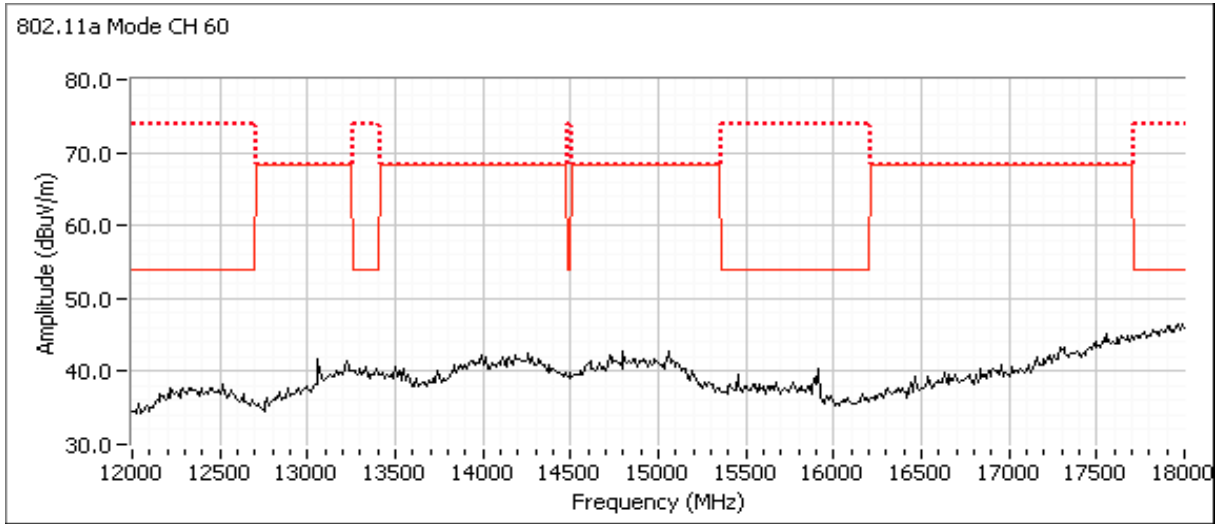



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A


Run #3b: Center Channel

Channel: 60 Mode: 11n20
 Tx Chain: 2Tx Data Rate: MCS8



Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15E		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5458.810	53.2	H	54.0	-0.8	AVG	305	1.0	RB 1 MHz;VB 10 Hz;Peak
5459.990	64.0	H	74.0	-10.0	PK	305	1.0	RB 1 MHz;VB 3 MHz;Peak
5741.490	55.7	H	68.3	-12.6	PK	40	1.0	RB 1 MHz;VB 3 MHz;Peak
7066.660	58.0	H	68.3	-10.3	PK	55	1.0	RB 1 MHz;VB 3 MHz;Peak

Note 1: For emissions in restricted bands, the limit of 15.209 was used which requires average and peak measurements.

Note 2: For emissions outside of the restricted bands the limit is -27dBm/MHz eirp (68.3dBuV/m). The measurement method required is a peak measurement (RB=1MHz, VB \geq 3MHz, peak detector).

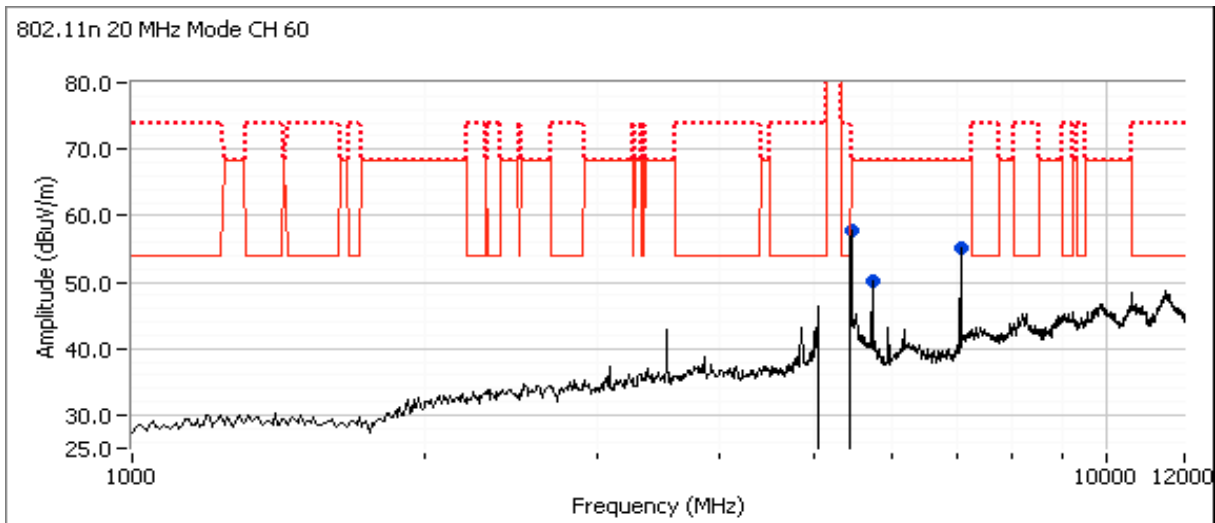

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

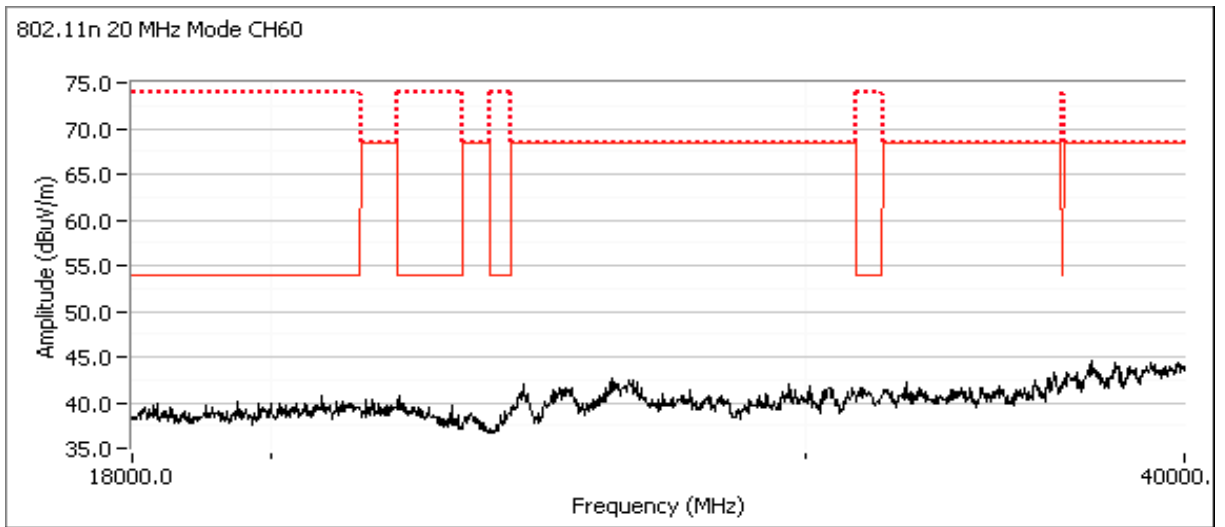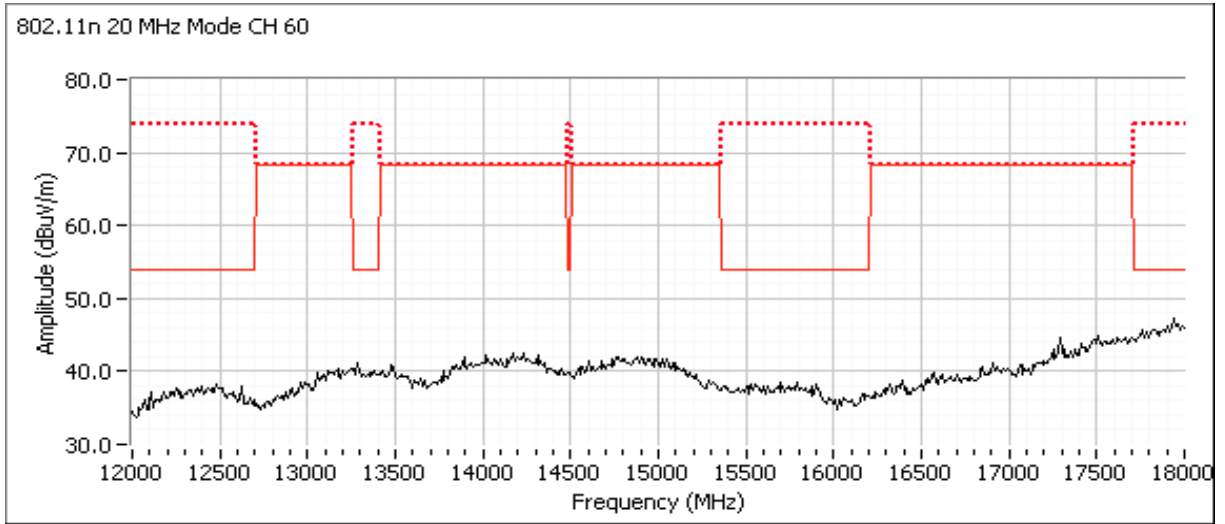



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A


Run #3c: Center Channel

Channel: 54 Mode: 11n40
 Tx Chain: 2Tx Data Rate: MCS8



Frequency	Level	Pol	15.209 / 15E		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
5436.290	51.7	H	54.0	-2.4	AVG	38	1.2	Note3;POS; RB 1 MHz; VB: 10 Hz
7026.660	58.1	H	68.3	-10.2	PK	55	0.9	RB 1 MHz;VB 3 MHz;Peak
5435.540	61.7	H	74.0	-12.3	PK	38	1.2	RB 1 MHz;VB 3 MHz;Peak
6148.180	52.5	H	68.3	-15.8	PK	45	1.1	RB 1 MHz;VB 3 MHz;Peak

Note 1: For emissions in restricted bands, the limit of 15.209 was used which requires average and peak measurements.

Note 2: For emissions outside of the restricted bands the limit is -27dBm/MHz eirp (68.3dB μ V/m). The measurement method required is a peak measurement (RB=1MHz, VB \geq 3MHz, peak detector).

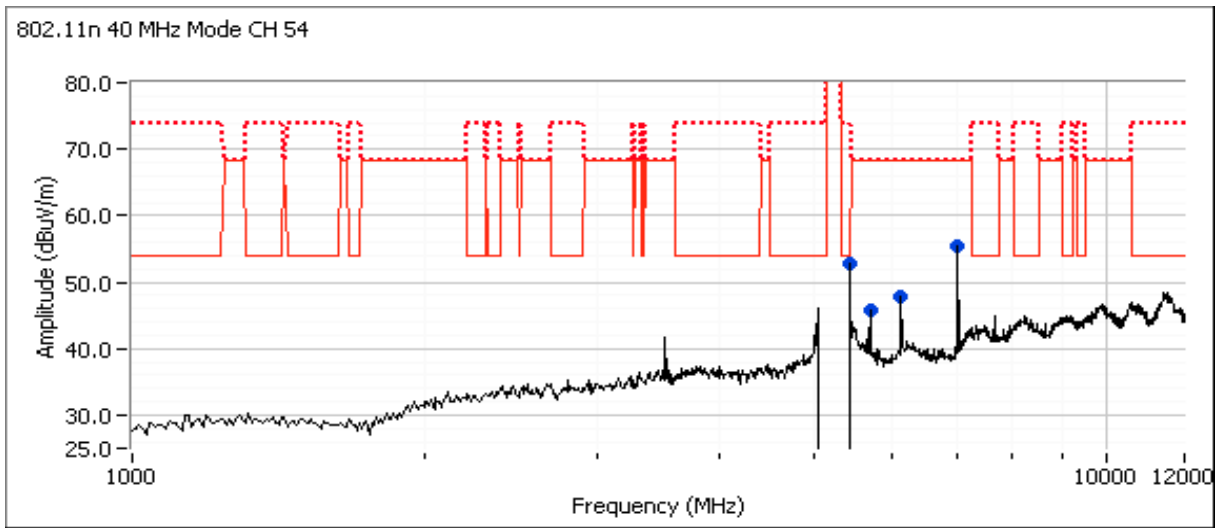

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

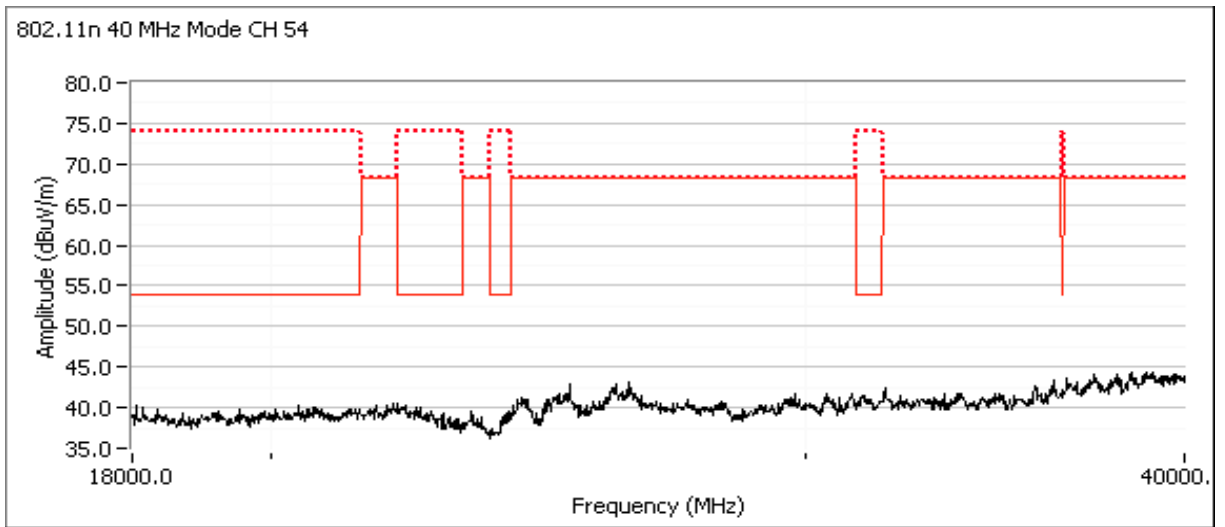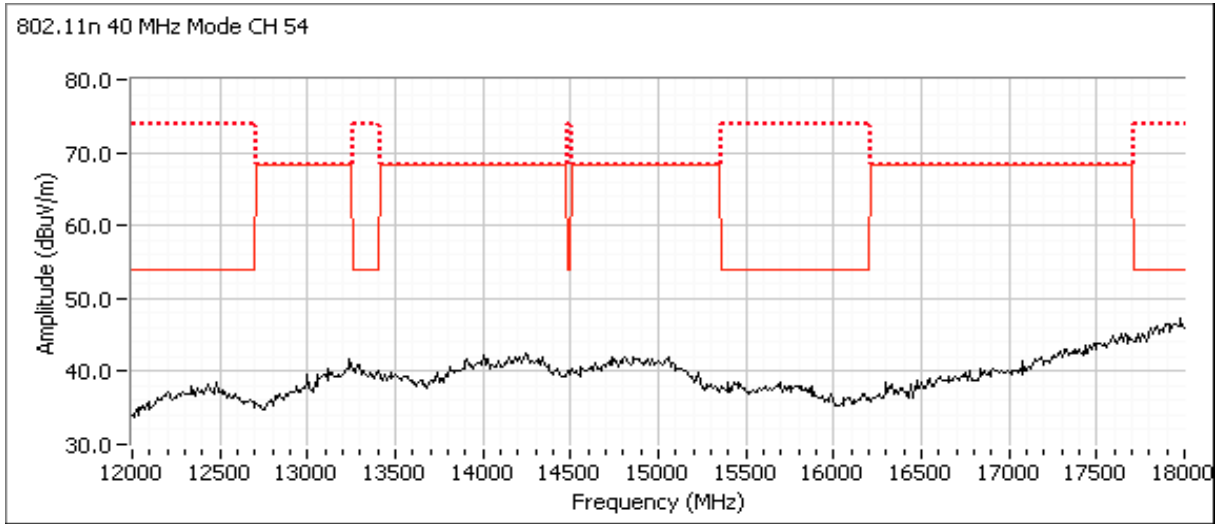



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A


Run #3d: Center Channel

Channel: 58 Mode: ac80
 Tx Chain: 2Tx Data Rate: VHT0



Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15E		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5458.800	52.3	H	54.0	-1.7	AVG	302	1.0	Note3;POS; RB 1 MHz; VB: 10 Hz
5877.850	58.7	H	68.3	-9.6	PK	36	1.0	RB 1 MHz;VB 3 MHz;Peak
7053.290	57.4	H	68.3	-10.9	PK	57	1.0	RB 1 MHz;VB 3 MHz;Peak
5458.610	59.0	H	74.0	-15.0	PK	302	1.0	RB 1 MHz;VB 3 MHz;Peak

Note 1: For emissions in restricted bands, the limit of 15.209 was used which requires average and peak measurements.

Note 2: For emissions outside of the restricted bands the limit is -27dBm/MHz eirp (68.3dBuV/m). The measurement method required is a peak measurement (RB=1MHz, VB \geq 3MHz, peak detector).

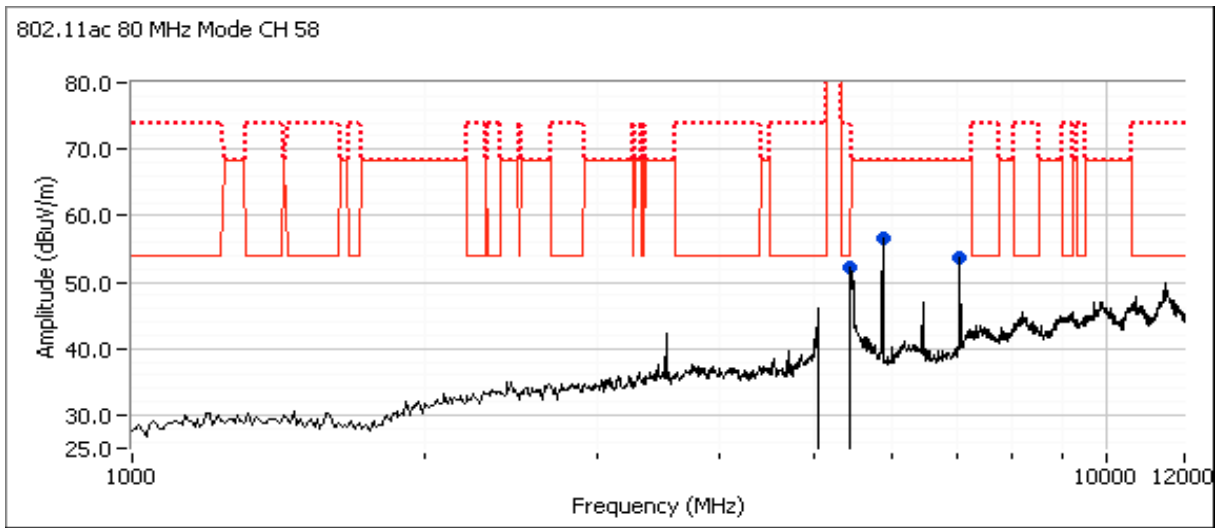

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

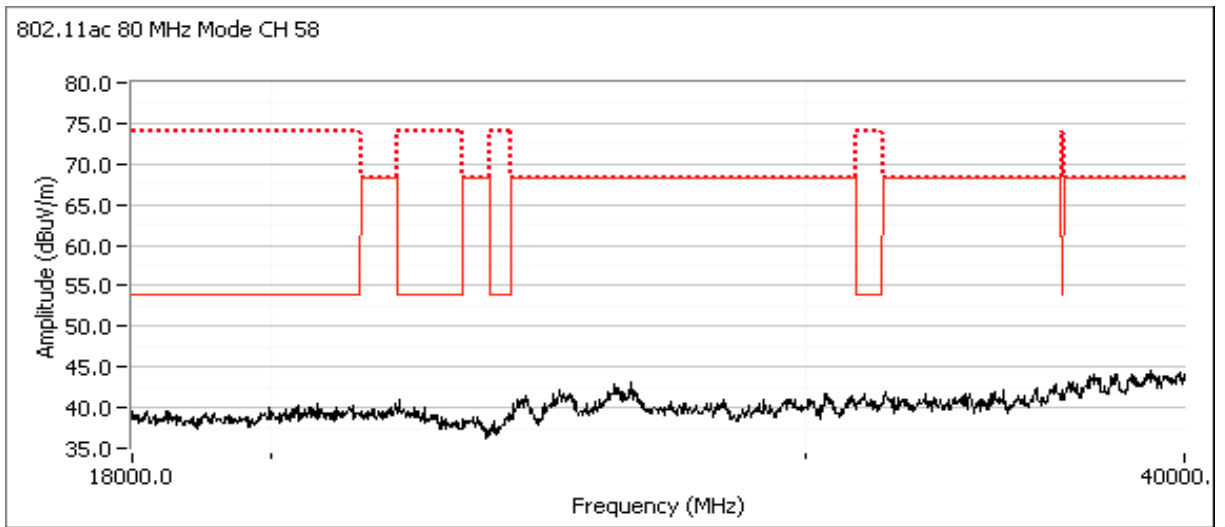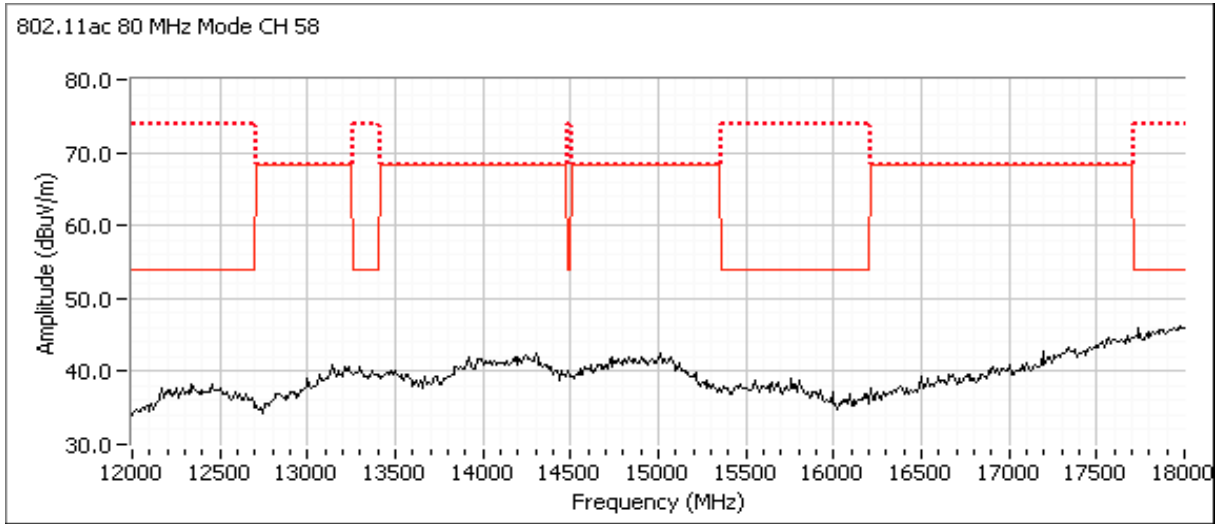

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Run #4: Radiated Spurious Emissions, 1,000 - 40000 MHz. Operating Mode: Worse case from Run #3

Date of Test: 12/19/2014

Test Engineer: Deniz Demirci

Test Location: FT Ch #4

EUT Voltage: 120 VAC/ 60 Hz


Run #4a: Low Channel

Channel: 52 Mode: a
 Tx Chain: 2Tx Data Rate: 6 Mbps



Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
7013.380	57.9	H	68.3	-10.4	PK	57	0.9	RB 1 MHz;VB 3 MHz;Peak
5698.420	55.2	H	68.3	-13.1	PK	43	1.0	RB 1 MHz;VB 3 MHz;Peak
5497.950	53.7	H	68.3	-14.6	PK	43	1.0	RB 1 MHz;VB 3 MHz;Peak

Note 1: For emissions in restricted bands, the limit of 15.209 was used which requires average and peak measurements.

Note 2: For emissions outside of the restricted bands the limit is -27dBm/MHz eirp (68.3dB μ V/m). The measurement method required is a peak measurement (RB=1MHz, VB \geq 3MHz, peak detector).

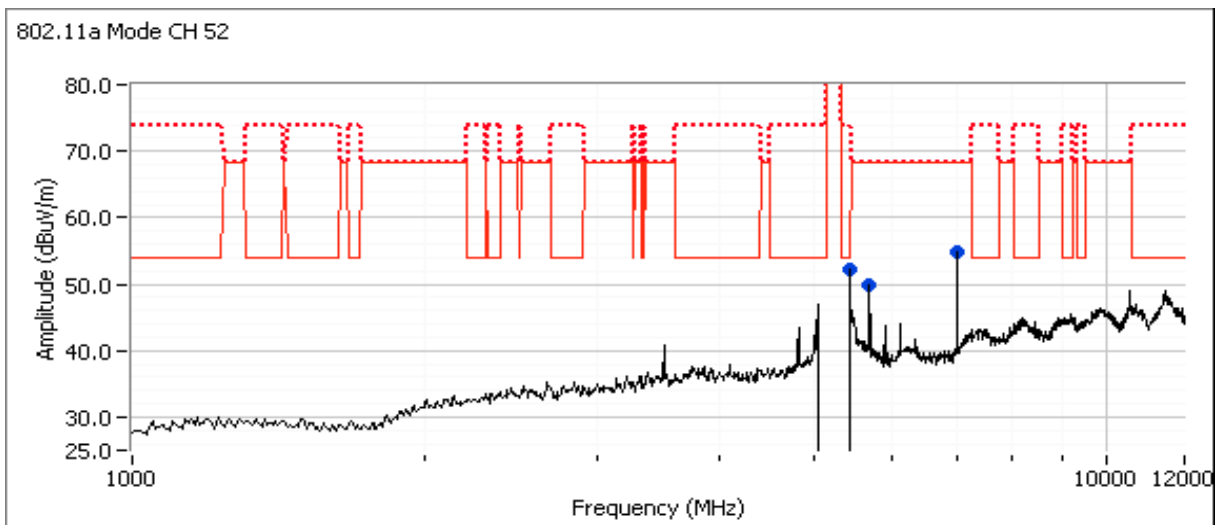

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

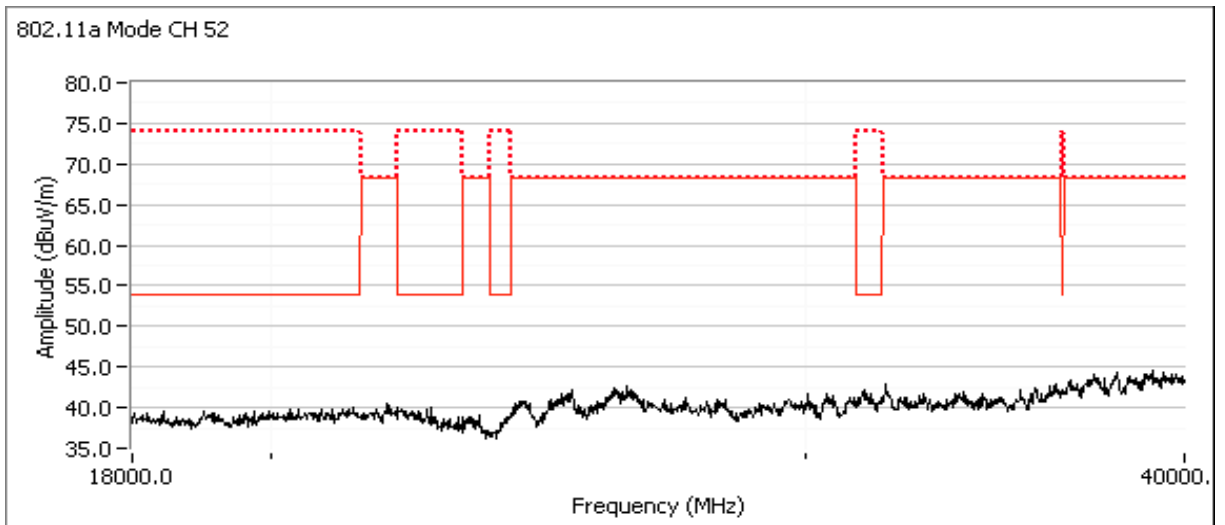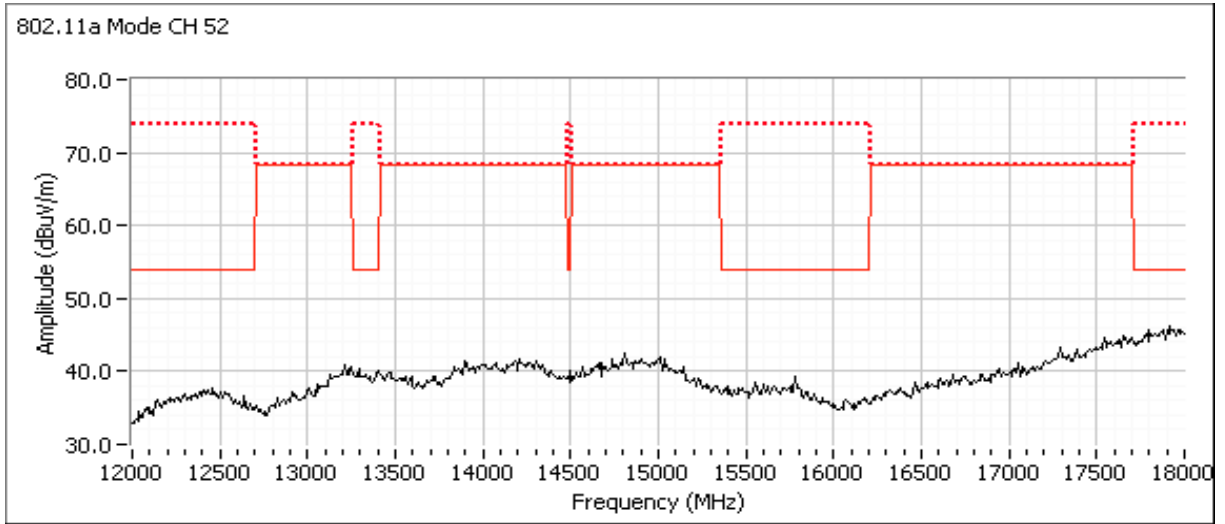



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A


Run #4b: High Channel

Channel: 64 Mode: a
 Tx Chain: 2Tx Data Rate: 6 Mbps



Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
5483.240	63.9	H	68.3	-4.4	PK	304	1.0	RB 1 MHz;VB 3 MHz;Peak
10642.140	46.6	H	54.0	-7.4	AVG	309	1.4	RB 1 MHz;VB 10 Hz;Peak
7093.300	58.3	H	68.3	-10.0	PK	56	1.1	RB 1 MHz;VB 3 MHz;Peak
10642.890	59.5	H	74.0	-14.5	PK	309	1.4	RB 1 MHz;VB 3 MHz;Peak

Note 1: For emissions in restricted bands, the limit of 15.209 was used which requires average and peak measurements.

Note 2: For emissions outside of the restricted bands the limit is -27dBm/MHz eirp (68.3dB μ V/m). The measurement method required is a peak measurement (RB=1MHz, VB \geq 3MHz, peak detector).

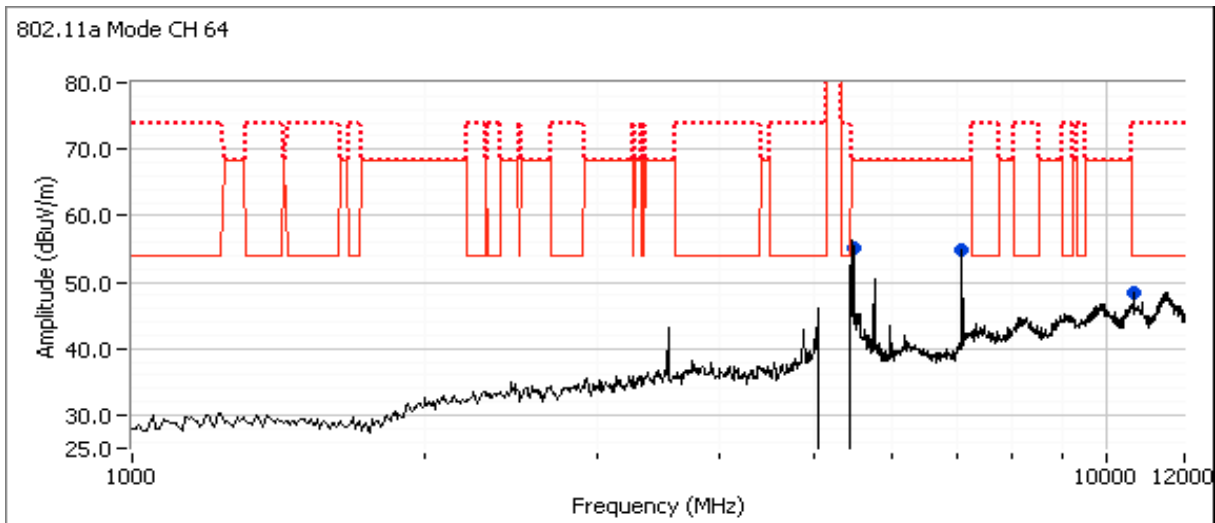

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

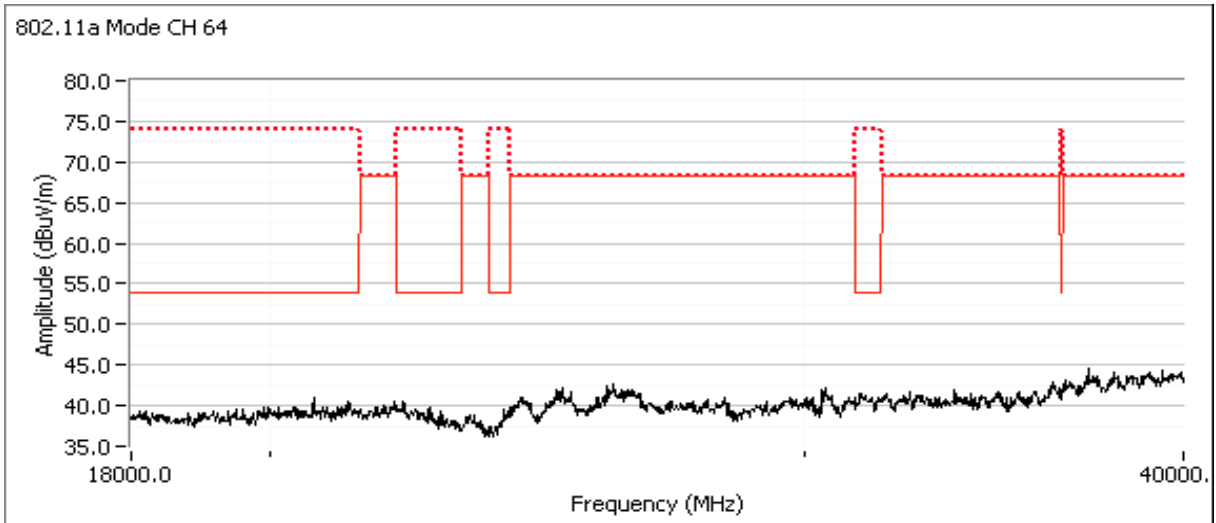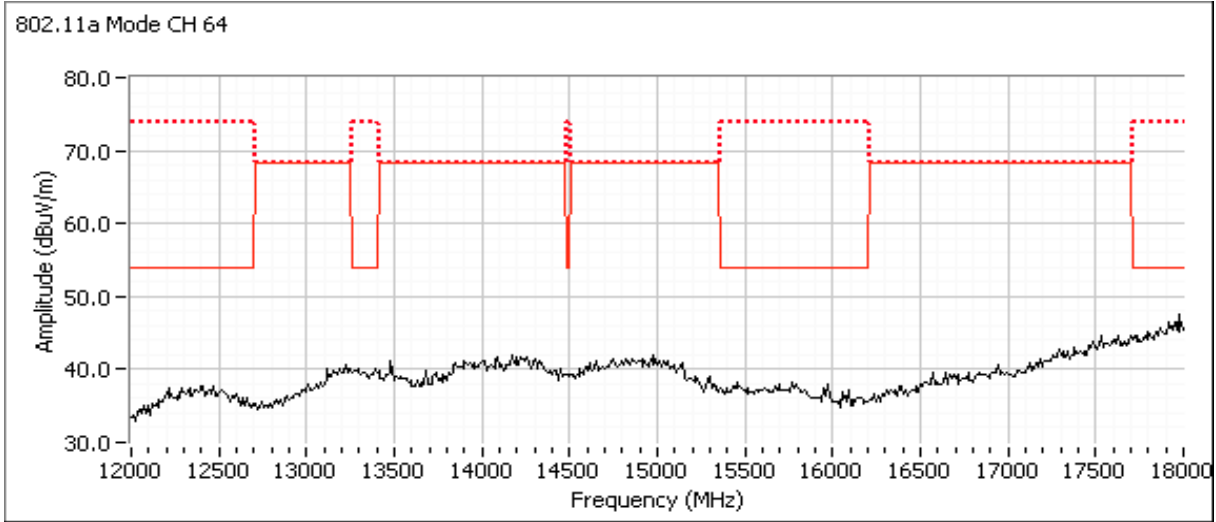

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Run #5, Radiated Spurious Emissions, 1,000 - 40,000 MHz. Operation in the 5470-5725 MHz Band

Date of Test: 12/19/2014

Test Engineer: Deniz Demirci

Test Location: FT Ch #4

EUT Voltage: 120 VAC/ 60 Hz


Run #5a: Center Channel

Channel: 116 Mode: a
 Tx Chain: 2Tx Data Rate: 6 Mbps



Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15E		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
7440.000	49.3	H	54.0	-4.7	AVG	301	1.3	RB 1 MHz;VB 10 Hz;Peak
11161.400	46.2	H	54.0	-7.8	AVG	306	1.8	RB 1 MHz;VB 10 Hz;Peak
5113.030	44.5	H	54.0	-9.5	AVG	46	1.0	RB 1 MHz;VB 10 Hz;Peak
3720.020	44.1	H	54.0	-9.9	AVG	341	1.5	RB 1 MHz;VB 10 Hz;Peak
6042.530	58.1	H	68.3	-10.2	PK	37	1.2	RB 1 MHz;VB 3 MHz;Peak
11160.480	58.6	H	74.0	-15.4	PK	306	1.8	RB 1 MHz;VB 3 MHz;Peak
7440.060	56.1	H	74.0	-17.9	PK	301	1.3	RB 1 MHz;VB 3 MHz;Peak
5112.970	54.4	H	74.0	-19.6	PK	46	1.0	RB 1 MHz;VB 3 MHz;Peak
3720.050	49.8	H	74.0	-24.2	PK	341	1.5	RB 1 MHz;VB 3 MHz;Peak

Note 1: For emissions in restricted bands, the limit of 15.209 was used which requires average and peak measurements.

Note 2: For emissions outside of the restricted bands the limit is -27dBm/MHz eirp (68.3dBuV/m). The measurement method required is a peak measurement (RB=1MHz, VB \geq 3MHz, peak detector).

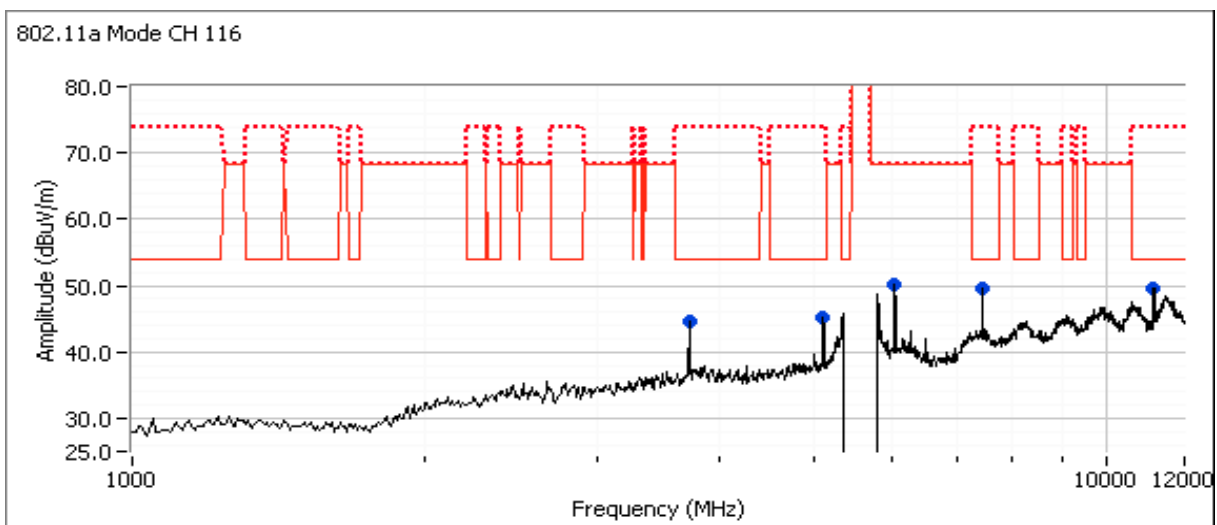

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

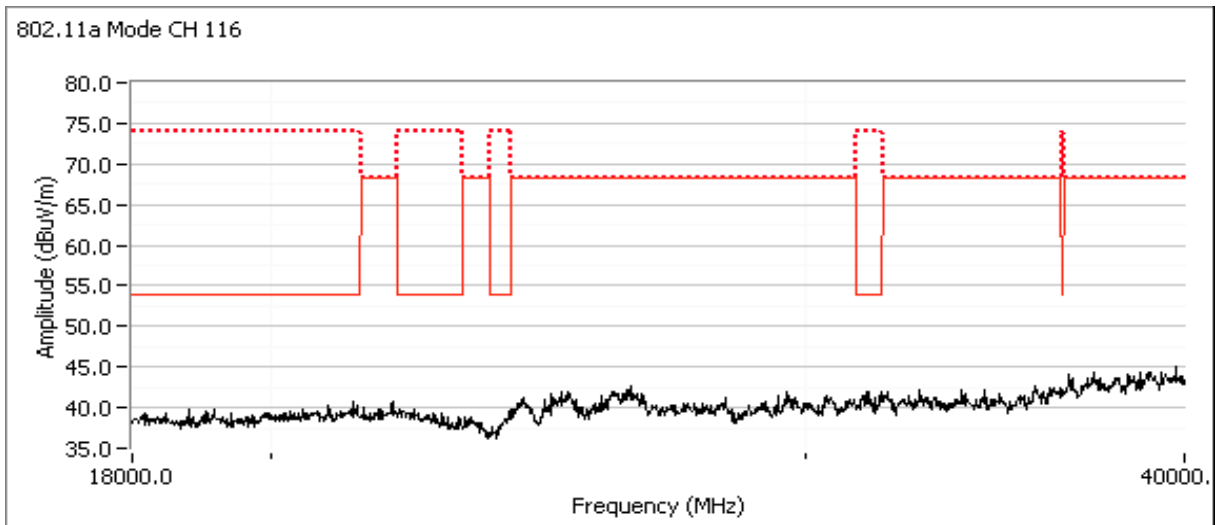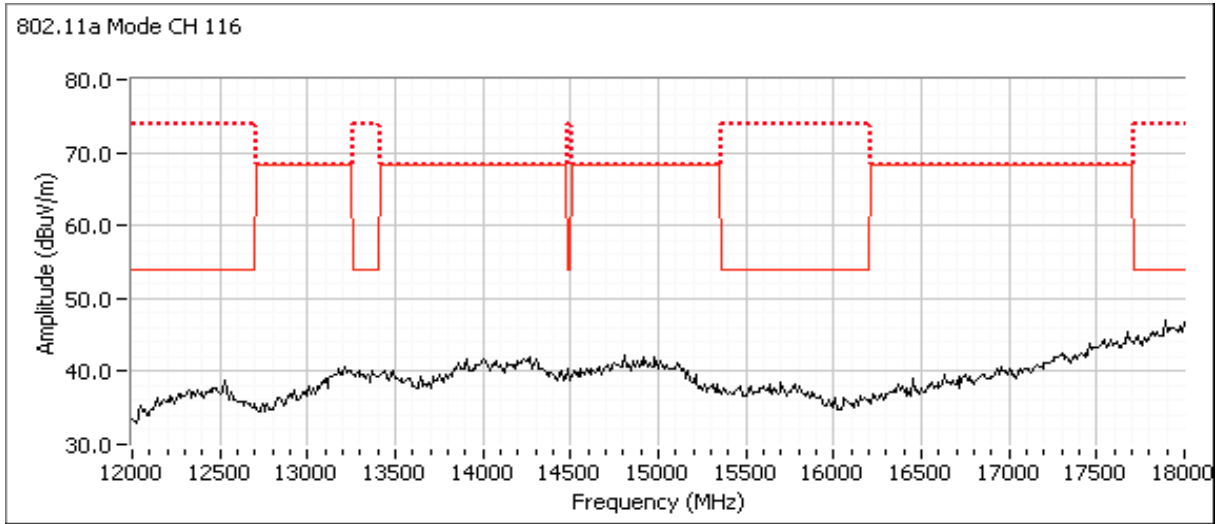



EMC Test Data


Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Run #5b: Center Channel



Channel: 116 Mode: 11n20
 Tx Chain: 2Tx Data Rate: MCS8

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15E		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
7439.940	48.1	H	54.0	-5.9	AVG	309	1.4	RB 1 MHz;VB 10 Hz;Peak
11161.000	44.7	H	54.0	-9.3	AVG	309	1.7	RB 1 MHz;VB 10 Hz;Peak
3719.990	43.6	H	54.0	-10.4	AVG	340	1.3	RB 1 MHz;VB 10 Hz;Peak
6042.730	57.6	H	68.3	-10.7	PK	40	1.3	RB 1 MHz;VB 3 MHz;Peak
5116.200	40.7	V	54.0	-13.3	AVG	13	2.5	RB 1 MHz;VB 10 Hz;Peak
11156.330	58.0	H	74.0	-16.0	PK	309	1.7	RB 1 MHz;VB 3 MHz;Peak
7439.830	55.5	H	74.0	-18.5	PK	309	1.4	RB 1 MHz;VB 3 MHz;Peak
5114.370	52.4	V	74.0	-21.6	PK	13	2.5	RB 1 MHz;VB 3 MHz;Peak
6043.970	46.2	H	68.3	-22.1	AVG	40	1.3	RB 1 MHz;VB 10 Hz;Peak
3719.860	49.3	H	74.0	-24.7	PK	340	1.3	RB 1 MHz;VB 3 MHz;Peak

- Note 1: For emissions in restricted bands, the limit of 15.209 was used which requires average and peak measurements.
- Note 2: For emissions outside of the restricted bands the limit is -27dBm/MHz eirp (68.3dB μ V/m). The measurement method required is a peak measurement (RB=1MHz, VB \geq 3MHz, peak detector).

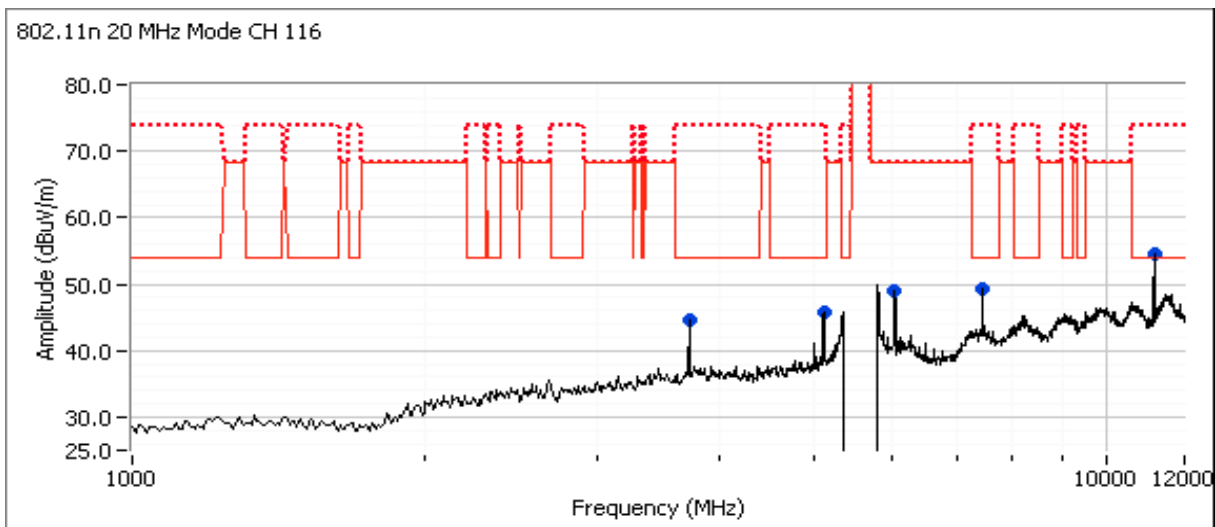

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

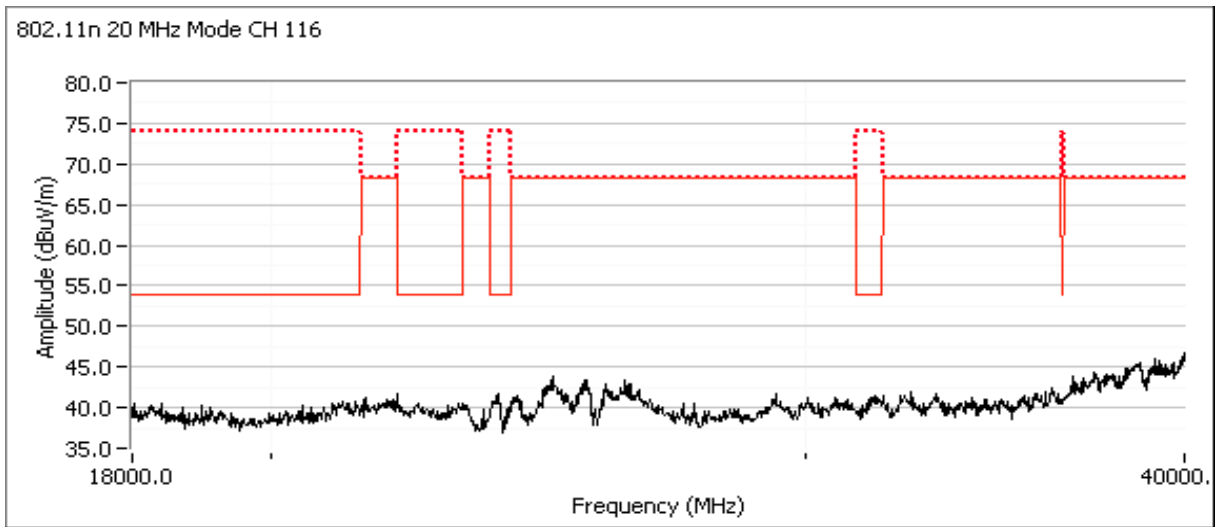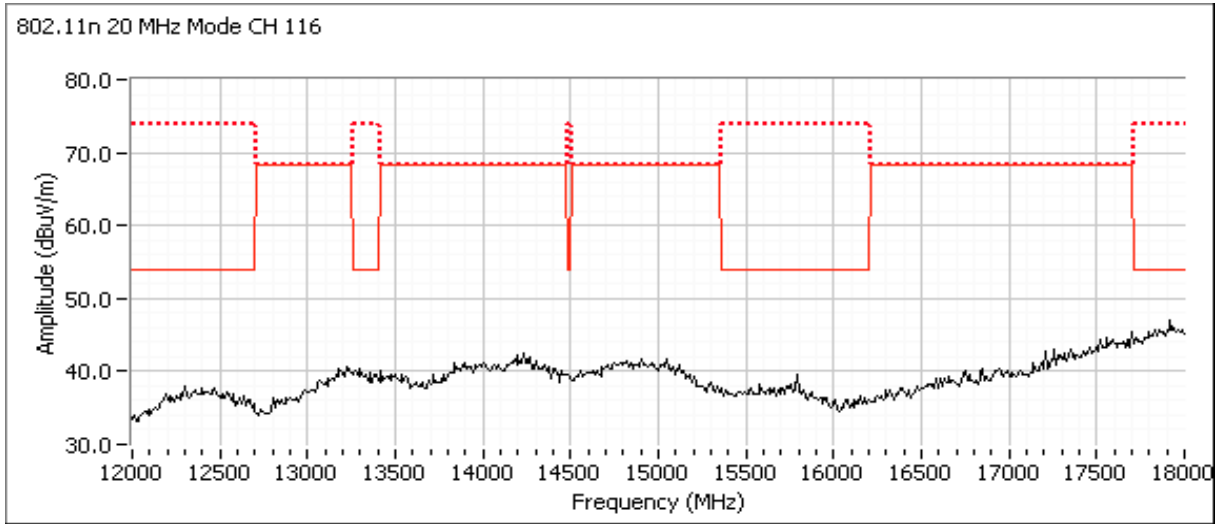

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A


Run #5c: Center Channel

Channel: 110 Mode: 11n40
 Tx Chain: 2Tx Data Rate: MCS8



Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15E		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
7399.980	50.0	H	54.0	-4.1	AVG	299	1.7	Note3;POS; RB 1 MHz; VB: 10 Hz
3699.990	45.4	H	54.0	-8.7	AVG	343	1.1	Note3;POS; RB 1 MHz; VB: 10 Hz
11101.120	44.7	H	54.0	-9.4	AVG	305	1.7	Note3;POS; RB 1 MHz; VB: 10 Hz
11101.180	55.7	H	74.0	-18.3	PK	305	1.7	RB 1 MHz;VB 3 MHz;Peak
7400.120	55.4	H	74.0	-18.6	PK	299	1.7	RB 1 MHz;VB 3 MHz;Peak
3700.010	49.1	H	74.0	-24.9	PK	343	1.1	RB 1 MHz;VB 3 MHz;Peak

Note 1: For emissions in restricted bands, the limit of 15.209 was used which requires average and peak measurements.

Note 2: For emissions outside of the restricted bands the limit is -27dBm/MHz eirp (68.3dBuV/m). The measurement method required is a peak measurement (RB=1MHz, VB \geq 3MHz, peak detector).

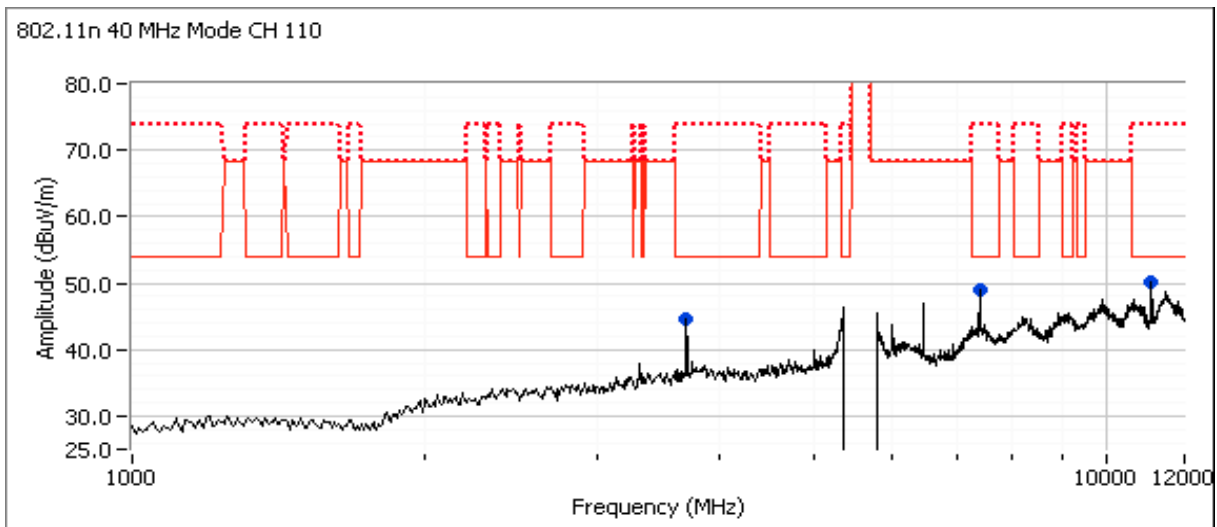

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

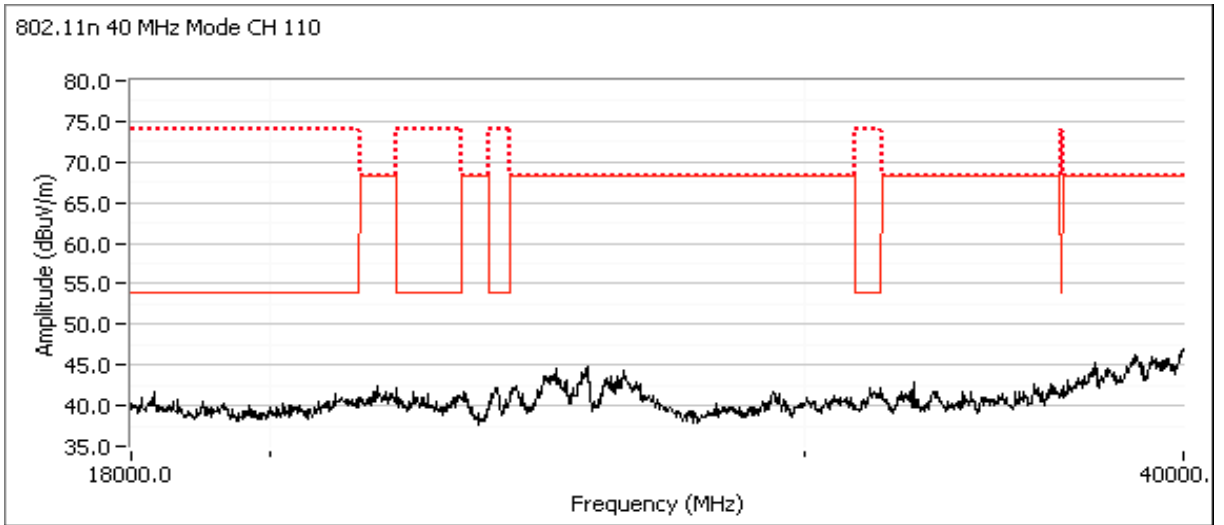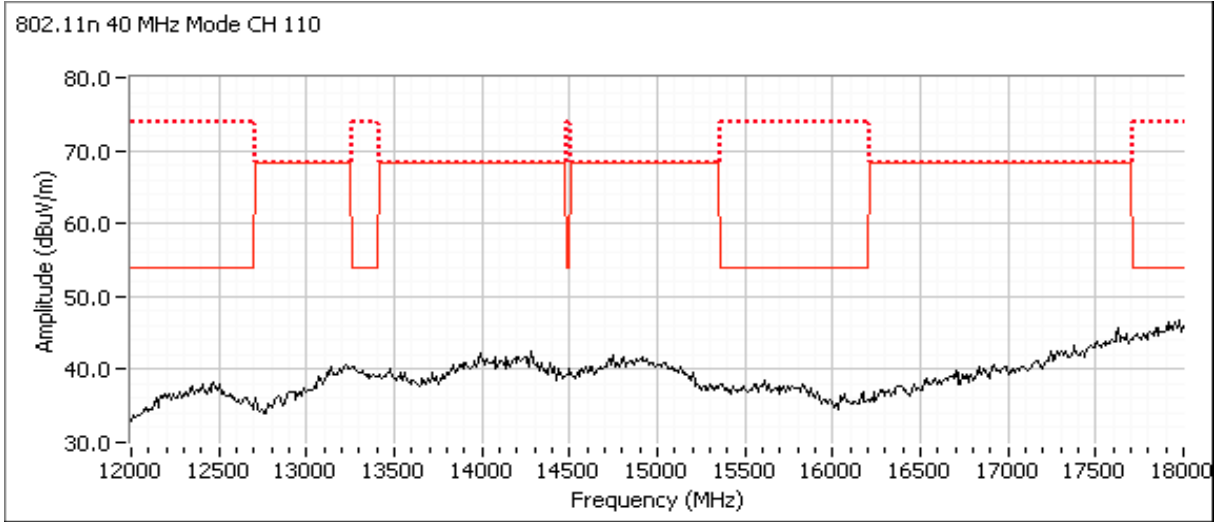



EMC Test Data


Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Run #5d: Center Channel



Channel: 106 Mode: ac80
 Tx Chain: 2Tx Data Rate: VHT0

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15E		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
7373.330	53.7	H	54.0	-0.3	AVG	298	1.0	Note3;POS; RB 1 MHz; VB: 10 Hz
3686.650	48.2	H	54.0	-5.8	AVG	338	1.5	Note3;POS; RB 1 MHz; VB: 10 Hz
6144.480	61.1	H	68.3	-7.2	PK	315	1.3	RB 1 MHz;VB 3 MHz;Peak
11081.000	46.3	H	54.0	-7.7	AVG	303	1.3	Note3;POS; RB 1 MHz; VB: 10 Hz
4915.550	45.2	H	54.0	-8.8	AVG	303	1.2	Note3;POS; RB 1 MHz; VB: 10 Hz
7373.310	57.6	H	74.0	-16.4	PK	298	1.0	RB 1 MHz;VB 3 MHz;Peak
11089.630	54.9	H	74.0	-19.1	PK	303	1.3	RB 1 MHz;VB 3 MHz;Peak
4915.840	49.1	H	74.0	-24.9	PK	303	1.2	RB 1 MHz;VB 3 MHz;Peak
3686.440	48.9	H	74.0	-25.1	PK	338	1.5	RB 1 MHz;VB 3 MHz;Peak

- Note 1: For emissions in restricted bands, the limit of 15.209 was used which requires average and peak measurements.
- Note 2: For emissions outside of the restricted bands the limit is -27dBm/MHz eirp (68.3dB μ V/m). The measurement method required is a peak measurement (RB=1MHz, VB \geq 3MHz, peak detector).

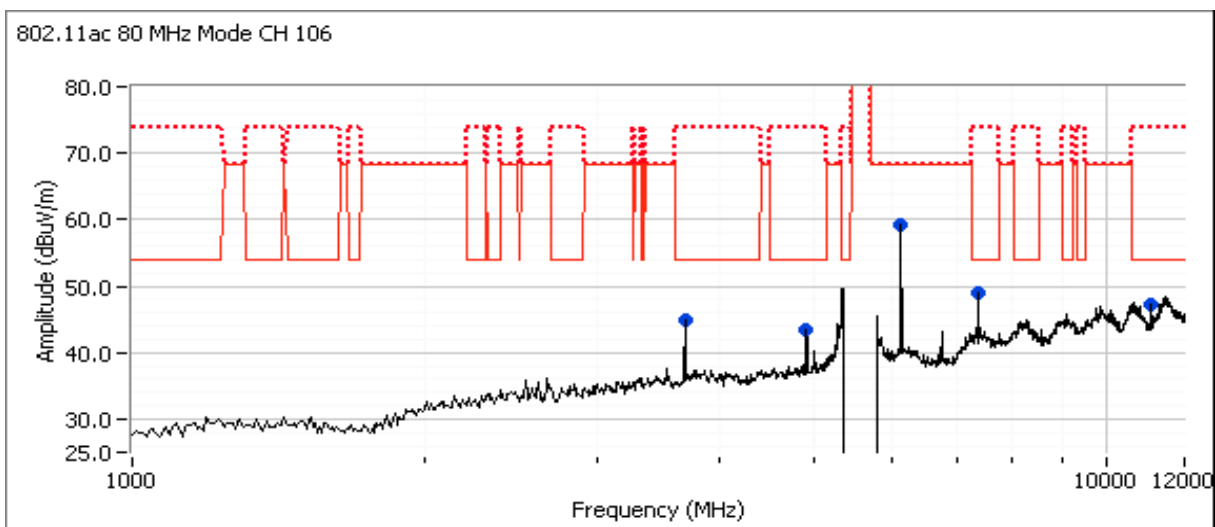

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

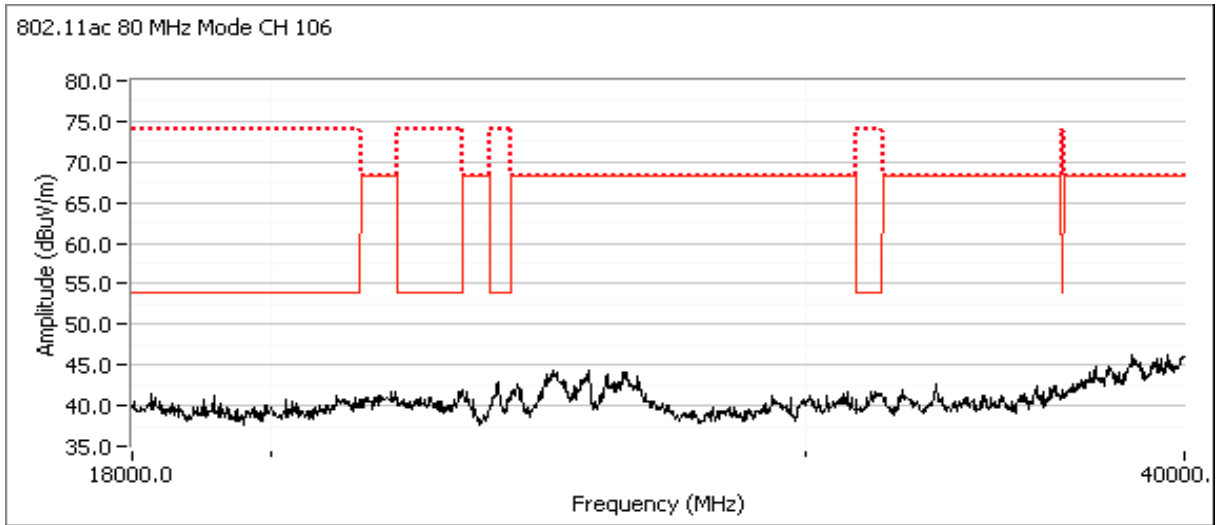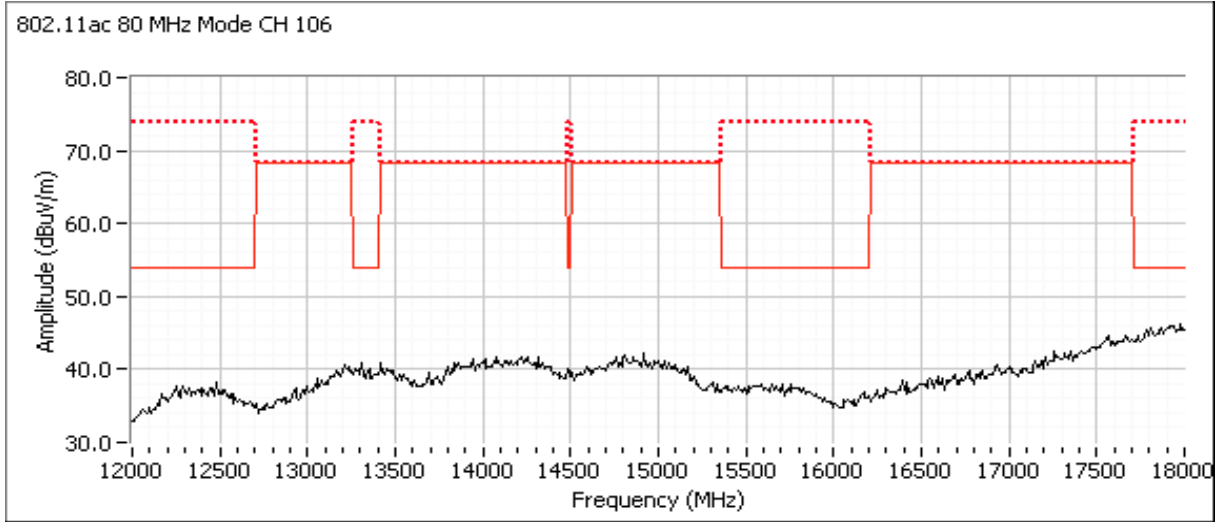



EMC Test Data


Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

Run #6: Radiated Spurious Emissions, 1,000 - 40000 MHz. Operating Mode: Worse case from Run #5
 Date of Test: 12/22/2014 Config. Used: 1
 Test Engineer: Deniz Demirci Config Change: None
 Test Location: FT Ch #4 EUT Voltage: 120 VAC / 60 Hz



Run #6a: High Channel

Channel: 138 Mode: AC80
 Tx Chain: 2Tx Data Rate: MCS8

Frequency MHz	Level dB μ V/m	Pol v/h	15.209 / 15.247		Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
			Limit	Margin				
11401.040	51.2	H	54.0	-2.8	AVG	52	1.6	Note3;POS; RB 1 MHz; VB: 10 Hz
5057.750	45.7	H	54.0	-8.3	AVG	302	1.1	Note3;POS; RB 1 MHz; VB: 10 Hz
3793.330	45.1	H	54.0	-8.9	AVG	332	1.3	Note3;POS; RB 1 MHz; VB: 10 Hz
7586.660	44.7	H	54.0	-9.3	AVG	298	1.3	Note3;POS; RB 1 MHz; VB: 10 Hz
6322.290	54.8	H	68.3	-13.5	PK	314	1.0	RB 1 MHz;VB 3 MHz;Peak
11396.620	60.1	H	74.0	-13.9	PK	52	1.6	RB 1 MHz;VB 3 MHz;Peak
7586.620	54.4	H	74.0	-19.6	PK	298	1.3	RB 1 MHz;VB 3 MHz;Peak
5057.670	51.1	H	74.0	-22.9	PK	302	1.1	RB 1 MHz;VB 3 MHz;Peak
3793.180	49.9	H	74.0	-24.1	PK	332	1.3	RB 1 MHz;VB 3 MHz;Peak

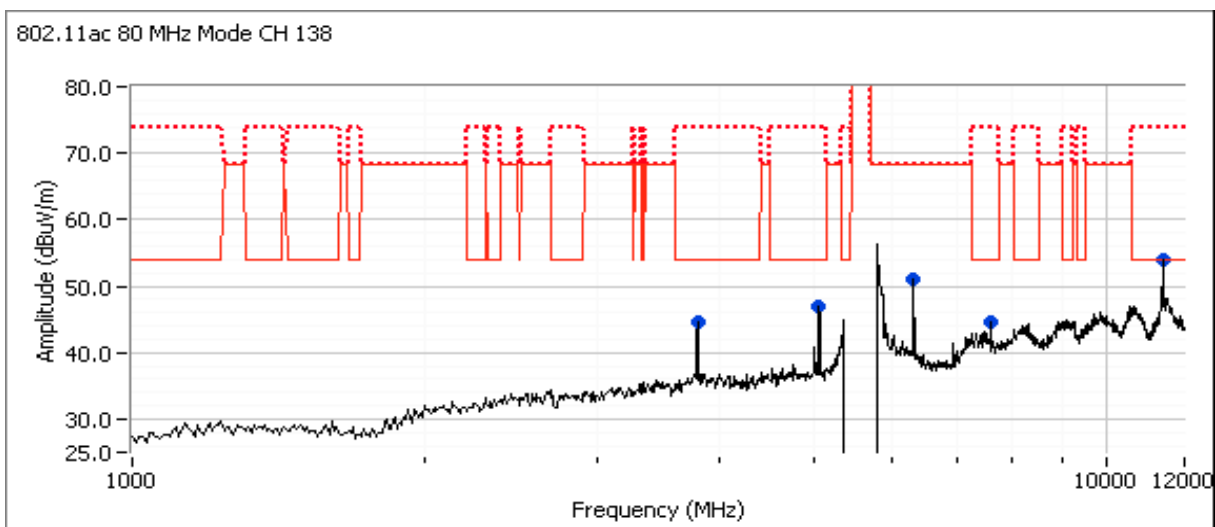

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96923
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: N/A

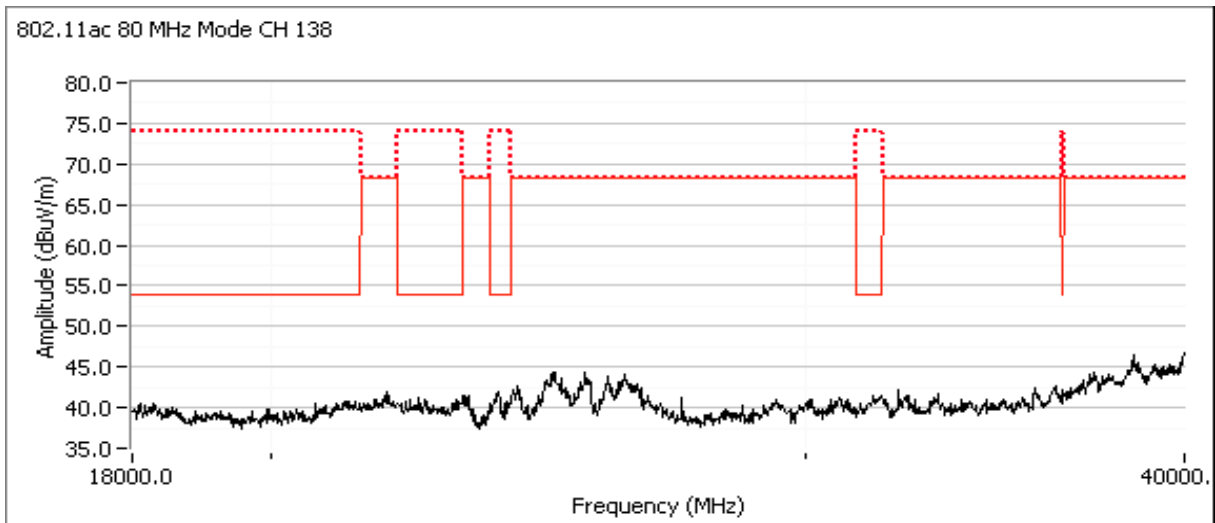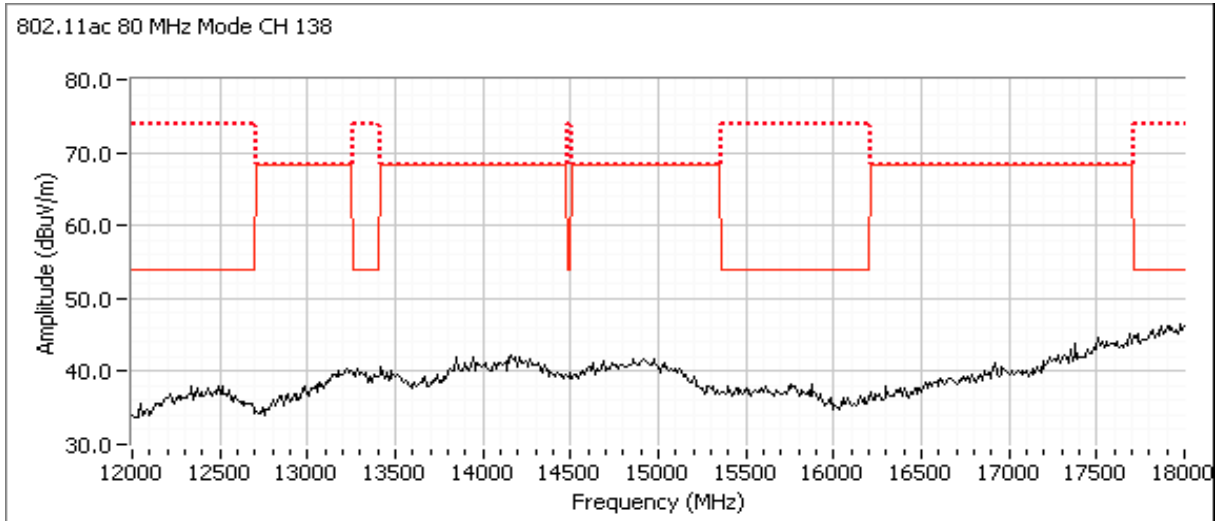



EMC Test Data

Client:	Aruba Networks	Job Number:	J96879
Product	APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless	T-Log Number:	T96924
	Access Points	Project Manager:	Christine Krebill
Contact:	Tian Mendez	Project Coordinator:	
Emissions Standard(s):	FCC 15.247/FCC 15.407/RSS-210/LP0002	Class:	-
Immunity Standard(s):	-	Environment:	-

EMC Test Data

For The

Aruba Networks

Product

APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points

Date of Last Test: 12/30/2014



EMC Test Data

Client:	Aruba Networks	Job Number:	J96879
Model:	APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number:	T96924
		Project Manager:	Christine Krebill
Contact:	Tian Mendez	Project Coordinator:	-
Standard:	FCC 15.247/FCC 15.407/RSS-210/LP0002	Class:	-

Conducted Emissions

(NTS Silicon Valley, Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 1/6/2015	Config. Used: 1
Test Engineer: John Caizzi	Config Change: none
Test Location: Fremont Chamber #3	EUT Voltage: 120V/60Hz

General Test Configuration

For tabletop equipment, the EUT was located on a wooden table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN. Remote support equipment was located outside of the semi-anechoic chamber. Any cables running to remote support equipment where routed through metal conduit and passed through a ferrite clamp upon exiting the chamber.

Ambient Conditions:	Temperature:	19 °C
	Rel. Humidity:	32 %

Summary of Results

Run #	Test Performed	Limit	Result	Margin
2	CE, AC Power, 120V/60Hz	Class B	Pass	40.0 dBµV @ 0.455 MHz (-6.8 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard



No deviations were made from the requirements of the standard.

Notes

EUT operating in continuous transmit mode. CH149, 11a, 6Mb/s, power setting q72

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: -

Run #2: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

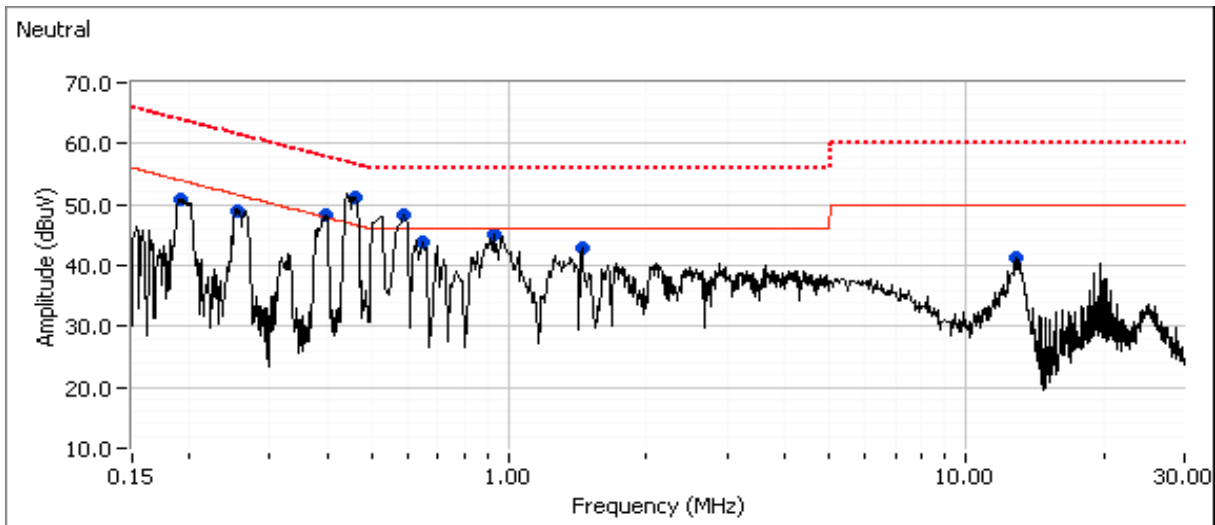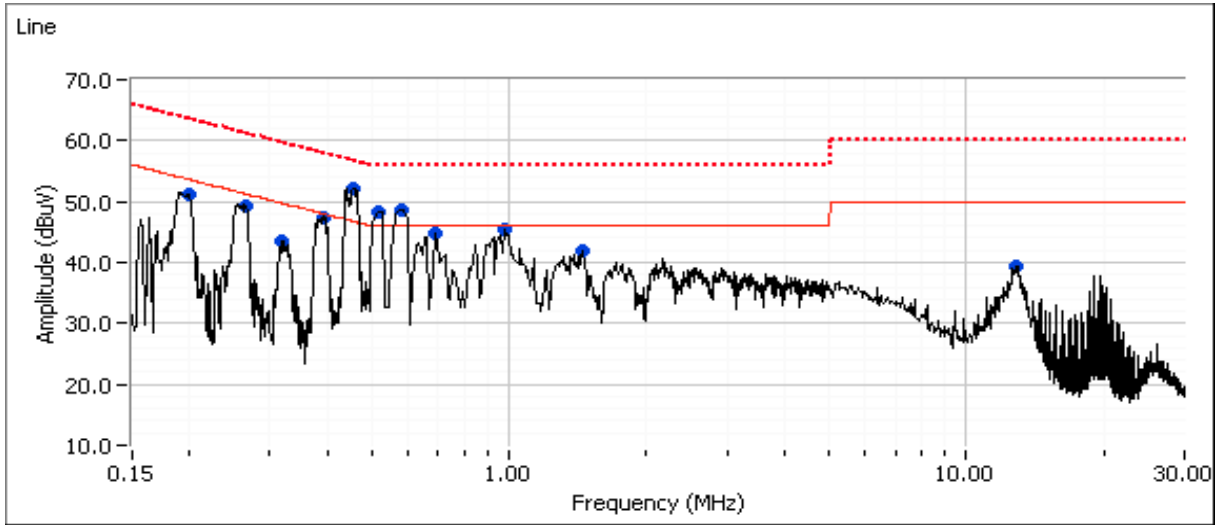



EMC Test Data

Client:	Aruba Networks	Job Number:	J96879
Model:	APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number:	T96924
Contact:	Tian Mendez	Project Manager:	Christine Krebill
Standard:	FCC 15.247/FCC 15.407/RSS-210/LP0002	Project Coordinator:	-
		Class:	-

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.455	52.0	Line	46.8	5.2	Peak	
0.584	48.5	Line	46.0	2.5	Peak	
0.522	48.4	Line	46.0	2.4	Peak	
0.921	45.3	Line	46.0	-0.7	Peak	
0.390	47.2	Line	48.0	-0.8	Peak	
0.660	44.9	Line	46.0	-1.1	Peak	
0.266	49.4	Line	51.3	-1.9	Peak	
0.196	51.2	Line	53.6	-2.4	Peak	
1.450	41.9	Line	46.0	-4.1	Peak	
0.320	43.4	Line	49.7	-6.3	Peak	
12.947	39.3	Line	50.0	-10.7	Peak	
0.456	51.2	Neutral	46.7	4.5	Peak	
0.583	48.3	Neutral	46.0	2.3	Peak	
0.395	48.4	Neutral	47.9	0.5	Peak	
0.920	45.2	Neutral	46.0	-0.8	Peak	
0.659	43.8	Neutral	46.0	-2.2	Peak	
0.260	49.0	Neutral	51.6	-2.6	Peak	
1.449	42.8	Neutral	46.0	-3.2	Peak	
0.194	50.8	Neutral	54.0	-3.2	Peak	
13.007	41.4	Neutral	50.0	-8.6	Peak	



EMC Test Data

Client: Aruba Networks	Job Number: J96879
Model: APINH205-2x2:2 MIMO 802.11a/b/g/n/ac Wireless Access Points	T-Log Number: T96924
	Project Manager: Christine Krebill
Contact: Tian Mendez	Project Coordinator: -
Standard: FCC 15.247/FCC 15.407/RSS-210/LP0002	Class: -

Final quasi-peak and average readings

Frequency MHz	Level dB μ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.455	40.0	Line	46.8	-6.8	AVG	
0.455	50.0	Line	56.8	-6.8	QP	
0.584	35.1	Line	46.0	-10.9	AVG	
0.584	46.3	Line	56.0	-9.7	QP	
0.522	35.8	Line	46.0	-10.2	AVG	
0.522	47.1	Line	56.0	-8.9	QP	
0.921	29.2	Line	46.0	-16.8	AVG	
0.921	42.8	Line	56.0	-13.2	QP	
0.390	35.9	Line	48.1	-12.2	AVG	
0.390	45.3	Line	58.1	-12.8	QP	
0.660	28.2	Line	46.0	-17.8	AVG	
0.660	42.1	Line	56.0	-13.9	QP	
0.266	31.8	Line	51.2	-19.4	AVG	
0.266	44.1	Line	61.2	-17.1	QP	
0.196	35.9	Line	53.8	-17.9	AVG	
0.196	48.4	Line	63.8	-15.4	QP	
1.450	32.0	Line	46.0	-14.0	AVG	
1.450	39.5	Line	56.0	-16.5	QP	
0.320	30.5	Line	49.7	-19.2	AVG	
0.320	39.3	Line	59.7	-20.4	QP	
12.947	29.5	Line	50.0	-20.5	AVG	
12.947	35.6	Line	60.0	-24.4	QP	
0.456	39.2	Neutral	46.8	-7.6	AVG	
0.456	49.4	Neutral	56.8	-7.4	QP	
0.583	34.4	Neutral	46.0	-11.6	AVG	
0.583	45.9	Neutral	56.0	-10.1	QP	
0.395	34.1	Neutral	48.0	-13.9	AVG	
0.395	45.6	Neutral	58.0	-12.4	QP	
0.920	29.2	Neutral	46.0	-16.8	AVG	
0.920	42.6	Neutral	56.0	-13.4	QP	
0.659	28.6	Neutral	46.0	-17.4	AVG	
0.659	42.0	Neutral	56.0	-14.0	QP	
0.260	38.2	Neutral	51.4	-13.2	AVG	
0.260	46.3	Neutral	61.4	-15.1	QP	
1.449	32.1	Neutral	46.0	-13.9	AVG	
1.449	39.4	Neutral	56.0	-16.6	QP	
0.194	36.9	Neutral	53.9	-17.0	AVG	
0.194	48.1	Neutral	63.9	-15.8	QP	
13.007	30.7	Neutral	50.0	-19.3	AVG	
13.007	36.7	Neutral	60.0	-23.3	QP	

End of Report

This page is intentionally blank and marks the last page of this test report.