



RF MEASUREMENT REPORT

FCC ID: Q9DAPINH605
Applicant: Hewlett Packard Enterprise
Product: ACCESS POINT
Model No.: APINH605
Trademark:  , 
FCC Classification: Unlicensed National Information Infrastructure (NII)
FCC Rule Part(s): Part 15 Subpart E (Section 15.407)
Result: Complies
Received Date: 2023-06-25
Test Date: 2023-07-10 ~ 2023-11-29

Reviewed By:

Jame Yuan

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB789033 and KDB 291074. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2306RSU039-U5	V01	Initial Report	2023-10-11	Invalid
2306RSU039-U5	V02	Revised test data	2023-11-29	Invalid
2306RSU039-U5	V03	Update antenna table	2023-12-05	Valid

CONTENTS

Description	Page
1. General Information	6
1.1. Applicant	6
1.2. Manufacturer	6
1.3. Testing Facility	6
1.4. Product Information.....	7
1.5. Radio Specification under Test	7
1.6. Working Frequencies	8
1.7. Antenna Details.....	8
1.8. Description of Operating Paths.....	9
2. Test Configuration	10
2.1. Test Mode.....	10
2.2. Test System Connection Diagram	11
2.3. Test Software	11
2.4. Applied Standards.....	12
2.5. Test Environment Condition	12
3. Antenna Requirements	13
4. Measuring Instrument	14
5. Decision Rules and Measurement Uncertainty	16
5.1. Decision Rules	16
5.2. Measurement Uncertainty	16
6. Test Result.....	18
6.1. Summary.....	18
6.2. 26dB & 99% Bandwidth Measurement.....	19
6.2.1. Test Limit.....	19
6.2.2. Test Procedure.....	19
6.2.3. Test Setting	19
6.2.4. Test Setup	19
6.2.5. Test Result	20
6.3. 6dB Bandwidth Measurement.....	21
6.3.1. Test Limit.....	21
6.3.2. Test Procedure.....	21
6.3.3. Test Setting	21
6.3.4. Test Setup	21
6.3.5. Test Result	21
6.4. Output Power Measurement.....	22

6.4.1.	Test Limit	22
6.4.2.	Test Procedure	22
6.4.3.	Test Setting	22
6.4.4.	Test Setup	22
6.4.5.	Test Result	22
6.5.	Power Spectral Density Measurement	23
6.5.1.	Test Limit	23
6.5.2.	Test Procedure	23
6.5.3.	Test Setting	23
6.5.4.	Test Setup	23
6.5.5.	Test Result	23
6.6.	Frequency Stability Measurement	24
6.6.1.	Test Limit	24
6.6.2.	Test Procedure	24
6.6.3.	Test Setup	24
6.6.4.	Test Result	25
6.7.	Radiated Spurious Emission Measurement.....	26
6.7.1.	Test Limit	26
6.7.2.	Test Procedure	26
6.7.3.	Test Setting	27
6.7.4.	Test Setup	29
6.7.5.	Test Result	30
6.8.	Radiated Restricted Band Edge Measurement	31
6.8.1.	Test Limit	31
6.8.2.	Test Procedure	33
6.8.3.	Test Setting	33
6.8.4.	Test Setup	34
6.8.5.	Test Result	34
6.9.	AC Conducted Emissions Measurement	35
6.9.1.	Test Limit	35
6.9.2.	Test Setup	35
6.9.3.	Test Result	35
Appendix A – Test Result		36
A.1	Duty Cycle Test Result	36
A.2	26dB & 99% Bandwidth Test Result	38
A.3	6dB Bandwidth Test Result	44
A.4	Output Power Test Result	50
A.5	Power Spectral Density Test Result.....	51
A.6	Frequency Stability Test Result.....	62

A.7	Radiated Spurious Emission Test Result.....	63
A.8	Radiated Restricted Band Edge Test Result.....	86
A.9	AC Conducted Emissions Test Result	134
Appendix B – Test Setup Photograph		136
Appendix C – EUT Photograph		137

1. General Information

1.1. Applicant

Hewlett Packard Enterprise
 6280 America Center Drive, San Jose CA 95002, United States

1.2. Manufacturer

Hewlett Packard Enterprise
 6280 America Center Drive, San Jose CA 95002, United States

1.3. Testing Facility

<input checked="" type="checkbox"/>	<p>Test Site – MRT Suzhou Laboratory</p> <hr/> <p>Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China</p> <p>Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China</p> <hr/> <p>Laboratory Accreditations</p> <p>A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001</p> <p>VCCI: <input type="checkbox"/>R-20025 <input type="checkbox"/>G-20034 <input type="checkbox"/>C-20020 <input type="checkbox"/>T-20020 <input type="checkbox"/>R-20141 <input type="checkbox"/>G-20134 <input type="checkbox"/>C-20103 <input type="checkbox"/>T-20104</p>
<input type="checkbox"/>	<p>Test Site – MRT Shenzhen Laboratory</p> <hr/> <p>Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China</p> <hr/> <p>Laboratory Accreditations</p> <p>A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105</p>
<input type="checkbox"/>	<p>Test Site – MRT Taiwan Laboratory</p> <hr/> <p>Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)</p> <hr/> <p>Laboratory Accreditations</p> <p>TAF: 3261 FCC: 291082, TW3261 ISED: TW3261</p>

1.4. Product Information

Product Name	Access Point
Model No.	APINH605
Serial No.	CNQHLHJ04H (Conducted)
	CNQHLHJ04T (Radiated)
Software Version	RAJB-AB06 V2.0
Wi-Fi Specification	802.11a/b/g/n/ac/ax
Bluetooth Specification	BLE only
ZigBee Specification	802.15.4
GNSS Specification	GPS, Galileo, GLONASS
Antenna Information	Refer to Section 1.7
Power Type	AC Adapter Input or PoE Input
Operating Environment	Indoor Use
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification under Test

Frequency Range	For 802.11a/n-HT20/ac-VHT20/ax-HE20: 5845MHz, 5865MHz, 5885MHz For 802.11n-HT40/ac-VHT40/ax-HE40: 5835MHz, 5875MHz For 802.11ac-VHT80/ax-HE80: 5855MHz	
Type of Modulation	802.11a/n/ac: OFDM 802.11ax: OFDMA	
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.6Mbps 802.11ax: up to 1201Mbps	
Channel Puncturing Function	<input type="checkbox"/> Supported	<input checked="" type="checkbox"/> Unsupported
Support RU	<input checked="" type="checkbox"/> Full RU	<input type="checkbox"/> Partial RU

1.6. Working Frequencies

802.11a/n-HT20/ac-VHT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
169	5845 MHz	173	5865 MHz	177	5885 MHz

802.11n-HT40/ac-VHT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
167	5835 MHz	175	5875 MHz	--	--

802.11ac-VHT80/ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
171	5855 MHz	--	--	--	--

1.7. Antenna Details

Antenna Type	Frequency Band (MHz)	Tx Paths	Directional Gain (dBi)	
			For Power	For PSD
Wi-Fi Antennas				
PIFA	2.4 ~ 2.5	2	4.4	7.4
	5.15 ~ 5.9	2	4.4	7.4
	5.9 ~ 7.2	2	4.0	7.0

Note:

- 1, The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.
- 2, The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac/ax, not include 802.11a/b/g.
- 3, For beamforming operation, Aruba OS automatically backs power down based on CDD power.
- 4, The detail calculation method of directional gain refers to antenna specification provided by the applicant.

1.8. Description of Operating Paths

Filter	Specification	Remark
Wi-Fi		
Filter 1#	Band Pass Filter (2412-2472)	Allowing any transmission on all channels
Filter 2#	Band Pass Filter (2402-2447)	Allowing any transmission on 20MHz channels 1 thru 6 and 40MHz channel 3.
Filter 3#	Band Pass Filter (2452-2472)	Allowing any transmission on 20MHz channel 11
Filter 4#	Band Pass Filter (5150-5895)	Allowing any transmission on all channels
Filter 5#	Band Pass Filter (5150-5835)	Allowing any transmission on UNII Band 1/2a/2c/3
Filter 6#	Band Pass Filter (5925-7125)	Allowing any transmission on UNII Band 5/6/7/8
Bluetooth / ZigBee		
Filter 7#	Band Pass Filter (2402-2480)	Allowing any transmission on all channels
Filter 8#	Band Pass Filter (2402-2430)	Allowing transmission on BLE channels 37 (2402MHz) and 38 (2426MHz) and Zigbee channel 11 (2405MHz)
Filter 9#	Band Pass Filter (2478-2482)	Allowing transmission on BLE channel 39 (2480MHz) and Zigbee channel 26(2480MHz)
Note: ZigBee and BLE can't work simultaneously.		

Working Mode

	Radio 0	Radio 1	BLE/ZigBee
1	2.4G_Full Band (Filter 1#)	6G_Full Band (Filter 6#)	---
2	---	6G_Full Band (Filter 6#)	2.4G_Full Band (Filter 7#)
3	2.4G_Low Band (Filter 2#)	6G_Full Band (Filter 6#)	2.4G_High Band (Filter 9#)
4	2.4G_High Band (Filter 3#)	6G_Full Band (Filter 6#)	2.4G_Low Band (Filter 8#)
5	5G_Full Band (Filter 4#)	2.4G_Full Band (Filter 1#)	---
6	5G_Full Band (Filter 4#)	---	2.4G_Full Band (Filter 7#)
7	5G_Full Band (Filter 4#)	2.4G_Low Band (Filter 2#)	2.4G_High Band (Filter 9#)
8	5G_Full Band (Filter 4#)	2.4G_High Band (Filter 3#)	2.4G_Low Band (Filter 8#)
9	5G_Full Band (Filter 5#)	6G_Full Band (Filter 6#)	2.4G_Full Band (Filter 1#)
10	5G_Full Band (Filter 5#)	6G_Full Band (Filter 6#)	2.4G_Full Band (Filter 1#)
11	5G_Full Band (Filter 5#)	6G_Full Band (Filter 6#)	2.4G_Full Band (Filter 1#)
12	5G_Full Band (Filter 5#)	6G_Full Band (Filter 6#)	2.4G_Full Band (Filter 1#)


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by 802.11a_Nss=1 (6Mbps)
Mode 2: Transmit by 802.11ac-VHT20_Nss=1 (MCS0)
Mode 3: Transmit by 802.11ac-VHT40_Nss=1 (MCS0)
Mode 4: Transmit by 802.11ac-VHT80_Nss=1 (MCS0)
Mode 5: Transmit by 802.11ax-HE20_Nss=1 (MCS0)
Mode 6: Transmit by 802.11ax-HE40_Nss=1 (MCS0)
Mode 7: Transmit by 802.11ax-HE80_Nss=1 (MCS0)
Note 1: 802.11n and 802.11ac have same modulation type and same power value, so we only show 802.11ac test data in report.
Note 2: All modes of operation and data rates were investigated, so all RF test requirements shall be executed at the worst data rate.
Note 3: For beamforming operation, manufacturer automatically backs power down based on CDD power. Therefore, only the CDD mode was evaluated in this report

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

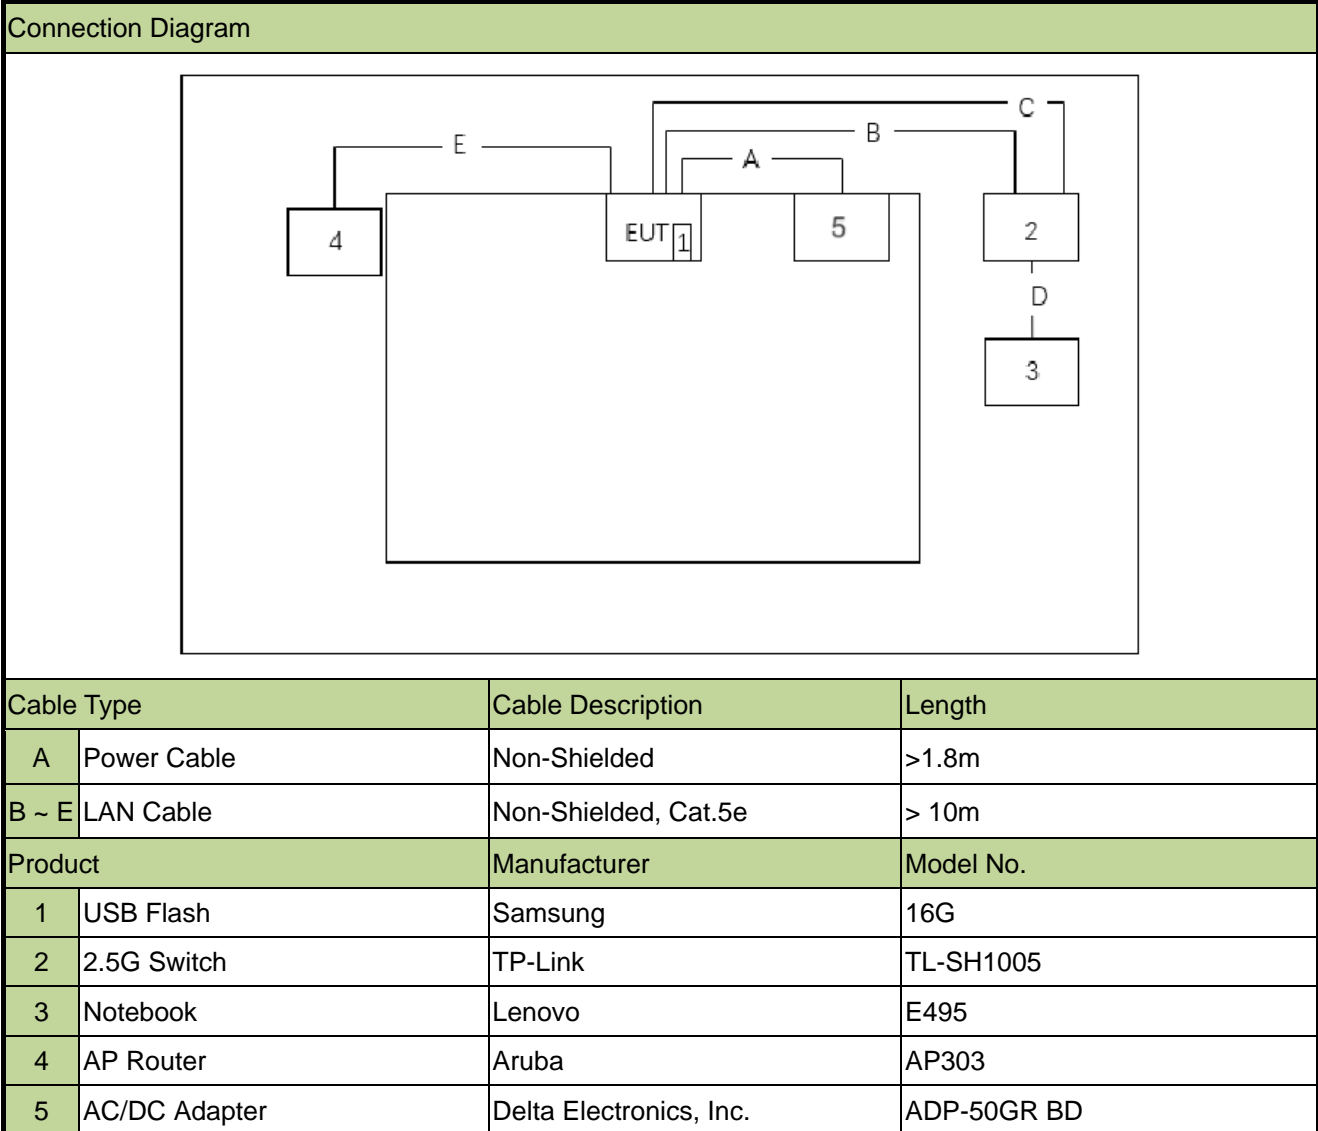

2.3. Test Software

The test utility software used during testing was “accessMTool”, and the version was 3.2.1.5.

Final power setting please refer to operational description.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.407
- KDB 789033 D02v02r01
- KDB 291074 D02v01
- KDB 662911 D01v02r01
- ANSI C63.10-2013

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

KDB 291074 DR01: An Indoor Access point in the U-NII-4 band (5.850-5.895 GHz) and U-NII -3 & -4 span channels must use an integrated antenna

- The antenna of the device is built in and locked inside the enclosure.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06598	1 year	2023-11-05	SIP-AC2
Preamplifier	EMCI	EMC051845SE	MRTSUE06601	1 year	2023-11-22	SIP-AC2
Thermohygrometer	testo	608-H1	MRTSUE06622	1 year	2023-11-27	SIP-AC2
Thermohygrometer	testo	608-H1	MRTSUE06624	1 year	2023-11-27	SIP-AC2
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06647	1 year	2024-06-17	SIP-AC2
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2023-12-22	SIP-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2024-05-23	SIP-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE06603	1 year	2023-10-25	SIP-AC1
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2023-12-22	SIP-AC1
Preamplifier	EMCI	EMC051845SE	MRTSUE06600	1 year	2023-11-07	SIP-AC1
Horn Antenna	R&S	HF907	MRTSUE06610	1 year	2024-06-17	SIP-AC1
Thermohygrometer	testo	608-H1	MRTSUE06616	1 year	2023-11-01	SIP-AC1
Thermohygrometer	testo	608-H1	MRTSUE06620	1 year	2023-11-27	SIP-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06645	1 year	2023-07-30	SIP-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06645	1 year	2024-07-13	SIP-AC1
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2023-10-10	SIP-AC1
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06599	1 year	2023-10-13	SIP-AC1
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2024-06-07	SIP-AC3
Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2023-07-30	SIP-AC3
Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2024-07-14	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06619	1 year	2023-11-01	SIP-AC3
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2024-01-12	SIP-AC3
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06646	1 year	2023-08-16	SIP-AC3
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06646	1 year	2024-08-04	SIP-AC3
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2023-12-22	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06622	1 year	2023-11-27	SIP-AC3
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2023-12-28	SIP-AC3
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2024-05-23	WZ-AC2
Thermohygrometer	Mingle	ETH529	MRTSUE06170	1 year	2023-11-27	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2024-04-20	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11038	1 year	2023-11-01	WZ-AC2
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2024-09-17	WZ-AC2
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2024-05-23	WZ-SR2
Shielding Room	MIX-BEP	WZ-SR2	MRTSUE06215	5 years	2026-12-20	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2024-05-31	WZ-SR2

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Four-Line V-Network	R&S	ENV432	MRTSUE06615	1 year	2023-10-08	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2023-10-27	WZ-SR2
USB Power Sensor	Keysight	U2021XA	MRTSUE06446	1 year	2024-05-23	WZ-SR5
Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2024-02-29	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2024-05-23	WZ-SR5
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2024-05-31	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11079	1 year	2024-06-08	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11083	1 year	2024-06-08	WZ-SR5
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2023-10-08	WZ-TR3
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2024-09-27	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2024-05-31	WZ-TR3
Signal Analyzer	Keysight	N9010B	MRTSUE06558	1 year	2024-05-23	WZ-TR3

Software	Version	Function
EMI V3	V 3.0.0	EMI Test Software
Controller_MF 7802BS	1.02	RE Antenna & Turntable
BenchVue Power Meter	2018.1	Power
Controller_MF 7802	1.02	RE Antenna & Turntable

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.59dB Coplanar: 9kHz~30MHz: 2.60dB Horizontal: 30MHz~200MHz: 3.85dB 200MHz~1GHz: 4.36dB 1GHz~40GHz: 4.98dB Vertical: 30MHz~200MHz: 4.06dB 200MHz~1GHz: 5.28dB 1GHz~40GHz: 4.91dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.3dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.5dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.3dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 3.2%

Frequency Stability

Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$):

37.99 Hz

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.407(a)	26dB Bandwidth	Conducted	Pass
15.407(e)	6dB Bandwidth		Pass
15.407(a)(3)(ii)	Maximum Conducted Output Power		Pass
15.407(a)(3)(ii)(12)	Peak Power Spectral Density		Pass
15.407(g)	Frequency Stability		Pass
15.407(b)(5)	Undesirable Emissions	Radiated	Pass
15.205, 15.209 15.407(b)(5)(i), (8), (9)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)		Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Notes:

1. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
2. For radiated emission test, every axis (X, Y, Z) was also verified. The detailed axis (X, Y, Z) setup refers to "2306RSU039-UT" and axis (X) is the worst condition. The test results shown in the following sections represent the worst-case emissions.
3. Test Item "Occupied Bandwidth" has been assessed MIMO transmission and showed the worst single test data in this report.

6.2. 26dB & 99% Bandwidth Measurement

6.2.1. Test Limit

N/A

6.2.2. Test Procedure

KDB 789033 D02v02r01- Section II)C)1) (26dB Bandwidth)

KDB 789033 D02v02r01- Section II)D) (99% Bandwidth)

6.2.3. Test Setting


26dB Bandwidth

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold.

99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1% to 5% of the OBW
4. Set VBW $\geq 3 \times$ RBW
5. Detector = Peak.
6. Use the 99% power bandwidth function of the instrument.

6.2.4. Test Setup

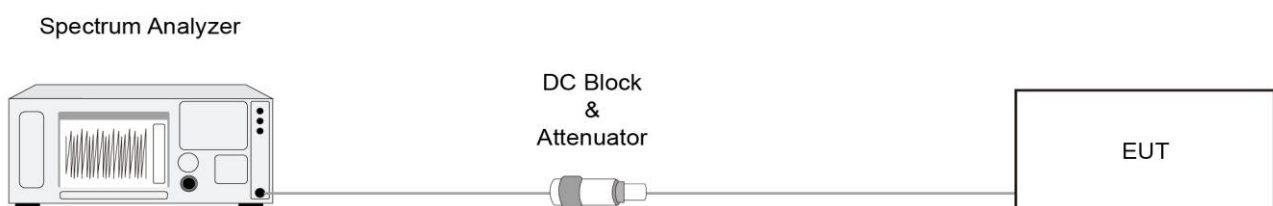

6.2.5. Test Result

Refer to Appendix A.2.

6.3. 6dB Bandwidth Measurement

6.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.3.2. Test Procedure

KDB 789033 D02v02r01- Section II)C)2)

6.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.4. Test Setup

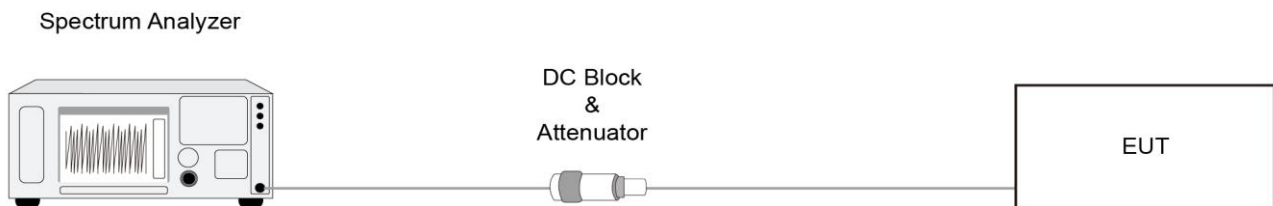

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Output Power Measurement

6.4.1. Test Limit

For an indoor access point operating in the 5.850-5.895 GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm. Indoor access points operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands must not exceed an e.i.r.p. of 36 dBm.

6.4.2. Test Procedure


KDB 789033D02v02r01- Section II)E)3)b) Method PM-G

6.4.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.4.4. Test Setup

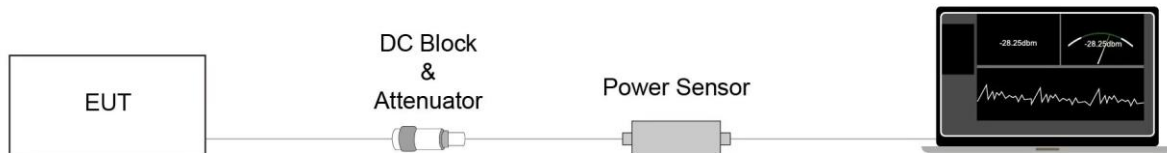

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Power Spectral Density Measurement

6.5.1. Test Limit

For an indoor access point operating in the 5.850-5.895 GHz band, the maximum power spectral density must not exceed 20 dBm e.i.r.p. in any 1-megahertz band.


6.5.2. Test Procedure

KDB 789033 D02v02r01-Section II)F)

6.5.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz
4. VBW = 3 × RBW
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

6.5.4. Test Setup

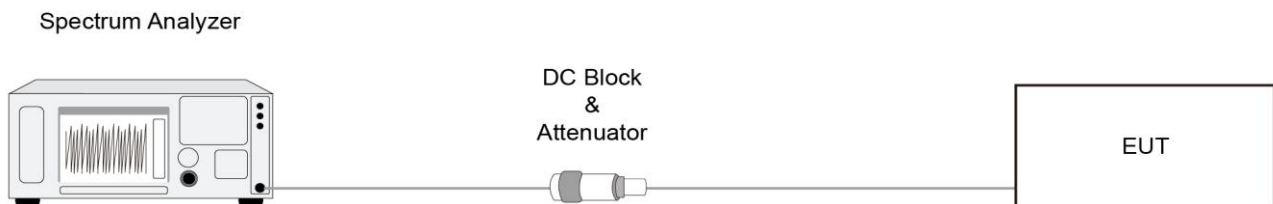

6.5.5. Test Result

Refer to Appendix A.5.

6.6. Frequency Stability Measurement

6.6.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.6.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

6.6.3. Test Setup

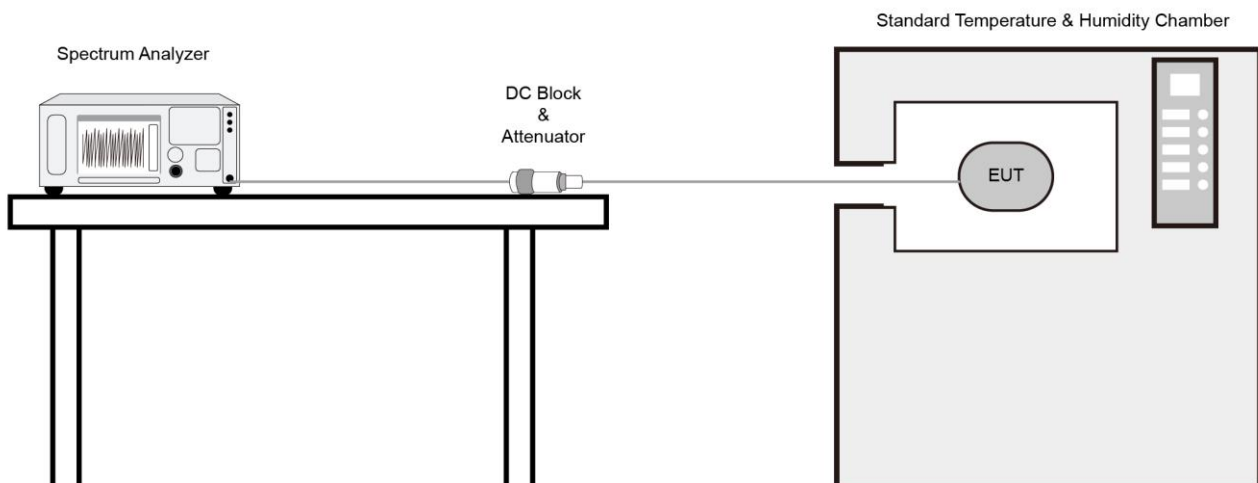

6.6.4. Test Result

Refer to Appendix A.6.

6.7. Radiated Spurious Emission Measurement

6.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2. Test Procedure

KDB 789033 D02v02r01- Section II)G).

6.7.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.


If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.

802.11a	VBW = 510Hz	802.11ax-HE20	VBW = 680Hz
802.11ac-VHT20	VBW = 10Hz	802.11ax-HE40	VBW = 1300Hz
802.11ac-VHT40	VBW = 1100Hz	802.11ax-HE80	VBW = 2700Hz
802.11ac-VHT80	VBW = 2200Hz		


4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.7.4. Test Setup


Below 30MHz Test Setup:

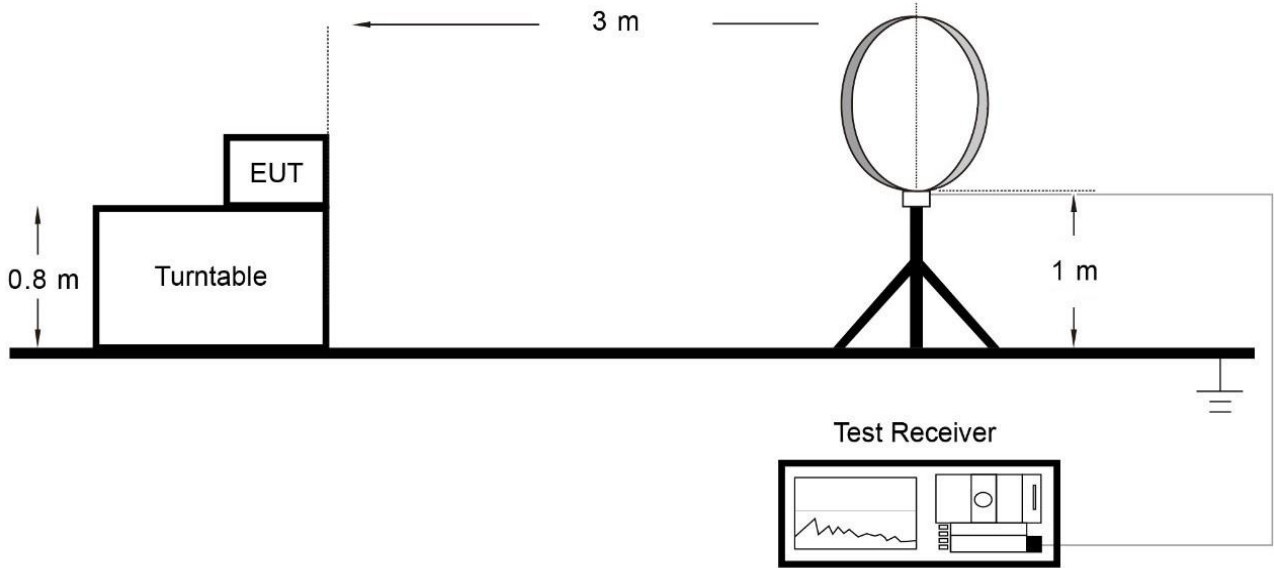

Below 1GHz Test Setup:

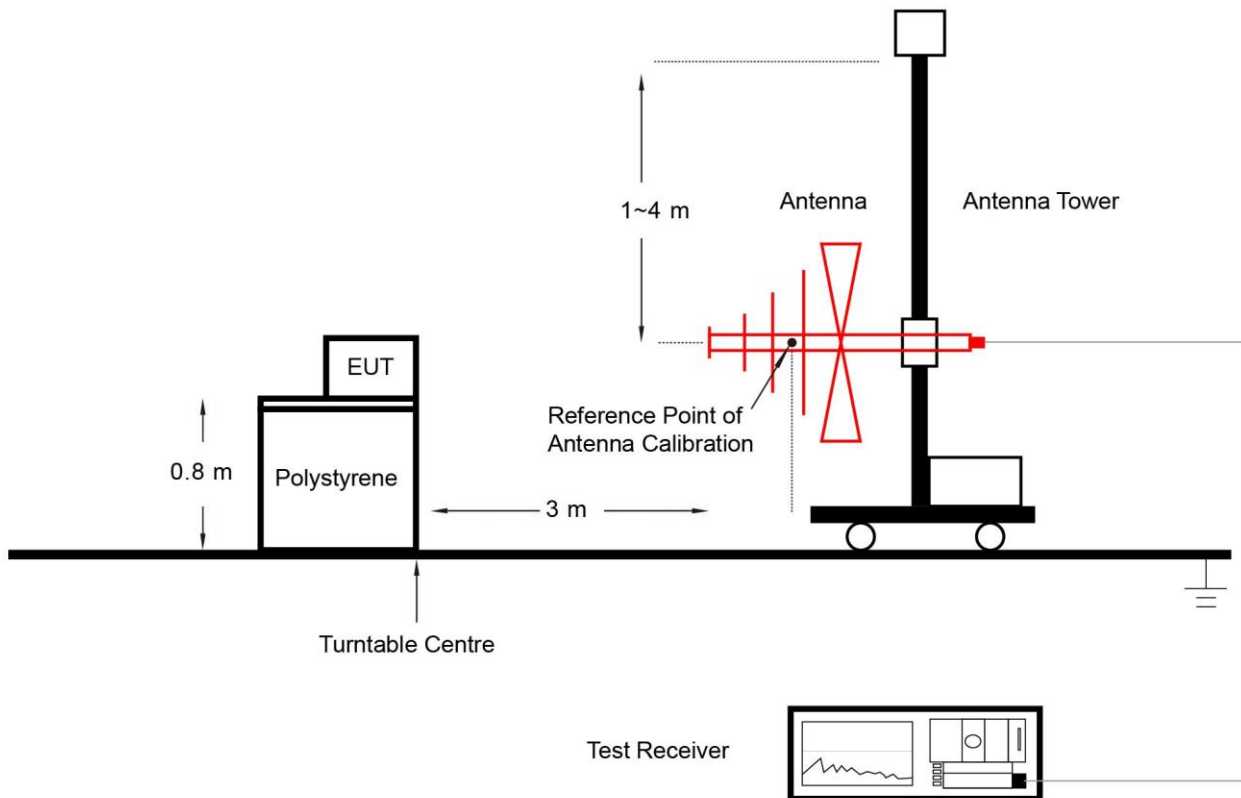

Above 1GHz Test Setup:

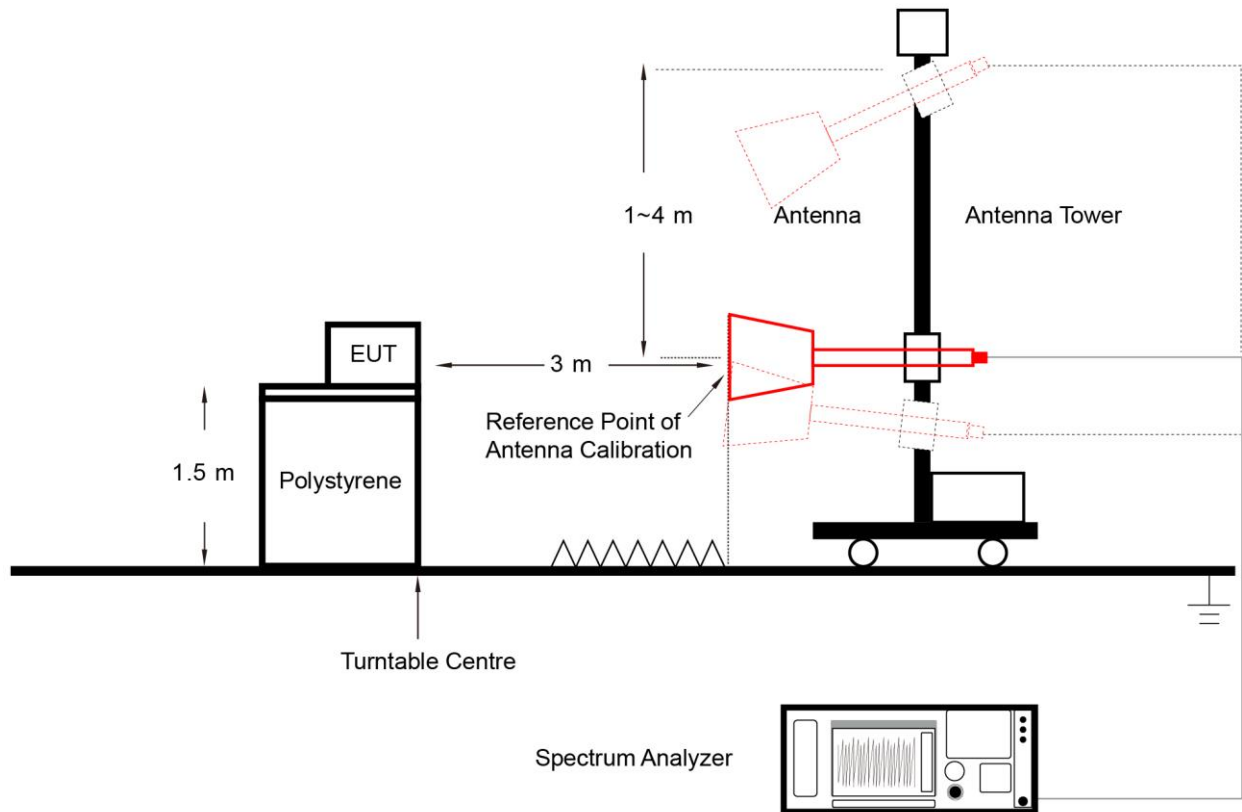

6.7.5. Test Result

Refer to Appendix A.7.

6.8. Radiated Restricted Band Edge Measurement

6.8.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

For an indoor access point, all emissions at or above 5.895GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of -7 dBm/MHz at or above 5.925GHz.

For indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

$E \text{ [dB}\mu\text{V/m]} = \text{EIRP [dBm]} + 95.2$, for example, $-27 \text{ dBm/MHz} = 68.2 \text{ dB}\mu\text{V/m}$

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.8.2. Test Procedure

KDB 789033 D02v02r01- Section II)G)

6.8.3. Test Setting

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
4. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration

802.11a	VBW = 510Hz	802.11ax-HE20	VBW = 680Hz
802.11ac-VHT20	VBW = 10Hz	802.11ax-HE40	VBW = 1300Hz
802.11ac-VHT40	VBW = 1100Hz	802.11ax-HE80	VBW = 2700Hz
802.11ac-VHT80	VBW = 2200Hz		

5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.8.4. Test Setup

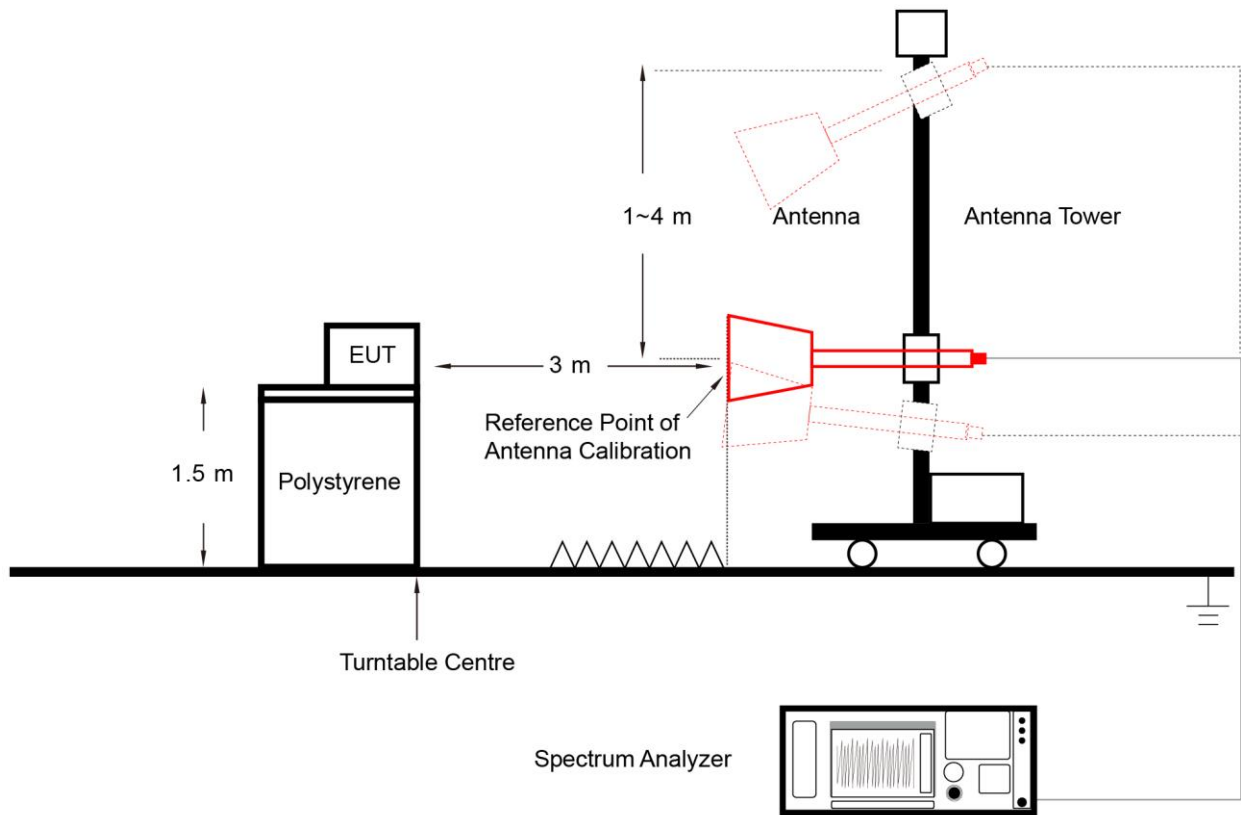

6.8.5. Test Result

Refer to Appendix A.8.

6.9. AC Conducted Emissions Measurement


6.9.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.9.2. Test Setup

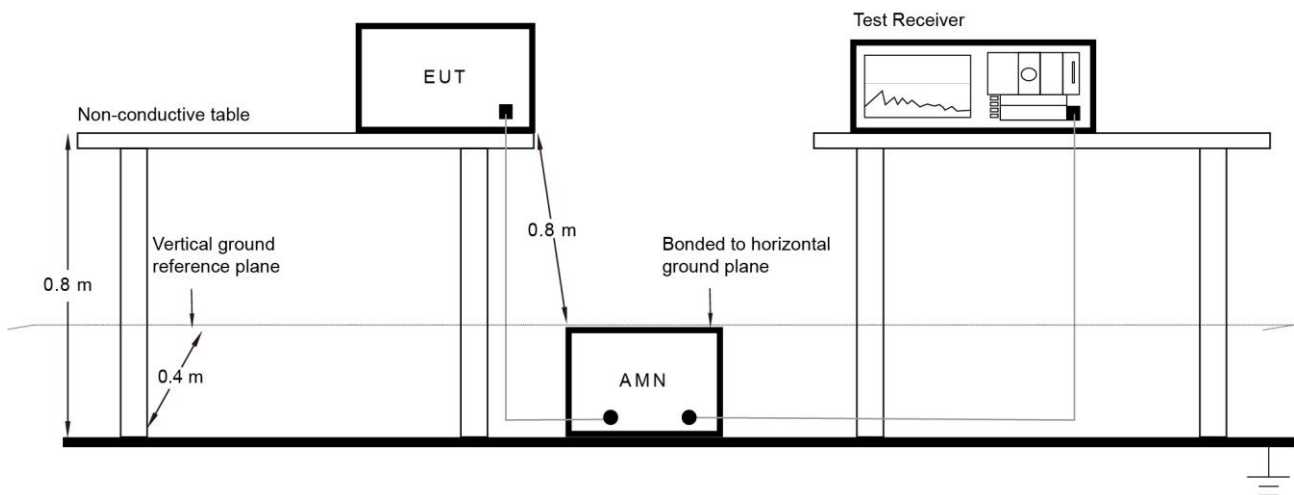

6.9.3. Test Result

Refer to Appendix A.9.

Appendix A – Test Result


A.1 Duty Cycle Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-07-10		


Test Mode	Duty Cycle
802.11a	94.71%
802.11ac-VHT20	98.21%
802.11ac-VHT40	96.90%
802.11ac-VHT80	93.53%
802.11ax-HE20	97.76%
802.11ax-HE40	96.06%
802.11ax-HE80	92.38%

Duty Cycle (T = Transmission Duration)


802.11a (T = 2.060ms)

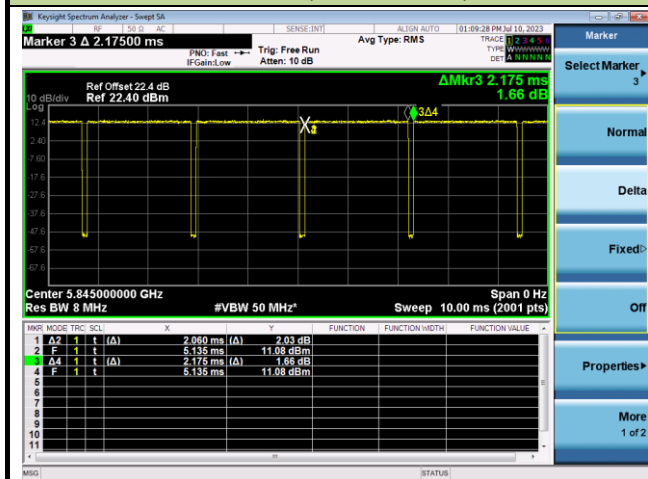


802.11ac-VHT20 (T = 1.925ms)

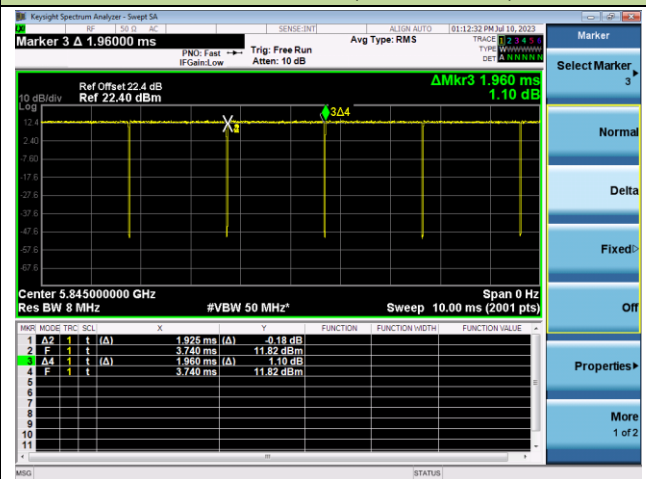

802.11ac-VHT40 (T = 950.0us)

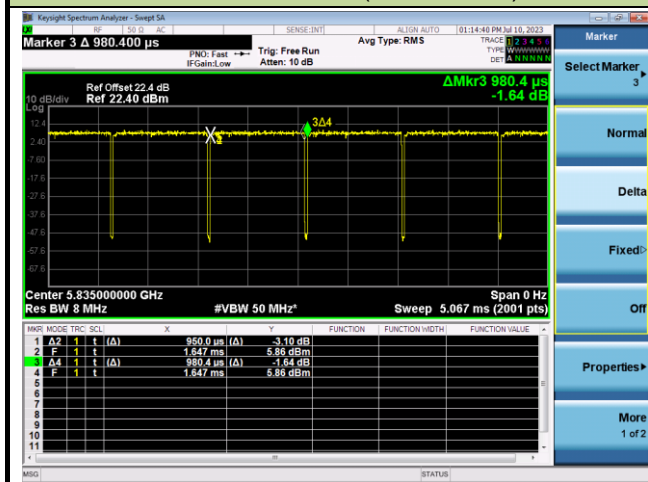


802.11ac-VHT80 (T = 458.5us)

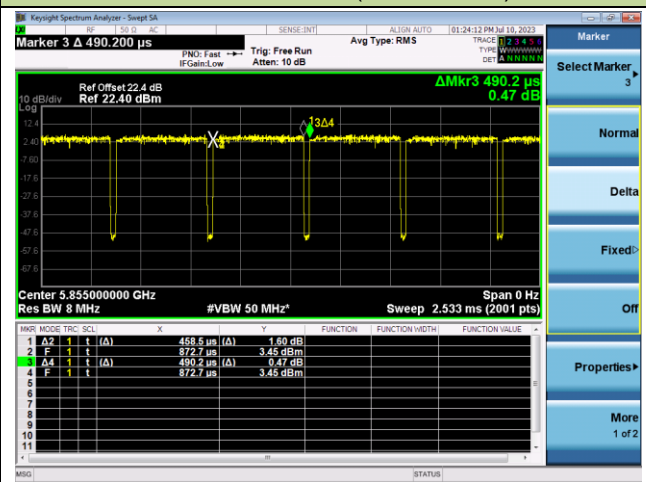


Duty Cycle (T = Transmission Duration)


802.11ax-HE20 (T = 1.486ms)

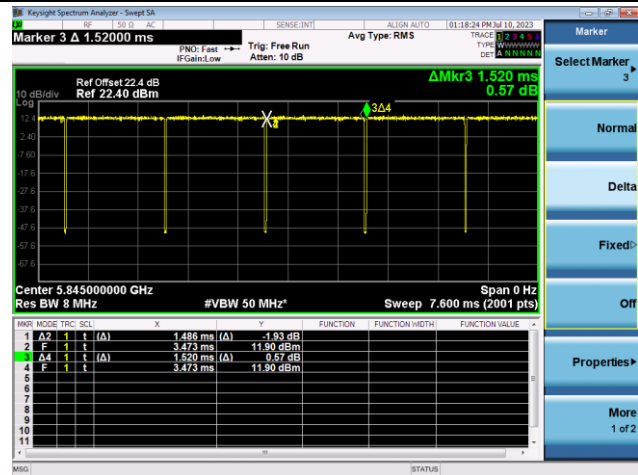

802.11ax-HE40 (T = 780.0us)

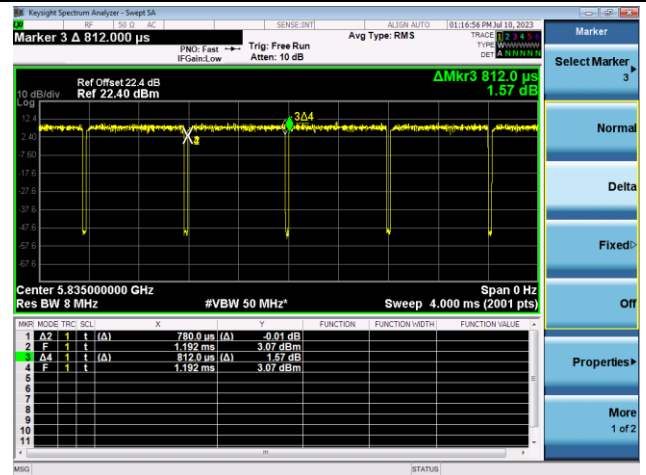

802.11ax-HE80 (T = 412.0us)

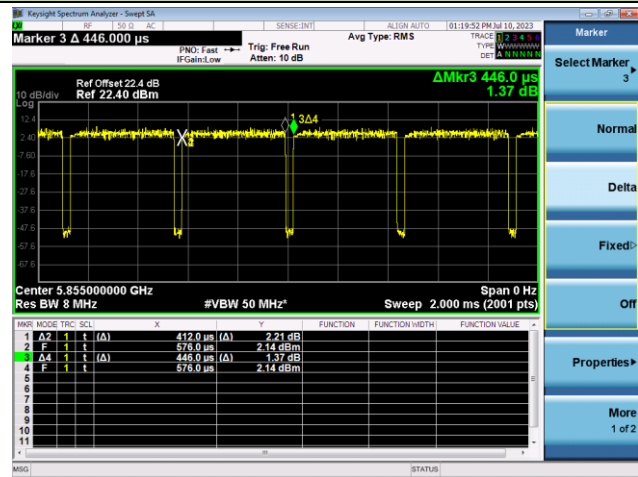


A.2 26dB & 99% Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-07-10 ~ 2023-11-29		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	99% Bandwidth (MHz)	26dB Bandwidth (MHz)
11a	6Mbps	169	5845	17.503	36.62
11a	6Mbps	173	5865	17.548	36.47
11a	6Mbps	177	5885	17.639	33.54
11ac-VHT20	MCS0	169	5845	18.250	26.77
11ac-VHT20	MCS0	173	5865	18.180	30.62
11ac-VHT20	MCS0	177	5885	18.484	31.84
11ac-VHT40	MCS0	167	5835	36.514	50.86
11ac-VHT40	MCS0	175	5875	36.563	54.60
11ac-VHT80	MCS0	171	5855	76.101	114.7
11ax-HE20	MCS0	169	5845	19.291	30.41
11ax-HE20	MCS0	173	5865	19.290	30.33
11ax-HE20	MCS0	177	5885	19.252	31.57
11ax-HE40	MCS0	167	5835	37.688	51.25
11ax-HE40	MCS0	175	5875	37.791	66.76
11ax-HE80	MCS0	171	5855	77.132	99.95

802.11a 26dB Bandwidth


Channel 169 (5845MHz)

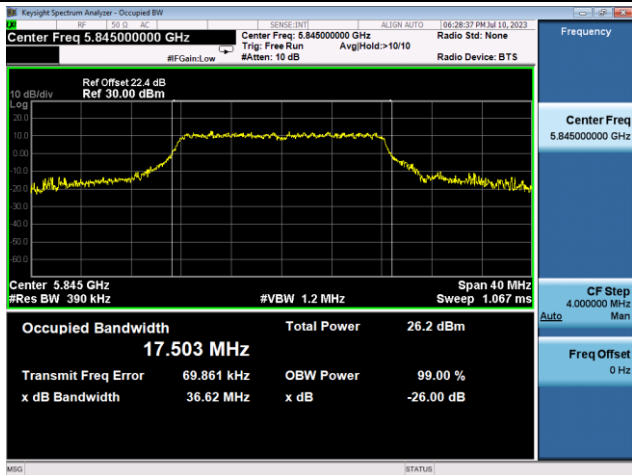

Channel 173 (5865MHz)

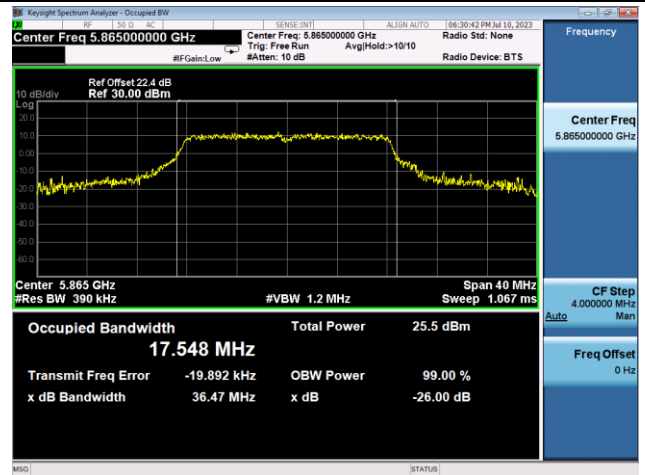


Channel 177 (5885MHz)

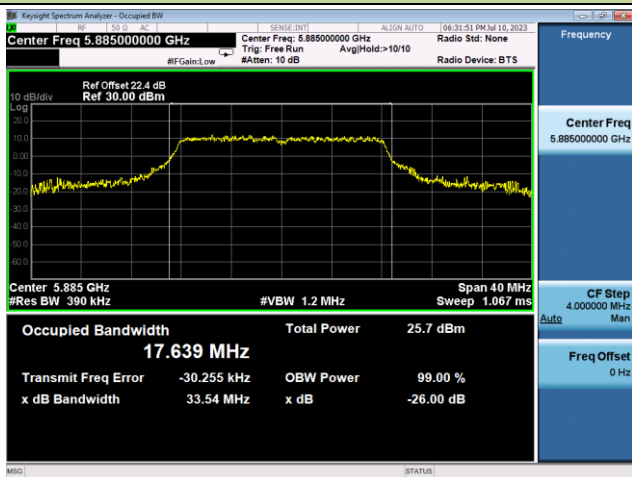


802.11ac-VHT20 26dB Bandwidth


Channel 169 (5845MHz)


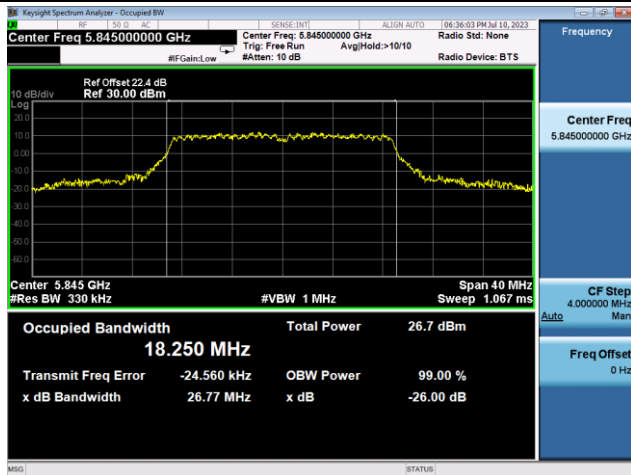


Channel 173 (5865MHz)

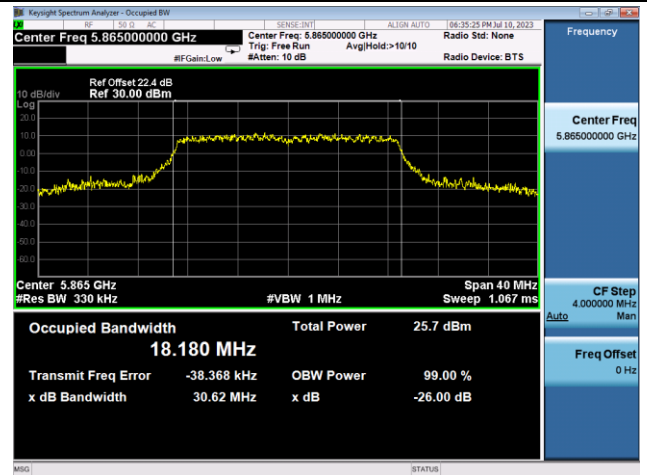


Channel 177 (5885MHz)

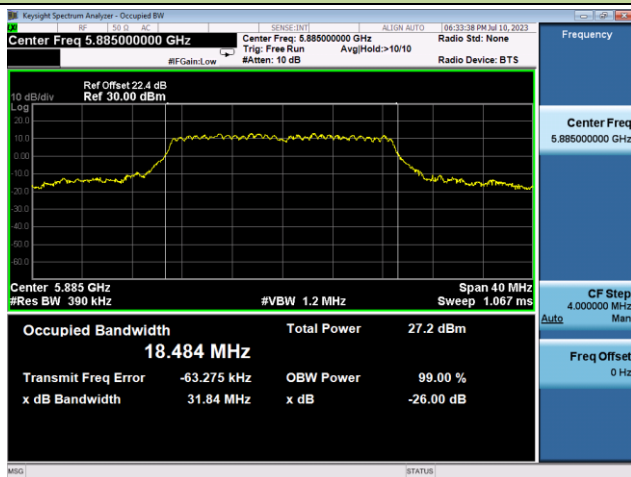

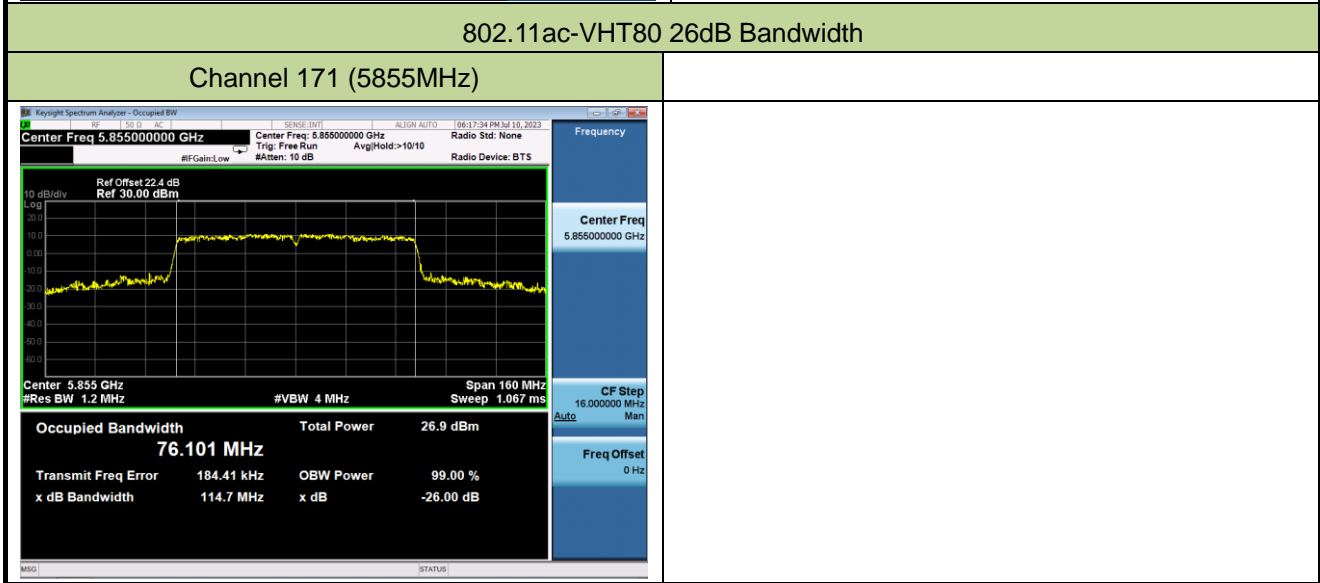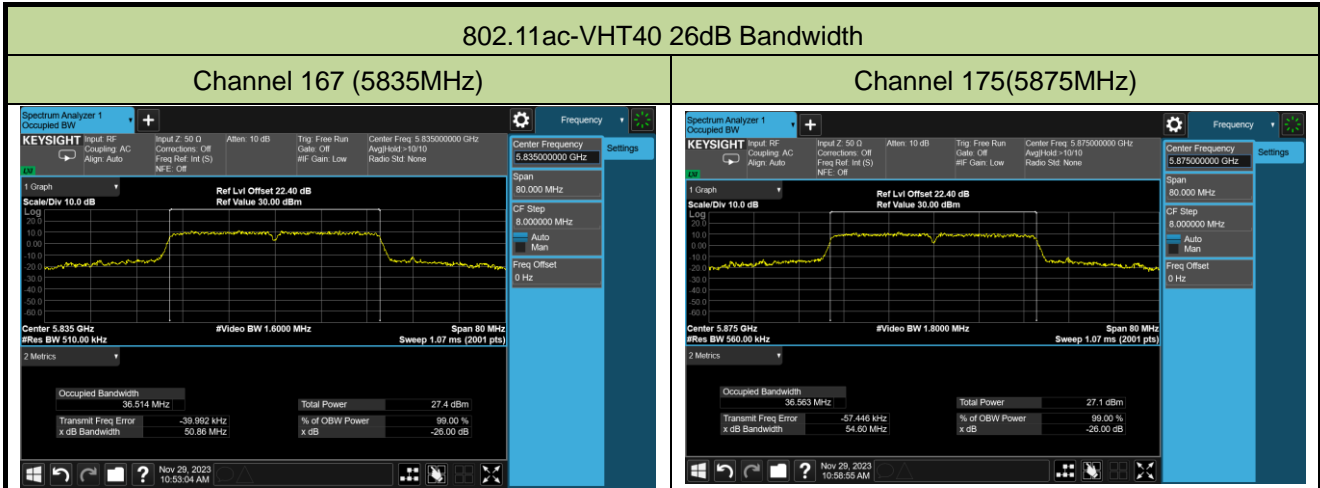


802.11ax-HE20 26dB Bandwidth


Channel 169 (5845MHz)

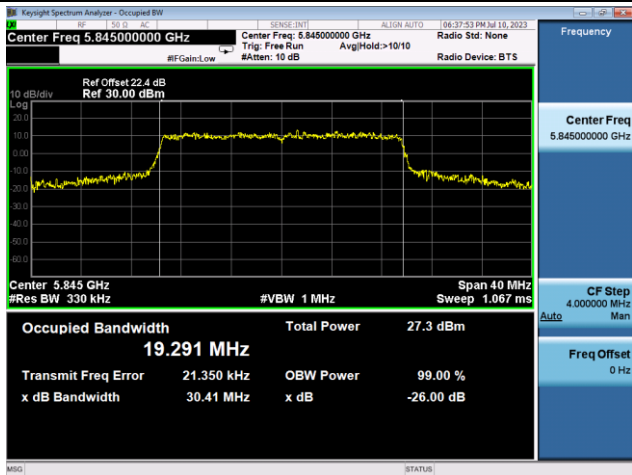


Channel 173 (5865MHz)

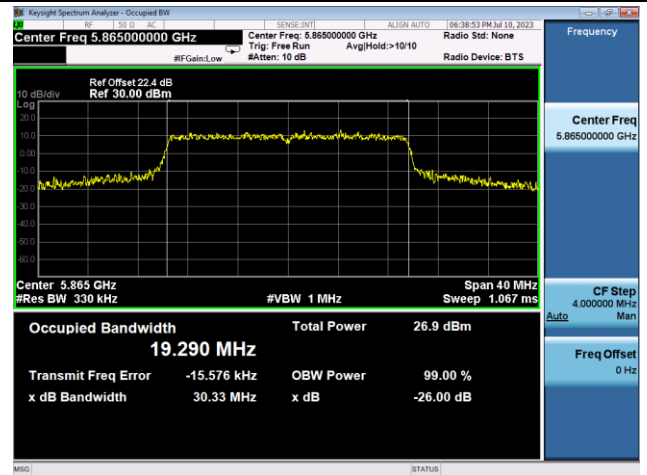

Channel 177 (5885MHz)

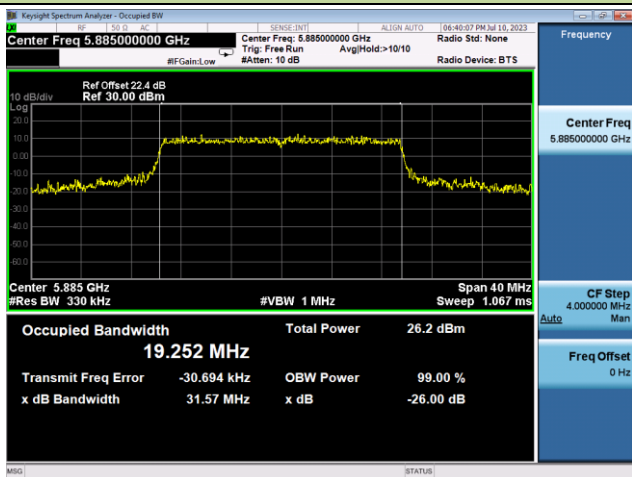

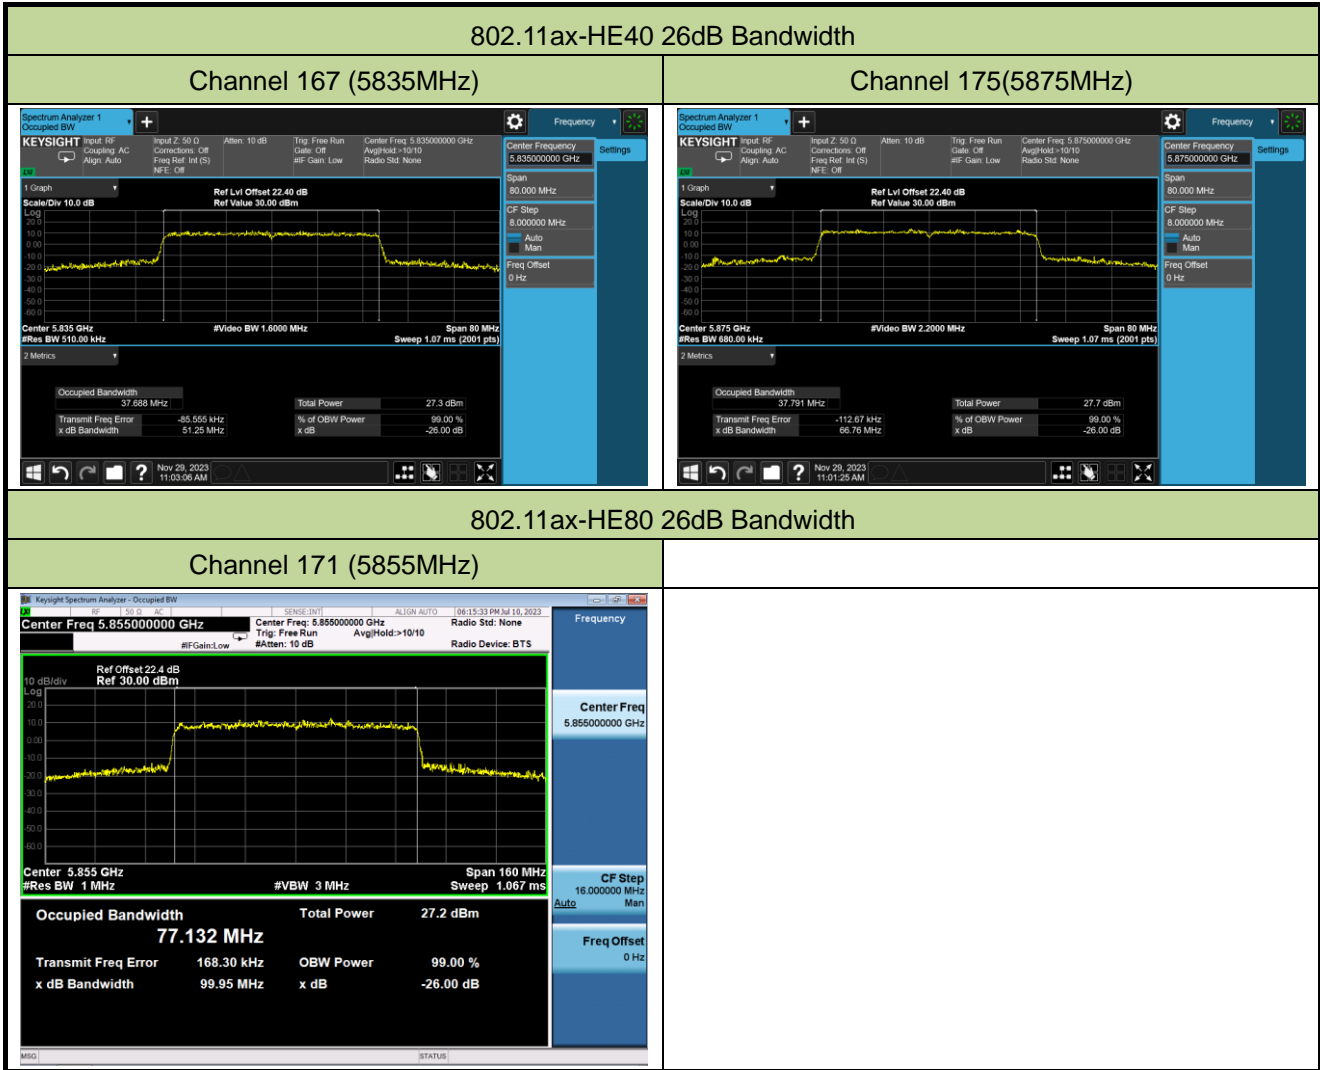


A.3 6dB Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-07-10		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11a	6Mbps	169	5845	16.36	≥ 0.5
11a	6Mbps	173	5865	16.36	≥ 0.5
11a	6Mbps	177	5885	16.33	≥ 0.5
11ac-VHT20	MCS0	169	5845	17.60	≥ 0.5
11ac-VHT20	MCS0	173	5865	17.59	≥ 0.5
11ac-VHT20	MCS0	177	5885	17.59	≥ 0.5
11ac-VHT40	MCS0	167	5835	36.34	≥ 0.5
11ac-VHT40	MCS0	175	5875	36.38	≥ 0.5
11ac-VHT80	MCS0	171	5855	75.25	≥ 0.5
11ax-HE20	MCS0	169	5845	18.73	≥ 0.5
11ax-HE20	MCS0	173	5865	18.90	≥ 0.5
11ax-HE20	MCS0	177	5885	18.71	≥ 0.5
11ax-HE40	MCS0	167	5835	37.57	≥ 0.5
11ax-HE40	MCS0	175	5875	37.59	≥ 0.5
11ax-HE80	MCS0	171	5855	75.26	≥ 0.5

802.11a 6dB Bandwidth


Channel 169 (5845MHz)

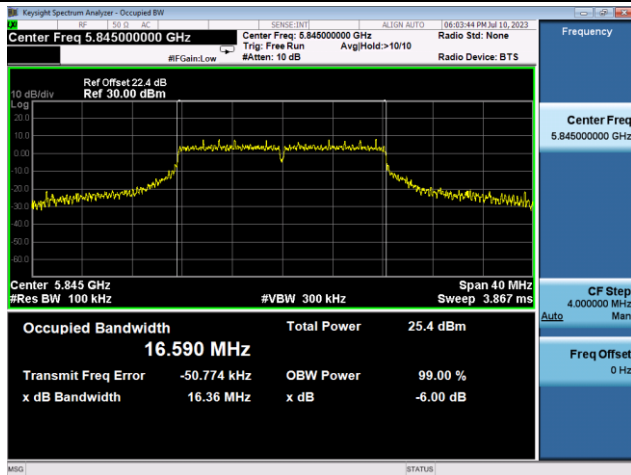

Channel 173 (5865MHz)

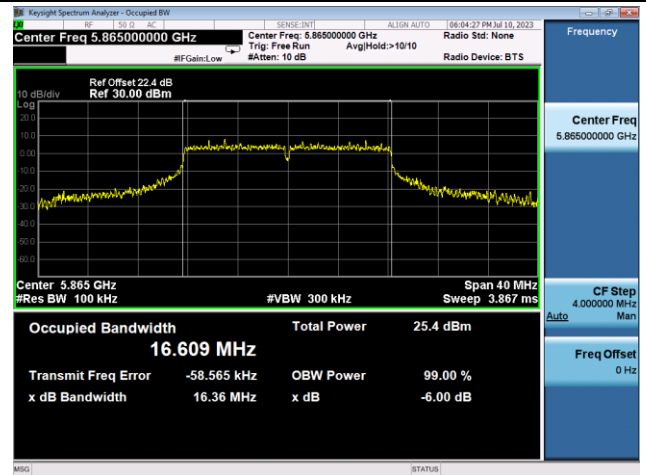


Channel 177 (5885MHz)

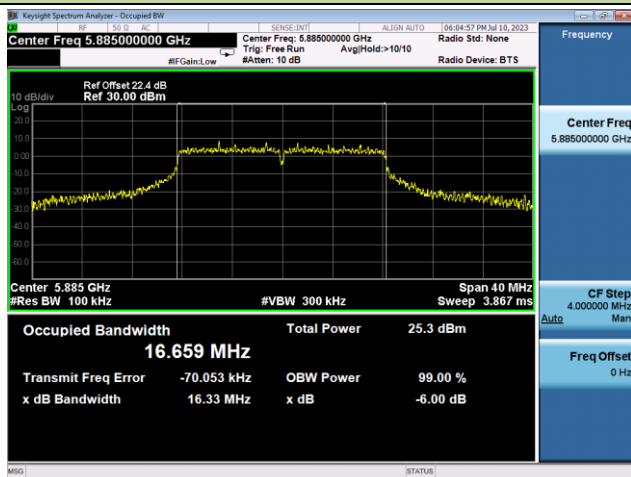


802.11ac-VHT20 6dB Bandwidth


Channel 169 (5845MHz)

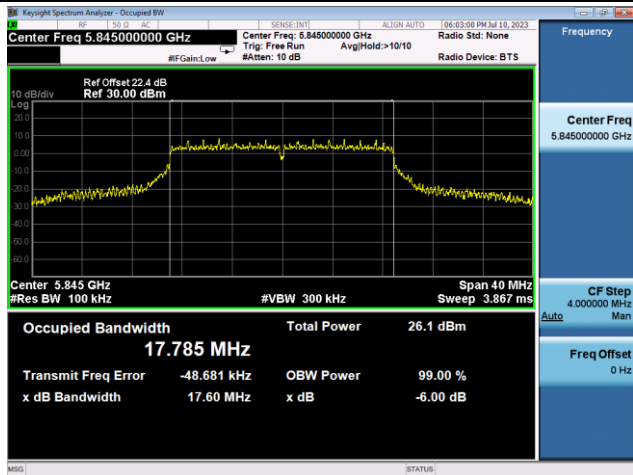

Channel 173 (5865MHz)

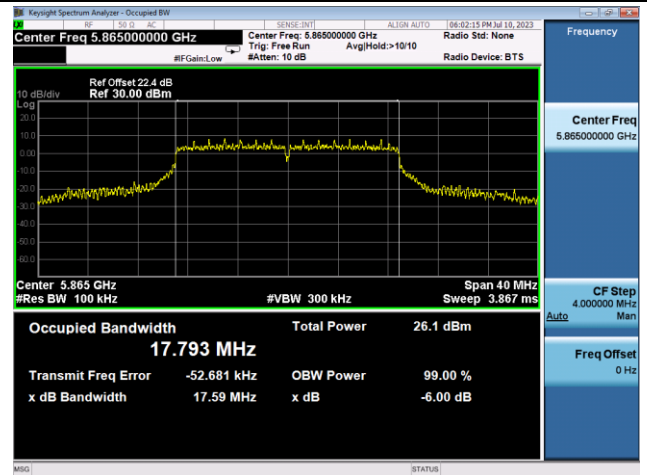


Channel 177 (5885MHz)

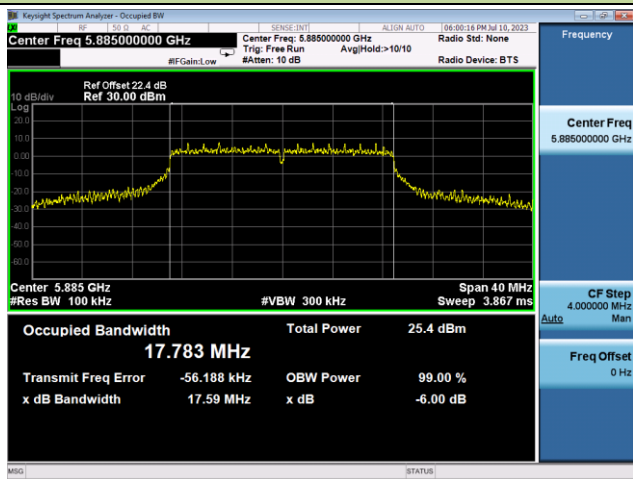


802.11ac-VHT40 6dB Bandwidth

Channel 167 (5835MHz)

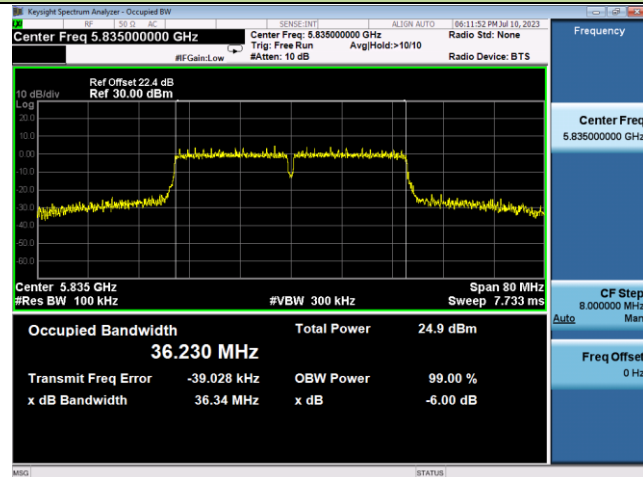


Channel 175(5875MHz)

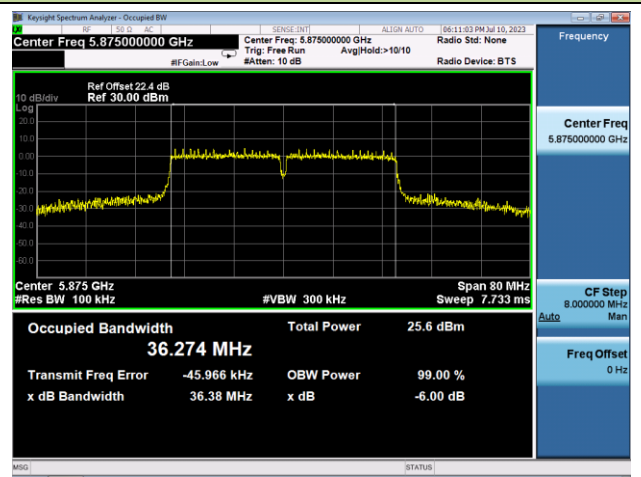


802.11ac-VHT80 6dB Bandwidth

Channel 171 (5855MHz)

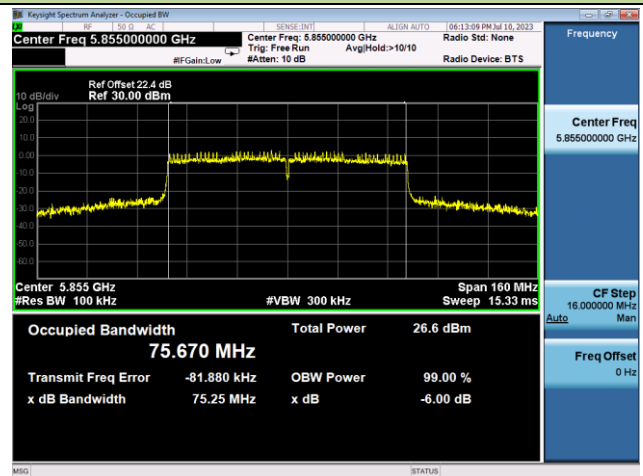


802.11ax-HE20 6dB Bandwidth


Channel 169 (5845MHz)

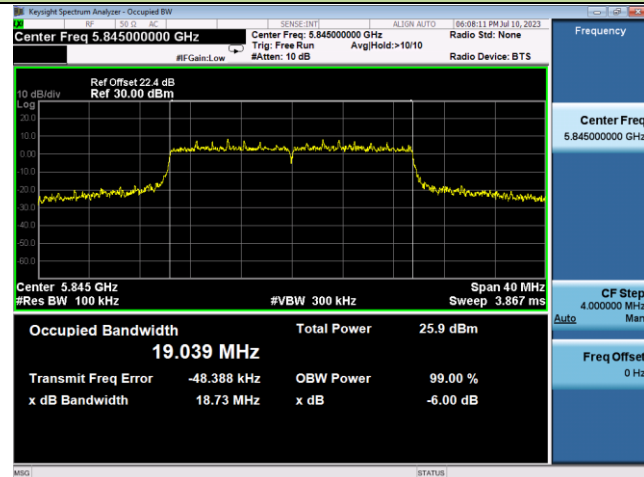

Channel 173 (5865MHz)

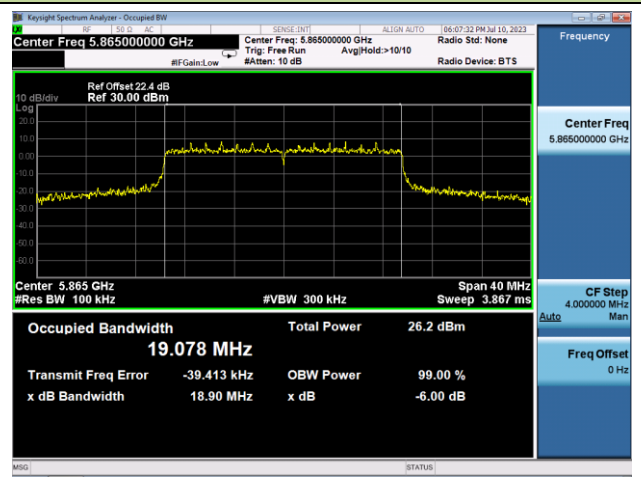


Channel 177 (5885MHz)

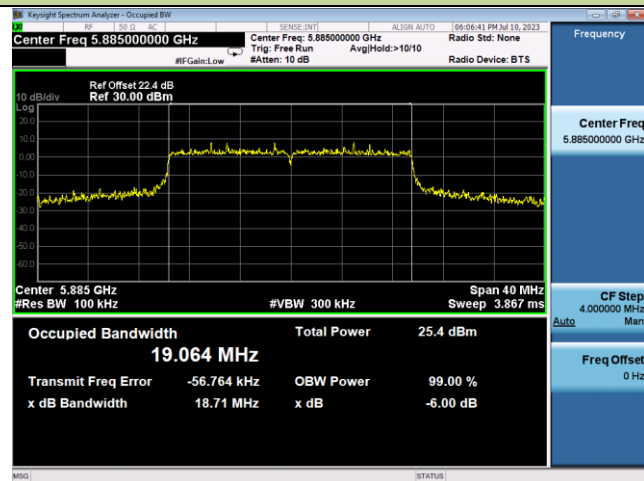


802.11ax-HE40 6dB Bandwidth

Channel 167 (5835MHz)

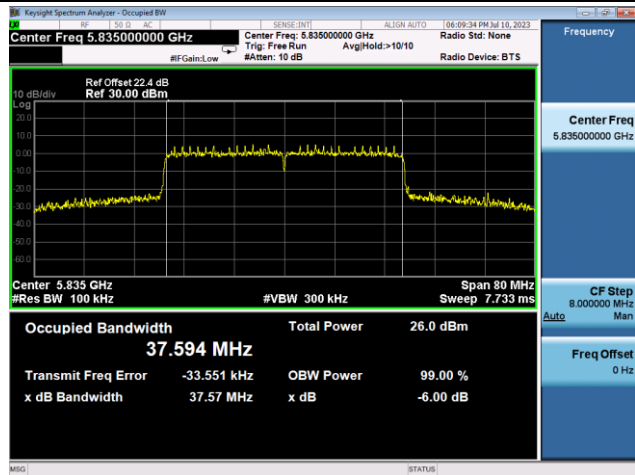


Channel 175(5875MHz)

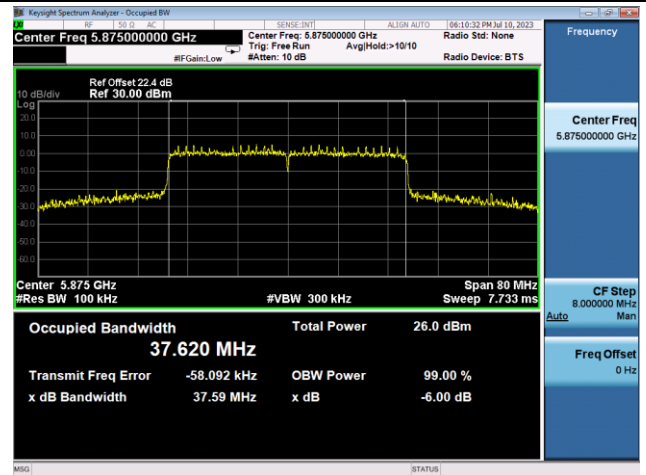

802.11ax-HE80 6dB Bandwidth

Channel 171 (5855MHz)

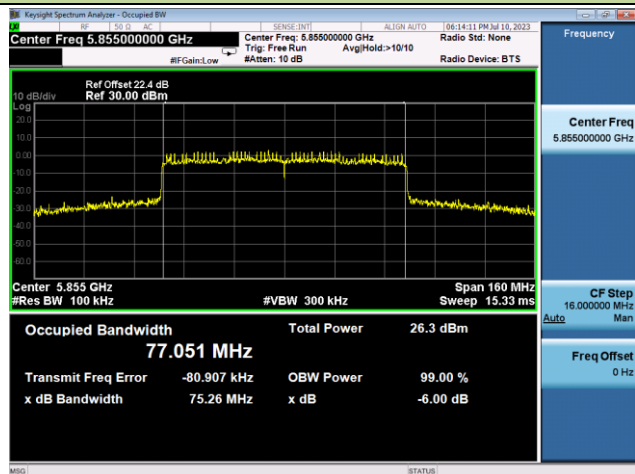

A.4 Output Power Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-07-18		

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	EIRP (dBm)	EIRP Limit (dBm)
				Ant 0	Ant 1			
11a	6Mbps	169	5845	17.38	18.41	20.94	25.34	≤ 36.00
11a	6Mbps	173	5865	17.44	18.22	20.86	25.26	≤ 36.00
11a	6Mbps	177	5885	17.28	18.33	20.85	25.25	≤ 36.00
11ac-VHT20	MCS0	169	5845	17.56	18.32	20.97	25.37	≤ 36.00
11ac-VHT20	MCS0	173	5865	17.38	18.31	20.88	25.28	≤ 36.00
11ac-VHT20	MCS0	177	5885	17.56	18.21	20.91	25.31	≤ 36.00
11ac-VHT40	MCS0	167	5835	18.29	18.10	21.21	25.61	≤ 36.00
11ac-VHT40	MCS0	175	5875	18.31	17.80	21.07	25.47	≤ 36.00
11ac-VHT80	MCS0	171	5855	17.92	18.49	21.22	25.62	≤ 36.00
11ax-HE20	MCS0	169	5845	17.52	18.43	21.01	25.41	≤ 36.00
11ax-HE20	MCS0	173	5865	17.71	18.27	21.01	25.41	≤ 36.00
11ax-HE20	MCS0	177	5885	17.56	18.38	21.00	25.40	≤ 36.00
11ax-HE40	MCS0	167	5835	18.48	17.80	21.16	25.56	≤ 36.00
11ax-HE40	MCS0	175	5875	18.07	18.24	21.17	25.57	≤ 36.00
11ax-HE80	MCS0	171	5855	18.46	18.48	21.48	25.88	≤ 36.00

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: EIRP Power (dBm) = Total Average Power (dBm) + Directional Gain (dBi).

A.5 Power Spectral Density Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2023-07-18		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/MHz)		Duty Cycle (%)	Total PSD (dBm/MHz)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)
				Ant 0	Ant 1				
11a	6Mbps	169	5845	6.747	7.196	94.71	10.22	17.62	≤ 20.00
11a	6Mbps	173	5865	6.173	7.220	94.71	9.97	17.37	≤ 20.00
11a	6Mbps	177	5885	6.151	6.464	94.71	9.56	16.96	≤ 20.00
11ac-VHT20	MCS0	169	5845	6.403	7.339	98.21	9.91	17.31	≤ 20.00
11ac-VHT20	MCS0	173	5865	6.418	6.792	98.21	9.62	17.02	≤ 20.00
11ac-VHT20	MCS0	177	5885	5.642	6.778	98.21	9.26	16.66	≤ 20.00
11ac-VHT40	MCS0	167	5835	3.590	3.044	96.90	6.47	13.87	≤ 20.00
11ac-VHT40	MCS0	175	5875	3.346	3.579	96.90	6.61	14.01	≤ 20.00
11ac-VHT80	MCS0	171	5855	0.971	1.241	93.53	4.41	11.81	≤ 20.00
11ax-HE20	MCS0	169	5845	6.546	6.912	97.76	9.84	17.24	≤ 20.00
11ax-HE20	MCS0	173	5865	6.074	6.989	97.76	9.66	17.06	≤ 20.00
11ax-HE20	MCS0	177	5885	6.412	6.531	97.76	9.58	16.98	≤ 20.00
11ax-HE40	MCS0	167	5835	3.237	3.485	96.06	6.55	13.95	≤ 20.00
11ax-HE40	MCS0	175	5875	3.582	3.145	96.06	6.55	13.95	≤ 20.00
11ax-HE80	MCS0	171	5855	1.366	0.996	92.38	4.54	11.94	≤ 20.00

Note 1: When EUT duty cycle < 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{ 10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} \} + 10 \cdot \log (1/\text{Duty cycle})$.


When EUT duty cycle > 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{ 10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} \}$

Note 2: EIRP PSD (dBm/MHz) = Total PSD (dBm/MHz) + Directional Gain (dBi).


Note 3: For Channels span the 5.725-5.850 GHz and 5.850-5.895 GHz bands, we record the maximum level of 5.725-5.850 GHz and 5.850-5.895 GHz with RBW=1MHz, and the level complied with the 5.850-5.895 GHz EIRP PSD Limit.

802.11a Power Spectral Density - Ant 0


Channel 169 (5845MHz)

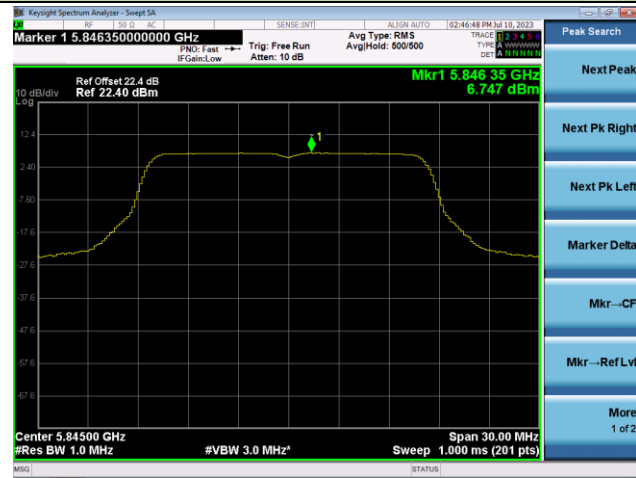

Channel 173 (5865MHz)

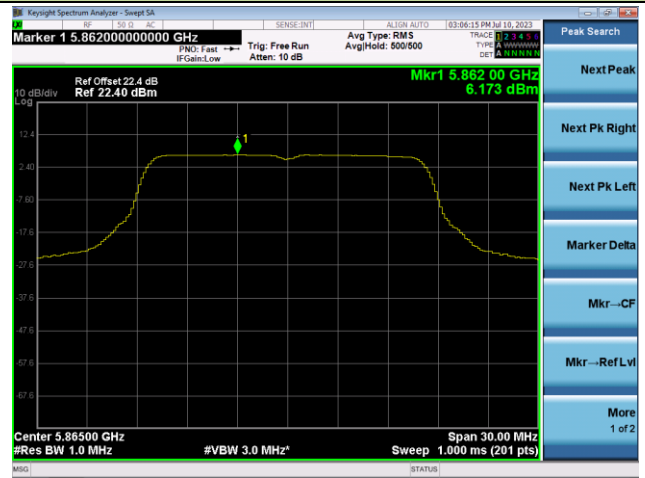


Channel 177 (5885MHz)

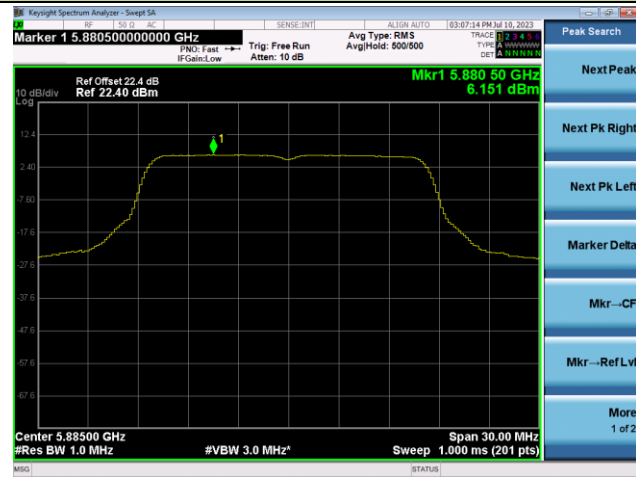


802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 169 (5845MHz)

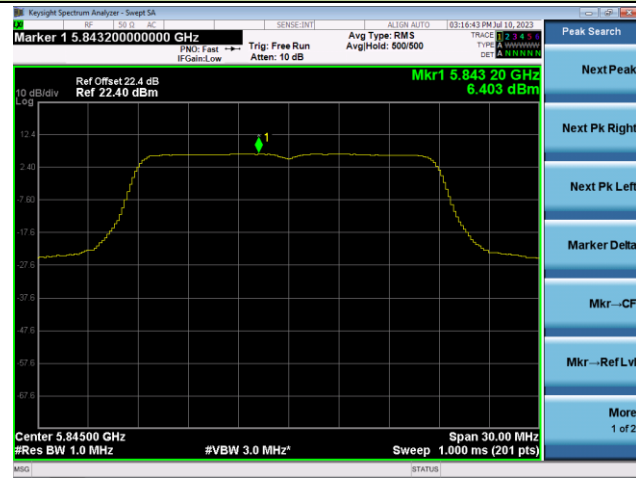

Channel 173 (5865MHz)

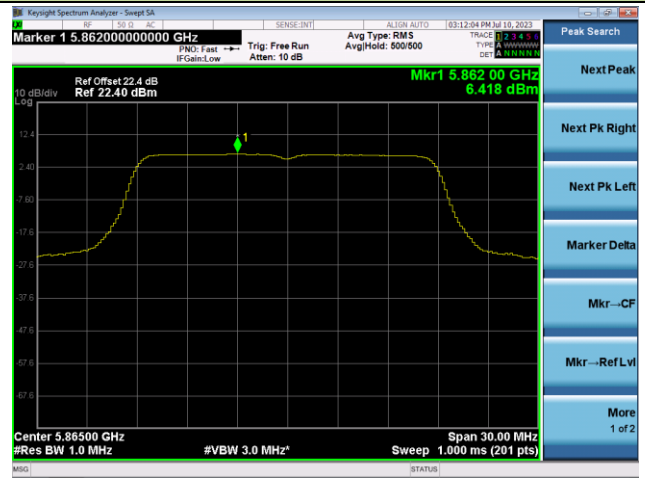


Channel 177 (5885MHz)

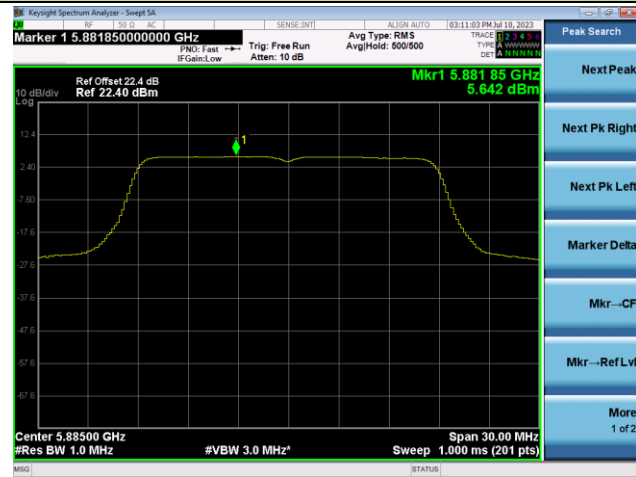


802.11ac-VHT40 Power Spectral Density - Ant 0

Channel 167 (5835MHz)

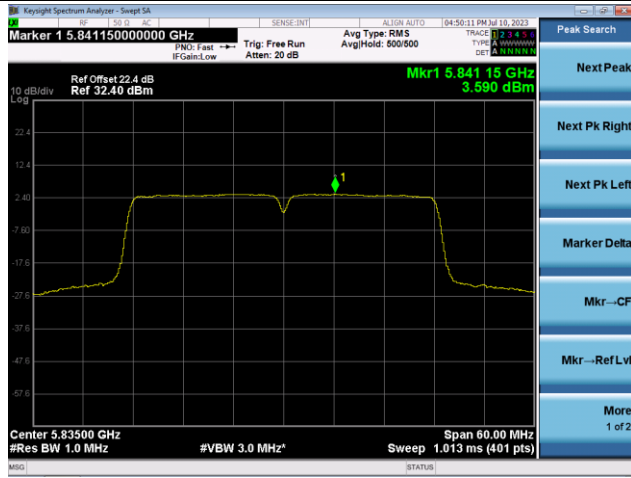


Channel 175 (5875MHz)

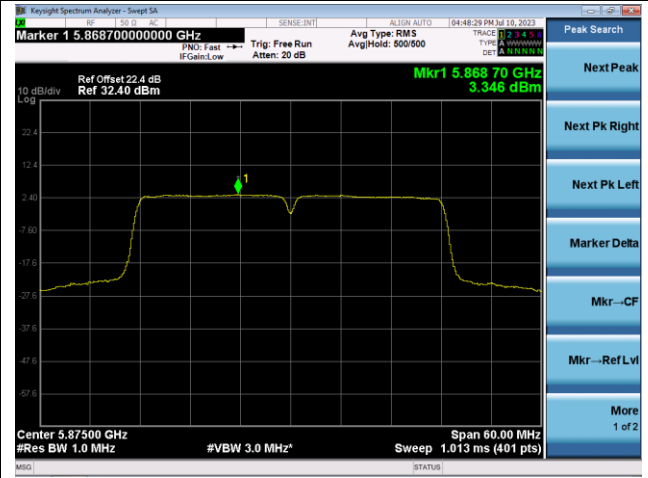

802.11ac-VHT80 Power Spectral Density - Ant 0

Channel 171 (5855MHz)

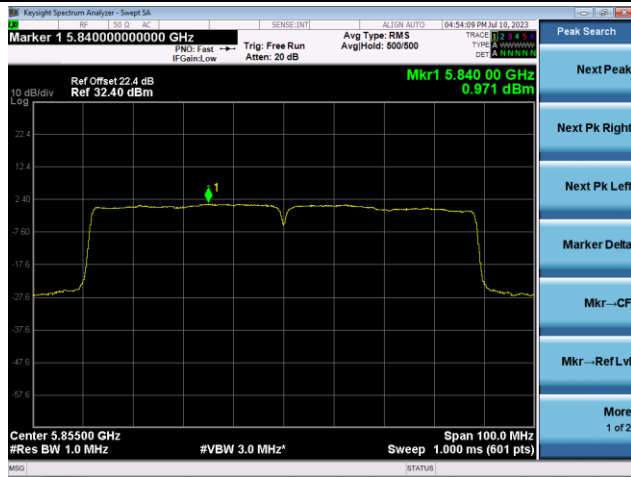


802.11ax-HE20 Power Spectral Density - Ant 0

Channel 169 (5845MHz)



Channel 173 (5865MHz)

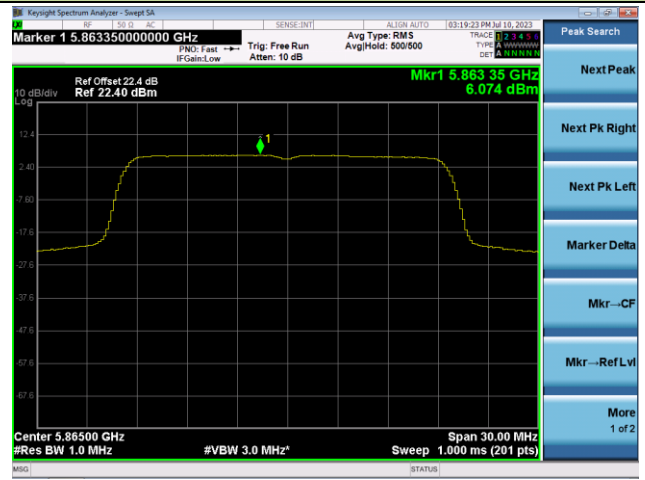

Channel 177 (5885MHz)

