


PART NUMBER BLOCK	
PART NUMBER	REV

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

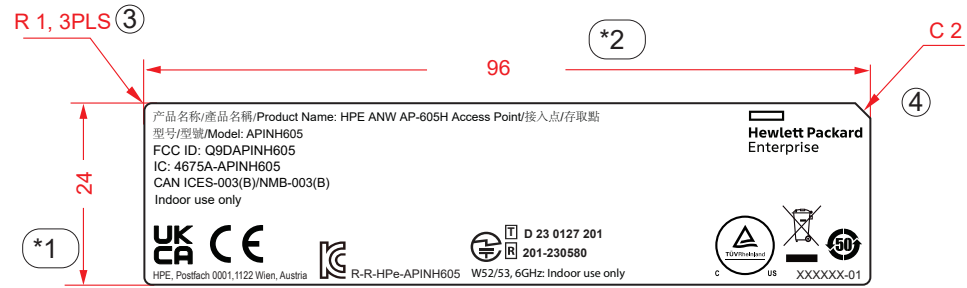

产品名称/产品名/Model: HPE ANW AP-605H Access Point/接入点/存取点
 型号/型號/Model: APINH605
 FCC ID: Q9DAPINH605
 IC: 4675A-APINH605
 CAN ICES-003(B)/NMB-003(B)
 Indoor use only

Hewlett Packard Enterprise

UL CPK CE R D 23 0127 201 201-230580 W52/53, 6GHz; Indoor use only

HPE, Postfach 0001,1122 Wien, Austria R-R-HPe-APINH605 XXXXXX-01

NOTES:

- MATERIAL: 50μ Polyester Film White Matt Label with Depressive Liner , 金利宝 HTYL 50(EB)-R2ZL
ADHESIVE: 网纹背胶
- COLOR:
 - COLOR OF BASE: WHITE
 - COLOR OF FONT: BLACK
- THICKNESS OF FACE STOCK: 0.052 ± 0.004
- THICKNESS OF ADHESIVE: 0.033 ± 0.003
- 卷状出货, 边距3±0.5mm, 跳距3±0.3mm
- UL Approved, PGJ12, CM-100T-030. 必须搭配碳带: Ricoh"B110A"/"B110CR"
- TEMPERATURE RESISTANT= 120°C.
- 原材粘着力(180°Peel Adhesion): ≥1.7kgf/25mm
- TEST REQUIREMENT:

TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5 % is affected.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE:			
INTEGRAL DIMENSIONS 1 PLACE DECIMAL	± 0.2 ± 0.2	ANGULAR DIMENSIONS ± 2°	HOLES UNDER φ 5.00 ± 0.2
MATERIAL: SEE NOTES			
FINISH: SEE NOTES			
THIRD ANGLE PROJECTION	DRAWN		
	ENGR		
	APVD		

WNC 啟碁科技股份有限公司	
Wistron NeWeb Corp. 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726	
DWG TITLE	
SIZE A4	DWG NO.
SCALE 1/1	SHEET 1 OF 1
REV 1	

NEXT ASSY	USED ON
APPLICATION	

