

Test of Aruba Networks APINR108, APINR109  
Wireless AP

To: FCC 47 CFR Part 15.247 & IC RSS-210

Test Report Serial No.: ARUB120-U1 Rev A



# TEST REPORT

FROM



Test of Aruba Networks APINR108, APINR109 Wireless AP

to

To FCC 47 CFR Part 15.247 & IC RSS-210

Test Report Serial No.: ARUB120-U1 Rev A

Note: this report contains data with regard to the 2400 to 2483.5 MHz and 5725 to 5850 MHz operational modes of the Aruba Networks APINR108, APINR109 Wireless Access Point. Test data for the 5,150 - 5,350 and 5,470 – 5,725 MHz is reported in MiCOM Labs test report ARUB120-U2

This report supersedes: NONE

Applicant: Aruba Networks  
1344 Crossman Avenue  
Sunnyvale  
California 94089, USA

Product Function: Wireless LAN Access Point

Copy No: pdf Issue Date: 28th November 2012

**This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**  
440 Boulder Court, Suite 200  
Pleasanton, CA 94566 USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



TEST CERTIFICATE #2381.01

**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 3 of 333

---

This page has been left intentionally blank



## TABLE OF CONTENTS

<b>ACCREDITATION, LISTINGS &amp; RECOGNITION .....</b>	<b>5</b>
TESTING ACCREDITATION .....	5
RECOGNITION .....	6
PRODUCT CERTIFICATION .....	7
<b>TEST RESULT CERTIFICATE .....</b>	<b>9</b>
<b>1. REFERENCES AND MEASUREMENT UNCERTAINTY .....</b>	<b>10</b>
1.1. Normative References .....	10
1.2. Test and Uncertainty Procedures .....	11
<b>2. PRODUCT DETAILS AND TEST CONFIGURATIONS .....</b>	<b>12</b>
2.1. Technical Details .....	12
2.2. Scope of Test Program .....	13
2.3. Equipment Model(s) and Serial Number(s) .....	17
2.4. Antenna Details .....	17
2.5. Cabling and I/O Ports .....	17
2.6. Test Configurations .....	18
2.7. Equipment Modifications .....	20
2.8. Deviations from the Test Standard .....	21
<b>3. TEST EQUIPMENT CONFIGURATION(S) .....</b>	<b>22</b>
3.1. Conducted RF Emission Test Set-up .....	22
3.2. Radiated Spurious Emission Test Set-up > 1 GHz .....	23
3.3. Digital Emissions Test Set-up (0.03 – 1 GHz) .....	24
3.4. ac Wireline Emission Test Set-up .....	25
<b>4. TEST SUMMARY .....</b>	<b>26</b>
<b>5. TEST RESULTS .....</b>	<b>28</b>
5.1. Device Characteristics .....	28
5.1.1. <i>Conducted Testing</i> .....	28
5.1.2. <i>Radiated Emission Testing</i> .....	59
5.1.3. <i>AC Wireline Conducted Emissions (150 kHz – 30 MHz)</i> .....	132
<b>6. PHOTOGRAPHS .....</b>	<b>134</b>
6.1. Test Setup - Digital Emissions below 1 GHz .....	134
6.2. Radiated Emissions Test Setup >1 GHz – ANT-19 .....	135
<b>7. TEST EQUIPMENT .....</b>	<b>136</b>
<b>APPENDIX .....</b>	<b>137</b>
<b>A. SUPPORTING INFORMATION .....</b>	<b>137</b>
A.1. CONDUCTED TEST PLOTS .....	137
A.1.1. <i>6 dB &amp; 99% Bandwidth</i> .....	138
A.1.2. <i>Peak Output Power</i> .....	184
A.1.3. <i>Power Spectral Density</i> .....	225
A.1.4. <i>Conducted Spurious Emissions</i> .....	265

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## ACCREDITATION, LISTINGS & RECOGNITION

### TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 6 of 333

## **RECOGNITION**

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA\*\* countries. Our test reports are widely accepted for global type approvals.

<b>Country</b>	<b>Recognition Body</b>	<b>Status</b>	<b>Phase</b>	<b>Identification No.</b>
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

\*\*APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

\*\*EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

\*\*NB – Notified Body

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 7 of 333

## **PRODUCT CERTIFICATION**

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard EN ISO/IEC Guide 65. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



### **United States of America – Telecommunication Certification Body (TCB)**

TCB Identifier – US0159

### **Industry Canada – Certification Body**

CAB Identifier – US0159

### **Europe – Notified Body**

Notified Body Identifier - 2280

### **Japan – Recognized Certification Body (RCB)**

RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 8 of 333

---

## DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	28 <sup>th</sup> November 2012	Initial release.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 9 of 333

## **TEST RESULT CERTIFICATE**

Manufacturer:	Aruba Networks 1344 Crossman Avenue Sunnyvale California 94089, USA	Tested By:	MiCOM Labs, Inc. 440 Boulder Court Suite 200 Pleasanton California, 94566, USA
EUT:	802.11a/b/g/n Wireless LAN Access Point	Telephone:	+1 925 462 0304
Model:	APINR108, APINR109	Fax:	+1 925 462 0306
S/N's:	BV0000142		
Test Date(s):	1st to 31st October'12	Website:	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 15.247 & IC RSS-210	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

### **Notes:**

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

**Approved & Released for MiCOM Labs, Inc. by:**



TEST CERTIFICATE #2381.01

  
\_\_\_\_\_  
Graeme Grieve  
Quality Manager MiCOM Labs,

  
\_\_\_\_\_  
Gordon Hurst  
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 1. REFERENCES AND MEASUREMENT UNCERTAINTY

### 1.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
i.	FCC 47 CFR Part 15, Subpart C	2010	Title 47: Telecommunication PART 15—RADIO FREQUENCY DEVICES Subpart C—Intentional Radiators
ii.	RSS-210 Annex 8	2010	Radio Standards Specification 210, Issue 8, Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment
iii.	FCC OET KDB 662911	4 <sup>th</sup> April 2011	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
iv.	DA 00-705	2000	FCC DA 00-705 "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems" released March 30, 2000
v.	RSS-GEN	2010	Radio Standards Specification-Gen, Issue 3, General Requirements and Information for the Certification of Radiocommunication Equipment
vi.	FCC 47 CFR Part 15, Subpart B	2010	47 CFR Part 15, SubPart B; Unintentional Radiators
vii.	ICES-003	2004	Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard Digital Apparatus; Issue 4
viii.	ANSI C63.4	2009	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ix.	CISPR 22/ EN 55022	2008 2006+A1:2007	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
x.	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
xi.	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
xii.	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
xiii.	A2LA	July 2012	Reference to A2LA Accreditation Status – A2LA Advertising Policy

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 11 of 333

---

## 1.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 12 of 333

## 2. PRODUCT DETAILS AND TEST CONFIGURATIONS

### 2.1. Technical Details

Details	Description
Purpose:	Test of the Aruba Networks APINR108, APINR109 Wireless AP to FCC Part 15.247 and Industry Canada RSS-210 regulations.
Applicant:	Aruba Networks 1344 Crossman Avenue Sunnyvale California 94089, USA
Manufacturer:	As applicant.
Laboratory performing the tests:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA
Test report reference number:	ARUB120-U1 Rev A
Date EUT received:	1 <sup>st</sup> October 2012
Standard(s) applied:	FCC 47 CFR Part 15.247 & IC RSS-210
Dates of test (from - to):	1st to 31st October'12
No of Units Tested:	One
Type of Equipment:	802.11a/b/g/n Wireless Access Point, 2x2 Spatial Multiplexing MIMO configuration
Manufacturers Trade Name:	Wireless Access Point
Model(s):	APINR108, APINR109
Location for use:	Indoor only
Declared Frequency Range(s):	2400 - 2483.5 MHz; 5725 - 5850 MHz
Hardware Rev	R0D
Software Rev	AOS 6.2
Type of Modulation:	Per 802.11 –CCK, BPSK, QPSK, DSSS, OFDM
Declared Nominal Average Output Power:	802.11b: +18 dBm 802.11g: Leg. +18dBm, HT-20 +18 dBm, HT-40 +18 dBm 802.11a: Leg. +18dBm, HT-20 +18 dBm, HT-40 +18 dBm
EUT Modes of Operation:	Legacy 802.11a/b/g, 802.11n HT-20, HT-40
Transmit/Receive Operation:	Time Division Duplex
System Beam Forming:	APINR108, APINR109 has no capability for antenna beam forming
Rated Input Voltage and Current:	POE 12 Vdc 1.25 A
Operating Temperature Range:	Declared range 0° to +40°.
ITU Emission Designator:	2400 – 2483.5 MHz 802.11b 14M0G1D 2400 – 2483.5 MHz 802.11g 16M7D1D 2400 – 2483.5 MHz 802.11n – HT-20 17M8D1D 2400 – 2483.5 MHz 802.11n – HT-40 36M6D1D 5725 – 5850 MHz 802.11a 16M7D1D 5725 – 5850 MHz 802.11n – HT-20 17M9D1D 5725 – 5850 MHz 802.11n – HT-40 36M3D1D
Equipment Dimensions:	170mm x 170mm x 40mm
Weight:	385 g
Primary function of equipment:	Wireless Access Point for transmitting data and voice.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 13 of 333

---

## 2.2. Scope of Test Program

### **Aruba Networks APINR108, APINR109 Wireless Access Point**

The scope of the test program was to test the Aruba Networks APINR108, APINR109 Wireless AP, 2x2 Spatial Multiplexing MIMO configurations in the frequency ranges 2400 - 2483.5 MHz and 5725 – 5850 MHz for compliance against FCC 47 CFR Part 15.247 and Industry Canada RSS-210 specifications.

### **FCC OET KDB Implementation**

This test program implements the following FCC KDB – 662911 4/4/2011;

### ***Emissions Testing of Transmitters with Multiple Outputs in the Same Band***

The KDB document provides guidance for measurements of conducted output emissions of devices that employ a single transmitter with multiple outputs in the same band, with the outputs occupying the same or overlapping frequency ranges. It applies to EMC compliance measurements on devices that transmit on multiple antennas simultaneously in the same or overlapping frequency ranges through a coordinated process. Examples include, but are not limited to, devices employing beam forming or multiple-input and multiple-output (MIMO.) This guidance applies to both licensed and unlicensed devices wherever the FCC rules call for conducted output measurements. Guidance is provided for in-band, out-of-band and spurious emission measurements.

This guidance does not apply to the multiple transmitters included in a composite device, such as a device that combines an 802.11 modem with a cell phone in one enclosure with each driving its own antenna.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### APINR108 Wireless LAN Access Point



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### APINR109 Wireless LAN Access Point



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**APINR108, APINR109 Wireless LAN Access Point (Rear)**



**APINR108, APINR109 Wireless LAN  
Access Point Label**

Device has an electronic label





### 2.3. Equipment Model(s) and Serial Number(s)

Equipment Type	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	802.11a/b/g/n WLAN	Aruba Networks	APINR108, APINR109	BV0000142
Support	Laptop PC	IBM	Thinkpad	None

### 2.4. Antenna Details

Model	Type	Gain (dBi)	Freq. Band (MHz)	Note
AP-ANT-1B	Omni	3.8	2400 - 2500	(3x per unit)
		5.8	4900 - 5875	
AP-ANT-13B	Omni	4.4	2400 - 2500	(3x per unit)
		3.3	4900 - 5900	
AP-ANT-16	Omni	3.9	2400 - 2500	(1x per unit) 3x3 MIMO
		4.7	4900 - 5900	
AP-ANT-17	Directional 120degr.	6.0	2400 - 2500	(1x per unit) 3x3 MIMO
		5.0	4900 - 5875	
AP-ANT-18	Directional 60degr.	7.0	2400 - 2500	(1x per unit) 3x3 MIMO
		7.5	5150 - 5875	
AP-ANT-19	Omni	3.0	2400 - 2500	(3 x per unit)
		6.0	5150 - 5875	

### 2.5. Cabling and I/O Ports

Number and type of I/O ports

Port Type	Port Description	Qty	Screened (Yes/ No)	Length
Ethernet	Ethernet PoE	1	NO	> 10m
Ethernet	Ethernet	1	NO	3m-10m
Serial RS 323 (RJ45)	Serial Console	1	NO	1m-3m
USB	USB port	1	NO	1m-3m

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## 2.6. Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Operational Mode(s) (802.11a/b/g/n)	Variant	Data Rate with Highest Power	Frequencies (MHz)
b	Legacy	1 MBit/s	2,412
g	Legacy	6 MBit/s	2,437
n	HT-20	6.5 (MCS 0)	2,462
	HT-40	13.5 (MCS 0)	2,422 2,437 2,452
a	Legacy	6 MBit/s	5,745
n	HT-20	6.5 (MCS 0)	5,785
	HT-40	13.5 (MCS 0)	5,825 5,755 5,795

Legacy – data rates for 802.11abg products

Results for the above configurations are provided in this report



### Antenna Test Configurations for Radiated Emissions

Results for the following configurations are provided in this report.

Radiated emissions testing was performed for three different antennas that represent the highest gain for each antenna type intended for use with the EUT;- Integral antenna (As used in APINR109) ; ANT-18 60 degree sector antenna; ANT-19 monopole antenna.

Radiated emissions testing was performed for all possible configurations for antenna ANT-18 which is the highest gain antenna used with the equipment. Radiated emissions testing was performed for the other two antennas in worst case mode (mode with the highest spectral density)

2,400 – 2483.5 MHz

5,725 – 5850 MHz

15.247	
802.11b	b SE 2412
	b SE 2437
	b SE 2462
	BE b 2390
	BE b 2483.5
802.11g	g SE 2412
	g SE 2437
	g SE 2462
	BE g 2390
	BE g 2483.5
802.11n HT-20	n HT-20 SE 2412
	n HT-20 SE 2437
	n HT-20 SE 2462
	BE n HT-20 2390
	BE n HT-20 2483.5
802.11n HT-40	n HT-40 SE 2422
	n HT-40 SE 2437
	n HT-40 SE 2452
	BE n HT-40 2390
	BE n HT-40 2483.5

15.247	
802.11a	a SE 5745
	a SE 5785
	a SE 5825
802.11n HT-20	n HT-20 SE 5745
	n HT-20 SE 5785
	n HT-20 SE 5825
802.11n HT-40	n HT-40 SE 5755
	n HT-40 SE 5795

KEY;-

SE – Spurious Emission  
BE – Band-Edge

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## 2.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

### 1. Band-Edge Power Reduction

All conducted and radiated spurious emission testing was performed with the device set for maximum power at all times. During radiated band-edge emission testing the output power was reduced in order to comply with the Restricted Band limit criteria. At 2.4 GHz restricted bands are 2,310 – 2,390 MHz and 2,483.5 – 2,500 MHz.

Section 5.1.1.2 Peak Output Power identifies the total conducted power levels measured per antenna port and sums the powers when the device was set for transmitting maximum power. Further the power tables reported in Section 5.1.1.2 reflect the power on a per chain basis for each antenna identified in Section 2.4 Antenna Details along with the power reduction are identified below.

Note: the power setting for the mid channel is maximum setting at all times.

		Integral Antenna	ANT-18	ANT-19
Channel (MHz)		Maximum Power Level		
2.4 GHz	b	2412	18	18
		2437	18	18
		2462	18	18
	g	2412	18	18
		2437	18	18
		2462	18	18
	HT-20	2412	18	18
		2437	18	18
		2462	17.5	17.5
	HT-40	2422	15	15
		2437	18	18
		2452	15.5	15.5
5.8 GHz	a	5745	18	18
		5785	18	18
		5825	18	18
	HT-20	5745	18	18
		5785	18	18
		5825	18	18
	HT-40	5755	18	18
		5795	18	18



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 21 of 333

---

## **2.8. Deviations from the Test Standard**

The following deviations from the test standard were required in order to complete the test program:

1. NONE

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 3. TEST EQUIPMENT CONFIGURATION(S)


#### 3.1. Conducted RF Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.1.1. 6 dB and 99% Bandwidth
2. Section 6.1.1.2. Peak Output Power
3. Section 6.1.1.3. Power Spectral Density
4. Section 6.1.1.4. Conducted Spurious Emissions

#### Conducted Test Set-Up Pictorial Representation

3 - Port Test Configuration

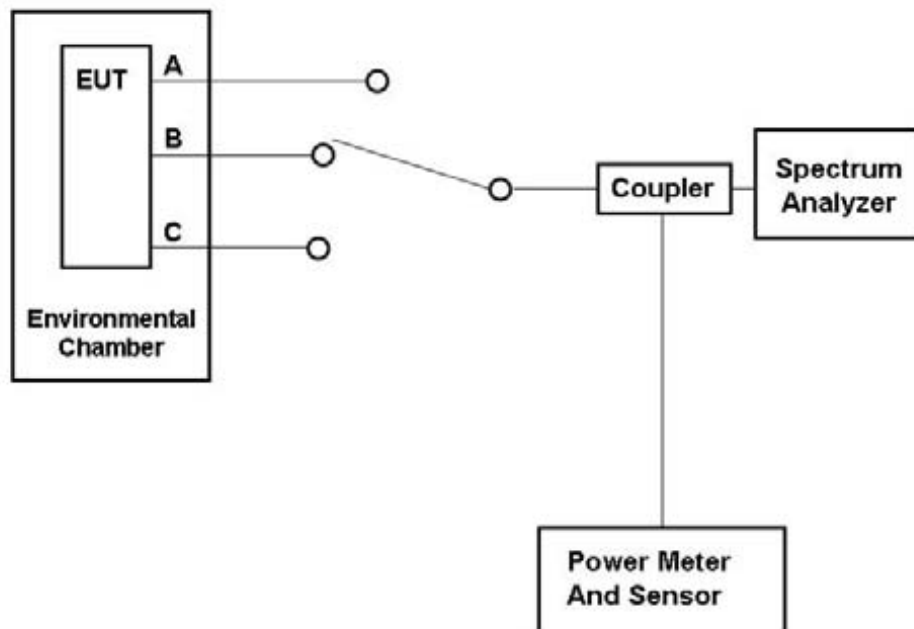


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 3.2. Radiated Spurious Emission Test Set-up > 1 GHz

The following tests were performed using the conducted test set-up shown in the diagram below.

#### Radiated Emission Measurement Setup – Above 1 GHz

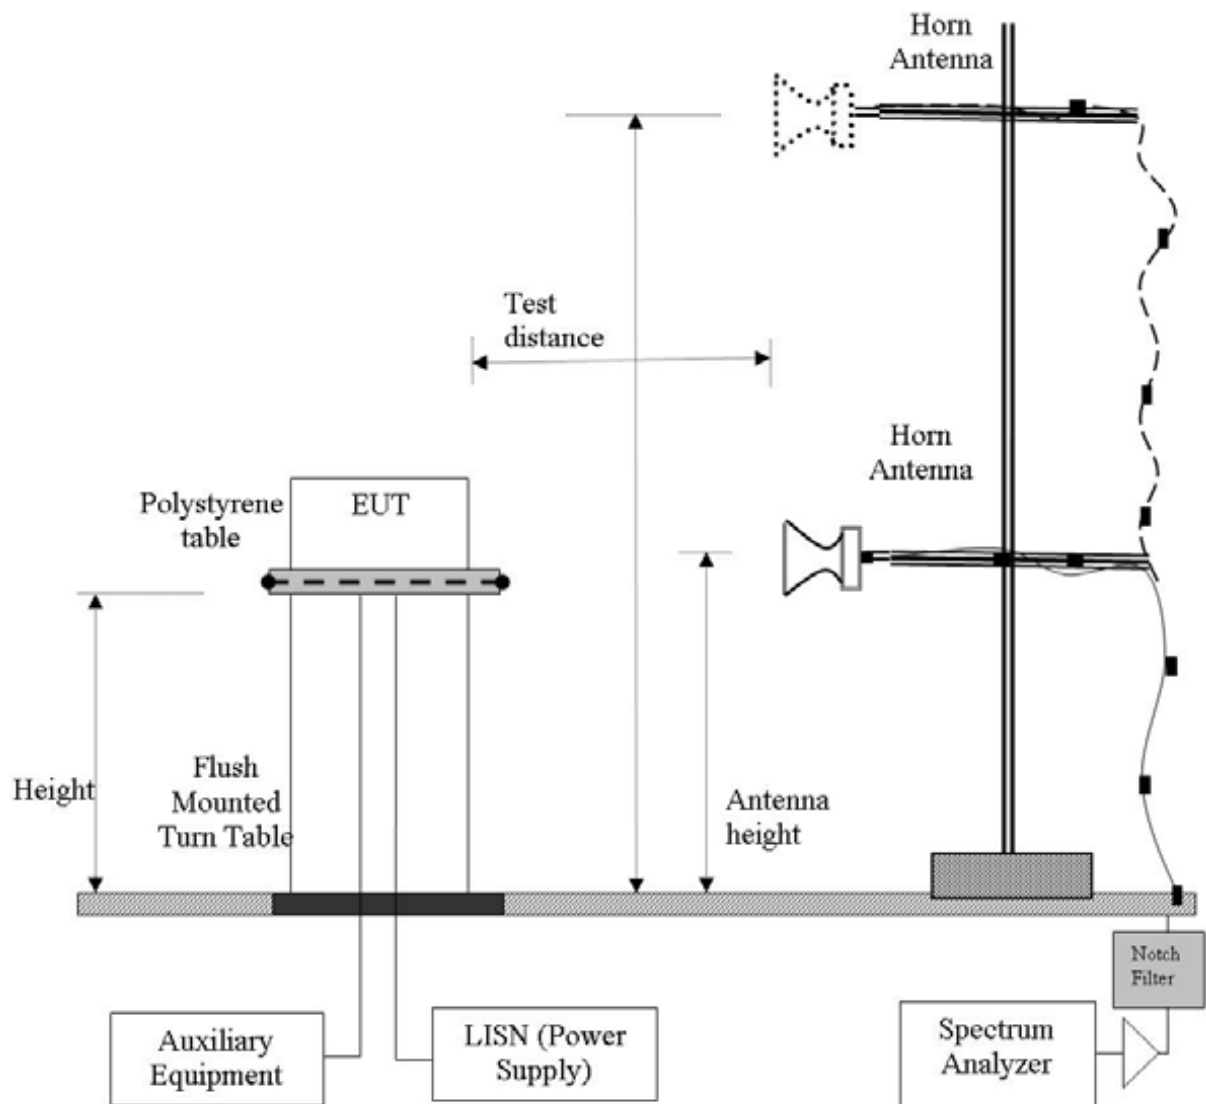


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 3.3. Digital Emissions Test Set-up (0.03 – 1 GHz)

The following tests were performed using the conducted test set-up shown in the diagram below.

#### Digital Emission Measurement Setup – Below 1 GHz

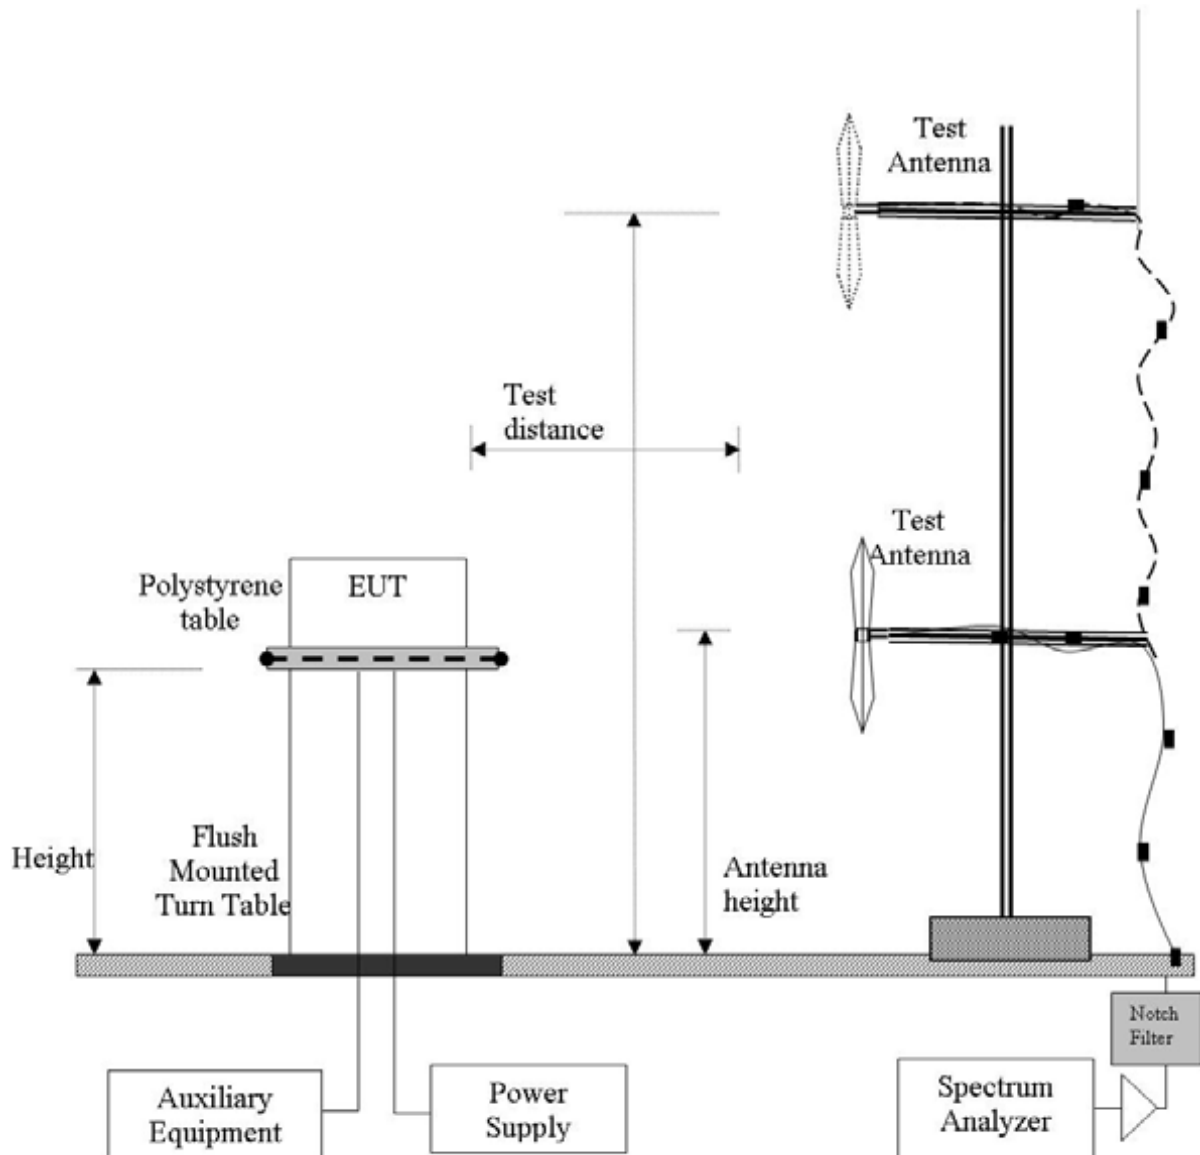

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




### 3.4. ac Wireline Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 5.1.3 ac Wireline Conducted Emissions

#### Conducted Test Set-Up Pictorial Representation

3 - Port Test Configuration

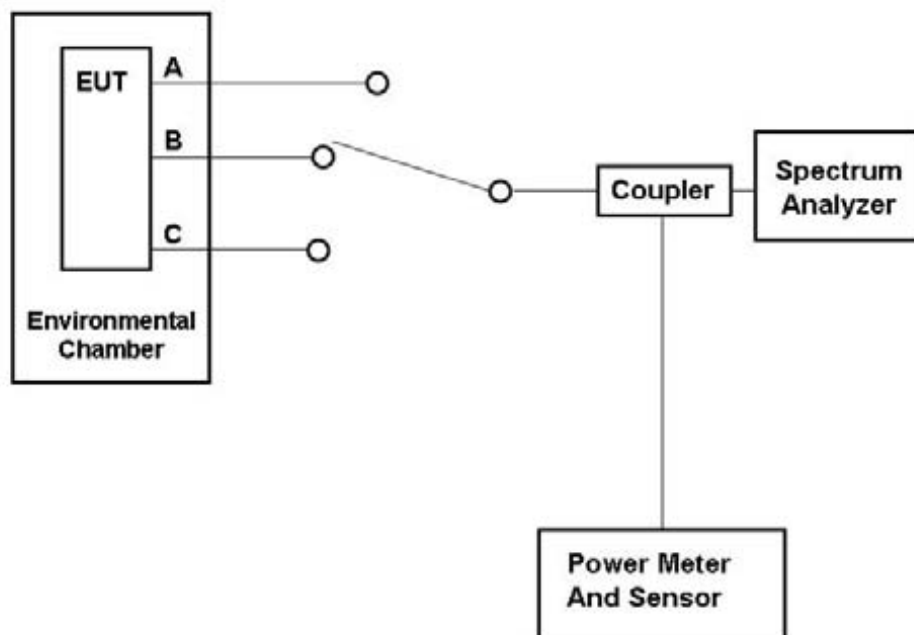

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## 4. TEST SUMMARY

### List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.247** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.247(a)(2) A8.2(1) 4.4	6 dB and 99 % Bandwidths	≥500 kHz	Conducted	Complies	5.1.1.1
15.247(b)(3) 15.31(e) A8.4(4)	Peak Output Power Voltage Variation	Shall not exceed 1W  Variation of supply voltage 85 % -115 %	Conducted	Complies	5.1.1.2
15.247(e) A8.2	Peak Power Spectral Density	Shall not be greater than +8 dBm in any 3 kHz band	Conducted	Complies	5.1.1.3
15.247(d) 15.205 / 15.209 A8.5 2.2 4.7	Spurious Emissions (30MHz - 26 GHz b/g and 30 MHz – 40 GHz a)	The radiated emission in any 100 kHz of out-band shall be at least 20 dB below the highest in-band spectral density	Conducted	Complies	5.1.1.4

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**List of Measurements (continued)**

The following table represents the list of measurements required under the **FCC CFR47 Part 15.247**, **Industry Canada RSS-210**, and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.247(d) 15.205 / 15.209 A8.5 2.2 2.6 4.7	Radiated Emissions	Restricted Bands	Radiated	Complies	5.1.2
	Transmitter Radiated Spurious Emissions	Emissions above 1 GHz		Complies	
	Radiated Band Edge	Band-edge results Peak Emissions		Complies	
15.205 / 15.209 2.2	Radiated Spurious Emissions	Emissions <1 GHz (30M-1 GHz)	Radiated	Complies	5.1.2.4
15.207 7.2.2	AC Wireline Conducted Emissions 150 kHz–30 MHz	Conducted Emissions	Conducted	N/A EUT is POE powered - not shipped with equipment	5.1.3

**Note 1:** Test results reported in this document relate only to the items tested

**Note 2:** The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

**Note 3:** Section 3.7 Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 28 of 333

## 5. TEST RESULTS

### 5.1. Device Characteristics

#### 5.1.1. Conducted Testing

##### 5.1.1.1. 6 dB and 99 % Bandwidth

<b>Conducted Test Conditions for 6 dB and 99% Bandwidth</b>			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	6 dB and 99 % Bandwidth	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (a)(2)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	KDB 558074 - D01 DTS Measurement Guidance v01: Section 5.1 Emission Bandwidth		
<b>Test Procedure for 6 dB and 99% Bandwidth Measurement</b> The bandwidth at 6 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate centre frequency.			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 29 of 333

**Equipment Configuration for 6 dB 99%**

<b>Variant:</b>	802.11b	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	1 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	CCK	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency MHz	Measured 6 dB Bandwidth (MHz) Port(s)				6 dB Bandwidth (MHz)		Limit MHz	Lowest Margin MHz
	a	b	c	d	Highest	Lowest		
2412.0	10.180	10.180			10.180	10.180	≥ 0.5	-9.68
2437.0	10.180	10.180			10.180	10.180	≥ 0.5	-9.68
2462.0	10.180	10.180			10.180	10.180	≥ 0.5	-9.68

Test Frequency MHz	Measured 99% Bandwidth (MHz) Port(s)				Maximum 99% Bandwidth (MHz)		
	a	b	c	d			
2412.0	13.868	13.948			13.948		
2437.0	13.948	13.948			13.948		
2462.0	13.868	13.868			13.868		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 Measuring RF Spectrum Mask
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 30 of 333

**Equipment Configuration for 6 dB 99%**

<b>Variant:</b>	802.11g	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency MHz	Measured 6 dB Bandwidth (MHz) Port(s)				6 dB Bandwidth (MHz)		Limit MHz	Lowest Margin MHz
	a	b	c	d	Highest	Lowest		
2412.0	16.353	16.433			16.433	16.353	≥ 0.5	-15.85
2437.0	16.433	16.433			16.433	16.433	≥ 0.5	-15.93
2462.0	16.433	16.433			16.433	16.433	≥ 0.5	-15.93

Test Frequency MHz	Measured 99% Bandwidth (MHz) Port(s)				Maximum 99% Bandwidth (MHz)		
	a	b	c	d			
2412.0	16.593	16.673			16.673		
2437.0	16.513	16.513			16.513		
2462.0	16.593	16.513			16.593		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 Measuring RF Spectrum Mask
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 31 of 333

**Equipment Configuration for 6 dB 99%**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

Test Measurement Results								
Test Frequency	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d	MHz	MHz	MHz	MHz
2412.0	17.234	17.234			17.234	17.234	≥ 0.5	-16.73
2437.0	17.395	17.635			17.635	17.395	≥ 0.5	-16.90
2462.0	17.395	17.395			17.395	17.395	≥ 0.5	-16.90

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
2412.0	17.715	17.796			17.796		
2437.0	17.715	17.796			17.796		
2462.0	17.715	17.715			17.715		

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 32 of 333

**Equipment Configuration for 6 dB 99%**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency MHz	Measured 6 dB Bandwidth (MHz)				6 dB Bandwidth (MHz)		Limit MHz	Lowest Margin MHz
	Port(s)				Highest	Lowest		
	a	b	c	d				
2422.0	36.553	36.553			36.553	36.553	≥ 0.5	-36.05
2437.0	36.553	36.553			36.553	36.553	≥ 0.5	-36.05
2452.0	36.232	36.553			36.553	36.232	≥ 0.5	-35.73

Test Frequency MHz	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
	a	b	c	d			
2422.0	36.393	36.393			36.393		
2437.0	36.393	36.393			36.393		
2452.0	36.553	36.393			36.553		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 Measuring RF Spectrum Mask
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 33 of 333

**Equipment Configuration for 6 dB 99%**

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6 MBits	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency MHz	Measured 6 dB Bandwidth (MHz) Port(s)				6 dB Bandwidth (MHz)		Limit MHz	Lowest Margin MHz
	a	b	c	d	Highest	Lowest		
5745.0	16.593	16.433			16.593	16.433	≥ 0.5	-15.93
5785.0	16.433	16.433			16.433	16.433	≥ 0.5	-15.93
5825.0	16.433	16.433			16.433	16.433	≥ 0.5	-15.93

Test Frequency MHz	Measured 99% Bandwidth (MHz) Port(s)				Maximum 99% Bandwidth (MHz)		
	a	b	c	d			
5745.0	16.513	16.513			16.513		
5785.0	16.673	16.513			16.673		
5825.0	16.673	16.513			16.673		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 Measuring RF Spectrum Mask
Measurement Uncertainty:	±2.81 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 34 of 333

**Equipment Configuration for 6 dB 99%**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency MHz	Measured 6 dB Bandwidth (MHz) Port(s)				6 dB Bandwidth (MHz)		Limit MHz	Lowest Margin MHz
	a	b	c	d	Highest	Lowest		
5745.0	17.475	17.555			17.555	17.475	≥ 0.5	-16.98
5785.0	17.715	17.395			17.715	17.395	≥ 0.5	-16.90
5825.0	17.635	17.635			17.635	17.635	≥ 0.5	-17.14

Test Frequency MHz	Measured 99% Bandwidth (MHz) Port(s)				Maximum 99% Bandwidth (MHz)		
	a	b	c	d			
5745.0	17.715	17.635			17.715		
5785.0	17.796	17.635			17.796		
5825.0	17.876	17.635			17.876		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 Measuring RF Spectrum Mask
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 35 of 333

**Equipment Configuration for 6 dB 99%**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency MHz	Measured 6 dB Bandwidth (MHz) Port(s)				6 dB Bandwidth (MHz)		Limit MHz	Lowest Margin MHz
	a	b	c	d	Highest	Lowest		
5755.0	36.232	36.553			36.553	36.232	≥ 0.5	-35.73
5795.0	36.553	36.553			36.553	36.553	≥ 0.5	-36.05

Test Frequency MHz	Measured 99% Bandwidth (MHz) Port(s)				Maximum 99% Bandwidth (MHz)		
	a	b	c	d			
5755.0	36.232	36.232			36.232		
5795.0	36.232	36.232			36.232		

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-03 Measuring RF Spectrum Mask
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 36 of 333

---

## Specification

### Limits

#### **§15.247 (a)(2) & RSS-210 §A8.2(1)**

The minimum 6 dB bandwidth shall be at least 500 kHz.

**§ IC RSS-Gen 4.4.1 Occupied Bandwidth** When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

**§ IC RSS-Gen 4.4.2 6 dB Bandwidth** Where indicated, the 6 dB bandwidth is measured at the points when the spectral density of the signal is 6 dB down from the in-band spectral density of the modulated signal, with the transmitter modulated by a representative signal.

### Traceability

Test Equipment Used
---------------------

0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117
--

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 37 of 333

### 5.1.1.2. Peak Output Power

Conducted Test Conditions for Fundamental Emission Output Power			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Emission Output Power	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (a)(2)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	KDB 558074 - D01 DTS Measurement Guidance v01: Section 5.2 Fundamental Emission Output Power KDB 662911 was implemented for In-band power measurements. The measure and sum technique was implemented in all cases.		

#### Test Procedure for Fundamental Emission Output Power Measurement

The transmitter terminal of EUT was connected to the input of the spectrum analyzer set to measure peak power. The resolution filter bandwidth was set to 6 dB, peak detector selected and the analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth.

#### Supporting Information

Calculated Power = A + G + 10 log (1/x) dBm

A = Total Power [10 Log<sub>10</sub> (10<sup>a/10</sup> + 10<sup>b/10</sup> + 10<sup>c/10</sup> + 10<sup>d/10</sup>)], G = Antenna Gain,

x = Duty Cycle

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



15.247 (c) Operation with directional antenna gains greater than 6 dBi.  
 If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**Uncorrelated Operation**

**2.4 GHz Uncorrelated Operation (MIMO)**

Antenna (dB)	Gain (dBi)	Max. Allowable Conducted Peak Power (dBm)		Maximum EIRP (dBm)
		Uncorrelated	Max. Power Per Chain	
Integral	3.0	+30.0	+26.99	+33.0
ANT-18	7.0	+29.0	+25.99	+36.0
ANT-19	3.0	+30.0	+26.99	+33.0

**5.8 GHz Uncorrelated Operation (MIMO)**

Antenna (dB)	Gain (dBi)	Max. Allowable Conducted Peak Power (dBm)		Maximum EIRP (dBm)
		Uncorrelated	Max. Power Per Chain	
Integral	3.0	+30.0	+27.00	+33.0
ANT-18	7.5	+28.5	+25.50	+36.0
ANT-19	6.0	+30.0	+27.00	+33.0

**Correlated Operation**

**2.4 GHz Correlated Operation (Non-MIMO i.e. Legacy)**

Antenna (dB)	Gain dBi	Antenna Gain Increase V's No. Antenna Ports		Total Gain dBi	Max. Allowable Conducted Peak Power $\Sigma$ (dBm)	Maximum EIRP (dBm)
		Ports	dB			
Integral	3.0	2	3.01	6.01	+26.99	+33.0
ANT-18	7.0	2	3.01	10.01	+25.99	+36.0
ANT-19	3.0	2	3.01	6.01	+26.99	+33.0

**5.8 GHz Correlated Operation (Non-MIMO i.e. Legacy)**

Antenna (dB)	Gain dBi	Antenna Gain Increase V's No. Antenna Ports		Total Gain dBi	Max. Allowable Conducted Peak Power $\Sigma$ (dBm)	Maximum EIRP (dBm)
		Ports	dB			
Integral	3.0	2	3.01	6.01	+29.99	+36.0
ANT-18	7.5	2	3.01	10.51	+25.49	+36.0
ANT-19	6.0	2	3.01	9.01	+26.99	+36.0

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 39 of 333

**Equipment Configuration for peak output power**

<b>Variant:</b>	802.11b	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	1 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	CCK	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Output Power (dBm)				Calculated Total Power (dBm)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	Σ Port(s)	dBm	dBm	
2412.0	20.81	20.69			23.76	30.00	-6.24	
2437.0	19.71	20.01			22.87	30.00	-7.13	
2462.0	20.23	20.39			23.32	30.00	-6.68	

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 Measuring RF Output Power
Measurement Uncertainty:	±1.33 dB

**Equipment Configuration for peak output power**

<b>Variant:</b>	802.11g	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6 MBits	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Output Power (dBm)				Calculated Total Power (dBm)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	Σ Port(s)	dBm	dBm	
2412.0	26.45	26.89			29.69	30.00	-0.31	
2437.0	25.42	26.20			28.84	30.00	-1.16	
2462.0	25.84	26.51			29.20	30.00	-0.80	

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 Measuring RF Output Power
Measurement Uncertainty:	±1.33 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 40 of 333

**Equipment Configuration for peak output power**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Output Power (dBm)				Calculated Total Power (dBm)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	Σ Port(s)	dBm	dBm	
2412.0	26.28	26.10			29.20	30.00	-0.80	
2437.0	25.49	25.39			28.45	30.00	-1.55	
2462.0	25.72	25.73			28.74	30.00	-1.26	

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 Measuring RF Output Power
Measurement Uncertainty:	±1.33 dB

**Equipment Configuration for peak output power**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Output Power (dBm)				Calculated Total Power (dBm)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	Σ Port(s)	dBm	dBm	
2422.0	26.60	26.49			29.56	30.00	-0.44	
2437.0	26.37	26.51			29.45	30.00	-0.55	
2452.0	25.84	25.74			28.80	30.00	-1.20	

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 Measuring RF Output Power
Measurement Uncertainty:	±1.33 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 41 of 333

**Equipment Configuration for peak output power**

<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Output Power (dBm)				Calculated Total Power (dBm)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	Σ Port(s)	dBm	dBm	
5745.0	22.60	21.46			25.08	30.00	-4.92	
5785.0	24.59	23.57			27.12	30.00	-2.88	
5825.0	24.80	24.04			27.45	30.00	-2.55	

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 Measuring RF Output Power
Measurement Uncertainty:	±1.33 dB

**Equipment Configuration for peak output power**

<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Output Power (dBm)				Calculated Total Power (dBm)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	Σ Port(s)	dBm	dBm	
5745.0	24.66	22.43			26.70	30.00	-3.30	
5785.0	24.29	22.76			26.60	30.00	-3.40	
5825.0	24.52	22.97			26.82	30.00	-3.18	

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 Measuring RF Output Power
Measurement Uncertainty:	±1.33 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 42 of 333

**Equipment Configuration for peak output power**

<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	100
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	Not Applicable
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	Not Applicable
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

**Test Measurement Results**

Test Frequency	Measured Output Power (dBm)				Calculated Total Power (dBm)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	$\Sigma$ Port(s)	dBm	dBm	
5755.0	24.93	22.67			26.96	30.00	-3.04	
5795.0	24.51	22.57			26.66	30.00	-3.34	

**Traceability to Industry Recognized Test Methodologies**

Work Instruction:	WI-01 Measuring RF Output Power
Measurement Uncertainty:	$\pm 1.33$ dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## Specification

### Limits

**§15.247 (b)** The maximum peak output power of the intentional radiator shall not exceed the following:

**§15.247 (b) (3)** For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1.0 watt.

**15.247 (b) (4)** The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

15.247 (c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

**§15.31 (e)** For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

**§ RSS-210 A8.4(4)** For systems employing digital modulation techniques operating in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands the maximum peak conducted power shall not exceed 1 watt.

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 44 of 333

### 5.1.1.3. Power Spectral Density

Conducted Test Conditions for Power Spectral Density			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Power Spectral Density	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (e)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	KDB 558074 - D01 DTS Measurement Guidance v01: Section 5.3 Maximum Power Spectral Density Level in the Emission Bandwidth		
<b>Test Procedure for Power Spectral Density</b> The transmitter output was connected to a spectrum analyzer and the maximum level in a 3 kHz bandwidth was measured. A peak value was found over the full emission bandwidth and the frequency span reduced to obtain enhanced resolution. Sweep time $\geq$ span / 3 kHz with video averaging turned off. The Peak Power Spectral Density is the highest level found across the emission in a 3 kHz resolution bandwidth.			
<b>Supporting Information</b> Calculated Power = $A + 10 \log (1/x)$ dBm $A = \text{Total Power Spectral Density } [10 \text{ Log}_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]$ $x = \text{Duty Cycle}$ Limit Line: KDB 662911 was implemented for In-band power spectral density (PSD) measurements - Option (2) measure and subtract $10 \log (N)$ dB from the limit for devices with multiple RF ports			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 45 of 333

Equipment Configuration for Power Spectral Density			
<b>Variant:</b>	802.11b	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	1 MBit/s	<b>Antenna Gain (dBi):</b>	N/A
<b>Modulation:</b>	CCK	<b>Beam Forming Gain (Y):</b>	N/A
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

Test Measurement Results								
Test Frequency	Measured Power Spectral Density (dBm)				Calculated Total Power Spectral Density		Limit	Margin
	Port(s)				dBm			
MHz	a	b	c	d	Σ Port(s)	Conversion to 3 kHz RBW	dBm	dB
2412.0	-4.512	-4.784			-1.636	N/A	≤8.0	-9.64
2437.0	-6.035	-5.520			-2.760	N/A	≤8.0	-10.76
2462.0	-5.488	-5.091			-2.275	N/A	≤8.0	-10.27

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 Measuring RF Spectrum Mask
Measurement Uncertainty:	±2.81 dB

Equipment Configuration for Power Spectral Density			
<b>Variant:</b>	802.11g	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	N/A
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	N/A
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

Test Measurement Results								
Test Frequency	Measured Power Spectral Density (dBm)				Calculated Total Power Spectral Density		Limit	Margin
	Port(s)				dBm			
MHz	a	b	c	d	Σ Port(s)	Conversion to 3 kHz RBW	dBm	dB
2412.0	-4.892	-6.200			-2.487	N/A	≤8.0	-10.49
2437.0	-6.214	-6.430			-3.310	N/A	≤8.0	-11.31
2462.0	-6.267	-5.836			-3.036	N/A	≤8.0	-11.04

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 Measuring RF Spectrum Mask
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 46 of 333

Equipment Configuration for Power Spectral Density			
<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	N/A
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	N/A
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

Test Measurement Results								
Test Frequency	Measured Power Spectral Density (dBm)				Calculated Total Power Spectral Density		Limit	Margin
	Port(s)				dBm			
MHz	a	b	c	d	Σ Port(s)	Conversion to 3 kHz RBW	dBm	dB
2412.0	-5.435	-5.291			-2.352	N/A	≤8.0	-10.35
2437.0	-6.220	-6.651			-3.420	N/A	≤8.0	-11.42
2462.0	-4.994	-6.206			-2.548	N/A	≤8.0	-10.55

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 Measuring RF Spectrum Mask
Measurement Uncertainty:	±2.81 dB

Equipment Configuration for Power Spectral Density			
<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	N/A
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	N/A
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

Test Measurement Results								
Test Frequency	Measured Power Spectral Density (dBm)				Calculated Total Power Spectral Density		Limit	Margin
	Port(s)				dBm			
MHz	a	b	c	d	Σ Port(s)	Conversion to 3 kHz RBW	dBm	dB
2422.0	-5.563	-8.638			-3.824	N/A	≤8.0	-11.82
2437.0	-8.689	-9.136			-5.896	N/A	≤8.0	-13.90
2452.0	-6.753	-9.236			-4.809	N/A	≤8.0	-12.81

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 Measuring RF Spectrum Mask
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 47 of 333

Equipment Configuration for Power Spectral Density			
<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	N/A
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	N/A
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

Test Measurement Results								
Test Frequency	Measured Power Spectral Density (dBm)				Calculated Total Power Spectral Density		Limit	Margin
	Port(s)				dBm			
MHz	a	b	c	d	Σ Port(s)	Conversion to 3 kHz RBW	dBm	dB
5745.0	-7.505	-10.043			-5.581	N/A	≤8.0	-13.58
5785.0	-6.720	-8.677			-4.579	N/A	≤8.0	-12.58
5825.0	-6.462	-8.404			-4.315	N/A	≤8.0	-12.32

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 Measuring RF Spectrum Mask
Measurement Uncertainty:	±2.81 dB

Equipment Configuration for Power Spectral Density			
<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	N/A
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	N/A
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

Test Measurement Results								
Test Frequency	Measured Power Spectral Density (dBm)				Calculated Total Power Spectral Density		Limit	Margin
	Port(s)				dBm			
MHz	a	b	c	d	Σ Port(s)	Conversion to 3 kHz RBW	dBm	dB
5745.0	-7.465	-9.769			-5.456	N/A	≤8.0	-13.46
5785.0	-7.158	-9.079			-5.003	N/A	≤8.0	-13.00
5825.0	-6.765	-8.665			-4.602	N/A	≤8.0	-12.60

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 Measuring RF Spectrum Mask
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 48 of 333

Equipment Configuration for Power Spectral Density			
<b>Variants:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	N/A
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	N/A
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

Test Measurement Results								
Test Frequency	Measured Power Spectral Density (dBm)				Calculated Total Power Spectral Density		Limit	Margin
	Port(s)				dBm			
MHz	a	b	c	d	Σ Port(s)	Conversion to 3 kHz RBW	dBm	dB
5755.0	-7.656	-12.120			-6.328	N/A	≤8.0	-14.33
5795.0	-10.239	-12.427			-8.186	N/A	≤8.0	-16.19

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 Measuring RF Spectrum Mask
Measurement Uncertainty:	±2.81 dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 49 of 333

---

## Specification

### Peak Power Spectral Density Limits

**§15.247(e)** For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission

**RSS-210 §A8.2(2)** The transmitter power spectral density (into the antenna) shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0 second duration.

## Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 50 of 333

---

#### 5.1.1.4. Conducted Spurious Emissions

<b>Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions</b>			
<b>Standard:</b>	FCC CFR 47:15.247	<b>Ambient Temp. (°C):</b>	24.0 - 27.5
<b>Test Heading:</b>	Max Unwanted Emission Levels	<b>Rel. Humidity (%):</b>	32 - 45
<b>Standard Section(s):</b>	15.247 (d)	<b>Pressure (mBars):</b>	999 - 1001
<b>Reference Document(s):</b>	KDB 558074 - D01 DTS Measurement Guidance v01: Section 5.4 Maximum Unwanted Emission Levels		

**Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement**  
Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 20 dB below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 51 of 333

Equipment Configuration for Transmitter Conducted Spurious and Band-Edge Emissions			
<b>Variant:</b>	802.11b	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	1 MBit/s	<b>Antenna Gain (dBi):</b>	N/A
<b>Modulation:</b>	CCK	<b>Beam Forming Gain (Y):</b>	N/A
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

Test Measurement Results									
Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
		SE	Limit	SE	Limit	SE	Limit	SE	Limit
<b>2412.0</b>	30.0 - 26000.0	-42.727	-11.89	-47.840	-11.70				
<b>2437.0</b>	30.0 - 26000.0	-42.771	-12.57	-42.318	-11.81				
<b>2462.0</b>	30.0 - 26000.0	-51.053	-12.91	-51.096	-12.56				

SE - Maximum spurious emission found

Test Frequency	Band-Edge Frequency	Transmitter Conducted Band-Edge Emissions (dBm)							
		Port a		Port b		Port c		Port d	
		BE	Limit	BE	Limit	BE	Limit	BE	Limit
<b>2412.0</b>	2400.0	-45.338	-10.32	-44.075	-10.52				
<b>2462.0</b>	2483.5	-47.449	-11.19	-47.645	-10.86				

BE - Maximum band-edge emission found

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-05 Measurement of Spurious Emissions
Measurement Uncertainty:	≤ 40 GHz ±2.37 dB > 40 GHz ±4.6 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 52 of 333

Equipment Configuration for Transmitter Conducted Spurious and Band-Edge Emissions			
<b>Variant:</b>	802.11g	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	N/A
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	N/A
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

Test Measurement Results									
Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
		SE	Limit	SE	Limit	SE	Limit	SE	Limit
<b>2412.0</b>	30.0 - 26000.0	-42.542	-11.92	-52.009	-14.38				
<b>2437.0</b>	30.0 - 26000.0	-42.068	-15.57	-42.825	-16.26				
<b>2462.0</b>	30.0 - 26000.0	-52.755	-15.63	-52.192	-13.76				

SE - Maximum spurious emission found

Test Frequency	Band-Edge Frequency	Transmitter Conducted Band-Edge Emissions (dBm)							
		Port a		Port b		Port c		Port d	
		BE	Limit	BE	Limit	BE	Limit	BE	Limit
<b>2412.0</b>	2400.0	-22.950	-11.32	-19.018	-11.33				
<b>2462.0</b>	2483.5	-38.346	-11.84	-33.917	-12.31				

BE - Maximum band-edge emission found

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-05 Measurement of Spurious Emissions
Measurement Uncertainty:	≤ 40 GHz ±2.37 dB > 40 GHz ±4.6 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 53 of 333

Equipment Configuration for Transmitter Conducted Spurious and Band-Edge Emissions			
<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	N/A
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	N/A
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

Test Measurement Results									
Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
		SE	Limit	SE	Limit	SE	Limit	SE	Limit
2412.0	30.0 - 26000.0	-42.375	-12.44	-51.728	-12.28				
2437.0	30.0 - 26000.0	-42.501	-13.97	-42.158	-13.83				
2462.0	30.0 - 26000.0	-52.515	-13.29	-52.066	-14.28				
SE - Maximum spurious emission found									
Test Frequency	Band-Edge Frequency	Transmitter Conducted Band-Edge Emissions (dBm)							
		Port a		Port b		Port c		Port d	
		BE	Limit	BE	Limit	BE	Limit	BE	Limit
2412.0	2400.0	-21.208	-11.43	-20.396	-11.35				
2462.0	2483.5	-34.748	-11.87	-32.572	-12.14				
BE - Maximum band-edge emission found									

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-05 Measurement of Spurious Emissions
Measurement Uncertainty:	$\leq 40$ GHz $\pm 2.37$ dB $> 40$ GHz $\pm 4.6$ dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 54 of 333

Equipment Configuration for Transmitter Conducted Spurious and Band-Edge Emissions			
<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	N/A
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	N/A
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

Test Measurement Results									
Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
		SE	Limit	SE	Limit	SE	Limit	SE	Limit
<b>2422.0</b>	30.0 - 26000.0	-42.418	-15.12	-43.065	-15.48				
<b>2437.0</b>	30.0 - 26000.0	-42.182	-14.82	-42.711	-14.74				
<b>2452.0</b>	30.0 - 26000.0	-51.372	-15.67	-52.092	-15.70				
SE - Maximum spurious emission found									
Test Frequency	Band-Edge Frequency	Transmitter Conducted Band-Edge Emissions (dBm)							
		Port a		Port b		Port c		Port d	
		BE	Limit	BE	Limit	BE	Limit	BE	Limit
<b>2422.0</b>	2400.0	-22.627	-14.70	-22.668	-14.74				
<b>2452.0</b>	2483.5	-30.561	-14.98	-29.550	-15.64				
BE - Maximum band-edge emission found									

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-05 Measurement of Spurious Emissions
Measurement Uncertainty:	$\leq 40$ GHz $\pm 2.37$ dB $> 40$ GHz $\pm 4.6$ dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 55 of 333

Equipment Configuration for Transmitter Conducted Spurious and Band-Edge Emissions			
<b>Variant:</b>	802.11a	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6 MBit/s	<b>Antenna Gain (dBi):</b>	N/A
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	N/A
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

Test Measurement Results									
Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
5745.0	30.0 - 26000.0	-48.721	-19.26	-39.402	-20.18				
5785.0	30.0 - 26000.0	-39.241	-14.87	-39.074	-16.09				
5825.0	30.0 - 26000.0	-38.578	-14.42	-39.215	-16.27				

SE - Maximum spurious emission found

Test Frequency	Band-Edge Frequency	Transmitter Conducted Band-Edge Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	BE	Limit	BE	Limit	BE	Limit	BE	Limit
5745.0	5725.0	-36.716	-17.69	-39.091	-19.27				
5825.0	5850.0	-32.676	-13.96	-35.319	-14.95				

BE - Maximum band-edge emission found

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-05 Measurement of Spurious Emissions
Measurement Uncertainty:	$\leq 40$ GHz $\pm 2.37$ dB $> 40$ GHz $\pm 4.6$ dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 56 of 333

Equipment Configuration for Transmitter Conducted Spurious and Band-Edge Emissions			
<b>Variant:</b>	802.11n HT-20	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	6.5 MBit/s	<b>Antenna Gain (dBi):</b>	N/A
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	N/A
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

Test Measurement Results									
Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
		SE	Limit	SE	Limit	SE	Limit	SE	Limit
5745.0	30.0 - 26000.0	-47.850	-15.51	-39.534	-16.96				
5785.0	30.0 - 26000.0	-39.018	-15.74	-39.037	-17.71				
5825.0	30.0 - 26000.0	-39.121	-14.63	-39.185	-16.89				
SE - Maximum spurious emission found									
Test Frequency	Band-Edge Frequency	Transmitter Conducted Band-Edge Emissions (dBm)							
		Port a		Port b		Port c		Port d	
		BE	Limit	BE	Limit	BE	Limit	BE	Limit
5745.0	5725.0	-30.545	-14.21	-34.704	-16.13				
5825.0	5850.0	-33.321	-14.28	-34.597	-15.50				
BE - Maximum band-edge emission found									

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-05 Measurement of Spurious Emissions
Measurement Uncertainty:	≤ 40 GHz ±2.37 dB > 40 GHz ±4.6 dB

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 57 of 333

Equipment Configuration for Transmitter Conducted Spurious and Band-Edge Emissions			
<b>Variant:</b>	802.11n HT-40	<b>Duty Cycle (%):</b>	99
<b>Data Rate:</b>	13.5 MBit/s	<b>Antenna Gain (dBi):</b>	N/A
<b>Modulation:</b>	OFDM	<b>Beam Forming Gain (Y):</b>	N/A
<b>TPC:</b>	Maximum Power		
<b>Engineering Test Notes:</b>			

Test Measurement Results									
Test Frequency	Frequency Range	Transmitter Conducted Spurious Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
5755.0	30.0 - 26000.0	-39.052	-17.53	-38.655	-19.60				
5795.0	30.0 - 26000.0	-38.311	-17.56	-48.460	-20.47				

SE - Maximum spurious emission found

Test Frequency	Band-Edge Frequency	Transmitter Conducted Band-Edge Emissions (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	BE	Limit	BE	Limit	BE	Limit	BE	Limit
5755.0	5725.0	-29.296	-16.74	-35.974	-19.32				
5795.0	5850.0	2.490	-17.51	0.496	-19.50				

BE - Maximum band-edge emission found

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-05 Measurement of Spurious Emissions
Measurement Uncertainty:	$\leq 40$ GHz $\pm 2.37$ dB $> 40$ GHz $\pm 4.6$ dB

Note: [click the link in the above results matrix to view the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 58 of 333

## Specification

### Limits Band-Edge

Lower Limit Band-edge	Upper Limit Band-edge	Limit below highest level of desired power
2,400 MHz	2,483.5 MHz	≥ 20 dB
5725 MHz	5850 MHz	

**§15.247(d) and RSS-210 §A8.5** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

#### §15.247(d)

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section §15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(a)).

**RSS-210 §A8.5** If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

#### RSS-Gen §4.7

The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate or carrier frequency), or from 30 MHz, whichever is the lowest frequency, to the 5<sup>th</sup> harmonic of the highest frequency generated without exceeding 40 GHz.

### Laboratory Measurement Uncertainty for Conducted Spurious Emissions

Measurement uncertainty	±2.37 dB
-------------------------	----------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-05 'Measurement of Spurious Emissions'	0088, 0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## 5.1.2. Radiated Emission Testing

### Transmitter Radiated Spurious Emissions (above 1 GHz); Peak Field Strength Measurements; and Radiated Band Edge Measurements – Restricted Bands

**FCC, Part 15 Subpart C §15.247(d) 15.205; 15.209**  
**Industry Canada RSS-210 §A8.5, §2.2, §2.6**  
**Industry Canada RSS-Gen §4.7**

#### Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

For example:

Given receiver input reading of 51.5 dB $\mu$ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 60 of 333

---

**NOTE: KDB 662911 was implemented for Out-of-Band measurements. Where necessary Option (2) Measure and add  $10 \log(N)$  dB was implemented**

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 61 of 333

### 5.1.2.1. Integral antenna APINR109

Low

<b>Test Freq.</b>	2412 MHz	<b>Engineer</b>	jmh
<b>Variant</b>	802.11b; 1 Mbs	<b>Temp (°C)</b>	25
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	32
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Integral	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

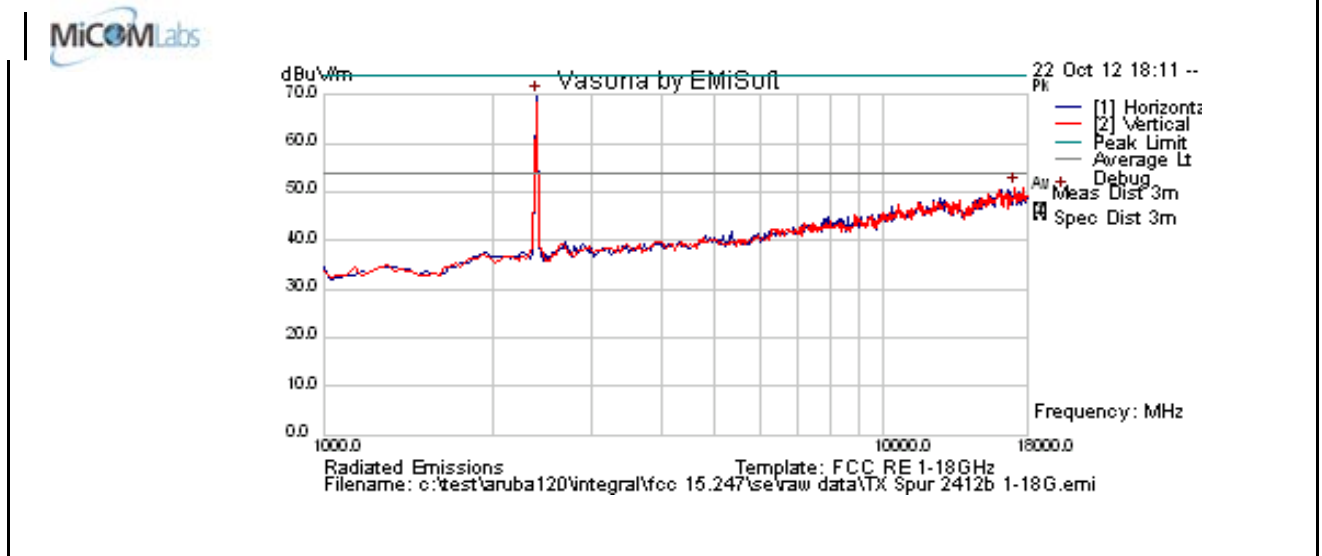

#### Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2396.794	78.6	3.0	-11.7	69.9	Peak [Scan]	H						FUND
17080.16	42.1	8.5	0.4	50.9	Peak [Scan]	V	150	0	54.0	-3.1	Pass	Noise
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR108, APINR109 Wireless AP  
To: FCC 47 CFR Part 15.247 & IC RSS-210  
Serial #: ARUB120-U1 Rev A  
Issue Date: 28th November 2012  
Page: 62 of 333

### 11b 2390 MHz Band Edge

 Marker 1 [T1] RBW 1 MHz RF Att 30 dB  
Ref Lvl 51.52 dBµV VBW 1 MHz  
100 dBµV 2.38543086 GHz SWT 20 s Unit dBµV

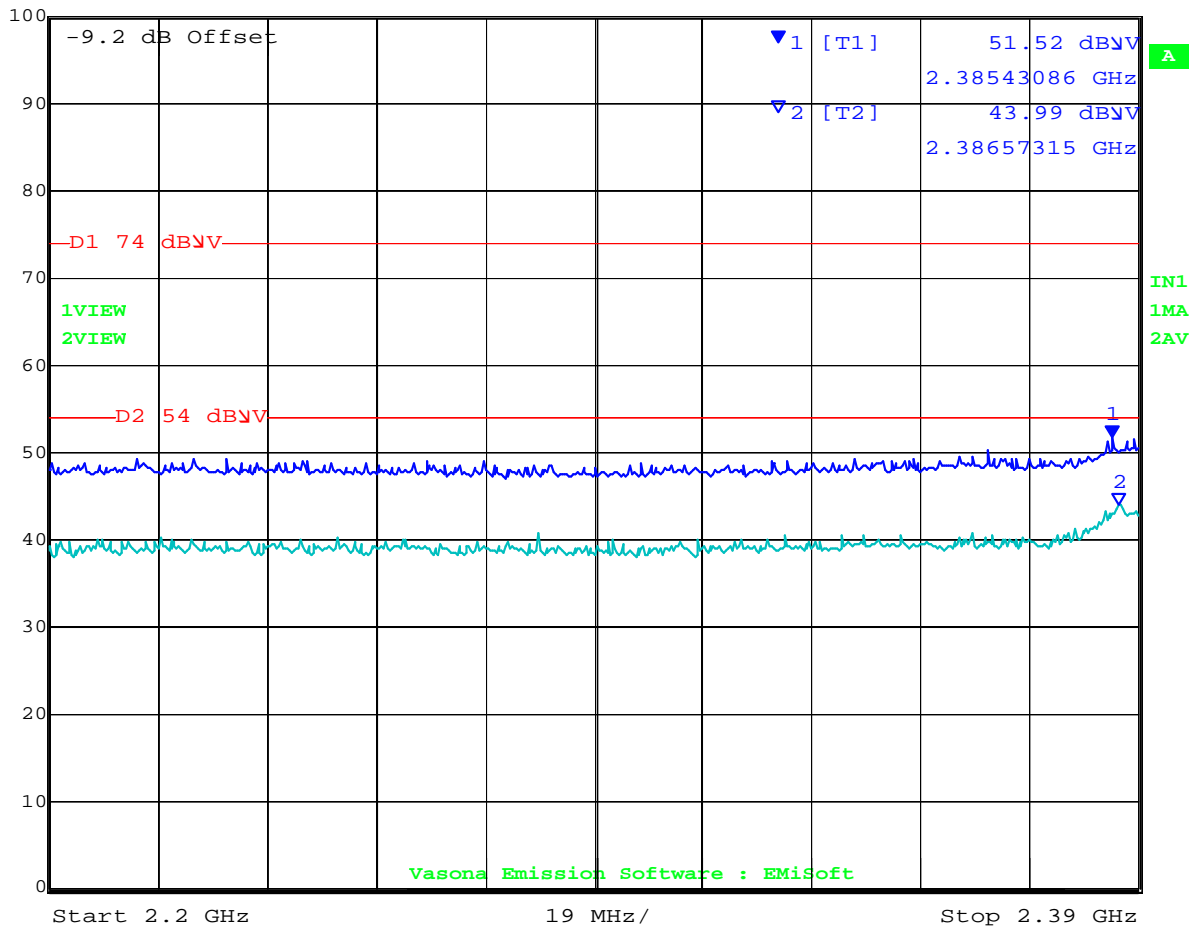

Date: 22.OCT.2012 18:48:00

NART = 18


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR108, APINR109 Wireless AP  
To: FCC 47 CFR Part 15.247 & IC RSS-210  
Serial #: ARUB120-U1 Rev A  
Issue Date: 28th November 2012  
Page: 63 of 333

### 11g 2390 MHz Band Edge

 Marker 2 [T2] RBW 1 MHz RF Att 30 dB  
Ref Lvl 53.80 dBµV VBW 1 MHz  
100 dBµV 2.38923848 GHz SWT 20 s Unit dBµV

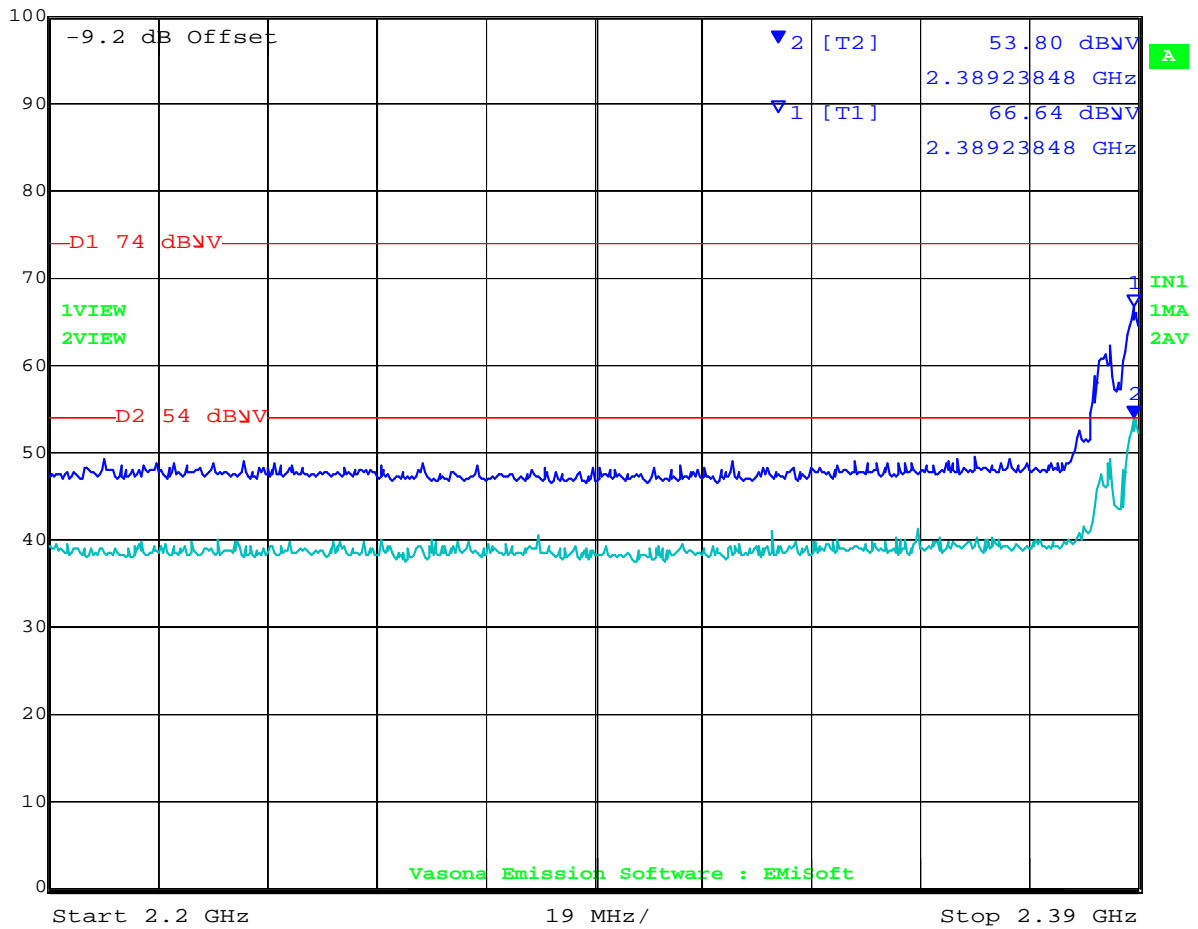

Date: 22.OCT.2012 18:53:01


NART = 18


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 64 of 333

11n HT-20 2390 MHz Band Edge

 Marker 1 [T1] RBW 1 MHz RF Att 30 dB  
Ref Lvl 66.42 dBμV VBW 1 MHz  
100 dBμV 2.38923848 GHz SWT 20 s Unit dBμV

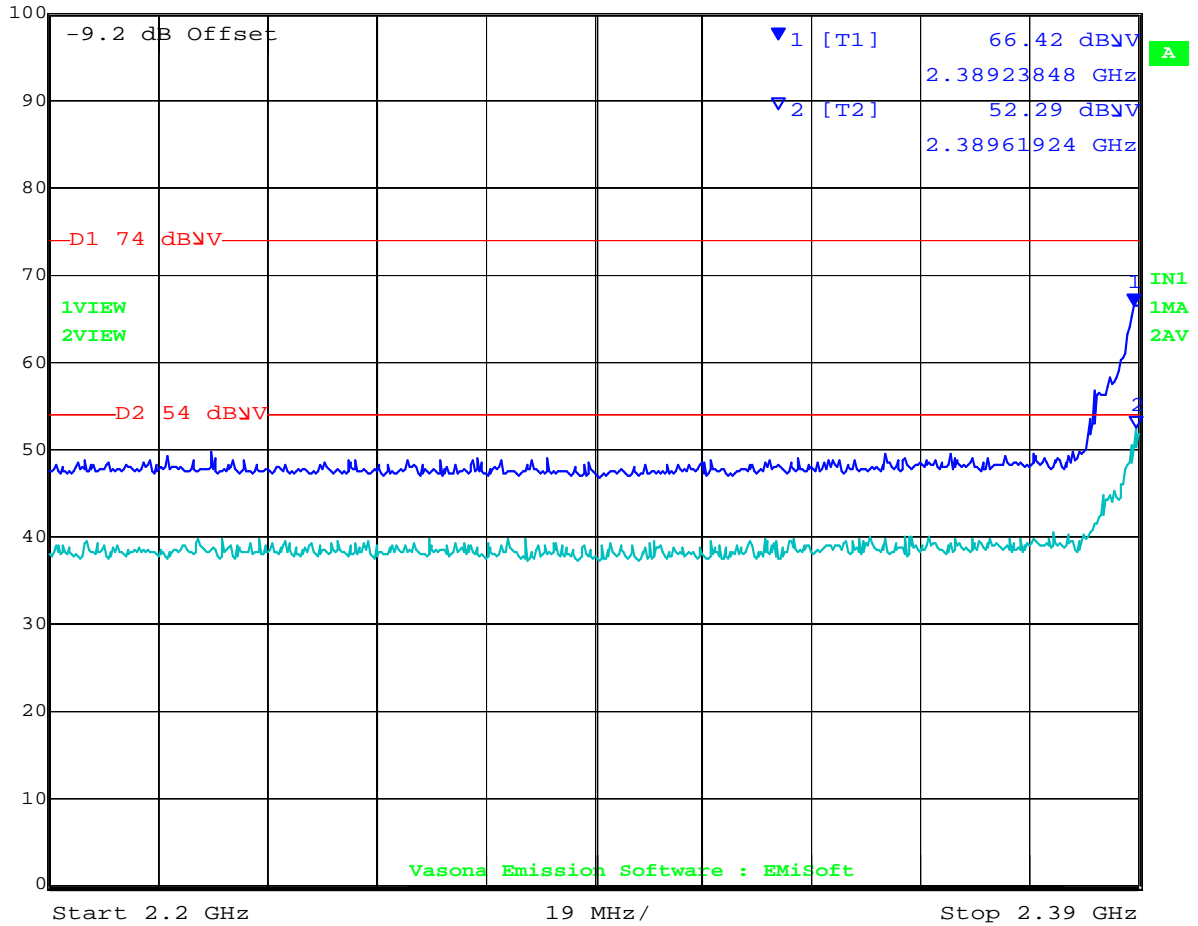

Date: 22.OCT.2012 18:57:04

NART = 18


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 65 of 333

### 11n HT-40 2390 MHz Band Edge

 **Marker 1 [T1]** RBW 1 MHz RF Att 30 dB  
Ref Lvl 68.21 dB $\mu$ V VBW 1 MHz  
100 dB $\mu$ V 2.39000000 GHz SWT 20 s Unit dB $\mu$ V

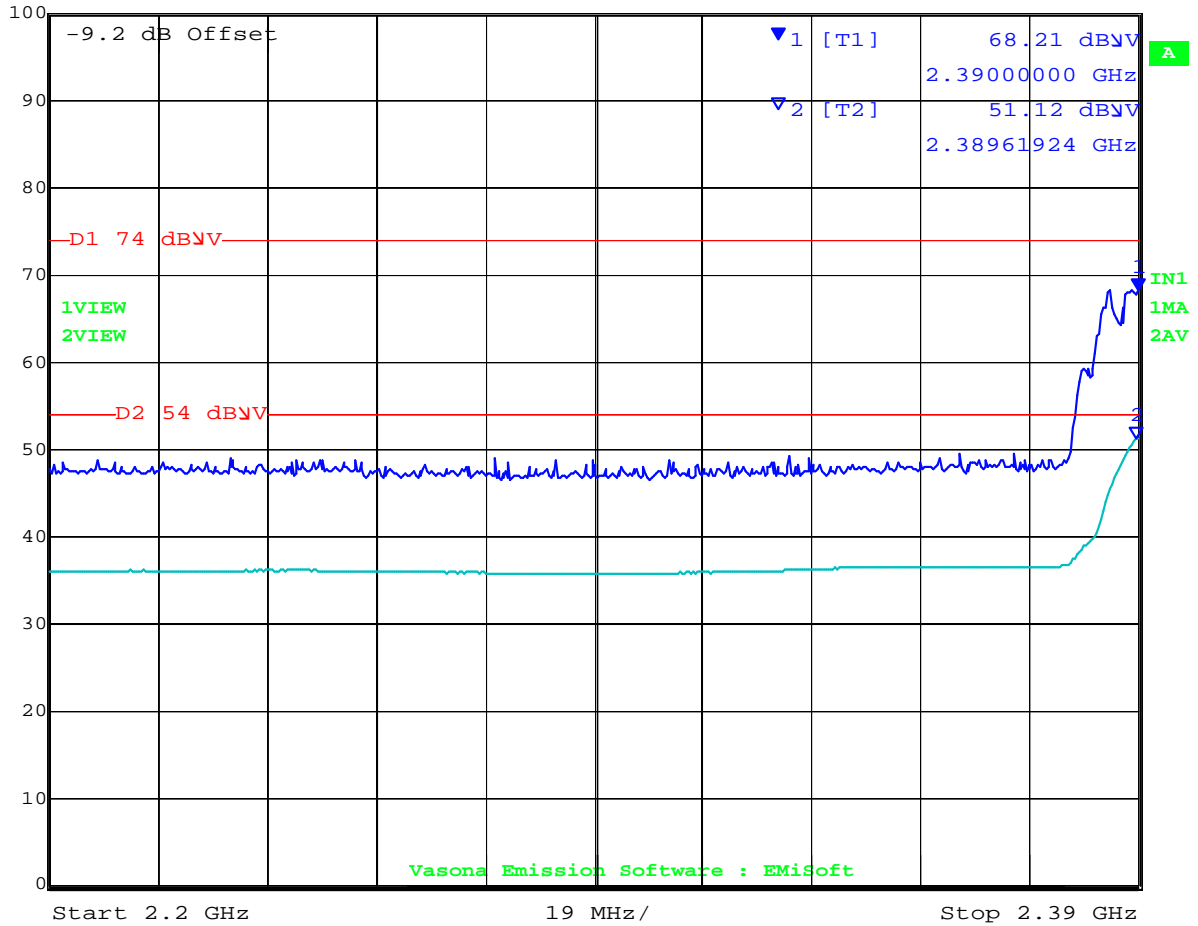

Date: 22.OCT.2012 19:07:07

Power reduction required in order to bring unit into compliance NART = 15


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 66 of 333

Mid

<b>Test Freq.</b>	2437 MHz	<b>Engineer</b>	jmh
<b>Variant</b>	802.11b; 1 Mbs	<b>Temp (°C)</b>	25
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	32
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Integral	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

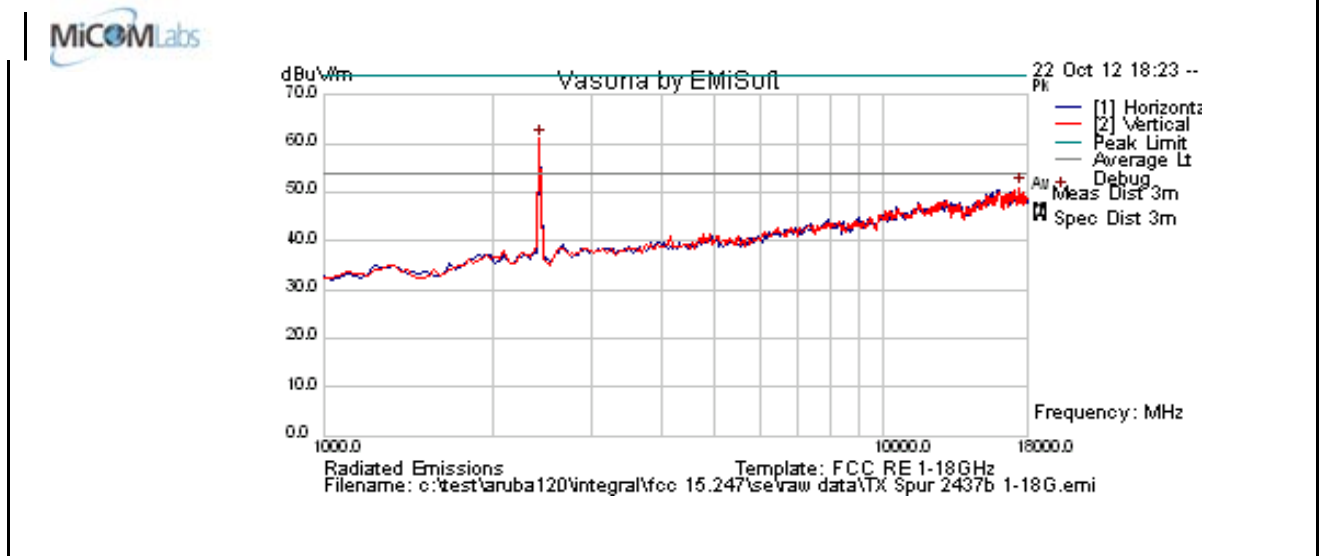

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	69.7	3.0	11.6	61.2	Peak [Scan]	V						FUND
17454.91	41.0	8.7	1.2	50.9	Peak [Scan]	V	100	0	54.0	-3.1	Pass	Noise
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 67 of 333

High

<b>Test Freq.</b>	2462 MHz	<b>Engineer</b>	jmh
<b>Variant</b>	802.11b; 1 Mbs	<b>Temp (°C)</b>	25
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	32
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Integral	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

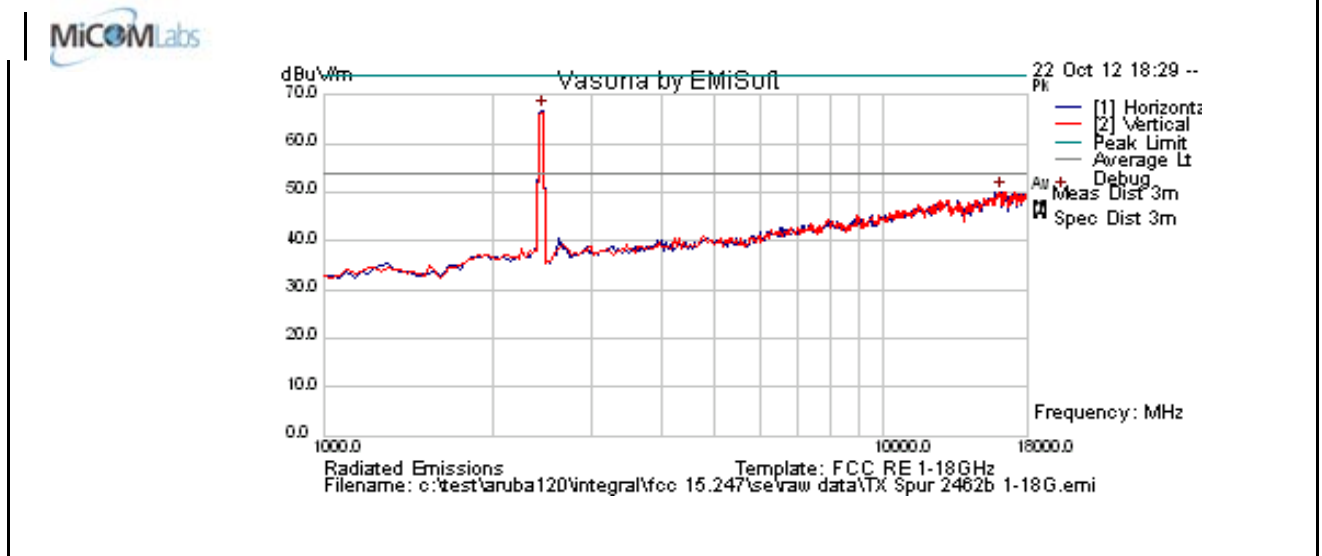


**Formally measured emission peaks**


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2464.930	75.4	3.0	-11.5	66.9	Peak [Scan]	H						FUND
16092.184	40.9	9.0	0.3	50.2	Peak [Scan]	V	100	0	54.0	-3.8	Pass	Noise
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 11b 2483.5 MHz Band Edge

 **Marker 1 [T1]** RBW 1 MHz RF Att 30 dB  
Ref Lvl 52.57 dB $\mu$ V VBW 1 MHz  
100 dB $\mu$ V 2.48363226 GHz SWT 20 s Unit dB $\mu$ V

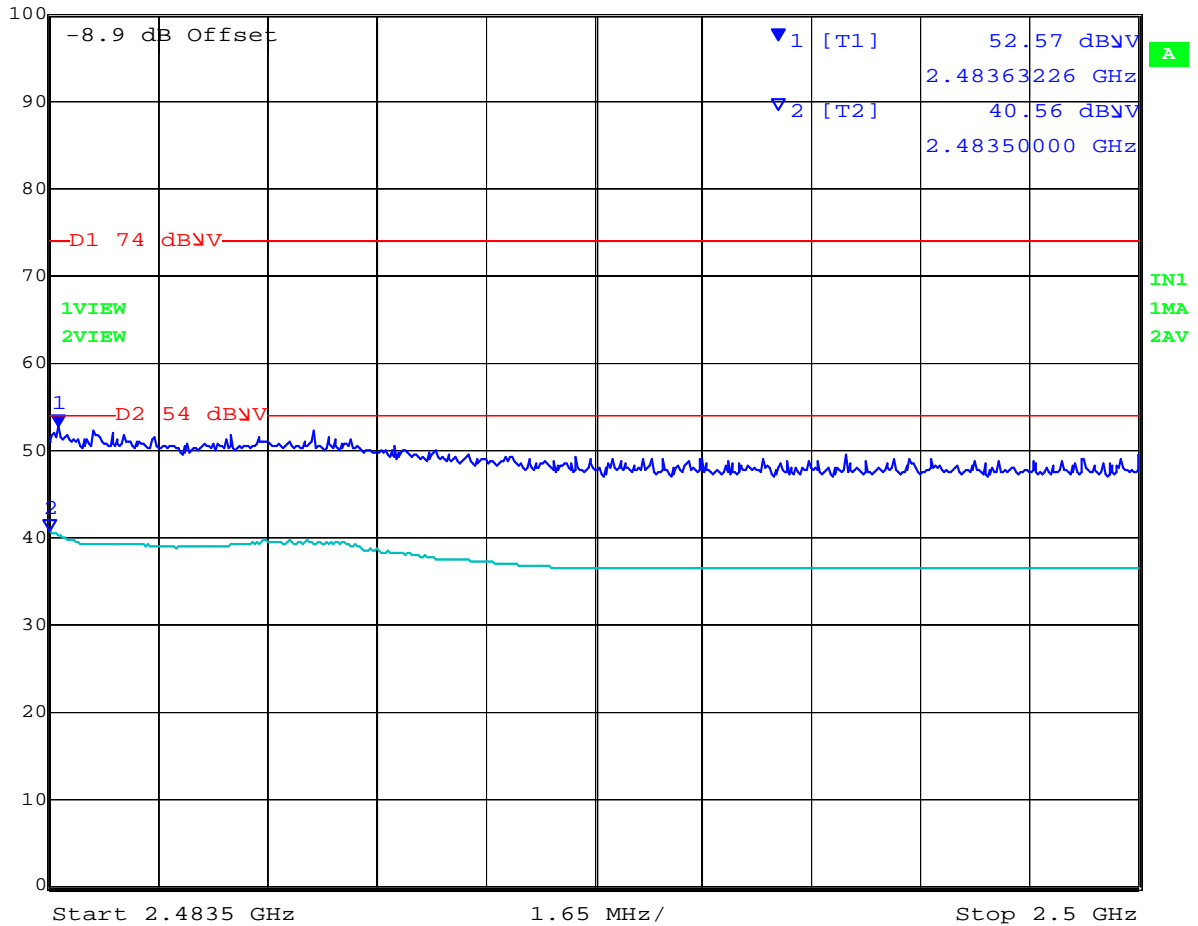


Date: 22.OCT.2012 19:44:56

NART = 18



11g 2483.5 MHz Band Edge

 **Marker 2 [T2]** RBW 1 MHz RF Att 30 dB  
Ref Lvl 49.54 dBμV VBW 1 MHz  
100 dBμV 2.48350000 GHz SWT 20 s Unit dBμV

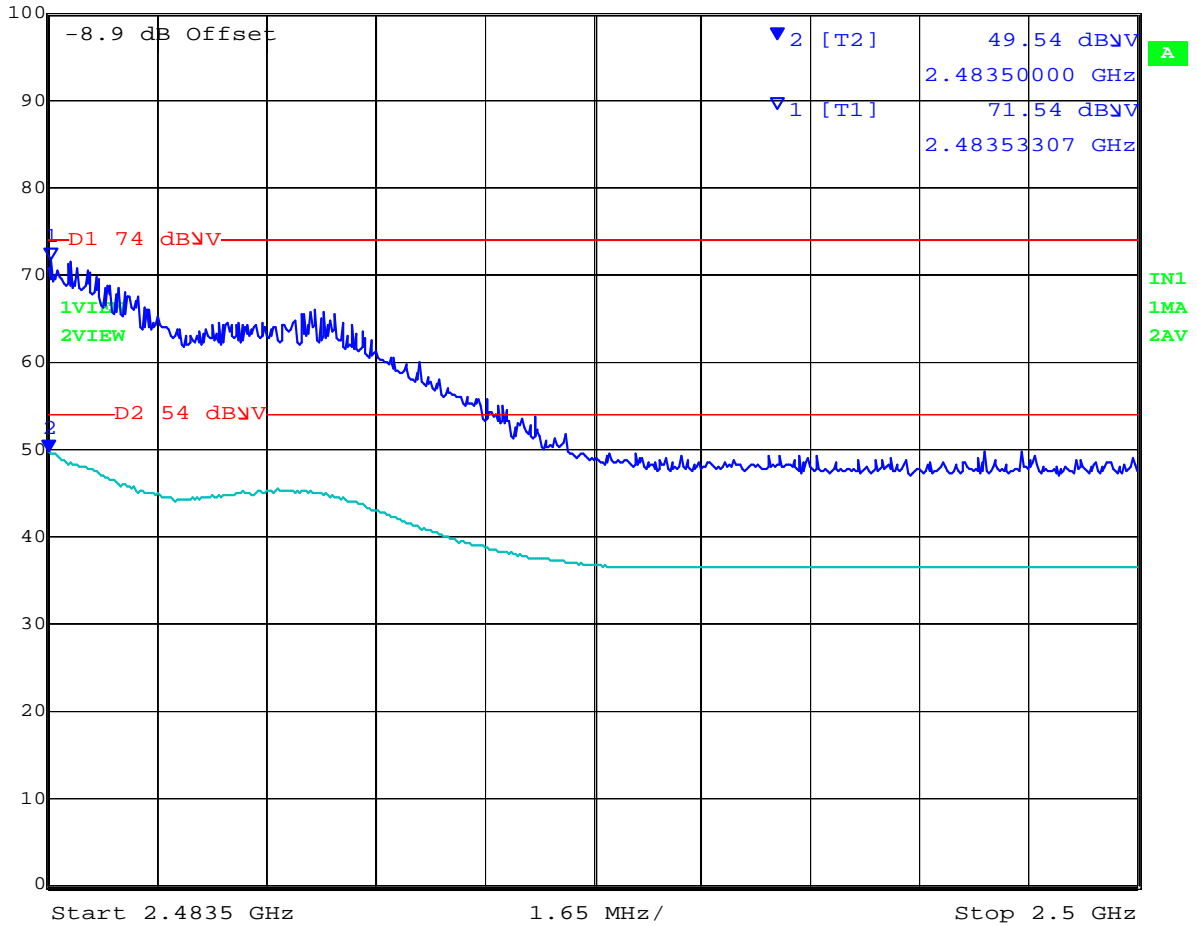


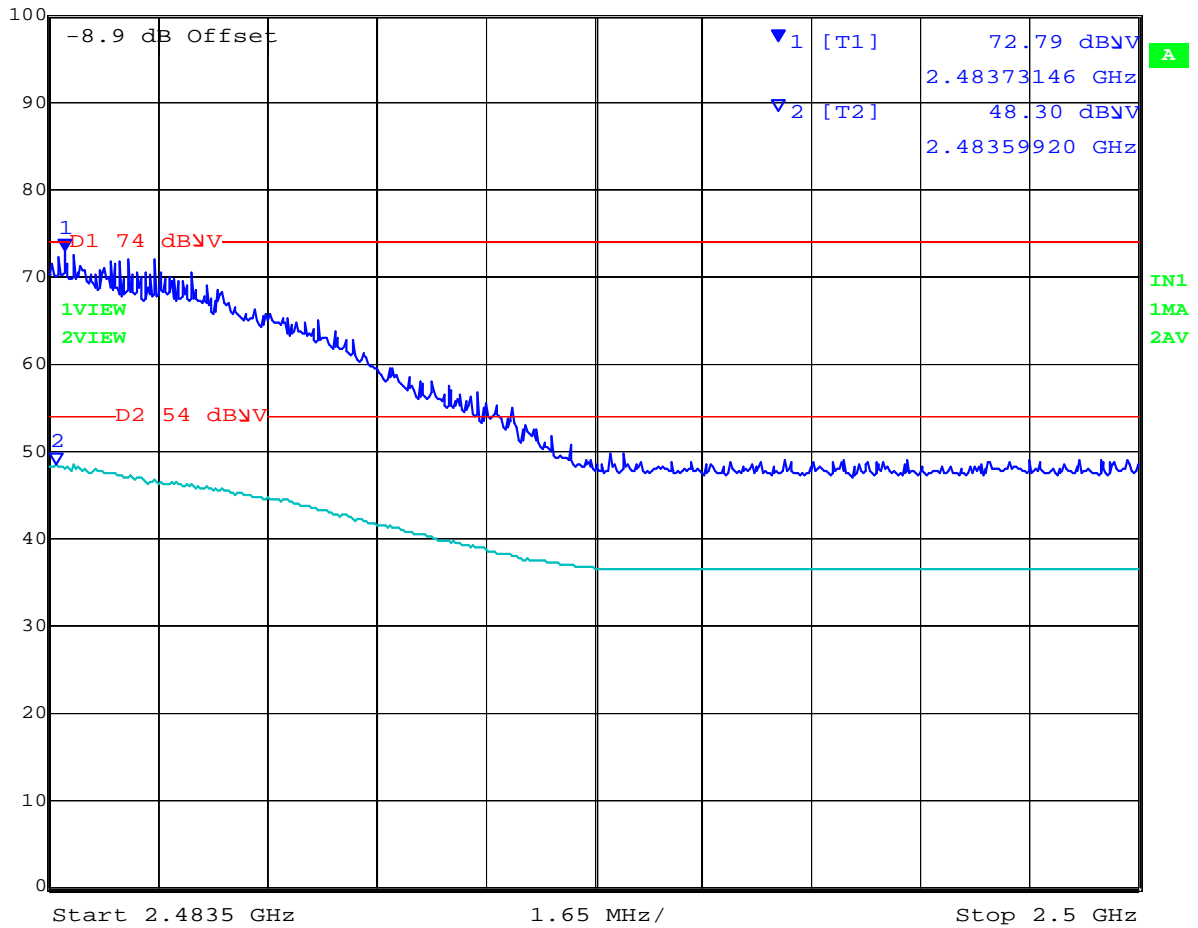
Date: 22.OCT.2012 19:39:28

NART = 18



### 11n HT-20 2483.5 MHz Band Edge

 **Marker 1 [T1]** RBW 1 MHz RF Att 30 dB  
Ref Lvl 72.79 dB $\mu$ V VBW 1 MHz  
100 dB $\mu$ V 2.48373146 GHz SWT 20 s Unit dB $\mu$ V




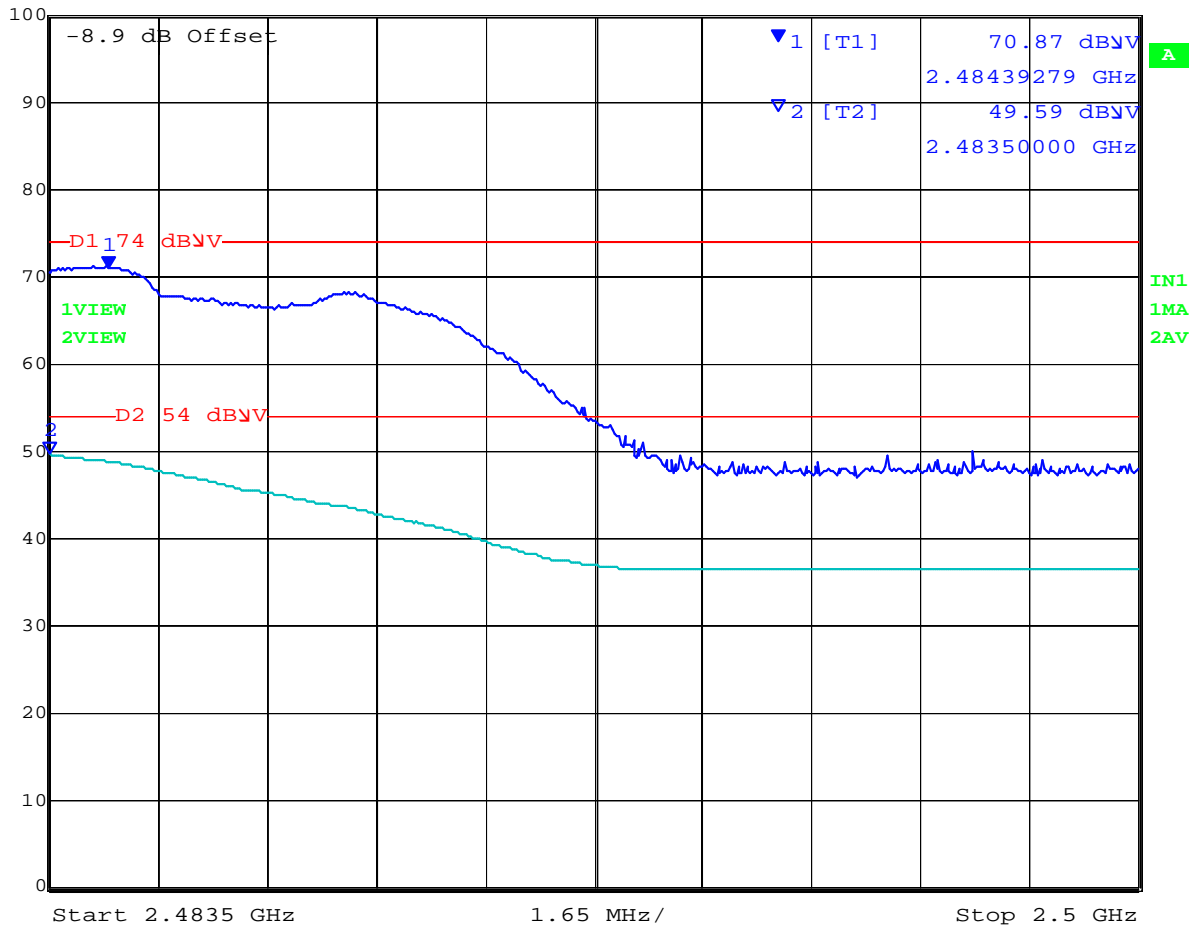
Date: 22.OCT.2012 19:34:34

Power reduction required in order to bring unit into compliance NART = 17.5



11n HT-40 2483.5 MHz Band Edge

 **Marker 1 [T1]** RBW 1 MHz RF Att 30 dB  
Ref Lvl 70.87 dBμV VBW 1 MHz  
100 dBμV 2.48439279 GHz SWT 20 s Unit dBμV



Date: 22.OCT.2012 19:27:59


Power reduction required in order to bring unit into compliance NART = 15.5



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 72 of 333

5G low

<b>Test Freq.</b>	5745 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11a; 6.5 Mbs	<b>Temp (°C)</b>	22
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	1001
<b>Antenna</b>	Integral	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

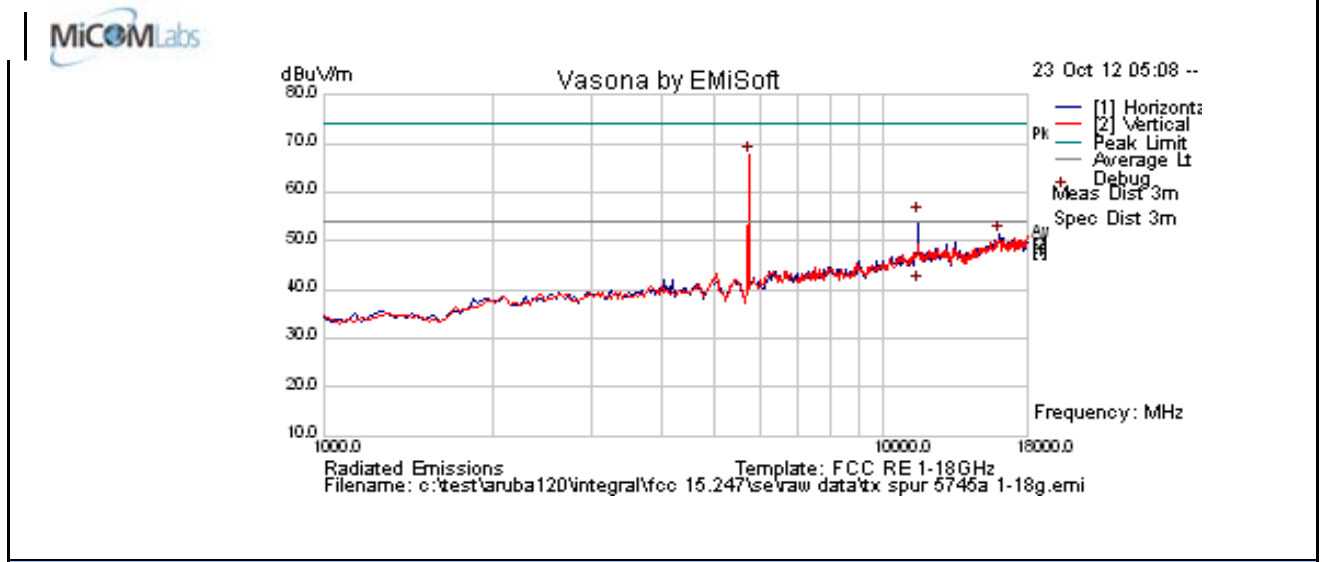


Formally measured emission peaks												
Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5735.471	72.4	4.8	-9.5	67.7	Peak [Scan]	V						FUND
16058.116	42.2	9.0	0.3	51.4	Peak [Scan]	H	150	0	54.0	-2.6	Pass	Noise
11493.657	50.3	6.8	-2.0	55.1	Peak Max	H	116	37	74	-18.9	Pass	RB
11493.657	36.3	6.8	-2.0	41.1	Average Max	H	116	37	54	-12.9	Pass	RB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





11a 5350 MHz Band Edge

 **Marker 1 [T1]** RBW 1 MHz RF Att 20 dB  
Ref Lvl 50.28 dBμV VBW 1 MHz  
100 dBμV 5.35925852 GHz SWT 20 s Unit dBμV

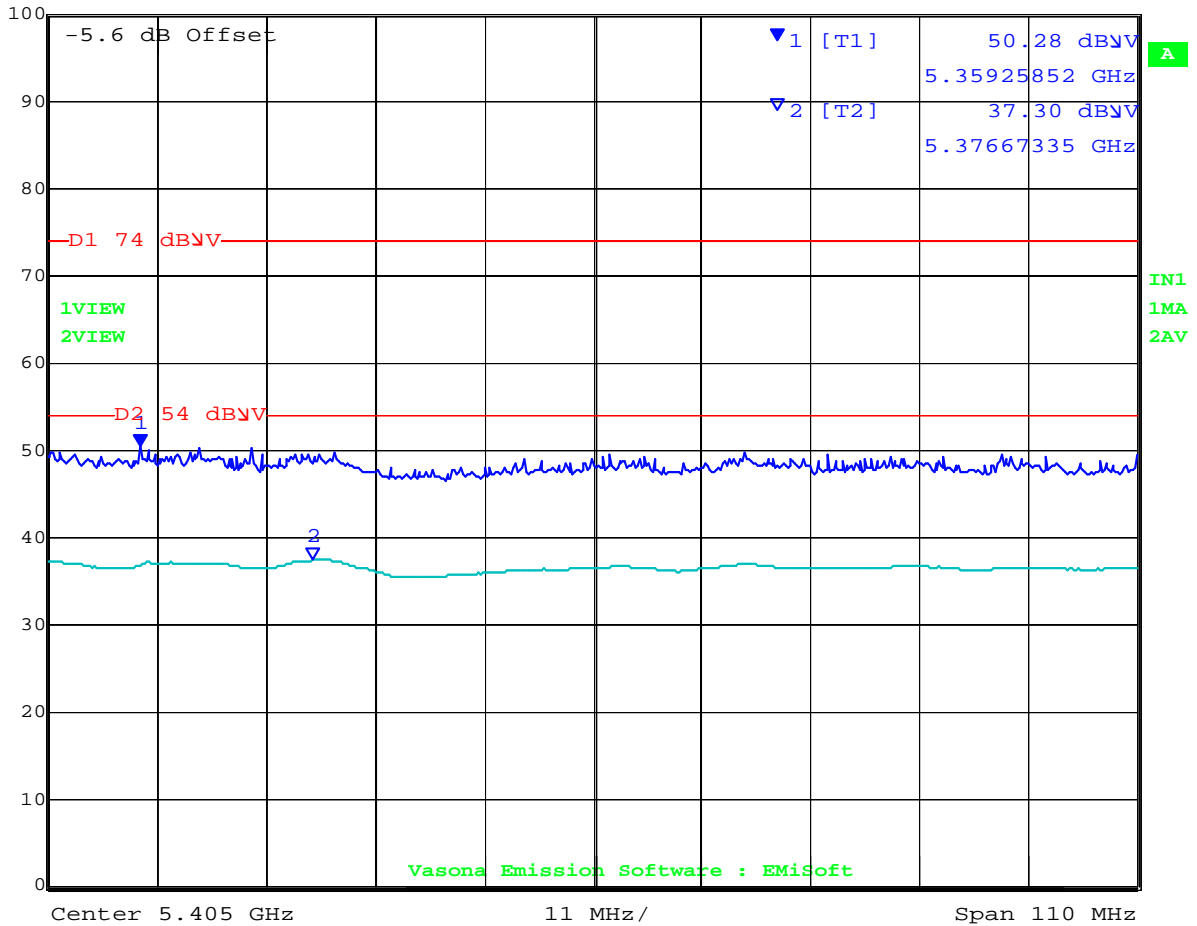


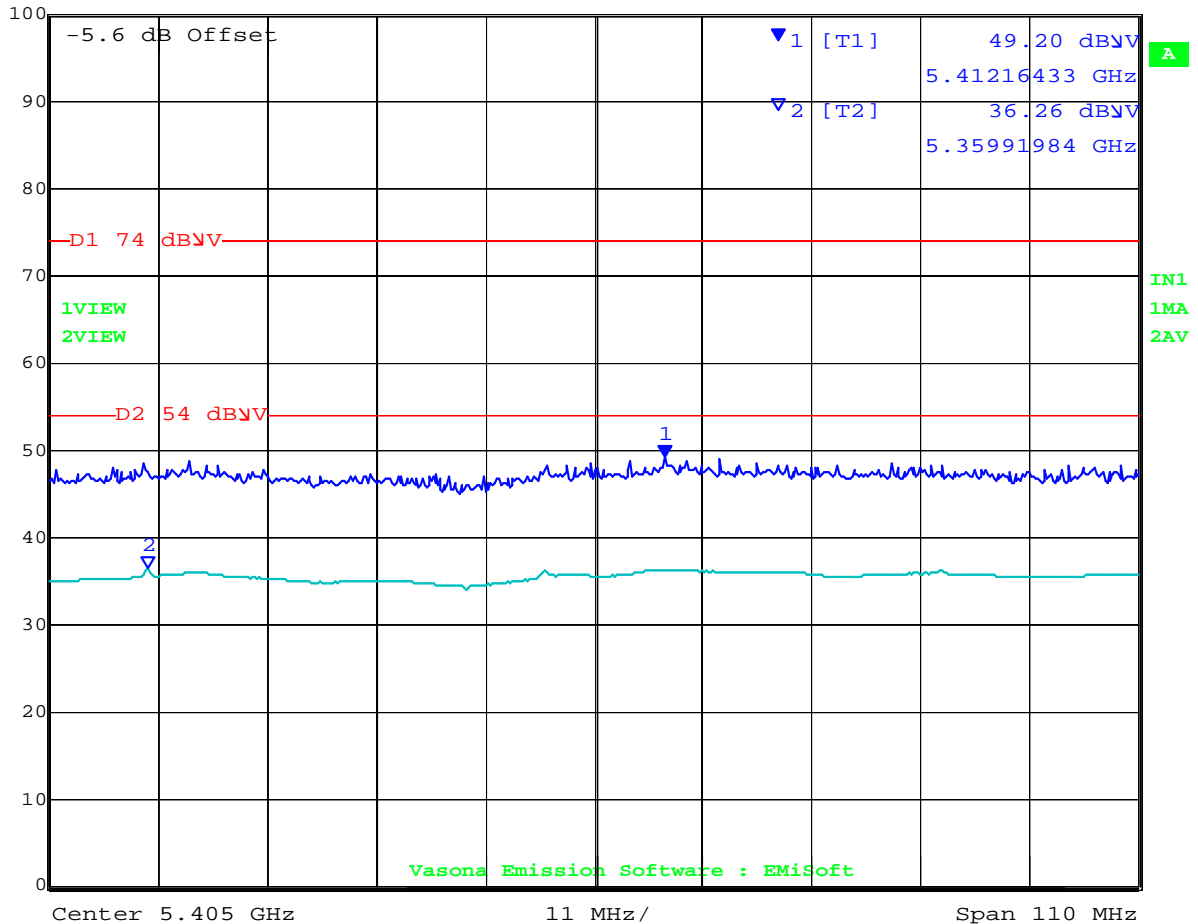
Date: 23.OCT.2012 07:12:38

Power reduction required in order to bring unit into compliance NART = 18



11n HT-20 5350 MHz Band Edge

 Marker 1 [T1] RBW 1 MHz RF Att 20 dB  
Ref Lvl 49.20 dBμV VBW 1 MHz  
100 dBμV 5.41216433 GHz SWT 20 s Unit dBμV




Date: 23.OCT.2012 07:10:32

Power reduction required in order to bring unit into compliance NART = 18



11n HT-40 5350 MHz Band Edge

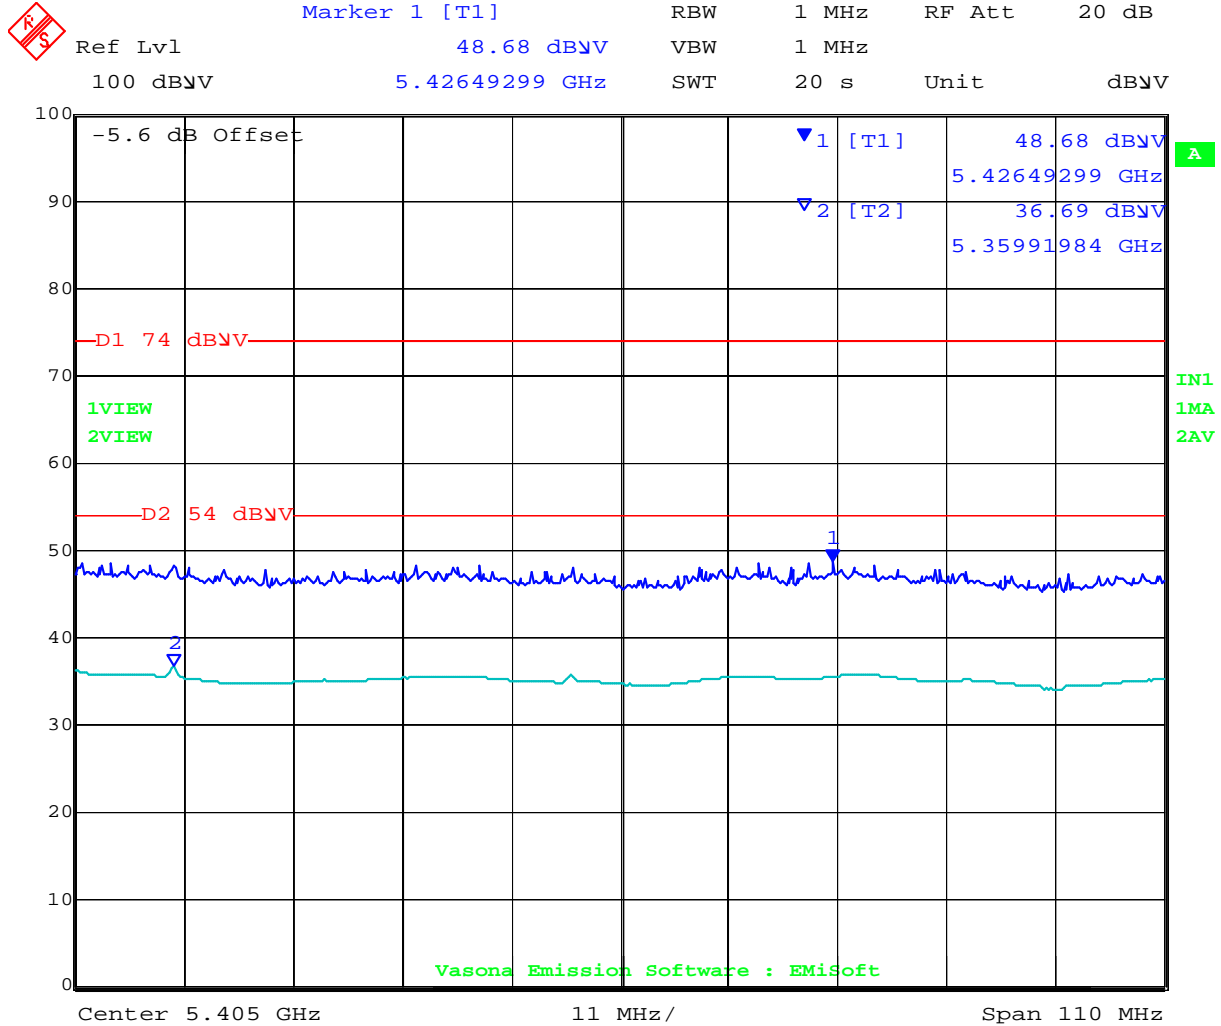

Date: 23.OCT.2012 07:08:35


Power reduction required in order to bring unit into compliance NART = 18



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 76 of 333

5G Mid

Test Freq.	5785 MHz	Engineer	JMH
Variant	802.11a; 6.5 Mbs	Temp (°C)	22
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1001
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

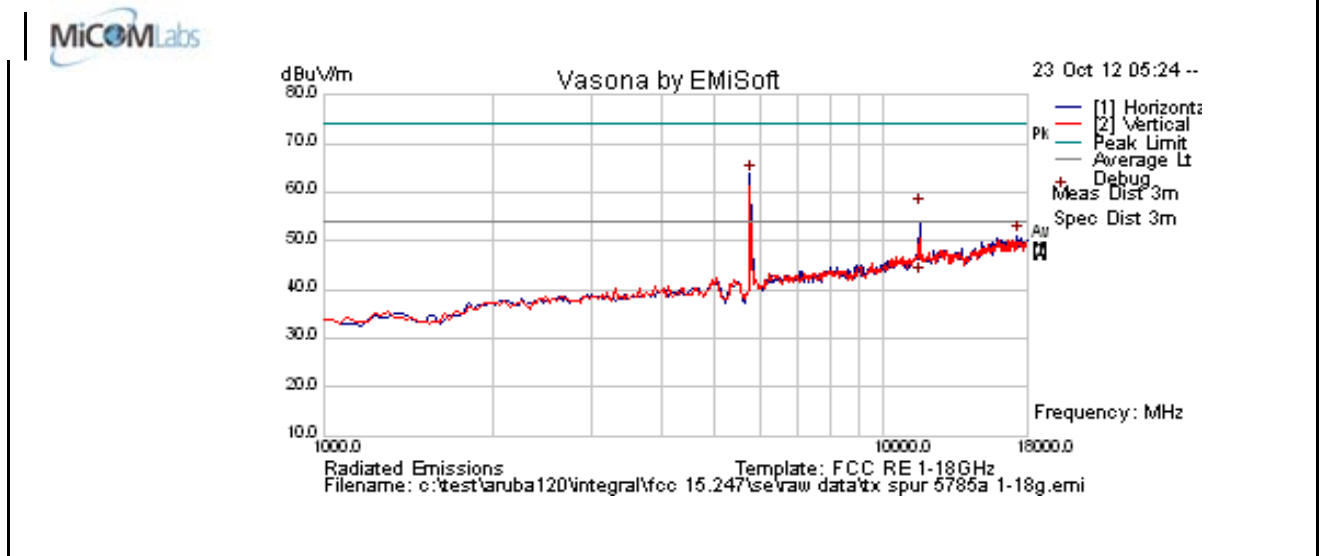

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5769.539	68.5	4.8	-9.5	63.8	Peak [Scan]	H						FUND
17284.569	41.4	8.6	1.1	51.1	Peak [Scan]	H	150	0	54.0	-2.9	Pass	Noise
11569.984	52.2	6.8	-2.0	57.0	Peak Max	H	103	27	74	-17.1	Pass	RB
11569.984	37.9	6.8	-2.0	42.7	Average Max	H	103	27	54	-11.3	Pass	RB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 77 of 333

5G High

Test Freq.	5825 MHz	Engineer	JMH
Variant	802.11a; 6.5 Mbs	Temp (°C)	22
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1001
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

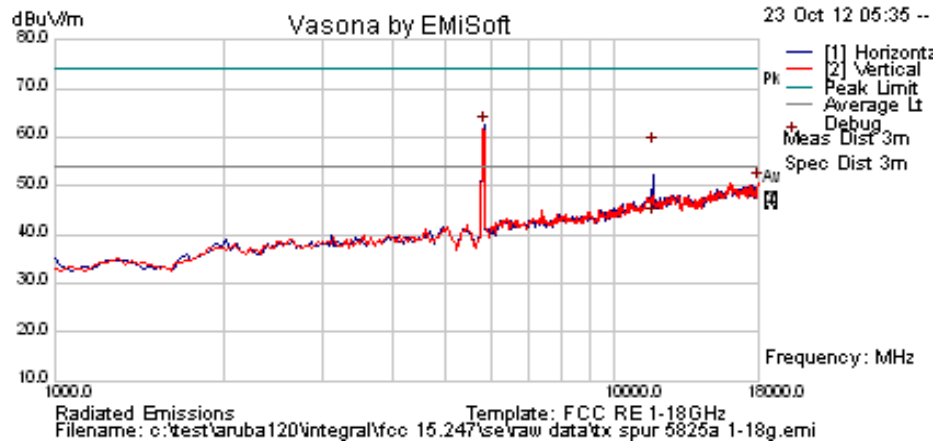

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5837.675	67.0	4.8	-9.3	62.6	Peak [Scan]	H						FUND
17965.932	41.3	8.8	0.7	50.8	Peak [Scan]	V	100	0	54.0	-3.2	Pass	Noise
11652.145	53.7	6.8	-2.3	58.2	Peak Max	H	118	171	74	-15.8	Pass	RB
11652.145	38.8	6.8	-2.3	43.4	Average Max	H	118	171	54	-10.7	Pass	RB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 78 of 333

### 5.1.2.2. ANT-18 60 Degree Sector antenna

Low

<b>Test Freq.</b>	2412 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11b; 1 Mbs	<b>Temp (°C)</b>	23
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	35
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	1001
<b>Antenna</b>	ANT-18 Sector 60 Panel	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

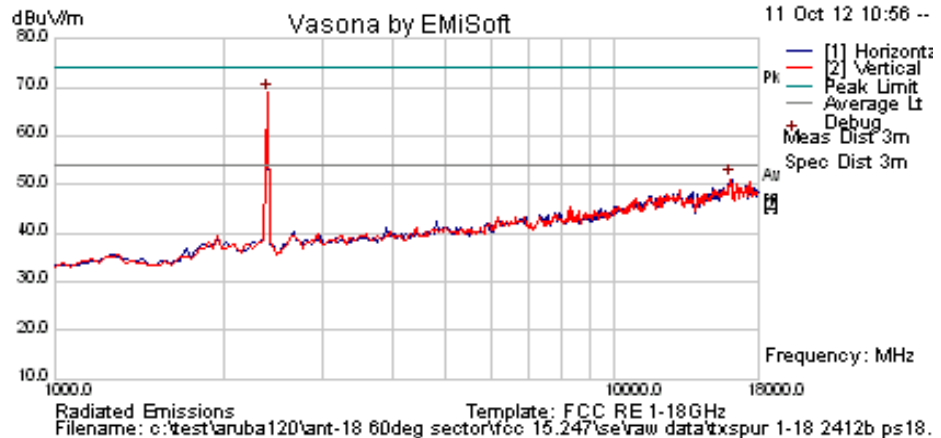

#### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2396.794	77.6	3.0	-11.7	68.9	Peak [Scan]	V						FUND
16024.048	41.9	9.0	0.2	51.2	Peak [Scan]	V	100	0	54.0	-2.8	Pass	Noise


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



11b 2390 MHz Band Edge

Marker 1 [T1] RBW 1 MHz RF Att 20 dB  
Ref Lvl 59.30 dBμV VBW 1 MHz  
95.1 dBμV 2.38807615 GHz SWT 20 s Unit dBμV

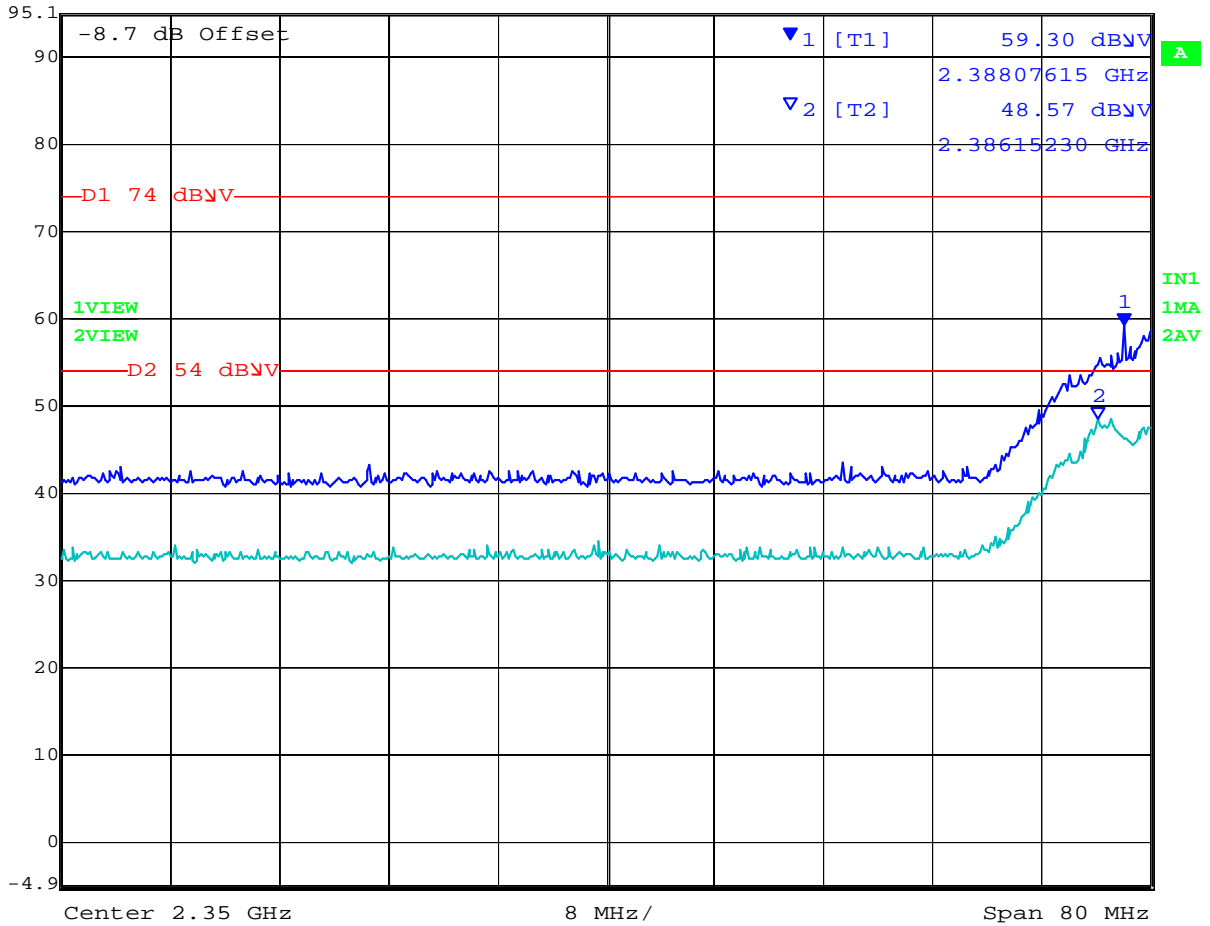

Date: 11.OCT.2012 09:12:00


Power reduction required in order to bring unit into compliance NART = 18



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 80 of 333

Mid

Test Freq.	2437 MHz	Engineer	JMH
Variant	802.11b; 1 Mbs	Temp (°C)	23
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	35
Power Setting	18	Press. (mBars)	1001
Antenna	ANT-18 Sector 60 Panel	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

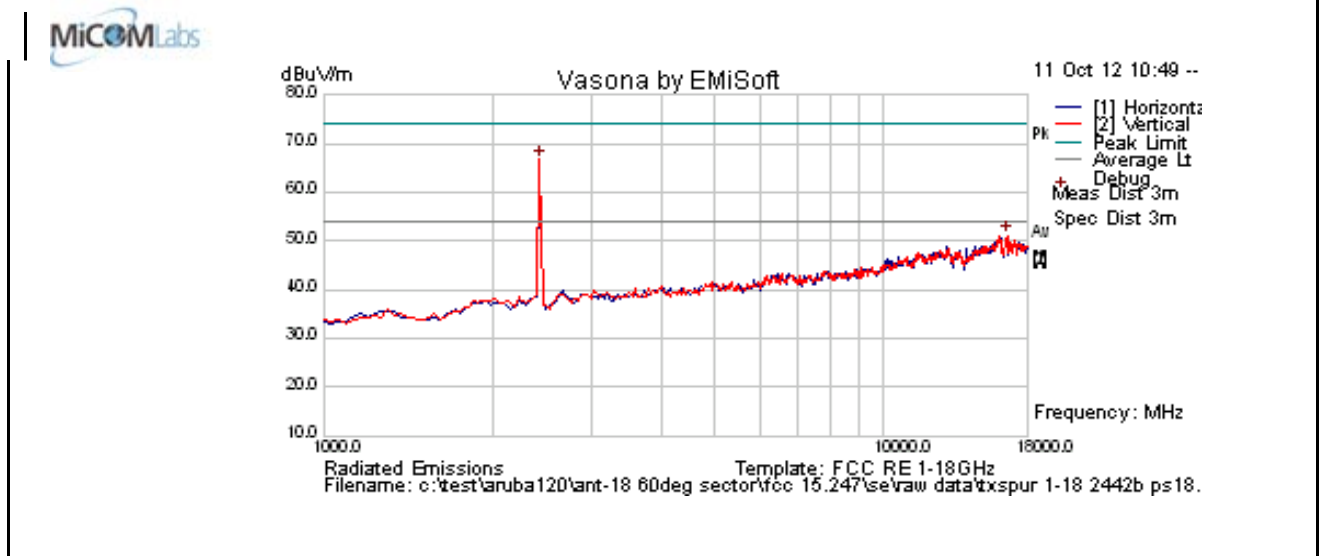

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	75.3	3.0	-11.6	66.7	Peak [Scan]	V						FUND
16569.138	41.8	8.8	0.5	51.1	Peak [Scan]	V	100	0	54.0	-2.9	Pass	Noise
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 81 of 333

High

<b>Test Freq.</b>	2462 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11b; 1 Mbs	<b>Temp (°C)</b>	23
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	35
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	1001
<b>Antenna</b>	ANT-18 Sector 60 Panel	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

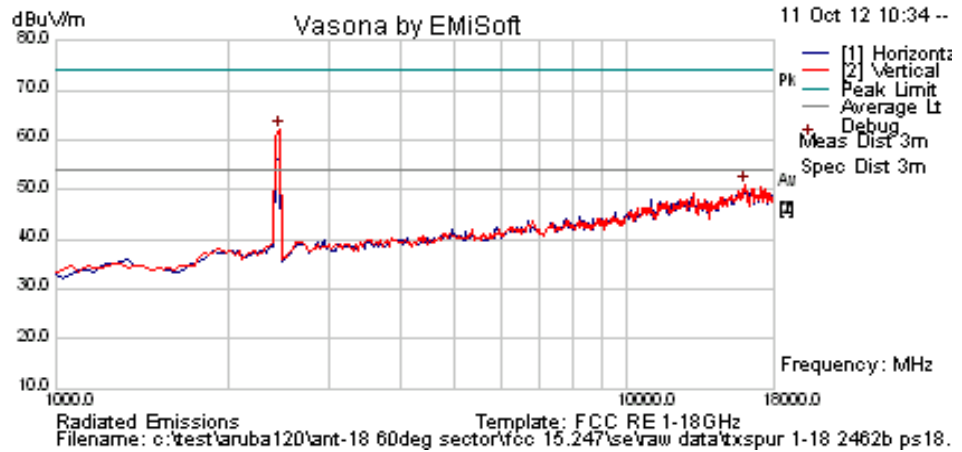

**Formally measured emission peaks**


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2464.930	70.5	3.0	11.5	62.0	Peak [Scan]	V						FUND
15989.98	41.8	9.0	0.1	50.9	Peak [Scan]	V	200	0	54.0	-3.1	Pass	Noise

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



11b 2483.5 MHz Band Edge

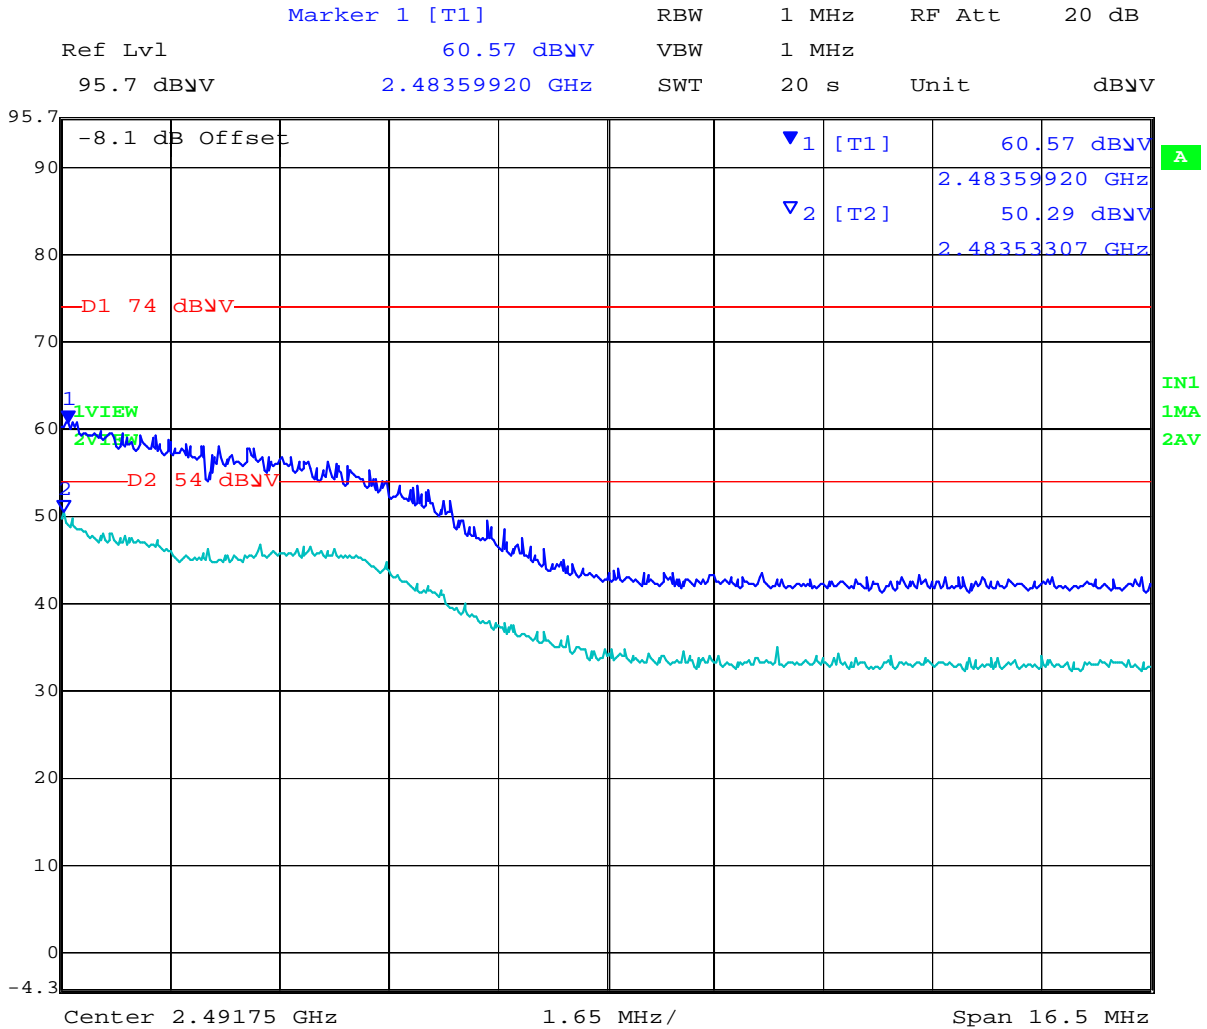

Date: 11.OCT.2012 10:28:28


Power reduction required in order to bring unit into compliance NART = 18



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 83 of 333

Low

<b>Test Freq.</b>	2412 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11g; 6 Mbs	<b>Temp (°C)</b>	23
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	35
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	1001
<b>Antenna</b>	ANT-18 Sector 60 Panel	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

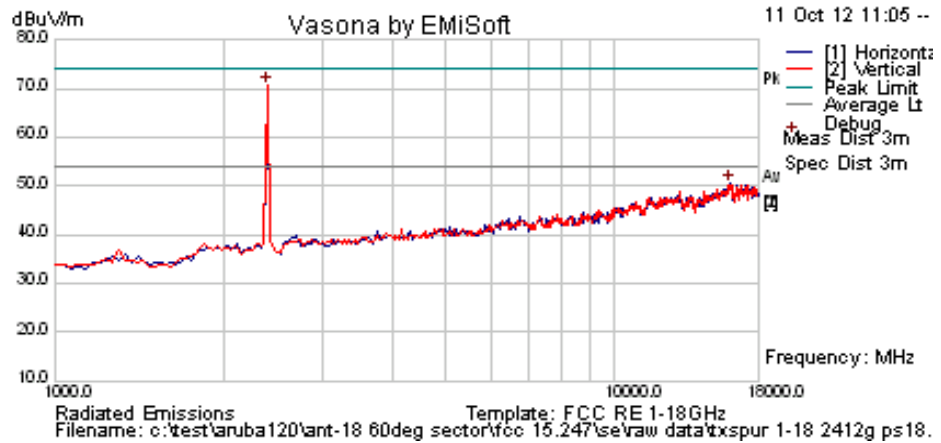

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2396.794	79.2	3.0	11.7	70.5	Peak [Scan]	V						FUND
16058.116	41.3	9.0	0.3	50.6	Peak [Scan]	H	100	0	54.0	-3.5	Pass	Noise


**Legend:** TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 84 of 333

### 11g 2390 MHz Band Edge

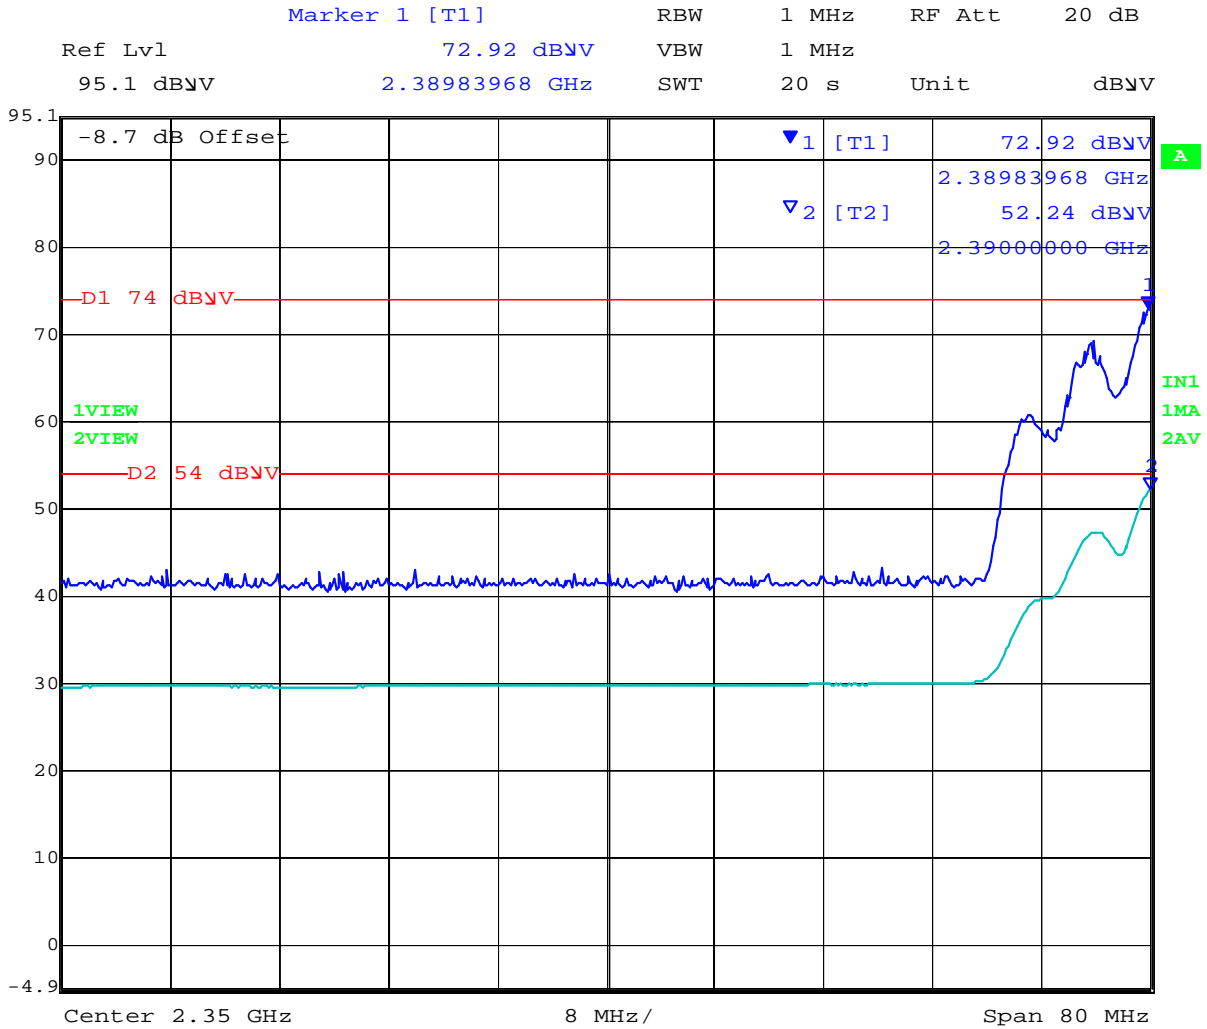

Date: 11.OCT.2012 09:23:46

Power reduction required in order to bring unit into compliance NART = 16


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 85 of 333

Mid

<b>Test Freq.</b>	2437 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11g; 6 Mbs	<b>Temp (°C)</b>	23
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	35
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	1001
<b>Antenna</b>	ANT-18 Sector 60 Panel	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

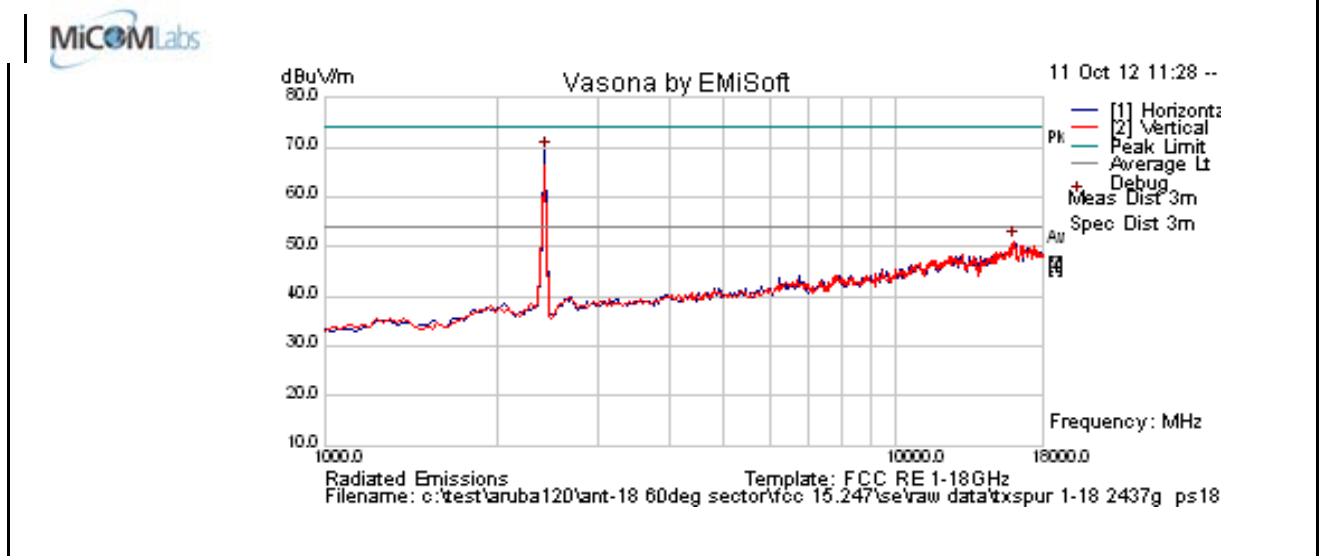

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	77.8	3.0	11.6	69.2	Peak [Scan]	H						FUND
15989.98	42.0	9.0	0.1	51.1	Peak [Scan]	V	150	0	54.0	-2.9	Pass	Noise

Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 86 of 333

High

<b>Test Freq.</b>	2462 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11g; 6 Mbs	<b>Temp (°C)</b>	23
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	35
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	1001
<b>Antenna</b>	ANT-18 Sector 60 Panel	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

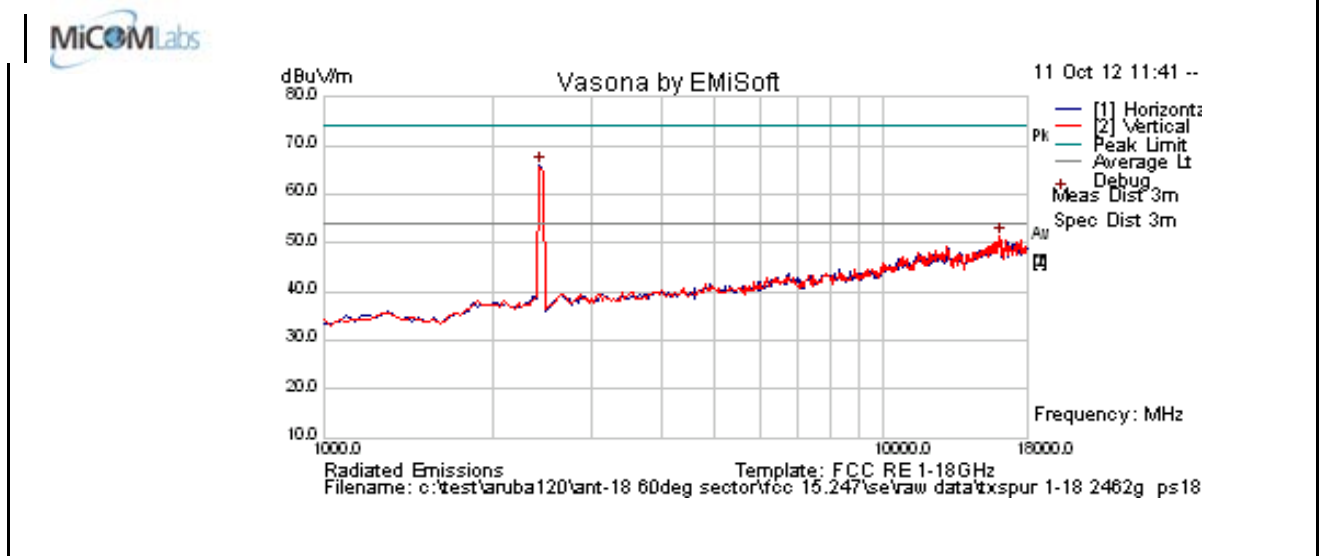

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	74.6	3.0	11.6	66.0	Peak [Scan]	H						FUND
16092.184	42.0	9.0	0.3	51.3	Peak [Scan]	V	200	0	54.0	-2.7	Pass	Noise


Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 87 of 333

### 11g 2483.5 MHz Band Edge

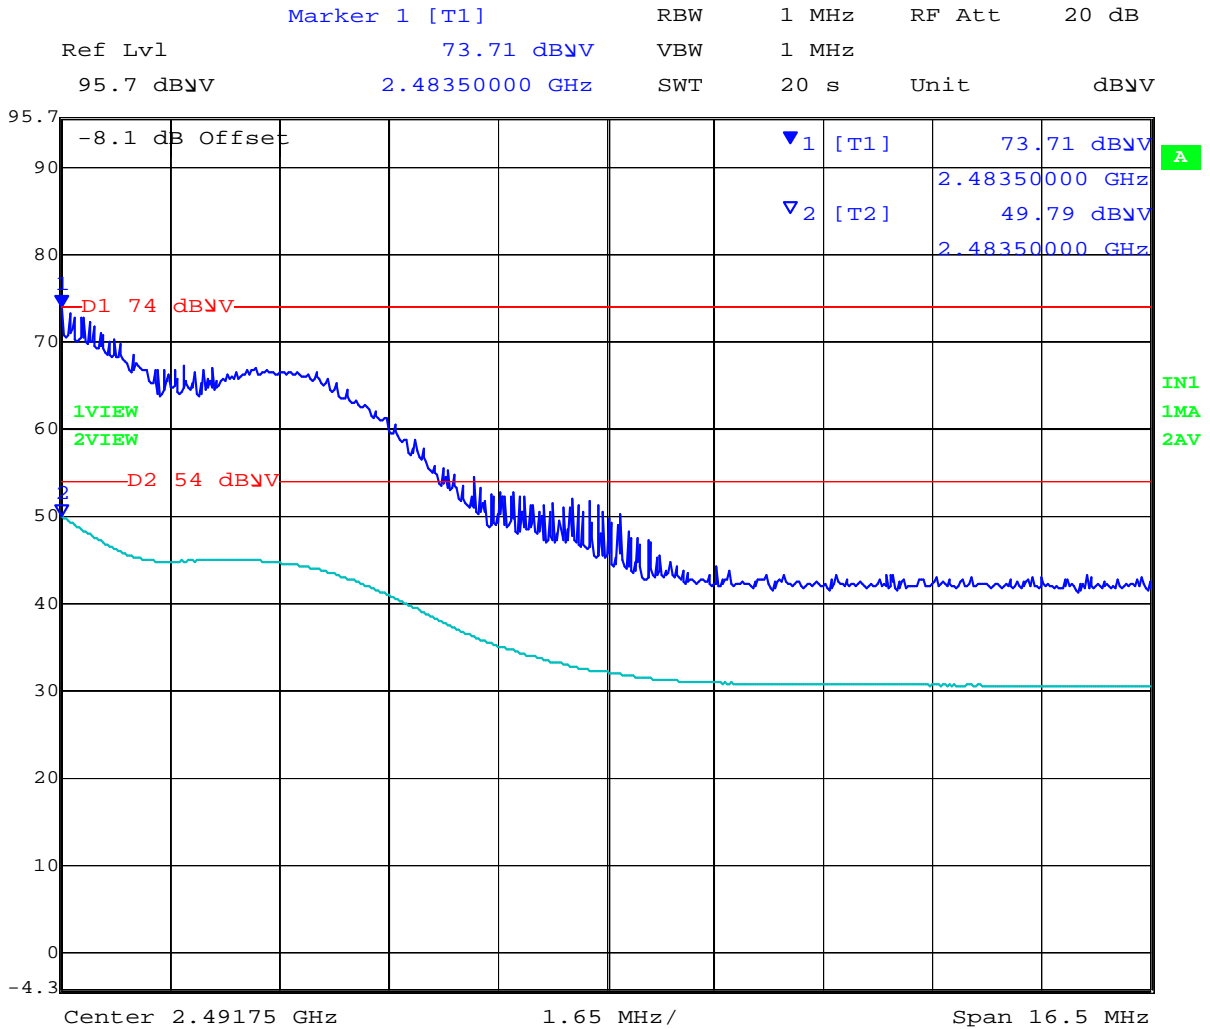

Date: 11.OCT.2012 10:22:44

Power reduction required in order to bring unit into compliance NART = 15.5


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 88 of 333

Low

<b>Test Freq.</b>	2412 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11n; HT-20; 6.5 MCS	<b>Temp (°C)</b>	23
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	35
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	1001
<b>Antenna</b>	ANT-18 Sector 60 Panel	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

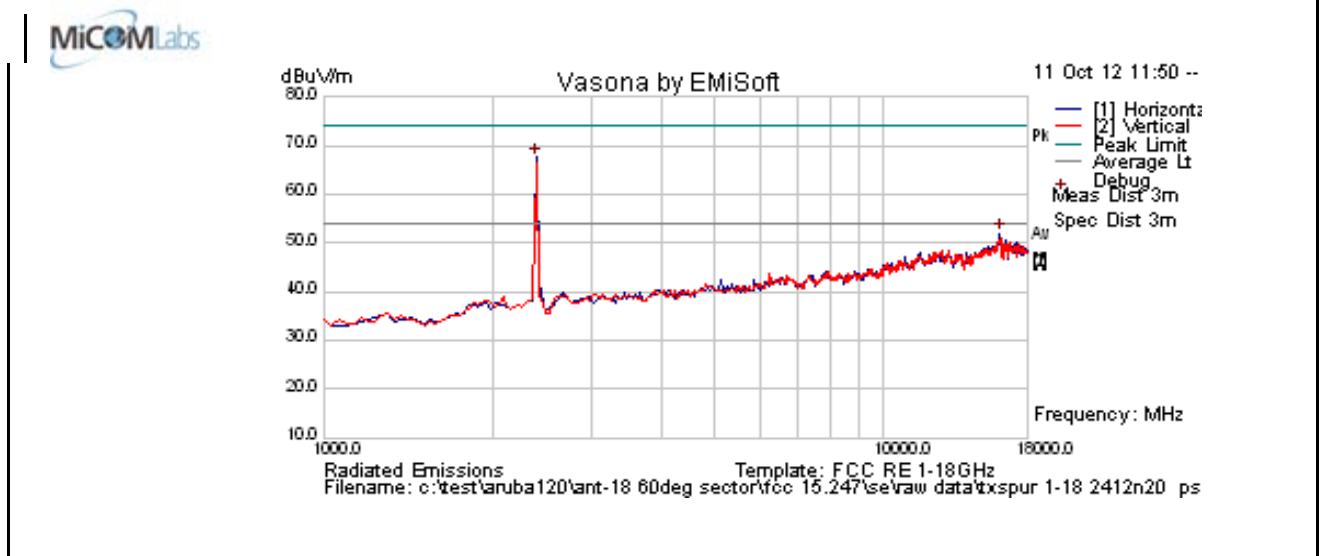

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2396.794	76.4	3.0	11.7	67.7	Peak [Scan]	H						FUND
16092.184	42.6	9.0	0.3	51.9	Peak [Scan]	H	200	0	54.0	-2.1	Pass	Noise

Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





11n HT-20 2390 MHz Band Edge

Marker 1 [T1] RBW 1 MHz RF Att 20 dB  
Ref Lvl 71.18 dBμV VBW 1 MHz  
95.1 dBμV 2.38935872 GHz SWT 20 s Unit dBμV

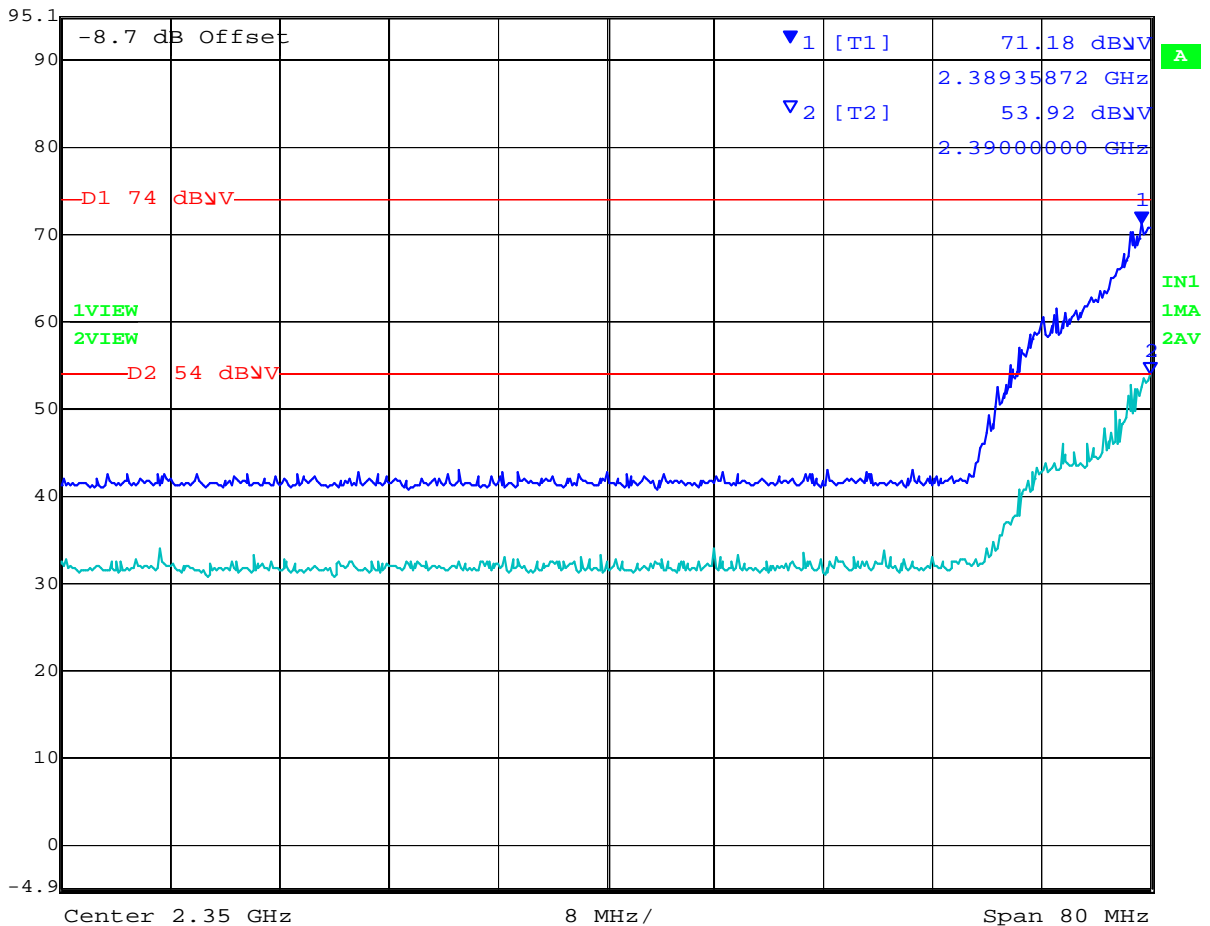

Date: 11.OCT.2012 09:34:30


Power reduction required in order to bring unit into compliance NART = 15



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 90 of 333

Mid

<b>Test Freq.</b>	2437 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11n; HT-20; 6.5 MCS	<b>Temp (°C)</b>	23
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	35
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	1001
<b>Antenna</b>	ANT-18 Sector 60 Panel	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

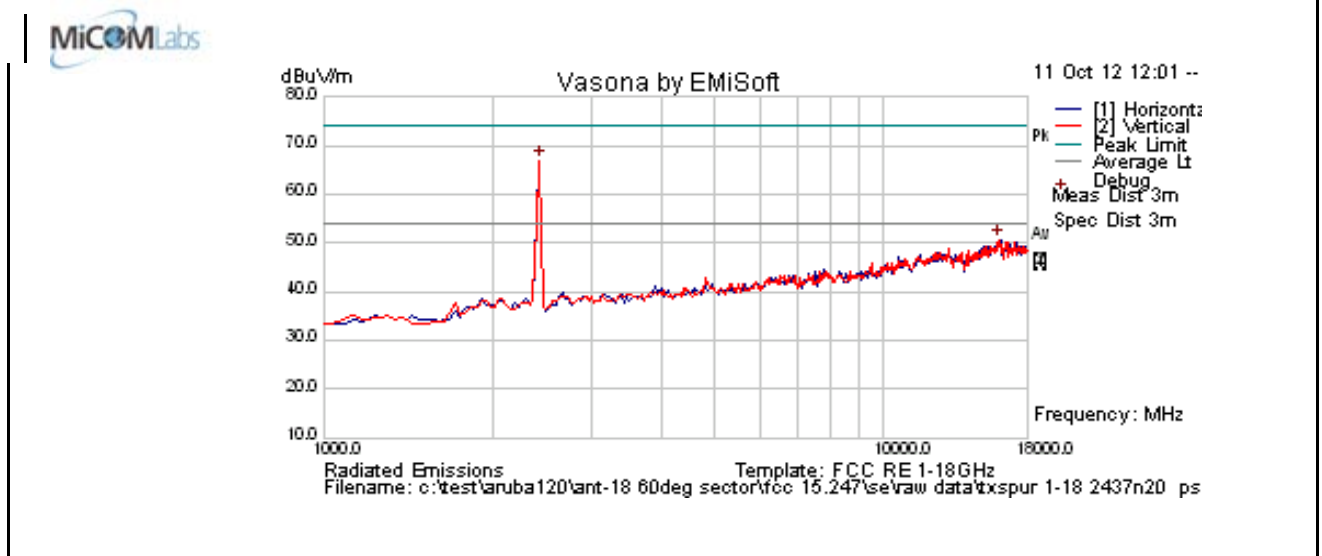

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	75.6	3.0	11.6	67.0	Peak [Scan]	V						FUND
16024.048	41.5	9.0	0.2	50.8	Peak [Scan]	V	200	0	54.0	-3.2	Pass	Noise

Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 91 of 333

High

<b>Test Freq.</b>	2462 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11n; HT-20; 6.5 MCS	<b>Temp (°C)</b>	23
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	35
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	1001
<b>Antenna</b>	ANT-18 Sector 60 Panel	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

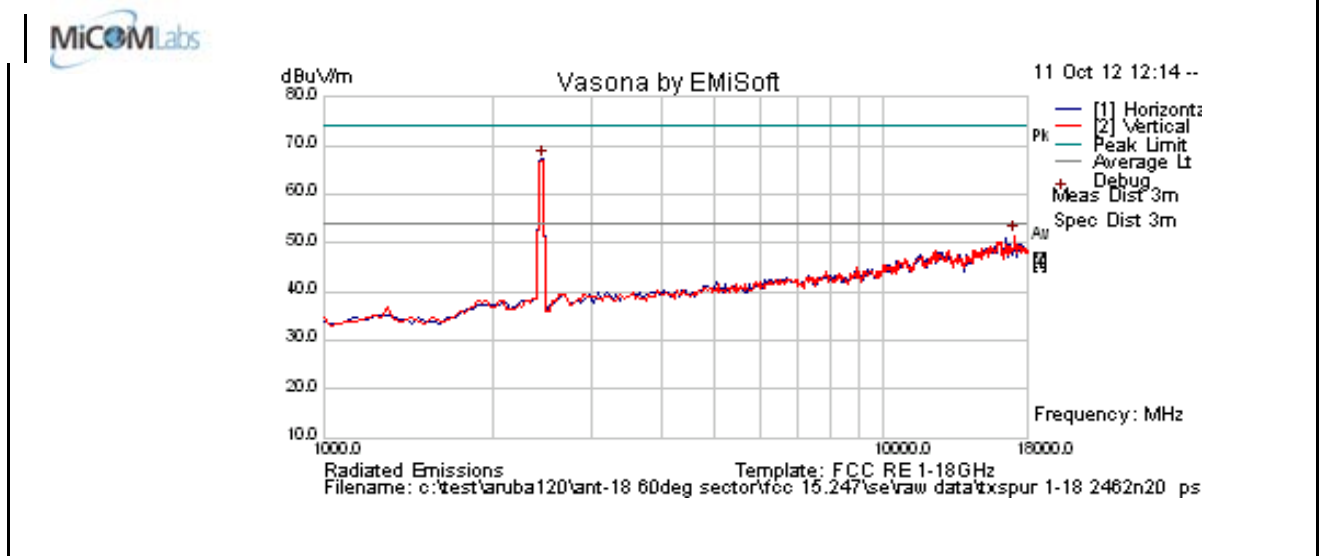

**Formally measured emission peaks**


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2464.930	75.7	3.0	11.5	67.1	Peak [Scan]	H						FUND
17114.228	42.5	8.5	0.5	51.5	Peak [Scan]	V	100	0	54.0	-2.5	Pass	Noise

Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



11n HT-20 2483.5 MHz Band Edge

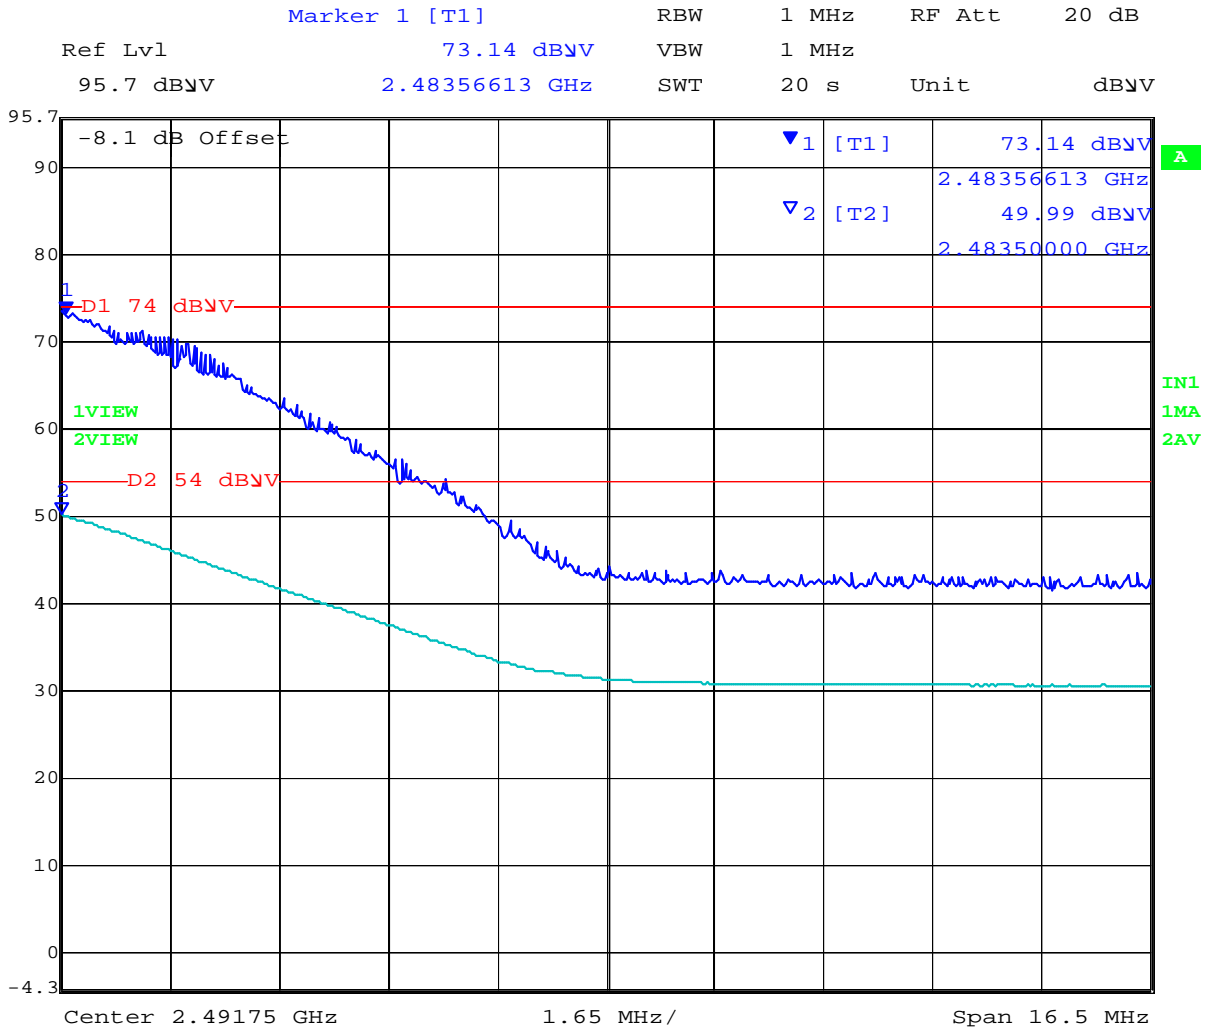

Date: 11.OCT.2012 10:17:43


Power reduction required in order to bring unit into compliance NART = 16



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 93 of 333

Low

<b>Test Freq.</b>	2422 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11n; HT-40; 13.5 MCS	<b>Temp (°C)</b>	23
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	35
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	1001
<b>Antenna</b>	ANT-18 Sector 60 Panel	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

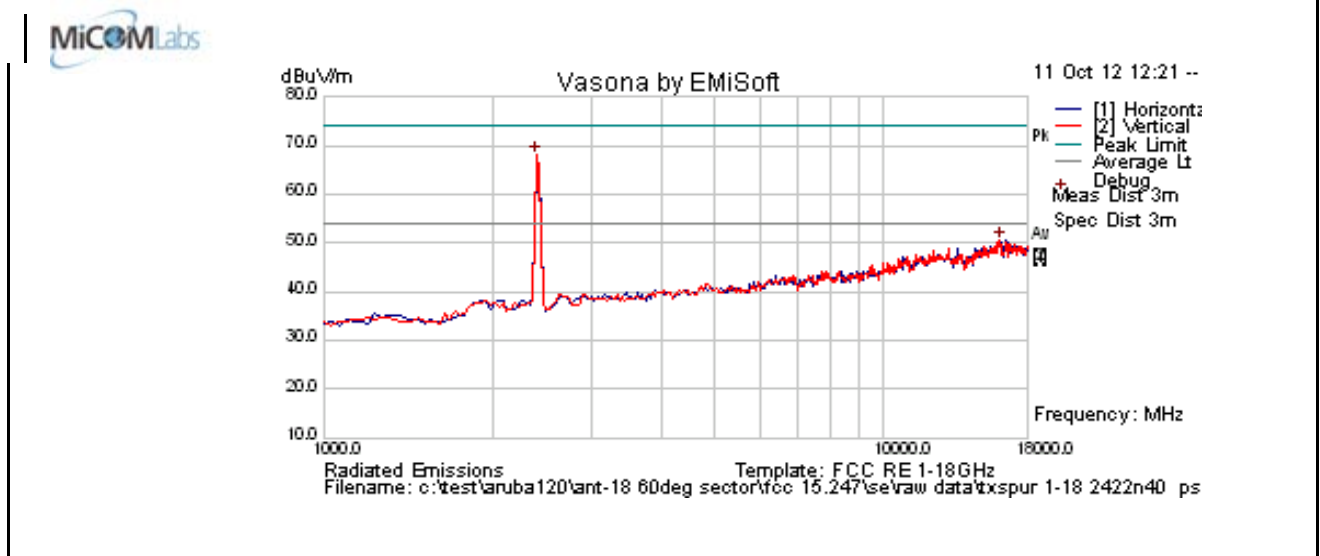

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2396.794	76.6	3.0	11.7	67.9	Peak [Scan]	V						FUND
16092.184	41.3	9.0	0.3	50.5	Peak [Scan]	V	150	0	54.0	-3.5	Pass	Noise

Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 94 of 333

### 11n HT-40 2390 MHz Band Edge

Marker 1 [T1] RBW 1 MHz RF Att 20 dB  
Ref Lvl 72.08 dBµV VBW 1 MHz  
95.1 dBµV 2.39000000 GHz SWT 20 s Unit dBµV

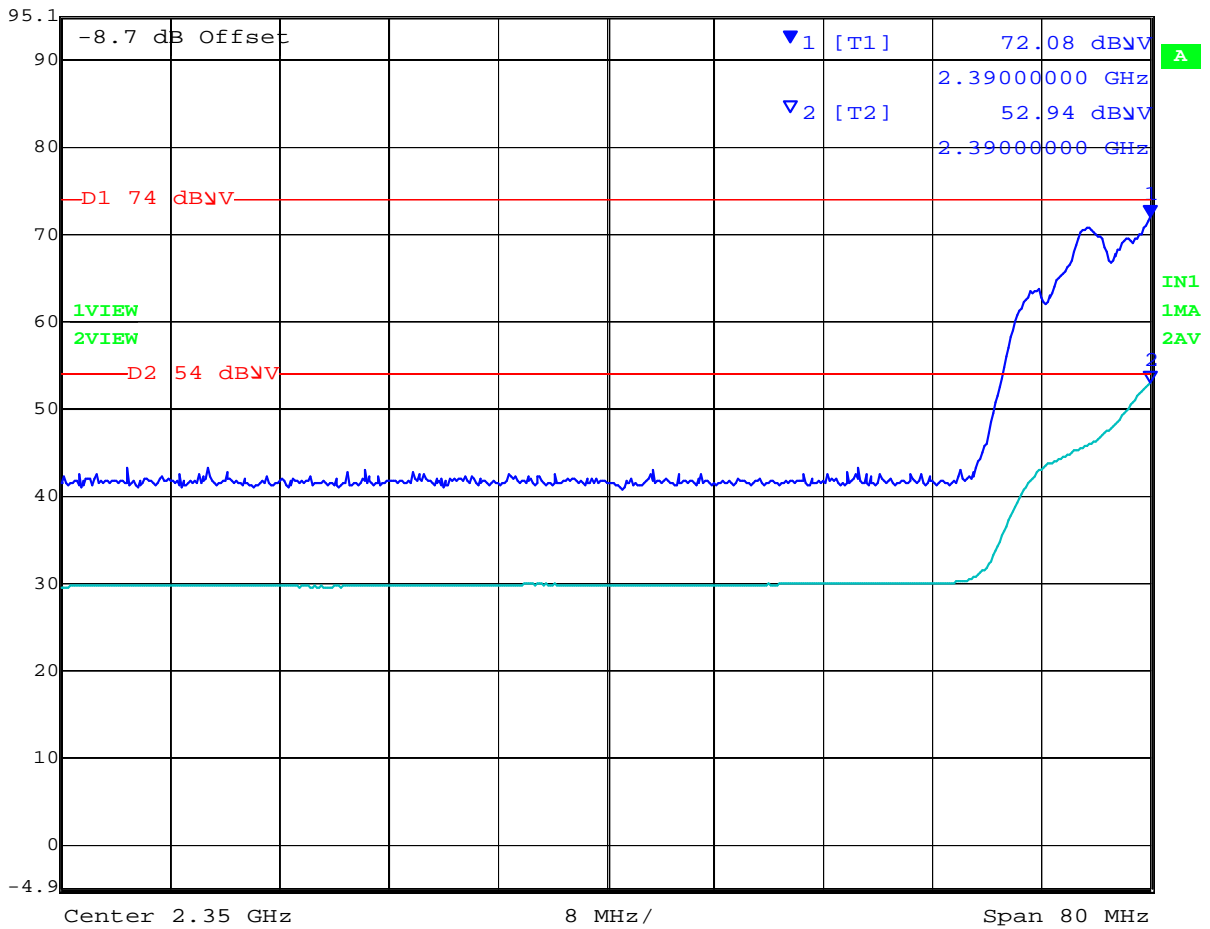

Date: 11.OCT.2012 09:43:24

Power reduction required in order to bring unit into compliance NART = 12.5


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 95 of 333

Mid

<b>Test Freq.</b>	2437 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11n; HT-40; 13.5 MCS	<b>Temp (°C)</b>	23
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	35
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	1001
<b>Antenna</b>	ANT-18 Sector 60 Panel	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

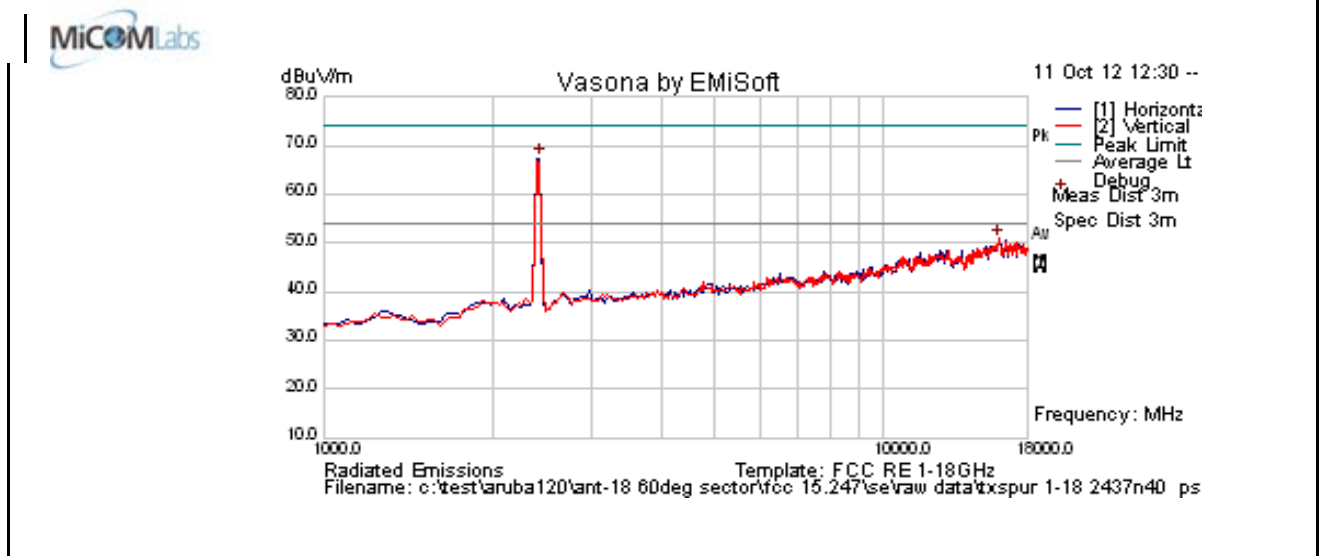

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	75.9	3.0	11.6	67.3	Peak [Scan]	H						FUND
16058.116	41.6	9.0	0.3	50.9	Peak [Scan]	V	150	0	54.0	-3.1	Pass	Noise

Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 96 of 333

High

<b>Test Freq.</b>	2452 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11n; HT-40; 13.5 MCS	<b>Temp (°C)</b>	23
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	35
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	1001
<b>Antenna</b>	ANT-18 Sector 60 Panel	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

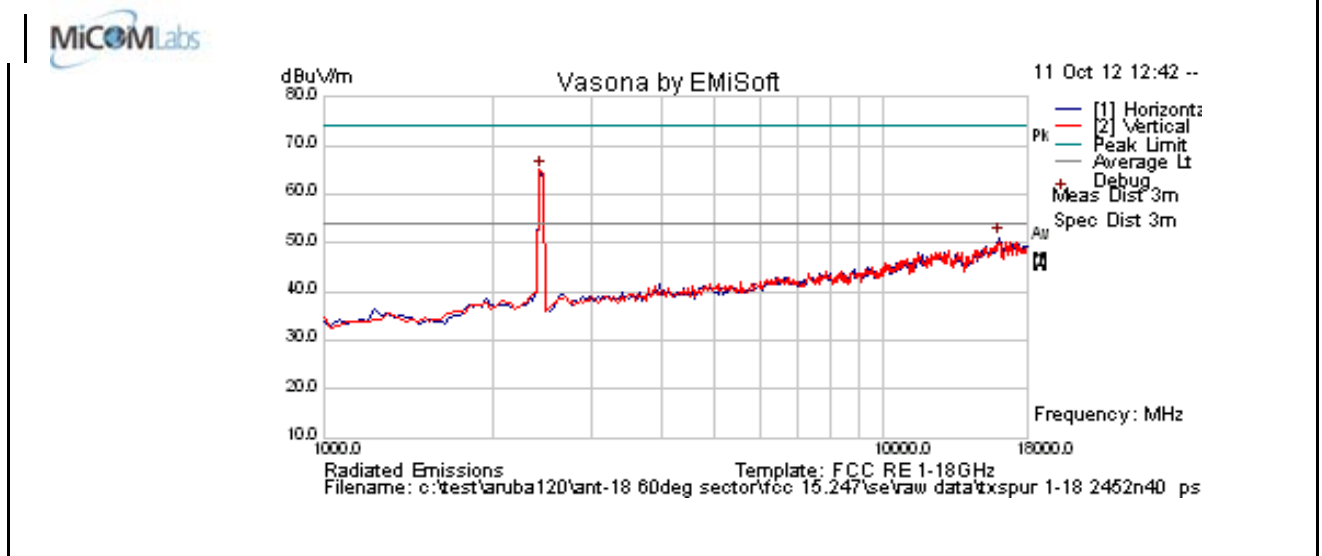

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	73.7	3.0	11.6	65.1	Peak [Scan]	V						FUND
15989.98	42.0	9.0	0.1	51.2	Peak [Scan]	H	100	0	54.0	-2.8	Pass	Noise

Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 97 of 333

### 11n HT-40 2483.5 MHz Band Edge

Marker 1 [T1] RBW 1 MHz RF Att 20 dB  
Ref Lvl 73.78 dB $\mu$ V VBW 1 MHz  
95.7 dB $\mu$ V 2.48369840 GHz SWT 20 s Unit dB $\mu$ V

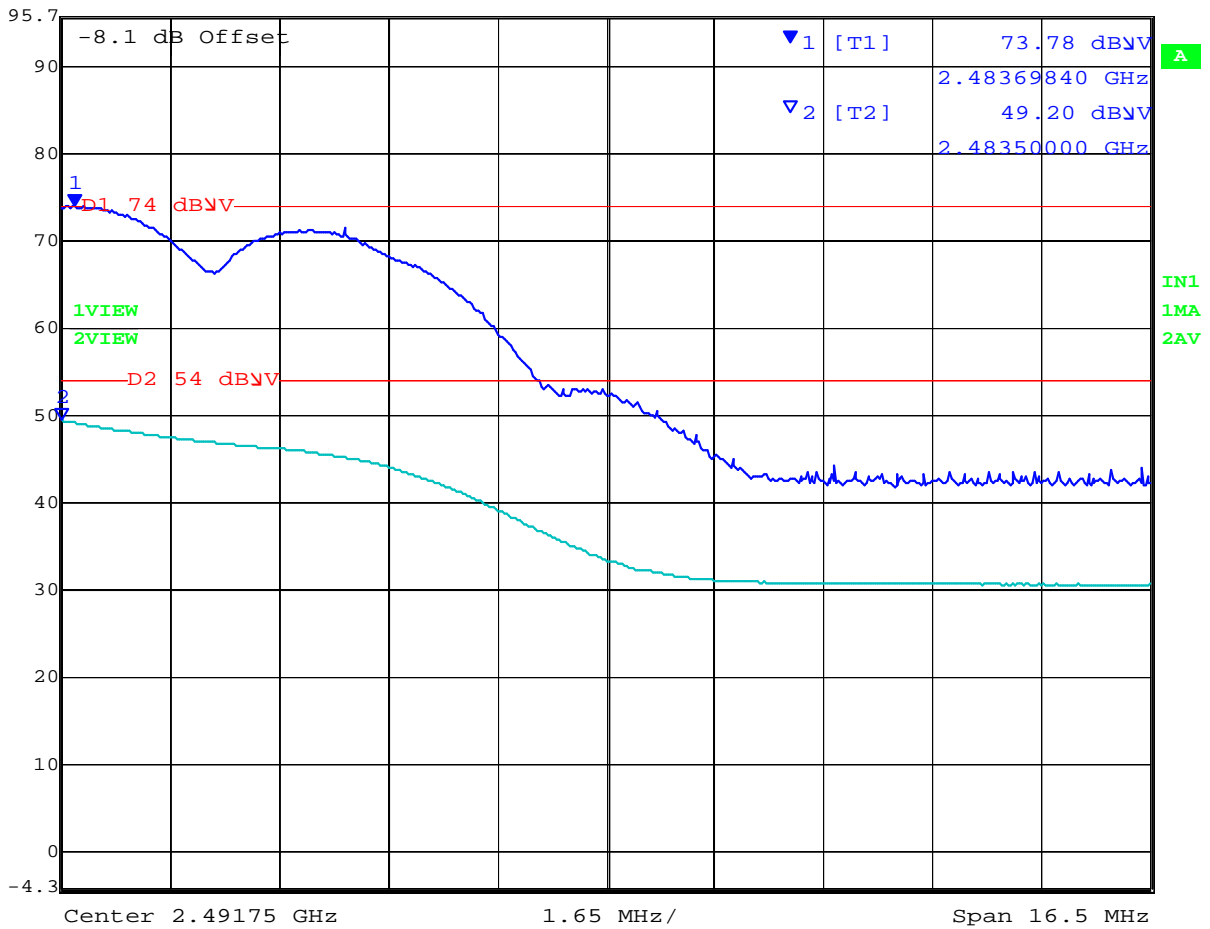

Date: 11.OCT.2012 10:10:30

Power reduction required in order to bring unit into compliance NART = 13.5


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 98 of 333

5G low

Test Freq.	5745 MHz	Engineer	JMH
Variant	802.11a; 6.5 Mbs	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	996
Antenna	ANT-18 Sector 60 deg Panel	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

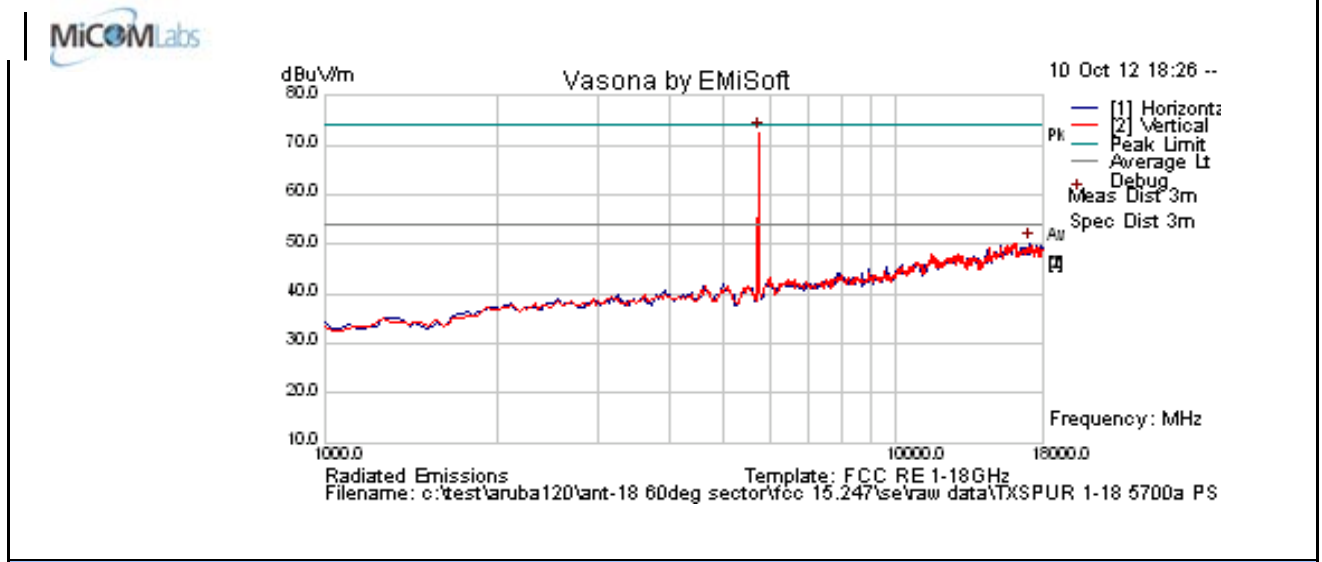

Formally measured emission peaks												
Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5735.471	77.4	4.8	-9.5	72.6	Peak [Scan]	V						FUND
17114.228	41.2	8.5	0.5	50.2	Peak [Scan]	H	100	0	54.0	-3.8	Pass	
Legend:		TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak										


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 99 of 333

### 11a 5350 MHz Band Edge

Marker 1 [T1] RBW 1 MHz RF Att 20 dB  
Ref Lvl 55.22 dBµV VBW 1 MHz  
98.9 dBµV 5.37182365 GHz SWT 20 s Unit dBµV

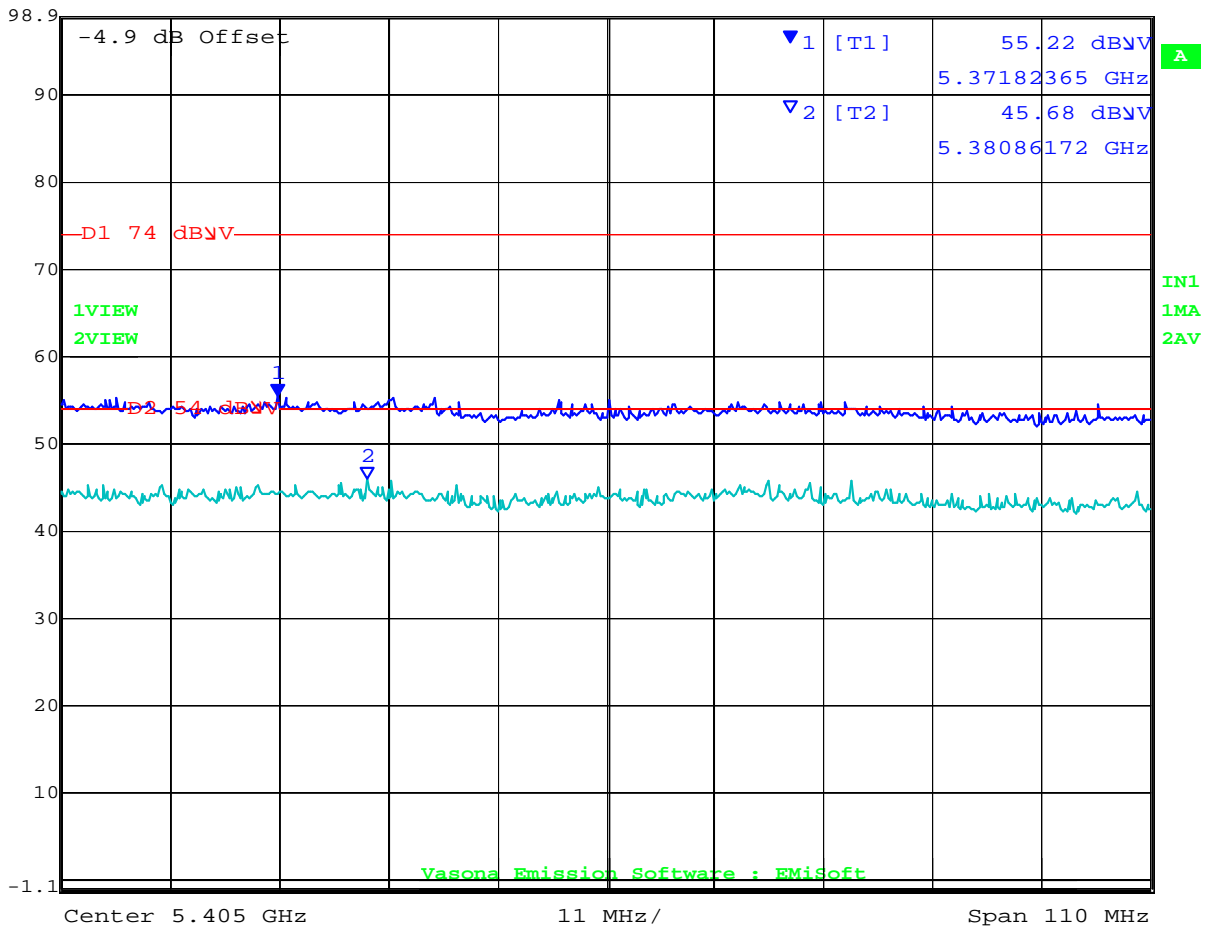

Date: 11.OCT.2012 07:51:25

Power reduction required in order to bring unit into compliance NART = 18


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 100 of 333

5G Mid

Test Freq.	5785 MHz	Engineer	JMH
Variant	802.11a; 6.5 Mbs	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	996
Antenna	ANT-18 Sector 60 deg Panel	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

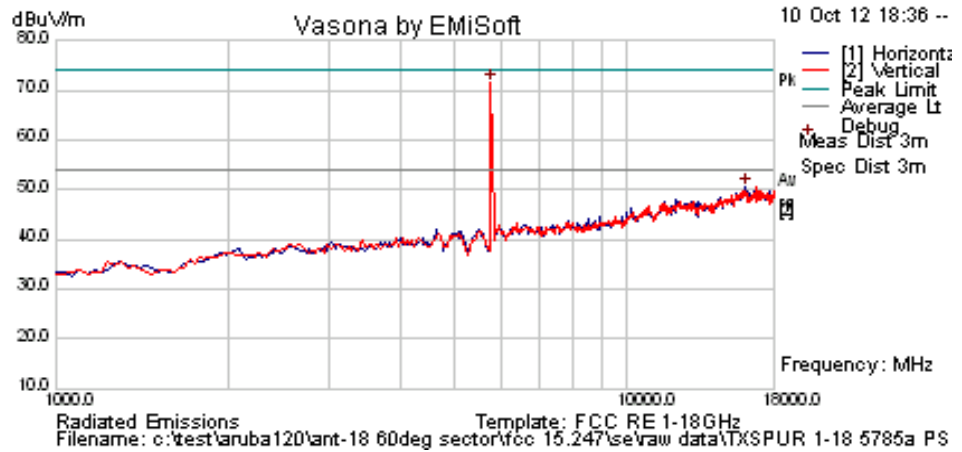

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5769.539	76.2	4.8	-9.5	71.5	Peak [Scan]	V						FUND
16092.184	41.2	9.0	0.3	50.5	Peak [Scan]	H	150	0	54.0	-3.5	Pass	
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak											


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 101 of 333

5G High

Test Freq.	5825 MHz	Engineer	JMH
Variant	802.11a; 6.5 Mbs	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	996
Antenna	ANT-18 Sector 60 deg Panel	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

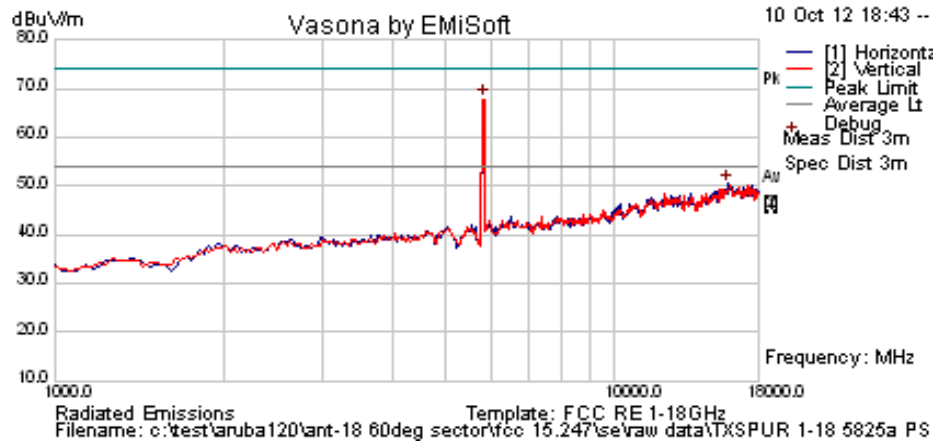

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5837.675	72.2	4.8	-9.3	67.8	Peak [Scan]	V						FUND
15921.844	41.6	8.9	-0.1	50.4	Peak [Scan]	H	100	0	54.0	-3.6	Pass	Noise

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 102 of 333

5G low

Test Freq.	5745 MHz	Engineer	JMH
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	996
Antenna	ANT-18 Sector 60 deg Panel	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

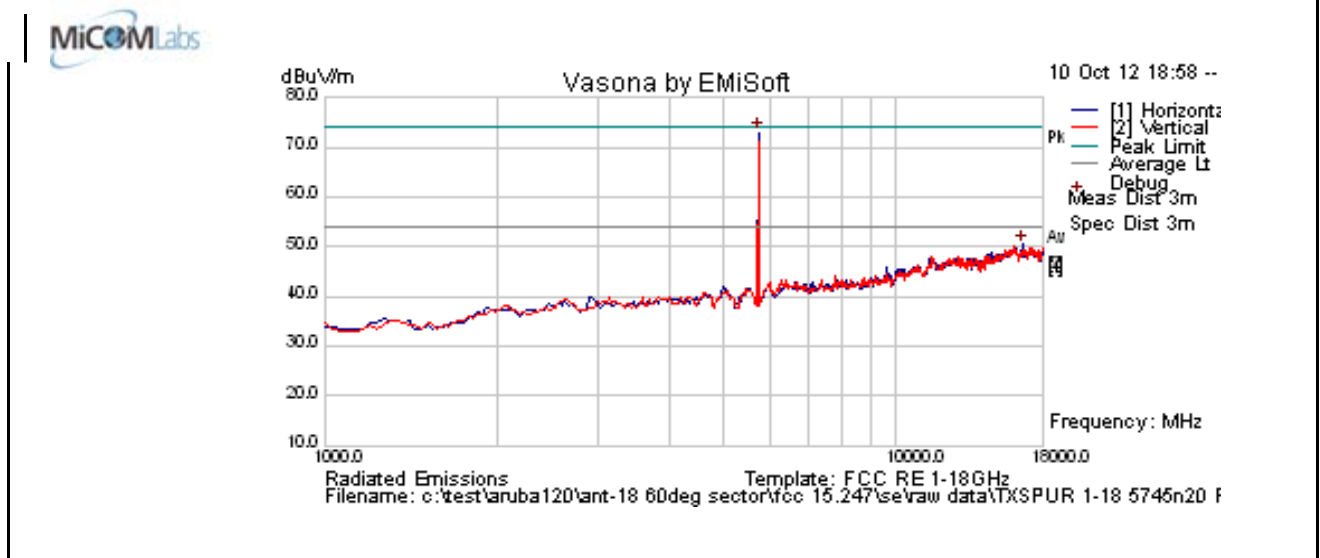

**Formally measured emission peaks**


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5735.471	77.7	4.8	-9.5	72.9	Peak [Scan]	H						FUND
16637.275	41.0	8.7	0.6	50.4	Peak [Scan]	H	200	0	54.0	-3.7	Pass	Noise

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



11n HT-20 5350 MHz Band Edge

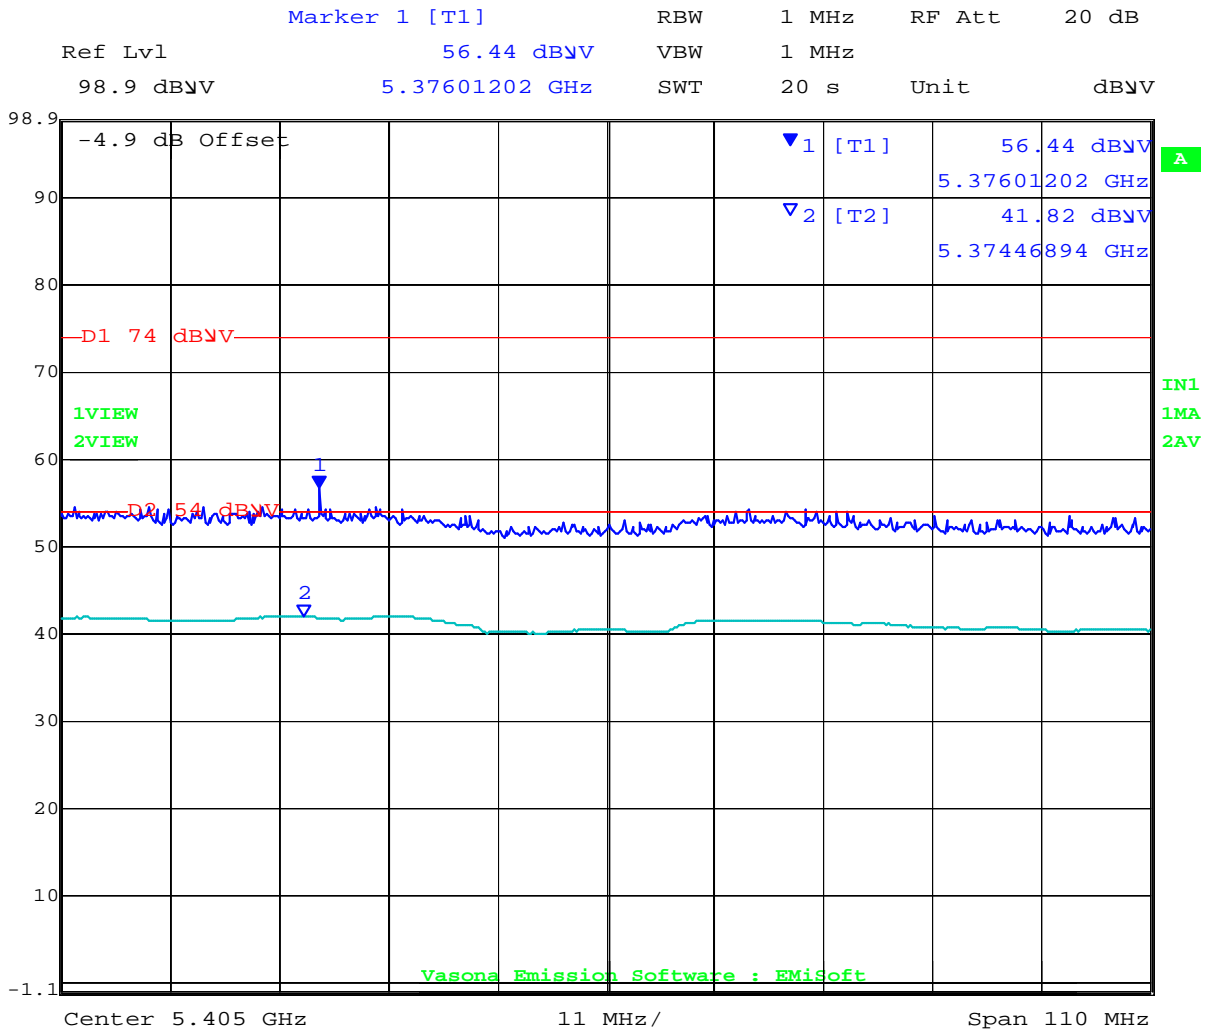

Date: 11.OCT.2012 07:54:36


Power reduction required in order to bring unit into compliance NART = 18



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 104 of 333

5G Mid

Test Freq.	5785 MHz	Engineer	JMH
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	996
Antenna	ANT-18 Sector 60 deg Panel	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

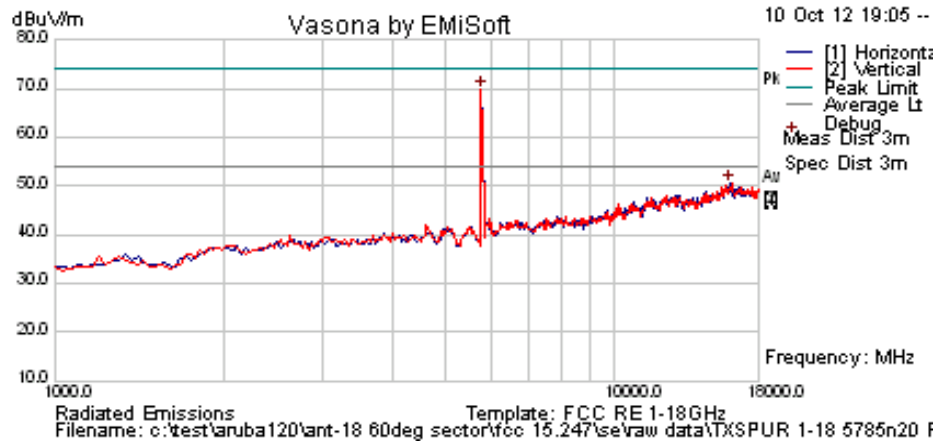

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5769.539	74.5	4.8	-9.5	69.8	Peak [Scan]	V						FUND
15989.98	41.3	9.0	0.1	50.4	Peak [Scan]	H	100	0	54.0	-3.6	Pass	Noise

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.






**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 105 of 333

5G High

Test Freq.	5825 MHz	Engineer	JMH
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	996
Antenna	ANT-18 Sector 60 deg Panel	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

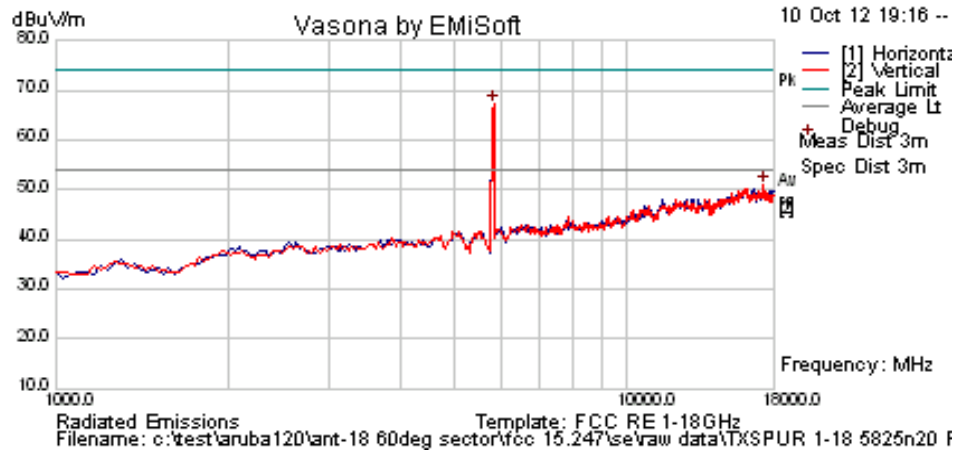

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5837.675	71.6	4.8	-9.3	67.2	Peak [Scan]	V						FUND
17284.569	41.2	8.6	1.1	50.9	Peak [Scan]	V	150	0	54.0	-3.1	Pass	Noise

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 106 of 333

5G low

<b>Test Freq.</b>	5755 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11n; HT-40; 13.5 MCS	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	996
<b>Antenna</b>	ANT-18 Sector 60 Panel	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

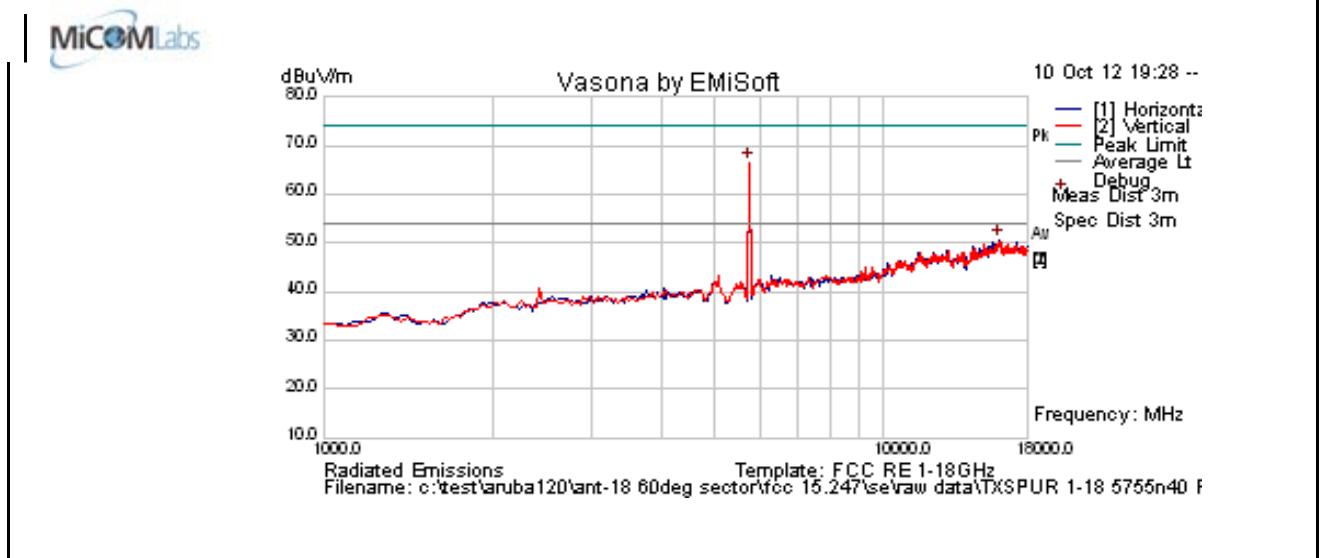

**Formally measured emission peaks**


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5735.471	71.3	4.8	-9.5	66.5	Peak [Scan]	H						FUND
16024.048	41.4	9.0	0.2	50.6	Peak [Scan]	H	100	0	54.0	-3.4	Pass	Noise

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



11n HT-40 5350 MHz Band Edge

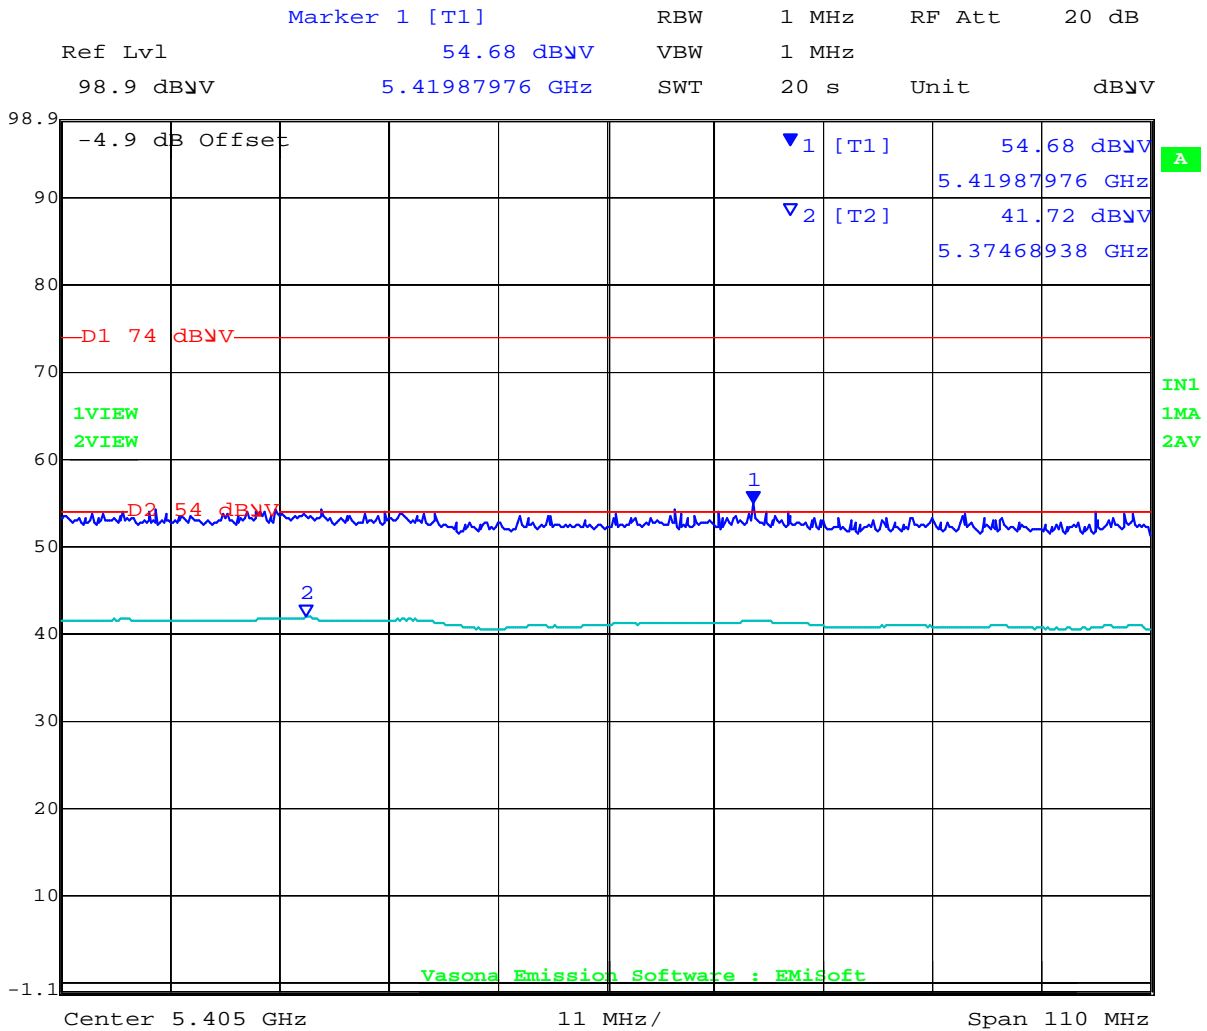

Date: 11.OCT.2012 07:56:47


Power reduction required in order to bring unit into compliance NART = 18



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 108 of 333

5G Mid

Test Freq.	5785 MHz	Engineer	JMH
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	24
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	996
Antenna	ANT-18 Sector 60 Panel	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

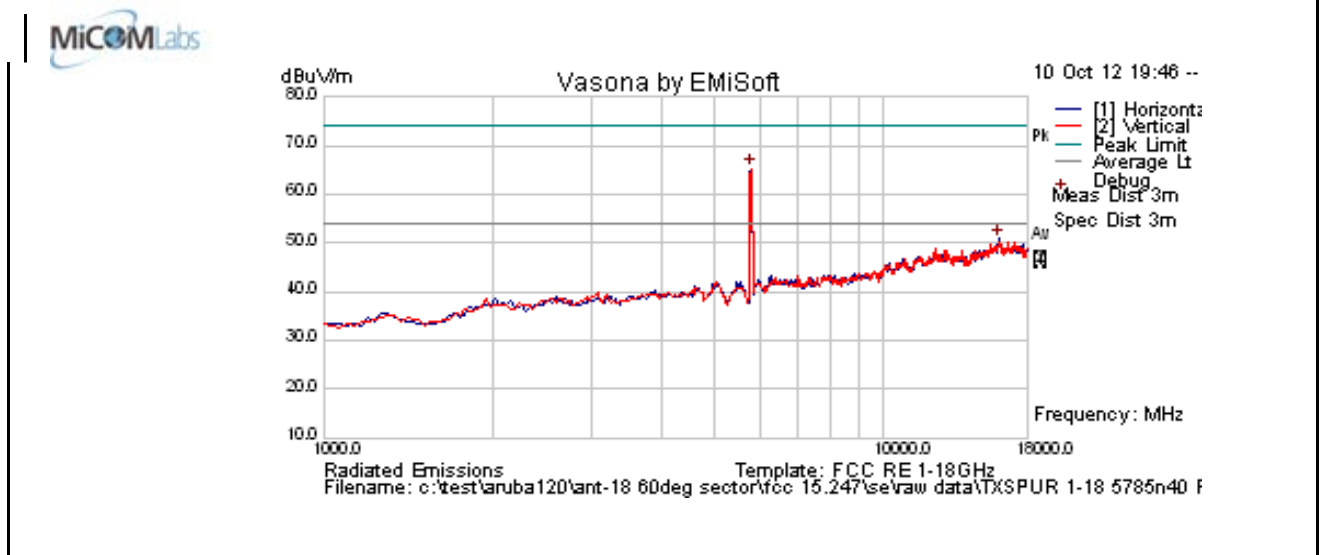

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5803.607	69.8	4.8	-9.4	65.2	Peak [Scan]	V						FUND
15989.98	41.9	9.0	0.1	51.0	Peak [Scan]	H	200	0	54.0	-3.0	Pass	Noise
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 109 of 333

5G High

<b>Test Freq.</b>	5815 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	802.11n; HT-40; 13.5 MCS	<b>Temp (°C)</b>	24
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	30	<b>Press. (mBars)</b>	996
<b>Antenna</b>	ANT-18 Sector 60 Panel	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

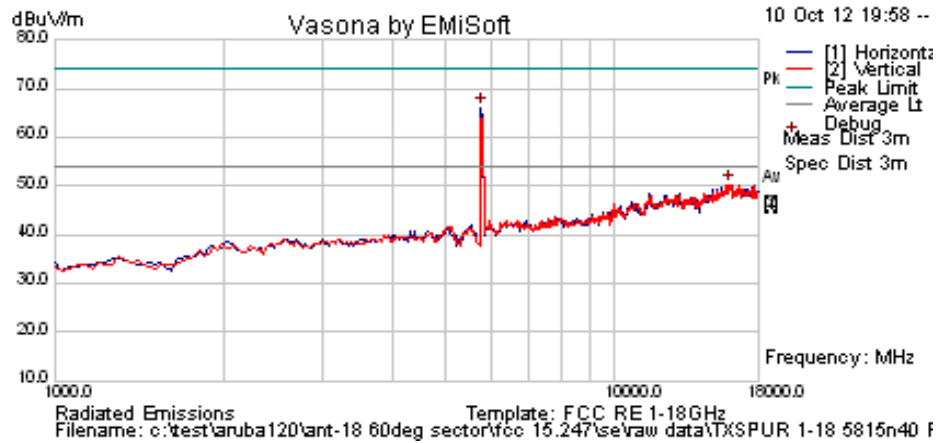

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5769.539	70.8	4.8	-9.5	66.1	Peak [Scan]	H						FUND
16024.048	41.1	9.0	0.2	50.3	Peak [Scan]	H	200	0	54.0	-3.7	Pass	Noise

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission  
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 110 of 333

### 5.1.2.3. ANT-19 Monopole antenna

Low

<b>Test Freq.</b>	2412 MHz	<b>Engineer</b>	jmh
<b>Variant</b>	802.11b; 1 Mbs	<b>Temp (°C)</b>	25
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	32
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Integral	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

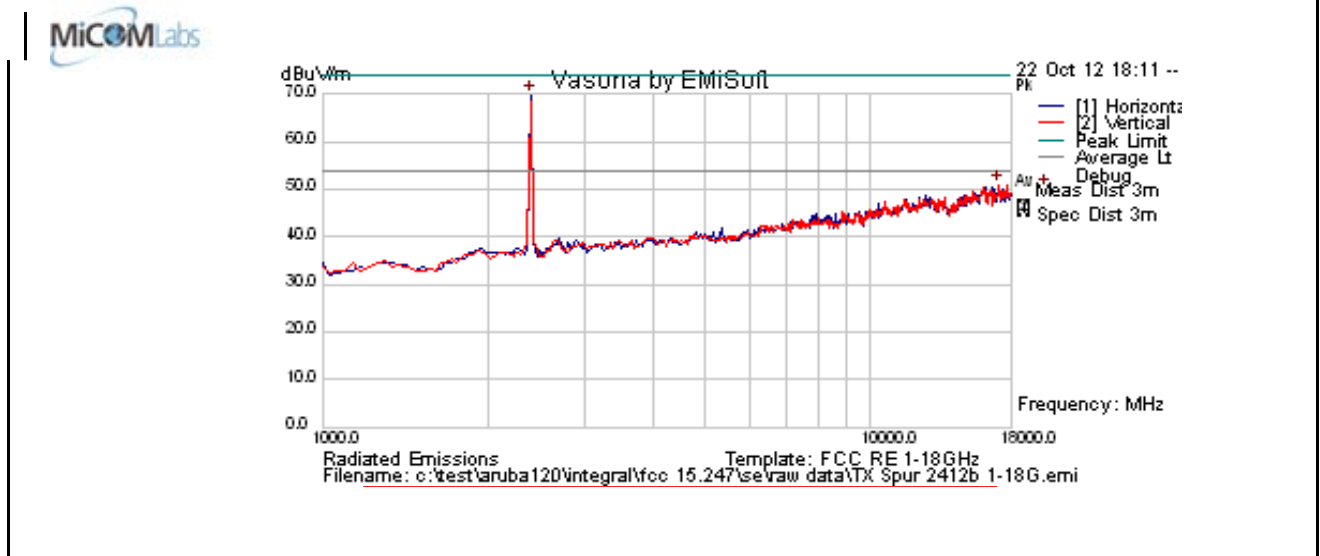

#### Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2396.794	78.6	3.0	-11.7	69.9	Peak [Scan]	H						FUND
17080.16	42.1	8.5	0.4	50.9	Peak [Scan]	V	150	0	54.0	-3.1	Pass	Noise
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 111 of 333

### 11b 2390 MHz Band Edge

 **Marker 1 [T1]** RBW 1 MHz RF Att 30 dB  
Ref Lvl 51.52 dBµV VBW 1 MHz  
100 dBµV 2.38543086 GHz SWT 20 s Unit dBµV

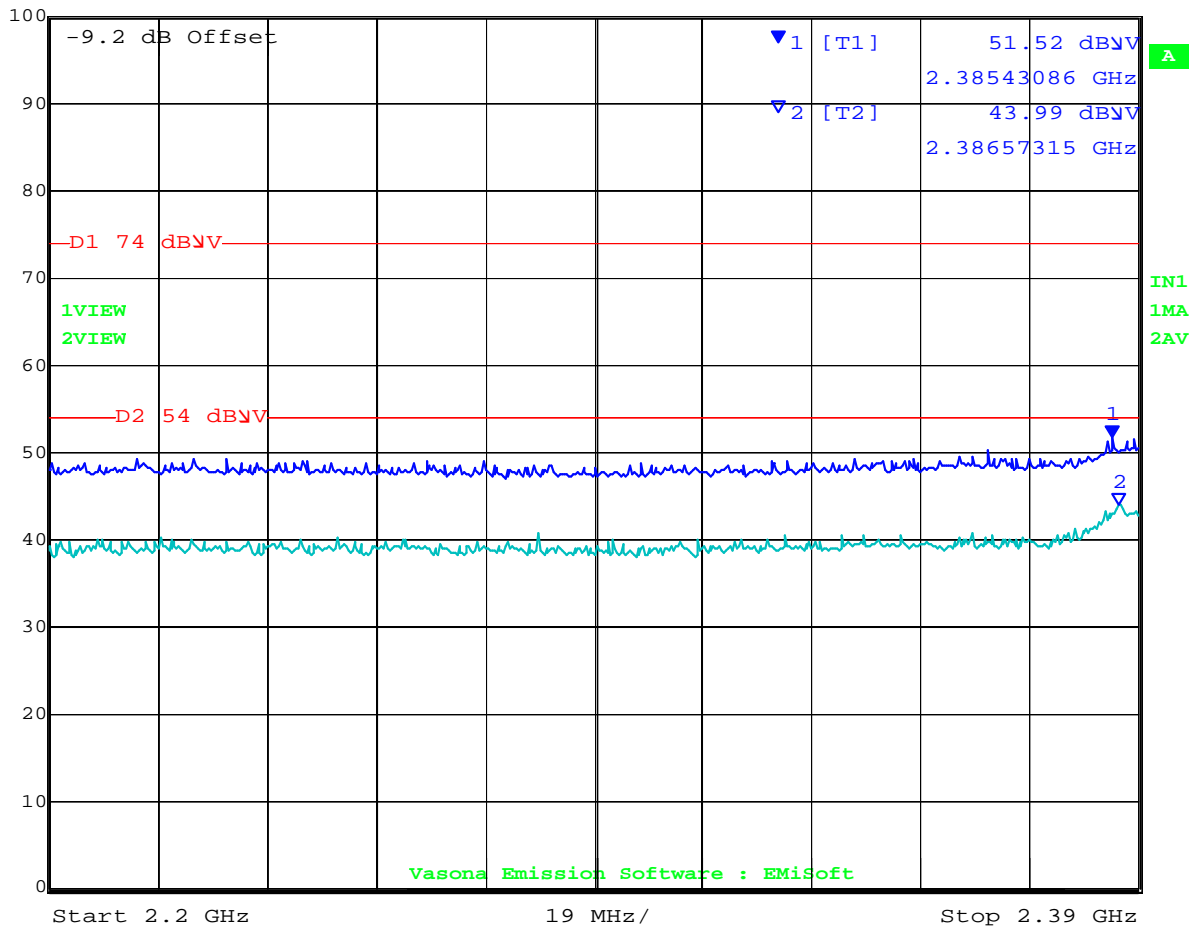

Date: 22.OCT.2012 18:48:00

Power reduction required in order to bring unit into compliance NART = 18


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR108, APINR109 Wireless AP  
To: FCC 47 CFR Part 15.247 & IC RSS-210  
Serial #: ARUB120-U1 Rev A  
Issue Date: 28th November 2012  
Page: 112 of 333

### 11g 2390 MHz Band Edge

 Marker 2 [T2] RBW 1 MHz RF Att 30 dB  
Ref Lvl 53.80 dBµV VBW 1 MHz  
100 dBµV 2.38923848 GHz SWT 20 s Unit dBµV

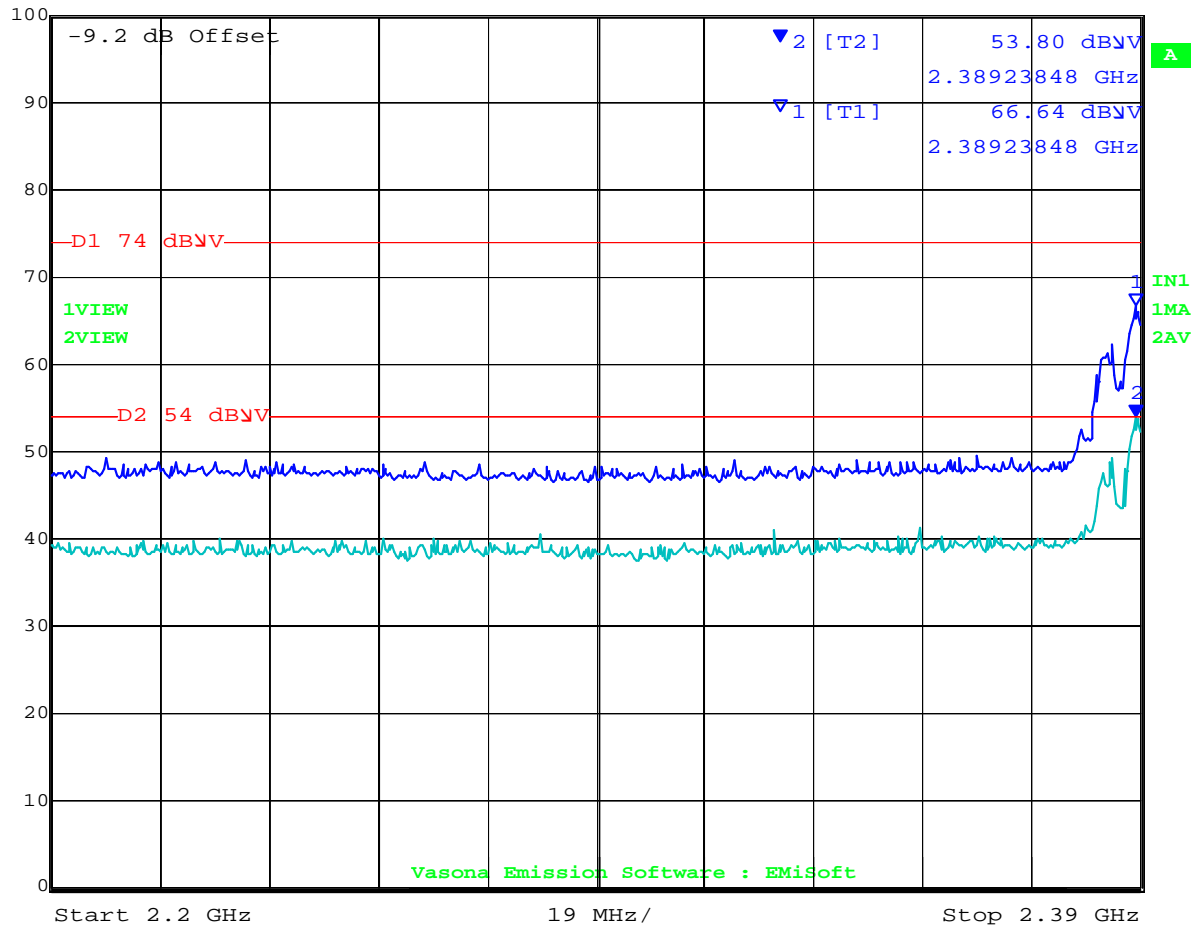

Date: 22.OCT.2012 18:53:01


Power reduction required in order to bring unit into compliance NART = 18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





11n HT-20 2390 MHz Band Edge

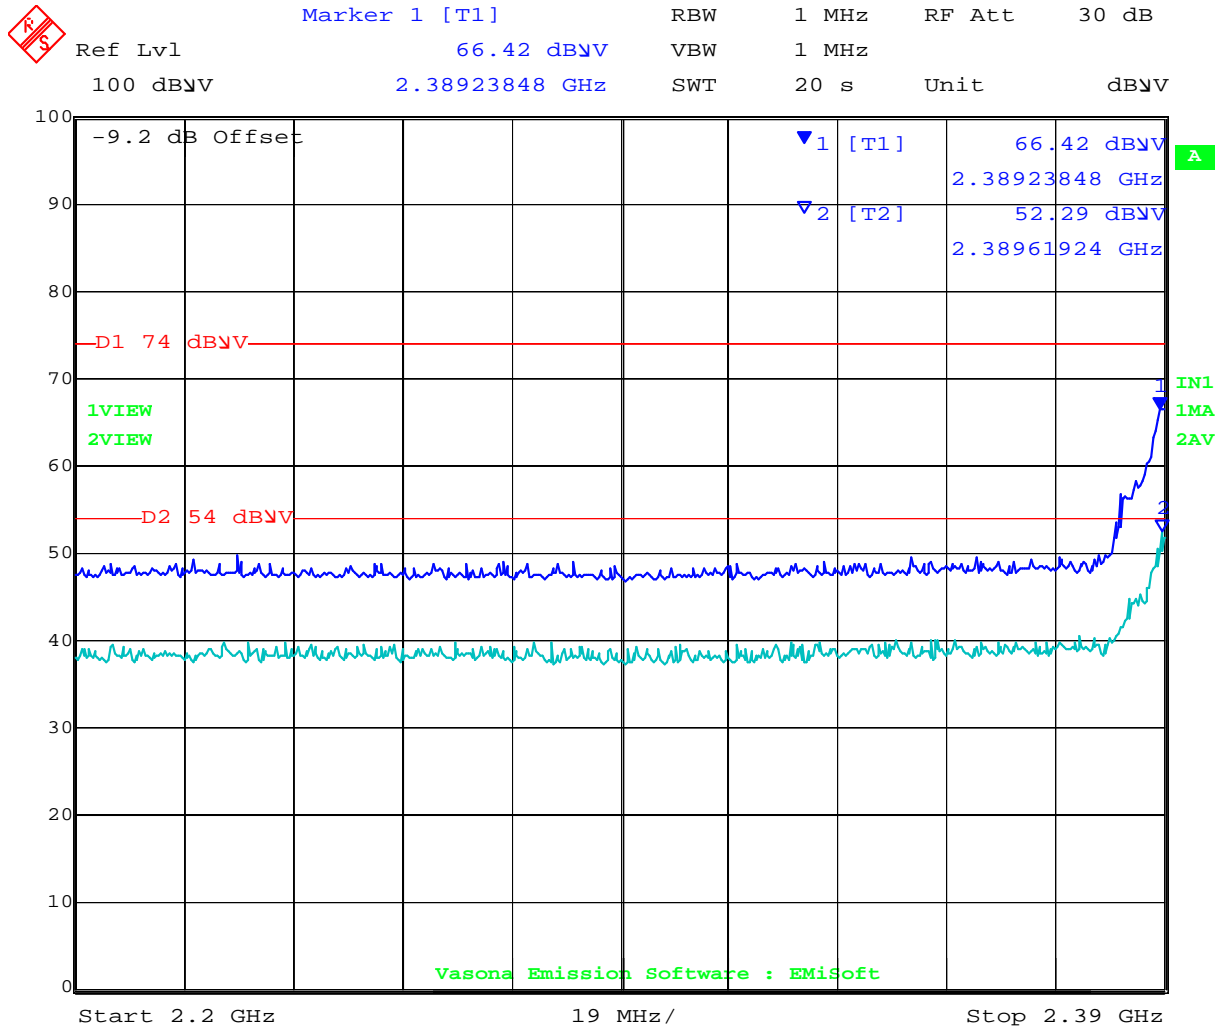


Date: 22.OCT.2012 18:57:04


Power reduction required in order to bring unit into compliance NART = 18



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 114 of 333

### 11n HT-40 2390 MHz Band Edge

 **Marker 1 [T1]** RBW 1 MHz RF Att 30 dB  
Ref Lvl 68.21 dBµV VBW 1 MHz  
100 dBµV 2.39000000 GHz SWT 20 s Unit dBµV

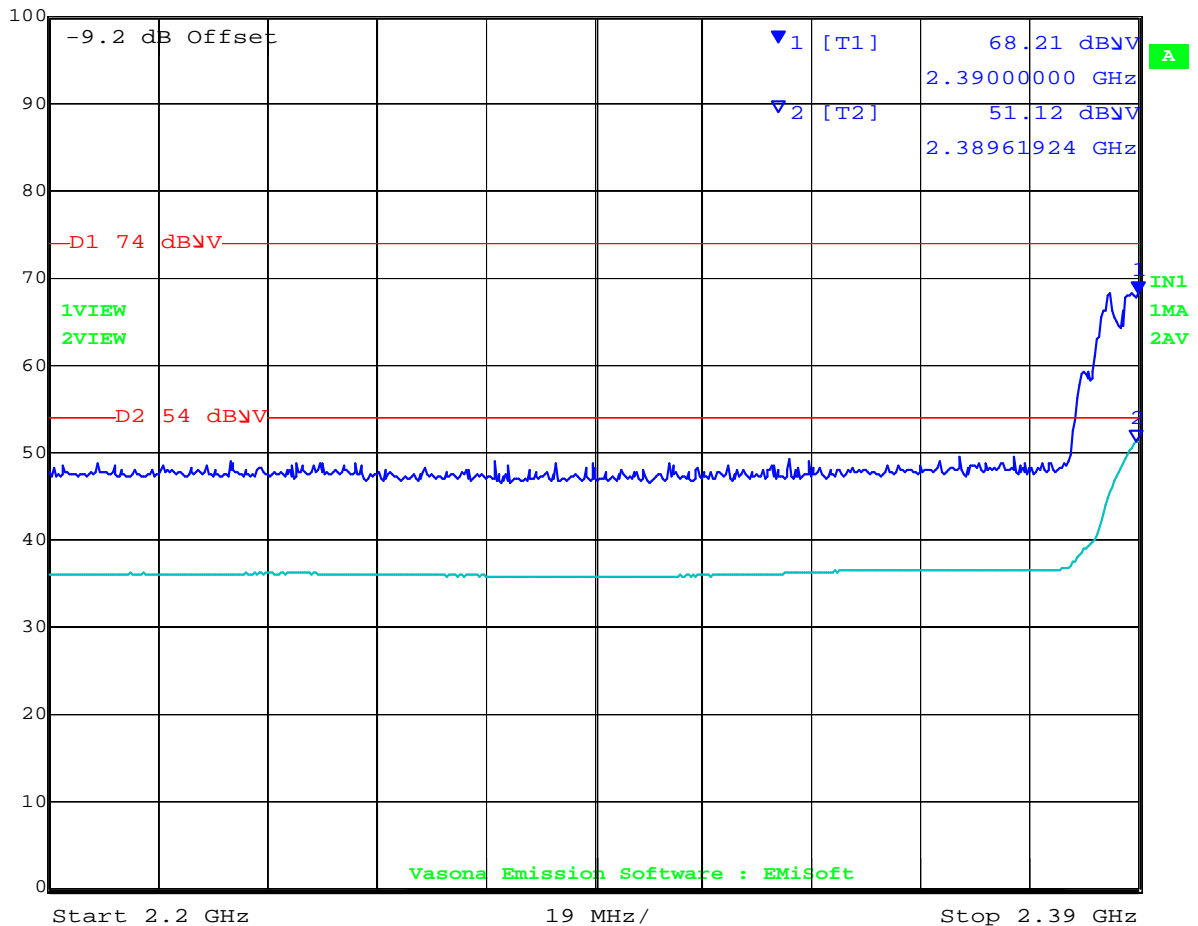

Date: 22.OCT.2012 19:07:07

Power reduction required in order to bring unit into compliance NART = 15


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 115 of 333

Mid

<b>Test Freq.</b>	2437 MHz	<b>Engineer</b>	jmh
<b>Variant</b>	802.11b; 1 Mbs	<b>Temp (°C)</b>	25
<b>Freq. Range</b>	1000 MHz - 18000 MHz	<b>Rel. Hum.(%)</b>	32
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	998
<b>Antenna</b>	Integral	<b>Duty Cycle (%)</b>	100
<b>Test Notes 1</b>			
<b>Test Notes 2</b>			

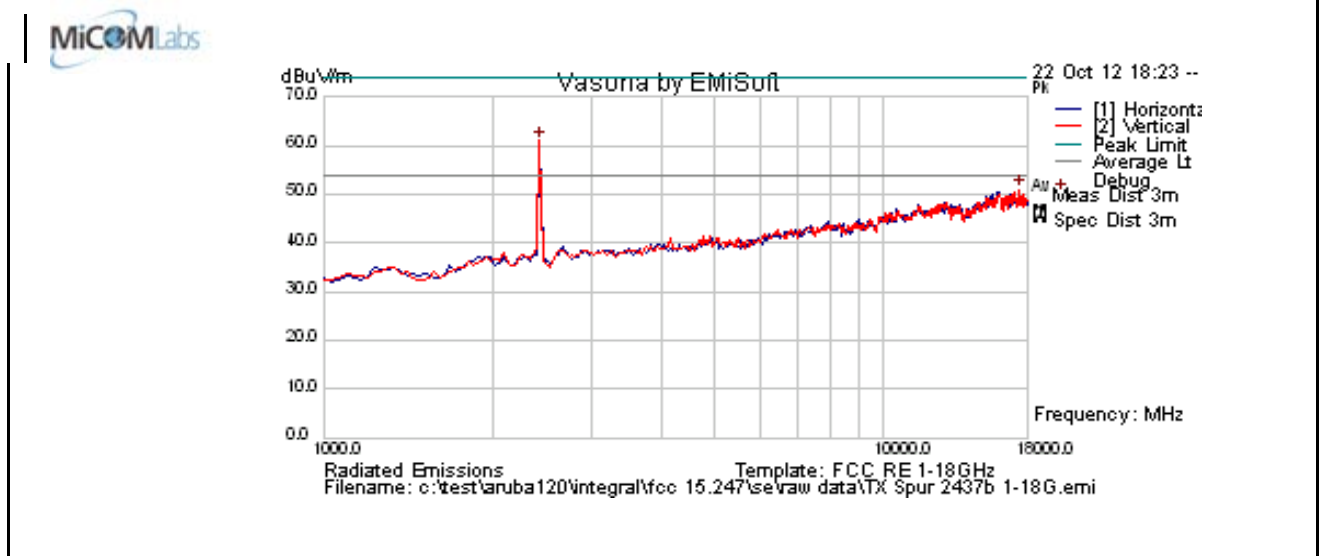

**Formally measured emission peaks**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	69.7	3.0	11.6	61.2	Peak [Scan]	V						FUND
17454.91	41.0	8.7	1.2	50.9	Peak [Scan]	V	100	0	54.0	-3.1	Pass	Noise

Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 116 of 333

High

Test Freq.	2462 MHz	Engineer	jmh
Variant	802.11b; 1 Mbs	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	18	Press. (mBars)	998
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

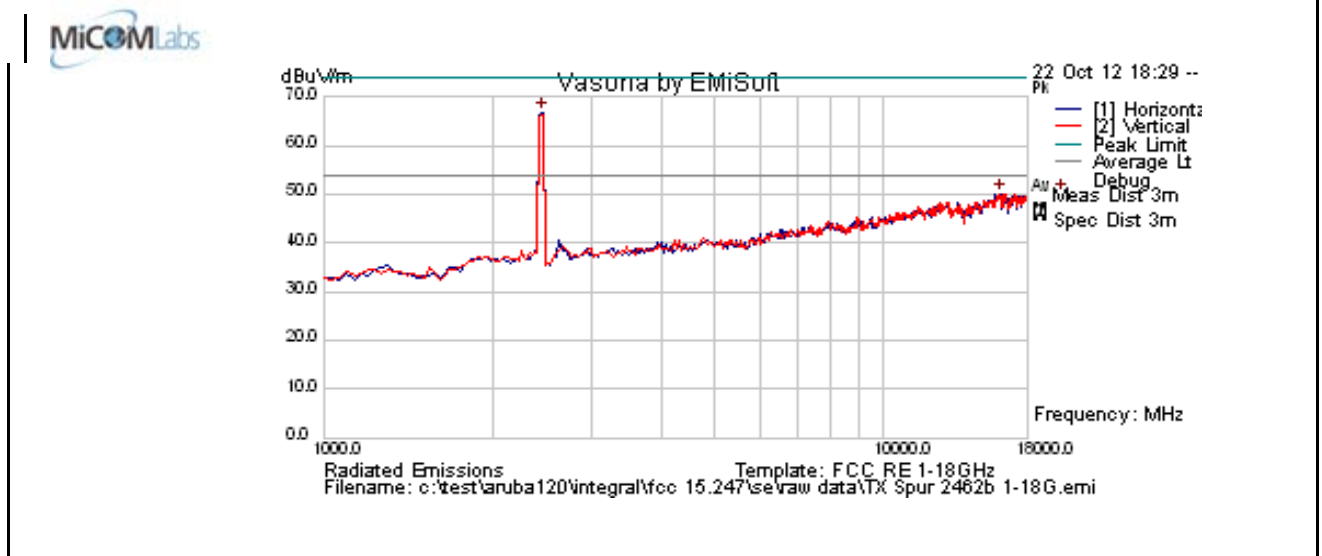

**Formally measured emission peaks**


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2464.930	75.4	3.0	11.5	66.9	Peak [Scan]	H						FUND
16092.184	40.9	9.0	0.3	50.2	Peak [Scan]	V	100	0	54.0	-3.8	Pass	Noise

Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
	RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



11b 2483.5 MHz Band Edge

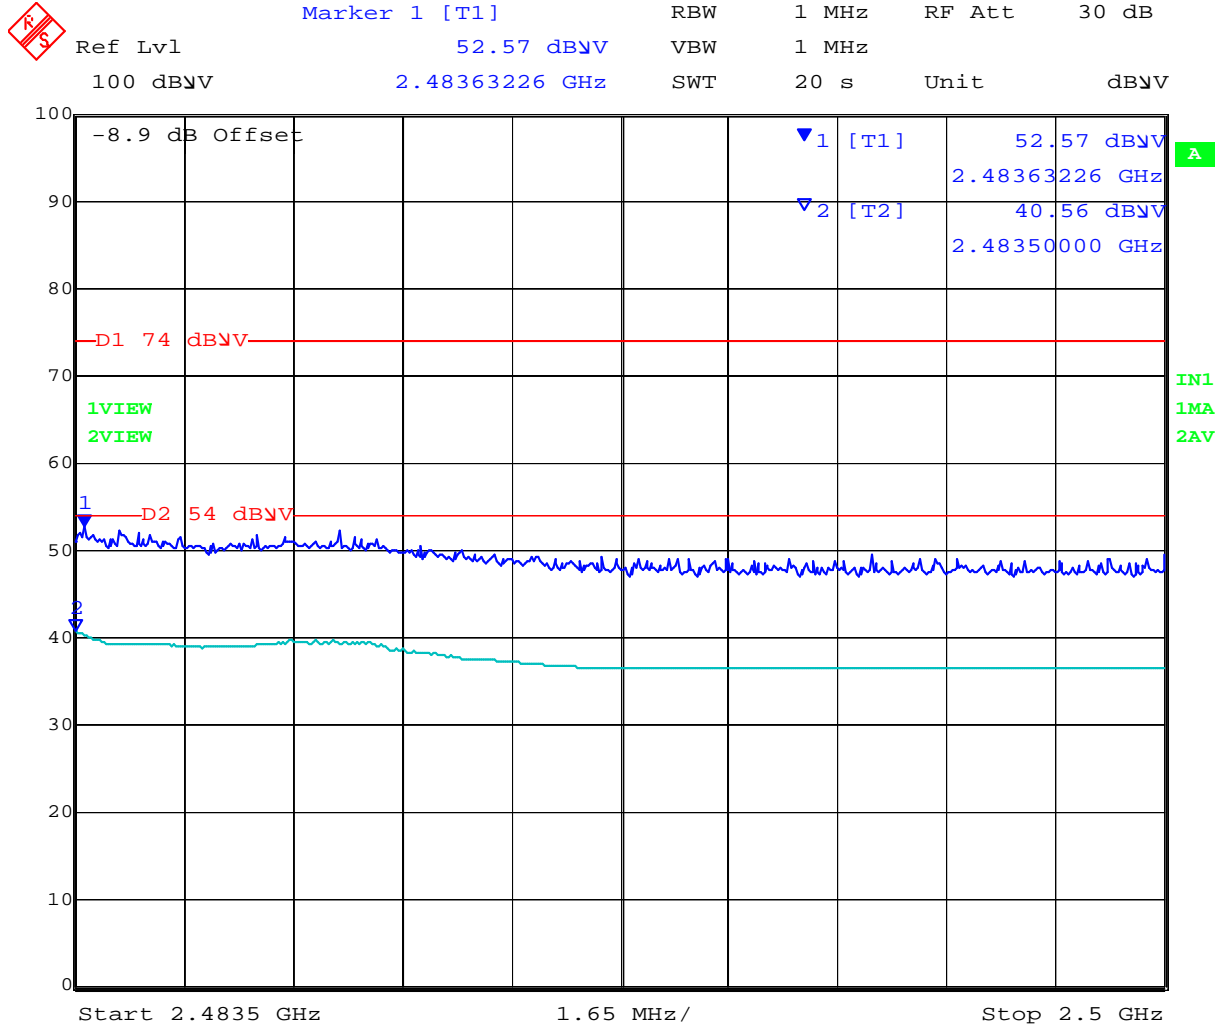


Date: 22.OCT.2012 19:44:56

Power reduction required in order to bring unit into compliance NART = 18



11g 2483.5 MHz Band Edge

	Ref Lvl	Marker 2 [T2]	RBW	1 MHz	RF Att	30 dB
	100 dBμV	49.54 dBμV	VBW	1 MHz		
		2.48350000 GHz	SWT	20 s	Unit	dBμV

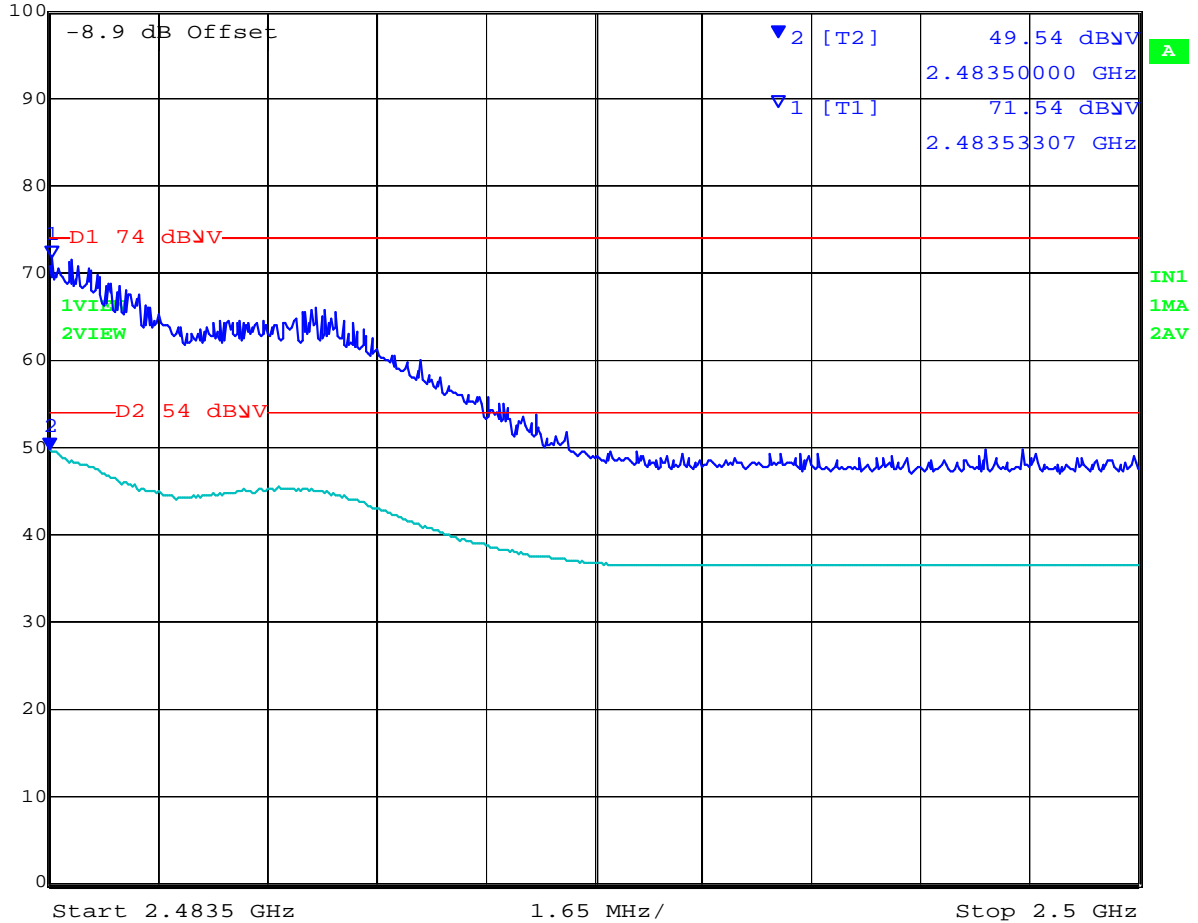


Date: 22.OCT.2012 19:39:28


Power reduction required in order to bring unit into compliance NART = 18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



### 11n HT-20 2483.5 MHz Band Edge

 **Marker 1 [T1]** RBW 1 MHz RF Att 30 dB  
Ref Lvl 72.79 dBμV VBW 1 MHz  
100 dBμV 2.48373146 GHz SWT 20 s Unit dBμV

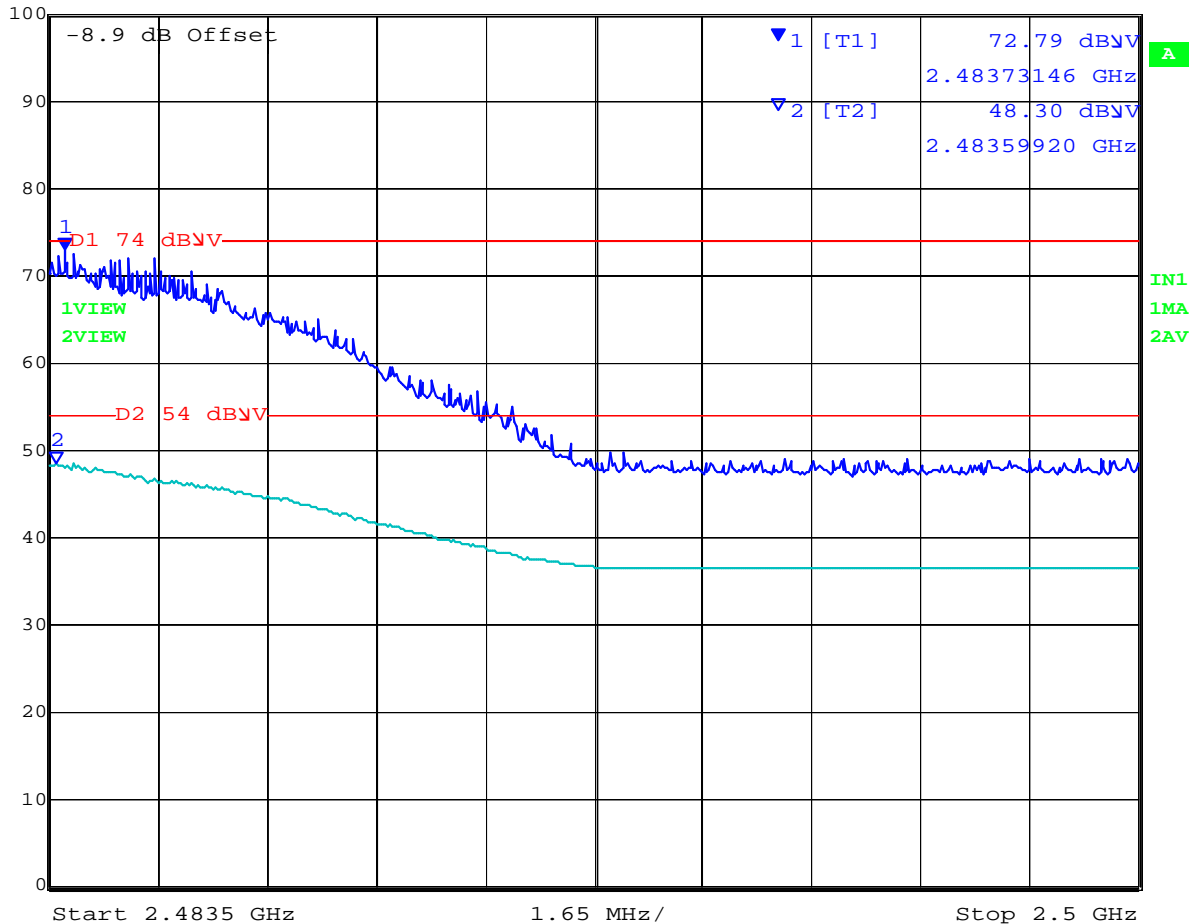


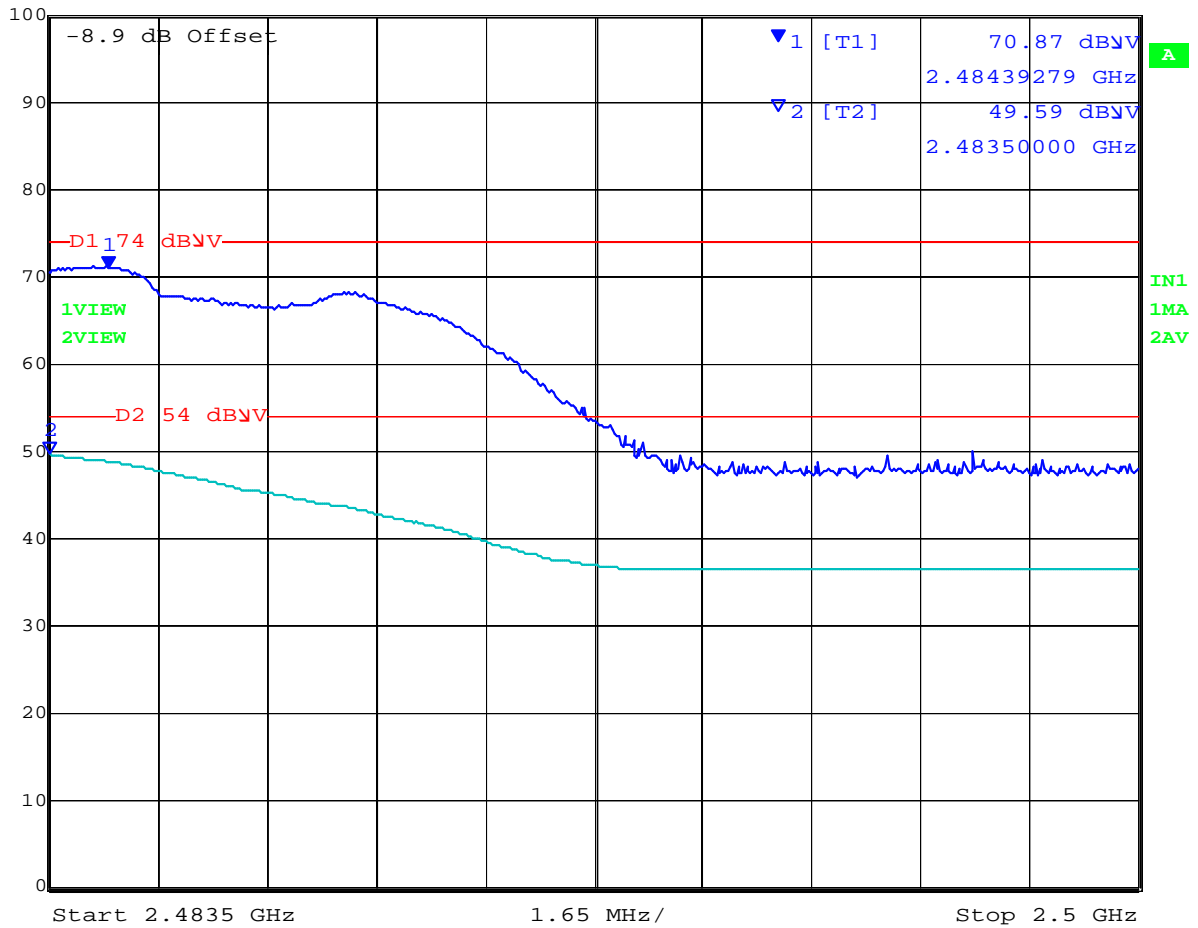
Date: 22.OCT.2012 19:34:34

Power reduction required in order to bring unit into compliance NART = 17.5



11n HT-40 2483.5 MHz Band Edge

 Marker 1 [T1] RBW 1 MHz RF Att 30 dB  
Ref Lvl 70.87 dBμV VBW 1 MHz  
100 dBμV 2.48439279 GHz SWT 20 s Unit dBμV



Date: 22.OCT.2012 19:27:59

Power reduction required in order to bring unit into compliance NART = 15.5






**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 121 of 333

5G low

Test Freq.	5745 MHz	Engineer	JMH
Variant	802.11a; 6.5 Mbs	Temp (°C)	22
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1001
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

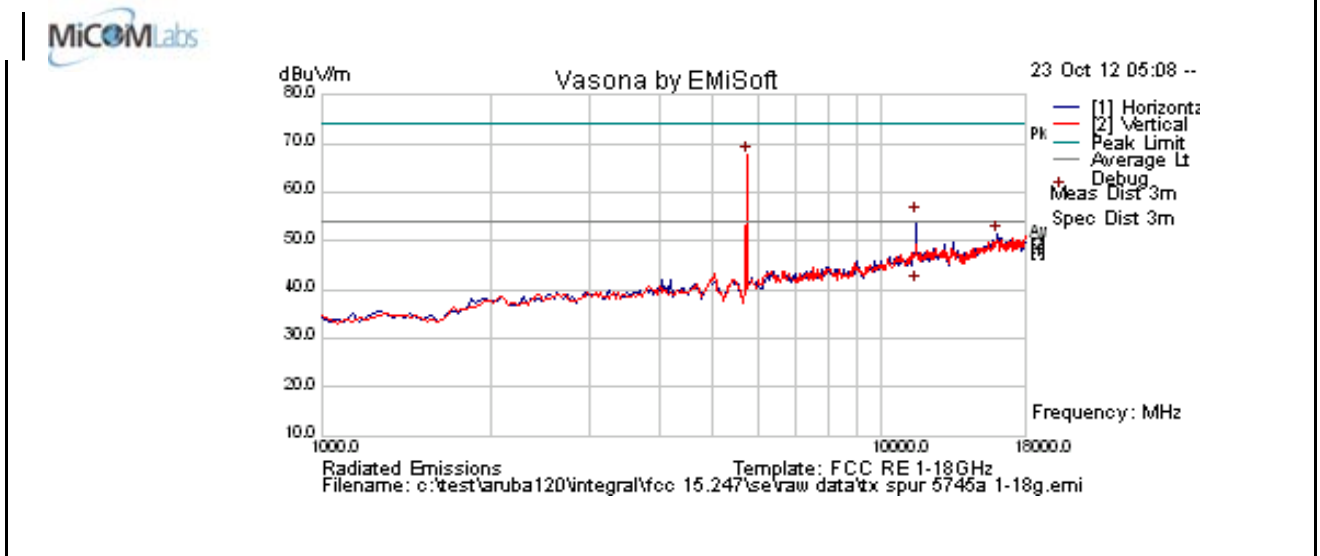


**Formally measured emission peaks**


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5735.471	72.4	4.8	-9.5	67.7	Peak [Scan]	V						FUND
16058.116	42.2	9.0	0.3	51.4	Peak [Scan]	H	150	0	54.0	-2.6	Pass	Noise
11493.657	50.3	6.8	-2.0	55.1	Peak Max	H	116	37	74	-18.9	Pass	RB
11493.657	36.3	6.8	-2.0	41.1	Average Max	H	116	37	54	-12.9	Pass	RB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



11a 5350 MHz Band Edge

 **Marker 1 [T1]** RBW 1 MHz RF Att 20 dB  
Ref Lvl 50.28 dBμV VBW 1 MHz  
100 dBμV 5.35925852 GHz SWT 20 s Unit dBμV

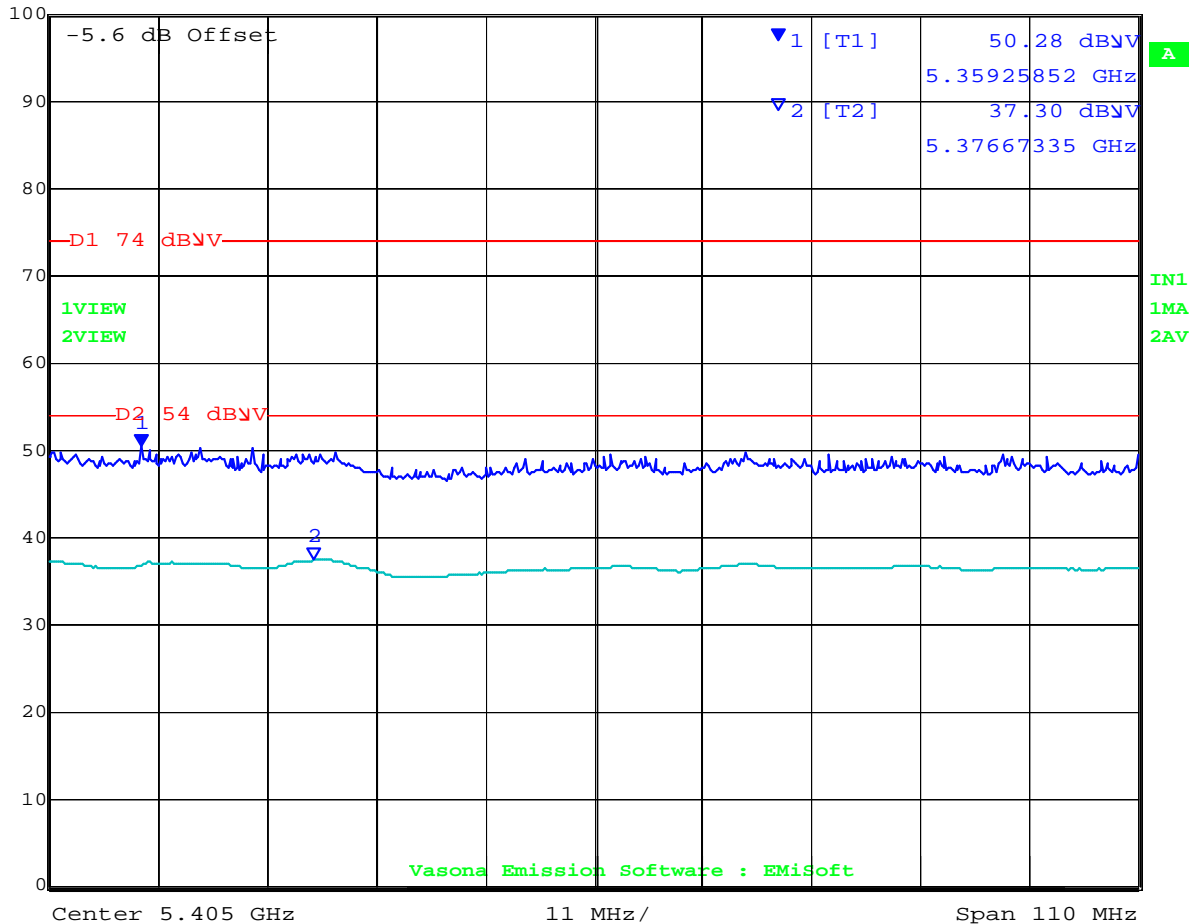


Date: 23.OCT.2012 07:12:38

Power reduction required in order to bring unit into compliance NART = 18



11n HT-20 5350 MHz Band Edge

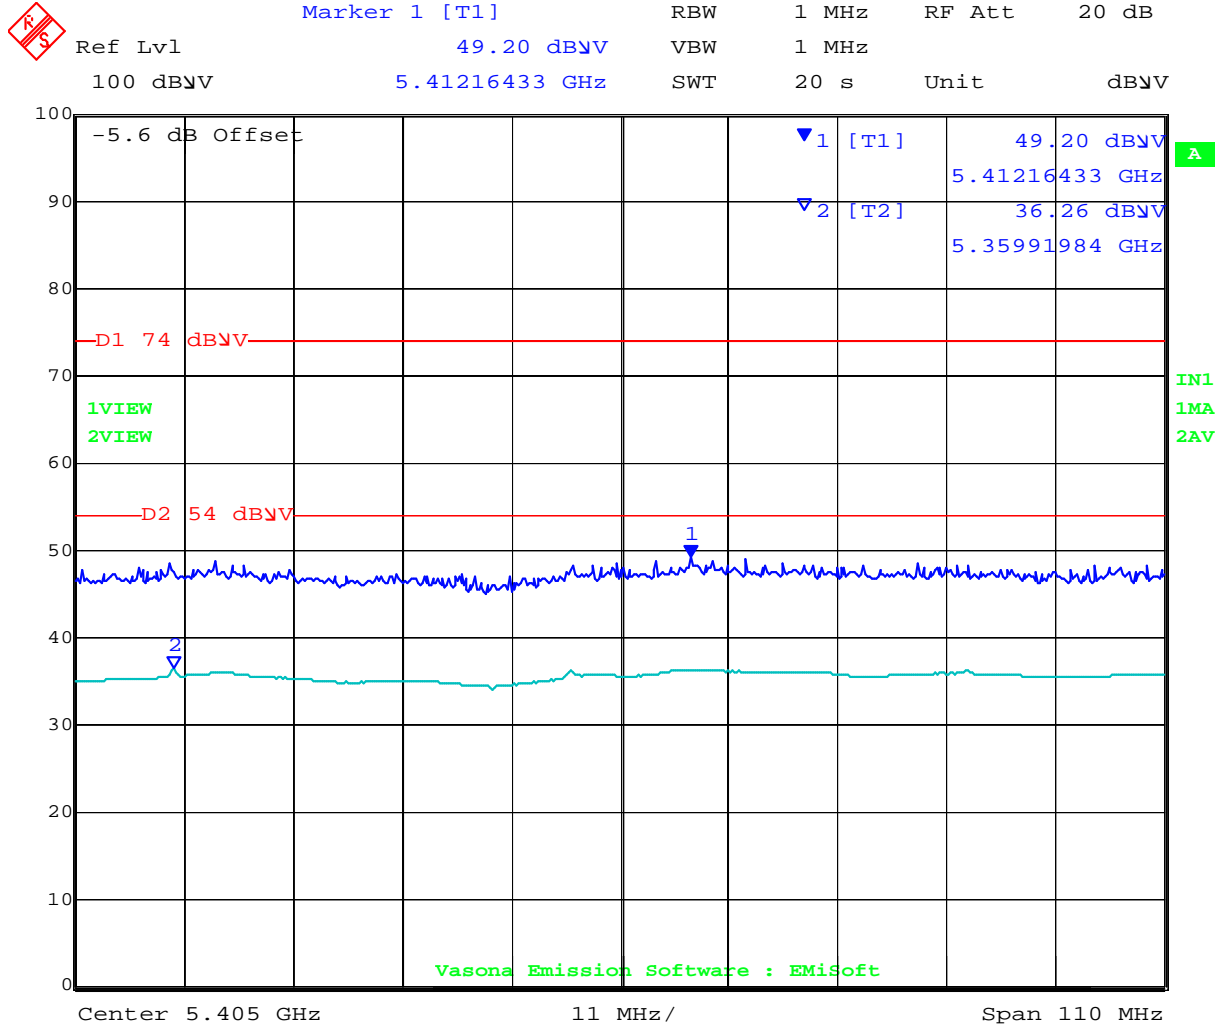


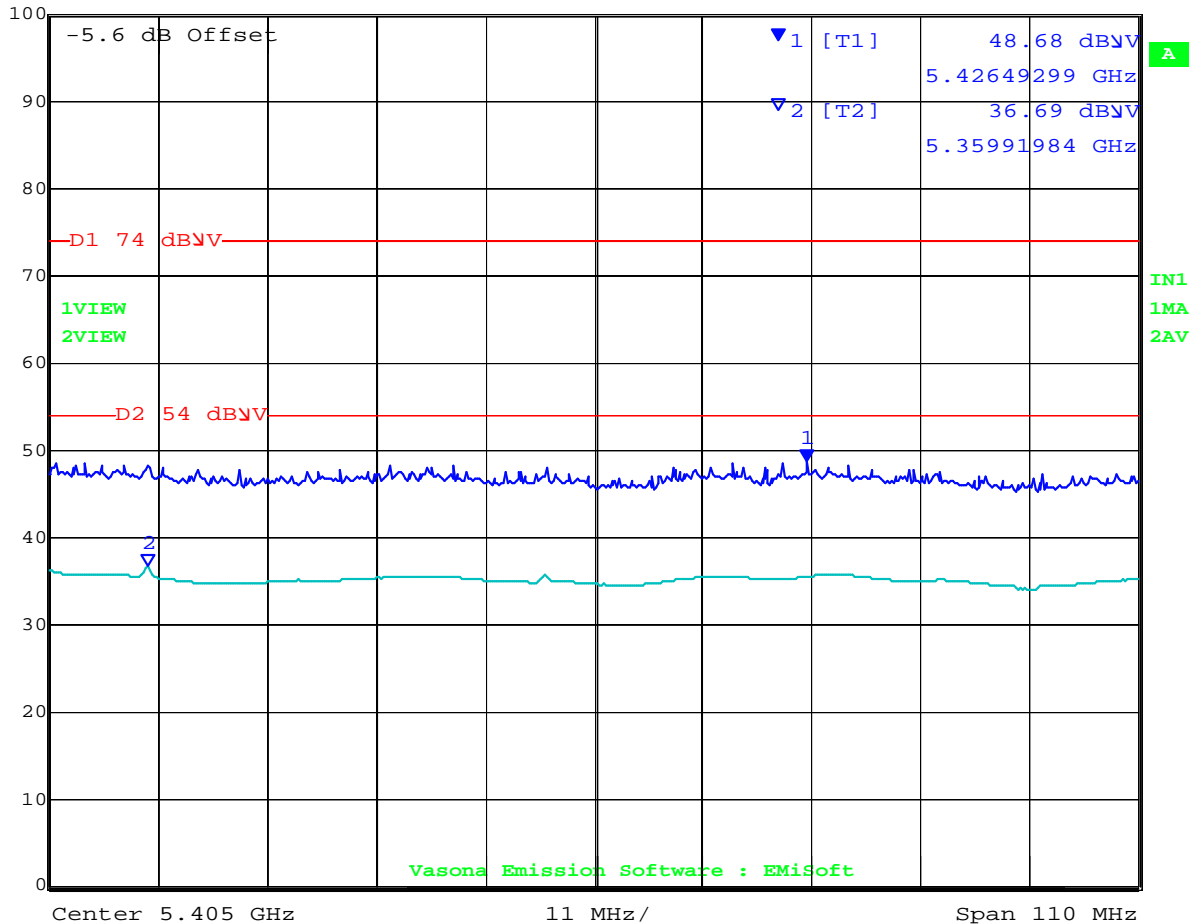
Date: 23.OCT.2012 07:10:32

Power reduction required in order to bring unit into compliance NART = 18



11n HT-40 5350 MHz Band Edge

 Marker 1 [T1] RBW 1 MHz RF Att 20 dB  
Ref Lvl 48.68 dBμV VBW 1 MHz  
100 dBμV 5.42649299 GHz SWT 20 s Unit dBμV



Date: 23.OCT.2012 07:08:35


Power reduction required in order to bring unit into compliance NART = 18



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 125 of 333

5G Mid

Test Freq.	5785 MHz	Engineer	JMH
Variant	802.11a; 6.5 Mbs	Temp (°C)	22
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1001
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

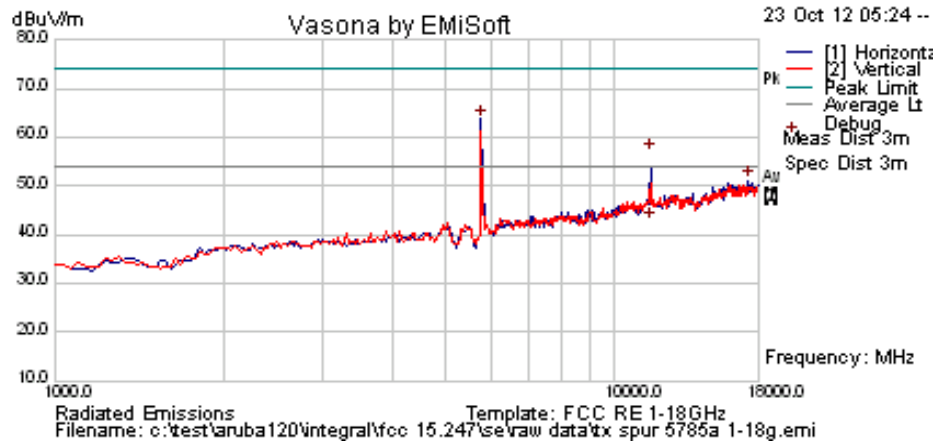

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5769.539	68.5	4.8	-9.5	63.8	Peak [Scan]	H						FUND
17284.569	41.4	8.6	1.1	51.1	Peak [Scan]	H	150	0	54.0	-2.9	Pass	Noise
11569.984	52.2	6.8	-2.0	57.0	Peak Max	H	103	27	74	-17.1	Pass	RB
11569.984	37.9	6.8	-2.0	42.7	Average Max	H	103	27	54	-11.3	Pass	RB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 126 of 333

5G High

Test Freq.	5825 MHz	Engineer	JMH
Variant	802.11a; 6.5 Mbs	Temp (°C)	22
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1001
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

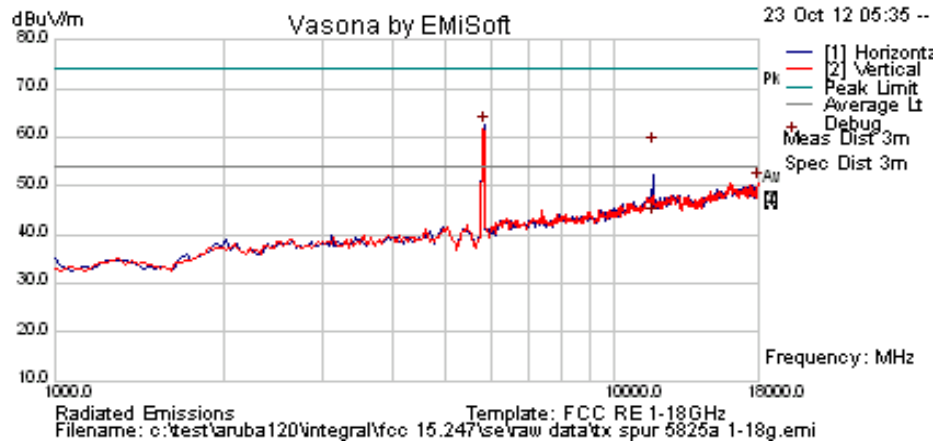

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5837.675	67.0	4.8	-9.3	62.6	Peak [Scan]	H						FUND
17965.932	41.3	8.8	0.7	50.8	Peak [Scan]	V	100	0	54.0	-3.2	Pass	Noise
11652.145	53.7	6.8	-2.3	58.2	Peak Max	H	118	171	74	-15.8	Pass	RB
11652.145	38.8	6.8	-2.3	43.4	Average Max	H	118	171	54	-10.7	Pass	RB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 127 of 333

---

## Specification Limits

**FCC §15.247(d) and RSS-210 §A8.5** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

### **FCC §15.247(d)**

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section §15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(a)).

**IC RSS-210 §A8.5** If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

### **IC RSS-Gen §4.7**

The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate or carrier frequency), or from 30 MHz, whichever is the lowest frequency, to the 5<sup>th</sup> harmonic of the highest frequency generated without exceeding 40 GHz.

**FCC §15.205 (a)** Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

**FCC §15.205 (a)** Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**FCC §15.209 (a)** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 128 of 333

**§15.209 (a) Limit Matrix**

Frequency(MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ )	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

**Laboratory Measurement Uncertainty for Radiated Emissions**

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

**Traceability**

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





#### 5.1.2.4. Digital Emissions (0.03-1 GHz)

**FCC, Part 15 Subpart C §15.205/ §15.209**  
**Industry Canada RSS-210 §2.2**

##### Test Procedure

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

The EUT had two methods of powering on ac/dc converter and Power over Ethernet (POE). Both modes were tested for emissions below 1GHz.

##### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength  
R = Measured Receiver Input Amplitude  
AF = Antenna Factor  
CORR = Correction Factor = CL – AG + NFL  
CL = Cable Loss  
AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB $\mu$ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V}/\text{m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:


$$\text{Level (dB}\mu\text{V}/\text{m)} = 20 * \text{Log (level (\mu\text{V}/\text{m}))}$$

$$40 \text{ dB}\mu\text{V}/\text{m} = 100\mu\text{V}/\text{m}$$
$$48 \text{ dB}\mu\text{V}/\text{m} = 250\mu\text{V}/\text{m}$$



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 130 of 333

<b>Test Freq.</b>	5320 MHz	<b>Engineer</b>	JMH
<b>Variant</b>	Digital Emissions	<b>Temp (°C)</b>	26
<b>Freq. Range</b>	30 MHz - 1000 MHz	<b>Rel. Hum.(%)</b>	33
<b>Power Setting</b>	18	<b>Press. (mBars)</b>	1000
<b>Antenna</b>	6 dBi Monopole		
<b>Test Notes 1</b>	unshielded ethernet and no console cable		
<b>Test Notes 2</b>			

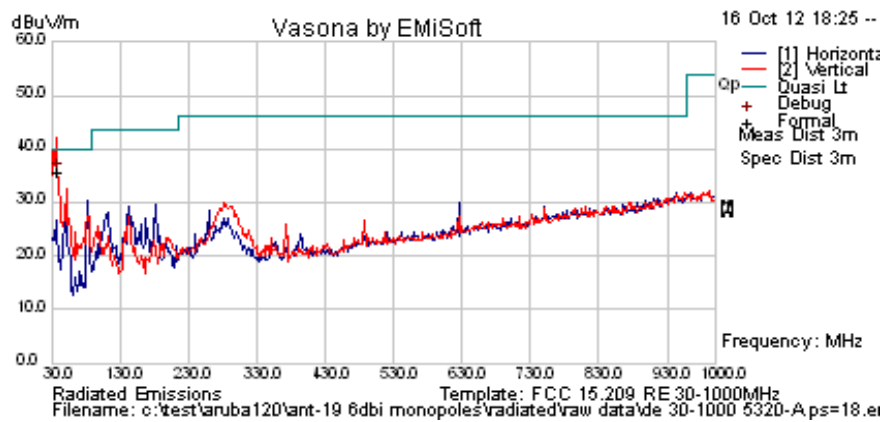

### Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
38.565	48.6	3.6	-16.4	35.8	Quasi Peak	V	114	136	40	-4.2	Pass	
Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 131 of 333

## Specification

### Limits

**§15.205 (a)** Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

**§15.205 (a)** Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**§15.209 (a)** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

### §15.209 (a) and RSS-Gen §2.2 Limit Matrix

Frequency(MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ )	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

### Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


### 5.1.3. AC Wireline Conducted Emissions (150 kHz – 30 MHz)

**FCC, Part 15 Subpart C §15.207**  
**Industry Canada RSS-Gen §7.2.2**

#### **Test Procedure**

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

#### **Test Measurement Set up**

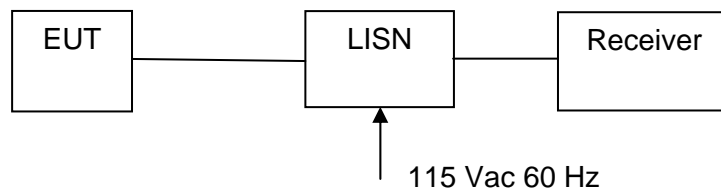

Measurement set up for AC Wireline Conducted Emissions Test

#### **Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)**

Ambient conditions.

Temperature: 17 to 23 °C    Relative humidity: 31 to 57 %    Pressure: 999 to 1012 mbar

**Not required - EUT is power by POE only.**



## Specification

### Limit

**§15.207 (a)** Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu\Omega$  line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

### RSS-Gen §7.2.2

The radio frequency voltage that is conducted back into the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The tighter limit applies at the frequency range boundaries.

### §15.207 (a) and RSS-Gen §7.2.2 Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency

### Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	$\pm 2.64$ dB
-------------------------	---------------

### Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'	0158, 0184, 0287, 0190, 0293, 0307

## 6. PHOTOGRAPHS

### 6.1. Test Setup - Digital Emissions below 1 GHz



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## 6.2. Radiated Emissions Test Setup >1 GHz – ANT-19



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Aruba Networks APINR108, APINR109 Wireless AP  
**To:** FCC 47 CFR Part 15.247 & IC RSS-210  
**Serial #:** ARUB120-U1 Rev A  
**Issue Date:** 28th November 2012  
**Page:** 136 of 333

## 7. TEST EQUIPMENT

Asset #	Instrument	Manufacturer	Part #	Serial #	Calibration Due Date
0070	Power Meter	Hewlett Packard	437B	3125U11552	28 <sup>th</sup> Nov 12
0117	Power Sensor	Hewlett Packard	8487D	3318A00371	15 <sup>th</sup> Nov 12
0223	Power Meter	Hewlett Packard	EPM-442A	US37480256	15 <sup>th</sup> Nov 12
0374	Power Sensor	Hewlett Packard	8485A	3318A19694	29 <sup>th</sup> Nov 12
0158	Barometer /Thermometer	Control Co.	4196	E2846	8 <sup>th</sup> Dec 12
0193	EMI Receiver	Rhode & Schwartz	ESI 7	838496/007	2 <sup>nd</sup> Dec 12
0287	EMI Receiver	Rhode & Schwartz	ESIB40	100201	16 <sup>th</sup> Nov 12
0338	30 - 3000 MHz Antenna	Sunol	JB3	A052907	8 <sup>th</sup> Nov 13
0335	1-18 GHz Horn Antenna	EMCO	3117	00066580	7 <sup>th</sup> Nov 13
0252	SMA Cable	Megaphase	Sucoflex 104	None	N/A
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001	N/A
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002	N/A
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001	N/A
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	209092-001	N/A
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623	N/A
	EMC Test Software	EMISoft	Vasona	5.0051	N/A
	RF Conducted Test Software	National Instruments	Labview	Version 8.2	N/A
	RF Conducted Test Software	MiCOM Labs ATS		Version 1.5	N/A

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.