

Test of Aruba APINR108, 109 Wireless Remote
Access Point

To: FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: ARUB121-U1 Rev A



TEST REPORT

FROM



Test of Aruba APINR108, 109 Wireless Remote Access Point
to

To FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: ARUB121-U1 Rev A

Note: this report contains data with regard to the 5,250 to 5,350 MHz and 5470 to 5725 MHz bands for Aruba Networks, APINR108, APINR109 Wireless Access Point. 2.4 and 5.8 GHz test data are reported in MiCOM Labs test report ARUB120-U1, and 5,150 – 5250 MHz test data is reported in test report ARUB120-U2.

This report supersedes None

Applicant: Aruba Networks, Inc
1344 Crossman Avenue
Sunnyvale
California 94089, USA

Product Function: Wireless Access Point

Copy No: pdf Issue Date: 12th July 2013

This Test Report is Issued Under the Authority of;

MiCOM Labs, Inc.

440 Boulder Court, Suite 200

Pleasanton, CA 94566 USA

Phone: +1 (925) 462-0304

Fax: +1 (925) 462-0306

www.micomlabs.com



TEST CERTIFICATE #2381.01

MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 3 of 179

This page has been left intentionally blank

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF CONTENTS

ACCREDITATION, LISTINGS & RECOGNITION	5
TESTING ACCREDITATION	5
RECOGNITION	6
PRODUCT CERTIFICATION	7
1. TEST RESULT CERTIFICATE	9
2. REFERENCES AND MEASUREMENT UNCERTAINTY	10
2.1. Normative References.....	10
2.2. Test and Uncertainty Procedures.....	11
3. PRODUCT DETAILS AND TEST CONFIGURATIONS	12
3.1. Technical Details.....	12
3.2. Scope of Test Program	13
3.3. Equipment Model(s) and Serial Number(s).....	17
3.4. Antenna Details.....	17
3.5. Cabling and I/O Ports.....	18
3.6. Test Configurations	18
3.7. Equipment Modifications	20
3.8. Deviations from the Test Standard.....	20
3.9. Subcontracted Testing or Third Party Data.....	20
4. TESTING EQUIPMENT CONFIGURATION(S)	21
4.1. Conducted RF Emission Test Set-up.....	21
4.2. Radiated Spurious Emission Test Set-up > 1 GHz	22
4.3. Digital Emissions Test Set-up (0.03 – 1 GHz).....	23
4.4. ac Wireline Emission Test Set-up	24
5. TEST SUMMARY	25
6. TEST RESULTS	27
6.1. Device Characteristics.....	27
6.1.1. <i>Conducted Testing</i>	27
6.1.2. <i>Radiated Emission Testing</i>	56
6.1.3. <i>AC Wireline Conducted Emissions (150 kHz – 30 MHz)</i>	99
7. PHOTOGRAPHS	101
7.1. Test Setup - Digital Emissions below 1 GHz.....	101
7.2. Radiated Emissions Test Setup >1 GHz – ANT-19	102
8. TEST EQUIPMENT DETAILS	103
APPENDIX	104
A. SUPPORTING INFORMATION	104
A.1. CONDUCTED TEST PLOTS	104
A.1.1. <i>26 dB & 99% Bandwidth</i>	105
A.1.2. <i>Peak Power Spectral Density</i>	139
A.1.3. <i>Peak Excursion Ratio</i>	173

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 5 of 179

ACCREDITATION, LISTINGS & RECOGNITION

TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



RECOGNITION

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA** countries. Our test reports are widely accepted for global type approvals.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

**APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

**EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

**NB – Notified Body

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 7 of 179

PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard EN ISO/IEC Guide 65. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



The American Association for Laboratory Accreditation

Accredited Product Certification Body

A2LA has accredited

MICOM LABS

Pleasanton, CA

for technical competence as a

Product Certification Body

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC Guide 65:1996 *General requirements for bodies operating product certification systems*. This accreditation demonstrates technical competence for a defined scope and the operation of a quality management system.

Presented this 27th day of March 2012.



Peter Abney

President & CEO
For the Accreditation Council
Certificate Number 2381.02
Valid to November 30, 2013

For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation

USA Telecommunication Certification Body (TCB) - TCB Identifier – US0159

Industry Canada Certification Body - CAB Identifier – US0159

European Notified Body - Notified Body Identifier - 2280

Japan – Recognized Certification Body (RCB) - RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 8 of 179

DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	12 th July 2013	Initial release

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 9 of 179

1. TEST RESULT CERTIFICATE

Applicant:	Aruba Networks, Inc 1344 Crossman Avenue Sunnyvale California 94089, USA	Tested By:	MiCOM Labs, Inc. 440 Boulder Court Suite 200 Pleasanton California, 94566, USA
EUT:	Wireless Remote Access Point	Tel:	+1 925 462 0304
Model:	APINR108, APINR109	Fax:	+1 925 462 0306
S/N:	BV0001022 (Conducted) BV0000142 (Radiated)		
Test Date(s):	1st to 31st October'12 and 26th to 28th June 2013	Website:	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 15.407 & IC RSS-210	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:


1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:





Graeme Grieve
Quality Manager MiCOM Labs,

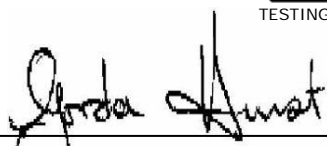

Gordon Hurst
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 10 of 179

2. REFERENCES AND MEASUREMENT UNCERTAINTY

2.1. Normative References

Ref.	Publication	Year	Title
(i)	FCC 47 CFR Part 15.407	2012	Code of Federal Regulations
(ii)	FCC 06-96	June 2006	Memorandum Opinion and Order
(iii)	FCC OET KDB 662911	4 th April 2011	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
(iv)	Industry Canada RSS-210	2010	Low Power License-Exempt Radiocommunication Devices (All Frequency Bands): Category 1 Equipment
(v)	Industry Canada RSS-Gen	2010	General Requirements and Information for the Certification of Radiocommunication Equipment
(vi)	ANSI C63.4	2009	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
(vii)	CISPR 22/ EN 55022	2008 2006+A1:2007	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
(viii)	M 3003	Edition 2 Jan. 2007	Expression of Uncertainty and Confidence in Measurements
(ix)	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
(x)	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
(xi)	A2LA	July 2012	Reference to A2LA Accreditation Status – A2LA Advertising Policy
(xii)	FCC Public Notice – DA 02-2138	2002	Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 11 of 179

2.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 13 of 179

3.2. Scope of Test Program

Aruba Networks APINR108, APINR109 Access Point RF Testing

The scope of the test program was to test the Aruba Networks APINR108, APINR109 Wireless Remote Access Point, 2X2 Spatial Multiplexing MIMO configurations in the frequency range 5,250 to 5,350 MHz and 5470 – 5725 MHz for compliance against FCC 47 CFR Part 15.407 and Industry Canada RSS-210 specifications.

FCC OET KDB Implementation

This test program implements the following FCC KDB – 662911 4/4/2011;

Emissions Testing of Transmitters with Multiple Outputs in the Same Band

The KDB document provides guidance for measurements of conducted output emissions of devices that employ a single transmitter with multiple outputs in the same band, with the outputs occupying the same or overlapping frequency ranges. It applies to EMC compliance measurements on devices that transmit on multiple antennas simultaneously in the same or overlapping frequency ranges through a coordinated process. Examples include, but are not limited to, devices employing beam forming or multiple-input and multiple-output (MIMO.) This guidance applies to both licensed and unlicensed devices wherever the FCC rules call for conducted output measurements. Guidance is provided for in-band, out-of-band and spurious emission measurements.

This guidance does not apply to the multiple transmitters included in a composite device, such as a device that combines an 802.11 modem with a cell phone in one enclosure with each driving its own antenna.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

APINR108 Wireless Remote Access Point



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

APINR109 Wireless Remote Access Point



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

APINR108, APINR109 Wireless Remote Access Point (Rear)



APINR108, APINR109 Wireless Remote Access Point Label

Device has an electronic label



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 17 of 179

3.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	Wireless Remote Access Point	Aruba Networks	APINR108, APINR109	BV0001022 (Conducted) BV0000142 (Radiated)
Support	Laptop PC	IBM	Thinkpad	None

3.4. Antenna Details

Model	Type	Gain (dBi)	Freq. Band (MHz)	Note
Integral (APINR109)	PIFA	5.0	2400 - 2500	(3x per unit)
		5.0	4900 - 5875	
AP-ANT-1B	Omni	3.8	2400 - 2500	(3x per unit)
		5.8	4900 - 5875	
AP-ANT-13B	Omni	4.4	2400 - 2500	(3x per unit)
		3.3	4900 - 5900	
AP-ANT-16	Omni	3.9	2400 - 2500	(1x per unit) 3x3 MIMO
		4.7	4900 - 5900	
AP-ANT-17	Directional 120degr.	6.0	2400 - 2500	(1x per unit) 3x3 MIMO
		5.0	4900 - 5875	
AP-ANT-18	Directional 60degr.	7.0	2400 - 2500	(1x per unit) 3x3 MIMO
		7.5	5150 - 5875	
AP-ANT-19	Omni	3.0	2400 - 2500	(3 x per unit)
		6.0	5150 - 5875	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 18 of 179

3.5. Cabling and I/O Ports

Number and type of I/O ports

Port Type	Port Description	Qty	Screened (Yes/ No)	Length
Ethernet	Ethernet PoE	1	NO	> 10m
Ethernet	Ethernet	1	NO	3m-10m
Serial RS 323 (RJ45)	Serial Console	1	NO	1m-3m
USB	USB port	1	NO	1m-3m

3.6. Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Matrix of test configurations

Operational Band(s) (MHz)	Variant Mode	Data Rates with Highest Power	Frequencies (MHz)
5250-5350 5470-5725	802.11a	6 MBit/s	5260,5280,5300,5320
	802.11n HT-20	6.5 MCS	5500,5580,5700
	802.11n HT-40	13.5 MCS	5270,5310 5510,5550,5690

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Test Configurations (Continued)

Antenna Test Configurations for Radiated Emissions and Band-Edge

Results for the following configurations are provided in this report.

Radiated emissions testing was performed for three different antennas that represent the highest gain for each antenna type intended for use with the EUT;- Integral antenna (As used in APINR109) ; ANT-18 60 degree sector antenna; ANT-19 monopole antenna.

Testing was performed in worst case mode for emissions (11a. mode with the highest spectral density). Radiated Band-Edge testing was performed in all modes for each antenna.

**Spurious Emission and Band-Edge Test Strategy
Band 5,250 – 5,350**

11a	11n HT-20	11n HT-40
SE 5260	SE 5260	SE 5270
SE 5300	SE 5300	
SE 5320	SE 5320	SE 5310
BE 5350	BE 5350	BE 5350
Pk 5260	Pk 5260	Pk 5270
Pk 5300	Pk 5300	
Pk 5320	Pk 5320	Pk 5310

KEY:-
SE – Spurious Emissions
BE – Band-Edge
PK - Peak Emission

Band 5,470 – 5,725

11a	11n HT-20	11n HT-40
SE 5500	SE 5500	SE 5510
SE 5580	SE 5580	SE 5550
SE 5700	SE 5700	SE 5670
BE 5460	BE 5460	BE 5460
Pk 5500	Pk 5500	PK 5510
Pk 5580	Pk 5580	PK 5550
Pk 5700	Pk 5700	PK 5670

KEY:-
SE – Spurious Emissions
BE – Band-Edge
PK - Peak Emission



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 20 of 179

3.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

3.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

3.9. Subcontracted Testing or Third Party Data

1. NONE

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

4. TESTING EQUIPMENT CONFIGURATION(S)


4.1. Conducted RF Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.1.1. 26 dB and 99% Bandwidth
2. Section 6.1.1.2. Maximum Conducted Output Power
3. Section 6.1.1.3. Peak Power Spectral Density
4. Section 6.1.1.4. Peak Excursion Ratio

Conducted Test Set-Up Pictorial Representation

3 - Port Test Configuration

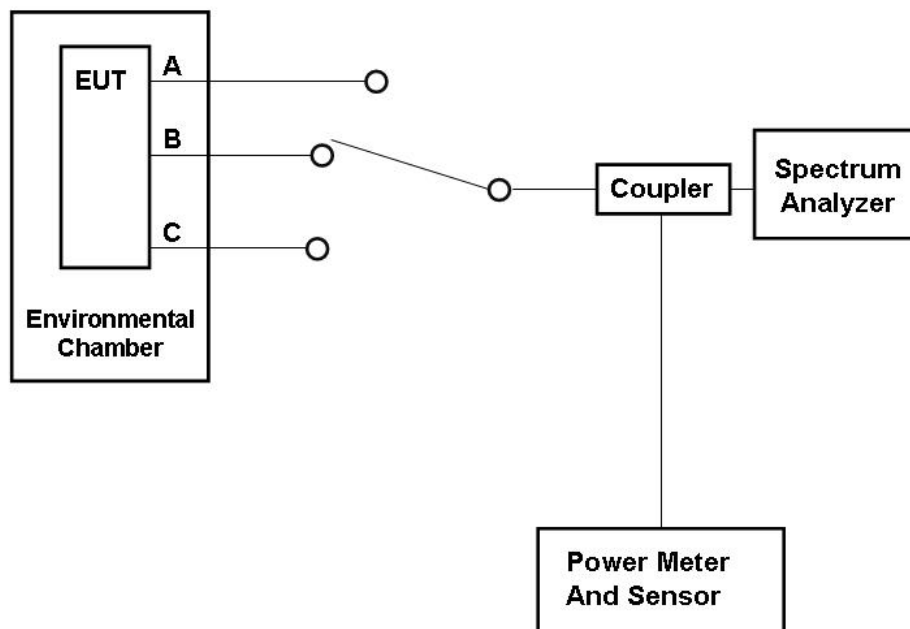


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

4.2. Radiated Spurious Emission Test Set-up > 1 GHz

The following tests were performed using the conducted test set-up shown in the diagram below.

Radiated Emission Measurement Setup – Above 1 GHz

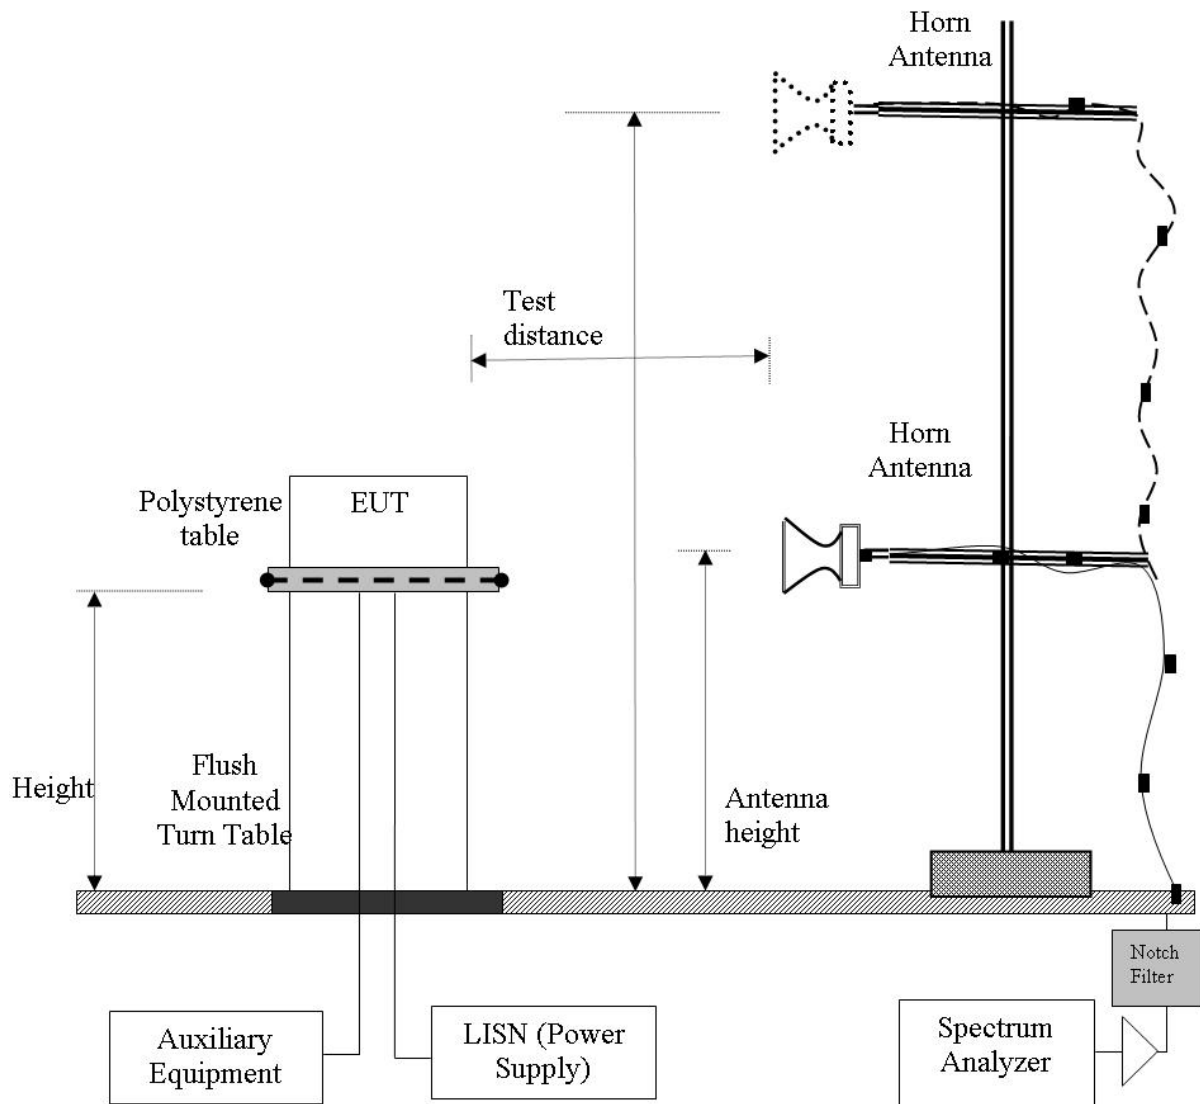


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

4.3. Digital Emissions Test Set-up (0.03 – 1 GHz)

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.2.4. Digital Emissions

Digital Emission Measurement Setup – Below 1 GHz

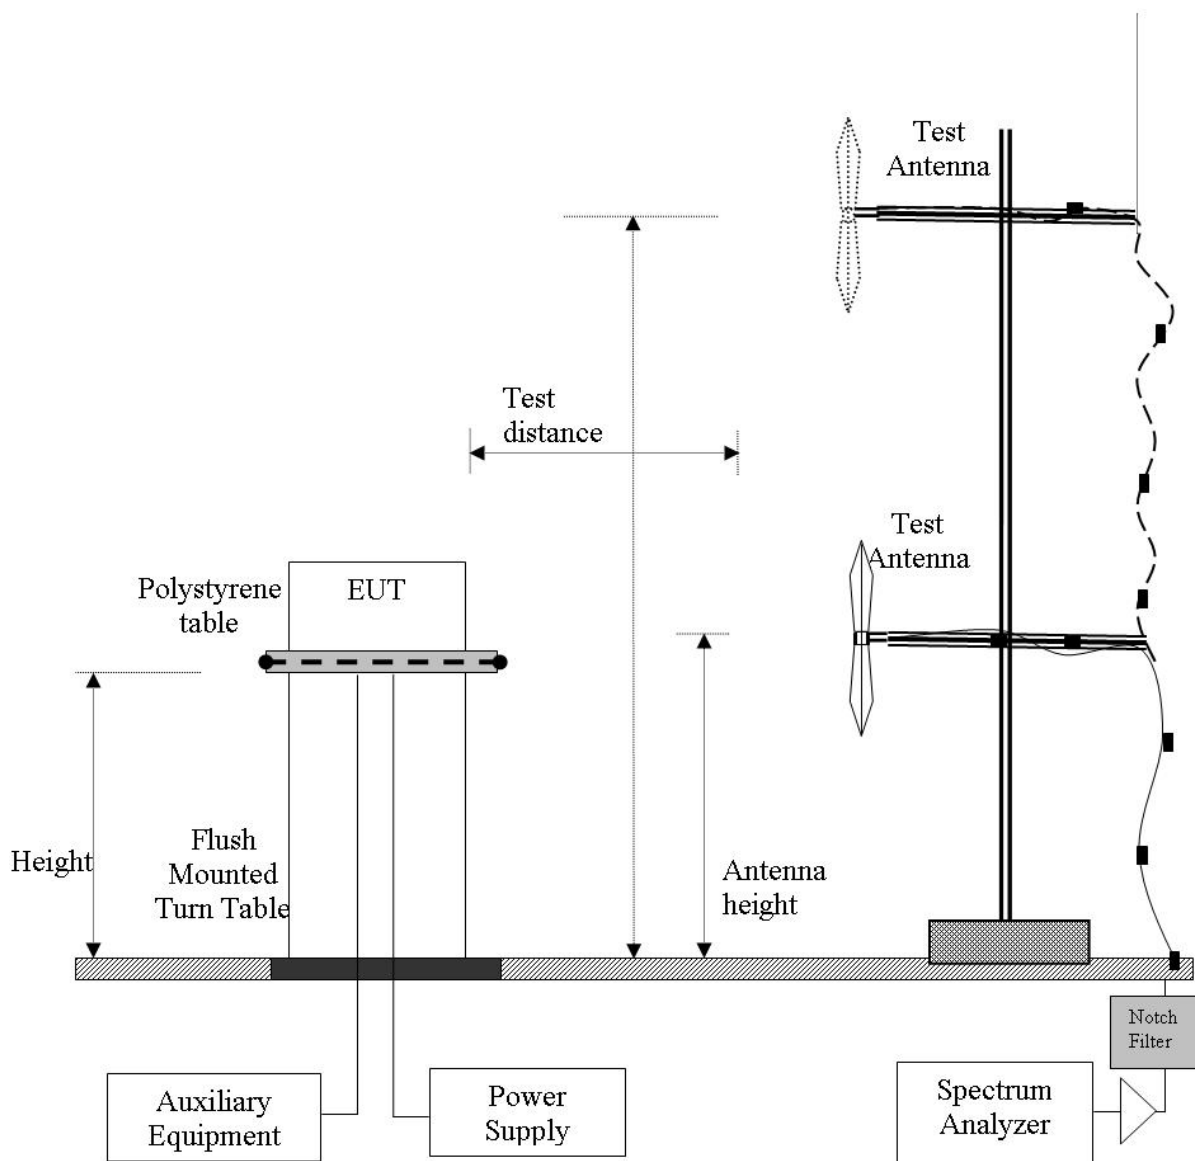


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

4.4. ac Wireline Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.3 ac Wireline Conducted Emissions

Conducted Test Set-Up Pictorial Representation

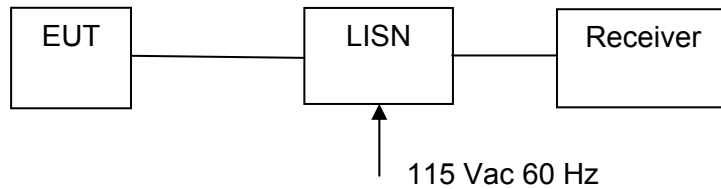

Measurement set up for ac Wireline Conducted Emissions Test



5. TEST SUMMARY

List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.407(a) A9.2(2) 4.4	26dB and 99% Emission BW	Emission bandwidth measurement	Conducted	Complies	6.1.1.1 A.1.1
15.407(a) A9.2(2) 4.6	Maximum Conducted Output Power	Power Measurement	Conducted	Complies	6.1.1.2
15.407(a) A9.2(2)	Peak Power Spectral Density	PPSD	Conducted	Complies	6.1.1.3 A.1.2
15.407(a)(6)	Peak Excursion Ratio	<13dB in any 1MHz bandwidth	Conducted	Complies	6.1.1.4 A.1.3
15.407(g) 15.31 2.1 4.5	Frequency Stability	Limits: contained within band of operation at all times.	Applicant declaration	Complies	6.1.1.5
15.407(f) 5.5	Radio Frequency Radiation Exposure	Exposure to radio frequency energy levels, Maximum Permissible Exposure (MPE)	Conducted	See included MPE exhibit	--

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



List of Measurements (continued)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.407(b)(2) 15.205(a) 15.209(a) 2.2 2.6 A9.3(2) 4.7	Radiated Emissions		Radiated		6.1.2
	Transmitter Radiated Spurious Emissions	Emissions above 1 GHz		Complies	6.1.2.1 6.1.2.2 6.1.2.3
	Radiated Band Edge	Band edge results		Complies	6.1.2.1 6.1.2.2 6.1.2.3
15.407(b)(6) 15.205(a) 15.209(a) 2.2	Radiated Emissions	Emissions <1 GHz (30M-1 GHz)		Complies	6.1.2.4
15.407(b)(6) 15.207 7.2.2	AC Wireline Conducted Emissions 150 kHz–30 MHz	Conducted Emissions	Conducted	N/A EUT is POE powered - not shipped with equipment	6.1.3

Note 1: Test results reported in this document relate only to the items tested

Note 2: The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

Note 3: Section 3.7 Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 27 of 179

6. TEST RESULTS

6.1. Device Characteristics

6.1.1. Conducted Testing

6.1.1.1. 26 dB and 99 % Bandwidth

Conducted Test Conditions for 26 dB and 99% Bandwidth			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	26 dB and 99 % Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a)	Pressure (mBars):	999 - 1001
Reference Document(s):	KDB 789033 - D01 DTS General UNII Test Procedures v01		

Test Procedure for 26 dB and 99% Bandwidth Measurement

The bandwidth at 26 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. KDB 789033 Section 5.1 Emission Bandwidth was used in order to prove compliance. The Resolution Bandwidth was set to approximately 1% of the emission bandwidth.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 28 of 179

Measurement Results for 26 dB and 99 % Operational Bandwidth(s)

Equipment Configuration for 26 dB & 99% Occupied Bandwidth			
Variant:	802.11a	Duty Cycle (%):	tx99
Data Rate:	6 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results								
Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5260.0	22.244	22.445			22.445	22.244		
5300.0	22.445	22.445			22.445	22.445		
5320.0	22.545	23.146			23.146	22.545		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5260.0	16.733	16.633			16.733	16.633		
5300.0	16.733	16.733			16.733	16.733		
5320.0	16.834	16.733			16.834	16.733		

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 29 of 179

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11n HT-20	Duty Cycle (%):	tx99
Data Rate:	6.5 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5260.0	23.447	22.445			23.447	22.445		
5300.0	24.950	23.647			24.950	23.647		
5320.0	23.848	23.246			23.848	23.246		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5260.0	17.836	17.735			17.836	17.735		
5300.0	17.936	17.735			17.936	17.735		
5320.0	17.936	17.735			17.936	17.735		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 30 of 179

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11n HT-40	Duty Cycle (%):	tx99
Data Rate:	13.5 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5270.0	44.890	44.289			44.890	44.289		
5310.0	44.689	44.088			44.689	44.088		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5270.0	36.273	36.273			36.273	36.273		
5310.0	36.273	36.273			36.273	36.273		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 31 of 179

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11a	Duty Cycle (%):	tx99
Data Rate:	6 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5500.0	25.451	25.050			25.451	25.050		
5580.0	26.754	22.946			26.754	22.946		
5700.0	28.056	28.056			28.056	28.056		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5500.0	16.934	16.733			16.934	16.733		
5580.0	16.834	16.733			16.834	16.733		
5700.0	16.834	16.934			16.934	16.834		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 32 of 179

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11n HT-20	Duty Cycle (%):	tx99
Data Rate:	6.5 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5500.0	26.052	23.046			26.052	23.046		
5580.0	26.954	23.747			26.954	23.747		
5700.0	25.852	23.647			25.852	23.647		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5500.0	17.936	17.836			17.936	17.836		
5580.0	17.836	17.836			17.836	17.836		
5700.0	17.836	17.836			17.836	17.836		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 33 of 179

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11n HT-40	Duty Cycle (%):	tx99
Data Rate:	13.5 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5510.0	44.689	44.088			44.689	44.088		
5550.0	44.489	44.890			44.890	44.489		
5670.0	44.689	48.497			48.497	44.689		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5510.0	36.273	36.273			36.273	36.273		
5550.0	36.273	36.273			36.273	36.273		
5670.0	36.273	36.273			36.273	36.273		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 34 of 179

Specification

Limits

FCC, Part 15 §15.407 (a)(1), (a)(2) and Industry Canada RSS-210 § A9.2(2)

(a)(1) For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $+4 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

(a)(2) For the 5.25-5.35 GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $+11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-Gen 4.4

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

Traceability

Test Equipment Used

0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117
--

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 35 of 179

6.1.1.2. Maximum Conducted Output Power

Conducted Test Conditions for Maximum Conducted Output Power			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Maximum Conducted Output Power	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a)	Pressure (mBars):	999 - 1001
Reference Document(s):	KDB 789033 - D01 DTS General UNII Test Procedures v01		
Test Procedure for Maximum Conducted Output Power Measurement			
<p><u>Method PM (Measurement using an RF average power meter)</u>. Section C) 4) of KDB 789033 defines a methodology using an average wideband power meter. Measurements were made while the EUT was operating in a continuous transmission mode (100% duty cycle) at the appropriate center frequency. All cable losses and offsets were taken into consideration in the measured result. All operational modes and frequency bands were measured independently and the resultant \square calculated. For multiple outputs, the measurements were made simultaneously on each output port and summed in a linear fashion. This technique was used in order to prove compliance.</p>			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Antenna Beam and Non-Beam Forming Power Levels

15. 407 (a)(1), (a) (2) Operation with directional antenna gains greater than 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. Further FCC KDB 662911 D01 Multiple Transmitter Output v01 requires that the gain of antennas transmitting the same data (legacy 802.11a mode) must be increased by $10 * \log(N)$ when N is the number of antenna elements.

FCC Limits

Bands 5250 – 5350 and 5470 – 5725 MHz

Limit lesser of: 250 mW or $11 \text{ dBm} + 10 \log(B) \text{ dBm}$. where B is the 26-dB emission bandwidth in MHz.

Mode	Frequency Range (MHz)	Minimum 26 dB Bandwidth (MHz)	11 + 10 Log (B) (dBm)	Limit (dBm)
a	5250 – 5350	22.244	24.47	+24.00
HT-20		22.445	24.51	+24.00
HT-40	5470 – 5725	44.088	27.44	+24.00

Industry Canada Limits

Bands 5250 – 5350 and 5470 – 5725 MHz

Maximum conducted power shall not exceed 250 mW or $11 \text{ dBm} + 10 \log(B) \text{ dBm}$. Where B is the 99% emission bandwidth.

Mode	Frequency Range (MHz)	Minimum 99% Bandwidth (MHz)	11 + 10 Log (B) (dBm)	Limit (dBm)
a	5250 – 5350	16.633	23.21	+23.21
HT-20		17.735	23.49	+23.49
HT-40	5470 – 5725	36.273	26.60	+24.00

The APINR108, APINR109 has no beam-forming capability



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 37 of 179

MIMO Operation 5250-5350 and 5470 – 5725 MHz

Antenna	Gain	Max. Allowable Conducted Peak Power (dBm)		Maximum EIRP
Model	(dBi)	Non-Beam Forming	Beam Forming	(dBm)
AP-ANT-1B	5.8	+24.0	N/A	+29.8
AP-ANT-13B	3.3	+24.0		+27.3
AP-ANT-16	4.7	+24.0		+28.7
AP-ANT-17	5.0	+24.0		+29.0
AP-ANT-18	7.5	+22.5		+30.0
AP-ANT-19	6.0	+24.0		+30.0

Non-MIMO Operation (Legacy) 5250-5350 and 5470 – 5725 MHz

Antenna	Gain	Increased Gain V's No. Antenna Ports		Total Gain	Max. Allowable Conducted Peak Power	Maximum EIRP
Model	(dBi)	Ports	dB	dBi	(dBm)	(dBm)
AP-ANT-1B	5.8	2	3.01	8.81	+21.19	+30.0
AP-ANT-13B	3.3	2	3.01	6.31	+23.69	+30.0
AP-ANT-16	4.7	2	3.01	7.71	+22.29	+30.0
AP-ANT-17	5.0	2	3.01	8.01	+21.99	+30.0
AP-ANT-18	7.5	2	3.01	10.51	+19.49	+30.0
AP-ANT-19	6.0	2	3.01	9.01	+20.99	+30.0

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 38 of 179

Measurement Results for Maximum Conducted Output Power

5250 - 5350 MHz

Equipment Configuration for Peak Transmit Power

Variant:	802.11a	Duty Cycle (%):	tx99
Data Rate:	6 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	N/A
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5260.0	18.66	16.68			20.79	22.244	24.00	-3.21	18.00
5300.0	18.81	17.44			21.19	22.445	24.00	-2.81	18.00
5320.0	18.69	17.64			21.21	22.545	24.00	-2.79	18.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-20	Duty Cycle (%):	tx99
Data Rate:	6.5 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	N/A
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5260.0	18.55	16.25			20.56	22.445	24.00	-3.44	18.00
5300.0	18.72	16.88			20.91	23.647	24.00	-3.09	18.00
5320.0	19.07	17.33			21.30	23.246	24.00	-2.70	18.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 39 of 179

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-40	Duty Cycle (%):	tx99
Data Rate:	13.5 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	N/A
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5270.0	18.40	16.42			20.53	44.289	24.00	-3.47	17.50
5310.0	18.86	16.95			21.02	44.088	24.00	-2.98	17.50

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 40 of 179

5470 - 5725 MHz

Equipment Configuration for Peak Transmit Power

Variant:	802.11a	Duty Cycle (%):	tx99
Data Rate:	6 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	N/A
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5500.0	18.70	17.89			21.32	25.050	24.00	-2.68	18.00
5580.0	18.67	17.96			21.34	22.946	24.00	-2.66	18.00
5700.0	18.35	18.62			21.50	28.056	24.00	-2.50	20.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-20	Duty Cycle (%):	tx99
Data Rate:	6.5 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	N/A
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5500.0	18.69	17.48			21.14	23.046	24.00	-2.86	18.00
5580.0	18.63	17.59			21.15	23.747	24.00	-2.85	18.00
5700.0	18.27	17.62			20.97	23.647	24.00	-3.03	18.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 41 of 179

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-40	Duty Cycle (%):	tx99
Data Rate:	13.5 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	N/A
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5510.0	18.68	17.44			21.11	44.088	24.00	-2.89	17.50
5550.0	18.72	17.62			21.22	44.489	24.00	-2.78	17.50
5670.0	18.15	17.48			20.84	44.689	24.00	-3.16	18.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification Limits

FCC, Part 15 §15.407 (a)(1), (a)(2) and Industry Canada RSS-210 § A9.2(2)

(a)(1) For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $+4 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

(a)(2) For the 5.25-5.35 and 5470-5725 MHz GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $+11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-210 §A9.2(2)

For the band 5150-5250 MHz, the maximum equivalent isotropically radiated power (e.i.r.p.) shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

For the band 5250-5350 MHz and 5470-5725 MHz, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

Traceability

Test Equipment Used

0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117
--



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 43 of 179

6.1.1.3. Peak Power Spectral Density

Conducted Test Conditions for Power Spectral Density			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Power Spectral Density	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)	Pressure (mBars):	999 - 1001
Reference Document(s):	KDB 789033 - D01 DTS General UNII Test Procedures v01		

Test Procedure for Power Spectral Density

The In-Band power spectral density was measured using the measure and sum approach per FCC KDB 662911 (D01 Multiple Transmitter Output v01.)

Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with N transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were calculated on a computer, and the results read back into the spectrum analyzer as a data file to produce a representative plot of total spectral power density.

Calculated Power = $A + 10 \log (1/x)$ dBm

A = Total Power Spectral Density [10 Log₁₀ (10a/10 + 10 b/10 + 10c/10 + 10d/10)]

x = Duty Cycle

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 44 of 179

Equipment Configuration for Peak Power Spectral Density

Variant:	802.11a	Duty Cycle (%):	tx99
Data Rate:	6 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density Σ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
	MHz	a	b	c			
5260.0	7.615	5.508			9.698	11.0	-1.3
5300.0	7.582	6.240			9.973	11.0	-1.0
5320.0	7.365	6.073			9.777	11.0	-1.2

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	± 2.81 dB

Equipment Configuration for Peak Power Spectral Density

Variant:	802.11n HT-20	Duty Cycle (%):	tx99
Data Rate:	6.5 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density Σ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
	MHz	a	b	c			
5260.0	6.811	4.550			8.836	11.0	-2.2
5300.0	7.309	4.925			9.289	11.0	-1.7
5320.0	7.320	5.200			9.398	11.0	-1.6

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	± 2.81 dB

[Click on the links above to see the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 45 of 179

Equipment Configuration for Peak Power Spectral Density

Variant:	802.11n HT-40	Duty Cycle (%):	tx99
Data Rate:	13.5 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density Σ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
	MHz	a	b	c			
5270.0	4.264	1.685			6.173	11.0	-4.8
5310.0	4.414	2.323			6.503	11.0	-4.5

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	± 2.81 dB

[Click on the links above to see the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 46 of 179

Equipment Configuration for Peak Power Spectral Density

Variant:	802.11a	Duty Cycle (%):	tx99
Data Rate:	6 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density Σ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5500.0	7.436	6.545			10.024	11.0	-1.0
5580.0	7.260	6.686			9.993	11.0	-1.0
5700.0	7.426	7.687			10.569	11.0	-0.4

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	± 2.81 dB

Equipment Configuration for Peak Power Spectral Density

Variant:	802.11n HT-20	Duty Cycle (%):	tx99
Data Rate:	6.5 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density Σ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5500.0	6.944	5.734			9.391	11.0	-1.6
5580.0	6.580	5.507			9.087	11.0	-1.9
5700.0	6.730	5.688			9.250	11.0	-1.7

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	± 2.81 dB

[Click on the links above to see the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 47 of 179

Equipment Configuration for Peak Power Spectral Density

Variant:	802.11n HT-40	Duty Cycle (%):	tx99
Data Rate:	13.5 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results							
Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density Σ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5510.0	3.741	2.548			6.196	11.0	-4.8
5550.0	4.031	2.949			6.534	11.0	-4.5
5670.0	3.311	2.589			5.975	11.0	-5.0

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	± 2.81 dB

[Click on the links above to see the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 48 of 179

Specification

FCC, Part 15 §15.407 (a)(1), (a)(2)

5150 – 5250 MHz

(a)(1) The peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

5250 – 5350 MHz & 5470 – 5725 MHz

(a)(2) The peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-210 § A9.2(1), A9.2(2)

5150 – 5250 MHz

§ **A9.2(1)** The eirp spectral density shall not exceed +10 dBm in any 1 MHz band

5250 – 5350 MHz & 5470 – 5725 MHz

§ **A9.2(2)** The power spectral density shall not exceed +11 dBm in any 1 MHz band

Traceability

Test Equipment Used

0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117
--

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 49 of 179

6.1.1.4. Peak Excursion Ratio

Conducted Test Conditions for Peak Excursion Ratio			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Peak Excursion Ratio	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a)(6)	Pressure (mBars):	999 - 1001
Reference Document(s):	KDB 789033 - D01 DTS General UNII Test Procedures v01		

Test Procedure for Peak Excursion Ratio

Compliance with the peak excursion requirement is demonstrated by confirming the ratio of the maximum of the peak-hold spectrum to the maximum of the average spectrum during continuous transmission. Section F) of KDB 789033 was used in order to prove compliance. This is a conducted measurement using a spectrum analyzer using dual traces. Peak Excursion Ratio is the difference in amplitude (dB) between both traces; The following identifies two spectrum traces on the same plot. Trace 1 is the max hold Peak detector, and Trace 2 is the recalled trace data from Peak Power Spectral Density measurements. Each frequency and operational mode is recalled in order to prove compliance.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 50 of 179

Equipment Configuration for Peak Excursion Ratio

Variant:	802.11a	Duty Cycle (%):	tx99
Data Rate:	6 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency MHz	Measured Peak Excursion (dB)				Ratio (dB)		Limit dB	Lowest Margin MHz
	Port(s)				Highest	Lowest		
	a	b	c	d				
5260.0	8.71				8.71	8.71	13.0	-4.29

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Equipment Configuration for Peak Excursion Ratio

Variant:	802.11n HT-20	Duty Cycle (%):	tx99
Data Rate:	6.5 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency MHz	Measured Peak Excursion (dB)				Ratio (dB)		Limit dB	Lowest Margin MHz
	Port(s)				Highest	Lowest		
	a	b	c	d				
5260.0	9.64				9.64	9.64	13.0	-3.36

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

[Click on the links above to see the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 51 of 179

Equipment Configuration for Peak Excursion Ratio

Variant:	802.11n HT-40	Duty Cycle (%):	tx99
Data Rate:	13.5 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency MHz	Measured Peak Excursion (dB)				Ratio (dB)		Limit dB	Lowest Margin MHz
	Port(s)				Highest	Lowest		
	a	b	c	d				
5270.0	9.08				9.08	9.08	13.0	-3.92

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

[Click on the links above to see the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 52 of 179

Equipment Configuration for Peak Excursion Ratio

Variant:	802.11a	Duty Cycle (%):	tx99
Data Rate:	6 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency MHz	Measured Peak Excursion (dB)				Ratio (dB)		Limit dB	Lowest Margin MHz
	Port(s)				Highest	Lowest		
	a	b	c	d				
5500.0	9.44				9.44	9.44	13.0	-3.56

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Equipment Configuration for Peak Excursion Ratio

Variant:	802.11n HT-20	Duty Cycle (%):	tx99
Data Rate:	6.5 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency MHz	Measured Peak Excursion (dB)				Ratio (dB)		Limit dB	Lowest Margin MHz
	Port(s)				Highest	Lowest		
	a	b	c	d				
5500.0	9.29				9.29	9.29	13.0	-3.71

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

[Click on the links above to see the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 53 of 179

Equipment Configuration for Peak Excursion Ratio

Variant:	802.11n HT-40	Duty Cycle (%):	tx99
Data Rate:	13.5 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable		
Engineering Test Notes:			

Test Measurement Results

Test Frequency MHz	Measured Peak Excursion (dB)				Ratio (dB)		Limit dB	Lowest Margin MHz
	Port(s)				Highest	Lowest		
	a	b	c	d				
5510.0	10.45				10.45	10.45	13.0	-2.55

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

[Click on the links above to see the plot](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 54 of 179

Specification

Limits

§15.407 (a)(6) The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified in this paragraph) shall not exceed 13dB across any 1MHz bandwidth or the emission bandwidth whichever is less

Traceability

Test Equipment Used

0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117
--

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 55 of 179

6.1.1.5. Frequency Stability

FCC, Part 15 Subpart C §15.407(g)
Industry Canada RSS-210 §2.1

Test Procedure

The manufacturer of the equipment is responsible for ensuring that the frequency stability is such that emissions are always maintained within the band of operation under all conditions.

Manufacturer Declaration

The frequency stability of the reference oscillator sets the frequency stability of the RF transceiver signals. Therefore all of the RF signals should have ± 20 ppm stability.

This stability accounts for room temp tolerance of the crystal oscillator circuit, frequency variation across temperature, and crystal ageing.

± 20 ppm at 5.250 GHz translates to a maximum frequency shift of ± 105 KHz. As the edge of the channels is at least one MHz from either of the band edges, ± 105 KHz is more than sufficient to guarantee that the intentional emission will remain in the band over the entire operating range of the EUT.

Specification

Limits

§15.407 (g) Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 56 of 179

6.1.2. Radiated Emission Testing

FCC, Part 15 Subpart C §15.407(b)(2), §15.205(a)/15.209(a)
Industry Canada RSS-210 §A9.3(2); §2.2; §2.6; RSS-Gen §4.7

Test Procedure

Testing was performed in a 3-meter anechoic chamber. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. Preliminary emissions were recorded with in Spectrum Analyzer mode, using a maximum peak detector while in peak hold mode. Depending on the frequency band spanned a notch filter and/or waveguide filter was used to remove the fundamental frequency.

Emissions nearest the limits were chosen for maximization and formal measurement using a CISPR compliant receiver. Emissions above 1000 MHz are measured utilizing a CISPR compliant average detector with a tuned receiver, using a bandwidth of 1 MHz. Emissions from 30 MHz – 1000 MHz are measured utilizing a CISPR compliant quasi-peak detector with a tuned receiver, using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed.

Radiated emissions testing was performed for three different antennas that represent the highest gain for each antenna type intended for use with the EUT;- Integral antenna (As used in APINR109) ; ANT-18 60 degree sector antenna; ANT-19 monopole antenna.

Testing was performed in worst case mode for emissions (11a. mode with the highest spectral density). Radiated Band-Edge testing was performed in all modes for each antenna.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

$$CORR = \text{Correction Factor} = CL - AG + NFL$$

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

Field Strength Calculation Example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dB μ V/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

$$\text{Therefore: } -27 \text{ dBm/MHz} = 68.23 \text{ dB}\mu\text{V/m}$$

Note: The data in this Section identifies that the EUT is in compliance with the -27dBm/MHz EIRP limit (68.23 dB μ V/m) for out of band emissions. All out of band emissions are less than 68.23 dB μ V/m.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 58 of 179

Specification

Radiated Spurious Emissions

15.407 (b)(2). All emissions outside of the 5,150-5,350MHz band shall not exceed an EIRP of -27dBm/MHz.

FCC §15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

FCC §15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

FCC §15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

RSS-210 §A9.3(2) For transmitters operating in the 5250-5350 MHz band, all emissions outside the 5150-5350 MHz band shall not exceed -27 dBm/MHz e.i.r.p. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band shall not exceed out of band emission limit of 27 dBm/MHz e.i.r.p. in the 5150-5250 MHz band in order to operate indoor/outdoor, or alternatively shall comply with the spectral power density for operation within the 5150-5250 MHz band and shall be labeled "for indoor use only".

RSS-Gen §4.7 The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate of carrier frequency), or from 30 MHz, whichever is the lowest frequency, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

RSS-Gen §6 Receiver Spurious Emission Standard

If a radiated measurement is made, all spurious emissions shall comply with the limits of the following Table. The resolution bandwidth of the spectrum analyzer shall be 100 kHz for spurious emission measurements below 1.0 GHz and 1.0 MHz for measurements above 1.0 GHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 59 of 179

Table 1: FCC 15.209 Spurious Emissions Limits

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Traceability:

Test Equipment Used
0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 60 of 179

6.1.2.1. Integral Antenna APINR109

Low

Test Freq.	5260 MHz	Engineer	JMH
Variant	802.11a; 6 Mbs	Temp (°C)	24
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	18	Press. (mBars)	1001
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

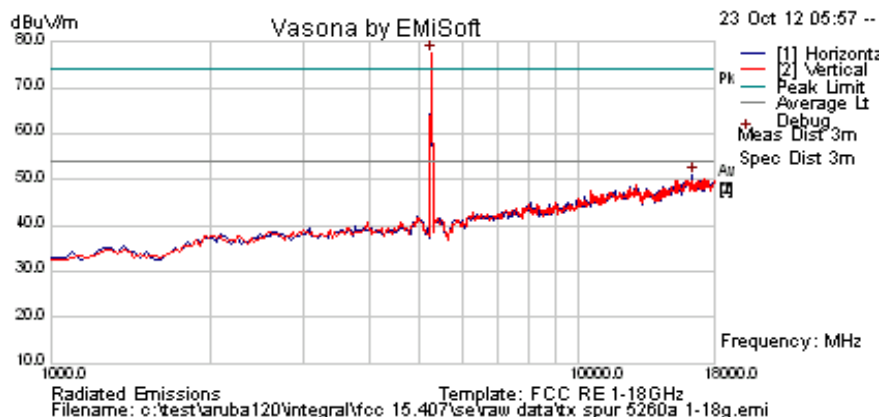

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5258.517	82.5	4.6	-9.7	77.4	Peak [Scan]	V						FUND
16398.798	41.8	8.9	0.2	50.9	Peak [Scan]	H	150	0	54.0	-3.1	Pass	Noise
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 61 of 179

Mid

Test Freq.	5300 MHz	Engineer	JMH
Variant	802.11a; 6 Mbs	Temp (°C)	24
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	ART = 18	Press. (mBars)	1001
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

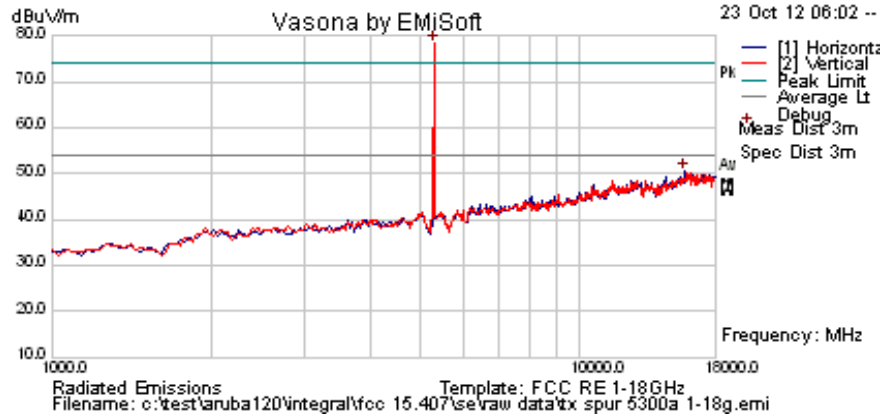

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5292.585	83.3	4.6	-9.6	78.3	Peak [Scan]	V						FUND
15785.571	42.0	8.7	-0.3	50.4	Peak [Scan]	H	100	0	54.0	-3.6	Pass	Noise

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 62 of 179

High

Test Freq.	5320 MHz	Engineer	JMH
Variant	802.11a; 6 Mbs	Temp (°C)	24
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	ART = 18	Press. (mBars)	1001
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

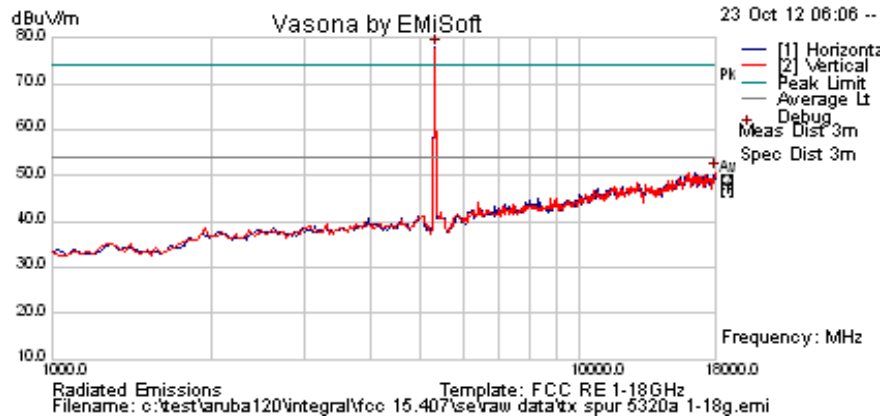

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5326.653	82.7	4.6	-9.5	77.8	Peak [Scan]	H						FUND
18000.000	41.3	8.8	0.7	50.8	Peak [Scan]	V	100	0	54.0	-3.2	Pass	Noise

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




11a

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
Ref Lvl	62.56 dBµV	VBW	1 MHz		
100 dBµV	5.35022044 GHz	SWT	20 s	Unit	dBµV

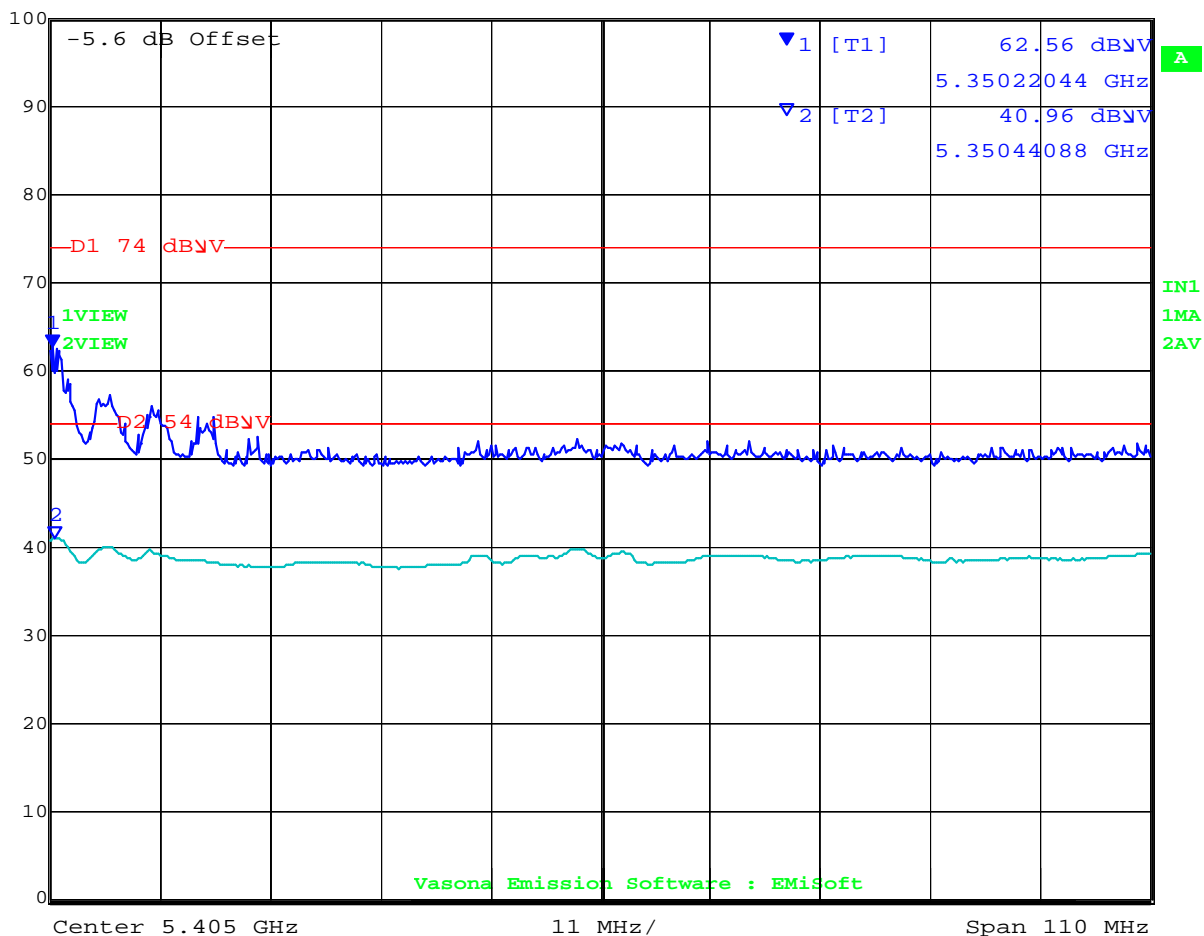

Date: 23.OCT.2012 07:59:05

NART = 18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




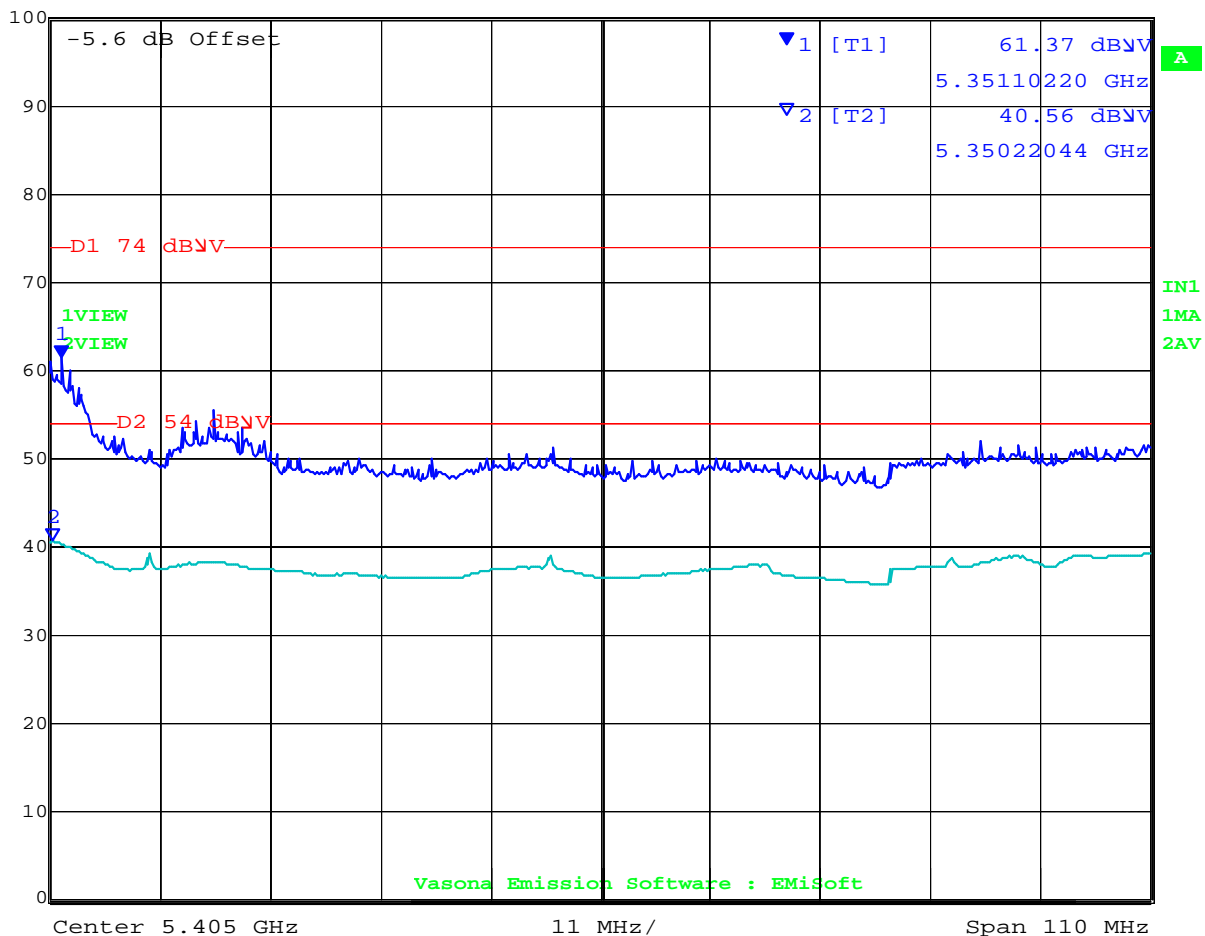
Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 64 of 179

HT-20

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

 **Marker 1 [T1]** RBW 1 MHz RF Att 20 dB
Ref Lvl 61.37 dBV VBW 1 MHz
100 dBV 5.35110220 GHz SWT 20 s Unit dBV



Date: 23.OCT.2012 07:52:16

NART = 18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




HT-40

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
Ref Lvl	67.64 dB μ V	VBW	1 MHz		
100 dB μ V	5.3500000 GHz	SWT	20 s	Unit	dB μ V

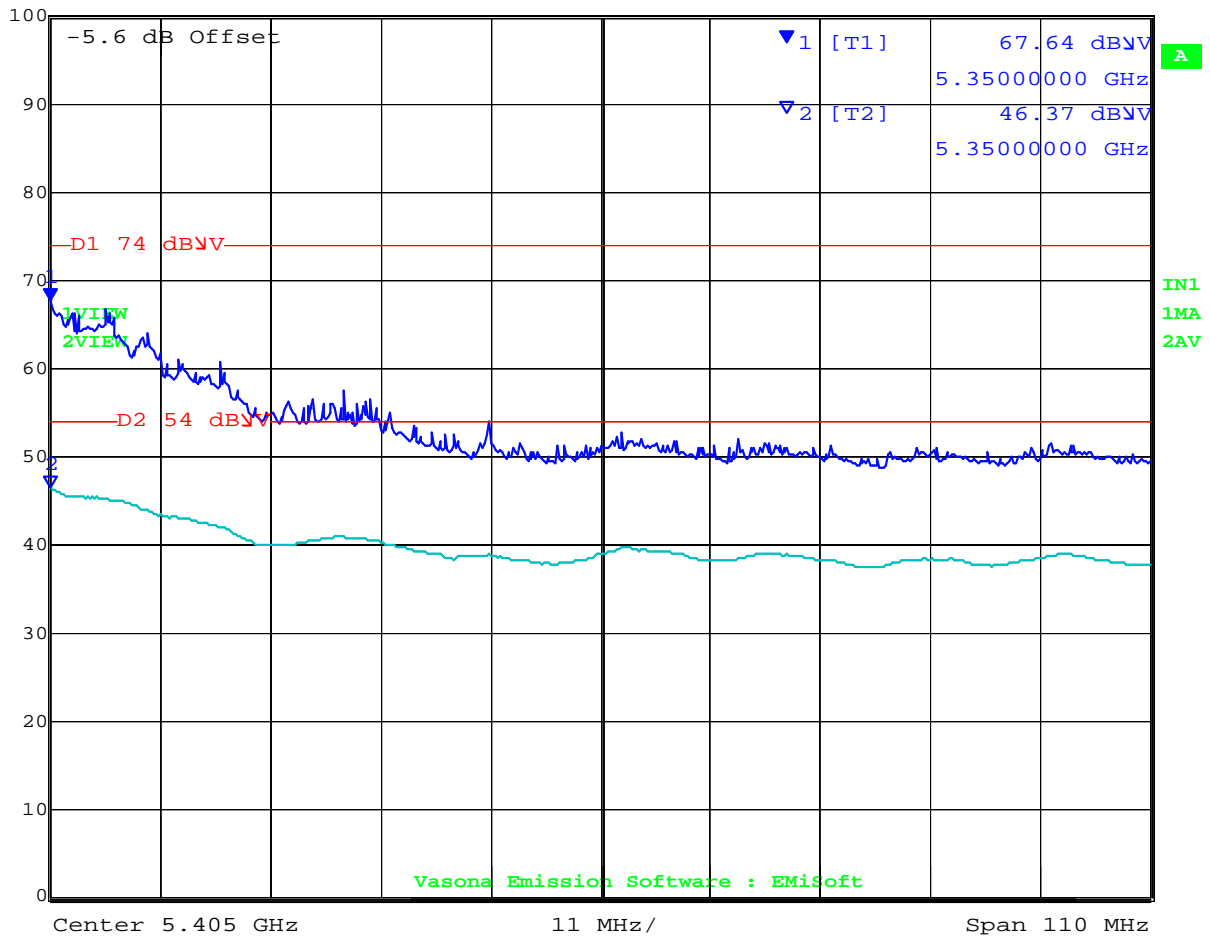

Date: 23.OCT.2012 07:39:29

NART = 18


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 66 of 179

Low

Test Freq.	5500 MHz	Engineer	JMH
Variant	802.11a; 6 Mbs	Temp (°C)	24
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	18	Press. (mBars)	1001
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

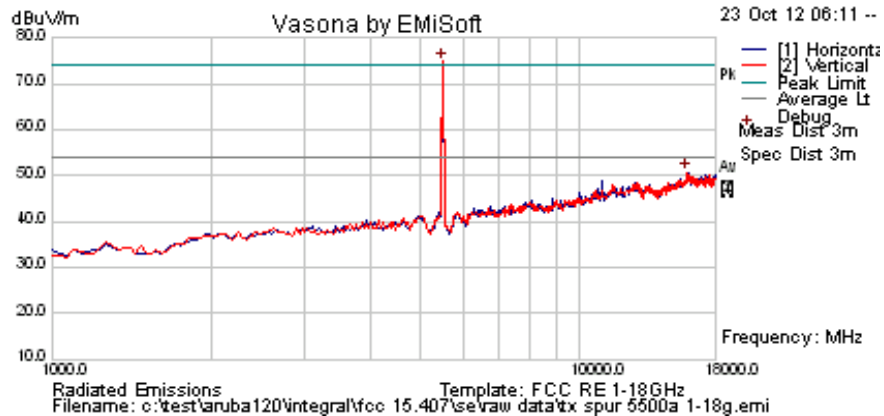

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5496.993988	79.9	4.6	-9.6	74.9	Peak [Scan]	V						FUND
15921.844	41.8	8.9	-0.1	50.6	Peak [Scan]	V	100	0	54.0	-3.4	Pass	Noise

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 67 of 179

Mid

Test Freq.	5580 MHz	Engineer	JMH
Variant	802.11a; 6 Mbs	Temp (°C)	24
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	18	Press. (mBars)	1001
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

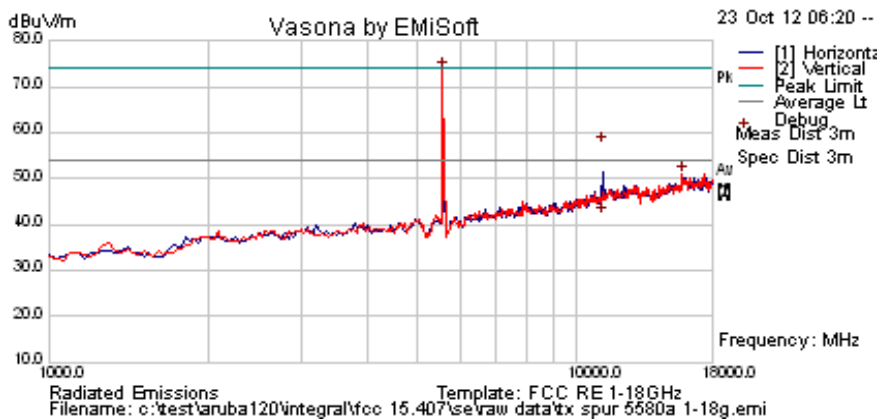

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5565.130261	78.8	4.7	-9.7	73.7	Peak [Scan]	V						FUND
15819.639	42.5	8.7	-0.3	51.0	Peak [Scan]	V	150	0	54.0	-3.0	Pass	Noise
11160.882	53.1	6.9	-3.0	57.1	Peak Max	H	120	175	74.0	-16.9	Pass	RB
11160.882	38.0	6.9	-3.0	41.9	Average Max	H	120	175	54.0	-12.1	Pass	RB

Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
	NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 68 of 179

High

Test Freq.	5700 MHz	Engineer	JMH
Variant	802.11a; 6 Mbs	Temp (°C)	24
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	32
Power Setting	18	Press. (mBars)	1001
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

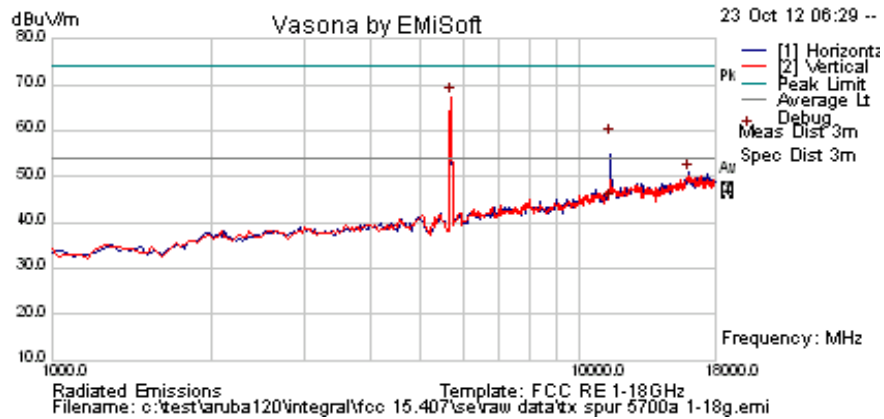

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5701.402806	72.2	4.7	-9.6	67.4	Peak [Scan]	V						FUND
16024.048	41.7	9.0	0.2	50.9	Peak [Scan]	H	150	0	54.0	-3.1	Pass	Noise
11397.235	54.1	6.8	-2.3	58.7	Peak Max	H	126	171	74.0	-15.4	Pass	RB
11397.235	39.8	6.8	-2.3	44.4	Average Max	H	126	171	54.0	-9.6	Pass	RB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




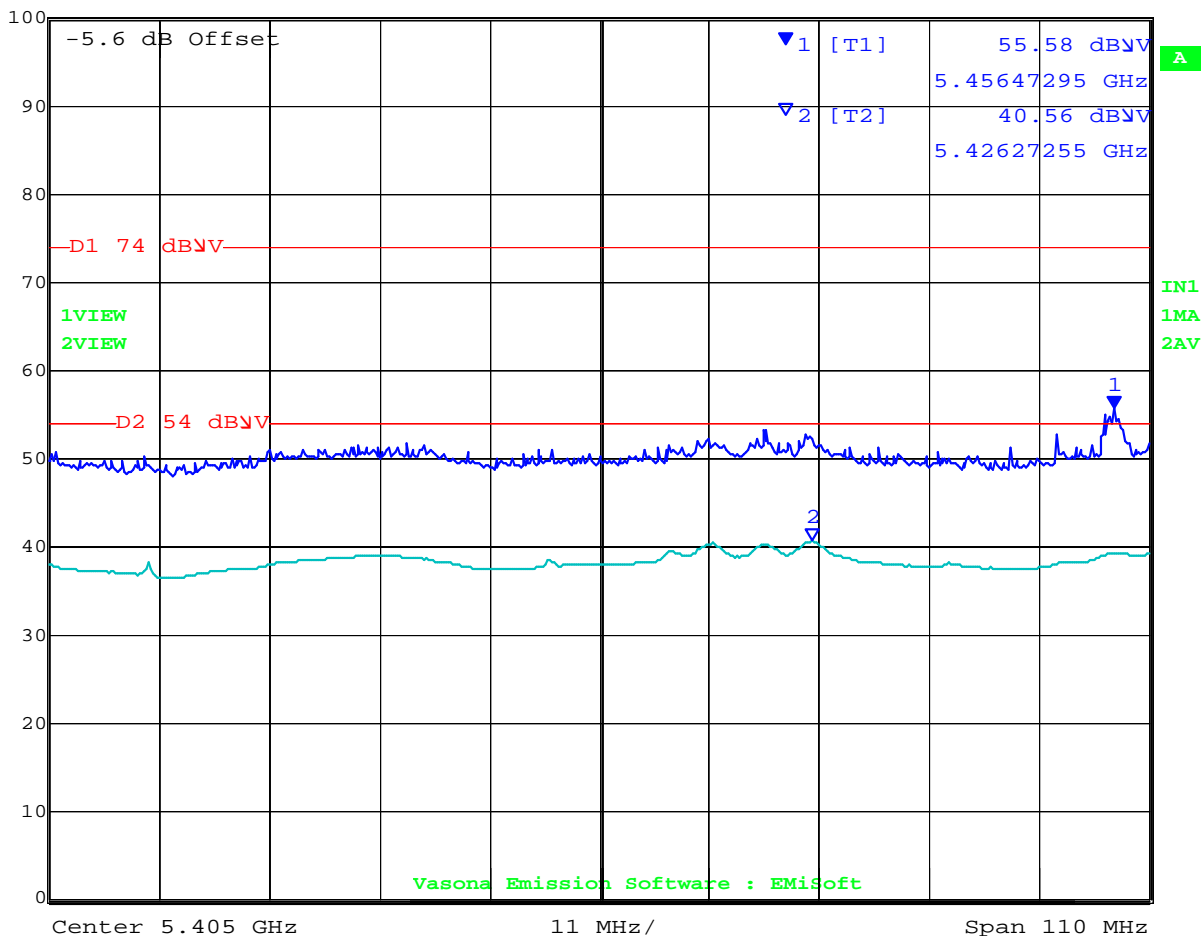
Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 69 of 179

11a

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

 **Marker 1 [T1]** RBW 1 MHz RF Att 20 dB
Ref Lvl 55.58 dBV VBW 1 MHz
100 dBV 5.45647295 GHz SWT 20 s Unit dBV



Date: 23.OCT.2012 07:20:47

NART = 18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




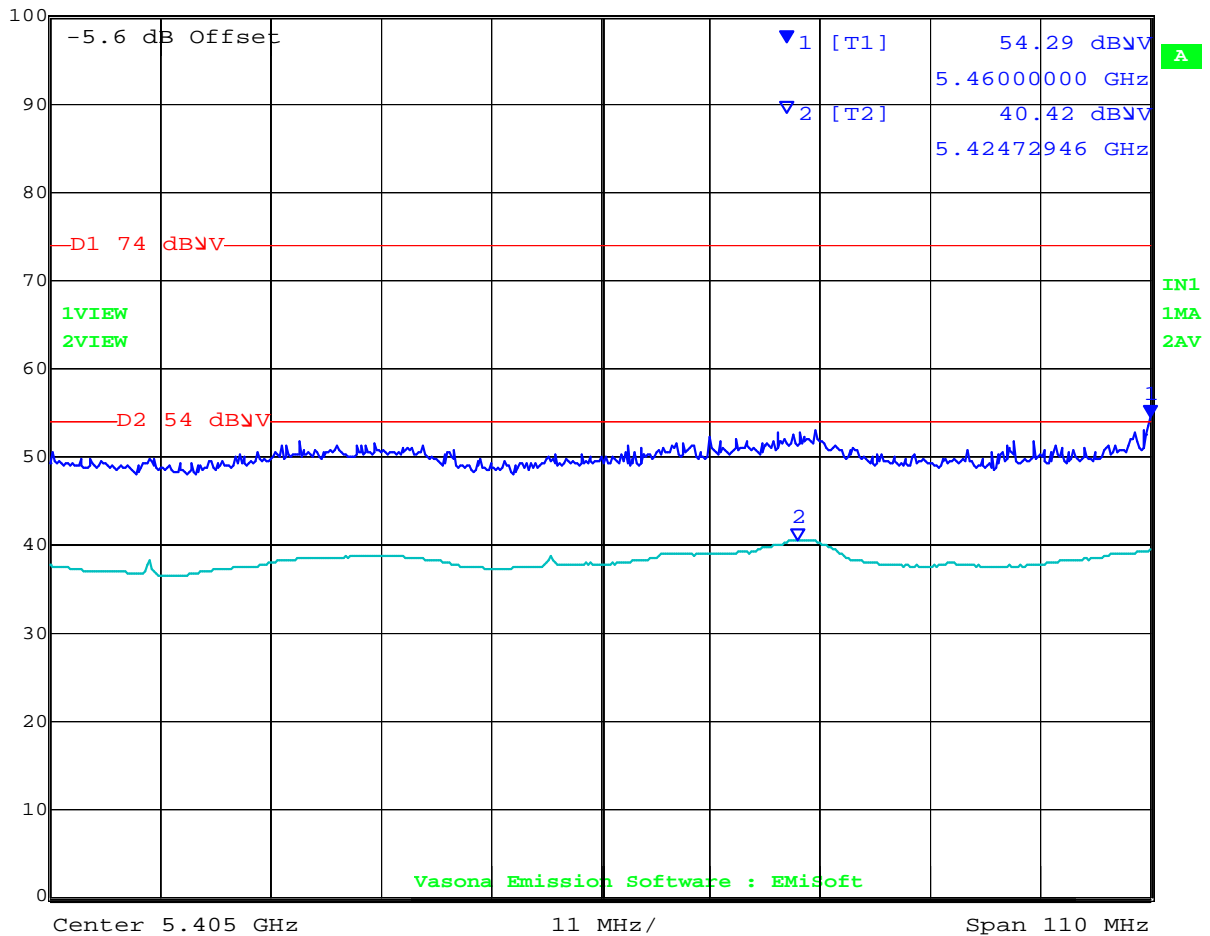
Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 70 of 179

HT-20

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

 **Marker 1 [T1]** RBW 1 MHz RF Att 20 dB
Ref Lvl 54.29 dBV VBW 1 MHz
100 dBV 5.46000000 GHz SWT 20 s Unit dBV



Date: 23.OCT.2012 07:24:09

NART = 18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




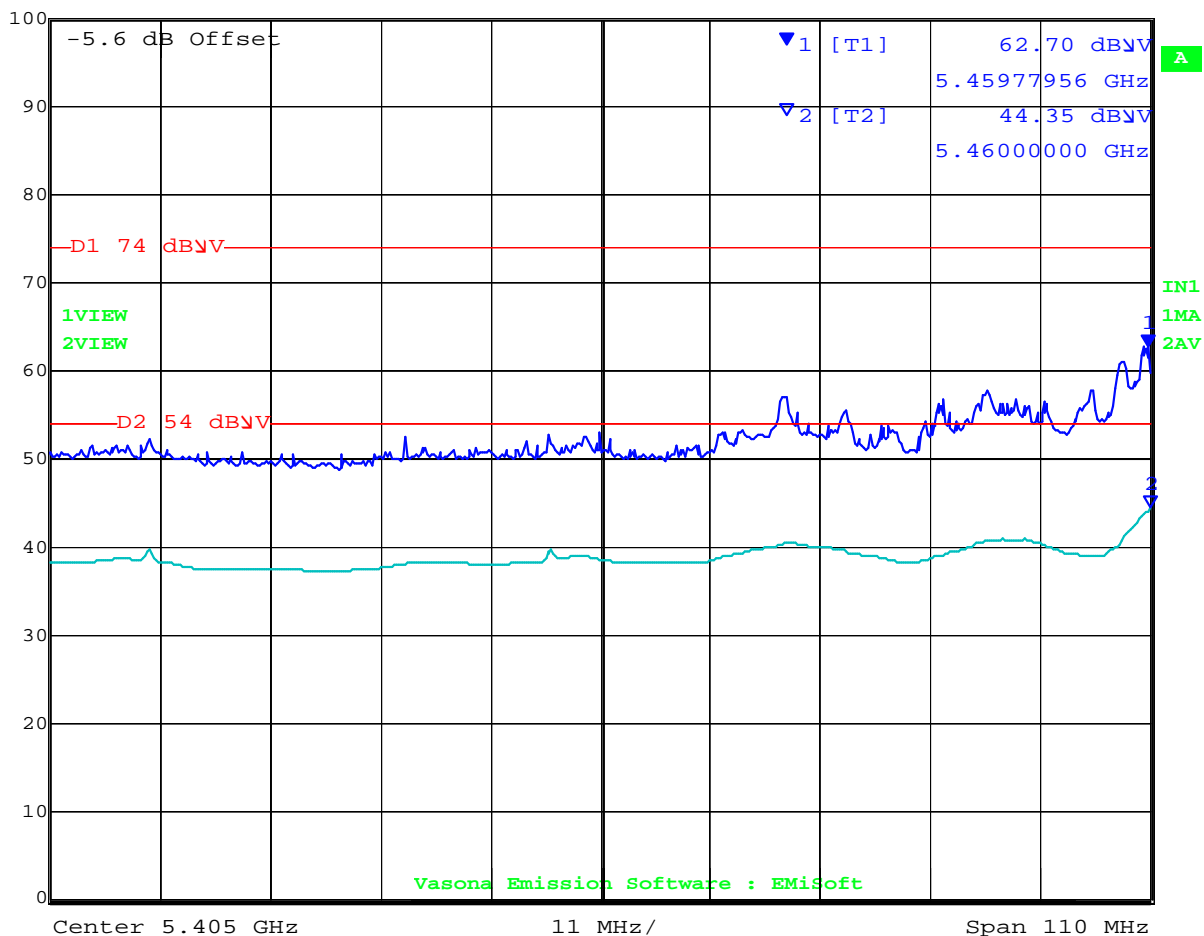
Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 71 of 179

HT-40

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

 Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 62.70 dBμV VBW 1 MHz
100 dBμV 5.45977956 GHz SWT 20 s Unit dBμV



Date: 23.OCT.2012 07:29:00

NART = 18


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 72 of 179

6.1.2.2. ANT-18 60 Degree Sector antenna

Test Freq.	5260 MHz	Engineer	JMH
Variants	802.11a; 6 Mbs	Temp (°C)	24
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	996
Antenna	ANT-18 Sector 60	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

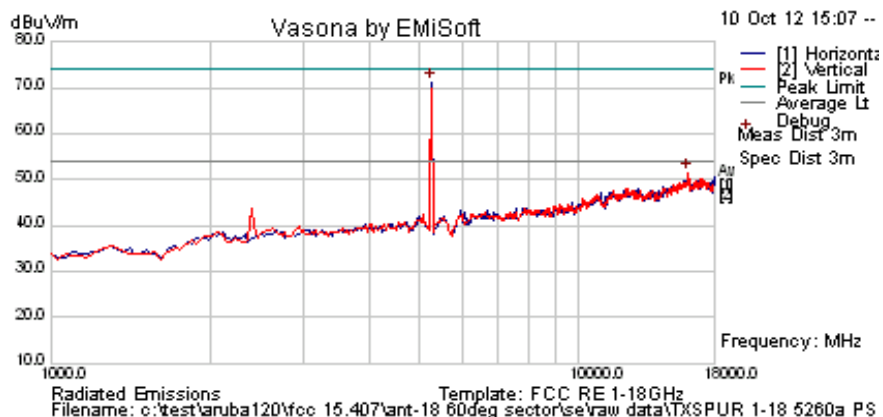

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5258.517	76.5	4.6	-9.7	71.4	Peak [Scan]	H						FUND
16058.116	42.3	9.0	0.3	51.6	Peak [Scan]	V	100	0	54.0	-2.4	Pass	Noise
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 73 of 179

Test Freq.	5300 MHz	Engineer	JMH
Variant	802.11a; 6 Mbs	Temp (°C)	24
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	ART = 18	Press. (mBars)	996
Antenna	ANT-18 Sector 60	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

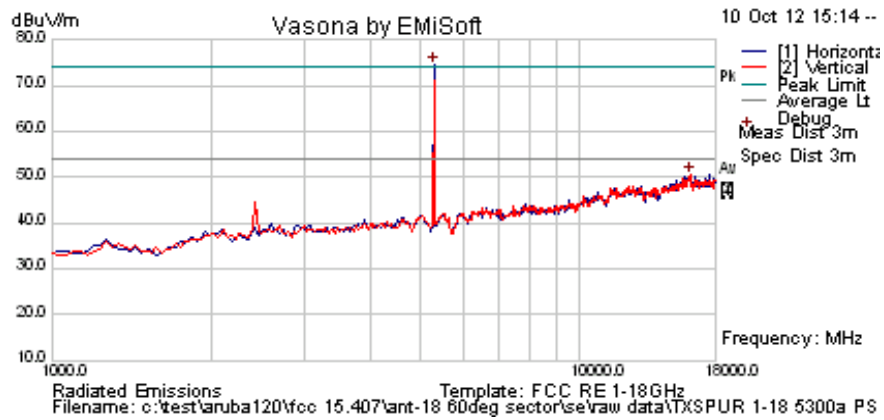

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5292.585	79.6	4.6	-9.6	74.6	Peak [Scan]	H						FUND
16160.321	41.5	9.0	0.2	50.6	Peak [Scan]	V	200	0	54.0	-3.4	Pass	Noise


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 74 of 179

Test Freq.	5320 MHz	Engineer	JMH
Variant	802.11a; 6 Mbs	Temp (°C)	24
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	ART = 18	Press. (mBars)	996
Antenna	ANT-18 Sector 60	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

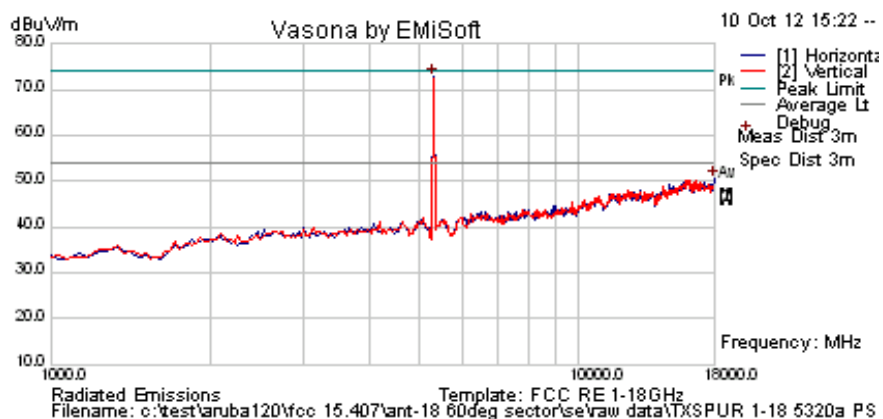

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5292.585	77.8	4.6	-9.6	72.8	Peak [Scan]	H						FUND
17965.932	41.0	8.8	0.7	50.4	Peak [Scan]	H	200	0	54.0	-3.6	Pass	Noise

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 75 of 179

11a

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 64.19 dBV VBW 1 MHz
98.9 dBV 5.35022044 GHz SWT 20 s Unit dBV

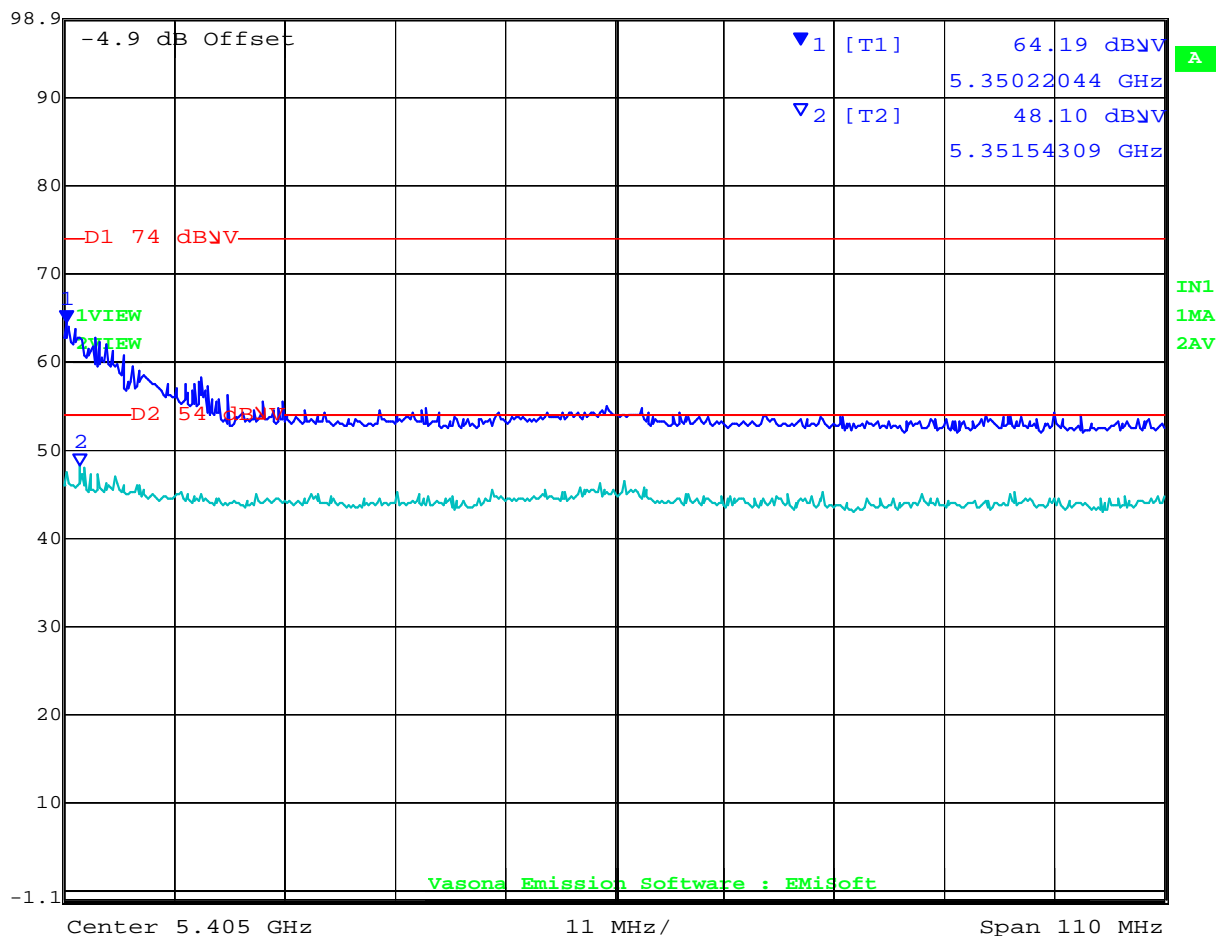

Date: 11.OCT.2012 08:43:37

NART = 18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 76 of 179

HT-20

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
Ref Lvl	68.07 dBV	VBW	1 MHz		
98.9 dBV	5.35220441 GHz	SWT	20 s	Unit	dBV

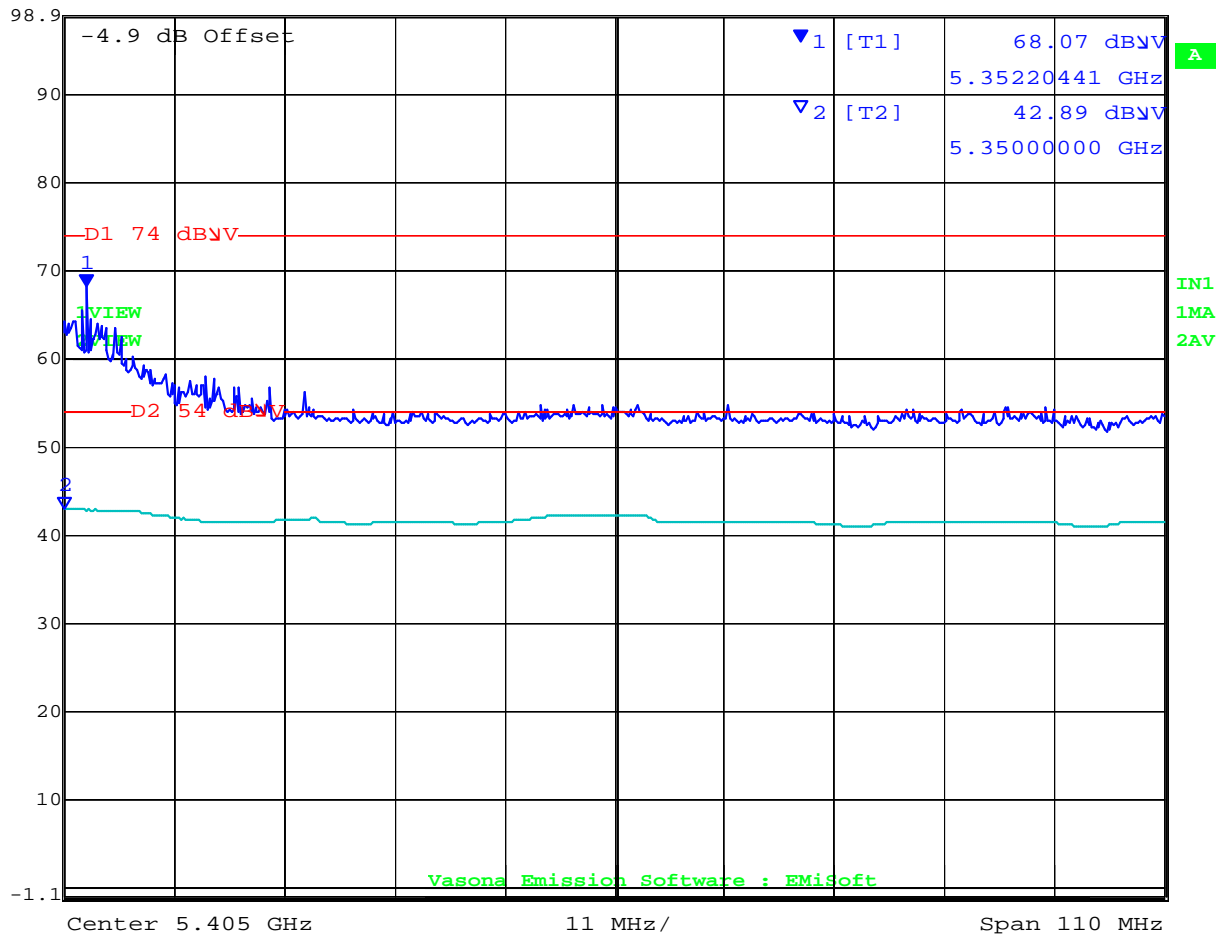

Date: 11.OCT.2012 08:46:03

NART = 18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 77 of 179

HT-40

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

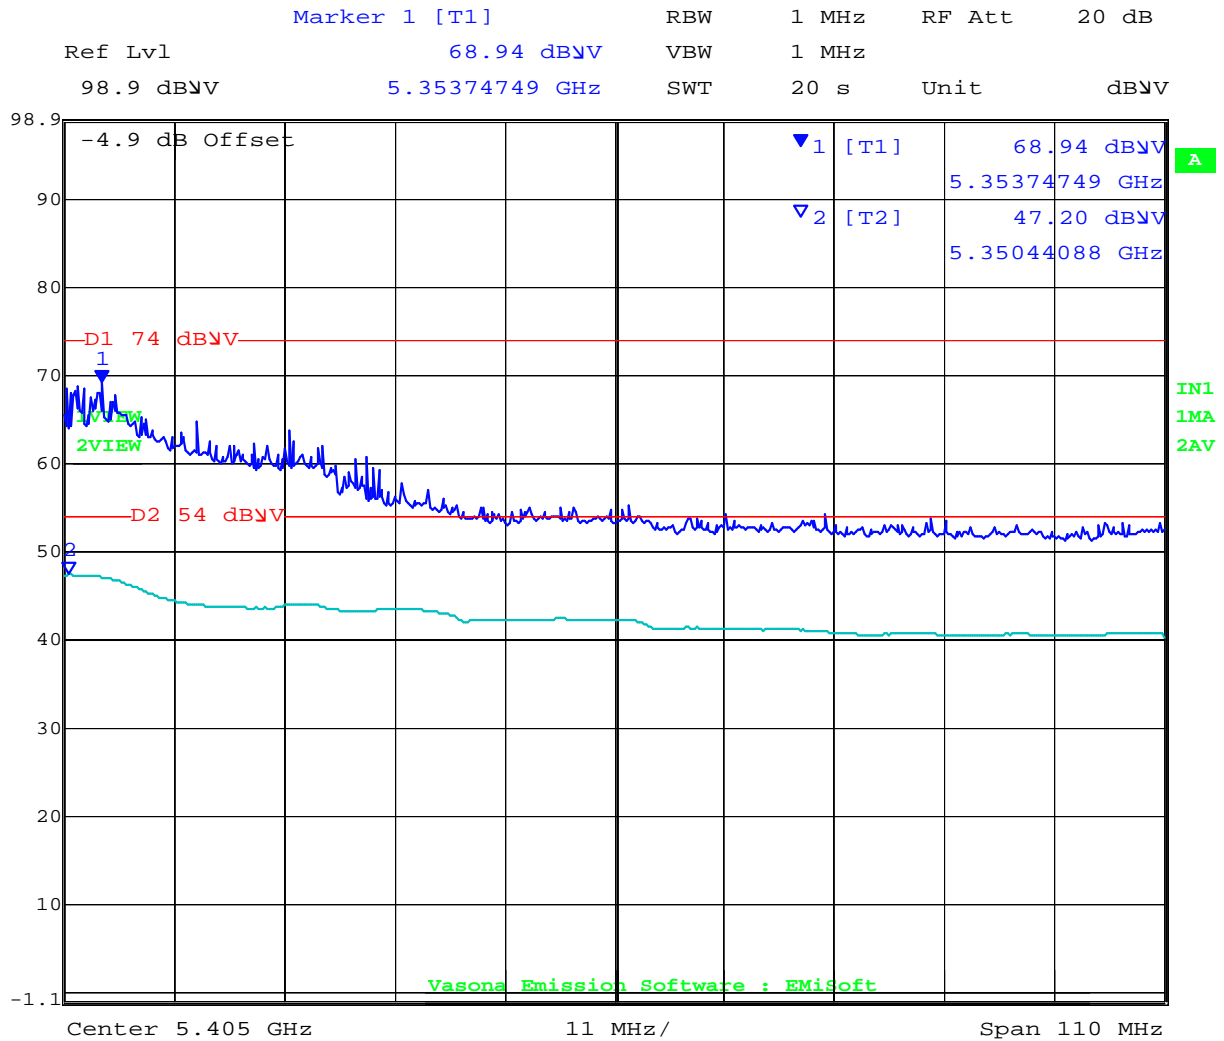

Date: 11.OCT.2012 08:49:37


NART = 18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 78 of 179

Test Freq.	5500 MHz	Engineer	JMH
Variant	802.11a; 6 Mbs	Temp (°C)	24
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	996
Antenna	ANT-18 Sector 60	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

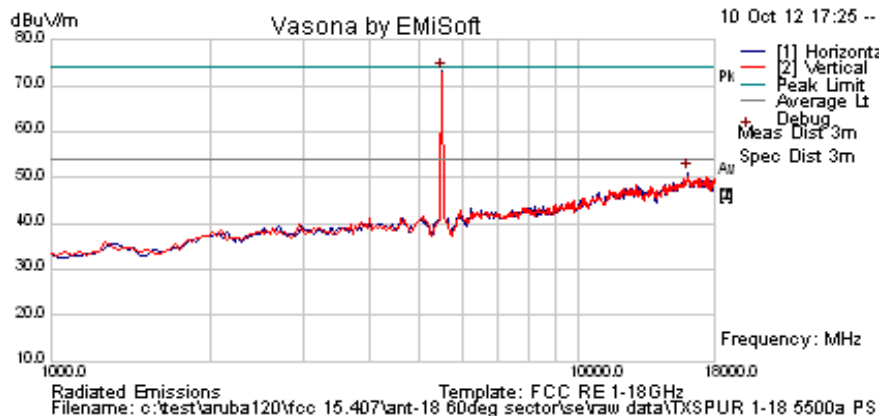

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5496.993988	78.1	4.6	-9.6	73.1	Peak [Scan]	H						FUND
16058.116	41.8	9.0	0.3	51.1	Peak [Scan]	H	200	0	54.0	-2.9	Pass	Noise


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 79 of 179

Test Freq.	5580 MHz	Engineer	JMH
Variant	802.11a; 6 Mbs	Temp (°C)	24
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	996
Antenna	ANT-18 Sector 60	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

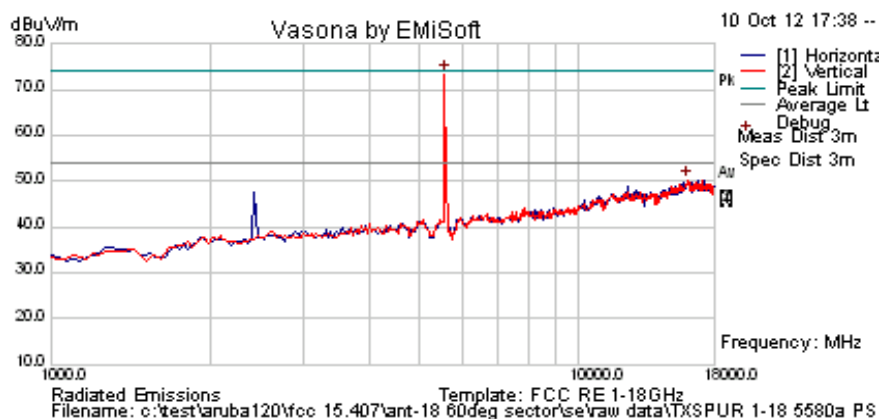

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5565.130261	78.5	4.7	-9.7	73.4	Peak [Scan]	V						FUND
16058.116	41.0	9.0	0.3	50.2	Peak [Scan]	V	100	0	54.0	-3.8	Pass	Noise


Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
	NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 80 of 179

Test Freq.	5700 MHz	Engineer	JMH
Variant	802.11a; 6 Mbs	Temp (°C)	24
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	996
Antenna	ANT-18 Sector 60	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

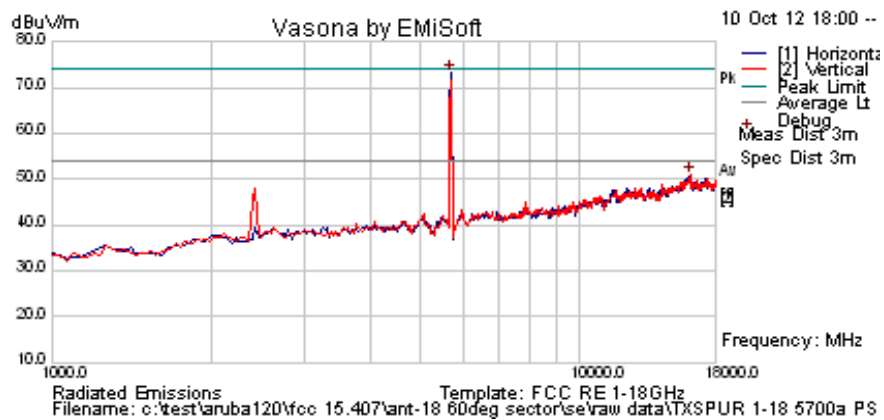

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5701.402806	78.1	4.7	-9.6	73.3	Peak [Scan]	H						FUND
16126.253	41.6	9.0	0.2	50.8	Peak [Scan]	V	150	0	54.0	-3.2	Pass	Noise

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 81 of 179

11a

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

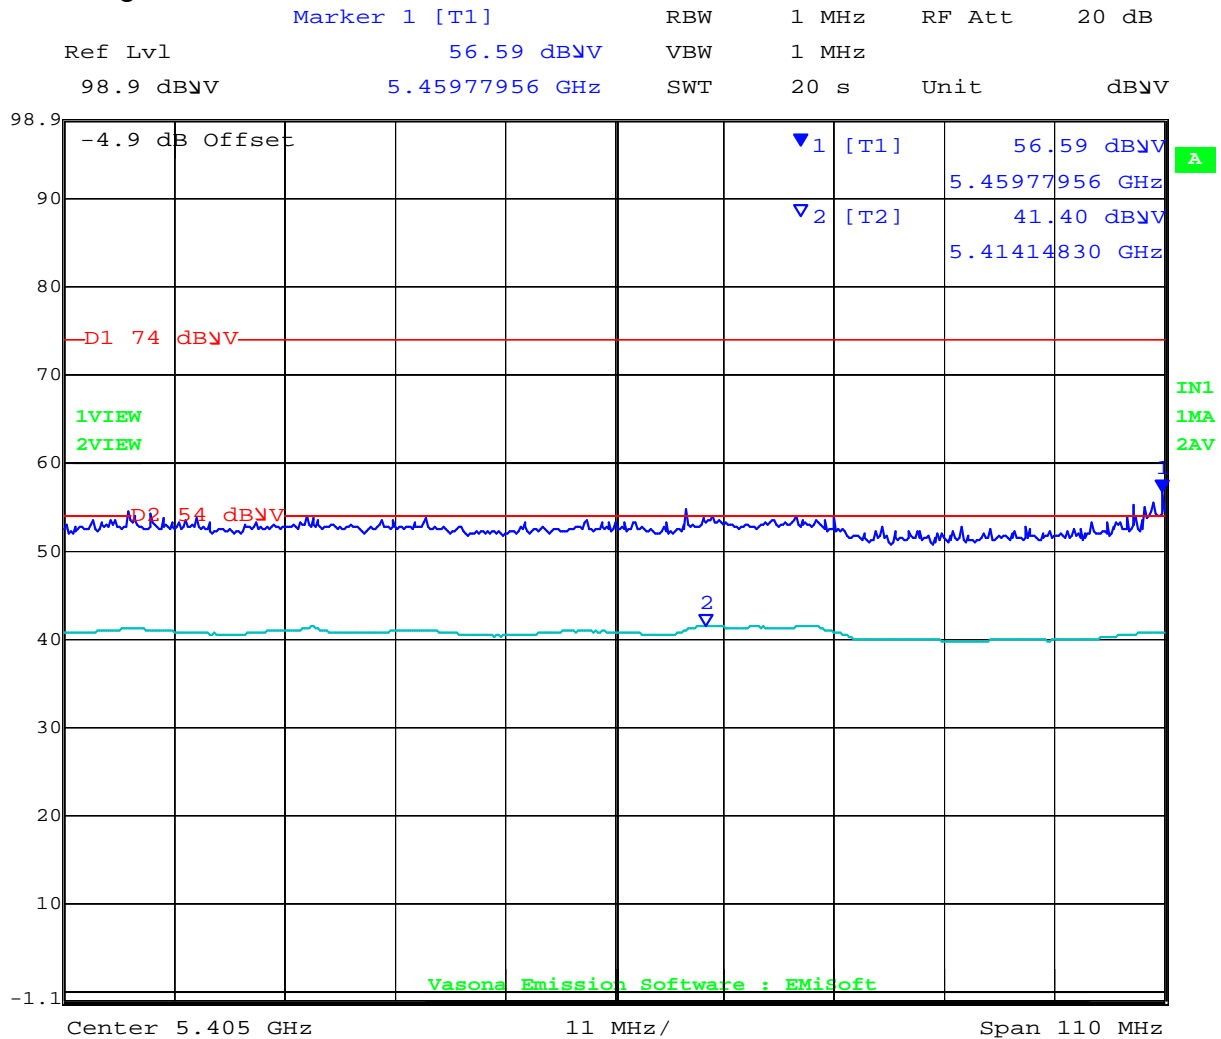

Date: 11.OCT.2012 08:35:12

NART = 18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 82 of 179

HT-20

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 57.70 dBV VBW 1 MHz
98.9 dBV 5.45955912 GHz SWT 20 s Unit dBV

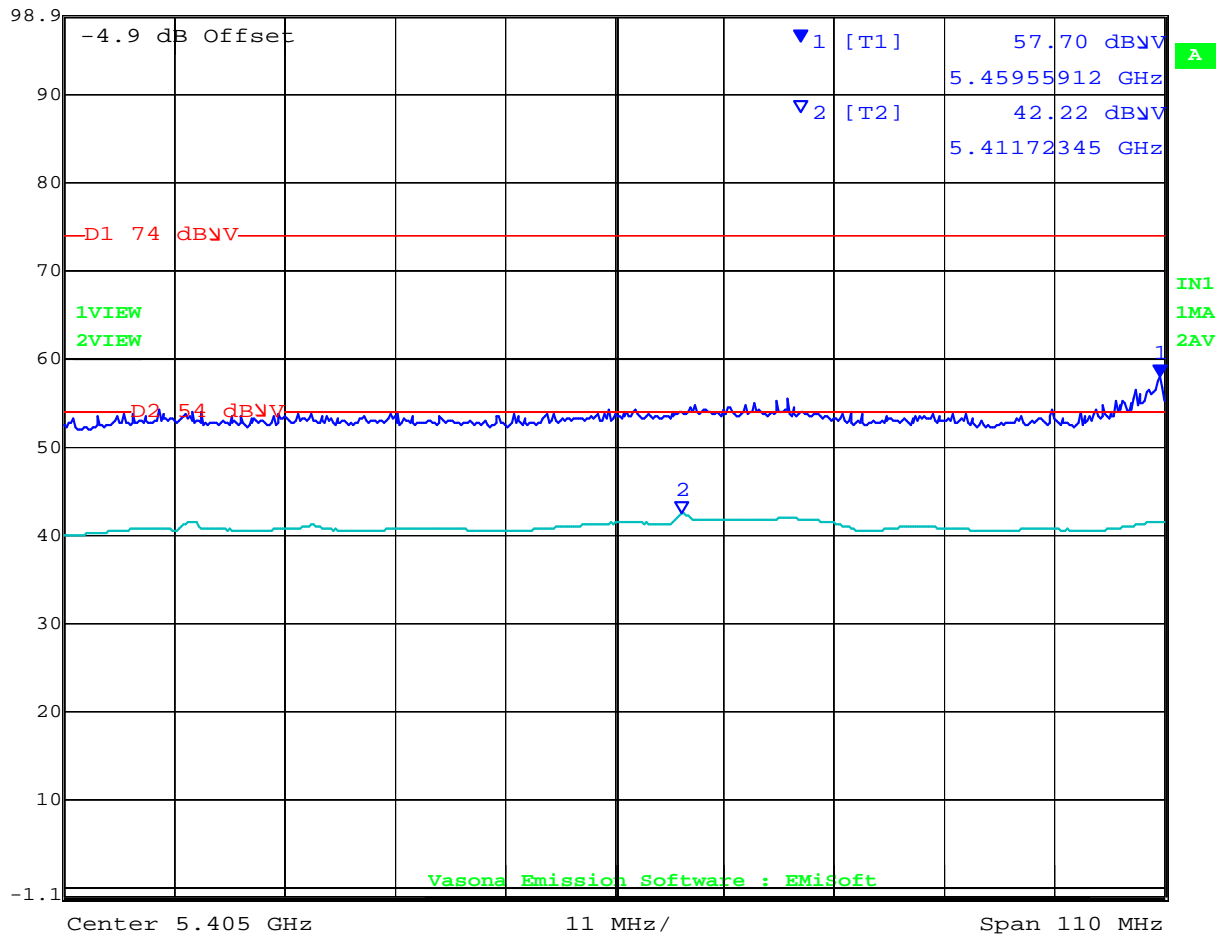

Date: 11.OCT.2012 08:27:00

NART = 18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 83 of 179

HT-40

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

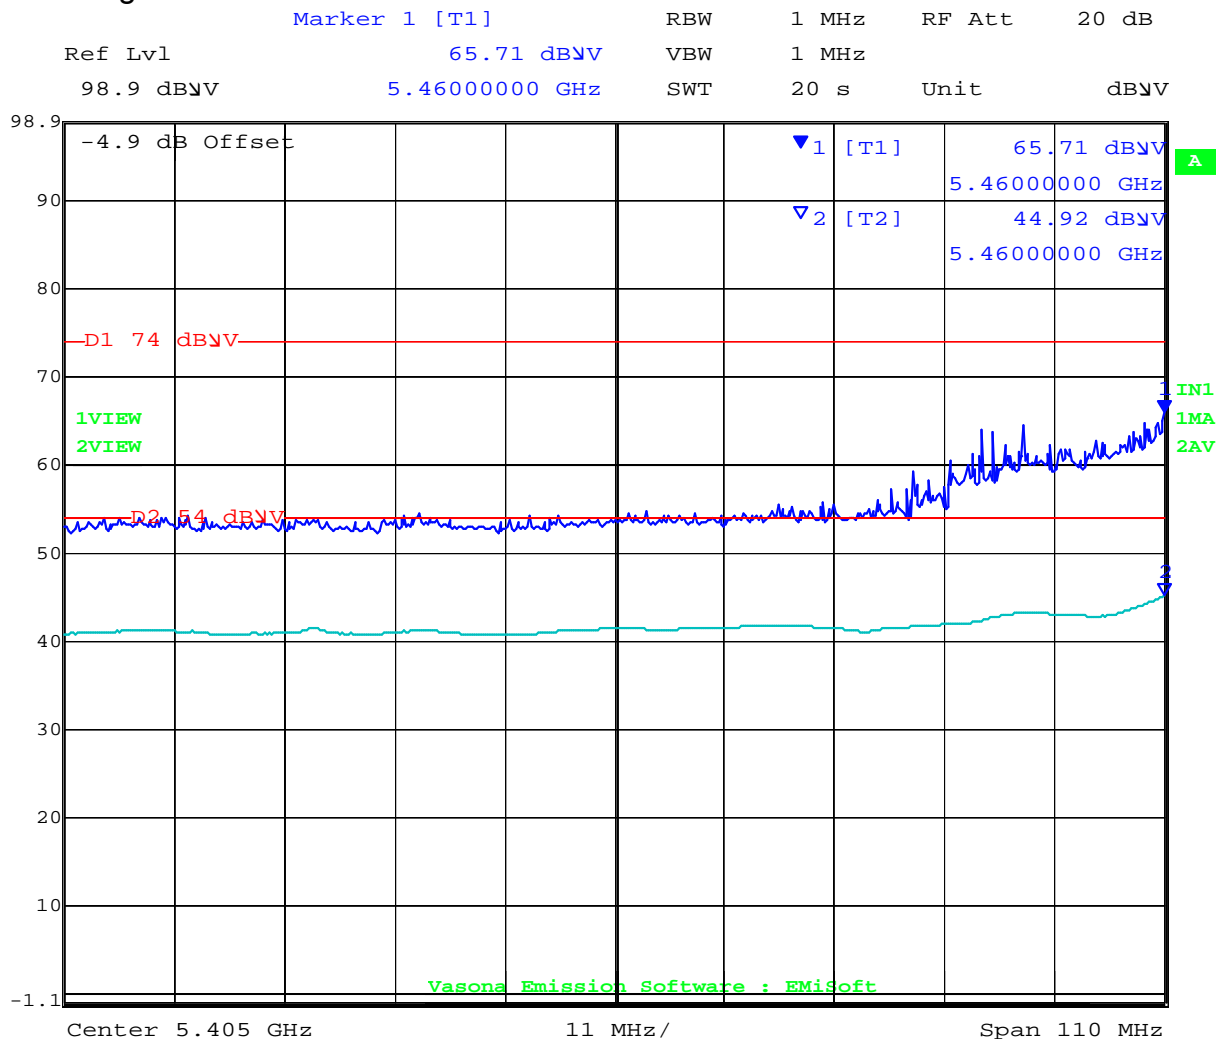

Date: 11.OCT.2012 08:16:05

NART = 18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 84 of 179

6.1.2.3. ANT-19 Monopole antenna

Low

Test Freq.	5260 MHz	Engineer	JMH
Variant	802.11a; 6 Mbs	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1002
Antenna	ANT-19 6 dBi Monopole	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

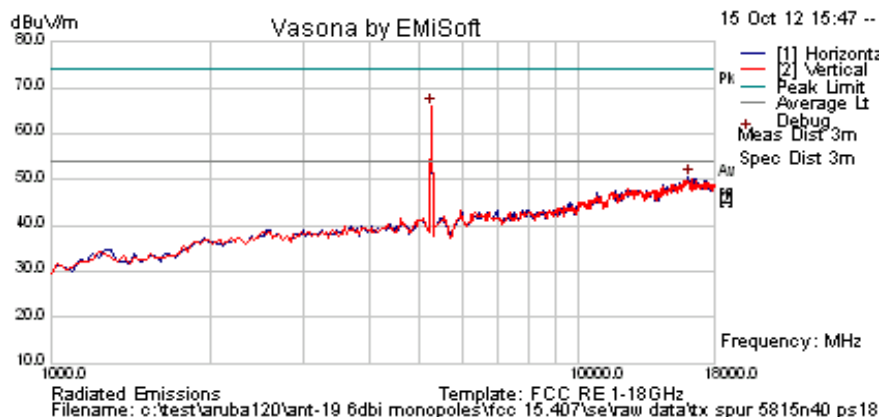

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5258.517	71.0	4.6	-9.7	65.8	Peak [Scan]	V						FUND
16092.184	41.2	9.0	0.3	50.5	Peak [Scan]	H	200	0	54.0	-3.5	Pass	Noise
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 85 of 179

Mid

Test Freq.	5300 MHz	Engineer	JMH
Variant	802.11a; 6 Mbs	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	ART = 18	Press. (mBars)	1002
Antenna	ANT-19 6 dBi Monopole	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

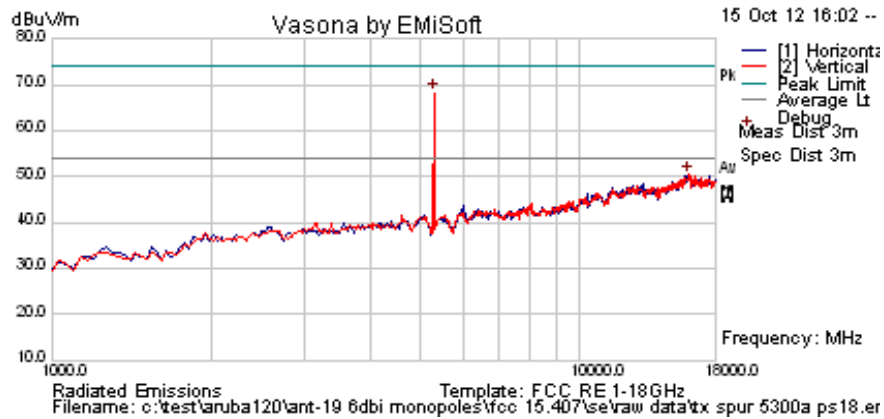

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5292.585	73.2	4.6	-9.6	68.2	Peak [Scan]	V						FUND
16024.048	41.1	9.0	0.2	50.4	Peak [Scan]	V	150	0	54.0	-3.7	Pass	Noise

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 86 of 179

High

Test Freq.	5320 MHz	Engineer	JMH
Variant	802.11a; 6 Mbs	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	ART = 18	Press. (mBars)	1002
Antenna	ANT-19 6 dBi Monopole	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

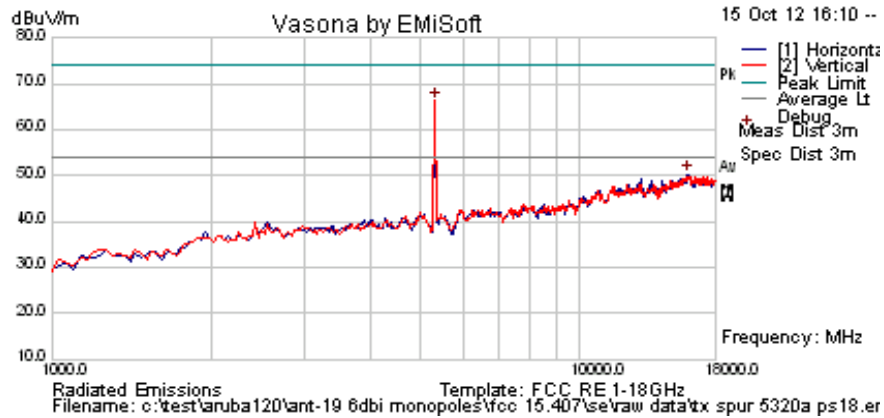

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5326.653	71.1	4.6	-9.5	66.2	Peak [Scan]	V						FUND
16024.048	40.9	9.0	0.2	50.2	Peak [Scan]	H	100	0	54.0	-3.8	Pass	Noise

Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
	NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 87 of 179

11a

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

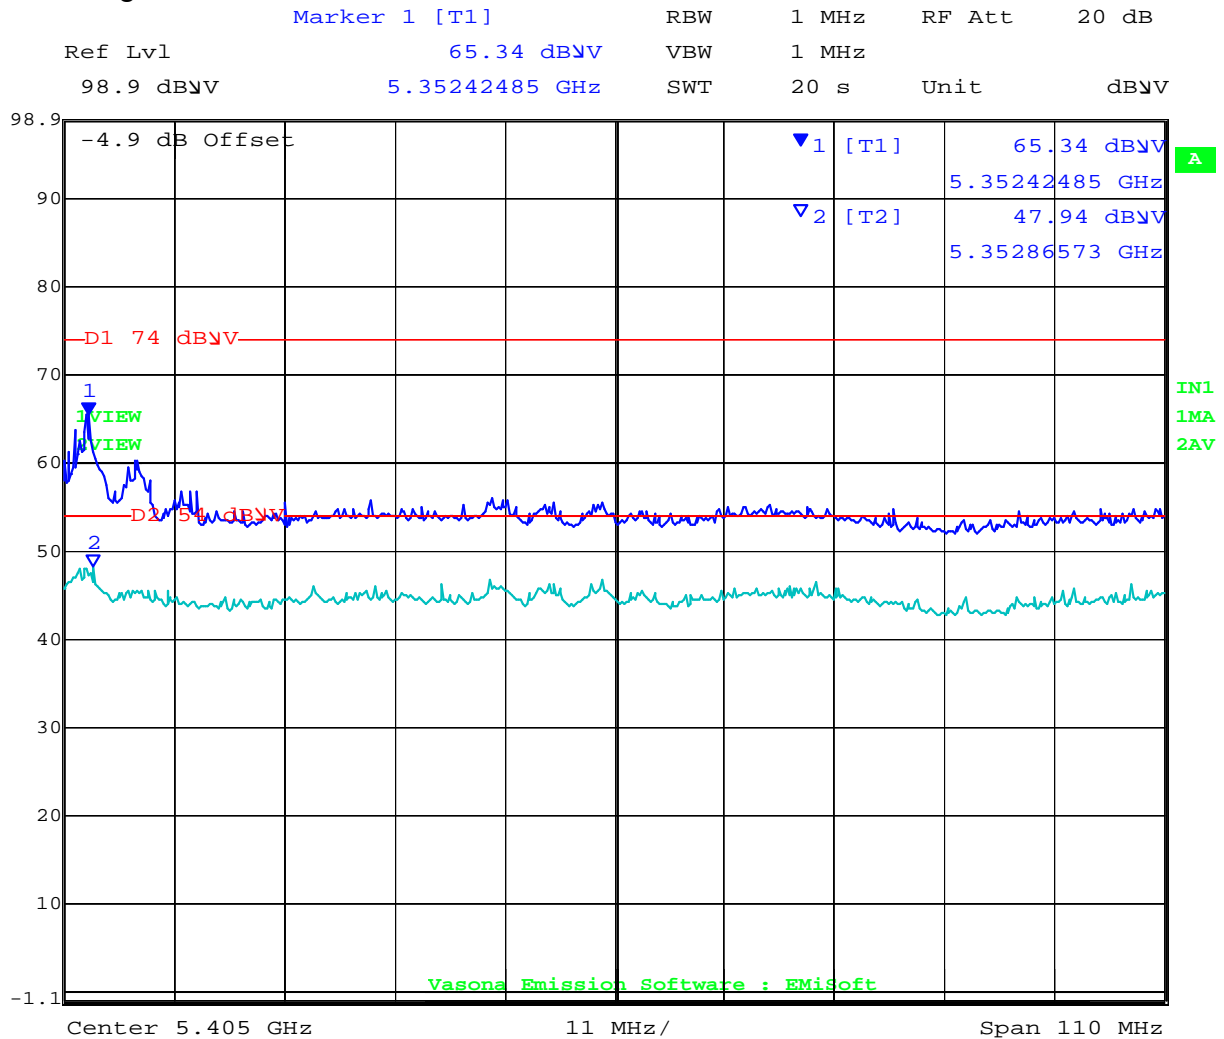

Date: 15.OCT.2012 19:40:52

NART = 18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 88 of 179

HT-20

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
Ref Lvl	64.50 dBμV	VBW	1 MHz		
98.9 dBμV	5.35440882 GHz	SWT	20 s	Unit	dBμV

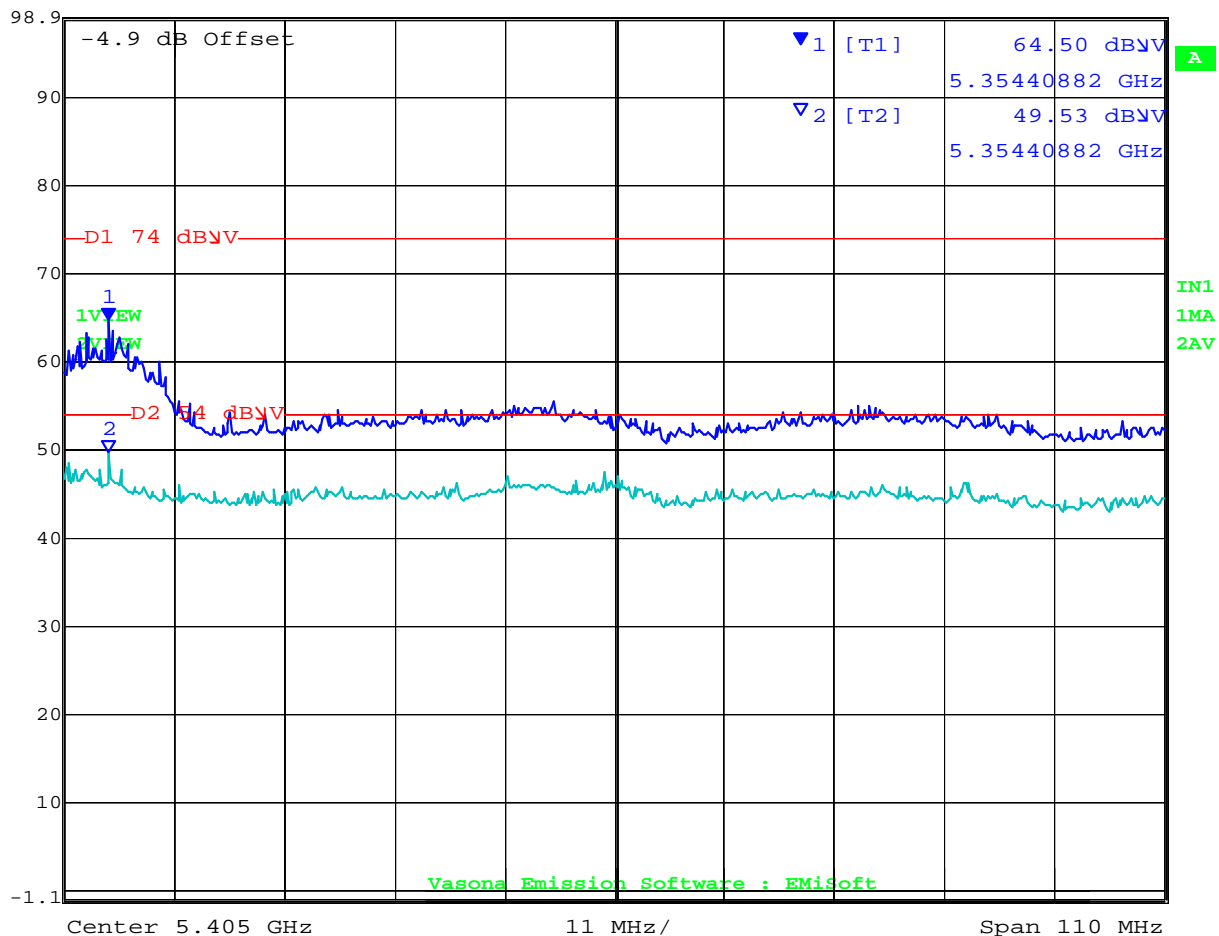

Date: 15.OCT.2012 19:48:36

NART = 18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 89 of 179

HT-40

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement



Date: 15.OCT.2012 19:52:20

NART = 18


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 90 of 179

Low

Test Freq.	5500 MHz	Engineer	JMH
Variant	802.11a; 6 Mbs	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1002
Antenna	ANT-19 6 dBi Monopole	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

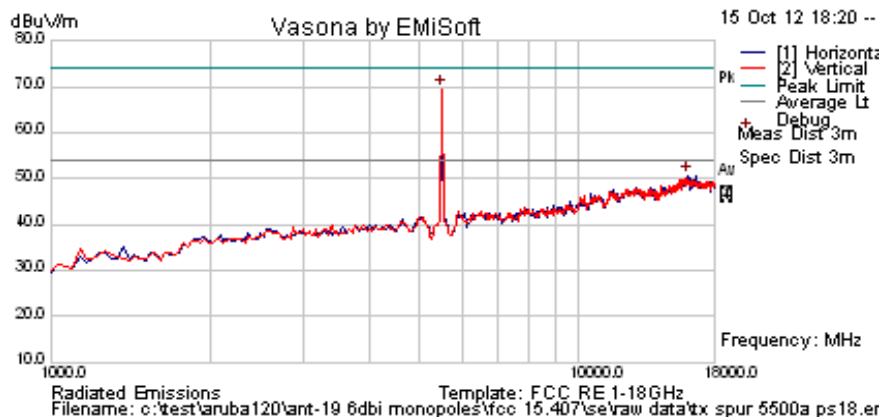

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5496.993988	74.6	4.6	-9.6	69.6	Peak [Scan]	V						FUND
16024.048	41.4	9.0	0.2	50.7	Peak [Scan]	H	100	0	54.0	-3.3	Pass	Noise

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 91 of 179

Mid

Test Freq.	5580 MHz	Engineer	JMH
Variant	802.11a; 6 Mbs	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1002
Antenna	ANT-19 6 dBi Monopole	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

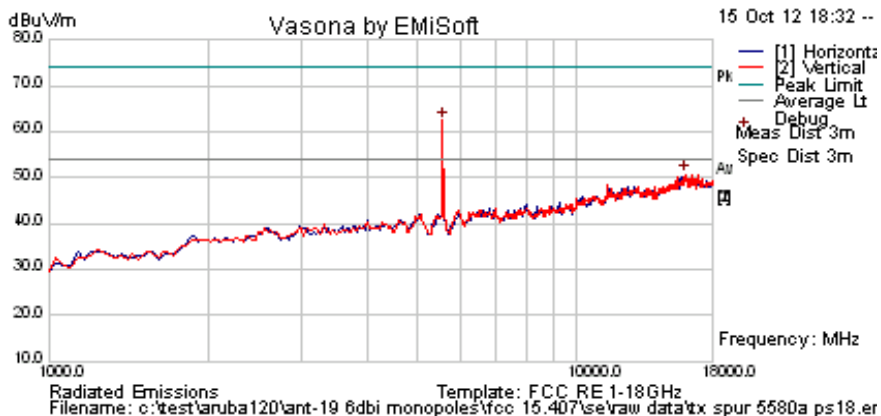

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5565.130261	67.6	4.7	-9.7	62.5	Peak [Scan]	V						FUND
15989.98	41.5	9.0	0.1	50.7	Peak [Scan]	H	200	0	54.0	-3.3	Pass	Noise

Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
	NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 92 of 179

High

Test Freq.	5700 MHz	Engineer	JMH
Variant	802.11a; 6 Mbs	Temp (°C)	25
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1002
Antenna	ANT-19 6 dBi Monopole	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

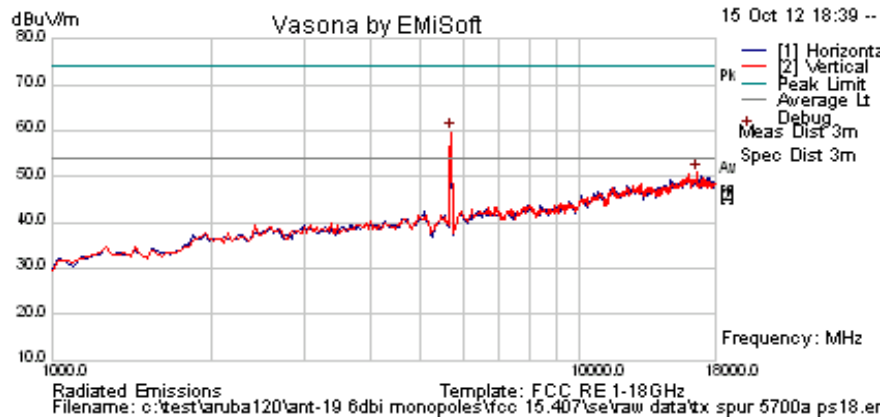

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5701.402806	64.5	4.7	-9.6	59.7	Peak [Scan]	V						FUND
16637.275	41.6	8.7	0.6	51.0	Peak [Scan]	V	100	0	54.0	-3.0	Pass	Noise

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 93 of 179

11a

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

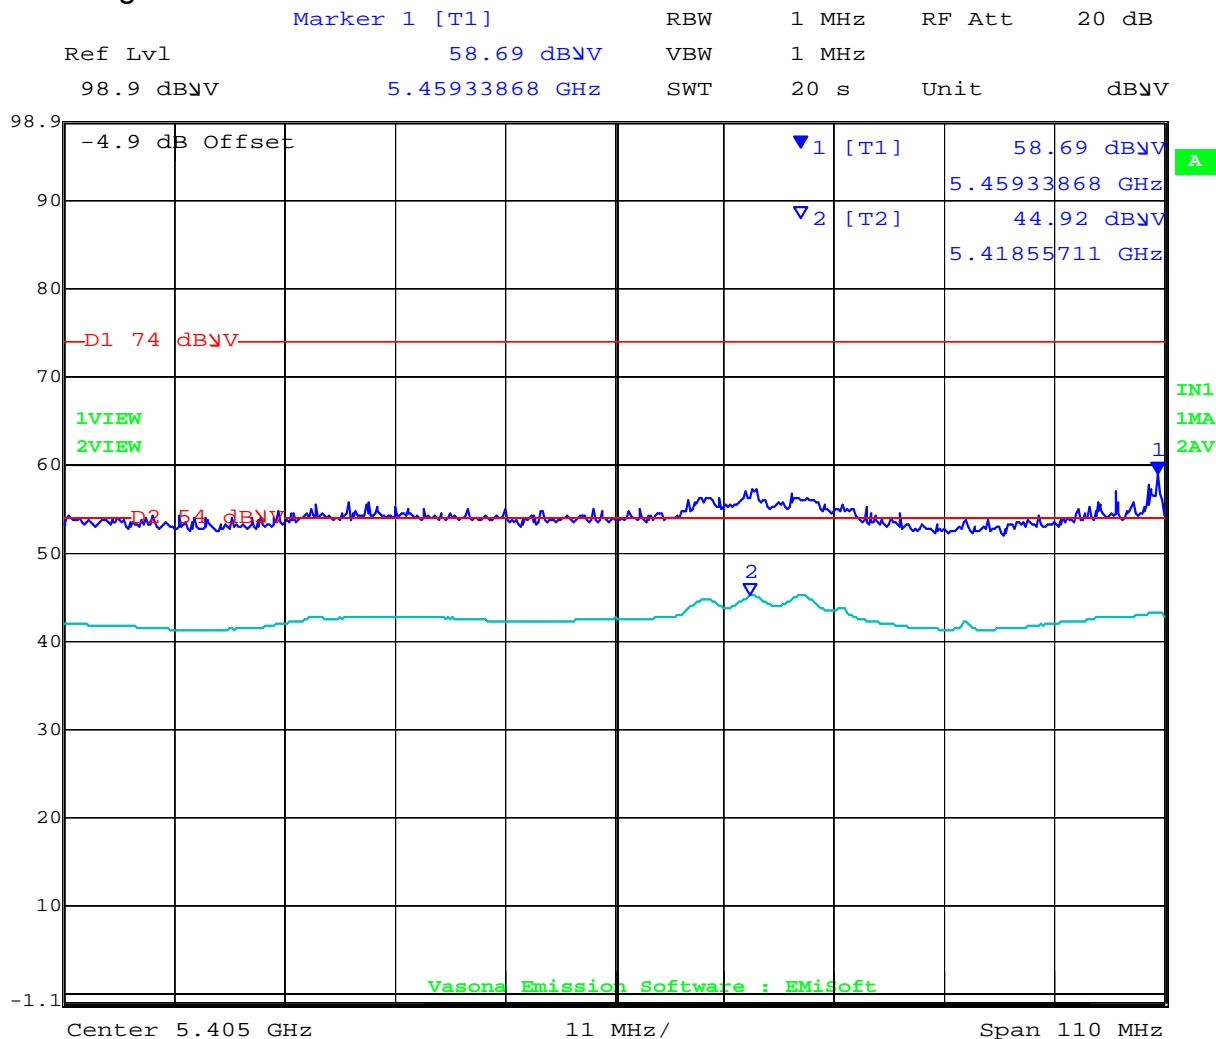

Date: 15.OCT.2012 19:32:23

NART = 18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 94 of 179

HT-20

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement

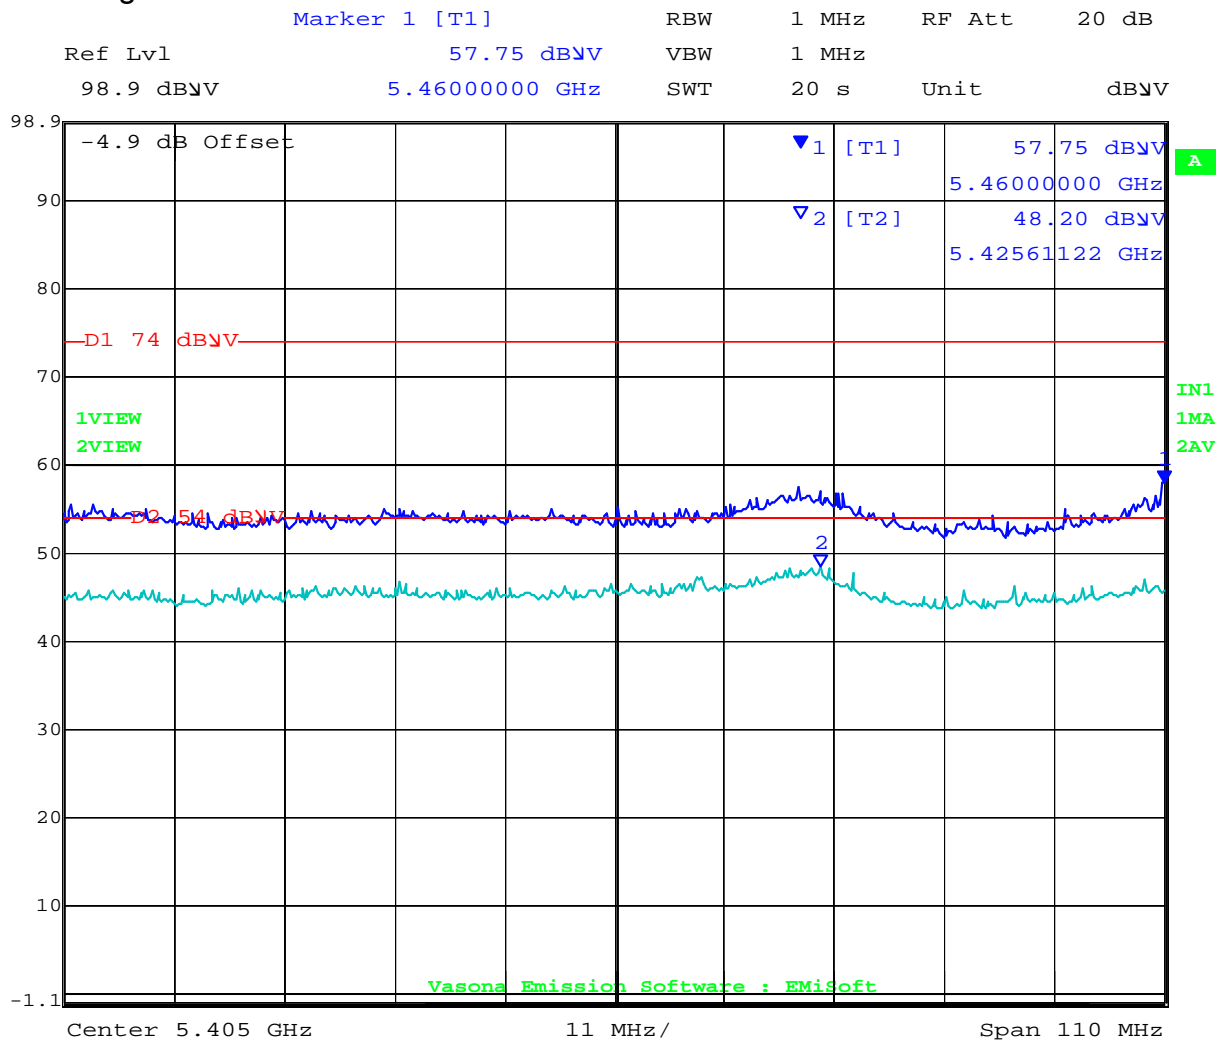

Date: 15.OCT.2012 19:26:47

NART = 18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 95 of 179

HT-40

Restricted Bands of Operation – FCC Part 15.205 – 5.35-5.46 GHz

Band Edge Measurement



Date: 15.OCT.2012 19:22:42

NART = 18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 96 of 179

6.1.2.4. Digital Emissions (30M-1 GHz)

FCC, Part 15 Subpart C §15.205/ §15.209
Industry Canada RSS-210 §2.2

Test Procedure

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

The EUT had two methods of powering on ac/dc converter and Power over Ethernet (POE). Both modes were tested for emissions below 1GHz.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength
R = Measured Receiver Input Amplitude
AF = Antenna Factor
CORR = Correction Factor = CL – AG + NFL
CL = Cable Loss
AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$


$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 97 of 179

Test Freq.	5320 MHz	Engineer	JMH
Variant	Digital Emissions	Temp (°C)	26
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	33
Power Setting	18	Press. (mBars)	1000
Antenna	6 dBi Monopole		
Test Notes 1	unshielded ethernet and no console cable		
Test Notes 2			

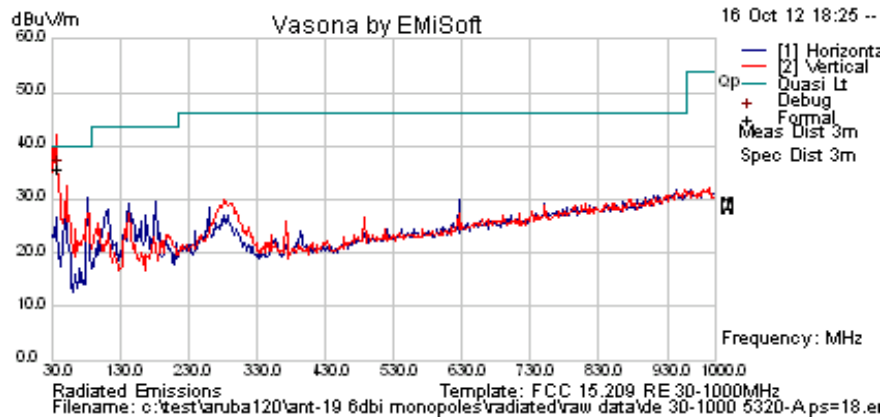

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	PoI	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
38.565	48.6	3.6	-16.4	35.8	Quasi Peak	V	114	136	40	-4.2	Pass	
Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification

Limits

§15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

§15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

§15.209 (a) and RSS-Gen §2.2 Limit Matrix

Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 99 of 179

6.1.3. AC Wireline Conducted Emissions (150 kHz – 30 MHz)

FCC, Part 15 Subpart C §15.207
Industry Canada RSS-Gen §7.2.2

Test Procedure

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

Not required - EUT is supplied as POE only.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification

Limit

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu\Omega$ line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

RSS-Gen §7.2.2

The radio frequency voltage that is conducted back into the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The tighter limit applies at the frequency range boundaries.

§15.207 (a) and RSS-Gen §7.2.2 Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	± 2.64 dB
-------------------------	---------------


Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'	0158, 0184, 0287, 0190, 0293, 0307

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


7. PHOTOGRAPHS

7.1. Test Setup - Digital Emissions below 1 GHz

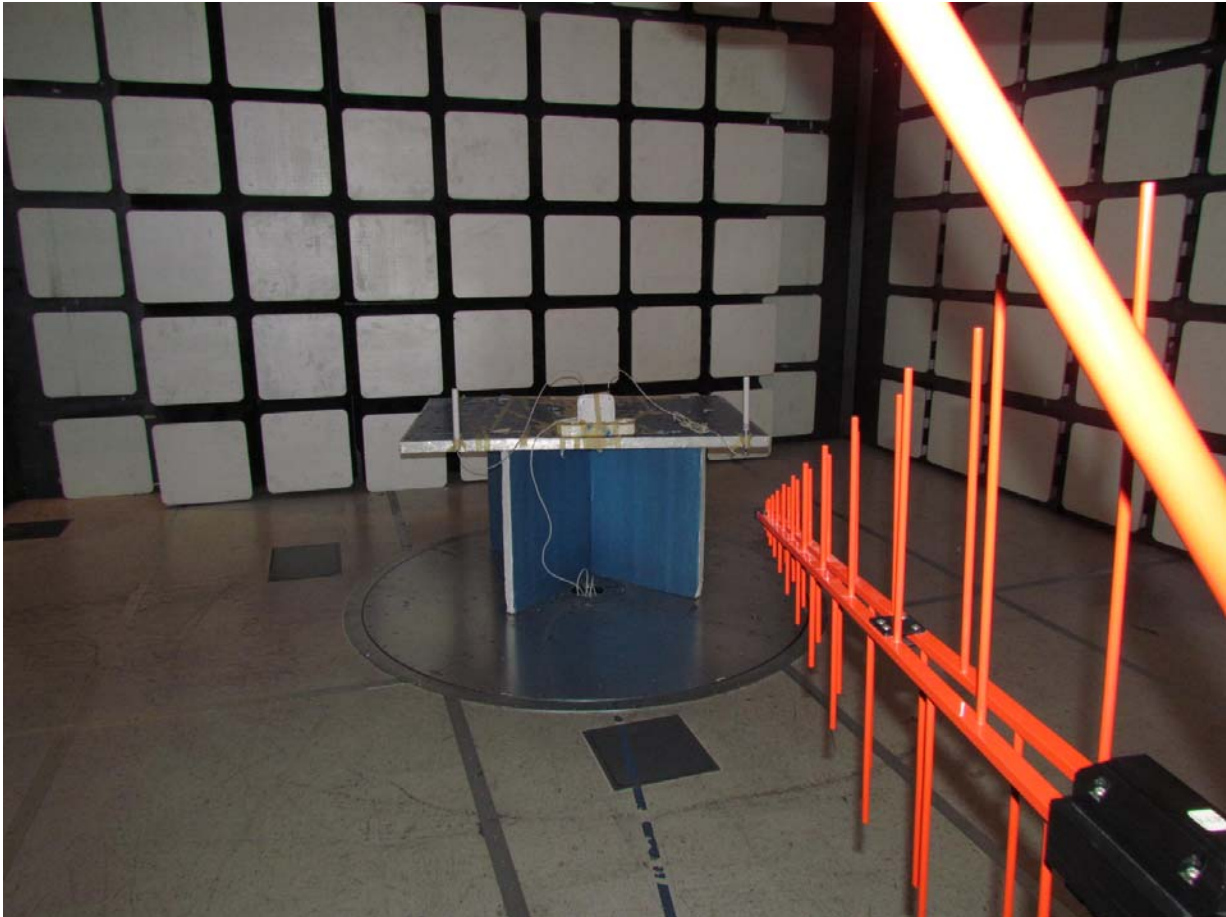

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

7.2. Radiated Emissions Test Setup >1 GHz – ANT-19

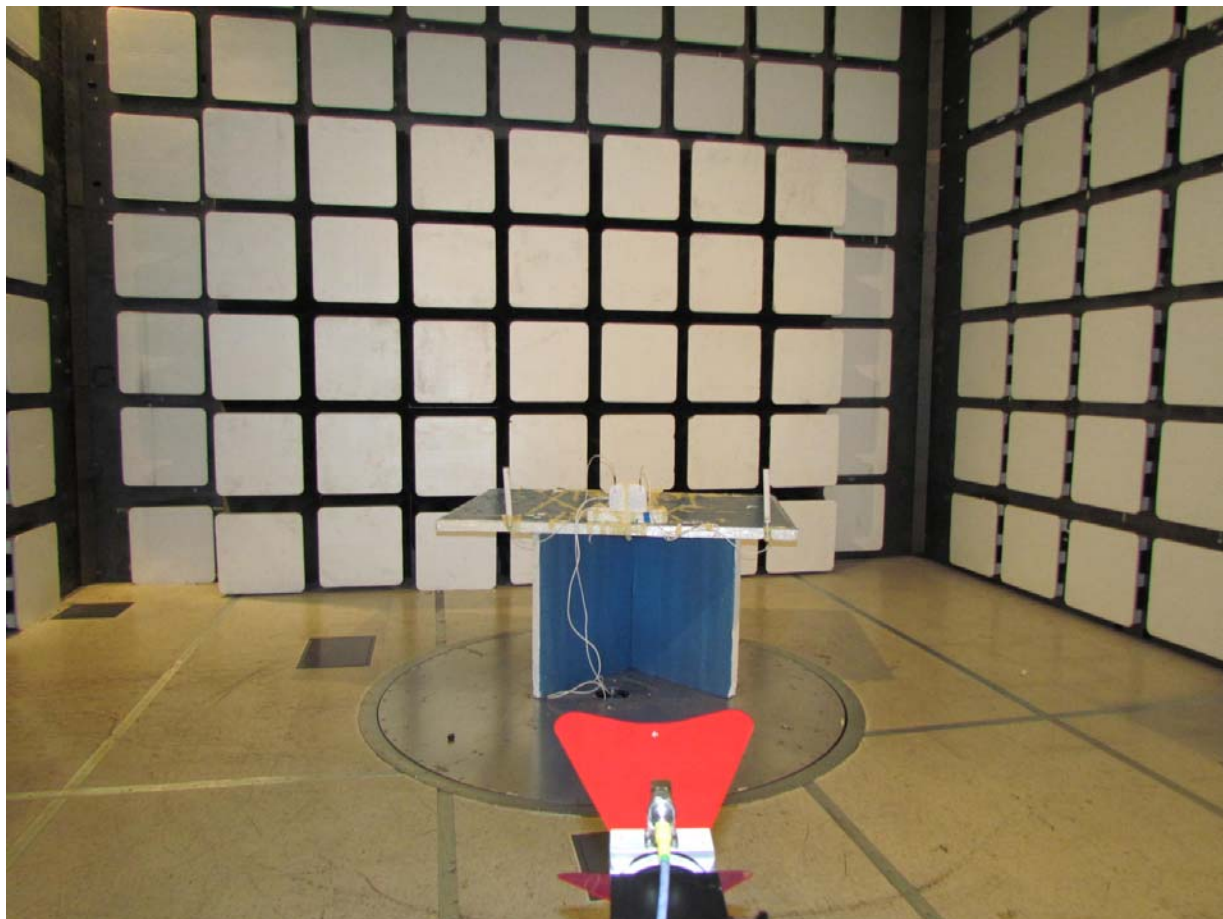



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 103 of 179

8. TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Serial #	Calibration Due Date
0070	Power Meter	Hewlett Packard	437B	3125U11552	28 th Nov 13
0117	Power Sensor	Hewlett Packard	8487D	3318A00371	15 th Nov 13
0223	Power Meter	Hewlett Packard	EPM-442A	US37480256	15 th Nov 13
0374	Power Sensor	Hewlett Packard	8485A	3318A19694	29 th Nov 13
0158	Barometer /Thermometer	Control Co.	4196	E2846	8 th Dec 13
0193	EMI Receiver	Rhode & Schwartz	ESI 7	838496/007	2 nd Dec 13
0287	EMI Receiver	Rhode & Schwartz	ESIB40	100201	16 th Nov 13
0338	30 - 3000 MHz Antenna	Sunol	JB3	A052907	8 th Nov 13
0335	1-18 GHz Horn Antenna	EMCO	3117	00066580	7 th Nov 13
0252	SMA Cable	Megaphase	Sucoflex 104	None	N/A
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001	N/A
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002	N/A
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001	N/A
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	209092-001	N/A
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623	N/A
	EMC Test Software	EMISoft	Vasona	5.0051	N/A
	RF Conducted Test Software	National Instruments	Labview	Version 8.2	N/A
	RF Conducted Test Software	MiCOM Labs ATS		Version 1.5	N/A

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 104 of 179

APPENDIX

A. SUPPORTING INFORMATION

A.1. CONDUCTED TEST PLOTS

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




A.1.1. 26 dB & 99% Bandwidth



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5260.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

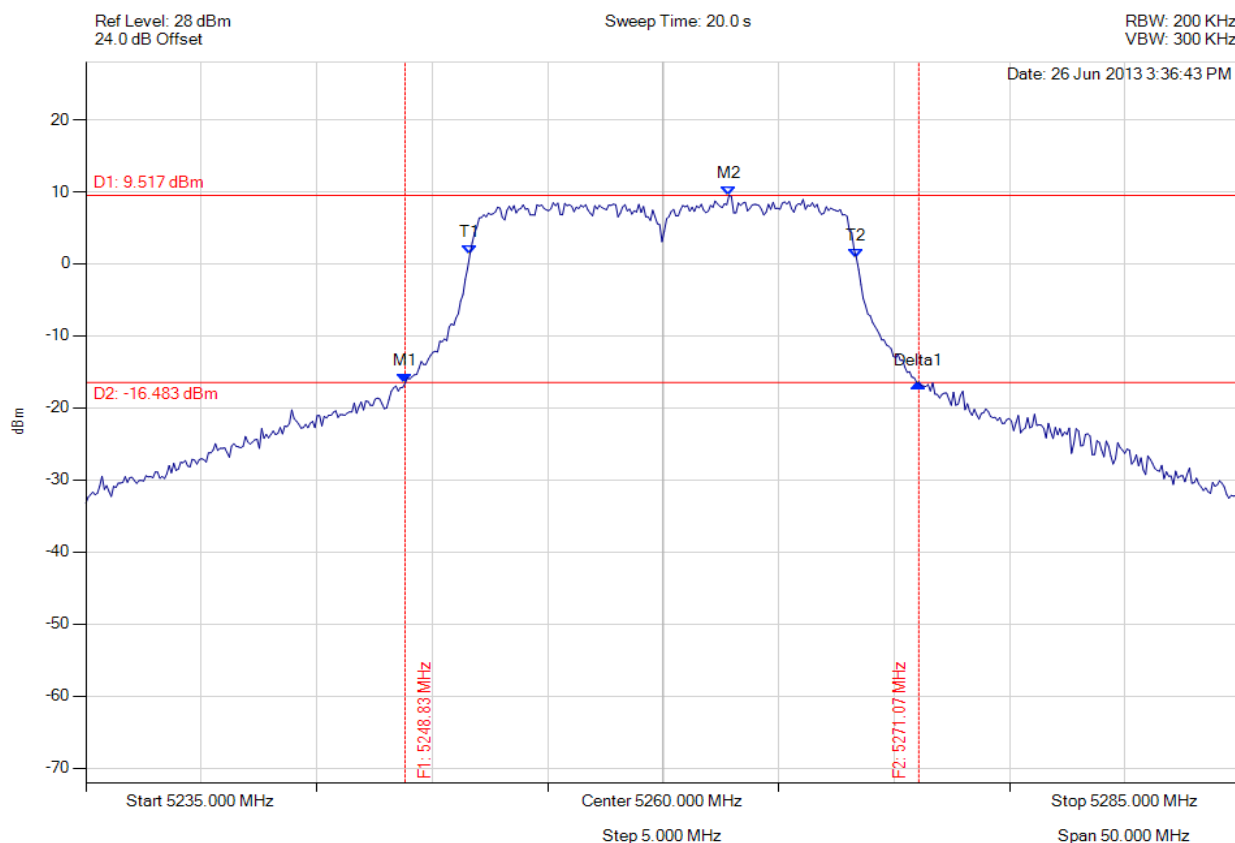

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5248.828 MHz : -16.582 dBm M2 : 5262.856 MHz : 9.517 dBm Delta1 : 22.244 MHz : 0.055 dB T1 : 5251.633 MHz : 1.352 dBm T2 : 5268.367 MHz : 0.852 dBm OBW : 16.733 MHz	Measured 26 dB Bandwidth: 22.244 MHz Measured 99% Bandwidth: 16.733 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 106 of 179



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5260.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

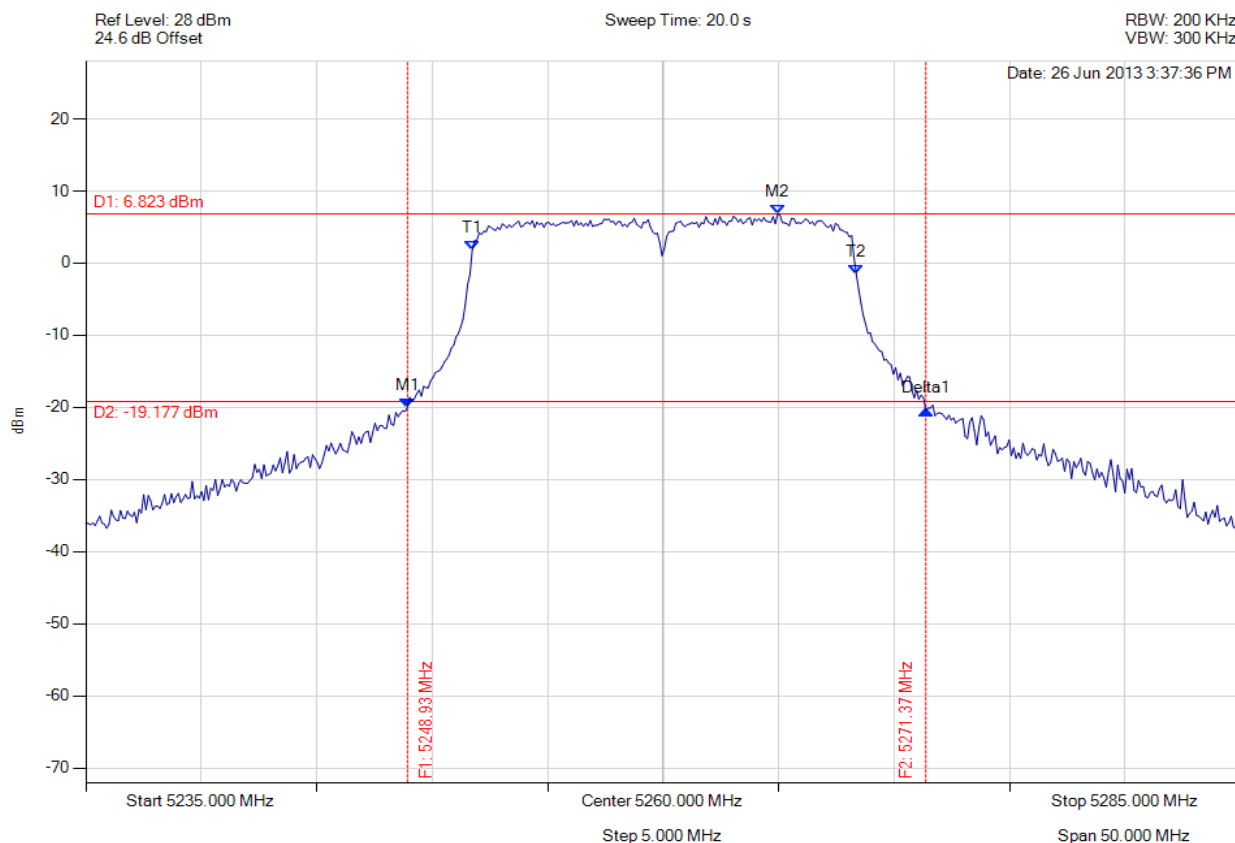

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5248.928 MHz : -19.980 dBm M2 : 5264.960 MHz : 6.823 dBm Delta1 : 22.445 MHz : -0.456 dB T1 : 5251.733 MHz : 1.763 dBm T2 : 5268.367 MHz : -1.613 dBm OBW : 16.633 MHz	Measured 26 dB Bandwidth: 22.445 MHz Measured 99% Bandwidth: 16.633 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5300.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

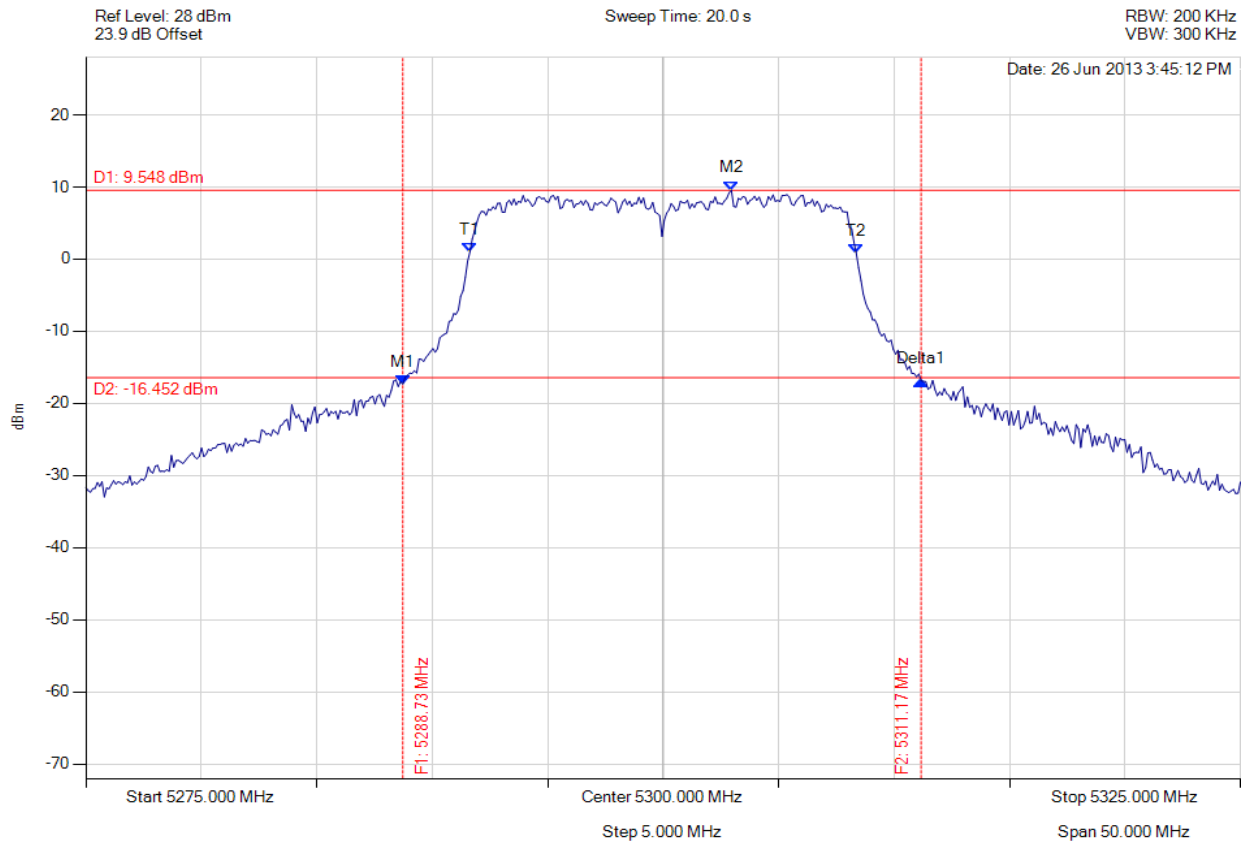

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5288.727 MHz : -17.316 dBm M2 : 5302.956 MHz : 9.548 dBm Delta1 : 22.445 MHz : 0.433 dB T1 : 5291.633 MHz : 1.012 dBm T2 : 5308.367 MHz : 0.744 dBm OBW : 16.733 MHz	Measured 26 dB Bandwidth: 22.445 MHz Measured 99% Bandwidth: 16.733 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5300.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

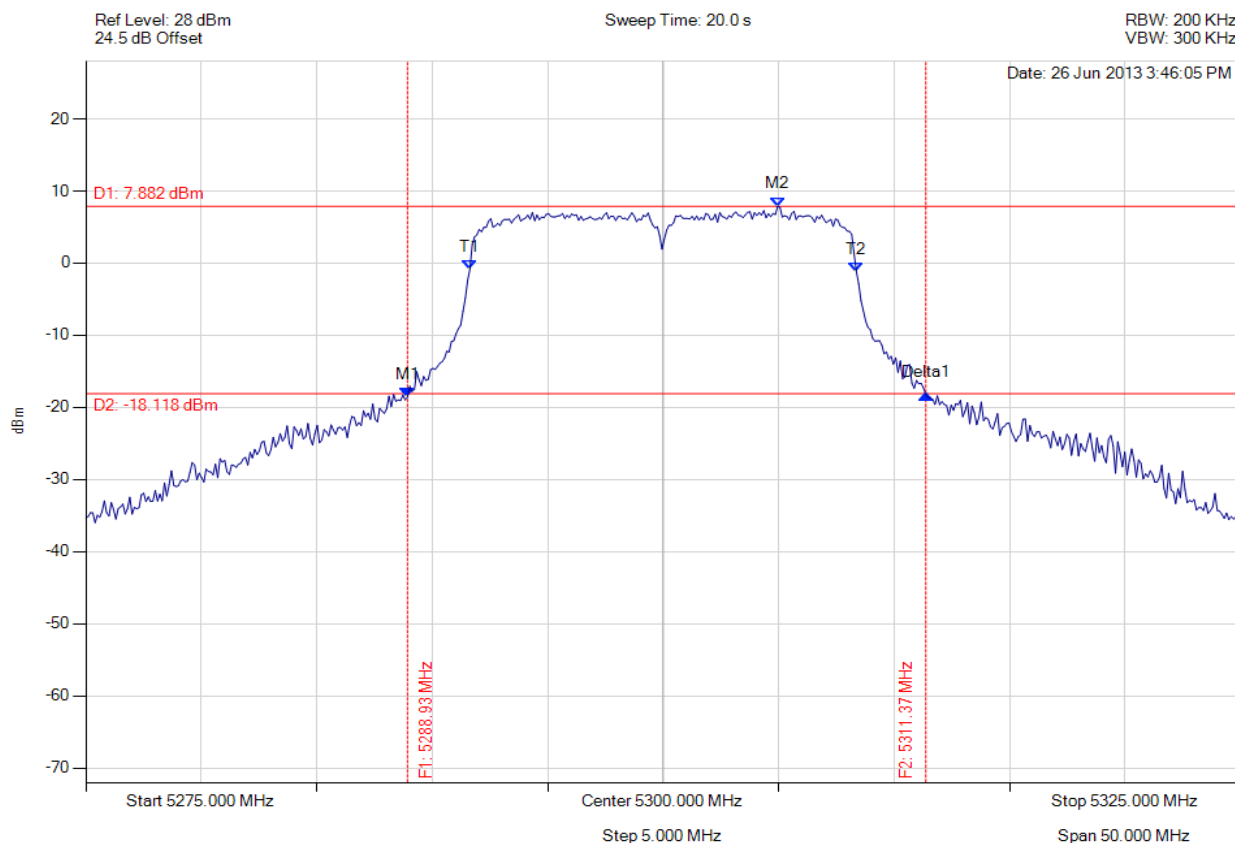

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5288.928 MHz : -18.567 dBm M2 : 5304.960 MHz : 7.882 dBm Delta1 : 22.445 MHz : 0.340 dB T1 : 5291.633 MHz : -0.798 dBm T2 : 5308.367 MHz : -1.146 dBm OBW : 16.733 MHz	Measured 26 dB Bandwidth: 22.445 MHz Measured 99% Bandwidth: 16.733 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5320.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

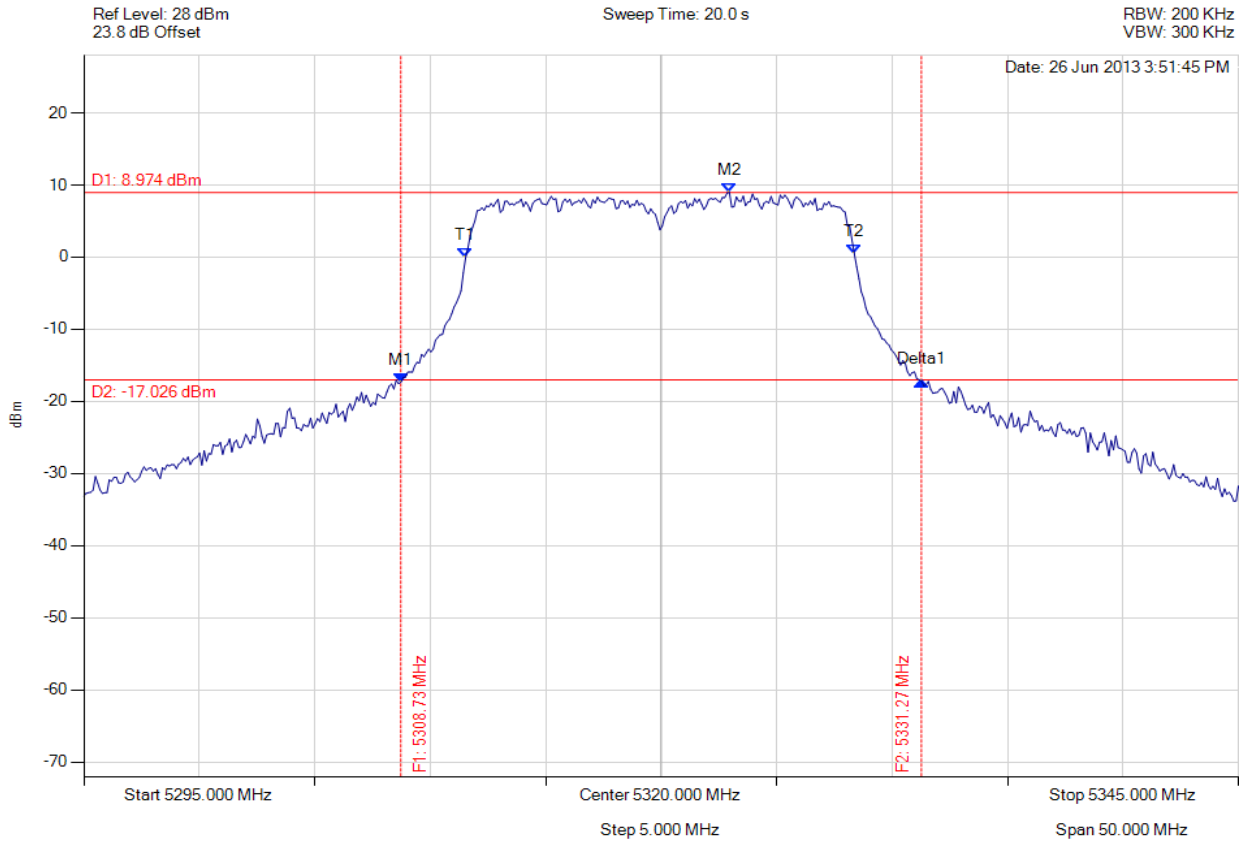

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5308.727 MHz : -17.351 dBm M2 : 5322.956 MHz : 8.974 dBm Delta1 : 22.545 MHz : 0.195 dB T1 : 5311.533 MHz : -0.112 dBm T2 : 5328.367 MHz : 0.459 dBm OBW : 16.834 MHz	Measured 26 dB Bandwidth: 22.545 MHz Measured 99% Bandwidth: 16.834 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5320.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

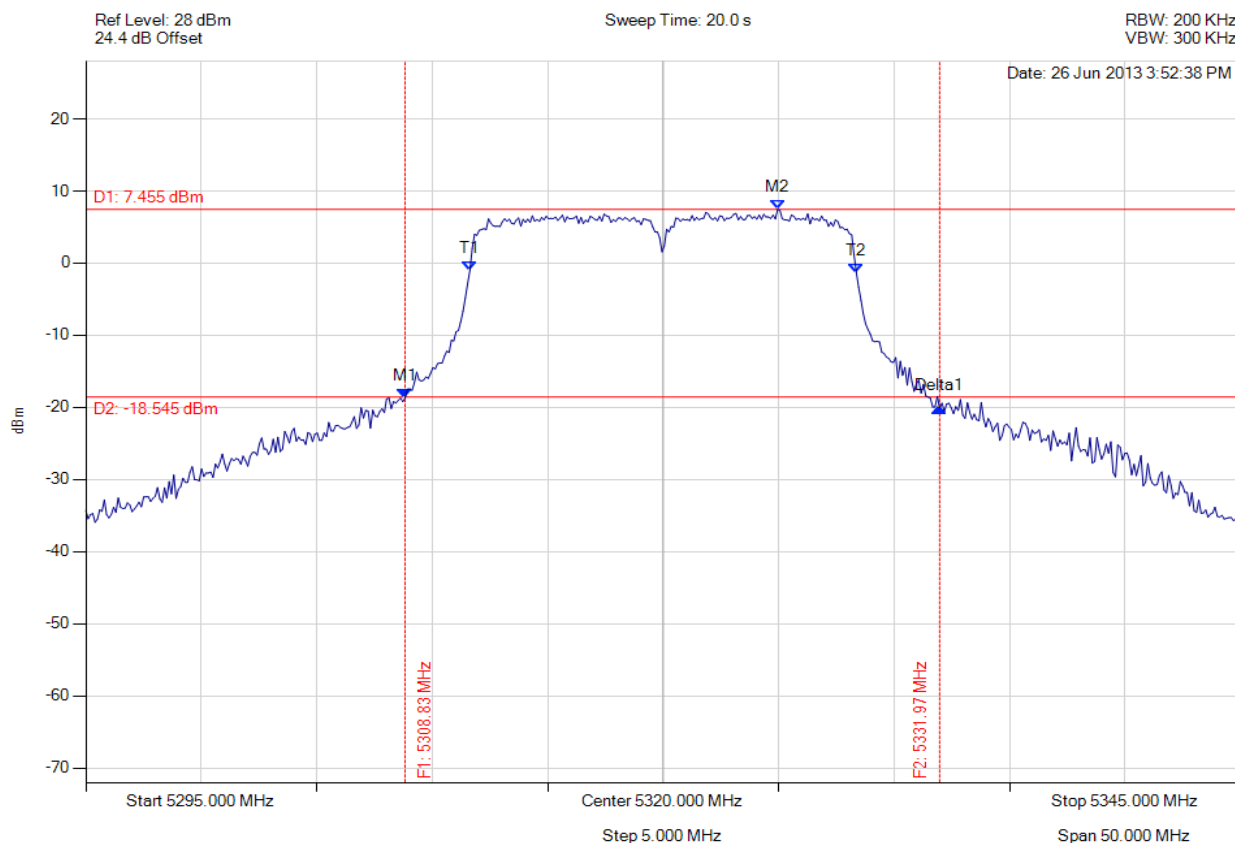

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5308.828 MHz : -18.707 dBm M2 : 5324.960 MHz : 7.455 dBm Delta1 : 23.146 MHz : -1.403 dB T1 : 5311.633 MHz : -0.985 dBm T2 : 5328.367 MHz : -1.308 dBm OBW : 16.733 MHz	Measured 26 dB Bandwidth: 23.146 MHz Measured 99% Bandwidth: 16.733 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 111 of 179



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

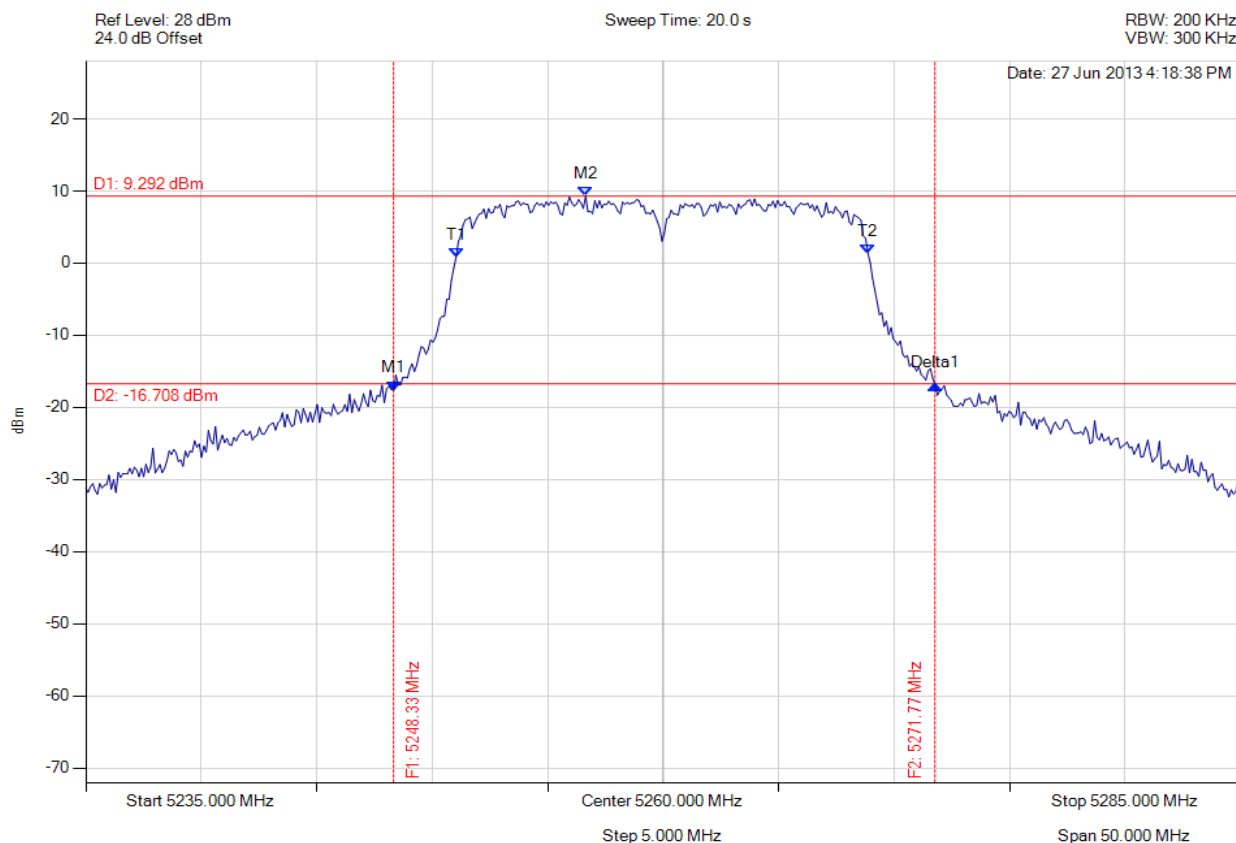

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5248.327 MHz : -17.629 dBm M2 : 5256.643 MHz : 9.292 dBm Delta1 : 23.447 MHz : 0.801 dB T1 : 5251.032 MHz : 0.799 dBm T2 : 5268.868 MHz : 1.356 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 23.447 MHz Measured 99% Bandwidth: 17.836 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

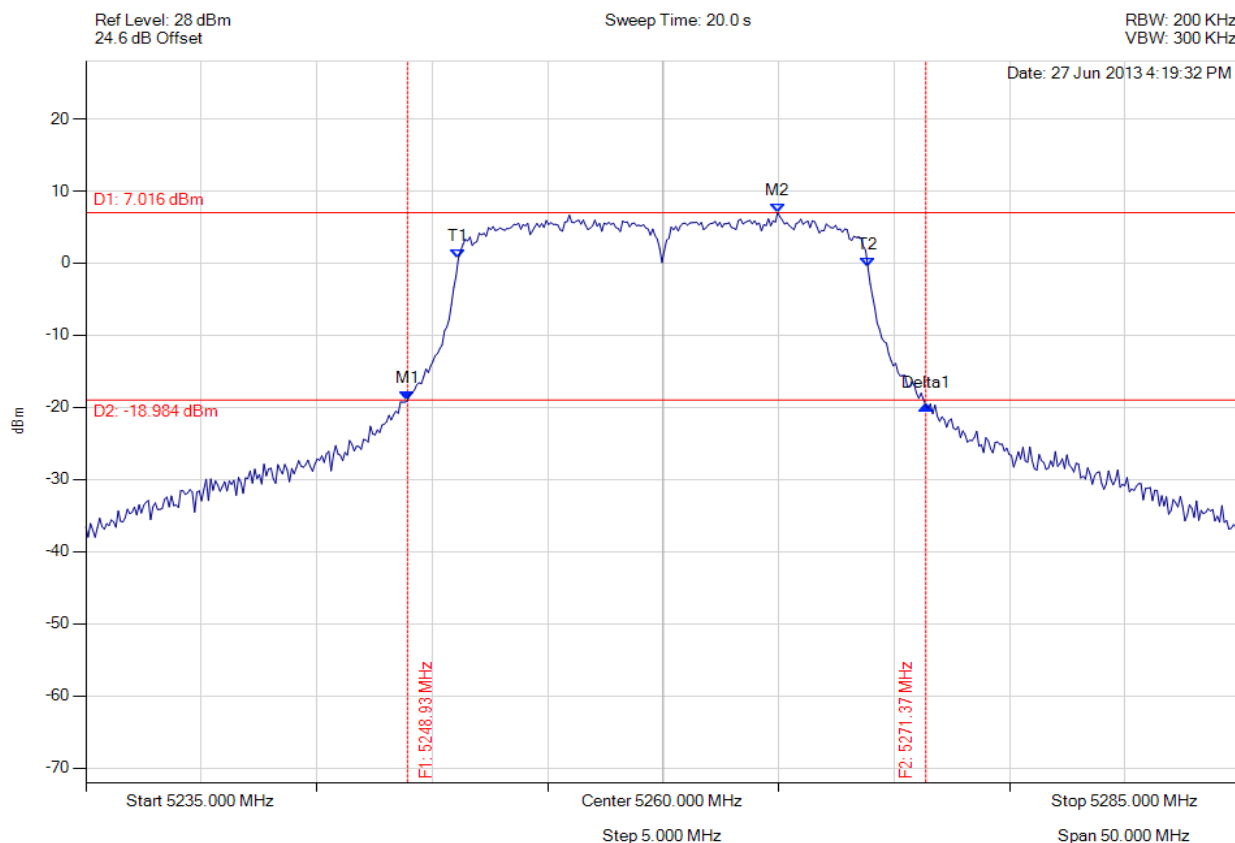

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5248.928 MHz : -19.053 dBm M2 : 5264.960 MHz : 7.016 dBm Delta1 : 22.445 MHz : -0.728 dB T1 : 5251.132 MHz : 0.675 dBm T2 : 5268.868 MHz : -0.572 dBm OBW : 17.735 MHz	Measured 26 dB Bandwidth: 22.445 MHz Measured 99% Bandwidth: 17.735 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

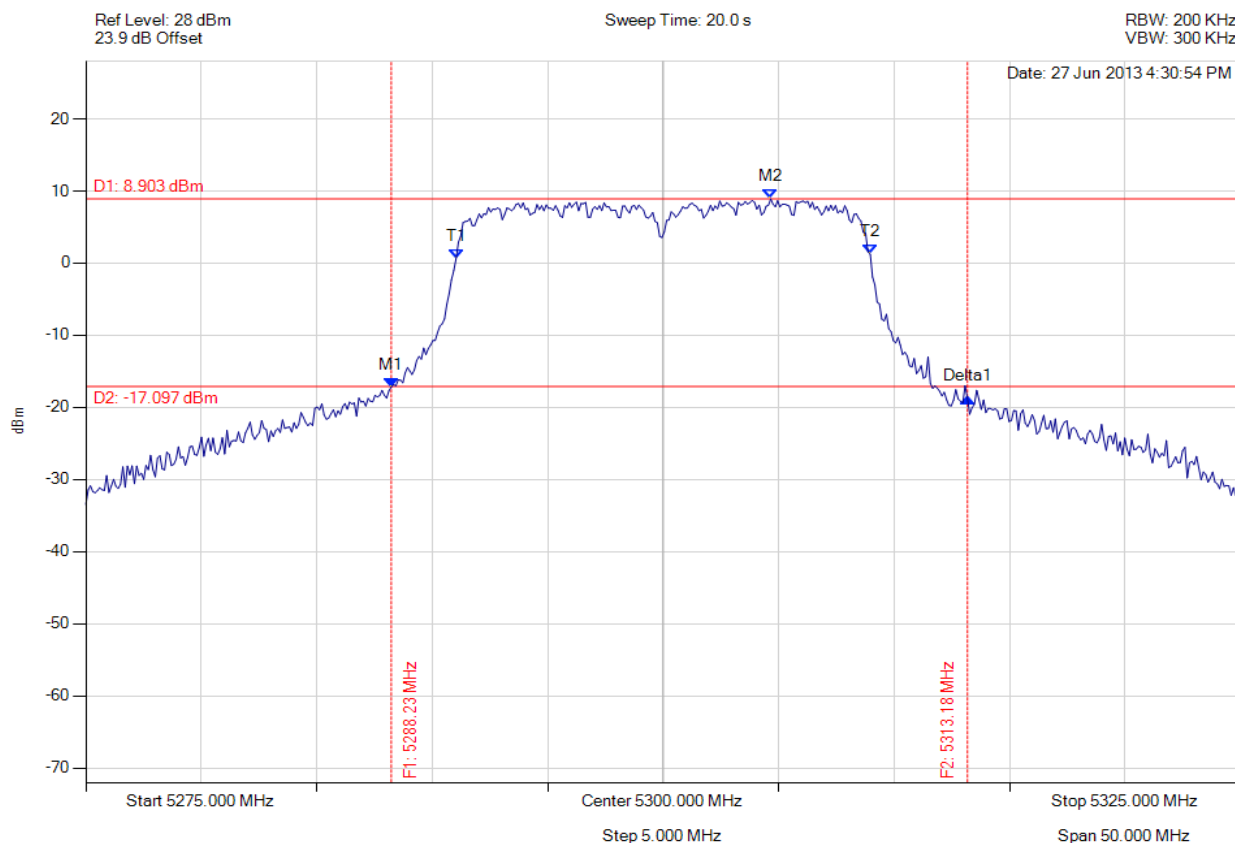

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5288.226 MHz : -17.161 dBm M2 : 5304.659 MHz : 8.903 dBm Delta1 : 24.950 MHz : -1.576 dB T1 : 5291.032 MHz : 0.614 dBm T2 : 5308.968 MHz : 1.232 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 24.950 MHz Measured 99% Bandwidth: 17.936 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

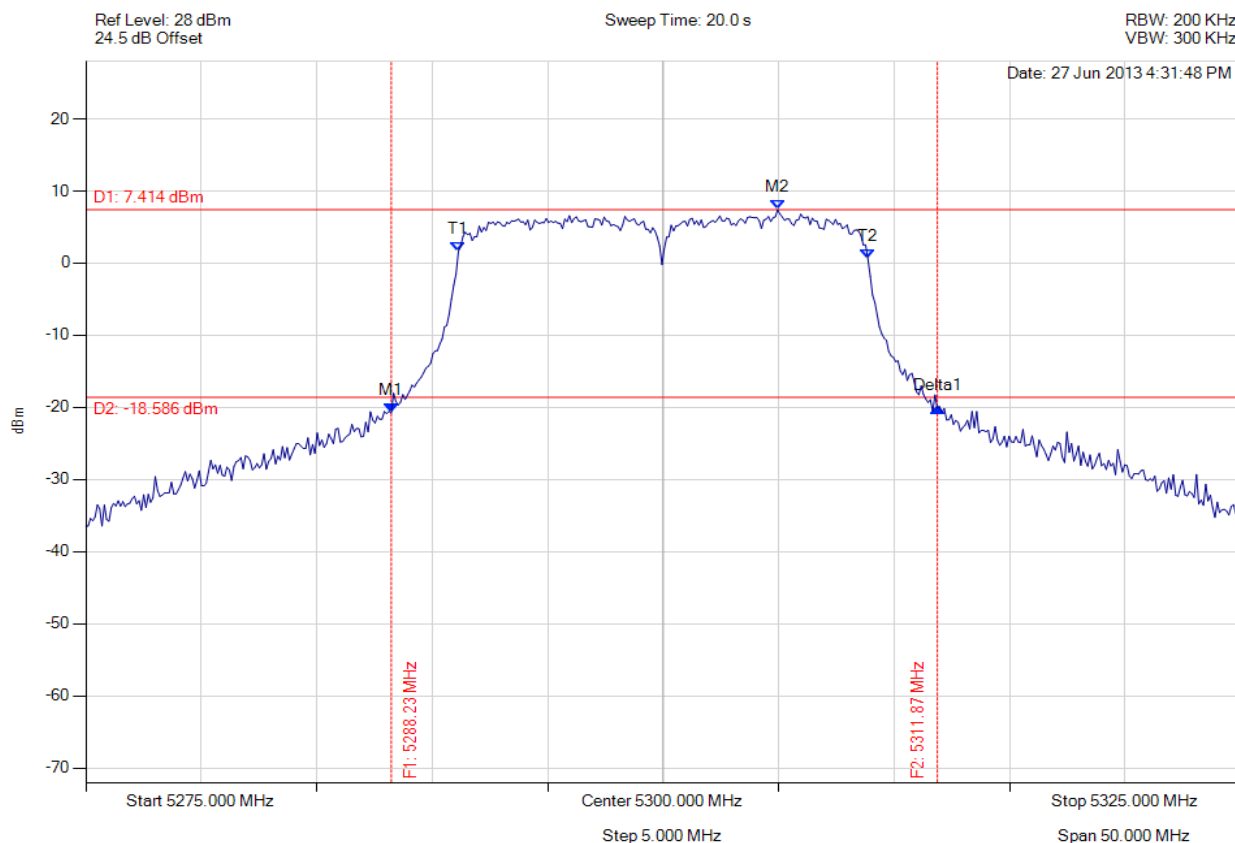

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5288.226 MHz : -20.779 dBm M2 : 5304.960 MHz : 7.414 dBm Delta1 : 23.647 MHz : 0.665 dB T1 : 5291.132 MHz : 1.643 dBm T2 : 5308.868 MHz : 0.565 dBm OBW : 17.735 MHz	Measured 26 dB Bandwidth: 23.647 MHz Measured 99% Bandwidth: 17.735 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

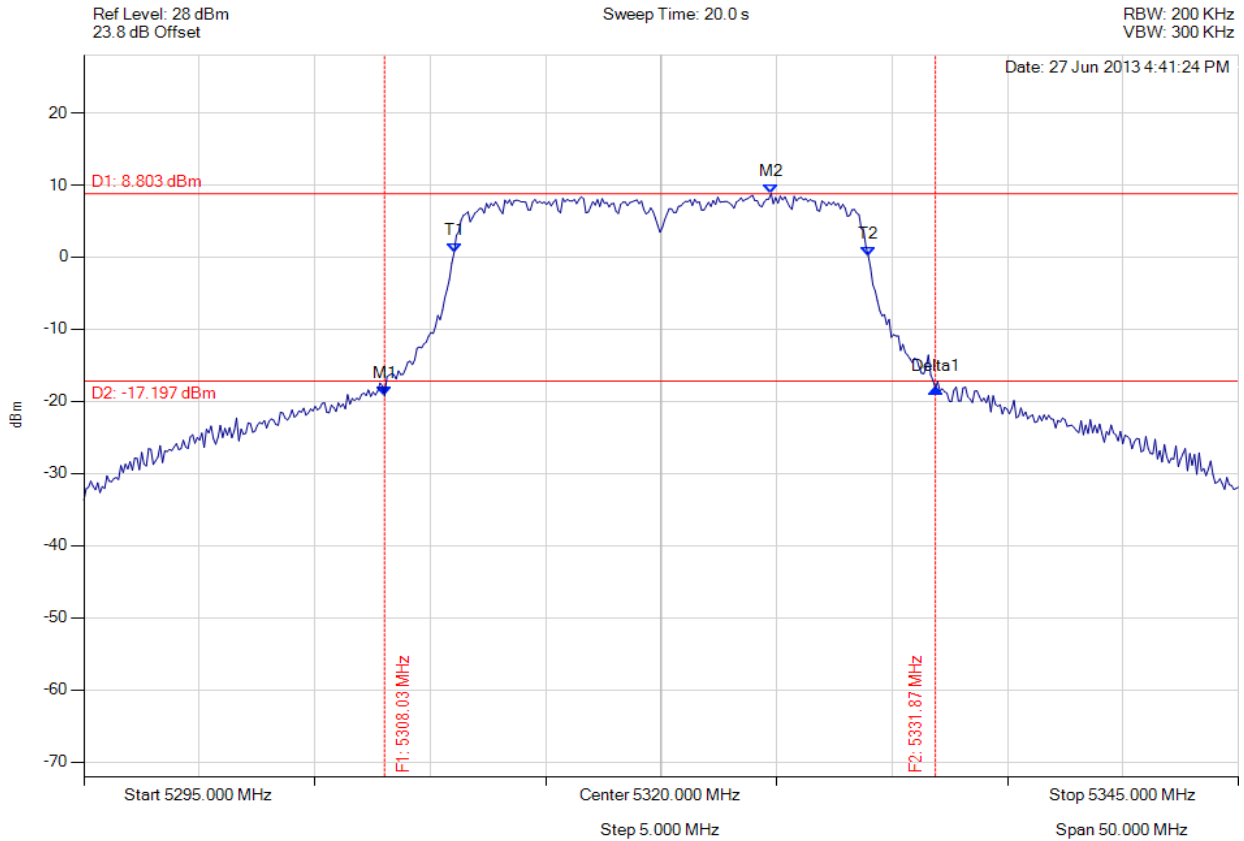

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5308.026 MHz : -19.272 dBm M2 : 5324.760 MHz : 8.803 dBm Delta1 : 23.848 MHz : 1.106 dB T1 : 5311.032 MHz : 0.585 dBm T2 : 5328.968 MHz : 0.172 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 23.848 MHz Measured 99% Bandwidth: 17.936 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

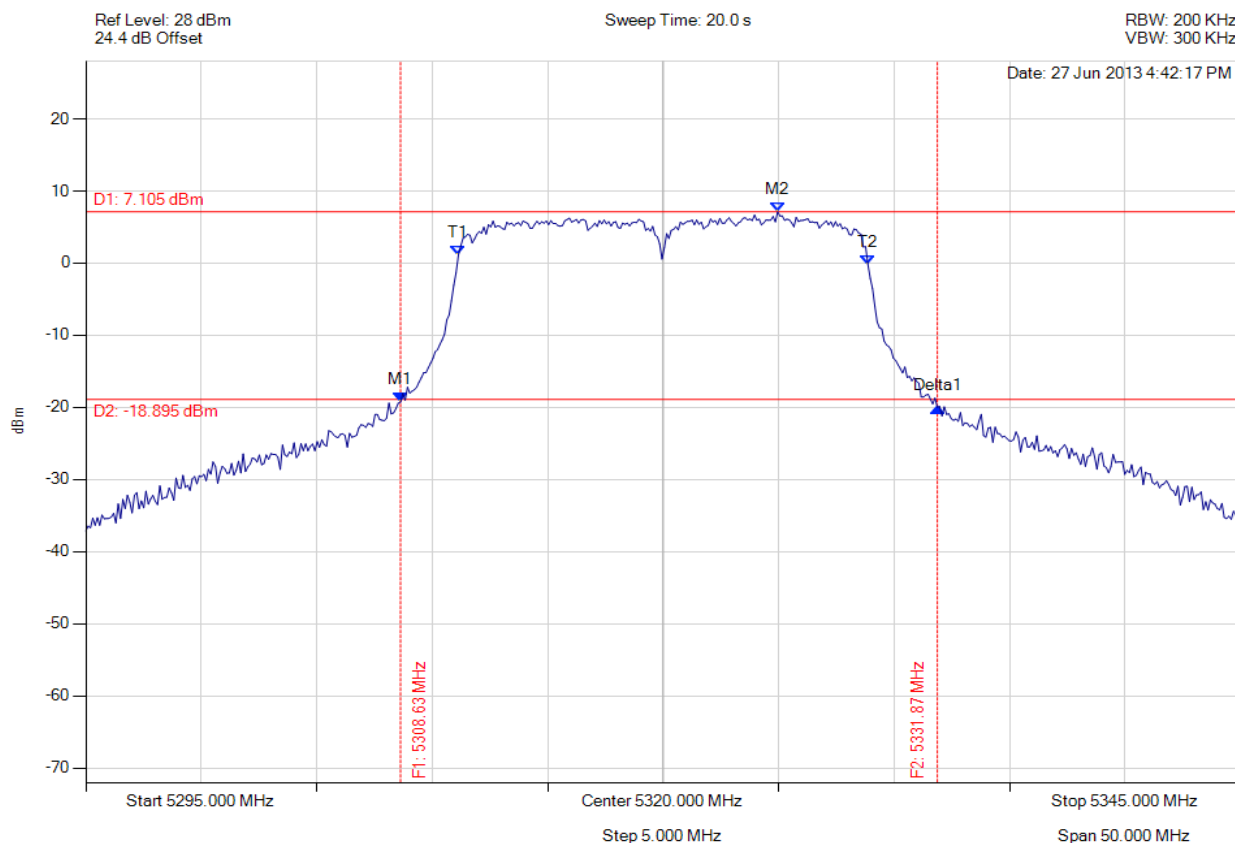

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5308.627 MHz : -19.274 dBm M2 : 5324.960 MHz : 7.105 dBm Delta1 : 23.246 MHz : -0.720 dB T1 : 5311.132 MHz : 1.116 dBm T2 : 5328.868 MHz : -0.186 dBm OBW : 17.735 MHz	Measured 26 dB Bandwidth: 23.246 MHz Measured 99% Bandwidth: 17.735 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 117 of 179



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

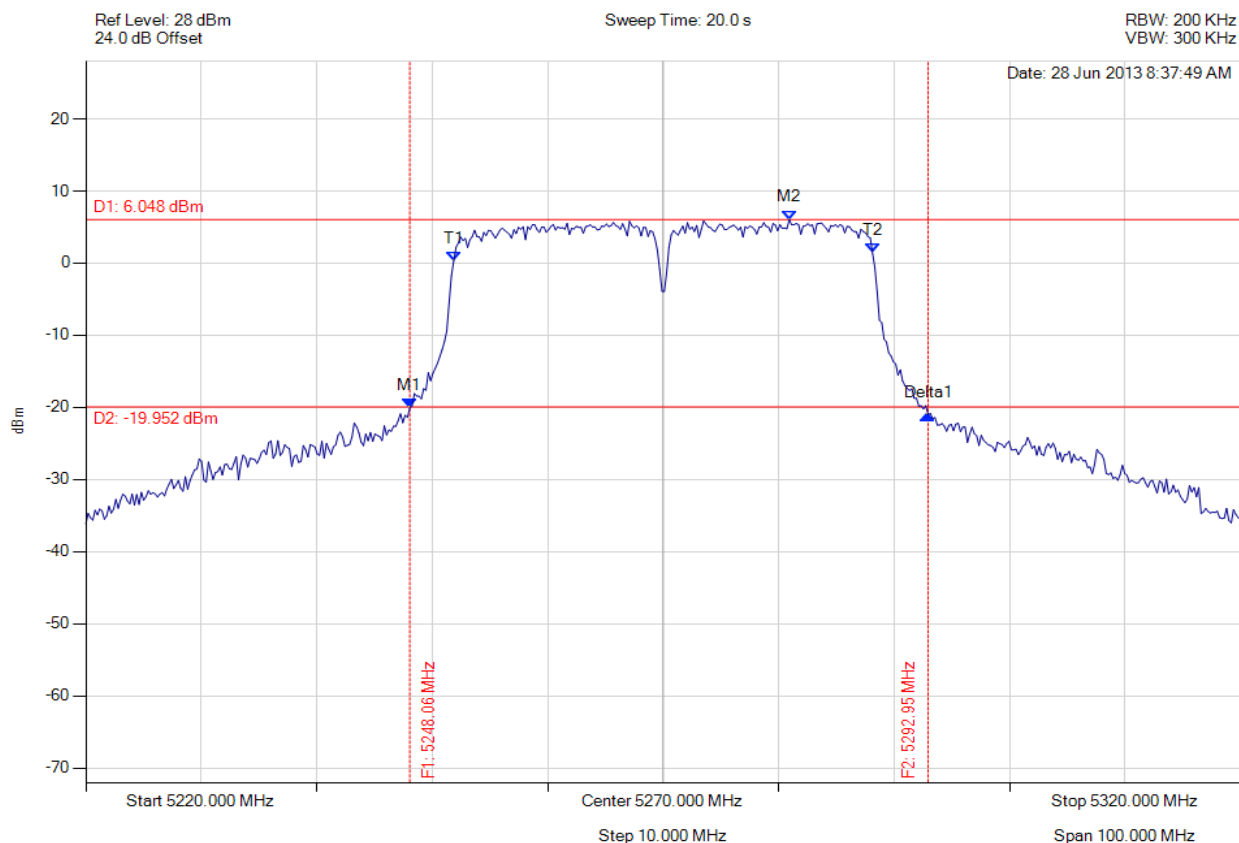

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5248.056 MHz : -20.110 dBm M2 : 5280.922 MHz : 6.048 dBm Delta1 : 44.890 MHz : -0.903 dB T1 : 5251.864 MHz : 0.365 dBm T2 : 5288.136 MHz : 1.393 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 44.890 MHz Measured 99% Bandwidth: 36.273 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 118 of 179



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

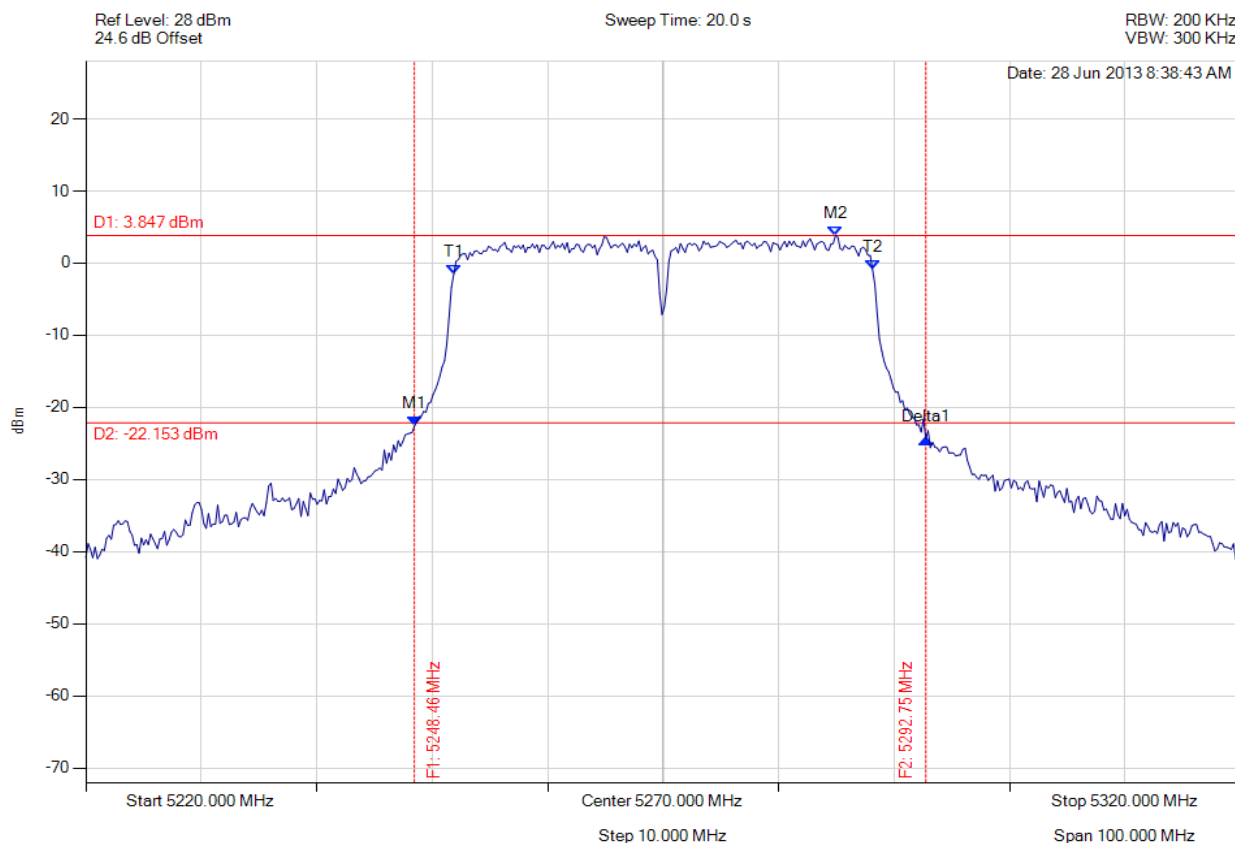

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5248.457 MHz : -22.587 dBm M2 : 5284.930 MHz : 3.847 dBm Delta1 : 44.289 MHz : -1.790 dB T1 : 5251.864 MHz : -1.491 dBm T2 : 5288.136 MHz : -0.920 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 44.289 MHz Measured 99% Bandwidth: 36.273 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

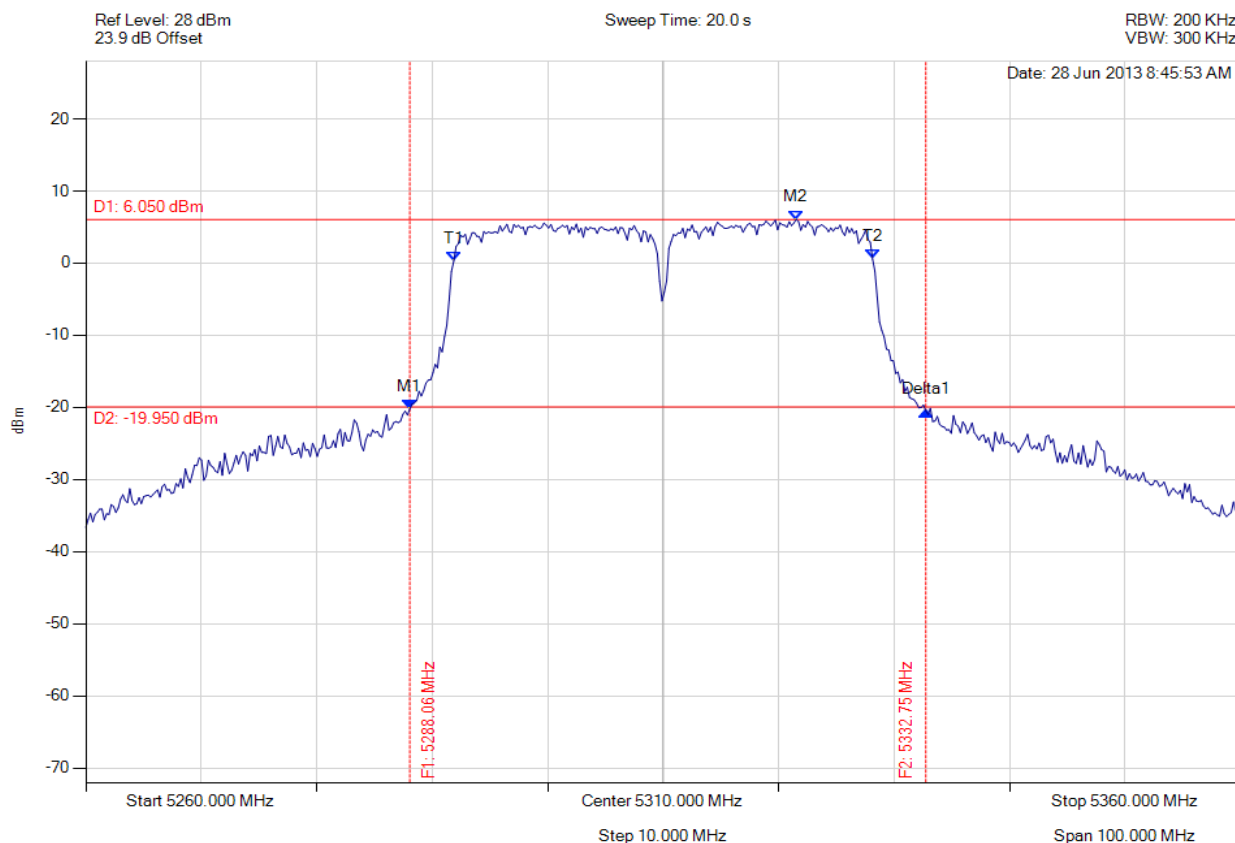

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5288.056 MHz : -20.236 dBm M2 : 5321.523 MHz : 6.050 dBm Delta1 : 44.689 MHz : -0.242 dB T1 : 5291.864 MHz : 0.280 dBm T2 : 5328.136 MHz : 0.579 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 44.689 MHz Measured 99% Bandwidth: 36.273 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

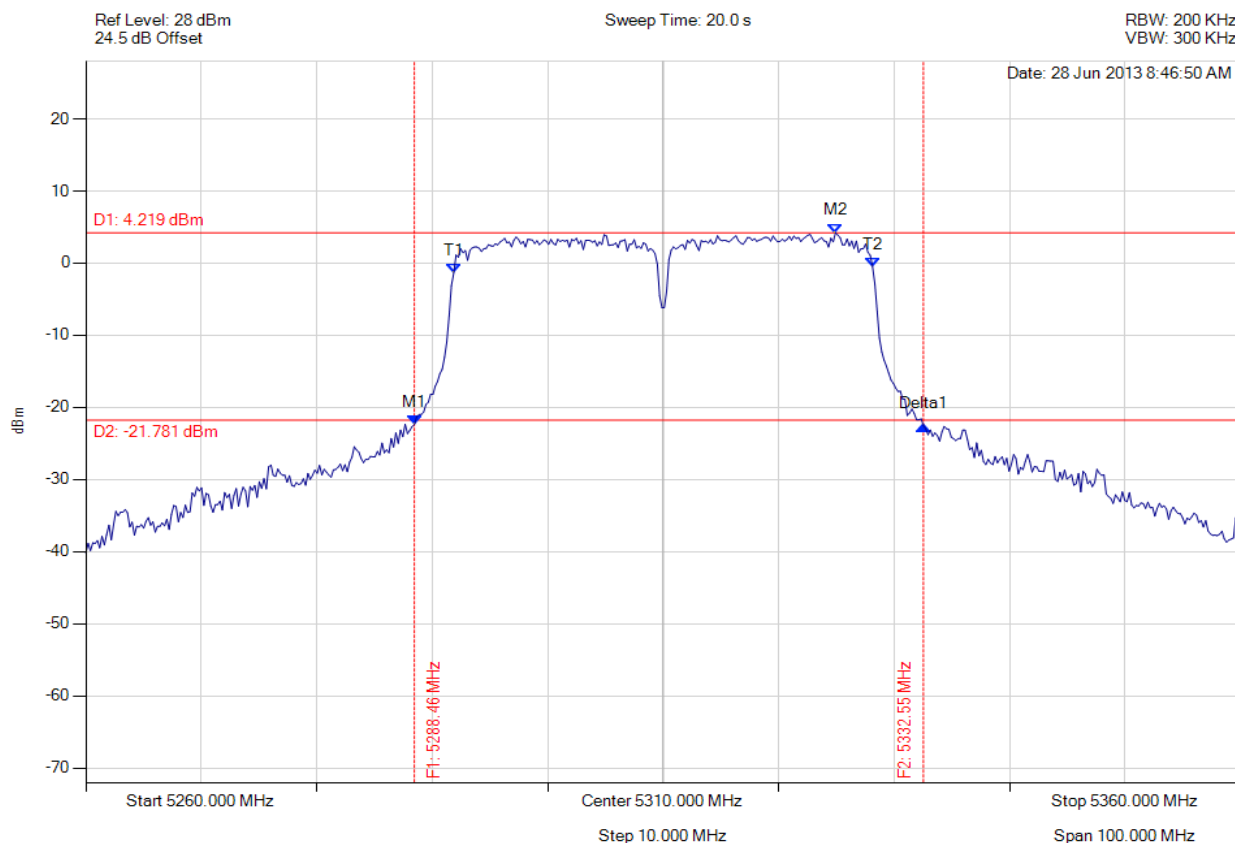

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5288.457 MHz : -22.362 dBm M2 : 5324.930 MHz : 4.219 dBm Delta1 : 44.088 MHz : -0.165 dB T1 : 5291.864 MHz : -1.341 dBm T2 : 5328.136 MHz : -0.493 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 44.088 MHz Measured 99% Bandwidth: 36.273 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5500.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

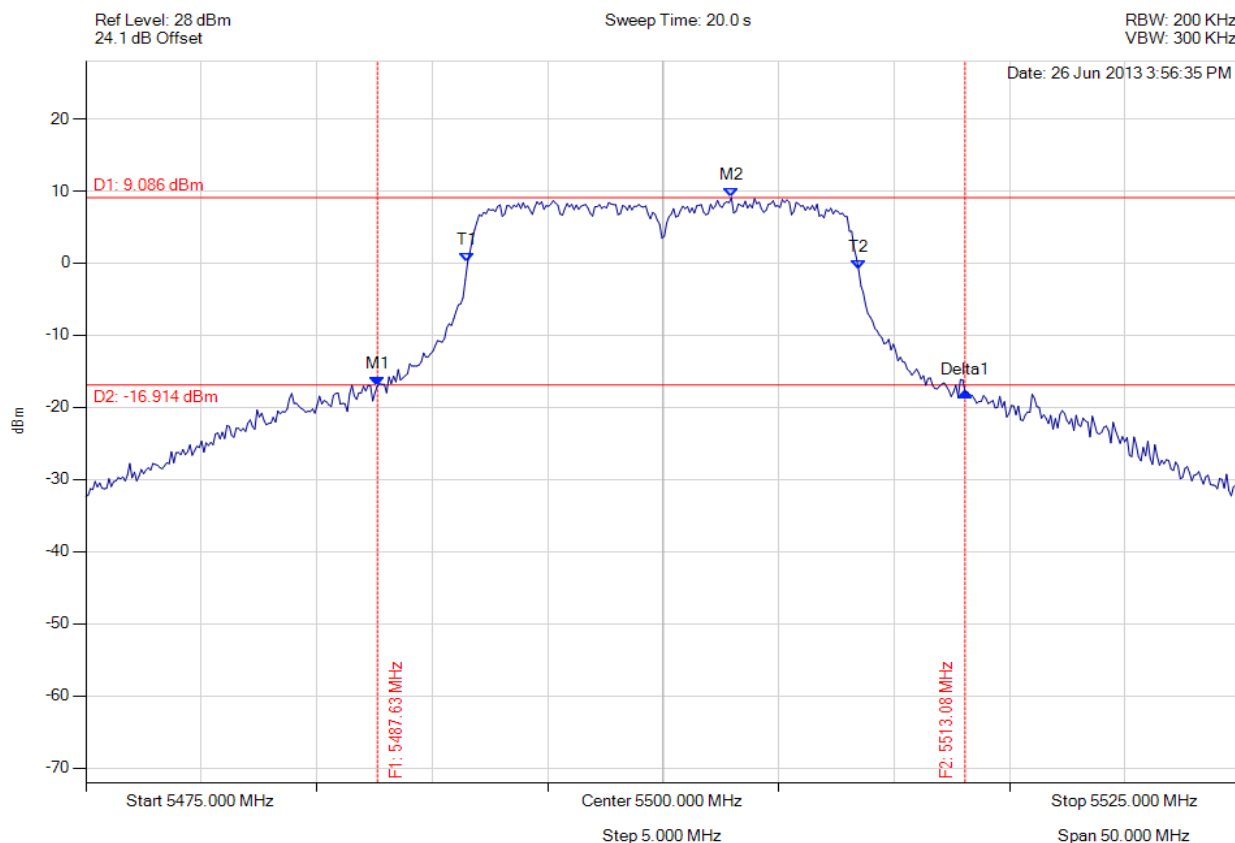

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5487.625 MHz : -16.991 dBm M2 : 5502.956 MHz : 9.086 dBm Delta1 : 25.451 MHz : -0.901 dB T1 : 5491.533 MHz : 0.085 dBm T2 : 5508.467 MHz : -0.938 dBm OBW : 16.934 MHz	Measured 26 dB Bandwidth: 25.451 MHz Measured 99% Bandwidth: 16.934 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5500.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

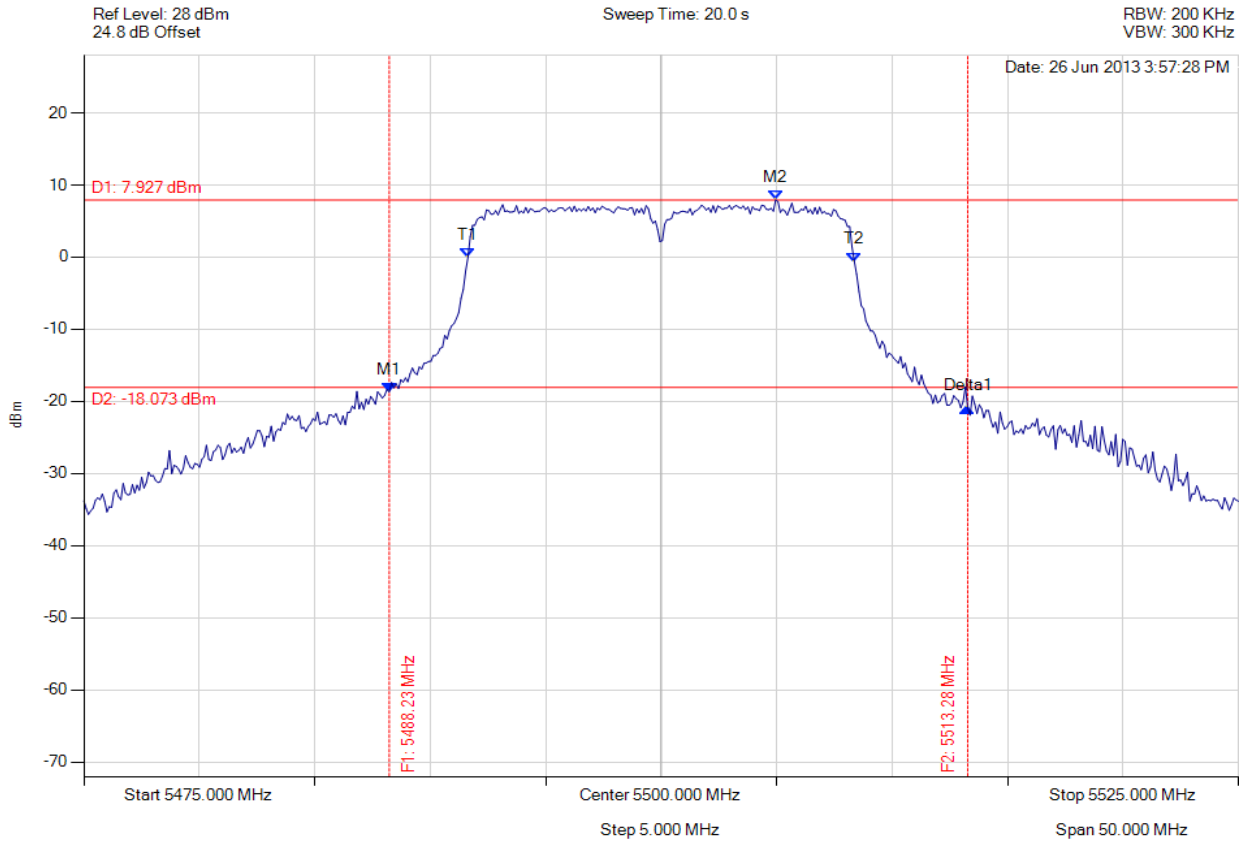

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5488.226 MHz : -18.697 dBm M2 : 5504.960 MHz : 7.927 dBm Delta1 : 25.050 MHz : -2.241 dB T1 : 5491.633 MHz : -0.033 dBm T2 : 5508.367 MHz : -0.617 dBm OBW : 16.733 MHz	Measured 26 dB Bandwidth: 25.050 MHz Measured 99% Bandwidth: 16.733 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5580.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

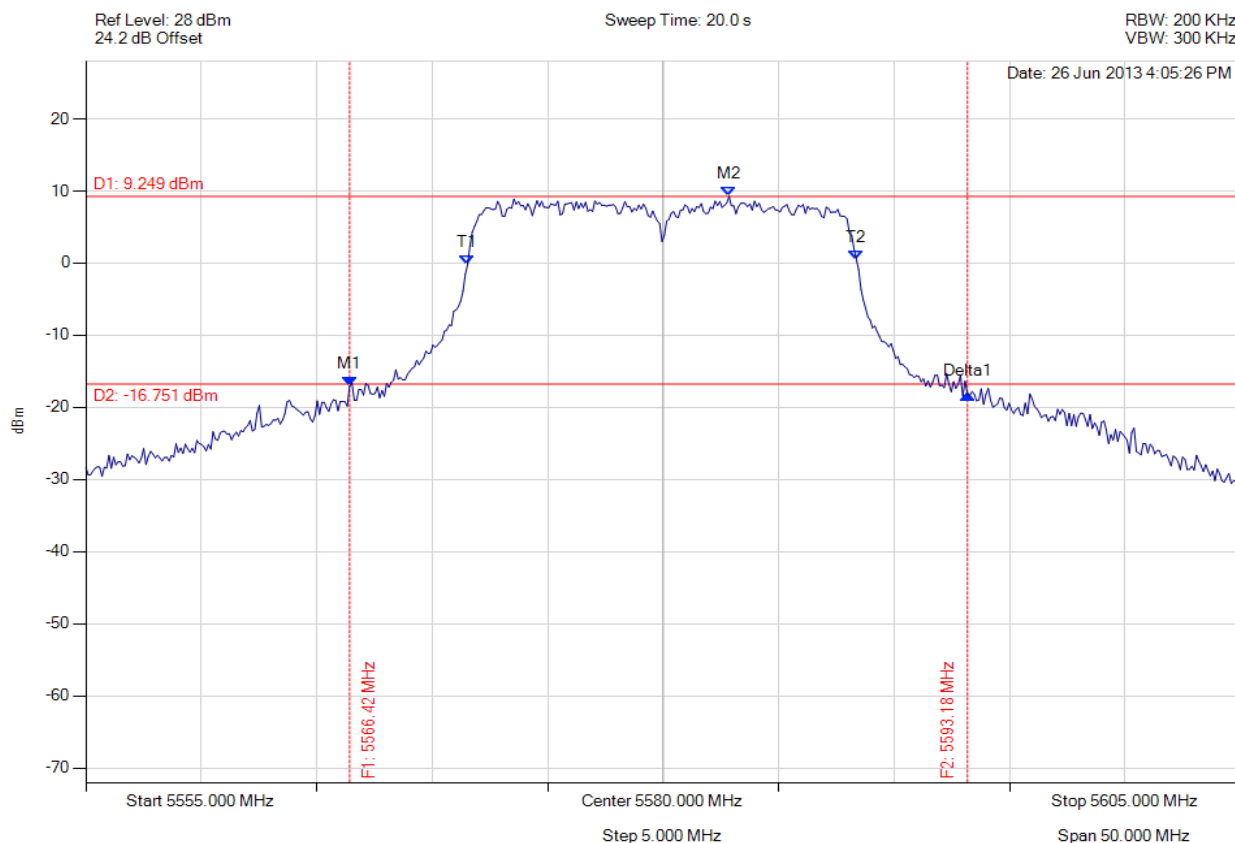

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5566.423 MHz : -17.027 dBm M2 : 5582.856 MHz : 9.249 dBm Delta1 : 26.754 MHz : -1.110 dB T1 : 5571.533 MHz : -0.218 dBm T2 : 5588.367 MHz : 0.510 dBm OBW : 16.834 MHz	Measured 26 dB Bandwidth: 26.754 MHz Measured 99% Bandwidth: 16.834 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 124 of 179



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5580.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

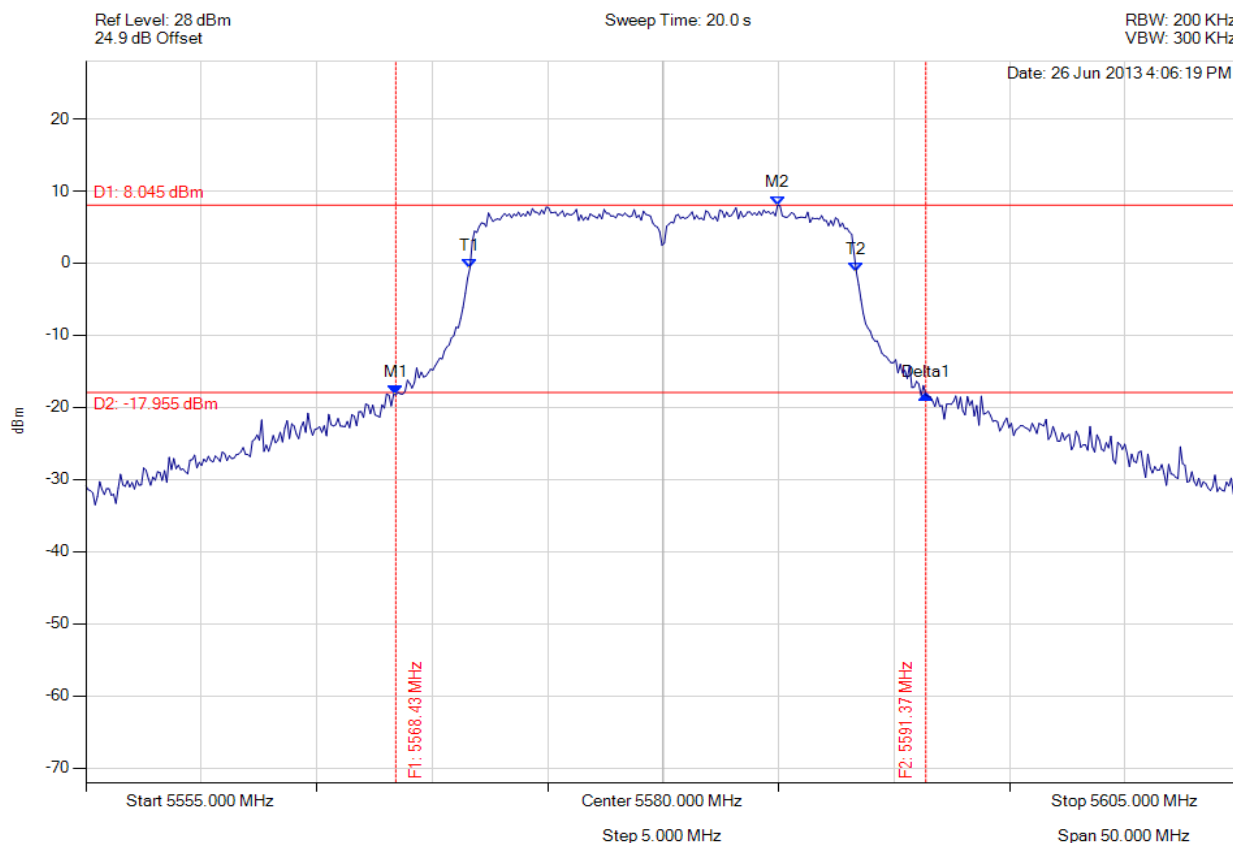

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5568.427 MHz : -18.264 dBm M2 : 5584.960 MHz : 8.045 dBm Delta1 : 22.946 MHz : -0.024 dB T1 : 5571.633 MHz : -0.680 dBm T2 : 5588.367 MHz : -1.219 dBm OBW : 16.733 MHz	Measured 26 dB Bandwidth: 22.946 MHz Measured 99% Bandwidth: 16.733 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5700.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

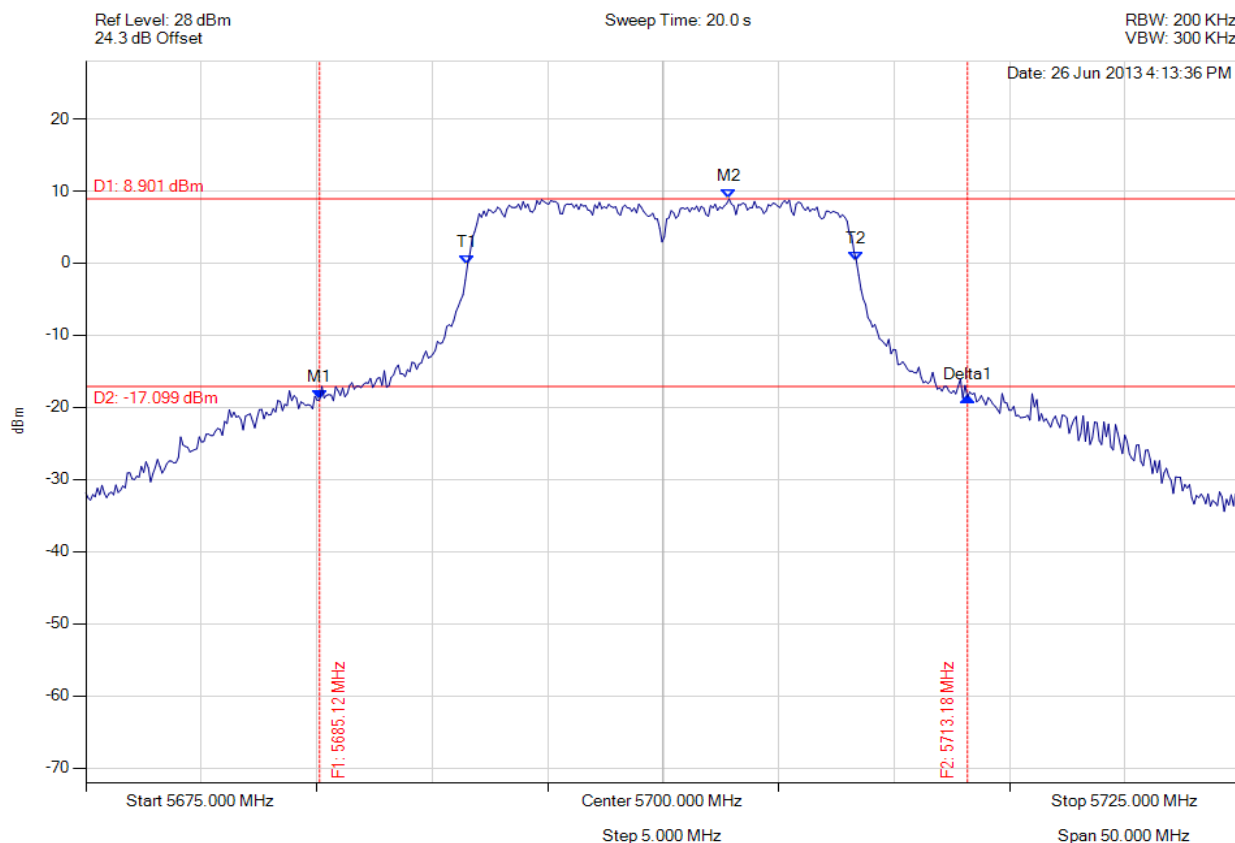

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5685.120 MHz : -18.953 dBm M2 : 5702.856 MHz : 8.901 dBm Delta1 : 28.056 MHz : 0.374 dB T1 : 5691.533 MHz : -0.186 dBm T2 : 5708.367 MHz : 0.302 dBm OBW : 16.834 MHz	Measured 26 dB Bandwidth: 28.056 MHz Measured 99% Bandwidth: 16.834 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5700.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

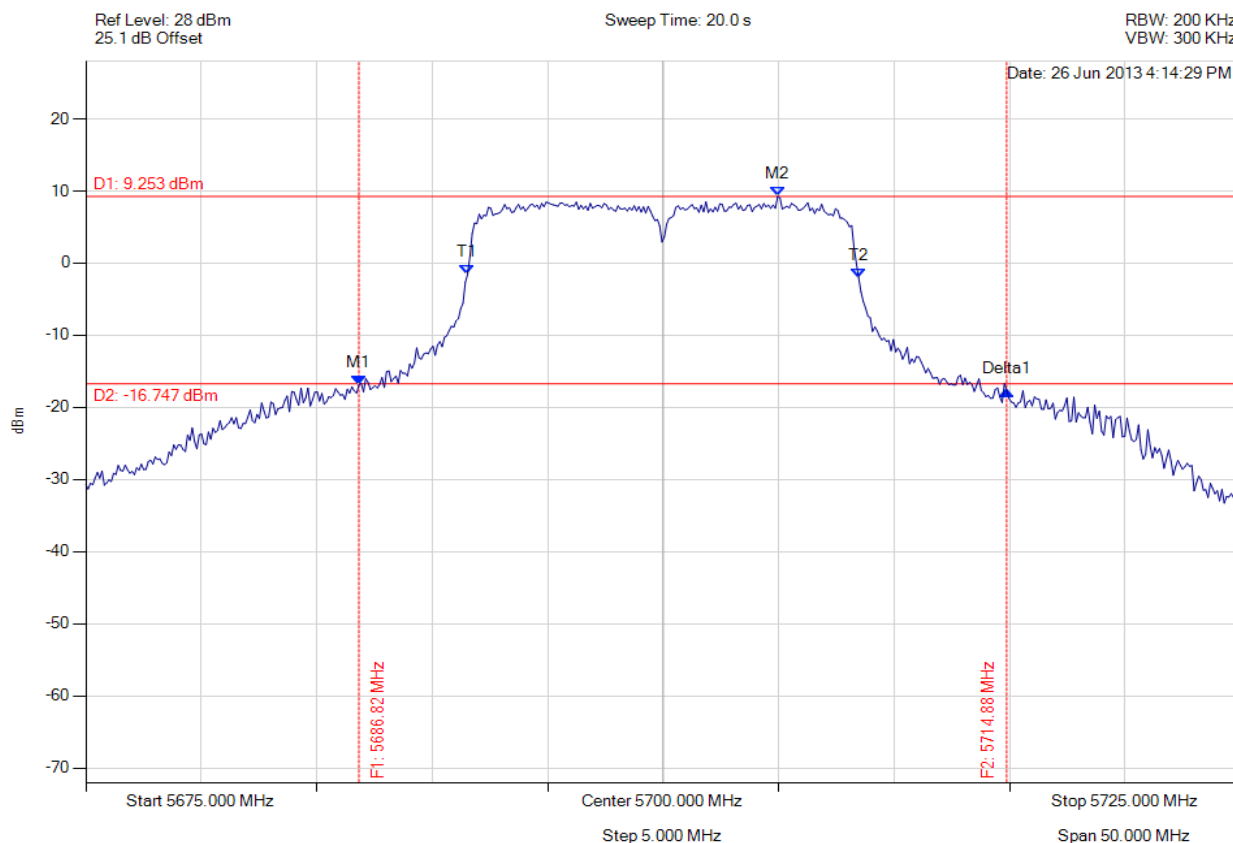

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5686.824 MHz : -16.887 dBm M2 : 5704.960 MHz : 9.253 dBm Delta1 : 28.056 MHz : -0.816 dB T1 : 5691.533 MHz : -1.546 dBm T2 : 5708.467 MHz : -2.040 dBm OBW : 16.934 MHz	Measured 26 dB Bandwidth: 28.056 MHz Measured 99% Bandwidth: 16.934 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

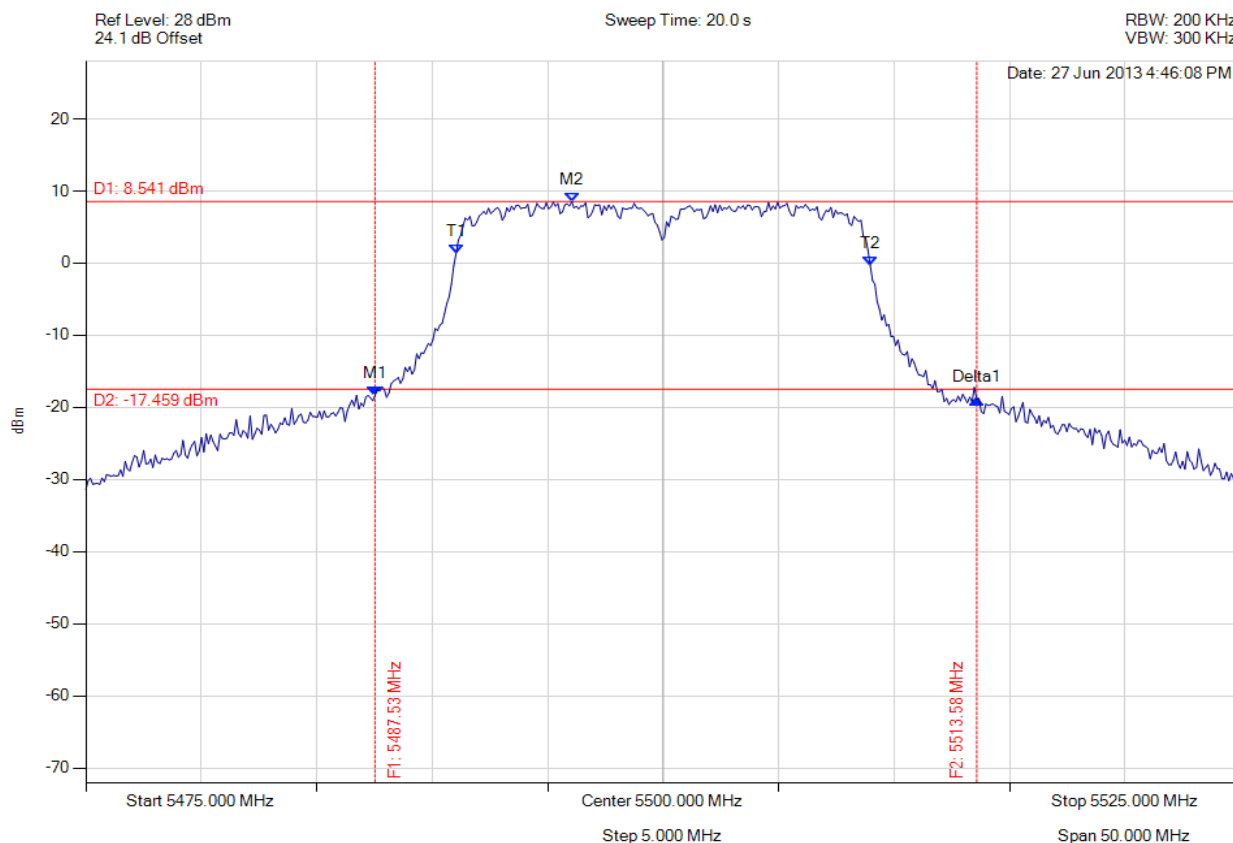

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5487.525 MHz : -18.335 dBm M2 : 5496.042 MHz : 8.541 dBm Delta1 : 26.052 MHz : -0.533 dB T1 : 5491.032 MHz : 1.293 dBm T2 : 5508.968 MHz : -0.340 dBm OBW : 17.936 MHz	Measured 26 dB Bandwidth: 26.052 MHz Measured 99% Bandwidth: 17.936 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 128 of 179



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

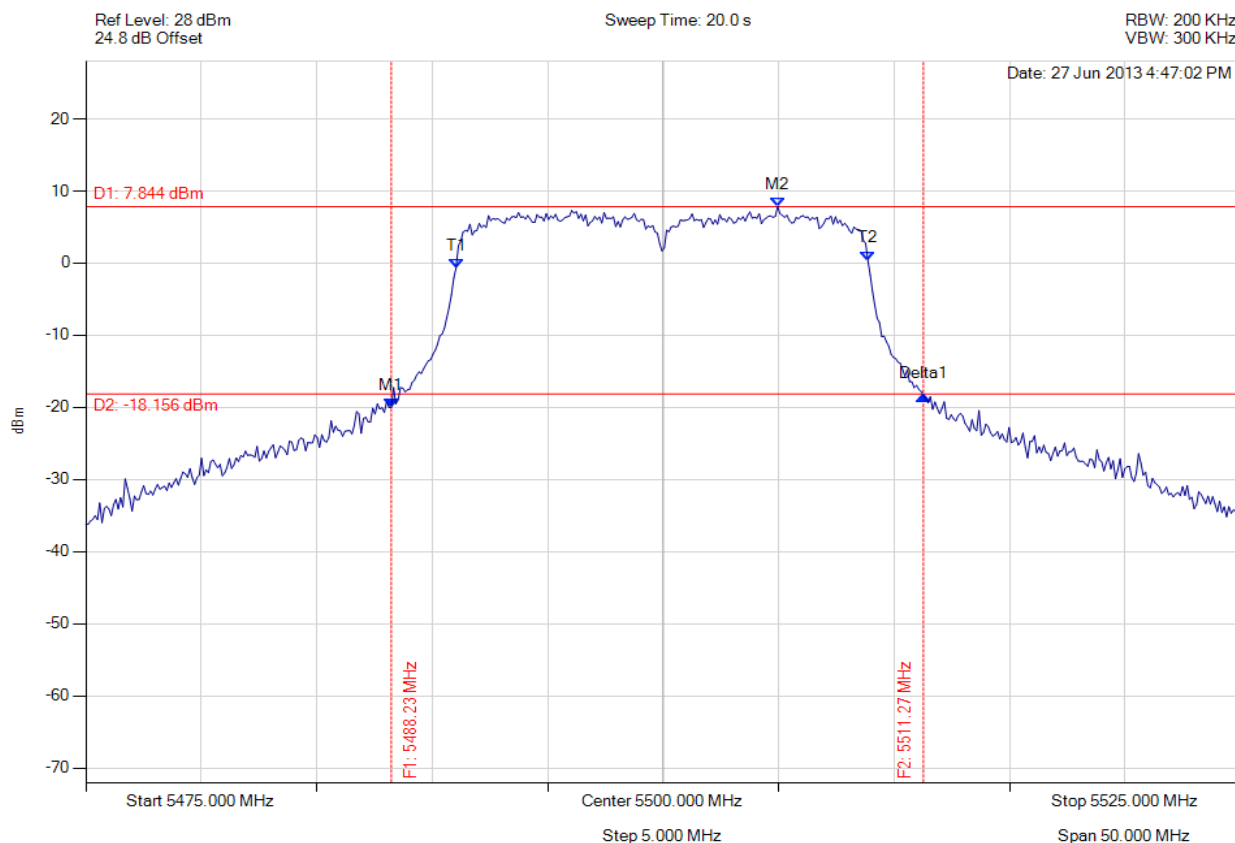

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5488.226 MHz : -20.037 dBm M2 : 5504.960 MHz : 7.844 dBm Delta1 : 23.046 MHz : 1.690 dB T1 : 5491.032 MHz : -0.664 dBm T2 : 5508.868 MHz : 0.376 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 23.046 MHz Measured 99% Bandwidth: 17.836 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

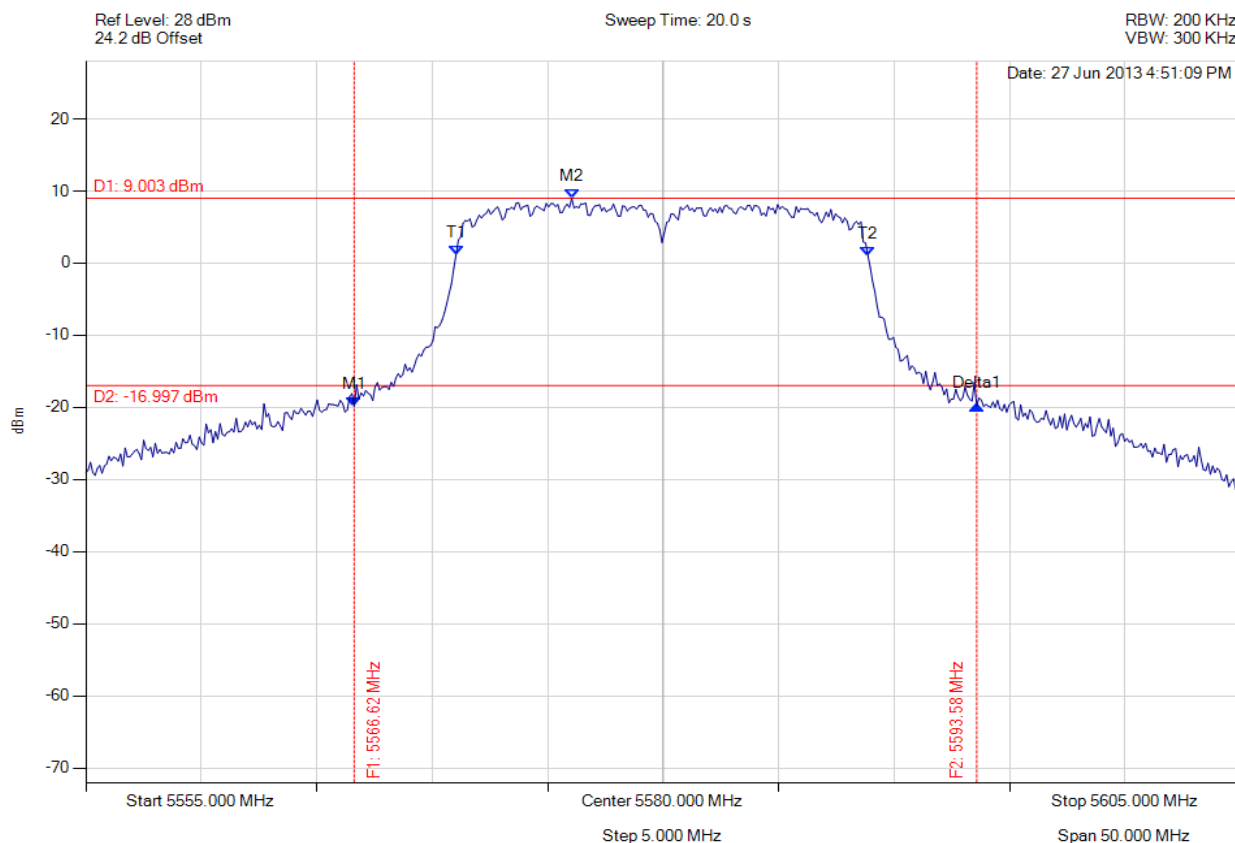

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5566.623 MHz : -19.883 dBm M2 : 5576.042 MHz : 9.003 dBm Delta1 : 26.954 MHz : 0.112 dB T1 : 5571.032 MHz : 1.167 dBm T2 : 5588.868 MHz : 1.033 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 26.954 MHz Measured 99% Bandwidth: 17.836 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 130 of 179



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

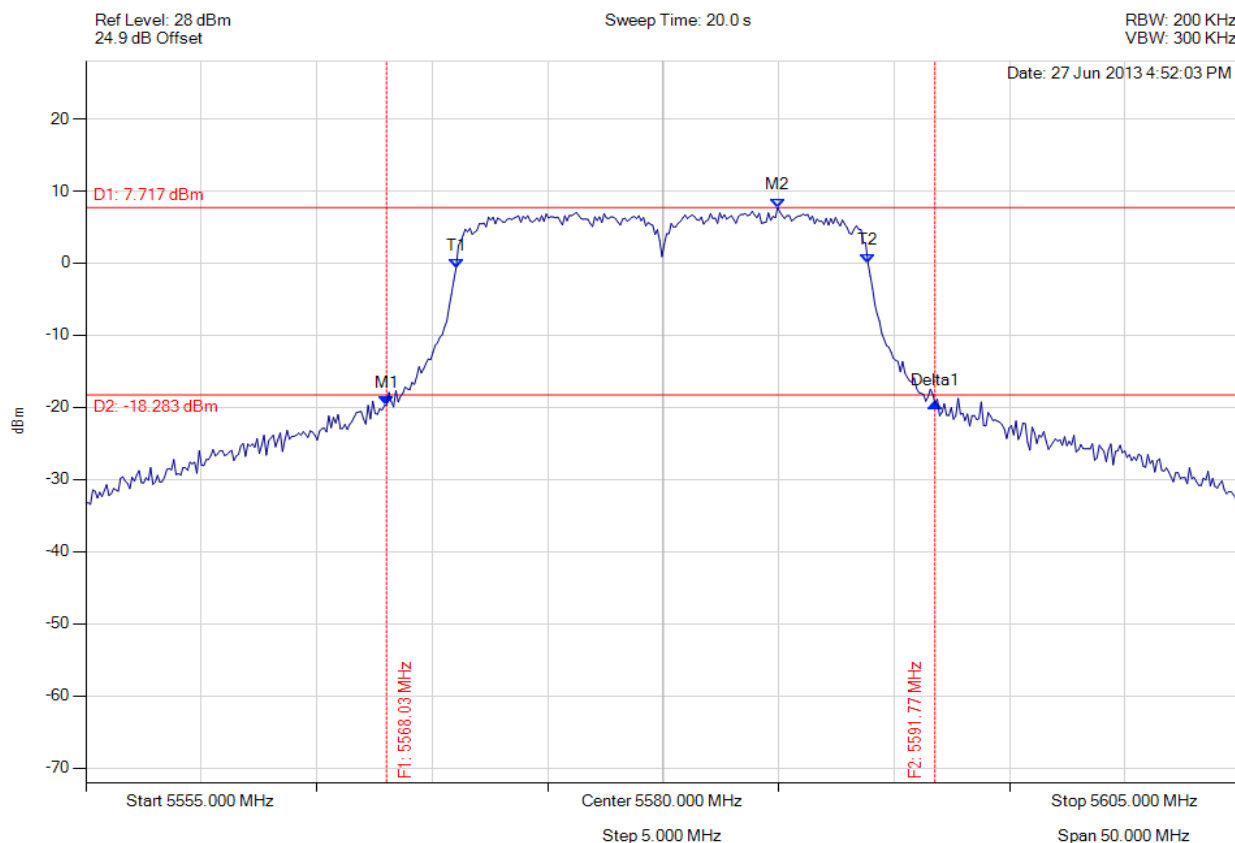

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5568.026 MHz : -19.669 dBm M2 : 5584.960 MHz : 7.717 dBm Delta1 : 23.747 MHz : 0.230 dB T1 : 5571.032 MHz : -0.716 dBm T2 : 5588.868 MHz : 0.050 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 23.747 MHz Measured 99% Bandwidth: 17.836 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5700.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

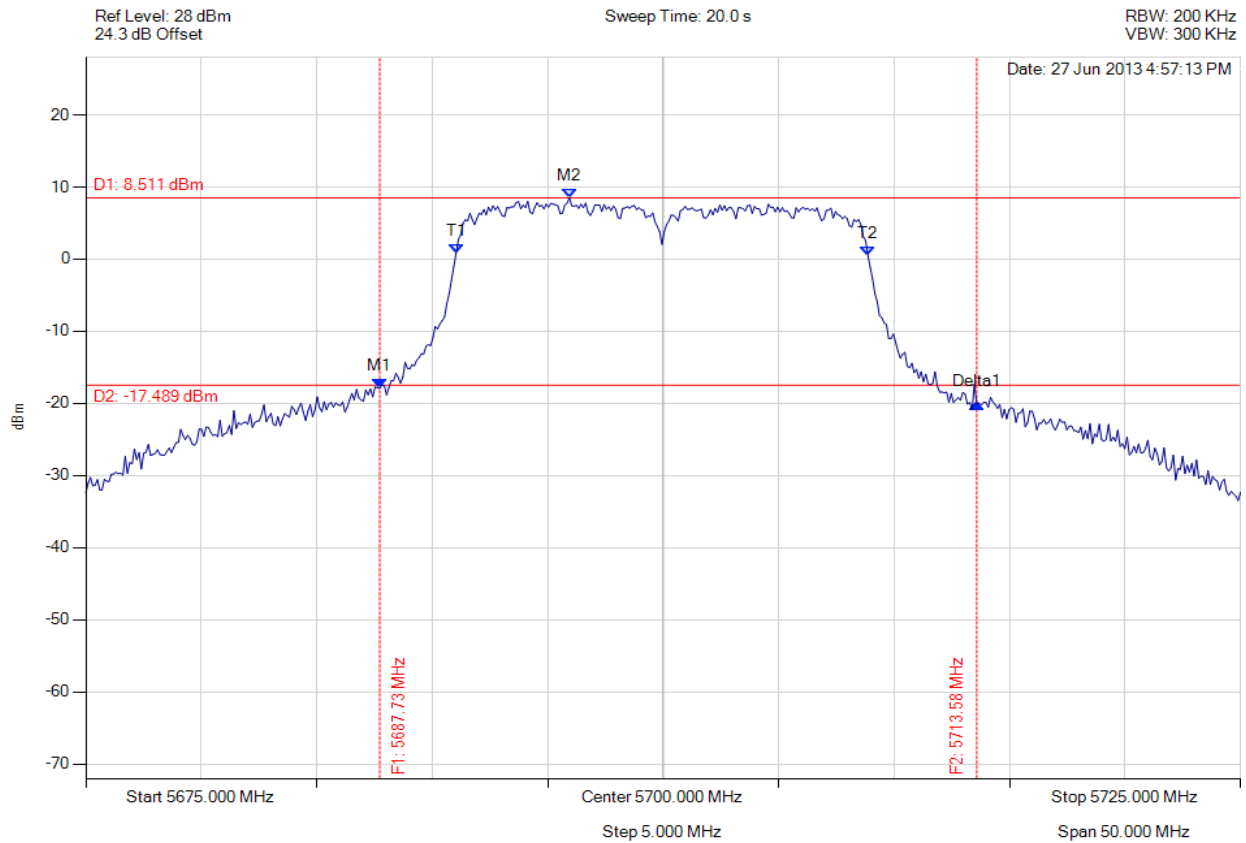

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5687.725 MHz : -17.914 dBm M2 : 5695.942 MHz : 8.511 dBm Delta1 : 25.852 MHz : -2.146 dB T1 : 5691.032 MHz : 0.776 dBm T2 : 5708.868 MHz : 0.520 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 25.852 MHz Measured 99% Bandwidth: 17.836 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 132 of 179



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5700.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

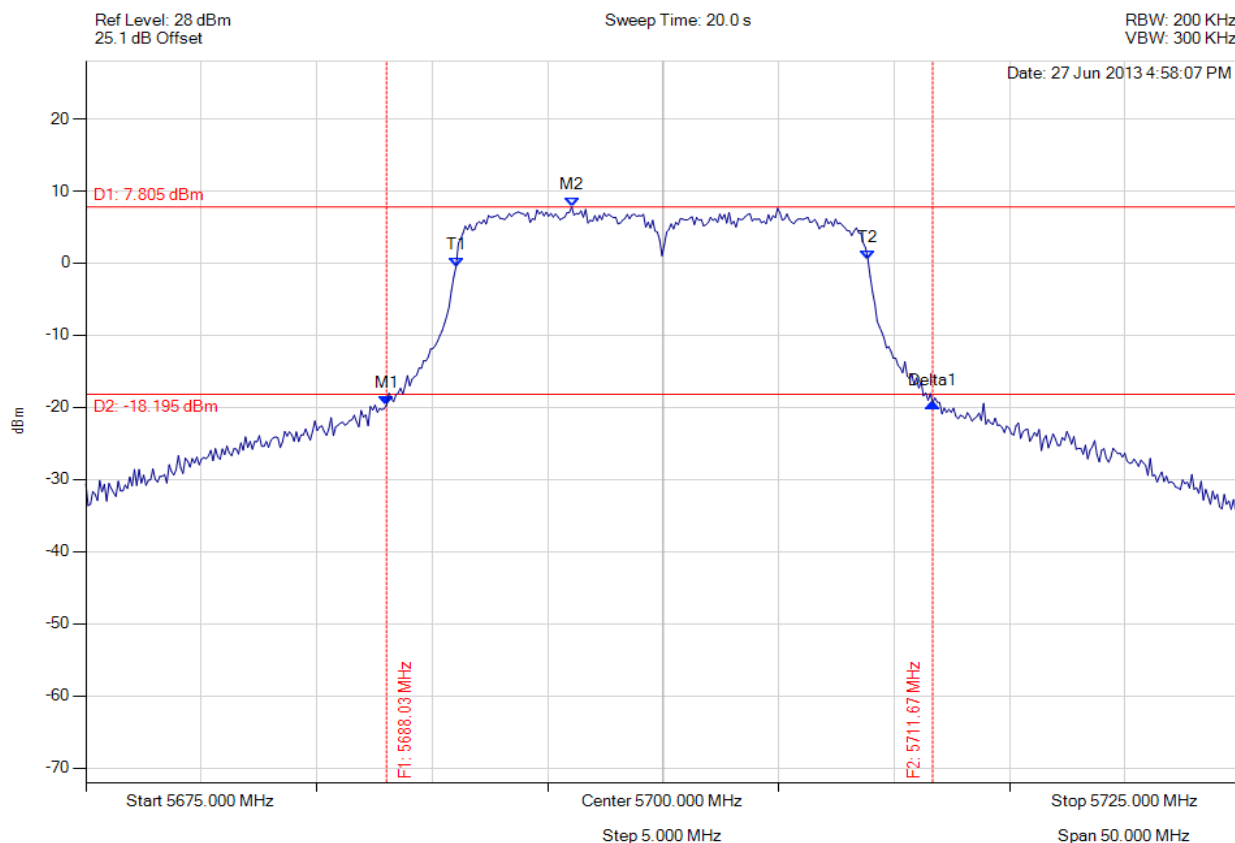

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5688.026 MHz : -19.649 dBm M2 : 5696.042 MHz : 7.805 dBm Delta1 : 23.647 MHz : 0.315 dB T1 : 5691.032 MHz : -0.479 dBm T2 : 5708.868 MHz : 0.473 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 23.647 MHz Measured 99% Bandwidth: 17.836 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 133 of 179



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

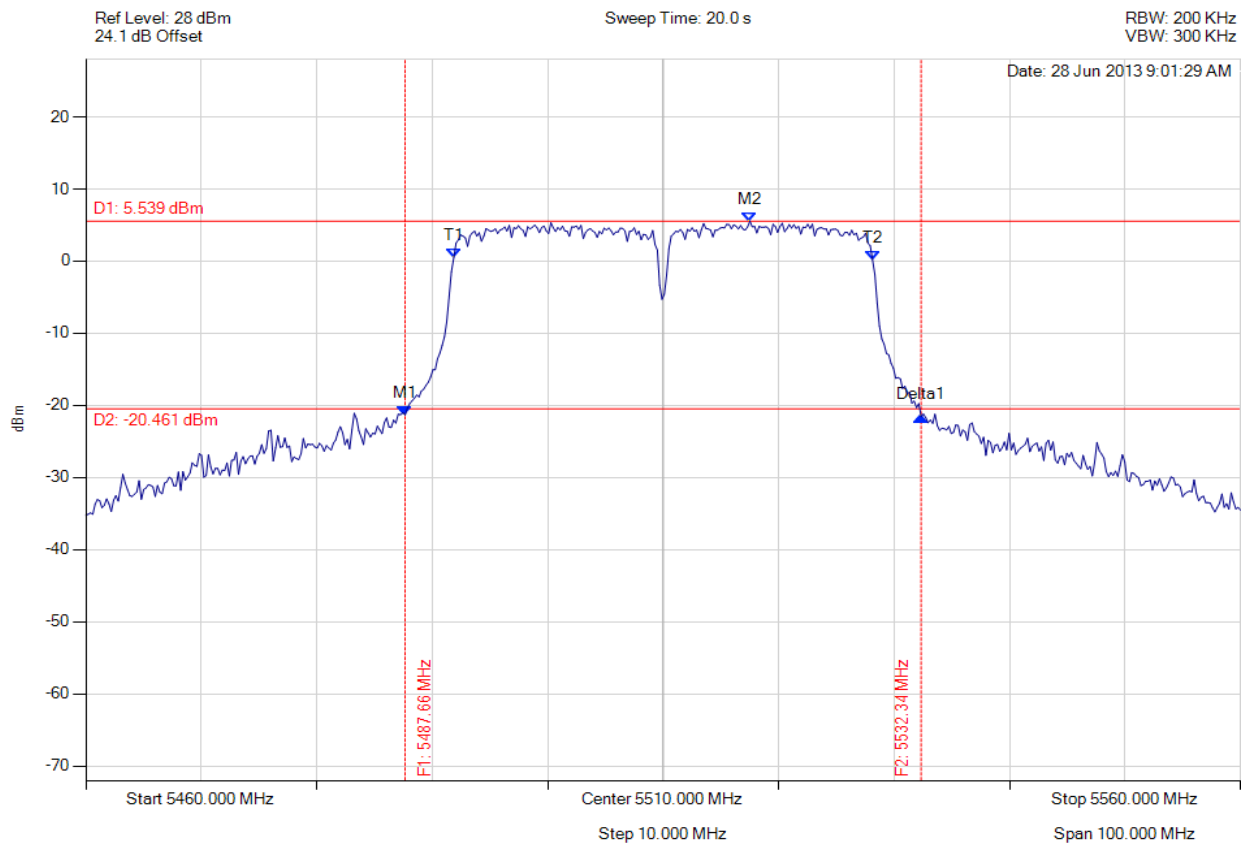

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5487.655 MHz : -21.335 dBm M2 : 5517.515 MHz : 5.539 dBm Delta1 : 44.689 MHz : -0.246 dB T1 : 5491.864 MHz : 0.469 dBm T2 : 5528.136 MHz : 0.166 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 44.689 MHz Measured 99% Bandwidth: 36.273 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

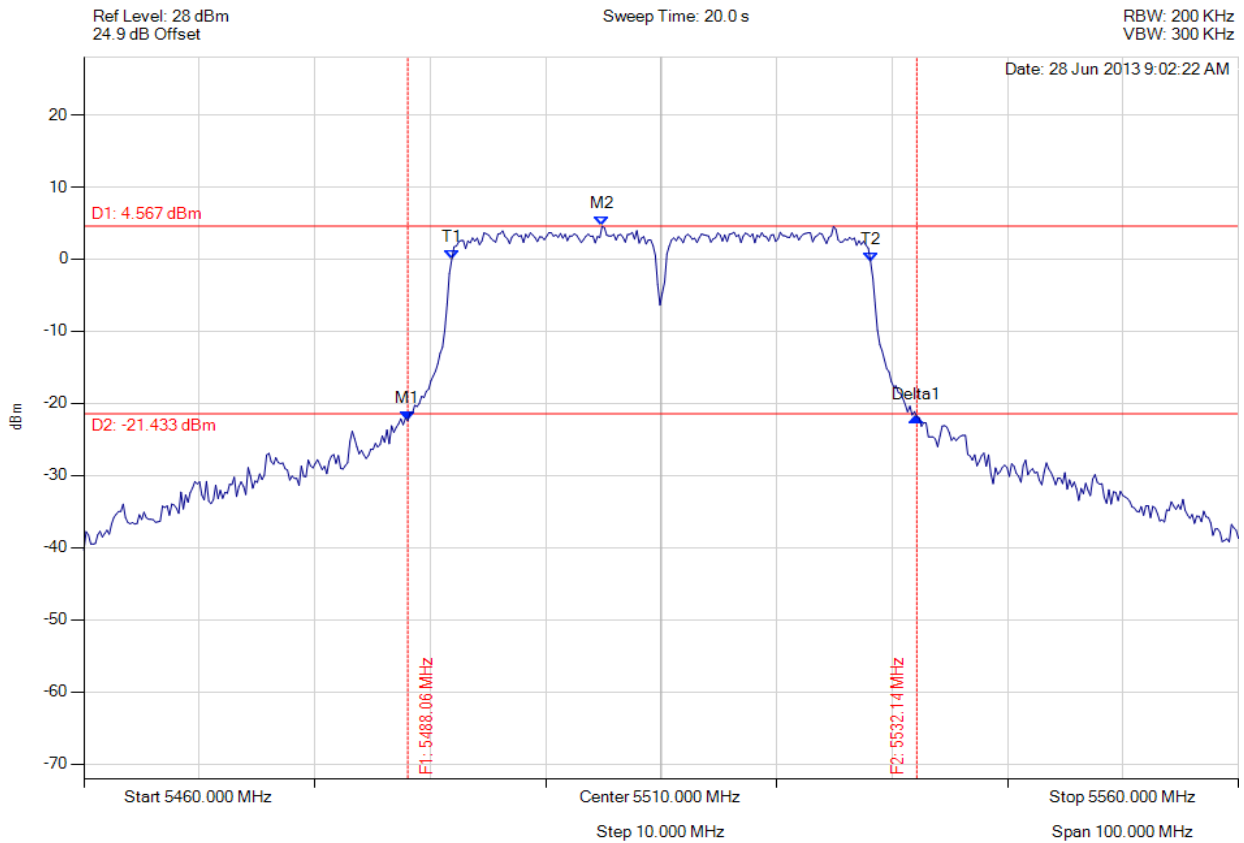

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5488.056 MHz : -22.421 dBm M2 : 5504.890 MHz : 4.567 dBm Delta1 : 44.088 MHz : 0.549 dB T1 : 5491.864 MHz : -0.021 dBm T2 : 5528.136 MHz : -0.348 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 44.088 MHz Measured 99% Bandwidth: 36.273 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 135 of 179



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

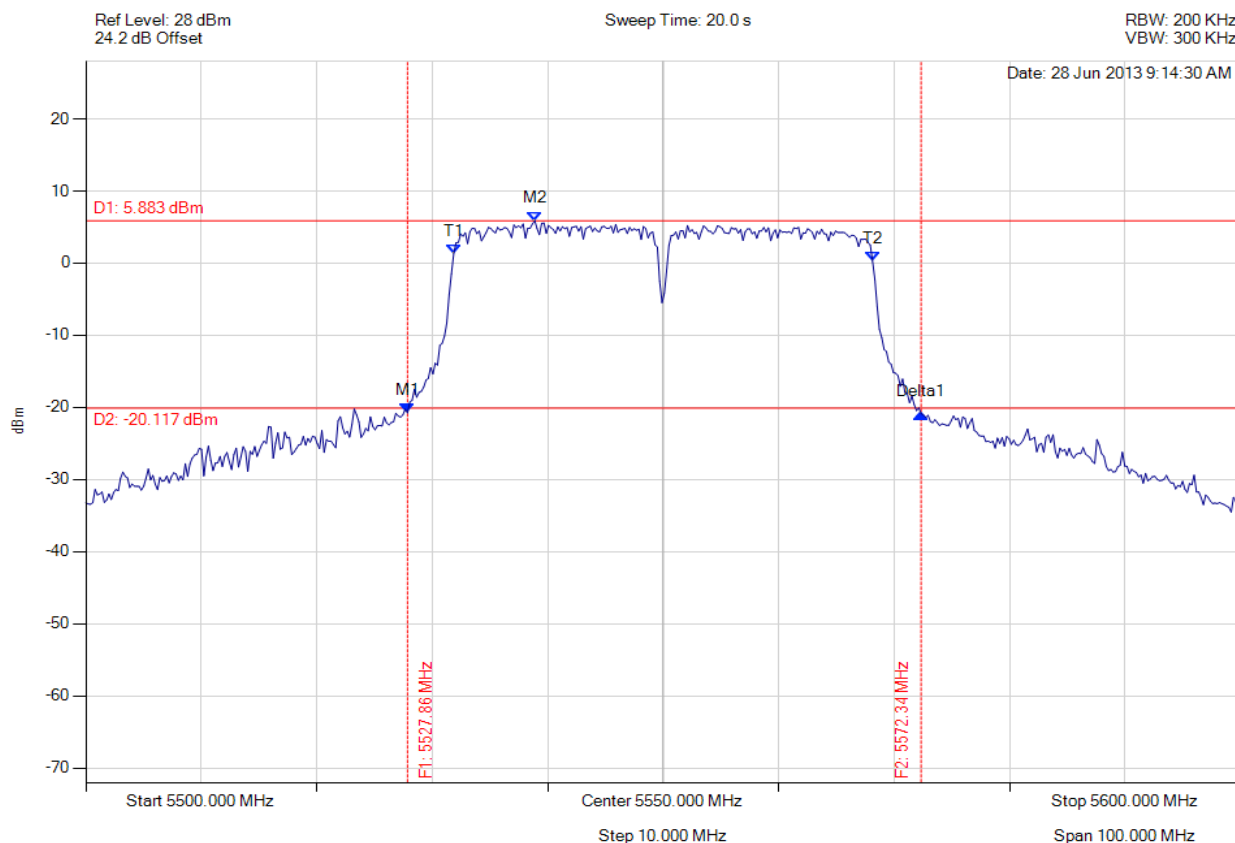

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5527.856 MHz : -20.763 dBm M2 : 5538.878 MHz : 5.883 dBm Delta1 : 44.489 MHz : -0.116 dB T1 : 5531.864 MHz : 1.354 dBm T2 : 5568.136 MHz : 0.264 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 44.489 MHz Measured 99% Bandwidth: 36.273 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 136 of 179



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

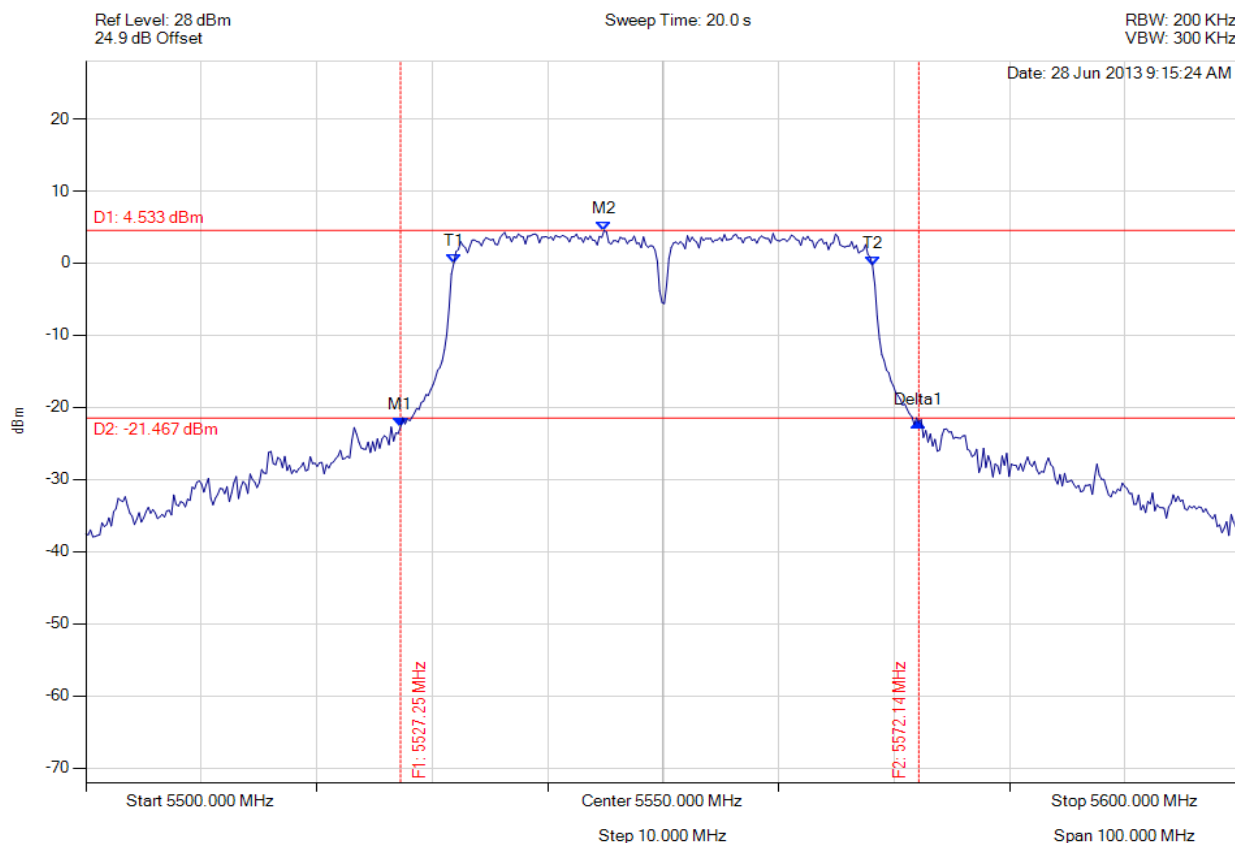

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5527.255 MHz : -22.711 dBm M2 : 5544.890 MHz : 4.533 dBm Delta1 : 44.890 MHz : 0.590 dB T1 : 5531.864 MHz : -0.011 dBm T2 : 5568.136 MHz : -0.352 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 44.890 MHz Measured 99% Bandwidth: 36.273 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5670.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

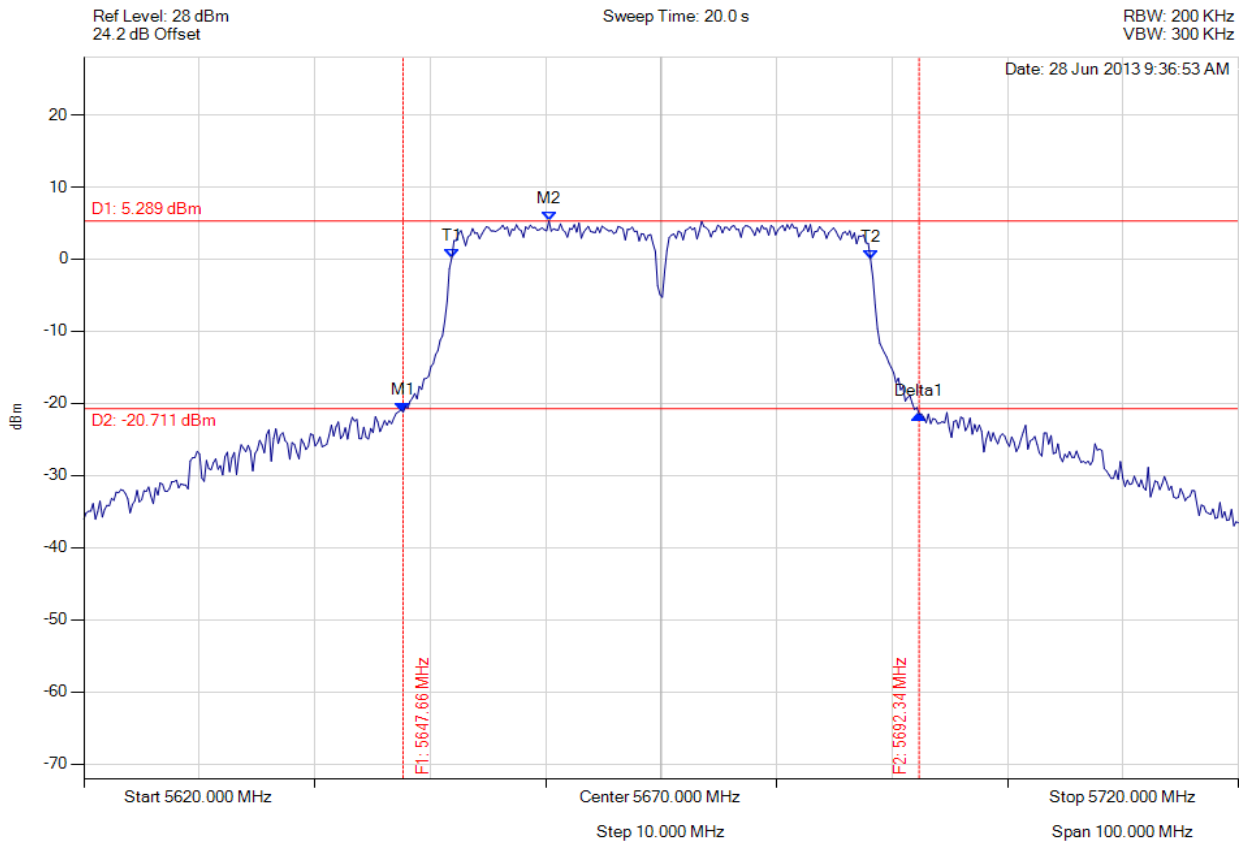

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5647.655 MHz : -21.231 dBm M2 : 5660.281 MHz : 5.289 dBm Delta1 : 44.689 MHz : -0.244 dB T1 : 5651.864 MHz : 0.197 dBm T2 : 5688.136 MHz : -0.047 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 44.689 MHz Measured 99% Bandwidth: 36.273 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 138 of 179



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5670.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

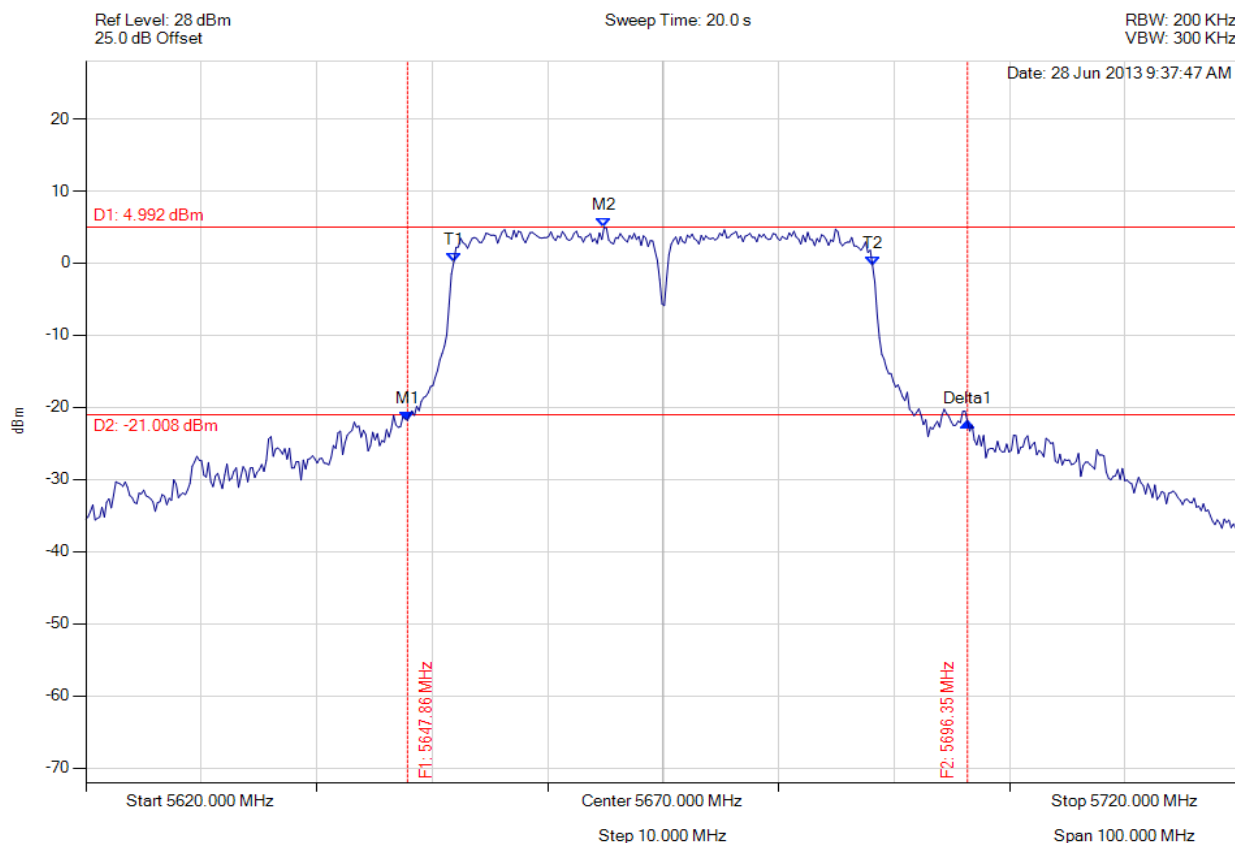

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5647.856 MHz : -21.843 dBm M2 : 5664.890 MHz : 4.992 dBm Delta1 : 48.497 MHz : -0.124 dB T1 : 5651.864 MHz : 0.154 dBm T2 : 5688.136 MHz : -0.348 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 48.497 MHz Measured 99% Bandwidth: 36.273 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




A.1.2. Peak Power Spectral Density



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5260.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

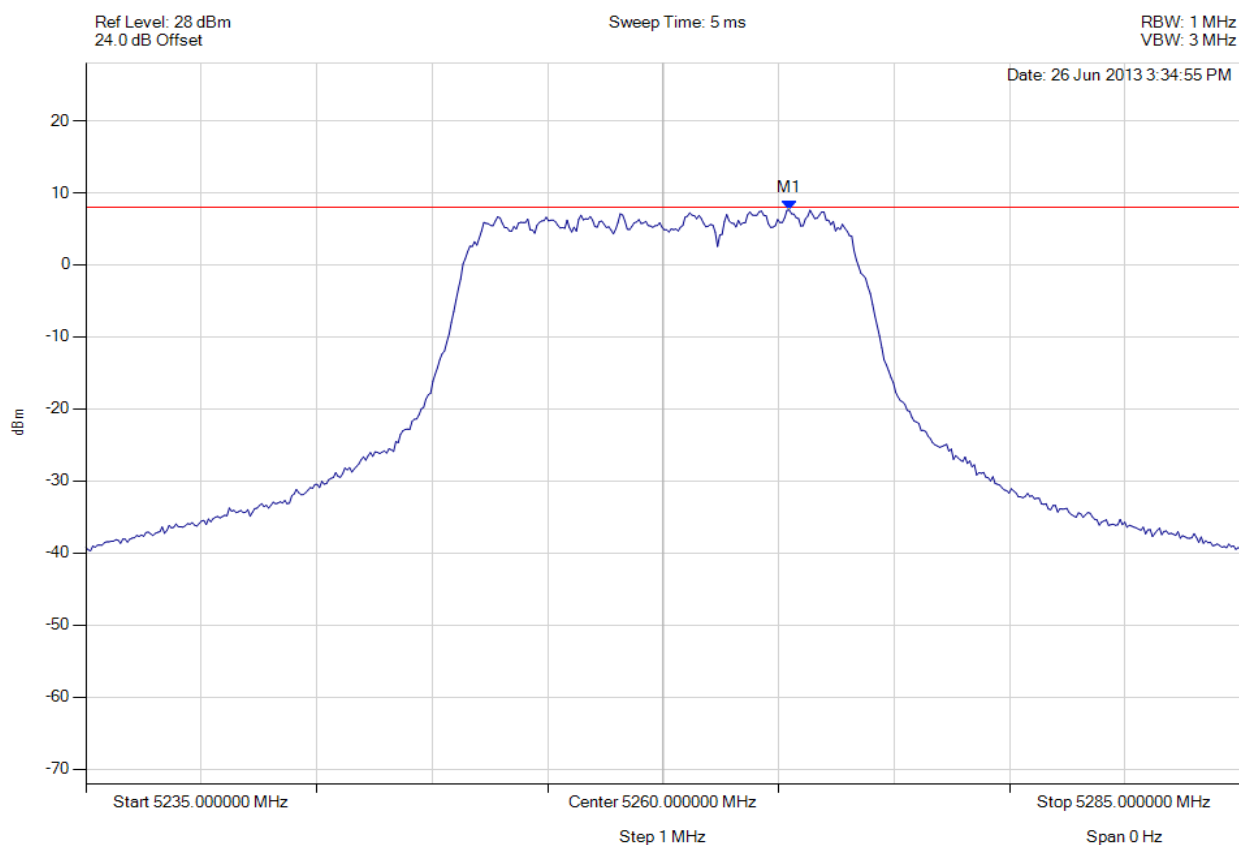

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5265.461 MHz : 7.615 dBm	Limit: ≤ 7.990 dBm Margin: -0.38 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 140 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5260.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

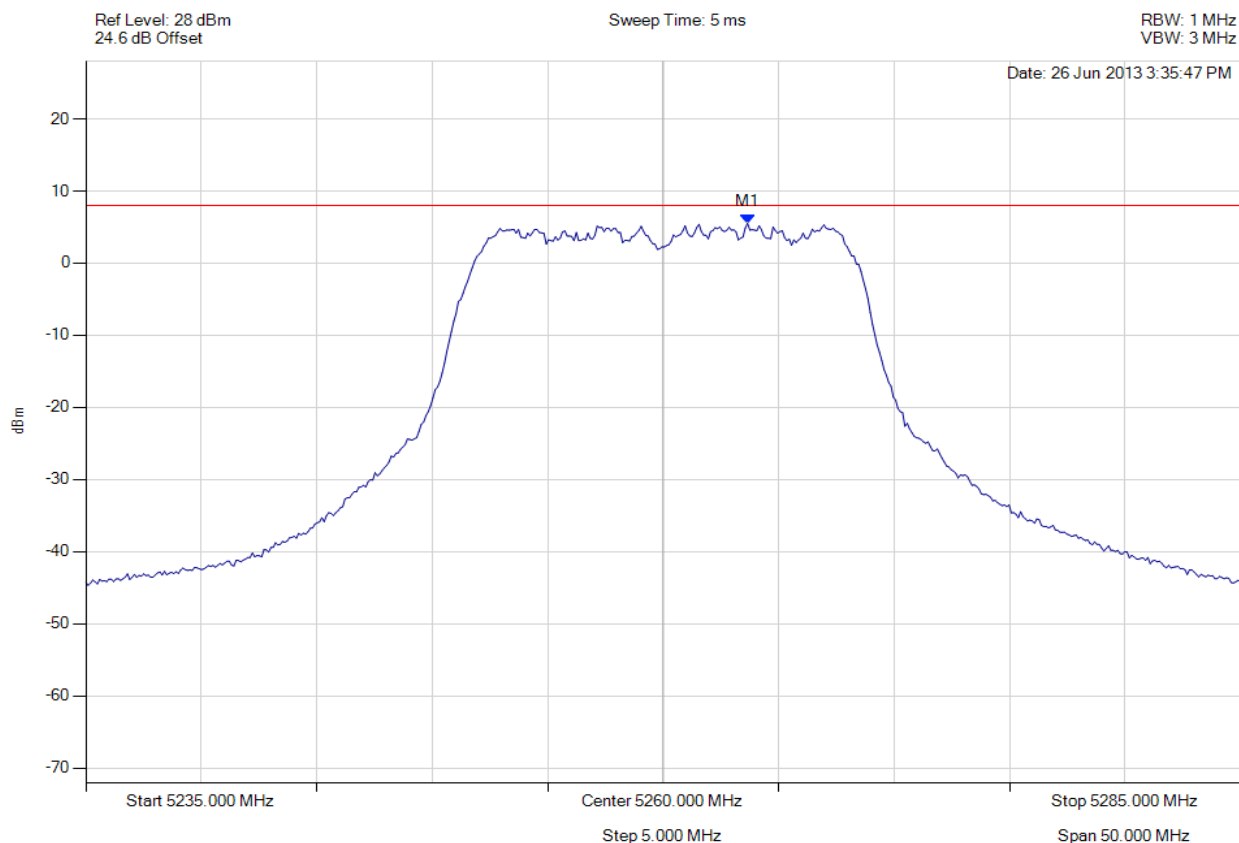

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5263.657 MHz : 5.508 dBm	Limit: ≤ 7.990 dBm Margin: -2.48 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 141 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5300.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

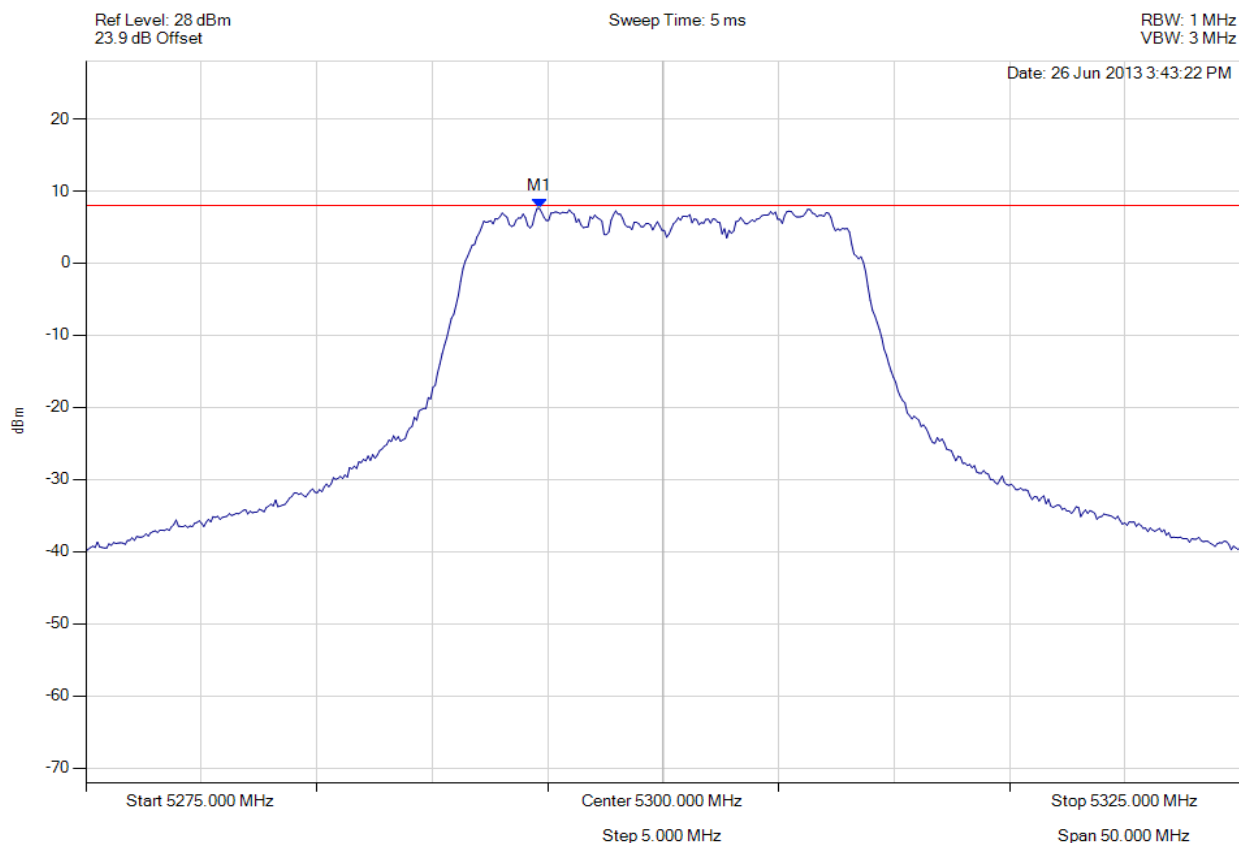

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5294.639 MHz : 7.582 dBm	Limit: ≤ 7.990 dBm Margin: -0.41 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 142 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5300.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

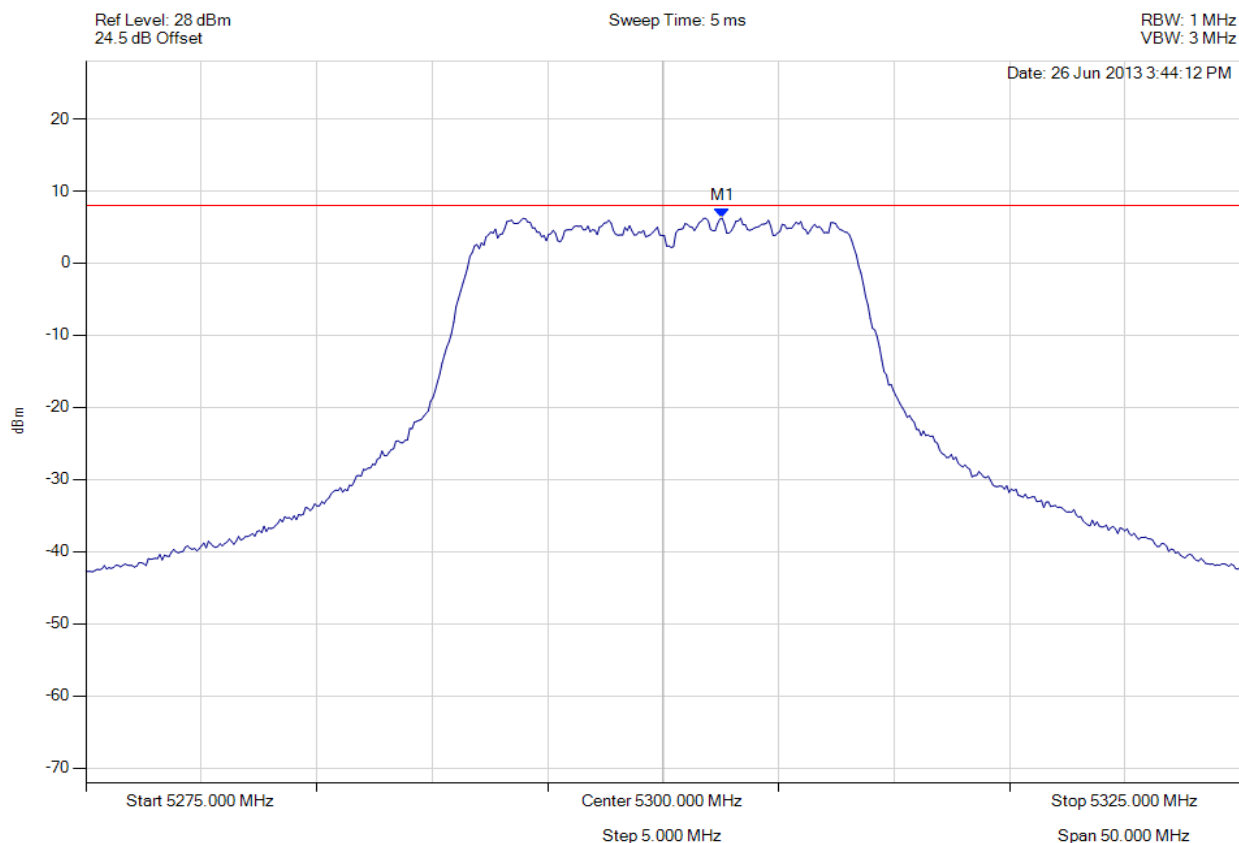

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5302.555 MHz : 6.240 dBm	Limit: ≤ 7.990 dBm Margin: -1.75 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 143 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5320.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

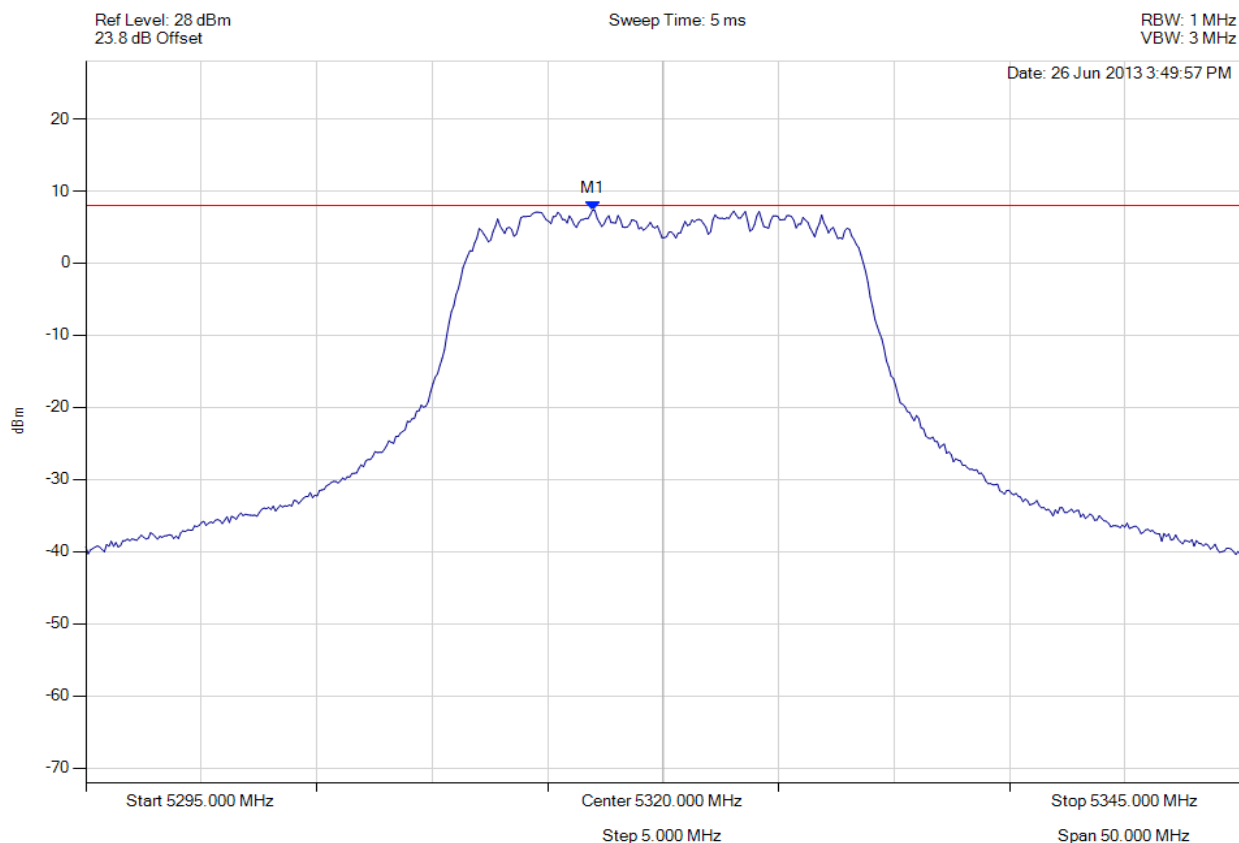

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5316.944 MHz : 7.365 dBm	Limit: ≤ 7.990 dBm Margin: -0.63 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 144 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5320.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

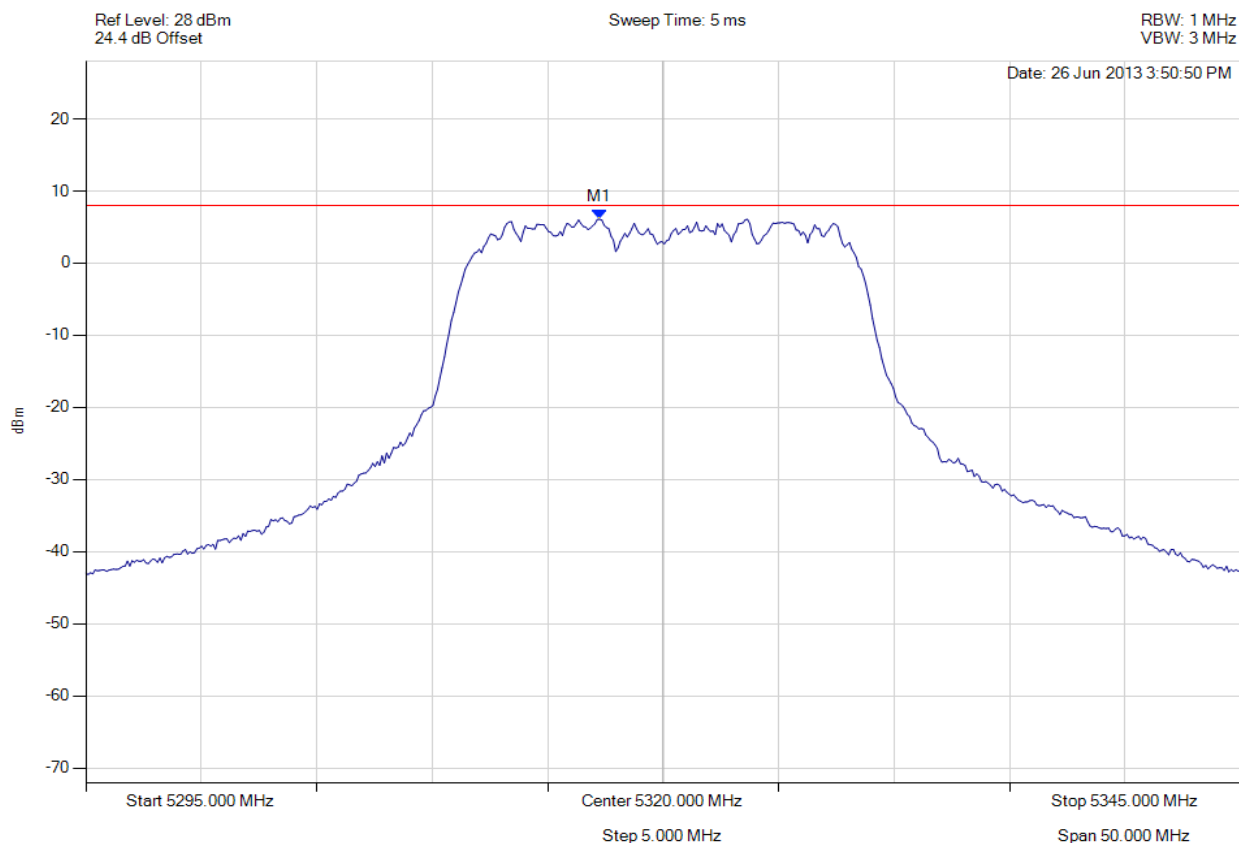

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5317.244 MHz : 6.073 dBm	Limit: ≤ 7.990 dBm Margin: -1.92 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 145 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

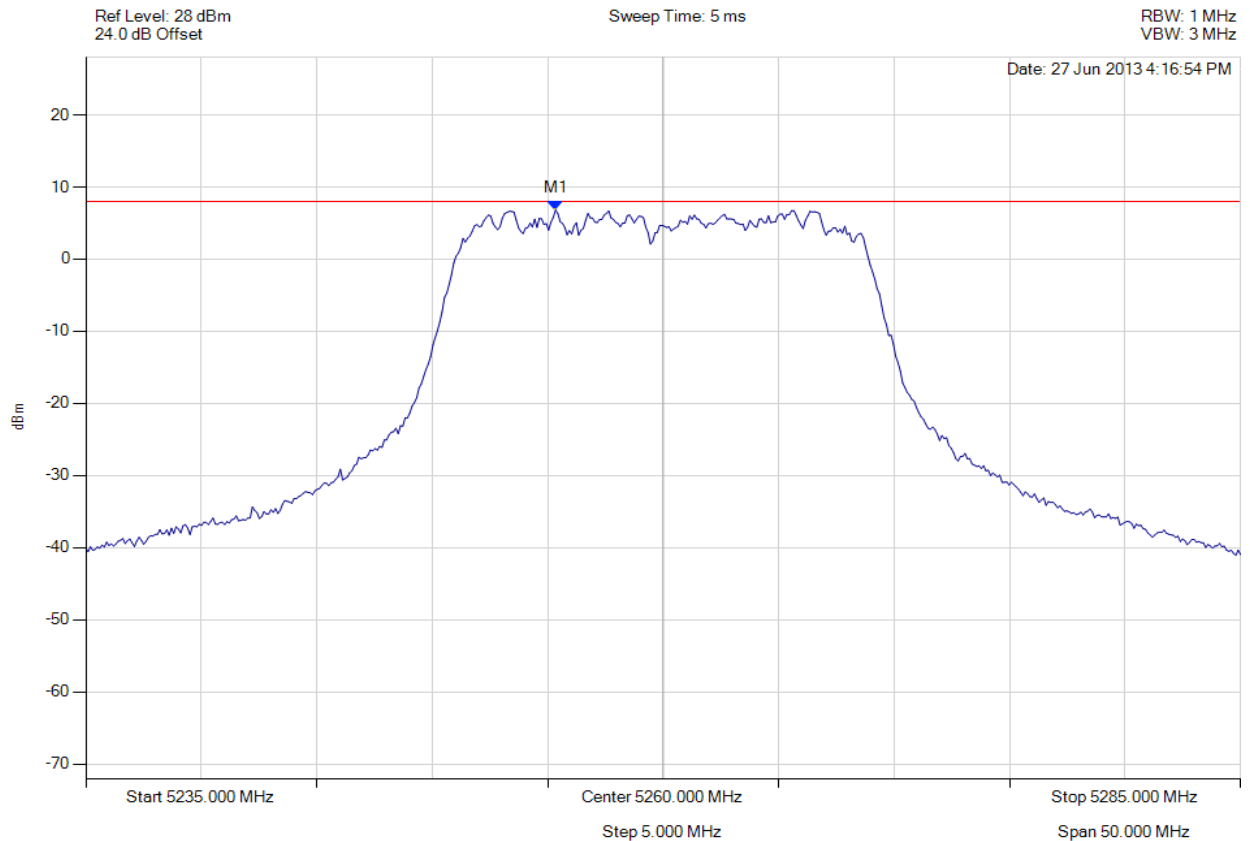

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5255.341 MHz : 6.811 dBm	Limit: ≤ 7.990 dBm Margin: -1.18 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 146 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

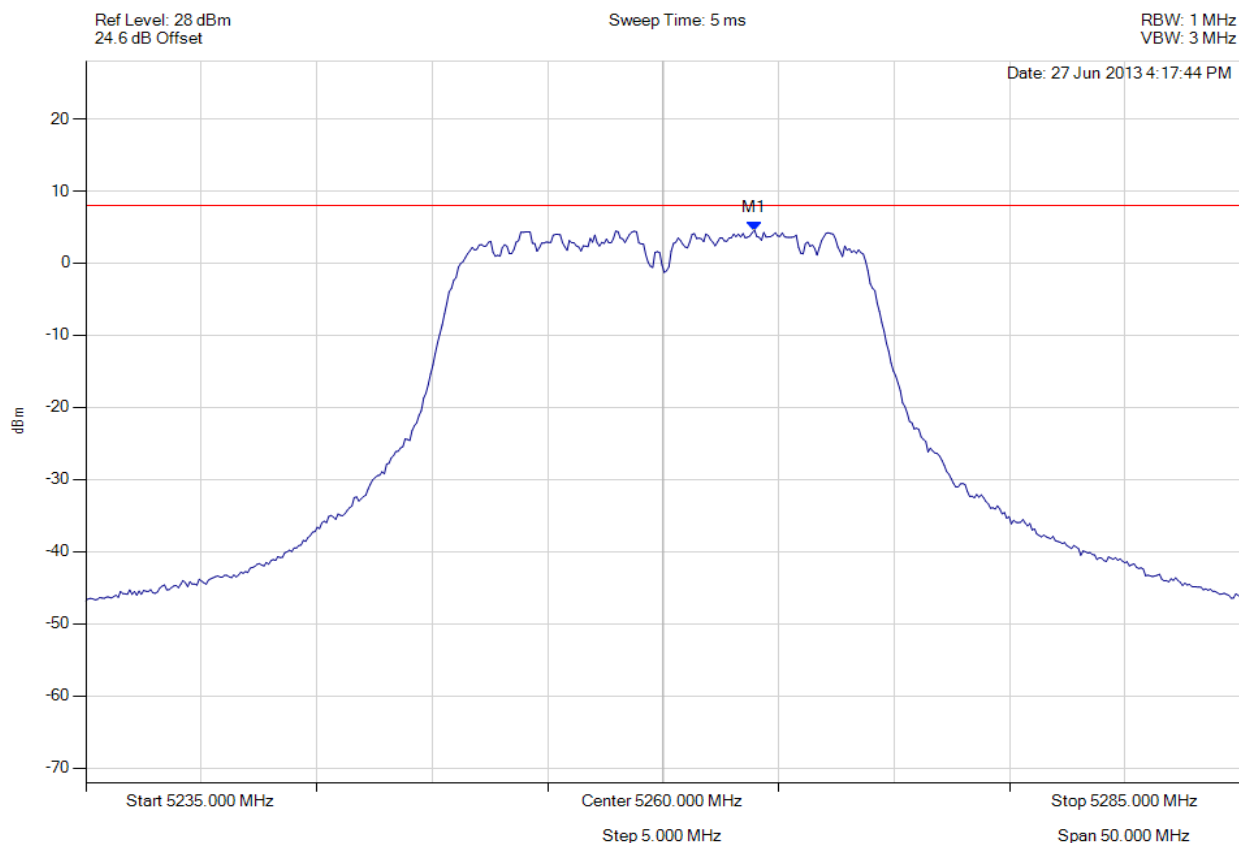

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5263.958 MHz : 4.550 dBm	Limit: ≤ 7.990 dBm Margin: -3.44 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 147 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

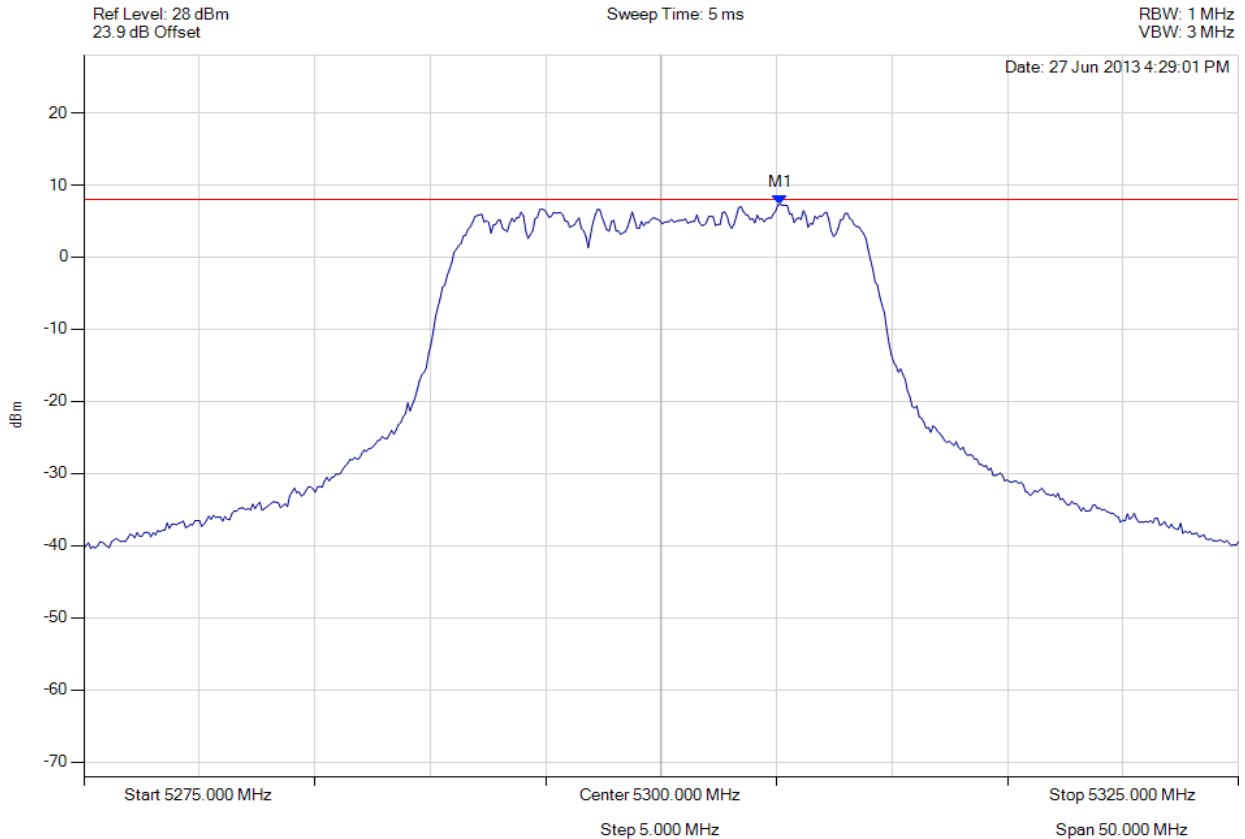

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5305.160 MHz : 7.309 dBm	Limit: ≤ 7.990 dBm Margin: -0.68 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 148 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

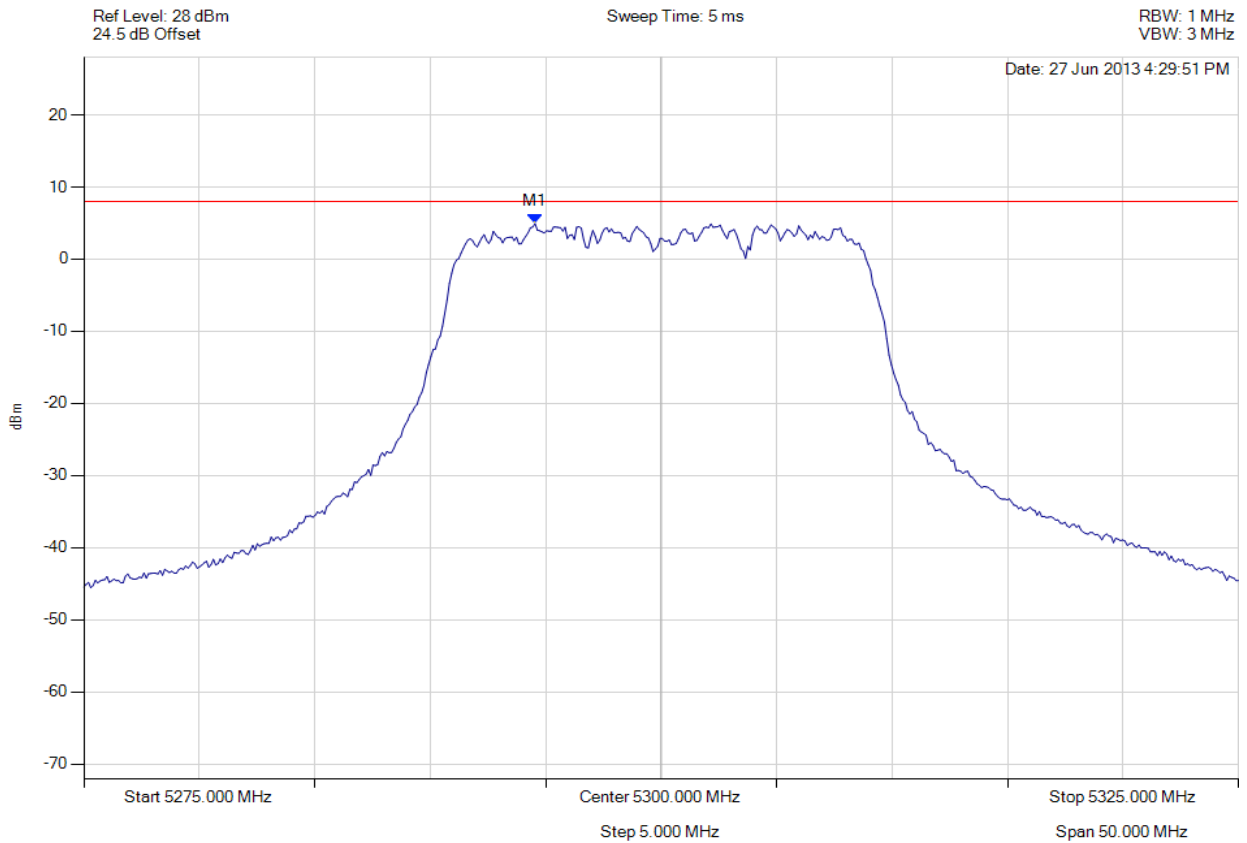

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5294.539 MHz : 4.925 dBm	Limit: ≤ 7.990 dBm Margin: -3.07 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 149 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

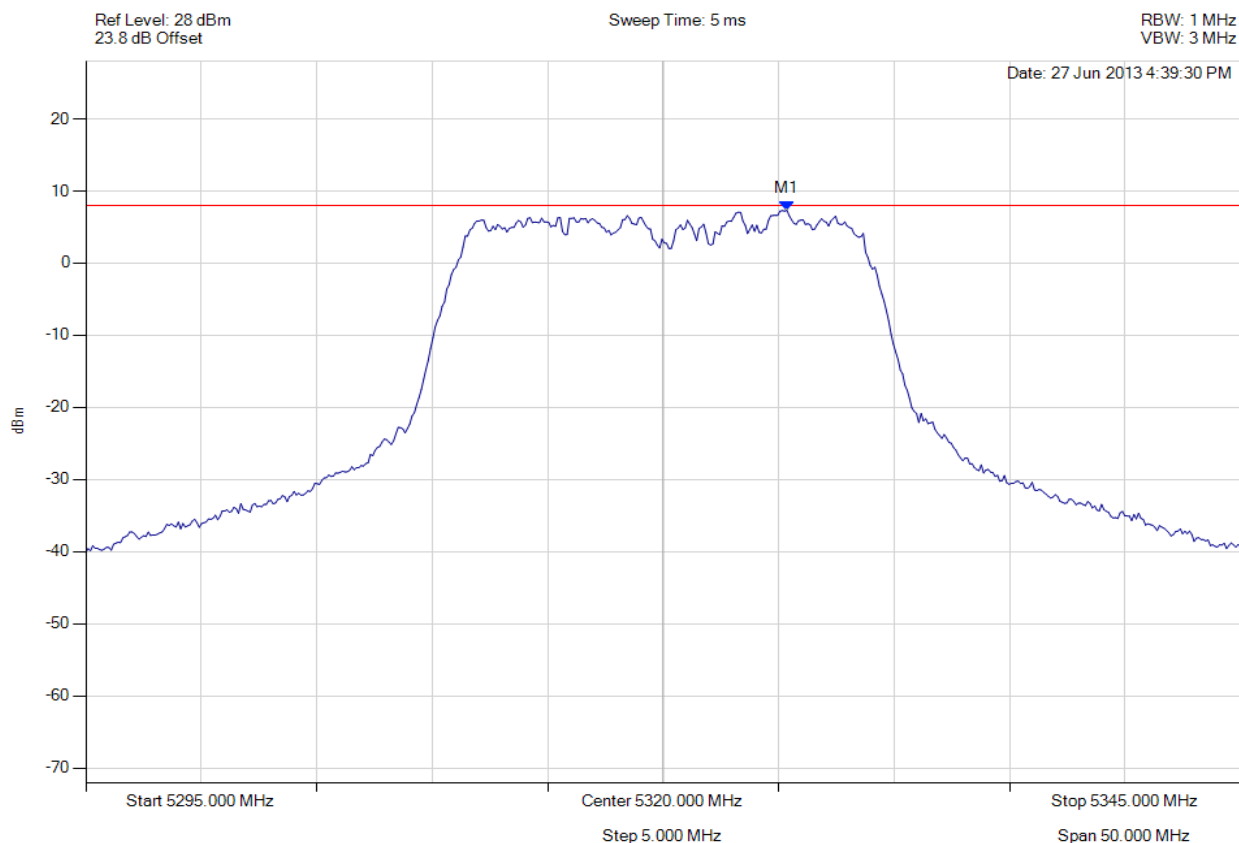

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5325.361 MHz : 7.320 dBm	Limit: ≤ 7.990 dBm Margin: -0.67 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 150 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

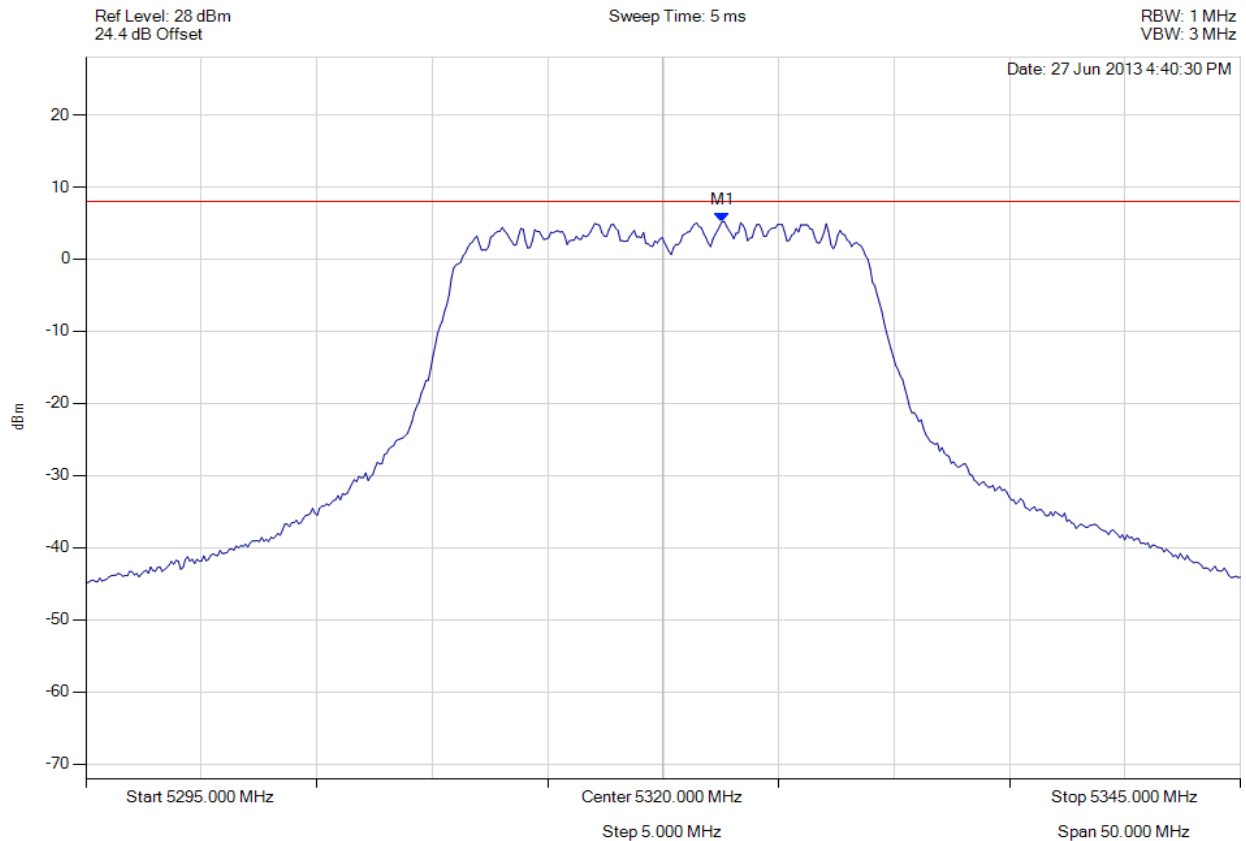

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5322.555 MHz : 5.200 dBm	Limit: ≤ 7.990 dBm Margin: -2.79 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 151 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

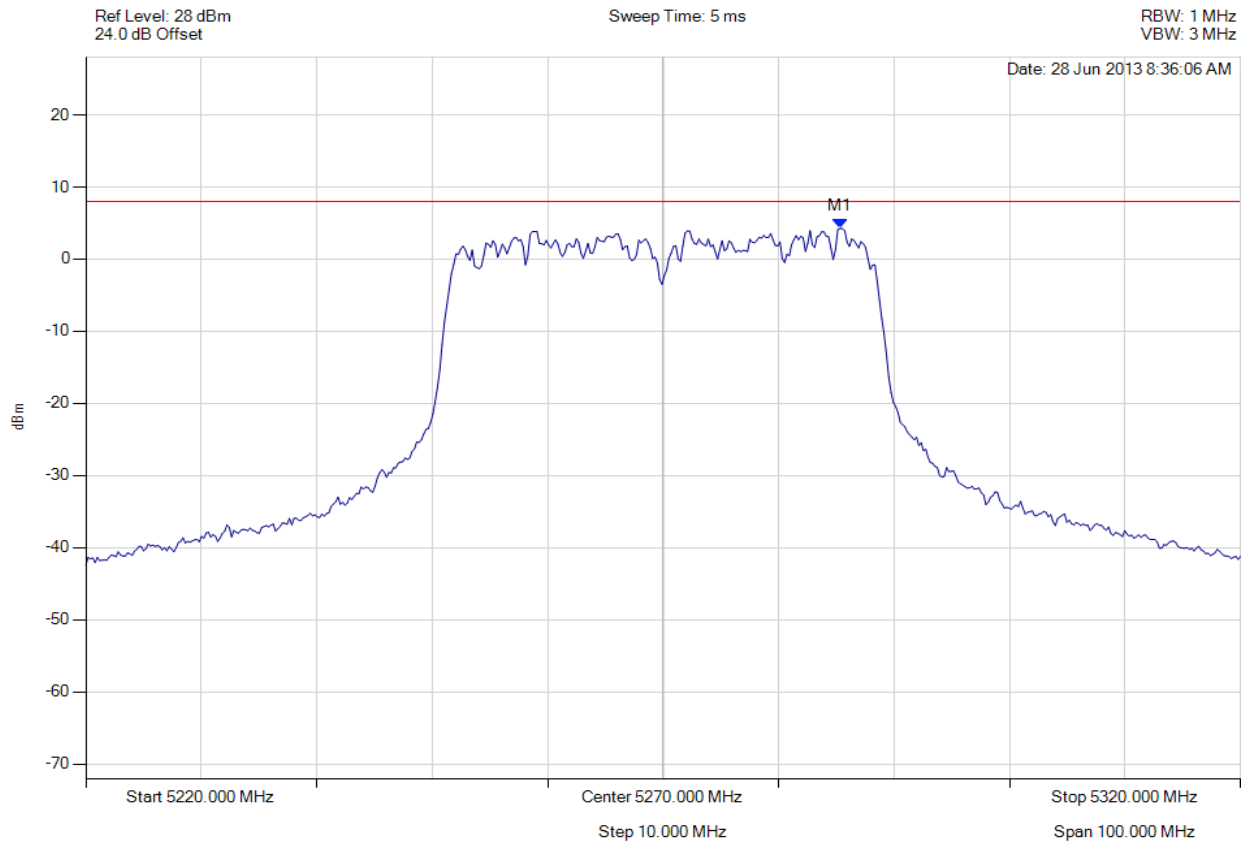

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5285.331 MHz : 4.264 dBm	Limit: ≤ 7.990 dBm Margin: -3.73 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 152 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

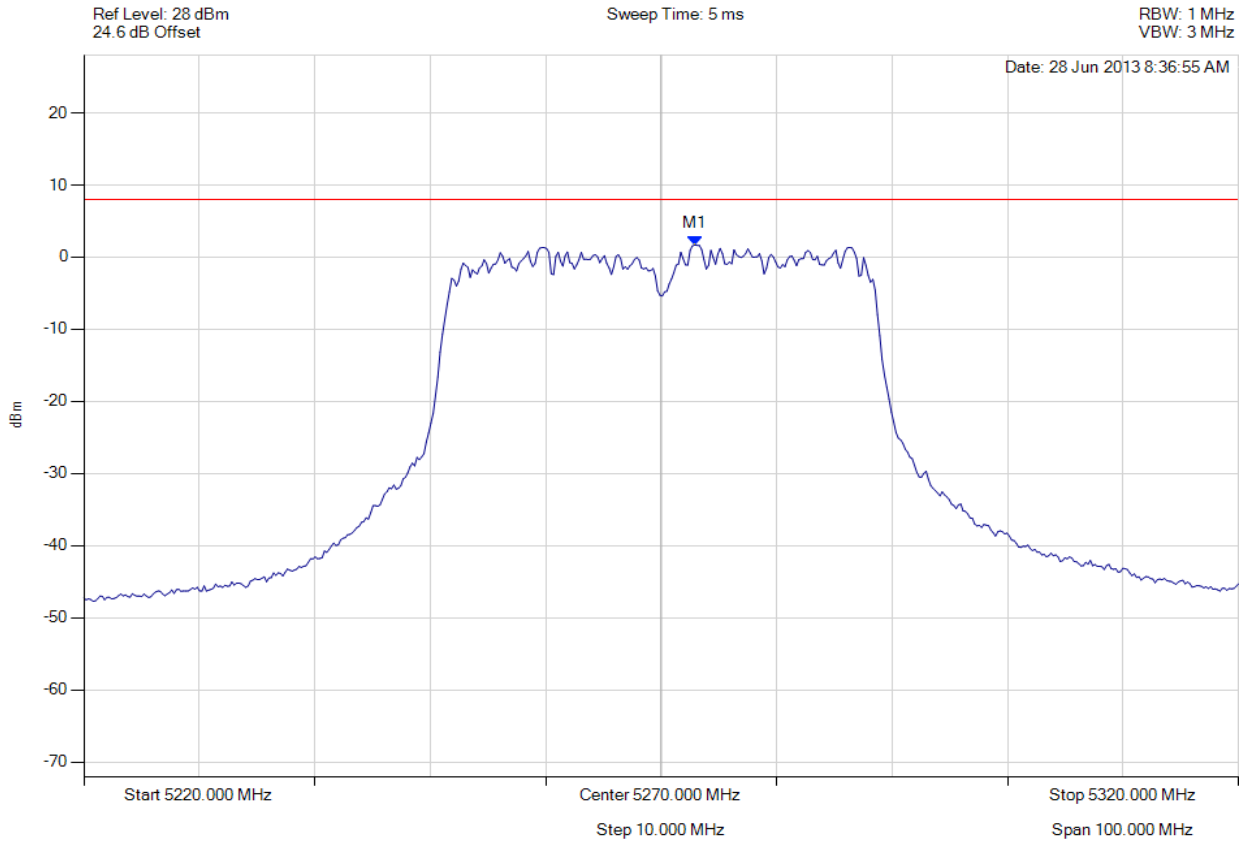

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5272.906 MHz : 1.685 dBm	Limit: ≤ 7.990 dBm Margin: -6.30 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 153 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

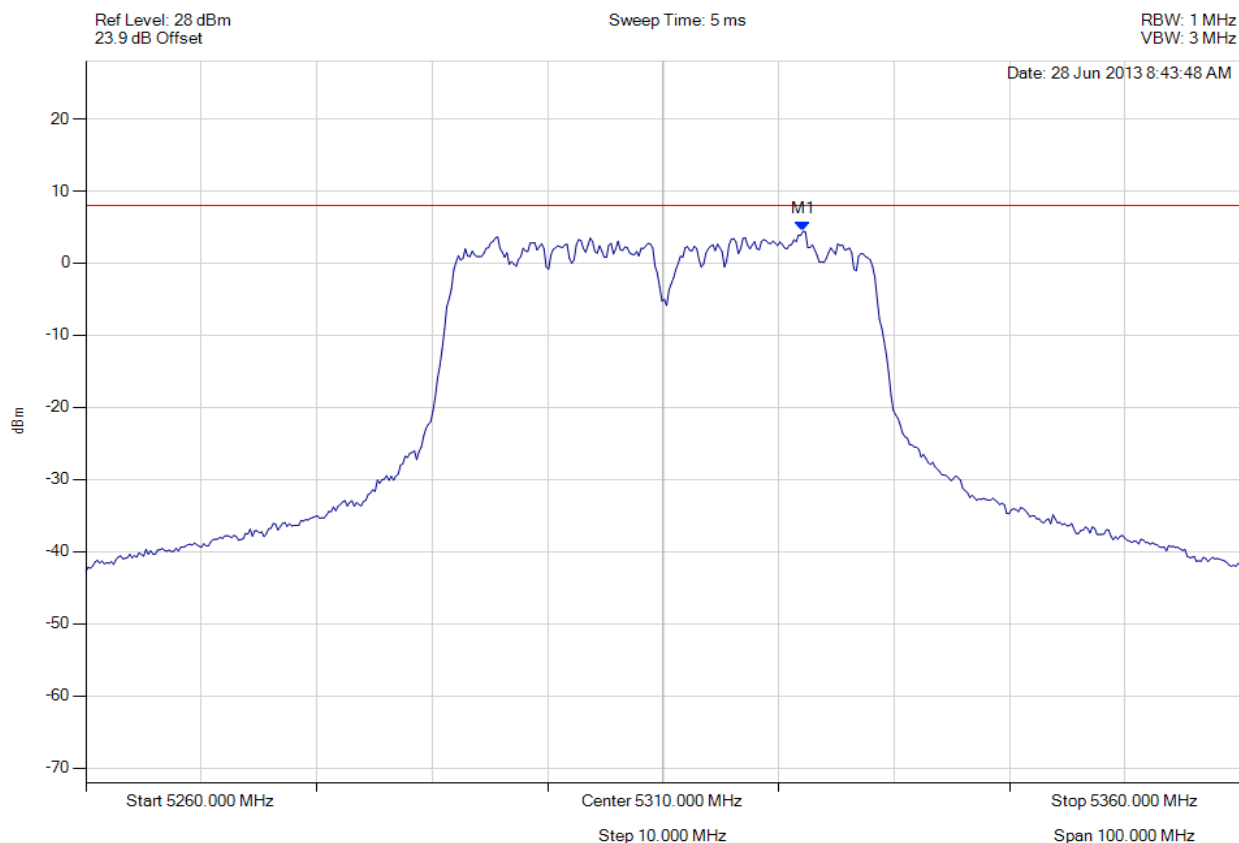

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5322.124 MHz : 4.414 dBm	Limit: ≤ 7.990 dBm Margin: -3.58 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 154 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

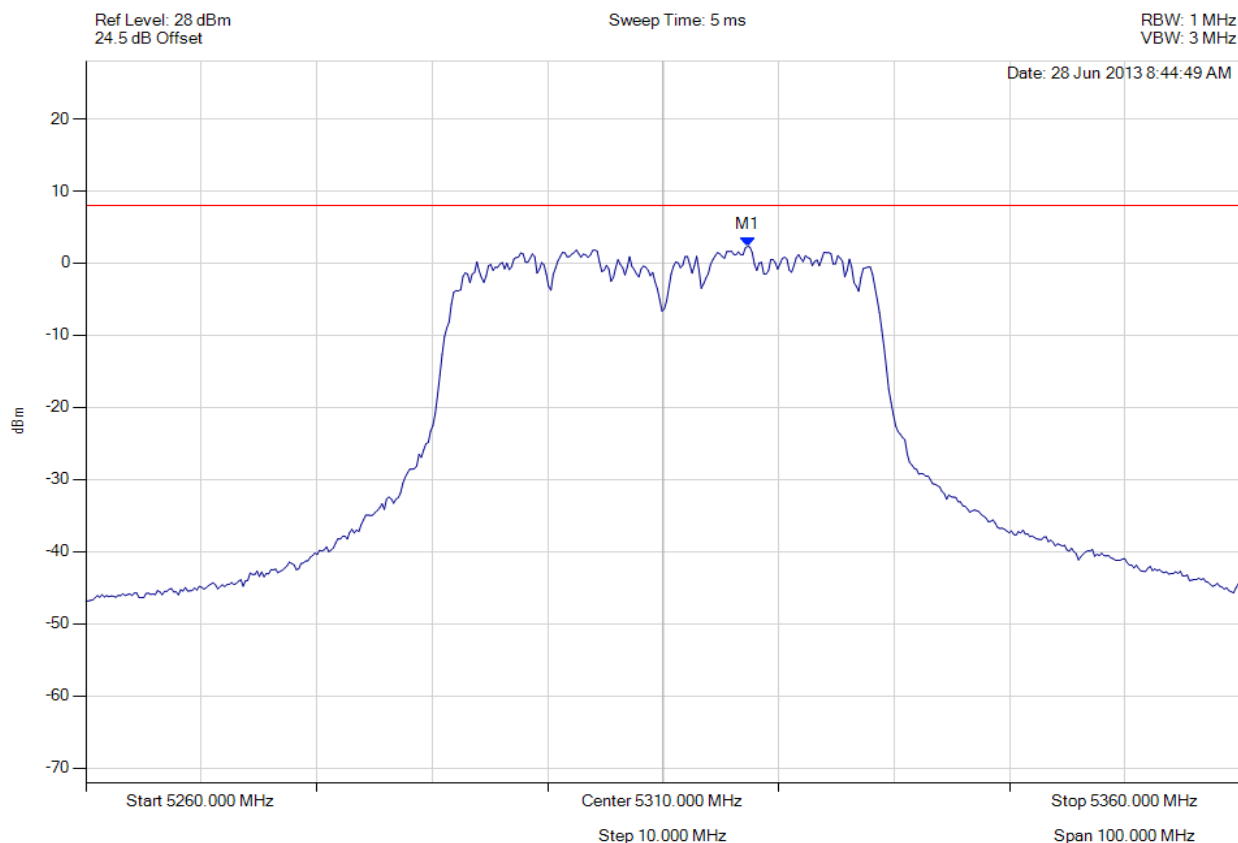

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5317.315 MHz : 2.323 dBm	Limit: ≤ 7.990 dBm Margin: -5.67 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 155 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5500.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

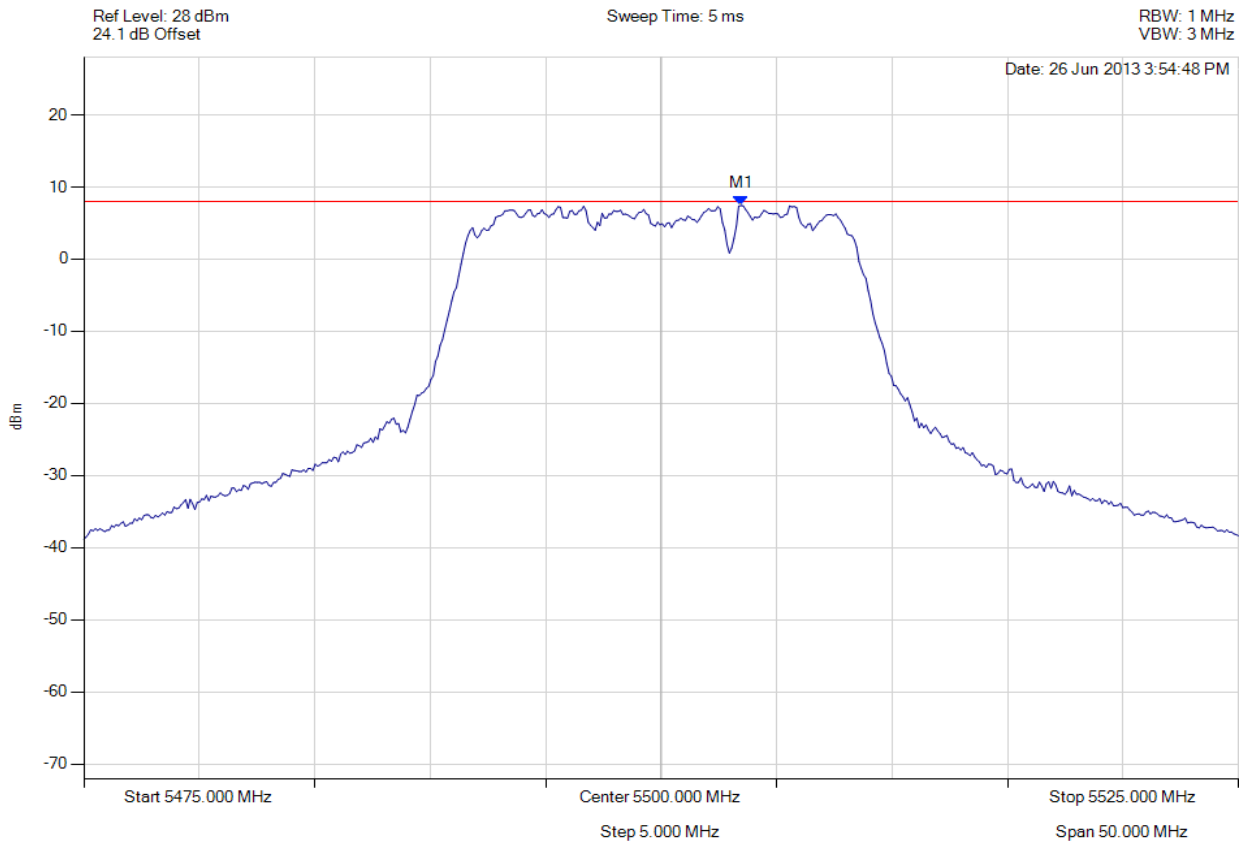

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5503.457 MHz : 7.436 dBm	Limit: ≤ 7.990 dBm Margin: -0.55 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 156 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5500.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

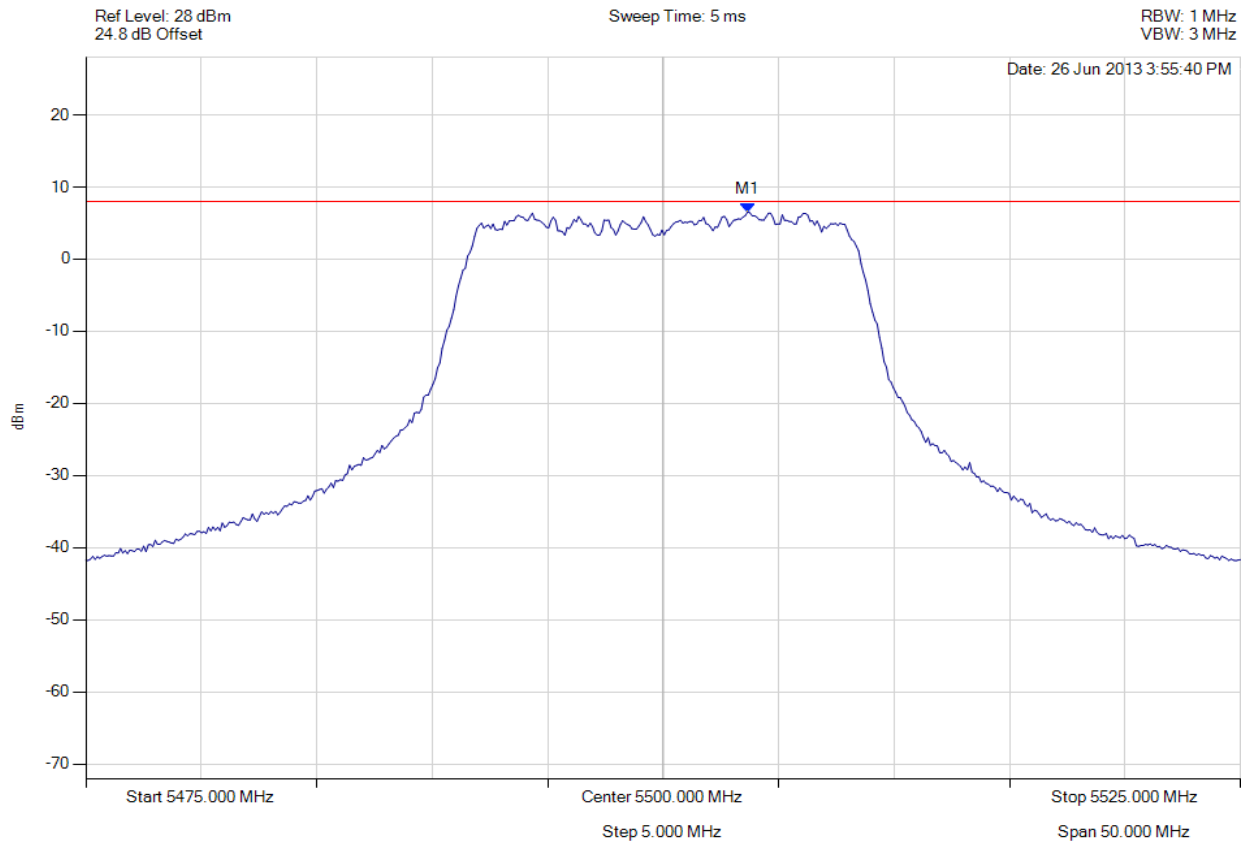

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5503.657 MHz : 6.545 dBm	Limit: ≤ 7.990 dBm Margin: -1.45 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 157 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5580.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

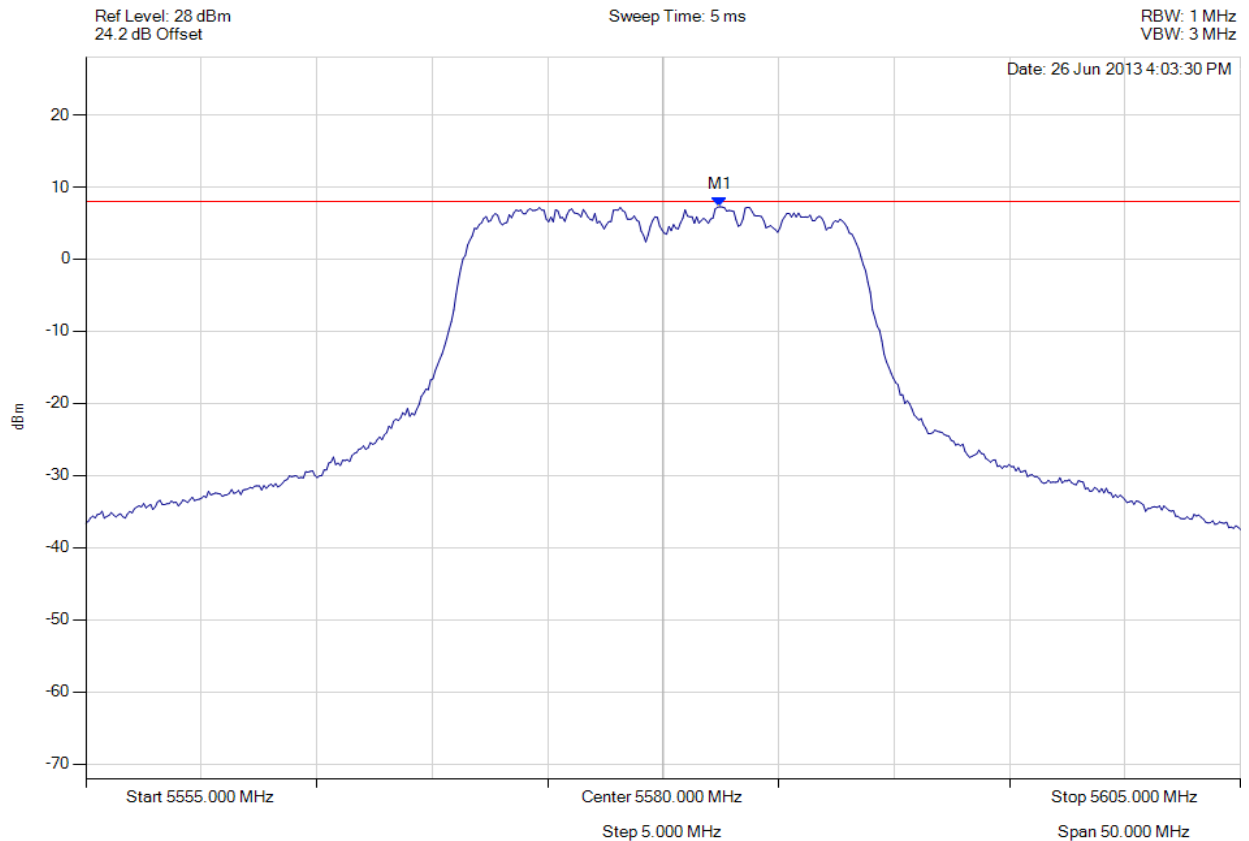

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5582.455 MHz : 7.260 dBm	Limit: ≤ 7.990 dBm Margin: -0.73 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 158 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5580.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

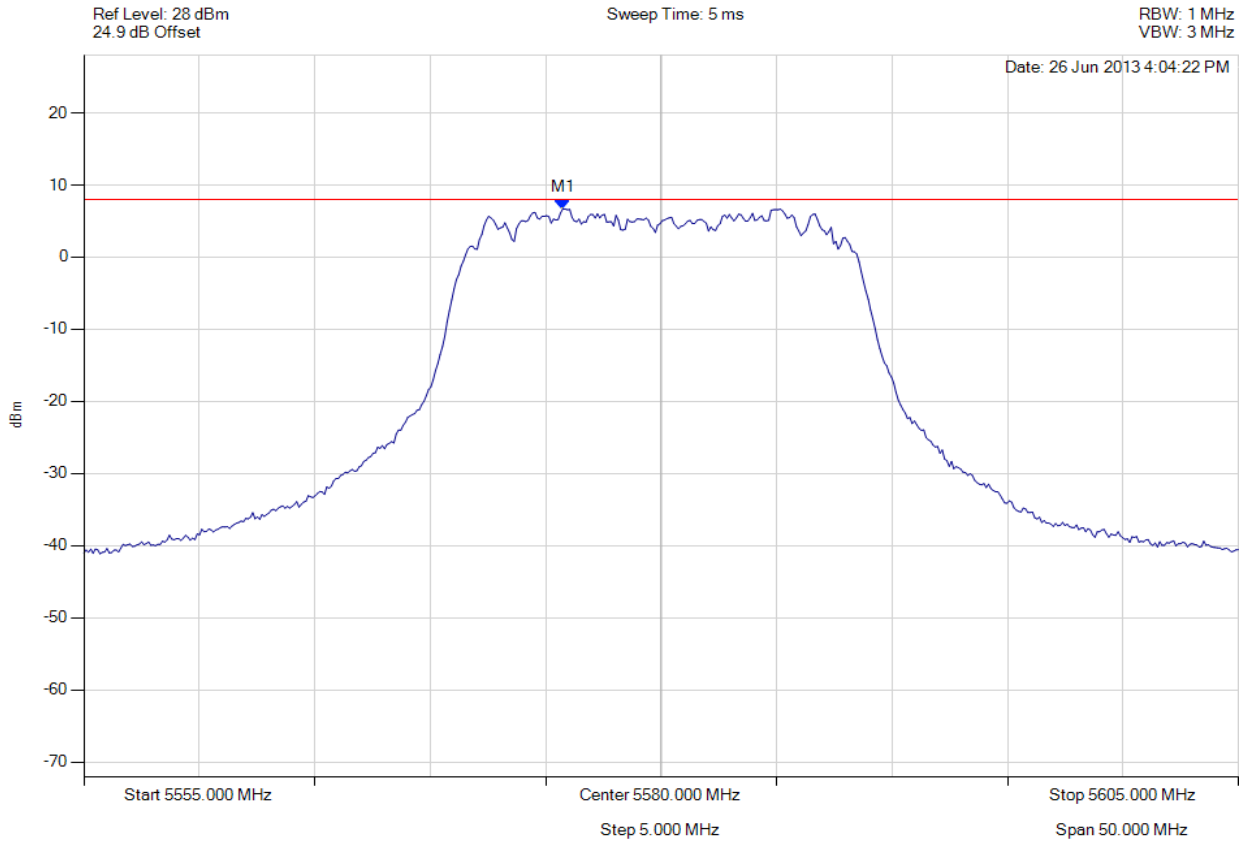

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5575.741 MHz : 6.686 dBm	Limit: ≤ 7.990 dBm Margin: -1.30 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 159 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5700.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

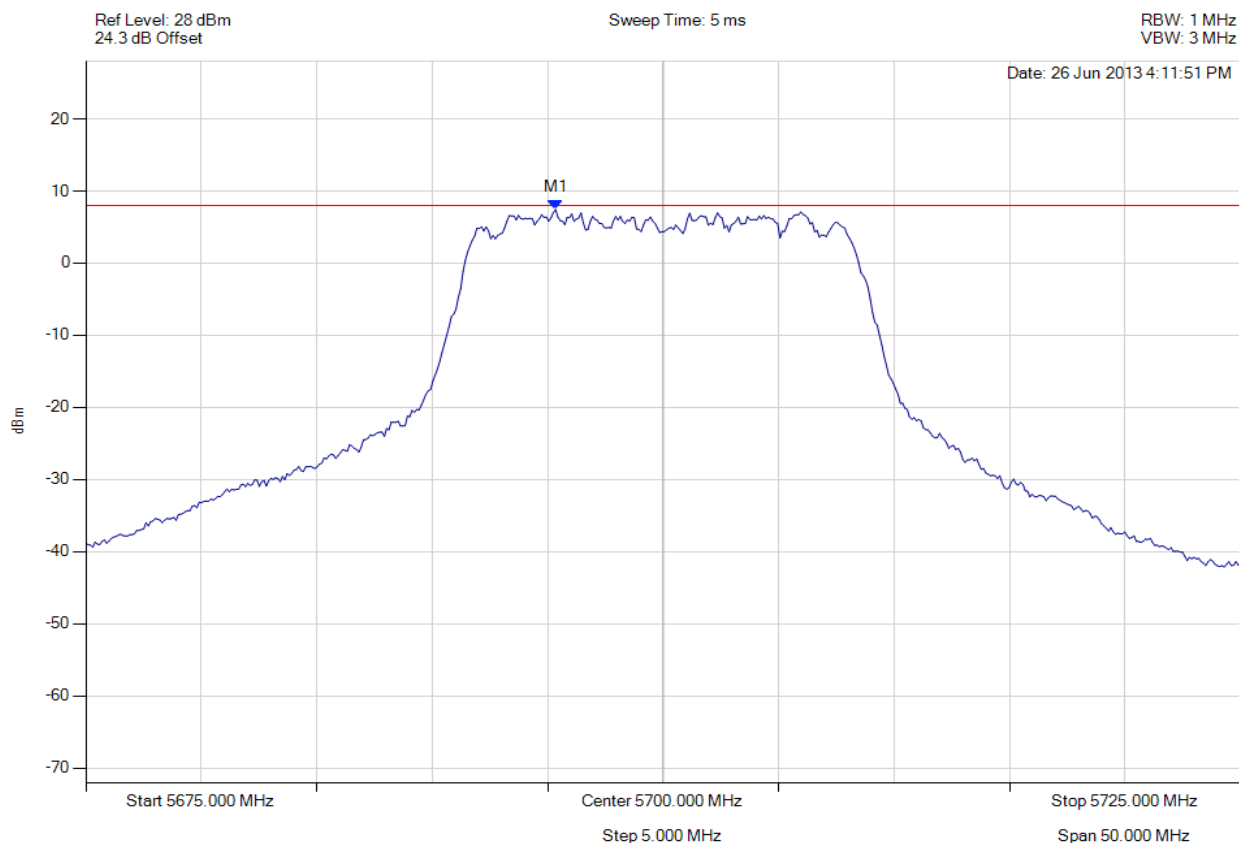

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5695.341 MHz : 7.426 dBm	Limit: ≤ 7.990 dBm Margin: -0.56 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 160 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5700.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

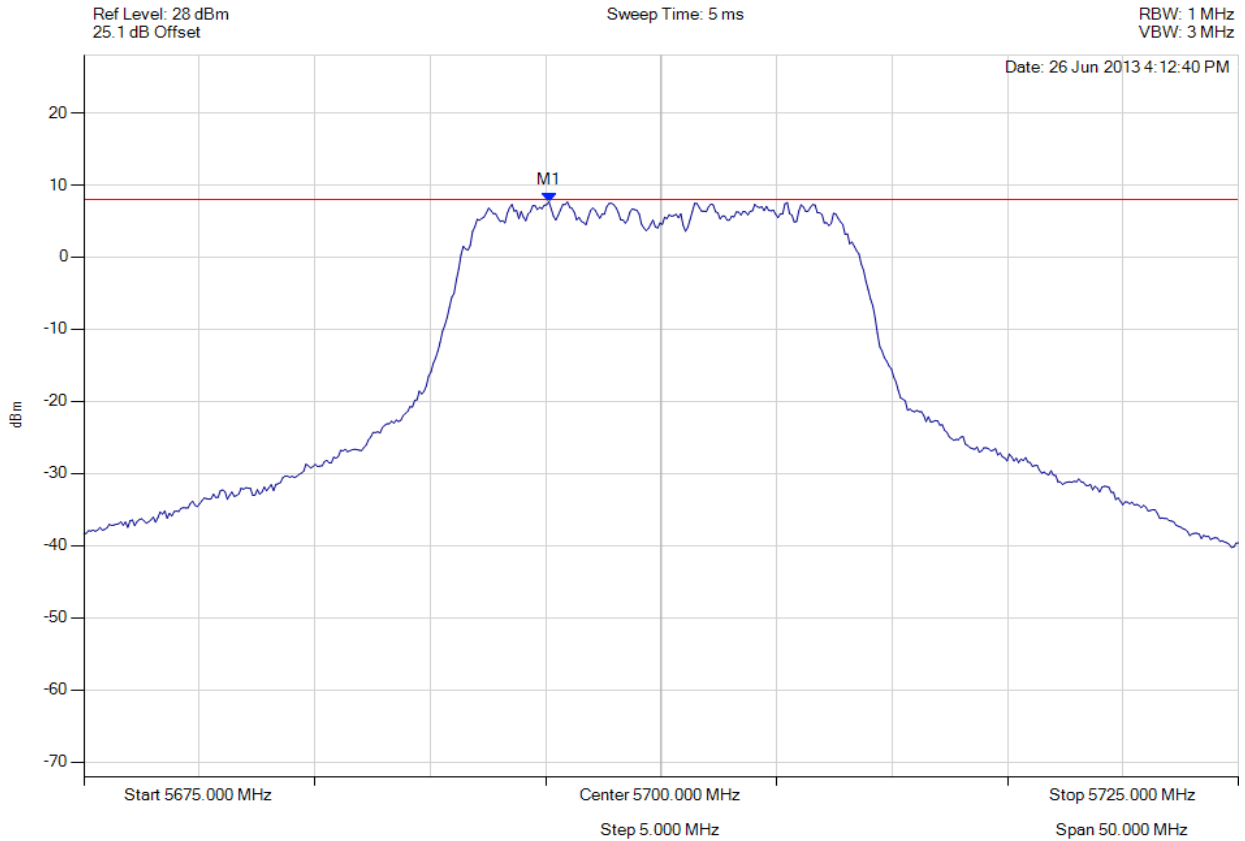

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5695.140 MHz : 7.687 dBm	Limit: ≤ 7.990 dBm Margin: -0.30 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 161 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

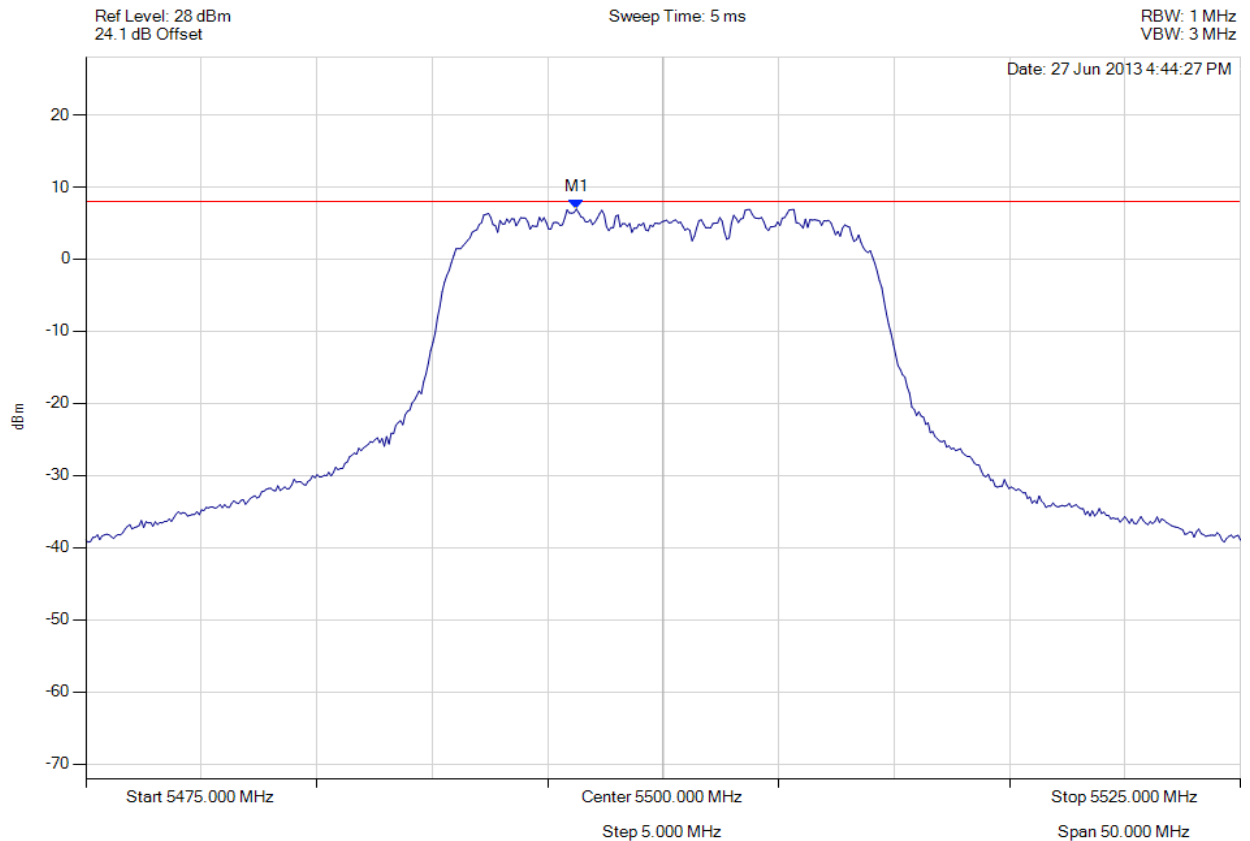

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5496.242 MHz : 6.944 dBm	Limit: ≤ 7.990 dBm Margin: -1.05 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 162 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

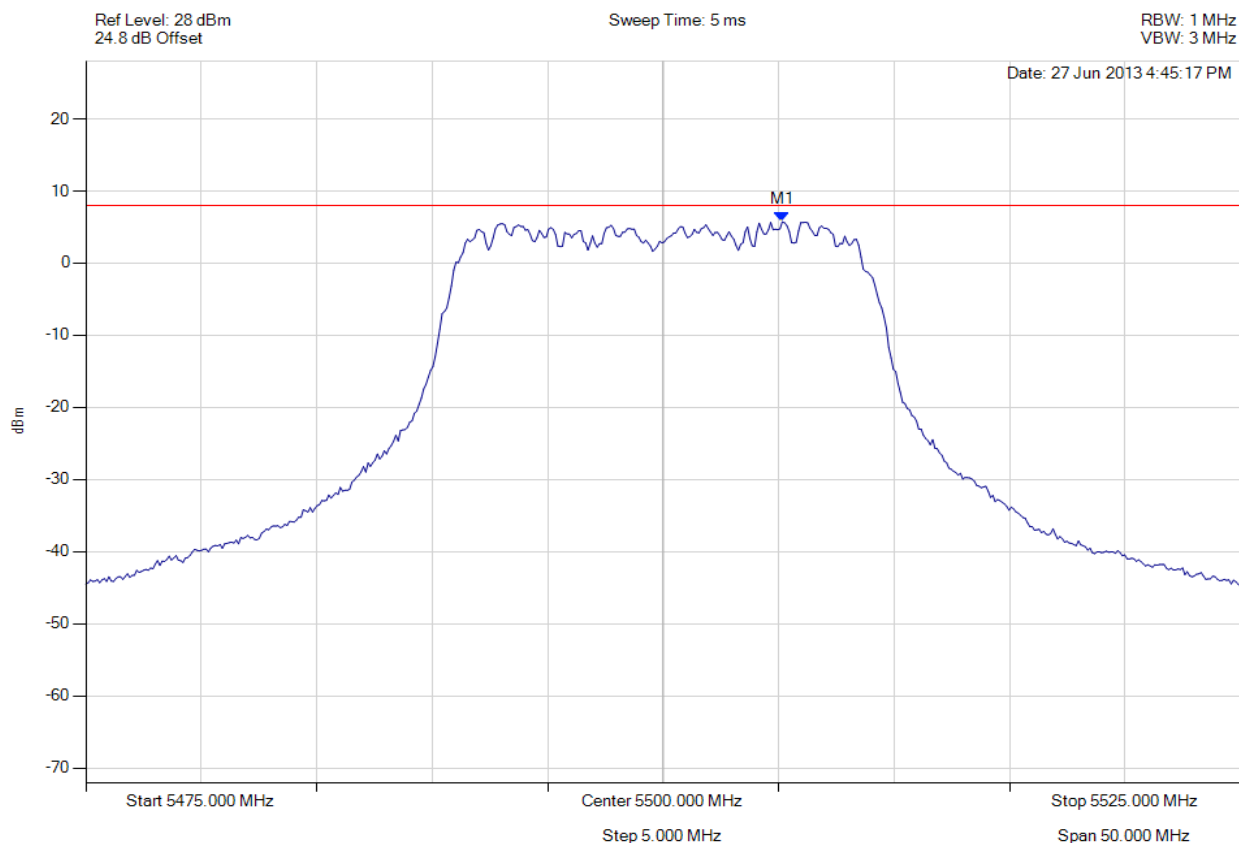

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5505.160 MHz : 5.734 dBm	Limit: ≤ 7.990 dBm Margin: -2.26 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 163 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

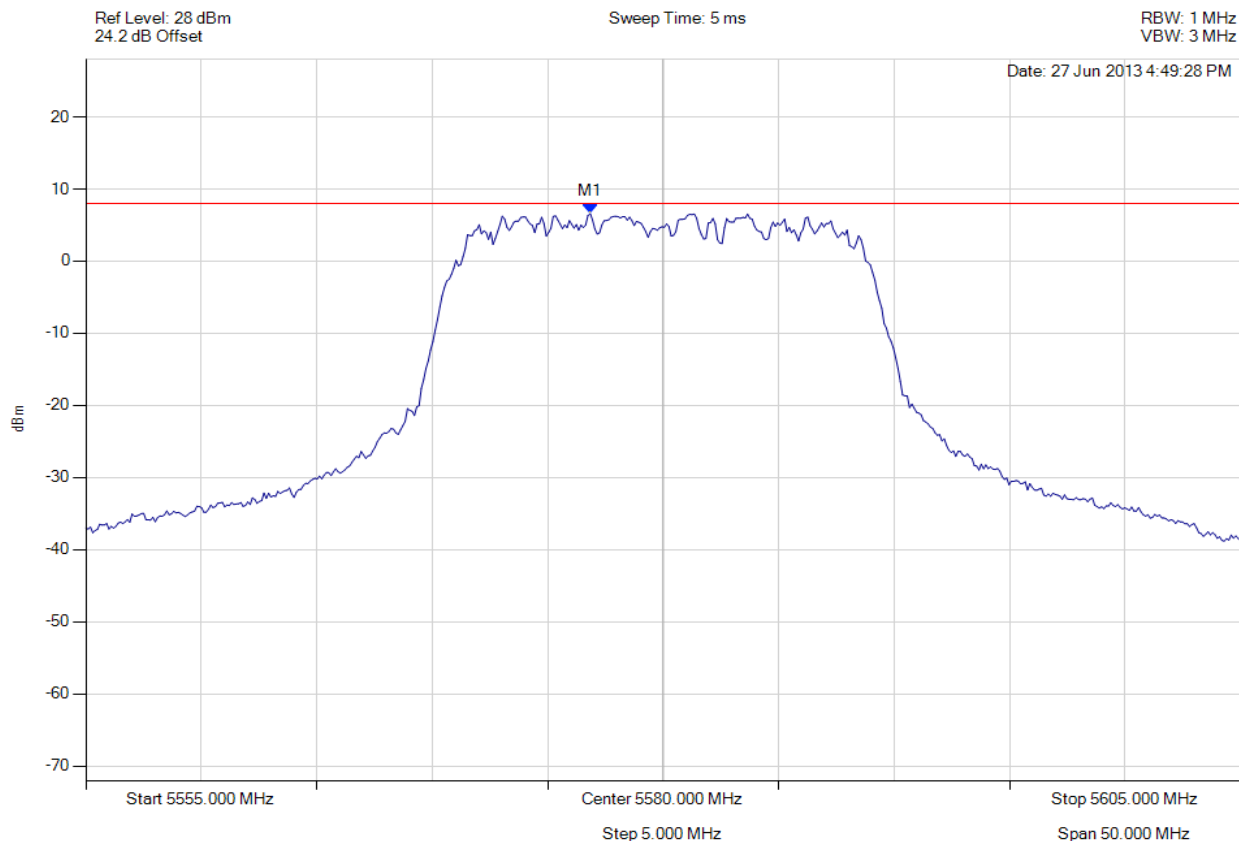

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5576.844 MHz : 6.580 dBm	Limit: ≤ 7.990 dBm Margin: -1.41 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 164 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

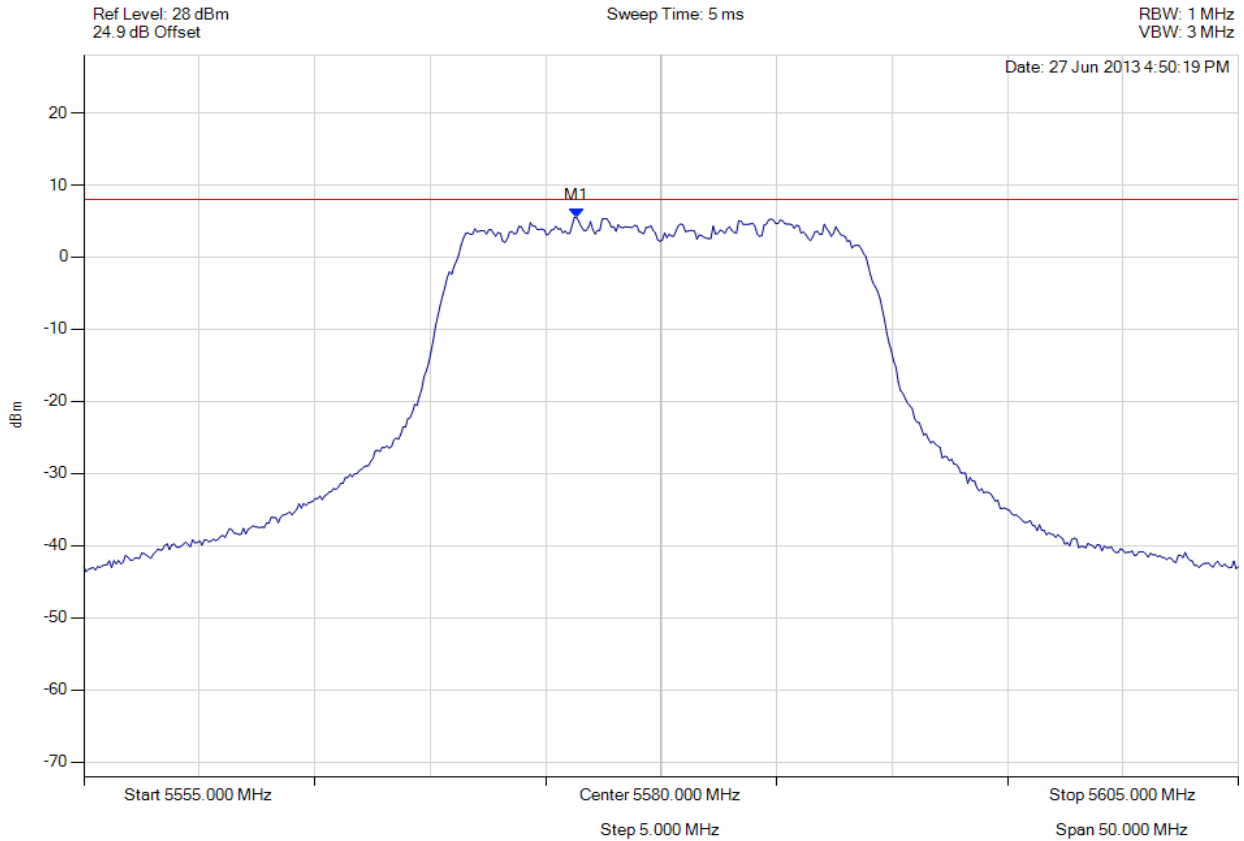

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5576.343 MHz : 5.507 dBm	Limit: ≤ 7.990 dBm Margin: -2.48 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 165 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5700.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

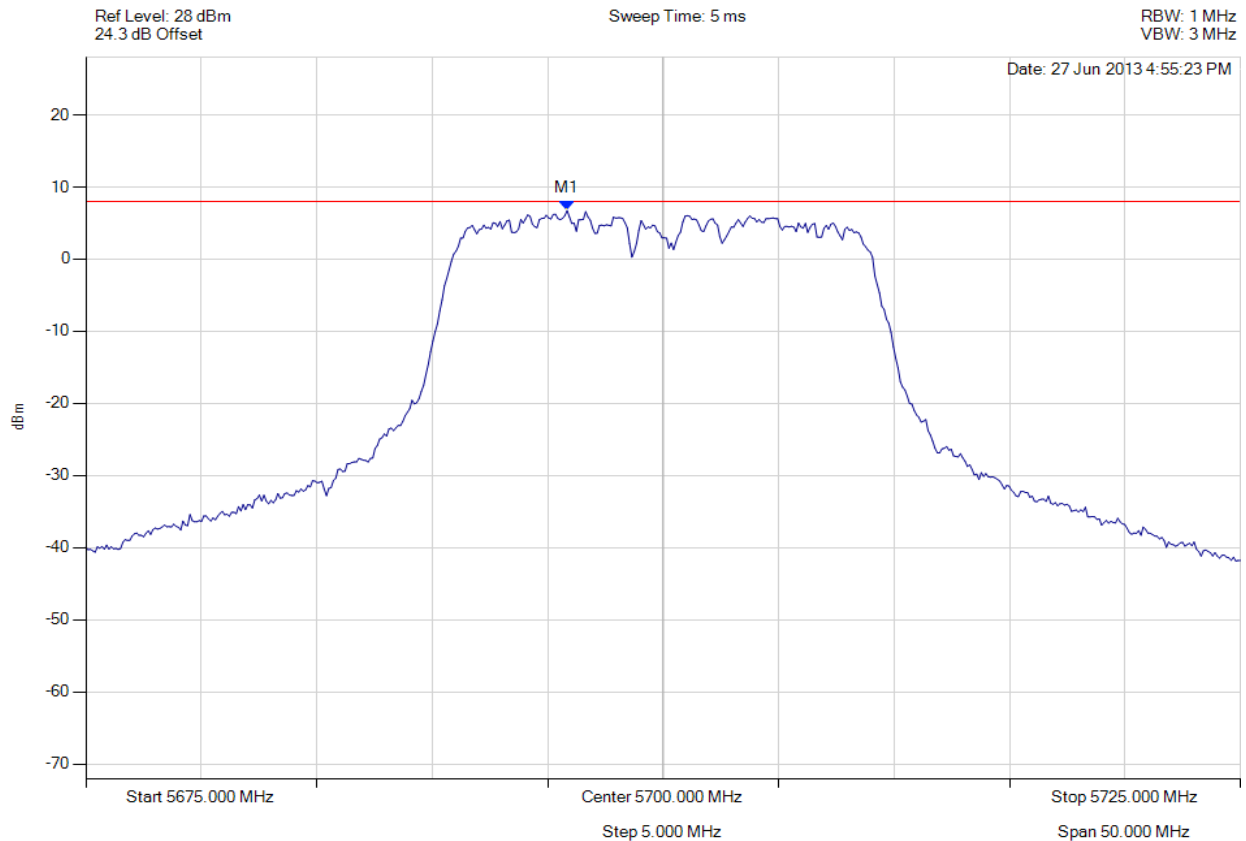

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5695.842 MHz : 6.730 dBm	Limit: ≤ 7.990 dBm Margin: -1.26 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 166 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5700.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

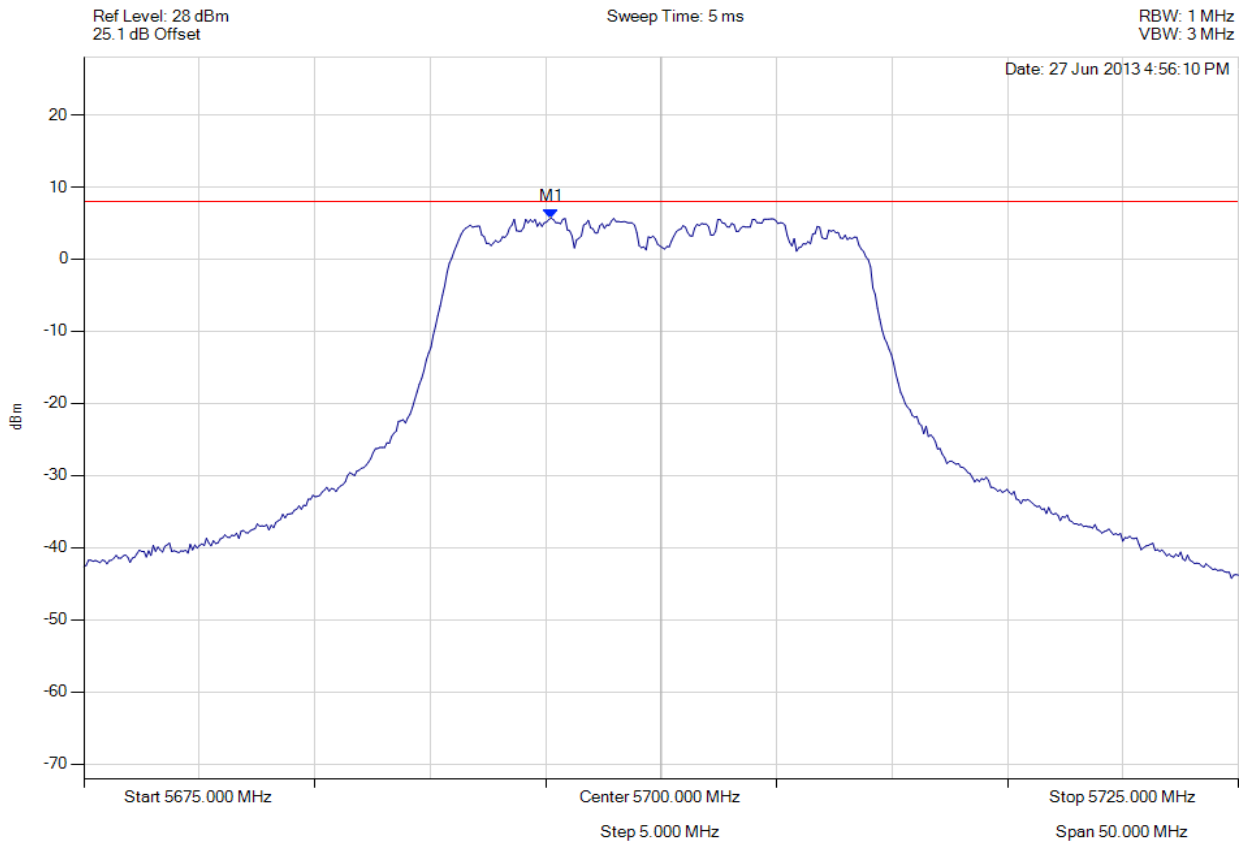

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5695.240 MHz : 5.688 dBm	Limit: ≤ 7.990 dBm Margin: -2.30 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 167 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

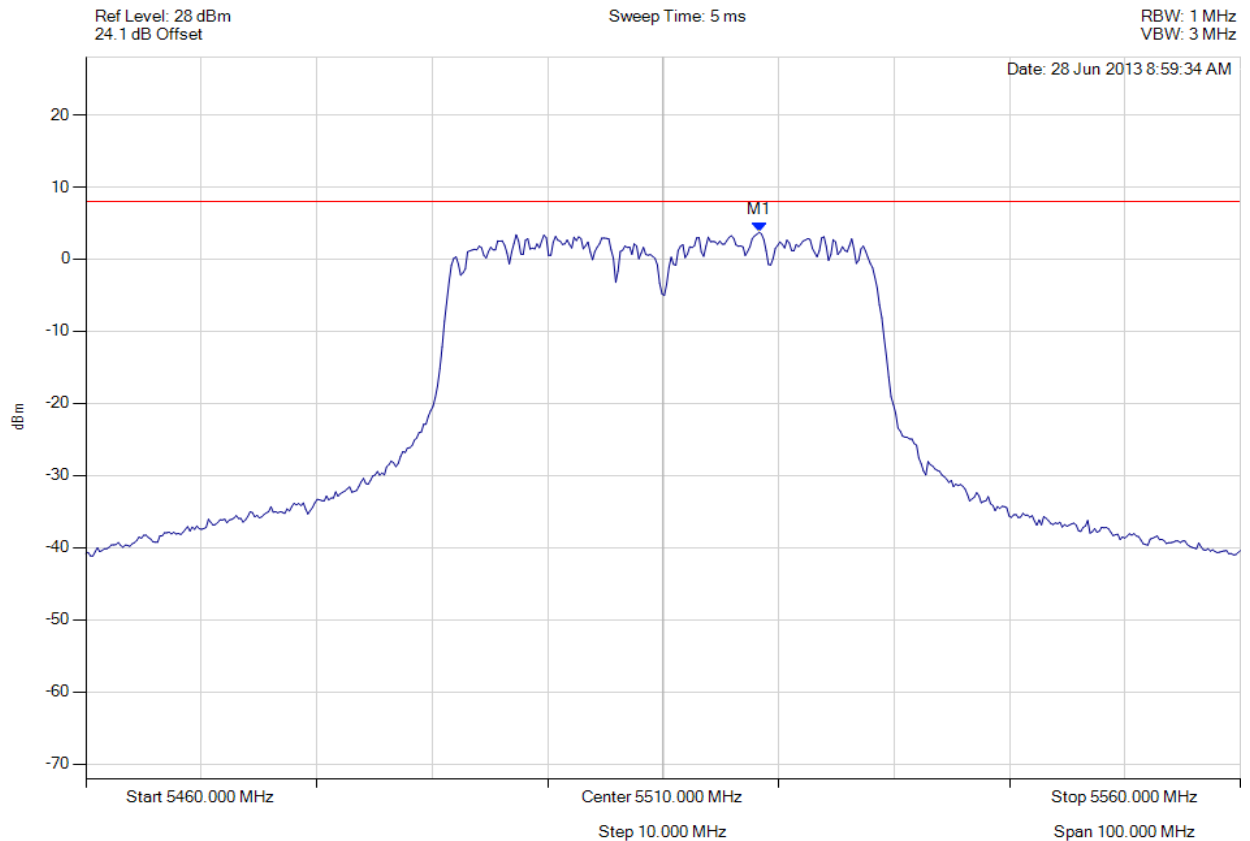

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5518.317 MHz : 3.741 dBm	Limit: ≤ 7.990 dBm Margin: -4.25 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 168 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

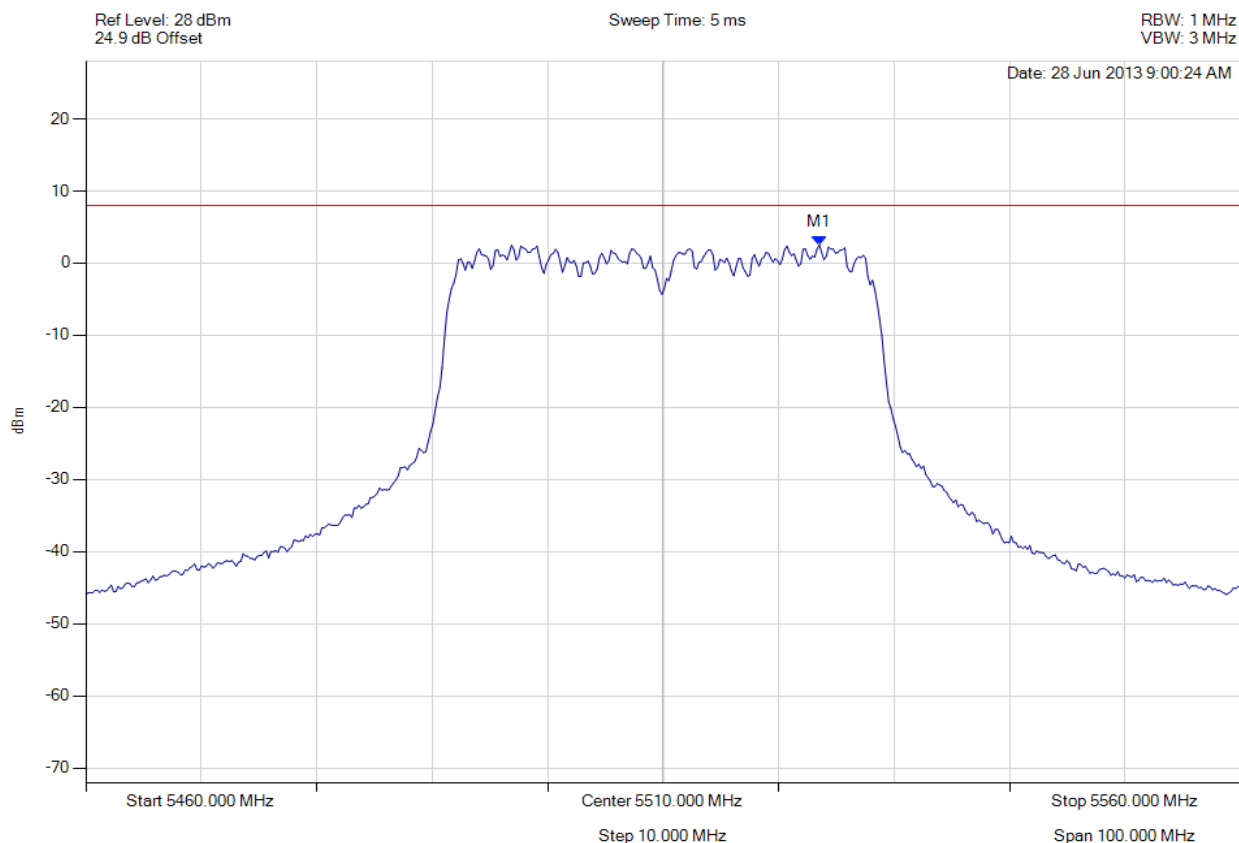

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5523.527 MHz : 2.548 dBm	Limit: ≤ 7.990 dBm Margin: -5.44 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 169 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

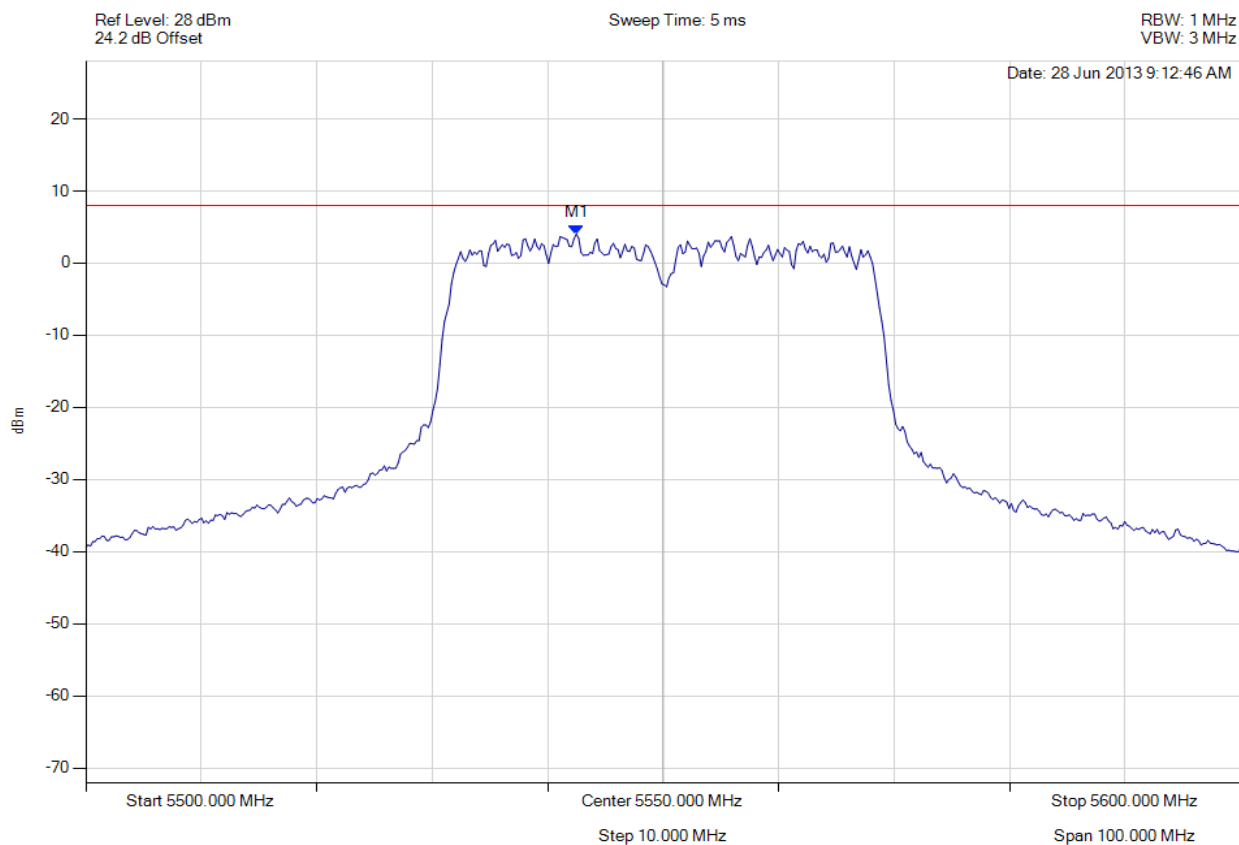

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5542.485 MHz : 4.031 dBm	Limit: ≤ 7.990 dBm Margin: -3.96 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 170 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

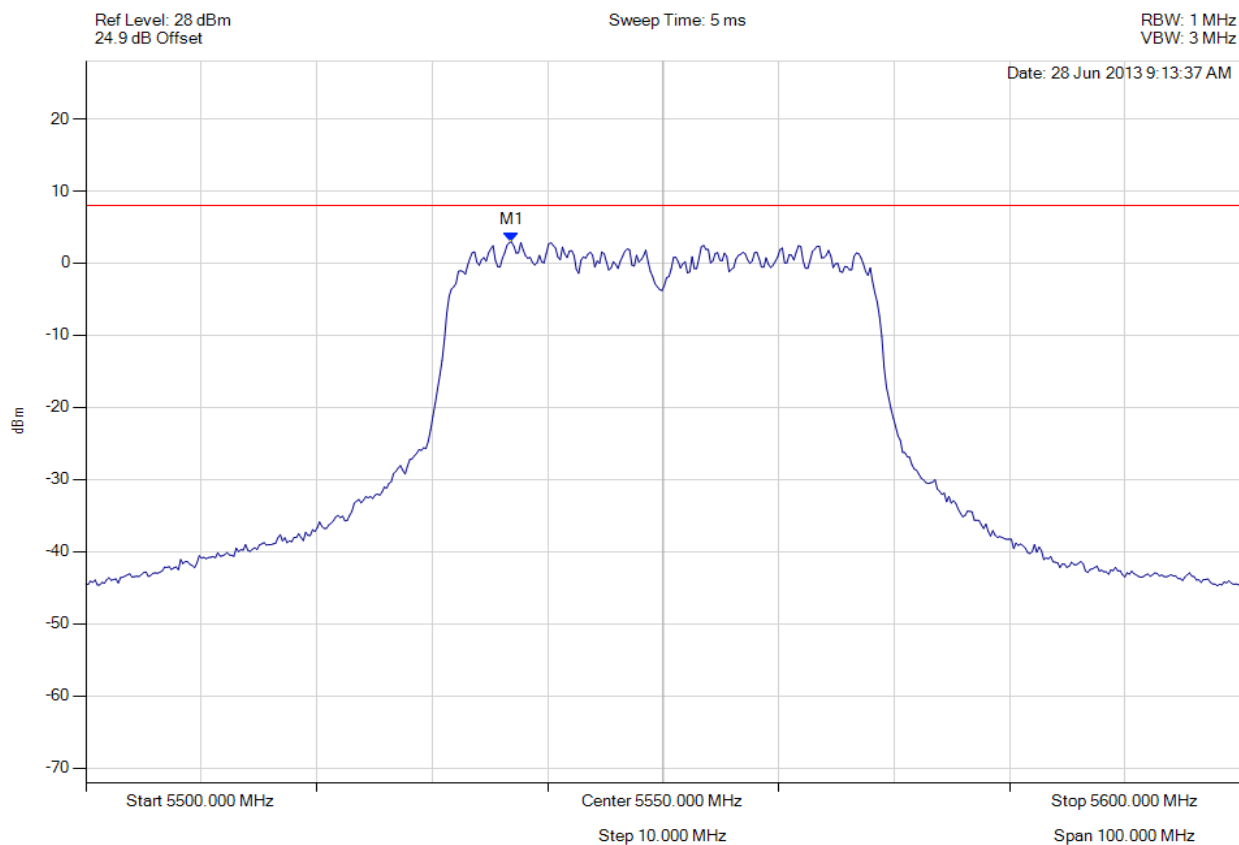

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5536.874 MHz : 2.949 dBm	Limit: ≤ 7.990 dBm Margin: -5.04 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 171 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5670.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

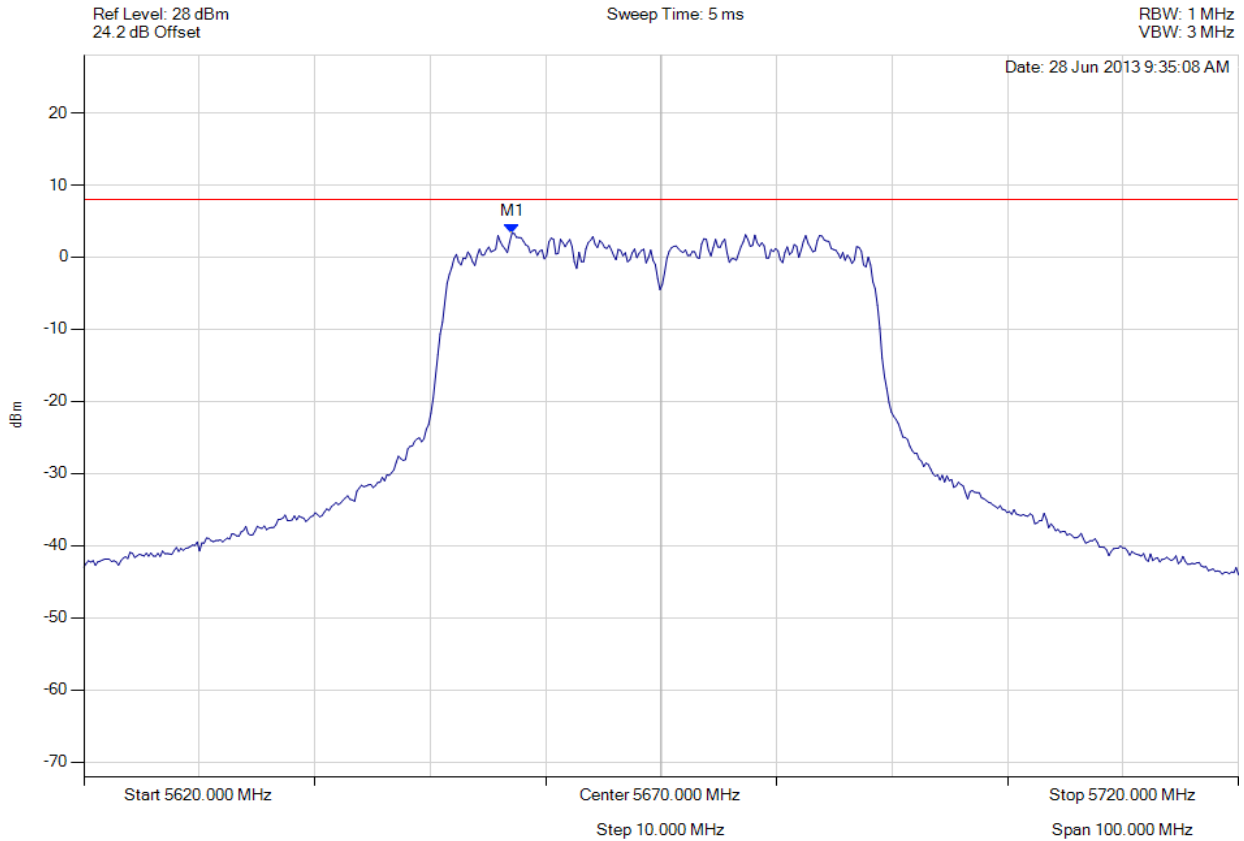

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5657.074 MHz : 3.311 dBm	Limit: ≤ 7.990 dBm Margin: -4.68 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 172 of 179



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5670.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

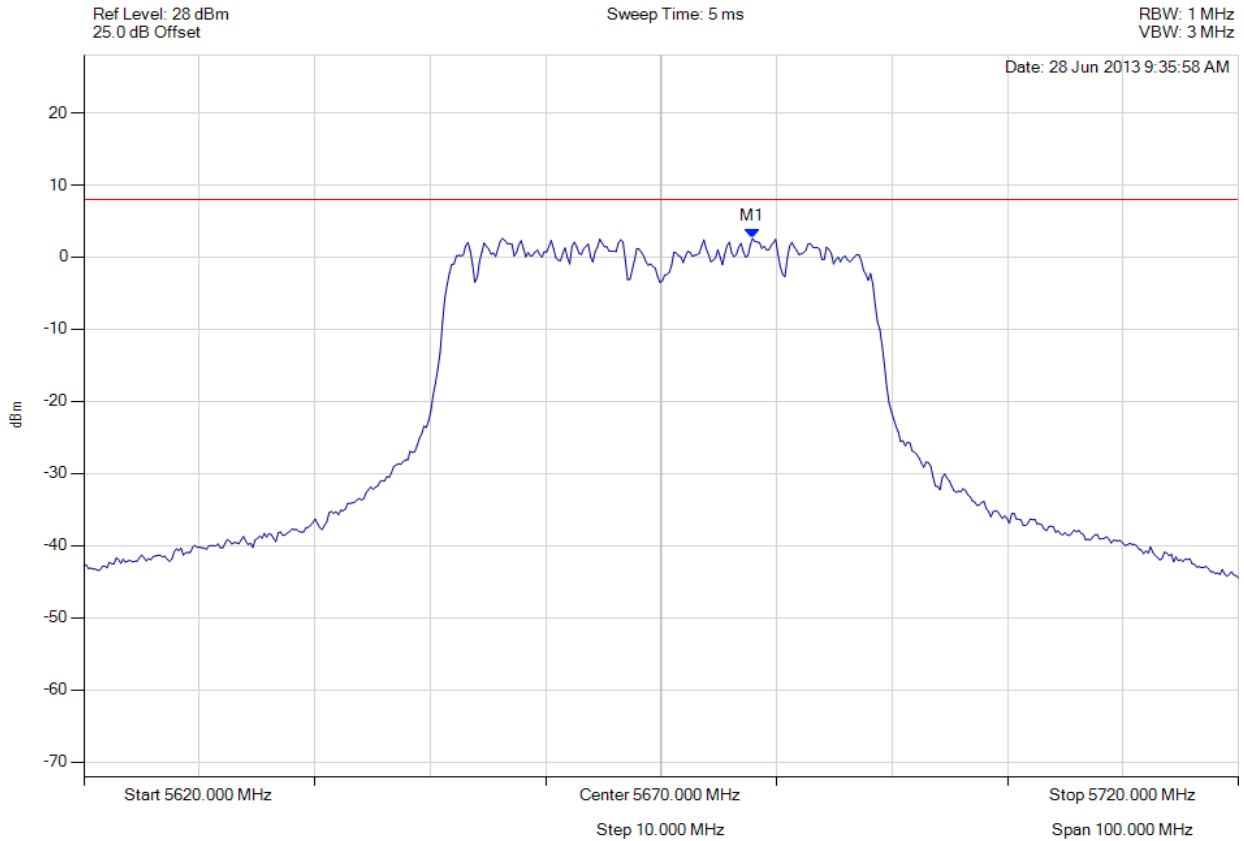

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5677.916 MHz : 2.589 dBm	Limit: ≤ 7.990 dBm Margin: -5.40 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 173 of 179

A.1.3. Peak Excursion Ratio



PEAK EXCURSION RATIO

Variant: 802.11a, Channel: 5260.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

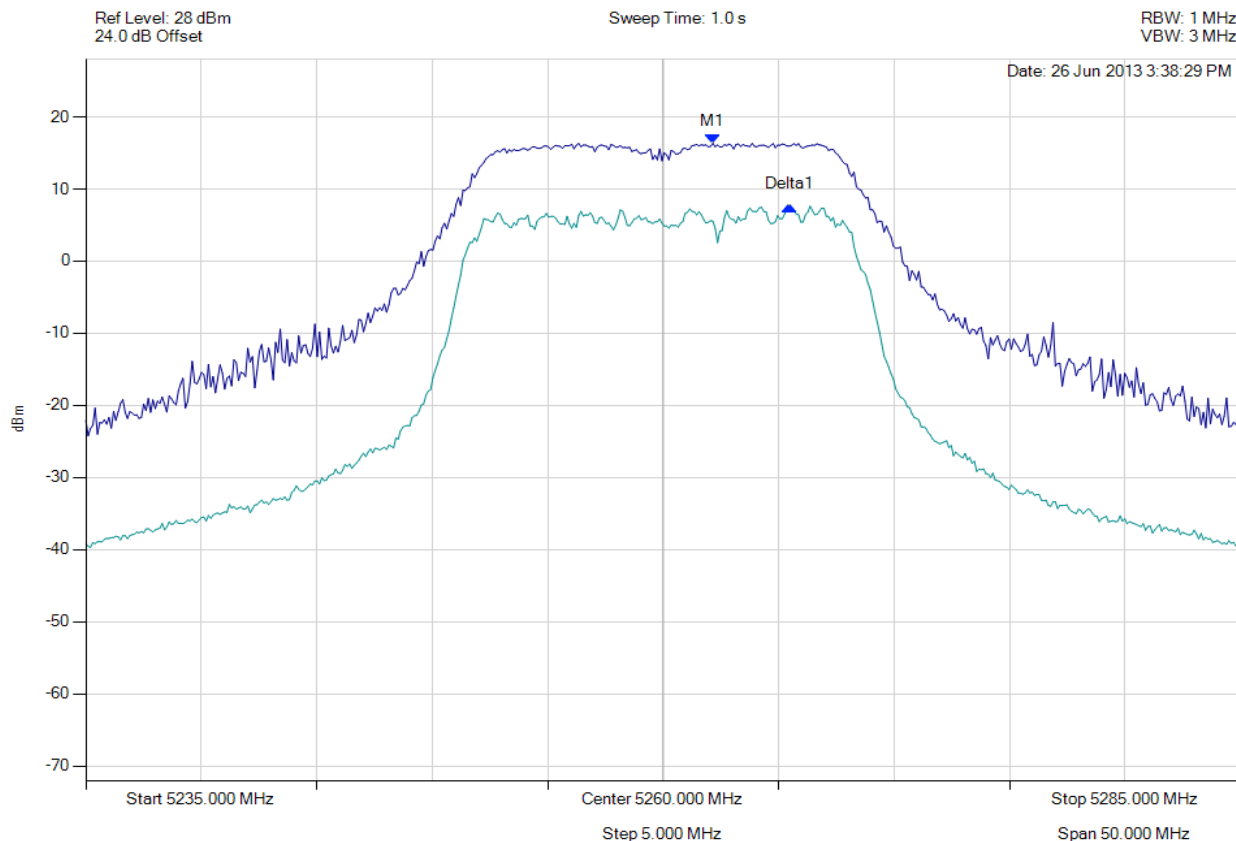

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Sweep Count = 0 RF Atten (dB) = 20 TRACE 1: Detector = MAX PEAK Trace Mode = VIEW TRACE 2: Detector = RMS Trace Mode = VIEW	M1 : 5262.154 MHz : 16.342 dBm Delta1 : 3.307 MHz : -8.712 dB	Measured Excursion Ratio: 8.71 dB Limit: 13.0 dB Margin: -4.29 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 174 of 179



PEAK EXCURSION RATIO

Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

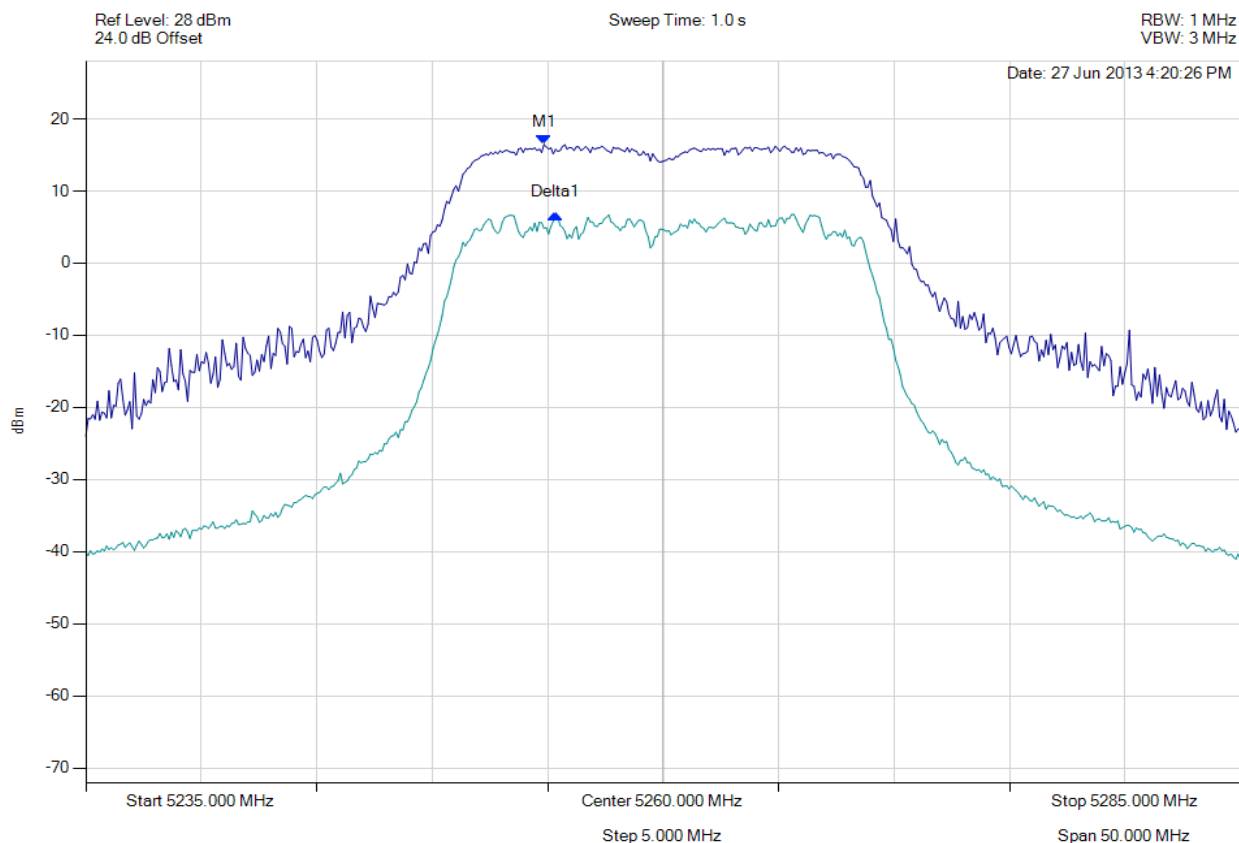

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Sweep Count = 0 RF Atten (dB) = 20 TRACE 1: Detector = MAX PEAK Trace Mode = VIEW TRACE 2: Detector = RMS Trace Mode = VIEW	M1 : 5254.840 MHz : 16.463 dBm Delta1 : 501 KHz : -9.637 dB	Measured Excursion Ratio: 9.64 dB Limit: 13.0 dB Margin: -3.36 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 175 of 179



PEAK EXCURSION RATIO

Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

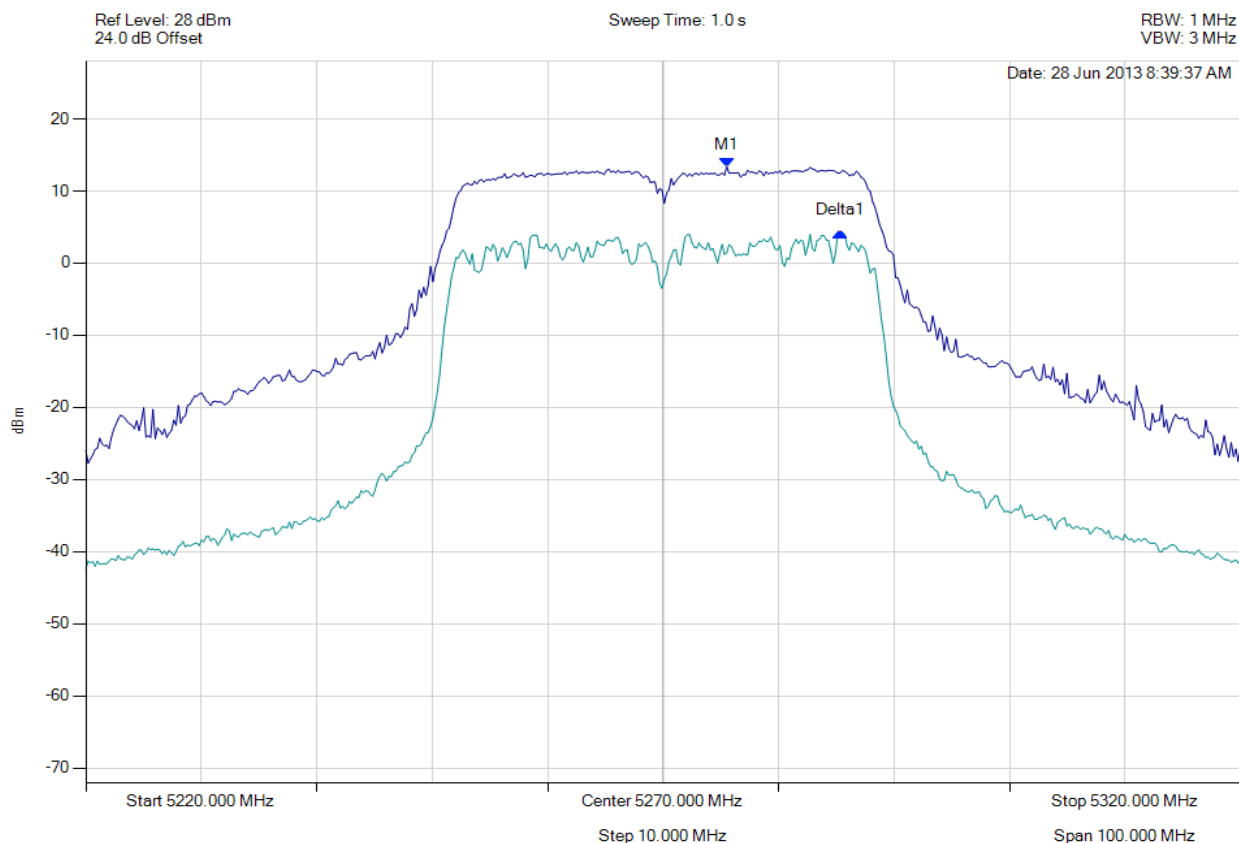

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Sweep Count = 0 RF Atten (dB) = 20 TRACE 1: Detector = MAX PEAK Trace Mode = VIEW TRACE 2: Detector = RMS Trace Mode = VIEW	M1 : 5275.511 MHz : 13.380 dBm Delta1 : 9.820 MHz : -9.079 dB	Measured Excursion Ratio: 9.08 dB Limit: 13.0 dB Margin: -3.92 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 176 of 179



PEAK EXCURSION RATIO

Variant: 802.11a, Channel: 5500.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

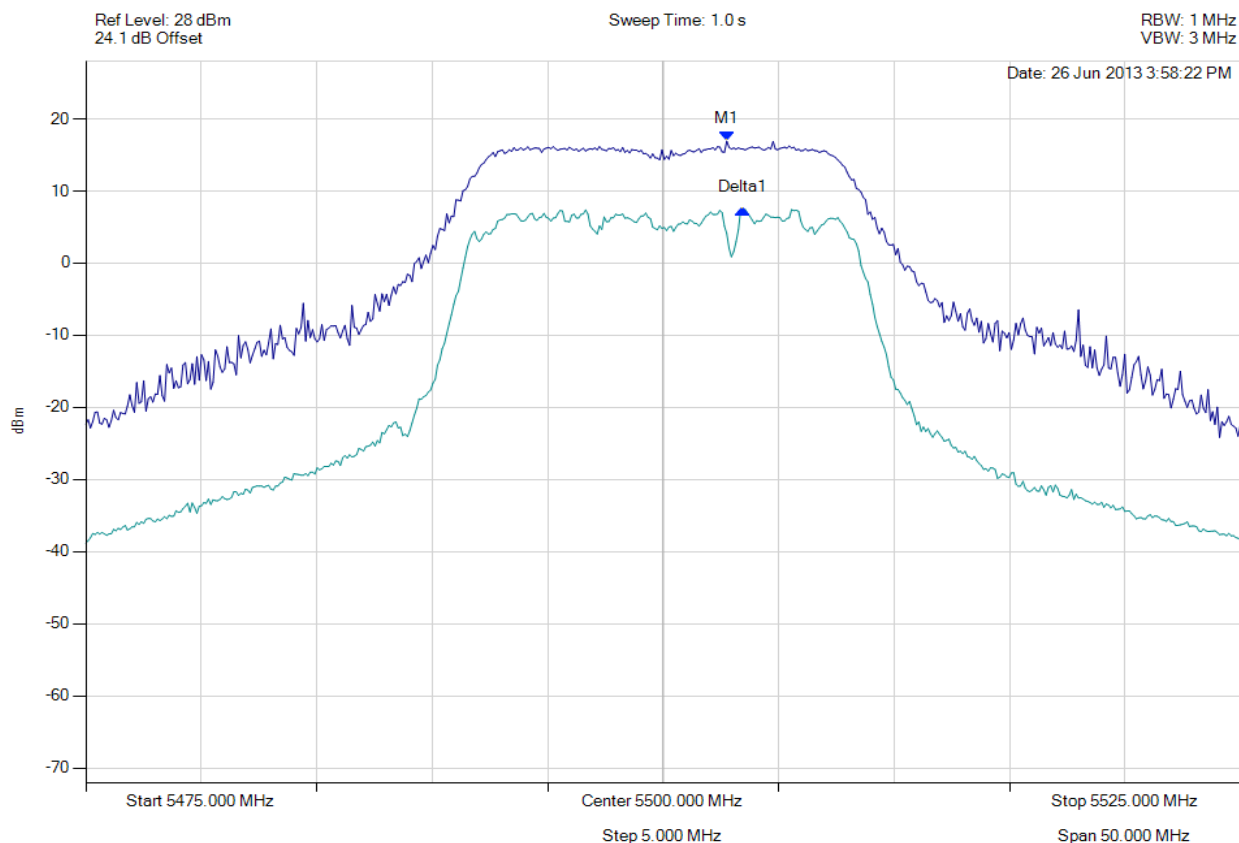

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Sweep Count = 0 RF Atten (dB) = 20 TRACE 1: Detector = MAX PEAK Trace Mode = VIEW TRACE 2: Detector = RMS Trace Mode = VIEW	M1 : 5502.756 MHz : 16.914 dBm Delta1 : 701 KHz : -9.435 dB	Measured Excursion Ratio: 9.44 dB Limit: 13.0 dB Margin: -3.56 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 177 of 179



PEAK EXCURSION RATIO

Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

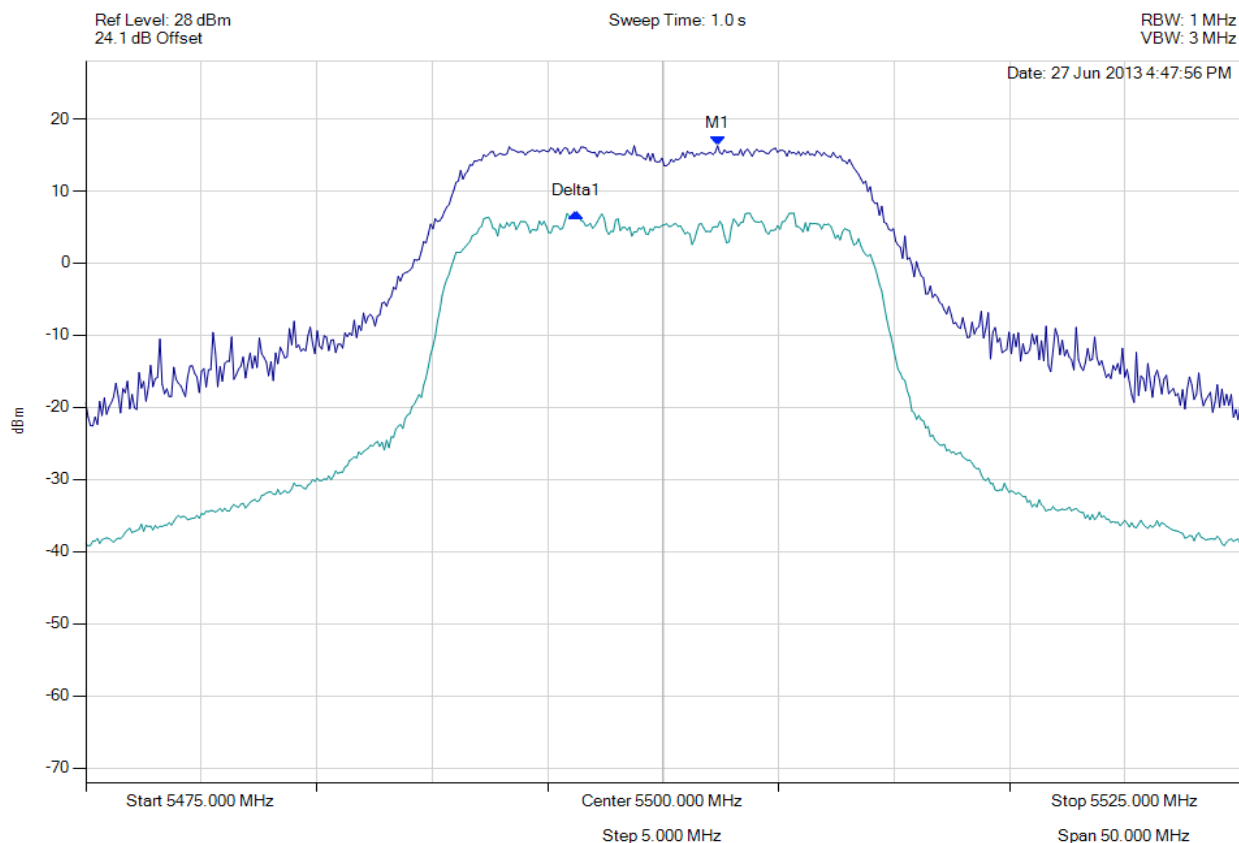

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Sweep Count = 0 RF Atten (dB) = 20 TRACE 1: Detector = MAX PEAK Trace Mode = VIEW TRACE 2: Detector = RMS Trace Mode = VIEW	M1 : 5502.355 MHz : 16.276 dBm Delta1 : -6112224 Hz : -9.289 dB	Measured Excursion Ratio: 9.29 dB Limit: 13.0 dB Margin: -3.71 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba APINR108, 109 Wireless Remote Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB121-U1 Rev A
Issue Date: 12th July 2013
Page: 178 of 179



PEAK EXCURSION RATIO

Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

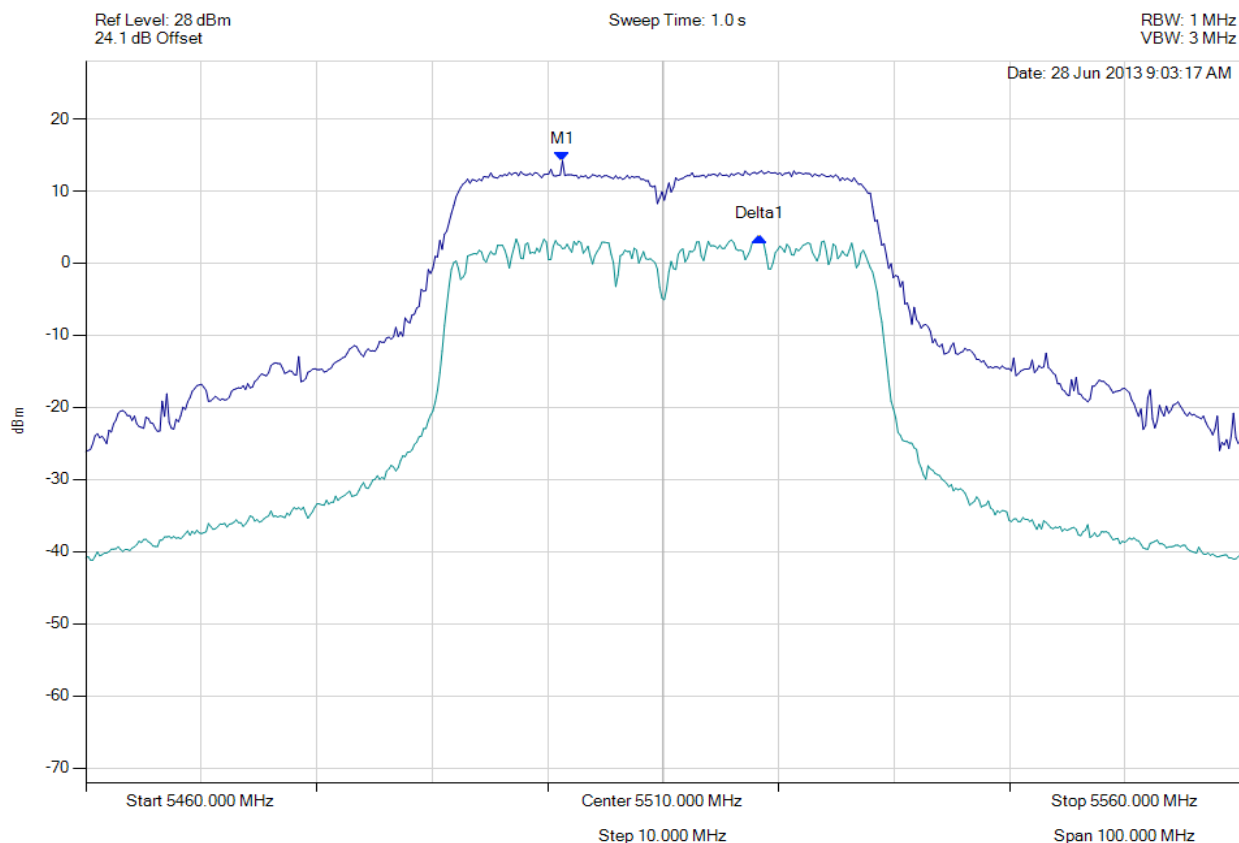

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Sweep Count = 0 RF Atten (dB) = 20 TRACE 1: Detector = MAX PEAK Trace Mode = VIEW TRACE 2: Detector = RMS Trace Mode = VIEW	M1 : 5501.283 MHz : 14.160 dBm Delta1 : 17.034 MHz : -10.450 dB	Measured Excursion Ratio: 10.45 dB Limit: 13.0 dB Margin: -2.55 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200
Pleasanton, CA 94566, USA
Tel: 1.925.462.0304
Fax: 1.925.462.0306
www.micomlabs.com