

Test of Aruba Networks APINR155, APINR15P

To: FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: ARUB156-U1 Rev A



TEST REPORT

FROM



Test of Aruba Networks APINR155, APINR15P

to

To FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: ARUB156-U1 Rev A

Note: this report contains data with regard to the 5,250 - 5,350 and 5,470 - 5,7250MHz bands for Aruba Networks, APINR155 and APINR15P Wireless Access Point. 2.4 and 5.8 GHz test data are reported in MiCOM Labs test report ARUB154-U1. RF data for the 5150 – 5250 MHz is reported in ARUB154-U2.

This report supersedes None

Applicant: Aruba Networks, Inc
1344 Crossman Avenue
Sunnyvale, California 94089
USA

Product Function: Wireless Remote Access Point

Copy No: pdf Issue Date: 8th August 2013

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.

440 Boulder Court, Suite 200

Pleasanton, CA 94566 USA

Phone: +1 (925) 462-0304

Fax: +1 (925) 462-0306

www.micomlabs.com



TEST CERTIFICATE #2381.01

MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 3 of 196

This page has been left intentionally blank

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF CONTENTS

ACCREDITATION, LISTINGS & RECOGNITION	5
TESTING ACCREDITATION	5
RECOGNITION	6
PRODUCT CERTIFICATION	7
1. TEST RESULT CERTIFICATE	9
2. REFERENCES AND MEASUREMENT UNCERTAINTY	10
2.1. Normative References.....	10
2.2. Test and Uncertainty Procedures.....	11
3. PRODUCT DETAILS AND TEST CONFIGURATIONS	12
3.1. Technical Details.....	12
3.2. Scope of Test Program	13
3.3. Equipment Model(s) and Serial Number(s).....	17
3.4. Antenna Details.....	17
3.5. Cabling and I/O Ports.....	17
3.6. Test Configurations	18
3.7. Equipment Modifications	19
3.8. Deviations from the Test Standard.....	19
3.9. Subcontracted Testing or Third Party Data.....	19
4. TESTING EQUIPMENT CONFIGURATION(S)	20
4.1. Conducted RF Emission Test Set-up.....	20
4.2. Radiated Spurious Emission Test Set-up > 1 GHz	21
4.3. Digital Emissions Test Set-up (0.03 – 1 GHz).....	22
4.4. ac Wireline Emission Test Set-up	23
5. TEST SUMMARY	24
6. TEST RESULTS	26
6.1. Device Characteristics.....	26
6.1.1. <i>Conducted Testing</i>	26
6.1.2. <i>Radiated Emission Testing</i>	53
6.1.3. <i>AC Wireline Conducted Emissions (150 kHz – 30 MHz)</i>	76
7. PHOTOGRAPHS	80
7.1. Test Setup - Conducted	80
7.2. Test Setup - Digital Emissions below 1 GHz.....	81
7.3. Radiated Emissions Test Setup >1 GHz.....	82
8. TEST EQUIPMENT DETAILS	83
APPENDIX	84
A. SUPPORTING INFORMATION	84
A.1. CONDUCTED TEST PLOTS	84
A.1.1. <i>26 dB & 99% Bandwidth</i>	85
A.1.2. <i>Peak Power Spectral Density</i>	136
A.1.3. <i>Peak Excursion Ratio</i>	190

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

ACCREDITATION, LISTINGS & RECOGNITION

TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



RECOGNITION

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA** countries. Our test reports are widely accepted for global type approvals.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

**APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

**EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

**NB – Notified Body

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard EN ISO/IEC Guide 65. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



USA Telecommunication Certification Body (TCB) - TCB Identifier – US0159

Industry Canada Certification Body - CAB Identifier – US0159

European Notified Body - Notified Body Identifier - 2280

Japan – Recognized Certification Body (RCB) - RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 8 of 196

DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	8 th August 2013	Initial release

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 9 of 196

1. TEST RESULT CERTIFICATE

Applicant:	Aruba Networks, Inc 1344 Crossman Avenue Sunnyvale, California 94089 USA	Tested By:	MiCOM Labs, Inc. 440 Boulder Court Suite 200 Pleasanton California, 94566, USA
EUT:	Wireless Remote Access point	Tel:	+1 925 462 0304
Model:	APINR155, APINR15P	Fax:	+1 925 462 0306
S/N:	CC00000002		
Test Date(s):	23rd - 30th March & 30th July - 2nd August 2013	Website:	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 15.407 & IC RSS-210	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.


Approved & Released for MiCOM Labs, Inc. by:



TESTING CERTIFICATE #2381.01



Graeme Grieve
Quality Manager MiCOM Labs,



Gordon Hurst
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

2. REFERENCES AND MEASUREMENT UNCERTAINTY

2.1. Normative References

Ref.	Publication	Year	Title
(i)	FCC 47 CFR Part 15.407	2012	Code of Federal Regulations
(ii)	FCC 06-96	June 2006	Memorandum Opinion and Order
(iii)	FCC OET KDB 662911	4 th April 2011	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
(iv)	Industry Canada RSS-210	2010	Low Power License-Exempt Radiocommunication Devices (All Frequency Bands): Category 1 Equipment
(v)	Industry Canada RSS-Gen	2010	General Requirements and Information for the Certification of Radiocommunication Equipment
(vi)	ANSI C63.4	2009	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
(vii)	CISPR 22/ EN 55022	2008 2006+A1:2007	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
(viii)	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
(ix)	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
(x)	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
(xi)	A2LA	July 2012	Reference to A2LA Accreditation Status – A2LA Advertising Policy
(xii)	FCC Public Notice – DA 02-2138	2002	Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 11 of 196

2.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 12 of 196

3. PRODUCT DETAILS AND TEST CONFIGURATIONS

3.1. Technical Details

Details	Description
Purpose:	Test of the Aruba Networks APINR155, APINR15P in the frequency range 5,250 – 5,350 and 5,470 - 5725 MHz to FCC Part 15.407 and Industry Canada RSS-210 regulations.
Applicant:	Aruba Networks, Inc 1344 Crossman Avenue Sunnyvale, California 94089 USA
Manufacturer:	As applicant
Laboratory performing the tests:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA
Test report reference number:	ARUB156-U1 Rev A
Date EUT received:	22 nd March 2013
Standard(s) applied:	FCC 47 CFR Part 15.407 & IC RSS-210
Dates of test (from - to):	23 rd - 30 th March & 30 th July - 2 nd August 2013
No of Units Tested:	One
Type of Equipment:	802.11a/b/g/n Wireless Remote Access Point 2.4 GHz: 2x2, 5 GHz: 3x3 Spatial Multiplexing MIMO configuration
Applicants Trade Name:	Aruba Networks
Model(s):	APINR155, APINR15P
Location for use:	Indoor only
Declared Frequency Range(s):	5250 – 5,350 and 5,470 – 5,725 MHz
Hardware Rev	Rev A
Software Rev	6.3.0.0
Type of Modulation:	Per 802.11 – OFDM
EUT Modes of Operation:	Legacy 802.11a, 802.11n HT-20, HT-40
Declared Nominal Output Power: (Average Power)	802.11a: Legacy +18 dBm 802.11n: HT-20 +18 dBm 802.11n: HT-40 +18 dBm
Transmit/Receive Operation:	Time Division Duplex
Rated Input Voltage and Current:	APINR155 12 Vdc 1.5 A APINR15P 54 Vdc 1.0 A
Operating Temperature Range:	Declared range 0° to +40°C
ITU Emission Designator:	802.11a 16M8D1D 802.11n HT-20 17M9D1D 802.11n HT-40 36M3D1D
Equipment Dimensions:	185mm (W) x 245mm (H) x 65mm (D)
Weight:	700 g
Primary function of equipment:	Wireless Remote Access Point for transmitting data and voice.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 13 of 196

3.2. Scope of Test Program

Aruba Networks APINR155, APINR15P Access Point RF Testing

The scope of the test program was to test the Aruba Networks APINR155, APINR15P Wireless Remote Access point, 3X3 Spatial Multiplexing MIMO configurations in the frequency range 5,250 – 5,350 and 5,470 – 5,725 MHz for compliance against FCC 47 CFR Part 15.407 and Industry Canada RSS-210 specifications.

FCC OET KDB Implementation

This test program implements the following FCC KDB – 662911 4/4/2011;

Emissions Testing of Transmitters with Multiple Outputs in the Same Band

The KDB document provides guidance for measurements of conducted output emissions of devices that employ a single transmitter with multiple outputs in the same band, with the outputs occupying the same or overlapping frequency ranges. It applies to EMC compliance measurements on devices that transmit on multiple antennas simultaneously in the same or overlapping frequency ranges through a coordinated process. Examples include, but are not limited to, devices employing beam forming or multiple-input and multiple-output (MIMO.) This guidance applies to both licensed and unlicensed devices wherever the FCC rules call for conducted output measurements. Guidance is provided for in-band, out-of-band and spurious emission measurements.

This guidance does not apply to the multiple transmitters included in a composite device, such as a device that combines an 802.11 modem with a cell phone in one enclosure with each driving its own antenna.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

APINR155 Wireless Remote Access point



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

APINR155 Wireless Remote Access point (Rear)



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**APINR155, APINR15P Wireless Remote
Access point Label**

Device has an electronic label



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 17 of 196

3.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	Wireless Remote Access point	Aruba Networks	APINR155	CC00000002
Support	Laptop PC	IBM	Thinkpad	None

3.4. Antenna Details

Model	Type	Gain (dBi)	Freq. Band (MHz)	Note
Integral	Omni Directional	3.0	5150 - 5850	3x per unit

3.5. Cabling and I/O Ports

Number and type of I/O ports

Port Type	Port Description	Qty	Screened (Yes/ No)	Length
Ethernet	Ethernet PoE	1	NO	> 10m
Ethernet	Ethernet	1	NO	3m-10m
12 Vdc Input	Power	1	NO	1m-3m
Serial RS 323 (RJ45)	Serial Console	1	NO	1m-3m
USB	USB port	1	NO	1m-3m

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



3.6. Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Matrix of test configurations

Operational Mode(s) (802.11)	Variant	Data Rates with Highest Power	Frequencies (MHz)
5250-5350 5470-5725	802.11a	6 MBit/s	5260,5300,5320
	802.11n HT-20	6.5 MCS	5500,5580,5700
	802.11n HT-40	13.5 MCS	5270,5310 5510,5550,5670

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Spurious Emission and Band-Edge Test Strategy
Bands 5,150 – 5250; 5,250 – 5,350**

11a	11n HT-20	11n HT-40
SE 5260	SE 5260	SE 5270
SE 5300	SE 5300	
SE 5340	SE 5320	SE 5310
BE 5150	BE 5150	BE 5150
BE 5350	BE 5350	BE 5350

KEY:-

SE – Spurious Emissions

BE – Band-Edge

Band 5,470 – 5,725

11a	11n HT-20	11n HT-40
SE 5500	SE 5500	SE 5510
SE 5580	SE 5580	SE 5550
SE 5700	SE 5700	SE 5670
BE 5470	BE 5470	BE 5470

3.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

3.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

3.9. Subcontracted Testing or Third Party Data

1. NONE

4. TESTING EQUIPMENT CONFIGURATION(S)


4.1. Conducted RF Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.1.1. 26 dB and 99% Bandwidth
2. Section 6.1.1.2. Maximum Conducted Output Power
3. Section 6.1.1.3. Peak Power Spectral Density
4. Section 6.1.1.4. Peak Excursion Ratio

Conducted Test Set-Up Pictorial Representation

3 - Port Test Configuration

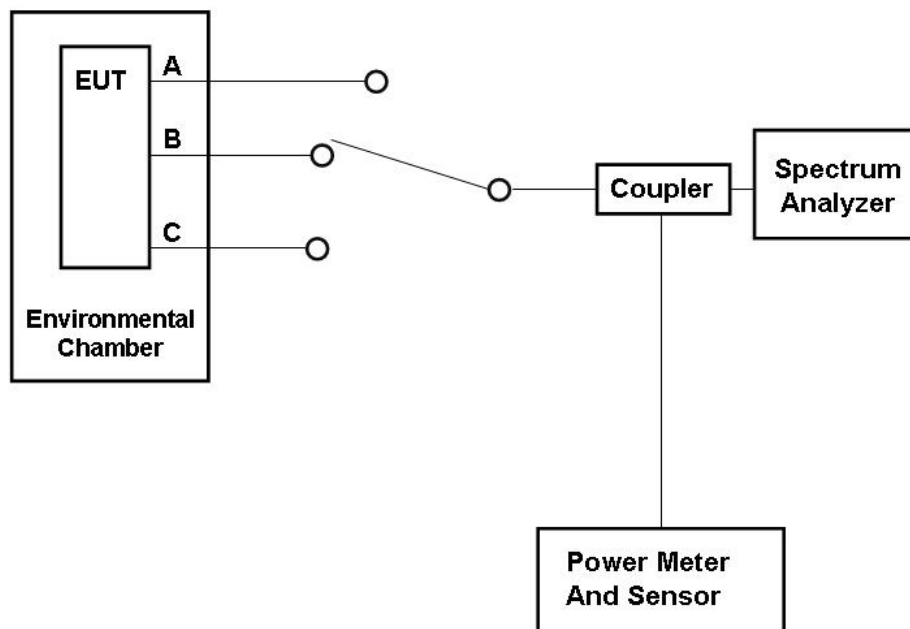


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

4.2. Radiated Spurious Emission Test Set-up > 1 GHz

The following tests were performed using the conducted test set-up shown in the diagram below.

Radiated Emission Measurement Setup – Above 1 GHz

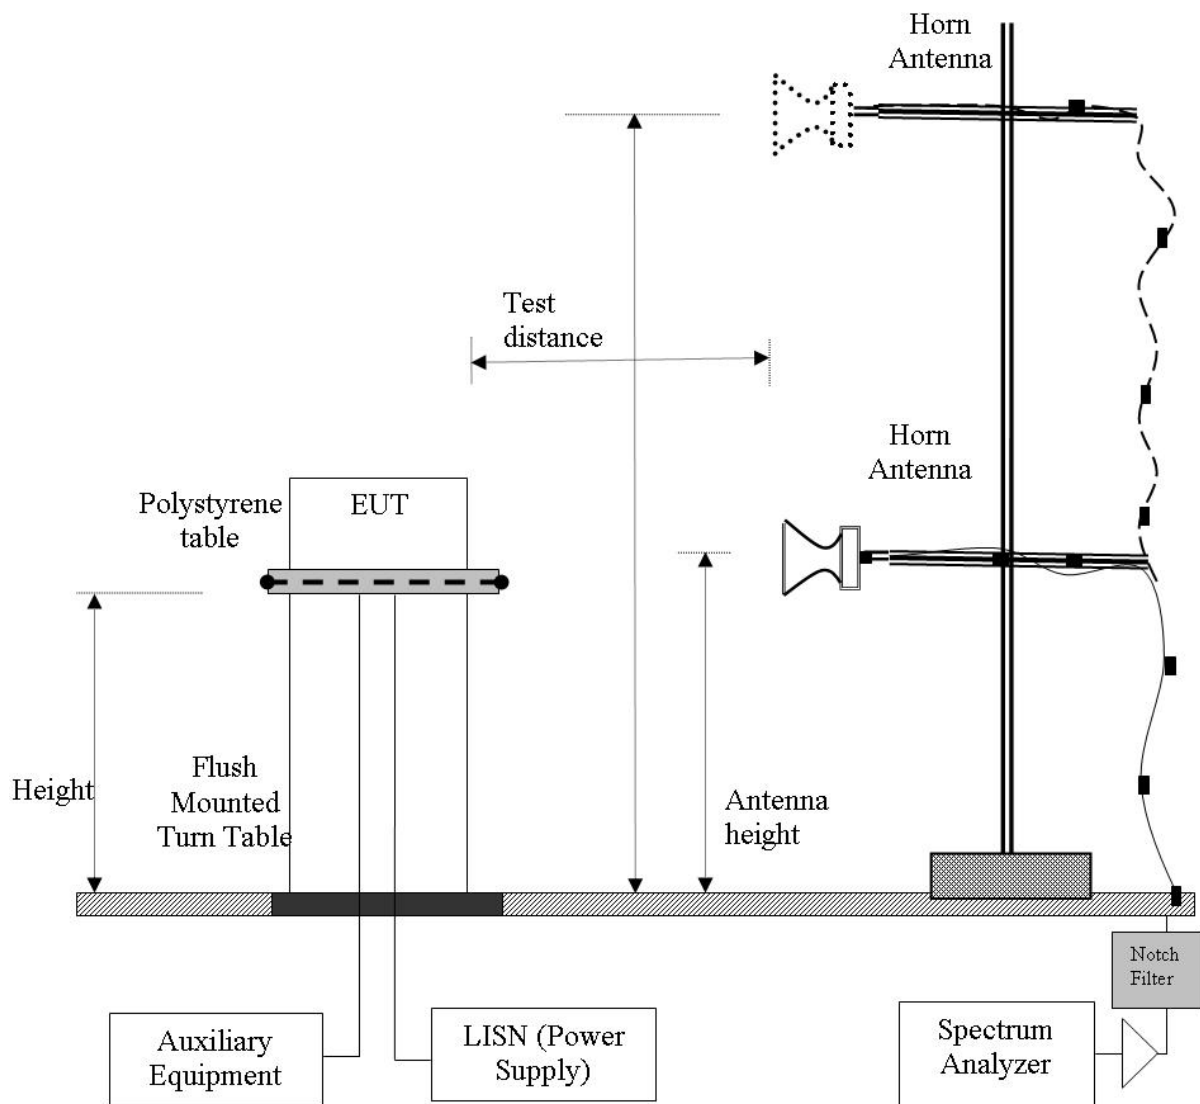


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

4.3. Digital Emissions Test Set-up (0.03 – 1 GHz)

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.2.4. Digital Emissions

Digital Emission Measurement Setup – Below 1 GHz

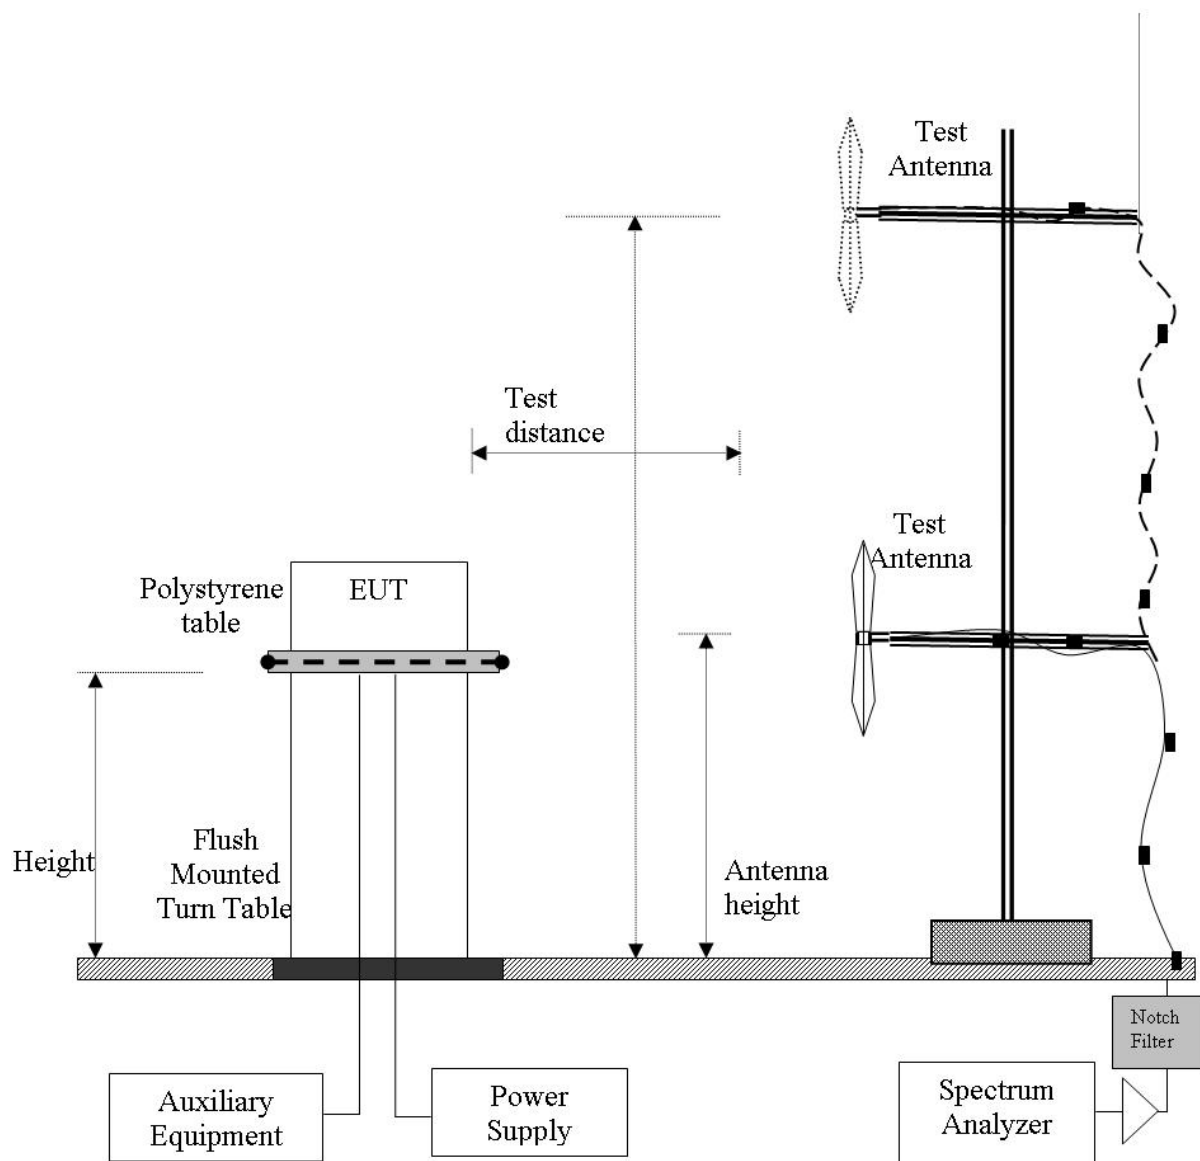


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

4.4. ac Wireline Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.3 ac Wireline Conducted Emissions

Conducted Test Set-Up Pictorial Representation

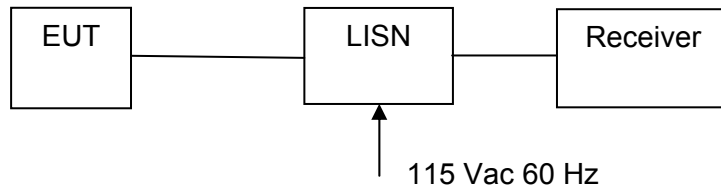

Measurement set up for ac Wireline Conducted Emissions Test



5. TEST SUMMARY

List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.407(a) A9.2(2) 4.4	26dB and 99% Emission BW	Emission bandwidth measurement	Conducted	Complies	6.1.1.1 A.1.1
15.407(a) A9.2(2) 4.6	Maximum Conducted Output Power	Power Measurement	Conducted	Complies	6.1.1.2
15.407(a) A9.2(2)	Peak Power Spectral Density	PPSD	Conducted	Complies	6.1.1.3 A.1.2
15.407(a)(6)	Peak Excursion Ratio	<13dB in any 1MHz bandwidth	Conducted	Complies	6.1.1.4 A.1.3
15.407(g) 15.31 2.1 4.5	Frequency Stability	Limits: contained within band of operation at all times.	Applicant declaration	Complies	6.1.1.5

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



List of Measurements (continued)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.407(b)(2) 15.205(a) 15.209(a) 2.2 2.6 A9.3(2) 4.7	Radiated Emissions		Radiated		6.1.2
	Transmitter Radiated Spurious Emissions	Emissions above 1 GHz		Complies	6.1.2.1 6.1.2.2 6.1.2.3
	Radiated Band Edge	Band edge results		Complies	6.1.2.1 6.1.2.2 6.1.2.3
15.407(b)(6) 15.205(a) 15.209(a) 2.2	Radiated Emissions	Emissions <1 GHz (30M-1 GHz)		Complies	6.1.2.4
15.407(b)(6) 15.207 7.2.2	AC Wireline Conducted Emissions 150 kHz–30 MHz	Conducted Emissions	Conducted	N/A EUT is POE powered - not shipped with equipment	6.1.3

Note 1: Test results reported in this document relate only to the items tested

Note 2: The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

Note 3: Section 3.7 Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 26 of 196

6. TEST RESULTS

6.1. Device Characteristics

6.1.1. Conducted Testing

6.1.1.1. 26 dB and 99 % Bandwidth

Conducted Test Conditions for 26 dB and 99% Bandwidth			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	26 dB and 99 % Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a)	Pressure (mBars):	999 - 1001
Reference Document(s):	KDB 789033 - D01 DTS General UNII Test Procedures v01		

Test Procedure for 26 dB and 99% Bandwidth Measurement

The bandwidth at 26 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. KDB 789033 Section 5.1 Emission Bandwidth was used in order to prove compliance. The Resolution Bandwidth was set to approximately 1% of the emission bandwidth.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 27 of 196

Measurement Results for 26 dB and 99 % Operational Bandwidth(s)

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11a	Duty Cycle (%):	100
Data Rate:	6.0 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5260.0	22.645	22.946	22.144		22.946	22.144		
5300.0	22.645	22.545	22.144		22.645	22.144		
5320.0	22.144	22.745	22.044		22.745	22.044		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5260.0	16.834	16.633	16.633		16.834	16.633		
5300.0	16.633	16.633	16.633		16.633	16.633		
5320.0	16.633	16.633	16.633		16.633	16.633		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 28 of 196

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11a	Duty Cycle (%):	100
Data Rate:	6.0 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d	Highest	Lowest		
5500.0	22.445	21.944	22.345		22.445	21.944		
5580.0	22.745	22.345	22.244		22.745	22.244		
5700.0	22.345	22.044	22.244		22.345	22.044		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d	Highest	Lowest		
5500.0	16.733	16.633	16.633		16.733	16.633		
5580.0	16.733	16.633	16.633		16.733	16.633		
5700.0	16.733	16.633	16.533		16.733	16.533		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 29 of 196

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11n HT-20	Duty Cycle (%):	100
Data Rate:	6.5 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d	Highest	Lowest		
5260.0	23.848	23.347	23.146		23.848	23.146		
5300.0	23.347	23.747	23.146		23.747	23.146		
5320.0	23.547	22.846	23.246		23.547	22.846		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d	Highest	Lowest		
5260.0	17.836	17.735	17.735		17.836	17.735		
5300.0	17.836	17.836	17.735		17.836	17.735		
5320.0	17.836	17.735	17.836		17.836	17.735		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 30 of 196

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11n HT-20	Duty Cycle (%):	100
Data Rate:	6.5 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d	Highest	Lowest		
5500.0	23.447	23.046	23.046		23.447	23.046		
5580.0	23.046	23.046	23.246		23.246	23.046		
5700.0	23.146	22.946	23.046		23.146	22.946		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d	Highest	Lowest		
5500.0	17.836	17.836	17.836		17.836	17.836		
5580.0	17.836	17.836	17.836		17.836	17.836		
5700.0	17.735	17.735	17.836		17.836	17.735		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 31 of 196

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11n HT-40	Duty Cycle (%):	100
Data Rate:	13.5 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d	Highest	Lowest		
5270.0	44.689	44.890	43.287		44.890	43.287		
5310.0	44.890	44.088	43.687		44.890	43.687		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d	Highest	Lowest		
5270.0	36.273	36.273	36.273		36.273	36.273		
5310.0	36.273	36.273	36.273		36.273	36.273		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 32 of 196

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11n HT-40	Duty Cycle (%):	100
Data Rate:	13.5 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d	Highest	Lowest		
5510.0	45.090	44.489	43.687		45.090	43.687		
5550.0	44.289	46.293	44.489		46.293	44.289		
5670.0	44.489	46.493	44.689		46.493	44.489		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d	Highest	Lowest		
5510.0	36.273	36.273	36.273		36.273	36.273		
5550.0	36.273	36.273	36.273		36.273	36.273		
5670.0	36.273	36.273	36.273		36.273	36.273		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification

Limits

FCC, Part 15 §15.407 (a)(1), (a)(2) and Industry Canada RSS-210 § A9.2(2)

(a)(1) For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $+4 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

(a)(2) For the 5.25-5.35 GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $+11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-Gen 4.4

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

Traceability

Test Equipment Used

0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117
--



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 34 of 196

6.1.1.2. Maximum Conducted Output Power

Conducted Test Conditions for Maximum Conducted Output Power			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Maximum Conducted Output Power	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a)	Pressure (mBars):	999 - 1001
Reference Document(s):	KDB 789033 - D01 DTS General UNII Test Procedures v01		
Test Procedure for Maximum Conducted Output Power Measurement			
<p><u>Method PM (Measurement using an RF average power meter)</u>. Section C) 4) of KDB 789033 defines a methodology using an average wideband power meter. Measurements were made while the EUT was operating in a continuous transmission mode (100% duty cycle) at the appropriate center frequency. All cable losses and offsets were taken into consideration in the measured result. All operational modes and frequency bands were measured independently and the resultant \square calculated. For multiple outputs, the measurements were made simultaneously on each output port and summed in a linear fashion. This technique was used in order to prove compliance.</p>			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Antenna Power Levels

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5470 – 5725 MHz Correlated Operation (Non-MIMO i.e. Legacy)

Antenna Model	Gain dBi	Antenna Gain Increase V's No. Antenna Ports		Total Gain dBi	Max. Allowable Conducted Peak Power	Maximum EIRP
		Ports	dB		Σ (dBm)	(dBm)
Integral	3.0	3	4.77	7.77	+22.23	+30

5470 – 5725 MHz Uncorrelated Operation (MIMO)

Antenna (dB)	Gain (dBi)	Max. Allowable Conducted Peak Power (dBm)		Maximum EIRP (dBm)
		Uncorrelated	Max. Power Per Chain	(dBm)
Integral	3.0	24	+19.23	+27

The APINR-155 and APINR-15P does not implement beam-forming



Maximum Transmit (Conducted) Power, FCC Limits and Industry Canada Limits

FCC Limits

Bands 5250 – 5350 and 5470 – 5725 MHz

Limit lesser of: 250 mW or 11 dBm + 10 log (B) dBm.

Mode	Frequency Range (MHz)	Minimum 26 dB Bandwidth (MHz)	11 + 10 Log (B) (dBm)	Limit (dBm)
a	5250 – 5350 5470 – 5725	21.944	+24.41	+24.0
HT-20		22.846	+24.59	+24.0
HT-40		43.287	+27.36	+24.0

Industry Canada Limits

Bands 5250 – 5350 and 5470 – 5725 MHz

Limit lesser of: 250 mW or 11 dBm + 10 log (B) dBm.

Mode	Frequency Range (MHz)	99% Bandwidth (MHz)	11 + 10 Log (B) (dBm)	Limit (dBm)
a	5250 – 5350 5470 – 5725	16.533	+23.18	+23.18
HT-20		17.735	+23.49	+23.49
HT-40		36.273	+26.60	+24.00



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 37 of 196

Equipment Configuration for Peak Transmit Power

Variant:	802.11a	Duty Cycle (%):	100
Data Rate:	6.0 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	N/A
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5260.0	18.13	16.59	16.34		21.87	22.144	24.00	-2.13	17.0
5300.0	18.00	16.99	16.33		21.93	22.144	24.00	-2.07	17.0
5320.0	17.98	17.56	16.57		22.18	22.044	24.00	-1.82	17.0

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Equipment Configuration for Peak Transmit Power

Variant:	802.11a	Duty Cycle (%):	100
Data Rate:	6.0 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	N/A
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5500.0	16.85	17.03	16.17		21.47	21.944	24.00	-2.53	16.00
5580.0	16.74	16.70	15.10		21.02	22.244	24.00	-2.98	16.00
5700.0	15.83	16.06	14.56		20.30	22.044	24.00	-3.70	16.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 38 of 196

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-20	Duty Cycle (%):	100
Data Rate:	6.5 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	N/A
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5260.0	17.71	16.29	16.19		21.56	23.146	24.00	-2.44	17.50
5300.0	17.62	16.80	16.08		21.65	23.146	24.00	-2.35	16.50
5320.0	17.56	17.57	16.28		21.95	22.846	24.00	-2.05	16.50

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-20	Duty Cycle (%):	100
Data Rate:	6.5 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	N/A
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5500.0	16.66	16.82	16.14		21.32	23.046	24.00	-2.68	16.00
5580.0	17.12	17.06	15.47		21.39	23.046	24.00	-2.61	16.50
5700.0	16.75	17.00	15.19		21.16	22.946	24.00	-2.84	16.50

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 39 of 196

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-40	Duty Cycle (%):	100
Data Rate:	13.5 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	N/A
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5270.0	18.34	16.86	16.72		22.14	43.287	24.00	-1.86	Target
5310.0	19.35	18.08	17.53		23.16	43.687	24.00	-0.84	Target

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-40	Duty Cycle (%):	100
Data Rate:	13.5 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	N/A
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dBm	
5510.0	18.67	18.71	17.66		23.14	43.687	24.00	-0.86	Target
5550.0	18.49	18.25	16.93		22.71	44.289	24.00	-1.29	Target
5670.0	17.95	17.90	16.25		22.21	44.489	24.00	-1.79	Target

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Measurement Results for Maximum Conducted Output Power

Specification Limits

FCC, Part 15 §15.407 (a)(1), (a)(2) and Industry Canada RSS-210 § A9.2(2)

(a)(1) For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or +4 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

(a)(2) For the 5.25-5.35 and 5470-5725 MHz GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or +11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-210 §A9.2(2)

For the band 5150-5250 MHz, the maximum equivalent isotropically radiated power (e.i.r.p.) shall not exceed 200 mW or 10 + 10 log₁₀ B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

For the band 5250-5350 MHz and 5470-5725 MHz, the maximum conducted output power shall not exceed 250 mW or 11 + 10 log₁₀ B, dBm, whichever power is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log₁₀ B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

Traceability

Test Equipment Used

0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 41 of 196

Peak Power Spectral Density

Conducted Test Conditions for Power Spectral Density			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Power Spectral Density	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)	Pressure (mBars):	999 - 1001
Reference Document(s):	KDB 789033 - D01 DTS General UNII Test Procedures v01		
Test Procedure for Power Spectral Density			
The In-Band power spectral density was measured using the measure and sum approach per FCC KDB 662911 (D01 Multiple Transmitter Output v01.)			
<u>Measure and sum the spectra across the outputs.</u> With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with N transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were calculated on a computer, and the results read back into the spectrum analyzer as a data file to produce a representative plot of total spectral power density.			
Calculated Power = $A + 10 \log (1/x)$ dBm			
A = Total Power Spectral Density [10 Log ₁₀ (10a/10 + 10 b/10 + 10c/10 + 10d/10)]			
x = Duty Cycle			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 42 of 196

Equipment Configuration for Peak Power Spectral Density

Variant:	802.11a	Duty Cycle (%):	100
Data Rate:	6.0 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density Σ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5260.0	7.113	5.335	5.062		10.707	11.0	-0.3
5300.0	6.521	6.013	4.924		10.640	11.0	-0.4
5320.0	6.727	6.226	5.348		10.908	11.0	-0.1

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	± 2.81 dB

Equipment Configuration for Peak Power Spectral Density

Variant:	802.11a	Duty Cycle (%):	100
Data Rate:	6.0 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density Σ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5500.0	6.230	6.379	5.638		10.865	11.0	-0.1
5580.0	5.829	5.610	4.295		10.067	11.0	-0.9
5700.0	5.584	5.854	4.180		10.037	11.0	-1.0

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	± 2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 43 of 196

Equipment Configuration for Peak Power Spectral Density

Variant:	802.11n HT-20	Duty Cycle (%):	100
Data Rate:	6.5 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density Σ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
	MHz	a	b	c			
5260.0	7.065	5.773	5.835		11.038	11.0	0.0 <small>NOTE 1</small>
5300.0	6.885	5.898	5.225		10.828	11.0	-0.2
5320.0	6.573	6.677	5.333		11.007	11.0	0.0 <small>NOTE 1</small>

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	± 2.81 dB

NOTE¹:

It may be observed that spectrum in some plots break the limit line however this in itself does NOT constitute a failure. In this case a summation plot for all spectrum plots is provided to prove compliance. A failure occurs only after the summation of all spectrum plots have been summed and are found to be greater than the limit line.

Power Spectral Density Summation A+B+C+D

Equipment Configuration for Peak Power Spectral Density

Variant:	802.11n HT-20	Duty Cycle (%):	100
Data Rate:	6.5 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Frequency	Measured Power Spectral Density	Limit	Margin
	Port(s) (dBm/MHz)		
MHz	Summation A+B+C+D	dBm/MHz	dB
5260.0	10.984	11.0	-0.016
5300.0	10.757	11.0	-0.243
5320.0	10.992	11.0	-0.008

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	± 2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 44 of 196

Equipment Configuration for Peak Power Spectral Density

Variant:	802.11n HT-20	Duty Cycle (%):	100
Data Rate:	6.5 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density Σ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5500.0	5.810	5.941	5.177		10.426	11.0	-0.6
5580.0	5.757	5.752	4.412		10.123	11.0	-0.9
5700.0	5.971	6.447	4.185		10.409	11.0	-0.6

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	± 2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 45 of 196

Equipment Configuration for Peak Power Spectral Density

Variant:	802.11n HT-40	Duty Cycle (%):	100
Data Rate:	13.5 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density Σ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5270.0	4.932	3.219	3.003		8.578	11.0	-2.4
5310.0	5.503	4.436	3.328		9.284	11.0	-1.7

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Equipment Configuration for Peak Power Spectral Density

Variant:	802.11n HT-40	Duty Cycle (%):	100
Data Rate:	13.5 MBit/s	Antenna Gain (dBi):	3.00
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Calculated Power Spectral Density Σ Port(s)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5510.0	4.668	4.832	3.500		9.144	11.0	-1.9
5550.0	4.669	4.229	2.962		8.783	11.0	-2.2
5670.0	3.967	3.770	1.956		8.092	11.0	-2.9

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 46 of 196

Specification

FCC, Part 15 §15.407 (a)(1), (a)(2)

5150 – 5250 MHz

(a)(1) The peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

5250 – 5350 MHz & 5470 – 5725 MHz

(a)(2) The peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-210 § A9.2(1), A9.2(2)

5150 – 5250 MHz

§ **A9.2(1)** The eirp spectral density shall not exceed +10 dBm in any 1 MHz band

5250 – 5350 MHz & 5470 – 5725 MHz

§ **A9.2(2)** The power spectral density shall not exceed +11 dBm in any 1 MHz band

Traceability

Test Equipment Used

0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117
--

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 47 of 196

6.1.1.3. Peak Excursion Ratio

Conducted Test Conditions for Peak Excursion Ratio			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Peak Excursion Ratio	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a)(6)	Pressure (mBars):	999 - 1001
Reference Document(s):	KDB 789033 - D01 DTS General UNII Test Procedures v01		

Test Procedure for Peak Excursion Ratio

Compliance with the peak excursion requirement is demonstrated by confirming the ratio of the maximum of the peak-hold spectrum to the maximum of the average spectrum during continuous transmission. Section F) of KDB 789033 was used in order to prove compliance. This is a conducted measurement using a spectrum analyzer using dual traces. Peak Excursion Ratio is the difference in amplitude (dB) between both traces; The following identifies two spectrum traces on the same plot. Trace 1 is the max hold Peak detector, and Trace 2 is the recalled trace data from Peak Power Spectral Density measurements. Each frequency and operational mode is recalled in order to prove compliance.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 48 of 196

Equipment Configuration for Peak Excursion Ratio

Variant:	802.11a	Duty Cycle (%):	100
Data Rate:	6.0 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Peak Excursion (dB)				Ratio (dB)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5260.0	8.44				8.44	8.44	13.0	-4.56

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Equipment Configuration for Peak Excursion Ratio

Variant:	802.11a	Duty Cycle (%):	100
Data Rate:	6.0 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Peak Excursion (dB)				Ratio (dB)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5500.0	8.74				8.74	8.74	13.0	-4.26

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 49 of 196

Equipment Configuration for Peak Excursion Ratio

Variant:	802.11n HT-20	Duty Cycle (%):	100
Data Rate:	6.5 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Peak Excursion (dB)				Ratio (dB)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5260.0	8.82				8.82	8.82	13.0	-4.18

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Equipment Configuration for Peak Excursion Ratio

Variant:	802.11n HT-20	Duty Cycle (%):	100
Data Rate:	6.5 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Peak Excursion (dB)				Ratio (dB)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5500.0	9.83				9.83	9.83	13.0	-3.17

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 50 of 196

Equipment Configuration for Peak Excursion Ratio

Variant:	802.11n HT-40	Duty Cycle (%):	100
Data Rate:	13.5 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Peak Excursion (dB)				Ratio (dB)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5270.0	9.97				9.97	9.97	13.0	-3.03

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Equipment Configuration for Peak Excursion Ratio

Variant:	802.11n HT-40	Duty Cycle (%):	100
Data Rate:	13.5 MBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OFDM	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Peak Excursion (dB)				Ratio (dB)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5510.0	9.14				9.14	9.14	13.0	-3.86

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 51 of 196

Specification

Limits

§15.407 (a)(6) The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified in this paragraph) shall not exceed 13dB across any 1MHz bandwidth or the emission bandwidth whichever is less

Traceability

Test Equipment Used

0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117
--

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 52 of 196

6.1.1.4. Frequency Stability

FCC, Part 15 Subpart C §15.407(g)
Industry Canada RSS-210 §2.1

Test Procedure

The manufacturer of the equipment is responsible for ensuring that the frequency stability is such that emissions are always maintained within the band of operation under all conditions.

Manufacturer Declaration

The frequency stability of the reference oscillator sets the frequency stability of the RF transceiver signals. Therefore all of the RF signals should have ± 20 ppm stability.

This stability accounts for room temp tolerance of the crystal oscillator circuit, frequency variation across temperature, and crystal ageing.

± 20 ppm at 5.250 GHz translates to a maximum frequency shift of ± 105 KHz. As the edge of the channels is at least one MHz from either of the band edges, ± 105 KHz is more than sufficient to guarantee that the intentional emission will remain in the band over the entire operating range of the EUT.

Specification

Limits

§15.407 (g) Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



6.1.2. Radiated Emission Testing

FCC, Part 15 Subpart C §15.407(b)(2), §15.205(a)/15.209(a)
Industry Canada RSS-210 §A9.3(2); §2.2; §2.6; RSS-Gen §4.7

Test Procedure

Testing was performed in a 3-meter anechoic chamber. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. Preliminary emissions were recorded with in Spectrum Analyzer mode, using a maximum peak detector while in peak hold mode. Depending on the frequency band spanned a notch filter and/or waveguide filter was used to remove the fundamental frequency.

Emissions nearest the limits were chosen for maximization and formal measurement using a CISPR compliant receiver. Emissions above 1000 MHz are measured utilizing a CISPR compliant average detector with a tuned receiver, using a bandwidth of 1 MHz. Emissions from 30 MHz – 1000 MHz are measured utilizing a CISPR compliant quasi-peak detector with a tuned receiver, using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

FS = Field Strength
R = Measured Spectrum analyzer Input Amplitude
AF = Antenna Factor

$$CORR = \text{Correction Factor} = CL - AG + NFL$$

CL = Cable Loss
AG = Amplifier Gain
FO = Distance Falloff Factor
NFL = Notch Filter Loss or Waveguide Loss

Field Strength Calculation Example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$\begin{aligned} 40 \text{ dB}\mu\text{V/m} &= 100 \mu\text{V/m} \\ 48 \text{ dB}\mu\text{V/m} &= 250 \mu\text{V/m} \end{aligned}$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 54 of 196

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dB μ V/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dB μ V/m

Note: The data in this Section identifies that the EUT is in compliance with the -27dBm/MHz EIRP limit (68.23 dB μ V/m) for out of band emissions. All out of band emissions are less than 68.23 dB μ V/m.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 55 of 196

Specification

Radiated Spurious Emissions

15.407 (b)(2). All emissions outside of the 5,150-5,350MHz band shall not exceed an EIRP of -27dBm/MHz.

FCC §15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

FCC §15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

FCC §15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

RSS-210 §A9.3(2) For transmitters operating in the 5250-5350 MHz band, all emissions outside the 5150-5350 MHz band shall not exceed -27 dBm/MHz e.i.r.p. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band shall not exceed out of band emission limit of 27 dBm/MHz e.i.r.p. in the 5150-5250 MHz band in order to operate indoor/outdoor, or alternatively shall comply with the spectral power density for operation within the 5150-5250 MHz band and shall be labeled "for indoor use only".

RSS-Gen §4.7 The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate of carrier frequency), or from 30 MHz, whichever is the lowest frequency, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

RSS-Gen §6 Receiver Spurious Emission Standard

If a radiated measurement is made, all spurious emissions shall comply with the limits of the following Table. The resolution bandwidth of the spectrum analyzer shall be 100 kHz for spurious emission measurements below 1.0 GHz and 1.0 MHz for measurements above 1.0 GHz



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 56 of 196

Table 1: FCC 15.209 Spurious Emissions Limits

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Traceability:


Test Equipment Used
0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



6.1.2.1. Radiated Spurious - Integral Antenna

Test Freq.	5260 MHz	Engineer	SB
Variants	802.11a; 6 Mbs	Temp (°C)	22.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	36
Power Setting	Target	Press. (mBars)	1005
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1	EUT Position = Vertical; AC/DC Adapter on table; Ethernet cables plugged into EUT;		
Test Notes 2			

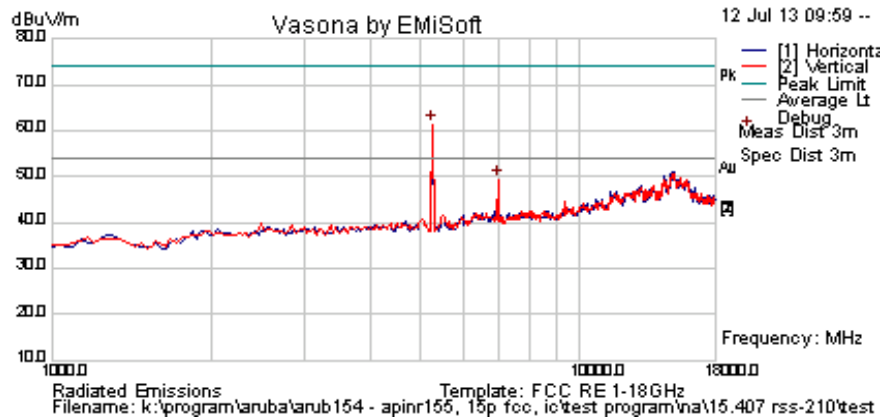

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5258.517	66.4	4.8	-9.7	61.5	Peak [Scan]	V	100	0				FUND
6995.991	50.1	5.7	-6.4	49.4	Peak [Scan]	V	150	0				NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 58 of 196

Test Freq.	5300 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	22.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	36
Power Setting	Target	Press. (mBars)	1005
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1	EUT Position = Vertical; AC/DC Adapter on table; Ethernet cables plugged into EUT;		
Test Notes 2			

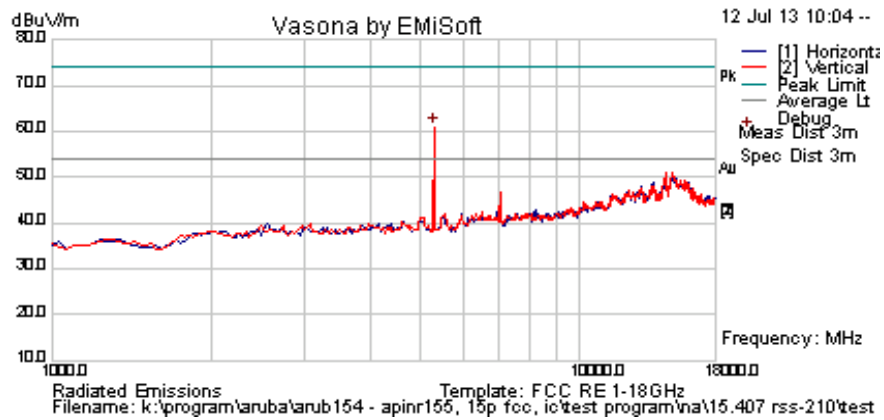

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5292.585	65.7	4.8	-9.6	61.0	Peak [Scan]	V	100	0				FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 59 of 196

Test Freq.	5320 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	22.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	36
Power Setting	Target	Press. (mBars)	1005
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1	EUT Position = Vertical; AC/DC Adapter on table; Ethernet cables plugged into EUT;		
Test Notes 2			

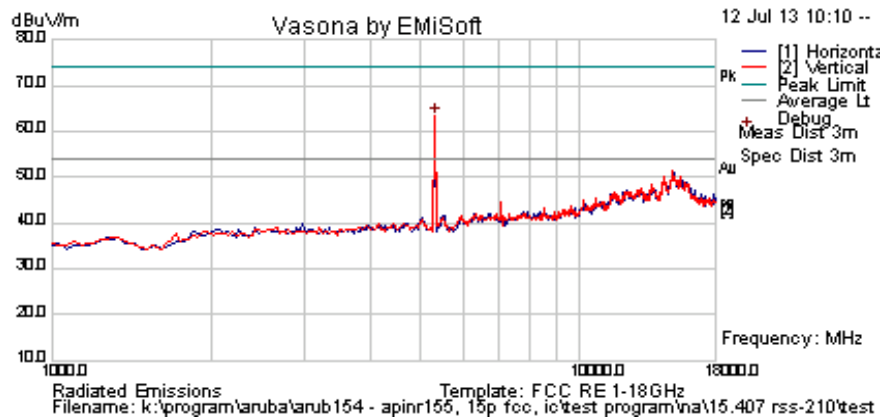

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5326.653	68.0	4.9	-9.5	63.4	Peak [Scan]	V	100	0				FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 60 of 196

Test Freq.	5500 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	22.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	36
Power Setting	Target	Press. (mBars)	1005
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1	EUT Position = Vertical; AC/DC Adapter on table; Ethernet cables plugged into EUT;		
Test Notes 2			

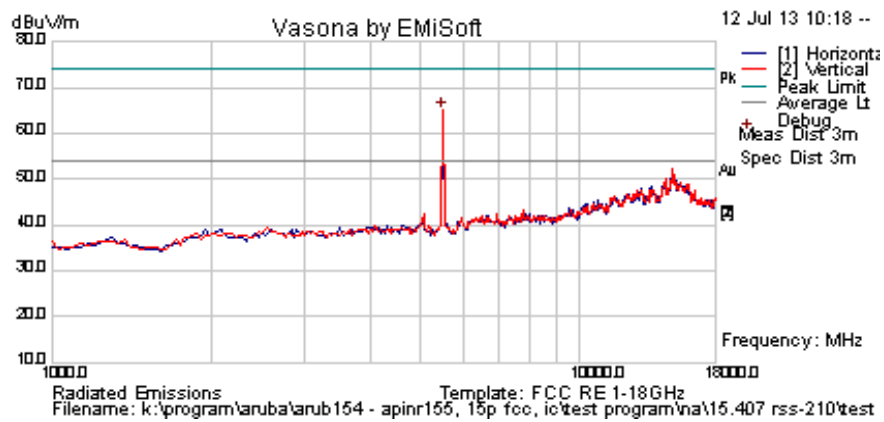

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5496.994	69.7	5.0	-9.6	65.1	Peak [Scan]	V	100	0				FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 61 of 196

Test Freq.	5580 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	22.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	36
Power Setting	Target	Press. (mBars)	1005
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1	EUT Position = Vertical; AC/DC Adapter on table; Ethernet cables plugged into EUT;		
Test Notes 2			

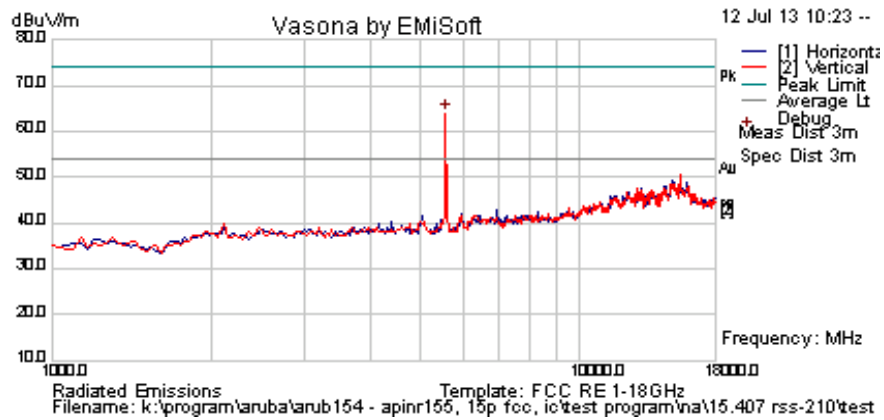

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5565.130	68.8	4.9	-9.7	64.0	Peak [Scan]	V	100	0				FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 62 of 196

Test Freq.	5700 MHz	Engineer	SB
Variant	802.11a; 6 Mbs	Temp (°C)	22.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	36
Power Setting	Target	Press. (mBars)	1005
Antenna	Integral	Duty Cycle (%)	100
Test Notes 1	EUT Position = Vertical; AC/DC Adapter on table; Ethernet cables plugged into EUT;		
Test Notes 2			

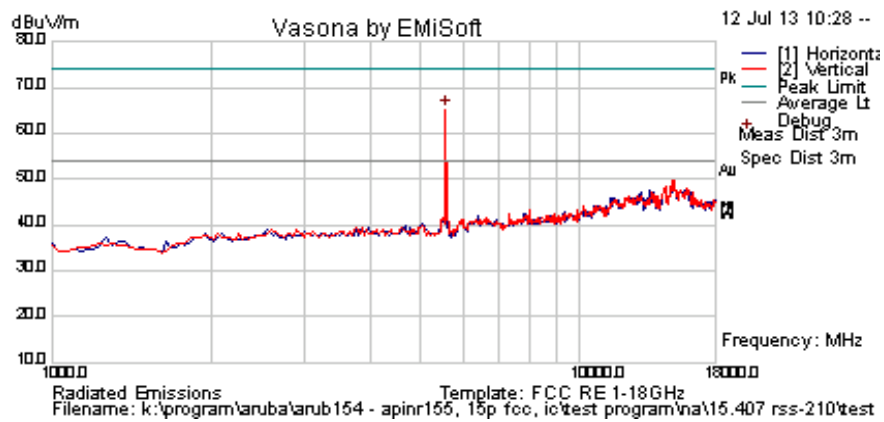

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5565.130	70.0	4.9	-9.7	65.2	Peak [Scan]	V	100	0				FUND
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



6.1.2.2. Integral Antenna - Radiated Band-Edge

Peak Limit 74.0 dB μ V, Peak Limit 54.0 dB μ V


5350 MHz				
		dB μ V		Power Setting
Operational Mode	Peak	Average		
a	64.12	41.30	Target	
n HT-20	65.34	43.66	Target	
n HT-40	70.79	51.96	Target	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 64 of 196

11a mode 5350 MHz band edge

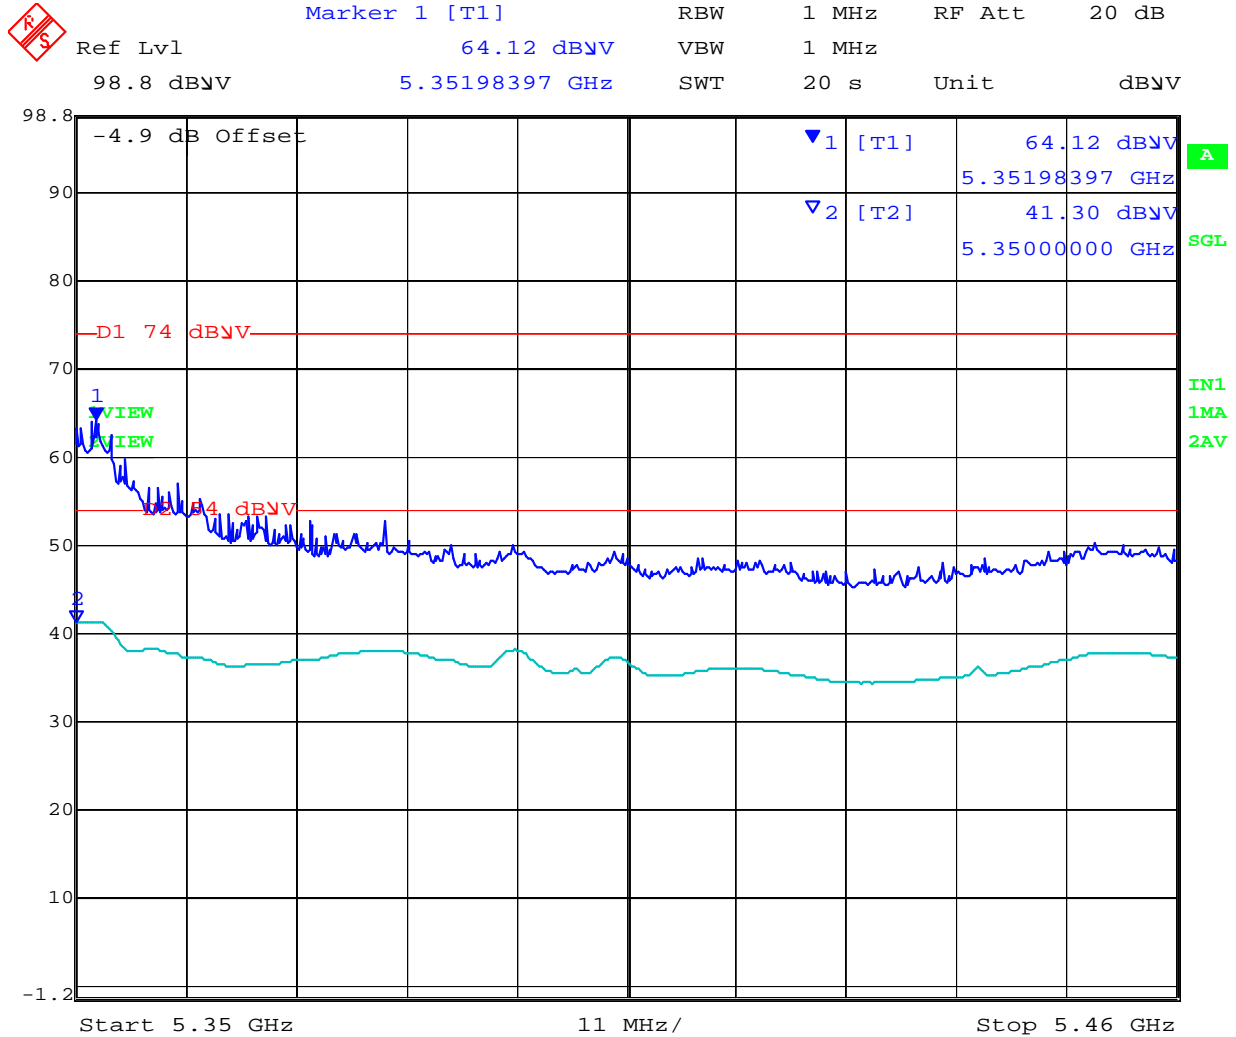

Date: 2.AUG.2013 11:20:49

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



11n HT-20 mode 5350 MHz band edge



Date: 2.AUG.2013 11:22:10

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



11n HT-40 mode 5350 MHz band edge




Date: 2.AUG.2013 11:24:57

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Operational Mode	5460 MHz		
	Peak	Average	Power Setting
a	65.57	42.60	Target
n HT-20	63.01	40.16	Target
n HT-40	70.71	49.16	Target

11a mode 5460 MHz band edge

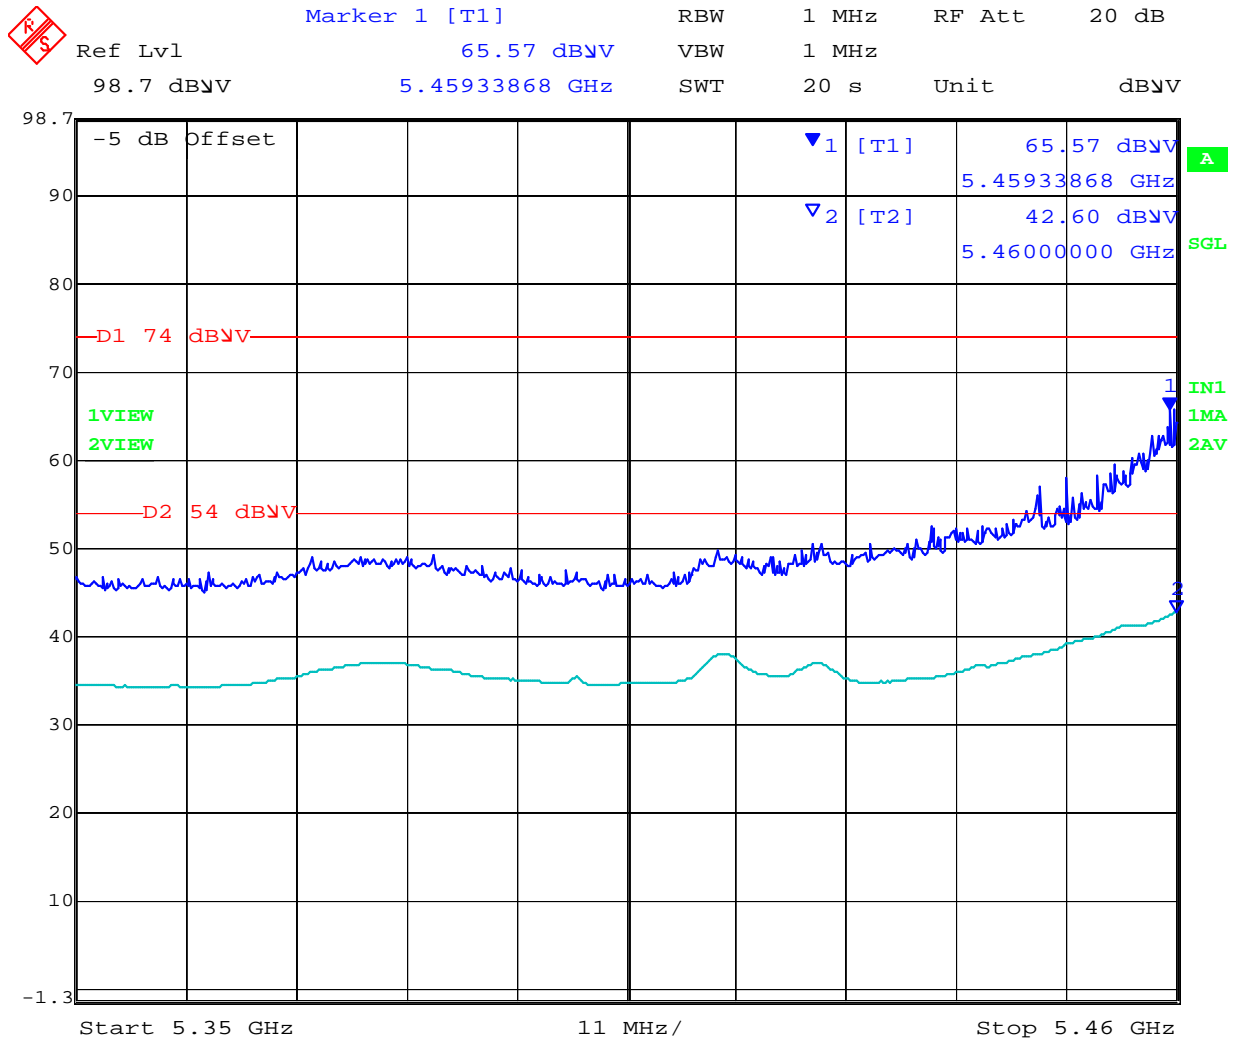


Date: 2.AUG.2013 11:35:31

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



11n HT-20 mode 5460 MHz band edge

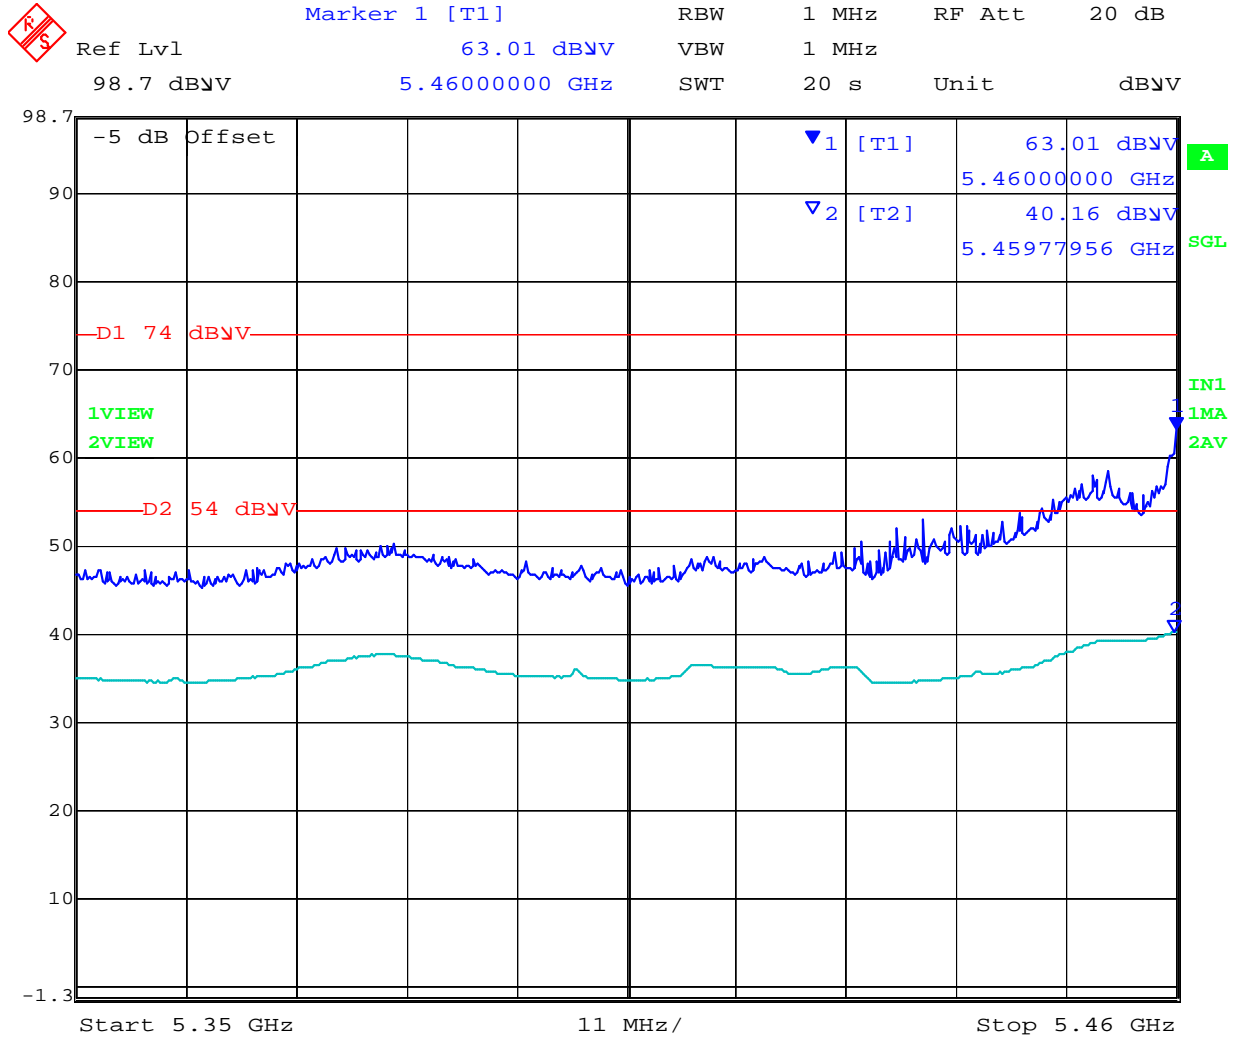


Date: 2.AUG.2013 11:33:37

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



11n HT-40 mode 5460 MHz band edge

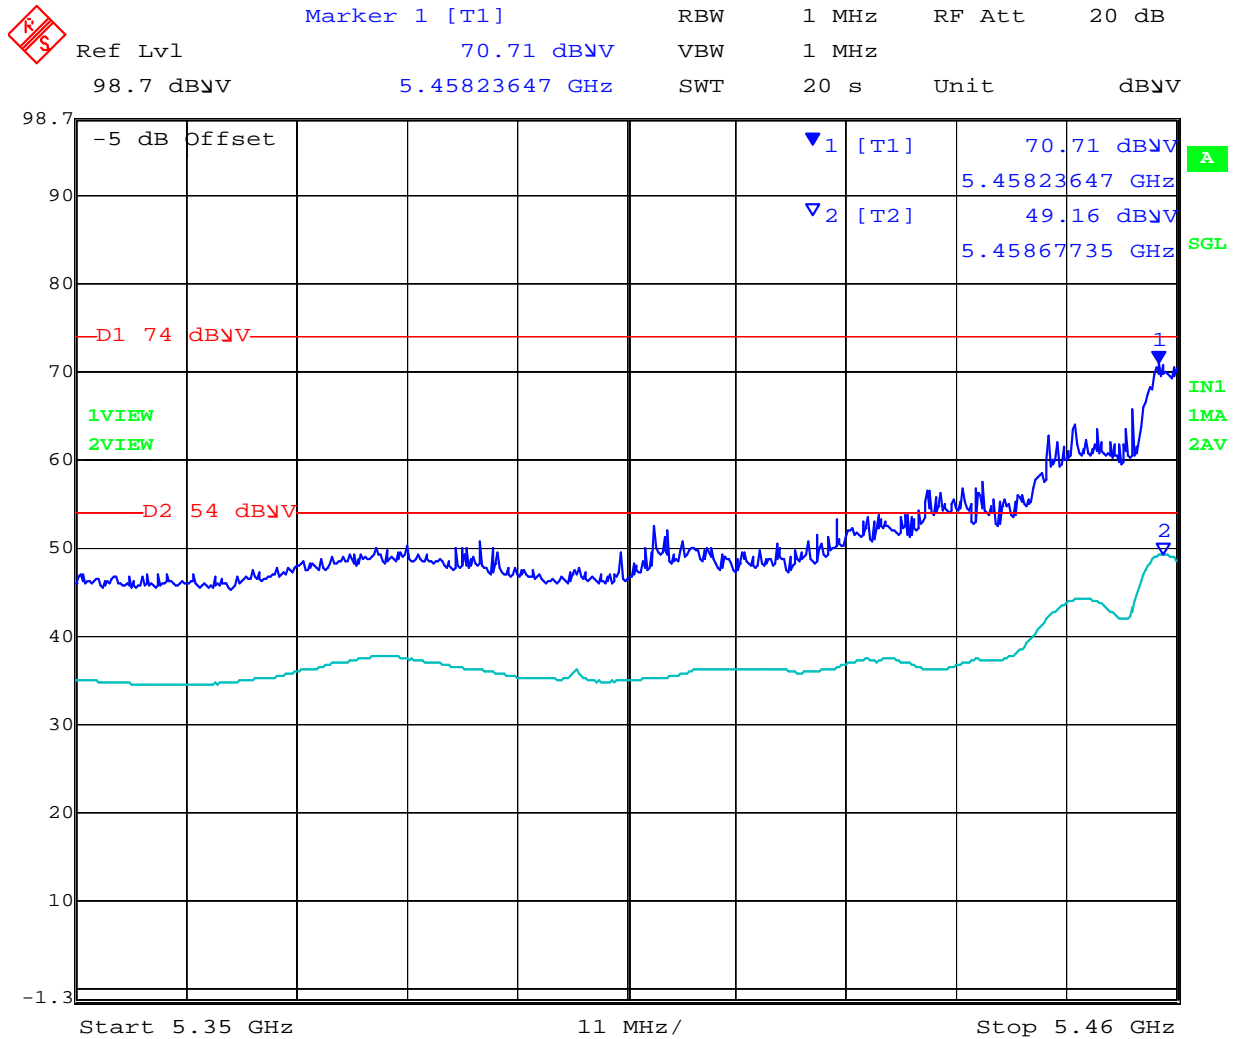

Date: 2.AUG.2013 11:30:32

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



6.1.2.3. Digital Emissions (30M-1 GHz)

FCC, Part 15 Subpart C §15.205/ §15.209
Industry Canada RSS-210 §2.2

Test Procedure

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

The EUT had two methods of powering on ac/dc converter and Power over Ethernet (POE). Both modes were tested for emissions below 1GHz.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength
R = Measured Receiver Input Amplitude
AF = Antenna Factor
CORR = Correction Factor = CL – AG + NFL
CL = Cable Loss
AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$


$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



APINR155

Test Freq.	NA	Engineer	SB
Variant	Digital Emissions	Temp (°C)	22
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	33
Power Setting	Target	Press. (mBars)	1003
Antenna	Integral		
Test Notes 1	EUT Position = Vertical; AC/DC Power Supply 120VAC/12VDC.		
Test Notes 2			

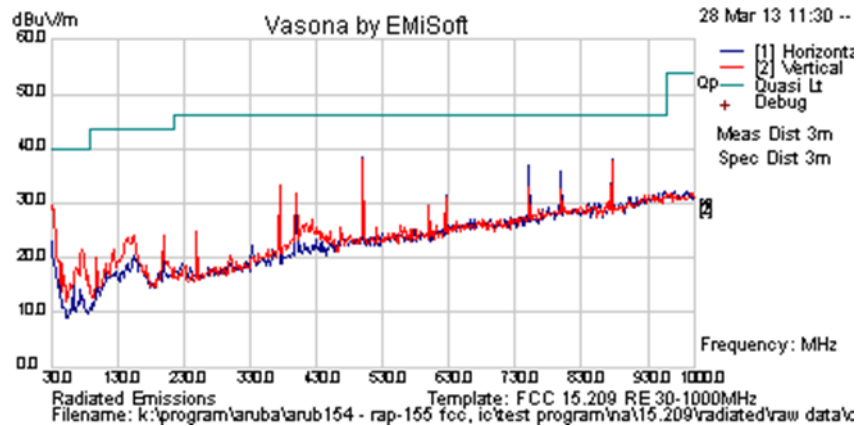

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
500.368	44.8	5.8	-12.8	37.8	Peak [Scan]	V	98	360	46	-8.2	Pass	
799.846	37.7	6.9	-8.9	35.7	Peak [Scan]	H	98	360	46	-10.3	Pass	
32.563	37.6	3.5	-11.7	29.4	Peak [Scan]	V	98	360	40	-10.6	Pass	
751.531	37.8	6.7	-9.4	35.2	Peak [Scan]	H	98	360	46	-10.9	Pass	
373.966	42.5	5.4	-15.3	32.6	Peak [Scan]	V	98	360	46	-13.4	Pass	
154.782	38.7	4.4	-18.9	24.2	Peak [Scan]	V	98	360	43.5	-19.3	Pass	


Legend:
 DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency
 NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



APINR155

Test Freq.	NA	Engineer	SB
Variant	Digital Emissions	Temp (°C)	22
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	33
Power Setting	Target	Press. (mBars)	1003
Antenna	Integral		
Test Notes 1	EUT Position = Horizontal; AC/DC Power Supply 120VAC/12VDC.		
Test Notes 2			

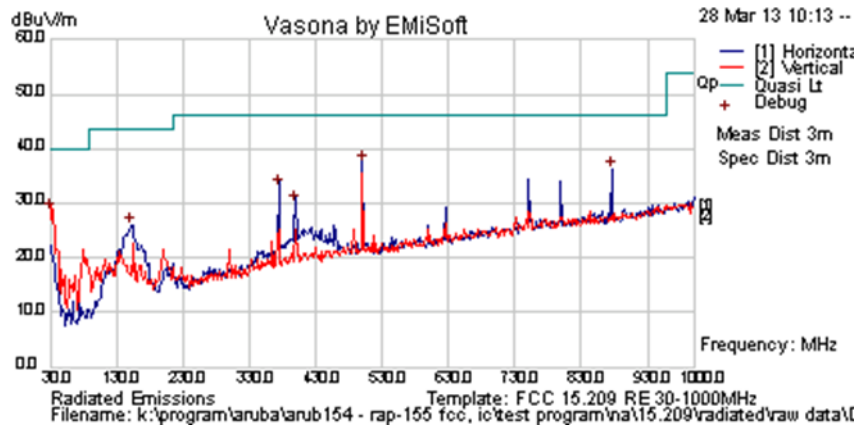

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
500.585	44.1	5.8	-12.8	37.0	Peak [Scan]	H	98	360	46.0	-9.0	Pass	
875.546	37.2	7.1	-8.1	36.2	Peak [Scan]	H	98	360	46.0	-9.8	Pass	
30.970	35.5	3.5	-10.6	28.4	Peak [Scan]	V	98	360	40.0	-11.6	Pass	
374.341	42.6	5.4	-15.4	32.6	Peak [Scan]	H	98	360	46.0	-13.4	Pass	
399.644	39.1	5.5	-14.8	29.8	Peak [Scan]	H	98	360	46.0	-16.2	Pass	
151.735	40.2	4.4	-18.9	25.8	Peak [Scan]	H	98	360	43.5	-17.7	Pass	
Legend:	DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency											
	NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band											


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 73 of 196

EUT APINR-15P

Test Freq.	NA	Engineer	SB
Variant	Digital Emissions	Temp (°C)	22
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	33
Power Setting	Target	Press. (mBars)	1003
Antenna	Integral		
Test Notes 1	EUT Position = Vert; AC/DC Power Supply 120VAC/54VDC (Sunny Switching Adapter SYS1443-5454-T3)		
Test Notes 2	POE Port 1 & 2 active (two separate units powered up under turn table); Port 3 & 4 active via ENET		

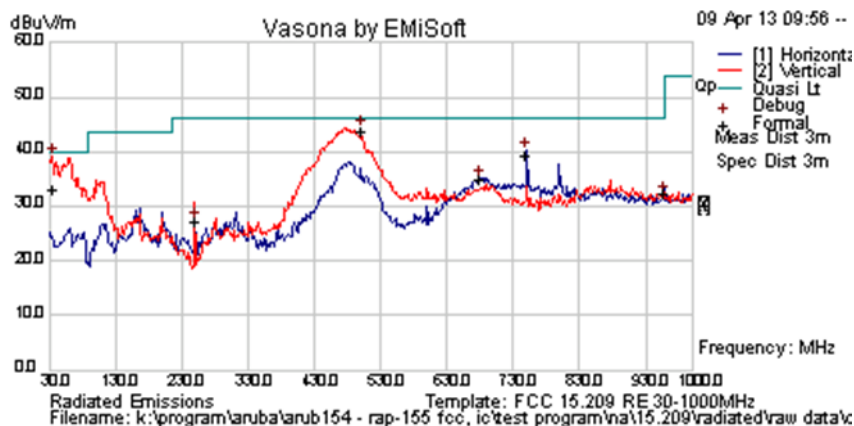

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
35.118	43.3	3.6	-13.7	33.3	Quasi Max	V	138	271	40	-6.7	Pass	
499.999	49.3	5.8	-12.8	42.3	Quasi Peak	H	173	322	46	-3.7	Pass	
750.008	42.0	6.7	-9.4	39.2	Quasi Max	H	98	165	46	-6.8	Pass	
680.385	38.9	6.5	-10.4	34.9	Peak [Scan]	H	98	165	46	-11.1	Pass	
958.290	32.0	7.3	-7.1	32.2	Peak [Scan]	H	98	165	46	-13.8	Pass	
250.078	41.2	4.9	-19.0	27.1	Peak [Scan]	V	98	165	46	-18.9	Pass	


Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency
 NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



EUT APINR-15P

Test Freq.	NA	Engineer	SB
Variant	Digital Emissions	Temp (°C)	22
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	33
Power Setting	Target	Press. (mBars)	1003
Antenna	Integral		
Test Notes 1	EUT Position = Hor.; AC/DC Power Supply 120VAC/54VDC (Sunny Switching Adapter SYS1443-5454-T3)		
Test Notes 2	POE Port 1 & 2 active (two separate units powered up under turn table); Port 3 & 4 active via ENET		

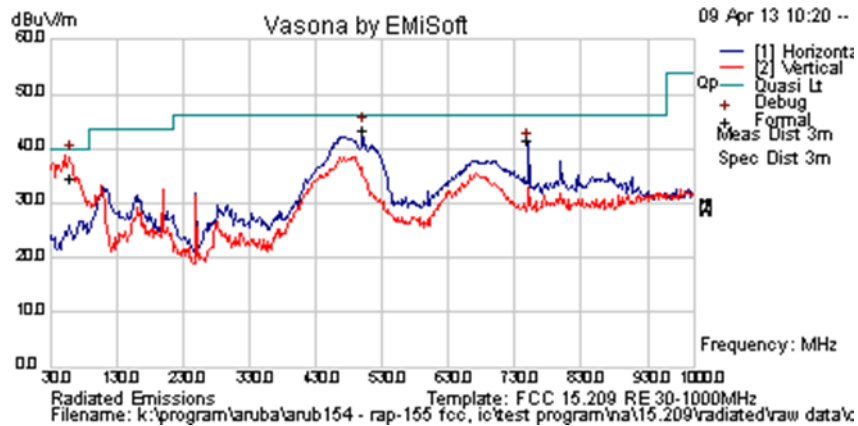

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
58.934	54.8	3.8	-24.1	34.4	Quasi Max	V	112	309	40.0	-5.6	Pass	
499.999	49.3	5.8	-12.8	42.3	Quasi Peak	H	173	322	46	-3.7	Pass	
750.015	44.2	6.7	-9.4	41.5	Quasi Max	H	119	0	46.0	-4.5	Pass	
680.385	38.9	6.5	-10.4	34.9	Peak [Scan]	H	98	165	46.0	-11.1	Pass	
958.290	32.0	7.3	-7.1	32.2	Peak [Scan]	H	98	165	46.0	-13.8	Pass	
250.078	41.2	4.9	-19.0	27.1	Peak [Scan]	V	98	165	46.0	-18.9	Pass	

Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency
 NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification

Limits

§15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

§15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

§15.209 (a) and RSS-Gen §2.2 Limit Matrix

Frequency(MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 76 of 196

6.1.3. AC Wireline Conducted Emissions (150 kHz – 30 MHz)

FCC, Part 15 Subpart C §15.207
Industry Canada RSS-Gen §7.2.2

Test Procedure

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)

Ambient conditions.


Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



APINR155

Test Freq.	N/A	Engineer	SB
Variant	AC Line Emissions	Temp (°C)	23
Freq. Range	0.150 MHz - 30 MHz	Rel. Hum.(%)	36
Power Setting	Target	Press. (mBars)	1005
Antenna	Integral		
Test Notes 1	EUT Position = Vertical; AC/DC Adapter on table; Ethernet cables plugged into EUT;		
Test Notes 2			

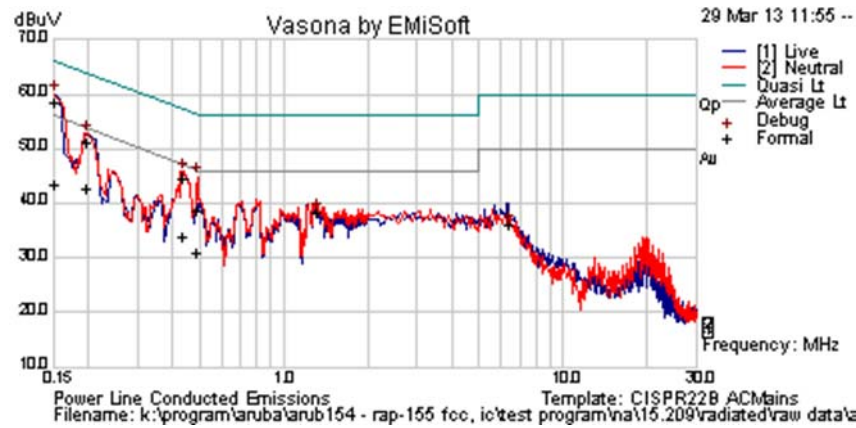

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
0.152	48.7	9.9	0.1	58.7	Quasi Peak	Neutral	65.9	-7.3	Pass	
0.199	41.3	9.9	0.1	51.3	Quasi Peak	Neutral	63.65	-12.4	Pass	
0.492	28.5	9.9	0.1	38.5	Quasi Peak	Neutral	56.13	-17.6	Pass	
0.437	34.6	9.9	0.1	44.6	Quasi Peak	Neutral	57.12	-12.6	Pass	
0.152	33.5	9.9	0.1	43.5	Average	Neutral	55.9	-12.4	Pass	
0.199	32.7	9.9	0.1	42.7	Average	Neutral	53.65	-11.0	Pass	
0.492	20.9	9.9	0.1	30.9	Average	Neutral	46.13	-15.3	Pass	
0.437	23.8	9.9	0.1	33.7	Average	Neutral	47.12	-13.4	Pass	
1.331	28.3	10.0	0.1	38.3	Peak [Scan]	Neutral	46	-7.7	Pass	
6.488	25.6	10.2	0.3	36.1	Peak [Scan]	Neutral	50	-13.9	Pass	

Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency
 NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 78 of 196

APINR-15P

Test Freq.	N/A	Engineer	SB
Variant	AC Line Emissions	Temp (°C)	23
Freq. Range	0.150 MHz - 30 MHz	Rel. Hum.(%)	36
Power Setting	Target	Press. (mBars)	1005
Antenna	Integral		
Test Notes 1	EUT Position = Hor; AC/DC Pwr Supply 120VAC/54VDC (Sunny Switching Adapter SYS1443-5454-T3)		
Test Notes 2	POE Port 1 & 2 active (two separate units powered up under turn table); Port 3 & 4 active via ENET		

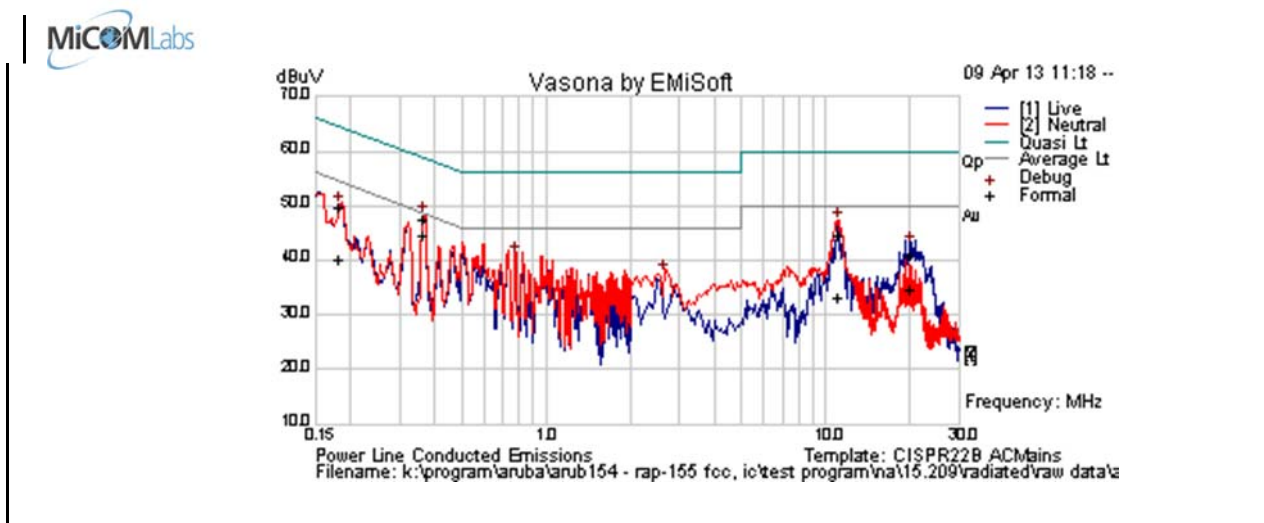

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
20.033	29.7	10.5	0.7	41.0	Quasi Peak	Live	60	-19.1	Pass	
0.368	37.5	9.9	0.1	47.5	Quasi Peak	Neutral	58.55	-11.1	Pass	
11.170	34.0	10.3	0.4	44.7	Quasi Peak	Neutral	60	-15.3	Pass	
0.184	39.8	9.9	0.1	49.8	Quasi Peak	Neutral	64.3	-14.5	Pass	
20.033	23.3	10.5	0.7	34.6	Average	Live	50	-15.4	Pass	
0.368	34.6	9.9	0.1	44.5	Average	Neutral	48.55	-4.0	Pass	
11.170	22.5	10.3	0.4	33.2	Average	Neutral	50	-16.8	Pass	
0.184	30.2	9.9	0.1	40.2	Average	Neutral	54.3	-14.1	Pass	
0.184	40.2	9.9	0.1	50.2	Peak [Scan]	Neutral	54.3	-4.1	Pass	
0.786	30.8	10.0	0.1	40.9	Peak [Scan]	Neutral	46	-5.2	Pass	
2.664	27.5	10.1	0.1	37.7	Peak [Scan]	Neutral	46	-8.3	Pass	

Legend:	DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency
	NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Specification

Limit

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu\Omega$ line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

RSS-Gen §7.2.2

The radio frequency voltage that is conducted back into the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The tighter limit applies at the frequency range boundaries.

§15.207 (a) and RSS-Gen §7.2.2 Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	± 2.64 dB
-------------------------	---------------


Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'	0158, 0184, 0287, 0190, 0293, 0307

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



7. PHOTOGRAPHS

7.1. Test Setup - Conducted

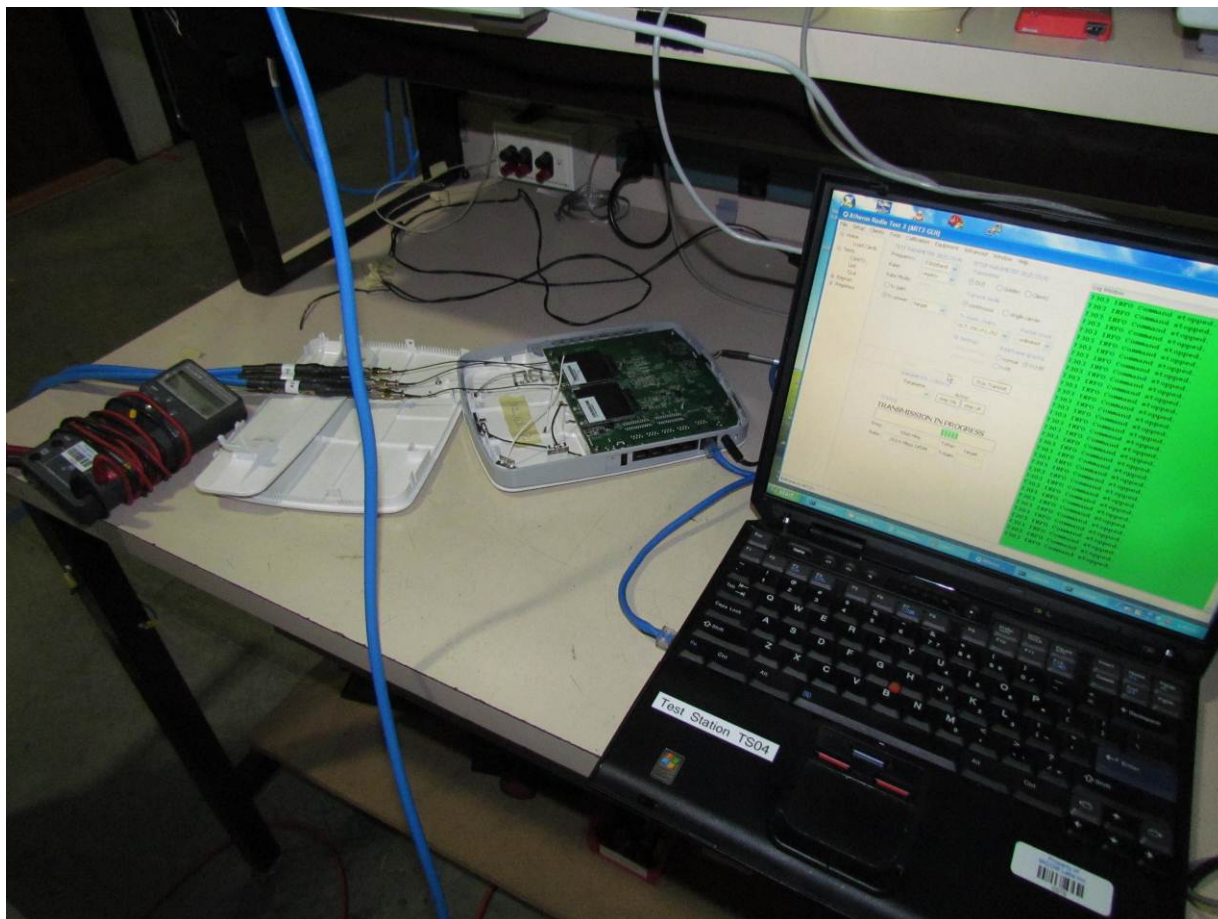


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

7.2. Test Setup - Digital Emissions below 1 GHz

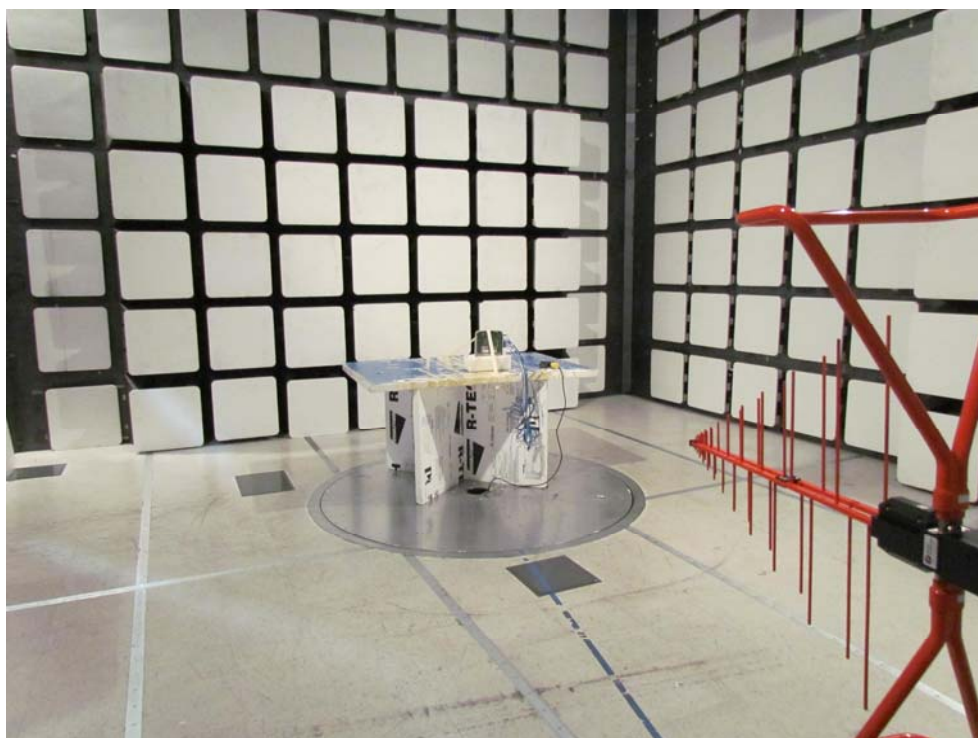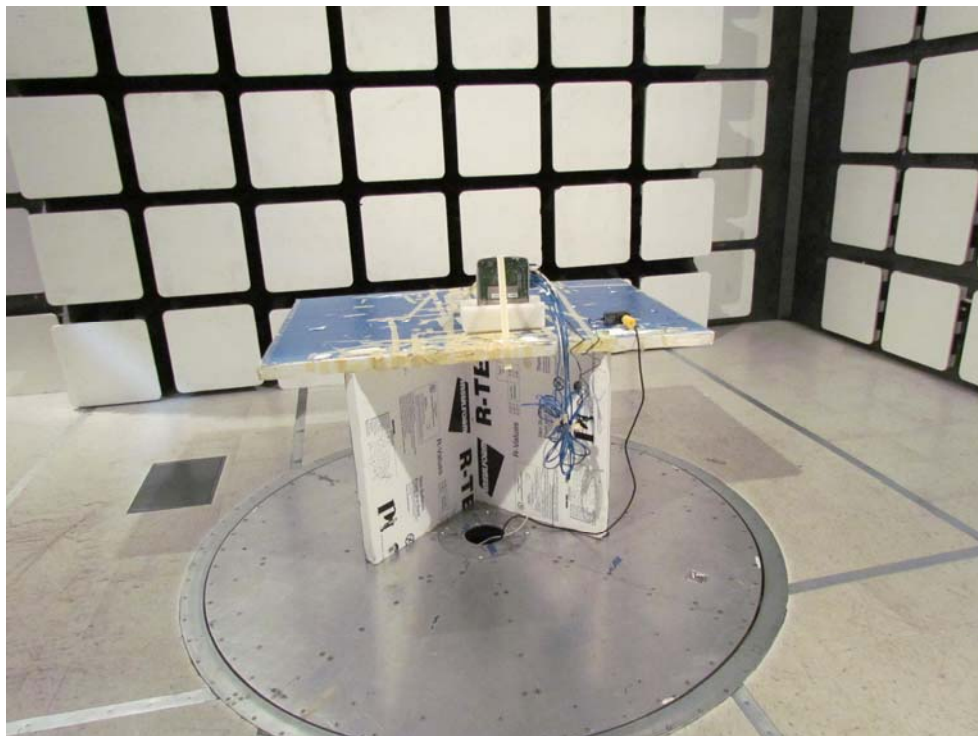

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

7.3. Radiated Emissions Test Setup >1 GHz

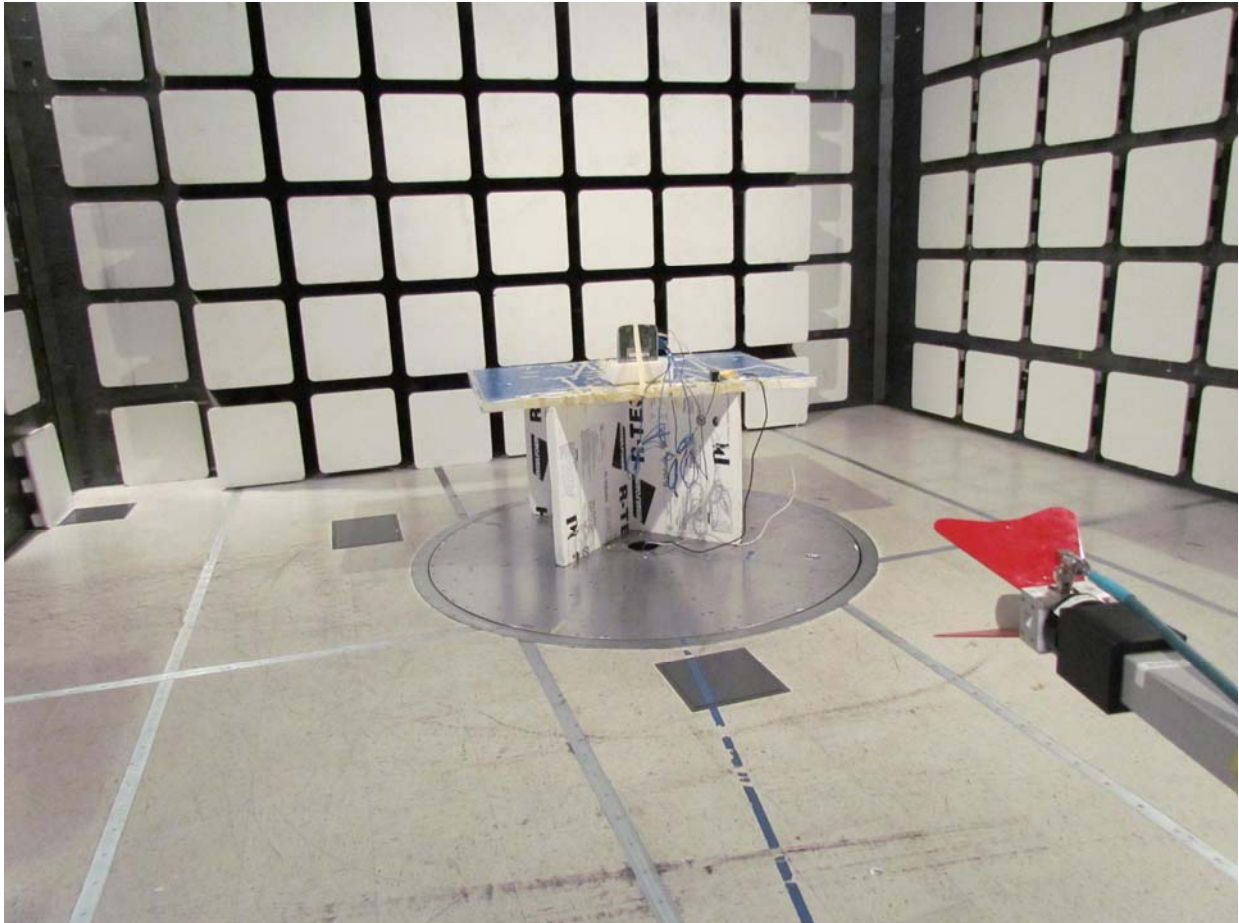

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 83 of 196

8. TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Serial #	Calibration Due Date
0070	Power Meter	Hewlett Packard	437B	3125U11552	28 th Nov 13
0117	Power Sensor	Hewlett Packard	8487D	3318A00371	15 th Nov 13
0223	Power Meter	Hewlett Packard	EPM-442A	US37480256	15 th Nov 13
0374	Power Sensor	Hewlett Packard	8485A	3318A19694	29 th Nov 13
0158	Barometer /Thermometer	Control Co.	4196	E2846	8 th Dec 13
0193	EMI Receiver	Rhode & Schwartz	ESI 7	838496/007	2 nd Dec 13
0287	EMI Receiver	Rhode & Schwartz	ESIB40	100201	16 th Nov 13
0338	30 - 3000 MHz Antenna	Sunol	JB3	A052907	8 th Nov 13
0335	1-18 GHz Horn Antenna	EMCO	3117	00066580	7 th Nov 13
0252	SMA Cable	Megaphase	Sucoflex 104	None	N/A
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001	N/A
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002	N/A
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001	N/A
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	209092-001	N/A
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623	N/A
	EMC Test Software	EMISoft	Vasona	5.0051	N/A
	RF Conducted Test Software	National Instruments	Labview	Version 8.2	N/A
	RF Conducted Test Software	MiCOM Labs ATS		Version 1.5	N/A

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 84 of 196

APPENDIX

A. SUPPORTING INFORMATION

A.1. CONDUCTED TEST PLOTS

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




A.1.1. 26 dB & 99% Bandwidth



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5260.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

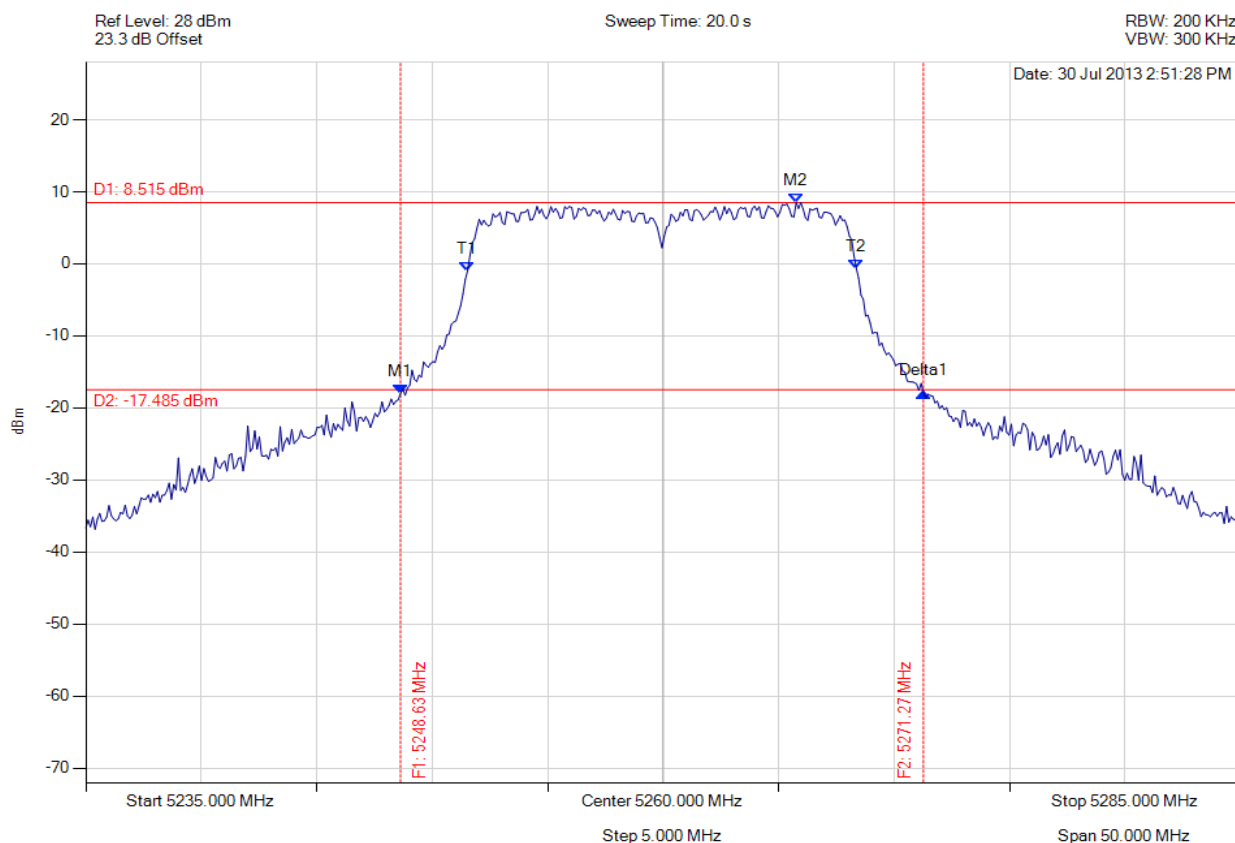

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5248.627 MHz : -17.993 dBm M2 : 5265.762 MHz : 8.515 dBm Delta1 : 22.645 MHz : 0.085 dB T1 : 5251.533 MHz : -0.965 dBm T2 : 5268.367 MHz : -0.658 dBm OBW : 16.834 MHz	Measured 26 dB Bandwidth: 22.645 MHz Measured 99% Bandwidth: 16.834 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5260.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

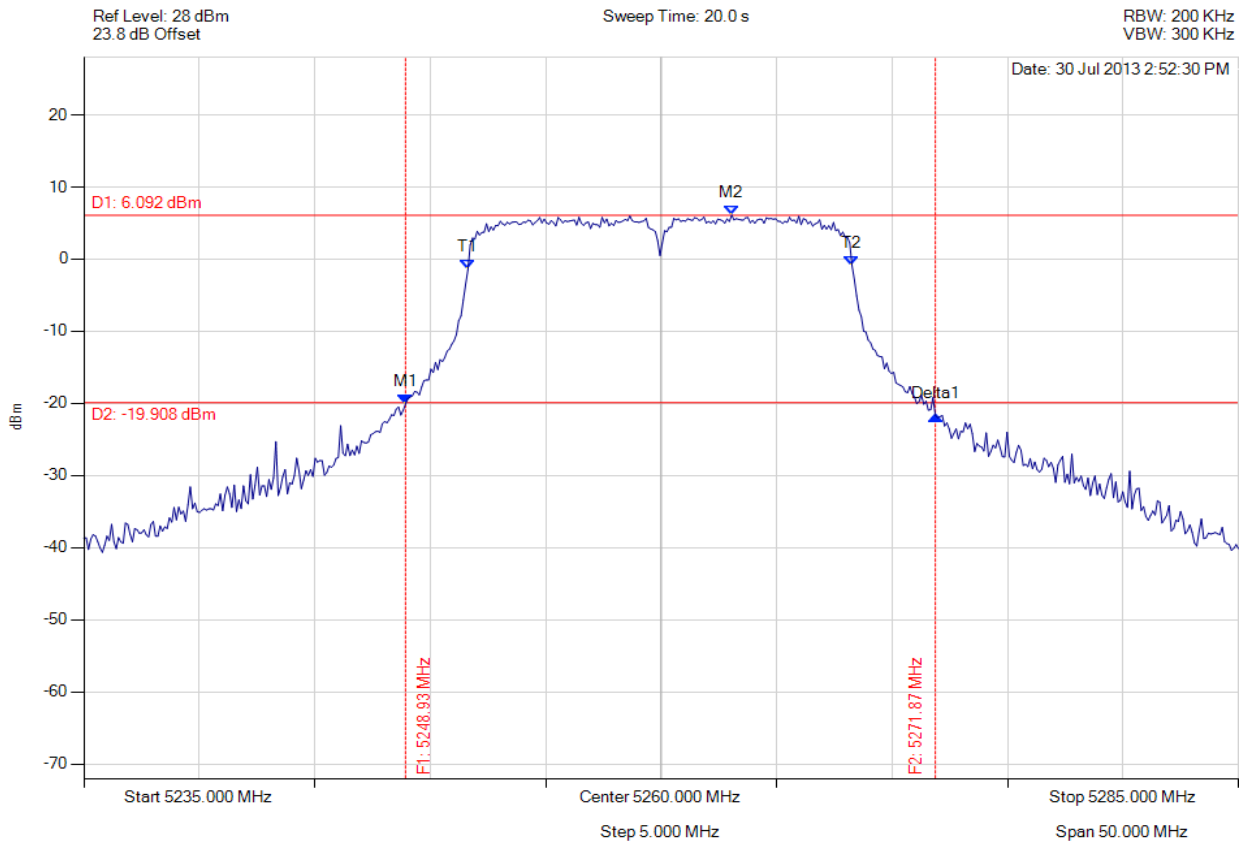

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5248.928 MHz : -20.110 dBm M2 : 5263.056 MHz : 6.092 dBm Delta1 : 22.946 MHz : -1.540 dB T1 : 5251.633 MHz : -1.443 dBm T2 : 5268.267 MHz : -0.889 dBm OBW : 16.633 MHz	Measured 26 dB Bandwidth: 22.946 MHz Measured 99% Bandwidth: 16.633 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5260.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

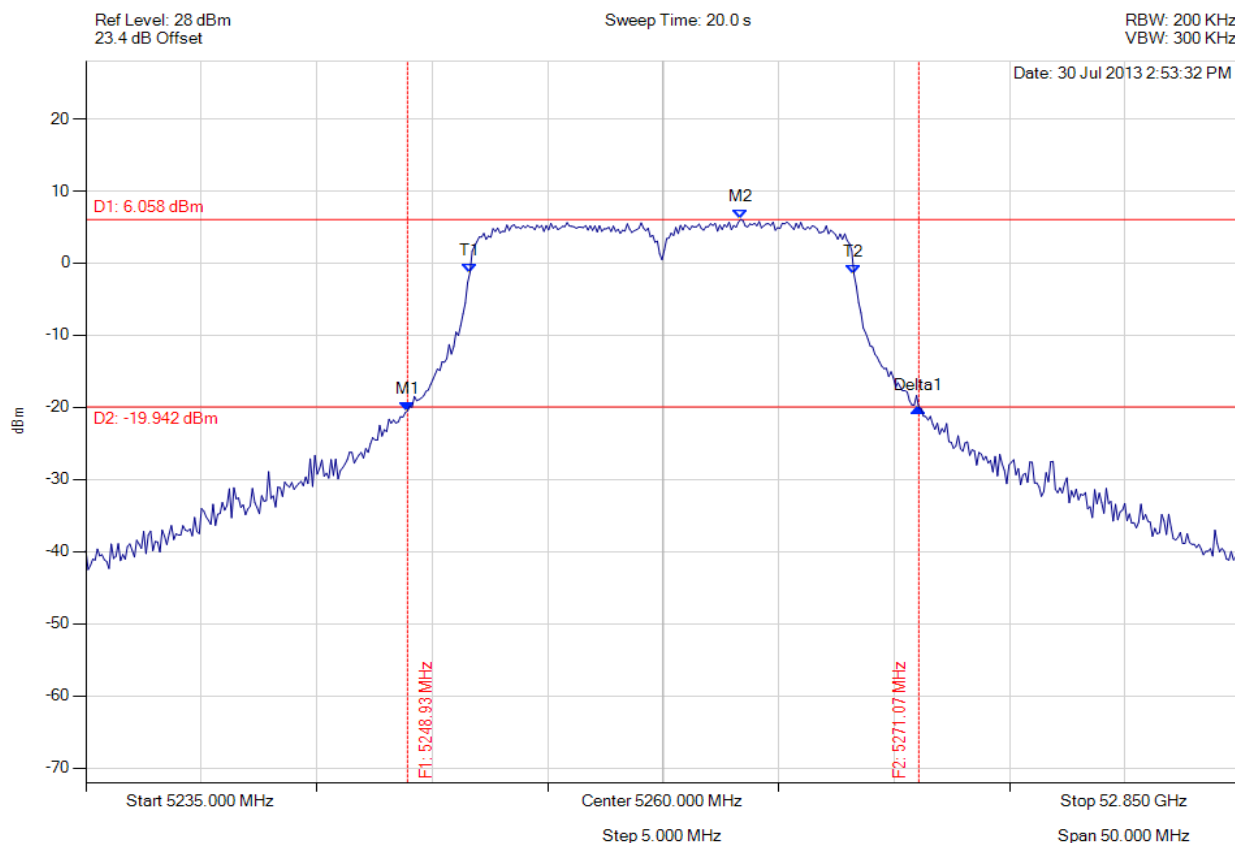

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5248.928 MHz : -20.482 dBm M2 : 5263.357 MHz : 6.058 dBm Delta1 : 22.144 MHz : 0.411 dB T1 : 5251.633 MHz : -1.323 dBm T2 : 5268.267 MHz : -1.563 dBm OBW : 16.633 MHz	Measured 26 dB Bandwidth: 22.144 MHz Measured 99% Bandwidth: 16.633 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5300.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

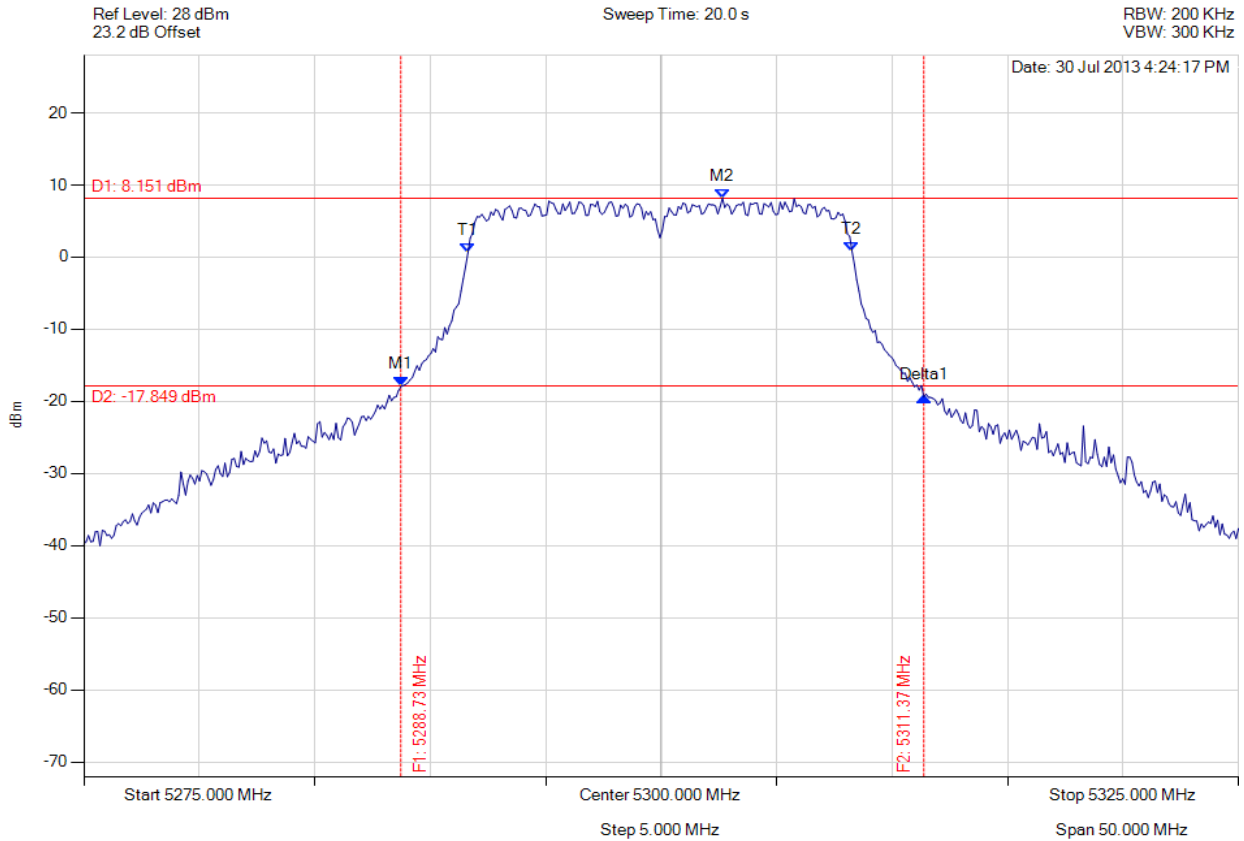

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5288.727 MHz : -17.948 dBm M2 : 5302.655 MHz : 8.151 dBm Delta1 : 22.645 MHz : -1.458 dB T1 : 5291.633 MHz : 0.603 dBm T2 : 5308.267 MHz : 0.835 dBm OBW : 16.633 MHz	Measured 26 dB Bandwidth: 22.645 MHz Measured 99% Bandwidth: 16.633 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5300.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

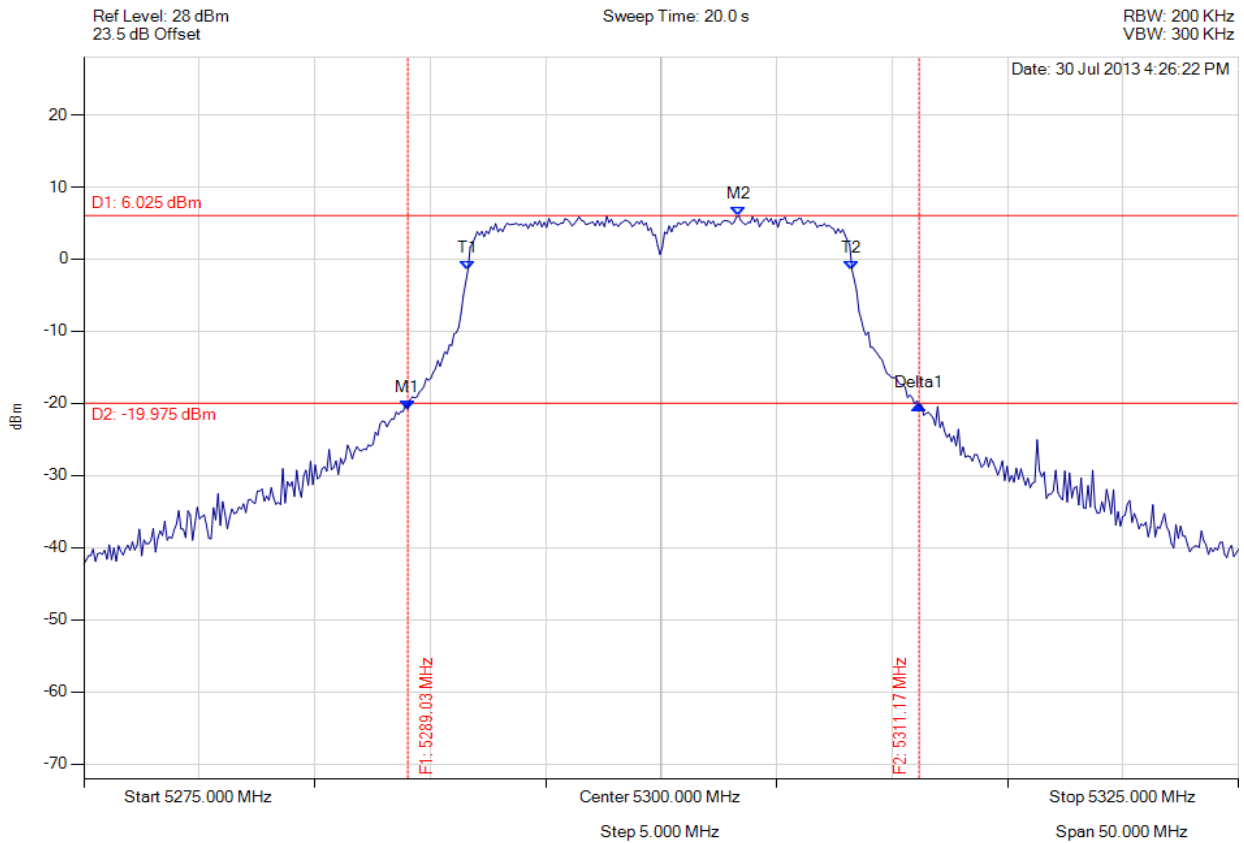

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5289.028 MHz : -20.814 dBm M2 : 5303.357 MHz : 6.025 dBm Delta1 : 22.144 MHz : 0.543 dB T1 : 5291.633 MHz : -1.540 dBm T2 : 5308.267 MHz : -1.504 dBm OBW : 16.633 MHz	Measured 26 dB Bandwidth: 22.144 MHz Measured 99% Bandwidth: 16.633 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5300.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

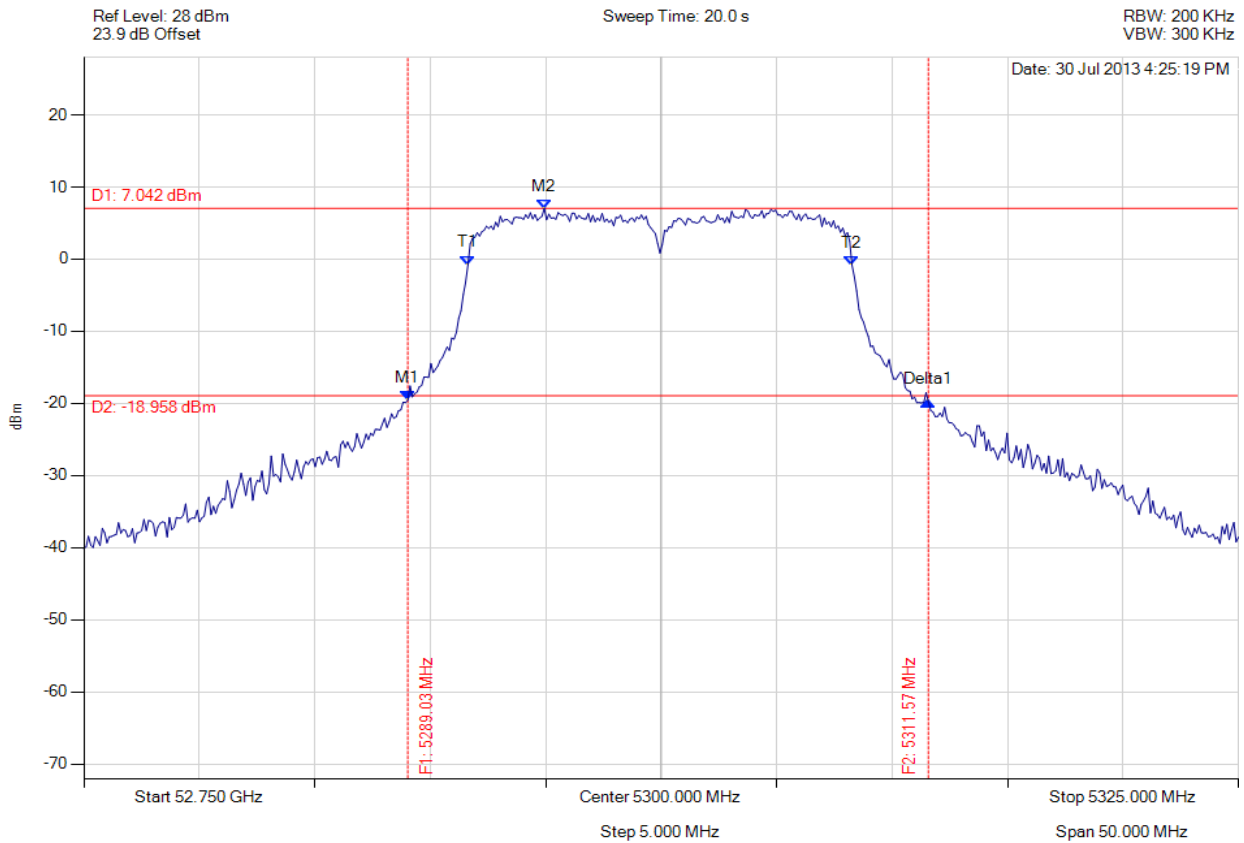

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5289.028 MHz : -19.588 dBm M2 : 5294.940 MHz : 7.042 dBm Delta1 : 22.545 MHz : -0.189 dB T1 : 5291.633 MHz : -0.792 dBm T2 : 5308.267 MHz : -0.841 dBm OBW : 16.633 MHz	Measured 26 dB Bandwidth: 22.545 MHz Measured 99% Bandwidth: 16.633 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5320.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

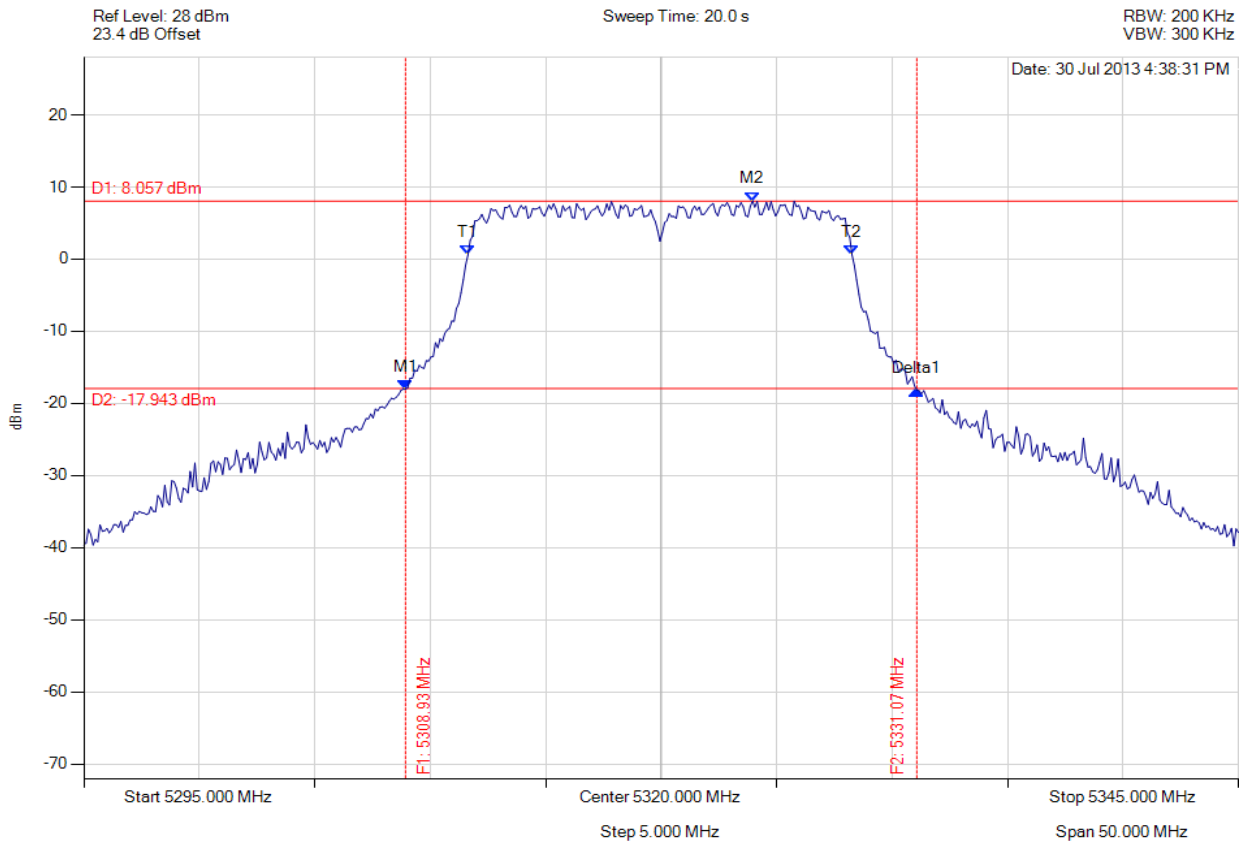

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5308.928 MHz : -18.048 dBm M2 : 5323.958 MHz : 8.057 dBm Delta1 : 22.144 MHz : -0.102 dB T1 : 5311.633 MHz : 0.577 dBm T2 : 5328.267 MHz : 0.603 dBm OBW : 16.633 MHz	Measured 26 dB Bandwidth: 22.144 MHz Measured 99% Bandwidth: 16.633 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5320.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

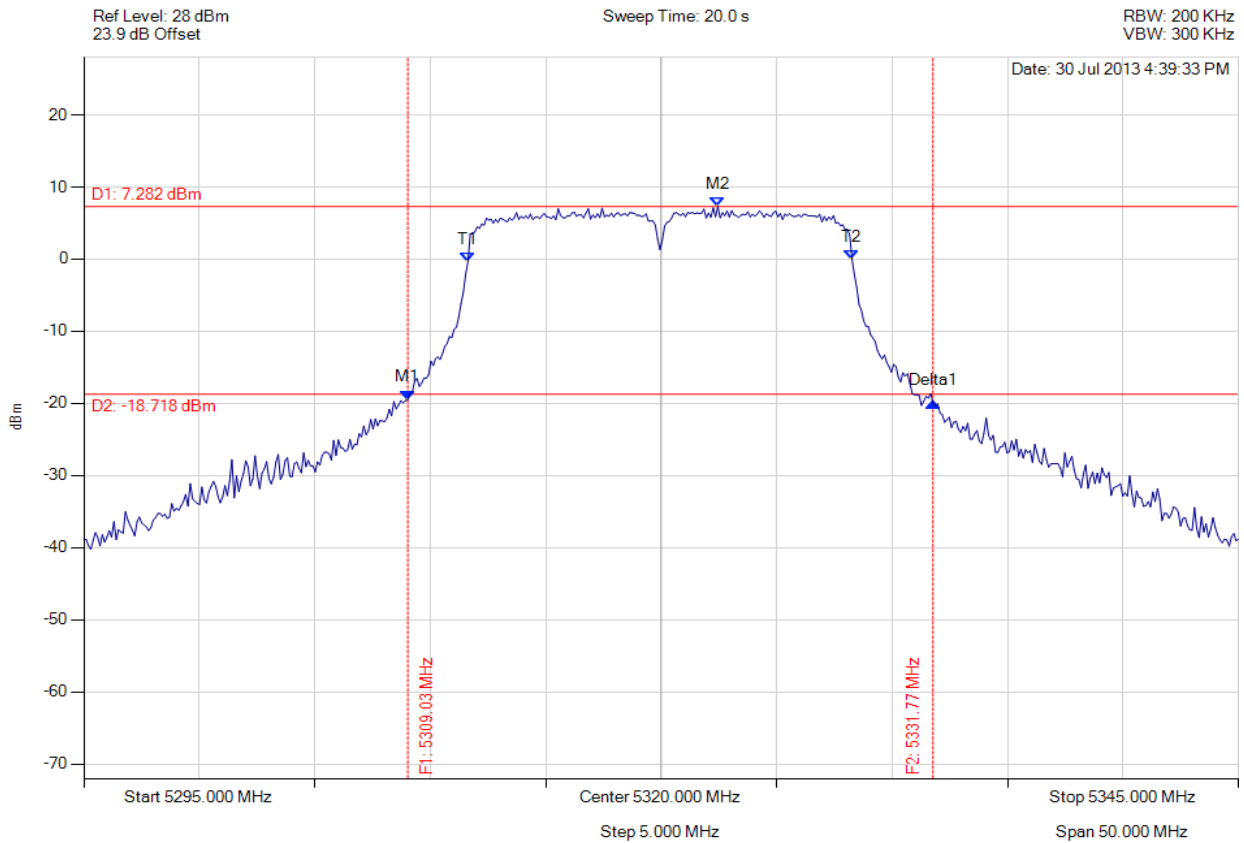

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5309.028 MHz : -19.466 dBm M2 : 5322.455 MHz : 7.282 dBm Delta1 : 22.745 MHz : -0.458 dB T1 : 5311.633 MHz : -0.371 dBm T2 : 5328.267 MHz : -0.007 dBm OBW : 16.633 MHz	Measured 26 dB Bandwidth: 22.745 MHz Measured 99% Bandwidth: 16.633 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5320.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

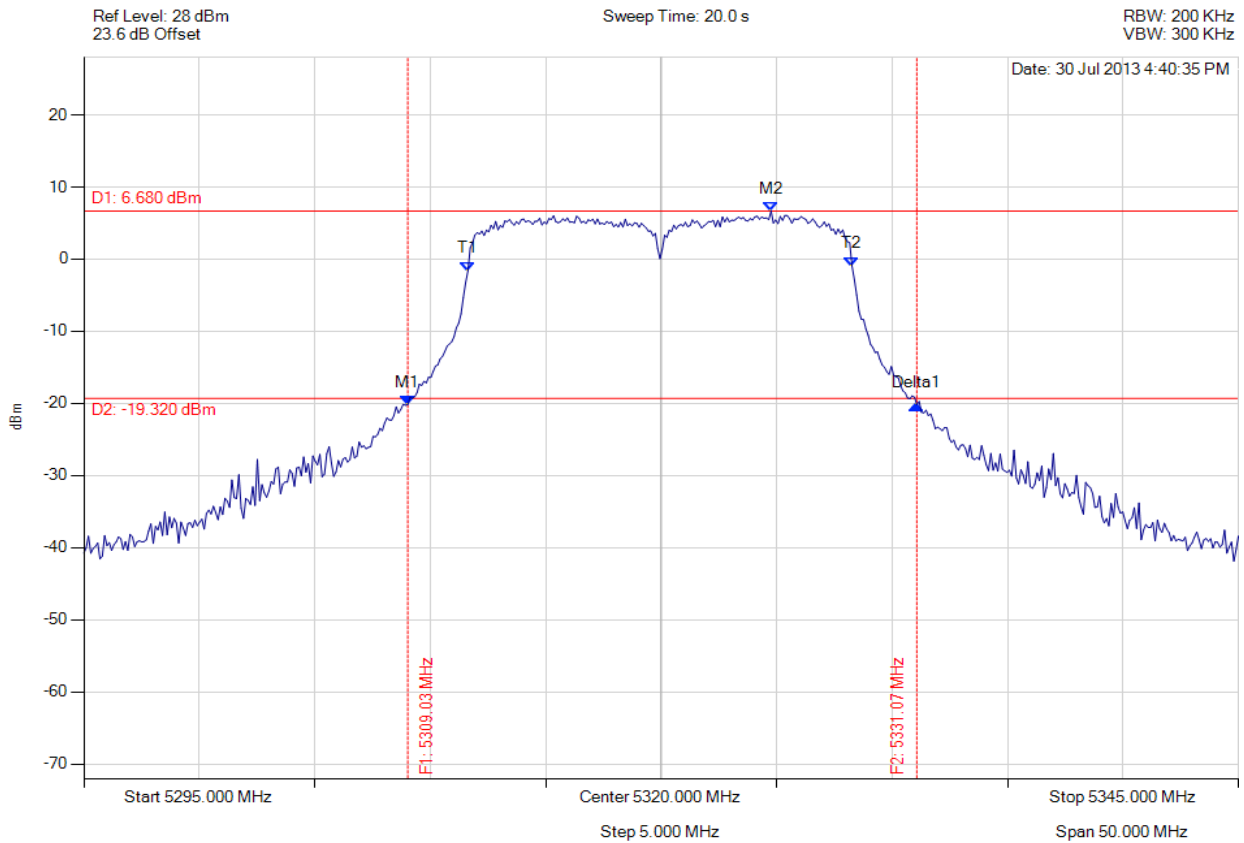

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5309.028 MHz : -20.177 dBm M2 : 5324.760 MHz : 6.680 dBm Delta1 : 22.044 MHz : -0.010 dB T1 : 5311.633 MHz : -1.619 dBm T2 : 5328.267 MHz : -0.959 dBm OBW : 16.633 MHz	Measured 26 dB Bandwidth: 22.044 MHz Measured 99% Bandwidth: 16.633 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5500.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

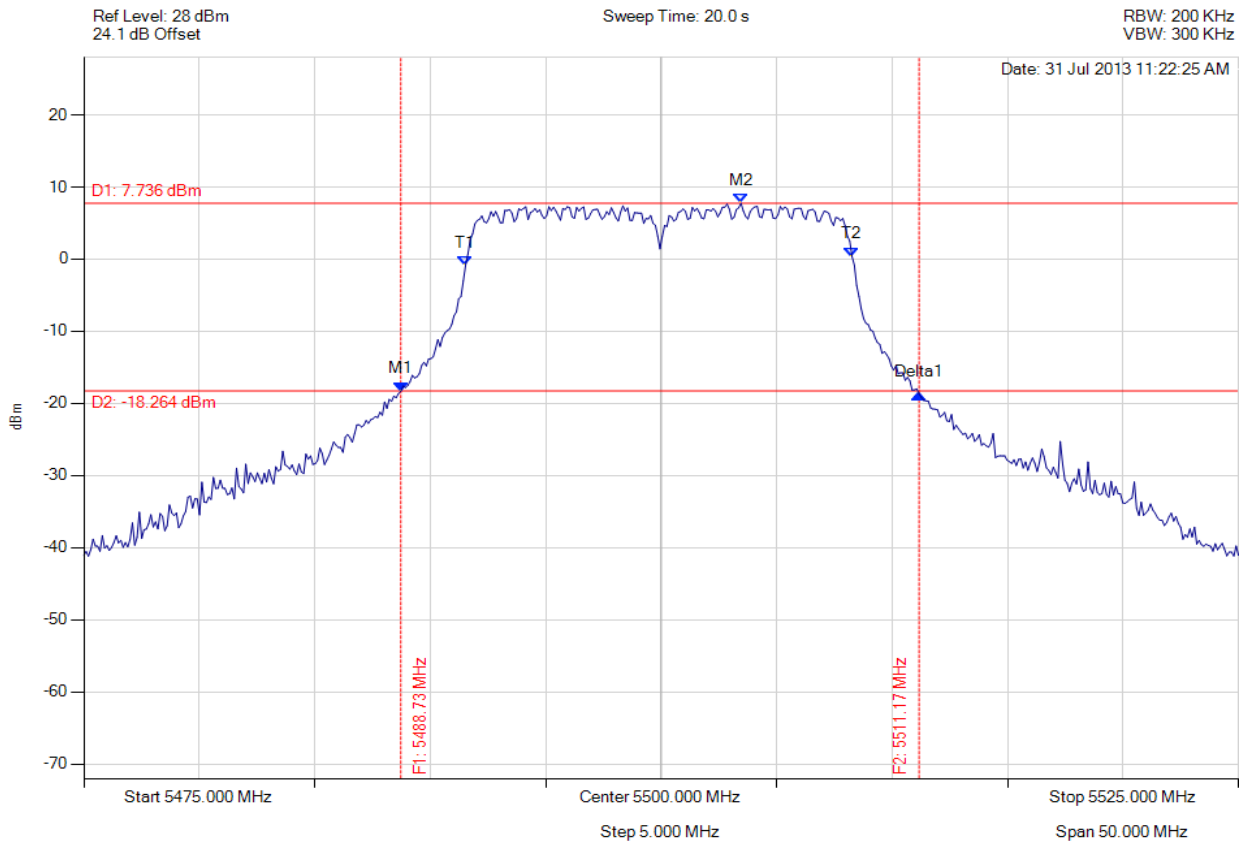

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5488.727 MHz : -18.304 dBm M2 : 5503.457 MHz : 7.736 dBm Delta1 : 22.445 MHz : -0.417 dB T1 : 5491.533 MHz : -0.822 dBm T2 : 5508.267 MHz : 0.380 dBm OBW : 16.733 MHz	Measured 26 dB Bandwidth: 22.445 MHz Measured 99% Bandwidth: 16.733 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5500.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

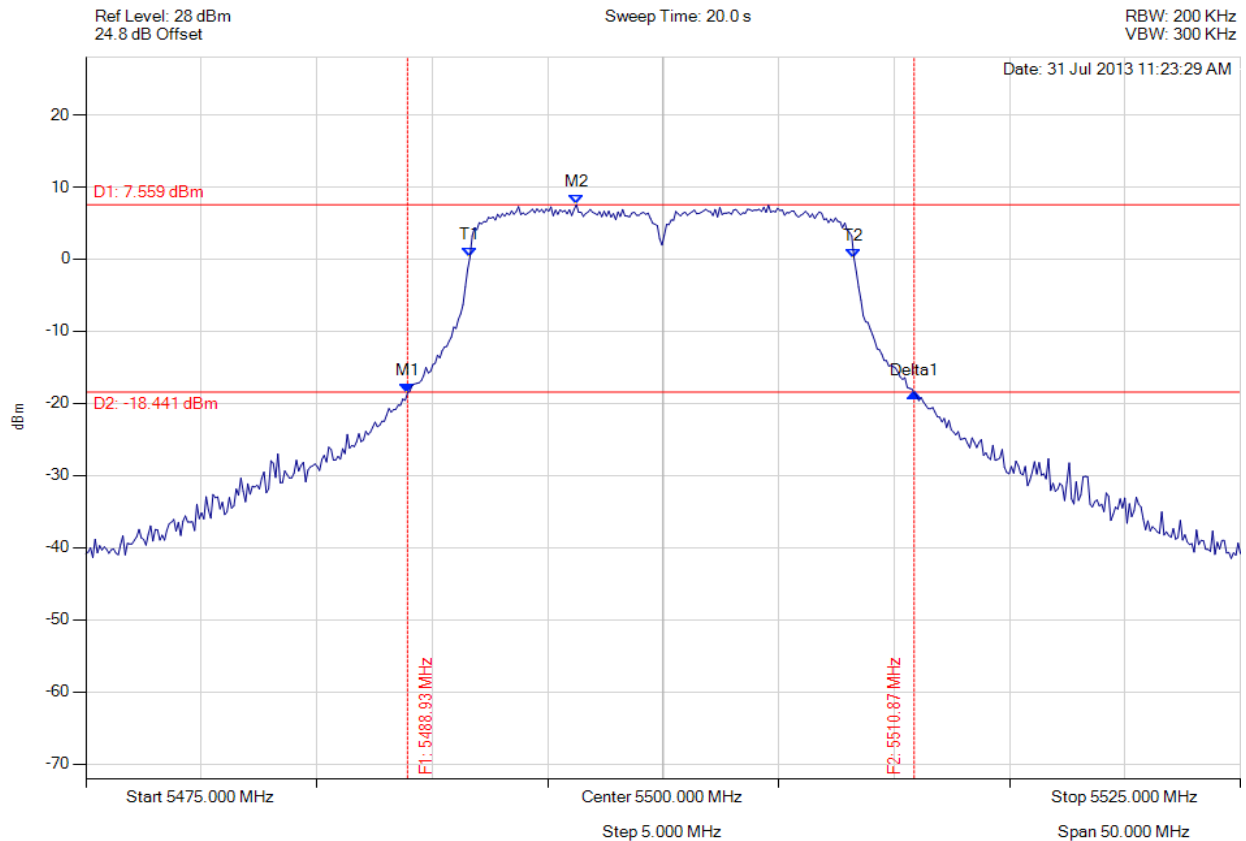

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5488.928 MHz : -18.575 dBm M2 : 5496.242 MHz : 7.559 dBm Delta1 : 21.944 MHz : 0.041 dB T1 : 5491.633 MHz : 0.266 dBm T2 : 5508.267 MHz : 0.156 dBm OBW : 16.633 MHz	Measured 26 dB Bandwidth: 21.944 MHz Measured 99% Bandwidth: 16.633 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5500.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

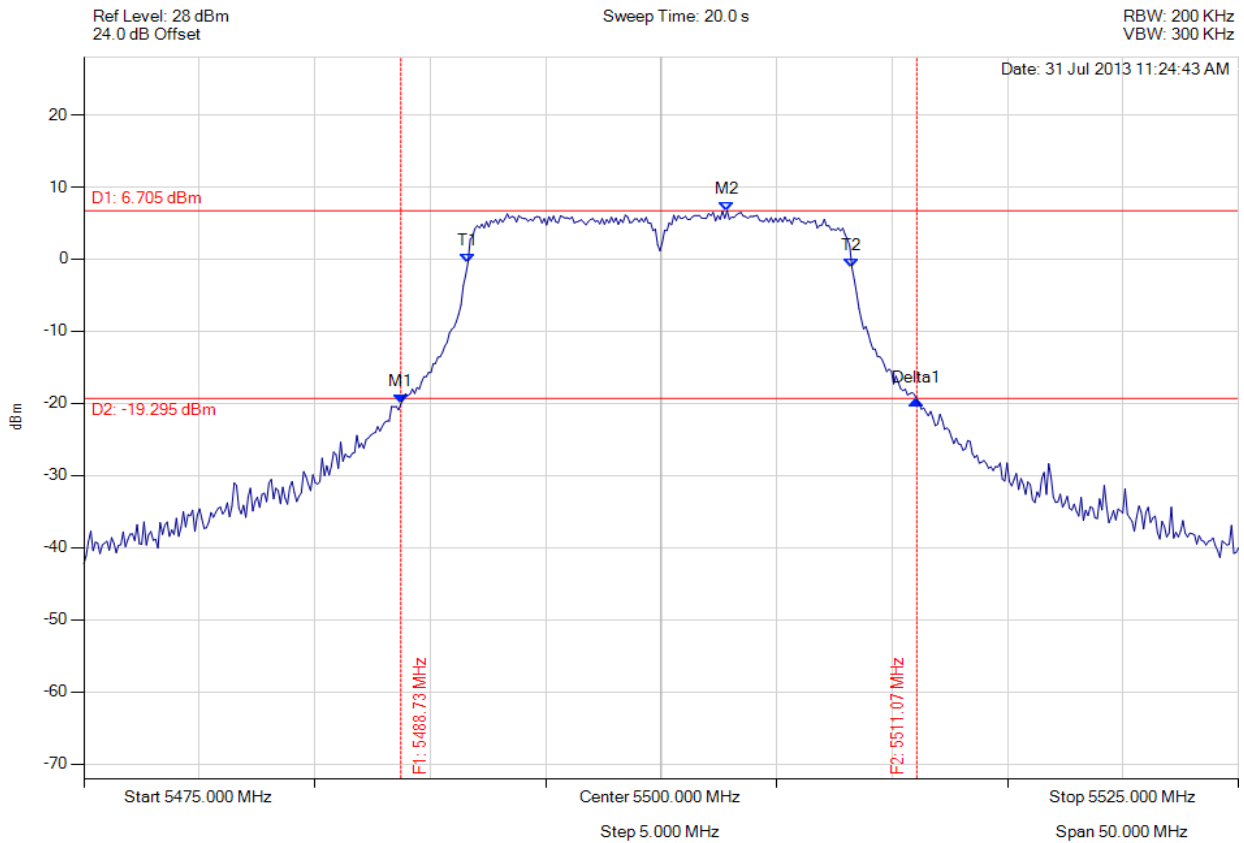

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5488.727 MHz : -20.086 dBm M2 : 5502.856 MHz : 6.705 dBm Delta1 : 22.345 MHz : 0.594 dB T1 : 5491.633 MHz : -0.483 dBm T2 : 5508.267 MHz : -1.223 dBm OBW : 16.633 MHz	Measured 26 dB Bandwidth: 22.345 MHz Measured 99% Bandwidth: 16.633 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5580.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

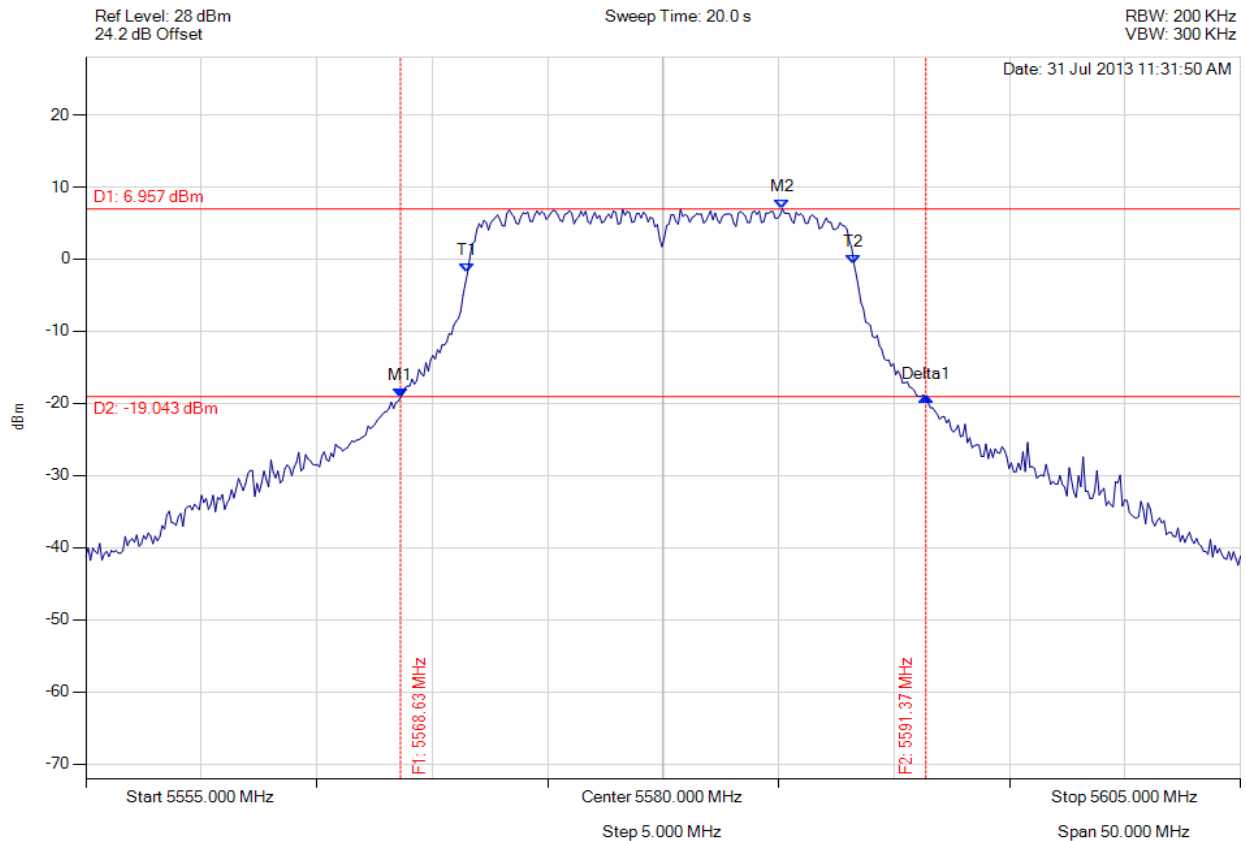

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5568.627 MHz : -19.181 dBm M2 : 5585.160 MHz : 6.957 dBm Delta1 : 22.745 MHz : 0.122 dB T1 : 5571.533 MHz : -1.861 dBm T2 : 5588.267 MHz : -0.680 dBm OBW : 16.733 MHz	Measured 26 dB Bandwidth: 22.745 MHz Measured 99% Bandwidth: 16.733 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5580.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

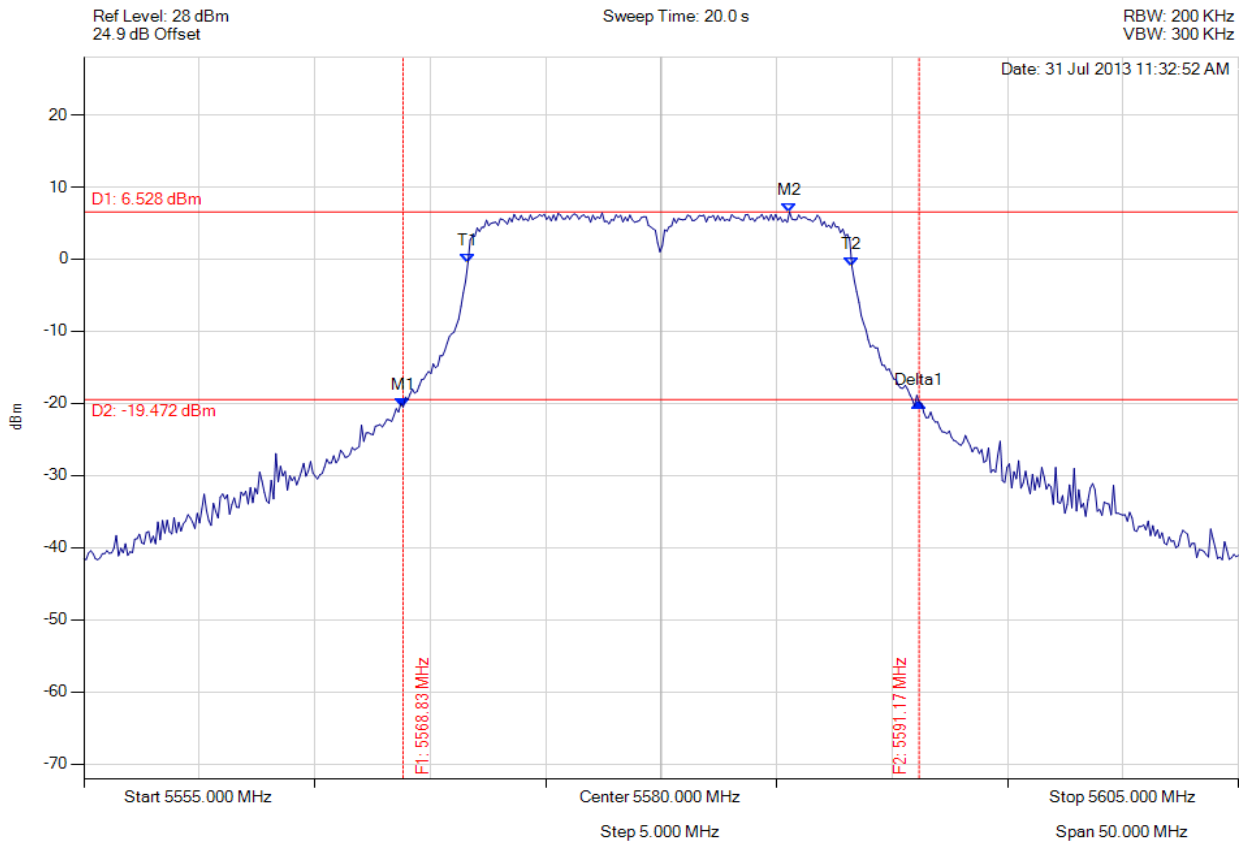

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5568.828 MHz : -20.513 dBm M2 : 5585.561 MHz : 6.528 dBm Delta1 : 22.345 MHz : 0.606 dB T1 : 5571.633 MHz : -0.491 dBm T2 : 5588.267 MHz : -1.070 dBm OBW : 16.633 MHz	Measured 26 dB Bandwidth: 22.345 MHz Measured 99% Bandwidth: 16.633 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5580.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

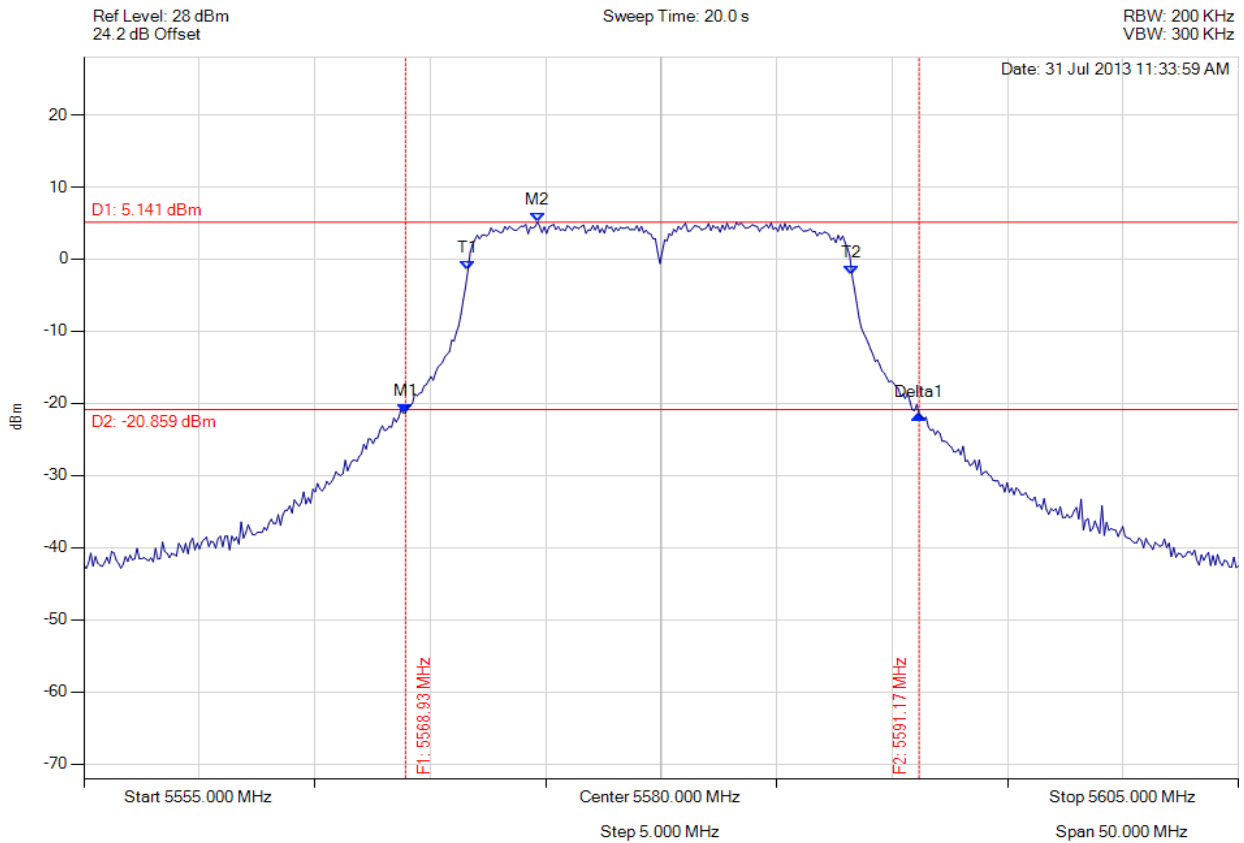

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5568.928 MHz : -21.341 dBm M2 : 5574.639 MHz : 5.141 dBm Delta1 : 22.244 MHz : -0.212 dB T1 : 5571.633 MHz : -1.565 dBm T2 : 5588.267 MHz : -2.175 dBm OBW : 16.633 MHz	Measured 26 dB Bandwidth: 22.244 MHz Measured 99% Bandwidth: 16.633 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5700.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

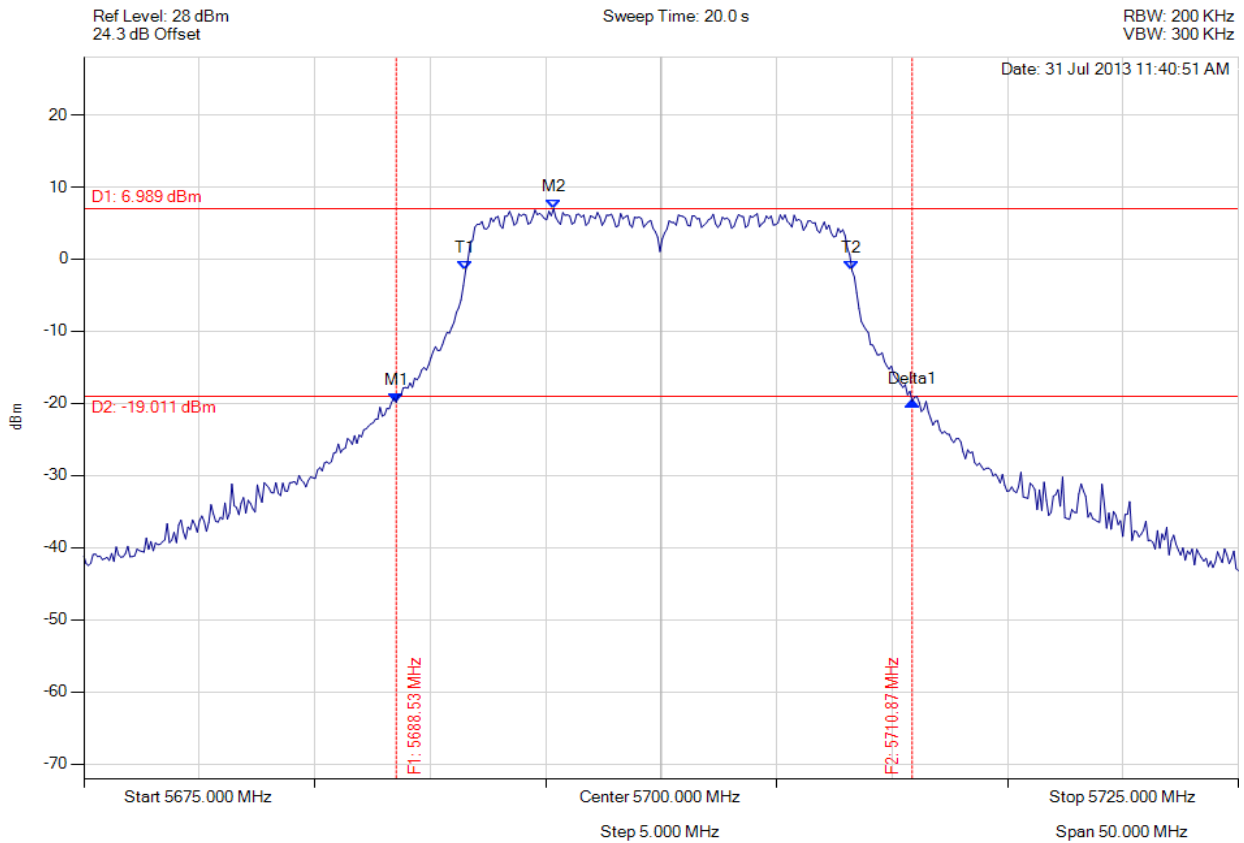

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5688.527 MHz : -19.858 dBm M2 : 5695.341 MHz : 6.989 dBm Delta1 : 22.345 MHz : 0.153 dB T1 : 5691.533 MHz : -1.589 dBm T2 : 5708.267 MHz : -1.595 dBm OBW : 16.733 MHz	Measured 26 dB Bandwidth: 22.345 MHz Measured 99% Bandwidth: 16.733 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5700.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

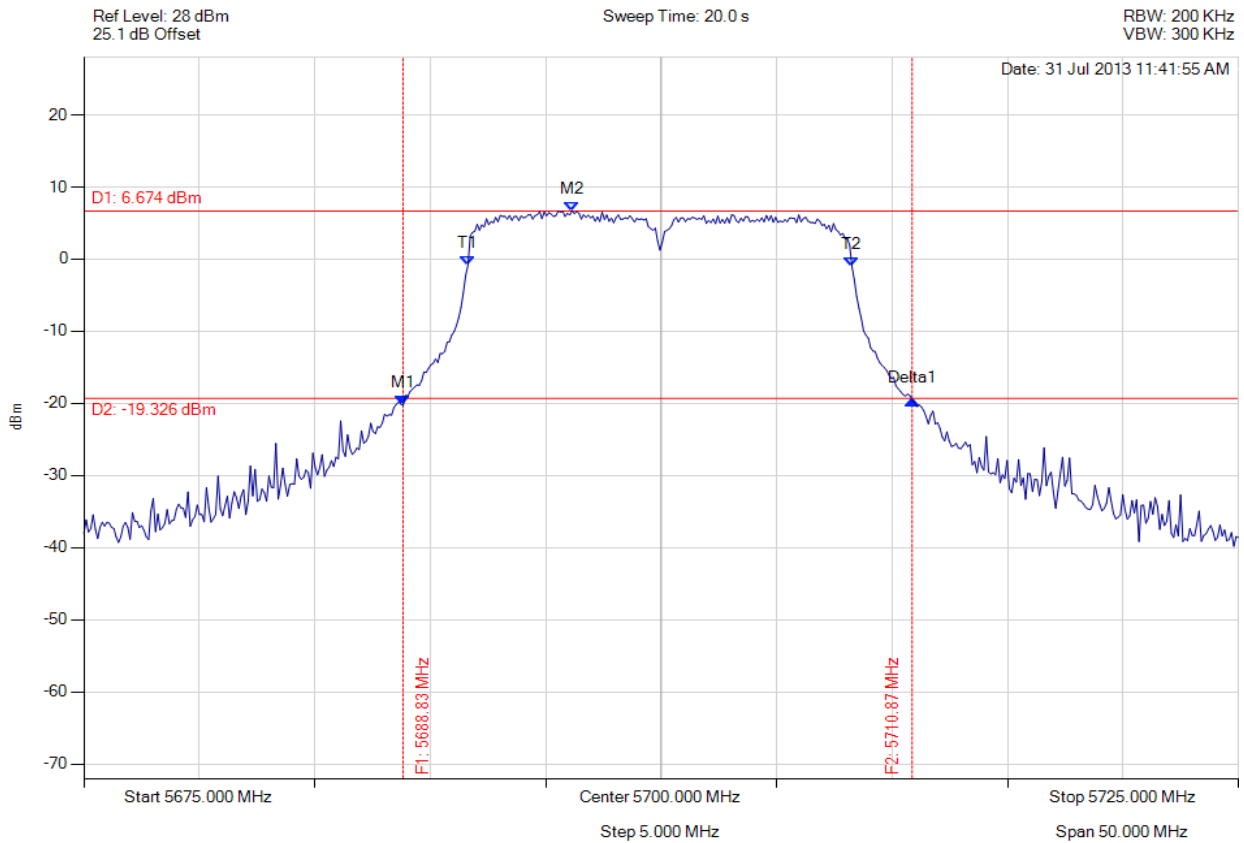

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5688.828 MHz : -20.267 dBm M2 : 5696.142 MHz : 6.674 dBm Delta1 : 22.044 MHz : 0.744 dB T1 : 5691.633 MHz : -0.832 dBm T2 : 5708.267 MHz : -1.078 dBm OBW : 16.633 MHz	Measured 26 dB Bandwidth: 22.044 MHz Measured 99% Bandwidth: 16.633 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5700.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

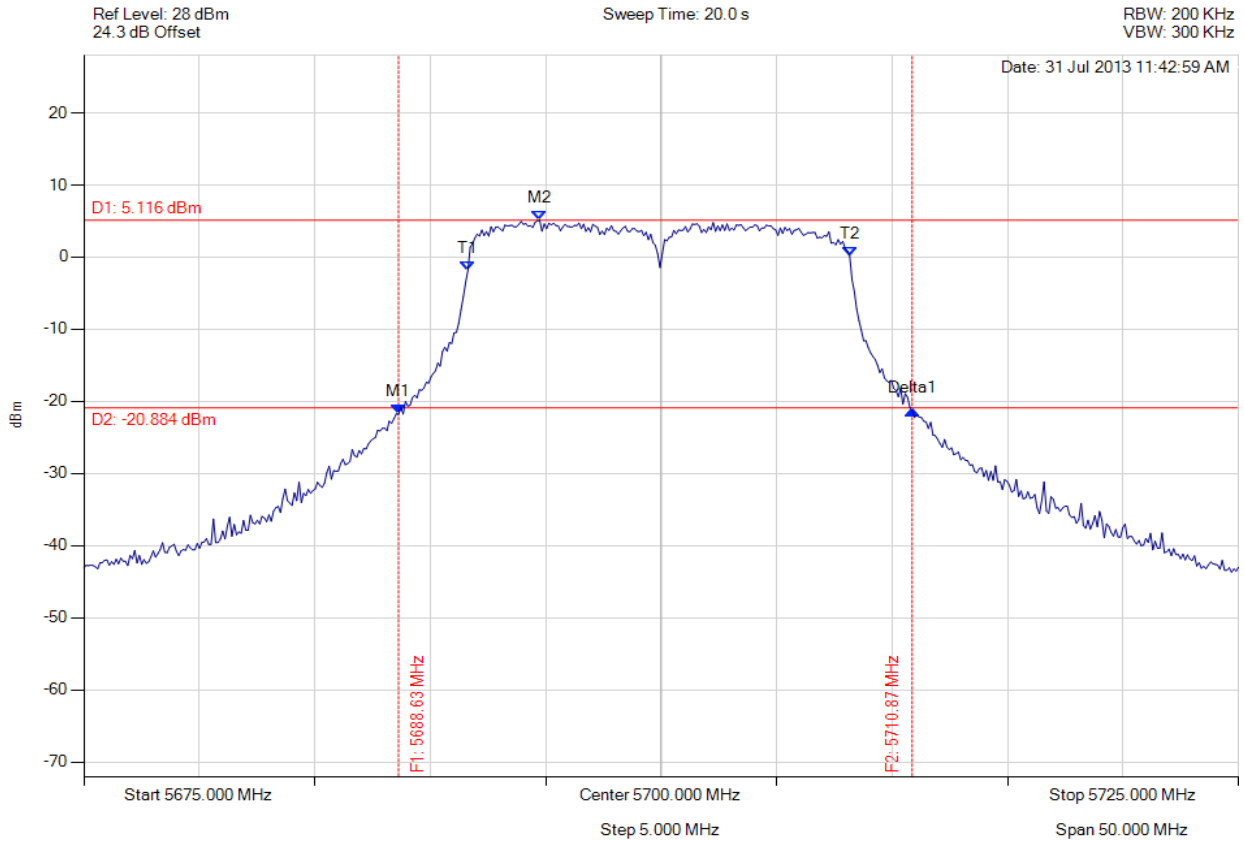

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5688.627 MHz : -21.776 dBm M2 : 5694.739 MHz : 5.116 dBm Delta1 : 22.244 MHz : 0.543 dB T1 : 5691.633 MHz : -1.809 dBm T2 : 5708.166 MHz : 0.168 dBm OBW : 16.533 MHz	Measured 26 dB Bandwidth: 22.244 MHz Measured 99% Bandwidth: 16.533 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 103 of 196



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

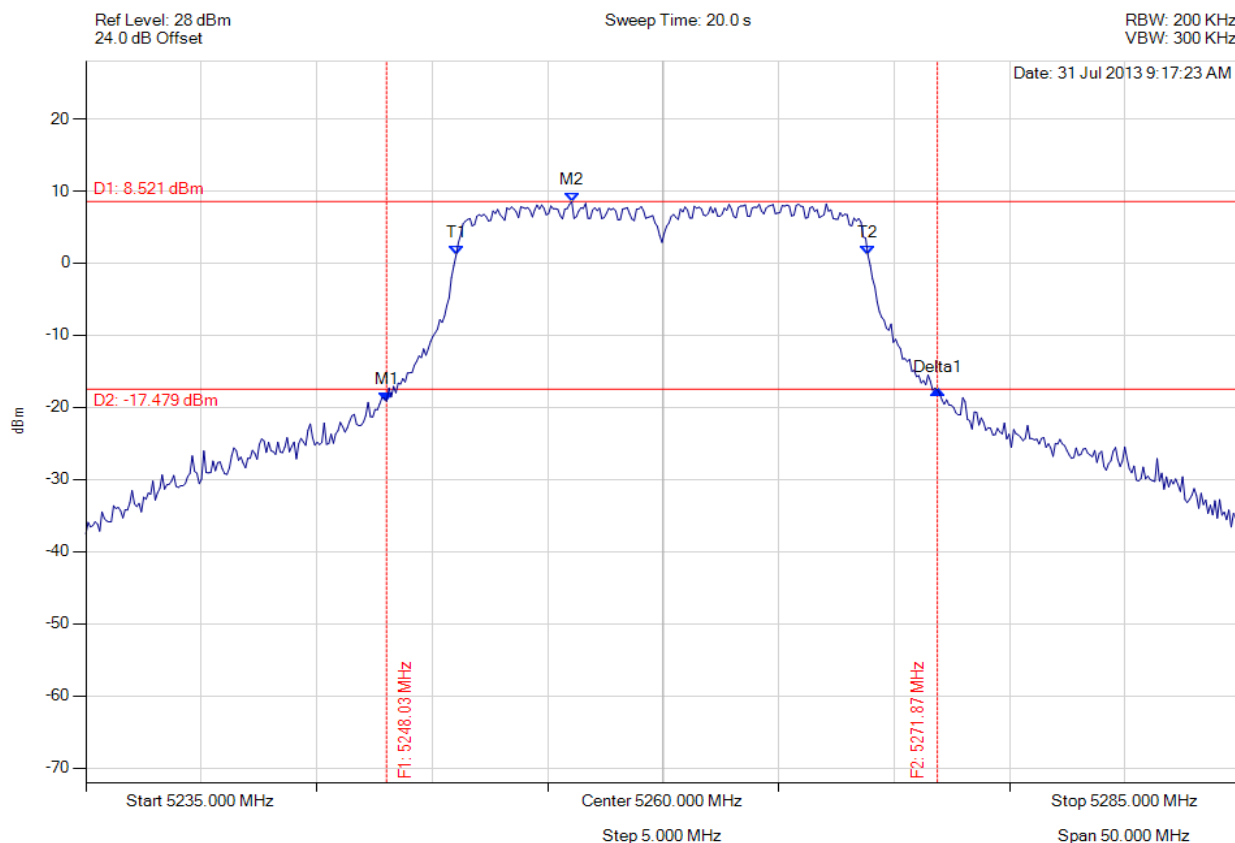

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5248.026 MHz : -19.161 dBm M2 : 5256.042 MHz : 8.521 dBm Delta1 : 23.848 MHz : 1.619 dB T1 : 5251.032 MHz : 1.071 dBm T2 : 5268.868 MHz : 1.108 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 23.848 MHz Measured 99% Bandwidth: 17.836 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

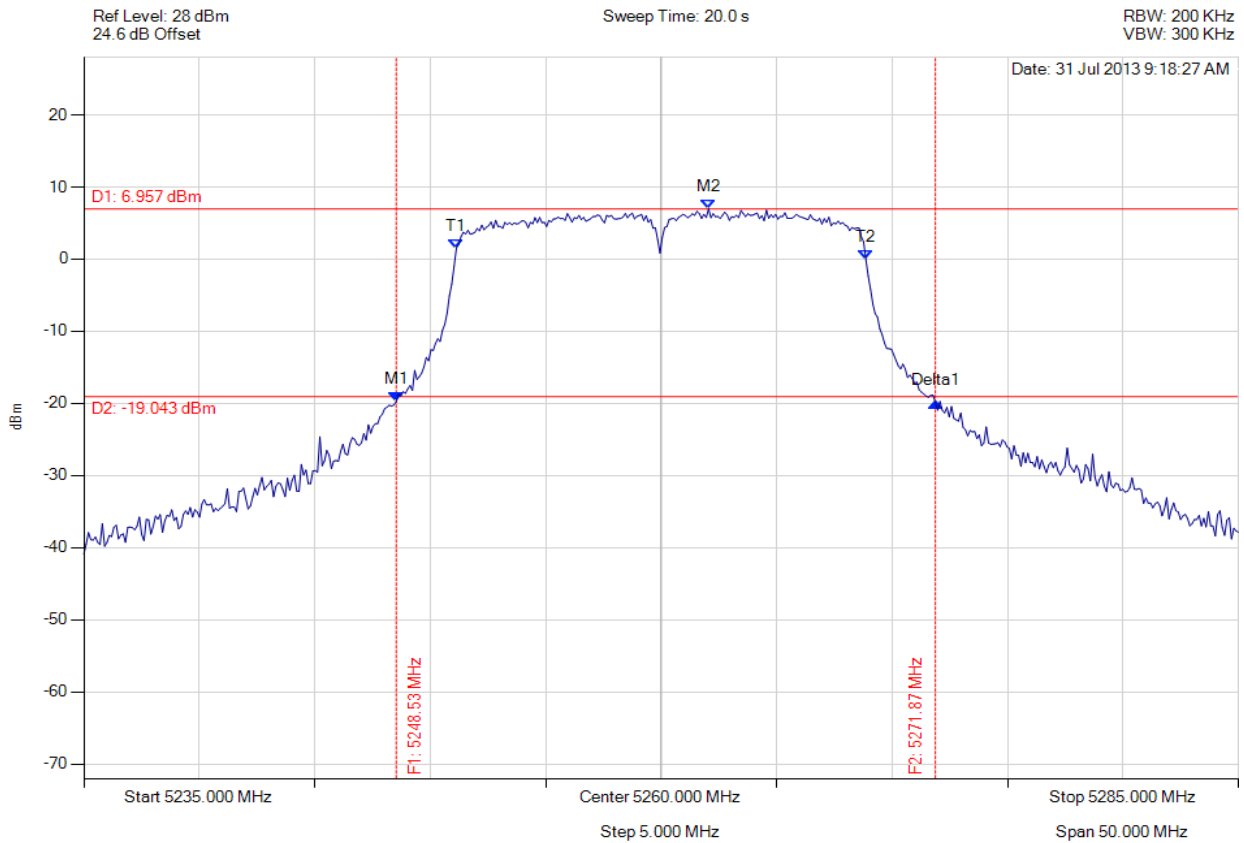

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5248.527 MHz : -19.763 dBm M2 : 5262.054 MHz : 6.957 dBm Delta1 : 23.347 MHz : -0.094 dB T1 : 5251.132 MHz : 1.527 dBm T2 : 5268.868 MHz : -0.086 dBm OBW : 17.735 MHz	Measured 26 dB Bandwidth: 23.347 MHz Measured 99% Bandwidth: 17.735 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

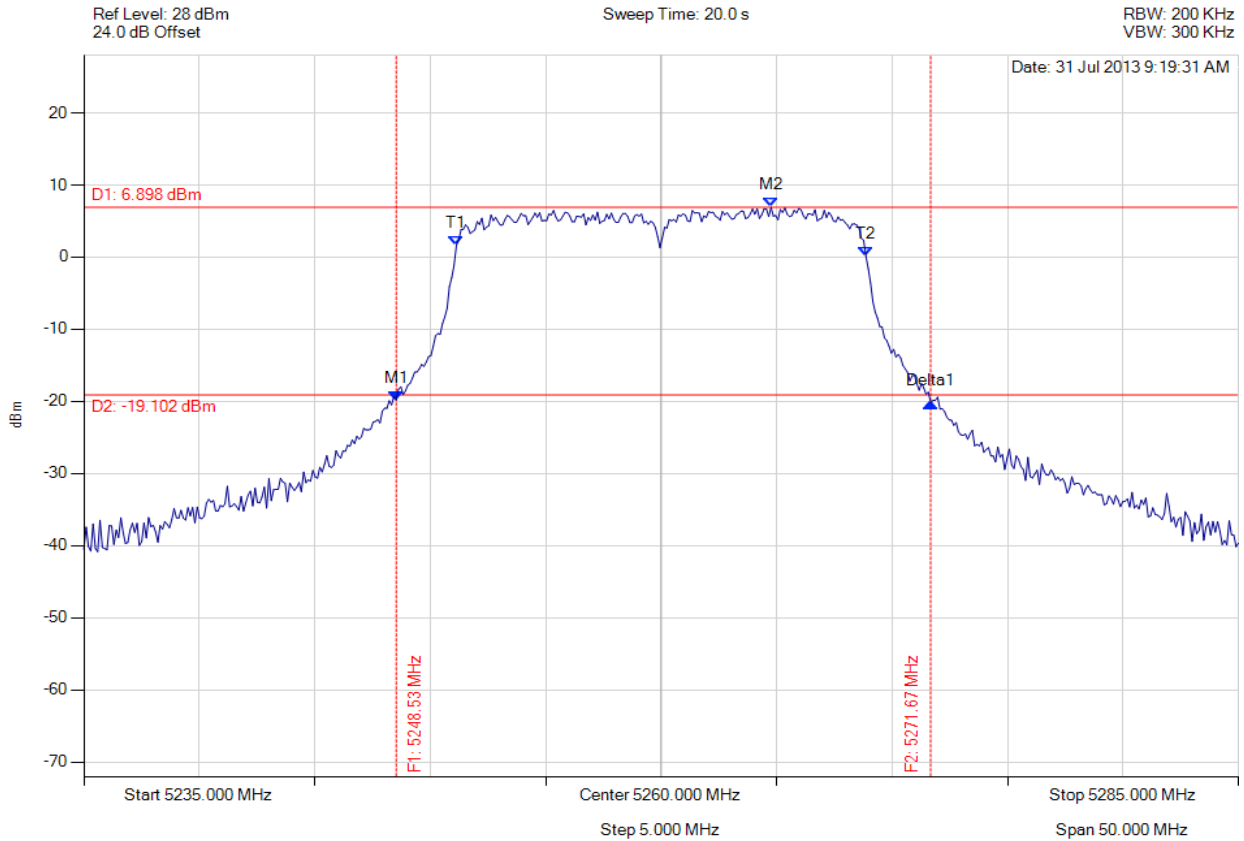

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5248.527 MHz : -19.822 dBm M2 : 5264.760 MHz : 6.898 dBm Delta1 : 23.146 MHz : -0.376 dB T1 : 5251.132 MHz : 1.624 dBm T2 : 5268.868 MHz : 0.138 dBm OBW : 17.735 MHz	Measured 26 dB Bandwidth: 23.146 MHz Measured 99% Bandwidth: 17.735 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

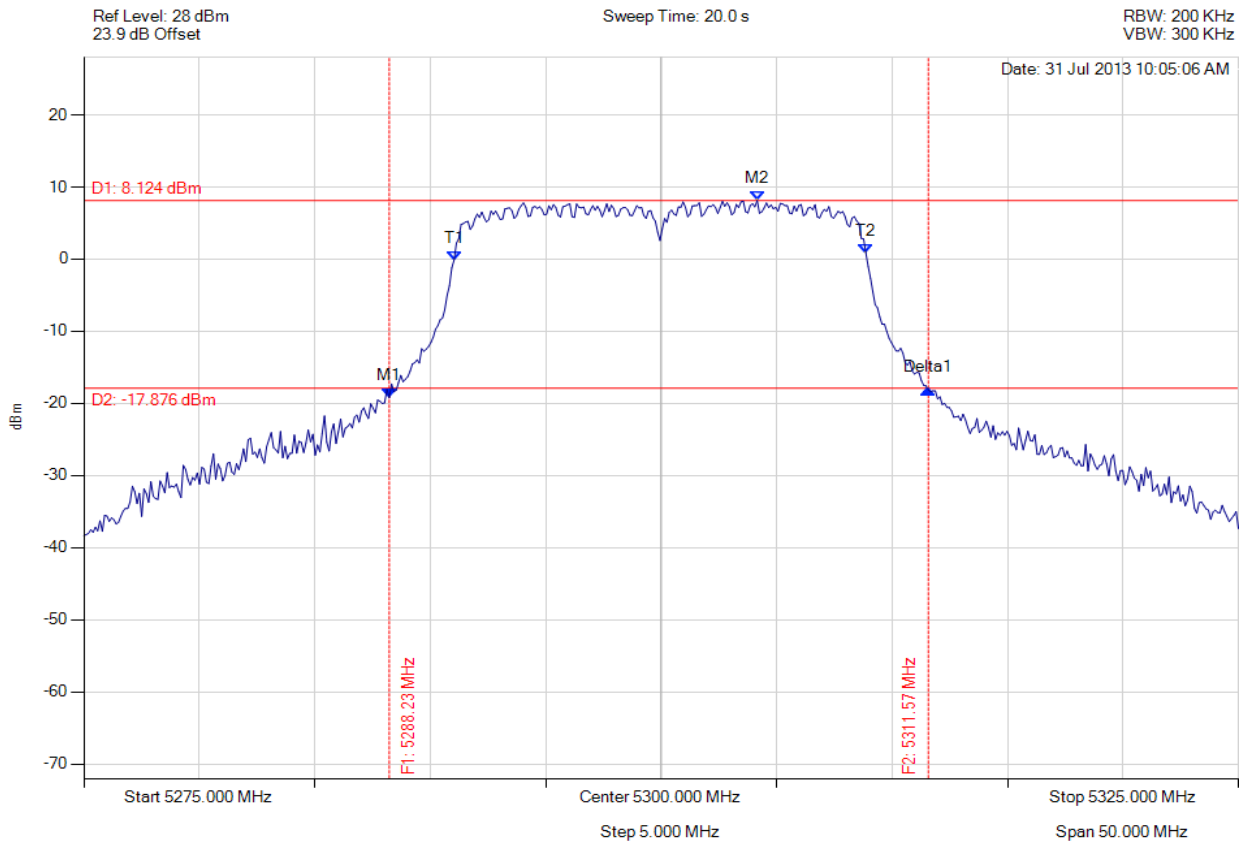

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5288.226 MHz : -19.228 dBm M2 : 5304.158 MHz : 8.124 dBm Delta1 : 23.347 MHz : 1.106 dB T1 : 5291.032 MHz : -0.137 dBm T2 : 5308.868 MHz : 0.807 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 23.347 MHz Measured 99% Bandwidth: 17.836 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

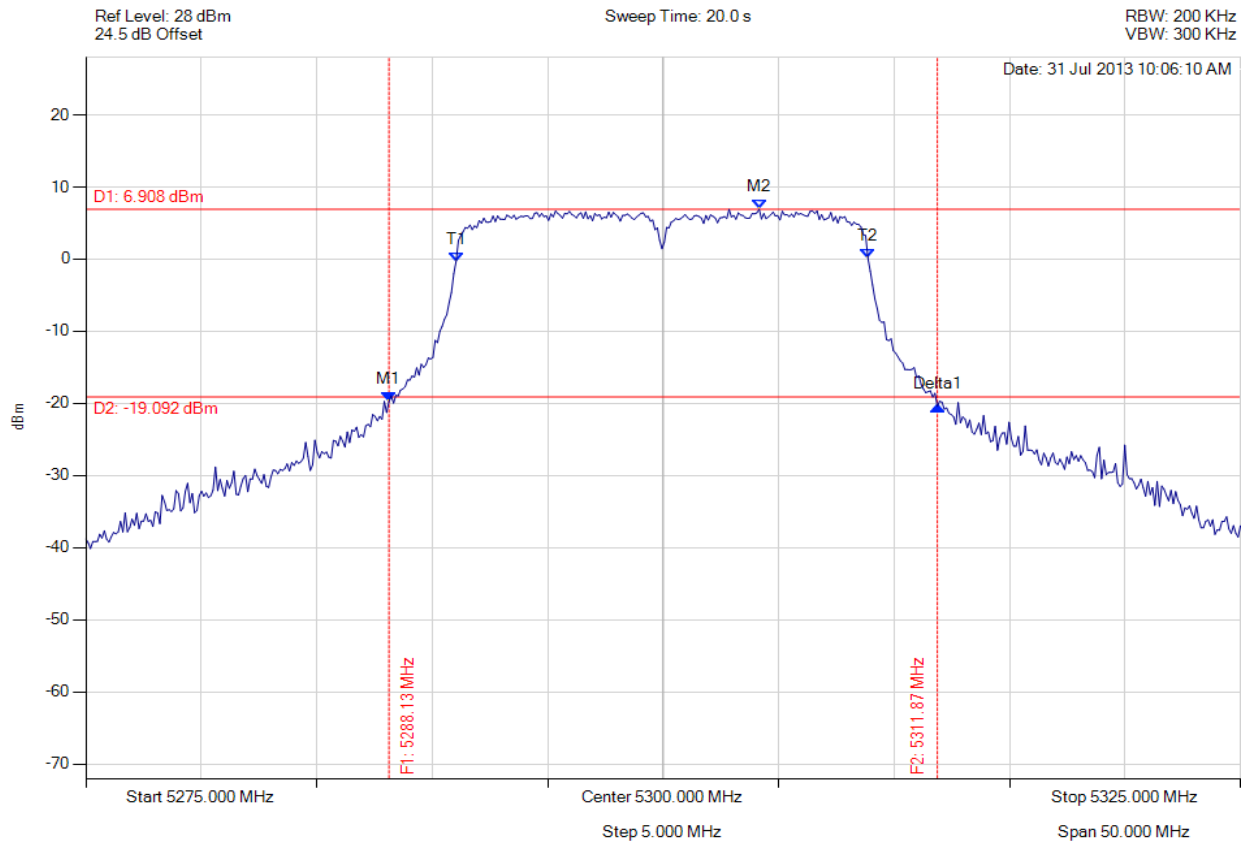

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5288.126 MHz : -19.732 dBm M2 : 5304.158 MHz : 6.908 dBm Delta1 : 23.747 MHz : -0.657 dB T1 : 5291.032 MHz : -0.324 dBm T2 : 5308.868 MHz : 0.160 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 23.747 MHz Measured 99% Bandwidth: 17.836 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 108 of 196



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

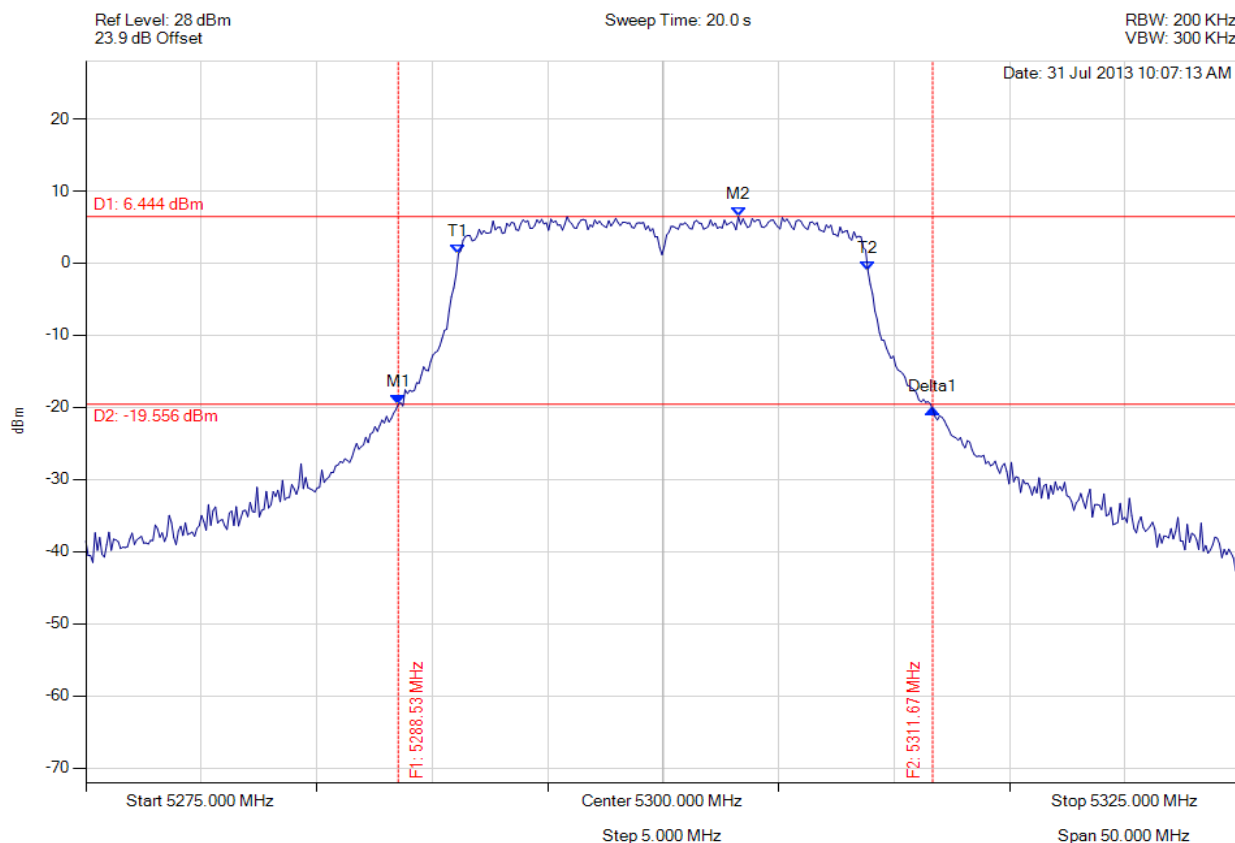

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5288.527 MHz : -19.561 dBm M2 : 5303.257 MHz : 6.444 dBm Delta1 : 23.146 MHz : -0.689 dB T1 : 5291.132 MHz : 1.287 dBm T2 : 5308.868 MHz : -1.042 dBm OBW : 17.735 MHz	Measured 26 dB Bandwidth: 23.146 MHz Measured 99% Bandwidth: 17.735 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

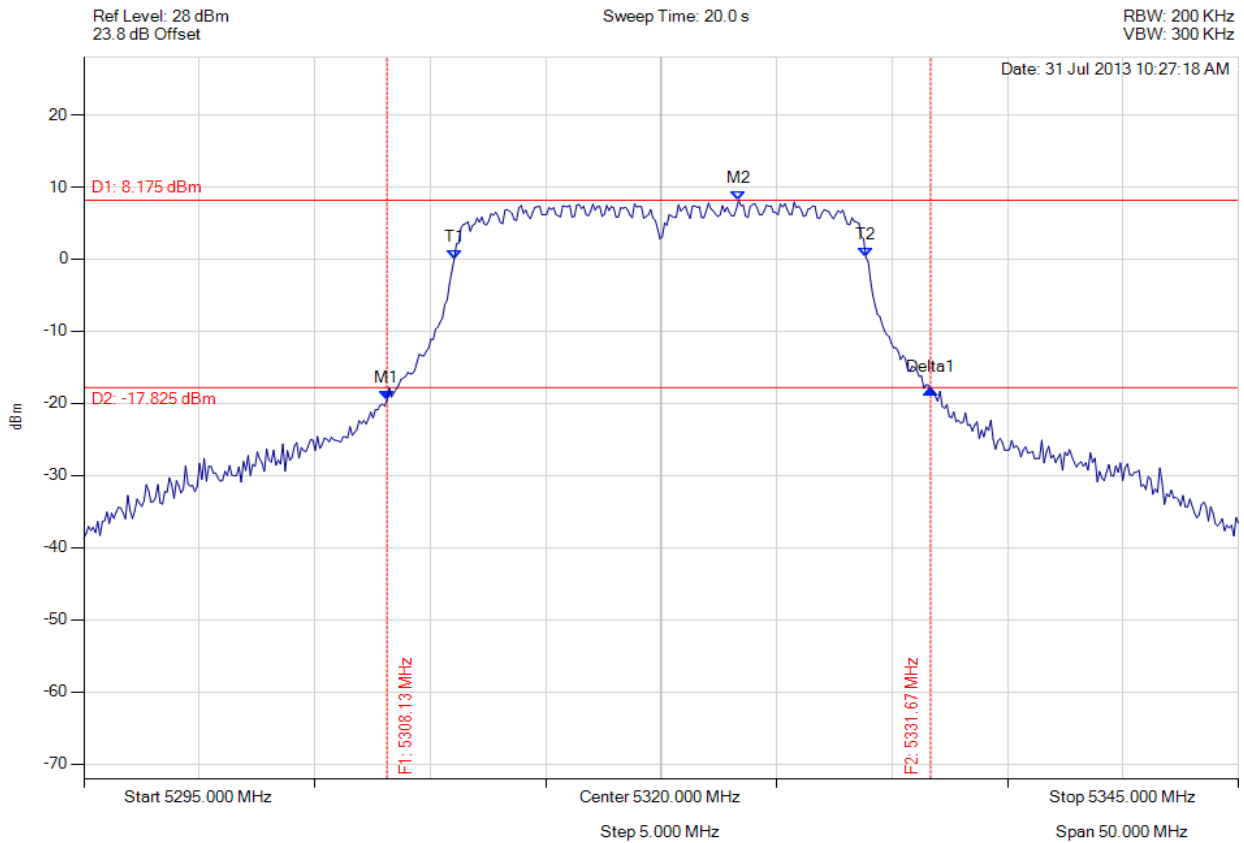

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5308.126 MHz : -19.527 dBm M2 : 5323.357 MHz : 8.175 dBm Delta1 : 23.547 MHz : 1.509 dB T1 : 5311.032 MHz : -0.108 dBm T2 : 5328.868 MHz : 0.245 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 23.547 MHz Measured 99% Bandwidth: 17.836 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

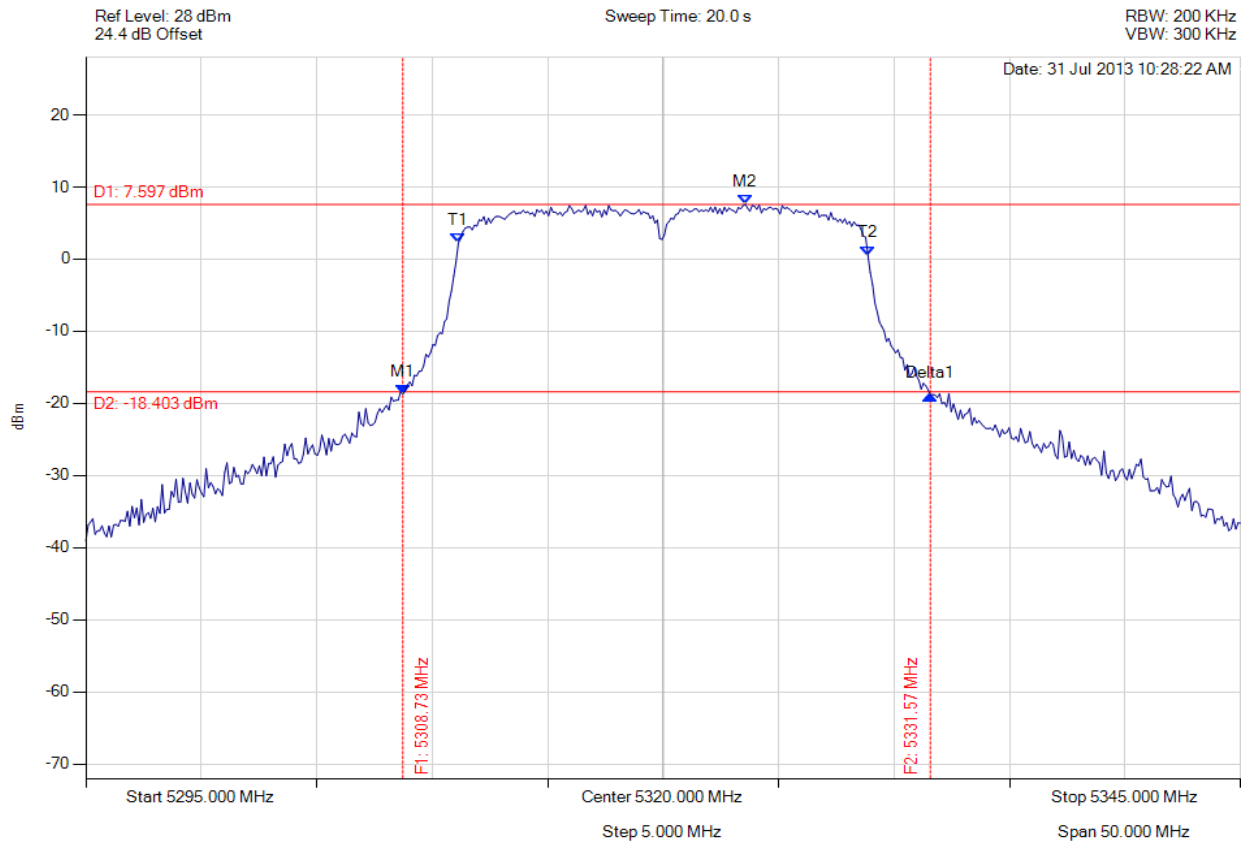

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5308.727 MHz : -18.697 dBm M2 : 5323.557 MHz : 7.597 dBm Delta1 : 22.846 MHz : -0.193 dB T1 : 5311.132 MHz : 2.257 dBm T2 : 5328.868 MHz : 0.544 dBm OBW : 17.735 MHz	Measured 26 dB Bandwidth: 22.846 MHz Measured 99% Bandwidth: 17.735 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 111 of 196



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

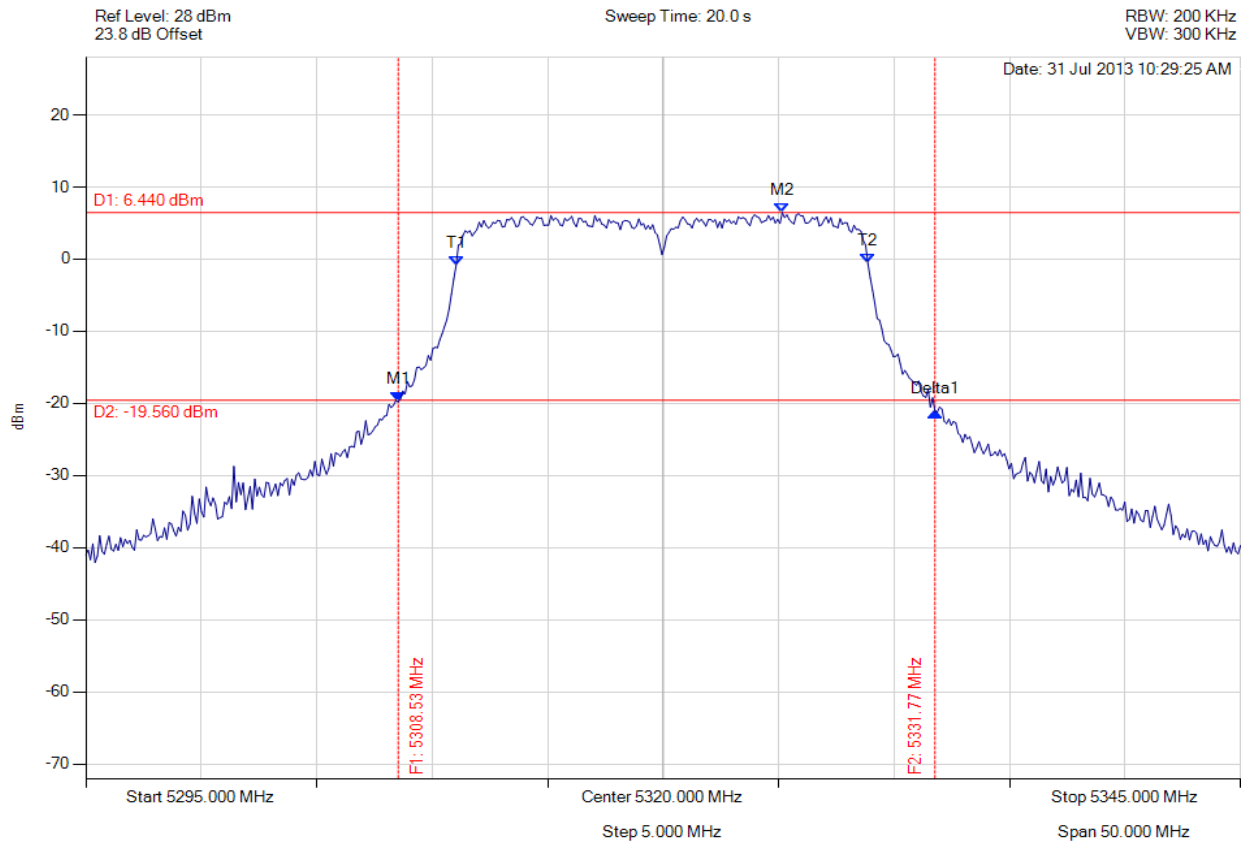

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5308.527 MHz : -19.783 dBm M2 : 5325.160 MHz : 6.440 dBm Delta1 : 23.246 MHz : -1.352 dB T1 : 5311.032 MHz : -0.934 dBm T2 : 5328.868 MHz : -0.592 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 23.246 MHz Measured 99% Bandwidth: 17.836 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

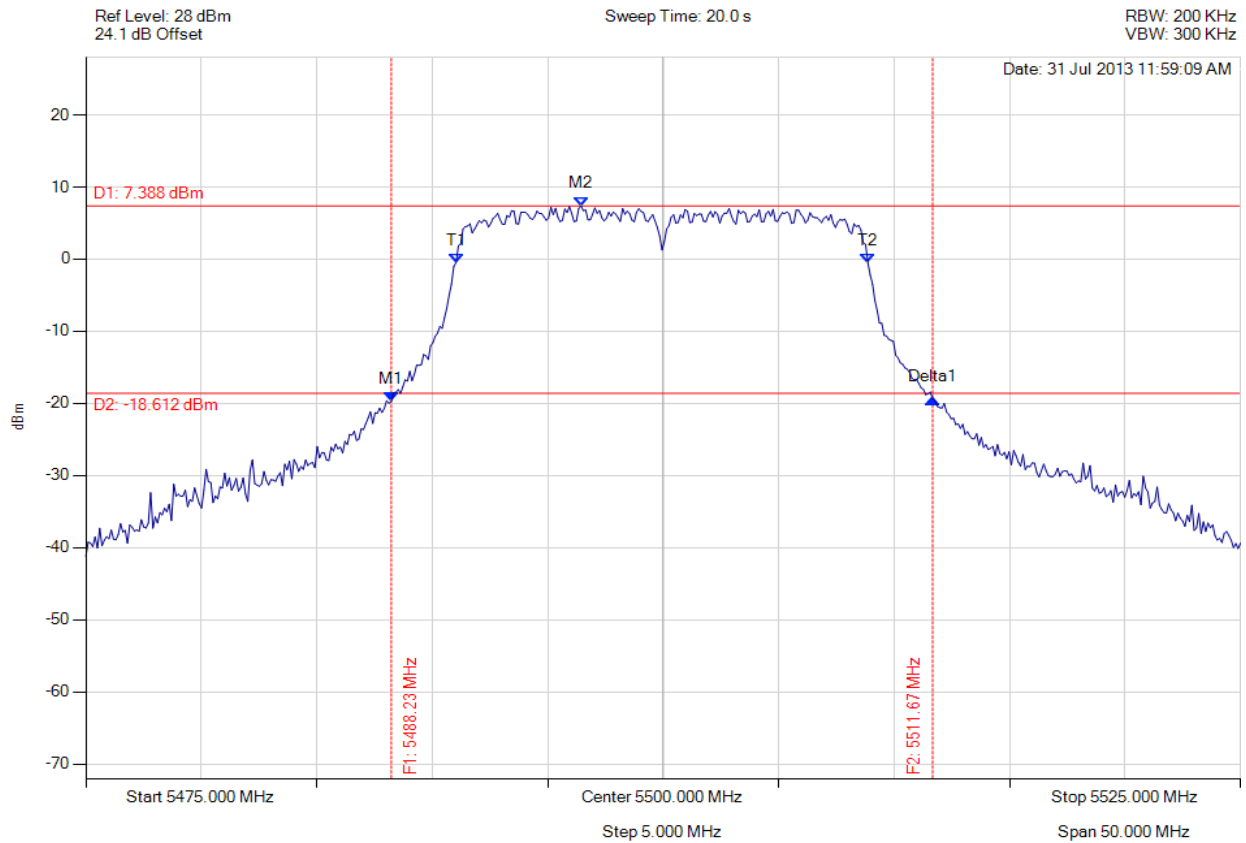

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5488.226 MHz : -19.736 dBm M2 : 5496.443 MHz : 7.388 dBm Delta1 : 23.447 MHz : 0.362 dB T1 : 5491.032 MHz : -0.483 dBm T2 : 5508.868 MHz : -0.546 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 23.447 MHz Measured 99% Bandwidth: 17.836 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

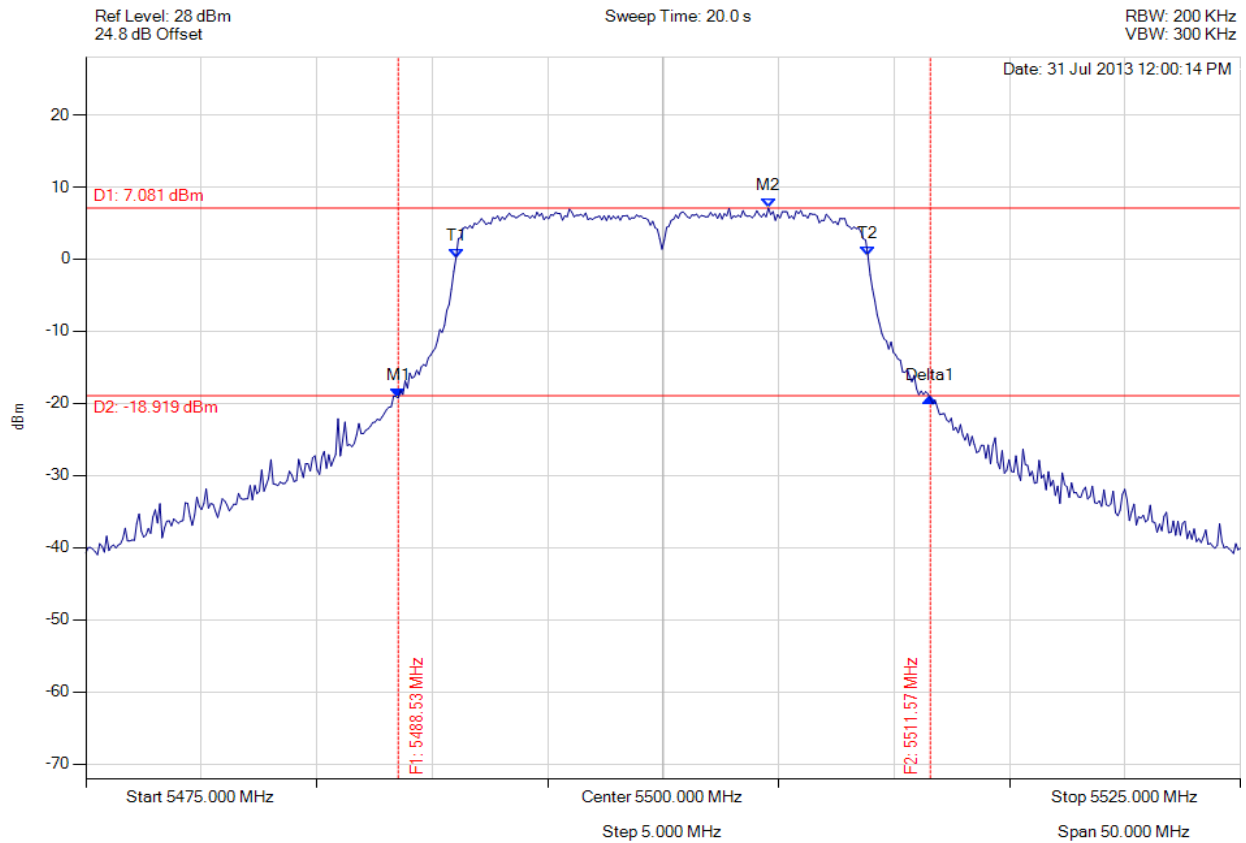

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5488.527 MHz : -19.252 dBm M2 : 5504.559 MHz : 7.081 dBm Delta1 : 23.046 MHz : -0.010 dB T1 : 5491.032 MHz : 0.180 dBm T2 : 5508.868 MHz : 0.483 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 23.046 MHz Measured 99% Bandwidth: 17.836 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

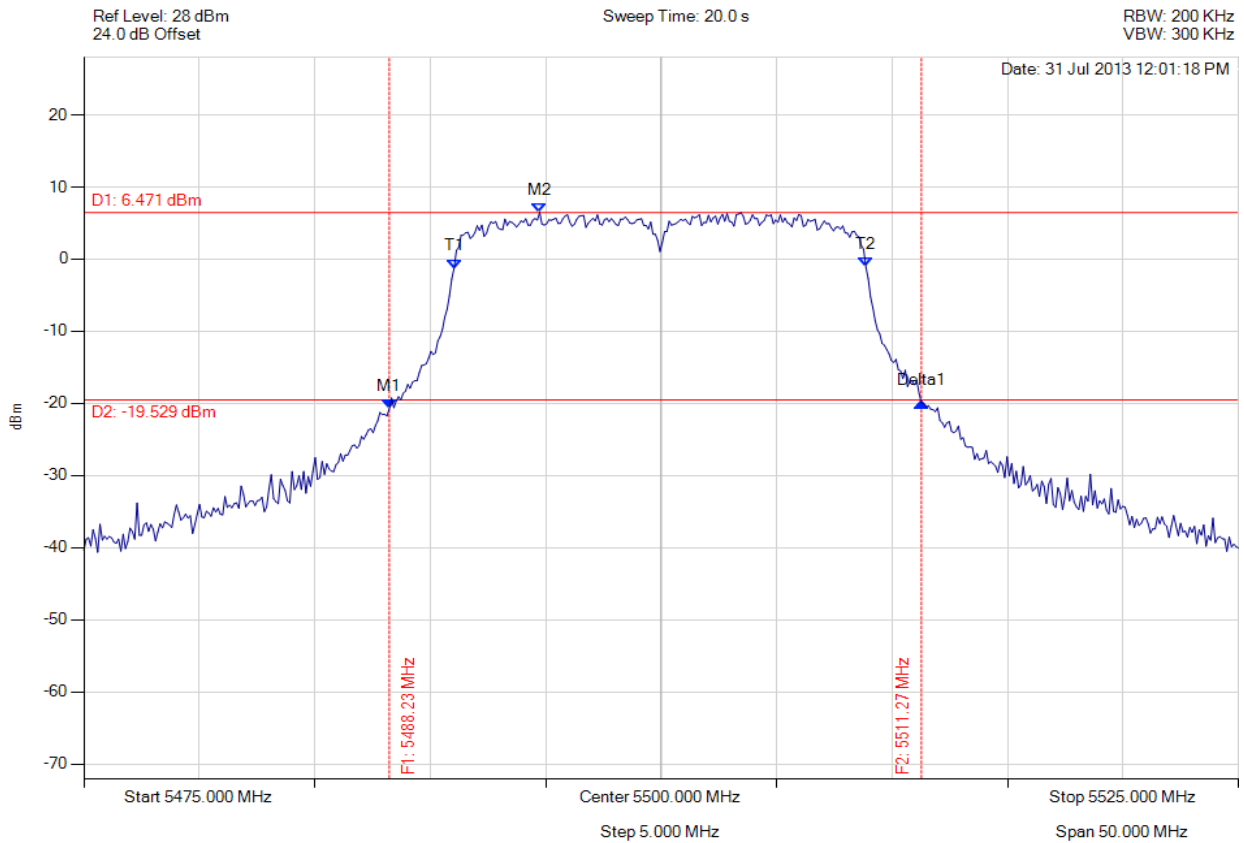

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5488.226 MHz : -20.761 dBm M2 : 5494.739 MHz : 6.471 dBm Delta1 : 23.046 MHz : 0.803 dB T1 : 5491.032 MHz : -1.286 dBm T2 : 5508.868 MHz : -1.111 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 23.046 MHz Measured 99% Bandwidth: 17.836 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

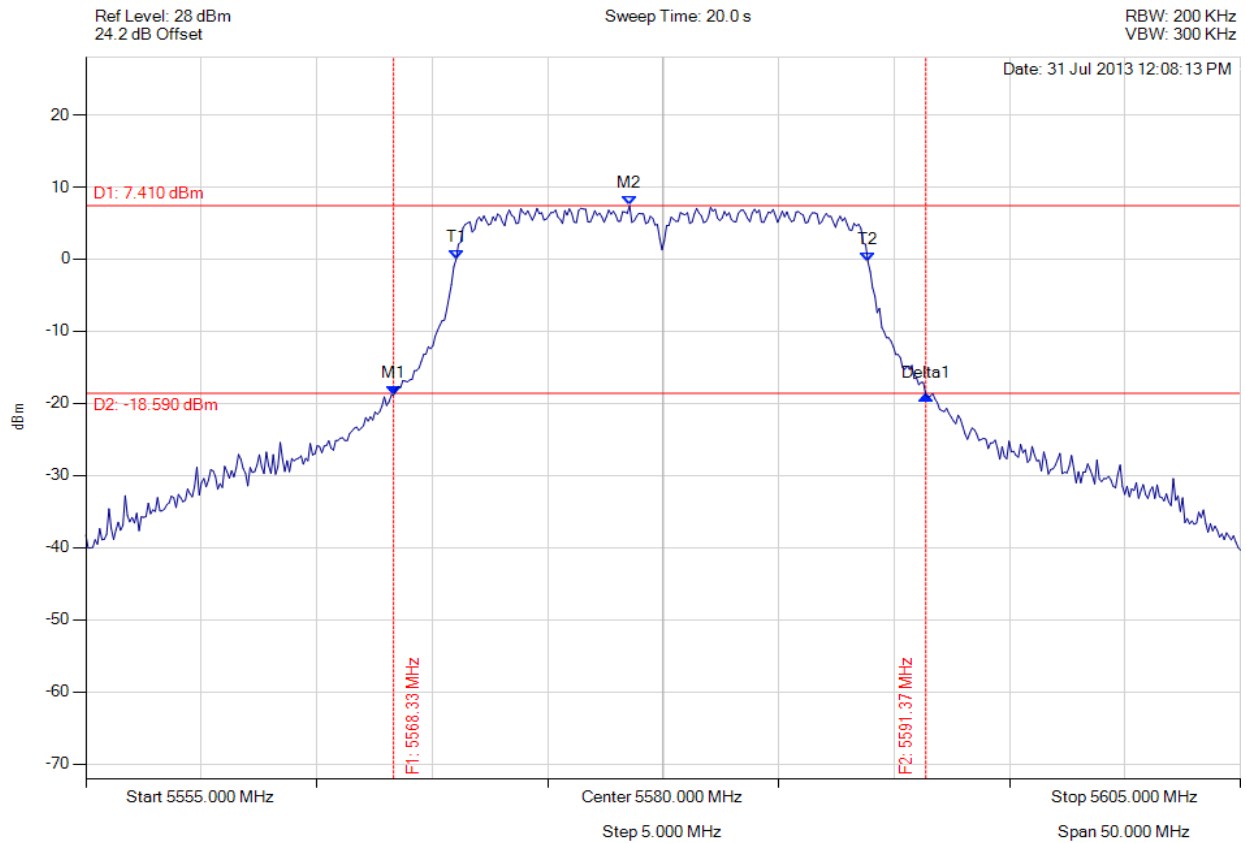

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5568.327 MHz : -18.831 dBm M2 : 5578.547 MHz : 7.410 dBm Delta1 : 23.046 MHz : -0.059 dB T1 : 5571.032 MHz : -0.072 dBm T2 : 5588.868 MHz : -0.365 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 23.046 MHz Measured 99% Bandwidth: 17.836 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

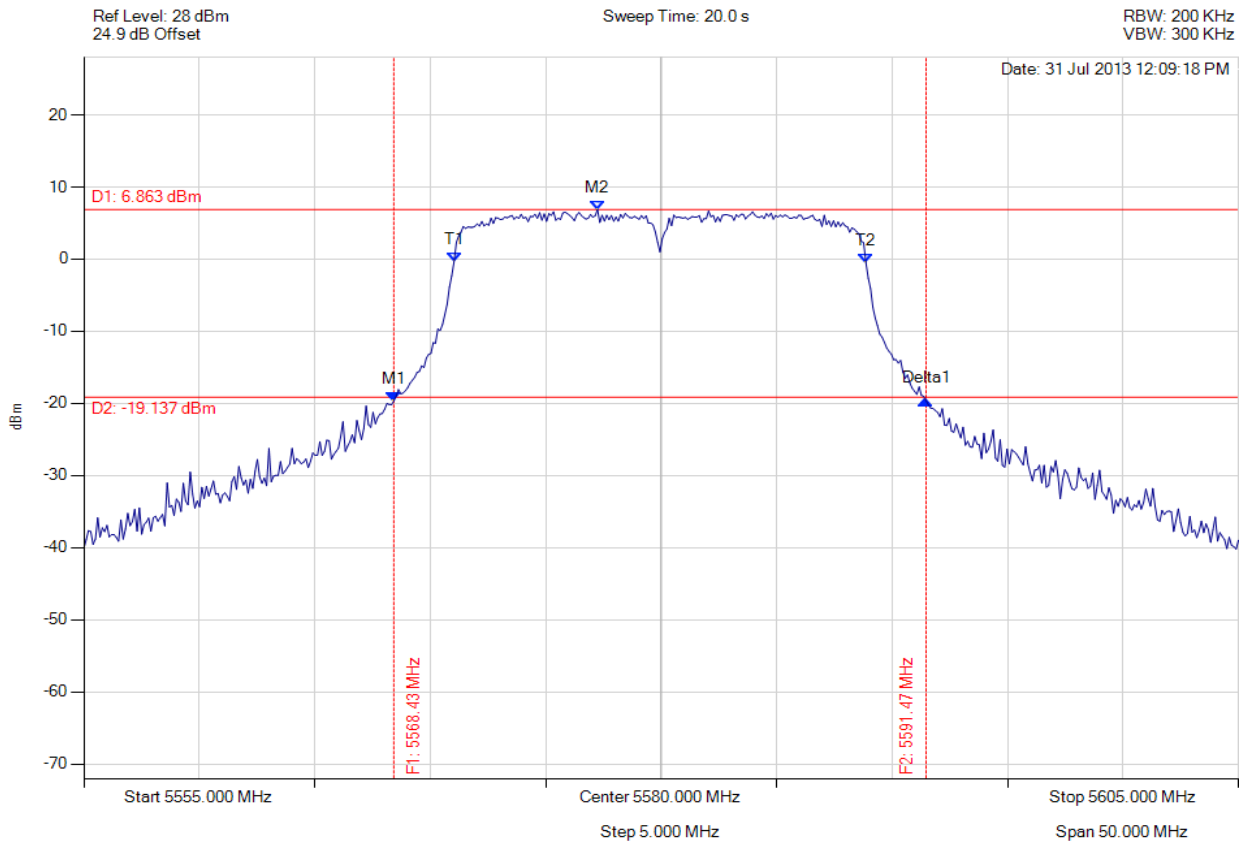

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5568.427 MHz : -19.649 dBm M2 : 5577.244 MHz : 6.863 dBm Delta1 : 23.046 MHz : 0.045 dB T1 : 5571.032 MHz : -0.348 dBm T2 : 5588.868 MHz : -0.472 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 23.046 MHz Measured 99% Bandwidth: 17.836 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

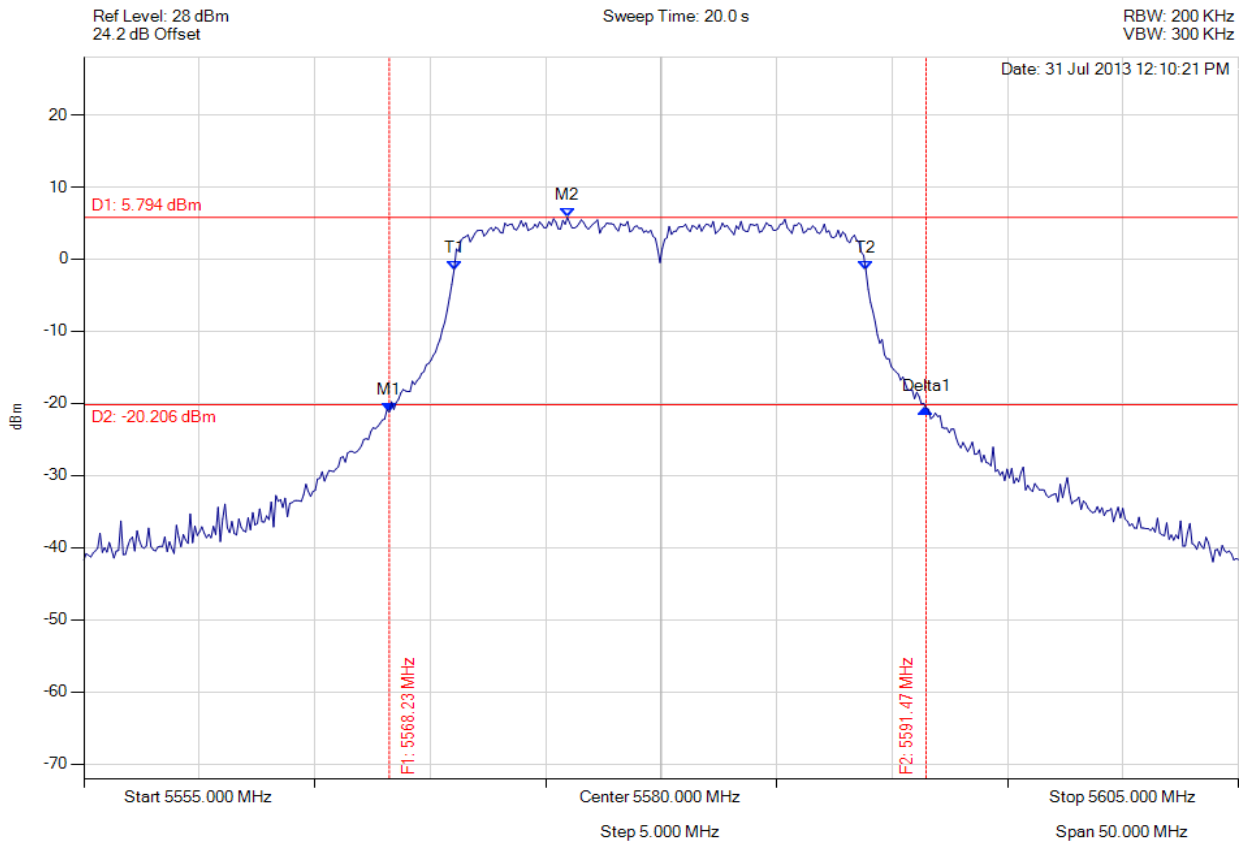

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5568.226 MHz : -21.233 dBm M2 : 5575.942 MHz : 5.794 dBm Delta1 : 23.246 MHz : 0.549 dB T1 : 5571.032 MHz : -1.524 dBm T2 : 5588.868 MHz : -1.587 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 23.246 MHz Measured 99% Bandwidth: 17.836 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 118 of 196



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5700.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

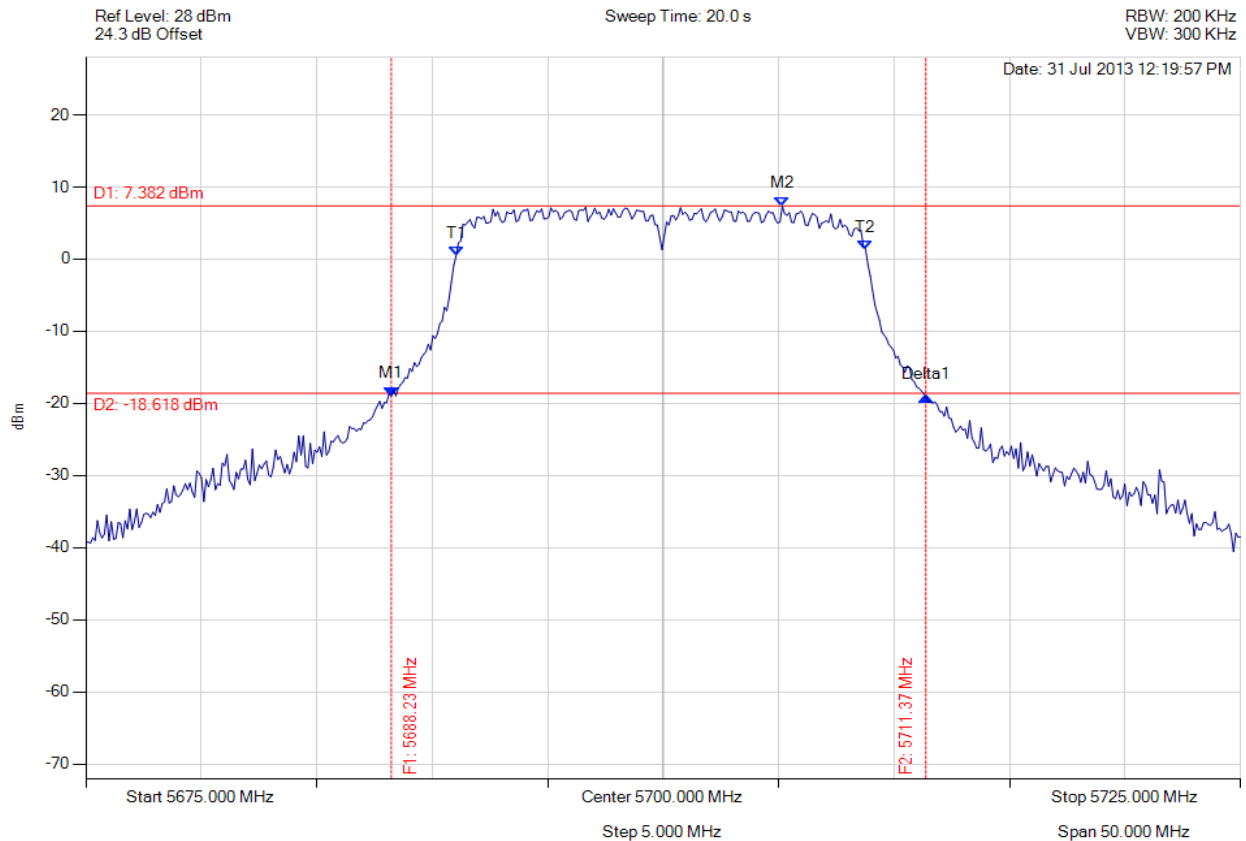

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5688.226 MHz : -18.967 dBm M2 : 5705.160 MHz : 7.382 dBm Delta1 : 23.146 MHz : -0.051 dB T1 : 5691.032 MHz : 0.398 dBm T2 : 5708.768 MHz : 1.346 dBm OBW : 17.735 MHz	Measured 26 dB Bandwidth: 23.146 MHz Measured 99% Bandwidth: 17.735 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5700.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

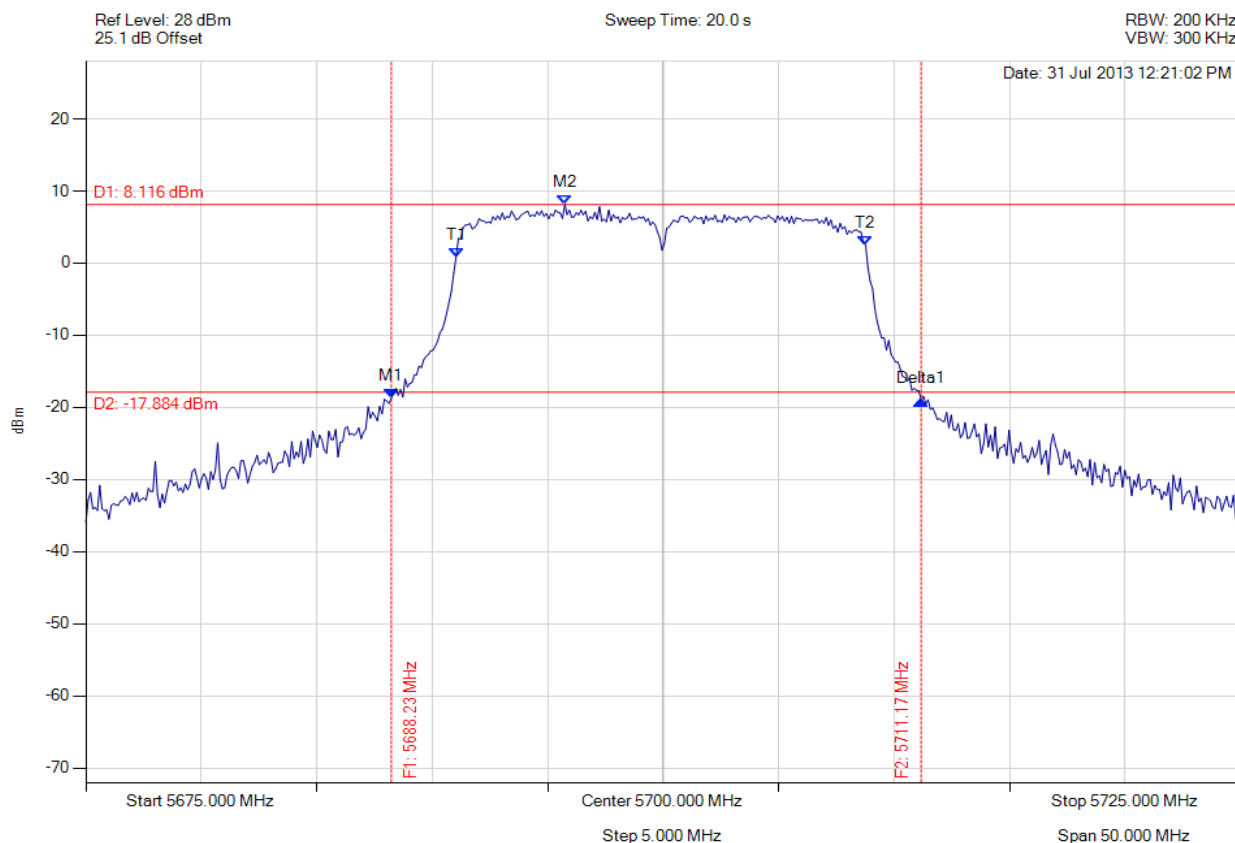

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5688.226 MHz : -18.752 dBm M2 : 5695.741 MHz : 8.116 dBm Delta1 : 22.946 MHz : -0.299 dB T1 : 5691.032 MHz : 0.831 dBm T2 : 5708.768 MHz : 2.513 dBm OBW : 17.735 MHz	Measured 26 dB Bandwidth: 22.946 MHz Measured 99% Bandwidth: 17.735 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 120 of 196



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5700.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

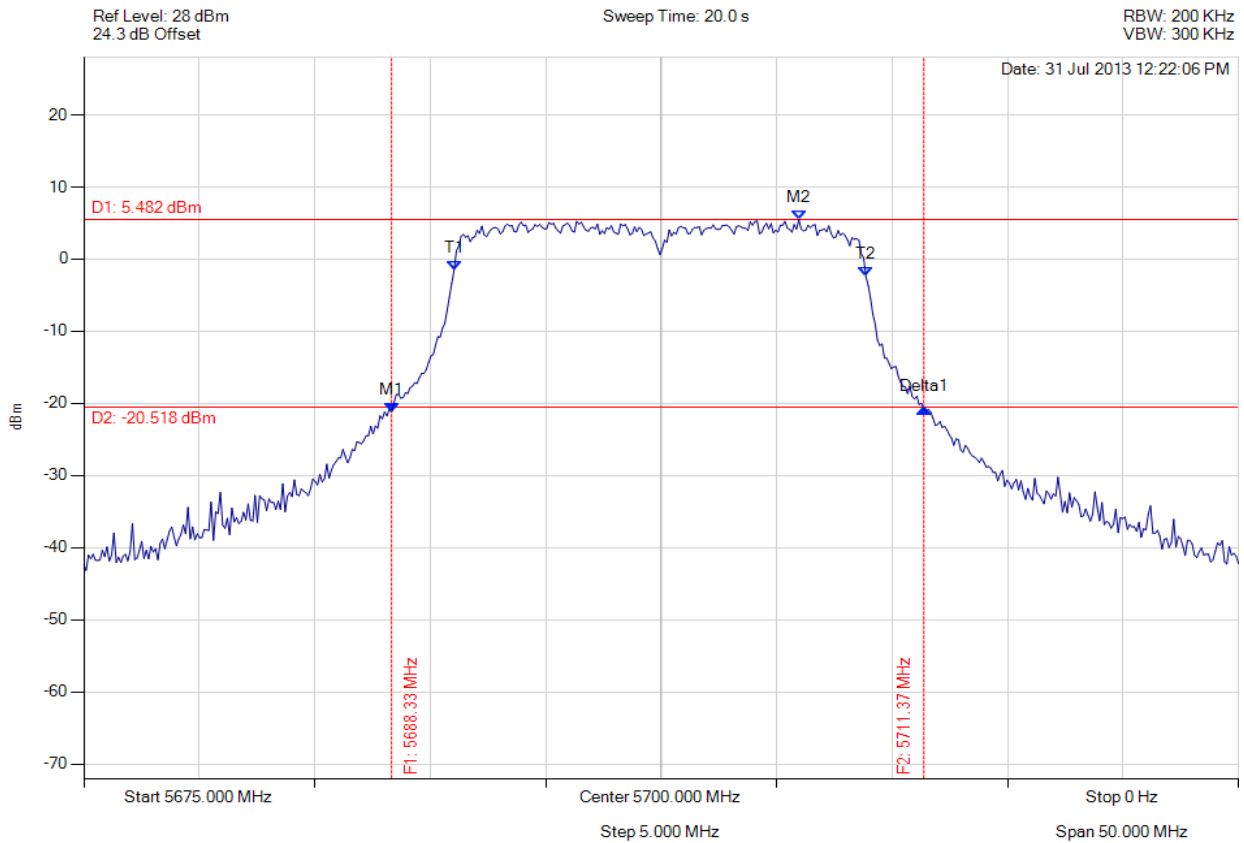

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5688.327 MHz : -21.192 dBm M2 : 5705.962 MHz : 5.482 dBm Delta1 : 23.046 MHz : 0.437 dB T1 : 5691.032 MHz : -1.571 dBm T2 : 5708.868 MHz : -2.423 dBm OBW : 17.836 MHz	Measured 26 dB Bandwidth: 23.046 MHz Measured 99% Bandwidth: 17.836 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

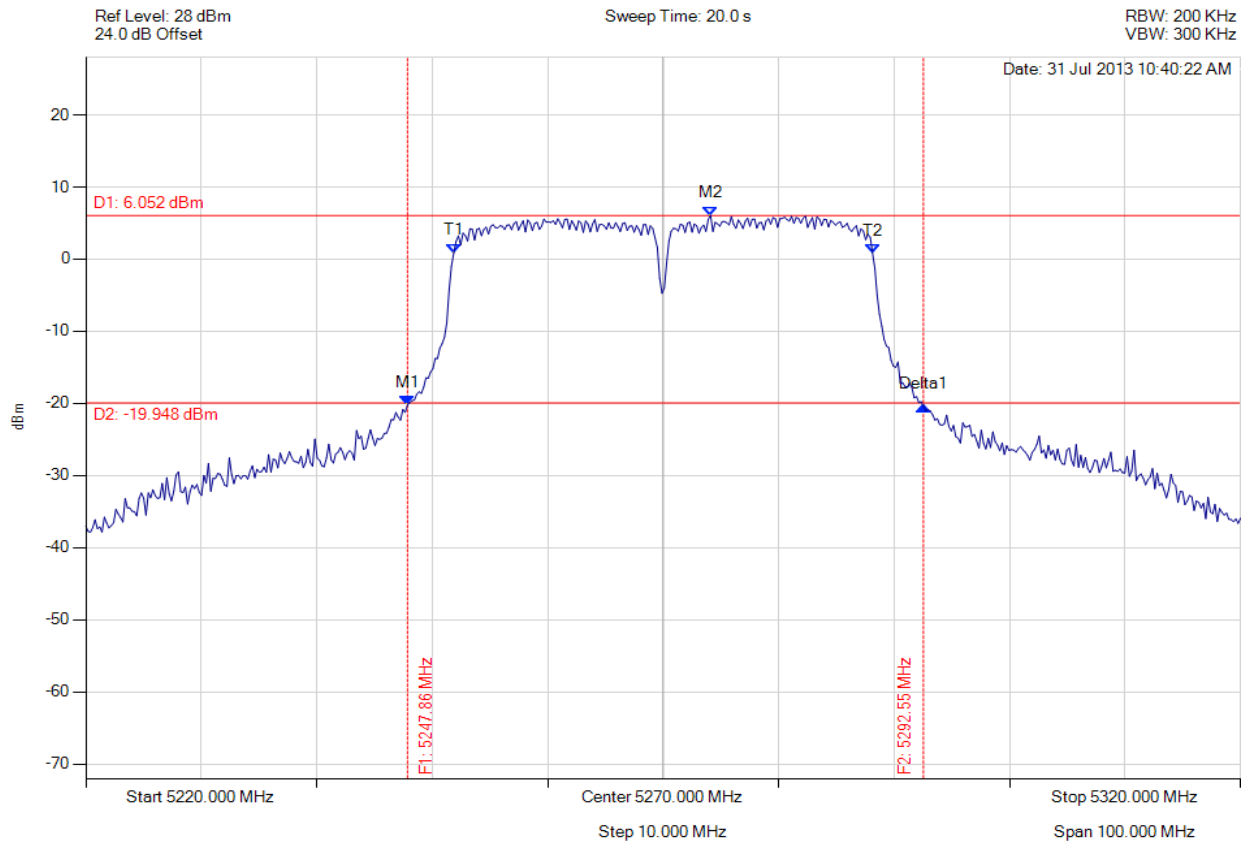

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5247.856 MHz : -20.224 dBm M2 : 5274.108 MHz : 6.052 dBm Delta1 : 44.689 MHz : -0.102 dB T1 : 5251.864 MHz : 0.884 dBm T2 : 5288.136 MHz : 0.813 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 44.689 MHz Measured 99% Bandwidth: 36.273 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

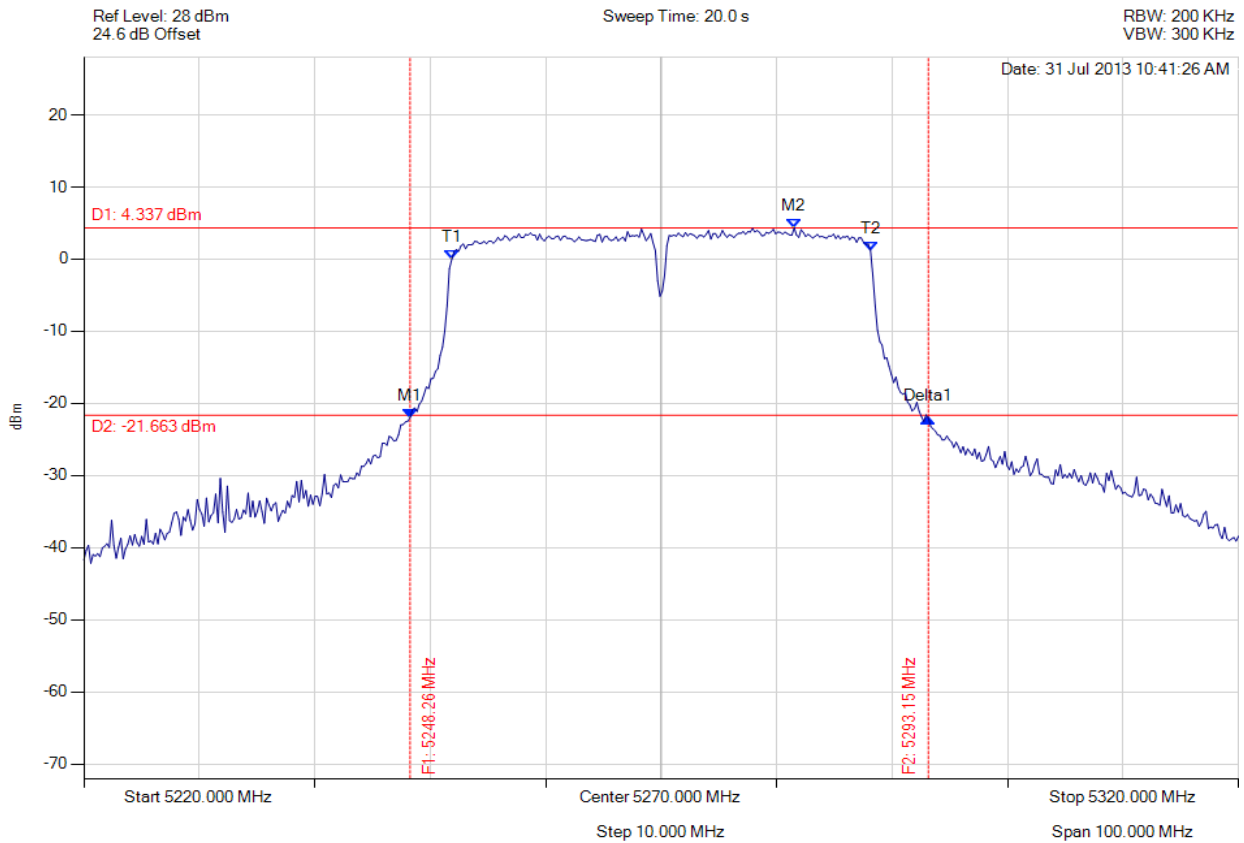

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5248.257 MHz : -21.985 dBm M2 : 5281.523 MHz : 4.337 dBm Delta1 : 44.890 MHz : -0.041 dB T1 : 5251.864 MHz : -0.033 dBm T2 : 5288.136 MHz : 1.130 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 44.890 MHz Measured 99% Bandwidth: 36.273 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

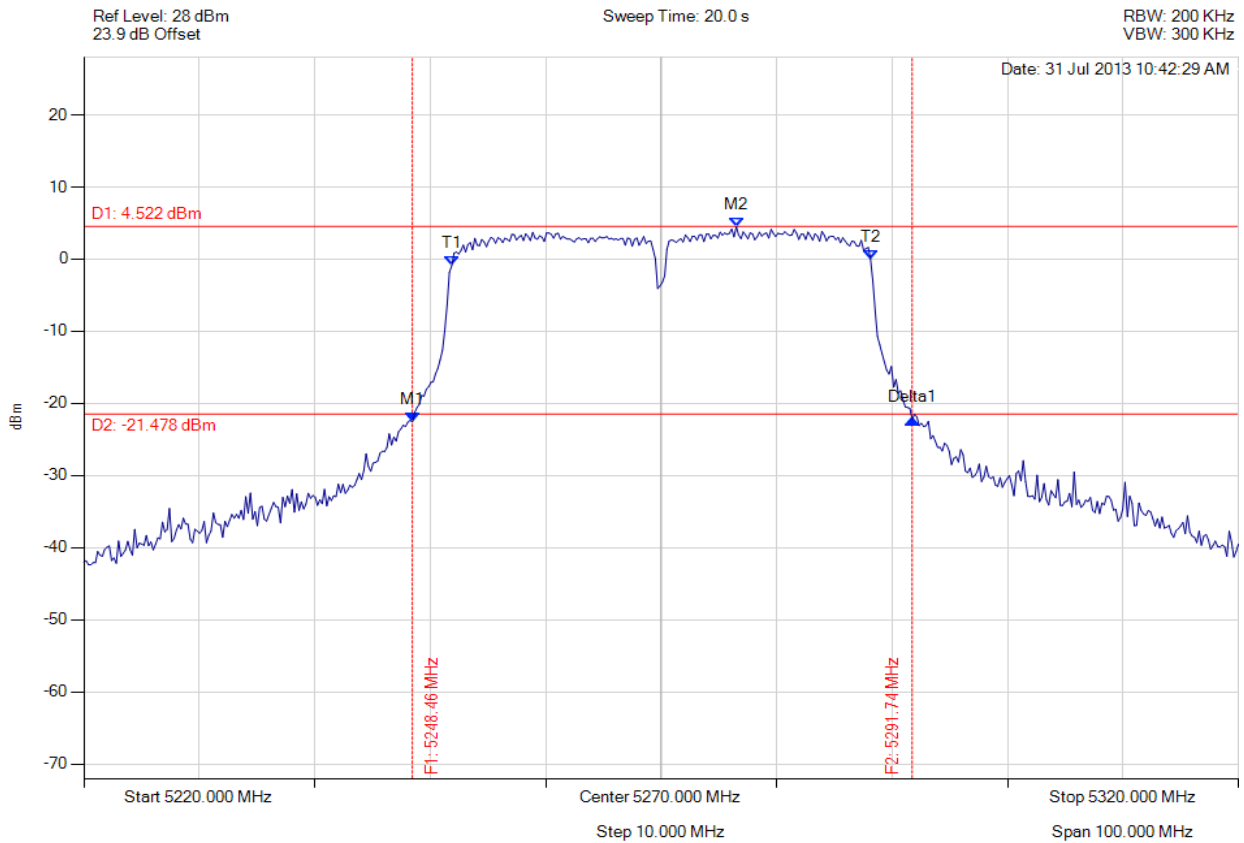

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5248.457 MHz : -22.557 dBm M2 : 5276.513 MHz : 4.522 dBm Delta1 : 43.287 MHz : 0.336 dB T1 : 5251.864 MHz : -0.897 dBm T2 : 5288.136 MHz : -0.033 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 43.287 MHz Measured 99% Bandwidth: 36.273 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

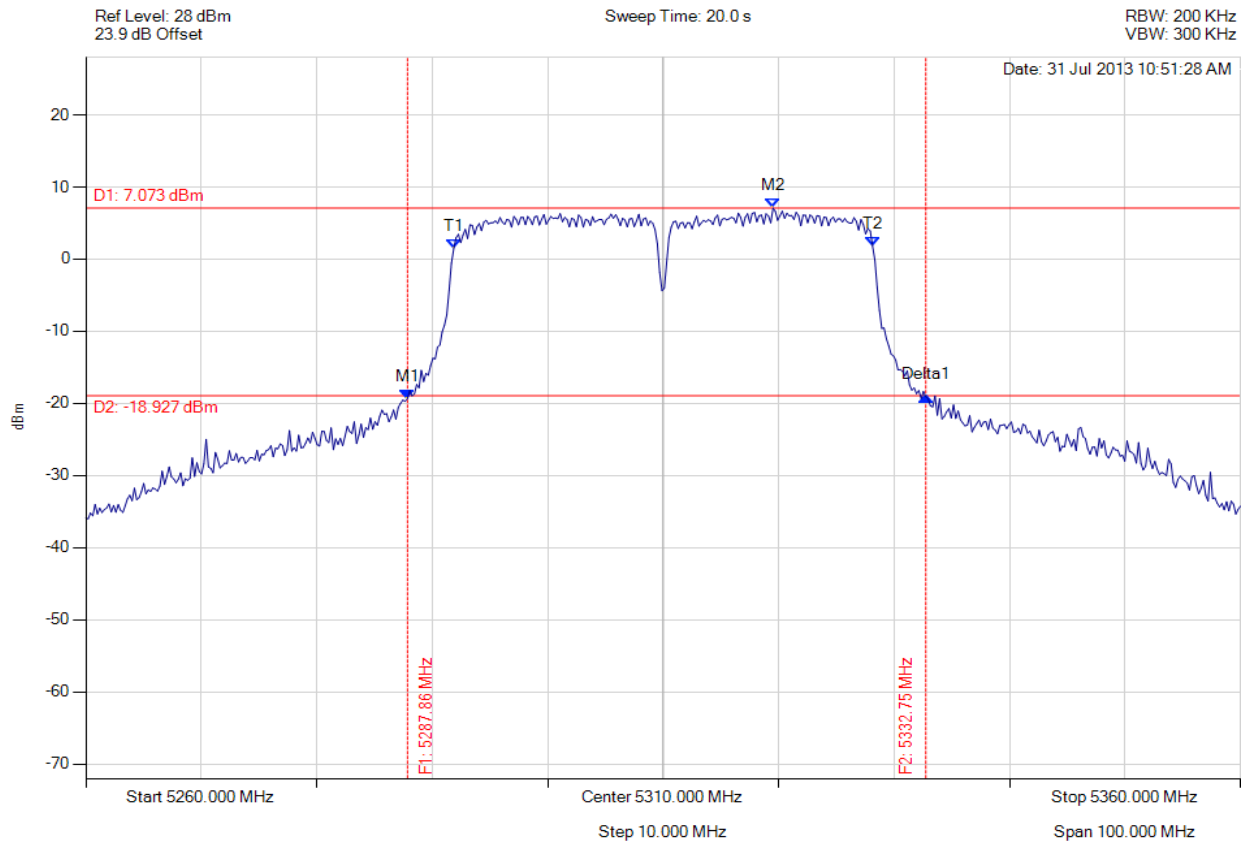

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5287.856 MHz : -19.331 dBm M2 : 5319.519 MHz : 7.073 dBm Delta1 : 44.890 MHz : 0.258 dB T1 : 5291.864 MHz : 1.458 dBm T2 : 5328.136 MHz : 1.824 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 44.890 MHz Measured 99% Bandwidth: 36.273 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

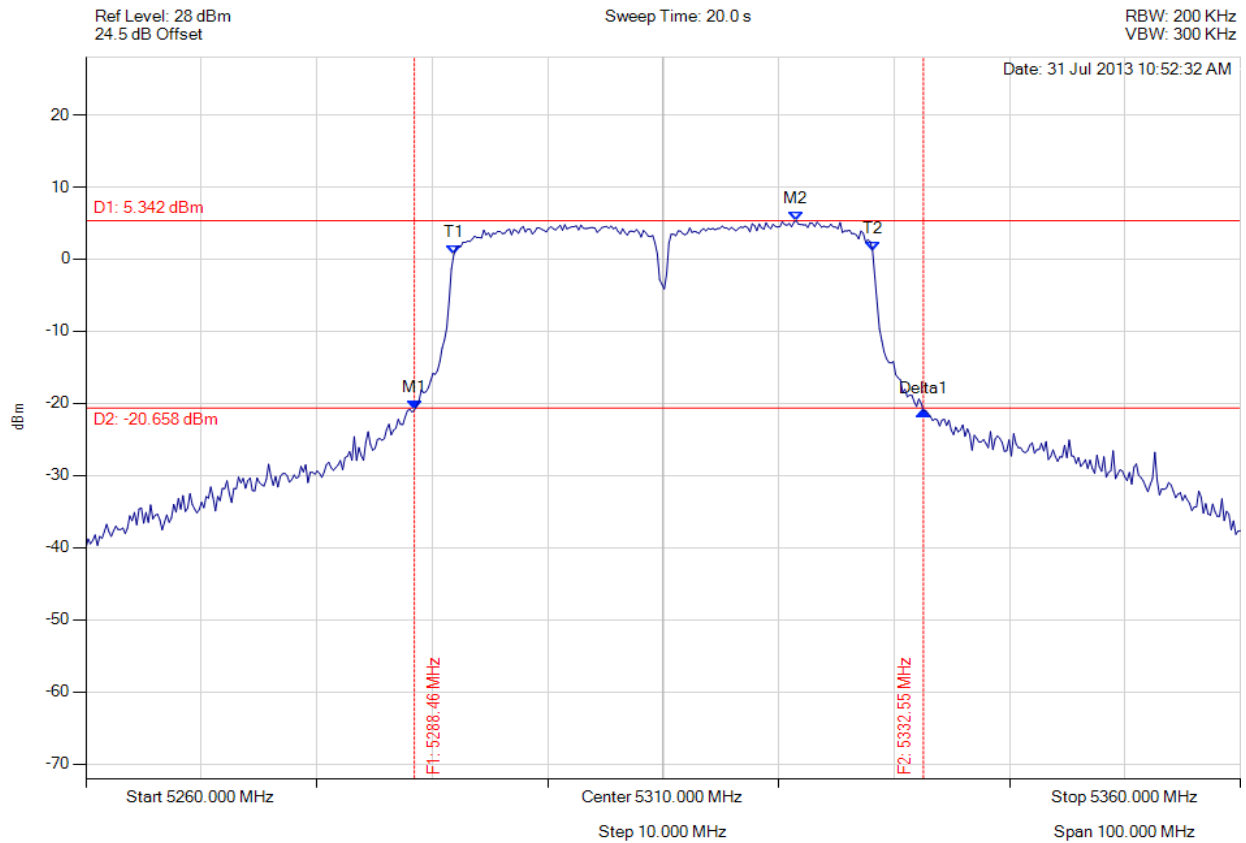

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5288.457 MHz : -20.879 dBm M2 : 5321.523 MHz : 5.342 dBm Delta1 : 44.088 MHz : -0.183 dB T1 : 5291.864 MHz : 0.605 dBm T2 : 5328.136 MHz : 1.183 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 44.088 MHz Measured 99% Bandwidth: 36.273 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

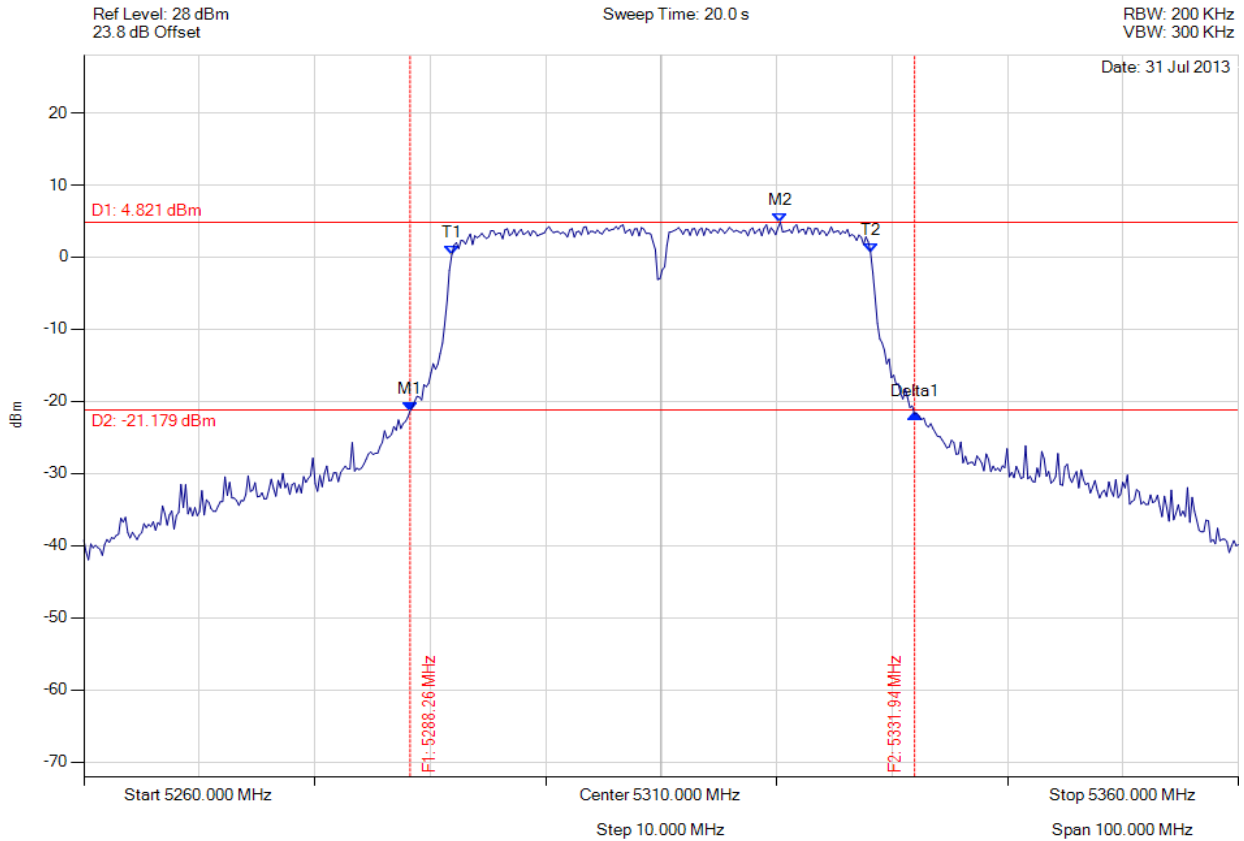

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5288.257 MHz : -21.314 dBm M2 : 5320.321 MHz : 4.821 dBm Delta1 : 43.687 MHz : -0.443 dB T1 : 5291.864 MHz : 0.286 dBm T2 : 5328.136 MHz : 0.650 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 43.687 MHz Measured 99% Bandwidth: 36.273 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

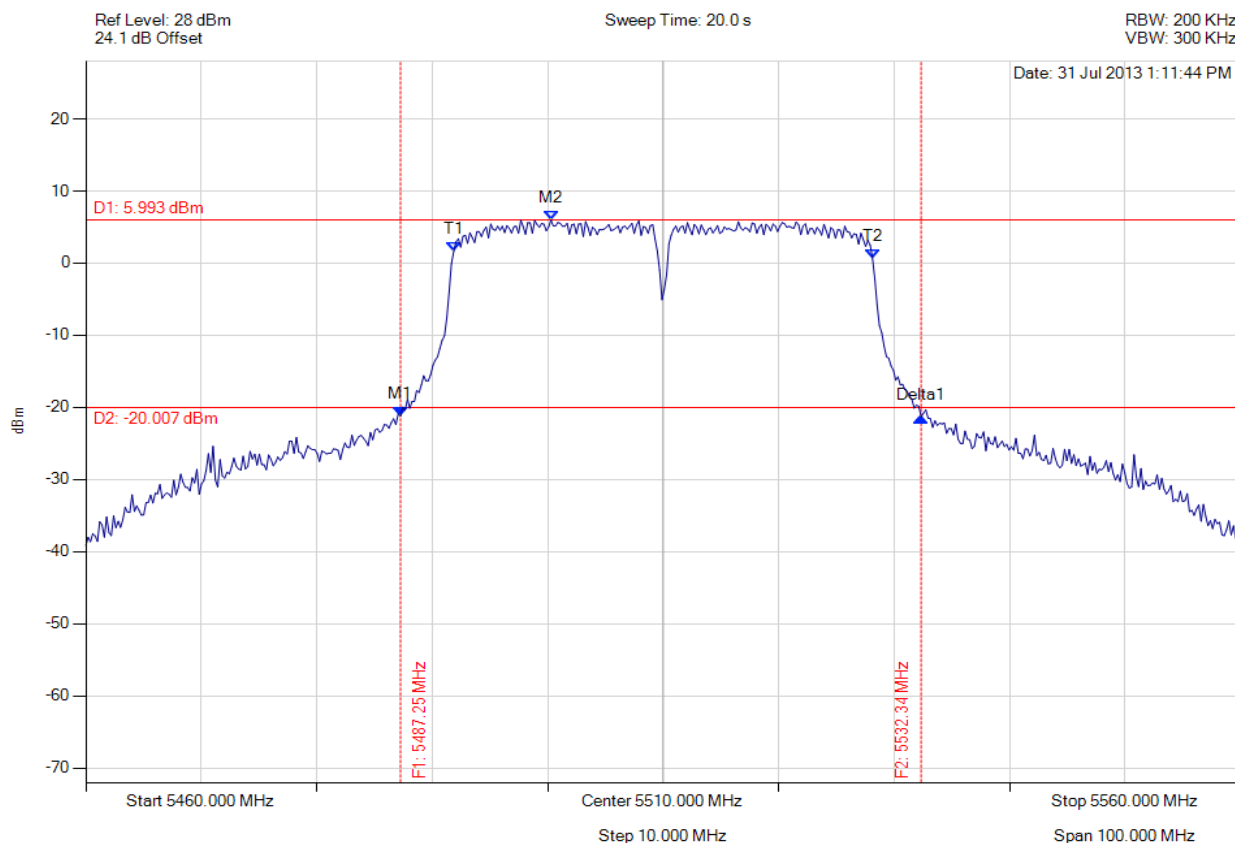

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5487.255 MHz : -21.204 dBm M2 : 5500.281 MHz : 5.993 dBm Delta1 : 45.090 MHz : -0.128 dB T1 : 5491.864 MHz : 1.651 dBm T2 : 5528.136 MHz : 0.603 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 45.090 MHz Measured 99% Bandwidth: 36.273 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 128 of 196



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

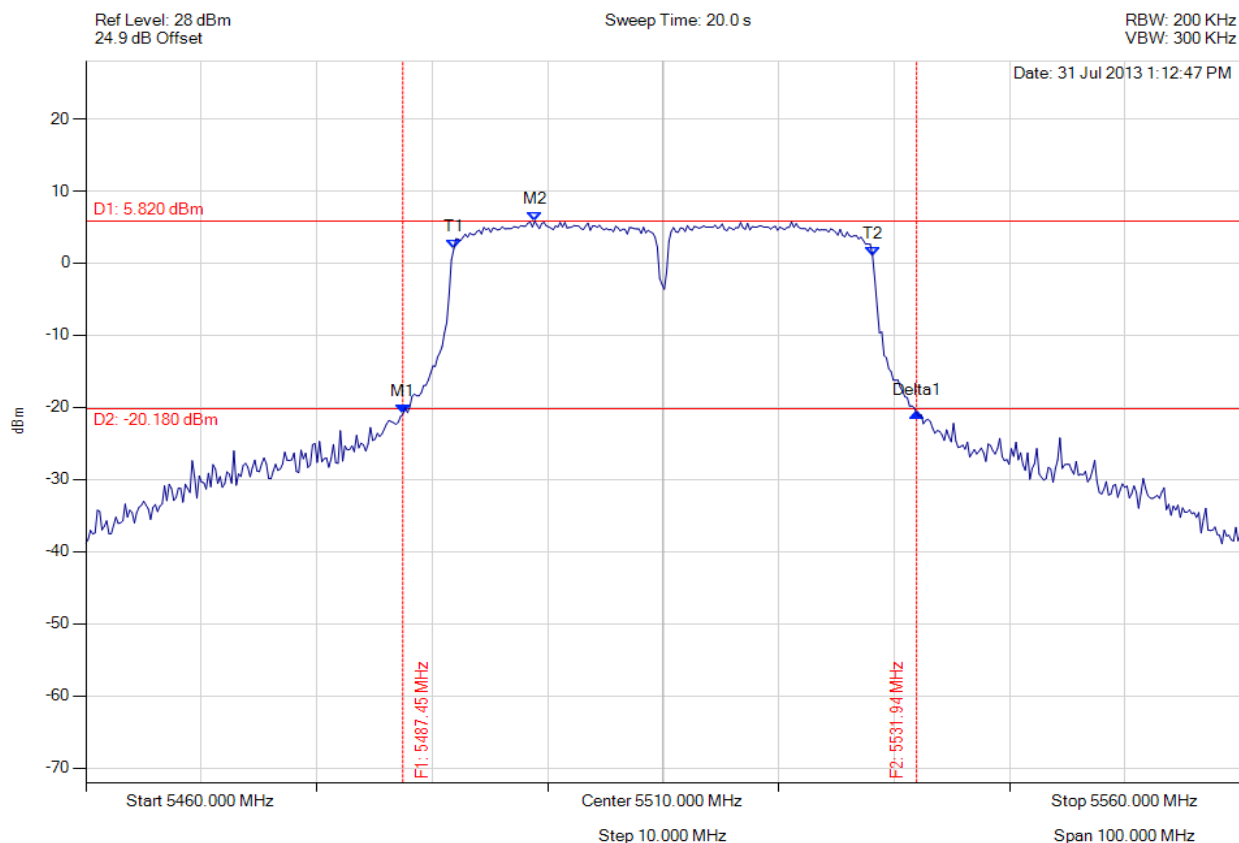

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5487.455 MHz : -20.922 dBm M2 : 5498.878 MHz : 5.820 dBm Delta1 : 44.489 MHz : 0.187 dB T1 : 5491.864 MHz : 1.958 dBm T2 : 5528.136 MHz : 1.018 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 44.489 MHz Measured 99% Bandwidth: 36.273 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

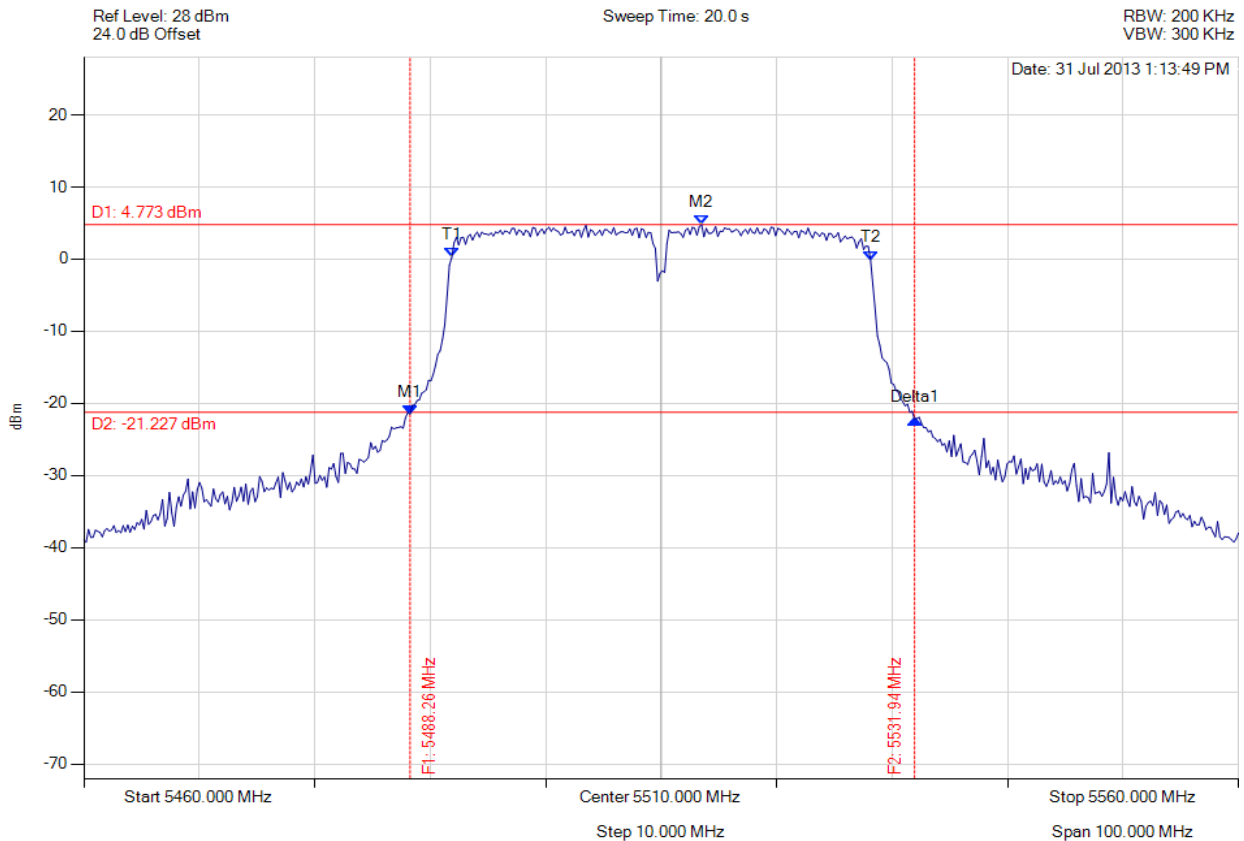

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5488.257 MHz : -21.487 dBm M2 : 5513.507 MHz : 4.773 dBm Delta1 : 43.687 MHz : -0.710 dB T1 : 5491.864 MHz : 0.239 dBm T2 : 5528.136 MHz : -0.121 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 43.687 MHz Measured 99% Bandwidth: 36.273 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

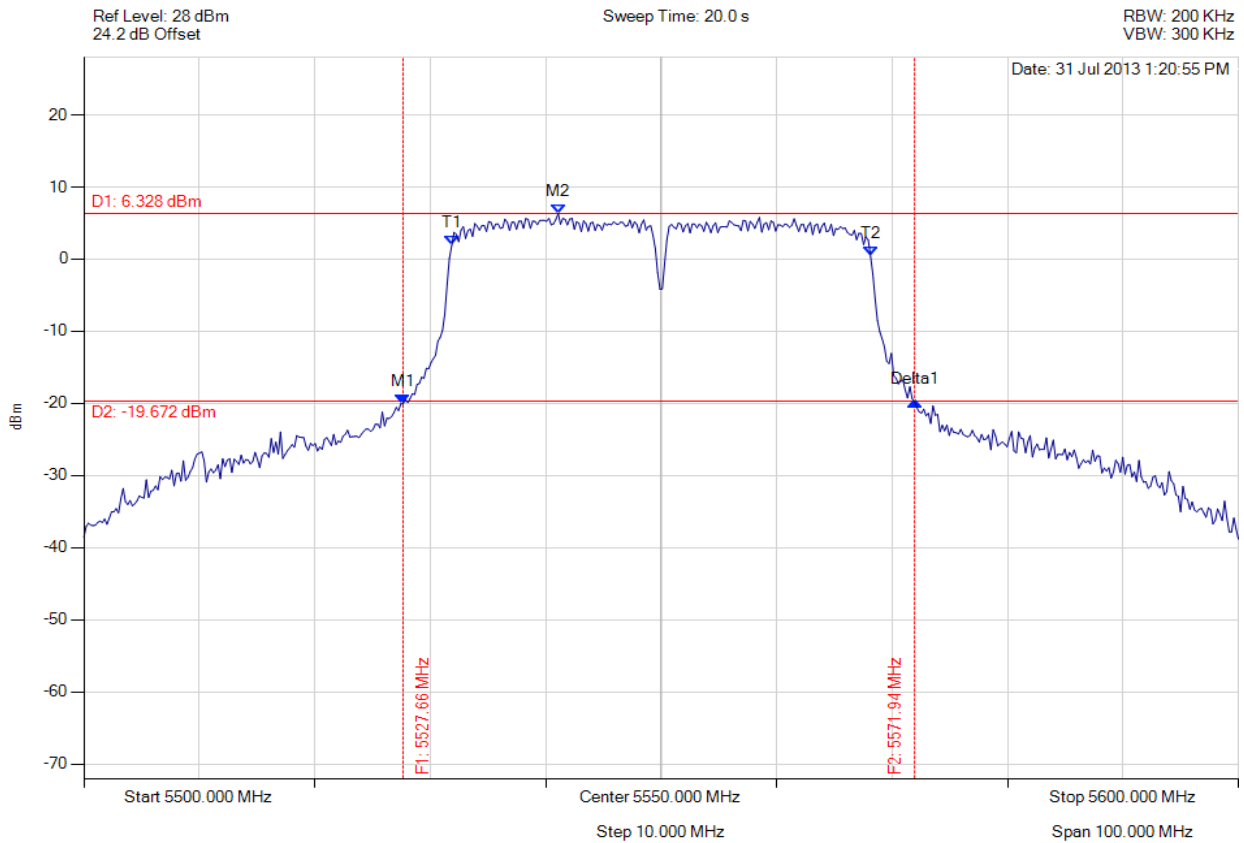

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5527.655 MHz : -20.064 dBm M2 : 5541.082 MHz : 6.328 dBm Delta1 : 44.289 MHz : 0.340 dB T1 : 5531.864 MHz : 1.913 dBm T2 : 5568.136 MHz : 0.412 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 44.289 MHz Measured 99% Bandwidth: 36.273 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 131 of 196



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

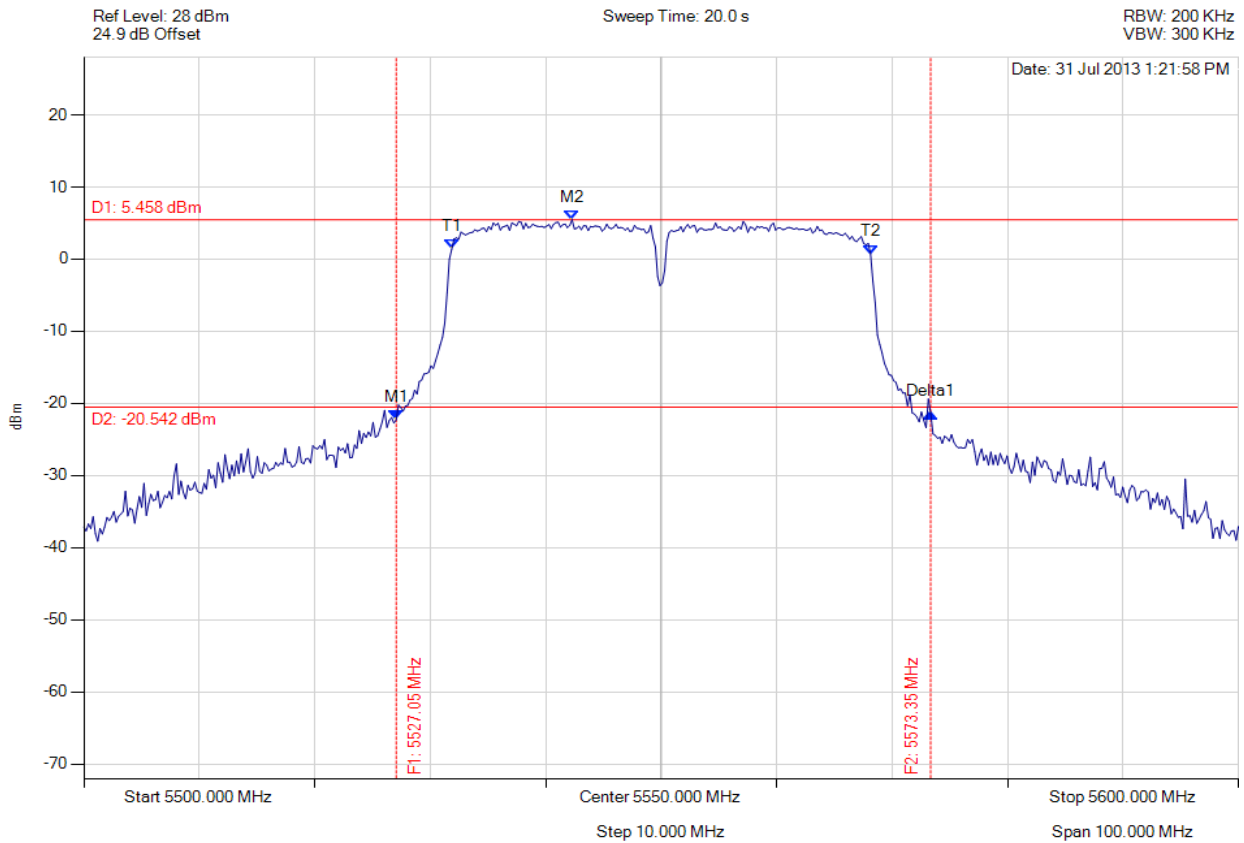

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5527.054 MHz : -22.268 dBm M2 : 5542.285 MHz : 5.458 dBm Delta1 : 46.293 MHz : 0.820 dB T1 : 5531.864 MHz : 1.395 dBm T2 : 5568.136 MHz : 0.715 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 46.293 MHz Measured 99% Bandwidth: 36.273 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 132 of 196



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

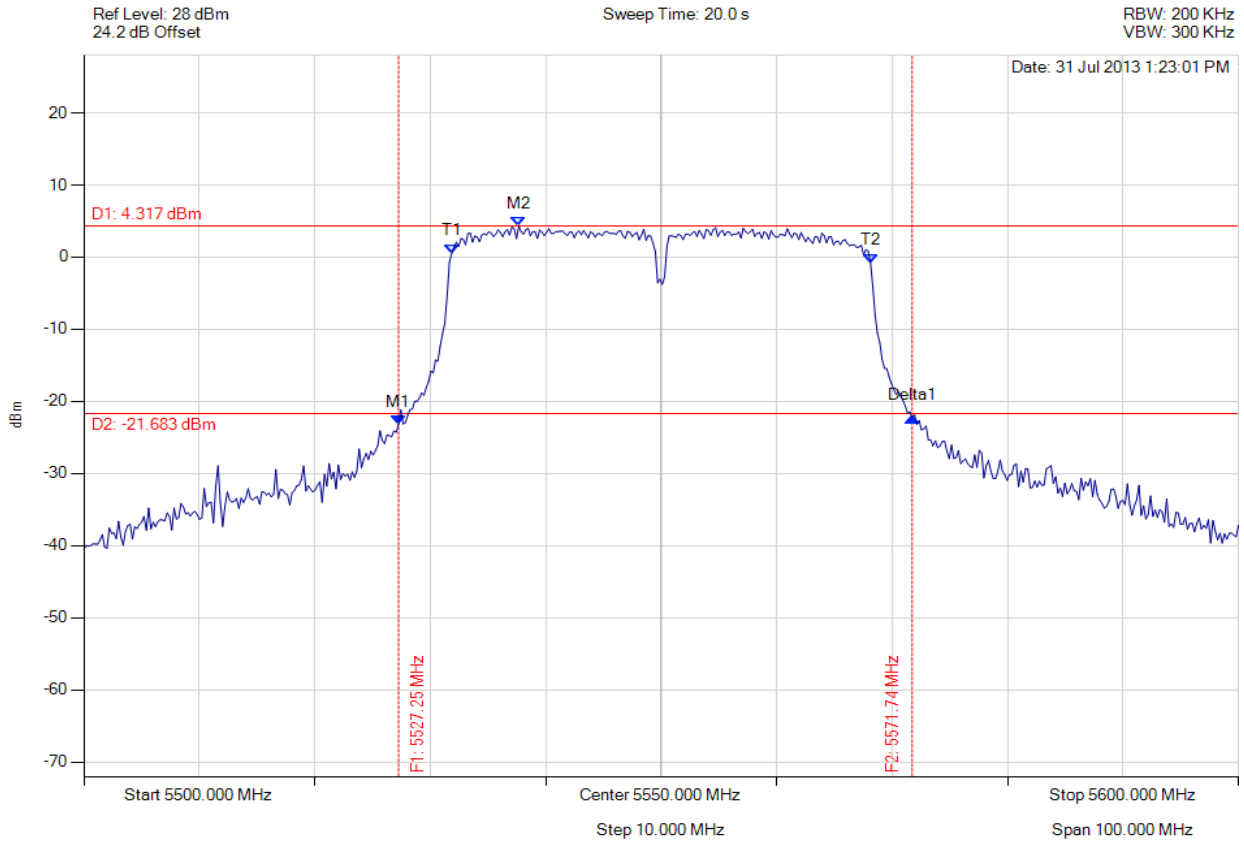

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5527.255 MHz : -23.218 dBm M2 : 5537.675 MHz : 4.317 dBm Delta1 : 44.489 MHz : 0.950 dB T1 : 5531.864 MHz : 0.546 dBm T2 : 5568.136 MHz : -0.790 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 44.489 MHz Measured 99% Bandwidth: 36.273 MHz


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5670.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

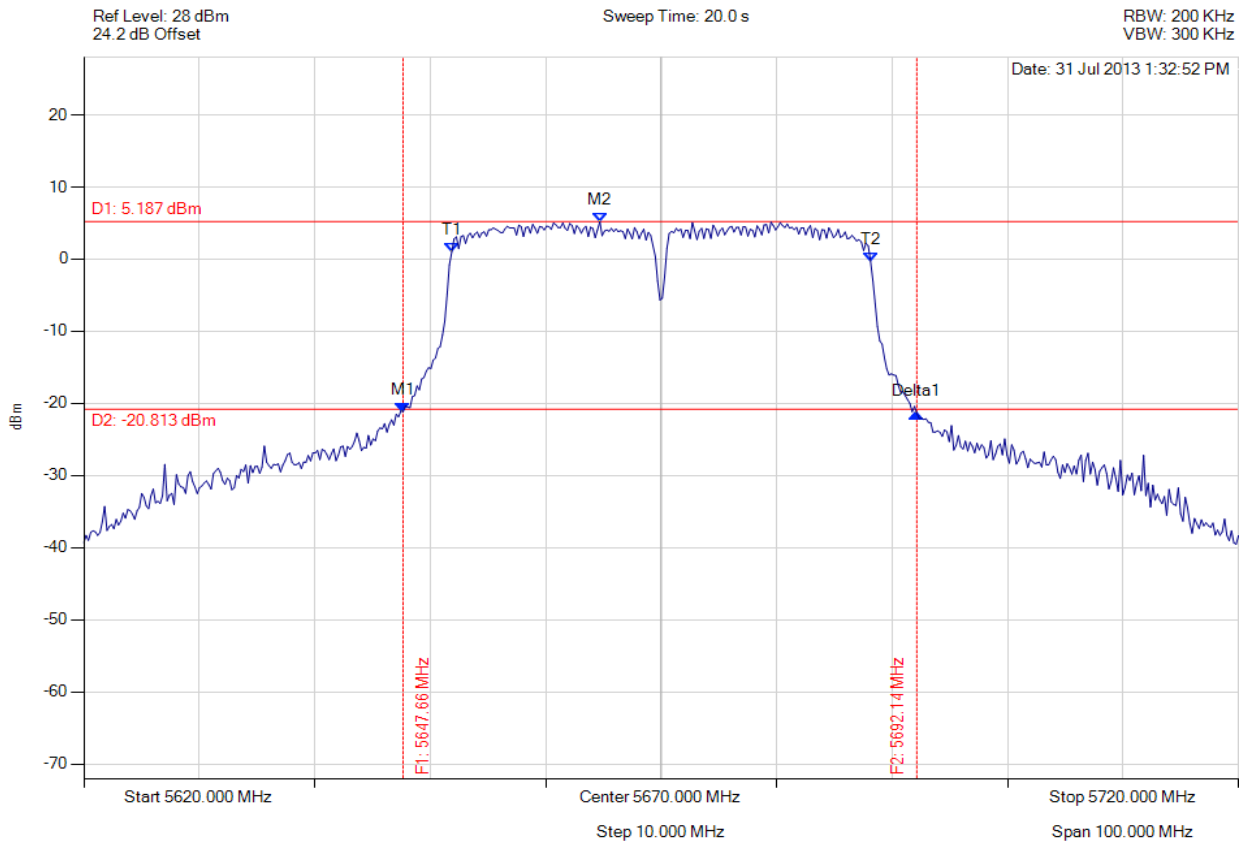

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5647.655 MHz : -21.143 dBm M2 : 5664.689 MHz : 5.187 dBm Delta1 : 44.489 MHz : -0.218 dB T1 : 5651.864 MHz : 0.978 dBm T2 : 5688.136 MHz : -0.306 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 44.489 MHz Measured 99% Bandwidth: 36.273 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 134 of 196



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5670.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

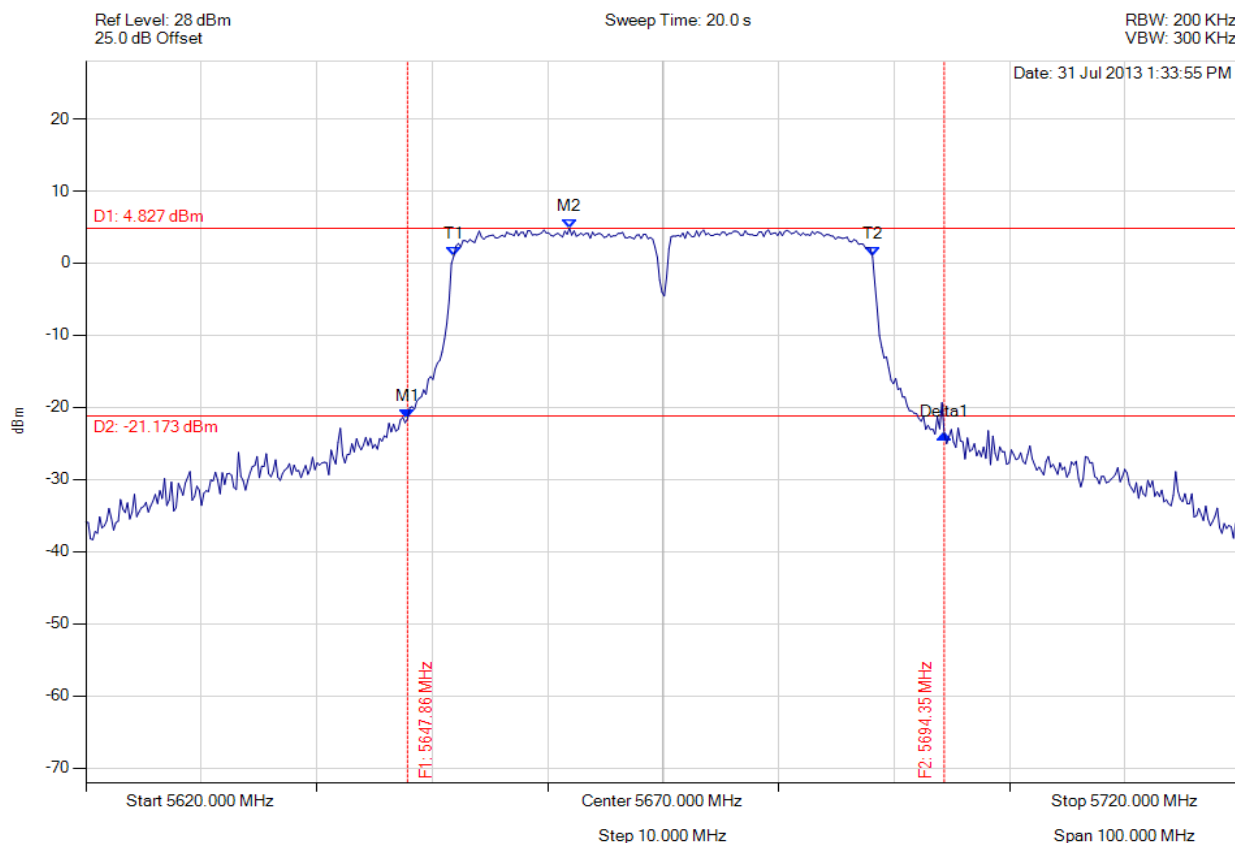

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5647.856 MHz : -21.601 dBm M2 : 5661.884 MHz : 4.827 dBm Delta1 : 46.493 MHz : -2.089 dB T1 : 5651.864 MHz : 0.986 dBm T2 : 5688.136 MHz : 0.898 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 46.493 MHz Measured 99% Bandwidth: 36.273 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 135 of 196



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5670.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

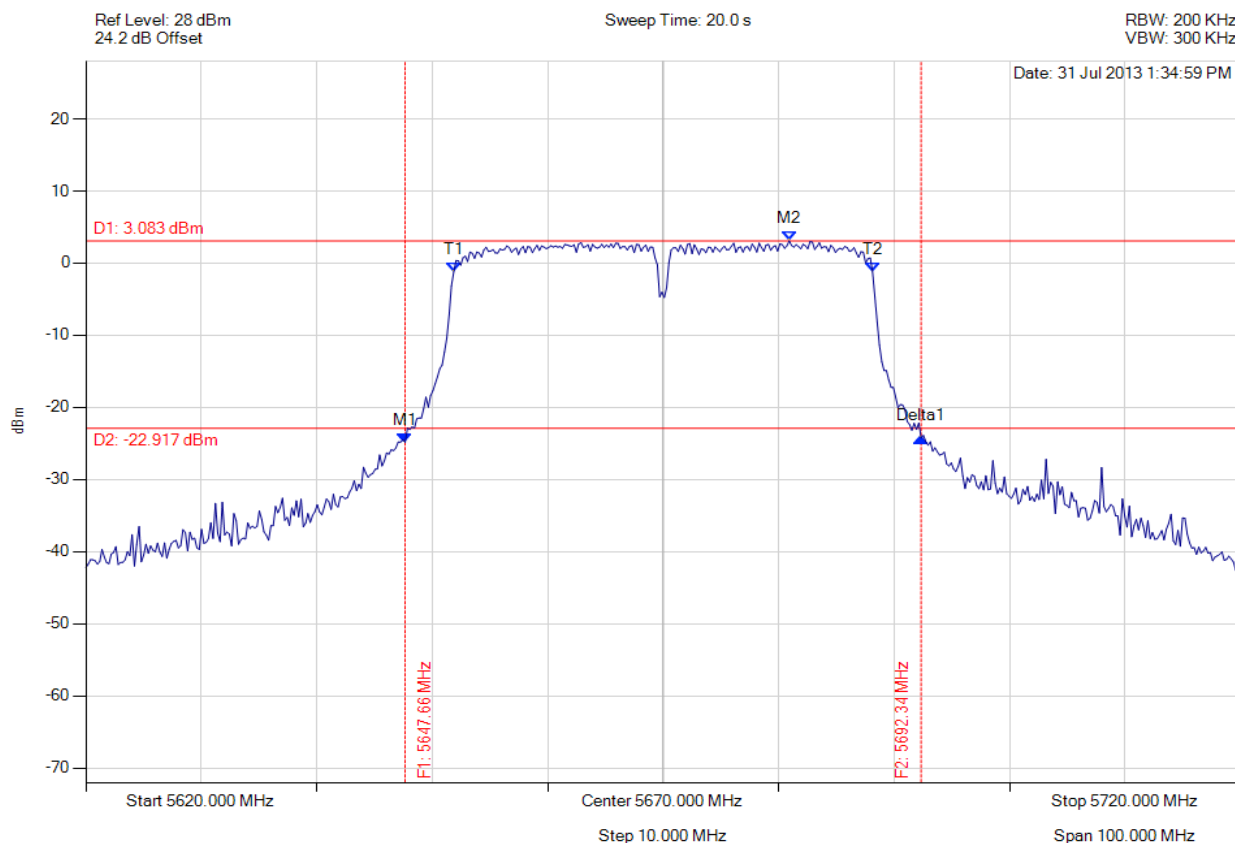

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5647.655 MHz : -24.841 dBm M2 : 5680.922 MHz : 3.083 dBm Delta1 : 44.689 MHz : 0.592 dB T1 : 5651.864 MHz : -1.209 dBm T2 : 5688.136 MHz : -1.215 dBm OBW : 36.273 MHz	Measured 26 dB Bandwidth: 44.689 MHz Measured 99% Bandwidth: 36.273 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




A.1.2. Peak Power Spectral Density



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5260.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

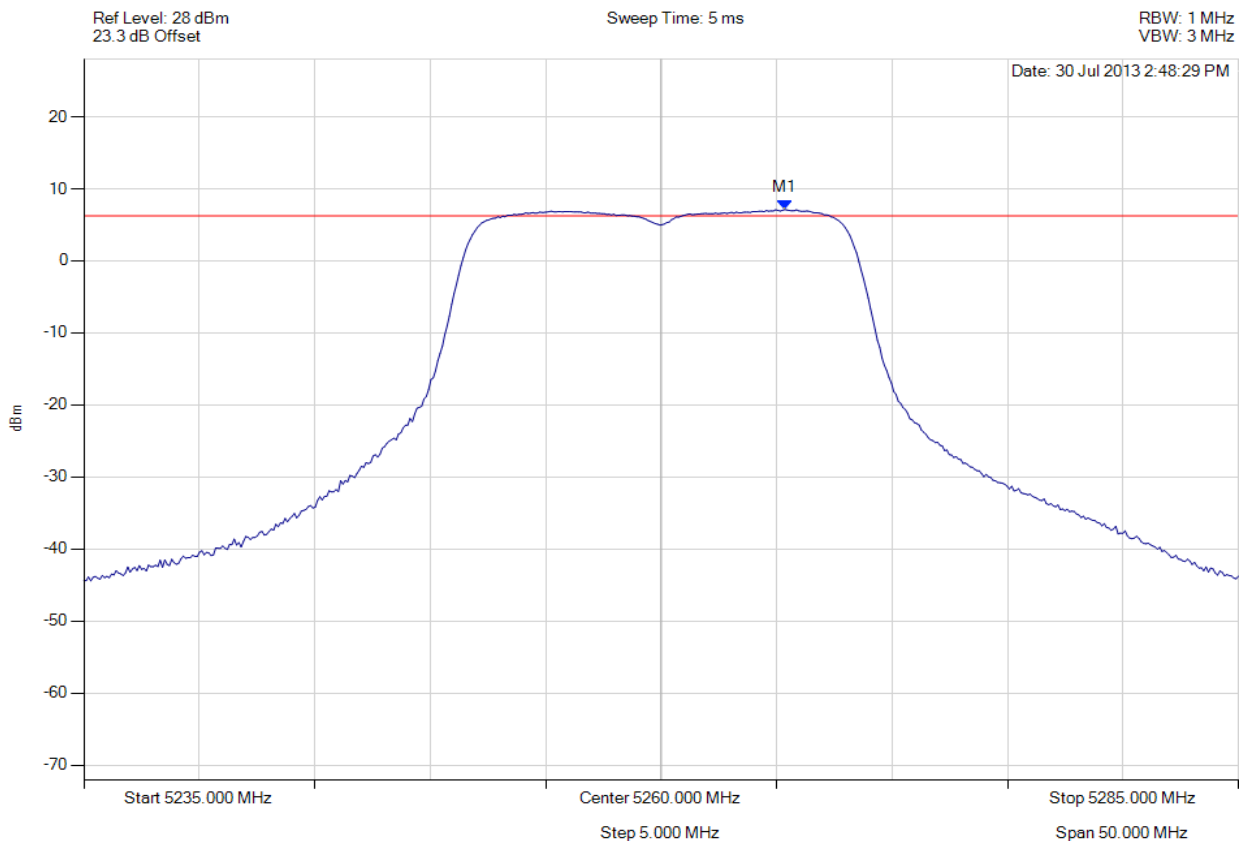

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5265.361 MHz : 7.113 dBm	Limit: ≤ 6.229 dBm Margin: 0.88 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 137 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5260.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

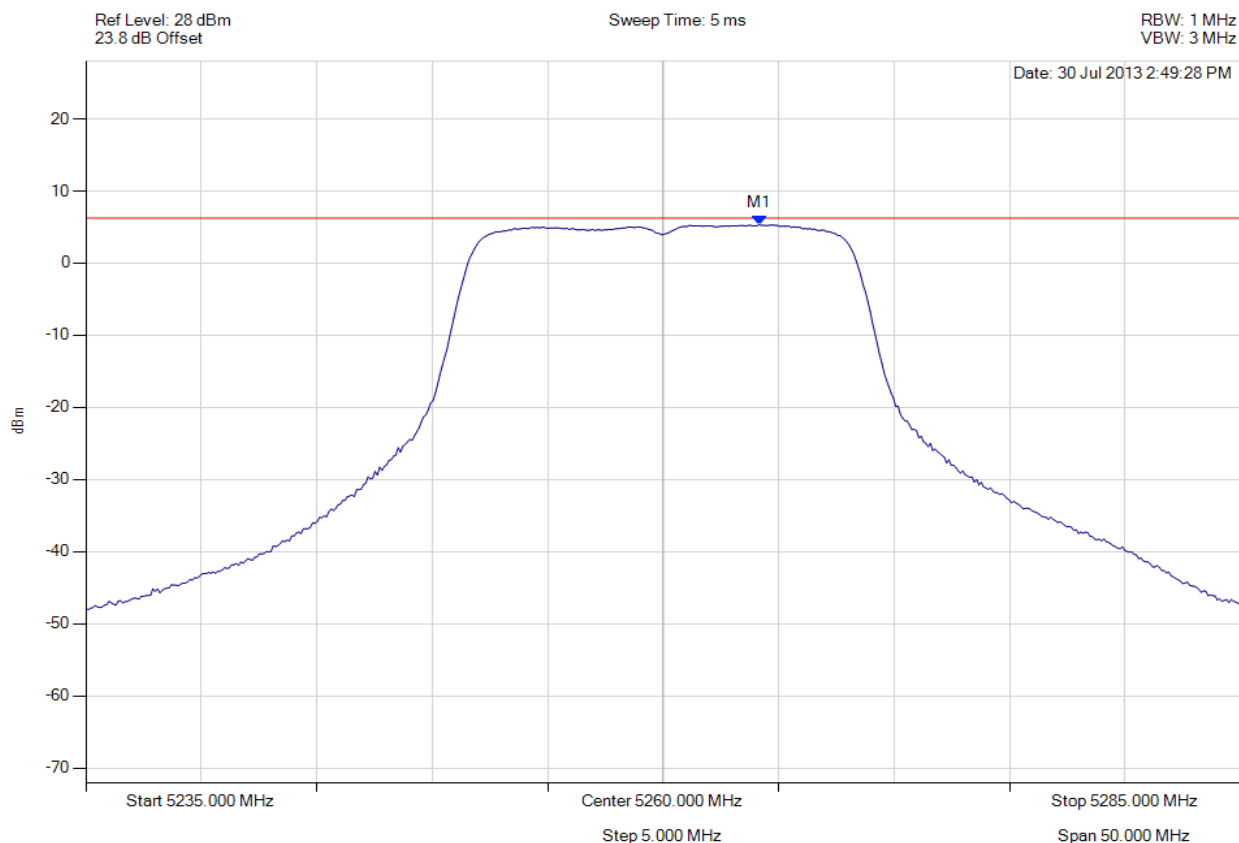

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5264.158 MHz : 5.335 dBm	Limit: ≤ 6.229 dBm Margin: -0.89 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 138 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5260.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

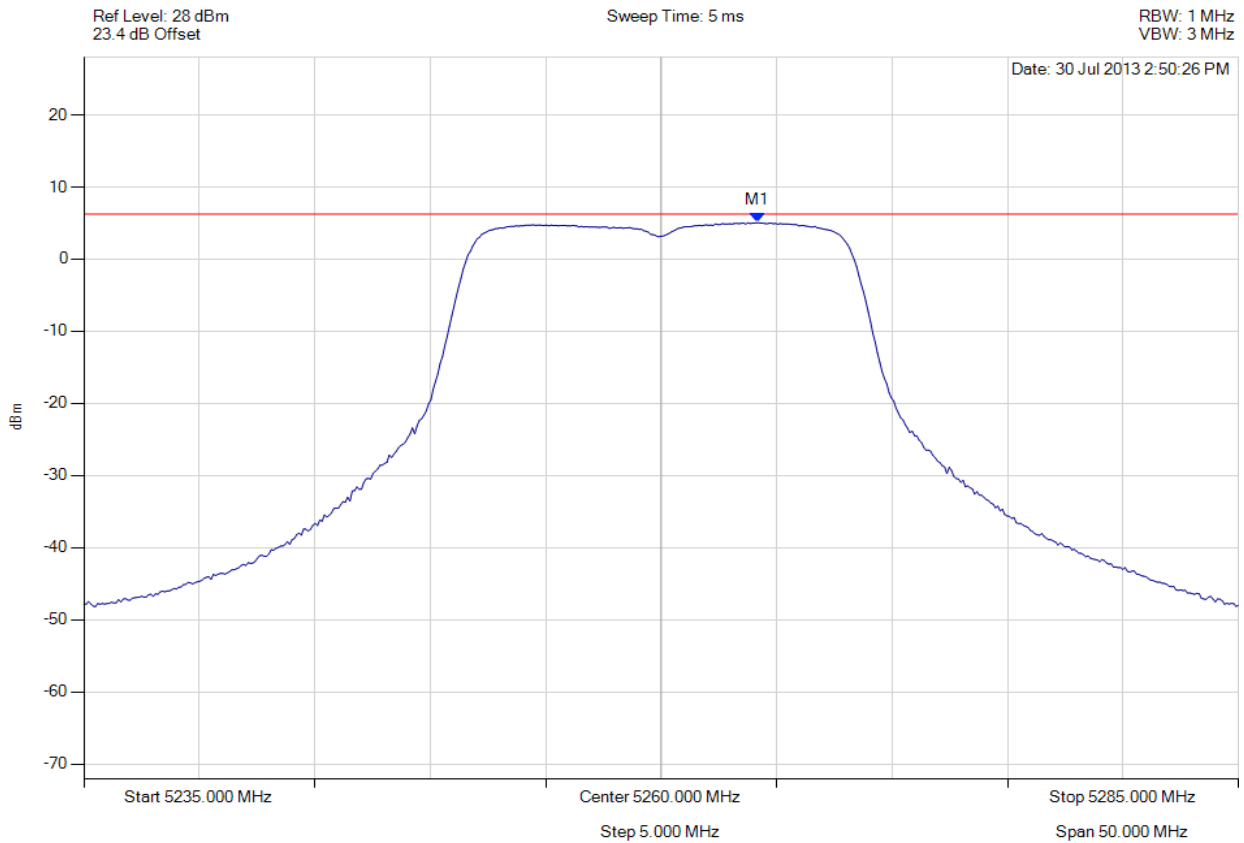

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5264.158 MHz : 5.062 dBm	Limit: ≤ 6.229 dBm Margin: -1.17 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 139 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5300.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

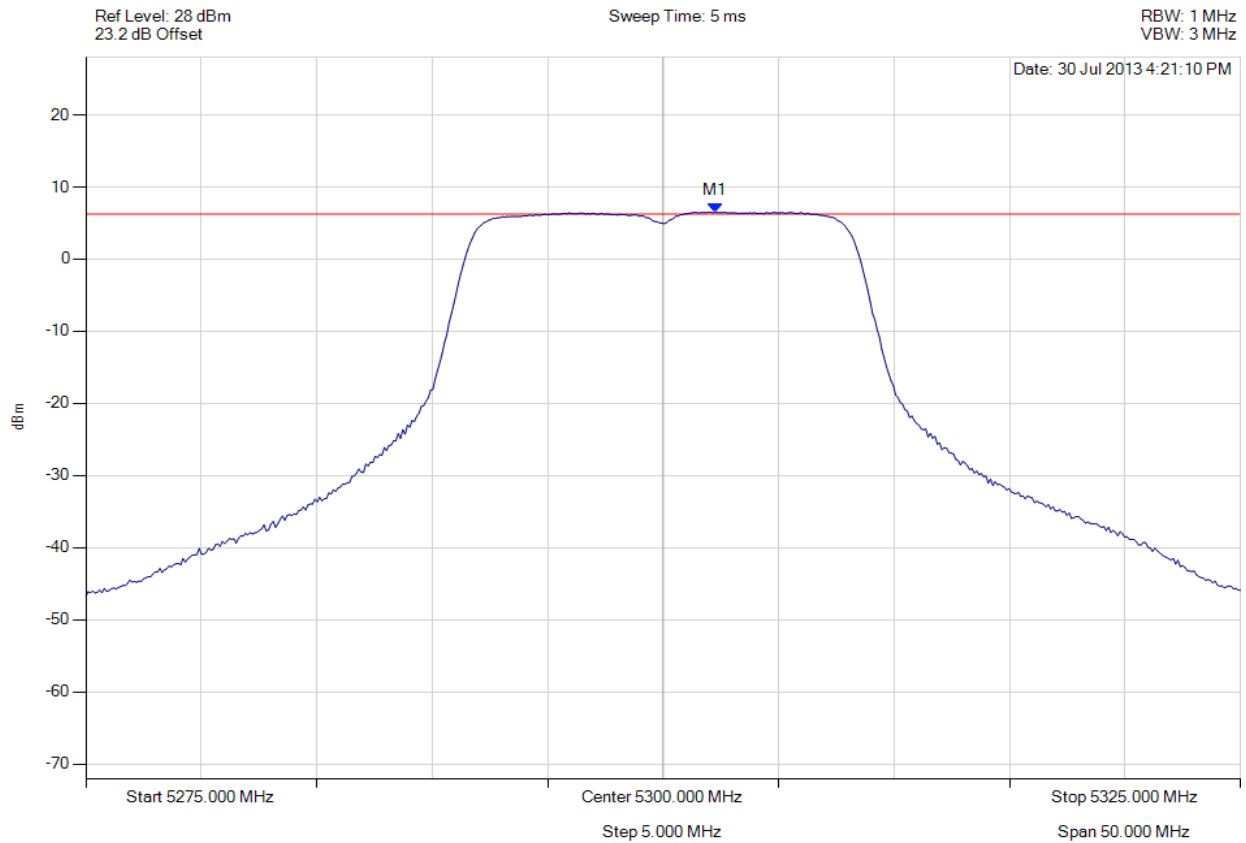

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5302.255 MHz : 6.521 dBm	Limit: ≤ 6.229 dBm Margin: 0.29 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 140 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5300.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

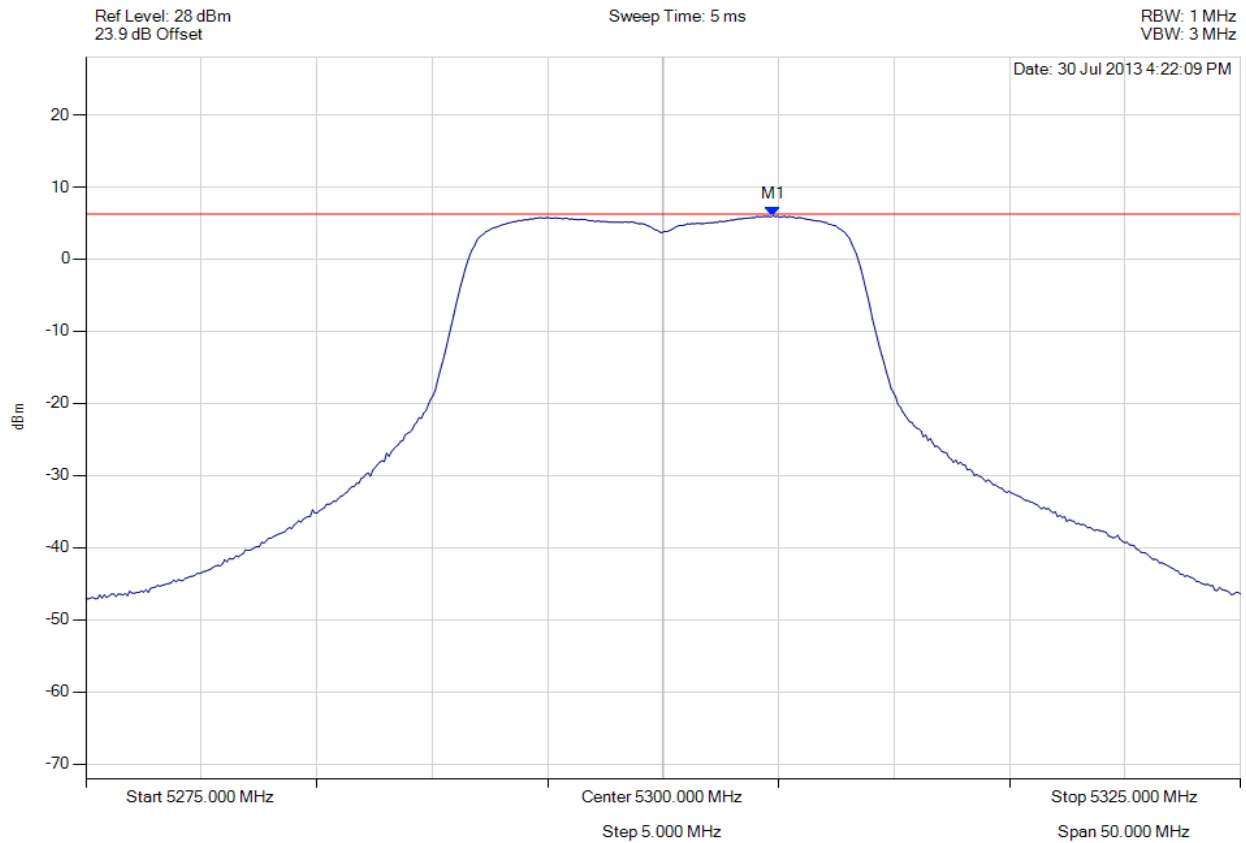

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5304.760 MHz : 6.013 dBm	Limit: ≤ 6.229 dBm Margin: -0.22 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 141 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5300.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

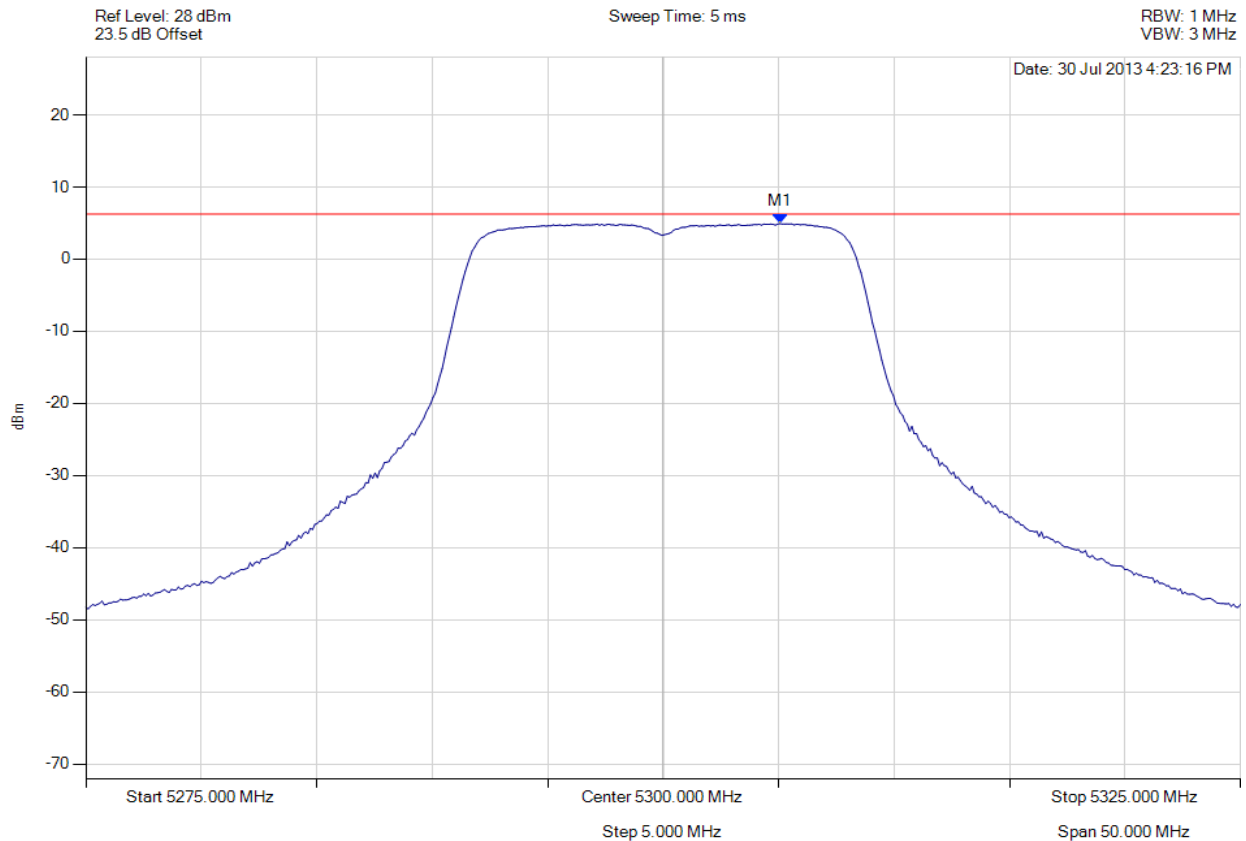

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5305.060 MHz : 4.924 dBm	Limit: ≤ 6.229 dBm Margin: -1.30 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 142 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5320.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

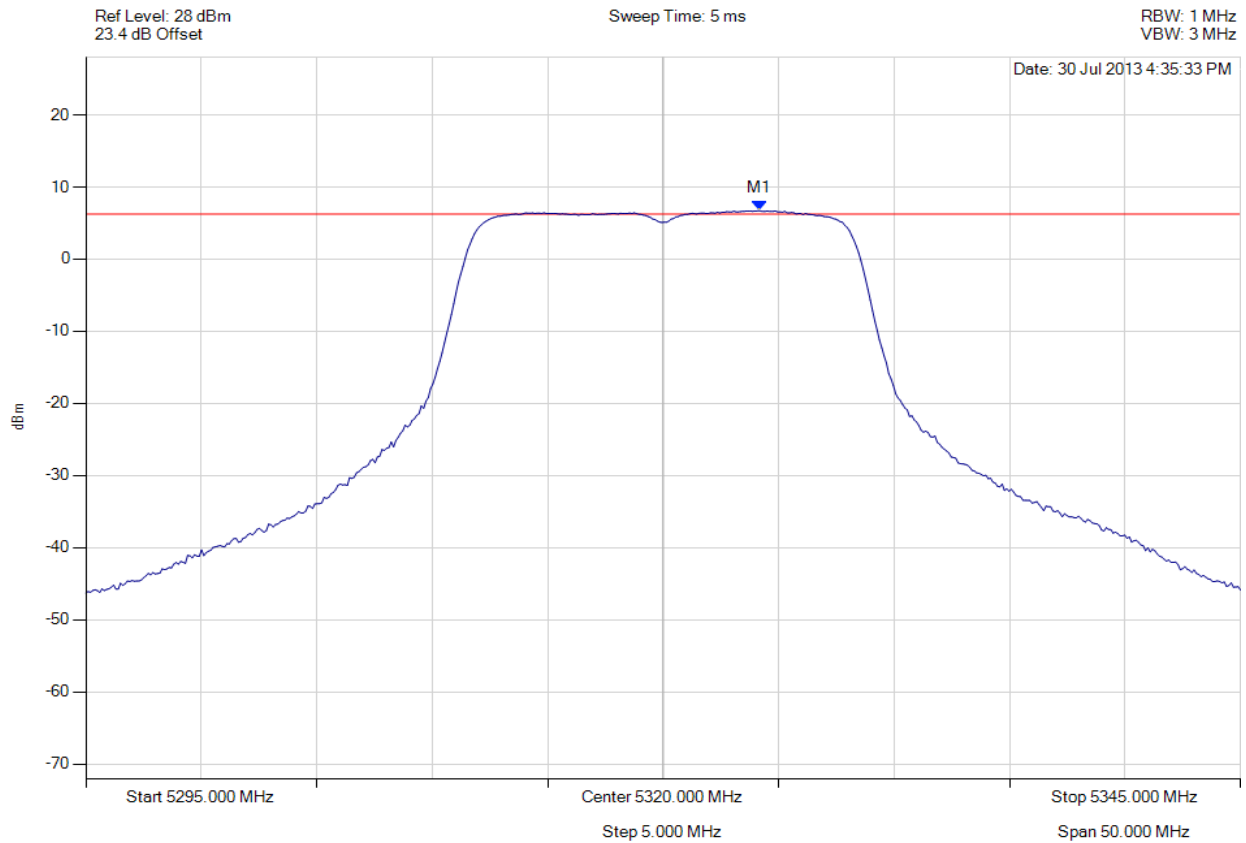

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5324.158 MHz : 6.727 dBm	Limit: ≤ 6.229 dBm Margin: 0.50 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 143 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5320.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

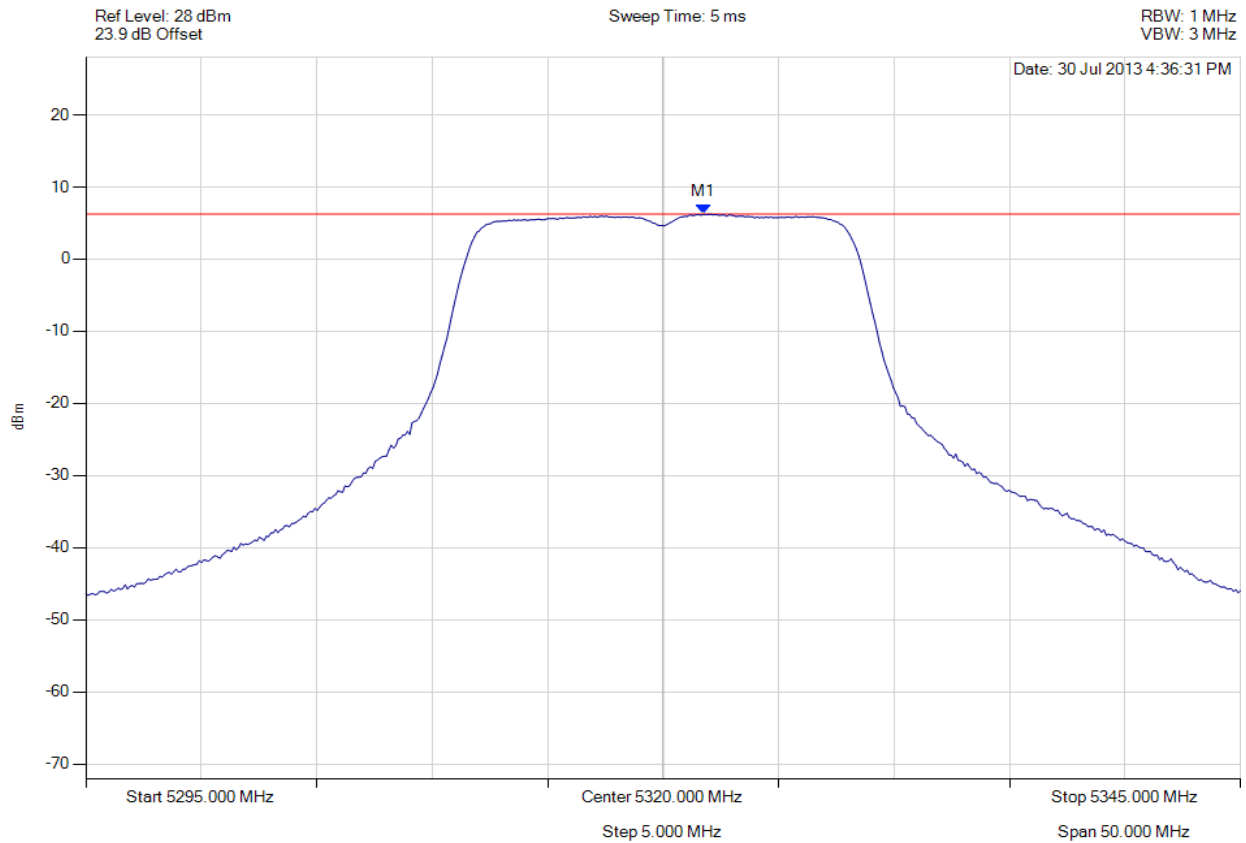

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5321.754 MHz : 6.226 dBm	Limit: ≤ 6.229 dBm Margin: 0.00 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 144 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5320.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

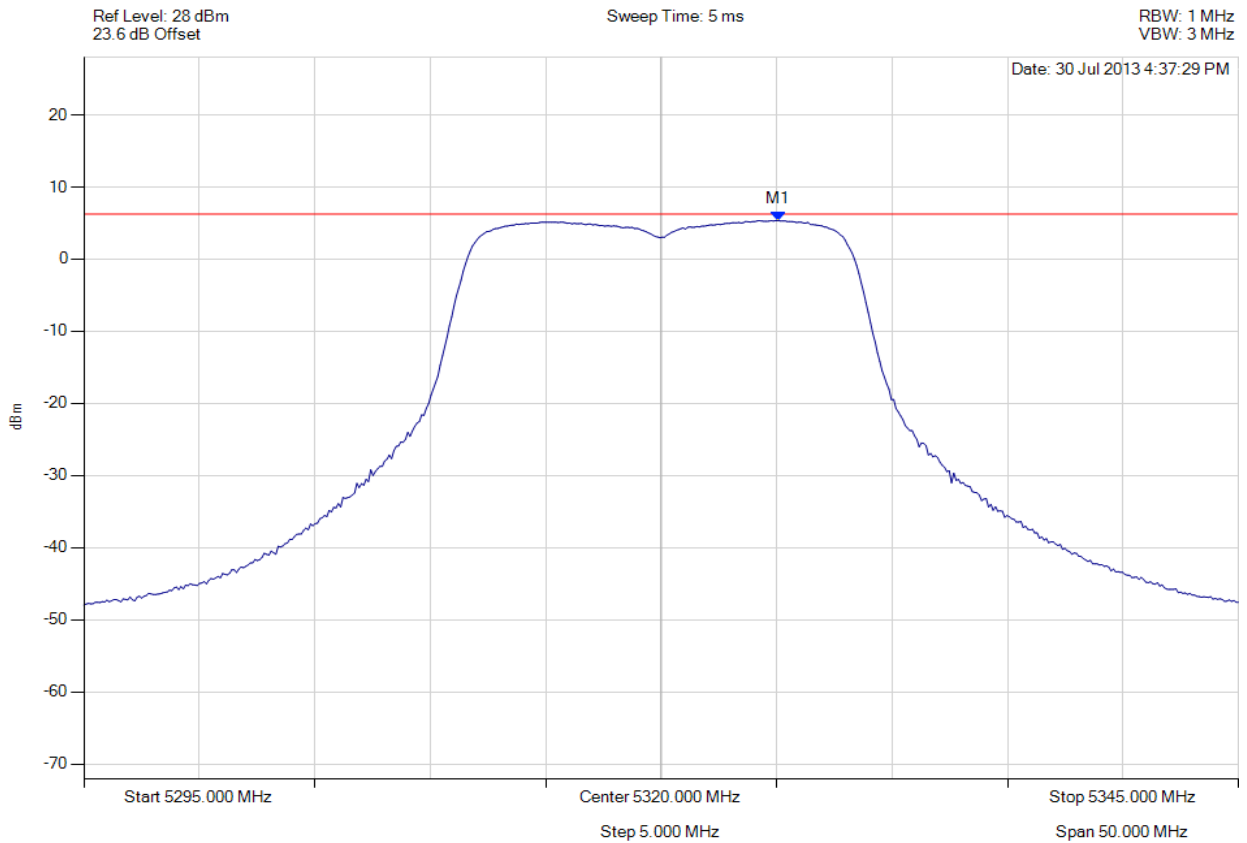

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5325.060 MHz : 5.348 dBm	Limit: ≤ 6.229 dBm Margin: -0.88 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 145 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5500.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

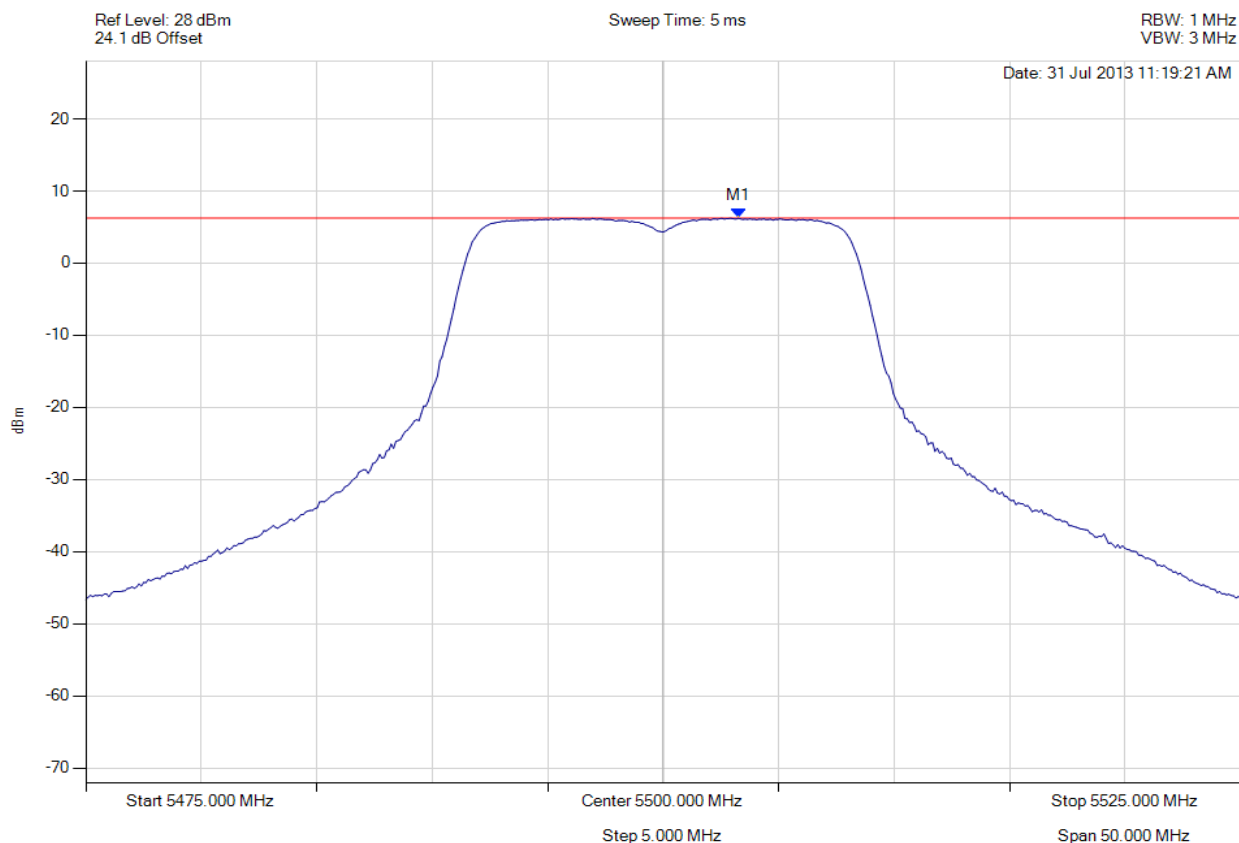

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5503.257 MHz : 6.230 dBm	Limit: ≤ 6.229 dBm Margin: 0.00 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 146 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5500.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

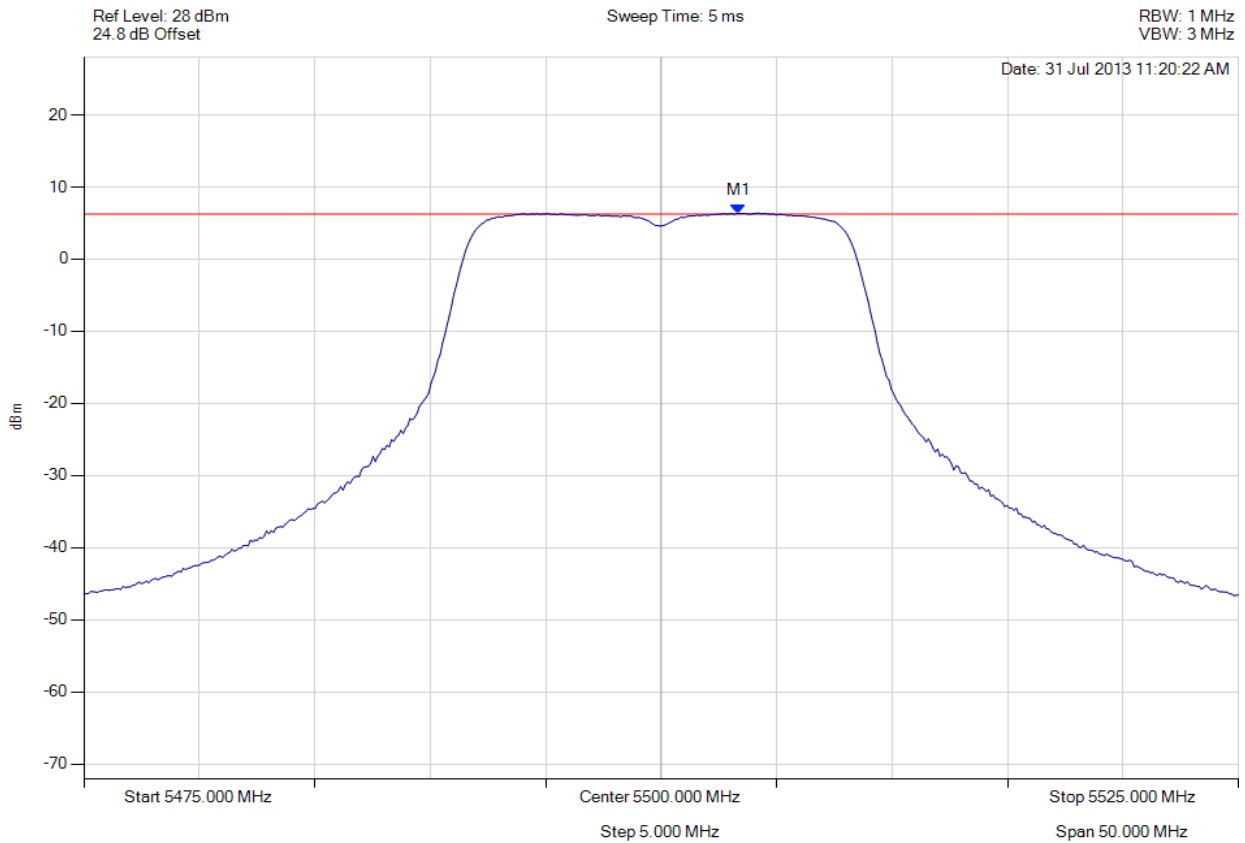

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5503.357 MHz : 6.379 dBm	Limit: ≤ 6.229 dBm Margin: 0.15 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 147 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5500.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

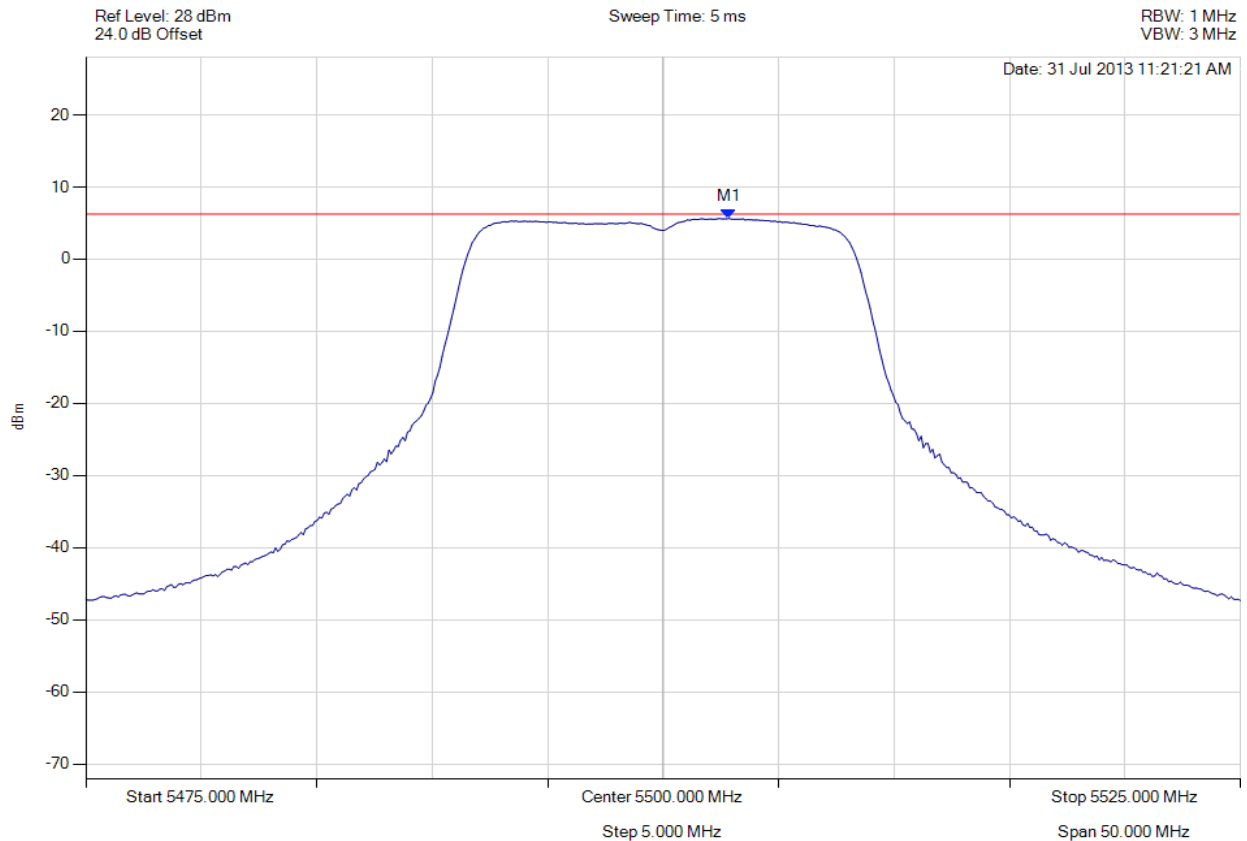

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5502.856 MHz : 5.638 dBm	Limit: ≤ 6.229 dBm Margin: -0.59 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 148 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5580.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

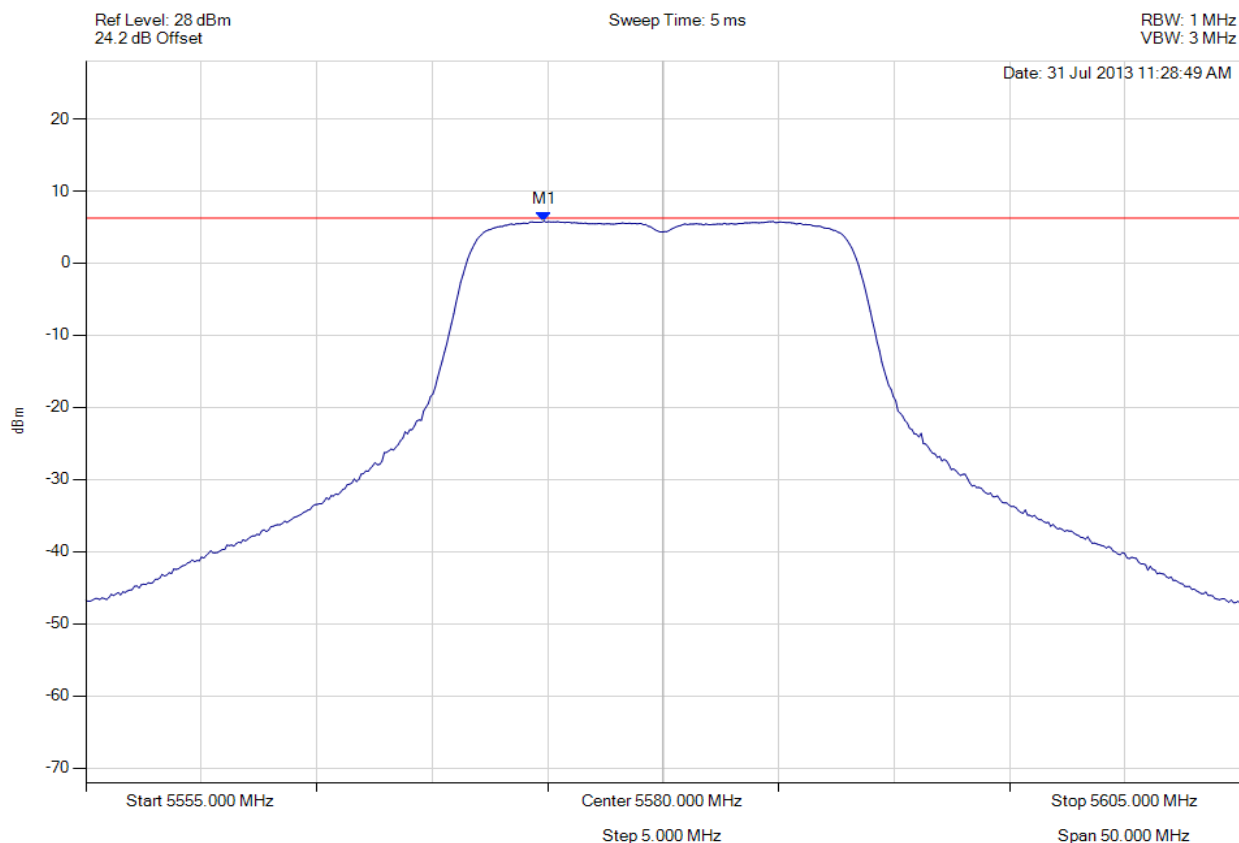

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5574.840 MHz : 5.829 dBm	Limit: ≤ 6.229 dBm Margin: -0.40 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 149 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5580.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

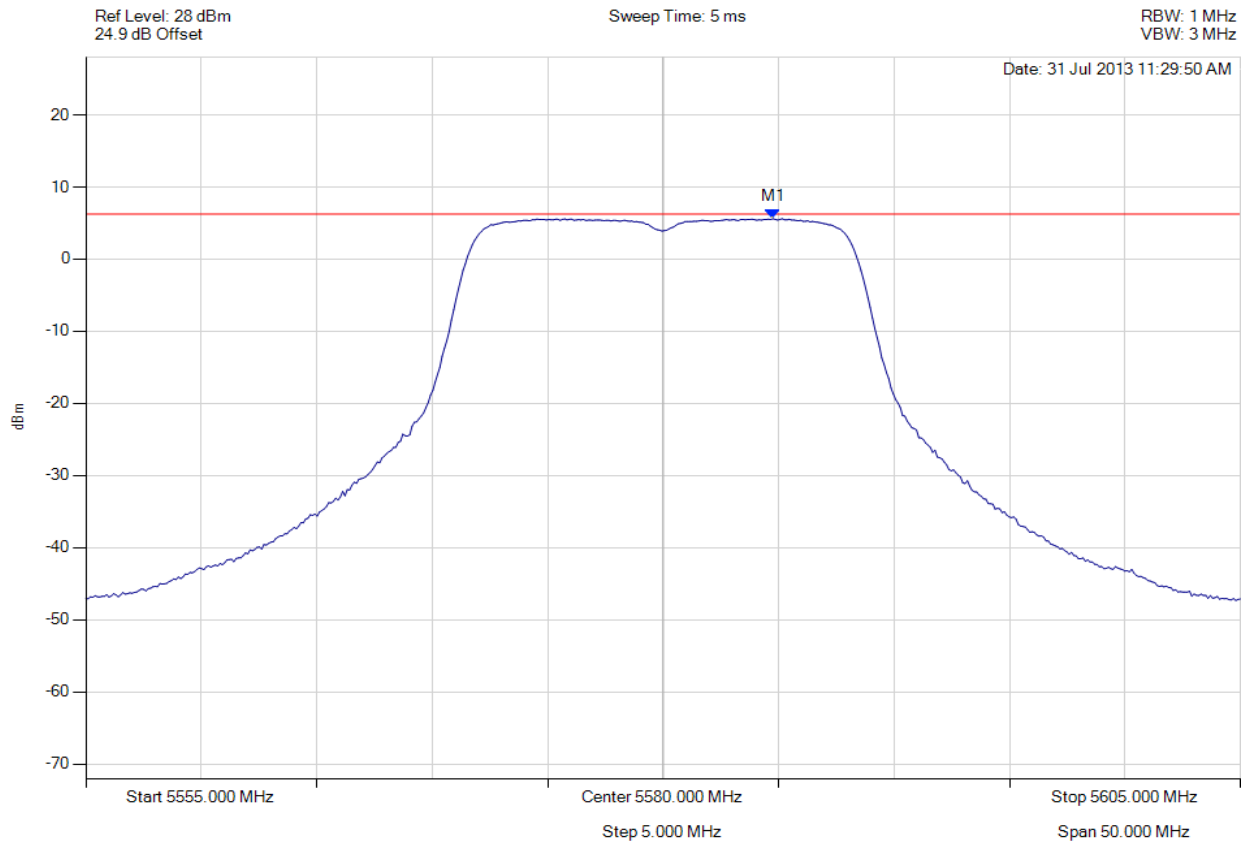

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5584.760 MHz : 5.610 dBm	Limit: ≤ 6.229 dBm Margin: -0.62 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 150 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5580.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

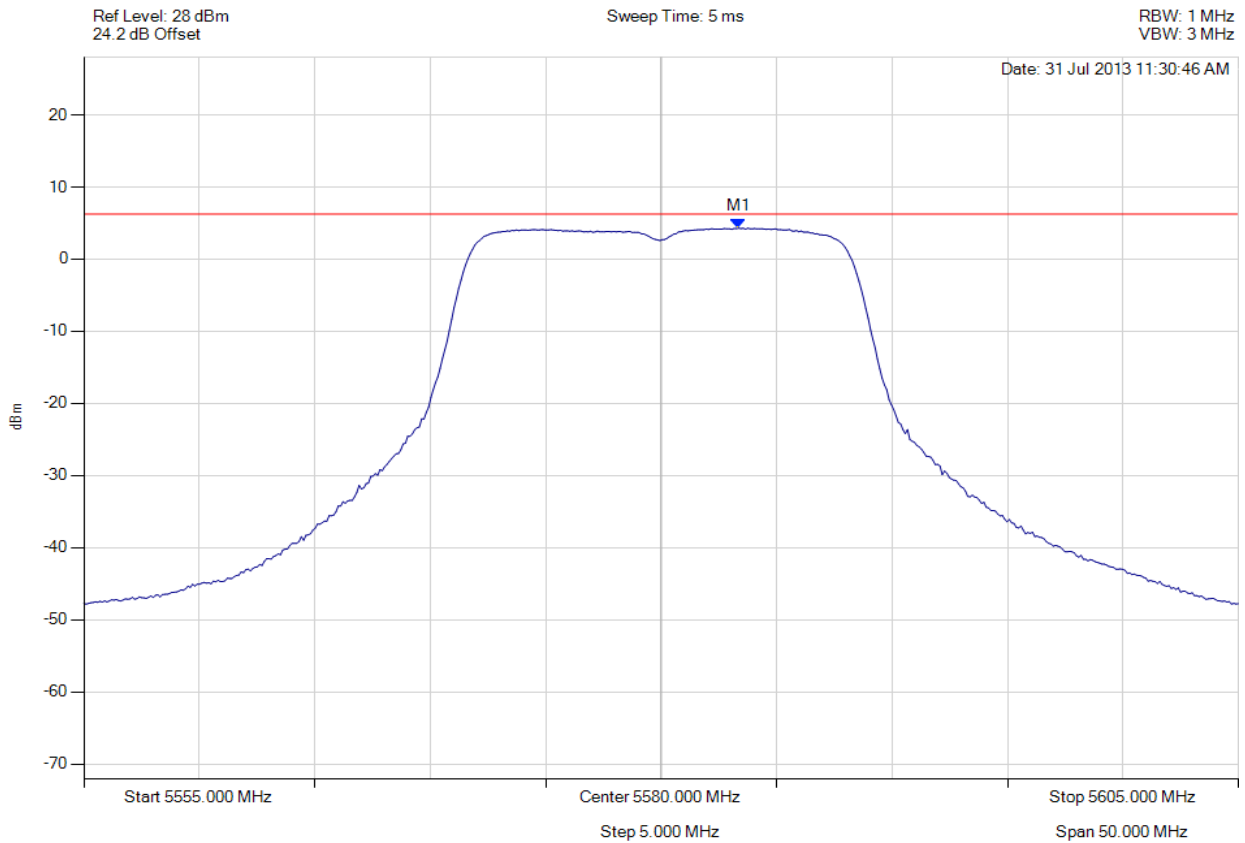

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5583.357 MHz : 4.295 dBm	Limit: ≤ 6.229 dBm Margin: -1.93 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 151 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5700.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

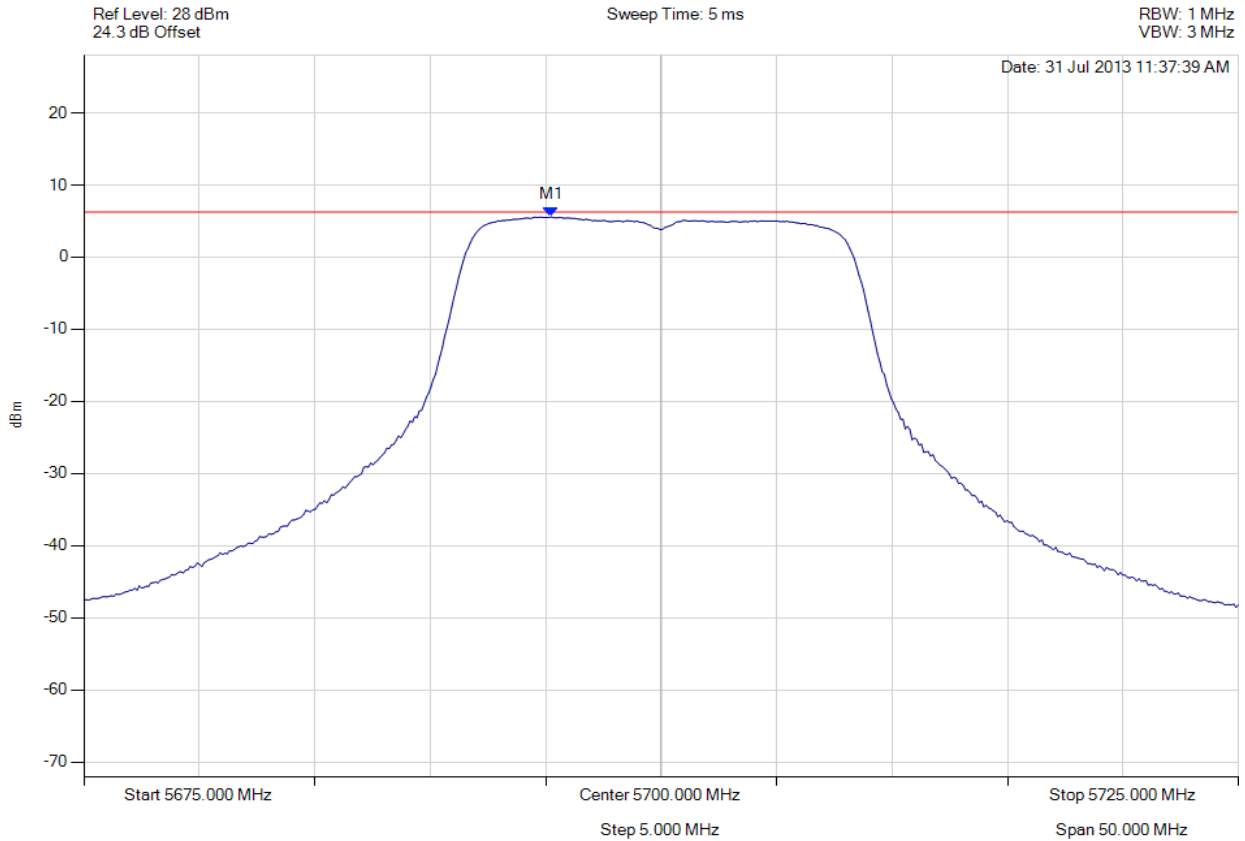

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5695.240 MHz : 5.584 dBm	Limit: ≤ 6.229 dBm Margin: -0.65 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 152 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5700.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

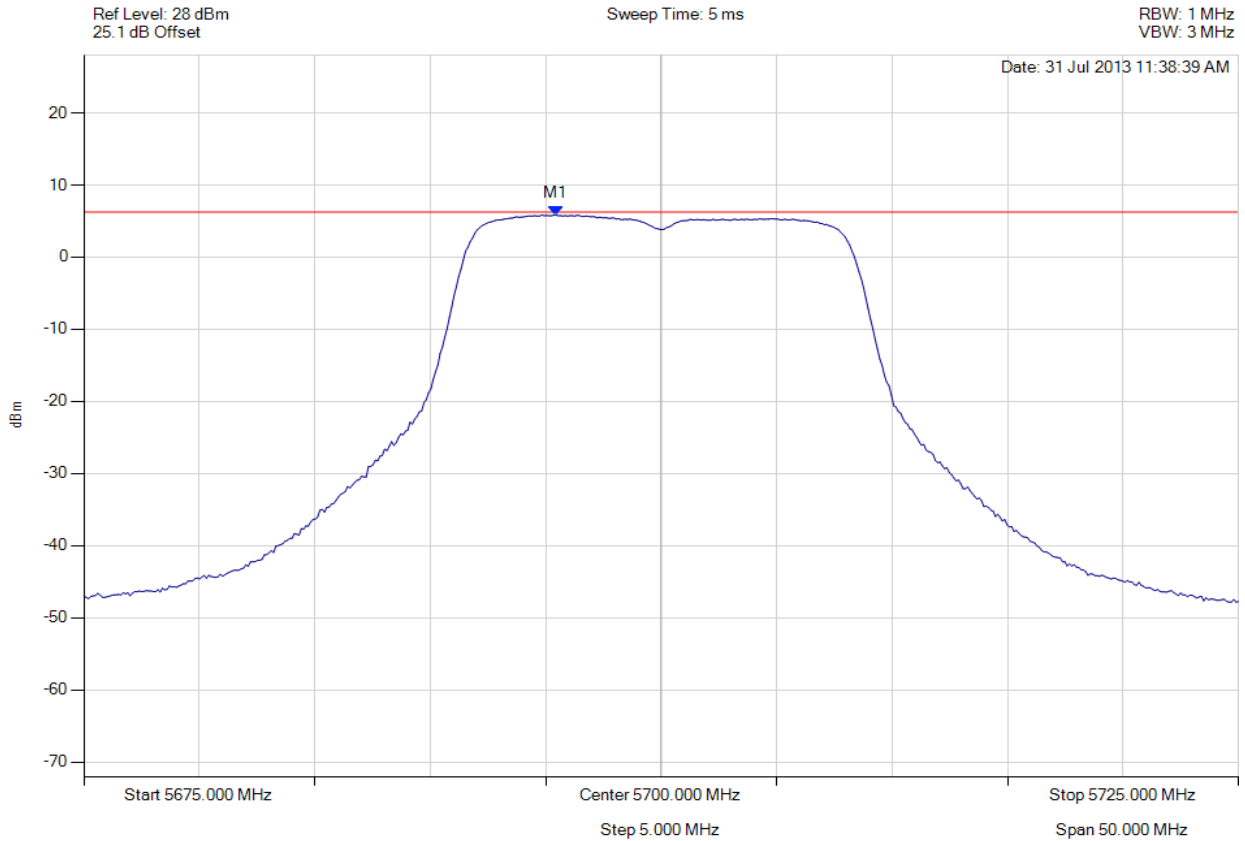

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5695.441 MHz : 5.854 dBm	Limit: ≤ 6.229 dBm Margin: -0.38 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 153 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5700.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

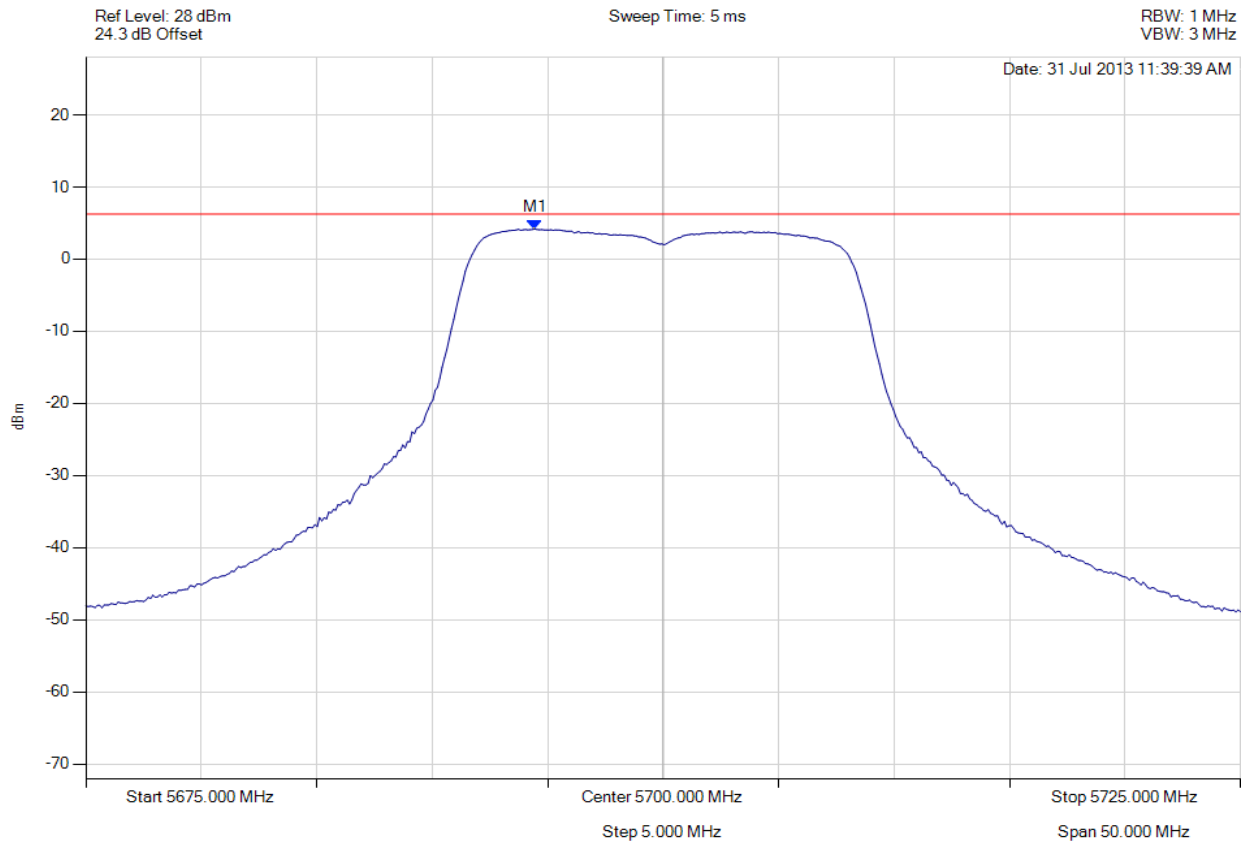

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5694.439 MHz : 4.180 dBm	Limit: ≤ 6.229 dBm Margin: -2.05 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 154 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

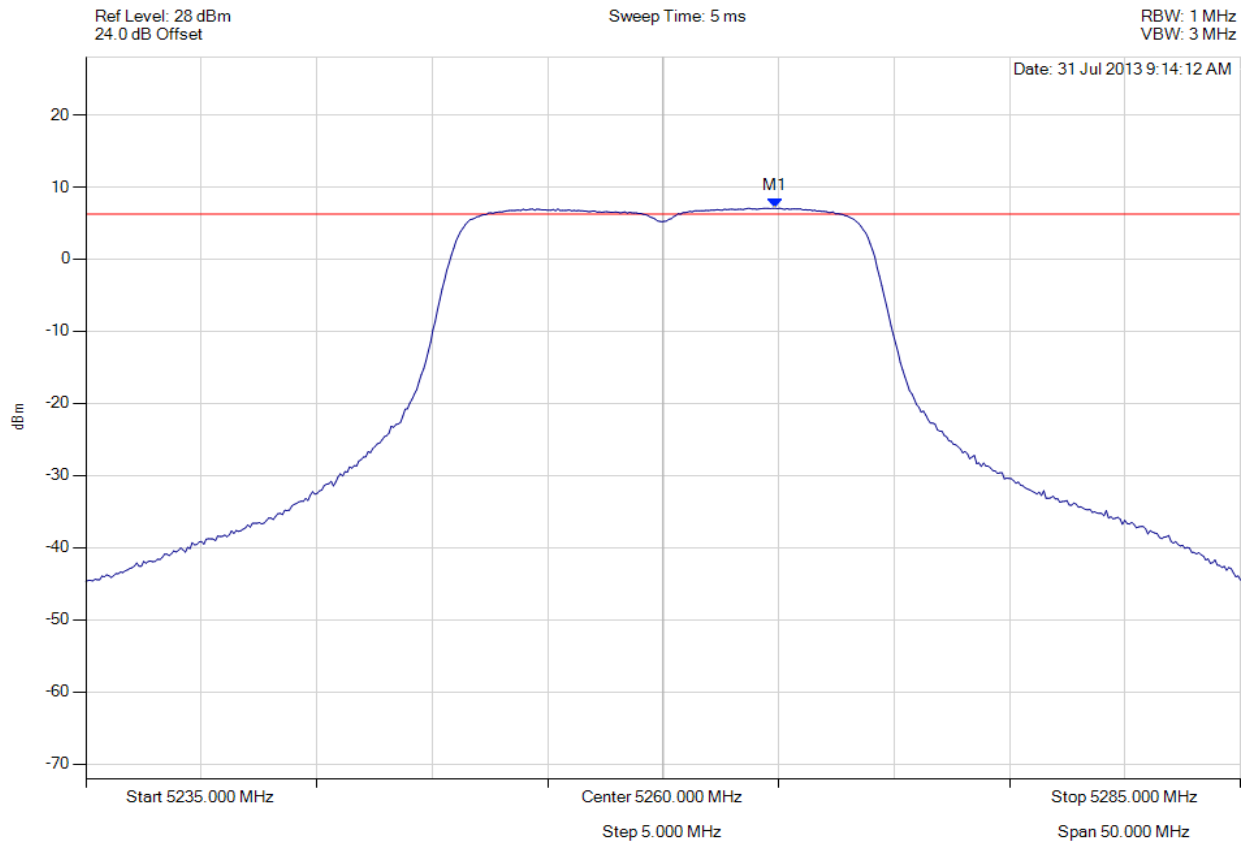

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5264.860 MHz : 7.065 dBm	Limit: ≤ 6.229 dBm Margin: 0.84 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 155 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

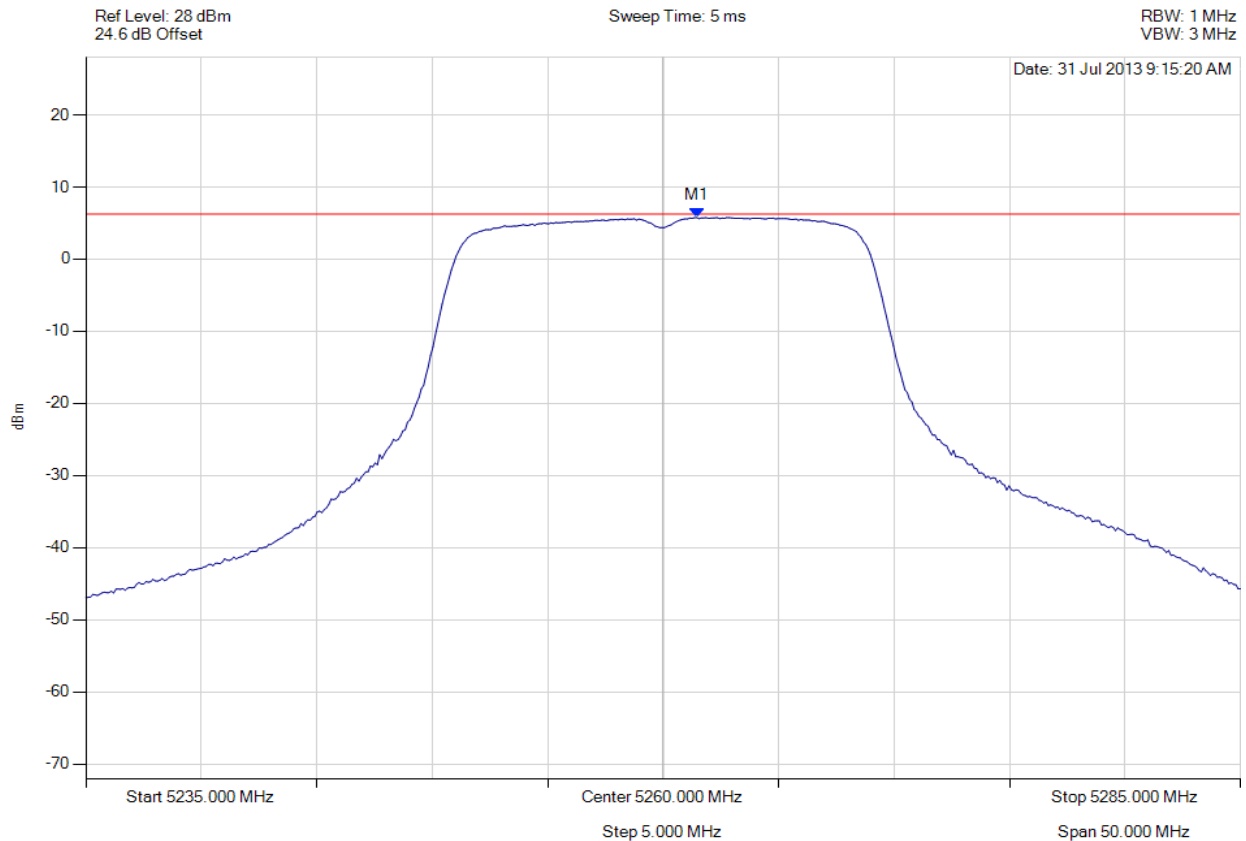

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5261.453 MHz : 5.773 dBm	Limit: ≤ 6.229 dBm Margin: -0.46 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 156 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

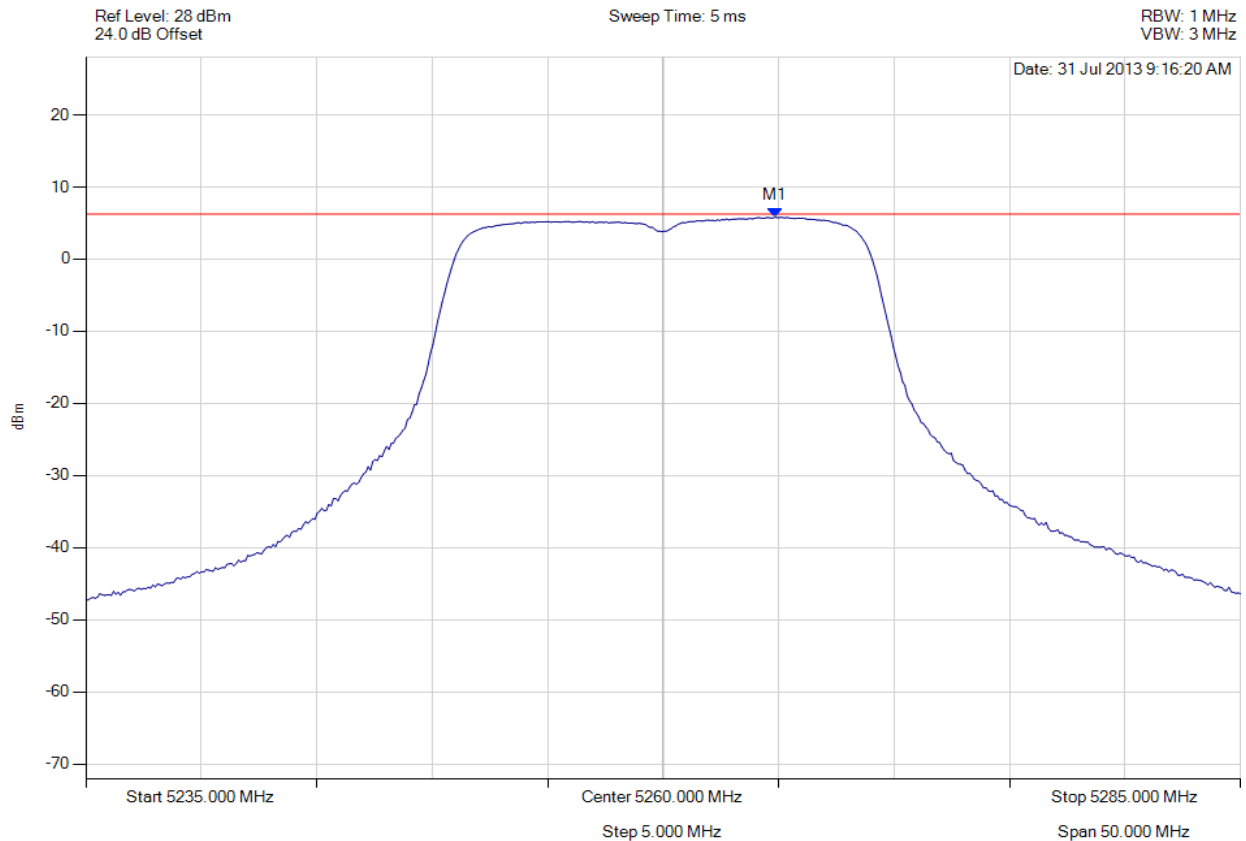

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5264.860 MHz : 5.835 dBm	Limit: ≤ 6.229 dBm Margin: -0.39 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 157 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

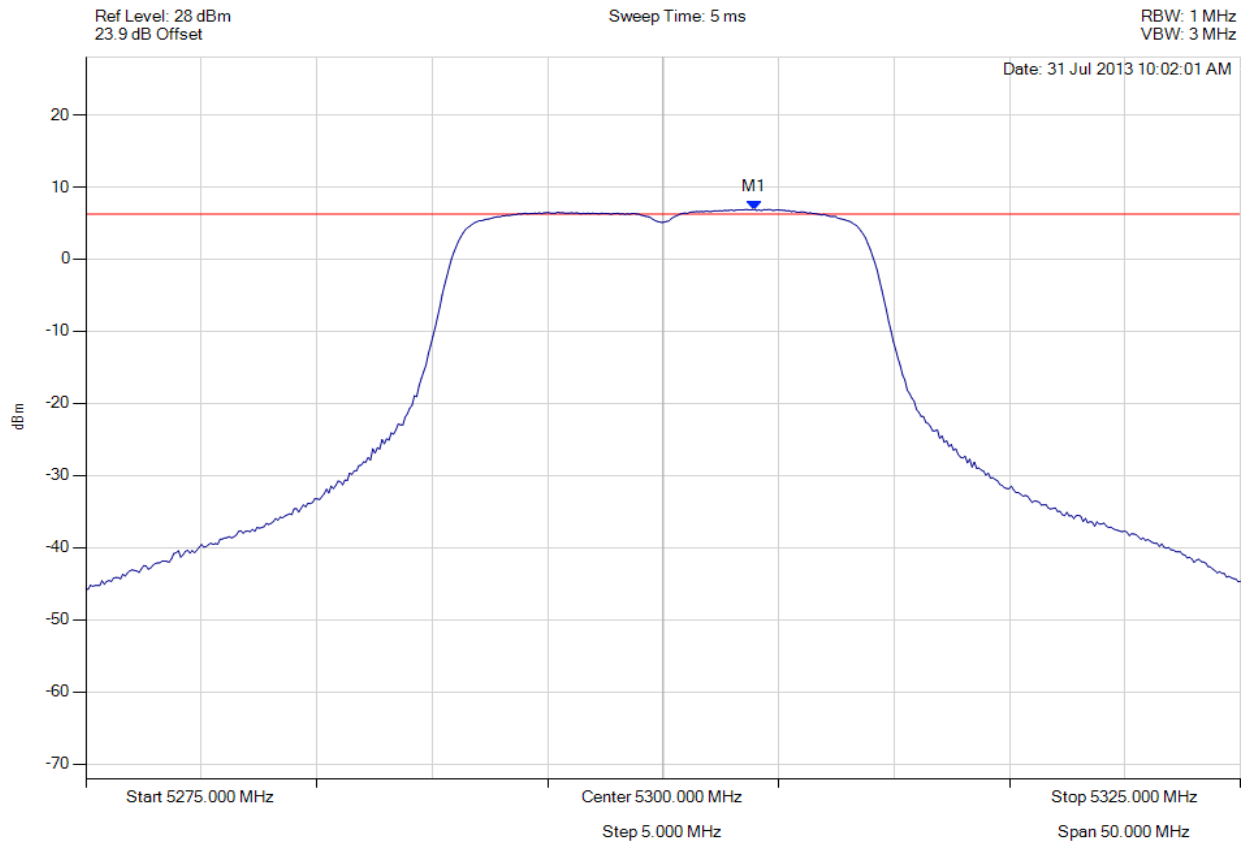

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5303.958 MHz : 6.885 dBm	Limit: ≤ 6.229 dBm Margin: 0.66 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 158 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

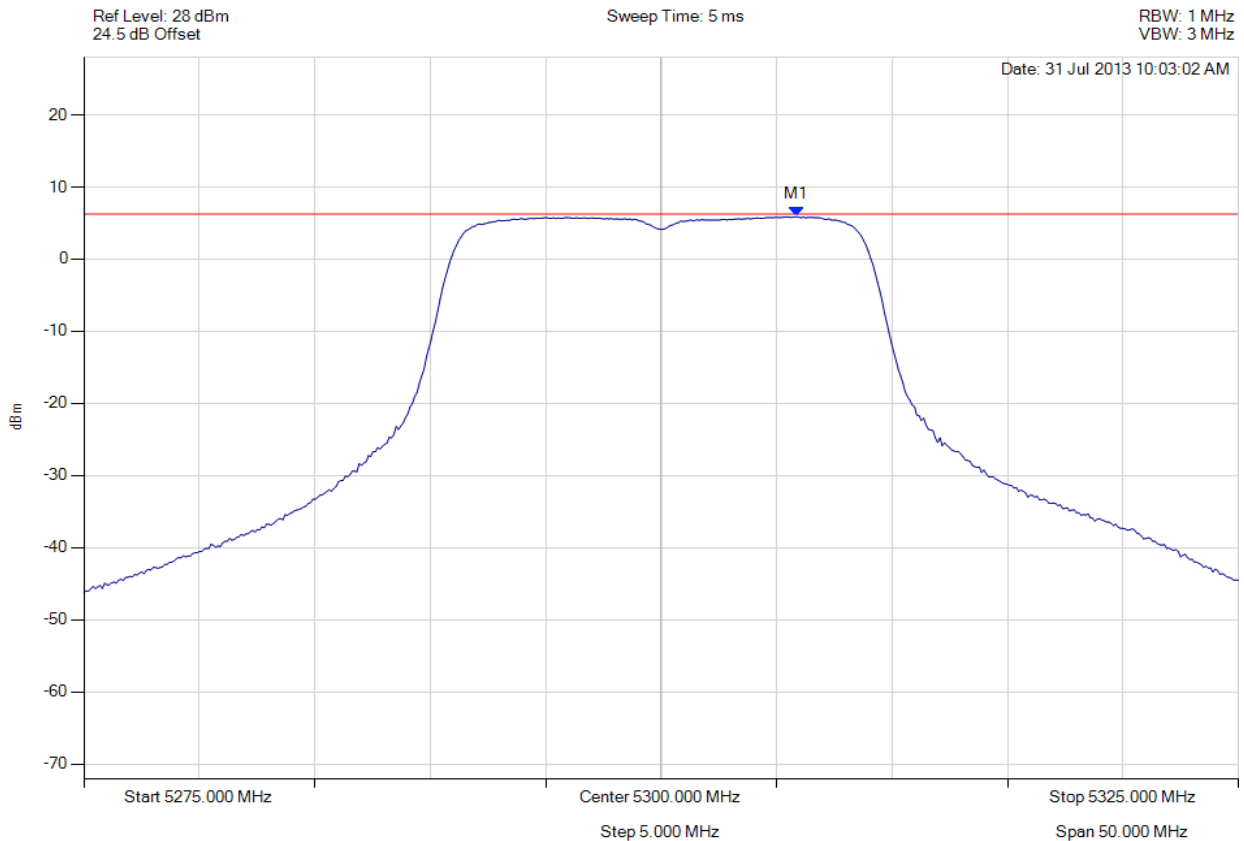

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5305.862 MHz : 5.898 dBm	Limit: ≤ 6.229 dBm Margin: -0.33 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 159 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

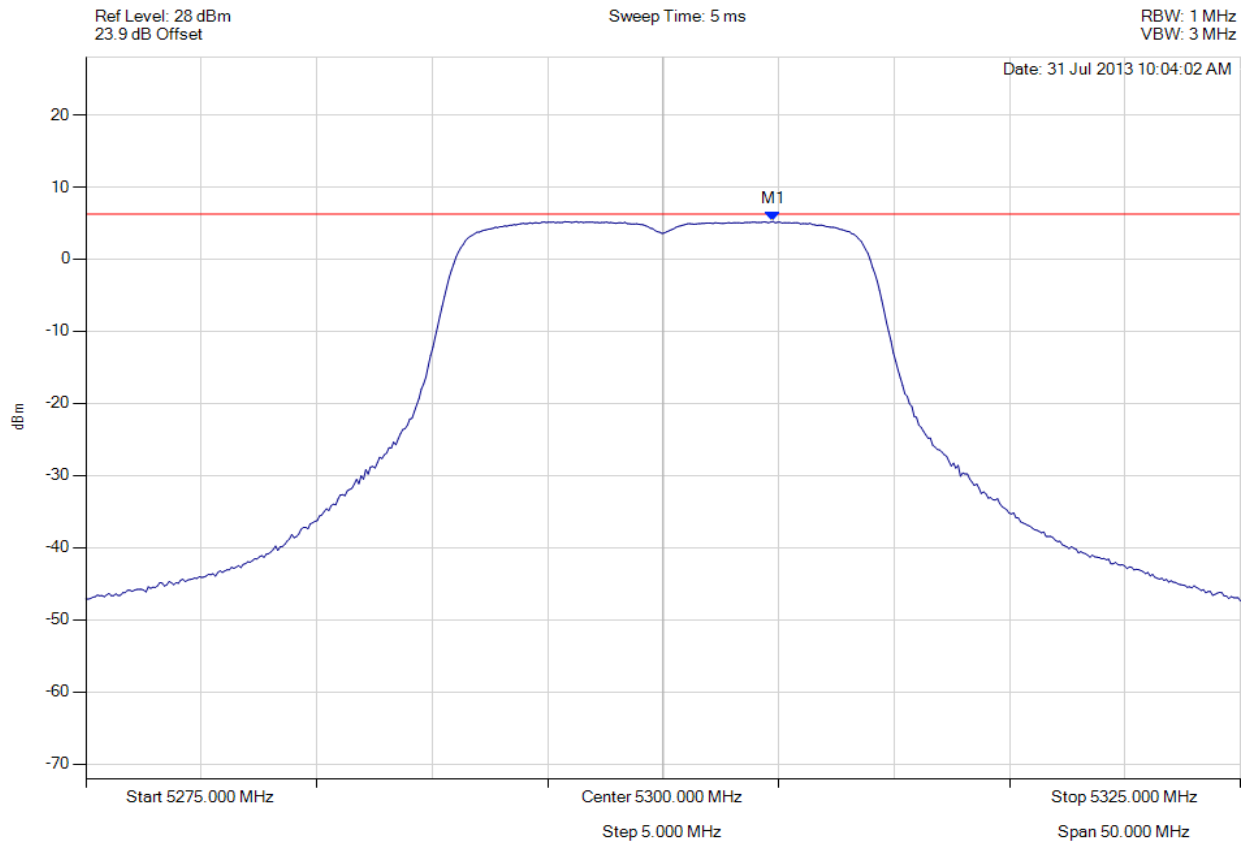

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5304.760 MHz : 5.225 dBm	Limit: ≤ 6.229 dBm Margin: -1.00 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 160 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

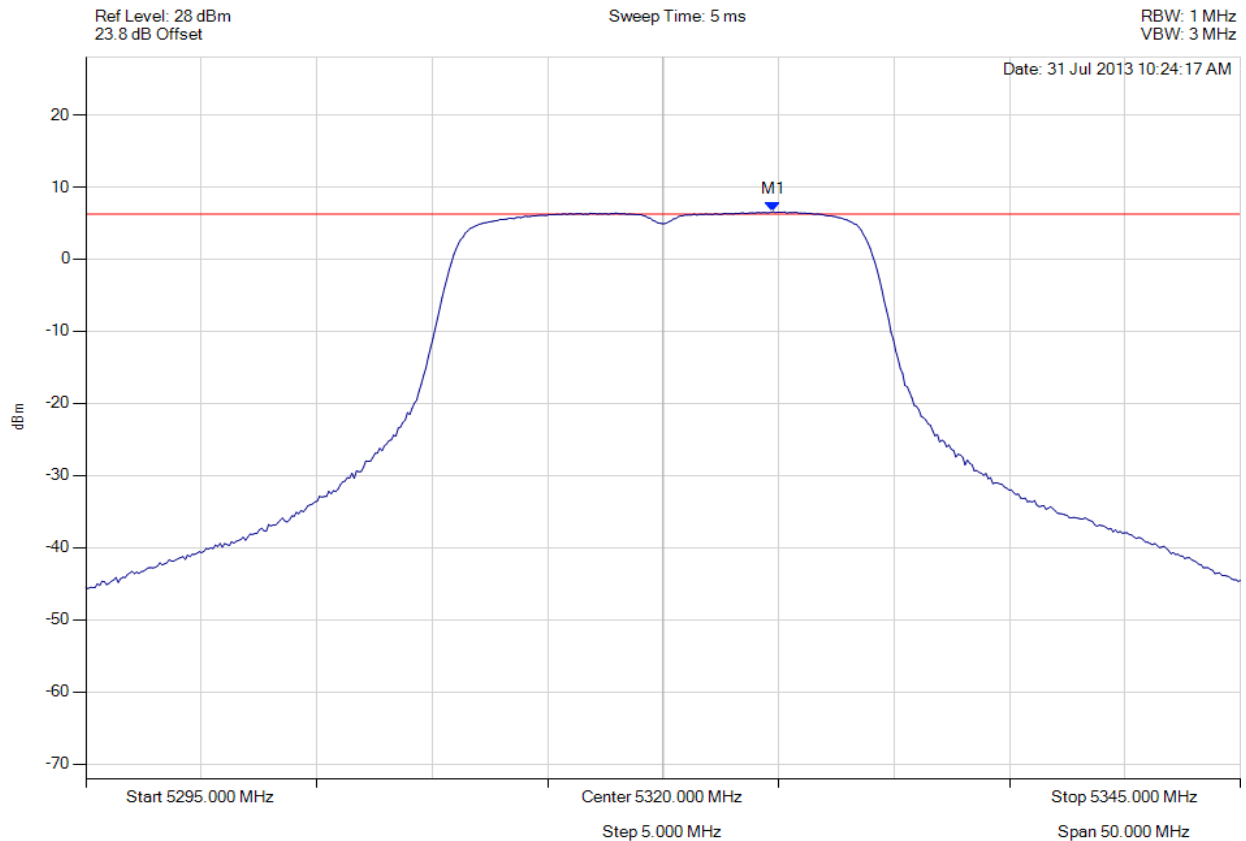

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5324.760 MHz : 6.573 dBm	Limit: ≤ 6.229 dBm Margin: 0.34 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 161 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

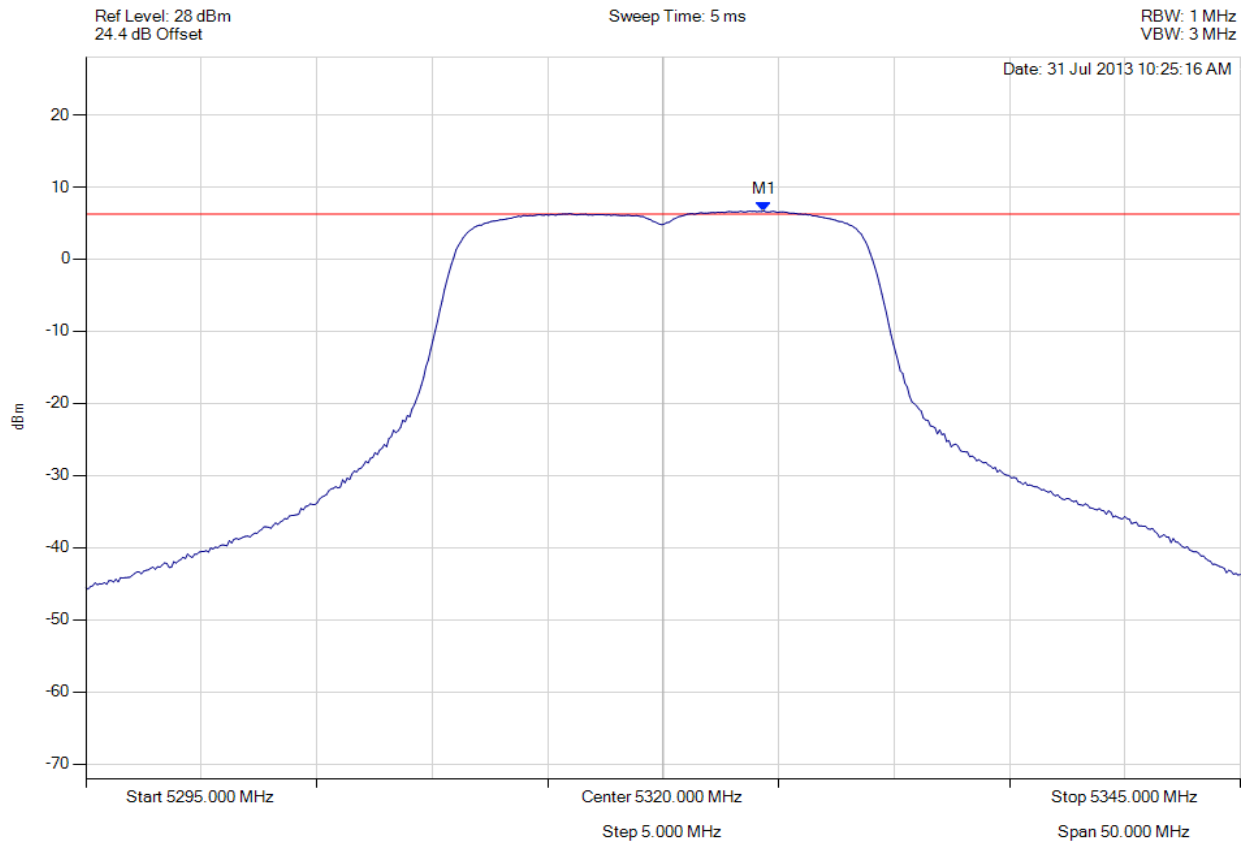

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5324.359 MHz : 6.677 dBm	Limit: ≤ 6.229 dBm Margin: 0.45 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 162 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

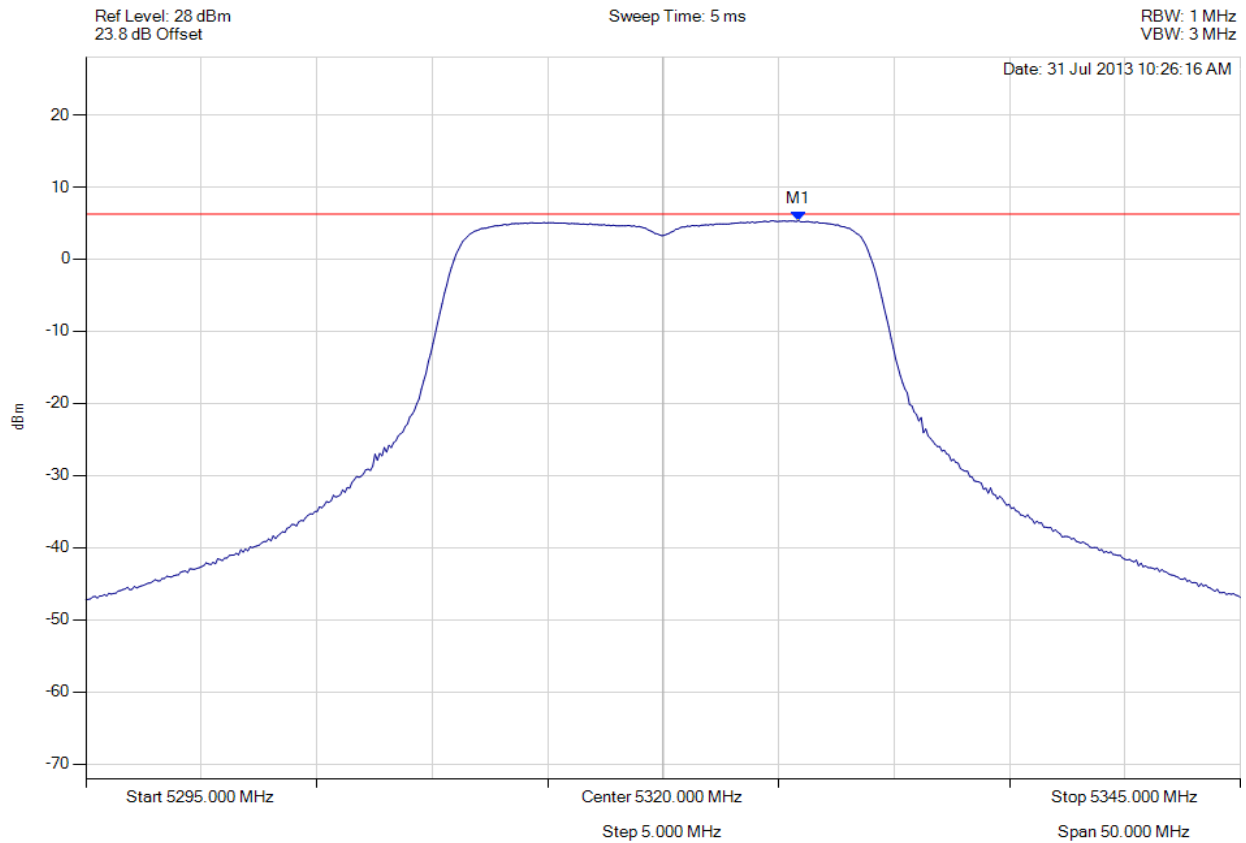

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5325.862 MHz : 5.333 dBm	Limit: ≤ 6.229 dBm Margin: -0.90 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 163 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

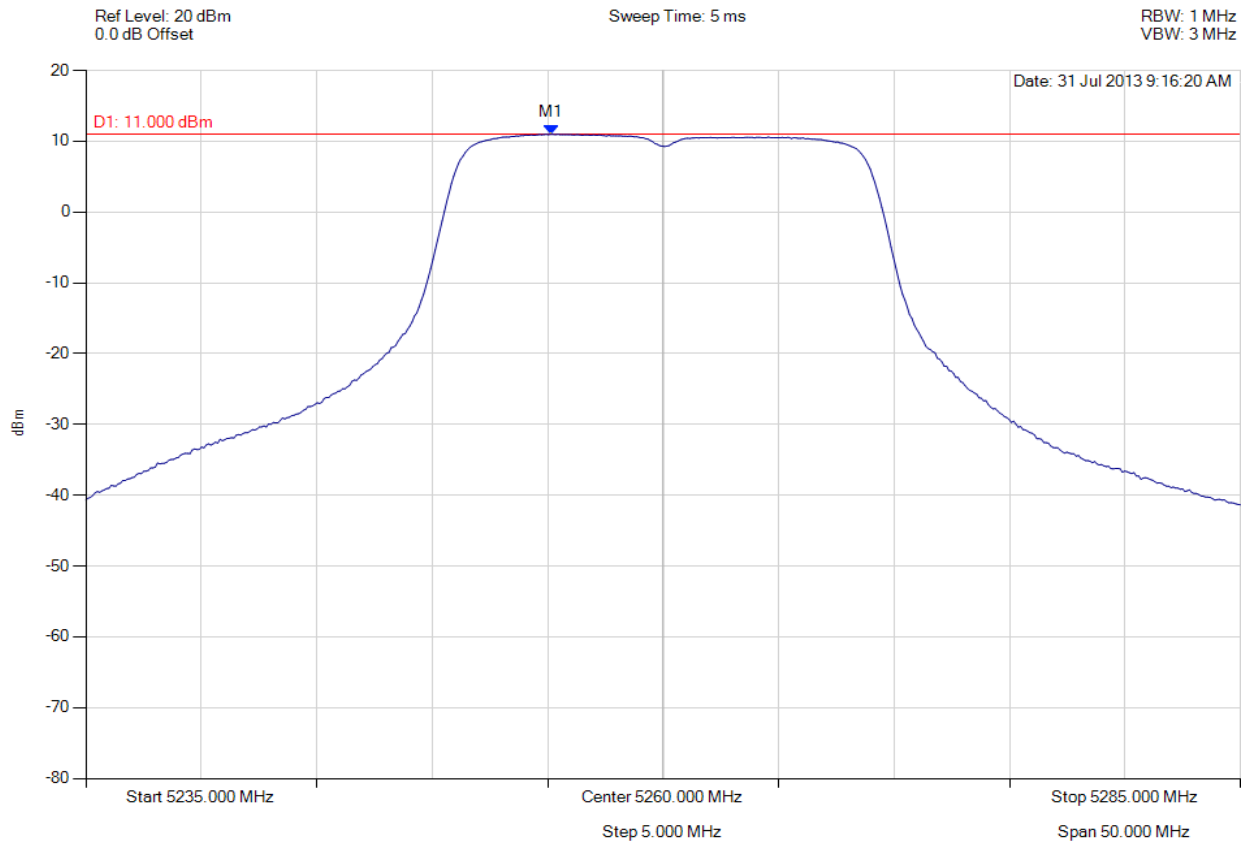

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 5255.140 MHz : 10.984 dBm	Limit: ≤ 11.0 dBm Margin: -0.016 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 164 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

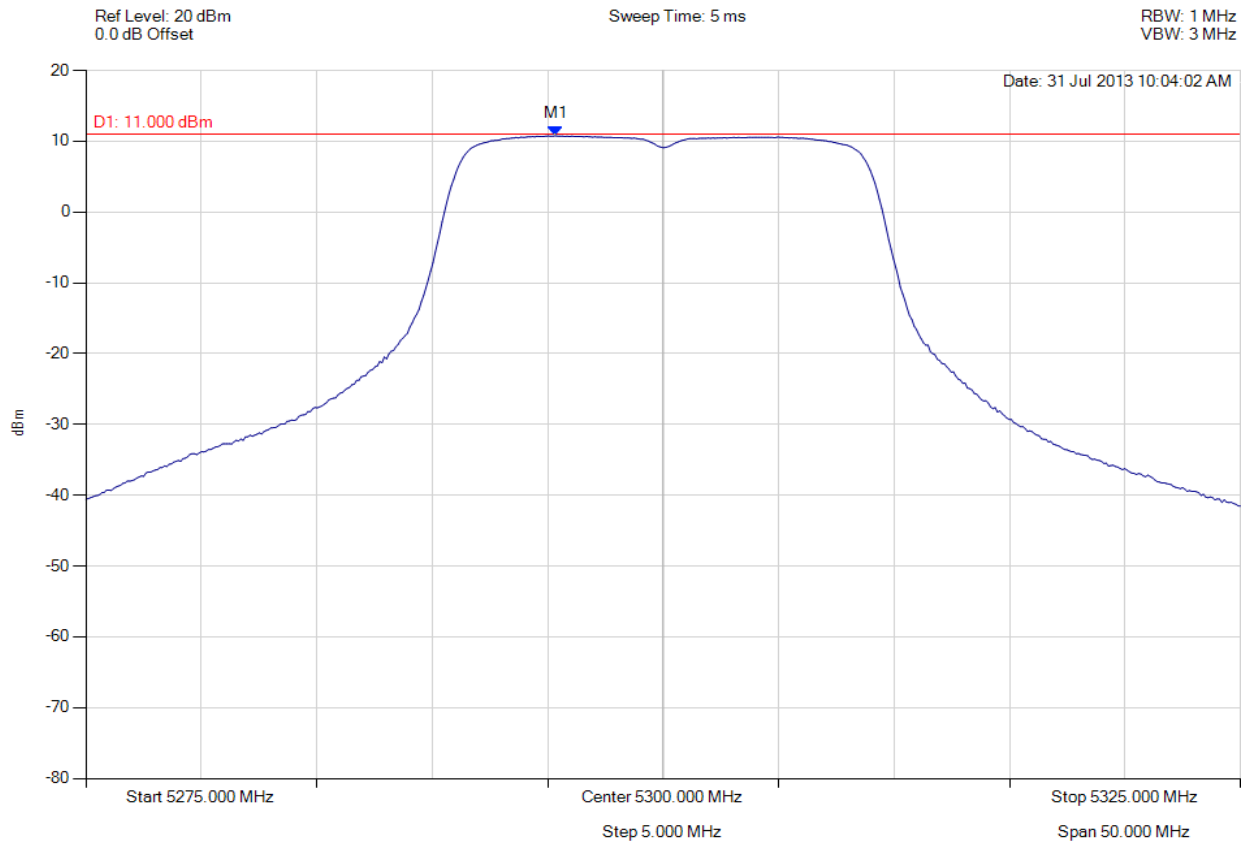

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 5295.341 MHz : 10.757 dBm	Limit: ≤ 11.0 dBm Margin: -0.243 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 165 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

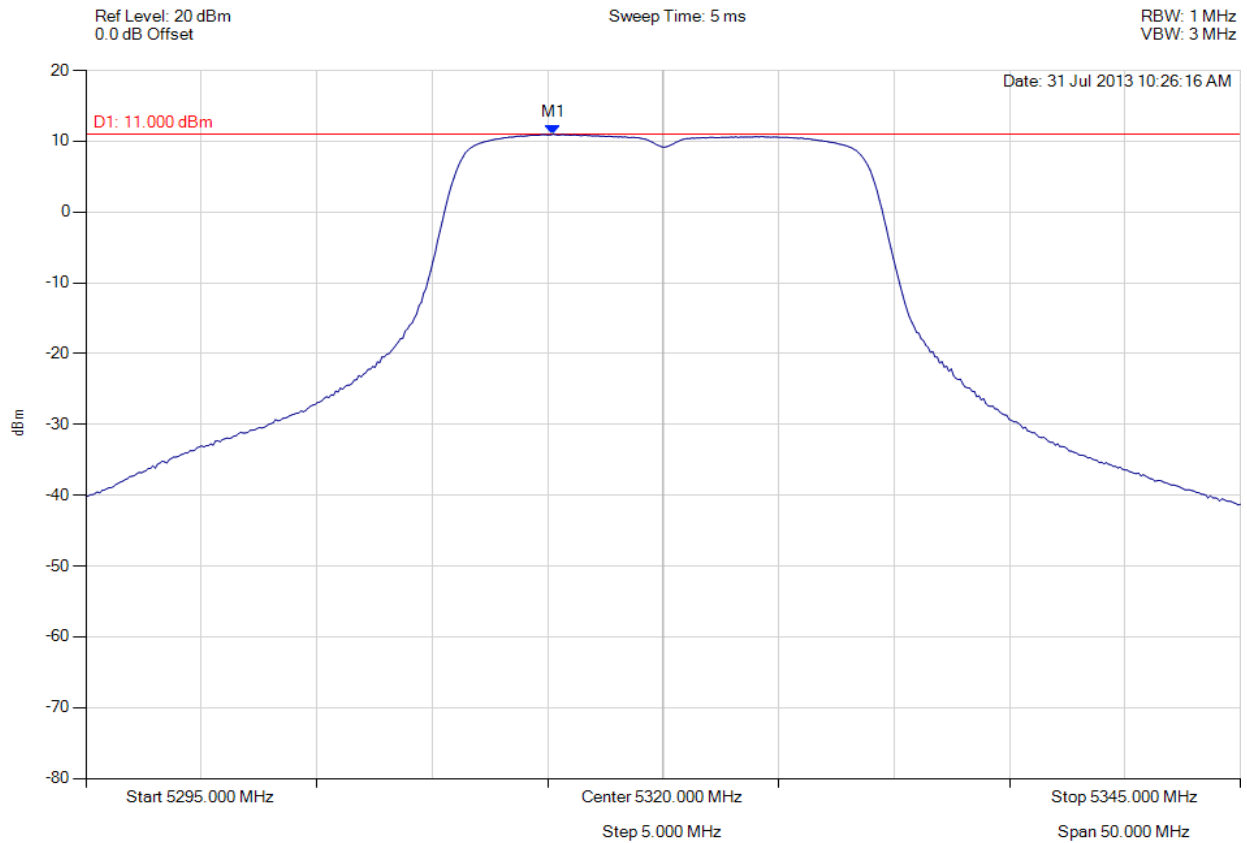

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 5315.240 MHz : 10.992 dBm	Limit: ≤ 11.0 dBm Margin: -0.008 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 166 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

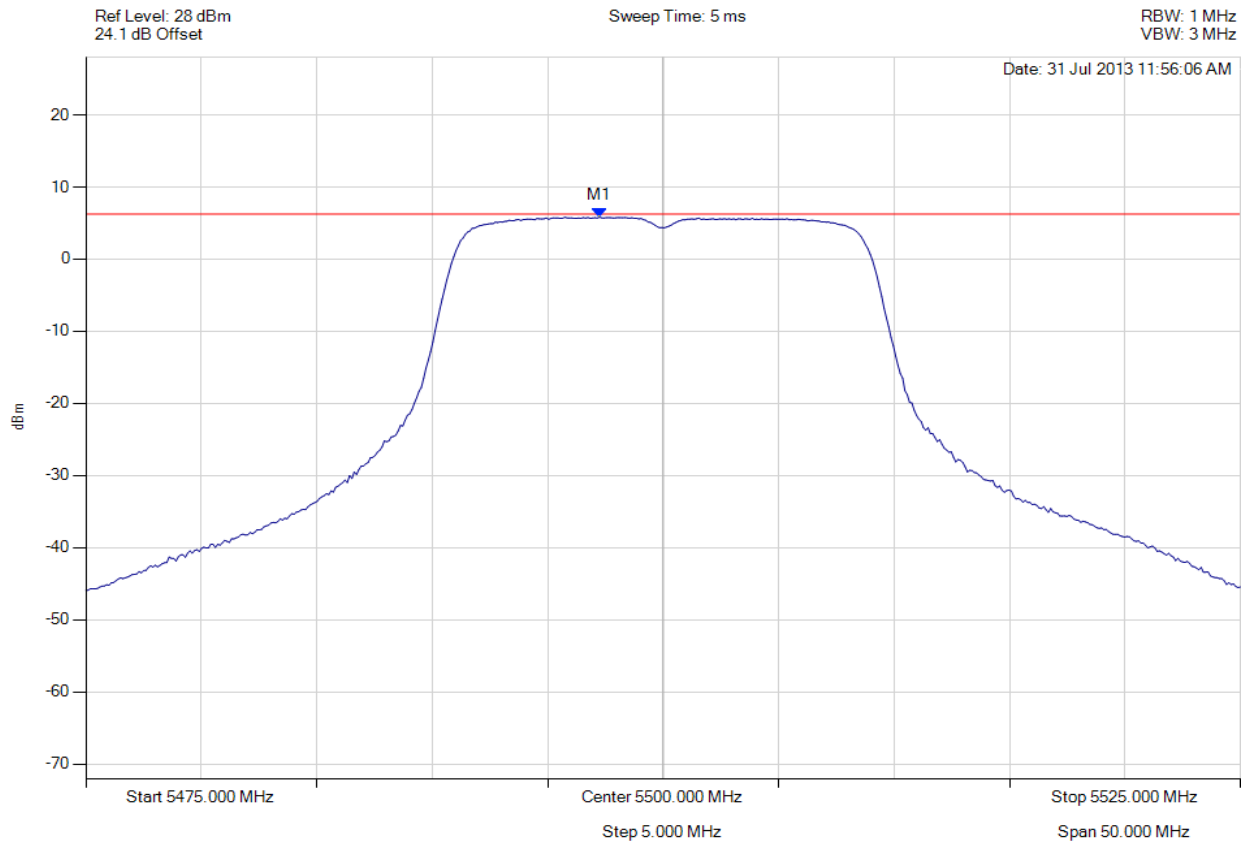

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5497.244 MHz : 5.810 dBm	Limit: ≤ 6.229 dBm Margin: -0.42 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 167 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

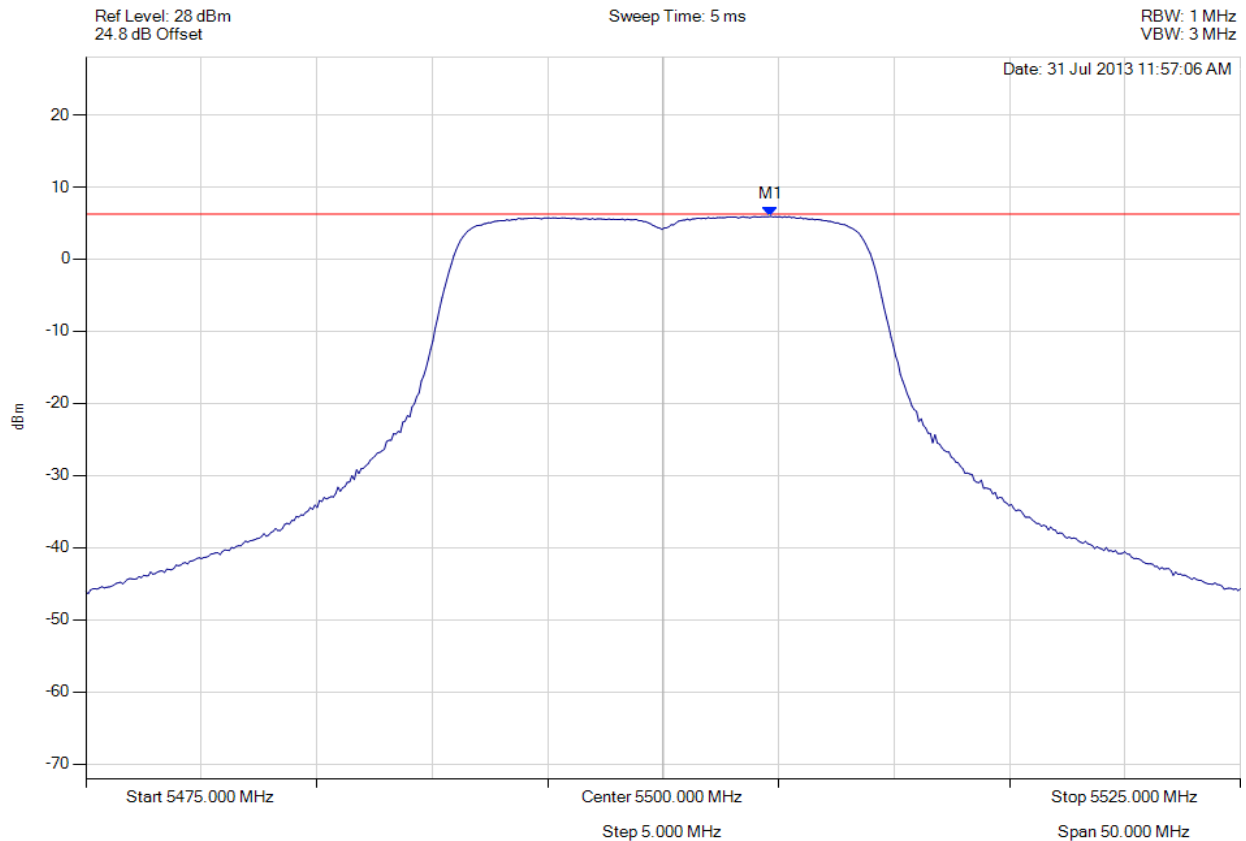

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5504.659 MHz : 5.941 dBm	Limit: ≤ 6.229 dBm Margin: -0.29 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 168 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

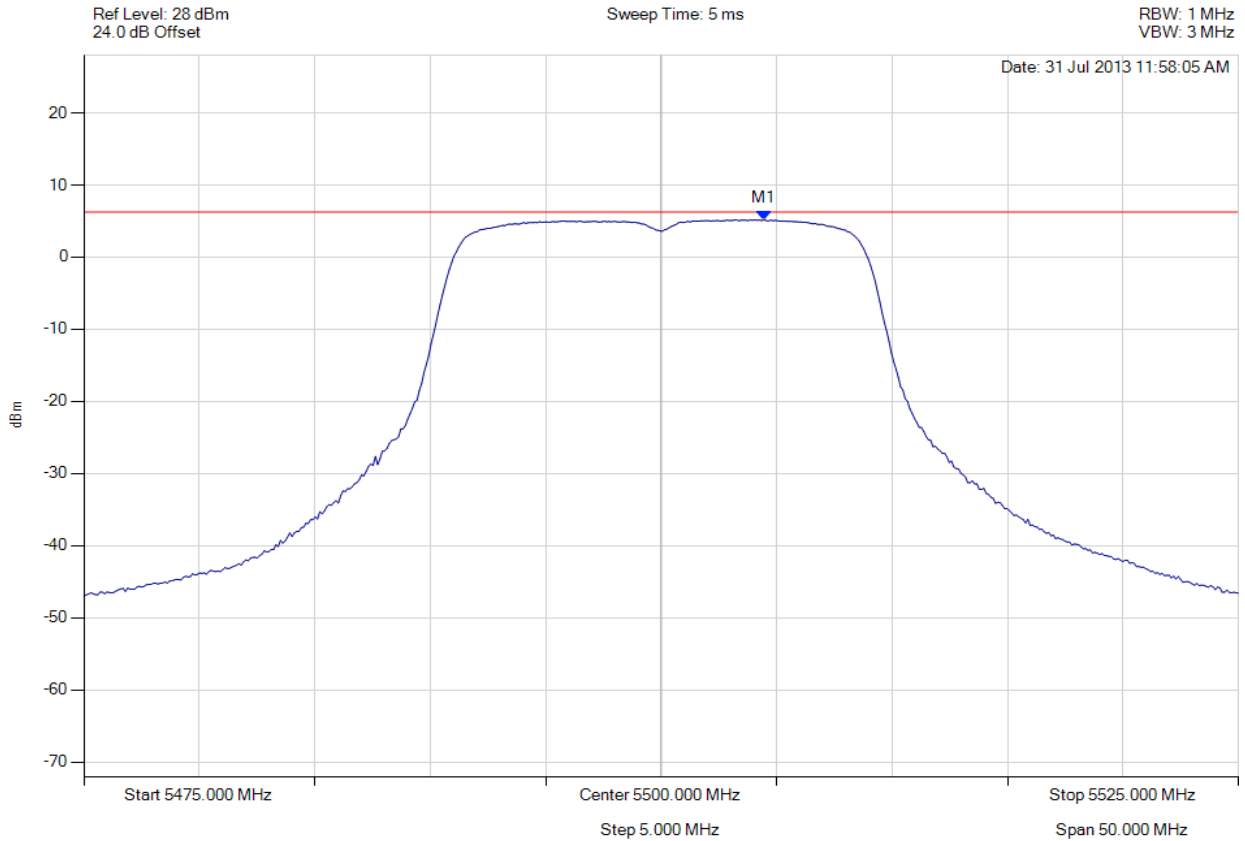

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5504.459 MHz : 5.177 dBm	Limit: ≤ 6.229 dBm Margin: -1.05 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 169 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

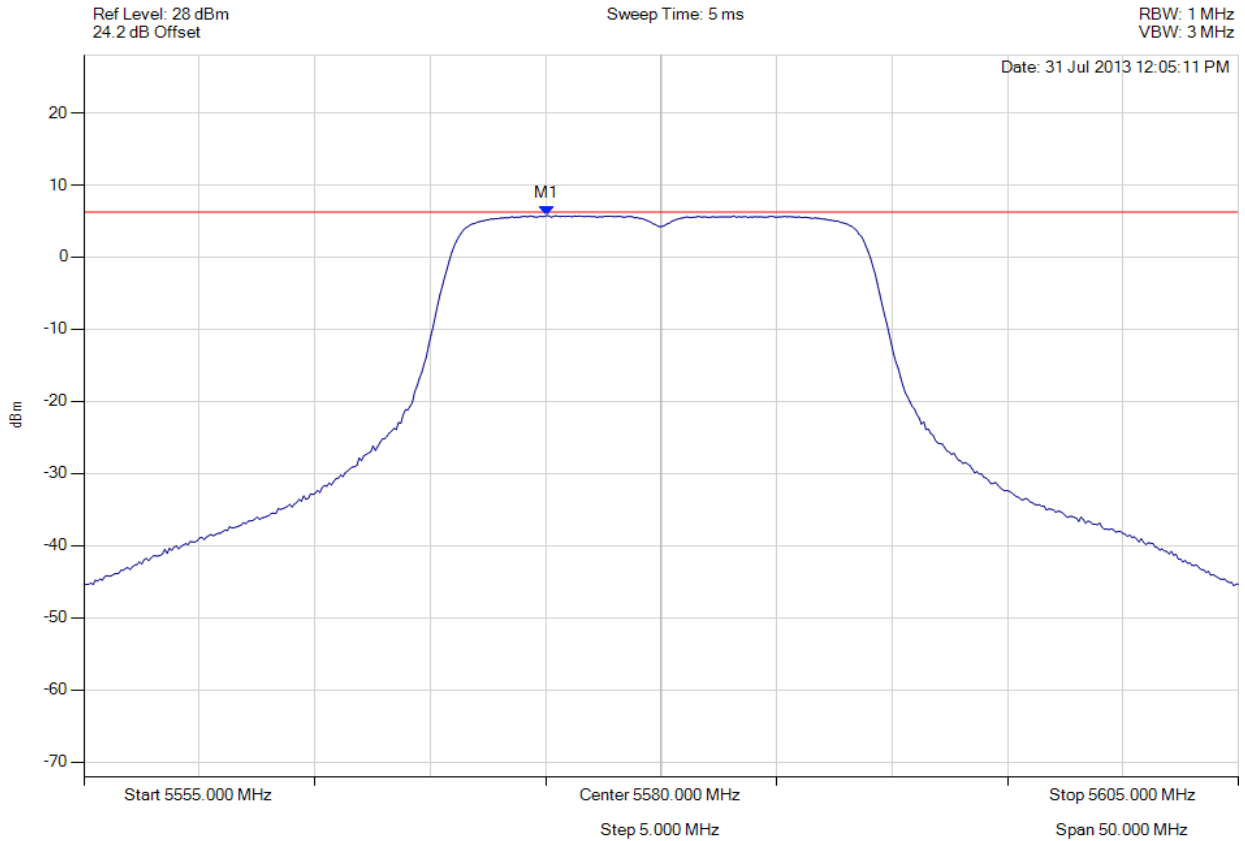

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5575.040 MHz : 5.757 dBm	Limit: ≤ 6.229 dBm Margin: -0.47 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 170 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

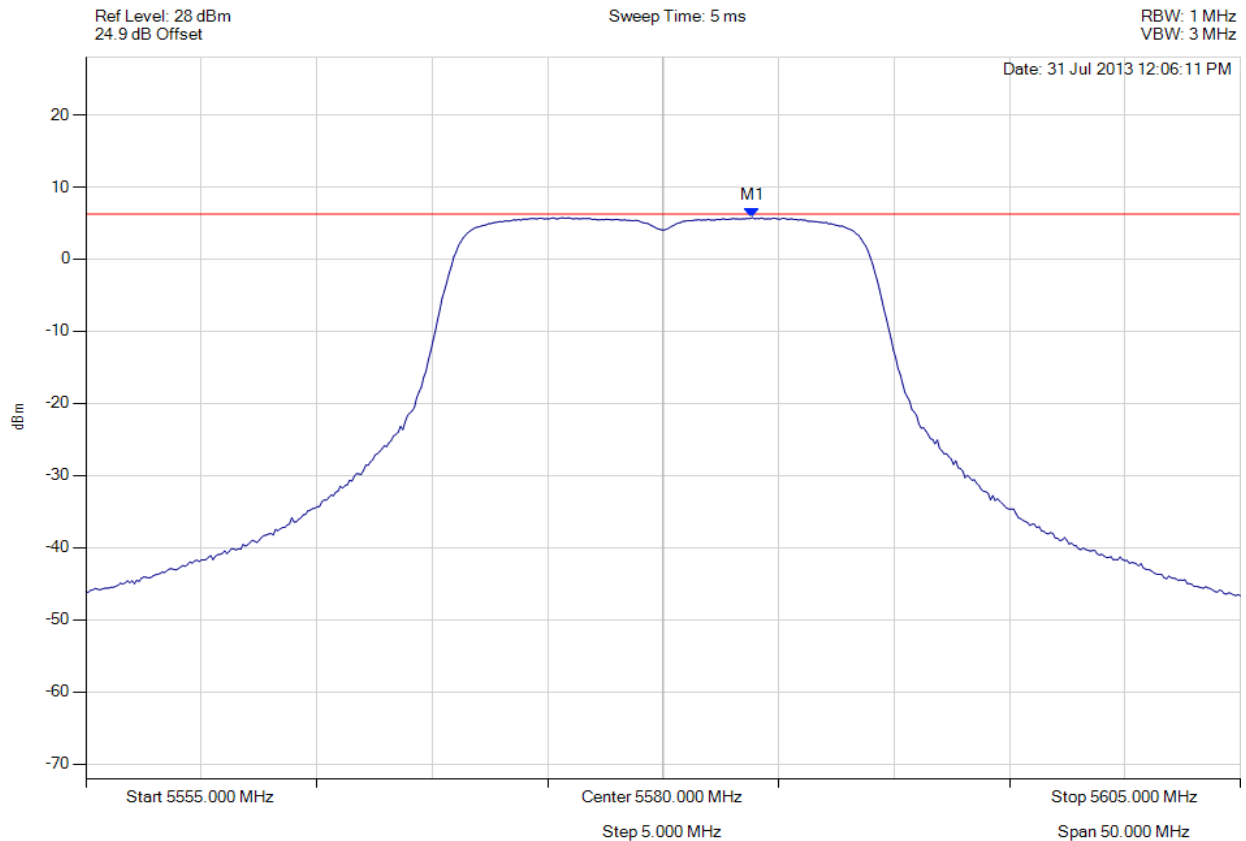

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5583.858 MHz : 5.752 dBm	Limit: ≤ 6.229 dBm Margin: -0.48 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 171 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

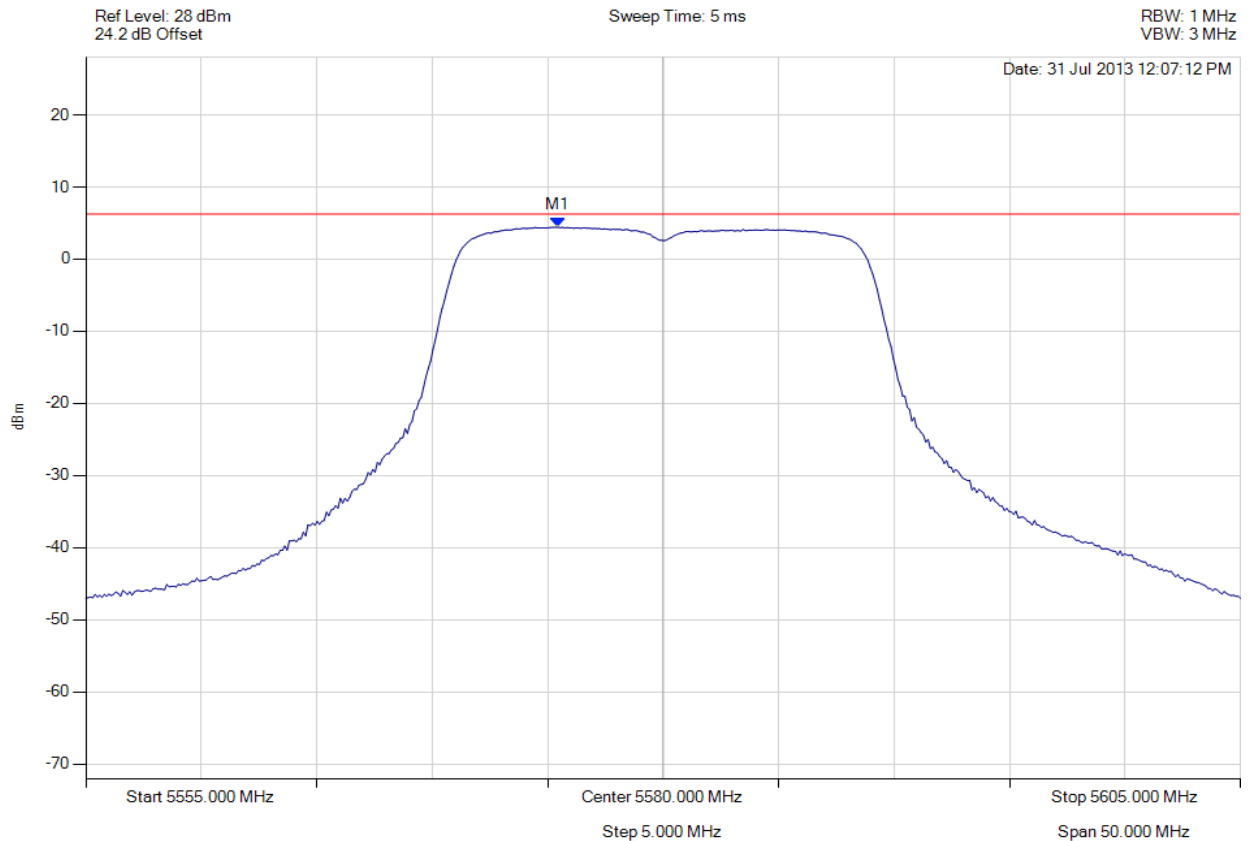

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5575.441 MHz : 4.412 dBm	Limit: ≤ 6.229 dBm Margin: -1.82 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 172 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5700.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

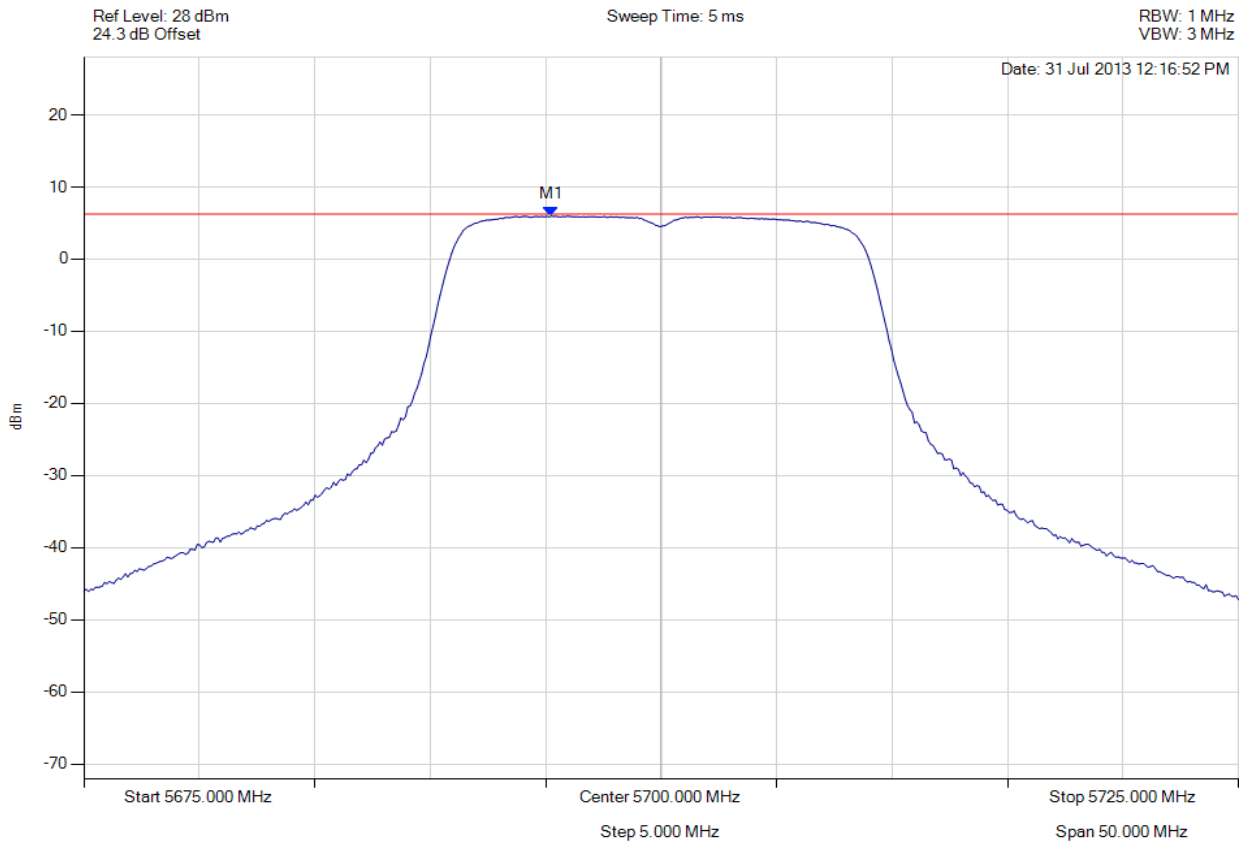

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5695.240 MHz : 5.971 dBm	Limit: ≤ 6.229 dBm Margin: -0.26 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 173 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5700.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

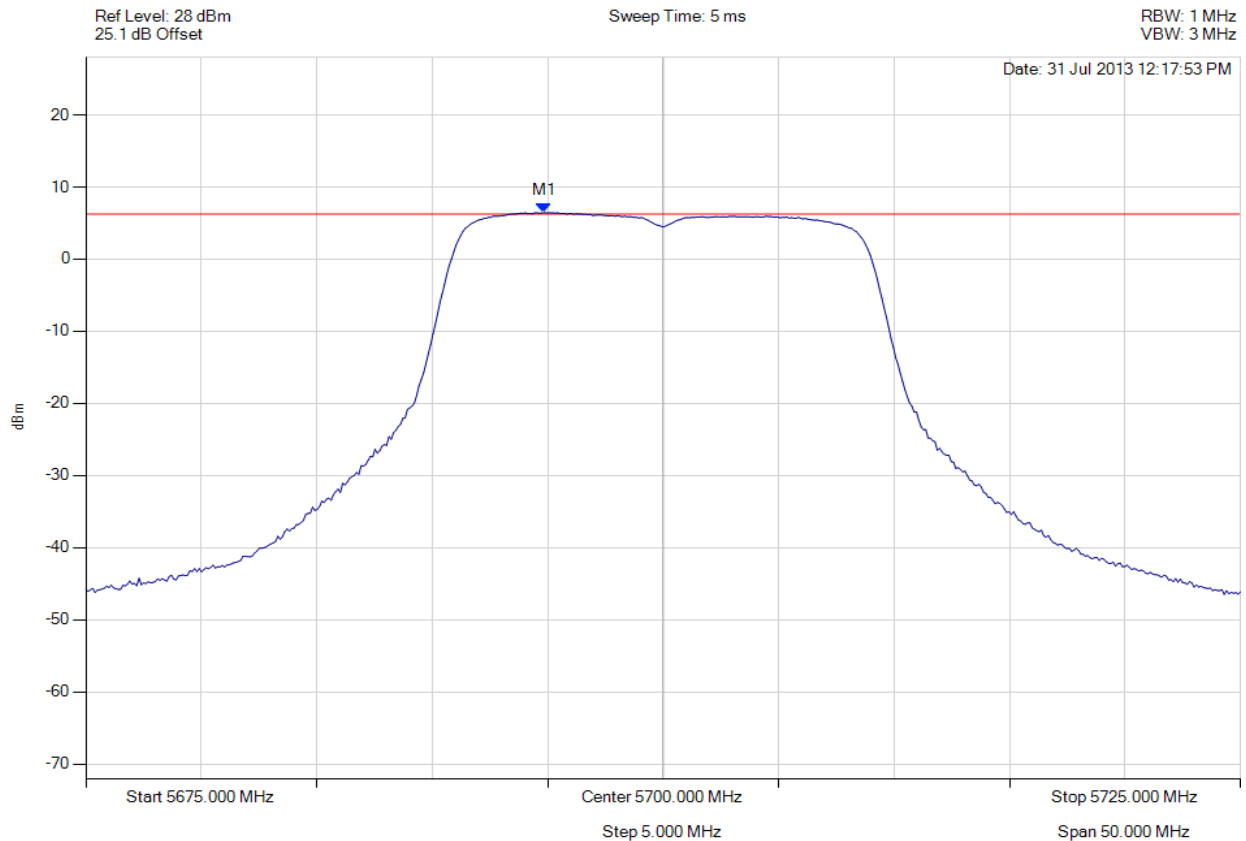

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5694.840 MHz : 6.447 dBm	Limit: ≤ 6.229 dBm Margin: 0.22 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 174 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5700.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

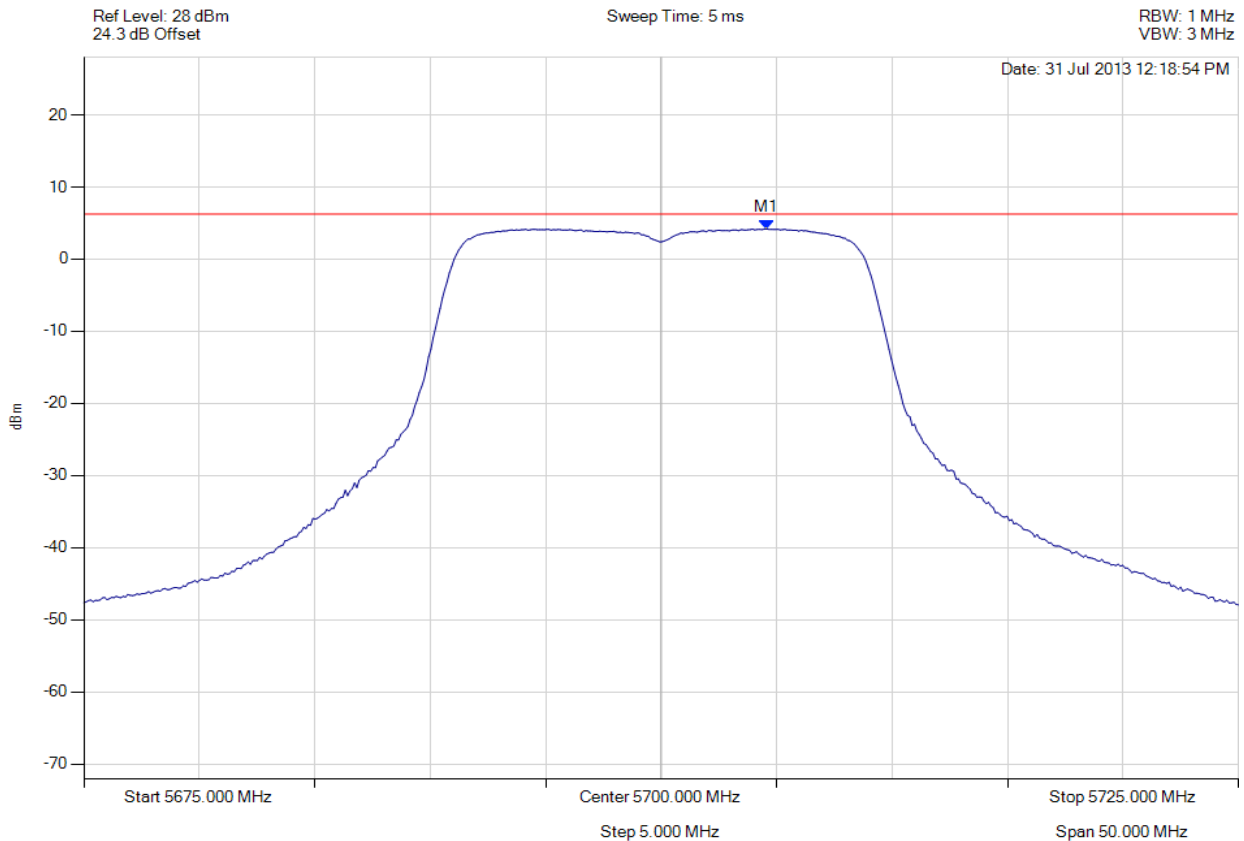

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5704.559 MHz : 4.185 dBm	Limit: ≤ 6.229 dBm Margin: -2.04 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 175 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

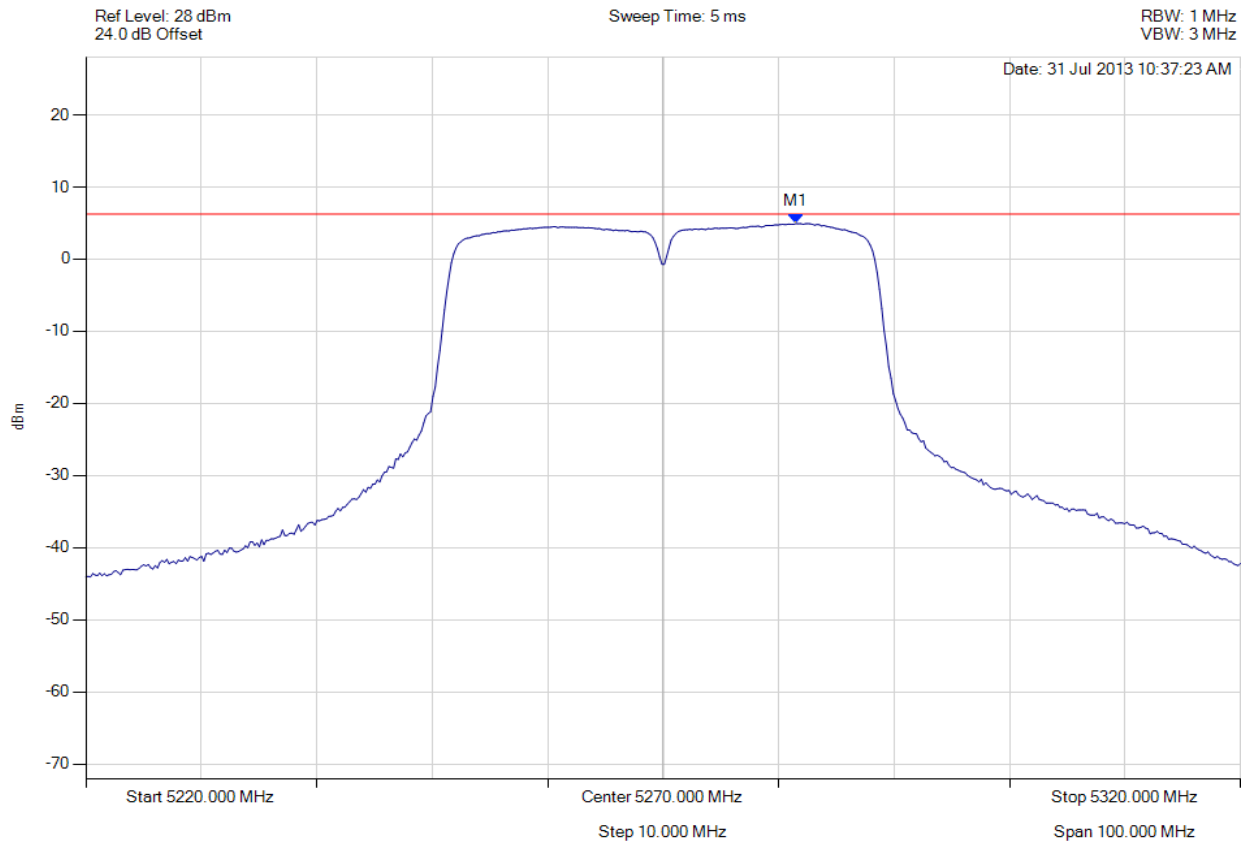

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5281.523 MHz : 4.932 dBm	Limit: ≤ 6.229 dBm Margin: -1.30 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 176 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

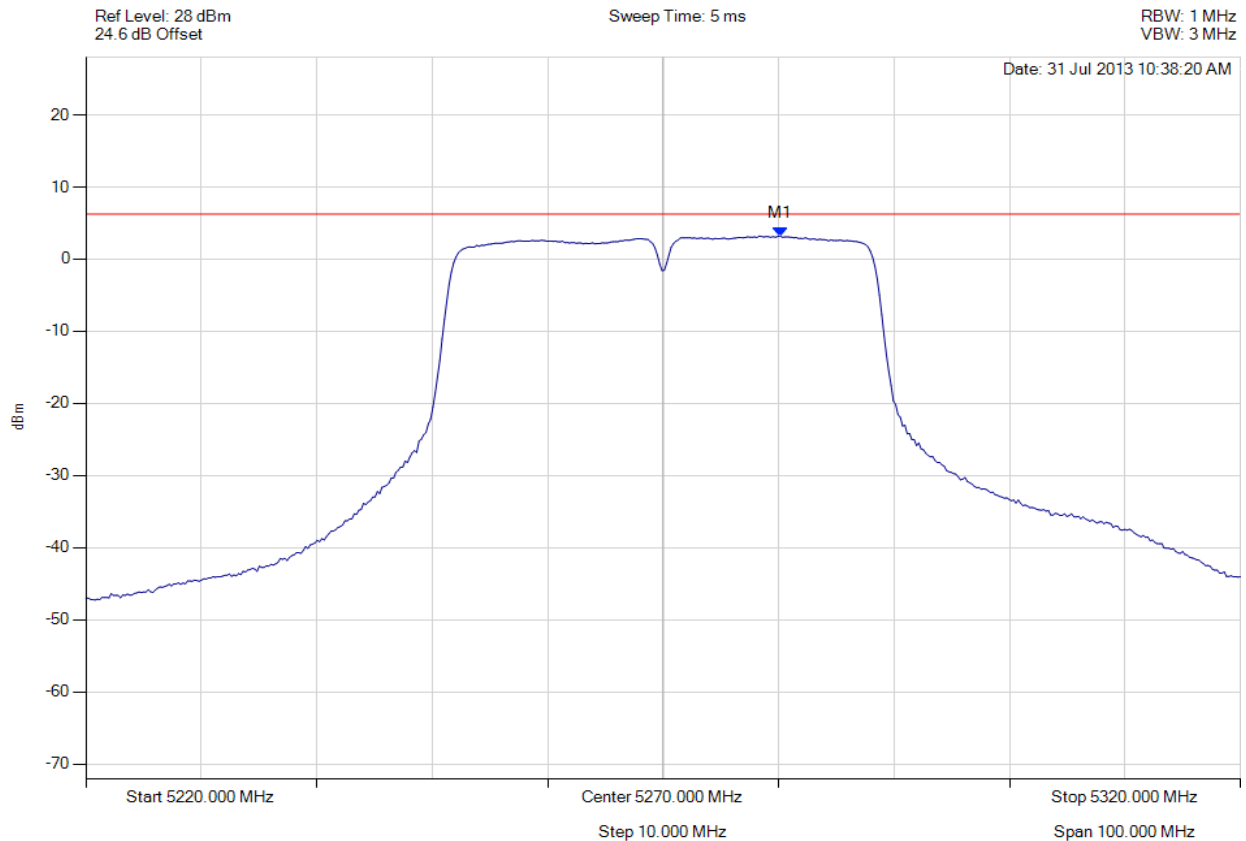

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5280.120 MHz : 3.219 dBm	Limit: ≤ 6.229 dBm Margin: -3.01 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 177 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

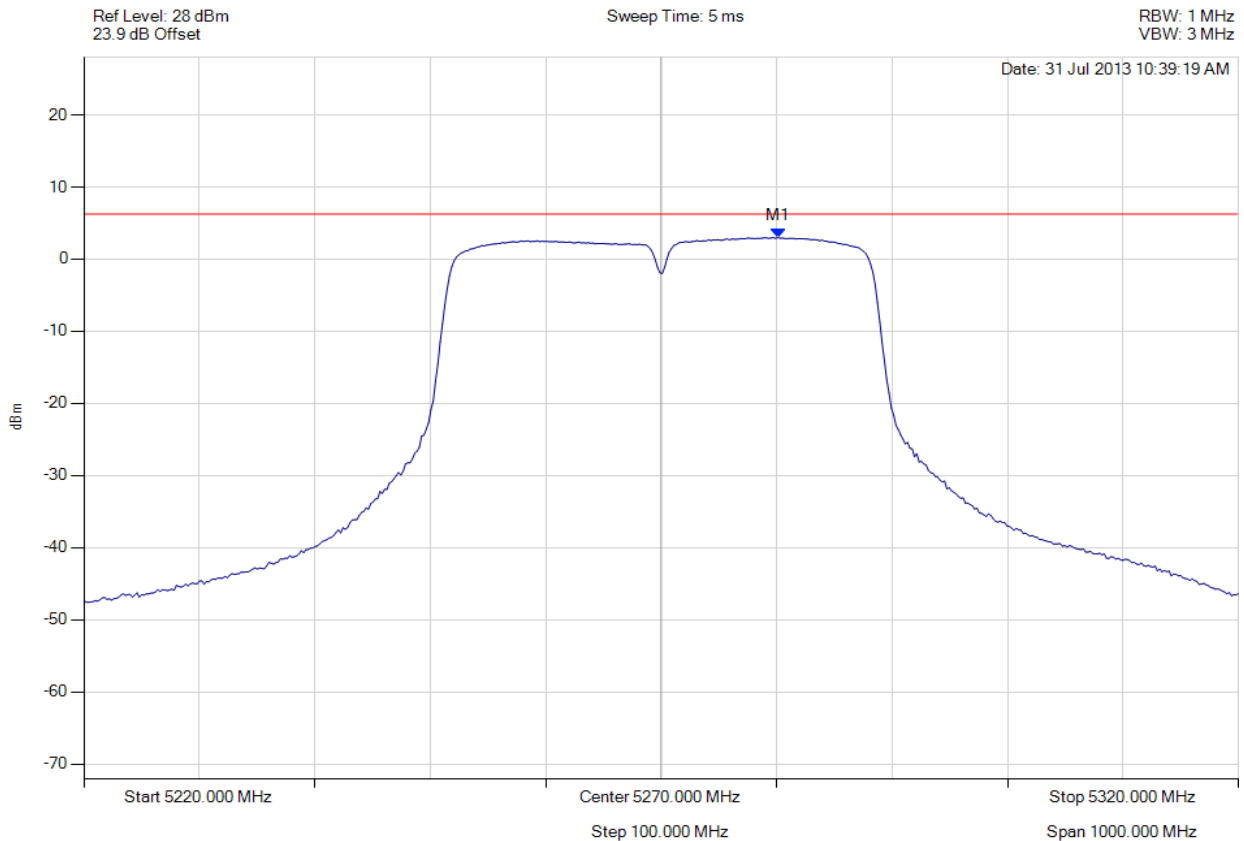

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5280.120 MHz : 3.003 dBm	Limit: ≤ 6.229 dBm Margin: -3.23 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 178 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

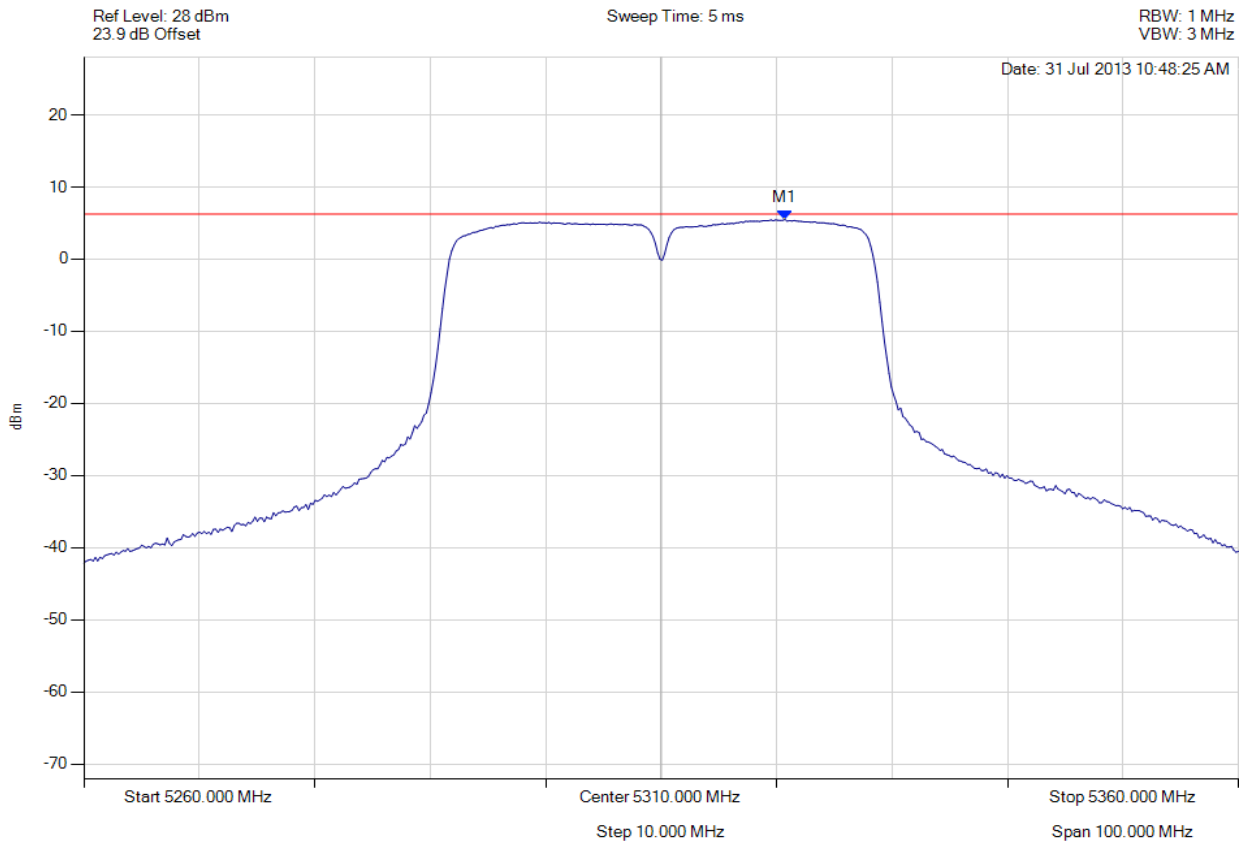

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5320.721 MHz : 5.503 dBm	Limit: ≤ 6.229 dBm Margin: -0.73 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 179 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

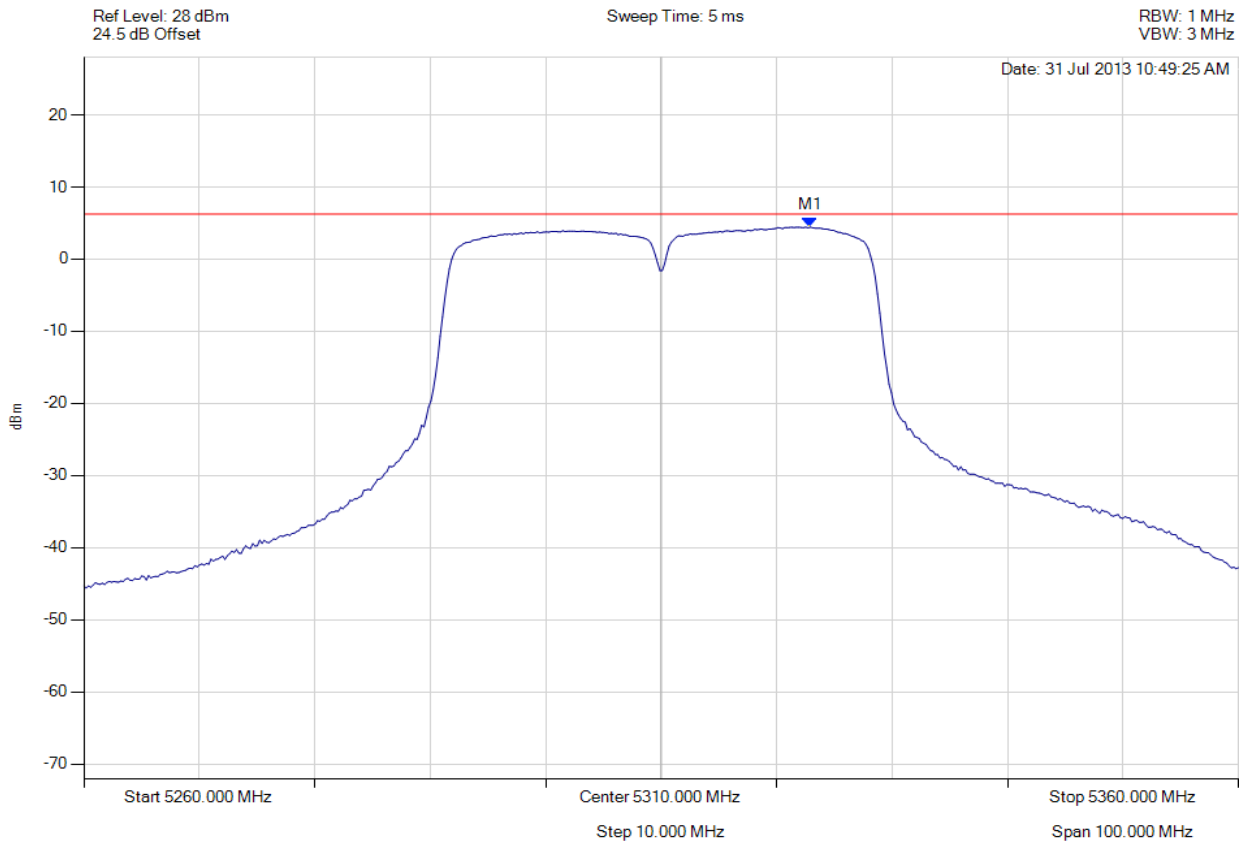

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5322.926 MHz : 4.436 dBm	Limit: ≤ 6.229 dBm Margin: -1.79 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 180 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

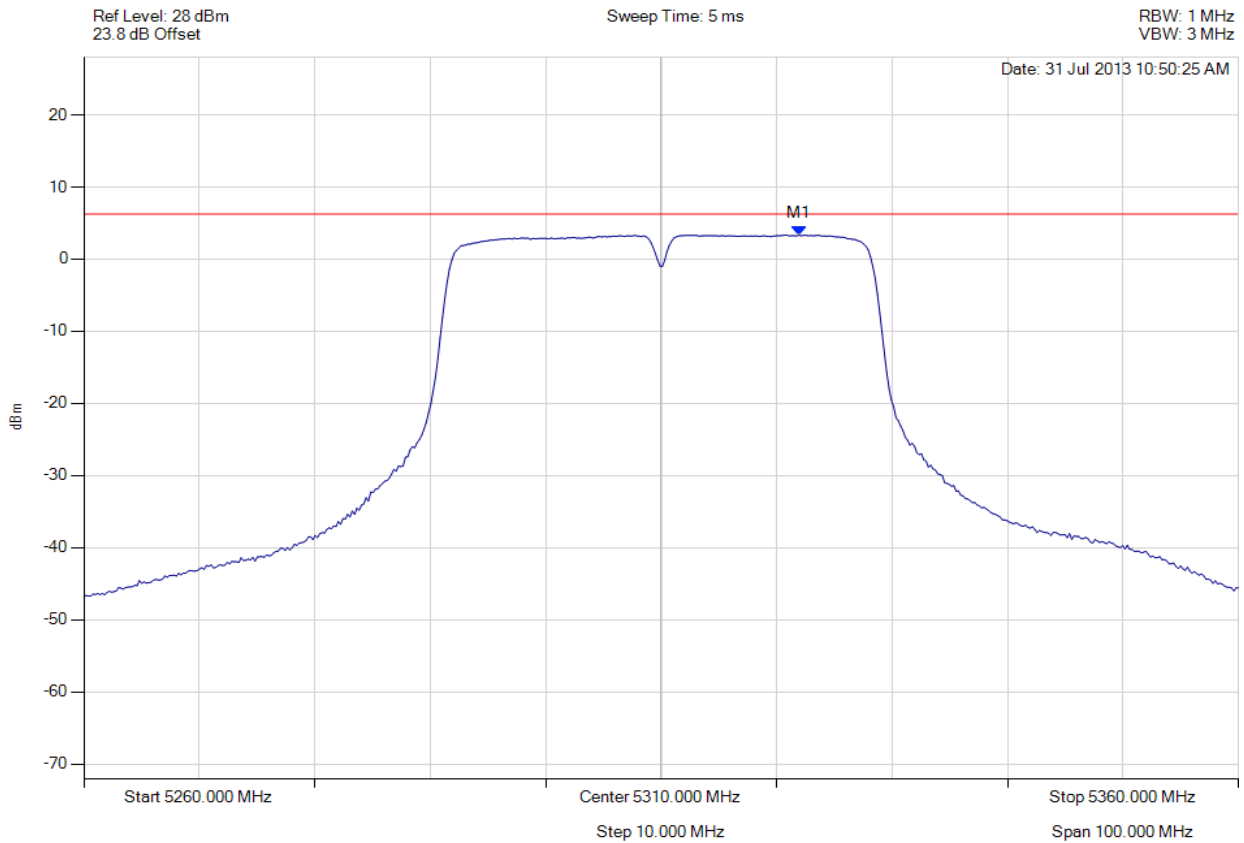

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5321.924 MHz : 3.328 dBm	Limit: ≤ 6.229 dBm Margin: -2.90 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 181 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

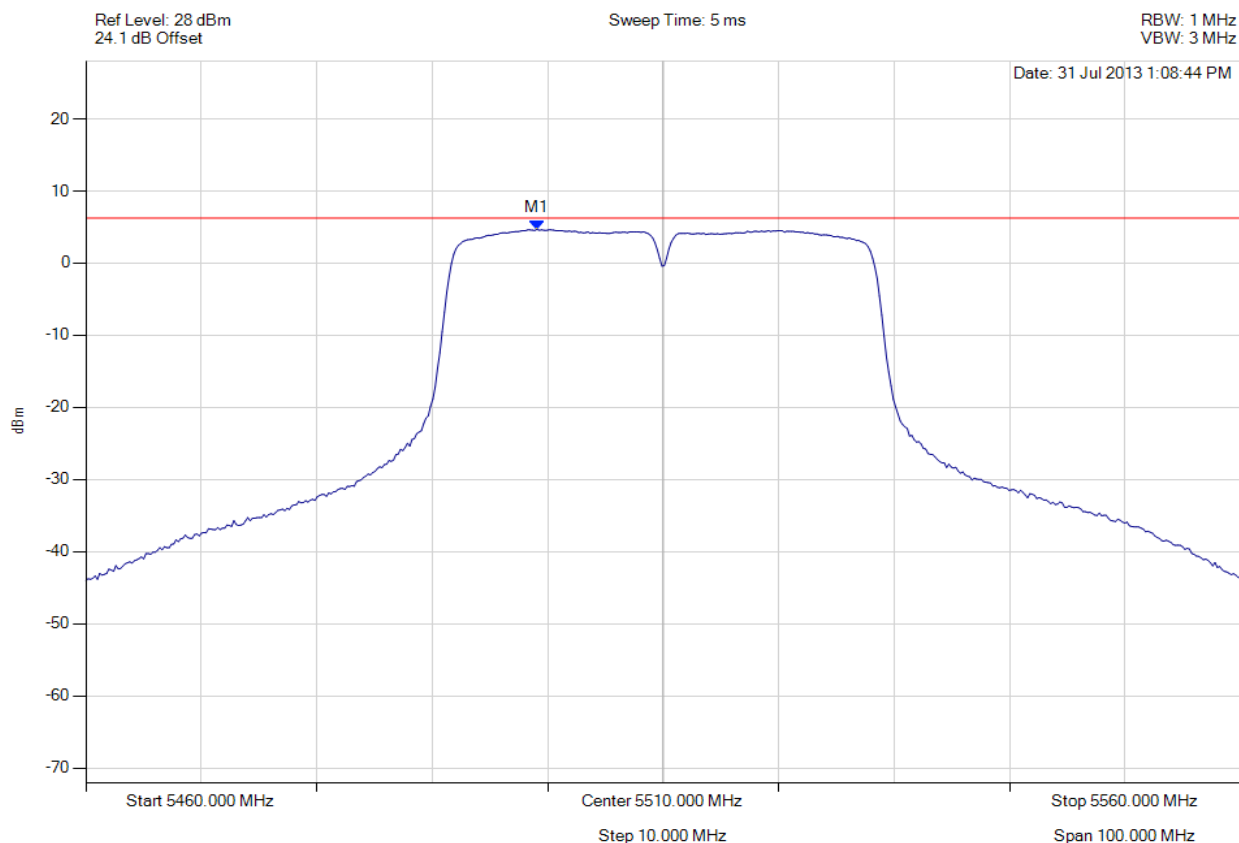

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5499.078 MHz : 4.668 dBm	Limit: ≤ 6.229 dBm Margin: -1.56 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 182 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

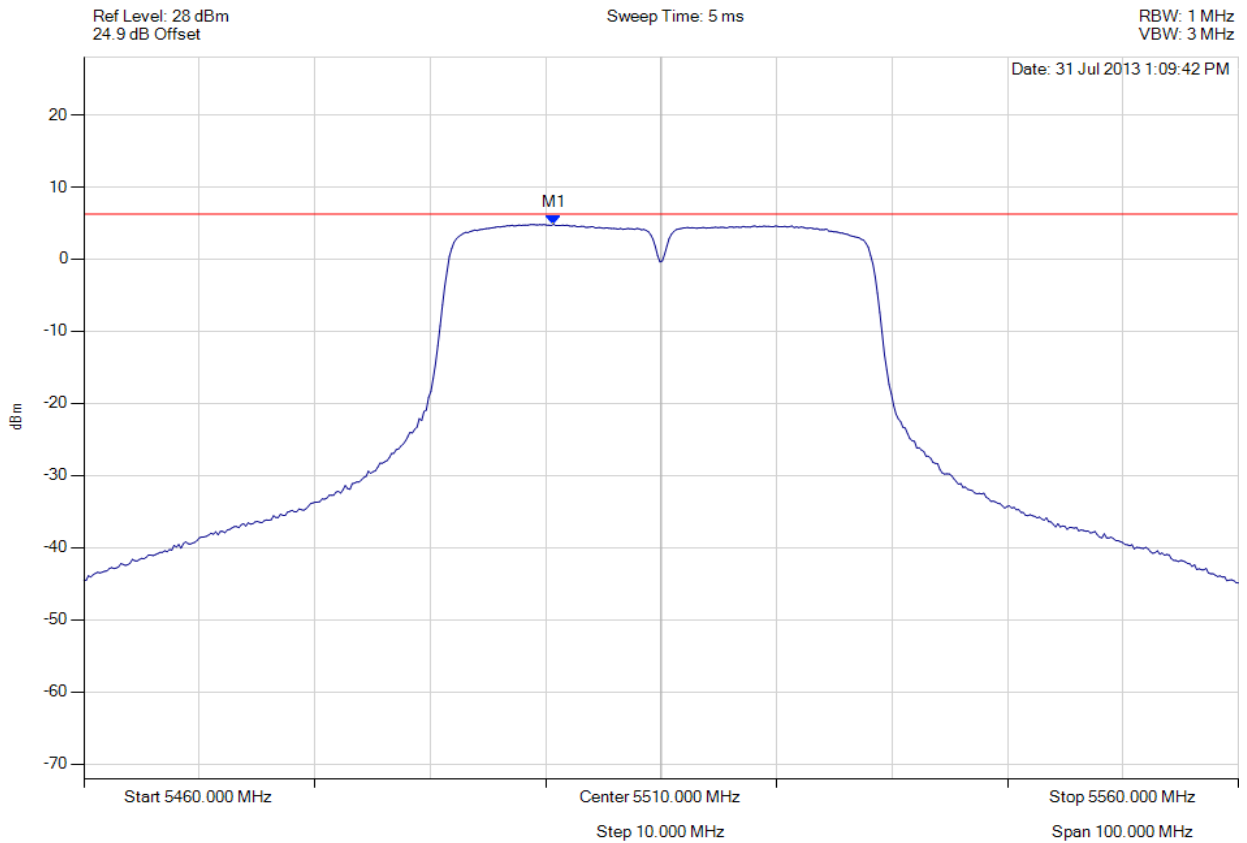

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5500.681 MHz : 4.832 dBm	Limit: ≤ 6.229 dBm Margin: -1.40 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 183 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

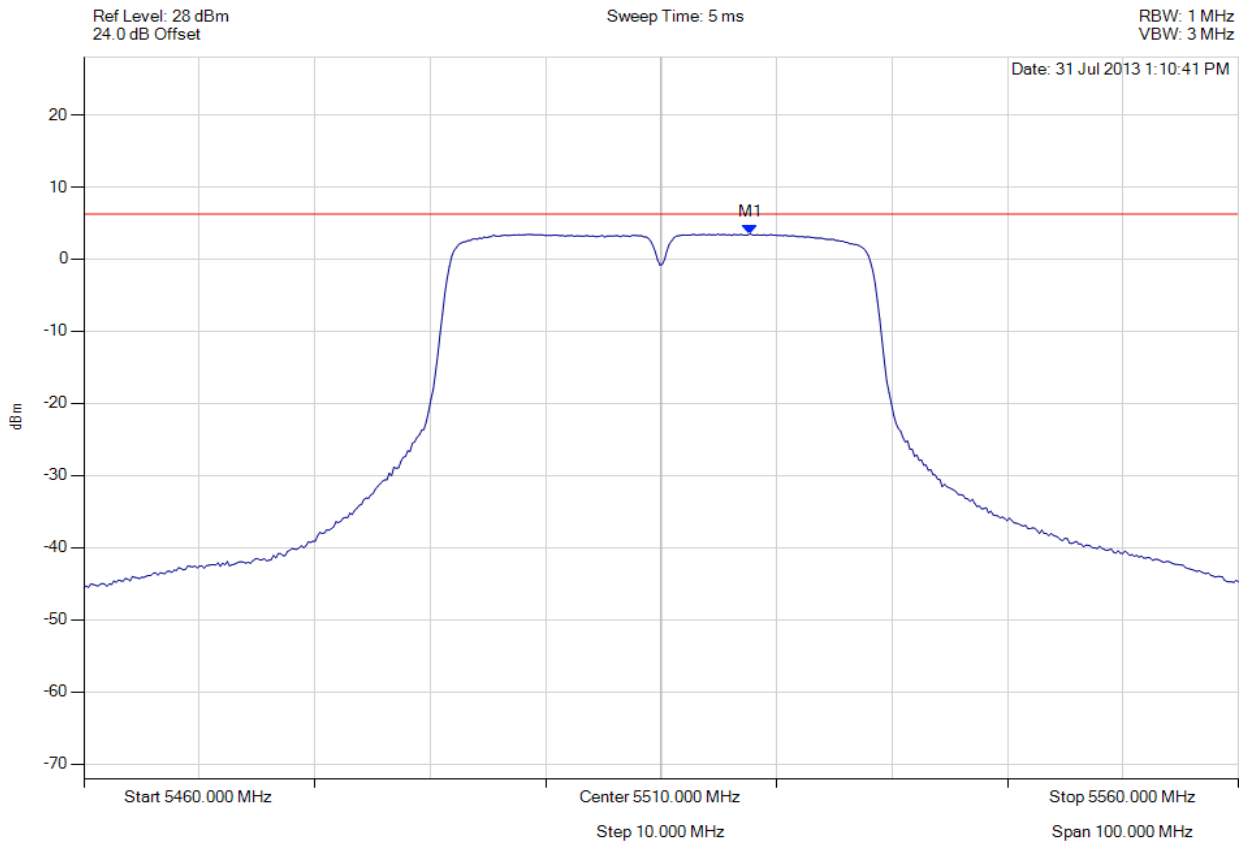

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5517.715 MHz : 3.500 dBm	Limit: ≤ 6.229 dBm Margin: -2.73 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 184 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

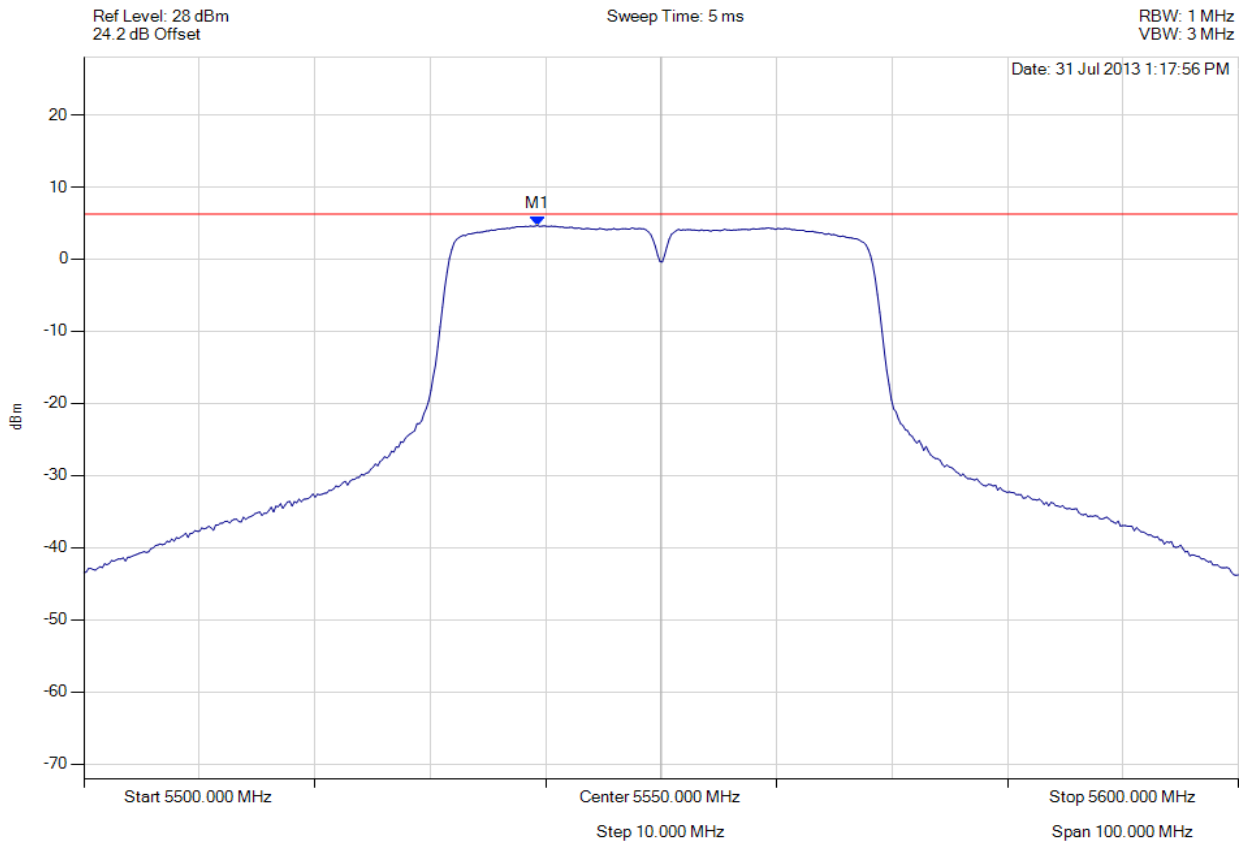

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5539.279 MHz : 4.669 dBm	Limit: ≤ 6.229 dBm Margin: -1.56 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 185 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

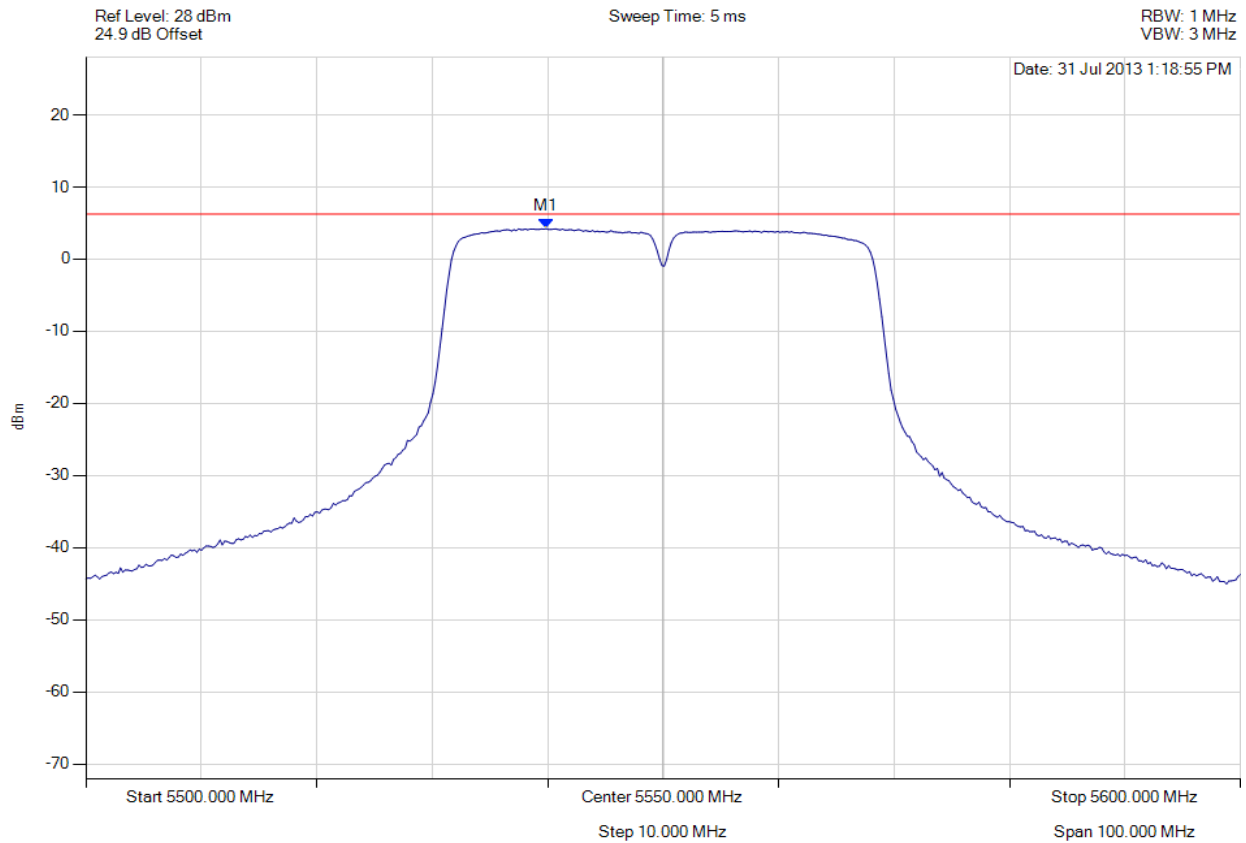

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5539.880 MHz : 4.229 dBm	Limit: ≤ 6.229 dBm Margin: -2.00 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 186 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

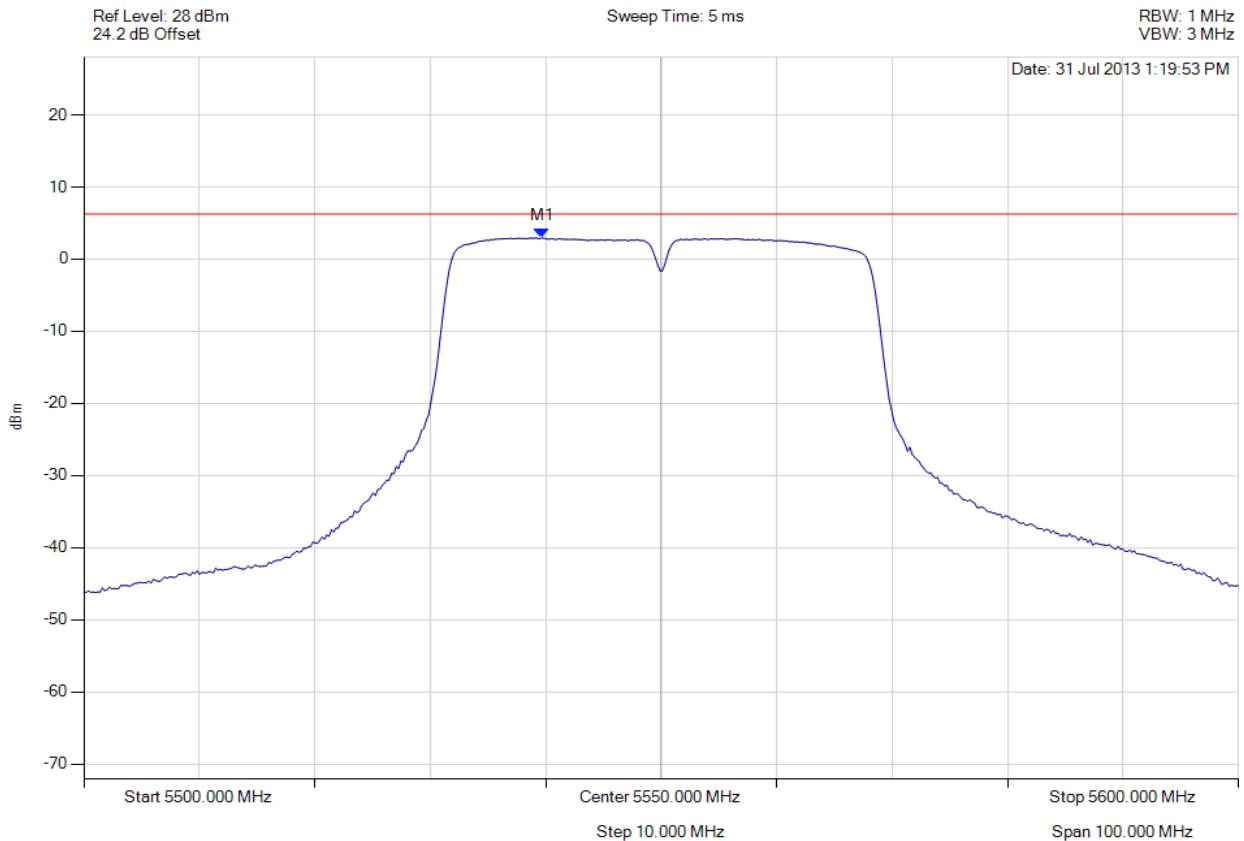

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5539.679 MHz : 2.962 dBm	Limit: ≤ 6.229 dBm Margin: -3.27 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 187 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5670.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

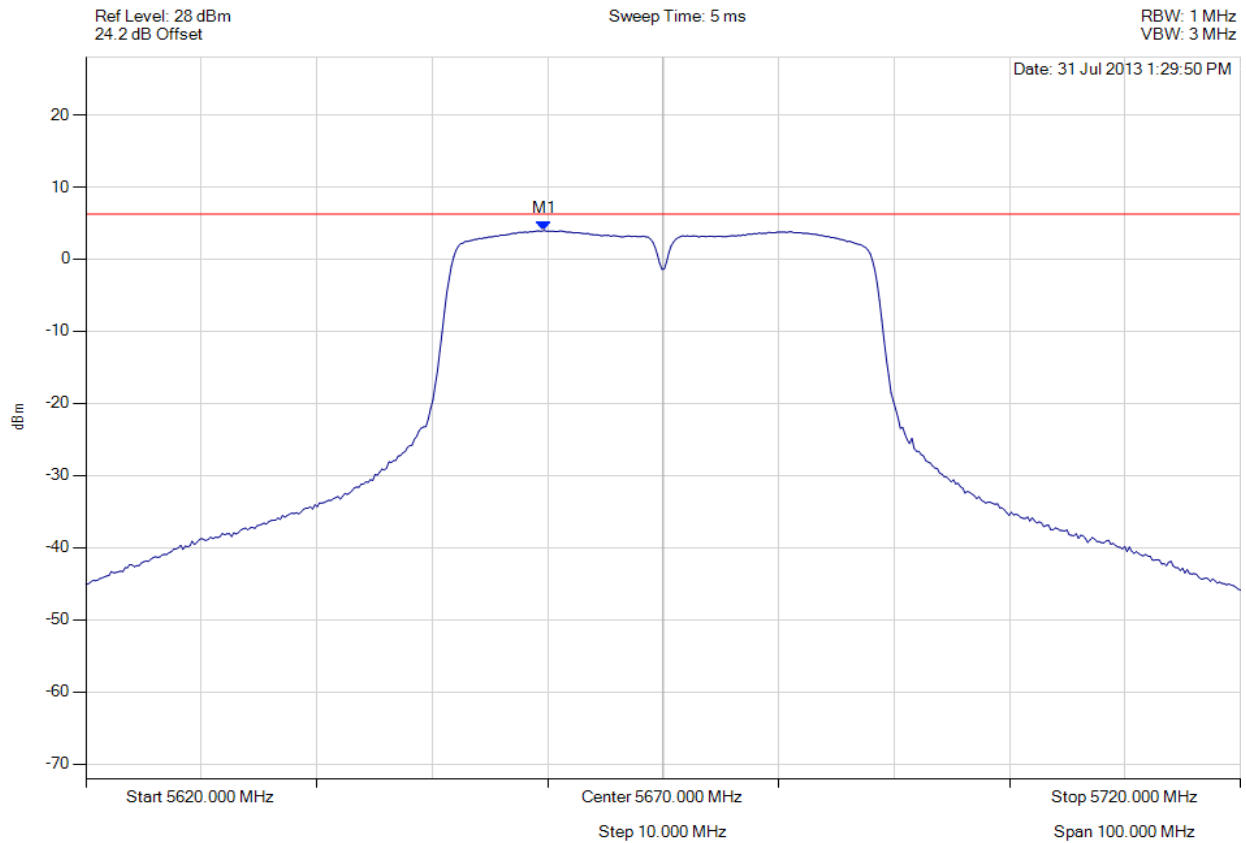

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5659.679 MHz : 3.967 dBm	Limit: ≤ 6.229 dBm Margin: -2.26 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 188 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5670.00 MHz, Chain b, Temp: Ambient, Voltage: 12 Vdc

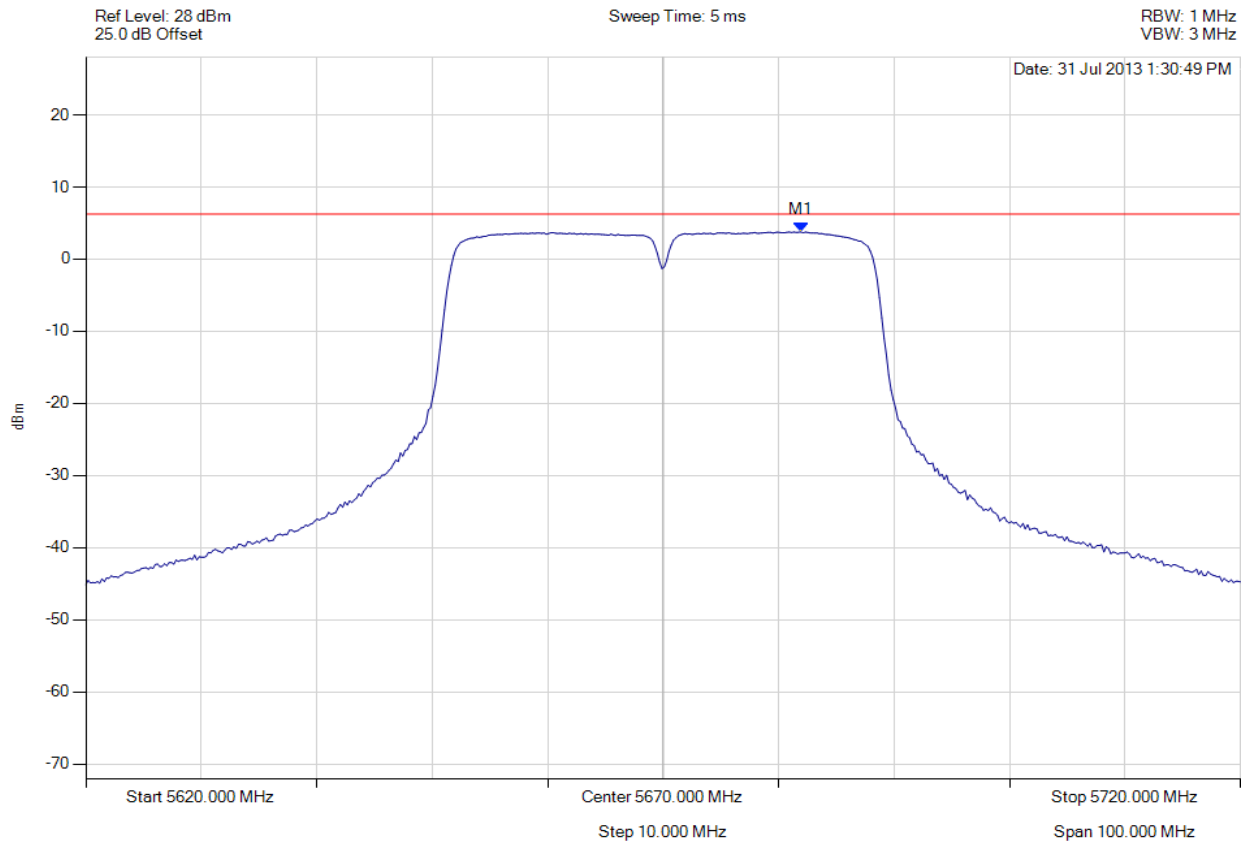

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5681.924 MHz : 3.770 dBm	Limit: ≤ 6.229 dBm Margin: -2.46 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 189 of 196



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5670.00 MHz, Chain c, Temp: Ambient, Voltage: 12 Vdc

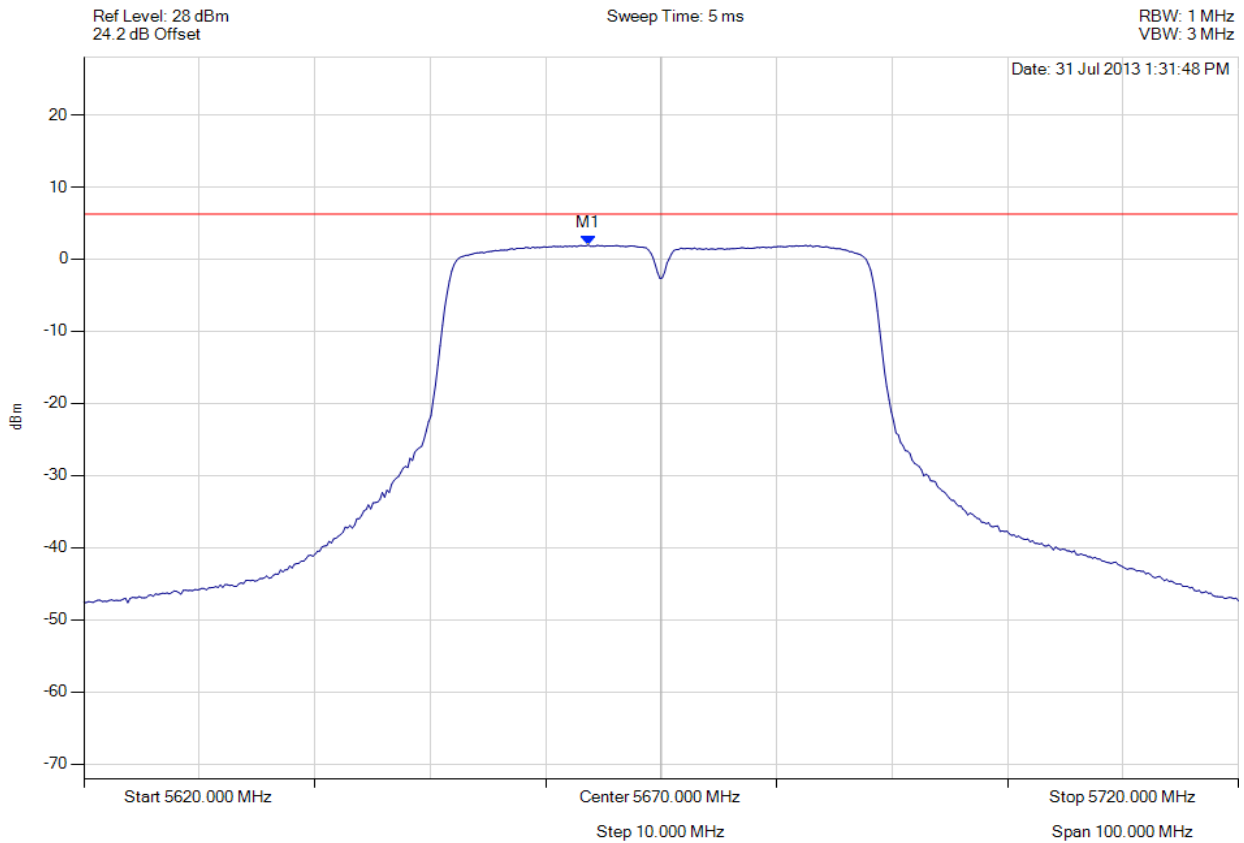

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5663.687 MHz : 1.956 dBm	Limit: ≤ 6.229 dBm Margin: -4.27 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




A.1.3. Peak Excursion Ratio



PEAK EXCURSION RATIO

Variant: 802.11a, Channel: 5260.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

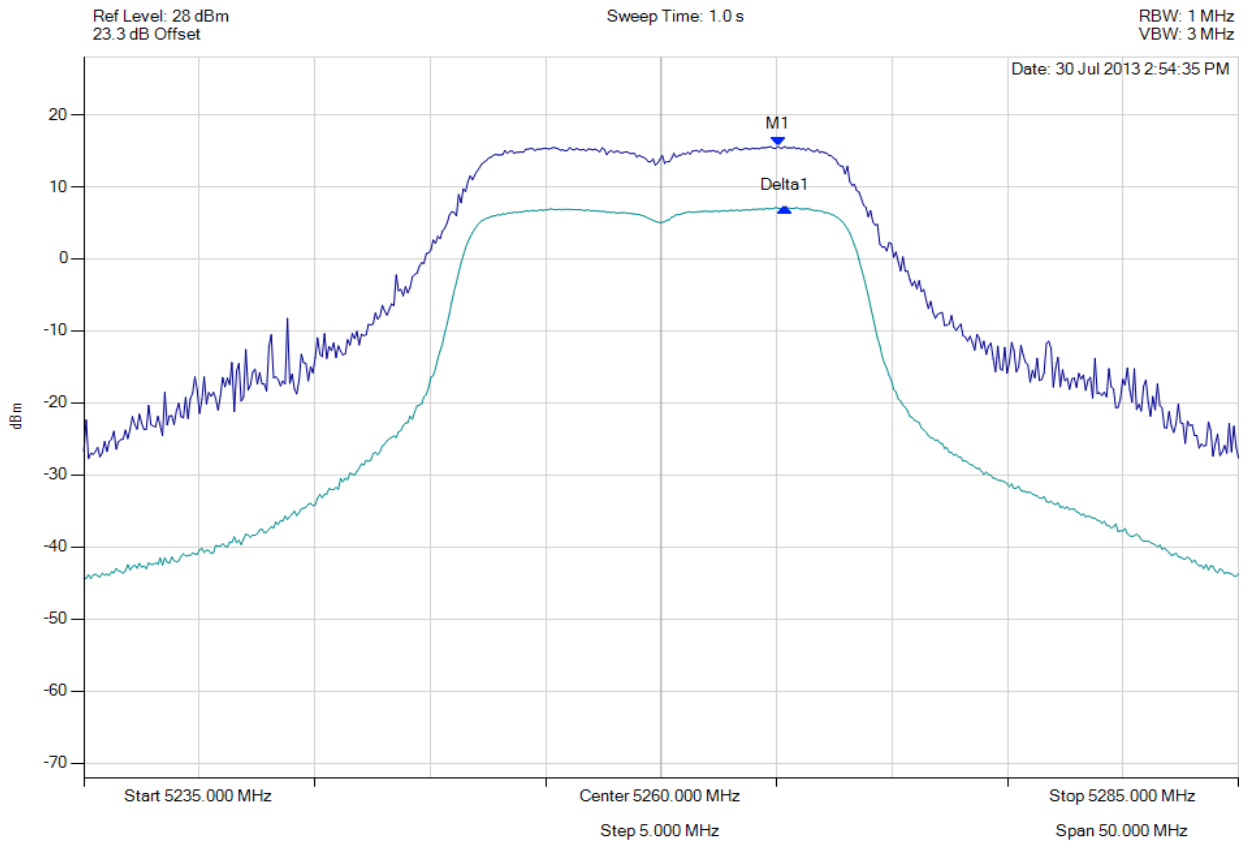

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Sweep Count = 0 RF Atten (dB) = 20 TRACE 1: Detector = MAX PEAK Trace Mode = VIEW TRACE 2: Detector = RMS Trace Mode = VIEW	M1 : 5265.060 MHz : 15.596 dBm Delta1 : 301 KHz : -8.443 dB	Measured Excursion Ratio: 8.44 dB Limit: 13.0 dB Margin: -4.56 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 191 of 196



PEAK EXCURSION RATIO

Variant: 802.11a, Channel: 5500.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

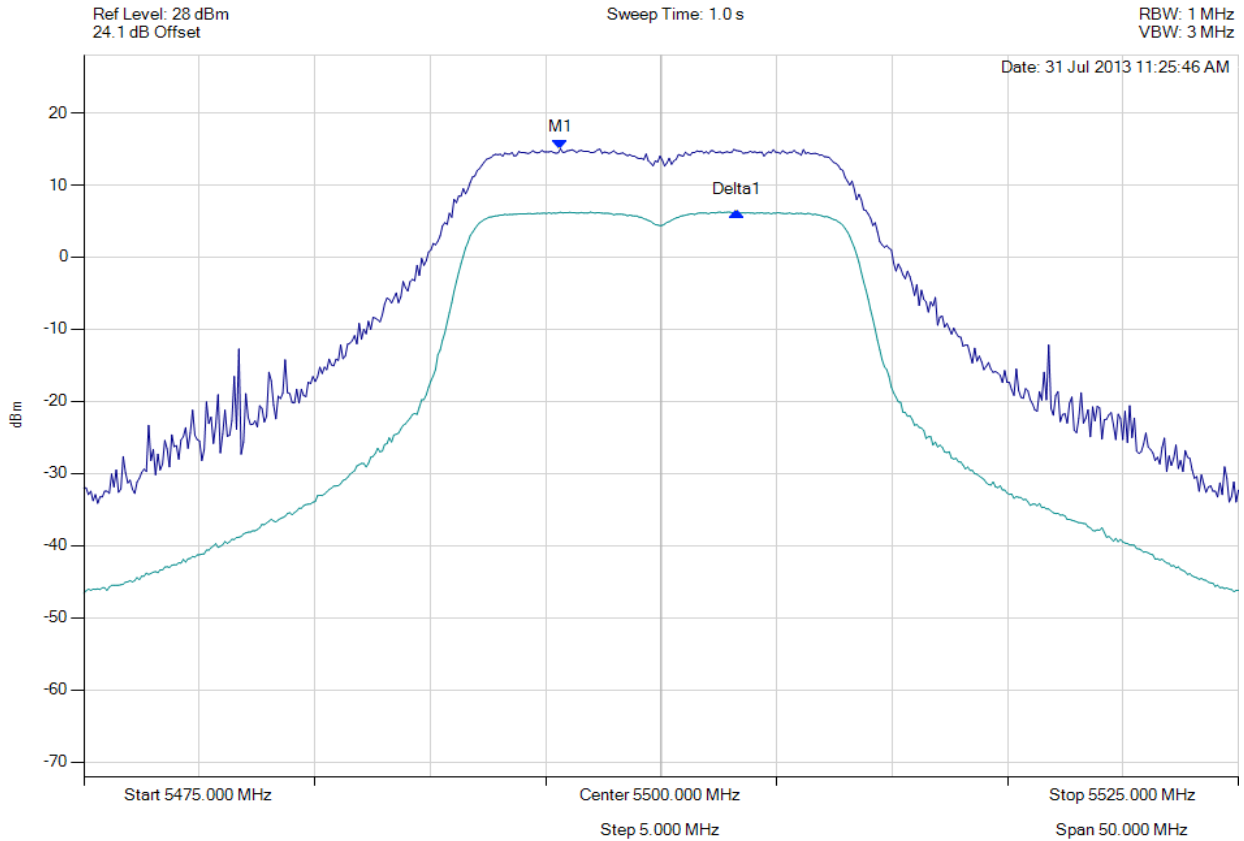

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Sweep Count = 0 RF Atten (dB) = 20 TRACE 1: Detector = MAX PEAK Trace Mode = VIEW TRACE 2: Detector = RMS Trace Mode = VIEW	M1 : 5495.641 MHz : 15.012 dBm Delta1 : 7.615 MHz : -8.739 dB	Measured Excursion Ratio: 8.74 dB Limit: 13.0 dB Margin: -4.26 dB


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PEAK EXCURSION RATIO

Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

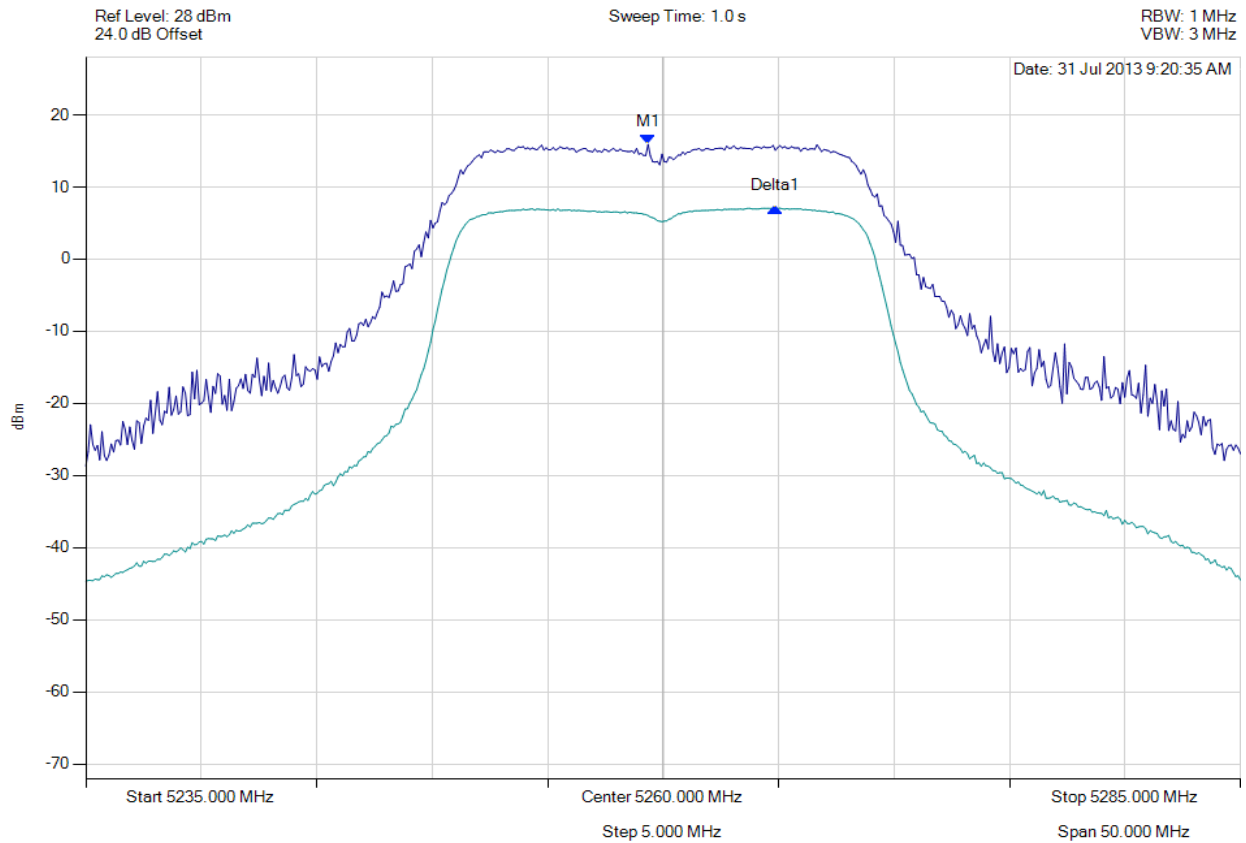

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Sweep Count = 0 RF Atten (dB) = 20 TRACE 1: Detector = MAX PEAK Trace Mode = VIEW TRACE 2: Detector = RMS Trace Mode = VIEW	M1 : 5259.349 MHz : 15.901 dBm Delta1 : 5.511 MHz : -8.821 dB	Measured Excursion Ratio: 8.82 dB Limit: 13.0 dB Margin: -4.18 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 193 of 196



PEAK EXCURSION RATIO

Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

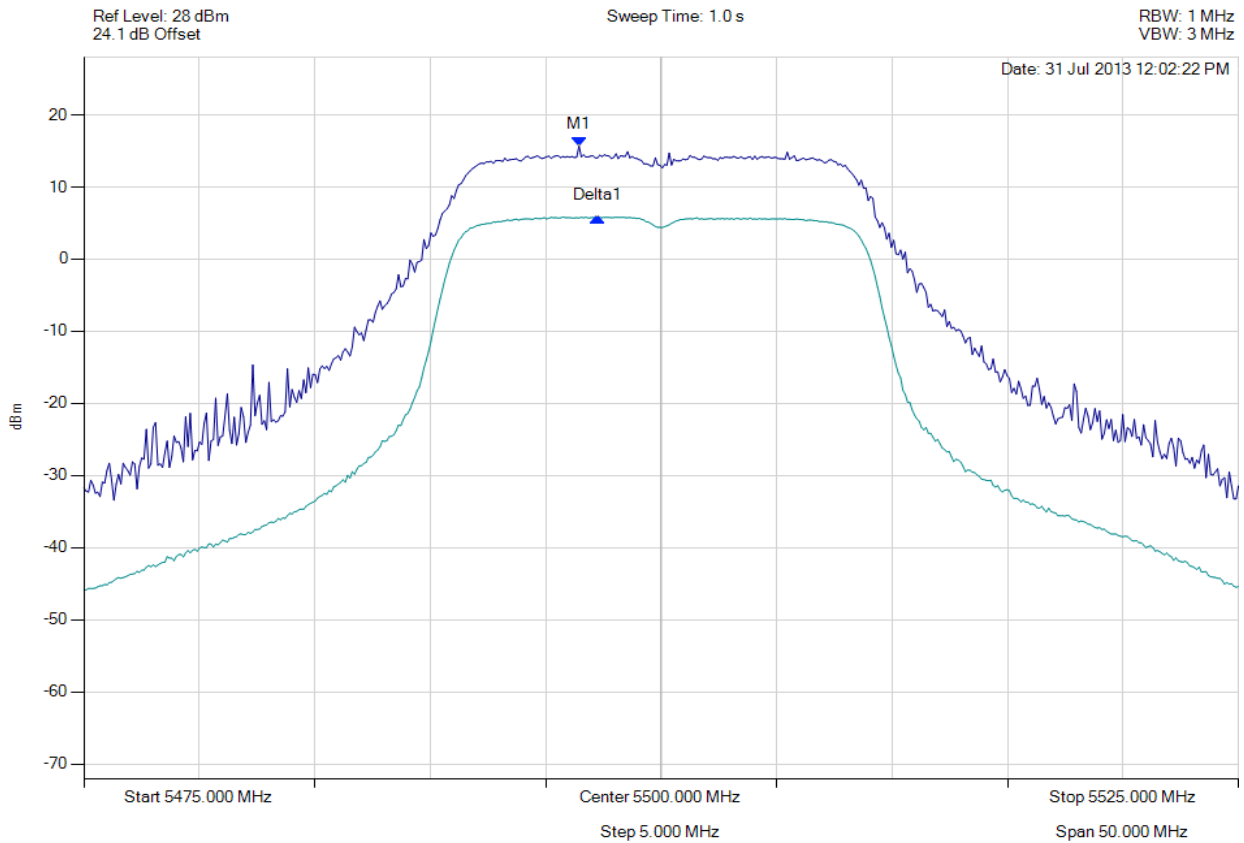

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Sweep Count = 0 RF Atten (dB) = 20 TRACE 1: Detector = MAX PEAK Trace Mode = VIEW TRACE 2: Detector = RMS Trace Mode = VIEW	M1 : 5496.443 MHz : 15.684 dBm Delta1 : 802 KHz : -9.831 dB	Measured Excursion Ratio: 9.83 dB Limit: 13.0 dB Margin: -3.17 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 194 of 196



PEAK EXCURSION RATIO

Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

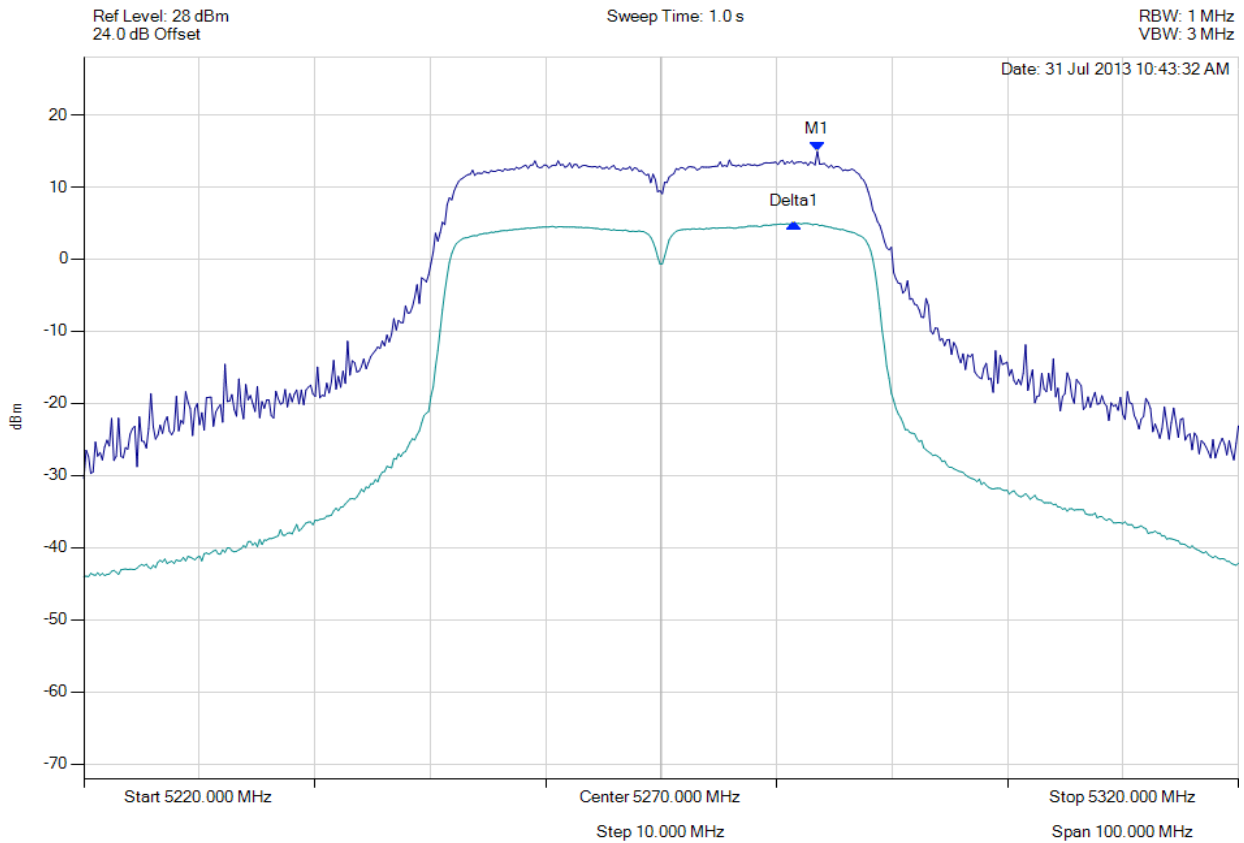

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Sweep Count = 0 RF Atten (dB) = 20 TRACE 1: Detector = MAX PEAK Trace Mode = VIEW TRACE 2: Detector = RMS Trace Mode = VIEW	M1 : 5283.527 MHz : 14.944 dBm Delta1 : -2004008 Hz : -9.974 dB	Measured Excursion Ratio: 9.97 dB Limit: 13.0 dB Margin: -3.03 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba Networks APINR155, APINR15P
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: ARUB156-U1 Rev A
Issue Date: 8th August 2013
Page: 195 of 196



PEAK EXCURSION RATIO

Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain a, Temp: Ambient, Voltage: 12 Vdc

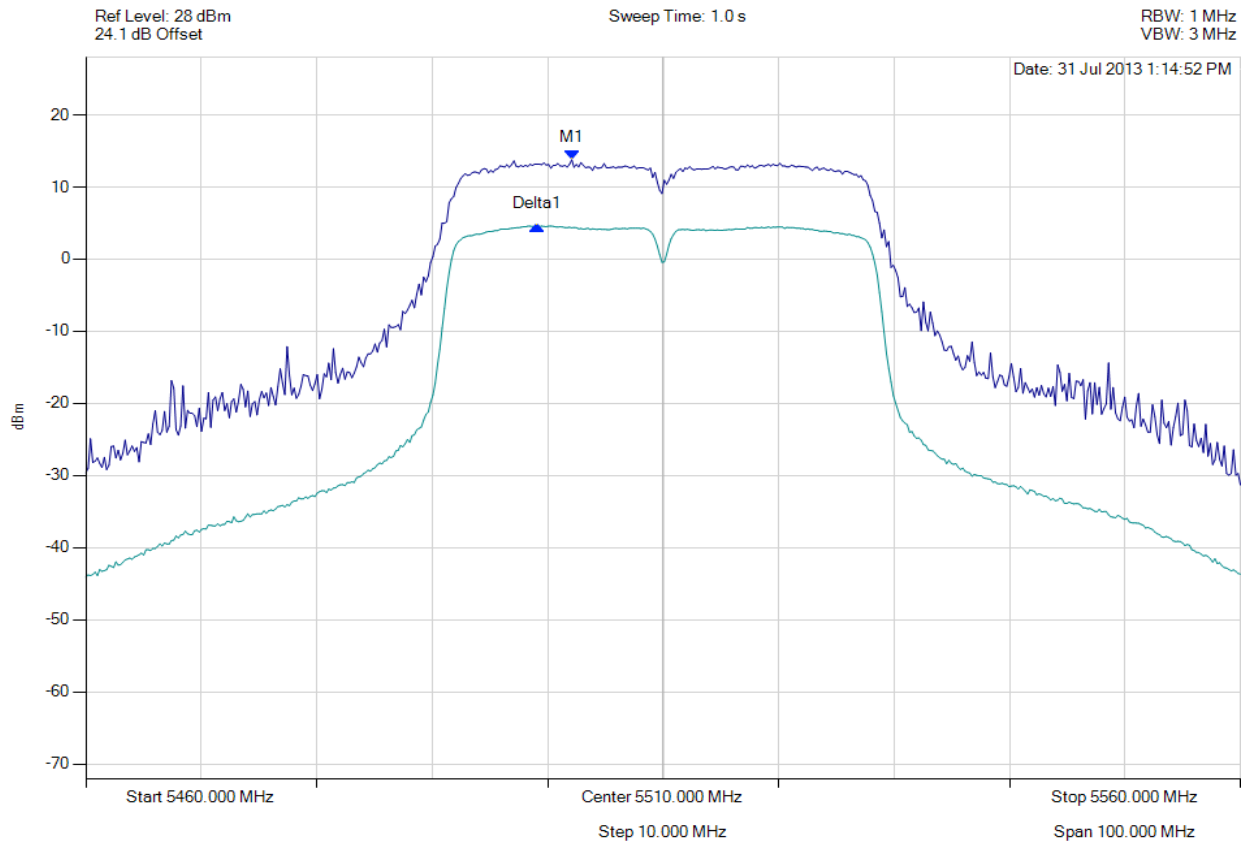

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Sweep Count = 0 RF Atten (dB) = 20 TRACE 1: Detector = MAX PEAK Trace Mode = VIEW TRACE 2: Detector = RMS Trace Mode = VIEW	M1 : 5502.084 MHz : 13.776 dBm Delta1 : -3006012 Hz : -9.139 dB	Measured Excursion Ratio: 9.14 dB Limit: 13.0 dB Margin: -3.86 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200
Pleasanton, CA 94566, USA
Tel: 1.925.462.0304
Fax: 1.925.462.0306
www.micomlabs.com