

Company: Hewlett Packard Enterprise

Test of: APINR203, APINP203 (2x2)

To: FCC CFR 47 Part 15 Subpart E 15.407

Report No.: HPEN96-U12 Rev A (2x2)

TEST REPORT (CONDUCTED & RADIATED DATA)





Test of: Hewlett Packard Enterprise APINR203, APINP203 (2x2)
to

To: FCC CFR 47 Part 15 Subpart E 15.407

Test Report Serial No.: HPEN96-U12 Rev A (2x2)

This report supersedes: NONE

As a result of the 6 Mbyte FCC file size limitation potentially large test reports require to be split into smaller components. This DFS report combined with the reports listed in the table below demonstrate compliance with the 15.407 standard.

Test Reports
HPEN96-U12_DFS
HPEN96-U12 Rev A (1x1) Conducted & Radiated Data
HPEN96-U12 Rev A (2x2) Conducted & Radiated Data

Applicant: Hewlett Packard Enterprise
3000 Hanover St.
Palo Alto, California 94034
USA

Product Function: Wireless LAN Access Point

Issue Date: 13th June 2017

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 3 of 189

Table of Contents

1. ACCREDITATION, LISTINGS & RECOGNITION	4
1.1. TESTING ACCREDITATION.....	4
1.2. RECOGNITION	5
1.3. PRODUCT CERTIFICATION	6
2. DOCUMENT HISTORY	7
3. TEST RESULT CERTIFICATE	8
4. REFERENCES AND MEASUREMENT UNCERTAINTY	9
4.1. Normative References	9
4.2. Test and Uncertainty Procedure	10
5. PRODUCT DETAILS AND TEST CONFIGURATIONS	11
5.1. Technical Details	11
5.2. Scope Of Test Program	12
5.3. Equipment Model(s) and Serial Number(s)	13
5.4. Antenna Details	13
5.5. Cabling and I/O Ports	13
5.6. Test Configurations.....	14
5.7. Equipment Modifications	14
5.8. Deviations from the Test Standard	14
6. TEST SUMMARY	15
7. TEST EQUIPMENT CONFIGURATION(S)	16
7.1. Conducted	16
7.2. Radiated Emissions - 3m Chamber.....	18
8. MEASUREMENT AND PRESENTATION OF TEST DATA	21
9. TEST RESULTS	22
9.1. Peak Transmit Power	22
9.2. 26 dB & 99% Bandwidth	32
9.3. Power Spectral Density	41
9.4. Radiated	51
9.4.1. TX Spurious & Restricted Band Emissions.....	54
9.4.2. Restricted Edge & Band-Edge Emissions	60
A. APPENDIX - GRAPHICAL IMAGES	69
A.1. 26 dB & 99% Bandwidth	70
A.2. Power Spectral Density	112
A.3. Radiated	175
A.3.1. TX Spurious & Restricted Band Emissions	175
A.3.2. Restricted Edge & Band-Edge Emissions	181

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



Accredited Laboratory

A2LA has accredited

MICOM LABS

Pleasanton, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).



Presented this 4th day of February 2016.



Senior Director of Quality & Communications
For the Accreditation Council
Certificate Number 2381.01
Valid to November 30, 2017

For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 5 of 189

1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2 4143A-3
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 6 of 189

1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



Accredited Product Certification Body

A2LA has accredited

MICOM LABS

Pleasanton, CA

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC 17065:2012 *Requirements for bodies certifying products, processes and services*. This accreditation demonstrates technical competence for a defined scope and the operation of a management system.



Presented this 4th day of February 2016.

Senior Director of Quality & Communications
For the Accreditation Council
Certificate Number 2381.02
Valid to November 30, 2017

For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation.

United States of America – Telecommunication Certification Body (TCB)
Industry Canada – Certification Body, CAB Identifier – US0159
Europe – Notified Body (NB), NB Identifier - 2280
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 7 of 189

2. DOCUMENT HISTORY

Document History			
Document	Revision	Date	Comments
HPEN96-U12_DFS	Draft	23 rd May 2017	Draft for client review
HPEN96-U12 Rev A (2x2)	Draft	23 rd May 2017	Draft for client review (Conducted & Radiated Data)
HPEN96-U12_DFS	Rev A	13th June 2017	Initial release (1x1 & 2x2 Data)
HPEN96-U12 Rev A (2x2)	Rev A	13th June 2017	Initial release (Conducted & Radiated Data)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 8 of 189

3. TEST RESULT CERTIFICATE

Manufacturer: Hewlett Packard Enterprise 3000 Hanover St. Palo Alto California 94034 USA	Tested By: MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Model: APINR203, APINP203	Telephone: +1 925 462 0304
Type Of Equipment: Wireless Access Point	Fax: +1 925 462 0306
S/N's: CNCPK2T006, CNCPK2T00L CNCQK2T03Y (DFS)	
Test Date(s): 26 January - 21 February 2017 12 April - 19 May 2017 (DFS)	Website: www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC CFR 47 Part 15 Subpart E 15.407	EQUIPMENT COMPLIES


MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.


Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:




 Graeme Grieve
 Quality Manager MiCOM Labs, Inc.


 Gordon Hurst
 President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 662911 D01 & D02	Oct 31 2013	Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band
II	KDB 905462 D07 v02	22nd August 2016	Test guidance to demonstrate compliance for U-NII devices subject to DFS requirements.
III	KDB 926956 D01 v02	22nd August 2016	U-NII Device Transition Plan
IV	KDB 789033 D02 v01r03	22nd August 2016	General UNII Test Procedures New Rules
V	A2LA	June 2015	R105 - Requirement's When Making Reference to A2LA Accreditation Status
VI	ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
VII	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
VIII	CISPR 22	2008	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement
IX	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
X	FCC 06-96	Jun 30 2006	Memorandum Opinion and Order
XI	FCC 47 CFR Part 15.407	2016	Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices
XII	ICES-003	Issue 6 Jan 2016	Spectrum Management and Telecommunications; Interference-Causing Equipment Standard. Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement.
XIII	M 3003	Edition 3 Nov.2012	Expression of Uncertainty and Confidence in Measurements
XIV	RSS-247 Issue 1	May 2015	Digital Transmission Systems (DTSS), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices
XV	RSS-Gen Issue 4	November 2014	General Requirements and Information for the Certification of Radiocommunication Equipment
XVI	KDB 644545 D03 v01	August 14th 2014	Guidance for IEEE 802.11ac New Rules
XVII	FCC 47 CFR Part 2.1033	2016	FCC requirements and rules regarding photographs and test setup diagrams.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 10 of 189

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 11 of 189

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

Details	Description
Purpose:	Test of the Hewlett Packard Enterprise APINR203 / APINP203 (2x2 mode) to FCC CFR 47 Part 15 Subpart E 15.407. Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices
Applicant:	Hewlett Packard Enterprise 3000 Hanover St. Palo Alto California 94034 USA
Manufacturer:	Hewlett Packard Enterprise
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	HPEN96-U12 Draft 2X2
Date EUT received:	23rd January 2017
Standard(s) applied:	FCC CFR 47 Part 15 Subpart E 15.407
Dates of test (from - to):	26 January - 21 February 2017
No of Units Tested:	3
Product Family Name:	Access Point
Model(s):	APINR203 / APINP203
Location for use:	Indoors
Declared Frequency Range(s):	5250 - 5350 MHz; 5470 - 5725 MHz;
Type of Modulation:	OFDM
EUT Modes of Operation:	5250 - 5350 MHz: 802.11a; ac-80; HT-20; HT-40 5470 - 5725 MHz: 802.11a; ac-80; HT-20; HT-40
Declared Nominal Output Power (dBm)	+24 dBm
Transmit/Receive Operation:	Transceiver - Full Duplex
Rated Input Voltage and Current:	Ac 100-240V, APINR203: 0.3A, APINP203: 0.6A
Operating Temperature Range:	Nominal: 20 °C Max: 40 °C Min: 0 °C
ITU Emission Designator:	802.11a: 18M8D1D 802.11n - HT20: 18M0D1D 802.11n - HT40: 40M7D1D 802.11ac-80: 77M0D1D
Equipment Dimensions:	155mm x 50mm x 95mm
Weight:	0.320 kg (AP-203R) & 0.340 kg (AP-203RP)
Hardware Rev:	1
Software Rev:	6.5.4.0 6.5.4.0 Build 59274 (DFS)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

5.2. Scope Of Test Program


Hewlett Packard Enterprise APINR203 & APINP203

The scope of the test program was to test the Hewlett Packard Enterprise APINR203 & APINP203 configurations in the frequency ranges 5250 - 5350 MHz; 5470 - 5725 MHz; 5725 in 2x2 antenna mode for compliance against the following specification:

FCC CFR 47 Part 15 Subpart E 15.407

Radio Frequency Devices; Subpart E –Unlicensed National Information Infrastructure Devices.

Hewlett Packard Enterprise APINR203 & APINP203

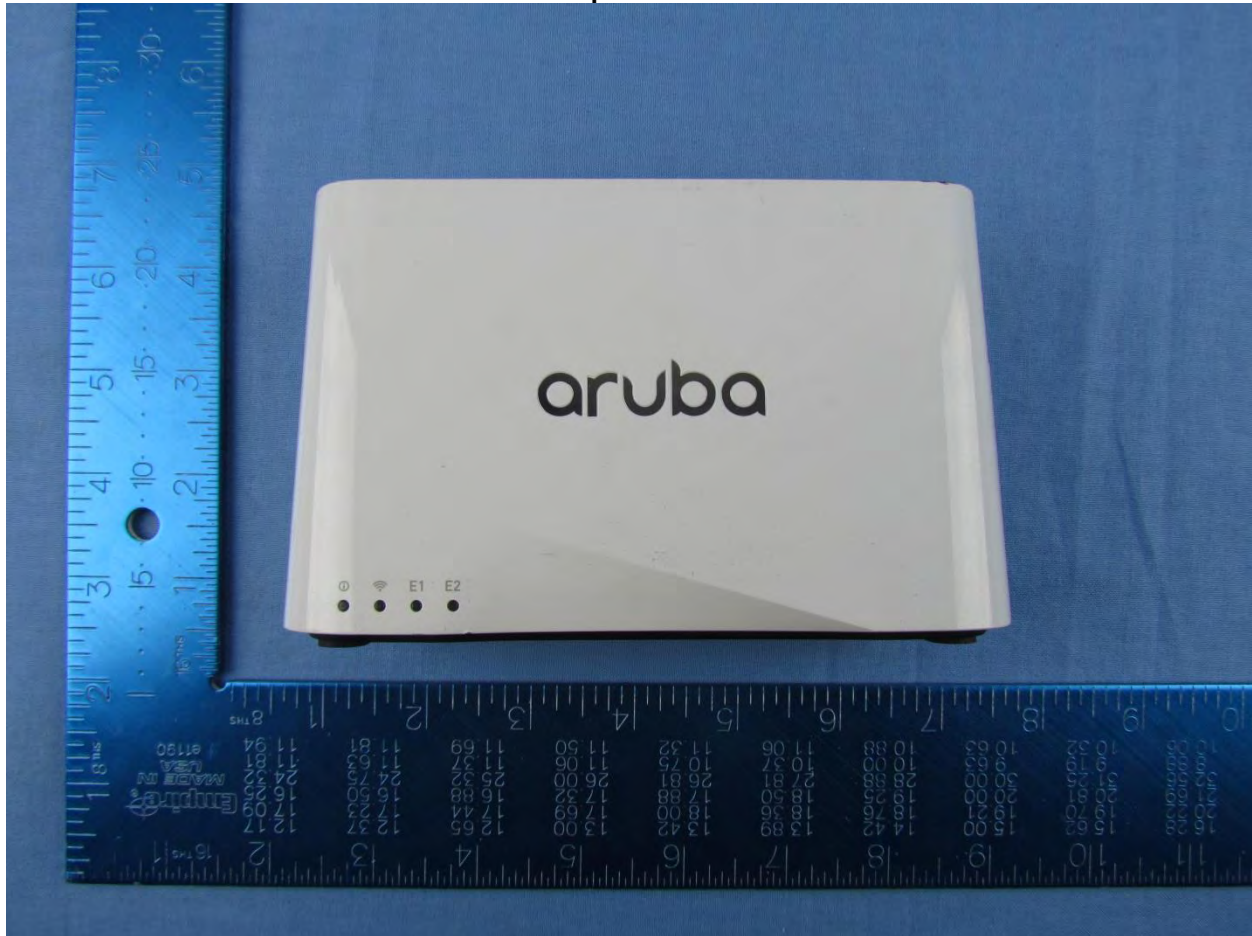

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 13 of 189

5.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	802.11a/b/g/n	Hewlett Packard Enterprises	APINP203	CNCPK2T006
EUT	802.11a/b/g/n	Hewlett Packard Enterprises	APINP203	CNCPK2T00L
EUT	802.11a/b/g/n	Hewlett Packard Enterprises	APINP203	CNCQK2T03Y (for DFS Testing)
Support	Laptop PC	Dell	E5550	None

5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
integral	HPE	Metal Sheet	5	2.9	3.0	360	-	5150 - 5250
integral	HPE	Metal Sheet	5	2.9	3.0	360	-	5250 - 5350
integral	HPE	Metal Sheet	5	2.9	3.0	360	-	5470 - 5725
integral	HPE	Metal Sheet	5	2.9	3.0	360	-	5725 - 5850

BF Gain - Beamforming Gain
Dir BW - Directional BeamWidth
X-Pol - Cross Polarization

5.5. Cabling and I/O Ports

Port Type	Max Cable Length	# Of Ports	Screened	Conn Type	Data Type
Ethernet	100	3	N	RJ45	Packet Data
AC Input	N/A	1	N	AC Wire	--
USB	Configuration	1	No	Micro USB	Data
USB	Mgmt only	1	No	USB	Data

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 14 of 189

5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s) (802.11a/b/g/n/ac)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
5250 - 5350 MHz				
a	6	5,260.00	5,300.00	5,320.00
ac-80	29.3	--	--	5,290.00
HT-20	6.5	5,260.00	5,300.00	5,320.00
HT-40	13.5	5,270.00	--	5,310.00
5470 - 5725 MHz				
a	6	5,500.00	5,580.00	5,720.00
ac-80	29.3	5,530.00	5,610.00	5,690.00
HT-20	6.5	5,500.00	5,580.00	5,720.00
HT-40	13.5	5,510.00	5,550.00	5,710.00

5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. Software updated to 6.5.3.0:59515 in order to bring DFS Probability of Detection into compliance.

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 15 of 189

6. TEST SUMMARY

List of Measurements


Test Header	Result	Data Link
Peak Transmit Power	Complies	View Data
26 dB & 99% Bandwidth	Complies	View Data
Power Spectral Density	Complies	View Data
Dynamic Frequency Selection (DFS)	Complies	HPEN96-U12_DFS
Radiated	Complies	-
TX Spurious & Restricted Band Emissions	Complies	View Data
Restricted Edge & Band-Edge Emissions	Complies	View Data

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

7. TEST EQUIPMENT CONFIGURATION(S)

7.1. Conducted

Conducted RF Emission Test Set-up(s) The following tests were performed using the conducted test set-up shown in the diagram below.

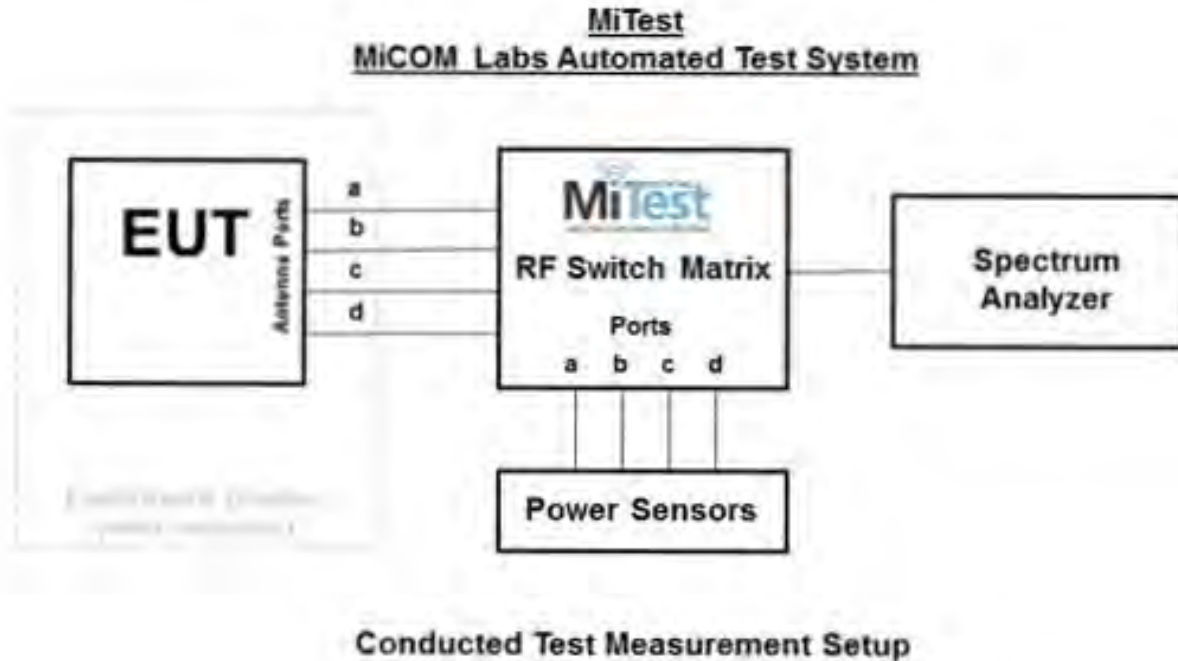

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
#3 SA	MiTest Box to SA	Fairview Microwave	SCA1814-0101-72	#3 SA	2 Jun 2017
#3P1	EUT to MiTest box port 1	Fairview Microwave	SCA1814-0101-72	#3P1	2 Jun 2017
#3P2	EUT to MiTest box port 2	Fairview Microwave	SCA1814-0101-72	#3P2	2 Jun 2017
#3P3	EUT to MiTest box port 3	Fairview Microwave	SCA1814-0101-72	#3P3	2 Jun 2017
#3P4	EUT to MiTest box port 4	Fairview Microwave	SCA1812-0101-72	#3P4	2 Jun 2017
158	Barometer/Thermometer	Control Company	4196	E2846	30 Nov 2017
249	Resistance Thermometer	Thermotronics	GR2105-02	9340 #2	23 Oct 2017
287	Rohde & Schwarz 40	Rhode &	ESIB40	100201	2 May 2018

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 17 of 189

	GHz Receiver	Schwarz			
361	Desktop for RF#1, Labview Software installed	Dell	Vostro 220	WS RF#1	Not Required
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	4 Aug 2017
390	USB Power Head 50MHz - 24GHz -60 to +20dBm	Agilent	U2002A	MY50000103	17 Oct 2017
398	MiTest RF Conducted Test Software	MiCOM	MiTest ATS	Version 4.1	Not Required
405	DC Power Supply 0-60V	Agilent	6654A	MY4001826	Cal when used
408	USB to GPIB interface	National Instruments	GPIB-USB HS	14C0DE9	Not Required
435	USB Wideband Power Sensor	Boonton	55006	8730	31 Jul 2017
436	USB Wideband Power Sensor	Boonton	55006	8731	14 Sep 2017
441	USB Wideband Power Sensor	Boonton	55006	9179	25 Sep 2017
443	4x4 RF Switch Box	MiCOM Labs	MiTest 4X4 RF Switch Box	MIC003	2 Jun 2017
445	PoE Injector	D-Link	DPE-101GL	QTAH1E2000625	Not Required
461	Spectrum Analyzer	Agilent	E4440A	MY46185537	13 Aug 2017
75	Environmental Chamber	Thermatron	SE-300-2-2	27946	24 Nov 2017

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.

7.2. Radiated Emissions - 3m Chamber

The following tests were performed using the radiated test set-up shown in the diagram below. Radiated emissions below 1GHz & Radiated Emissions above 1GHz.

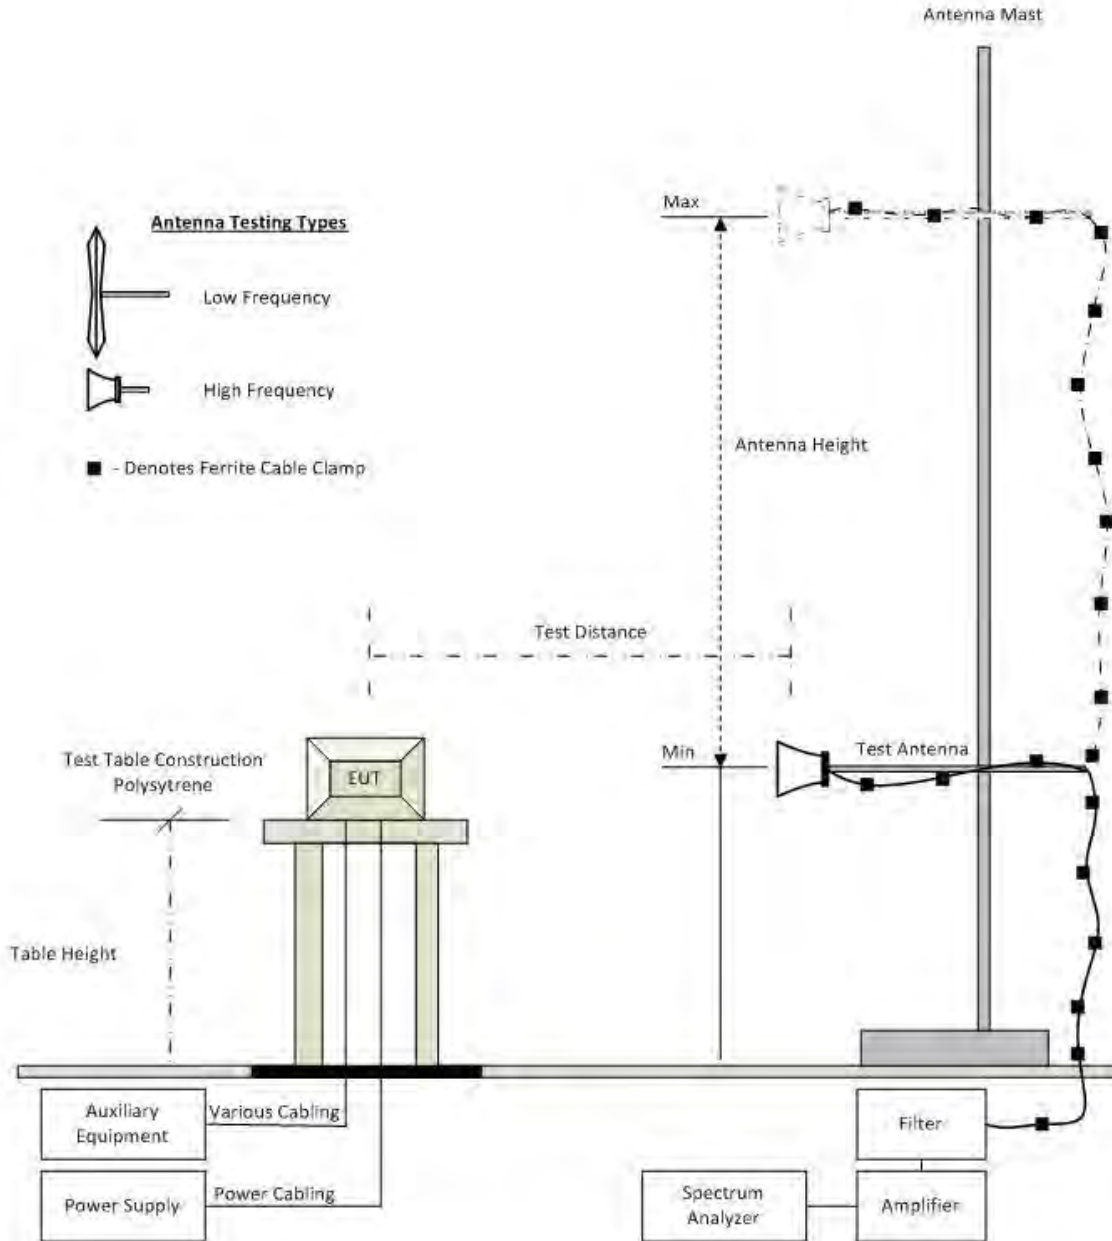

Radiated Emission Test Setup

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 19 of 189

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
158	Barometer/Thermometer	Control Company	4196	E2846	30 Nov 2017
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
287	Rohde & Schwarz 40 GHz Receiver	Rhode & Schwarz	ESIB40	100201	2 May 2018
330	Variac 0-280 Vac	Staco Energy Co	3PN1020B	0546	Cal when used
336	Active loop Ant 10kHz to 30 MHz	EMCO	EMCO 6502	00060498	26 Sep 2017
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	15 Aug 2017
373	26III RMS Multimeter	Fluke	Fluke 26 series III	76080720	26 Oct 2017
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	16 Aug 2017
378	Rohde & Schwarz 40 GHz Receiver with Generator	Rhode & Schwarz	ESIB40	100107/040	4 Aug 2017
396	2.4 GHz Notch Filter	Microtronics	BRM50701	001	16 Aug 2017
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	9 Jun 2017
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	10 Jul 2017
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	9 Jun 2017
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
414	DC Power Supply 0-60V	HP	6274	1029A01285	Cal when used
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	31 May 2017

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 20 of 189

463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	31 May 2017
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	31 May 2017
480	Cable - Bulkhead to Amp	SRC Haverhill	157-157-3050360	480	2 Jun 2017
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-151-3050787	481	2 Jun 2017
482	Cable - Amp to Antenna	SRC Haverhill	157-157-3051574	482	2 Jun 2017
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used
VLF-1700	Low pass filter DC-1700 MHz	Mini Circuits	VLF-1700	None	31 May 2017

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9. TEST RESULTS

9.1. Peak Transmit Power

Conducted Test Conditions for Maximum Conducted Output Power			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Maximum Conducted Output Power	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Maximum Conducted Output Power Measurement

Method PM (Measurement using an RF average power meter). KDB 789033 defines a methodology using an average wideband power meter. Measurements were made while the EUT was operating in a continuous transmission mode (100% duty cycle) at the appropriate center frequency. All operational modes and frequency bands were measured independently and the resultant calculated. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported separately. A summation (Σ) of each antenna port output power is provided which includes any offset due to Duty Cycle Correction Factor (DCCF). Testing was performed under ambient conditions at nominal voltage.

Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document. Supporting Information

Calculated Power = $A + G + Y + 10 \log (1/x)$ dBm

A = Total Power [$10 \cdot \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$]

G = Antenna Gain

Y = Beamforming Gain

x = Duty Cycle (average power measurements only)

Limits Maximum Conducted Output Power

Operating Frequency Band 5150-5250 MHz

15.407 (a)(1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 23 of 189

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Operating Frequency Band 5250-5350 and 5470 – 5725 MHz

15. 407 (a)(2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Operating Frequency Band 5725 – 5850 MHz

15. 407 (a)(3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 24 of 189

Equipment Configuration for Peak Transmit Power

Variant:	802.11a	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5260.0	16.65	16.35			19.51	29.820	24.00	-4.49	72.00
5300.0	16.13	15.85			19.00	34.629	24.00	-5.00	72.00
5320.0	14.74	14.54			17.65	34.709	24.00	-6.35	62.00

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 25 of 189

Variant:	802.11ac-80	Duty Cycle (%):	80.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5290.0	12.41	11.79			15.12	147.495	24.00	-8.88	53.00

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 26 of 189

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-20	Duty Cycle (%):	81.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5260.0	14.16	13.51			16.86	21.563	24.00	-7.14	72.00
5300.0	14.08	13.52			16.82	24.289	24.00	-7.18	72.00
5320.0	14.01	13.61			16.82	24.289	24.00	-7.18	72.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 27 of 189

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-40	Duty Cycle (%):	71.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5270.0	14.86	13.68			17.32	76.313	24.00	-6.68	72.00
5310.0	10.93	10.05			13.52	76.152	24.00	-10.48	56.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 28 of 189

Equipment Configuration for Peak Transmit Power

Variant:	802.11a	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5500.0	14.42	14.86			17.66	33.988	24.00	-6.34	62.00
5580.0	16.20	16.33			19.28	33.988	24.00	-4.72	72.00
5720.0	16.34	16.25			19.31	35.832	24.00	-4.69	72.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 29 of 189

Equipment Configuration for Peak Transmit Power

Variant:	802.11ac-80	Duty Cycle (%):	80.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5530.0	11.43	11.70			14.58	77.275	24.00	-9.42	63.00
5610.0	14.77	15.43			18.12	85.932	24.00	-5.88	72.00
5690.0	14.68	15.38			18.05	77.595	24.00	-5.95	72.00

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 30 of 189

Equipment Configuration for Peak Transmit Power

Variants:	802.11n HT-20	Duty Cycle (%):	81.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results									
Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5500.0	14.06	14.23			17.16	28.377	24.00	-6.84	72.00
5580.0	14.41	14.30			17.37	27.655	24.00	-6.63	72.00
5720.0	14.39	14.12			17.27	26.613	24.00	-6.73	72.00

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 31 of 189

Equipment Configuration for Peak Transmit Power

Variant:	802.11n HT-40	Duty Cycle (%):	89.8
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	3.00
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Conducted Output Power (dBm)				Calculated Total Power	Minimum 26 dB Bandwidth	Limit	Margin	EUT Power Setting
	Port(s)								
MHz	a	b	c	d	Σ Port(s) dBm	MHz	dBm	dB	
5510.0	15.01	14.43			17.74	41.042	24.00	-6.26	62.00
5550.0	14.75	14.60			17.69	40.721	24.00	-6.31	72.00
5710.0	14.74	14.46			17.61	43.607	24.00	-6.39	72.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 32 of 189

9.2. 26 dB & 99% Bandwidth

Conducted Test Conditions for 26 dB and 99% Bandwidth			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	26 dB and 99 % Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		
Test Procedure for 26 dB and 99% Bandwidth Measurement The bandwidth at 26 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. The Resolution Bandwidth was set to approximately 1% of the emission bandwidth. Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported. Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 33 of 189

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11a	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5260.0	33.667	29.820			33.667	29.820		
5300.0	34.709	34.629			34.709	34.629		
5320.0	34.870	34.709			34.870	34.709		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5260.0	17.555	17.395			17.555	17.395		
5300.0	18.838	18.758			18.838	18.758		
5320.0	19.158	18.597			19.158	18.597		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 34 of 189

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11ac-80	Duty Cycle (%):	82.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5290.0	147.495	147.495			147.495	147.495		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5290.0	76.954	76.633			76.954	76.633		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 35 of 189

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11n HT-20	Duty Cycle (%):	81.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5260.0	23.487	21.563			23.487	21.563		
5300.0	25.571	24.289			25.571	24.289		
5320.0	26.052	24.289			26.052	24.289		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5260.0	17.876	17.956			17.956	17.876		
5300.0	18.036	18.036			18.036	18.036		
5320.0	18.036	18.036			18.036	18.036		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 36 of 189

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11n HT-40	Duty Cycle (%):	71.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5270.0	77.916	76.313			77.916	76.313		
5310.0	76.152	76.313			76.313	76.152		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5270.0	43.768	41.363			43.768	41.363		
5310.0	40.882	39.599			40.882	39.599		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 37 of 189

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11a	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5500.0	35.431	33.988			35.431	33.988		
5580.0	33.988	34.870			34.870	33.988		
5720.0	35.912	35.832			35.912	35.832		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5500.0	17.876	17.956			17.956	17.876		
5580.0	18.838	19.399			19.399	18.838		
5720.0	19.399	20.681			20.681	19.399		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 38 of 189

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11ac-80	Duty Cycle (%):	63.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5530.0	150.060	154.870			154.870	150.060		
5610.0	154.549	79.679			154.549	79.679		
5690.0	152.625	155.190			155.190	152.625		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5530.0	77.275	80.160			80.160	77.275		
5610.0	85.932	100.040			100.040	85.932		
5690.0	77.595	83.046			83.046	77.595		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 39 of 189

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11n HT-20	Duty Cycle (%):	81.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5500.0	28.377	31.343			31.343	28.377		
5580.0	27.655	27.655			27.655	27.655		
5720.0	26.613	28.056			28.056	26.613		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5500.0	18.036	18.116			18.116	18.036		
5580.0	18.036	18.116			18.116	18.036		
5720.0	18.116	18.196			18.196	18.116		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 40 of 189

Equipment Configuration for 26 dB & 99% Occupied Bandwidth

Variant:	802.11n HT-40	Duty Cycle (%):	71.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 26 dB Bandwidth (MHz)				26 dB Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5510.0	76.313	76.633			76.633	76.313		
5550.0	76.313	76.473			76.473	76.313		
5710.0	76.633	77.595			77.595	76.633		

Test Frequency	Measured 99% Bandwidth (MHz)				99% Bandwidth (MHz)			
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
5510.0	41.042	43.607			43.607	41.042		
5550.0	40.721	42.485			42.485	40.721		
5710.0	43.607	48.577			48.577	43.607		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 41 of 189

9.3. Power Spectral Density

Conducted Test Conditions for Power Spectral Density			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Power Spectral Density	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (a)	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Power Spectral Density

The in-band power spectral density was measured using the test technique specified in KDB 789033. A 1 MHz measurement bandwidth was implemented for the analyzer sweep. Once the sweep is complete the analyzer trace data is downloaded and used for post processing purposes.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. The Peak Power Spectral Density is the highest level found across the emission bandwidth. With multiple antenna port measurements the numerical analyzer data from each port is summed (\hat{a}) and a link to this additional graphic is provided.

Test configuration and setup used for the measurement was per the Conducted Test Set-up section specified in this document.

Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with multiple transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were post processed and the resulting numerical and graphical data presented.

NOTE: It may be observed that spectrum in some plots break the limit line however this in itself does NOT constitute a failure. In all cases a spectrum summation plot is provided in order to prove compliance. A failure occurs only after the summation of all spectrum plots have been summed and are found to be greater than the limit line.

Supporting Information

Calculated Power = $A + 10 \log(1/x)$ dBm

A = Total Power Spectral Density [$10^x \text{Log}_{10}(10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$]

x = Duty Cycle

Limits Power Spectral Density

Operating Frequency Band 5150-5250 MHz

15.407 (a)(1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 42 of 189

frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Operating Frequency Band 5250-5350 and 5470 – 5725 MHz

15. 407 (a)(2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Operating Frequency Band 5725 – 5850 MHz

15. 407 (a)(3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 43 of 189

Equipment Configuration for Power Spectral Density

Variant:	802.11a	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5260.0	4.021	4.007			6.999	11.0	-4.0
5300.0	4.161	4.199			7.189	11.0	-3.8
5320.0	4.071	3.628			6.889	11.0	-4.1

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 44 of 189

Equipment Configuration for Power Spectral Density

Variant:	802.11ac-80	Duty Cycle (%):	82.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.86 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5290.0	-8.128	-14.864			-6.532	11.0	-17.5

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 45 of 189

Equipment Configuration for Power Spectral Density

Variant:	802.11n HT-20	Duty Cycle (%):	81.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.92 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5260.0	-1.231	-2.989			0.997	11.0	-10.0
5300.0	-1.356	-1.221			1.547	11.0	-9.5
5320.0	-1.054	-2.352			0.698	11.0	-10.3

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 46 of 189

Equipment Configuration for Power Spectral Density

Variant:	802.11n HT-40	Duty Cycle (%):	71.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+1.49 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5270.0	-7.255	-8.312			-4.483	11.0	-15.5
5310.0	-6.021	-8.859			-3.185	11.0	-14.2

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 47 of 189

Equipment Configuration for Power Spectral Density

Variant:	802.11a	Duty Cycle (%):	99.0
Data Rate:	6.00 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.04 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5500.0	5.808	5.868			8.569	11.0	-2.4
5580.0	4.220	4.724			7.166	11.0	-3.8
5720.0	2.924	3.098			5.991	11.0	-5.0

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 48 of 189

Equipment Configuration for Power Spectral Density

Variant:	802.11ac-80	Duty Cycle (%):	63.0
Data Rate:	29.30 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+2.01 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5530.0	-12.902	-14.593			-10.048	11.0	-21.1
5610.0	-14.727	-13.339			-9.880	11.0	-20.9
5690.0	-5.863	-12.801			-3.421	11.0	-14.4

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 49 of 189

Equipment Configuration for Power Spectral Density

Variant:	802.11n HT-20	Duty Cycle (%):	81.0
Data Rate:	6.50 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+0.92 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5500.0	-1.135	-0.924			2.416	11.0	-8.6
5580.0	-1.362	-2.806			1.396	11.0	-9.6
5720.0	-0.937	-3.856			1.119	11.0	-9.9

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 50 of 189

Equipment Configuration for Power Spectral Density

Variant:	802.11n HT-40	Duty Cycle (%):	71.0
Data Rate:	13.50 MBit/s	Antenna Gain (dBi):	2.90
Modulation:	OFDM	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	SB
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Power Spectral Density				Summation Peak Marker + DCCF (+1.49 dB)	Limit	Margin
	Port(s) (dBm/MHz)						
MHz	a	b	c	d	dBm/MHz	dBm/MHz	dB
5510.0	-6.553	-5.521			-1.865	11.0	-12.9
5550.0	-5.381	-5.965			-2.346	11.0	-13.4
5710.0	-8.868	-9.524			-5.455	11.0	-16.5

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	2.81 dB

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 51 of 189

9.4. Radiated

Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47:15.407	Ambient Temp. (°C):	20.0 - 24.5
Test Heading:	Radiated Spurious and Band-Edge Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.407 (b), 15.205, 15.209	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Radiated Spurious and Band-Edge Emissions

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Undesirable Measurement were per the Radiated Test Set-up specified in this document.

15.407 (b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

Limits for Restricted Bands (15.205, 15.209)

Peak emission: 74 dBuV/m

Average emission: 54 dBuV/m

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 52 of 189

FS = Field Strength
R = Measured Spectrum analyzer Input Amplitude
AF = Antenna Factor
CORR = Correction Factor = CL – AG + NFL
CL = Cable Loss
AG = Amplifier Gain
FO = Distance Falloff Factor
NFL = Notch Filter Loss

Example:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dBµV/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz equates to 68.23 dBuV/m

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:
 Level (dBmV/m) = 20 * Log (level (mV/m))

40 dBmV/m = 100 mV/m
 48 dBmV/m = 250 mV/m

Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 53 of 189

13.36-13.41			
<p>(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.</p> <p>(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.</p> <p>(d) The following devices are exempt from the requirements of this section:</p> <ul style="list-style-type: none">(1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.(2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.(3) Cable locating equipment operated pursuant to §15.213.(4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.(5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.(6) Transmitters operating under the provisions of subparts D or F of this part.(7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.(8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a). <p>(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).</p>			

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 54 of 189

9.4.1. TX Spurious & Restricted Band Emissions

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	HPE Metal Sheet	Variant:	802.11a
Antenna Gain (dBi):	2.90	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5260.00	Data Rate:	6.00 MBit/s
Power Setting:	72	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5261.44	72.32	3.66	-11.29	64.69	Fundamental	Horizontal	100	0	--	--	
#2	10519.94	50.02	5.43	-4.21	51.24	Peak (NRB)	Vertical	151	7	--	--	Pass

Test Notes: APINP203 SN# CNCPK2T00L on 150cm table powered by AC.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 55 of 189

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	HPE Metal Sheet	Variant:	802.11a
Antenna Gain (dBi):	2.90	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5300.00	Data Rate:	6.00 MBit/s
Power Setting:	72	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5295.84	73.38	3.79	-11.11	66.06	Fundamental	Horizontal	100	0	--	--	
#2	10604.94	55.48	5.56	-3.92	57.12	Max Peak	Horizontal	185	193	74.0	-16.9	Pass
#3	10604.94	41.15	5.56	-3.92	42.79	Max Avg	Horizontal	185	193	54.0	-11.2	Pass

Test Notes: APINP203 SN# CNCPK2T00L on 150cm table powered by AC.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 56 of 189

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	HPE Metal Sheet	Variant:	802.11a
Antenna Gain (dBi):	2.90	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5320.00	Data Rate:	6.00 MBit/s
Power Setting:	72	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5323.73	72.98	3.74	-11.06	65.66	Fundamental	Horizontal	100	0	--	--	
#2	10640.33	51.07	5.39	-3.89	52.57	Max Peak	Vertical	98	18	74.0	-21.4	Pass
#3	10640.33	37.71	5.39	-3.89	39.21	Max Avg	Vertical	98	18	54.0	-14.8	Pass

Test Notes: APINP203 SN# CNCPK2T00L on 150cm table powered by AC.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 57 of 189

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	HPE Metal Sheet	Variant:	802.11a
Antenna Gain (dBi):	2.90	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5500.00	Data Rate:	6.00 MBit/s
Power Setting:	72	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
#1	5504.21	62.41	3.75	-11.18	54.98	Fundamental	Horizontal	100	0	--	--	
#2	10995.83	51.77	5.60	-4.26	53.11	Max Peak	Vertical	155	267	74.0	-20.9	Pass
#3	10995.83	38.37	5.60	-4.26	39.71	Max Avg	Vertical	155	267	54.0	-14.3	Pass

Test Notes: APINP203 SN# CNCPK2T00L on 150cm table powered by AC.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 58 of 189

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	HPE Metal Sheet	Variant:	802.11a
Antenna Gain (dBi):	2.90	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5580.00	Data Rate:	6.00 MBit/s
Power Setting:	72	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5576.21	69.56	3.81	-11.21	62.16	Fundamental	Horizontal	100	0	--	--	
#2	11157.98	50.94	5.94	-4.06	52.82	Max Peak	Vertical	140	357	74.0	-21.2	Pass
#3	11157.98	37.39	5.94	-4.06	39.27	Max Avg	Vertical	140	357	54.0	-14.7	Pass

Test Notes: APINP203 SN# CNCPK2T00L on 150cm table powered by AC.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 59 of 189

Equipment Configuration for TX Spurious & Restricted Band Emissions

Antenna:	HPE Metal Sheet	Variant:	802.11a
Antenna Gain (dBi):	2.90	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5720.00	Data Rate:	6.00 MBit/s
Power Setting:	72	Tested By:	JMH

Test Measurement Results

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5715.24	59.08	3.81	-10.76	52.13	Fundamental	Vertical	100	0	--	--	
#2	11439.80	55.80	5.35	-4.93	56.22	Max Peak	Horizontal	187	304	74.0	-17.8	Pass
#3	11439.80	44.98	5.35	-4.93	45.40	Max Avg	Horizontal	187	304	54.0	-8.6	Pass

Test Notes: APINP203 SN# CNCPK2T00L on 150cm table powered by AC.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



9.4.2. Restricted Edge & Band-Edge Emissions

RESULTS SUMMARY FOR RADIATED BAND-EDGE EMISSIONS

5250 - 5350 MHz

HPE Metal Sheet		Band-Edge Freq	Limit 74.0dB μ V/m	Limit 54.0dB μ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB μ V/m	dB μ V/m	
802.11a	5320.00	5350.00	73.89	53.08	62
802.11ac-80	5290.00	5350.00	73.74	48.74	53
802.11n HT-20	5320.00	5350.00	70.72	52.44	72
802.11n HT-40	5310.00	5350.00	72.94	51.74	56

5470 - 5725 MHz

HPE Metal Sheet		Restricted-Edge Freq	Limit 74.0dB μ V/m	Limit 54.0dB μ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB μ V/m	dB μ V/m	
802.11a	5500.00	5460.00	72.63	53.88	62
802.11ac-80	5530.00	5460.00	72.51	50.63	63
802.11n HT-20	5500.00	5460.00	71.55	52.89	72
802.11n HT-40	5510.00	5460.00	73.35	52.01	62

HPE Metal Sheet		Band-Edge Freq	Limit 68.23dB μ V/m	Power Setting
Operational Mode	Operating Frequency (MHz)	MHz	dB μ V/m	
802.11a	5500.00	5470.00	58.15	62
802.11ac-80	5530.00	5470.00	52.46	63
802.11n HT-20	5500.00	5470.00	56.59	72
802.11n HT-40	5510.00	5470.00	56.86	62

Click on the links to view the data.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 61 of 189

Equipment Configuration for Restricted Upper Band-Edge Emissions

Antenna:	HPE Metal Sheet	Variant:	802.11a
Antenna Gain (dBi):	2.90	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5320.00	Data Rate:	6.00 MBit/s
Power Setting:	62	Tested By:	JMH

Test Measurement Results

5300.00 - 5460.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#2	5351.28	14.86	3.71	34.51	53.08	Max Avg	Horizontal	169	353	54.0	-0.9	Pass
#3	5352.57	35.68	3.71	34.50	73.89	Max Peak	Horizontal	169	353	74.0	-0.1	Pass
#1	5350.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: EUT APINP203 SN# CNCPK2T00L on 150cm table powered by AC. Power reduced to 62 to meet band edge limits.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 62 of 189

Equipment Configuration for Restricted Upper Band-Edge Emissions

Antenna:	HPE Metal Sheet	Variant:	802.11ac-80
Antenna Gain (dBi):	2.90	Modulation:	OFDM
Beam Forming Gain (Y):	3.00	Duty Cycle (%):	99
Channel Frequency (MHz):	5290.00	Data Rate:	29.30 MBit/s
Power Setting:	53	Tested By:	JMH

Test Measurement Results

5300.00 - 5460.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#2	5362.18	10.56	3.70	34.48	48.74	Max Avg	Horizontal	169	353	54.0	-5.3	Pass
#3	5366.03	35.58	3.69	34.47	73.74	Max Peak	Horizontal	169	353	74.0	-0.3	Pass
#1	5350.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: EUT APINP203 SN# CNCPK2T00L on 150cm table powered by AC. Power reduced to 53 to meet band edge limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 63 of 189

Equipment Configuration for Restricted Upper Band-Edge Emissions

Antenna:	HPE Metal Sheet	Variant:	802.11n HT-20
Antenna Gain (dBi):	2.90	Modulation:	OFDM
Beam Forming Gain (Y):	3.00	Duty Cycle (%):	99
Channel Frequency (MHz):	5320.00	Data Rate:	6.50 MBit/s
Power Setting:	72	Tested By:	JMH

Test Measurement Results

5300.00 - 5460.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5350.00	14.23	3.70	34.51	52.44	Max Avg	Horizontal	169	353	54.0	-1.6	Pass
#3	5351.60	32.50	3.71	34.51	70.72	Max Peak	Horizontal	169	353	74.0	-3.3	Pass
#2	5350.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: EUT APINP203 SN# CNCPK2T00L on 150cm table powered by AC.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 64 of 189

Equipment Configuration for Restricted Upper Band-Edge Emissions

Antenna:	HPE Metal Sheet	Variant:	802.11n HT-40
Antenna Gain (dBi):	2.90	Modulation:	OFDM
Beam Forming Gain (Y):	3.00	Duty Cycle (%):	99
Channel Frequency (MHz):	5310.00	Data Rate:	13.50 MBit/s
Power Setting:	56	Tested By:	JMH

Test Measurement Results

5300.00 - 5460.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#2	5350.64	13.52	3.71	34.51	51.74	Max Avg	Horizontal	169	353	54.0	-2.3	Pass
#3	5356.09	34.73	3.71	34.50	72.94	Max Peak	Horizontal	169	353	74.0	-1.1	Pass
#1	5350.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: EUT APINP203 SN# CNCPK2T00L on 150cm table powered by AC. Power reduced to 56 to meet band edge limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 65 of 189

Equipment Configuration for Restricted Lower Band-Edge Emissions

Antenna:	HPE Metal Sheet	Variant:	802.11a
Antenna Gain (dBi):	2.90	Modulation:	OFDM
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	5500.00	Data Rate:	6.00 MBit/s
Power Setting:	62	Tested By:	JMH

Test Measurement Results

5350.00 - 5500.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5460.00	15.78	3.79	34.31	53.88	Max Avg	Horizontal	163	354	54.0	-0.1	Pass
#2	5460.00	34.53	3.79	34.31	72.63	Max Peak	Horizontal	163	354	74.0	-1.4	Pass
#4	5470.00	20.07	3.76	34.32	58.15	Max Avg	Horizontal	163	354	68.2	-10.1	Pass
#3	5460.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--
#5	5470.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT APINP203 SN# CNCPK2T00L on 150cm table powered by AC. Power reduced to 62 to meet band edge limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 66 of 189

Equipment Configuration for Restricted Lower Band-Edge Emissions

Antenna:	HPE Metal Sheet	Variant:	802.11ac-80
Antenna Gain (dBi):	2.90	Modulation:	OFDM
Beam Forming Gain (Y):	3.00	Duty Cycle (%):	99
Channel Frequency (MHz):	5530.00	Data Rate:	29.30 MBit/s
Power Setting:	63	Tested By:	JMH

Test Measurement Results

5350.00 - 5500.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5454.59	34.42	3.79	34.30	72.51	Max Peak	Horizontal	163	354	74.0	-1.5	Pass
#2	5460.00	12.53	3.79	34.31	50.63	Max Avg	Horizontal	163	354	54.0	-3.4	Pass
#4	5466.39	14.38	3.77	34.31	52.46	Max Avg	Horizontal	163	354	68.2	-15.7	Pass
#3	5460.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--
#5	5470.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT APINP203 SN# CNCPK2T00L on 150cm table powered by AC. Power reduced to 63 to meet band edge limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 67 of 189

Equipment Configuration for Restricted Lower Band-Edge Emissions

Antenna:	HPE Metal Sheet	Variant:	802.11n HT-20
Antenna Gain (dBi):	2.90	Modulation:	OFDM
Beam Forming Gain (Y):	3.00	Duty Cycle (%):	99
Channel Frequency (MHz):	5500.00	Data Rate:	6.50 MBit/s
Power Setting:	72	Tested By:	JMH

Test Measurement Results

5350.00 - 5500.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5455.49	33.46	3.79	34.30	71.55	Max Peak	Horizontal	163	354	74.0	-2.5	Pass
#2	5460.00	14.79	3.79	34.31	52.89	Max Avg	Horizontal	163	354	54.0	-1.1	Pass
#4	5467.90	18.51	3.76	34.32	56.59	Max Avg	Horizontal	163	354	68.2	-11.6	Pass
#3	5460.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--
#5	5470.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT APINP203 SN# CNCPK2T00L on 150cm table powered by AC.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 68 of 189

Equipment Configuration for Restricted Lower Band-Edge Emissions

Antenna:	HPE Metal Sheet	Variant:	802.11n HT-40
Antenna Gain (dBi):	2.90	Modulation:	OFDM
Beam Forming Gain (Y):	3.00	Duty Cycle (%):	99
Channel Frequency (MHz):	5510.00	Data Rate:	13.50 MBit/s
Power Setting:	62	Tested By:	JMH

Test Measurement Results

5350.00 - 5500.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
#1	5452.18	35.27	3.78	34.30	73.35	Max Peak	Horizontal	163	354	74.0	-0.7	Pass
#2	5457.90	13.91	3.80	34.30	52.01	Max Avg	Horizontal	163	354	54.0	-2.0	Pass
#4	5467.60	18.78	3.76	34.32	56.86	Max Avg	Horizontal	163	354	68.2	-11.3	Pass
#3	5460.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--
#5	5470.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT APINP203 SN# CNCPK2T00L on 150cm table powered by AC. Power reduced to 62 to meet band edge limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 69 of 189

A. APPENDIX - GRAPHICAL IMAGES

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




A.1. 26 dB & 99% Bandwidth



26 dB & 99% BANDWIDTH

Variante: 802.11a, Channel: 5260.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

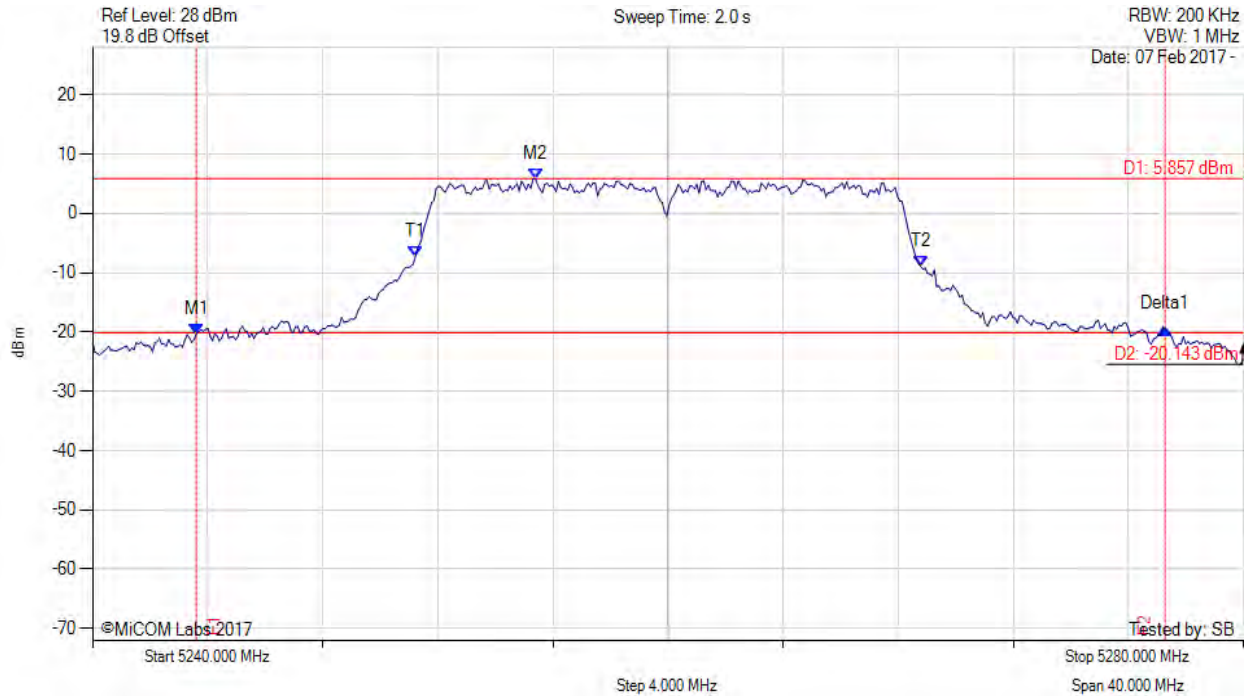

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5243.607 MHz : -20.426 dBm M2 : 5255.391 MHz : 5.857 dBm Delta1 : 33.667 MHz : 0.964 dB T1 : 5251.222 MHz : -7.296 dBm T2 : 5268.778 MHz : -8.931 dBm OBW : 17.555 MHz	Measured 26 dB Bandwidth: 33.667 MHz Measured 99% Bandwidth: 17.555 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 71 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5260.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

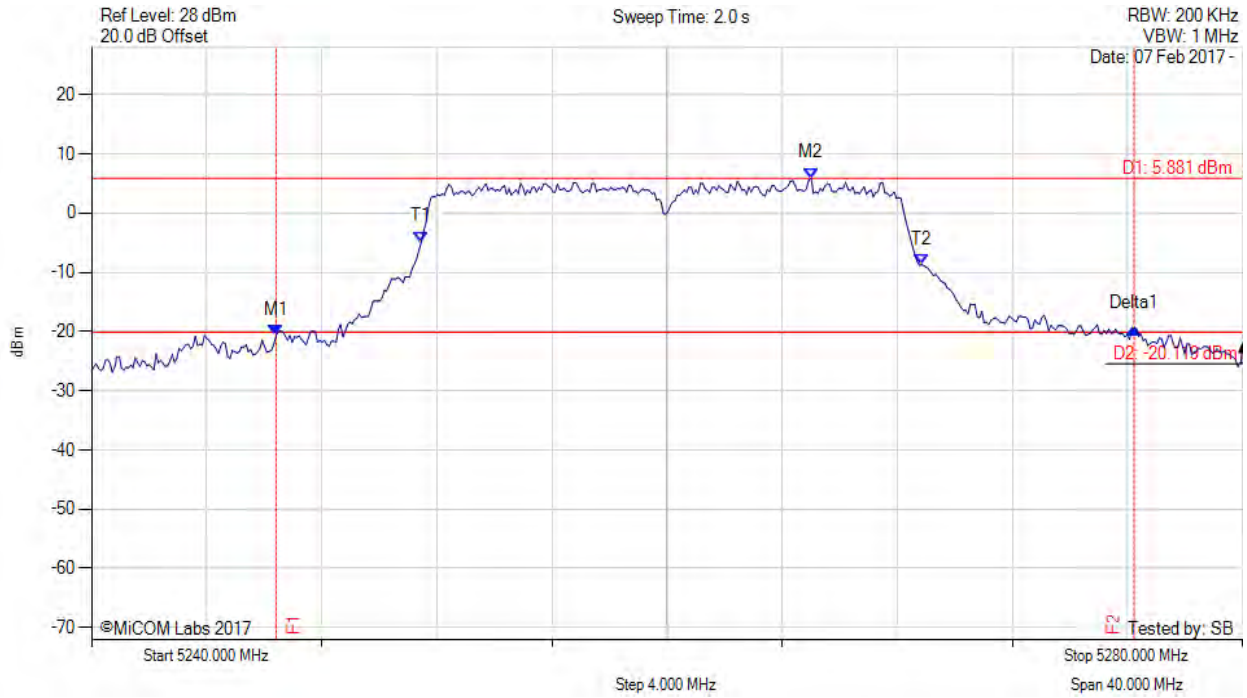

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5246.413 MHz : -20.692 dBm M2 : 5265.010 MHz : 5.881 dBm Delta1 : 29.820 MHz : 1.198 dB T1 : 5251.463 MHz : -4.861 dBm T2 : 5268.858 MHz : -8.731 dBm OBW : 17.395 MHz	Measured 26 dB Bandwidth: 29.820 MHz Measured 99% Bandwidth: 17.395 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 72 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5300.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

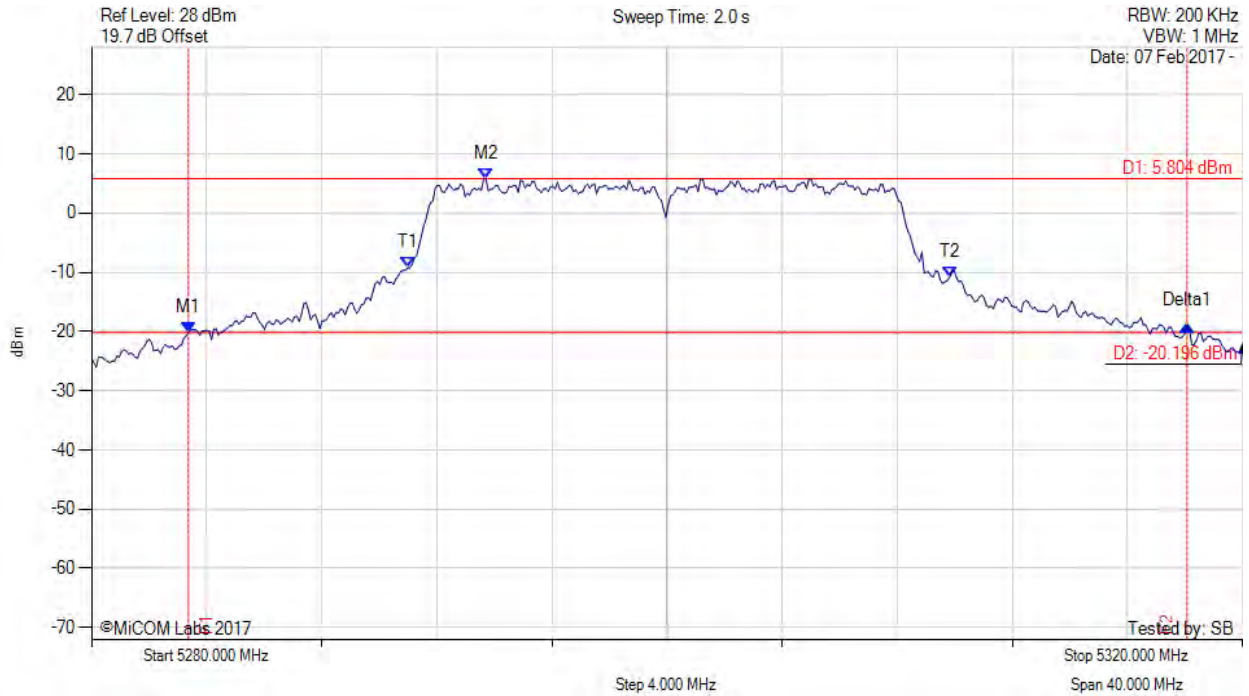

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5283.367 MHz : -20.212 dBm M2 : 5293.707 MHz : 5.804 dBm Delta1 : 34.709 MHz : 1.163 dB T1 : 5290.982 MHz : -9.279 dBm T2 : 5309.820 MHz : -10.804 dBm OBW : 18.838 MHz	Measured 26 dB Bandwidth: 34.709 MHz Measured 99% Bandwidth: 18.838 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 73 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5300.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

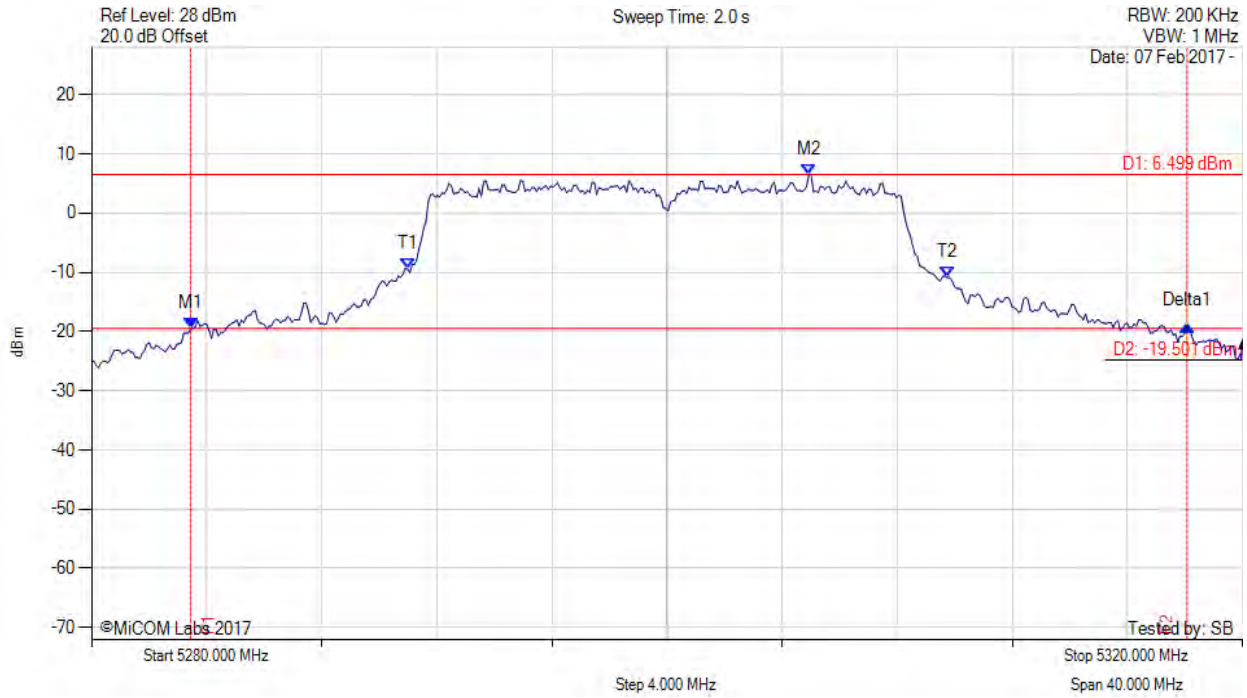

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5283.447 MHz : -19.549 dBm M2 : 5304.930 MHz : 6.499 dBm Delta1 : 34.629 MHz : 0.545 dB T1 : 5290.982 MHz : -9.474 dBm T2 : 5309.739 MHz : -10.918 dBm OBW : 18.758 MHz	Measured 26 dB Bandwidth: 34.629 MHz Measured 99% Bandwidth: 18.758 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 74 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5320.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

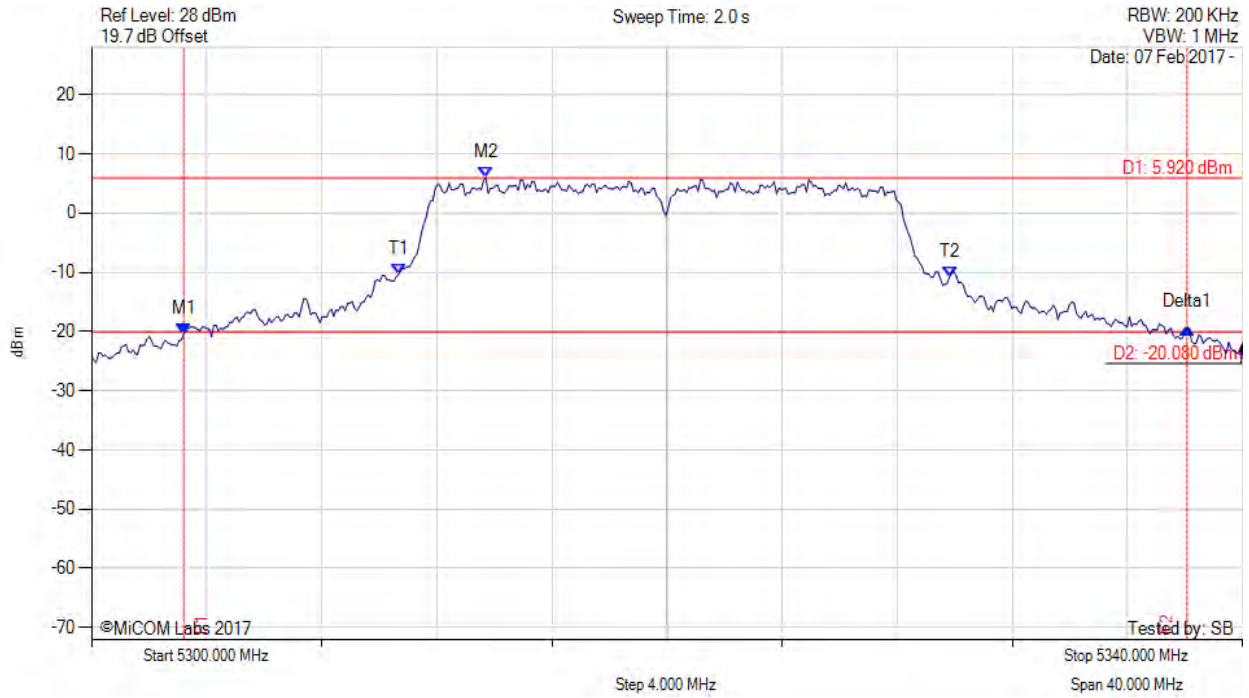

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5303.206 MHz : -20.360 dBm M2 : 5313.707 MHz : 5.920 dBm Delta1 : 34.870 MHz : 1.007 dB T1 : 5310.661 MHz : -10.428 dBm T2 : 5329.820 MHz : -10.765 dBm OBW : 19.158 MHz	Measured 26 dB Bandwidth: 34.870 MHz Measured 99% Bandwidth: 19.158 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 75 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5320.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

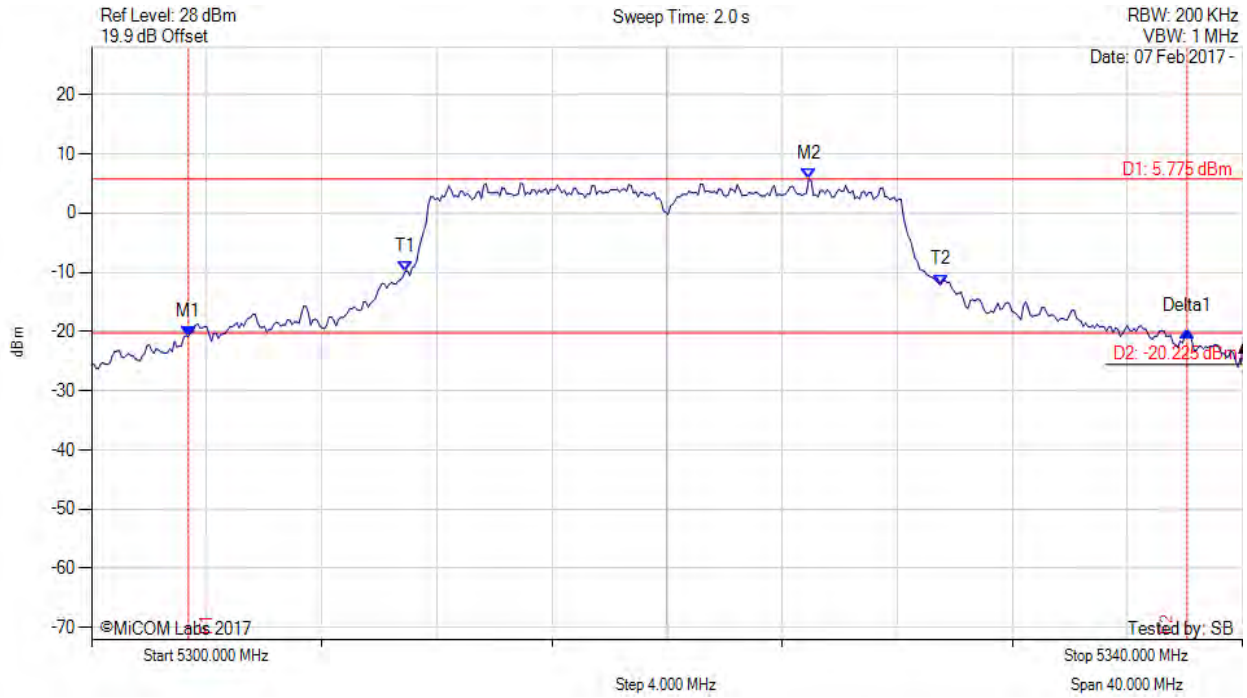

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5303.367 MHz : -20.826 dBm M2 : 5324.930 MHz : 5.775 dBm Delta1 : 34.709 MHz : 0.805 dB T1 : 5310.902 MHz : -9.852 dBm T2 : 5329.499 MHz : -12.120 dBm OBW : 18.597 MHz	Measured 26 dB Bandwidth: 34.709 MHz Measured 99% Bandwidth: 18.597 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 76 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

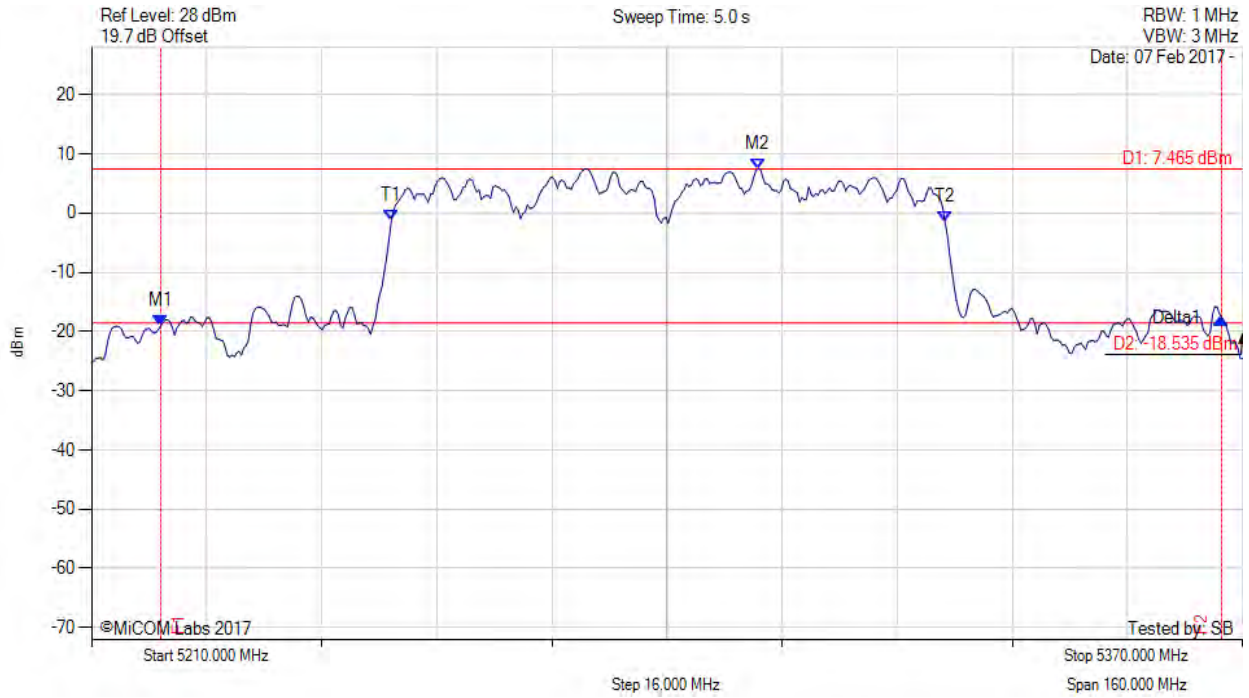

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5219.619 MHz : -19.022 dBm M2 : 5302.665 MHz : 7.465 dBm Delta1 : 147.495 MHz : 1.310 dB T1 : 5251.683 MHz : -1.286 dBm T2 : 5328.637 MHz : -1.422 dBm OBW : 76.954 MHz	Measured 26 dB Bandwidth: 147.495 MHz Measured 99% Bandwidth: 76.954 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 77 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

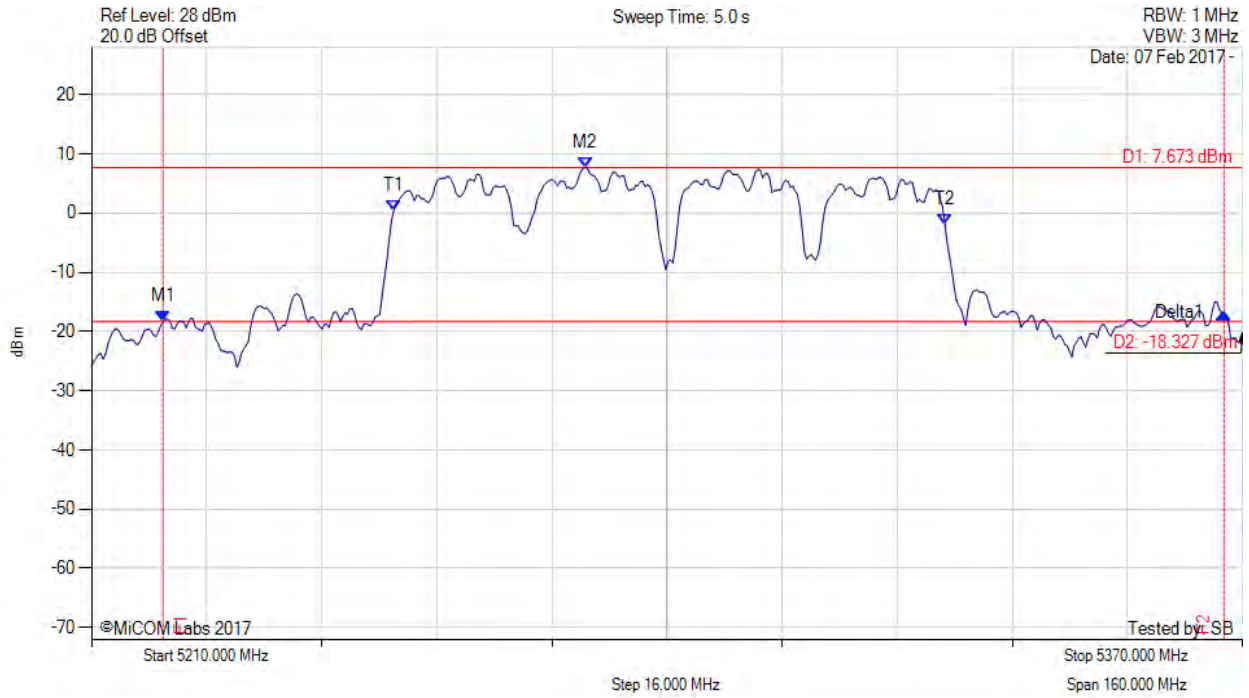

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5219.940 MHz : -18.335 dBm M2 : 5278.617 MHz : 7.673 dBm Delta1 : 147.495 MHz : 1.489 dB T1 : 5252.004 MHz : 0.426 dBm T2 : 5328.637 MHz : -1.861 dBm OBW : 76.633 MHz	Measured 26 dB Bandwidth: 147.495 MHz Measured 99% Bandwidth: 76.633 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 78 of 189

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

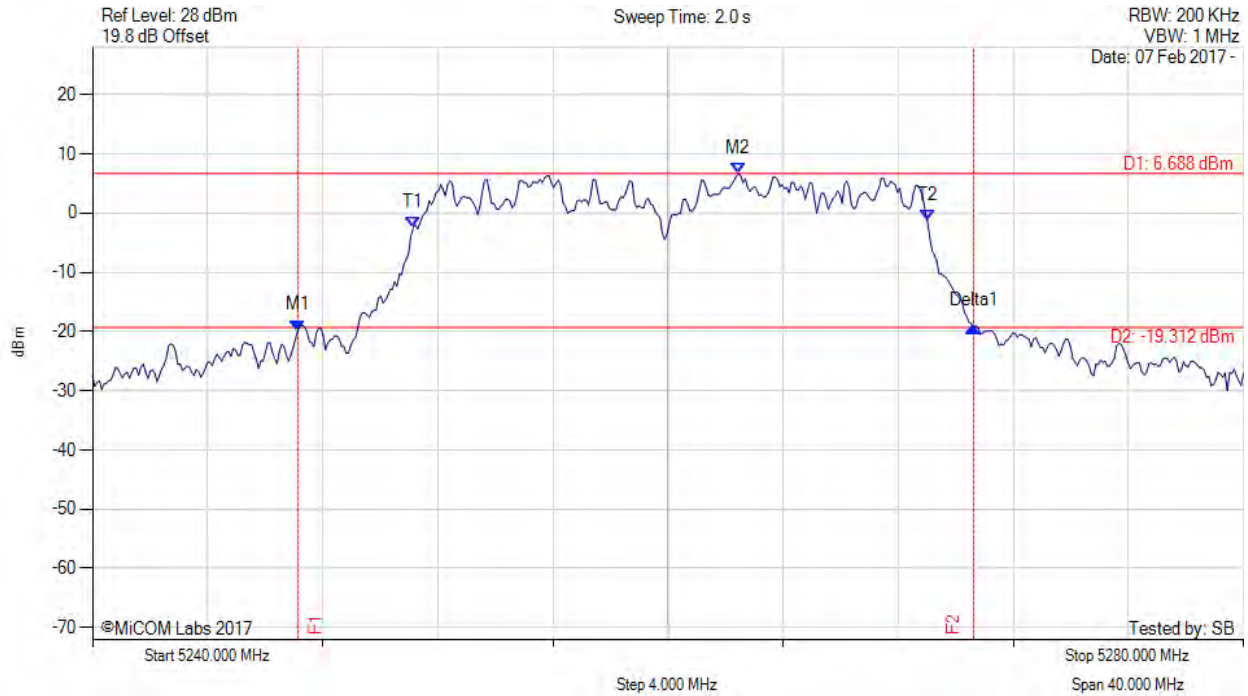

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5247.134 MHz : -19.826 dBm M2 : 5262.445 MHz : 6.688 dBm Delta1 : 23.487 MHz : 0.694 dB T1 : 5251.142 MHz : -2.500 dBm T2 : 5269.018 MHz : -1.321 dBm OBW : 17.876 MHz	Measured 26 dB Bandwidth: 23.487 MHz Measured 99% Bandwidth: 17.876 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 79 of 189

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

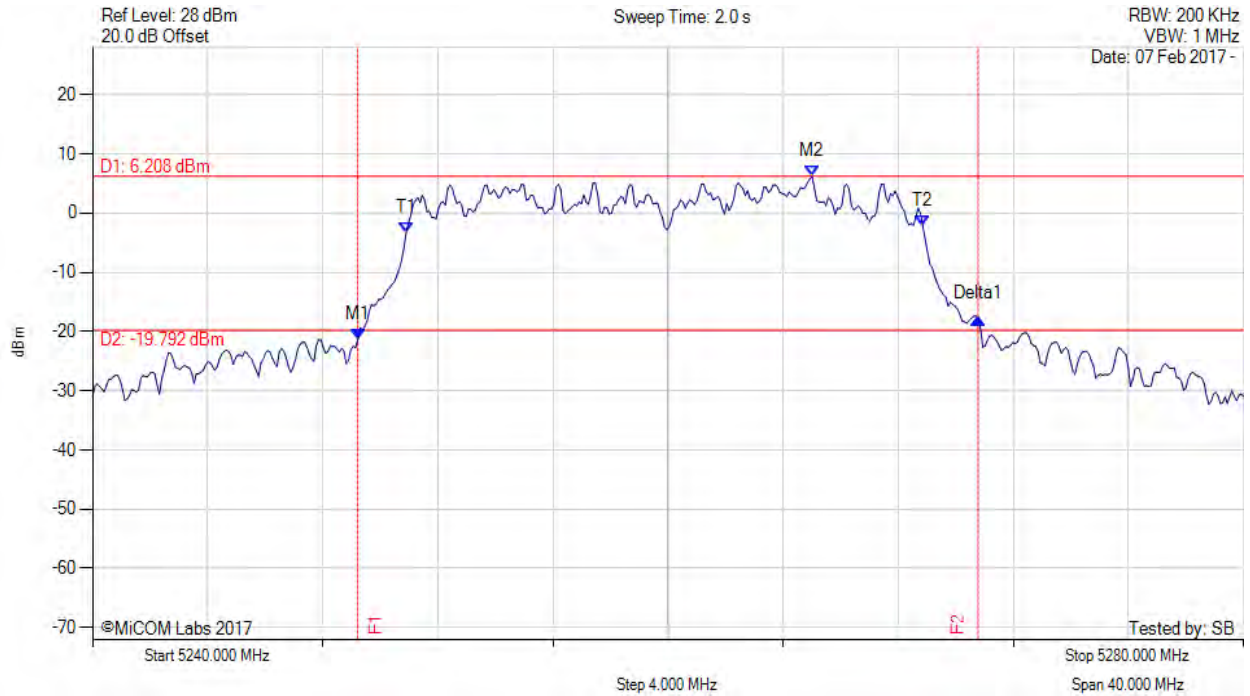

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5249.218 MHz : -21.367 dBm M2 : 5265.010 MHz : 6.208 dBm Delta1 : 21.563 MHz : 3.594 dB T1 : 5250.902 MHz : -3.326 dBm T2 : 5268.858 MHz : -2.171 dBm OBW : 17.956 MHz	Measured 26 dB Bandwidth: 21.563 MHz Measured 99% Bandwidth: 17.956 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 80 of 189

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

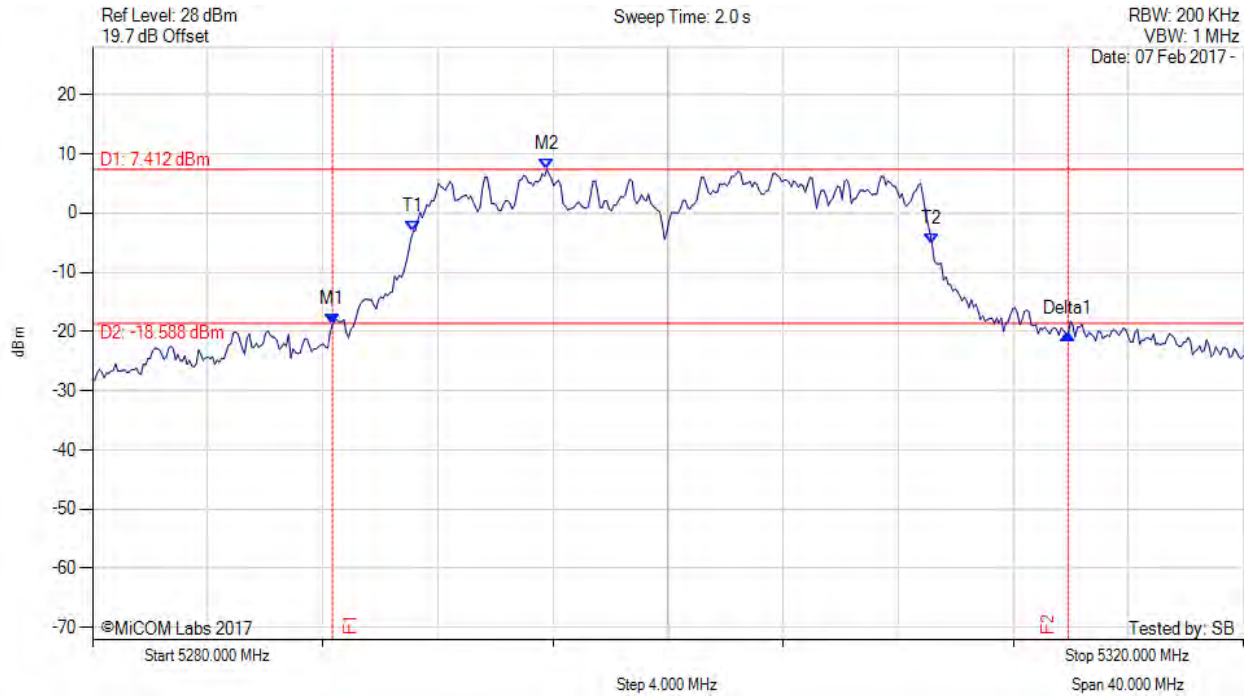

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5288.337 MHz : -18.860 dBm M2 : 5295.792 MHz : 7.412 dBm Delta1 : 25.571 MHz : -1.635 dB T1 : 5291.142 MHz : -3.143 dBm T2 : 5309.178 MHz : -5.276 dBm OBW : 18.036 MHz	Measured 26 dB Bandwidth: 25.571 MHz Measured 99% Bandwidth: 18.036 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 81 of 189

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

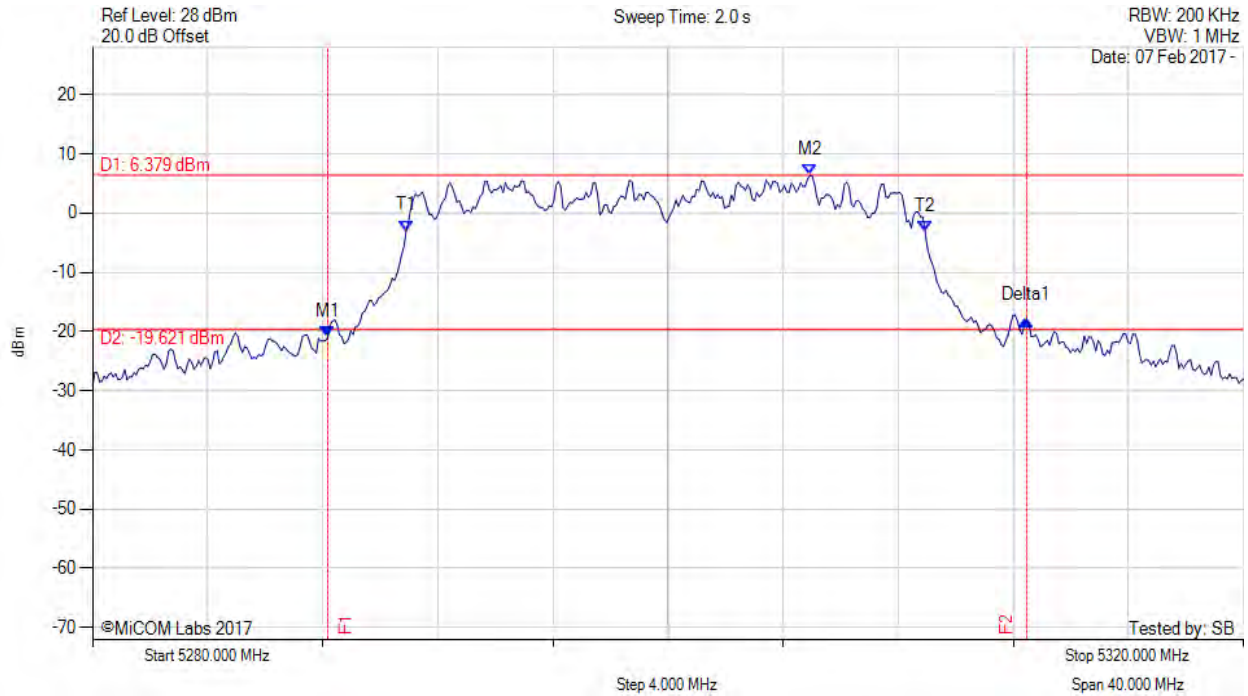

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5288.176 MHz : -20.934 dBm M2 : 5304.930 MHz : 6.379 dBm Delta1 : 24.289 MHz : 2.803 dB T1 : 5290.902 MHz : -2.982 dBm T2 : 5308.938 MHz : -3.169 dBm OBW : 18.036 MHz	Measured 26 dB Bandwidth: 24.289 MHz Measured 99% Bandwidth: 18.036 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 82 of 189

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

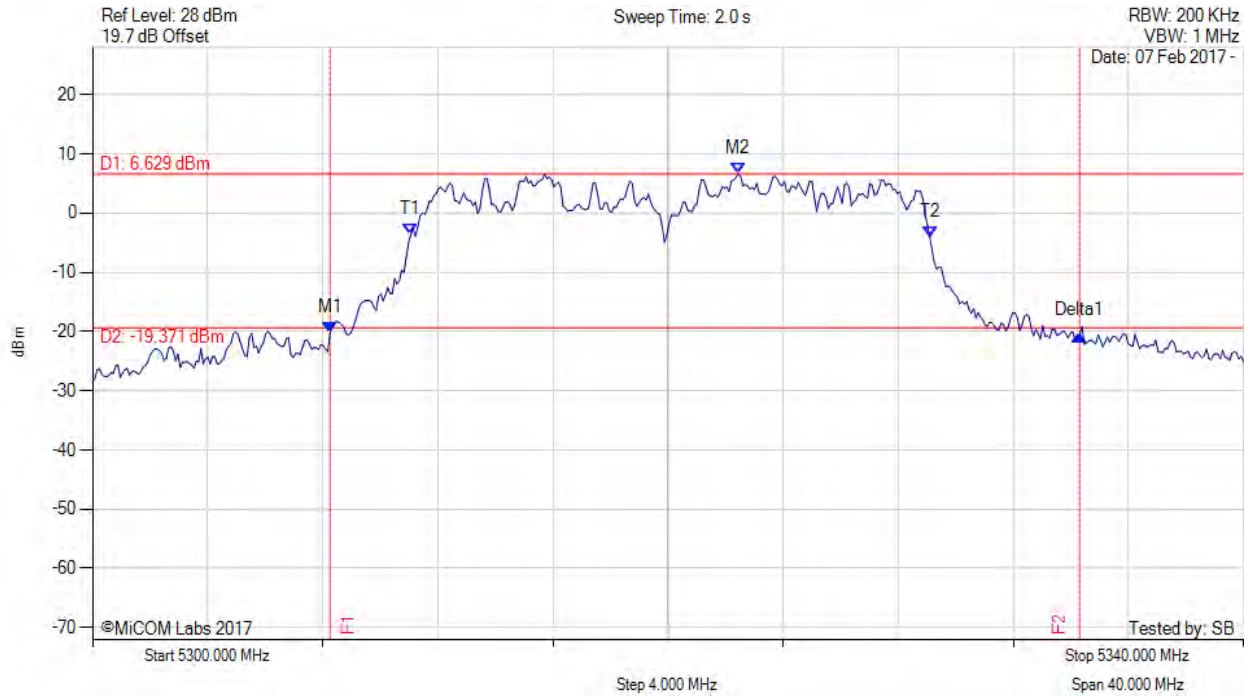

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5308.257 MHz : -20.261 dBm M2 : 5322.445 MHz : 6.629 dBm Delta1 : 26.052 MHz : -0.311 dB T1 : 5311.062 MHz : -3.669 dBm T2 : 5329.098 MHz : -4.003 dBm OBW : 18.036 MHz	Measured 26 dB Bandwidth: 26.052 MHz Measured 99% Bandwidth: 18.036 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 83 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

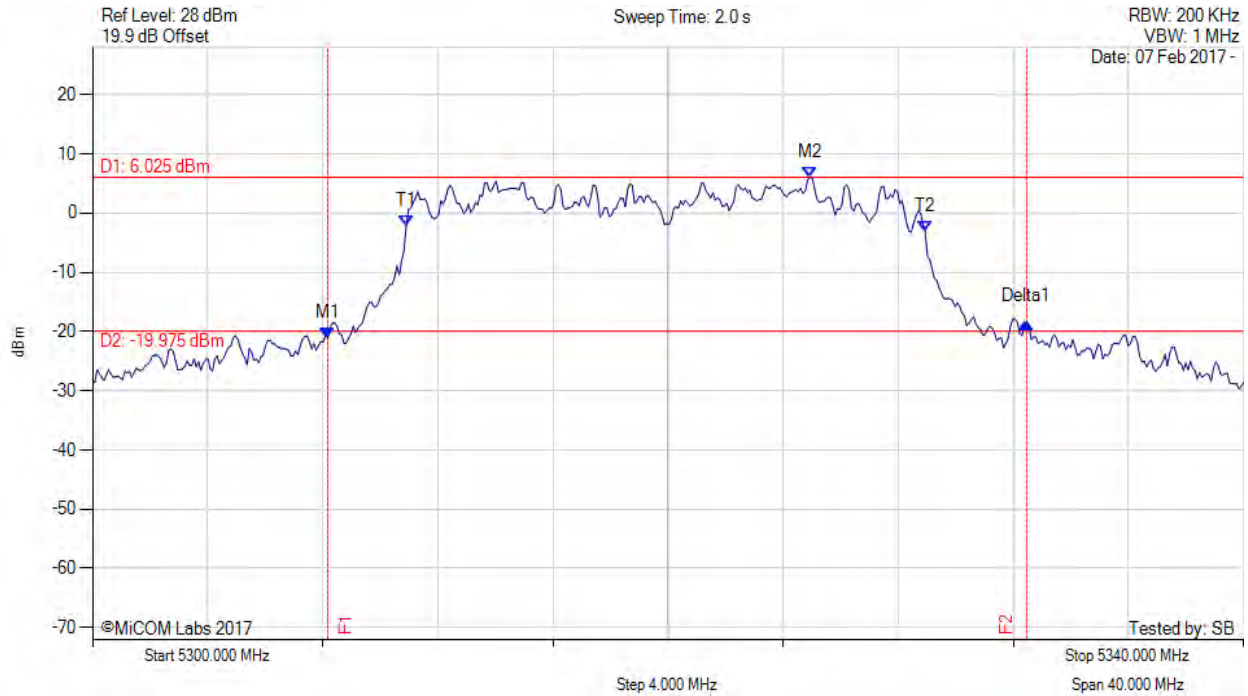

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5308.176 MHz : -21.107 dBm M2 : 5324.930 MHz : 6.025 dBm Delta1 : 24.289 MHz : 2.691 dB T1 : 5310.902 MHz : -2.223 dBm T2 : 5328.938 MHz : -3.086 dBm OBW : 18.036 MHz	Measured 26 dB Bandwidth: 24.289 MHz Measured 99% Bandwidth: 18.036 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 84 of 189

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

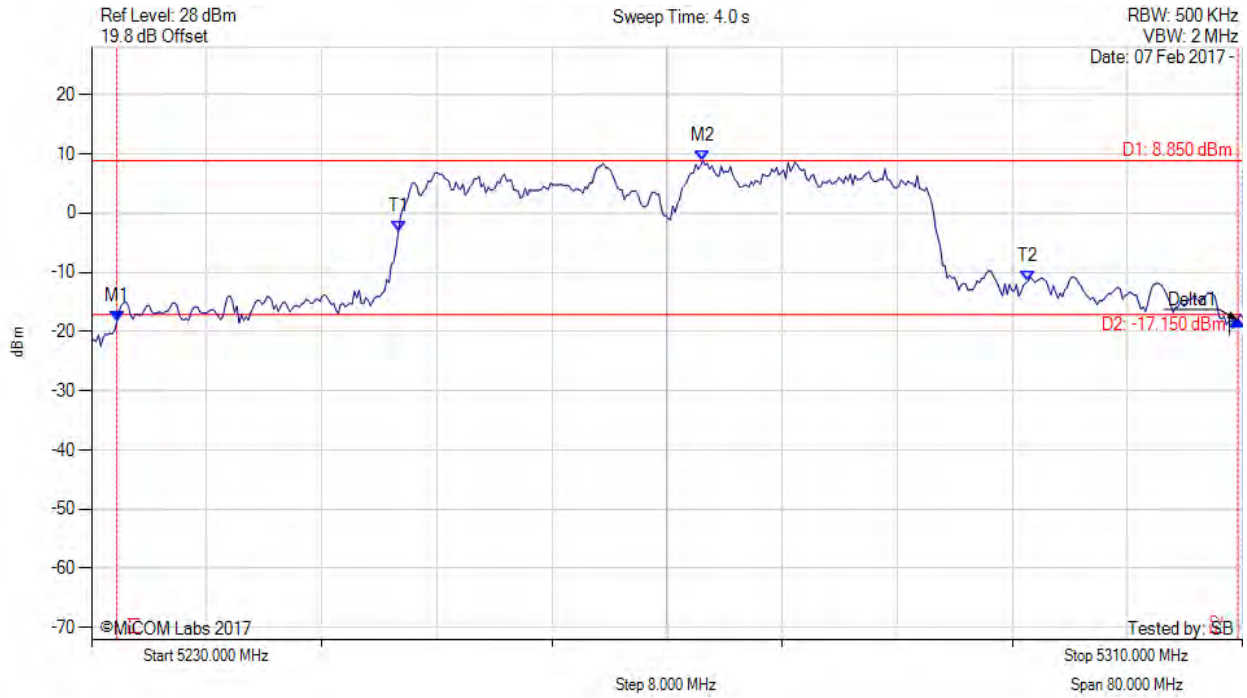

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5231.764 MHz : -18.256 dBm M2 : 5272.485 MHz : 8.850 dBm Delta1 : 77.916 MHz : 0.232 dB T1 : 5251.323 MHz : -3.102 dBm T2 : 5295.090 MHz : -11.467 dBm OBW : 43.768 MHz	Measured 26 dB Bandwidth: 77.916 MHz Measured 99% Bandwidth: 43.768 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 85 of 189

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

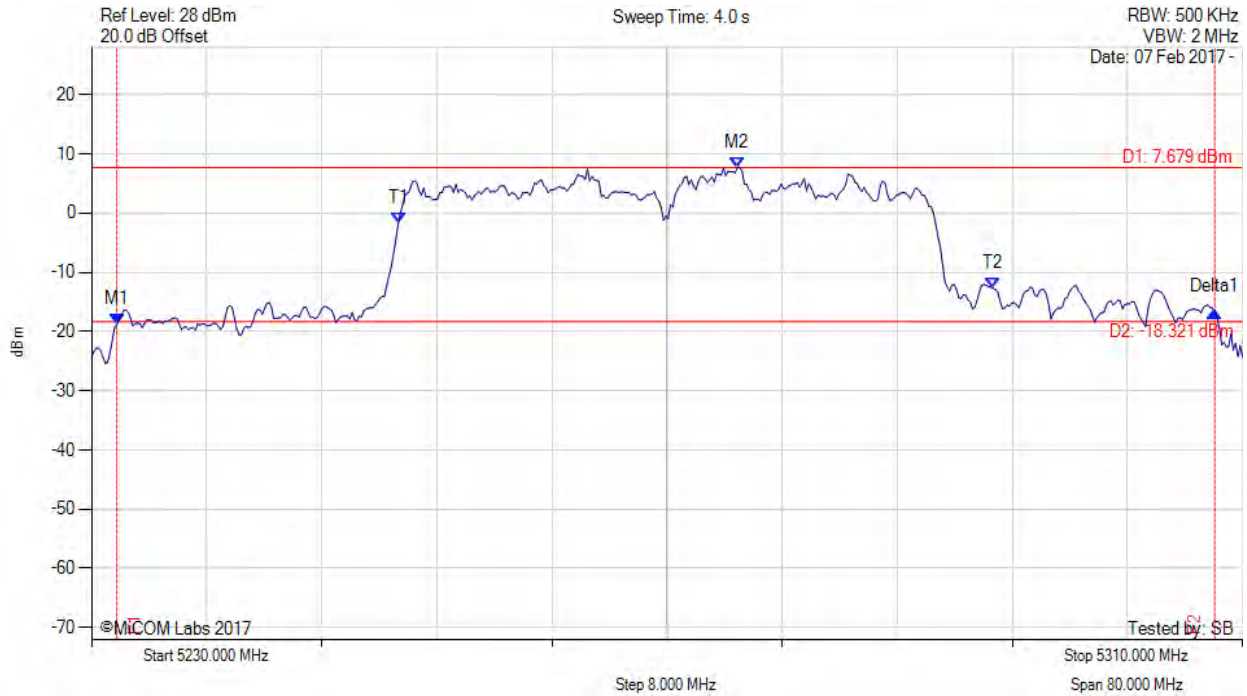

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5231.764 MHz : -18.786 dBm M2 : 5274.890 MHz : 7.679 dBm Delta1 : 76.313 MHz : 2.140 dB T1 : 5251.323 MHz : -1.715 dBm T2 : 5292.685 MHz : -12.718 dBm OBW : 41.363 MHz	Measured 26 dB Bandwidth: 76.313 MHz Measured 99% Bandwidth: 41.363 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 86 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

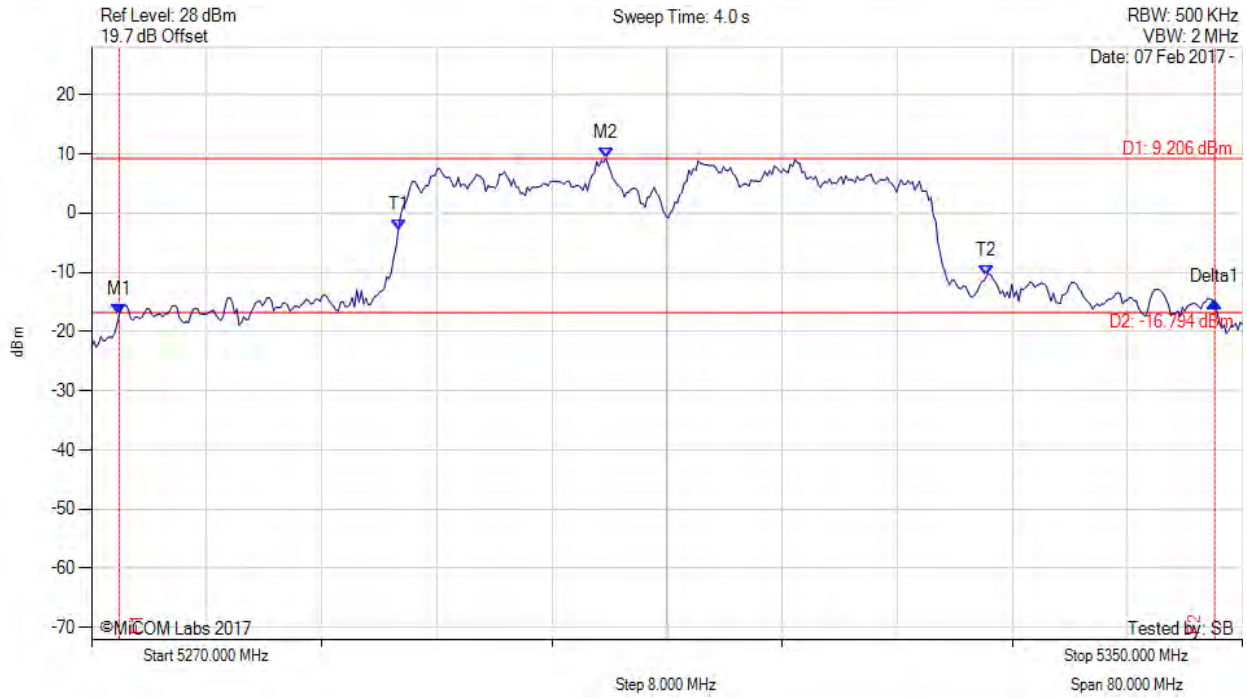

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5271.924 MHz : -17.135 dBm M2 : 5305.752 MHz : 9.206 dBm Delta1 : 76.152 MHz : 2.087 dB T1 : 5291.323 MHz : -2.903 dBm T2 : 5332.204 MHz : -10.645 dBm OBW : 40.882 MHz	Measured 26 dB Bandwidth: 76.152 MHz Measured 99% Bandwidth: 40.882 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 87 of 189

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

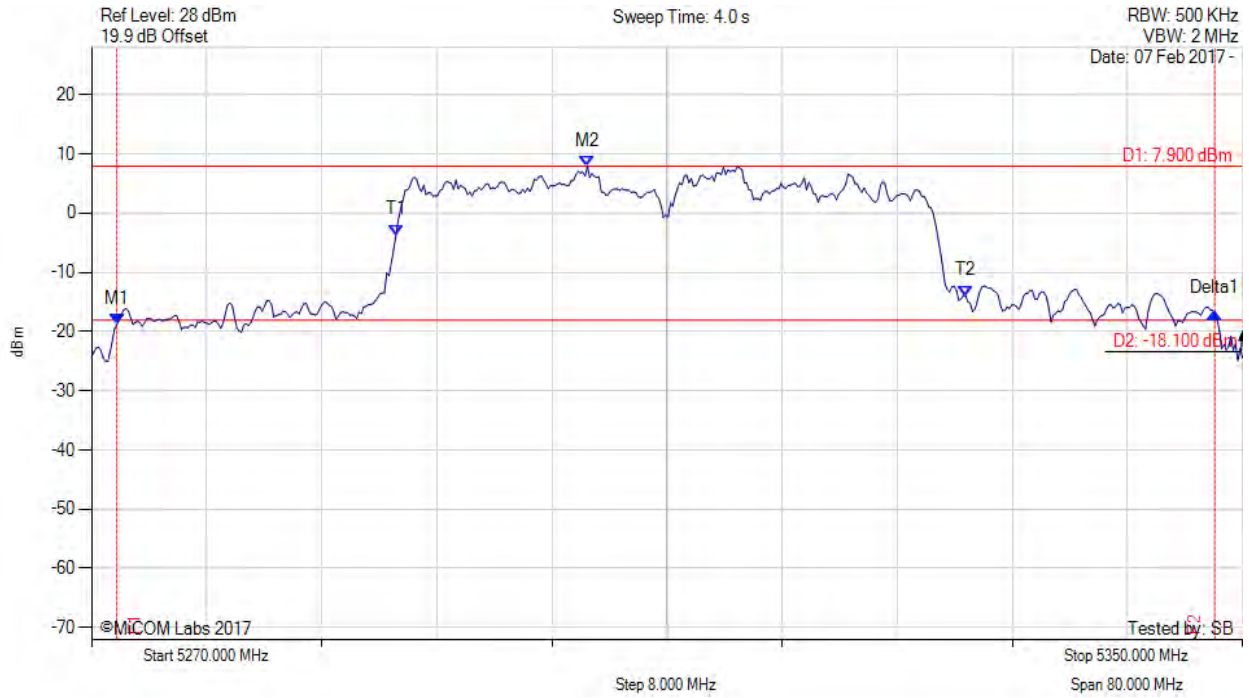

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5271.764 MHz : -18.855 dBm M2 : 5304.469 MHz : 7.900 dBm Delta1 : 76.313 MHz : 1.930 dB T1 : 5291.162 MHz : -3.704 dBm T2 : 5330.762 MHz : -13.972 dBm OBW : 39.599 MHz	Measured 26 dB Bandwidth: 76.313 MHz Measured 99% Bandwidth: 39.599 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 88 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5500.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

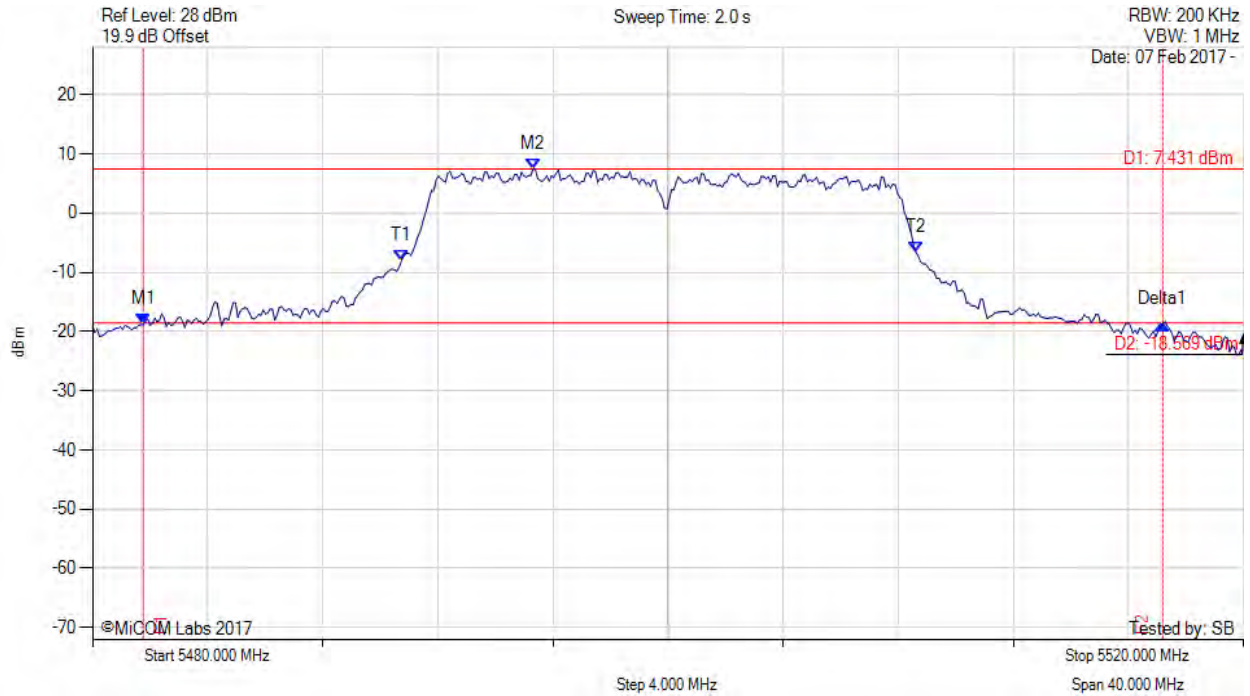

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5481.764 MHz : -18.862 dBm M2 : 5495.311 MHz : 7.431 dBm Delta1 : 35.431 MHz : 0.118 dB T1 : 5490.741 MHz : -8.036 dBm T2 : 5508.617 MHz : -6.622 dBm OBW : 17.876 MHz	Measured 26 dB Bandwidth: 35.431 MHz Measured 99% Bandwidth: 17.876 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 89 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5500.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

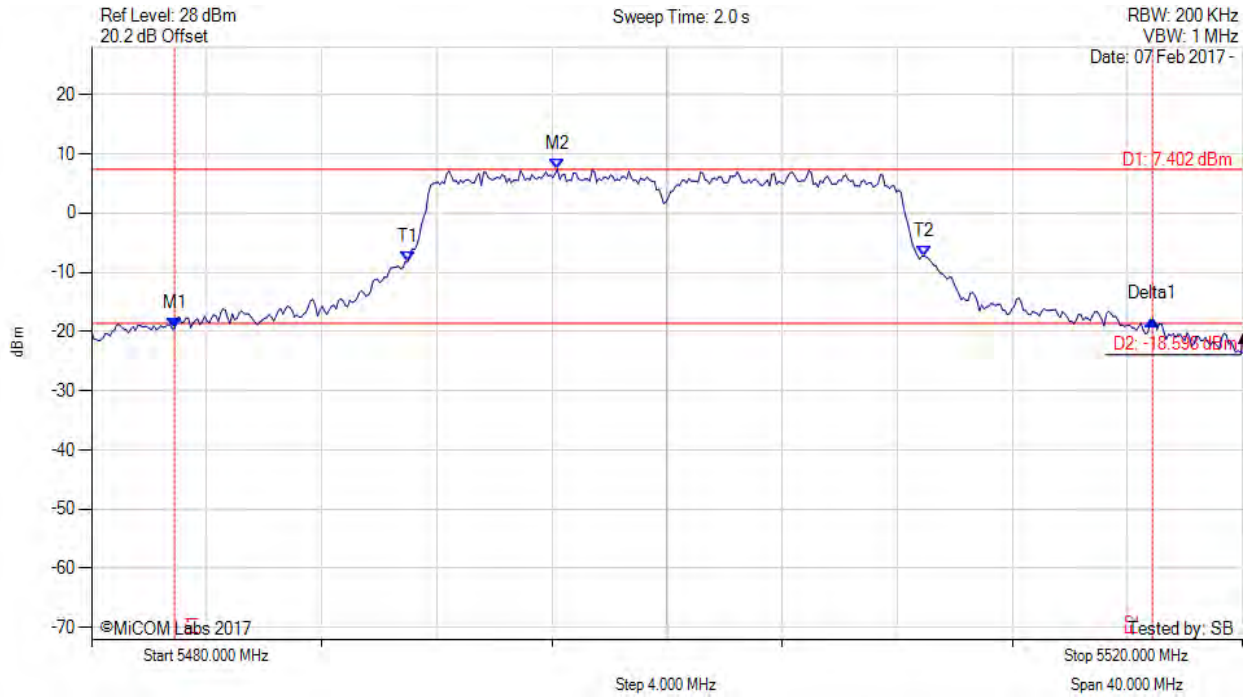

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5482.886 MHz : -19.569 dBm M2 : 5496.192 MHz : 7.402 dBm Delta1 : 33.988 MHz : 1.629 dB T1 : 5490.982 MHz : -8.254 dBm T2 : 5508.938 MHz : -7.255 dBm OBW : 17.956 MHz	Measured 26 dB Bandwidth: 33.988 MHz Measured 99% Bandwidth: 17.956 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 90 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5580.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

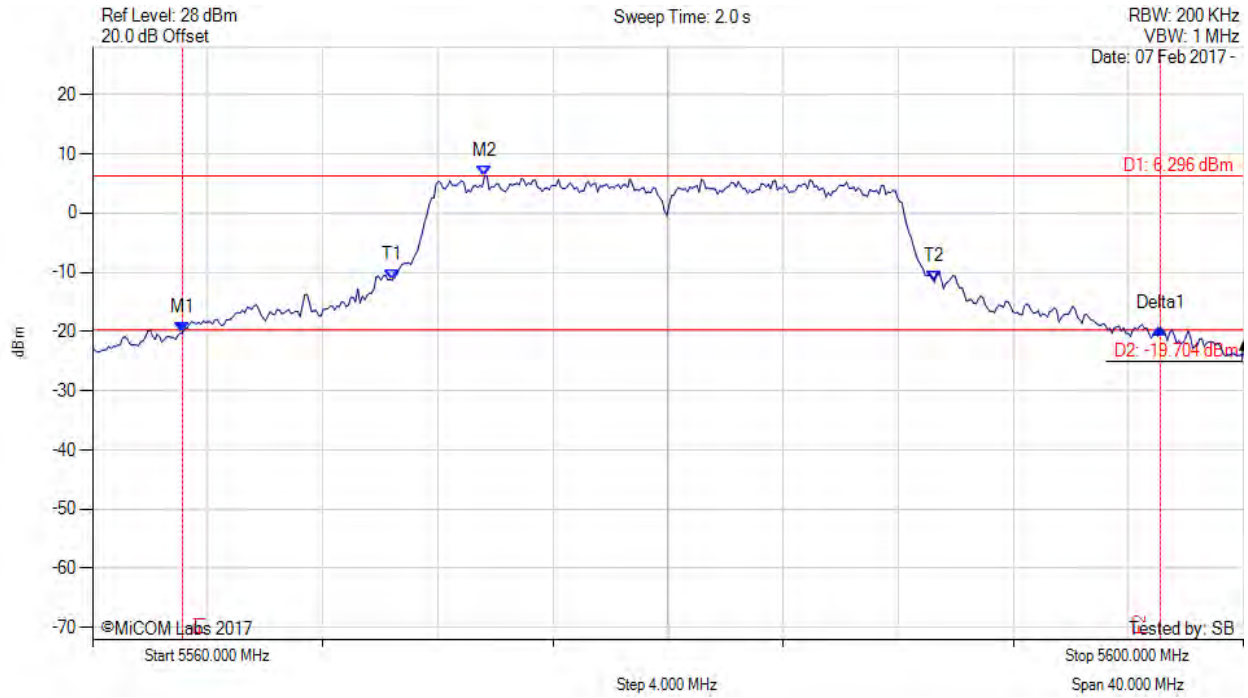

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5563.126 MHz : -20.245 dBm M2 : 5573.627 MHz : 6.296 dBm Delta1 : 33.988 MHz : 0.716 dB T1 : 5570.421 MHz : -11.335 dBm T2 : 5589.259 MHz : -11.628 dBm OBW : 18.838 MHz	Measured 26 dB Bandwidth: 33.988 MHz Measured 99% Bandwidth: 18.838 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 91 of 189

26 dB & 99% BANDWIDTH



Variant: 802.11a, Channel: 5580.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

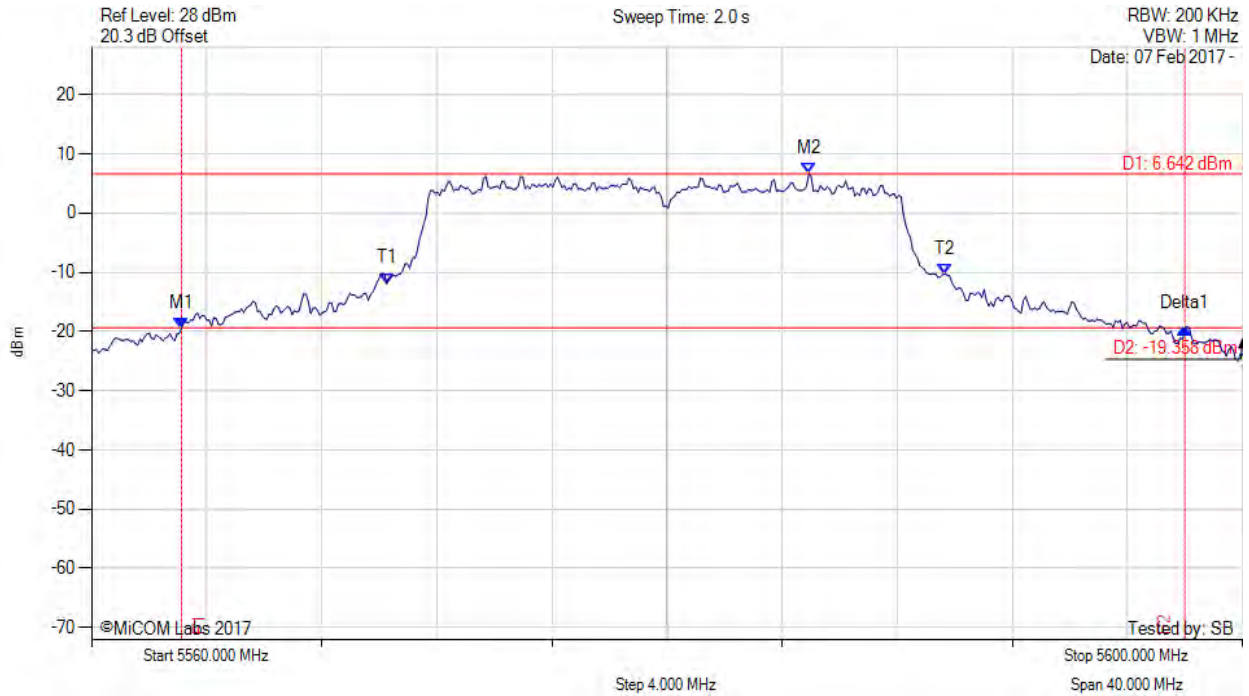

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5563.126 MHz : -19.429 dBm M2 : 5584.930 MHz : 6.642 dBm Delta1 : 34.870 MHz : -0.081 dB T1 : 5570.261 MHz : -11.876 dBm T2 : 5589.659 MHz : -10.263 dBm OBW : 19.399 MHz	Measured 26 dB Bandwidth: 34.870 MHz Measured 99% Bandwidth: 19.399 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 92 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5720.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

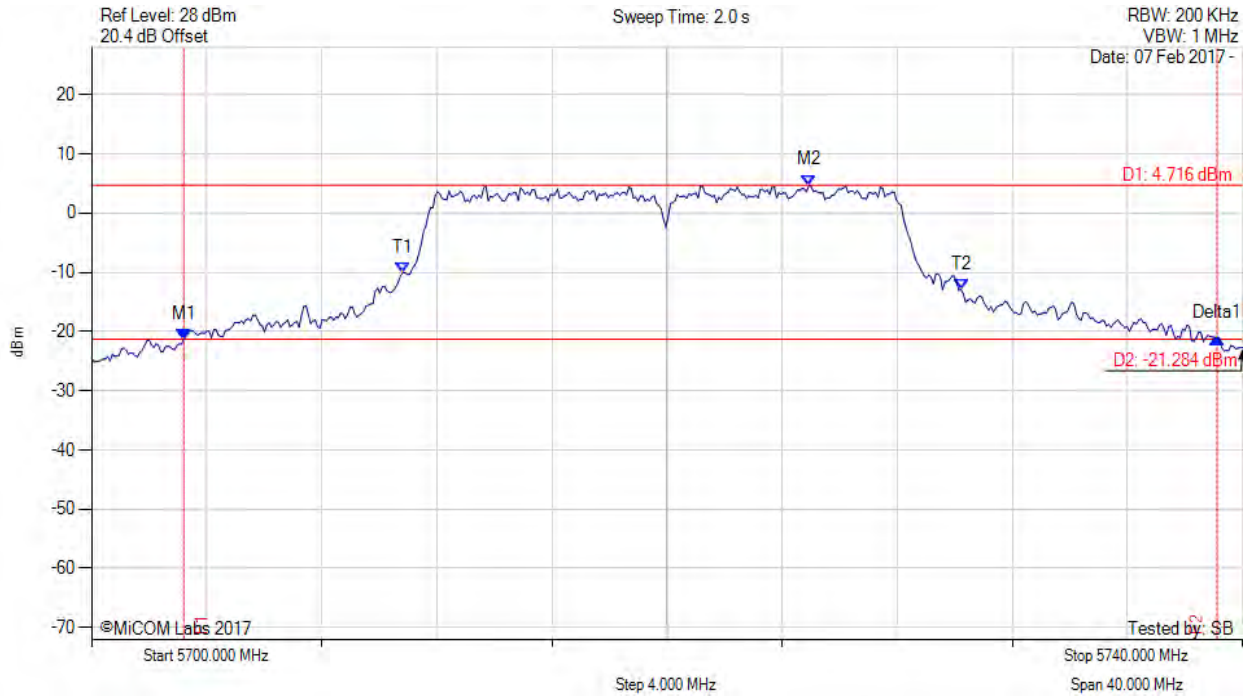

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5703.206 MHz : -21.316 dBm M2 : 5724.930 MHz : 4.716 dBm Delta1 : 35.912 MHz : 0.246 dB T1 : 5710.822 MHz : -10.082 dBm T2 : 5730.220 MHz : -12.907 dBm OBW : 19.399 MHz	Measured 26 dB Bandwidth: 35.912 MHz Measured 99% Bandwidth: 19.399 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 93 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5720.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

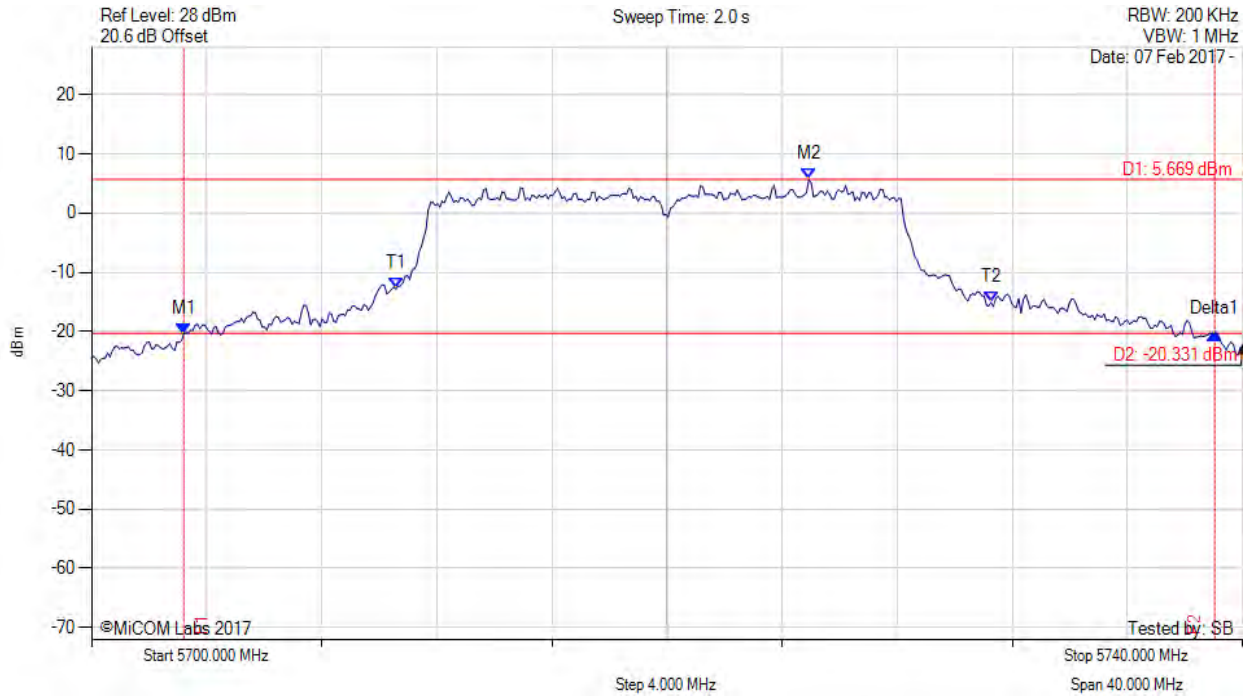

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5703.206 MHz : -20.350 dBm M2 : 5724.930 MHz : 5.669 dBm Delta1 : 35.832 MHz : -0.047 dB T1 : 5710.581 MHz : -12.783 dBm T2 : 5731.263 MHz : -15.103 dBm OBW : 20.681 MHz	Measured 26 dB Bandwidth: 35.832 MHz Measured 99% Bandwidth: 20.681 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 94 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5530.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

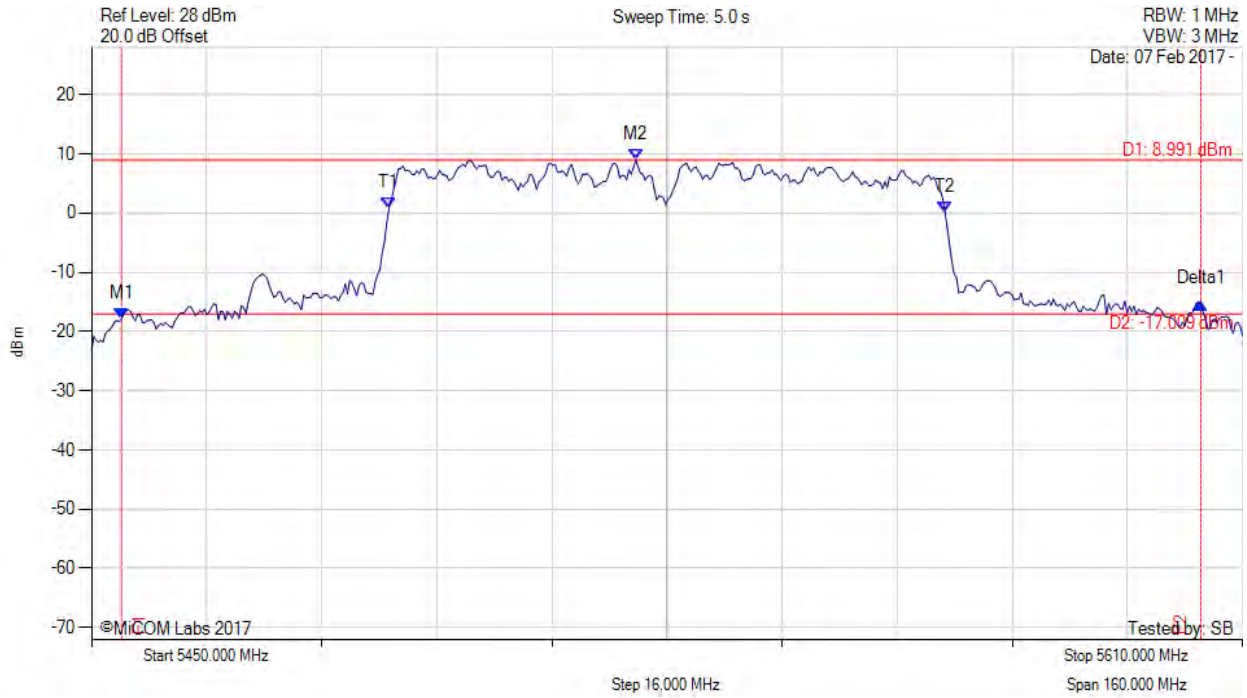

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5454.168 MHz : -17.820 dBm M2 : 5525.671 MHz : 8.991 dBm Delta1 : 150.060 MHz : 2.648 dB T1 : 5491.363 MHz : 0.937 dBm T2 : 5568.637 MHz : 0.193 dBm OBW : 77.275 MHz	Measured 26 dB Bandwidth: 150.060 MHz Measured 99% Bandwidth: 77.275 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 95 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5530.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

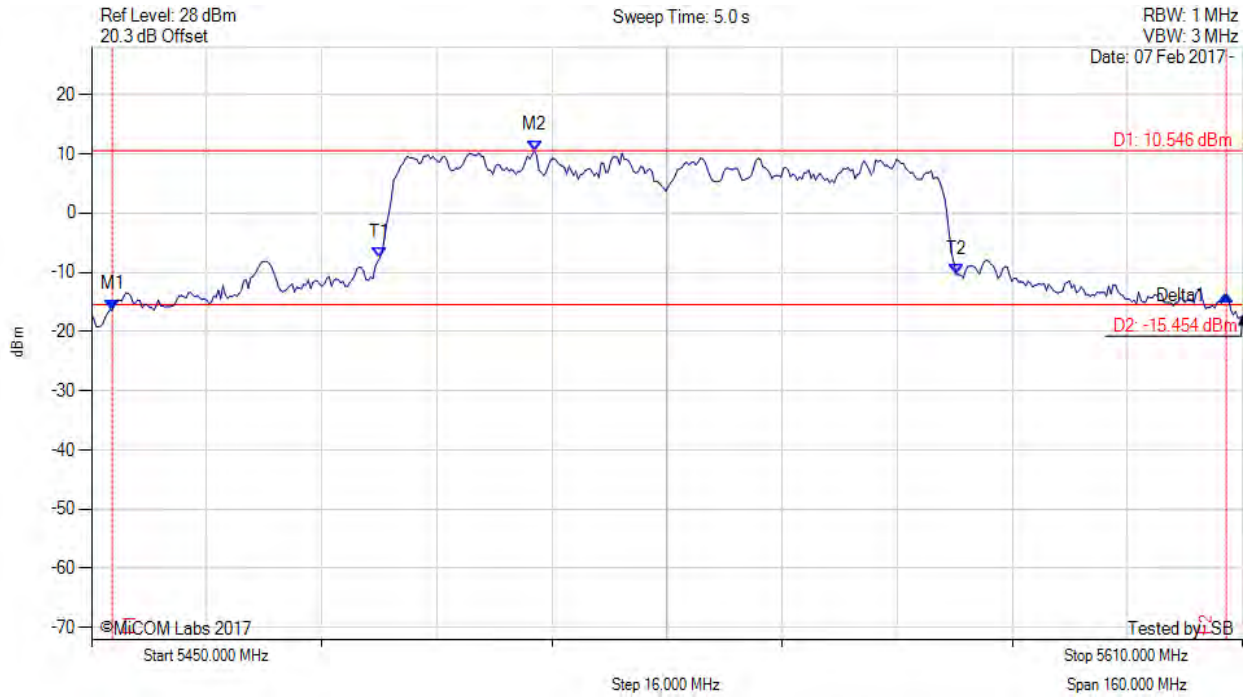

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5452.886 MHz : -16.317 dBm M2 : 5511.563 MHz : 10.546 dBm Delta1 : 154.870 MHz : 2.455 dB T1 : 5490.080 MHz : -7.591 dBm T2 : 5570.240 MHz : -10.401 dBm OBW : 80.160 MHz	Measured 26 dB Bandwidth: 154.870 MHz Measured 99% Bandwidth: 80.160 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 96 of 189

26 dB & 99% BANDWIDTH



Variant: 802.11ac-80, Channel: 5610.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

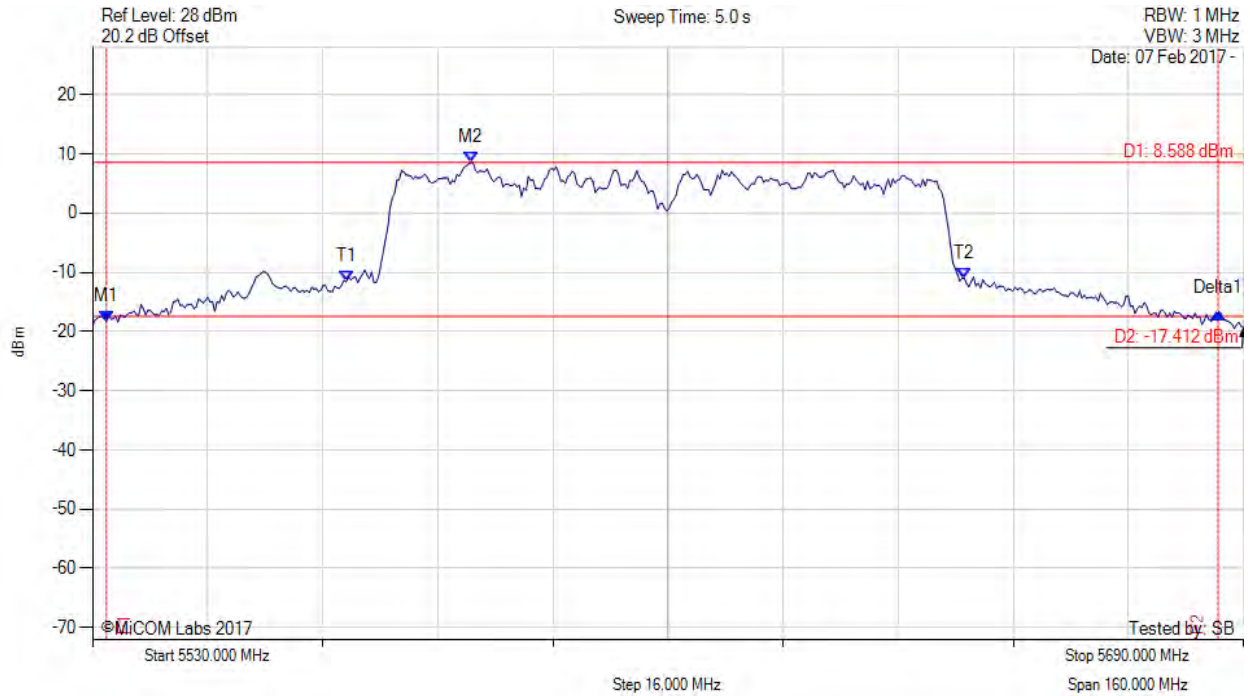

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5531.924 MHz : -18.217 dBm M2 : 5582.585 MHz : 8.588 dBm Delta1 : 154.549 MHz : 1.407 dB T1 : 5565.271 MHz : -11.597 dBm T2 : 5651.202 MHz : -11.024 dBm OBW : 85.932 MHz	Measured 26 dB Bandwidth: 154.549 MHz Measured 99% Bandwidth: 85.932 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 97 of 189

26 dB & 99% BANDWIDTH



Variant: 802.11ac-80, Channel: 5610.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

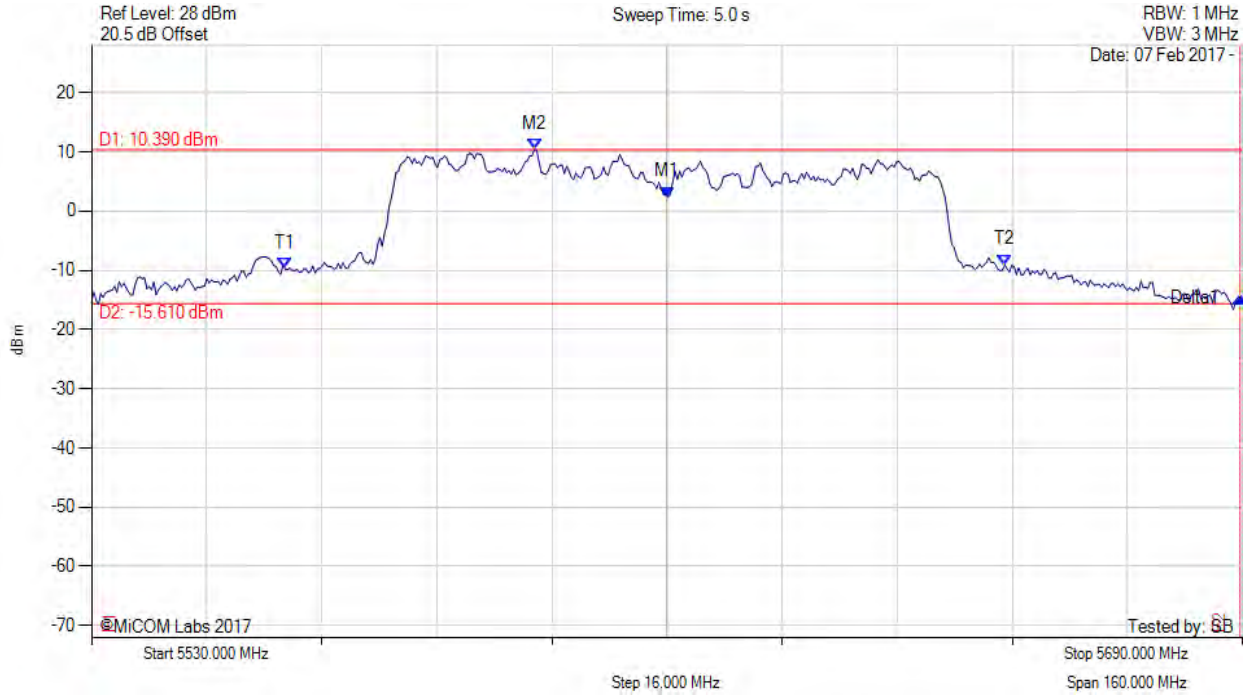

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5610.000 MHz : 2.371 dBm M2 : 5591.563 MHz : 10.390 dBm Delta1 : 79.679 MHz : -16.925 dB T1 : 5556.934 MHz : -9.746 dBm T2 : 5656.974 MHz : -9.069 dBm OBW : 100.040 MHz	Measured 26 dB Bandwidth: 79.679 MHz Measured 99% Bandwidth: 100.040 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 98 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5690.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

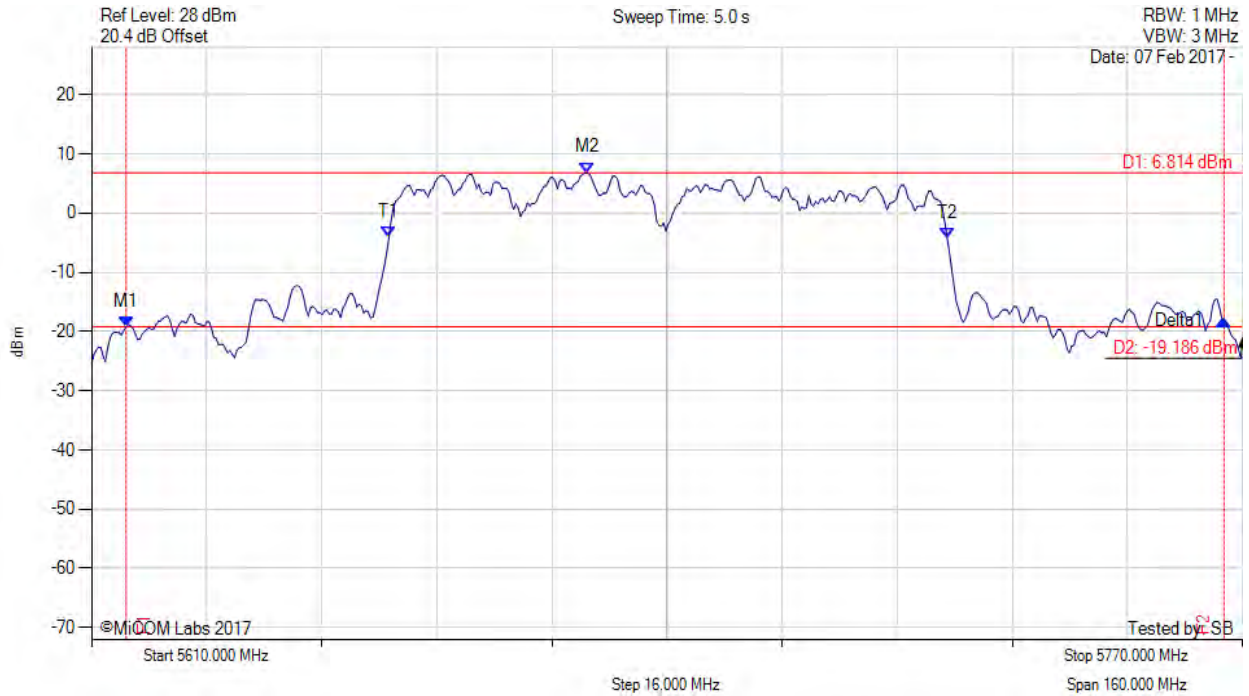

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5614.810 MHz : -19.220 dBm M2 : 5678.938 MHz : 6.814 dBm Delta1 : 152.625 MHz : 1.139 dB T1 : 5651.363 MHz : -4.017 dBm T2 : 5728.958 MHz : -4.200 dBm OBW : 77.595 MHz	Measured 26 dB Bandwidth: 152.625 MHz Measured 99% Bandwidth: 77.595 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 99 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11ac-80, Channel: 5690.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

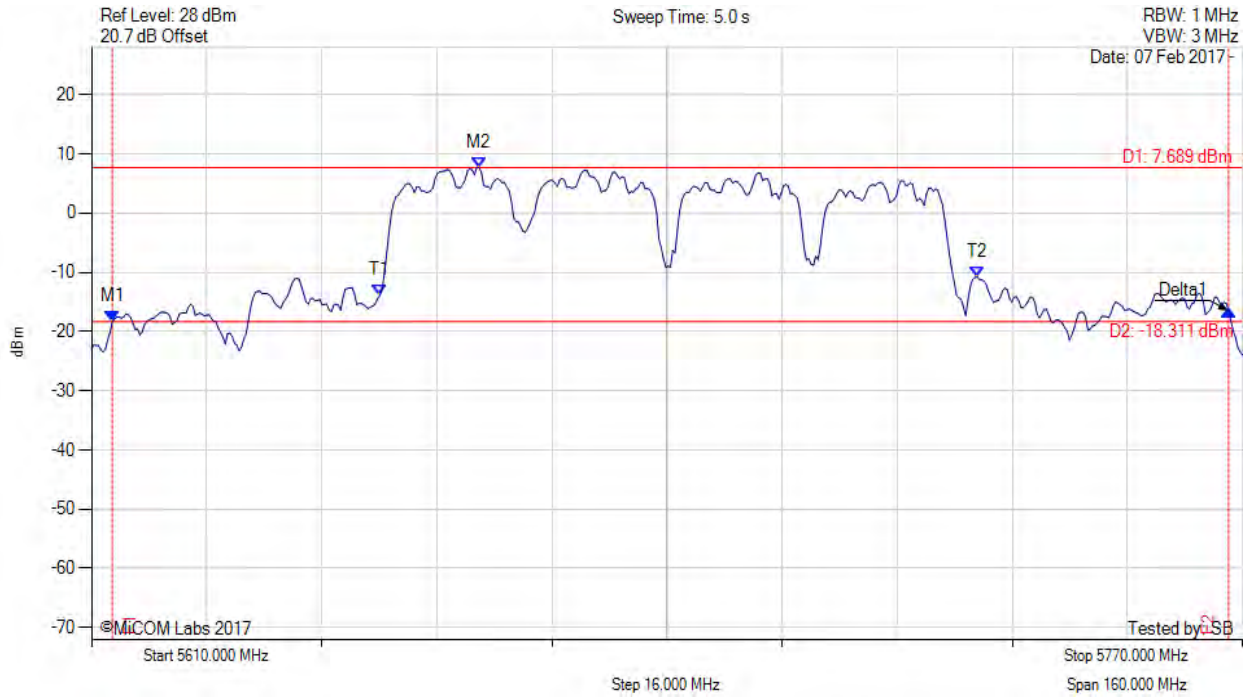

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5612.886 MHz : -18.373 dBm M2 : 5663.868 MHz : 7.689 dBm Delta1 : 155.190 MHz : 1.869 dB T1 : 5650.080 MHz : -13.930 dBm T2 : 5733.126 MHz : -10.814 dBm OBW : 83.046 MHz	Measured 26 dB Bandwidth: 155.190 MHz Measured 99% Bandwidth: 83.046 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 100 of 189

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

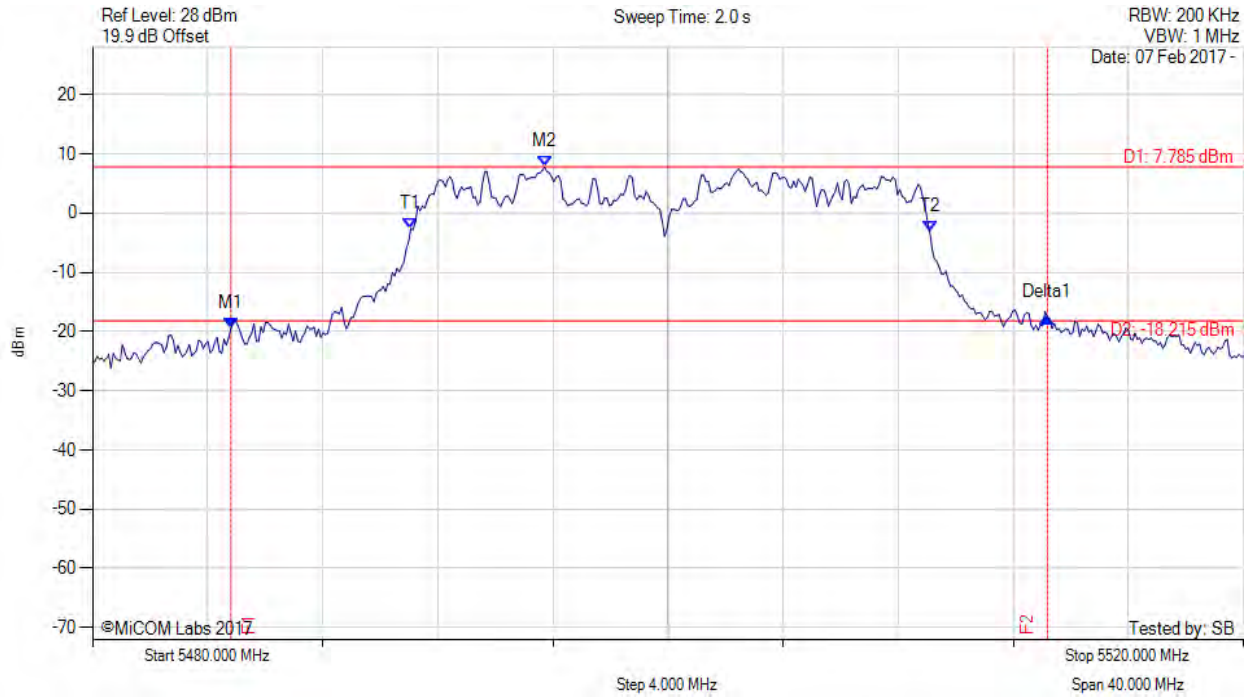

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5484.810 MHz : -19.419 dBm M2 : 5495.711 MHz : 7.785 dBm Delta1 : 28.377 MHz : 1.843 dB T1 : 5491.062 MHz : -2.671 dBm T2 : 5509.098 MHz : -3.206 dBm OBW : 18.036 MHz	Measured 26 dB Bandwidth: 28.377 MHz Measured 99% Bandwidth: 18.036 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 101 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

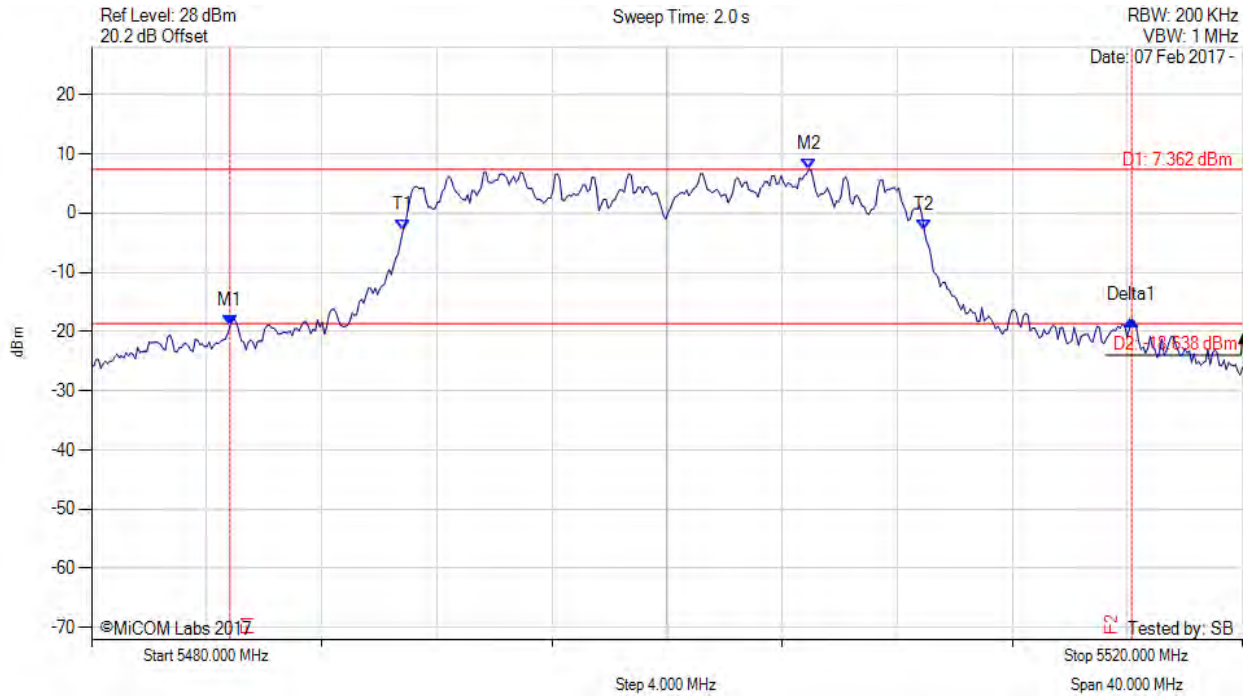

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5484.810 MHz : -19.057 dBm M2 : 5504.930 MHz : 7.362 dBm Delta1 : 31.343 MHz : 0.931 dB T1 : 5490.822 MHz : -2.929 dBm T2 : 5508.938 MHz : -2.789 dBm OBW : 18.116 MHz	Measured 26 dB Bandwidth: 31.343 MHz Measured 99% Bandwidth: 18.116 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 102 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

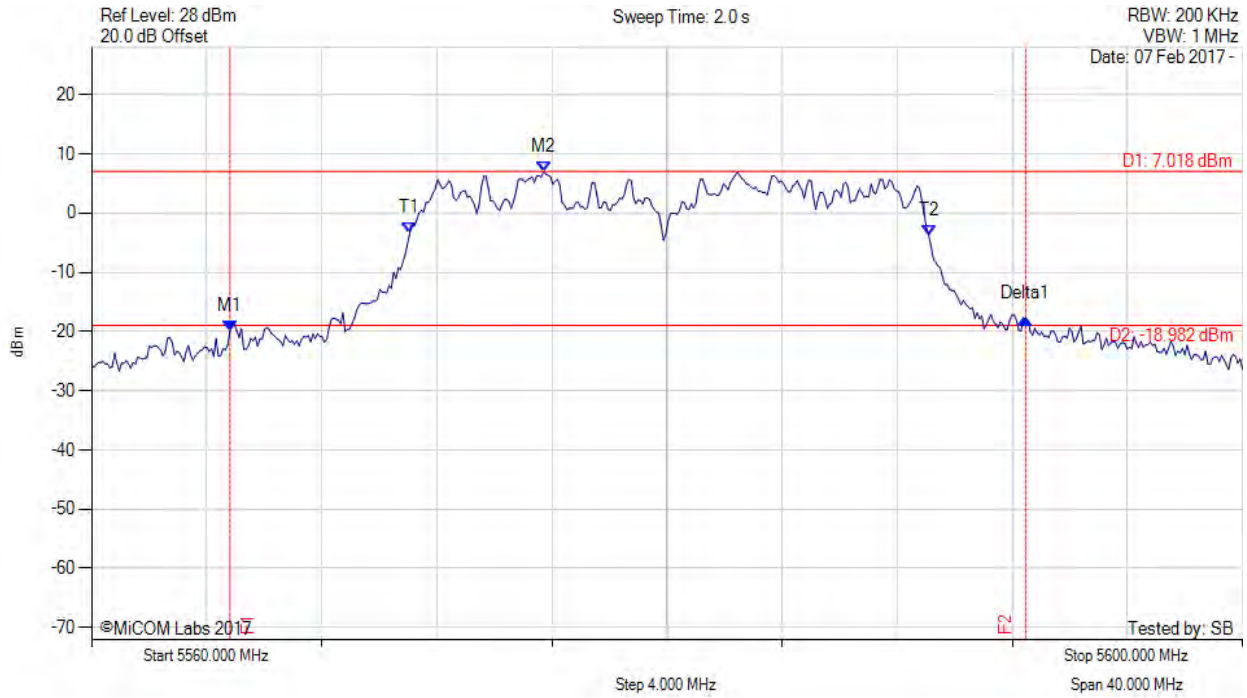

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5564.810 MHz : -19.889 dBm M2 : 5575.711 MHz : 7.018 dBm Delta1 : 27.655 MHz : 2.054 dB T1 : 5571.062 MHz : -3.375 dBm T2 : 5589.098 MHz : -3.820 dBm OBW : 18.036 MHz	Measured 26 dB Bandwidth: 27.655 MHz Measured 99% Bandwidth: 18.036 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 103 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

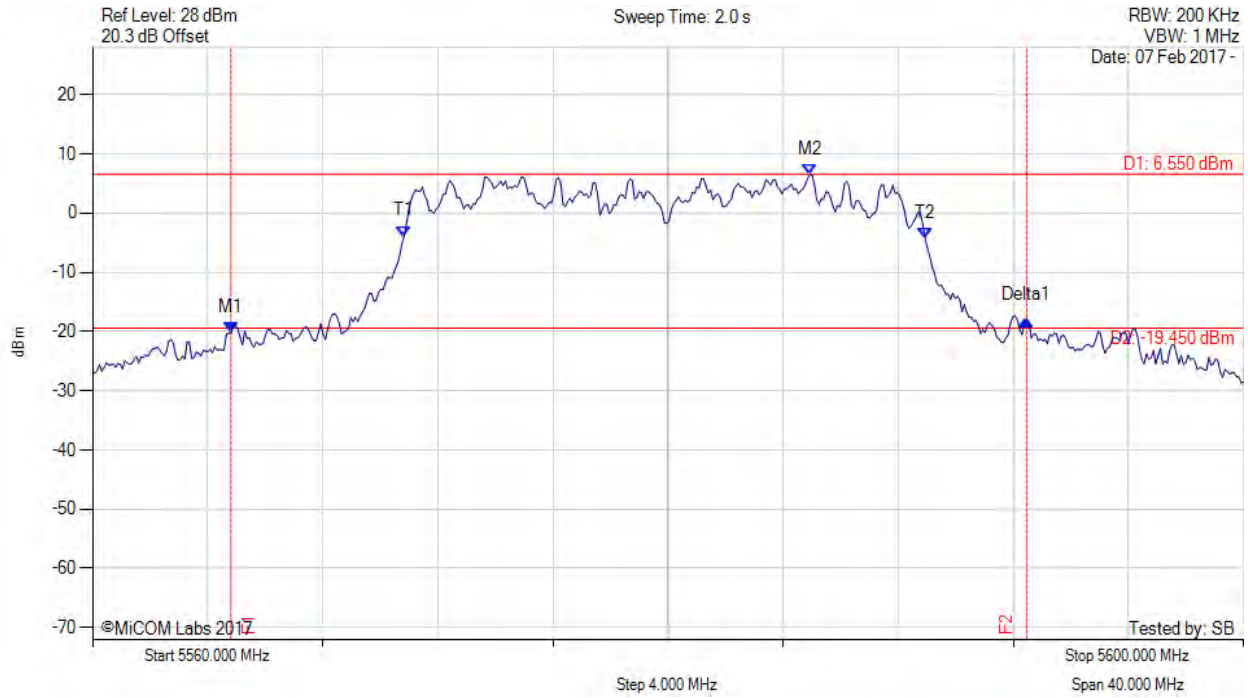

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5564.810 MHz : -20.212 dBm M2 : 5584.930 MHz : 6.550 dBm Delta1 : 27.655 MHz : 2.207 dB T1 : 5570.822 MHz : -3.936 dBm T2 : 5588.938 MHz : -4.249 dBm OBW : 18.116 MHz	Measured 26 dB Bandwidth: 27.655 MHz Measured 99% Bandwidth: 18.116 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 104 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5720.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

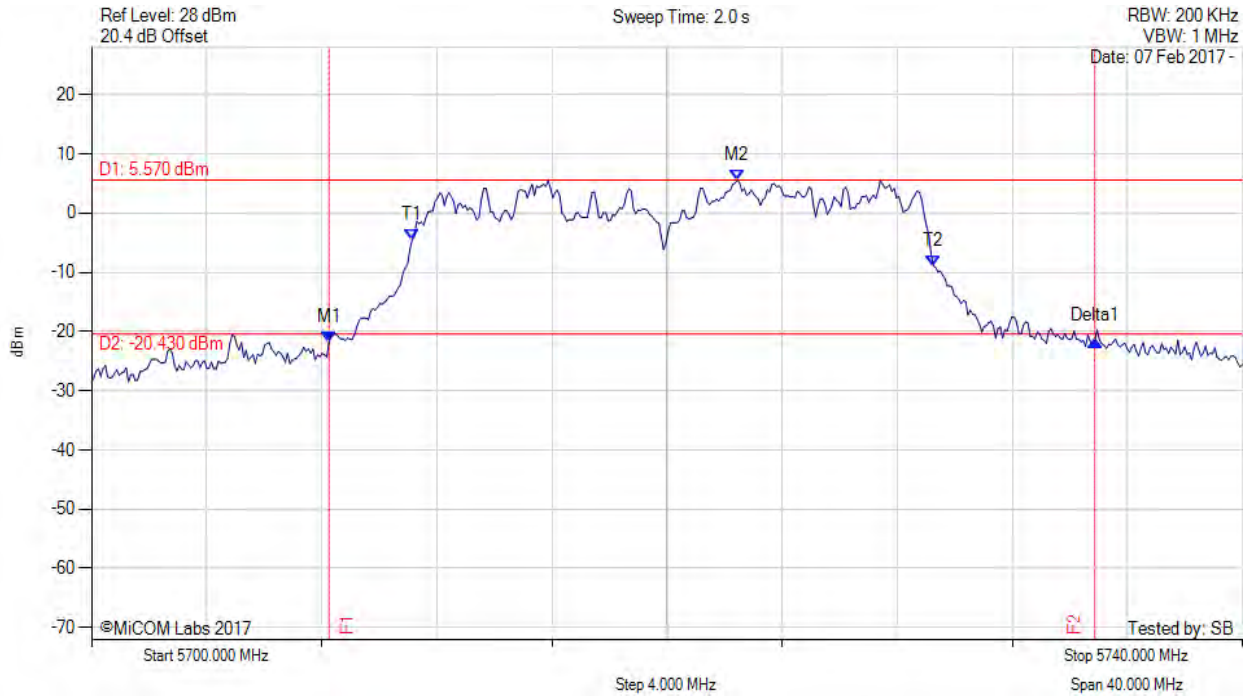

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5708.257 MHz : -21.731 dBm M2 : 5722.445 MHz : 5.570 dBm Delta1 : 26.613 MHz : 0.181 dB T1 : 5711.142 MHz : -4.475 dBm T2 : 5729.259 MHz : -8.908 dBm OBW : 18.116 MHz	Measured 26 dB Bandwidth: 26.613 MHz Measured 99% Bandwidth: 18.116 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 105 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 5720.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

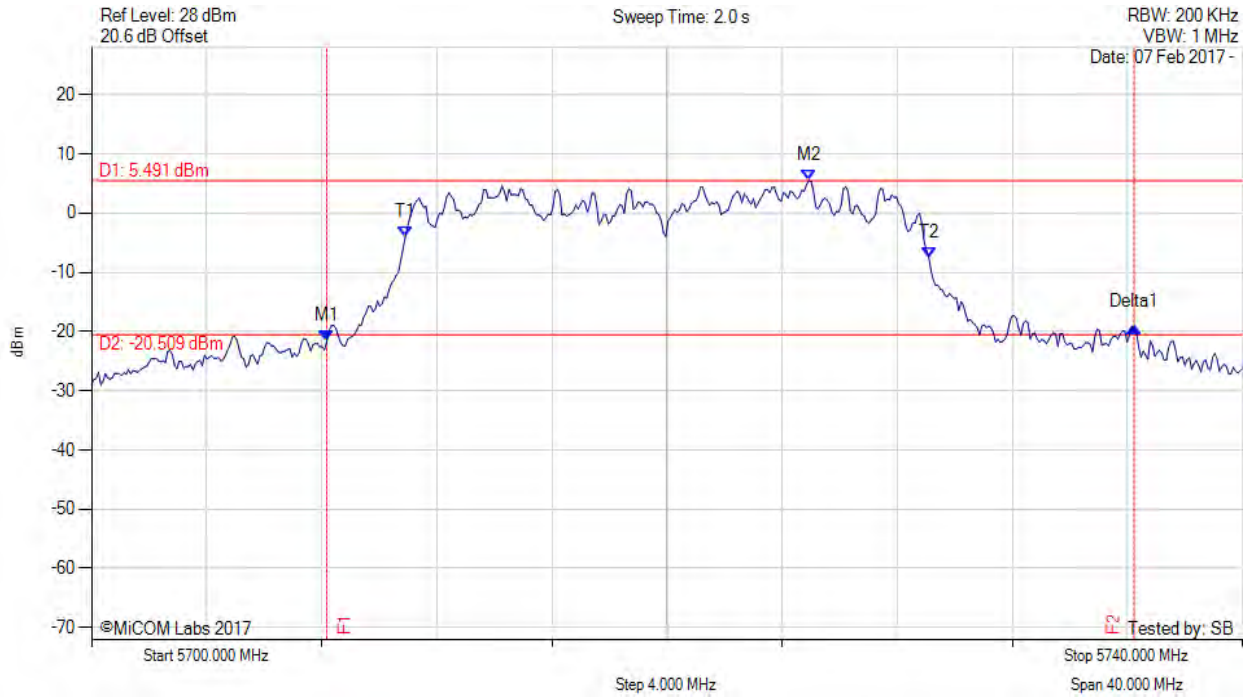

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5708.176 MHz : -21.640 dBm M2 : 5724.930 MHz : 5.491 dBm Delta1 : 28.056 MHz : 2.323 dB T1 : 5710.902 MHz : -4.123 dBm T2 : 5729.098 MHz : -7.511 dBm OBW : 18.196 MHz	Measured 26 dB Bandwidth: 28.056 MHz Measured 99% Bandwidth: 18.196 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 106 of 189

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

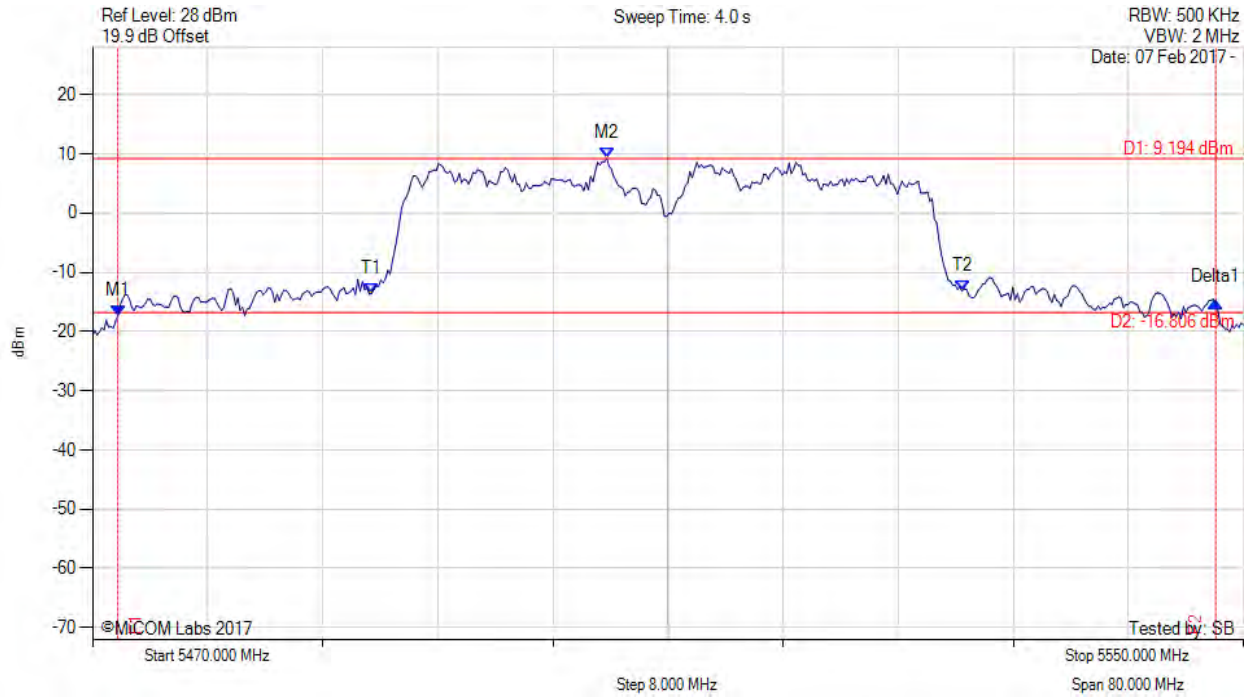

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5471.764 MHz : -17.363 dBm M2 : 5505.752 MHz : 9.194 dBm Delta1 : 76.313 MHz : 2.404 dB T1 : 5489.399 MHz : -13.564 dBm T2 : 5530.441 MHz : -13.147 dBm OBW : 41.042 MHz	Measured 26 dB Bandwidth: 76.313 MHz Measured 99% Bandwidth: 41.042 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 107 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

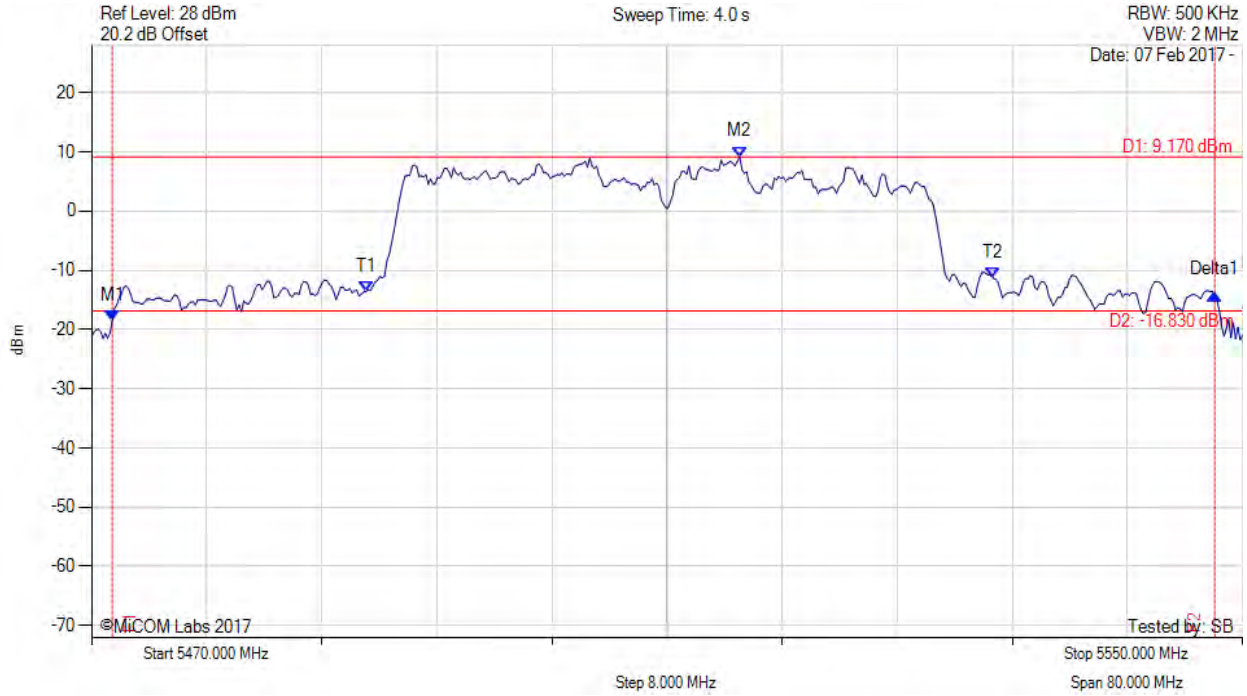

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5471.443 MHz : -18.563 dBm M2 : 5515.050 MHz : 9.170 dBm Delta1 : 76.633 MHz : 4.511 dB T1 : 5489.078 MHz : -13.541 dBm T2 : 5532.685 MHz : -11.296 dBm OBW : 43.607 MHz	Measured 26 dB Bandwidth: 76.633 MHz Measured 99% Bandwidth: 43.607 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 108 of 189



26 dB & 99% BANDWIDTH

Variants: 802.11n HT-40, Channel: 5550.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

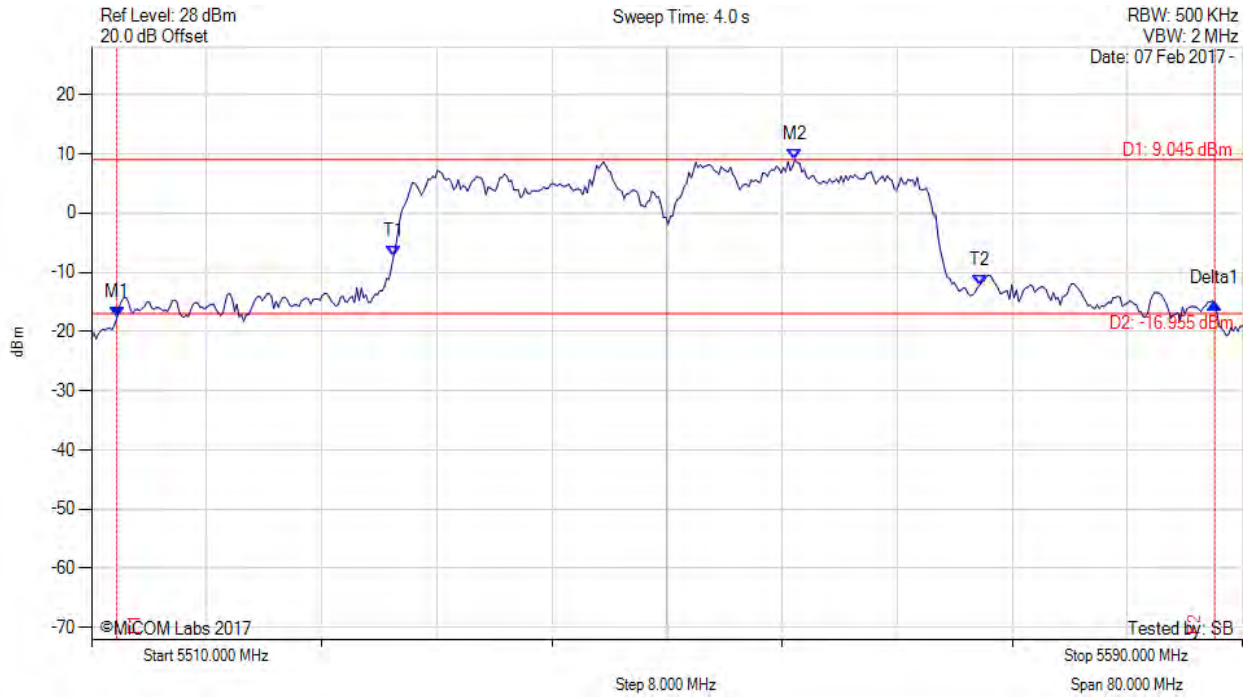

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5511.764 MHz : -17.643 dBm M2 : 5558.898 MHz : 9.045 dBm Delta1 : 76.313 MHz : 2.473 dB T1 : 5531.002 MHz : -7.259 dBm T2 : 5571.723 MHz : -12.252 dBm OBW : 40.721 MHz	Measured 26 dB Bandwidth: 76.313 MHz Measured 99% Bandwidth: 40.721 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 109 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

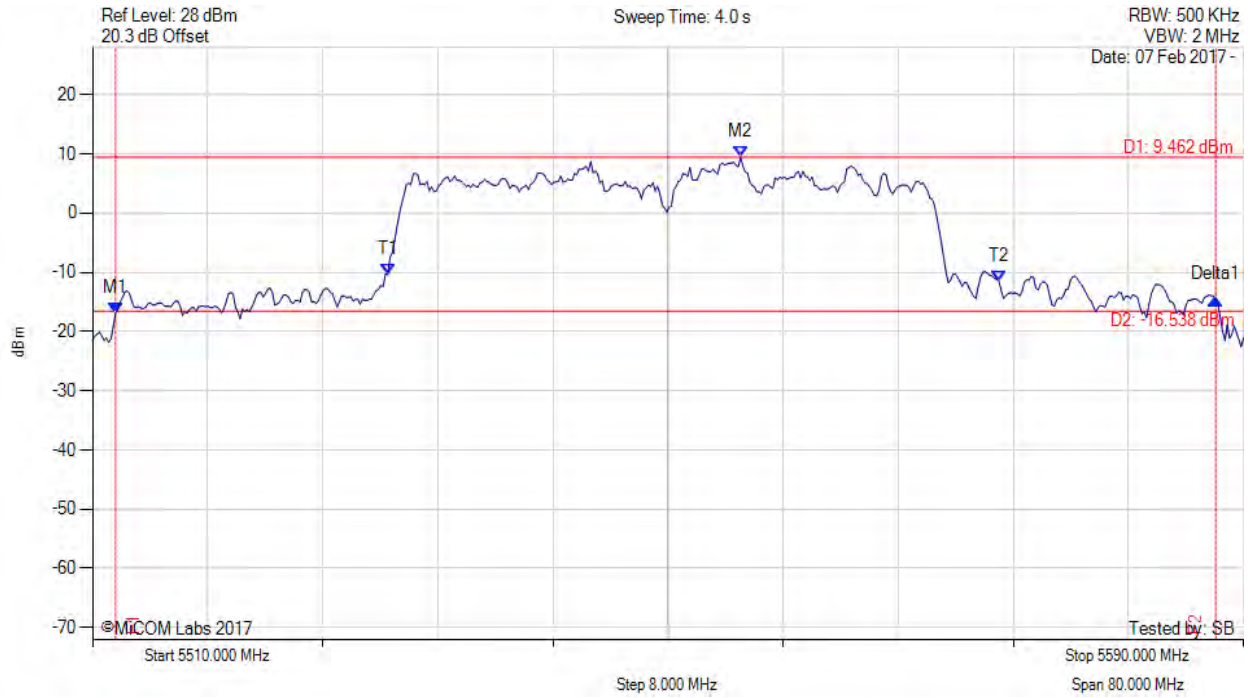

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5511.603 MHz : -16.828 dBm M2 : 5555.050 MHz : 9.462 dBm Delta1 : 76.473 MHz : 2.339 dB T1 : 5530.521 MHz : -10.363 dBm T2 : 5573.006 MHz : -11.518 dBm OBW : 42.485 MHz	Measured 26 dB Bandwidth: 76.473 MHz Measured 99% Bandwidth: 42.485 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 110 of 189

26 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 5710.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

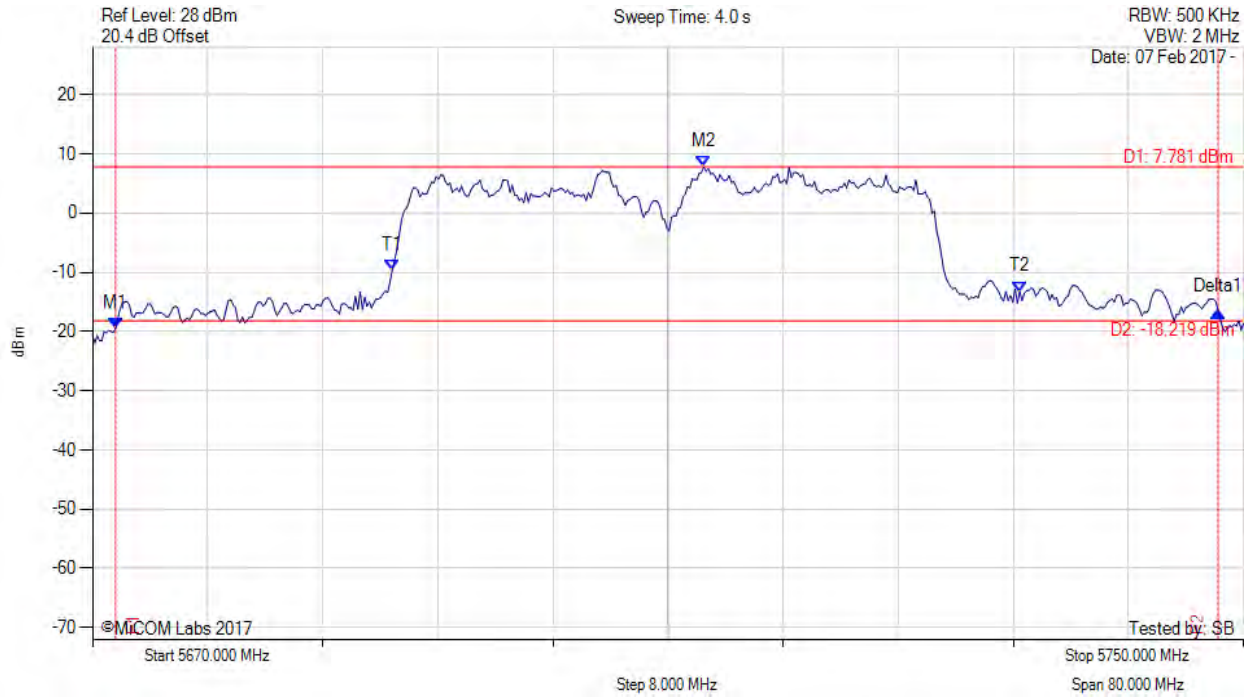

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5671.603 MHz : -19.486 dBm M2 : 5712.485 MHz : 7.781 dBm Delta1 : 76.633 MHz : 2.900 dB T1 : 5690.842 MHz : -9.612 dBm T2 : 5734.449 MHz : -13.281 dBm OBW : 43.607 MHz	Measured 26 dB Bandwidth: 76.633 MHz Measured 99% Bandwidth: 43.607 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 111 of 189



26 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 5710.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

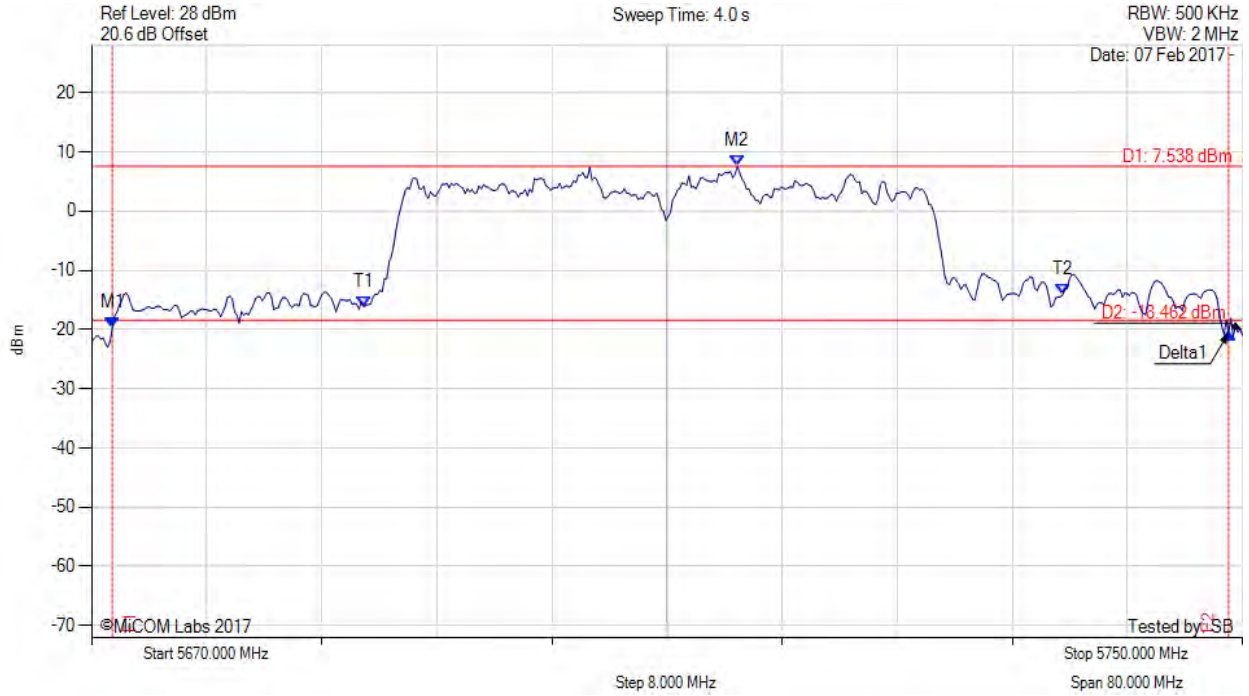


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 5671.443 MHz : -19.760 dBm M2 : 5714.890 MHz : 7.538 dBm Delta1 : 77.595 MHz : -0.801 dB T1 : 5688.918 MHz : -16.136 dBm T2 : 5737.495 MHz : -14.180 dBm OBW : 48.577 MHz	Measured 26 dB Bandwidth: 77.595 MHz Measured 99% Bandwidth: 48.577 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



A.2. Power Spectral Density

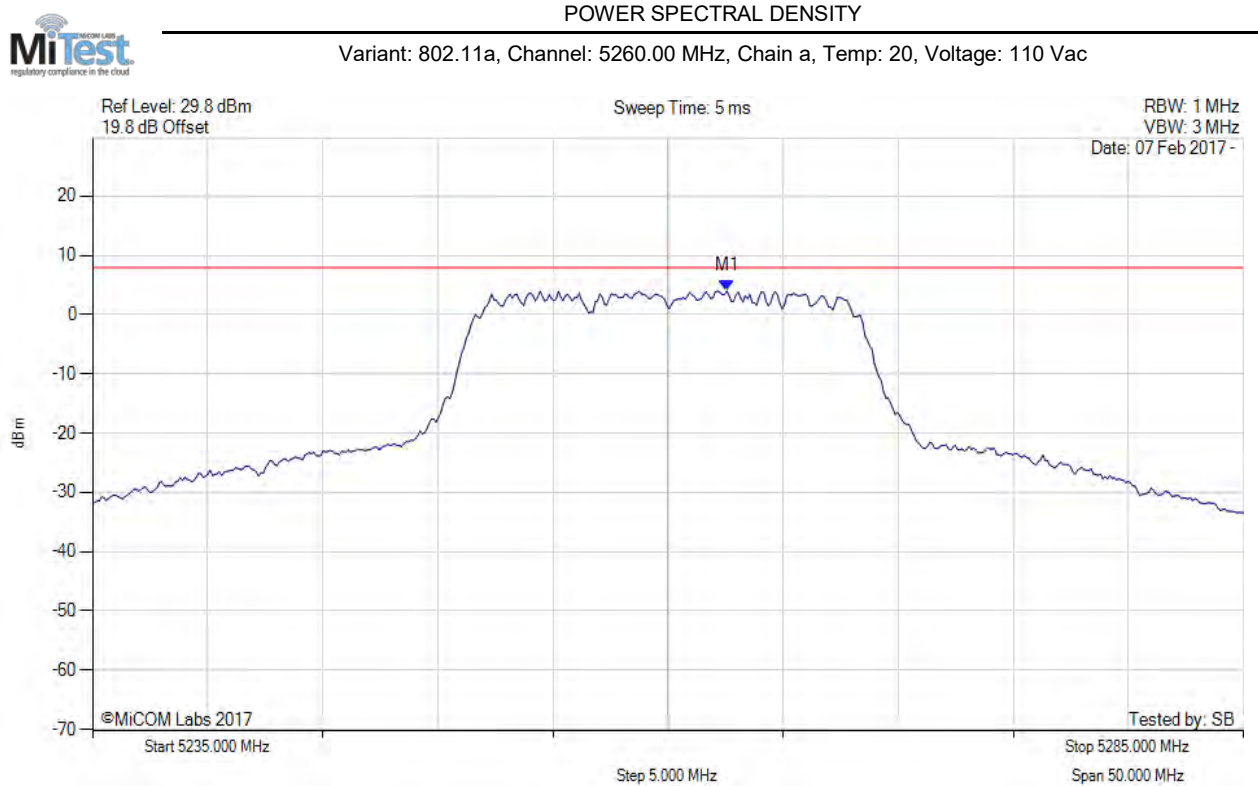

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5262.555 MHz : 4.021 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 113 of 189

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5260.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

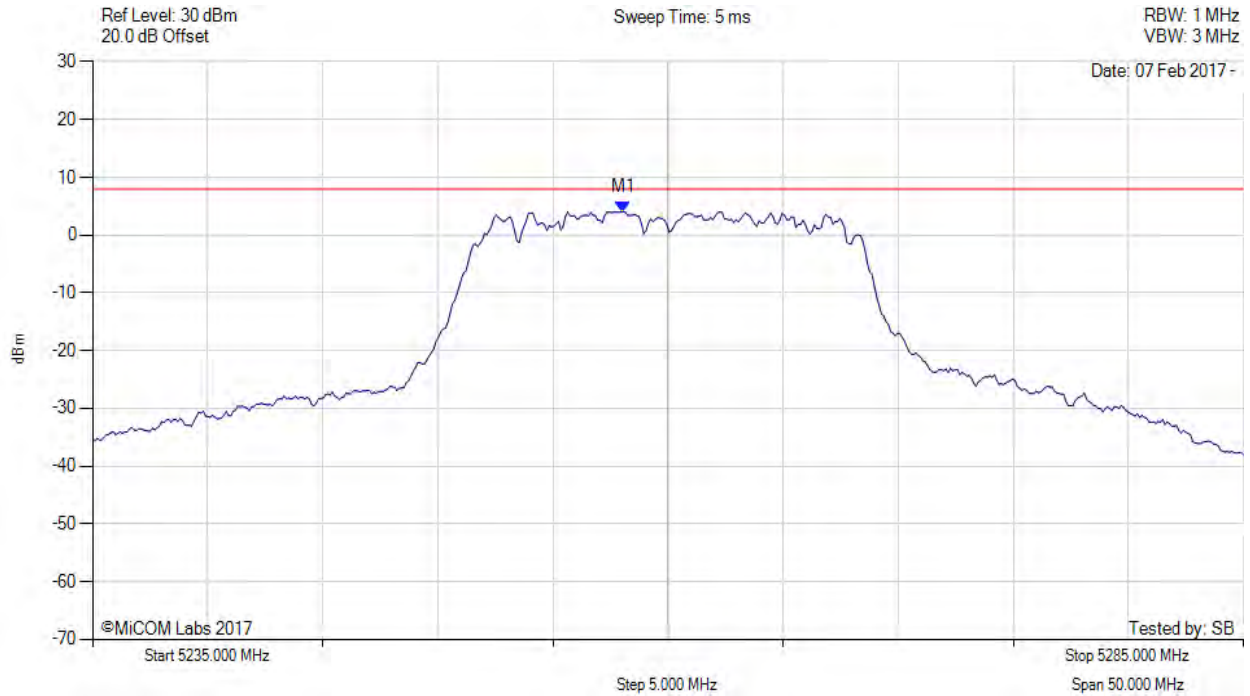

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = AVERAGE	M1 : 5258.046 MHz : 4.007 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 114 of 189

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5260.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

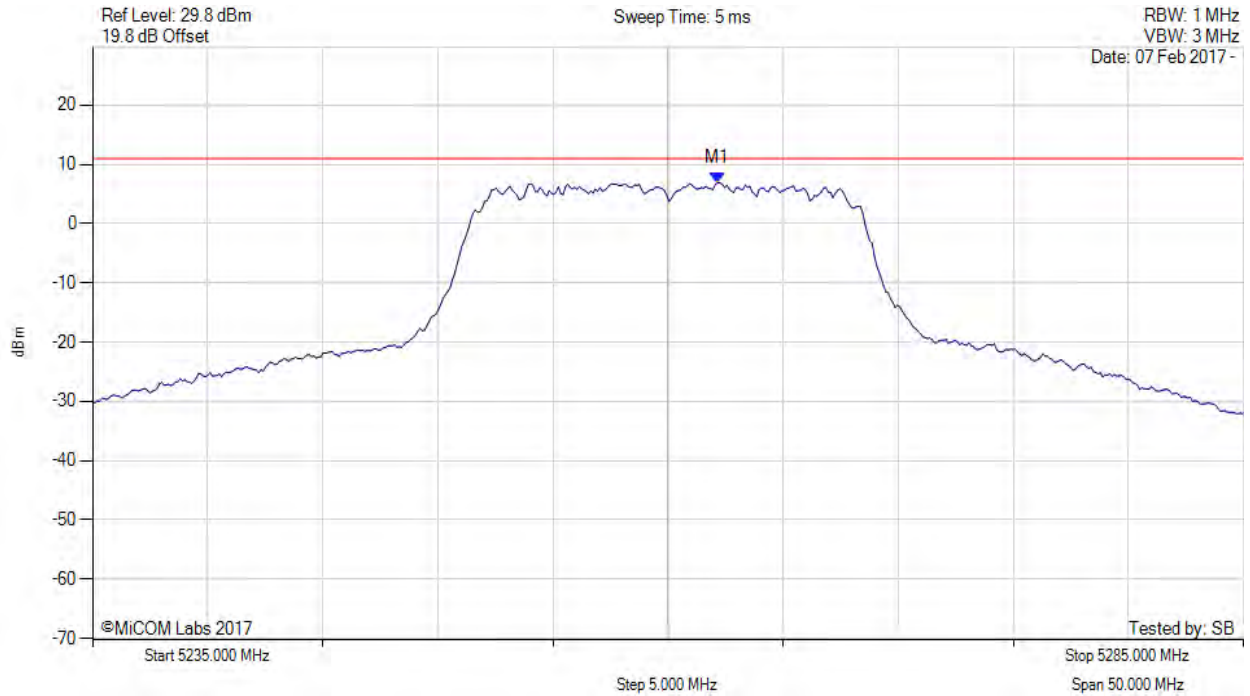

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5262.200 MHz : 6.955 dBm M1 + DCCF : 5262.200 MHz : 6.999 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 11.0 dBm Margin: -4.0 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 115 of 189

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5300.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

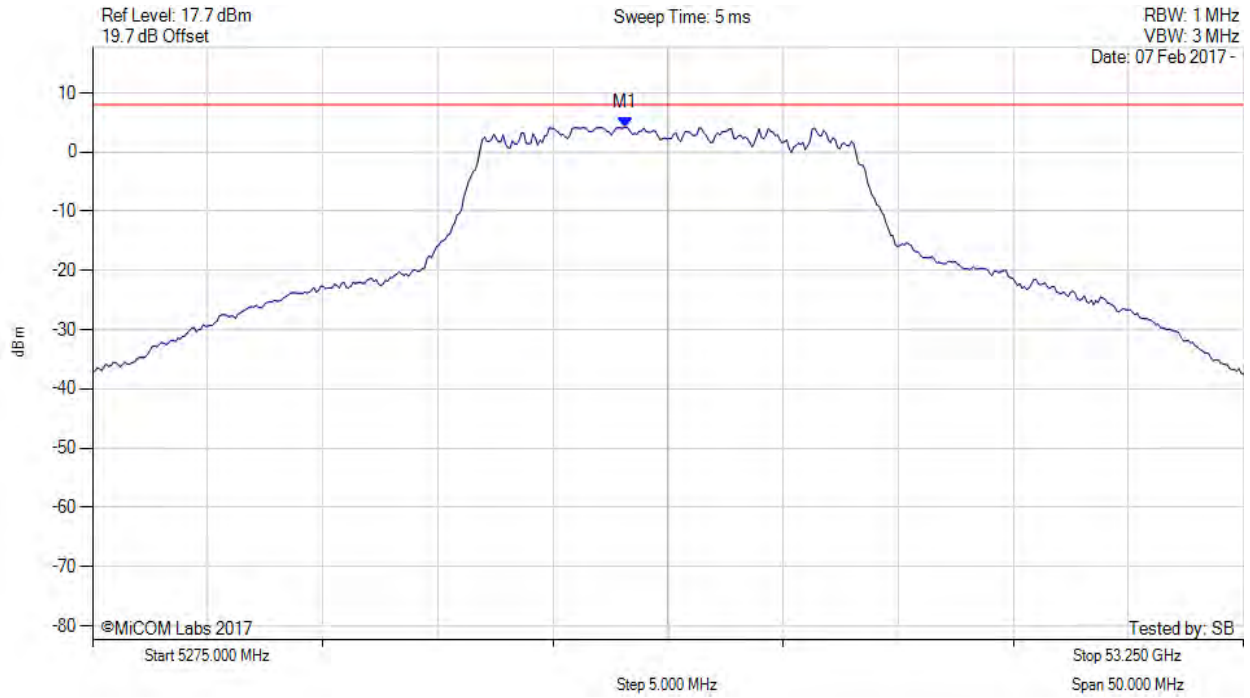

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5298.146 MHz : 4.161 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 116 of 189

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5300.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

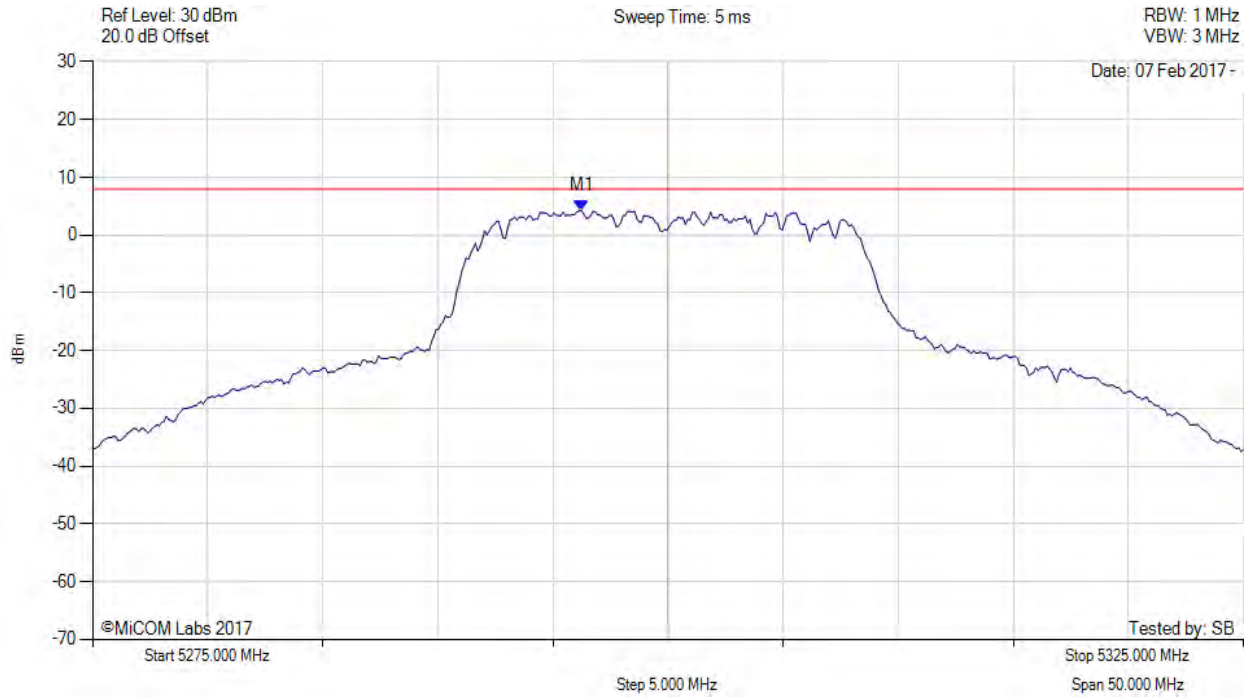

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5296.242 MHz : 4.199 dBm	Channel Frequency: 5300.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 117 of 189



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5300.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

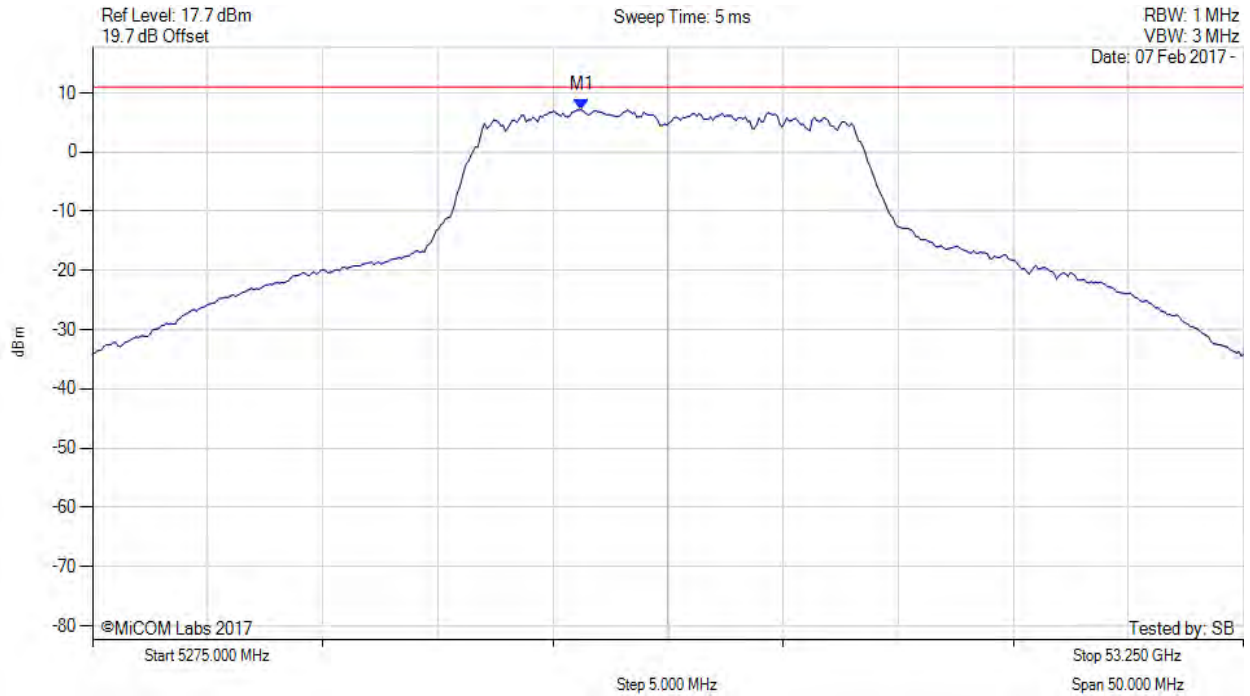

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5296.200 MHz : 7.145 dBm M1 + DCCF : 5296.200 MHz : 7.189 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 11.0 dBm Margin: -3.8 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 118 of 189

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5320.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

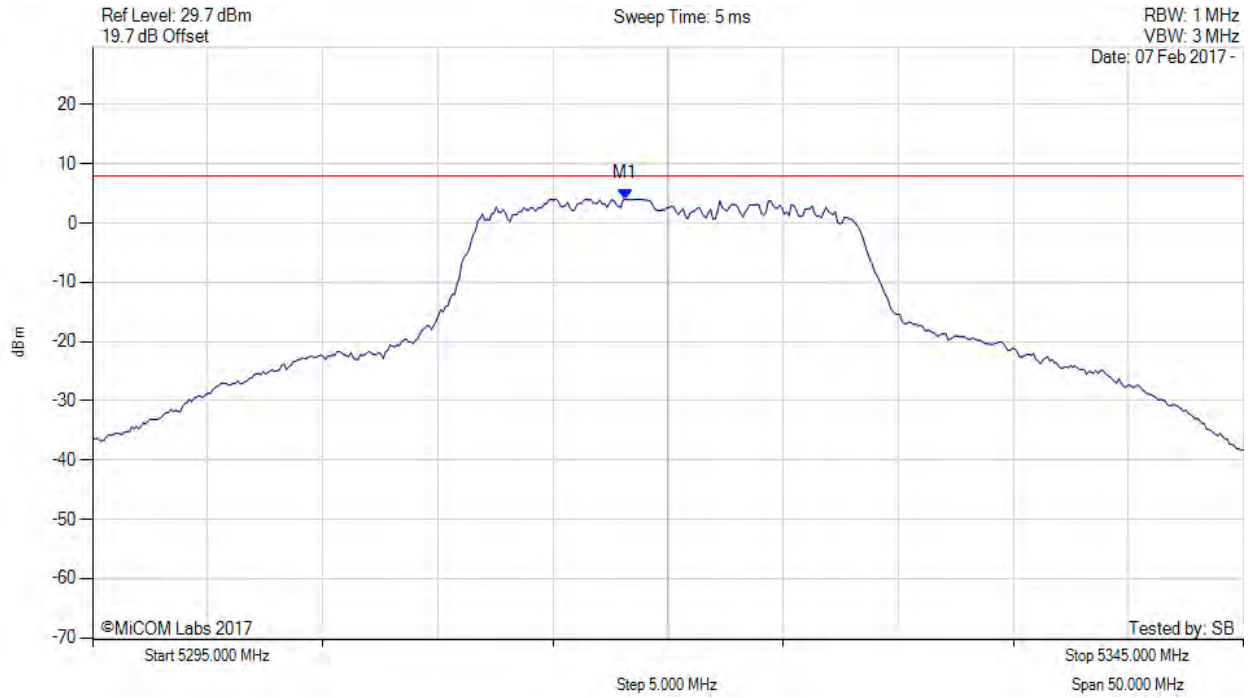

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5318.146 MHz : 4.071 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 119 of 189

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5320.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

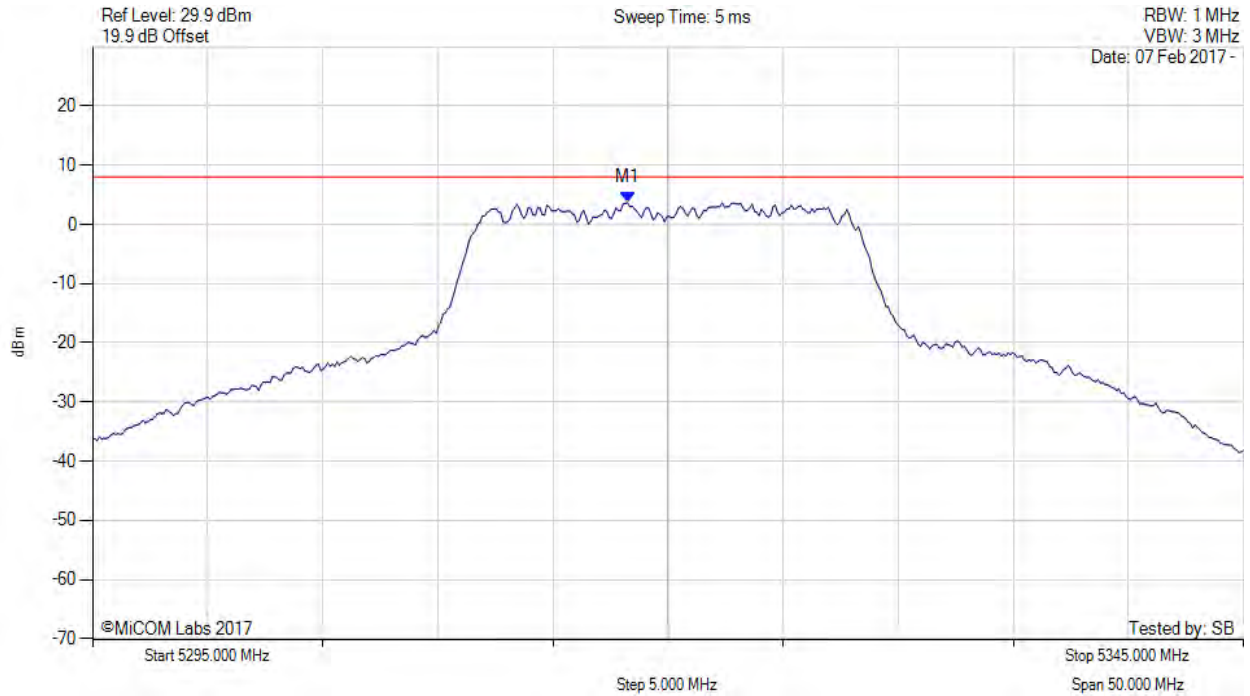

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5318.246 MHz : 3.628 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 120 of 189

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5320.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

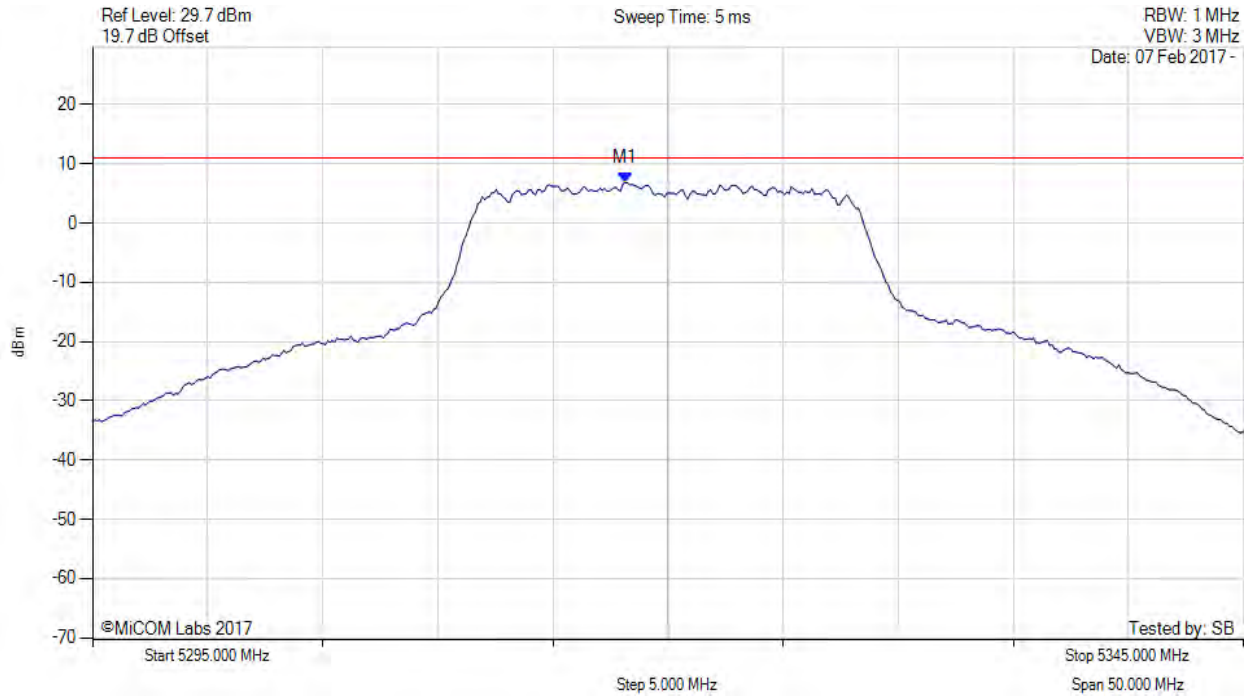

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5318.100 MHz : 6.845 dBm M1 + DCCF : 5318.100 MHz : 6.889 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 11.0 dBm Margin: -4.1 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 121 of 189

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

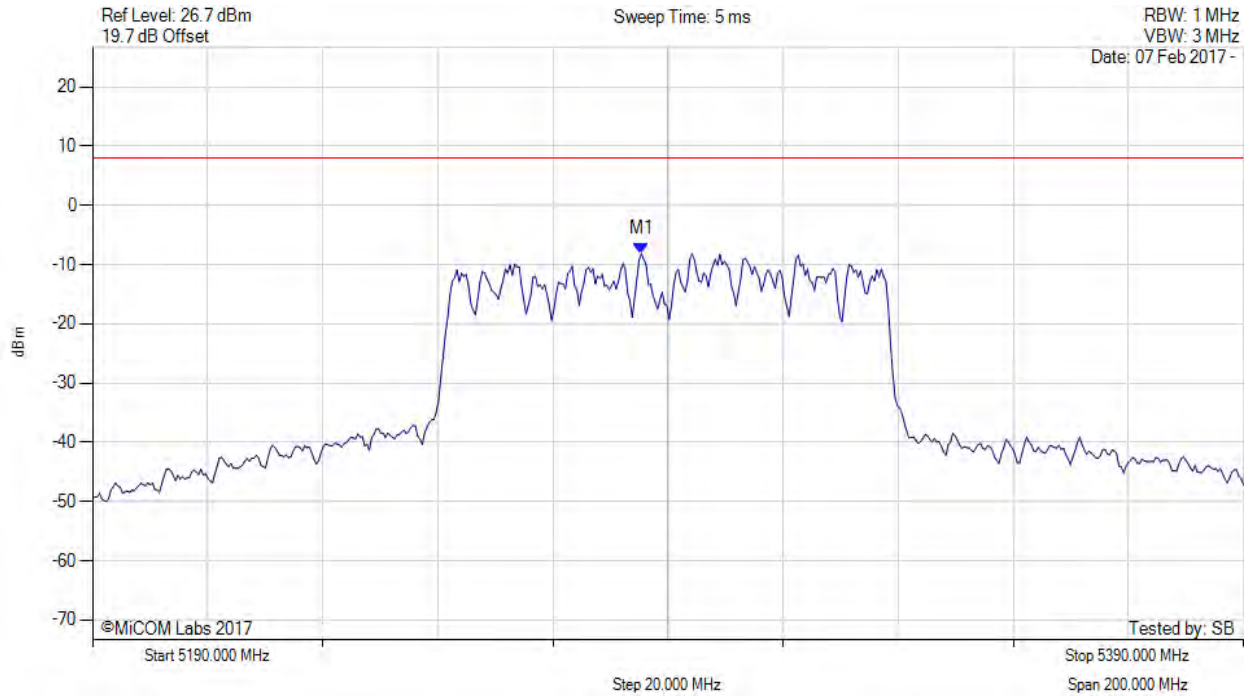

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5285.391 MHz : -8.128 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 122 of 189

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

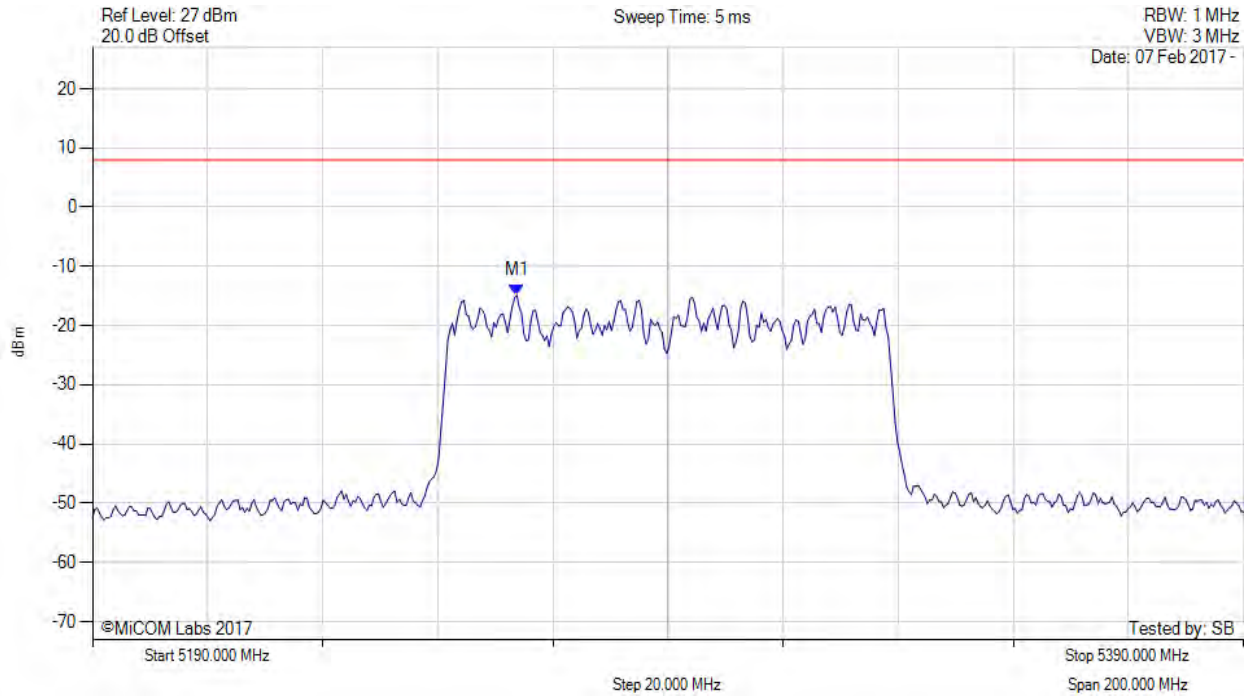

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5263.747 MHz : -14.864 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 123 of 189

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5290.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

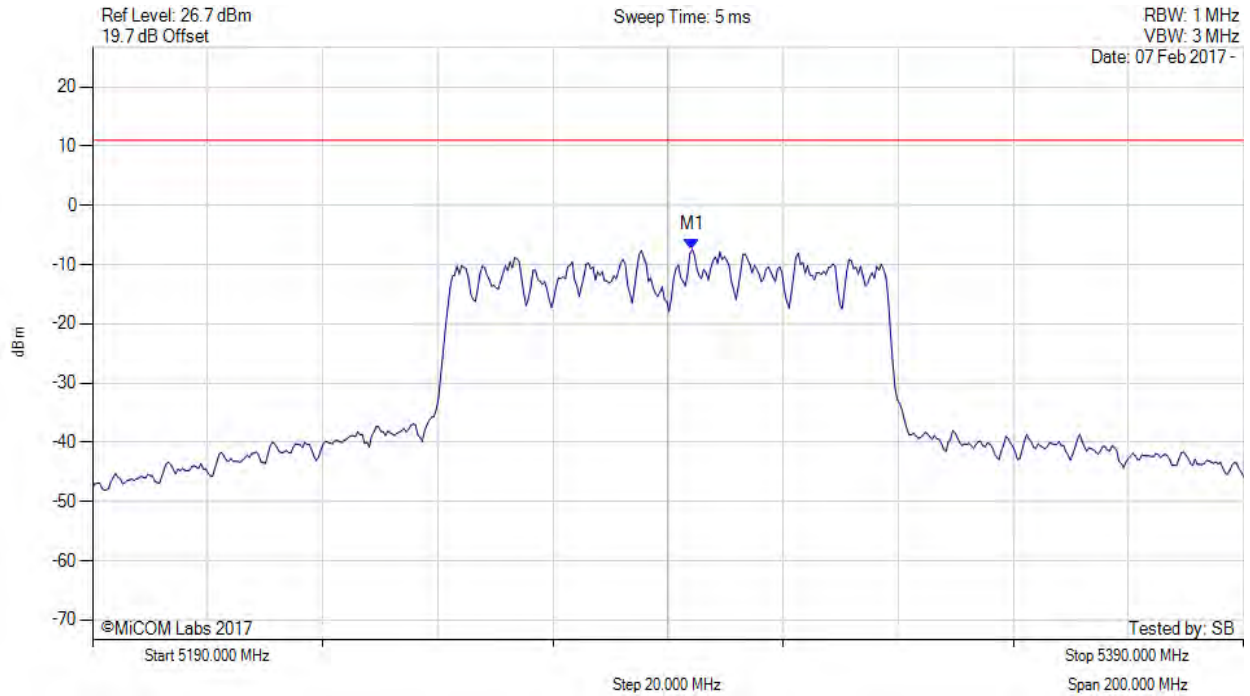

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5294.200 MHz : -7.394 dBm M1 + DCCF : 5294.200 MHz : -6.532 dBm Duty Cycle Correction Factor : +0.86 dB	Limit: ≤ 11.0 dBm Margin: -17.5 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 124 of 189

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

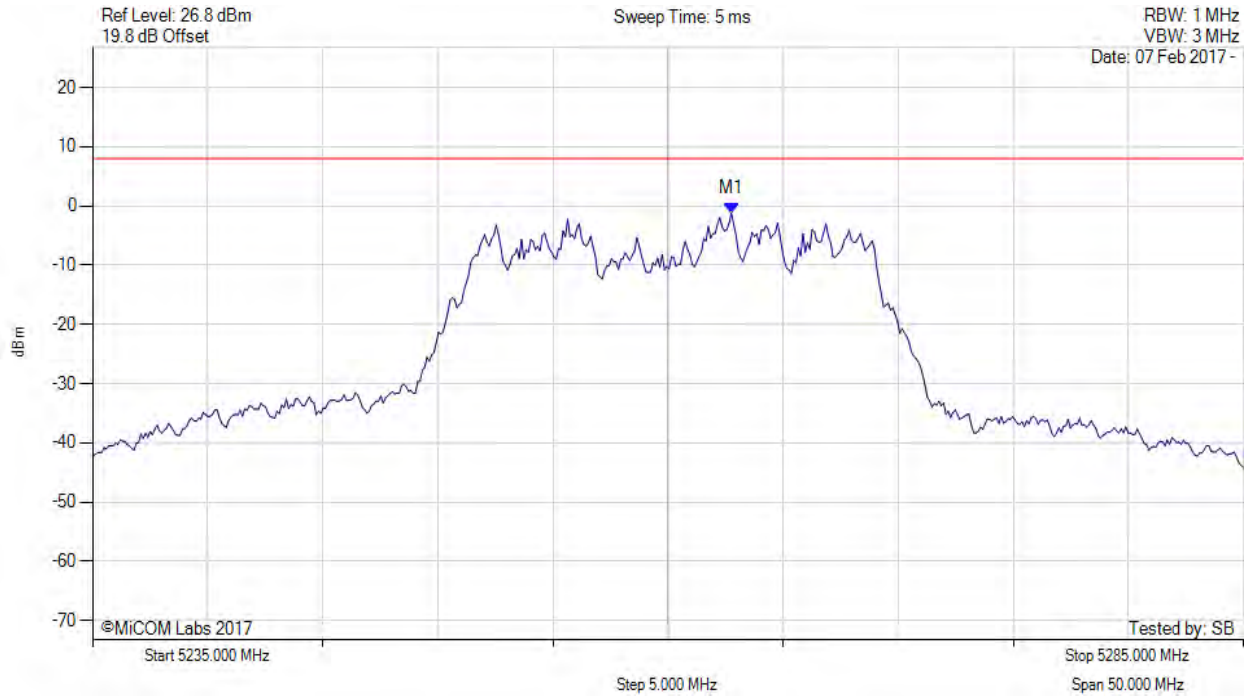

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5262.756 MHz : -1.231 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 125 of 189

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

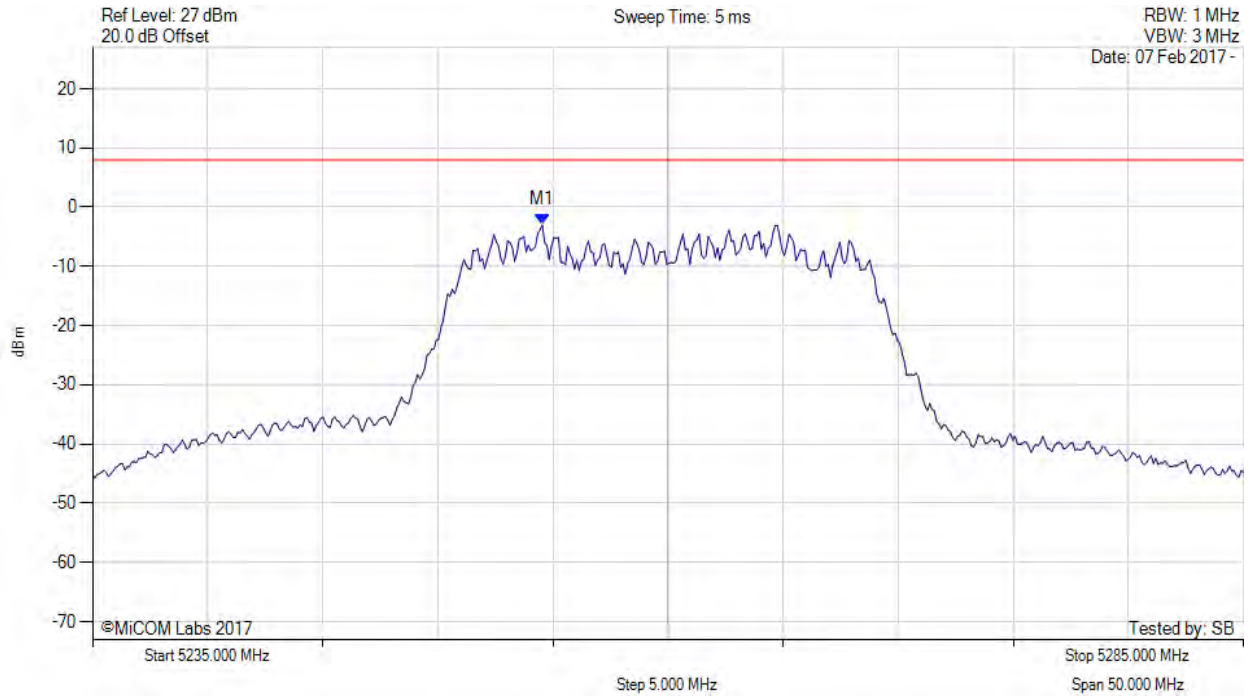

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5254.539 MHz : -2.989 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 126 of 189



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5260.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

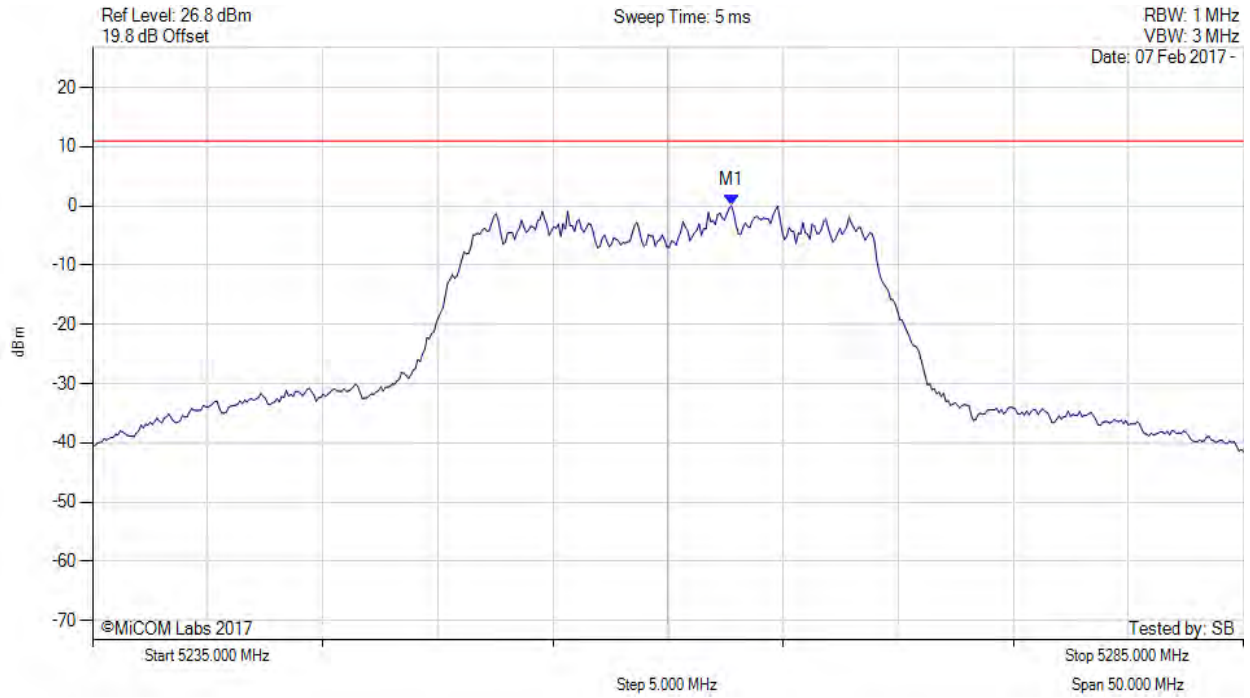

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5262.800 MHz : 0.082 dBm M1 + DCCF : 5262.800 MHz : 0.997 dBm Duty Cycle Correction Factor : +0.92 dB	Limit: ≤ 11.0 dBm Margin: -10.0 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 127 of 189

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

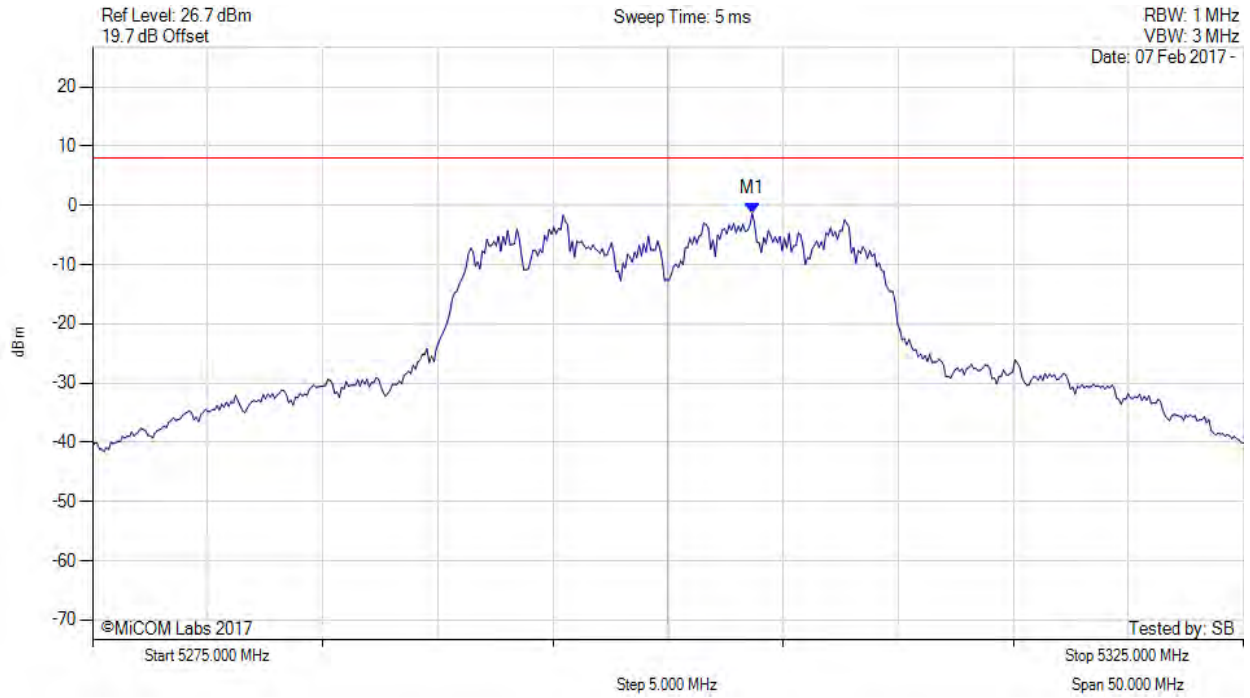

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5303.657 MHz : -1.356 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 128 of 189

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

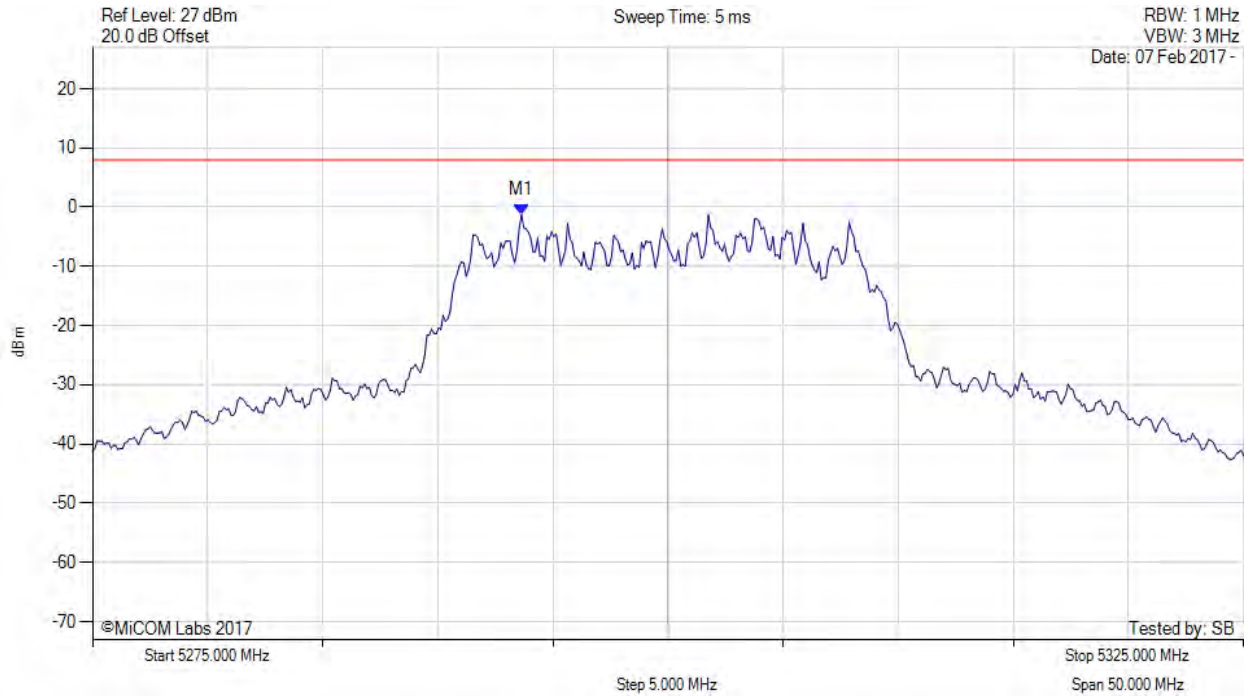

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5293.637 MHz : -1.221 dBm	Channel Frequency: 5300.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 129 of 189

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5300.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

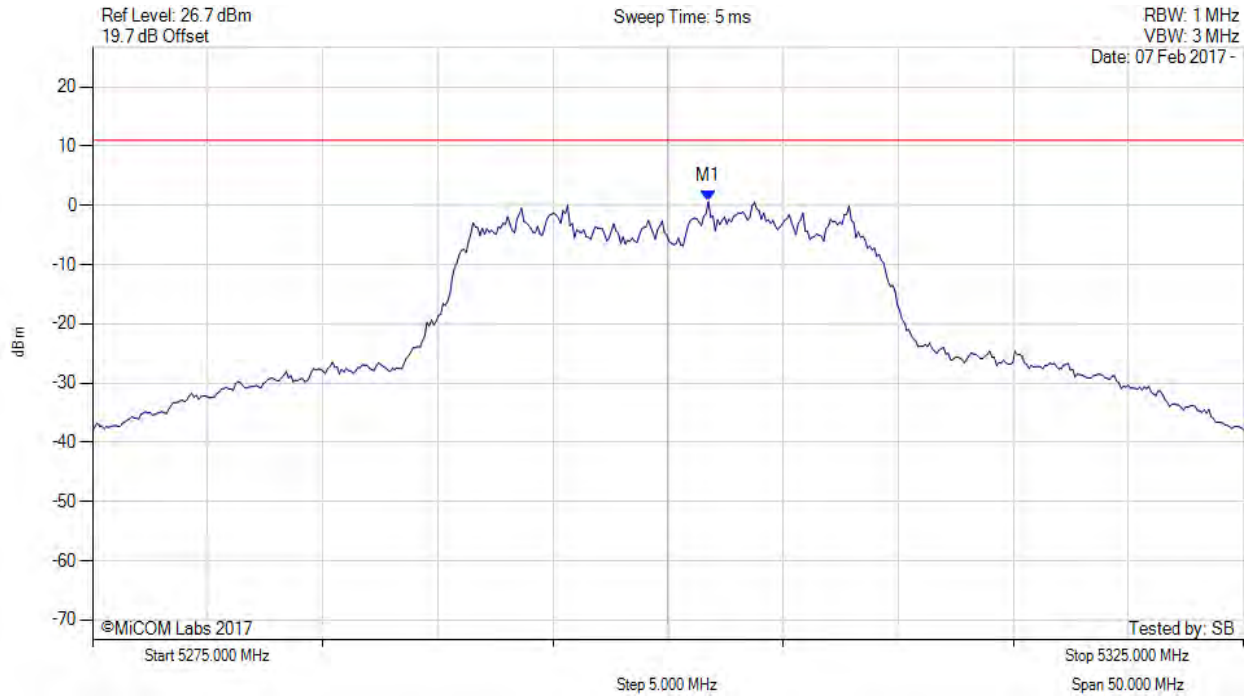

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5301.800 MHz : 0.632 dBm M1 + DCCF : 5301.800 MHz : 1.547 dBm Duty Cycle Correction Factor : +0.92 dB	Limit: ≤ 11.0 dBm Margin: -9.5 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 130 of 189

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

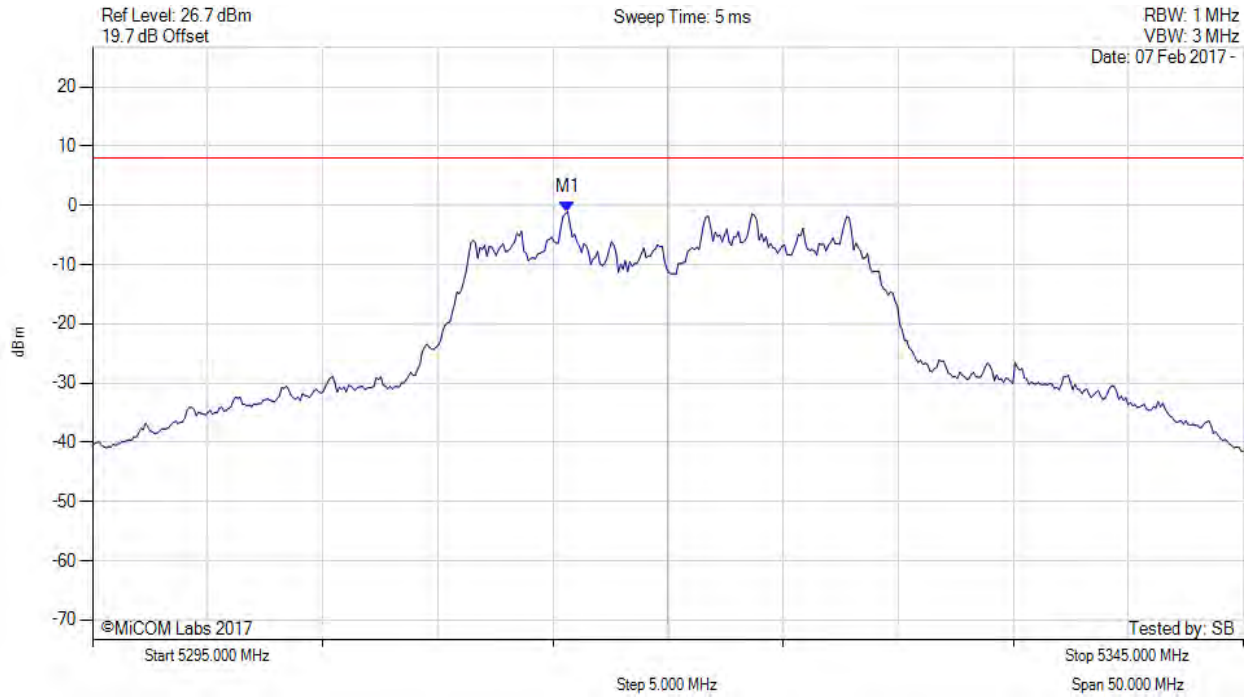

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5315.641 MHz : -1.054 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 131 of 189

POWER SPECTRAL DENSITY



Variants: 802.11n HT-20, Channel: 5320.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

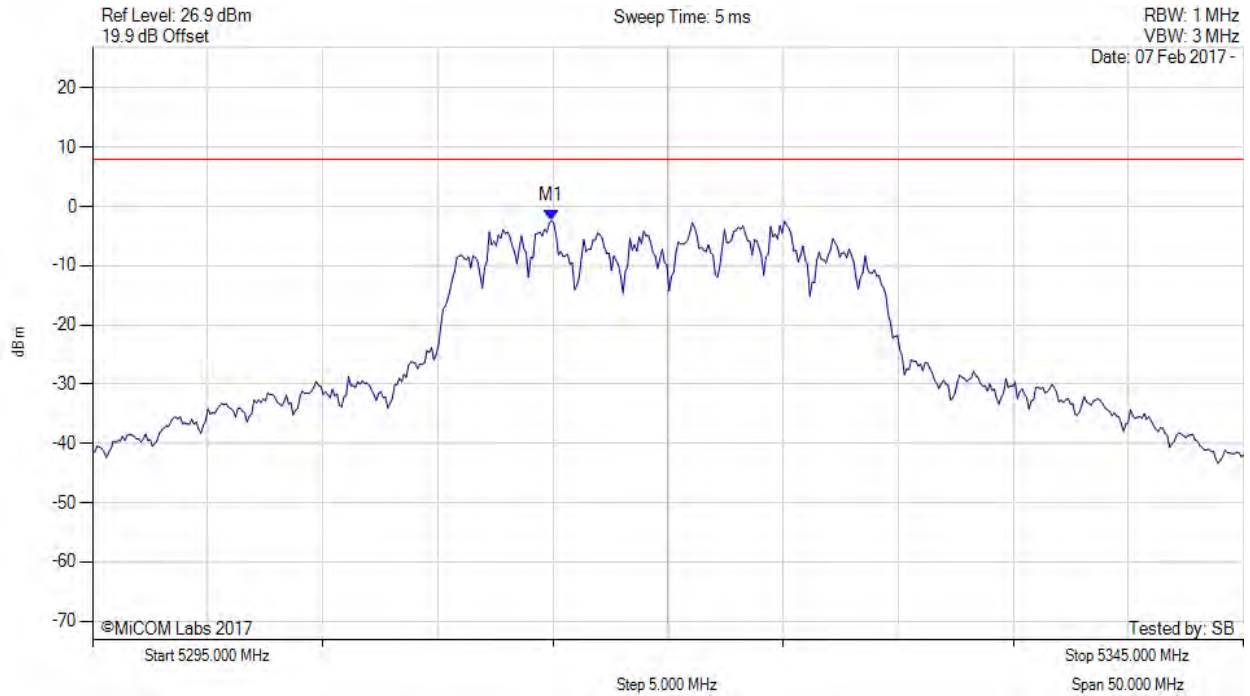

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5314.940 MHz : -2.352 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 132 of 189



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5320.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

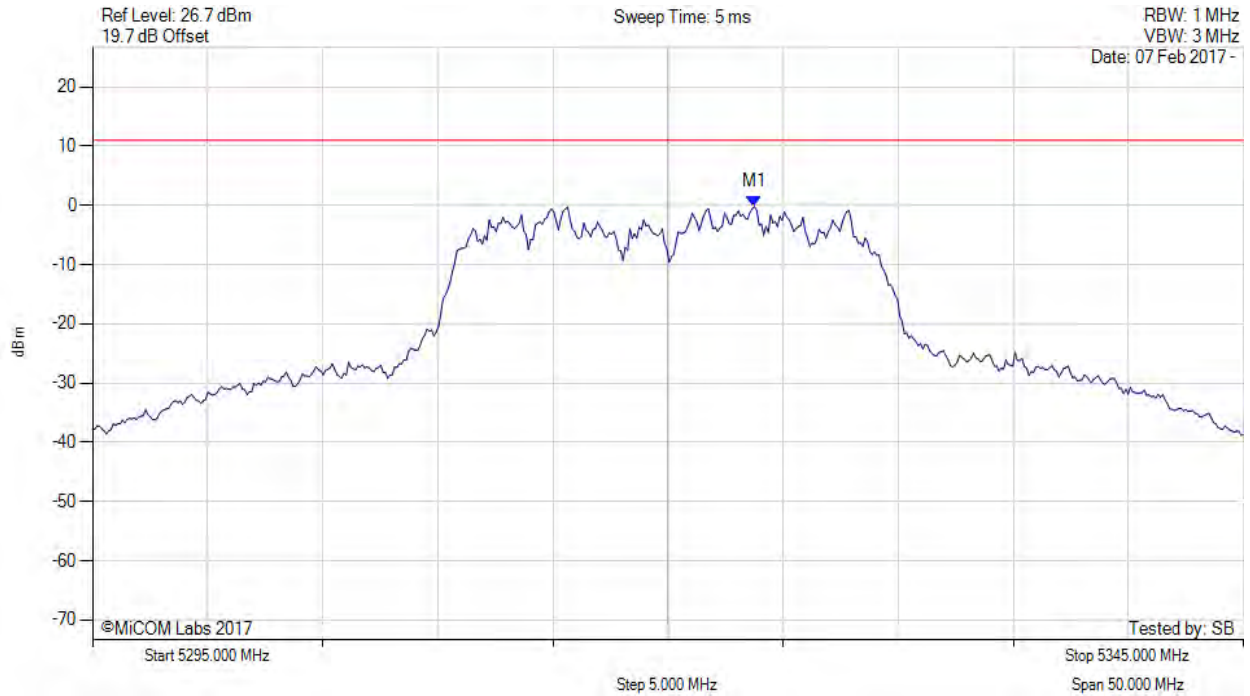

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5323.800 MHz : -0.217 dBm M1 + DCCF : 5323.800 MHz : 0.698 dBm Duty Cycle Correction Factor : +0.92 dB	Limit: ≤ 11.0 dBm Margin: -10.3 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 133 of 189

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

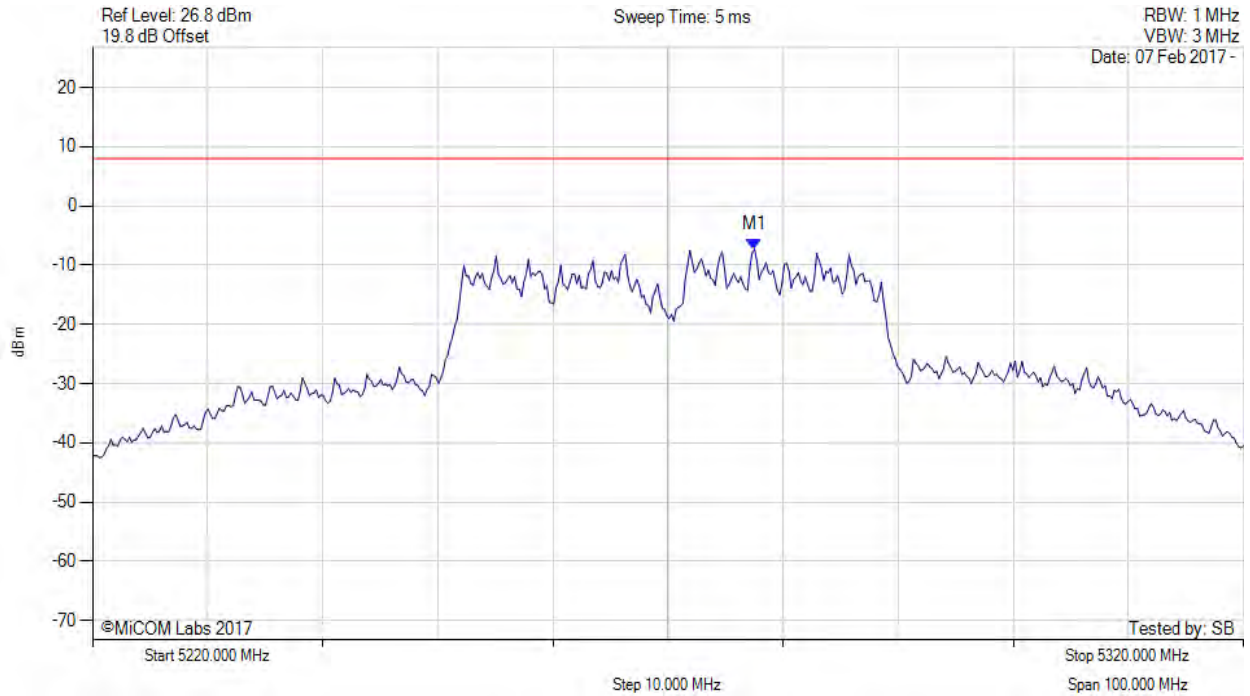

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5277.515 MHz : -7.255 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 134 of 189

POWER SPECTRAL DENSITY



Variation: 802.11n HT-40, Channel: 5270.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

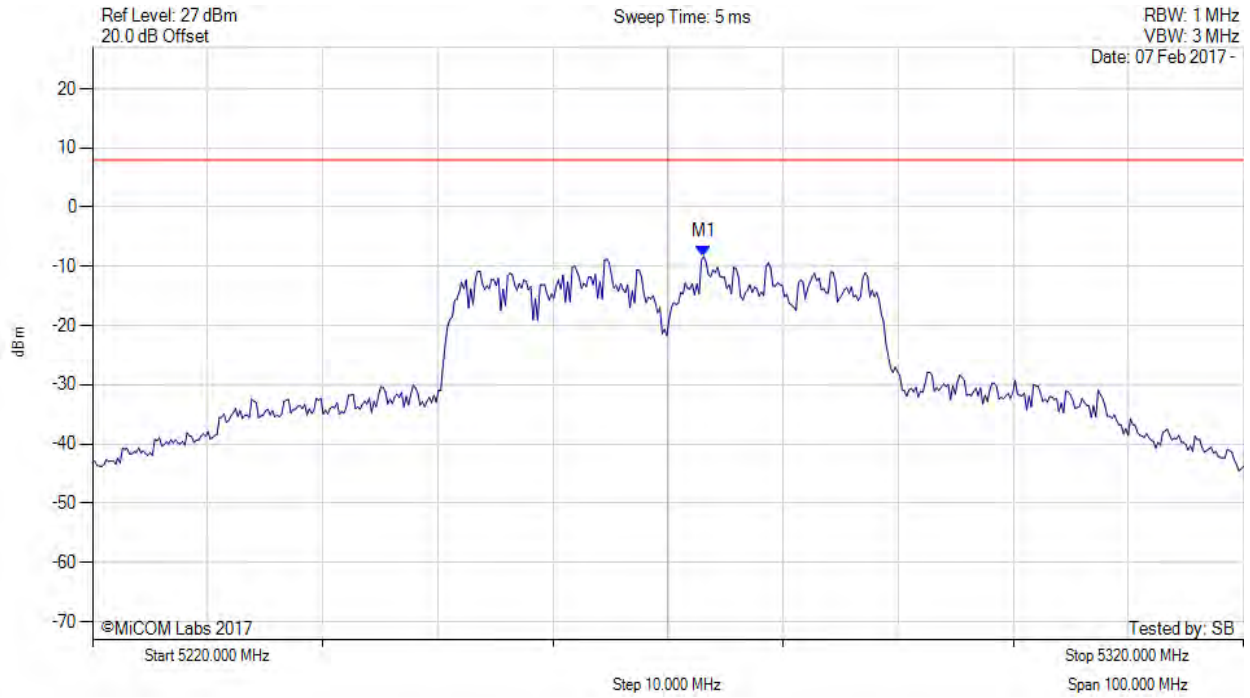

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5273.106 MHz : -8.312 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 135 of 189

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5270.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

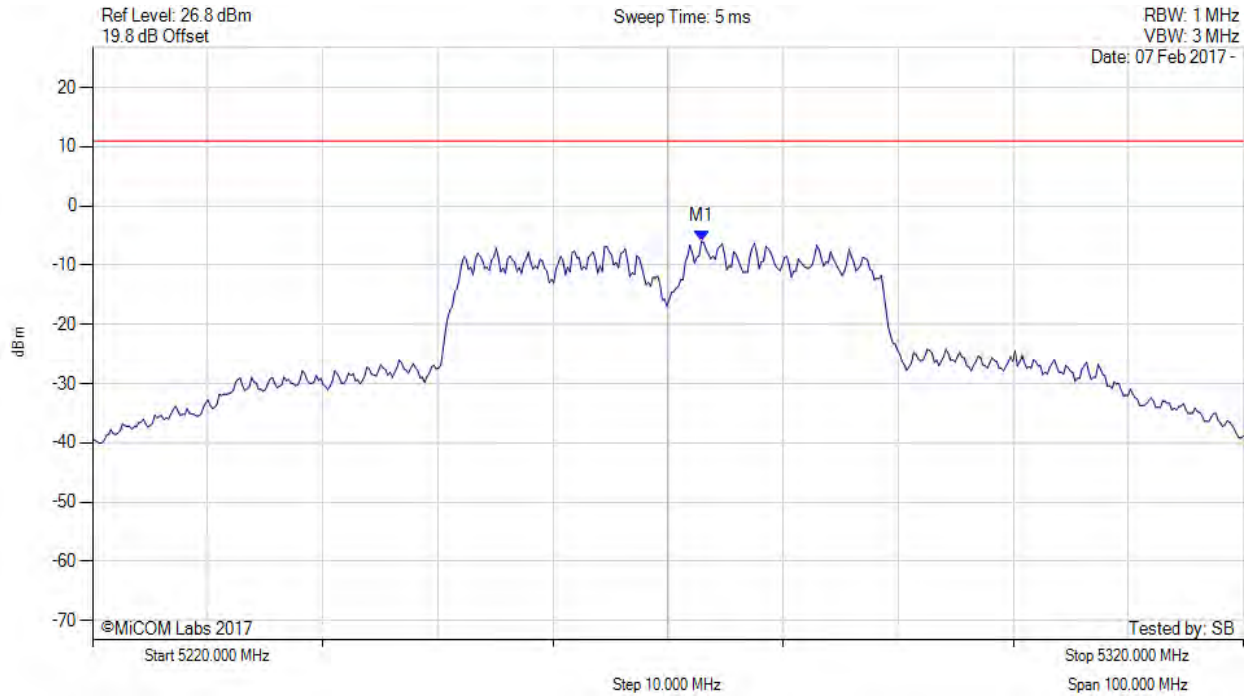

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5272.900 MHz : -5.970 dBm M1 + DCCF : 5272.900 MHz : -4.483 dBm Duty Cycle Correction Factor : +1.49 dB	Limit: ≤ 11.0 dBm Margin: -15.5 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 136 of 189

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

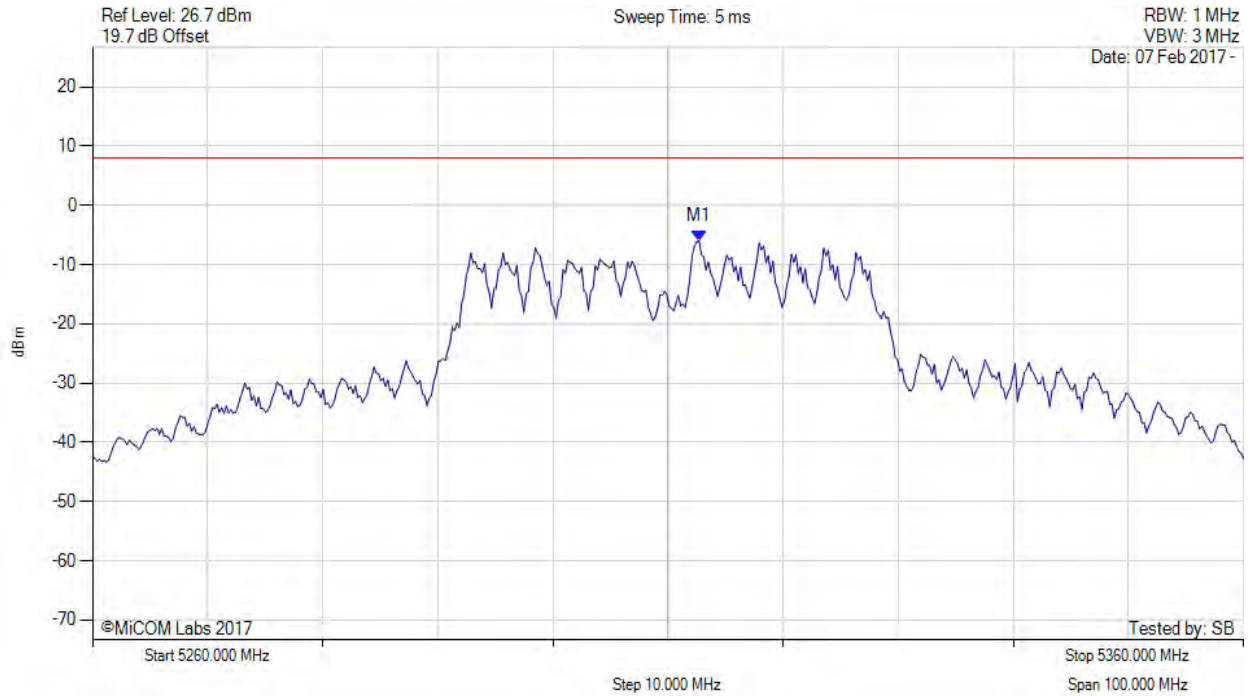

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5312.705 MHz : -6.021 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 137 of 189

POWER SPECTRAL DENSITY



Variation: 802.11n HT-40, Channel: 5310.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

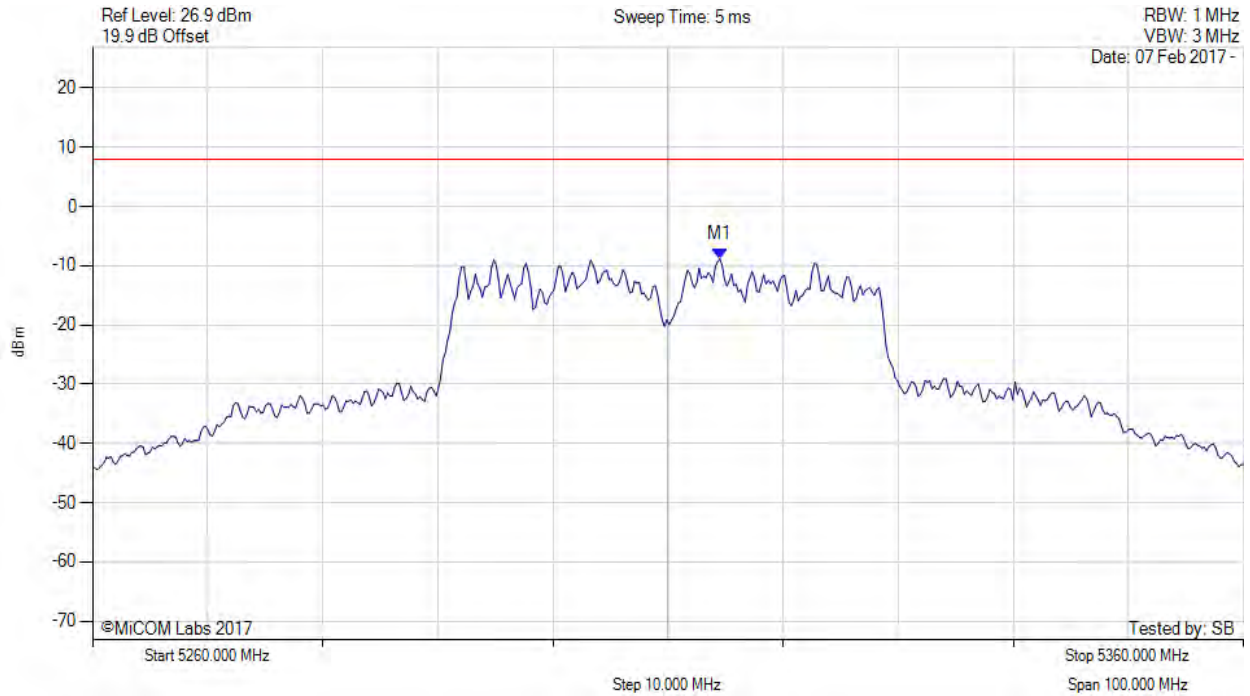

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5314.509 MHz : -8.859 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 138 of 189

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5310.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

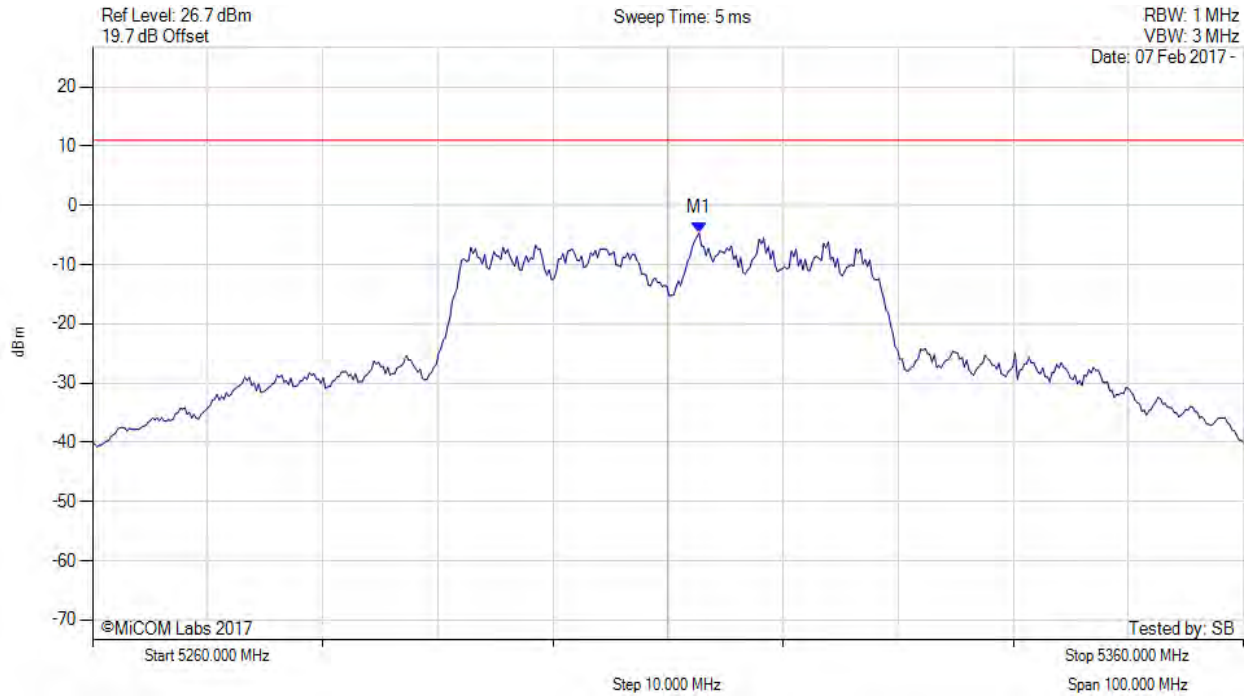

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5312.700 MHz : -4.672 dBm M1 + DCCF : 5312.700 MHz : -3.185 dBm Duty Cycle Correction Factor : +1.49 dB	Limit: ≤ 11.0 dBm Margin: -14.2 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 139 of 189

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5500.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

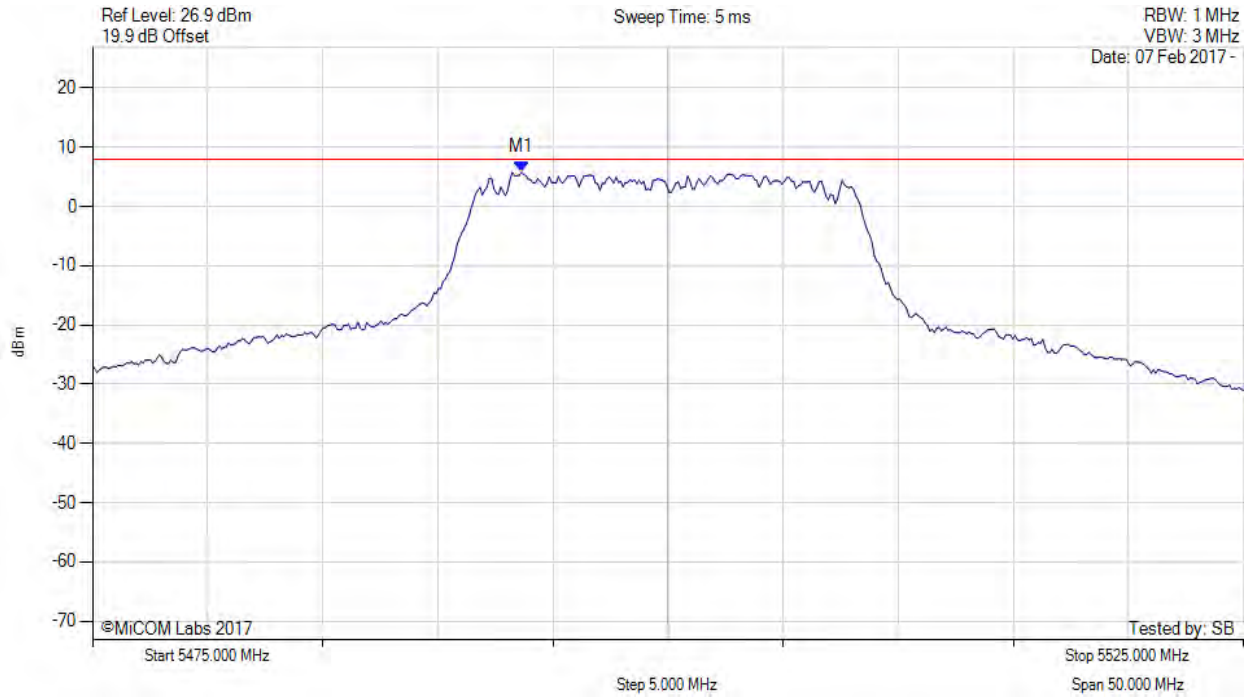

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5493.637 MHz : 5.808 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 140 of 189

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5500.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

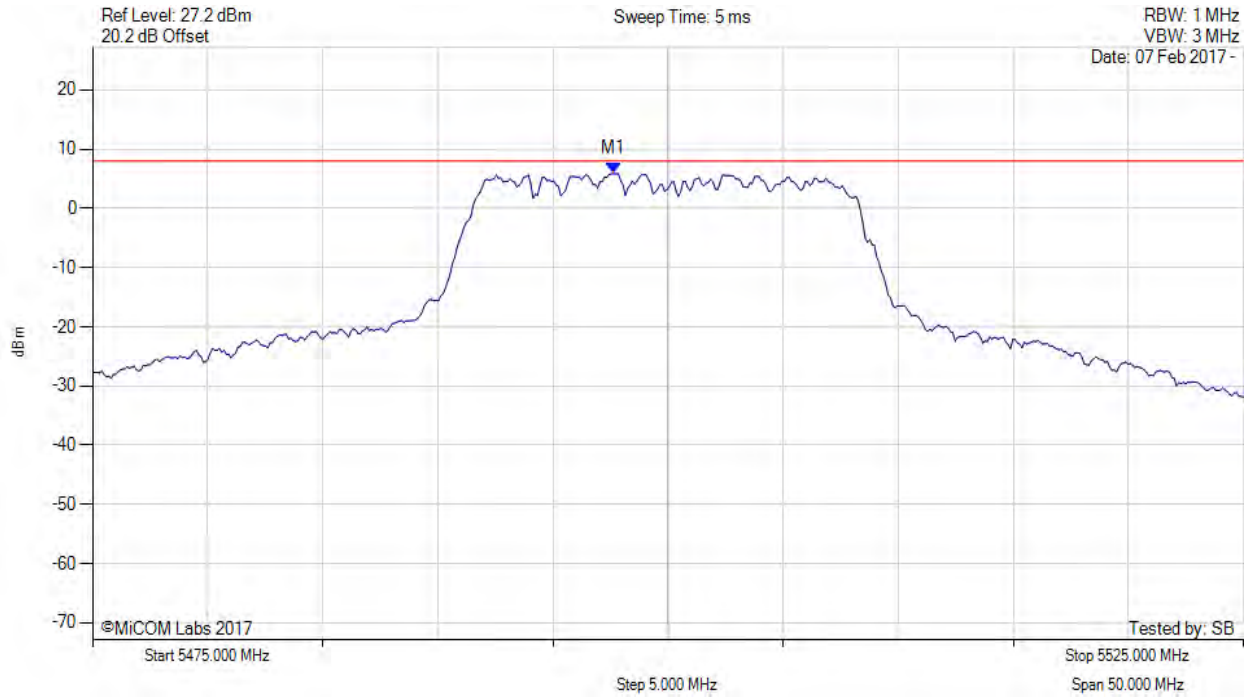

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5497.645 MHz : 5.868 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 141 of 189

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5500.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

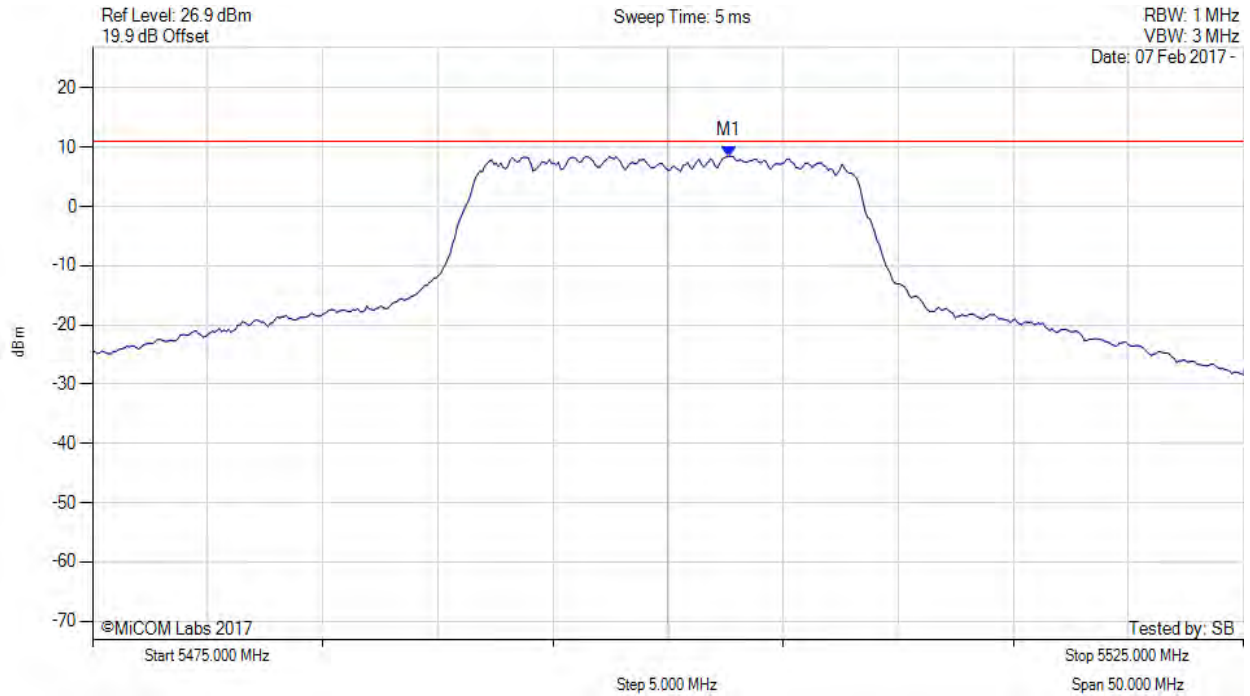

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5502.700 MHz : 8.525 dBm M1 + DCCF : 5502.700 MHz : 8.569 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 11.0 dBm Margin: -2.4 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 142 of 189

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5580.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

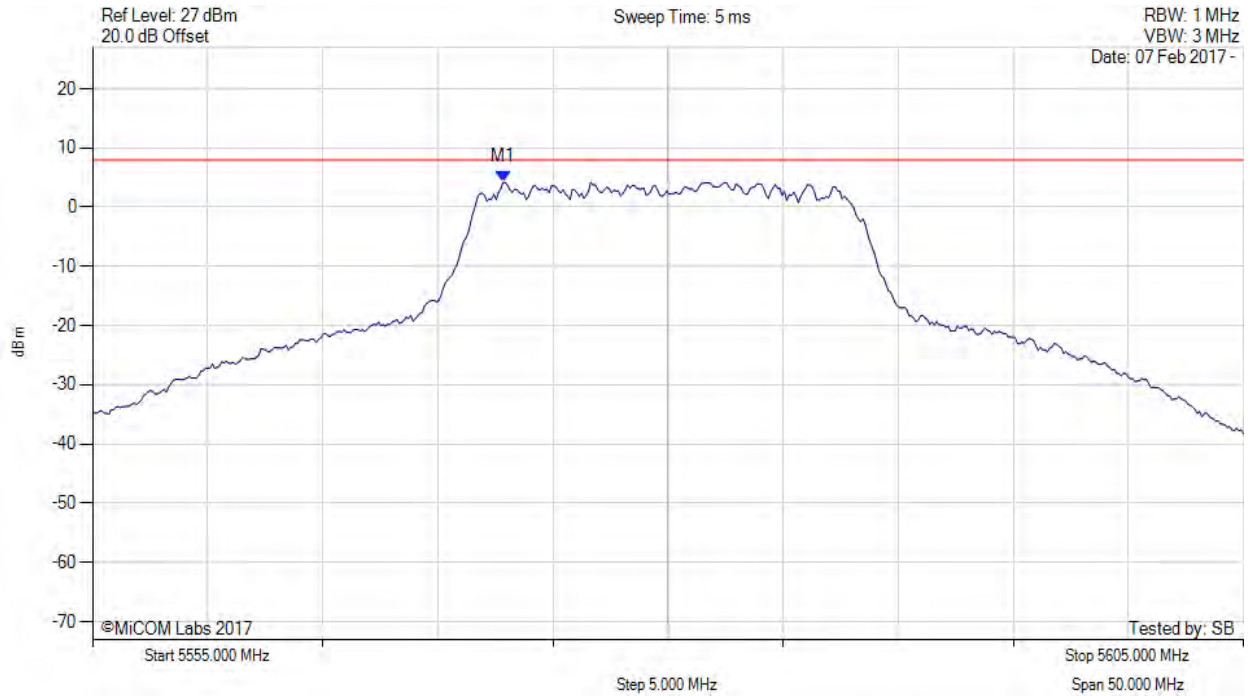

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5572.836 MHz : 4.220 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 143 of 189

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5580.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

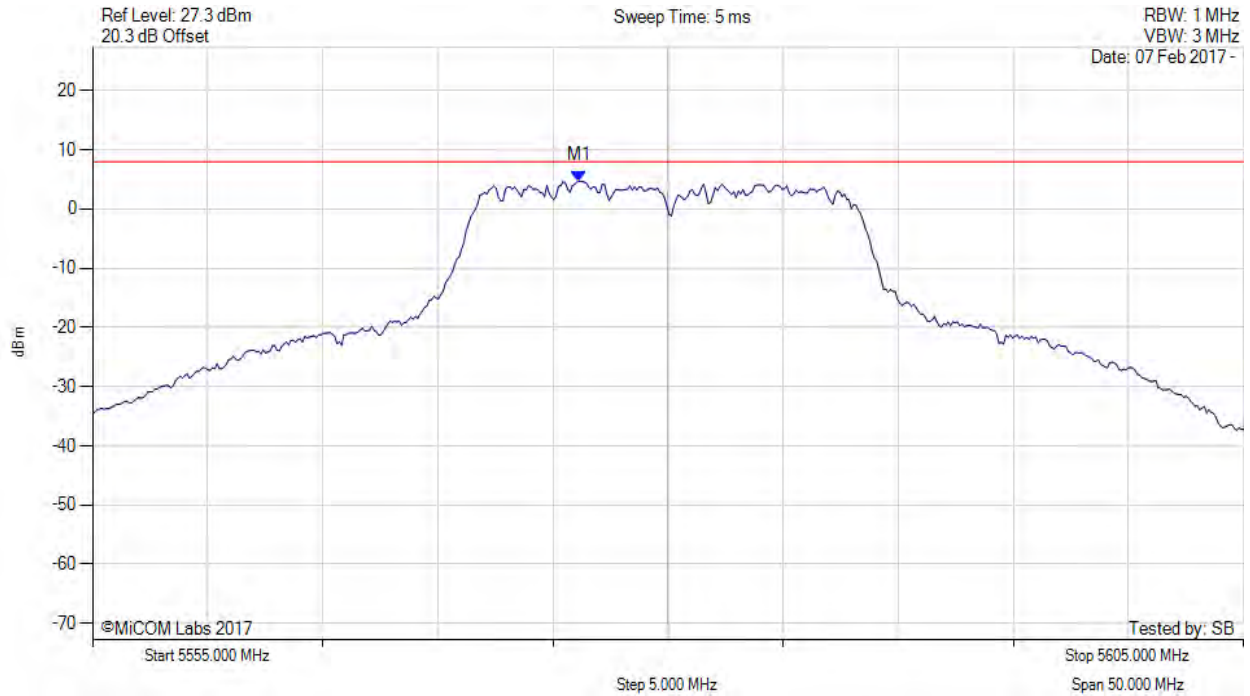

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5576.142 MHz : 4.724 dBm	Channel Frequency: 5580.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 144 of 189

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5580.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

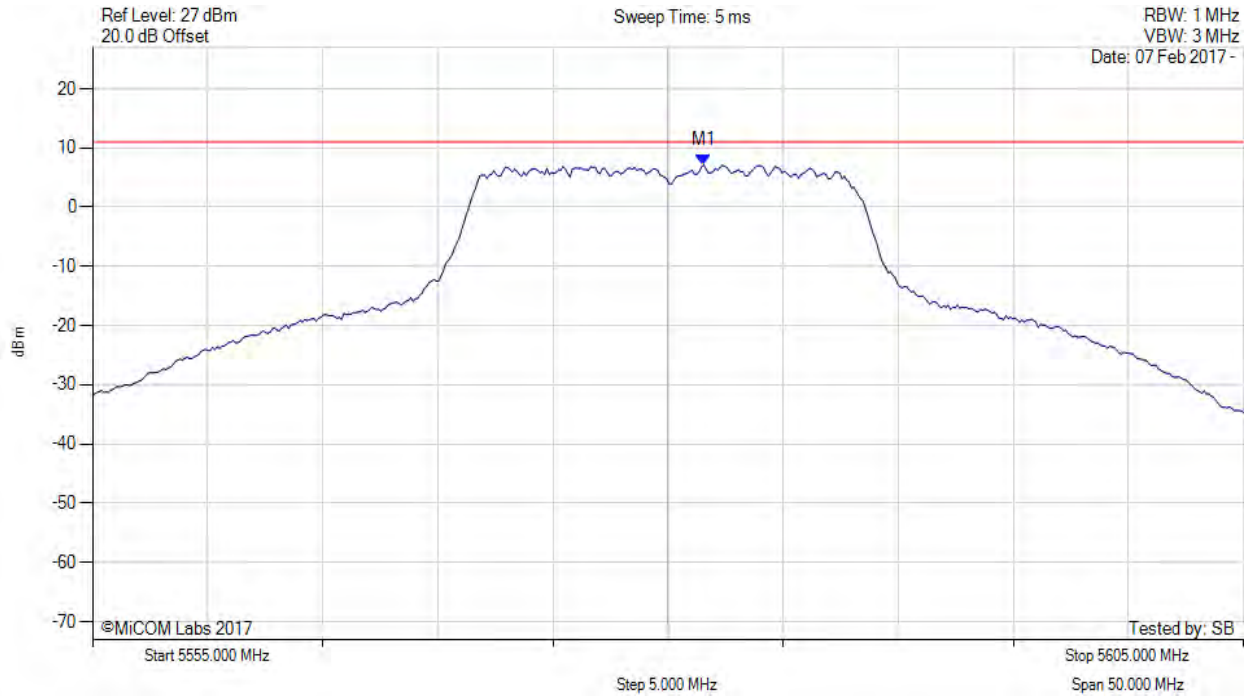

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5581.600 MHz : 7.122 dBm M1 + DCCF : 5581.600 MHz : 7.166 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 11.0 dBm Margin: -3.8 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 145 of 189

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5720.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

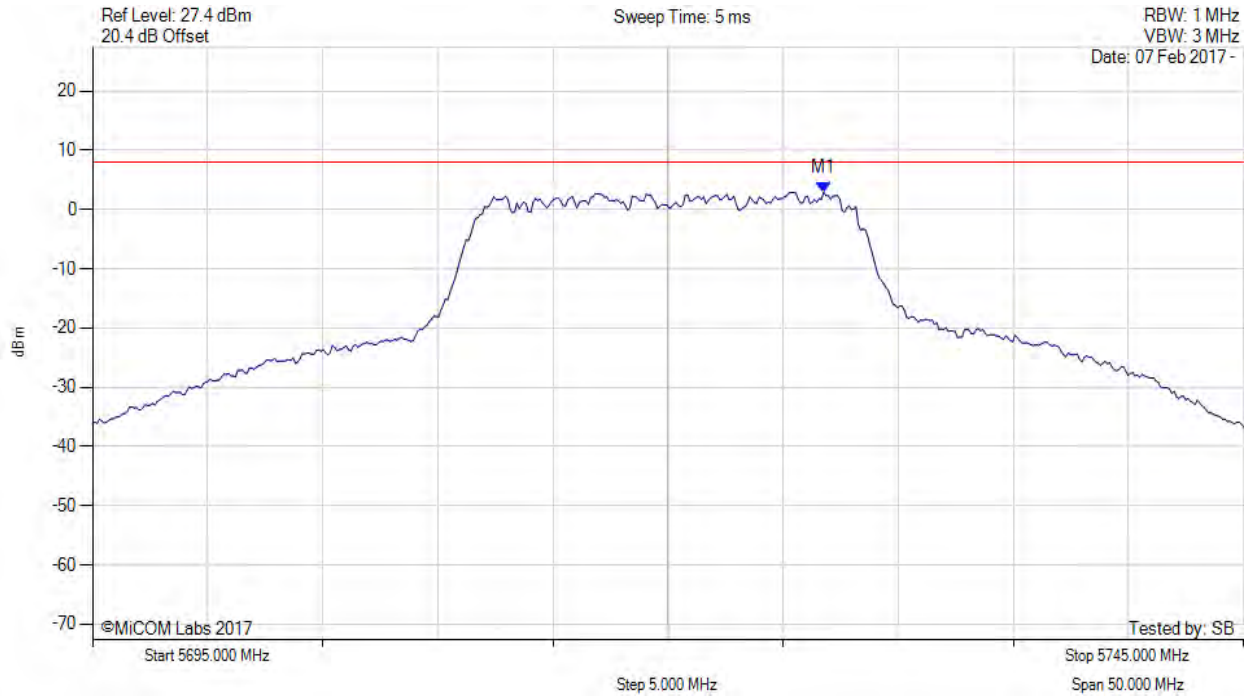

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5726.764 MHz : 2.924 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 146 of 189

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5720.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

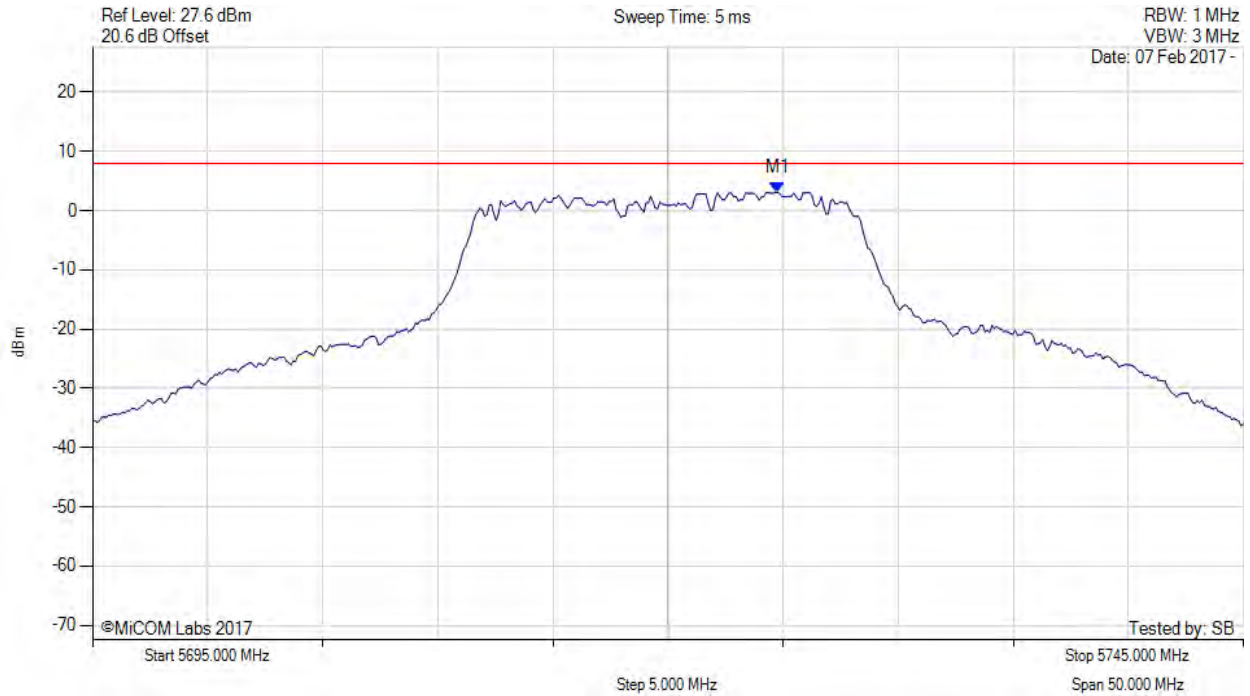

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5724.760 MHz : 3.098 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 147 of 189

POWER SPECTRAL DENSITY



Variant: 802.11a, Channel: 5720.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

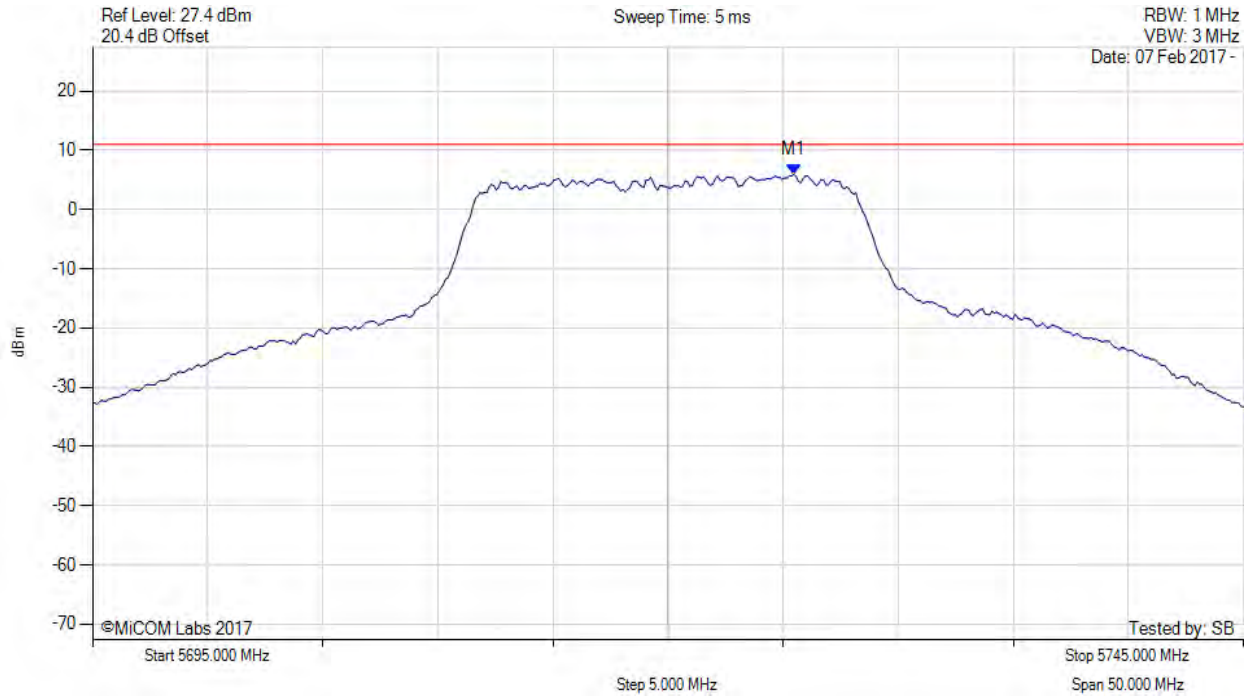

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5725.500 MHz : 5.947 dBm M1 + DCCF : 5725.500 MHz : 5.991 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 11.0 dBm Margin: -5.0 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 148 of 189

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5530.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

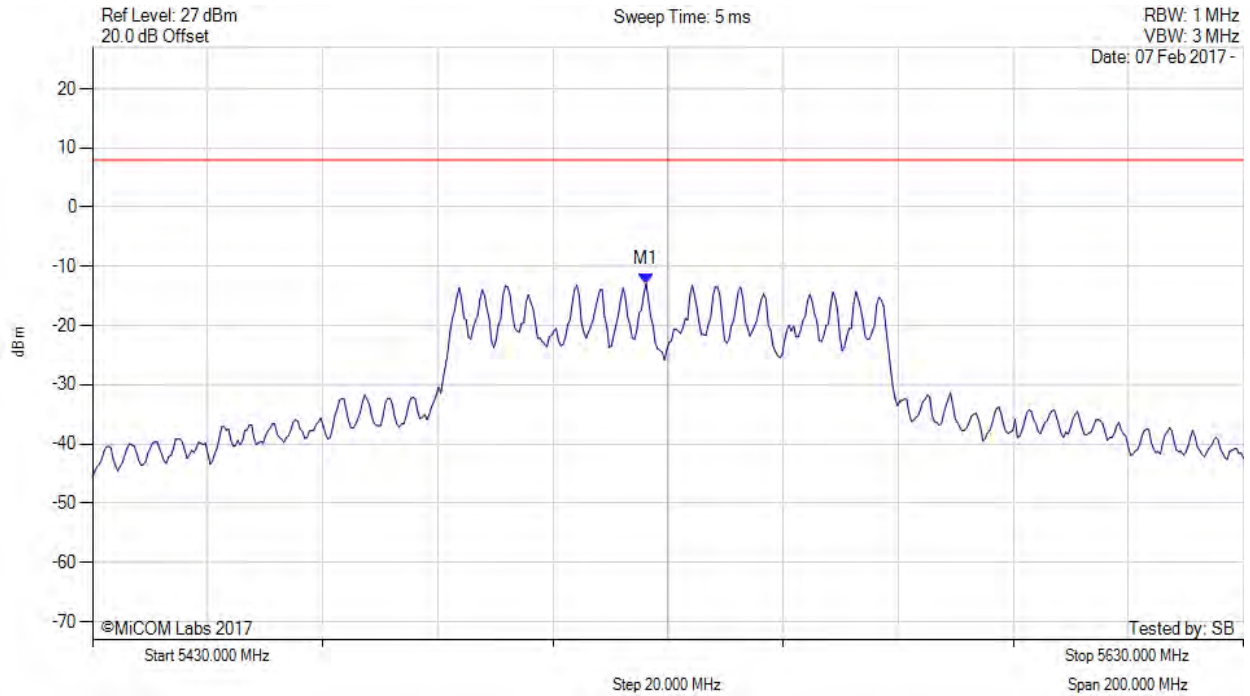

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5526.192 MHz : -12.902 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 149 of 189

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5530.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

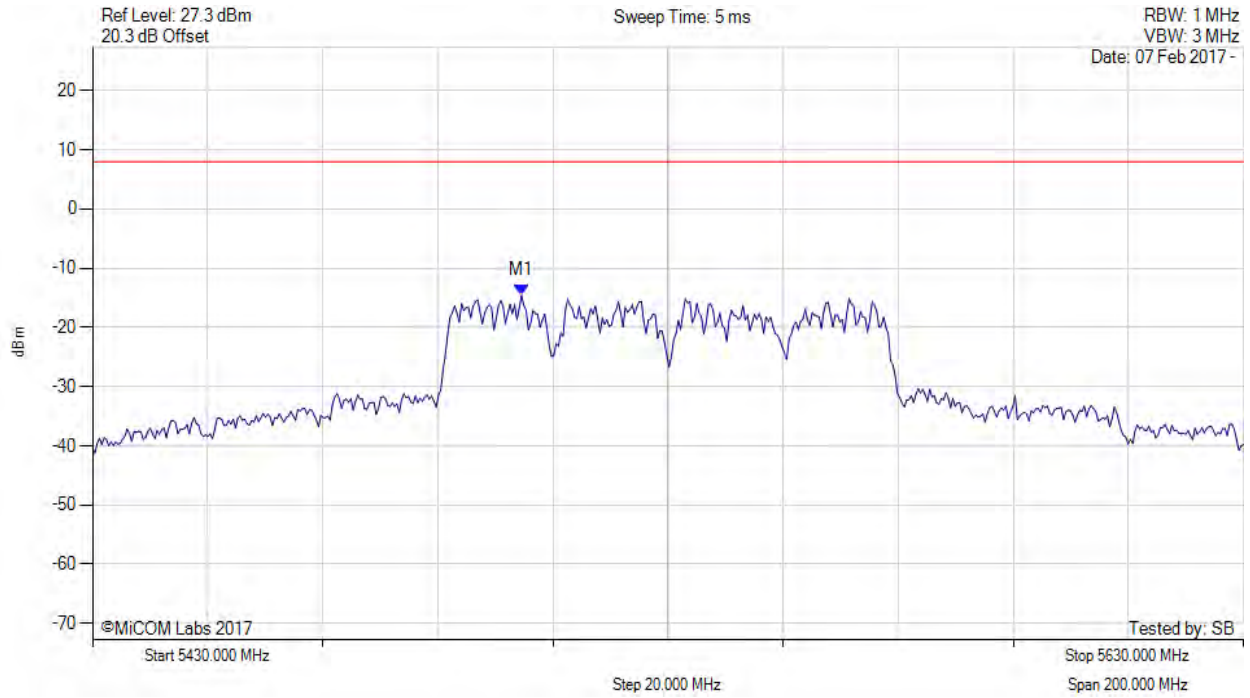

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5504.549 MHz : -14.593 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 150 of 189

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5530.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

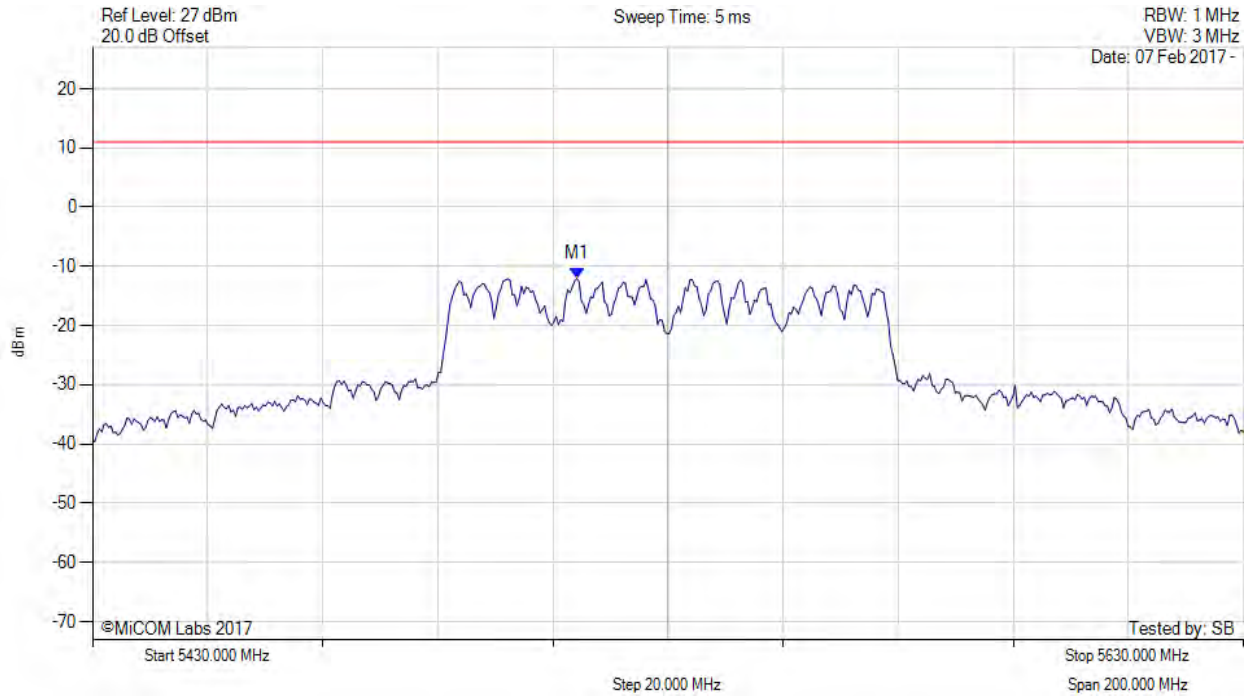

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5514.200 MHz : -12.055 dBm M1 + DCCF : 5514.200 MHz : -10.048 dBm Duty Cycle Correction Factor : +2.01 dB	Limit: ≤ 11.0 dBm Margin: -21.1 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 151 of 189

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5610.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

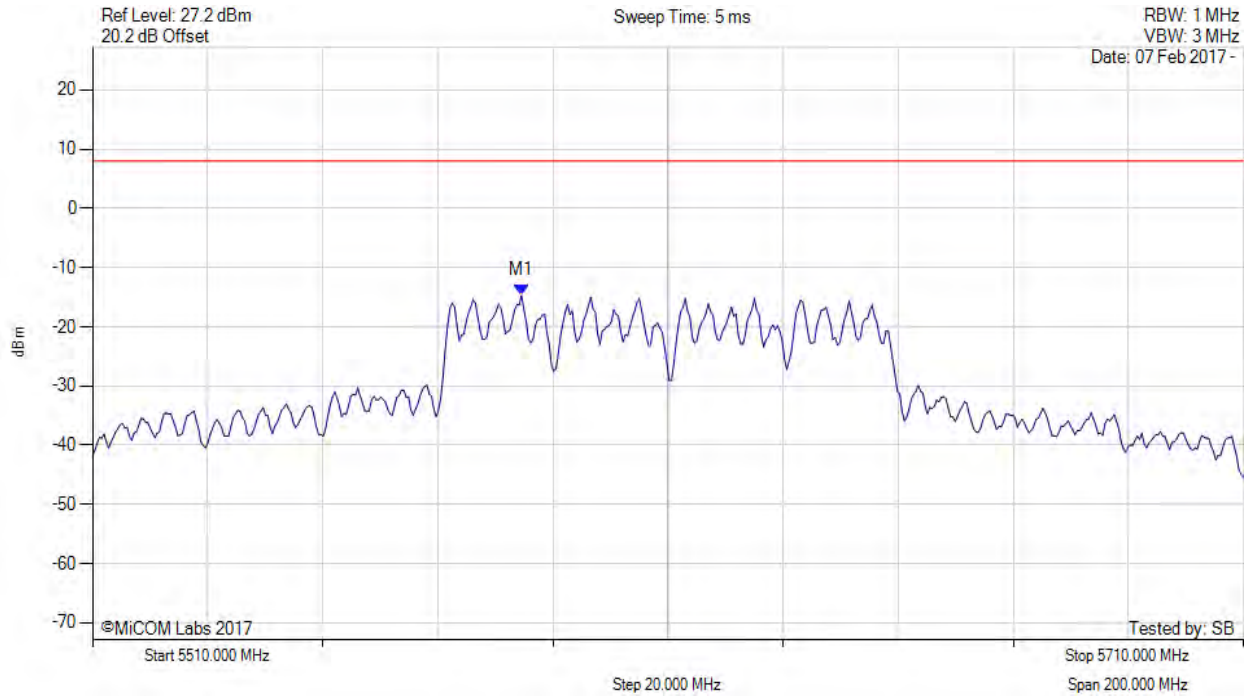

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5584.549 MHz : -14.727 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 152 of 189

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5610.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

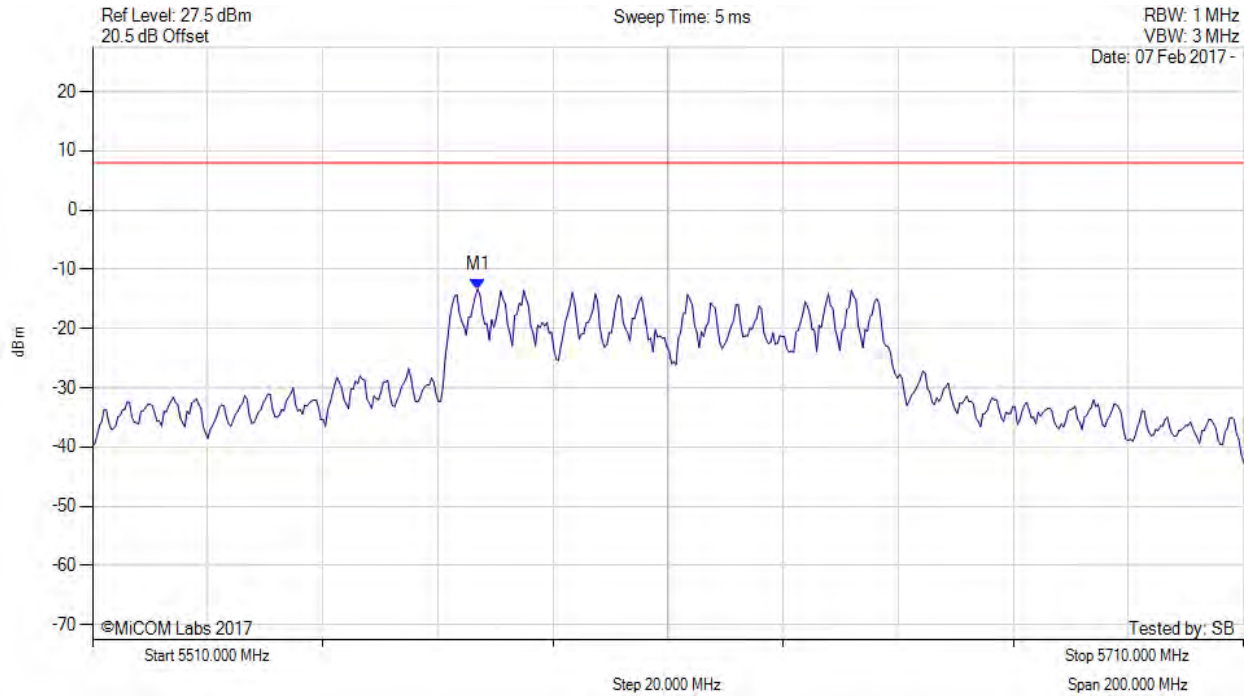

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5576.934 MHz : -13.339 dBm	Channel Frequency: 5610.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 153 of 189

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5610.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

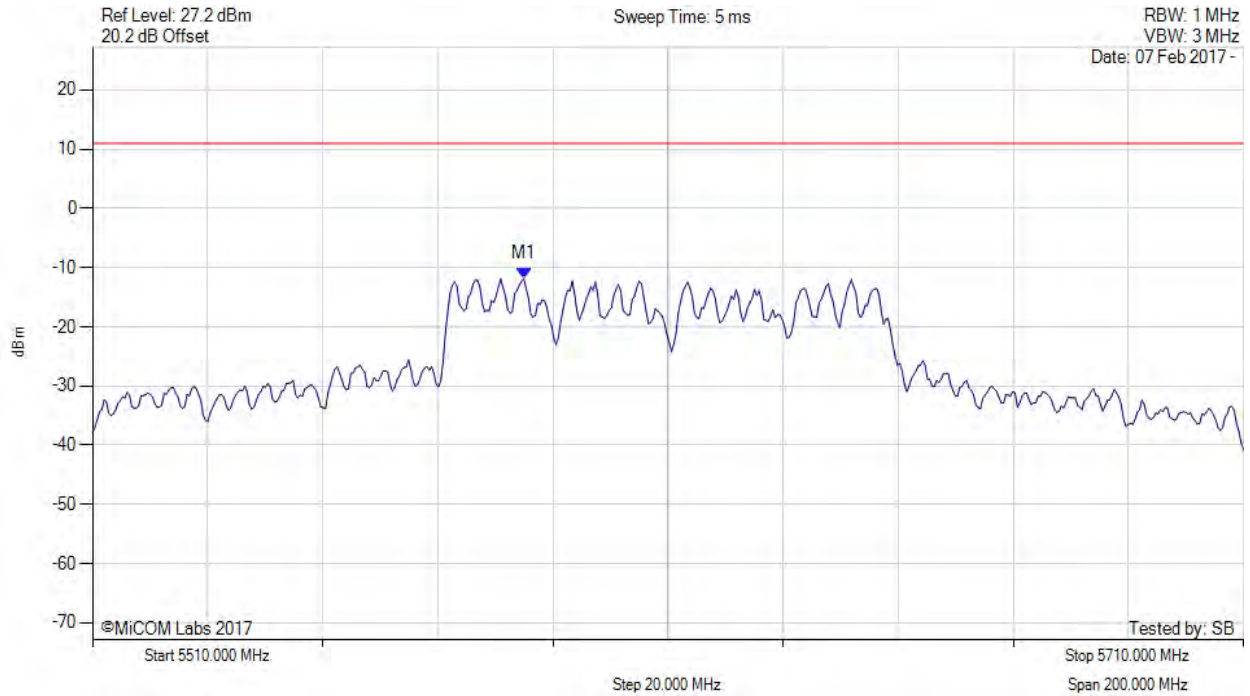

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5584.900 MHz : -11.887 dBm M1 + DCCF : 5584.900 MHz : -9.880 dBm Duty Cycle Correction Factor : +2.01 dB	Limit: ≤ 11.0 dBm Margin: -20.9 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 154 of 189



POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5690.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

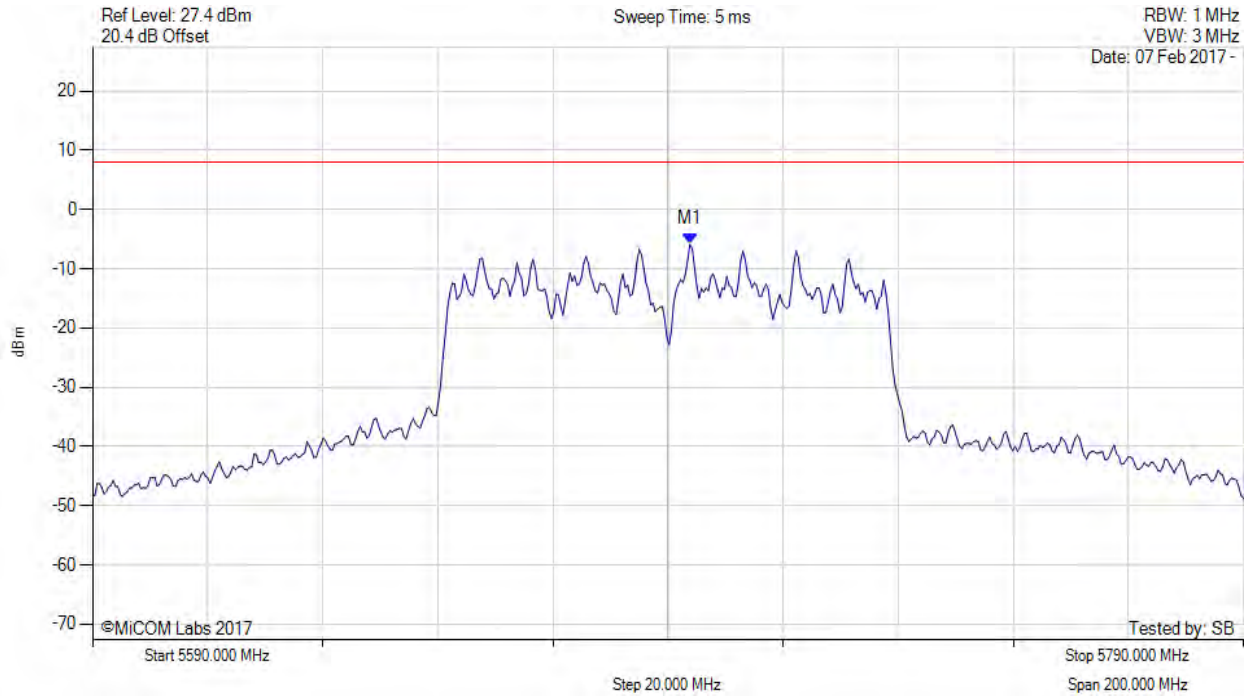

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5693.808 MHz : -5.863 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 155 of 189

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5690.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

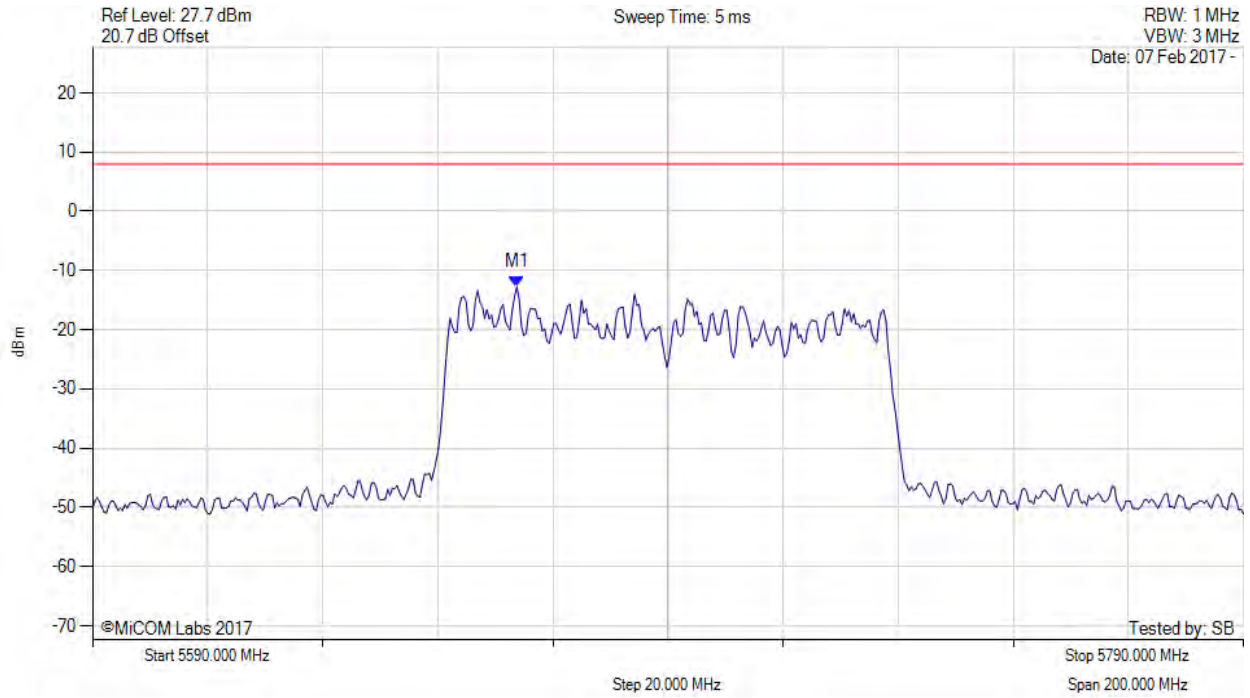

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5663.747 MHz : -12.801 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 156 of 189

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5690.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

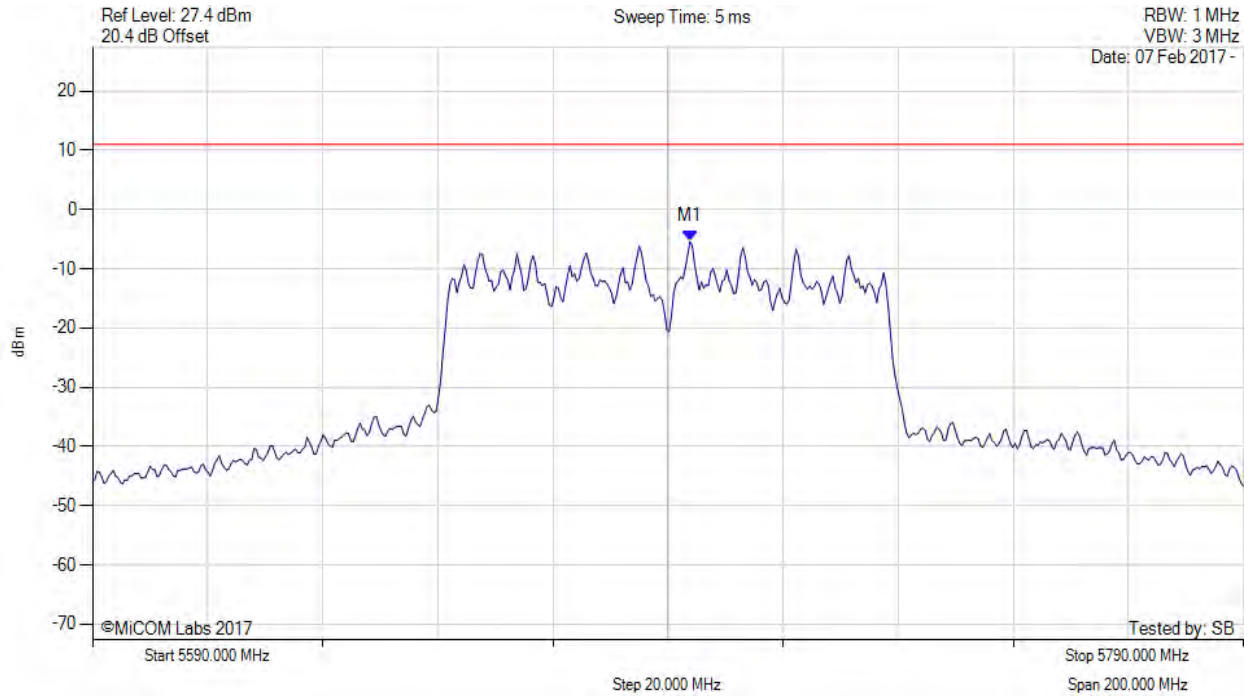

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5693.800 MHz : -5.428 dBm M1 + DCCF : 5693.800 MHz : -3.421 dBm Duty Cycle Correction Factor : +2.01 dB	Limit: ≤ 11.0 dBm Margin: -14.4 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 157 of 189



POWER SPECTRAL DENSITY

Variants: 802.11n HT-20, Channel: 5500.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

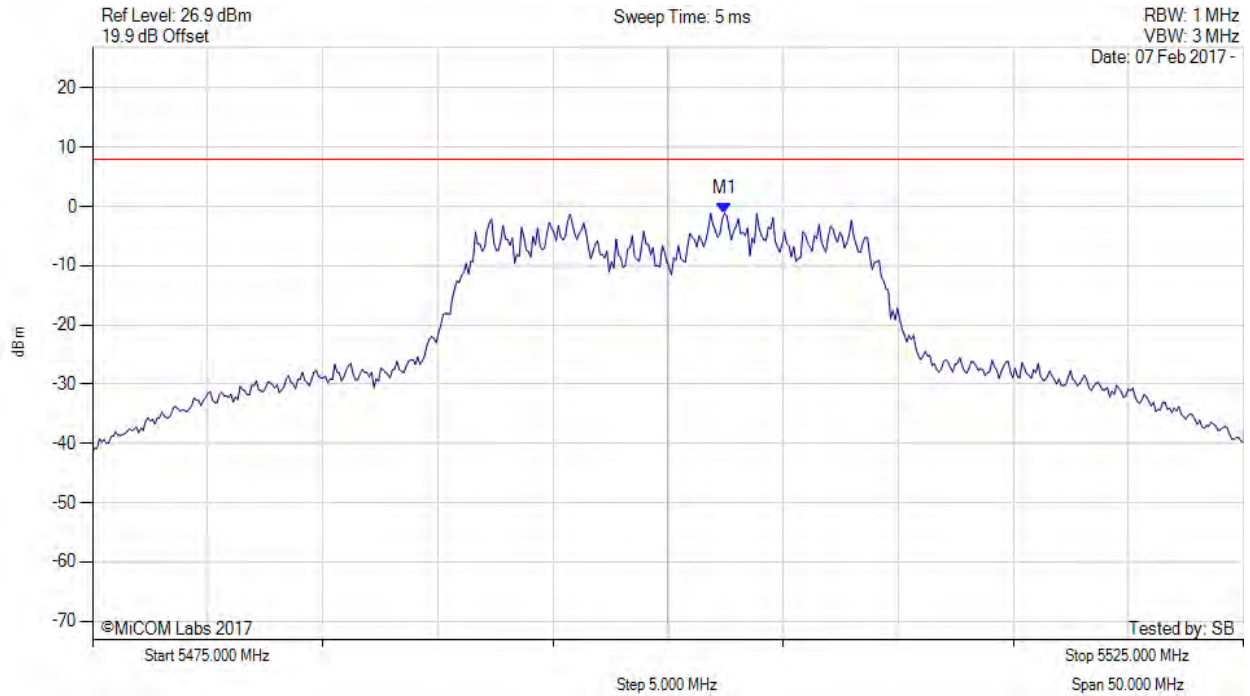

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5502.455 MHz : -1.135 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 158 of 189

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

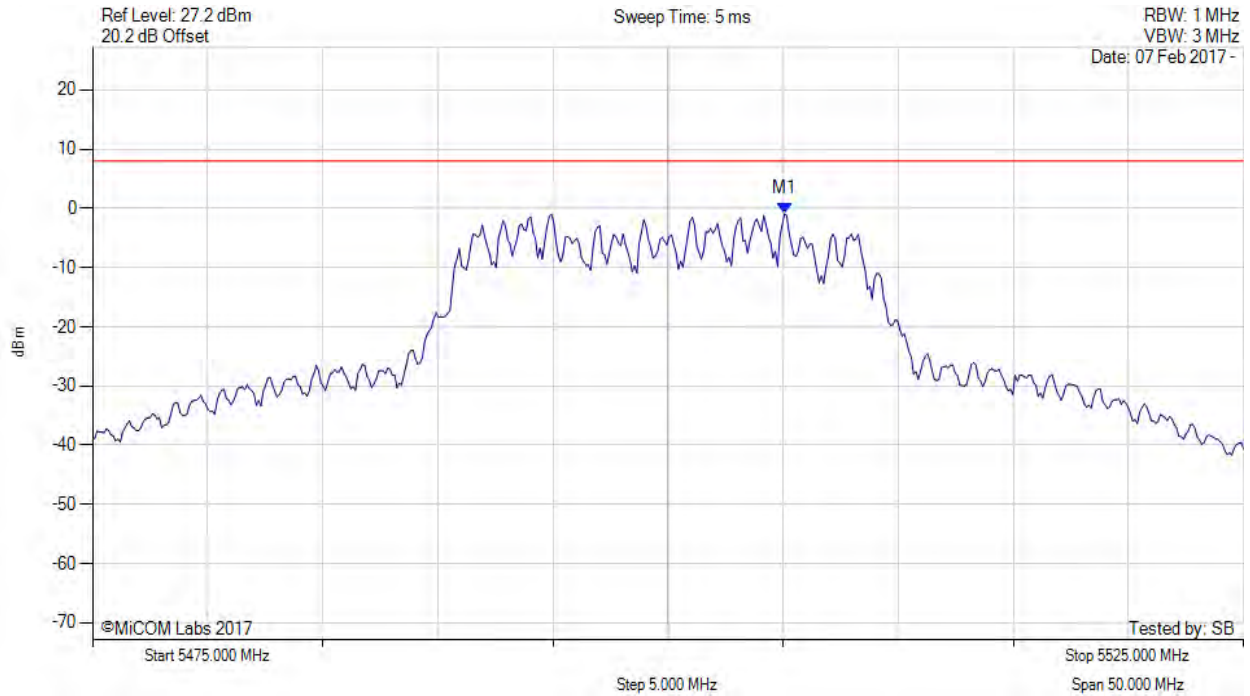

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5505.060 MHz : -0.924 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 159 of 189



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5500.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

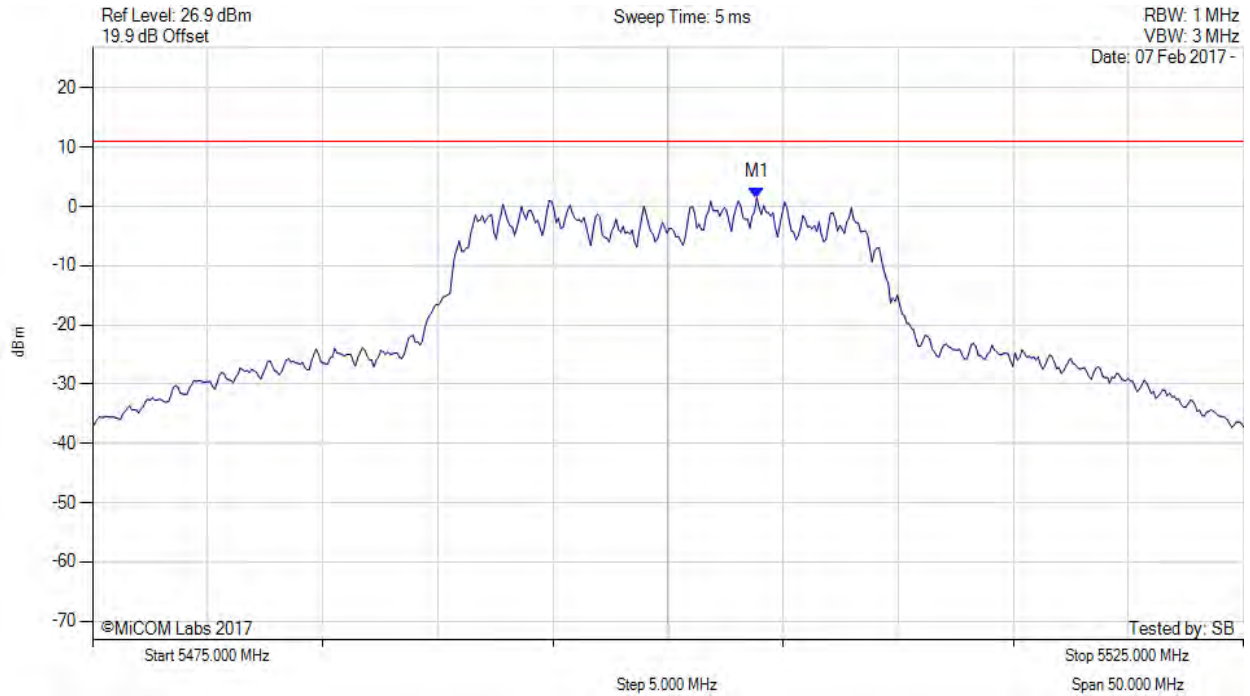

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5503.900 MHz : 1.501 dBm M1 + DCCF : 5503.900 MHz : 2.416 dBm Duty Cycle Correction Factor : +0.92 dB	Limit: ≤ 11.0 dBm Margin: -8.6 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 160 of 189

POWER SPECTRAL DENSITY



Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

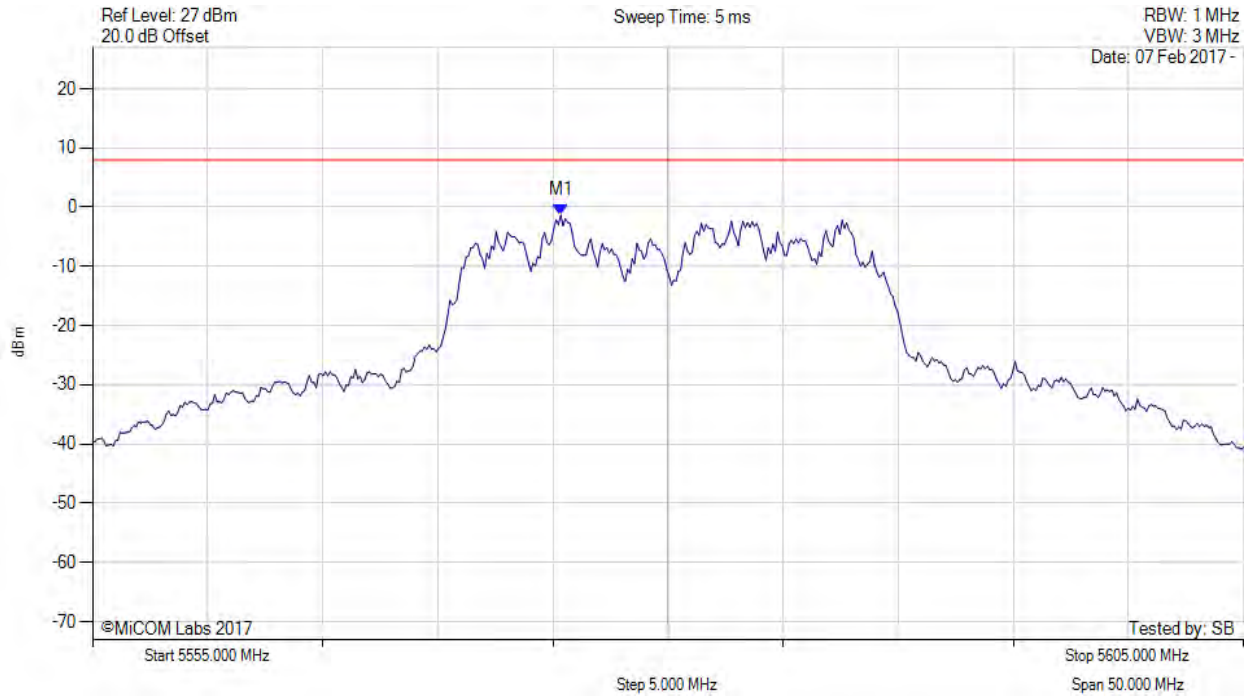

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5575.341 MHz : -1.362 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 161 of 189

POWER SPECTRAL DENSITY



Variation: 802.11n HT-20, Channel: 5580.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

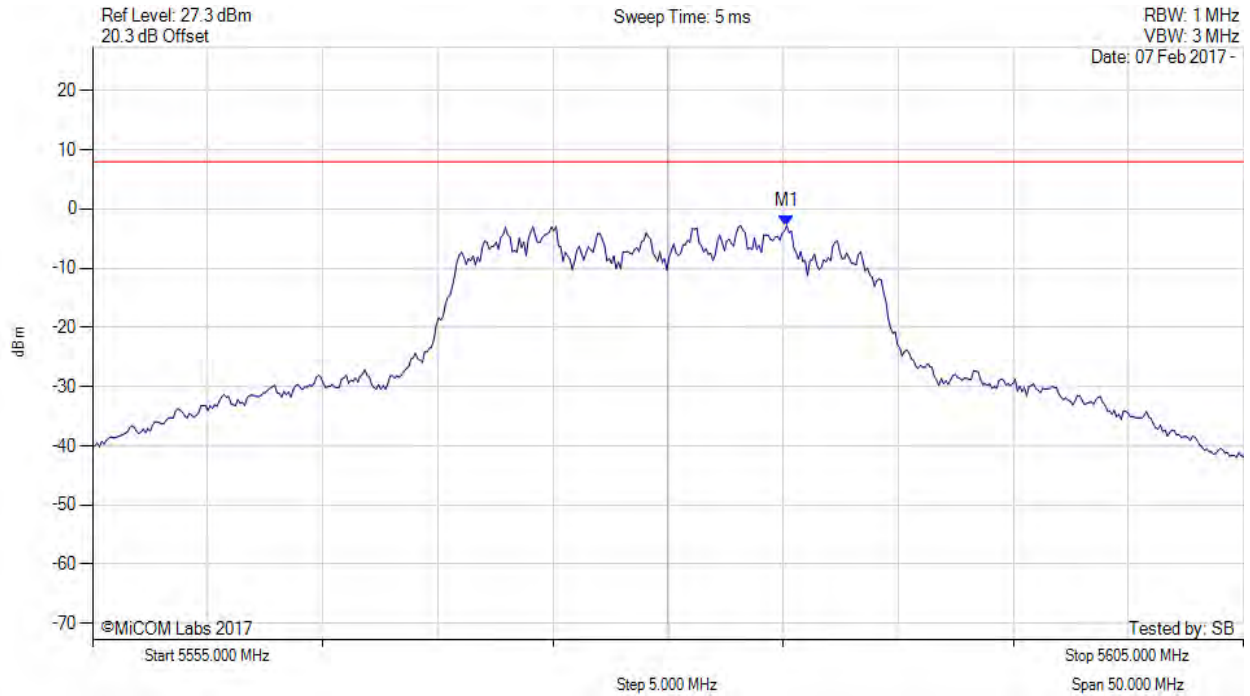

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5585.160 MHz : -2.806 dBm	Channel Frequency: 5580.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 162 of 189



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5580.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

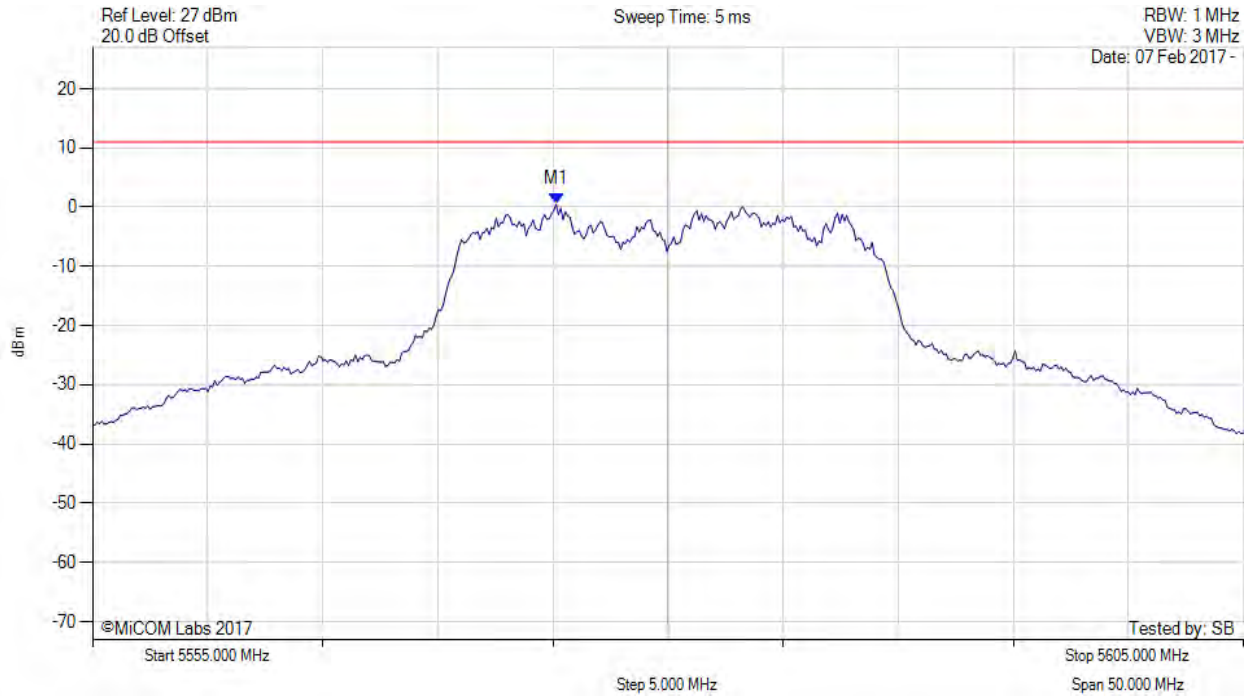

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5575.100 MHz : 0.481 dBm M1 + DCCF : 5575.100 MHz : 1.396 dBm Duty Cycle Correction Factor : +0.92 dB	Limit: ≤ 11.0 dBm Margin: -9.6 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 163 of 189



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5720.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

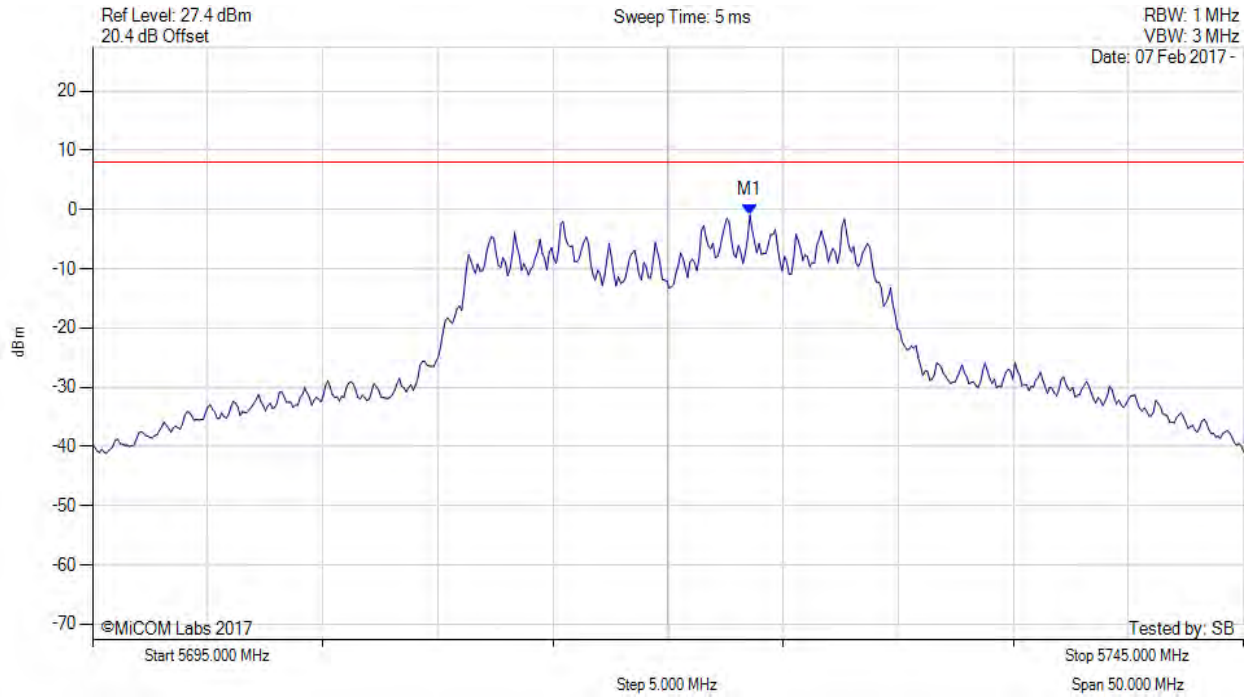

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5723.557 MHz : -0.937 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 164 of 189



POWER SPECTRAL DENSITY

Variation: 802.11n HT-20, Channel: 5720.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

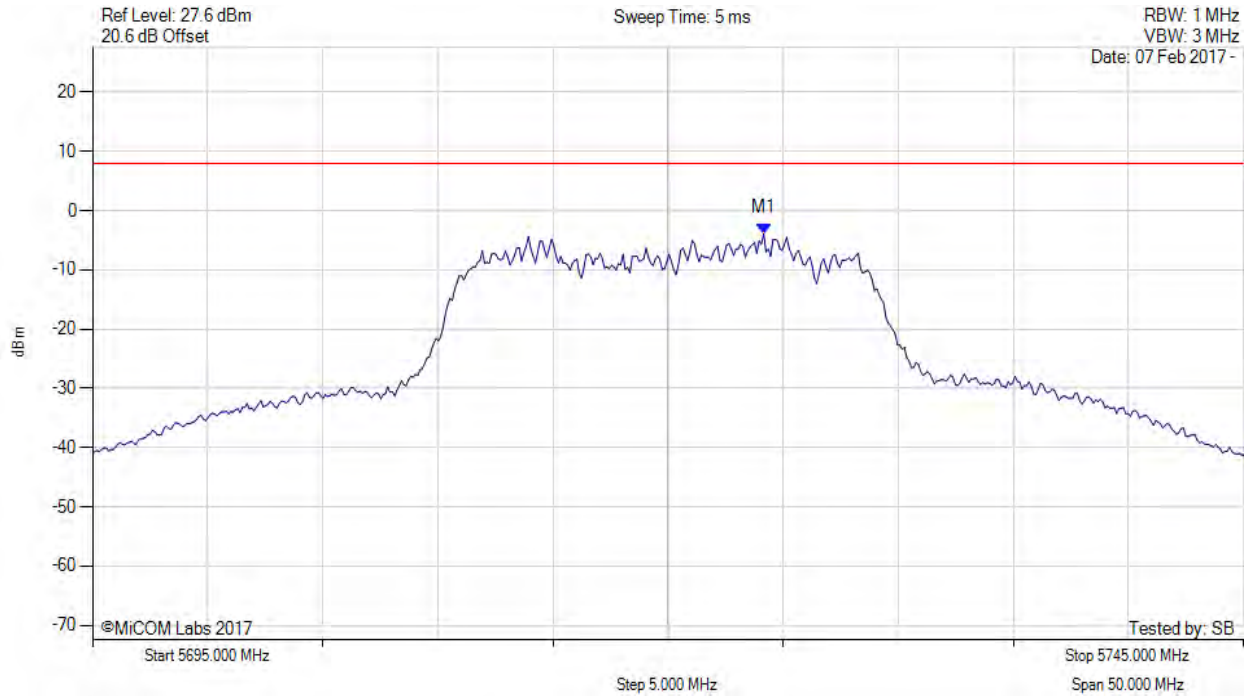

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5724.158 MHz : -3.856 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 165 of 189



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5720.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

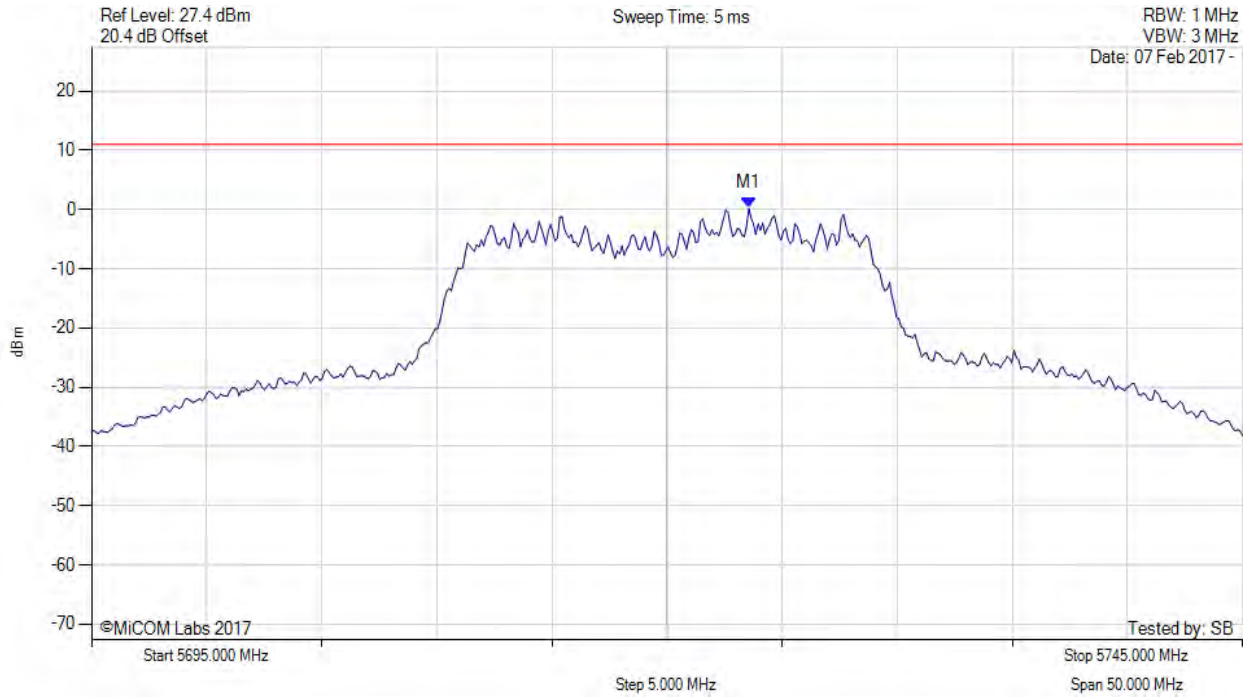

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5723.600 MHz : 0.204 dBm M1 + DCCF : 5723.600 MHz : 1.119 dBm Duty Cycle Correction Factor : +0.92 dB	Limit: ≤ 11.0 dBm Margin: -9.9 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 166 of 189

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

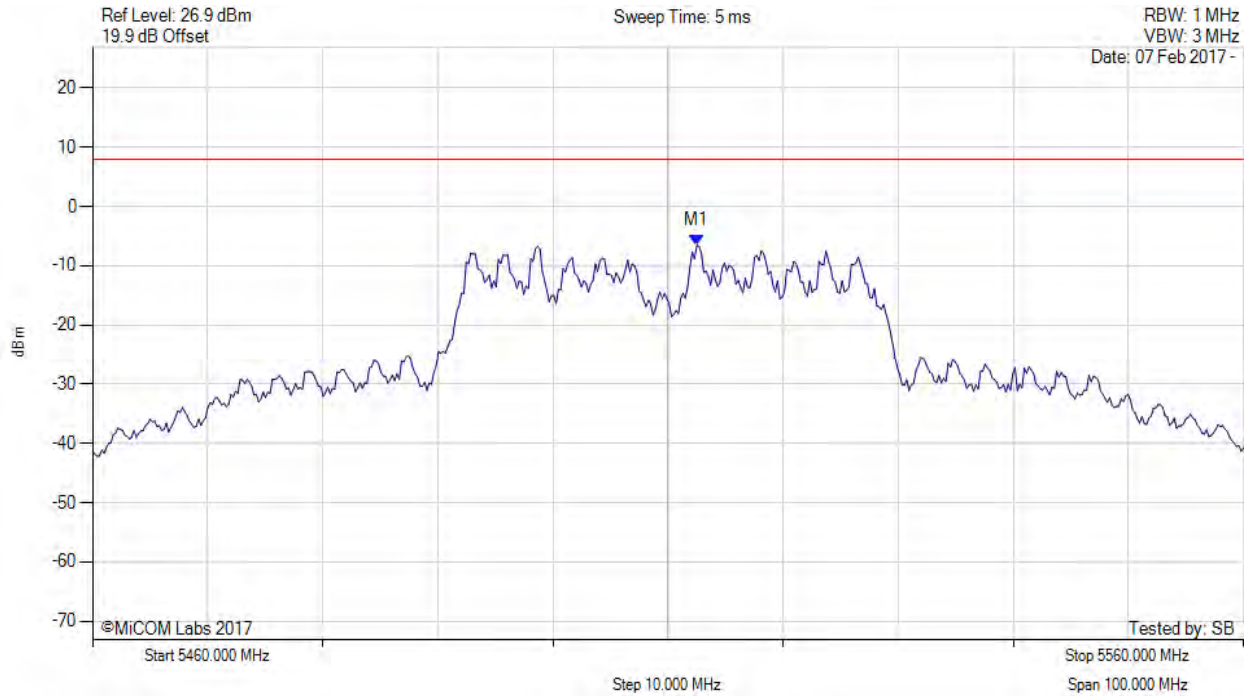

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5512.505 MHz : -6.553 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 167 of 189

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

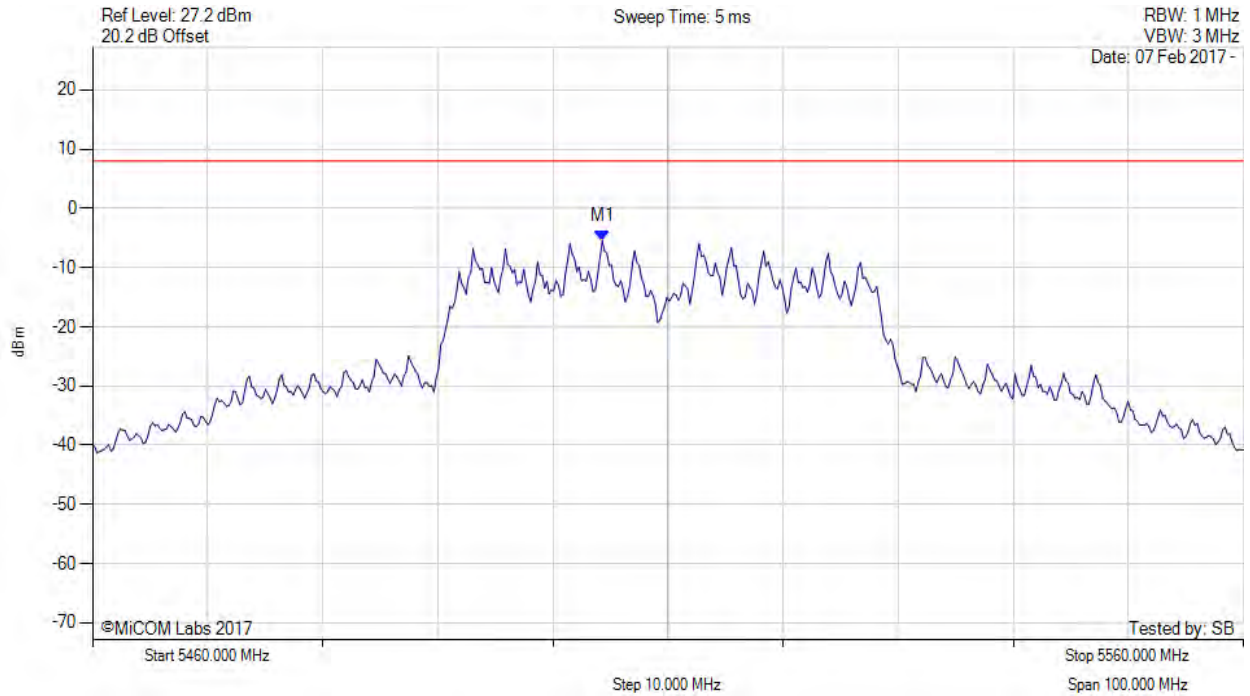

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5504.289 MHz : -5.521 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 168 of 189

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5510.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

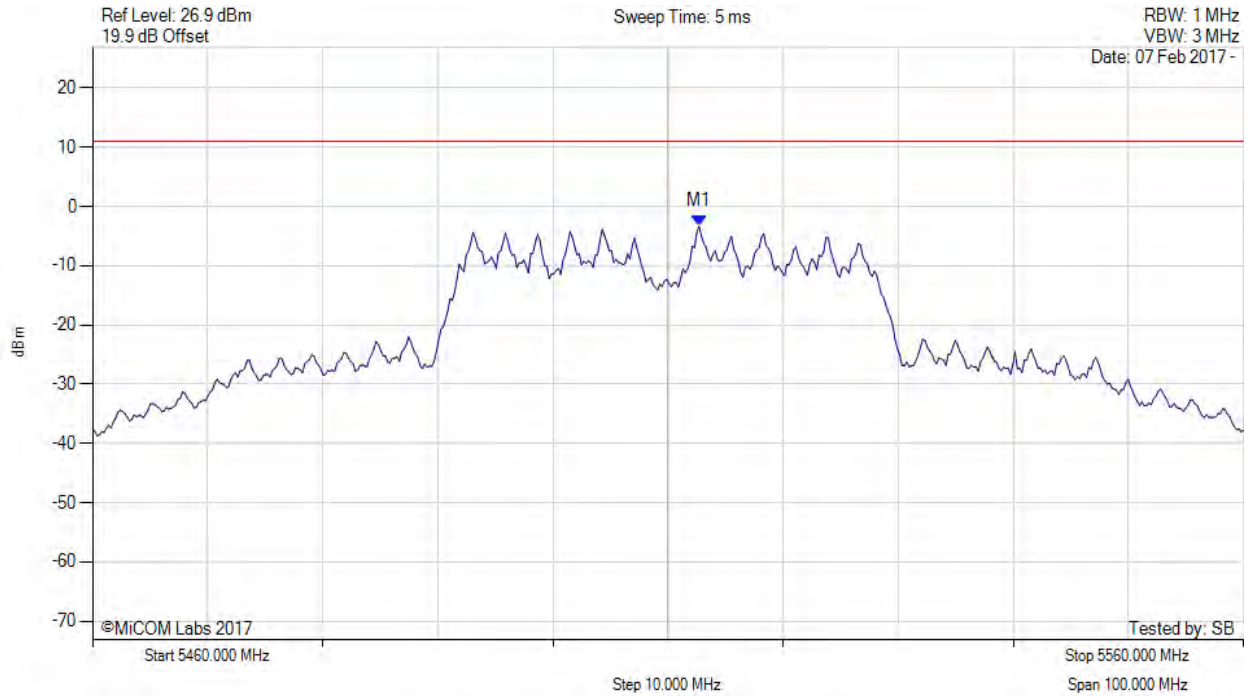

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5512.700 MHz : -3.352 dBm M1 + DCCF : 5512.700 MHz : -1.865 dBm Duty Cycle Correction Factor : +1.49 dB	Limit: ≤ 11.0 dBm Margin: -12.9 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 169 of 189

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

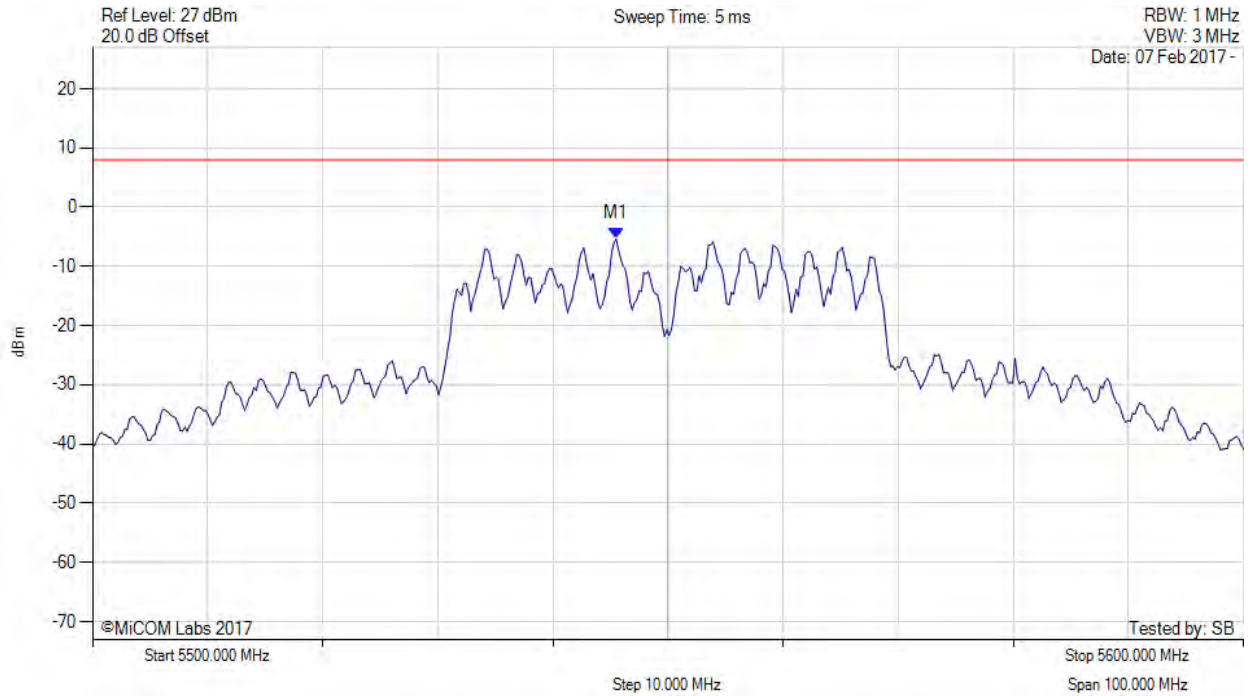

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5545.491 MHz : -5.381 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 170 of 189

POWER SPECTRAL DENSITY



Variation: 802.11n HT-40, Channel: 5550.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

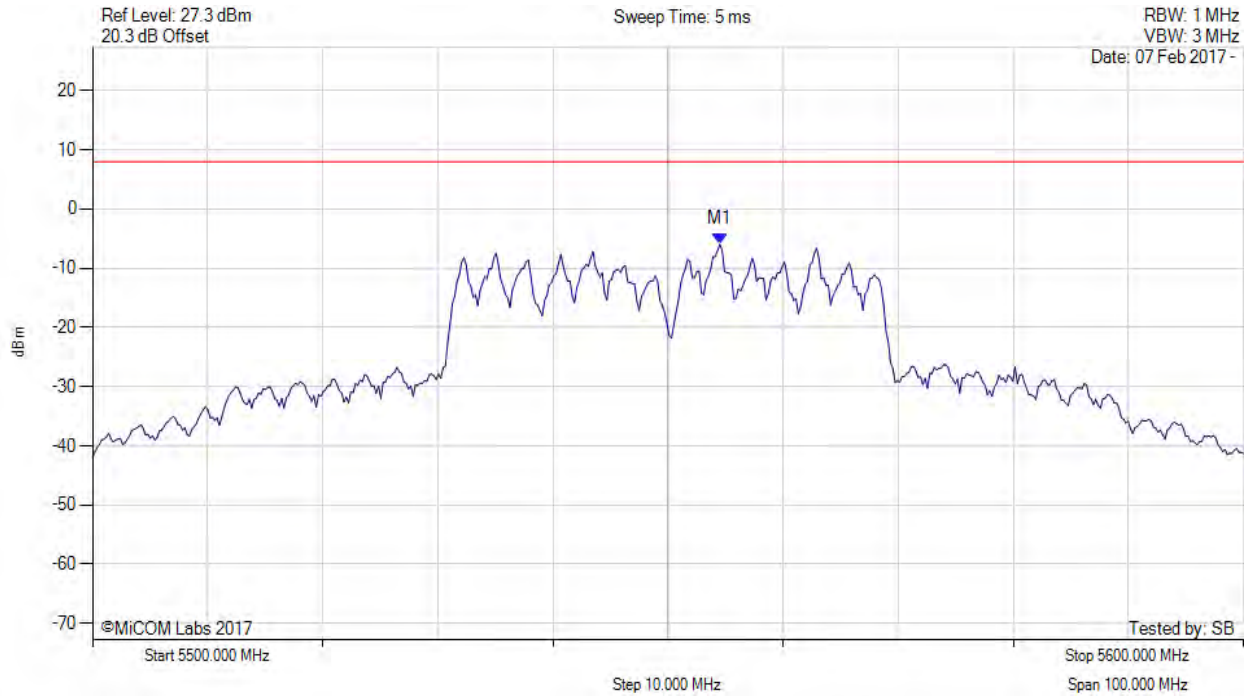

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5554.509 MHz : -5.965 dBm	Channel Frequency: 5550.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 171 of 189

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5550.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

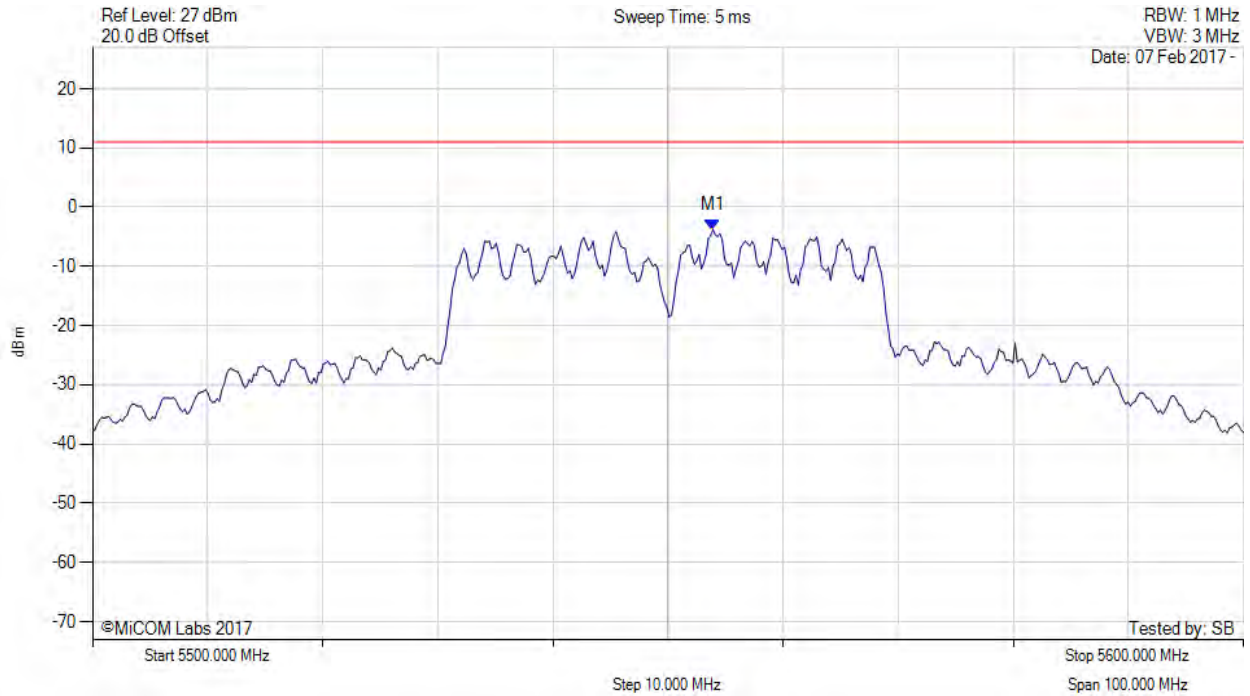

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5553.900 MHz : -3.833 dBm M1 + DCCF : 5553.900 MHz : -2.346 dBm Duty Cycle Correction Factor : +1.49 dB	Limit: ≤ 11.0 dBm Margin: -13.4 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 172 of 189

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5710.00 MHz, Chain a, Temp: 20, Voltage: 110 Vac

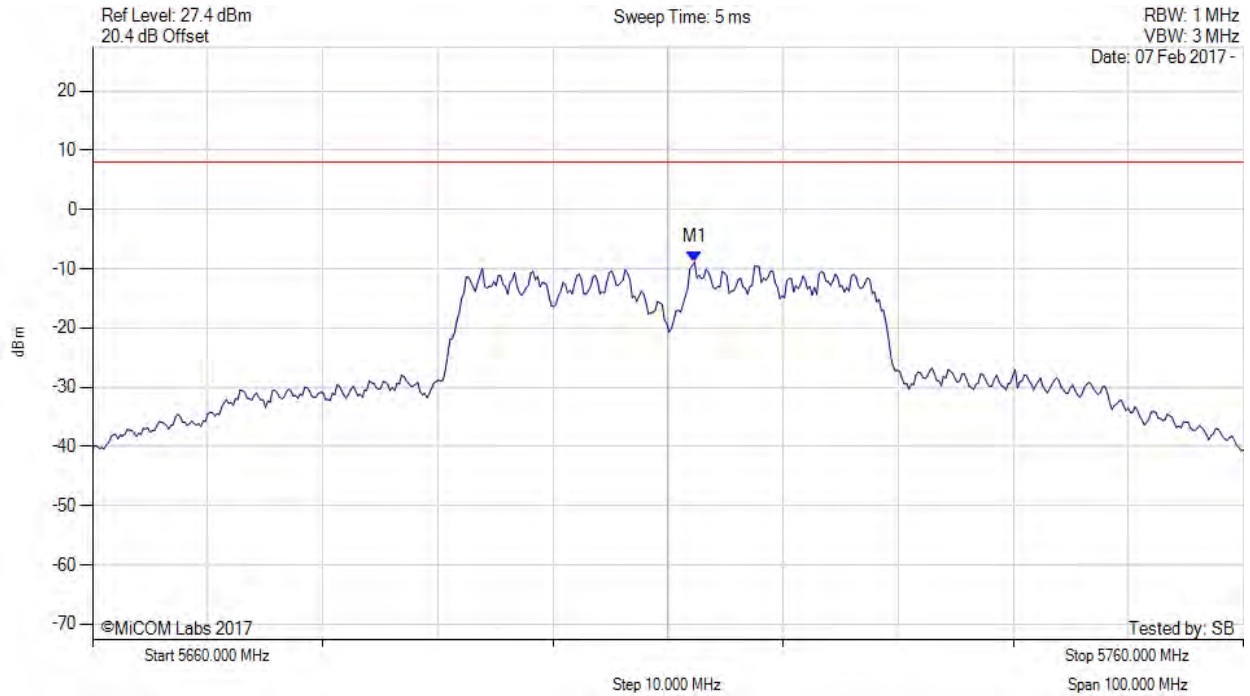

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5712.305 MHz : -8.868 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 173 of 189

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5710.00 MHz, Chain b, Temp: 20, Voltage: 110 Vac

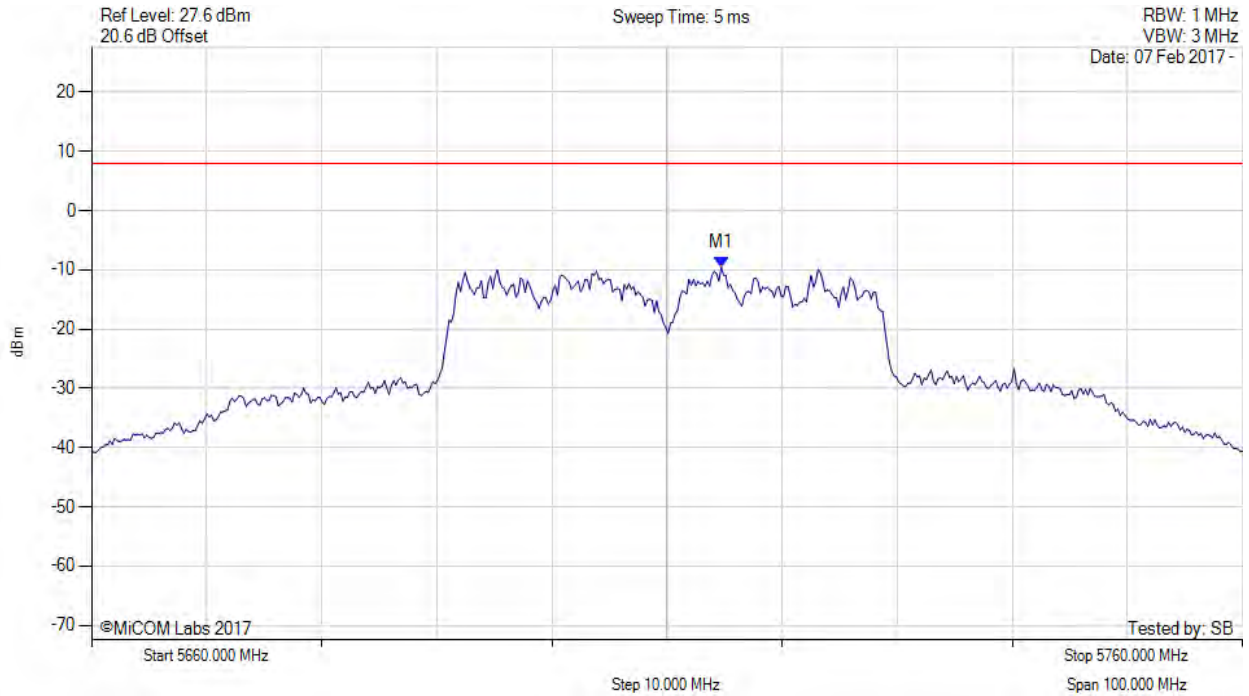

Analyzer Setup	Marker: Frequency: Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEWS	M1 : 5714.709 MHz : -9.524 dBm	Limit: ≤ 7.990 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 174 of 189

POWER SPECTRAL DENSITY



Variant: 802.11n HT-40, Channel: 5710.00 MHz, SUM, Temp: 20, Voltage: 110 Vac

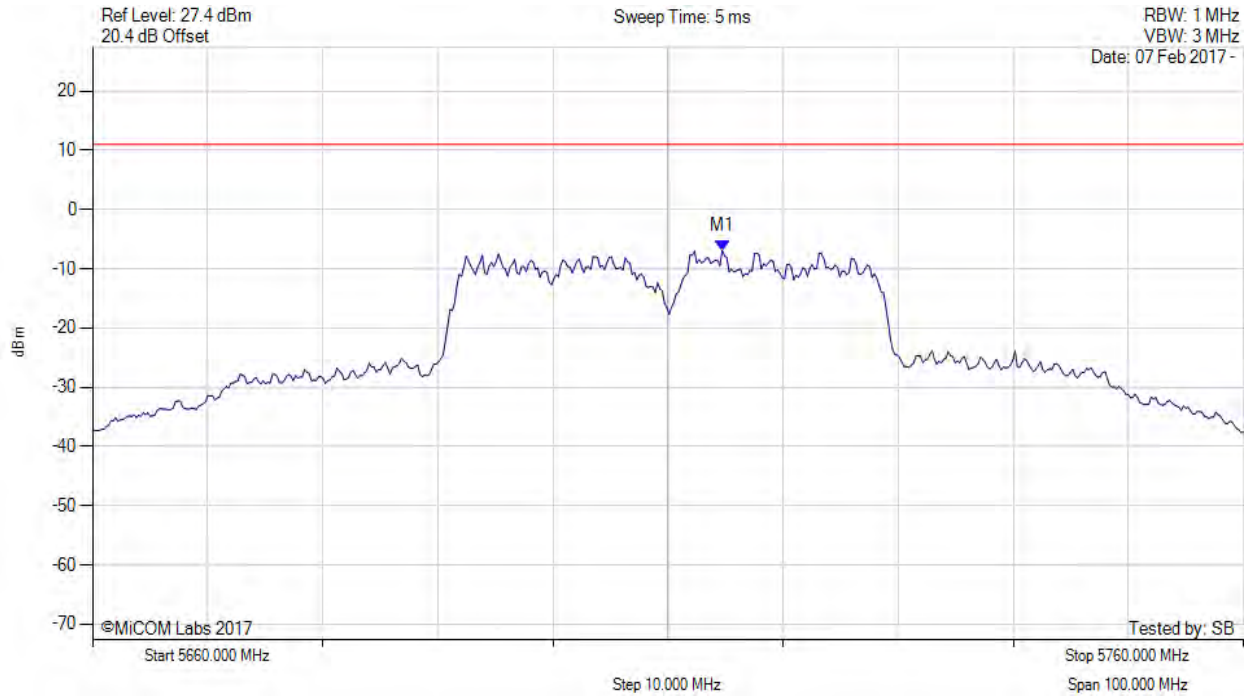

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5714.700 MHz : -6.942 dBm M1 + DCCF : 5714.700 MHz : -5.455 dBm Duty Cycle Correction Factor : +1.49 dB	Limit: ≤ 11.0 dBm Margin: -16.5 dB

[back to matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 175 of 189

A.3. Radiated

A.3.1. TX Spurious & Restricted Band Emissions

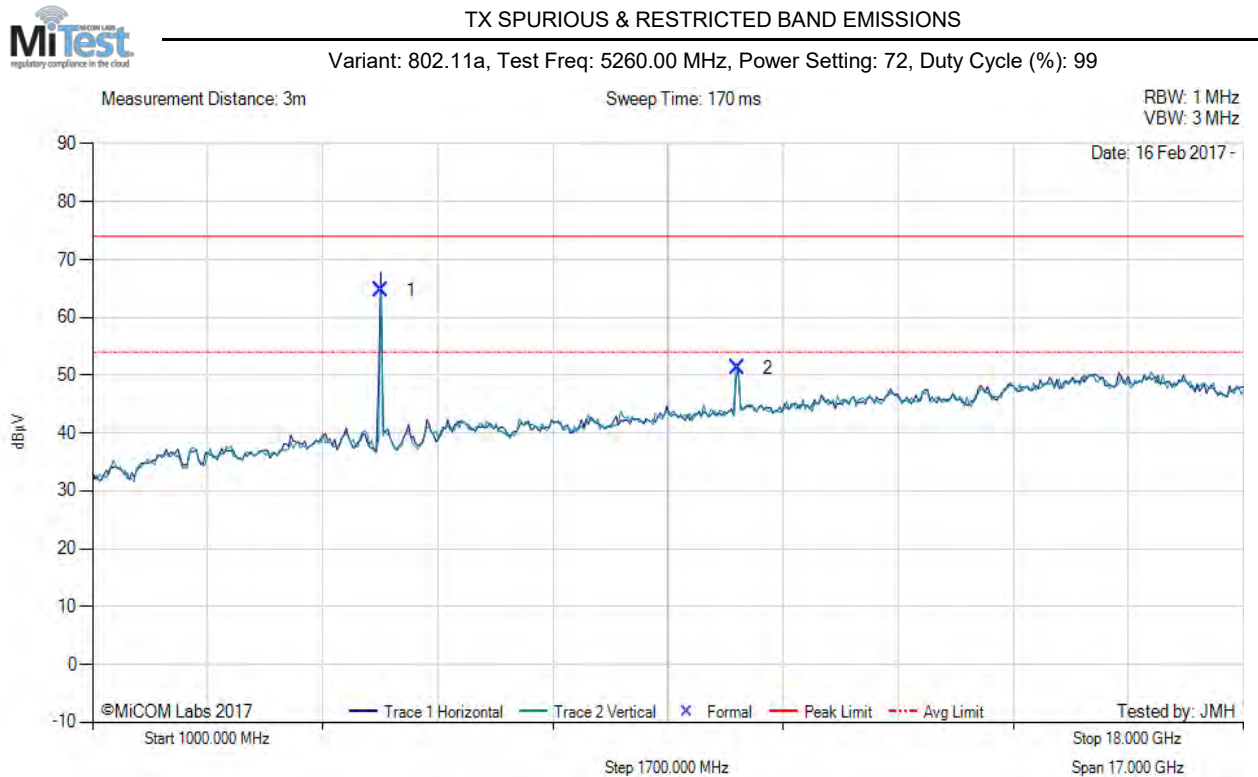

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5261.44	72.32	3.66	-11.29	64.69	Fundamental	Horizontal	100	0	--	--	
2	10519.94	50.02	5.43	-4.21	51.24	Peak (NRB)	Vertical	151	7	--	--	Pass

Test Notes: APINP203 SN# CNCPK2T00L on 150cm table powered by AC.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 176 of 189



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5300.00 MHz, Power Setting: 72, Duty Cycle (%): 99

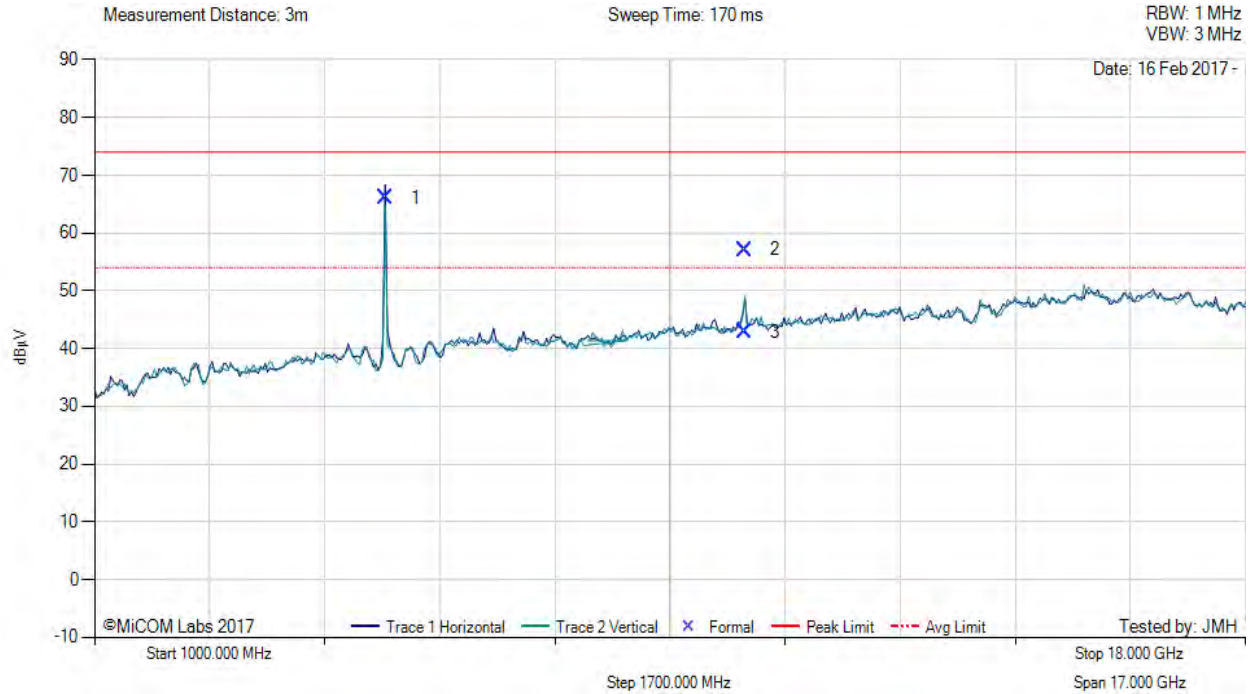

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5295.84	73.38	3.79	-11.11	66.06	Fundamental	Horizontal	100	0	--	--	
2	10604.94	55.48	5.56	-3.92	57.12	Max Peak	Horizontal	185	193	74.0	-16.9	Pass
3	10604.94	41.15	5.56	-3.92	42.79	Max Avg	Horizontal	185	193	54.0	-11.2	Pass

Test Notes: APINP203 SN# CNCPK2T00L on 150cm table powered by AC.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 177 of 189



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5320.00 MHz, Power Setting: 72, Duty Cycle (%): 99

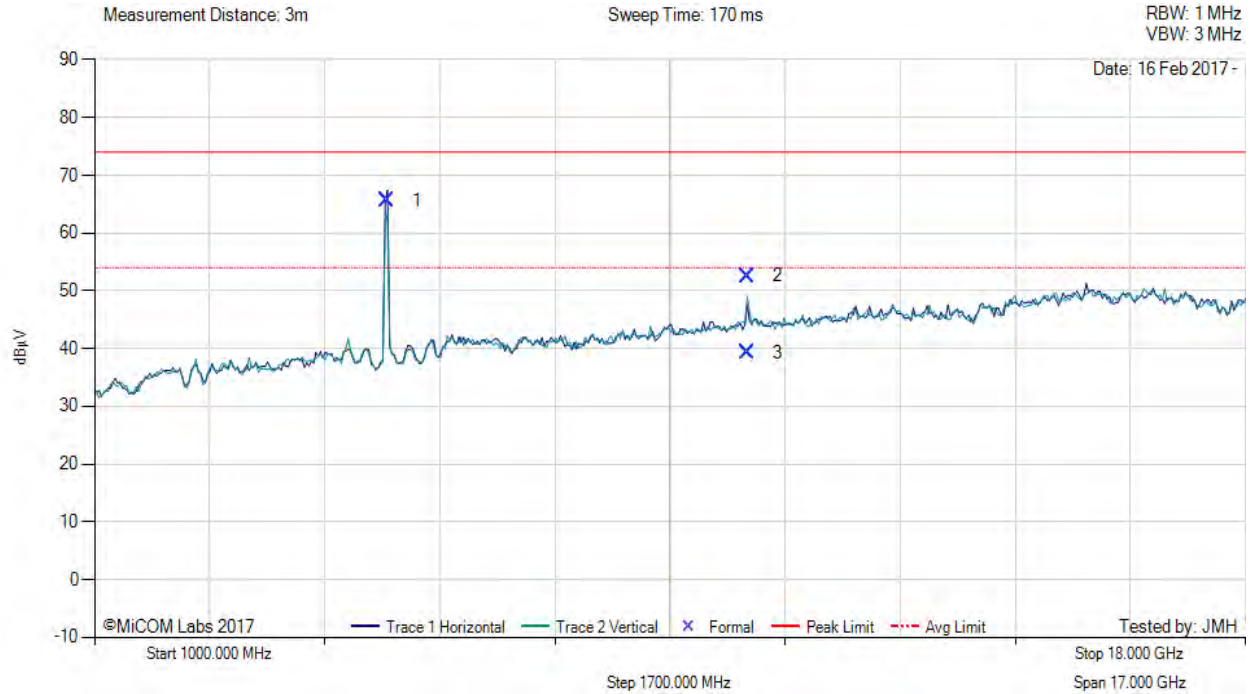

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5323.73	72.98	3.74	-11.06	65.66	Fundamental	Horizontal	100	0	--	--	
2	10640.33	51.07	5.39	-3.89	52.57	Max Peak	Vertical	98	18	74.0	-21.4	Pass
3	10640.33	37.71	5.39	-3.89	39.21	Max Avg	Vertical	98	18	54.0	-14.8	Pass

Test Notes: APINP203 SN# CNCPK2T00L on 150cm table powered by AC.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 178 of 189



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5500.00 MHz, Power Setting: 72, Duty Cycle (%): 99

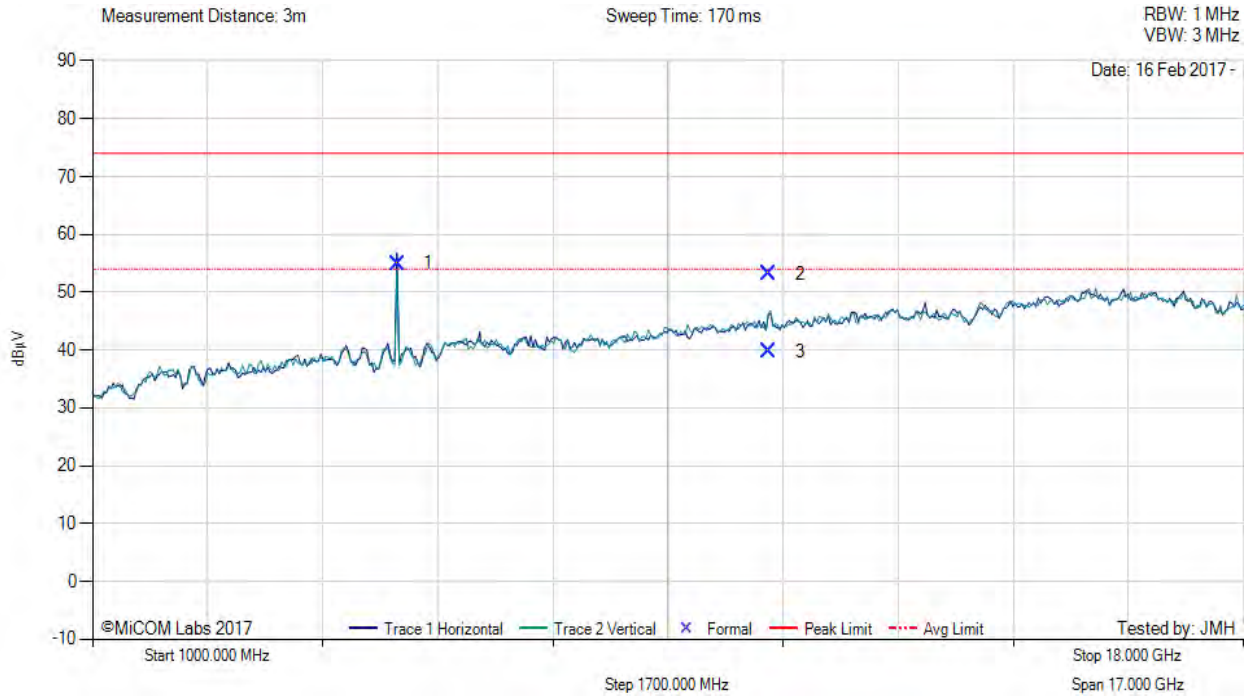

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5504.21	62.41	3.75	-11.18	54.98	Fundamental	Horizontal	100	0	--	--	
2	10995.83	51.77	5.60	-4.26	53.11	Max Peak	Vertical	155	267	74.0	-20.9	Pass
3	10995.83	38.37	5.60	-4.26	39.71	Max Avg	Vertical	155	267	54.0	-14.3	Pass

Test Notes: APINP203 SN# CNCPK2T00L on 150cm table powered by AC.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 179 of 189



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5580.00 MHz, Power Setting: 72, Duty Cycle (%): 99

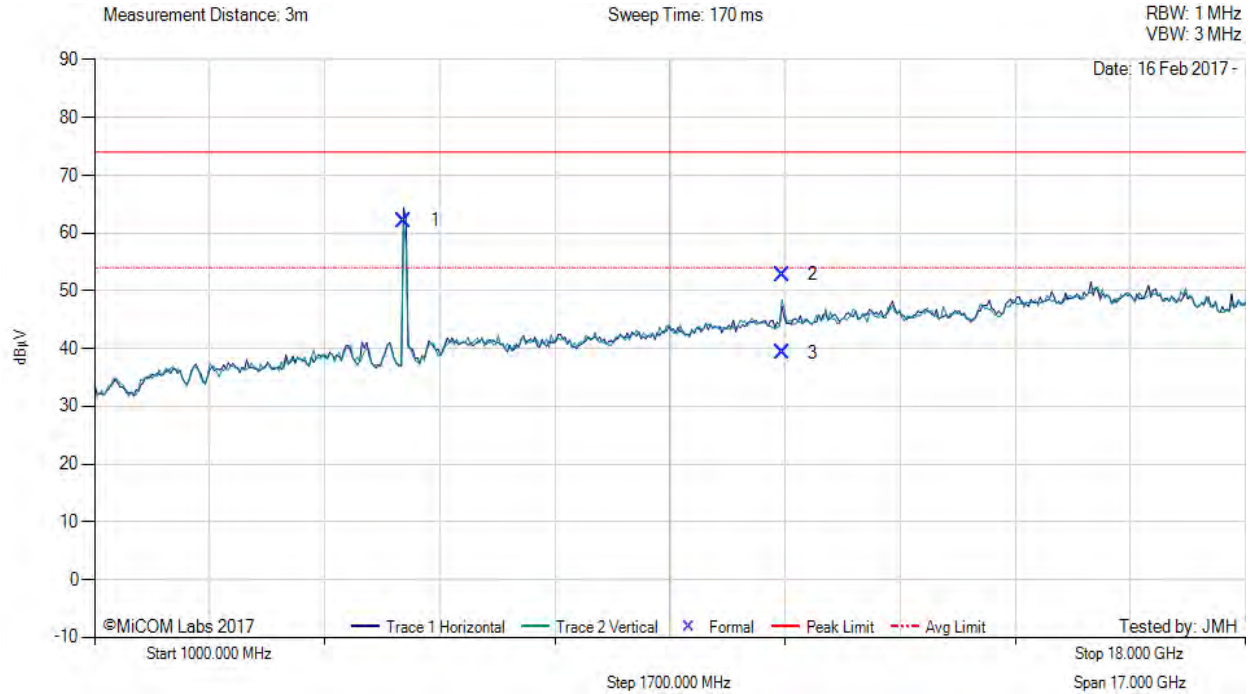

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5576.21	69.56	3.81	-11.21	62.16	Fundamental	Horizontal	100	0	--	--	
2	11157.98	50.94	5.94	-4.06	52.82	Max Peak	Vertical	140	357	74.0	-21.2	Pass
3	11157.98	37.39	5.94	-4.06	39.27	Max Avg	Vertical	140	357	54.0	-14.7	Pass

Test Notes: APINP203 SN# CNCPK2T00L on 150cm table powered by AC.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 180 of 189



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5720.00 MHz, Power Setting: 72, Duty Cycle (%): 99

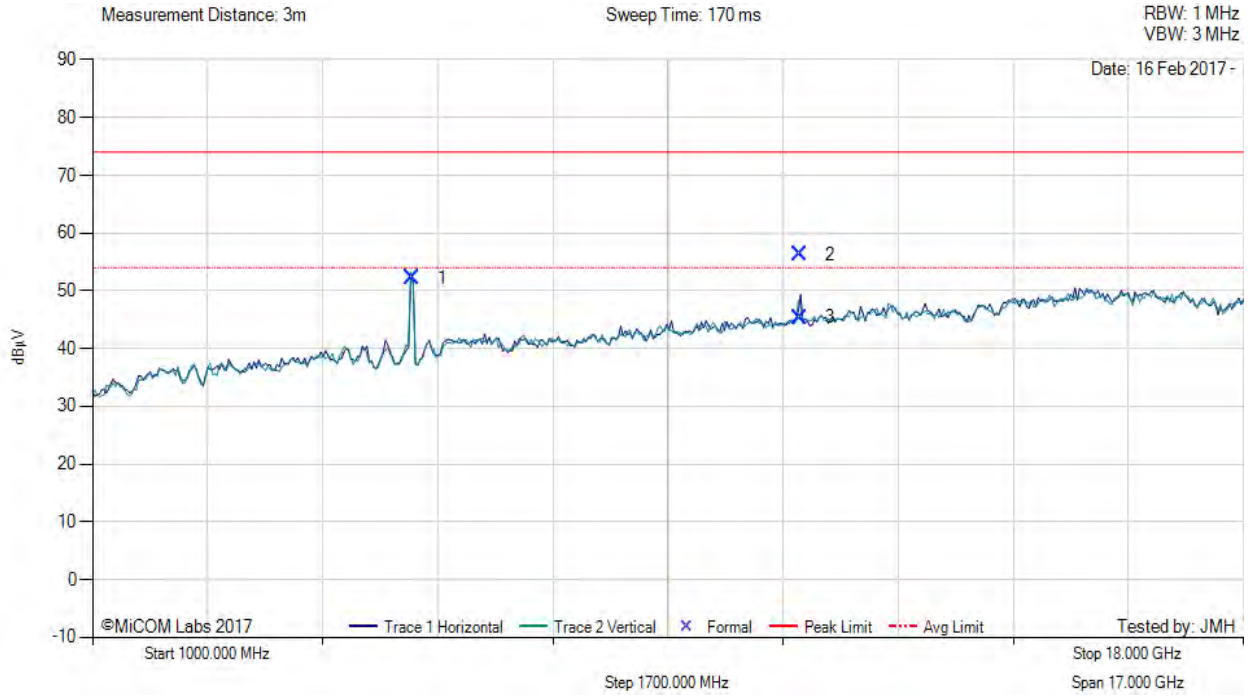

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5715.24	59.08	3.81	-10.76	52.13	Fundamental	Vertical	100	0	--	--	
2	11439.80	55.80	5.35	-4.93	56.22	Max Peak	Horizontal	187	304	74.0	-17.8	Pass
3	11439.80	44.98	5.35	-4.93	45.40	Max Avg	Horizontal	187	304	54.0	-8.6	Pass

Test Notes: APINP203 SN# CNCPK2T00L on 150cm table powered by AC.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 181 of 189

A.3.2. Restricted Edge & Band-Edge Emissions



RESTRICTED UPPER BAND-EDGE EMISSIONS

Variant: 802.11a, Test Freq: 5320.00 MHz, Power Setting: 62, Duty Cycle (%): 99

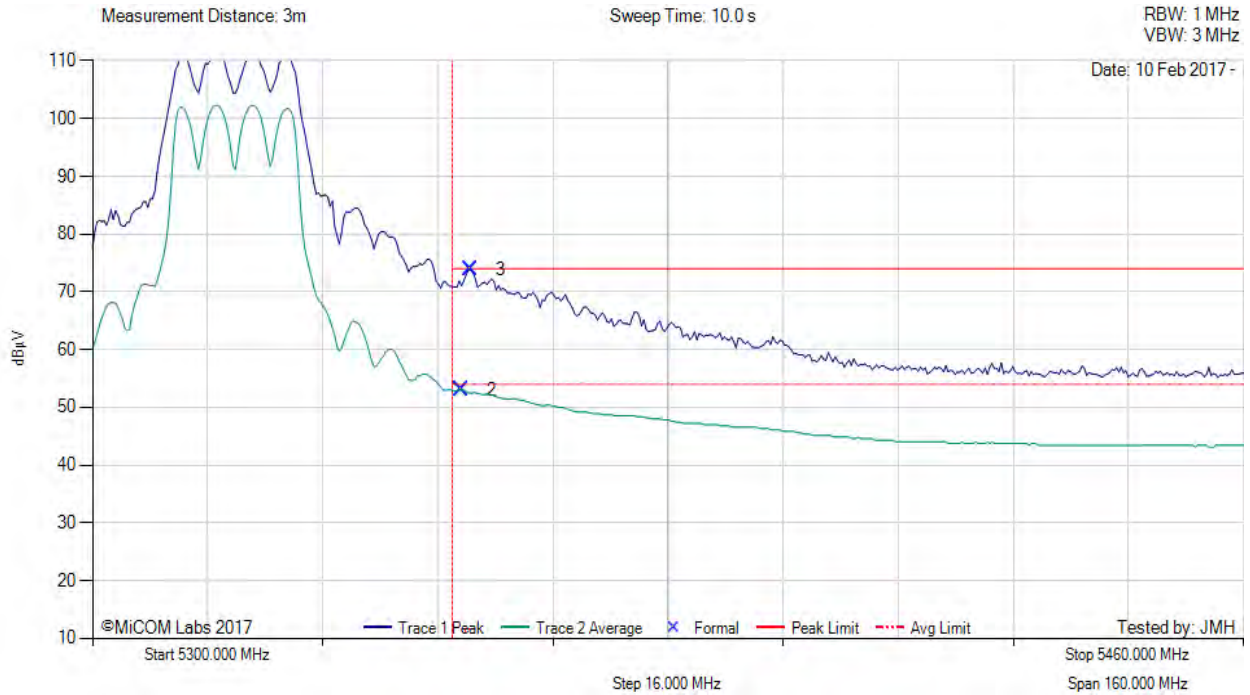

5300.00 - 5460.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
2	5351.28	14.86	3.71	34.51	53.08	Max Avg	Horizontal	169	353	54.0	-0.9	Pass
3	5352.57	35.68	3.71	34.50	73.89	Max Peak	Horizontal	169	353	74.0	-0.1	Pass
1	5350.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: EUT APINP203 SN# CNCPK2T00L on 150cm table powered by AC. Power reduced to 62 to meet band edge limits.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 182 of 189



RESTRICTED UPPER BAND-EDGE EMISSIONS

Variat: 802.11ac-80, Test Freq: 5290.00 MHz, Power Setting: 53, Duty Cycle (%): 99

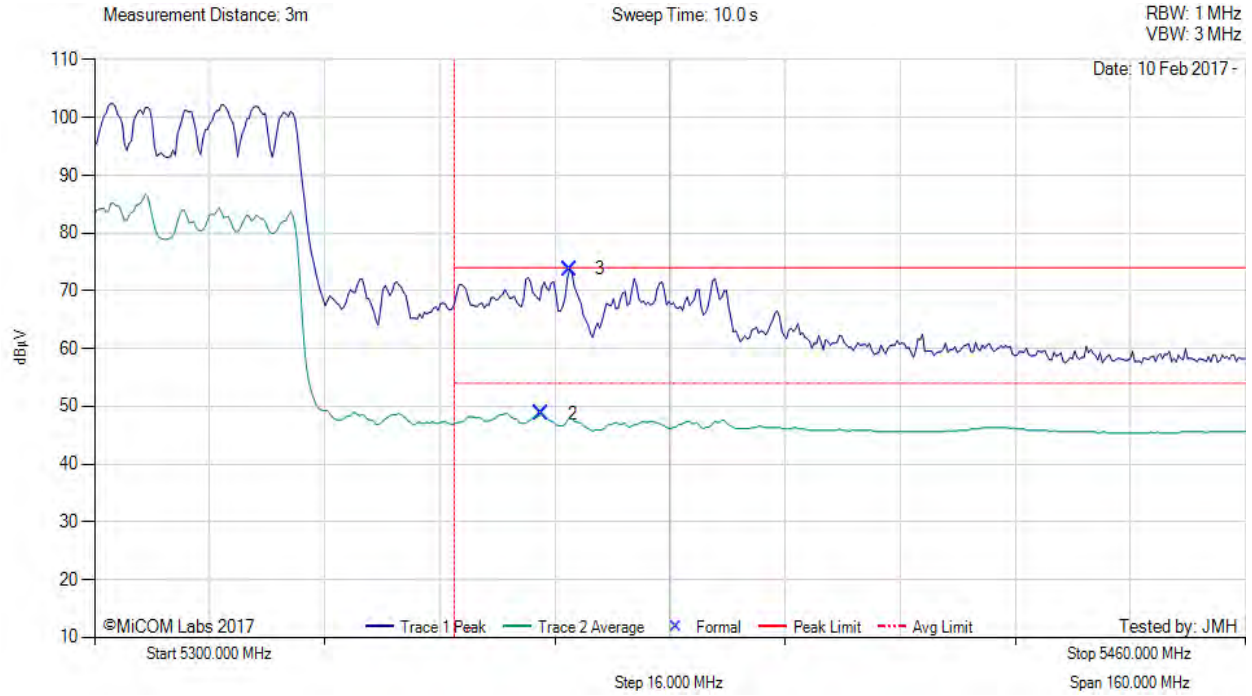

5300.00 - 5460.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
2	5362.18	10.56	3.70	34.48	48.74	Max Avg	Horizontal	169	353	54.0	-5.3	Pass
3	5366.03	35.58	3.69	34.47	73.74	Max Peak	Horizontal	169	353	74.0	-0.3	Pass
1	5350.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: EUT APINP203 SN# CNCPK2T00L on 150cm table powered by AC. Power reduced to 53 to meet band edge limit.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 183 of 189



RESTRICTED UPPER BAND-EDGE EMISSIONS

Variant: 802.11n HT-20, Test Freq: 5320.00 MHz, Power Setting: 72, Duty Cycle (%): 99

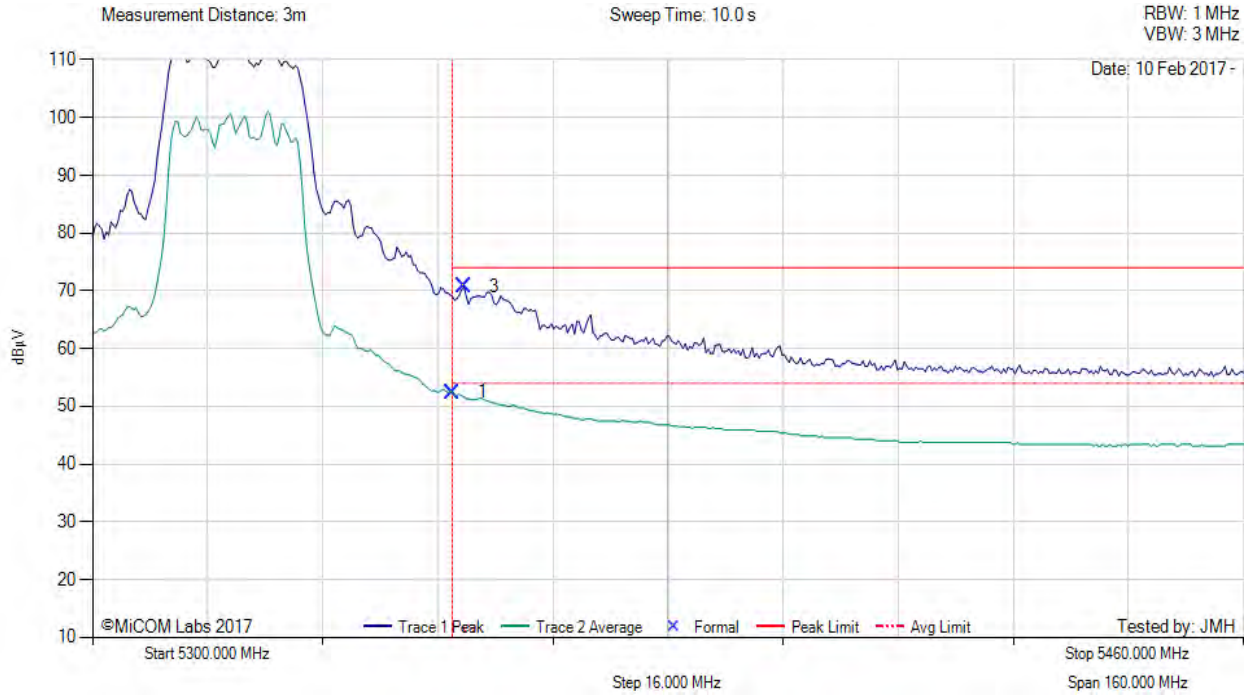

5300.00 - 5460.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5350.00	14.23	3.70	34.51	52.44	Max Avg	Horizontal	169	353	54.0	-1.6	Pass
3	5351.60	32.50	3.71	34.51	70.72	Max Peak	Horizontal	169	353	74.0	-3.3	Pass
2	5350.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: EUT APINP203 SN# CNCPK2T00L on 150cm table powered by AC.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 184 of 189



RESTRICTED UPPER BAND-EDGE EMISSIONS

Variant: 802.11n HT-40, Test Freq: 5310.00 MHz, Power Setting: 56, Duty Cycle (%): 99

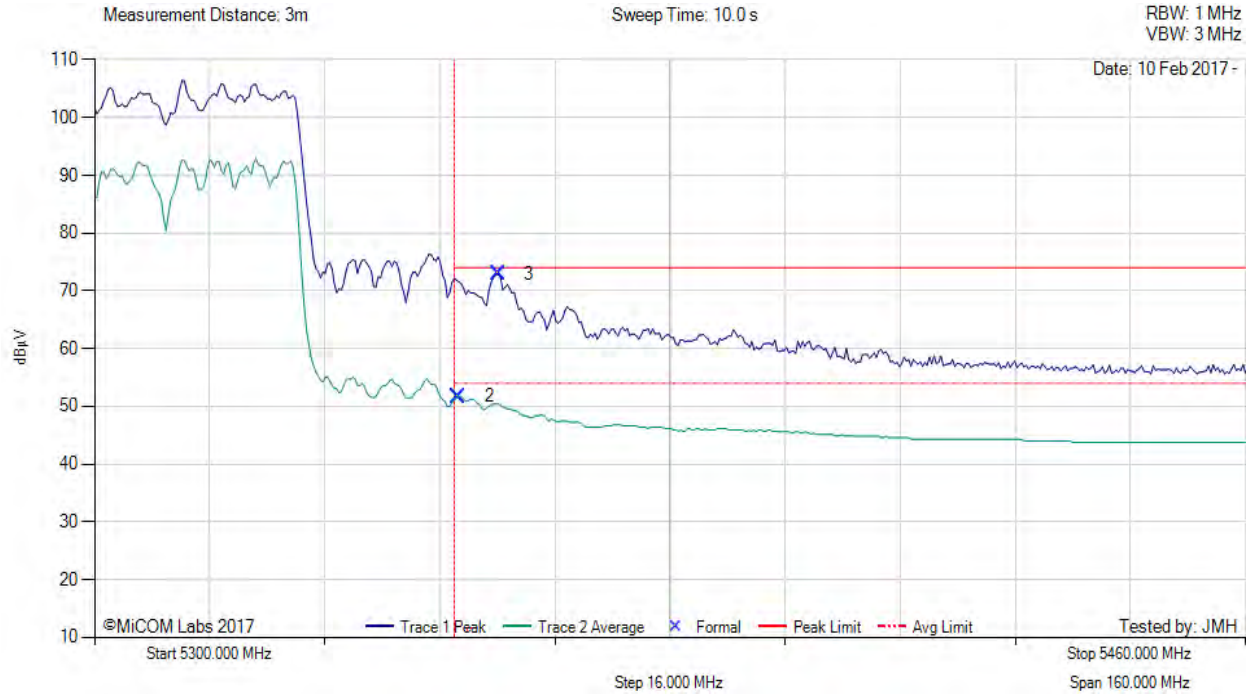

5300.00 - 5460.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
2	5350.64	13.52	3.71	34.51	51.74	Max Avg	Horizontal	169	353	54.0	-2.3	Pass
3	5356.09	34.73	3.71	34.50	72.94	Max Peak	Horizontal	169	353	74.0	-1.1	Pass
1	5350.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--

Test Notes: EUT APINP203 SN# CNCPK2T00L on 150cm table powered by AC. Power reduced to 56 to meet band edge limit.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 185 of 189



RESTRICTED LOWER BAND-EDGE EMISSIONS

Variant: 802.11a, Test Freq: 5500.00 MHz, Power Setting: 62, Duty Cycle (%): 99

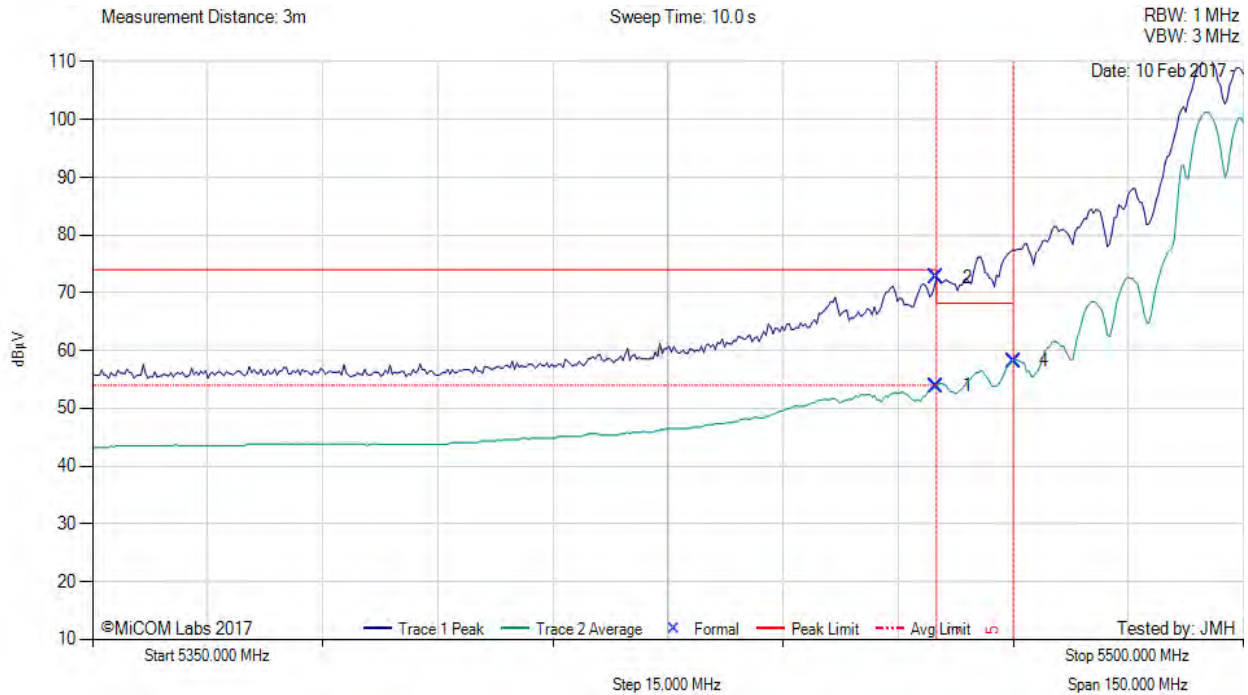

5350.00 - 5500.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5460.00	15.78	3.79	34.31	53.88	Max Avg	Horizontal	163	354	54.0	-0.1	Pass
2	5460.00	34.53	3.79	34.31	72.63	Max Peak	Horizontal	163	354	74.0	-1.4	Pass
4	5470.00	20.07	3.76	34.32	58.15	Max Avg	Horizontal	163	354	68.2	-10.1	Pass
3	5460.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--
5	5470.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT APINP203 SN# CNCPK2T00L on 150cm table powered by AC. Power reduced to 62 to meet band edge limit.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 186 of 189



RESTRICTED LOWER BAND-EDGE EMISSIONS

Variant: 802.11ac-80, Test Freq: 5530.00 MHz, Power Setting: 63, Duty Cycle (%): 99

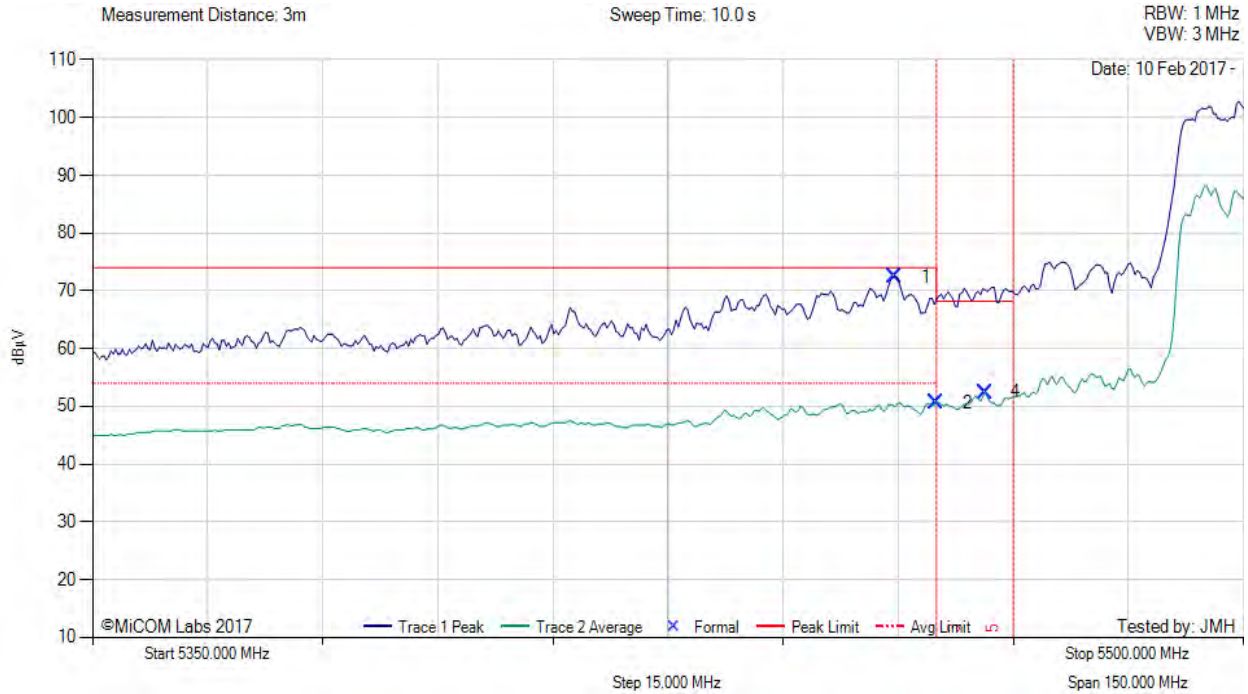

5350.00 - 5500.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5454.59	34.42	3.79	34.30	72.51	Max Peak	Horizontal	163	354	74.0	-1.5	Pass
2	5460.00	12.53	3.79	34.31	50.63	Max Avg	Horizontal	163	354	54.0	-3.4	Pass
4	5466.39	14.38	3.77	34.31	52.46	Max Avg	Horizontal	163	354	68.2	-15.7	Pass
3	5460.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--
5	5470.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT APINP203 SN# CNCPK2T00L on 150cm table powered by AC. Power reduced to 63 to meet band edge limit.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 187 of 189



RESTRICTED LOWER BAND-EDGE EMISSIONS

Variant: 802.11n HT-20, Test Freq: 5500.00 MHz, Power Setting: 72, Duty Cycle (%): 99

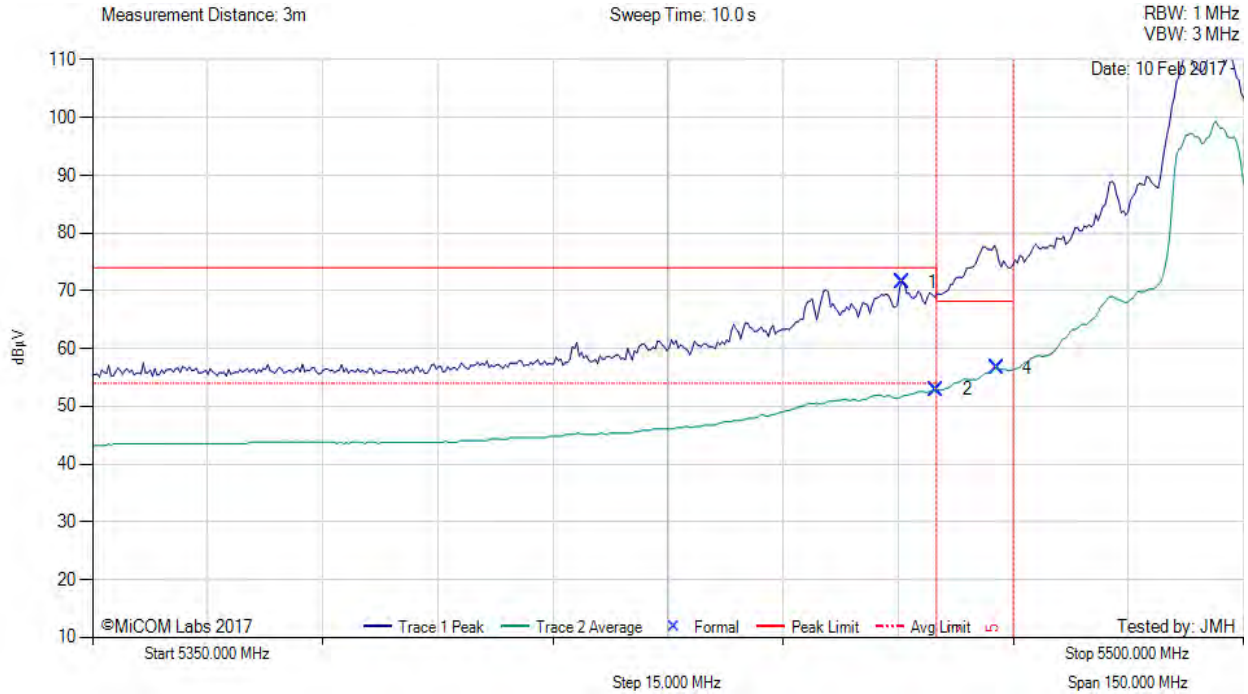

5350.00 - 5500.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5455.49	33.46	3.79	34.30	71.55	Max Peak	Horizontal	163	354	74.0	-2.5	Pass
2	5460.00	14.79	3.79	34.31	52.89	Max Avg	Horizontal	163	354	54.0	-1.1	Pass
4	5467.90	18.51	3.76	34.32	56.59	Max Avg	Horizontal	163	354	68.2	-11.6	Pass
3	5460.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--
5	5470.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT APINP203 SN# CNCPK2T00L on 150cm table powered by AC.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.




Title: Hewlett Packard Enterprise APINR203 & APINP203
To: FCC CFR 47 Part 15 Subpart E 15.407
Serial #: HPEN96-U12 Rev A (2x2) (Conducted & Radiated Data)
Issue Date: 13th June 2017
Page: 188 of 189



RESTRICTED LOWER BAND-EDGE EMISSIONS

Variant: 802.11n HT-40, Test Freq: 5510.00 MHz, Power Setting: 62, Duty Cycle (%): 99

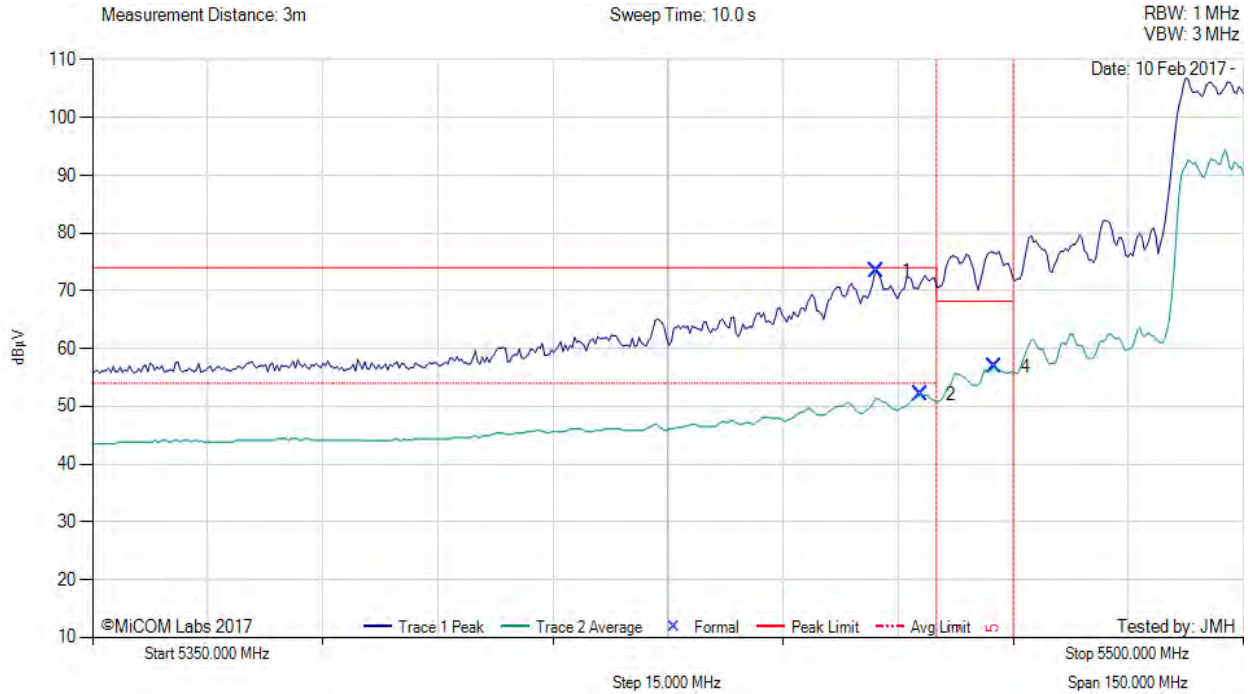

5350.00 - 5500.00 MHz												
Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	5452.18	35.27	3.78	34.30	73.35	Max Peak	Horizontal	163	354	74.0	-0.7	Pass
2	5457.90	13.91	3.80	34.30	52.01	Max Avg	Horizontal	163	354	54.0	-2.0	Pass
4	5467.60	18.78	3.76	34.32	56.86	Max Avg	Horizontal	163	354	68.2	-11.3	Pass
3	5460.00	--	--	--	--	Restricted-Band	--	--	--	--	--	--
5	5470.00	--	--	--	--	Band-Edge	--	--	--	--	--	--

Test Notes: EUT APINP203 SN# CNCPK2T00L on 150cm table powered by AC. Power reduced to 62 to meet band edge limit.

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. All changes will be noted in the Document History section of the report.



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com