



802.11ac-VHT20 Power Spectral Density – Ant 1


Channel 36 (5180MHz)

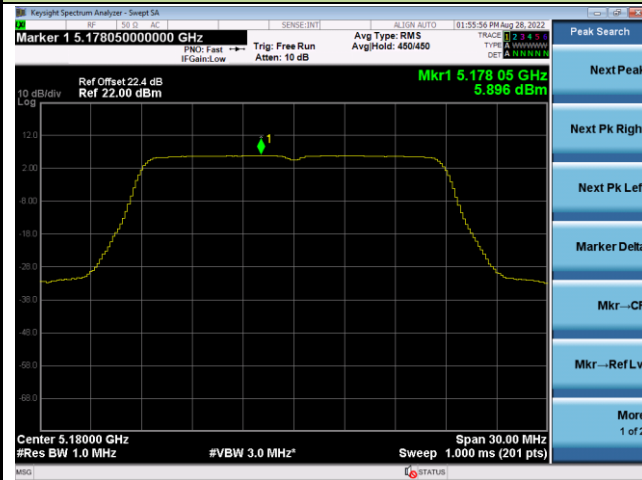


Channel 44 (5220MHz)

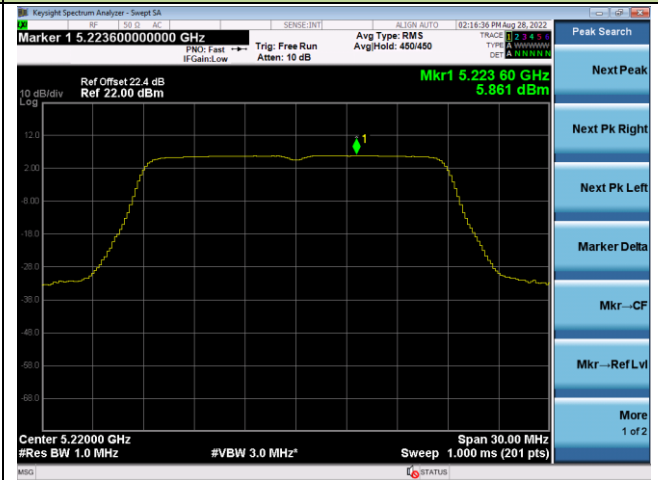


Channel 48 (5240MHz)

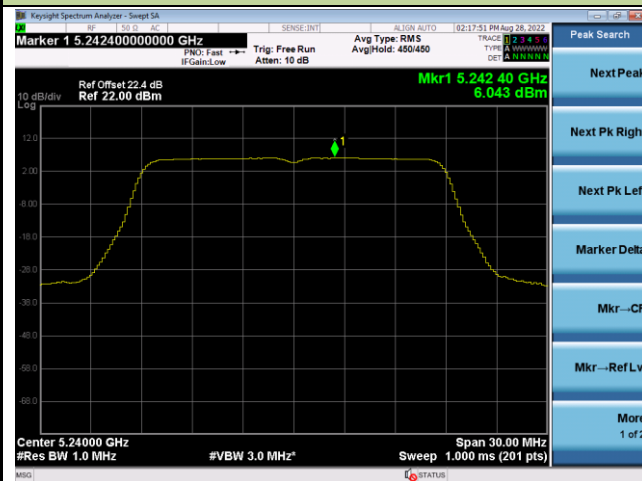


Channel 52 (5260MHz)

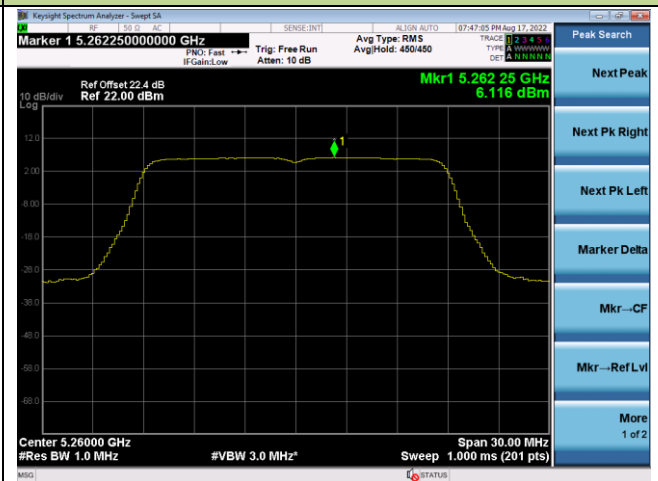


Channel 60 (5300MHz)

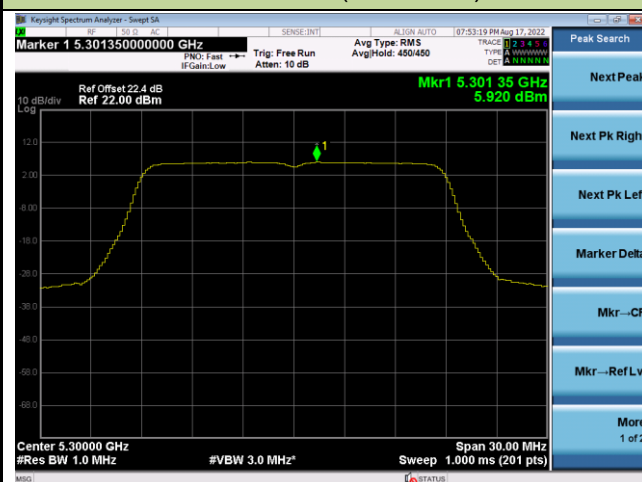

Channel 64 (5320MHz)

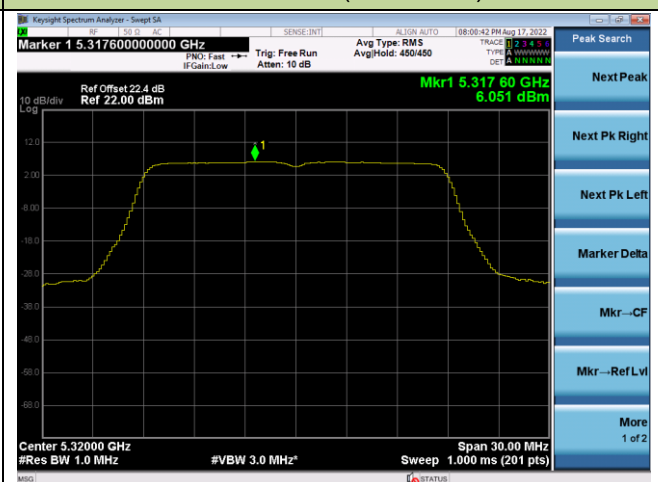


802.11ac-VHT20 Power Spectral Density – Ant 1

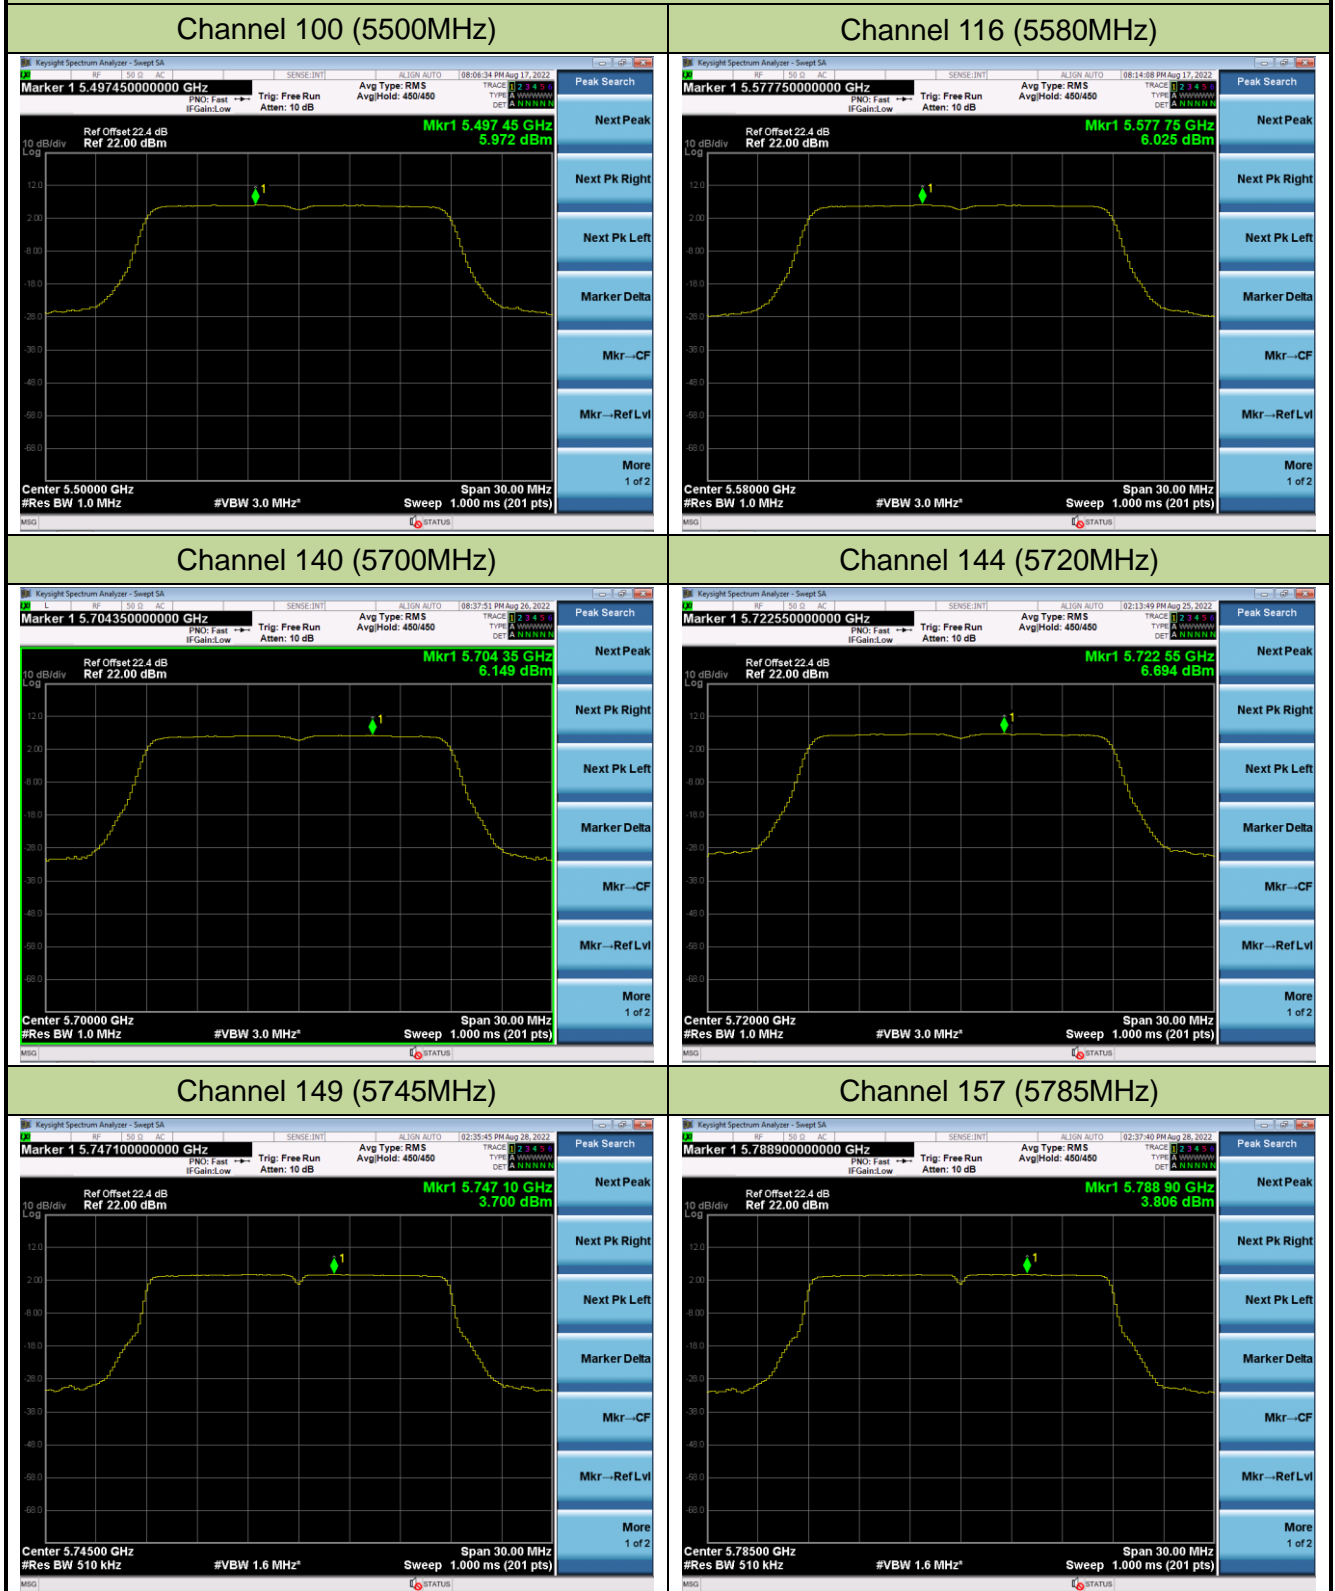


802.11ac-VHT20 Power Spectral Density – Ant 1

Channel 165 (5825MHz)

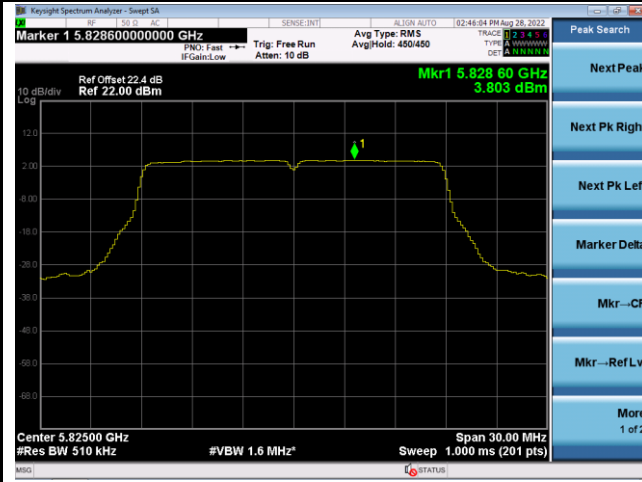


802.11ac-VHT40 Power Spectral Density – Ant 1


Channel 38 (5190MHz)

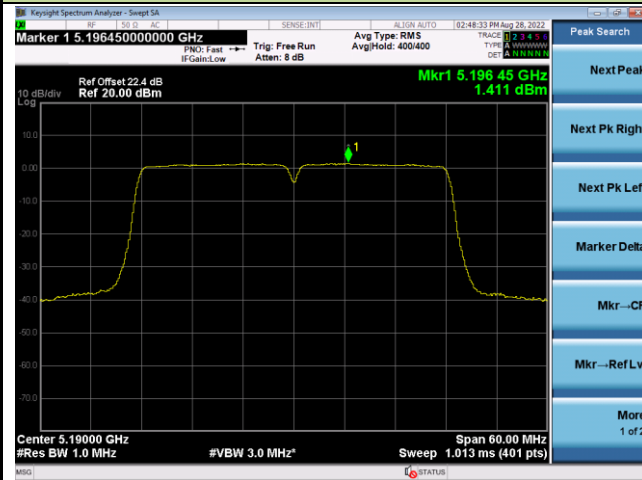


Channel 46 (5230MHz)

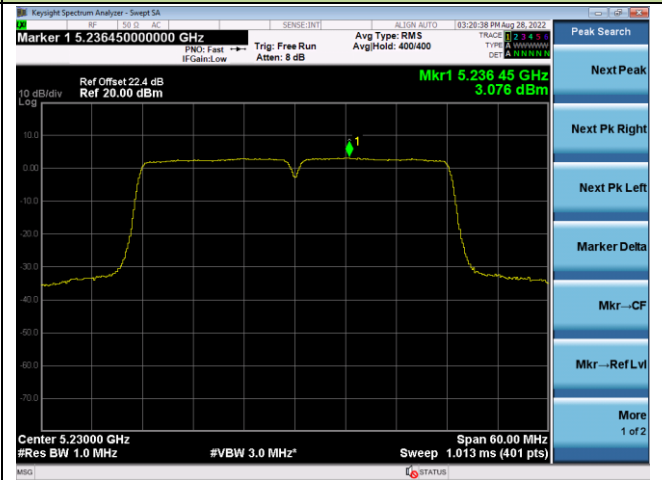


Channel 54 (5270MHz)

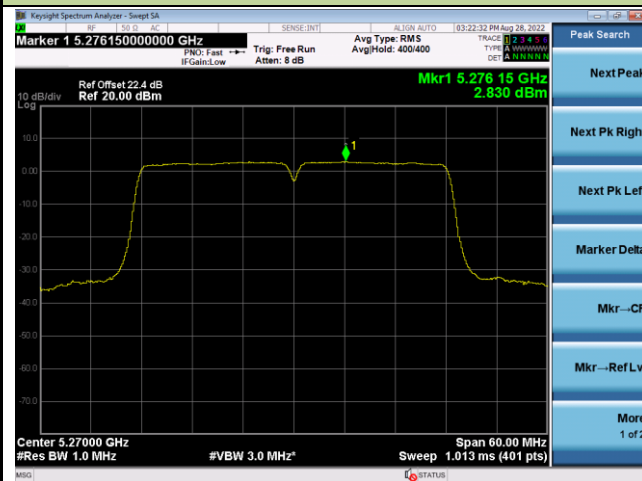


Channel 62 (5310MHz)

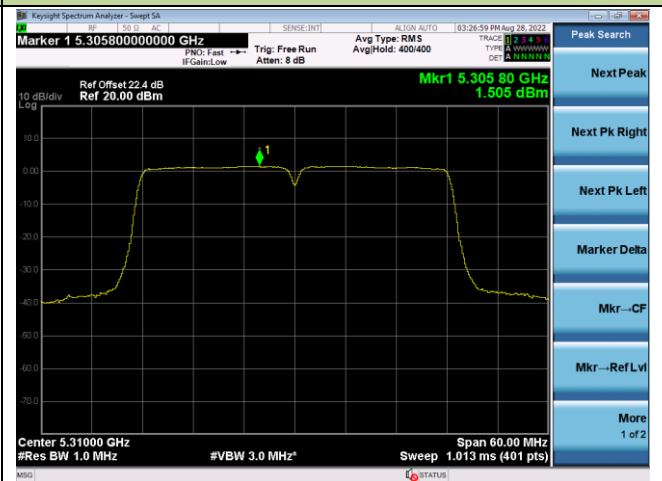

Channel 102 (5510MHz)

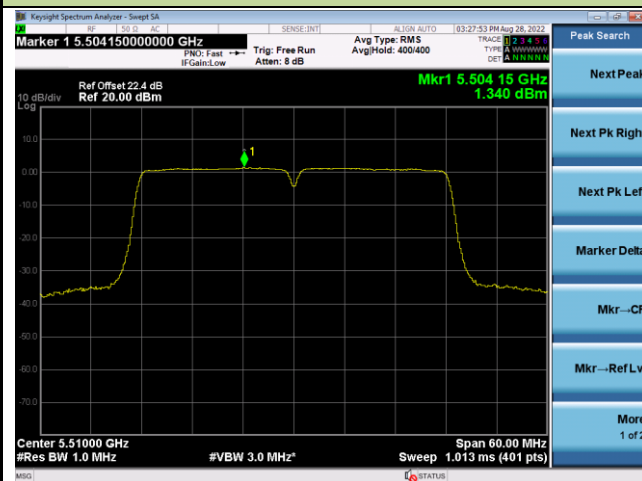


Channel 110 (5550MHz)

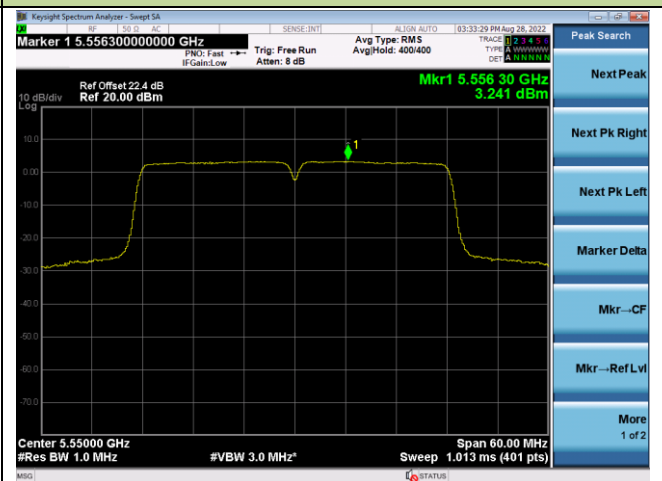


802.11ac-VHT40 Power Spectral Density – Ant 1


Channel 134 (5670MHz)

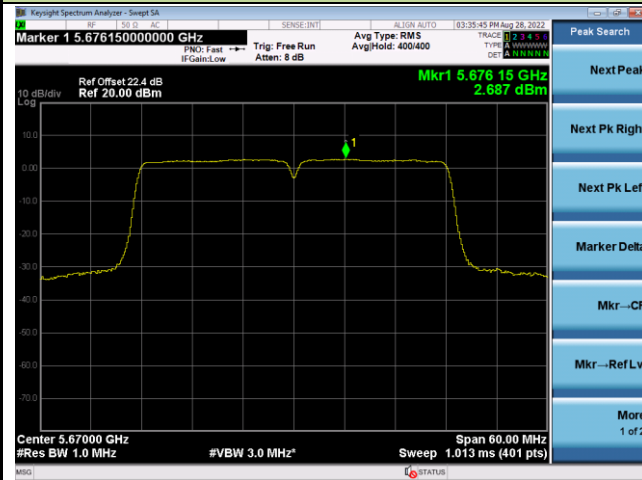


Channel 142 (5710MHz)

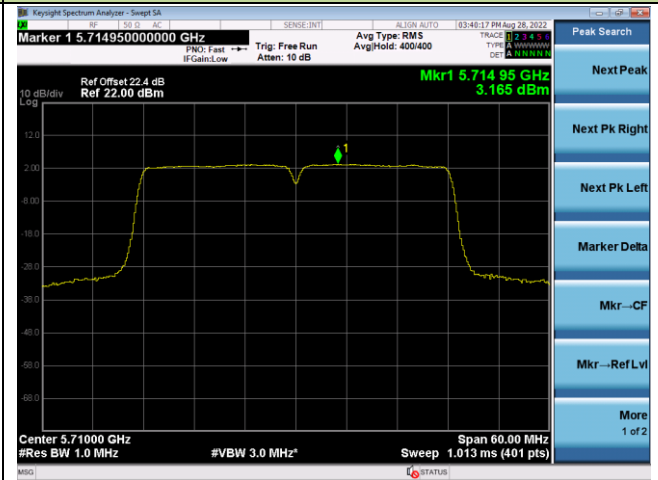

Channel 151 (5755MHz)

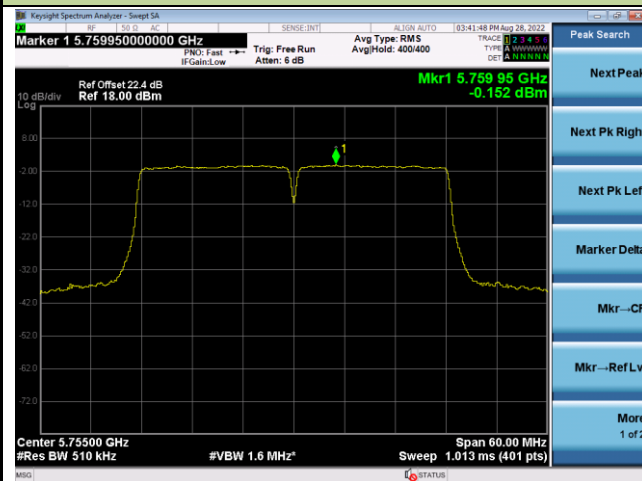


Channel 159 (5795MHz)

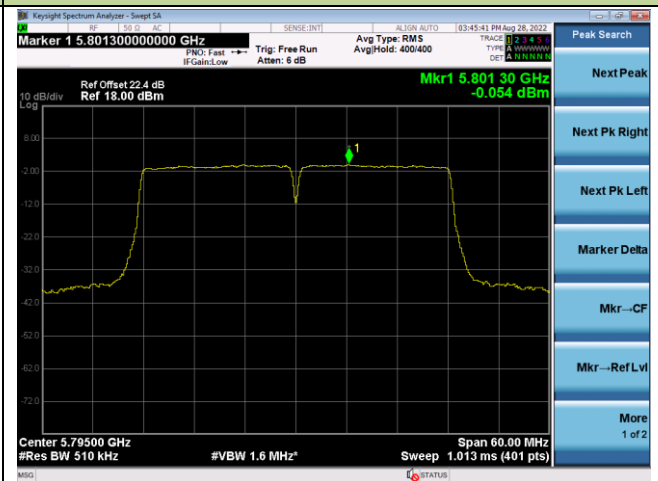


802.11ac-VHT80 Power Spectral Density – Ant 1


Channel 42 (5210MHz)

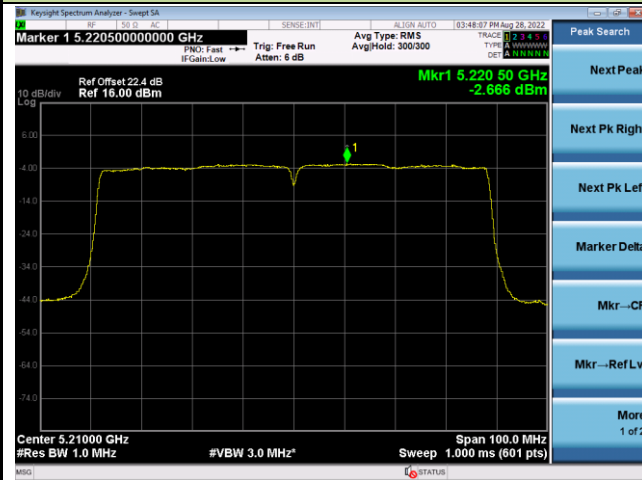

Channel 58 (5290MHz)

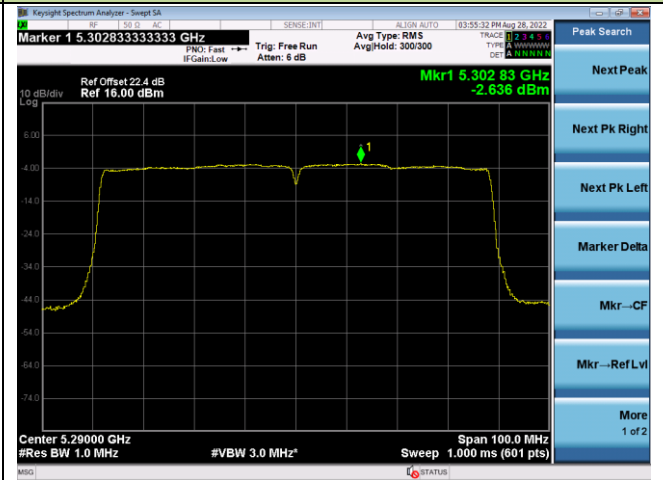


Channel 106 (5530MHz)

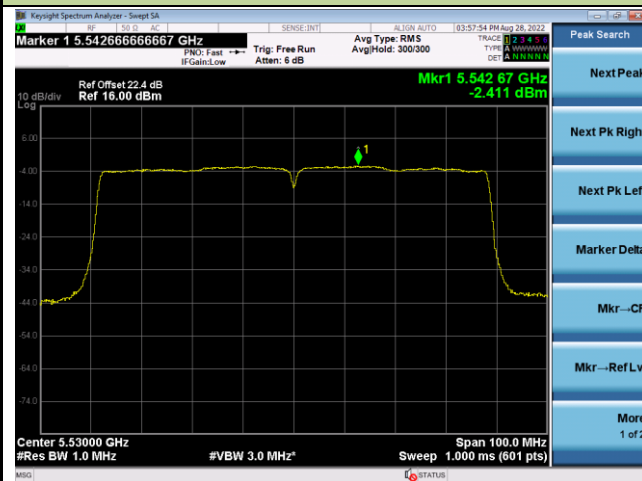

Channel 122 (5610MHz)



Channel 138 (5690MHz)

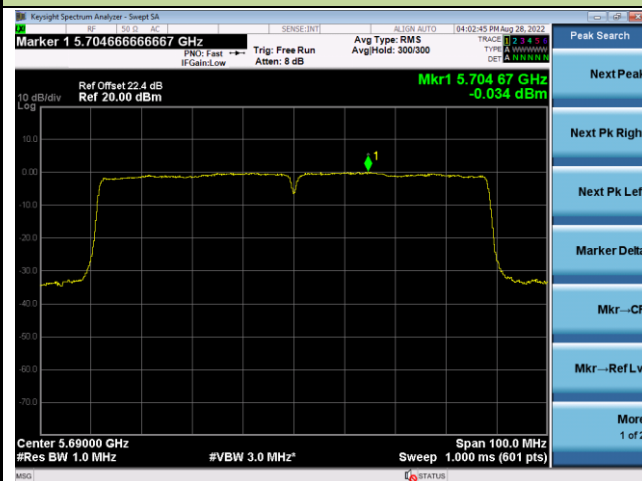


Channel 155 (5775MHz)




802.11ax-HE20 Power Spectral Density – Ant 1


Channel 36 (5180MHz)

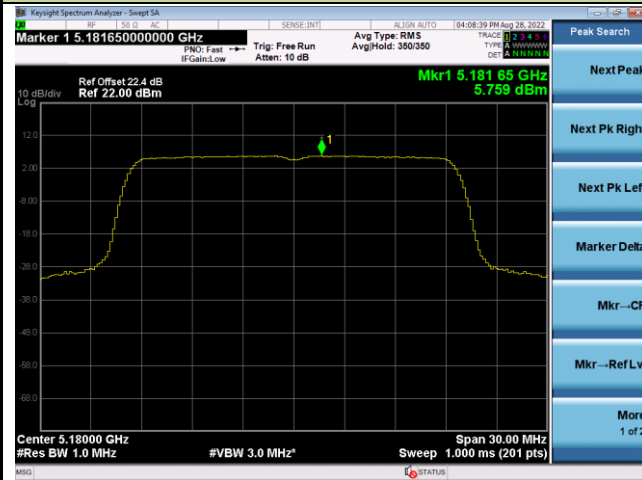


Channel 44 (5220MHz)

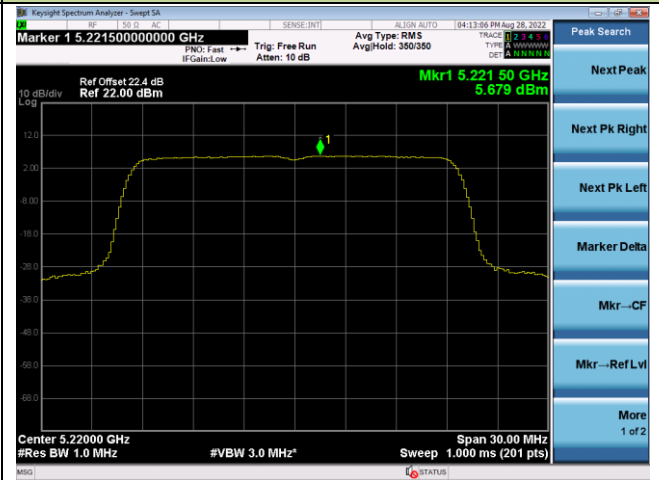


Channel 48 (5240MHz)

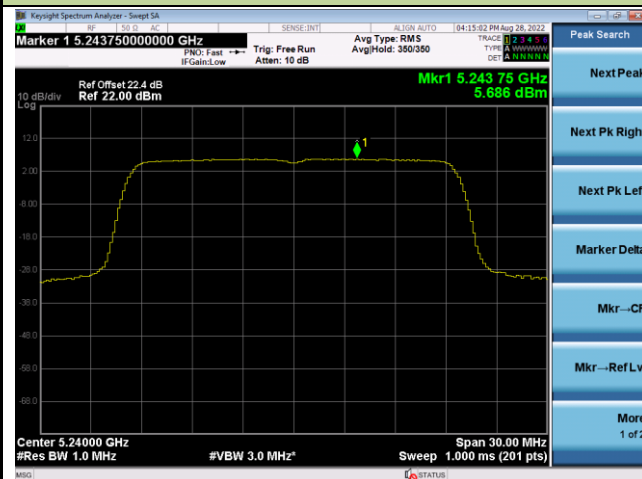


Channel 52 (5260MHz)

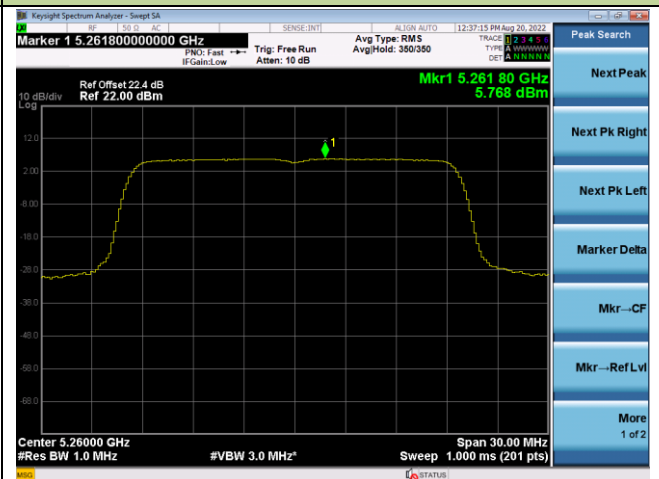

Channel 60 (5300MHz)

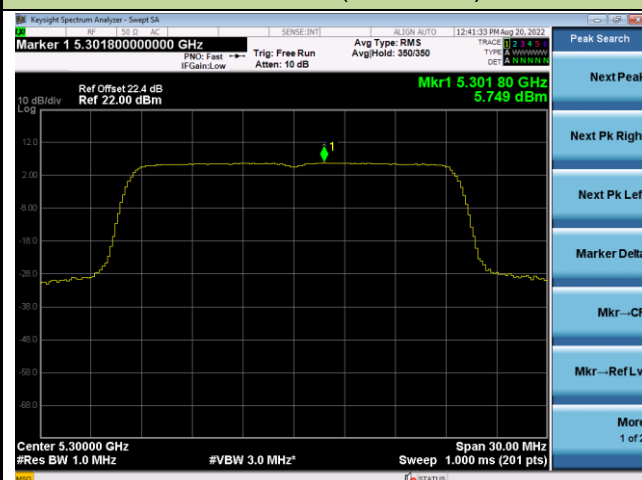


Channel 64 (5320MHz)

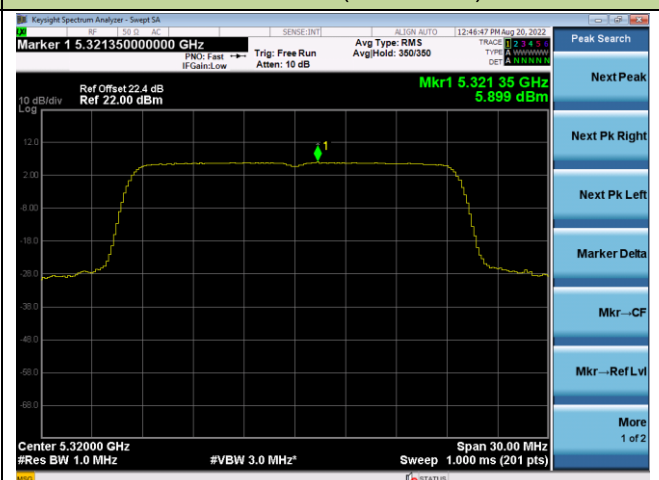


802.11ax-HE20 Power Spectral Density – Ant 1


Channel 100 (5500MHz)

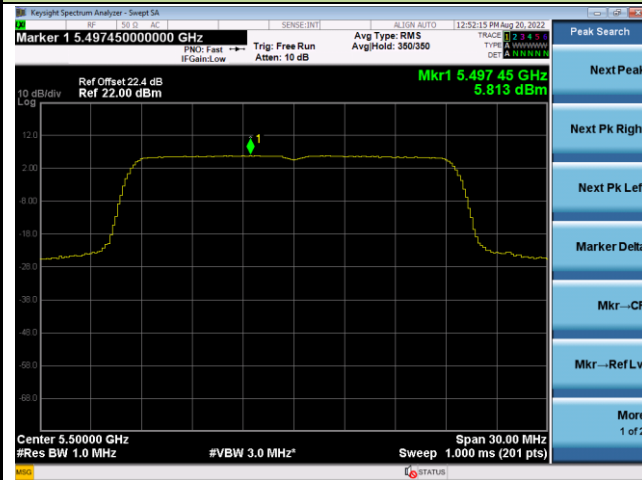


Channel 116 (5580MHz)

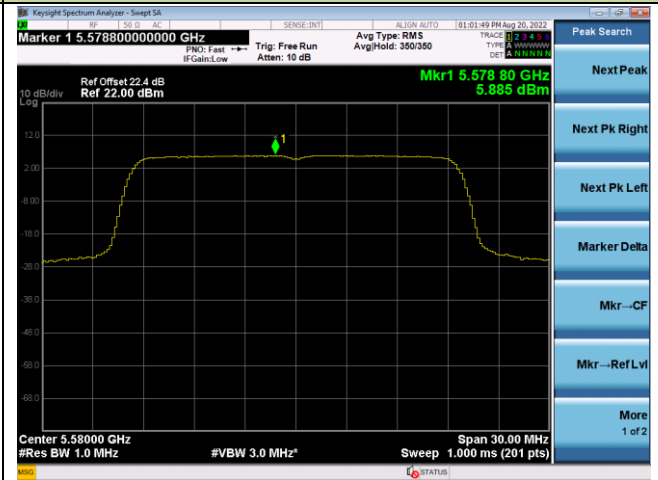


Channel 140 (5700MHz)

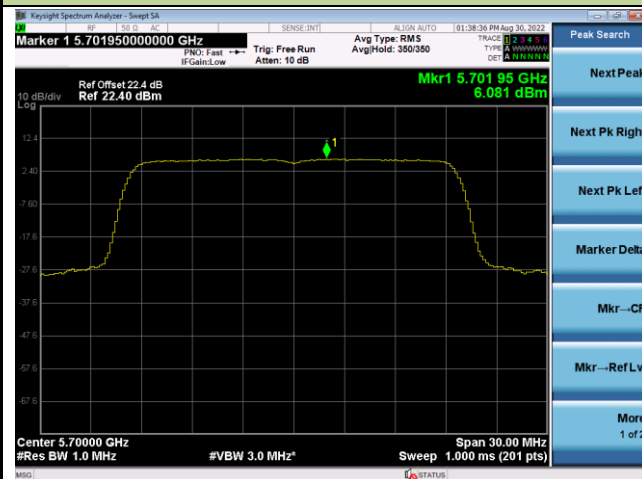


Channel 144 (5720MHz)

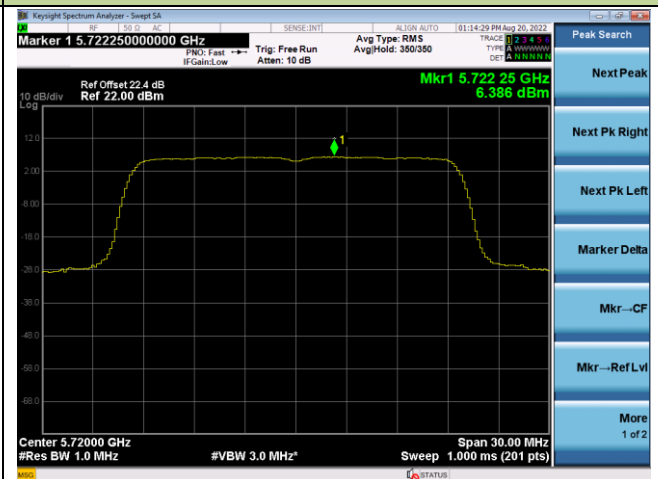

Channel 149 (5745MHz)

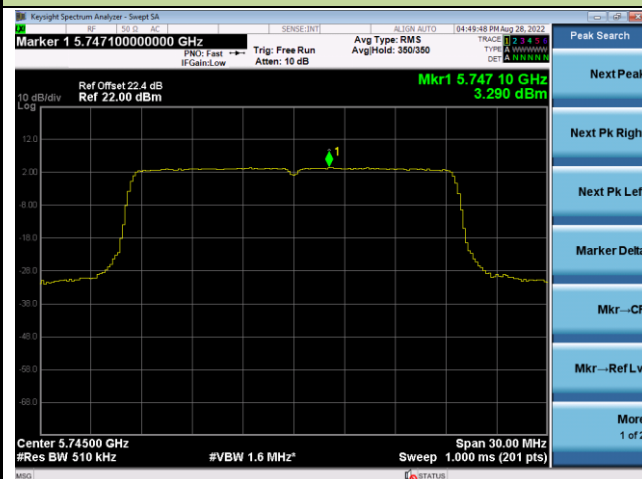


Channel 157 (5785MHz)

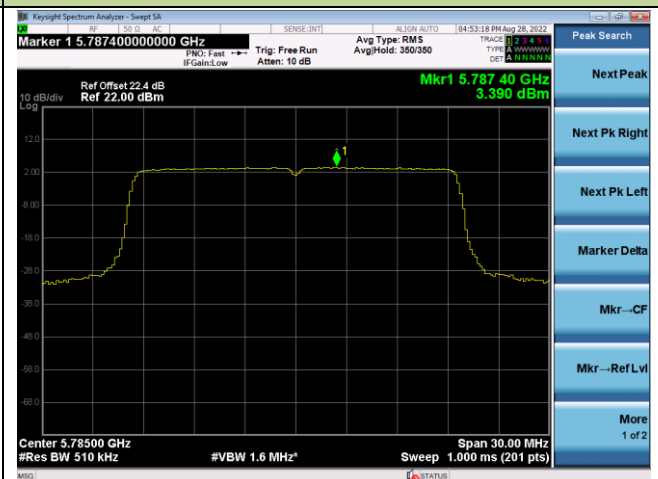


802.11ax-HE20 Power Spectral Density – Ant 1

Channel 165 (5825MHz)

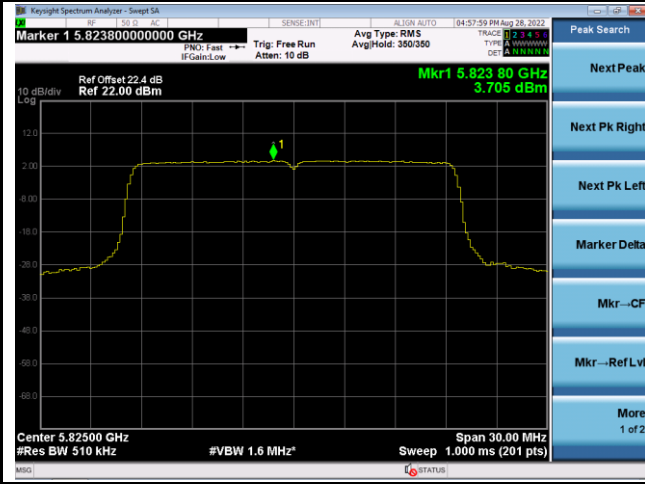


802.11ax-HE40 Power Spectral Density – Ant 1


Channel 38 (5190MHz)

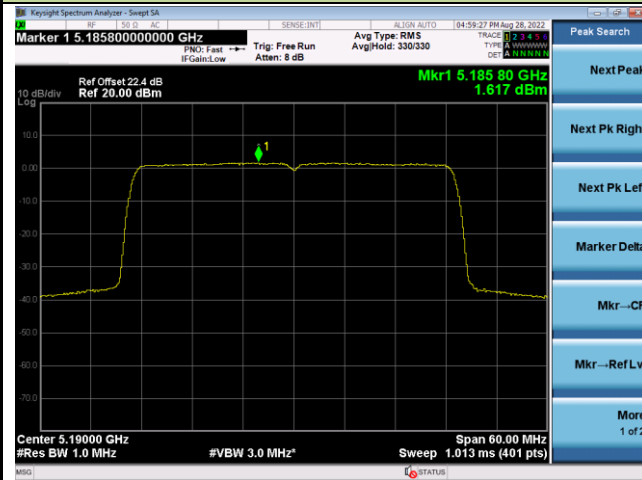


Channel 46 (5230MHz)

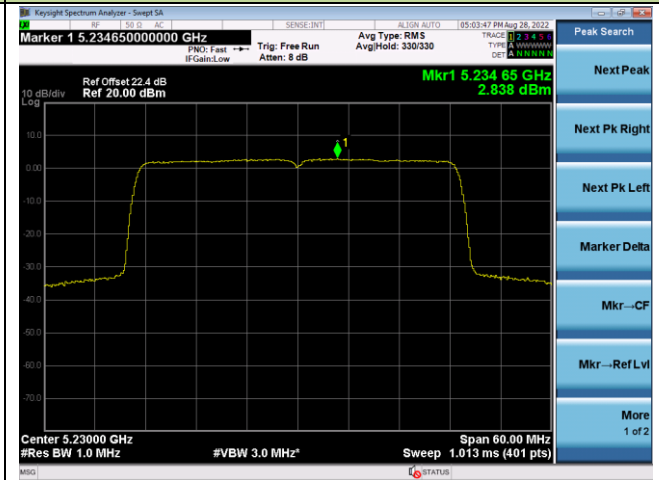


Channel 54 (5270MHz)

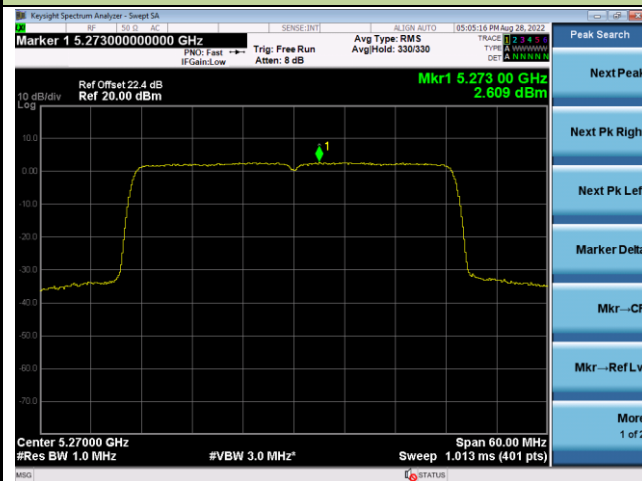


Channel 62 (5310MHz)

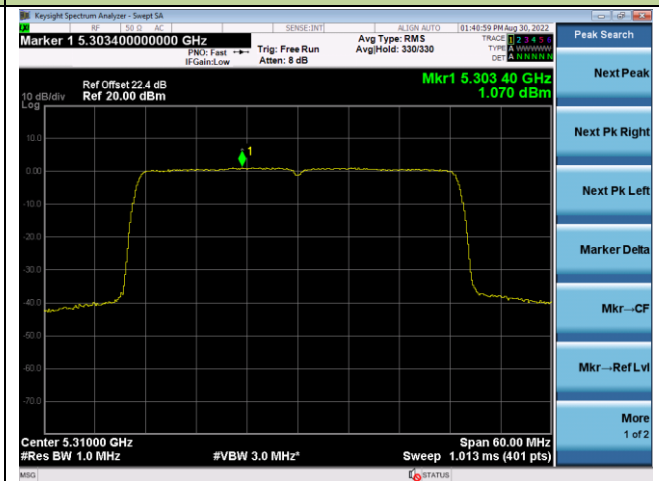

Channel 102 (5510MHz)

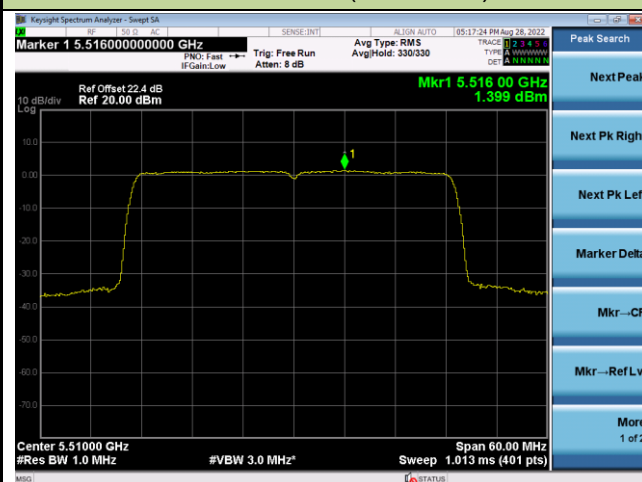


Channel 110 (5550MHz)

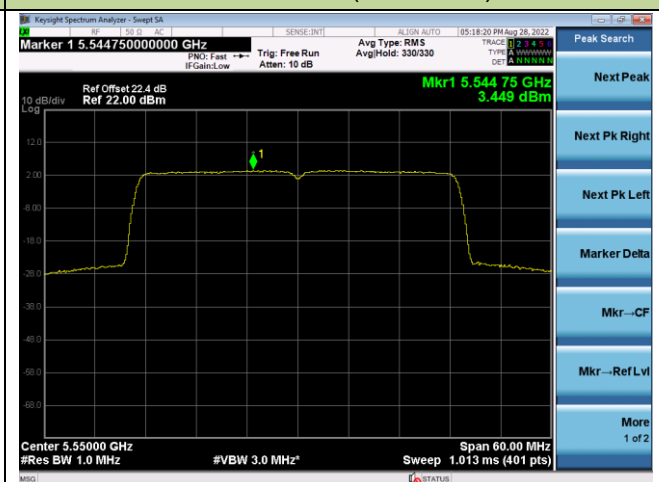


802.11ax-HE40 Power Spectral Density – Ant 1

Channel 134 (5670MHz)

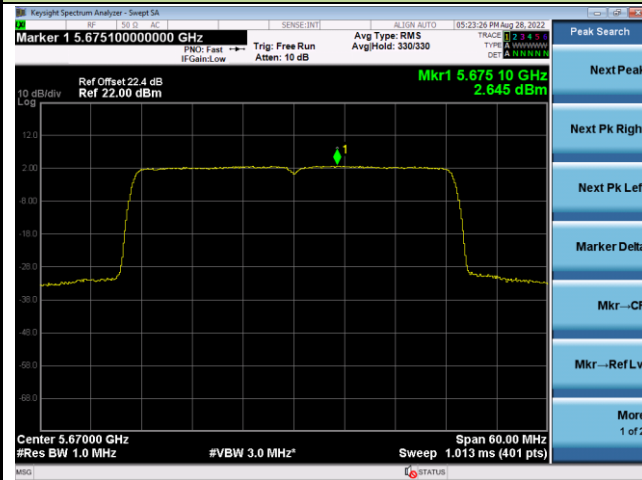


Channel 142 (5710MHz)

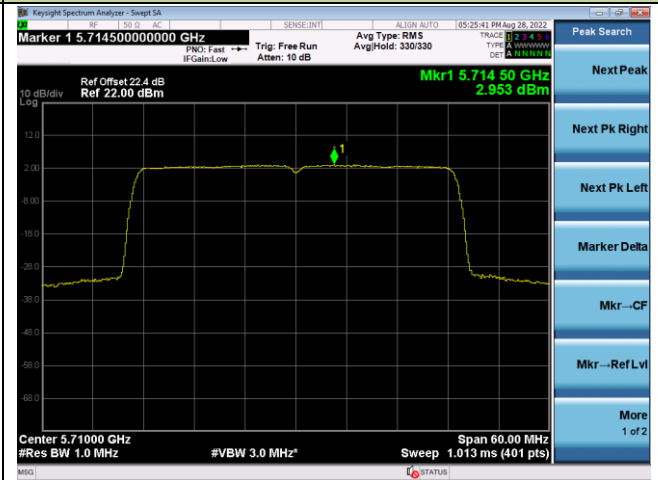

Channel 151 (5755MHz)




Channel 159 (5795MHz)

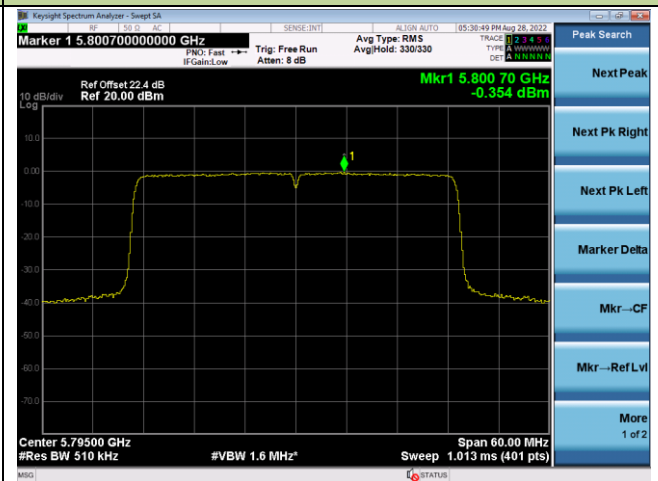


802.11ax-HE80 Power Spectral Density – Ant 1


Channel 42 (5210MHz)

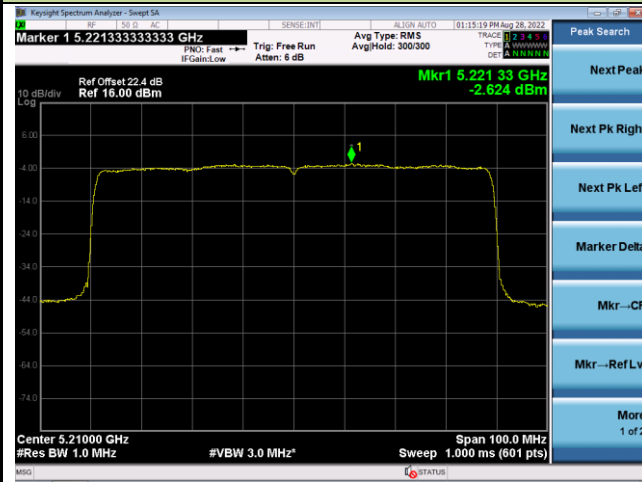


Channel 58 (5290MHz)

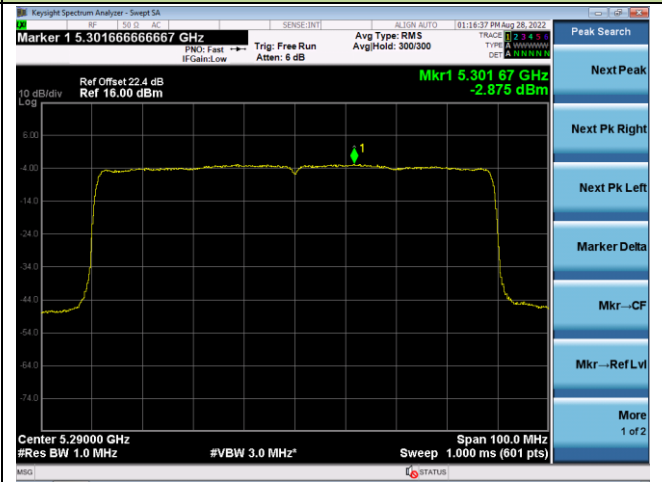


Channel 106 (5530MHz)

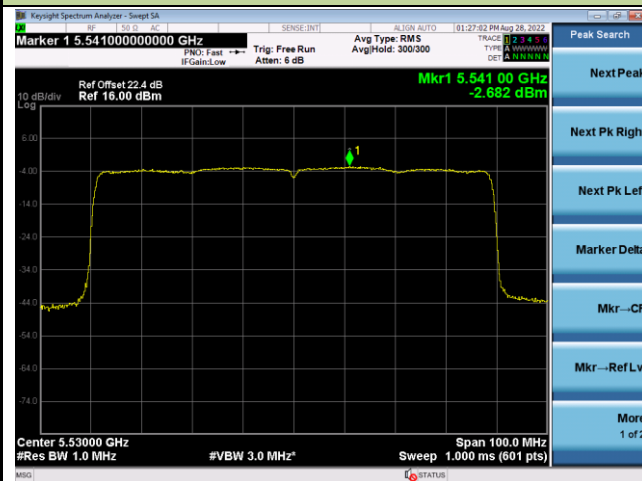

Channel 122 (5610MHz)

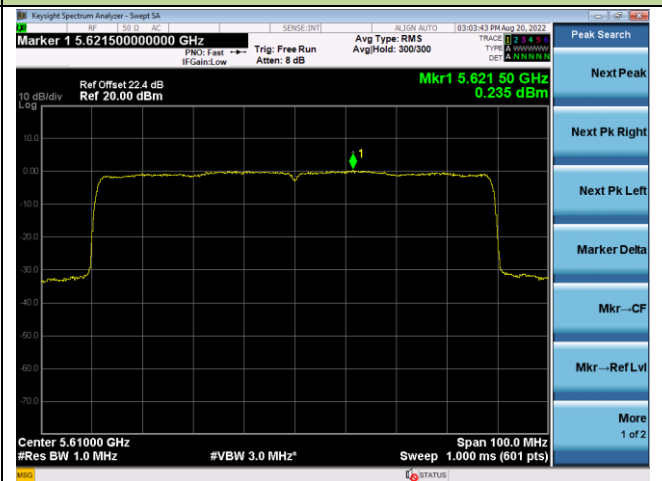

Channel 138 (5690MHz)

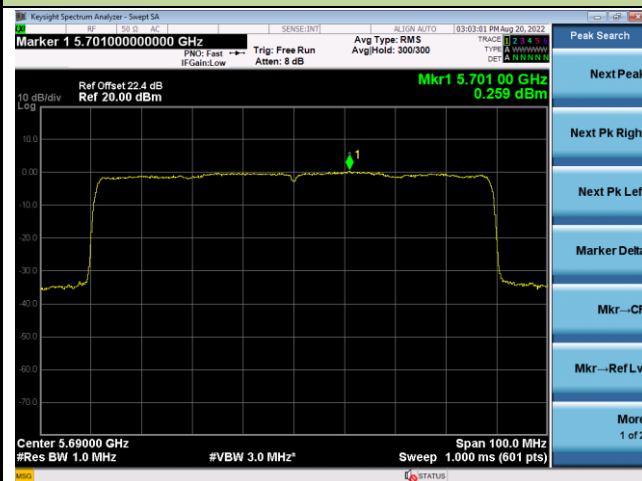

Channel 155 (5775MHz)



7.6. Frequency Stability Measurement

7.6.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5GHz band (IEEE 802.11 specification).

7.6.2. Test Procedure Used

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.6.3. Test Setup

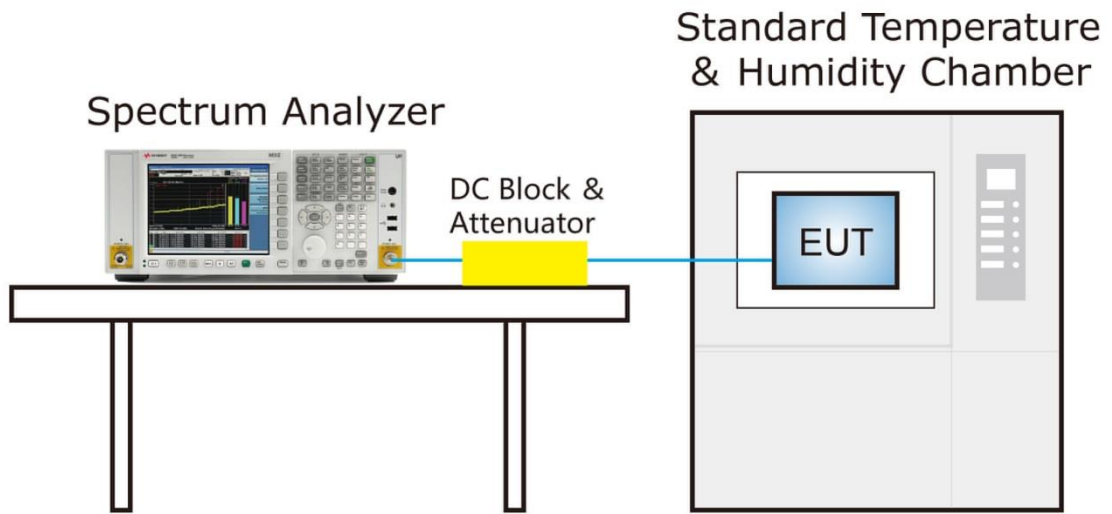

7.6.4. Test Result

Product	ACCESS POINT	Temperature	24°C
Test Engineer	Eric Lin	Relative Humidity	49%
Test Site	SR2	Test Date	2022-09-05
Test Mode	5500MHz (Carrier Mode)		

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	120	- 30	10.78	10.40	10.21	10.11
		- 20	11.85	11.85	11.84	11.82
		- 10	10.98	11.07	11.13	11.18
		0	7.99	8.39	8.60	8.73
		+ 10	0.41	2.56	3.70	4.29
		+ 20	-5.30	-5.76	-6.08	-6.24
		+ 30	-6.18	-4.46	-4.14	-3.99
		+ 40	-8.64	-8.35	-7.90	-7.78
		+ 50	-8.56	-8.86	-9.35	-9.67
115	138	+ 20	-6.53	-6.58	-6.93	-7.01
85	102	+ 20	-6.44	-6.56	-6.99	-7.05

Note: Frequency Tolerance (ppm) = $\frac{[Measured\ Frequency\ (Hz) - Declared\ Frequency\ (Hz)]}{Declared\ Frequency\ (Hz)} * 10^6$.

7.7. Radiated Spurious Emission Measurement

7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

KDB 789033 D02v02r01 – Section G

7.7.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.

802.11a	VBW = 470Hz	802.11ax-HE20	VBW = 680Hz
802.11ac-VHT20	VBW = 510Hz	802.11ax-HE40	VBW = 1.3kHz
802.11ac-VHT40	VBW = 1.1kHz	802.11ax-HE80	VBW = 2.7kHz
802.11ac-VHT80	VBW = 2.2kHz	N/A	N/A


4. Detector = Peak
5. Sweep time = auto

6. Trace mode = max hold


7. Trace was allowed to stabilize

7.7.4. Test Setup

Below 1GHz Test Setup:

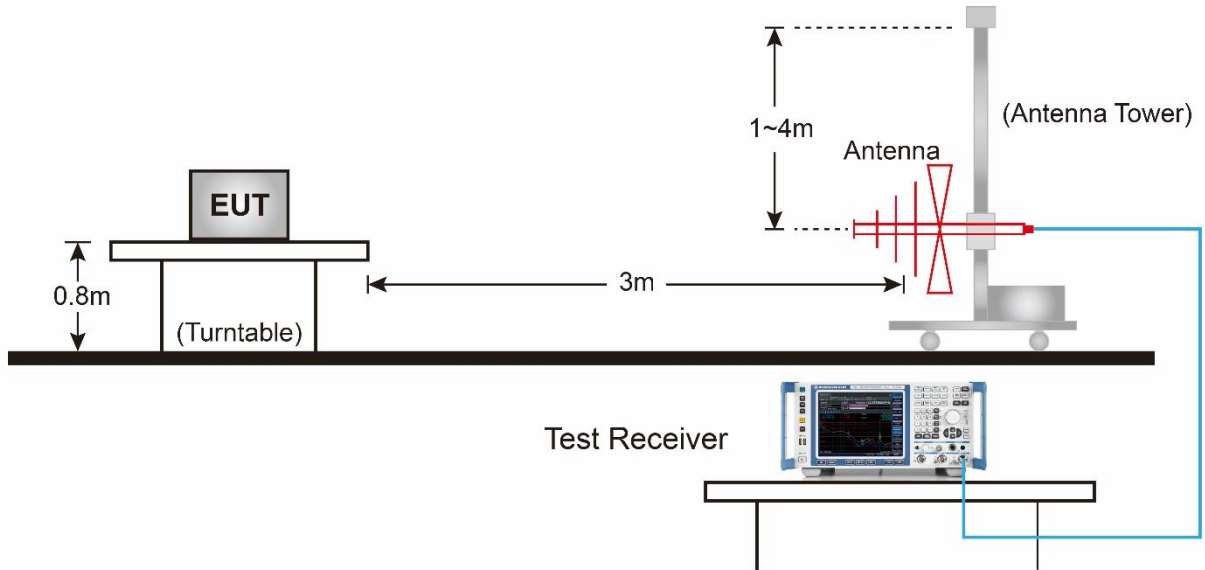


Above 1GHz Test Setup:

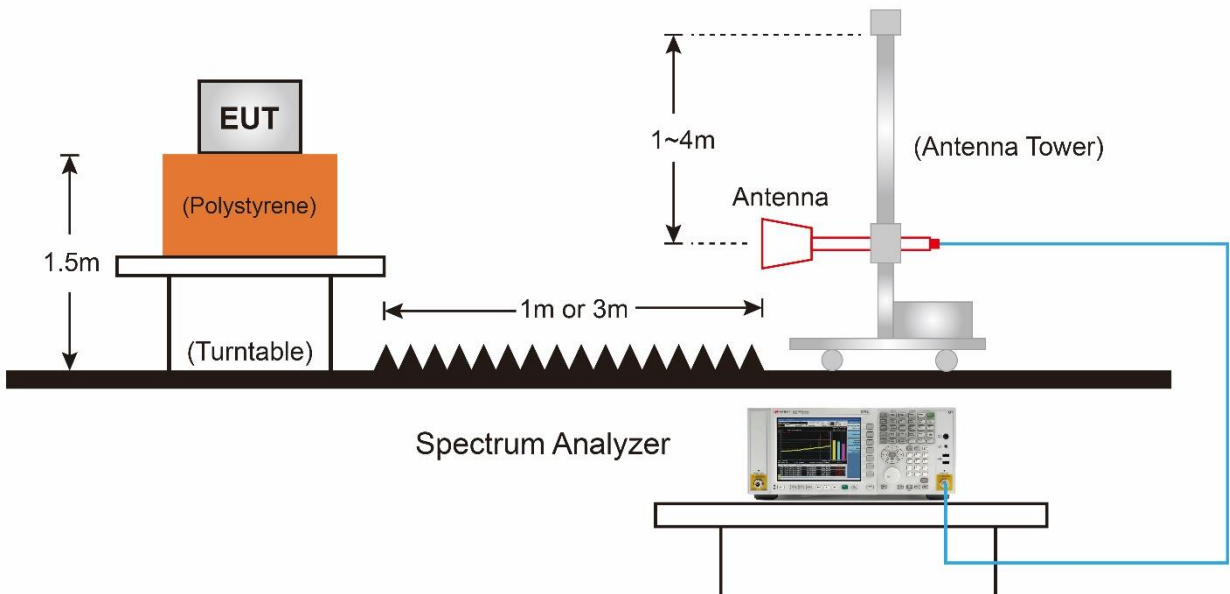

7.7.5. Test Result

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5180MHz	Test Voltage	120V/60Hz

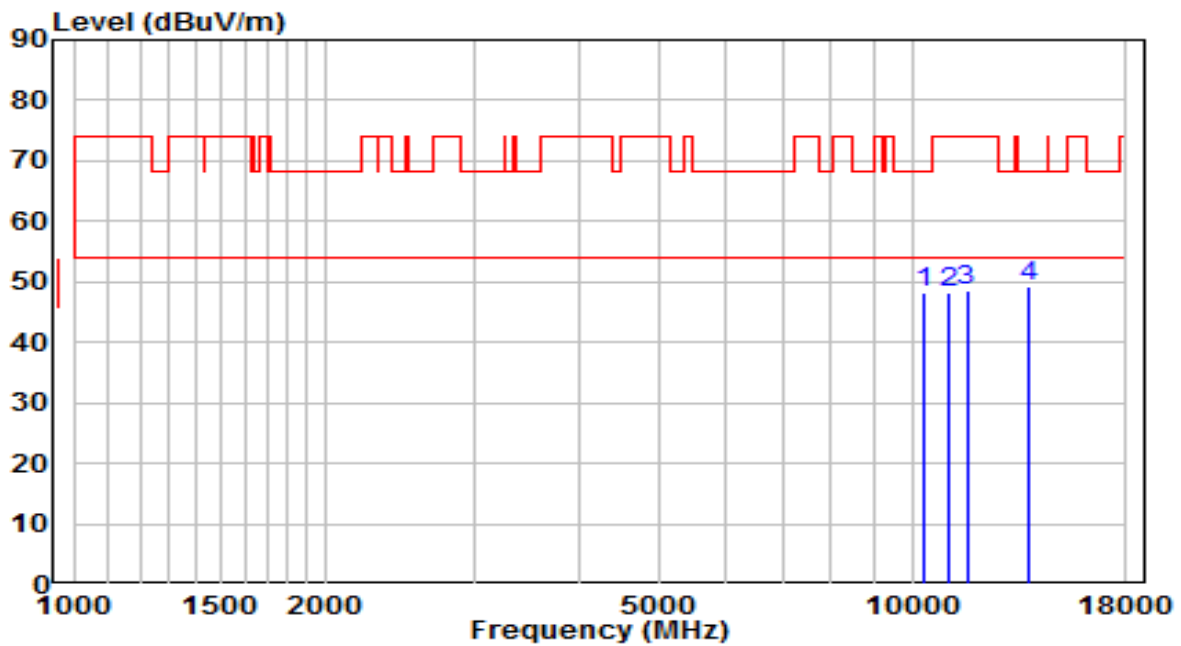


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10299.000	30.40	17.66	48.06	-20.14	68.20	Peak
2	11064.000	29.20	19.16	48.36	-25.64	74.00	Peak
3	11616.500	28.60	19.80	48.40	-25.60	74.00	Peak
4	* 13784.000	26.68	22.46	49.14	-19.06	68.20	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
- Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5180MHz	Test Voltage	120V/60Hz

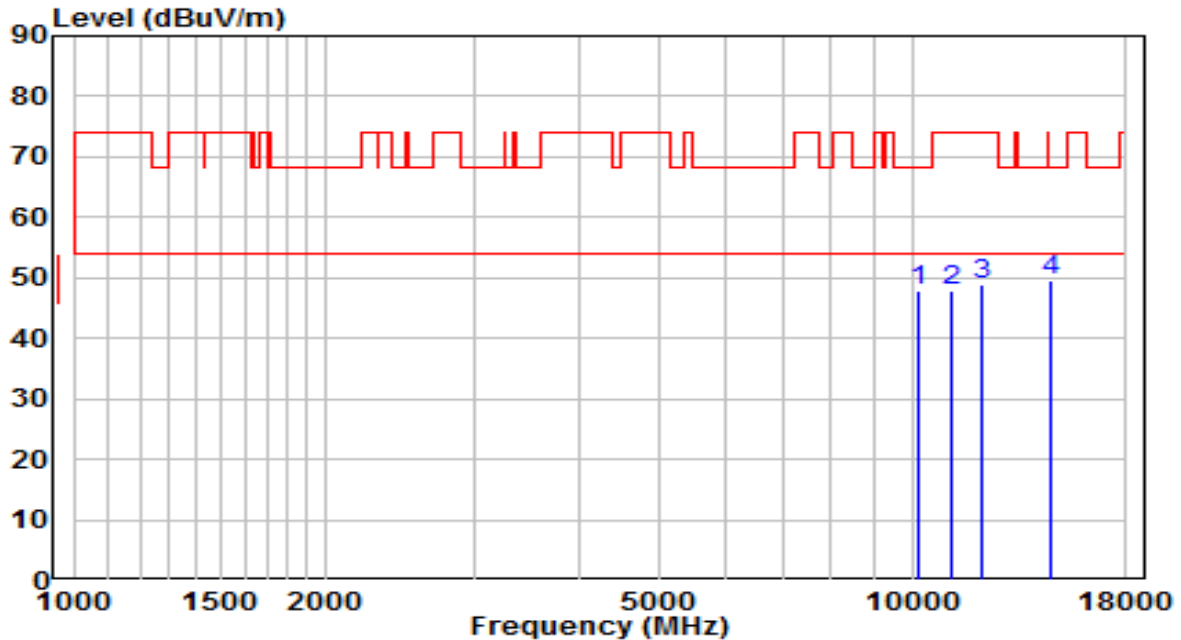


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	10205.500	30.57	17.27	47.84	-20.36	68.20	Peak
2	11123.500	28.58	19.28	47.86	-26.14	74.00	Peak
3	12135.000	30.00	18.84	48.85	-25.15	74.00	Peak
4	* 14659.500	26.92	22.58	49.49	-18.71	68.20	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (Correction Factor).
- Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5220MHz	Test Voltage	120V/60Hz

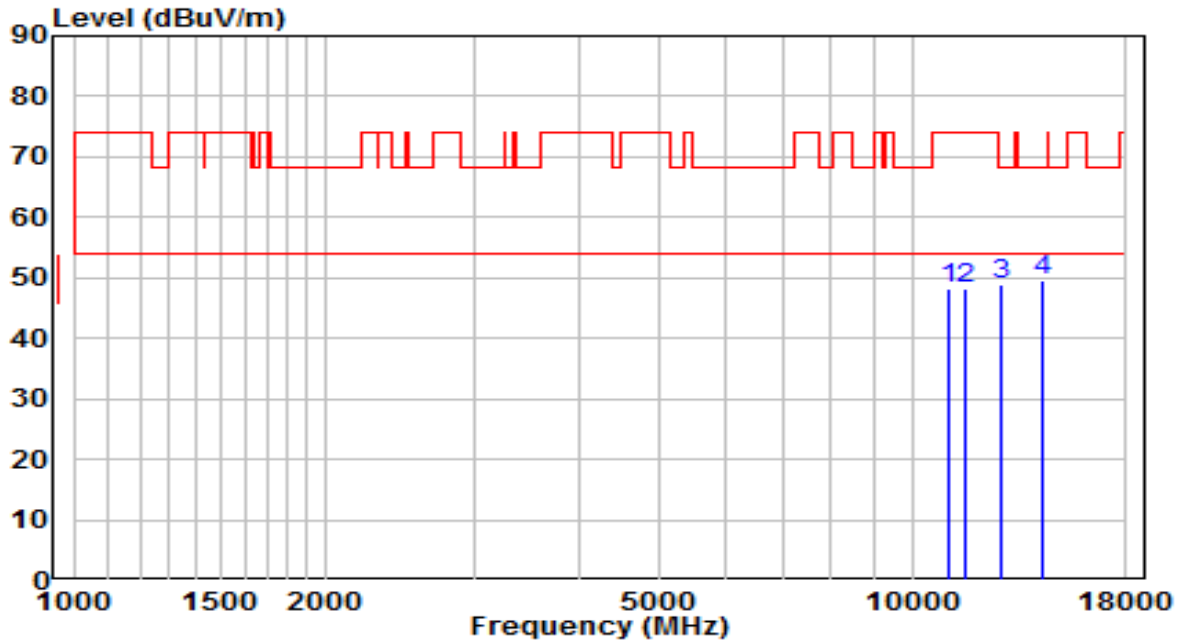


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	11038.500	29.09	19.11	48.20	-25.80	74.00	Peak
2	11582.500	28.40	19.87	48.27	-25.73	74.00	Peak
3	12730.000	29.81	19.23	49.04	-19.16	68.20	Peak
4	* 14260.000	26.90	22.70	49.60	-18.60	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5220MHz	Test Voltage	120V/60Hz

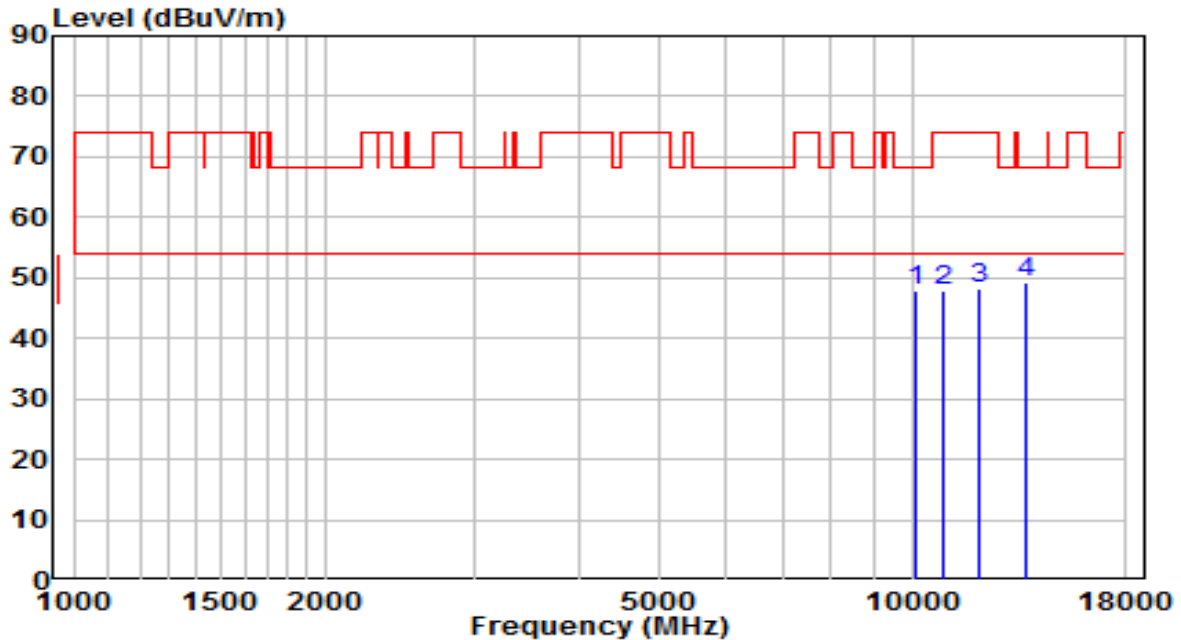


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10129.000	31.02	16.96	47.97	-20.23	68.20	Peak
2	10885.500	29.07	18.91	47.97	-26.03	74.00	Peak
3	12024.500	29.25	18.95	48.20	-25.80	74.00	Peak
4	* 13673.500	26.91	22.34	49.26	-18.94	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5240MHz	Test Voltage	120V/60Hz

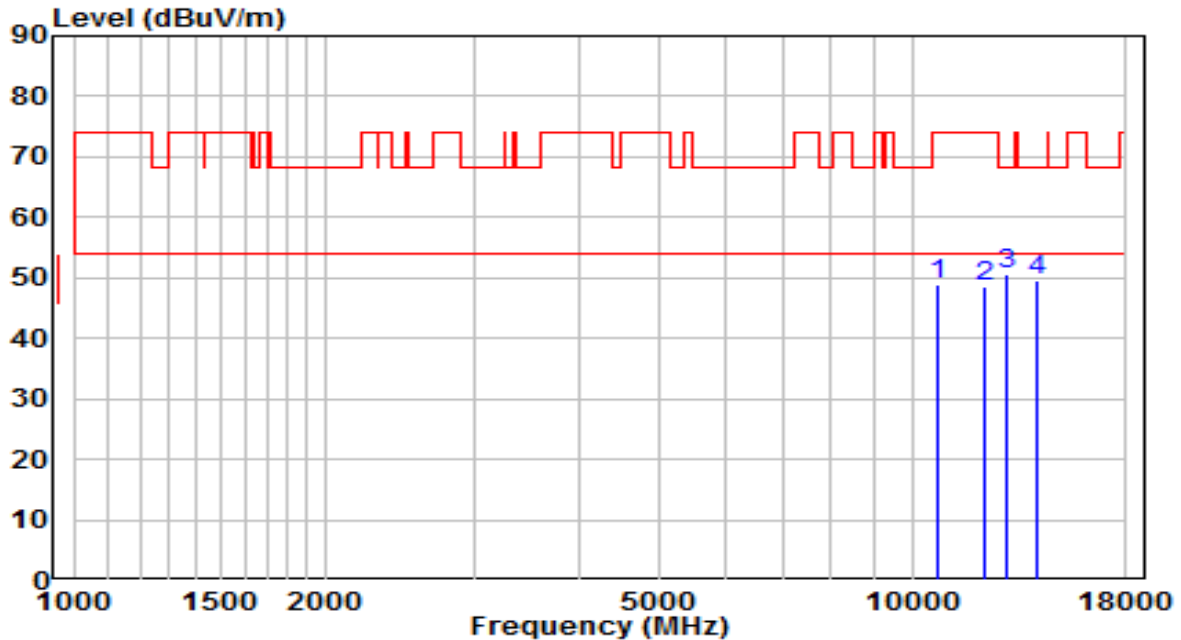


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10724.000	30.25	18.74	48.98	-25.02	74.00	Peak
2	12220.000	29.63	18.77	48.40	-25.60	74.00	Peak
3	* 12976.500	30.60	20.02	50.61	-17.59	68.20	Peak
4	14107.000	26.75	22.69	49.44	-18.76	68.20	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier (dB).
- Measurement (dB μ V/m) = Reading (dB μ V) + C.F (Correction Factor).
- Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5240MHz	Test Voltage	120V/60Hz

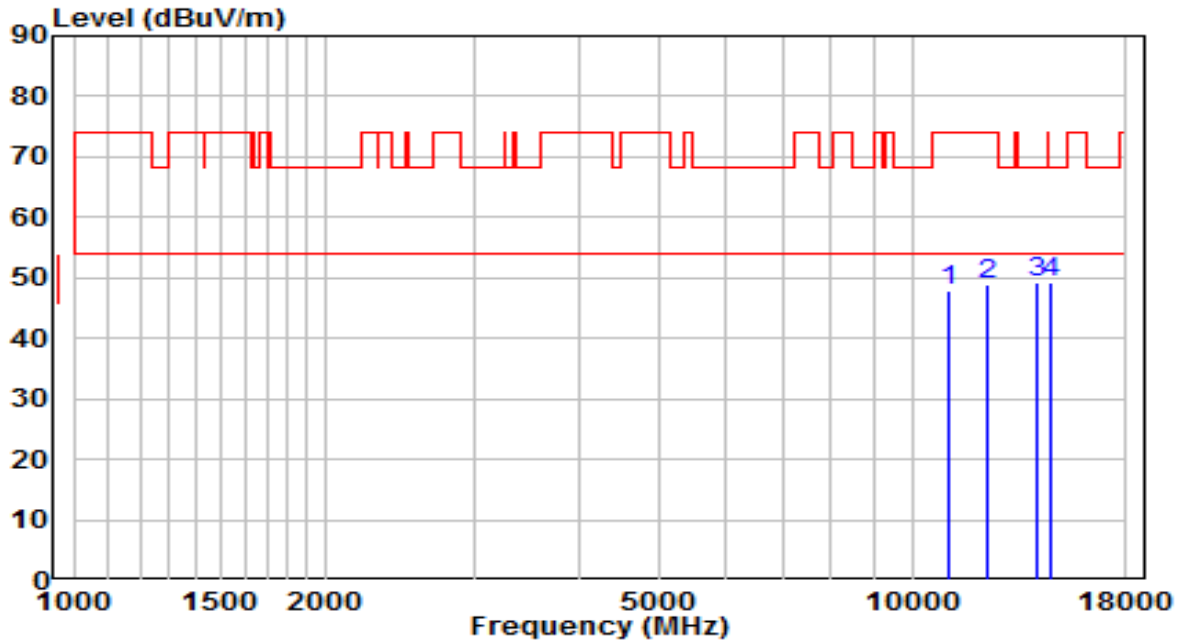


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	11064.000	28.72	19.16	47.88	-26.12	74.00	Peak
2	12322.000	30.12	18.67	48.79	-25.21	74.00	Peak
3	14115.500	26.43	22.69	49.12	-19.08	68.20	Peak
4	* 14600.000	26.70	22.63	49.33	-18.87	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5260MHz	Test Voltage	120V/60Hz

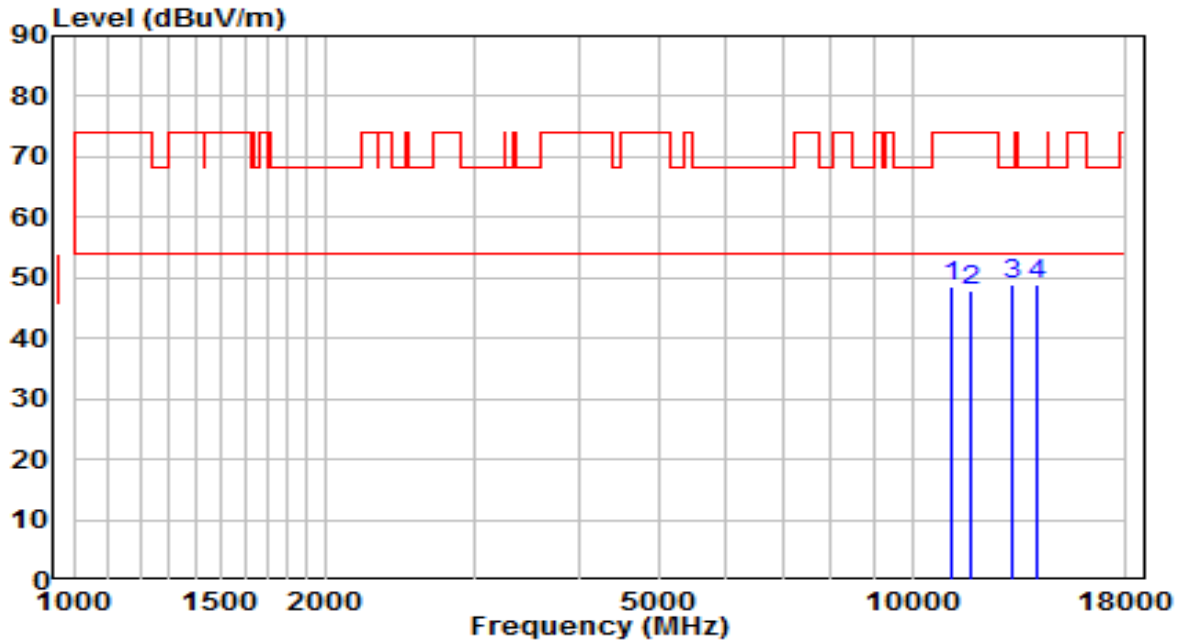


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	11115.000	29.22	19.26	48.49	-25.51	74.00	Peak
2	11761.000	28.42	19.49	47.91	-26.09	74.00	Peak
3	* 13138.000	28.27	20.66	48.93	-19.27	68.20	Peak
4	14090.000	26.17	22.69	48.86	-19.34	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5260MHz	Test Voltage	120V/60Hz

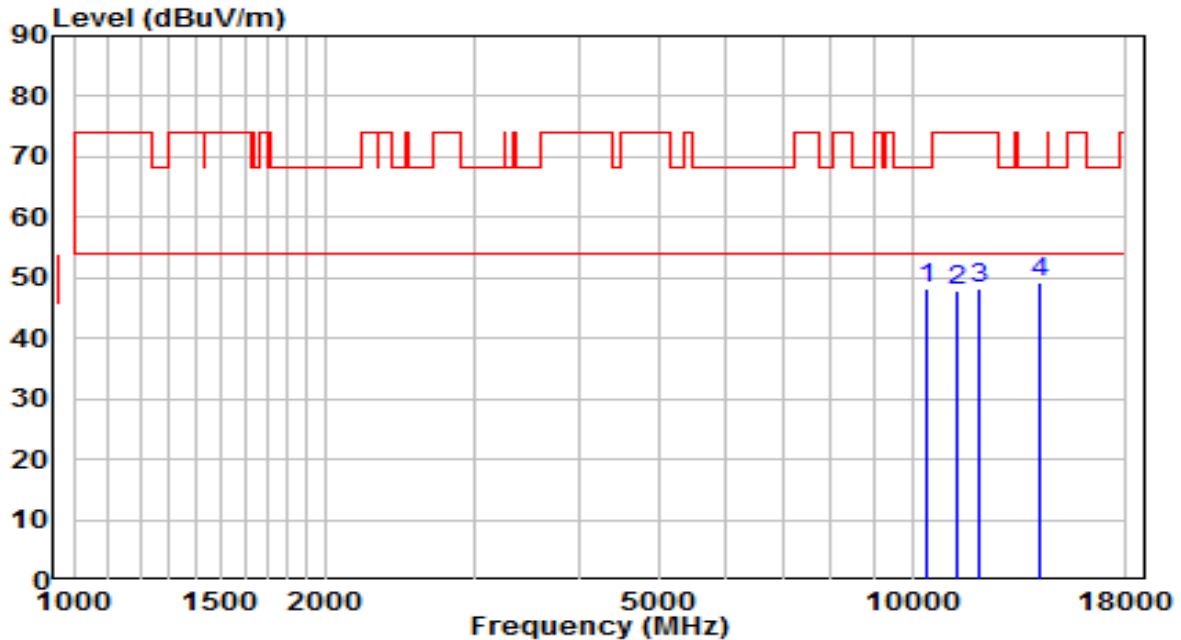


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10392.500	30.30	18.05	48.35	-19.85	68.20	Peak
2	11302.000	28.13	19.65	47.78	-26.22	74.00	Peak
3	12041.500	29.42	18.93	48.35	-25.65	74.00	Peak
4	* 14183.500	26.59	22.70	49.29	-18.91	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5300MHz	Test Voltage	120V/60Hz

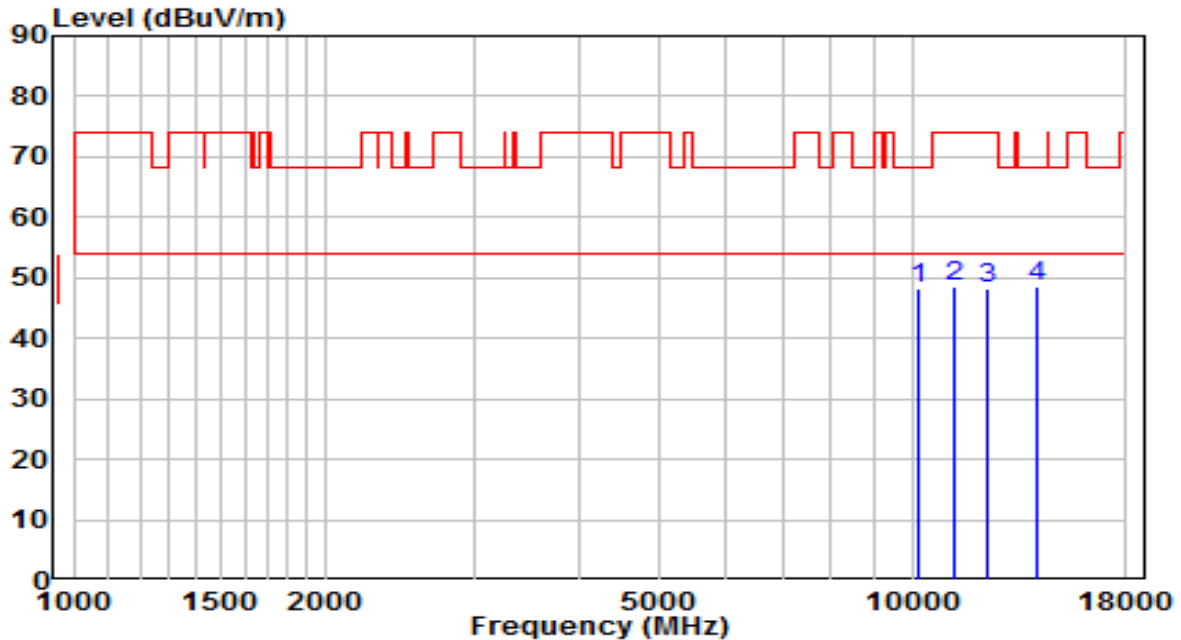


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10171.500	30.97	17.13	48.10	-20.10	68.20	Peak
2	11200.000	29.01	19.44	48.45	-25.55	74.00	Peak
3	12330.500	29.66	18.66	48.32	-25.68	74.00	Peak
4	* 14132.500	26.00	22.69	48.69	-19.51	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5300MHz	Test Voltage	120V/60Hz

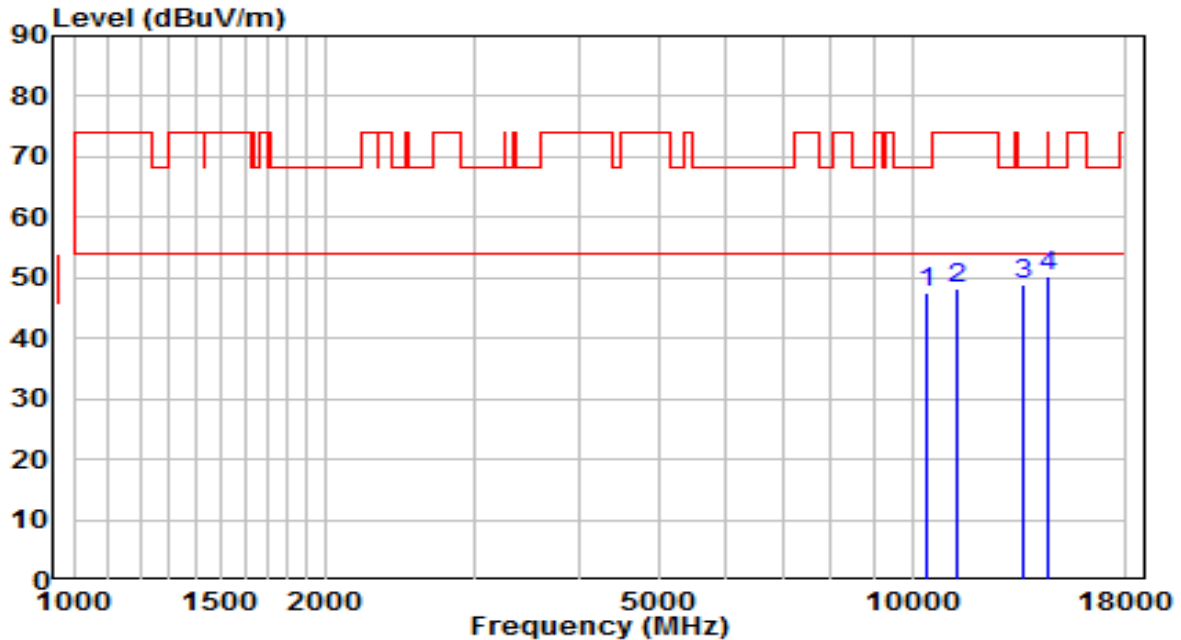


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10384.000	29.58	18.02	47.60	-20.60	68.20	Peak
2	11310.500	28.47	19.66	48.13	-25.87	74.00	Peak
3	* 13520.500	26.65	22.19	48.84	-19.36	68.20	Peak
4	14498.000	27.39	22.72	50.11	-23.89	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5320MHz	Test Voltage	120V/60Hz

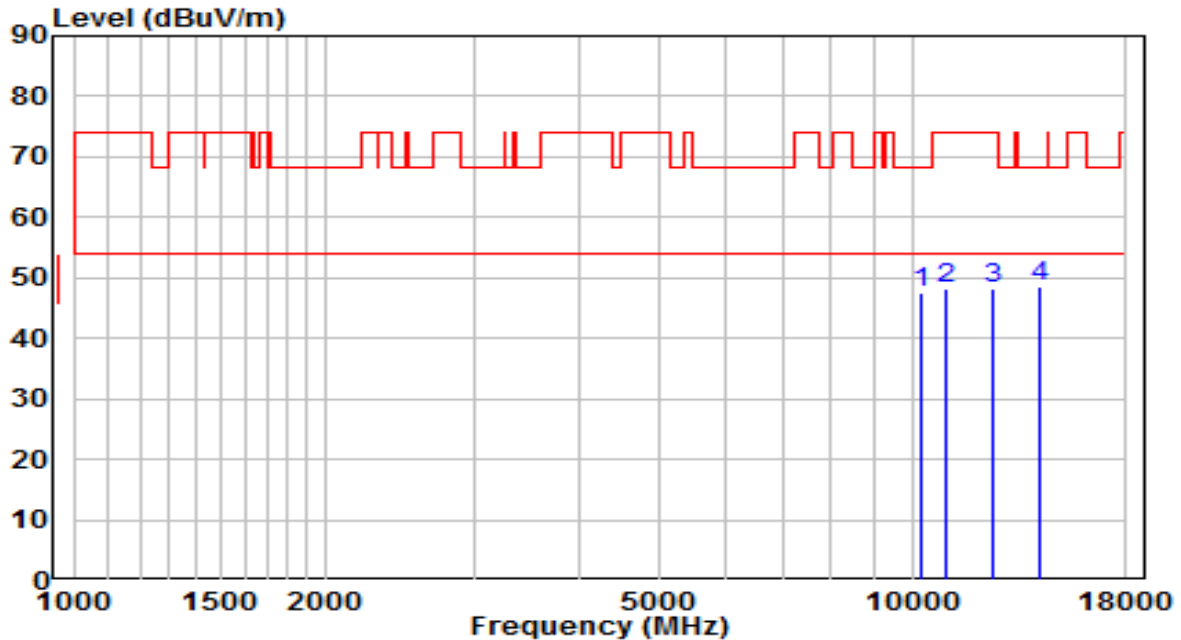


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	10265.000	29.91	17.52	47.43	-20.77	68.20	Peak
2	10979.000	29.30	19.01	48.31	-25.69	74.00	Peak
3	12441.000	29.79	18.56	48.35	-25.65	74.00	Peak
4	* 14217.500	25.95	22.70	48.65	-19.55	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5320MHz	Test Voltage	120V/60Hz

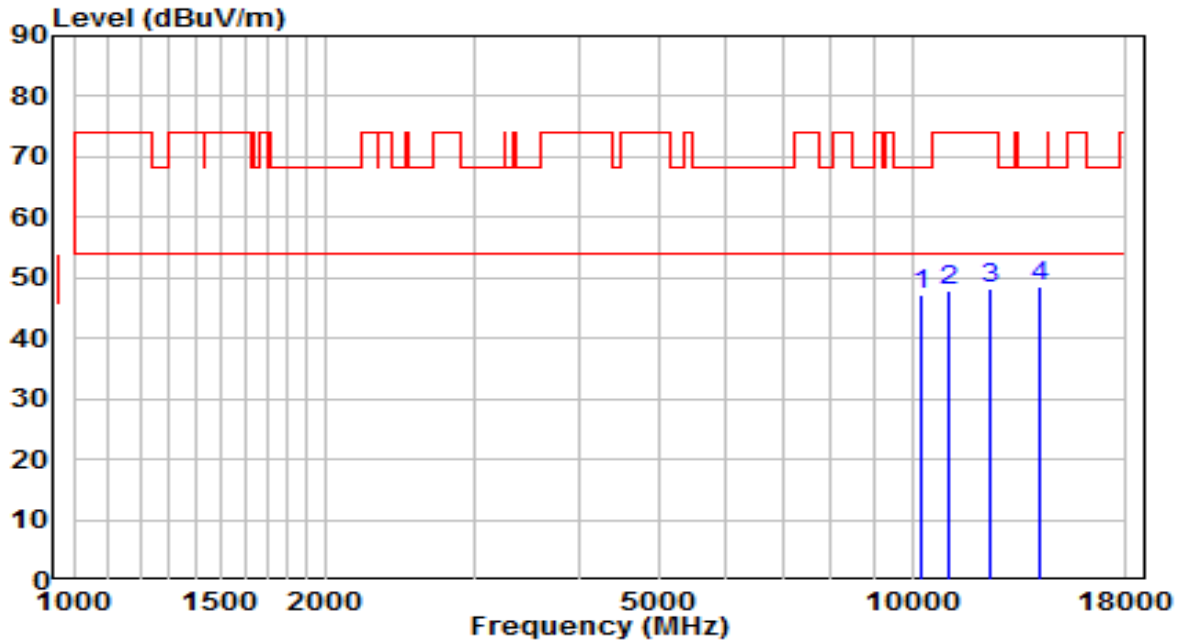


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10273.500	29.79	17.56	47.35	-20.85	68.20	Peak
2	11047.000	28.91	19.13	48.04	-25.96	74.00	Peak
3	12356.000	29.61	18.64	48.25	-25.75	74.00	Peak
4	* 14192.000	25.89	22.70	48.59	-19.61	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5500MHz	Test Voltage	120V/60Hz

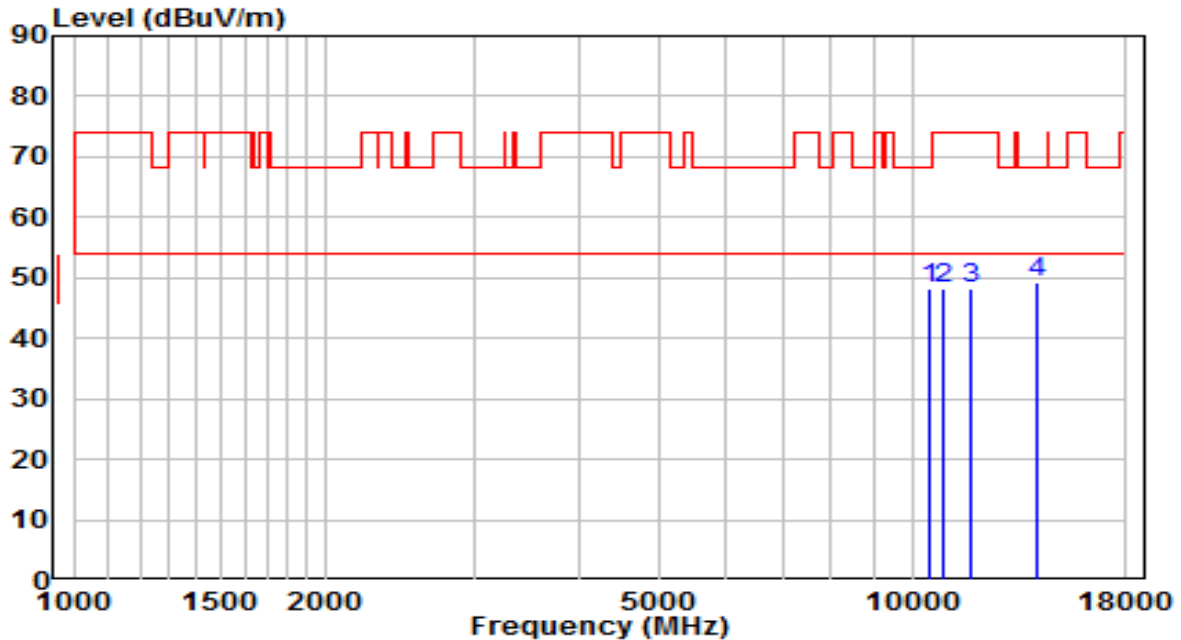


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10486.000	29.65	18.44	48.09	-20.11	68.20	Peak
2	10928.000	29.19	18.95	48.15	-25.85	74.00	Peak
3	11769.500	28.89	19.47	48.36	-25.64	74.00	Peak
4	* 14081.500	26.65	22.69	49.34	-18.86	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5500MHz	Test Voltage	120V/60Hz

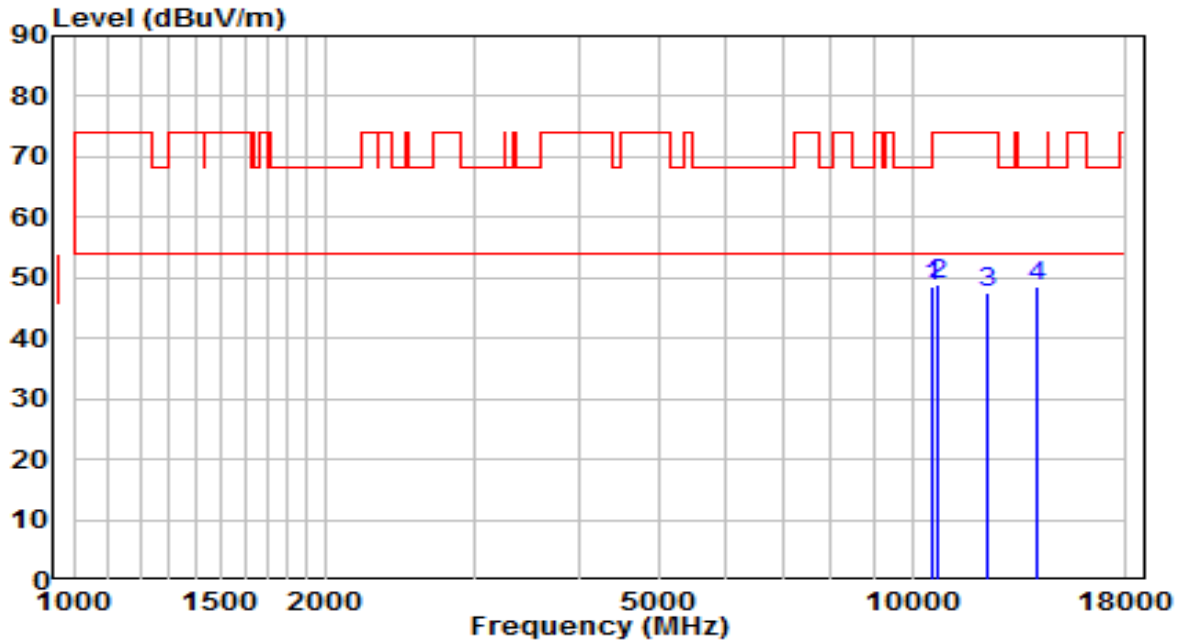


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	*	30.12	18.59	48.71	-19.49	68.20	Peak
2		30.30	18.74	49.04	-24.96	74.00	Peak
3		29.00	18.69	47.69	-26.31	74.00	Peak
4		25.90	22.69	48.58	-19.62	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5580MHz	Test Voltage	120V/60Hz

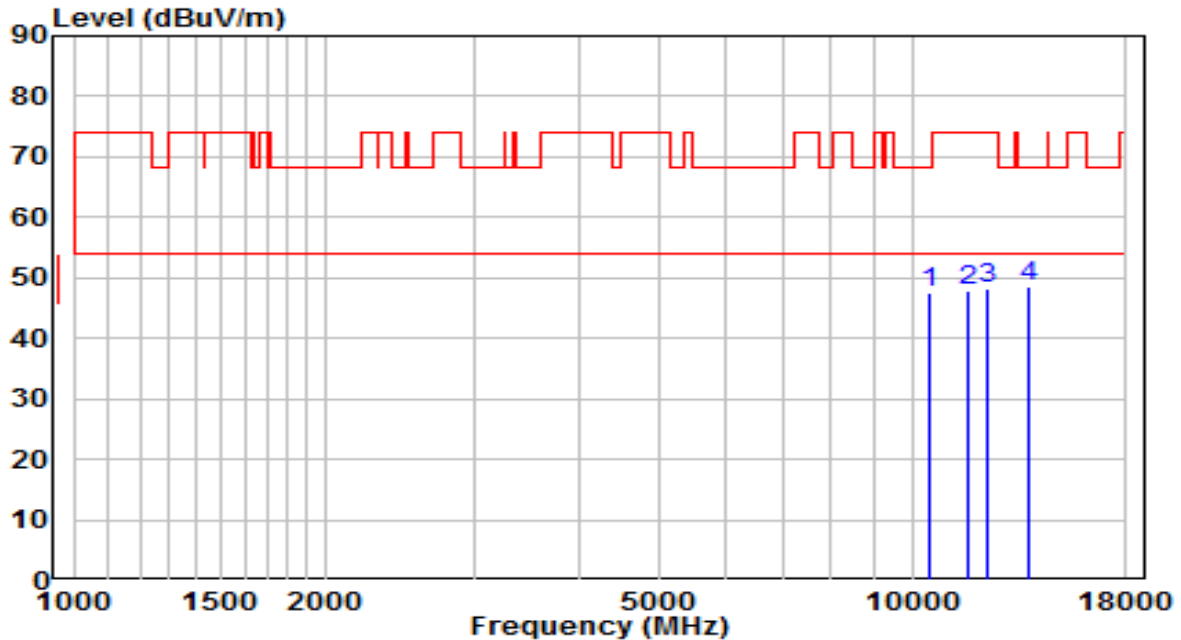


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10511.500	29.14	18.51	47.66	-20.54	68.20	Peak
2	11633.500	28.15	19.76	47.91	-26.09	74.00	Peak
3	12279.500	29.57	18.71	48.28	-25.72	74.00	Peak
4	* 13767.000	25.99	22.44	48.43	-19.77	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5580MHz	Test Voltage	120V/60Hz

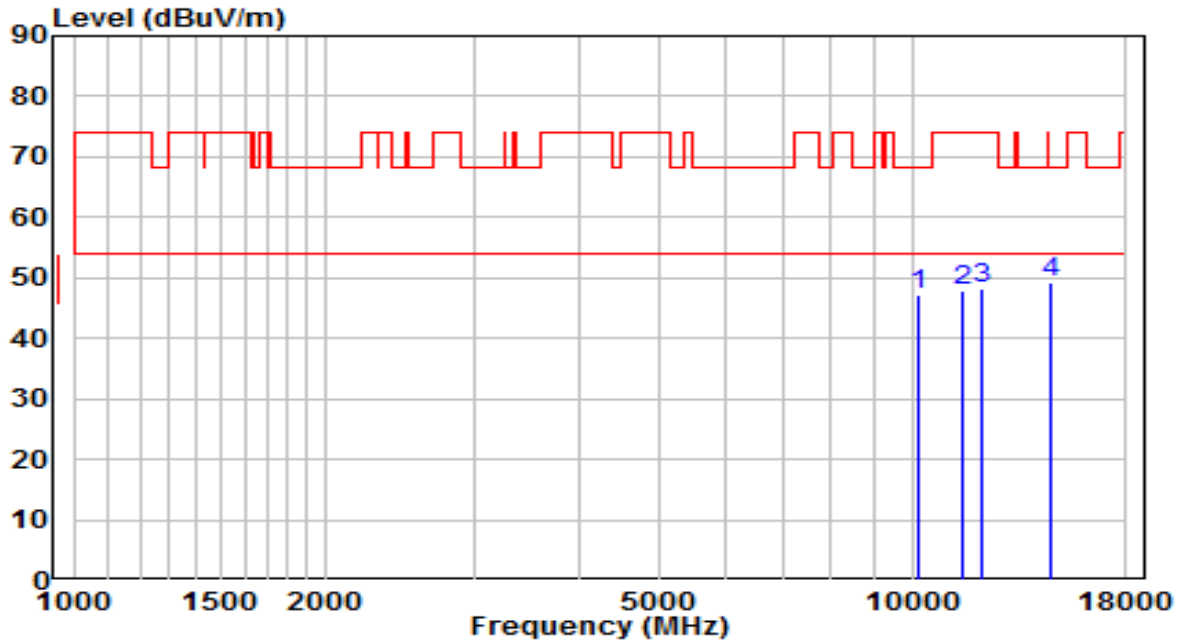


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10180.000	30.14	17.17	47.31	-20.89	68.20	Peak
2	11489.000	27.69	20.03	47.72	-26.28	74.00	Peak
3	12075.500	29.44	18.90	48.34	-25.66	74.00	Peak
4	* 14625.500	26.69	22.61	49.30	-18.90	68.20	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
- Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5700MHz	Test Voltage	120V/60Hz

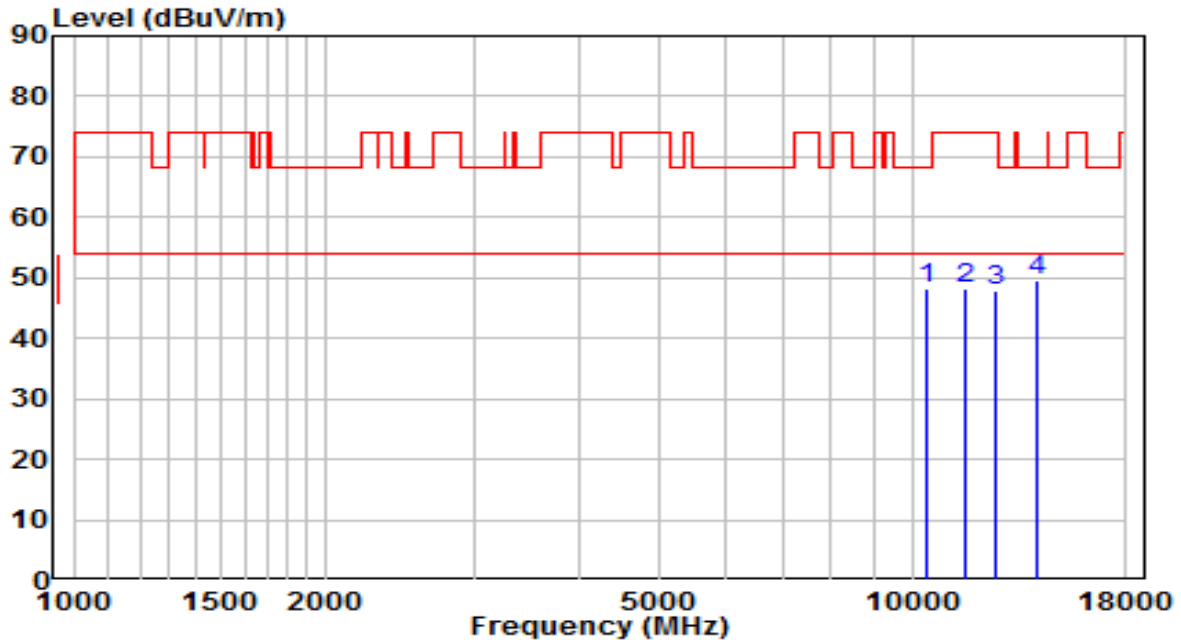


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10392.500	30.06	18.05	48.11	-20.09	68.20	Peak
2	11582.500	28.26	19.87	48.13	-25.87	74.00	Peak
3	12594.000	29.03	18.80	47.84	-26.16	74.00	Peak
4	* 14064.500	26.90	22.69	49.59	-18.61	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5700MHz	Test Voltage	120V/60Hz

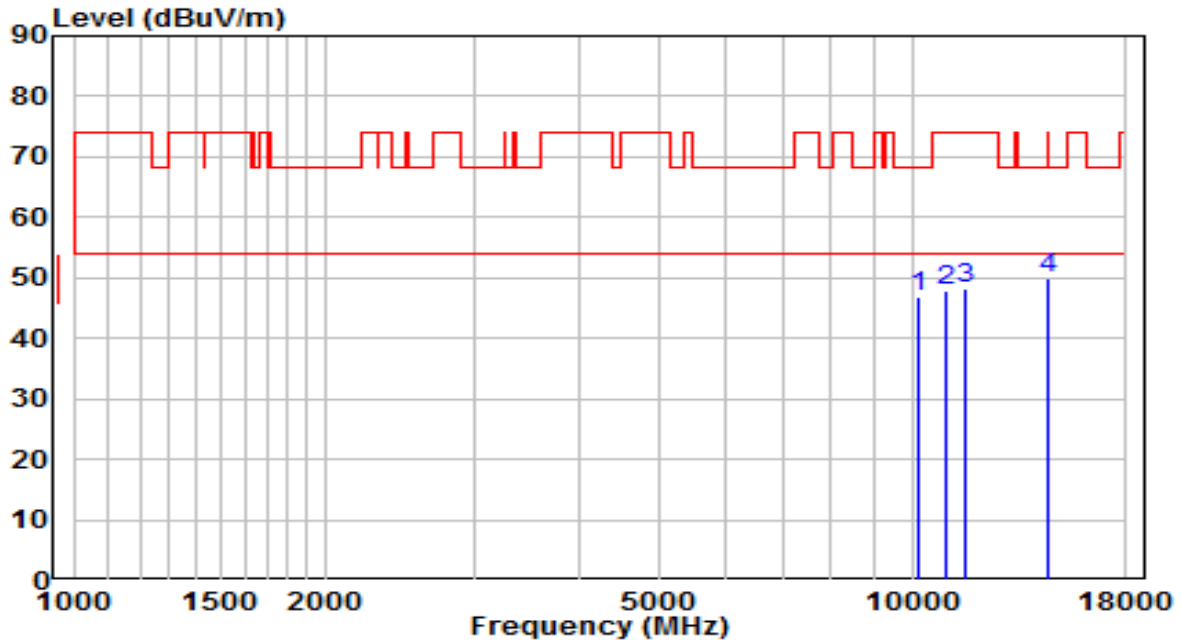


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10146.000	29.87	17.03	46.90	-21.30	68.20	Peak
2	10987.500	28.88	19.02	47.90	-26.10	74.00	Peak
3	11591.000	28.47	19.85	48.32	-25.68	74.00	Peak
4	* 14515.000	27.13	22.71	49.85	-18.35	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5720MHz	Test Voltage	120V/60Hz

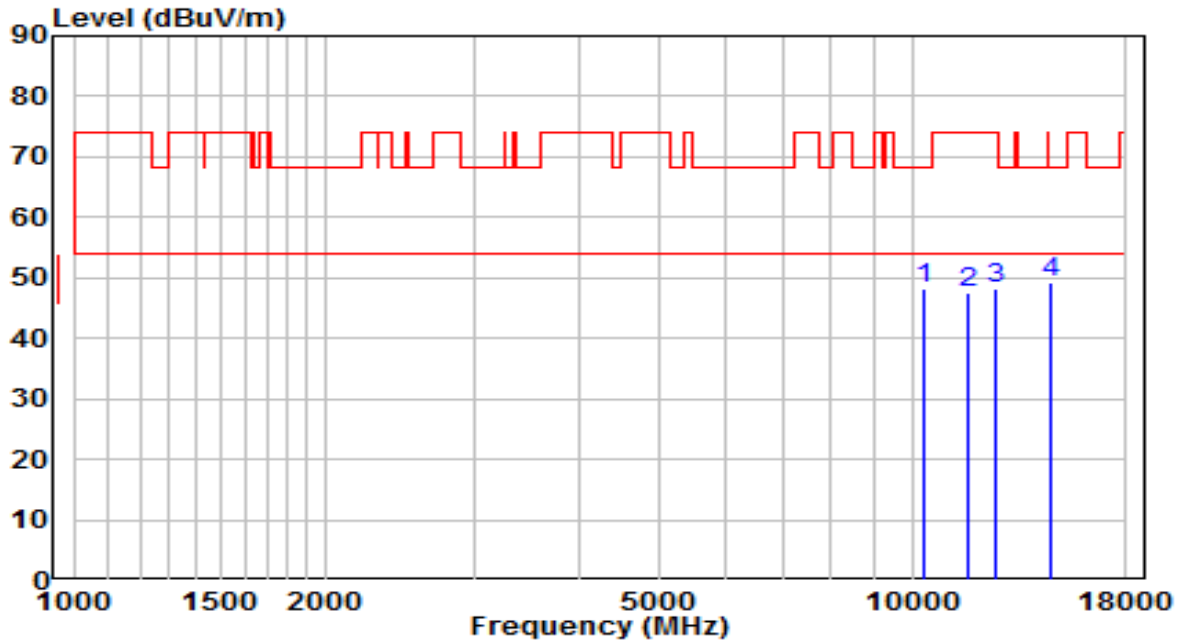


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10350.000	30.32	17.88	48.19	-20.01	68.20	Peak
2	11684.500	27.86	19.65	47.51	-26.49	74.00	Peak
3	12568.500	29.46	18.72	48.18	-25.82	74.00	Peak
4	* 14608.500	26.53	22.62	49.15	-19.05	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5720MHz	Test Voltage	120V/60Hz

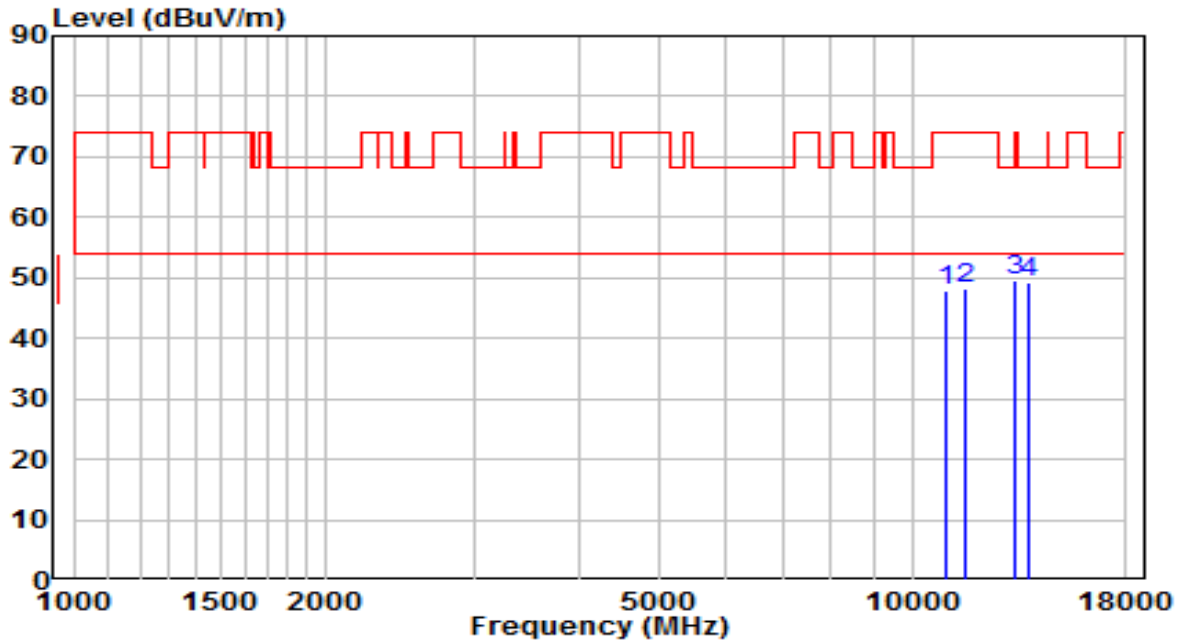


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10936.500	28.95	18.96	47.92	-26.08	74.00	Peak
2	11599.500	28.49	19.84	48.33	-25.67	74.00	Peak
3	* 13214.500	28.64	20.98	49.62	-18.58	68.20	Peak
4	13733.000	26.86	22.40	49.27	-18.93	68.20	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
- Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5745MHz	Test Voltage	120V/60Hz

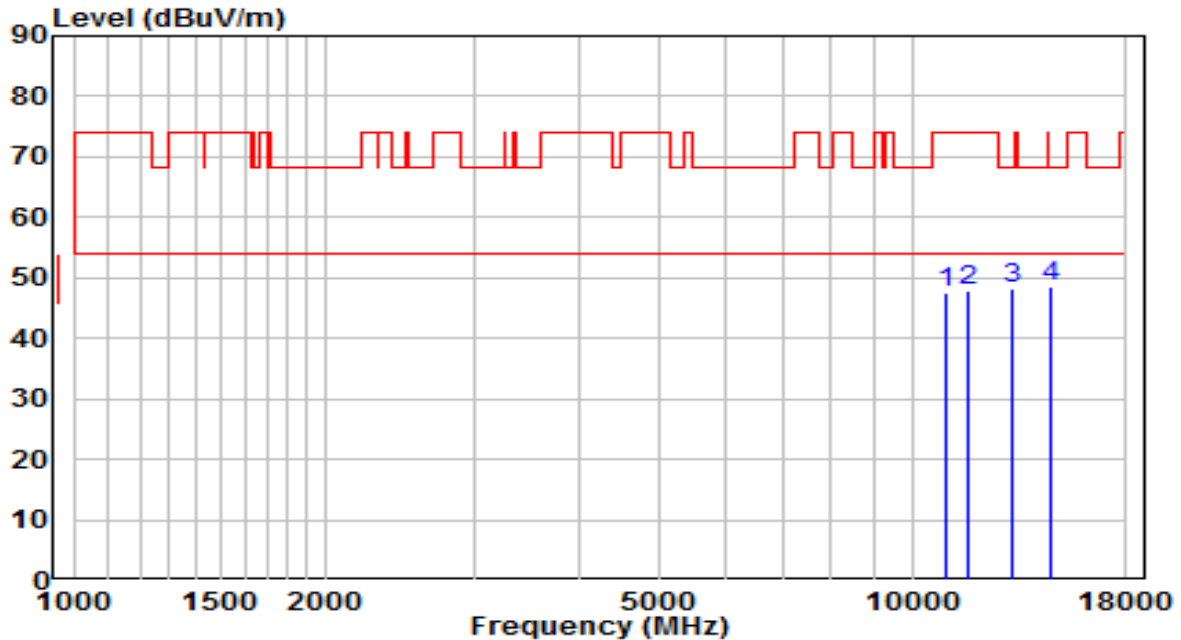


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10970.500	28.45	19.00	47.44	-26.56	74.00	Peak
2	11676.000	28.36	19.67	48.03	-25.97	74.00	Peak
3	13121.000	27.74	20.59	48.33	-19.87	68.20	Peak
4	* 14659.500	26.09	22.58	48.67	-19.53	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5745MHz	Test Voltage	120V/60Hz

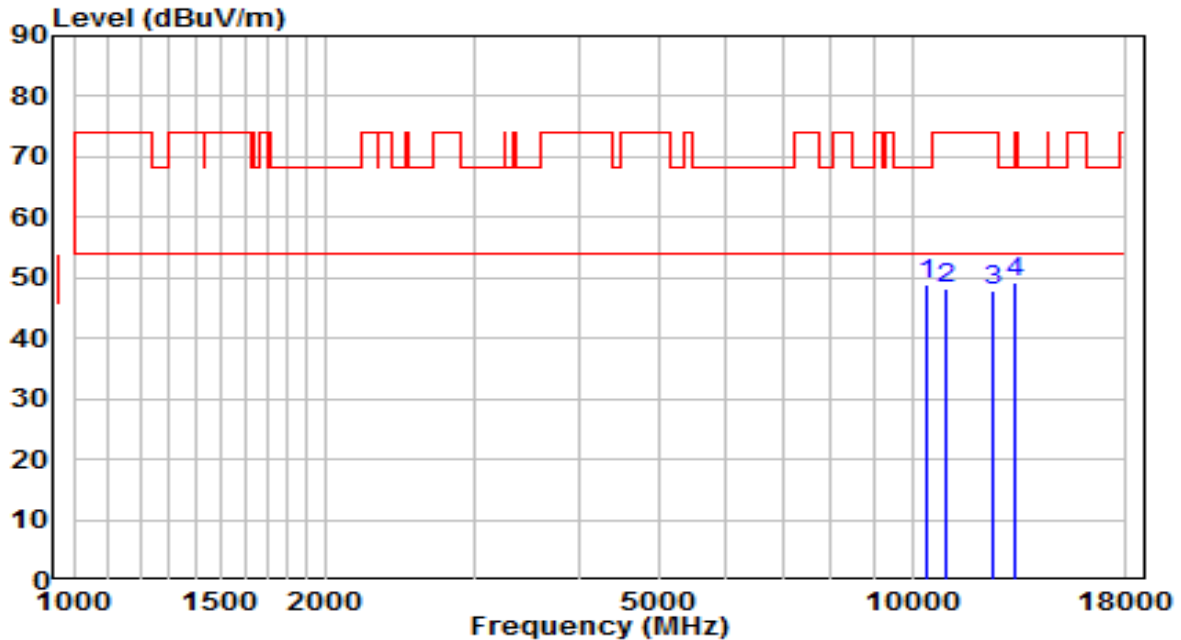


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10384.000	30.87	18.02	48.89	-19.31	68.20	Peak
2	10987.500	29.05	19.02	48.07	-25.93	74.00	Peak
3	12466.500	29.49	18.54	48.02	-25.98	74.00	Peak
4	* 13214.500	28.39	20.98	49.37	-18.83	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5785MHz	Test Voltage	120V/60Hz

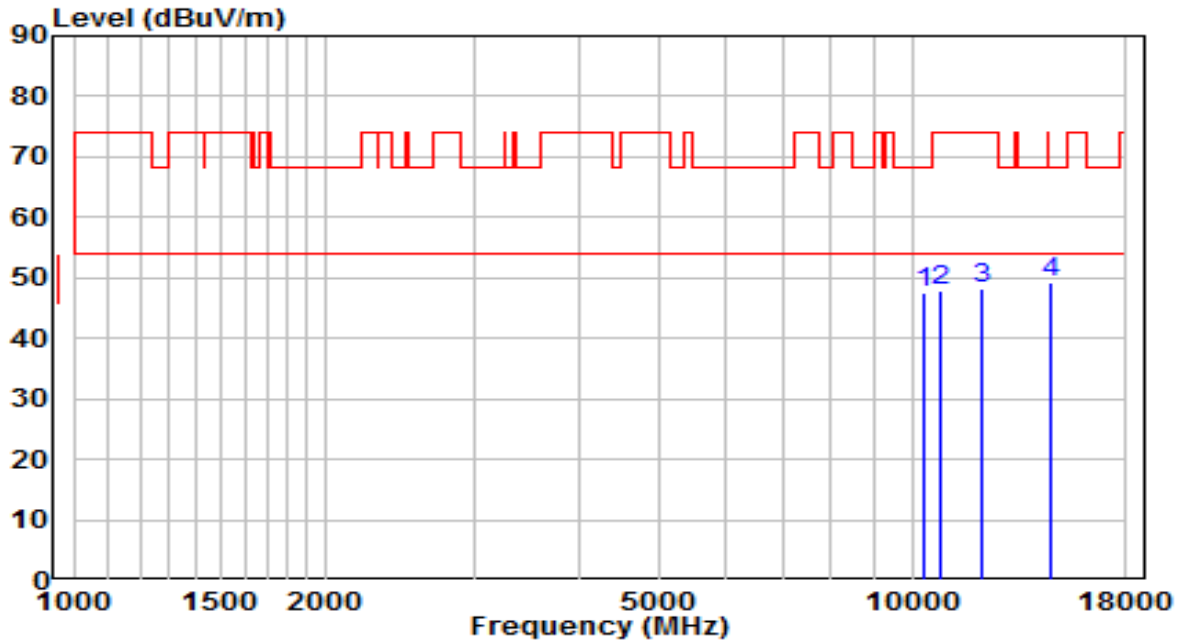


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10350.000	29.63	17.88	47.51	-20.69	68.20	Peak
2	10843.000	28.99	18.86	47.85	-26.15	74.00	Peak
3	12126.500	29.36	18.85	48.22	-25.78	74.00	Peak
4	* 14583.000	26.61	22.65	49.26	-18.94	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5785MHz	Test Voltage	120V/60Hz

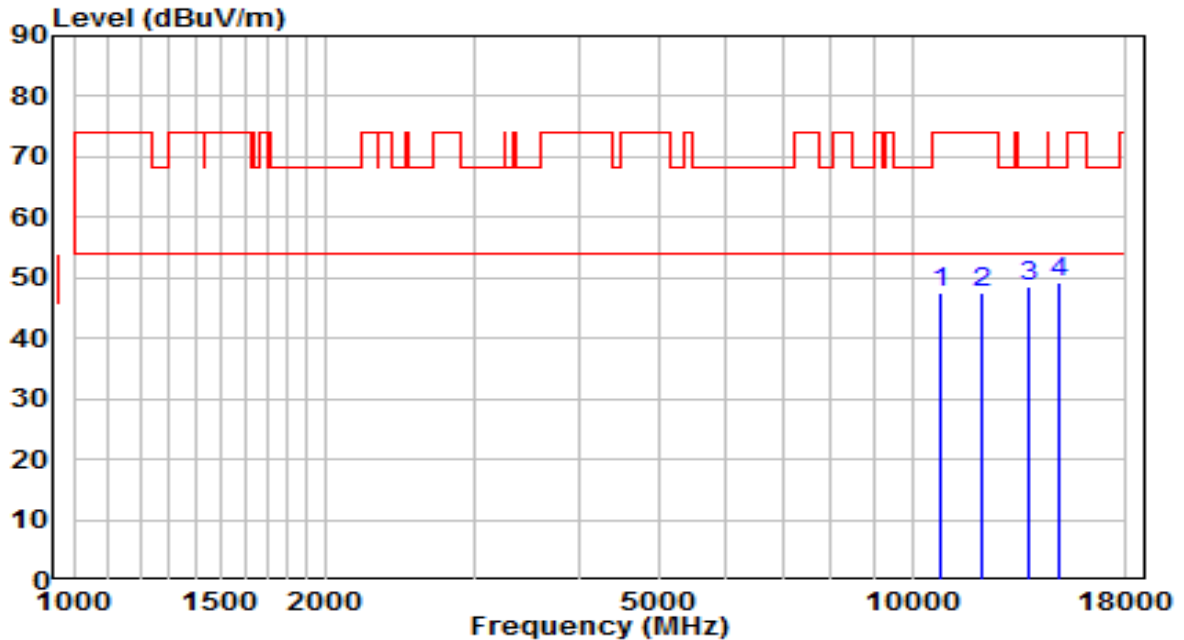


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10826.000	28.68	18.85	47.53	-26.47	74.00	Peak
2	12101.000	28.73	18.88	47.61	-26.39	74.00	Peak
3	13818.000	26.10	22.49	48.60	-19.60	68.20	Peak
4	* 14923.000	26.84	22.33	49.17	-19.03	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5825MHz	Test Voltage	120V/60Hz

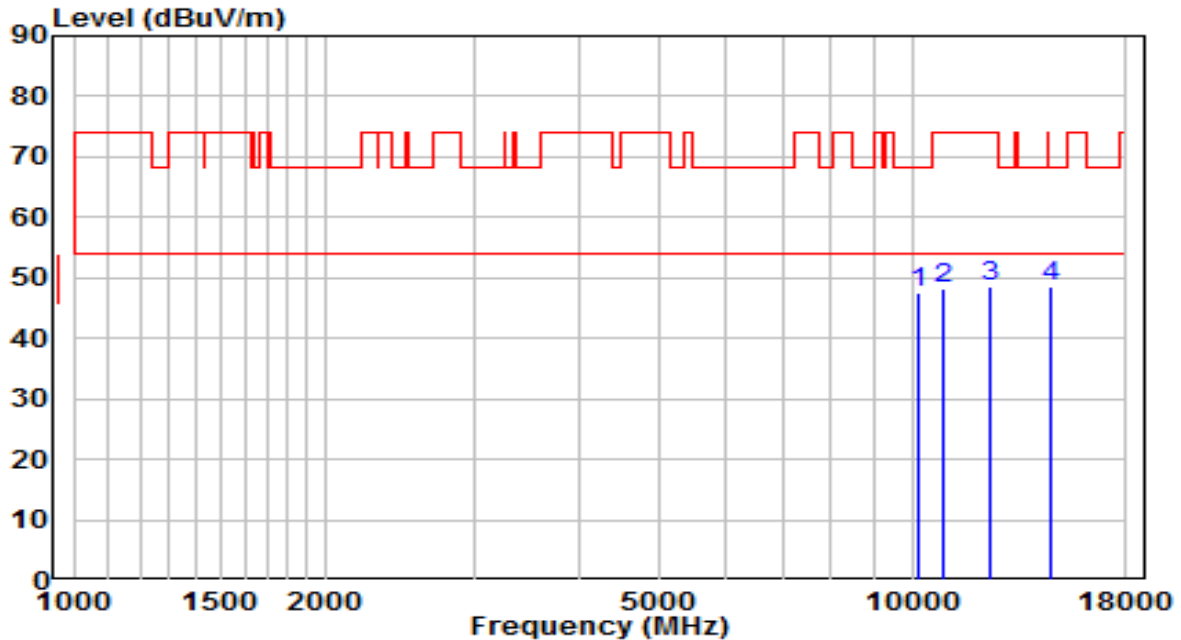


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10154.500	30.38	17.06	47.44	-20.76	68.20	Peak
2	10885.500	29.36	18.91	48.27	-25.73	74.00	Peak
3	12398.500	29.82	18.60	48.42	-25.58	74.00	Peak
4	* 14651.000	26.05	22.58	48.64	-19.56	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11a at 5825MHz	Test Voltage	120V/60Hz

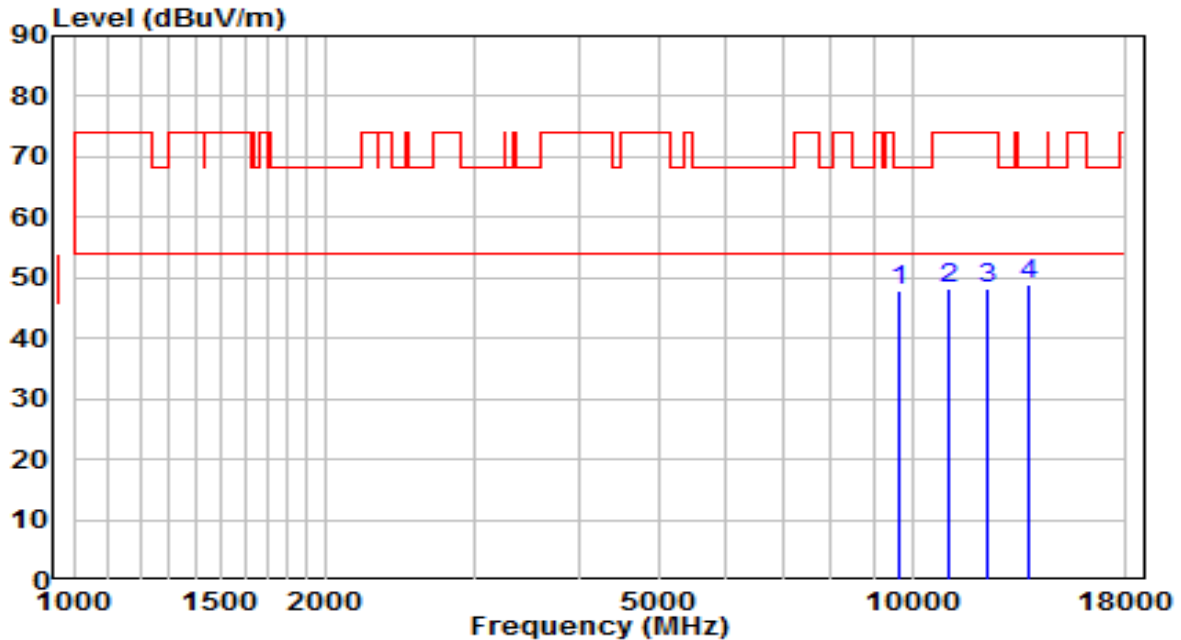


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	9636.000	32.23	15.74	47.97	-20.23	68.20	Peak
2	11047.000	29.03	19.13	48.16	-25.84	74.00	Peak
3	12296.500	29.51	18.69	48.20	-25.80	74.00	Peak
4	* 13784.000	26.32	22.46	48.78	-19.42	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz	Test Voltage	120V/60Hz

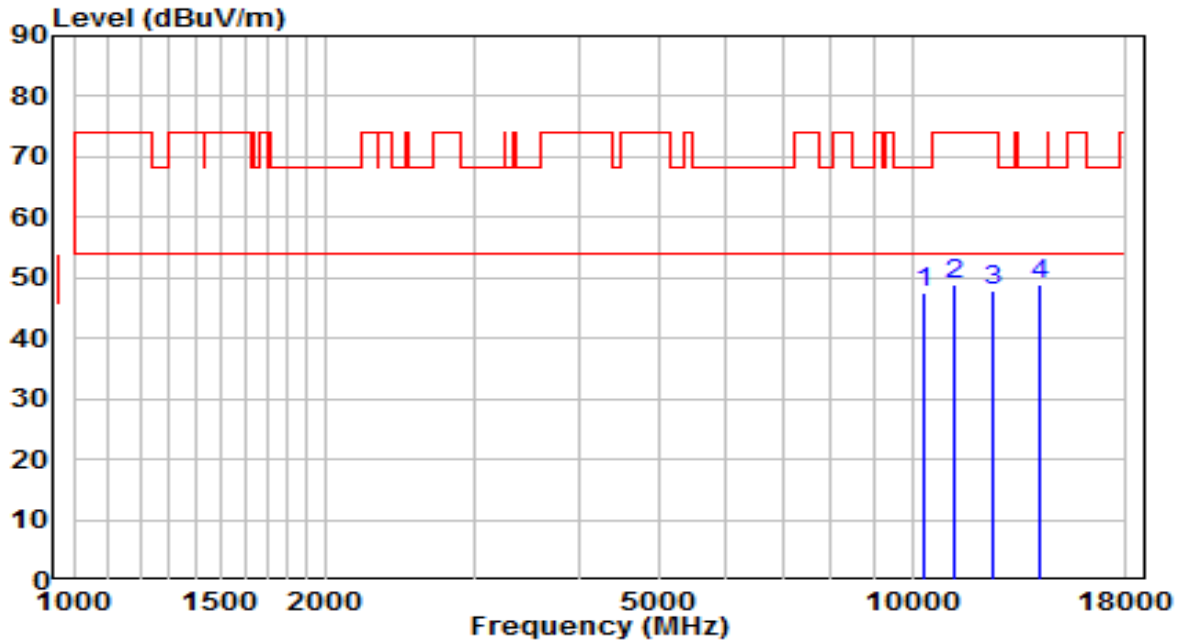


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10350.000	29.70	17.88	47.58	-20.62	68.20	Peak
2	11242.500	29.25	19.52	48.78	-25.22	74.00	Peak
3	12517.500	29.36	18.56	47.92	-26.08	74.00	Peak
4	* 14209.000	26.18	22.70	48.87	-19.33	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz	Test Voltage	120V/60Hz

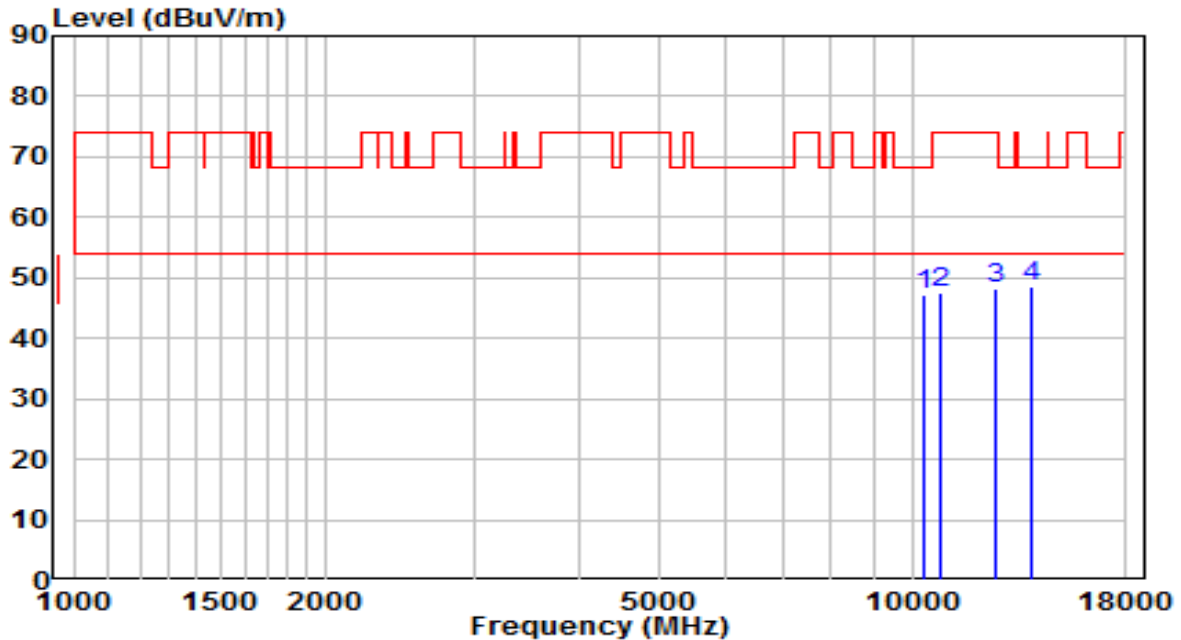


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	10341.500	29.44	17.84	47.28	-20.92	68.20	Peak
2	10783.500	28.87	18.80	47.67	-26.33	74.00	Peak
3	12534.500	29.62	18.61	48.23	-25.77	74.00	Peak
4	* 13835.000	26.00	22.51	48.51	-19.69	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at 5220MHz	Test Voltage	120V/60Hz

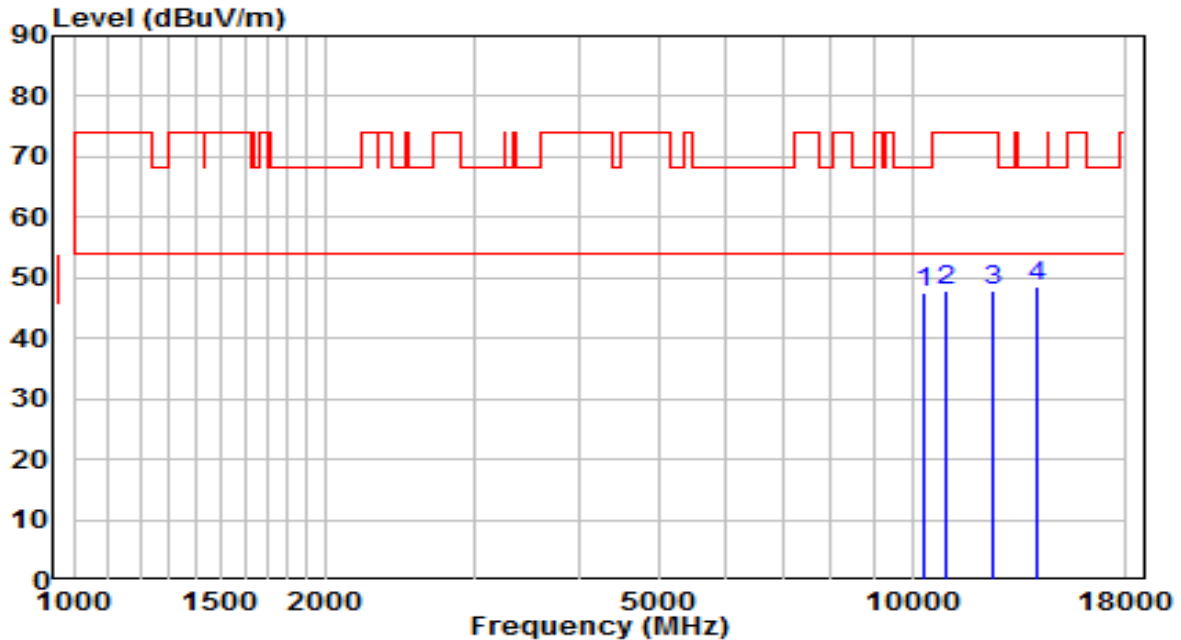


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	10299.000	30.00	17.66	47.66	-20.54	68.20	Peak
2	10987.500	28.79	19.02	47.80	-26.20	74.00	Peak
3	12458.000	29.49	18.54	48.03	-25.97	74.00	Peak
4	* 14141.000	26.03	22.69	48.73	-19.47	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at 5220MHz	Test Voltage	120V/60Hz

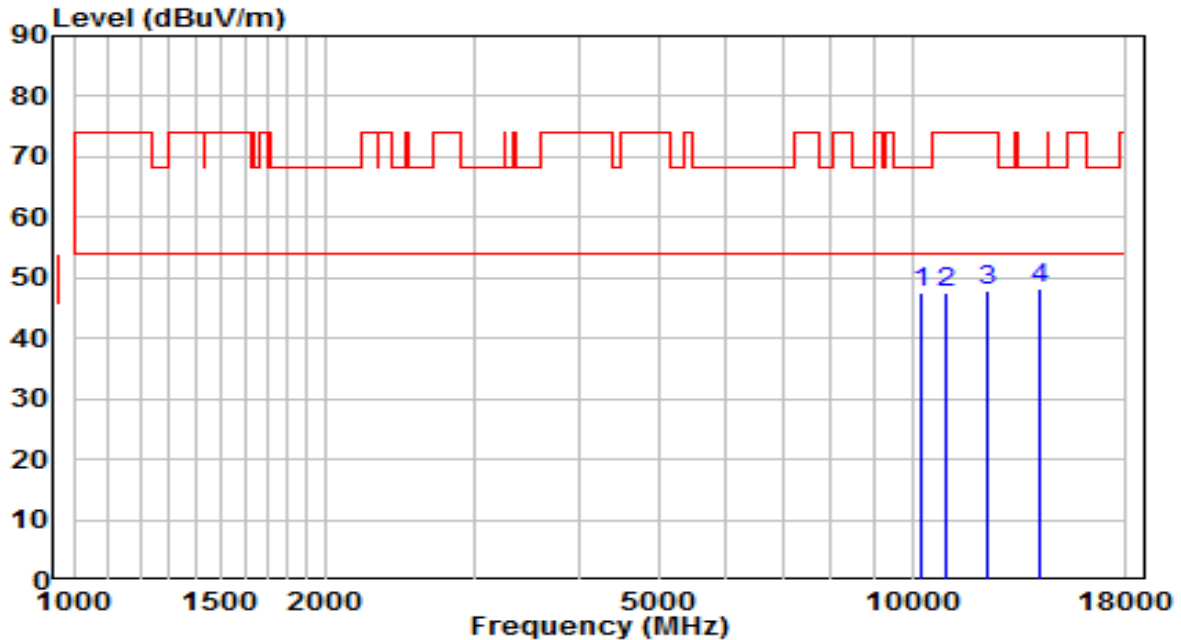


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	10265.000	30.04	17.52	47.57	-20.63	68.20	Peak
2	10979.000	28.60	19.01	47.61	-26.39	74.00	Peak
3	12271.000	29.00	18.72	47.72	-26.28	74.00	Peak
4	* 14226.000	25.50	22.70	48.20	-20.00	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at 5240MHz	Test Voltage	120V/60Hz

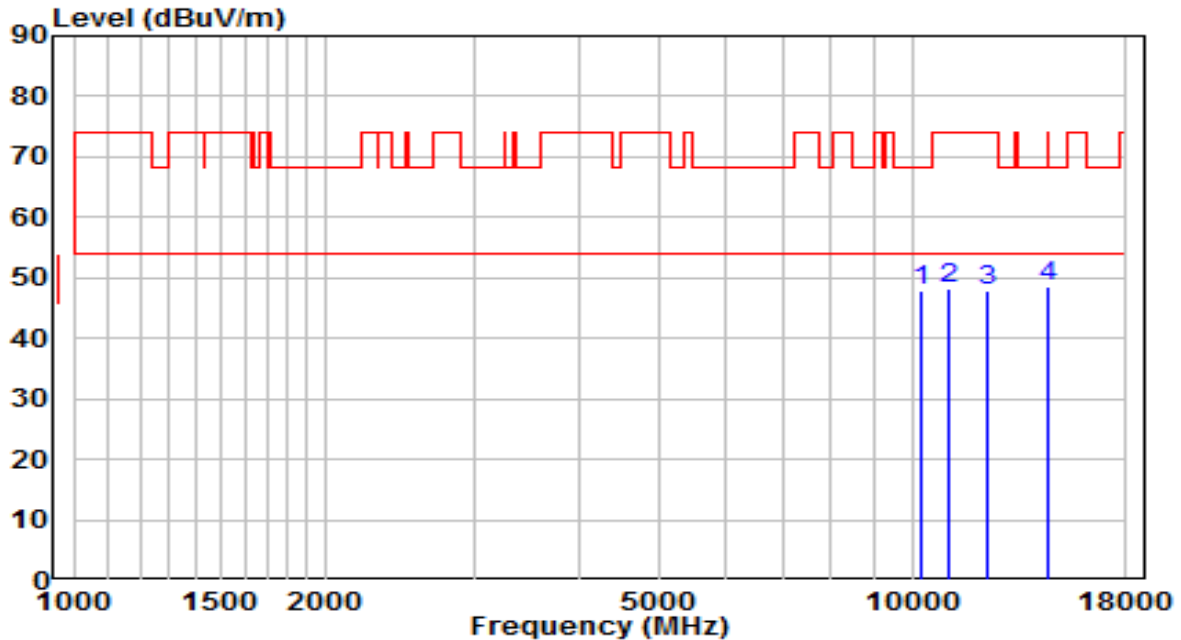


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10248.000	30.37	17.45	47.82	-20.38	68.20	Peak
2	11038.500	29.04	19.11	48.15	-25.85	74.00	Peak
3	12322.000	29.14	18.67	47.81	-26.19	74.00	Peak
4	* 14549.000	25.95	22.68	48.63	-19.57	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at 5240MHz	Test Voltage	120V/60Hz

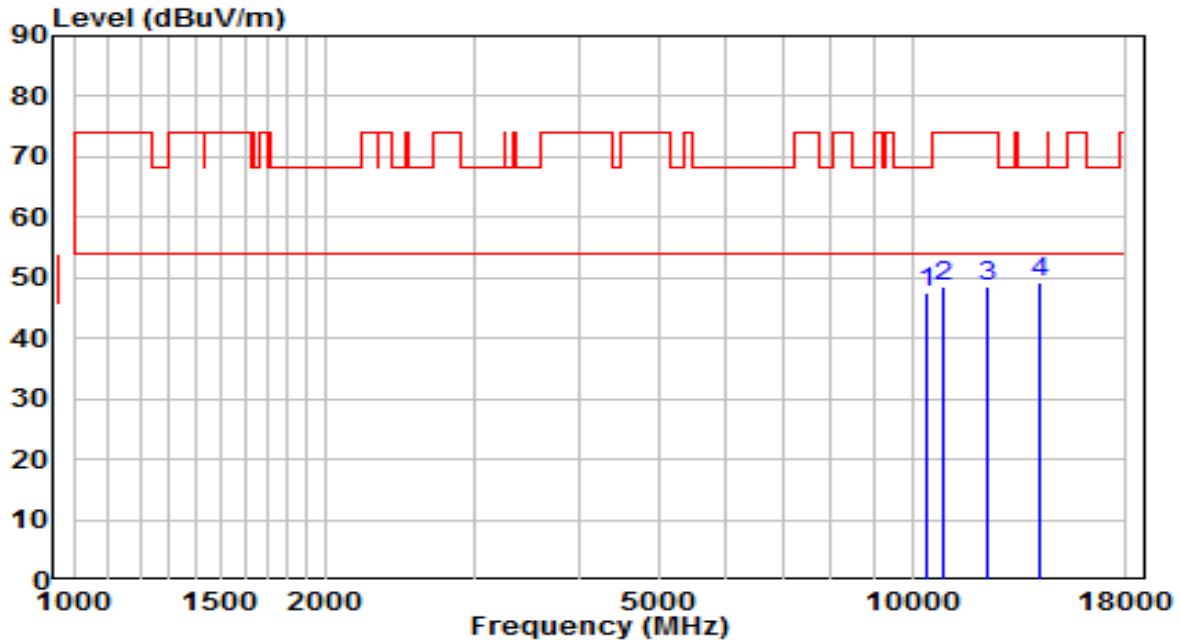


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10409.500	29.40	18.12	47.52	-20.68	68.20	Peak
2	10919.500	29.79	18.94	48.73	-25.27	74.00	Peak
3	12296.500	29.83	18.69	48.53	-25.47	74.00	Peak
4	* 14183.500	26.44	22.70	49.14	-19.06	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at 5260MHz	Test Voltage	120V/60Hz

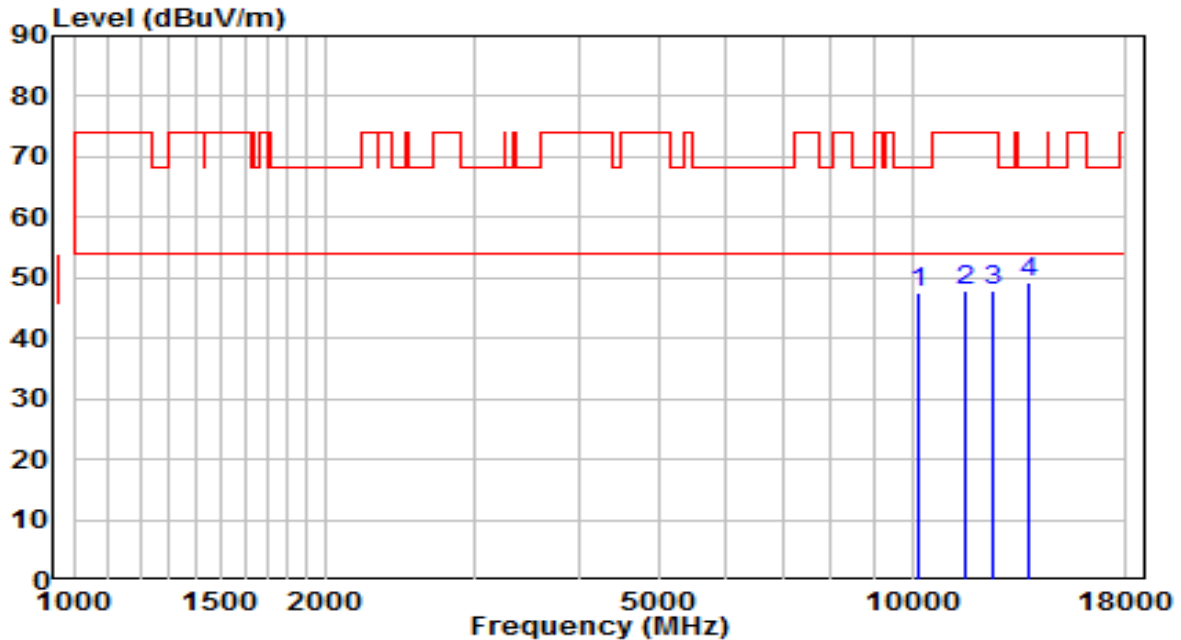


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	10163.000	30.34	17.10	47.44	-20.76	68.20	Peak
2	11591.000	28.03	19.85	47.88	-26.12	74.00	Peak
3	12475.000	29.45	18.53	47.98	-26.02	74.00	Peak
4	* 13741.500	26.91	22.41	49.32	-18.88	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at 5260MHz	Test Voltage	120V/60Hz

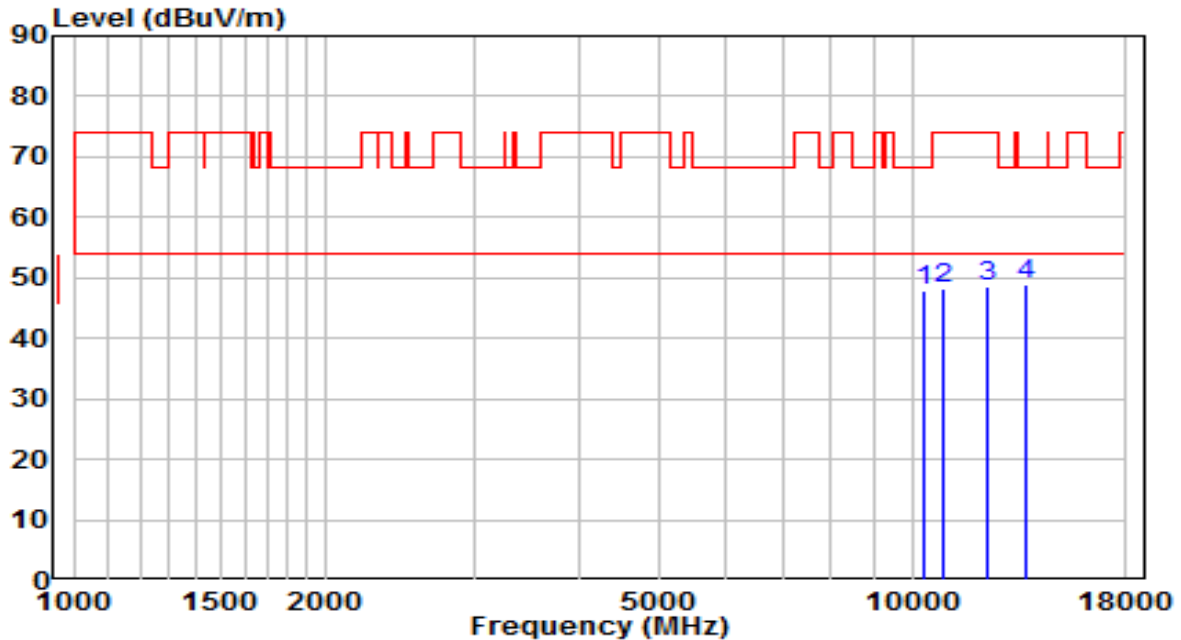


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10307.500	30.33	17.70	48.03	-20.17	68.20	Peak
2	10877.000	29.38	18.90	48.28	-25.72	74.00	Peak
3	12271.000	29.73	18.72	48.45	-25.55	74.00	Peak
4	* 13707.500	26.42	22.38	48.80	-19.40	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at 5300MHz	Test Voltage	120V/60Hz

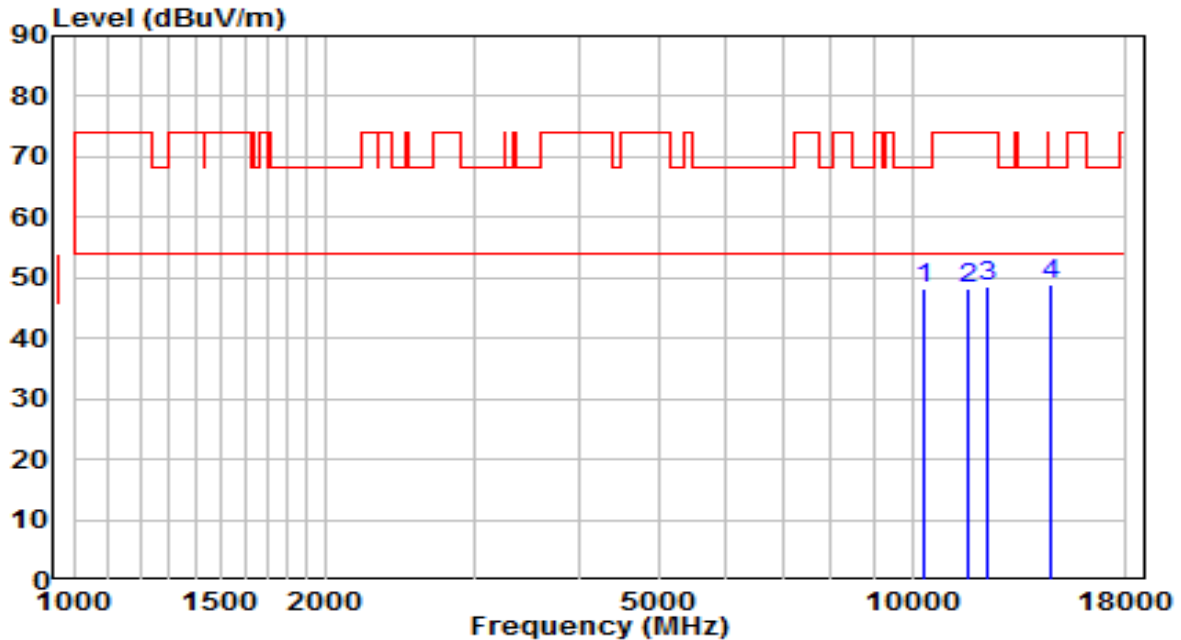


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	10341.500	30.50	17.84	48.34	-19.86	68.20	Peak
2	11642.000	28.35	19.74	48.10	-25.90	74.00	Peak
3	12305.000	29.98	18.69	48.66	-25.34	74.00	Peak
4	* 14651.000	26.25	22.58	48.84	-19.36	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at 5300MHz	Test Voltage	120V/60Hz

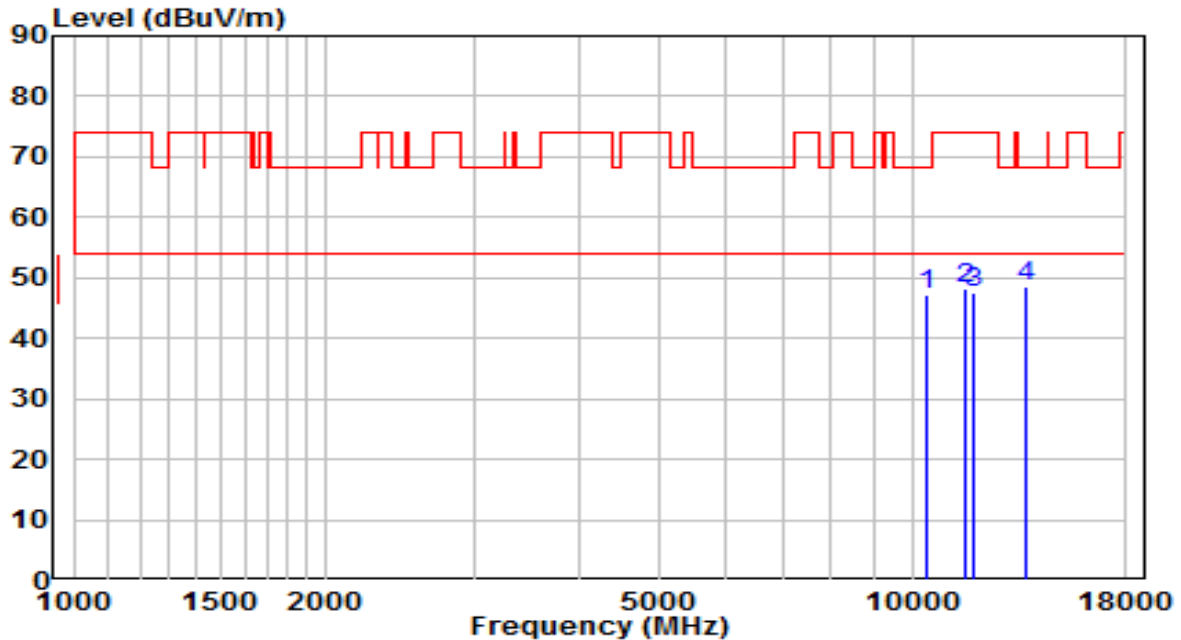


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	10418.000	29.17	18.16	47.33	-20.87	68.20	Peak
2	11548.500	28.18	19.95	48.12	-25.88	74.00	Peak
3	11863.000	28.34	19.27	47.60	-26.40	74.00	Peak
4	* 13716.000	26.29	22.39	48.68	-19.52	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz	Test Voltage	120V/60Hz

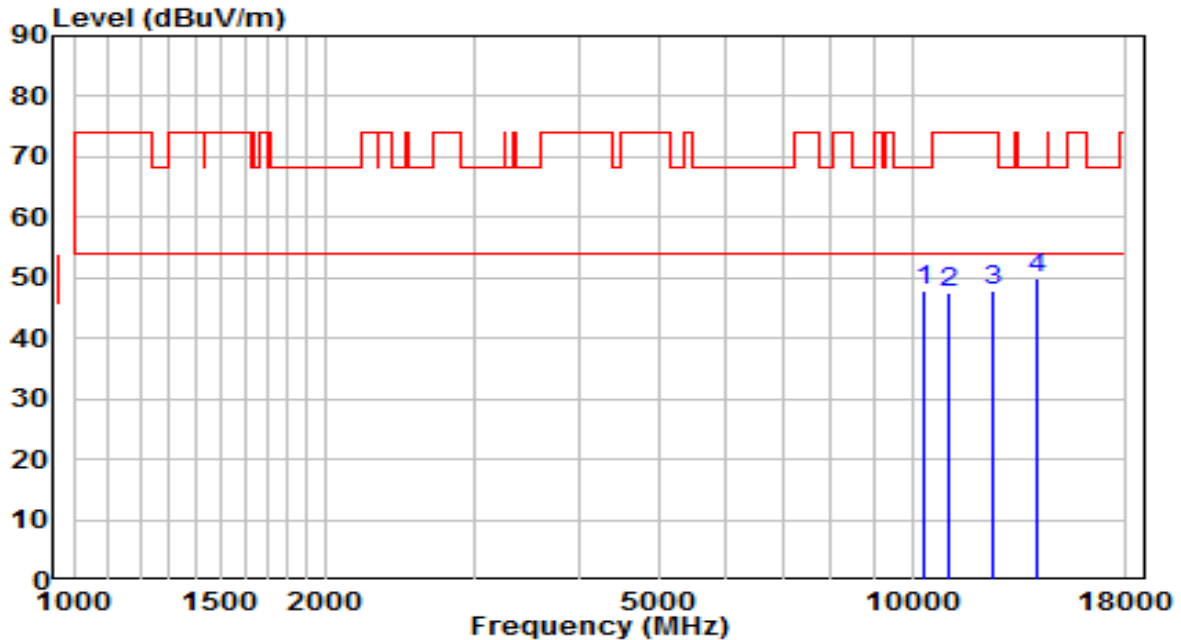


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10341.500	30.19	17.84	48.03	-20.17	68.20	Peak
2	11089.500	28.39	19.21	47.60	-26.40	74.00	Peak
3	12441.000	29.21	18.56	47.77	-26.23	74.00	Peak
4	* 14098.500	27.18	22.69	49.87	-18.33	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz	Test Voltage	120V/60Hz

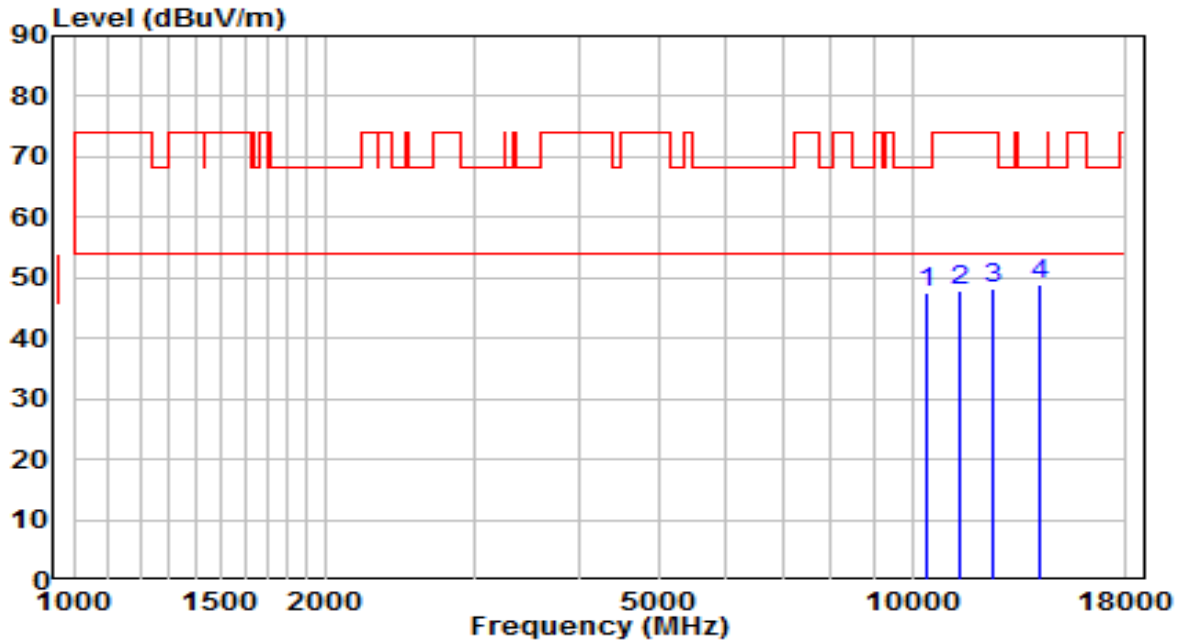


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	10401.000	29.36	18.09	47.45	-20.75	68.20	Peak
2	11438.000	27.85	19.92	47.77	-26.23	74.00	Peak
3	12458.000	29.55	18.54	48.10	-25.90	74.00	Peak
4	* 14217.500	26.12	22.70	48.82	-19.38	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz	Test Voltage	120V/60Hz

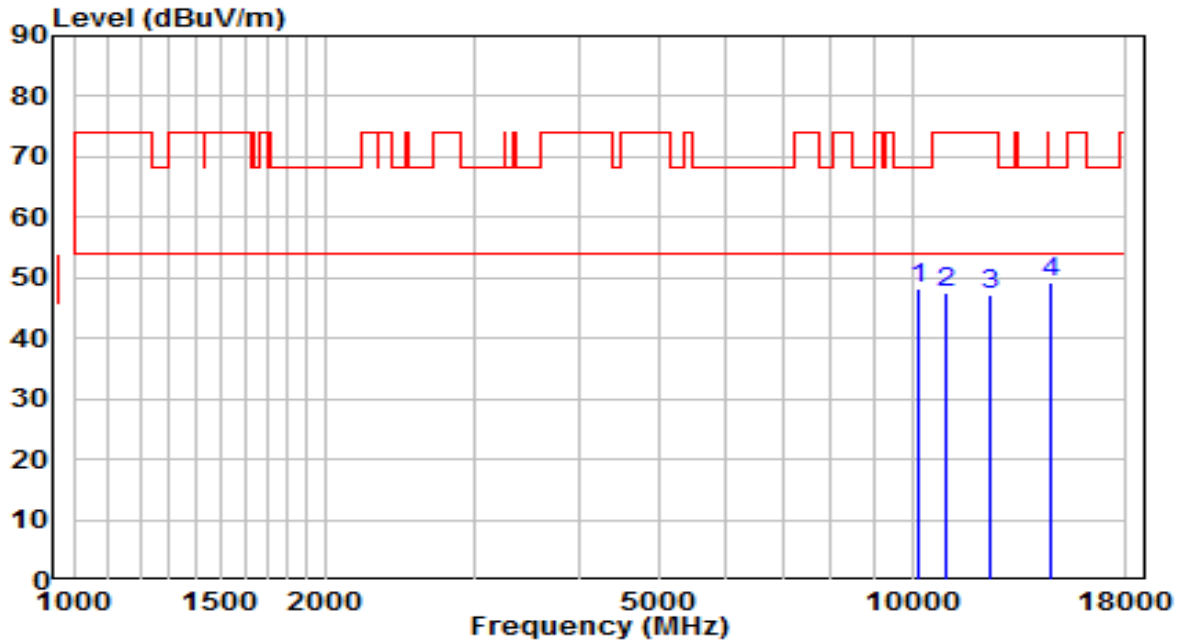


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10146.000	31.32	17.03	48.35	-19.85	68.20	Peak
2	10996.000	28.44	19.03	47.46	-26.54	74.00	Peak
3	12432.500	28.77	18.57	47.34	-26.66	74.00	Peak
4	* 14591.500	26.77	22.64	49.41	-18.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz	Test Voltage	120V/60Hz

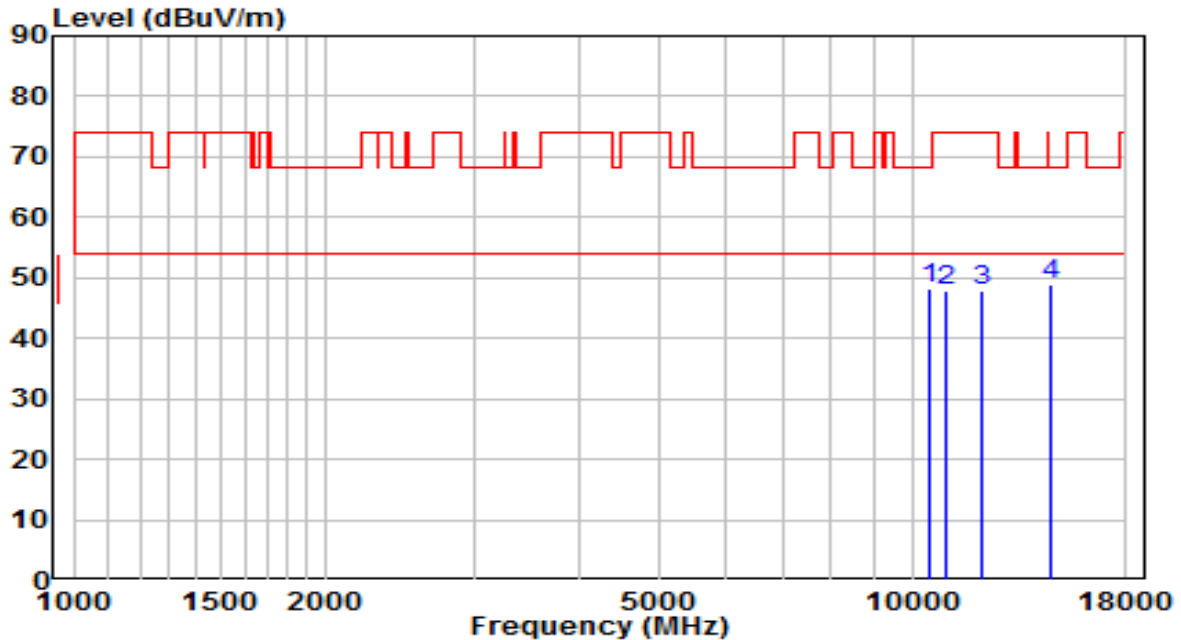


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10511.500	29.71	18.51	48.22	-19.98	68.20	Peak
2	10936.500	29.08	18.96	48.05	-25.95	74.00	Peak
3	12084.000	29.02	18.89	47.91	-26.09	74.00	Peak
4	* 14583.000	26.32	22.65	48.96	-19.24	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at 5580MHz	Test Voltage	120V/60Hz

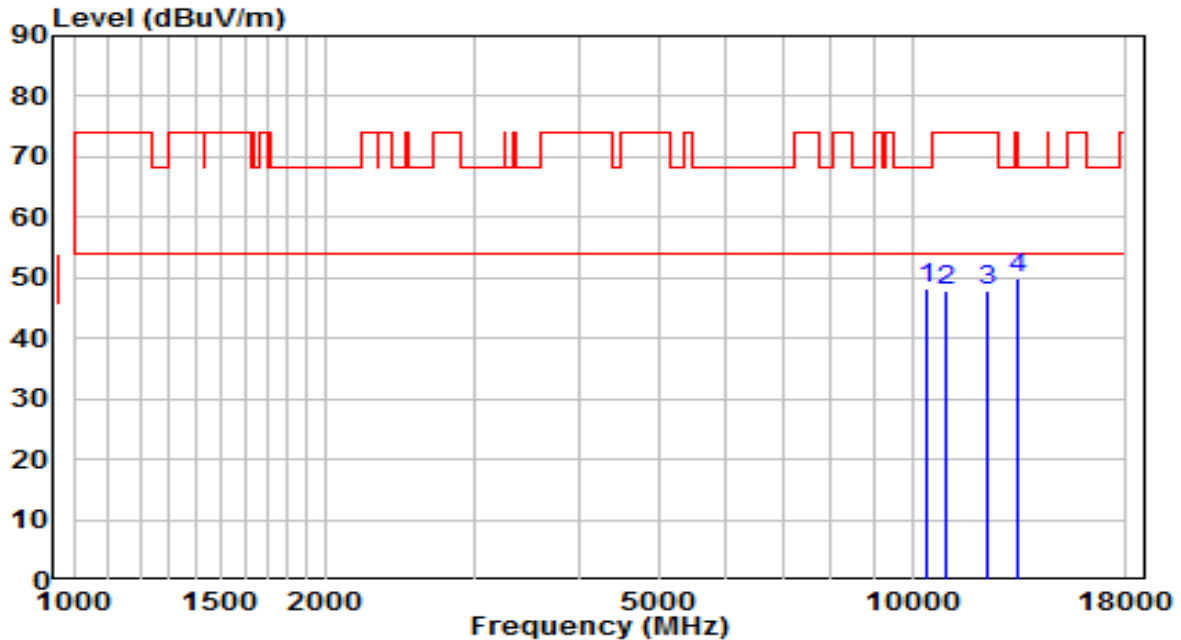


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Remark (QP/PK/AV)
1	10435.000	30.01	18.23	48.24	-19.96	68.20	Peak
2	10987.500	28.88	19.02	47.90	-26.10	74.00	Peak
3	12313.500	29.27	18.68	47.95	-26.05	74.00	Peak
4	* 13401.500	28.05	21.76	49.80	-18.40	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.

EUT	ACCESS POINT	Date of Test	2022-09-06
Factor	BBHA 9120D (1GHz~18GHz)_2022	Temp. / Humidity	25.1°C/48.8%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay Chu
Test Mode	Transmit by 802.11ac-VHT20 at 5580MHz	Test Voltage	120V/60Hz

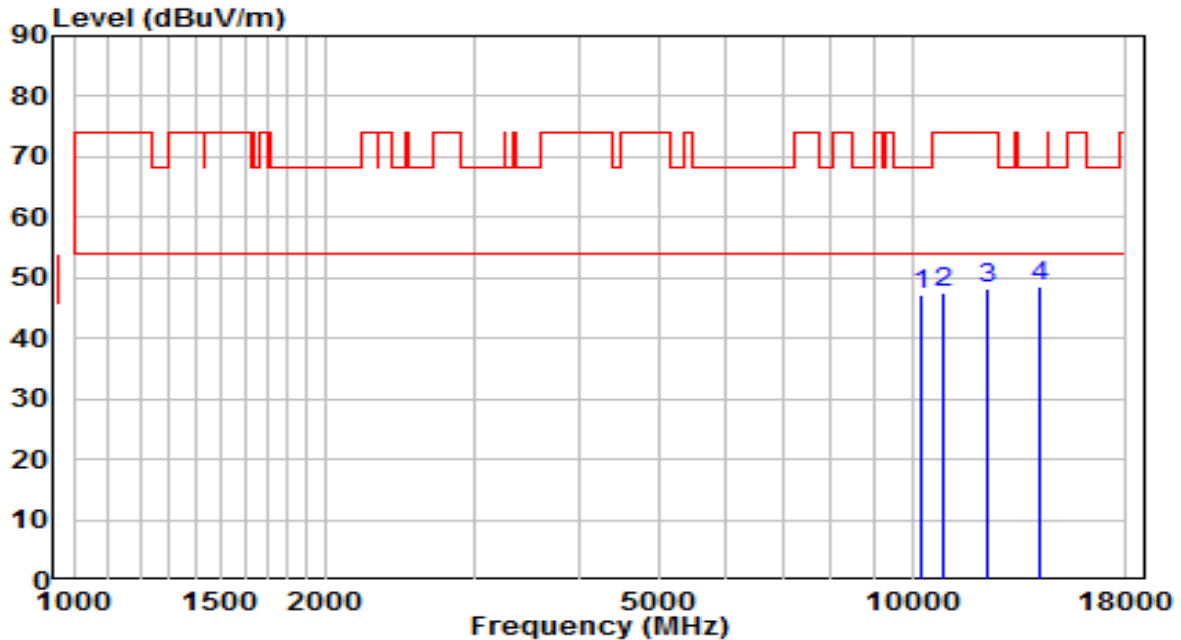

No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	10256.500	29.61	17.49	47.09	-21.11	68.20	Peak
2	10894.000	28.75	18.92	47.67	-26.33	74.00	Peak
3	12296.500	29.51	18.69	48.20	-25.80	74.00	Peak
4	* 14226.000	25.87	22.70	48.57	-19.63	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. Average measurements were not performed when peak levels lower than the average limits.