



RF MEASUREMENT REPORT

FCC ID: Q9DAPINR605

Applicant: Hewlett Packard Enterprise Company

Product: ACCESS POINT

Model No.: APINR605

Trademark:  

FCC Classification: Unlicensed National Information Infrastructure (NII)

FCC Rule Part(s): Part 15 Subpart E (Section 15.407)

Result: Complies

Received Date: 2022-09-30

Test Date: 2022-10-30 ~ 2023-03-21

Reviewed By:

Jame Yuan

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB789033 and KDB 291074. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2209RSU069-U5	Rev. 01	Draft Report	2023-03-21	

CONTENTS

Description	Page
1. General Information	6
1.1. Applicant	6
1.2. Manufacturer	6
1.3. Testing Facility	6
1.4. Product Information.....	7
1.5. Radio Specification under Test	8
1.6. Working Frequencies	9
1.7. Antenna Details.....	9
1.8. Description of Operating Paths.....	10
2. Test Configuration	11
2.1. Test Mode.....	11
2.2. Test System Connection Diagram.....	11
2.3. Test Software	12
2.4. Applied Standards.....	12
2.5. Test Environment Condition	12
3. Antenna Requirements	13
4. Measuring Instrument	14
5. Decision Rules and Measurement Uncertainty	15
5.1. Decision Rules	15
5.2. Measurement Uncertainty.....	15
6. Test Result.....	16
6.1. Summary.....	16
6.2. 26dB & 99% Bandwidth Measurement.....	17
6.2.1. Test Limit.....	17
6.2.2. Test Procedure.....	17
6.2.3. Test Setting	17
6.2.4. Test Setup	17
6.2.5. Test Result	18
6.3. 6dB Bandwidth Measurement.....	19
6.3.1. Test Limit.....	19
6.3.2. Test Procedure.....	19
6.3.3. Test Setting	19
6.3.4. Test Setup	19
6.3.5. Test Result	19
6.4. Output Power Measurement.....	20

6.4.1.	Test Limit	20
6.4.2.	Test Procedure	20
6.4.3.	Test Setting	20
6.4.4.	Test Setup	20
6.4.5.	Test Result	20
6.5.	Power Spectral Density Measurement	21
6.5.1.	Test Limit	21
6.5.2.	Test Procedure	21
6.5.3.	Test Setting	21
6.5.4.	Test Setup	21
6.5.5.	Test Result	21
6.6.	Frequency Stability Measurement	22
6.6.1.	Test Limit	22
6.6.2.	Test Procedure	22
6.6.3.	Test Setup	22
6.6.4.	Test Result	23
6.7.	Radiated Spurious Emission Measurement.....	24
6.7.1.	Test Limit	24
6.7.2.	Test Procedure	24
6.7.3.	Test Setting	25
6.7.4.	Test Setup	27
6.7.5.	Test Result	28
6.8.	Radiated Restricted Band Edge Measurement	29
6.8.1.	Test Limit	29
6.8.2.	Test Procedure	31
6.8.3.	Test Setting	31
6.8.4.	Test Setup	32
6.8.5.	Test Result	32
6.9.	AC Conducted Emissions Measurement	33
6.9.1.	Test Limit	33
6.9.2.	Test Setup	33
6.9.3.	Test Result	33
Appendix A – Test Result		34
A.1	Duty Cycle Test Result	34
A.2	26dB & 99% Bandwidth Test Result	36
A.3	6dB Bandwidth Test Result	42
A.4	Output Power Test Result	48
A.5	Power Spectral Density Test Result.....	49
A.6	Frequency Stability Test Result.....	60

A.7	Radiated Spurious Emission Test Result	61
A.8	Radiated Restricted Band Edge Test Result.....	86
A.9	AC Conducted Emissions Test Result	110
Appendix B – Test Setup Photograph		112
Appendix C – EUT Photograph		113

1.4. Product Information

Product Name	ACCESS POINT	
Model No.	APINR605	
Serial No.	CNP6L8M02S (Conducted Testing) CNP6L8M00G (Radiated Testing)	
Software Version	RAJB-AB05 V1.6.2	
Wi-Fi Specification	802.11a/b/g/n/ac/ax	
Bluetooth Specification	v5.0 single mode, BLE only	
Zigbee Specification	802.15.4	
Antenna Information	Refer to section 1.7	
Power Type	AC/DC Adapter input	
Operating Environment	<input checked="" type="checkbox"/> Indoor Use	<input type="checkbox"/> Outdoor Use
Accessories		
AC/DC Adapter	Model: ADP-50GR BD Input: 100 ~ 240V 1.3A 50 – 60Hz Output: 48V 1.042A 50.016W	
Optional Integrated Modular	Modular Name: LTE-A Cat 12 M.2 Module Mode No.: APINCM12 Contain FCC ID: XMR201901EM12G Supported UTRA Band: 2, 4, 5 Supported E-UTRA Band: FDD Band: 2, 4, 5, 7, 12, 13, 14, 17, 25, 26, 30, 66, TDD Band: 38, 41	
Note: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.		

1.5. Radio Specification under Test

Frequency Range	For 802.11a/n-HT20/ac-VHT20/ax-HE20: 5845MHz, 5865MHz, 5885MHz For 802.11n-HT40/ac-VHT40/ax-HE40: 5835MHz, 5875MHz For 802.11ac-VHT80/ax-HE80: 5855MHz	
Type of Modulation	802.11a/n/ac: OFDM 802.11ax: OFDMA	
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.6Mbps 802.11ax: up to 1201Mbps	
Channel Puncturing Function	<input type="checkbox"/> Supported	<input checked="" type="checkbox"/> Unsupported
Support RU	<input checked="" type="checkbox"/> Full RU	<input type="checkbox"/> Partial RU

1.6. Working Frequencies

802.11a/n-HT20/ac-VHT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
169	5845 MHz	173	5865 MHz	177	5885 MHz

802.11n-HT40/ac-VHT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
167	5835 MHz	175	5875 MHz	--	--

802.11ac-VHT80/ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
171	5855 MHz	--	--	--	--

1.7. Antenna Details

Antenna Type	Frequency Band (GHz)	Tx Paths	CDD Dir Gain (dBi)		BF Dir Gain (dBi)
			For Power	For PSD	
Wi-Fi Antenna					
PIFA	2.4 ~ 2.5	2	4.4	7.4	7.4
	5.15 ~ 5.9	2	4.7	7.6	7.6
	5.9 ~ 7.2	2	4.7	7.7	7.7

Note:

- 1, The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.
- 2, The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac/ax, not include 802.11a/b/g.
3. For beamforming operation, Aruba OS automatically backs power down based on a $10\log(N)$ factor based on CDD power.
4. The detail calculation method of directional gain refer to antenna specification provided by the applicant.

1.8. Description of Operating Paths

Filter	Specification	Remark
Wi-Fi		
Filter 1#	Band Pass Filter (2412-2472)	Allowing any transmission on all channels
Filter 2#	Band Pass Filter (2402-2447)	Allowing any transmission on 20MHz channels 1 thru 6 and 40MHz channel 3.
Filter 3#	Band Pass Filter (2452-2472)	Allowing any transmission on 20MHz channel 11
Filter 4#	Band Pass Filter (5150-5895)	Allowing any transmission on all channels
Filter 5#	Band Pass Filter (5150-5835)	Allowing any transmission on UNII Band 1/2a/2c/3
Filter 6#	Band Pass Filter (5925-7125)	Allowing any transmission on UNII Band 5/6/7/8
Bluetooth / ZigBee		
Filter 7#	Band Pass Filter (2402-2480)	Allowing any transmission on all channels
Filter 8#	Band Pass Filter (2402-2430)	Allowing transmission on BLE channels 37 (2402MHz) and 38 (2426MHz) and Zigbee channel 11 (2405MHz)
Filter 9#	Band Pass Filter (2478-2482)	Allowing transmission on BLE channel 39 (2480MHz) and Zigbee channel 26(2480MHz)
Note: ZigBee and BLE can't work simultaneously.		

Working Mode


	Radio 0	Radio 1	BLE/ZigBee
1	2.4G_Full Band (Filter 1#)	6G_Full Band (Filter 6#)	---
2	---	6G_Full Band (Filter 6#)	2.4G_Full Band (Filter 7#)
3	2.4G_Low Band (Filter 2#)	6G_Full Band (Filter 6#)	2.4G_High Band (Filter 9#)
4	2.4G_High Band (Filter 3#)	6G_Full Band (Filter 6#)	2.4G_Low Band (Filter 8#)
5	5G_Full Band (Filter 4#)	2.4G_Full Band (Filter 1#)	---
6	5G_Full Band (Filter 4#)	---	2.4G_Full Band (Filter 7#)
7	5G_Full Band (Filter 4#)	2.4G_Low Band (Filter 2#)	2.4G_High Band (Filter 9#)
8	5G_Full Band (Filter 4#)	2.4G_High Band (Filter 3#)	2.4G_Low Band (Filter 8#)
9	5G_Full Band (Filter 5#)	6G_Full Band (Filter 6#)	2.4G_Full Band (Filter 1#)
10	5G_Full Band (Filter 5#)	6G_Full Band (Filter 6#)	2.4G_Full Band (Filter 1#)
11	5G_Full Band (Filter 5#)	6G_Full Band (Filter 6#)	2.4G_Full Band (Filter 1#)
12	5G_Full Band (Filter 5#)	6G_Full Band (Filter 6#)	2.4G_Full Band (Filter 1#)

2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by 802.11a_Nss=1 (6Mbps)
Mode 2: Transmit by 802.11ac-VHT20_Nss=1 (MCS0)
Mode 3: Transmit by 802.11ac-VHT40_Nss=1 (MCS0)
Mode 4: Transmit by 802.11ac-VHT80_Nss=1 (MCS0)
Mode 5: Transmit by 802.11ax-HE20_Nss=1 (MCS0)
Mode 6: Transmit by 802.11ax-HE40_Nss=1 (MCS0)
Mode 7: Transmit by 802.11ax-HE80_Nss=1 (MCS0)
Note 1: 802.11n and 802.11ac have same modulation type and same power value, so we only show 802.11ac test data in report.
Note 2: All modes of operation and data rates were investigated, so all RF test requirements shall be executed at the worst data rate.

2.2. Test System Connection Diagram

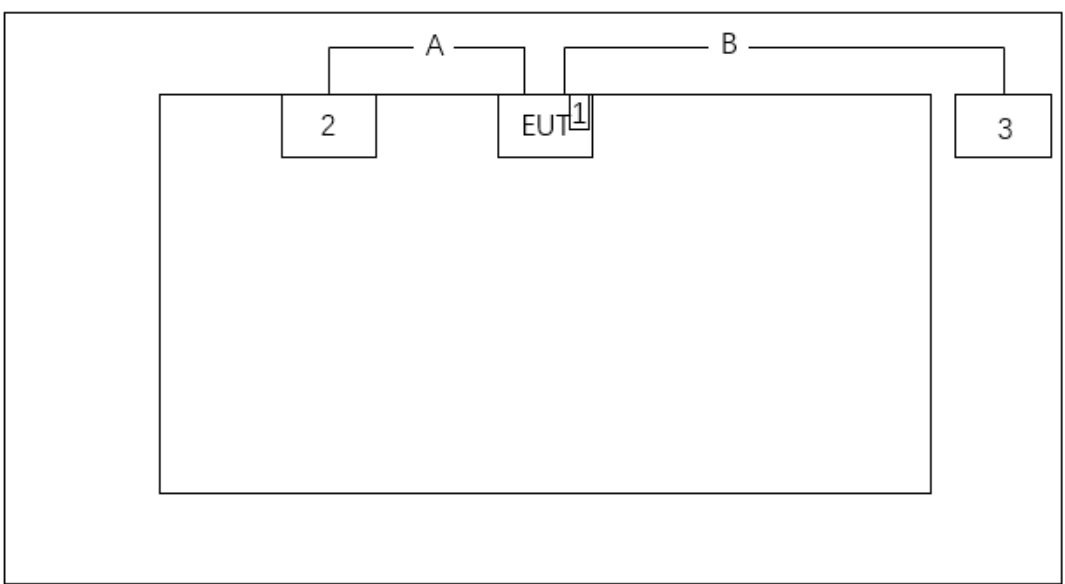

The diagram shows a test system connection. A central box labeled 'EUT' (Equipment Under Test) is connected to three external components: '2' (AC Adapter), '3' (Notebook), and '1' (USB Flash Disk). Cable 'A' connects the EUT to component '2'. Cable 'B' connects the EUT to component '3'. Component '1' is connected to the EUT via a USB connection.

Cable Type		Cable Spec.	Length
A	Power Cable	Non-Shielding	1.5m
B	Ethernet Cable	Non-Shielding, Cat 5e	>10.0m
Product		Manufacturer	Model No.
1	USB Flash Disk	SanDisk	N/A
2	AC Adapter	APD	WB-18Q12R
3	Notebook	Dell	Latitude 5491

2.3. Test Software

The test utility software used during testing was “accessMTool”, and the version was 3.2.1.5.

Note: Final power setting please refer to operational description.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.407
- KDB 789033 D02v02r01
- KDB 291074 D02v01
- KDB 662911 D01v02r01
- ANSI C63.10-2013

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

KDB 291074 DR01: An Indoor Access point in the U-NII-4 band (5.850-5.895 GHz) and U-NII -3 & -4 span channels must use an integrated antenna.

- The antenna of the device is built in and locked inside the enclosure.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2023-05-20	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2023-06-04	WZ-AC2
Thermohygrometer	Mingle	ETH529	MRTSUE06170	1 year	2023-11-27	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2023-10-13	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2023-05-08	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2023-04-21	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11038	1 year	2023-11-01	WZ-AC2
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2023-09-29	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2023-11-05	WZ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2024-01-12	WZ-AC2
Signal Generator	Agilent	E4438C	MRTSUE06081	1 year	2024-02-29	WZ-SR5
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2023-06-06	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2023-06-04	WZ-SR5
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2023-10-08	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2023-06-06	WZ-TR3
Signal Analyzer	Keysight	N9020B	MRTSUE06583	1 year	2023-10-08	WZ-TR3
Attenuator	MVE	MVE2213	MRTSUE11073	1 year	2023-06-09	WZ
Attenuator	MVE	MVE2213	MRTSUE11074	1 year	2023-06-09	WZ
Attenuator	MVE	MVE2213	MRTSUE11086	1 year	2023-06-09	WZ
Attenuator	MVE	MVE2213	MRTSUE11087	1 year	2023-06-09	WZ

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
BenchVue Power Meter	2018.1	Power
Controller_MF 7802	1.02	RE Antenna & Turntable

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.59dB Coplanar: 9kHz~30MHz: 2.60dB Horizontal: 30MHz~200MHz: 3.85dB 200MHz~1GHz: 4.36dB 1GHz~40GHz: 4.98dB Vertical: 30MHz~200MHz: 4.06dB 200MHz~1GHz: 5.28dB 1GHz~40GHz: 4.91dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.3dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.5dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 2.3dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 3.2%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.407(a)	26dB Bandwidth	Conducted	Pass
15.407(e)	6dB Bandwidth		Pass
15.407(a)(3)(ii)	Maximum Conducted Output Power		Pass
15.407(a)(3)(ii)(12)	Peak Power Spectral Density		Pass
15.407(b)(5)	Undesirable Emissions	Radiated	Pass
15.205, 15.209 15.407(b)(5)(i), (8), (9)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)		Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Notes:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. 26dB & 99% Bandwidth Measurement

6.2.1. Test Limit

N/A

6.2.2. Test Procedure

KDB 789033 D02v02r01- Section C.1 (26dB Bandwidth)

KDB 789033 D02v02r01- Section D (99% Bandwidth)

6.2.3. Test Setting


26dB Bandwidth

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold.

99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1% to 5% of the OBW
4. Set VBW $\geq 3 \times$ RBW
5. Detector = Peak.
6. Use the 99% power bandwidth function of the instrument.

6.2.4. Test Setup

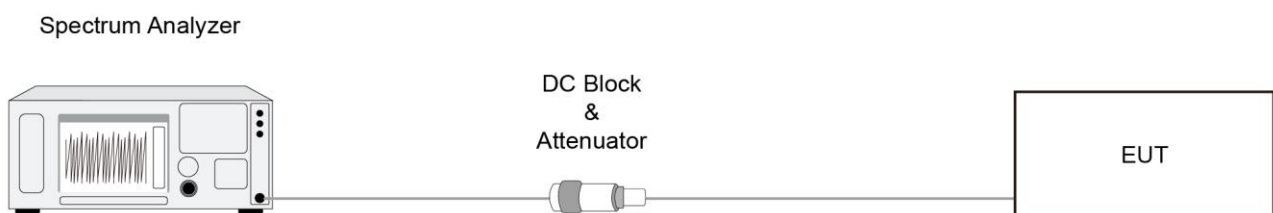

6.2.5. Test Result

Refer to Appendix A.2.

6.3. 6dB Bandwidth Measurement

6.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.3.2. Test Procedure

KDB 789033 D02v02r01- Section C.2

6.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.4. Test Setup

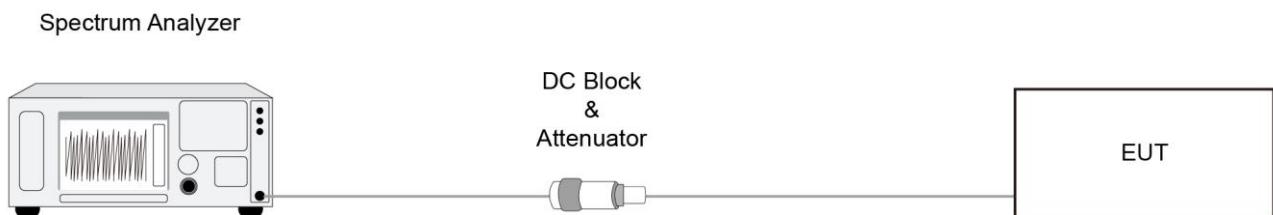

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Output Power Measurement

6.4.1. Test Limit

For an indoor access point operating in the 5.850-5.895 GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm. Indoor access points operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands must not exceed an e.i.r.p. of 36 dBm.

6.4.2. Test Procedure


KDB 789033D02v02r01- Section E)3)b) Method PM-G

6.4.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.4.4. Test Setup

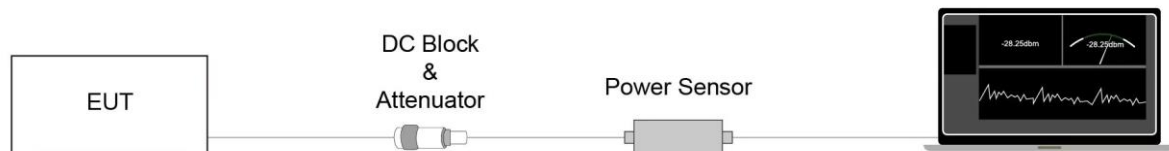

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Power Spectral Density Measurement

6.5.1. Test Limit

For an indoor access point operating in the 5.850-5.895 GHz band, the maximum power spectral density must not exceed 20 dBm e.i.r.p. in any 1-megahertz band.


6.5.2. Test Procedure

KDB 789033 D02v02r01-SectionF

6.5.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz
4. VBW = 3 × RBW
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

6.5.4. Test Setup

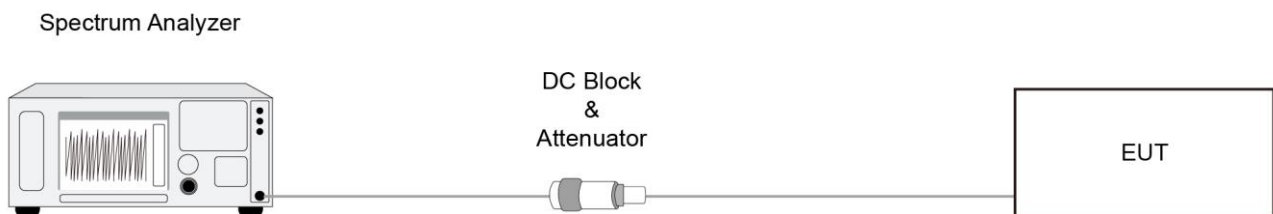

6.5.5. Test Result

Refer to Appendix A.5.

6.6. Frequency Stability Measurement

6.6.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.6.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

6.6.3. Test Setup

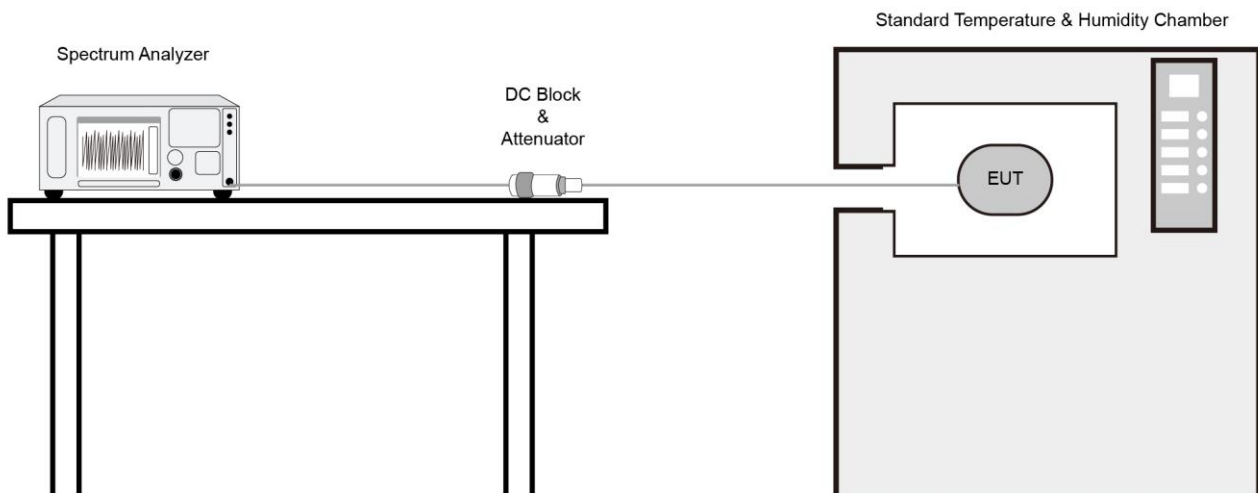

6.6.4. Test Result

Refer to Appendix A.6.

6.7. Radiated Spurious Emission Measurement

6.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency	Field Strength	Measured Distance
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2. Test Procedure

KDB 789033 D02v02r01- Section G.

6.7.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.

802.11a	VBW = 510Hz	802.11ax-HE20	VBW = 180Hz
802.11ac-VHT20	VBW = 180Hz	802.11ax-HE40	VBW = 180Hz
802.11ac-VHT40	VBW = 180Hz	802.11ax-HE80	VBW = 180Hz
802.11ac-VHT80	VBW = 180Hz		


4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.7.4. Test Setup


Below 30MHz Test Setup:

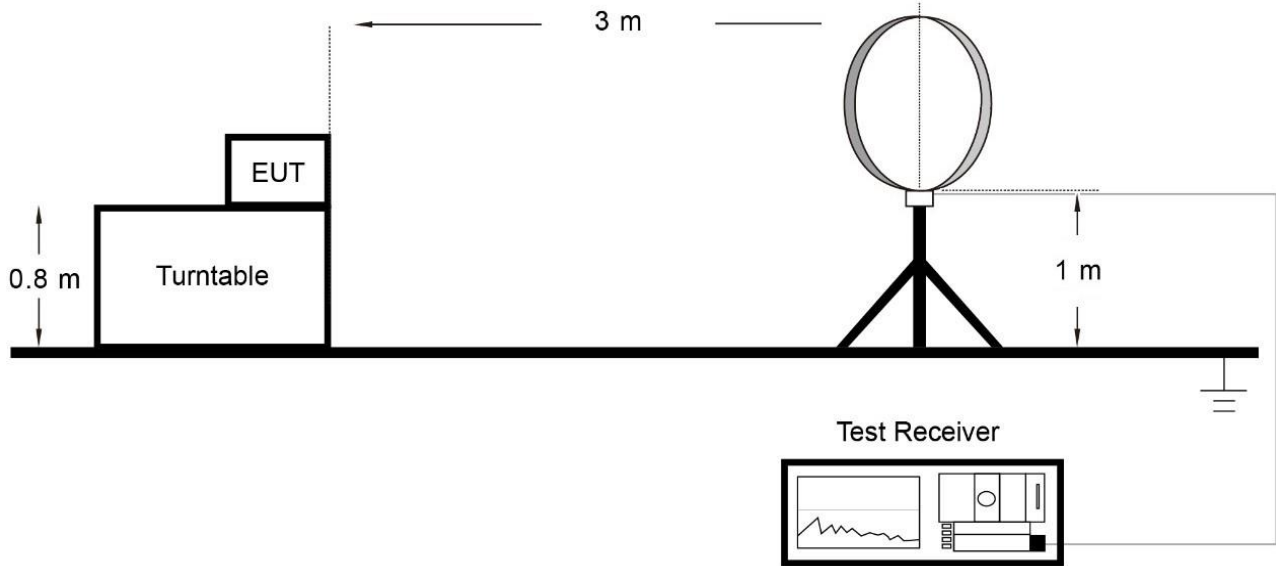

Below 1GHz Test Setup:

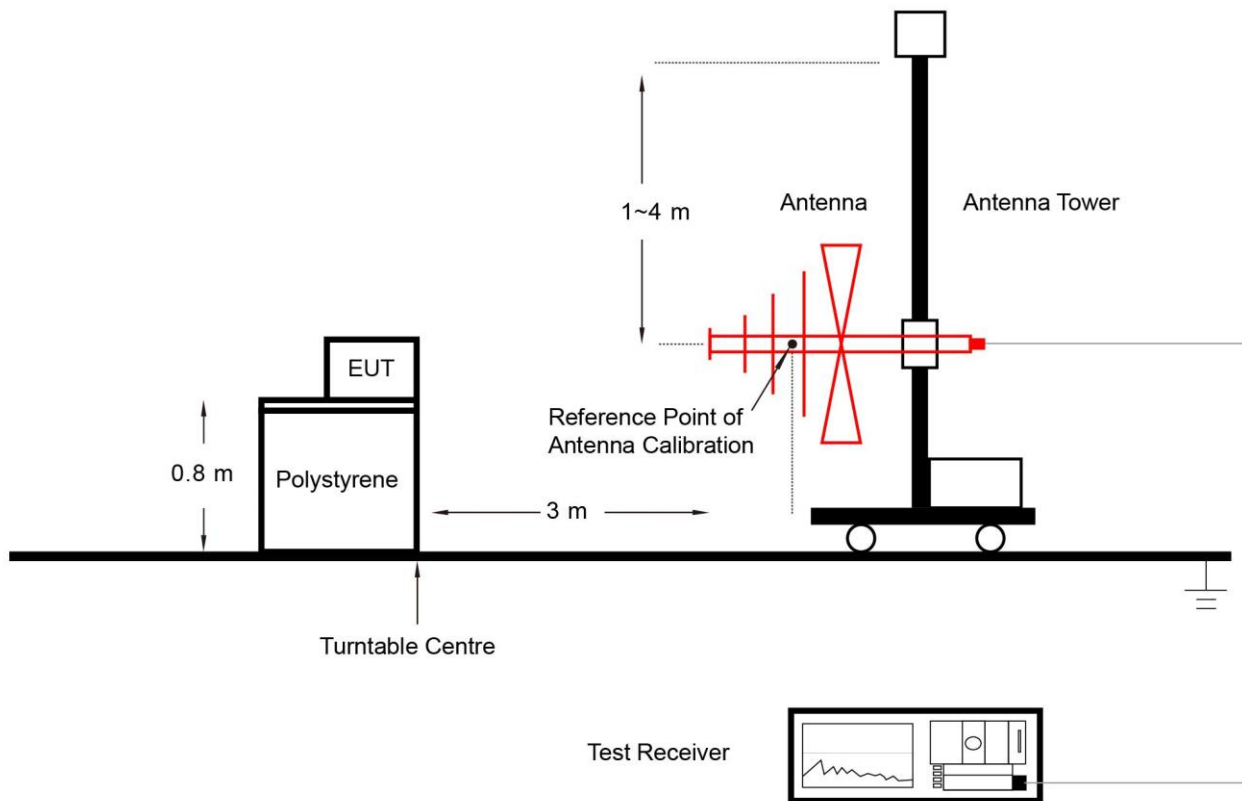

Above 1GHz Test Setup:

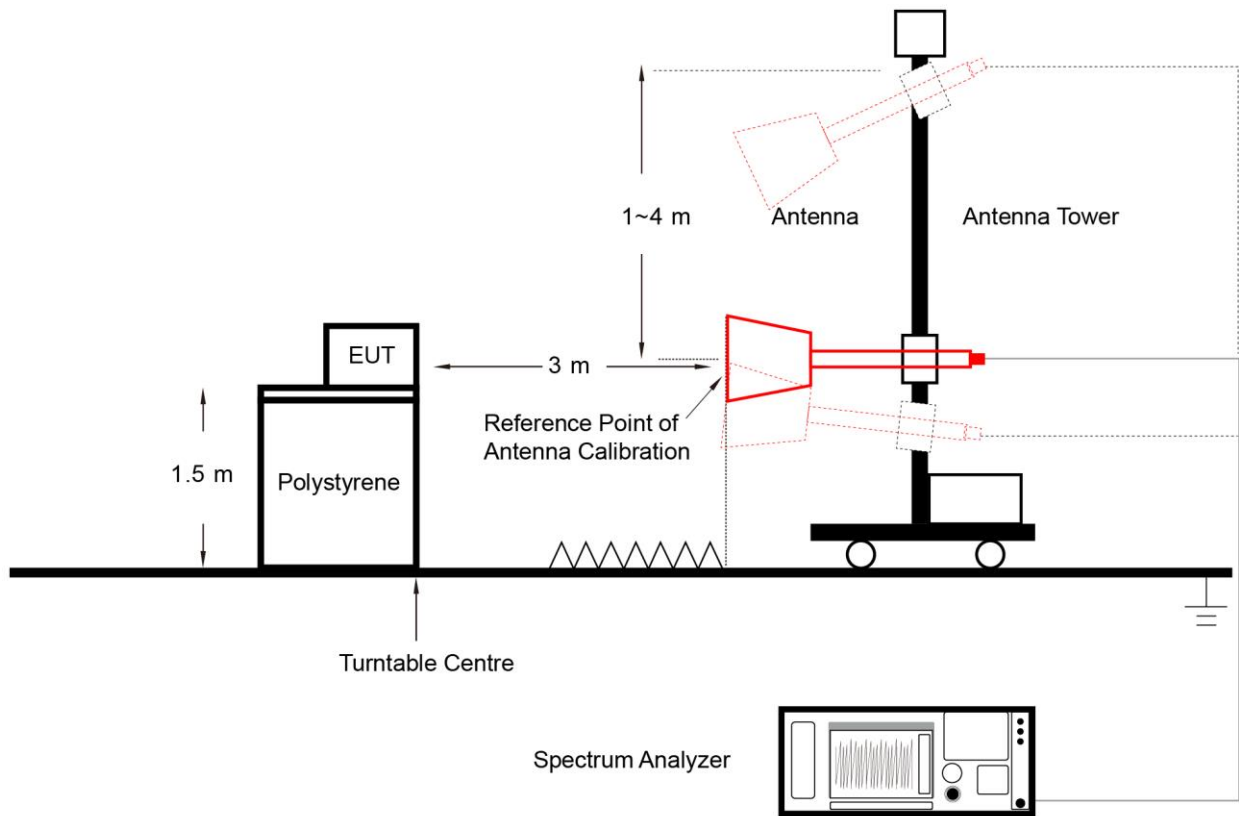

6.7.5. Test Result

Refer to Appendix A.7.

6.8. Radiated Restricted Band Edge Measurement

6.8.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

For an indoor access point, all emissions at or above 5.895GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of -7 dBm/MHz at or above 5.925GHz.

For indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

$E \text{ [dB}\mu\text{V/m]} = \text{EIRP [dBm]} + 95.2$, for example, $-27 \text{ dBm/MHz} = 68.2 \text{ dB}\mu\text{V/m}$

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.8.2. Test Procedure

KDB 789033 D02v02r01- Section G

6.8.3. Test Setting

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
4. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration

802.11a	VBW = 510Hz	802.11ax-HE20	VBW = 680Hz
802.11ac-VHT20	VBW = 560Hz	802.11ax-HE40	VBW = 1300Hz
802.11ac-VHT40	VBW = 1100Hz	802.11ax-HE80	VBW = 2500Hz
802.11ac-VHT80	VBW = 2200Hz	---	---

5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.8.4. Test Setup

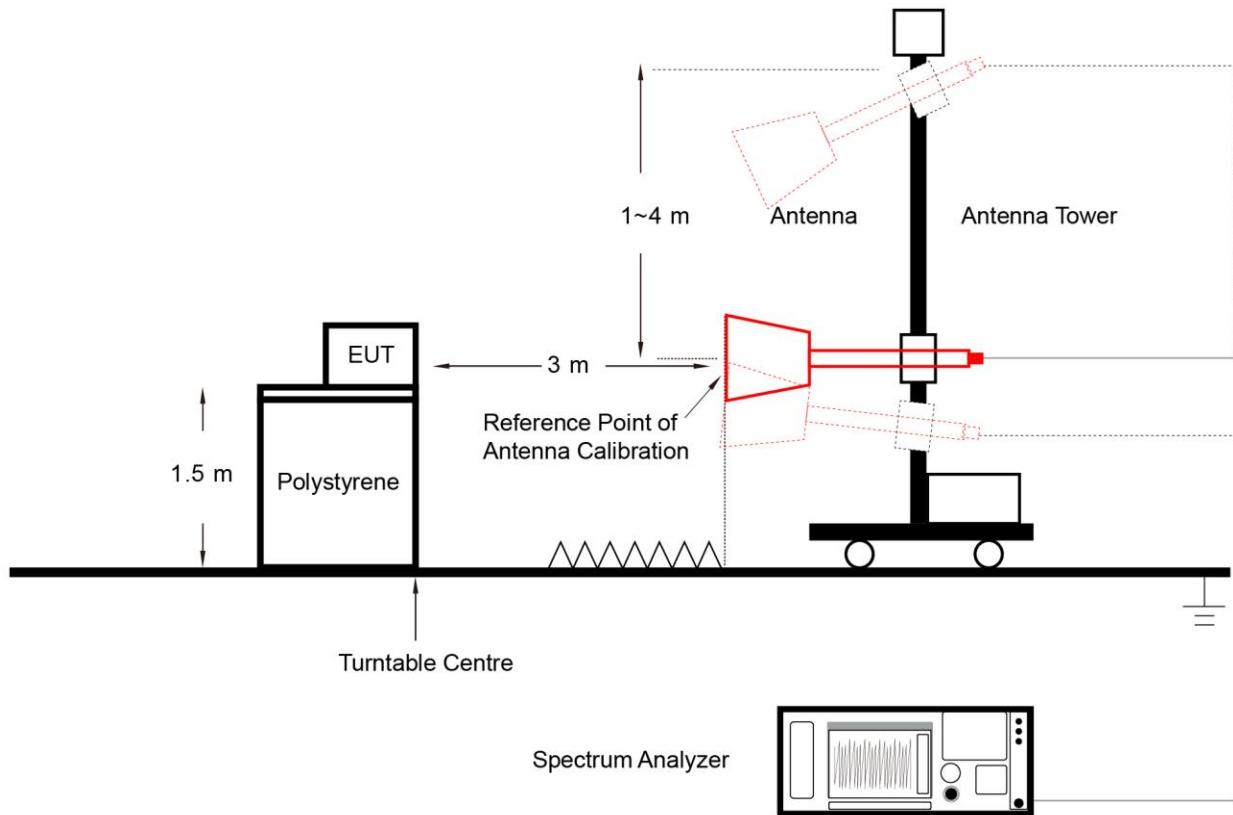

6.8.5. Test Result

Refer to Appendix A.8.

6.9. AC Conducted Emissions Measurement


6.9.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.9.2. Test Setup

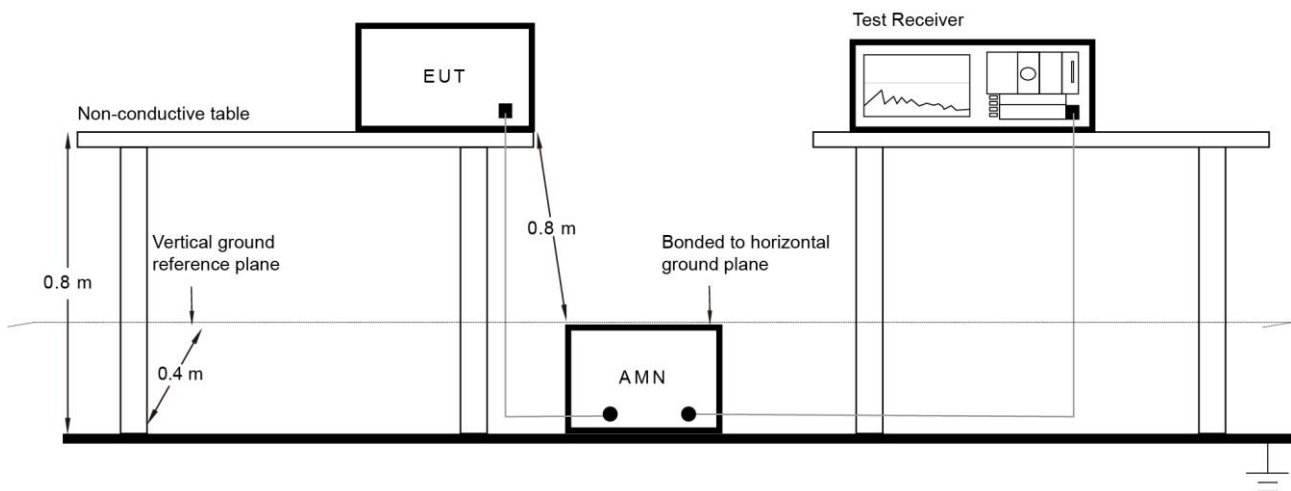

6.9.3. Test Result

Refer to Appendix A.9.


Appendix A – Test Result

A.1 Duty Cycle Test Result

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2022-11-30~2022-12-01		


Test Mode	Duty Cycle
802.11a	94.12%
802.11ac-VHT20	97.69%
802.11ac-VHT40	96.40%
802.11ac-VHT80	93.11%
802.11ax-HE20	97.04%
802.11ax-HE40	95.63%
802.11ax-HE80	92.45%

Duty Cycle (T = Transmission Duration)

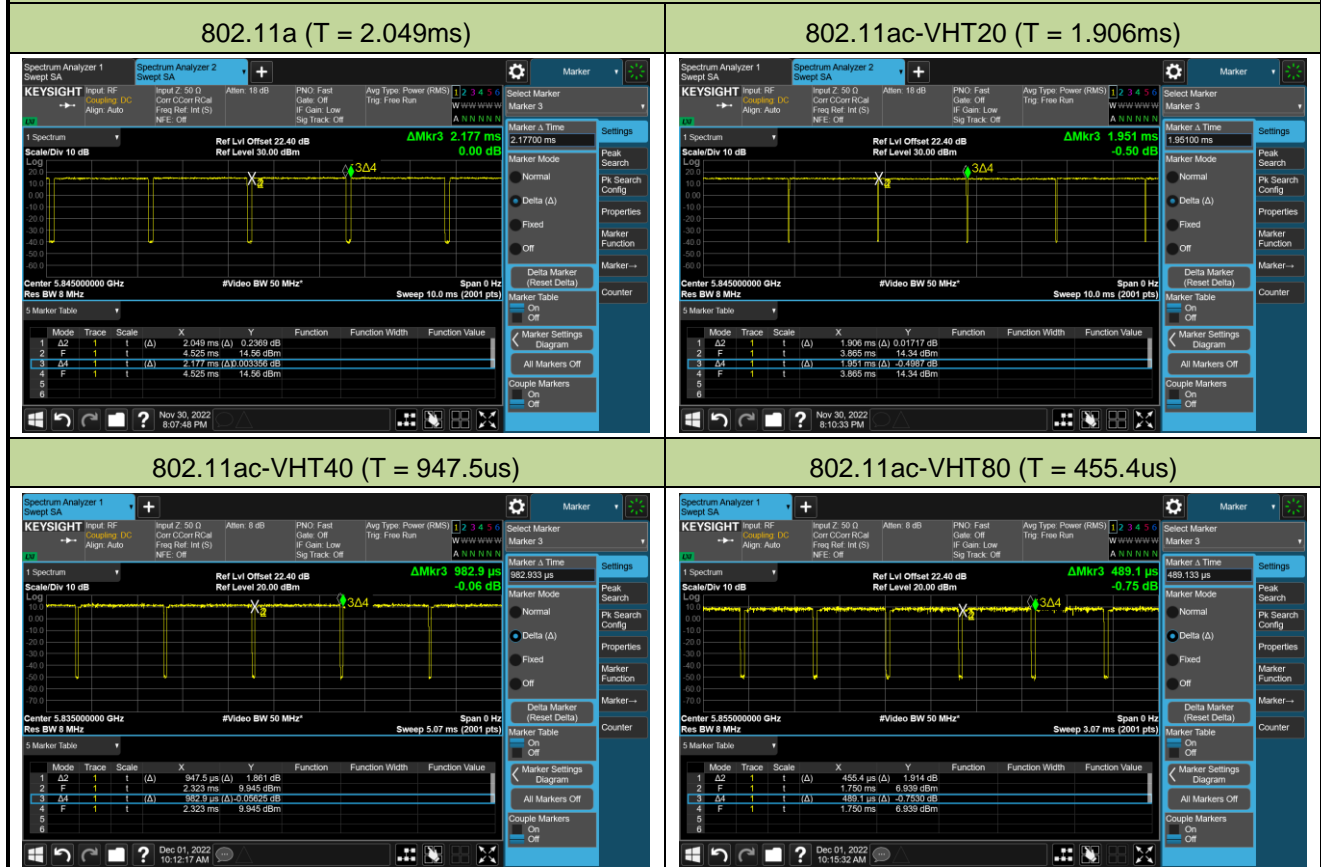


Duty Cycle (T = Transmission Duration)


802.11ax-HE20 (T = 1.475ms)

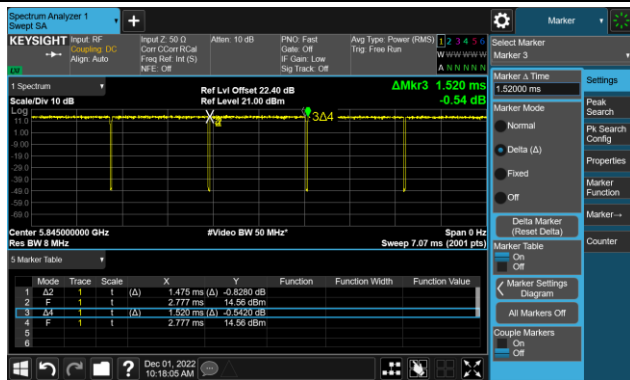

802.11ax-HE40 (T = 777.7us)

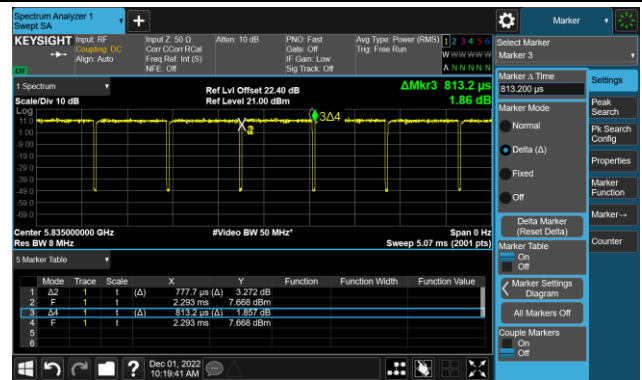


802.11ax-HE80 (T = 412.5us)

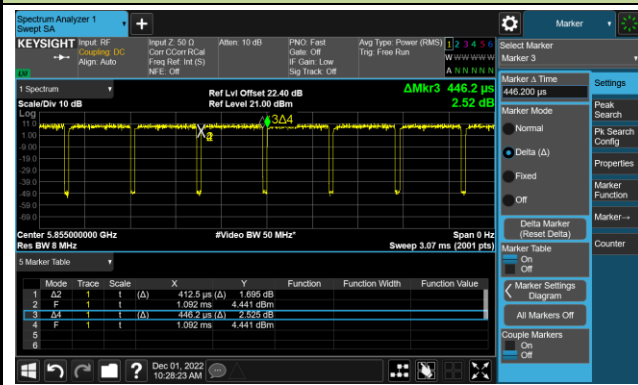

A.2 26dB & 99% Bandwidth Test Result


Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2022-10-31		

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	99% Bandwidth (MHz)	26dB Bandwidth (MHz)
11a	6Mbps	169	5845	16.858	21.69
11a	6Mbps	173	5865	16.877	21.82
11a	6Mbps	177	5885	16.868	21.80
11ac-VHT20	MCS0	169	5845	17.940	21.69
11ac-VHT20	MCS0	173	5865	17.975	21.83
11ac-VHT20	MCS0	177	5885	17.951	21.67
11ac-VHT40	MCS0	167	5835	36.358	39.81
11ac-VHT40	MCS0	175	5875	36.345	40.38
11ac-VHT80	MCS0	171	5855	75.820	83.37
11ax-HE20	MCS0	169	5845	19.054	22.34
11ax-HE20	MCS0	173	5865	19.053	22.19
11ax-HE20	MCS0	177	5885	19.071	21.66
11ax-HE40	MCS0	167	5835	37.597	40.03
11ax-HE40	MCS0	175	5875	37.609	40.03
11ax-HE80	MCS0	171	5855	76.826	80.80

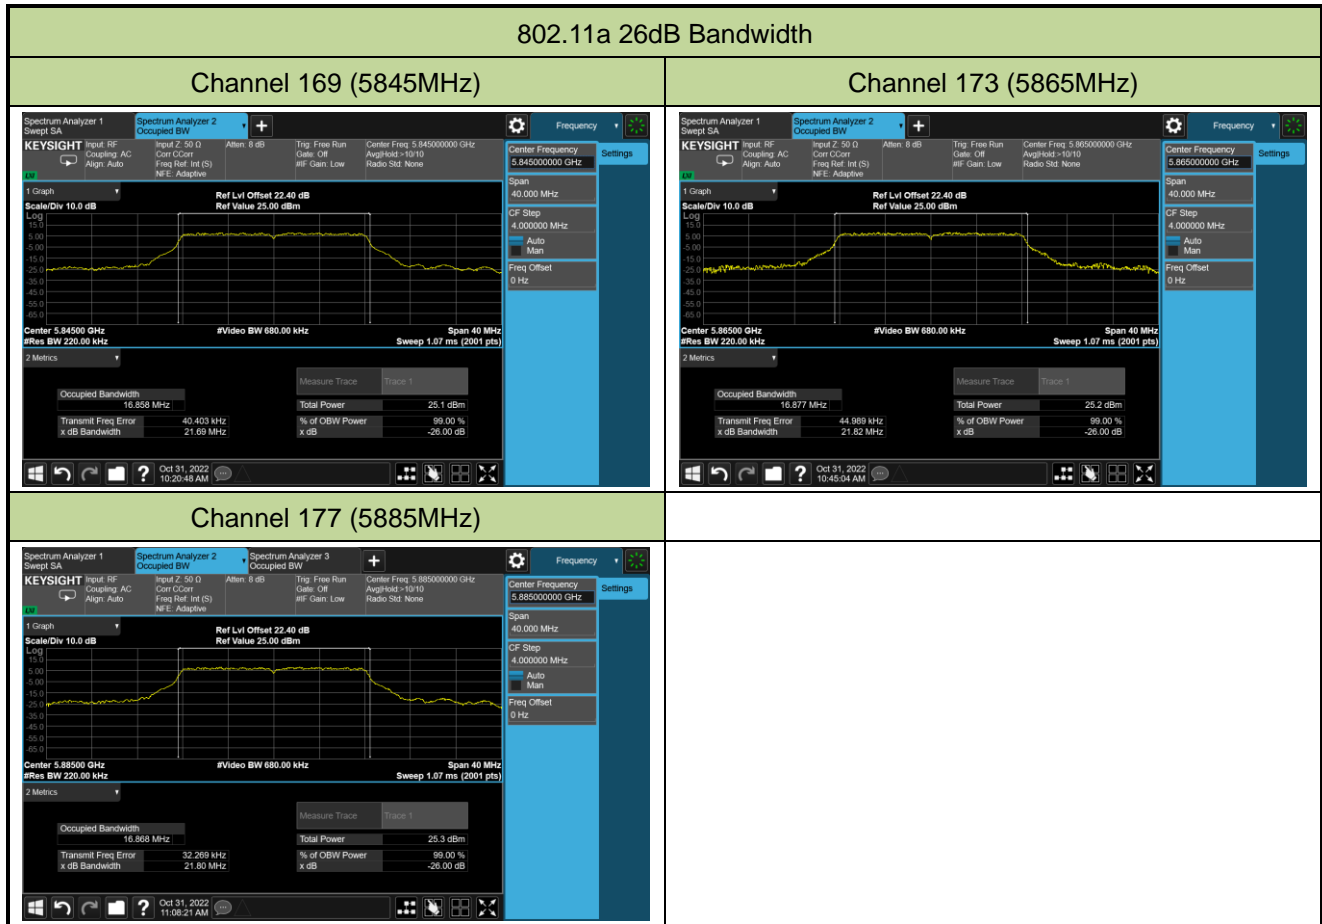


802.11ac-VHT20 26dB Bandwidth


Channel 169 (5845MHz)

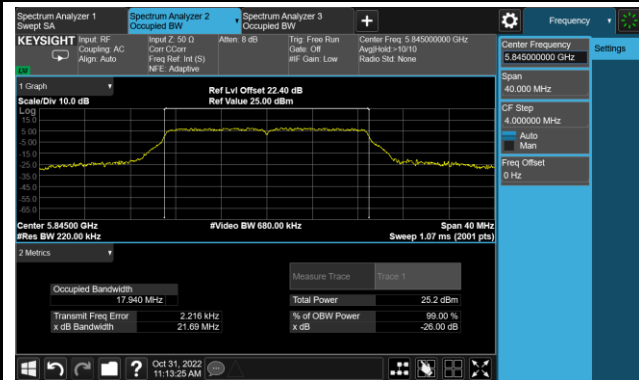

Channel 173 (5865MHz)

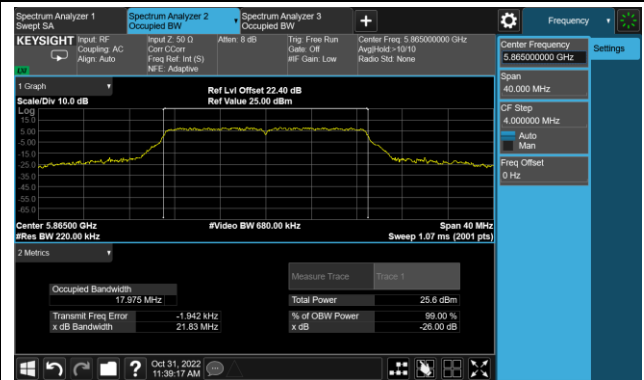


Channel 177 (5885MHz)

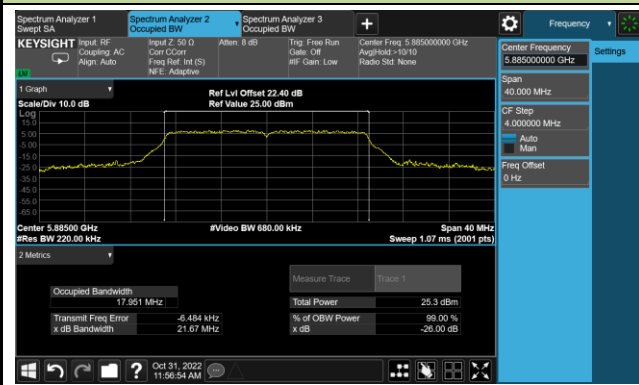


802.11ac-VHT40 26dB Bandwidth

Channel 167 (5835MHz)

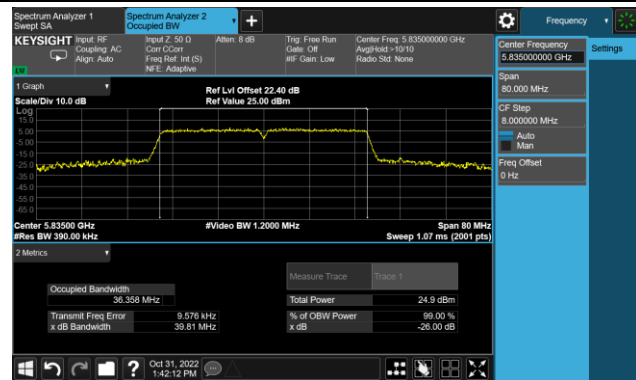


Channel 175(5875MHz)

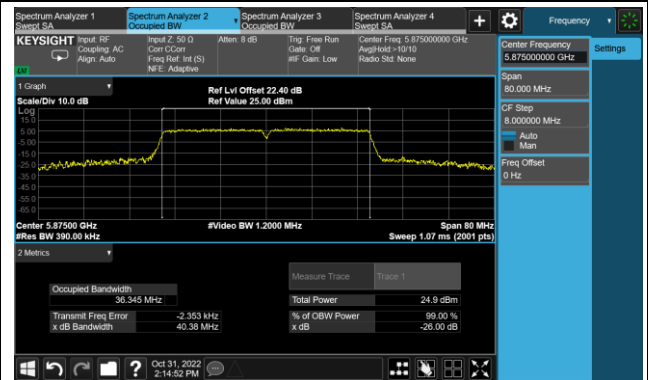


802.11ac-VHT80 26dB Bandwidth

Channel 171 (5855MHz)

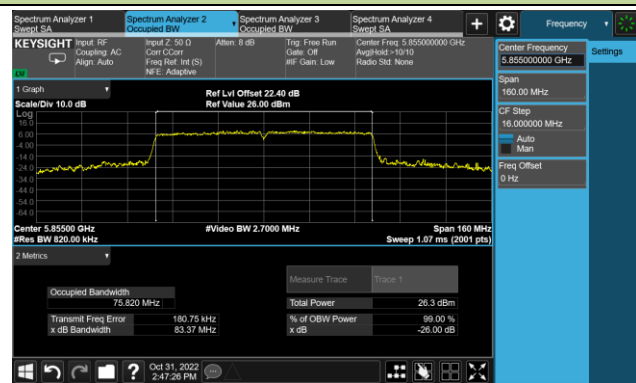


802.11ax-HE20 26dB Bandwidth


Channel 169 (5845MHz)

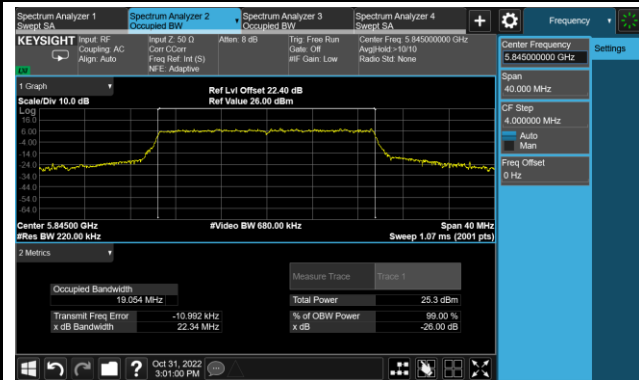

Channel 173 (5865MHz)

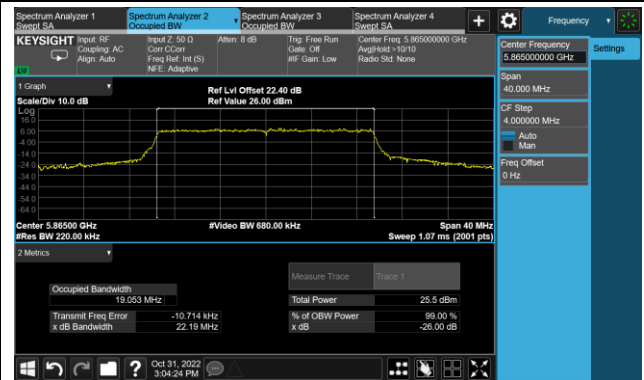


Channel 177 (5885MHz)

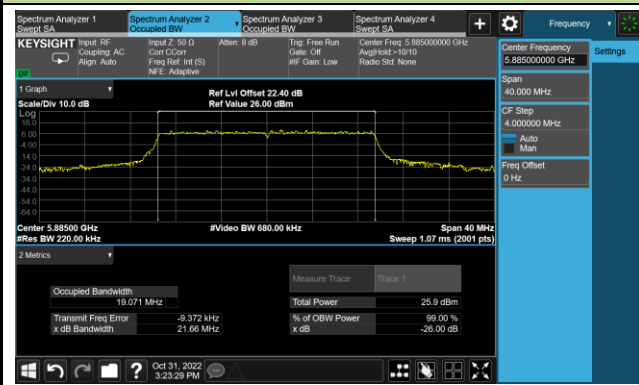


802.11ax-HE40 26dB Bandwidth

Channel 167 (5835MHz)

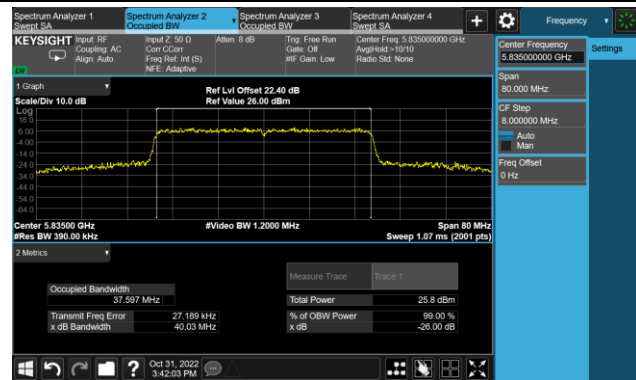


Channel 175(5875MHz)

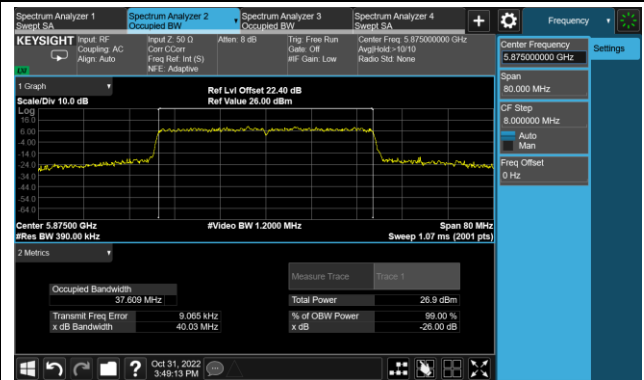

802.11ax-HE80 26dB Bandwidth


Channel 171 (5855MHz)

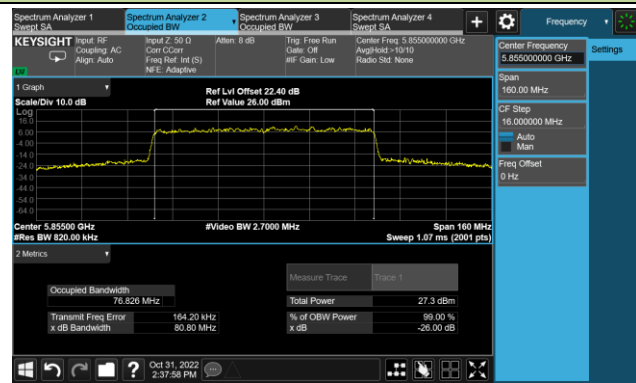

A.3 6dB Bandwidth Test Result


Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2022-10-31		

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11a	6Mbps	169	5845	16.36	≥ 0.5
11a	6Mbps	173	5865	16.37	≥ 0.5
11a	6Mbps	177	5885	16.37	≥ 0.5
11ac-VHT20	MCS0	169	5845	17.60	≥ 0.5
11ac-VHT20	MCS0	173	5865	17.60	≥ 0.5
11ac-VHT20	MCS0	177	5885	17.58	≥ 0.5
11ac-VHT40	MCS0	167	5835	36.38	≥ 0.5
11ac-VHT40	MCS0	175	5875	36.37	≥ 0.5
11ac-VHT80	MCS0	171	5855	75.84	≥ 0.5
11ax-HE20	MCS0	169	5845	18.88	≥ 0.5
11ax-HE20	MCS0	173	5865	18.96	≥ 0.5
11ax-HE20	MCS0	177	5885	19.01	≥ 0.5
11ax-HE40	MCS0	167	5835	37.62	≥ 0.5
11ax-HE40	MCS0	175	5875	37.50	≥ 0.5
11ax-HE80	MCS0	171	5855	76.25	≥ 0.5

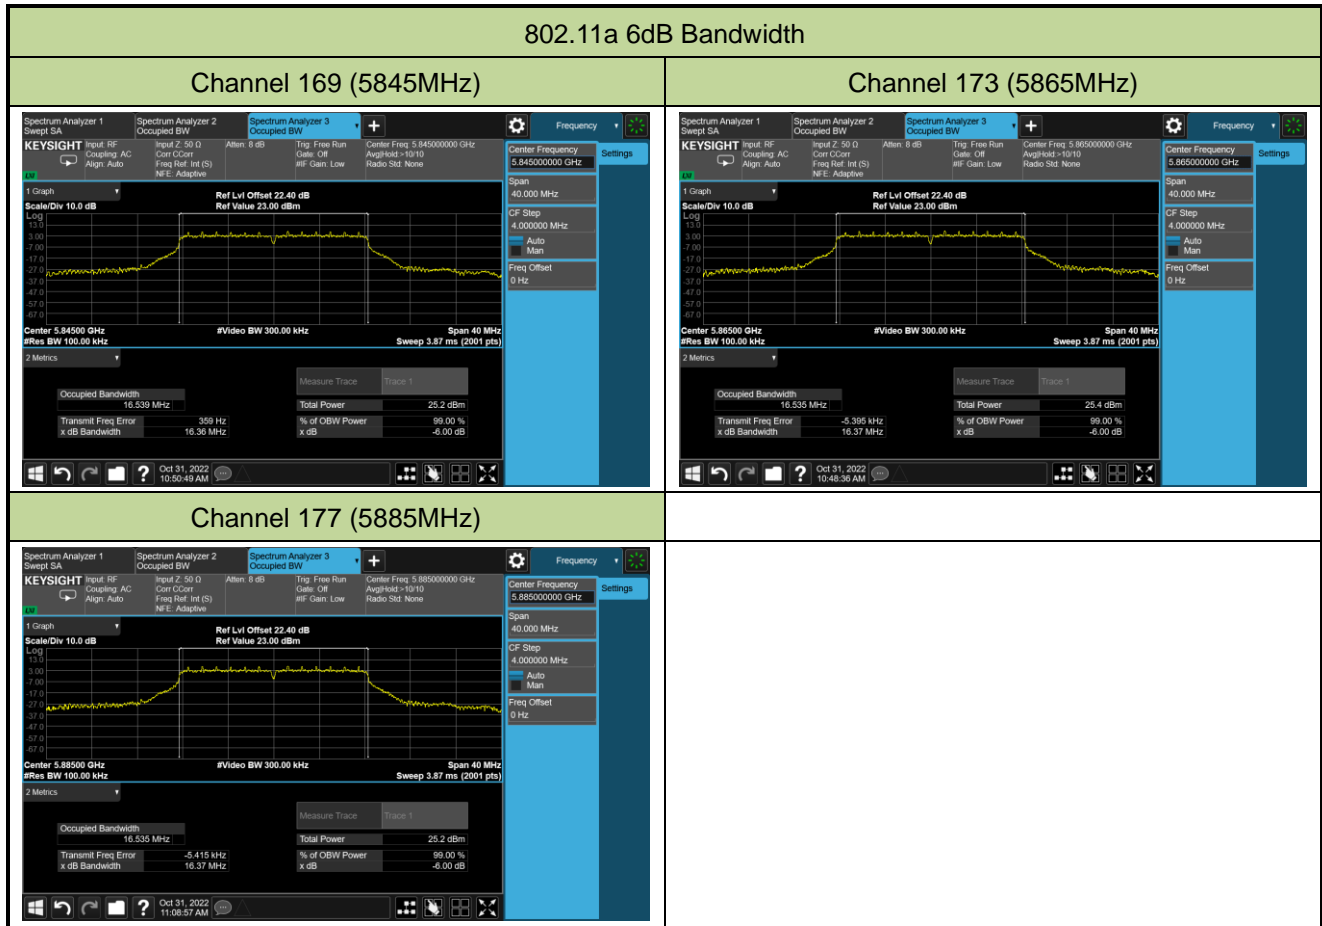


802.11ac-VHT20 6dB Bandwidth


Channel 169 (5845MHz)

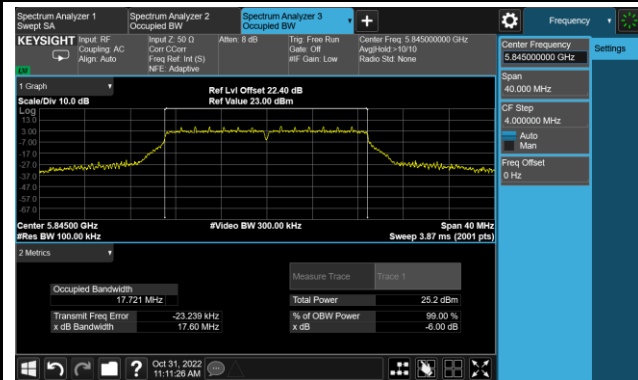

Channel 173 (5865MHz)

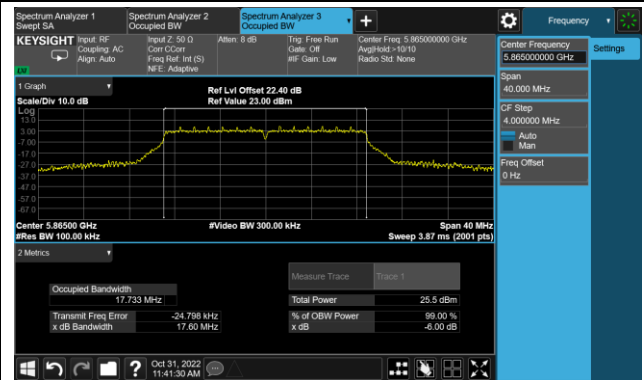


Channel 177 (5885MHz)

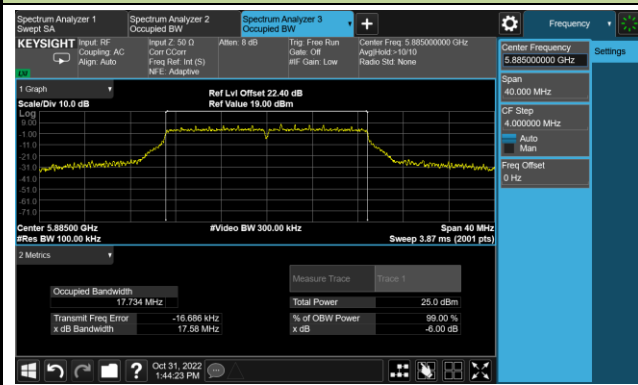


802.11ac-VHT40 6dB Bandwidth

Channel 167 (5835MHz)

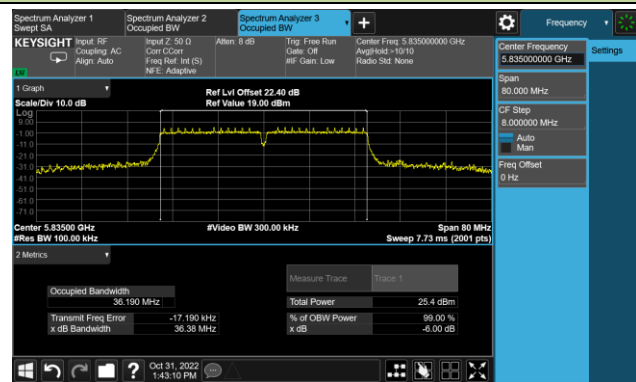


Channel 175(5875MHz)

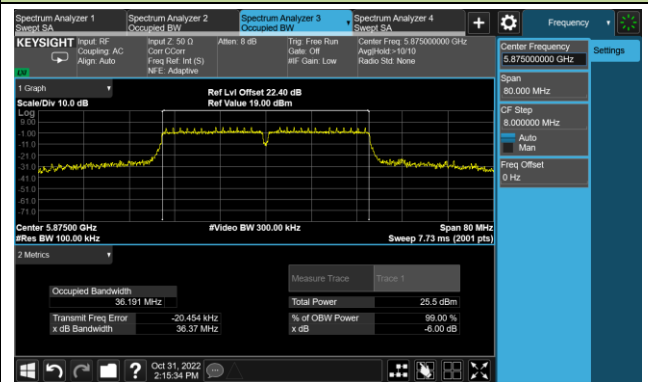


802.11ac-VHT80 6dB Bandwidth

Channel 171 (5855MHz)

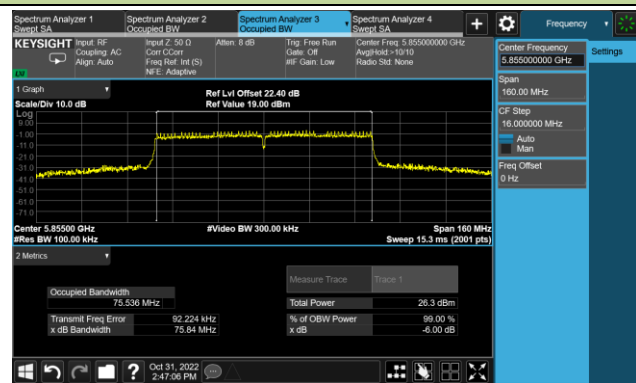


802.11ax-HE20 6dB Bandwidth


Channel 169 (5845MHz)

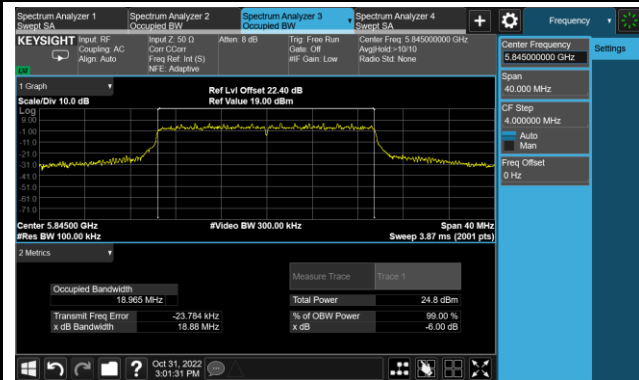

Channel 173 (5865MHz)

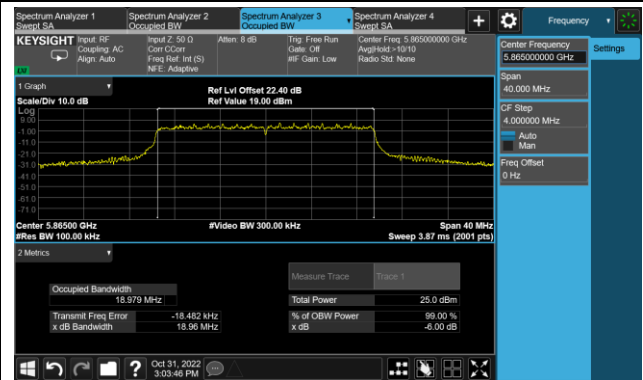


Channel 177 (5885MHz)

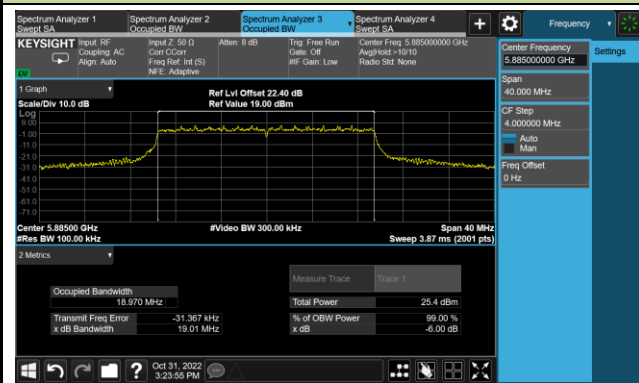


802.11ax-HE40 6dB Bandwidth

Channel 167 (5835MHz)

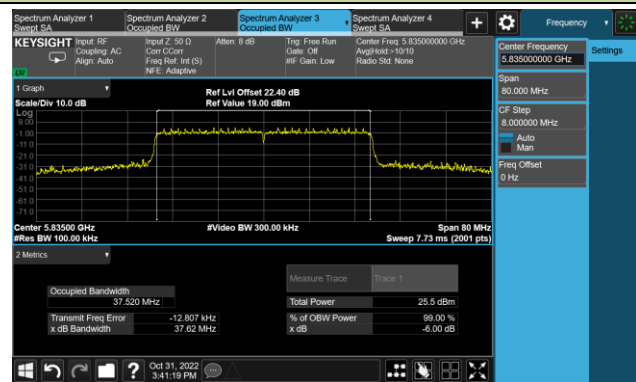


Channel 175(5875MHz)

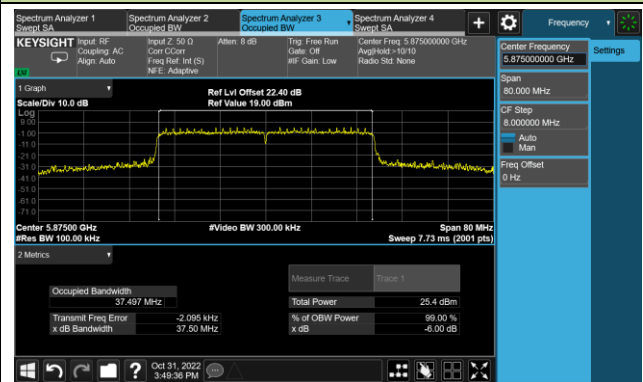

802.11ax-HE80 6dB Bandwidth

Channel 171 (5855MHz)

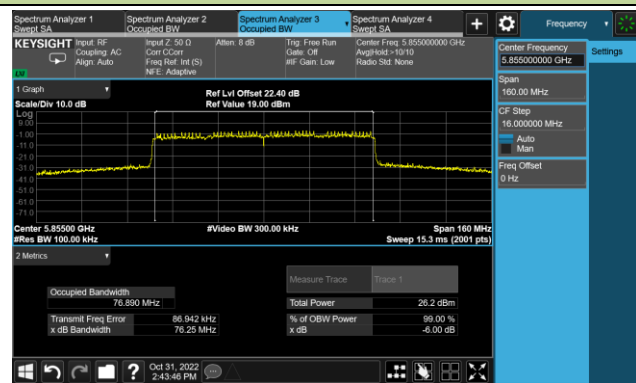

A.4 Output Power Test Result

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2022-10-30~2022-10-31		

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Antenna Gain (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)
				Ant 0	Ant 1				
11a	6Mbps	169	5845	18.02	17.98	21.01	4.70	25.71	≤ 36.00
11a	6Mbps	173	5865	18.25	18.03	21.15	4.70	25.85	≤ 36.00
11a	6Mbps	177	5885	18.04	17.83	20.95	4.70	25.65	≤ 36.00
11ac-VHT20	MCS0	169	5845	18.03	17.92	20.99	4.70	25.69	≤ 36.00
11ac-VHT20	MCS0	173	5865	18.21	18.13	21.18	4.70	25.88	≤ 36.00
11ac-VHT20	MCS0	177	5885	18.21	18.11	21.17	4.70	25.87	≤ 36.00
11ac-VHT40	MCS0	167	5835	18.24	18.08	21.17	4.70	25.87	≤ 36.00
11ac-VHT40	MCS0	175	5875	18.13	18.04	21.10	4.70	25.80	≤ 36.00
11ac-VHT80	MCS0	171	5855	18.05	18.10	21.09	4.70	25.79	≤ 36.00
11ax-HE20	MCS0	169	5845	18.10	18.04	21.08	4.70	25.78	≤ 36.00
11ax-HE20	MCS0	173	5865	18.07	18.03	21.06	4.70	25.76	≤ 36.00
11ax-HE20	MCS0	177	5885	18.16	17.98	21.08	4.70	25.78	≤ 36.00
11ax-HE40	MCS0	167	5835	18.22	18.10	21.17	4.70	25.87	≤ 36.00
11ax-HE40	MCS0	175	5875	18.21	18.13	21.18	4.70	25.88	≤ 36.00
11ax-HE80	MCS0	171	5855	18.01	18.08	21.06	4.70	25.76	≤ 36.00

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: EIRP Power (dBm) = Total Average Power (dBm) + Antenna Gain (dBi).

A.5 Power Spectral Density Test Result

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2022-10-31		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/MHz)		Duty Cycle (%)	Total PSD (dBm/MHz)	ANT Gain (dBi)	EIRP PSD (dBm/MHz)	EIRP PSD Limit (dBm/MHz)
				Ant 0	Ant 1					
11a	6Mbps	169	5845	6.21	6.19	94.12	9.48	7.60	17.08	≤ 20.00
11a	6Mbps	173	5865	6.64	6.47	94.12	9.83	7.60	17.43	≤ 20.00
11a	6Mbps	177	5885	6.38	6.33	94.12	9.63	7.60	17.23	≤ 20.00
11ac-VHT20	MCS0	169	5845	6.10	6.07	97.69	9.20	7.60	16.80	≤ 20.00
11ac-VHT20	MCS0	173	5865	6.54	6.35	97.69	9.56	7.60	17.16	≤ 20.00
11ac-VHT20	MCS0	177	5885	6.14	6.12	97.69	9.24	7.60	16.84	≤ 20.00
11ac-VHT40	MCS0	167	5835	3.31	3.25	96.40	6.45	7.60	14.05	≤ 20.00
11ac-VHT40	MCS0	175	5875	3.64	3.61	96.40	6.80	7.60	14.40	≤ 20.00
11ac-VHT80	MCS0	171	5855	0.54	0.88	93.10	4.03	7.60	11.63	≤ 20.00
11ax-HE20	MCS0	169	5845	5.81	5.76	97.04	8.93	7.60	16.53	≤ 20.00
11ax-HE20	MCS0	173	5865	5.33	5.27	97.04	8.44	7.60	16.04	≤ 20.00
11ax-HE20	MCS0	177	5885	5.86	5.80	97.04	8.97	7.60	16.57	≤ 20.00
11ax-HE40	MCS0	167	5835	3.04	2.80	95.63	6.12	7.60	13.72	≤ 20.00
11ax-HE40	MCS0	175	5875	3.33	3.30	95.63	6.52	7.60	14.12	≤ 20.00
11ax-HE80	MCS0	171	5855	0.61	0.89	92.45	4.10	7.60	11.70	≤ 20.00


Note 1: When EUT duty cycle < 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{ 10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} \} + 10 \cdot \log (1/\text{Duty cycle})$.

Note 2: EIRP PSD (dBm/MHz) = Total PSD (dBm/MHz) + Antenna Gain (dBi).


Note 3: For Channels span the 5.725-5.850 GHz and 5.850-5.895 GHz bands, we record the maximum level of 5.725-5.850 GHz and 5.850-5.895 GHz with RBW=1MHz, and the level complied with the 5.850-5.895 GHz EIRP PSD Limit.

802.11a Power Spectral Density - Ant 0


Channel 169 (5845MHz)

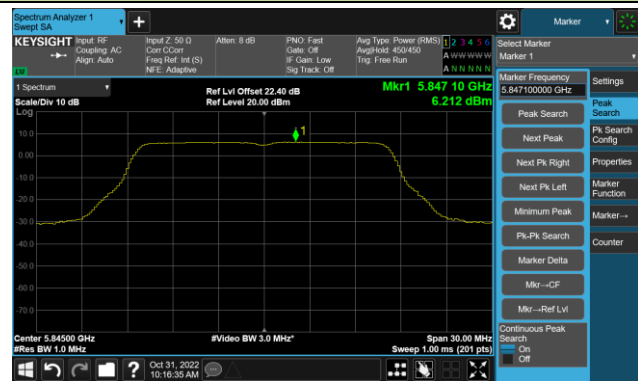

Channel 173 (5865MHz)

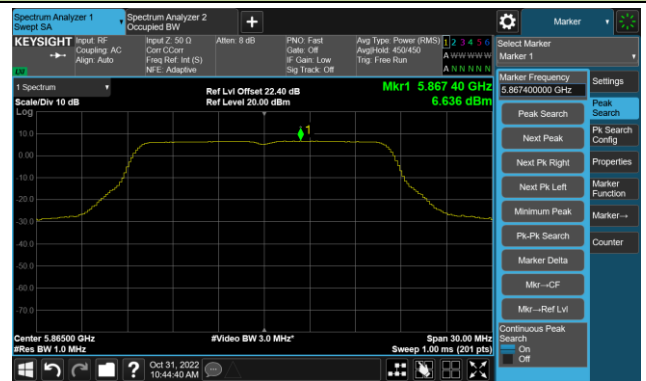

Channel 177 (5885MHz)

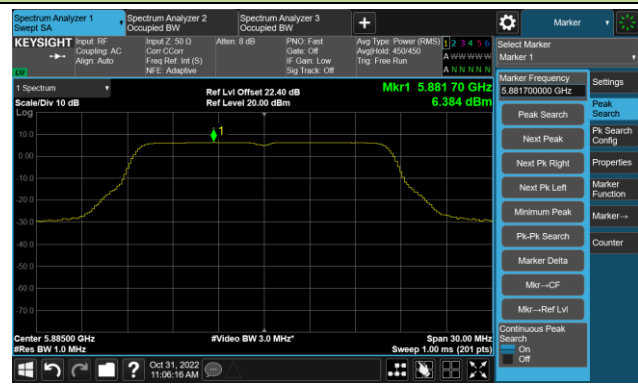


802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 169 (5845MHz)



Channel 173 (5865MHz)

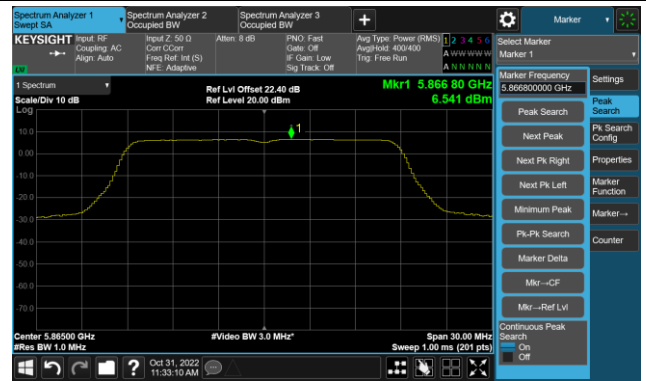


Channel 177 (5885MHz)

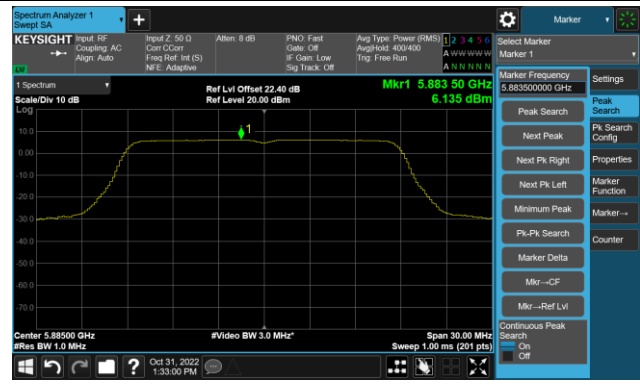


802.11ac-VHT40 Power Spectral Density - Ant 0

Channel 167 (5835MHz)

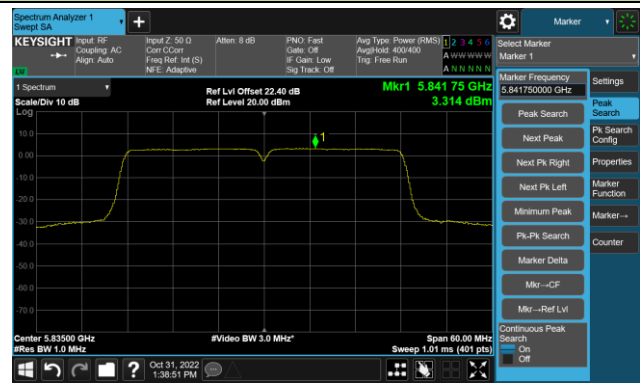

Channel 175 (5875MHz)

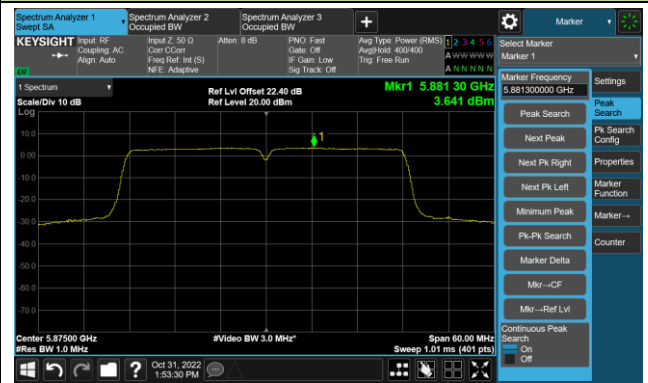


802.11ac-VHT80 Power Spectral Density - Ant 0

Channel 171 (5855MHz)



802.11ax-HE20 Power Spectral Density - Ant 0


Channel 169 (5845MHz)

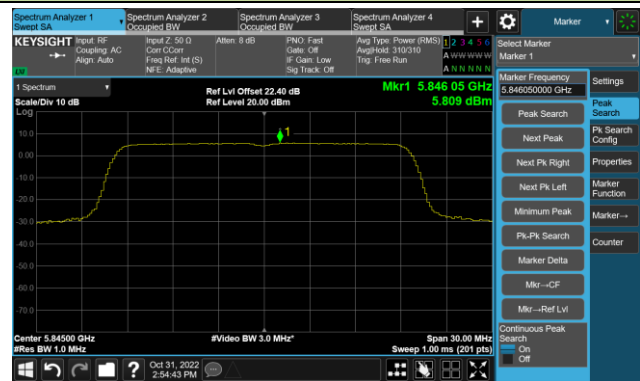

Channel 173 (5865MHz)



Channel 177 (5885MHz)

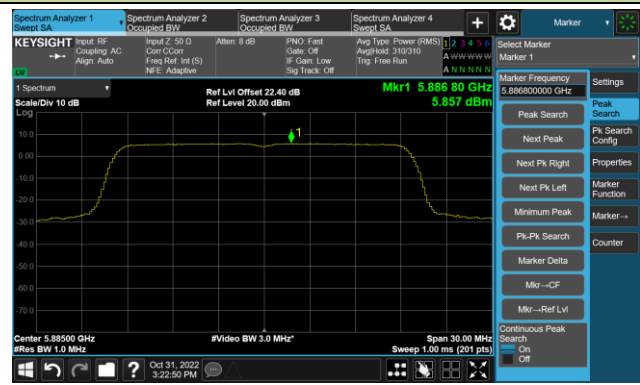

802.11 ax-HE40 Power Spectral Density - Ant 0

Channel 167 (5835MHz)




Channel 175 (5875MHz)



802.11 ax-HE80 Power Spectral Density - Ant 0

Channel 171 (5855MHz)

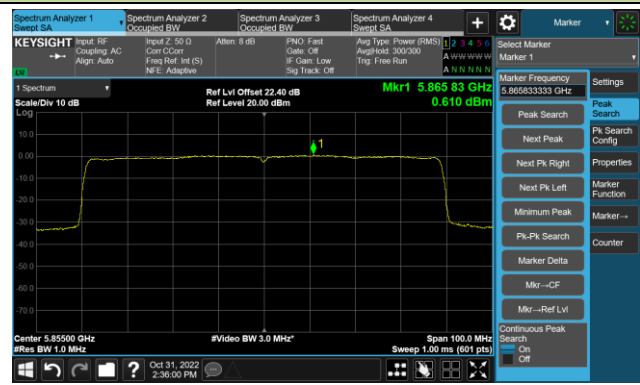


802.11a Power Spectral Density - Ant 1


Channel 169 (5845MHz)



Channel 173 (5865MHz)

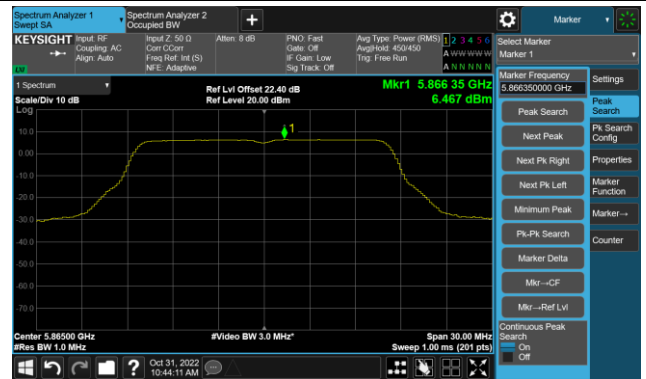


Channel 177 (5885MHz)

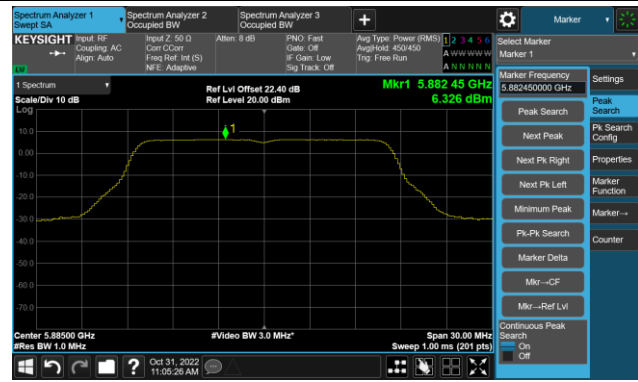


802.11ac-VHT20 Power Spectral Density - Ant 1

Channel 169 (5845MHz)

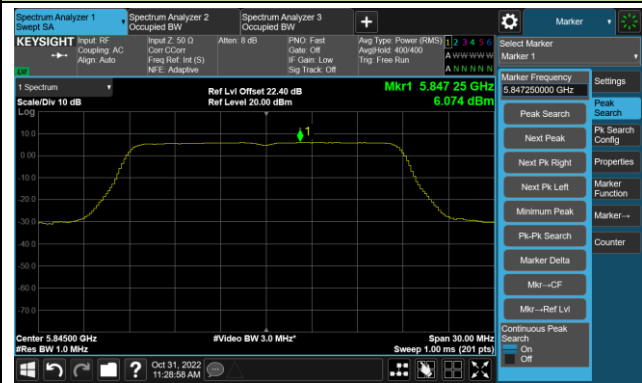

Channel 173 (5865MHz)

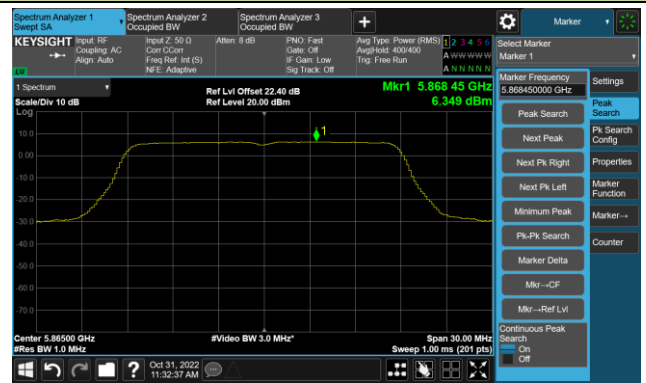


Channel 177 (5885MHz)




802.11ac-VHT40 Power Spectral Density - Ant 1

Channel 167 (5835MHz)

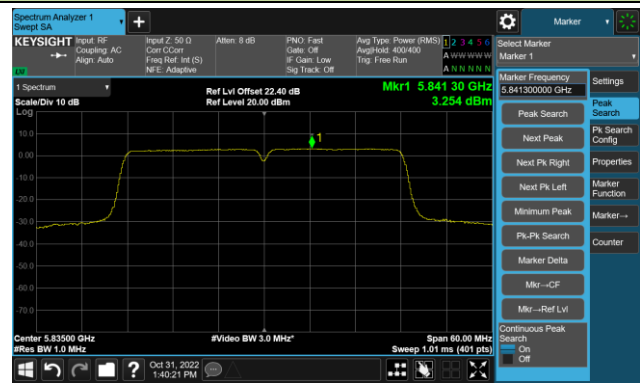

Channel 175 (5875MHz)

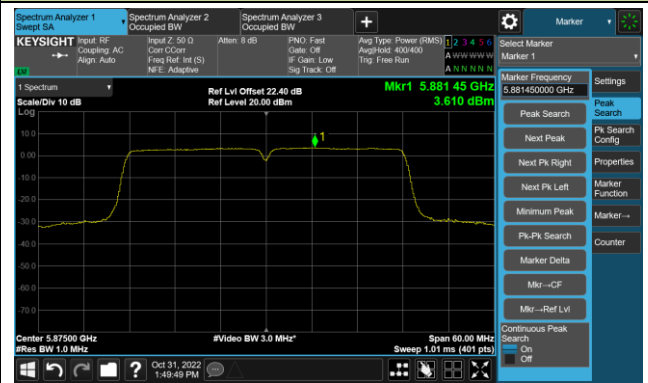

802.11ac-VHT80 Power Spectral Density - Ant 1

Channel 171 (5855MHz)

