


PART NUMBER BLOCK	
PART NUMBER	REV
4L.RAJBA.005	1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	RELEASE TO FILE	02/07/23	STAR YANG

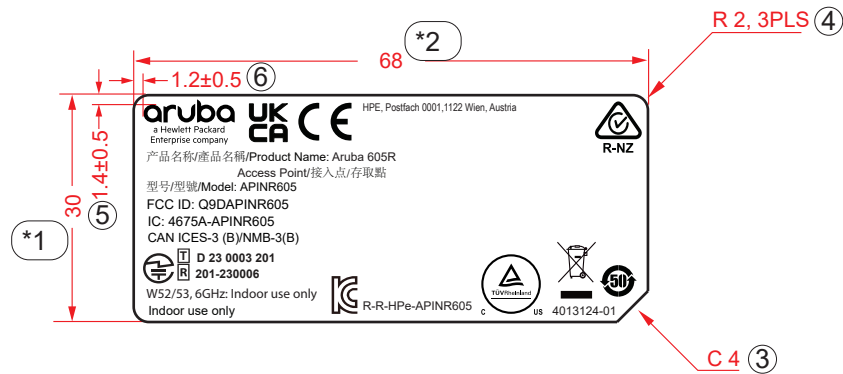

NOTES:

- MATERIAL: 50μ Polyester Film White Matt Label with Depressive Liner , 金利宝 HTYL 50(EB)-R2ZL
ADHESIVE: 网纹背胶
- COLOR:
 - COLOR OF BASE: WHITE
 - COLOR OF FONT: BLACK
- THICKNESS OF FACE STOCK: 0.052 ± 0.004
- THICKNESS OF ADHESIVE: 0.033 ± 0.003
- 卷状出货, 边距3±0.5mm, 跳距3±0.3mm
- UL Approved, PGJ12, CM-100T-030. 必须搭配碳带: Ricoh"B110A"/"B110CR"
- TEMPERATURE RESISTANT= 120°C.
- 原材料粘着力(180°Peel Adhesion): ≥1.7kgf/25mm
- TEST REQUIREMENT:

TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	ISO Class: 1 ASTM Class: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5% is affected.


UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE:			
INTEGRAL DIMENSIONS 1 PLACE DECIMAL	± 0.2 ± 0.2	ANGULAR DIMENSIONS	± 2° HOLES UNDER φ 5.00 ± 0.2
MATERIAL: SEE NOTES			
FINISH: SEE NOTES			
THIRD ANGLE PROJECTION	DRAWN	VERA ZHAO	02/07/23
	ENGR	VERA ZHAO	02/07/23
	APVD	STAR YANG	02/07/23

WNC 啟碁科技股份有限公司 Wistron NeWeb Corp.		20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726	
DWG TITLE LABEL, BASE AGENCY, 68*30MM, 4013124-01, RAJB-AB05-12			
SIZE A4	DWG NO. 4L.RAJBA.005	SCALE 1/1	REV 1
SHEET 1 OF 1		SHEET 1 OF 1	


NEXT ASSY	USED ON
APPLICATION	

PART NUMBER BLOCK	
PART NUMBER	REV
4L.RFKQA.001	1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	RELEASE TO FILE		



出标方向
↓

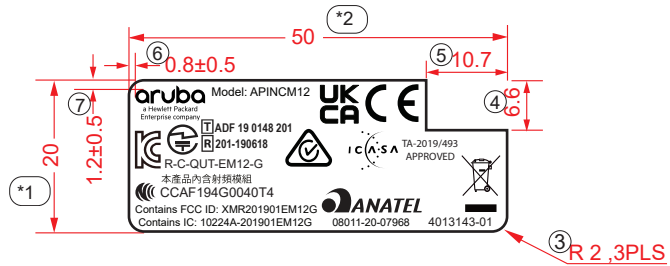

NOTES:

- MATERIAL: 50μ Polyester Film White Matt Label with Depressive Liner , 金利宝 HTYL 50(EB)-R2ZL
ADHESIVE: 网纹背胶
- COLOR:
 - COLOR OF BASE: WHITE
 - COLOR OF FONT: BLACK
- THICKNESS OF FACE STOCK: 0.052 ± 0.004
- THICKNESS OF ADHESIVE: 0.033 ± 0.003
- 卷状出货, 边距3±0.5mm, 跳距3±0.3mm
- UL Approved, PGIJ2, CM-100T-030. 必须搭配碳带: Ricoh"B110A"/"B110CR"
- TEMPERATURE RESISTANT= 120°C.
- 原材料粘着力(180°Peel Adhesion): ≥1.7kgf/25mm
- TEST REQUIREMENT:

TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	□□□□□ ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5 % is affected.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE:			
INTEGRAL DIMENSIONS ± 0.2 1 PLACE DECIMAL		ANGULAR DIMENSIONS ± 2° HOLES UNDER φ 5.00 ± 0.2	
MATERIAL: SEE NOTES			
FINISH: SEE NOTES			
THIRD ANGLE PROJECTION	DRAWN		
	ENGR		
	APVD		

WNC 啟碁科技股份有限公司		Wistron NeWeb Corp.	
20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726			
DWG TITLE		REV 1	
SIZE A4	DWG NO.	SCALE 1/1	SHEET 1 OF 1

NEXT ASSY	USED ON
APPLICATION	

AP605R12 Label Location-FRU

