



EUT Tx Waveform


802.11ax-HE20 / CH33

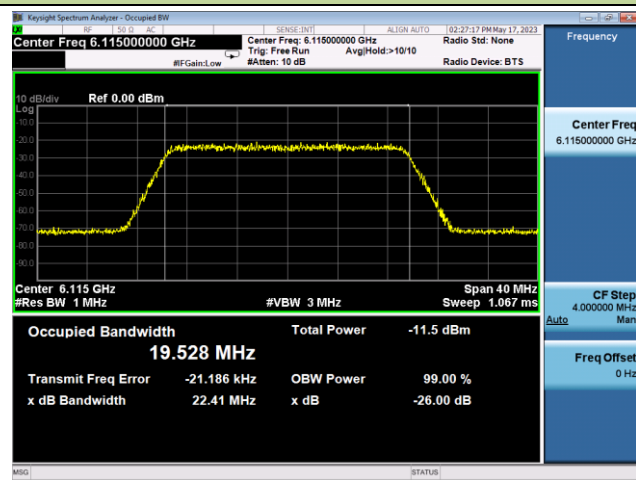


802.11ax-HE160 / CH47

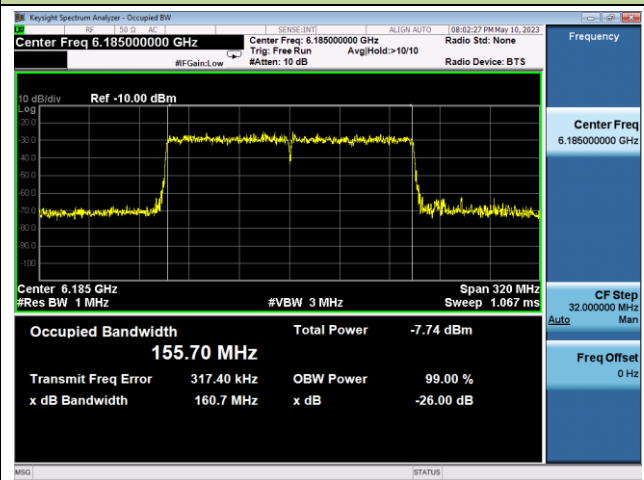


802.11ax-HE20 / CH97

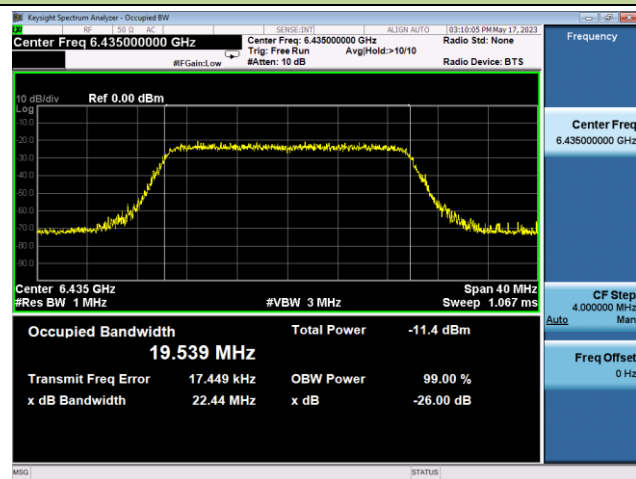


802.11ax-HE80 / CH103

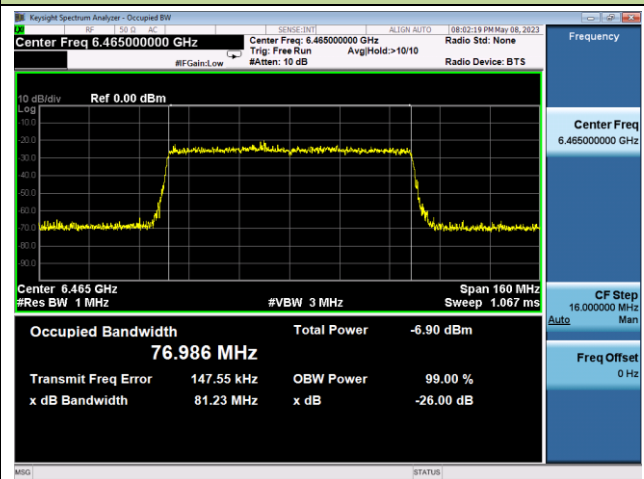


802.11ax-HE20 / CH153

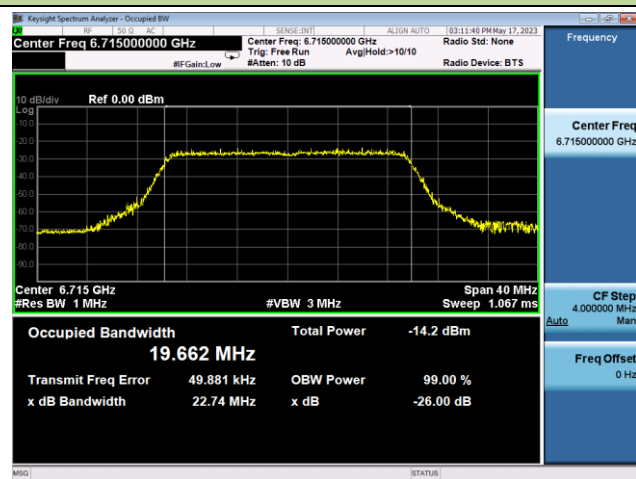


802.11ax-HE160 / CH143

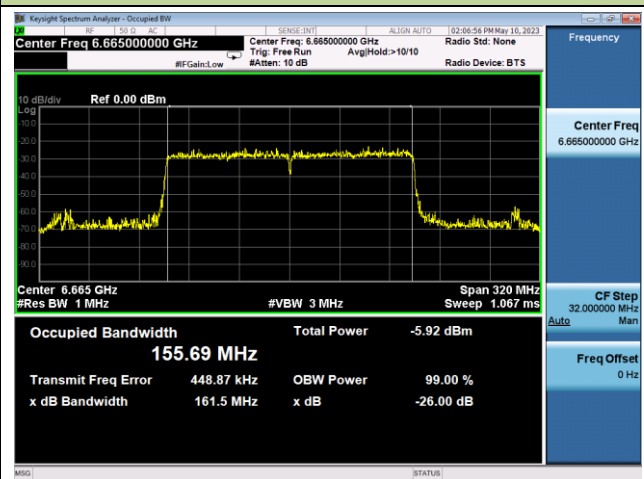

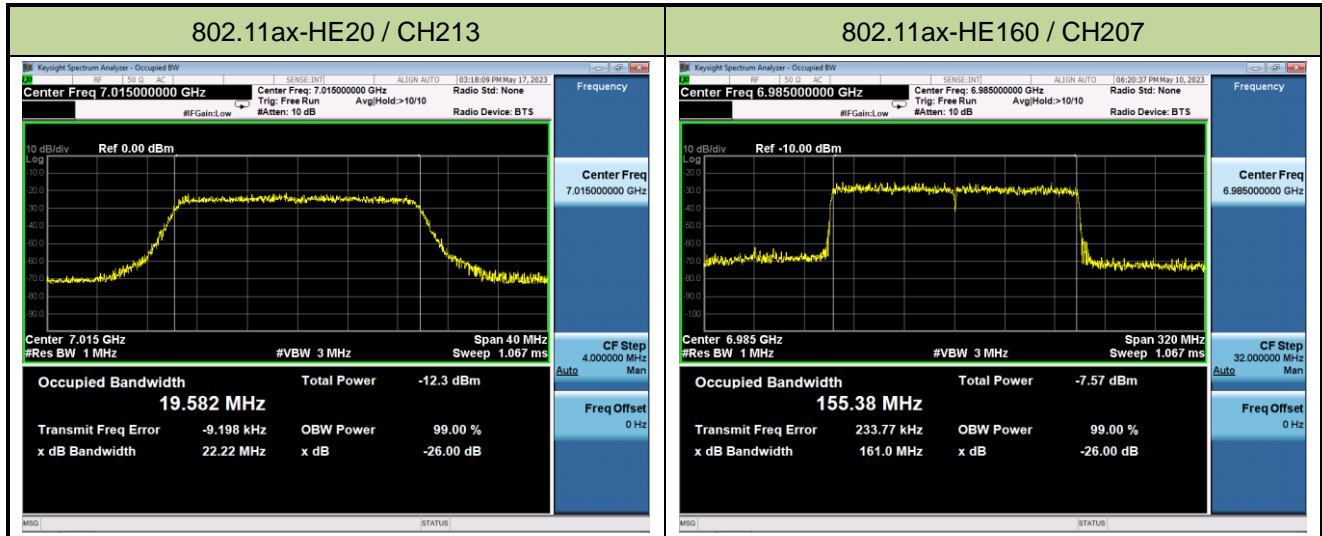


Incumbent Signal Calibration Plots (NII-5 Band)


802.11ax-HE20 / CH33

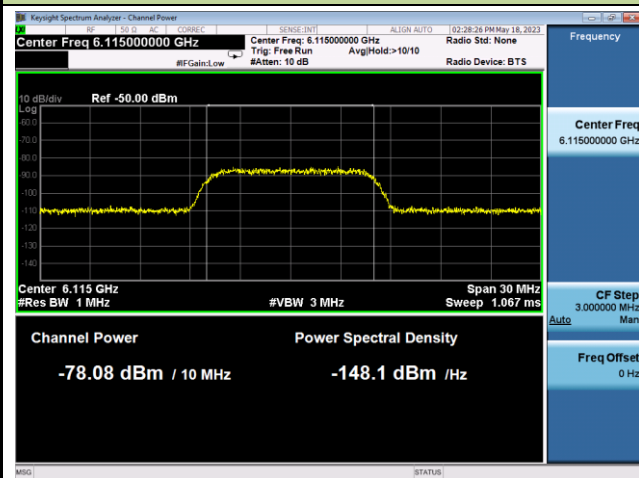


802.11ax-HE160 / CH47 (Low Edge)

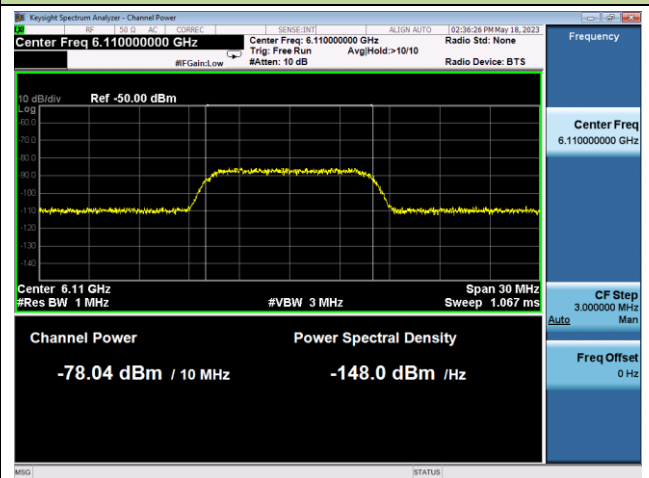

802.11ax-HE160 / CH47 (Middle)

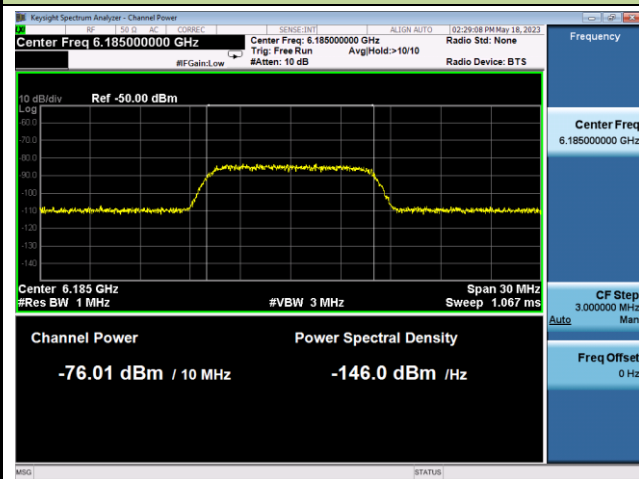



802.11ax-HE160 / CH47 (High Edge)

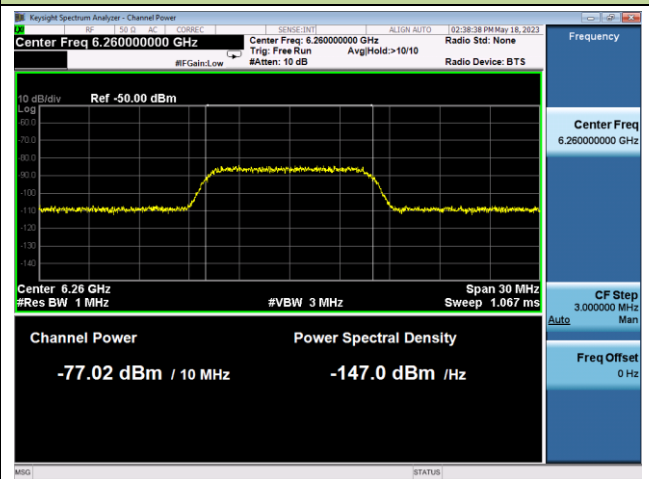

Incumbent Signal Calibration Plots (NII-6 Band)



802.11ax-HE20 / CH97

802.11ax-HE80 / CH103 (Low Edge)

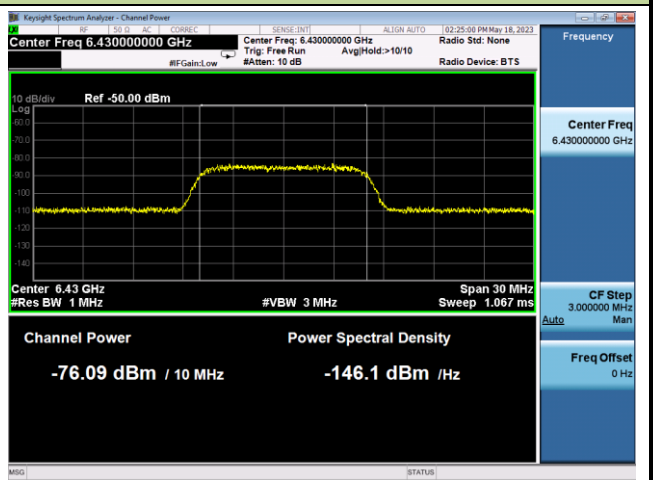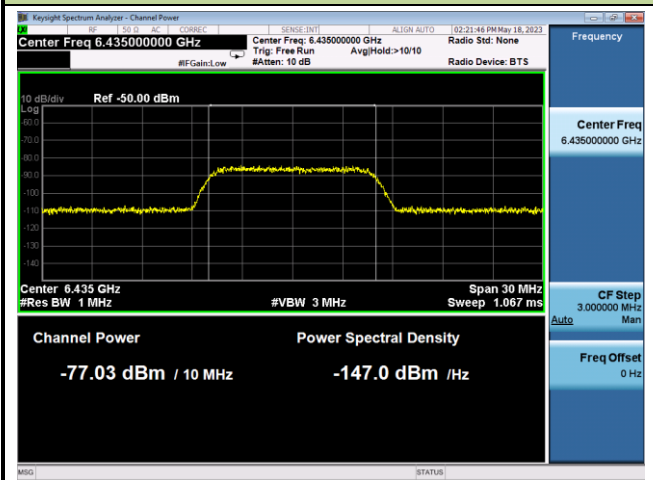


802.11ax-HE80 / CH103 (Middle)

802.11ax-HE80 / CH103 (High Edge)

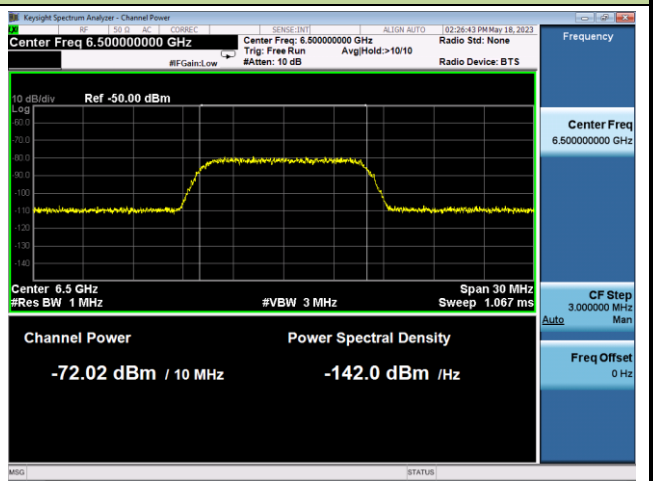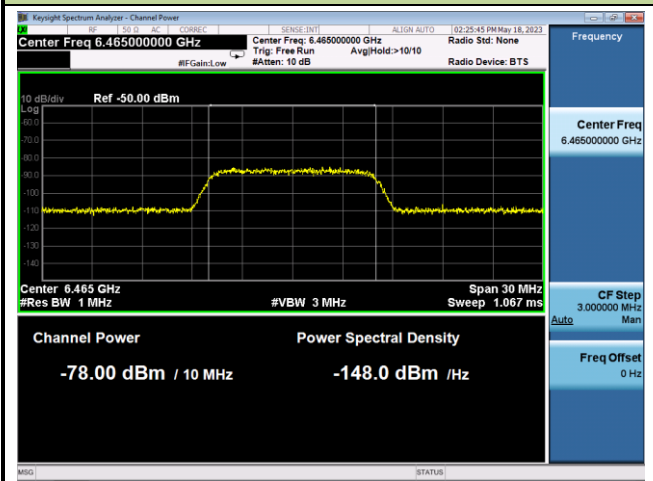


Incumbent Signal Calibration Plots (NII-7 Band)


802.11ax-HE20 / CH153

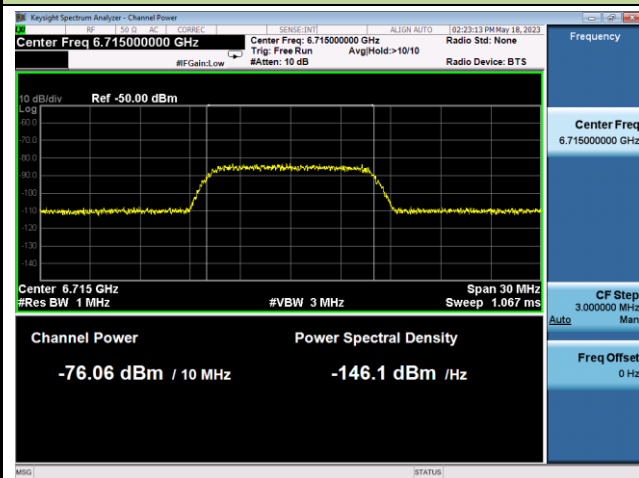


802.11ax-HE160 / CH143 (Low Edge)

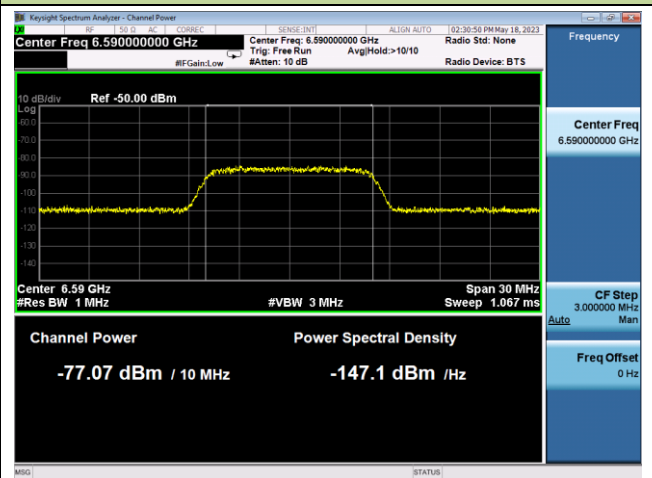

802.11ax-HE160 / CH143 (Middle)

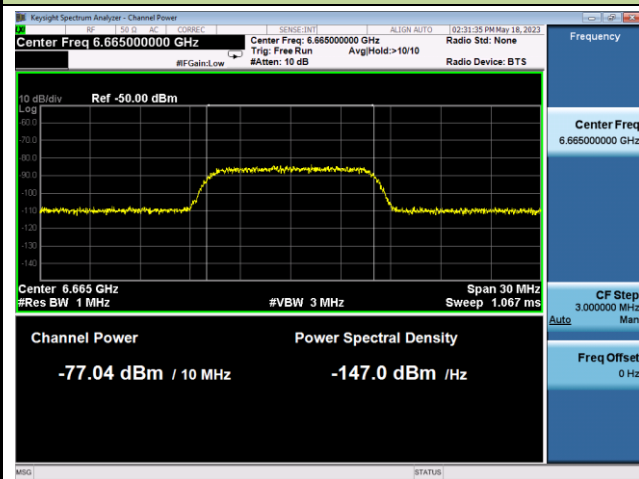


802.11ax-HE160 / CH143 (High Edge)

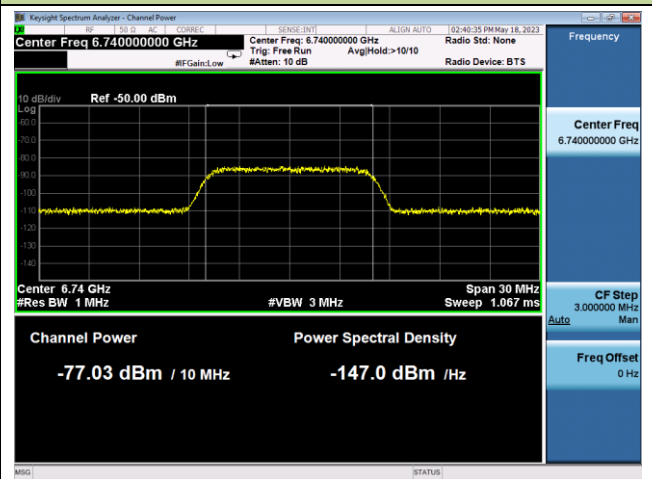


Incumbent Signal Calibration Plots (NII-8 Band)


802.11ax-HE20 / CH213

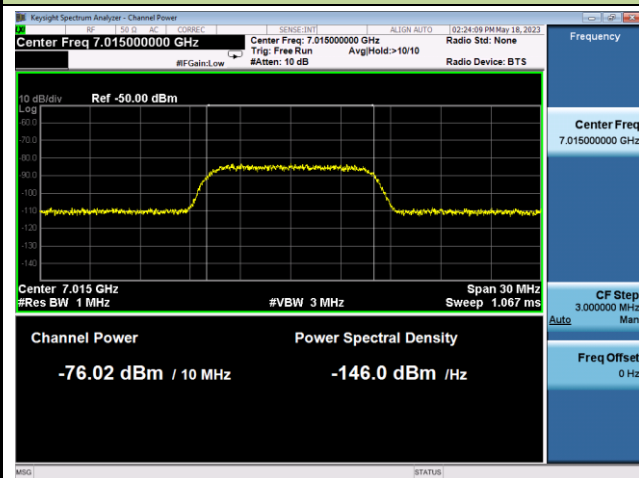

802.11ax-HE160 / CH207 (Low Edge)

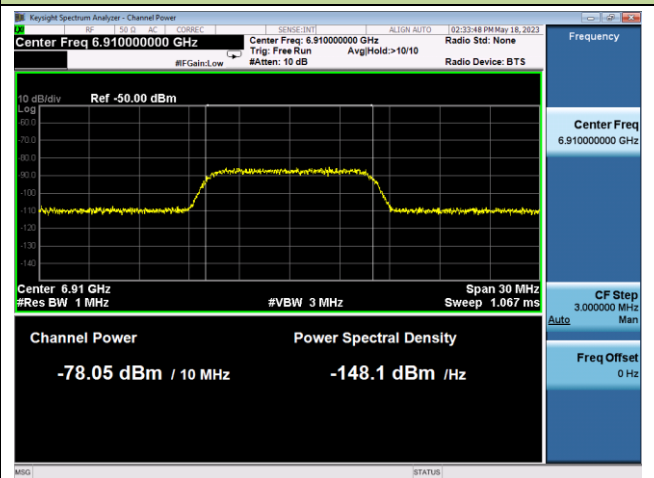

802.11ax-HE160 / CH207 (Middle)

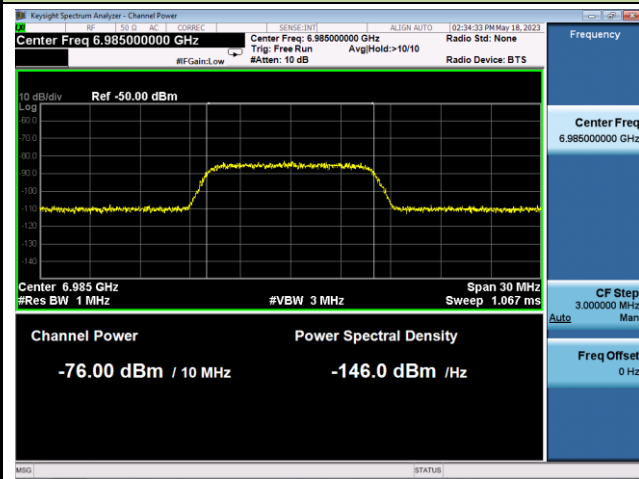


802.11ax-HE160 / CH207 (High Edge)




Test Result of EUT ceased transmission (NII-5 Band)


802.11ax-HE20 / CH33

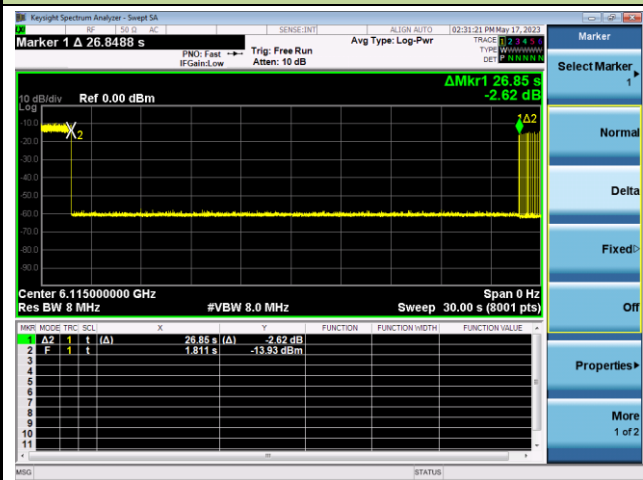

802.11ax-HE160 / CH47 (Low Edge)

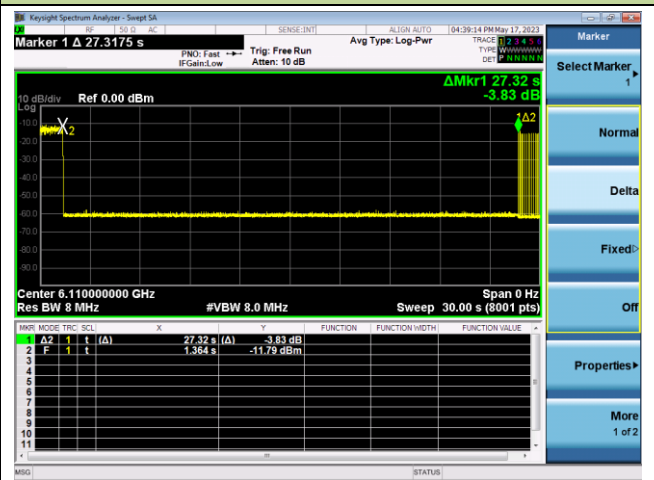

802.11ax-HE160 / CH47 (Middle)

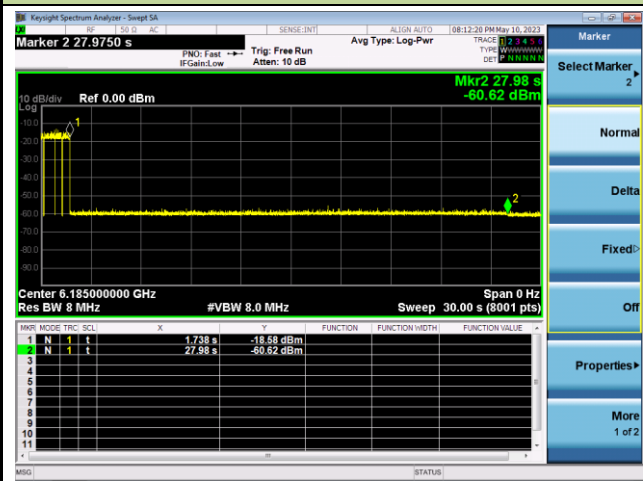


802.11ax-HE160 / CH47 (High Edge)




Test Result of EUT ceased transmission (NII-6 Band)


802.11ax-HE20 / CH97

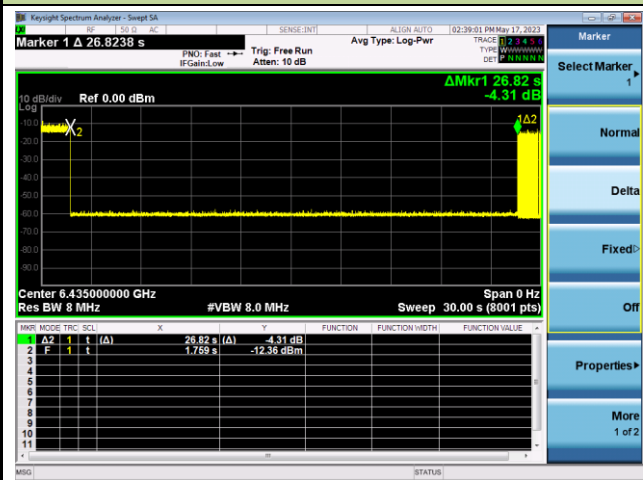


802.11ax-HE80 / CH103 (Low Edge)

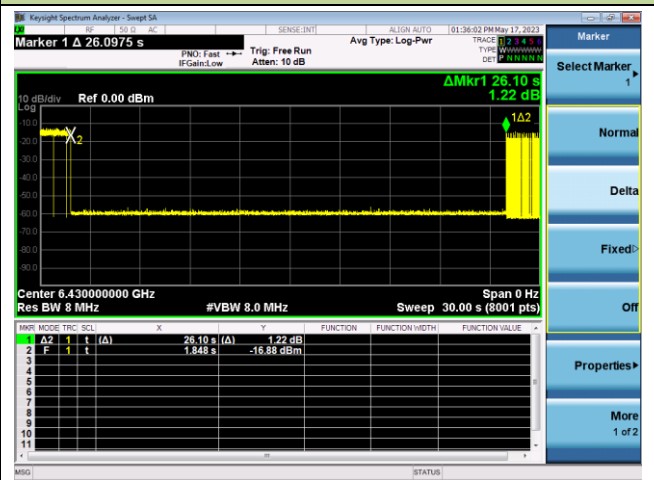

802.11ax-HE80 / CH103 (Middle)

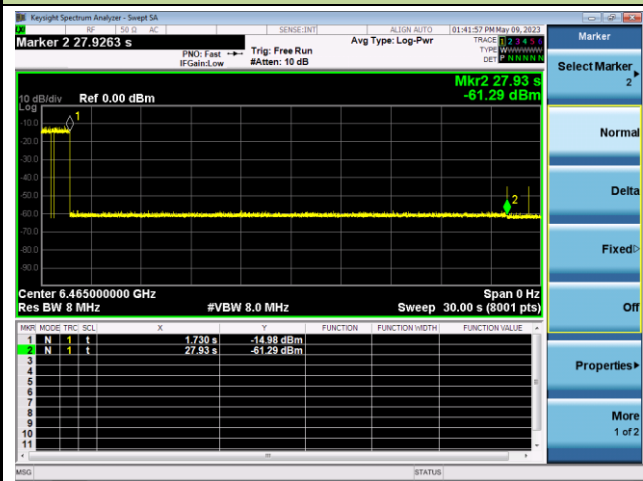


802.11ax-HE80 / CH103 (High Edge)

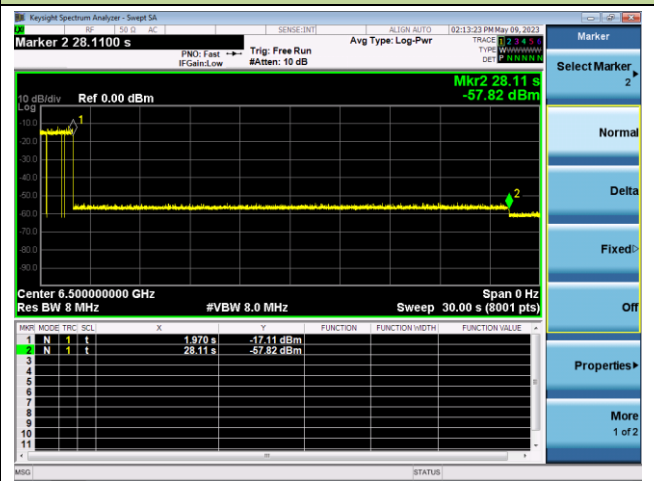

Test Result of EUT ceased transmission (NII-7 Band)


802.11ax-HE20 / CH153

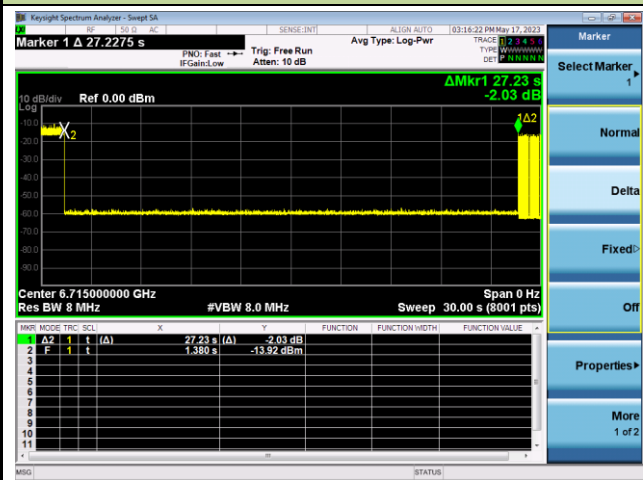


802.11ax-HE160 / CH143 (Low Edge)



802.11ax-HE160 / CH143 (Middle)

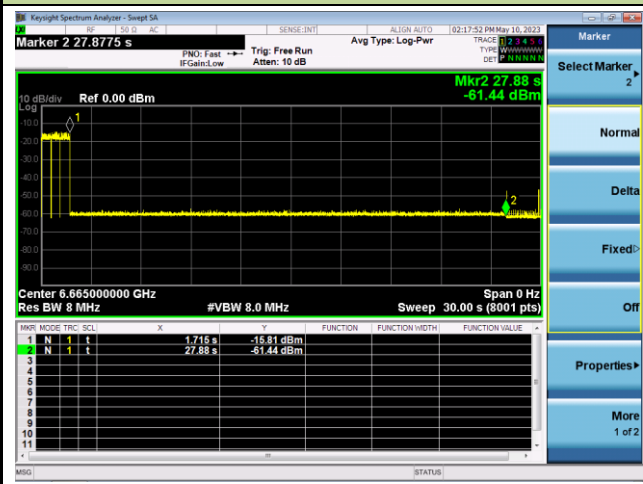


802.11ax-HE160 / CH143 (High Edge)

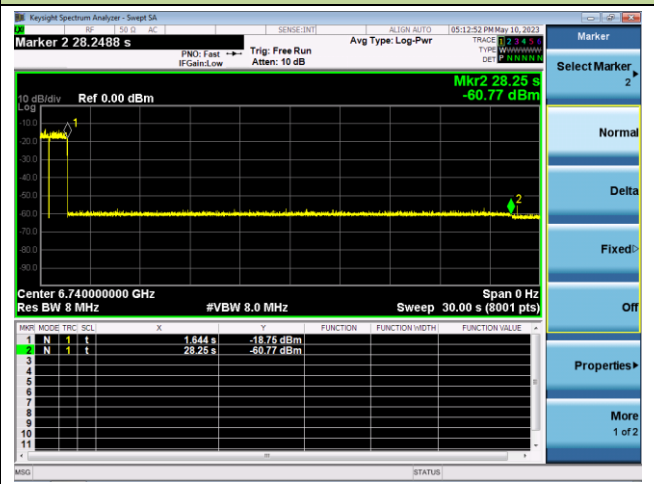


Test Result of EUT ceased transmission (NII-8 Band)


802.11ax-HE20 / CH213

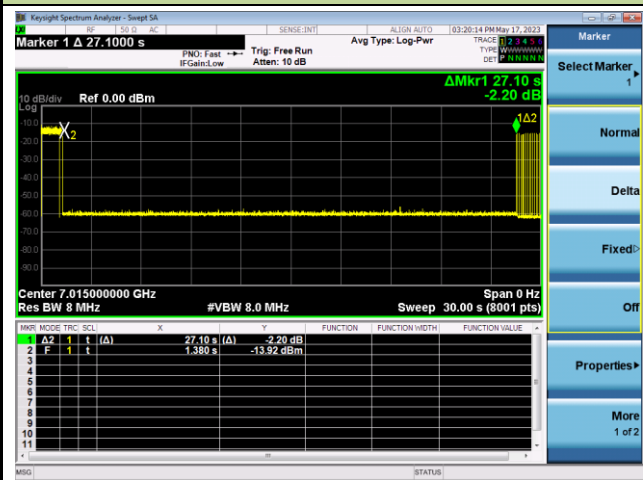


802.11ax-HE160 / CH207 (Low Edge)

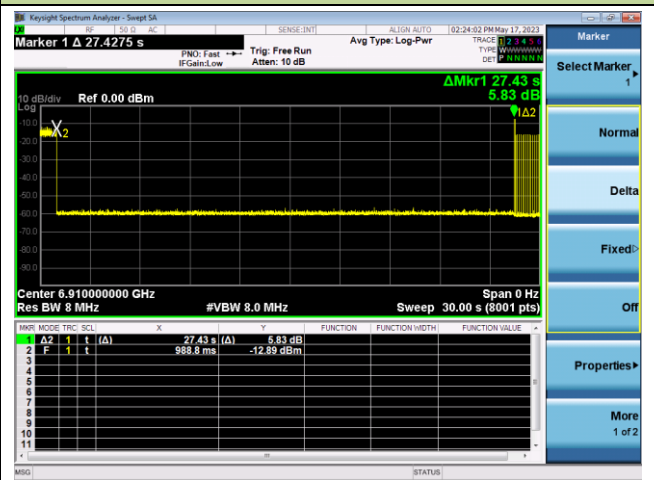

802.11ax-HE160 / CH207 (Middle)

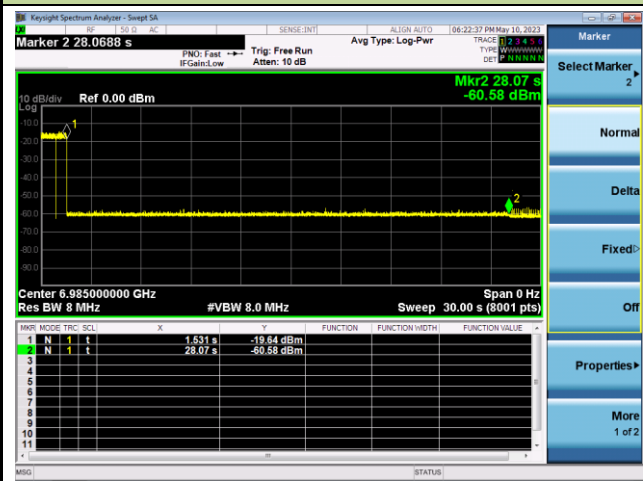

802.11ax-HE160 / CH207 (High Edge)

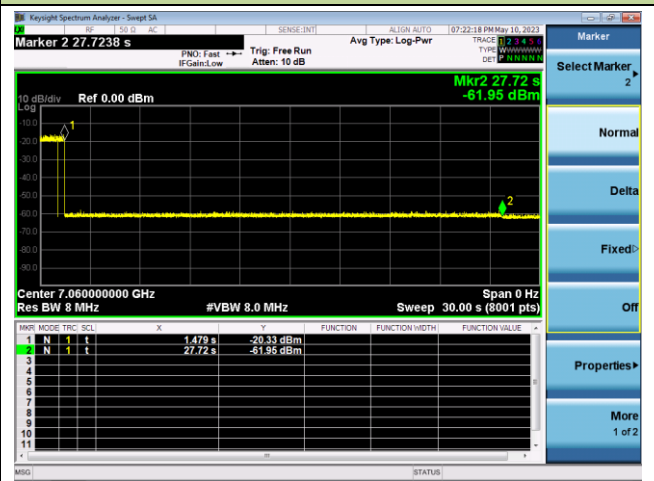

A.8 Radiated Spurious Emission Test Result

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=1)	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8769.0	32.0	13.2	45.3	88.2	-42.9	Peak	Horizontal
*	9857.0	33.0	14.3	47.3	88.2	-40.9	Peak	Horizontal
	11166.0	32.2	17.3	49.5	74.0	-24.5	Peak	Horizontal
	12194.5	30.9	17.6	48.5	74.0	-25.5	Peak	Horizontal
*	8743.5	32.5	13.1	45.6	88.2	-42.6	Peak	Vertical
*	9993.0	33.1	14.5	47.6	88.2	-40.6	Peak	Vertical
	11429.5	31.7	17.7	49.4	74.0	-24.6	Peak	Vertical
	12160.5	31.5	17.5	49.0	74.0	-25.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=1)	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8718.0	32.8	13.1	45.9	88.2	-42.3	Peak	Horizontal
*	10018.5	33.3	14.6	47.9	88.2	-40.3	Peak	Horizontal
	11268.0	31.9	17.6	49.5	74.0	-24.5	Peak	Horizontal
	12245.5	30.6	18.0	48.6	74.0	-25.4	Peak	Horizontal
*	8786.0	32.8	13.3	46.1	88.2	-42.1	Peak	Vertical
*	10248.0	33.6	15.2	48.8	88.2	-39.4	Peak	Vertical
	11506.0	31.9	17.7	49.6	74.0	-24.4	Peak	Vertical
	12254.0	30.8	18.0	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss = 1)	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8769.0	33.0	13.2	46.2	88.2	-42.0	Peak	Horizontal
*	9780.5	32.9	14.2	47.1	88.2	-41.1	Peak	Horizontal
	10979.0	31.7	17.4	49.1	74.0	-24.9	Peak	Horizontal
	11744.0	31.8	17.5	49.3	74.0	-24.7	Peak	Horizontal
*	8769.0	32.3	13.2	45.5	88.2	-42.7	Peak	Vertical
*	9908.0	33.8	14.1	47.9	88.2	-40.3	Peak	Vertical
	11217.0	31.1	17.8	48.9	74.0	-25.1	Peak	Vertical
	12228.5	31.0	17.7	48.7	74.0	-25.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=1)	Test Channel	97
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8777.5	32.2	13.3	45.5	88.2	-42.7	Peak	Horizontal
*	10231.0	31.4	15.0	46.4	88.2	-41.8	Peak	Horizontal
	11098.0	31.9	16.8	48.7	74.0	-25.3	Peak	Horizontal
	11871.5	31.1	17.1	48.2	74.0	-25.8	Peak	Horizontal
*	8888.0	32.2	13.4	45.6	88.2	-42.6	Peak	Vertical
*	10001.5	33.1	14.3	47.4	88.2	-40.8	Peak	Vertical
	11115.0	32.3	17.5	49.8	74.0	-24.2	Peak	Vertical
	11446.5	31.5	17.6	49.1	74.0	-24.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=1)	Test Channel	105
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8896.5	32.0	13.5	45.5	88.2	-42.7	Peak	Horizontal
*	9738.0	33.5	14.1	47.6	88.2	-40.6	Peak	Horizontal
	10902.5	32.0	17.3	49.3	74.0	-24.7	Peak	Horizontal
	11574.0	31.0	18.0	49.0	74.0	-25.0	Peak	Horizontal
*	8845.5	32.3	13.5	45.8	88.2	-42.4	Peak	Vertical
*	10231.0	33.7	15.0	48.7	88.2	-39.5	Peak	Vertical
	11242.5	31.4	17.5	48.9	74.0	-25.1	Peak	Vertical
	11786.5	31.6	17.3	48.9	74.0	-25.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=1)	Test Channel	113
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8828.5	31.5	13.4	44.9	88.2	-43.3	Peak	Horizontal
*	10248.0	32.5	15.2	47.7	88.2	-40.5	Peak	Horizontal
	11200.0	31.1	17.9	49.0	74.0	-25.0	Peak	Horizontal
	12220.0	31.2	17.6	48.8	74.0	-25.2	Peak	Horizontal
*	8743.5	32.2	13.1	45.3	88.2	-42.9	Peak	Vertical
*	9925.0	33.1	14.3	47.4	88.2	-40.8	Peak	Vertical
	10868.5	32.3	17.0	49.3	74.0	-24.7	Peak	Vertical
	11506.0	31.5	17.7	49.2	74.0	-24.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=1)	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8820.0	32.1	13.5	45.6	88.2	-42.6	Peak	Horizontal
*	9738.0	33.5	14.1	47.6	88.2	-40.6	Peak	Horizontal
	11106.5	33.0	17.2	50.2	74.0	-23.8	Peak	Horizontal
	12254.0	30.8	18.0	48.8	74.0	-25.2	Peak	Horizontal
*	8794.5	31.5	13.4	44.9	88.2	-43.3	Peak	Vertical
*	10256.5	32.8	15.1	47.9	88.2	-40.3	Peak	Vertical
	10681.5	32.9	16.3	49.2	74.0	-24.8	Peak	Vertical
	11812.0	31.5	17.4	48.9	74.0	-25.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=1)	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8803.0	32.6	13.4	46.0	88.2	-42.2	Peak	Horizontal
*	10350.0	32.0	15.6	47.6	88.2	-40.6	Peak	Horizontal
	11115.0	32.1	17.5	49.6	74.0	-24.4	Peak	Horizontal
	12143.5	30.6	17.5	48.1	74.0	-25.9	Peak	Horizontal
*	8803.0	32.6	13.4	46.0	88.2	-42.2	Peak	Vertical
*	9865.5	32.8	14.3	47.1	88.2	-41.1	Peak	Vertical
	11115.0	32.1	17.5	49.6	74.0	-24.4	Peak	Vertical
	12237.0	30.6	17.9	48.5	74.0	-25.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=1)	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8616.0	32.0	12.9	44.9	88.2	-43.3	Peak	Horizontal
*	9925.0	32.8	14.3	47.1	88.2	-41.1	Peak	Horizontal
	11242.5	33.2	17.5	50.7	74.0	-23.3	Peak	Horizontal
	12313.5	30.9	17.5	48.4	74.0	-25.6	Peak	Horizontal
*	8726.5	31.0	13.2	44.2	88.2	-44.0	Peak	Vertical
*	9942.0	33.2	14.6	47.8	88.2	-40.4	Peak	Vertical
	10698.5	33.4	16.6	50.0	74.0	-24.0	Peak	Vertical
	12254.0	31.5	18.0	49.5	74.0	-24.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=1)	Test Channel	185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8828.5	31.9	13.4	45.3	88.2	-42.9	Peak	Horizontal
*	10188.5	33.3	14.6	47.9	88.2	-40.3	Peak	Horizontal
	10783.5	32.0	17.0	49.0	74.0	-25.0	Peak	Horizontal
	11633.5	31.9	17.6	49.5	74.0	-24.5	Peak	Horizontal
*	8718.0	31.8	13.1	44.9	88.2	-43.3	Peak	Vertical
*	9891.0	33.8	14.2	48.0	88.2	-40.2	Peak	Vertical
	10843.0	31.8	17.3	49.1	74.0	-24.9	Peak	Vertical
	11514.5	31.4	17.6	49.0	74.0	-25.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=1)	Test Channel	189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8854.0	32.7	13.6	46.3	88.2	-41.9	Peak	Horizontal
*	10197.0	32.4	14.7	47.1	88.2	-41.1	Peak	Horizontal
	11200.0	31.4	17.9	49.3	74.0	-24.7	Peak	Horizontal
	12322.0	30.4	17.6	48.0	74.0	-26.0	Peak	Horizontal
*	8956.0	32.4	13.4	45.8	88.2	-42.4	Peak	Vertical
*	10248.0	33.5	15.2	48.7	88.2	-39.5	Peak	Vertical
	10953.5	32.5	16.8	49.3	74.0	-24.7	Peak	Vertical
	11744.0	31.5	17.5	49.0	74.0	-25.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=1)	Test Channel	213
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8633.0	32.2	12.9	45.1	88.2	-43.1	Peak	Horizontal
*	10035.5	33.2	14.4	47.6	88.2	-40.6	Peak	Horizontal
	10809.0	32.0	17.3	49.3	74.0	-24.7	Peak	Horizontal
	11455.0	31.6	17.3	48.9	74.0	-25.1	Peak	Horizontal
*	8939.0	32.2	13.4	45.6	88.2	-42.6	Peak	Vertical
*	9823.0	33.4	14.2	47.6	88.2	-40.6	Peak	Vertical
	10732.5	31.1	16.5	47.6	74.0	-26.4	Peak	Vertical
	11829.0	31.4	17.1	48.5	74.0	-25.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=1)	Test Channel	229
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8845.5	31.9	13.5	45.4	88.2	-42.8	Peak	Horizontal
*	10231.0	33.0	15.0	48.0	88.2	-40.2	Peak	Horizontal
	10707.0	33.0	16.5	49.5	74.0	-24.5	Peak	Horizontal
	12135.0	31.8	17.3	49.1	74.0	-24.9	Peak	Horizontal
*	8939.0	32.1	13.4	45.5	88.2	-42.7	Peak	Vertical
*	10333.0	33.1	15.7	48.8	88.2	-39.4	Peak	Vertical
	11106.5	32.5	17.2	49.7	74.0	-24.3	Peak	Vertical
	11650.5	31.5	17.7	49.2	74.0	-24.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE40 (Nss=1)	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8913.5	31.9	13.6	45.5	88.2	-42.7	Peak	Horizontal
*	10027.0	32.7	14.6	47.3	88.2	-40.9	Peak	Horizontal
	11293.5	31.9	17.8	49.7	74.0	-24.3	Peak	Horizontal
	12415.5	31.3	17.0	48.3	74.0	-25.7	Peak	Horizontal
*	8777.5	31.6	13.3	44.9	88.2	-43.3	Peak	Vertical
*	10290.5	32.7	15.2	47.9	88.2	-40.3	Peak	Vertical
	11174.5	31.7	17.3	49.0	74.0	-25.0	Peak	Vertical
	11684.5	31.0	17.4	48.4	74.0	-25.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE40 (Nss=1)	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8820.0	31.9	13.5	45.4	88.2	-42.8	Peak	Horizontal
*	9840.0	32.7	14.1	46.8	88.2	-41.4	Peak	Horizontal
	11276.5	31.2	17.9	49.1	74.0	-24.9	Peak	Horizontal
	12160.5	30.8	17.5	48.3	74.0	-25.7	Peak	Horizontal
*	8786.0	31.3	13.3	44.6	88.2	-43.6	Peak	Vertical
*	10188.5	33.9	14.6	48.5	88.2	-39.7	Peak	Vertical
	10987.5	31.5	17.3	48.8	74.0	-25.2	Peak	Vertical
	11591.0	30.7	17.7	48.4	74.0	-25.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE40 (Nss=1)	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8786.0	32.2	13.3	45.5	88.2	-42.7	Peak	Horizontal
*	10248.0	33.1	15.2	48.3	88.2	-39.9	Peak	Horizontal
	10809.0	32.3	17.3	49.6	74.0	-24.4	Peak	Horizontal
	11438.0	32.0	17.7	49.7	74.0	-24.3	Peak	Horizontal
*	8726.5	32.3	13.2	45.5	88.2	-42.7	Peak	Vertical
*	10214.0	32.3	14.7	47.0	88.2	-41.2	Peak	Vertical
	11208.5	31.8	17.8	49.6	74.0	-24.4	Peak	Vertical
	12135.0	31.2	17.3	48.5	74.0	-25.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE40 (Nss=1)	Test Channel	99
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8743.5	31.9	13.1	45.0	88.2	-43.2	Peak	Horizontal
*	9925.0	33.6	14.3	47.9	88.2	-40.3	Peak	Horizontal
	10775.0	31.6	17.1	48.7	74.0	-25.3	Peak	Horizontal
	11769.5	32.1	16.9	49.0	74.0	-25.0	Peak	Horizontal
*	8624.5	32.2	12.9	45.1	88.2	-43.1	Peak	Vertical
*	10256.5	32.6	15.1	47.7	88.2	-40.5	Peak	Vertical
	10979.0	32.2	17.4	49.6	74.0	-24.4	Peak	Vertical
	12262.5	31.0	17.7	48.7	74.0	-25.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE40 (Nss=1)	Test Channel	107
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8760.5	31.9	13.2	45.1	88.2	-43.1	Peak	Horizontal
*	10528.5	32.5	16.1	48.6	88.2	-39.6	Peak	Horizontal
	10979.0	31.4	17.4	48.8	74.0	-25.2	Peak	Horizontal
	12313.5	30.5	17.5	48.0	74.0	-26.0	Peak	Horizontal
*	8769.0	31.3	13.2	44.5	88.2	-43.7	Peak	Vertical
*	10299.0	32.5	15.4	47.9	88.2	-40.3	Peak	Vertical
	10996.0	31.8	17.3	49.1	74.0	-24.9	Peak	Vertical
	11438.0	31.7	17.7	49.4	74.0	-24.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE40 (Nss=1)	Test Channel	115
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8777.5	31.8	13.3	45.1	88.2	-43.1	Peak	Horizontal
*	9661.5	33.6	13.9	47.5	88.2	-40.7	Peak	Horizontal
	10911.0	31.8	17.6	49.4	74.0	-24.6	Peak	Horizontal
	11659.0	31.2	17.8	49.0	74.0	-25.0	Peak	Horizontal
*	8760.5	32.0	13.2	45.2	88.2	-43.0	Peak	Vertical
*	10103.5	32.7	14.4	47.1	88.2	-41.1	Peak	Vertical
	11200.0	31.0	17.9	48.9	74.0	-25.1	Peak	Vertical
	11735.5	31.1	17.5	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-04-15
Test Mode	802.11ax-HE40 (Nss=1)	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10027.0	35.0	14.2	49.2	88.2	-39.0	Peak	Horizontal
*	10460.5	33.8	15.6	49.4	88.2	-38.8	Peak	Horizontal
	10902.5	33.0	17.0	50.0	74.0	-24.0	Peak	Horizontal
	11888.5	33.4	17.1	50.5	74.0	-23.5	Peak	Horizontal
*	9993.0	35.3	14.0	49.3	88.2	-38.9	Peak	Vertical
*	10494.5	34.7	15.5	50.2	88.2	-38.0	Peak	Vertical
	10826.0	33.4	16.8	50.2	74.0	-23.8	Peak	Vertical
	11574.0	33.4	17.7	51.1	74.0	-22.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE40 (Nss=1)	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8718.0	32.0	13.1	45.1	88.2	-43.1	Peak	Horizontal
*	10486.0	33.1	15.9	49.0	88.2	-39.2	Peak	Horizontal
	11115.0	31.5	17.5	49.0	74.0	-25.0	Peak	Horizontal
	11557.0	31.5	17.4	48.9	74.0	-25.1	Peak	Horizontal
*	8854.0	32.2	13.6	45.8	88.2	-42.4	Peak	Vertical
*	9976.0	32.7	14.6	47.3	88.2	-40.9	Peak	Vertical
	10775.0	32.1	17.1	49.2	74.0	-24.8	Peak	Vertical
	11701.5	31.0	17.5	48.5	74.0	-25.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-04-15
Test Mode	802.11ax-HE40 (Nss=1)	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9559.5	35.1	13.5	48.6	88.2	-39.6	Peak	Horizontal
*	10367.0	34.7	15.2	49.9	88.2	-38.3	Peak	Horizontal
	10817.5	33.9	16.8	50.7	74.0	-23.3	Peak	Horizontal
	11412.5	32.9	17.3	50.2	74.0	-23.8	Peak	Horizontal
*	9721.0	34.4	13.8	48.2	88.2	-40.0	Peak	Vertical
*	10452.0	34.0	15.6	49.6	88.2	-38.6	Peak	Vertical
	10800.5	33.4	16.7	50.1	74.0	-23.9	Peak	Vertical
	12313.5	32.5	17.6	50.1	74.0	-23.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE40 (Nss=1)	Test Channel	187
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8709.5	32.5	12.9	45.4	88.2	-42.8	Peak	Horizontal
*	10273.5	32.9	15.1	48.0	88.2	-40.2	Peak	Horizontal
	10834.5	31.7	17.5	49.2	74.0	-24.8	Peak	Horizontal
	11115.0	31.8	17.5	49.3	74.0	-24.7	Peak	Horizontal
*	8930.5	32.7	13.5	46.2	88.2	-42.0	Peak	Vertical
*	10579.5	33.0	16.0	49.0	88.2	-39.2	Peak	Vertical
	10987.5	31.6	17.3	48.9	74.0	-25.1	Peak	Vertical
	12262.5	30.6	17.7	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-04-15
Test Mode	802.11ax-HE40 (Nss=1)	Test Channel	195
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9721.0	35.1	13.8	48.9	88.2	-39.3	Peak	Horizontal
*	10333.0	34.8	15.4	50.2	88.2	-38.0	Peak	Horizontal
	10843.0	34.0	16.7	50.7	74.0	-23.3	Peak	Horizontal
	11506.0	32.8	17.6	50.4	74.0	-23.6	Peak	Horizontal
*	9755.0	34.9	13.6	48.5	88.2	-39.7	Peak	Vertical
*	10341.5	34.2	15.2	49.4	88.2	-38.8	Peak	Vertical
	11106.5	33.1	16.7	49.8	74.0	-24.2	Peak	Vertical
	11591.0	32.6	17.6	50.2	74.0	-23.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE40 (Nss=1)	Test Channel	211
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8786.0	32.4	13.3	45.7	88.2	-42.5	Peak	Horizontal
*	10171.5	32.7	14.5	47.2	88.2	-41.0	Peak	Horizontal
	10928.0	32.1	17.0	49.1	74.0	-24.9	Peak	Horizontal
	12262.5	30.8	17.7	48.5	74.0	-25.5	Peak	Horizontal
*	8786.0	31.9	13.3	45.2	88.2	-43.0	Peak	Vertical
*	10265.0	33.6	15.1	48.7	88.2	-39.5	Peak	Vertical
	10826.0	32.0	17.6	49.6	74.0	-24.4	Peak	Vertical
	11701.5	31.9	17.5	49.4	74.0	-24.6	Average	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE40 (Nss=1)	Test Channel	227
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8709.5	32.8	12.9	45.7	88.2	-42.5	Peak	Horizontal
*	9967.5	33.1	14.5	47.6	88.2	-40.6	Peak	Horizontal
	10834.5	31.7	17.5	49.2	74.0	-24.8	Peak	Horizontal
	11633.5	32.2	17.6	49.8	74.0	-24.2	Peak	Horizontal
*	8811.5	30.0	13.5	43.5	88.2	-44.7	Peak	Vertical
*	9848.5	33.3	14.2	47.5	88.2	-40.7	Peak	Vertical
	10996.0	31.3	17.3	48.6	74.0	-25.4	Peak	Vertical
	11565.5	30.8	17.8	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE80 (Nss=1)	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8752.0	31.8	13.1	44.9	88.2	-43.3	Peak	Horizontal
*	10265.0	33.1	15.1	48.2	88.2	-40.0	Peak	Horizontal
	10987.5	31.8	17.3	49.1	74.0	-24.9	Peak	Horizontal
	11514.5	31.6	17.6	49.2	74.0	-24.8	Peak	Horizontal
*	8726.5	32.4	13.2	45.6	88.2	-42.6	Peak	Vertical
*	10248.0	33.0	15.2	48.2	88.2	-40.0	Peak	Vertical
	10826.0	31.9	17.6	49.5	74.0	-24.5	Peak	Vertical
	11735.5	31.7	17.5	49.2	74.0	-24.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE80 (Nss=1)	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8760.5	32.6	13.2	45.8	88.2	-42.4	Peak	Horizontal
*	10511.5	33.2	16.0	49.2	88.2	-39.0	Peak	Horizontal
	11089.5	31.9	16.9	48.8	74.0	-25.2	Peak	Horizontal
	11565.5	31.3	17.8	49.1	74.0	-24.9	Peak	Horizontal
*	8871.0	32.8	13.3	46.1	88.2	-42.1	Peak	Vertical
*	10239.5	32.9	15.1	48.0	88.2	-40.2	Peak	Vertical
	10851.5	31.8	17.1	48.9	74.0	-25.1	Peak	Vertical
	11514.5	31.5	17.6	49.1	74.0	-24.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE80 (Nss=1)	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8752.0	32.1	13.1	45.2	88.2	-43.0	Peak	Horizontal
*	9865.5	34.0	14.3	48.3	88.2	-39.9	Peak	Horizontal
	10987.5	32.0	17.3	49.3	74.0	-24.7	Peak	Horizontal
	12279.5	31.7	17.2	48.9	74.0	-25.1	Peak	Horizontal
*	8947.5	31.7	13.4	45.1	88.2	-43.1	Peak	Vertical
*	10503.0	32.5	15.9	48.4	88.2	-39.8	Peak	Vertical
	10826.0	31.2	17.6	48.8	74.0	-25.2	Peak	Vertical
	11718.5	31.3	17.5	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE80 (Nss=1)	Test Channel	103
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8854.0	31.8	13.6	45.4	88.2	-42.8	Peak	Horizontal
*	10214.0	33.6	14.7	48.3	88.2	-39.9	Peak	Horizontal
	11030.0	32.1	17.0	49.1	74.0	-24.9	Peak	Horizontal
	11531.5	32.0	17.4	49.4	74.0	-24.6	Peak	Horizontal
*	8607.5	33.3	12.7	46.0	88.2	-42.2	Peak	Vertical
*	10435.0	32.3	16.1	48.4	88.2	-39.8	Peak	Vertical
	10996.0	31.7	17.3	49.0	74.0	-25.0	Peak	Vertical
	12177.5	32.0	17.3	49.3	74.0	-24.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE80 (Nss=1)	Test Channel	119
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8718.0	33.1	13.1	46.2	88.2	-42.0	Peak	Horizontal
*	9806.0	33.9	14.2	48.1	88.2	-40.1	Peak	Horizontal
	10860.0	32.1	17.0	49.1	74.0	-24.9	Peak	Horizontal
	11463.5	32.3	17.2	49.5	74.0	-24.5	Peak	Horizontal
*	8624.5	32.3	12.9	45.2	88.2	-43.0	Peak	Vertical
*	10554.0	32.3	16.0	48.3	88.2	-39.9	Peak	Vertical
	10987.5	32.2	17.3	49.5	74.0	-24.5	Peak	Vertical
	11574.0	31.5	18.0	49.5	74.0	-24.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE80 (Nss=1)	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8607.5	32.6	12.7	45.3	88.2	-42.9	Peak	Horizontal
*	9925.0	33.5	14.3	47.8	88.2	-40.4	Peak	Horizontal
	10834.5	32.4	17.5	49.9	74.0	-24.1	Peak	Horizontal
	11616.5	31.7	17.6	49.3	74.0	-24.7	Peak	Horizontal
*	8752.0	33.0	13.1	46.1	88.2	-42.1	Peak	Vertical
*	9738.0	33.6	14.1	47.7	88.2	-40.5	Peak	Vertical
	11268.0	32.3	17.6	49.9	74.0	-24.1	Peak	Vertical
	11973.5	31.6	17.0	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE80 (Nss=1)	Test Channel	183
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8590.5	32.7	12.5	45.2	88.2	-43.0	Peak	Horizontal
*	10010.0	33.6	14.4	48.0	88.2	-40.2	Peak	Horizontal
	10868.5	32.3	17.0	49.3	74.0	-24.7	Peak	Horizontal
	11599.5	32.2	17.7	49.9	74.0	-24.1	Peak	Horizontal
*	8794.5	32.1	13.4	45.5	88.2	-42.7	Peak	Vertical
*	9984.5	33.3	14.6	47.9	88.2	-40.3	Peak	Vertical
	10996.0	32.0	17.3	49.3	74.0	-24.7	Peak	Vertical
	12254.0	31.7	18.0	49.7	74.0	-24.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE80 (Nss=1)	Test Channel	199
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8735.0	32.0	13.2	45.2	88.2	-43.0	Peak	Horizontal
*	10537.0	33.0	16.0	49.0	88.2	-39.2	Peak	Horizontal
	11208.5	32.9	17.8	50.7	74.0	-23.3	Peak	Horizontal
	11650.5	31.8	17.7	49.5	74.0	-24.5	Peak	Horizontal
*	8854.0	32.8	13.6	46.4	88.2	-41.8	Peak	Vertical
*	10044.0	33.6	14.2	47.8	88.2	-40.4	Peak	Vertical
	10834.5	31.7	17.5	49.2	74.0	-24.8	Peak	Vertical
	11820.5	31.8	17.2	49.0	74.0	-25.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE80 (Nss=1)	Test Channel	215
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8726.5	32.5	13.2	45.7	88.2	-42.5	Peak	Horizontal
*	10248.0	33.8	15.2	49.0	88.2	-39.2	Peak	Horizontal
	11225.5	32.0	17.5	49.5	74.0	-24.5	Peak	Horizontal
	12041.5	31.7	17.3	49.0	74.0	-25.0	Peak	Horizontal
*	8658.5	32.2	12.7	44.9	88.2	-43.3	Peak	Vertical
*	10265.0	34.7	15.1	49.8	88.2	-38.4	Peak	Vertical
	11183.0	32.3	17.5	49.8	74.0	-24.2	Peak	Vertical
	11591.0	31.5	17.7	49.2	74.0	-24.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE160 (Nss=1)	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8777.5	32.8	13.3	46.1	88.2	-42.1	Peak	Horizontal
*	10265.0	34.7	15.1	49.8	88.2	-38.4	Peak	Horizontal
	11183.0	32.3	17.5	49.8	74.0	-24.2	Peak	Horizontal
	12611.0	32.0	17.8	49.8	74.0	-24.2	Peak	Horizontal
*	8973.0	33.8	13.5	47.3	88.2	-40.9	Peak	Vertical
*	10205.5	33.1	14.7	47.8	88.2	-40.4	Peak	Vertical
	10953.5	31.9	16.8	48.7	74.0	-25.3	Peak	Vertical
	11650.5	31.0	17.7	48.7	74.0	-25.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE160 (Nss=1)	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8786.0	32.4	13.3	45.7	88.2	-42.5	Peak	Horizontal
*	10265.0	32.8	15.1	47.9	88.2	-40.3	Peak	Horizontal
	10885.5	33.0	17.0	50.0	74.0	-24.0	Peak	Horizontal
	11642.0	30.9	17.7	48.6	74.0	-25.4	Peak	Horizontal
*	8616.0	32.1	12.9	45.0	88.2	-43.2	Peak	Vertical
*	10520.0	33.2	16.1	49.3	88.2	-38.9	Peak	Vertical
	11565.5	31.8	17.8	49.6	74.0	-24.4	Peak	Vertical
	12271.0	32.1	17.4	49.5	74.0	-24.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE160 (Nss=1)	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8692.5	30.7	13.0	43.7	88.2	-44.5	Peak	Horizontal
*	9933.5	32.8	14.5	47.3	88.2	-40.9	Peak	Horizontal
	11115.0	32.6	17.5	50.1	74.0	-23.9	Peak	Horizontal
	11727.0	31.8	17.5	49.3	74.0	-24.7	Peak	Horizontal
*	8743.5	32.5	13.1	45.6	88.2	-42.6	Peak	Vertical
*	9976.0	34.3	14.6	48.9	88.2	-39.3	Peak	Vertical
	11293.5	31.1	17.8	48.9	74.0	-25.1	Peak	Vertical
	12152.0	30.8	17.5	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE160 (Nss=1)	Test Channel	111
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8786.0	32.4	13.3	45.7	88.2	-42.5	Peak	Horizontal
*	9984.5	33.9	14.6	48.5	88.2	-39.7	Peak	Horizontal
	10911.0	31.7	17.6	49.3	74.0	-24.7	Peak	Horizontal
	12075.5	31.4	17.1	48.5	74.0	-25.5	Peak	Horizontal
*	8752.0	32.4	13.1	45.5	88.2	-42.7	Peak	Vertical
*	9721.0	33.2	14.1	47.3	88.2	-40.9	Peak	Vertical
	10605.0	33.6	16.4	50.0	74.0	-24.0	Peak	Vertical
	11659.0	31.7	17.8	49.5	74.0	-24.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE160 (Nss=1)	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8964.5	33.1	13.4	46.5	88.2	-41.7	Peak	Horizontal
*	10477.5	33.6	15.9	49.5	88.2	-38.7	Peak	Horizontal
	11302.0	32.3	17.6	49.9	74.0	-24.1	Peak	Horizontal
	12254.0	30.2	18.0	48.2	74.0	-25.8	Peak	Horizontal
*	8964.5	33.1	13.4	46.5	88.2	-41.7	Peak	Vertical
*	10477.5	33.6	15.9	49.5	88.2	-38.7	Peak	Vertical
	11123.5	33.0	17.4	50.4	74.0	-23.6	Peak	Vertical
	11599.5	31.9	17.7	49.6	74.0	-24.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE160 (Nss=1)	Test Channel	175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8760.5	32.0	13.2	45.2	88.2	-43.0	Peak	Horizontal
*	10231.0	32.7	15.0	47.7	88.2	-40.5	Peak	Horizontal
	11166.0	32.2	17.3	49.5	74.0	-24.5	Peak	Horizontal
	12636.5	32.3	17.3	49.6	74.0	-24.4	Peak	Horizontal
*	8760.5	31.6	13.2	44.8	88.2	-43.4	Peak	Vertical
*	10571.0	32.5	15.9	48.4	88.2	-39.8	Peak	Vertical
	11047.0	32.9	16.9	49.8	74.0	-24.2	Peak	Vertical
	11744.0	31.5	17.5	49.0	74.0	-25.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE160 (Nss=1)	Test Channel	207
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8718.0	32.1	13.1	45.2	88.2	-43.0	Peak	Horizontal
*	9831.5	33.4	14.1	47.5	88.2	-40.7	Peak	Horizontal
	10834.5	31.5	17.5	49.0	74.0	-25.0	Peak	Horizontal
	11582.5	32.1	17.8	49.9	74.0	-24.1	Peak	Horizontal
*	8718.0	32.4	13.1	45.5	88.2	-42.7	Peak	Vertical
*	10265.0	33.3	15.1	48.4	88.2	-39.8	Peak	Vertical
	11140.5	31.9	17.2	49.1	74.0	-24.9	Peak	Vertical
	12254.0	30.3	18.0	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=2)	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8939.0	32.5	13.4	45.9	88.2	-42.3	Peak	Horizontal
*	9823.0	32.9	14.2	47.1	88.2	-41.1	Peak	Horizontal
	11021.5	33.3	17.0	50.3	74.0	-23.7	Peak	Horizontal
	11650.5	31.5	17.7	49.2	74.0	-24.8	Peak	Horizontal
*	8777.5	32.2	13.3	45.5	88.2	-42.7	Peak	Vertical
*	10333.0	32.3	15.7	48.0	88.2	-40.2	Peak	Vertical
	11506.0	31.5	17.7	49.2	74.0	-24.8	Peak	Vertical
	12262.5	31.8	17.7	49.5	74.0	-24.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=2)	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8828.5	32.0	13.4	45.4	88.2	-42.8	Peak	Horizontal
*	9772.0	33.5	14.2	47.7	88.2	-40.5	Peak	Horizontal
	11013.0	32.5	16.9	49.4	74.0	-24.6	Peak	Horizontal
	12322.0	31.7	17.6	49.3	74.0	-24.7	Peak	Horizontal
*	8837.0	32.5	13.3	45.8	88.2	-42.4	Peak	Vertical
*	10078.0	33.2	14.3	47.5	88.2	-40.7	Peak	Vertical
	10766.5	32.4	16.8	49.2	74.0	-24.8	Peak	Vertical
	11642.0	31.9	17.7	49.6	74.0	-24.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=2)	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8845.5	32.9	13.5	46.4	88.2	-41.8	Peak	Horizontal
*	9797.5	33.2	14.2	47.4	88.2	-40.8	Peak	Horizontal
	10783.5	32.7	17.0	49.7	74.0	-24.3	Peak	Horizontal
	11506.0	31.5	17.7	49.2	74.0	-24.8	Peak	Horizontal
*	8735.0	32.4	13.2	45.6	88.2	-42.6	Peak	Vertical
*	10222.5	33.1	14.8	47.9	88.2	-40.3	Peak	Vertical
	10834.5	32.3	17.5	49.8	74.0	-24.2	Peak	Vertical
	11591.0	32.7	17.7	50.4	74.0	-23.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=2)	Test Channel	97
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8709.5	31.9	12.9	44.8	88.2	-43.4	Peak	Horizontal
*	9925.0	33.5	14.3	47.8	88.2	-40.4	Peak	Horizontal
	10919.5	32.2	17.3	49.5	74.0	-24.5	Peak	Horizontal
	11659.0	31.7	17.8	49.5	74.0	-24.5	Peak	Horizontal
*	8701.0	31.9	12.9	44.8	88.2	-43.4	Peak	Vertical
*	9976.0	32.6	14.6	47.2	88.2	-41.0	Peak	Vertical
	11115.0	31.5	17.5	49.0	74.0	-25.0	Peak	Vertical
	12143.5	30.7	17.5	48.2	74.0	-25.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=2)	Test Channel	105
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8811.5	32.6	13.5	46.1	88.2	-42.1	Peak	Horizontal
*	9899.5	33.1	14.2	47.3	88.2	-40.9	Peak	Horizontal
	10826.0	32.3	17.6	49.9	74.0	-24.1	Peak	Horizontal
	12254.0	31.1	18.0	49.1	74.0	-24.9	Peak	Horizontal
*	8845.5	31.7	13.5	45.2	88.2	-43.0	Peak	Vertical
*	10001.5	33.1	14.3	47.4	88.2	-40.8	Peak	Vertical
	10826.0	31.7	17.6	49.3	74.0	-24.7	Peak	Vertical
	11812.0	32.1	17.4	49.5	74.0	-24.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=2)	Test Channel	113
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8964.5	32.7	13.4	46.1	88.2	-42.1	Peak	Horizontal
*	10528.5	32.5	16.1	48.6	88.2	-39.6	Peak	Horizontal
	10911.0	31.7	17.6	49.3	74.0	-24.7	Peak	Horizontal
	12245.5	30.7	18.0	48.7	74.0	-25.3	Peak	Horizontal
*	8837.0	33.3	13.3	46.6	88.2	-41.6	Peak	Vertical
*	10528.5	33.0	16.1	49.1	88.2	-39.1	Peak	Vertical
	10877.0	32.4	16.9	49.3	74.0	-24.7	Peak	Vertical
	12135.0	31.6	17.3	48.9	74.0	-25.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=2)	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8743.5	33.1	13.1	46.2	88.2	-42.0	Peak	Horizontal
*	9789.0	32.8	14.2	47.0	88.2	-41.2	Peak	Horizontal
	11106.5	32.4	17.2	49.6	74.0	-24.4	Peak	Horizontal
	11616.5	31.1	17.6	48.7	74.0	-25.3	Peak	Horizontal
*	8692.5	32.2	13.0	45.2	88.2	-43.0	Peak	Vertical
*	10171.5	33.6	14.5	48.1	88.2	-40.1	Peak	Vertical
	10894.0	32.4	17.1	49.5	74.0	-24.5	Peak	Vertical
	12203.0	31.5	17.6	49.1	74.0	-24.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=2)	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8658.5	30.6	12.7	43.3	88.2	-44.9	Peak	Horizontal
*	9780.5	34.4	14.2	48.6	88.2	-39.6	Peak	Horizontal
	10834.5	32.4	17.5	49.9	74.0	-24.1	Peak	Horizontal
	11820.5	31.7	17.2	48.9	74.0	-25.1	Peak	Horizontal
*	8896.5	31.7	13.5	45.2	88.2	-43.0	Peak	Vertical
*	9857.0	33.2	14.3	47.5	88.2	-40.7	Peak	Vertical
	10766.5	32.2	16.8	49.0	74.0	-25.0	Peak	Vertical
	11693.0	31.7	17.5	49.2	74.0	-24.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=2)	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8811.5	32.2	13.5	45.7	88.2	-42.5	Peak	Horizontal
*	10265.0	33.1	15.1	48.2	88.2	-40.0	Peak	Horizontal
	10826.0	31.3	17.6	48.9	74.0	-25.1	Peak	Horizontal
	12109.5	31.2	17.4	48.6	74.0	-25.4	Peak	Horizontal
*	8811.5	32.2	13.5	45.7	88.2	-42.5	Peak	Vertical
*	10256.5	33.0	15.1	48.1	88.2	-40.1	Peak	Vertical
	10987.5	32.7	17.3	50.0	74.0	-24.0	Peak	Vertical
	11497.5	32.0	17.5	49.5	74.0	-24.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=2)	Test Channel	185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8922.0	32.0	13.6	45.6	88.2	-42.6	Peak	Horizontal
*	10307.5	33.3	15.4	48.7	88.2	-39.5	Peak	Horizontal
	11625.0	31.5	17.6	49.1	74.0	-24.9	Peak	Horizontal
	12169.0	31.5	17.5	49.0	74.0	-25.0	Peak	Horizontal
*	8760.5	32.8	13.2	46.0	88.2	-42.2	Peak	Vertical
*	9950.5	34.7	14.5	49.2	88.2	-39.0	Peak	Vertical
	11115.0	32.3	17.5	49.8	74.0	-24.2	Peak	Vertical
	11523.0	32.0	17.6	49.6	74.0	-24.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=2)	Test Channel	189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8769.0	31.9	13.2	45.1	88.2	-43.1	Peak	Horizontal
*	10248.0	32.8	15.2	48.0	88.2	-40.2	Peak	Horizontal
	11047.0	32.0	16.9	48.9	74.0	-25.1	Peak	Horizontal
	12322.0	30.6	17.6	48.2	74.0	-25.8	Peak	Horizontal
*	8760.5	32.3	13.2	45.5	88.2	-42.7	Peak	Vertical
*	9925.0	33.4	14.3	47.7	88.2	-40.5	Peak	Vertical
	11455.0	32.6	17.3	49.9	74.0	-24.1	Peak	Vertical
	12194.5	31.7	17.6	49.3	74.0	-24.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=2)	Test Channel	213
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8803.0	32.5	13.4	45.9	88.2	-42.3	Peak	Horizontal
*	10358.5	32.8	15.8	48.6	88.2	-39.6	Peak	Horizontal
	10834.5	32.1	17.5	49.6	74.0	-24.4	Peak	Horizontal
	12322.0	31.5	17.6	49.1	74.0	-24.9	Peak	Horizontal
*	8879.5	31.9	13.3	45.2	88.2	-43.0	Peak	Vertical
*	9840.0	33.9	14.1	48.0	88.2	-40.2	Peak	Vertical
	10987.5	32.2	17.3	49.5	74.0	-24.5	Peak	Vertical
	11514.5	32.1	17.6	49.7	74.0	-24.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE20 (Nss=2)	Test Channel	229
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8854.0	32.2	13.6	45.8	88.2	-42.4	Peak	Horizontal
*	10256.5	32.7	15.1	47.8	88.2	-40.4	Peak	Horizontal
	10851.5	32.3	17.1	49.4	74.0	-24.6	Peak	Horizontal
	11684.5	32.2	17.4	49.6	74.0	-24.4	Peak	Horizontal
*	8854.0	32.1	13.6	45.7	88.2	-42.5	Peak	Vertical
*	10248.0	32.5	15.2	47.7	88.2	-40.5	Peak	Vertical
	10996.0	32.1	17.3	49.4	74.0	-24.6	Peak	Vertical
	11735.5	31.1	17.5	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE40 (Nss=2)	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8743.5	31.9	13.1	45.0	88.2	-43.2	Peak	Horizontal
*	9738.0	32.9	14.1	47.0	88.2	-41.2	Peak	Horizontal
	10911.0	31.7	17.6	49.3	74.0	-24.7	Peak	Horizontal
	12305.0	31.4	17.4	48.8	74.0	-25.2	Peak	Horizontal
*	8794.5	32.0	13.4	45.4	88.2	-42.8	Peak	Vertical
*	9865.5	33.5	14.3	47.8	88.2	-40.4	Peak	Vertical
	10690.0	32.7	16.6	49.3	74.0	-24.7	Peak	Vertical
	11217.0	31.8	17.8	49.6	74.0	-24.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE40 (Nss=2)	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8811.5	31.8	13.5	45.3	88.2	-42.9	Peak	Horizontal
*	10341.5	32.7	15.6	48.3	88.2	-39.9	Peak	Horizontal
	11174.5	32.7	17.3	50.0	74.0	-24.0	Peak	Horizontal
	12237.0	30.4	17.9	48.3	74.0	-25.7	Peak	Horizontal
*	8786.0	31.9	13.3	45.2	88.2	-43.0	Peak	Vertical
*	9891.0	33.7	14.2	47.9	88.2	-40.3	Peak	Vertical
	11574.0	31.2	18.0	49.2	74.0	-24.8	Peak	Vertical
	12203.0	31.4	17.6	49.0	74.0	-25.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE40 (Nss=2)	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8701.0	31.5	12.9	44.4	88.2	-43.8	Peak	Horizontal
*	9891.0	33.7	14.2	47.9	88.2	-40.3	Peak	Horizontal
	10826.0	31.6	17.6	49.2	74.0	-24.8	Peak	Horizontal
	12653.5	31.8	17.4	49.2	74.0	-24.8	Peak	Horizontal
*	8811.5	31.9	13.5	45.4	88.2	-42.8	Peak	Vertical
*	10231.0	34.4	15.0	49.4	88.2	-38.8	Peak	Vertical
	10843.0	32.7	17.3	50.0	74.0	-24.0	Peak	Vertical
	11642.0	31.7	17.7	49.4	74.0	-24.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE40 (Nss=2)	Test Channel	99
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8820.0	32.2	13.5	45.7	88.2	-42.5	Peak	Horizontal
*	9891.0	33.9	14.2	48.1	88.2	-40.1	Peak	Horizontal
	11140.5	33.0	17.2	50.2	74.0	-23.8	Peak	Horizontal
	11744.0	31.8	17.5	49.3	74.0	-24.7	Peak	Horizontal
*	8675.5	32.5	12.8	45.3	88.2	-42.9	Peak	Vertical
*	9916.5	33.4	14.1	47.5	88.2	-40.7	Peak	Vertical
	11064.0	31.9	17.3	49.2	74.0	-24.8	Peak	Vertical
	11905.5	32.0	16.9	48.9	74.0	-25.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE40 (Nss=2)	Test Channel	107
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8777.5	32.8	13.3	46.1	88.2	-42.1	Peak	Horizontal
*	10239.5	33.0	15.1	48.1	88.2	-40.1	Peak	Horizontal
	10996.0	32.0	17.3	49.3	74.0	-24.7	Peak	Horizontal
	11506.0	32.4	17.7	50.1	74.0	-23.9	Peak	Horizontal
*	8599.0	33.0	12.5	45.5	88.2	-42.7	Peak	Vertical
*	10333.0	32.3	15.7	48.0	88.2	-40.2	Peak	Vertical
	11225.5	31.7	17.5	49.2	74.0	-24.8	Peak	Vertical
	12254.0	30.7	18.0	48.7	74.0	-25.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE40 (Nss=2)	Test Channel	115
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8718.0	32.1	13.1	45.2	88.2	-43.0	Peak	Horizontal
*	9644.5	34.1	14.0	48.1	88.2	-40.1	Peak	Horizontal
	10775.0	32.4	17.1	49.5	74.0	-24.5	Peak	Horizontal
	11803.5	31.9	17.4	49.3	74.0	-24.7	Peak	Horizontal
*	8726.5	32.1	13.2	45.3	88.2	-42.9	Peak	Vertical
*	10001.5	33.2	14.3	47.5	88.2	-40.7	Peak	Vertical
	11268.0	31.4	17.6	49.0	74.0	-25.0	Peak	Vertical
	11650.5	30.9	17.7	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-04-15
Test Mode	802.11ax-HE40 (Nss=2)	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9661.5	35.3	13.6	48.9	88.2	-39.3	Peak	Horizontal
*	10265.0	34.2	14.7	48.9	88.2	-39.3	Peak	Horizontal
	11072.5	34.0	16.7	50.7	74.0	-23.3	Peak	Horizontal
	11497.5	32.9	17.5	50.4	74.0	-23.6	Peak	Horizontal
*	9636.0	34.5	13.6	48.1	88.2	-40.1	Peak	Vertical
*	10205.5	34.4	14.2	48.6	88.2	-39.6	Peak	Vertical
	11123.5	33.6	16.9	50.5	74.0	-23.5	Peak	Vertical
	12330.5	33.1	17.4	50.5	74.0	-23.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE40 (Nss=2)	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8786.0	31.6	13.3	44.9	88.2	-43.3	Peak	Horizontal
*	9882.5	33.1	14.2	47.3	88.2	-40.9	Peak	Horizontal
	10843.0	32.1	17.3	49.4	74.0	-24.6	Peak	Horizontal
	11718.5	31.4	17.5	48.9	74.0	-25.1	Peak	Horizontal
*	8769.0	32.7	13.2	45.9	88.2	-42.3	Peak	Vertical
*	10562.5	33.3	15.9	49.2	88.2	-39.0	Peak	Vertical
	11285.0	32.4	18.0	50.4	74.0	-23.6	Peak	Vertical
	12220.0	31.0	17.6	48.6	74.0	-25.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-04-15
Test Mode	802.11ax-HE40 (Nss=2)	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9721.0	34.4	13.8	48.2	88.2	-40.0	Peak	Horizontal
*	10333.0	33.3	15.4	48.7	88.2	-39.5	Peak	Horizontal
	11132.0	33.0	17.0	50.0	74.0	-24.0	Peak	Horizontal
	12330.5	32.3	17.4	49.7	74.0	-24.3	Peak	Horizontal
*	9593.5	35.0	13.6	48.6	88.2	-39.6	Peak	Vertical
*	10197.0	35.0	14.3	49.3	88.2	-38.9	Peak	Vertical
	11132.0	33.7	17.0	50.7	74.0	-23.3	Peak	Vertical
	11497.5	32.8	17.5	50.3	74.0	-23.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE40 (Nss=2)	Test Channel	187
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8777.5	32.7	13.3	46.0	88.2	-42.2	Peak	Horizontal
*	10299.0	32.9	15.4	48.3	88.2	-39.9	Peak	Horizontal
	10979.0	31.8	17.4	49.2	74.0	-24.8	Peak	Horizontal
	12254.0	30.2	18.0	48.2	74.0	-25.8	Peak	Horizontal
*	8718.0	32.0	13.1	45.1	88.2	-43.1	Peak	Vertical
*	10273.5	33.3	15.1	48.4	88.2	-39.8	Peak	Vertical
	10817.5	32.4	17.4	49.8	74.0	-24.2	Peak	Vertical
	12203.0	31.3	17.6	48.9	74.0	-25.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-04-15
Test Mode	802.11ax-HE40 (Nss=2)	Test Channel	195
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9670.0	34.6	13.6	48.2	88.2	-40.0	Peak	Horizontal
*	10367.0	34.4	15.2	49.6	88.2	-38.6	Peak	Horizontal
	11514.5	32.9	17.5	50.4	74.0	-23.6	Peak	Horizontal
	12330.5	32.1	17.4	49.5	74.0	-24.5	Peak	Horizontal
*	9746.5	35.2	13.6	48.8	88.2	-39.4	Peak	Vertical
*	10290.5	34.6	14.7	49.3	88.2	-38.9	Peak	Vertical
	10911.0	33.2	17.2	50.4	74.0	-23.6	Peak	Vertical
	11582.5	32.4	17.7	50.1	74.0	-23.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE40 (Nss=2)	Test Channel	211
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8896.5	33.1	13.5	46.6	88.2	-41.6	Peak	Horizontal
*	10239.5	34.2	15.1	49.3	88.2	-38.9	Peak	Horizontal
	10911.0	32.3	17.6	49.9	74.0	-24.1	Peak	Horizontal
	11727.0	31.7	17.5	49.2	74.0	-24.8	Peak	Horizontal
*	8633.0	33.7	12.9	46.6	88.2	-41.6	Peak	Vertical
*	9789.0	32.5	14.2	46.7	88.2	-41.5	Peak	Vertical
	10911.0	31.6	17.6	49.2	74.0	-24.8	Peak	Vertical
	12262.5	31.7	17.7	49.4	74.0	-24.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE40 (Nss=2)	Test Channel	227
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8879.5	31.9	13.3	45.2	88.2	-43.0	Peak	Horizontal
*	10299.0	32.3	15.4	47.7	88.2	-40.5	Peak	Horizontal
	11565.5	32.4	17.8	50.2	74.0	-23.8	Peak	Horizontal
	12245.5	30.4	18.0	48.4	74.0	-25.6	Peak	Horizontal
*	8709.5	32.7	12.9	45.6	88.2	-42.6	Peak	Vertical
*	10248.0	32.5	15.2	47.7	88.2	-40.5	Peak	Vertical
	11157.5	32.1	17.4	49.5	74.0	-24.5	Peak	Vertical
	12602.5	31.3	17.6	48.9	74.0	-25.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE80 (Nss=2)	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8871.0	32.2	13.3	45.5	88.2	-42.7	Peak	Horizontal
*	10528.5	33.9	16.1	50.0	88.2	-38.2	Peak	Horizontal
	10826.0	31.7	17.6	49.3	74.0	-24.7	Peak	Horizontal
	12092.5	31.2	17.1	48.3	74.0	-25.7	Peak	Horizontal
*	8888.0	32.3	13.4	45.7	88.2	-42.5	Peak	Vertical
*	9848.5	33.1	14.2	47.3	88.2	-40.9	Peak	Vertical
	11132.0	32.4	17.3	49.7	74.0	-24.3	Peak	Vertical
	12271.0	31.4	17.4	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE80 (Nss=2)	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8692.5	32.2	13.0	45.2	88.2	-43.0	Peak	Horizontal
*	9976.0	33.2	14.6	47.8	88.2	-40.4	Peak	Horizontal
	10809.0	31.9	17.3	49.2	74.0	-24.8	Peak	Horizontal
	11438.0	31.9	17.7	49.6	74.0	-24.4	Peak	Horizontal
*	8896.5	31.7	13.5	45.2	88.2	-43.0	Peak	Vertical
*	10358.5	32.2	15.8	48.0	88.2	-40.2	Peak	Vertical
	11429.5	31.9	17.7	49.6	74.0	-24.4	Peak	Vertical
	12220.0	30.9	17.6	48.5	74.0	-25.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE80 (Nss=2)	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8599.0	32.7	12.5	45.2	88.2	-43.0	Peak	Horizontal
*	10290.5	33.3	15.2	48.5	88.2	-39.7	Peak	Horizontal
	10902.5	32.3	17.3	49.6	74.0	-24.4	Peak	Horizontal
	12245.5	30.9	18.0	48.9	74.0	-25.1	Peak	Horizontal
*	8701.0	32.6	12.9	45.5	88.2	-42.7	Peak	Vertical
*	10528.5	32.7	16.1	48.8	88.2	-39.4	Peak	Vertical
	11157.5	31.6	17.4	49.0	74.0	-25.0	Peak	Vertical
	12126.5	31.0	17.3	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE80 (Nss=2)	Test Channel	103
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8777.5	32.0	13.3	45.3	88.2	-42.9	Peak	Horizontal
*	10290.5	34.4	15.2	49.6	88.2	-38.6	Peak	Horizontal
	10953.5	33.1	16.8	49.9	74.0	-24.1	Peak	Horizontal
	12313.5	32.0	17.5	49.5	74.0	-24.5	Peak	Horizontal
*	8726.5	32.4	13.2	45.6	88.2	-42.6	Peak	Vertical
*	10273.5	33.0	15.1	48.1	88.2	-40.1	Peak	Vertical
	10996.0	31.3	17.3	48.6	74.0	-25.4	Peak	Vertical
	12262.5	31.1	17.7	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE80 (Nss=2)	Test Channel	119
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8777.5	32.4	13.3	45.7	88.2	-42.5	Peak	Horizontal
*	10324.5	32.8	15.6	48.4	88.2	-39.8	Peak	Horizontal
	11106.5	32.5	17.2	49.7	74.0	-24.3	Peak	Horizontal
	12339.0	32.5	17.1	49.6	74.0	-24.4	Peak	Horizontal
*	8709.5	32.6	12.9	45.5	88.2	-42.7	Peak	Vertical
*	10239.5	32.8	15.1	47.9	88.2	-40.3	Peak	Vertical
	11064.0	32.0	17.3	49.3	74.0	-24.7	Peak	Vertical
	12245.5	30.4	18.0	48.4	74.0	-25.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE80 (Nss=2)	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8743.5	32.0	13.1	45.1	88.2	-43.1	Peak	Horizontal
*	9729.5	32.9	14.1	47.0	88.2	-41.2	Peak	Horizontal
	11098.0	32.2	16.8	49.0	74.0	-25.0	Peak	Horizontal
	12237.0	30.6	17.9	48.5	74.0	-25.5	Peak	Horizontal
*	8769.0	32.4	13.2	45.6	88.2	-42.6	Peak	Vertical
*	9899.5	33.7	14.2	47.9	88.2	-40.3	Peak	Vertical
	11123.5	32.3	17.4	49.7	74.0	-24.3	Peak	Vertical
	12441.0	31.1	16.9	48.0	74.0	-26.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE80 (Nss=2)	Test Channel	183
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8658.5	30.6	12.7	43.3	88.2	-44.9	Peak	Horizontal
*	10231.0	33.5	15.0	48.5	88.2	-39.7	Peak	Horizontal
	10962.0	31.8	16.9	48.7	74.0	-25.3	Peak	Horizontal
	12211.5	30.7	17.5	48.2	74.0	-25.8	Peak	Horizontal
*	8786.0	31.8	13.3	45.1	88.2	-43.1	Peak	Vertical
*	10341.5	32.0	15.6	47.6	88.2	-40.6	Peak	Vertical
	11106.5	31.7	17.2	48.9	74.0	-25.1	Peak	Vertical
	12288.0	30.7	17.0	47.7	74.0	-26.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE80 (Nss=2)	Test Channel	199
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8794.5	32.4	13.4	45.8	88.2	-42.4	Peak	Horizontal
*	10367.0	32.2	15.9	48.1	88.2	-40.1	Peak	Horizontal
	11064.0	32.1	17.3	49.4	74.0	-24.6	Peak	Horizontal
	12245.5	30.1	18.0	48.1	74.0	-25.9	Peak	Horizontal
*	8752.0	32.4	13.1	45.5	88.2	-42.7	Peak	Vertical
*	9976.0	32.8	14.6	47.4	88.2	-40.8	Peak	Vertical
	10826.0	31.5	17.6	49.1	74.0	-24.9	Peak	Vertical
	12211.5	31.3	17.5	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE80 (Nss=2)	Test Channel	215
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8777.5	31.8	13.3	45.1	88.2	-43.1	Peak	Horizontal
*	9899.5	33.0	14.2	47.2	88.2	-41.0	Peak	Horizontal
	10783.5	31.6	17.0	48.6	74.0	-25.4	Peak	Horizontal
	12254.0	30.4	18.0	48.4	74.0	-25.6	Peak	Horizontal
*	8616.0	32.2	12.9	45.1	88.2	-43.1	Peak	Vertical
*	10520.0	32.6	16.1	48.7	88.2	-39.5	Peak	Vertical
	11115.0	31.2	17.5	48.7	74.0	-25.3	Peak	Vertical
	11948.0	31.1	17.0	48.1	74.0	-25.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE160 (Nss=2)	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8709.5	32.3	12.9	45.2	88.2	-43.0	Peak	Horizontal
*	10435.0	32.6	16.1	48.7	88.2	-39.5	Peak	Horizontal
	11285.0	31.6	18.0	49.6	74.0	-24.4	Peak	Horizontal
	12322.0	30.7	17.6	48.3	74.0	-25.7	Peak	Horizontal
*	8599.0	32.5	12.5	45.0	88.2	-43.2	Peak	Vertical
*	10520.0	32.7	16.1	48.8	88.2	-39.4	Peak	Vertical
	11106.5	31.9	17.2	49.1	74.0	-24.9	Peak	Vertical
	12254.0	29.8	18.0	47.8	74.0	-26.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE160 (Nss=2)	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8735.0	32.4	13.2	45.6	88.2	-42.6	Peak	Horizontal
*	10350.0	32.9	15.6	48.5	88.2	-39.7	Peak	Horizontal
	11463.5	32.1	17.2	49.3	74.0	-24.7	Peak	Horizontal
	12109.5	31.1	17.4	48.5	74.0	-25.5	Peak	Horizontal
*	8845.5	31.4	13.5	44.9	88.2	-43.3	Peak	Vertical
*	10324.5	32.5	15.6	48.1	88.2	-40.1	Peak	Vertical
	10979.0	32.2	17.4	49.6	74.0	-24.4	Peak	Vertical
	11565.5	30.9	17.8	48.7	74.0	-25.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE160 (Nss=2)	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8709.5	32.4	12.9	45.3	88.2	-42.9	Peak	Horizontal
*	10078.0	33.2	14.3	47.5	88.2	-40.7	Peak	Horizontal
	10979.0	31.5	17.4	48.9	74.0	-25.1	Peak	Horizontal
	12067.0	31.4	17.0	48.4	74.0	-25.6	Peak	Horizontal
*	8709.5	32.4	12.9	45.3	88.2	-42.9	Peak	Vertical
*	9797.5	33.4	14.2	47.6	88.2	-40.6	Peak	Vertical
	10843.0	31.6	17.3	48.9	74.0	-25.1	Peak	Vertical
	11531.5	31.7	17.4	49.1	74.0	-24.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE160 (Nss=2)	Test Channel	111
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8930.5	32.4	13.5	45.9	88.2	-42.3	Peak	Horizontal
*	9993.0	32.6	14.5	47.1	88.2	-41.1	Peak	Horizontal
	10613.5	32.3	16.4	48.7	74.0	-25.3	Peak	Horizontal
	11302.0	32.0	17.6	49.6	74.0	-24.4	Peak	Horizontal
*	8947.5	32.9	13.4	46.3	88.2	-41.9	Peak	Vertical
*	10528.5	32.2	16.1	48.3	88.2	-39.9	Peak	Vertical
	11047.0	32.2	16.9	49.1	74.0	-24.9	Peak	Vertical
	11506.0	31.3	17.7	49.0	74.0	-25.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE160 (Nss=2)	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8794.5	32.4	13.4	45.8	88.2	-42.4	Peak	Horizontal
*	10392.5	32.3	16.0	48.3	88.2	-39.9	Peak	Horizontal
	11004.5	32.1	17.1	49.2	74.0	-24.8	Peak	Horizontal
	11727.0	31.4	17.5	48.9	74.0	-25.1	Peak	Horizontal
*	8148.5	32.6	12.1	44.7	74.0	-29.3	Peak	Vertical
*	10486.0	32.2	15.9	48.1	88.2	-40.1	Peak	Vertical
	11072.5	31.9	17.2	49.1	74.0	-24.9	Peak	Vertical
	12262.5	31.1	17.7	48.8	74.0	-25.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE160 (Nss=2)	Test Channel	175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8616.0	32.0	12.9	44.9	88.2	-43.3	Peak	Horizontal
*	9891.0	32.8	14.2	47.0	88.2	-41.2	Peak	Horizontal
	10996.0	32.1	17.3	49.4	74.0	-24.6	Peak	Horizontal
	12228.5	31.3	17.7	49.0	74.0	-25.0	Peak	Horizontal
*	8905.0	31.9	13.6	45.5	88.2	-42.7	Peak	Vertical
*	9644.5	33.0	14.0	47.0	88.2	-41.2	Peak	Vertical
	10605.0	33.6	16.4	50.0	74.0	-24.0	Peak	Vertical
	11897.0	32.4	16.9	49.3	74.0	-24.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Bob Zhang
Test Site	WZ-AC2	Test Date	2023-02-13
Test Mode	802.11ax-HE160 (Nss=2)	Test Channel	207
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8641.5	32.2	12.8	45.0	88.2	-43.2	Peak	Horizontal
*	10001.5	33.0	14.3	47.3	88.2	-40.9	Peak	Horizontal
	10919.5	31.8	17.3	49.1	74.0	-24.9	Peak	Horizontal
	11506.0	31.0	17.7	48.7	74.0	-25.3	Peak	Horizontal
*	8709.5	33.3	12.9	46.2	88.2	-42.0	Peak	Vertical
*	9814.5	33.2	14.2	47.4	88.2	-40.8	Peak	Vertical
	11064.0	31.4	17.3	48.7	74.0	-25.3	Peak	Vertical
	11497.5	31.2	17.5	48.7	74.0	-25.3	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: WZ-AC1	Time: 2023/05/16 - 16:53
Limit: FCC_6G_RE(3m)	Engineer: Ajin Fan
Probe: FMZB1519_0.009-30MHz	Polarity: Coaxial
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at channel 6345MHz	

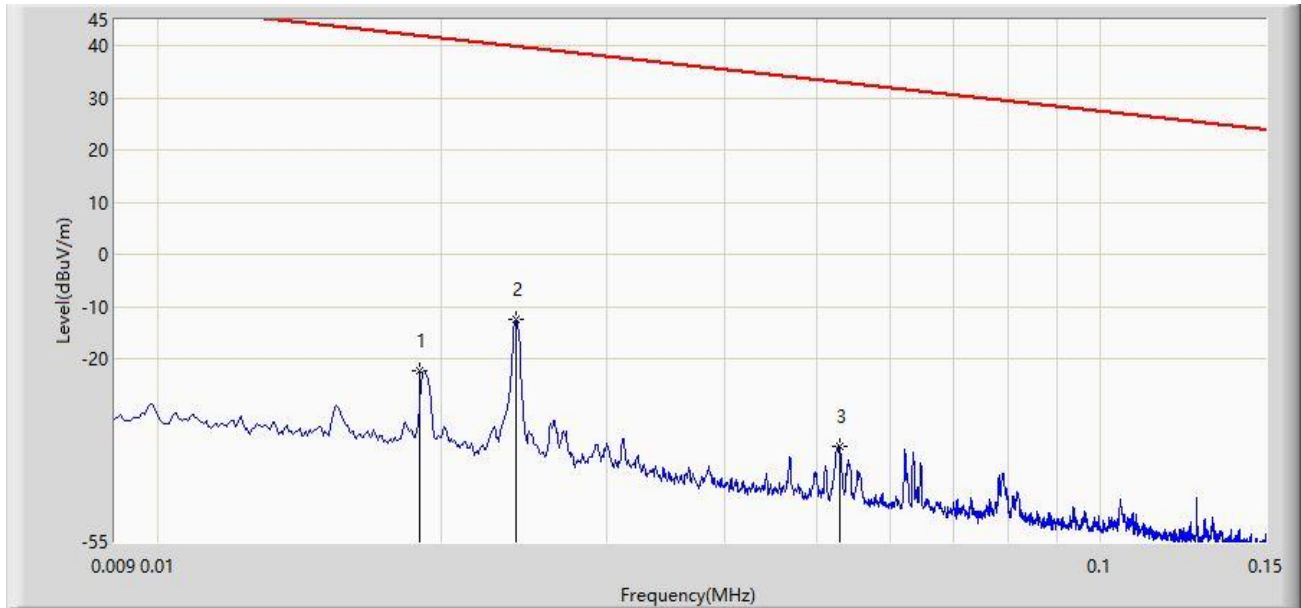

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		0.019	-22.136	37.750	-64.149	42.013	-59.886	PK
2	*	0.024	-12.475	48.001	-52.460	39.985	-60.476	PK
3		0.053	-36.825	25.560	-69.933	33.108	-62.385	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC1	Time: 2023/05/16 - 16:53
Limit: FCC_6G_RE(3m)	Engineer: Ajin Fan
Probe: FMZB1519_0.009-30MHz	Polarity: Coaxial
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at channel 6345MHz	

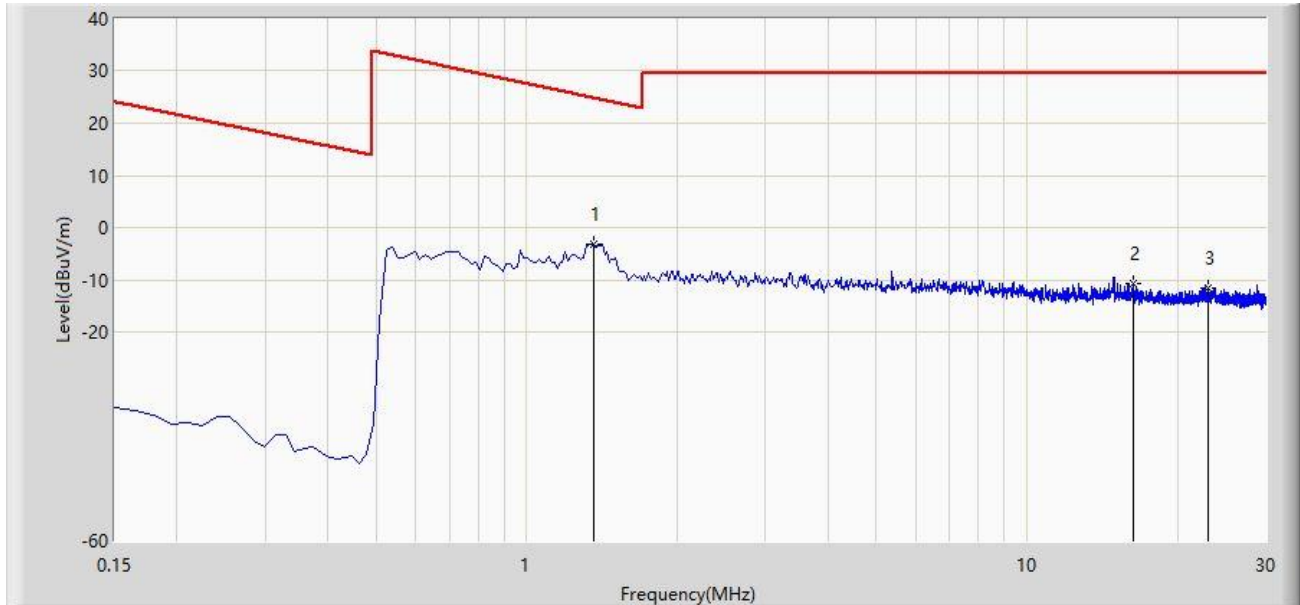

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	1.359	-3.075	19.260	-28.040	24.965	-22.331	PK
2		16.344	-10.734	12.115	-40.234	29.500	-22.844	PK
3		23.030	-11.679	11.108	-41.179	29.500	-22.786	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

Site: WZ-AC1	Time: 2023/05/16 - 16:53
Limit: FCC_6G_RE(3m)	Engineer: Ajin Fan
Probe: FMZB1519_0.009-30MHz	Polarity: Coplanar
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at channel 6345MHz	

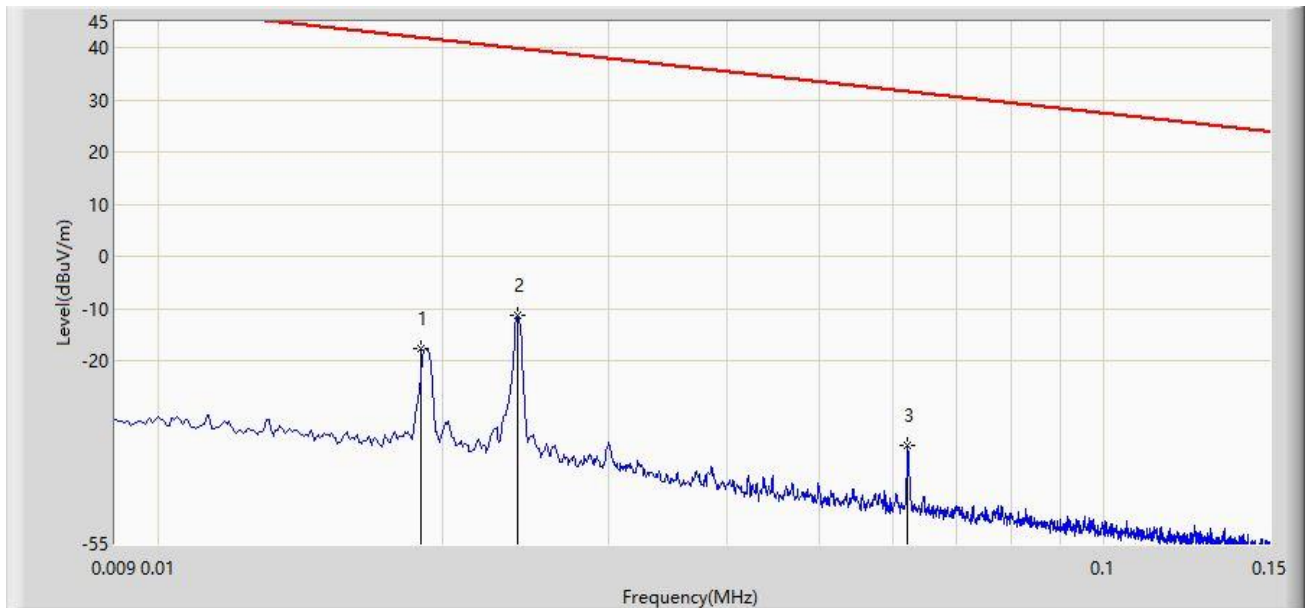

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		0.019	-17.530	42.356	-59.543	42.013	-59.886	PK
2	*	0.024	-11.153	49.323	-51.138	39.985	-60.476	PK
3		0.062	-36.238	26.237	-67.984	31.746	-62.475	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.