
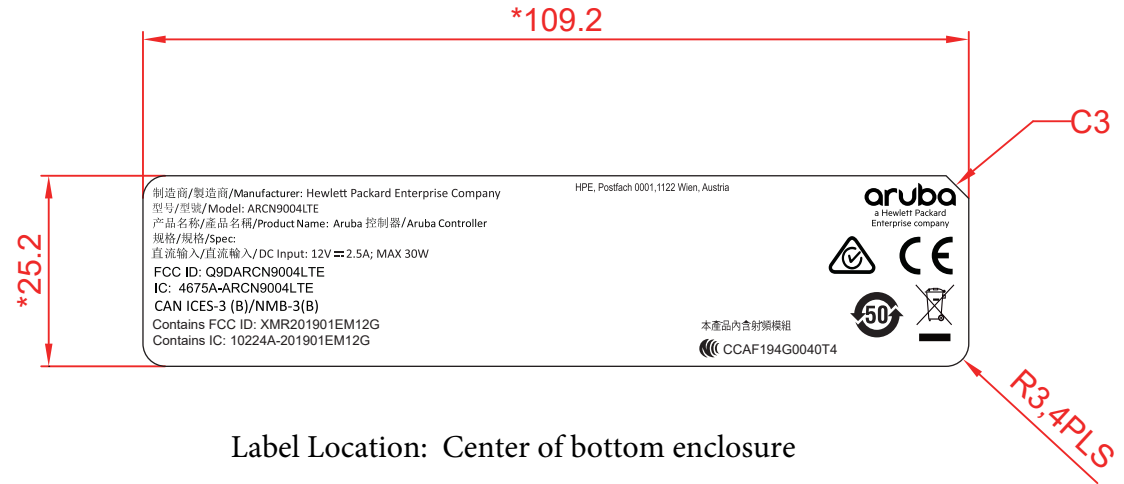


REVISIONS			
REV	DESCRIPTION	DATE	APPROVE
A	RELEASE	09/17/19	EDWARD SU

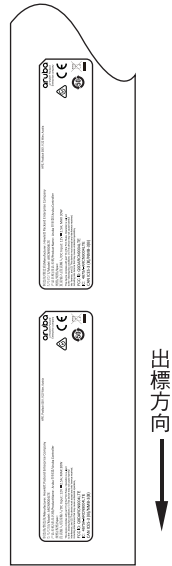

Label Location: Center of bottom enclosure

NOTES:

- MATERIAL: WHITE PET, t=0.075
ADHESIVE: 網紋背膠, t=0.033
FINISH: 上霧PET, t=0.025
- COLOR:
 - 底色為白色
- 捲狀出貨
- 離型紙左右間距各3±0.5mm, 上下間距各3±0.3mm
- 被貼物: 鋁
- UL Approved,
須搭配碳帶: Ricoh Company Ltd., Type "XXXX", "XXXX" or "XXXX" thermal transfer ribbons
- 用於室內環境
- TEMPERATURE RESISTANT= 120° C
- AW印刷公差: 尺寸30mm以下~120mm為±0.3mm, 120~315mm為±0.5mm, 315以上±0.8mm

10. TEST REQUIREMENTS

	TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	附著力測試	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5% is affected.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE: INTEGRAL DIMENSIONS ± 0.2 1 PLACE DECIMAL ± 0.2 ANGULAR DIMENSIONS ± 2° HOLES UNDER Ø5.00 ± 0.2		THIRD ANGLE PROJECTION 		WNC 啟碁科技股份有限公司 Wistron NeWeb Corp. 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726	
DRAWN CATHY CHEN		09/17/19		DWG TITLE LABEL, AGENCY LABEL ARCN9004LTE ,RSSI-9004L	
ENGR CATHY CHEN		09/17/19		SIZE A4	DWG NO. 4L.RSSI9.001
APVD EDWARD SU		09/17/19		SCALE 1/1	SHEET 1 OF 1
				REV A	