



## **REGULATORY COMPLIANCE TEST REPORT**

**FCC CFR 47 15.247, RSS-247 Issue 2**

**Report No.: HPEN141-U4 Rev A (Wi-Fi)**

**Company:** Hewlett Packard Enterprise

**Model Name:** ASIN0301

## REGULATORY COMPLIANCE TEST REPORT

**Company:** Hewlett Packard Enterprise

**Model Name:** ASIN0301

**To:** FCC CFR47 Part 15 Subpart C 15.247 (DTS), RSS-247 Issue 2

Test Report Serial No.: HPEN141-U4 Rev A (Wi-Fi)

This report supersedes: NONE

**Applicant:** Hewlett Packard Enterprise Company  
3333 Scott Blvd.  
Santa Clara, California 95054  
USA

**Issue Date:** 3<sup>rd</sup> September 2019

**This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**  
575 Boulder Court  
Pleasanton California 94566  
USA  
Phone: +1 (925) 462-0304  
Fax: +1 (925) 462-0306  
[www.micomlabs.com](http://www.micomlabs.com)



**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**

## Table of Contents

|   |           |
|---|-----------|
| <b>1. ACCREDITATION, LISTINGS &amp; RECOGNITION .....</b> | <b>4</b>  |
| 1.1. TESTING ACCREDITATION .....                          | 4         |
| 1.2. RECOGNITION .....                                    | 5         |
| 1.3. PRODUCT CERTIFICATION .....                          | 6         |
| <b>2. DOCUMENT HISTORY .....</b>                          | <b>7</b>  |
| <b>3. TEST RESULT CERTIFICATE .....</b>                   | <b>8</b>  |
| <b>4. REFERENCES AND MEASUREMENT UNCERTAINTY .....</b>    | <b>9</b>  |
| 4.1. Normative References .....                           | 9         |
| 4.2. Test and Uncertainty Procedure .....                 | 10        |
| <b>5. PRODUCT DETAILS AND TEST CONFIGURATIONS .....</b>   | <b>11</b> |
| 5.1. Technical Details .....                              | 11        |
| 5.2. Scope Of Test Program .....                          | 12        |
| 5.3. Equipment Model(s) and Serial Number(s).....         | 13        |
| 5.4. Antenna Details .....                                | 13        |
| 5.5. Cabling and I/O Ports .....                          | 13        |
| 5.6. Test Configurations .....                            | 13        |
| 5.7. Equipment Modifications .....                        | 14        |
| 5.8. Deviations from the Test Standard .....              | 14        |
| <b>6. TEST SUMMARY .....</b>                              | <b>15</b> |
| <b>7. TEST EQUIPMENT CONFIGURATION(S).....</b>            | <b>16</b> |
| 7.1. Conducted Test Setup .....                           | 16        |
| 7.2. Radiated Emissions - 3m Chamber .....                | 17        |
| 7.3. ac Wireline Emissions .....                          | 19        |
| <b>8. MEASUREMENT AND PRESENTATION OF TEST DATA.....</b>  | <b>20</b> |
| <b>9. TEST RESULTS.....</b>                               | <b>21</b> |
| 9.1. 6 dB & 99% Bandwidth .....                           | 21        |
| 9.2. Conducted Output Power .....                         | 26        |
| 9.3. Power Spectral Density .....                         | 32        |
| 9.4. Emissions .....                                      | 37        |
| 9.4.1. <i>Conducted Emissions</i> .....                   | 37        |
| 9.4.1.1. Conducted Spurious Emissions .....               | 37        |
| 9.4.1.2. Conducted Band-Edge Emissions .....              | 42        |
| 9.4.2. <i>Radiated Emissions</i> .....                    | 50        |
| 9.4.2.1. TX Spurious & Restricted Band Emissions .....    | 50        |
| 9.4.2.2. Restricted Edge & Band-Edge Emissions .....      | 55        |
| <b>A. APPENDIX - GRAPHICAL IMAGES.....</b>                | <b>60</b> |
| A.1. 6 dB & 99% Bandwidth .....                           | 61        |
| A.2. Power Spectral Density .....                         | 85        |
| A.3. Emissions.....                                       | 121       |
| A.3.1. <i>Conducted Emissions</i> .....                   | 121       |
| A.3.1.1. Conducted Spurious Emissions .....               | 121       |
| A.3.1.2. Conducted Band-Edge Emissions.....               | 145       |
| A.3.2. <i>Radiated Emissions</i> .....                    | 161       |
| A.3.2.3. TX Spurious & Restricted Band Emissions .....    | 161       |
| A.3.2.4. Restricted Edge & Band-Edge Emissions .....      | 164       |

## 1. ACCREDITATION, LISTINGS & RECOGNITION

### 1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2005. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



### Accredited Laboratory

A2LA has accredited

**MiCOM LABS**

Pleasanton, CA

for technical competence in the field of

**Electrical Testing**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 14<sup>th</sup> day of May 2018.



President and CEO  
For the Accreditation Council  
Certificate Number 2381.01  
Valid to November 30, 2019

*For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.*

## 1.2. RECOGNITION

MiCOM Labs, Inc has widely recognized wireless testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA countries. MiCOM Labs test reports are accepted globally.

| Country   | Recognition Body   | Status | Phase      | Identification No.                      |
|-----------|--|--------|------------|---|
| USA       | Federal Communications Commission (FCC)  | TCB    | -          | US0159<br>Listing #: 102167             |
| Canada    | Industry Canada (IC)   | FCB    | APEC MRA 2 | US0159<br>Listing #: 4143A-2<br>4143A-3 |
| Japan     | MIC (Ministry of Internal Affairs and Communication)   | CAB    | APEC MRA 2 | RCB 210                                 |
|           | VCCI   | --     | --         | A-0012                                  |
| Europe    | European Commission  | NB     | EU MRA     | NB 2280                                 |
| Australia | Australian Communications and Media Authority (ACMA)   | CAB    | APEC MRA 1 | US0159                                  |
| Hong Kong | Office of the Telecommunication Authority (OFTA)   | CAB    | APEC MRA 1 |   |
| Korea     | Ministry of Information and Communication Radio Research Laboratory (RRL)                        | CAB    | APEC MRA 1 |   |
| Singapore | Infocomm Development Authority (IDA)   | CAB    | APEC MRA 1 |   |
| Taiwan    | National Communications Commission (NCC)<br>Bureau of Standards, Metrology and Inspection (BSMI) | CAB    | APEC MRA 1 |   |
| Vietnam   | Ministry of Communication (MIC)  | CAB    | APEC MRA 1 |   |

EU MRA – European Union Mutual Recognition Agreement.

NB – Notified Body

APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

### 1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)  
Industry Canada – Certification Body, CAB Identifier – US0159  
Europe – Notified Body (NB), NB Identifier - 2280  
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

## 2. DOCUMENT HISTORY

| Document History |                                |                   |
|------------------|--------------------------------|-------------------|
| Revision         | Date                           | Comments          |
| Draft            | 5 <sup>th</sup> August 2019    | Draft for comment |
| Rev A            | 3 <sup>rd</sup> September 2019 | Initial Release   |
| .                |                                |                   |
| .                |                                |                   |
| .                |                                |                   |
| .                |                                |                   |
| .                |                                |                   |

In the above table the latest report revision will replace all earlier versions.

### 3. TEST RESULT CERTIFICATE

|   |  |
|---|--|
| <b>Manufacturer:</b> Hewlett Packard Enterprise<br>3333 Scott Blvd.<br>Santa Clara, California 95054<br>USA | <b>Tested By:</b> MiCOM Labs, Inc.<br>575 Boulder Court<br>Pleasanton, California 94566<br>USA |
| <b>Model:</b> ASIN0301  | <b>Telephone:</b> +1 925 462 0304  |
| <b>Equipment Type:</b> Mobile & Portable Client Device  | <b>Fax:</b> +1 925 462 0306  |
| <b>S/N's:</b> Conducted Testing: TWHXKRY005<br>Radiated Testing: TWHXKRY00P                                 |  |
| <b>Test Date(s):</b> 30 <sup>th</sup> – 31 <sup>st</sup> July 2019  | <b>Website:</b> www.micomlabs.com  |


| STANDARD(S)                               | TEST RESULTS       |
|---|--------------------|
| FCC CFR 47 Part 15 Subpart C 15.247 (DTS) | EQUIPMENT COMPLIES |

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.


**Notes:**

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

**Approved & Released for MiCOM Labs, Inc. by:**

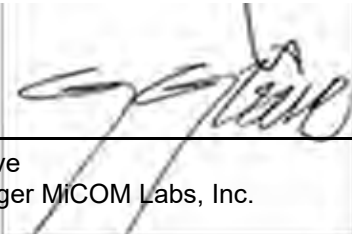

Graeme Grieve  
Quality Manager MiCOM Labs, Inc.

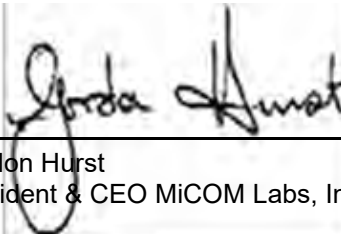

Gordon Hurst  
President & CEO MiCOM Labs, Inc.



## 4. REFERENCES AND MEASUREMENT UNCERTAINTY

### 4.1. Normative References

| REF. | PUBLICATION            | YEAR                                 | TITLE   |
|------|------------------------|--------------------------------------|---|
| I    | KDB 662911 D01 v02r01  | Oct 31 2013                          | Guidance for measurement of output emission of devices that employ single transmitter with multiple outputs or systems with multiple transmitters operating simultaneously in the same frequency band |
| II   | KDB 558074 D01 v05r02  | 2 <sup>nd</sup> April 2019           | Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices operating under section 15.247 of the FCC Rules.             |
| III  | A2LA                   | August 2018                          | R105 - Requirement's When Making Reference to A2LA Accreditation Status   |
| IV   | ANSI C63.10            | 2013                                 | American National Standard for Testing Unlicensed Wireless Devices  |
| V    | ANSI C63.4             | 2014                                 | American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz                                  |
| VI   | CISPR 32               | 2015                                 | Electromagnetic compatibility of multimedia equipment - Emission requirements   |
| VII  | ETSI TR 100 028        | 2001-12                              | Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics  |
| VIII | FCC 47 CFR Part 15.247 | 2016                                 | Radio Frequency Devices; Subpart C – Intentional Radiators  |
| IX   | ICES-003               | Issue 6 Jan 2016; Updated April 2019 | Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement.   |
| X    | M 3003                 | Edition 3 Nov.2012                   | Expression of Uncertainty and Confidence in Measurements  |
| XI   | RSS-247 Issue 2        | Feb 2017                             | Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices   |
| XII  | RSS-Gen Issue 5        | March 2019 Amendment 1               | General Requirements for Compliance of Radio Apparatus  |
| XIII | FCC 47 CFR Part 2.1033 | 2016                                 | FCC requirements and rules regarding photographs and test setup diagrams.   |

## **4.2. Test and Uncertainty Procedure**

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

## 5. PRODUCT DETAILS AND TEST CONFIGURATIONS

### 5.1. Technical Details

| Details                              | Description  |
|--------------------------------------|--|
| Purpose:                             | Test of the Hewlett Packard Enterprise Aruba User Experience Insight to FCC CFR 47 Part 15 Subpart C 15.247 (DTS) and RSS-247 Issue 2. |
| Applicant:                           | Hewlett Packard Enterprise<br>3333 Scott Blvd.<br>Santa Clara, California 95054<br>USA   |
| Manufacturer:                        | As applicant   |
| Laboratory performing the tests:     | MiCOM Labs, Inc.<br>575 Boulder Court<br>Pleasanton California 94566 USA   |
| Test report reference number:        | HPEN141-U4   |
| Date EUT received:                   | 30 <sup>th</sup> July 2019   |
| Dates of test (from - to):           | 30 <sup>th</sup> – 31 <sup>st</sup> July 2019  |
| No of Units Tested:                  | 2  |
| Product Family Name:                 | Aruba User Experience Insight  |
| Model(s):                            | ASIN0301   |
| Location for use:                    | Indoors  |
| Declared Frequency Range(s):         | 2400 - 2483.5 MHz;   |
| Technology:                          | 2x2 MIMO Access Point  |
| Type of Modulation:                  | CCK, OFDM  |
| EUT Modes of Operation:              | 2400 - 2483.5 MHz:<br>802.11b; 802.11g; 802.11n-HT-20; 802.11n HT-40;  |
| Declared Nominal Output Power (dBm): | +18dBm   |
| Rated Input Voltage and Current:     | +55Vdc, 0.6A   |
| Operating Temperature Range:         | -10°C to +45°C   |
| ITU Emission Designator:             | 802.11b (1 Mbit/s) 13M5G1D<br>802.11g 17M0D1D<br>802.11n – HT-20 17M7D1D<br>802.11n – HT-40 36M3D1D                                    |
| Equipment Dimensions:                | 26cm x 7.2cm x 4.2cm   |
| Weight:                              | <1kg   |
| Hardware Rev:                        | P2A  |
| Software Rev:                        | 4.14.76-armada-18.12.3   |
| Product Application:                 | Mobile & Portable Client Devices   |

## 5.2. Scope Of Test Program

### **Hewlett Packard Enterprise Company ASIN0301**

The scope of the test program was to test the Hewlett Packard Enterprise ASIN0301, Aruba User Experience Insight configurations in the frequency ranges 2400 - 2483.5 MHz; for compliance against the following specification:

### **FCC CFR 47 Part 15 Subpart C 15.247 (DTS)**

Radio Frequency Devices; Subpart C – Intentional Radiators

### **IC RSS-247**

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

### **Aruba Networks, Hewlett Packard Enterprise Company ASIN0301**



### 5.3. Equipment Model(s) and Serial Number(s)

| Type (EUT/Support) | Equipment Description           | Manufacturer               | Model No.  | Serial No. |
|--------------------|---------------------------------|----------------------------|------------|------------|
| EUT Conducted      | Mobile & Portable Client Device | Hewlett Packard Enterprise | ASIN0301   | TWHXKRY005 |
| EUT Radiated       | Mobile & Portable Client Device | Hewlett Packard Enterprise | ASIN0301   | TWHXKRY00P |
| Support            | POE Power Supply                | D-Link                     | EBU-101-T2 | --         |
| Support            | Test Equipment                  | MiCOM Labs                 | MiTest     | ML512      |

### 5.4. Antenna Details

| Type   | Manufacturer | Model | Family | Gain (dBi) | BF Gain | Dir BW | X-Pol | Frequency Band (MHz) |
|--|--------------|-------|--------|------------|---------|--------|-------|----------------------|
| integral   | Aruba        | AB2   | STAMP  | 2.0        | 3.0     | 360    | -     | 2400 - 2483.5        |
| BF Gain - Beamforming Gain<br>Dir BW - Directional BeamWidth<br>X-Pol - Cross Polarization |              |       |        |            |         |        |       |                      |

This is a 2x2 MIMO device with identical antennas

### 5.5. Cabling and I/O Ports

| Port Type       | Max Cable Length | # of Ports | Screened | Connector Type | Data Type | Data Rate(s) |
|-----------------|------------------|------------|----------|----------------|-----------|--------------|
| USB             | 5m               | 1          | Yes      | USB            | Digital   | Unknown      |
| Ethernet PoE IN | >30m             | 1          | No       | RJ45           | Packet    | 10,100,1000  |

### 5.6. Test Configurations

Results for the following configurations are provided in this report:

| Operational Mode(s)<br>(802.11a/b/g/n/ac) | Data Rate with Highest Power<br>MBit/s | Channel Frequency (MHz) |          |          |
|---|--|-------------------------|----------|----------|
|   |  | Low                     | Mid      | High     |
| <b>2400 - 2483.5 MHz</b>                  |  |                         |          |          |
| b   | 1                                      | 2,412.00                | 2,437.00 | 2,462.00 |
| g   | 6                                      | 2,412.00                | 2,437.00 | 2,462.00 |
| HT-20                                     | 6.5                                    | 2,412.00                | 2,437.00 | 2,462.00 |
| HT-40                                     | 13.5                                   | 2,422.00                | 2,437.00 | 2,452.00 |

### **5.7. Equipment Modifications**

The following modifications were required to bring the equipment into compliance:

1. NONE

### **5.8. Deviations from the Test Standard**

The following deviations from the test standard were required in order to complete the test program:

1. NONE

## 6. TEST SUMMARY

### List of Measurements

| Test Header                                 | Result   | Data Link  |
|---|----------|--|
| 6 dB & 99% Bandwidth                        | Complies | <a href="#">View Data</a>                          |
| Conducted Output Power                      | Complies | <a href="#">View Data</a>                          |
| Power Spectral Density                      | Complies | <a href="#">View Data</a>                          |
| Emissions                                   | Complies | -  |
| (1) Conducted Emissions                     | Complies | -  |
| (i) Conducted Spurious Emissions            | Complies | <a href="#">View Data</a>                          |
| (ii) Conducted Band-Edge Emissions          | Complies | <a href="#">View Data</a>                          |
| (2) Radiated Emissions                      | Complies | -  |
| (i) TX Spurious & Restricted Band Emissions | Complies | <a href="#">View Data</a>                          |
| (ii) Restricted Edge & Band-Edge Emissions  | Complies | <a href="#">View Data</a>                          |
| (3) Digital Emissions (0.03 - 1 GHz)        | Complies | See MiCOM Labs Test Report HPEN141-G3 FCC Part 15B |
| (4) AC Wireline Emissions                   | Complies | See MiCOM Labs Test Report HPEN141-G3 FCC Part 15B |
| Maximum Permissible Exposure                | Complies | See MiCOM Labs Test Report HPEN141-FCC MPE         |
| RF Unique Connector                         | Complies |  |


### Simultaneous Transmission

The ASIN0301 operates using two technologies BLE and Wi-Fi, these modes of operation can transmit simultaneously. Simultaneous transmission testing was performed to ensure continuous compliance when operating in this mode. No issues were found on the ASIN0301 during the radiated spurious examination where both technologies operated simultaneously.

## 7. TEST EQUIPMENT CONFIGURATION(S)

### 7.1. Conducted Test Setup

MiTest Automated Test System

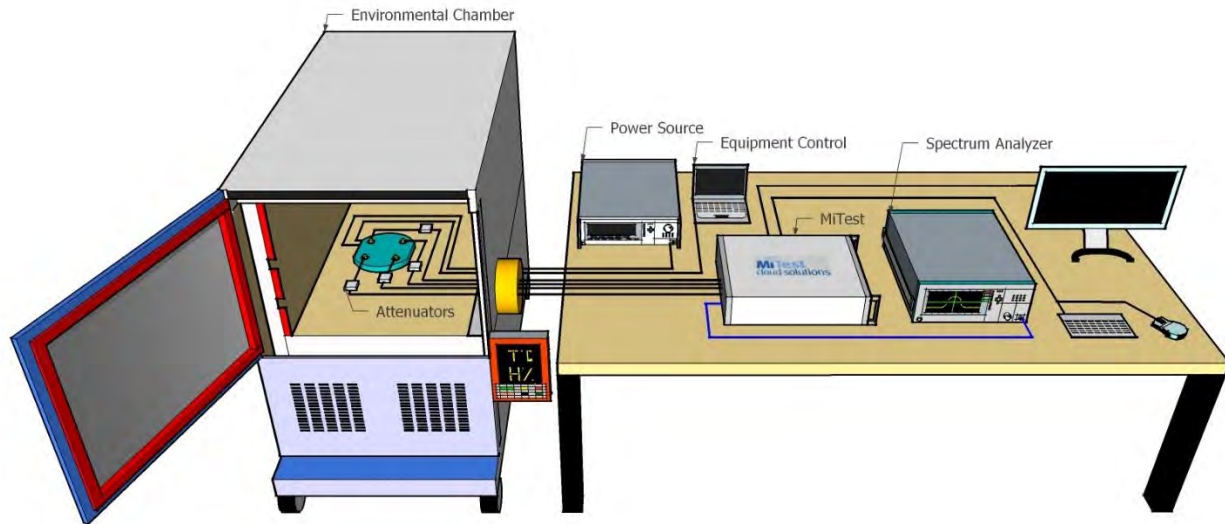

A full system calibration was performed on the test station and any resulting system losses (or gains) were considered in the production of all final measurement data.


| Asset# | Description                                    | Manufacturer         | Model#      | Serial#       | Calibration Due Date |
|--------|--|----------------------|-------------|---------------|----------------------|
| 249    | Resistance Thermometer                         | Thermotronics        | GR2105-02   | 9340 #2       | 30 Oct 2019          |
| 361    | Desktop for RF#1, Labview Software installed   | Dell                 | Vostro 220  | WS RF#1       | Not Required         |
| 378    | Rohde & Schwarz 40 GHz Receiver with Generator | Rhode & Schwarz      | ESIB40      | 100107/040    | 12 Oct 2019          |
| 405    | DC Power Supply 0-60V                          | Agilent              | 6654A       | MY4001826     | Cal when used        |
| 408    | USB to GPIB interface                          | National Instruments | GPIB-USB HS | 14C0DE9       | Not Required         |
| 445    | PoE Injector                                   | D-Link               | DPE-101GL   | QTAH1E2000625 | Not Required         |
| 461    | Spectrum Analyzer                              | Agilent              | E4440A      | MY46185537    | 20 Sep 2019          |
| 510    | Barometer/Thermometer                          | Control Company      | 68000-49    | 170871375     | 11 Dec 2019          |
| 75     | Environmental Chamber                          | Thermatron           | SE-300-2-2  | 27946         | 24 Feb 2020          |




## 7.2. Radiated Emissions - 3m Chamber

The following tests were performed using the radiated test set-up shown in the diagram below. Radiated emissions above and below 1GHz.

Radiated Emissions Above 1GHz Test Setup

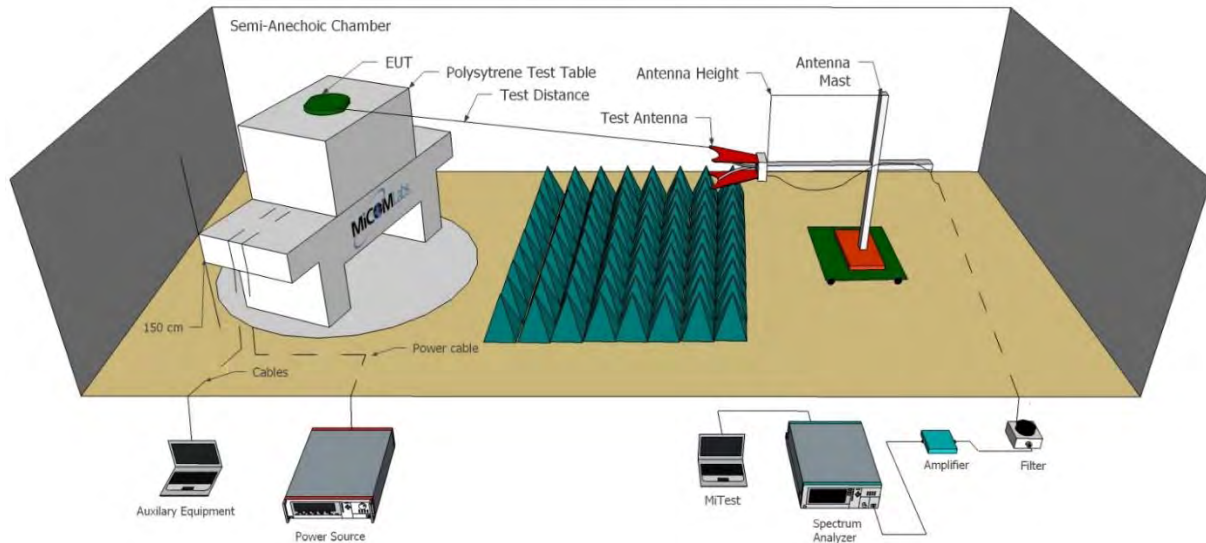

Radiated Emissions Below 1GHz Test Setup

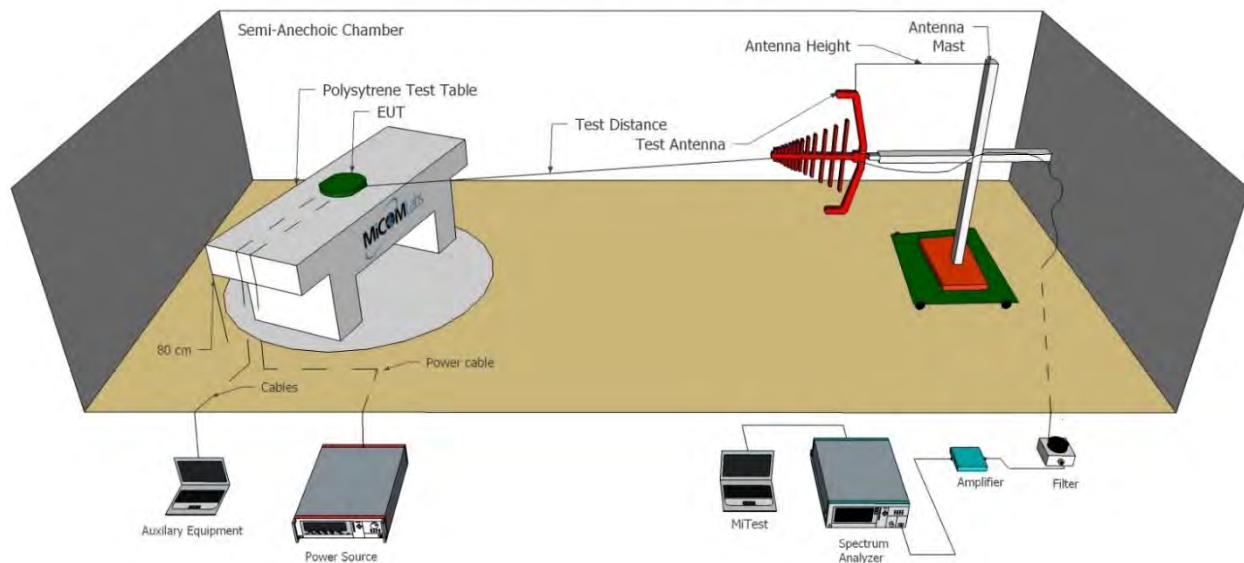


A full system calibration was performed on the test station and any resulting system losses (or gains) were considered in the production of all final measurement data.

| Asset# | Description                                       | Manufacturer         | Model#                                  | Serial#     | Calibration Due Date |
|--------|---|----------------------|---|-------------|----------------------|
| 170    | Video System Controller for Semi Anechoic Chamber | Panasonic            | WV-CU101                                | 04R08507    | Not Required         |
| 298    | 3M Radiated Emissions Chamber Maintenance Check   | MiCOM                | 3M Chamber                              | 298         | 21 Apr 2020          |
| 336    | Active Loop Antenna                               | Emco                 | 6502                                    | 00060498    | 29 Nov 2019          |
| 338    | Sunol 30 to 3000 MHz Antenna                      | Sunol                | JB3                                     | A052907     | 4 Apr 2020           |
| 378    | Rohde & Schwarz 40 GHz Receiver with Generator    | Rhode & Schwarz      | ESIB40                                  | 100107/040  | 12 Oct 2019          |
| 397    | Amp 10 - 2500MHz                                  | MiCOM Labs           | Amp 10 - 2500 MHz                       | NA          | 12 Apr 2020          |
| 399    | ETS 1-18 GHz Horn Antenna                         | ETS                  | 3117                                    | 00154575    | 12 Oct 2019          |
| 406    | Amplifier for Radiated Emissions                  | MiCOM Labs           | 40dB 1 to 18GHz Amp                     | 0406        | 12 Apr 2020          |
| 410    | Desktop Computer                                  | Dell                 | Inspiron 620                            | WS38        | Not Required         |
| 411    | Mast/Turntable Controller                         | Sunol Sciences       | SC98V                                   | 060199-1D   | Not Required         |
| 412    | USB to GPIB Interface                             | National Instruments | GPIB-USB HS                             | 11B8DC2     | Not Required         |
| 413    | Mast Controller                                   | Sunol Science        | TWR95-4                                 | 030801-3    | Not Required         |
| 415    | Turntable Controller                              | Sunol Sciences       | Turntable Controller                    | None        | Not Required         |
| 416    | Gigabit ethernet filter                           | ETS-Lingren          | Gigafoil 260366                         | None        | Not Required         |
| 447    | MiTest Rad Emissions Test Software                | MiCOM                | Rad Emissions Test Software Version 1.0 | 447         | Not Required         |
| 462    | Schwarzbeck cable from Antenna to Amplifier.      | Schwarzbeck          | AK 9513                                 | 462         | 9 Oct 2019           |
| 463    | Schwarzbeck cable from Amplifier to Bulkhead.     | Schwarzbeck          | AK 9513                                 | 463         | 9 Oct 2019           |
| 464    | Schwarzbeck cable from Bulkhead to Receiver       | Schwarzbeck          | AK 9513                                 | 464         | 9 Oct 2019           |
| 465    | Low Pass Filter DC-1000 MHz                       | Mini-Circuits        | NLP-1200+                               | VUU01901402 | 9 Oct 2019           |
| 480    | Cable - Bulkhead to Amp                           | SRC Haverhill        | 157-3050360                             | 480         | 24 Sep 2019          |
| 481    | Cable - Bulkhead to Receiver                      | SRC Haverhill        | 151-3050787                             | 481         | 24 Sep 2019          |
| 510    | Barometer/Thermometer                             | Control Company      | 68000-49                                | 170871375   | 11 Dec 2019          |
| 518    | Cable - Amp to Antenna                            | SRC Haverhill        | 157-3051574                             | 518         | 24 Sep 2019          |

### 7.3. ac Wireline Emissions

#### Test Setup – Power Input / Output Port

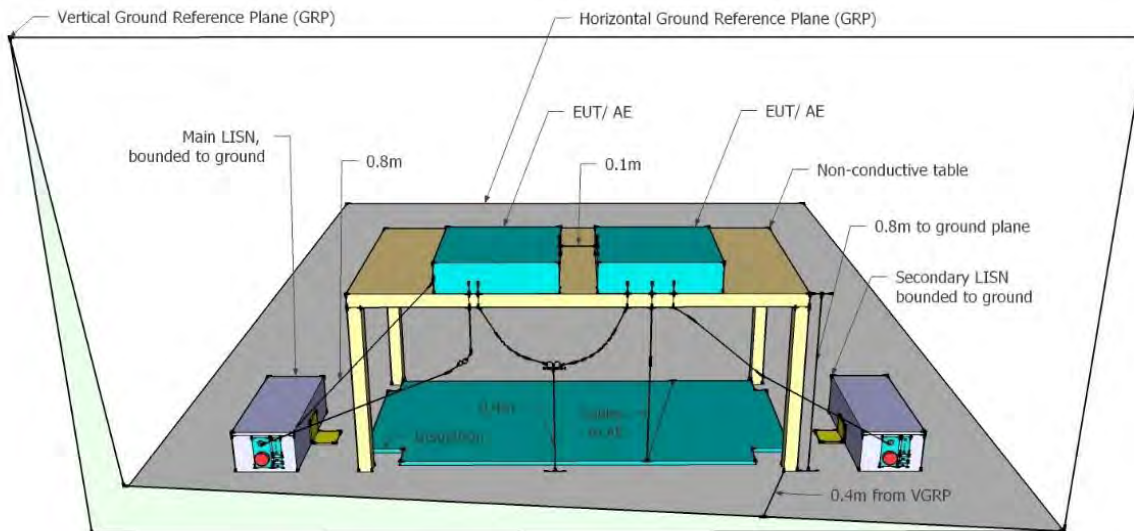

A full system calibration was performed on the test station and any resulting system losses (or gains) were taken into account in the production of all final measurement data.

| Asset# | Description                                   | Manufacturer           | Model#  | Serial#     | Calibration Due Date |
|--------|---|------------------------|---|-------------|----------------------|
| 184    | Pulse Limiter                                 | Rhode & Schwarz        | ESH3Z2  | 357.8810.52 | 6 Oct 2019           |
| 190    | LISN (two-line V-network)                     | Rhode & Schwarz        | ESH3Z5  | 836679/006  | 18 Oct 2019          |
| 378    | Rohde & Schwarz 40 GHz Receiver               | Rhode & Schwarz        | ESIB40  | 100107/040  | 12 Oct 2019          |
| 295    | Conducted Emissions Chamber Maintenance Check | MiCOM                  | Conducted Emissions Chamber                   | 295         | 19 Jun 2019          |
| 307    | BNC-CABLE                                     | Megaphase              | 1689 1GVT4                                    | 15F50B002   | 11 Sep 2019          |
| 316    | Dell desktop computer workstation             | Dell                   | Desktop                                       | WS04        | Not Required         |
| 372    | AC Variable PS                                | California Instruments | 1251P   | L06951      | Cal when used        |
| 388    | LISN (3 Phase) 9kHz - 30MHz                   | Rohde & Schwarz        | ESH2-Z5                                       | 892107/022  | 20 Oct 2019          |
| 496    | MiTest Conducted Emissions test software.     | MiCOM                  | Conducted Emissions Test Software Version 1.0 | 496         | Not Required         |
| 510    | Barometer/Thermometer                         | Control Company        | 68000-49                                      | 170871375   | 11 Dec 2019          |

## 8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.



The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

## 9. TEST RESULTS

### 9.1. 6 dB & 99% Bandwidth

| Conducted Test Conditions for 6 dB and 99% Bandwidth   |                                |                            |             |
|--|--------------------------------|----------------------------|-------------|
| <b>Standard:</b>   | FCC CFR 47:15.247              | <b>Ambient Temp. (°C):</b> | 24.0 - 27.5 |
| <b>Test Heading:</b>   | 6 dB and 99 % Bandwidth        | <b>Rel. Humidity (%):</b>  | 32 - 45     |
| <b>Standard Section(s):</b>  | 15.247 (a)(2)<br>RSS-247 5.2 a | <b>Pressure (mBars):</b>   | 999 - 1001  |
| <b>Reference Document(s):</b>  | See Normative References       |                            |             |
| <p>Test Procedure for 6 dB and 99% Bandwidth Measurement<br/>           The bandwidth at 6 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.</p> <p>Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.</p> <p>Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.</p> <p><b>Limits for 6 dB and 99% Bandwidth</b><br/>           (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:<br/>               (2) Systems using digital modulation techniques may operate in the 902-928 MHz and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.</p> |                                |                            |             |

**Equipment Configuration for 6 dB & 99% Bandwidth**

|                                |                |                                   |                |
|--------------------------------|----------------|-----------------------------------|----------------|
| <b>Variant:</b>                | 802.11b        | <b>Duty Cycle (%):</b>            | 99             |
| <b>Data Rate:</b>              | 1.00 MBit/s    | <b>Antenna Gain (dBi):</b>        | Not Applicable |
| <b>Modulation:</b>             | CCK            | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | GMH            |
| <b>Engineering Test Notes:</b> |                |                                   |                |

**Test Measurement Results**

| Test Frequency | Measured 6 dB Bandwidth (MHz) |                        |    |    | 6 dB Bandwidth (MHz) |        | Limit  | Lowest Margin |
|----------------|-------------------------------|------------------------|----|----|----------------------|--------|--------|---------------|
|                | Port(s)                       |                        |    |    | Highest              | Lowest |        |               |
| MHz            | a                             | b                      | c  | d  |                      |        |        |               |
| 2412.0         | <a href="#">10.020</a>        | <a href="#">10.020</a> | -- | -- | 10.020               | 10.020 | ≥500.0 | -9.52         |
| 2437.0         | <a href="#">10.020</a>        | <a href="#">10.020</a> | -- | -- | 10.020               | 10.020 | ≥500.0 | -9.52         |
| 2462.0         | <a href="#">10.020</a>        | <a href="#">10.020</a> | -- | -- | 10.020               | 10.020 | ≥500.0 | -9.52         |

| Test Frequency | Measured 99% Bandwidth (MHz) |                        |    |    | Maximum 99% Bandwidth (MHz) |  |  |
|----------------|------------------------------|------------------------|----|----|-----------------------------|--|--|
|                | Port(s)                      |                        |    |    |                             |  |  |
| MHz            | a                            | b                      | c  | d  |                             |  |  |
| 2412.0         | <a href="#">13.146</a>       | <a href="#">13.467</a> | -- | -- | 13.467                      |  |  |
| 2437.0         | <a href="#">13.467</a>       | <a href="#">13.467</a> | -- | -- | 13.467                      |  |  |
| 2462.0         | <a href="#">13.467</a>       | <a href="#">13.467</a> | -- | -- | 13.467                      |  |  |

| Traceability to Industry Recognized Test Methodologies |                                  |
|--|----------------------------------|
| Work Instruction:                                      | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty:                               | ±2.81 dB                         |

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for 6 dB & 99% Bandwidth**

|                                |                |                                   |                |
|--------------------------------|----------------|-----------------------------------|----------------|
| <b>Variant:</b>                | 802.11g        | <b>Duty Cycle (%):</b>            | 98             |
| <b>Data Rate:</b>              | 6.00 MBit/s    | <b>Antenna Gain (dBi):</b>        | Not Applicable |
| <b>Modulation:</b>             | OFDM           | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | GMH            |
| <b>Engineering Test Notes:</b> |                |                                   |                |

**Test Measurement Results**

| Test Frequency | Measured 6 dB Bandwidth (MHz) |                        |   |   | 6 dB Bandwidth (MHz) |        | Limit  | Lowest Margin |
|----------------|-------------------------------|------------------------|---|---|----------------------|--------|--------|---------------|
|                | Port(s)                       |                        |   |   | Highest              | Lowest |        |               |
| MHz            | a                             | b                      | c | d |                      |        |        |               |
| 2412.0         | <a href="#">16.353</a>        | <a href="#">16.353</a> |   |   | 16.353               | 16.353 | ≥500.0 | -15.85        |
| 2437.0         | <a href="#">16.433</a>        | <a href="#">16.433</a> |   |   | 16.433               | 16.433 | ≥500.0 | -15.93        |
| 2462.0         | <a href="#">16.433</a>        | <a href="#">16.433</a> |   |   | 16.433               | 16.433 | ≥500.0 | -15.93        |

| Test Frequency | Measured 99% Bandwidth (MHz) |                        |   |   | Maximum 99% Bandwidth (MHz) |  |  |
|----------------|------------------------------|------------------------|---|---|-----------------------------|--|--|
|                | Port(s)                      |                        |   |   |                             |  |  |
| MHz            | a                            | b                      | c | d |                             |  |  |
| 2412.0         | <a href="#">16.513</a>       | <a href="#">16.433</a> |   |   | 16.513                      |  |  |
| 2437.0         | <a href="#">16.994</a>       | <a href="#">16.593</a> |   |   | 16.994                      |  |  |
| 2462.0         | <a href="#">16.593</a>       | <a href="#">16.433</a> |   |   | 16.593                      |  |  |

| Traceability to Industry Recognized Test Methodologies |                                  |
|--|----------------------------------|
| Work Instruction:                                      | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty:                               | ±2.81 dB                         |

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for 6 dB & 99% Bandwidth**

|                                |                |                                   |                |
|--------------------------------|----------------|-----------------------------------|----------------|
| <b>Variant:</b>                | 802.11n HT-20  | <b>Duty Cycle (%):</b>            | 98             |
| <b>Data Rate:</b>              | 6.50 MBit/s    | <b>Antenna Gain (dBi):</b>        | Not Applicable |
| <b>Modulation:</b>             | OFDM           | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | GMH            |
| <b>Engineering Test Notes:</b> |                |                                   |                |

**Test Measurement Results**

| Test Frequency | Measured 6 dB Bandwidth (MHz) |                        |   |   | 6 dB Bandwidth (MHz) |        | Limit  | Lowest Margin |
|----------------|-------------------------------|------------------------|---|---|----------------------|--------|--------|---------------|
|                | Port(s)                       |                        |   |   | Highest              | Lowest |        |               |
| MHz            | a                             | b                      | c | d |                      |        |        |               |
| 2412.0         | <a href="#">17.555</a>        | <a href="#">17.555</a> |   |   | 17.555               | 17.555 | ≥500.0 | -17.06        |
| 2437.0         | <a href="#">17.555</a>        | <a href="#">17.555</a> |   |   | 17.555               | 17.555 | ≥500.0 | -17.06        |
| 2462.0         | <a href="#">17.555</a>        | <a href="#">17.555</a> |   |   | 17.555               | 17.555 | ≥500.0 | -17.06        |

| Test Frequency | Measured 99% Bandwidth (MHz) |                        |   |   | Maximum 99% Bandwidth (MHz) |  |  |
|----------------|------------------------------|------------------------|---|---|-----------------------------|--|--|
|                | Port(s)                      |                        |   |   |                             |  |  |
| MHz            | a                            | b                      | c | d |                             |  |  |
| 2412.0         | <a href="#">17.635</a>       | <a href="#">17.635</a> |   |   | 17.635                      |  |  |
| 2437.0         | <a href="#">17.715</a>       | <a href="#">17.715</a> |   |   | 17.715                      |  |  |
| 2462.0         | <a href="#">17.635</a>       | <a href="#">17.635</a> |   |   | 17.635                      |  |  |

| Traceability to Industry Recognized Test Methodologies |                                  |
|--|----------------------------------|
| Work Instruction:                                      | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty:                               | ±2.81 dB                         |

Note: click the links in the above matrix to view the graphical image (plot).



**Equipment Configuration for 6 dB & 99% Bandwidth**

|                                |                        |                                   |                |
|--------------------------------|------------------------|-----------------------------------|----------------|
| <b>Variant:</b>                | 802.11n HT-40          | <b>Duty Cycle (%):</b>            | 98             |
| <b>Data Rate:</b>              | 13.50 MBit/s           | <b>Antenna Gain (dBi):</b>        | Not Applicable |
| <b>Modulation:</b>             | OFDM                   | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable         | <b>Tested By:</b>                 | GMH            |
| <b>Engineering Test Notes:</b> | MAC ADDR: 204C0380E4BE |                                   |                |

**Test Measurement Results**

| Test Frequency<br>MHz | Measured 6 dB Bandwidth (MHz) |                        |   |   | 6 dB Bandwidth (MHz) |        | Limit  | Lowest Margin |
|-----------------------|-------------------------------|------------------------|---|---|----------------------|--------|--------|---------------|
|                       | Port(s)                       |                        |   |   | Highest              | Lowest | KHz    | MHz           |
|                       | a                             | b                      | c | d |                      |        |        |               |
| 2422.0                | <a href="#">35.752</a>        | <a href="#">36.072</a> |   |   | 36.072               | 35.752 | ≥500.0 | -35.25        |
| 2437.0                | <a href="#">35.591</a>        | <a href="#">35.912</a> |   |   | 35.912               | 35.591 | ≥500.0 | -35.09        |
| 2452.0                | <a href="#">35.752</a>        | <a href="#">35.752</a> |   |   | 35.752               | 35.752 | ≥500.0 | -35.25        |

| Test Frequency<br>MHz | Measured 99% Bandwidth (MHz) |                        |   |   | Maximum 99% Bandwidth (MHz) |  |  |
|-----------------------|------------------------------|------------------------|---|---|-----------------------------|--|--|
|                       | Port(s)                      |                        |   |   |                             |  |  |
|                       | a                            | b                      | c | d |                             |  |  |
| 2422.0                | <a href="#">36.232</a>       | <a href="#">36.232</a> |   |   | 36.232                      |  |  |
| 2437.0                | <a href="#">36.232</a>       | <a href="#">36.232</a> |   |   | 36.232                      |  |  |
| 2452.0                | <a href="#">36.232</a>       | <a href="#">36.232</a> |   |   | 36.232                      |  |  |

| Traceability to Industry Recognized Test Methodologies |                                  |
|--|----------------------------------|
| Work Instruction:                                      | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty:                               | ±2.81 dB                         |

Note: click the links in the above matrix to view the graphical image (plot).

## 9.2. Conducted Output Power

| Conducted Test Conditions for Fundamental Emission Output Power |  |                            |             |
|---|--|----------------------------|-------------|
| <b>Standard:</b>  | FCC CFR 47:15.247  | <b>Ambient Temp. (°C):</b> | 24.0 - 27.5 |
| <b>Test Heading:</b>  | Output Power   | <b>Rel. Humidity (%):</b>  | 32 - 45     |
| <b>Standard Section(s):</b>                                     | 15.247 (b) & (c), ANSI 63.10 Section 11.9.2.3.1, RSS-247 5.4 (d) | <b>Pressure (mBars):</b>   | 999 - 1001  |
| <b>Reference Document(s):</b>                                   | See Normative References   |                            |             |

Test Procedure for Fundamental Emission Output Power Measurement  
 In the case of average power measurements an average power sensor was utilized.

For peak power measurements the spectrum analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth.

Testing was performed under ambient conditions at nominal voltage only. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured, summed ( $\Sigma$ ) and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.  
 Supporting Information

Calculated Power =  $A + G + Y + 10 \log (1/x)$  dBm

A = Total Power [ $10 \cdot \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})$ ]

G = Antenna Gain

Y = Beamforming Gain

x = Duty Cycle (average power measurements only)

### Limits for Fundamental Emission Output Power

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following for non-frequency hopping systems:

(3) For systems using digital modulation in the 902-928 MHz and 2400-2483.5 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(iii) Fixed, point-to-point operation, as used in paragraphs (c)(1)(i) and (c)(1)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

(2) In addition to the provisions in paragraphs (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400-2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:

(i) Different information must be transmitted to each receiver.

(ii) If the transmitter employs an antenna system that emits multiple directional beams but does not do emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:

(A) The directional gain shall be calculated as the sum of  $10 \log$  (number of array elements or staves) plus the directional gain of the element or staff having the highest gain.

(B) A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.

(iii) If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.

(iv) Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.

**Equipment Configuration for Average Output Power**

|                                |                |                                   |                |
|--------------------------------|----------------|-----------------------------------|----------------|
| <b>Variant:</b>                | 802.11b        | <b>Duty Cycle (%):</b>            | 99.0           |
| <b>Data Rate:</b>              | 1.00 MBit/s    | <b>Antenna Gain (dBi):</b>        | 2.00           |
| <b>Modulation:</b>             | CCK            | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | GMH            |
| <b>Engineering Test Notes:</b> |                |                                   |                |

**Test Measurement Results**

| Test Frequency | Measured Output Power (dBm) |       |   |   | Calculated Total Power $\Sigma$ Port(s) | Limit | Margin | EUT Power Setting |
|----------------|-----------------------------|-------|---|---|---|-------|--------|-------------------|
|                | Port(s)                     |       |   |   |   |       |        |                   |
| MHz            | a                           | b     | c | d | dBm                                     | dBm   | dB     |                   |
| 2412.0         | 16.27                       | 18.64 |   |   | 20.63                                   | 30.00 | -9.37  | 18.00             |
| 2437.0         | 17.31                       | 17.46 |   |   | 20.40                                   | 30.00 | -9.60  | 18.00             |
| 2462.0         | 17.24                       | 17.38 |   |   | 20.32                                   | 30.00 | -9.68  | 18.00             |

| Traceability to Industry Recognized Test Methodologies |                                 |
|--|---------------------------------|
| Work Instruction:                                      | WI-01 MEASURING RF OUTPUT POWER |
| Measurement Uncertainty:                               | $\pm 1.33$ dB                   |

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

**Equipment Configuration for Average Output Power**

|                                |                |                                   |                |
|--------------------------------|----------------|-----------------------------------|----------------|
| <b>Variant:</b>                | 802.11g        | <b>Duty Cycle (%):</b>            | 98.0           |
| <b>Data Rate:</b>              | 6.00 MBit/s    | <b>Antenna Gain (dBi):</b>        | 2.00           |
| <b>Modulation:</b>             | OFDM           | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | GMH            |
| <b>Engineering Test Notes:</b> |                |                                   |                |

**Test Measurement Results**

| Test Frequency | Measured Output Power (dBm) |       |   |   | Calculated Total Power $\Sigma$ Port(s) | Limit | Margin | EUT Power Setting |
|----------------|-----------------------------|-------|---|---|---|-------|--------|-------------------|
|                | Port(s)                     |       |   |   |   |       |        |                   |
| MHz            | a                           | b     | c | d | dBm                                     | dBm   | dB     |                   |
| 2412.0         | 16.21                       | 16.27 |   |   | 19.25                                   | 30.00 | -10.75 | 16.00             |
| 2437.0         | 16.60                       | 18.33 |   |   | 20.56                                   | 30.00 | -9.44  | 18.00             |
| 2462.0         | 16.25                       | 16.26 |   |   | 19.27                                   | 30.00 | -10.73 | 16.00             |

| Traceability to Industry Recognized Test Methodologies |                                 |
|--|---------------------------------|
| Work Instruction:                                      | WI-01 MEASURING RF OUTPUT POWER |
| Measurement Uncertainty:                               | $\pm 1.33$ dB                   |

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

**Equipment Configuration for Average Output Power**

|                                |                |                                   |      |
|--------------------------------|----------------|-----------------------------------|------|
| <b>Variant:</b>                | 802.11n HT-20  | <b>Duty Cycle (%):</b>            | 98.0 |
| <b>Data Rate:</b>              | 6.50 MBit/s    | <b>Antenna Gain (dBi):</b>        | 2.00 |
| <b>Modulation:</b>             | OFDM           | <b>Beam Forming Gain (Y)(dB):</b> | 5.00 |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | GMH  |
| <b>Engineering Test Notes:</b> |                |                                   |      |

**Test Measurement Results**

| Test Frequency | Measured Output Power (dBm) |       |   |   | Calculated Total Power $\Sigma$ Port(s) | Limit | Margin | EUT Power Setting |
|----------------|-----------------------------|-------|---|---|---|-------|--------|-------------------|
|                | Port(s)                     |       |   |   |   |       |        |                   |
| MHz            | a                           | b     | c | d | dBm                                     | dBm   | dB     |                   |
| 2412.0         | 15.32                       | 15.43 |   |   | 18.39                                   | 29.00 | -10.61 | 15.00             |
| 2437.0         | 18.41                       | 18.38 |   |   | 21.41                                   | 29.00 | -7.59  | 18.00             |
| 2462.0         | 14.45                       | 14.48 |   |   | 17.48                                   | 29.00 | -11.52 | 14.00             |

| Traceability to Industry Recognized Test Methodologies |                                 |
|--|---------------------------------|
| Work Instruction:                                      | WI-01 MEASURING RF OUTPUT POWER |
| Measurement Uncertainty:                               | $\pm 1.33$ dB                   |

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

**Equipment Configuration for Average Output Power**

|   |                |                                   |      |
|---|----------------|-----------------------------------|------|
| <b>Variant:</b>                                       | 802.11n HT-40  | <b>Duty Cycle (%):</b>            | 98.0 |
| <b>Data Rate:</b>                                     | 13.50 MBit/s   | <b>Antenna Gain (dBi):</b>        | 2.00 |
| <b>Modulation:</b>                                    | OFDM           | <b>Beam Forming Gain (Y)(dB):</b> | 5.00 |
| <b>TPC:</b>   | Not Applicable | <b>Tested By:</b>                 | GMH  |
| <b>Engineering Test Notes:</b> MAC ADDR: 204C0380E4BE |                |                                   |      |

**Test Measurement Results**

| Test Frequency | Measured Output Power (dBm) |       |   |   | Calculated Total Power $\Sigma$ Port(s) | Limit | Margin | EUT Power Setting |
|----------------|-----------------------------|-------|---|---|---|-------|--------|-------------------|
|                | Port(s)                     |       |   |   |   |       |        |                   |
| MHz            | a                           | b     | c | d | dBm                                     | dBm   | dB     |                   |
| 2422.0         | 13.31                       | 13.35 |   |   | 16.34                                   | 29.00 | -12.66 | 13.00             |
| 2437.0         | 18.28                       | 18.24 |   |   | 21.27                                   | 29.00 | -7.73  | 18.00             |
| 2452.0         | 12.43                       | 12.40 |   |   | 15.43                                   | 29.00 | -13.57 | 12.00             |

| Traceability to Industry Recognized Test Methodologies |                                 |
|--|---------------------------------|
| Work Instruction:                                      | WI-01 MEASURING RF OUTPUT POWER |
| Measurement Uncertainty:                               | $\pm 1.33$ dB                   |

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

### 9.3. Power Spectral Density

| Conducted Test Conditions for Power Spectral Density |                             |                            |             |
|--|-----------------------------|----------------------------|-------------|
| <b>Standard:</b>                                     | FCC CFR 47:15.247           | <b>Ambient Temp. (°C):</b> | 24.0 - 27.5 |
| <b>Test Heading:</b>                                 | Power Spectral Density      | <b>Rel. Humidity (%):</b>  | 32 - 45     |
| <b>Standard Section(s):</b>                          | 15.247 (e)<br>RSS-247 5.2 b | <b>Pressure (mBars):</b>   | 999 - 1001  |
| <b>Reference Document(s):</b>                        | See Normative References    |                            |             |

#### Test Procedure for Power Spectral Density

The transmitter output was connected to a spectrum analyzer and the measured made in a 3 kHz resolution bandwidth using the analyzer auto-coupled sweep-time. A peak value was found over the full emission bandwidth and the spectrum downloaded for post processing purposes.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. The Peak Power Spectral Density is the highest level found across the emission bandwidth. With multiple antenna port measurements the numerical analyzer data from each port is summed (à) and a link to this additional graphic is provided.

Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with multiple transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were post processed and the resulting numerical and graphical data presented.

#### NOTE:

It may be observed that the spectrum in some antenna port plots break the limit line however this in itself does NOT constitute a failure. In all cases a spectrum summation plot is provided in order to prove compliance. A failure occurs only after the summation of all spectrum plots have been summed and are found to be greater than the limit line.

#### Supporting Information

Calculated Power = A + 10 log (1/x) dBm

A = Total Power Spectral Density [10 Log<sub>10</sub> (10<sup>a/10</sup> + 10<sup>b/10</sup> + 10<sup>c/10</sup> + 10<sup>d/10</sup>)]

x = Duty Cycle

#### Limits Power Spectral Density

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.



**Equipment Configuration for Power Spectral Density - Average**

|                                |                |                                   |                |
|--------------------------------|----------------|-----------------------------------|----------------|
| <b>Variant:</b>                | 802.11b        | <b>Duty Cycle (%):</b>            | 99.0           |
| <b>Data Rate:</b>              | 1.00 MBit/s    | <b>Antenna Gain (dBi):</b>        | 2.00           |
| <b>Modulation:</b>             | CCK            | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | GMH            |
| <b>Engineering Test Notes:</b> |                |                                   |                |

**Test Measurement Results**

| Test Frequency | Measured Power Spectral Density |                         |   |   | Amplitude Summation + DCCF (+0.04 dB) | Limit    | Margin |
|----------------|---------------------------------|-------------------------|---|---|---------------------------------------|----------|--------|
|                | Port(s) (dBm/3KHz)              |                         |   |   |                                       |          |        |
| MHz            | a                               | b                       | c | d | dBm/3KHz                              | dBm/3KHz | dB     |
| 2412.0         | <a href="#">-19.159</a>         | <a href="#">-16.879</a> |   |   | <a href="#">-14.833</a>               | 8.0      | -22.8  |
| 2437.0         | <a href="#">-18.325</a>         | <a href="#">-18.035</a> |   |   | <a href="#">-15.154</a>               | 8.0      | -23.2  |
| 2462.0         | <a href="#">-18.734</a>         | <a href="#">-18.095</a> |   |   | <a href="#">-15.659</a>               | 8.0      | -23.7  |

**Traceability to Industry Recognized Test Methodologies**

|                          |                                  |
|--------------------------|----------------------------------|
| Work Instruction:        | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB                         |

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Power Spectral Density - Average**

|                                |                |                                   |                |
|--------------------------------|----------------|-----------------------------------|----------------|
| <b>Variant:</b>                | 802.11g        | <b>Duty Cycle (%):</b>            | 98.0           |
| <b>Data Rate:</b>              | 6.00 MBit/s    | <b>Antenna Gain (dBi):</b>        | 2.00           |
| <b>Modulation:</b>             | OFDM           | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | GMH            |
| <b>Engineering Test Notes:</b> |                |                                   |                |

**Test Measurement Results**

| Test Frequency | Measured Power Spectral Density |                         |   |   | Amplitude Summation + DCCF (+0.09 dB) | Limit    | Margin |
|----------------|---------------------------------|-------------------------|---|---|---------------------------------------|----------|--------|
|                | Port(s) (dBm/3KHz)              |                         |   |   |                                       |          |        |
| MHz            | a                               | b                       | c | d | dBm/3KHz                              | dBm/3KHz | dB     |
| 2412.0         | <a href="#">-21.054</a>         | <a href="#">-20.712</a> |   |   | <a href="#">-17.833</a>               | 8.0      | -25.8  |
| 2437.0         | <a href="#">-20.590</a>         | <a href="#">-19.067</a> |   |   | <a href="#">-16.899</a>               | 8.0      | -24.9  |
| 2462.0         | <a href="#">-20.779</a>         | <a href="#">-20.898</a> |   |   | <a href="#">-17.827</a>               | 8.0      | -25.8  |

**Traceability to Industry Recognized Test Methodologies**

|                          |                                  |
|--------------------------|----------------------------------|
| Work Instruction:        | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB                         |

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Power Spectral Density - Average**

|                                |                |                                   |      |
|--------------------------------|----------------|-----------------------------------|------|
| <b>Variant:</b>                | 802.11n HT-20  | <b>Duty Cycle (%):</b>            | 98.0 |
| <b>Data Rate:</b>              | 6.50 MBit/s    | <b>Antenna Gain (dBi):</b>        | 2.00 |
| <b>Modulation:</b>             | OFDM           | <b>Beam Forming Gain (Y)(dB):</b> | 5.00 |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | GMH  |
| <b>Engineering Test Notes:</b> |                |                                   |      |

**Test Measurement Results**

| Test Frequency | Measured Power Spectral Density |                         |   |   | Amplitude Summation + DCCF (+0.09 dB) | Limit    | Margin |
|----------------|---------------------------------|-------------------------|---|---|---------------------------------------|----------|--------|
|                | Port(s) (dBm/3KHz)              |                         |   |   |                                       |          |        |
| MHz            | a                               | b                       | c | d | dBm/3KHz                              | dBm/3KHz | dB     |
| 2412.0         | <a href="#">-21.987</a>         | <a href="#">-21.717</a> |   |   | <a href="#">-18.921</a>               | 8.0      | -26.9  |
| 2437.0         | <a href="#">-18.325</a>         | <a href="#">-18.777</a> |   |   | <a href="#">-15.842</a>               | 8.0      | -23.9  |
| 2462.0         | <a href="#">-23.039</a>         | <a href="#">-22.661</a> |   |   | <a href="#">-19.982</a>               | 8.0      | -28.0  |

**Traceability to Industry Recognized Test Methodologies**

|                          |                                  |
|--------------------------|----------------------------------|
| Work Instruction:        | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB                         |

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Power Spectral Density - Average**

|                                |                |                                   |      |
|--------------------------------|----------------|-----------------------------------|------|
| <b>Variant:</b>                | 802.11n HT-40  | <b>Duty Cycle (%):</b>            | 98.0 |
| <b>Data Rate:</b>              | 13.50 MBit/s   | <b>Antenna Gain (dBi):</b>        | 2.00 |
| <b>Modulation:</b>             | OFDM           | <b>Beam Forming Gain (Y)(dB):</b> | 5.00 |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | GMH  |
| <b>Engineering Test Notes:</b> |                |                                   |      |

**Test Measurement Results**

| Test Frequency | Measured Power Spectral Density |                         |   |   | Amplitude Summation + DCCF (+0.09 dB) | Limit    | Margin |
|----------------|---------------------------------|-------------------------|---|---|---------------------------------------|----------|--------|
|                | Port(s) (dBm/3KHz)              |                         |   |   |                                       |          |        |
| MHz            | a                               | b                       | c | d | dBm/3KHz                              | dBm/3KHz | dB     |
| 2422.0         | <a href="#">-27.702</a>         | <a href="#">-27.211</a> |   |   | <a href="#">-24.434</a>               | 8.0      | -32.4  |
| 2437.0         | <a href="#">-21.879</a>         | <a href="#">-22.208</a> |   |   | <a href="#">-19.145</a>               | 8.0      | -27.2  |
| 2452.0         | <a href="#">-26.943</a>         | <a href="#">-27.543</a> |   |   | <a href="#">-24.163</a>               | 8.0      | -32.2  |

**Traceability to Industry Recognized Test Methodologies**

|                          |                                  |
|--------------------------|----------------------------------|
| Work Instruction:        | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB                         |

DCCF - Duty Cycle Correction Factor

Note: click the links in the above matrix to view the graphical image (plot).

## 9.4. Emissions

### 9.4.1. Conducted Emissions

#### 9.4.1.1. Conducted Spurious Emissions

| Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions |  |                            |             |
|--|--|----------------------------|-------------|
| <b>Standard:</b>   | FCC CFR 47:15.247  | <b>Ambient Temp. (°C):</b> | 24.0 - 27.5 |
| <b>Test Heading:</b>   | Max Unwanted Emission Levels   | <b>Rel. Humidity (%):</b>  | 32 - 45     |
| <b>Standard Section(s):</b>  | 15.247 (d), KDB 558074 D01,<br>ANSI 63.10 Section 11.11<br>RSS-247 Section 5.5 | <b>Pressure (mBars):</b>   | 999 - 1001  |
| <b>Reference Document(s):</b>  | See Normative References   |                            |             |

#### Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement

Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 30 dBc (average detector) or 20 dBc (peak detector) below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

#### Limits Transmitter Conducted Spurious and Band-Edge Emissions

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

**Equipment Configuration for Conducted Spurious Emissions - Peak**

|                                |                |                               |                |
|--------------------------------|----------------|-------------------------------|----------------|
| <b>Variant:</b>                | 802.11b        | <b>Duty Cycle (%):</b>        | 99             |
| <b>Data Rate:</b>              | 1.00 MBit/s    | <b>Antenna Gain (dBi):</b>    | Not Applicable |
| <b>Modulation:</b>             | CCK            | <b>Beam Forming Gain (Y):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>             | GMH            |
| <b>Engineering Test Notes:</b> |                |                               |                |

**Test Measurement Results**

| Test Frequency         | Frequency Range | Conducted Spurious Emissions - Peak (dBm) |        |                         |        |        |       |        |       |
|------------------------|-----------------|---|--------|-------------------------|--------|--------|-------|--------|-------|
|                        |                 | Port a                                    |        | Port b                  |        | Port c |       | Port d |       |
| MHz                    | MHz             | SE  | Limit  | SE                      | Limit  | SE     | Limit | SE     | Limit |
| <a href="#">2412.0</a> | 30.0 - 26000.0  | <a href="#">-41.768</a>                   | -25.65 | <a href="#">-43.267</a> | -23.78 |        |       |        |       |
| <a href="#">2437.0</a> | 30.0 - 26000.0  | <a href="#">-40.776</a>                   | -25.39 | <a href="#">-42.426</a> | -24.90 |        |       |        |       |
| <a href="#">2462.0</a> | 30.0 - 26000.0  | <a href="#">-40.660</a>                   | -25.58 | <a href="#">-41.425</a> | -26.25 |        |       |        |       |

**Traceability to Industry Recognized Test Methodologies**

|                          |   |
|--------------------------|---|
| Work Instruction:        | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty: | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB     |

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Conducted Spurious Emissions - Peak**

|                                |                |                               |                |
|--------------------------------|----------------|-------------------------------|----------------|
| <b>Variant:</b>                | 802.11g        | <b>Duty Cycle (%):</b>        | 98             |
| <b>Data Rate:</b>              | 6.00 MBit/s    | <b>Antenna Gain (dBi):</b>    | Not Applicable |
| <b>Modulation:</b>             | OFDM           | <b>Beam Forming Gain (Y):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>             | GMH            |
| <b>Engineering Test Notes:</b> |                |                               |                |

**Test Measurement Results**

| Test Frequency | Frequency Range | Conducted Spurious Emissions - Peak (dBm) |        |                         |        |        |       |        |       |
|----------------|-----------------|---|--------|-------------------------|--------|--------|-------|--------|-------|
|                |                 | Port a                                    |        | Port b                  |        | Port c |       | Port d |       |
| MHz            | MHz             | SE  | Limit  | SE                      | Limit  | SE     | Limit | SE     | Limit |
| <b>2412.0</b>  | 30.0 - 26000.0  | <a href="#">-42.167</a>                   | -29.45 | <a href="#">-43.035</a> | -27.78 |        |       |        |       |
| <b>2437.0</b>  | 30.0 - 26000.0  | <a href="#">-40.969</a>                   | -27.08 | <a href="#">-42.365</a> | -26.58 |        |       |        |       |
| <b>2462.0</b>  | 30.0 - 26000.0  | <a href="#">-40.670</a>                   | -30.64 | <a href="#">-41.952</a> | -29.98 |        |       |        |       |

**Traceability to Industry Recognized Test Methodologies**

|                          |   |
|--------------------------|---|
| Work Instruction:        | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty: | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB     |

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Conducted Spurious Emissions - Peak**

|                                |                |                               |                |
|--------------------------------|----------------|-------------------------------|----------------|
| <b>Variant:</b>                | 802.11n HT-20  | <b>Duty Cycle (%):</b>        | 98             |
| <b>Data Rate:</b>              | 6.50 MBit/s    | <b>Antenna Gain (dBi):</b>    | Not Applicable |
| <b>Modulation:</b>             | OFDM           | <b>Beam Forming Gain (Y):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>             | GMH            |
| <b>Engineering Test Notes:</b> |                |                               |                |

**Test Measurement Results**

| Test Frequency         | Frequency Range | Conducted Spurious Emissions - Peak (dBm) |        |                         |        |        |       |        |       |
|------------------------|-----------------|---|--------|-------------------------|--------|--------|-------|--------|-------|
|                        |                 | Port a                                    |        | Port b                  |        | Port c |       | Port d |       |
| MHz                    | MHz             | SE  | Limit  | SE                      | Limit  | SE     | Limit | SE     | Limit |
| <a href="#">2412.0</a> | 30.0 - 26000.0  | <a href="#">-42.395</a>                   | -28.60 | <a href="#">-42.795</a> | -30.32 |        |       |        |       |
| <a href="#">2437.0</a> | 30.0 - 26000.0  | <a href="#">-40.863</a>                   | -27.59 | <a href="#">-42.865</a> | -25.25 |        |       |        |       |
| <a href="#">2462.0</a> | 30.0 - 26000.0  | <a href="#">-39.967</a>                   | -31.27 | <a href="#">-41.669</a> | -30.57 |        |       |        |       |

| Traceability to Industry Recognized Test Methodologies |   |
|--|---|
| Work Instruction:                                      | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty:                               | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB     |

Note: click the links in the above matrix to view the graphical image (plot).



**Equipment Configuration for Conducted Spurious Emissions - Peak**

|   |                |                               |                |
|---|----------------|-------------------------------|----------------|
| <b>Variant:</b>                                       | 802.11n HT-40  | <b>Duty Cycle (%):</b>        | 98             |
| <b>Data Rate:</b>                                     | 13.50 MBit/s   | <b>Antenna Gain (dBi):</b>    | Not Applicable |
| <b>Modulation:</b>                                    | OFDM           | <b>Beam Forming Gain (Y):</b> | Not Applicable |
| <b>TPC:</b>   | Not Applicable | <b>Tested By:</b>             | GMH            |
| <b>Engineering Test Notes:</b> MAC ADDR: 204C0380E4BE |                |                               |                |

**Test Measurement Results**

| Test Frequency         | Frequency Range | Conducted Spurious Emissions - Peak (dBm) |        |                         |        |        |       |        |       |
|------------------------|-----------------|---|--------|-------------------------|--------|--------|-------|--------|-------|
|                        |                 | Port a                                    |        | Port b                  |        | Port c |       | Port d |       |
| MHz                    | MHz             | SE  | Limit  | SE                      | Limit  | SE     | Limit | SE     | Limit |
| <a href="#">2422.0</a> | 30.0 - 26000.0  | <a href="#">-41.211</a>                   | -32.46 | <a href="#">-43.067</a> | -32.18 |        |       |        |       |
| <a href="#">2437.0</a> | 30.0 - 26000.0  | <a href="#">-41.327</a>                   | -29.08 | <a href="#">-42.552</a> | -27.20 |        |       |        |       |
| <a href="#">2452.0</a> | 30.0 - 26000.0  | <a href="#">-40.970</a>                   | -33.70 | <a href="#">-41.947</a> | -32.80 |        |       |        |       |

**Traceability to Industry Recognized Test Methodologies**

|                          |   |
|--------------------------|---|
| Work Instruction:        | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty: | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB     |

Note: click the links in the above matrix to view the graphical image (plot).

### 9.4.1.2. Conducted Band-Edge Emissions

|   |
|---|
| <b>Equipment Configuration for Conducted Low Band-Edge Emissions - Peak</b> |
|---|

|                                |  |
|--------------------------------|--|
| <b>Variant:</b> 802.11b        | <b>Duty Cycle (%):</b> 99.0                      |
| <b>Data Rate:</b> 1.00 MBit/s  | <b>Antenna Gain (dBi):</b> Not Applicable        |
| <b>Modulation:</b> CCK         | <b>Beam Forming Gain (Y)(dB):</b> Not Applicable |
| <b>TPC:</b> Not Applicable     | <b>Tested By:</b> GMH                            |
| <b>Engineering Test Notes:</b> |  |

|                                 |
|---------------------------------|
| <b>Test Measurement Results</b> |
|---------------------------------|

| <b>Channel Frequency:</b>    | 2412.0 MHz                  |                  |                    |                 |                     |        |
|------------------------------|-----------------------------|------------------|--------------------|-----------------|---------------------|--------|
| <b>Band-Edge Frequency:</b>  | 2400.0 MHz                  |                  |                    |                 |                     |        |
| <b>Test Frequency Range:</b> | 2350.0 - 2422.0 MHz         |                  |                    |                 |                     |        |
| Port(s)                      | Band-Edge Markers and Limit |                  |                    | Revised Limit   |                     | Margin |
|                              | M1 Amplitude (dBm)          | Plot Limit (dBm) | M2 Frequency (MHz) | Amplitude (dBm) | M2A Frequency (MHz) | (MHz)  |
| a                            | <a href="#">-45.80</a>      | -25.33           | 2403.50            |                 |                     | -3.500 |
| b                            | <a href="#">-45.61</a>      | -22.86           | 2403.20            |                 |                     | -3.200 |

|   |
|---|
| <b>Traceability to Industry Recognized Test Methodologies</b> |
|---|

|                                 |   |
|---------------------------------|---|
| <b>Work Instruction:</b>        | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| <b>Measurement Uncertainty:</b> | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB     |

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Conducted Low Band-Edge Emissions - Peak**

|                                |                |                                   |                |
|--------------------------------|----------------|-----------------------------------|----------------|
| <b>Variant:</b>                | 802.11g        | <b>Duty Cycle (%):</b>            | 98.0           |
| <b>Data Rate:</b>              | 6.00 MBit/s    | <b>Antenna Gain (dBi):</b>        | Not Applicable |
| <b>Modulation:</b>             | OFDM           | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | GMH            |
| <b>Engineering Test Notes:</b> |                |                                   |                |

**Test Measurement Results**

| <b>Channel Frequency:</b>    | 2412.0 MHz                  |                  |                    |                 |                     |              |
|------------------------------|-----------------------------|------------------|--------------------|-----------------|---------------------|--------------|
| <b>Band-Edge Frequency:</b>  | 2400.0 MHz                  |                  |                    |                 |                     |              |
| <b>Test Frequency Range:</b> | 2350.0 - 2422.0 MHz         |                  |                    |                 |                     |              |
| Port(s)                      | Band-Edge Markers and Limit |                  |                    | Revised Limit   |                     | Margin (MHz) |
|                              | M1 Amplitude (dBm)          | Plot Limit (dBm) | M2 Frequency (MHz) | Amplitude (dBm) | M2A Frequency (MHz) |              |
| a                            | <a href="#">-34.63</a>      | -26.48           | 2401.80            |                 |                     | -1.800       |
| b                            | <a href="#">-34.86</a>      | -26.21           | 2401.80            |                 |                     | -1.800       |

**Traceability to Industry Recognized Test Methodologies**

|                                 |   |
|---------------------------------|---|
| <b>Work Instruction:</b>        | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| <b>Measurement Uncertainty:</b> | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB     |

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Conducted Low Band-Edge Emissions - Peak**

|                                |                |                                   |                |
|--------------------------------|----------------|-----------------------------------|----------------|
| <b>Variant:</b>                | 802.11n HT-20  | <b>Duty Cycle (%):</b>            | 98.0           |
| <b>Data Rate:</b>              | 6.50 MBit/s    | <b>Antenna Gain (dBi):</b>        | Not Applicable |
| <b>Modulation:</b>             | OFDM           | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | GMH            |
| <b>Engineering Test Notes:</b> |                |                                   |                |

**Test Measurement Results**

| <b>Channel Frequency:</b>    | 2412.0 MHz                  |                  |                    |                 |                     |              |
|------------------------------|-----------------------------|------------------|--------------------|-----------------|---------------------|--------------|
| <b>Band-Edge Frequency:</b>  | 2400.0 MHz                  |                  |                    |                 |                     |              |
| <b>Test Frequency Range:</b> | 2350.0 - 2422.0 MHz         |                  |                    |                 |                     |              |
| Port(s)                      | Band-Edge Markers and Limit |                  |                    | Revised Limit   |                     | Margin (MHz) |
|                              | M1 Amplitude (dBm)          | Plot Limit (dBm) | M2 Frequency (MHz) | Amplitude (dBm) | M2A Frequency (MHz) |              |
| a                            | <a href="#">-35.91</a>      | -27.68           | 2401.50            |                 |                     | -1.500       |
| b                            | <a href="#">-30.84</a>      | -27.34           | 2401.50            |                 |                     | -1.500       |

**Traceability to Industry Recognized Test Methodologies**

|                                 |   |
|---------------------------------|---|
| <b>Work Instruction:</b>        | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| <b>Measurement Uncertainty:</b> | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB     |

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Conducted Low Band-Edge Emissions - Peak**

|   |                |                                   |                |
|---|----------------|-----------------------------------|----------------|
| <b>Variant:</b>                                       | 802.11n HT-40  | <b>Duty Cycle (%):</b>            | 98.0           |
| <b>Data Rate:</b>                                     | 13.50 MBit/s   | <b>Antenna Gain (dBi):</b>        | Not Applicable |
| <b>Modulation:</b>                                    | OFDM           | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>   | Not Applicable | <b>Tested By:</b>                 | GMH            |
| <b>Engineering Test Notes:</b> MAC ADDR: 204C0380E4BE |                |                                   |                |

**Test Measurement Results**

| <b>Channel Frequency:</b>    | 2422.0 MHz                  |                  |                    |                 |                     |              |
|------------------------------|-----------------------------|------------------|--------------------|-----------------|---------------------|--------------|
| <b>Band-Edge Frequency:</b>  | 2400.0 MHz                  |                  |                    |                 |                     |              |
| <b>Test Frequency Range:</b> | 2292.0 - 2442.0 MHz         |                  |                    |                 |                     |              |
| Port(s)                      | Band-Edge Markers and Limit |                  |                    | Revised Limit   |                     | Margin (MHz) |
|                              | M1 Amplitude (dBm)          | Plot Limit (dBm) | M2 Frequency (MHz) | Amplitude (dBm) | M2A Frequency (MHz) |              |
| a                            | <a href="#">-39.57</a>      | -32.15           | 2401.70            |                 |                     | -1.700       |
| b                            | <a href="#">-39.20</a>      | -32.04           | 2402.00            |                 |                     | -2.000       |

|   |   |
|---|---|
| <b>Traceability to Industry Recognized Test Methodologies</b> |   |
| Work Instruction:   | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty:                                      | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB     |

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Conducted High Band-Edge Emissions - Peak**

|                                |                |                                   |                |
|--------------------------------|----------------|-----------------------------------|----------------|
| <b>Variant:</b>                | 802.11b        | <b>Duty Cycle (%):</b>            | 99.0           |
| <b>Data Rate:</b>              | 1.00 MBit/s    | <b>Antenna Gain (dBi):</b>        | Not Applicable |
| <b>Modulation:</b>             | CCK            | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | GMH            |
| <b>Engineering Test Notes:</b> |                |                                   |                |

**Test Measurement Results**

| <b>Channel Frequency:</b>    | 2462.0 MHz                  |                  |                    |                 |                     |              |
|------------------------------|-----------------------------|------------------|--------------------|-----------------|---------------------|--------------|
| <b>Band-Edge Frequency:</b>  | 2483.5 MHz                  |                  |                    |                 |                     |              |
| <b>Test Frequency Range:</b> | 2452.0 - 2524.0 MHz         |                  |                    |                 |                     |              |
| Port(s)                      | Band-Edge Markers and Limit |                  |                    | Revised Limit   |                     | Margin (MHz) |
|                              | M3 Amplitude (dBm)          | Plot Limit (dBm) | M2 Frequency (MHz) | Amplitude (dBm) | M2A Frequency (MHz) |              |
| a                            | <a href="#">-47.86</a>      | -24.51           | 2470.50            |                 |                     | -13.000      |
| b                            | <a href="#">-46.63</a>      | -24.33           | 2470.50            |                 |                     | -13.000      |

**Traceability to Industry Recognized Test Methodologies**

|                                 |   |
|---------------------------------|---|
| <b>Work Instruction:</b>        | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| <b>Measurement Uncertainty:</b> | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB     |

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Conducted High Band-Edge Emissions - Peak**

|                                |                |                                   |                |
|--------------------------------|----------------|-----------------------------------|----------------|
| <b>Variant:</b>                | 802.11g        | <b>Duty Cycle (%):</b>            | 98.0           |
| <b>Data Rate:</b>              | 6.00 MBit/s    | <b>Antenna Gain (dBi):</b>        | Not Applicable |
| <b>Modulation:</b>             | OFDM           | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable | <b>Tested By:</b>                 | GMH            |
| <b>Engineering Test Notes:</b> |                |                                   |                |

**Test Measurement Results**

| <b>Channel Frequency:</b>    | 2462.0 MHz                  |                  |                    |                 |                     |              |
|------------------------------|-----------------------------|------------------|--------------------|-----------------|---------------------|--------------|
| <b>Band-Edge Frequency:</b>  | 2483.5 MHz                  |                  |                    |                 |                     |              |
| <b>Test Frequency Range:</b> | 2452.0 - 2524.0 MHz         |                  |                    |                 |                     |              |
| Port(s)                      | Band-Edge Markers and Limit |                  |                    | Revised Limit   |                     | Margin (MHz) |
|                              | M3 Amplitude (dBm)          | Plot Limit (dBm) | M2 Frequency (MHz) | Amplitude (dBm) | M2A Frequency (MHz) |              |
| a                            | <a href="#">-38.27</a>      | -26.83           | 2471.80            |                 |                     | -11.700      |
| b                            | <a href="#">-38.77</a>      | -26.41           | 2471.80            |                 |                     | -11.700      |

**Traceability to Industry Recognized Test Methodologies**

|                                 |   |
|---------------------------------|---|
| <b>Work Instruction:</b>        | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| <b>Measurement Uncertainty:</b> | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB     |

Note: click the links in the above matrix to view the graphical image (plot).

**Equipment Configuration for Conducted High Band-Edge Emissions - Peak**

|                                |                        |                                   |                |
|--------------------------------|------------------------|-----------------------------------|----------------|
| <b>Variant:</b>                | 802.11n HT-20          | <b>Duty Cycle (%):</b>            | 98.0           |
| <b>Data Rate:</b>              | 6.50 MBit/s            | <b>Antenna Gain (dBi):</b>        | Not Applicable |
| <b>Modulation:</b>             | OFDM                   | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable         | <b>Tested By:</b>                 | GMH            |
| <b>Engineering Test Notes:</b> | MAC ADDR: 204C0380E4BE |                                   |                |

**Test Measurement Results**

| <b>Channel Frequency:</b>    | 2462.0 MHz                  |                  |                    |                 |                     |              |
|------------------------------|-----------------------------|------------------|--------------------|-----------------|---------------------|--------------|
| <b>Band-Edge Frequency:</b>  | 2483.5 MHz                  |                  |                    |                 |                     |              |
| <b>Test Frequency Range:</b> | 2452.0 - 2524.0 MHz         |                  |                    |                 |                     |              |
| Port(s)                      | Band-Edge Markers and Limit |                  |                    | Revised Limit   |                     | Margin (MHz) |
|                              | M3 Amplitude (dBm)          | Plot Limit (dBm) | M2 Frequency (MHz) | Amplitude (dBm) | M2A Frequency (MHz) |              |
| a                            | <a href="#">-42.57</a>      | -28.89           | 2472.20            |                 |                     | -11.300      |
| b                            | <a href="#">-41.55</a>      | -28.40           | 2471.90            |                 |                     | -11.600      |

**Traceability to Industry Recognized Test Methodologies**

|                                 |   |
|---------------------------------|---|
| <b>Work Instruction:</b>        | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| <b>Measurement Uncertainty:</b> | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB     |

Note: click the links in the above matrix to view the graphical image (plot).



**Equipment Configuration for Conducted High Band-Edge Emissions - Peak**

|                                |                        |                                   |                |
|--------------------------------|------------------------|-----------------------------------|----------------|
| <b>Variant:</b>                | 802.11n HT-40          | <b>Duty Cycle (%):</b>            | 98.0           |
| <b>Data Rate:</b>              | 13.50 MBit/s           | <b>Antenna Gain (dBi):</b>        | Not Applicable |
| <b>Modulation:</b>             | OFDM                   | <b>Beam Forming Gain (Y)(dB):</b> | Not Applicable |
| <b>TPC:</b>                    | Not Applicable         | <b>Tested By:</b>                 | GMH            |
| <b>Engineering Test Notes:</b> | MAC ADDR: 204C0380E4BE |                                   |                |

**Test Measurement Results**

| <b>Channel Frequency:</b>    | 2452.0 MHz                  |                  |                    |                 |                     |              |
|------------------------------|-----------------------------|------------------|--------------------|-----------------|---------------------|--------------|
| <b>Band-Edge Frequency:</b>  | 2483.5 MHz                  |                  |                    |                 |                     |              |
| <b>Test Frequency Range:</b> | 2432.0 - 2582.0 MHz         |                  |                    |                 |                     |              |
| Port(s)                      | Band-Edge Markers and Limit |                  |                    | Revised Limit   |                     | Margin (MHz) |
|                              | M3 Amplitude (dBm)          | Plot Limit (dBm) | M2 Frequency (MHz) | Amplitude (dBm) | M2A Frequency (MHz) |              |
| a                            | <a href="#">-43.82</a>      | -32.34           | 2471.40            |                 |                     | -12.100      |
| b                            | <a href="#">-44.67</a>      | -32.35           | 2471.70            |                 |                     | -11.800      |

**Traceability to Industry Recognized Test Methodologies**

|                                 |   |
|---------------------------------|---|
| <b>Work Instruction:</b>        | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| <b>Measurement Uncertainty:</b> | <=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB     |

Note: click the links in the above matrix to view the graphical image (plot).

## 9.4.2. Radiated Emissions

### 9.4.2.1. TX Spurious & Restricted Band Emissions

| Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions (Restricted Bands)   |   |                            |             |
|---|---|----------------------------|-------------|
| <b>Standard:</b>  | FCC CFR 47 Part 15 Subpart C 15.247 (DTS) | <b>Ambient Temp. (°C):</b> | 20.0 - 24.5 |
| <b>Test Heading:</b>  | Radiated Spurious and Band-Edge Emissions | <b>Rel. Humidity (%):</b>  | 32 - 45     |
| <b>Standard Section(s):</b>   | 15.205, 15.209                            | <b>Pressure (mBars):</b>   | 999 - 1001  |
| <b>Reference Document(s):</b>   | See Normative References                  |                            |             |
| <p><b>Test Procedure for Radiated Spurious and Band-Edge Emissions (Restricted Bands)</b><br/>           Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.</p> <p>Test configuration and setup for Radiated Spurious and Band-Edge Measurement were per the Radiated Test Set-up specified in this document.</p> <p>Limits for <a href="#">Restricted Bands</a><br/>           Peak emission: 74 dBuV/m<br/>           Average emission: 54 dBuV/m</p> <p>Field Strength Calculation<br/>           The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.<br/> <math>FS = R + AF + CORR - FO</math></p> <p>where:<br/>           FS = Field Strength<br/>           R = Measured Spectrum analyzer Input Amplitude<br/>           AF = Antenna Factor<br/>           CORR = Correction Factor = CL – AG + NFL<br/>           CL = Cable Loss<br/>           AG = Amplifier Gain<br/>           FO = Distance Falloff Factor<br/>           NFL = Notch Filter Loss or Waveguide Loss</p> <p>Example:<br/>           Given receiver input reading of 51.5 dBmV; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength (FS) of the measured emission is:</p> $FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dBmV/m}$ <p>Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:<br/>           Level (dBmV/m) = 20 * Log (level (mV/m))</p> <p>40 dBmV/m = 100 mV/m<br/>           48 dBmV/m = 250 mV/m</p> <p><b>Restricted Bands of Operation (15.205)</b><br/>           (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:</p> |   |                            |             |
| Frequency Band  |   |                            |             |
| MHz   | MHz                                       | MHz                        | GHz         |
| 0.090-0.110   | 16.42-16.423                              | 399.9-410                  | 4.5-5.15    |

|                   |                     |               |             |
|-------------------|---------------------|---------------|-------------|
| 0.495-0.505       | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 108-121.94          | 1718.8-1722.2 | 13.25-13.4  |
| 6.31175-6.31225   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | Above 38.6  |
| 13.36-13.41       |                     |               |             |

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to §15.213.
- (4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of subparts D or F of this part.
- (7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).
- (9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

**Equipment Configuration for TX Spurious & Restricted Band Emissions**

|                                 |           |                        |             |
|---------------------------------|-----------|------------------------|-------------|
| <b>Antenna:</b>                 | Aruba AB1 | <b>Variant:</b>        | 802.11b     |
| <b>Antenna Gain (dBi):</b>      | 2.00      | <b>Modulation:</b>     | CCK         |
| <b>Beam Forming Gain (Y):</b>   | 5         | <b>Duty Cycle (%):</b> | 99          |
| <b>Channel Frequency (MHz):</b> | 2412.00   | <b>Data Rate:</b>      | 1.00 MBit/s |
| <b>Power Setting:</b>           | 18        | <b>Tested By:</b>      | SB          |

**Test Measurement Results**

| 1000.00 - 18000.00 MHz |               |          |               |         |              |                  |            |        |         |              |           |            |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num                    | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| #1                     | 3215.99       | 71.48    | -2.04         | -11.58  | 57.86        | Peak (NRB)       | Vertical   | 100    | 0       | --           | --        | Pass       |
| #2                     | 3618.56       | 63.05    | -2.16         | -11.77  | 49.12        | Max Peak         | Horizontal | 137    | 336     | 74.0         | -24.9     | Pass       |
| #3                     | 3618.56       | 54.98    | -2.16         | -11.77  | 41.05        | Max Avg          | Horizontal | 137    | 336     | 54.0         | -13.0     | Pass       |
| #4                     | 3618.56       | 70.35    | -2.16         | -11.77  | 56.42        | Max Peak         | Vertical   | 152    | 28      | 74.0         | -17.6     | Pass       |
| #5                     | 3618.56       | 57.50    | -2.16         | -11.77  | 43.57        | Max Avg          | Vertical   | 152    | 28      | 54.0         | -10.4     | Pass       |
| #6                     | 4823.88       | 61.90    | -2.52         | -12.43  | 46.95        | Max Peak         | Vertical   | 99     | 332     | 74.0         | -27.1     | Pass       |
| #7                     | 4823.88       | 54.74    | -2.52         | -12.43  | 39.79        | Max Avg          | Vertical   | 99     | 332     | 54.0         | -14.2     | Pass       |

**Equipment Configuration for TX Spurious & Restricted Band Emissions**

|                                 |           |                        |             |
|---------------------------------|-----------|------------------------|-------------|
| <b>Antenna:</b>                 | Aruba AB1 | <b>Variant:</b>        | 802.11b     |
| <b>Antenna Gain (dBi):</b>      | 2.00      | <b>Modulation:</b>     | CCK         |
| <b>Beam Forming Gain (Y):</b>   | 5         | <b>Duty Cycle (%):</b> | 99          |
| <b>Channel Frequency (MHz):</b> | 2437.00   | <b>Data Rate:</b>      | 1.00 MBit/s |
| <b>Power Setting:</b>           | 18        | <b>Tested By:</b>      | SB          |

**Test Measurement Results**

| 1000.00 - 18000.00 MHz |               |          |               |         |              |                  |            |        |         |              |           |            |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num                    | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| #1                     | 2437.98       | 60.50    | -1.78         | -12.10  | 46.62        | Fundamental      | Horizontal | 151    | 0       | --           | --        |            |
| #2                     | 3249.32       | 59.08    | -2.06         | -11.61  | 45.41        | Peak (NRB)       | Horizontal | 151    | 0       | --           | --        | Pass       |
| #3                     | 3249.36       | 72.46    | -2.06         | -11.61  | 58.79        | Peak (NRB)       | Vertical   | 151    | 0       | --           | --        | Pass       |
| #4                     | 3655.28       | 66.40    | -2.16         | -11.86  | 52.38        | Max Peak         | Horizontal | 119    | 26      | 74.0         | -21.6     | Pass       |
| #5                     | 3655.28       | 59.27    | -2.16         | -11.86  | 45.25        | Max Avg          | Horizontal | 119    | 26      | 54.0         | -8.8      | Pass       |
| #6                     | 3656.17       | 71.69    | -2.15         | -11.86  | 57.68        | Max Peak         | Vertical   | 153    | 7       | 74.0         | -16.3     | Pass       |
| #7                     | 3656.17       | 58.01    | -2.15         | -11.86  | 44.00        | Max Avg          | Vertical   | 153    | 7       | 54.0         | -10.0     | Pass       |
| #8                     | 4873.92       | 64.37    | -2.51         | -12.61  | 49.25        | Max Peak         | Vertical   | 180    | 14      | 74.0         | -24.8     | Pass       |
| #9                     | 4873.92       | 58.72    | -2.51         | -12.61  | 43.60        | Max Avg          | Vertical   | 180    | 14      | 54.0         | -10.4     | Pass       |
| #10                    | 7379.06       | 56.48    | -3.03         | -8.00   | 45.45        | Max Peak         | Horizontal | 98     | 230     | 74.0         | -28.6     | Pass       |
| #11                    | 7379.06       | 43.31    | -3.03         | -8.00   | 32.28        | Max Avg          | Horizontal | 98     | 230     | 54.0         | -21.7     | Pass       |

**Equipment Configuration for TX Spurious & Restricted Band Emissions**

|                                 |           |                        |             |
|---------------------------------|-----------|------------------------|-------------|
| <b>Antenna:</b>                 | Aruba AB1 | <b>Variant:</b>        | 802.11b     |
| <b>Antenna Gain (dBi):</b>      | 2.00      | <b>Modulation:</b>     | CCK         |
| <b>Beam Forming Gain (Y):</b>   | 5         | <b>Duty Cycle (%):</b> | 99          |
| <b>Channel Frequency (MHz):</b> | 2462.00   | <b>Data Rate:</b>      | 1.00 MBit/s |
| <b>Power Setting:</b>           | 18        | <b>Tested By:</b>      | SB          |

**Test Measurement Results**

| 1000.00 - 18000.00 MHz |               |          |               |         |              |                  |            |        |         |              |           |            |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num                    | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| #1                     | 1641.70       | 59.97    | -1.46         | -16.01  | 42.50        | Max Peak         | Vertical   | 186    | 23      | 74.0         | -31.5     | Pass       |
| #2                     | 1641.70       | 54.46    | -1.46         | -16.01  | 36.99        | Max Avg          | Vertical   | 186    | 23      | 54.0         | -17.0     | Pass       |
| #3                     | 2463.11       | 59.57    | -1.79         | -11.96  | 45.82        | Peak (NRB)       | Horizontal | 100    | 0       | --           | --        | Pass       |
| #4                     | 3282.37       | 71.54    | -2.04         | -11.69  | 57.81        | Peak (NRB)       | Vertical   | 150    | 0       | --           | --        | Pass       |
| #5                     | 3424.80       | 60.04    | -2.10         | -12.14  | 45.80        | Max Peak         | Horizontal | 186    | 334     | 74.0         | -28.2     | Pass       |
| #6                     | 3424.80       | 49.87    | -2.10         | -12.14  | 35.63        | Max Avg          | Horizontal | 186    | 334     | 54.0         | -18.4     | Pass       |
| #7                     | 3692.53       | 63.79    | -2.17         | -11.68  | 49.94        | Max Peak         | Horizontal | 197    | 282     | 74.0         | -24.1     | Pass       |
| #8                     | 3692.53       | 54.00    | -2.17         | -11.68  | 40.15        | Max Avg          | Horizontal | 197    | 282     | 54.0         | -13.9     | Pass       |
| #9                     | 3692.73       | 71.26    | -2.17         | -11.68  | 57.41        | Peak (Scan)      | Vertical   | 100    | 0       | 74.0         | -16.6     | Pass       |
| #10                    | 3692.87       | 70.30    | -2.17         | -11.68  | 56.45        | Peak (Scan)      | Horizontal | 100    | 0       | 74.0         | -17.6     | Pass       |
| #11                    | 3693.20       | 71.87    | -2.17         | -11.67  | 58.03        | Max Peak         | Vertical   | 167    | 31      | 74.0         | -16.0     | Pass       |
| #12                    | 3693.20       | 63.08    | -2.17         | -11.67  | 49.24        | Max Avg          | Vertical   | 167    | 31      | 54.0         | -4.8      | Pass       |
| #13                    | 4924.10       | 61.91    | -2.56         | -12.35  | 47.00        | Peak (Scan)      | Vertical   | 150    | 0       | 74.0         | -27.0     | Pass       |
| #14                    | 4924.10       | 61.91    | -2.56         | -12.35  | 47.00        | Peak (Scan)      | Horizontal | 150    | 0       | 74.0         | -27.0     | Pass       |

### 9.4.2.2. Restricted Edge & Band-Edge Emissions

#### Lower Restricted Band-Edge

| Aruba AB1        |                           | Band-Edge Freq | Limit 74.0dB $\mu$ V/m | Limit 54.0dB $\mu$ V/m | Power Setting |
|------------------|---------------------------|----------------|------------------------|------------------------|---------------|
| Operational Mode | Operating Frequency (MHz) | MHz            | dB $\mu$ V/m           | dB $\mu$ V/m           |               |
| 802.11b          | 2412.00                   | 2390.00        | 63.36                  | 53.03                  | 18            |
| 802.11g          | 2412.00                   | 2390.00        | 70.10                  | 52.15                  | 16            |
| 802.11n HT-20    | 2412.00                   | 2390.00        | 71.26                  | 51.72                  | 15            |
| 802.11n HT-40    | 2422.00                   | 2390.00        | 71.87                  | 53.23                  | 13            |

#### Upper Restricted Band-Edge

| Aruba AB1        |                           | Band-Edge Freq | Limit 74.0dB $\mu$ V/m | Limit 54.0dB $\mu$ V/m | Power Setting |
|------------------|---------------------------|----------------|------------------------|------------------------|---------------|
| Operational Mode | Operating Frequency (MHz) | MHz            | dB $\mu$ V/m           | dB $\mu$ V/m           |               |
| 802.11b          | 2462.00                   | 2483.50        | 61.82                  | 50.63                  | 18            |
| 802.11g          | 2462.00                   | 2483.50        | 71.51                  | 53.44                  | 16            |
| 802.11n HT-20    | 2462.00                   | 2483.50        | 70.66                  | 53.60                  | 14            |
| 802.11n HT-40    | 2452.00                   | 2483.50        | 69.01                  | 53.44                  | 12            |

**Equipment Configuration for Radiated - Lower Restricted Band-Edge Emissions**

|                                 |           |                        |             |
|---------------------------------|-----------|------------------------|-------------|
| <b>Antenna:</b>                 | Aruba AB1 | <b>Variant:</b>        | 802.11b     |
| <b>Antenna Gain (dBi):</b>      | 2.00      | <b>Modulation:</b>     | CCK         |
| <b>Beam Forming Gain (Y):</b>   | 5         | <b>Duty Cycle (%):</b> | 99          |
| <b>Channel Frequency (MHz):</b> | 2412.00   | <b>Data Rate:</b>      | 1.00 MBit/s |
| <b>Power Setting:</b>           | 18        | <b>Tested By:</b>      | SB          |

**Test Measurement Results**

**2310.00 - 2422.00 MHz**

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1  | 2385.51       | 22.86    | -1.77         | 31.94   | 53.03        | Max Avg          | Horizontal | 156    | 11      | 54.0         | -1.0      | Pass       |
| #2  | 2386.18       | 33.19    | -1.77         | 31.94   | 63.36        | Max Peak         | Horizontal | 156    | 11      | 74.0         | -10.6     | Pass       |
| #3  | 2390.00       | --       | --            | --      | --           | Restricted-Band  | --         | --     | --      | --           | --        | --         |

**Equipment Configuration for Radiated - Upper Restricted Band-Edge Emissions**

|                                 |           |                        |             |
|---------------------------------|-----------|------------------------|-------------|
| <b>Antenna:</b>                 | Aruba AB1 | <b>Variant:</b>        | 802.11b     |
| <b>Antenna Gain (dBi):</b>      | 2.00      | <b>Modulation:</b>     | CCK         |
| <b>Beam Forming Gain (Y):</b>   | 5         | <b>Duty Cycle (%):</b> | 99          |
| <b>Channel Frequency (MHz):</b> | 2462.00   | <b>Data Rate:</b>      | 1.00 MBit/s |
| <b>Power Setting:</b>           | 18        | <b>Tested By:</b>      | SB          |

**Test Measurement Results**

**2452.00 - 2520.00 MHz**

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #2  | 2487.72       | 31.27    | -1.78         | 32.33   | 61.82        | Max Peak         | Horizontal | 156    | 11      | 74.0         | -12.2     | Pass       |
| #3  | 2488.00       | 20.08    | -1.78         | 32.33   | 50.63        | Max Avg          | Horizontal | 156    | 11      | 54.0         | -3.4      | Pass       |
| #1  | 2483.50       | --       | --            | --      | --           | Restricted-Band  | --         | --     | --      | --           | --        | --         |



**Equipment Configuration for Radiated - Lower Restricted Band-Edge Emissions**

|                                 |                |                        |             |
|---------------------------------|----------------|------------------------|-------------|
| <b>Antenna:</b>                 | Aruba AB1      | <b>Variant:</b>        | 802.11g     |
| <b>Antenna Gain (dBi):</b>      | Not Applicable | <b>Modulation:</b>     | OFDM        |
| <b>Beam Forming Gain (Y):</b>   | Not Applicable | <b>Duty Cycle (%):</b> | 99          |
| <b>Channel Frequency (MHz):</b> | 2412.00        | <b>Data Rate:</b>      | 6.00 MBit/s |
| <b>Power Setting:</b>           | 16             | <b>Tested By:</b>      | SB          |

**Test Measurement Results**

**2310.00 - 2422.00 MHz**

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1  | 2388.88       | 39.92    | -1.77         | 31.95   | 70.10        | Max Peak         | Horizontal | 156    | 11      | 74.0         | -3.9      | Pass       |
| #2  | 2389.10       | 21.97    | -1.77         | 31.95   | 52.15        | Max Avg          | Horizontal | 156    | 11      | 54.0         | -1.9      | Pass       |
| #3  | 2390.00       | --       | --            | --      | --           | Restricted-Band  | --         | --     | --      | --           | --        | --         |

**Equipment Configuration for Radiated - Upper Restricted Band-Edge Emissions**

|                                 |           |                        |             |
|---------------------------------|-----------|------------------------|-------------|
| <b>Antenna:</b>                 | Aruba AB1 | <b>Variant:</b>        | 802.11g     |
| <b>Antenna Gain (dBi):</b>      | 2.00      | <b>Modulation:</b>     | OFDM        |
| <b>Beam Forming Gain (Y):</b>   | 5         | <b>Duty Cycle (%):</b> | 99          |
| <b>Channel Frequency (MHz):</b> | 2462.00   | <b>Data Rate:</b>      | 6.00 MBit/s |
| <b>Power Setting:</b>           | 16        | <b>Tested By:</b>      | SB          |

**Test Measurement Results**

**2452.00 - 2520.00 MHz**

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1  | 2483.50       | 22.89    | -1.78         | 32.33   | 53.44        | Max Avg          | Horizontal | 156    | 11      | 54.0         | -0.6      | Pass       |
| #3  | 2487.32       | 40.96    | -1.78         | 32.33   | 71.51        | Max Peak         | Horizontal | 156    | 11      | 74.0         | -2.5      | Pass       |
| #2  | 2483.50       | --       | --            | --      | --           | Restricted-Band  | --         | --     | --      | --           | --        | --         |



**Equipment Configuration for Radiated - Lower Restricted Band-Edge Emissions**

|                                 |           |                        |               |
|---------------------------------|-----------|------------------------|---------------|
| <b>Antenna:</b>                 | Aruba AB1 | <b>Variant:</b>        | 802.11n HT-20 |
| <b>Antenna Gain (dBi):</b>      | 2.00      | <b>Modulation:</b>     | OFDM          |
| <b>Beam Forming Gain (Y):</b>   | 5         | <b>Duty Cycle (%):</b> | 99            |
| <b>Channel Frequency (MHz):</b> | 2412.00   | <b>Data Rate:</b>      | 6.50 MBit/s   |
| <b>Power Setting:</b>           | 15        | <b>Tested By:</b>      | SB            |

**Test Measurement Results**

**2310.00 - 2422.00 MHz**

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1  | 2388.20       | 41.08    | -1.77         | 31.95   | 71.26        | Max Peak         | Horizontal | 156    | 11      | 74.0         | -2.7      | Pass       |
| #2  | 2389.55       | 21.53    | -1.77         | 31.96   | 51.72        | Max Avg          | Horizontal | 156    | 11      | 54.0         | -2.3      | Pass       |
| #3  | 2390.00       | --       | --            | --      | --           | Restricted-Band  | --         | --     | --      | --           | --        | --         |

**Equipment Configuration for Radiated - Upper Restricted Band-Edge Emissions**

|                                 |                |                        |               |
|---------------------------------|----------------|------------------------|---------------|
| <b>Antenna:</b>                 | Aruba AB1      | <b>Variant:</b>        | 802.11n HT-20 |
| <b>Antenna Gain (dBi):</b>      | Not Applicable | <b>Modulation:</b>     | OFDM          |
| <b>Beam Forming Gain (Y):</b>   | Not Applicable | <b>Duty Cycle (%):</b> | 99            |
| <b>Channel Frequency (MHz):</b> | 2462.00        | <b>Data Rate:</b>      | 6.50 MBit/s   |
| <b>Power Setting:</b>           | 14             | <b>Tested By:</b>      | SB            |

**Test Measurement Results**

**2452.00 - 2520.00 MHz**

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1  | 2483.50       | 23.05    | -1.78         | 32.33   | 53.60        | Max Avg          | Horizontal | 156    | 11      | 54.0         | -0.4      | Pass       |
| #3  | 2484.18       | 40.11    | -1.78         | 32.33   | 70.66        | Max Peak         | Horizontal | 156    | 11      | 74.0         | -3.3      | Pass       |
| #2  | 2483.50       | --       | --            | --      | --           | Restricted-Band  | --         | --     | --      | --           | --        | --         |

**Equipment Configuration for Radiated - Lower Restricted Band-Edge Emissions**

|                                 |           |                        |               |
|---------------------------------|-----------|------------------------|---------------|
| <b>Antenna:</b>                 | Aruba AB1 | <b>Variant:</b>        | 802.11n HT-40 |
| <b>Antenna Gain (dBi):</b>      | 2.00      | <b>Modulation:</b>     | OFDM          |
| <b>Beam Forming Gain (Y):</b>   | 5         | <b>Duty Cycle (%):</b> | 99            |
| <b>Channel Frequency (MHz):</b> | 2422.00   | <b>Data Rate:</b>      | 13.50 MBit/s  |
| <b>Power Setting:</b>           | 13        | <b>Tested By:</b>      | SB            |

**Test Measurement Results**

**2310.00 - 2422.00 MHz**

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #1  | 2387.76       | 41.69    | -1.77         | 31.95   | 71.87        | Max Peak         | Horizontal | 156    | 11      | 74.0         | -2.1      | Pass       |
| #2  | 2388.20       | 23.05    | -1.77         | 31.95   | 53.23        | Max Avg          | Horizontal | 156    | 11      | 54.0         | -0.8      | Pass       |
| #3  | 2390.00       | --       | --            | --      | --           | Restricted-Band  | --         | --     | --      | --           | --        | --         |

**Equipment Configuration for Radiated - Upper Restricted Band-Edge Emissions**

|                                 |                |                        |               |
|---------------------------------|----------------|------------------------|---------------|
| <b>Antenna:</b>                 | Aruba AB1      | <b>Variant:</b>        | 802.11n HT-40 |
| <b>Antenna Gain (dBi):</b>      | Not Applicable | <b>Modulation:</b>     | OFDM          |
| <b>Beam Forming Gain (Y):</b>   | Not Applicable | <b>Duty Cycle (%):</b> | 99            |
| <b>Channel Frequency (MHz):</b> | 2452.00        | <b>Data Rate:</b>      | 13.50 MBit/s  |
| <b>Power Setting:</b>           | 12             | <b>Tested By:</b>      | SB            |


**Test Measurement Results**

**2452.00 - 2520.00 MHz**

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| #2  | 2484.32       | 38.46    | -1.78         | 32.33   | 69.01        | Max Peak         | Horizontal | 156    | 11      | 74.0         | -5.0      | Pass       |
| #3  | 2484.59       | 22.89    | -1.78         | 32.33   | 53.44        | Max Avg          | Horizontal | 156    | 11      | 54.0         | -0.6      | Pass       |
| #1  | 2483.50       | --       | --            | --      | --           | Restricted-Band  | --         | --     | --      | --           | --        | --         |

## **A. APPENDIX - GRAPHICAL IMAGES**

### A.1. 6 dB & 99% Bandwidth

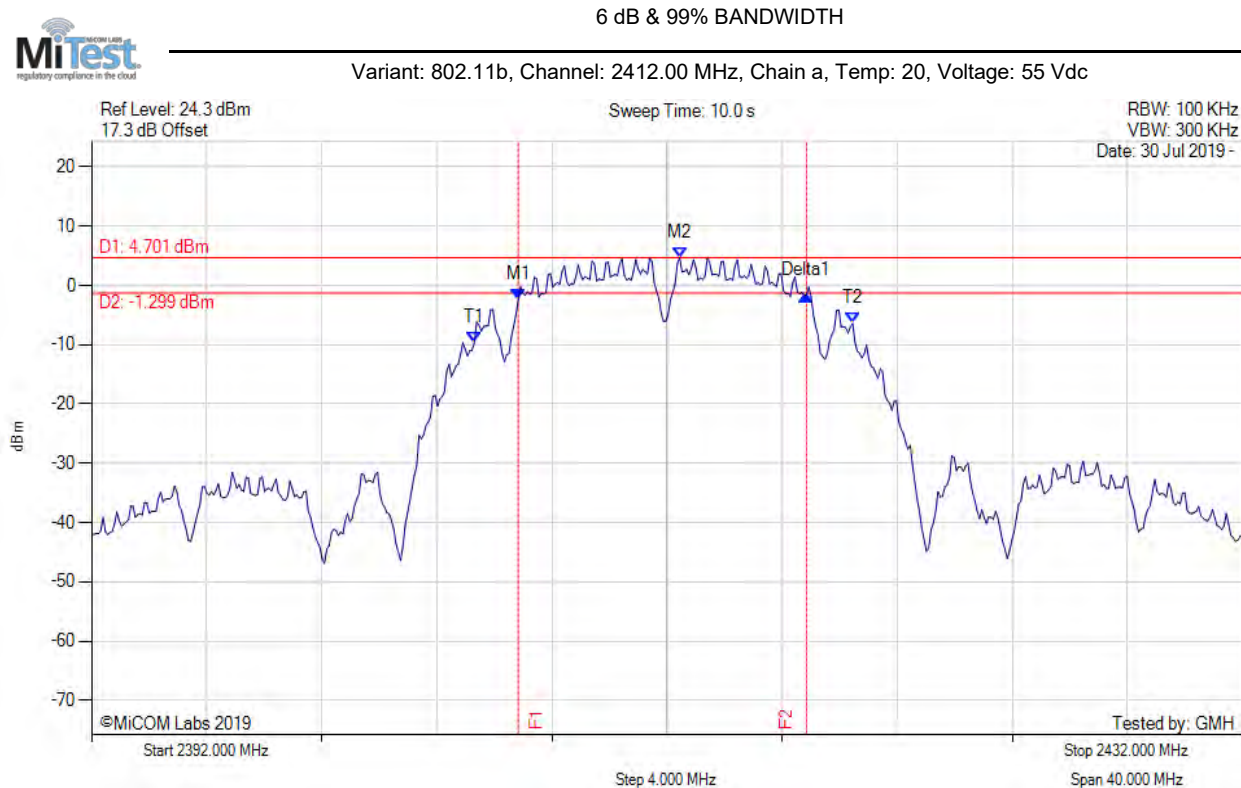


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results  |
|---|---|---|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2406.830 MHz : -2.425 dBm<br>M2 : 2412.441 MHz : 4.701 dBm<br>Delta1 : 10.020 MHz : 0.746 dB<br>T1 : 2405.307 MHz : -9.639 dBm<br>T2 : 2418.453 MHz : -6.432 dBm<br>OBW : 13.146 MHz | Measured 6 dB Bandwidth: 10.020 MHz<br>Limit: ≥500.0 kHz<br>Margin: -9.52 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11b, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

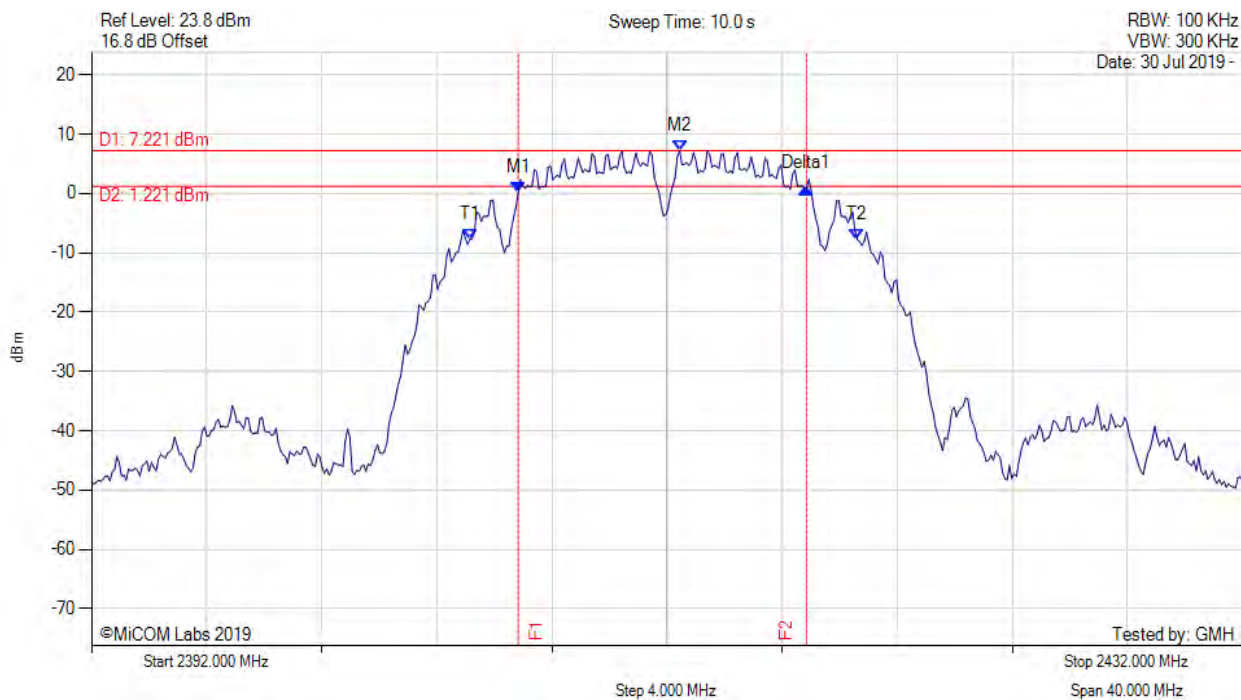


| Analyzer Setup  | Marker:Frequency:Amplitude   | Test Results  |
|---|--|---|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2406.830 MHz : 0.139 dBm<br>M2 : 2412.441 MHz : 7.221 dBm<br>Delta1 : 10.020 MHz : 0.797 dB<br>T1 : 2405.146 MHz : -7.772 dBm<br>T2 : 2418.613 MHz : -7.762 dBm<br>OBW : 13.467 MHz | Measured 6 dB Bandwidth: 10.020 MHz<br>Limit: ≥500.0 kHz<br>Margin: -9.52 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11b, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

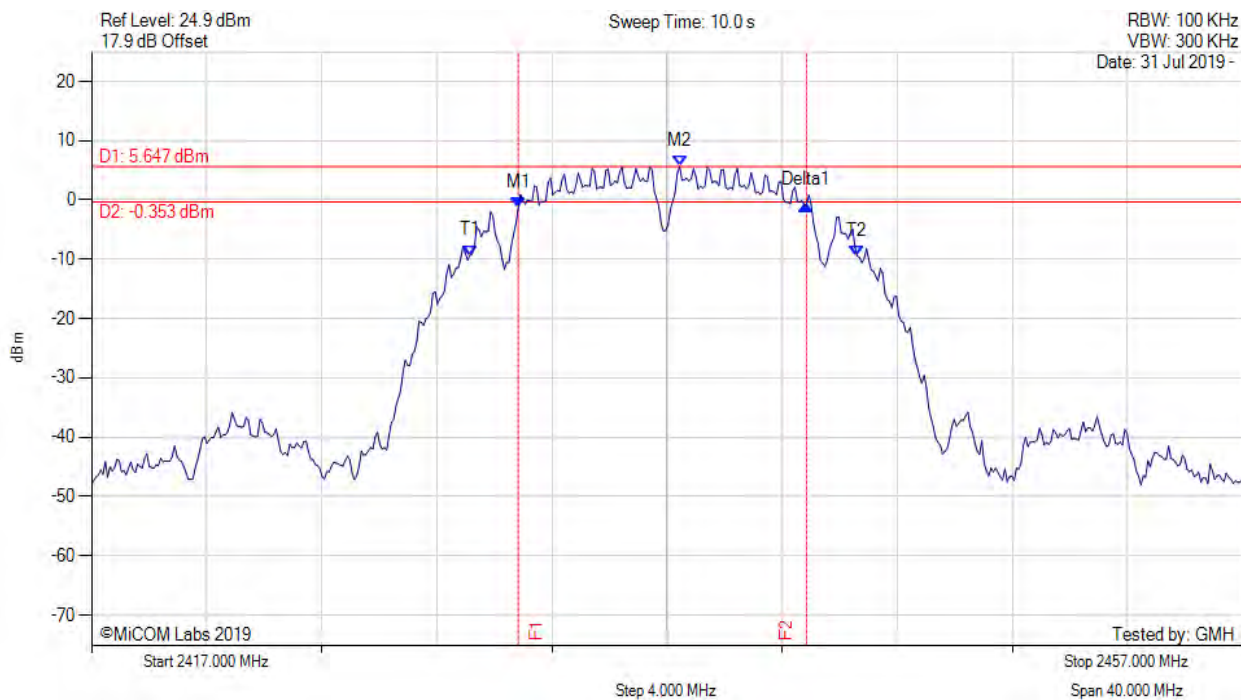


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results  |
|---|---|---|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2431.830 MHz : -1.366 dBm<br>M2 : 2437.441 MHz : 5.647 dBm<br>Delta1 : 10.020 MHz : 0.616 dB<br>T1 : 2430.146 MHz : -9.367 dBm<br>T2 : 2443.613 MHz : -9.397 dBm<br>OBW : 13.467 MHz | Measured 6 dB Bandwidth: 10.020 MHz<br>Limit: ≥500.0 kHz<br>Margin: -9.52 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11b, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

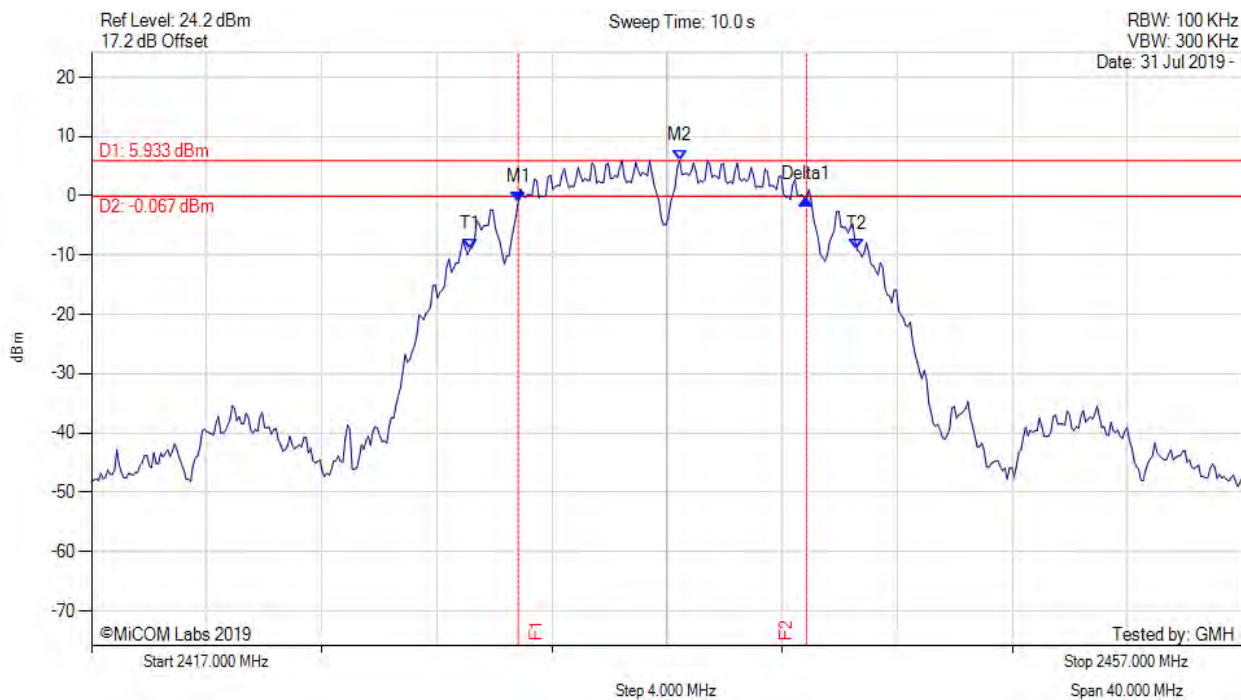

| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results  |
|---|---|---|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2431.830 MHz : -0.980 dBm<br>M2 : 2437.441 MHz : 5.933 dBm<br>Delta1 : 10.020 MHz : 0.431 dB<br>T1 : 2430.146 MHz : -9.054 dBm<br>T2 : 2443.613 MHz : -9.090 dBm<br>OBW : 13.467 MHz | Measured 6 dB Bandwidth: 10.020 MHz<br>Limit: ≥500.0 kHz<br>Margin: -9.52 MHz |


[back to matrix](#)



6 dB & 99% BANDWIDTH



Variant: 802.11b, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

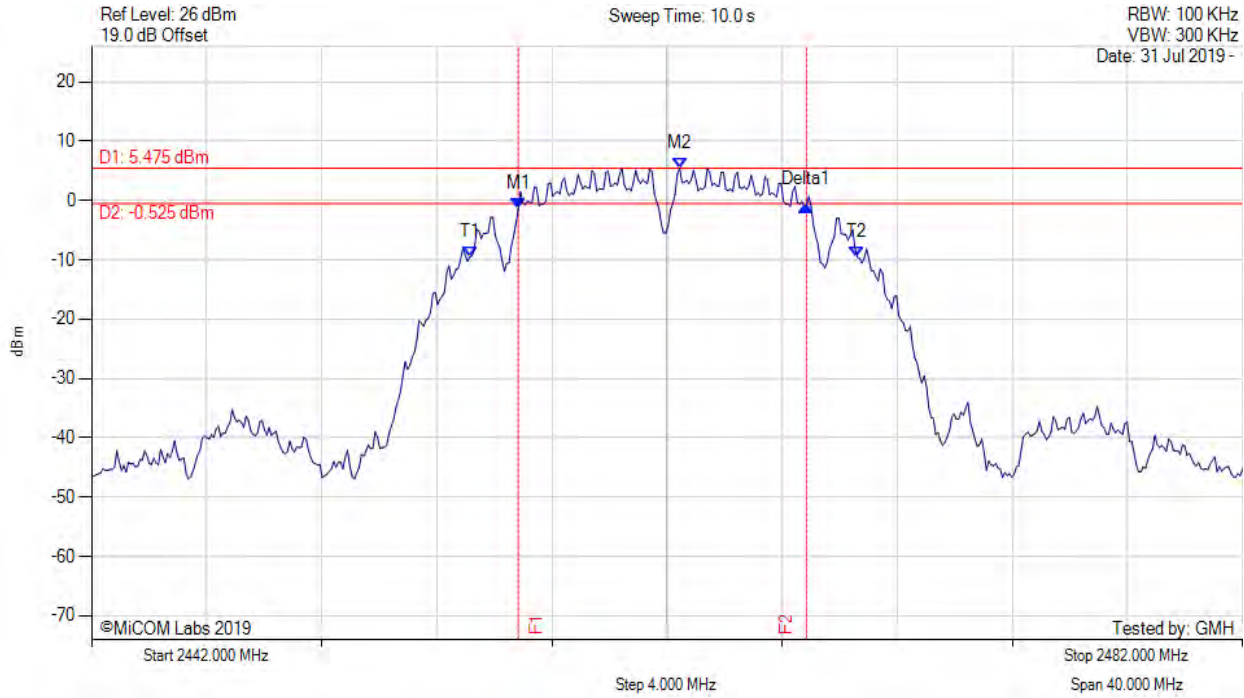


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results  |
|---|---|---|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2456.830 MHz : -1.435 dBm<br>M2 : 2462.441 MHz : 5.475 dBm<br>Delta1 : 10.020 MHz : 0.645 dB<br>T1 : 2455.146 MHz : -9.499 dBm<br>T2 : 2468.613 MHz : -9.556 dBm<br>OBW : 13.467 MHz | Measured 6 dB Bandwidth: 10.020 MHz<br>Limit: ≥500.0 kHz<br>Margin: -9.52 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11b, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

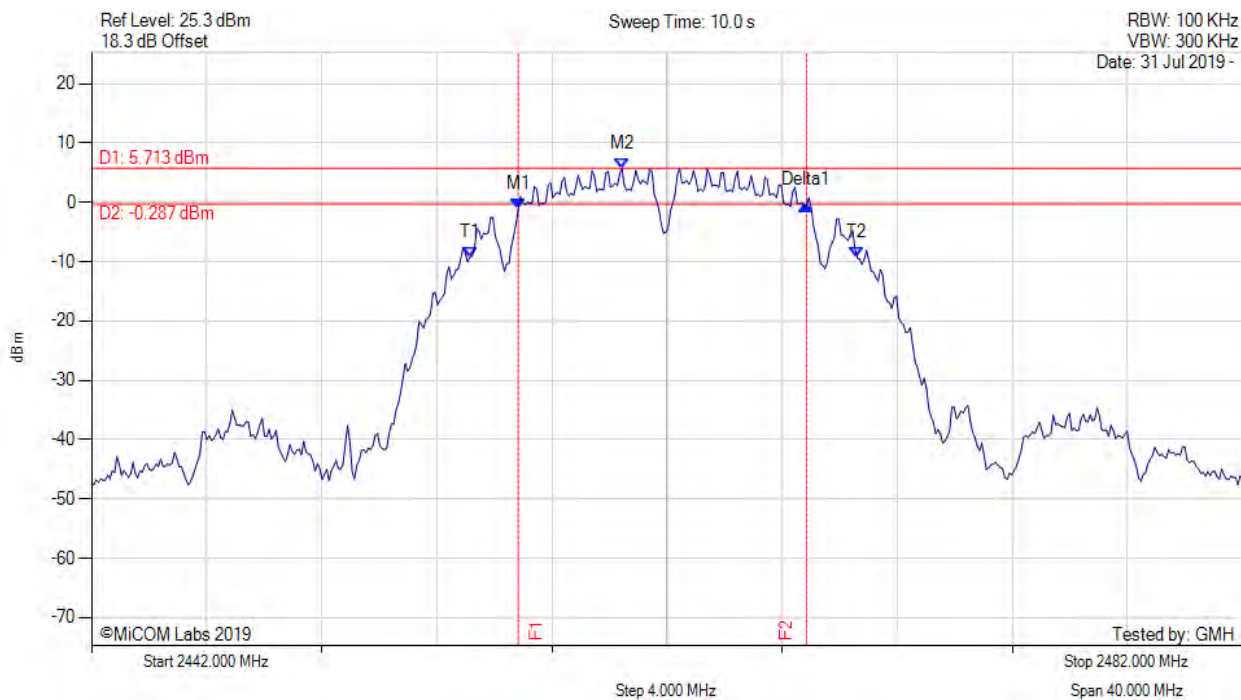


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results  |
|---|---|---|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2456.830 MHz : -1.145 dBm<br>M2 : 2460.437 MHz : 5.713 dBm<br>Delta1 : 10.020 MHz : 0.614 dB<br>T1 : 2455.146 MHz : -9.255 dBm<br>T2 : 2468.613 MHz : -9.357 dBm<br>OBW : 13.467 MHz | Measured 6 dB Bandwidth: 10.020 MHz<br>Limit: ≥500.0 kHz<br>Margin: -9.52 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11g, Channel: 2412.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

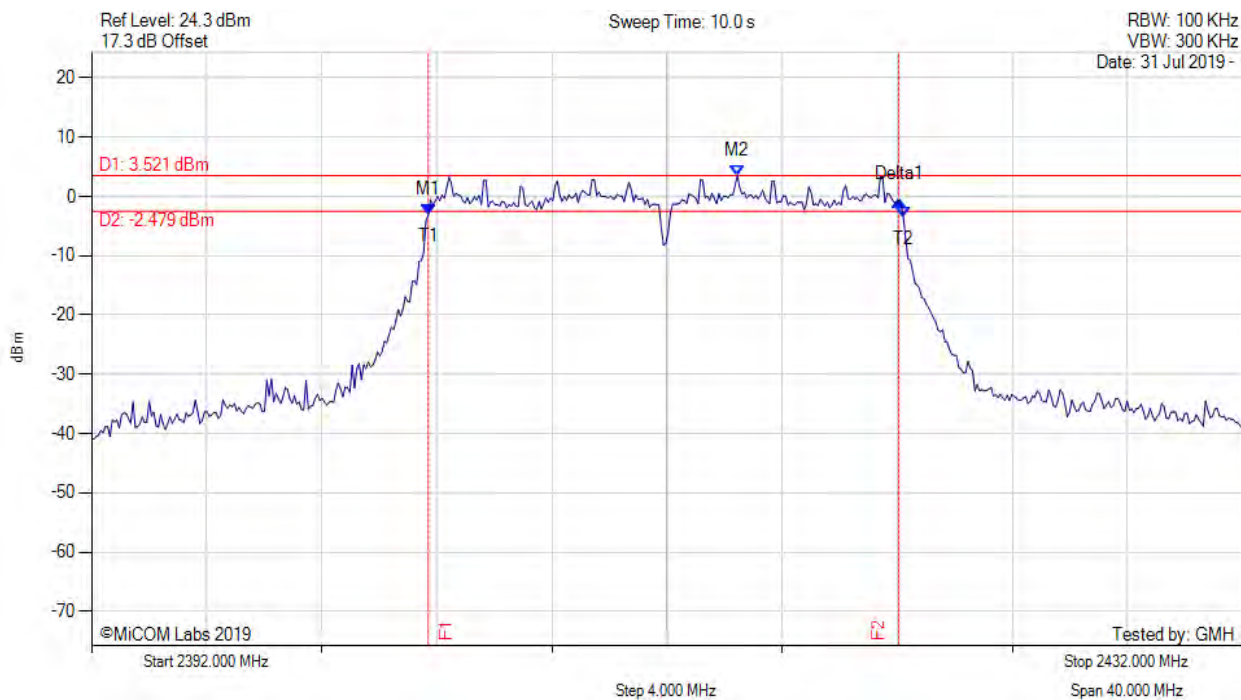


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results   |
|---|---|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2403.703 MHz : -3.093 dBm<br>M2 : 2414.445 MHz : 3.521 dBm<br>Delta1 : 16.353 MHz : 2.461 dB<br>T1 : 2403.703 MHz : -3.093 dBm<br>T2 : 2420.216 MHz : -3.611 dBm<br>OBW : 16.513 MHz | Measured 6 dB Bandwidth: 16.353 MHz<br>Limit: $\geq 500.0$ kHz<br>Margin: -15.85 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11g, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

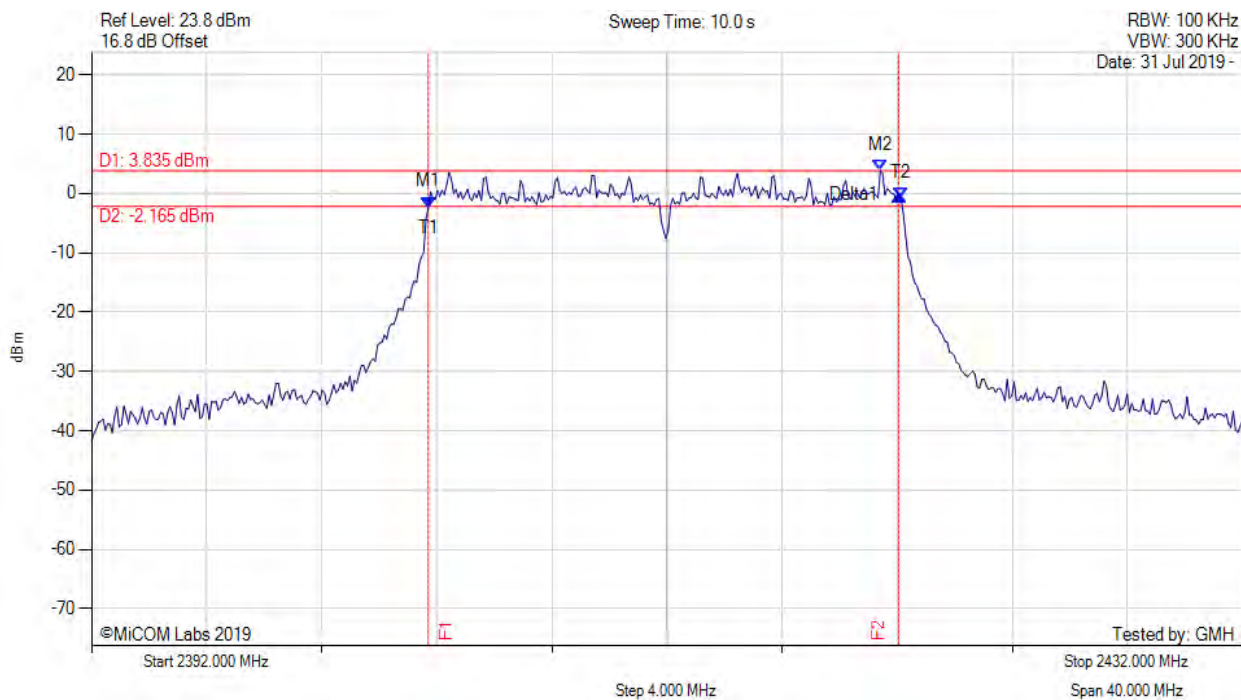


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results   |
|---|---|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2403.703 MHz : -2.285 dBm<br>M2 : 2419.415 MHz : 3.835 dBm<br>Delta1 : 16.353 MHz : 2.109 dB<br>T1 : 2403.703 MHz : -2.285 dBm<br>T2 : 2420.136 MHz : -0.705 dBm<br>OBW : 16.433 MHz | Measured 6 dB Bandwidth: 16.353 MHz<br>Limit: ≥500.0 kHz<br>Margin: -15.85 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11g, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

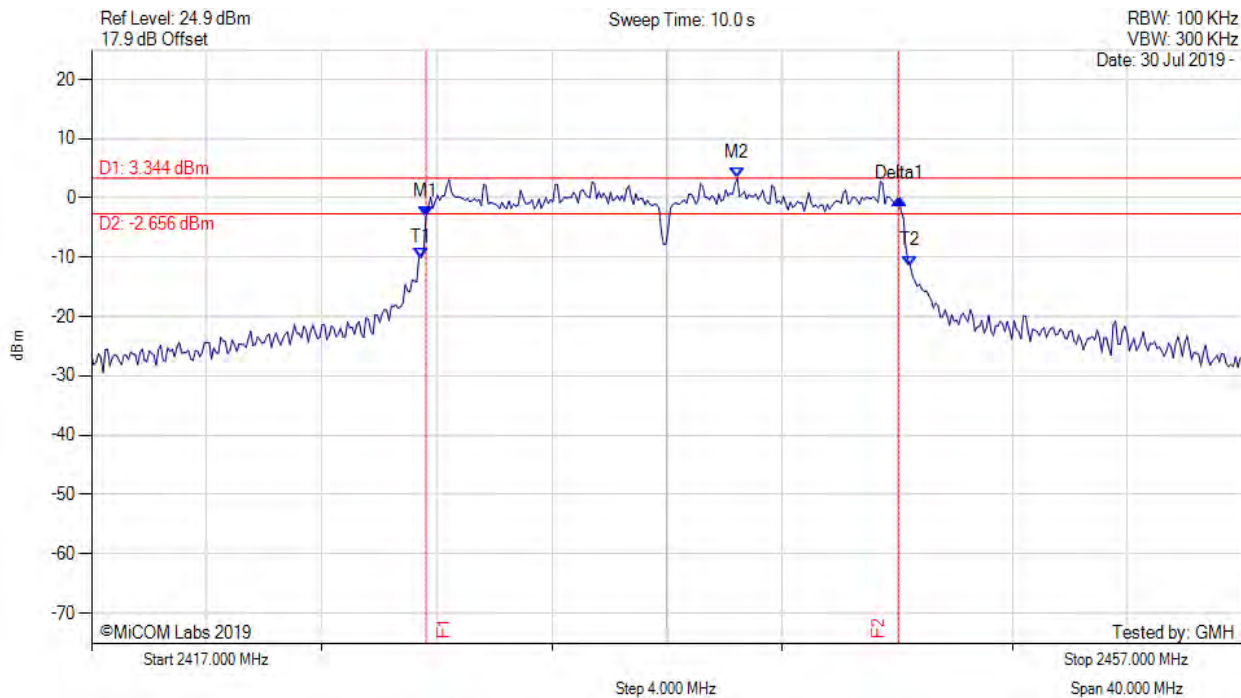


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results   |
|---|---|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2428.623 MHz : -3.103 dBm<br>M2 : 2439.445 MHz : 3.344 dBm<br>Delta1 : 16.433 MHz : 2.969 dB<br>T1 : 2428.463 MHz : -10.080 dBm<br>T2 : 2445.457 MHz : -11.476 dBm<br>OBW : 16.994 MHz | Measured 6 dB Bandwidth: 16.433 MHz<br>Limit: $\geq 500.0$ kHz<br>Margin: -15.93 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11g, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

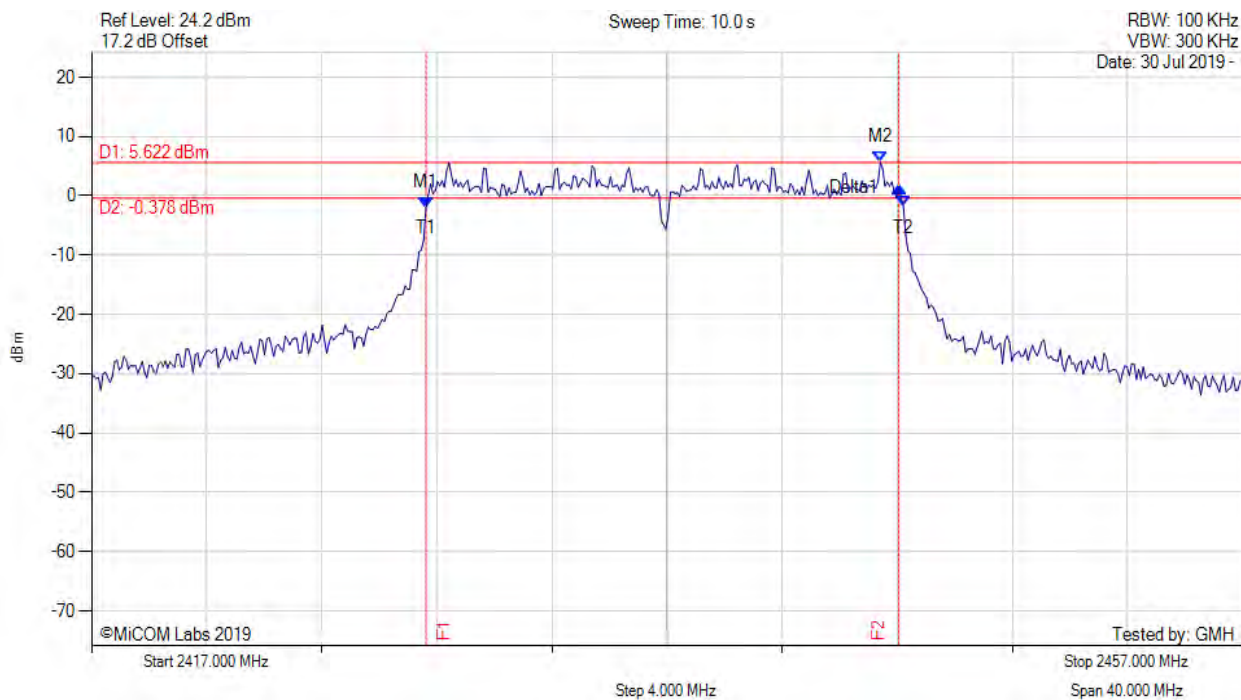


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results   |
|---|---|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2428.623 MHz : -1.948 dBm<br>M2 : 2444.415 MHz : 5.622 dBm<br>Delta1 : 16.433 MHz : 3.419 dB<br>T1 : 2428.623 MHz : -1.948 dBm<br>T2 : 2445.216 MHz : -1.832 dBm<br>OBW : 16.593 MHz | Measured 6 dB Bandwidth: 16.433 MHz<br>Limit: ≥500.0 kHz<br>Margin: -15.93 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11g, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

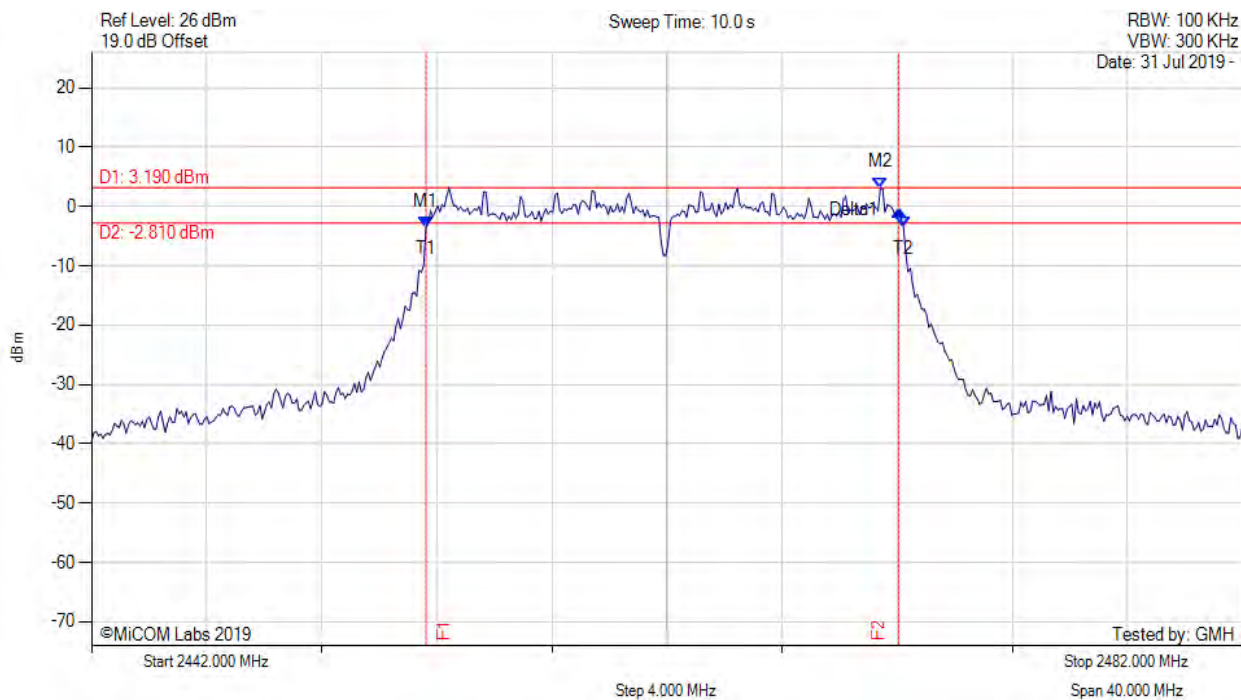


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results   |
|---|---|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2453.623 MHz : -3.522 dBm<br>M2 : 2469.415 MHz : 3.190 dBm<br>Delta1 : 16.433 MHz : 2.959 dB<br>T1 : 2453.623 MHz : -3.522 dBm<br>T2 : 2470.216 MHz : -3.499 dBm<br>OBW : 16.593 MHz | Measured 6 dB Bandwidth: 16.433 MHz<br>Limit: ≥500.0 kHz<br>Margin: -15.93 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11g, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

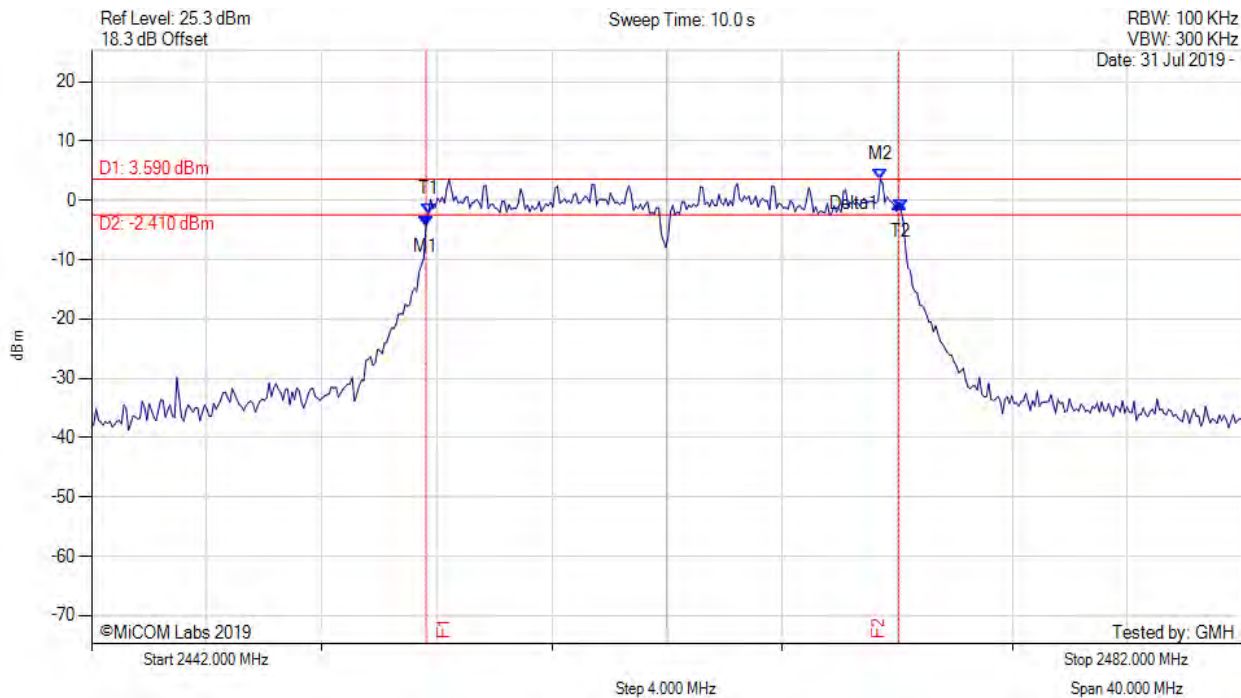

| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results   |
|---|---|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2453.623 MHz : -4.309 dBm<br>M2 : 2469.415 MHz : 3.590 dBm<br>Delta1 : 16.433 MHz : 3.870 dB<br>T1 : 2453.703 MHz : -2.322 dBm<br>T2 : 2470.136 MHz : -1.588 dBm<br>OBW : 16.433 MHz | Measured 6 dB Bandwidth: 16.433 MHz<br>Limit: $\geq 500.0$ kHz<br>Margin: -15.93 MHz |


[back to matrix](#)



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

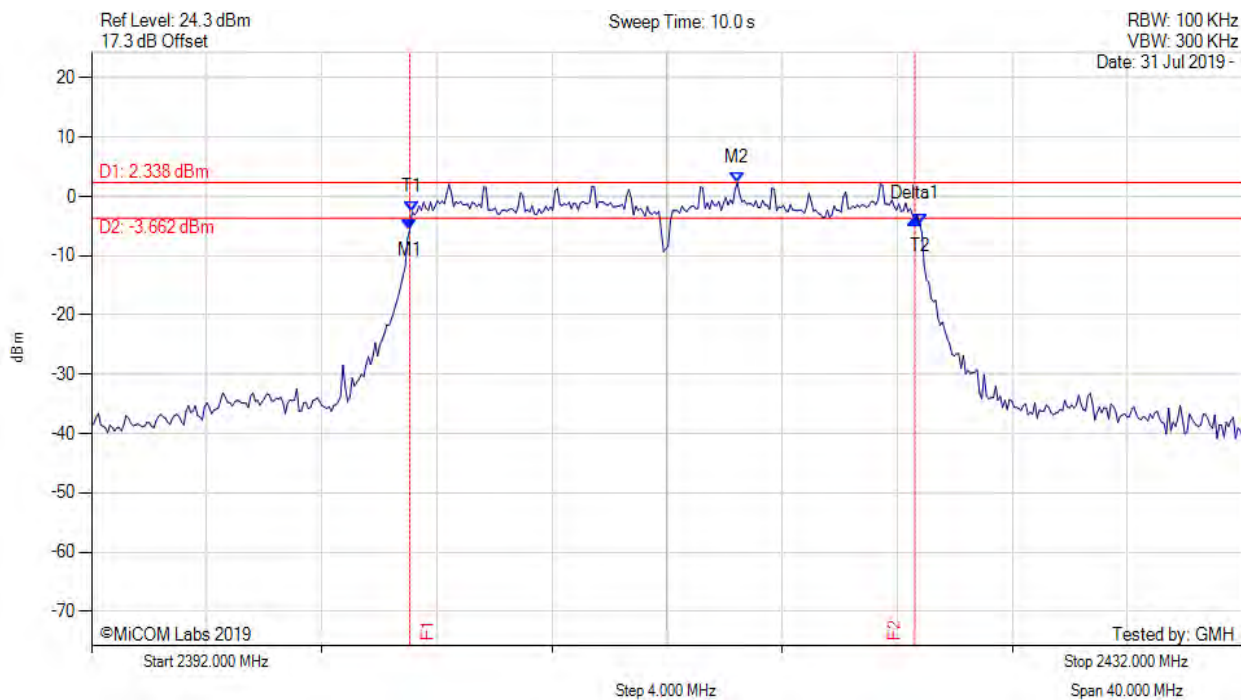


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results   |
|---|---|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2403.062 MHz : -5.549 dBm<br>M2 : 2414.445 MHz : 2.338 dBm<br>Delta1 : 17.555 MHz : 1.686 dB<br>T1 : 2403.142 MHz : -2.562 dBm<br>T2 : 2420.778 MHz : -4.697 dBm<br>OBW : 17.635 MHz | Measured 6 dB Bandwidth: 17.555 MHz<br>Limit: ≥500.0 kHz<br>Margin: -17.06 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

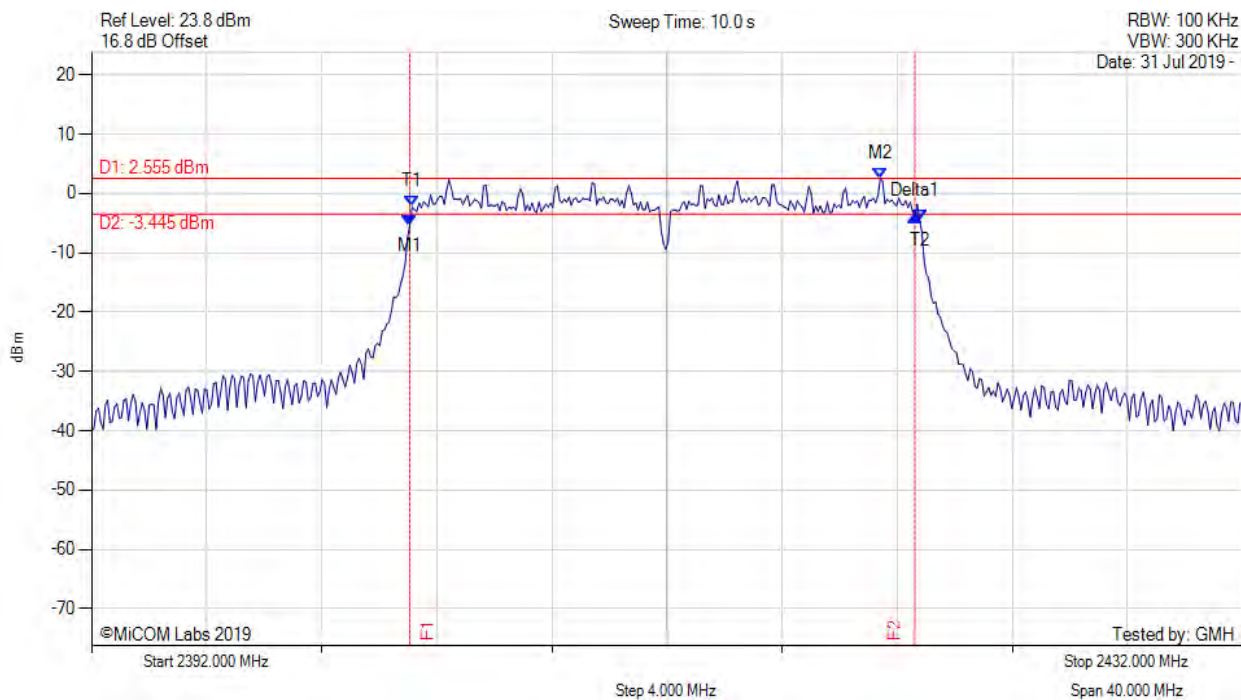


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results   |
|---|---|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2403.062 MHz : -5.337 dBm<br>M2 : 2419.415 MHz : 2.555 dBm<br>Delta1 : 17.555 MHz : 1.538 dB<br>T1 : 2403.142 MHz : -2.216 dBm<br>T2 : 2420.778 MHz : -4.434 dBm<br>OBW : 17.635 MHz | Measured 6 dB Bandwidth: 17.555 MHz<br>Limit: ≥500.0 kHz<br>Margin: -17.06 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

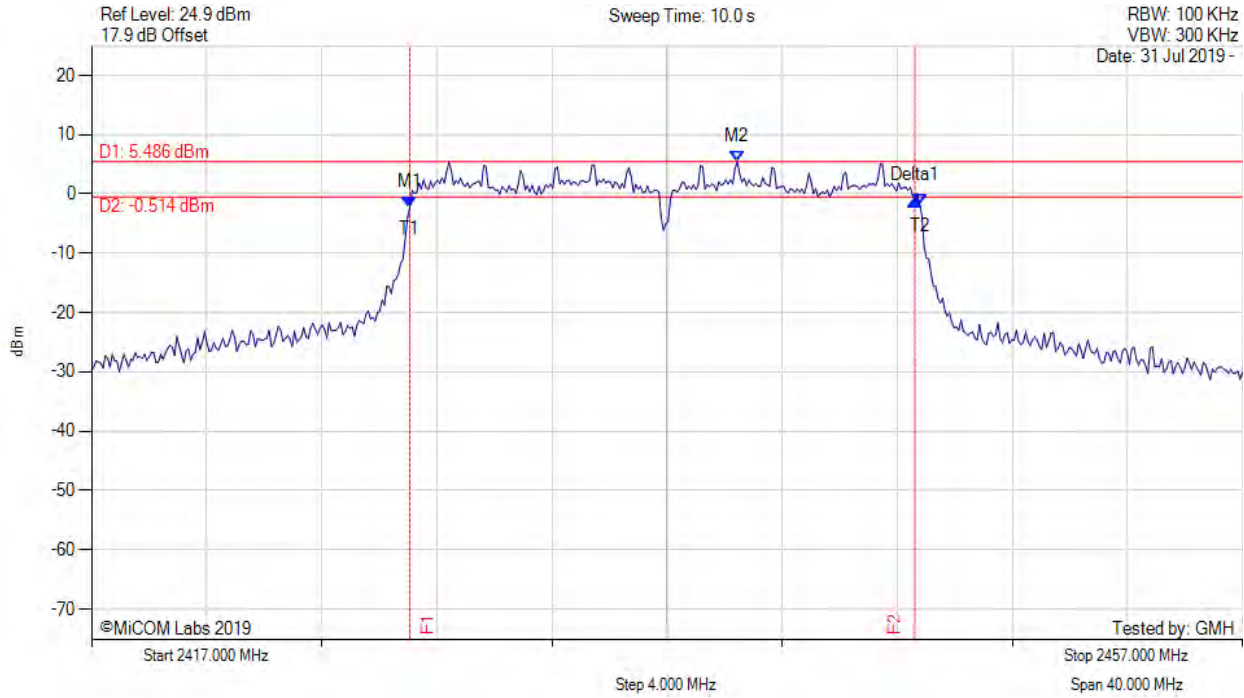


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results   |
|---|---|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2428.062 MHz : -2.265 dBm<br>M2 : 2439.445 MHz : 5.486 dBm<br>Delta1 : 17.555 MHz : 1.151 dB<br>T1 : 2428.062 MHz : -2.265 dBm<br>T2 : 2445.778 MHz : -1.764 dBm<br>OBW : 17.715 MHz | Measured 6 dB Bandwidth: 17.555 MHz<br>Limit: $\geq 500.0$ kHz<br>Margin: -17.06 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

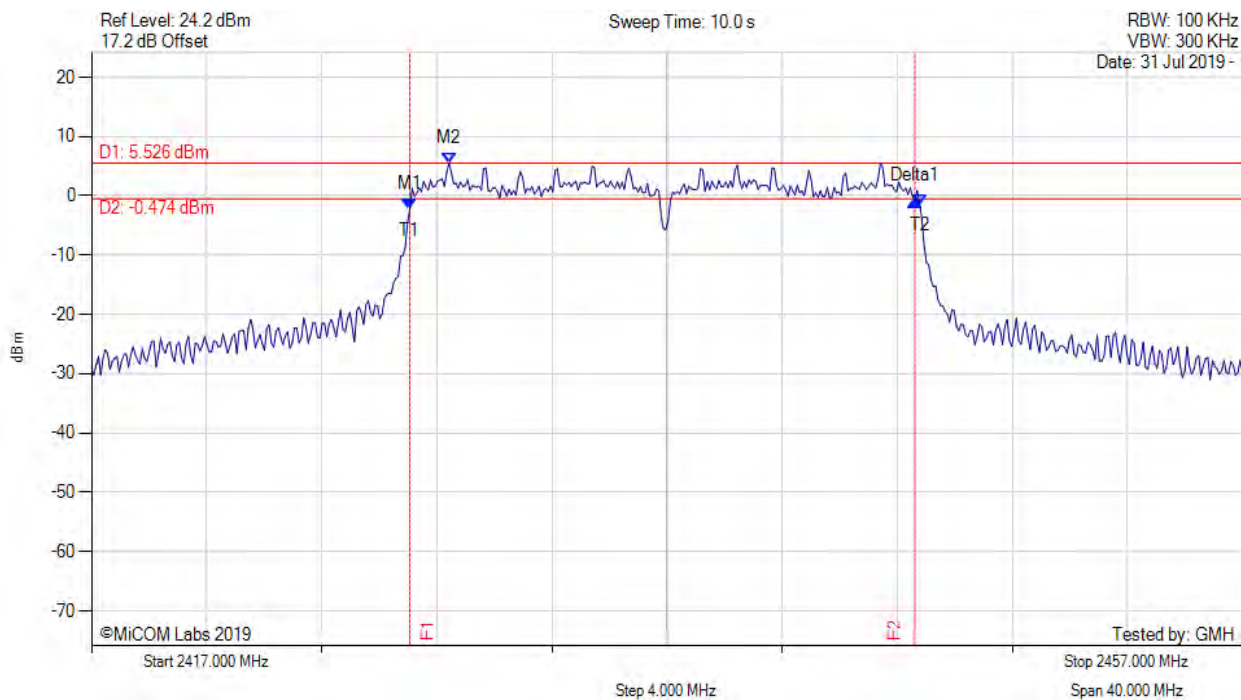


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results   |
|---|---|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2428.062 MHz : -2.290 dBm<br>M2 : 2429.425 MHz : 5.526 dBm<br>Delta1 : 17.555 MHz : 1.474 dB<br>T1 : 2428.062 MHz : -2.290 dBm<br>T2 : 2445.778 MHz : -1.421 dBm<br>OBW : 17.715 MHz | Measured 6 dB Bandwidth: 17.555 MHz<br>Limit: $\geq 500.0$ kHz<br>Margin: -17.06 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

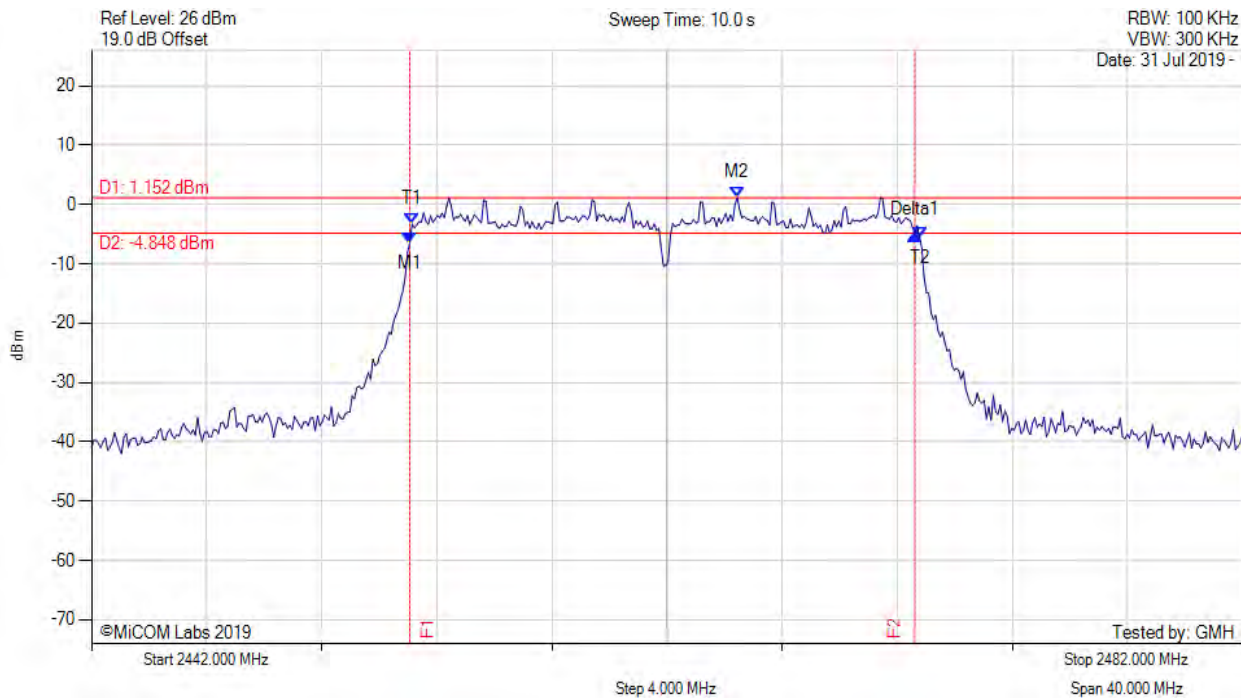


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results   |
|---|---|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2453.062 MHz : -6.398 dBm<br>M2 : 2464.445 MHz : 1.152 dBm<br>Delta1 : 17.555 MHz : 1.283 dB<br>T1 : 2453.142 MHz : -3.274 dBm<br>T2 : 2470.778 MHz : -5.535 dBm<br>OBW : 17.635 MHz | Measured 6 dB Bandwidth: 17.555 MHz<br>Limit: ≥500.0 kHz<br>Margin: -17.06 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

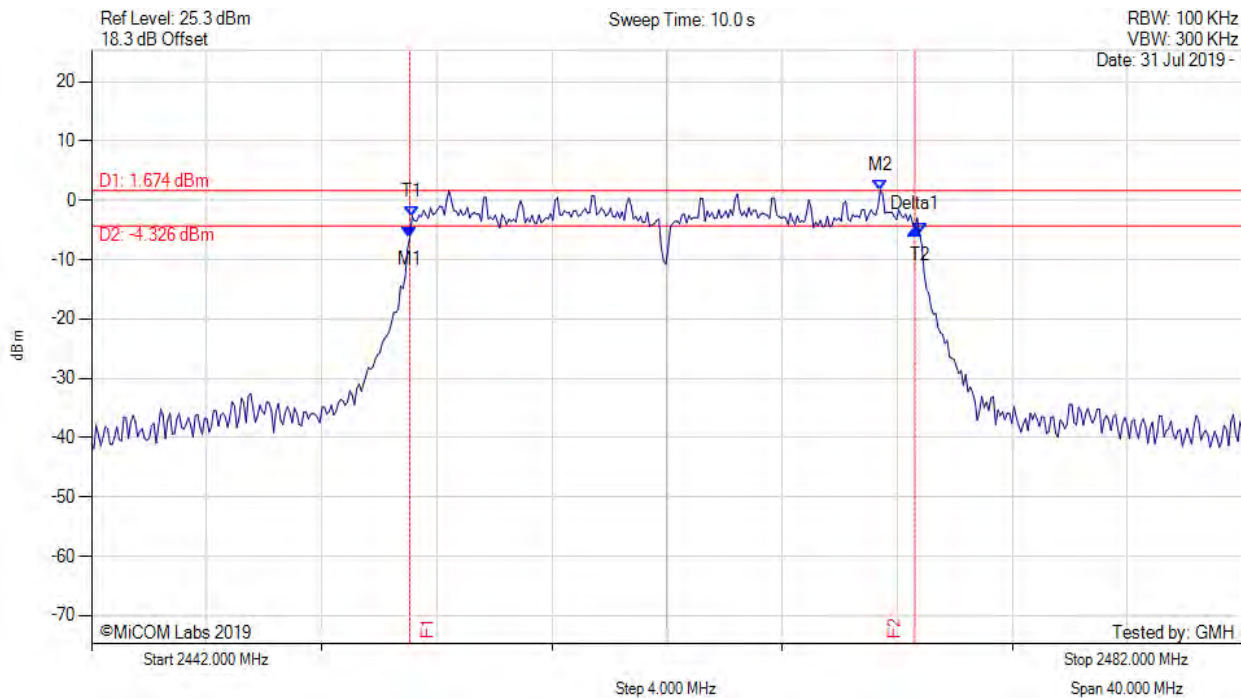


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results   |
|---|---|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2453.062 MHz : -6.260 dBm<br>M2 : 2469.415 MHz : 1.674 dBm<br>Delta1 : 17.555 MHz : 1.440 dB<br>T1 : 2453.142 MHz : -2.711 dBm<br>T2 : 2470.778 MHz : -5.654 dBm<br>OBW : 17.635 MHz | Measured 6 dB Bandwidth: 17.555 MHz<br>Limit: ≥500.0 kHz<br>Margin: -17.06 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

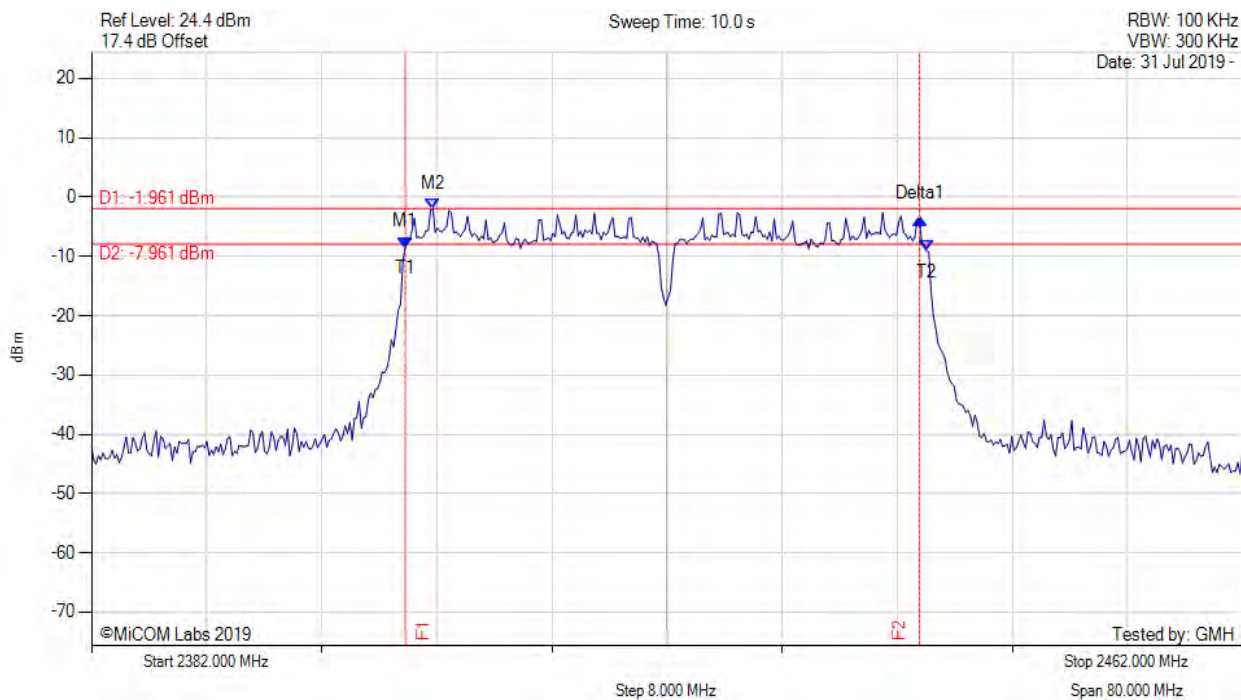


| Analyzer Setup  | Marker:Frequency:Amplitude   | Test Results   |
|---|--|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2403.804 MHz : -8.459 dBm<br>M2 : 2405.727 MHz : -1.961 dBm<br>Delta1 : 35.752 MHz : 4.767 dB<br>T1 : 2403.804 MHz : -8.459 dBm<br>T2 : 2440.036 MHz : -9.073 dBm<br>OBW : 36.232 MHz | Measured 6 dB Bandwidth: 35.752 MHz<br>Limit: ≥500.0 kHz<br>Margin: -35.25 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

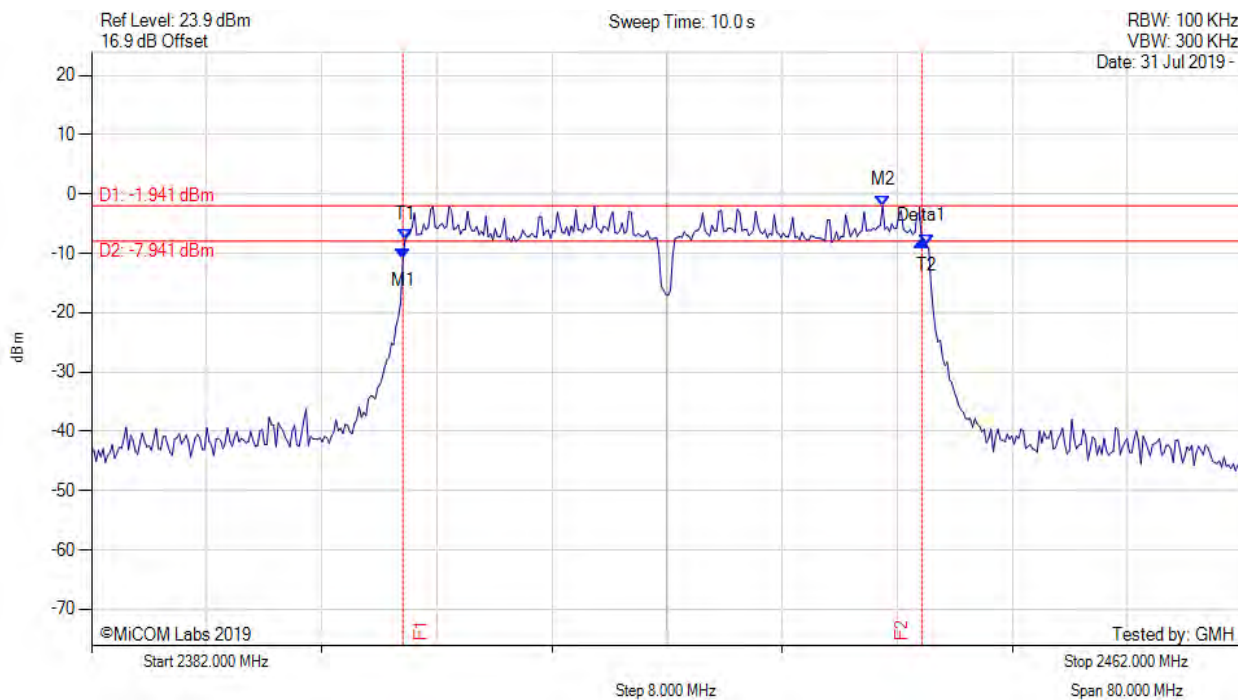

| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results   |
|---|---|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2403.643 MHz : -10.971 dBm<br>M2 : 2436.990 MHz : -1.941 dBm<br>Delta1 : 36.072 MHz : 3.040 dB<br>T1 : 2403.804 MHz : -7.584 dBm<br>T2 : 2440.036 MHz : -8.512 dBm<br>OBW : 36.232 MHz | Measured 6 dB Bandwidth: 36.072 MHz<br>Limit: ≥500.0 kHz<br>Margin: -35.57 MHz |


[back to matrix](#)



6 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

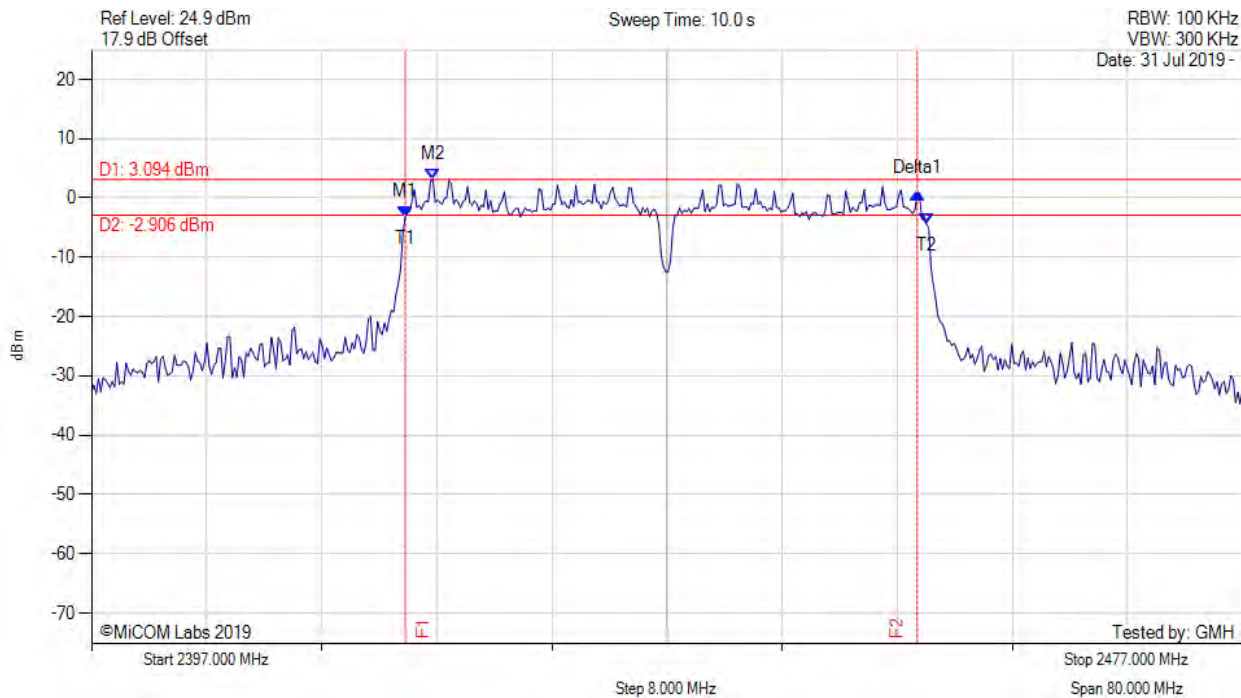


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results   |
|---|---|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2418.804 MHz : -3.188 dBm<br>M2 : 2420.727 MHz : 3.094 dBm<br>Delta1 : 35.591 MHz : 3.937 dB<br>T1 : 2418.804 MHz : -3.188 dBm<br>T2 : 2455.036 MHz : -4.351 dBm<br>OBW : 36.232 MHz | Measured 6 dB Bandwidth: 35.591 MHz<br>Limit: ≥500.0 kHz<br>Margin: -35.09 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

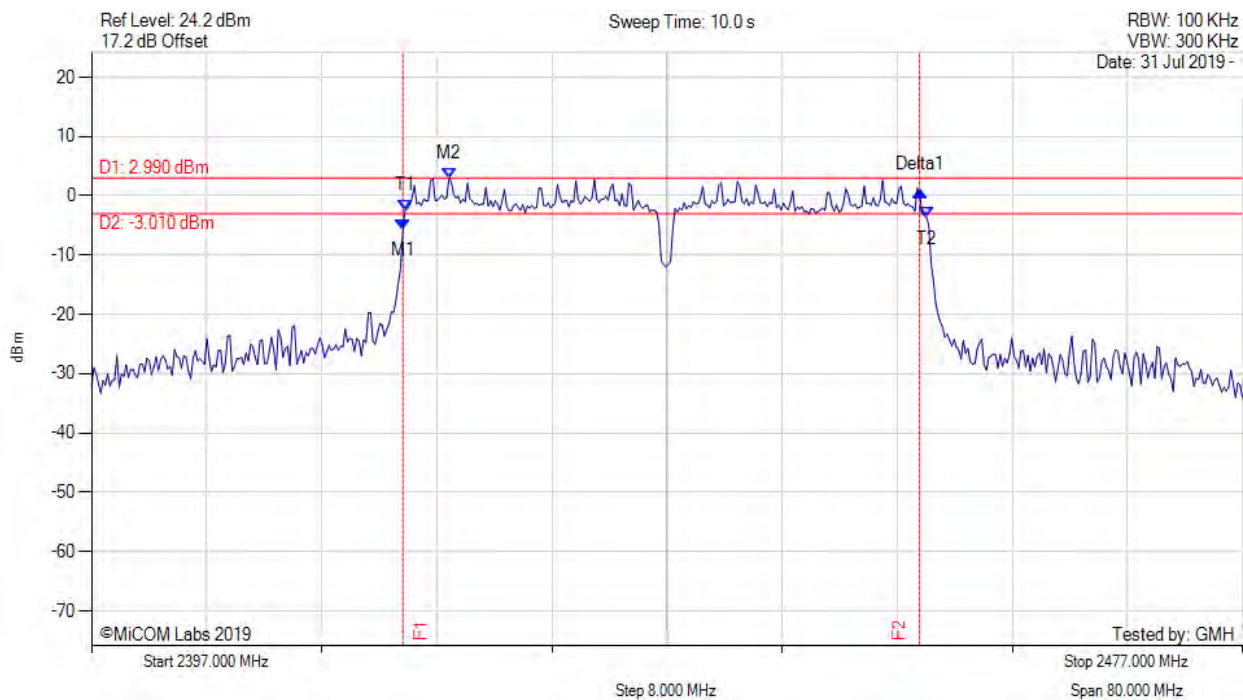


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results   |
|---|---|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2418.643 MHz : -5.655 dBm<br>M2 : 2421.850 MHz : 2.990 dBm<br>Delta1 : 35.912 MHz : 6.569 dB<br>T1 : 2418.804 MHz : -2.381 dBm<br>T2 : 2455.036 MHz : -3.662 dBm<br>OBW : 36.232 MHz | Measured 6 dB Bandwidth: 35.912 MHz<br>Limit: ≥500.0 kHz<br>Margin: -35.41 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

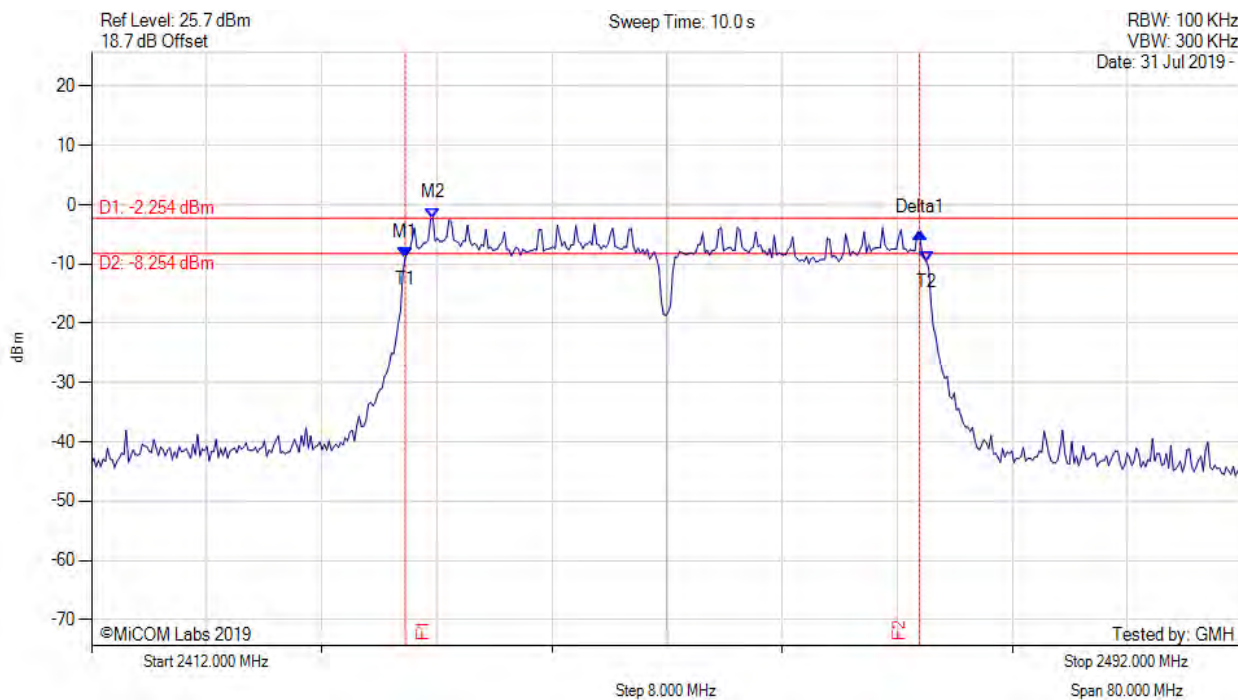


| Analyzer Setup  | Marker:Frequency:Amplitude   | Test Results   |
|---|--|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2433.804 MHz : -8.896 dBm<br>M2 : 2435.727 MHz : -2.254 dBm<br>Delta1 : 35.752 MHz : 4.098 dB<br>T1 : 2433.804 MHz : -8.896 dBm<br>T2 : 2470.036 MHz : -9.571 dBm<br>OBW : 36.232 MHz | Measured 6 dB Bandwidth: 35.752 MHz<br>Limit: ≥500.0 kHz<br>Margin: -35.25 MHz |

[back to matrix](#)

6 dB & 99% BANDWIDTH



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

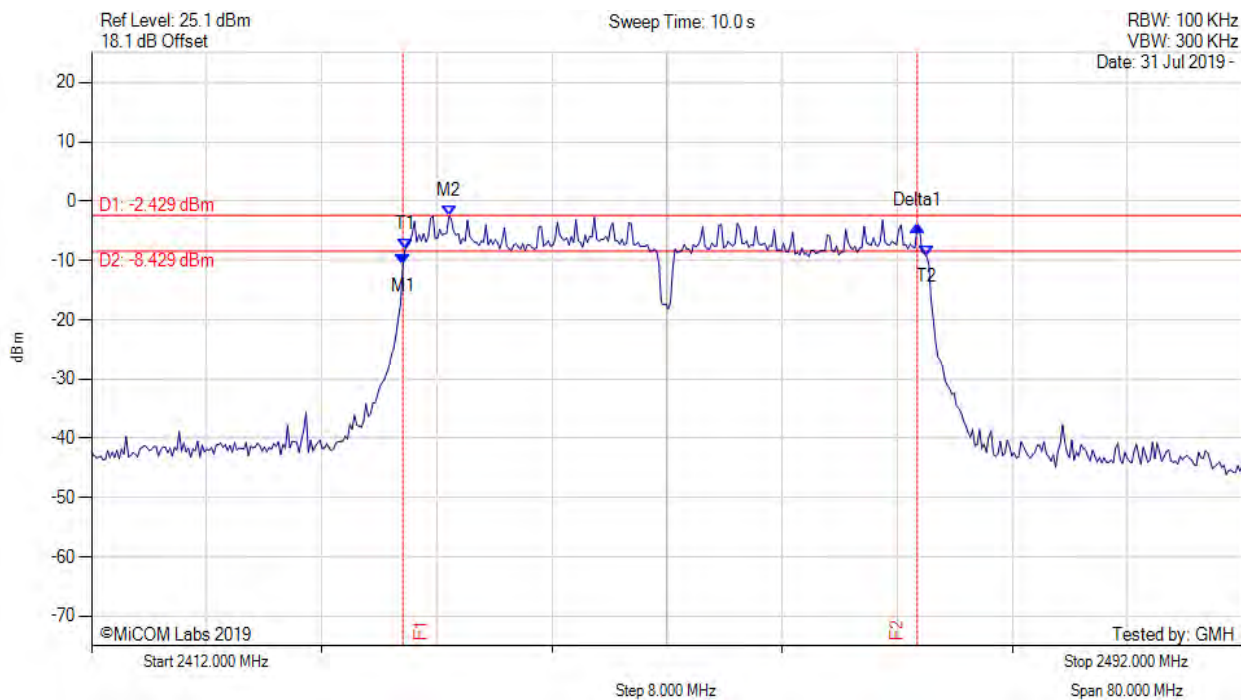

| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results   |
|---|---|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = MAX HOLD | M1 : 2433.643 MHz : -10.678 dBm<br>M2 : 2436.850 MHz : -2.429 dBm<br>Delta1 : 35.752 MHz : 6.463 dB<br>T1 : 2433.804 MHz : -8.040 dBm<br>T2 : 2470.036 MHz : -9.201 dBm<br>OBW : 36.232 MHz | Measured 6 dB Bandwidth: 35.752 MHz<br>Limit: ≥500.0 kHz<br>Margin: -35.25 MHz |


[back to matrix](#)

## A.2. Power Spectral Density

### POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2412.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

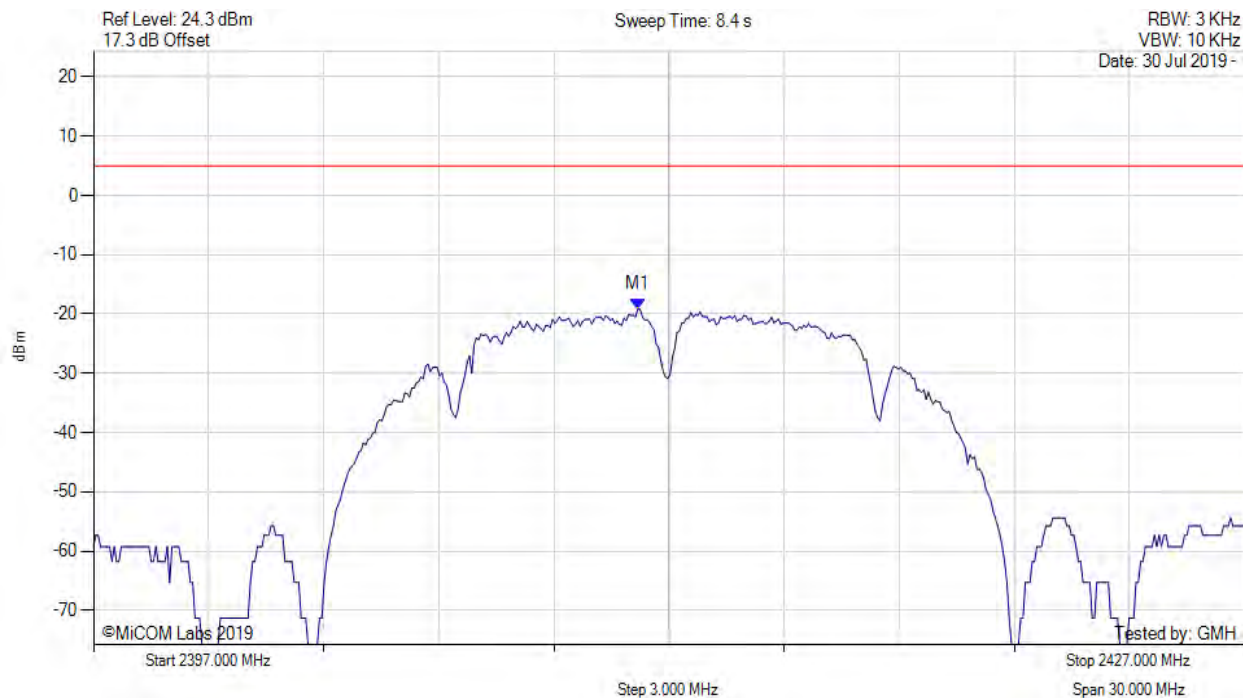


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results            |
|--|---------------------------------|-------------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2411.188 MHz : -19.159 dBm | Limit: $\leq 4.990$ dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

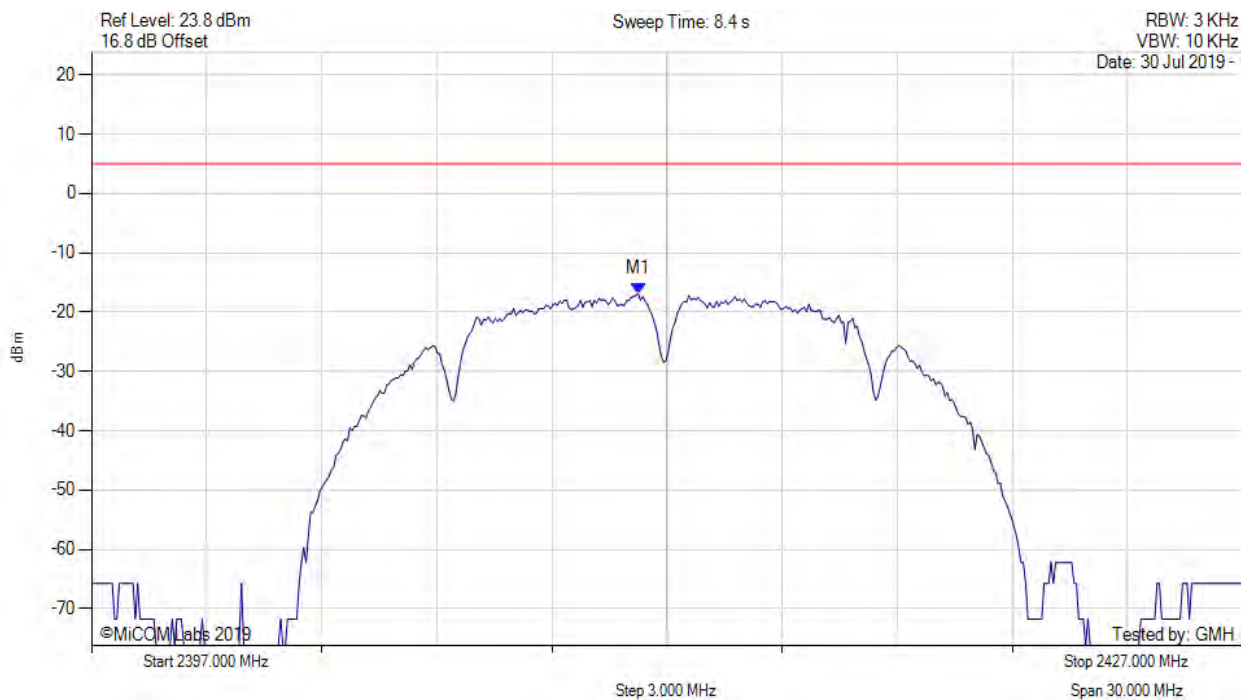


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2411.248 MHz : -16.879 dBm | Limit: ≤ 4.990 dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2412.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

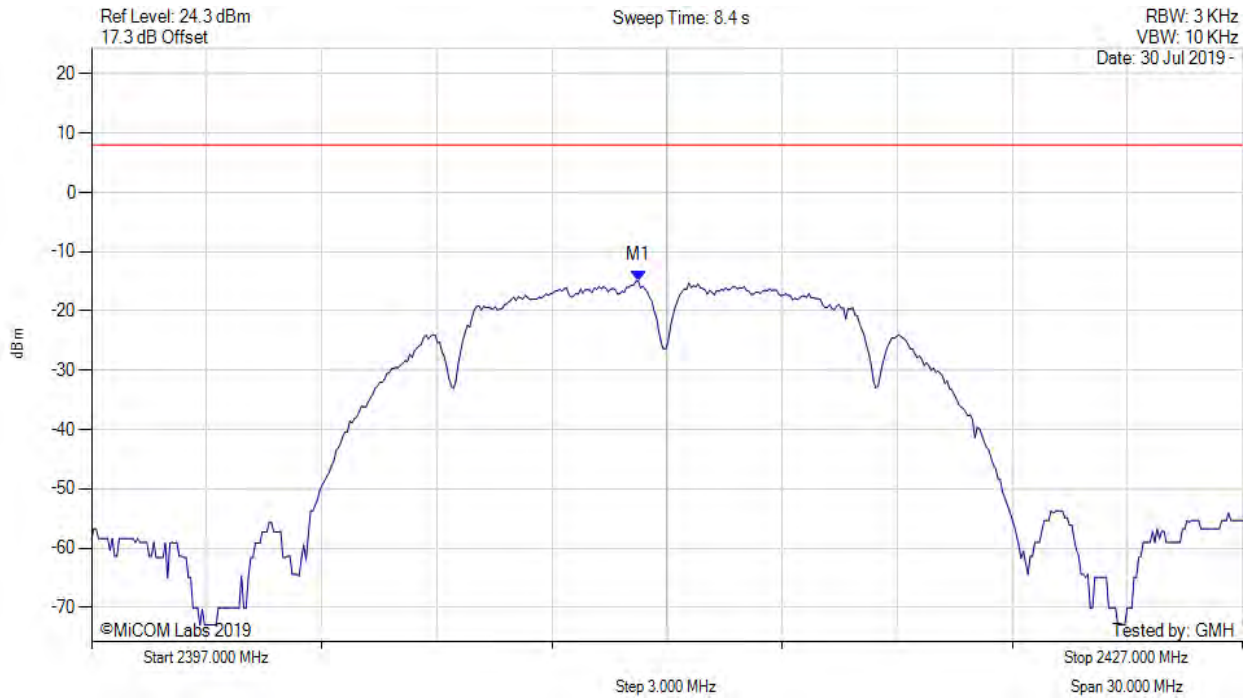


| Analyzer Setup   | Marker:Frequency:Amplitude   | Test Results                              |
|--|--|---|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2411.200 MHz : -14.877 dBm<br>M1 + DCCF : 2411.200 MHz : -14.833 dBm<br>Duty Cycle Correction Factor : +0.04 dB | Limit: $\leq 8.0$ dBm<br>Margin: -22.8 dB |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

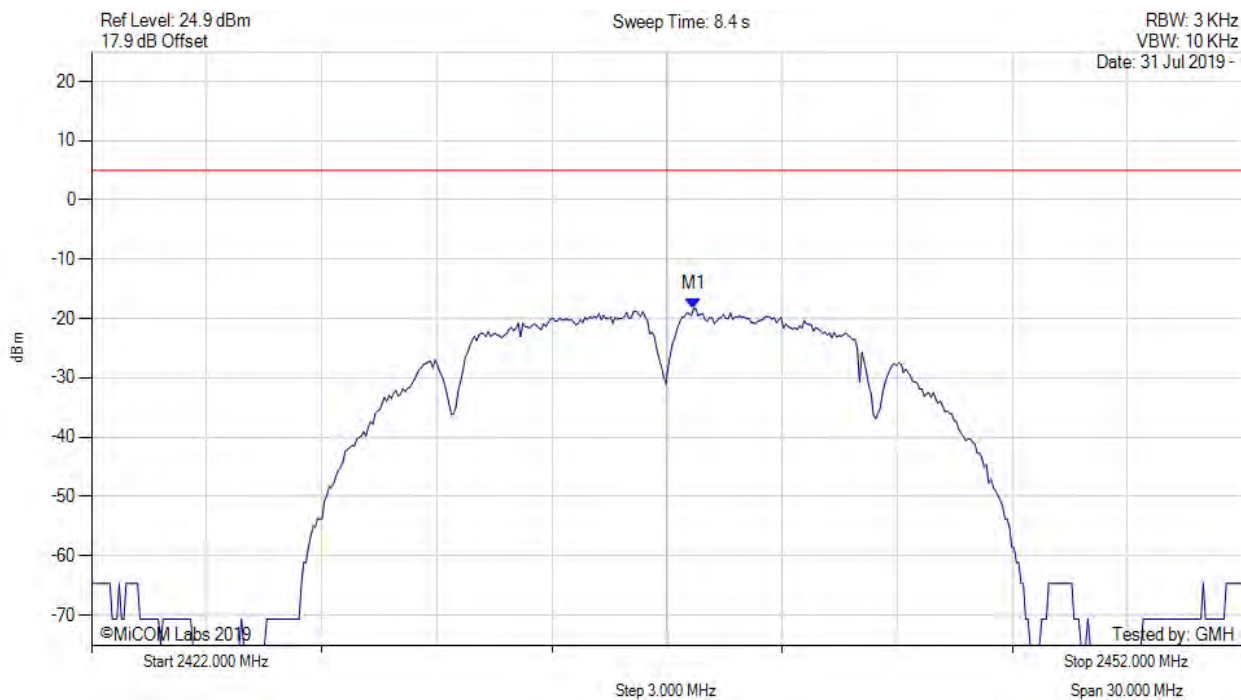

| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2437.691 MHz : -18.325 dBm | Limit: ≤ 4.990 dBm |


[back to matrix](#)



POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

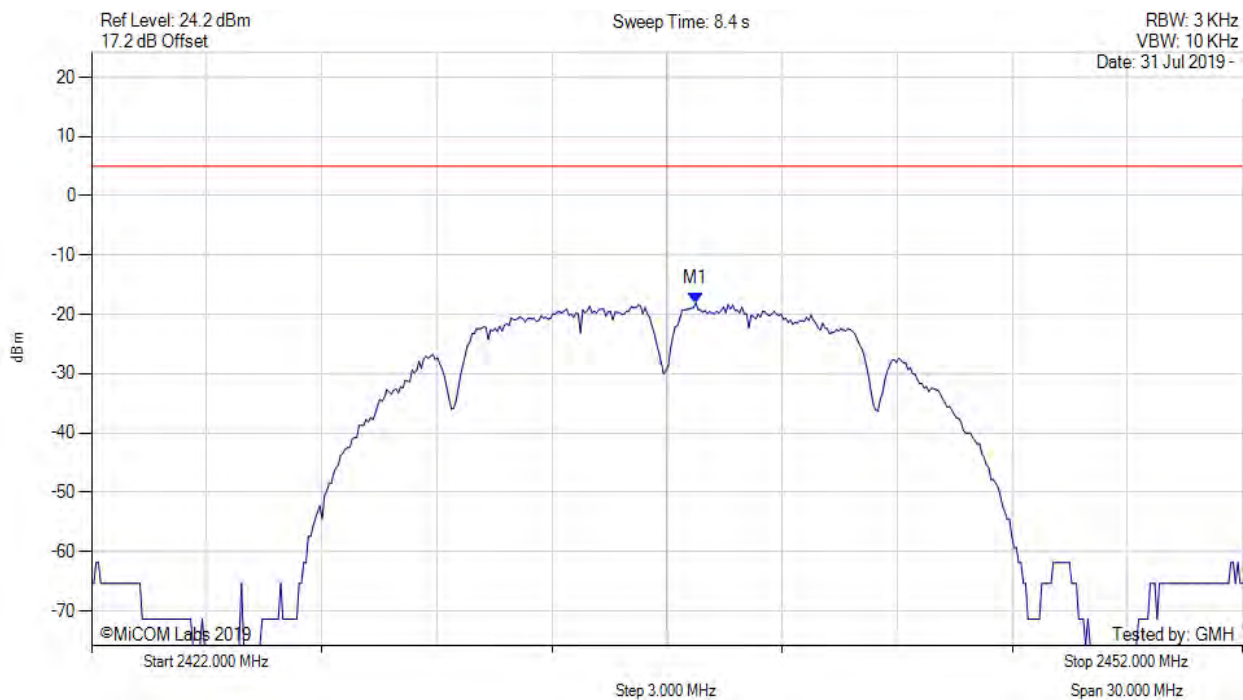


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2437.752 MHz : -18.035 dBm | Limit: ≤ 4.990 dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2437.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

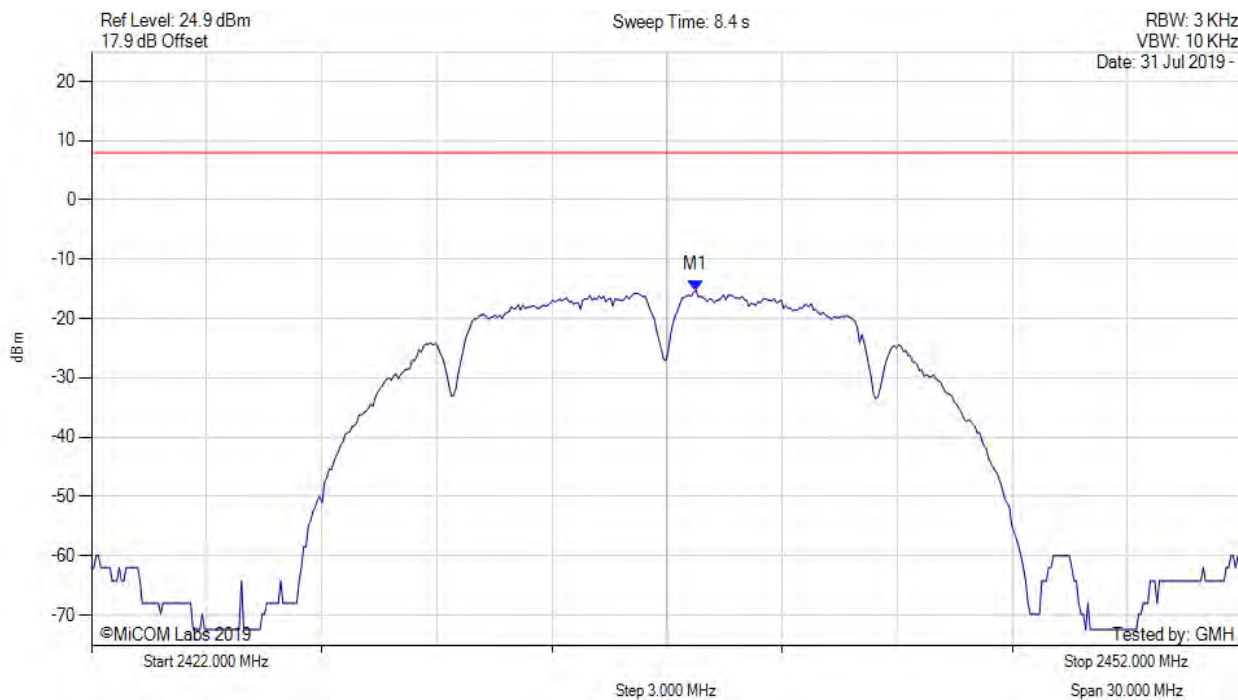


| Analyzer Setup   | Marker:Frequency:Amplitude   | Test Results                              |
|--|--|---|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2437.800 MHz : -15.198 dBm<br>M1 + DCCF : 2437.800 MHz : -15.154 dBm<br>Duty Cycle Correction Factor : +0.04 dB | Limit: $\leq 8.0$ dBm<br>Margin: -23.2 dB |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

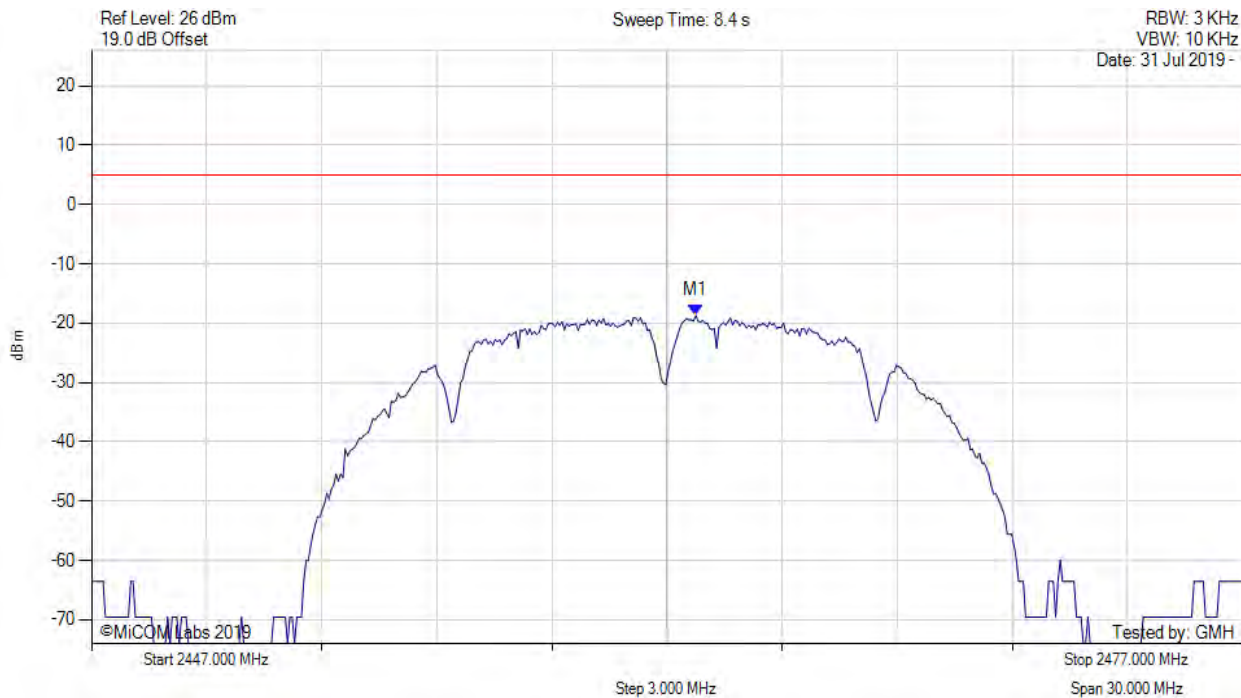


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2462.752 MHz : -18.734 dBm | Limit: ≤ 4.990 dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

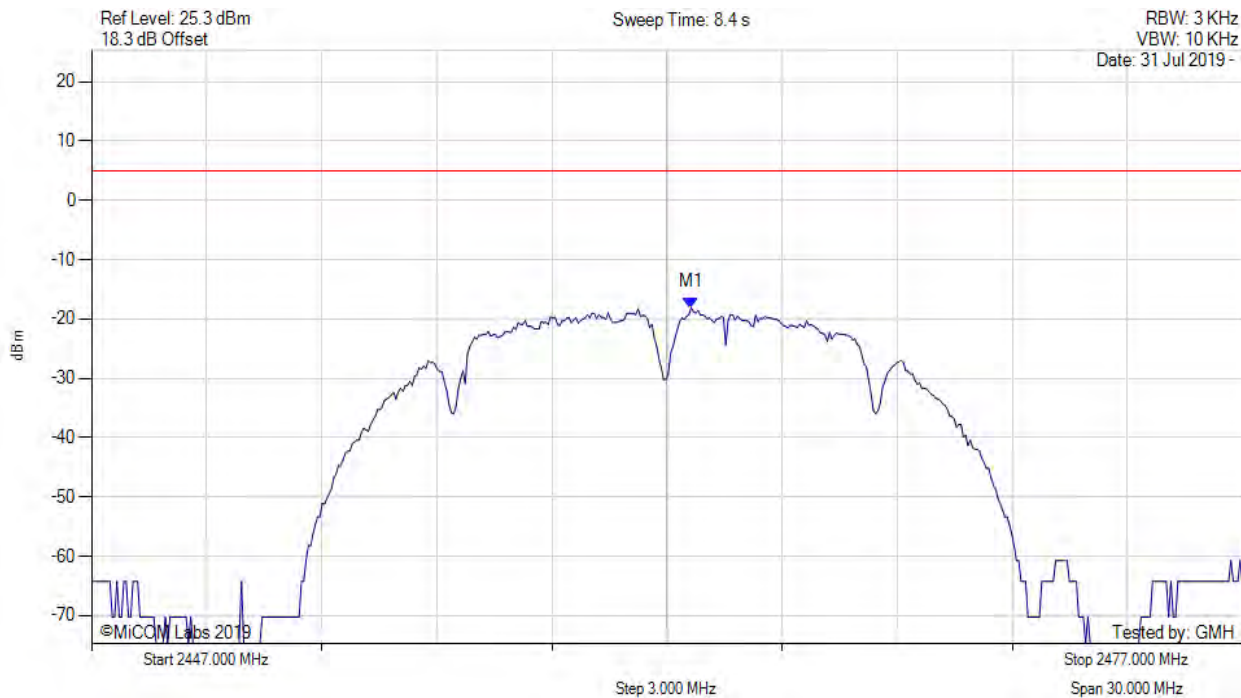


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2462.631 MHz : -18.095 dBm | Limit: ≤ 4.990 dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11b, Channel: 2462.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

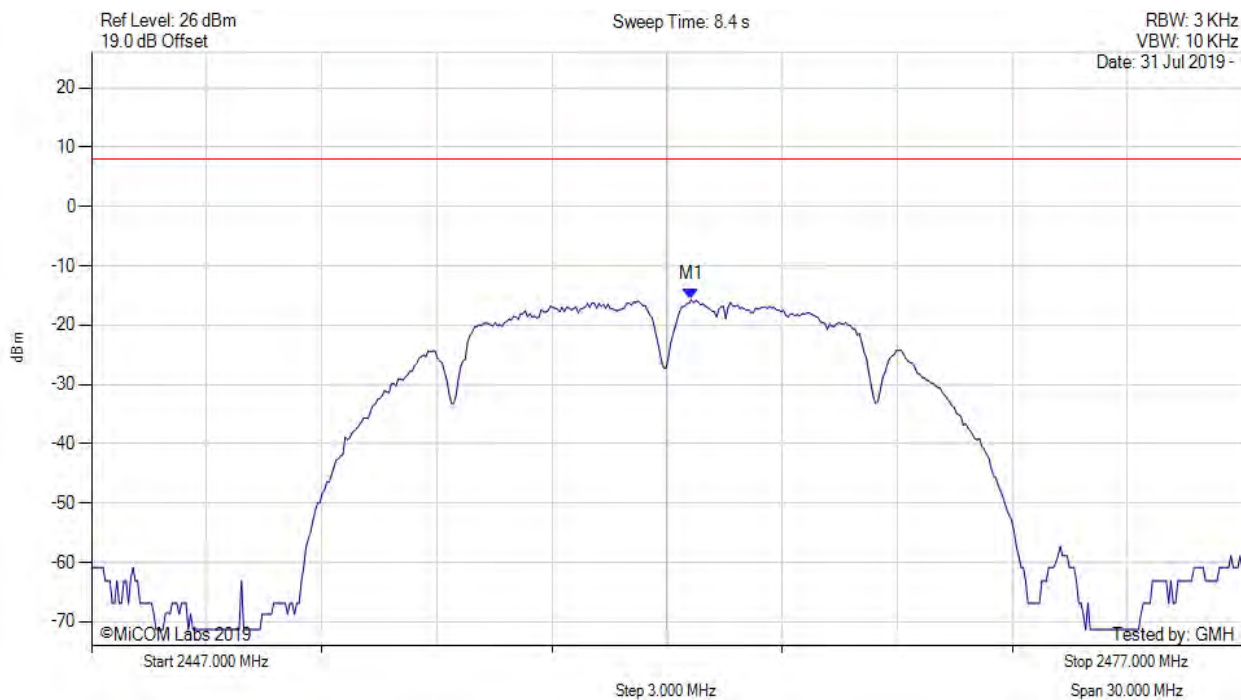


| Analyzer Setup   | Marker:Frequency:Amplitude   | Test Results                              |
|--|--|---|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2462.600 MHz : -15.703 dBm<br>M1 + DCCF : 2462.600 MHz : -15.659 dBm<br>Duty Cycle Correction Factor : +0.04 dB | Limit: $\leq 8.0$ dBm<br>Margin: -23.7 dB |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2412.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

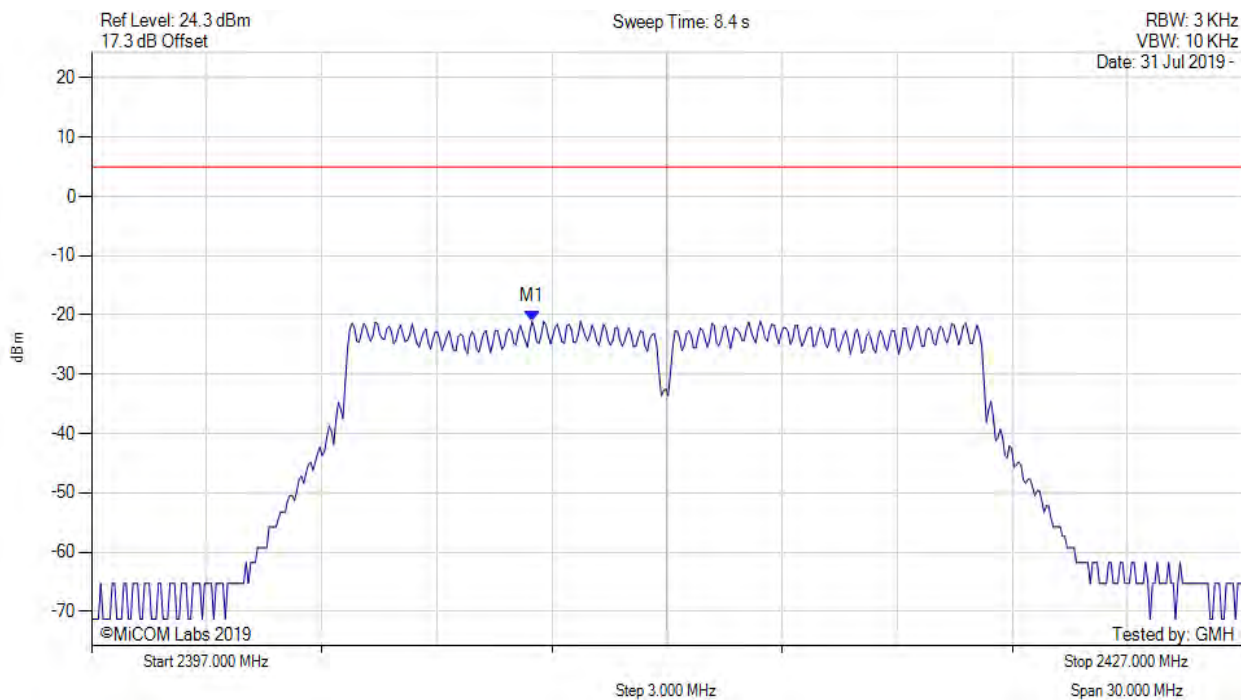


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2408.483 MHz : -21.054 dBm | Limit: ≤ 4.990 dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

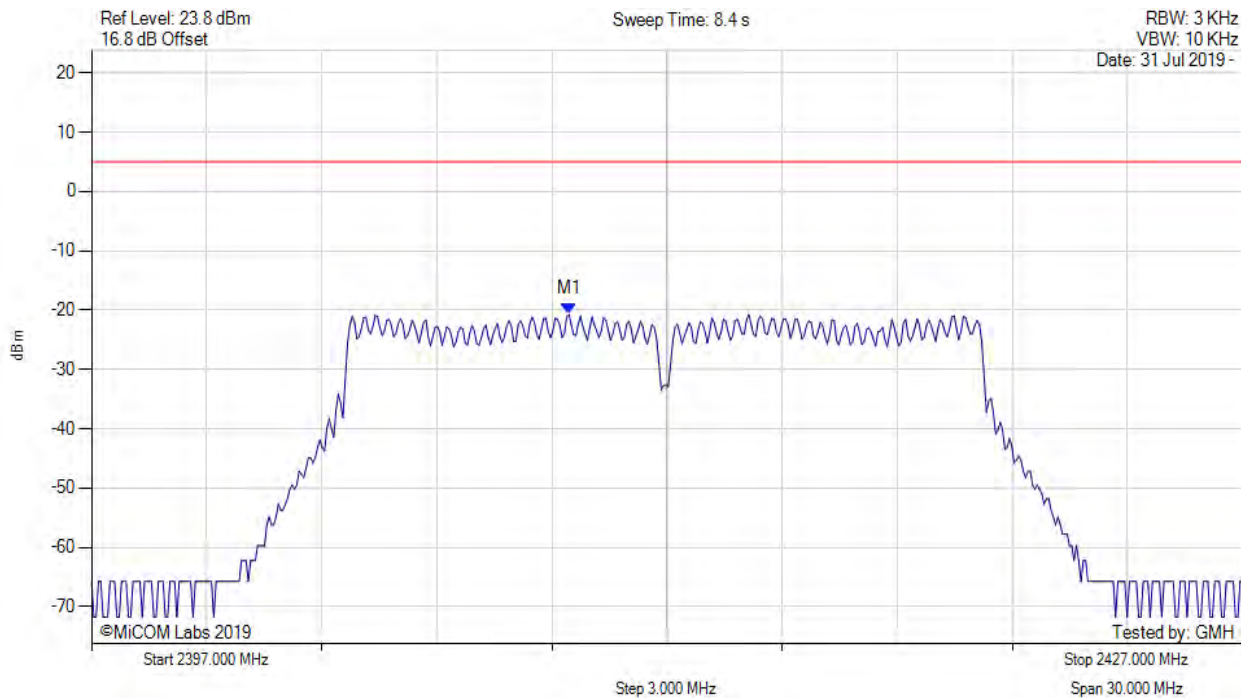


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2409.445 MHz : -20.712 dBm | Limit: ≤ 4.990 dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2412.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

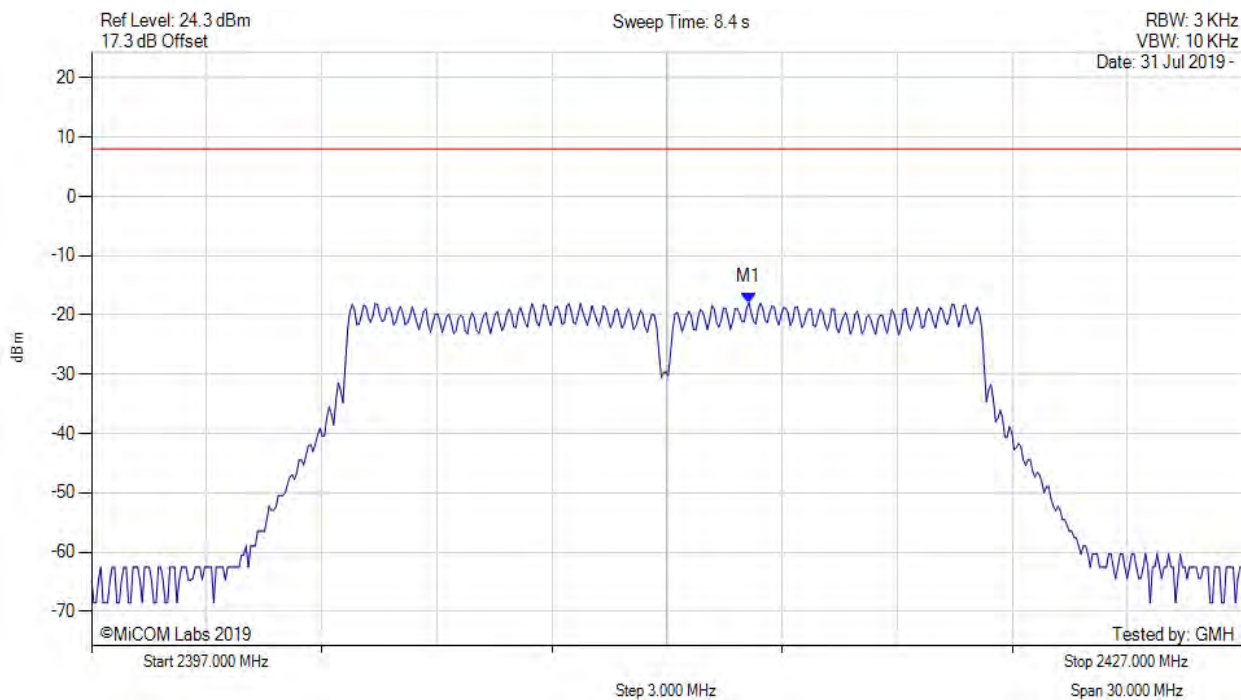

| Analyzer Setup   | Marker:Frequency:Amplitude   | Test Results                              |
|--|--|---|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2414.100 MHz : -17.921 dBm<br>M1 + DCCF : 2414.100 MHz : -17.833 dBm<br>Duty Cycle Correction Factor : +0.09 dB | Limit: $\leq 8.0$ dBm<br>Margin: -25.8 dB |


[back to matrix](#)



POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

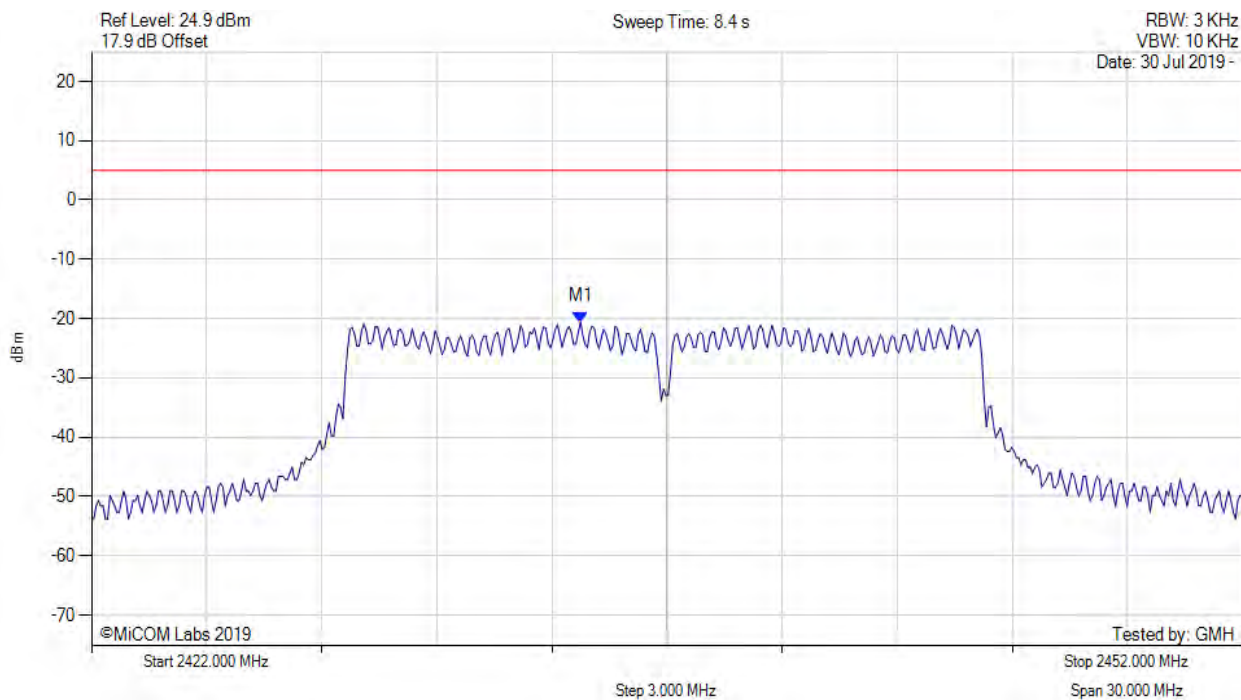


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2434.745 MHz : -20.590 dBm | Limit: ≤ 4.990 dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

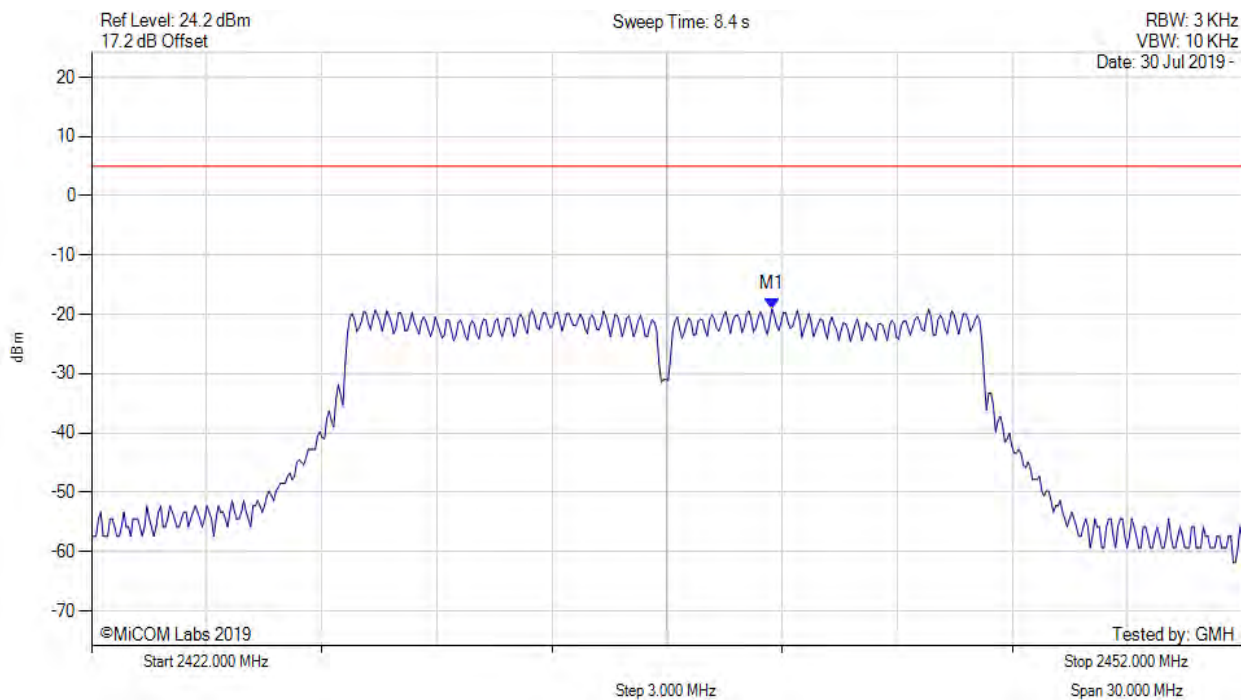


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2439.735 MHz : -19.067 dBm | Limit: ≤ 4.990 dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2437.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

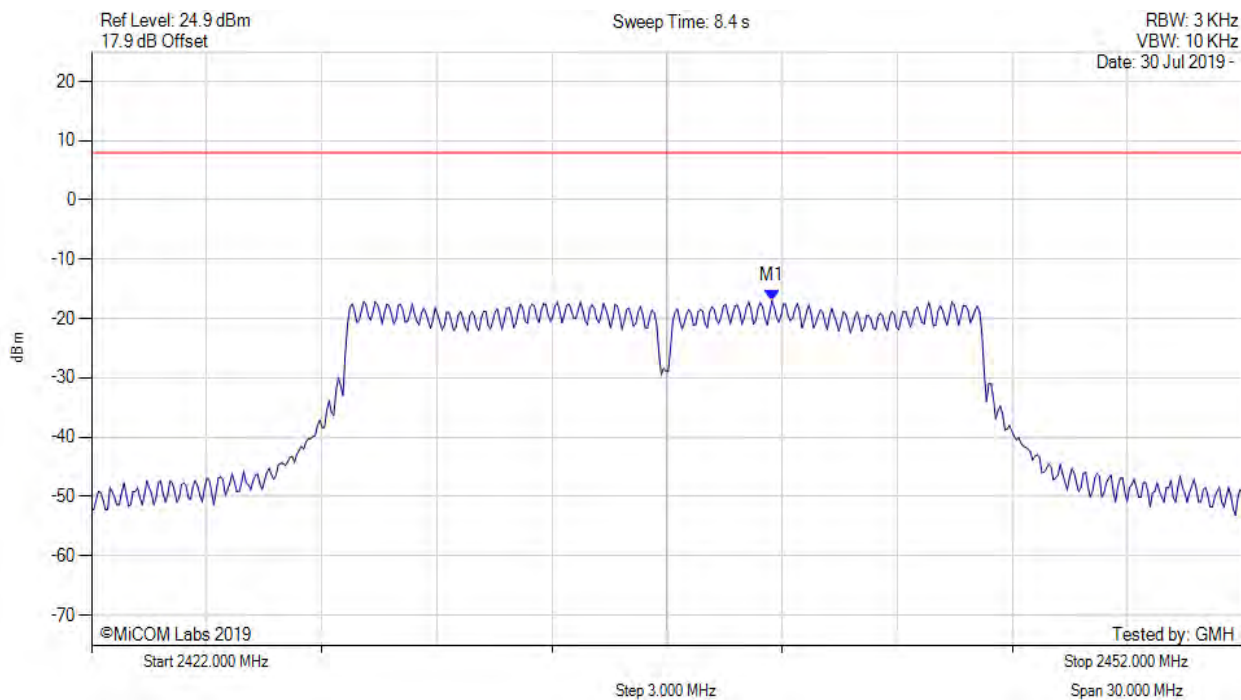


| Analyzer Setup   | Marker:Frequency:Amplitude   | Test Results                              |
|--|--|---|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2439.700 MHz : -16.987 dBm<br>M1 + DCCF : 2439.700 MHz : -16.899 dBm<br>Duty Cycle Correction Factor : +0.09 dB | Limit: $\leq 8.0$ dBm<br>Margin: -24.9 dB |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

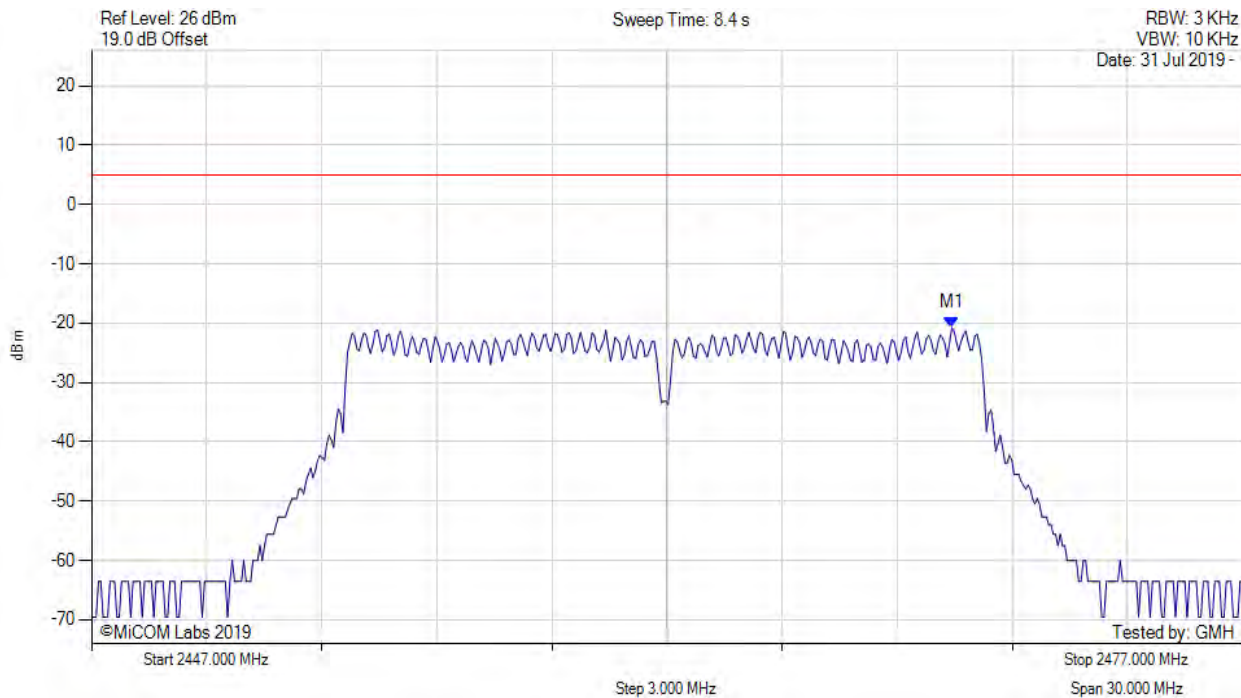


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2469.425 MHz : -20.779 dBm | Limit: ≤ 4.990 dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

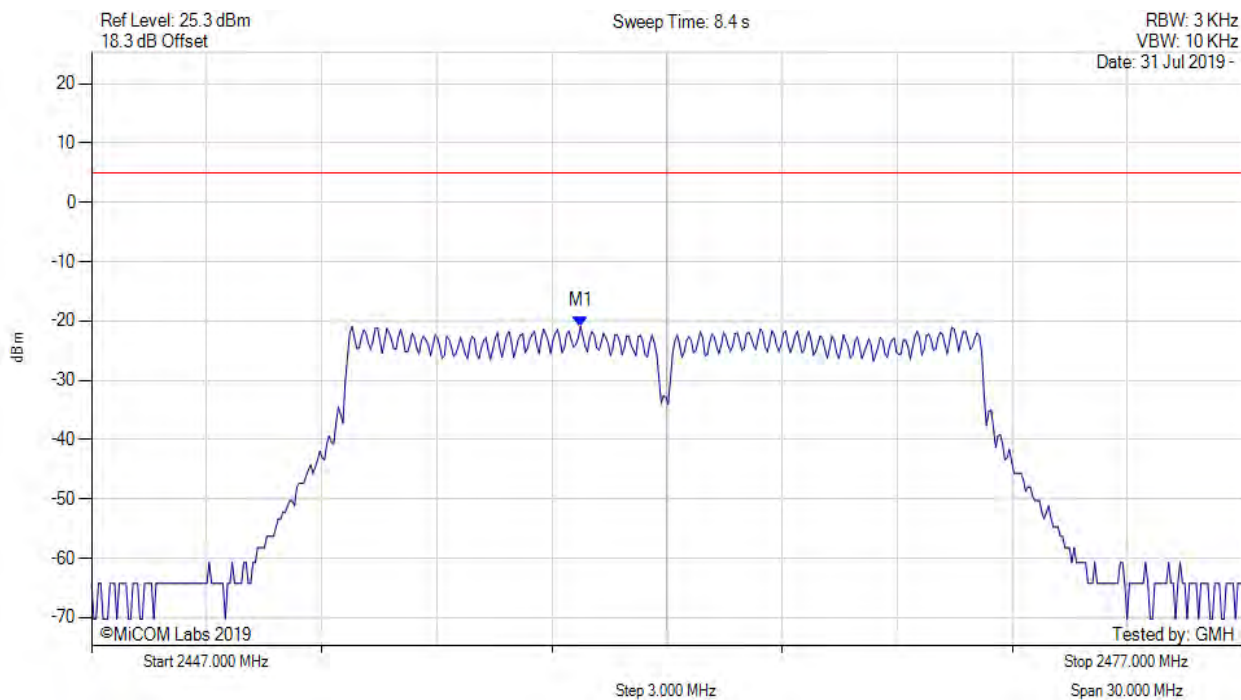


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2459.745 MHz : -20.898 dBm | Limit: ≤ 4.990 dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11g, Channel: 2462.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

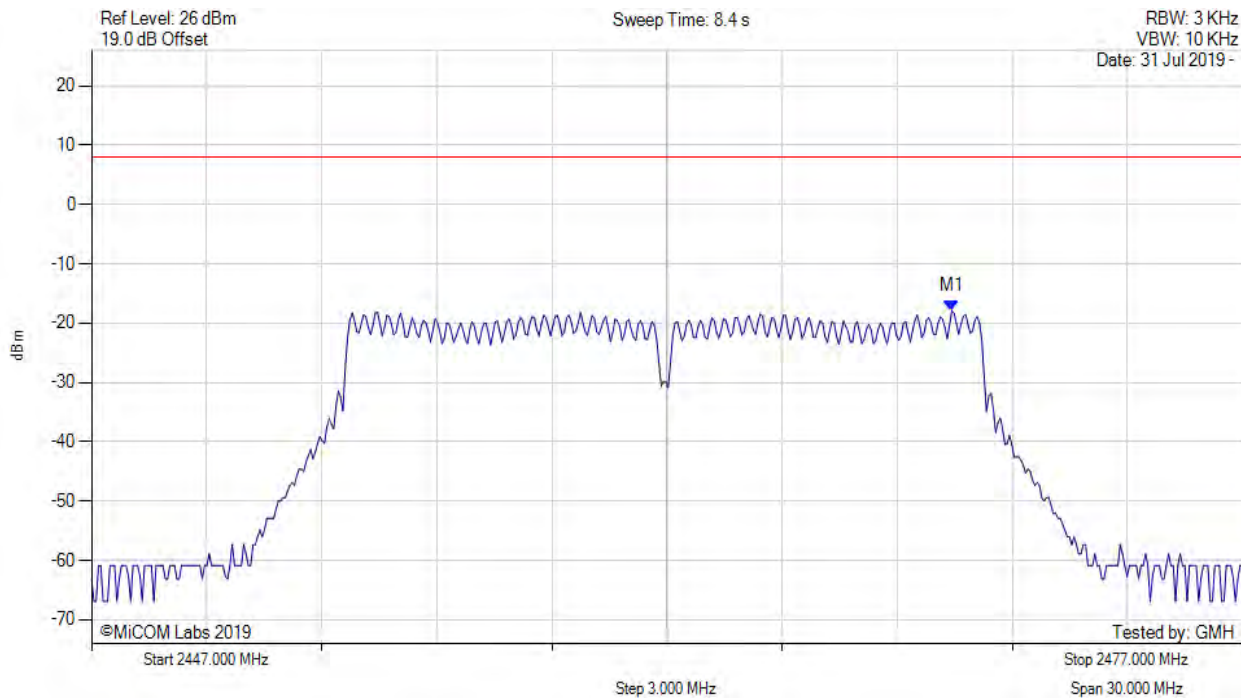


| Analyzer Setup   | Marker:Frequency:Amplitude   | Test Results                              |
|--|--|---|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2469.400 MHz : -17.915 dBm<br>M1 + DCCF : 2469.400 MHz : -17.827 dBm<br>Duty Cycle Correction Factor : +0.09 dB | Limit: $\leq 8.0$ dBm<br>Margin: -25.8 dB |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

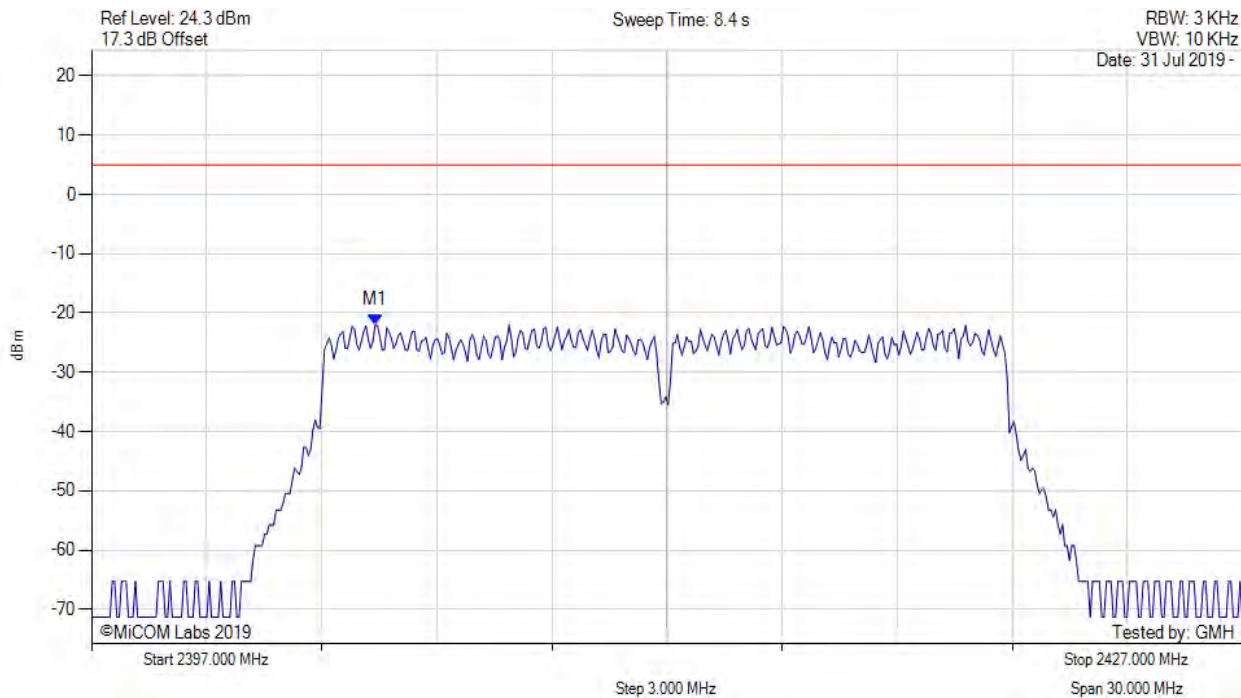


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2404.395 MHz : -21.987 dBm | Limit: ≤ 4.990 dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

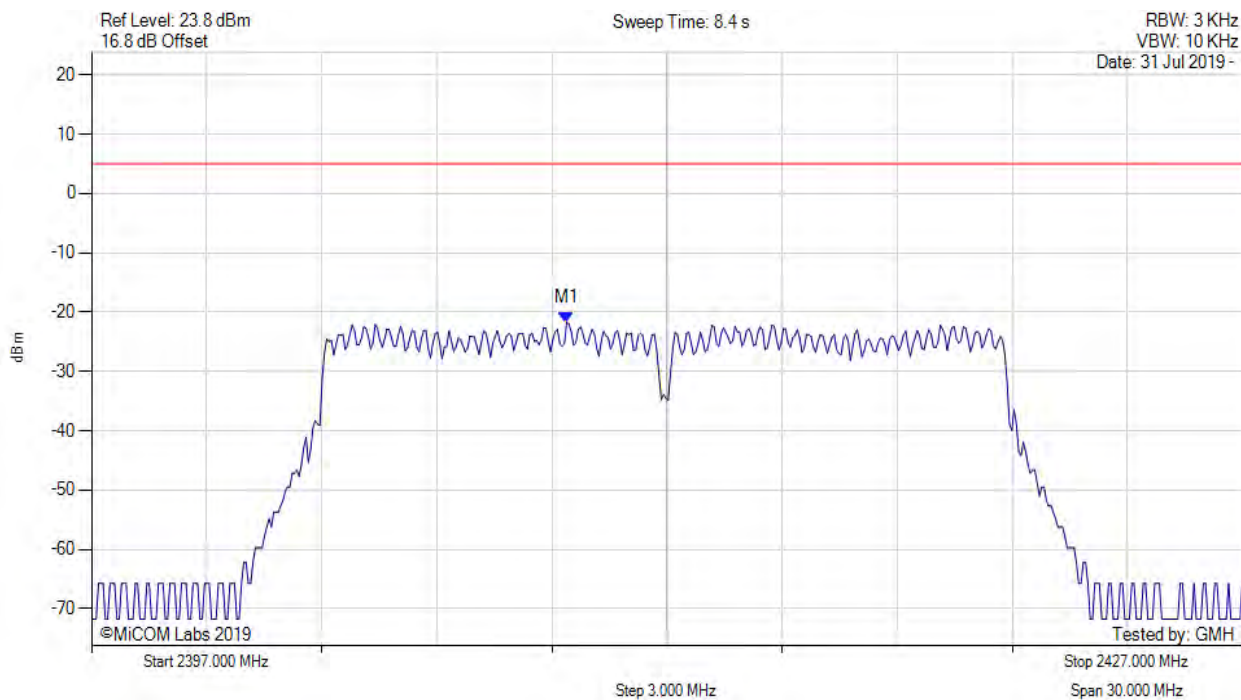

| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2409.385 MHz : -21.717 dBm | Limit: ≤ 4.990 dBm |


[back to matrix](#)



POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2412.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

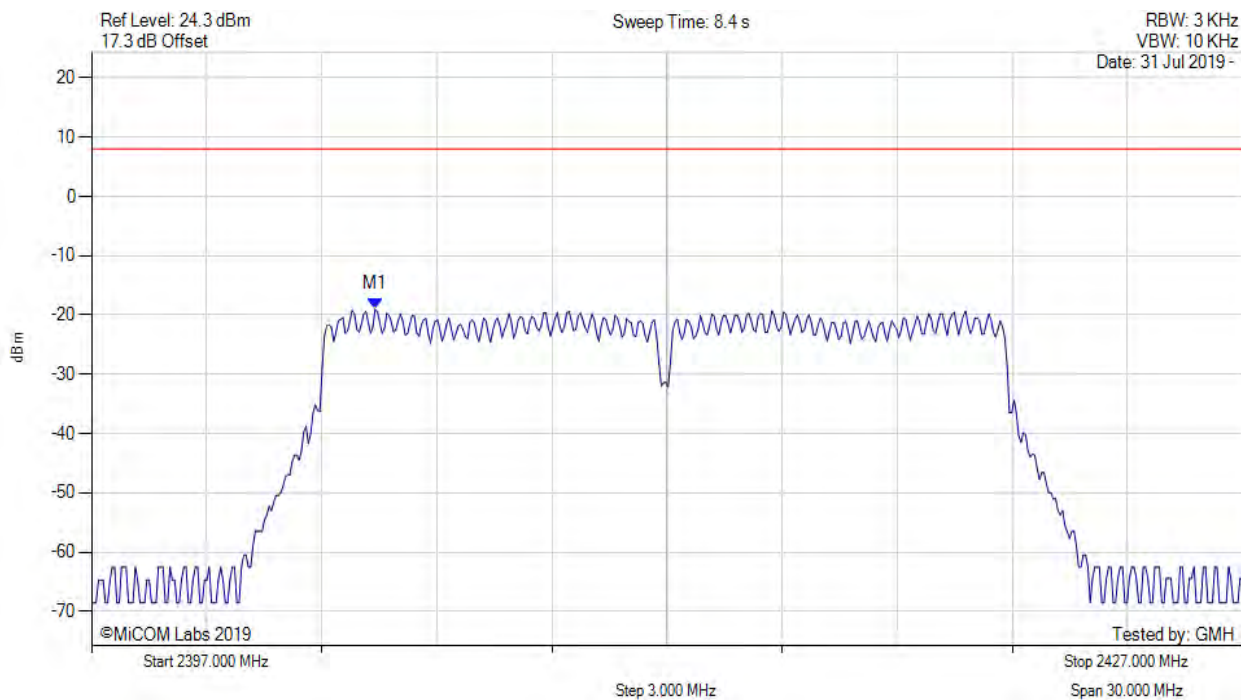


| Analyzer Setup   | Marker:Frequency:Amplitude   | Test Results                              |
|--|--|---|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2404.400 MHz : -19.009 dBm<br>M1 + DCCF : 2404.400 MHz : -18.921 dBm<br>Duty Cycle Correction Factor : +0.09 dB | Limit: $\leq 8.0$ dBm<br>Margin: -26.9 dB |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

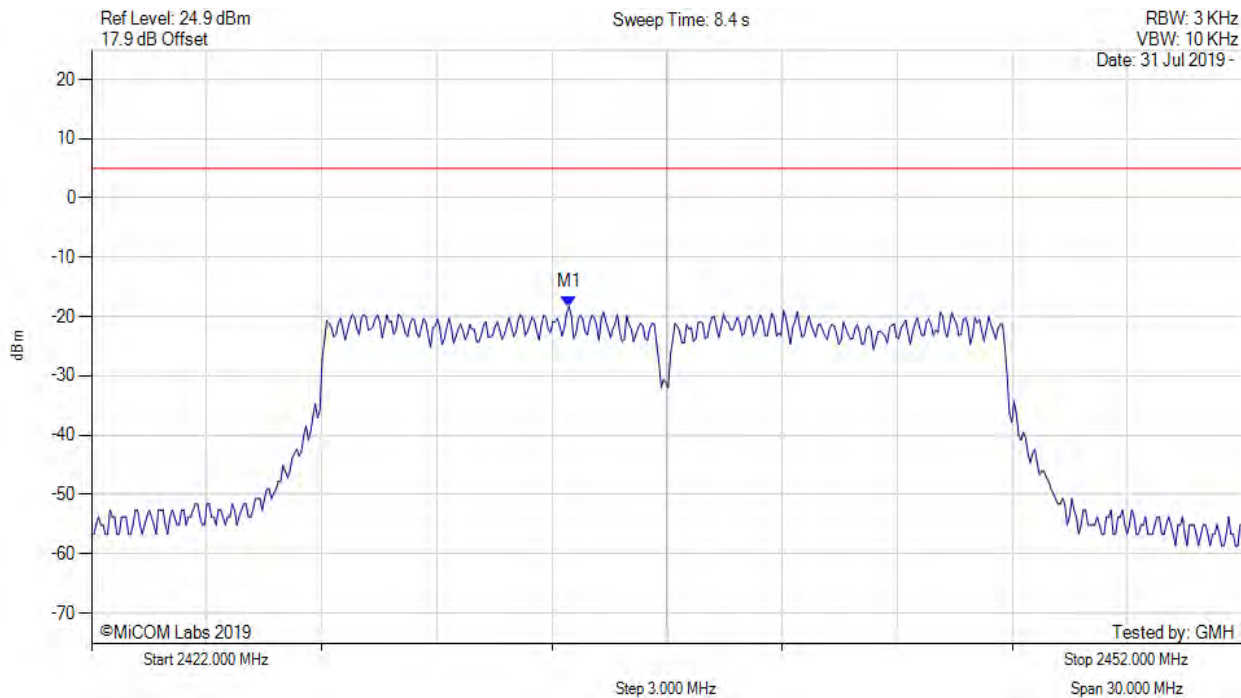


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2434.445 MHz : -18.325 dBm | Limit: ≤ 4.990 dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

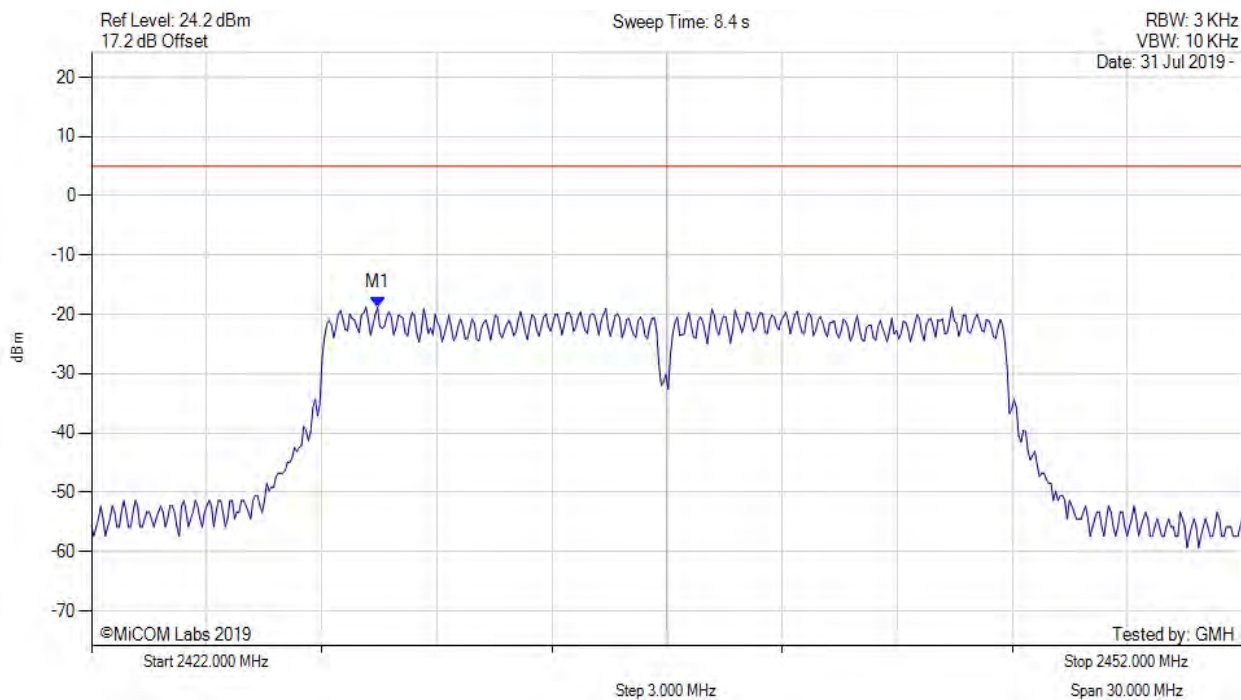


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2429.455 MHz : -18.777 dBm | Limit: ≤ 4.990 dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2437.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

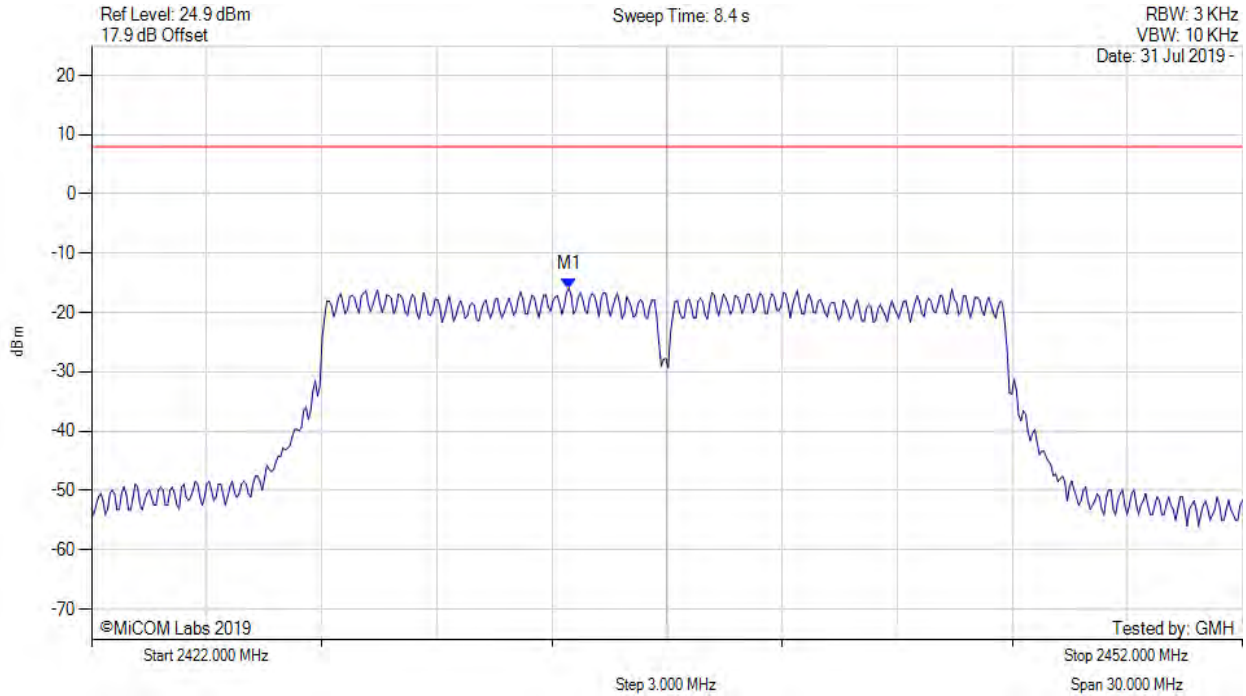


| Analyzer Setup   | Marker:Frequency:Amplitude   | Test Results                              |
|--|--|---|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2434.400 MHz : -15.930 dBm<br>M1 + DCCF : 2434.400 MHz : -15.842 dBm<br>Duty Cycle Correction Factor : +0.09 dB | Limit: $\leq 8.0$ dBm<br>Margin: -23.9 dB |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

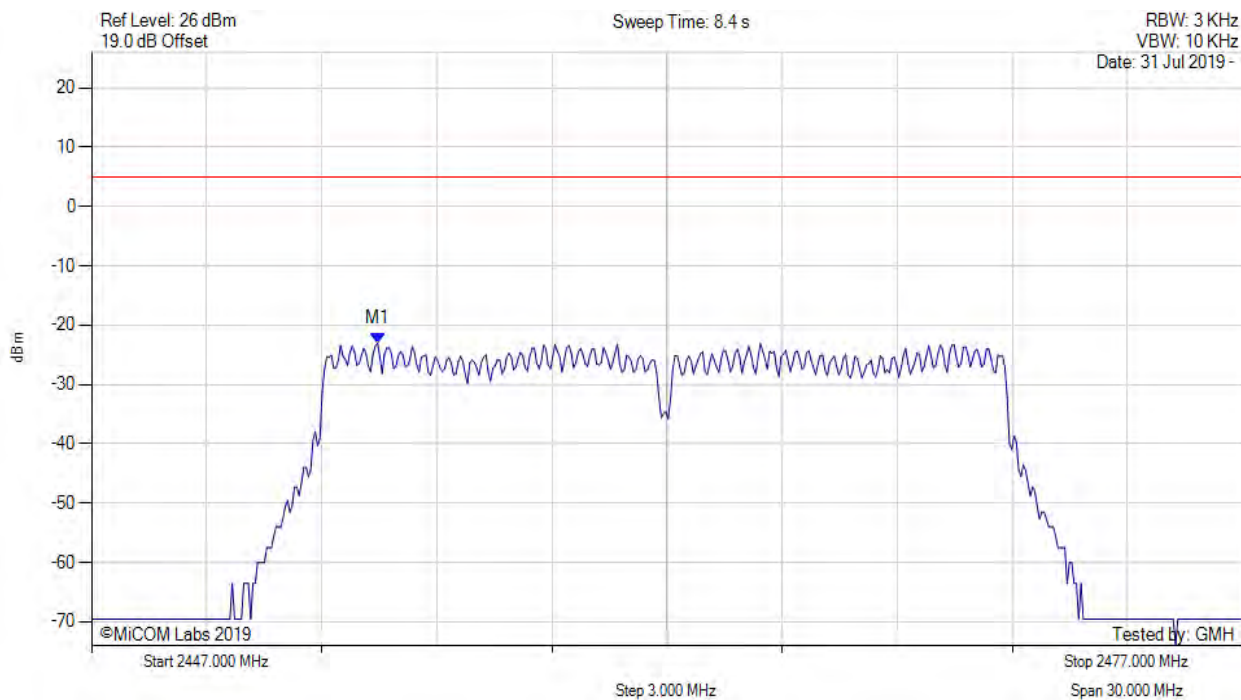


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2454.455 MHz : -23.039 dBm | Limit: ≤ 4.990 dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

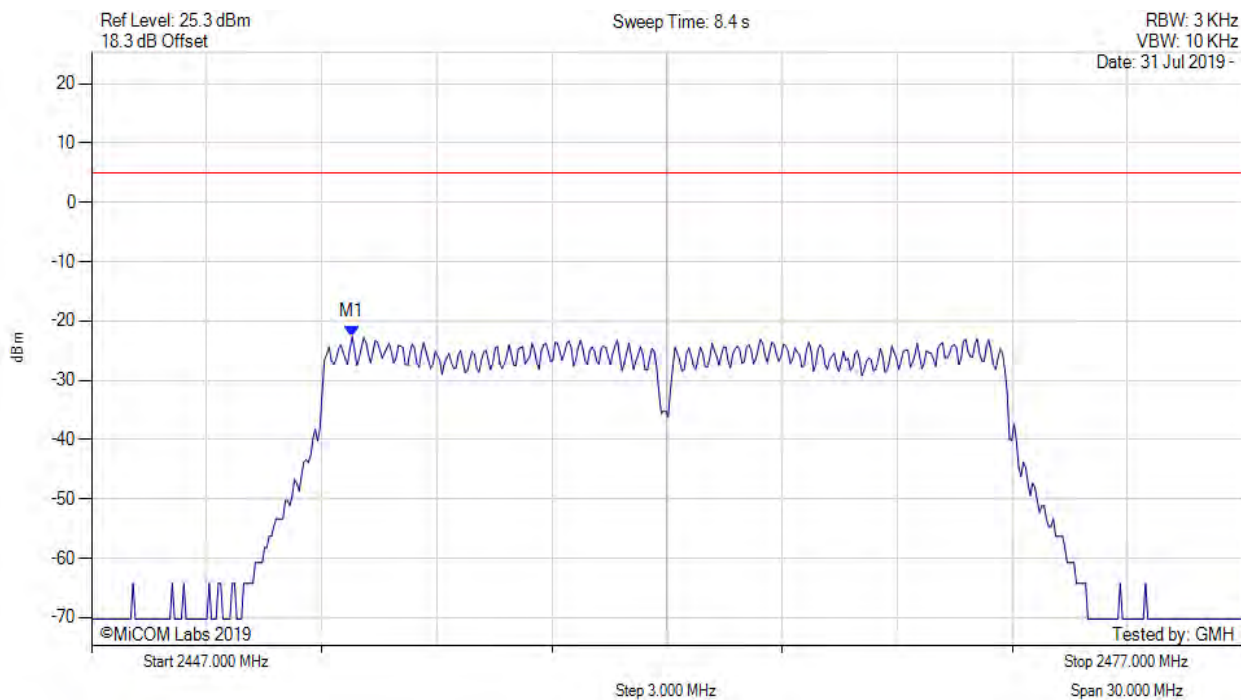


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2453.794 MHz : -22.661 dBm | Limit: ≤ 4.990 dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-20, Channel: 2462.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

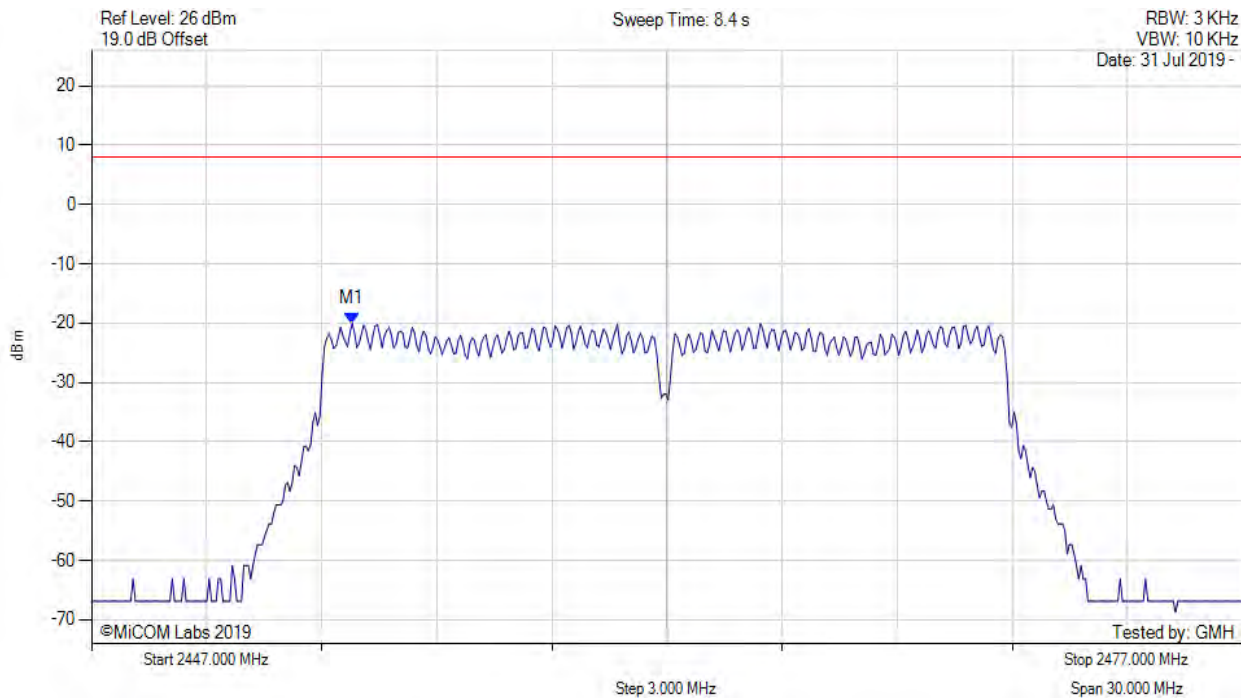


| Analyzer Setup   | Marker:Frequency:Amplitude   | Test Results                              |
|--|--|---|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2453.800 MHz : -20.070 dBm<br>M1 + DCCF : 2453.800 MHz : -19.982 dBm<br>Duty Cycle Correction Factor : +0.09 dB | Limit: $\leq 8.0$ dBm<br>Margin: -28.0 dB |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

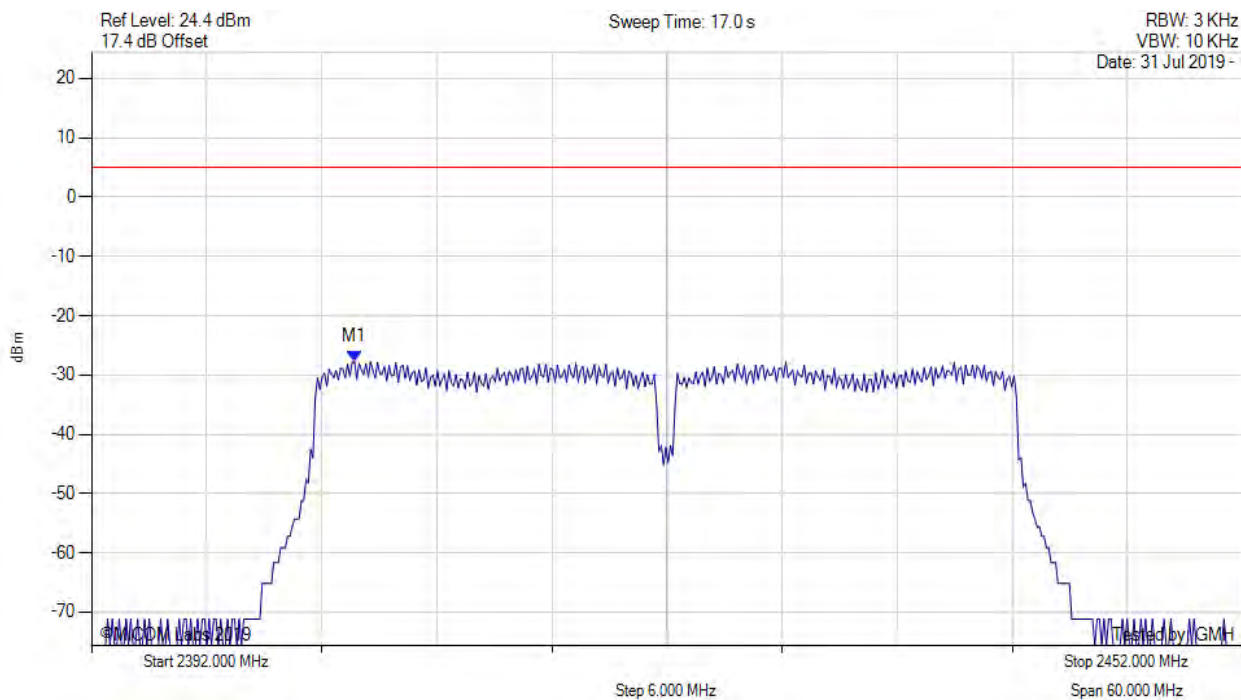

| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2405.707 MHz : -27.702 dBm | Limit: ≤ 4.990 dBm |


[back to matrix](#)



POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

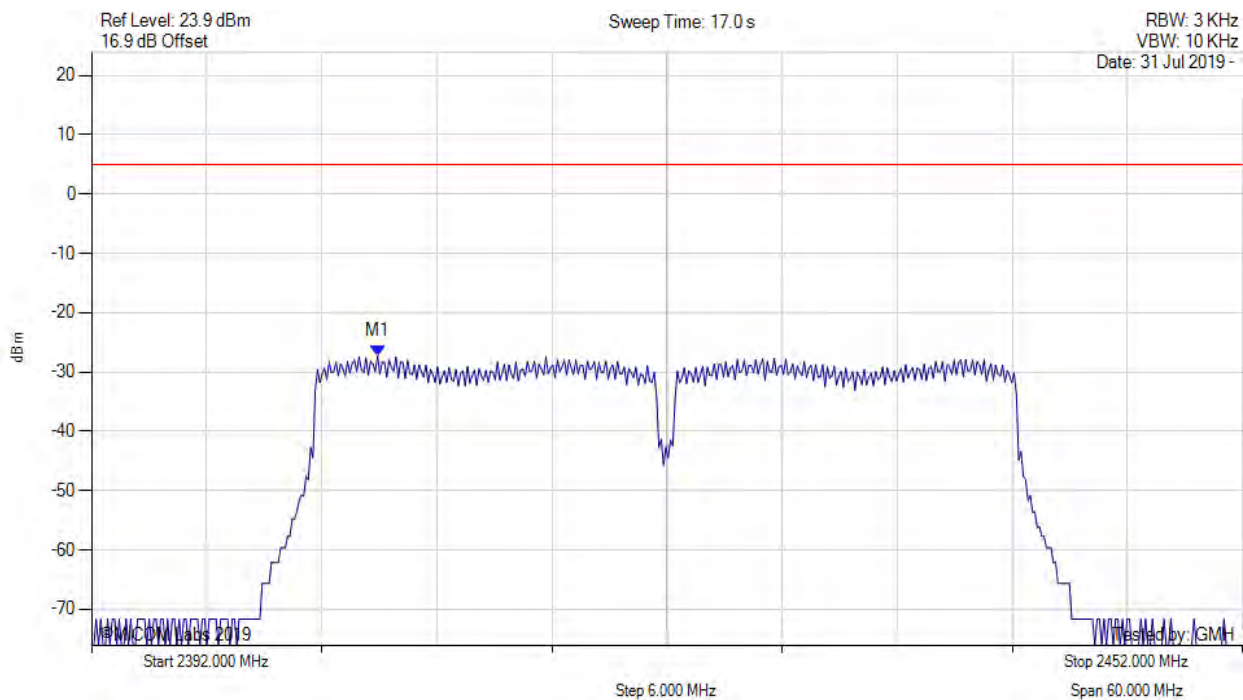


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2406.910 MHz : -27.211 dBm | Limit: ≤ 4.990 dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2422.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

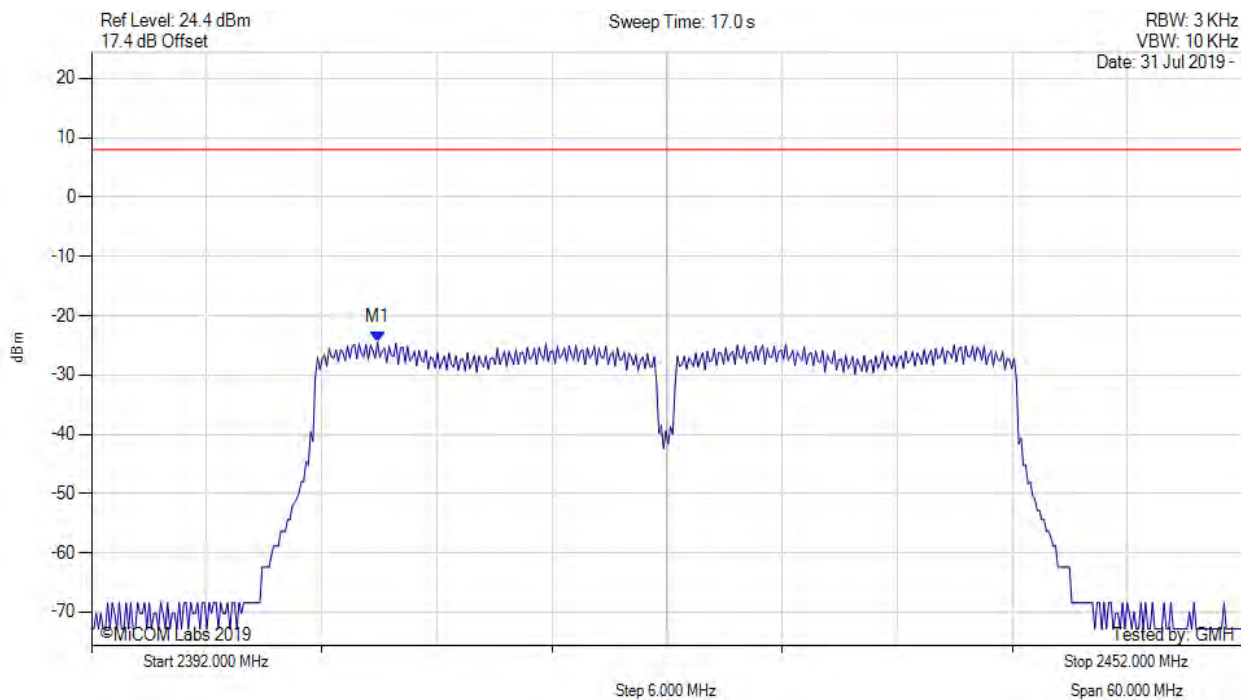


| Analyzer Setup   | Marker:Frequency:Amplitude   | Test Results                              |
|--|--|---|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2406.900 MHz : -24.522 dBm<br>M1 + DCCF : 2406.900 MHz : -24.434 dBm<br>Duty Cycle Correction Factor : +0.09 dB | Limit: $\leq 8.0$ dBm<br>Margin: -32.4 dB |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

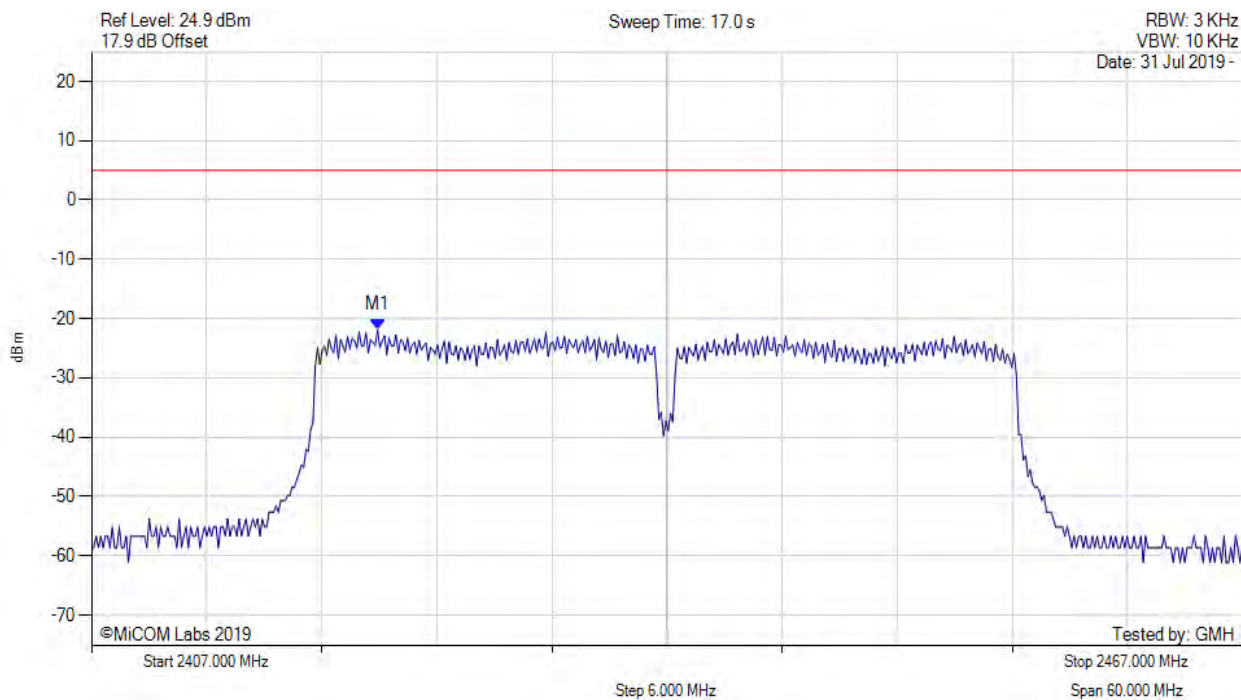


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2421.910 MHz : -21.879 dBm | Limit: ≤ 4.990 dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

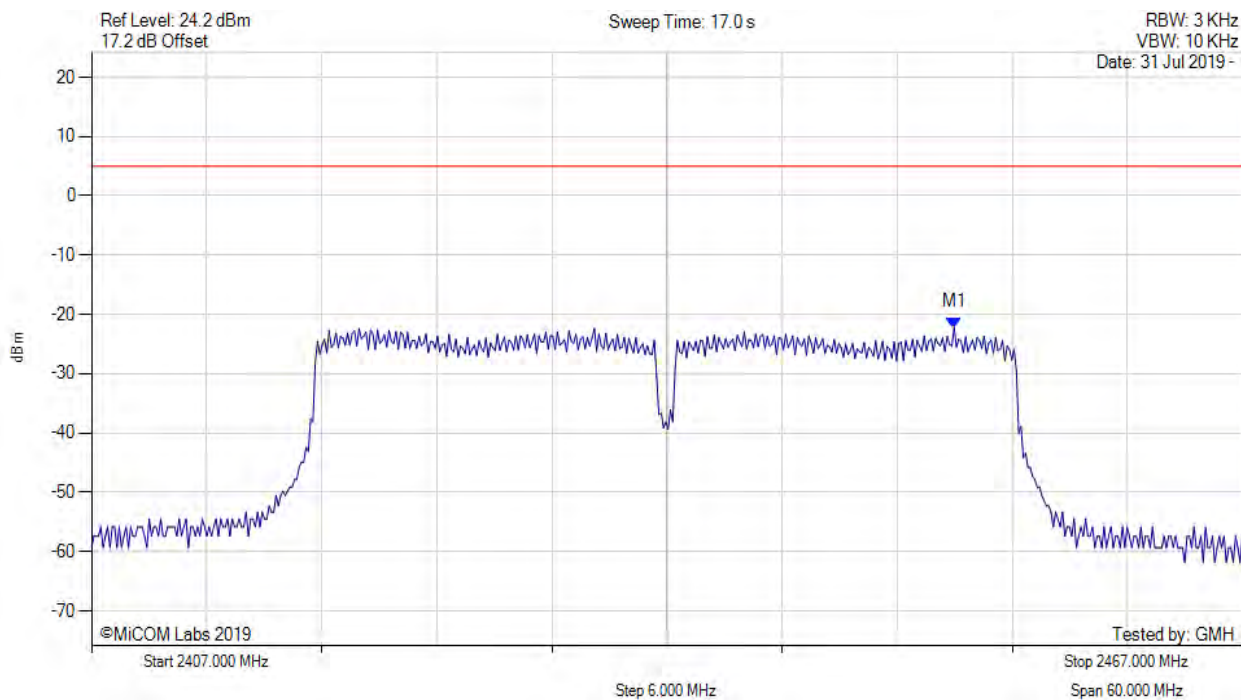


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2451.970 MHz : -22.208 dBm | Limit: ≤ 4.990 dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2437.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

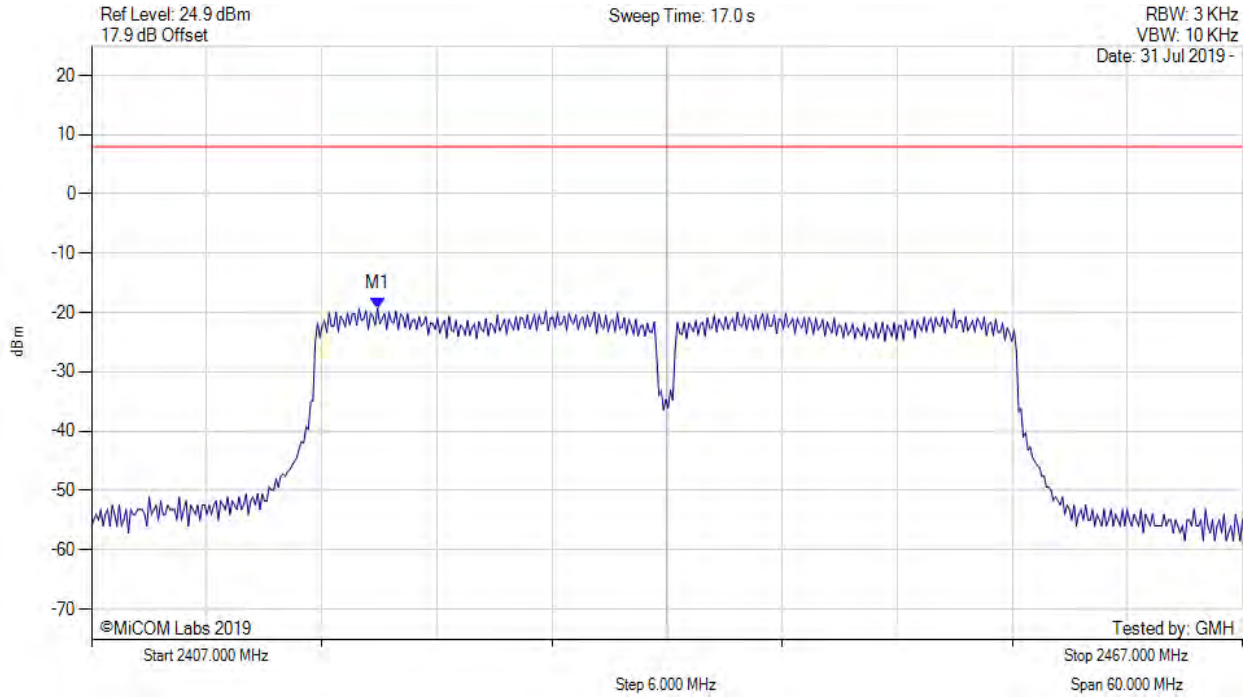


| Analyzer Setup   | Marker:Frequency:Amplitude   | Test Results                              |
|--|--|---|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2421.900 MHz : -19.233 dBm<br>M1 + DCCF : 2421.900 MHz : -19.145 dBm<br>Duty Cycle Correction Factor : +0.09 dB | Limit: $\leq 8.0$ dBm<br>Margin: -27.2 dB |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

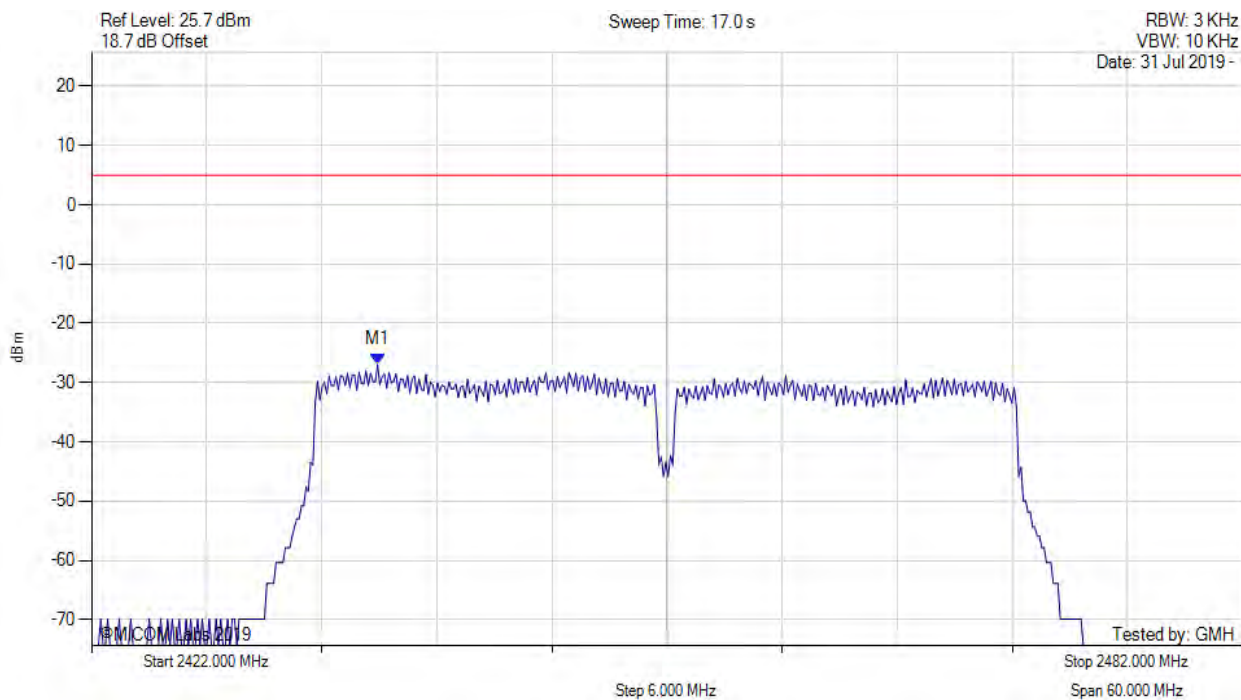


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2436.910 MHz : -26.943 dBm | Limit: ≤ 4.990 dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

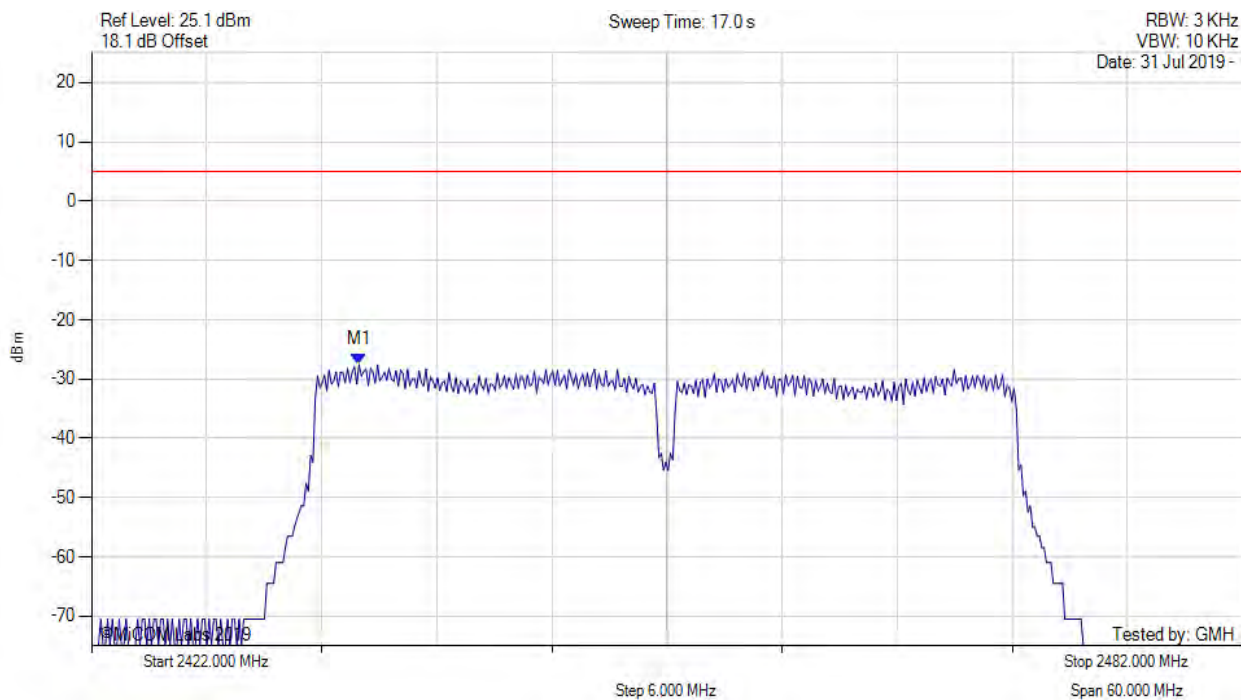


| Analyzer Setup   | Marker:Frequency:Amplitude      | Test Results       |
|--|---------------------------------|--------------------|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2435.948 MHz : -27.543 dBm | Limit: ≤ 4.990 dBm |

[back to matrix](#)

POWER SPECTRAL DENSITY - AVERAGE



Variant: 802.11n HT-40, Channel: 2452.00 MHz, SUM, Temp: 20, Voltage: 55 Vdc

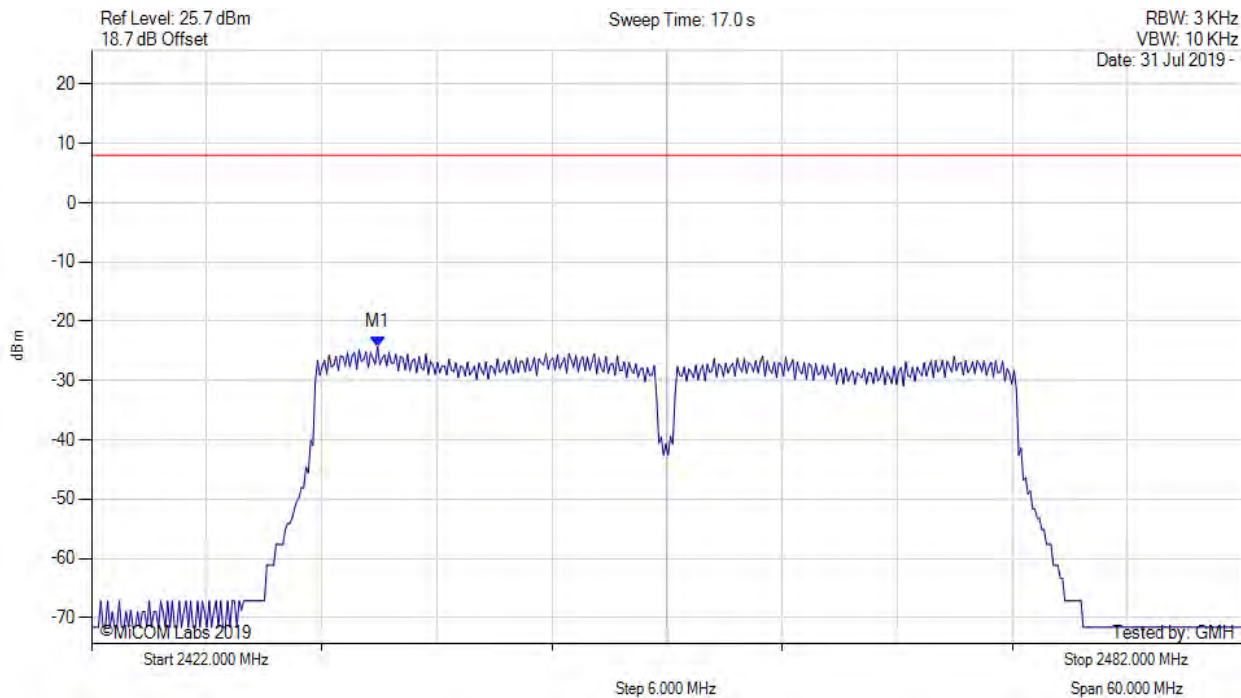

| Analyzer Setup   | Marker:Frequency:Amplitude   | Test Results                              |
|--|--|---|
| Detector = AVERAGE<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2436.900 MHz : -24.251 dBm<br>M1 + DCCF : 2436.900 MHz : -24.163 dBm<br>Duty Cycle Correction Factor : +0.09 dB | Limit: $\leq 8.0$ dBm<br>Margin: -32.2 dB |


[back to matrix](#)



### A.3. Emissions

#### A.3.1. Conducted Emissions

##### A.3.1.1. Conducted Spurious Emissions

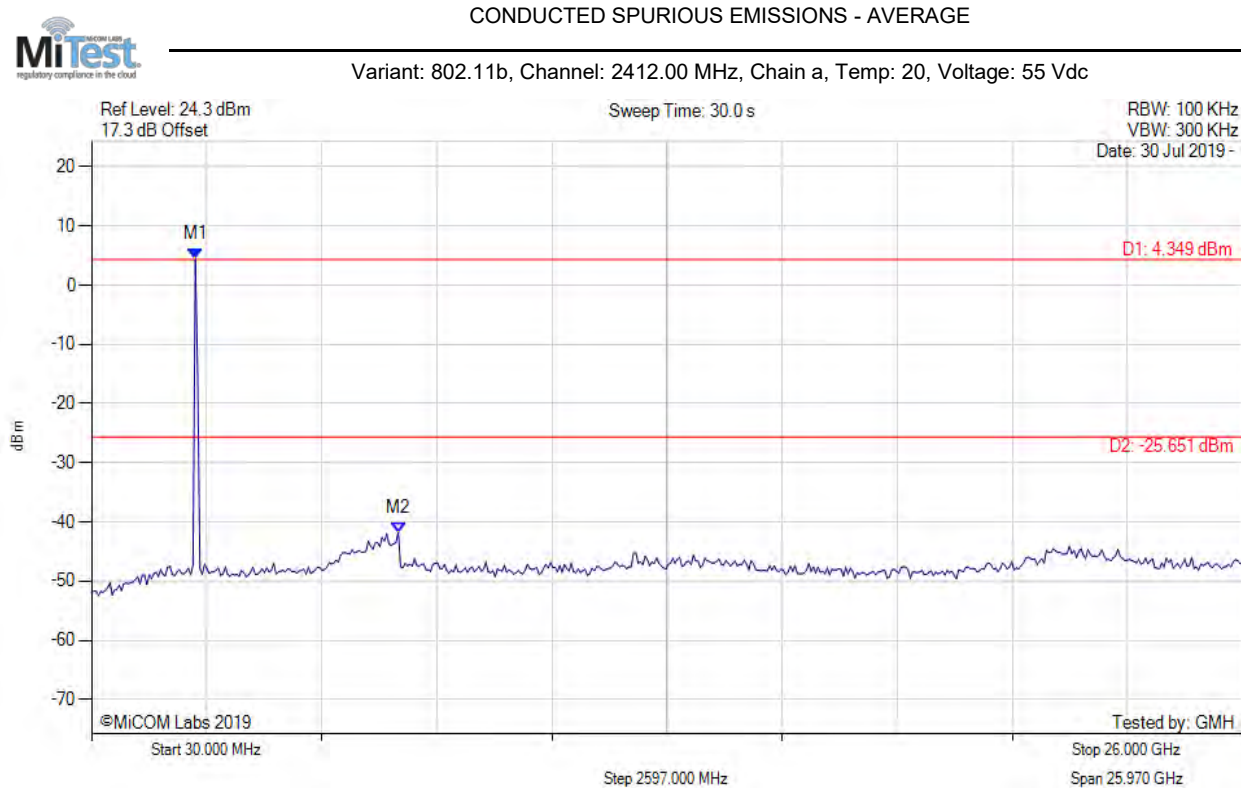


| Analyzer Setup  | Marker:Frequency:Amplitude                                       | Test Results                           |
|---|--|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2371.984 MHz : 4.349 dBm<br>M2 : 6951.864 MHz : -41.768 dBm | Limit: -25.65 dBm<br>Margin: -16.12 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

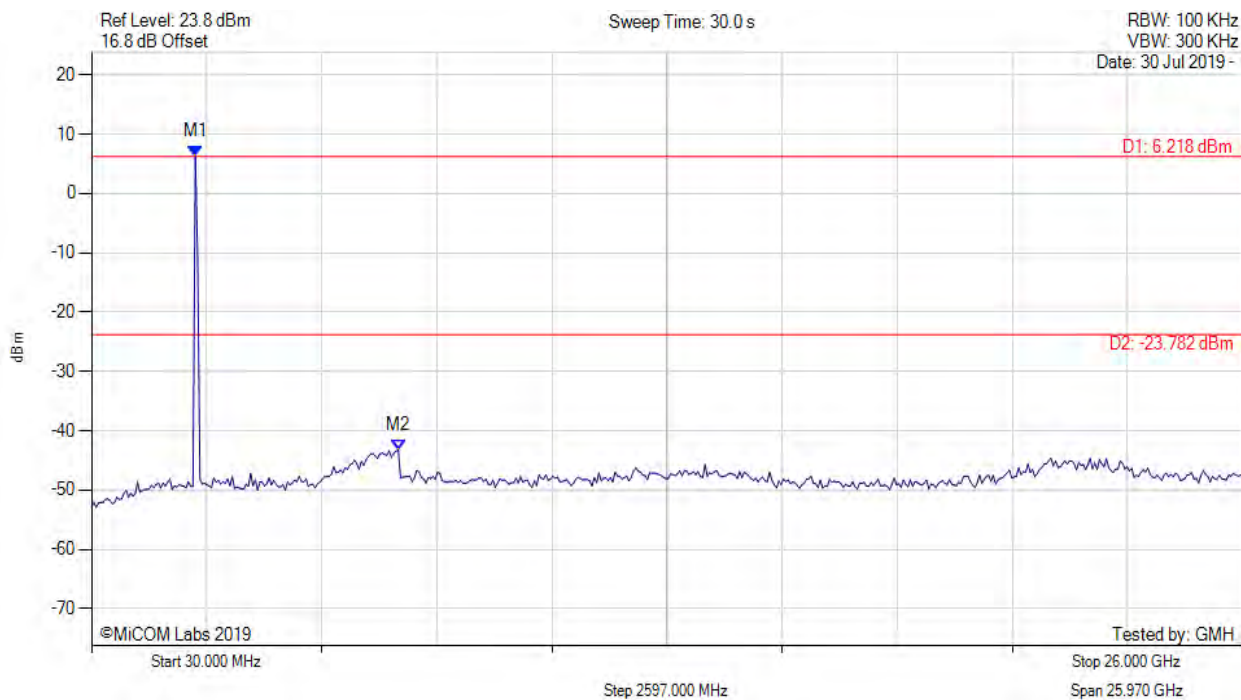


| Analyzer Setup  | Marker:Frequency:Amplitude                                       | Test Results                           |
|---|--|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2371.984 MHz : 6.218 dBm<br>M2 : 6951.864 MHz : -43.267 dBm | Limit: -23.78 dBm<br>Margin: -19.49 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

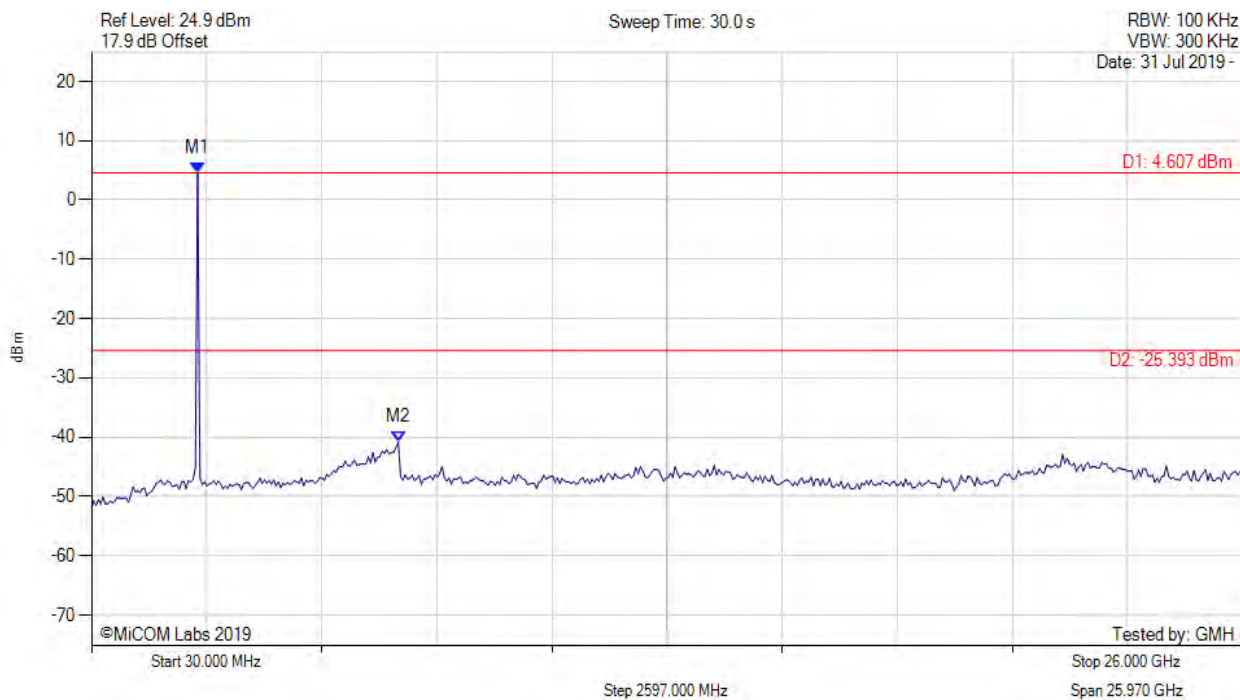


| Analyzer Setup  | Marker:Frequency:Amplitude                                       | Test Results                           |
|---|--|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2424.028 MHz : 4.607 dBm<br>M2 : 6951.864 MHz : -40.776 dBm | Limit: -25.39 dBm<br>Margin: -15.39 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

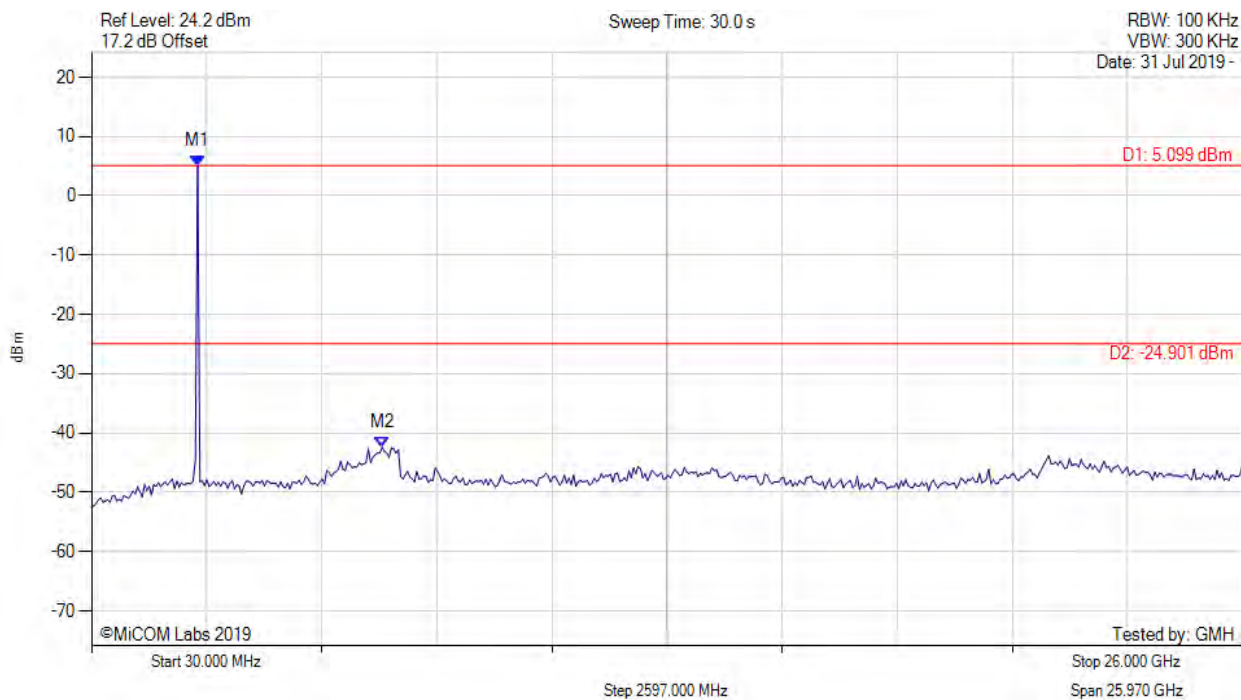


| Analyzer Setup  | Marker:Frequency:Amplitude                                       | Test Results                           |
|---|--|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2424.028 MHz : 5.099 dBm<br>M2 : 6587.555 MHz : -42.426 dBm | Limit: -24.90 dBm<br>Margin: -17.53 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

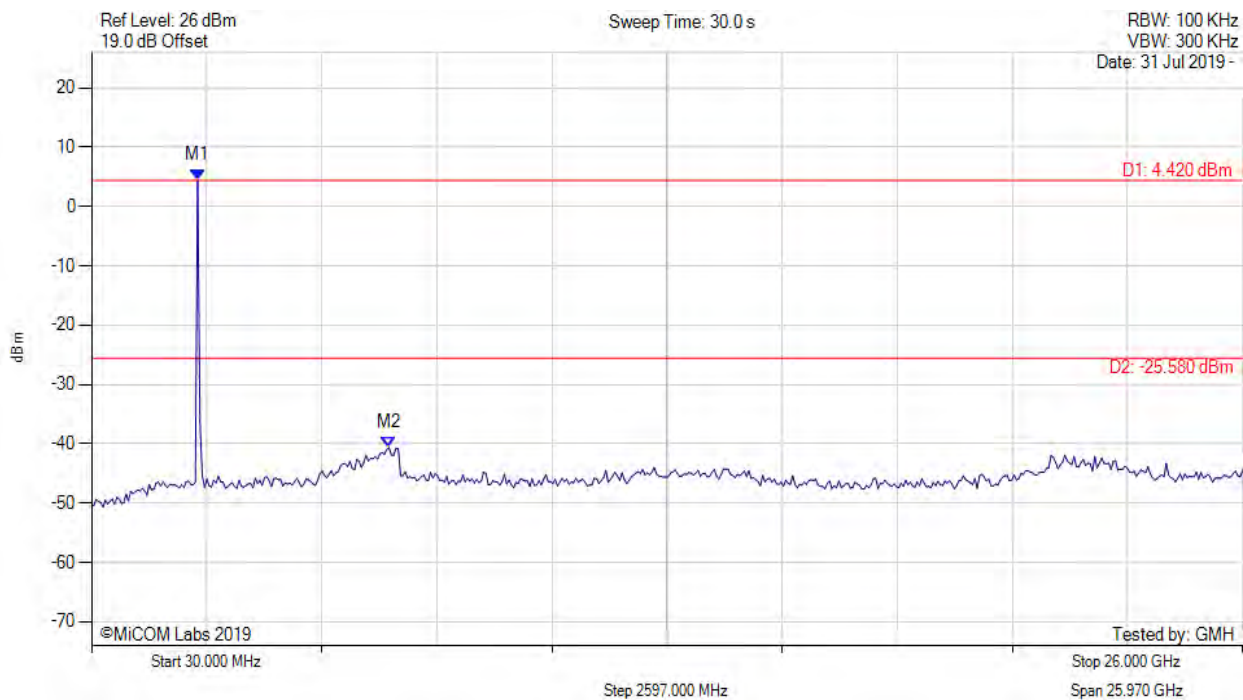


| Analyzer Setup  | Marker:Frequency:Amplitude                                       | Test Results                           |
|---|--|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2424.028 MHz : 4.420 dBm<br>M2 : 6743.687 MHz : -40.660 dBm | Limit: -25.58 dBm<br>Margin: -15.08 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

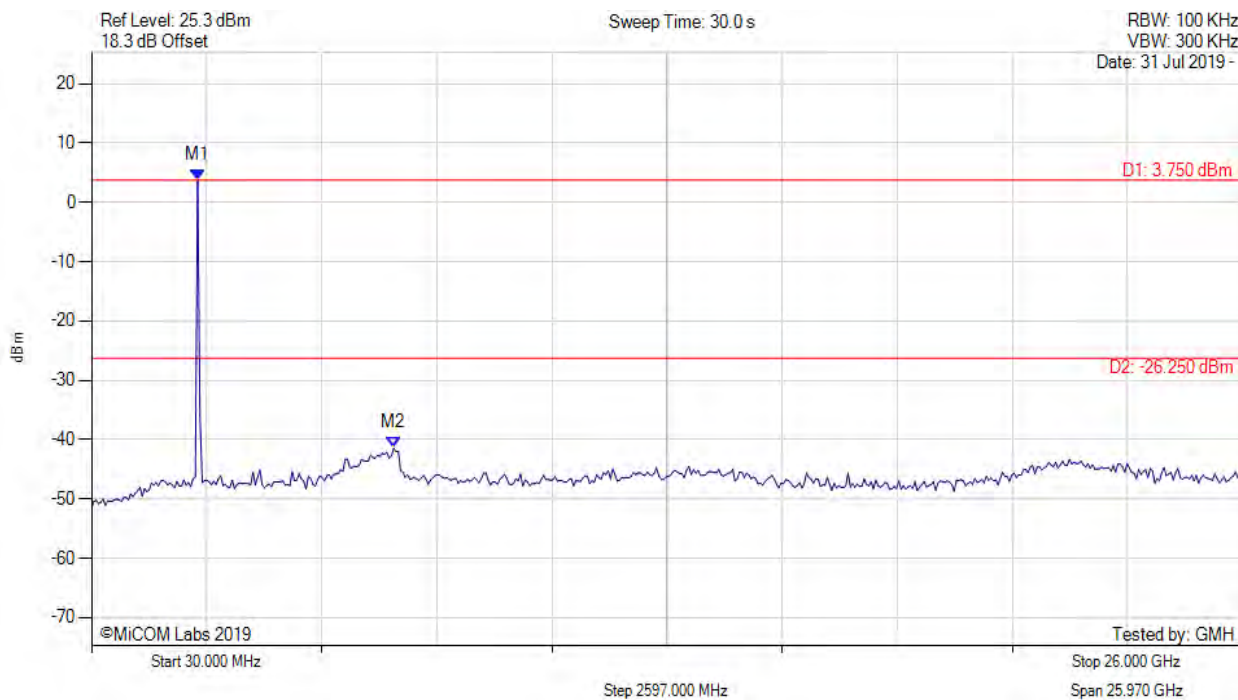


| Analyzer Setup  | Marker:Frequency:Amplitude                                       | Test Results                           |
|---|--|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2424.028 MHz : 3.750 dBm<br>M2 : 6847.776 MHz : -41.425 dBm | Limit: -26.25 dBm<br>Margin: -15.17 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2412.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

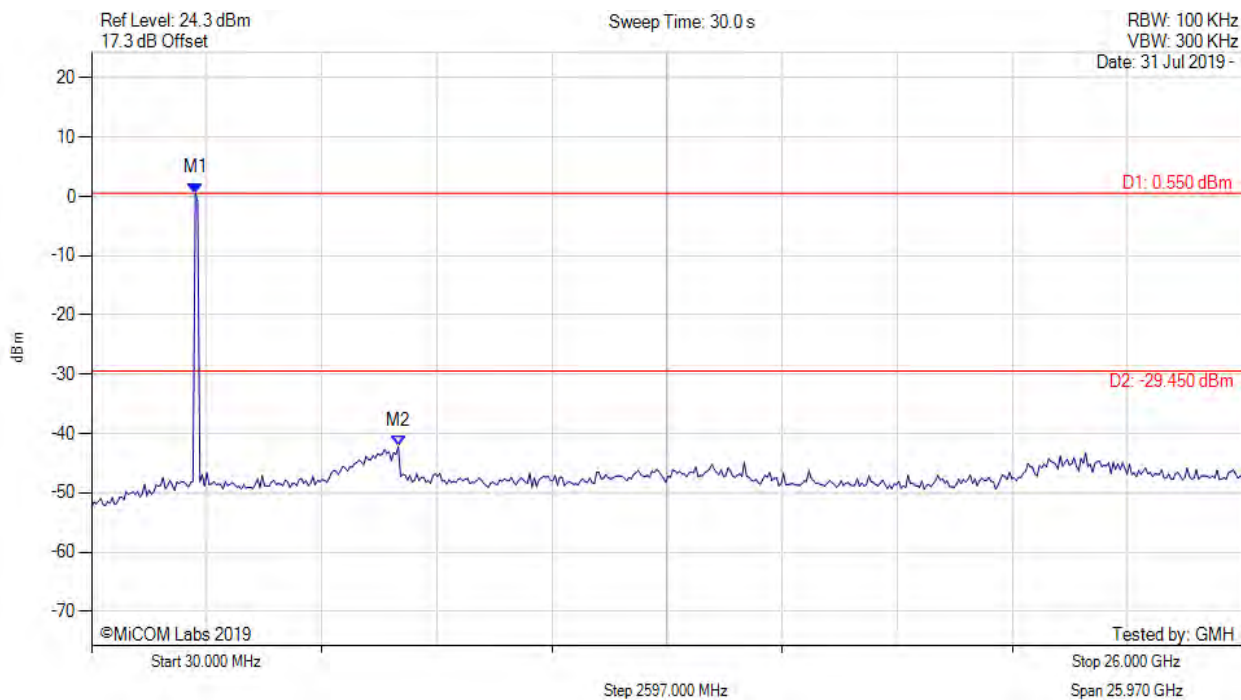


| Analyzer Setup  | Marker:Frequency:Amplitude                                       | Test Results                           |
|---|--|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2371.984 MHz : 0.550 dBm<br>M2 : 6951.864 MHz : -42.167 dBm | Limit: -29.45 dBm<br>Margin: -12.72 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

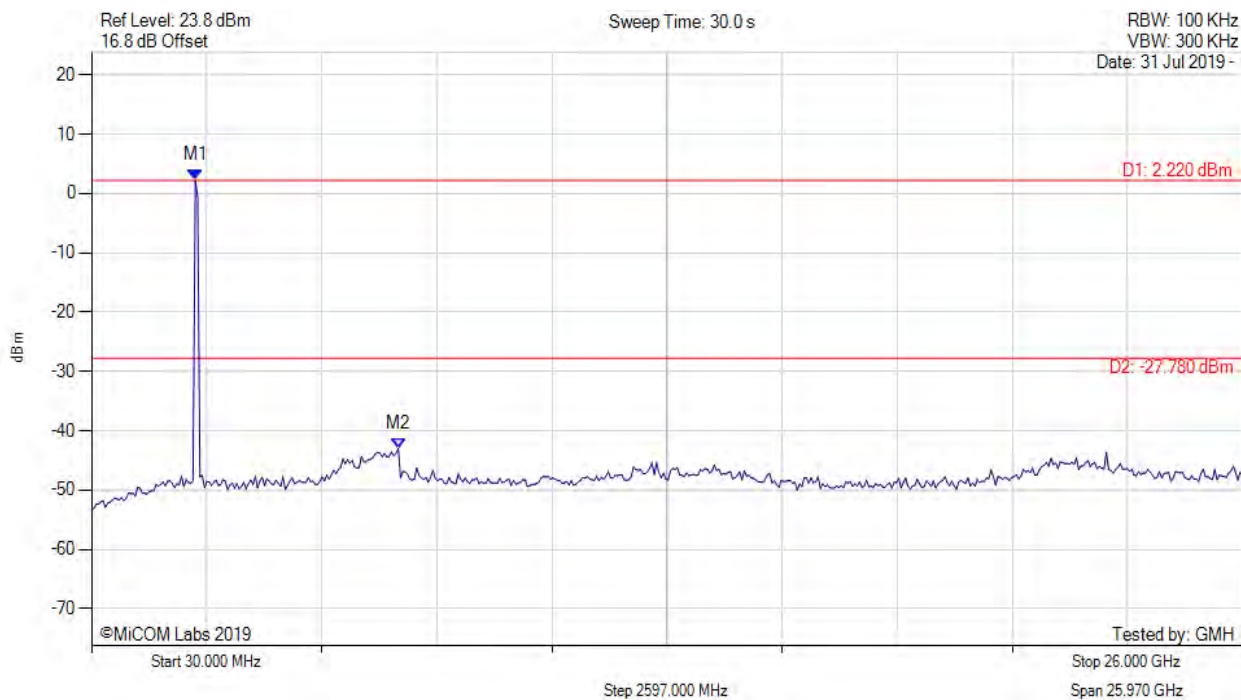

| Analyzer Setup  | Marker:Frequency:Amplitude                                       | Test Results                           |
|---|--|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2371.984 MHz : 2.220 dBm<br>M2 : 6951.864 MHz : -43.035 dBm | Limit: -27.78 dBm<br>Margin: -15.25 dB |


[back to matrix](#)



CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

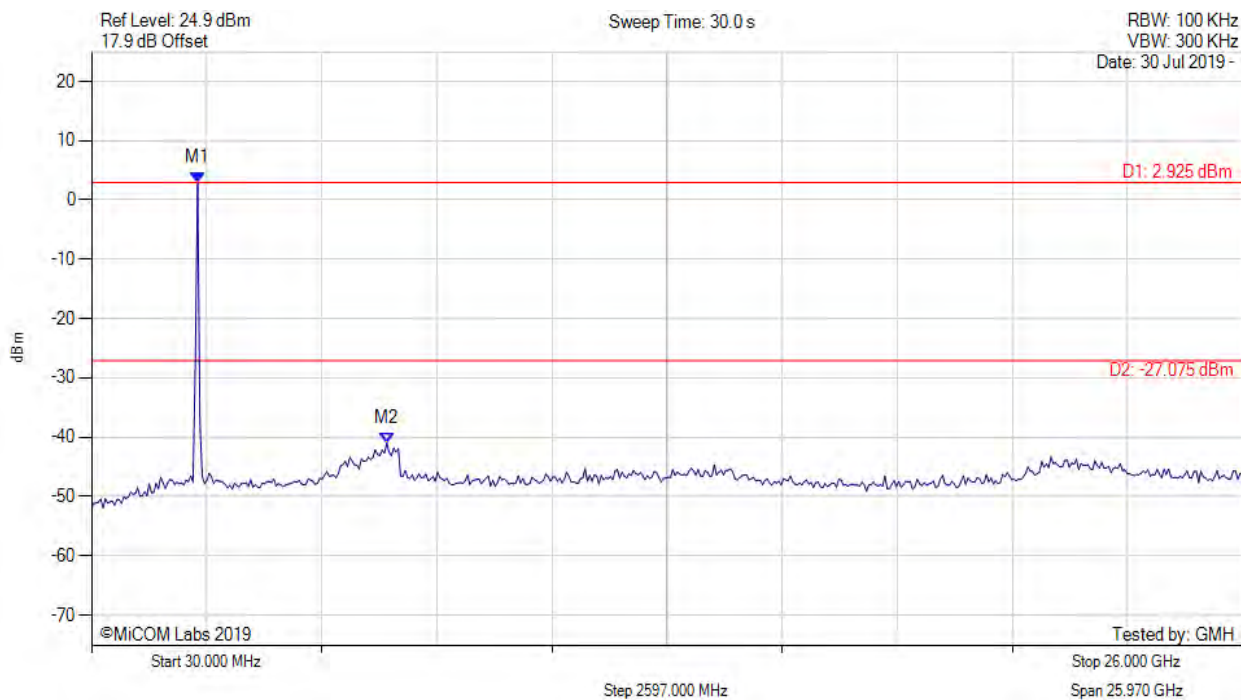


| Analyzer Setup  | Marker:Frequency:Amplitude                                       | Test Results                           |
|---|--|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2424.028 MHz : 2.925 dBm<br>M2 : 6691.643 MHz : -40.969 dBm | Limit: -27.08 dBm<br>Margin: -13.89 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

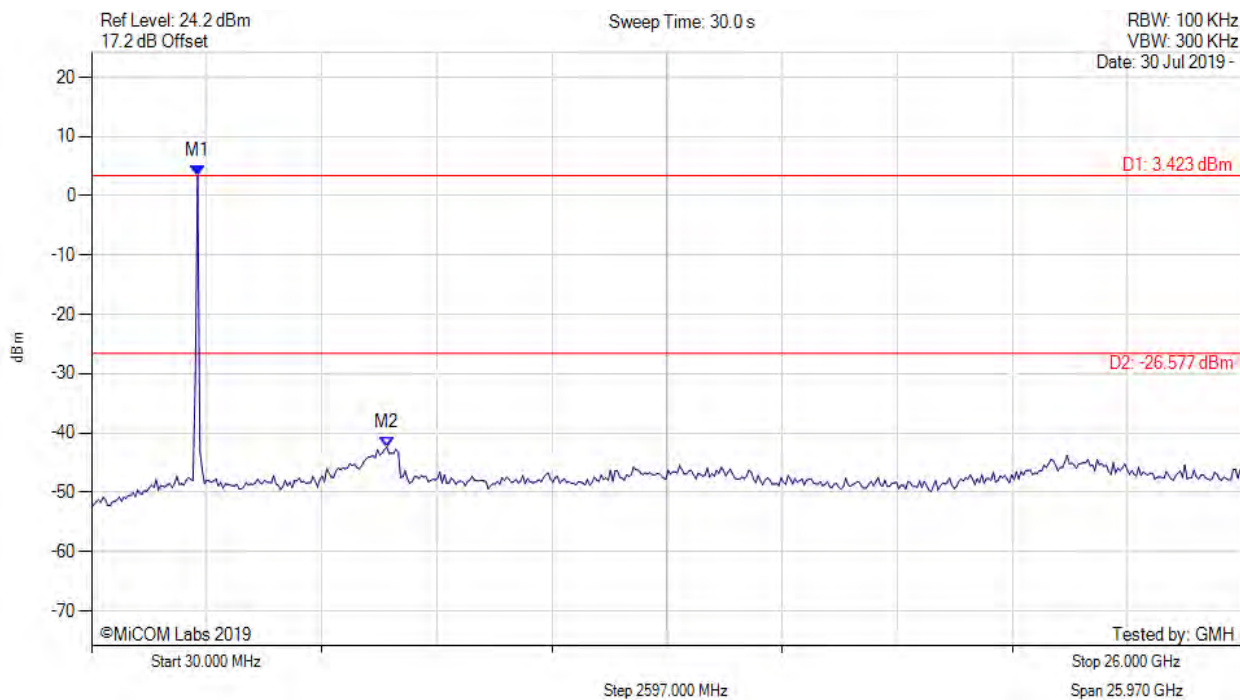


| Analyzer Setup  | Marker:Frequency:Amplitude                                       | Test Results                           |
|---|--|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2424.028 MHz : 3.423 dBm<br>M2 : 6691.643 MHz : -42.365 dBm | Limit: -26.58 dBm<br>Margin: -15.79 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

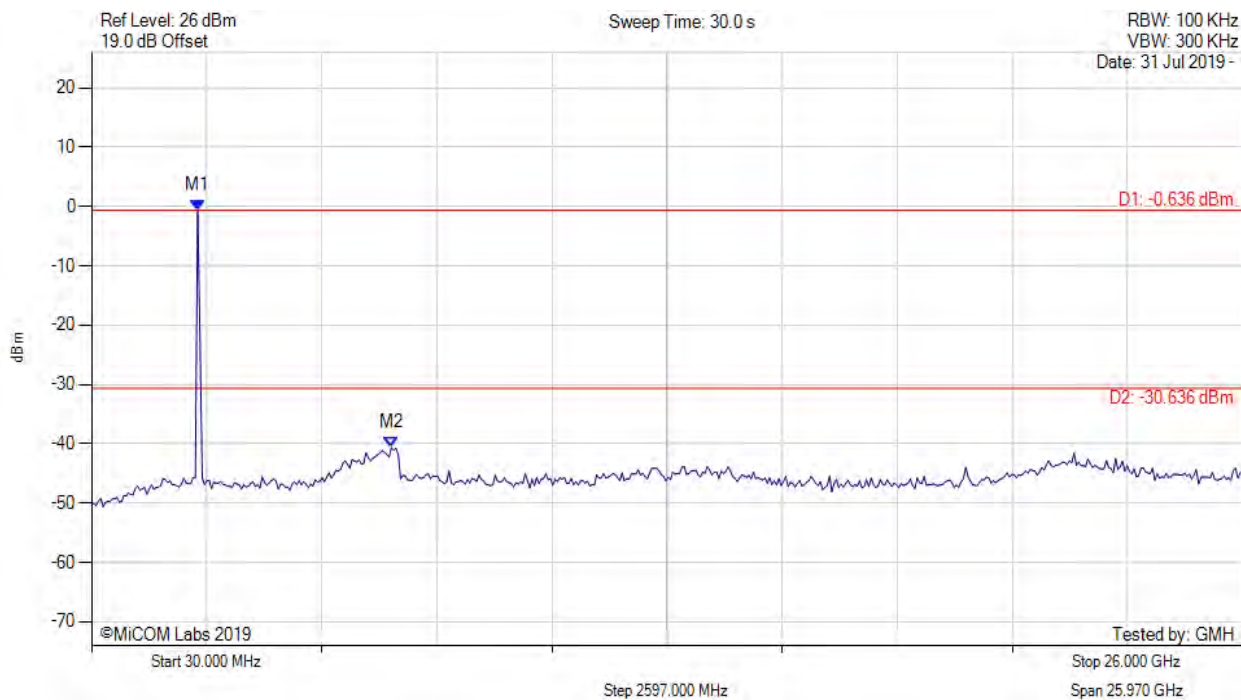


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results                           |
|---|---|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2424.028 MHz : -0.636 dBm<br>M2 : 6795.731 MHz : -40.670 dBm | Limit: -30.64 dBm<br>Margin: -10.03 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

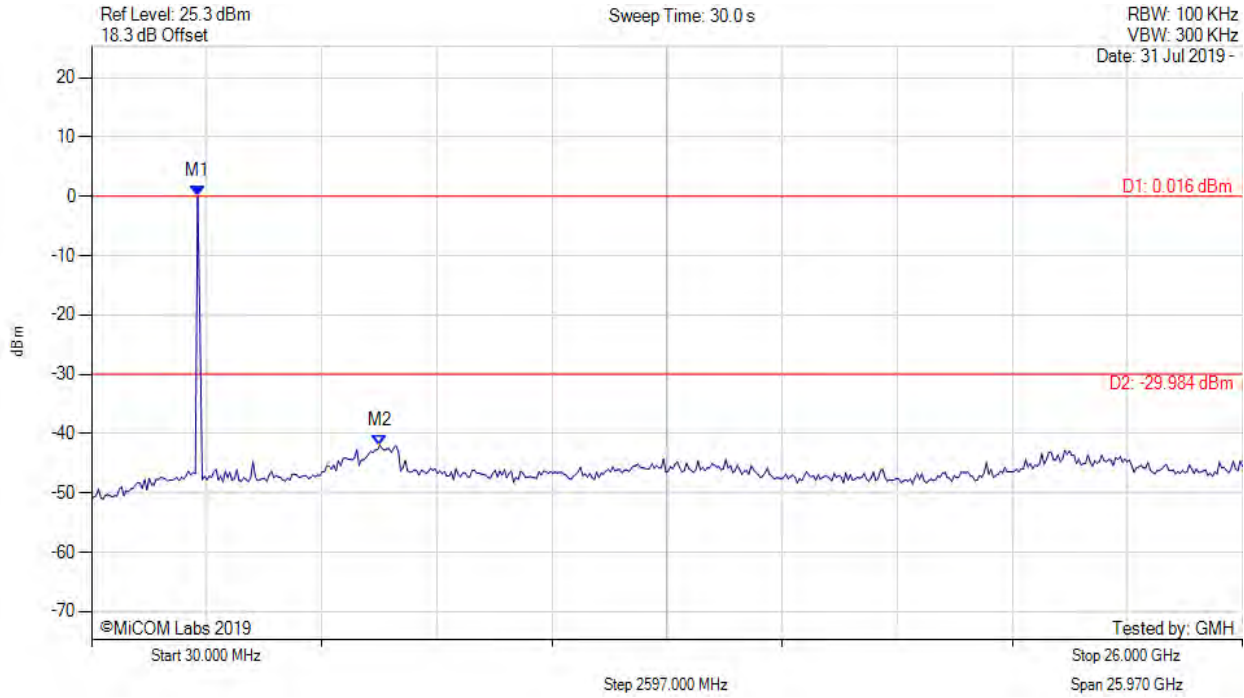


| Analyzer Setup  | Marker:Frequency:Amplitude                                       | Test Results                           |
|---|--|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2424.028 MHz : 0.016 dBm<br>M2 : 6535.511 MHz : -41.952 dBm | Limit: -29.98 dBm<br>Margin: -11.97 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

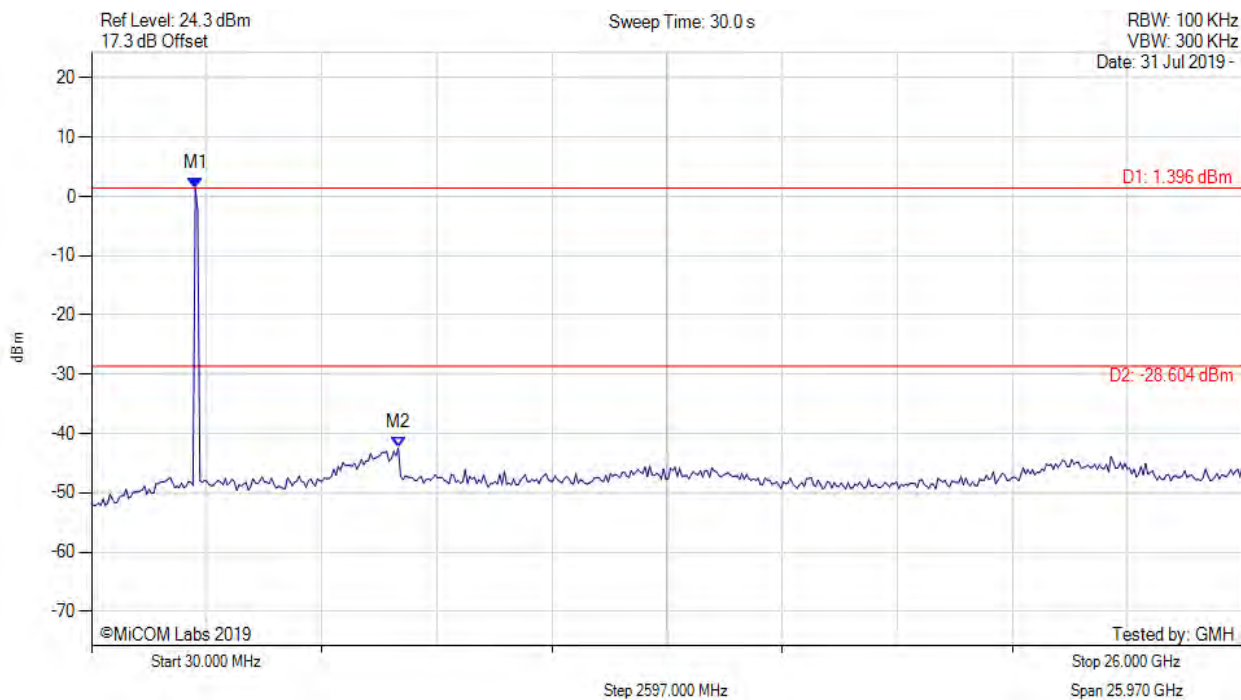


| Analyzer Setup  | Marker:Frequency:Amplitude                                       | Test Results                           |
|---|--|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2371.984 MHz : 1.396 dBm<br>M2 : 6951.864 MHz : -42.395 dBm | Limit: -28.60 dBm<br>Margin: -13.80 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

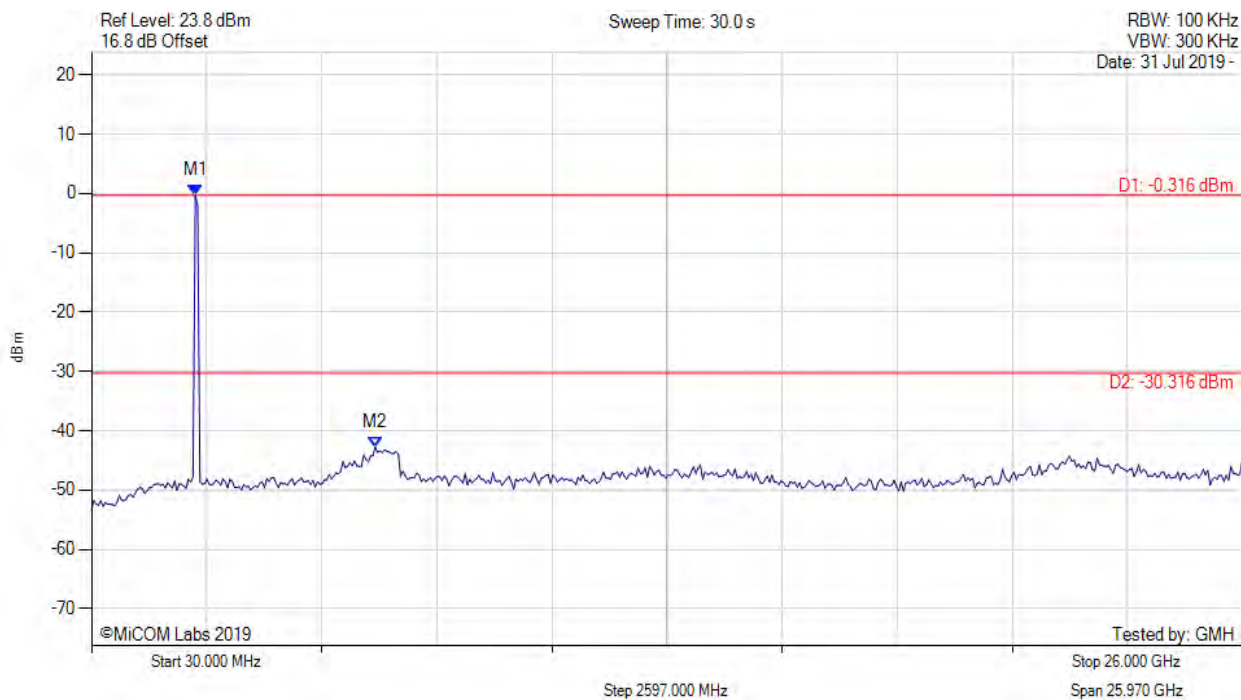


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results                           |
|---|---|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2371.984 MHz : -0.316 dBm<br>M2 : 6431.423 MHz : -42.795 dBm | Limit: -30.32 dBm<br>Margin: -12.48 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

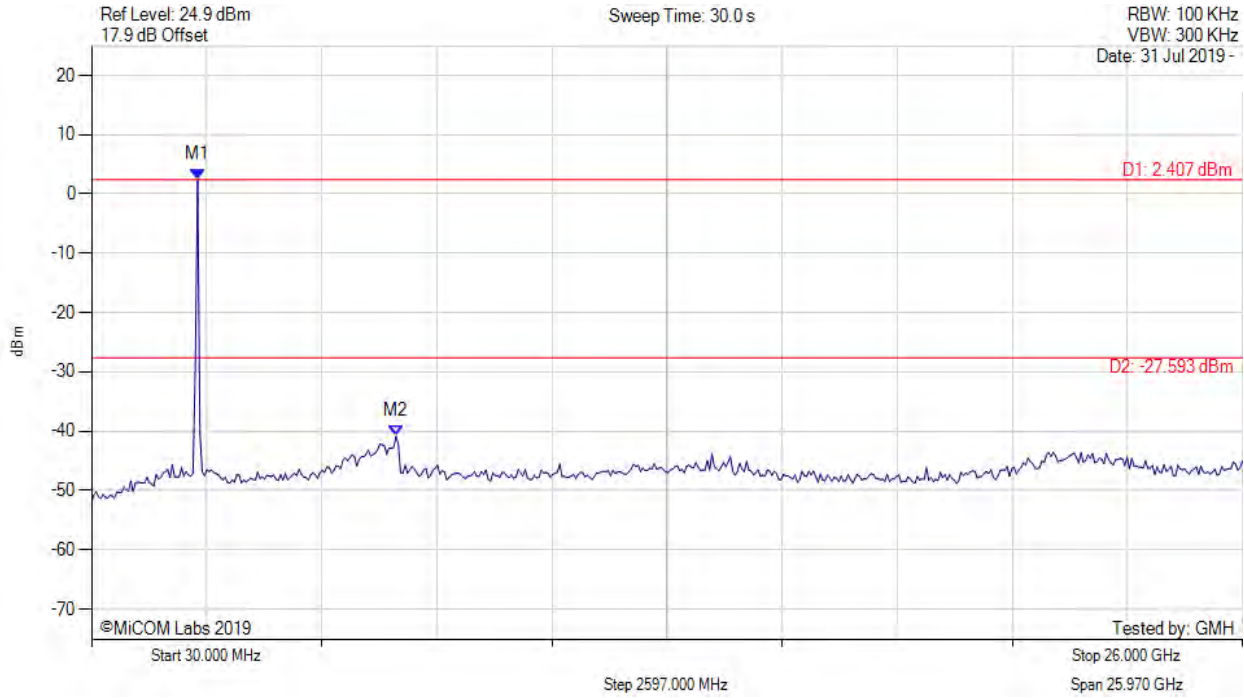


| Analyzer Setup  | Marker:Frequency:Amplitude                                       | Test Results                           |
|---|--|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2424.028 MHz : 2.407 dBm<br>M2 : 6899.820 MHz : -40.863 dBm | Limit: -27.59 dBm<br>Margin: -13.27 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

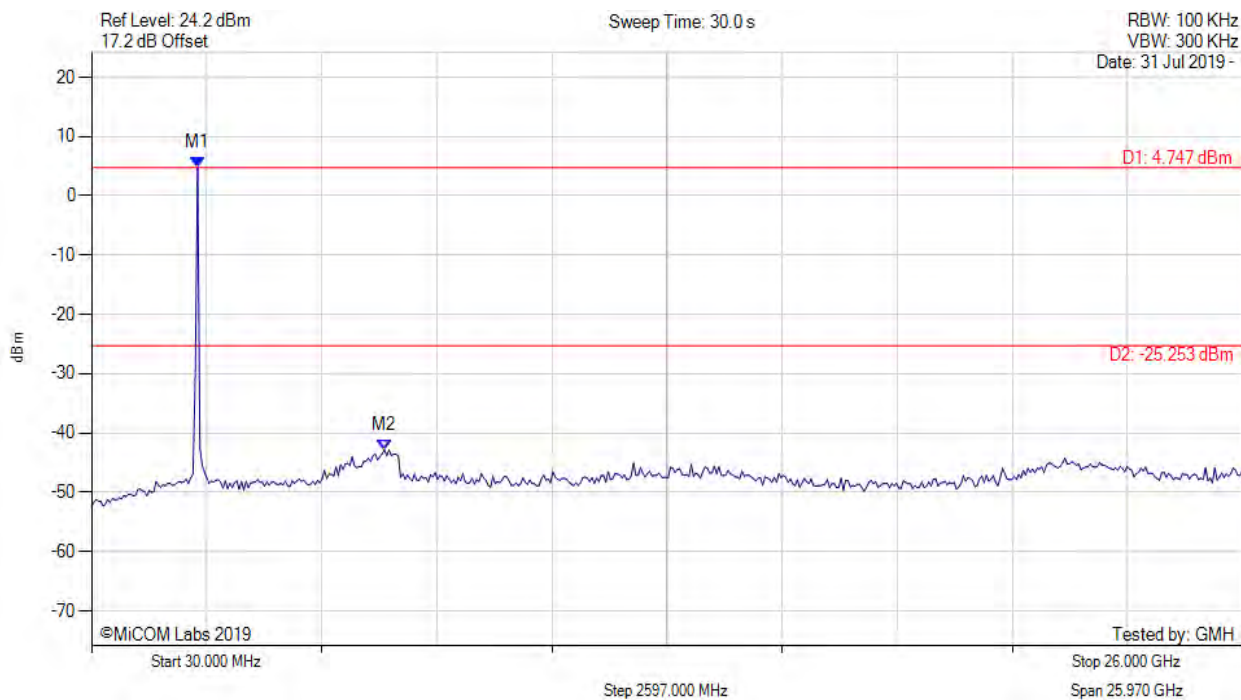

| Analyzer Setup  | Marker:Frequency:Amplitude                                       | Test Results                           |
|---|--|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2424.028 MHz : 4.747 dBm<br>M2 : 6639.599 MHz : -42.865 dBm | Limit: -25.25 dBm<br>Margin: -17.62 dB |


[back to matrix](#)



CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

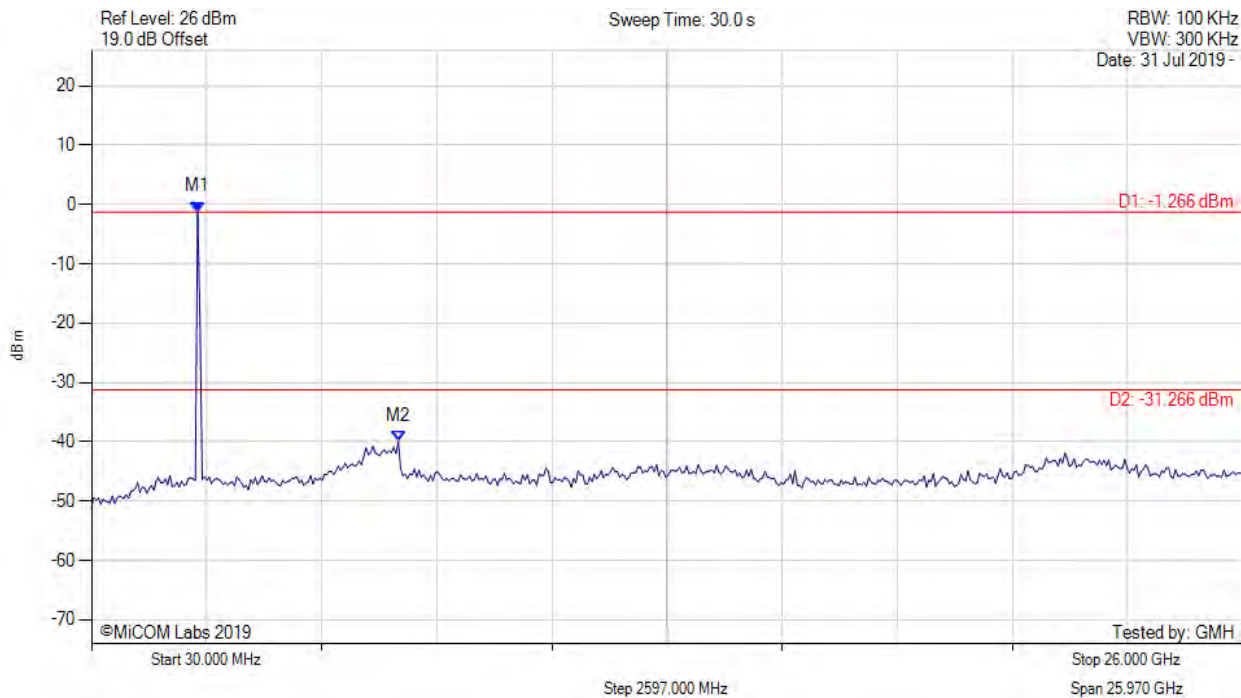


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results                          |
|---|---|---------------------------------------|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2424.028 MHz : -1.266 dBm<br>M2 : 6951.864 MHz : -39.967 dBm | Limit: -31.27 dBm<br>Margin: -8.70 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

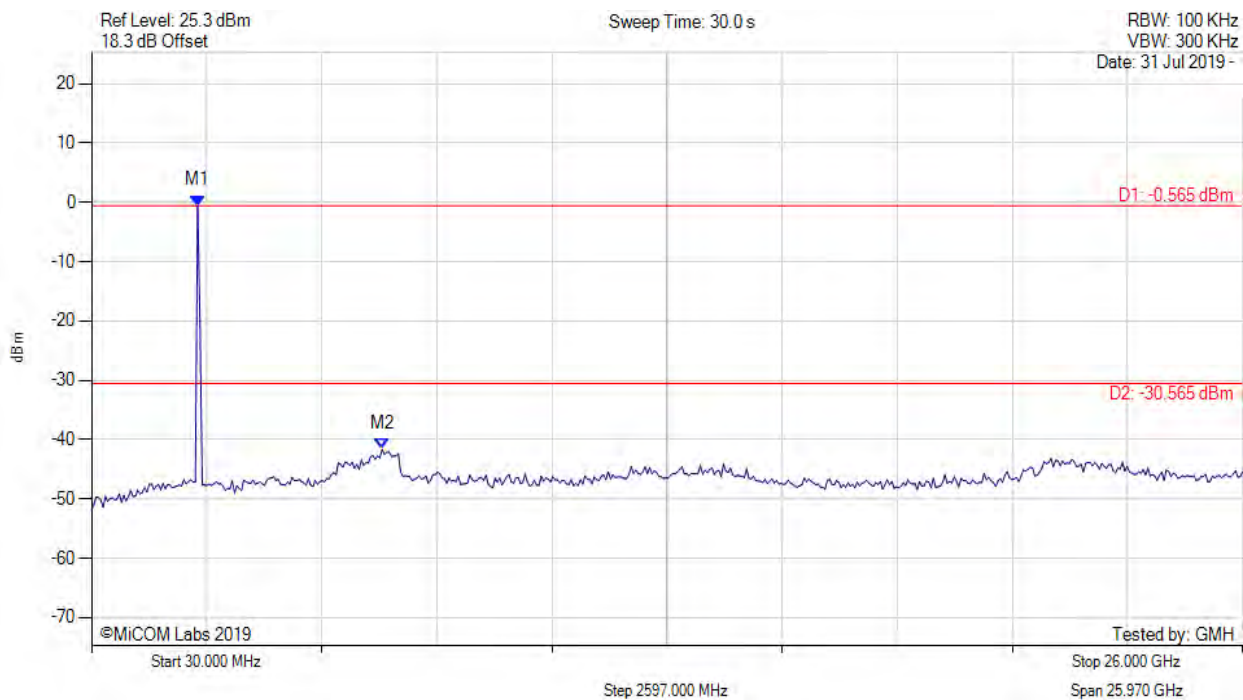


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results                           |
|---|---|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2424.028 MHz : -0.565 dBm<br>M2 : 6587.555 MHz : -41.669 dBm | Limit: -30.57 dBm<br>Margin: -11.10 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

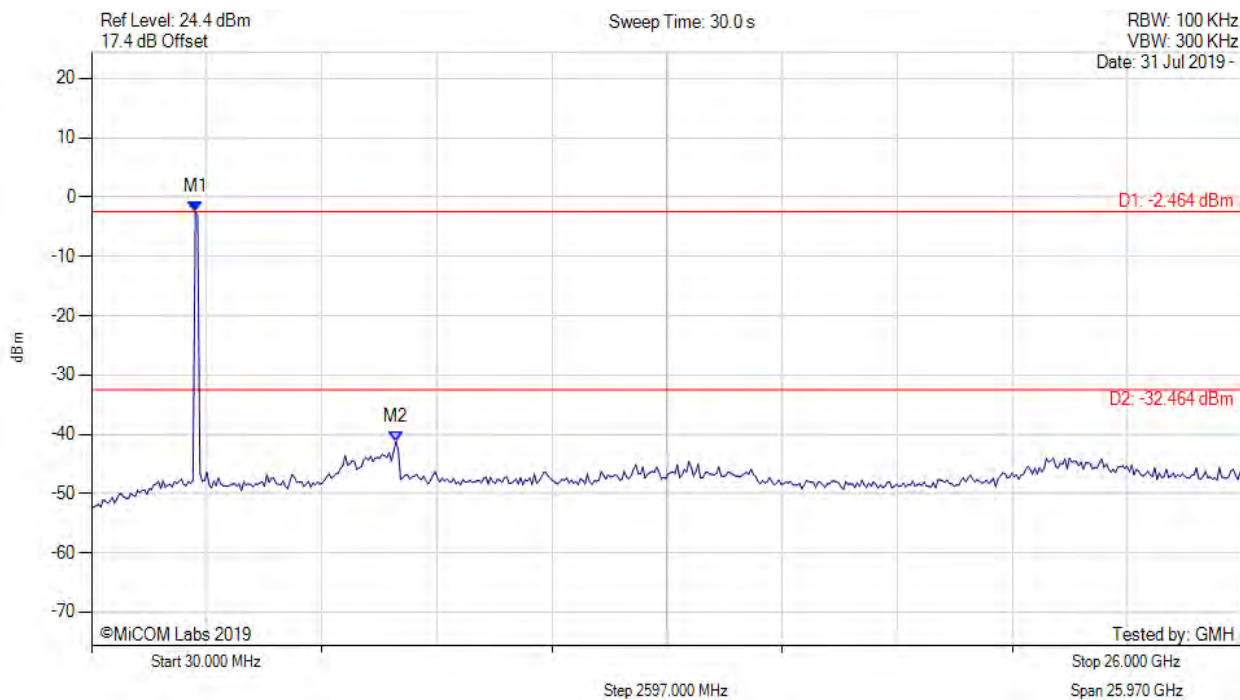


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results                          |
|---|---|---------------------------------------|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2371.984 MHz : -2.464 dBm<br>M2 : 6899.820 MHz : -41.211 dBm | Limit: -32.46 dBm<br>Margin: -8.75 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

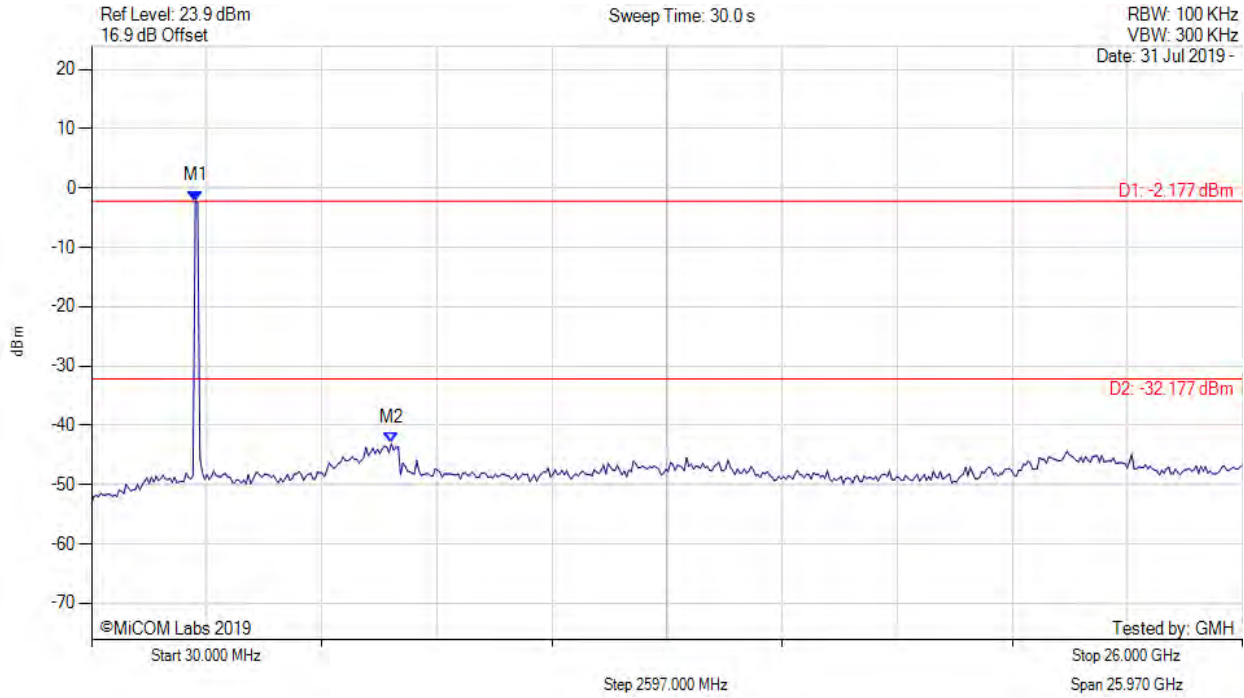


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results                           |
|---|---|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2371.984 MHz : -2.177 dBm<br>M2 : 6795.731 MHz : -43.067 dBm | Limit: -32.18 dBm<br>Margin: -10.89 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

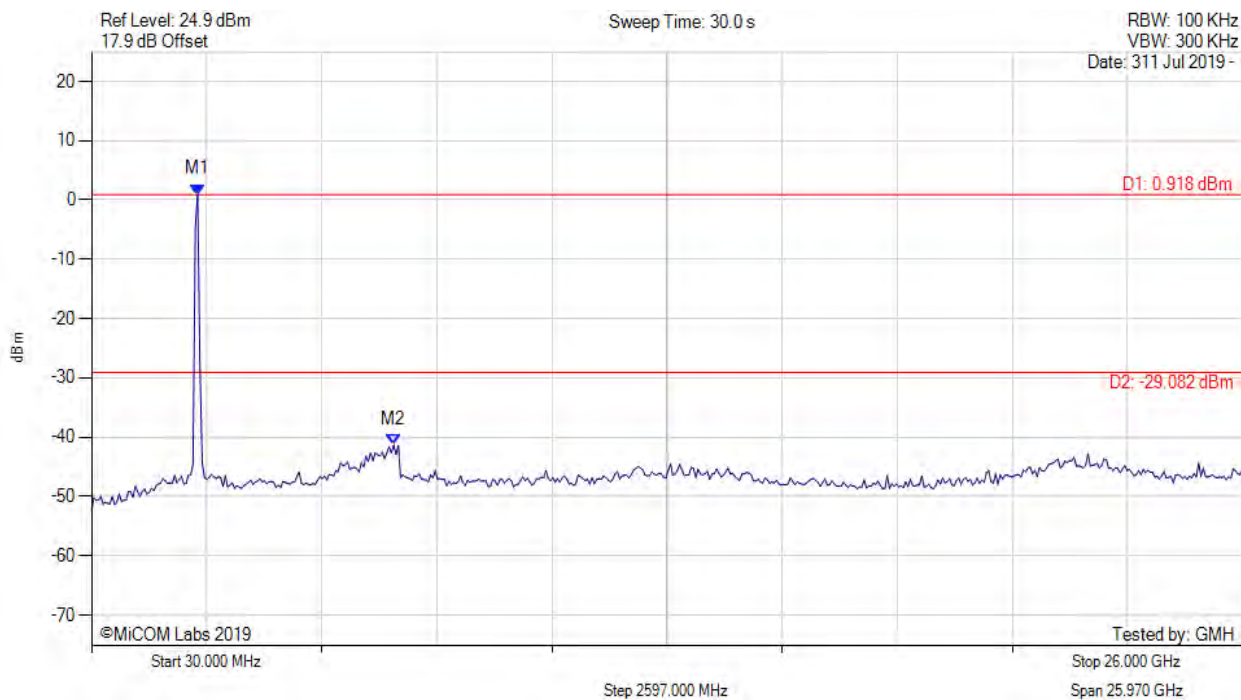


| Analyzer Setup  | Marker:Frequency:Amplitude                                       | Test Results                           |
|---|--|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2424.028 MHz : 0.918 dBm<br>M2 : 6847.776 MHz : -41.327 dBm | Limit: -29.08 dBm<br>Margin: -12.25 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

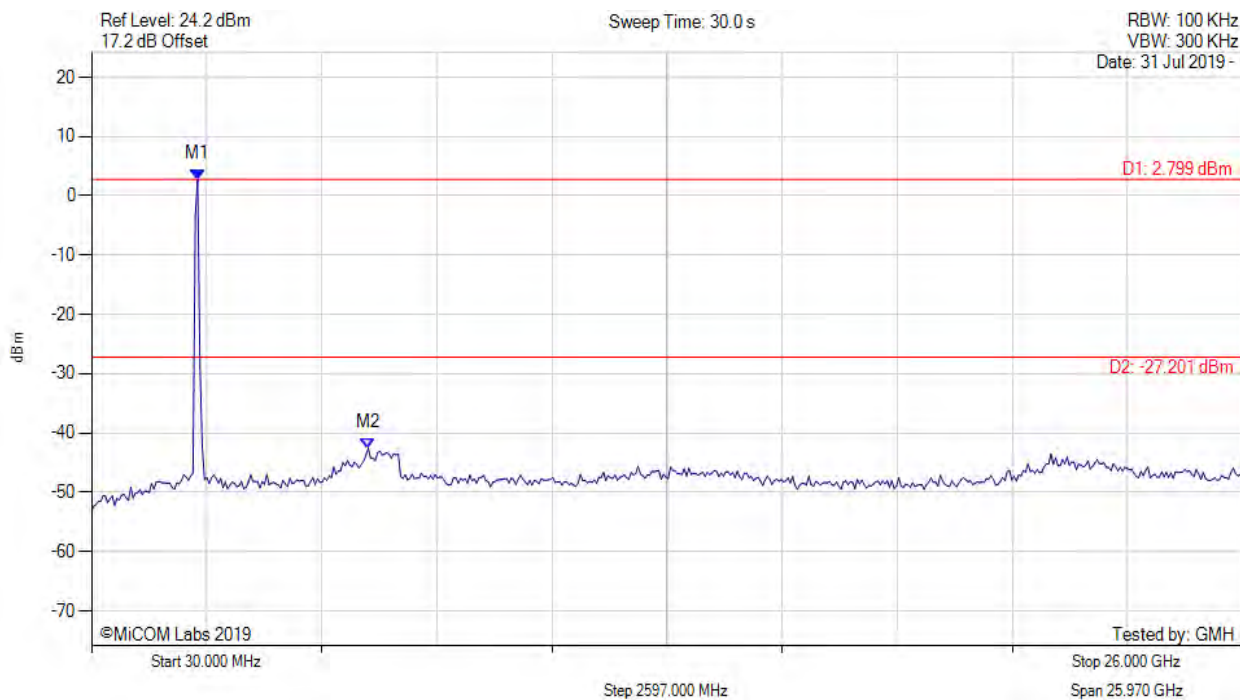


| Analyzer Setup  | Marker:Frequency:Amplitude                                       | Test Results                           |
|---|--|--|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2424.028 MHz : 2.799 dBm<br>M2 : 6275.291 MHz : -42.552 dBm | Limit: -27.20 dBm<br>Margin: -15.35 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

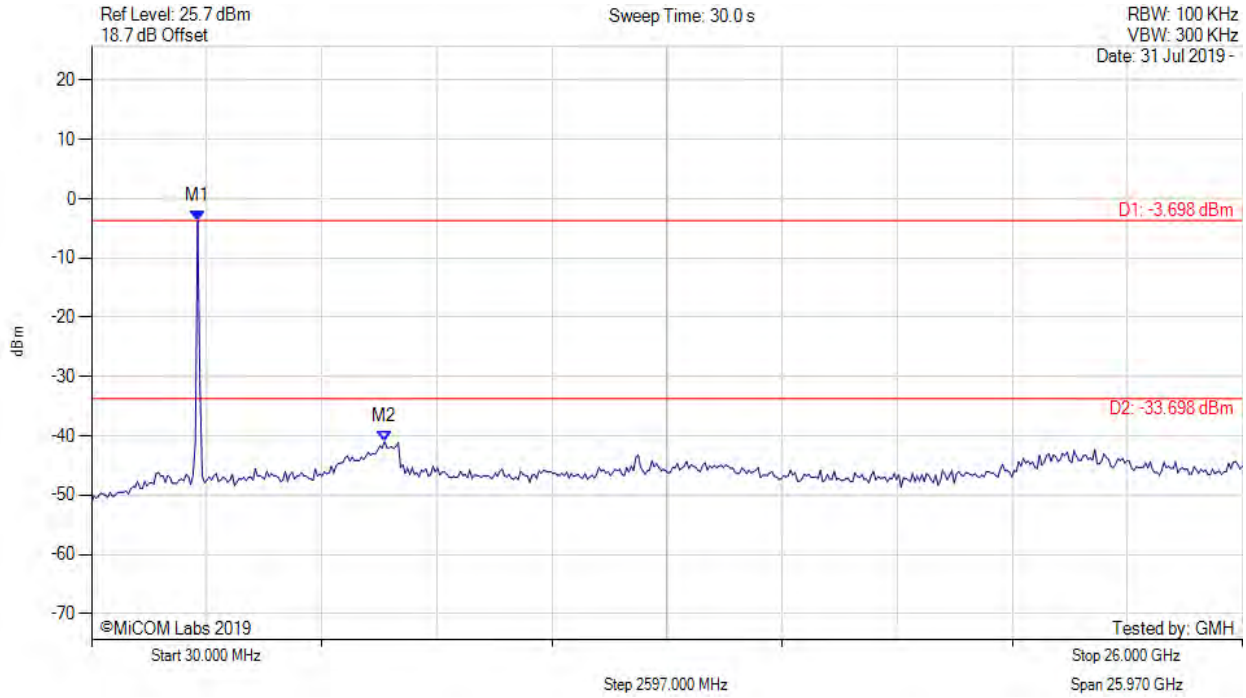


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results                          |
|---|---|---------------------------------------|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2424.028 MHz : -3.698 dBm<br>M2 : 6639.599 MHz : -40.970 dBm | Limit: -33.70 dBm<br>Margin: -7.27 dB |

[back to matrix](#)

CONDUCTED SPURIOUS EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

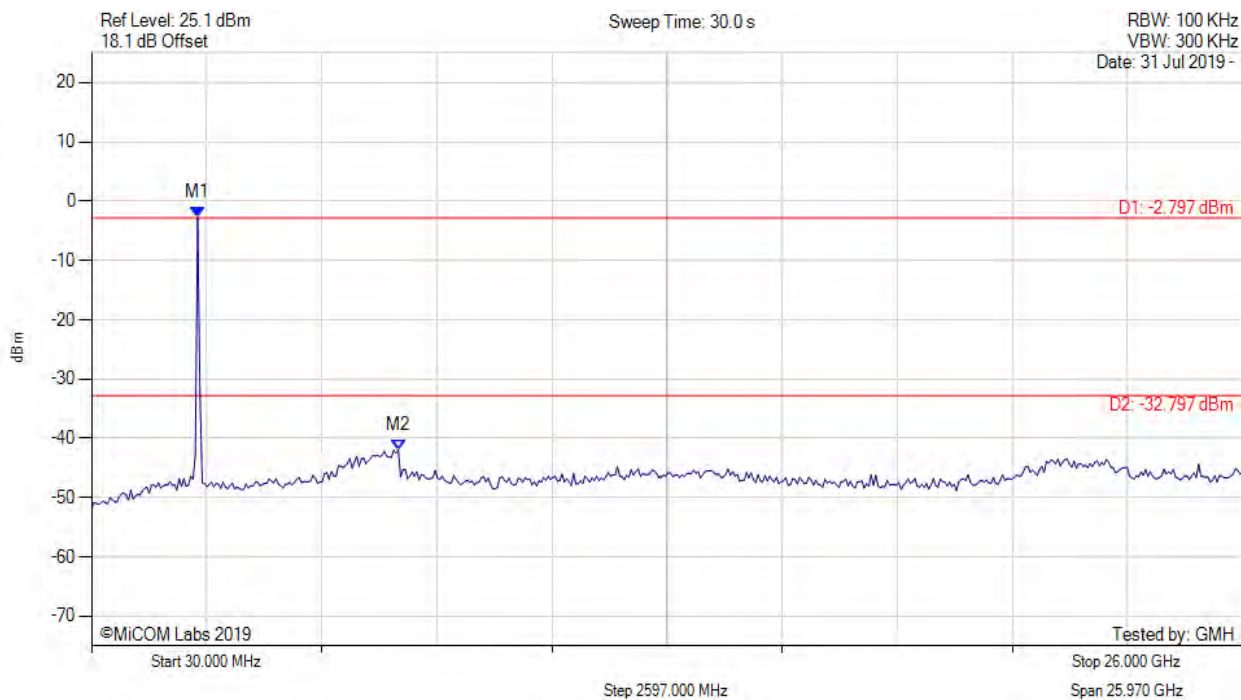

| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results                          |
|---|---|---------------------------------------|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2424.028 MHz : -2.797 dBm<br>M2 : 6951.864 MHz : -41.947 dBm | Limit: -32.80 dBm<br>Margin: -9.15 dB |

[back to matrix](#)




### A.3.1.2. Conducted Band-Edge Emissions

#### CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2412.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

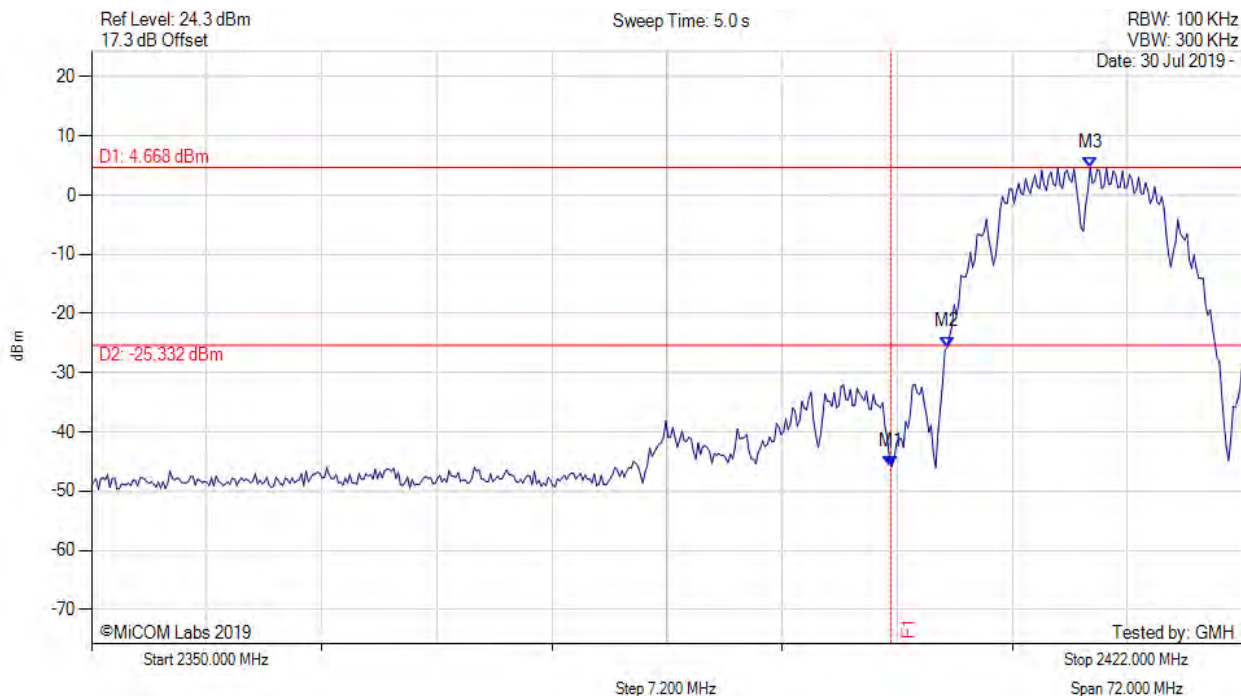


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results                   |
|---|---|--------------------------------|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2400.000 MHz : -45.799 dBm<br>M2 : 2403.531 MHz : -25.614 dBm<br>M3 : 2412.477 MHz : 4.668 dBm | Channel Frequency: 2412.00 MHz |

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

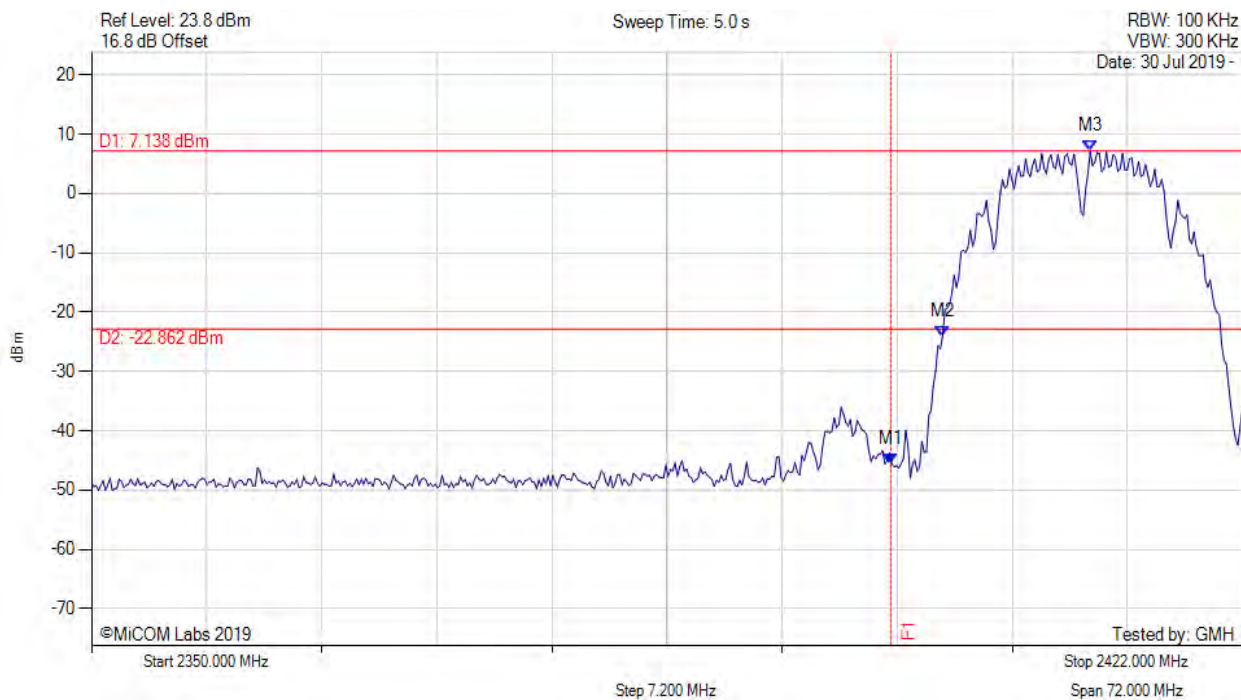


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results                   |
|---|---|--------------------------------|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2400.000 MHz : -45.614 dBm<br>M2 : 2403.242 MHz : -24.125 dBm<br>M3 : 2412.477 MHz : 7.138 dBm | Channel Frequency: 2412.00 MHz |

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2412.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

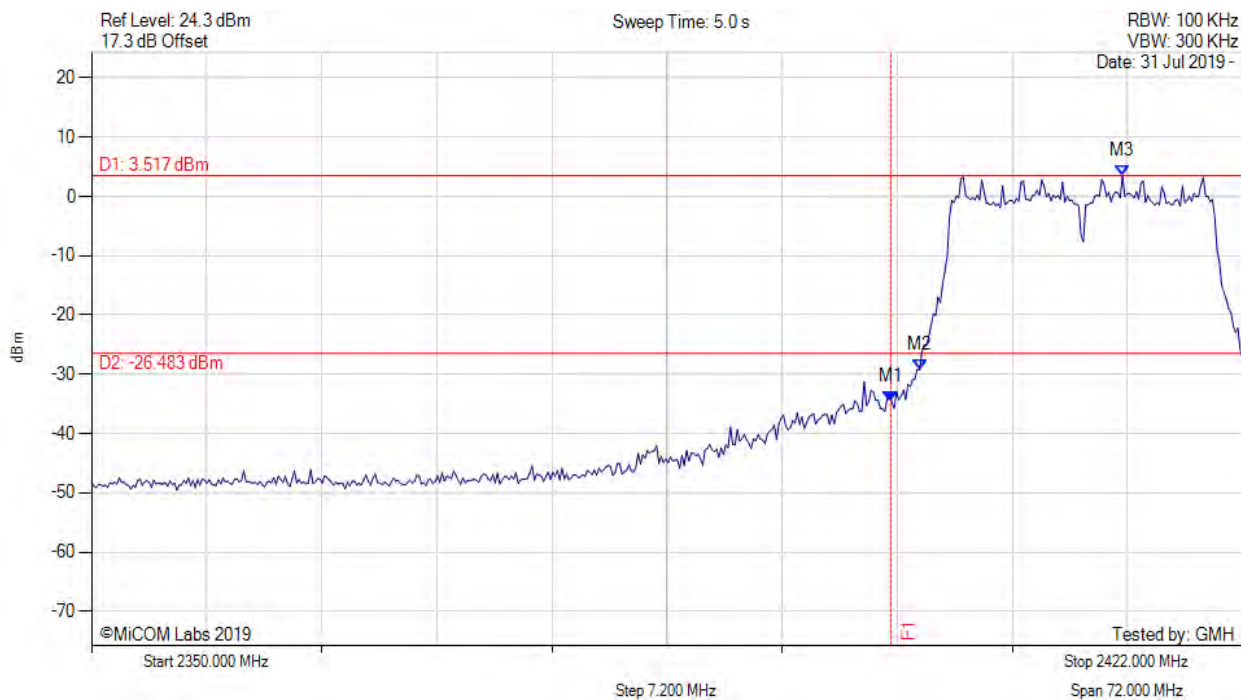


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results                   |
|---|---|--------------------------------|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2400.000 MHz : -34.632 dBm<br>M2 : 2401.800 MHz : -29.253 dBm<br>M3 : 2414.497 MHz : 3.517 dBm | Channel Frequency: 2412.00 MHz |

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

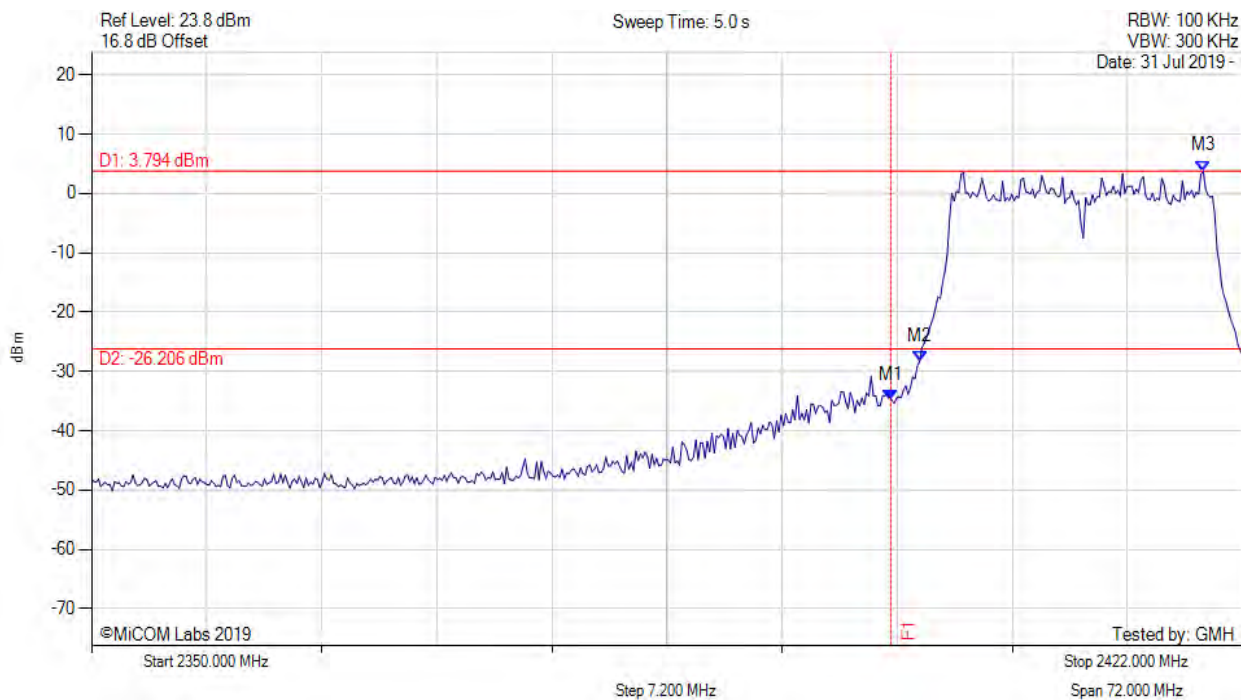


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results                   |
|---|---|--------------------------------|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2400.000 MHz : -34.857 dBm<br>M2 : 2401.800 MHz : -28.296 dBm<br>M3 : 2419.547 MHz : 3.794 dBm | Channel Frequency: 2412.00 MHz |

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

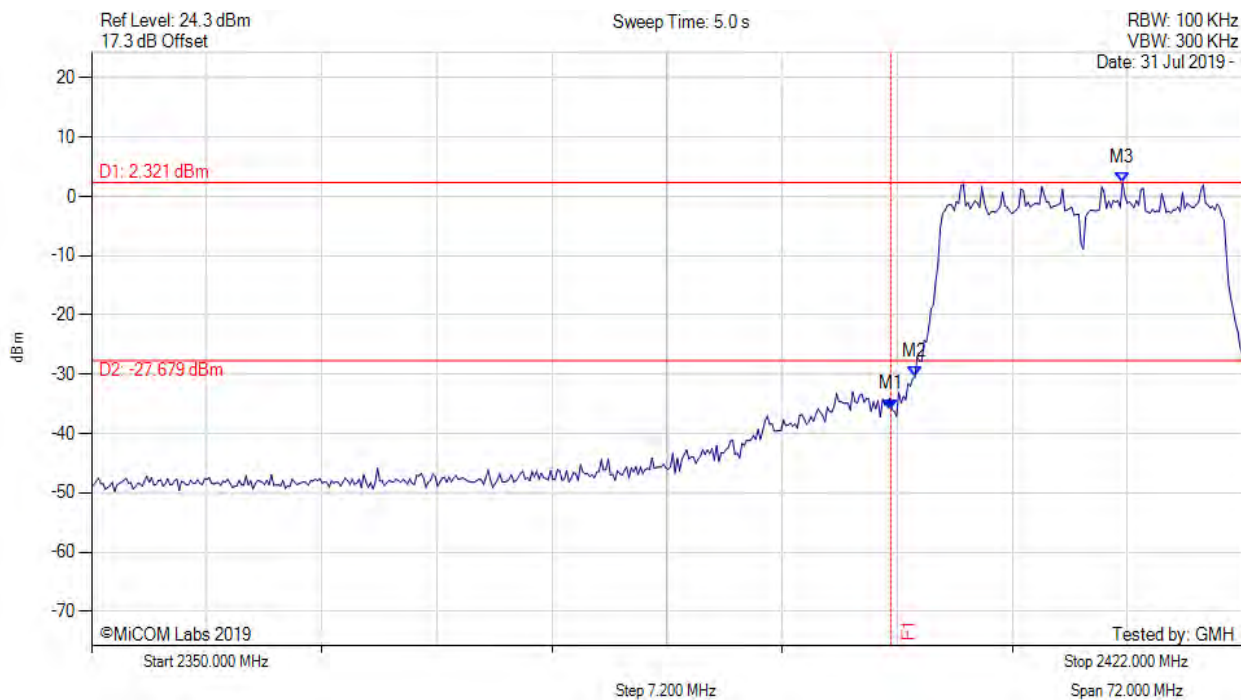


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results                   |
|---|---|--------------------------------|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2400.000 MHz : -35.905 dBm<br>M2 : 2401.511 MHz : -30.402 dBm<br>M3 : 2414.497 MHz : 2.321 dBm | Channel Frequency: 2412.00 MHz |

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

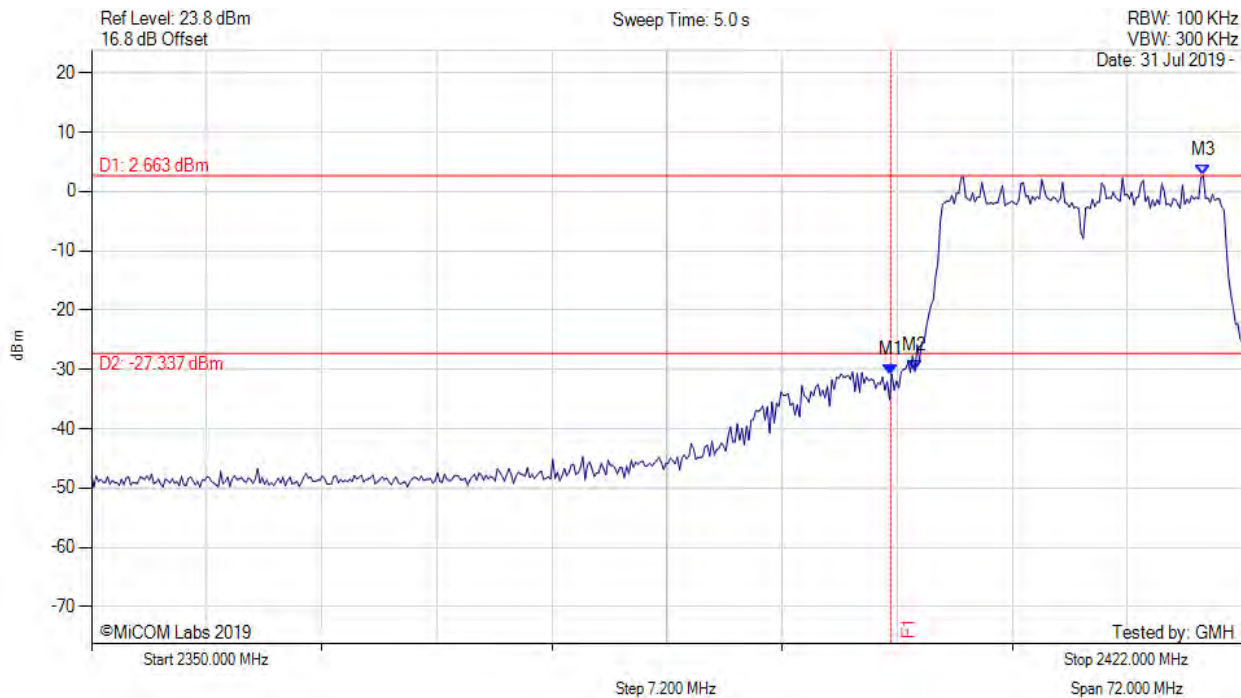


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results                   |
|---|---|--------------------------------|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2400.000 MHz : -30.843 dBm<br>M2 : 2401.511 MHz : -30.281 dBm<br>M3 : 2419.547 MHz : 2.663 dBm | Channel Frequency: 2412.00 MHz |

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

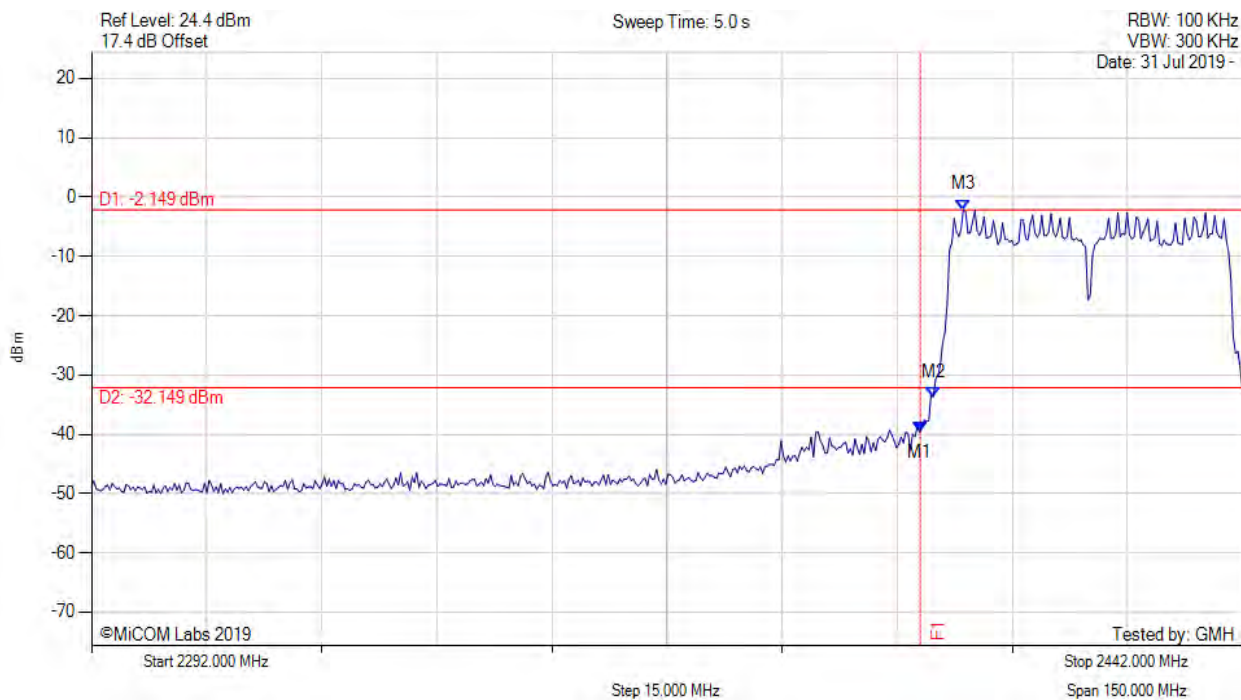


| Analyzer Setup  | Marker:Frequency:Amplitude   | Test Results                   |
|---|--|--------------------------------|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2400.000 MHz : -39.574 dBm<br>M2 : 2401.719 MHz : -33.733 dBm<br>M3 : 2405.627 MHz : -2.149 dBm | Channel Frequency: 2422.00 MHz |

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

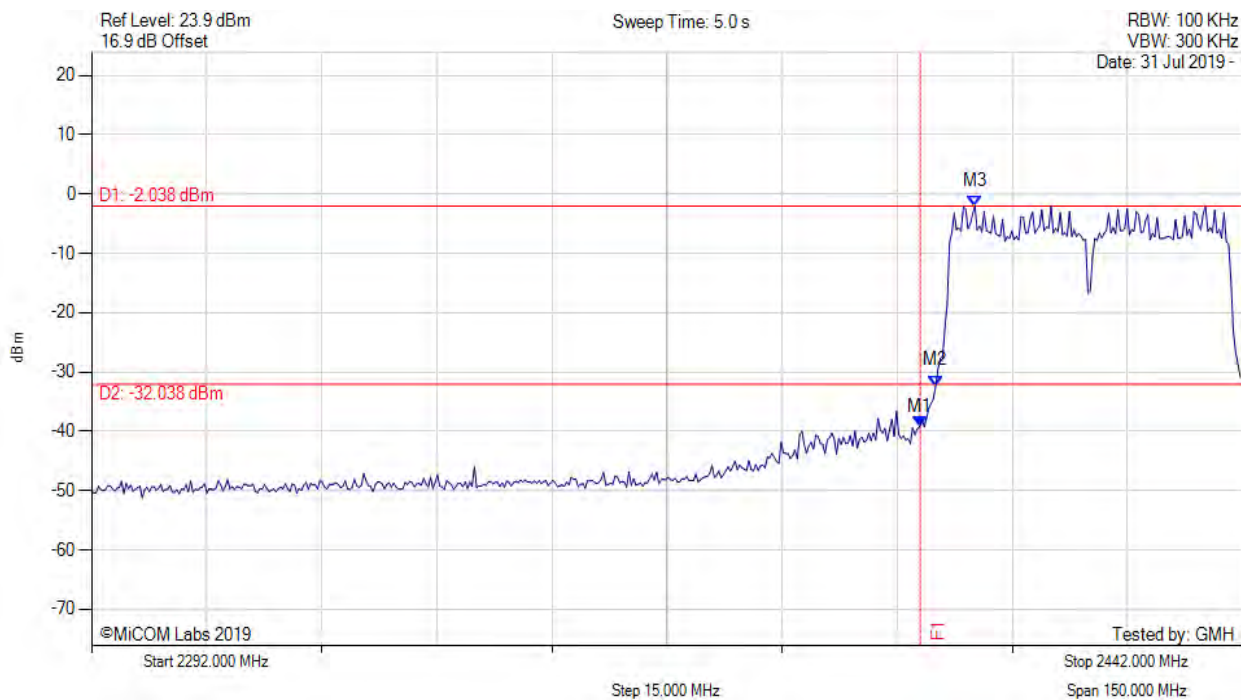

| Analyzer Setup  | Marker:Frequency:Amplitude   | Test Results                   |
|---|--|--------------------------------|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2400.000 MHz : -39.199 dBm<br>M2 : 2402.020 MHz : -32.343 dBm<br>M3 : 2407.130 MHz : -2.038 dBm | Channel Frequency: 2422.00 MHz |


[back to matrix](#)



CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

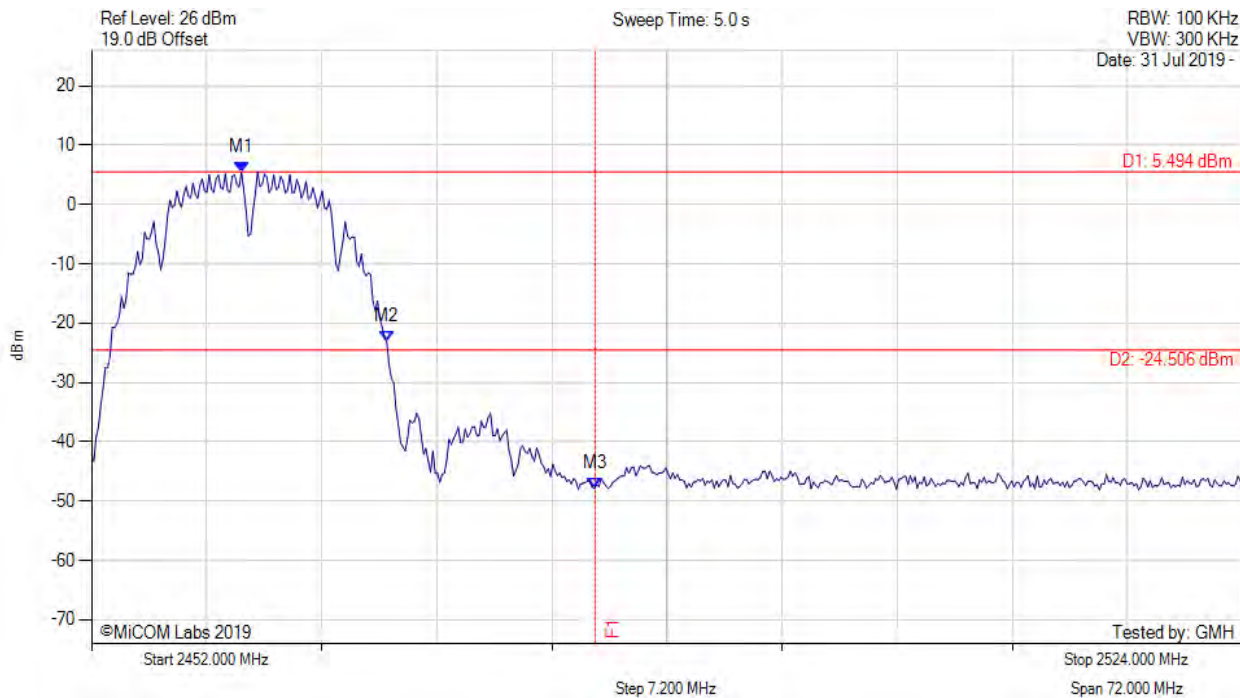


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results                   |
|---|---|--------------------------------|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2461.379 MHz : 5.494 dBm<br>M2 : 2470.469 MHz : -23.133 dBm<br>M3 : 2483.500 MHz : -47.864 dBm | Channel Frequency: 2462.00 MHz |

[back to matrix](#)

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11b, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

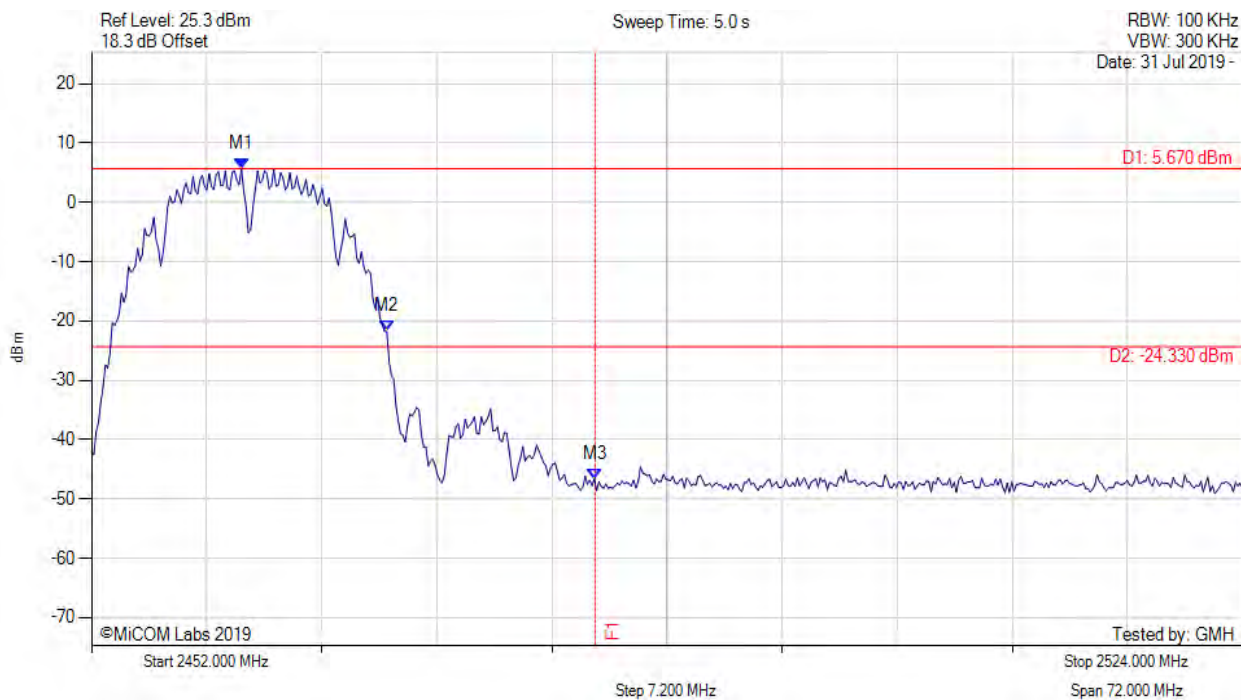


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results                   |
|---|---|--------------------------------|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2461.379 MHz : 5.670 dBm<br>M2 : 2470.469 MHz : -21.795 dBm<br>M3 : 2483.500 MHz : -46.627 dBm | Channel Frequency: 2462.00 MHz |

[back to matrix](#)

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

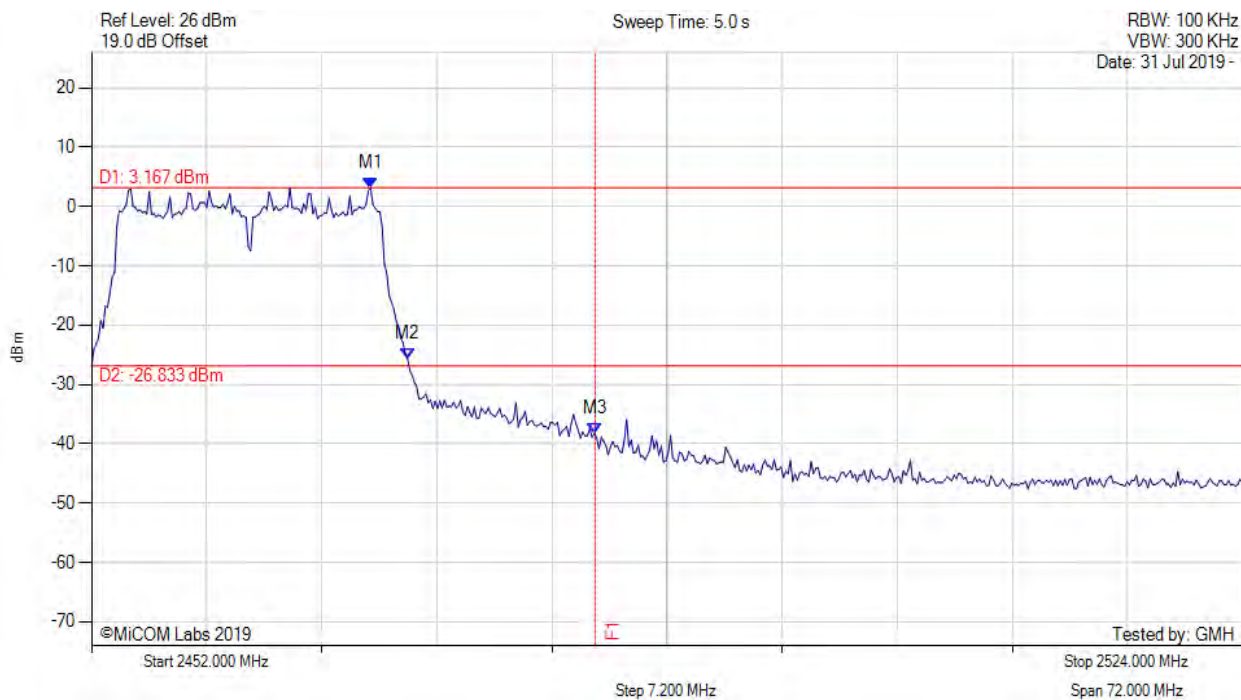


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results                   |
|---|---|--------------------------------|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2469.459 MHz : 3.167 dBm<br>M2 : 2471.768 MHz : -25.647 dBm<br>M3 : 2483.500 MHz : -38.272 dBm | Channel Frequency: 2462.00 MHz |

[back to matrix](#)

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11g, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

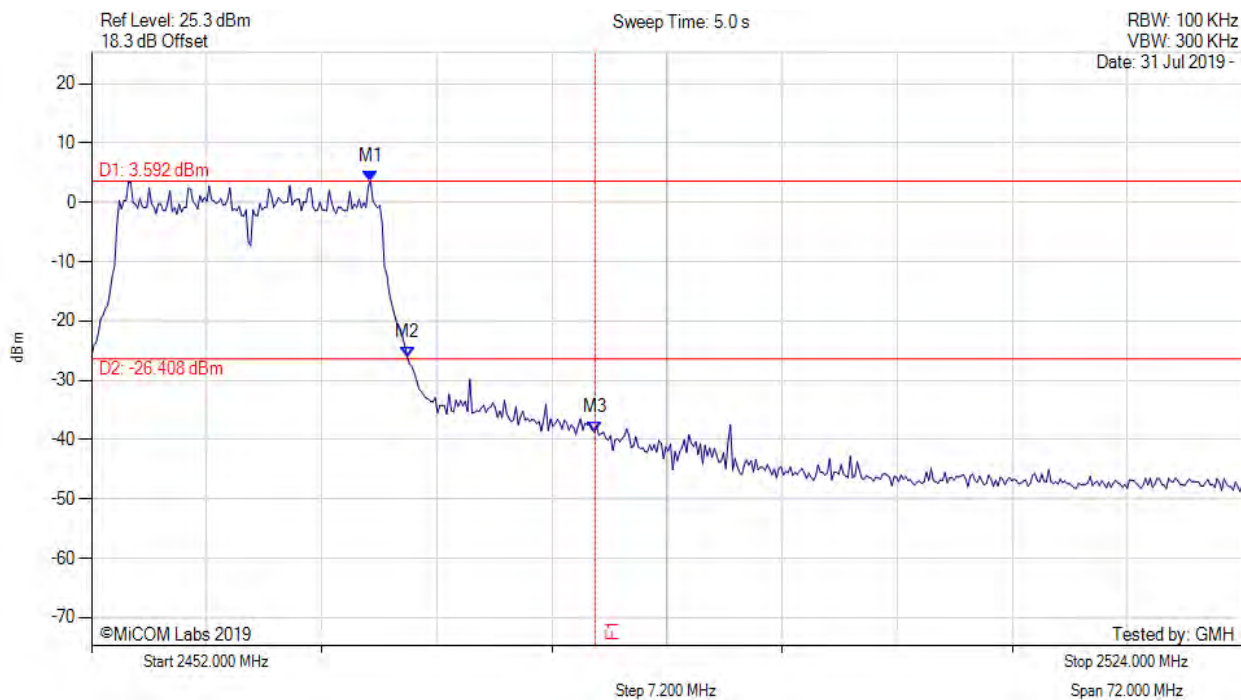


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results                   |
|---|---|--------------------------------|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2469.459 MHz : 3.592 dBm<br>M2 : 2471.768 MHz : -26.237 dBm<br>M3 : 2483.500 MHz : -38.773 dBm | Channel Frequency: 2462.00 MHz |

[back to matrix](#)

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

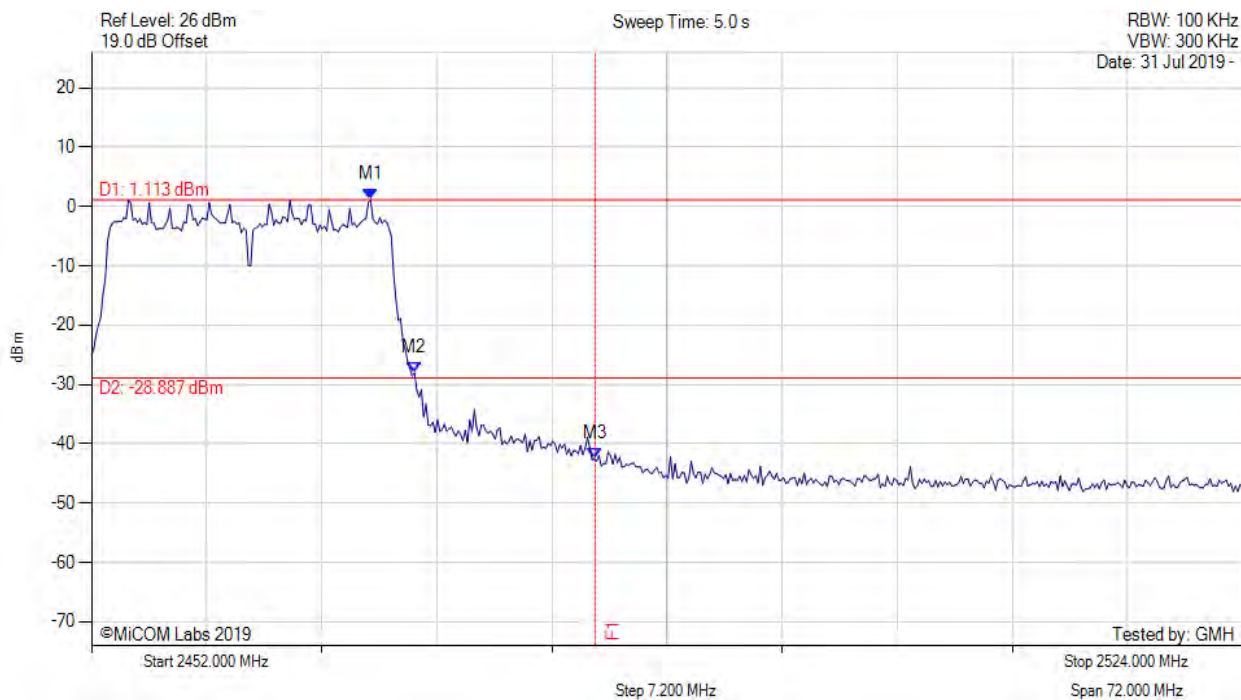


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results                   |
|---|---|--------------------------------|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2469.459 MHz : 1.113 dBm<br>M2 : 2472.200 MHz : -28.008 dBm<br>M3 : 2483.500 MHz : -42.572 dBm | Channel Frequency: 2462.00 MHz |

[back to matrix](#)

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

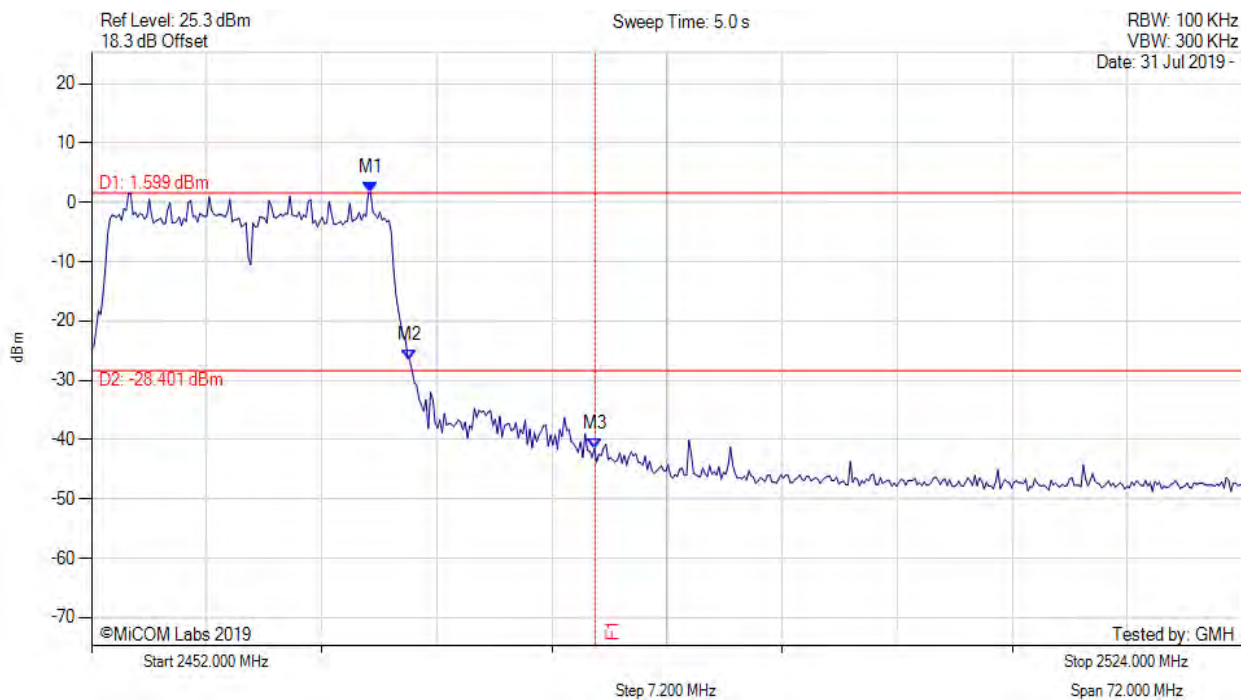


| Analyzer Setup  | Marker:Frequency:Amplitude  | Test Results                   |
|---|---|--------------------------------|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2469.459 MHz : 1.599 dBm<br>M2 : 2471.912 MHz : -26.685 dBm<br>M3 : 2483.500 MHz : -41.553 dBm | Channel Frequency: 2462.00 MHz |

[back to matrix](#)

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain a, Temp: 20, Voltage: 55 Vdc

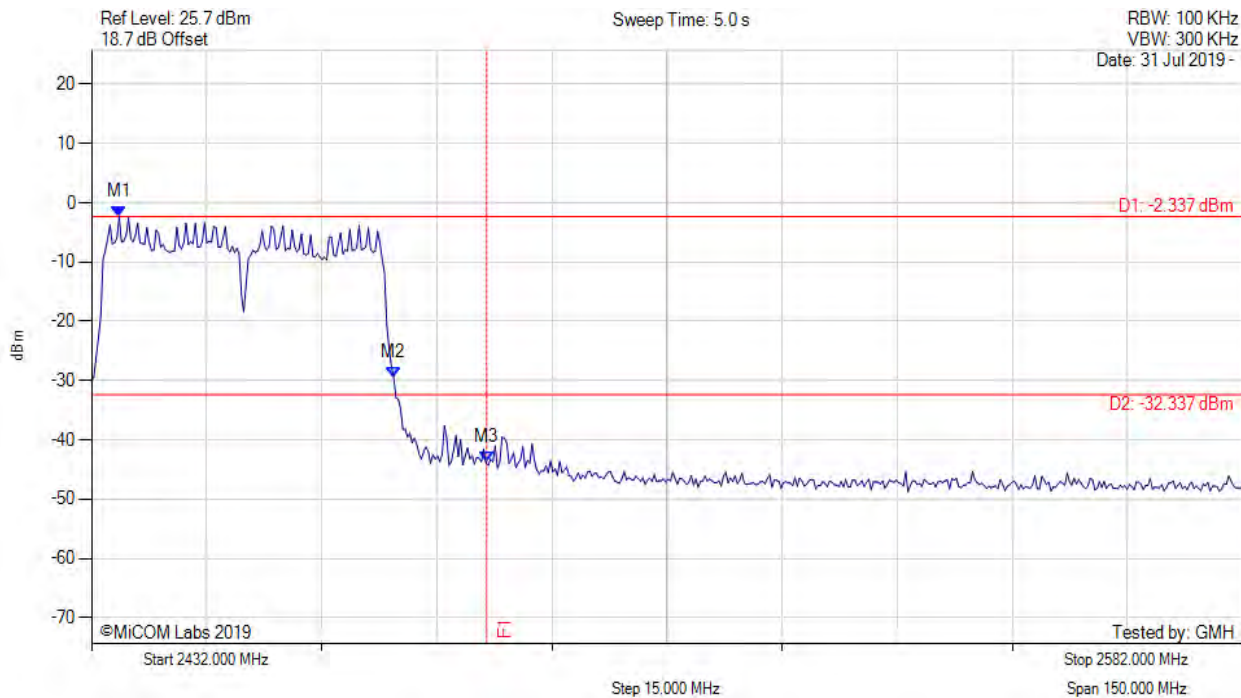


| Analyzer Setup  | Marker:Frequency:Amplitude   | Test Results                   |
|---|--|--------------------------------|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2435.607 MHz : -2.337 dBm<br>M2 : 2471.379 MHz : -29.453 dBm<br>M3 : 2483.500 MHz : -43.815 dBm | Channel Frequency: 2452.00 MHz |

[back to matrix](#)

CONDUCTED HIGH BAND-EDGE EMISSIONS - AVERAGE



Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain b, Temp: 20, Voltage: 55 Vdc

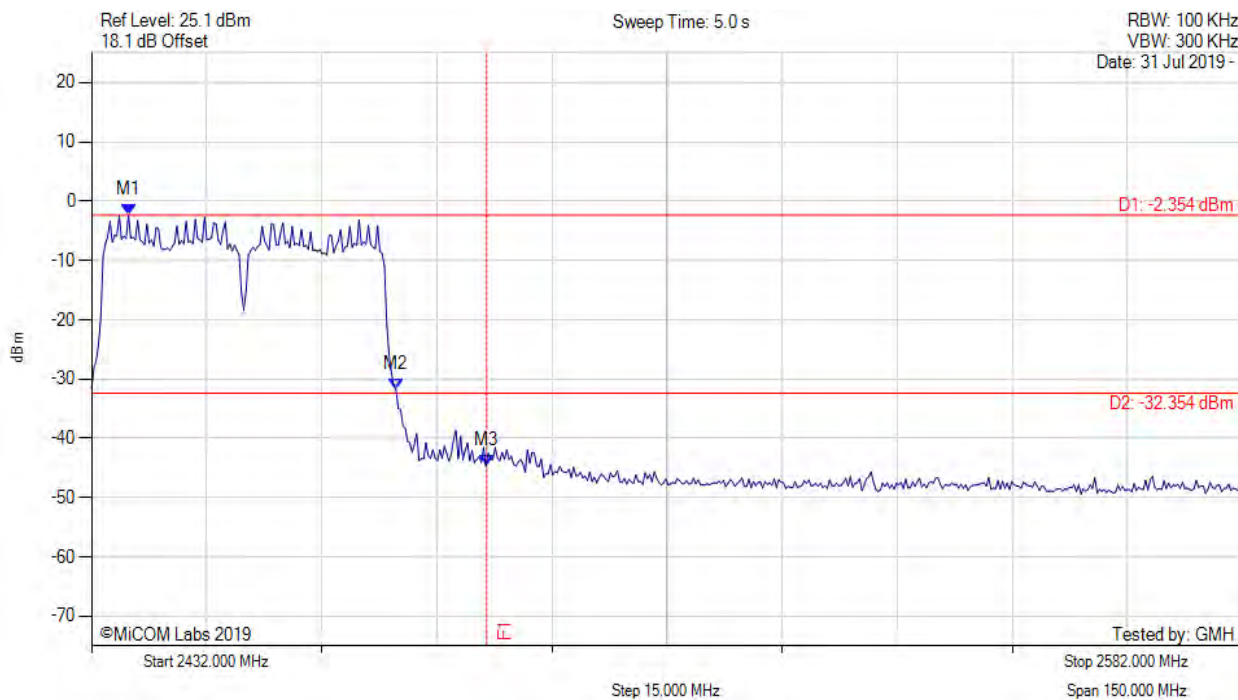

| Analyzer Setup  | Marker:Frequency:Amplitude   | Test Results                   |
|---|--|--------------------------------|
| Detector = MAX PEAK<br>Sweep Count = 0<br>RF Atten (dB) = 20<br>Trace Mode = VIEW | M1 : 2436.810 MHz : -2.354 dBm<br>M2 : 2471.679 MHz : -31.796 dBm<br>M3 : 2483.500 MHz : -44.674 dBm | Channel Frequency: 2452.00 MHz |

[back to matrix](#)




### A.3.2. Radiated Emissions

#### A.3.2.3. TX Spurious & Restricted Band Emissions



#### TX SPURIOUS & RESTRICTED BAND EMISSIONS

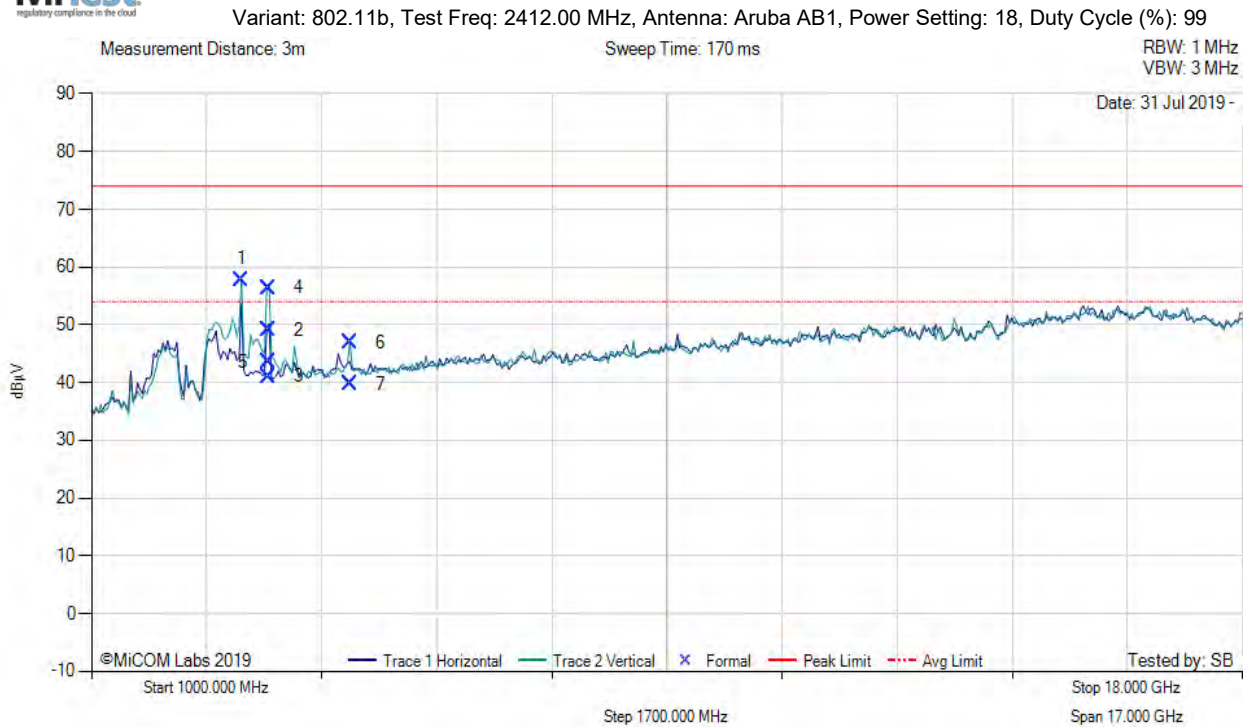

| 1000.00 - 18000.00 MHz |               |          |               |         |              |                  |            |        |         |              |           |            |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num                    | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1                      | 3215.99       | 71.48    | -2.04         | -11.58  | 57.86        | Peak (NRB)       | Vertical   | 100    | 0       | --           | --        | Pass       |
| 2                      | 3618.56       | 63.05    | -2.16         | -11.77  | 49.12        | Max Peak         | Horizontal | 137    | 336     | 74.0         | -24.9     | Pass       |
| 3                      | 3618.56       | 54.98    | -2.16         | -11.77  | 41.05        | Max Avg          | Horizontal | 137    | 336     | 54.0         | -13.0     | Pass       |
| 4                      | 3618.56       | 70.35    | -2.16         | -11.77  | 56.42        | Max Peak         | Vertical   | 152    | 28      | 74.0         | -17.6     | Pass       |
| 5                      | 3618.56       | 57.50    | -2.16         | -11.77  | 43.57        | Max Avg          | Vertical   | 152    | 28      | 54.0         | -10.4     | Pass       |
| 6                      | 4823.88       | 61.90    | -2.52         | -12.43  | 46.95        | Max Peak         | Vertical   | 99     | 332     | 74.0         | -27.1     | Pass       |
| 7                      | 4823.88       | 54.74    | -2.52         | -12.43  | 39.79        | Max Avg          | Vertical   | 99     | 332     | 54.0         | -14.2     | Pass       |

[back to matrix](#)

**TX SPURIOUS & RESTRICTED BAND EMISSIONS**




Variant: 802.11b, Test Freq: 2437.00 MHz, Antenna: Aruba AB1, Power Setting: 17, Duty Cycle (%): 99

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

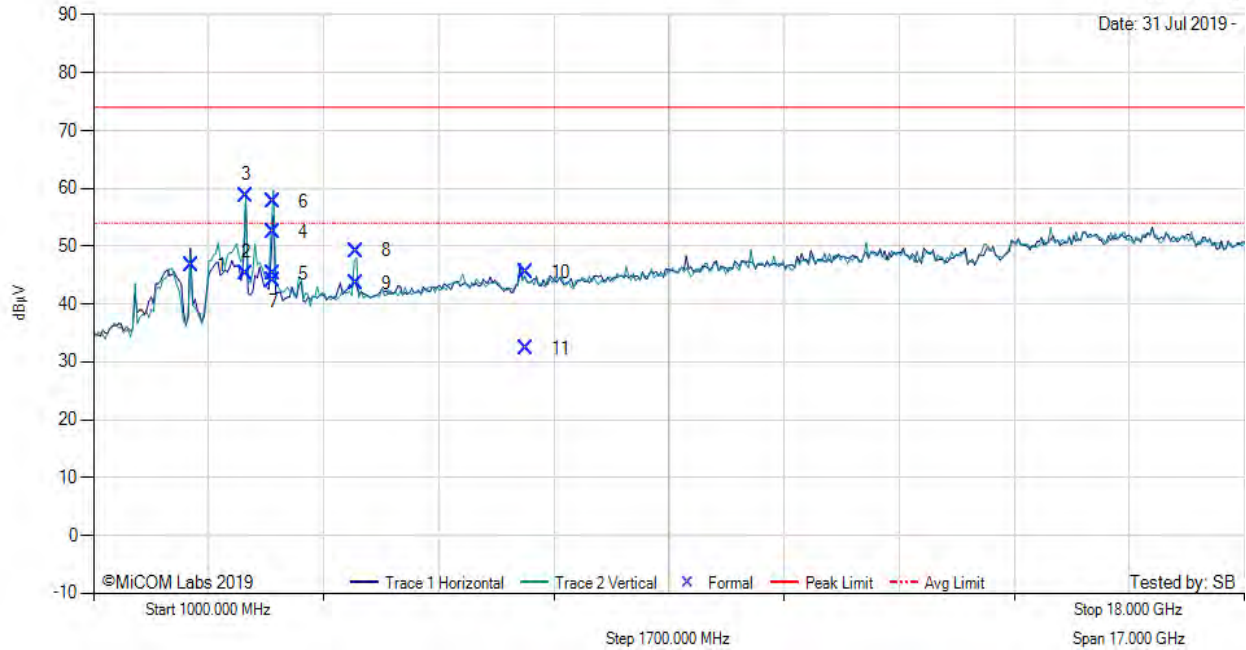

| 1000.00 - 18000.00 MHz |               |          |               |         |              |                  |            |        |         |              |           |            |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num                    | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1                      | 2437.98       | 60.50    | -1.78         | -12.10  | 46.62        | Fundamental      | Horizontal | 151    | 0       | --           | --        |            |
| 2                      | 3249.32       | 59.08    | -2.06         | -11.61  | 45.41        | Peak (NRB)       | Horizontal | 151    | 0       | --           | --        | Pass       |
| 3                      | 3249.36       | 72.46    | -2.06         | -11.61  | 58.79        | Peak (NRB)       | Vertical   | 151    | 0       | --           | --        | Pass       |
| 4                      | 3655.28       | 66.40    | -2.16         | -11.86  | 52.38        | Max Peak         | Horizontal | 119    | 26      | 74.0         | -21.6     | Pass       |
| 5                      | 3655.28       | 59.27    | -2.16         | -11.86  | 45.25        | Max Avg          | Horizontal | 119    | 26      | 54.0         | -8.8      | Pass       |
| 6                      | 3656.17       | 71.69    | -2.15         | -11.86  | 57.68        | Max Peak         | Vertical   | 153    | 7       | 74.0         | -16.3     | Pass       |
| 7                      | 3656.17       | 58.01    | -2.15         | -11.86  | 44.00        | Max Avg          | Vertical   | 153    | 7       | 54.0         | -10.0     | Pass       |
| 8                      | 4873.92       | 64.37    | -2.51         | -12.61  | 49.25        | Max Peak         | Vertical   | 180    | 14      | 74.0         | -24.8     | Pass       |
| 9                      | 4873.92       | 58.72    | -2.51         | -12.61  | 43.60        | Max Avg          | Vertical   | 180    | 14      | 54.0         | -10.4     | Pass       |
| 10                     | 7379.06       | 56.48    | -3.03         | -8.00   | 45.45        | Max Peak         | Horizontal | 98     | 230     | 74.0         | -28.6     | Pass       |
| 11                     | 7379.06       | 43.31    | -3.03         | -8.00   | 32.28        | Max Avg          | Horizontal | 98     | 230     | 54.0         | -21.7     | Pass       |

[back to matrix](#)

**TX SPURIOUS & RESTRICTED BAND EMISSIONS**




Variant: 802.11b, Test Freq: 2462.00 MHz, Antenna: Aruba AB1, Power Setting: 17, Duty Cycle (%): 99

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz  
VBW: 3 MHz

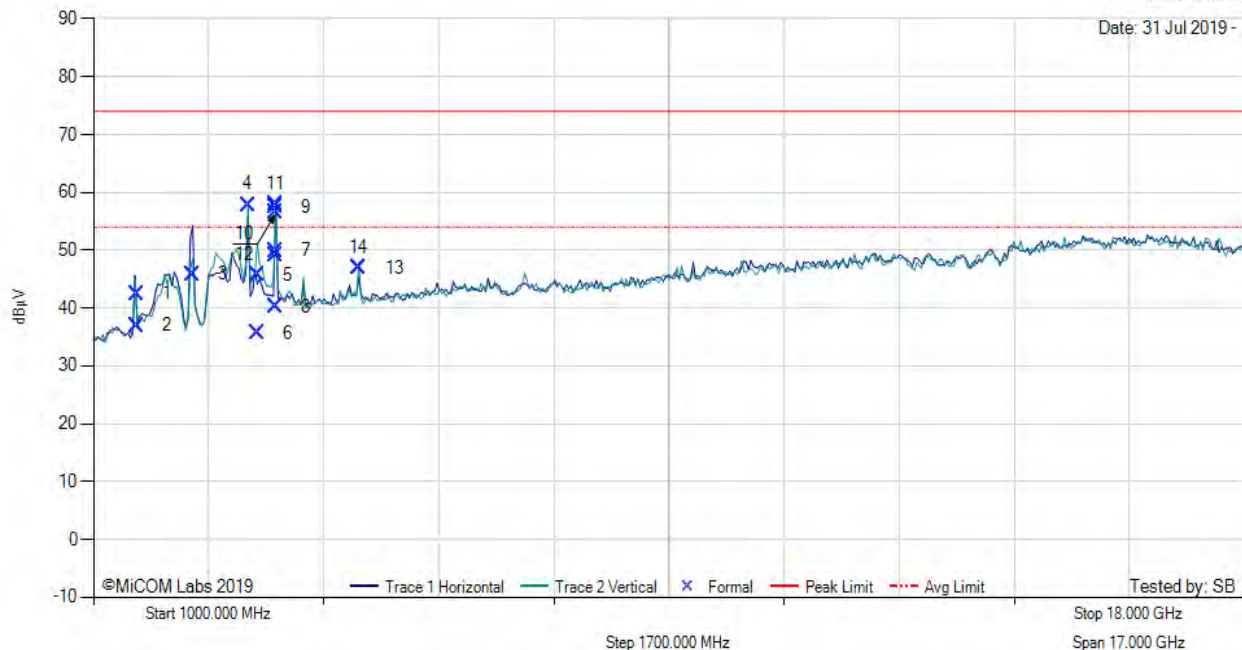


| 1000.00 - 18000.00 MHz |               |          |               |         |              |                  |            |        |         |              |           |            |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num                    | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1                      | 1641.70       | 59.97    | -1.46         | -16.01  | 42.50        | Max Peak         | Vertical   | 186    | 23      | 74.0         | -31.5     | Pass       |
| 2                      | 1641.70       | 54.46    | -1.46         | -16.01  | 36.99        | Max Avg          | Vertical   | 186    | 23      | 54.0         | -17.0     | Pass       |
| 3                      | 2463.11       | 59.57    | -1.79         | -11.96  | 45.82        | Peak (NRB)       | Horizontal | 100    | 0       | --           | --        | Pass       |
| 4                      | 3282.37       | 71.54    | -2.04         | -11.69  | 57.81        | Peak (NRB)       | Vertical   | 150    | 0       | --           | --        | Pass       |
| 5                      | 3424.80       | 60.04    | -2.10         | -12.14  | 45.80        | Max Peak         | Horizontal | 186    | 334     | 74.0         | -28.2     | Pass       |
| 6                      | 3424.80       | 49.87    | -2.10         | -12.14  | 35.63        | Max Avg          | Horizontal | 186    | 334     | 54.0         | -18.4     | Pass       |
| 7                      | 3692.53       | 63.79    | -2.17         | -11.68  | 49.94        | Max Peak         | Horizontal | 197    | 282     | 74.0         | -24.1     | Pass       |
| 8                      | 3692.53       | 54.00    | -2.17         | -11.68  | 40.15        | Max Avg          | Horizontal | 197    | 282     | 54.0         | -13.9     | Pass       |
| 9                      | 3692.73       | 71.26    | -2.17         | -11.68  | 57.41        | Peak (Scan)      | Vertical   | 100    | 0       | 74.0         | -16.6     | Pass       |
| 10                     | 3692.87       | 70.30    | -2.17         | -11.68  | 56.45        | Peak (Scan)      | Horizontal | 100    | 0       | 74.0         | -17.6     | Pass       |
| 11                     | 3693.20       | 71.87    | -2.17         | -11.67  | 58.03        | Max Peak         | Vertical   | 167    | 31      | 74.0         | -16.0     | Pass       |
| 12                     | 3693.20       | 63.08    | -2.17         | -11.67  | 49.24        | Max Avg          | Vertical   | 167    | 31      | 54.0         | -4.8      | Pass       |
| 13                     | 4924.10       | 61.91    | -2.56         | -12.35  | 47.00        | Peak (Scan)      | Vertical   | 150    | 0       | 74.0         | -27.0     | Pass       |
| 14                     | 4924.10       | 61.91    | -2.56         | -12.35  | 47.00        | Peak (Scan)      | Horizontal | 150    | 0       | 74.0         | -27.0     | Pass       |

[back to matrix](#)

### A.3.2.4. Restricted Edge & Band-Edge Emissions



#### RADIATED - LOWER RESTRICTED BAND-EDGE EMISSIONS

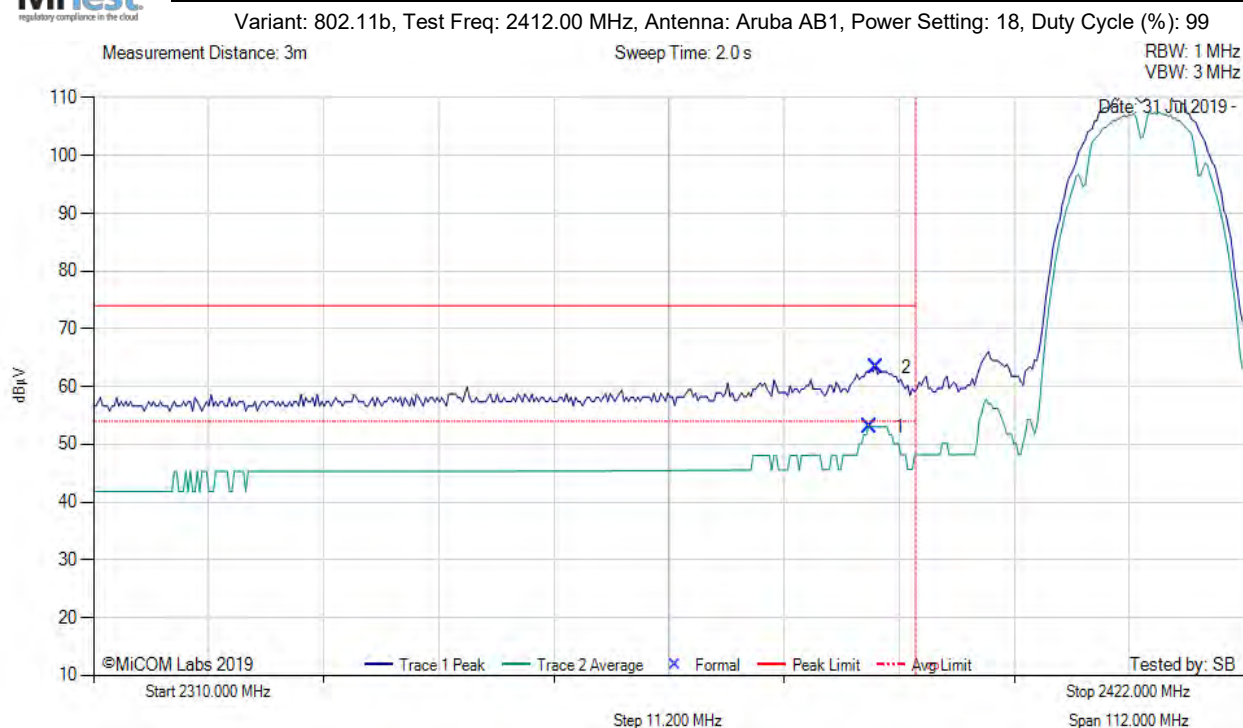


| 2310.00 - 2422.00 MHz |               |          |               |         |              |                  |            |        |         |              |           |            |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num                   | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1                     | 2385.51       | 22.86    | -1.77         | 31.94   | 53.03        | Max Avg          | Horizontal | 156    | 11      | 54.0         | -1.0      | Pass       |
| 2                     | 2386.18       | 33.19    | -1.77         | 31.94   | 63.36        | Max Peak         | Horizontal | 156    | 11      | 74.0         | -10.6     | Pass       |
| 3                     | 2390.00       | --       | --            | --      | --           | Restricted-Band  | --         | --     | --      | --           | --        | --         |

[back to matrix](#)



**RADIATED - LOWER RESTRICTED BAND-EDGE EMISSIONS**

Variant: 802.11g, Test Freq: 2412.00 MHz, Antenna: Aruba AB1, Power Setting: 16, Duty Cycle (%): 99

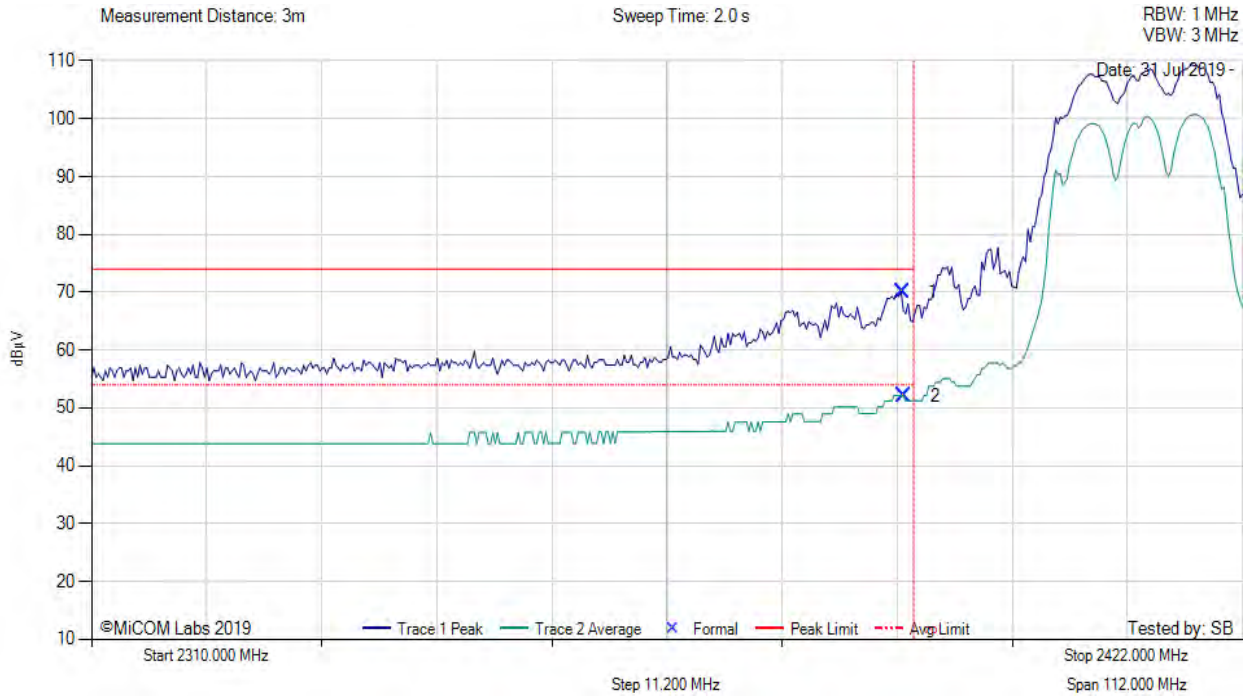

| 2310.00 - 2422.00 MHz |               |          |               |         |              |                  |            |        |         |              |           |            |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num                   | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1                     | 2388.88       | 39.92    | -1.77         | 31.95   | 70.10        | Max Peak         | Horizontal | 156    | 11      | 74.0         | -3.9      | Pass       |
| 2                     | 2389.10       | 21.97    | -1.77         | 31.95   | 52.15        | Max Avg          | Horizontal | 156    | 11      | 54.0         | -1.9      | Pass       |
| 3                     | 2390.00       | --       | --            | --      | --           | Restricted-Band  | --         | --     | --      | --           | --        | --         |

[back to matrix](#)




RADIATED - LOWER RESTRICTED BAND-EDGE EMISSIONS

Variant: 802.11n HT-20, Test Freq: 2412.00 MHz, Antenna: Aruba AB1, Power Setting: 15, Duty Cycle (%): 99

Measurement Distance: 3m

Sweep Time: 2.0 s

RBW: 1 MHz  
VBW: 3 MHz

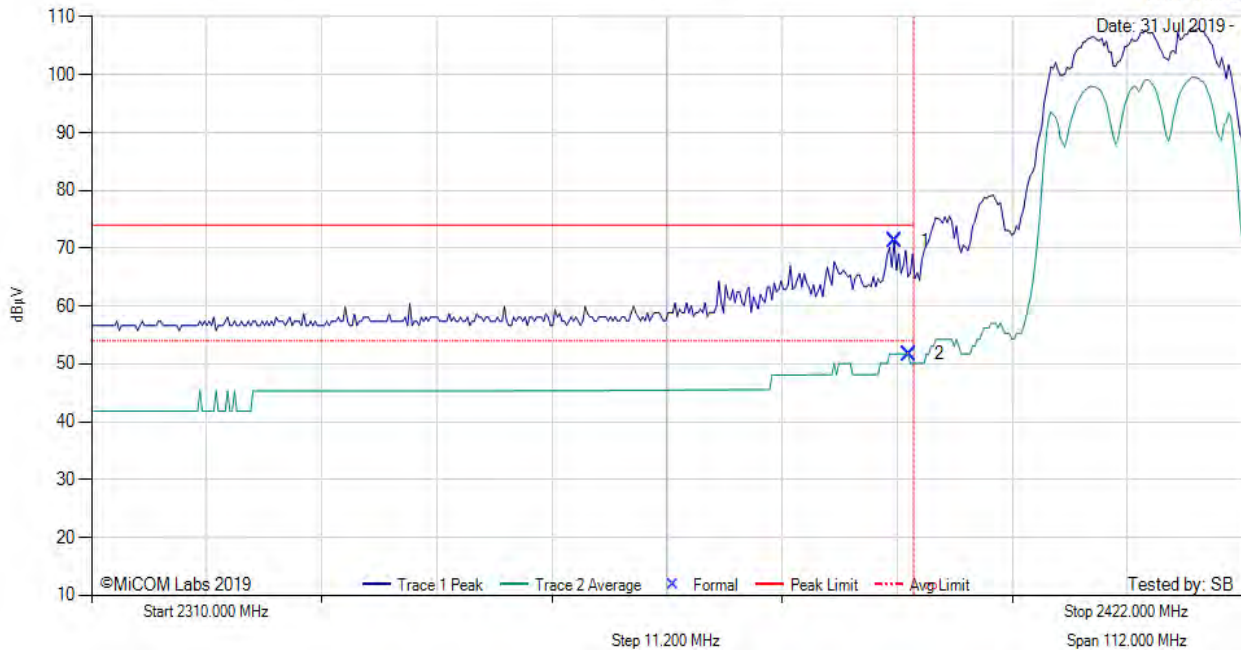


| 2310.00 - 2422.00 MHz |               |          |               |         |              |                  |            |        |         |              |           |            |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num                   | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1                     | 2388.20       | 41.08    | -1.77         | 31.95   | 71.26        | Max Peak         | Horizontal | 156    | 11      | 74.0         | -2.7      | Pass       |
| 2                     | 2389.55       | 21.53    | -1.77         | 31.96   | 51.72        | Max Avg          | Horizontal | 156    | 11      | 54.0         | -2.3      | Pass       |
| 3                     | 2390.00       | --       | --            | --      | --           | Restricted-Band  | --         | --     | --      | --           | --        | --         |

[back to matrix](#)



**RADIATED - LOWER RESTRICTED BAND-EDGE EMISSIONS**

Variant: 802.11n HT-40, Test Freq: 2422.00 MHz, Antenna: Aruba AB1, Power Setting: 13, Duty Cycle (%): 99

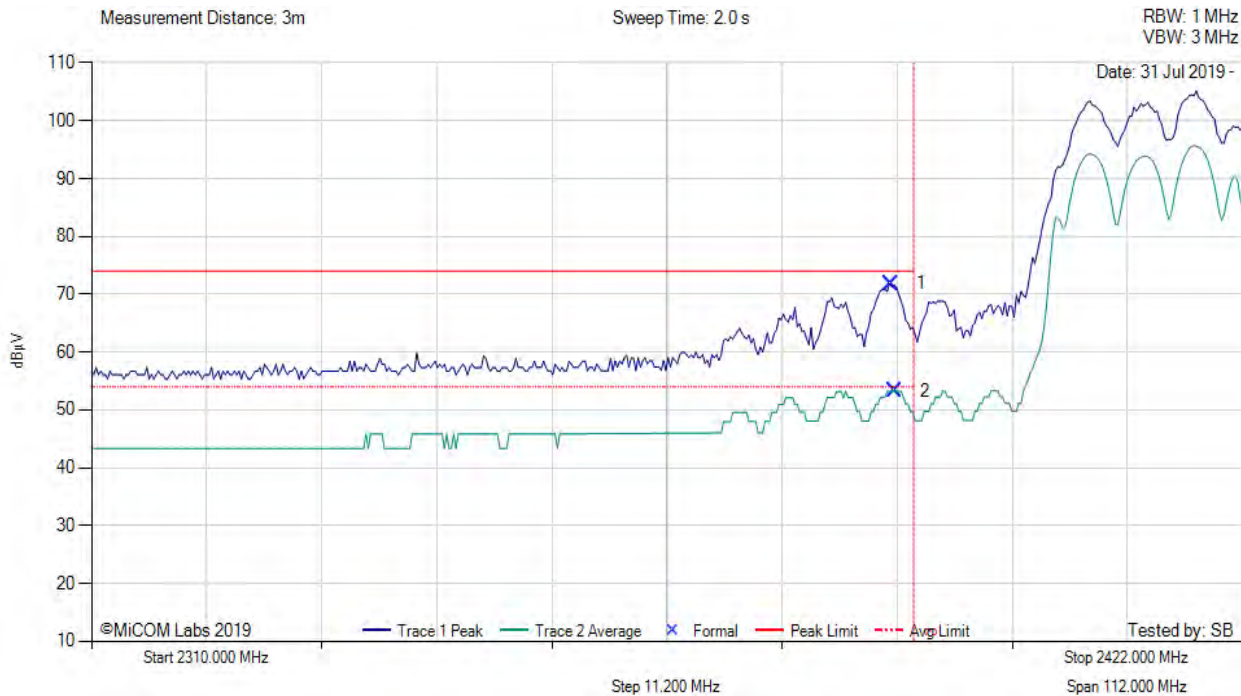

| 2310.00 - 2422.00 MHz |               |          |               |         |              |                  |            |        |         |              |           |            |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num                   | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1                     | 2387.76       | 41.69    | -1.77         | 31.95   | 71.87        | Max Peak         | Horizontal | 156    | 11      | 74.0         | -2.1      | Pass       |
| 2                     | 2388.20       | 23.05    | -1.77         | 31.95   | 53.23        | Max Avg          | Horizontal | 156    | 11      | 54.0         | -0.8      | Pass       |
| 3                     | 2390.00       | --       | --            | --      | --           | Restricted-Band  | --         | --     | --      | --           | --        | --         |

[back to matrix](#)



**RADIATED - UPPER RESTRICTED BAND-EDGE EMISSIONS**


Variant: 802.11b, Test Freq: 2462.00 MHz, Antenna: Aruba AB1, Power Setting: 18, Duty Cycle (%): 99

Measurement Distance: 3m

Sweep Time: 2.0 s

RBW: 1 MHz  
VBW: 3 MHz

Date: 31 Jul 2019 -

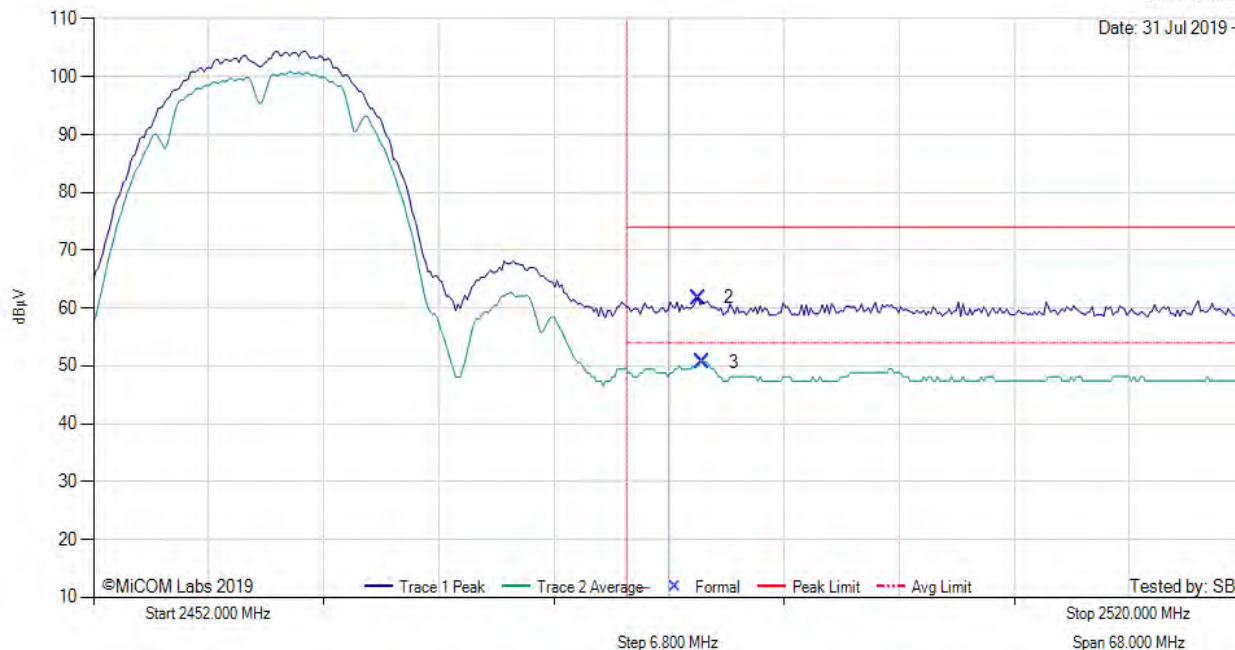

| 2452.00 - 2520.00 MHz |               |          |               |         |              |                  |            |        |         |              |           |            |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num                   | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 2                     | 2487.72       | 31.27    | -1.78         | 32.33   | 61.82        | Max Peak         | Horizontal | 156    | 11      | 74.0         | -12.2     | Pass       |
| 3                     | 2488.00       | 20.08    | -1.78         | 32.33   | 50.63        | Max Avg          | Horizontal | 156    | 11      | 54.0         | -3.4      | Pass       |
| 1                     | 2483.50       | --       | --            | --      | --           | Restricted-Band  | --         | --     | --      | --           | --        | --         |


[back to matrix](#)





**RADIATED - UPPER RESTRICTED BAND-EDGE EMISSIONS**

Variant: 802.11g, Test Freq: 2462.00 MHz, Antenna: Aruba AB1, Power Setting: 16, Duty Cycle (%): 99

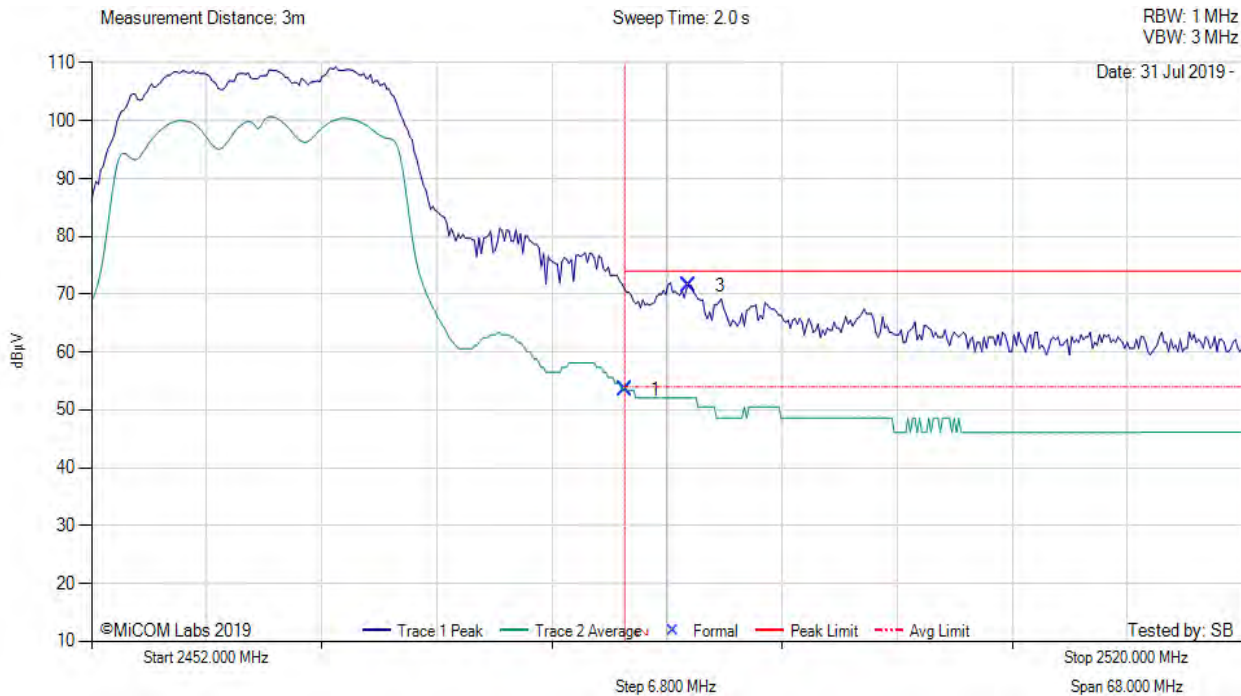

| 2452.00 - 2520.00 MHz |               |          |               |         |              |                  |            |        |         |              |           |            |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num                   | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1                     | 2483.50       | 22.89    | -1.78         | 32.33   | 53.44        | Max Avg          | Horizontal | 156    | 11      | 54.0         | -0.6      | Pass       |
| 3                     | 2487.32       | 40.96    | -1.78         | 32.33   | 71.51        | Max Peak         | Horizontal | 156    | 11      | 74.0         | -2.5      | Pass       |
| 2                     | 2483.50       | --       | --            | --      | --           | Restricted-Band  | --         | --     | --      | --           | --        | --         |

[back to matrix](#)



**RADIATED - UPPER RESTRICTED BAND-EDGE EMISSIONS**


Variant: 802.11n HT-20, Test Freq: 2462.00 MHz, Antenna: Aruba AB1, Power Setting: 14, Duty Cycle (%): 99

Measurement Distance: 3m

Sweep Time: 2.0 s

RBW: 1 MHz

VBW: 3 MHz

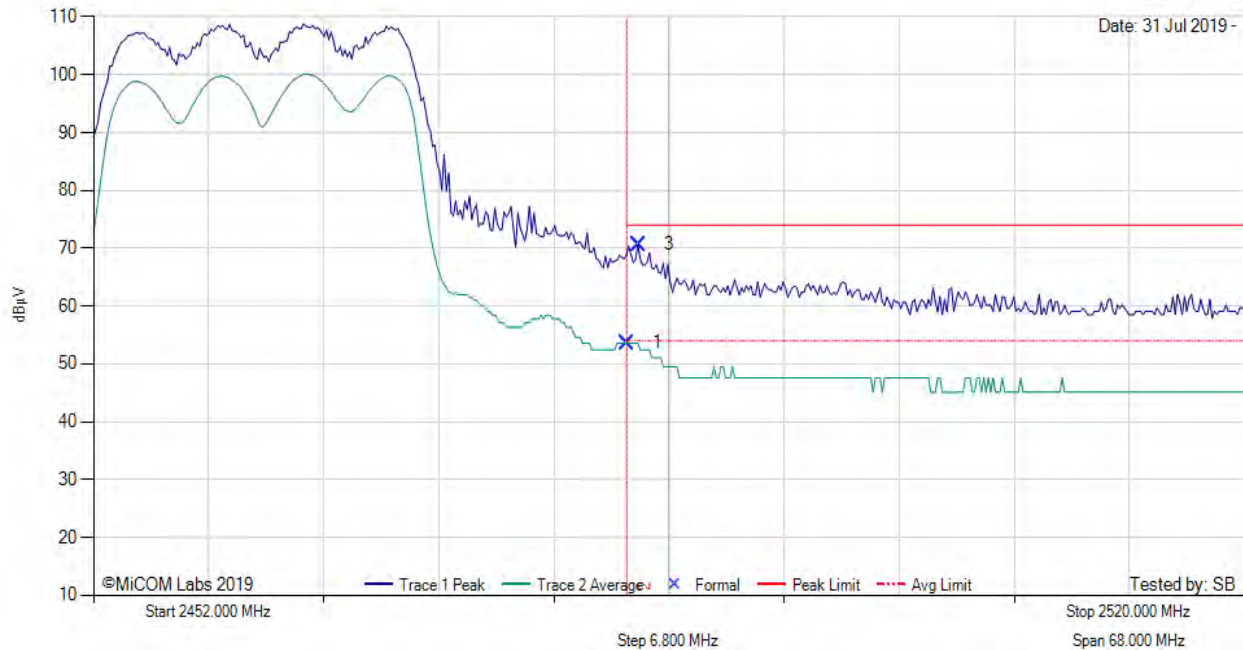

| 2452.00 - 2520.00 MHz |               |          |               |         |              |                  |            |        |         |              |           |            |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num                   | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1                     | 2483.50       | 23.05    | -1.78         | 32.33   | 53.60        | Max Avg          | Horizontal | 156    | 11      | 54.0         | -0.4      | Pass       |
| 3                     | 2484.18       | 40.11    | -1.78         | 32.33   | 70.66        | Max Peak         | Horizontal | 156    | 11      | 74.0         | -3.3      | Pass       |
| 2                     | 2483.50       | --       | --            | --      | --           | Restricted-Band  | --         | --     | --      | --           | --        | --         |

[back to matrix](#)




**RADIATED - UPPER RESTRICTED BAND-EDGE EMISSIONS**

Variant: 802.11n HT-40, Test Freq: 2452.00 MHz, Antenna: Aruba AB1, Power Setting: 12, Duty Cycle (%): 99

Measurement Distance: 3m

Sweep Time: 2.0 s

RBW: 1 MHz  
VBW: 3 MHz

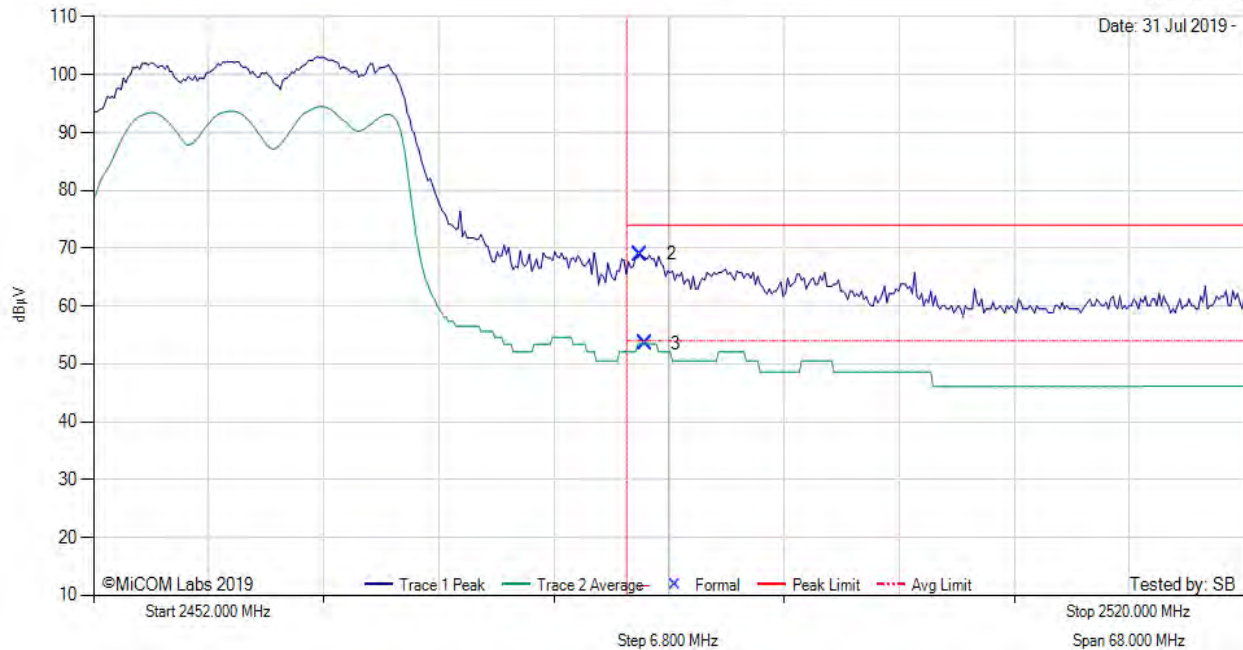

| 2452.00 - 2520.00 MHz |               |          |               |         |              |                  |            |        |         |              |           |            |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|------------|--------|---------|--------------|-----------|------------|
| Num                   | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol        | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 2                     | 2484.32       | 38.46    | -1.78         | 32.33   | 69.01        | Max Peak         | Horizontal | 156    | 11      | 74.0         | -5.0      | Pass       |
| 3                     | 2484.59       | 22.89    | -1.78         | 32.33   | 53.44        | Max Avg          | Horizontal | 156    | 11      | 54.0         | -0.6      | Pass       |
| 1                     | 2483.50       | --       | --            | --      | --           | Restricted-Band  | --         | --     | --      | --           | --        | --         |

[back to matrix](#)



575 Boulder Court  
Pleasanton, California 94566, USA  
Tel: +1 (925) 462 0304  
Fax: +1 (925) 462 0306  
[www.micomlabs.com](http://www.micomlabs.com)