


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVE


A

A

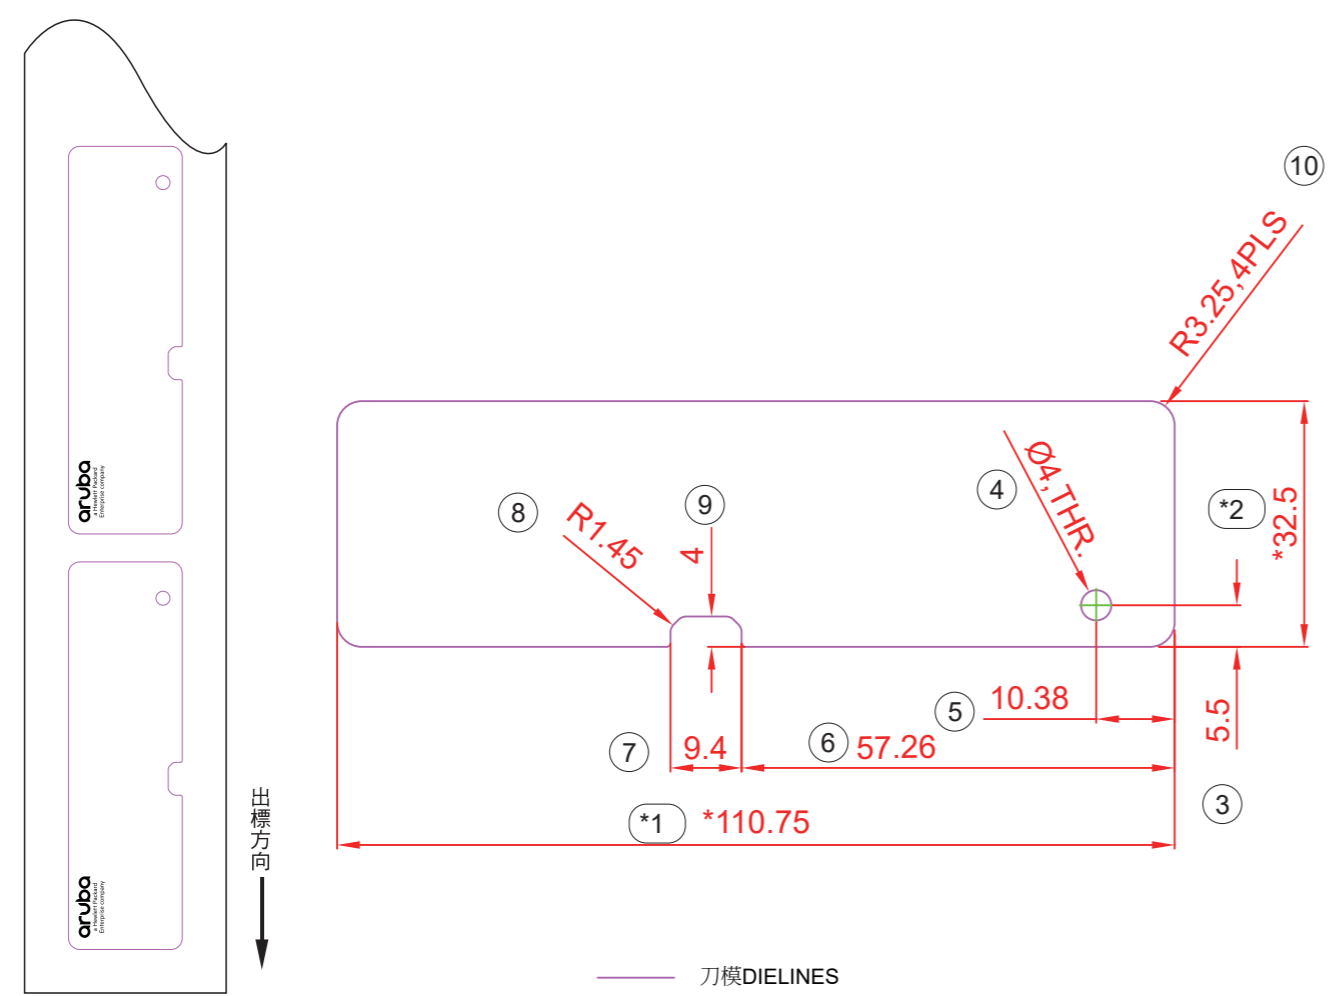

出標方向
↓

刀模DIELINES

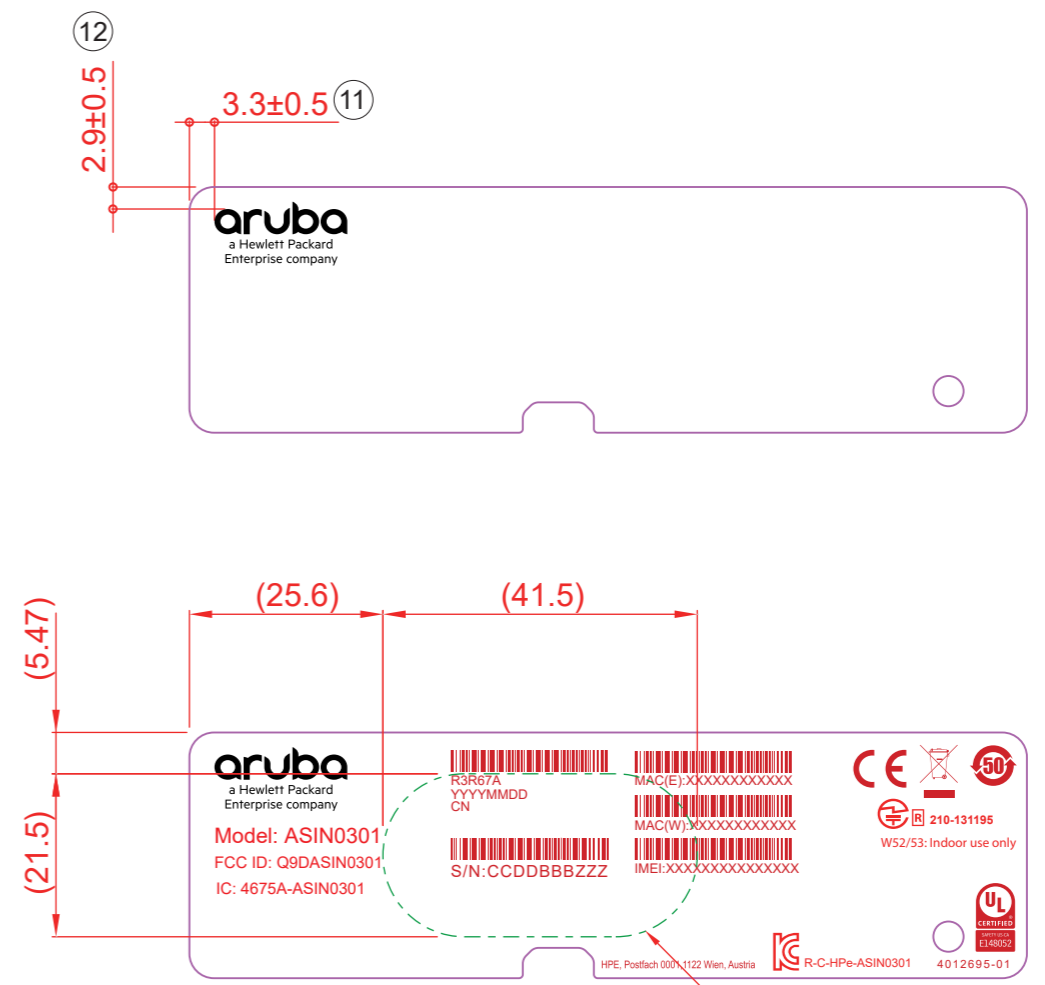

■ 紅字為線上列印, 實際內容需參照LABEL FORM (R10.7)
■ SN打印範圍參考

- NOTES:
- MATERIAL: WHITE PET, t=0.05, 金利寶HTYL50(EB)
ADHESIVE: 網紋背膠, t=0.035mm
FINISH: 上霧PET, T=0.025mm
 - COLOR:
 - 底色為BACKGROUND
 - 印刷PMS BLACK C
 - 刀模DIELINES — , 孔洞需排廢.
 - 捲狀出貨, 離型紙左右間距各3±0.5mm, 上下間距各3±0.3mm
 - TEMPERATURE RESISTANT= 120°C.
 - 被貼物: 鋁
 - 圖案印刷公差: 尺寸30mm以下~120mm為±0.3mm, 120~315mm為±0.5mm, 315以上±0.8mm
 - UL APPROVED, PGJ12
 - TEST REQUIREMENTS

TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	□□□□ ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5% is affected.

B

B

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE:		THIRD ANGLE PROJECTION		啟碁科技股份有限公司 Wistron NeWeb Corp. 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726	
INTEGRAL DIMENSIONS ± 0.2				DWG TITLE	
1 PLACE DECIMAL ± 0.2				SIZE	DWG NO.
ANGULAR DIMENSIONS ± 2°		DRAWN CATHY CHEN		A3	
HOLES UNDER Ø5.00 ± 0.2		ENGR CATHY CHEN		SCALE 1/1	
APVD EDWARD SU		06/24/19		SHEET 1 OF 1	