Safety Label Note:

1. Printing color:
   all text color: PANTONE Cool Gray 11C
   background color: Plastic-Aruba White
2. 製造國家(MFG Country):
   Decide by import and export country
   for example:
   1. MADE IN TAIWAN
   2. MADE IN CHINA

   製造工廠代號 (MFG Factory): (UL 要求標示)
   視代工廠而定 (Decide by MFG Factory)
   1.昊陽 / JoyTech (深圳/ ShenZhen) ----->None
   2.Accton---------->AC

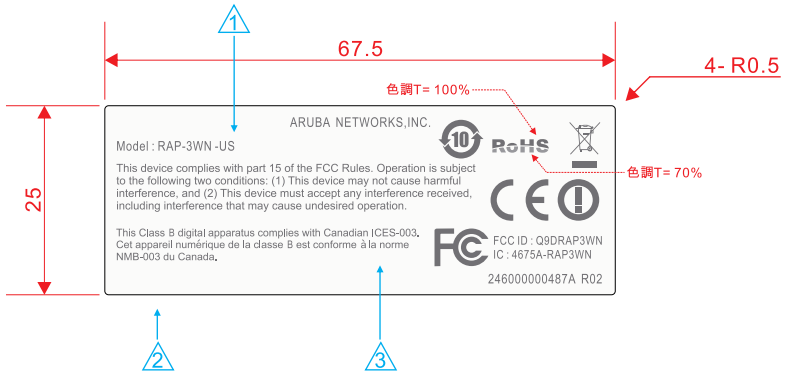

Modification

1	change "RAP-3WN -US"(Ver.2)
2	delete "Made in XXX."(Ver.2)
3	change "FCC Class B"Statement (Ver.2)
4	
5	
6	
7	

This document and the technical data disclosed are proprietary to Accton Tech. Corp. and shall not be duplicated, used, released, or disclosed without expressed written permission.

Card Paper / Top lineboard

Paper (GSM/g/m²)	CCNB	SBS	Double SBS
250			
280			
300			
310			
340			
350			
Coated	UV		UV Resistant Varnish
PP Film	LF / T= 0.15 mm		DF / T= 0.05 mm

Corrugate list

	Flute (A Degree)		Single wall/ Double wall GSM g/m² (Top liner/core/Medium/Bottom liner/board)			Bursting Strength kgf/cm²	End Crush Test kgf/cm
Yellow	A/C	Taiwan	230 X 180 X 230				
		China	250 X 150 X 250			16	33.6
	B	Taiwan	230 X 100 X 230				
		China	250 X 112 X 250			14	26.2
	E	Taiwan	230 X 100 X 230				
		China	250 X 100 X 250			14	22.5
	AB	Taiwan	230X100X100X100X230				
	BC	China	250X100X100X150X250			18	37.1
White	A/C	Taiwan	230 X 100 X 230				
		China	205 X 140 X 250			16	26
	B	Taiwan	220 X 100 X 200				
		China	175 X 140 X 230			14	28.5
	E	Taiwan	220 X 100 X 200				
		China	175 X 100 X 250			12	18.6
	AB	Taiwan	230X100X100X100X230			18	37.1
	BC	China	175X100X100X150X250				

Cardboard Die Cut Legend

(CL) Cutting Line
(CL) Crease Line
(PBL) Partial Blunt Line
(SO) Slit-Score Line
(SL) Slit Line
Flute Direction
Manufactory Stamp
Glue Joint

Unspecialized Die Cut Tolerance =+/-0.5mm

Dim. — GRADE	0	1	2	3	4	5
0 — 16	0.05	0.1	0.15	0.2	0.2	0.5
16 — 63	0.05	0.15	0.2	0.3	0.3	0.8
63 — 250	0.07	0.2	0.25	0.4	0.5	1.2
250 — 500	0.1	0.25	0.3	0.6	0.8	1.8
500 — 1000		0.3	0.5	0.8	1.2	3.0

Printing Tolerance = +/- mm

Pulp Tray Recycle Kraft 80% + Newspaper 20%

Weight/gs= +/-5%
Thickness/mm | T=5 | 2.0
Draft Angle 3° | Hydrous % | 7-11%

PE Bag (A Degree) | Clear | Pink

Normal (None Anti-Static)	Anti-Static	ESD Value/Ω/cm²	= 9-11
	Electronic	ESD Value/Ω/cm²	< 5
Thickness/mm	0.04	0.06	0.08
Bubble Bag (Bubble Ø=10mm)	Single layer	Put-in material >= 8 kg (By 1.5M / Width x 100M / Length)	
	Double layer	Put-in material >= 16 kg (By 1.5M / Width x 100M / Length)	

EPE Foam | White | Pink

Density (kg / m³)	>=27		Other
Laminated	Non - laminated		

Label list (Total Thickness = mm±10%)

Material & Thickness			Adhesive (Except all leds in FP label)	
Art paper		0.025mm / 25# / 1mil	Acrylic	T=0.022mm
Metalized	✓	0.050mm / 50# / 2mil	Acrylic UL approved	T=0.022mm
White Polyester	✓	0.076mm / 75# / 3mil	"R" Adhesive	T=0.022mm
(PP)Pepa paper		0.178mm / 7mil	Water Adhesive	T=0.022mm
PC 8B35		0.254mm / 10mil	3M 467	T=0.05mm / 2mil
PC 8010		0.381mm / 15mil	3M 468	T=0.127mm / 5mil
Other		0.500mm / 20mil	3M 7945	T=0.127mm / 5mil
PP Film	✓	LF (T = 0.045mm)	DF (T = 0.035mm)	

Comply with RoHs

Others

Material Spec:

IQC Inspect Color

Please refer to Plastic-Aruba White

Approve	Lin	03.02.12
Check		
Design	Show	03.02.12

Accton TECHNOLOGY CORP.

Part No. 246000000487A REV. 02

Description: AGENCY LABEL(WHITE)
EAP7041A-FLF-07 RAP-3WN LT

UNIT	SCALE 1 / 1	SIZE A3
MM / ~~IN~~	Outside View	Sheet 1 of 1