

EMI TEST REPORT

Test report No. : EMC- FCC- 0440

Type of equipment : Digital Audio Player

Model No. : EZMP-4200

FCC ID. : Q9JEZMP-4200

Applicant : EZMAX Co.,Ltd.

Test standards : FCC part 15 subpart B, Class B

Test Procedure and Items :

- AC Power Line Conducted Emissions Measurement: ANSI C63.4-1992
- Radiated Emissions Measurement : ANSI C63.4-1992

Test result : Complied

The above equipment was tested by EMC compliance Testing Laboratory for compliance with the requirements of FCC Rules and Regulations.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of test: 2005. 02. 28 Issued date: 2005 .03. 14

Tested by :  Approved by: 
PARK, SEUNG-SOO Chung, Min-Seok

EMC Compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO, KOREA
TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

[Contents]

1. Client information	3
2. Laboratory information.....	4
3. Test system configuration	5
3.1 Operation Environment.....	5
3.2 Measurement Uncertainty	5
3.3 Sample calculation	6
4. Description of E.U.T.	7
4.1 Product description	7
4.2 Peripherals	7
4.3 Operating conditions	8
4.4 Used cables	8
4.5 EUT test configuration	8
5. Summary of test results	9
5.1 Modification to the E.U.T.....	9
5.2 Standards & results.....	9
6. Test results	10
6.1 Conducted emission	10
6.1.1 Measurement procedure	10
6.1.2 Used equipments	10
6.1.3 Measurement uncertainty	10
6.1.4 Test data	11
6.1.5 Result	12
6.2 Radiated emission	13
6.2.1 Measurement procedure	13
6.2.2 Used equipments	13
6.2.3 Measurement uncertainty	13
6.2.4 Test data	14
6.2.5 Result	15
7. Test Graph	16

1. Client information

Applicant : EZMAX Co.,Ltd.

Address : #504 Hanlim HumanTower B/D1-40 Geumjeong-Dong
Gunpo city Kyunggi-D0, Korea

Telephone Number : +82-31-479-7184

Facsimile Number: +82-31-479-7188

Contact person : NAM HO HEE

Manufacturer : EZMAX Co.,Ltd.

Address : #504 Hanlim HumanTower B/D 1-40 Geumjeong-Dong
Gunpo city Kyunggi-D0, Korea

Telephone Number : +82-31-479-7184

Facsimile Number : +82-31-479-7188

EMC Compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO, KOREA
TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

2. Laboratory information

Address

EMC compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO, KOREA

Telephone Number : 82 31 336 9919


Facsimile Number : 82 31 336 4767

FCC Filing No. : 793334

VCCI Registration No. : C-1713, R-1606

KOLAS NO.: 231

SITE MAP

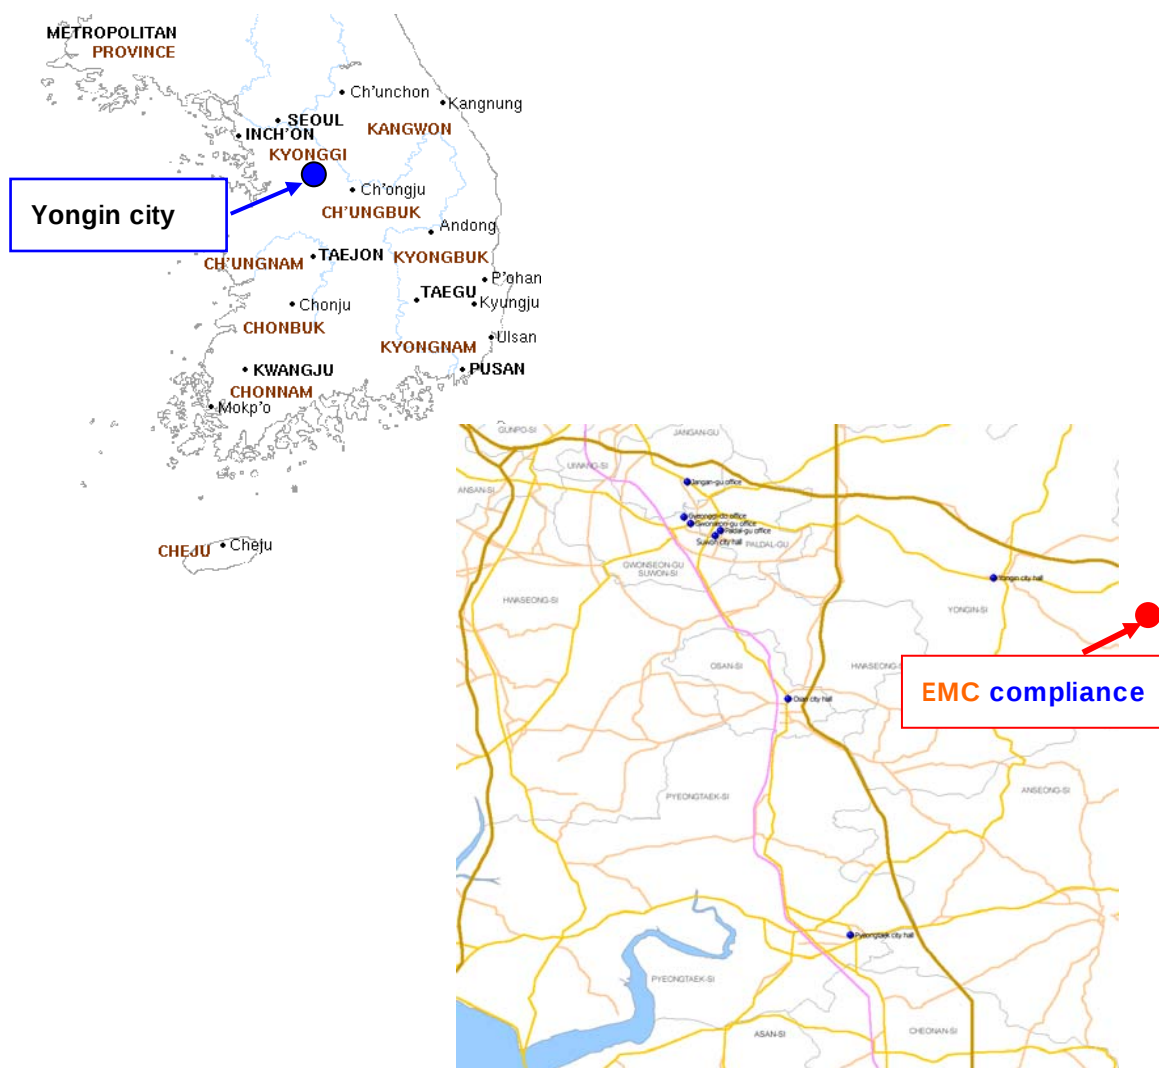

EMC Compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO, KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

3. Test system configuration

3.1 Operation Environment

	Temperature	Humidity	Pressure
OATS :	-2 °C	38 %	1005 hPa
Shielded room :	23 °C	32 %	1002 hPa

Test site

These testing were performed following locations;

Shielded room : Conducted emission

OATS (10m) : Radiated emission

3.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMI. The factors contributing to uncertainties are test receiver, Cable Loss, antenna factor calibration, Antenna directivity, antenna factor Variation with height, antenna phase center variation, antenna Frequency interpolation, measurement distance variation, Site imperfection, mismatching, and system repeatability.

Based on NIS 80, 81, the measurement uncertainty level with a 95% confidence level was applied.

3.3 Sample calculation

Conducted emission

The field strength is calculated by adding the LISN factor, cable loss to the measured reading.

The sample calculation is as follows :

$$FS = MR + LF + CL$$

MR = Meter Reading

LF = LISN Factor

CL = Cable Loss

If MR is 30dB, LISN Factor 1dB, CL 1dB

The result (MR) is

$$30 + 1 + 1 = 32\text{dBuV}$$

Radiated emission

The field strength is calculated adding the antenna Factor, cable loss and, Antenna pad adding, subtracting the amplifier gain from the measured reading.

The sample calculation is as follows :

$$FS = MR + AF + CL + AT - AG$$

MR = Meter Reading

AF = Antenna Factor

CL = Cable Loss

AP = Antenna Pad

AG=Amplifier Gain

If MR is 30dB, AF 12dB, CL 5dB, AP 10dB, AG 35dB

The result (MR) is

$$30 + 12 + 5 + 10 - 35 = 22\text{dBuV/m}$$

4. Description of E.U.T.

4.1 Product description

Applicant :	EZMAX Co.,Ltd.
Address of Applicant:	#504 Hanlim HumanTower B/D1-40 Geumjeong-Dong Gunpo city Kyunggi-D0, Korea
Manufacturer:	EZMAX Co.,Ltd.
Address of Manufacturer:	#504 Hanlim HumanTower B/D 1-40 Geumjeong-Dong Gunpo city Kyunggi-D0, Korea
Type of equipment:	Digital Audio Player
Basic Model:	EZMP-4200
Serial number:	N/A

4.2 Peripherals

Description	Model / Part #	Serial number	Manufacture
PC	EVO	6F28JYFZ7138	COMPAQ
PC	N/A	N/A	N/A
Monitor	GH15GS	N379HVEY216557V	SAMSUNG
Printer	EPSON STYLUS C60	DR5K014977	EPSON
Serial Mouse	Microsoft HOME	00489798	Microsoft Corp.
PS/2 Mouse	N/A	N/A	Microsoft Corp.
Headset	RP-HM211	N/A	PANASONIC
Keyboard	SEM-DT35	19019707	SAMSUNG


4.3 Operating conditions

Up & down load mode
Play mode
Recording mode
FM tuner mode

4.4 Used cables

Start		END		Cable Spec.	
Name	I / O Port	Name	I / O Port	Length	Shield
EUT	USB	PC	USB	1.2	Shield
	LINE-IN	PC	LINE-IN	1.0	Unshield
	Earphone	-	Open Cable	1.4	Unshield

4.5 EUT test configuration

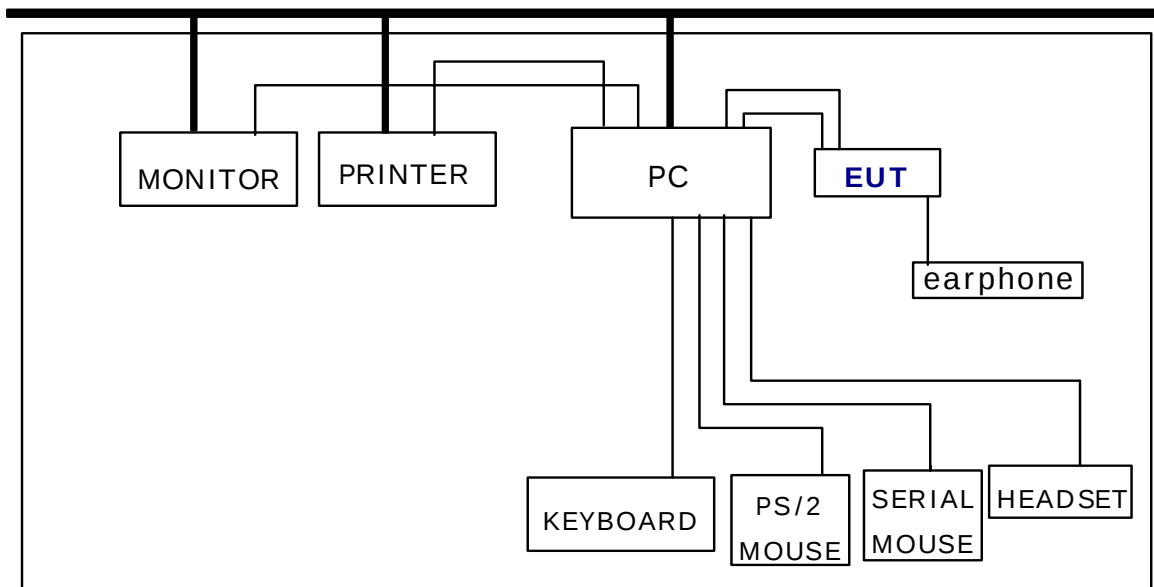

5. Summary of test results

5.1 Modification to the E.U.T.

None

5.2 Standards & results

FCC Part 15 Subpart B (Class B)

ANSI C63.4 – 1992

Test items	Test methods	Result
Conducted emission	ANSI C63.4-1992	Pass
Radiated emission	ANSI C63.4-1992	Pass

6. Test results

6.1 Conducted emission

6.1.1 Measurement procedure

Mains

The measurements were performed in a shielded room.

EUT was placed on a non-metallic table height of 0.8m above the reference ground plane.

The rear of tabletop was located 0.4m to the vertical conducted plane.

All other surfaces of tabletop were at least 0.8m away from any other grounded conducting surface.

They were folded back and forth forming a bundle 0.3m to 0.4m long and were hanged at a 0.4m height to the ground plane.

Each EUT power lead, except ground (safety) lead, was individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral were measured.

6.1.2 Used equipments

Equipment	Model	Serial no.	Makers	Next Cal. date	Used
Test receiver	ESHS10	843276/003	R&S	04.05.13	☒
L.I.S.N.	ESH3-Z5	100267	R&S	04.06.17	☒
	L3-32A	0120J20305	PMM	05.04.03	☒
Test site	Shield room	-	-	-	☒

6.1.3 Measurement uncertainty

Conducted emission measurement : ± 2.4 (K=2, 95%)

EMC Compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO, KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

6.1.4 Test data

[Recording mode]

Frequency	Correction		Line	Quasi-peak			Average		
	Factor			Limit	Reading	Result	Limit	Reading	Result
	[MHz]	LISN		Cable	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]
0.174	0.03	0.2	N	64.77	34.64	34.87	54.77	30.14	30.37
0.180	0.03	0.2	H	64.49	40.49	40.72	54.49	37.80	38.03
0.183	0.03	0.2	N	64.35	34.18	34.41	54.35	29.77	30.00
0.237	0.03	0.2	H	62.20	33.59	33.82	52.20	31.99	32.22
0.297	0.09	0.2	N	60.33	32.49	32.78	50.33	30.43	30.72
0.537	0.09	0.3	H	56.00	32.43	32.82	46.00	29.51	29.90
0.771	0.09	0.3	H	56.00	32.17	32.56	46.00	29.53	29.92
1.665	0.13	0.4	H	56.00	31.61	32.14	46.00	27.38	27.91
2.199	0.14	0.4	N	56.00	29.83	30.37	46.00	28.20	28.74
3.090	0.15	0.4	N	56.00	30.42	30.97	46.00	27.53	28.08
12.520	0.53	0.5	N	60.00	33.57	34.60	50.00	24.76	25.79
16.680	0.85	0.5	H	60.00	35.93	37.28	50.00	30.67	32.02
16.700	0.77	0.5	N	60.00	36.86	38.13	50.00	27.86	29.13
20.870	0.88	0.6	N	60.00	34.27	35.75	50.00	25.62	27.10

- Note. QP = Quasi-Peak, AV= Average / LINE(N) : NEUTRAL, LINE(H) : HOT
- Loss = LISN Loss + Cable Loss
- Measurement time : 1 s

[Up/Down mode]

Frequency [MHz]	Correction Factor		Line	Quasi-peak			Average		
				Limit	Reading	Result	Limit	Reading	Result
	LISN	Cable		[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]
0.177	0.03	0.2	N	64.63	37.70	37.93	54.63	35.23	35.46
0.180	0.03	0.2	H	64.49	40.35	40.58	54.49	38.27	38.50
0.195	0.03	0.2	N	63.82	27.38	27.61	53.82	22.43	22.66
0.240	0.03	0.2	H	62.10	31.49	31.72	52.10	30.21	30.44
0.297	0.08	0.2	H	60.33	34.86	35.14	50.33	34.02	34.30
0.534	0.09	0.3	H	56.00	29.43	29.82	46.00	28.60	28.99
0.951	0.10	0.3	H	56.00	28.44	28.84	46.00	26.80	27.20
1.188	0.11	0.4	H	56.00	29.11	29.62	46.00	27.38	27.89
1.779	0.14	0.4	N	56.00	28.45	28.99	46.00	25.36	25.90
2.019	0.14	0.4	N	56.00	28.93	29.47	46.00	27.97	28.51
12.500	0.61	0.5	H	60.00	32.84	33.95	50.00	30.96	32.07
12.600	0.53	0.5	N	60.00	24.96	25.99	50.00	18.76	19.79
16.660	0.77	0.5	N	60.00	35.41	36.68	50.00	30.10	31.37
16.670	0.85	0.5	H	60.00	37.16	38.51	50.00	33.70	35.05
20.840	0.94	0.6	H	60.00	36.30	37.84	50.00	31.49	33.03

- Note. QP = Quasi-Peak, AV= Average / LINE(N) : NEUTRAL, LINE(H) : HOT
- Loss = LISN Loss + Cable Loss
- Measurement time : 1 s

6.1.5 Result

Complied

EMC Compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO, KOREA
TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

6.2 Radiated emission

6.2.1 Measurement procedure

A pretest was performed at 3m distance in a semi-anechoic chamber for searching correct frequency. The final test was done at a 10m open area test site with a quasi-peak detector.

EUT was placed on a non-metallic table height of 0.8m above the reference ground plane.

They were folded back and forth forming a bundle 0.3m to 0.4m long and were hanged at a 0.4m height to the ground plane.

Cables connected to EUT were fixed to cause maximum emission.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

6.2.2 Used equipments

Equipment	Model no.	Serial no.	Makers	Next Cal. date	Used
Test receiver	ESVS 10	82786/006	R&S	04.05.13	☒
TRILOG Broadband Antenna	VULB 9160	3138	SCHWARZBECK	05.04.10	☒
Antenna Mast	A109	N/A	DEAIL	-	☒
Turn Table	TS14	N/A	DEAIL	-	☒
10m OATS	-	-	EMC Compliance	-	☒

6.2.3 Measurement uncertainty

Radiated Emission measurement : (K=2, 95%)

30-300 MHz : 3 m: ± 3.67 , 10 m: ± 4.4

300-1000 MHz ; 3 m: $+4.6/-2.92$, 10 m: $+2.94/-2.88$

EMC Compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO, KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

6.2.4 Test data

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	angle	Correction Factor		Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
					Antenna	Cable			
Recording mode									
150.68	11.6	H	3.2	269	13.17	2.10	30.0	26.83	3.17
664.82	8.2	H	1.2	349	20.17	5.74	37.0	34.11	2.89
94.94	16.5	H	4.0	85	8.92	1.58	30.0	27.00	3.00
Up/Down mode									
30.05	14.7	V	1.0	331	11.51	0.80	30.0	27.01	2.99
102.42	5.9	V	1.2	139	9.68	1.54	30.0	17.12	12.88
125.00	1.0	H	4.0	138	11.60	1.92	30.0	14.53	15.48
134.21	2.5	H	4.0	120	12.19	1.97	30.0	16.66	13.34
144.01	10.6	H	1.0	2.9	12.85	2.04	30.0	25.49	4.51
189.02	3.5	V	1.0	278	10.58	2.34	30.0	16.42	13.58
241.72	12.8	H	4.0	75	11.38	2.80	37.0	26.98	10.02
349.45	17.2	H	1.5	205	14.24	3.54	37.0	34.98	2.02
480.91	10.4	V	4.0	102	17.15	4.30	37.0	31.85	5.15
661.90	6.4	V	4.0	248	20.14	5.71	37.0	32.25	4.75
720.45	6.3	H	3.9	227	20.99	6.10	37.0	33.39	3.61
960.86	3.3	V	4.0	168	24.02	7.50	37.0	34.82	2.18
PLAY mode									
156.23	1.5	H	3.9	247	13.16	2.16	30.0	16.82	13.18
216.25	10.6	H	4.0	256	10.19	2.56	30.0	23.35	6.65
463.56	4.1	H	1.2	148	16.80	4.13	37.0	25.03	11.97

* Receiving Antenna Mode : *Horizontal, Vertical*

* 10 m OATS

* Note : Reading = Test Receiver meter,

P= Polarization → POL H = Horizontal, POL V = Vertical

* Result = Field Strength (Antenna factor + Cable factor + Reading)

EMC Compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO, KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

[TEST MODE: FM TUNER]

Tuned Frequency [MHz]	Local Oscillator	Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	angle	Correction Factor		Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
							Antenna	Cable			
87.5	Fundamental	98.20									
	Harmonics	196.40	18.9	H	4.0	284	10.67	1.58	43.5	31.15	12.35
98	Fundamental	108.70									
	Harmonics	217.40	14.3	H	4.0	335	10.70	1.77	46.0	26.77	19.23
108	Fundamental	118.70	11.4	V	3.9	116	11.64	1.26	43.5	24.30	19.20
	Harmonics	237.40	11.2	V	4.0	96	11.75	1.88	46.0	24.83	21.17
			356.10	9.0	V	3.9	312	14.33	2.56	46.0	25.89
OTHER		216.89	20.3	V	4.0	112	10.68	1.76	46.0	32.74	13.26
		373.95	11.8	V	4.0	212	14.71	2.66	46.0	29.17	16.83

* Receiving Antenna Mode : *Horizontal, Vertical*

* 3 m OATS

* Note : Reading = Test Receiver meter,

P = Polarization → POL H = Horizontal, POL V = Vertical

* Result = Field Strength (Antenna factor + Cable factor + Reading)

6.2.5 Result

Complied

7. Test Graph

Conducted Emission test graph

[Recording Mode]


EUT: EZMP-4200
Manuf: EZMAX
Op Cond: H
Operator:
Test Spec: EN5022 Class B Conducted Emission
Comment:

Result File: 502084rh.dat : EZMAX_EZMP-4200

Scan Settings (2 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	3MHz	3kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
3MHz	30MHz	10kHz	10kHz	PK+AV	5msec	Auto	OFF	60dB

Final Measurement: Detectors: X QP / + AV
Meas Time: 1sec
Peaks: 8
Acc Margin: 25 dB

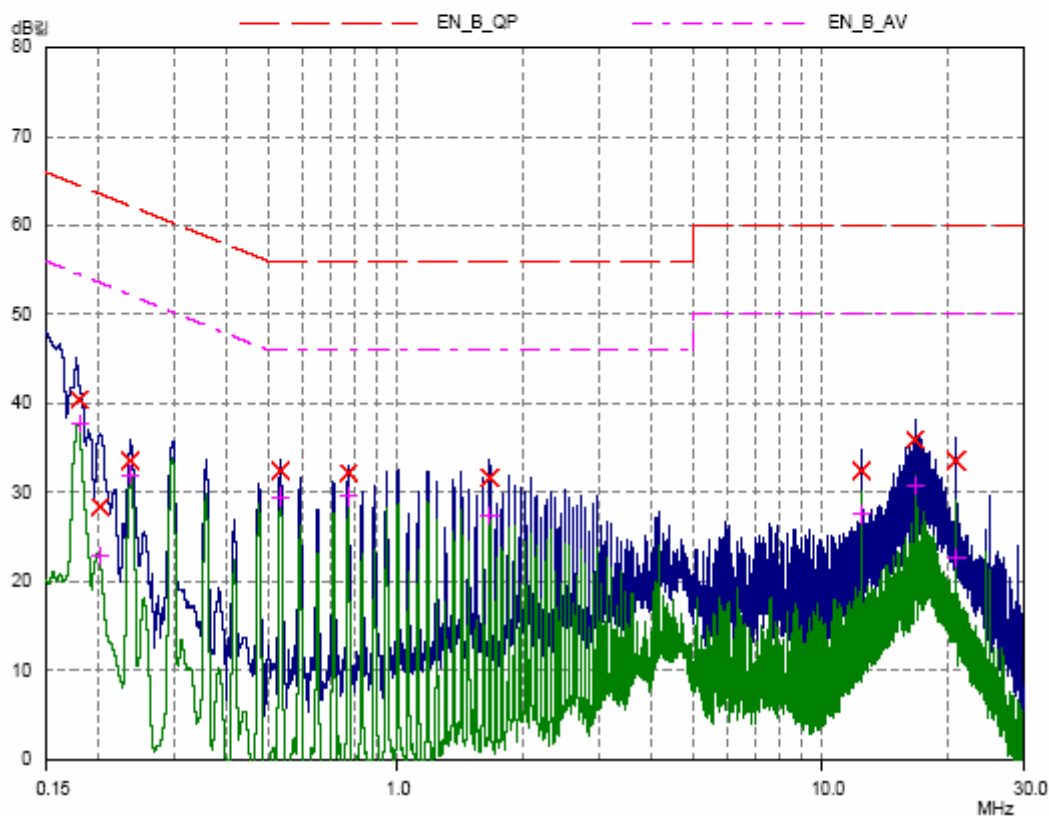

EMC Compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO, KOREA

TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.


EUT: EZMP-4200
Manuf: EZMAX
Op Cond: N
Operator:
Test Spec: EN55022 Class B Conducted Emission
Comment:

Result File: 502084m.dat : EZMAX_EZMP-4200

Scan Settings (2 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	3MHz	3kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
3MHz	30MHz	10kHz	10kHz	PK+AV	5msec	Auto	OFF	60dB

Final Measurement: Detectors: X QP / + AV
Meas Time: 1sec
Peaks: 8
Acc Margin: 25 dB

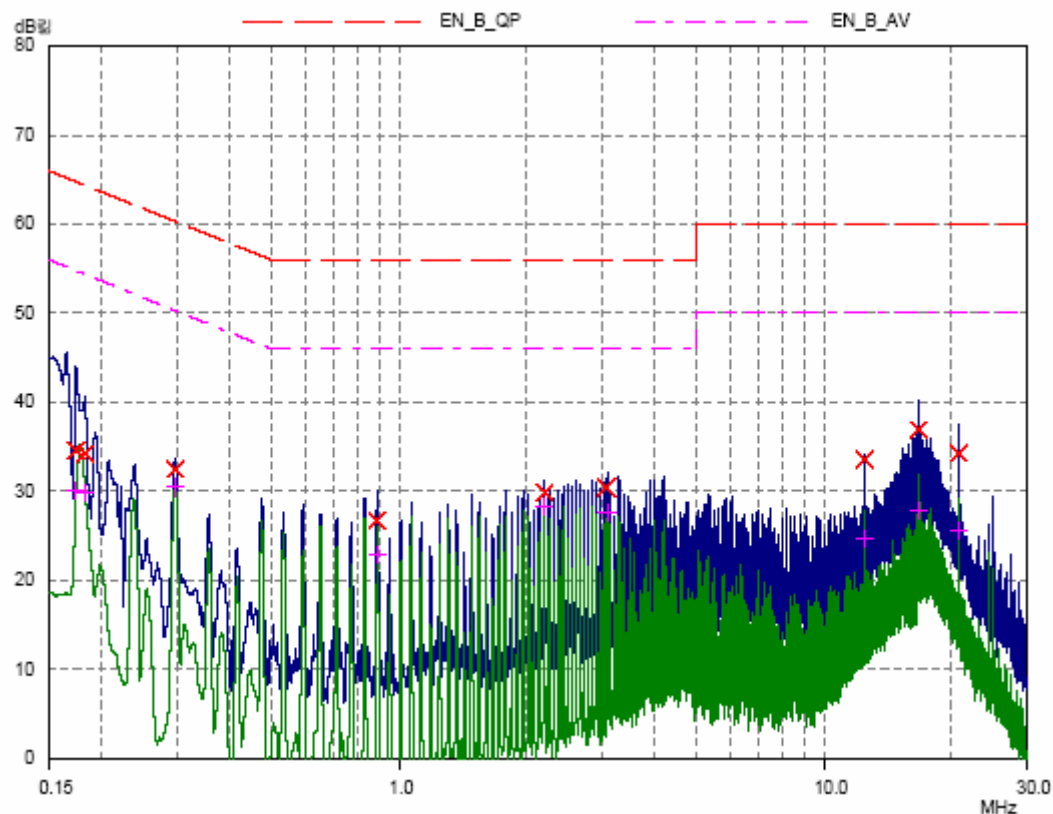

[Up/Down Mode]


EUT: EZMP-4200
Manuf: EZMAX
Op Cond: H
Operator:
Test Spec: EN55022 Class B Conducted Emission
Comment:

Result File: 0502084h.dat : EZMAX_EZMP-4200

Scan Settings (2 Ranges)

Frequencies			Receiver Settings						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
150kHz	3MHz	3kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB	
3MHz	30MHz	10kHz	10kHz	PK+AV	5msec	Auto	OFF	60dB	

Final Measurement: Detectors: X QP / + AV
Meas Time: 1sec
Peaks: 8
Acc Margin: 25 dB

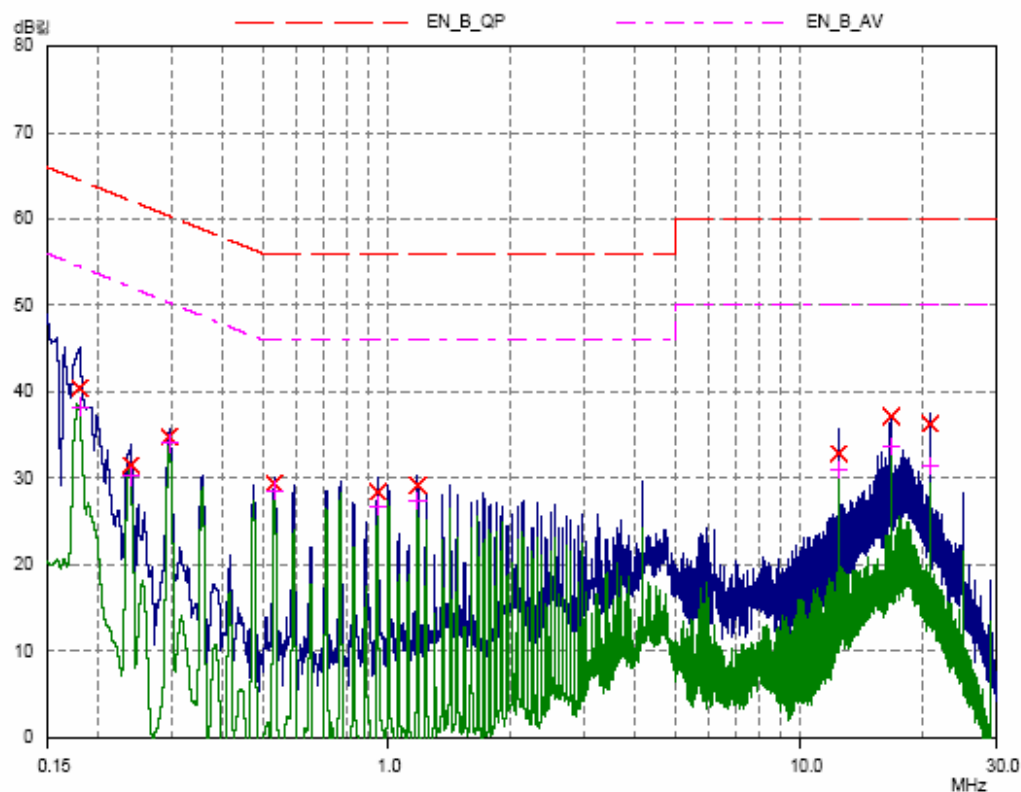

EMC Compliance Ltd.

82-1, JEIL-RI, YANGJI-MYUN, YONGIN-CITY, KYUNGGI-DO, KOREA
TEL: 82 31 336 9919 FAX : 82 31 336 4767

This test report shall not be reproduced except in full, Without the written approval.

EUT: EZMP-4200
Manuf: EZMAX
Op Cond: N
Operator:
Test Spec: EN55022 Class B Conducted Emission
Comment:

Result File: 0502084n.dat : EZMAX_EZMP-4200

Scan Settings		(2 Ranges)		Receiver Settings				
		Frequencies						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	3MHz	3kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
3MHz	30MHz	10kHz	10kHz	PK+AV	5msec	Auto	OFF	60dB

Final Measurement: Detectors: X QP / + AV
Meas Time: 1sec
Peaks: 8
Acc Margin: 25 dB

