





ISO/IEC17025Accredited Lab.

Report No: FCC 0908119
File reference No: 2009-10-27

Applicant: Grand Hall Enterprise Co.,Ltd.

Product: 2.4GHz wireless outdoor speaker

Model No: 001

Trademark: grandhall

Test Standards: FCC Part 15 Subpart C, Paragraph 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C, Paragraph 15.247 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung Manager

Dated: Oct 27,2009

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District, Shenzhen,CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0908119 Page 2 of 48

Date: 2009-10-27



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Page 3 of 48

Report No: 0908119 Date: 2009-10-27



Test Report Conclusion Content

1.0	General Details	3
1.1	Test Lab Details.	3
1.2	Applicant Details	3
1.3	Description of EUT	3
1.4	Submitted Sample	3
1.5	Test Duration.	4
1.6	Test Uncertainty	4
1.7	Test By	4
2.0	List of Measurement Equipment	4
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test	8
5.2	Test Method and Test Procedure	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition	9
5.5	Conducted Emission Limit	9
5.6	Test Result	9
6.0	Radiated Emission test	12
5.1	Test Method and Test Procedure	12
5.2	Configuration of the EUT	12
5.3	EUT Operation Condition.	12
5.4	Radiated Emission Limit	13
7.0	6dB Bandwidth Measurement	28
8.0	Maximum Peak Output Power	32
9.0	Power Spectral Density Measurement	33
10.0	Out of Band Measurement	37
11.0	Antenna Requirement	40
12.0	Maximum Permissible Exposure	41
13.0	FCC and IC ID Label	43
14 0	Photo of Test Setup and EUT View	44

Report No: 0908119 Page 4 of 48

Date: 2009-10-27



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-01

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Grand Hall Enterprise Co., Ltd

Address: 9th Floor, No.298, Rueiguang Road Neihu, Taipei, 114, Taiwan

Telephone: +886-2-26591119 Fax: +886-2-26590886

1.3 Description of EUT

Product: 2.4GHz wireless outdoor speaker

Manufacturer: Aulong Technology Company Limited

Brand Name: grandhall
Model Number: 001
Additional Model Name N/A
Additional Trade Name N/A

Rating: DC6V (4 pcs AA Batteries) or powered by PC (Through USB)

Type of Modulation GFSK

Frequency range 2406-2472MHz

Number of Channel 34

Antenna type A permanent fixed antenna, PIPF Antenna

1.4 Submitted Sample: 3 Sample

1.5 Test Duration

2009-08-18 to 2009-10-27

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 5 of 48

Report No: 0908119 Date: 2009-10-27

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer &verify Engineer

Test Engineer

The sample(s) tested by

Henry Ding

Temy Tang

Print Name: Henry Ding/Engineer

Verify Engineer

The report verified by

Print Name: Terry Tang/ EMC Manager

2.0		Test Equi	nmonts		
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2008-12-06	2009-12-05
Absorbing Clamp	ROHDE&SCHWARZ	MDS-21	100126	2008-12-06	2009-12-05
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2008-12-06	2009-12-05
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2008-12-06	2009-12-05
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2008-12-06	2009-12-05
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2009-04-26	2010-04-25
4-WIRE ISN	ROHDE&SCHWARZ	ENY 41	830663/044	2009-02-18	2010-02-17
GG ENY22 Double 2-Wire ISN	ROHDE&SCHWARZ	ENY22	83066/016	2009-02-18	2010-02-17
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2009-02-18	2010-02-17
System Controller	CT	SC100	-	2009-02-18	2010-02-17
Printer	EPSON	РНОТО ЕХЗ	CFNH234850	2009-02-18	2010-02-17
FM-AM Signal Generator	JUNG.JIN	SG-150M	389911177	2009-02-18	2010-02-17

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 6 of 48

Report No: 0908119 Date: 2009-10-27

		12/	8		
Color TV Pattern Generator	PHILIPS	PM5418	LO621747	2009-02-18	2010-02-17
Computer	IBM	8434	1S8434KCE99BLX LO*	-	-
Oscillator	KENWOOD	AG-203D	3070002	2009-02-18	2010-02-17
Power meter	Anritsu	ML2487A	6K00003613	2009-02-18	2010-02-17
Power sensor	Anritsu	MA2491A	32263	2009-02-18	2010-02-17
Spectrum Analyzer	HAMEG	HM5012	-	2009-04-26	2010-04-25
Power Supply	LW	APS1502	-	-	-
5K VA AC Power Source	California Instruments	5001iX	56060	2009-02-18	2010-02-17
CDN	EM TEST	CDN M2/M3	-	2009-02-18	2010-02-17
Attenuation	EM TEST	ATT6/75	-	2009-02-18	2010-02-17
Resistance	EM TEST	R100	-	2009-02-18	2010-02-17
Electromagnetic Injection Clamp	LITTHI	EM101	35708	2009-02-18	2010-02-17
Signal Generator	ROHDE&SCHWARZ	SMT03	100029	2009-02-18	2010-02-17
Power Amplifier	AR	150W1000	300999	2009-02-18	2010-02-17
Field probe	Holaday	HI-6005	105152	2009-02-18	2010-02-17
Bilog Antenna	Chase	CBL6111C	2576	2009-02-18	2010-02-17
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2009-02-18	2010-02-17
3m OATS			N/A	2009-02-18	2010-02-17
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2009-08-18	2010-08-17
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2009-04-26	2010-04-25

Page 7 of 48

Report No: 0908119 Date: 2009-10-27



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested	l according to th	ne following :	specifications:
-------------------------	-------------------	----------------	-----------------

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(c)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies


3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247


4.0 EUT Modification

No modification by Shenzhen Timeway Technology Consulting Co.,Ltd

Page 8 of 48

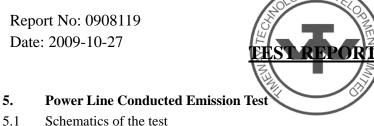

5.

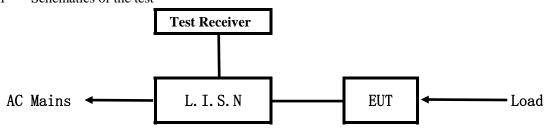


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 -2003.

Block diagram of Test setup

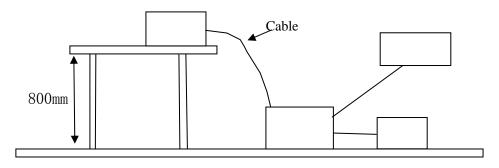

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. **EUT**

Device	Manufacturer	Model	FCC ID
2.4G wireless	Aulong Technology Company Limited	001	Q9K09GH001
outdoor			
speaker			

В. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 9 of 48

Report No: 0908119 Date: 2009-10-27

		\%\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	
Device	Manufacturer	Model FCC ID/DOC	Cable
N/A			

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

<u> </u>					
Frequency	Class A Lim	its (dB \mu V)	Class B Lim	nits (dB \mu V)	
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
5.00 ~ 30.00	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.


Report No: 0908119 Date: 2009-10-27

A Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Transmitting mode

Results: Pass

Test Voltage 120V~,60Hz Please refer to following diagram for individual

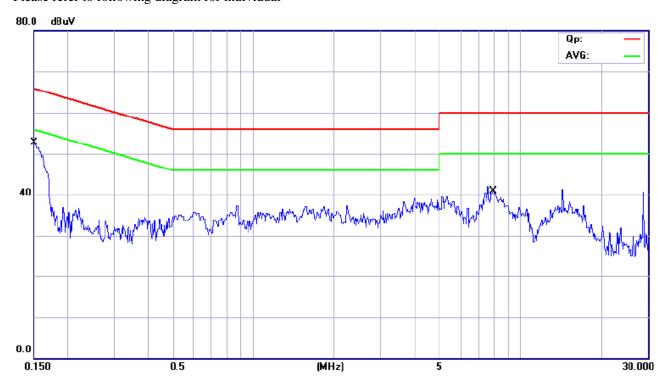

Engguenav		Reading	Limi	t		
Frequency (MHz)	Neutr	utral		Line		V)
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.1503	52.60	47.50			65.98	55.98
7.9492	35.46	28.46			60.00	50.00


Date: 2009-10-27

B Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Transmitting mode

Results: Pass

Test Voltage 120V~,60Hz

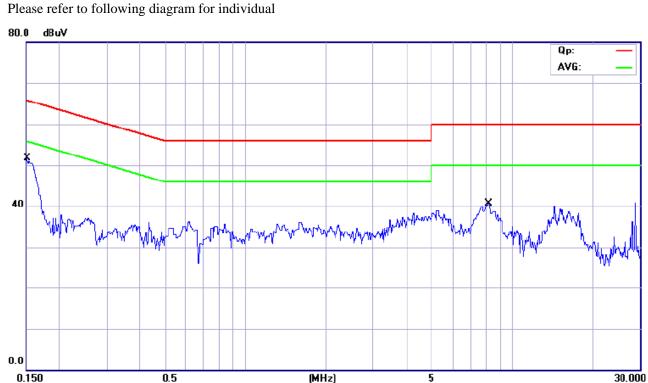

Frequency (MHz)	Reading(dB µ V)				Limi	t
	Neutr	al	Line	2	(dB μ)	V)
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.1520			51.40	47.00	65.89	55.89
8.1505			35.28	28.38	60.00	50.00

Page 12 of 48

Report No: 0908119 Date: 2009-10-27



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization : Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre -Amplifier EUT Turn-table Receiver

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition

 Same as section 5.4 of this report.

Report No: 0908119 Page 13 of 48

Date: 2009-10-27



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and RSS-210

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

Report No: 0908119 Page 14 of 48

Date: 2009-10-27



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Tx under transmitting mode


Results: Pass Model: 001

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
72.00	36.57	V	40.00
120.00	35.32	V	43.50
500.00	37.26	V	46.00
72.04	38.84	Н	40.00
120.00	32.99	Н	43.50
168.00	34.90	Н	43.50

Report No: 0908119 Date: 2009-10-27




Test Figure: transmitting mode

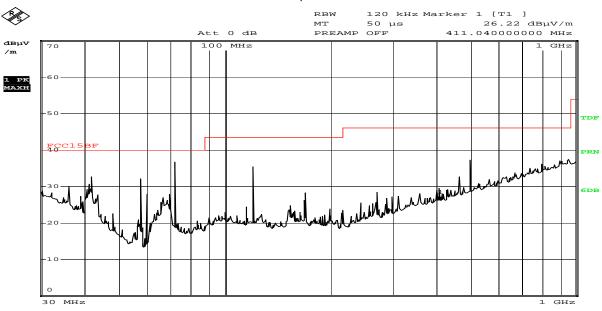

Date: 28.SEP.2009 17:41:27



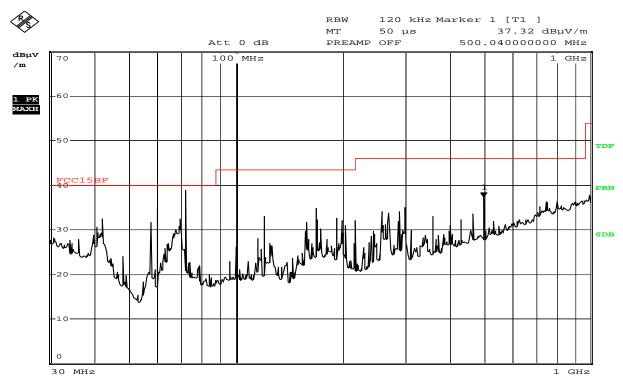

Date: 28.SEP.2009 17:43:56

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 0908119 Page 16 of 48

Date: 2009-10-27



Test Figure: transmitting mode

Operation Mode: Transmitting under Low Channel

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
	` ´		Emit@3m (dB # v/m)
2406.00	93.6 (PK) /78.3 (AV)	Н	Fundamental Frequency
2406.00	99.3 (PK) /83.5 (AV)	V	Tundamental Trequency
4812.00		Н	74(Peak)/ 54(AV)
4812.00	51.03 (PK)	V	74(Peak)/ 54(AV
7218		H/V	74(Peak)/ 54(AV)
9624	-1	H/V	74(Peak)/ 54(AV)
12030		H/V	74(Peak)/ 54(AV)
14436		H/V	74(Peak)/ 54(AV)
16842		H/V	74(Peak)/ 54(AV)
19248		H/V	74(Peak)/ 54(AV)
21654		H/V	74(Peak)/ 54(AV)
24060		H/V	74(Peak)/ 54(AV)

Operation Mode: Transmitting under CH Mid

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB μ V/m)
2438.00	91.1 (PK) /76.2 (AV)	Н	Fundamental Frequency
2438.00	98.6 (PK) /83.2 (AV)	V	Fundamental Frequency
4876.00	50.7 (PK)	V	74(Peak)/ 54(AV)
4876.00		Н	74(Peak)/ 54(AV)
7314.00		H/V	74(Peak)/ 54(AV)
9752.00		H/V	74(Peak)/ 54(AV)
12190		H/V	74(Peak)/ 54(AV)
14628		H/V	74(Peak)/ 54(AV)
17066		H/V	74(Peak)/ 54(AV)
19504		H/V	74(Peak)/ 54(AV)
21942		H/V	74(Peak)/ 54(AV)
24380		H/V	74(Peak)/ 54(AV)

Report No: 0908119 Page 17 of 48


Date: 2009-10-27


Operation Mode: Transmitting under CH—High							
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)				
2472.00	90.3 (PK) /75.3 (AV)	Н	Fundamental Frequency				
2472.00	96.3 (PK) /81.6 (AV)	V	Tundamental Trequency				
4944.00		V	74(Peak)/ 54(AV)				
4944.00		Н	74(Peak)/ 54(AV)				
7416		H/V	74(Peak)/ 54(AV)				
9888		H/V	74(Peak)/ 54(AV)				
12360		H/V	74(Peak)/ 54(AV)				
14832		H/V	74(Peak)/ 54(AV)				
17304		H/V	74(Peak)/ 54(AV)				
19776		H/V	74(Peak)/ 54(AV)				
22248		H/V	74(Peak)/ 54(AV)				
24720		H/V	74(Peak)/ 54(AV)				

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. Margin=Emission-Limits
- 4. According to section 15.35(b), the peak limit is 20dB higher than the average limit

Report No: 0908119

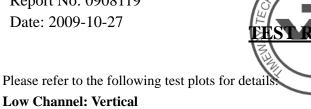

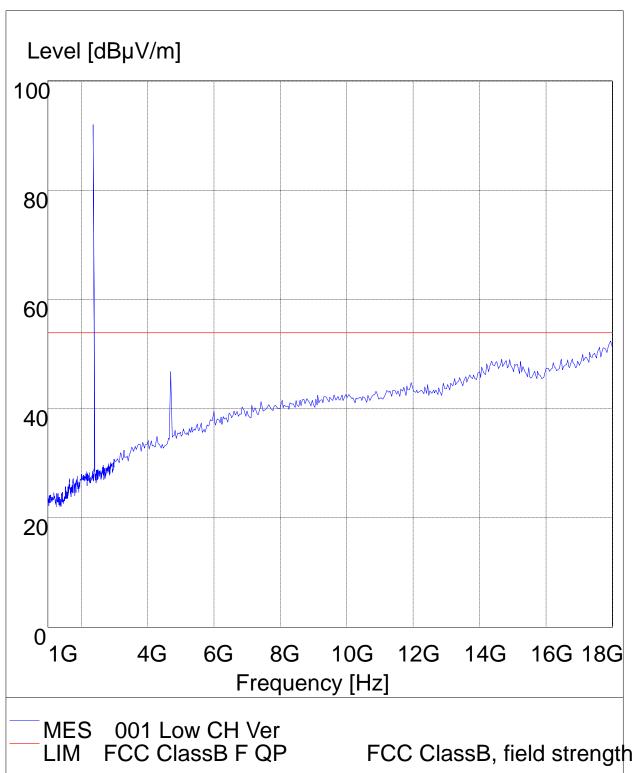

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 19 of 48

Report No: 0908119 Date: 2009-10-27



Low Channel: Horizontal

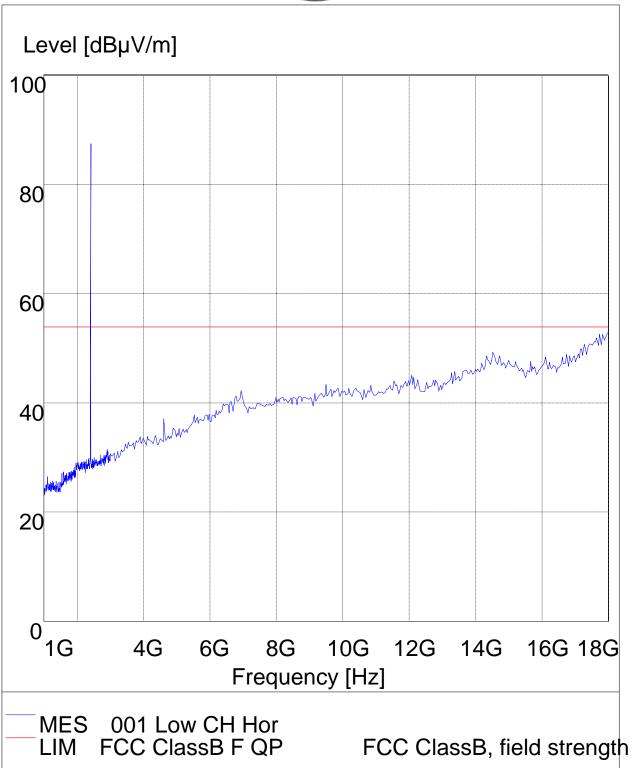


Page 20 of 48

Report No: 0908119 Date: 2009-10-27



Middle Channel: Horizontal

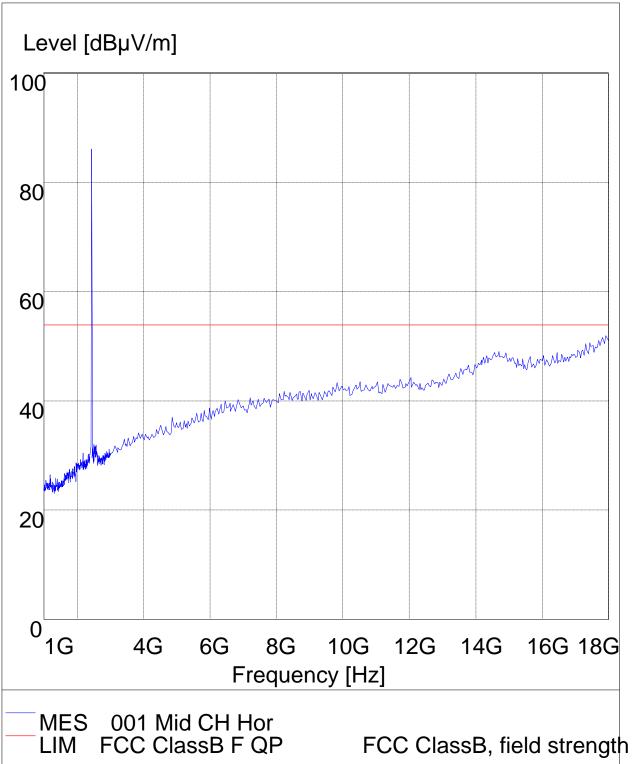


Page 21 of 48

Report No: 0908119 Date: 2009-10-27



Middle Channel: Vertical

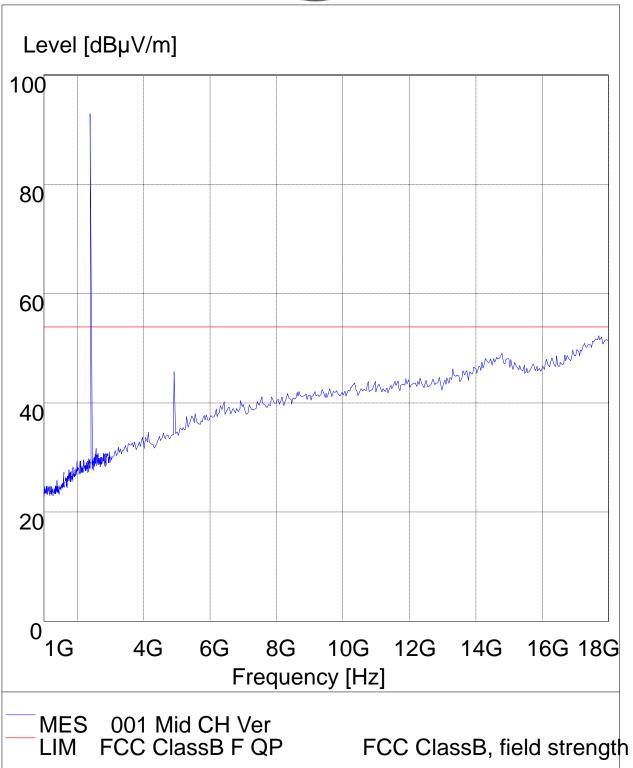


Page 22 of 48

Report No: 0908119 Date: 2009-10-27



High Channel: Horizontal

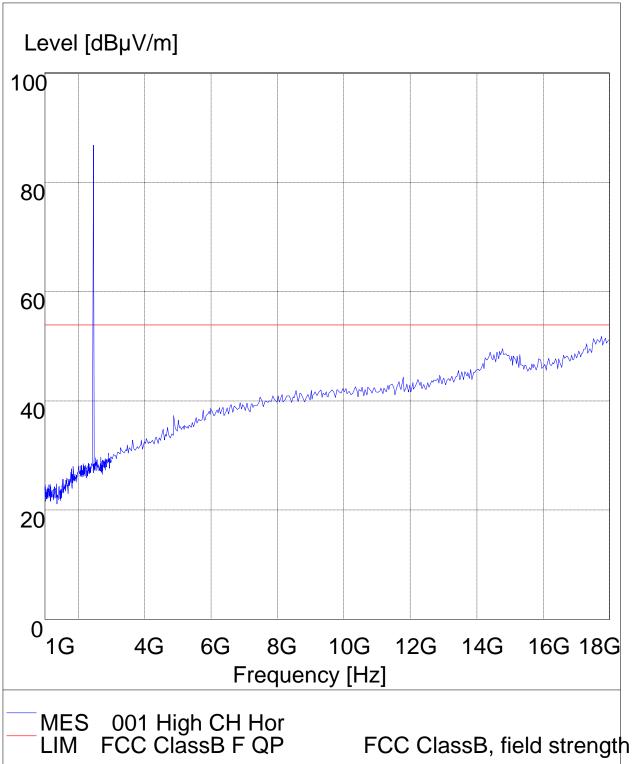


Page 23 of 48

Report No: 0908119 Date: 2009-10-27




High Channel: Vertical

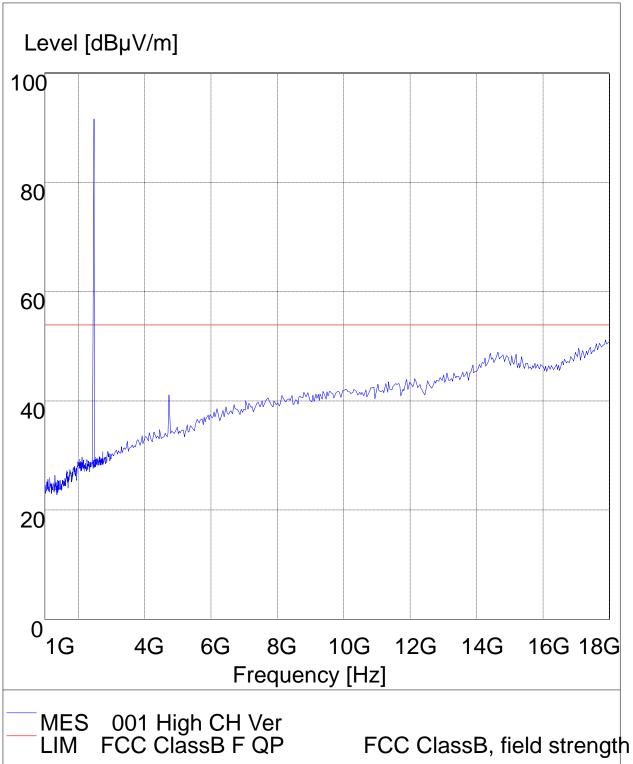

Report No: 0908119 Date: 2009-10-27




18-25G CH High Horizontal

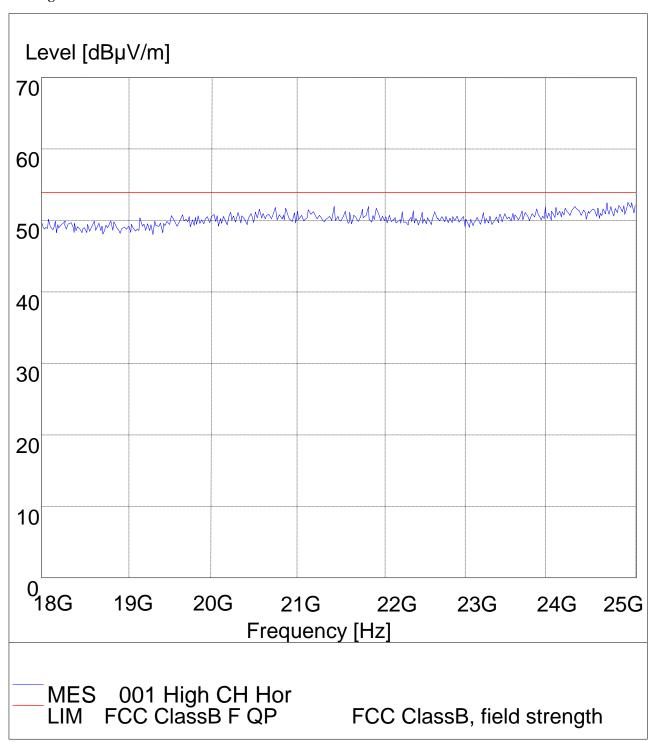

Report No: 0908119 Date: 2009-10-27



18-25G CH High Vertical

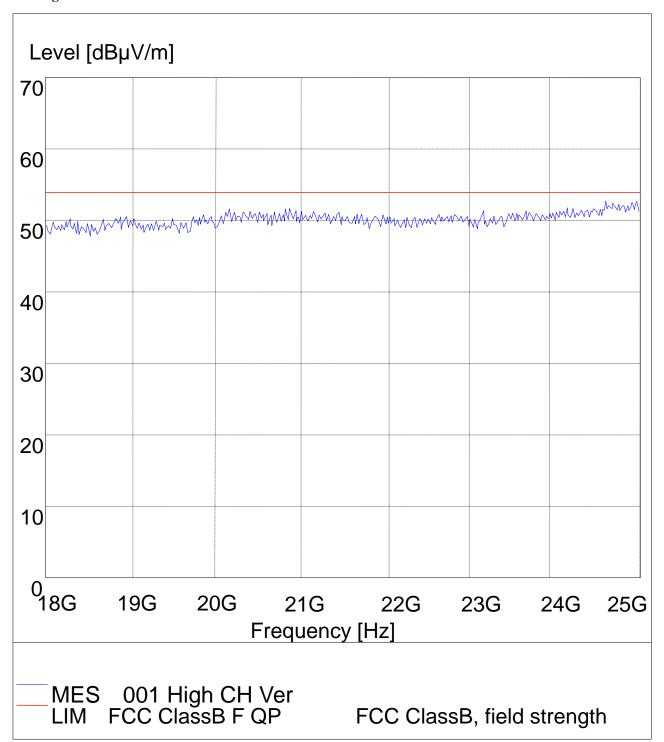

Page 26 of 48


Date: 2009-10-27

Report No: 0908119



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500KHz

7.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator.

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 100 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

7.4 Test Result

EUT		2.4G wireless outdoor speaker		Model		001		
Mode		Keep '	Transmitting	Input Vo	Voltage DC		6V	
Temperat	ure	24	4 deg. C,	Humidity		56%]	RH	
Channel		el Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail	
Low		2406	0.858			0.5	Pass	
Mid		2438 0.				0.5	Pass	
High		2472	0.850			0.5	Pass	


Page 27 of 48

Report No: 0908119 Date: 2009-10-27



Test Plots:

1. CH Low

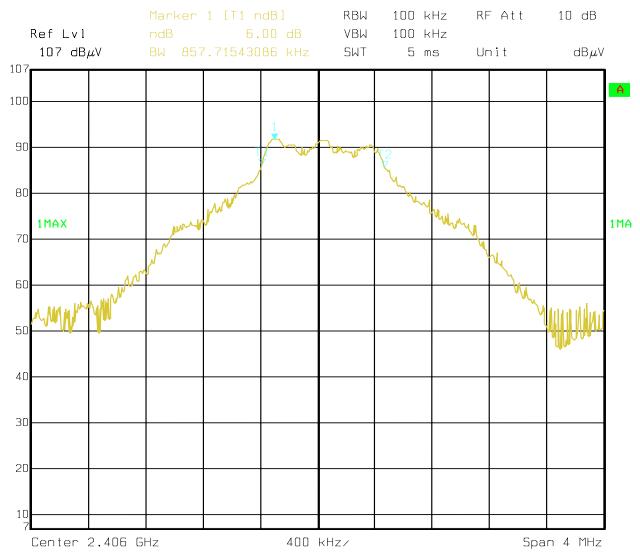


Date: 19.AUG.2009 16:52:00

Page 28 of 48

Report No: 0908119 Date: 2009-10-27



2. CH Mid

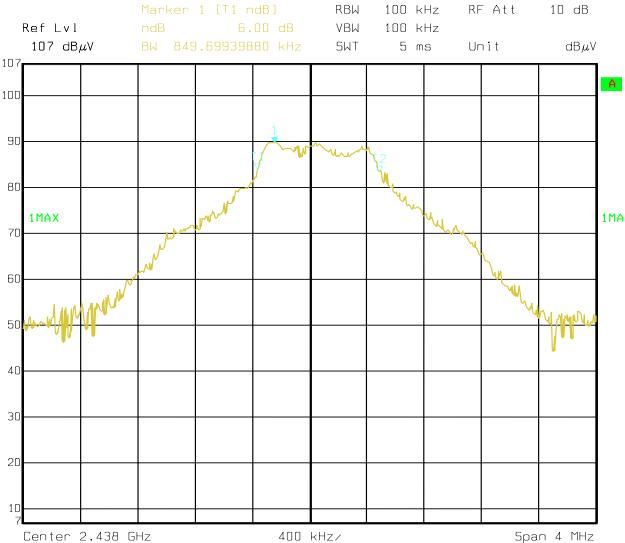


Date: 19.AUG.2009 16:31:24

Page 29 of 48

Report No: 0908119 Date: 2009-10-27



3. CH High

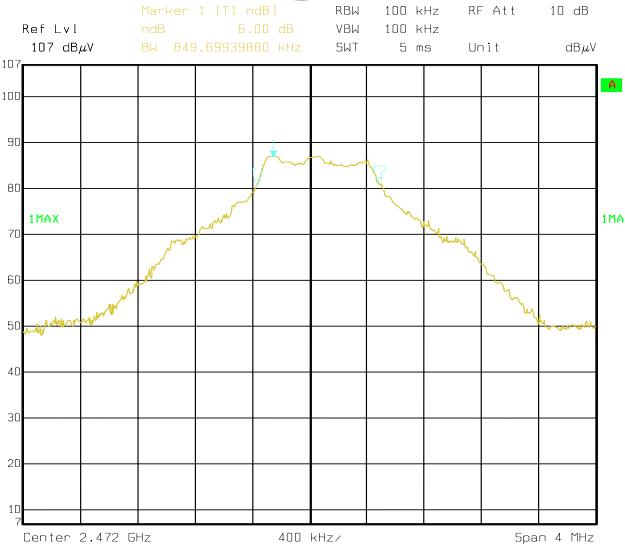

Date: 19.AUG.2009 16:27:20


Page 30 of 48

Report No: 0908119 Date: 2009-10-27



8. Maximum Peak Output Power

8.1 Test Setup



8.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

8.4Test Results


EUT		2.4G wireless ou	ıtdoor speaker	er Model		001			
Mode		Keep Tran	smitting Input Voltage		Input Voltage		t Voltage I		OC 6V
Temperature	e	24 deg	. C, Humidity		ity	56% RH			
Channel	Cha	annel Frequency (MHz)	Peak Power Output (dBm)		Peak Power Limit (dBm)		Pass/ Fail		
Low		2406	14.41		30)	Pass		
Mid		2438	14.50		30)	Pass		
High		2472	14.42	•	30)	Pass		


Note: 1. At finial test to get the worst-case emission for CH Low, CH Mid and CH High

2. The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

Report No: 0908119 Page 31 of 48

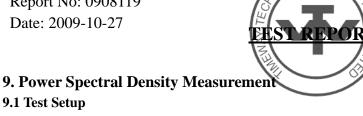



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3KHz RBW and 10kHz VBW, set sweep time=500s

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.

9.4Test Result

EUT		2.4G wireless ou	ıtdoor speaker	Model		001			
Mode		Keep Tran	smitting Input Volta		Input Voltage		oltage DC 6V		OC 6V
Temperature	e	24 deg	. C, Humidity		56% RH				
Channel	Ch	annel Frequency (MHz)	Final RF Power Level in 3kHz BW (dBm)		Maximum Limit (dBm)		Pass/ Fail		
Low		2406	-9.88		8		Pass		
Mid		2438	-8.19		8		Pass		
High		2472	-9.67	8			Pass		


Note: At finial test to get the worst-case emission for CH Low, CH Mid and CH High

Report No: 0908119 Page 32 of 48

Date: 2009-10-27

9.5Photo of Power Spectral Density Measurement

1.CH Low

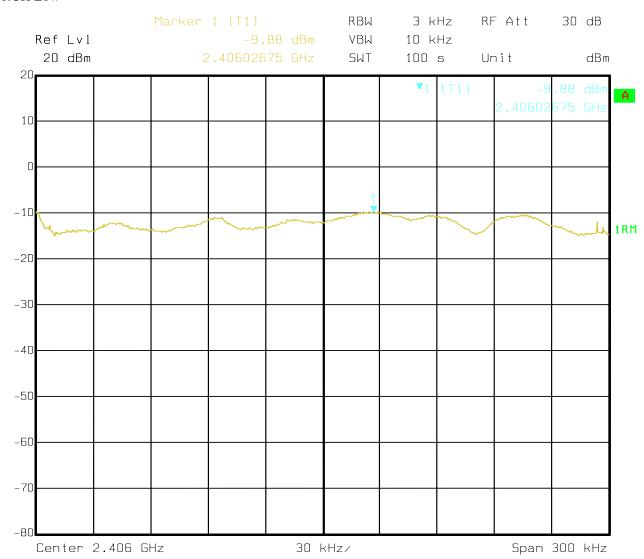


Date: 31.0CT.2009 19:41:48

Page 33 of 48

Report No: 0908119 Date: 2009-10-27



2. CH Mid

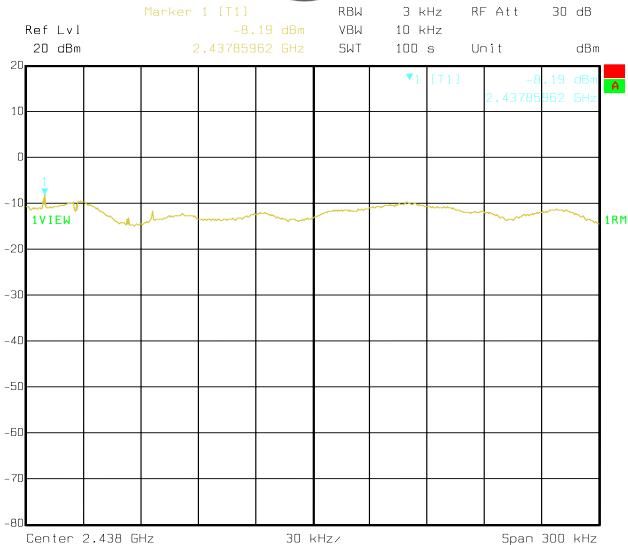


Date: 31.0CT.2009 19:13:43

Page 34 of 48

Report No: 0908119 Date: 2009-10-27



3. CH High

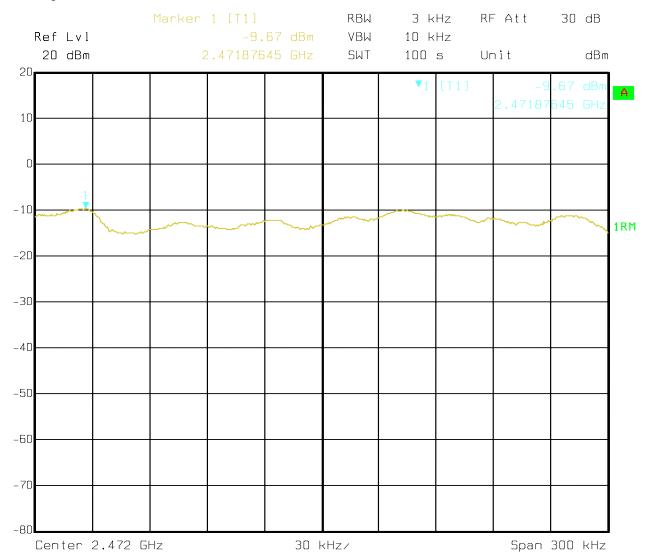


Date: 31.0CT.2009 19:44:43

Page 35 of 48

Report No: 0908119 Date: 2009-10-27



10 Out of Band Measurement 10.1 Test Setup



10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was applied to the average and peak filed strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

The spectrum plots (Peak RBW=VBW=1MHz; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

Page 36 of 48

Report No: 0908119 Date: 2009-10-27




10.4Test Result

CH Low

10.4 Out of Band Test Result

Product:	2.4G wireless outdoor speaker		Test Mode:	CH Low
Mode	Keep Transmitting		Input Voltage	DC 6V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBµV/m)	48.2(PK)(V)	Limit	$74(dB\mu V/m)$
Restrict Band	PK (dBμV/m)	43.6(PK)(H)	Lillill	$54(dB\mu V/m)$

Test Figure:

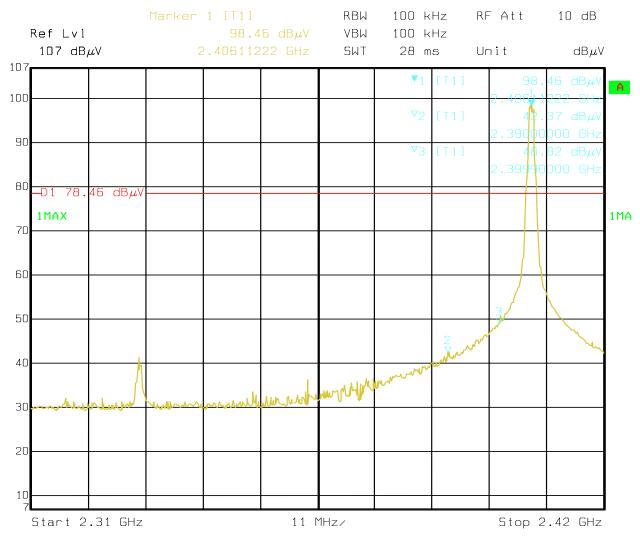

Date: 19.AUG.2009 18:27:38

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 37 of 48

Report No: 0908119 Date: 2009-10-27




CH High

10.4 Out of Band Test Result

Product:	2.4GHz Radio Control System		Test Mode:	CH High
Mode	Keep Transmitting		Input Voltage	DC 12V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBµV/m)	47.8(PK)(V)	Limit	74(dBµV/m)
Restrict Band	$PK(dB\mu V/m)$	41.9(PK)(H)		54(dBµV/m)

Test Figure:

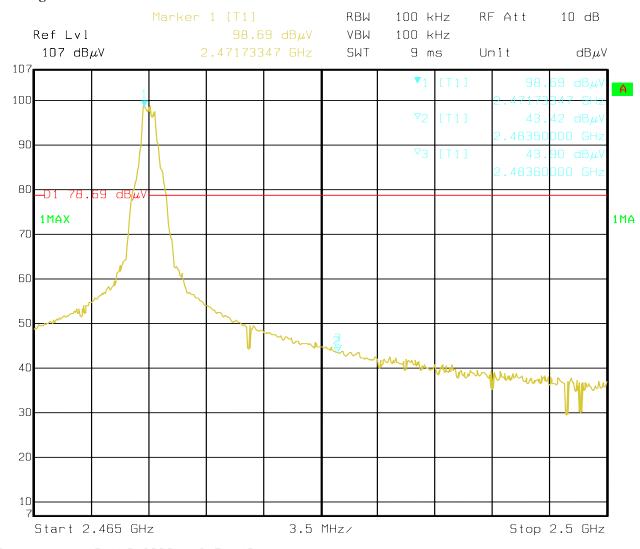

Date: 19.AUG.2009 18:51:49

Note: The Max. FS in Restrict Band are measured in conventional method.

Report No: 0908119 Page 38 of 48

Date: 2009-10-27



11.0 Antenna Requirement 11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi

are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

The antenna is PIFA antenna. The maximum Gain of this antenna is 2.0dBi



12.0 Maximum Permissible Exposure

Applicable Standard

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2m normally can be maintained between the user and the device.

(a) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Times E 2 , H 2 or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100000			5	6

(b) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Times E 2 , H 2 or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100000			1.0	30

Note: f=frequency in MHz; *Plane-wave equivalent power density

MPE Calculation Method

 $E(V/m) = (30*P*G)^{0.5}/d$ Power Density: $Pd(W/m^2) = E^2/377$

 $\mathbf{E} = \text{Electric Field (V/m)}$

P = Peak RF output Power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

 $Pd = (30*P*G) / (377*d^2)$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 40 of 48

Date: 2009-10-27

Report No: 0908119



Calculated Result and Limit

Antenna Gain (Numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm²)	Limit of Power Density (S) (mW/cm²)	Test Result
1.585	14.52	28.314	0.0089	1	Compiles

Page 41 of 48

Report No: 0908119 Date: 2009-10-27




13.0 FCC ID Label

FCC ID: Q9K09GH001

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.


Mark Location:

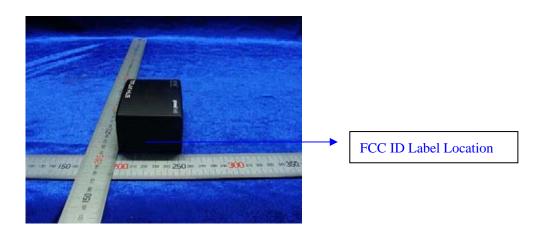



14.0 **Photo of testing**

14.1 Emission Radiated test View--

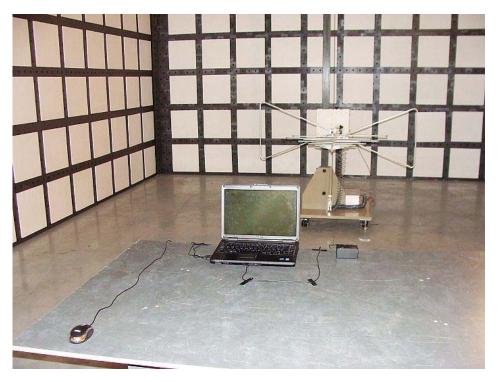

Conducted Emissions test View



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to



14.2 Photo for the EUT






The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



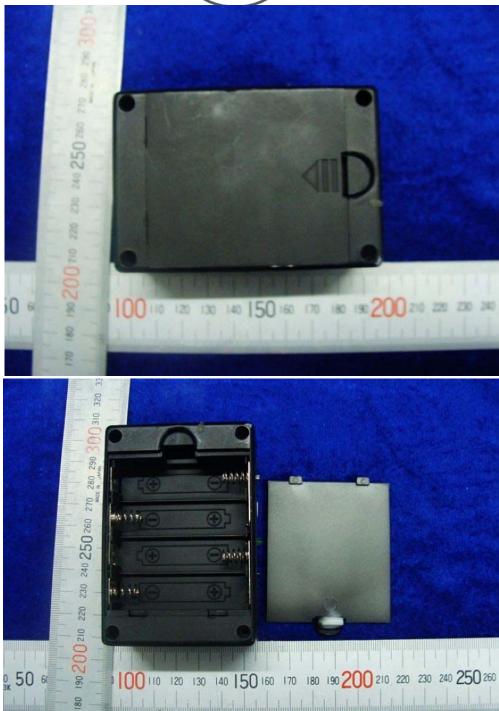

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 45 of 48

Report No: 0908119 Date: 2009-10-27



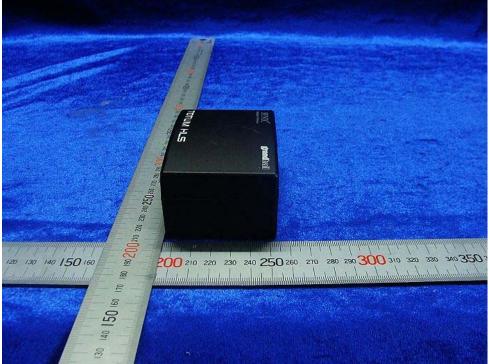

Interior View



The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to

Page 46 of 48

Report No: 0908119 Date: 2009-10-27



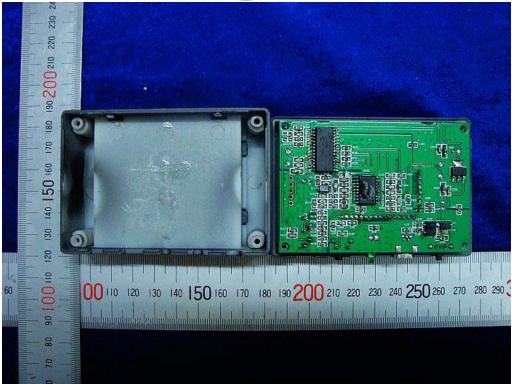



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to

Page 47 of 48

Report No: 0908119 Date: 2009-10-27





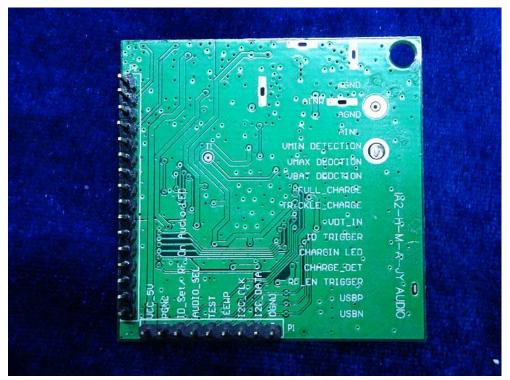


The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



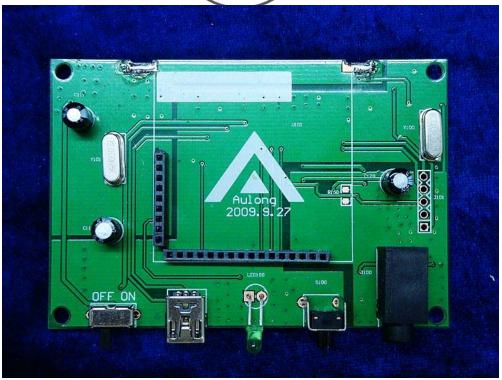

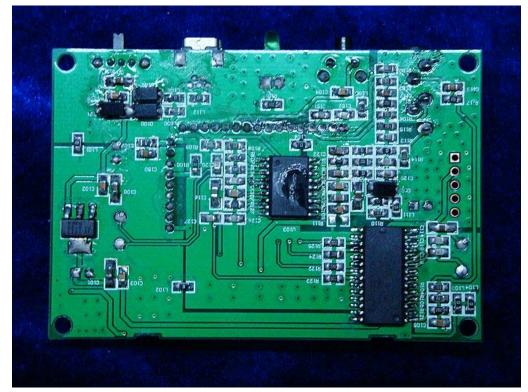

End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to