

FCC Part 15

EMI TEST REPORT

of

E.U.T. : BLUE TOOTH CAR KIT
MODEL : BLUE TOOTH CAR KIT
FCC ID. : Q9OBLUETOOTH

for

APPLICANT : Triamp Technology, Ltd.
ADDRESS : 3F, NO 2, Alley 16, Lane 235, Bao Chiao Road,
Hsin Tien, Taipei, Taiwan, R.O.C.

Test Performed by

ELECTRONICS TESTING CENTER, TAIWAN
NO. 34, LIN 5, DING FU TSUN, LINKOU HSIANG,
TAIPEI HSIEN, TAIWAN, R.O.C.

Tel:(02)26023052 Fax:(02)26010910
<http://www/etc.org.tw> ; e-mail:etcemi@seed.net.tw

Report Number : ET92R-06-065-03

TEST REPORT CERTIFICATION

Applicant : Triamp Technology, Ltd.
3F, NO 2, Alley 16, Lane 235, Bao Chiao Road, Hsin Tien, Taipei,
Taiwan, R.O.C.

Manufacturer : Triamp Technology, Ltd.
3F, NO 2, Alley 16, Lane 235, Bao Chiao Road, Hsin Tien, Taipei,
Taiwan, R.O.C.

Description of EUT :
a) Type of EUT : BLUE TOOTH CAR KIT
b) Trade Name : Triamp Technology
c) Model No. : BLUE TOOTH CAR KIT
d) Power Supply : 12Vdc

Regulation Applied : FCC Rules and Regulations Part 15 Subpart B & C (2002)

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.4, and the energy emitted by the device was found to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relates only to the item tested.
2. The testing report shall not be reproduced except in full, without the written approval of ETC.

Issued Date : Aug. 11, 2003

Test Engineer : *falcon Shi*
(Falcon Shi)

Approve & Authorized Signer : *Will Yauo*
Will Yauo, Manager
EMC Dept. II of ELECTRONICS
TESTING CENTER, TAIWAN

| Table of Contents | Page |
|--|-------------|
| 1 GENERAL INFORMATION | 1 |
| 1.1 Product Description..... | 1 |
| 1.2 Characteristics of Device | 1 |
| 1.3 Test Methodology | 1 |
| 1.4 Test Facility..... | 1 |
| 2 PROVISIONS APPLICABLE..... | 2 |
| 2.1 Definition..... | 2 |
| 2.2 Requirement for Compliance..... | 3 |
| 2.3 Restricted Bands of Operation..... | 5 |
| 2.5 User Information..... | 6 |
| 3. SYSTEM TEST CONFIGURATION | 7 |
| 3.1 Justification..... | 7 |
| 3.2 Devices for Tested System..... | 7 |
| 4 RADIATED EMISSION MEASUREMENT | 8 |
| 4.1 Applicable Standard..... | 8 |
| 4.2 Measurement Procedure..... | 8 |
| 4.3 Measuring Instrument | 10 |
| 4.4 Radiated Emission Data..... | 11 |
| 4.4.1 Fundamental and Harmonics..... | 11 |
| 4.4.2 Radiated Emissions in Restricted Bands | 14 |
| 4.4.3 Other Emissions..... | 15 |
| 4.5 Field Strength Calculation..... | 16 |
| 4.6 Photos of Radiation Measuring Setup..... | 17 |
| 5 CONDUCTED EMISSION MEASUREMENT..... | 18 |
| 5.1 Description..... | 18 |
| 6 ANTENNA REQUIREMENT | 19 |
| 6.1 Standard Applicable | 19 |
| 6.2 Antenna Connected Construction..... | 19 |
| 7 HOPPING CHANNEL SEPARATION..... | 20 |
| 7.1 Standard Applicable | 20 |
| 7.2 Measurement Procedure..... | 20 |
| 7.3 Measurement Equipment | 21 |
| 7.4 Measurement Data | 21 |
| 8 NUMBER OF HOPPING FREQUENCY USED | 22 |

| | |
|--|-----------|
| 8.1 Standard Applicable | 22 |
| 8.2 Measurement Procedure..... | 22 |
| 8.3 Measurement Equipment | 22 |
| 8.4 Measurement Data | 23 |
| 9 CHANNEL BANDWIDTH..... | 24 |
| 9.1 Standard Applicable | 24 |
| 9.2 Measurement Procedure..... | 24 |
| 9.3 Measurement Equipment | 24 |
| 9.4 Measurement Data | 25 |
| 10 DWELL TIME ON EACH CHANNEL..... | 26 |
| 10.1 Standard Applicable | 26 |
| 10.2 Measurement Procedure..... | 26 |
| 10.3 Measurement Equipment | 26 |
| 10.4 Measurement Data | 27 |
| 11 OUTPUT POWER MEASUREMENT..... | 28 |
| 11.1 Standard Applicable | 28 |
| 11.2 Measurement Procedure..... | 28 |
| 11.3 Measurement Equipment | 28 |
| 11.4 Measurement Data | 29 |
| 12 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT..... | 30 |
| 12.1 Standard Applicable | 30 |
| 12.2 Measurement Procedure..... | 30 |
| 12.3 Measurement Equipment | 30 |
| 12.4 Measurement Data | 31 |
| 13 OUT-OF-BAND CONDUCTED EMISSION MEASUREMENT | 32 |
| 13.1 Standard Applicable | 32 |
| 13.2 Measurement Procedure..... | 32 |
| 13.3 Measurement Equipment | 32 |
| 13.4 Measurement Data | 33 |
| 14 PEAK POWER SPECTRAL DENSITY MEASUREMENT | 34 |
| 14.1 Standard Applicable | 34 |
| 14.2 Measurement Procedure..... | 34 |
| 14.3 Measurement Equipment | 34 |
| 14.4 Measurement Data | 35 |
| APPENDIX 1 : PLOTTED DATA FOR SEPARATION OF ADJACENT CHANNEL..... | 1 |

| | |
|--|-----------|
| APPENDIX 2 : PLOTTED DATA FOR TOTAL USED HOPPING FREQUENCIES..... | 5 |
| APPENDIX 3 : PLOTTED DATA FOR CHANNEL BANDWIDTH | 7 |
| APPENDIX 4 : PLOTTED DATA FOR CHANNEL DWELL TIME..... | 11 |
| APPENDIX 5 : PLOTTED DATA FOR OUTPUT PEAK POWER..... | 18 |
| APPENDIX 6 : PLOTTED DATA FOR 100 kHz BANDWIDTH FROM BAND EDGE..... | 22 |
| APPENDIX 7 : PLOTTED DATA FOR OUT-OF-BAND CONDUCTED EMISSION..... | 25 |
| APPENDIX 8 : PLOTTED DATA FOR PEAK POWER SPECTRAL DENSITY..... | 32 |

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : BLUE TOOTH CAR KIT
- b) Trade Name : Triamp Technology
- c) Model No. : BLUE TOOTH CAR KIT
- d) Power Supply : 12Vdc

1.2 Characteristics of Device

The Car Kit is designed to make driving your car and talking on the phone safe and easy. It consists of a receiver, a four -button mountable control module, a multi-directional microphone, and a speaker. When properly installed, the Car Kit enables you to talk freely to somebody on your mobile phone without having to lift the phone at all.

1.3 Test Methodology

For BLUE TOOTH CAR KIT, both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.4 (1992) and for processing gain measurement is according to FCC Public Notice. Other required measurements were illustrated in separate sections of this test report for details.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at No.34, Lin 5, Ding Fu Tsun, Linkou Hsiang, Taipei Hsien, Taiwan, R.O.C.

This site has been fully described in a report submitted to your office, and accepted in a letter dated Feb. 10, 2000.

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device :

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business or industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 Ω H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency MHz | Quasi Peak dB μ V | Average dB μ V |
|------------------|--------------------------|-----------------------|
| 0.15 - 0.5 | 66-56* | 56-46* |
| 0.5 - 5.0 | 56 | 46 |
| 5.0 - 30.0 | 60 | 50 |

* Decreases with the logarithm of the frequency

For intentional device, according to § 15.207(a) Line Conducted Emission Limits is same as above table.

(2) Radiated Emission Requirement

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency MHz | Distance Meters | Radiated dB μ V/m | Radiated μ V/m |
|------------------|--------------------|--------------------------|-----------------------|
| 30 - 88 | 3 | 40.0 | 100 |
| 88 - 216 | 3 | 43.5 | 150 |
| 216 - 960 | 3 | 46.0 | 200 |
| Above 960 | 3 | 54.0 | 500 |

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

(3) Antenna Requirement

For intentional device, according to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

(4) Hopping Channel Separation

According to 15.247(a)(1), frequency hopping system shall have , hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

(5) Number of Hopping frequencies used

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels.

(6) Hopping Channel Bandwidth

According to 15.247(a)(1)(ii), for frequency hopping system operating in the 5725-5850 MHz band, the maximum 20dB bandwidth of the hopping channel is 1MHz.

(7) Dwell Time of each frequency within a 30-second period

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5 band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

(8) Output Power Requirement

According to 15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(9) 100 kHz Bandwidth of Frequency Band Edges Requirement

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

(10) Out-of-Band Conducted Emission Requirement

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

(11) Peak Power Spectral Density Requirement

According to 15.247(d), for digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

| MHz | MHz | MHz | GHz |
|-------------------|-----------------------|---------------|-------------|
| 0.090 - 0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| 0.495 - 0.505 ** | 16.69475 - 16.69525 | 608-614 | 5.35-5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475 - 156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2655-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3360-4400 | Above 38.6 |
| 13.36-13.41 | | | |

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

3. SYSTEM TEST CONFIGURATION

3.1 Justification

For both radiated and conducted emissions below 1 GHz, the system was configured for testing in a typical fashion as a customer would normally use it. The peripherals other than EUT were connected in normally standing by situation. Measurement was performed under the condition that a computer program was exercised to simulate data communication of EUT, and the transmission rate was set to maximum allowed by EUT. Three highest emissions were verified with varying placement of the transmitting antenna connected to EUT to maximize the emission from EUT.

For conducted emissions, only measured on TX and RX operation, for the digital circuits portion also function normally whenever TX or RX is operated. For radiated emissions, whichever RF channel is operated, the digital circuits' function identically. As the reason, measurement of radiated emissions from digital circuits is only performed with channel 11 by transmitting mode.

3.2 Devices for Tested System

| Device | Manufacture | Model / FCC ID. | Cable Description |
|-------------------------|--------------------|-------------------------------------|--------------------------|
| BLUE TOOTH CAR KIT * | Triamp Technology | BLUE TOOTH CAR KIT /Q9OBLUETOOTH | ---- |

Remark “*” means equipment under test.

4 RADIATED EMISSION MEASUREMENT

4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with § 15.109(a).

For intentional radiators, according to § 15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with § 15.247 (c)

4.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.

Note : A band pass filter was used to avoid pre-amplifier saturated when measure TX operation mode in frequency band above 1 GHz.

5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


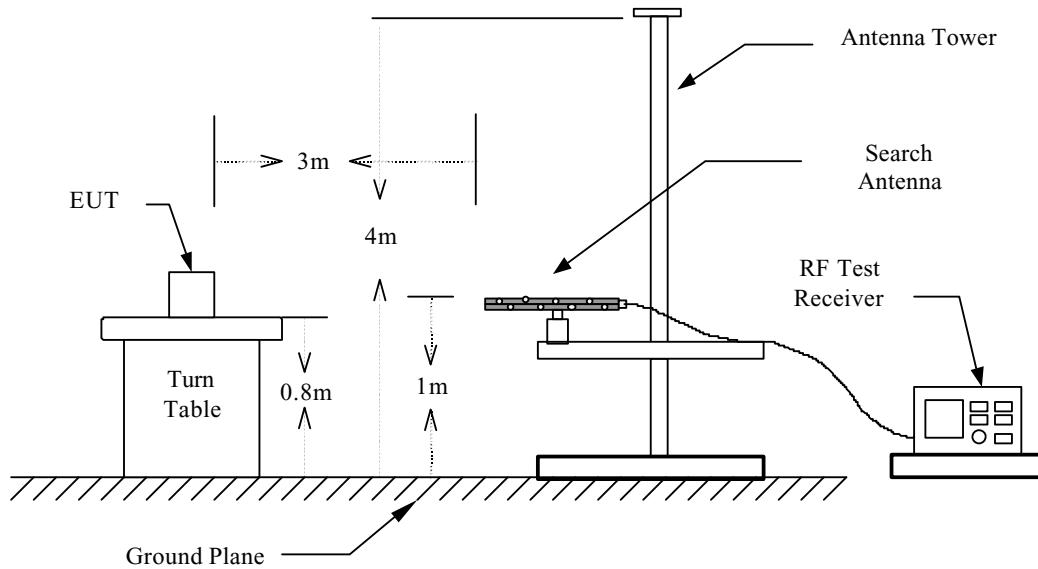


Figure 2 : Frequencies measured above 1 GHz configuration

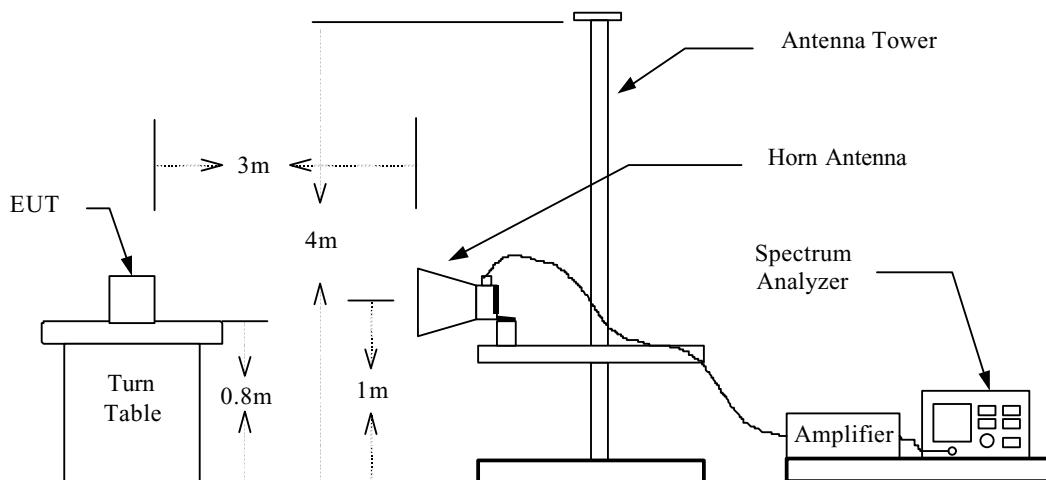

4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement:

| Equipment | Manufacturer | Model No. | Next Cal. Due |
|----------------------|-----------------|-----------|---------------|
| Spectrum Analyzer | Hewlett-Packard | 8568B | 01/10/2004 |
| Pre-selector | Hewlett-Packard | 85685A | 01/10/2004 |
| Quasi Peak Detector | Hewlett-Packard | 85650A | 01/10/2004 |
| RF Test Receiver | Rohde & Schwarz | ESVS 30 | 08/06/2003 |
| RF Test Receiver | Rohde & Schwarz | ESBI | 05/15/2004 |
| Horn Antenna | EMCO | 3115 | 05/15/2004 |
| Log periodic Antenna | EMCO | 3146 | 11/04/2003 |
| Biconical Antenna | EMCO | 3110B | 11/04/2003 |
| Preamplifier | Hewlett-Packard | 8449B | 05/29/2004 |
| Preamplifier | Hewlett-Packard | 8447D | 09/29/2003 |
| Spectrum Analyzer | Hewlett-Packard | 8564E | 04/14/2004 |

Measuring instrument setup in measured frequency band when specified detector function is used :

| Frequency Band (MHz) | Instrument | Function | Resolution bandwidth | Video Bandwidth |
|----------------------|-------------------|------------|----------------------|-----------------|
| 30 to 1000 | RF Test Receiver | Quasi-Peak | 120 kHz | N/A |
| | Spectrum Analyzer | Peak | 100 kHz | 100 kHz |
| Above 1000 | Spectrum Analyzer | Peak | 1 MHz | 1 MHz |
| | Spectrum Analyzer | Average | 1 MHz | 300 Hz |

4.4 Radiated Emission Data

4.4.1 Fundamental and Harmonics

Operation Mode : TX/RX

Fundamental Frequency : 2402 MHz

Test Date : Jul. 30, 2003 Temperature : 20 °C Humidity : 65 %

| Frequency (MHz) | Reading (dBuV) | | | | Factor (dB) Corr. | Result @3m (dBuV/m) | | Limit @3m (dBuV/m) | | Margin (dB) | Table Deg. (Deg.) | Ant. High (m) |
|--------------------|----------------|------|------|------|-------------------------|------------------------|------|-----------------------|------|----------------|-------------------------|---------------------|
| | H | | V | | | Peak | Ave | Peak | Ave | | | |
| *2400.545 | 52.5 | 47.6 | 51.0 | 44.8 | -3.1 | 49.4 | 44.5 | 74.0 | 54.0 | -9.5 | 360 | 1.5 |
| *4800.856 | --- | --- | --- | --- | 2.5 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| *7201.167 | --- | --- | --- | --- | 5.7 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| *9601.478 | --- | --- | --- | --- | 7.2 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| *12001.789 | --- | --- | --- | --- | 9.2 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 4803.645 | --- | --- | 48.5 | 34.5 | 2.5 | 51.0 | 37.0 | 74.0 | 54.0 | -17.0 | 23 | 1.5 |
| 7206.320 | --- | --- | --- | --- | 5.7 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 9608.995 | --- | --- | --- | --- | 7.2 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 12011.670 | --- | --- | --- | --- | 9.2 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 14414.345 | --- | --- | --- | --- | 11.5 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 16817.020 | --- | --- | --- | --- | 11.8 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 19219.695 | --- | --- | --- | --- | 8.9 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 21622.370 | --- | --- | --- | --- | 9.7 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 24025.045 | --- | --- | --- | --- | 10.3 | --- | --- | 74.0 | 54.0 | --- | --- | --- |

Note :

1. Remark “*” means local oscillation frequency.
2. The receiving local oscillation frequency and the harmonics are too low to be measured.
3. Remark “---” means that the emission level is too low to be measured (a pre-amplifier of about 35 dB is used).
4. Margins are derived from Peak or Average whichever is lower. If there is only peak value in Result field, the Margin is also referred to average limits.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

Operation Mode : TX/RX

Fundamental Frequency : 2441 MHz

Test Date : Jul. 30, 2003 Temperature : 20 °C Humidity : 65 %

| Frequency (MHz) | Reading (dBuV) | | | | Factor (dB) Corr. | Result @3m (dBuV/m) | | Limit @3m (dBuV/m) | | Margin (dB) | Table Deg. (Deg.) | Ant. High (m) |
|--------------------|----------------|------|------|------|-------------------------|------------------------|------|-----------------------|------|----------------|-------------------------|---------------------|
| | H | | V | | | Peak | Ave | Peak | Ave | | | |
| *2439.483 | 51.5 | 45.6 | 51.6 | 45.6 | -2.9 | 48.7 | 42.7 | 74.0 | 54.0 | -11.3 | 326 | 1.0 |
| *4878.867 | --- | --- | --- | --- | 2.7 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| *7318.251 | --- | --- | --- | --- | 5.9 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| *9757.635 | --- | --- | --- | --- | 7.3 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| *12197.019 | --- | --- | --- | --- | 9.3 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 4881.900 | --- | --- | 47.2 | 34.6 | 2.7 | 49.9 | 37.3 | 74.0 | 54.0 | -16.7 | 21 | 1.5 |
| 7323.825 | --- | --- | --- | --- | 5.9 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 9765.750 | --- | --- | --- | --- | 7.3 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 12207.675 | --- | --- | --- | --- | 9.3 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 14649.600 | --- | --- | --- | --- | 11.6 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 17091.525 | --- | --- | --- | --- | 13.3 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 19533.450 | --- | --- | --- | --- | 8.5 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 21975.375 | --- | --- | --- | --- | 9.9 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 24417.300 | --- | --- | --- | --- | 10.7 | --- | --- | 74.0 | 54.0 | --- | --- | --- |

Note :

1. Remark "*" means local oscillation frequency.
2. The receiving local oscillation frequency and the harmonics are too low to be measured.
3. Remark "---" means that the emission level is too low to be measured (a pre-amplifier of about 35 dB is used).
4. Margins are derived from Peak or Average whichever is lower. If there is only peak value in Result field, the Margin is also referred to average limits.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

Operation Mode : TX/RX

Fundamental Frequency : 2480 MHz

Test Date : Jul. 30, 2003 Temperature : 20 °C Humidity : 65 %

| Frequency (MHz) | Reading (dBuV) | | | | Factor (dB) Corr. | Result @3m (dBuV/m) | | Limit @3m (dBuV/m) | | Margin (dB) | Table Deg. (Deg.) | Ant. High (m) |
|--------------------|----------------|------|------|------|-------------------------|------------------------|------|-----------------------|------|----------------|-------------------------|---------------------|
| | H | | V | | | Peak | Ave | Peak | Ave | | | |
| 2478.625 | 52.8 | 48.0 | 52.5 | 46.6 | -2.8 | 50.0 | 45.2 | 74.0 | 54.0 | -8.8 | 340 | 1.0 |
| 4957.250 | --- | --- | --- | --- | 2.8 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 7318.251 | --- | --- | --- | --- | 5.9 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 9757.635 | --- | --- | --- | --- | 7.3 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 12197.019 | --- | --- | --- | --- | 9.3 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 4960.092 | --- | --- | 48.3 | 34.5 | 2.8 | 51.1 | 37.3 | 74.0 | 54.0 | -16.7 | 34 | 1.5 |
| 7440.051 | --- | --- | --- | --- | 6.1 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 9920.010 | --- | --- | --- | --- | 7.4 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 12399.969 | --- | --- | --- | --- | 9.4 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 14879.928 | --- | --- | --- | --- | 11.5 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 17359.887 | --- | --- | --- | --- | 15.2 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 19839.846 | --- | --- | --- | --- | 8.6 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 22319.805 | --- | --- | --- | --- | 10.2 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 24799.764 | --- | --- | --- | --- | 11.0 | --- | --- | 74.0 | 54.0 | --- | --- | --- |

Note :

1. Remark "*" means local oscillation frequency.
2. The receiving local oscillation frequency and the harmonics are too low to be measured.
3. Remark "---" means that the emission level is too low to be measured (a pre-amplifier of about 35 dB is used).
4. Margins are derived from Peak or Average whichever is lower. If there is only peak value in Result field, the Margin is also referred to average limits.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

4.4.2 Radiated Emissions in Restricted Bands

Operation Mode : Receiving /Transmitting

Test Date : Jul. 30, 2003 Temperature : 20 °C Humidity : 65 %

| Frequency (MHz) | Reading (dBuV) | | | | Factor (dB) Corr. | Result @3m (dBuV/m) | | Limit @3m (dBuV/m) | | Margin (dB) | Table Deg. (Deg.) | Ant. High (m) |
|--------------------|----------------|------|------|------|-------------------------|------------------------|------|-----------------------|------|----------------|-------------------------|---------------------|
| | H | | V | | | Peak | Ave | Peak | Ave | | | |
| 1200.000 | --- | --- | --- | --- | -8.8 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 1386.577 | 46.2 | --- | 45.7 | --- | -8.0 | 38.2 | --- | 74.0 | 54.0 | -15.8 | 69 | 1.2 |
| 1580.000 | --- | --- | --- | --- | -7.0 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 1647.618 | 45.6 | --- | 45.3 | --- | -6.6 | 39.0 | --- | 74.0 | 54.0 | -15.0 | 72 | 1.4 |
| 1700.000 | --- | --- | --- | --- | -6.3 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 1721.390 | 46.1 | --- | 44.2 | --- | -6.2 | 39.9 | --- | 74.0 | 54.0 | -14.1 | 83 | 1.2 |
| 2220.000 | --- | --- | --- | --- | -3.8 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 2484.530 | 63.8 | 44.2 | 61.2 | 43.6 | -2.8 | 61.0 | 41.4 | 74.0 | 54.0 | -12.6 | 36 | 1.5 |
| 2500.000 | --- | --- | --- | --- | -2.7 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 2763.612 | 43.5 | --- | 46.3 | --- | -1.9 | 44.4 | --- | 74.0 | 54.0 | -9.6 | 56 | 1.0 |
| 3260.000 | --- | --- | --- | --- | -0.6 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 3333.678 | --- | --- | --- | --- | -0.4 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 3350.000 | --- | --- | --- | --- | -0.4 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 3782.542 | --- | --- | --- | --- | 1.1 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 4800.000 | --- | --- | --- | --- | 2.5 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 5362.614 | --- | --- | --- | --- | 4.0 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 7500.000 | --- | --- | --- | --- | 6.2 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 8450.000 | --- | --- | --- | --- | 6.8 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 9164.592 | --- | --- | --- | --- | 7.1 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 9400.000 | --- | --- | --- | --- | 7.2 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 15500.000 | --- | --- | --- | --- | 9.0 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 20036.570 | --- | --- | --- | --- | 8.6 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 22500.000 | --- | --- | --- | --- | 10.3 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 23800.000 | --- | --- | --- | --- | 10.4 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 31600.000 | --- | --- | --- | --- | 48.4 | --- | --- | 74.0 | 54.0 | --- | --- | --- |
| 36450.000 | --- | --- | --- | --- | 46.7 | --- | --- | 74.0 | 54.0 | --- | --- | --- |

Note :

1. Remark “---” means that the emissions level is too low to be measured.
2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

4.4.3 Other Emissions**A**

Operation Mode : TX/RX

Test Date : Jul. 30, 2003 Temperature : 25 °C Humidity : 60%

| Frequency (MHz) | Ant-Pol H/V | Meter Reading (dBuV) | Corrected Factor (dB) | Result @3m (dBuV/m) | Limit @3m (dBuV/m) | Margin (dB) | Table Degree (Deg.) | Ant. High (m) |
|--------------------|----------------|----------------------------|-----------------------------|---------------------------|--------------------------|----------------|---------------------------|------------------|
| 147.720 | H | 38.8 | -10.2 | 28.6 | 43.5 | -14.9 | 96 | 4.0 |
| 184.712 | H | 37.2 | -8.8 | 28.4 | 43.5 | -15.1 | 42 | 3.8 |
| 295.683 | V | 31.1 | -1.3 | 29.8 | 46.0 | -16.2 | 57 | 1.8 |
| 443.510 | H | 39.8 | -5.6 | 34.2 | 46.0 | -11.8 | 57 | 2.7 |
| 449.820 | V | 39.4 | -5.6 | 33.8 | 46.0 | -12.2 | 78 | 1.7 |
| 591.236 | H | 39.4 | -4.8 | 34.6 | 46.0 | -11.4 | 114 | 2.5 |

Note :

1. Remark “---” means that the emissions level is too low to be measured.
2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

B Emission frequencies above 1 GHz

Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured with a pre-amplifier of 35 dB.

4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss (if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corrected Factor} = \text{Antenna FACTOR} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

4.6 Photos of Radiation Measuring Setup

Please see Exhibit F-Test Setup Photos

5 CONDUCTED EMISSION MEASUREMENT

5.1 Description

This EUT is excused from investigation of conducted emission, for it is powered by DC 12V only. According to § 15.207 (d), measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

6 ANTENNA REQUIREMENT

6.1 Standard Applicable

For intentional device, according to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2 Antenna Connected Construction

The antenna of this unit is designed to be mounted permanently on the device. No consideration of replacement. Please see construction Photos Of Exhibit B for details.

7 HOPPING CHANNEL SEPARATION


7.1 Standard Applicable

According to 15.247(a)(1), frequency hopping system shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled. Then set it to any one convenient frequency within its operating range.
3. Use the following spectrum analyzer settings:
 Span = wide enough to capture the peaks of two adjacent channels
 Resolution (or IF) Bandwidth (RBW) \geq 1% of the span
 Video (or Average) Bandwidth (VBW) \geq RBW
 Sweep = auto
 Detector function = peak
 Trace = max hold
4. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

Figure 4 : Measurement configuration.

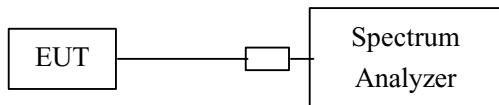

7.3 Measurement Equipment

| Equipment | Manufacturer | Model No. | Next Cal. Due |
|-------------------|-----------------------|-----------|---------------|
| Spectrum Analyzer | Hewlett-Packard | 8564E | 04/14/2004 |
| Attenuator | Weinschel Engineering | 1 | N/A |
| Plotter | Hewlett-Packard | 7440A | N/A |

7.4 Measurement Data

Test Date : Jul. 30, 2003 Temperature : 25 °C Humidity : 60 %

- 1) 2402 MHz : Adjacent Hopping Channel Separation is 1000kHz
- 2) 2441 MHz : Adjacent Hopping Channel Separation is 1000kHz
- 3) 2480 MHz : Adjacent Hopping Channel Separation is 1000kHz

Note : 1. Please see appendix 1 for Plotted Data

2. The expanded uncertainty of the hopping channel separation tests is 2dB.

8 NUMBER OF HOPPING FREQUENCY USED

8.1 Standard Applicable

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels.

8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled.
3. Use the following spectrum analyzer settings:
 - Span = the frequency band of operation
 - RBW \geq 1% of the span
 - VBW \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

8.3 Measurement Equipment

| Equipment | Manufacturer | Model No. | Next Cal. Due |
|-------------------|-----------------------|-----------|---------------|
| Spectrum Analyzer | Hewlett-Packard | 8564E | 04/14/2004 |
| Attenuator | Weinschel Engineering | 1 | N/A |
| Plotter | Hewlett-Packard | 7440A | N/A |

8.4 Measurement Data

Test Date : Jul. 30, 2003 Temperature : 25 °C Humidity : 60 %

There are 79 hopping frequencies in a hopping sequence.

*Note : 1. Please see appendix 2 for Plotted Data
2. The expanded uncertainty of umber of hopping frequency used tests is 2dB.*

9 CHANNEL BANDWIDTH

9.1 Standard Applicable

According to 15.247(a)(1)(ii), for frequency hopping system operating in the 5725-5850 MHz band, the maximum 20dB bandwidth of the hopping channel is 1MHz.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.

3. Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW \geq 1% of the 20 dB bandwidth

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. Plot the result on the screen of spectrum analyzer.

5. Repeat above procedures until all frequencies measured were complete.

9.3 Measurement Equipment

| Equipment | Manufacturer | Model No. | Next Cal. Due |
|-------------------|-----------------------|-----------|---------------|
| Spectrum Analyzer | Hewlett-Packard | 8564E | 04/14/2004 |
| Attenuator | Weinschel Engineering | 1 | N/A |
| Plotter | Hewlett-Packard | 7440A | N/A |

9.4 Measurement Data

Test Date : Jul. 30, 2003 Temperature : 25 °C Humidity : 60 %

- 1) 2402 MHz : Channel Bandwidth is 877 kHz
- 2) 2441 MHz : Channel Bandwidth is 870 kHz
- 3) 2480 MHz : Channel Bandwidth is 877 kHz

*Note : 1. Please see appendix 3 for Plotted Data
2. The expanded uncertainty of channel bandwidth tests is 2dB.*

10 DWELL TIME ON EACH CHANNEL

10.1 Standard Applicable

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5 band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled.
3. Use the following spectrum analyzer settings:
 - Span = zero span, centered on a hopping channel
 - RBW = 1 MHz
 - VBW \geq RBW
 - Sweep = as necessary to capture the entire dwell time per hopping channel
 - Detector function = peak
 - Trace = max hold
4. Use the marker-delta function to determine the dwell time. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

10.3 Measurement Equipment

| Equipment | Manufacturer | Model No. | Next Cal. Due |
|-------------------|-----------------------|-----------|---------------|
| Spectrum Analyzer | Hewlett-Packard | 8564E | 04/14/2004 |
| Attenuator | Weinschel Engineering | 1 | N/A |
| Plotter | Hewlett-Packard | 7440A | N/A |

10.4 Measurement Data

Test Date : Jul. 30, 2003 Temperature : 25 °C Humidity : 60 %

- 1) 2402 MHz : the dwell time is $102 \times 3.16 \times 500\text{ms} = 161.16 \text{ ms}$
- 2) 2441 MHz : the dwell time is $102 \times 3.16 \times 500\text{ms} = 161.16 \text{ ms}$
- 3) 2480 MHz : the dwell time is $102 \times 3.16 \times 500\text{ms} = 161.16 \text{ ms}$

The maximum time of occupancy for a particular channel is 161.16 msec within a period of 0.4 seconds multiplied by the number of hopping channels employed, which is less than the 400 msec allowed by the rules; therefore, it meets the requirements of this section.

Note : 1. Please see appendix 4 for Plotted Data

2. The expanded uncertainty of dwell time on each channel tests is 2dB.

11 OUTPUT POWER MEASUREMENT

11.1 Standard Applicable

According to 15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

11.3 Measurement Equipment

| Equipment | Manufacturer | Model No. | Next Cal. Due |
|-------------------|-----------------------|-----------|---------------|
| Spectrum Analyzer | Hewlett-Packard | 8564E | 04/14/2004 |
| Attenuator | Weinschel Engineering | 1 | N/A |
| Plotter | Hewlett-Packard | 7440A | N/A |

11.4 Measurement Data

Test Date : Jul. 30, 2003 Temperature : 25 °C Humidity : 60 %

- 1) 2402 MHz : Output Peak Power is -5.17 dBm = **0.304**mW
- 2) 2441 MHz : Output Peak Power is -3.00 dBm = **0.500**mW
- 3) 2480 MHz : Output Peak Power is -1.83 dBm = **0.660**mW

Note : 1. Please see appendix 5 for Plotted Data

2. The expanded uncertainty of output power measurement tests is 2dB.

12 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

12.1 Standard Applicable

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

12.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.

3. Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

4. Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Plot the result on the screen of spectrum analyzer.

5. Repeat above procedures until all measured frequencies were complete.

12.3 Measurement Equipment

| Equipment | Manufacturer | Model No. | Next Cal. Due |
|-------------------|-----------------------|-----------|---------------|
| Spectrum Analyzer | Hewlett-Packard | 8564E | 04/14/2004 |
| Attenuator | Weinschel Engineering | 1 | N/A |
| Plotter | Hewlett-Packard | 7440A | N/A |

12.4 Measurement Data

Test Date : Jul. 30, 2003 Temperature : 25 °C Humidity : 60 %

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

Note : 1. Please see appendix 6 for Plotted Data

2. The expanded uncertainty of the 100 KHz bandwidth of band edges tests is 1000Hz.

13 OUT-OF-BAND CONDUCTED EMISSION MEASUREMENT

13.1 Standard Applicable

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

13.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold.

4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

13.3 Measurement Equipment

| Equipment | Manufacturer | Model No. | Next Cal. Due |
|-------------------|-----------------------|-----------|---------------|
| Spectrum Analyzer | Hewlett-Packard | 8564E | 04/14/2004 |
| Attenuator | Weinschel Engineering | 1 | N/A |
| Plotter | Hewlett-Packard | 7440A | N/A |

13.4 Measurement Data

Mode : Low Channel

Test Date : Jul. 30, 2003 Temperature : 25 °C Humidity : 60 %

- a) 1 GHz to 5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 5 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Mode : Mid Channel

Test Date : Jul. 30, 2003 Temperature : 25 °C Humidity : 60 %

- a) 1 GHz to 5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 5 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Mode : Hi Channel

Test Date : Jul. 30, 2003 Temperature : 25 °C Humidity : 60 %

- c) 1 GHz to 5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- d) 5 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier

Note : 1. Please see appendix 7 for Plotted Data

2. The expanded uncertainty of the out-of-band conducted emission tests is 2dB.

14 PEAK POWER SPECTRAL DENSITY MEASUREMENT

14.1 Standard Applicable

According to 15.247(d), for digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

14.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
 - Span = 300 kHz, centered on highest level appearing on spectral display
 - RBW = 3 kHz
 - VBW \geq RBW
 - Sweep = 100 s
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

14.3 Measurement Equipment

| Equipment | Manufacturer | Model No. | Next Cal. Due |
|-------------------|-----------------------|-----------|---------------|
| Spectrum Analyzer | Hewlett-Packard | 8564E | 04/14/2004 |
| Attenuator | Weinschel Engineering | 1 | N/A |
| Plotter | Hewlett-Packard | 7440A | N/A |

14.4 Measurement Data


Test Date : Jul. 30, 2003 Temperature : 25 °C Humidity : 60 %


- a) 2402MHz : Maximum Power Density of 3 kHz Bandwidth is -14.67dBm
- b) 2441MHz : Maximum Power Density of 3 kHz Bandwidth is -12.83dBm
- c) 2480MHz : Maximum Power Density of 3 kHz Bandwidth is -11.83dBm


Note : 1. Please see appendix 8 for Plotted Data

2. The expanded uncertainty of the power density tests is 2dB.


Appendix 1 : Plotted Data for Separation of Adjacent Channel

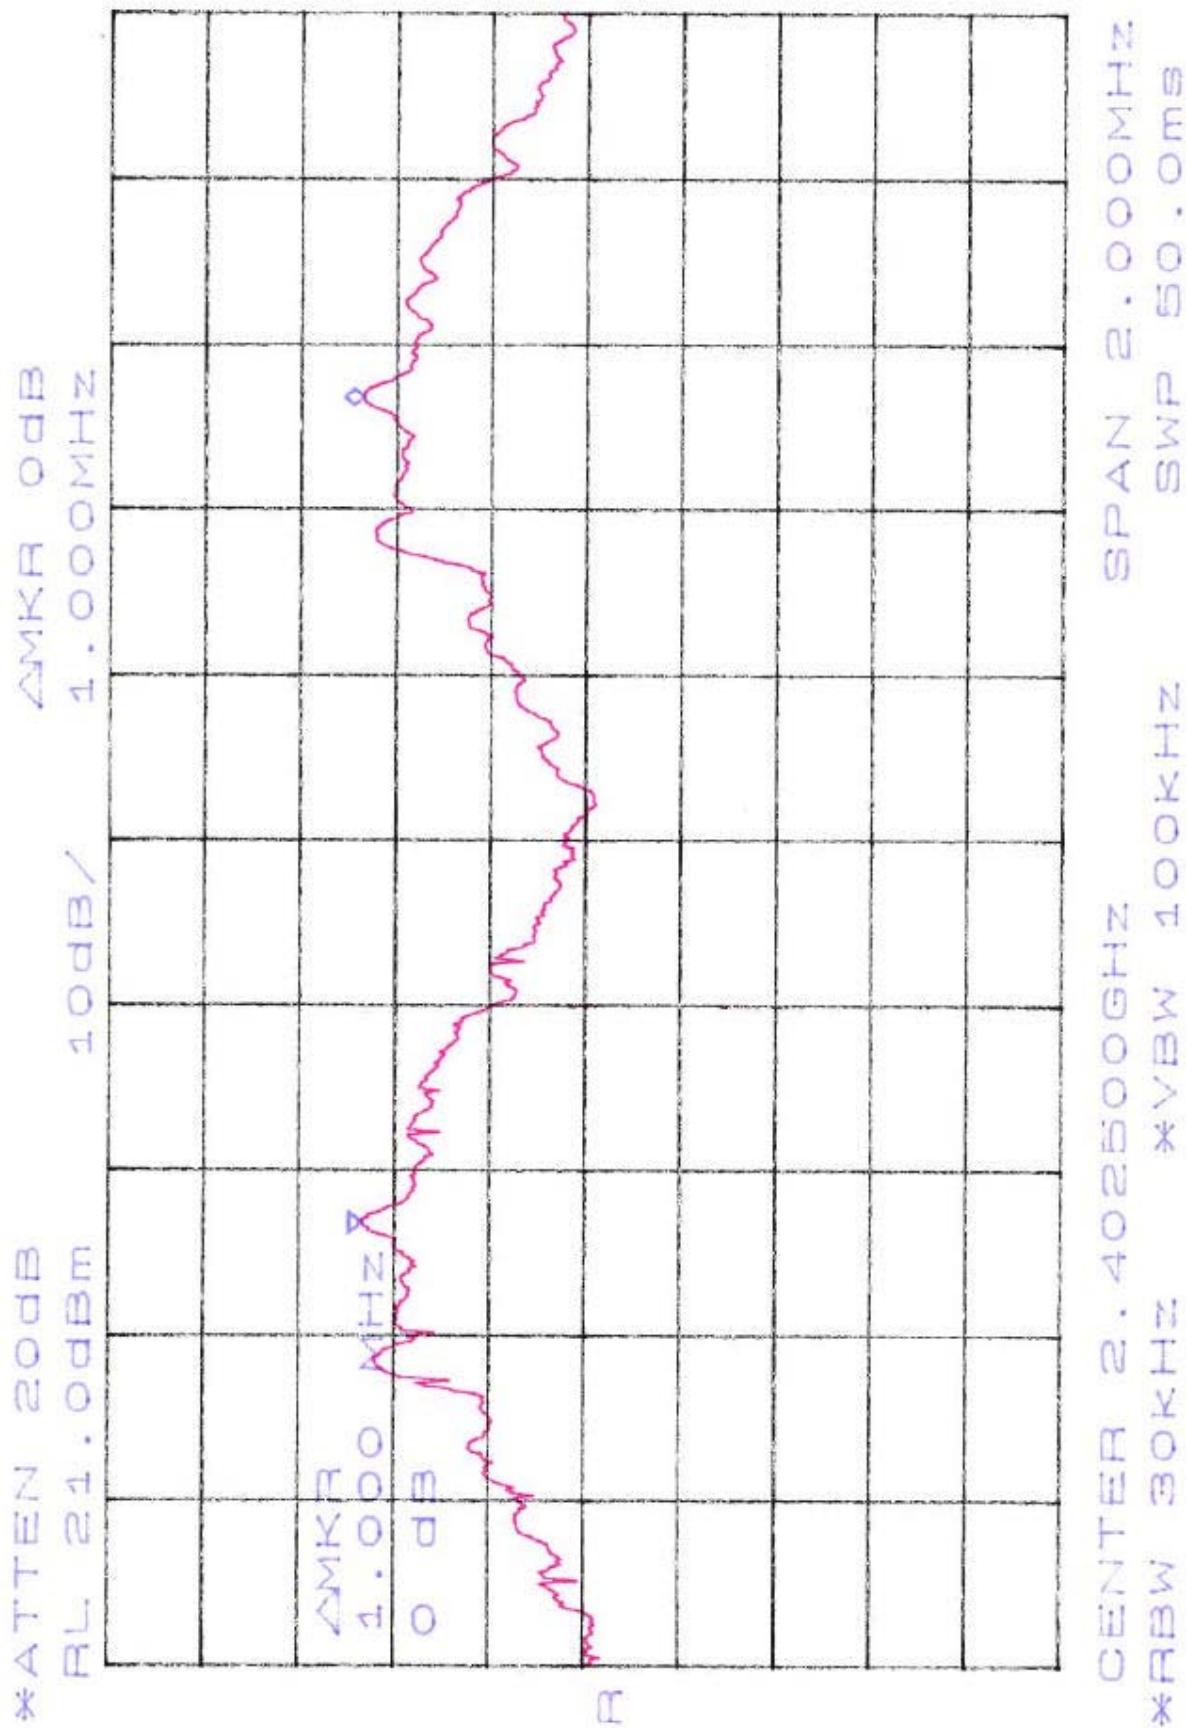

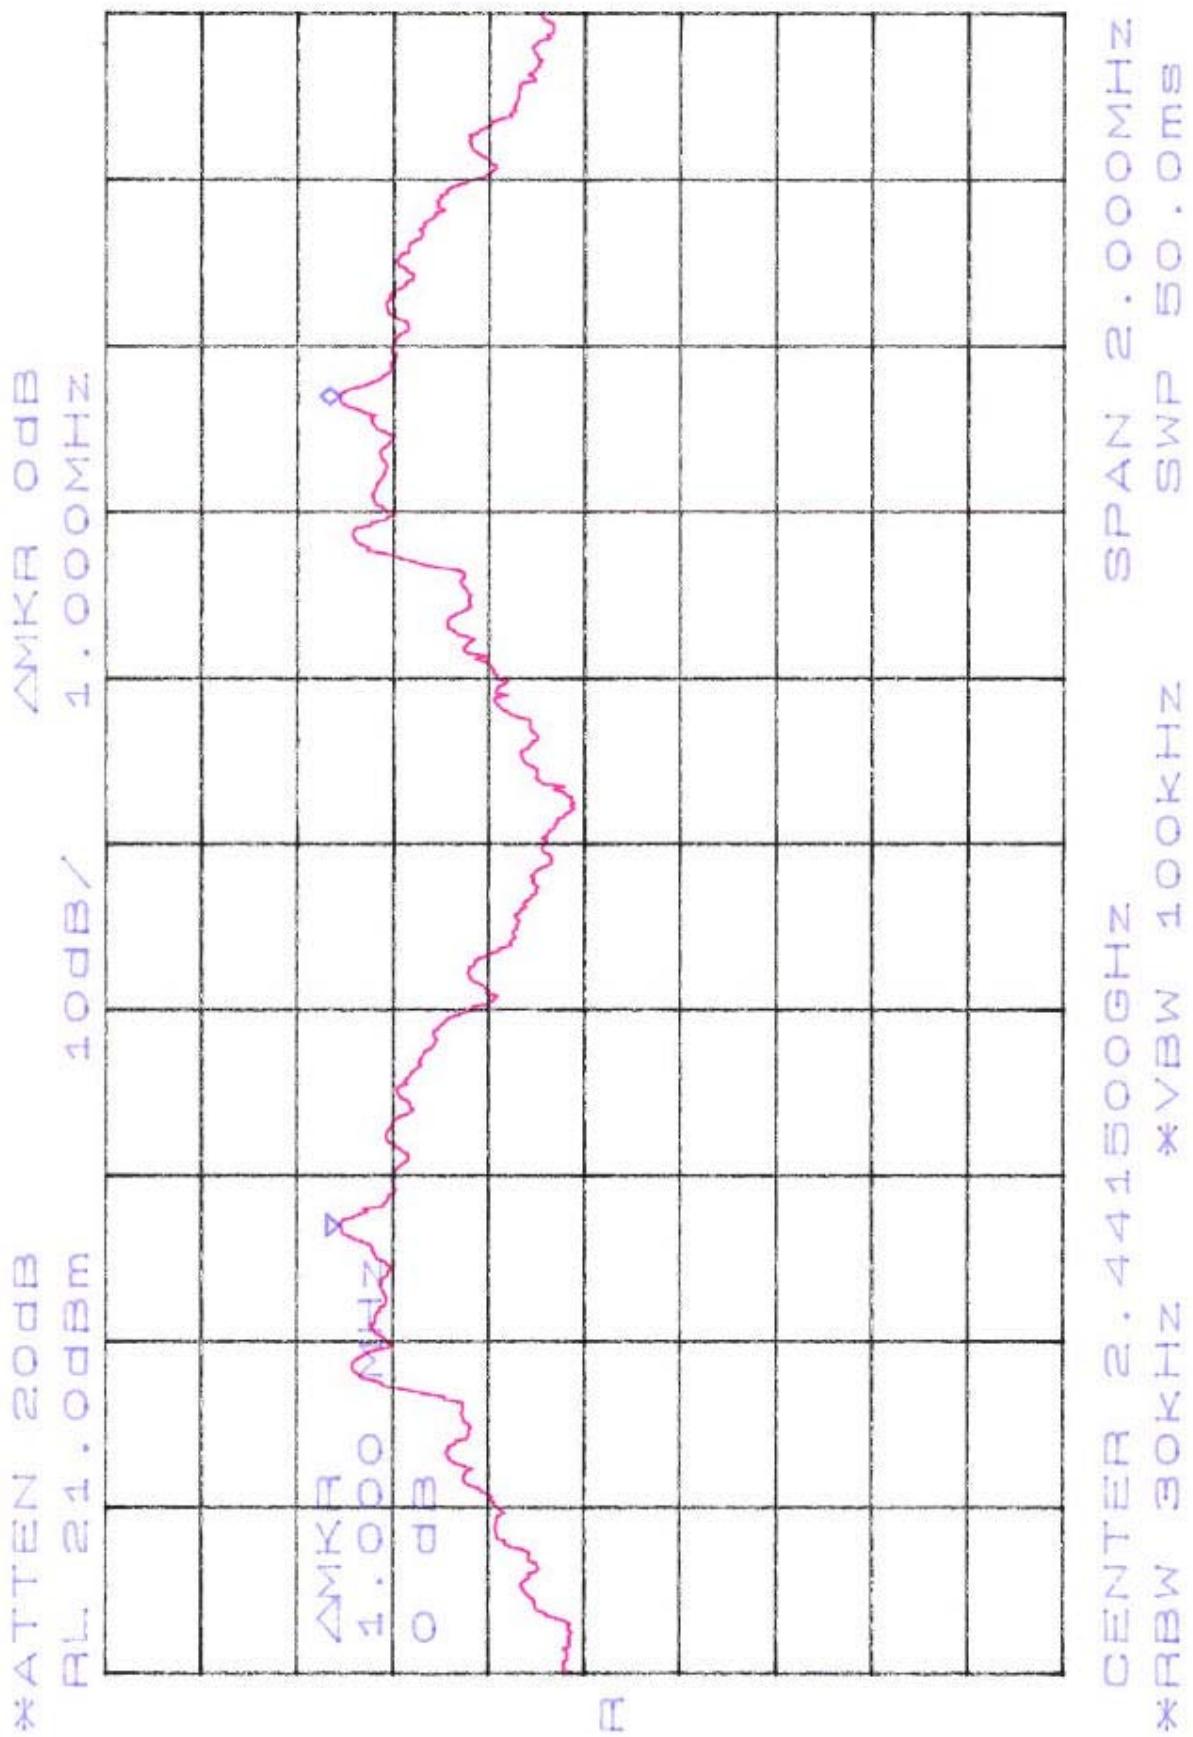


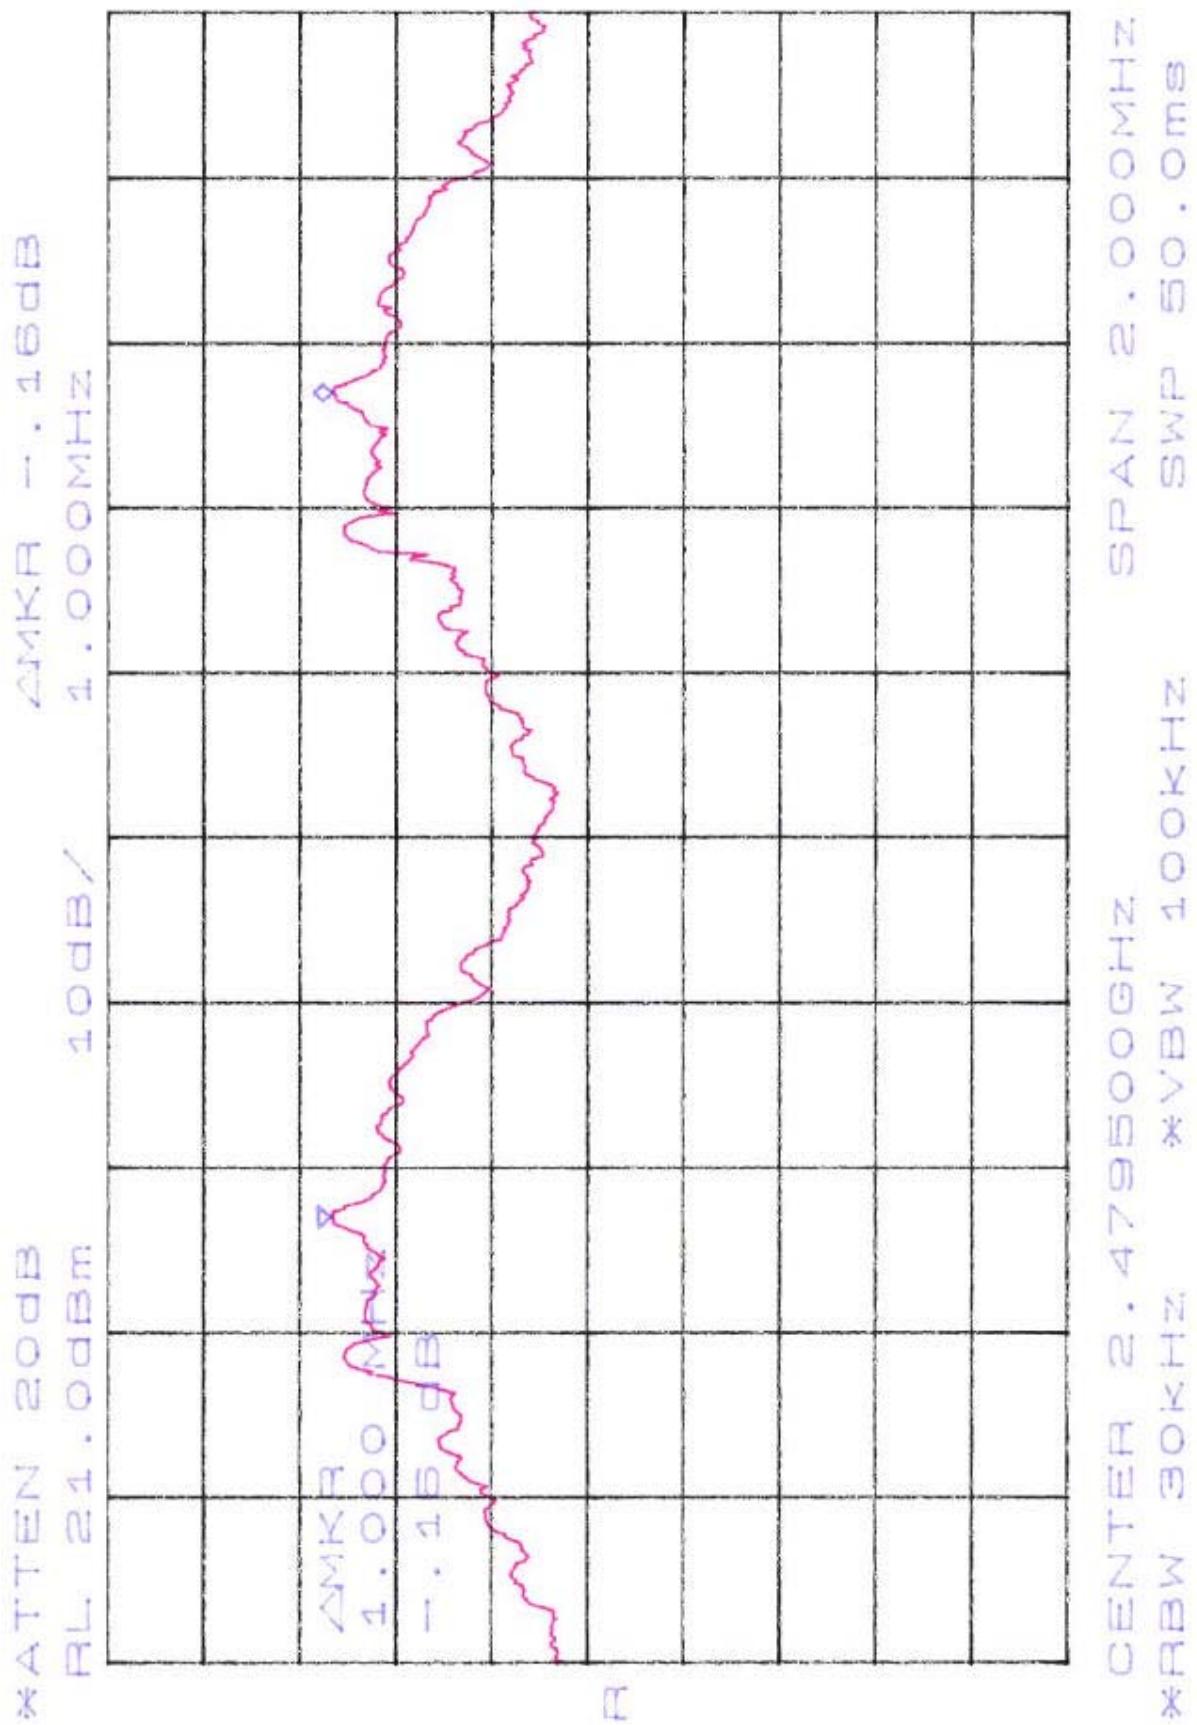



Appendix 2 : Plotted Data for Total Used Hopping Frequencies

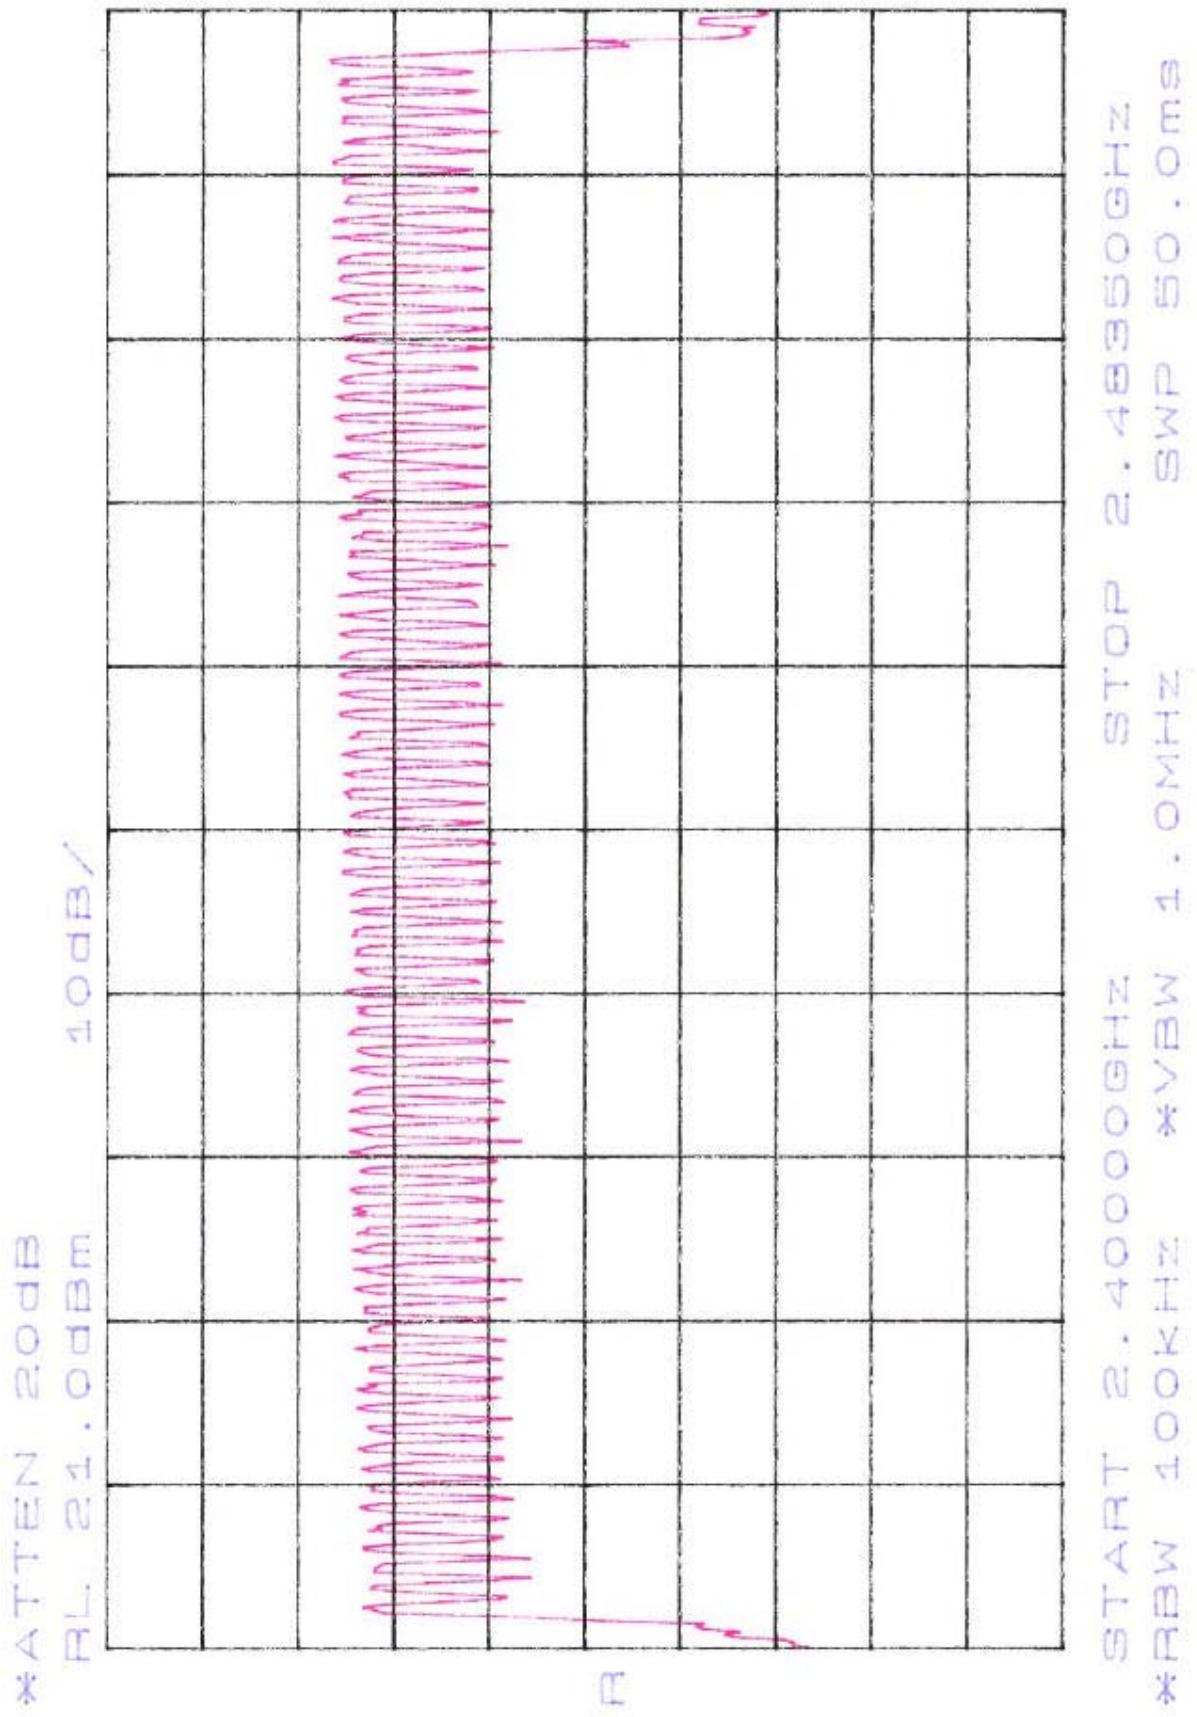


Appendix 3 : Plotted Data for Channel Bandwidth

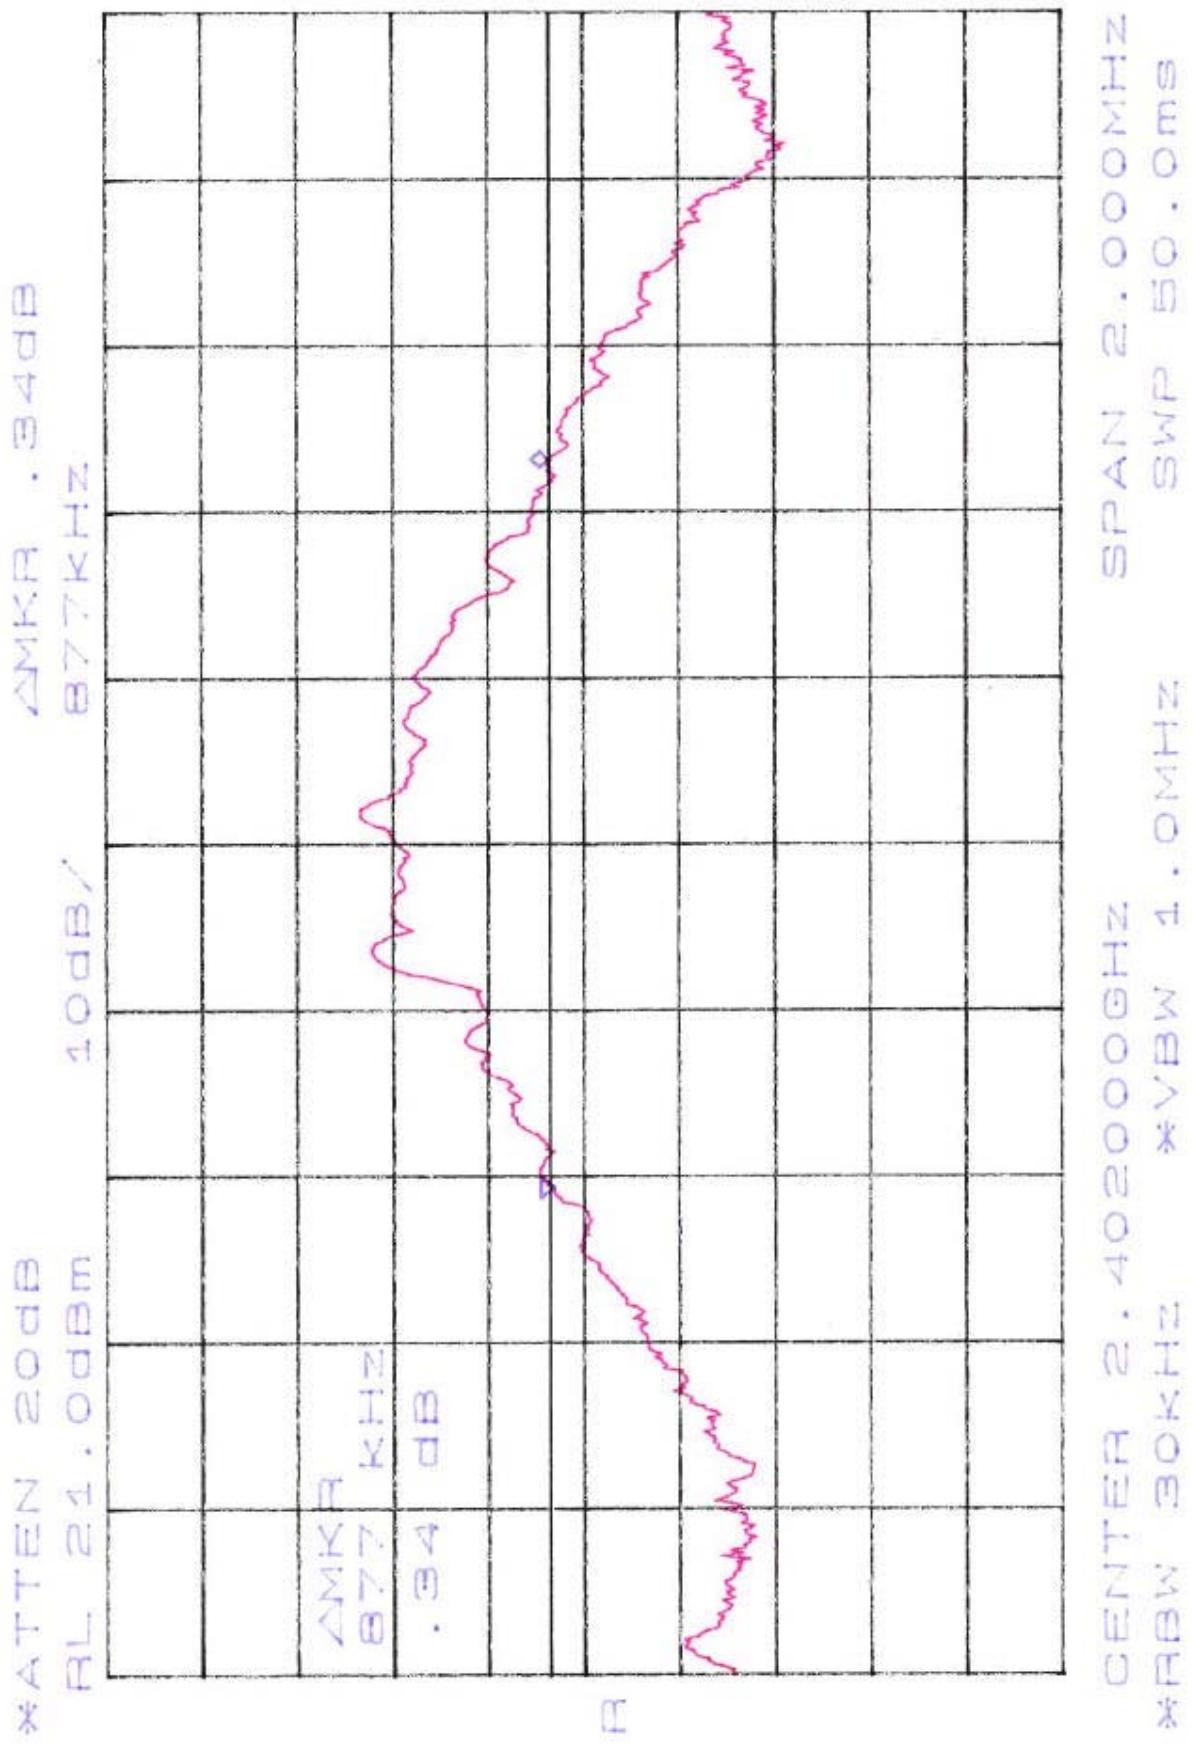


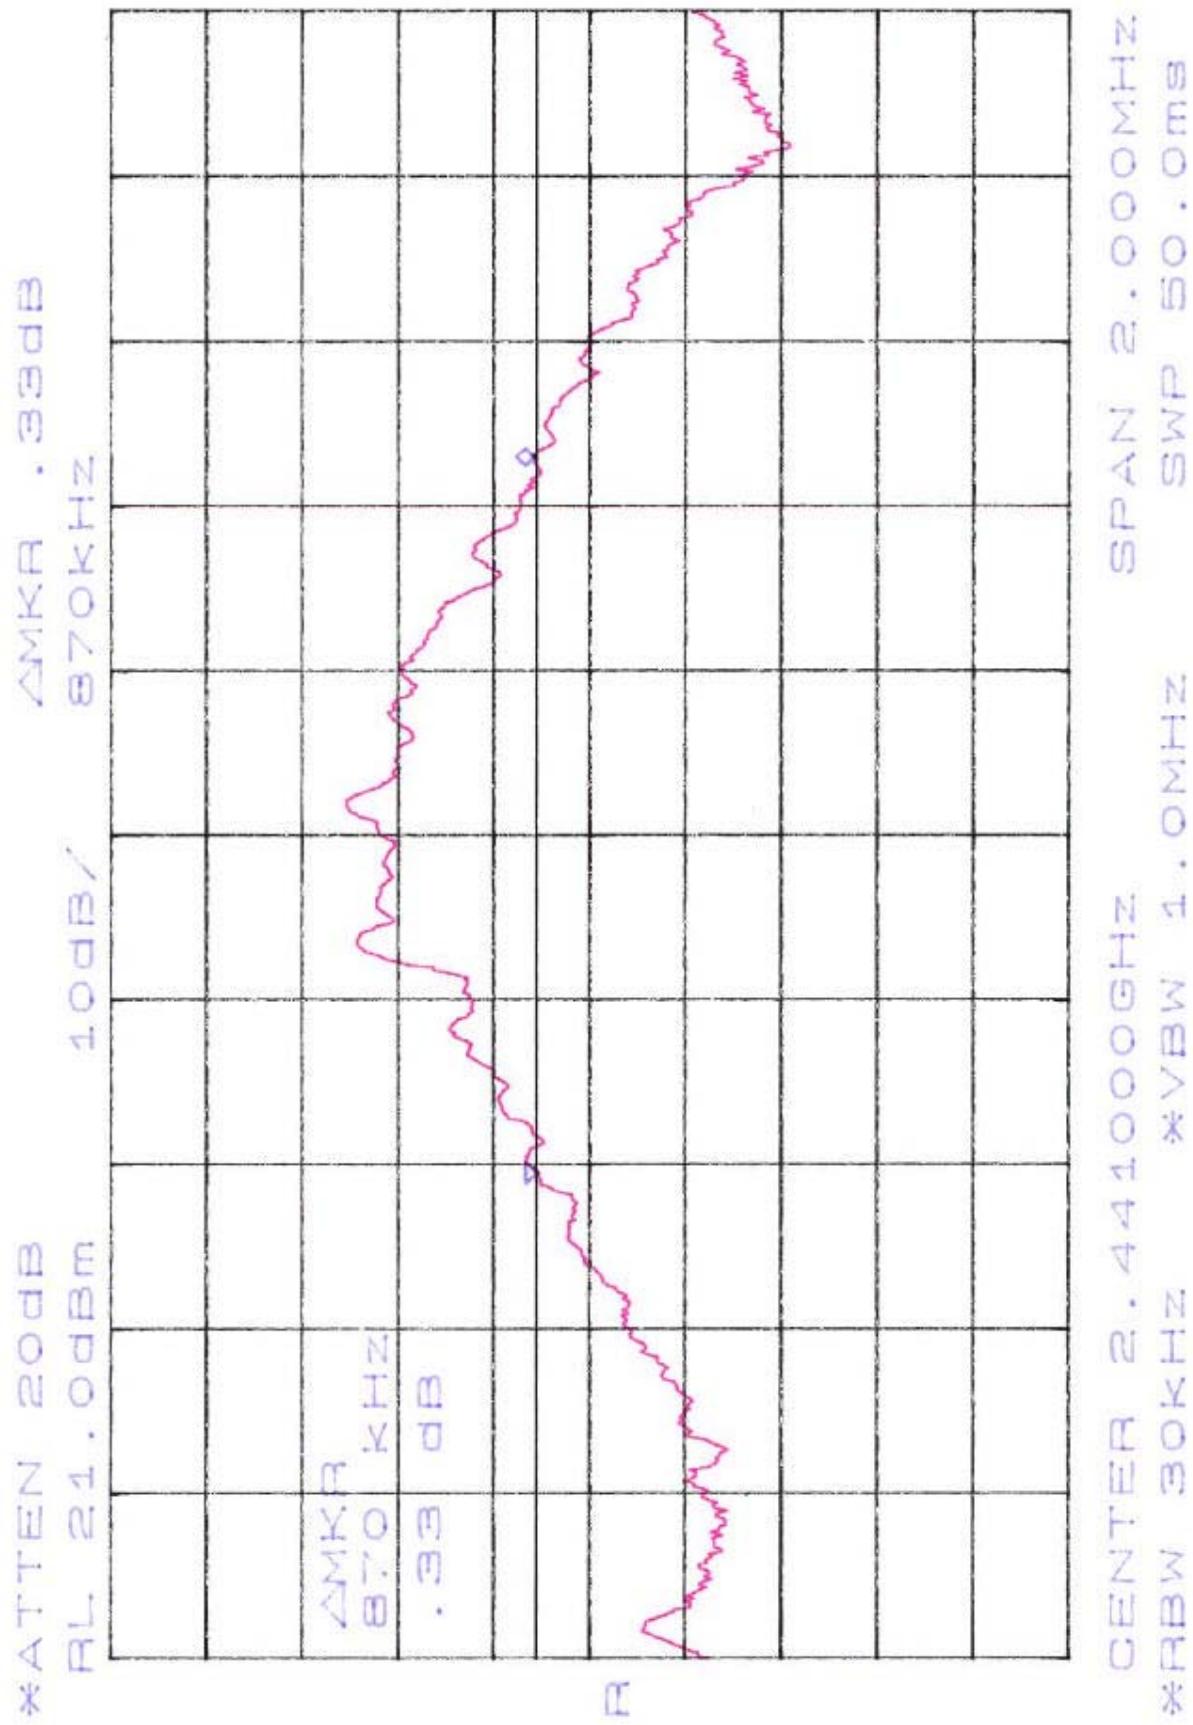


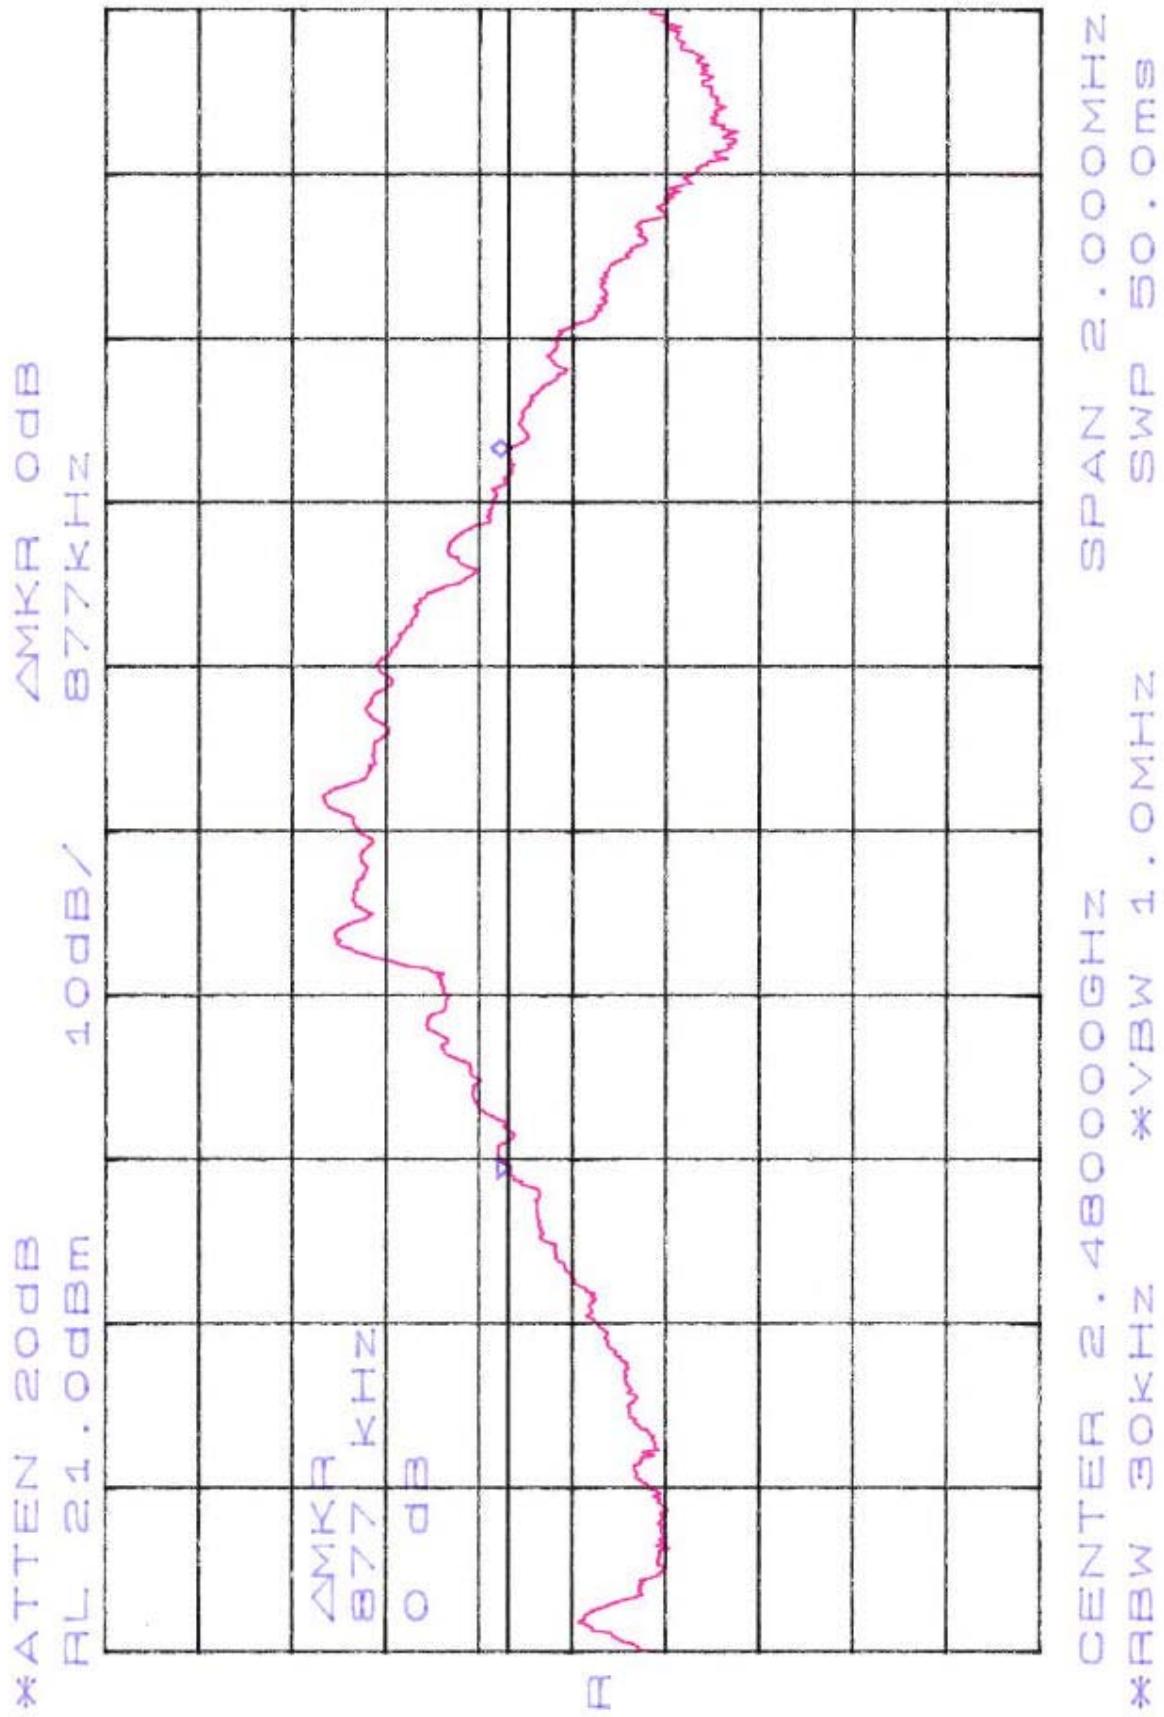



Appendix 4 : Plotted Data for Channel Dwell Time

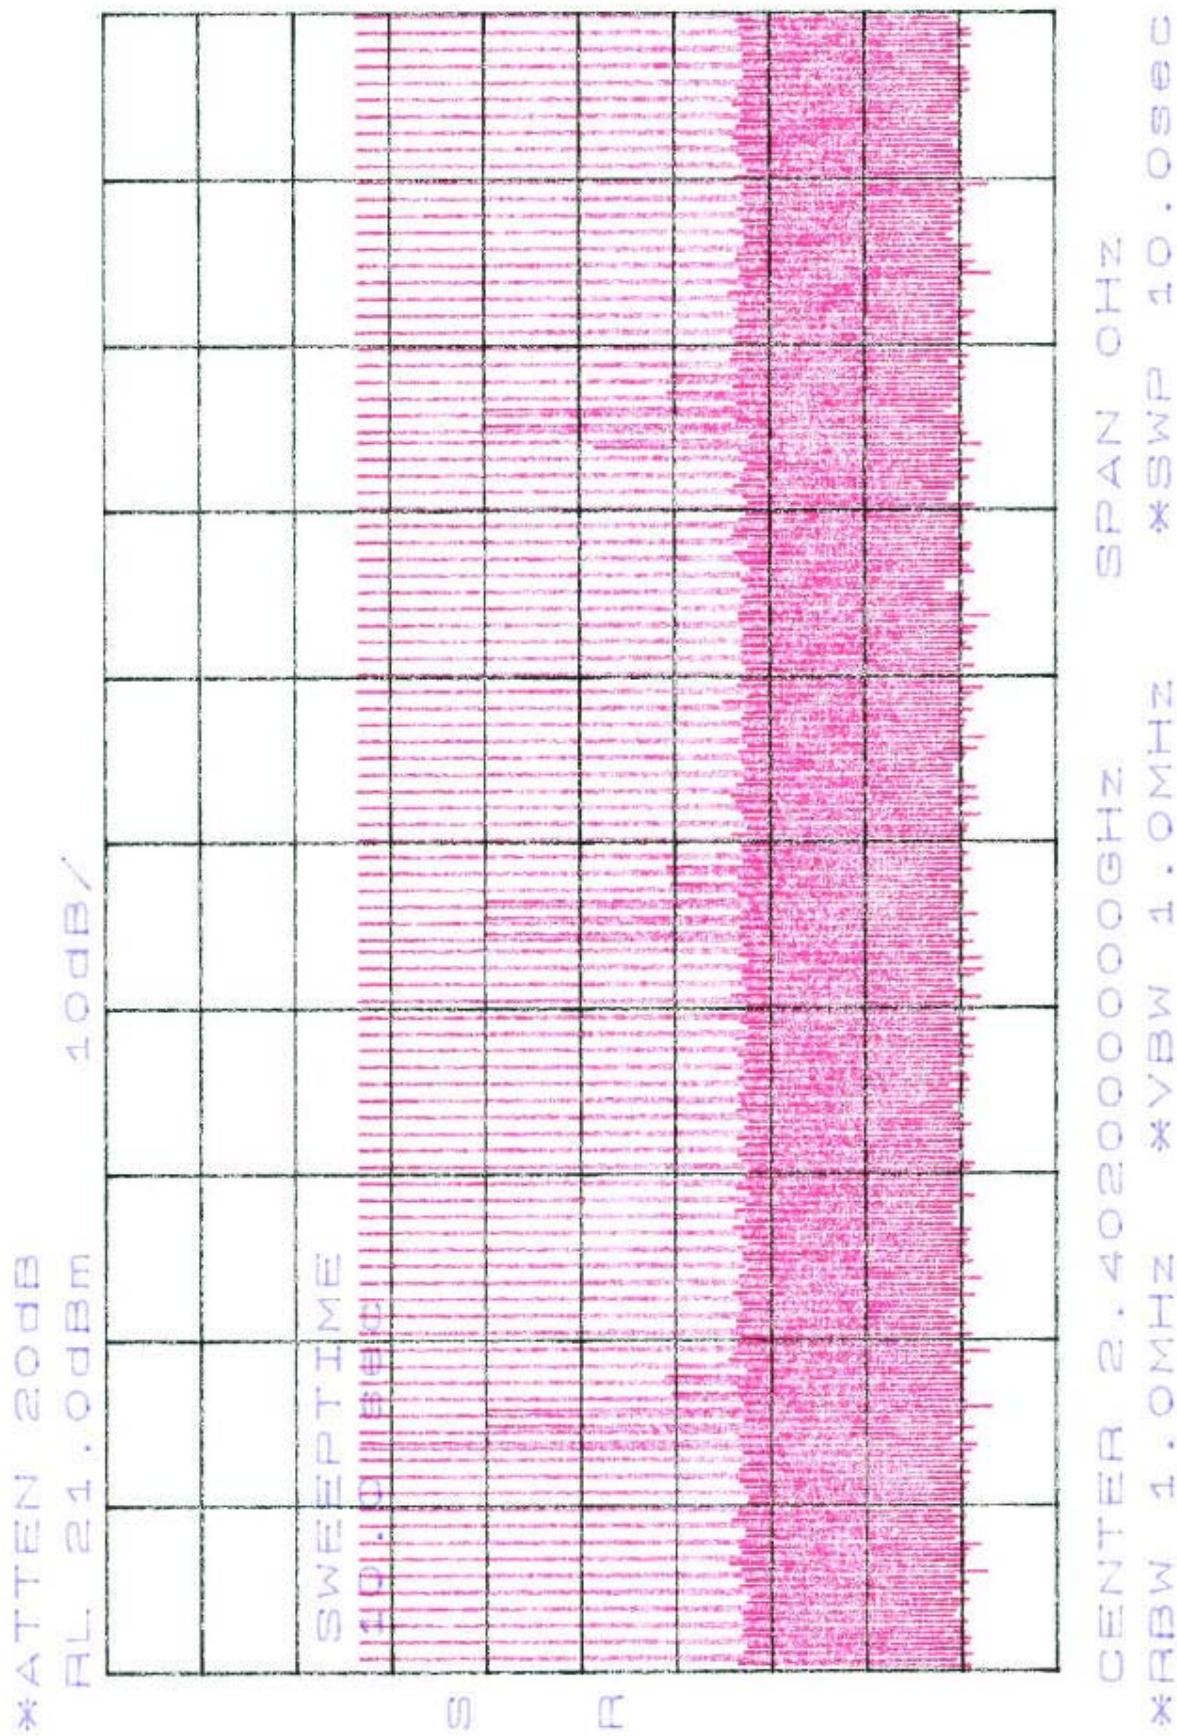


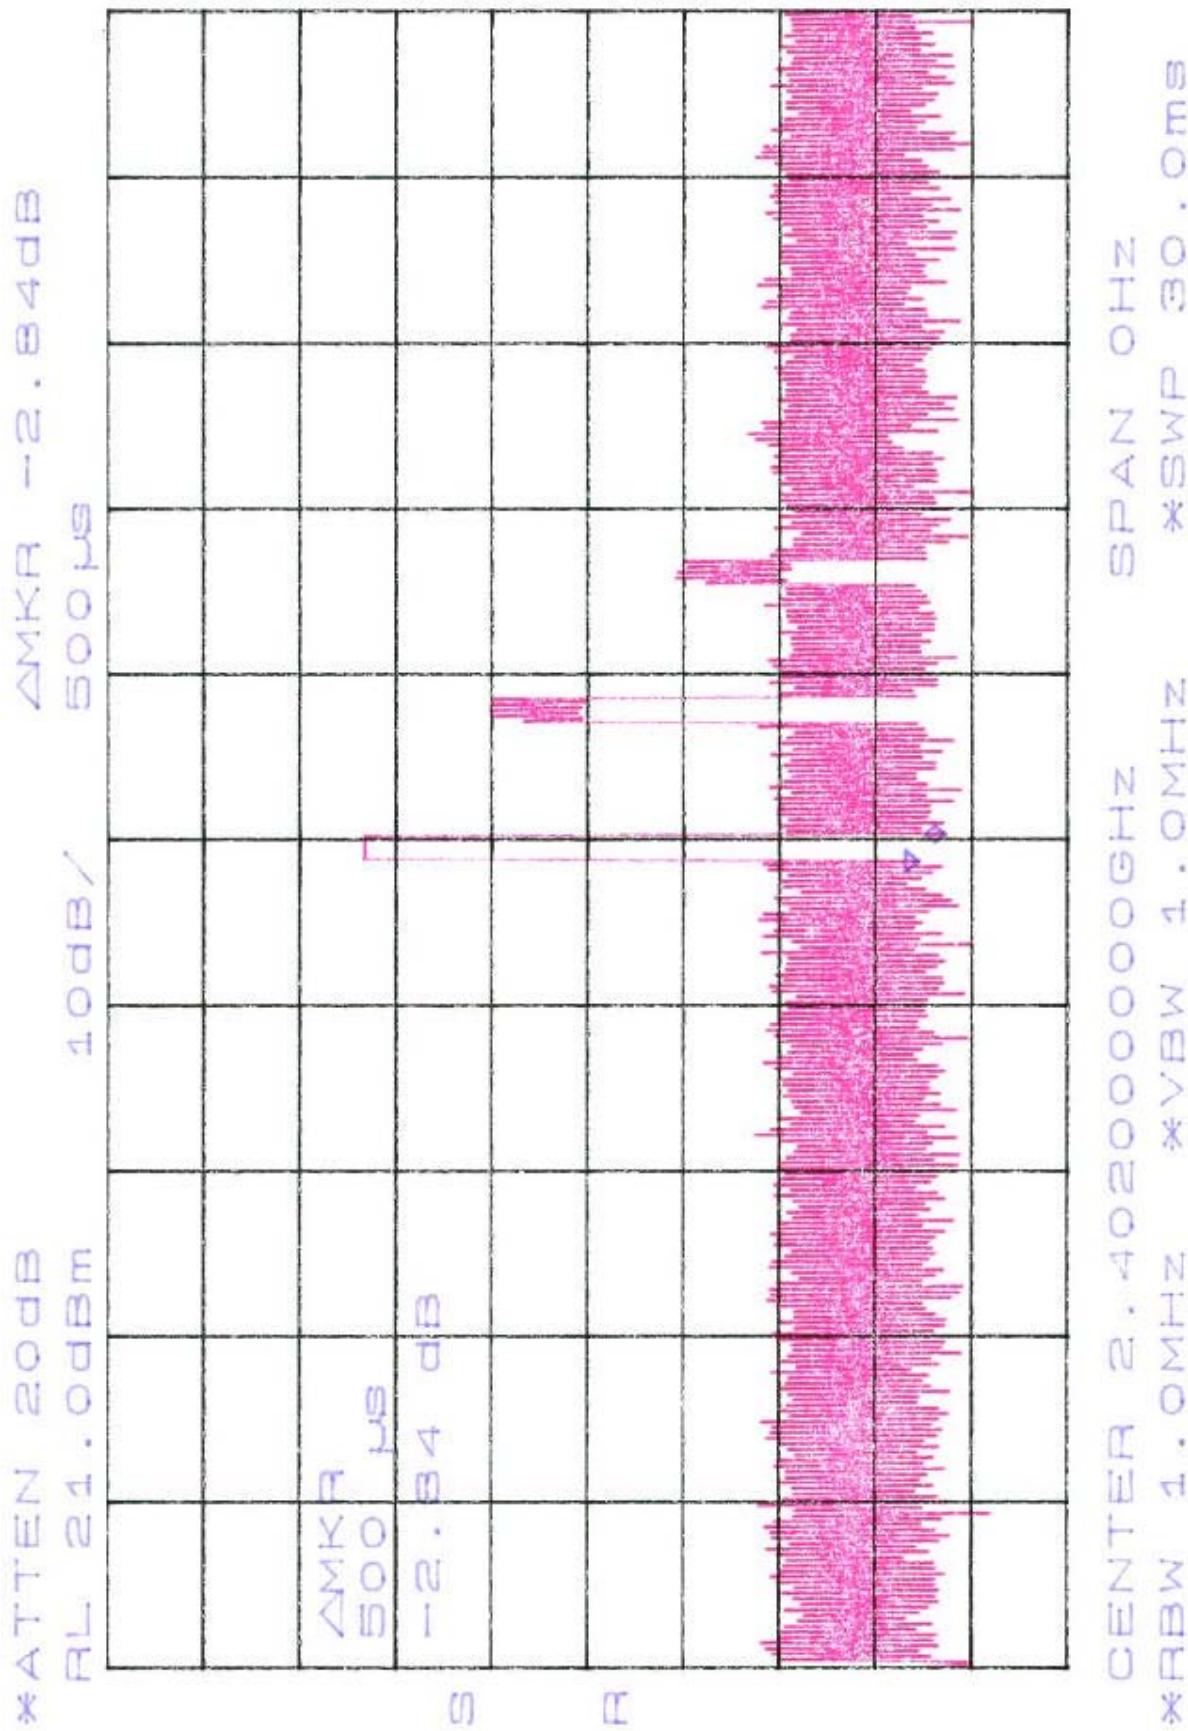

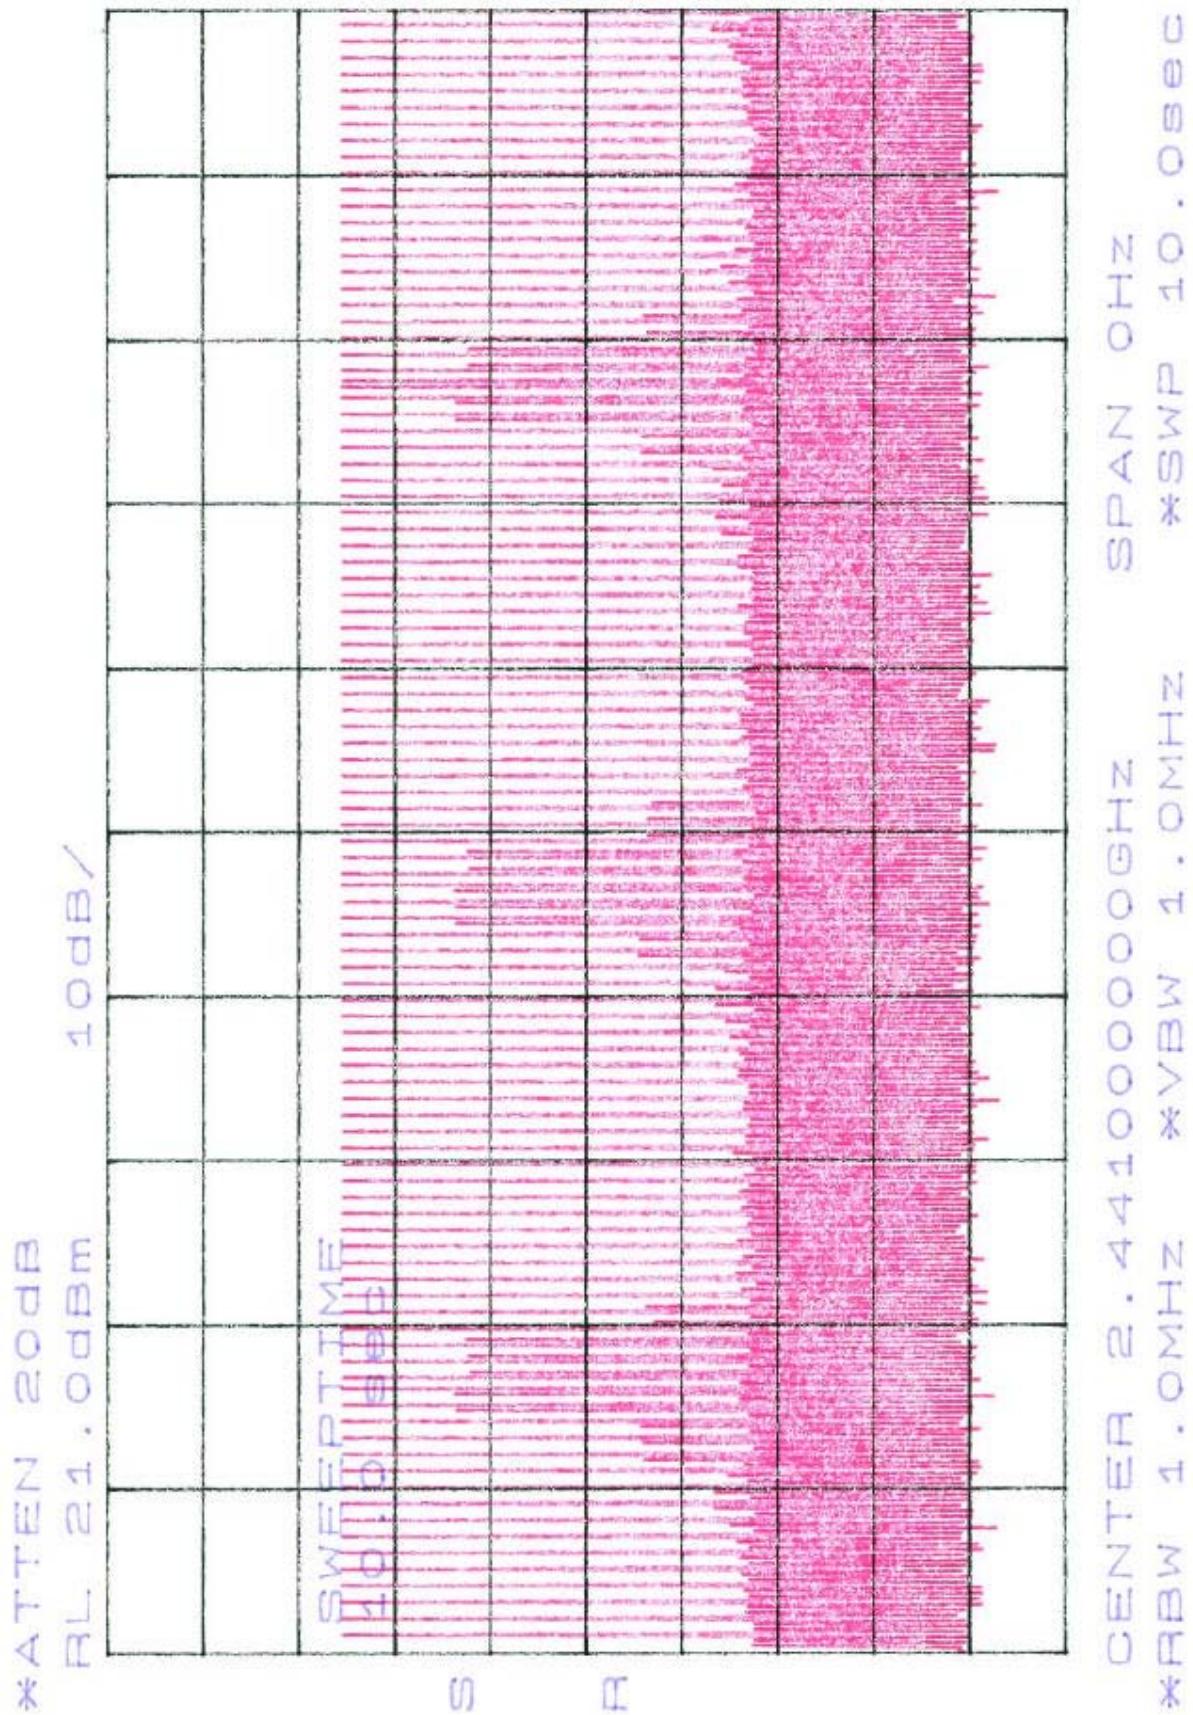


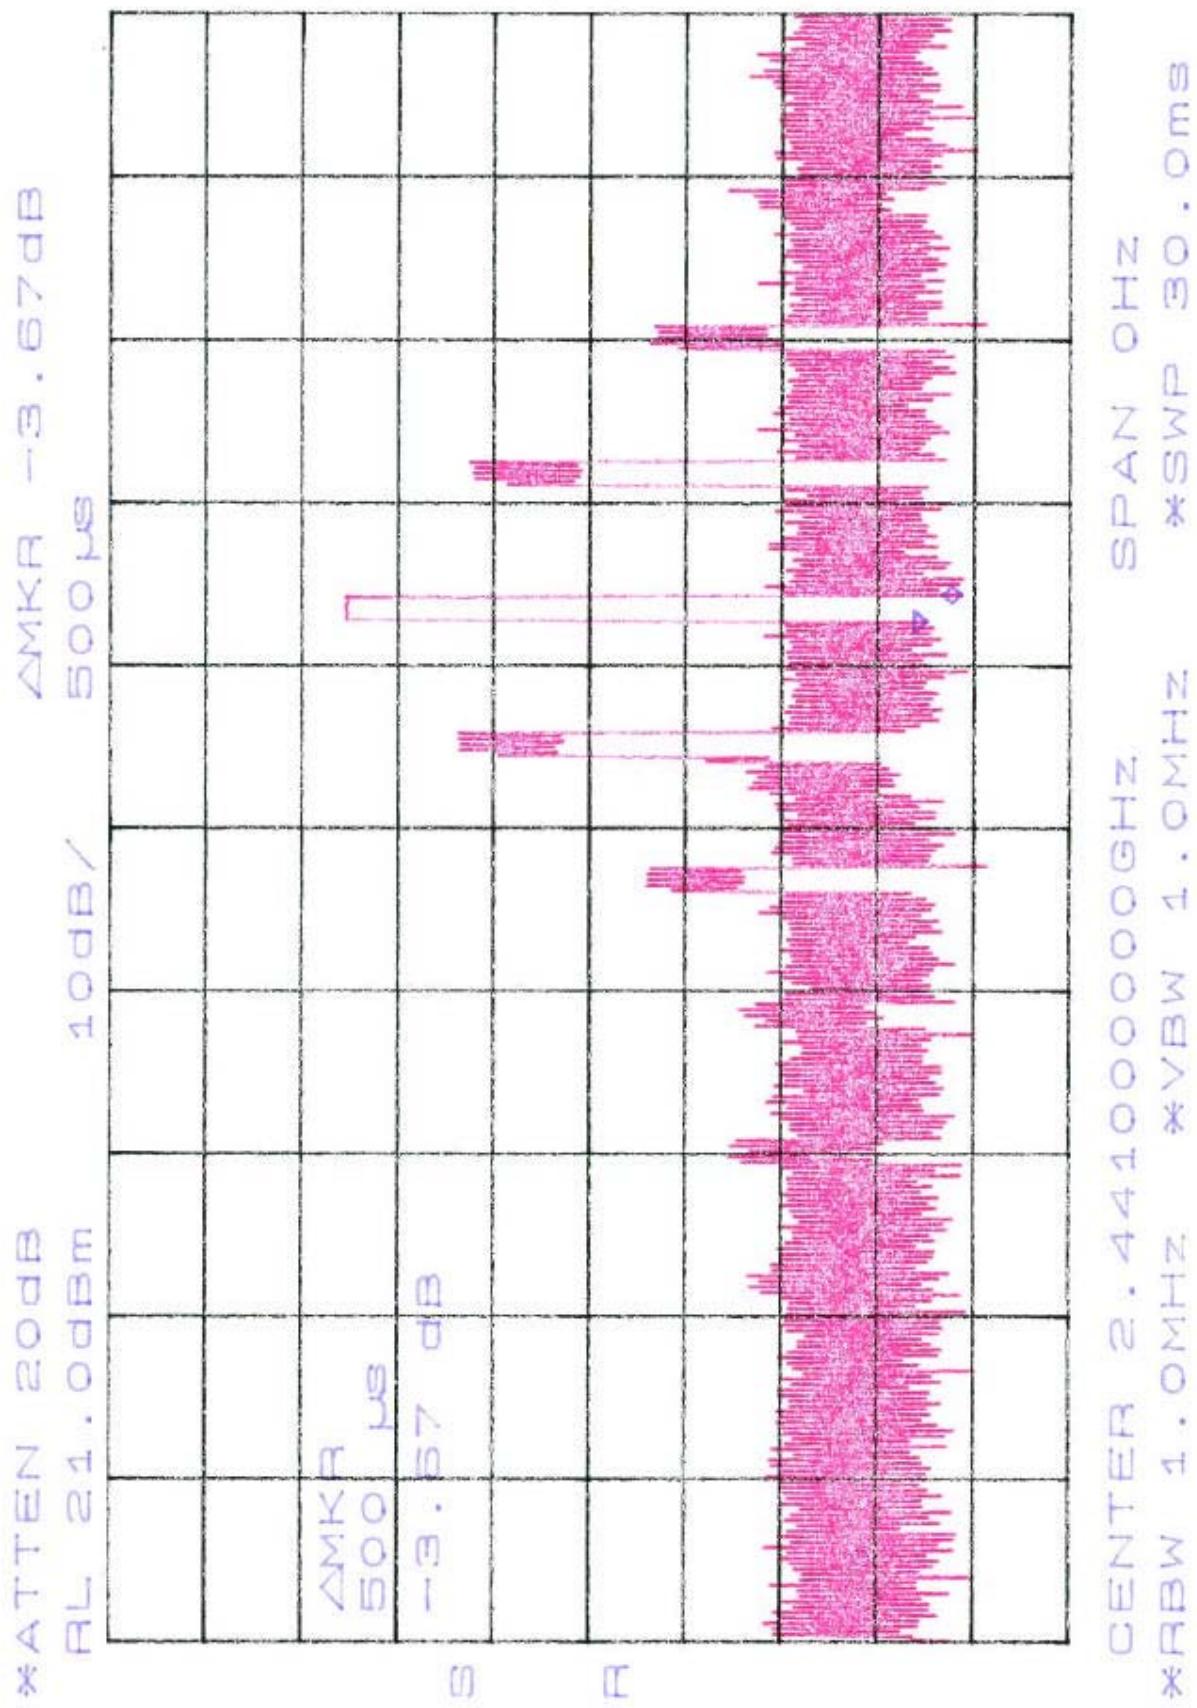


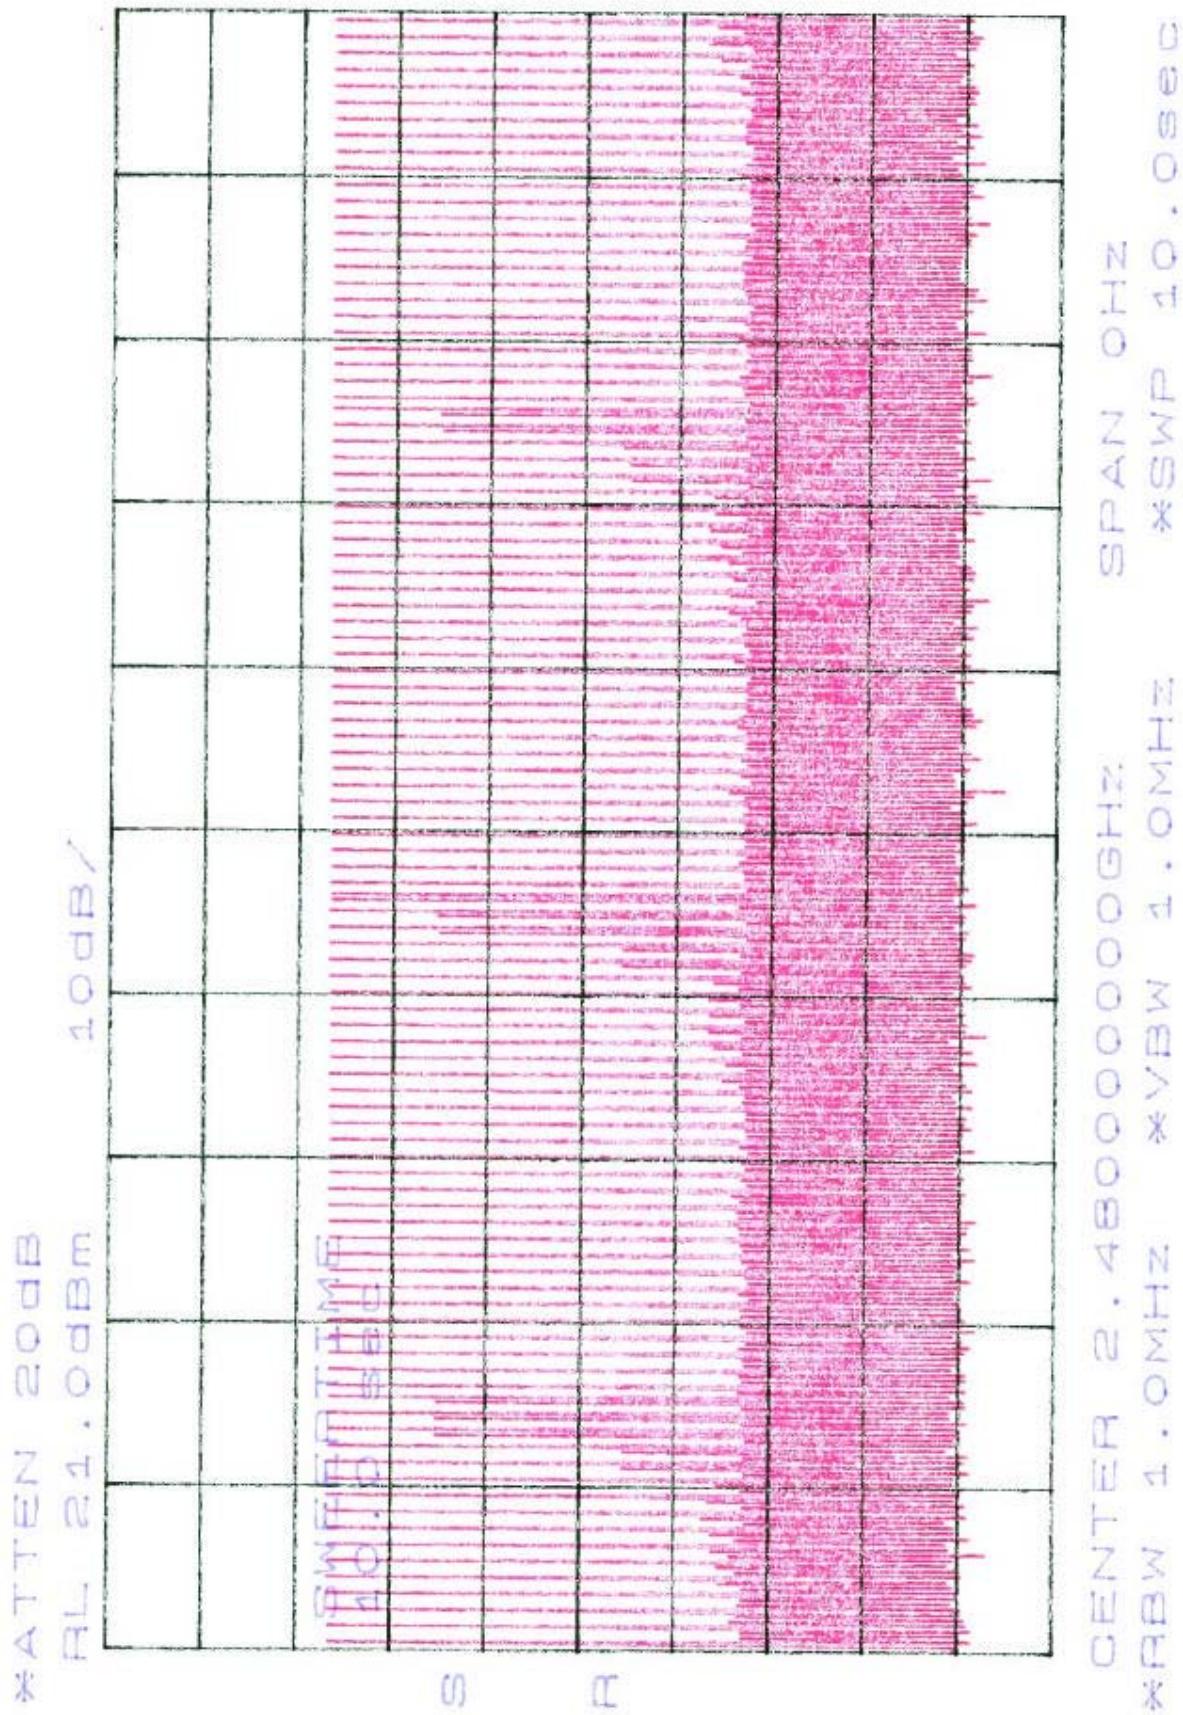


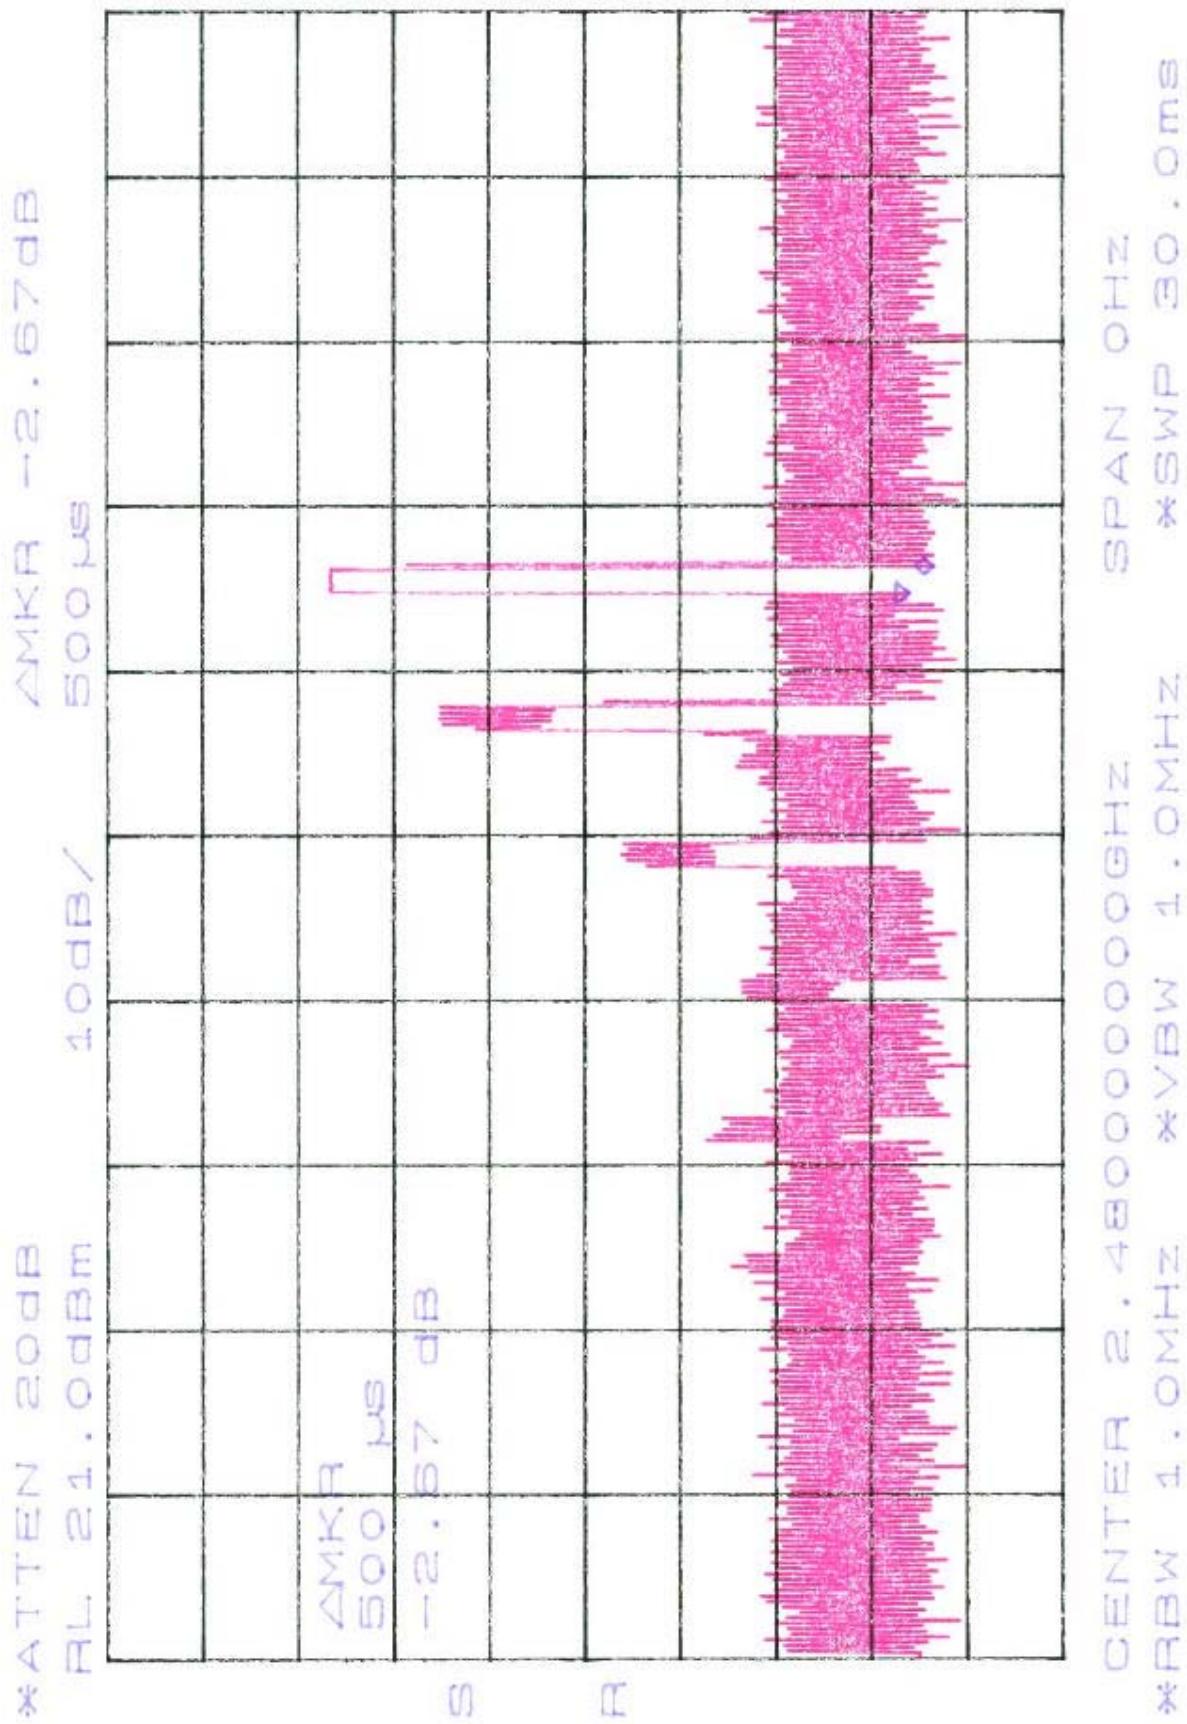


Appendix 5 : Plotted Data for Output Peak Power

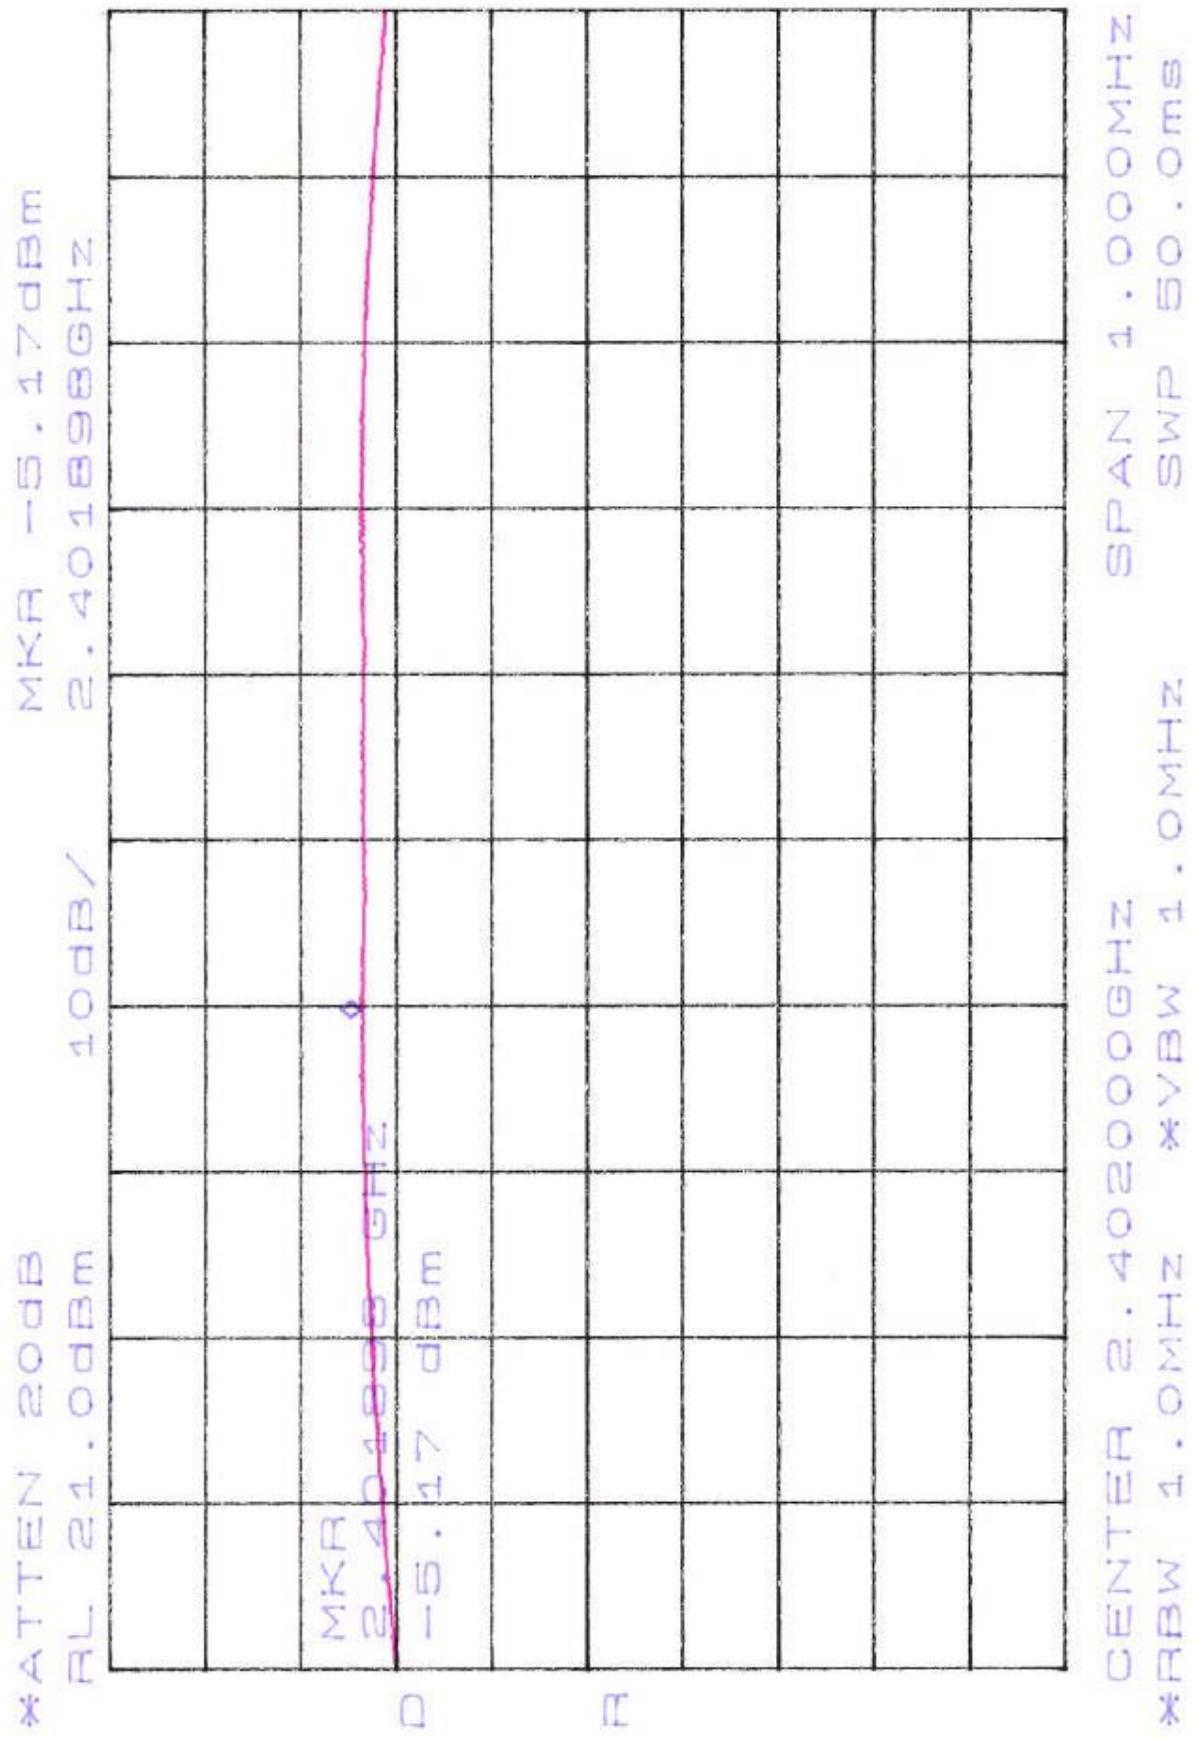


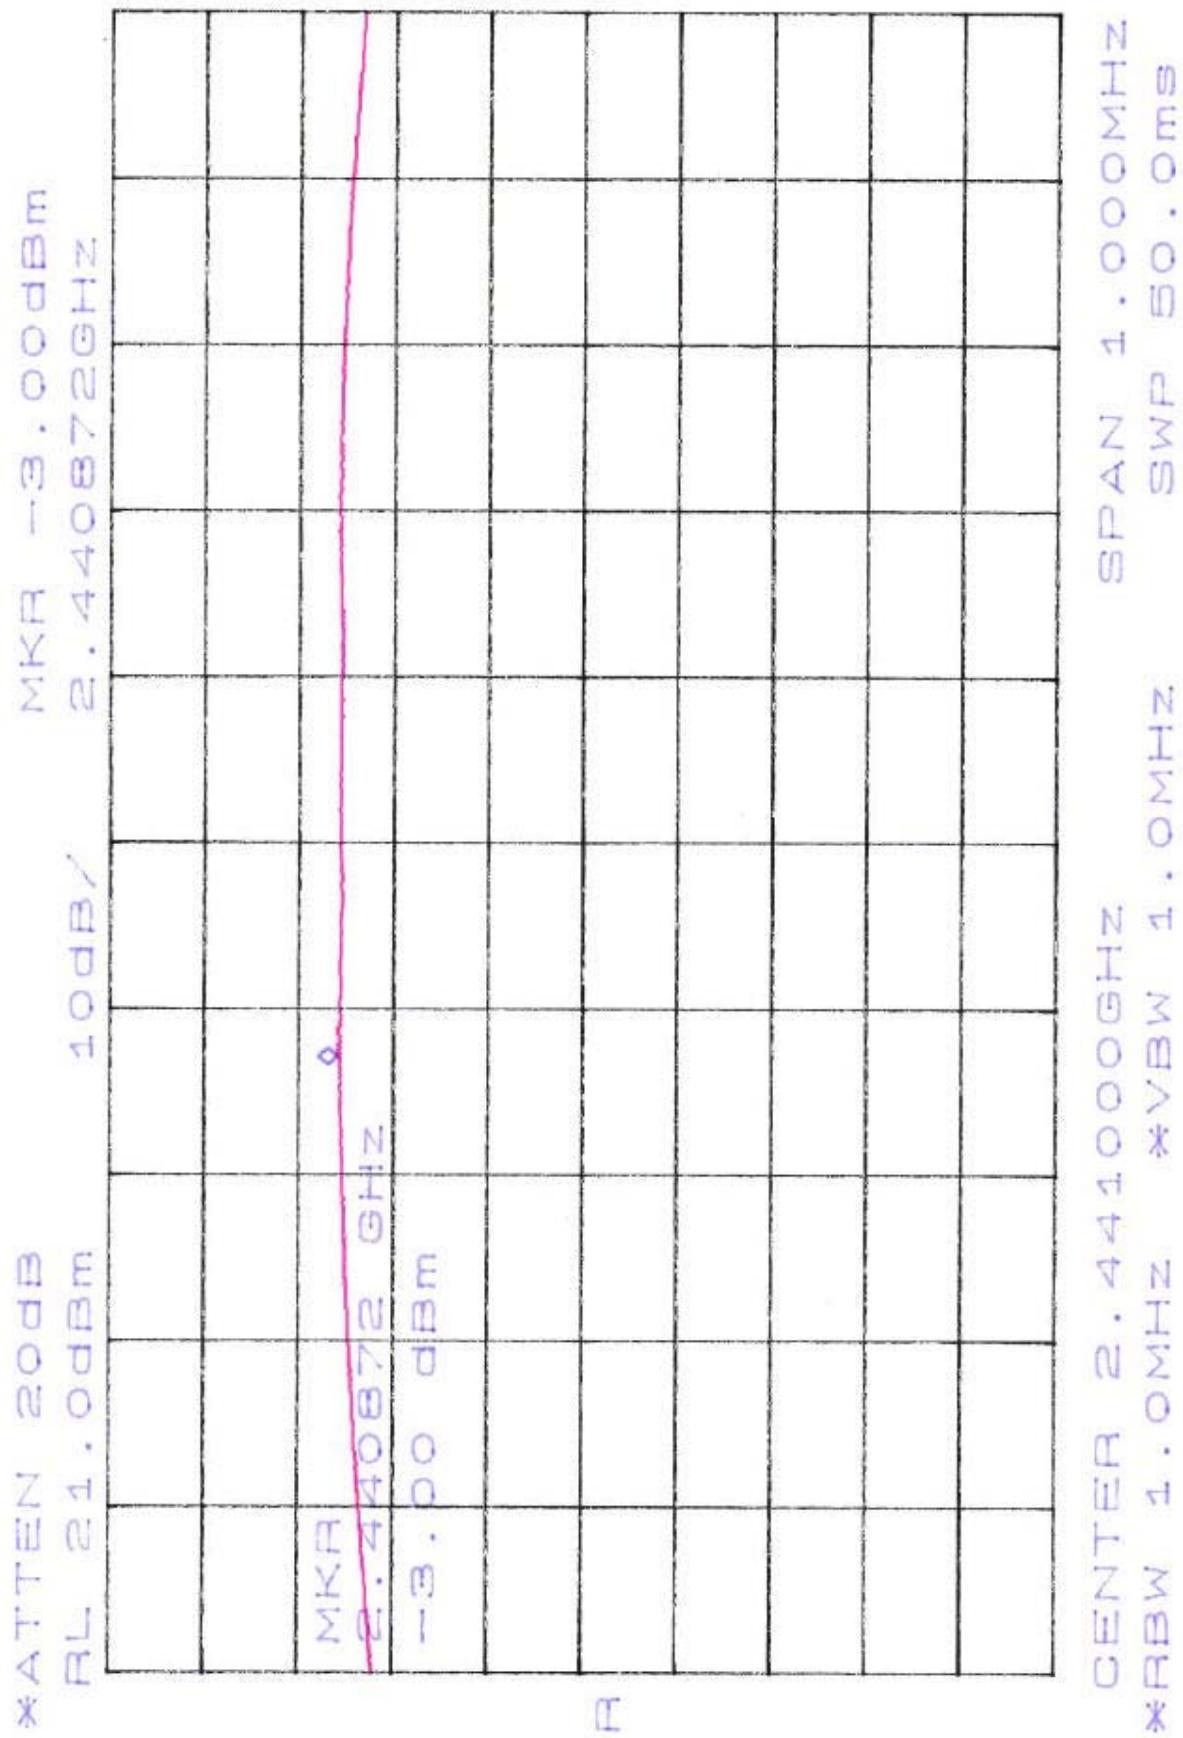

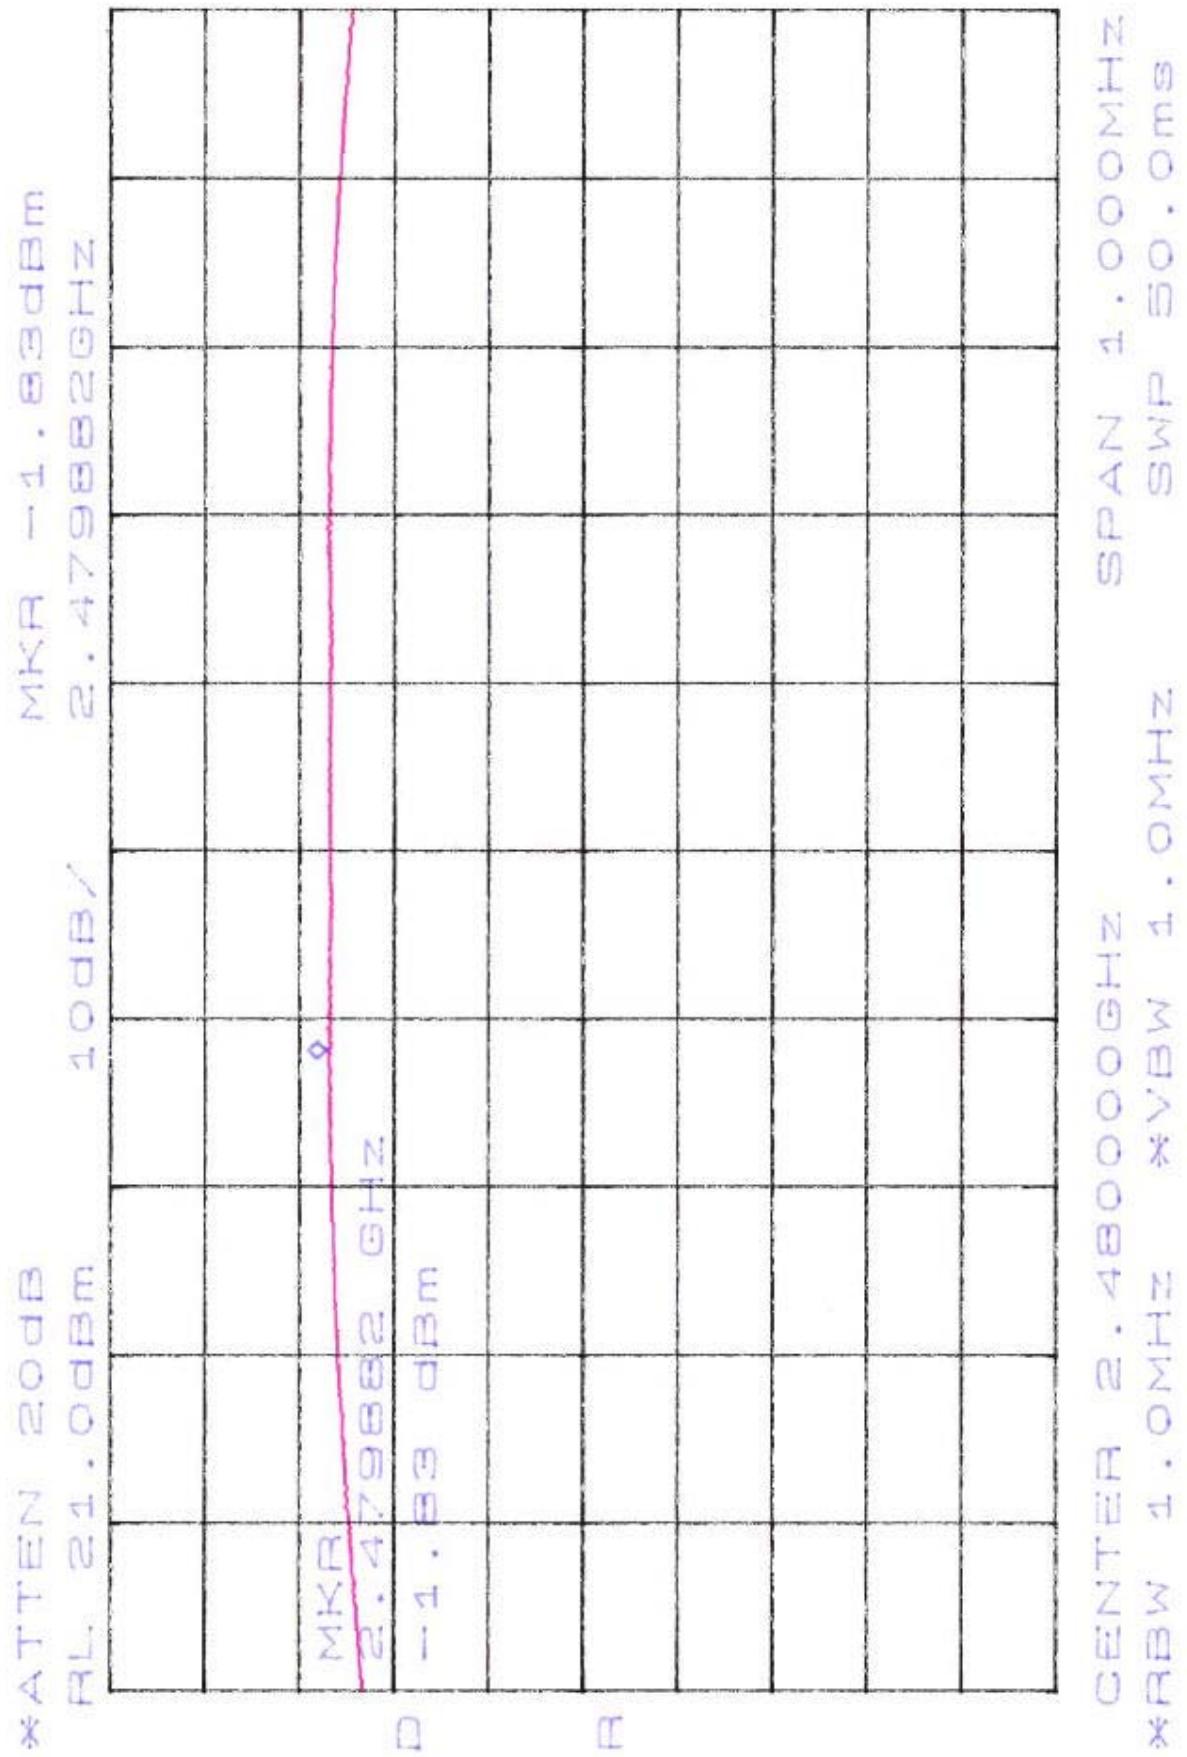


Appendix 6 : Plotted Data for 100 kHz Bandwidth from Band Edge

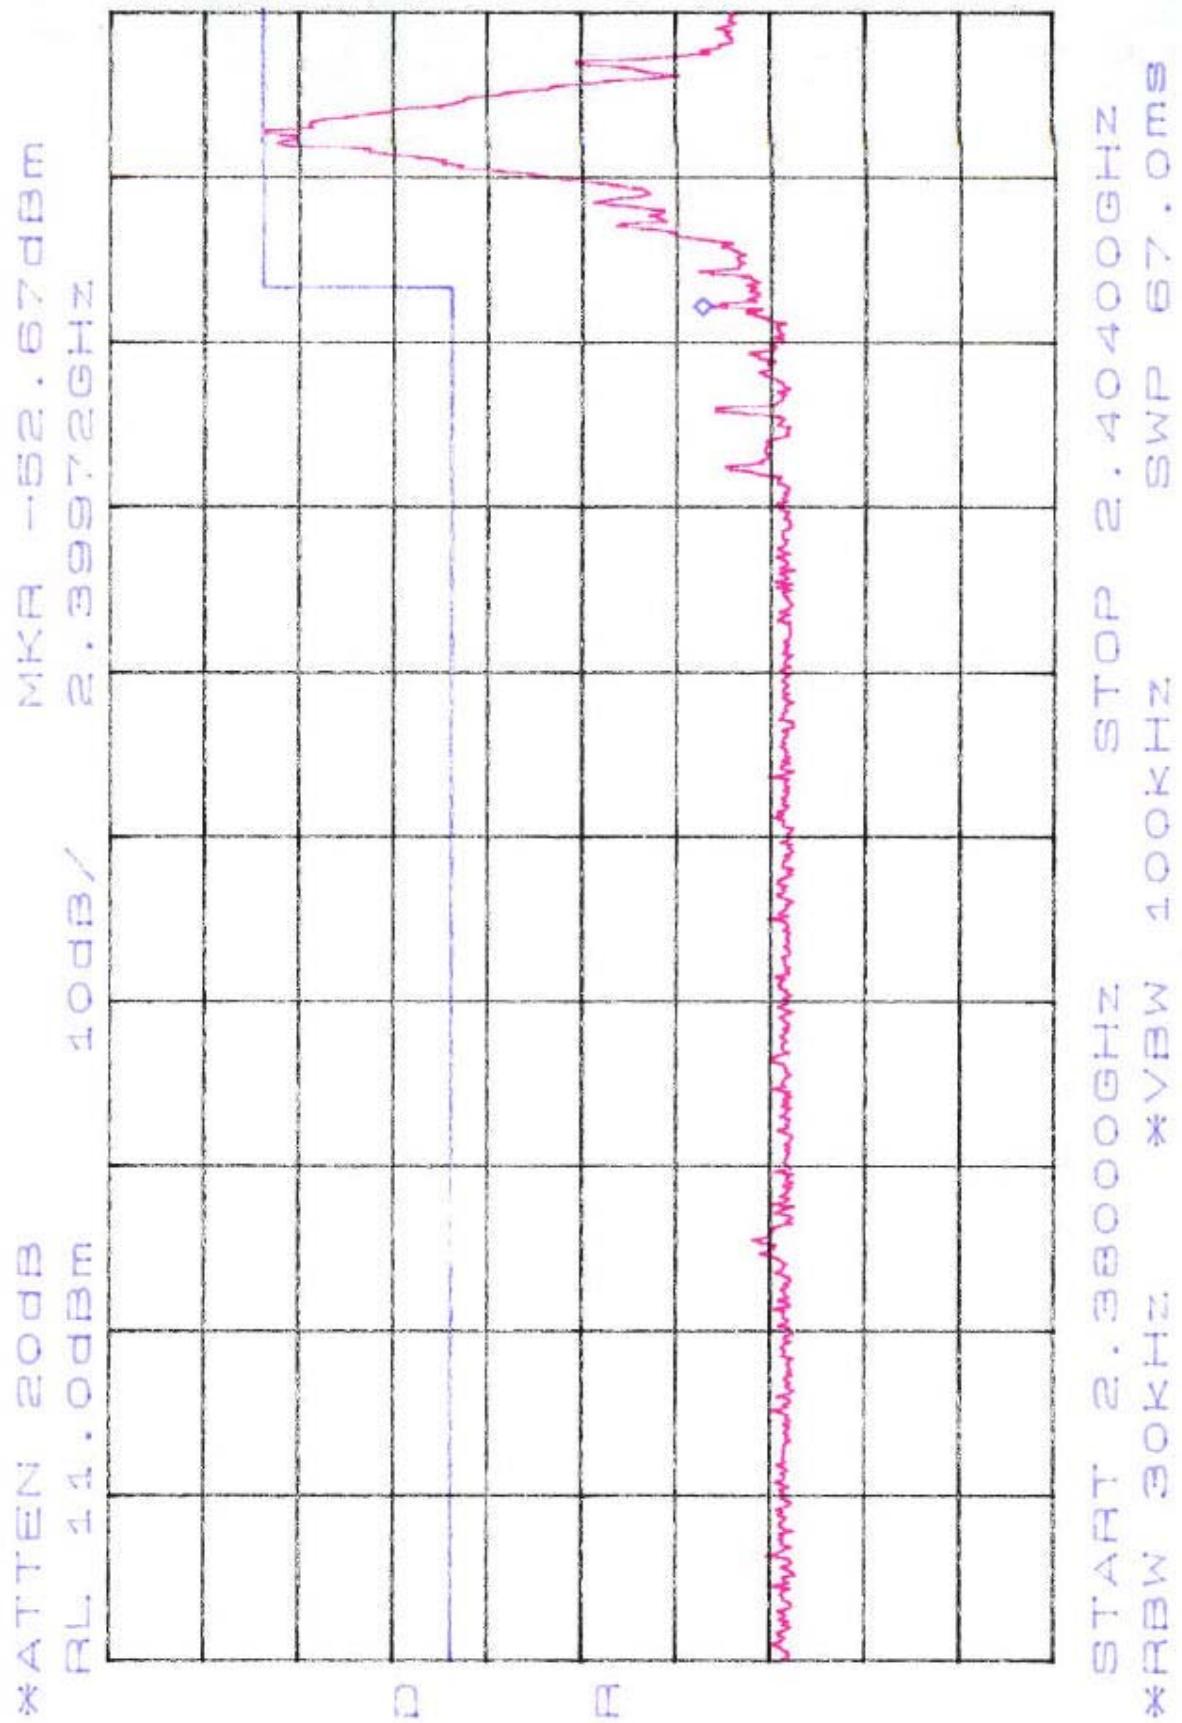

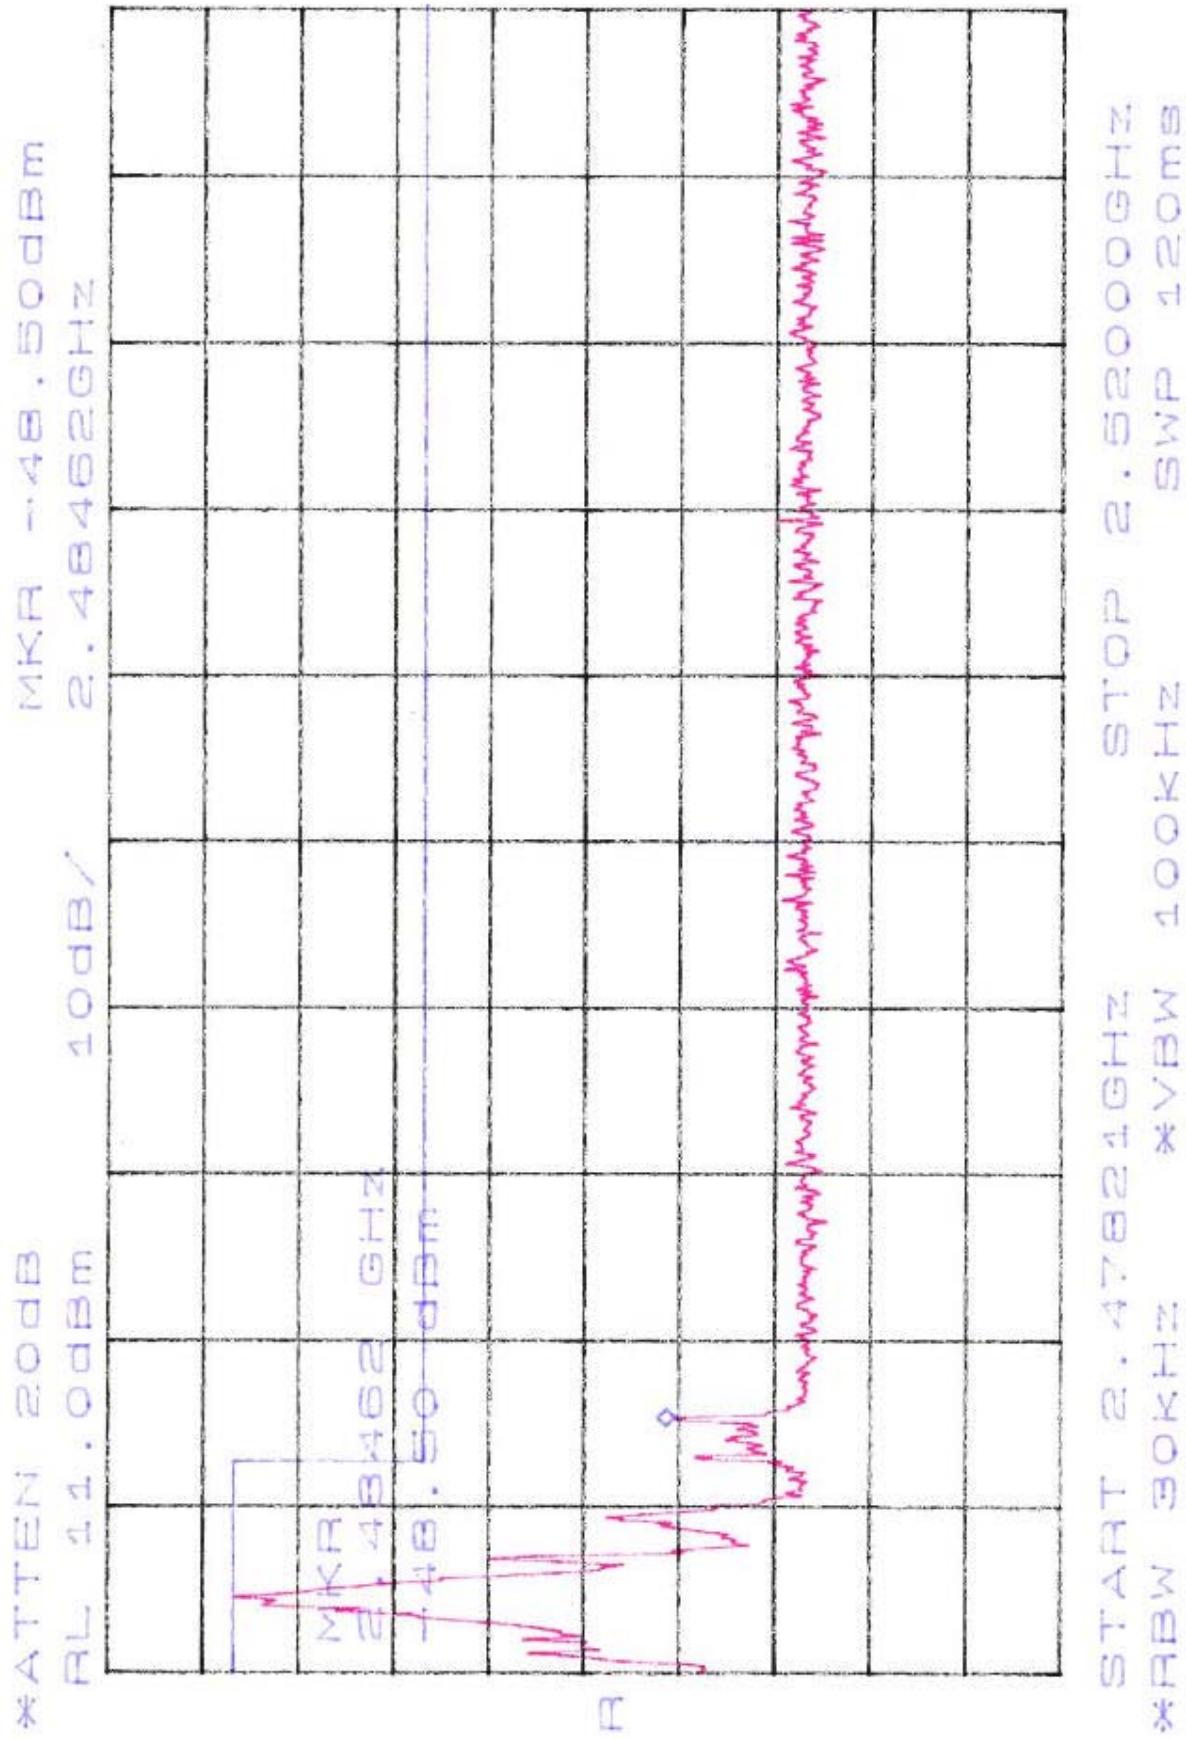

Appendix 7 : Plotted Data for Out-of-Band Conducted Emission

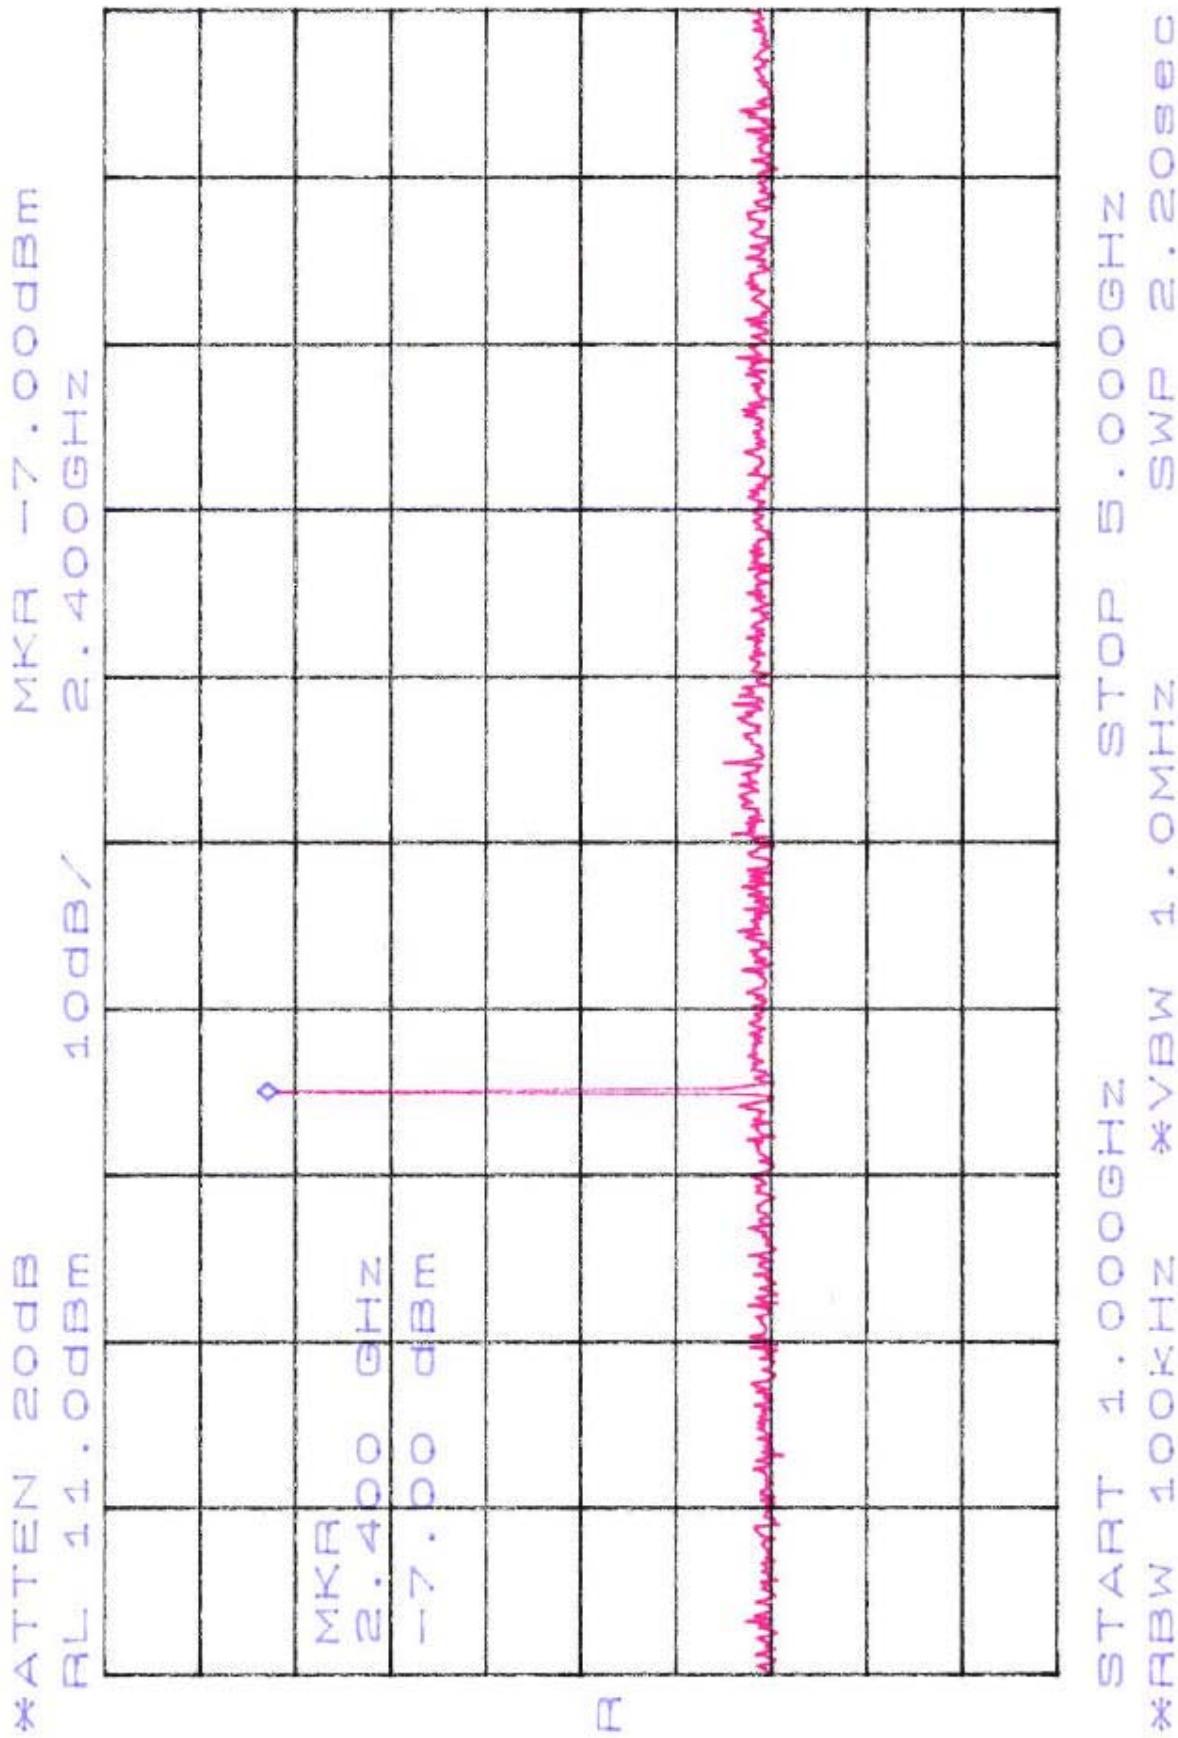

*ATTEN 20dB

RL -42 . 00dBm

40dB /


MKR -47 . 00dBm


23 . 97GHz


MKR
23 . 97 GHz
-47 . 00 dBm

E


START 5 . 00GHz
STOP 25 . 00GHz
RBW 4 . 00MHz
SWP 4 . 00GHz

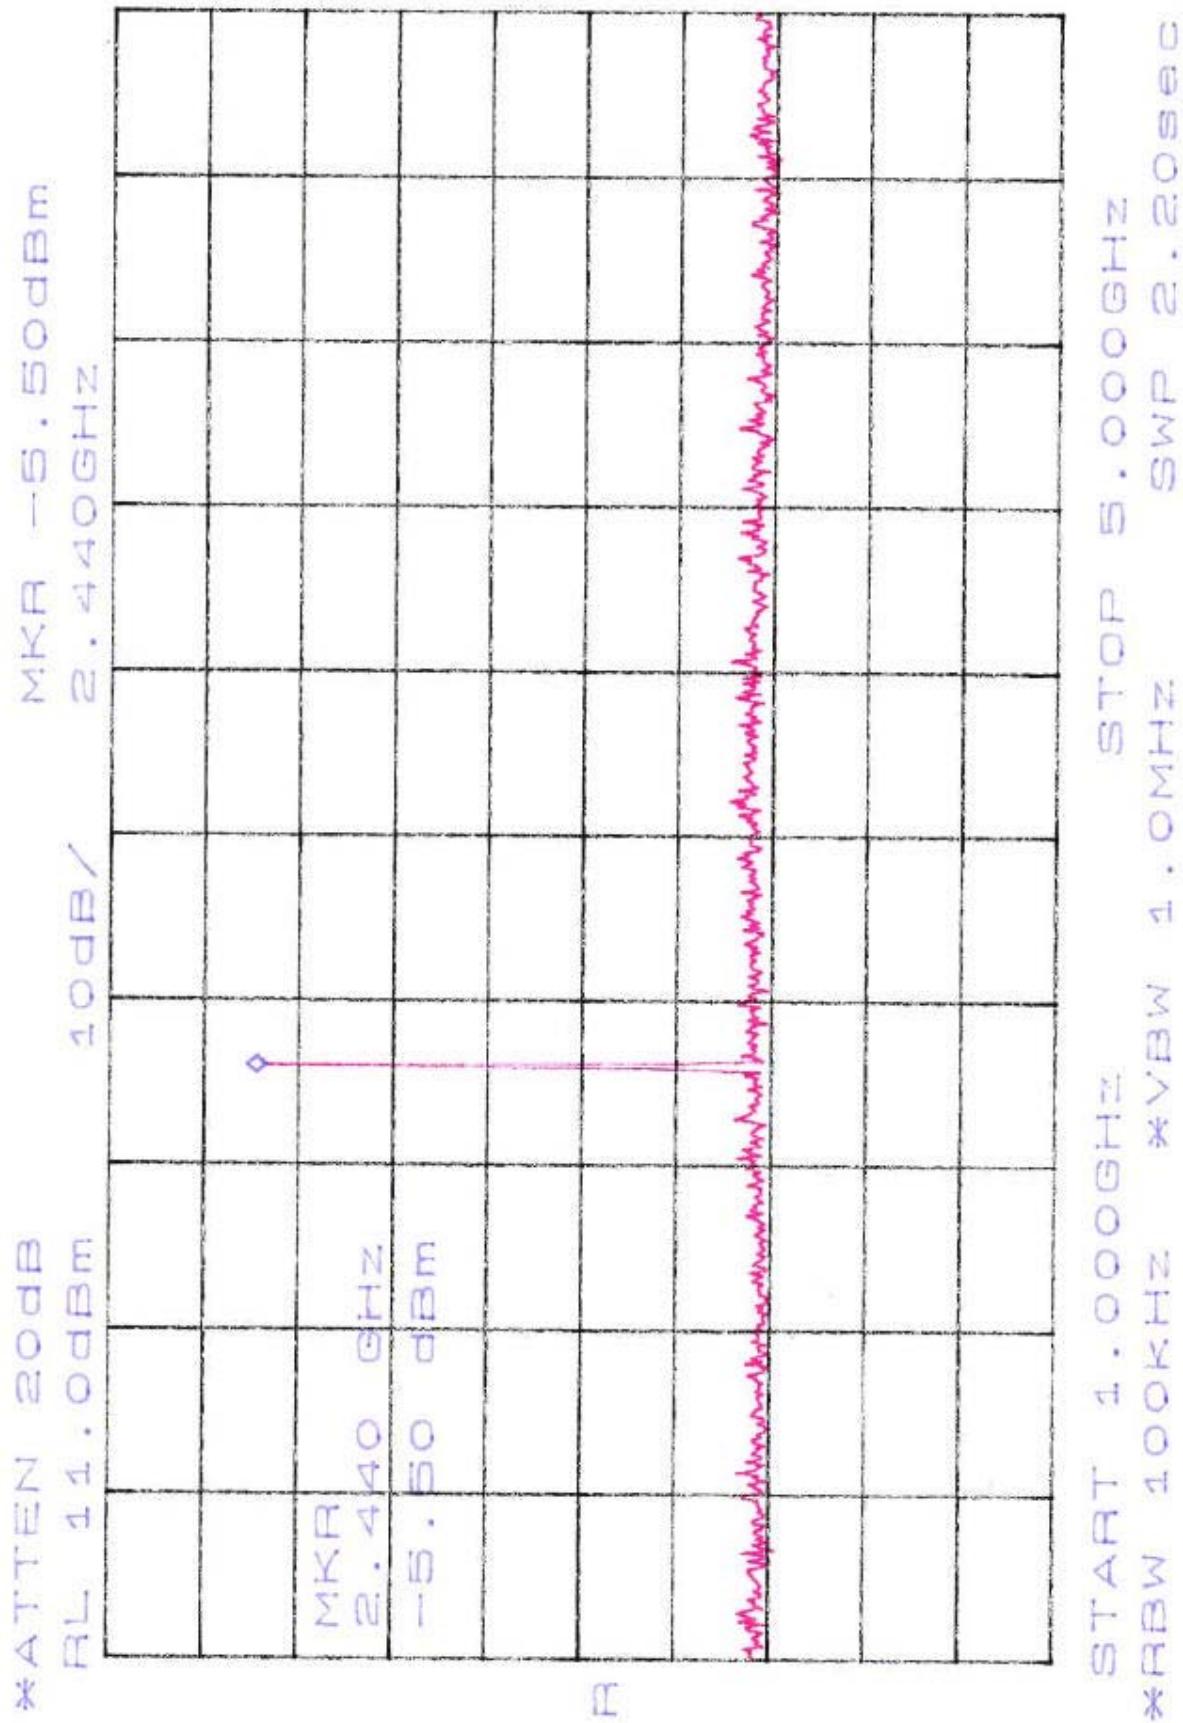

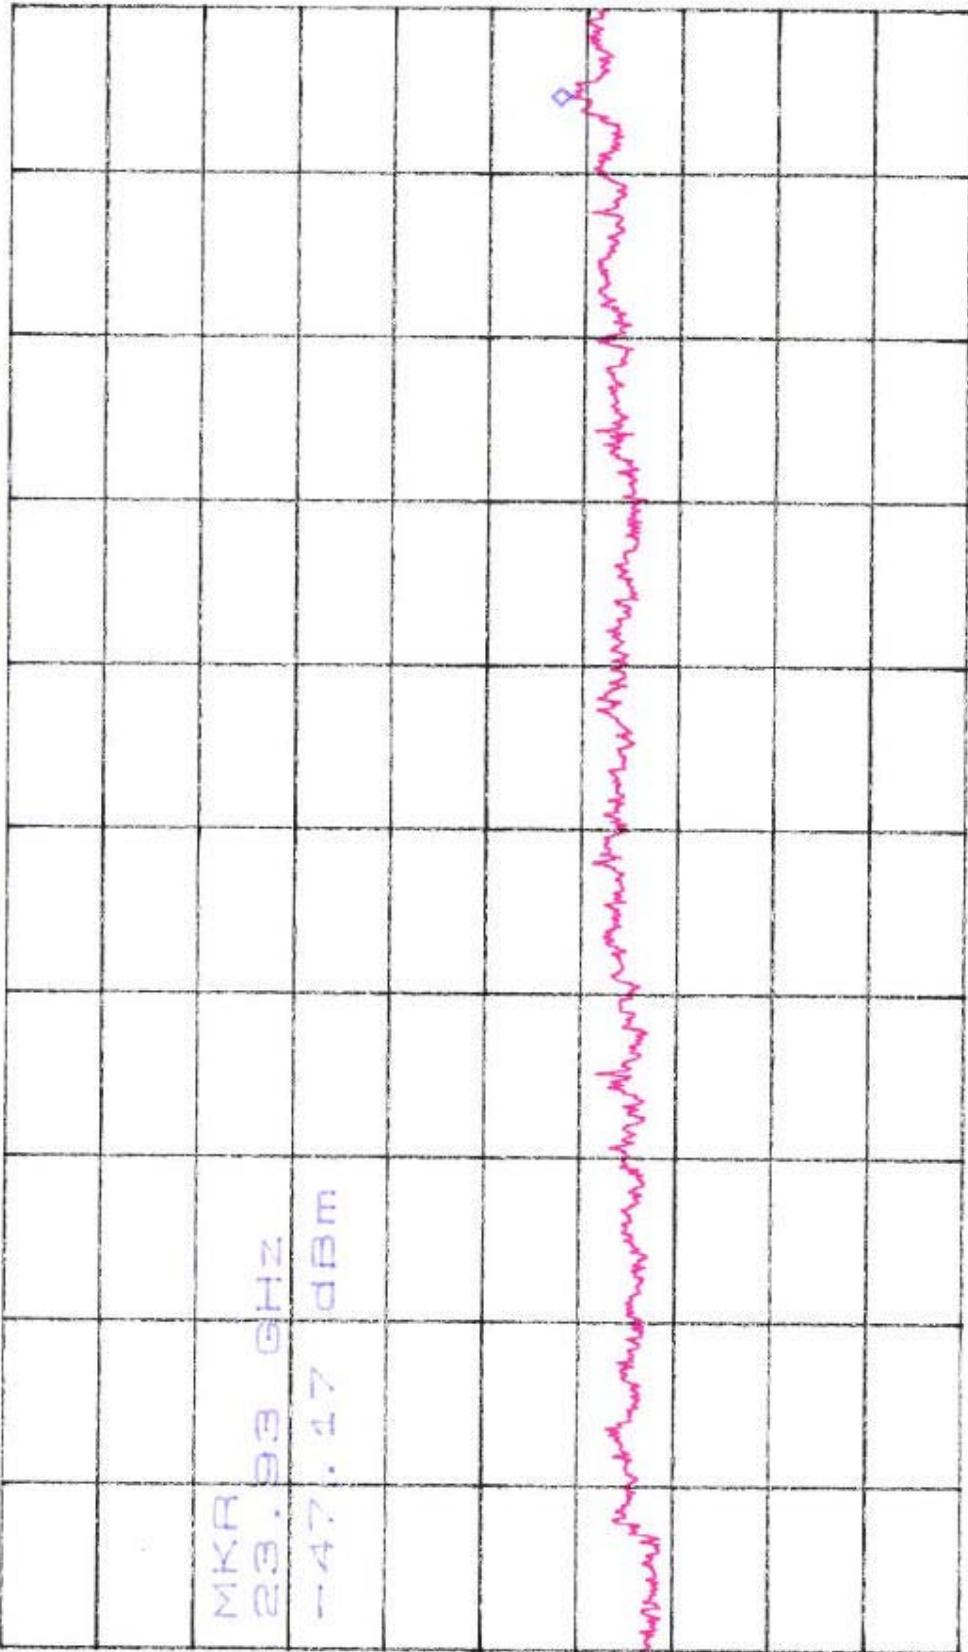MFR -47.4dB
23.999HzATTEN 20dB
FL 44.0dBSTART BW 400KHz STOP BW 4.0MHz
40dB / 10dB MFR -47.4dB

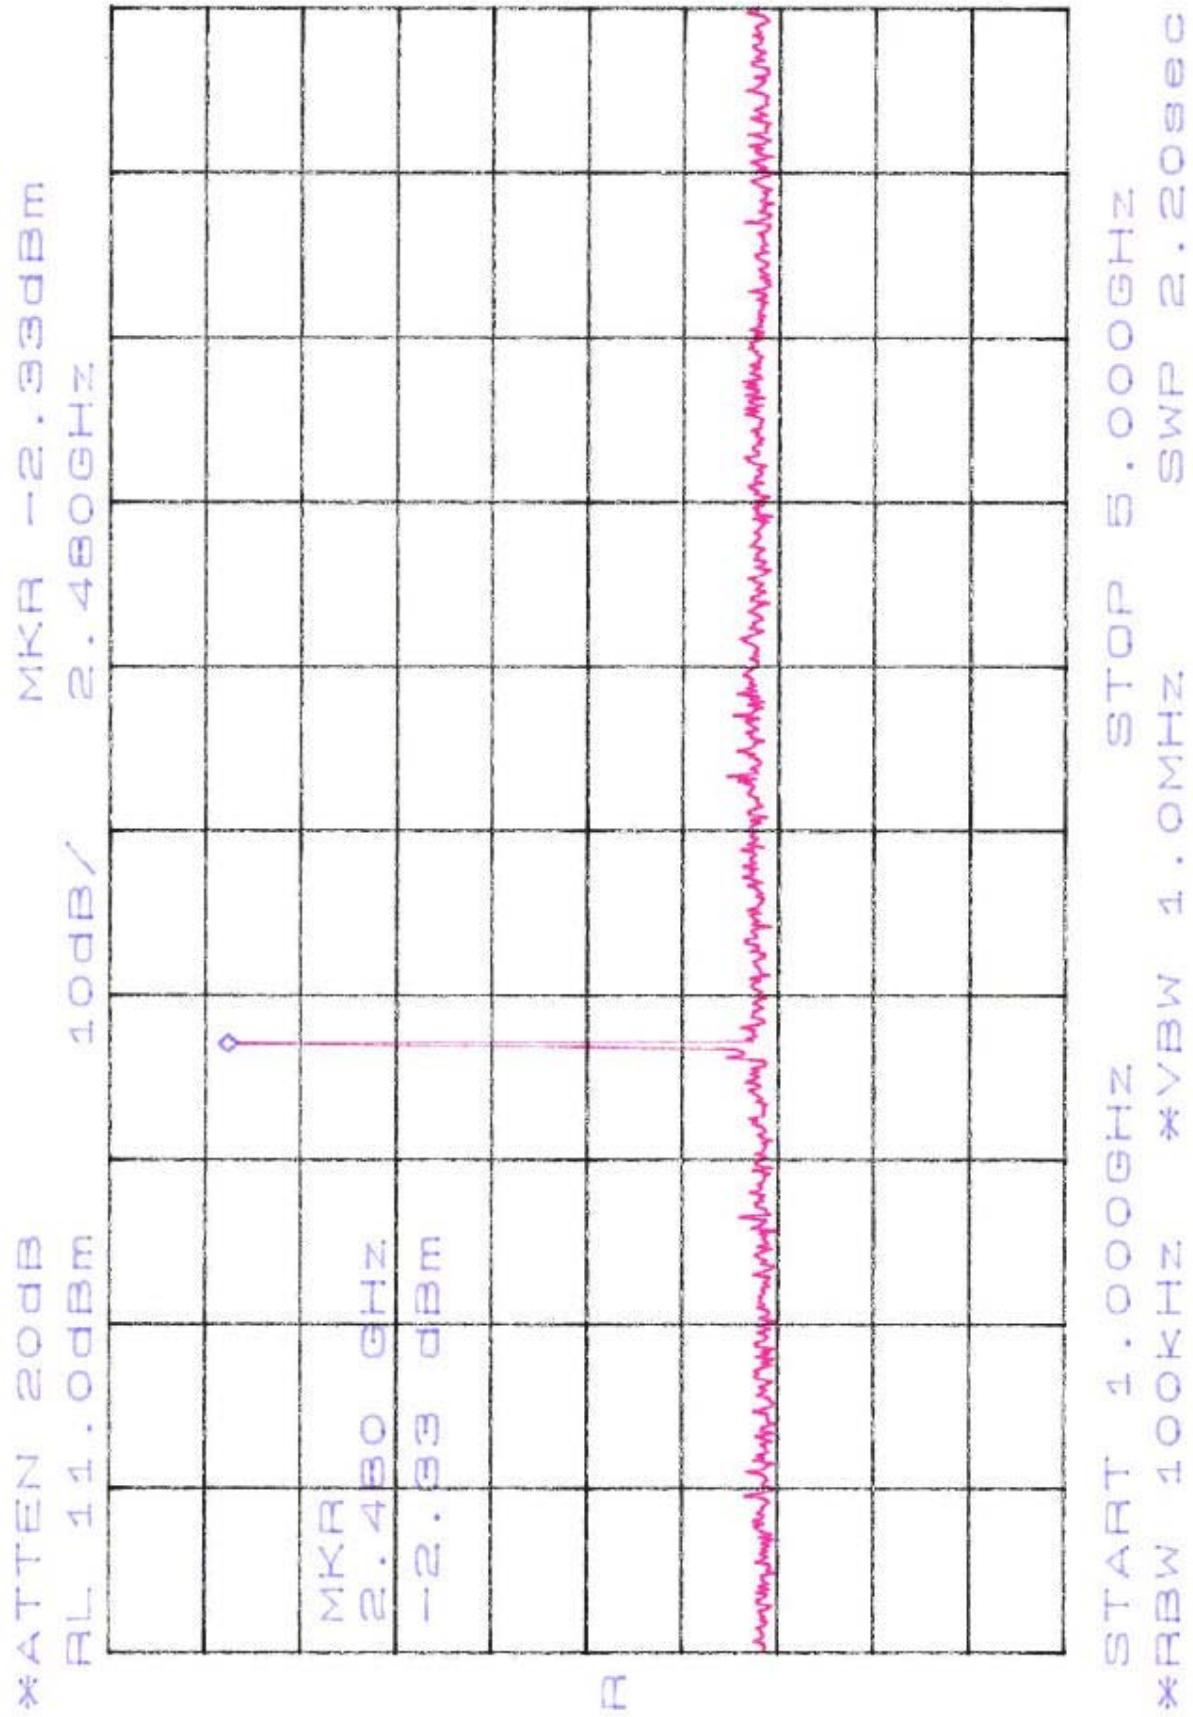

* ATTEN 20DB
RL 42.0DBM
MKR -47.50DBM
24.03GHZ

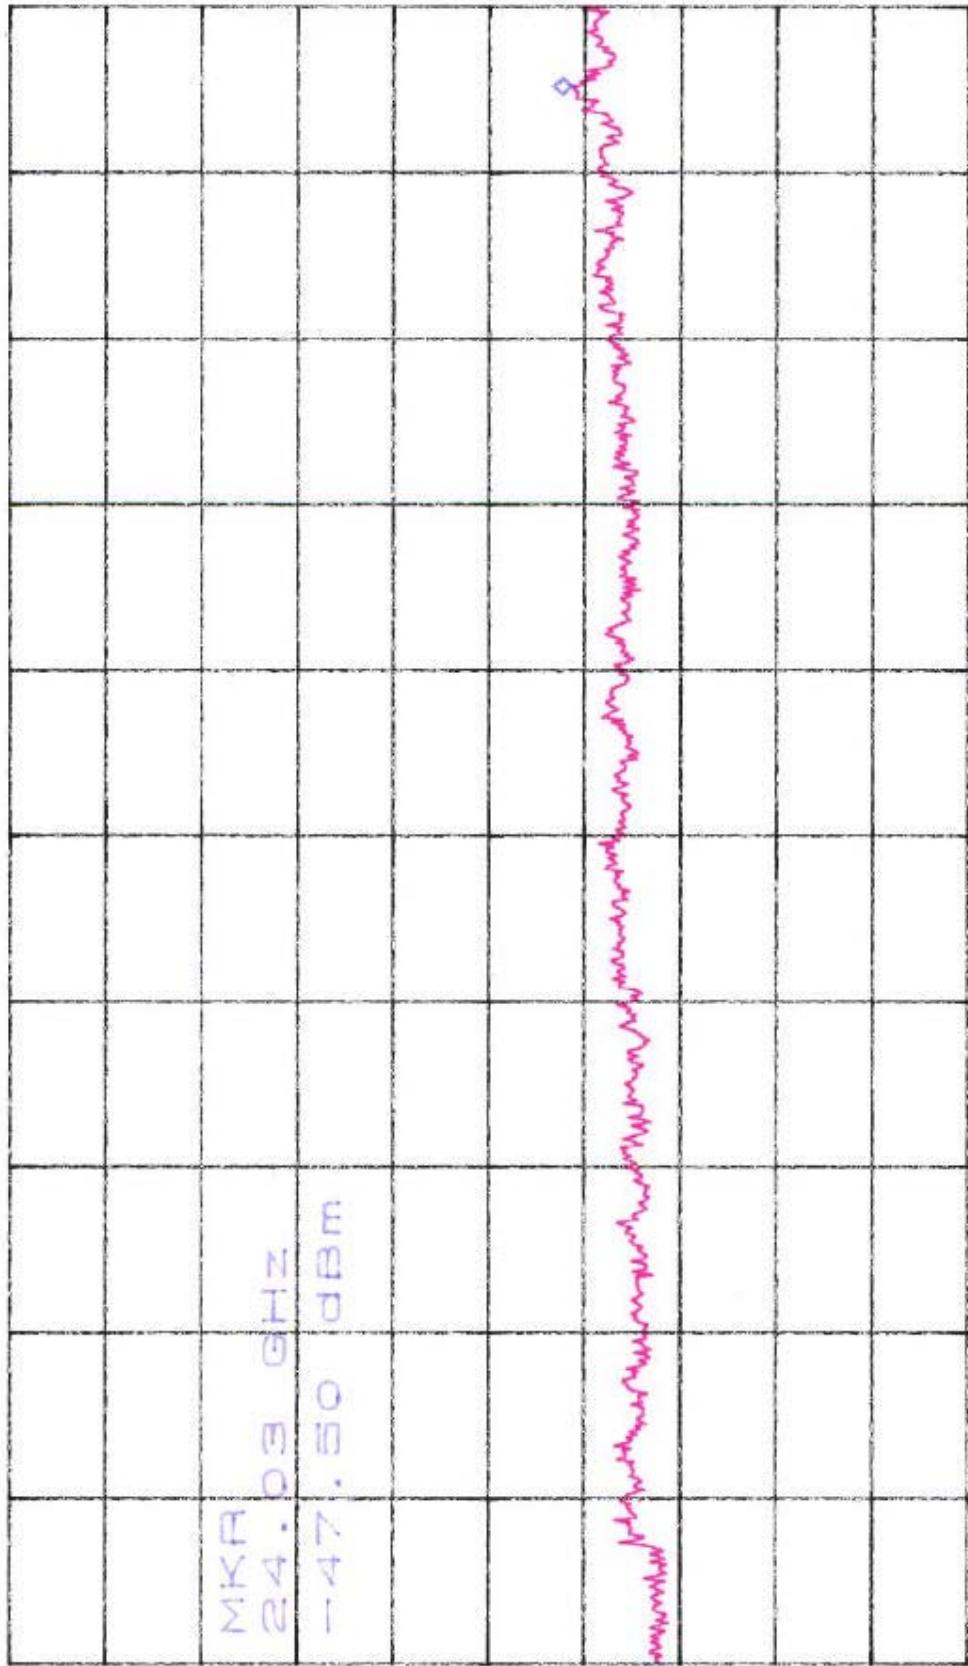

* RBW 100HZ *VBW 4.0MHz STOP 25.00GHz
START 5.00GHz SWP 44.0sec

Appendix 8 : Plotted Data for Peak Power Spectral Density

