

hp

REF -30.0 dBm

AT 10 dB

MKR 87.250 msec

-36.70 dBm

50% duty cycle

PEAK

LOG


10

dB/

VA SB

SC VC

CORR

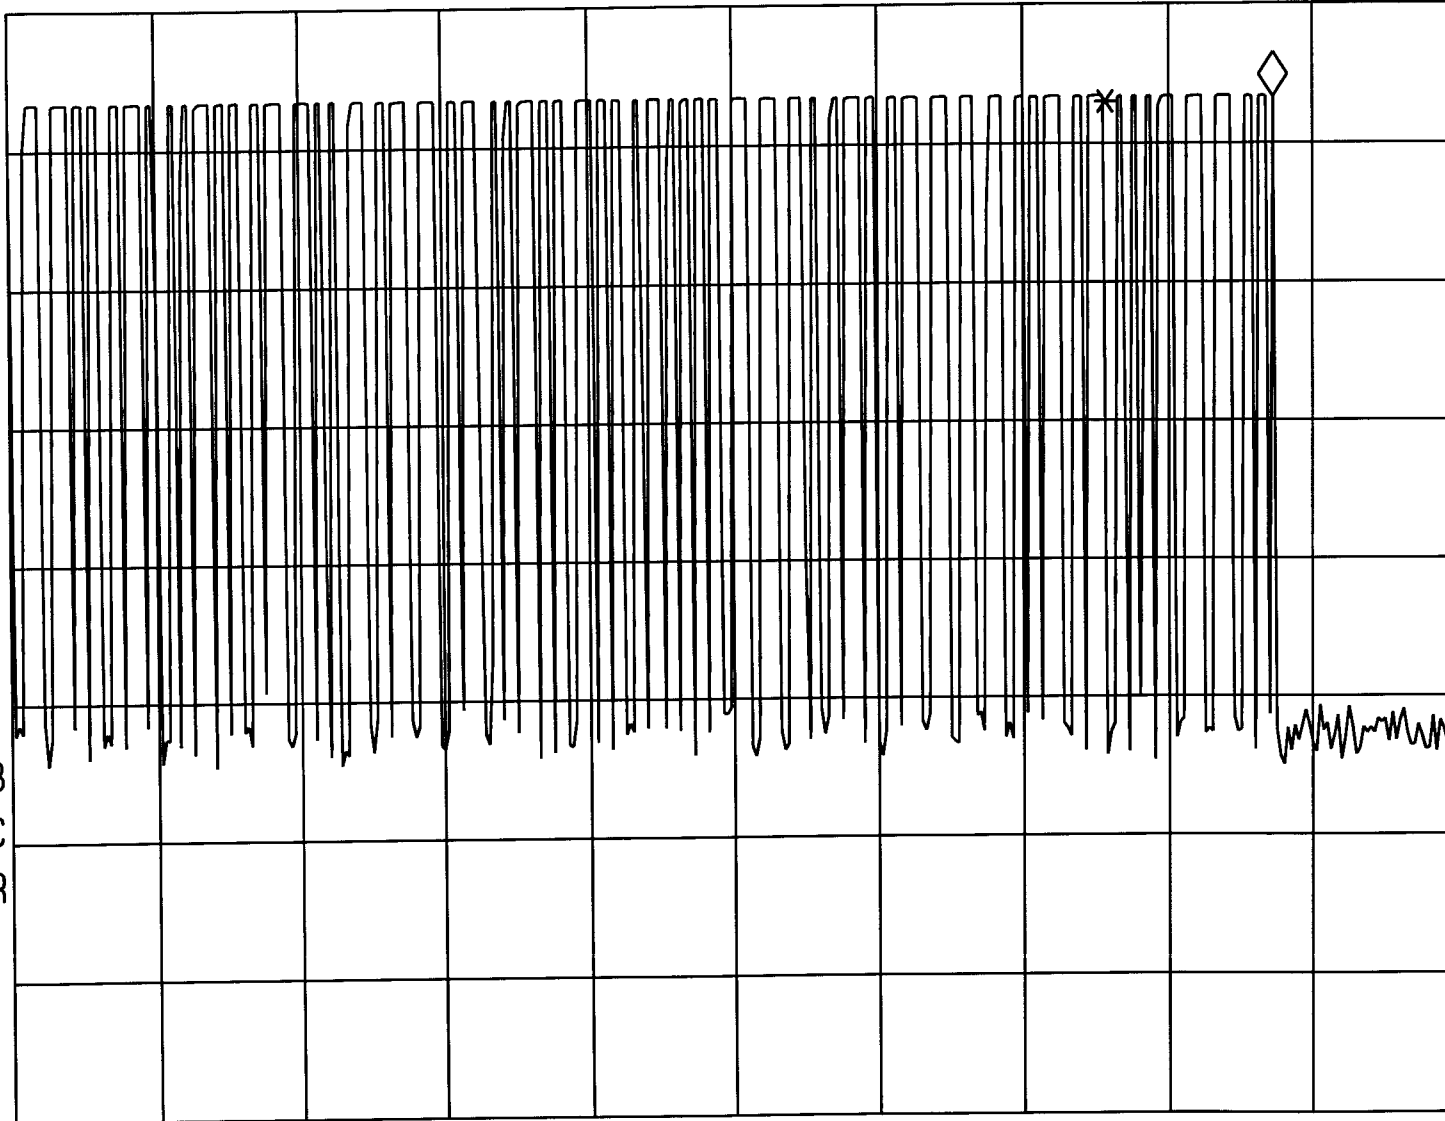

CENTER 433.885 MHz

#RES BW 100 kHz

#VBW 100 kHz

SPAN 0 Hz

#SWP 100 msec

$$\begin{aligned} \text{Average factor} &= \frac{87.25 \times 0.5}{100} \\ &= \frac{43.63}{100} \\ &= 0.436 \text{ or } -7.2 \text{ dB} \end{aligned}$$

hp

REF -30.0 dBm

AT 10 dB

MKR 900.00 μ sec

.16 dB

Data Pattern: 50% Duty cycle

PEAK

LOG

10

dB/

0.45 ms

VA SB

SC VS

CORR


CENTER 433.885 MHz

#RES BW 100 kHz

#VBW 100 kHz

SPAN 0 Hz

#SWP 15.0 msec

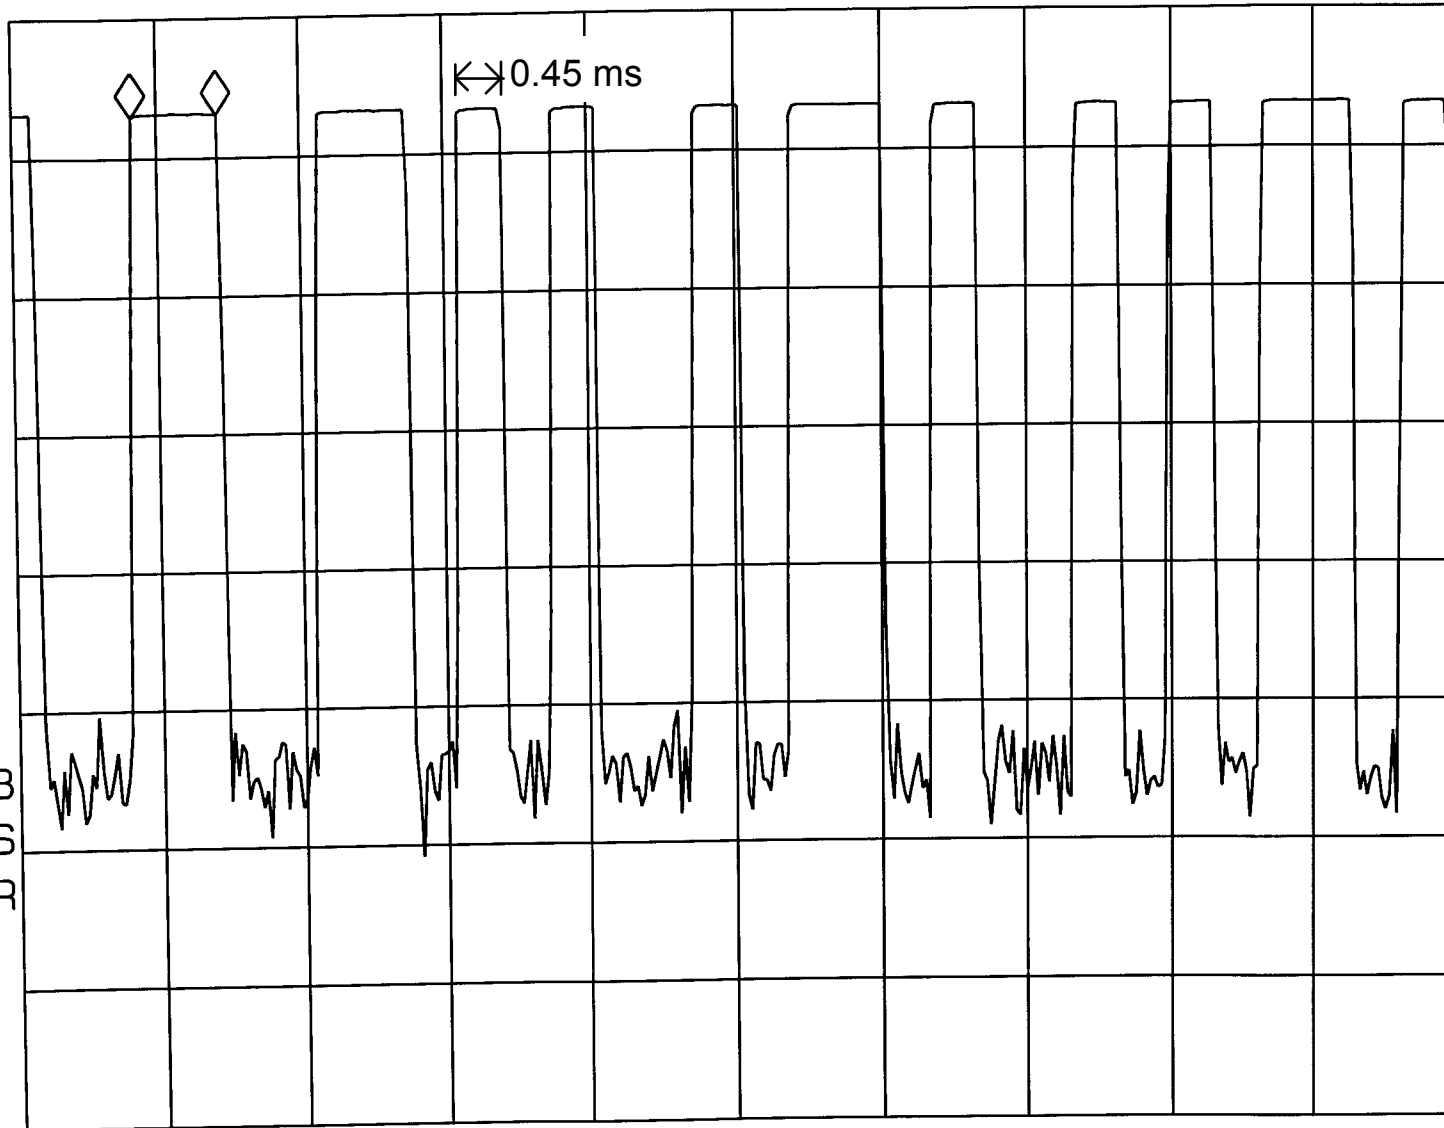

hp

REF -30.0 dBm

AT 10 dB

MKR 372.50 msec

-35.41 dBm

PEAK

LOG


10

dB/

WA SB

SC VC

CORR

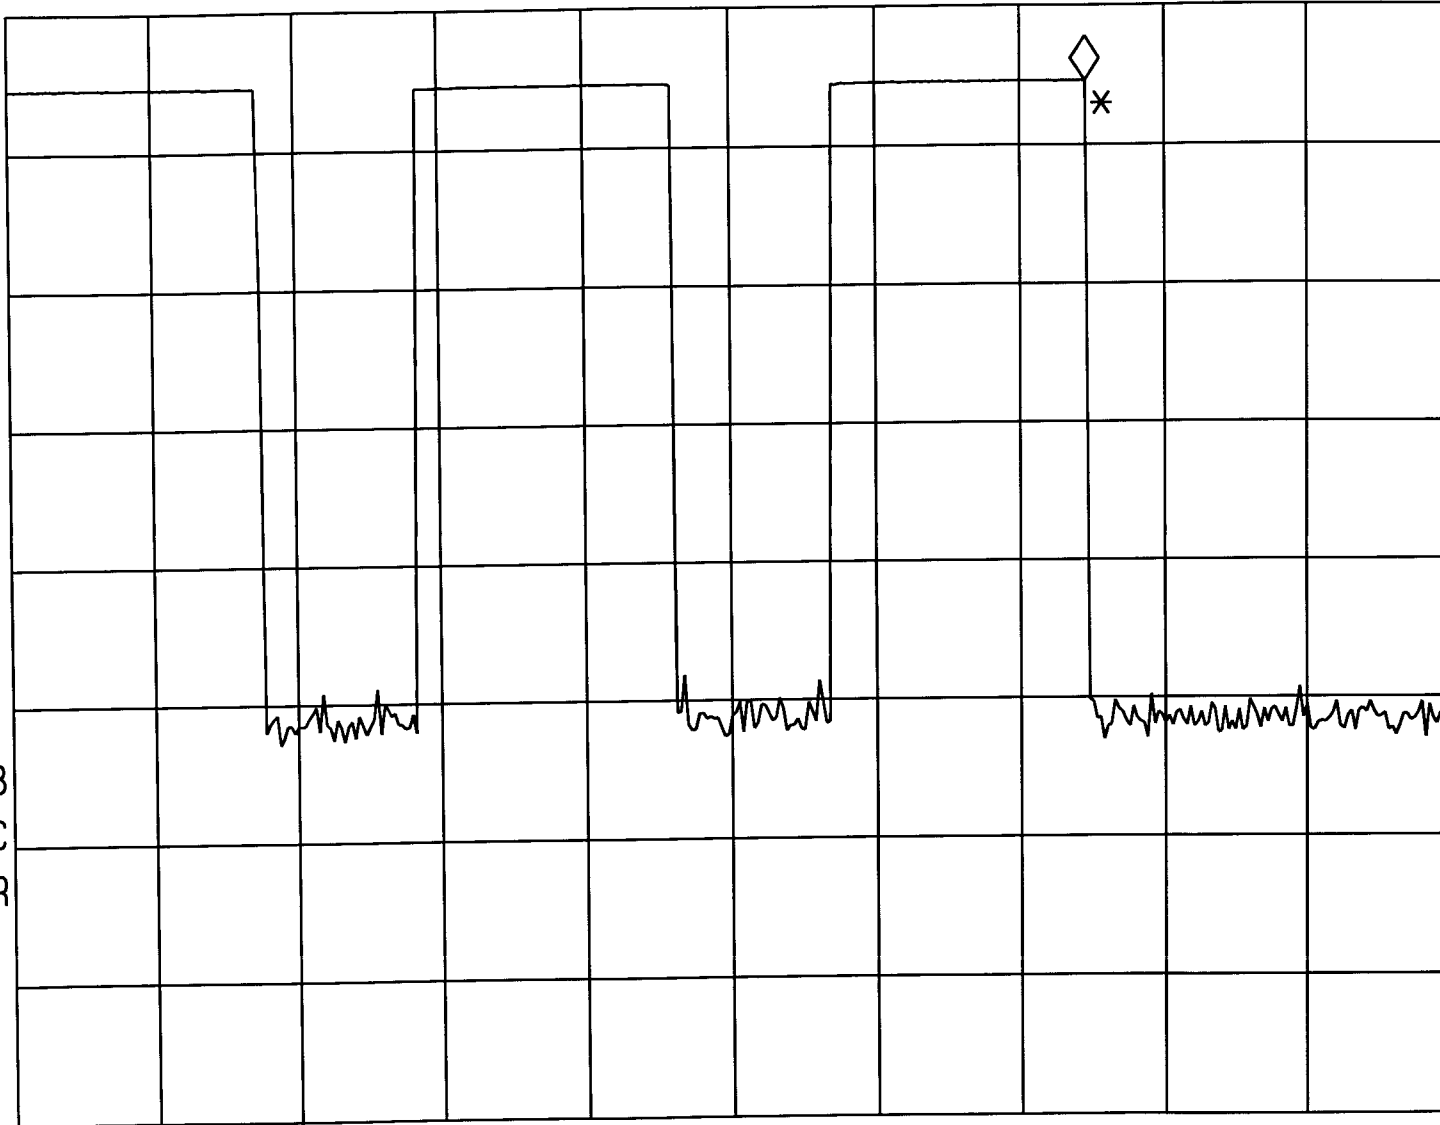

CENTER 433.885 MHz

SPAN 0 Hz

#RES BW 100 kHz

#VBW 100 kHz

#SWP 500 msec

hp

MKR 42.750 sec

REF -30.0 dBm

AT 10 dB

.37 dB

PEAK

LOG

10

dB/

VA SB

SC VC

CORR

CENTER 433.885 MHz

SPAN 0 Hz

#RES BW 100 kHz

#VBW 100 kHz

#SWP 50.0 sec

