

FCC Test Report

Report No.: AGC09626231201FR02

FCC ID	:	Q9SAWR4002DU
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Two-way radio
BRAND NAME	:	AWC
MODEL NAME	:	AWR4000DU, AWR4002DU
APPLICANT	:	Northfield Telecommunications, Inc. d/b/a Advanced Wireless Communications
DATE OF ISSUE	:	Jan. 09, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Jan. 09, 2024	Valid	Initial Release	




Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	
2.2 Test Frequency List	
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Special Accessories	7
2.6 Equipment Modifications	7
2.7 Antenna Requirement	7
3. Test Environment	
3.1 Address of the Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	9
3.4 Measurement Uncertainty	9
3.5 List of Equipment Use	
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used In Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	14
6. Duty Cycle Measurement	
7. RF Output Power Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	
8. 6dB Bandwidth Measurement	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8.4 Measurement Results	
9. Power Spectral Density Measurement	
9.1 Provisions Applicable	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Results	
10. Conducted Band Edge and Out-of-Band Emissions	
10.1 Provisions Applicable	20



Report No.: AGC09626231201FR02 Page 4 of 52

10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	
10.4 Measurement Results	
11. Radiated Spurious Emission	
11.1 Measurement Limit	
11.2 Measurement Procedure	
11.3 Measurement Setup (Block Diagram of Configuration)	
11.4 Measurement Result	
12. AC Power Line Conducted Emission Test	
12.1 Measurement Limit	
12.2 Measurement Setup (Block Diagram of Configuration)	
12.3 Preliminary Procedure of Line Conducted Emission Test	
12.4 Final Procedure of Line Conducted Emission Test	
12.5 Measurement Results	
Appendix I: Photographs of Test Setup	
Appendix II: Photographs of Test EUT	





1. General Information

Applicant	Northfield Telecommunications, Inc. d/b/a Advanced Wireless Communications
Address	20809 Kensington Blvd. Lakeville MN 55044 United States Of America
Manufacturer	Northfield Telecommunications, Inc. d/b/a Advanced Wireless Communications
Address	20809 Kensington Blvd. Lakeville MN 55044 United States Of America
Factory	Shenzhen Surwave Technologies Co., LTD
Address	Huolibao Building West, No31, Gaoxinbei Rd.6, Hi-Tech Industral Park, Nanshan District, Shenzhen, China
Product Designation	Two-way radio
Brand Name	AWC
Test Model	AWR4000DU
Series Model	AWR4002DU
Declaration of Difference	Different colors and model names
Date of receipt of test item	Dec. 14, 2023
Date of Test	Dec. 14, 2023~Jan. 09, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-BLE-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

Bibo zhang

Bibo Zhang (Project Engineer)

Jan. 09, 2024

Reviewed By

Calvin Liu (Reviewer)

Jan. 09, 2024

Approved By

Max Zhan

Max Zhang Authorized Officer

Jan. 09, 2024



2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.2
Modulation Type	BLE GFSK 1Mbps GFSK 2Mbps
Number of channels	40
Carrier Frequency of Each Channel	40 Channels (37 hopping + 3 advertising channels)
Channel Separation	2 MHz
Maximum Transmitter Power	Bluetooth LE (1Mbps): -3.936dBm (0.0004W)
Hardware Version	V03
Software Version	V1.2.8.1103
Antenna Designation	PCB Antenna
Antenna Gain	0.17dBi
Power Supply	DC 3.7V by battery
Adapter Information	Input: AC 100-240V 50/60Hz, 0.2A OUTPUT: DC 5.9V 0.8A
Charger Information	Input: DC 5.9V 0.8A OUTPUT: DC 4.2V

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency		
	0	2402 MHz		
	1	2404 MHz		
	:	: 2440MHz		
2400~2483.5MHz	19			
	:	:		
	38	2478 MHz		
	39	2480 MHz		
Note: f = 2402 + 2*k MHz, k = 0,, 39 f is the operating frequency (MHz); k is the operating channel.				



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **Q9SAWR4002DU**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 0.17dBi.



3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3.7V

3.4 Measurement Uncertainty

The reported uncertainty of measurement y \pm U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U _c = ±2 %
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %



3.5 List of Equipment Use

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31	
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2023-03-03	2024-03-02	
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2023-03-03	2024-03-02	
\boxtimes	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2023-06-01	2024-05-31	
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17	
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22	
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-11-13	2024-11-12	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31	
\square	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	

• A	AC Power Line Conducted Emission									
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)			
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02			
\boxtimes	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024-06-02			
\square	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2024-06-08			



• Te:	Test Software								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information				
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71				
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A				
	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6				
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0				



4.System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

- Test Accessories Come From The Laboratory
- ☑ Test Accessories Come From The Manufacturer

N 0.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Adapter	KT05W059080 USD	N/A	Input: 100-240V 50/60Hz, 0.2A Output: DC 5.9V 0.8A	1.0m unshielded
2	Charger	AWSC-4000	N/A	Input: DC 5.9V 800mA Output: DC 4.2V	N/A
3	Battery	AWB-4002	N/A	DC 3.7V 1820mAh	N/A
4	Back Clip	N/A	N/A	N/A	N/A



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(3)	RF Output Power	Pass
3	§15.247 (a)(2)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
5	§15.209	Radiated Emission& Band Edge	Pass
6	§15.207	AC Power Line Conducted Emission	Pass



5. Description of Test Modes

	Summary Table of Test Cases					
Test Item	Data Rate / Modulation					
Test tielli	Bluetooth – LE(1Mbps) / GFSK					
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps(Battery powered or AC/DC adapter)					
Radiated & Conducted Test Cases	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps(Battery powered or AC/DC adapter)					
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps(Battery powered or AC/DC adapter)					
AC Conducted Emission	Mode 1: Bluetooth Link + Battery + AC Adapter					

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

```
Software Setting Diagram
```

串口设置			
	return code: 0x0		
串口: COM3(USB-SERIAL CH340) 🗸	配置数据发送成功!		
波特率: 115200	reply data: 04 0E 04 01 01 FC 00 return code: 0x0		
数据位: 8 ▼	neturn code: 0x0 配帶数据发送成功!		
校验位: None 🔻	reply data: 04 0E 04 01 01 FC 00		
	return code: 0x0		
停止位: 1 👻	配置数据发送成功!		
流控: NoFlow ▼	reply data: 04 0E 04 01 01 FC 00		
关闭	return code: 0x0		
	配置数据发送成功! reply data: 04 0E 04 01 01 FC 00		
BR/EDR BLE	repry data: 04 0E 04 0T 0T FC 00		
Command_Type TX_TEST_CMD -	配置数据发送成功!		
ch_index (0 - 2402) -	reply data: 04 0E 04 01 01 FC 00		
	return code: 0x0		
len_of_test_data 0xff 🔹	配置数据发送成功!		
Package_Payload PRBS9 💌	设备[COM3]关闭		
PHY LE 1M PHY -	打开设备[COM3]成功		
Modulation Index standard -	周三 11月 1 09:59:32 2023 TEST BLE		
Transmit_Power 0 v	Command Type: TX TEST CMD		
Tratistic_rower 0	ch index: (0 - 2402)		
Send configuration	len_of_test_data: 0xff		1
COMP CONTRACTOR	Package_Payload: PRBS9		
	reply data: 04 0E 04 01 1E 20 00		
	return code: 0x0		
	发送成功!		



6. Duty Cycle Measurement


The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	T(µs)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
BLE_1Mbps	2116	85	0.71	0.47

Remark:

- 1. Duty Cycle factor = $10 * \log (1/\text{Duty cycle})$
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value

The test plots as follows:

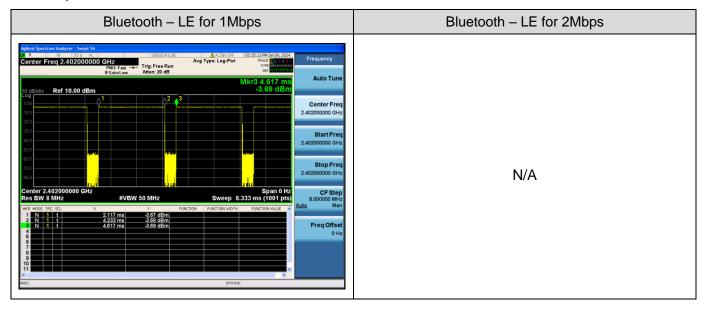



7. RF Output Power Measurement

7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.


7.2 Measurement Procedure

For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.1 Method Max peak power:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the RBW≥DTS bandwidth
- 3. Set the VBW \geq [3 × RBW].
- 4. Span≥[3 x RBW].
- 5. Sweep= auto couple.
- 6. Detector Function= Peak.
- 7. Trace mode= Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- For Average power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G:
- 1. The RF output of EUT was connected to the power meter by RF cable and attenuator.
- 2. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power and record the results in the test report.


7.3 Measurement Setup (Block Diagram of Configuration)

⊠For Average power test setup

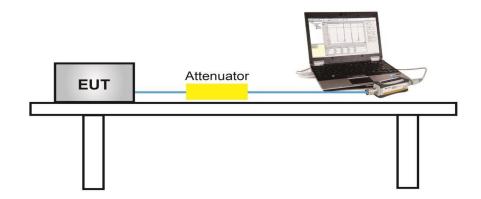



For peak power test setup

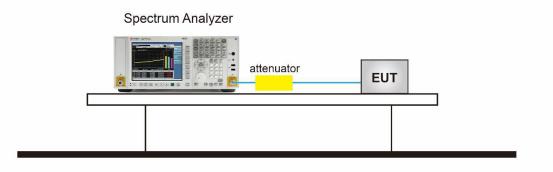


7.4 Measurement Result

Test Data of Conducted Output Power								
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail				
GFSK_1Mbps	2402	-4.567	≪30	Pass				
	2440	-3.936	≪30	Pass				
	2480	-5.270	≪30	Pass				


Test Data of Conducted Output Power							
Test ModeTest Frequency (MHz)Average Power (dBm)Limits (dBm)Pass or Fail							
GFSK_1Mbps	2402	-6.567	≪30	Pass			
	2440	-5.936	≪30	Pass			
	2480	-7.270	≪30	Pass			



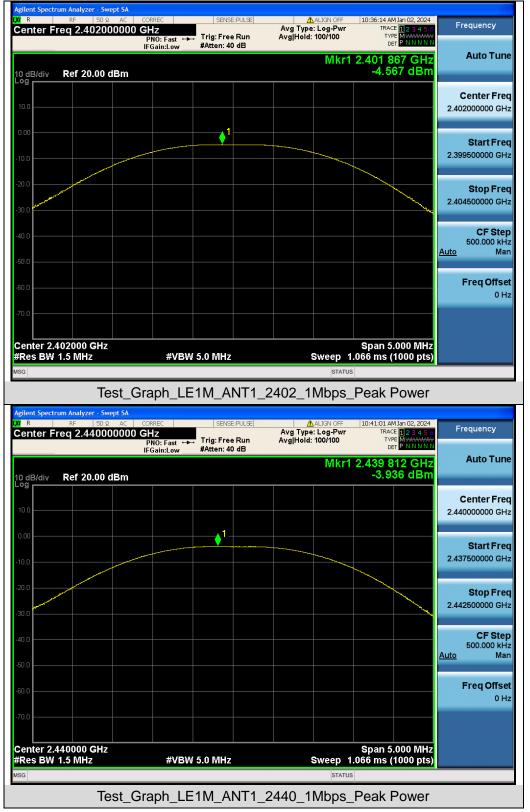

Test Graphs of Conducted Output Power



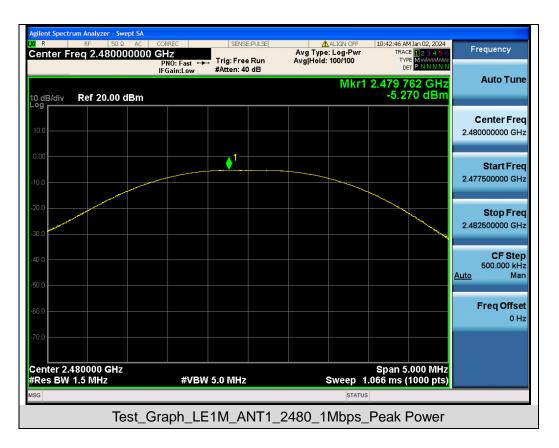



8. 6dB Bandwidth Measurement

8.1 Provisions Applicable


The minimum 6 dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

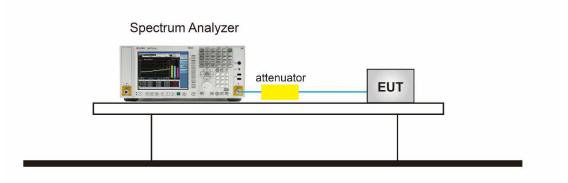




8.4 Measurement Results

Test Data of Occupied Bandwidth and DTS Bandwidth							
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits	Pass or Fail		
GFSK_1Mbps	2402	1.034	0.675	≥0.5	Pass		
	2440	1.032	0.670	≥0.5	Pass		
	2480	1.031	0.671	≥0.5	Pass		


Test Graphs of Occupied Bandwidth

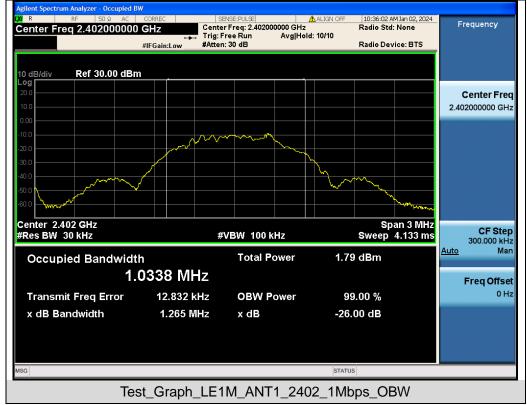








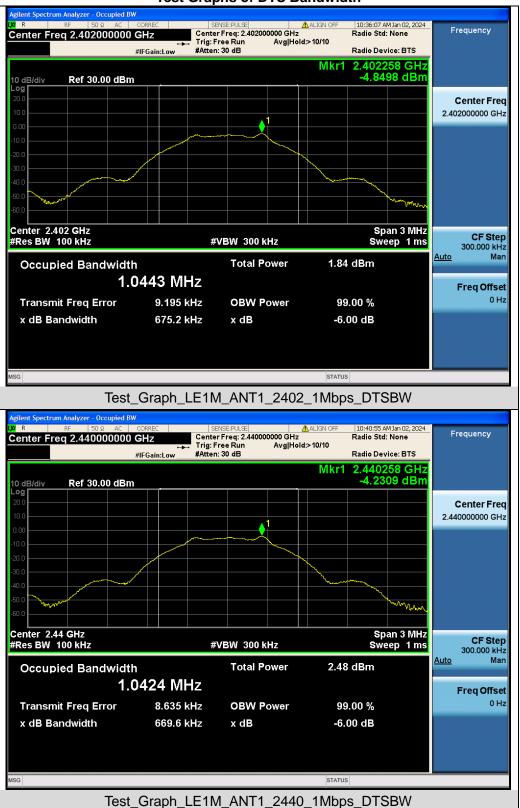

Test Graphs of DTS Bandwidth



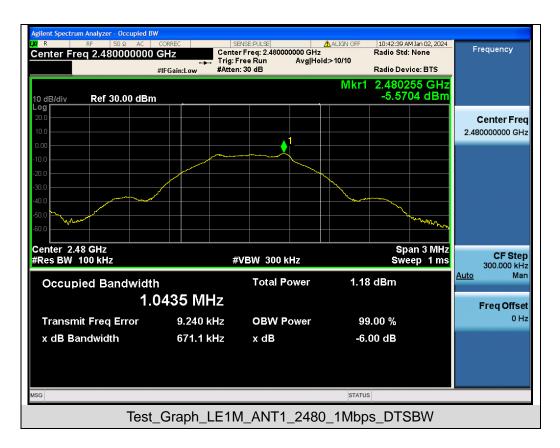



9. Power Spectral Density Measurement

9.1 Provisions Applicable


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 5. Measure and record the results in the test report.
- The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

9.3 Measurement Setup (Block Diagram of Configuration)

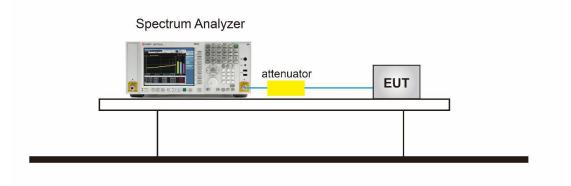





9.4 Measurement Results

Test Data of Conducted Output Power Spectral Density						
Test ModeTest Frequency (MHz)Power density (dBm/3kHz)Limit (dBm/3kHz)Pass						
	2402	-20.429	≪8	Pass		
GFSK_1Mbps	2440	-19.567	≪8	Pass		
	2480	-21.235	≪8	Pass		

Test Graphs of Conducted Output Power Spectral Density

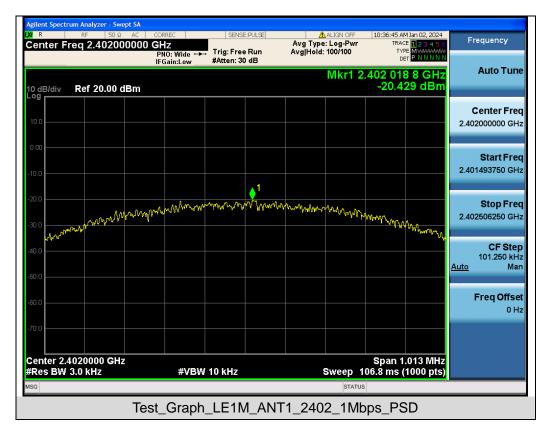



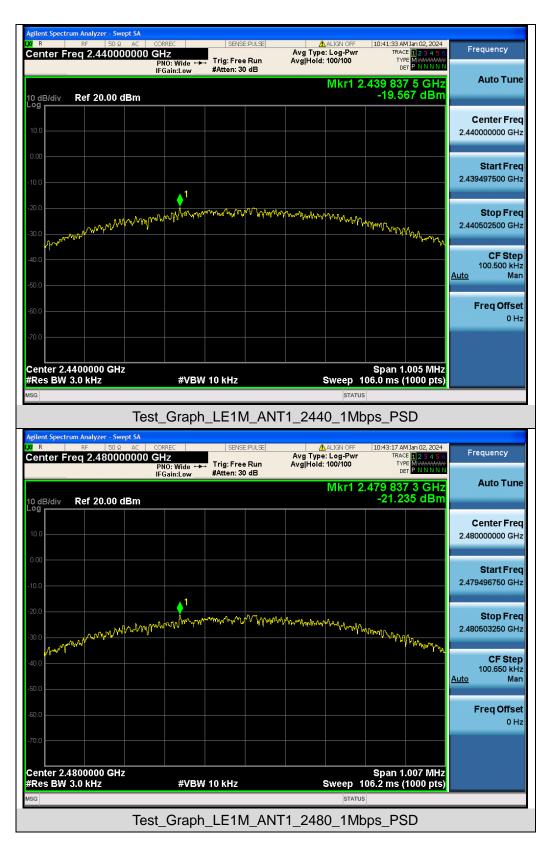



10. Conducted Band Edge and Out-of-Band Emissions


10.1 Provisions Applicable

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

10.2 Measurement Procedure

- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to \geq 1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- 4. Set the VBW \geq 3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize

10.3 Measurement Setup (Block Diagram of Configuration)

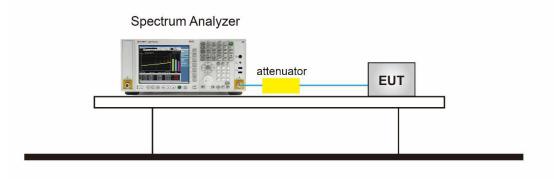




10.4 Measurement Results




Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



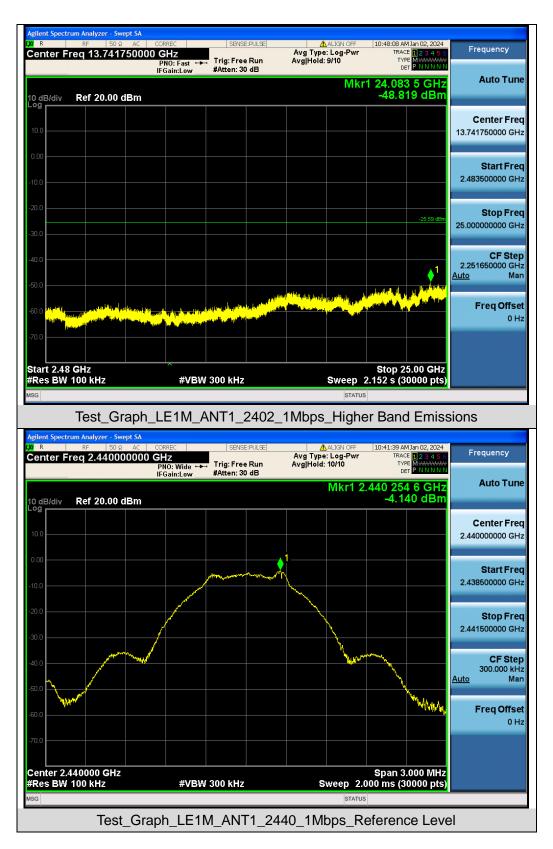




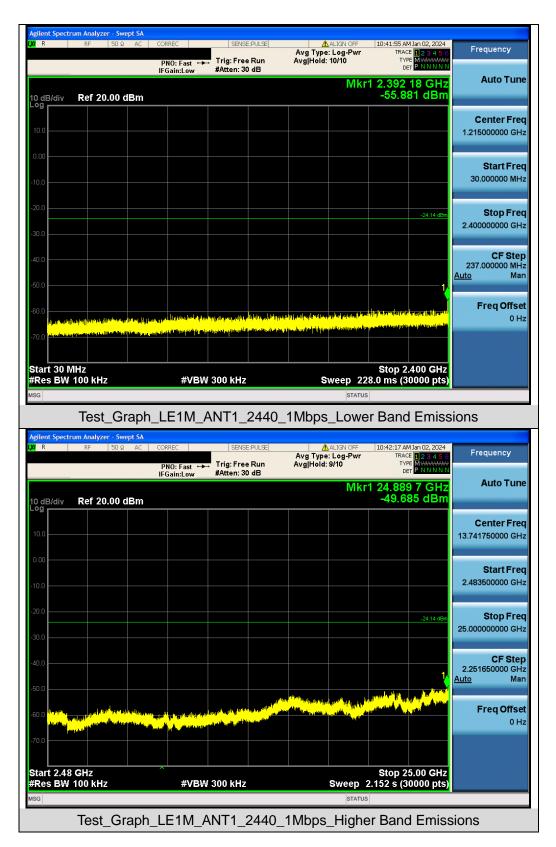








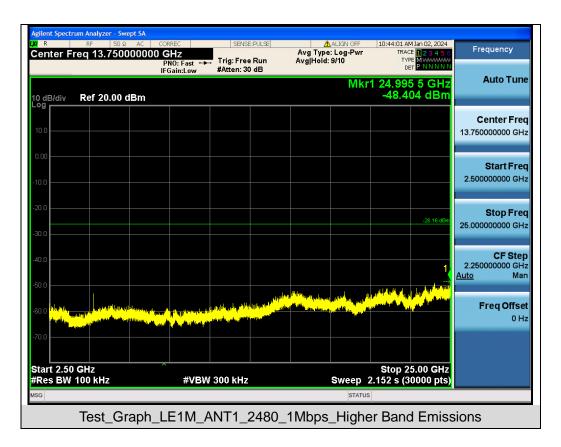



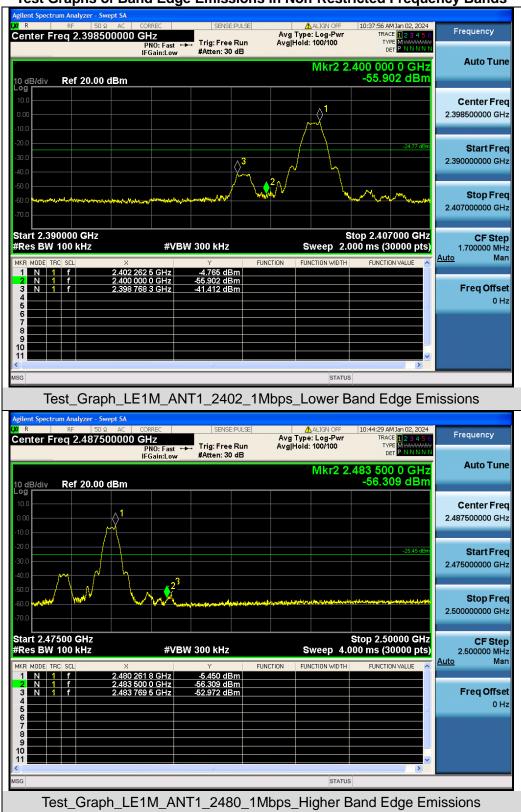

Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



11. Radiated Spurious Emission

11.1 Measurement Limit

FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. Any report aving or been stated by averaging over other and the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train does not exceed by the transmitter operates for longer than 0.1 seconds.

Stamp" is deemed to be invalid. Copying or excepting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum ParameterSettingStart ~Stop Frequency9kHz~150kHz/RB 200Hz for QPStart ~Stop Frequency150kHz~30MHz/RB 9kHz for QPStart ~Stop Frequency30MHz~1000MHz/RB 120kHz for QPStart ~Stop Frequency1GHz~26.5GHzStart ~Stop Frequency1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

• Average Measurements above 1GHz (Method VB)


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW setting requirements are as follows:
- 4. If the EUT is configured to transmit with duty cycle \ge 98%, set VBW = 10 Hz.
- 5. If the EUT duty cycle is < 98%, set VBW \ge 1/T. T is the minimum transmission duration.
- 6. Detector = Peak
- 7. Sweep time = auto
- 8. Trace mode = max hold
- 8. Trace was allowed to stabilize




11.3 Measurement Setup (Block Diagram of Configuration)

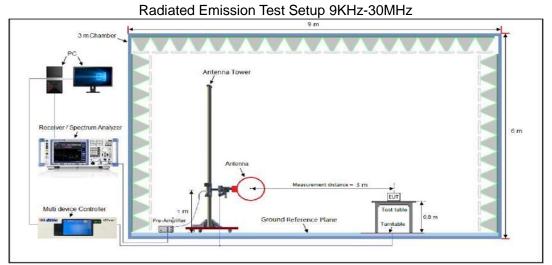

Radiated Emission Test Setup 30MHz-1000MHz

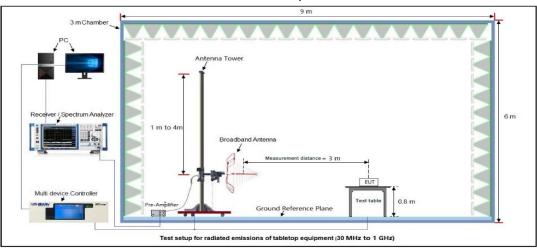

Radiated Emission Test Setup Above 1000MHz

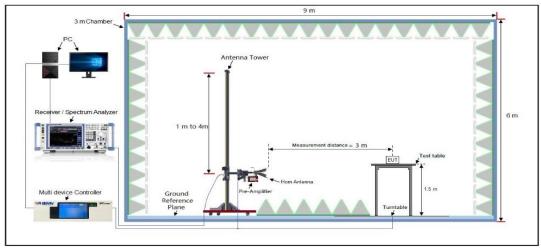

11.4 Measurement Result

Any report having not been signed by authorized approver, **Radiated Emission**, **Below**, **30MHz** ot been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com



The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

			R	adia	ted Emissi	on Test Res	ults at 30MHz	-1GHz			
EUT N	lame	Two	-way radio)			Model Na	ime	AWR4002	DU.	
Tempe	emperature 22.7°C		°°C				Relative I	Humidity	59.8%		
Press	ure	960	hPa				Test Volta	age	DC 3.7V k	by battery	
Test N	lode	Mod	le 2				Antenna	Polarity	Horizontal		
Leve[dBµV/m]	130 120 110 90 80 70 60 50 40 30 20 10 0 -10 30M				100M	FCC Pa	rt 15C		×4	16	
		P Limit Detector	— Horizontal	PK		Frequer	cy[Hz]				
Final I	Data List										
NO.	Frec [MHz		Level [dBµV/ı		Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	60.0	7	23.02		17.86	40.00	16.98	100	160	Horizontal	
2	99.8	4	27.26	;	17.03	43.50	16.24	100	170	Horizontal	
3	238.5	55	21.66	;	15.81	46.00	24.34	100	90	Horizontal	
4	461.6	65	28.49)	24.36	46.00	17.51	100	220	Horizontal	
5	620.7	73	31.03	5	25.82	46.00	14.97	100	160	Horizontal	
6	876.8	31	35.40)	29.44	46.00	10.60	100	140	Horizontal	

Report No.: AGC09626231201FR02 Page 40 of 52



Radiated Emission Test Results at 30MHz-1GHz												
EUT N	lame	Two	Two-way radio					el Nan	ne	AWR4002	DU	
Tempe	erature	22.7	$^{\circ}\!$				Relat	Relative Humidity 59.8%				
Press	ure	960ł	nPa				Test	Voltag	je	DC 3.7V by battery		
Test N	lode	Mod	e 2				Antei	nna P	olarity	Vertical		
Level[dBµV/m]		2 Limit Detector	Vertical PK	* 1	100M	FCC Pa					16	
Final I	Data List											
NO.	Freq [MHz		Level [dBµV/m]		Factor [dB]	Limit [dBµV/m]	Margi [dB]	n	Height [cm]	Angle [°]	Polarity	
1	73.6	5	24.56		13.66	40.00	15.44	L	100	160	Vertical	
2	102.7	'5	28.85		16.93	43.50	14.65	5	100	170	Vertical	
3	159.0)1	24.16		17.75	43.50	19.34	ŀ	100	90	Vertical	
4	459.7	'1	29.54		24.69	46.00	16.46	5	100	220	Vertical	
5	620.7	'3	30.74		25.82	46.00	15.26	6	100	160	Vertical	
6	864.	2	35.36		29.87	46.00	10.64	ŀ	100	140	Vertical	

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin= Limit-Measurement.

2. All test modes had been pre-tested. The mode 2 is the worst case and recorded in the report.



EUT N	Name	Two-way radio)		Model Name		AWR4	AWR4002DU		
Temperature		25 ℃	25 ℃				Relative Humidity		55.4%	
Pressure		960hPa	Test Voltage			DC 3.7V by battery				
Test N	Node	Mode 1			Antenna Polarity		Horizontal			
		·								
	Frequency	Meter Reading	Factor	Emission	Level	Limits	Μ	argin		
	(MHz)	(dBµV)	(dB)	(dBµV/	/m)	(dBµV/m)	((dB)	Value Type	
	4804.011	51.74	0.08	51.8	2	74.00	-2	2.18	peak	
	4804.011	40.52	0.08	40.6	0	54.00	-1	3.40	AVG	
	7206.022	48.33	2.21	50.5	4	74.00	-2	23.46	peak	
	7206.022	39.74	2.21	41.9	5	54.00	-1	2.05	AVG	
	Remark:									
	Factor = Anten	ina Factor + Cable	Loss – Pre-	amplifier.						
		_								
EUT N	Name	Two-way radio)		Mode	el Name		AWR4	002DU	
Temp	erature	25 ℃			Relative Humidity 55			55.4%		
Press	ure	960hPa	960hPa			Test Voltage		DC 3.7	V by battery	
Test N	Node	Mode 1			Ante	Antenna Polarity Vertical			al	
	Frequency	Meter Reading	Factor	Emission	Level	Limits	Μ	argin	Value Type	
	(MHz)	(dBµV)	(dB)	(dBµV/		(dBµV/m)		(dB)		
	(MHz) 4804.011	49.63	0.08	49.7	1	74.00	-2	24.29	peak	
	(MHz) 4804.011 4804.011	49.63 41.15	0.08		1	, , ,	-2 -1	24.29 2.77	peak AVG	
	(MHz) 4804.011 4804.011 7206.022	49.63 41.15 48.74	0.08 0.08 2.21	49.7 41.2 50.9	1 3 5	74.00 54.00 74.00	-2 -1 -2	24.29 2.77 23.05	peak AVG peak	
	(MHz) 4804.011 4804.011	49.63 41.15	0.08	49.7 41.2	1 3 5	74.00 54.00	-2 -1 -2	24.29 2.77	peak AVG	
	(MHz) 4804.011 4804.011 7206.022	49.63 41.15 48.74	0.08 0.08 2.21	49.7 41.2 50.9	1 3 5	74.00 54.00 74.00	-2 -1 -2	24.29 2.77 23.05	peak AVG peak	
	(MHz) 4804.011 4804.011 7206.022 7206.022	49.63 41.15 48.74	0.08 0.08 2.21	49.7 41.2 50.9	1 3 5	74.00 54.00 74.00	-2 -1 -2	24.29 2.77 23.05	peak AVG peak	
	(MHz) 4804.011 4804.011 7206.022 7206.022 Remark:	49.63 41.15 48.74 38.85	0.08 0.08 2.21 2.21	49.7 41.2 50.9 41.0	1 3 5	74.00 54.00 74.00	-2 -1 -2	24.29 2.77 23.05	peak AVG peak	
	(MHz) 4804.011 4804.011 7206.022 7206.022 Remark:	49.63 41.15 48.74	0.08 0.08 2.21 2.21	49.7 41.2 50.9 41.0	1 3 5	74.00 54.00 74.00	-2 -1 -2	24.29 2.77 23.05	peak AVG peak	

RESULT: Pass



EUT Name	Two-way rad	io	Mode	Model Name		AWR4002DU	
Femperature	25 ℃	25 ℃			55.4%	55.4%	
Pressure	960hPa		Test	Test Voltage		DC 3.7V by battery	
Fest Mode	Mode 2	Mode 2			Horizo	ontal	
Frequency	Frequency Meter Reading Factor Emission Level Limits		Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4880.005	49.63	0.14	49.77	74.00	-24.23	peak	
4880.005	40.25	0.14	40.39	54.00	-13.61	AVG	
7320.140	46.37	2.36	48.73	74.00	-25.27	peak	
7320.140	38.75	2.36	41.11	54.00	-12.89	AVG	
Remark:							
	na Factor + Cable	e Loss – Pre-	amplifier				
	nna Factor + Cable	e Loss – Pre-	amplifier.				
	nna Factor + Cable			el Name	AWR4	002DU	
Factor = Anter			Mode	el Name tive Humidity	AWR4		
Factor = Anter	Two-way rad		Mode Rela		55.4%		
Factor = Anter	Two-way rad		Mode Relat Test	tive Humidity	55.4%	7V by battery	
Factor = Anter	Two-way rad 25℃ 960hPa Mode 2	io	Mode Rela Test Ante	tive Humidity Voltage nna Polarity	55.4% DC 3.7 Vertica	7V by battery	
Factor = Anter	Two-way rad 25℃ 960hPa Mode 2 Meter Reading	io Factor	Model Relative Test Ante	tive Humidity Voltage nna Polarity	55.4% DC 3.7 Vertica	7V by battery al	
Factor = Anter	Two-way rad 25℃ 960hPa Mode 2 Meter Reading (dBµV)	Factor (dB)	Mode Relat Test Ante Emission Level (dBµV/m)	tive Humidity Voltage nna Polarity Limits (dBµV/m)	55.4% DC 3.7 Vertica Margin (dB)	7V by battery al Value Type	
Factor = Anter	Two-way rad 25 °C 960hPa Mode 2 Meter Reading (dBµV) 50.26	Factor (dB) 0.14	Model Relat Test Ante Emission Level (dBµV/m) 50.40	tive Humidity Voltage nna Polarity Limits (dBµV/m) 74.00	55.4% DC 3.7 Vertica Margin (dB) -23.60	7V by battery al Value Type peak	
Factor = Anter	Two-way rad 25℃ 960hPa Mode 2 Meter Reading (dBµV)	Factor (dB)	Mode Relat Test Ante Emission Level (dBµV/m)	tive Humidity Voltage nna Polarity Limits (dBµV/m) 74.00 54.00	55.4% DC 3.7 Vertica Margin (dB)	7V by battery al Value Type peak AVG	
Factor = Anter	Two-way rad 25 °C 960hPa Mode 2 Meter Reading (dBµV) 50.26	Factor (dB) 0.14	Mode Relat Test Ante Emission Level (dBµV/m) 50.40 41.52 50.88	tive Humidity Voltage nna Polarity Limits (dBµV/m) 74.00	55.4% DC 3.7 Vertica Margin (dB) -23.60 -12.48 -23.12	7V by battery al Value Type peak AVG peak	
Factor = Anter	Two-way rad 25 °C 960hPa Mode 2 Meter Reading (dBµV) 50.26 41.38	Factor (dB) 0.14 0.14	Mode Relation Test Ante Emission Level (dBµV/m) 50.40 41.52	tive Humidity Voltage nna Polarity Limits (dBµV/m) 74.00 54.00	55.4% DC 3.7 Vertica Margin (dB) -23.60 -12.48	7V by battery al Value Type peak AVG	
Factor = Anter	Two-way rad 25 °C 960hPa Mode 2 Meter Reading (dBµV) 50.26 41.38 48.52	Factor (dB) 0.14 0.14 2.36	Mode Relat Test Ante Emission Level (dBµV/m) 50.40 41.52 50.88	tive Humidity Voltage nna Polarity Limits (dBμV/m) 74.00 54.00 74.00	55.4% DC 3.7 Vertica Margin (dB) -23.60 -12.48 -23.12	7V by battery al Value Type peak AVG peak	
Factor = Anter	Two-way rad 25 °C 960hPa Mode 2 Meter Reading (dBµV) 50.26 41.38 48.52	Factor (dB) 0.14 0.14 2.36	Mode Relat Test Ante Emission Level (dBµV/m) 50.40 41.52 50.88	tive Humidity Voltage nna Polarity Limits (dBμV/m) 74.00 54.00 74.00	55.4% DC 3.7 Vertica Margin (dB) -23.60 -12.48 -23.12	7V by battery al Value Type peak AVG peak	

Radiated Emissions Test Results for Above 1GHz

RESULT: Pass



EUT Name	Two-way radio				Model Name		AWR4002DU	
Temperature	25 ℃	25 ℃				55.4%	55.4%	
Pressure	960hPa		Test Voltage		DC 3.7	DC 3.7V by battery		
Test Mode	Mode 3	Mode 3				Horizon	ntal	
Frequency	Meter Reading	Factor	Emissior	n Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV	//m)	(dBµV/m)	(dB)	value Type	
4960.012	50.36	0.22	50.5	58	74.00	-23.42	peak	
4960.012	40.25	0.22	40.4	17	54.00	-13.53	AVG	
7440.027	48.74	2.64	51.3	38	74.00	-22.62	peak	
7440.027	38.52	2.64	41.1	6	54.00	-12.84	AVG	
Remark:								
Factor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.					
EUT Name	Two-way radi	io		Mode	I Name	AWR40	02DU	
EUT Name Temperature	Two-way radi 25℃	io			I Name ive Humidity	AWR40	02DU	
		io		Relati		55.4%	002DU V by battery	
Temperature	25℃	io		Relati Test V	ive Humidity	55.4%	V by battery	
Temperature Pressure Test Mode	25℃ 960hPa Mode 3	io		Relati Test V Anten	ive Humidity /oltage nna Polarity	55.4% DC 3.7 Vertical	V by battery	
Temperature Pressure Test Mode Frequency	25℃ 960hPa Mode 3	Factor		Relati Test V Anten	ive Humidity /oltage nna Polarity	55.4% DC 3.7	V by battery	
Temperature Pressure Test Mode	25℃ 960hPa Mode 3			Relati Test V Anten	ive Humidity /oltage nna Polarity	55.4% DC 3.7 Vertical	V by battery	
Temperature Pressure Test Mode Frequency	25℃ 960hPa Mode 3	Factor	Emission	Relati Test V Anten	ive Humidity /oltage nna Polarity	55.4% DC 3.7 Vertical	V by battery	
Temperature Pressure Test Mode Frequency (MHz)	25℃ 960hPa Mode 3 Meter Reading (dBµV)	Factor (dB)	Emission (dBµV	Relati Test V Anten n Level //m) 35	ive Humidity /oltage na Polarity Limits (dBµV/m)	55.4% DC 3.7 ¹ Vertical Margin (dB)	V by battery Value Type	
Temperature Pressure Test Mode Frequency (MHz) 4960.013	25℃ 960hPa Mode 3 Meter Reading (dBμV) 50.63	Factor (dB) 0.22	Emissior (dBµV 50.8	Relati Test V Anten n Level //m) 35 47	ive Humidity /oltage nna Polarity Limits (dBµV/m) 74	55.4% DC 3.7 Vertical Margin (dB) -23.15	V by battery Value Type peak	
Temperature Pressure Test Mode Frequency (MHz) 4960.013 4960.013	25℃ 960hPa Mode 3 Meter Reading (dBμV) 50.63 41.25	Factor (dB) 0.22 0.22	Emissior (dBµV 50.8 41.4	Relati Test V Anten n Level //m) 35 47 50	ive Humidity /oltage nna Polarity Limits (dBµV/m) 74 54	55.4% DC 3.7 Vertical Margin (dB) -23.15 -12.53	V by battery Value Type peak AVG	
Temperature Pressure Test Mode Frequency (MHz) 4960.013 4960.013 7440.027	25℃ 960hPa Mode 3 Meter Reading (dBμV) 50.63 41.25 47.96	Factor (dB) 0.22 0.22 2.64	Emissior (dBµV 50.8 41.4 50.6	Relati Test V Anten n Level //m) 35 47 50	ive Humidity /oltage ma Polarity Limits (dBµV/m) 74 54 74	55.4% DC 3.7 ¹ Vertical Margin (dB) -23.15 -12.53 -23.40	V by battery Value Type peak AVG peak	
Temperature Pressure Test Mode Frequency (MHz) 4960.013 4960.013 7440.027	25℃ 960hPa Mode 3 Meter Reading (dBμV) 50.63 41.25 47.96	Factor (dB) 0.22 0.22 2.64	Emissior (dBµV 50.8 41.4 50.6	Relati Test V Anten n Level //m) 35 47 50	ive Humidity /oltage ma Polarity Limits (dBµV/m) 74 54 74	55.4% DC 3.7 ¹ Vertical Margin (dB) -23.15 -12.53 -23.40	V by battery Value Type peak AVG peak	
Temperature Pressure Test Mode Frequency (MHz) 4960.013 4960.013 7440.027	25℃ 960hPa Mode 3 Meter Reading (dBμV) 50.63 41.25 47.96	Factor (dB) 0.22 0.22 2.64	Emissior (dBµV 50.8 41.4 50.6	Relati Test V Anten n Level //m) 35 47 50	ive Humidity /oltage ma Polarity Limits (dBµV/m) 74 54 74	55.4% DC 3.7 Vertical Margin (dB) -23.15 -12.53 -23.40	V by battery Value Type peak AVG peak	

RESULT: Pass

Note:


- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.




EUT Name	Two-way radio	Model Name	AWR4002DU
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 1	Antenna Polarity	Horizontal

Band Edge Emission Test Results for Restricted Bands

Test Graph for Peak Measurement

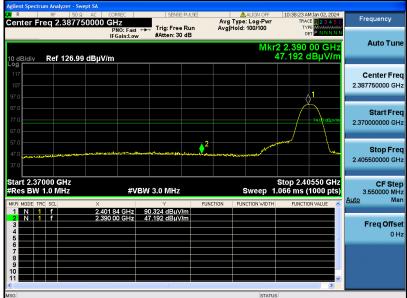

Test Graph for Average Measurement

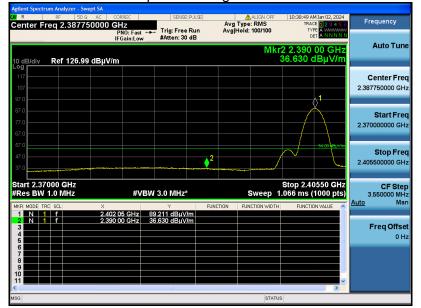

RESULT: Pass



EUT Name	Two-way radio	Model Name	AWR4002DU
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 1	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement




RESULT: Pass




EUT Name	Two-way radio	Model Name	AWR4002DU
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 3	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

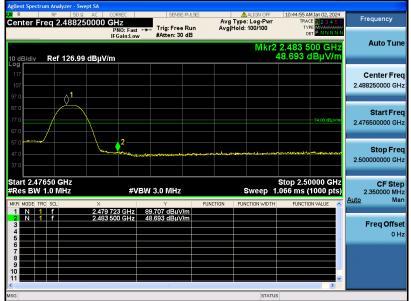

Test Graph for Average Measurement

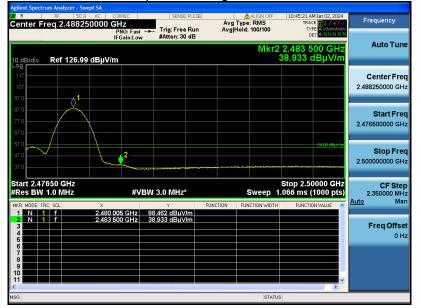


RESULT: Pass




EUT Name	Two-way radio	Model Name	AWR4002DU
Temperature	25℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 3	Antenna Polarity	Vertical

Band Edge Emission Test Results for Restricted Bands

Test Graph for Peak Measurement

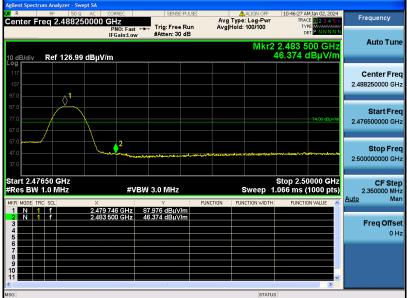

Test Graph for Average Measurement

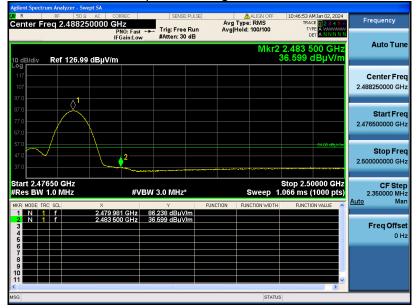

RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



12. AC Power Line Conducted Emission Test

12.1 Measurement Limit


En anna an	Maximum RF Line Voltage		
Frequency	Q.P. (dBµV)	Average (dBµV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

12.2 Measurement Setup (Block Diagram of Configuration)

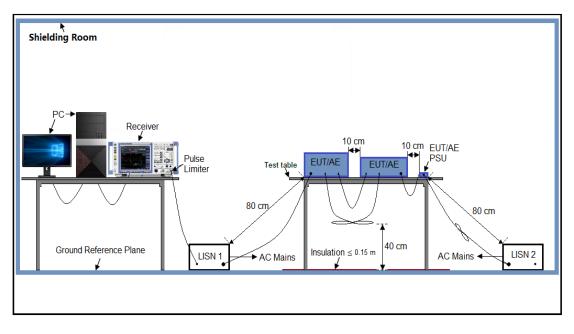



12.3 Preliminary Procedure of Line Conducted Emission Test

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

12.5 Measurement Results



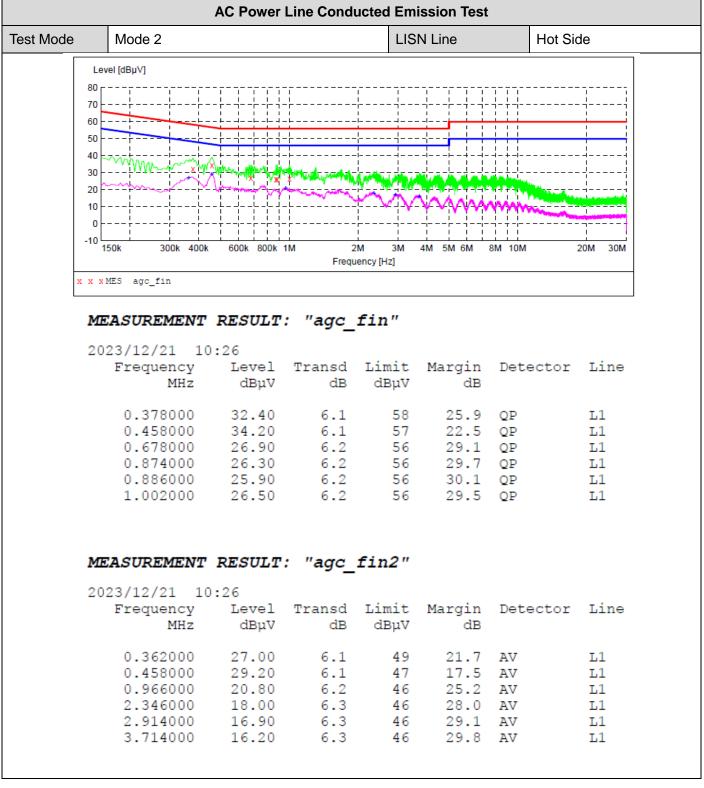


RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



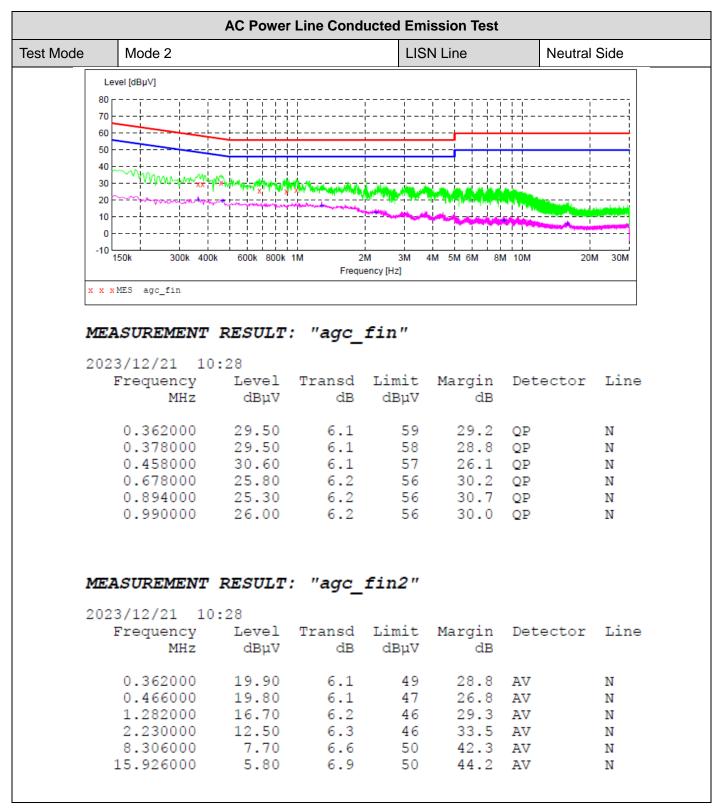

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Report No.: AGC09626231201FR02 Page 52 of 52

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC09626231201AP01

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC09626231201AP02

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.