

Prüfbericht-Nr.: Test report no.:	CN23HQZY 003	Auftrags-Nr.: Order no.:	168417547	Seite 1 von 23 Page 1 of 23
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2023-03-09	
Auftraggeber: Client:	Promethean Ltd. Promethean House, Lower Philips Rd, Blackburn, United Kingdom, BB1 5TH			
Prüfgegenstand: Test item:	OPS-A			
Bezeichnung / Typ-Nr.: Identification / Type no.:	OPS-A1-8R64S, OPS-A1-4R32S			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	CFR47 FCC Part 15: Subpart E Section 15.407 RSS-247 Issue 2 February 2017 RSS-Gen Issue 5 March 2019			
Wareneingangsdatum: Date of sample receipt:	2023-03-13	Please refer to Photo Document		
Prüfmuster-Nr.: Test sample no.:	A003427527-002~003 A003427527-006~010			
Prüfzeitraum: Testing period:	2023-03-24 - 2023-04-03			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:			genehmigt von: authorized by:	
Datum: Date: 2023-04-24	Signed by: Bell Hu		Ausstellungsdatum: Issue date: 2023-04-24	Signed by: Lin Lin
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert
Sonstiges / Other:	FCC ID: QAM024 IC: 5459A-024 HVIN: OPS-A1-8R64S, OPS-A1-4R32S This report is for 5GHz Wi-Fi.			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

V05

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 FREQUENCY STABILITY

RESULT: Pass

5.1.5 26dB BANDWIDTH AND 99% BANDWIDTH

RESULT: Pass

5.1.6 6dB BANDWIDTH

RESULT: Pass

5.1.7 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.8 DYNAMIC FREQUENCY SELECTION (DFS)

RESULT: Pass

5.1.9 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	10
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.5	SUBMITTED DOCUMENTS.....	10
4	TEST SET-UP AND OPERATION MODES	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION	11
4.2	TEST OPERATION AND TEST SOFTWARE	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	11
4.5	TEST SETUP DIAGRAM	12
5	TEST RESULTS	14
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	14
5.1.1	<i>Antenna Requirement</i>	<i>14</i>
5.1.2	<i>Maximum Peak Conducted Output Power</i>	<i>15</i>
5.1.3	<i>Conducted Power Spectral Density</i>	<i>16</i>
5.1.4	<i>Frequency Stability.....</i>	<i>17</i>
5.1.5	<i>26dB Bandwidth and 99% Bandwidth</i>	<i>18</i>
5.1.6	<i>6dB Bandwidth</i>	<i>19</i>
5.1.7	<i>Radiated Spurious Emission</i>	<i>20</i>
5.1.8	<i>Dynamic Frequency Selection (DFS).....</i>	<i>21</i>
5.1.9	<i>Conducted Emission on AC Mains.....</i>	<i>22</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	23
7	LIST OF TABLES.....	23

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of 5GHz Wi-Fi

Appendix B: Photographs of the Test Set-up

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

No.362, Huanguan Middle Road, Songyuansha Community, Guanhu Subdistrict, Longhua District, Shenzhen 518110, Guangdong, China

FCC Registration No.: 694916

ISED wireless device testing laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (SRD-Tonscend)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY60241175	2023-10-10
MXG X-Series RF Vector Signal Generator	Keysight	N5182B	MY61250137	2023-10-10
EXG X-Series Microwave Analog Signal Generator	Keysight	N5173B	MY61250141	2023-10-10
DC power supply	Keysight	E3642A	MY61276100	2023-10-10
Power Control Unit	Tonscend	JS0806-4ADC	N/A	2023-10-10
Automation Control Unit	Tonscend	JS0806-2	21C8060396	2023-10-10
Test Software	Tonscend	JS1120-3	N/A	N/A
Control PC	Lenovo	TianYi510S-071MB	YLY23JMF	N/A
Shielding Room 8#	Albatross	SR8	APC17151-SR8	2024-06-22
Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2023-08-02
Signal Analyzer	R&S	FSV 40	101439	2023-08-01
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	2023-08-01
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2023-08-02
Amplifier	R&S	SCU-18F	180070	2023-08-02
Amplifier	R&S	SCU40A	100475	2023-08-02
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-08-06
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2024-08-06
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2024-08-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2023-08-06
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A

Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-06-22

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102428	2023-07-31
Artificial Mains Network	R&S	ENV216	102333	2023-08-01
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty (k=2)
RF output power, conducted	± 0.99 dB
Occupied Channel Bandwidth	± 2.08 %
RF power density, conducted	± 0.99 dB
Unwanted Emissions, conducted	± 0.89 dB
All emissions, radiated	±4.17 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. File for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No.362, Huanguan Middle Road, Songyuansha Community, Guanhu Subdistrict, Longhua District, Shenzhen 518110, Guangdong, China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is an OPS-A, which supports Bluetooth(dual mode), 2.4GHz Wi-Fi 802.11 b/g/n/ax and 5GHz Wi-Fi 802.11a/n/ac/ax wireless technology.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	OPS-A
Type Designation:	OPS-A1-8R64S, OPS-A1-4R32S
FCC ID:	QAM024
IC ID:	5459A-024
PMN:	OPS-A
HVIN:	OPS-A1-8R64S, OPS-A1-4R32S
Operating Voltage:	12V~19V DC input via panel JAE port
Testing Voltage:	AC 120V, 60Hz
Technical Specification of Bluetooth (dual mode)	
Operating Frequency:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Channel Number:	BDR & EDR mode:79 channels; Low Energy mode:40 channels
Channel Separation:	BDR & EDR mode: 1MHz, 2MHz; Low Energy mode: 2MHz
Data Rate:	BDR & EDR mode: 1Mbps, 2Mbps, 3Mbps Low Energy mode: 1Mbps, 2Mbps
Antenna Type:	External Antenna
Antenna Gain of Bluetooth:	5.0 dBi Max(As detailed in Antenna spec)
Technical Specification of Wi-Fi 802.11 b/g/n/ax	
Operating Frequency:	2412 - 2462 MHz for 802.11b/g/n(HT20)/ax(HE20) 2422 - 2452 MHz for 802.11n(HT40)/ax(HE40)
Type of Modulation:	802.11b: CCK, DQPSK, DBPSK 802.11g/n : BPSK, QPSK, 16QAM, 64QAM 802.11ax: BPSK, QPSK, 16QAM, 6 4QAM, 256QAM, 1024QAM
Data Rate:	1/2/5.5/11 Mbps for 802.11b 6/9/12/18/24/36/48/54 Mbps for 802.11g MCS0~MCS 7 for 802.11n(HT20/40) MCS0~MCS11 for 802.11ax(HE20/40) (All data rates considered, only the Worst-cases reported)
Channel Number:	11 channels for 802.11b/g/n(HT20)/ax(HE20) 7 channels for 802.11n(HT40)/ax(HE40)
Channel Separation:	5 MHz
Antenna Type:	External Antenna
Number of Antenna:	2

Prüfbericht - Nr.: CN23HQZY 003
Test Report No.:

Seite 8 von 23

Page 8 of 23

Antenna Gain:	5.0 dBi Max(As detailed in Antenna spec)
Note: WLAN 2.4GHz 802.11n and 802.11ax support. For directional gain: Array Gain = $10 \log(NANT/NSS)$ dB. So the Directional gain = GANT + $10 \log(NANT)$ dBi (The worst case directional gain will occur when NSS = 1).	
Technical Specification of Wi-Fi 802.11 a/n/ac/ax	
Operating Frequency:	5180-5320MHz, 5500-5700MHz, 5745-5825MHz
Type of Modulation:	802.11n/a: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Protocol:	802.11 a/n20/n40/ac20/ac40/ac80/ ax20/ax40/ax80
Data Rate:	6/9/12/18/24/36/48/54 Mbps for 802.11a MCS0~MCS7 for 802.11n MCS0~MCS9 for 802.11ac MCS0~MCS11 for 802.11ax (All data rates considered, only the Worst-cases reported)
Channel Separation	5 MHz
Antenna Type:	External Antenna
Number of Antenna:	2
Antenna Gain:	5.0 dBi Max(As detailed in Antenna spec)
TPC function:	Supported
Type of Device	Slave Device without Radar Detection
Note: WLAN 5GHz 802.11n/802.11ac/802.11ax. For directional gain: Array Gain = $10 \log(NANT/NSS)$ dB. So the Directional gain = GANT + $10 \log(NANT)$ dBi (The worst case directional gain will occur when NSS = 1).	

Table 3: RF Channel and Frequency of 5GHz Wi-Fi 802.11 a/n/ac/ax

U-NII-1					
20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

U-NII-2A					
20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

U-NII-2C					
20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	134	5670	/	/
112	5560	/	/		
116	5580				
132	5660				
136	5680				
140	5700				

U-NII-3					
20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wi-Fi 802.11 a/n wireless transmitting mode
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- B. On, Normal operation
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- | | |
|------------------------------|-------------------------|
| - Application Form | - User Manual |
| - ID Label and Location Info | - Operation Description |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model OPS-A1-8R64S in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 4: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N
Laptop	Lenovo	T480	PF-16A6N8
Portable Laptop	Lenovo	ThinkPad T480	10Q67059
Test Board	Promethean Ltd.	/	SN: RESX-LG-2204070022
AC/DC Adapter	MOSO	XKD-Z3000IC 12.0-36W II	Input: 100-240V AC, 50/60Hz, 1.0A MAX Output: DC 12V 3A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

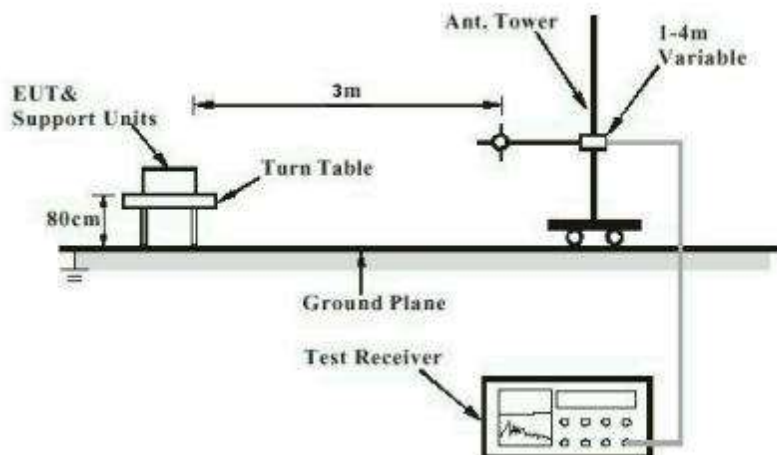


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

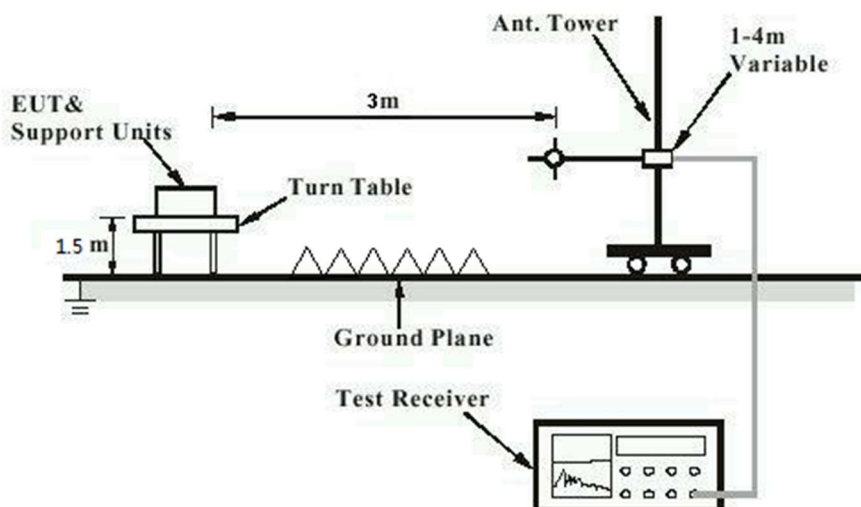


Diagram of Measurement Configuration for Mains Conduction Measurement

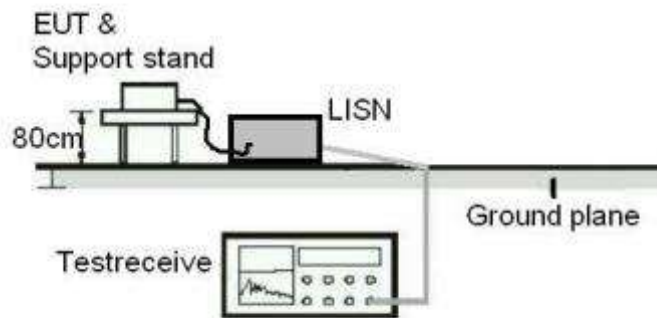


Diagram of Measurement Configuration for Conducted Transmitter Measurement


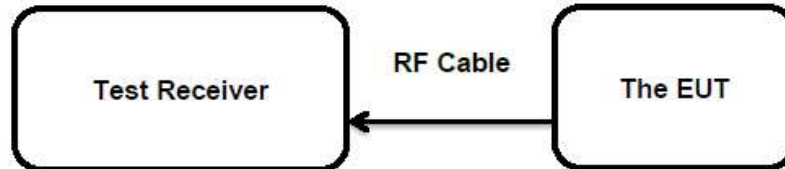


Diagram of Measurement Configuration for Dynamic Frequency Selection (DFS)

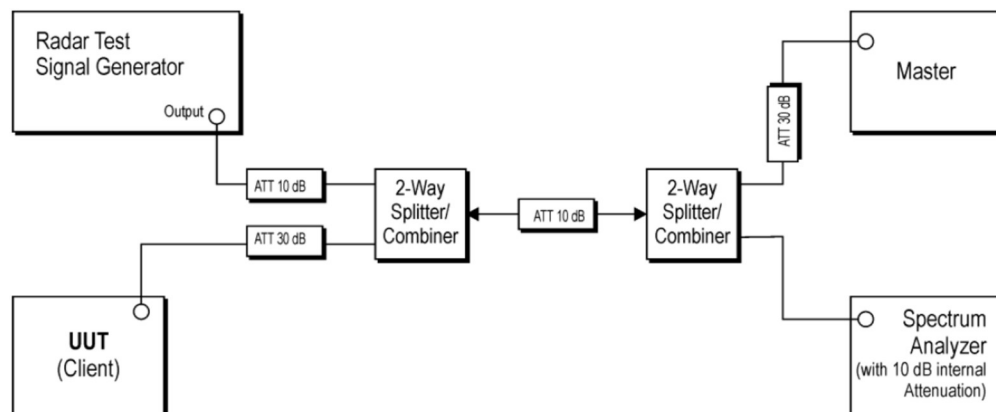

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.203
RSS-Gen Clause 6.8

The EUT have External Antennas, the Maximum antenna gain of antenna is 5.0 dBi, and Non-standard connector (RP-SMA) designed, no consideration of replacement.

Therefore, the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN23HQZY 003

Test Report No.:

Seite 15 von 23

Page 15 of 23

5.1.2 Maximum Peak Conducted Output Power

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.407(a)(1)&(2)&(4) RSS-247 clause 6.2
Basic standard	: ANSI C63.10: 2013
Limits	: FCC: <250mW (24dBm) (5150-5250MHz) * <250mW (24dBm) (5250-5350MHz, 5470-5725MHz) * 250 mW (24dBm) or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz, where is lesser. <1W (30dBm) (5725-5850MHz) IC: * Max e.i.r.p. < 200mW (23dBm) (5150-5250MHz) * 200 mW (23dBm) or 10 dBm + 10 log B, where B is the 99% emission bandwidth in MHz, where is lesser. * Max conducted output power < 250mW (24dBm) (5250-5350MHz) * 250 mW (24dBm) or 11 dBm + 10 log B, where B is the 99% emission bandwidth in MHz, where is lesser. * Max e.i.r.p. < 1W (30dBm) (5250-5350MHz) * 1 W (30dBm) or 17 dBm + 10 log B, where B is the 99% emission bandwidth in MHz, where is lesser. Max conducted output power < 1W (30dBm) (5725-5850MHz)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-03-24 to 2023-04-03
Input voltage	: AC 120V, 60Hz
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.1 °C
Relative humidity	: 61 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Note: Per RSS-247 section 6.2.3, transmission on channels which overlap 5600-5650MHz is prohibited.
This device is not support 5600-5650MHz radio-frequency operating band.

5.1.3 Conducted Power Spectral Density

RESULT:**Pass****Test Specification**

Test standard	: FCC part 15.407(a) RSS-247 clause 6.2
Basic standard	: ANSI C63.10: 2013 KDB 789033 D02 v01r03
Limits	: FCC: <11dBm/MHz (5150-5250MHz 5250-5350MHz, 5470-5725MHz) <30dBm/500KHz (5725-5850MHz) IC: e.i.r.p. spectral density <10dBm/MHz (5150-5250MHz) <11dBm/1MHz (5250-5350MHz) <30dBm/500KHz (5725-5850MHz)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-03-24 to 2023-04-03
Input voltage	: AC 120V, 60Hz
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.1 °C
Relative humidity	: 61 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: **CN23HQZY 003**
Test Report No.:Seite 17 von 23
Page 17 of 23

5.1.4 Frequency Stability

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.407(g)
RSS-Gen Clause 6.11
Basic standard : ANSI C63.10: 2013
Limits : Within assigned bands
Kind of test site : Shielded Room

Test Setup

Date of testing : 2023-03-24 to 2023-04-03
Input voltage : AC 120V, 60Hz
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 24.1 °C
Relative humidity : 61 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN23HQZY 003

Test Report No.:

Seite 18 von 23

Page 18 of 23

5.1.5 26dB Bandwidth and 99% Bandwidth**RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.407(e)
RSS-Gen Clause 6.6
Basic standard : ANSI C63.10: 2013
Limits : N/A
Kind of test site : Shielded Room

Test Setup

Date of testing : 2023-03-24 to 2023-04-03
Input voltage : AC 120V, 60Hz
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 24.1 °C
Relative humidity : 61 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix A.

5.1.6 6dB Bandwidth**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.407(e) RSS-Gen Clause 6.6
Basic standard	: ANSI C63.10: 2013
Limits	: At least 500KHz (5725-5850MHz)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-03-24 to 2023-04-03
Input voltage	: AC 120V, 60Hz
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.1 °C
Relative humidity	: 61 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

5.1.7 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.407(b) & FCC Part 15.205 & FCC Part 15.209 RSS-247 clause 6.2 & RSS-GEN clause 8.9 and 8.10
Basic standard	: ANSI C63.10: 2013 KDB 789033 D02 v01r03
Limits	: • For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. • For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. • For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. Emissions outside the band 5470-5600 MHz and 5650-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p. • For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. • Restricted Bands meet the requirement of 15.209 limit and RSS-GEN
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2023-03-31 to 2023-04-01
Input voltage	: AC 120V, 60Hz
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN23HQZY 003

Test Report No.:

Seite 21 von 23

Page 21 of 23

5.1.8 Dynamic Frequency Selection (DFS)

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.407(h) RSS-247 clause 6.3
Basic standard	: ANSI C63.10: 2013
Limits	: 5250-5350MHz, 5470-5725MHz Channel Move Time: Within 10 seconds. Channel Closing Transmission Time: 200ms+aggregate of 60ms over remaining 10s period; Non-Occupancy Period: at least 30 minutes.
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-03-24 to 2023-04-03
Input voltage	: AC 120V, 60Hz
Operation mode	: A
Test channel	: CH 58, CH 106
Ambient temperature	: 24.1 °C
Relative humidity	: 61 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: **CN23HQZY 003**
Test Report No.:Seite 22 von 23
Page 22 of 23

5.1.9 Conducted Emission on AC Mains

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.207(a) RSS-Gen Clause 8.8
Basic standard	: ANSI C63.10: 2013
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a) RSS-Gen Table 4
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2023-03-27
Input voltage	: AC 120V, 60Hz
Operation mode	: B
Earthing	: Not connected
Ambient temperature	: 23.2 °C
Relative humidity	: 50.6 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Technical Specification of EUT	7
Table 3: RF Channel and Frequency of 5GHz Wi-Fi 802.11 a/n/ac/ax.....	9
Table 4: List of Accessories and Auxiliary Equipment.....	11