

EMC TEST REPORT For FCC



Test Report No. : CTK02-F084

Date of Issue : June 17. 2002

Model/Type No: : Corecess 3213

Kind of Product : VDSL Modem

Applicant : Corecess Inc.

Applicant Address : 997-4 Daechi-Dong, Kangnam-Ku, Seoul, 135-280, Korea

Manufacturer : Corecess Inc.

Manufacturer Address : 997-4 Daechi-Dong, Kangnam-Ku, Seoul, 135-280, Korea

Contact Person : Kim Ho-Joong

Telephone : +82-2-3016-6859

Received Date : June 3. 2002

Test period : Start: June 12. 2002 End: June 13. 2002

Test Results : ☒ **In Compliance** ☐ **Not in Compliance**

The test results presented in this report relate only to the object tested.


CERTiTEK Standards Laboratory Co., Ltd. is accredited by Korea Laboratory Accreditation Scheme (KOLAS) which signed the International Laboratory Accreditation Cooperation (ILAC) Mutual Recognition Arrangement (MRA) for the above test item(s) and test method(s).

Tested by



Michael Jang
EMC Test Engineer
Date: June 17. 2002

Reviewed by



James Hong
EMC Technical Manager
Date: June 17. 2002

REPORT REVISION HISTORY

Date	Revision	Page No
June 17. 2002	(CTK02-F084) Issued	All

This report shall not be reproduced except in full, without the written approval of CERTiTEK Standards Laboratory Co., Ltd. This document may be altered or revised by CERTiTEK Standards Laboratory Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CERTiTEK Standards Laboratory Co., Ltd. will constitute fraud and shall nullify the document.

TABLE OF CONTENTS

1.0 General Product Description	4
1.1 Model Differences	4
1.2 Device Modifications.....	4
1.3 EUT Configuration(s)	5
1.4 Test Software	5
1.5 EUT Operating Mode(s).....	5
1.6 Calibration Details of Equipment Used for Measurement	6
1.7 Test Facility	6
1.8 Measurement Procedure	6
1.9 Laboratory Accreditations and Listings	7
2.0 Emissions Test Regulations.....	8
2.1 Conducted Voltage Emissions	9
2.2 Radiated Electric Field Emissions.....	10
Configurations	11
APPENDIX A - TEST DATA.....	12
Conducted Voltage Emissions (Quasi-Peak reading)	12
Radiated Electric Field Emissions (Quasi-Peak reading).....	14

1.0 General Product Description

1.0.1 Tested Equipment

- ☒ Unless otherwise indicated, all tests were conducted on Model Corecess 3213.
- ☐ Tests performed on Model _____ were considered to be representative of Model(s) _____.

1.0.2 Equipment Size, Mobility and Identification

Dimensions: 140 by 150 by 30 ☒ mm ☐ in
Mobility: ☐ Hand-Held ☒ Table-top ☐ Floor-standing
☐
Serial No.: Not applicable

1.0.3 Electrical Ratings

Adaptor
Input: 100-240V 50/60Hz
Output: 5Vdc 2.0A

VDSL Modem
Input: 5Vdc
Output: Not applicable

1.0.4 Test Voltage & Frequency

Unless indicated otherwise on the individual data sheet or test results, the test voltage and frequency was as indicated below.

Voltage: 120V
Frequency: 60Hz

1.0.5 Clock & Other Frequencies Utilized

25MHz

1.1 Model Differences

Not applicable

1.2 Device Modifications

The following modifications were necessary for compliance:

Not applicable

1.3 EUT Configuration(s)

See Appendix A for individual test set-up configuration(s). The following peripheral devices and/or interface cables were connected during the measurement:

☒ Peripheral Devices

Device	Manufacturer	Model No.	Serial No.	FCC ID or DoC
PC	Hewlett Packard	DTPC-17	SG01703009	DOC
VDSL Multiplexer	Corecess Inc	DSLlinX 6624	-	-
Printer	Hewlett Packard	C4530A	US7A91703J	DOC
Monitor	Hewlett Packard	D2813	TW61100109	A3KM043
USB Mouse	PANWEST	Cyber Beetle	PM1F184045737	DOC
Serial Mouse	Microsoft	BASM1	4476257-20000	DOC
PS/2 Mouse	PANWEST	Cyber Beetle	PM1F144009938	DOC
Keyboard	WORLD COM MART	KB120	-	D840902 MIC
Game Pad	Microsoft	SideWinder™ game pad	03426631	C3KMGP1
Headset	CAMAC	CMK-C3	-	-
Phone	SAMSUNG	-	-	-

☒ Cable Description

#	Description	Ferrited	Length (m)	Other Details
1	PC Power Cable, Unshielded	No	1.8	Connect to AC Power
2	EUT LAN Cable, Unshielded	No	2.1	Between PC and EUT
3	Adaptor Output Cable, Unshielded	Yes	1.8	Between EUT and Adaptor
4	Adaptor Power Cable, Unshielded	No	1.8	Connect to AC Power
5	EUT LINE Cable, Unshielded	No	3.0	Between EUT and VDSL Multiplexer
6	VDSL Multiplexer Power Cable, Unshielded	No	1.8	Connect to AC Power
7	Printer Signal Cable, Shielded	No	1.8	Between PC and Printer
8	Printer Power Cable, Unshielded	No	1.8	Connect to AC Power
9	Monitor Signal Cable, Shielded	Yes	1.5	Between PC and Monitor
10	Monitor Power Cable, Unshielded	No	1.8	Connect to AC Power
11	USB Mouse Cable, Shielded	No	1.8	Connect to PC
12	Serial Mouse Cable, Shielded	No	1.8	Connect to PC
13	PS/2 Mouse Cable, Shielded	No	1.8	Connect to PC
14	Keyboard Cable, Shielded	No	1.5	Connect to PC
15	Game Pad Cable, Shielded	No	1.8	Connect to PC
16	Headset Cable, Unshielded	No	3.0	Connect to PC
17	Line In Cable, Unshielded	No	1.5	Connect to PC
18	Phone Cable, Unshielded	No	1.8	Between EUT and Phone

n/a = not available

1.4 Test Software

☒ Pinging

☐ _____

1.5 EUT Operating Mode(s)

Equipment under test was operated during the measurement under the following conditions:

☐ Test program (H-Pattern)

☐ Standby

☒ Practice operation

☐ Test program (color bar)

☐ Test program (customer specific)

1.6 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

1.7 Test Facility

The measurement facility is located at 386-1, Ho-Dong, Yongin-City, Kyungki-Do, Korea 449-100. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.8 Measurement Procedure

Preliminary AC power line conducted emissions tests were performed shielded room. To find worst mode, several typical mode and typical cable position were tested. Final AC power line conducted emissions test was performed shielded room. (location is same as Preliminary test)

Based on the preliminary tests of the EUT, final test was proceeded worst case test mode and cable configuration.

Preliminary radiated emissions test were performed anechoic chamber (Distance of antenna and EUT was 3 m). To find worst mode, several typical mode and typical cable position were tested and peak level and frequency were recorded.

Final radiated emissions test was performed Open Area Test Site. Based on the preliminary tests of the EUT, final test was proceeded worst case test mode and cable configuration.

* Measurement procedures was In accordance with ANSI C63.4-1992 7.2.3, 7.2.4, 8.3.1.1, 8.3.1.2

1.9 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 and 10 meter Open Area Test Sites to perform FCC Part 15/18 measurements.	 93250
JAPAN	VCCI	10 meter Open Area Test Site and one conducted site.	 R-948, C-986
KOREA	MIC	EMI (CE, RE) EMS (ESD, BURST, RS, Surge, CS, Power-frequency Susceptibility, Voltage Dips and Short Interruptions)	 No. 51, KR0025
International	KOLAS	EMC	 KOREA LABORATORY ACCREDITATION SCHEME NO. 119

2.0 Emissions Test Regulations

The emissions tests were performed according to following regulations:

☐ EN 50081-1 /1992

☐ EN 55011 /1998

☐ Group 1

☐ Group 2

☐ Class A

☐ Class B

☐ EN 55013 /A12:1994

☐ EN 55014 /1987

☐ Household appliances and similar

☐ Portable tools

☐ Semiconductor devices

☐ EN 55014 /A2:1990

☐ EN 55014 /1993

☐ Household appliances and similar

☐ Portable tools

☐ Semiconductor devices

☐ EN 55015 /1987

☐ EN 55015 /A1:1990

☐ EN 55015 /1993

☐ EN 55022 /A1:1995

☐ Class A

☐ Class B

☐ EN 55022 /1998

☐ Class A

☐ Class B

☐ EN 61000-3-2 /1995 (EN 60555 Part 2 /4.87)

☐ EN 61000-3-3 /1995 (EN 60555 Part 3 /4.87)

☐ BS

☐ VCCI V-3/99.05 : 1999

☐ Class A

☐ Class B

☒ FCC Part 15 SUBPART B

☐ Class A

☒ Class B

☐ AS 3548 (1992)

☐ Class A

☐ Class B

☐ CISPR 11 (1990)

☐ Group 1

☐ Group 2

☐ Class A

☐ Class B

☐ CISPR 22 (1993)

☐ Class A

☐ Class B

2.1 Conducted Voltage Emissions

Test Date

June 12. 2002

Test Location

EMI-CE: Shielded Room

Test Instruments

☒ Field Strength Meter	Rohde Schwarz	ESHS30	828144/002
--	---------------	--------	------------

Test Accessories

☐ LISN	EMCO	3825/2	9206-1971
☒ LISN	EMCO	3825/2	9409-2246
☒ LISN	EMCO	3825/2	9607-2574
☒ Control PC	HP	Vectra 500	SG72000192

Frequency Range of Measurement

☐ 150 kHz to 30 MHz
☒ 450 kHz to 30 MHz
☐ _____

Instrument Settings

IF Band Width: 9 kHz

Test Results

The requirements are:

☒ MET	minimum margin is 5.9 dB μ V at 0.67MHz
☐ NOT MET	limit exceeded by maximum of ____ dB μ V at ____ MHz
☐ NOT APPLICABLE	

Remarks

See Appendix A for test data.

2.2 Radiated Electric Field Emissions

Test Date

June 13. 2002

Test Location

- ☐ EMI-OATS: Testing was performed at a test distance of 10 m
☒ EMI-OATS: Testing was performed at a test distance of 3 m

Test Instruments

☒ Field Strength Meter Rohde Schwarz ESVS30 826638/008

Test Accessories

☒ ULTRA Broadband Antenna	R & S	HL562	361324/014
☐ Biconical Antenna	Schwarzbeck	BBA9106	41-00201
☐ Biconical Antenna	EMCO	3110B	9607-2564
☐ Log-periodic Antenna	EMCO	3146	9607-4567

Frequency Range of Measurement

30 MHz to 1 GHz

Instrument Settings

IF Band Width: 120 kHz

Test Results


The requirements are:

- ☒ MET minimum margin is 12.5 dB ($\mu\text{V}/\text{m}$) at 75.20 MHz
☐ NOT MET limit exceeded by maximum of ____ dB($\mu\text{V}/\text{m}$) at ____ MHz
☐ NOT APPLICABLE

Remarks

See Appendix A for test data



Configuration

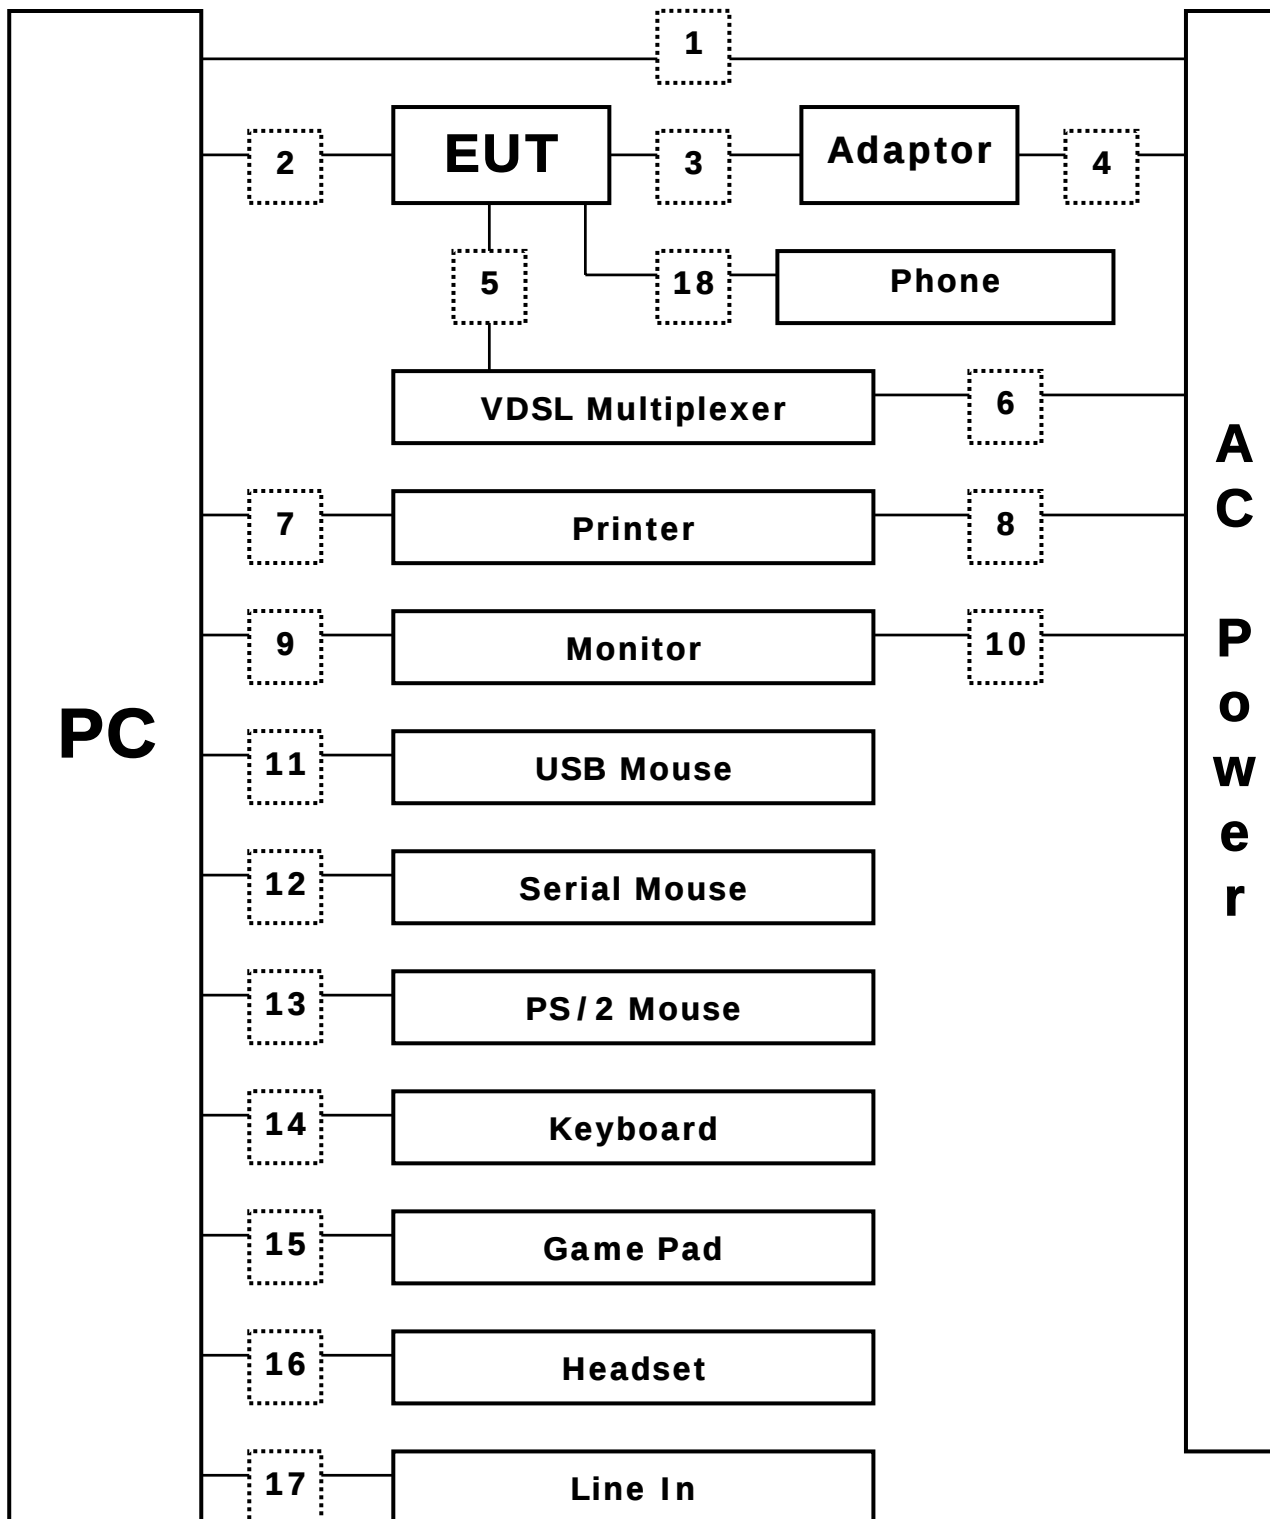

APPENDIX A – TEST DATA

Conducted Voltage Emissions (Quasi-Peak reading)

Frequency [MHz]	Correction Factor		Line	Quasi-peak				Average			
				Limit	Reading	Result	Margin	Limit	Reading	Result	Margin
	LISN	Cable		[dBuV]	[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dB]
0.53	0.3	0.1	L	48.0	38.1	38.5	9.5				
0.67	0.2	0.1	N	48.0	41.8	42.1	5.9				
0.92	0.2	0.1	N	48.0	39.3	39.6	8.4				
1.23	0.2	0.1	L	48.0	37.1	37.4	10.6				
1.36	0.2	0.1	L	48.0	35.7	36.0	12.0				
1.45	0.2	0.1	N	48.0	35.0	35.3	12.7				
2.48	0.3	0.1	N	48.0	29.6	30.0	18.0				
2.73	0.2	0.1	L	48.0	26.0	26.3	21.7				
4.21	0.3	0.1	L	48.0	23.6	24.0	24.0				
4.38	0.3	0.1	N	48.0	25.5	25.9	22.1				
9.36	0.3	0.1	L	48.0	22.4	22.8	25.2				
10.12	0.3	0.2	N	48.0	23.8	24.3	23.8				
15.86	0.2	0.2	N	48.0	22.8	23.2	24.8				
17.25	0.2	0.2	L	48.0	21.8	22.2	25.8				
25.00	0.6	0.4	N	48.0	33.8	34.8	13.2				
25.00	0.6	0.4	L	48.0	31.9	32.9	15.1				

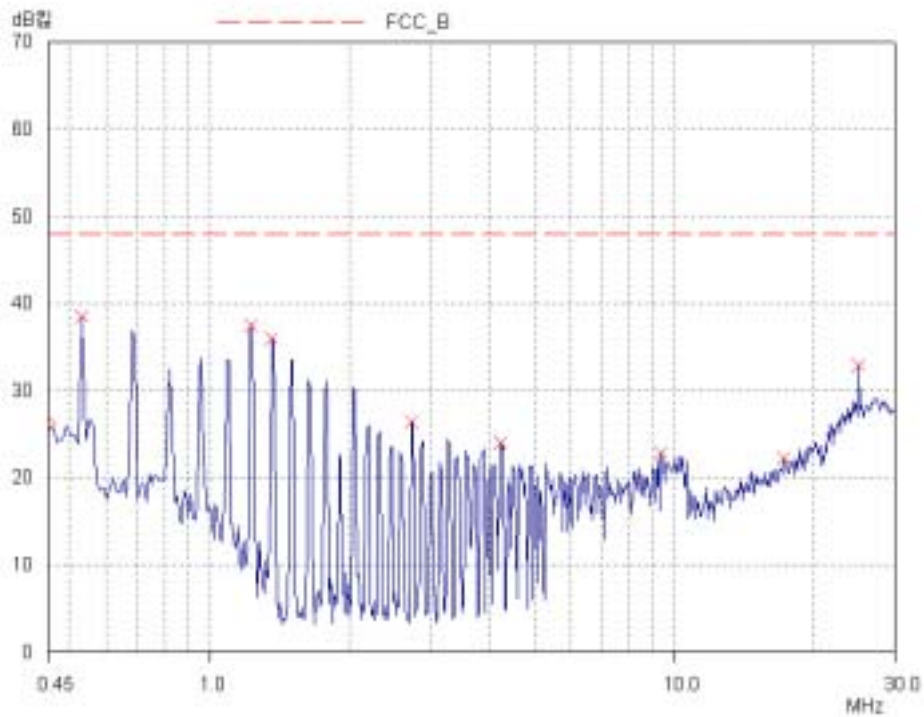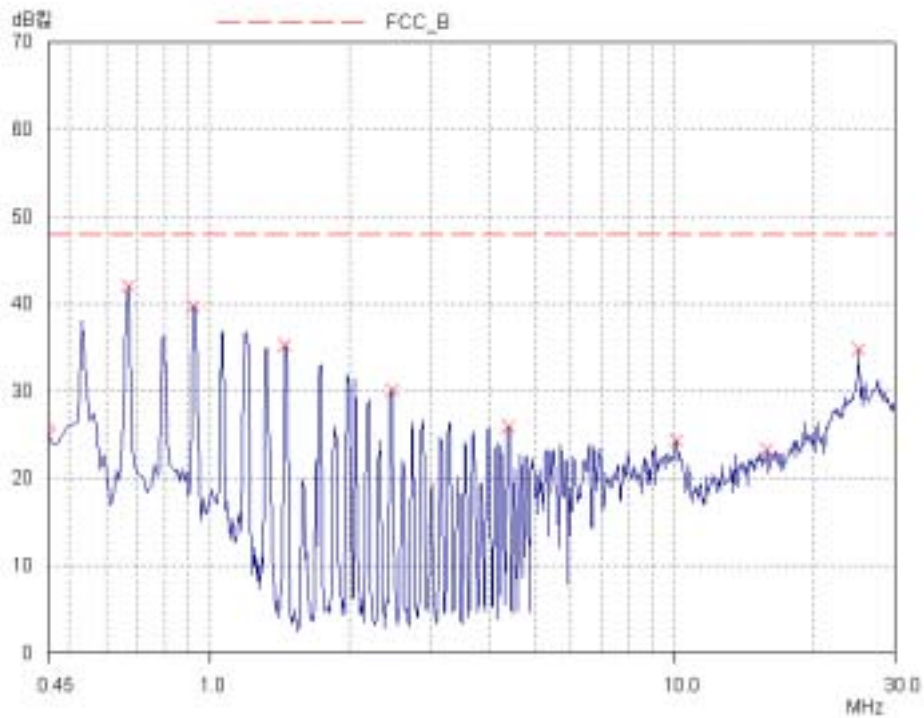

Radiated Electric Field Emissions (Quasi-Peak reading)

Frequency [MHz]	Reading [dBuV / m]	Pol.	Height [m]	Correction Factor		Limits [dBuV / m]	Result [dBuV / m]	Margin [dB]
				Antenna	Cable			
192.00	12.2	H	4.0	7.0	1.6	43.5	20.8	22.7
192.00	14.9	V	2.4	7.0	1.6	43.5	23.5	20.0
216.30	14.1	V	1.0	8.0	1.8	46.0	23.8	22.2
216.30	17.4	H	4.0	8.0	1.8	46.0	27.1	18.9
287.90	10.6	V	3.5	10.6	2.5	46.0	23.7	22.3
287.90	11.8	H	3.5	10.6	2.5	46.0	24.9	21.2
720.00	3.4	V	2.6	18.8	4.0	46.0	26.2	19.8
720.00	6.4	H	2.0	18.8	4.0	46.0	29.2	16.8