

**IEEE C95.1  
KDB 447498 D03  
47 C.F.R. Part 1, Subpart I, Section 1.1310  
47 C.F.R. Part 2, Subpart J, Section 2.1091**

## **RF EXPOSURE REPORT**

**For**

**aPowerPLUG**

**Model: AP680**

**Trade Name: apower**

*Issued to*

**ST&T Electric Corp.**

1F, No. 18, 31 Lane, Sec.1, Huan Dung Road, Tainan Science Park,  
Tainan 741, Taiwan

Issued By

**Compliance Certification Services Inc.**

**Tainan Laboratory**

**No.8,Jiucengling, Xinhua Dist., Tainan City  
712, Taiwan (R.O.C.)**

TEL: 886-6-580-2201

FAX: 886-6-580-2202

**<http://www.ccsrf.com>**

**E-Mail : [service@ccsrf.com](mailto:service@ccsrf.com)**

**Issued Date: November 30, 2016**





## Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	November 30, 2016	Initial Issue	ALL	Eva Lin



## TABLE OF CONTENTS

<b>1. LIMIT.....</b>	<b>4</b>
<b>2. EUT SPECIFICATION.....</b>	<b>5</b>
<b>3. TEST RESULTS .....</b>	<b>6</b>
<b>4. MAXIMUM PERMISSIBLE EXPOSURE .....</b>	<b>6</b>

# 1. TEST RESULT CERTIFICATION

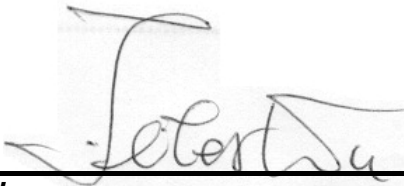
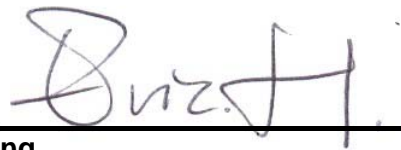
**We hereby certify that:**

The equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirement of the applicable standards. The test record, data evaluation and Equipment under Test (EUT) configurations represented herein are true and accurate accounts of the measurement of the sample's RF characteristics under the conditions specified in this report.

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
IEEE C95.1 2005 KDB 447498 D03 47 C.F.R. Part 1, Subpart I, Section 1.1310 47 C.F.R. Part 2, Subpart J, Section 2.1091	No non-compliance noted

**Approved by:**

**Reviewed by:**

**Jeter Wu**  
Assistant Manager

**Eric Huang**  
Assistant Section Manager

## 2. LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

## 3. EUT SPECIFICATION

<b>EUT</b>	aPowerPLUG
<b>Model</b>	AP680
<b>Brand</b>	apower
<b>RF Module</b>	CC2541
<b>Frequency band (Operating)</b>	<input type="checkbox"/> 802.11b/g/n HT20: 2.412GHz ~ 2.462GHz 802.11n HT40: 2.422GHz ~ 2.452GHz 802.11a/n HT20: 5.180GHz ~ 5.240GHz / 5.745 ~ 5.825GHz 802.11n HT40: 5.190GHz ~ 5.230GHz / 5.755~ 5.795GHz 802.11ac VHT80: 5.210GHz / 5.775GHz <input checked="" type="checkbox"/> Others
<b>Device category</b>	<input type="checkbox"/> Portable (<20cm separation) <input checked="" type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others
<b>Exposure classification</b>	<input type="checkbox"/> Occupational/Controlled exposure (S = 5mW/cm <sup>2</sup> ) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure (S=1mW/cm <sup>2</sup> )
<b>Antenna Specification</b>	PIFA Antenna / Gain: 1.12 dBi (Numeric gain: 1.29) worst
<b>Maximum Average output power</b>	Bluetooth 4.0: -14.01dBm (0.03972 mW)
<b>Evaluation applied</b>	<input checked="" type="checkbox"/> MPE Evaluation* <input type="checkbox"/> SAR Evaluation <input type="checkbox"/> N/A

## 4. TEST RESULTS

No non-compliance noted.

### Calculation

$$\text{Given } E = \frac{\sqrt{30 \times P \times G}}{d} \quad \& \quad S = \frac{E^2}{377}$$

Where  $E$  = Field strength in Volts / meter

$P$  = Power in Watts

$G$  = Numeric antenna gain

$d$  = Distance in meters

$S$  = Power density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{377 d^2}$$

Changing to units of mW and cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = d \text{ (m)} / 100$$

Yields

$$S = \frac{30 \times (P/1000) \times G}{377 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2} \quad \text{Equation 1}$$

Where  $d$  = Distance in cm

$P$  = Power in mW

$G$  = Numeric antenna gain

$S$  = Power density in mW / cm<sup>2</sup>

## 5. MAXIMUM PERMISSIBLE EXPOSURE

Substituting the MPE safe distance using  $d = 20$  cm into Equation 1:

$$S = 0.000199 \times P \times G$$

Where  $P$  = Power in mW

$G$  = Numeric antenna gain

$S$  = Power density in mW / cm<sup>2</sup>

### Bluetooth 4.0 mode:

Ch	Frq.(MHz)	P (mW)	Gain (num.)	D (cm)	Power density in mW / cm <sup>2</sup>	Limit (mW/cm2)	Result
High	2480	0.03972	1.29	20	0.0000	1	Pass