


Enterprise and Elte-MT Antenna


5 GHz

Electrical	
Frequency Range	4.9 - 5.875 GHz
Gain	19 dBi
VSWR, max.	1.7:1
3 dB Beam-Width, H-Plane, typ.	16 °
3 dB Beam-Width, E-Plane, typ.	16 °
Side Lobes	ETSI TS2
Polarization	Linear, Vertical and Horizontal
Cross Polarization, min.	-20 dB
Port to Port Isolation	-30 dB
Front to Back Ratio	ETSI TS2



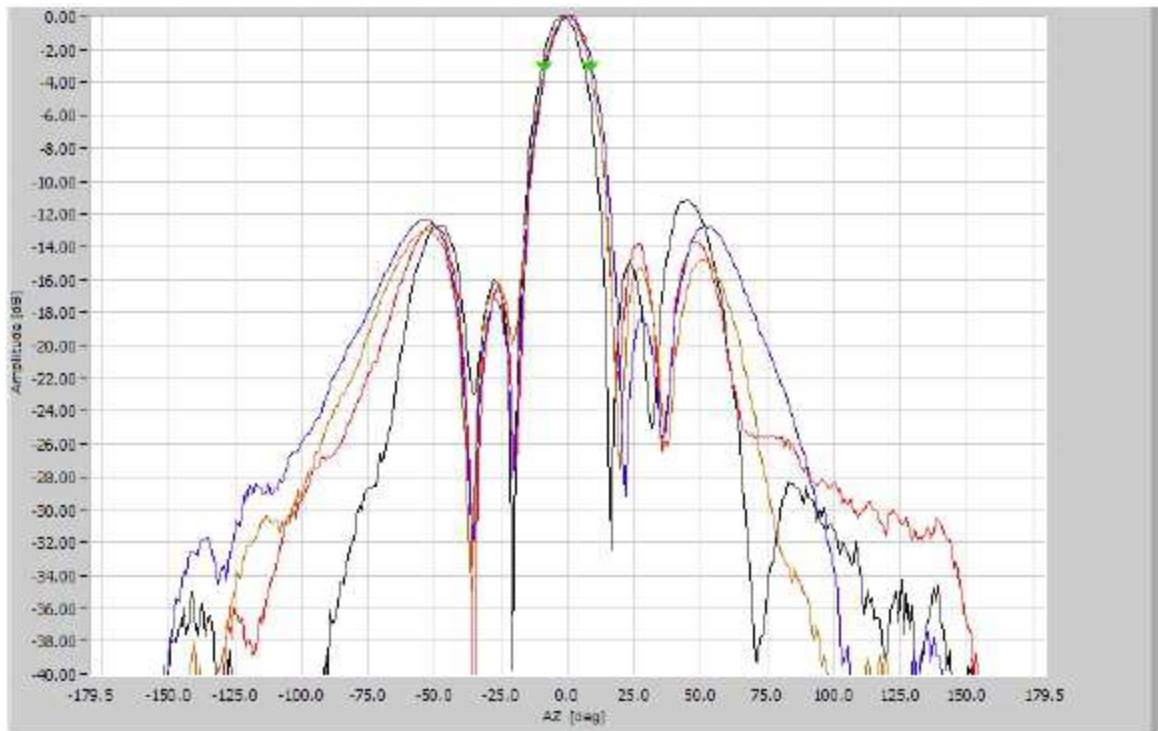


Horizontal Polarization – Elevation (H-plane)

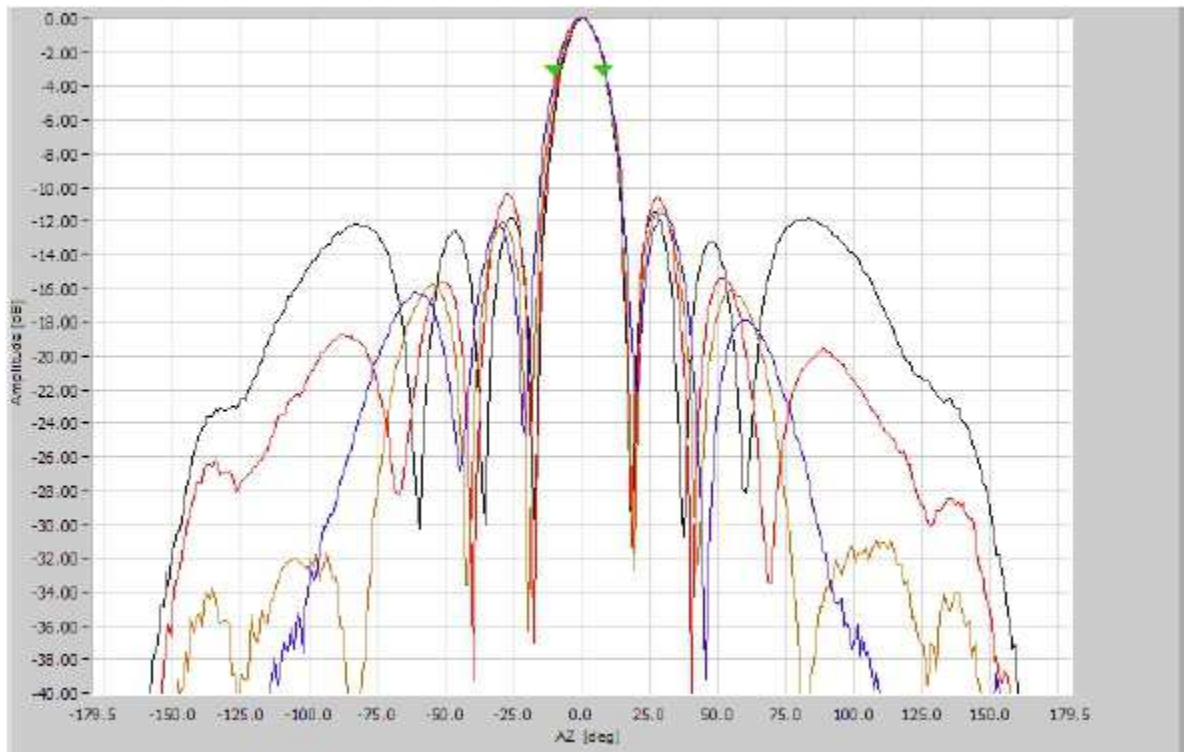


Horizontal Polarization – Azimuth (e-plane)



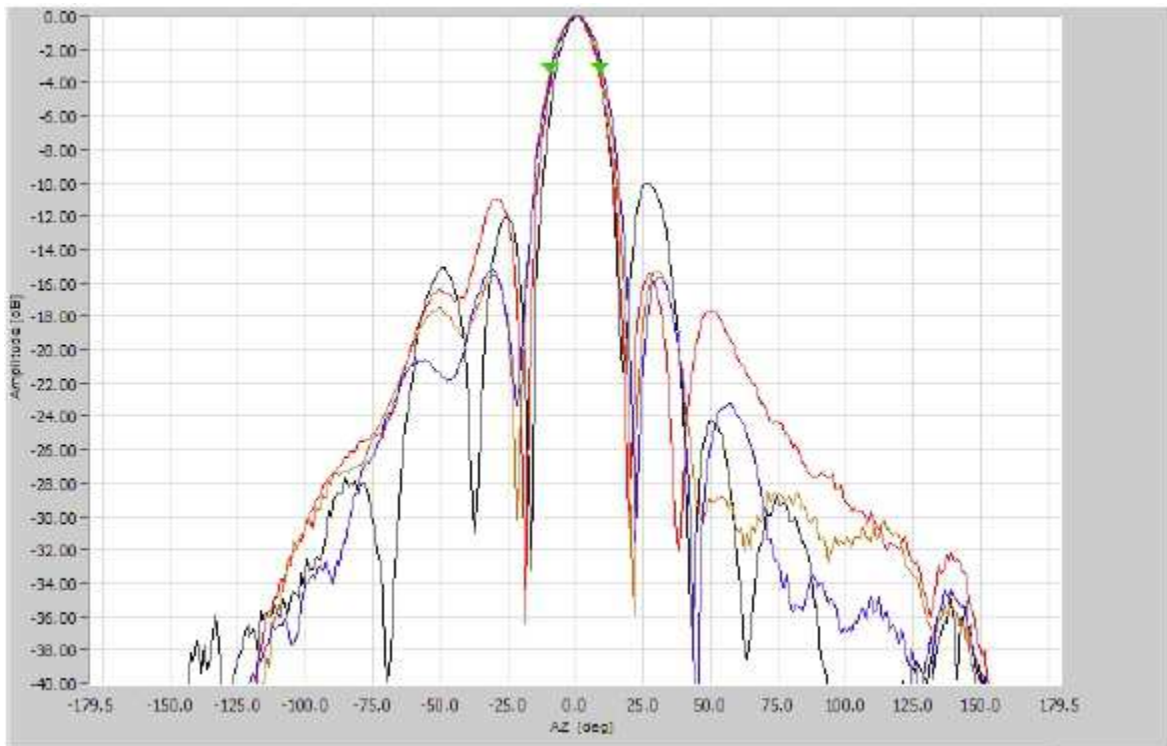

Vertical Polarization – Elevation (e-plane)

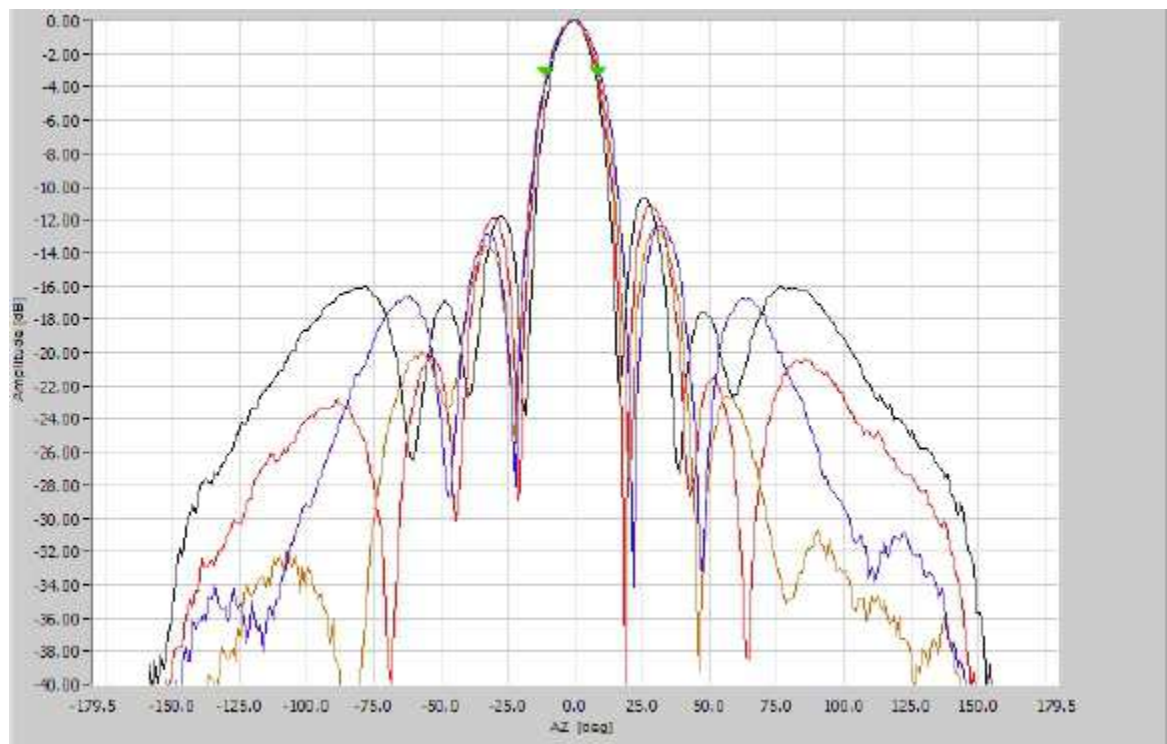

Vertical Polarization – Azimuth (h-plane)



