

Test report

337322-1TRFWL

Date of issue: November 13, 2017

Applicant:

Redline Communications

Product:

Broad-band wireless infrastructure product

Model:

RDL-3000-RMG

FCC ID:

QC8-RDL3000RMG3

IC Registration number:

4310A-RDL3000RMG3

Specifications:

- ◆ **FCC Part 90, Subpart Y**
Private Land Mobile Radio Services; Regulations governing licensing and use of frequencies in the 4940–4990 MHz band
- ◆ **RSS-111, Issue 5, September 4, 2014**
Broadband public safety equipment operating in the band 4940–4990 MHz

Test location

Company name:	Nemko Canada Inc.
Address:	303 River Road
City:	Ottawa
Province:	Ontario
Postal code:	K1V 1H2
Country:	Canada
Telephone:	+1 613 737 9680
Facsimile:	+1 613 737 9691
Toll free:	+1 800 563 6336
Website:	www.nemko.com
Site number:	FCC: CA2041; IC: 2040A-4 (3 m semi anechoic chamber)

Tested by:	Andrey Adelberg, Senior Wireless/EMC Specialist
Reviewed by:	Kevin Rose, Wireless/EMC Specialist
Date:	November 13, 2017
Signature:	

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

Table of contents

Table of contents	3
Section 1. Report summary	4
1.1 Applicant and manufacturer	4
1.2 Test specifications	4
1.3 Test methods	4
1.4 Statement of compliance	4
1.5 Exclusions	4
1.6 Test report revision history	4
Section 2. Summary of test results	5
2.1 RSS-Gen, Issue 4, test results	5
2.2 RSS-111, Issue 5, tests results	5
2.3 FCC Part 90, tests results	5
Section 3. Equipment under test (EUT) details	6
3.1 Sample information	6
3.2 EUT information	6
3.3 Technical information	6
3.4 Product description and theory of operation	6
3.5 EUT exercise details	6
3.6 EUT setup diagram	7
3.7 EUT sub assemblies	7
Section 4. Engineering considerations	8
4.1 Modifications incorporated in the EUT	8
4.2 Technical judgment	8
4.3 Deviations from laboratory tests procedures	8
Section 5. Test conditions	9
5.1 Atmospheric conditions	9
5.2 Power supply range	9
Section 6. Measurement uncertainty	10
Section 7. Test equipment	11
7.1 Test equipment list	11
Section 8. Testing data	12
8.1 RSS-Gen 8.8 AC power line conducted emissions limits	12
8.2 FCC 90.1215(d) and RSS-Gen 6.6 Occupied bandwidth	16
8.3 FCC 90.213(a) and RSS-111 Clause 5.2 Transmitter frequency stability	20
8.4 FCC 90.1215(a) and RSS-111 Clause 5.3 Transmit output power and PSD	22
8.5 FCC 90.1215(e) and RSS-111 Clause 5.4 Transmitter Peak to Average Power Ratio (PAPR)	31
8.6 FCC 90.210(m) and RSS-111 Clause 5.5 Transmitter unwanted emissions	33
Section 9. Block diagrams of test set-ups	47
9.1 Radiated emissions below 1 GHz set-up	47
9.2 Radiated emissions set-up for frequencies above 1 GHz	48
9.3 Conducted emissions set-up	48

Section 1. Report summary

1.1 Applicant and manufacturer

Company name	Redline Communications
Address	302 Town Center Blvd.
City	Markham
Province/State	Ontario
Postal/Zip code	L3R 0E8
Country	Canada

1.2 Test specifications

FCC Part 90, Subpart Y	Private Land Mobile Radio Services; Regulations governing licensing and use of frequencies in the 4940–4990 MHz band
RSS-111, Issue 5, September 2014	Broadband public safety equipment operating in the band 4940–4990 MHz

1.3 Test methods

971168 D01 Power Meas License Digital Systems v02r02	Measurement guidance for certification of licensed digital transmitters
662911 D01 Multiple Transmitter Output v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

1.4 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

1.5 Exclusions

None

1.6 Test report revision history

Revision #	Details of changes made to test report
TRF	Original report issued

Section 2. Summary of test results

2.1 RSS-Gen, Issue 4, test results

Clause	Test description	Verdict
6.6	Occupied bandwidth	Pass
7.1.2	Receiver Radiated Limits	Not applicable
7.1.3	Receiver Conducted Limits	Not applicable
8.8	AC power lines conducted emission limits	Pass

Note: According to sections 5.2 and 5.3 of RSS-Gen, Issue 4 the EUT does not have a stand-alone receiver neither scanner receiver, therefore exempt from receiver requirements.

2.2 RSS-111, Issue 5, tests results

Part	Test description	Verdict
5.1	Types of modulation	Pass ¹
5.2	Transmitter frequency stability	Pass
5.3	Equipment's transmit output power and channel bandwidth	Pass
5.4	Transmitter peak-to-average power ratio	Pass
5.5	Transmitter unwanted emissions	Pass

Notes: ¹ The EUT utilizes OFDM method of encoding digital modulations such as BPSK, QPSK, 16-QAM, 64-QAM, 128-QAM, and 256-QAM

2.3 FCC Part 90, tests results

Clause	Test description	Verdict
90.1215(d)	Occupied bandwidth	Pass
90.1215(a)	Peak output power	Pass
90.1215(b)	Peak power spectral density	Pass
90.210(m)	Spurious emissions at the antenna terminals	Pass
90.210(m)(6)	Radiated spurious emissions	Pass
90.213(a)	Frequency stability	Pass

Section 3. Equipment under test (EUT) details

3.1 Sample information

Receipt date	September 25, 2017
Nemko sample ID number	1

3.2 EUT information

Product name	Broad-band wireless infrastructure product
Model	RDL-3000-RMG
Serial number	157SC17180008

3.3 Technical information

Operating band	4940–4990 MHz
Operating frequency	5 MHz channel: 4942.5–4987.5 MHz 10 MHz channel: 4945–4985 MHz 20 MHz channel: 4950–4980 MHz
Modulation type	OFDM using 256-QAM, 128-QAM, 64-QAM, 16-QAM, QPSK and BPSK modulation for sub-carriers
Channel bandwidth	5 MHz, 10 MHz and 20 MHz
Emission designator	W7D
Power requirements	48 V _{DC} PoE via 120 V _{AC} , 60 Hz
Antenna information	L-COM HG5158DP-10U omni antenna 10 dBi 5100–5800 MHz Redline AOD-DB-0512-02 omni antenna 10 dBi 4940–5875 MHz Redline 30-00328-50 Dual Polarization Antenna 19 dBi 4900–5875 MHz Redline 30-00362-00 Dual Polarization Antenna 24 dBi 4900–6100 MHz Redline A3FT3204LTPD Parabolic 32 dBi 4900–5875 MHz

3.4 Product description and theory of operation

The EUT is a 2x2 MIMO point-to-multipoint (PMP) and point-to-point (PTP) carrier grade broadband wireless infrastructure product, designed to operate in the 4940–4990 MHz band.

3.5 EUT exercise details

The EUT was controlled to transmit at desired frequency and modulation from laptop using web interface at IP address: 192.168.25.2

3.6 EUT setup diagram

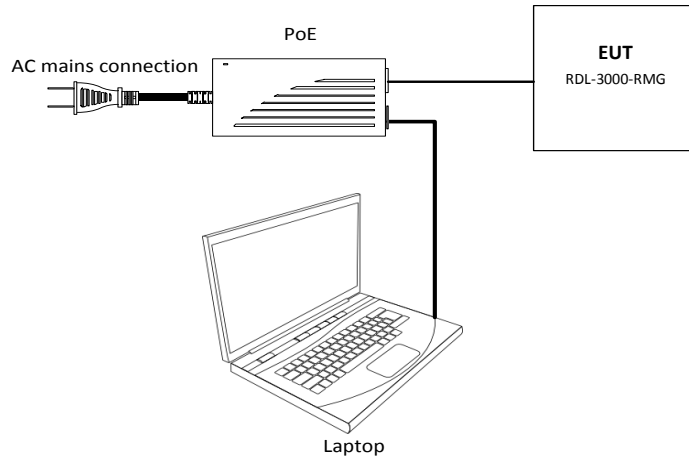


Figure 3.6-1: Setup diagram

3.7 EUT sub assemblies

Table 3.7-1: EUT sub assemblies

Description	Brand name	Model/Part number	Serial number
PoE	Cincon Electronics Co.	TRG60A-POE-L	1127

Section 4. Engineering considerations

4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

4.2 Technical judgment

None

4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 5. Test conditions

5.1 Atmospheric conditions

Temperature	15–30 °C
Relative humidity	20–75 %
Air pressure	860–1060 mbar

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 6. Measurement uncertainty

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of $K = 2$ with 95% certainty.

Test name	Measurement uncertainty, dB
All antenna port measurements	0.55
Conducted spurious emissions	1.13
Radiated spurious emissions	3.78
AC power line conducted emissions	3.55

Section 7. Test equipment

7.1 Test equipment list

Table 7.1-1: Equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
3 m EMI test chamber	TDK	SAC-3	FA002047	1 year	Dec. 1/17
Flush mount turntable	Sunol	FM2022	FA002082	—	NCR
Controller	Sunol	SC104V	FA002060	—	NCR
Antenna mast	Sunol	TLT2	FA002061	—	NCR
AC Power source	Chenwa	2700M-10k	FA002716	—	VOU
Receiver/spectrum analyzer	Rohde & Schwarz	ESU 26	FA002043	1 year	Jan. 31/18
Spectrum analyzer	Rohde & Schwarz	FSU	FA001877	1 year	Jul. 18/18
Horn with Preamp (1–18 GHz)	ETS-Lindgren	3117-PA	FA002840	1 year	Nov. 11/17
Bilog antenna (20–3000 MHz)	Sunol	JB3	FA002108	1 year	June 27/18
Horn antenna (18–40 GHz)	EMCO	3116	FA001847	1 year	June 27/18
Pre-amplifier (18–26 GHz)	Narda	BBS-1826N612	FA001550	—	VOU
Pre-amplifier (26–40 GHz)	Narda	DBL-2640N610	FA001556	—	VOU
LISN	Rohde & Schwarz	ENV216	FA002023	1 year	May 19/18
Temperature chamber	Thermotron	SM-16C	FA001030	1 year	NCR

Note: NCR - no calibration required, VOU - verify on use

Section 8. Testing data

8.1 RSS-Gen 8.8 AC power line conducted emissions limits

8.1.1 Definitions and limits

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz, shall not exceed the limits in table below.

Unless the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in table below. The more stringent limit applies at the frequency range boundaries.

Table 8.1-1: Conducted emissions limit

Frequency of emission, MHz	Conducted limit, dB μ V	
	Quasi-peak	Average**
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

Note: * - The level decreases linearly with the logarithm of the frequency.

** - A linear average detector is required.

8.1.2 Test summary

Test date	September 26, 2017	Temperature	23 °C
Test engineer	Andrey Adelberg	Air pressure	1010 mbar
Verdict	Pass	Relative humidity	36 %

8.1.3 Observations, settings and special notes

The EUT was set up as tabletop configuration.

The spectral scan has been corrected with transducer factors (i.e. cable loss, LISN factors, and attenuators) for determination of compliance.

A preview measurement was generated with the receiver in continuous scan mode. Emissions detected within 6 dB or above limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement.


Receiver settings for preview measurements:

Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Detector mode	Peak and Average
Trace mode	Max Hold
Measurement time	1000 ms

Receiver settings for final measurements:

Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Detector mode	Quasi-Peak and Average
Trace mode	Max Hold
Measurement time	1000 ms

8.1.4 Test data

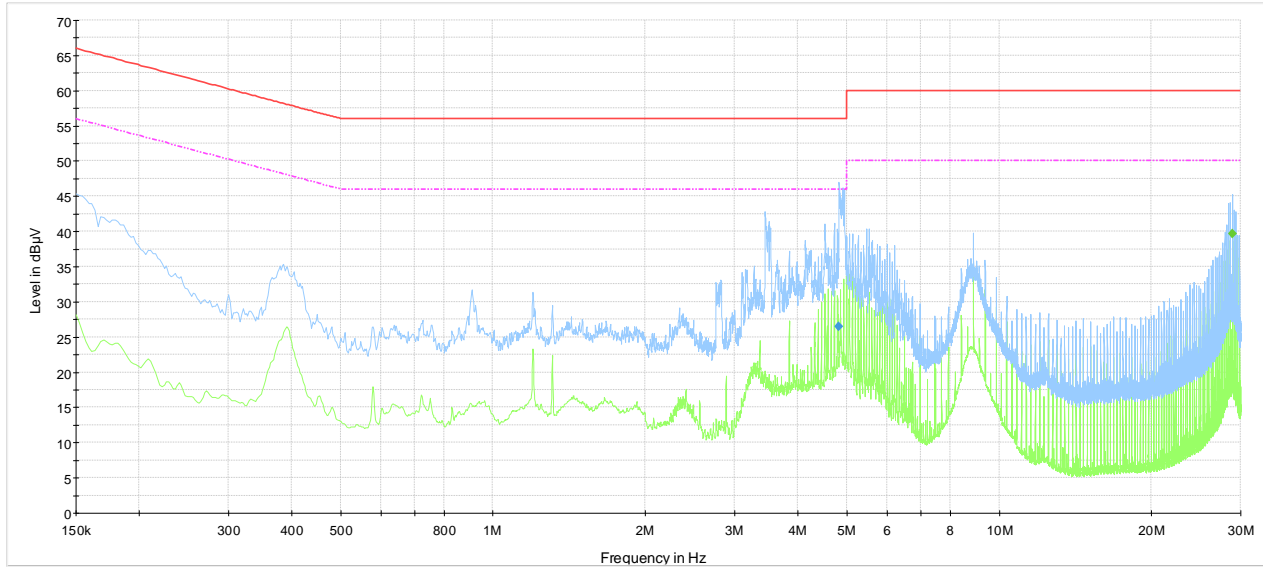

Conducted emissions on AC mains, phase line

- Preview Result 2-AVG
- Preview Result 1-PK+
- CISPR 22 Mains Q-Peak Class B Limit
- CISPR 22 Mains Average Class B Limit
- ◆ Final_Result QPK
- ◆ Final_Result CAV


Plot 8.1-1: Conducted emissions on phase line

Table 8.1-2: Quasi-Peak conducted emissions results on phase line

Frequency, MHz	Q-Peak result, dBµV	Limit, dBµV	Margin, dB	Meas. Time, ms	Bandwidth, kHz	Filter	Correction, dB
4.827750	26.53	56.00	29.47	100	9	ON	9.5

Table 8.1-3: Average conducted emissions results on phase line

Frequency, MHz	Average result, dBµV	Limit, dBµV	Margin, dB	Meas. Time, ms	Bandwidth, kHz	Filter	Correction, dB
28.864000	39.65	50.00	10.35	100	9	ON	10.1

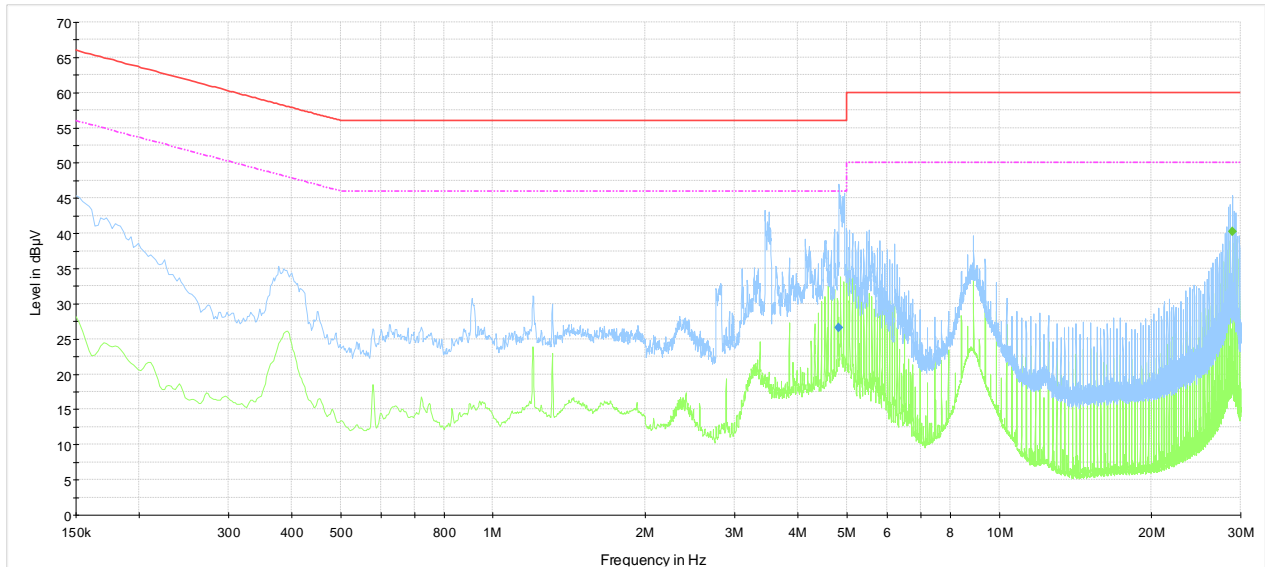

Conducted emissions on AC mains, neutral line
 Preview Result 2-AVG
 Preview Result 1-PK+
 CISPR 22 Mains O-Peak Class B Limit
 CISPR 22 Mains Average Class B Limit
 Final_Result QPK
 Final_Result CAV

Plot 8.1-2: Conducted emissions on neutral line

Table 8.1-4: Quasi-Peak conducted emissions results on neutral line

Frequency, MHz	Q-Peak result, dBµV	Limit, dBµV	Margin, dB	Meas. Time, ms	Bandwidth, kHz	Filter	Correction, dB
4.827750	26.65	56.00	29.35	100	9	ON	9.5

Table 8.1-5: Average conducted emissions results on neutral line

Frequency, MHz	Average result, dBµV	Limit, dBµV	Margin, dB	Meas. Time, ms	Bandwidth, kHz	Filter	Correction, dB
28.864000	40.23	50.00	9.77	100	9	ON	10.2

8.2 FCC 90.1215(d) and RSS-Gen 6.6 Occupied bandwidth

8.2.1 Definitions and limits

FCC

d) The peak power spectral density is measured as conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements are made over a bandwidth of one MHz or the 26 dB emission bandwidth of the device, whichever is less. A resolution bandwidth less than the measurement bandwidth can be used, provided that the measured power is integrated to show total power over the measurement bandwidth. If the resolution bandwidth is approximately equal to the measurement bandwidth, and much less than the emission bandwidth of the equipment under test, the measured results shall be corrected to account for any difference between the resolution bandwidth of the test instrument and its actual noise bandwidth.

ISED:

The emission bandwidth (\times dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated \times dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least $3\times$ the resolution bandwidth.

When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

The trace data points are recovered and are directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded.

The difference between the two recorded frequencies is the 99% occupied bandwidth.

8.2.2 Test summary

Test date:	September 26, 2017	Temperature:	23 °C
Test engineer:	Andrey Adelberg	Air pressure:	1006 mbar
Verdict:	Pass	Relative humidity:	34 %

8.2.3 Observations, settings and special notes

Spectrum analyser settings:

Resolution bandwidth:	100 kHz for 5 MHz channel 200 kHz for 10 MHz channel 500 kHz for 20 MHz channel
Video bandwidth:	$\geq 3 \times$ RBW
Frequency span:	10 MHz for 5 MHz channel 20 MHz for 10 MHz channel 50 MHz for 20 MHz channel
Detector mode:	Peak
Trace mode:	Max Hold

8.2.4 Test data

Table 8.2-1: Channel names description

Channel name	5-MHz channel, MHz	10-MHz channel, MHz	20-MHz channel, MHz
Low	4942.5	4945.0	4950.0
Mid	4965.0	4965.0	4965.0
High	4987.5	4985.0	4980.0

Table 8.2-2: 26 dB bandwidth results for Ant 1

Channel	5-MHz channel, MHz	10-MHz channel, MHz	20-MHz channel, MHz
Low	4.82	9.49	19.63
Mid	4.82	9.68	19.55
High	4.79	9.49	19.55

Table 8.2-3: 26 dB bandwidth results for Ant 2


Channel	5-MHz channel, MHz	10-MHz channel, MHz	20-MHz channel, MHz
Low	4.81	9.68	19.23
Mid	4.81	9.55	19.39
High	4.79	9.62	19.39

Table 8.2-4: 99% bandwidth results for Ant 1

Channel	5-MHz channel, MHz	10-MHz channel, MHz	20-MHz channel, MHz
Low	4.15	8.27	16.75
Mid	4.13	8.30	16.67
High	4.15	8.30	16.67


Table 8.2-5: 99% bandwidth results for Ant 2

Channel	5-MHz channel, MHz	10-MHz channel, MHz	20-MHz channel, MHz
Low	4.15	8.30	16.75
Mid	4.15	8.30	16.75
High	4.13	8.27	16.67

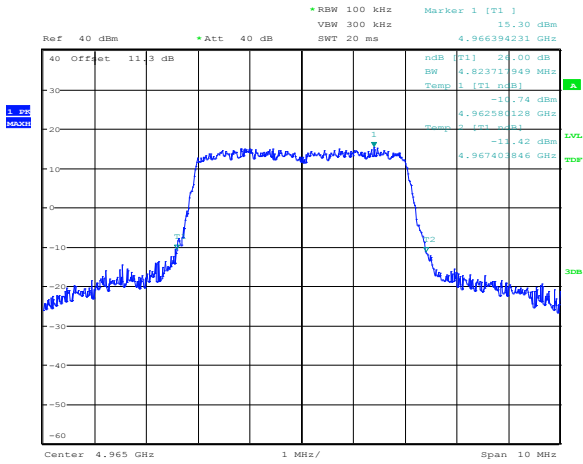


Date: 26.SEP.2017 16:38:29

Figure 8.2-1: 26 dB bandwidth for 5 MHz channel, sample plot

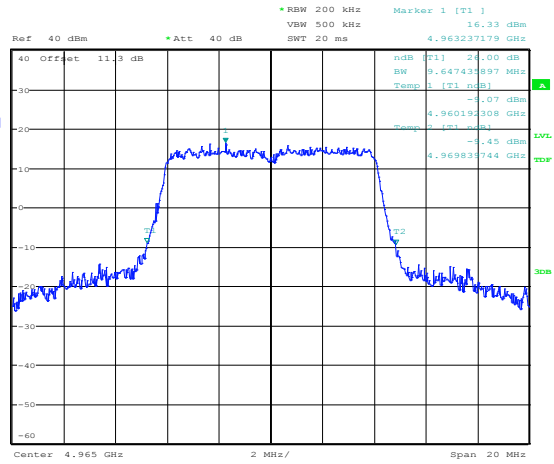


Date: 26.SEP.2017 16:30:02

Figure 8.2-2: 26 dB bandwidth for 10 MHz channel, sample plot

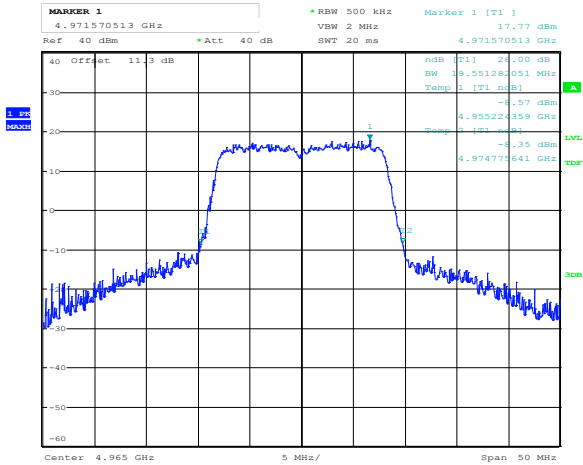

Date: 26.SEP.2017 16:29:02

Figure 8.2-3: 26 dB bandwidth for 20 MHz channel, sample plot

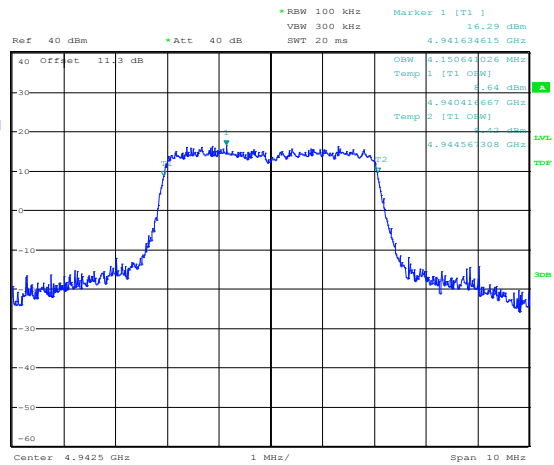


Date: 26.SEP.2017 16:36:39

Figure 8.2-4: 99% occupied bandwidth for 5 MHz channel, sample plot


Section 8
Test name
Specification

Testing data
 FCC 90.1215(d) and RSS-Gen Clause 6.6 Occupied bandwidth
 FCC Part 90, Subpart Y and RSS-Gen, Issue 4

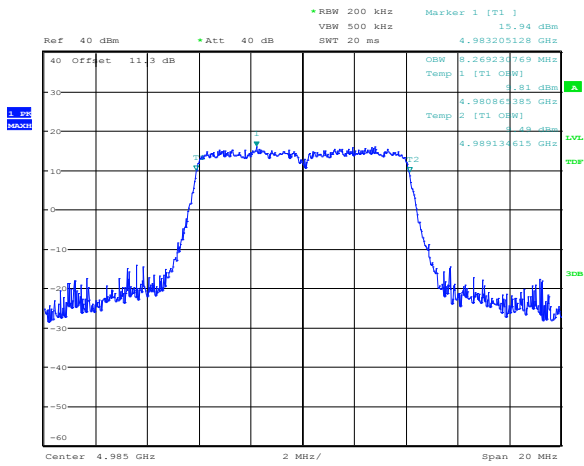

Date: 26.SEP.2017 16:35:07

Figure 8.2-5: 99 % occupied bandwidth for 10 MHz channel, sample plot

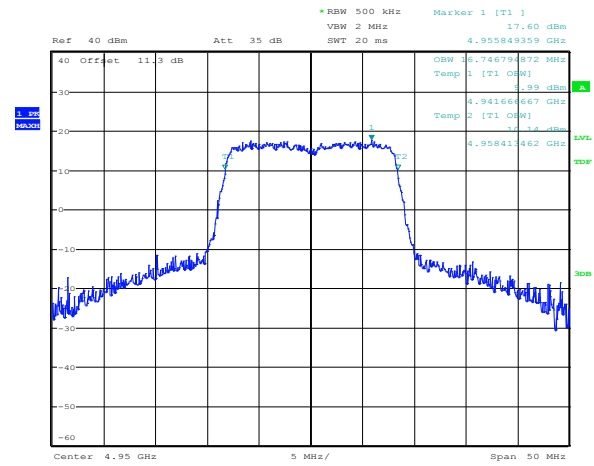

Date: 26.SEP.2017 16:23:16

Figure 8.2-6: 99 % occupied bandwidth for 20 MHz channel, sample plot

8.3 FCC 90.213(a) and RSS-111 Clause 5.2 Transmitter frequency stability

8.3.1 Definitions and limits

FCC:

(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table:

Table 8.3-1: Minimum frequency stability

Frequency range (MHz)	Fixed and base stations (\pm ppm)	Mobile stations (\pm ppm)	
		Over 2 watts output power	2 watts or less output power
Below 25	100	100	200
25–50	20	20	50
72–76	5		50
150–174	5	5	50
216–220	1.0		1.0
220–222	0.1	1.5	1.5
421–512	2.5	5	5
806–809	1.0	1.5	1.5
809–824	1.5	2.5	2.5
851–854	1.0	1.5	1.5
854–869	1.5	2.5	2.5
896–901	0.1	1.5	1.5
902–928	2.5	2.5	2.5
929–930	1.5		
935–940	0.1	1.5	1.5
1427–1435	300	300	300
Above 2450			

ISED:

The applicant shall ensure frequency stability by showing that the occupied bandwidth is maintained within the band of operation when tested at the temperature and supply voltage variations specified for the frequency stability measurement in RSS-Gen.

8.3.2 Test summary

Test date:	September 27, 2017	Temperature:	22 °C
Test engineer:	Andrey Adelberg	Air pressure:	1010 mbar
Verdict:	Pass	Relative humidity:	32 %

8.3.3 Observations, settings and special notes

Spectrum analyser settings:

Resolution bandwidth:	30 Hz
Video bandwidth:	100 Hz
Detector mode:	Peak

8.3.4 Test data

Table 8.3-2: Frequency drift measurement

Temperature, °C	Voltage	Nominal frequency, GHz	Frequency measured, GHz	Offset, kHz
50	Nominal	4.965000000	4.965097474	97.474
40	Nominal	4.965000000	4.965100112	100.112
30	Nominal	4.965000000	4.965104609	104.609
20	Nominal +15 %	4.965000000	4.965109933	109.932
20	Nominal	4.965000000	4.965115256	115.256
20	Nominal -15 %	4.965000000	4.965119636	119.636
10	Nominal	4.965000000	4.965124016	124.016
0	Nominal	4.965000000	4.965133266	133.266
-10	Nominal	4.965000000	4.965137144	137.144
-20	Nominal	4.965000000	4.965134696	134.696
-30	Nominal	4.965000000	4.965128968	128.968

8.4 FCC 90.1215(a) and RSS-111 Clause 5.3 Transmit output power and PSD

8.4.1 Definitions and limits

FCC:

(a) The transmitting power of stations operating in the 4940–4990 MHz band must not exceed the maximum limits given in Table 8.4-1 below

High power devices are also limited to a peak power spectral density of 21 dBm per one MHz. High power devices using channel bandwidths other than those listed above are permitted; however, they are limited to peak power spectral density of 21 dBm/MHz. If transmitting antennas of directional gain greater than 9 dBi are used, both the maximum conducted output power and the peak power spectral density should be reduced by the amount in decibels that the directional gain of the antenna exceeds 9 dBi. However, high power point-to-point and point-to-multipoint operations (both fixed and temporary-fixed rapid deployment) may employ transmitting antennas with directional gain up to 26 dBi without any corresponding reduction in the maximum conducted output power or spectral density. Corresponding reduction in the maximum conducted output power and peak power spectral density should be the amount in decibels that the directional gain of the antenna exceeds 26 dBi.

(b) Low power devices are also limited to a peak power spectral density of 8 dBm per one MHz. Low power devices using channel bandwidths other than those listed above are permitted; however, they are limited to a peak power spectral density of 8 dBm/MHz. If transmitting antennas of directional gain greater than 9 dBi are used, both the maximum conducted output power and the peak power spectral density should be reduced by the amount in decibels that the directional gain of the antenna exceeds 9 dBi.

ISED:

Equipment is classified as either a low-power or high-power device according to its maximum transmitted power and its channel bandwidth as described in the section below. The equipment’s occupied bandwidth shall not exceed its channel bandwidth. The transmitted power of low-power and high-power devices shall not exceed the maximum limits corresponding to the equipment type given in Table 8.4-1 below.

Table 8.4-1: Channel bandwidth and power limits

Channel bandwidth, MHz	Output power (P) for low-power device, dBm	Output power (P) for high-power device, dBm
1	$P \leq 7$	$7 < P \leq 20$
5	$P \leq 14$	$14 < P \leq 27$
10	$P \leq 17$	$17 < P \leq 30$
15	$P \leq 18.8$	$18.8 < P \leq 31.8$
20	$P \leq 20$	$20 < P \leq 33$

High- and low-power devices are also limited to a maximum power spectral density of 21 dBm/MHz and 8 dBm/MHz respectively. Devices using channel bandwidths other than those listed in Table 1 are permitted; however, the channel bandwidth shall not exceed 20 MHz and the devices shall comply with the maximum power spectral density limits of 21 dBm/MHz for high-power transmitters and 8 dBm/MHz for low-power transmitters.

5.3.1 Equipment with multiple transmitters

For equipment with an antenna system that works with multiple transmitters, with different information transmitted by each transmitter to each receiver, the total power of the device shall be calculated as the sum of the powers from all the transmitters and it shall not be higher than the power limit specified in Table 1 for high-power devices according to the equipment’s channel bandwidth.

8.4.2 Test summary

Test date:	September 26, 2017	Temperature:	22 °C
Test engineer:	Andrey Adelberg	Air pressure:	1010 mbar
Verdict:	Pass	Relative humidity:	31 %

8.4.3 Observations settings and special notes

EUT is considered High power device. The transmit power was measured using RMS power meter

The transmitter power spectral density (PSD) was measured over a bandwidth of 1 MHz, with the power measured as per above. A resolution bandwidth less than the measurement bandwidth can be used provided that the measured power is integrated to show total power over the measurement bandwidth. Spectrum analyser settings:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Peak
Trace mode:	Max Hold

8.4.4 Test data

Table 8.4-2: Output power and EIRP measurements results for 5 MHz channel, 10 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 power (dBm)	Antenna 2 power (dBm)	Combined power (dBm)	Output power limit (dBm)	Output power margin (dB)	Antenna gain (dBi)	EIRP (dBm)	EIRP limit (dBm)	EIRP margin (dB)
BPSK 1.6 Mbps	4942.5	20.87	20.00	23.47	27.00	3.53	10.00	33.47	53.00	19.53
	4965.0	20.52	20.36	23.45	27.00	3.55	10.00	33.45	53.00	19.55
	4987.5	20.70	20.63	23.68	27.00	3.32	10.00	33.68	53.00	19.32
256-QAM 46.6 Mbps	4942.5	20.82	20.12	23.49	27.00	3.51	10.00	33.49	53.00	19.51
	4965.0	20.55	20.48	23.53	27.00	3.47	10.00	33.53	53.00	19.47
	4987.5	20.71	20.64	23.69	27.00	3.31	10.00	33.69	53.00	19.31

Table 8.4-3: Output power and EIRP measurements results for 5 MHz channel, 19 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 power (dBm)	Antenna 2 power (dBm)	Combined power (dBm)	Output power limit (dBm)	Output power margin (dB)	Antenna gain (dBi)	EIRP (dBm)	EIRP limit (dBm)	EIRP margin (dB)
BPSK 1.6 Mbps	4942.5	20.87	20.00	23.47	27.00	3.53	19.00	42.47	53.00	10.53
	4965.0	20.52	20.36	23.45	27.00	3.55	19.00	42.45	53.00	10.55
	4987.5	20.70	20.63	23.68	27.00	3.32	19.00	42.68	53.00	10.32
256-QAM 46.6 Mbps	4942.5	20.82	20.12	23.49	27.00	3.51	19.00	42.49	53.00	10.51
	4965.0	20.55	20.48	23.53	27.00	3.47	19.00	42.53	53.00	10.47
	4987.5	20.71	20.64	23.69	27.00	3.31	19.00	42.69	53.00	10.31

Table 8.4-4: Output power and EIRP measurements results for 5 MHz channel, 24 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 power (dBm)	Antenna 2 power (dBm)	Combined power (dBm)	Output power limit (dBm)	Output power margin (dB)	Antenna gain (dBi)	EIRP (dBm)	EIRP limit (dBm)	EIRP margin (dB)
BPSK 1.6 Mbps	4942.5	20.87	20.00	23.47	27.00	3.53	24.00	47.47	53.00	5.53
	4965.0	20.52	20.36	23.45	27.00	3.55	24.00	47.45	53.00	5.55
	4987.5	20.70	20.63	23.68	27.00	3.32	24.00	47.68	53.00	5.32
256-QAM 46.6 Mbps	4942.5	20.82	20.12	23.49	27.00	3.51	24.00	47.49	53.00	5.51
	4965.0	20.55	20.48	23.53	27.00	3.47	24.00	47.53	53.00	5.47
	4987.5	20.71	20.64	23.69	27.00	3.31	24.00	47.69	53.00	5.31



Table 8.4-5: Output power and EIRP measurements results for 5 MHz channel, 32 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 power (dBm)	Antenna 2 power (dBm)	Combined power (dBm)	Output power limit (dBm)	Output power margin (dB)	Antenna gain (dBi)	EIRP (dBm)	EIRP limit (dBm)	EIRP margin (dB)
BPSK 1.6 Mbps	4942.5	17.98	17.20	20.62	21.00	0.38	32.00	52.62	53.00	0.38
	4965.0	17.52	17.62	20.58	21.00	0.42	32.00	52.58	53.00	0.42
	4987.5	18.50	17.37	20.98	21.00	0.02	32.00	52.98	53.00	0.02
256-QAM 46.6 Mbps	4942.5	18.00	17.30	20.67	21.00	0.33	32.00	52.67	53.00	0.33
	4965.0	17.54	17.68	20.62	21.00	0.38	32.00	52.62	53.00	0.38
	4987.5	18.52	17.33	20.98	21.00	0.02	32.00	52.98	53.00	0.02

Note: Output power limit was calculated as follows: 27 dBm – (32 dBi – 26 dBi) = 21 dBm

Table 8.4-6: Output power and EIRP measurements results for 10 MHz channel, 10 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 power (dBm)	Antenna 2 power (dBm)	Combined power (dBm)	Output power limit (dBm)	Output power margin (dB)	Antenna gain (dBi)	EIRP (dBm)	EIRP limit (dBm)	EIRP margin (dB)
BPSK 3.3 Mbps	4945.0	22.59	22.77	25.69	30.00	4.31	10.00	35.69	56.00	20.31
	4965.0	22.22	22.20	25.22	30.00	4.78	10.00	35.22	56.00	20.78
	4985.0	22.16	22.24	25.21	30.00	4.79	10.00	35.21	56.00	20.79
256-QAM 93.3 Mbps	4945.0	22.62	22.64	25.64	30.00	4.36	10.00	35.64	56.00	20.36
	4965.0	22.31	22.11	25.22	30.00	4.78	10.00	35.22	56.00	20.78
	4985.0	22.18	22.25	25.23	30.00	4.77	10.00	35.23	56.00	20.77

Table 8.4-7: Output power and EIRP measurements results for 10 MHz channel, 19 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 power (dBm)	Antenna 2 power (dBm)	Combined power (dBm)	Output power limit (dBm)	Output power margin (dB)	Antenna gain (dBi)	EIRP (dBm)	EIRP limit (dBm)	EIRP margin (dB)
BPSK 3.3 Mbps	4945.0	22.59	22.77	25.69	30.00	4.31	19.00	44.69	56.00	11.31
	4965.0	22.22	22.20	25.22	30.00	4.78	19.00	44.22	56.00	11.78
	4985.0	22.16	22.24	25.21	30.00	4.79	19.00	44.21	56.00	11.79
256-QAM 93.3 Mbps	4945.0	22.62	22.64	25.64	30.00	4.36	19.00	44.64	56.00	11.36
	4965.0	22.31	22.11	25.22	30.00	4.78	19.00	44.22	56.00	11.78
	4985.0	22.18	22.25	25.23	30.00	4.77	19.00	44.23	56.00	11.77

Table 8.4-8: Output power and EIRP measurements results for 10 MHz channel, 24 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 power (dBm)	Antenna 2 power (dBm)	Combined power (dBm)	Output power limit (dBm)	Output power margin (dB)	Antenna gain (dBi)	EIRP (dBm)	EIRP limit (dBm)	EIRP margin (dB)
BPSK 3.3 Mbps	4945.0	22.59	22.77	25.69	30.00	4.31	24.00	49.69	56.00	6.31
	4965.0	22.22	22.20	25.22	30.00	4.78	24.00	49.22	56.00	6.78
	4985.0	22.16	22.24	25.21	30.00	4.79	24.00	49.21	56.00	6.79
256-QAM 93.3 Mbps	4945.0	22.62	22.64	25.64	30.00	4.36	24.00	49.64	56.00	6.36
	4965.0	22.31	22.11	25.22	30.00	4.78	24.00	49.22	56.00	6.78
	4985.0	22.18	22.25	25.23	30.00	4.77	24.00	49.23	56.00	6.77



Table 8.4-9: Output power and EIRP measurements results for 10 MHz channel, 32 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 power (dBm)	Antenna 2 power (dBm)	Combined power (dBm)	Output power limit (dBm)	Output power margin (dB)	Antenna gain (dBi)	EIRP (dBm)	EIRP limit (dBm)	EIRP margin (dB)
BPSK 3.3 Mbps	4945.0	20.63	19.85	23.27	24.00	0.73	32.00	55.27	56.00	0.73
	4965.0	20.44	20.48	23.47	24.00	0.53	32.00	55.47	56.00	0.53
	4985.0	20.46	20.77	23.63	24.00	0.37	32.00	55.63	56.00	0.37
256-QAM 93.3 Mbps	4945.0	20.59	19.85	23.25	24.00	0.75	32.00	55.25	56.00	0.75
	4965.0	20.51	20.51	23.52	24.00	0.48	32.00	55.52	56.00	0.48
	4985.0	20.38	20.71	23.56	24.00	0.44	32.00	55.56	56.00	0.44

Note: Output power limit was calculated as follows: 30 dBm – (32 dBi – 26 dBi) = 24 dBm

Table 8.4-10: Output power and EIRP measurements results for 20 MHz channel, 10 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 power (dBm)	Antenna 2 power (dBm)	Combined power (dBm)	Output power limit (dBm)	Output power margin (dB)	Antenna gain (dBi)	EIRP (dBm)	EIRP limit (dBm)	EIRP margin (dB)
BPSK 6.6 Mbps	4950.0	22.78	23.07	25.94	33.00	7.06	10.00	35.94	59.00	23.06
	4965.0	22.44	22.67	25.57	33.00	7.43	10.00	35.57	59.00	23.43
	4980.0	22.53	22.59	25.57	33.00	7.43	10.00	35.57	59.00	23.43
256-QAM 186.6 Mbps	4950.0	22.73	22.99	25.87	33.00	7.13	10.00	35.87	59.00	23.13
	4965.0	22.42	22.66	25.55	33.00	7.45	10.00	35.55	59.00	23.45
	4980.0	22.61	22.57	25.60	33.00	7.40	10.00	35.60	59.00	23.40

Table 8.4-11: Output power and EIRP measurements results for 20 MHz channel, 19 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 power (dBm)	Antenna 2 power (dBm)	Combined power (dBm)	Output power limit (dBm)	Output power margin (dB)	Antenna gain (dBi)	EIRP (dBm)	EIRP limit (dBm)	EIRP margin (dB)
BPSK 6.6 Mbps	4950.0	22.78	23.07	25.94	33.00	7.06	19.00	44.94	59.00	14.06
	4965.0	22.44	22.67	25.57	33.00	7.43	19.00	44.57	59.00	14.43
	4980.0	22.53	22.59	25.57	33.00	7.43	19.00	44.57	59.00	14.43
256-QAM 186.6 Mbps	4950.0	22.73	22.99	25.87	33.00	7.13	19.00	44.87	59.00	14.13
	4965.0	22.42	22.66	25.55	33.00	7.45	19.00	44.55	59.00	14.45
	4980.0	22.61	22.57	25.60	33.00	7.40	19.00	44.60	59.00	14.40

Table 8.4-12: Output power and EIRP measurements results for 20 MHz channel, 24 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 power (dBm)	Antenna 2 power (dBm)	Combined power (dBm)	Output power limit (dBm)	Output power margin (dB)	Antenna gain (dBi)	EIRP (dBm)	EIRP limit (dBm)	EIRP margin (dB)
BPSK 6.6 Mbps	4950.0	22.78	23.07	25.94	33.00	7.06	24.00	49.94	59.00	9.06
	4965.0	22.44	22.67	25.57	33.00	7.43	24.00	49.57	59.00	9.43
	4980.0	22.53	22.59	25.57	33.00	7.43	24.00	49.57	59.00	9.43
256-QAM 186.6 Mbps	4950.0	22.73	22.99	25.87	33.00	7.13	24.00	49.87	59.00	9.13
	4965.0	22.42	22.66	25.55	33.00	7.45	24.00	49.55	59.00	9.45
	4980.0	22.61	22.57	25.60	33.00	7.40	24.00	49.60	59.00	9.40



Table 8.4-13: Output power and EIRP measurements results for 20 MHz channel, 32 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 power (dBm)	Antenna 2 power (dBm)	Combined power (dBm)	Output power limit (dBm)	Output power margin (dB)	Antenna gain (dBi)	EIRP (dBm)	EIRP limit (dBm)	EIRP margin (dB)
BPSK 6.6 Mbps	4942.5	22.78	23.07	25.94	27.00	1.06	32.00	57.94	59.00	1.06
	4965.0	22.44	22.67	25.57	27.00	1.43	32.00	57.57	59.00	1.43
	4987.5	22.53	22.59	25.57	27.00	1.43	32.00	57.57	59.00	1.43
256-QAM 186.6 Mbps	4942.5	22.73	22.99	25.87	27.00	1.13	32.00	57.87	59.00	1.13
	4965.0	22.42	22.66	25.55	27.00	1.45	32.00	57.55	59.00	1.45
	4987.5	22.61	22.57	25.60	27.00	1.40	32.00	57.60	59.00	1.40

Note: Output power limit was calculated as follows: 33 dBm – (32 dBi – 26 dBi) = 27 dBm

Table 8.4-14: Power spectral density measurements results for 5 MHz channel, 10 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 PSD (dBm/MHz)	Antenna 2 PSD (dBm/MHz)	Combined PSD (dBm/MHz)	PSD limit (dBm/MHz)	PSD margin (dB)	Antenna gain (dBi)	EIRPSD (dBm/MHz)	EIRPSD limit (dBm/MHz)	EIRPSD margin (dB)
BPSK 1.6 Mbps	4942.5	14.95	14.11	17.56	21.00	3.44	10.00	27.56	47.00	19.44
	4965.0	14.63	14.52	17.59	21.00	3.41	10.00	27.59	47.00	19.41
	4987.5	14.86	14.60	17.74	21.00	3.26	10.00	27.74	47.00	19.26
256-QAM 46.6 Mbps	4942.5	14.92	14.18	17.58	21.00	3.42	10.00	27.58	47.00	19.42
	4965.0	14.59	14.58	17.60	21.00	3.40	10.00	27.60	47.00	19.40
	4987.5	14.88	14.55	17.73	21.00	3.27	10.00	27.73	47.00	19.27

Table 8.4-15: Power spectral density measurements results for 5 MHz channel, 19 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 PSD (dBm/MHz)	Antenna 2 PSD (dBm/MHz)	Combined PSD (dBm/MHz)	PSD limit (dBm/MHz)	PSD margin (dB)	Antenna gain (dBi)	EIRPSD (dBm/MHz)	EIRPSD limit (dBm/MHz)	EIRPSD margin (dB)
BPSK 1.6 Mbps	4942.5	14.95	14.11	17.56	21.00	3.44	19.00	36.56	47.00	10.44
	4965.0	14.63	14.52	17.59	21.00	3.41	19.00	36.59	47.00	10.41
	4987.5	14.86	14.60	17.74	21.00	3.26	19.00	36.74	47.00	10.26
256-QAM 46.6 Mbps	4942.5	14.92	14.18	17.58	21.00	3.42	19.00	36.58	47.00	10.42
	4965.0	14.59	14.58	17.60	21.00	3.40	19.00	36.60	47.00	10.40
	4987.5	14.88	14.55	17.73	21.00	3.27	19.00	36.73	47.00	10.27

Table 8.4-16: Power spectral density measurements results for 5 MHz channel, 24 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 PSD (dBm/MHz)	Antenna 2 PSD (dBm/MHz)	Combined PSD (dBm/MHz)	PSD limit (dBm/MHz)	PSD margin (dB)	Antenna gain (dBi)	EIRPSD (dBm/MHz)	EIRPSD limit (dBm/MHz)	EIRPSD margin (dB)
BPSK 1.6 Mbps	4942.5	14.95	14.11	17.56	21.00	3.44	24.00	41.56	47.00	5.44
	4965.0	14.63	14.52	17.59	21.00	3.41	24.00	41.59	47.00	5.41
	4987.5	14.86	14.60	17.74	21.00	3.26	24.00	41.74	47.00	5.26
256-QAM 46.6 Mbps	4942.5	14.92	14.18	17.58	21.00	3.42	24.00	41.58	47.00	5.42
	4965.0	14.59	14.58	17.60	21.00	3.40	24.00	41.60	47.00	5.40
	4987.5	14.88	14.55	17.73	21.00	3.27	24.00	41.73	47.00	5.27

Table 8.4-17: Power spectral density measurements results for 5 MHz channel, 32 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 PSD (dBm/MHz)	Antenna 2 PSD (dBm/MHz)	Combined PSD (dBm/MHz)	PSD limit (dBm/MHz)	PSD margin (dB)	Antenna gain (dBi)	EIRPSD (dBm/MHz)	EIRPSD limit (dBm/MHz)	EIRPSD margin (dB)
BPSK 1.6 Mbps	4942.5	12.01	11.20	14.63	15.00	0.37	32.00	46.63	47.00	0.37
	4965.0	11.63	11.77	14.71	15.00	0.29	32.00	46.71	47.00	0.29
	4987.5	12.35	11.39	14.91	15.00	0.09	32.00	46.91	47.00	0.09
256-QAM 46.6 Mbps	4942.5	12.10	11.18	14.67	15.00	0.33	32.00	46.67	47.00	0.33
	4965.0	11.64	11.63	14.65	15.00	0.35	32.00	46.65	47.00	0.35
	4987.5	12.42	11.41	14.95	15.00	0.05	32.00	46.95	47.00	0.05

Note: PSD limit was calculated as follows: 21 dBm/MHz – (32 dBi – 26 dBi) = 15 dBm/MHz

Table 8.4-18: Power spectral density measurements results for 10 MHz channel, 10 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 PSD (dBm/MHz)	Antenna 2 PSD (dBm/MHz)	Combined PSD (dBm/MHz)	PSD limit (dBm/MHz)	PSD margin (dB)	Antenna gain (dBi)	EIRPSD (dBm/MHz)	EIRPSD limit (dBm/MHz)	EIRPSD margin (dB)
BPSK 3.3 Mbps	4945.0	13.78	14.05	16.93	21.00	4.07	10.00	26.93	47.00	20.07
	4965.0	13.36	13.29	16.34	21.00	4.66	10.00	26.34	47.00	20.66
	4985.0	13.45	13.47	16.47	21.00	4.53	10.00	26.47	47.00	20.53
256-QAM 93.3 Mbps	4945.0	13.73	13.99	16.87	21.00	4.13	10.00	26.87	47.00	20.13
	4965.0	13.35	13.33	16.35	21.00	4.65	10.00	26.35	47.00	20.65
	4985.0	13.52	13.50	16.52	21.00	4.48	10.00	26.52	47.00	20.48

Table 8.4-19: Power spectral density measurements results for 10 MHz channel, 19 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 PSD (dBm/MHz)	Antenna 2 PSD (dBm/MHz)	Combined PSD (dBm/MHz)	PSD limit (dBm/MHz)	PSD margin (dB)	Antenna gain (dBi)	EIRPSD (dBm/MHz)	EIRPSD limit (dBm/MHz)	EIRPSD margin (dB)
BPSK 3.3 Mbps	4945.0	13.78	14.05	16.93	21.00	4.07	19.00	35.93	47.00	11.07
	4965.0	13.36	13.29	16.34	21.00	4.66	19.00	35.34	47.00	11.66
	4985.0	13.45	13.47	16.47	21.00	4.53	19.00	35.47	47.00	11.53
256-QAM 93.3 Mbps	4945.0	13.73	13.99	16.87	21.00	4.13	19.00	35.87	47.00	11.13
	4965.0	13.35	13.33	16.35	21.00	4.65	19.00	35.35	47.00	11.65
	4985.0	13.52	13.50	16.52	21.00	4.48	19.00	35.52	47.00	11.48

Table 8.4-20: Power spectral density measurements results for 10 MHz channel, 24 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 PSD (dBm/MHz)	Antenna 2 PSD (dBm/MHz)	Combined PSD (dBm/MHz)	PSD limit (dBm/MHz)	PSD margin (dB)	Antenna gain (dBi)	EIRPSD (dBm/MHz)	EIRPSD limit (dBm/MHz)	EIRPSD margin (dB)
BPSK 3.3 Mbps	4945.0	13.78	14.05	16.93	21.00	4.07	24.00	40.93	47.00	6.07
	4965.0	13.36	13.29	16.34	21.00	4.66	24.00	40.34	47.00	6.66
	4985.0	13.45	13.47	16.47	21.00	4.53	24.00	40.47	47.00	6.53
256-QAM 93.3 Mbps	4945.0	13.73	13.99	16.87	21.00	4.13	24.00	40.87	47.00	6.13
	4965.0	13.35	13.33	16.35	21.00	4.65	24.00	40.35	47.00	6.65
	4985.0	13.52	13.50	16.52	21.00	4.48	24.00	40.52	47.00	6.48



Table 8.4-21: Power spectral density measurements results for 10 MHz channel, 32 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 PSD (dBm/MHz)	Antenna 2 PSD (dBm/MHz)	Combined PSD (dBm/MHz)	PSD limit (dBm/MHz)	PSD margin (dB)	Antenna gain (dBi)	EIRPSD (dBm/MHz)	EIRPSD limit (dBm/MHz)	EIRPSD margin (dB)
BPSK 3.3 Mbps	4945.0	11.86	11.12	14.52	15.00	0.48	32.00	46.52	47.00	0.48
	4965.0	11.59	11.62	14.62	15.00	0.38	32.00	46.62	47.00	0.38
	4985.0	11.69	12.05	14.88	15.00	0.12	32.00	46.88	47.00	0.12
256-QAM 93.3 Mbps	4945.0	11.93	11.11	14.55	15.00	0.45	32.00	46.55	47.00	0.45
	4965.0	11.65	11.70	14.69	15.00	0.31	32.00	46.69	47.00	0.31
	4985.0	11.58	12.12	14.87	15.00	0.13	32.00	46.87	47.00	0.13

Note: PSD limit was calculated as follows: 21 dBm/MHz – (32 dBi – 26 dBi) = 15 dBm/MHz

Table 8.4-22: Power spectral density measurements results for 20 MHz channel, 10 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 PSD (dBm/MHz)	Antenna 2 PSD (dBm/MHz)	Combined PSD (dBm/MHz)	PSD limit (dBm/MHz)	PSD margin (dB)	Antenna gain (dBi)	EIRPSD (dBm/MHz)	EIRPSD limit (dBm/MHz)	EIRPSD margin (dB)
BPSK 6.6 Mbps	4950.0	10.92	11.35	14.15	21.00	6.85	10.00	24.15	47.00	22.85
	4965.0	10.76	10.98	13.88	21.00	7.12	10.00	23.88	47.00	23.12
	4980.0	10.91	10.93	13.93	21.00	7.07	10.00	23.93	47.00	23.07
256-QAM 186.6 Mbps	4950.0	11.02	11.22	14.13	21.00	6.87	10.00	24.13	47.00	22.87
	4965.0	10.76	11.01	13.90	21.00	7.10	10.00	23.90	47.00	23.10
	4980.0	10.88	10.87	13.89	21.00	7.11	10.00	23.89	47.00	23.11

Table 8.4-23: Power spectral density measurements results for 20 MHz channel, 19 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 PSD (dBm/MHz)	Antenna 2 PSD (dBm/MHz)	Combined PSD (dBm/MHz)	PSD limit (dBm/MHz)	PSD margin (dB)	Antenna gain (dBi)	EIRPSD (dBm/MHz)	EIRPSD limit (dBm/MHz)	EIRPSD margin (dB)
BPSK 6.6 Mbps	4950.0	10.92	11.35	14.15	21.00	6.85	19.00	33.15	47.00	13.85
	4965.0	10.76	10.98	13.88	21.00	7.12	19.00	32.88	47.00	14.12
	4980.0	10.91	10.93	13.93	21.00	7.07	19.00	32.93	47.00	14.07
256-QAM 186.6 Mbps	4950.0	11.02	11.22	14.13	21.00	6.87	19.00	33.13	47.00	13.87
	4965.0	10.76	11.01	13.90	21.00	7.10	19.00	32.90	47.00	14.10
	4980.0	10.88	10.87	13.89	21.00	7.11	19.00	32.89	47.00	14.11


Table 8.4-24: Power spectral density measurements results for 20 MHz channel, 24 dBi antenna

Modulation	Frequency (MHz)	Antenna 1 PSD (dBm/MHz)	Antenna 2 PSD (dBm/MHz)	Combined PSD (dBm/MHz)	PSD limit (dBm/MHz)	PSD margin (dB)	Antenna gain (dBi)	EIRPSD (dBm/MHz)	EIRPSD limit (dBm/MHz)	EIRPSD margin (dB)
BPSK 6.6 Mbps	4950.0	10.92	11.35	14.15	21.00	6.85	24.00	38.15	47.00	8.85
	4965.0	10.76	10.98	13.88	21.00	7.12	24.00	37.88	47.00	9.12
	4980.0	10.91	10.93	13.93	21.00	7.07	24.00	37.93	47.00	9.07
256-QAM 186.6 Mbps	4950.0	11.02	11.22	14.13	21.00	6.87	24.00	38.13	47.00	8.87
	4965.0	10.76	11.01	13.90	21.00	7.10	24.00	37.90	47.00	9.10
	4980.0	10.88	10.87	13.89	21.00	7.11	24.00	37.89	47.00	9.11

Table 8.4-25: Power spectral density measurements results for 20 MHz channel, 32 dBi antenna


Modulation	Frequency (MHz)	Antenna 1 PSD (dBm/MHz)	Antenna 2 PSD (dBm/MHz)	Combined PSD (dBm/MHz)	PSD limit (dBm/MHz)	PSD margin (dB)	Antenna gain (dBi)	EIRPSD (dBm/MHz)	EIRPSD limit (dBm/MHz)	EIRPSD margin (dB)
BPSK 6.6 Mbps	4950.0	10.92	11.35	14.15	15.00	0.85	32.00	46.15	47.00	0.85
	4965.0	10.76	10.98	13.88	15.00	1.12	32.00	45.88	47.00	1.12
	4980.0	10.91	10.93	13.93	15.00	1.07	32.00	45.93	47.00	1.07
256-QAM 186.6 Mbps	4950.0	11.02	11.22	14.13	15.00	0.87	32.00	46.13	47.00	0.87
	4965.0	10.76	11.01	13.90	15.00	1.10	32.00	45.90	47.00	1.10
	4980.0	10.88	10.87	13.89	15.00	1.11	32.00	45.89	47.00	1.11

Note: PSD limit was calculated as follows: 21 dBm/MHz – (32 dBi – 26 dBi) = 15 dBm/MHz

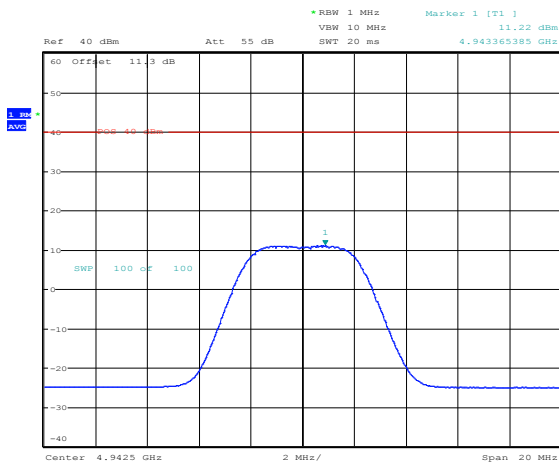


Date: 26.SEP.2017 11:44:57

Figure 8.4-1: PSD for 5 MHz channel, sample plot

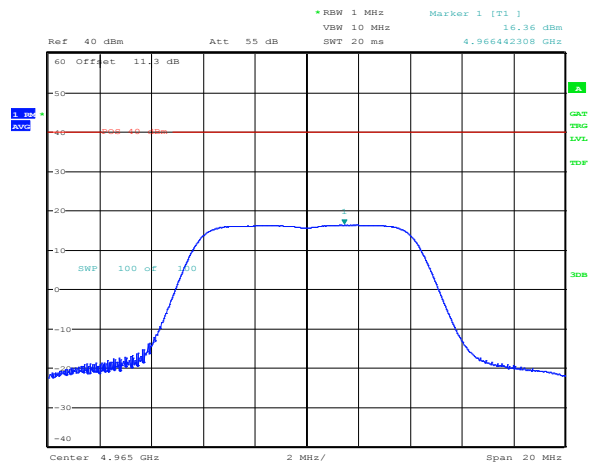

Date: 26.SEP.2017 11:51:46

Figure 8.4-2: 26 dB bandwidth for 10 MHz channel, sample plot

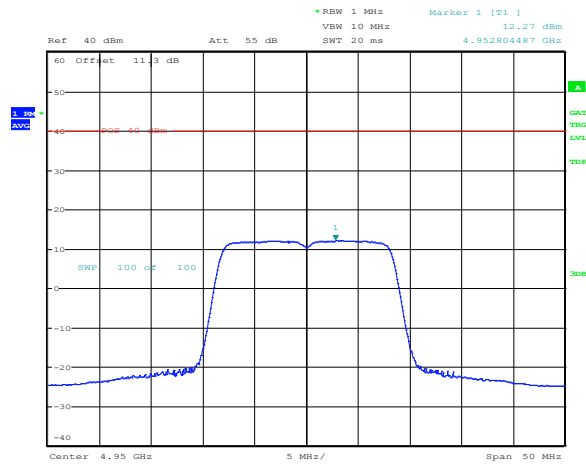

Date: 26.SEP.2017 16:17:59

Figure 8.4-3: PSD for 20 MHz channel, sample plot

8.5 FCC 90.1215(e) and RSS-111 Clause 5.4 Transmitter Peak to Average Power Ratio (PAPR)

8.5.1 Definitions and limits

FCC:
 The ratio of the peak excursion of the modulation envelope to the maximum conducted output power shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

ISED:
 The PAPR of the equipment shall not exceed 13 dB for more than 0.1% of the time, using a signal that corresponds to the highest PAPR during periods of continuous transmission.

8.5.2 Test summary

Test date:	November 14, 2016	Temperature:	22 °C
Test engineer:	Andrey Adelberg	Air pressure:	1010 mbar
Verdict:	Pass	Relative humidity:	31 %

8.5.3 Observations settings and special notes

Spectrum analyser settings:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Peak and RMS
Trace mode:	Max Hold

8.5.4 Test data

Table 8.5-1: PAPR measurements results for 5 MHz channel


Antenna port	Frequency, MHz	Ratio, dB	Limit, dB	Margin, dB
Antenna 1	4942.5	12.15	13.00	0.85
	4965.0	12.21	13.00	0.79
	4987.5	11.41	13.00	1.59
Antenna 2	4942.5	12.12	13.00	0.88
	4965.0	12.02	13.00	0.98
	4987.5	12.21	13.00	0.79

Table 8.5-2: PAPR measurements results for 10 MHz channel

Antenna port	Frequency, MHz	Ratio, dB	Limit, dB	Margin, dB
Antenna 1	4945.0	12.08	13.00	0.92
	4965.0	12.56	13.00	0.44
	4985.0	12.21	13.00	0.79
Antenna 2	4945.0	12.56	13.00	0.44
	4965.0	12.60	13.00	0.40
	4985.0	12.15	13.00	0.85


Table 8.5-3: PAPR measurements results for 20 MHz channel

Antenna port	Frequency, MHz	Ratio, dB	Limit, dB	Margin, dB
Antenna 1	4950.0	12.95	13.00	0.05
	4965.0	12.95	13.00	0.05
	4980.0	12.95	13.00	0.05
Antenna 2	4950.0	12.92	13.00	0.08
	4965.0	12.92	13.00	0.08
	4980.0	12.85	13.00	0.15

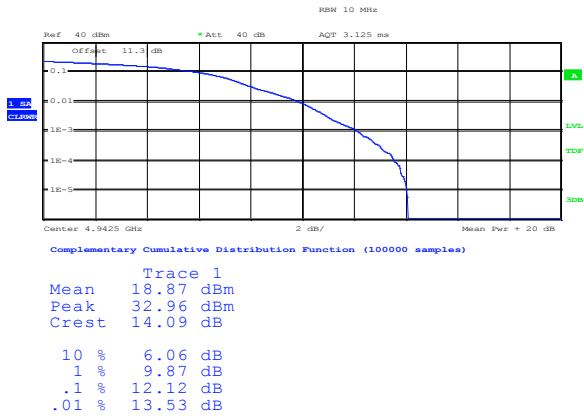


Date: 26.SEP.2017 16:55:32

Figure 8.5-1: PAPR of 0.1% for 5 MHz channel, sample plot

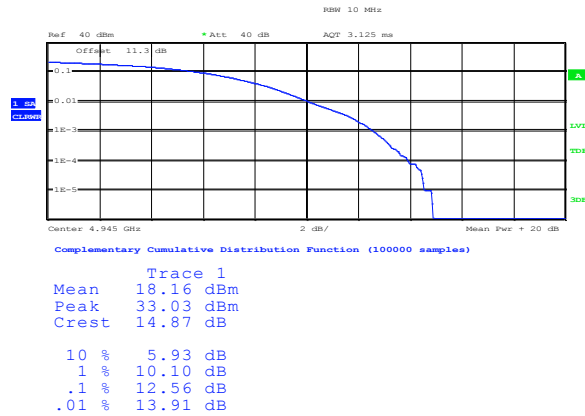

Date: 26.SEP.2017 16:56:16

Figure 8.5-2: PAPR of 0.1% for 10 MHz channel, sample plot

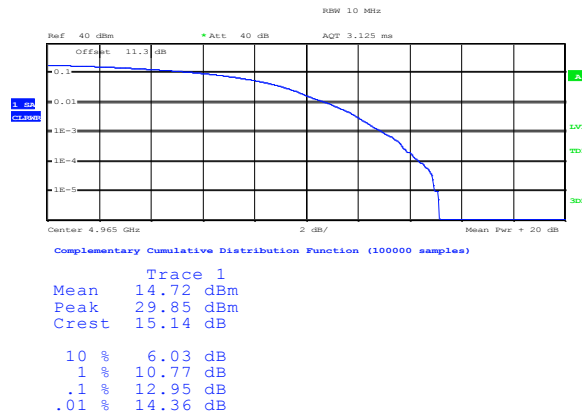

Date: 26.SEP.2017 17:01:42

Figure 8.5-3: PAPR of 0.1% for 20 MHz channel, sample plot

8.6 FCC 90.210(m) and RSS-111 Clause 5.5 Transmitter unwanted emissions

8.6.1 Definitions and limits

FCC:

Emission Mask M. For high power transmitters (greater than 20 dBm) operating in the 4940–4990 MHz frequency band, the power spectral density of the emissions must be attenuated below the output power of the transmitter as shown in the Table 8.6-1 *Minimum attenuation high-power transmitter*


ISED:

On any frequency f , offset from the channel centre frequency f_c by a separation f_d (expressed as a percentage of the channel bandwidth), the power spectral density of the unwanted emissions for low- and high-power transmitters shall comply with the limits specified in Table 8.6-1. Figure 8.5–1 shows the emission mask for low- and high-power transmitters. For equipment with multiple transmitters, the unwanted emissions of each transmitter shall comply with the emission limits based on the output power of the transmitter regardless of the total output power of the equipment (i.e. total output power from all the transmitters).

Table 8.6-1: Emission mask for low- and high-power transmitters

Offset Frequency f_d (% of the equipment's channel bandwidth)	Minimum attenuation low-power transmitter, dB	Minimum attenuation high-power transmitter, dB
$0 < f_d \leq 45$	0	0
$45 < f_d \leq 50$	$219 \times \log_{10}(f_d / 45)$	$568 \times \log_{10}(f_d / 45)$
$50 < f_d \leq 55$	$10 + 242 \times \log_{10}(f_d / 50)$	$26 + 145 \times \log_{10}(f_d / 50)$
$55 < f_d \leq 100$	$20 + 31 \times \log_{10}(f_d / 55)$	$32 + 31 \times \log_{10}(f_d / 55)$
$100 < f_d \leq 150$	$28 + 68 \times \log_{10}(f_d / 100)$	$40 + 57 \times \log_{10}(f_d / 100)$
$f_d > 150$	40	whichever is less stringent: 50 dBc or -25 dBm

Notes: * - Where: $f_d (\%) = ((f - f_c) / \text{channel bandwidth}) \times 100$

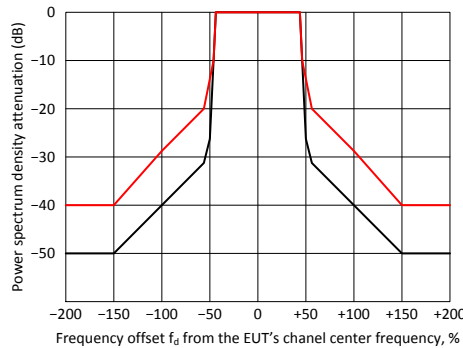

Note: Red line is for Low-power transmitter, Black line is for High-power transmitter

Figure 8.6-1: Unwanted emission mask for low- and high-power transmitters

8.6.2 Test summary

Test date:	September 27, 2017	Temperature:	22 °C
Test engineer:	Andrey Adelberg	Air pressure:	1010 mbar
Verdict:	Pass	Relative humidity:	31 %

8.6.3 Observations settings and special notes

The 0 dB reference level in the unwanted emission mask is the maximum in-band power spectral density measured in terms of average power in the equipment's channel bandwidth, using a resolution bandwidth of as close as possible to, without being less than 1 % of the occupied bandwidth, and a video bandwidth of 30 kHz. The unwanted power spectral density emissions are also measured using the same resolution and video bandwidths used in measuring the reference in-band power spectral density.

Radiated measurements were performed at a distance of 3 m, the EUT was transmitting on both MIMO chains simultaneously. Radiated emissions were performed while both antenna connectors were terminated with 50 Ω load. No spurious emissions were detected above test instrument's noise floor.

Spectrum analyser for peak conducted measurements within restricted bands below 1 GHz:

Resolution bandwidth:	50 kHz (for 5 MHz channel), 100 kHz (for 10 MHz channel), 200 kHz (for 20 MHz channel)
Video bandwidth:	30 kHz
Detector mode:	RMS
Trace mode:	Max Hold

8.6.4 Test data

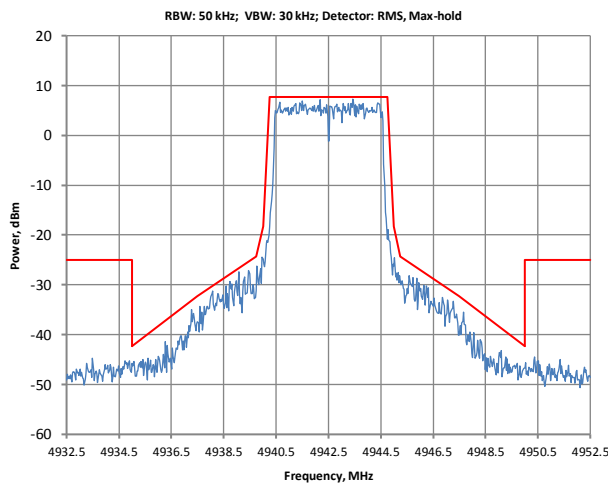


Figure 8.6-2: Emission mask at low channel, Ant1, 5 MHz channel

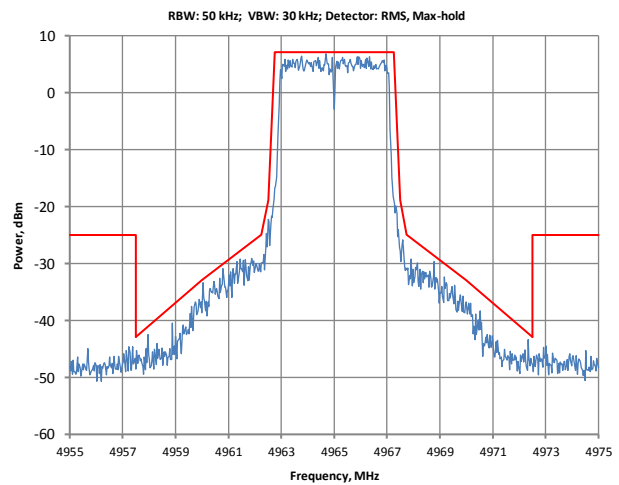


Figure 8.6-3: Emission mask at mid channel, Ant1, 5 MHz channel

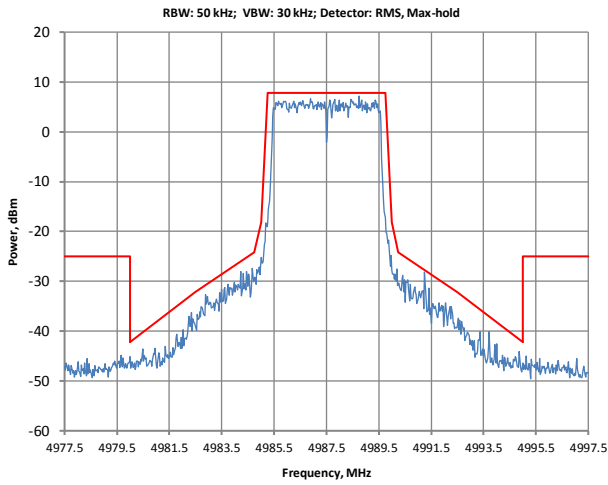


Figure 8.6-4: Emission mask at high channel, Ant1, 5 MHz channel

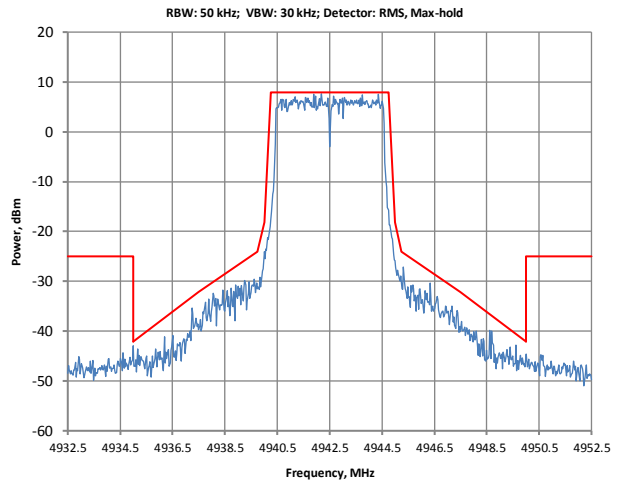


Figure 8.6-5: Emission mask at low channel, Ant2, 5 MHz channel

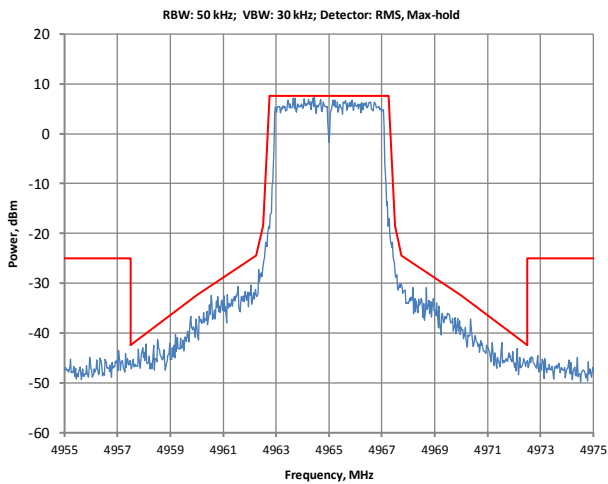


Figure 8.6-6: Emission mask at mid channel, Ant2, 5 MHz channel

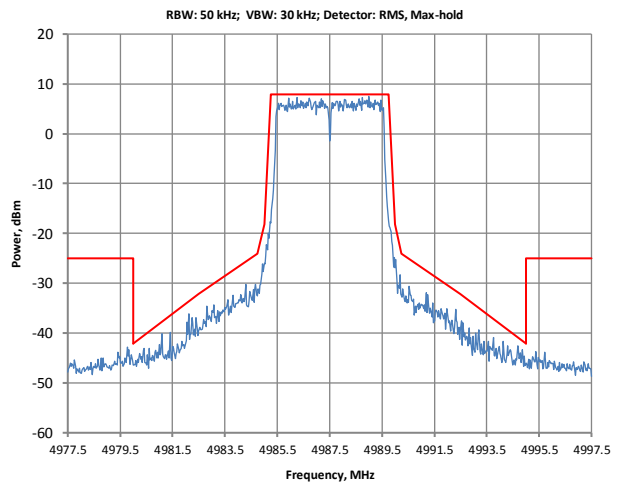


Figure 8.6-7: Emission mask at high channel, Ant2, 5 MHz channel

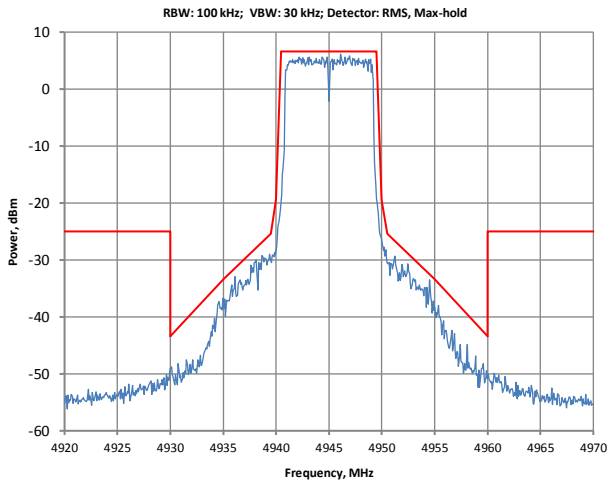


Figure 8.6-8: Emission mask at low channel, Ant1, 10 MHz channel

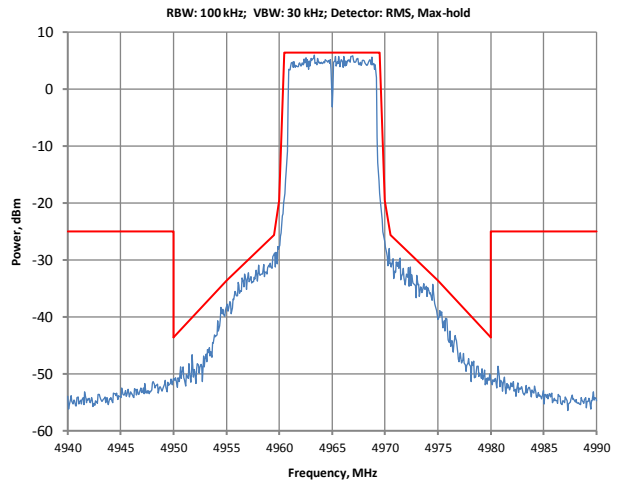


Figure 8.6-9: Emission mask at mid channel, Ant1, 10 MHz channel

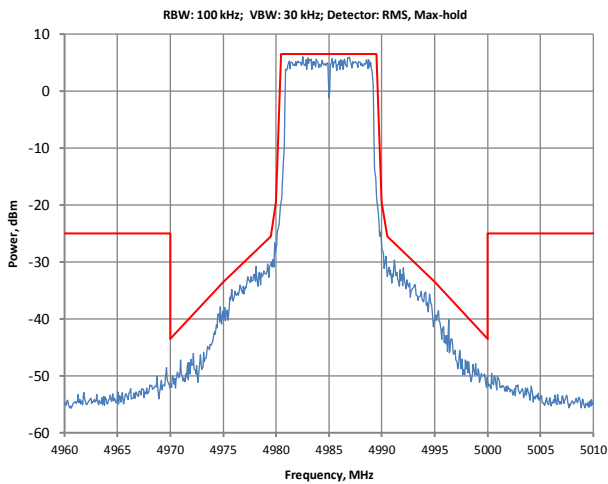


Figure 8.6-10: Emission mask at high channel, Ant1, 10 MHz channel

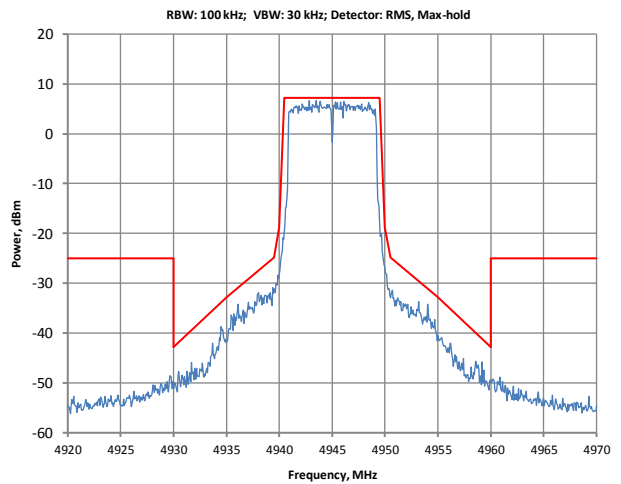


Figure 8.6-11: Emission mask at low channel, Ant2, 10 MHz channel

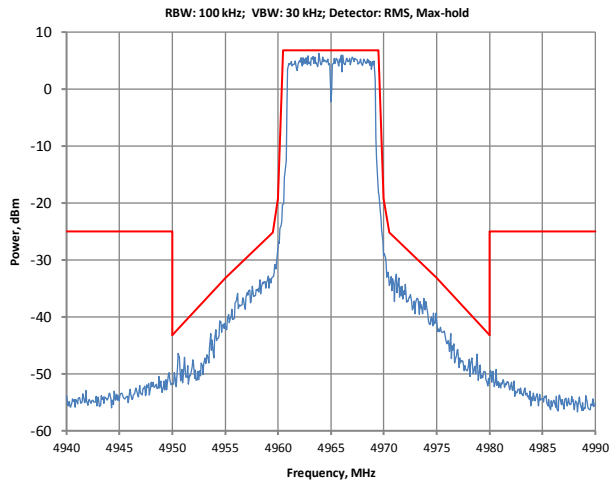


Figure 8.6-12: Emission mask at mid channel, Ant2, 10 MHz channel

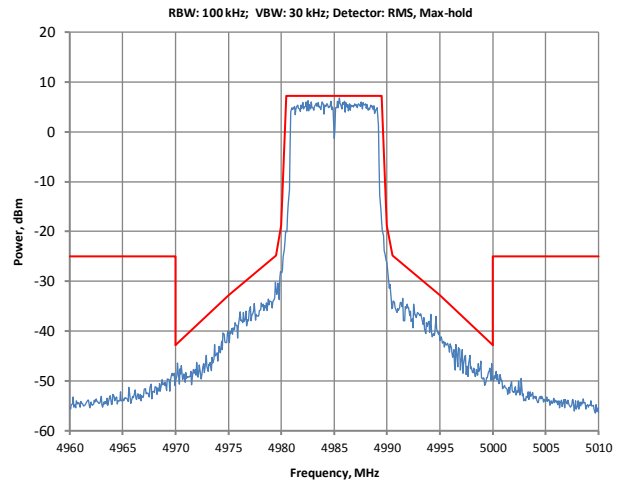


Figure 8.6-13: Emission mask at high channel, Ant2, 10 MHz channel

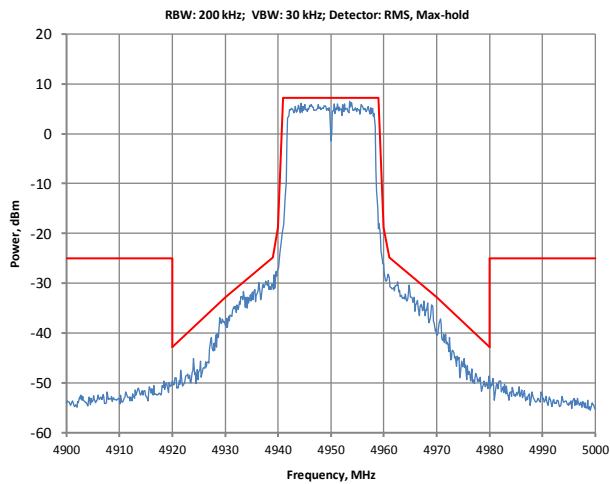


Figure 8.6-14: Emission mask at low channel, Ant1, 20 MHz channel

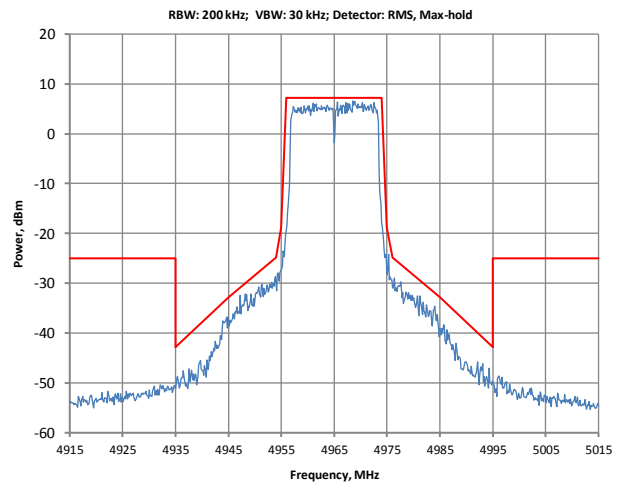


Figure 8.6-15: Emission mask at mid channel, Ant1, 20 MHz channel

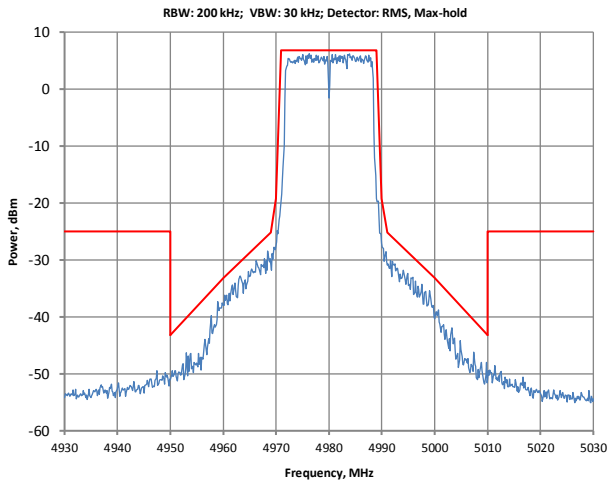


Figure 8.6-16: Emission mask at high channel, Ant1, 20 MHz channel

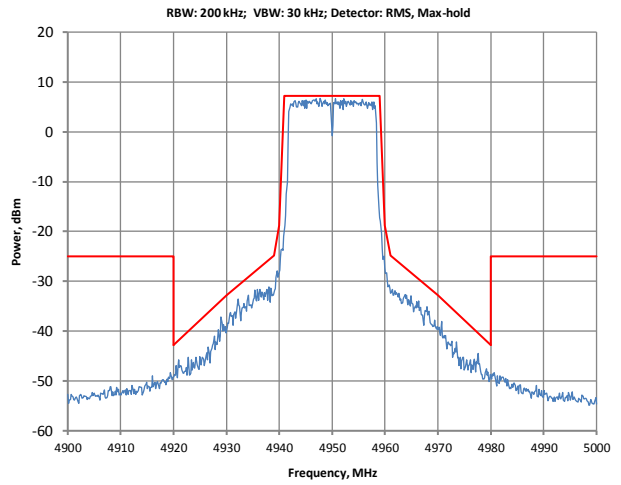


Figure 8.6-17: Emission mask at low channel, Ant2, 20 MHz channel

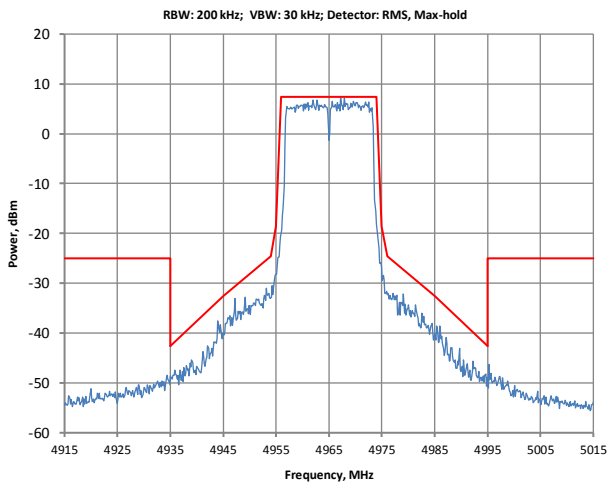


Figure 8.6-18: Emission mask at mid channel, Ant2, 20 MHz channel



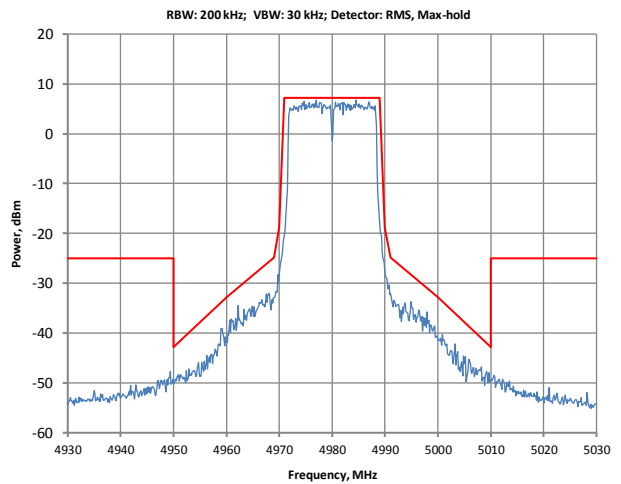


Figure 8.6-19: Emission mask at high channel, Ant2, 20 MHz channel

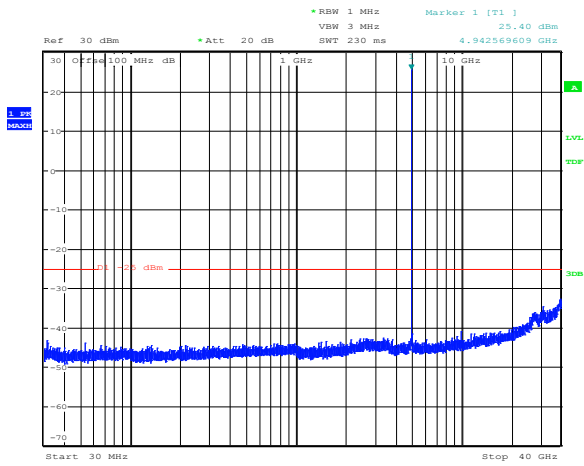


Date: 27.SEP.2017 13:26:50

Figure 8.6-20: Spurious emission at low channel, Ant1, 5 MHz channel

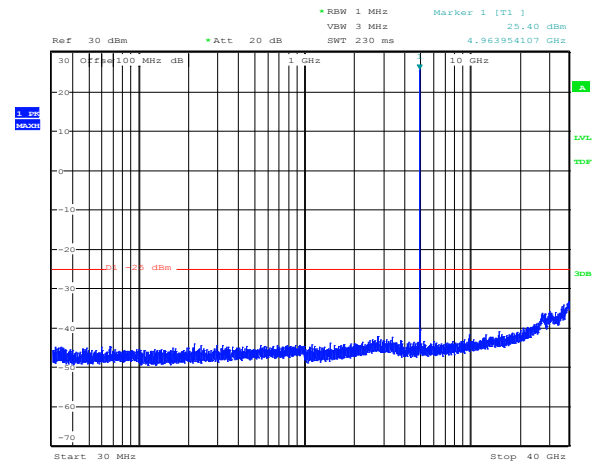


Date: 27.SEP.2017 13:28:33

Figure 8.6-21: Spurious emission at mid channel, Ant1, 5 MHz channel

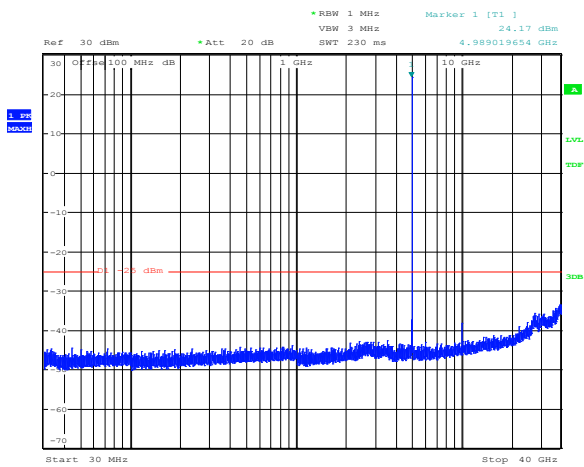


Date: 27.SEP.2017 13:29:17

Figure 8.6-22: Spurious emission at high channel, Ant1, 5 MHz channel

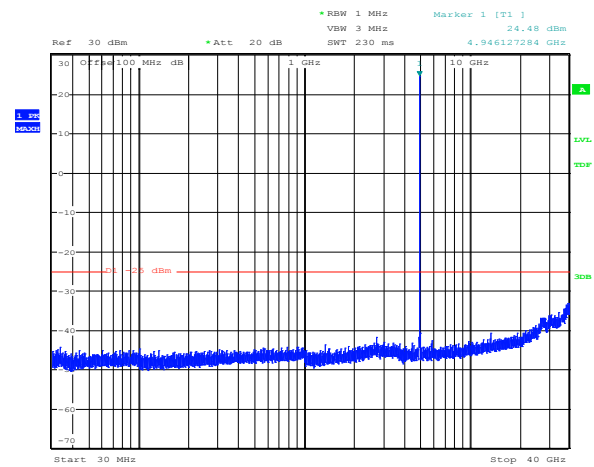


Date: 27.SEP.2017 13:27:30

Figure 8.6-23: Spurious emission at low channel, Ant2, 5 MHz channel

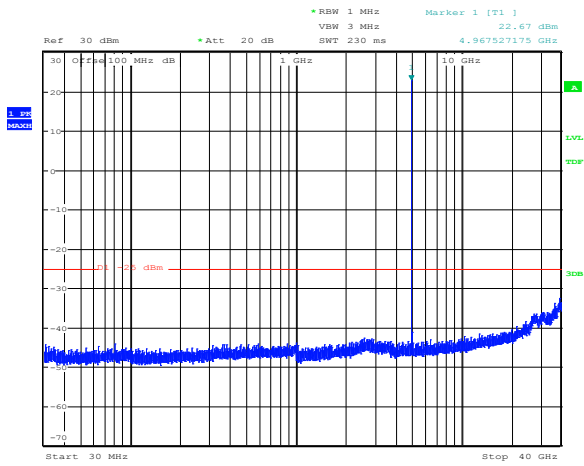


Date: 27.SEP.2017 13:28:01

Figure 8.6-24: Spurious emission at mid channel, Ant2, 5 MHz channel

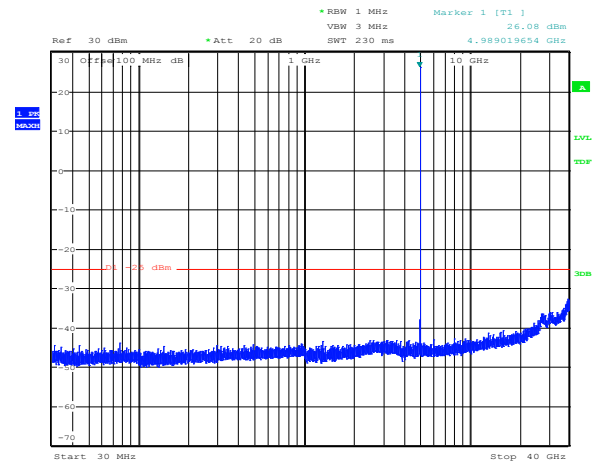


Date: 27.SEP.2017 13:29:47

Figure 8.6-25: Spurious emission at high channel, Ant2, 5 MHz channel

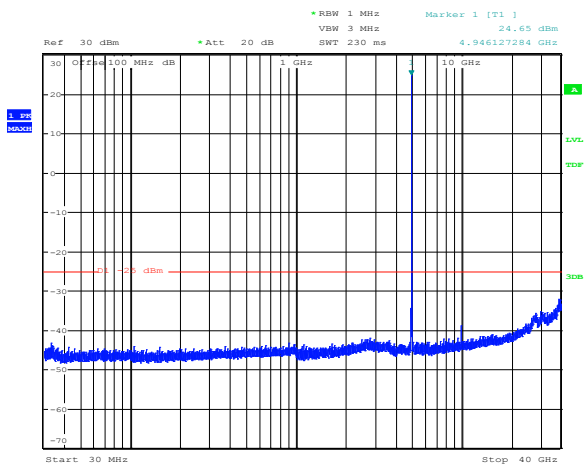


Date: 27.SEP.2017 13:32:23

Figure 8.6-26: Spurious emission at low channel, Ant1, 10 MHz channel

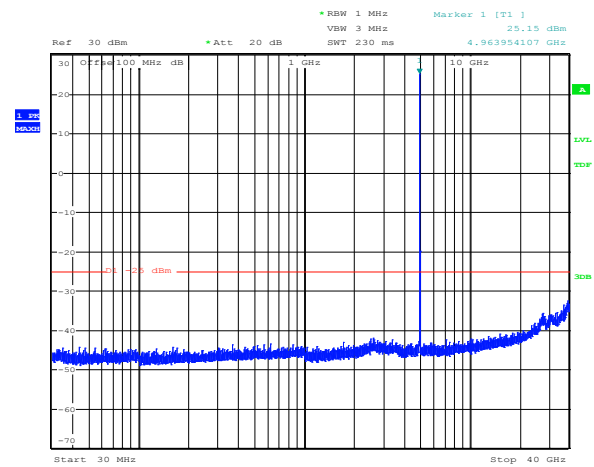


Date: 27.SEP.2017 13:33:18

Figure 8.6-27: Spurious emission at mid channel, Ant1, 10 MHz channel

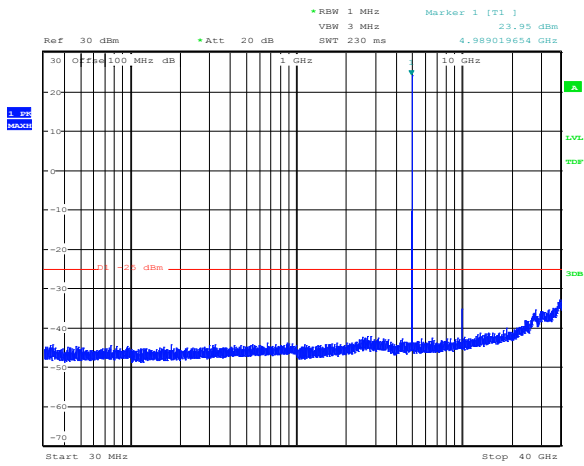


Date: 27.SEP.2017 13:36:04

Figure 8.6-28: Spurious emission at high channel, Ant1, 10 MHz channel

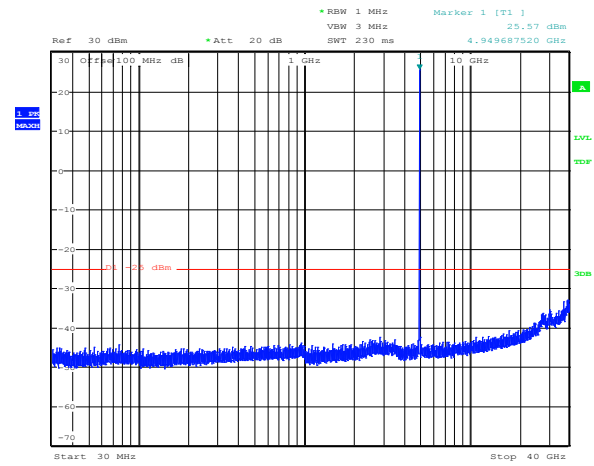


Date: 27.SEP.2017 13:30:37

Figure 8.6-29: Spurious emission at low channel, Ant2, 10 MHz channel

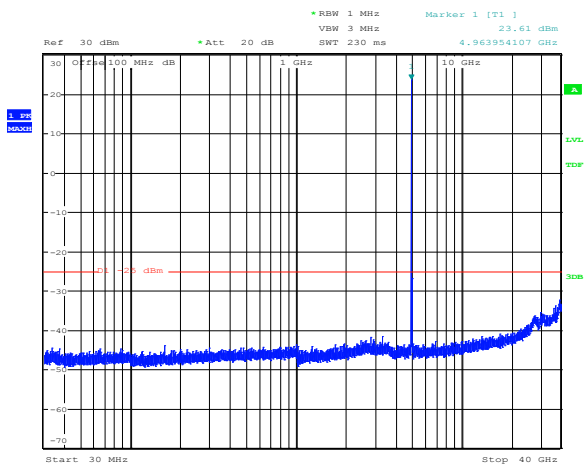


Date: 27.SEP.2017 13:34:18

Figure 8.6-30: Spurious emission at mid channel, Ant2, 10 MHz channel

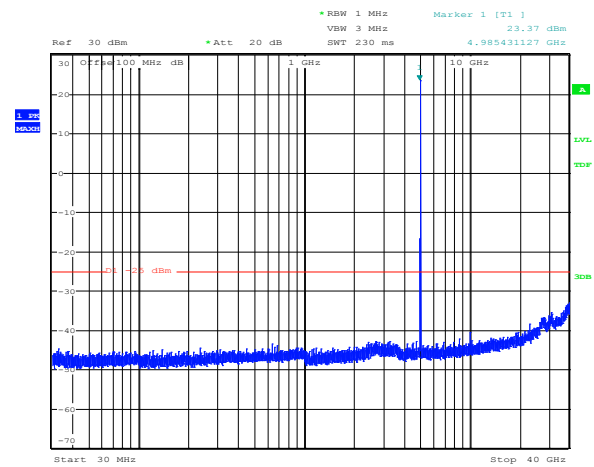


Date: 27.SEP.2017 13:34:56

Figure 8.6-31: Spurious emission at high channel, Ant2, 10 MHz channel

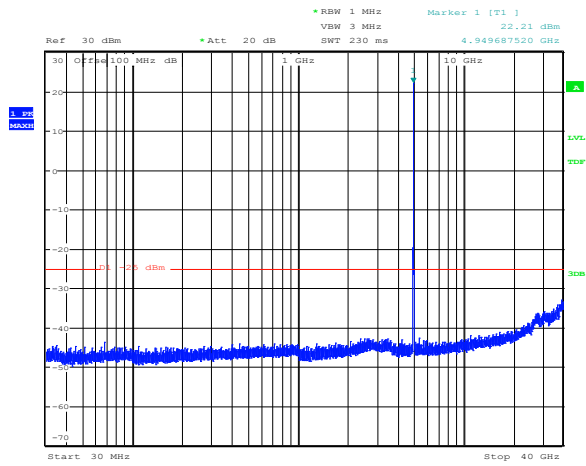


Date: 27.SEP.2017 13:36:55

Figure 8.6-32: Spurious emission at low channel, Ant1, 20 MHz channel

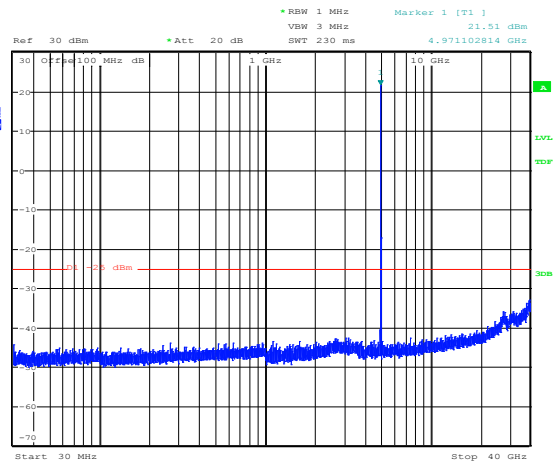


Date: 27.SEP.2017 13:47:20

Figure 8.6-33: Spurious emission at mid channel, Ant1, 20 MHz channel

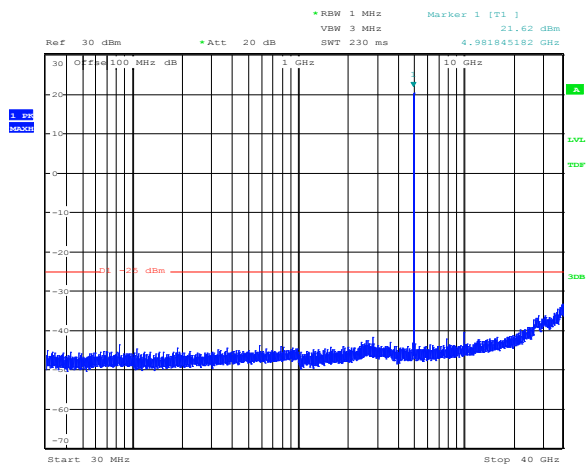


Date: 27.SEP.2017 13:48:14

Figure 8.6-34: Spurious emission at high channel, Ant1, 20 MHz channel

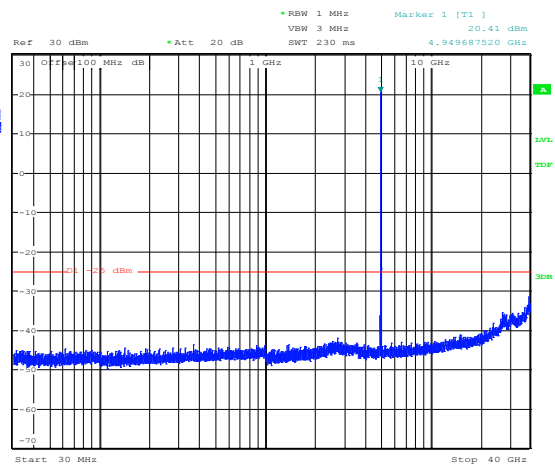


Date: 27.SEP.2017 13:37:34

Figure 8.6-35: Spurious emission at low channel, Ant2, 20 MHz channel

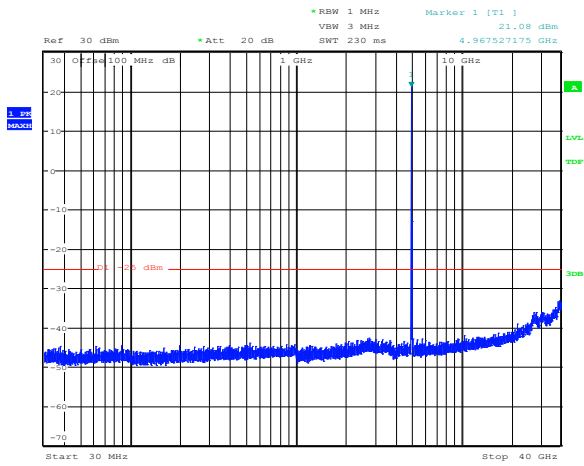

Date: 27.SEP.2017 13:38:05

Figure 8.6-36: Spurious emission at mid channel, Ant2, 20 MHz channel

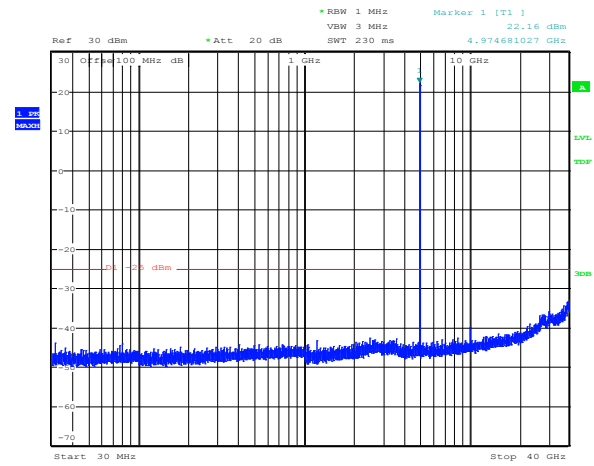

Date: 27.SEP.2017 13:48:42

Figure 8.6-37: Spurious emission at high channel, Ant2, 20 MHz channel

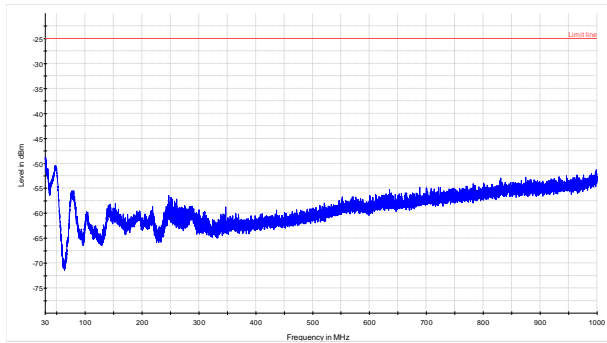


Figure 8.6-38: Cabinet spurious radiation within 30–1000 MHz at low channel, 5 MHz channel, MIMO mode

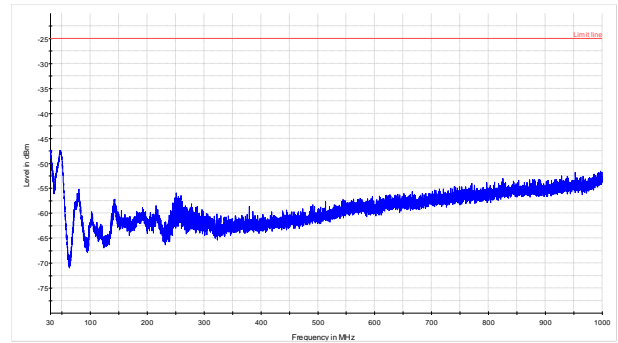


Figure 8.6-39: Cabinet spurious radiation within 30–1000 MHz at mid channel, 5 MHz channel, MIMO mode

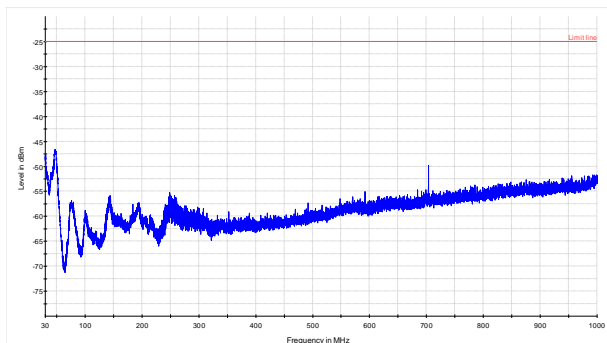


Figure 8.6-40: Cabinet spurious radiation within 30–1000 MHz at high channel, 5 MHz channel, MIMO mode

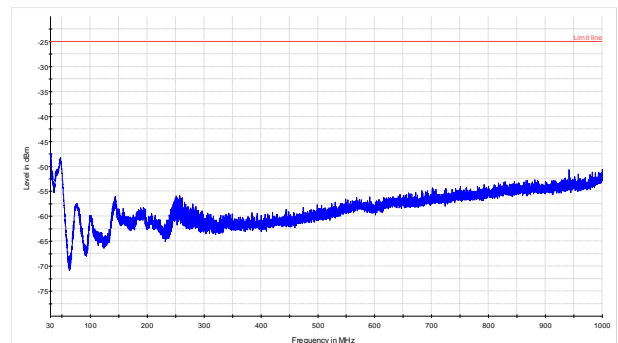


Figure 8.6-41: Cabinet spurious radiation within 30–1000 MHz at low channel, 10 MHz channel, MIMO mode

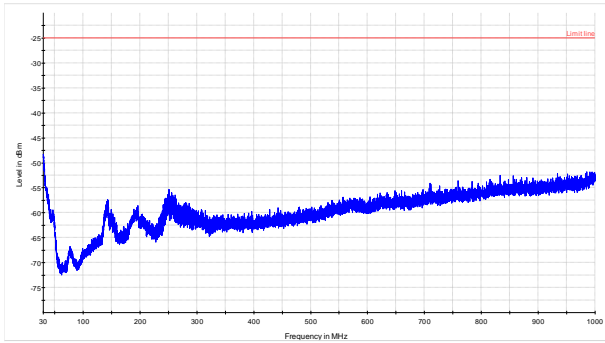


Figure 8.6-42: Cabinet spurious radiation within 30–1000 MHz at mid channel, 10 MHz channel, MIMO mode

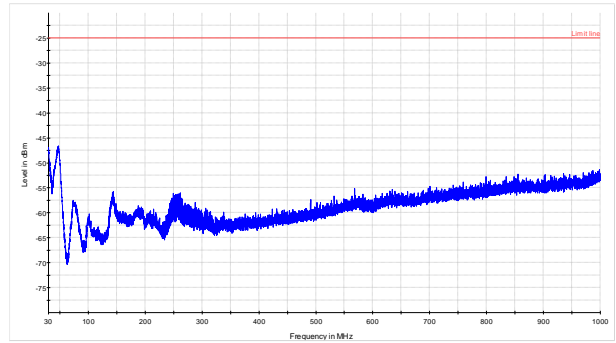


Figure 8.6-43: Cabinet spurious radiation within 30–1000 MHz at high channel, 10 MHz channel, MIMO mode

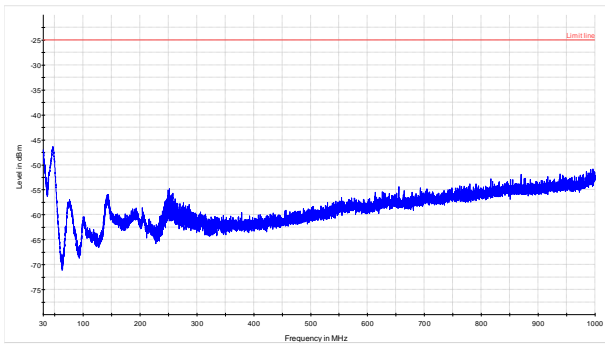


Figure 8.6-44: Cabinet spurious radiation within 30–1000 MHz at low channel, 20 MHz channel, MIMO mode

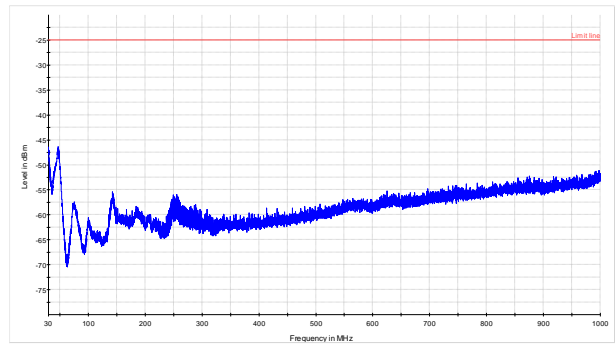


Figure 8.6-45: Cabinet spurious radiation within 30–1000 MHz at mid channel, 20 MHz channel, MIMO mode

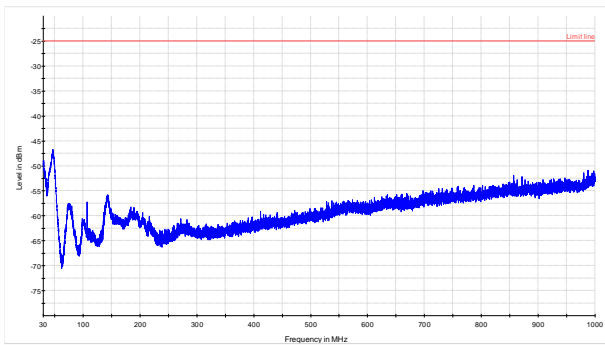


Figure 8.6-46: Cabinet spurious radiation within 30–1000 MHz at high channel, 20 MHz channel, MIMO mode

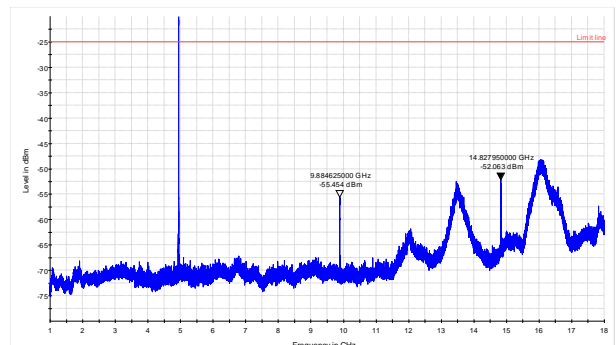


Figure 8.6-47: Cabinet spurious radiation within 1–18 GHz at low channel, 5 MHz channel, MIMO mode

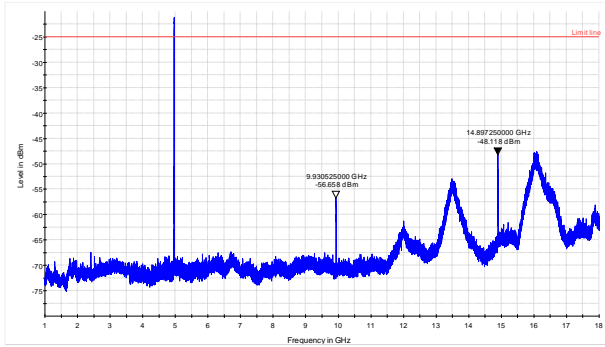


Figure 8.6-48: Cabinet spurious radiation within 1–18 GHz at mid channel, 5 MHz channel, MIMO mode

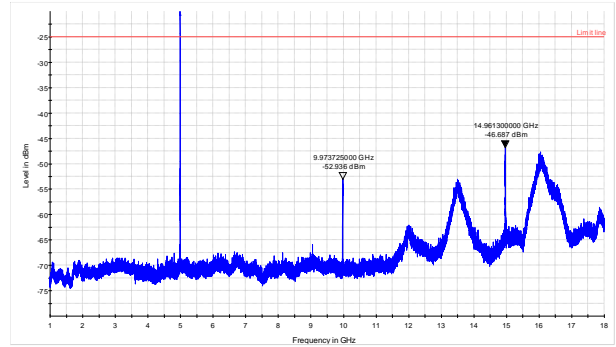


Figure 8.6-49: Cabinet spurious radiation within 1–18 GHz at high channel, 5 MHz channel, MIMO mode

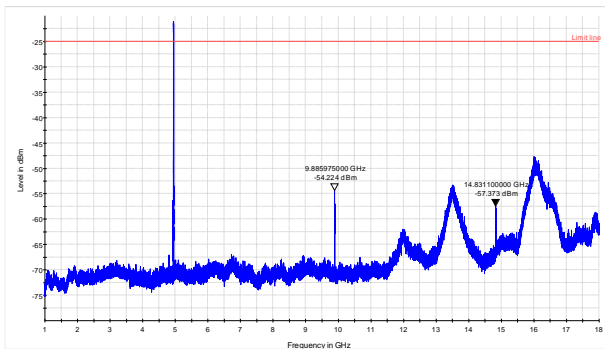


Figure 8.6-50: Cabinet spurious radiation within 1–18 GHz at low channel, 10 MHz channel, MIMO mode

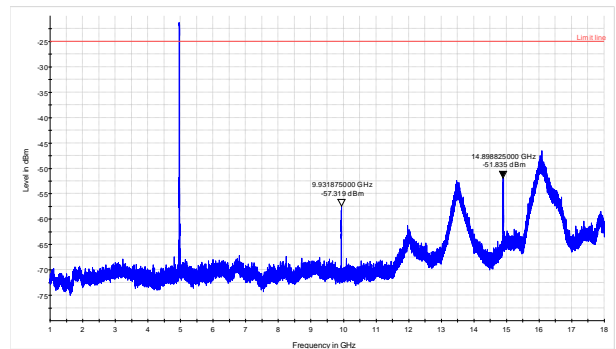


Figure 8.6-51: Cabinet spurious radiation within 1–18 GHz at mid channel, 10 MHz channel, MIMO mode

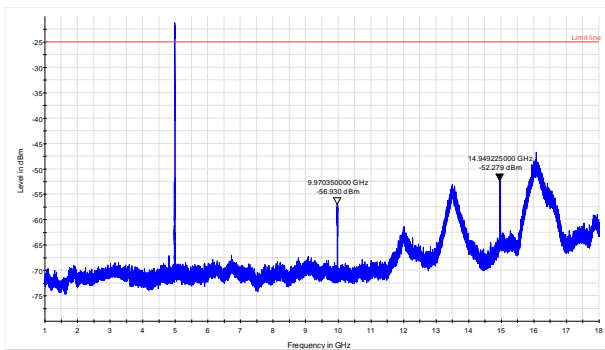


Figure 8.6-52: Cabinet spurious radiation within 1–18 GHz at high channel, 10 MHz channel, MIMO mode

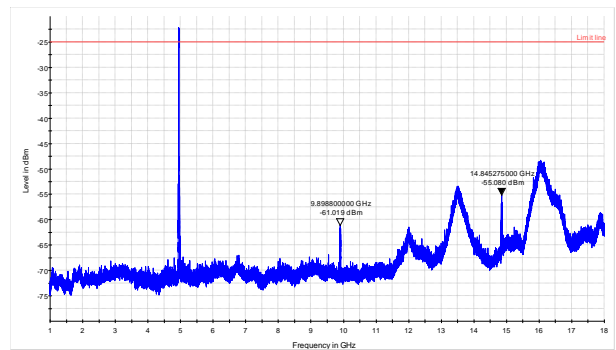


Figure 8.6-53: Cabinet spurious radiation within 1–18 GHz at low channel, 20 MHz channel, MIMO mode

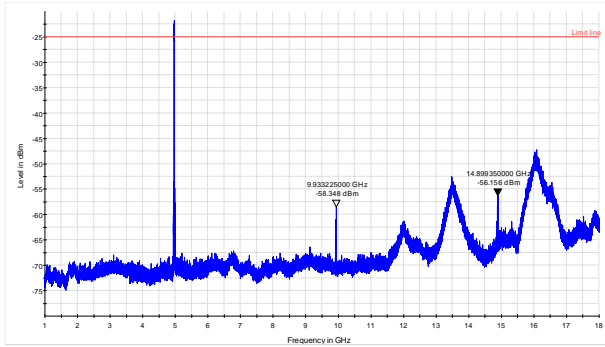


Figure 8.6-54: Cabinet spurious radiation within 1–18 GHz at mid channel, 20 MHz channel, MIMO mode


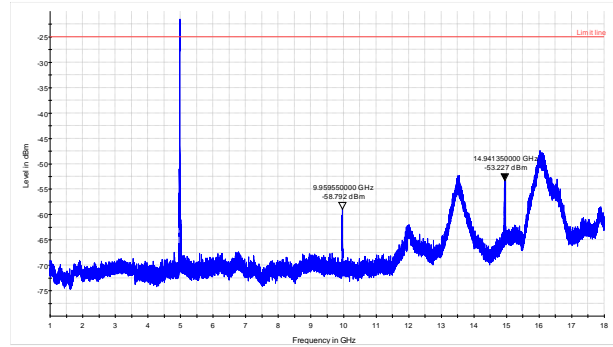


Figure 8.6-55: Cabinet spurious radiation within 1–18 GHz at high channel, 20 MHz channel, MIMO mode


Radiated spurious emissions were also assessed from 18 GHz to 40 GHz. Both antenna ports were terminated with 50 Ω loads. No spurious emissions higher than 15 dB below the limit were detected.

Section 9. Block diagrams of test set-ups

9.1 Radiated emissions below 1 GHz set-up

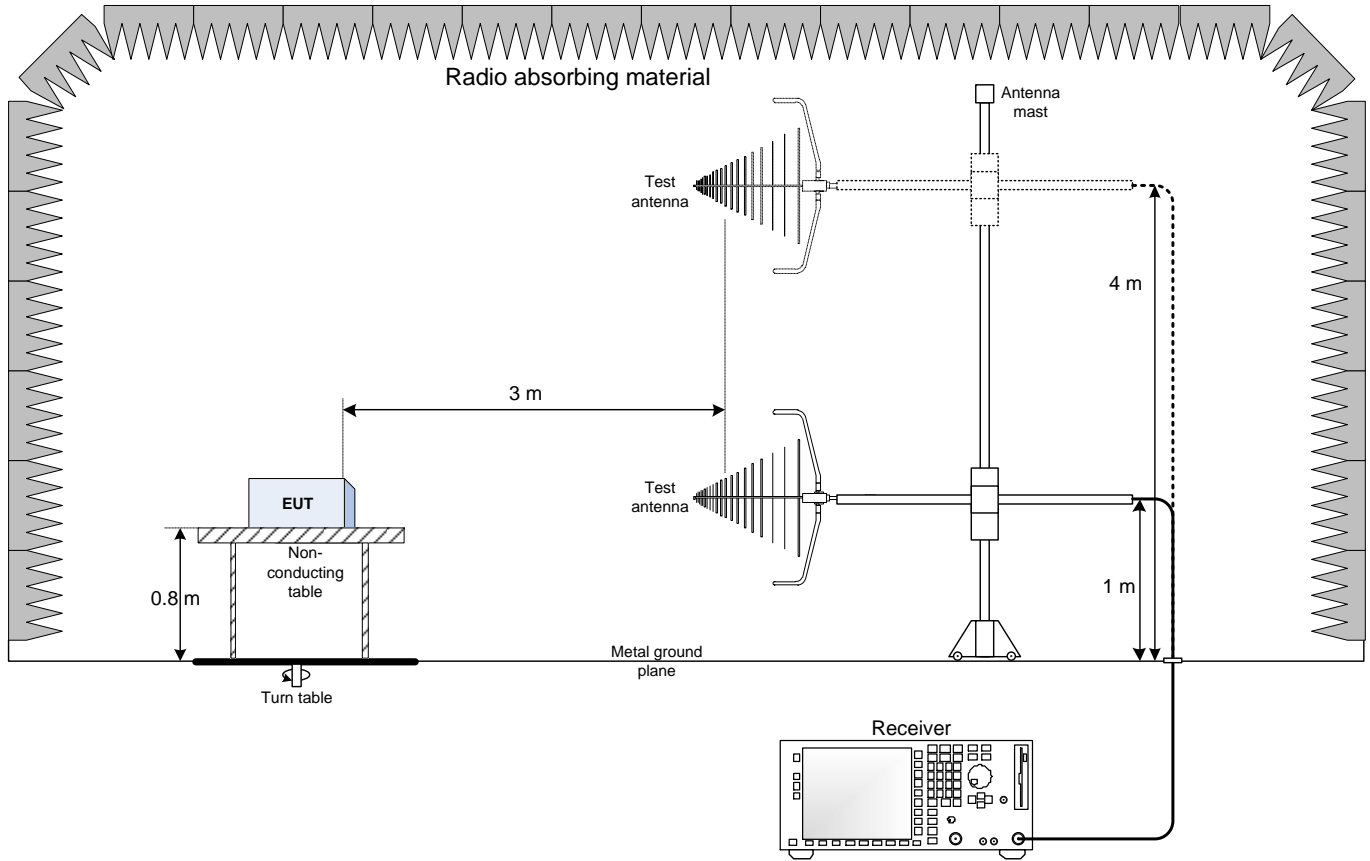

9.2 Radiated emissions set-up for frequencies above 1 GHz

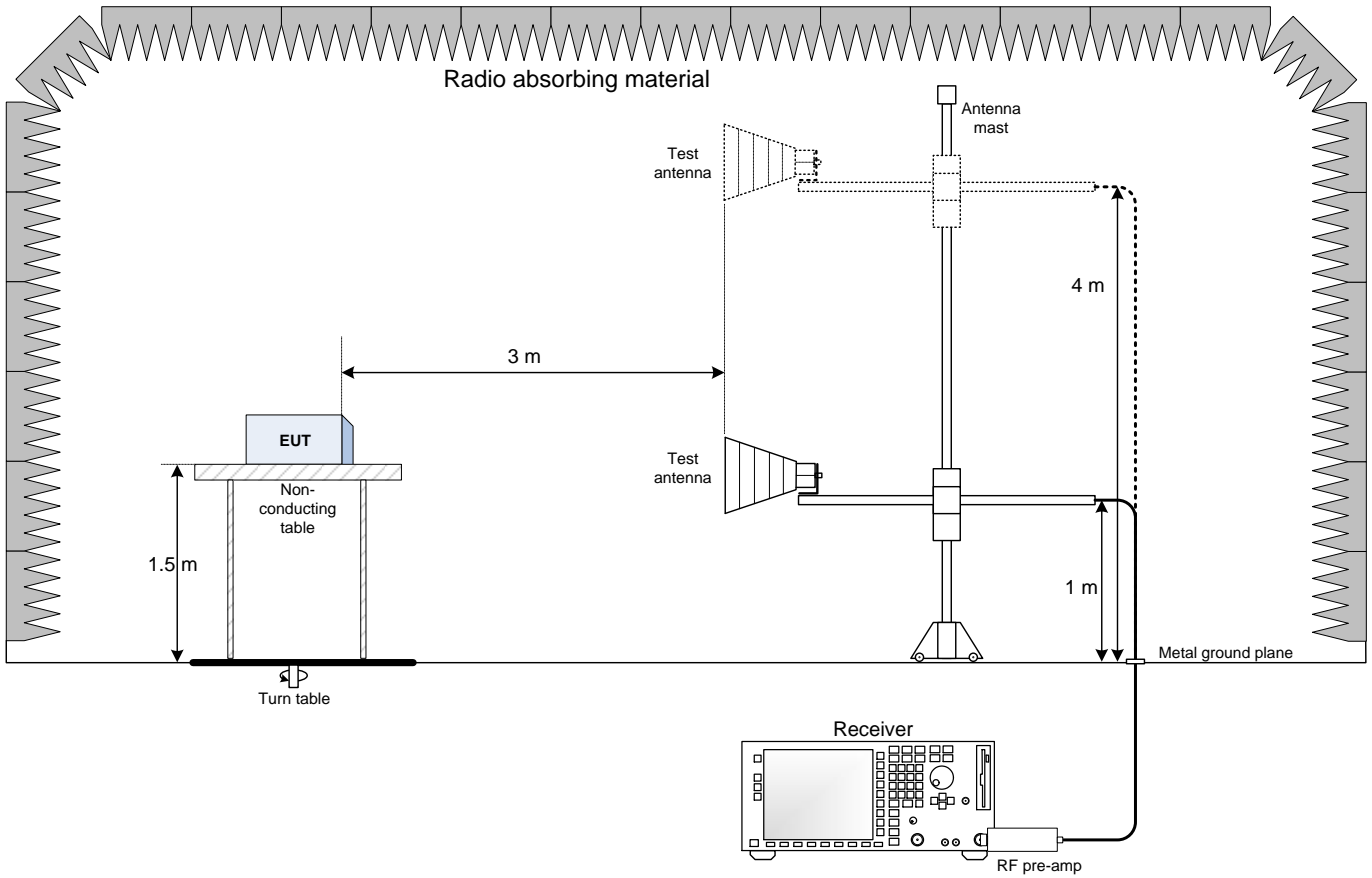

9.3 Conducted emissions set-up

