



# element

**SMART Technologies ULC**

**IDQXMOD1**

**FCC 15.247:2023**

**RSS-247 Issue 2:2017**

**RSS-Gen Issue 5:2018+A1:2019+A2:2021**

**BLE radio with 1 antenna type(s) and 1 antenna port(s)**

**Report: SMTE0005.0 Rev. 1, Issue Date: June 8, 2023**



*This report must not be used to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government. This Report shall not be reproduced, except in full without written approval of the laboratory.*

# CERTIFICATE OF TEST

**Last Date of Test: April 25, 2023**  
**SMART Technologies ULC**  
**EUT: IDQXMOD1**

## Radio Equipment Testing

### Standards

Specification	Method
FCC 15.207:2023	ANSI C63.10:2013, FCC KDB 558074 v05r02:2019
FCC 15.247:2023	ANSI C63.10:2013, FCC KDB 558074 v05r02:2019
RSS-247 Issue 2:2017	ANSI C63.10:2013
RSS-Gen Issue 5:2018+A1:2019+A2:2021	ANSI C63.10:2013

### Results

Test Description	Result	Specification Section(s)	Method Section(s)	Comments
Powerline Conducted Emissions	Pass	15.207, RSS-Gen 8.8	6.2	
Duty Cycle	See Data	KDB 558074 -6.0, RSS-Gen 3.2	11.6	
DTS Bandwidth (6 dB)	Pass	15.247(a)(2), KDB 558074 -8.2, RSS-247 5.2(a)	11.8.2	
Occupied Bandwidth (99%)	See Data	KDB 558074 -2.1, RSS-Gen 6.7	6.9.3	
Output Power	Pass	15.247(b)(3), KDB 558074 -8.3.1, RSS-247 5.4(d, f), RSS-Gen 6.12	11.9.1.1, 11.9.2.2.4	
Equivalent Isotropic Radiated Power	Pass	15.247(b)(3), KDB 558074 -8.3.1, RSS-247 5.4(d, f), RSS-Gen 6.12	11.9.1.1, 11.9.2.2.4	
Power Spectral Density	Pass	15.247(e), KDB 558074 -8.4, RSS-Gen 5.2(b)	11.10.2	
Band Edge Compliance	Pass	15.247(d), KDB 558074 -8.5, RSS-247 5.5	11.11	
Spurious Conducted Emissions	Pass	15.247(d), KDB 558074 -8.5, RSS-247 5.5	11.11	
Spurious Radiated Emissions - Spot Checks	Pass	15.247(d), KDB 558074 -8.6, 8.7, RSS-247 5.5, RSS-Gen 6.13, 8.10	11.12.1, 11.13.2, 6.5, 6.6	

### Deviations From Test Standards

None

*Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.*

# CERTIFICATE OF TEST

**Approved By:**



Chuck Heller, Department Manager

*Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.*

# REVISION HISTORY



<b>Revision Number</b>	<b>Description</b>	<b>Date</b> (yyyy-mm-dd)	<b>Page Number</b>
01	Updated typo on Configurations	2023-06-08	13
01	Updated Serial numbers on configurations	2023-06-08	13-14
01	Updated Test name on Spurious Radiated Emissions	2023-06-08	30-36

# ACCREDITATIONS AND AUTHORIZATIONS



---

## United States

**FCC** - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

**A2LA** - Each laboratory is accredited by A2LA to ISO / IEC 17025, and as a product certifier to ISO / IEC 17065 which allows Element to certify transmitters to FCC and IC specifications.

---

## Canada

**ISED** - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB) and as a CAB for the acceptance of test data.

---

## European Union

**European Commission** – Recognized as an EU Notified Body validated for the EMCD and RED Directives.

---

## United Kingdom

**BEIS** – Recognized by the UK as an Approved Body under the UK Radio Equipment and UK EMC Regulations.

---

## Australia/New Zealand

**ACMA** - Recognized by ACMA as a CAB for the acceptance of test data.

---

## Korea

**MSIT / RRA** - Recognized by KCC's RRA as a CAB for the acceptance of test data.

---

## Japan

**VCCI** - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

---

## Taiwan

**BSMI** – Recognized by BSMI as a CAB for the acceptance of test data.

**NCC** - Recognized by NCC as a CAB for the acceptance of test data.

---

## Singapore

**IDA** – Recognized by IDA as a CAB for the acceptance of test data.

---

## Israel

**MOC** – Recognized by MOC as a CAB for the acceptance of test data.

---

## Hong Kong

**OFCA** – Recognized by OFCA as a CAB for the acceptance of test data.

---

## Vietnam

**MIC** – Recognized by MIC as a CAB for the acceptance of test data.

---

## SCOPE

For details on the Scopes of our Accreditations, please visit:

[California](#)

[Minnesota](#)

[Oregon](#)


[Texas](#)

[Washington](#)

# FACILITIES



<b>California</b> Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	<b>Minnesota</b> Labs MN01-11 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	<b>Oregon</b> Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	<b>Texas</b> Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	<b>Washington</b> Labs NC01-05 19201 120 <sup>th</sup> Ave NE Bothell, WA 98011 (425)984-6600
<b>A2LA</b>				
Lab Code: 3310.04	Lab Code: 3310.05	Lab Code: 3310.02	Lab Code: 3310.03	Lab Code: 3310.06
<b>Innovation, Science and Economic Development Canada</b>				
2834B-1, 2834B-3	2834E-1, 2834E-3	2834D-1	2834G-1	2834F-1
<b>BSMI</b>				
SL2-IN-E-1154R	SL2-IN-E-1152R	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
<b>VCCI</b>				
A-0029	A-0109	A-0108	A-0201	A-0110
<b>Recognized Phase I CAB for ISED, ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA</b>				
US0158	US0175	US0017	US0191	US0157

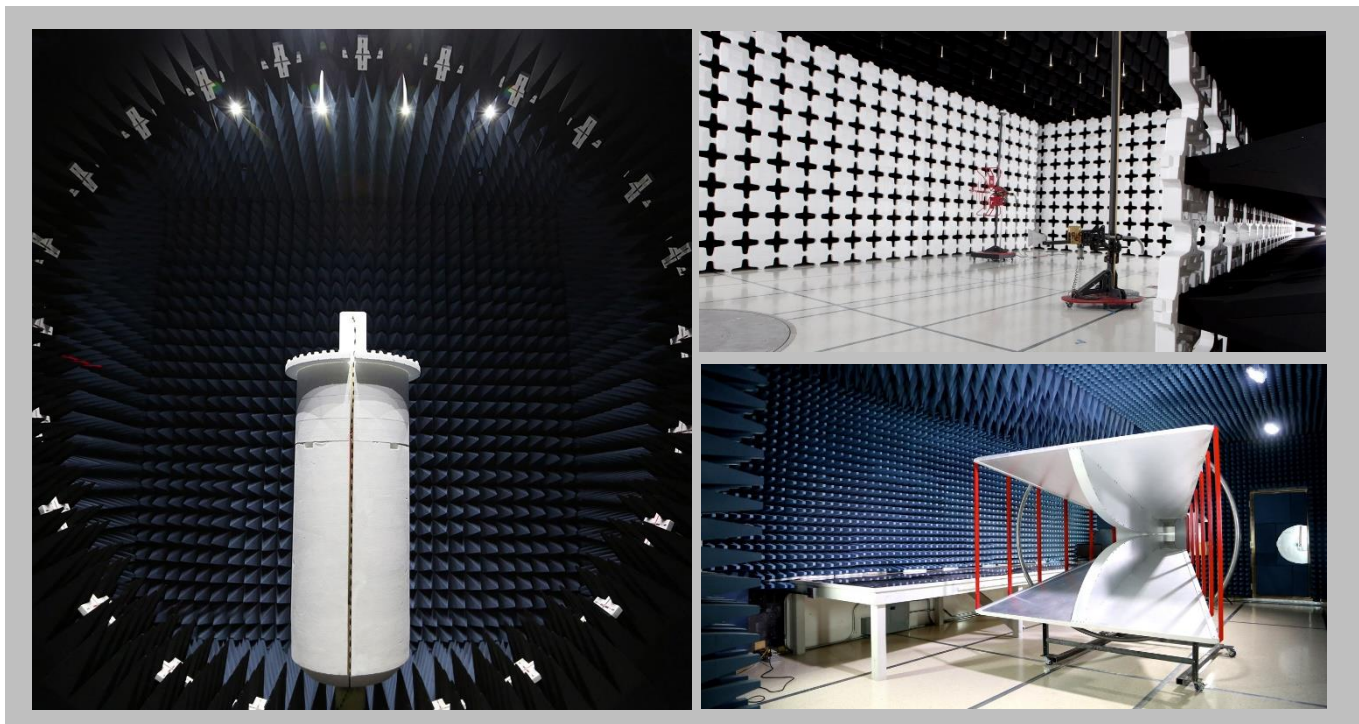

# MEASUREMENT UNCERTAINTY



## Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found in the table below. A lab specific value may also be found in the applicable test description section. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

<b>Test</b>	<b>+ MU</b>	<b>- MU</b>
Frequency Accuracy	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	1.2 dB	-1.2 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	3.1 dB	-3.1 dB


# TEST SETUP BLOCK DIAGRAMS

## Measurement Bandwidths

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

Unless otherwise stated, measurements were made using the bandwidths and detectors specified. No video filter was used.


## Antenna Port Conducted Measurements

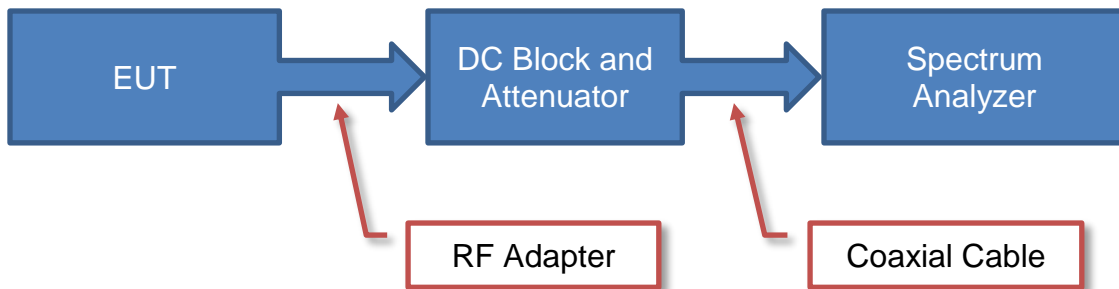

### Sample Calculation (logarithmic units)

$$\begin{array}{rcccl}
 \text{Measured Value} & & \text{Measured Level} & & \text{Reference Level Offset} \\
 71.2 & = & 42.6 & + & 28.6
 \end{array}$$

## Near Field Test Fixture Measurements

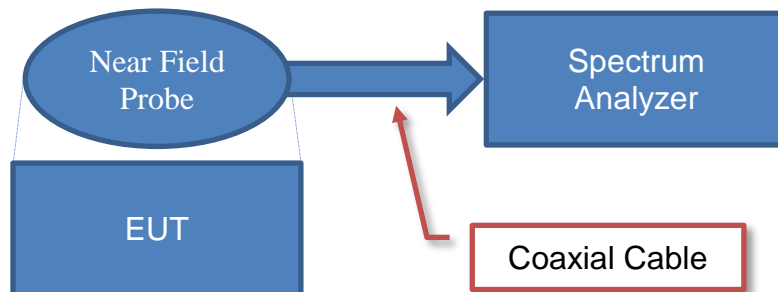


### Sample Calculation (logarithmic units)

$$\begin{array}{rcccl}
 \text{Measured Value} & & \text{Measured Level} & & \text{Reference Level Offset} \\
 71.2 & = & 42.6 & + & 28.6
 \end{array}$$



# TEST SETUP BLOCK DIAGRAMS

## Emissions Measurements

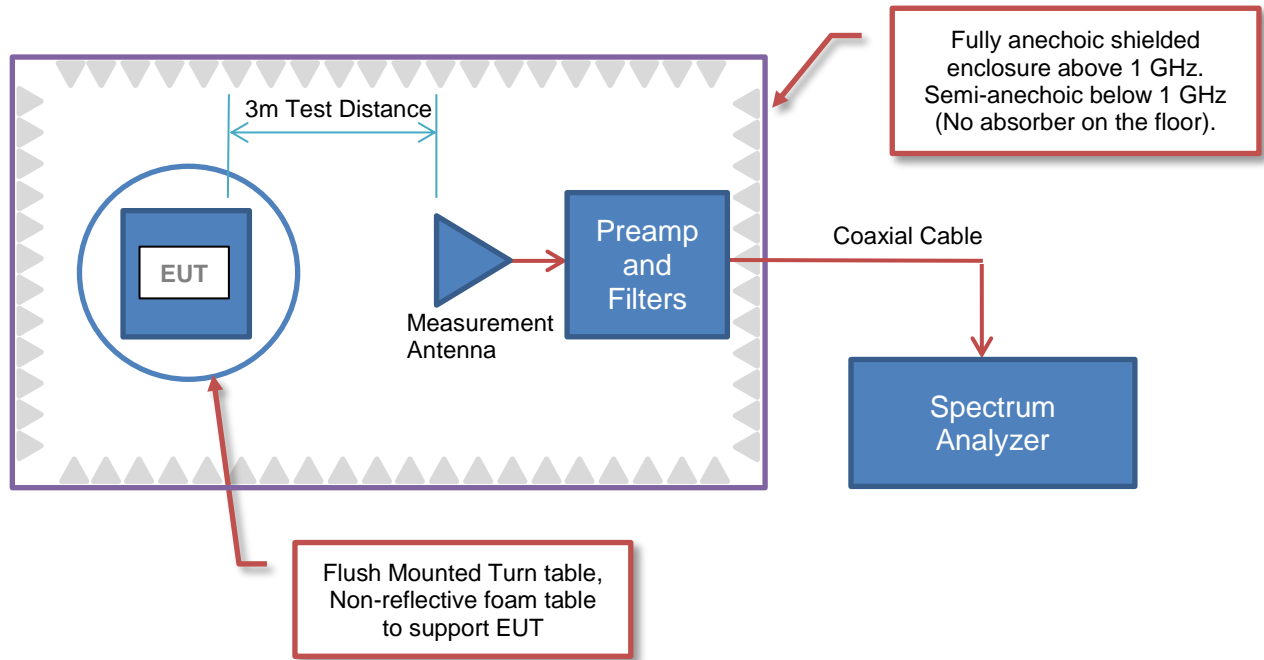

### Sample Calculation (logarithmic units)

#### Radiated Emissions:

Measured Level (Amplitude)	Factor			Distance Adjustment Factor	External Attenuation	Field Strength
	Antenna Factor	Cable Factor	Amplifier Gain			
42.6	28.6	3.1	40.8	0.0	0.0	33.5

42.6 + 28.6 + 3.1 - 40.8 + 0.0 + 0.0 = 33.5

#### Conducted Emissions:

Measured Level (Amplitude)	Factor		External Attenuation	Adjusted Level
	Transducer Factor	Cable Factor		
26.7	0.3	0.1	20.0	47.1

26.7 + 0.3 + 0.1 + 20.0 = 47.1

#### Radiated Power (ERP/EIRP) – Substitution Method:


Measured Level into Substitution Antenna (Amplitude dBm)	Substitution Antenna Factor (dBi)	EIRP to ERP (if applicable)	Measured power (dBm ERP/EIRP)
10.0	6.0	2.15	13.9/16.0

10.0 + 6.0 - 2.15 = 13.9/16.0

# TEST SETUP BLOCK DIAGRAMS

## Bore Sighting (>1GHz)

The diameter of the illumination area is the dimension of the line tangent to the EUT formed by 3 dB beamwidth of the measurement antenna at the measurement distance. At a 3 meter test distance, the diameter of the illumination area was 3.8 meters at 1 GHz and greater than 2.1 meters up to 6 GHz. Above 1 GHz, when required by the measurement standard, the antenna is pointed for both azimuth and elevation to maintain the receive antenna within the cone of radiation from the EUT. The specified measurement detectors were used for comparison of the emissions to the peak and average specification limits.

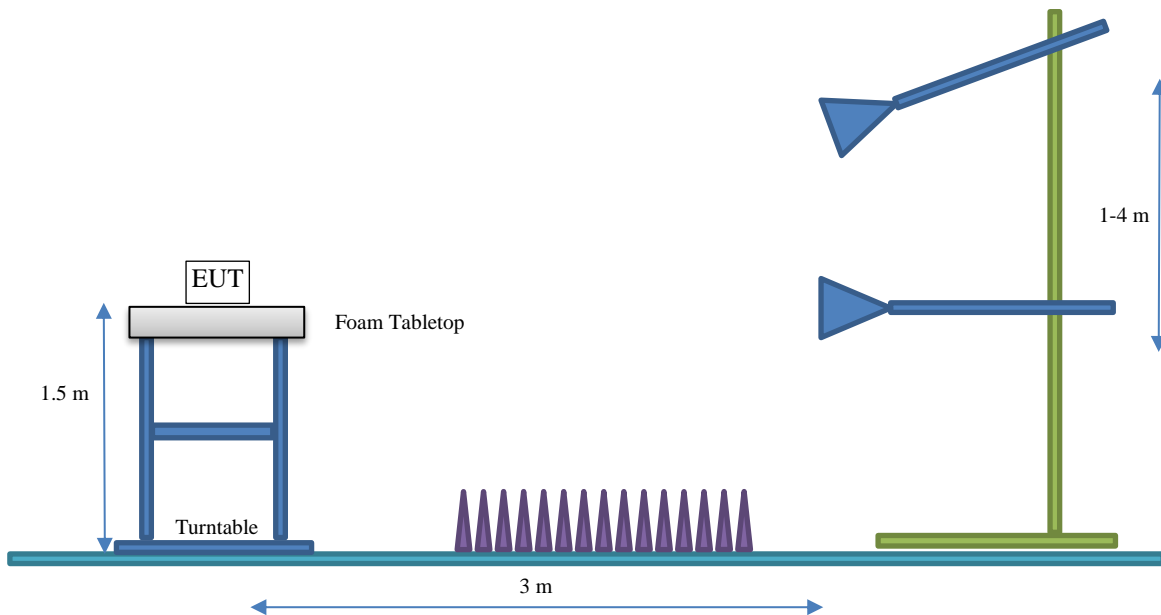

# PRODUCT DESCRIPTION



## Client and Equipment under Test (EUT) Information

<b>Company Name:</b>	SMART Technologies ULC
<b>Address:</b>	3636 Research Road NW
<b>City, State, Zip:</b>	Calgary, AB, T2L 1Y1
<b>Test Requested By:</b>	Sean MacKellar
<b>EUT:</b>	IDQXMOD1
<b>First Date of Test:</b>	February 28, 2023
<b>Last Date of Test:</b>	April 25, 2023
<b>Receipt Date of Samples:</b>	February 28, 2023
<b>Equipment Design Stage:</b>	Production
<b>Equipment Condition:</b>	No Damage
<b>Purchase Authorization:</b>	Verified

## Information Provided by the Party Requesting the Test

### Functional Description of the EUT:

IDQXMOD1 is a Bluetooth low energy radio module integrated on the Tool Sense Controller which be installed within the SMART QX Series IFP display, Models: IDQX65-1, IDQX75-1, and IDQX86-1.

### Testing Objective:

To demonstrate compliance of the module per KDB 996369 for the Bluetooth radio to FCC 15.247/RSS-247 requirements.

# POWER SETTINGS AND ANTENNAS



The power settings, antenna gain value(s) and cable loss (if applicable) used for the testing contained in this report were provided by the customer and will affect the validity of the results. Element assumes no responsibility for the accuracy of this information. The power settings below reflect the maximum power that the EUT is allowed to transmit at during normal operation.

## ANTENNA GAIN (dBi)

Type	Provided by:	Frequency Range (MHz)	Gain (dBi)
Flexible printed circuit	Linx Technologies	2400 – 2500	4

The EUT was tested using the power settings provided by the manufacturer which were based upon:

- Test software settings      Test software/firmware installed on EUT: \_\_\_\_\_Atmosic SDK 5.1.0\_\_\_\_\_
- Rated power settings

## SETTINGS FOR ALL TESTS IN THIS REPORT

Modulation Types / Data Rates	Type	Channel	Frequency (MHz)	Power Setting
BLE GFSK 1 Mbps	DTS	0	2402	0 dBm
		20	2442	0 dBm
		39	2480	0 dBm

# CONFIGURATIONS



## Configuration SMTE0005-2

Software/Firmware Running During Test	
Description	Version
Atmosic RF tool	1.6.4
Atmosic SDK	5.1.0

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Tool Sense controller board	SMART Technologies	IDQXMOD1	Sample 1

Peripherals in Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Interface board	Atmosic	N/A	None

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Laptop	HP	HSN-124C-4	5CG925B25F

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
USB extension cable	Yes	4.5 meters	None	USB-A cable	interface board
USB-A to mini-USB cable	Yes	1 meter	None	laptop	USB extension cable
flex cable	No	0.3 meters	None	interface board	Tool Sense controller board

## Configuration SMTE0005-6

Software/Firmware Running During Test	
Description	Version
Atmosic RF tool	1.6.4
Atmosic SDK	5.1.0

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Tool Sense controller board	SMART Technologies	IDQXMOD1	Sample 1

Peripherals in Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Interface board	Atmosic	N/A	None
Laptop	HP	HSN-124C-4	5CG925B25F
DC Power Supply	Tektronix	PS280	TW55636

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
USB-A to mini-USB cable	Yes	1 meter	None	laptop	Interface board
flex cable	No	0.3 meters	None	interface board	Tool Sense controller board

# CONFIGURATIONS



## Configuration SMTE0005-10

Software/Firmware Running During Test	
Description	Version
Atmosic RF tool	1.6.4
Atmosic SDK	5.1.0

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Tool Sense controller board	SMART Technologies	IDQXMOD1	Sample 1

Peripherals in Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Interface board	Atmosic	N/A	None
Laptop	HP	HSN-124C-4	5CG925B25F
DC Power Supply	Tektronix	PS280	TW55636

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
USB-A to mini-USB cable	Yes	1 meter	None	laptop	interface board
flex cable	No	0.3 meters	None	interface board	Tool Sense controller board
DC Wire Harness	No	1 meter	None	Tool Sense board	Red & Black Leads

# MODIFICATIONS



## Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	2023-03-01	Spurious Radiated Emissions	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	2023-03-01	Equivalent Isotropic Radiated Power	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	2023-03-01	Output Power	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	2023-04-20	DTS Bandwidth	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
5	2023-04-20	Occupied Bandwidth (99%)	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
6	2023-04-20	Band Edge Compliance	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
7	2023-04-20	Spurious Conducted Emissions	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
8	2023-04-20	Duty Cycle	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
9	2023-04-20	Power Spectral Density	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
10	2023-04-25	Powerline Conducted Emissions	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

# POWERLINE CONDUCTED EMISSIONS



## TEST DESCRIPTION

Using the mode of operation and configuration noted within this report, conducted emissions tests were performed. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Per the standard, an insulating material was also added to ground plane between the EUT's power and remote I/O cables. Equipment is tested with power cords that are normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network), the 50ohm measuring port is terminated by a 50ohm EMI meter or a 50ohm resistive load. All 50ohm measuring ports of the LISN are terminated by 50ohm. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
LISN	Solar Electronics	9252-50-R-24-BNC	LIK	2022-07-05	2023-07-05
Cable - Conducted Cable Assembly	Northwest EMC	NC4, HHF, TYL	NC4A	2023-02-13	2024-02-13
Receiver	Rohde & Schwarz	ESCI	ARE	2022-11-02	2023-11-02

## MEASUREMENT UNCERTAINTY

Description		
Expanded k=2	3.1 dB	-3.1 dB

## CONFIGURATIONS INVESTIGATED

SMTE0005-10

## MODES INVESTIGATED

Transmitting BLE, Middle Channel 20 = 2442 MHz, 1 Mbps, TX power at 0 dBm



# POWERLINE CONDUCTED EMISSIONS



EUT:	IDQXMOD1	Work Order:	SMTE0005
Serial Number:	Sample 1	Date:	2023-04-25
Customer:	SMART Technologies	Temperature:	21.1°C
Attendees:	Sean MacKellar	Relative Humidity:	40%
Customer Project:	None	Bar. Pressure (PMSL):	1023 mb
Tested By:	Harry Zhao	Job Site:	NC05
Power:	5VDC via 120V/60Hz AC/DC converter	Configuration:	SMTE0005-10

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2023	ANSI C63.10:2013
RSS-247 Issue 2:2017	ANSI C63.10:2013
RSS-Gen Issue 5:2018+A1:2019+A2:2021	ANSI C63.10:2013

## TEST PARAMETERS

Run #:	2	Line:	High Line	Add. Ext. Attenuation (dB):	0
--------	---	-------	-----------	-----------------------------	---

## COMMENTS



None

## EUT OPERATING MODES

Transmitting BLE, Middle Channel 20 = 2442 MHz, 1 Mbps, TX power at 0 dBm

## DEVIATIONS FROM TEST STANDARD

None

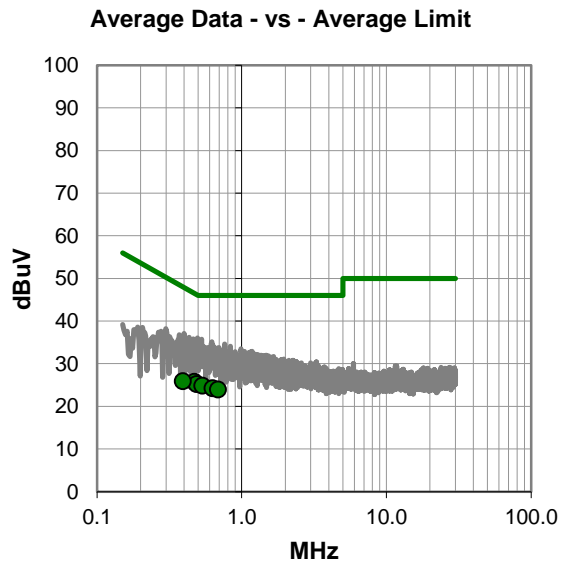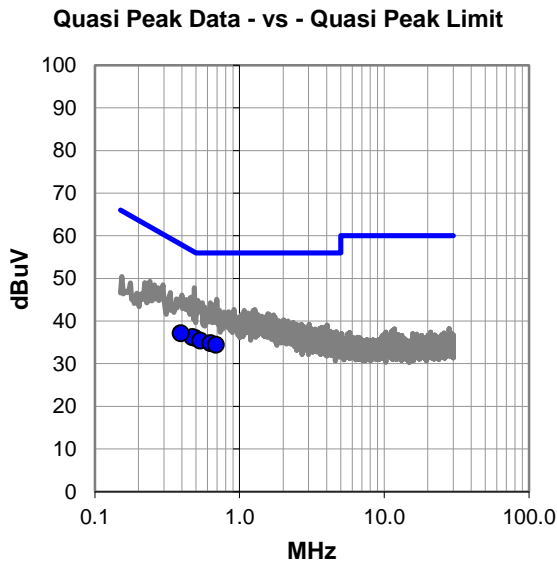

# POWERLINE CONDUCTED EMISSIONS



## RESULTS - Run #2

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
0.487	15.7	20.4	36.1	56.2	-20.1
0.471	15.8	20.4	36.2	56.5	-20.3
0.535	15.0	20.4	35.4	56.0	-20.6
0.391	16.7	20.4	37.1	58.0	-20.9
0.628	14.4	20.4	34.8	56.0	-21.2
0.687	14.0	20.4	34.4	56.0	-21.6

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
0.471	5.3	20.4	25.7	46.5	-20.8
0.487	4.8	20.4	25.2	46.2	-21.0
0.535	4.4	20.4	24.8	46.0	-21.2
0.628	3.8	20.4	24.2	46.0	-21.8
0.391	5.5	20.4	25.9	48.0	-22.1
0.687	3.5	20.4	23.9	46.0	-22.1

## CONCLUSION

Pass

Tested By

# POWERLINE CONDUCTED EMISSIONS



EUT:	IDQXMOD1	Work Order:	SMTE0005
Serial Number:	Sample 1	Date:	2023-04-25
Customer:	SMART Technologies	Temperature:	21.1°C
Attendees:	Sean MacKellar	Relative Humidity:	40%
Customer Project:	None	Bar. Pressure (PMSL):	1023 mb
Tested By:	Harry Zhao	Job Site:	NC05
Power:	5VDC via 120V/60Hz AC/DC converter	Configuration:	SMTE0005-10

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2023	ANSI C63.10:2013
RSS-247 Issue 2:2017	ANSI C63.10:2013
RSS-Gen Issue 5:2018+A1:2019+A2:2021	ANSI C63.10:2013

## TEST PARAMETERS

Run #:	4	Line:	Neutral	Add. Ext. Attenuation (dB):	0
--------	---	-------	---------	-----------------------------	---

## COMMENTS



None

## EUT OPERATING MODES

Transmitting BLE, Middle Channel 20 = 2442 MHz, 1 Mbps, TX power at 0 dBm

## DEVIATIONS FROM TEST STANDARD

None

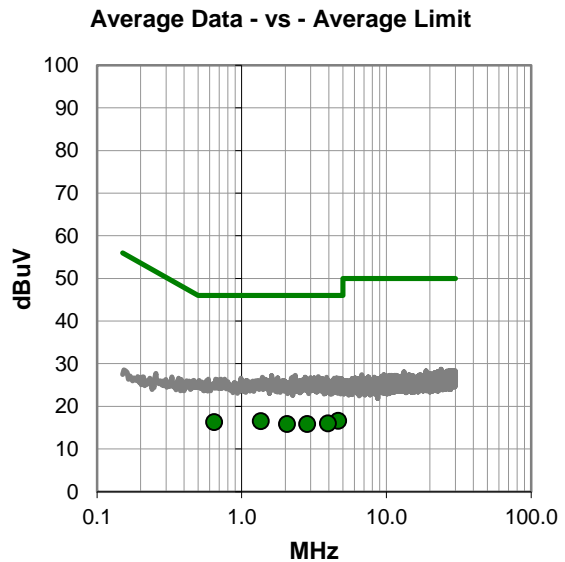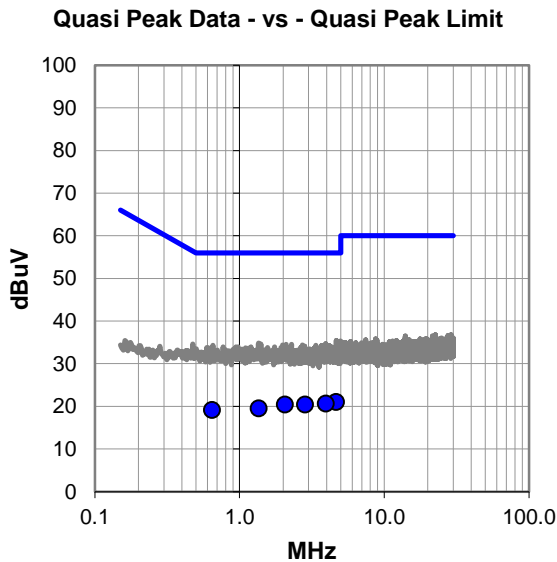

# POWERLINE CONDUCTED EMISSIONS



## RESULTS - Run #4

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
4.642	0.3	20.7	21.0	56.0	-35.0
3.960	-0.1	20.7	20.6	56.0	-35.4
2.064	-0.1	20.5	20.4	56.0	-35.6
2.833	-0.2	20.6	20.4	56.0	-35.6
1.357	-1.0	20.5	19.5	56.0	-36.5
0.646	-1.3	20.4	19.1	56.0	-36.9

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
4.642	-4.1	20.7	16.6	46.0	-29.4
1.357	-4.0	20.5	16.5	46.0	-29.5
0.646	-4.1	20.4	16.3	46.0	-29.7
3.960	-4.7	20.7	16.0	46.0	-30.0
2.064	-4.7	20.5	15.8	46.0	-30.2
2.833	-4.8	20.6	15.8	46.0	-30.2

## CONCLUSION

Pass

Tested By

# DUTY CYCLE



XMIT 2023.02.14.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAT	2022-11-03	2023-11-03
Cable	Micro-Coax	UFD150A-1-0720-200200	NCW	2023-01-18	2024-01-18
Generator - Signal	Agilent	N5183A	TIA	2022-06-25	2024-06-25
Attenuator	Fairview Microwave	SA4014-20	QAA	2023-02-17	2024-02-17
Block - DC	Weinschel Corp.	7006	AMS	2023-01-18	2024-01-18

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.

There is no compliance requirement to be met by this test, so therefore no Pass / Fail criteria.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

If the transmit duty cycle < 98 percent, burst gating may have been used during some of the other tests in this report to only take the measurement during the burst duration.




# DUTY CYCLE




TbTx 2022.06.03.0 XMI 2023.02.14.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
346.638 us	625 us	1	55.5	N/A	N/A	

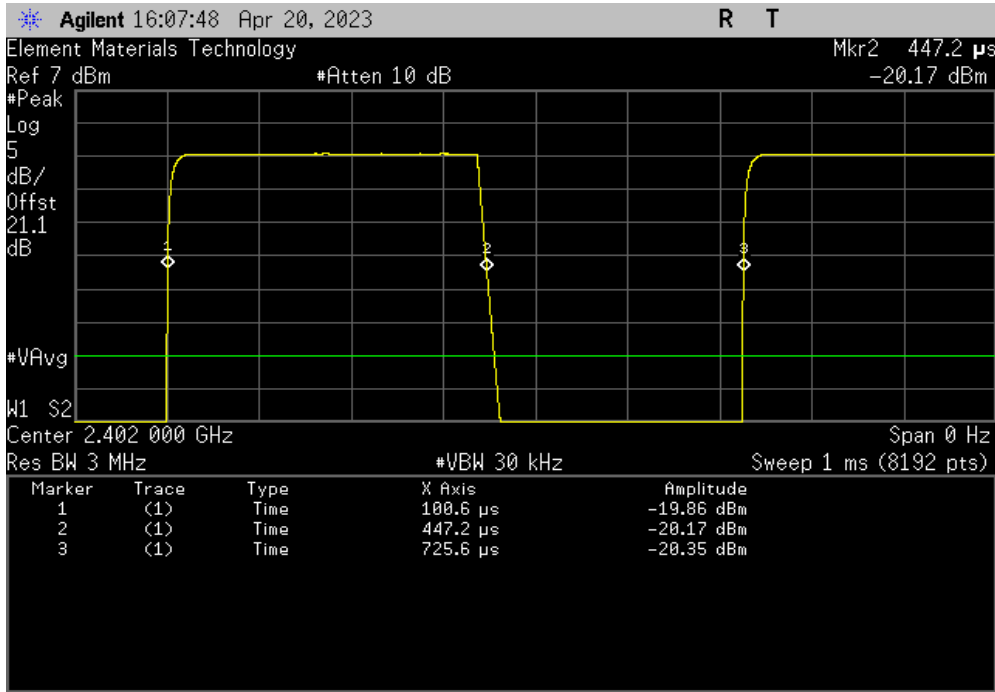

BLE/GFSK 1 Mbps Low Channel, 2402 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

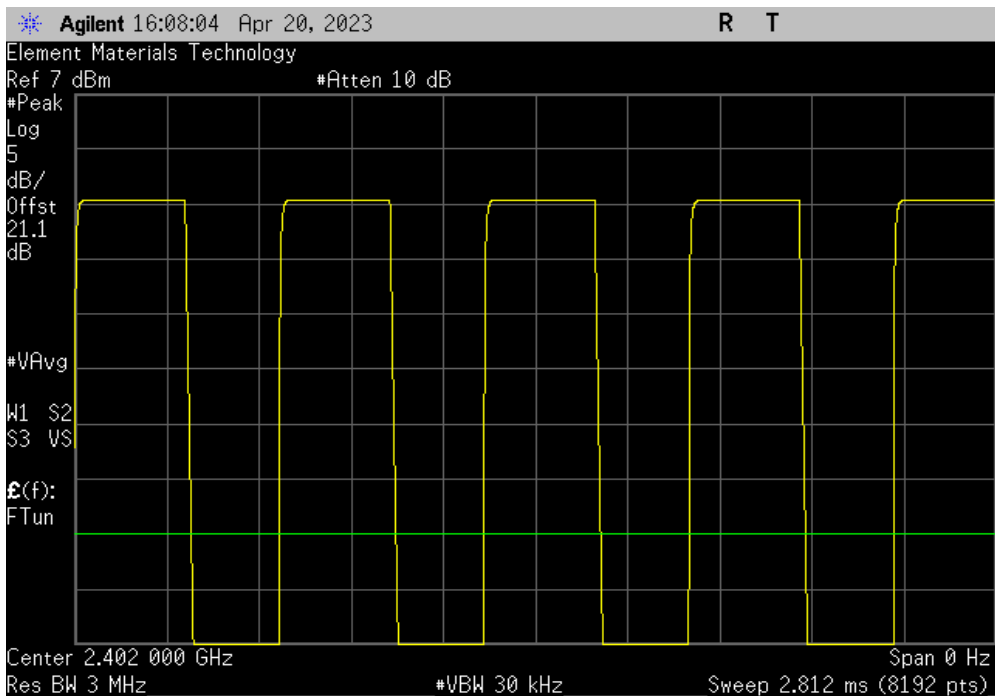


# DUTY CYCLE




TbTx 2022.06.03.0 XMI 2023.02.14.0

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
346.46 us	625.1 us	1	55.4	N/A	N/A	

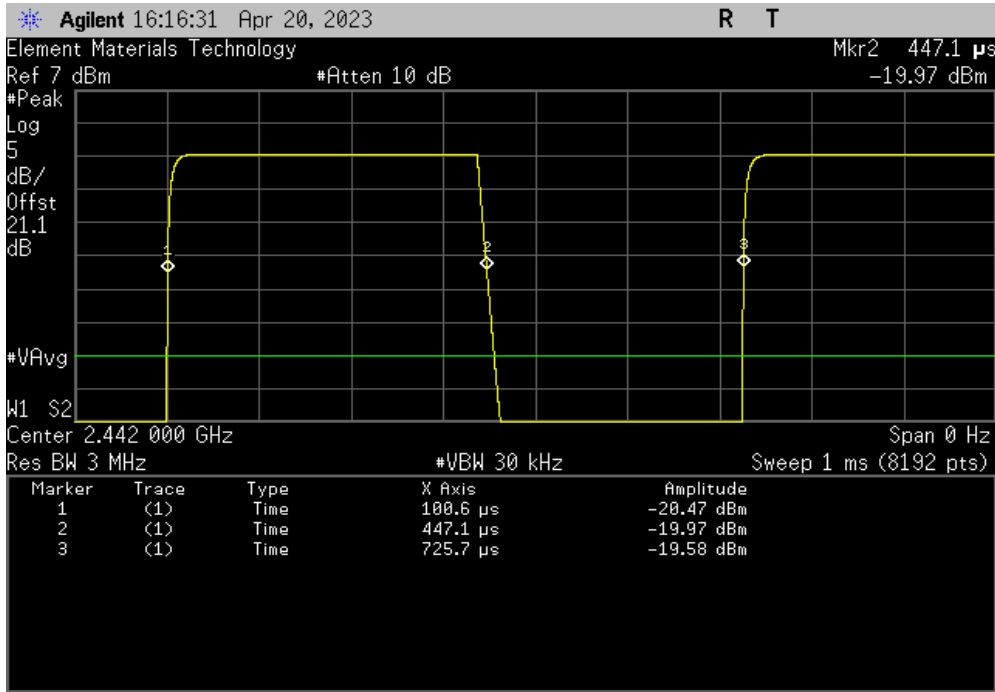

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

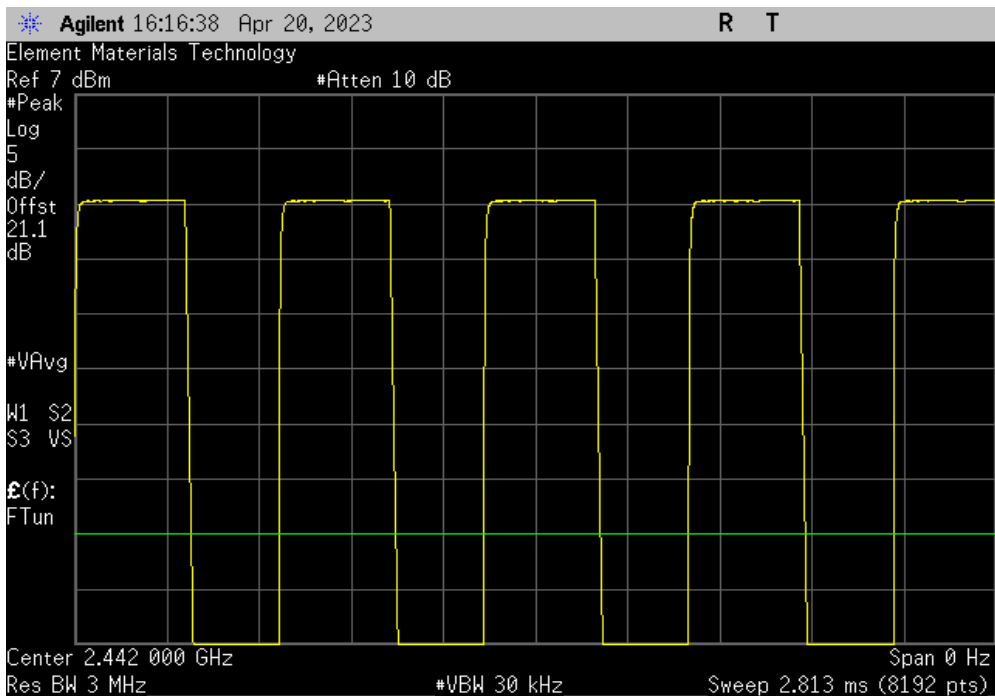




# DUTY CYCLE




TbTx 2022.06.03.0 XMI 2023.02.14.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
346.76 us	625 us	1	55.5	N/A	N/A	

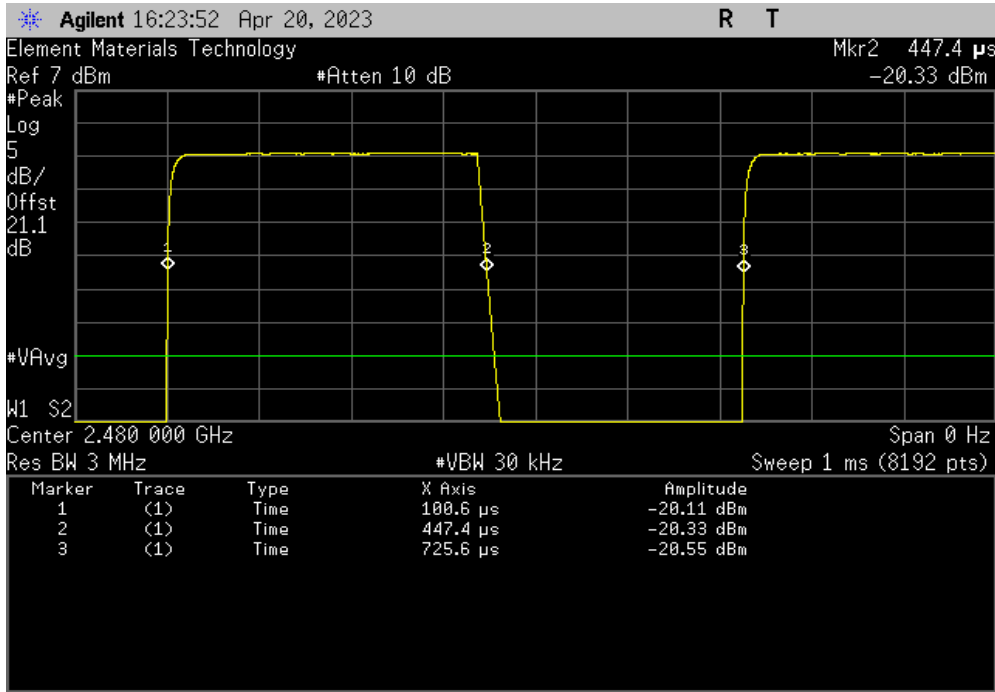

BLE/GFSK 1 Mbps High Channel, 2480 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

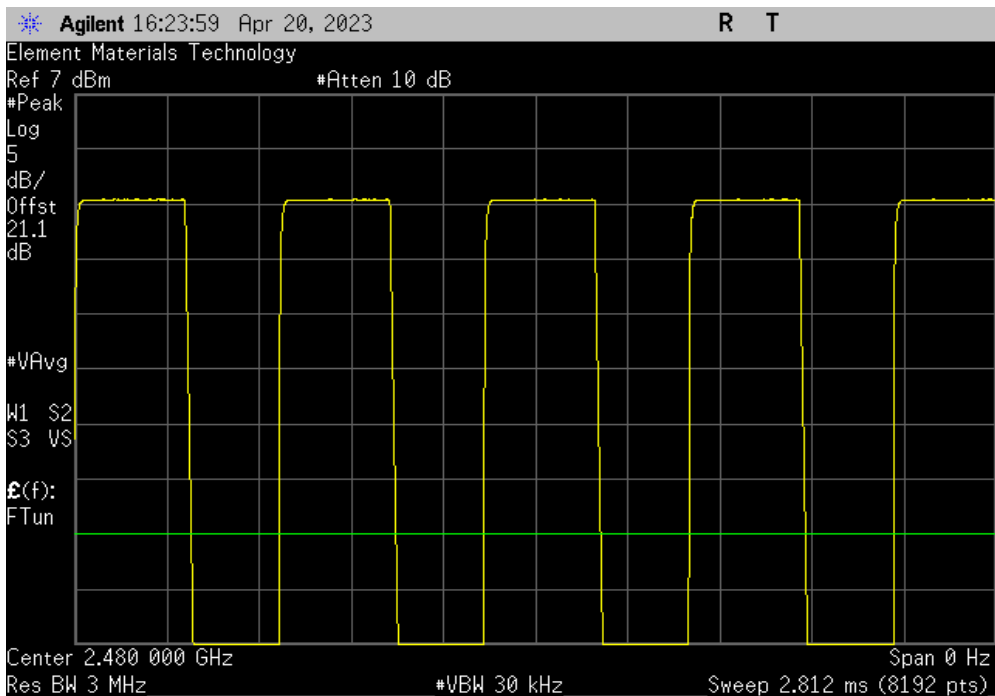

# DTS BANDWIDTH (6 dB)



XMIT 2023.02.14.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAT	2022-11-03	2023-11-03
Cable	Micro-Coax	UFD150A-1-0720-200200	NCW	2023-01-18	2024-01-18
Generator - Signal	Agilent	N5183A	TIA	2022-06-25	2024-06-25
Attenuator	Fairview Microwave	SA4014-20	QAA	2023-02-17	2024-02-17
Block - DC	Weinschel Corp.	7006	AMS	2023-01-18	2024-01-18

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.


The EUT was set to the channels and modes listed in the datasheet.

The 6dB DTS bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

# DTS BANDWIDTH (6 dB)



TbTx 2022.06.03.0 XMt 2023.02.14.0


EUT: IDQXMOD1		Work Order: SMTE0005	
Serial Number: Sample 1		Date: 04/20/2023	
Customer: SMART Technologies		Temperature: 23°C	
Attendees: Sean MacKellar		Humidity: 42.3%	
Project: None		Barometric Pres.: 1020 mbar	
Tested by: Harry Zhao		Job Site: NC06	
Power: Power over USB			
<b>TEST SPECIFICATIONS</b>			
		<b>Test Method</b>	
FCC 15.247:2023		ANSI C63.10:2013	
RSS-247 Issue 2:2017		ANSI C63.10:2013	
RSS-Gen Issue 5:2018+A1:2019+A2:2021		ANSI C63.10:2013	
<b>COMMENTS</b>			
Reference level offset: DC Block, 20 dB attenuator, UFL-to-SMA cable, and measurement cable			
<b>DEVIATIONS FROM TEST STANDARD</b>			
None			
Configuration #	6	Signature 	
		<b>Value</b>	<b>Limit (±)</b>
BLE/GFSK 1 Mbps Low Channel, 2402 MHz		669.783 kHz	500 kHz
BLE/GFSK 1 Mbps Mid Channel, 2442 MHz		691.526 kHz	500 kHz
BLE/GFSK 1 Mbps High Channel, 2480 MHz		721.638 kHz	500 kHz
			<b>Result</b>
			Pass
			Pass
			Pass

# DTS BANDWIDTH (6 dB)




TuTx 2022.06.03.0 XMI 2023.02.14.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz			
	Value	Limit (≥)	Result
	669.783 kHz	500 kHz	Pass

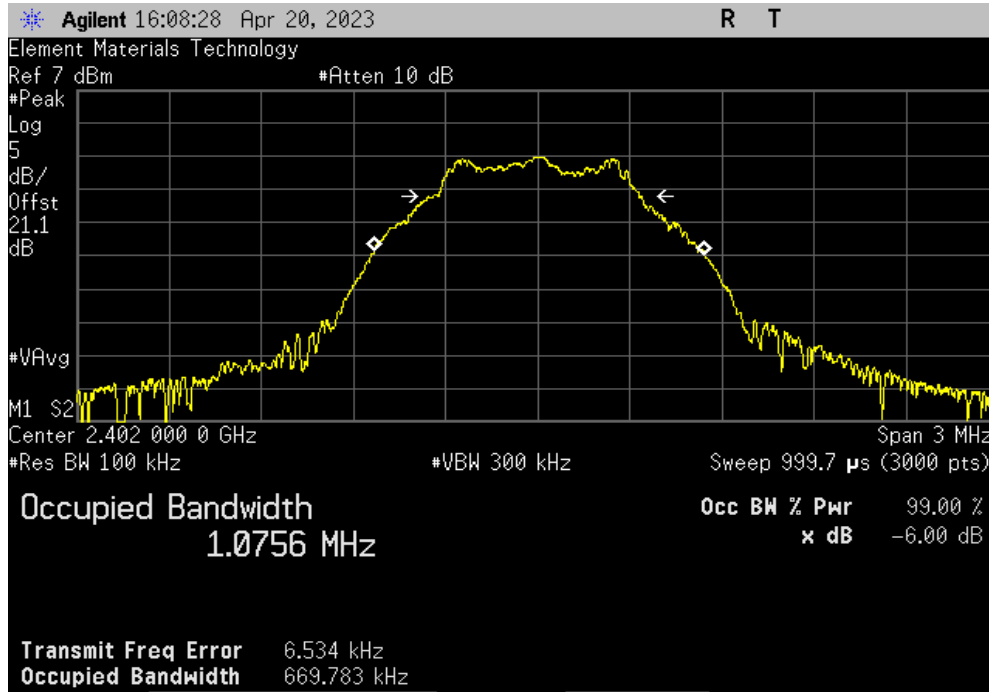

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz			
	Value	Limit (≥)	Result
	691.526 kHz	500 kHz	Pass

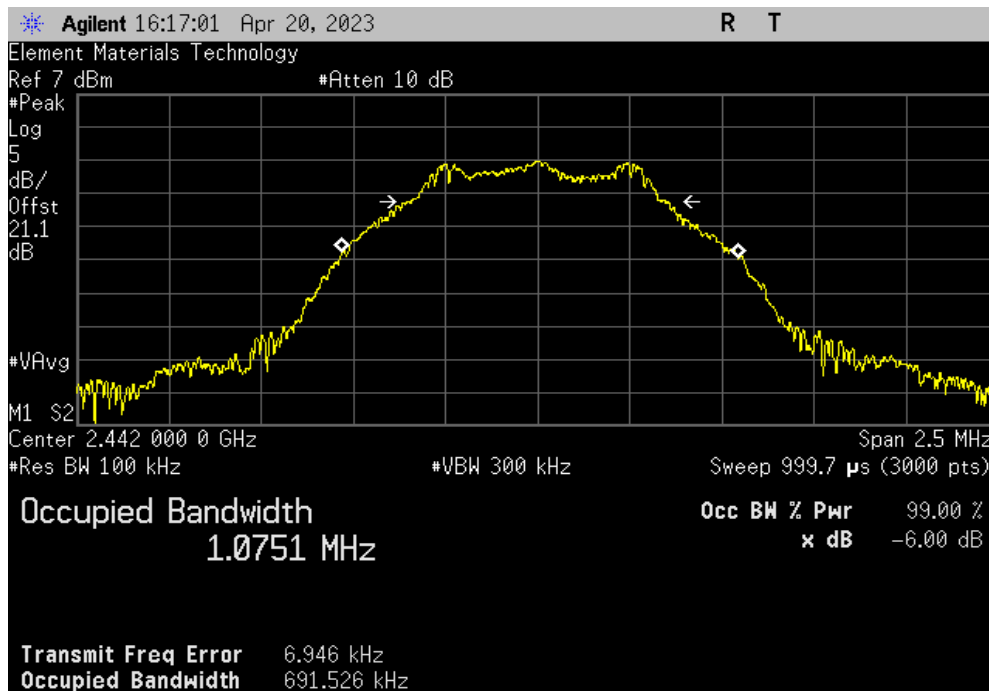


# DTS BANDWIDTH (6 dB)



TbTx 2022.06.03.0 XMt 2023.02.14.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz		
Value	Limit	Result
721.638 kHz	500 kHz	Pass

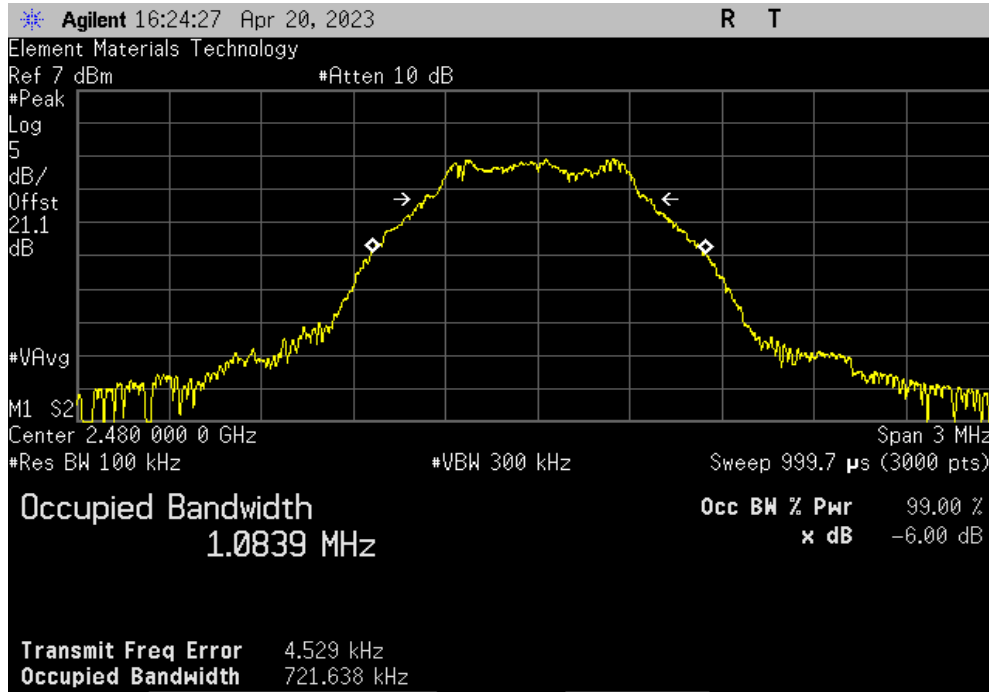

# SPURIOUS RADIATED EMISSIONS



## TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequencies and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These “pre-scans” are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis if required, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

- QP = Quasi-Peak Detector
- PK = Peak Detector
- AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out of band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Measurements within 2 MHz of the allowable band may have been taken using the integration method from ANSI C63.10 clause 11.13.3. This procedure uses the channel power feature of the spectrum analyzer to integrate the power of the emission within a 1 MHz bandwidth.

Where the radio test software does not provide for a duty cycle at continuous transmit conditions (> 98%) and the RMS (power average) measurements were made across the on and off times of the EUT transmissions, a duty cycle correction is added to the measurements using the formula of  $10 \cdot \log(1/dc)$ .

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Antenna - Double Ridge	EMCO	3115	AHM	2022-07-13	2024-07-13
Cable	Northwest EMC	3115 Horn Cable	NC2	2022-04-14	2023-04-14
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVZ	2022-04-14	2023-04-14
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAT	2022-11-03	2023-11-03
Antenna - Standard Gain	EMCO	3160-07	AHP	NCR	NCR
Cable	High Speed Interconnects	EW292A-NGNG-300	NC3	2022-08-30	2023-08-30
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AOK	2022-08-04	2023-08-04
Antenna - Standard Gain	EMCO	3160-08	AHO	NCR	NCR
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AOJ	2022-08-04	2023-08-04
Filter - High Pass	Micro-Tronics	HPM50111	HHI	2022-10-03	2023-10-03
Attenuator	Fairview Microwave	SA18E-20	AQV	2022-07-28	2023-07-28
Filter - Low Pass	Micro-Tronics	LPM50004	LFF	2022-11-01	2023-11-01
Cable	Northwest EMC	Bilog Cables	NC1	2023-01-29	2024-01-29
Antenna - Biconilog	Teseq	CBL 6141B	AYL	2021-10-05	2023-10-05
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	PAB	2023-01-29	2024-01-29
Antenna - Standard Gain	ETS Lindgren	3160-09	AIY	NCR	NCR
Amplifier - Pre-Amplifier	Miteq	AMF-6F-18002650-25-10P	AOD	2022-03-21	2023-03-21
Cable	Northwest EMC	N/A	NC8	2022-03-21	2023-03-21

## MEASUREMENT UNCERTAINTY

Description		
Expanded k=2	5.2 dB	-5.2 dB

## FREQUENCY RANGE INVESTIGATED

30 MHz TO 26.5 GHz

## POWER INVESTIGATED

Power over USB

# SPURIOUS RADIATED EMISSIONS



## CONFIGURATIONS INVESTIGATED

---

SMTE0005-2

---

## MODES INVESTIGATED

---

Transmitting BLE, Low Channel 0 = 2402 MHz, Middle Channel 20 = 2442 MHz, High Channel 39 = 2480 MHz, 1 Mbps,  
Power transmission at 0 dBm

---

# SPURIOUS RADIATED EMISSIONS



EUT:	IDQXMOD1	Work Order:	SMTE0005
Serial Number:	Sample 1	Date:	2023-02-28
Customer:	SMART Technologies ULC	Temperature:	20.9°C
Attendees:	Sean MacKellar	Relative Humidity:	31%
Customer Project:	None	Bar. Pressure (PMSL):	1001 mb
Tested By:	Harry Zhao	Job Site:	NC01
Power:	Power over USB	Configuration:	SMTE0005-2

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.247:2023	ANSI C63.10:2013
RSS-247 Issue 2:2017	ANSI C63.10:2013
RSS-Gen Issue 5:2018+A1:2019+A2:2021	ANSI C63.10:2013

## TEST PARAMETERS

Run #:	63	Test Distance (m):	3	Ant. Height(s) (m):	1 to 4(m)
--------	----	--------------------	---	---------------------	-----------

## COMMENTS


Tool Sense Board/Module (Backup board-different LC matching). The test mode operates at 54.0% duty cycle (DC). An upward duty cycle correction factor (DCCF) of  $10 \cdot \log(1/DC) = 10 \cdot \log(1/0.54) = 2.676$  dB was applied to the RMS average measurements. When in actual operation, the max operating duty cycle is 7.50%. A downward DCCF correction applied based on  $10 \cdot \log(1/0.0750) = -11.249$  dB was applied to the average measurements. Total correction applied = -8.573 dB. See data comments below for EUT orientation, and channel.

## EUT OPERATING MODES

Transmitting BLE, Low Channel 0 = 2402 MHz, Middle Channel 20 = 2442 MHz, High Channel 39 = 2480 MHz, 1 Mbps, Power transmission at 0 dBm

## DEVIATIONS FROM TEST STANDARD

None

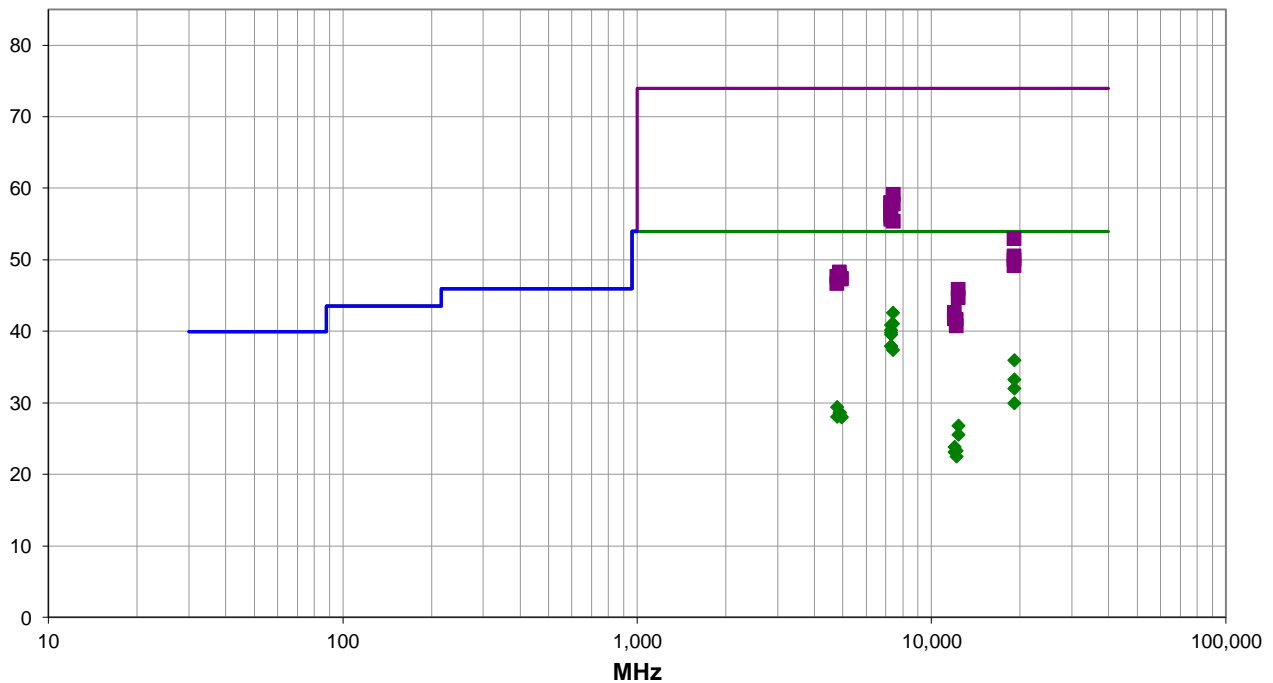

Run #: 63

■ PK    ◆ AV    ● QP



# SPURIOUS RADIATED EMISSIONS

## RESULTS - Run #63

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor	External Attenuation (dB)	Polarity/Transducer	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
7439.458	36.1	15.1	2.8	51.0	-8.6	0.0	Horz	AV	0.0	42.6	54.0	-11.4	Ch. 39, EUT in Z-axis
7439.467	34.5	15.1	1.4	203.0	-8.6	0.0	Vert	AV	0.0	41.0	54.0	-13.0	Ch. 39, EUT in X-axis
7325.433	35.0	14.5	2.3	50.0	-8.6	0.0	Horz	AV	0.0	40.9	54.0	-13.1	Ch. 20, EUT in Z-axis
7325.417	34.2	14.5	3.3	60.0	-8.6	0.0	Vert	AV	0.0	40.1	54.0	-13.9	Ch. 20, EUT in X-axis
7325.492	33.9	14.5	2.8	309.0	-8.6	0.0	Horz	AV	0.0	39.8	54.0	-14.2	Ch. 20, EUT in Y-axis
7325.442	33.6	14.5	1.5	114.0	-8.6	0.0	Vert	AV	0.0	39.5	54.0	-14.5	Ch. 20, EUT in Y-axis
7440.633	44.0	15.1	2.8	51.0	0.0	0.0	Horz	PK	0.0	59.1	74.0	-14.9	Ch. 39, EUT in Z-axis
7325.467	32.0	14.5	1.4	96.0	-8.6	0.0	Horz	AV	0.0	37.9	54.0	-16.1	Ch. 20, EUT in X-axis
7325.425	32.0	14.5	1.5	133.0	-8.6	0.0	Vert	AV	0.0	37.9	54.0	-16.1	Ch. 20, EUT in Z-axis
7326.058	43.4	14.5	3.3	60.0	0.0	0.0	Vert	PK	0.0	57.9	74.0	-16.1	Ch. 20, EUT in X-axis
7325.075	43.4	14.5	2.3	50.0	0.0	0.0	Horz	PK	0.0	57.9	74.0	-16.1	Ch. 20, EUT in Z-axis
7440.408	42.6	15.1	1.4	203.0	0.0	0.0	Vert	PK	0.0	57.7	74.0	-16.3	Ch. 39, EUT in X-axis
7439.375	30.9	15.1	1.5	279.0	-8.6	0.0	Horz	AV	0.0	37.4	54.0	-16.6	Ch. 39, EUT in X-axis
7325.325	42.7	14.5	2.8	309.0	0.0	0.0	Horz	PK	0.0	57.2	74.0	-16.8	Ch. 20, EUT in Y-axis
7325.483	41.9	14.5	1.5	114.0	0.0	0.0	Vert	PK	0.0	56.4	74.0	-17.6	Ch. 20, EUT in Y-axis
7325.425	41.5	14.5	1.4	96.0	0.0	0.0	Horz	PK	0.0	56.0	74.0	-18.0	Ch. 20, EUT in X-axis
19214.240	44.2	0.3	1.5	298.0	-8.6	0.0	Vert	AV	0.0	35.9	54.0	-18.1	Ch. 0, EUT in Z-axis
7326.017	41.1	14.5	1.5	133.0	0.0	0.0	Vert	PK	0.0	55.6	74.0	-18.4	Ch. 20, EUT in Z-axis
7440.242	40.2	15.1	1.5	279.0	0.0	0.0	Horz	PK	0.0	55.3	74.0	-18.7	Ch. 39, EUT in X-axis
19214.120	41.5	0.3	1.5	181.0	-8.6	0.0	Vert	AV	0.0	33.2	54.0	-20.8	Ch. 0, EUT in X-axis
19214.210	52.6	0.3	1.5	298.0	0.0	0.0	Vert	PK	0.0	52.9	74.0	-21.1	Ch. 0, EUT in Z-axis
19214.270	40.3	0.3	1.5	185.0	-8.6	0.0	Horz	AV	0.0	32.0	54.0	-22.0	Ch. 0, EUT in X-axis
19214.020	50.2	0.3	1.5	181.0	0.0	0.0	Vert	PK	0.0	50.5	74.0	-23.5	Ch. 0, EUT in X-axis
19214.310	38.2	0.3	1.5	185.0	-8.6	0.0	Horz	AV	0.0	29.9	54.0	-24.1	Ch. 0, EUT in Z-axis
19215.800	49.6	0.3	1.5	185.0	0.0	0.0	Horz	PK	0.0	49.9	74.0	-24.1	Ch. 0, EUT in X-axis
4803.908	28.3	9.7	2.8	124.0	-8.6	0.0	Horz	AV	0.0	29.4	54.0	-24.6	Ch. 0, EUT in Z-axis
19214.380	48.8	0.3	1.5	185.0	0.0	0.0	Horz	PK	0.0	49.1	74.0	-24.9	Ch. 0, EUT in Z-axis
4884.050	27.2	10.1	1.5	204.0	-8.6	0.0	Horz	AV	0.0	28.7	54.0	-25.3	Ch. 20, EUT in Z-axis
4883.925	27.1	10.1	2.4	6.0	-8.6	0.0	Vert	AV	0.0	28.6	54.0	-25.4	Ch. 20, EUT in X-axis
4883.000	38.1	10.1	2.4	6.0	0.0	0.0	Vert	PK	0.0	48.2	74.0	-25.8	Ch. 20, EUT in X-axis
4959.667	26.6	10.0	2.5	32.0	-8.6	0.0	Vert	AV	0.0	28.0	54.0	-26.0	Ch. 39, EUT in X-axis
4803.133	26.9	9.7	1.5	213.0	-8.6	0.0	Vert	AV	0.0	28.0	54.0	-26.0	Ch. 0, EUT in X-axis
4959.583	26.5	10.0	1.5	301.0	-8.6	0.0	Horz	AV	0.0	27.9	54.0	-26.1	Ch. 39, EUT in Z-axis
4885.233	37.6	10.1	1.5	204.0	0.0	0.0	Horz	PK	0.0	47.7	74.0	-26.3	Ch. 20, EUT in Z-axis
4804.067	37.9	9.7	2.8	124.0	0.0	0.0	Horz	PK	0.0	47.6	74.0	-26.4	Ch. 0, EUT in Z-axis
4961.500	37.3	10.0	2.5	32.0	0.0	0.0	Vert	PK	0.0	47.3	74.0	-26.7	Ch. 39, EUT in X-axis
4958.908	37.2	10.0	1.5	301.0	0.0	0.0	Horz	PK	0.0	47.2	74.0	-26.8	Ch. 39, EUT in Z-axis
12401.040	33.5	1.9	1.4	214.0	-8.6	0.0	Horz	AV	0.0	26.8	54.0	-27.2	Ch. 39, EUT in Z-axis
4804.275	36.9	9.7	1.5	213.0	0.0	0.0	Vert	PK	0.0	46.6	74.0	-27.4	Ch. 0, EUT in X-axis
12400.680	43.9	1.9	1.4	214.0	0.0	0.0	Horz	PK	0.0	45.8	74.0	-28.2	Ch. 39, EUT in Z-axis
12400.910	32.2	1.9	1.5	109.0	-8.6	0.0	Vert	AV	0.0	25.5	54.0	-28.5	Ch. 39, EUT in X-axis
12400.210	42.7	1.9	1.5	109.0	0.0	0.0	Vert	PK	0.0	44.6	74.0	-29.4	Ch. 39, EUT in X-axis
12008.890	35.1	-2.7	2.9	265.0	-8.6	0.0	Horz	AV	0.0	23.8	54.0	-30.2	Ch. 0, EUT in Z-axis

# SPURIOUS RADIATED EMISSIONS

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor	External Attenuation (dB)	Polarity/Transducer	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
12208.930	34.0	-2.1	2.8	232.0	-8.6	0.0	Horz	AV	0.0	23.3	54.0	-30.7	Ch. 20, EUT in Z-axis
12009.000	34.4	-2.7	3.8	60.0	-8.6	0.0	Vert	AV	0.0	23.1	54.0	-30.9	Ch. 0, EUT in X-axis
12008.920	45.3	-2.7	2.9	265.0	0.0	0.0	Horz	PK	0.0	42.6	74.0	-31.4	Ch. 0, EUT in Z-axis
12208.890	33.2	-2.1	3.9	24.0	-8.6	0.0	Vert	AV	0.0	22.5	54.0	-31.5	Ch. 20, EUT in X-axis
12008.840	44.4	-2.7	3.8	60.0	0.0	0.0	Vert	PK	0.0	41.7	74.0	-32.3	Ch. 0, EUT in X-axis
12211.380	43.7	-2.1	2.8	232.0	0.0	0.0	Horz	PK	0.0	41.6	74.0	-32.4	Ch. 20, EUT in Z-axis
12209.490	42.8	-2.1	3.9	24.0	0.0	0.0	Vert	PK	0.0	40.7	74.0	-33.3	Ch. 20, EUT in X-axis

## CONCLUSION

Pass



Tested By

# SPURIOUS RADIATED EMISSIONS



EUT:	IDQXMOD1	Work Order:	SMTE0005
Serial Number:	Sample 1	Date:	2023-03-01
Customer:	SMART Technologies ULC	Temperature:	20.7°C
Attendees:	Sean MacKellar	Relative Humidity:	32.3%
Customer Project:	None	Bar. Pressure (PMSL):	1016 mb
Tested By:	Harry Zhao	Job Site:	NC01
Power:	Power over USB	Configuration:	SMTE0005-2

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.247:2023	ANSI C63.10:2013
RSS-247 Issue 2:2017	ANSI C63.10:2013
RSS-Gen Issue 5:2018+A1:2019+A2:2021	ANSI C63.10:2013

## TEST PARAMETERS

Run #:	64	Test Distance (m):	3	Ant. Height(s) (m):	1 to 4(m)
--------	----	--------------------	---	---------------------	-----------

## COMMENTS


Tool Sense Board/Module. The test mode operates at 54.0% duty cycle (DC). An upward duty cycle correction factor (DCCF) of  $10 \cdot \log(1/DC) = 10 \cdot \log(1/0.54) = 2.676$  dB was applied to the RMS average measurements. When in actual operation, the max operating duty cycle is 7.50%. A downward DCCF correction applied based on  $10 \cdot \log(1/0.0750) = -11.249$  dB was applied to the average measurements. Total correction applied = -8.573 dB. See data comments below for EUT orientation, and channel.

## EUT OPERATING MODES

Transmitting BLE, Low Channel 0 = 2402 MHz, Middle Channel 20 = 2442 MHz, High Channel 39 = 2480 MHz, 1 Mbps, TX power at 0 dBm

## DEVIATIONS FROM TEST STANDARD

None

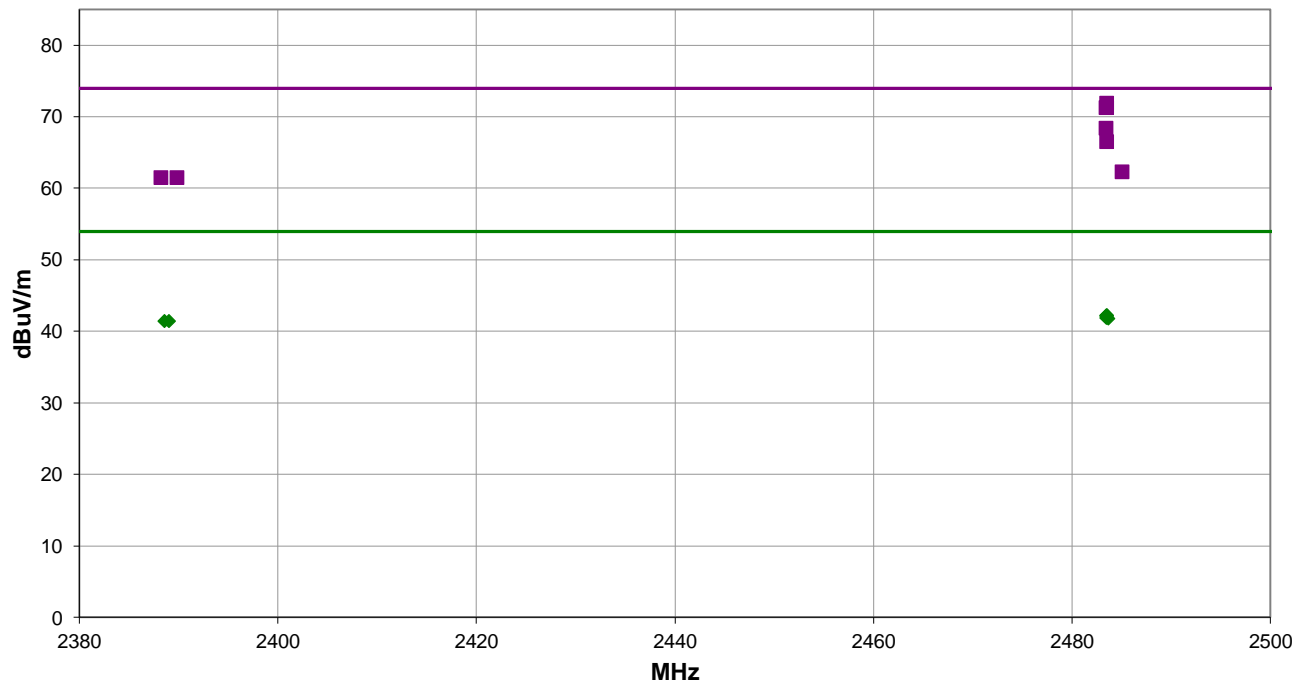

Run #: 64

■ PK    ◆ AV    ● QP

# SPURIOUS RADIATED EMISSIONS

## RESULTS - Run #64

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor	External Attenuation (dB)	Polarity/Transducer	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2483.560	50.6	1.2	1.7	358.0	0.0	20.0	Horz	PK	0.0	71.8	74.0	-2.2	Ch. 39, EUT in the X-axis
2483.540	50.0	1.2	4.0	95.0	0.0	20.0	Vert	PK	0.0	71.2	74.0	-2.8	Ch. 39, EUT in the Z-axis
2483.513	50.0	1.2	1.5	25.0	0.0	20.0	Horz	PK	0.0	71.2	74.0	-2.8	Ch. 39, EUT in the Y-axis
2483.510	47.1	1.2	3.3	270.0	0.0	20.0	Vert	PK	0.0	68.3	74.0	-5.7	Ch. 39, EUT in the Y-axis
2483.537	45.2	1.2	3.7	91.0	0.0	20.0	Vert	PK	0.0	66.4	74.0	-7.6	Ch. 39, EUT in the X-axis
2483.523	29.6	1.2	4.0	95.0	-8.6	20.0	Vert	AV	0.0	42.2	54.0	-11.8	Ch. 39, EUT in the Z-axis
2483.543	29.6	1.2	1.5	25.0	-8.6	20.0	Horz	AV	0.0	42.2	54.0	-11.8	Ch. 39, EUT in the Y-axis
2485.103	41.0	1.2	1.5	298.0	0.0	20.0	Horz	PK	0.0	62.2	74.0	-11.8	Ch. 39, EUT in the Z-axis
2483.507	29.5	1.2	1.7	358.0	-8.6	20.0	Horz	AV	0.0	42.1	54.0	-11.9	Ch. 39, EUT in the X-axis
2483.537	29.3	1.2	3.3	270.0	-8.6	20.0	Vert	AV	0.0	41.9	54.0	-12.1	Ch. 39, EUT in the Y-axis
2483.517	29.2	1.2	3.7	91.0	-8.6	20.0	Vert	AV	0.0	41.8	54.0	-12.2	Ch. 39, EUT in the X-axis
2483.693	29.1	1.2	1.5	298.0	-8.6	20.0	Horz	AV	0.0	41.7	54.0	-12.3	Ch. 39, EUT in the Z-axis
2389.047	29.0	1.0	2.9	24.0	-8.6	20.0	Horz	AV	0.0	41.4	54.0	-12.6	Ch. 0, EUT in the X-axis
2388.560	29.0	1.0	1.5	336.0	-8.6	20.0	Vert	AV	0.0	41.4	54.0	-12.6	Ch. 0, EUT in the Z-axis
2388.260	40.4	1.0	2.9	24.0	0.0	20.0	Horz	PK	0.0	61.4	74.0	-12.6	Ch. 0, EUT in the X-axis
2389.903	40.4	1.0	1.5	336.0	0.0	20.0	Vert	PK	0.0	61.4	74.0	-12.6	Ch. 0, EUT in the Z-axis

## CONCLUSION

Pass



Tested By

# OCCUPIED BANDWIDTH (99%)

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Fairview Microwave	SA4014-20	QAA	2023-02-17	2024-02-17
Cable	Micro-Coax	UFD150A-1-0720-200200	NCW	2023-01-18	2024-01-18
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAT	2022-11-03	2023-11-03
Block - DC	Weinschel Corp.	7006	AMS	2023-01-18	2024-01-18
Generator - Signal	Agilent	N5183A	TIA	2022-06-25	2024-06-25

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The 99% occupied bandwidth was measured with the EUT configured for continuous modulated operation.

Per ANSI C63.10:2013, 6.9.3, the spectrum analyzer was configured as follows:

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) of the spectrum analyzer was set to the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) bandwidth was set to at least 3 times the resolution bandwidth. The analyzer sweep time was set to auto to prevent video filtering or averaging. A sample detector was used unless the device was not able to be operated in a continuous transmit mode, in which case a peak detector was used.

The spectrum analyzer occupied bandwidth measurement function was used to sum the power of the transmission in linear terms to obtain the 99% bandwidth.




# OCCUPIED BANDWIDTH (99%)




TbTx 2022.06.03.0 XMI 2023.02.14.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz			
	Value	Limit	Result
	1.046 MHz	N/A	N/A

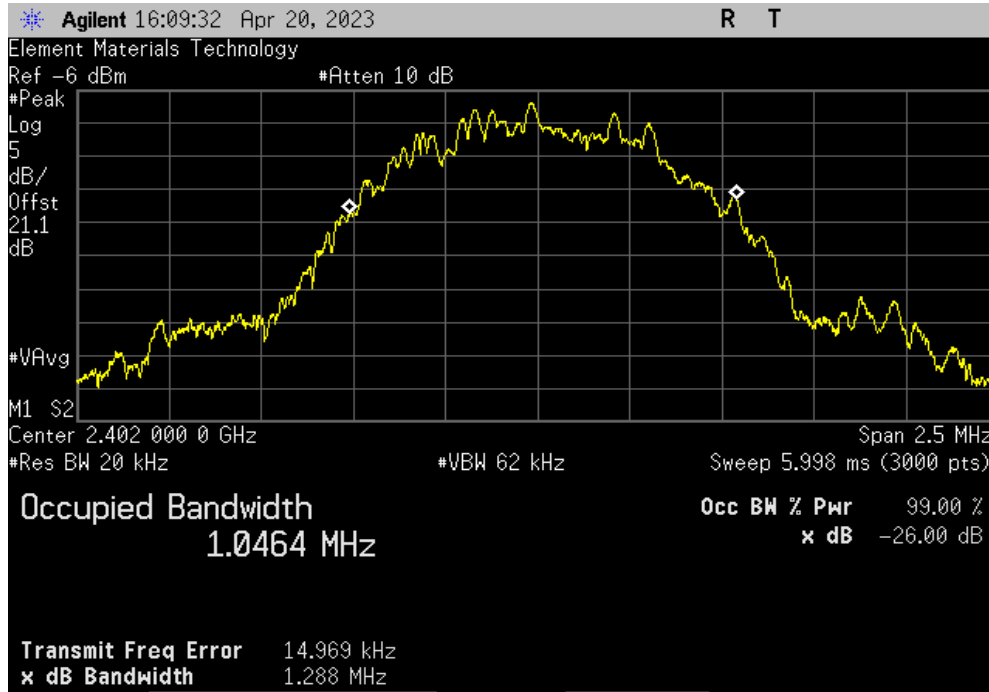

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz			
	Value	Limit	Result
	1.06 MHz	N/A	N/A

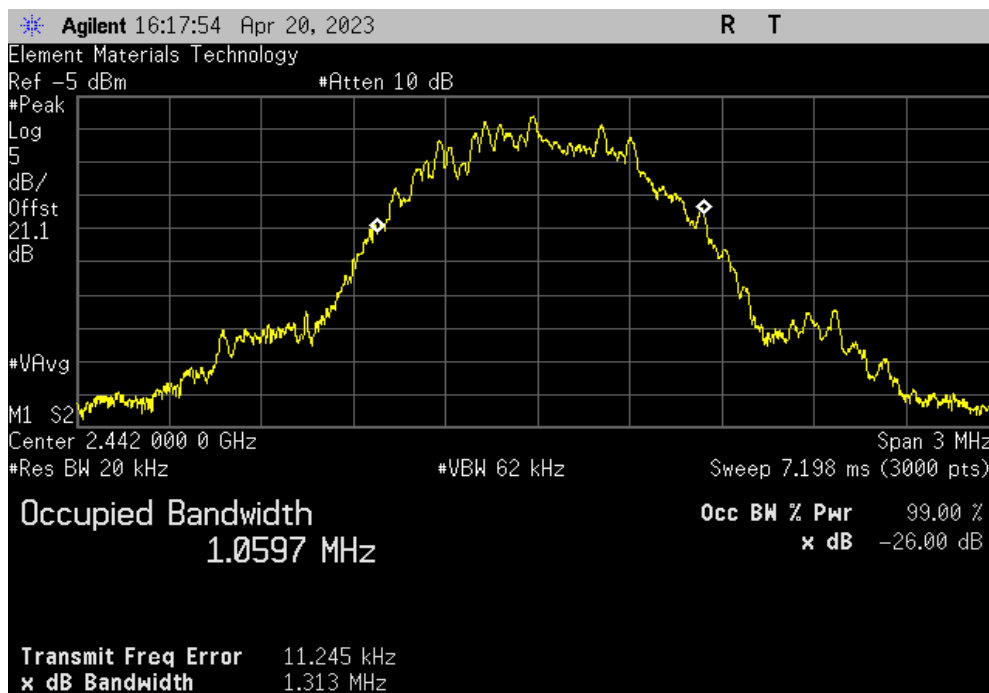


# OCCUPIED BANDWIDTH (99%)



TbTx 2022.06.03.0 XMI 2023.02.14.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz			
	Value	Limit	Result
	1.067 MHz	N/A	N/A

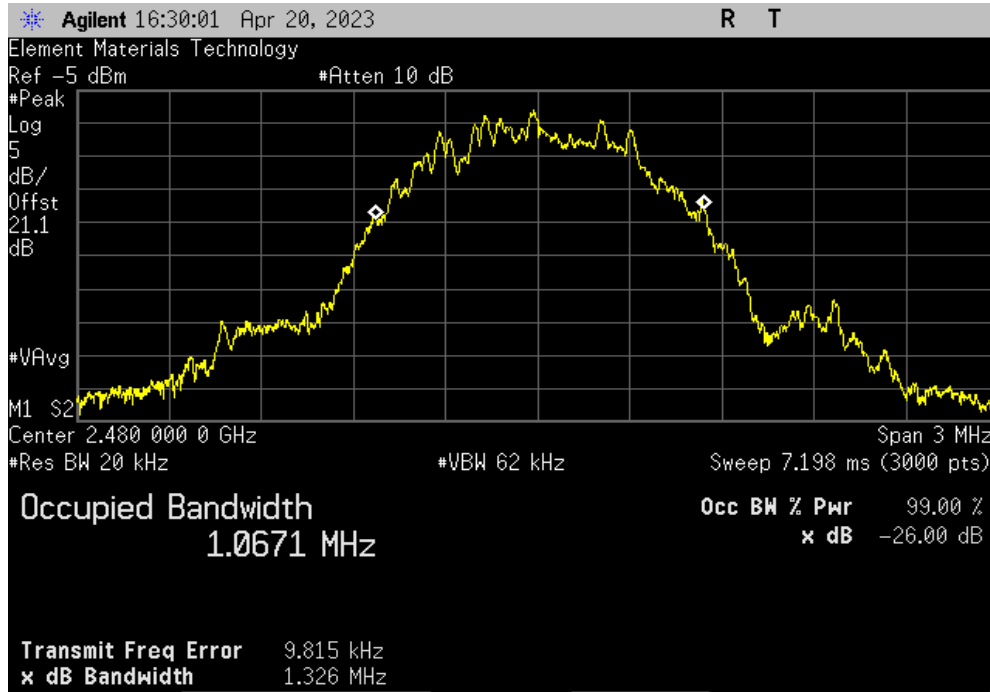



# EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



XMit 2022.12.28.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Block - DC	Weinschel Corp.	7006	AMS	2023-01-18	2024-01-18
Attenuator	Fairview Microwave	SA4014-20	QAA	2023-02-17	2024-02-17
Cable	Micro-Coax	UFD150A-1-0720-200200	NCW	2023-01-18	2024-01-18
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	2023-01-19	2024-01-19
Generator - Signal	Agilent	N5183A	TIA	2022-06-25	2024-06-25

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

Equivalent Isotropic Radiated Power (EIRP) = Max Measured Power + Antenna gain (dBi)




# EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TbTx 2022.06.03.0 XMI 2022.12.28.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz						
	Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
	-1.927	4	2.073	36	Pass	

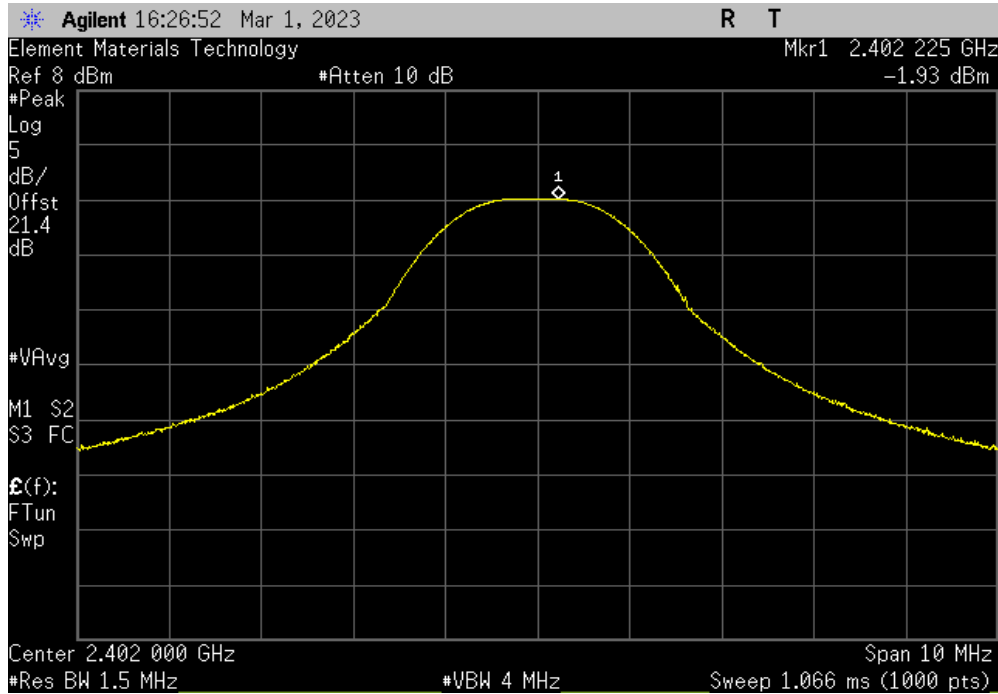

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz						
	Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
	-2.036	4	1.964	36	Pass	

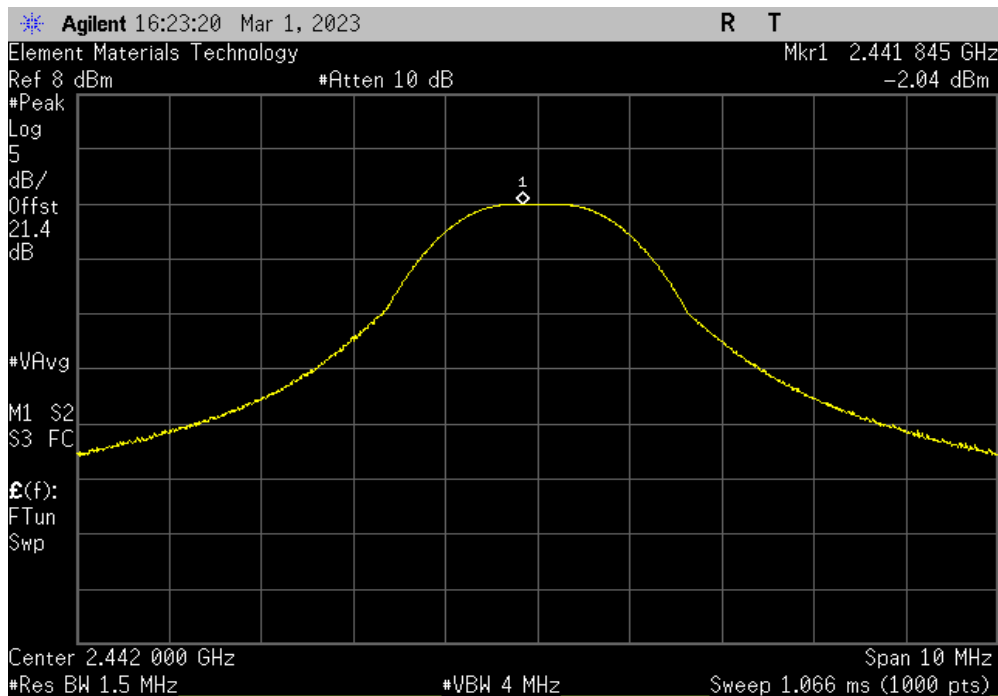


# EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TbTx 2022.06.03.0 XMI 2022.12.28.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz						
	Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
	-1.998	4	2.002	36	Pass	

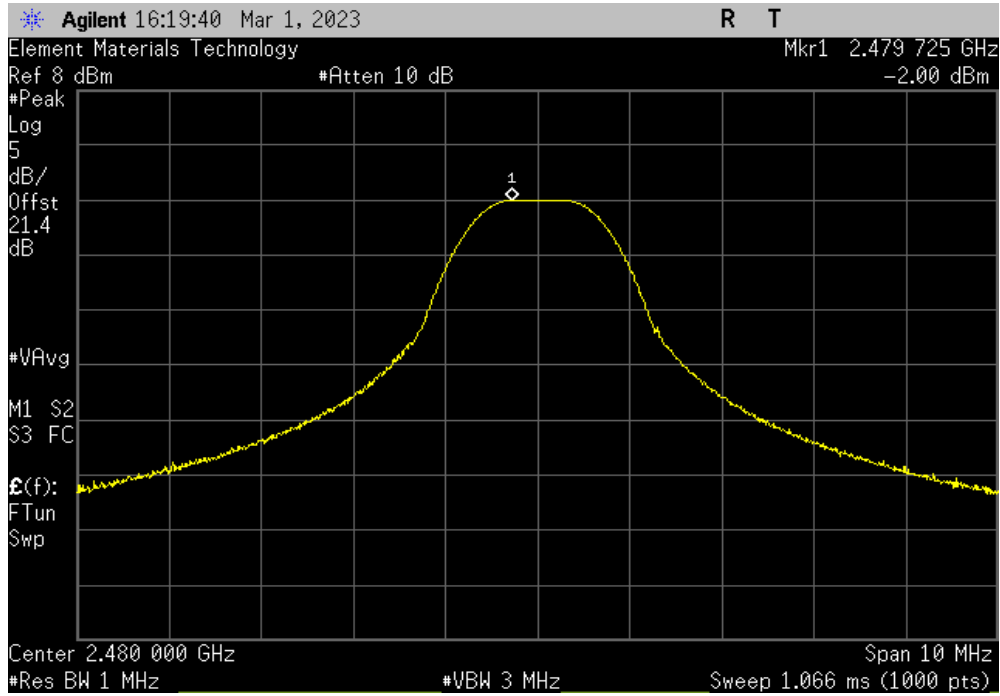

# POWER SPECTRAL DENSITY



XMR 2023.02.14.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Cable	Micro-Coax	UFD150A-1-0720-200200	NCW	2023-01-18	2024-01-18
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAT	2022-11-03	2023-11-03
Generator - Signal	Agilent	N5183A	TIA	2022-06-25	2024-06-25
Block - DC	Weinschel Corp.	7006	AMS	2023-01-18	2024-01-18
Attenuator	Fairview Microwave	SA4014-20	QAA	2023-02-17	2024-02-17

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.


The maximum power spectral density measurements was measured using the channels and modes as called out on the following data sheets.

Per the procedure outlined in ANSI C63.10 the peak power spectral density was measured in a 3 kHz RBW.

# POWER SPECTRAL DENSITY



TbTx 2022.06.03.0 XMit 2023.02.14.0


EUT: IDQXMOD1		Work Order: SMTE0005		
Serial Number: Sample 1		Date: 04/20/23		
Customer: SMART Technologies		Temperature: 23.1°C		
Attendees: Sean MacKellar		Humidity: 42.1%		
Project: None		Barometric Pres.: 1020 mbar		
Tested by: Harry Zhao		Power: Power over USB		
		Job Site: NC06		
TEST SPECIFICATIONS		Test Method		
FCC 15.247:2023		ANSI C63.10:2013		
RSS-247 Issue 2:2017		ANSI C63.10:2013		
RSS-Gen Issue 5:2018+A1:2019+A2:2021		ANSI C63.10:2013		
COMMENTS				
Reference level offset: DC Block, 20 dB attenuator, UFL-to-SMA cable, and measurement cable				
DEVIATIONS FROM TEST STANDARD				
None				
Configuration #	6	Signature 		
		Value	Limit	
		dBm/3kHz	< dBm/3kHz	
BLE/GFSK 1 Mbps Low Channel, 2402 MHz		-17.168	8	Pass
BLE/GFSK 1 Mbps Mid Channel, 2442 MHz		-17.28	8	Pass
BLE/GFSK 1 Mbps High Channel, 2480 MHz		-17.023	8	Pass

# POWER SPECTRAL DENSITY




TuTx 2022.06.03.0 XMI 2023.02.14.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz			
	Value	Limit	Results
	dBm/3kHz	< dBm/3kHz	
	-17.168	8	Pass

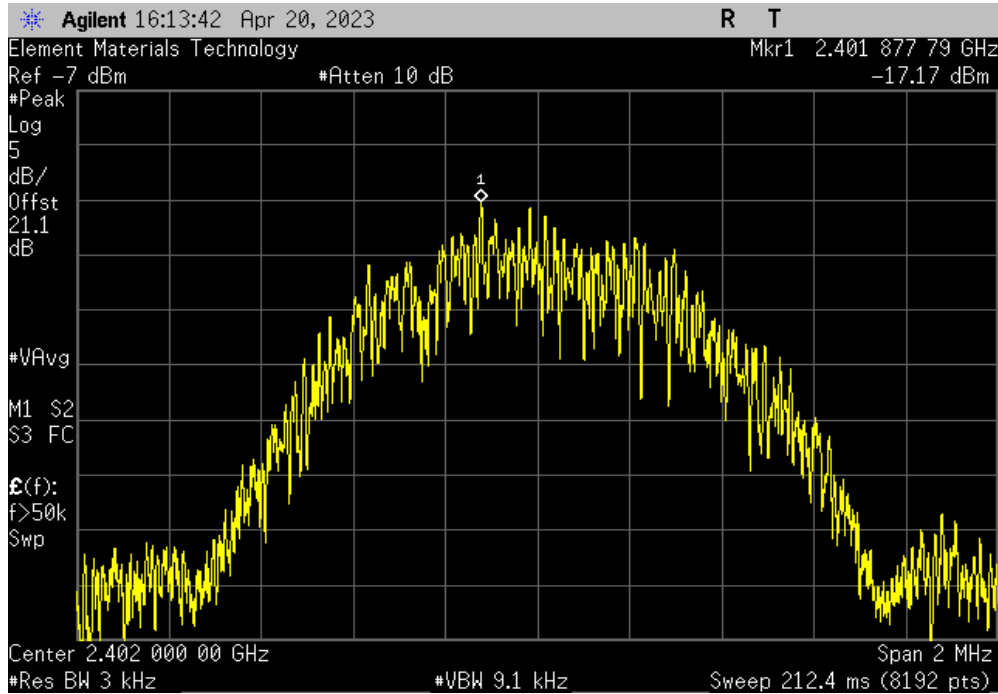

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz			
	Value	Limit	Results
	dBm/3kHz	< dBm/3kHz	
	-17.28	8	Pass

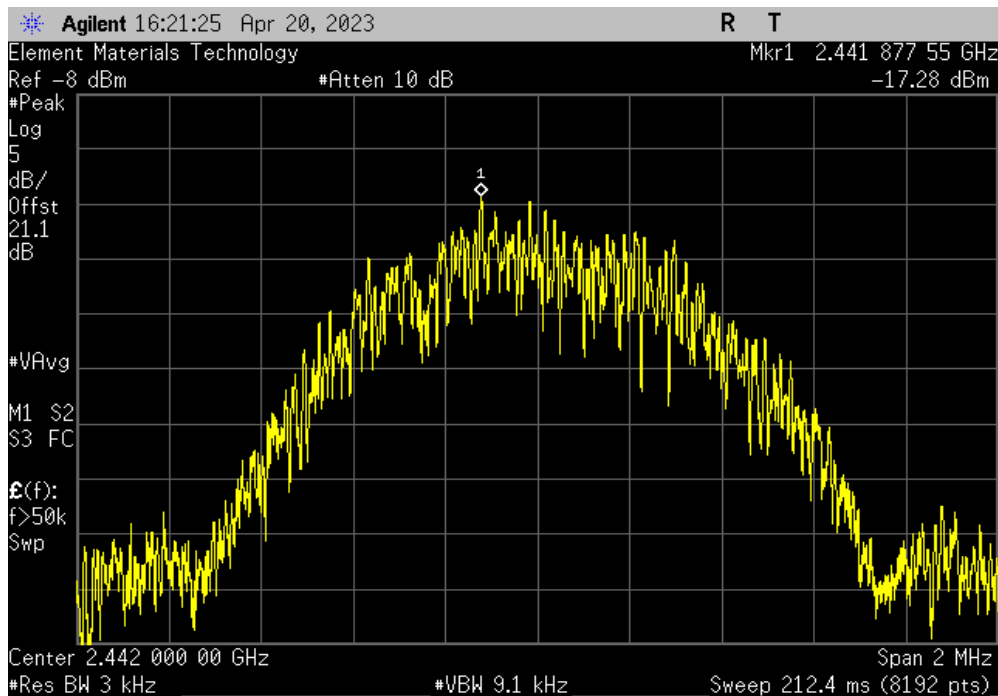


# POWER SPECTRAL DENSITY



TbTx 2022.06.03.0 XMI 2023.02.14.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz			
	Value	Limit	Results
	dBm/3kHz	< dBm/3kHz	
	-17.023	8	Pass

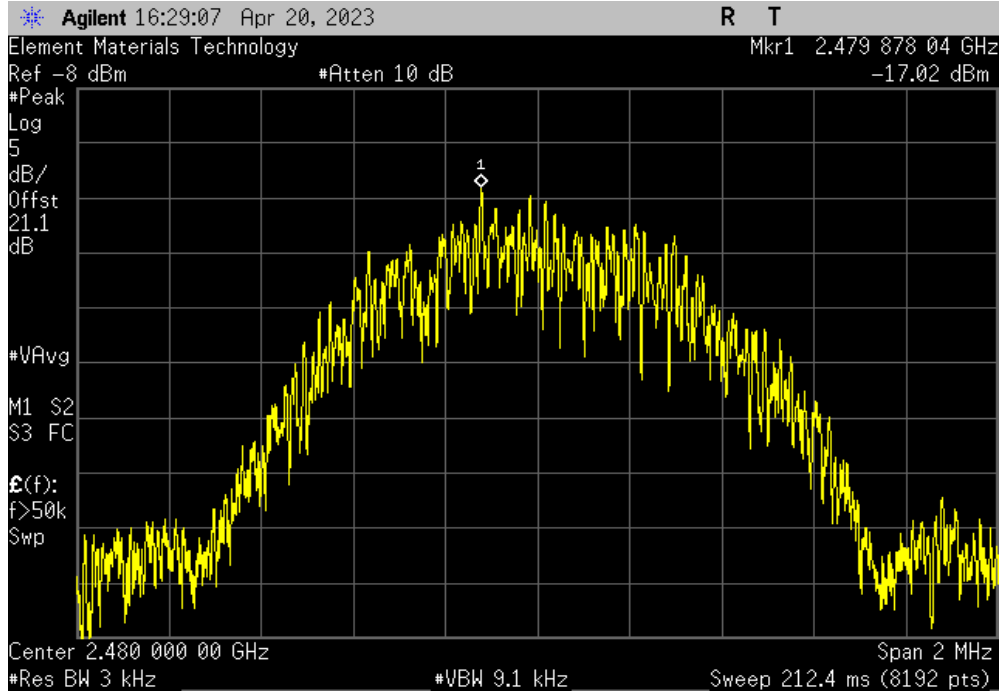





XMit 2023.02.14.0

# BAND EDGE COMPLIANCE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Cable	Micro-Coax	UFD150A-1-0720-200200	NCW	2023-01-18	2024-01-18
Generator - Signal	Agilent	N5183A	TIA	2022-06-25	2024-06-25
Block - DC	Weinschel Corp.	7006	AMS	2023-01-18	2024-01-18
Attenuator	Fairview Microwave	SA4014-20	QAA	2023-02-17	2024-02-17
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAT	2022-11-03	2023-11-03

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.


The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge.

# BAND EDGE COMPLIANCE



THTx 2022.06.03.0 XMI 2023.02.14.0

EUT: IDQXMOD1		Work Order: SMTE0005	
Serial Number: Sample 1		Date: 04/20/2023	
Customer: SMART Technologies		Temperature: 22.1°C	
Attendees: Sean MacKellar		Humidity: 42.9%	
Project: None		Barometric Pres.: 1014 mbar	
Tested by: Harry Zhao		Power: Power over USB	
		Job Site: NC06	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2023		ANSI C63.10:2013	
RSS-247 Issue 2:2017		ANSI C63.10:2013	
RSS-Gen Issue 5:2018+A1:2019+A2:2021		ANSI C63.10:2013	
COMMENTS			
Reference level offset: DC Block, 20 dB attenuator, UFL-to-SMA cable, and measurement cable			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	6	Signature 	
		Value (dBc)	Limit ≤ (dBc) Result
		-38.19	-20 Pass
		-43.04	-20 Pass


BLE/GFSK 1 Mbps Low Channel, 2402 MHz  
 BLE/GFSK 1 Mbps High Channel, 2480 MHz

# BAND EDGE COMPLIANCE




TuTx 2022.06.03.0 XMt 2023.02.14.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz			
	Value (dBc)	Limit ≤ (dBc)	Result
	-38.19	-20	Pass

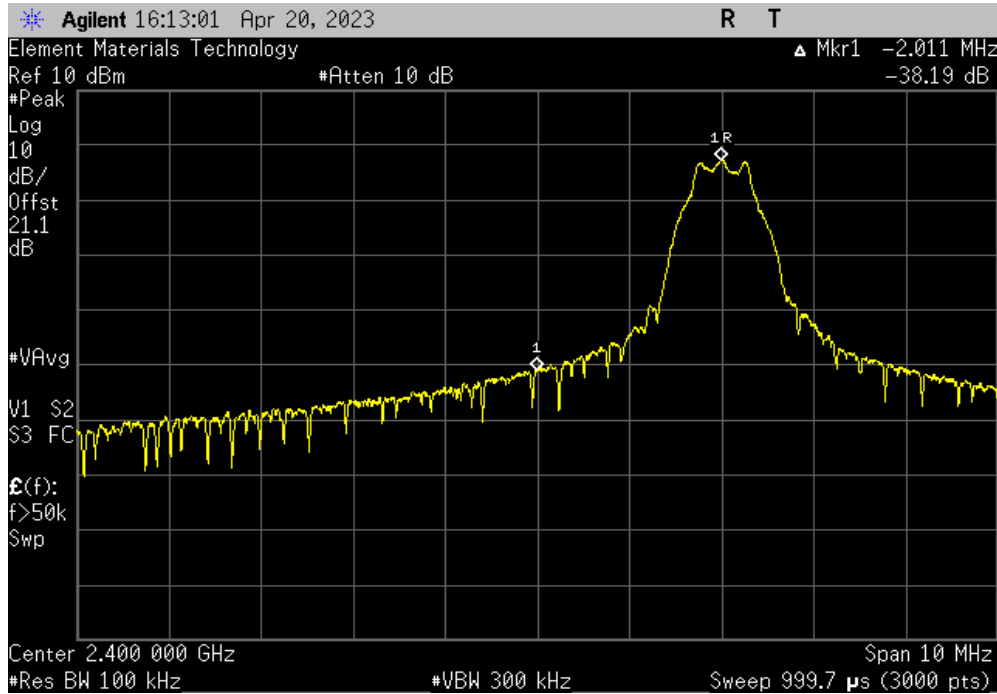

BLE/GFSK 1 Mbps High Channel, 2480 MHz			
	Value (dBc)	Limit ≤ (dBc)	Result
	-43.04	-20	Pass

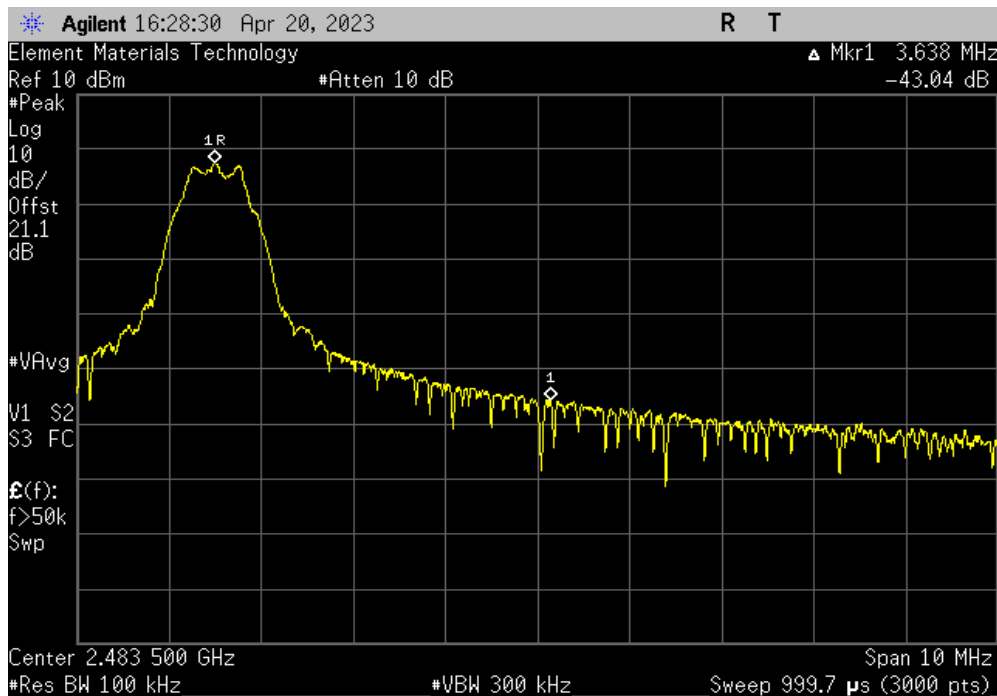

# OUTPUT POWER



XMIT 2022.12.28.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Cable	Micro-Coax	UFD150A-1-0720-200200	NCW	2023-01-18	2024-01-18
Attenuator	Fairview Microwave	SA4014-20	QAA	2023-02-17	2024-02-17
Block - DC	Weinschel Corp.	7006	AMS	2023-01-18	2024-01-18
Generator - Signal	Agilent	N5183A	TIA	2022-06-25	2024-06-25
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	2023-01-19	2024-01-19

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.


Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

# OUTPUT POWER



TbTx 2022.06.03.0 XMit 2022.12.28.0


EUT:	IDQXMOD1	Work Order:	SMTE0005
Serial Number:	Sample 1	Date:	03/01/2023
Customer:	SMART Technologies	Temperature:	20.5°C
Attendees:	Sean MacKellar	Humidity:	31.9%
Project:	None	Barometric Pres.:	1013 mbar
Tested by:	Harry Zhao	Power:	Power over USB
		Job Site:	NC06
<b>TEST SPECIFICATIONS</b>		<b>Test Method</b>	
FCC 15.247:2023		ANSI C63.10:2013	
RSS-247 Issue 2:2017		ANSI C63.10:2013	
RSS-Gen Issue 5:2018+A1:2019+A2:2021		ANSI C63.10:2013	
<b>COMMENTS</b>			
Reference level offset: DC Block, 20 dB attenuator, UFL-to-SMA cable, and measurement cable			
<b>DEVIATIONS FROM TEST STANDARD</b>			
None			
Configuration #	6	Signature	
		Out Pwr (dBm)	Limit (dBm) Result
BLE/GFSK 1 Mbps Low Channel, 2402 MHz		-1.927	30 Pass
BLE/GFSK 1 Mbps Mid Channel, 2442 MHz		-2.036	30 Pass
BLE/GFSK 1 Mbps High Channel, 2480 MHz		-1.998	30 Pass

# OUTPUT POWER




TuTx 2022.06.03.0 XMI 2022.12.28.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz						
	Out Pwr (dBm)	Limit (dBm)	Result			
	-1.927	30	Pass			

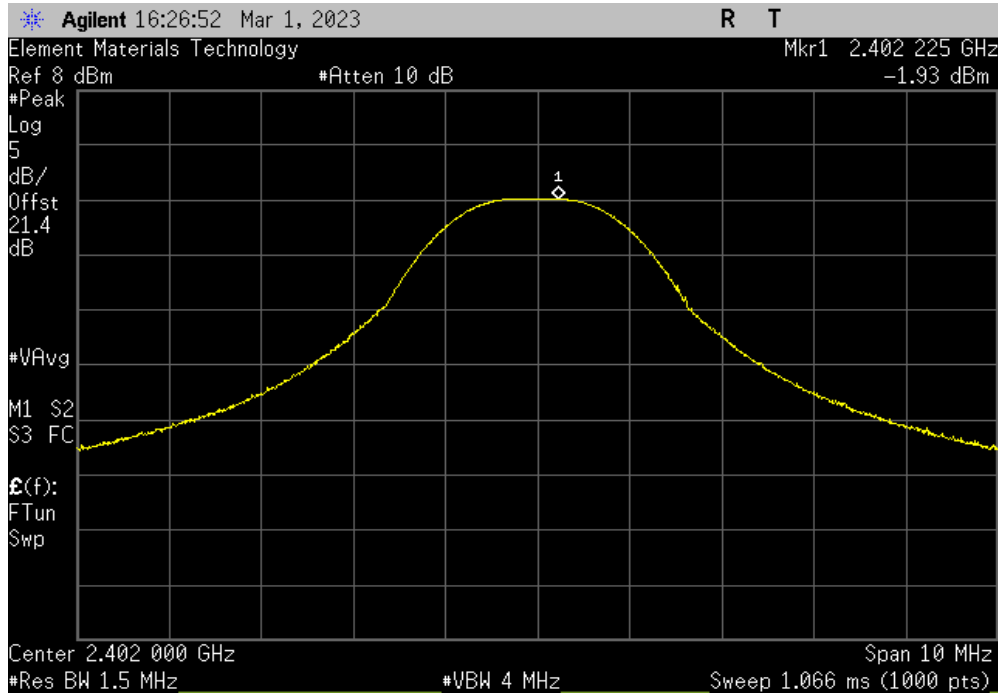

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz						
	Out Pwr (dBm)	Limit (dBm)	Result			
	-2.036	30	Pass			

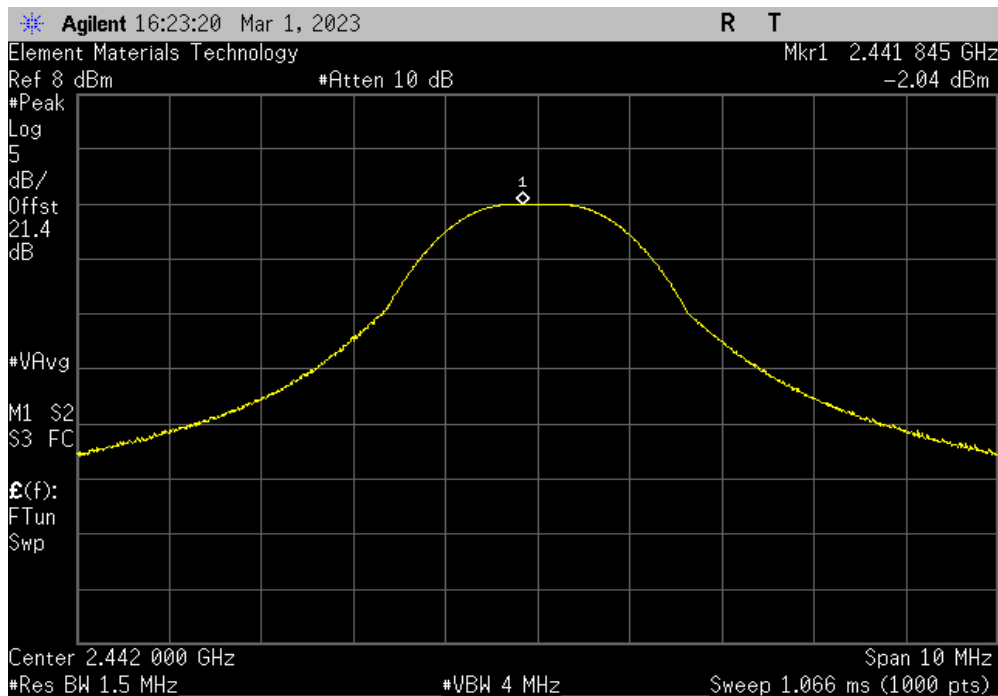


# OUTPUT POWER



TbTx 2022.06.03.0 XMI 2022.12.28.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz						
				Out Pwr (dBm)	Limit (dBm)	Result
				-1.998	30	Pass

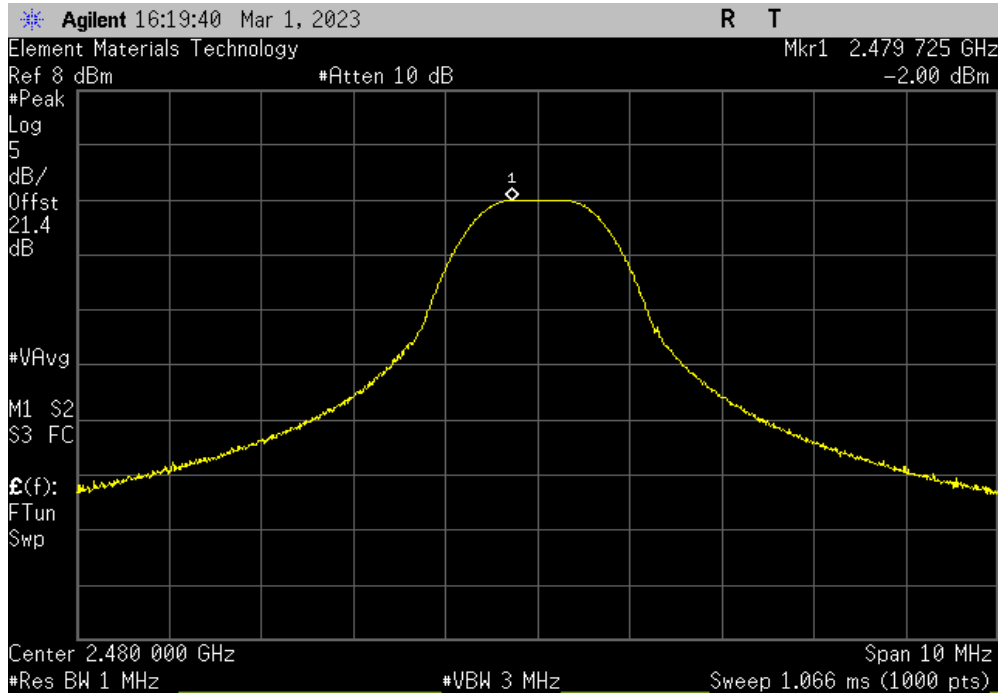

# SPURIOUS CONDUCTED EMISSIONS

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Cable	Micro-Coax	UFD150A-1-0720-200200	NCW	2023-01-18	2024-01-18
Attenuator	Fairview Microwave	SA4014-20	QAA	2023-02-17	2024-02-17
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAT	2022-11-03	2023-11-03
Block - DC	Weinschel Corp.	7006	AMS	2023-01-18	2024-01-18
Generator - Signal	Agilent	N5183A	TIA	2022-06-25	2024-06-25

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the fundamental was measured with a 100 kHz resolution bandwidth and the highest value was recorded. The rest of the spectrum was then measured with a 100 kHz resolution bandwidth and the highest value was found. The difference between the value found on the fundamental and the rest of the spectrum was compared against the limit to determine compliance.

The reference level offset for the fundamental screen capture was based on a measured value of the loss between the spectrum analyzer and the EUT which was verified at the time of test. The remaining screen capture(s) use an internal transducer factor on the analyzer to correct the displayed trace based on the cable loss over frequency. The reference level offset for the additional screen capture(s) is then based on the expected attenuator value and any other losses.

Fundamental Offset = Ref Lvl Offset showing measured composite factor of all losses


Remaining Screen capture(s) Offset = "Internal" cable loss factor not shown on screen capture + Ref Lvl Offset showing expected attenuator value and any other losses



# SPURIOUS CONDUCTED EMISSIONS



TbTtx 2022.06.03.0 XMt 2023.02.14.0


EUT: IDQXMOD1	Work Order: SMTE0005				
Serial Number: Sample 1	Date: 04/20/23				
Customer: SMART Technologies	Temperature: 23.2°C				
Attendees: Sean MacKellar	Humidity: 41.9%				
Project: None	Barometric Pres.: 1020 mbar				
Tested by: Harry Zhao	Power: Power over USB				
	Job Site: NC06				
<b>TEST SPECIFICATIONS</b>					
	<b>Test Method</b>				
FCC 15.247:2023	ANSI C63.10:2013				
RSS-247 Issue 2:2017	ANSI C63.10:2013				
RSS-Gen Issue 5:2018+A1:2019+A2:2021	ANSI C63.10:2013				
<b>COMMENTS</b>					
Reference level offset: DC Block, 20 dB attenuator, UFL-to-SMA cable, and measurement cable					
<b>DEVIATIONS FROM TEST STANDARD</b>					
None					
Configuration #	6				
	<i>Signature</i> 				
	<b>Frequency Range</b>				
	<b>Measured Freq (MHz)</b>				
	<b>Max Value (dBc)</b>				
	<b>Limit ≤ (dBc)</b>				
	<b>Result</b>				
BLE/GFSK 1 Mbps Low Channel, 2402 MHz	Fundamental	2402.01	N/A	N/A	N/A
BLE/GFSK 1 Mbps Low Channel, 2402 MHz	30 MHz - 12.5 GHz	7115.9	-50.25	-20	Pass
BLE/GFSK 1 Mbps Low Channel, 2402 MHz	12.5 GHz - 25 GHz	14020	-44.99	-20	Pass
BLE/GFSK 1 Mbps Mid Channel, 2442 MHz	Fundamental	2442.01	N/A	N/A	N/A
BLE/GFSK 1 Mbps Mid Channel, 2442 MHz	30 MHz - 12.5 GHz	12379.7	-49.04	-20	Pass
BLE/GFSK 1 Mbps Mid Channel, 2442 MHz	12.5 GHz - 25 GHz	13868.9	-44.08	-20	Pass
BLE/GFSK 1 Mbps High Channel, 2480 MHz	Fundamental	2480.01	N/A	N/A	N/A
BLE/GFSK 1 Mbps High Channel, 2480 MHz	30 MHz - 12.5 GHz	6995.4	-50.49	-20	Pass
BLE/GFSK 1 Mbps High Channel, 2480 MHz	12.5 GHz - 25 GHz	13933	-45.35	-20	Pass

# SPURIOUS CONDUCTED EMISSIONS




TbTx 2022.06.03.0 XMI 2023.02.14.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2402.01	N/A	N/A	N/A	

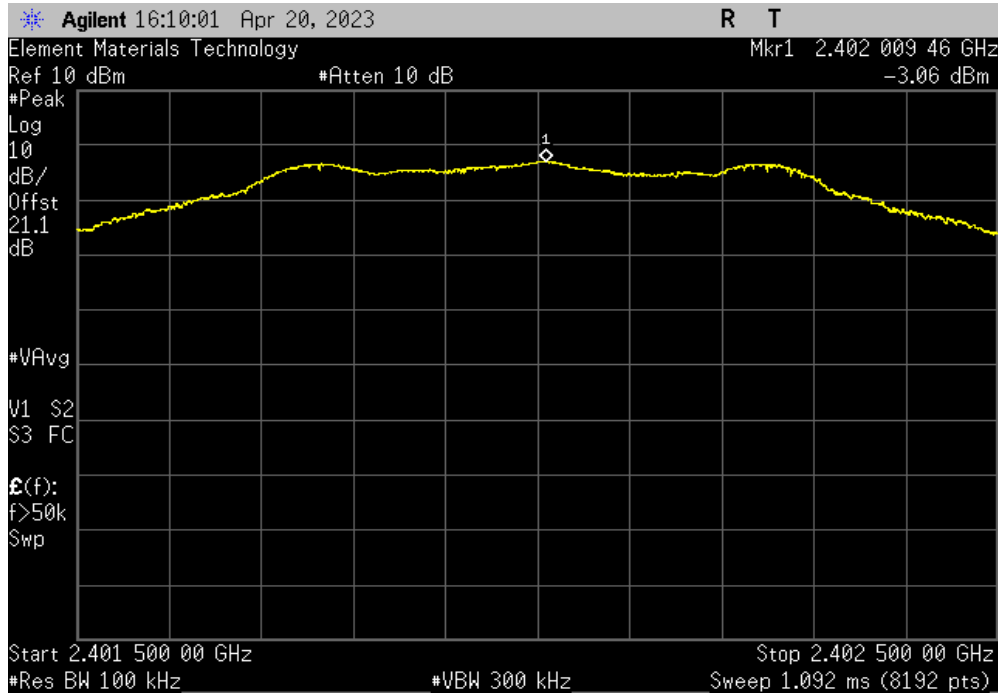

BLE/GFSK 1 Mbps Low Channel, 2402 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	7115.9	-50.25	-20	Pass	

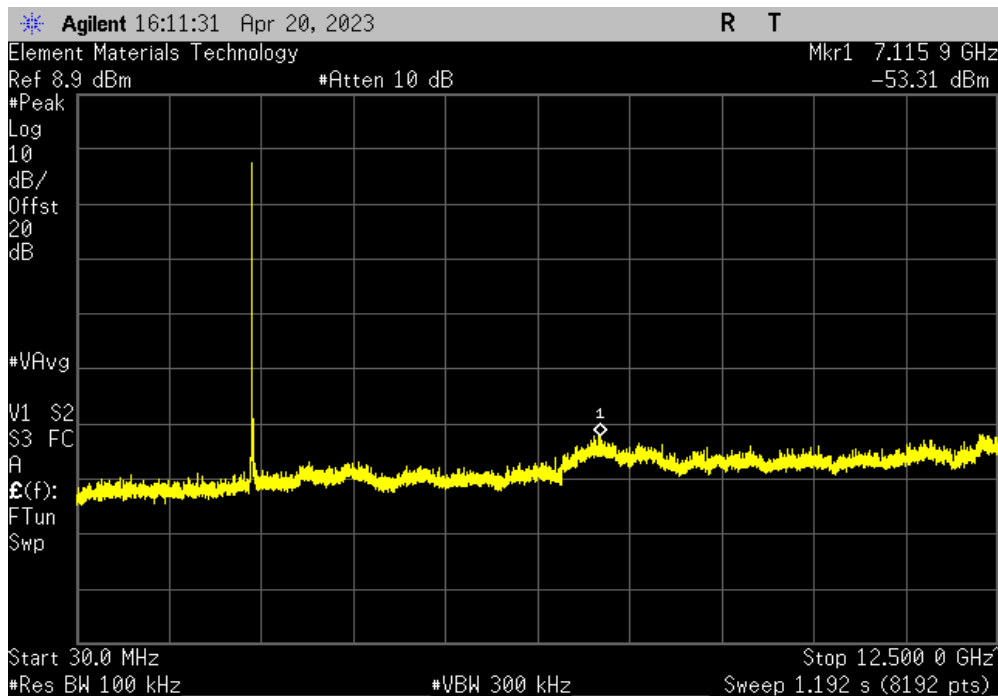


# SPURIOUS CONDUCTED EMISSIONS




TbTx 2022.06.03.0 XMI 2023.02.14.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	14020	-44.99	-20	Pass	

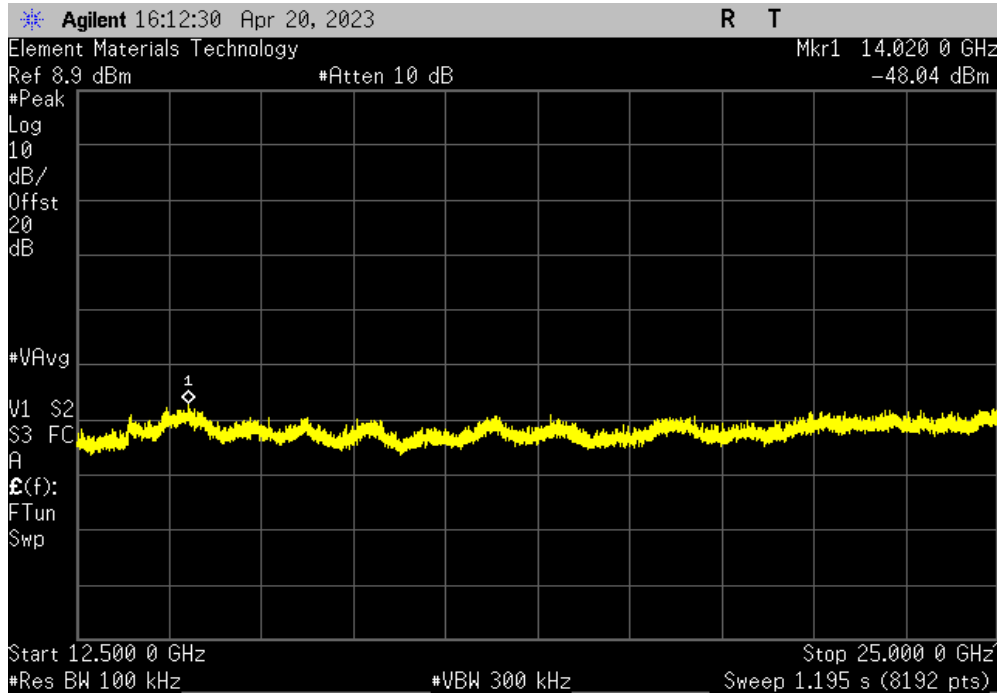

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2442.01	N/A	N/A	N/A	

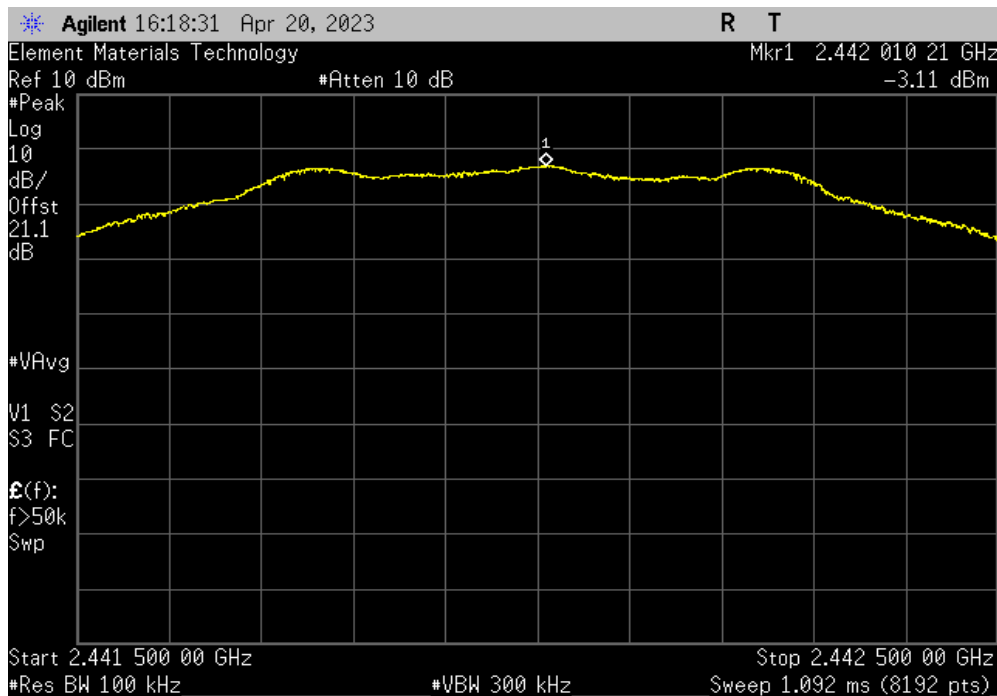


# SPURIOUS CONDUCTED EMISSIONS




TbTx 2022.06.03.0 XMI 2023.02.14.0

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
30 MHz - 12.5 GHz	12379.7	-49.04	-20	Pass

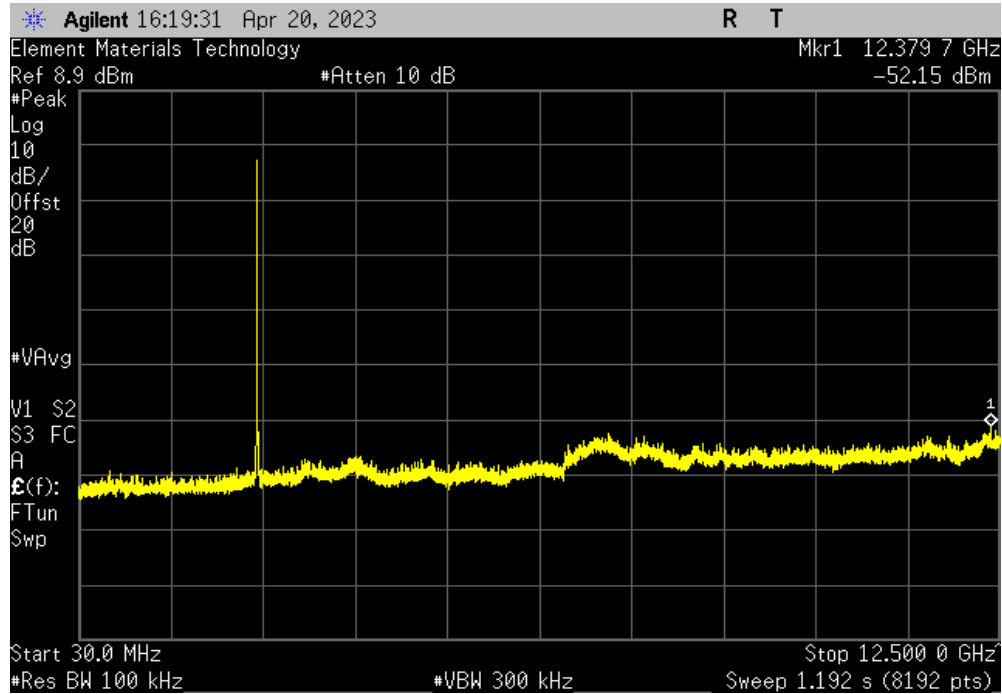

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
12.5 GHz - 25 GHz	13868.9	-44.08	-20	Pass

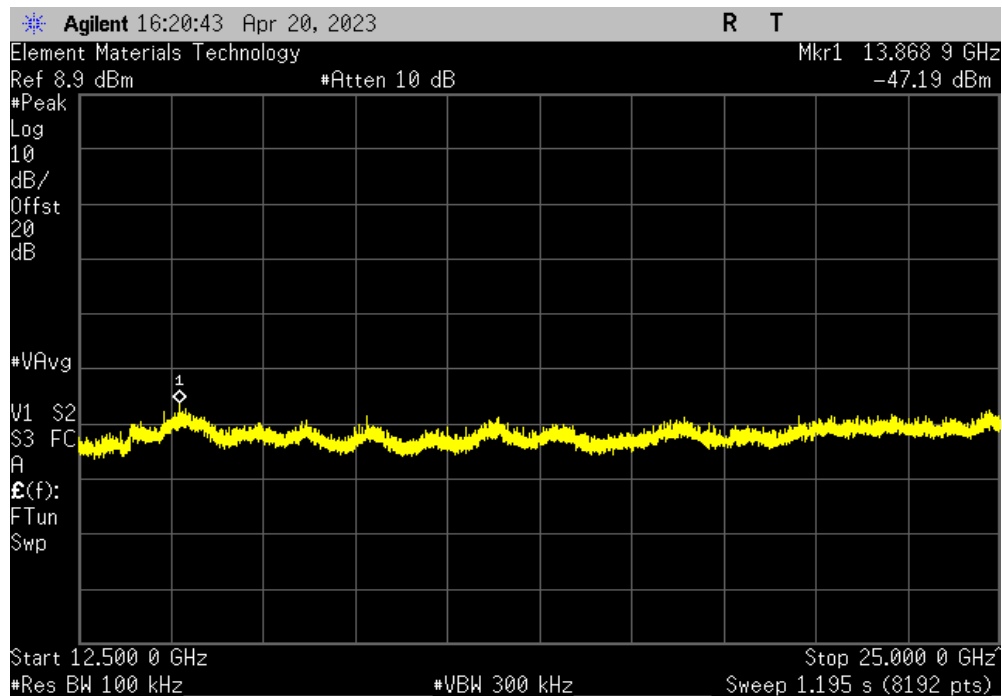


# SPURIOUS CONDUCTED EMISSIONS




TbTx 2022.06.03.0 XMI 2023.02.14.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2480.01	N/A	N/A	N/A	

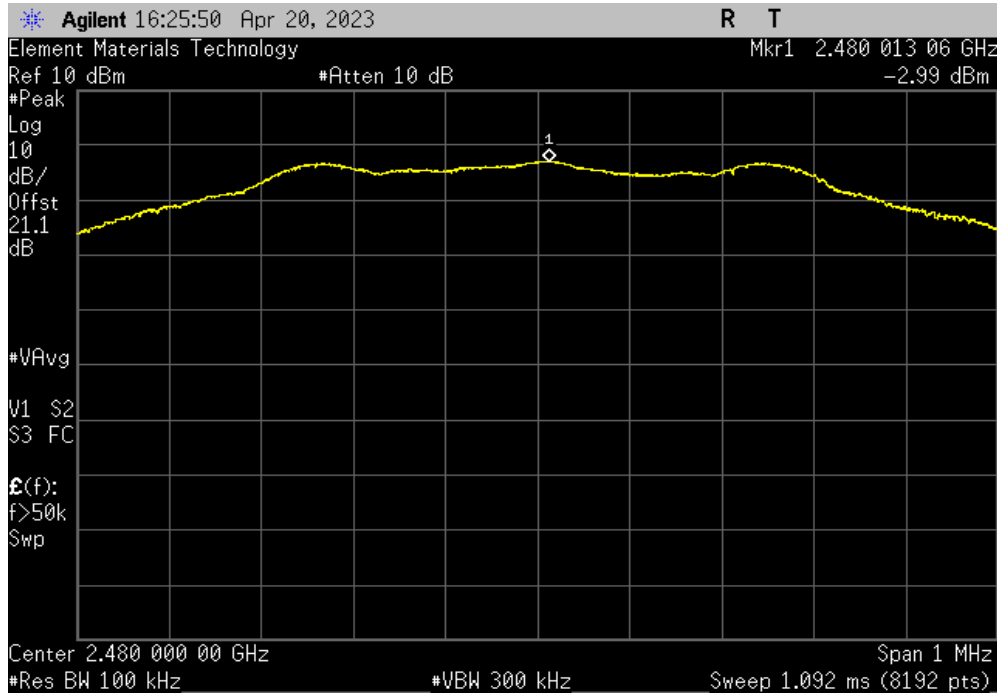

BLE/GFSK 1 Mbps High Channel, 2480 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	6995.4	-50.49	-20	Pass	

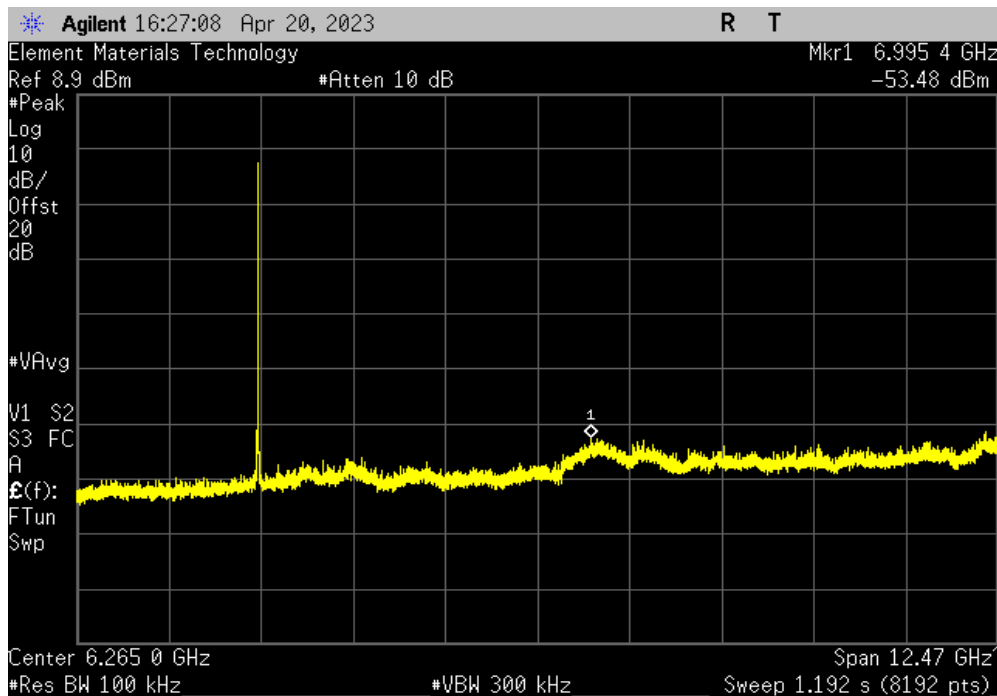


# SPURIOUS CONDUCTED EMISSIONS



TbTx 2022.06.03.0 XMI 2023.02.14.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
12.5 GHz - 25 GHz	13933	-45.35	-20	Pass

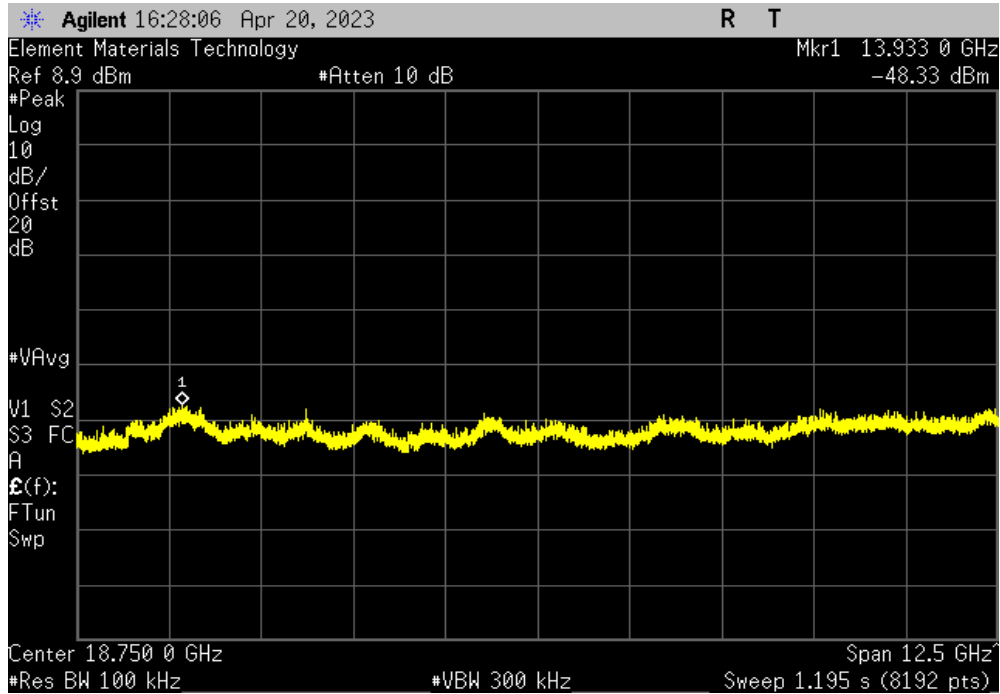

End of Test Report