


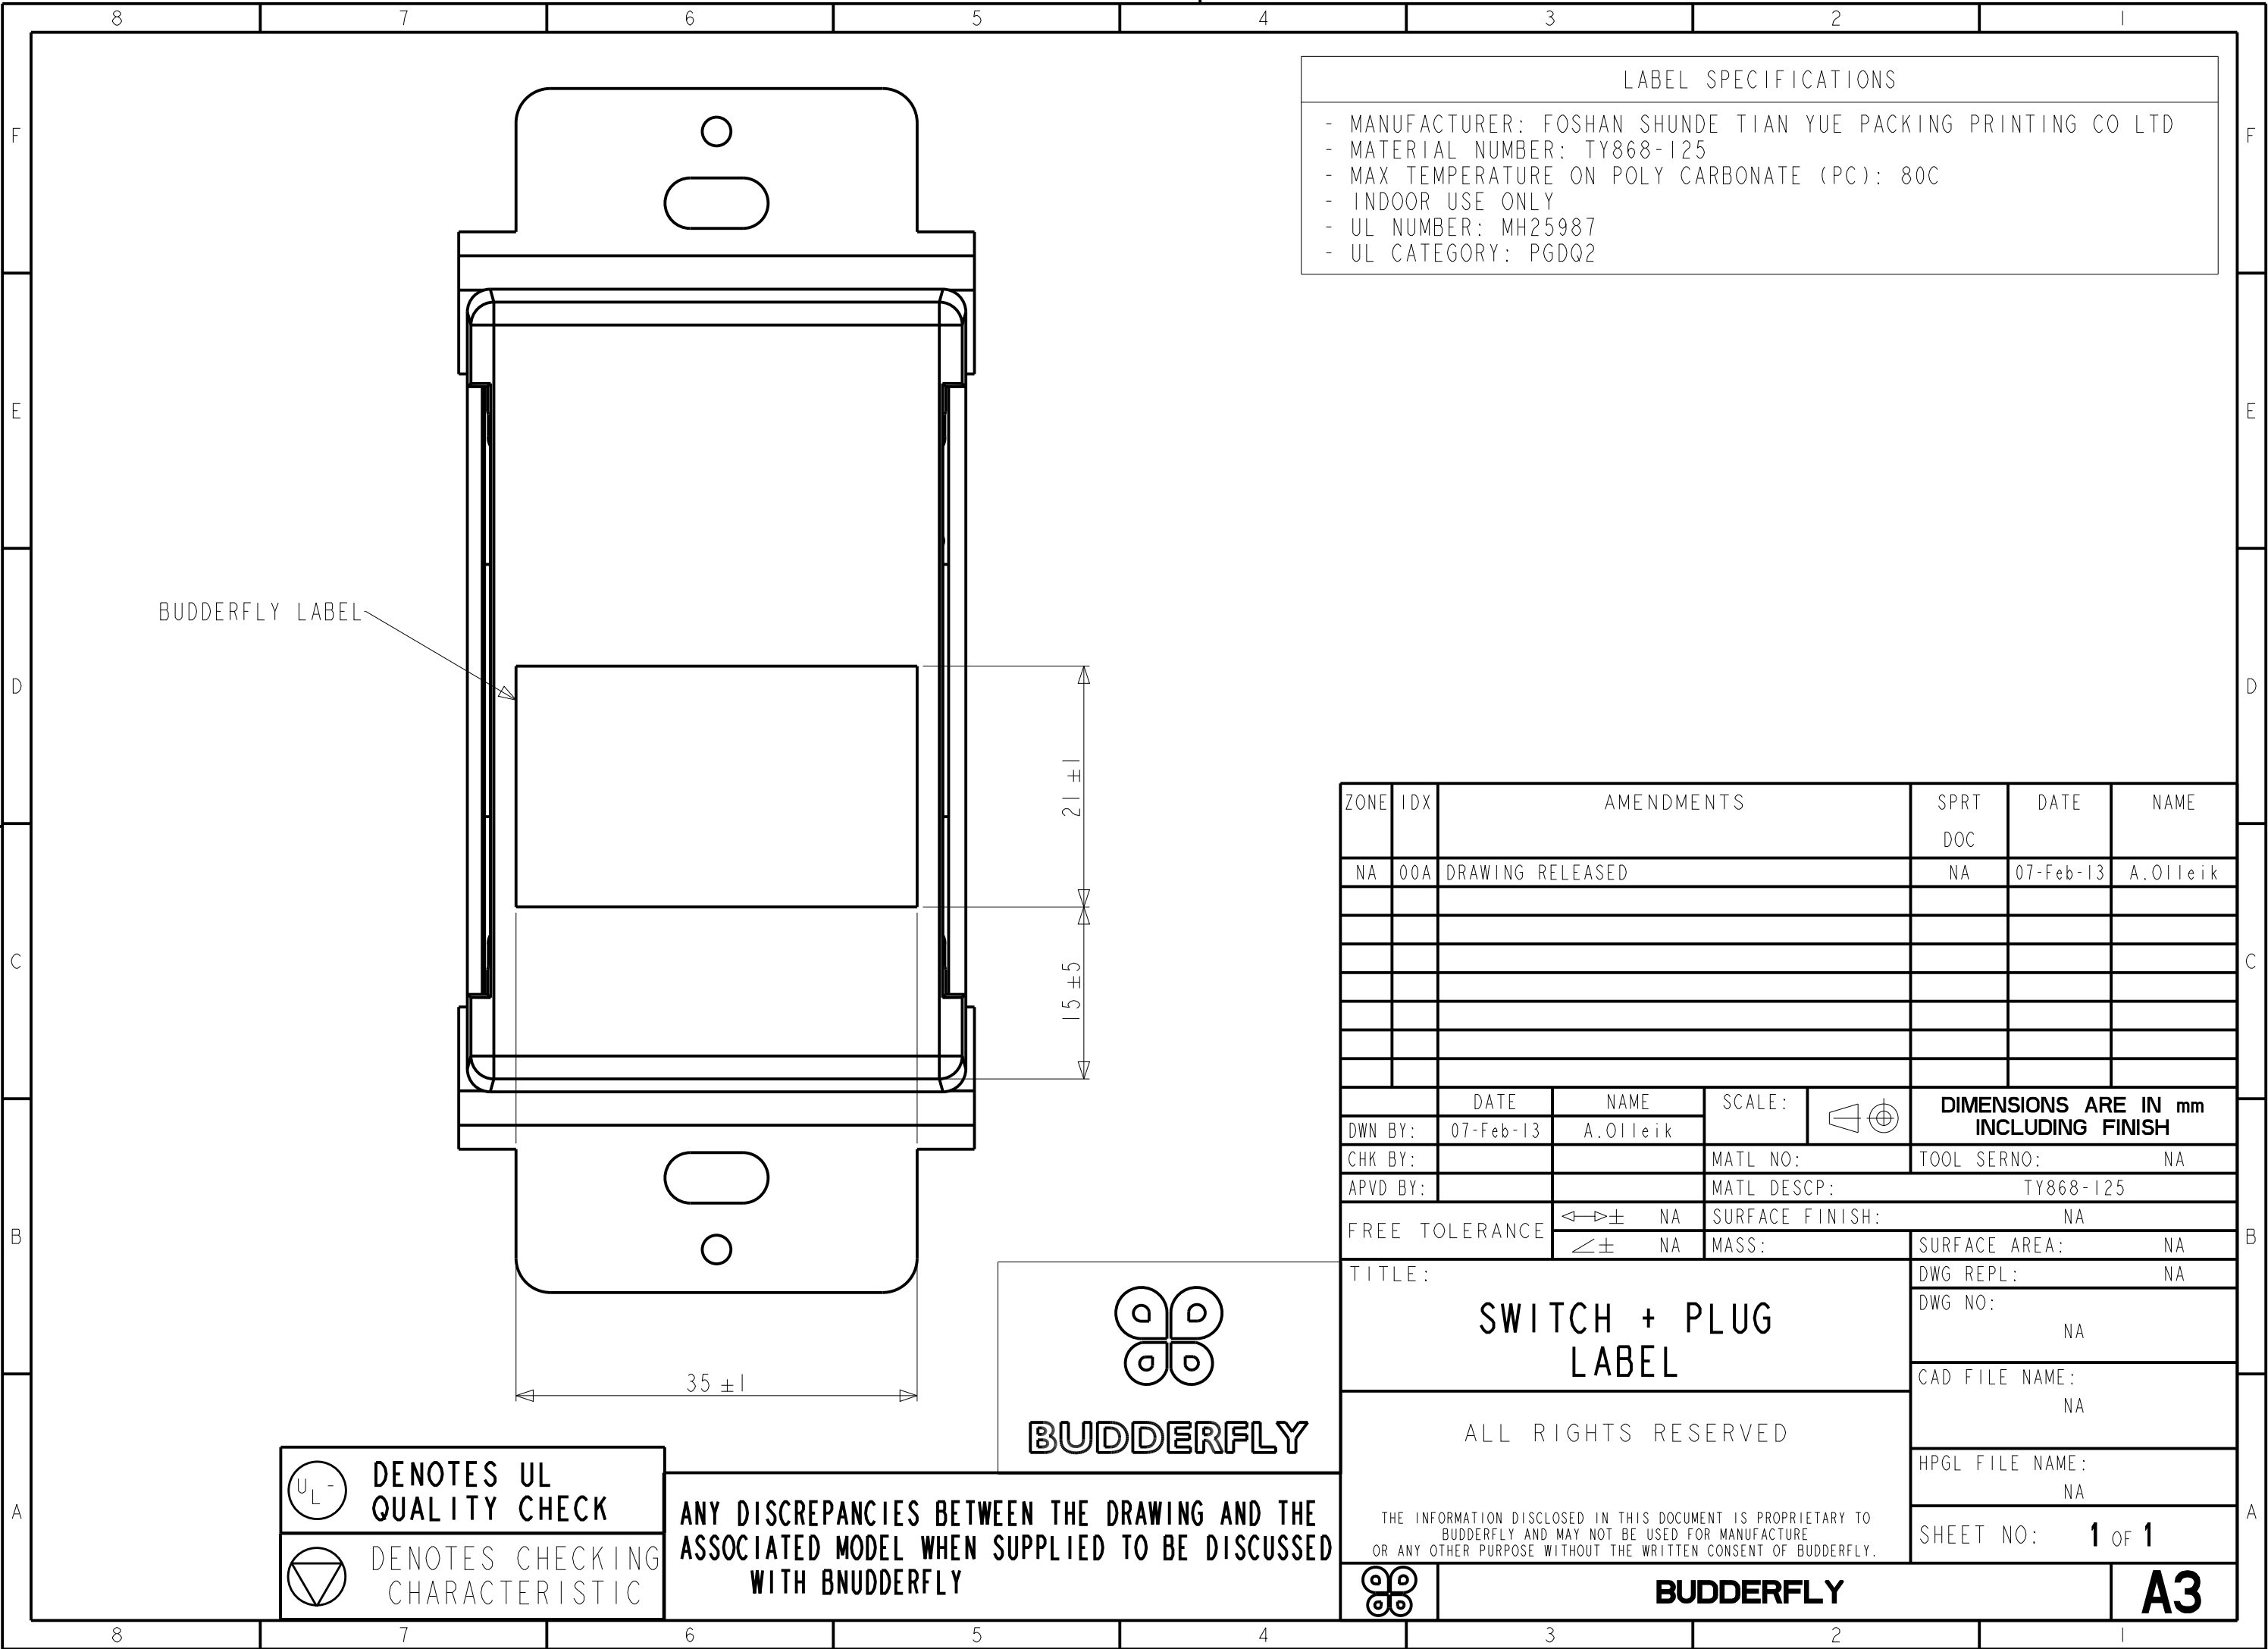


LABEL SPECIFICATIONS					
- MANUFACTURER: FOSHAN SHUNDE TIAN YUE PACKING PRINTING CO LTD					
- MATERIAL NUMBER: TY868-125					
- MAX TEMPERATURE ON POLY CARBONATE (PC): 80C					
- INDOOR USE ONLY					
- UL NUMBER: MH25987					
- UL CATEGORY: PGDQ2					

ZONE	IDX	AMENDMENTS				SPRT DOC	DATE	NAME
NA	00A	DRAWING RELEASED				NA	07-Feb-13	A.Olleik
		DATE	NAME	SCALE:		DIMENSIONS ARE IN mm INCLUDING FINISH		
DWN BY:	07-Feb-13	A.Olleik						
CHK BY:				MATL NO:	TOOL SERNO: NA			
APVD BY:				MATL DESC:		TY868-125		
FREE TOLERANCE		 ±	NA	SURFACE FINISH:		NA		
		 ±	NA	MASS:		SURFACE AREA: NA		
TITLE: SWITCH + PLUG LABEL						DWG REPL: NA		
						DWG NO: NA		
ALL RIGHTS RESERVED						CAD FILE NAME: NA		
						HPGL FILE NAME: NA		
THE INFORMATION DISCLOSED IN THIS DOCUMENT IS PROPRIETARY TO BUDDERFLY AND MAY NOT BE USED FOR MANUFACTURE OR ANY OTHER PURPOSE WITHOUT THE WRITTEN CONSENT OF BUDDERFLY.						SHEET NO: 1 OF 1		
								
BUDDERFLY								A3

	DENOTES UL QUALITY CHECK
	DENOTES CHECKING CHARACTERISTIC

ANY DISCREPANCIES BETWEEN THE DRAWING AND THE ASSOCIATED MODEL WHEN SUPPLIED TO BE DISCUSSED WITH BNUDDERFLY

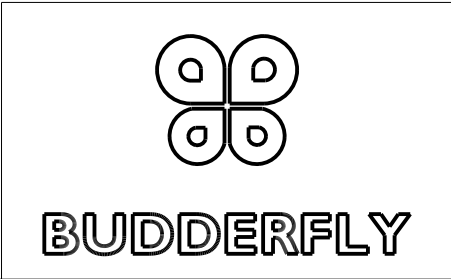



Switch

Part No S0711011

FOR INDOOR USE ONLY

Dual Band VERSION 5.00

Rated:

- 120V, 60 Hertz: 1600W for Tungsten, 1400W for electronic ballast, 800W for standard ballast
- 277V, 60 Hertz: 3300W for electronic ballast
- 1200W for standard ballast.

FCC ID: QCVS0711011

www.budderfly.com

Made in China

U.S. Patent No. 8,140,279

14 Dec 2012



(APPLIANCE CONTROL)

4NE7