

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan  
District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM130200077801  
Page: 1 of 98

## FCC REPORT

<b>Application No:</b>	SZEM1302000778RF
<b>Applicant:</b>	XiangDe electronic technology (ShenZhen) CO., LTD
<b>Manufacturer:</b>	XiangDe electronic technology (ShenZhen) CO., LTD
<b>Factory:</b>	XiangDe electronic technology (ShenZhen) CO., LTD
<b>Product Name:</b>	MID
<b>Model No.(EUT):</b>	PI070H08XO
<b>FCC ID:</b>	QD4WA168
<b>Standards:</b>	47 CFR Part 15, Subpart C (2011)
<b>Date of Receipt:</b>	2013-02-22
<b>Date of Test:</b>	2013-02-26 to 2013-04-08
<b>Date of Issue:</b>	2013-05-02
<b>Test Result:</b>	<b>PASS *</b>

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang  
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 2 Test Summary

Test Item	Test Requirement	Test method	Result
<b>Antenna Requirement</b>	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	KDB558074 D01	PASS
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.4-2009+KDB 558074 D01	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	KDB558074 D01	PASS
<b>6dB Occupied Bandwidth</b>	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	KDB558074 D01	PASS
<b>Power Spectral Density</b>	47 CFR Part 15, Subpart C Section 15.247 (e)	KDB558074 D01	PASS
<b>Band-edge for RF Conducted Emissions</b>	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01	PASS
<b>RF Conducted Spurious Emissions</b>	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01	PASS
<b>Radiated Spurious Emissions</b>	47 CFR Part 15, Subpart C Section 15.205/15.209	KDB558074 D01	PASS
<b>Band Edge (Radiated Emission)</b>	47 CFR Part 15, Subpart C Section 15.205/15.209	KDB558074 D01	PASS

### 3 Contents

	Page
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>3</b>
<b>4 GENERAL INFORMATION.....</b>	<b>4</b>
4.1 CLIENT INFORMATION .....	4
4.2 GENERAL DESCRIPTION OF EUT .....	4
4.3 TEST ENVIRONMENT AND MODE.....	6
4.4 DESCRIPTION OF SUPPORT UNITS.....	6
4.5 TEST LOCATION.....	6
4.6 TEST FACILITY.....	7
4.7 DEVIATION FROM STANDARDS .....	7
4.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	7
4.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	7
4.10 EQUIPMENT LIST .....	8
<b>5 TEST RESULTS AND MEASUREMENT DATA.....</b>	<b>11</b>
5.1 ANTENNA REQUIREMENT .....	11
5.2 CONDUCTED EMISSIONS.....	12
5.3 CONDUCTED PEAK OUTPUT POWER .....	16
5.4 6dB OCCUPY BANDWIDTH.....	25
5.5 POWER SPECTRAL DENSITY.....	33
5.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS.....	41
5.7 RF CONDUCTED SPURIOUS EMISSIONS.....	46
5.8 RADIATED SPURIOUS EMISSIONS.....	53
5.8.1 <i>Radiated emission below 1GHz</i> .....	56
5.8.2 <i>Transmitter emission above 1GHz</i> .....	58
5.9 BAND EDGE (RADIATED EMISSION).....	65-98

## 4 General Information

### 4.1 Client Information

Applicant:	XiangDe electronic technology (ShenZhen)CO.,LTD
Address of Applicant:	Blg C16 Fuyuan Inderstrial Area,No.111,Zhoushi Road,Xixiang Street, Baoan district, Shenzhen city, China
Manufacturer:	XiangDe electronic technology (ShenZhen)CO.,LTD
Address of Manufacturer:	Blg C16 Fuyuan Inderstrial Area,No.111,Zhoushi Road,Xixiang Street, Baoan district, Shenzhen city, China
Factory:	XiangDe electronic technology (ShenZhen)CO.,LTD
Address of Factory:	Blg C16 Fuyuan Inderstrial Area,No.111,Zhoushi Road,Xixiang Street, Baoan district, Shenzhen city, China

### 4.2 General Description of EUT

Product Name:	MID	
Model No.:	PI070H08XO	
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz	
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels	
Channel Separation:	5MHz	
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK,BPSK)	
Sample Type:	Portable production	
Antenna Type:	Dedicated	
Antenna Gain:	2.5dBi	
Power Supply:	AC adapter	MODEL:YS02-050200U INPUT:AC 100-240V 50/60Hz 0.32A Max OUTPUT:DC 5.0V 2000mA
	Battery	3.7V 3800mAh rechargeable battery
Test Voltage:	AC 120V 60Hz	
USB cable:	140cm (shield with two core)	

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Operation Frequency each of channel(802.11n HT40)					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2422MHz	4	2437MHz	7	2452MHz
2	2427MHz	5	2442MHz		
3	2432MHz	6	2447MHz		

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

For 802.11n (HT40):

Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz



### 4.3 Test Environment and Mode

<b>Operating Environment:</b>	
Temperature:	23.0 °C
Humidity:	48 % RH
Atmospheric Pressure:	1015 mbar
<b>Test mode:</b>	
Charge + TX mode:	Keep the EUT charging and transmitting with modulation.
TX mode:	Keep the EUT transmitting with modulation.

### 4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
Earphone	N/A	N/A

### 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,  
No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

## 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **VCCI**

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

## 4.7 Deviation from Standards

None.

## 4.8 Abnormalities from Standard Conditions

None.

## 4.9 Other Information Requested by the Customer

None.

## 4.10 Equipment List

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2013-06-10
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2013-10-24
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2013-05-17
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	SEL0162	2013-11-10
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	SEL0163	2013-11-10
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	SEL0164	2013-11-10
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2013-05-17
8	Coaxial Cable	SGS	N/A	SEL0025	2013-05-29
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
10	Humidity/ Temperature Indicator	Shanghai Qixiang	ZJ1-2B	SEL0103	2013-10-24
11	Barometer	Chang Chun	DYM3	SEL0088	2013-05-24



RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2013-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2013-05-17
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2013-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2013-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2013-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2013-05-17
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2013-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2013-05-59
10	Coaxial cable	SGS	N/A	SEL0189	2013-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2013-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2013-05-29
13	Band filter	Amindeon	82346	SEL0094	2013-05-17
14	Barometer	Chang Chun	DYM3	SEL0088	2013-05-24
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
16	Humidity/ Temperature Indicator	Shanghai Qixiang	ZJ1-2B	SEL0103	2013-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2013-05-17
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2013-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2013-06-04

\*This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




<b>RF connected test</b>					
<b>Item</b>	<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal.Due date (yyyy-mm-dd)</b>
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2013-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2013-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2013-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2013-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2013-05-24
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2013-05-17
8	Band filter	amideon	82346	SEL0094	2013-05-17
9	POWER METER	R & S	NRVS	SEL0144	2013-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2013-05-17
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2013-10-24

**Note: The calibration interval is one year, all the instruments are valid.**


## 5 Test results and Measurement Data

### 5.1 Antenna Requirement
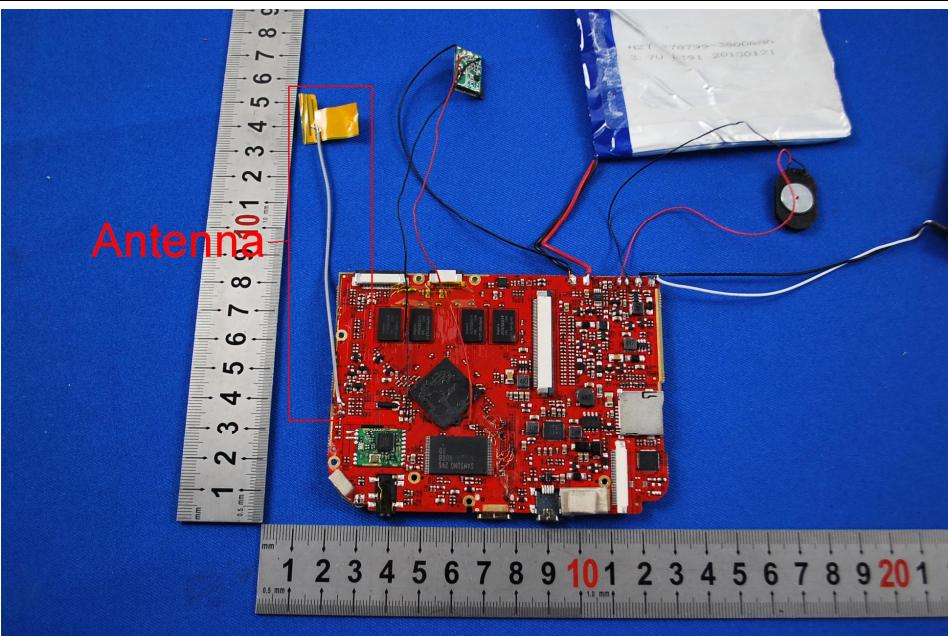
<b>Standard requirement:</b>	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
15.247(b) (4) requirement:	The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
<b>EUT Antenna:</b>	The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.5dBi.
	

## 5.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207					
Test Method:	ANSI C63.4-2009+KDB 558074 D01					
Test Frequency Range:	150kHz to 30MHz					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak	Average		
	0.15-0.5	66 to 56*		56 to 46*		
	0.5-5	56		46		
5-30		60		50		
* Decreases with the logarithm of the frequency.						
Test Procedure:	<ol style="list-style-type: none"><li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li><li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li><li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li><li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li><li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.</li></ol>					

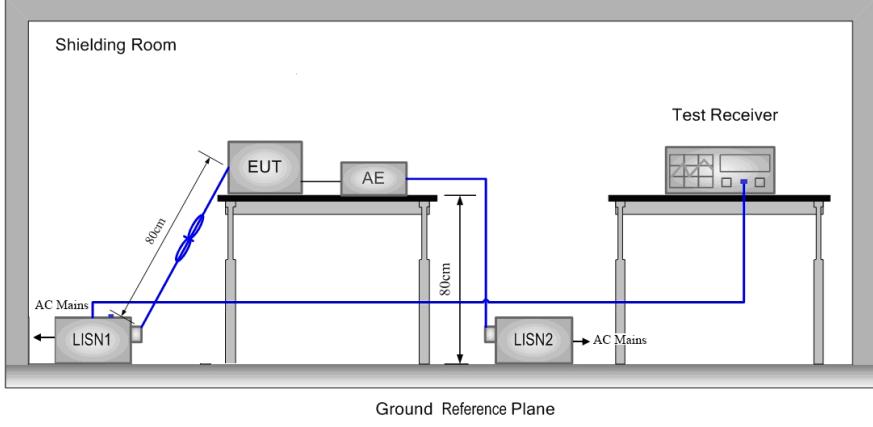
Test Setup:	
Test Mode:	Charge + TX mode
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Live Line:

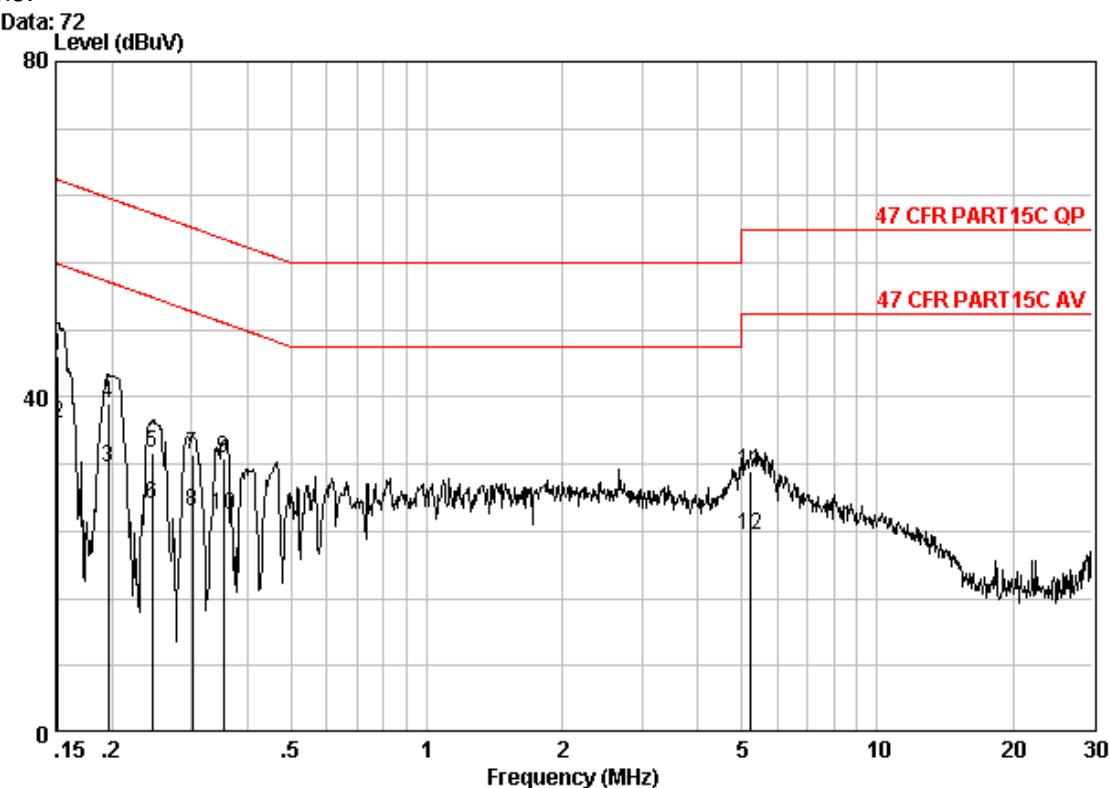

Site : Shielding Room  
 Condition : 47 CFR PART15C QP CE LINE  
 Job No. : 0778RF  
 Mode : charge+TX mode

Freq	Cable	LISN	Read	Limit	Over			
	MHz	Loss	Factor			Line	Limit	Remark
1	0.15160	0.02	9.70	35.09	44.81	65.91	-21.10	QP
2	0.15160	0.02	9.70	27.20	36.92	55.91	-18.99	Average
3	0.19654	0.02	9.70	21.94	31.66	53.76	-22.09	Average
4	0.19654	0.02	9.70	29.44	39.16	63.76	-24.60	QP
5	0.24552	0.02	9.70	23.62	33.34	61.91	-28.57	QP
6	0.24552	0.02	9.70	17.62	27.33	51.91	-24.58	Average
7	0.30188	0.01	9.70	23.53	33.24	60.19	-26.95	QP
8	0.30188	0.01	9.70	16.70	26.41	50.19	-23.78	Average
9	0.35388	0.01	9.76	22.90	32.66	58.87	-26.21	QP
10	0.35388	0.01	9.76	16.11	25.88	48.87	-22.99	Average
11	5.249	0.01	9.90	21.19	31.10	60.00	-28.90	QP
12	5.249	0.01	9.90	13.56	23.47	50.00	-26.53	Average

## Neutral Line:

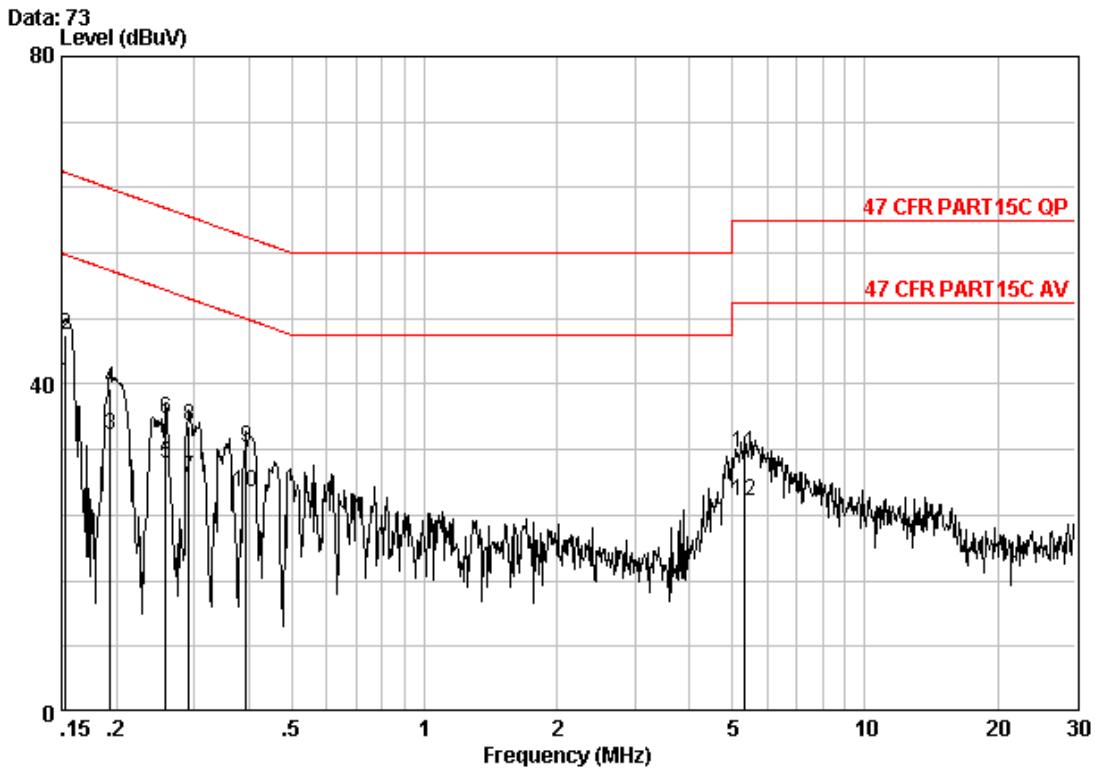

Site : Shielding Room  
Condition : 47 CFR PART15C QP CE NEUTRAL  
Job No. : 0778RF  
Mode : charge+TX mode


Freq	Cable	LISN	Read	Limit	Over	Remark
	Loss	Factor	Level			
	MHz	dB	dB	dBuV	dBuV	dB
1	0.15321	0.02	9.70	30.48	40.20	55.82 -15.62 Average
2	0.15321	0.02	9.70	36.30	46.02	65.82 -19.81 QP
3	0.19344	0.02	9.70	24.08	33.80	53.89 -20.09 Average
4	0.19344	0.02	9.70	29.72	39.44	63.89 -24.44 QP
5	0.25888	0.02	9.70	20.49	30.20	51.47 -21.27 Average
6	0.25888	0.02	9.70	26.03	35.74	61.47 -25.73 QP
7	0.29243	0.01	9.70	18.79	28.50	50.46 -21.96 Average
8	0.29243	0.01	9.70	25.19	34.90	60.46 -25.55 QP
9	0.39344	0.01	9.79	22.45	32.25	57.99 -25.74 QP
10	0.39344	0.01	9.79	17.10	26.90	47.99 -21.09 Average
11	5.333	0.01	9.92	21.60	31.53	60.00 -28.47 QP
12	5.333	0.01	9.92	15.87	25.80	50.00 -24.20 Average

## Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT.
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.



### 5.3 Conducted Peak Output Power

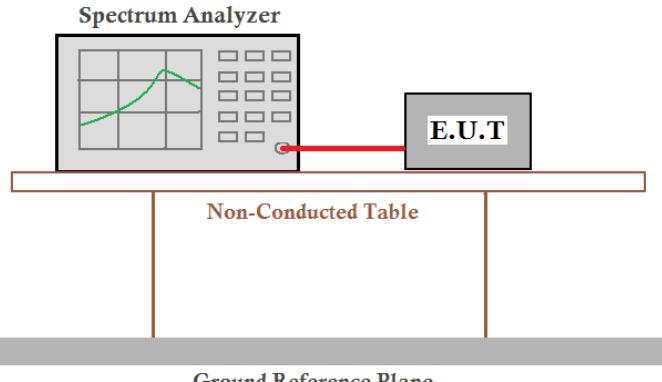Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	KDB558074 D01
Test Setup:	
	<p><i>Remark:</i> <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Test Instruments:	Refer to section 4.10 for details
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n (HT20); 135Mbps of rate is the worst case of 802.11n (HT40).
Limit:	30dBm
Test Results:	Pass

Pre-scan under all rate at lowest channel 1								
Mode	802.11b							
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps				
EIRP(dBm)	16.94	17.46	18.15	18.78				
Mode	802.11g							
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
EIRP(dBm)	16.42	16.85	17.42	17.79	18.02	18.13	18.36	18.49
Mode	802.11n(HT20)							
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps
EIRP(dBm)	16.23	16.63	16.98	17.26	17.66	17.85	17.99	18.12
Mode	802.11n(HT40)							
Data Rate	13.5Mbps	27Mbps	40.5Mbps	54Mbps	81Mbps	108Mbps	121.5Mbps	135Mbps
EIRP(dBm)	15.84	16.06	16.41	16.78	16.97	17.26	17.80	18.01

Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n (HT20); 135Mbps of rate is the worst case of 802.11n (HT40).

**Measurement Data**

802.11b mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	18.78	30.00	Pass
Middle	18.31	30.00	Pass
Highest	18.89	30.00	Pass

802.11g mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	18.49	30.00	Pass
Middle	18.05	30.00	Pass
Highest	18.57	30.00	Pass


802.11n(HT20)mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	18.12	30.00	Pass
Middle	17.91	30.00	Pass
Highest	18.20	30.00	Pass


802.11n(HT40)mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	18.01	30.00	Pass
Middle	17.81	30.00	Pass
Highest	18.30	30.00	Pass

**Test plot as follows:**


Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

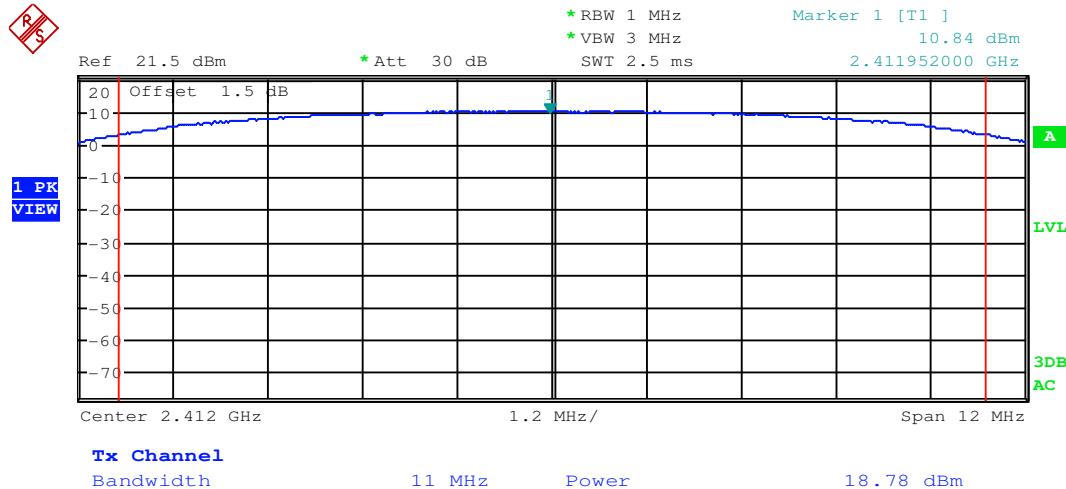


Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

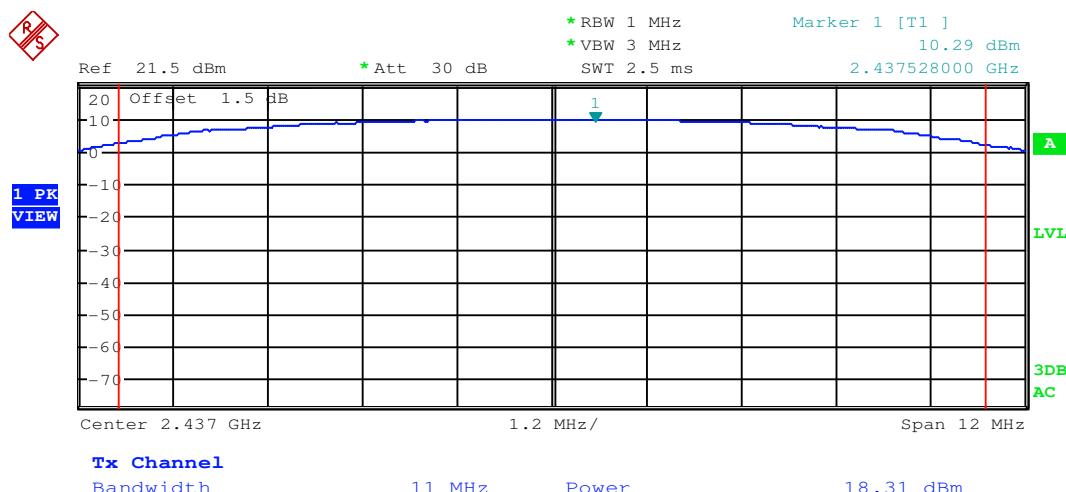


Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

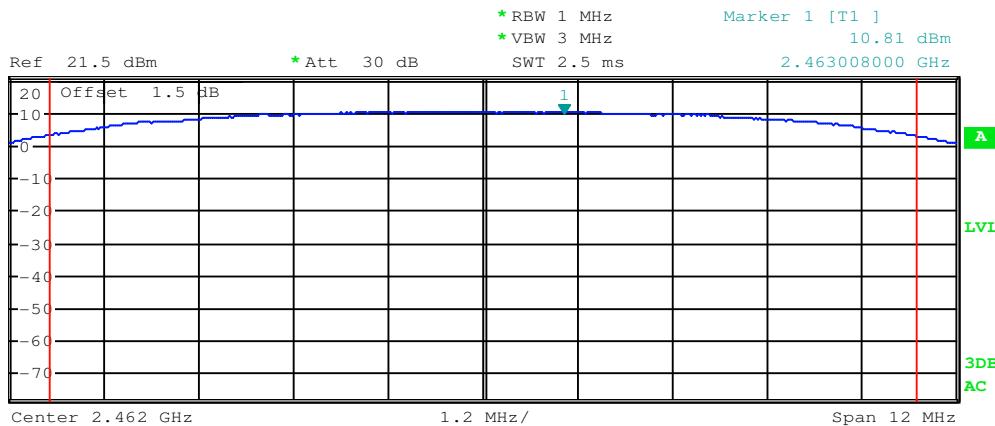


Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

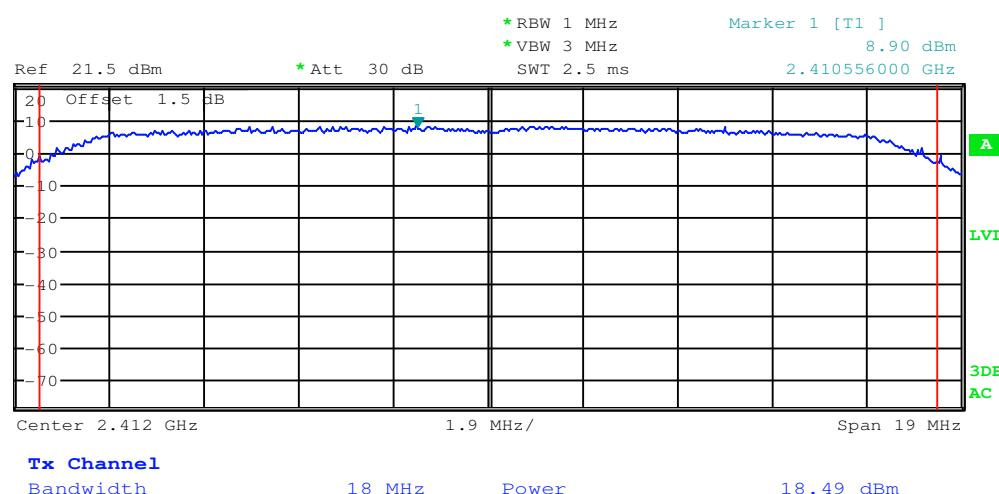


Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

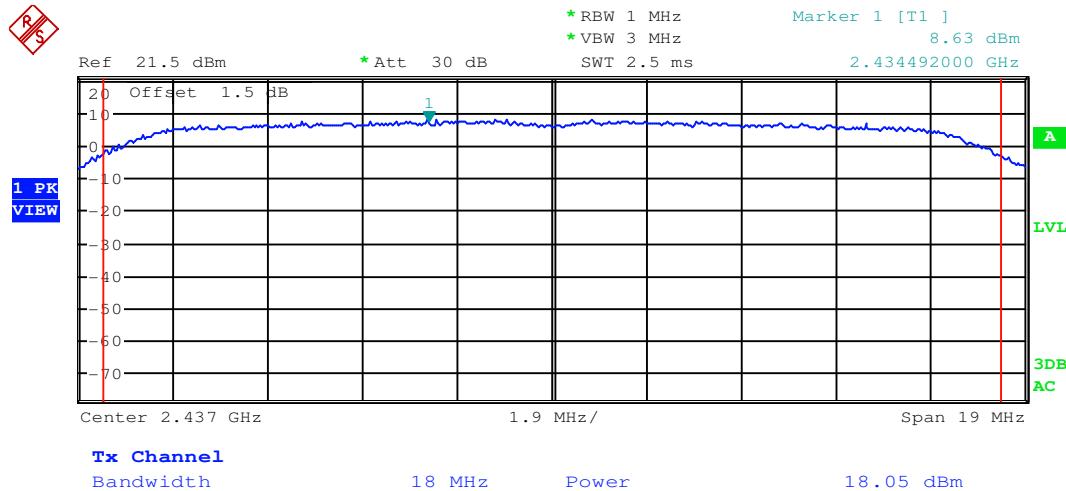


Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

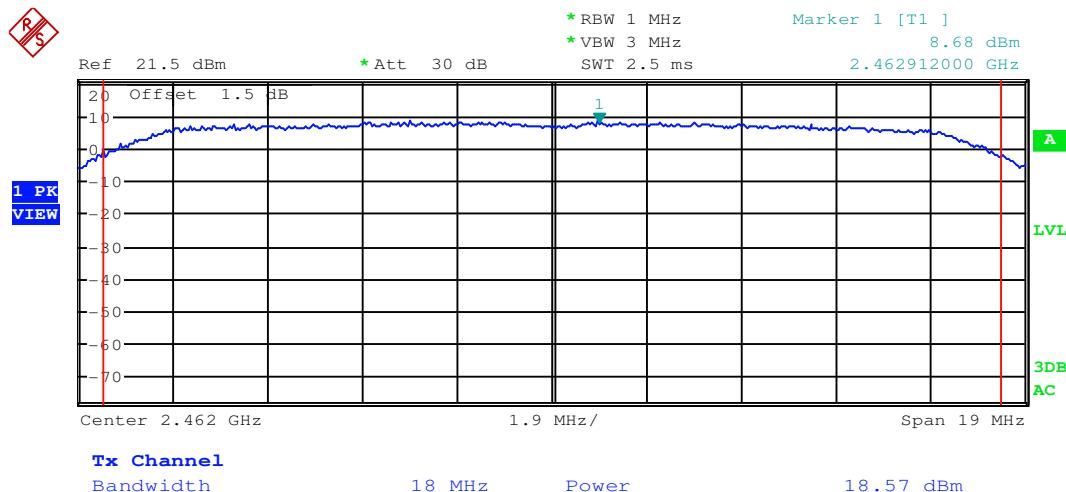


Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

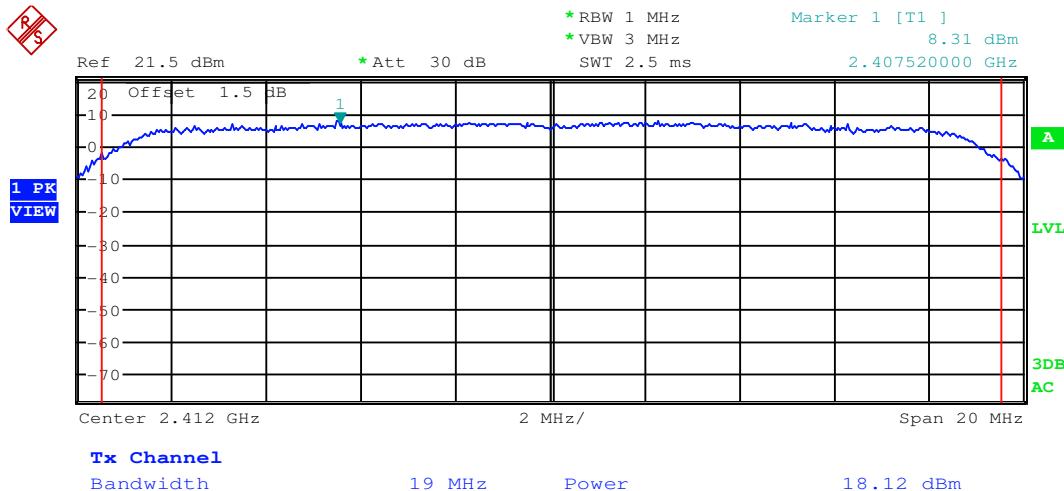


Test mode:	802.11n(HT20)	Test channel:	Middle
------------	---------------	---------------	--------

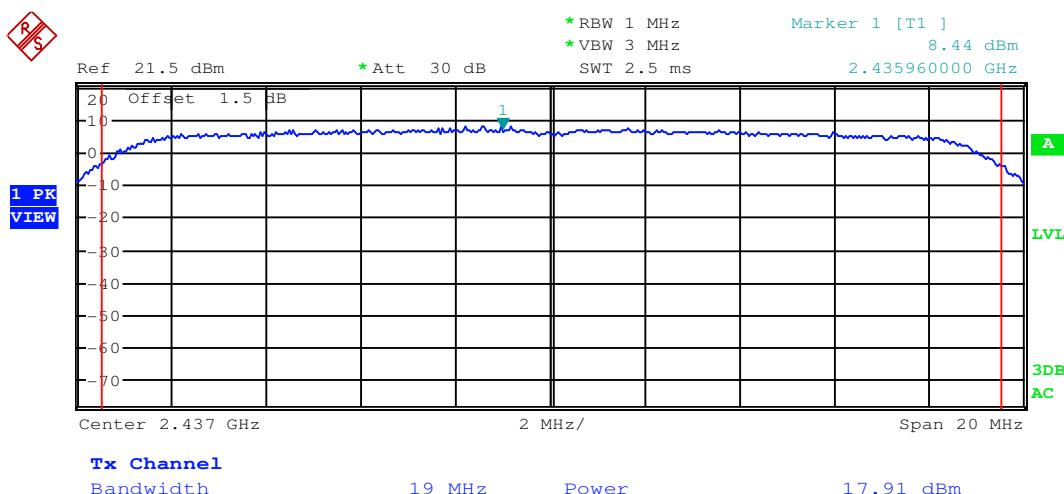


Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

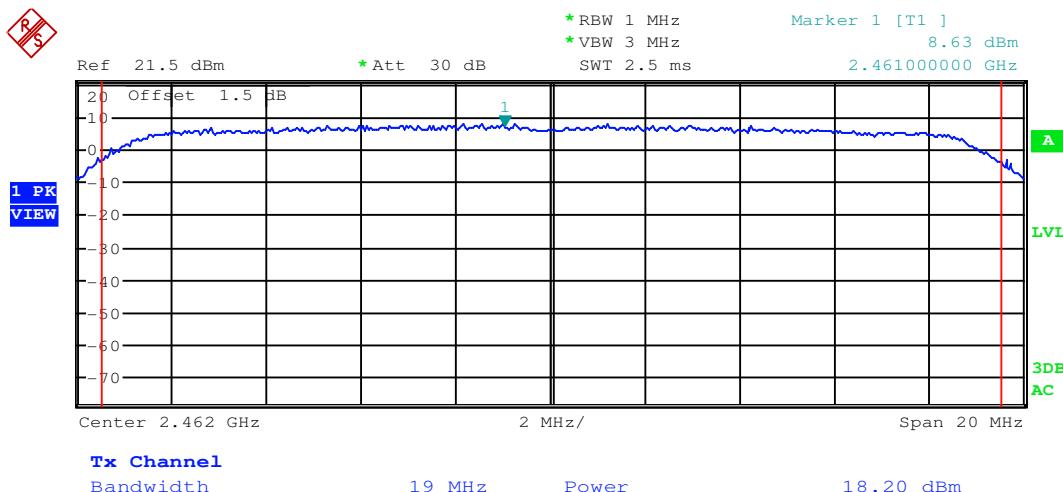


Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

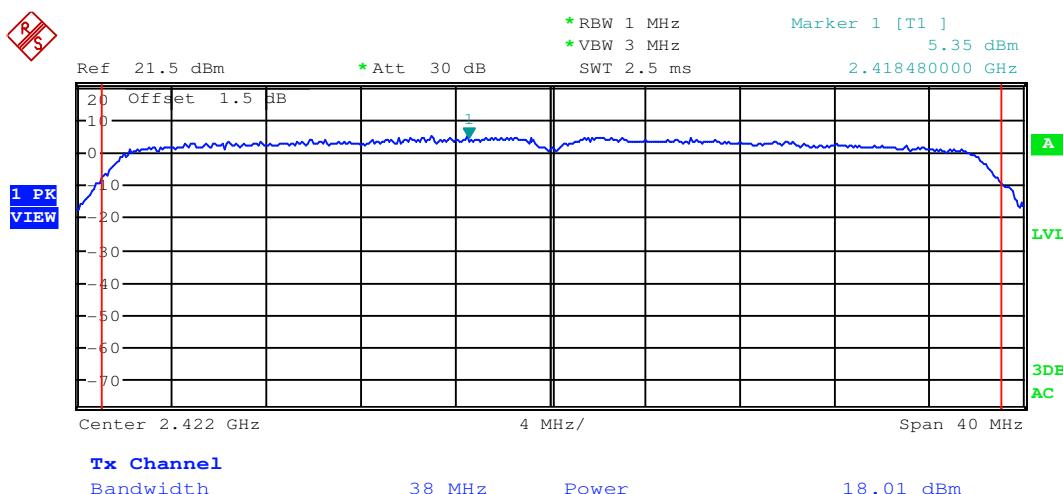


Test mode:	802.11n(HT40)	Test channel:	Middle
------------	---------------	---------------	--------

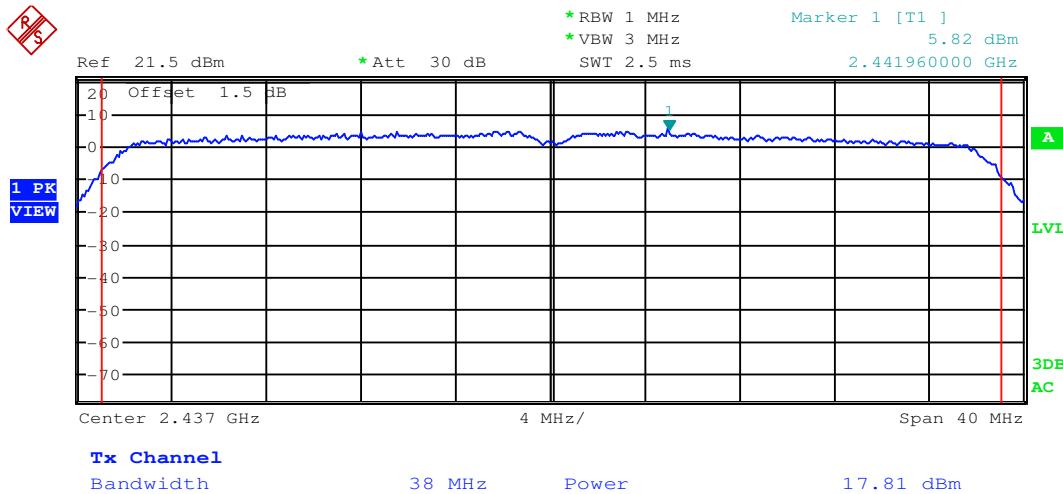

Test mode:	802.11n(HT40)	Test channel:	Highest
------------	---------------	---------------	---------

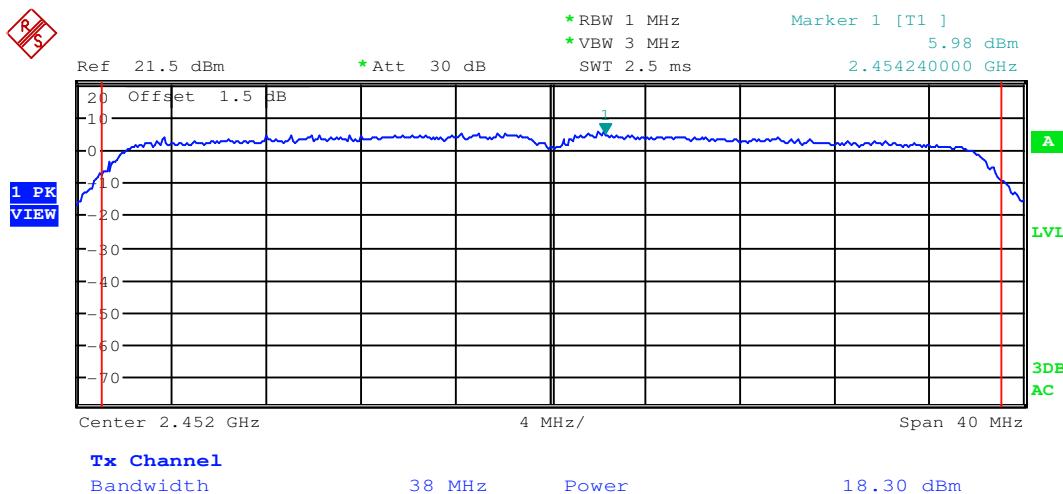

## 5.4 6dB Occupy Bandwidth

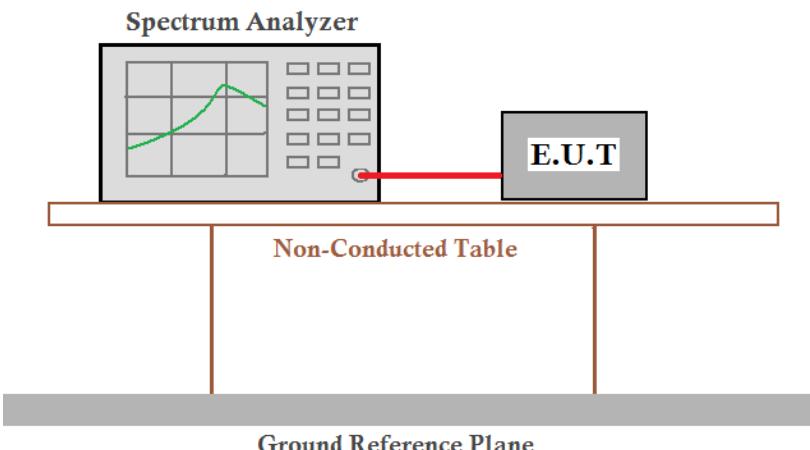Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	KDB558074 D01
Test Setup:	
Instruments Used:	Refer to section 4.10 for details
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n (HT20); 135Mbps of rate is the worst case of 802.11n (HT40).
Limit:	$\geq 500$ kHz
Test Results:	Pass



**Measurement Data**

802.11b mode			
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	9.12	≥500	Pass
Middle	9.30	≥500	Pass
Highest	8.46	≥500	Pass

802.11g mode			
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	16.38	≥500	Pass
Middle	16.50	≥500	Pass
Highest	16.44	≥500	Pass


802.11n(HT20) mode			
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	17.70	≥500	Pass
Middle	17.70	≥500	Pass
Highest	17.76	≥500	Pass


802.11n(HT40) mode			
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	35.60	≥500	Pass
Middle	35.90	≥500	Pass
Highest	35.90	≥500	Pass

**Test plot as follows:**


Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

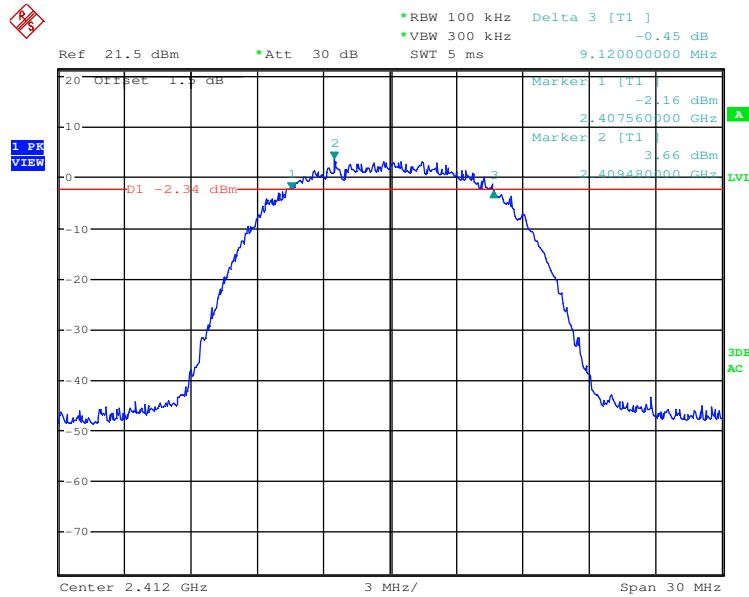


Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

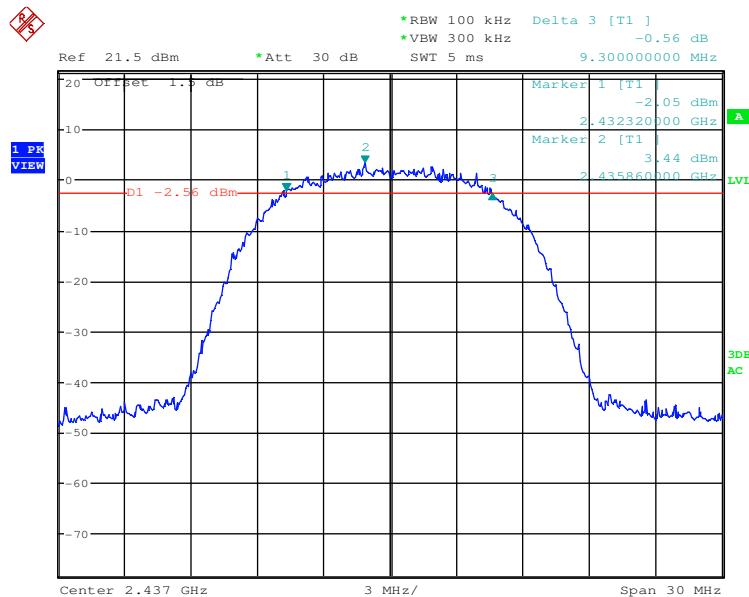


Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

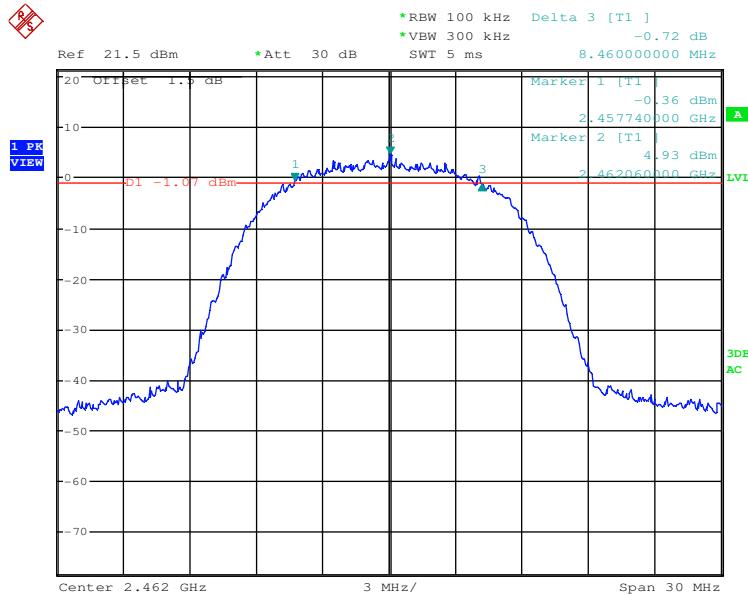


Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

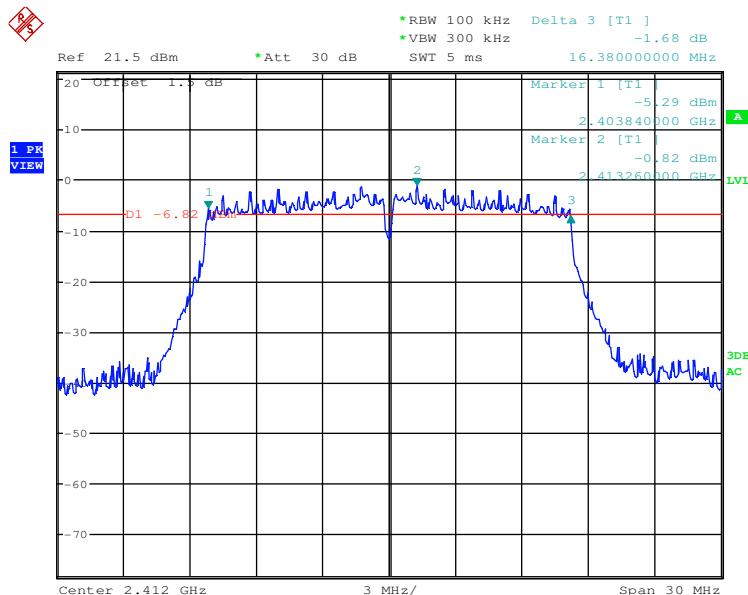


Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

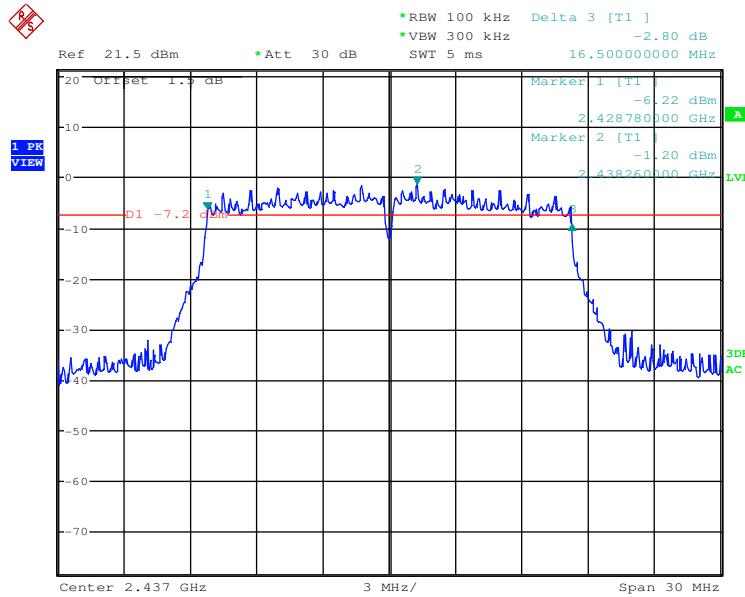


Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

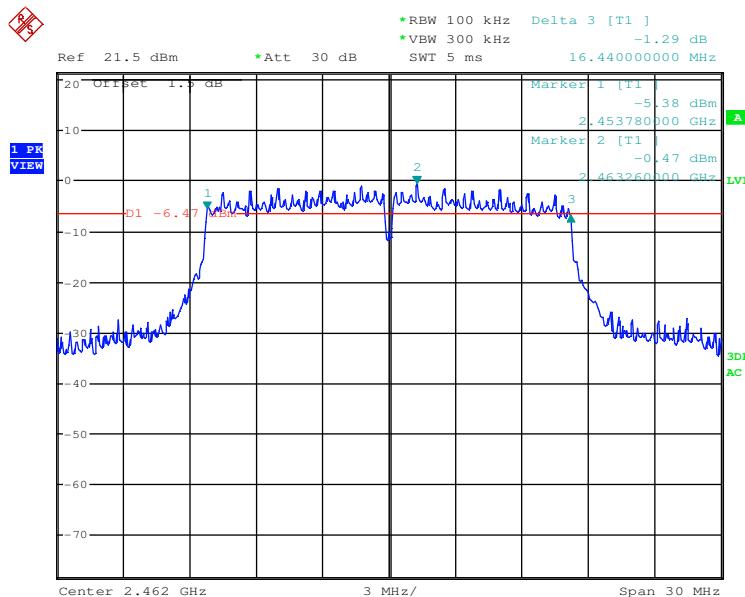


Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

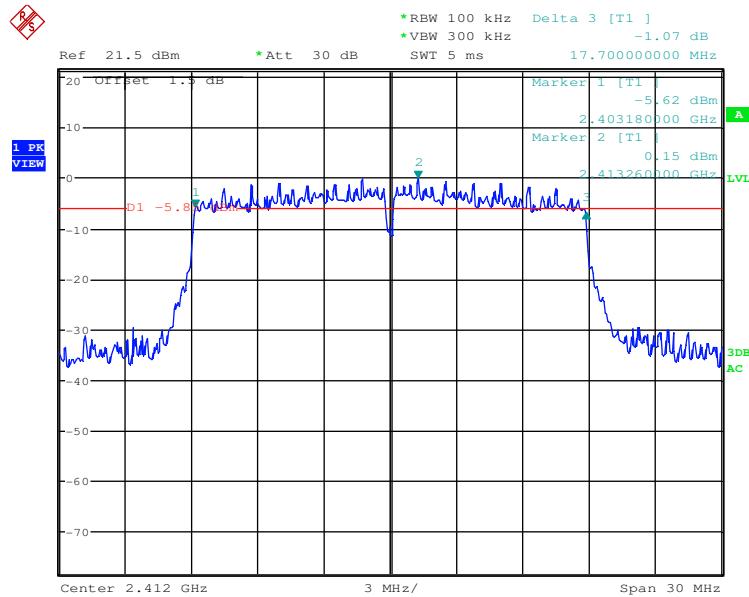


Test mode:	802.11n(HT20)	Test channel:	Middle
------------	---------------	---------------	--------

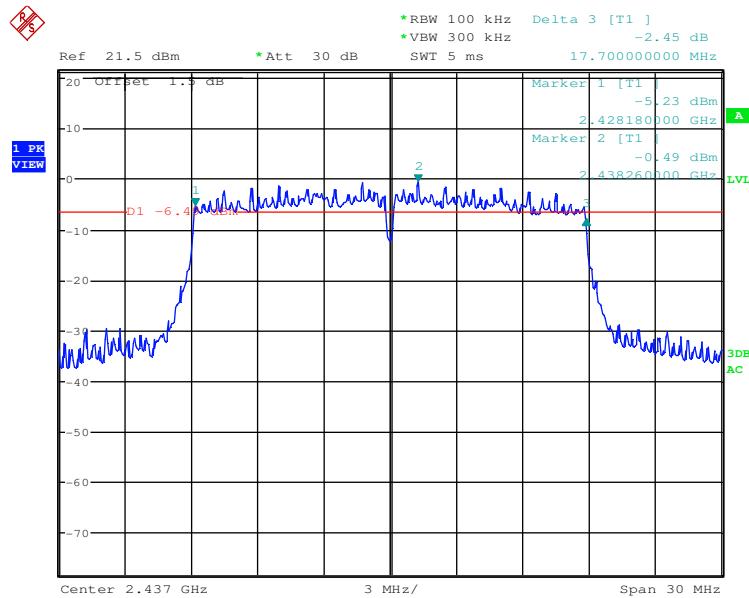


Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

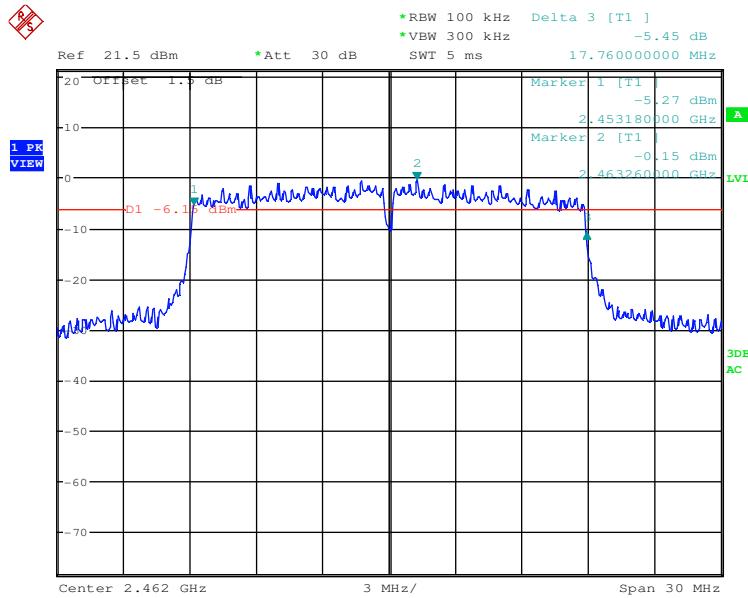


Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

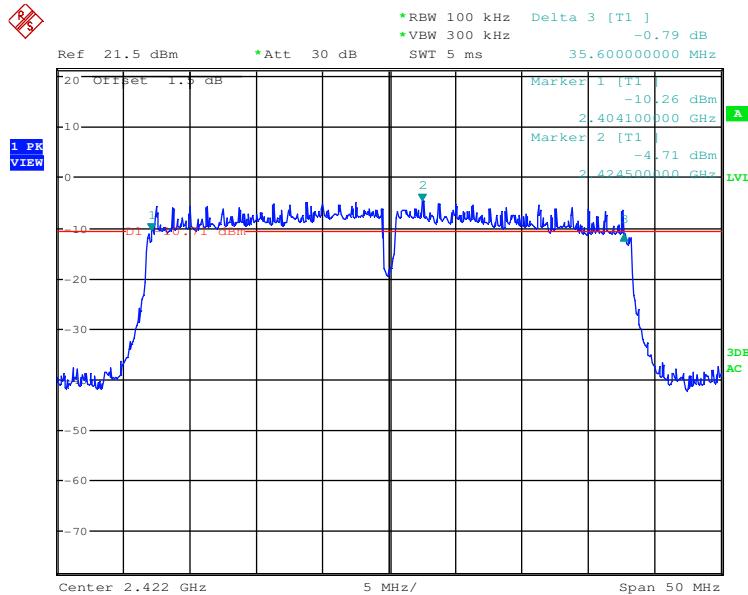


Test mode:	802.11n(HT40)	Test channel:	Middle
------------	---------------	---------------	--------

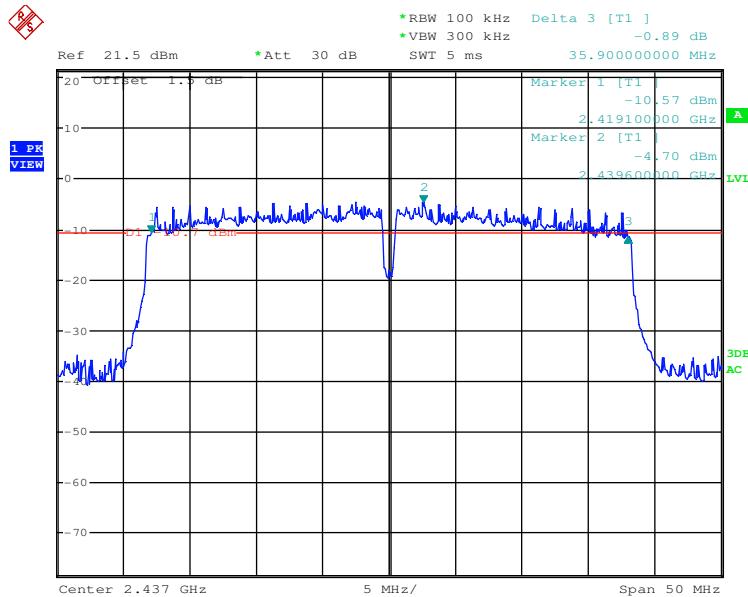

Test mode:	802.11n(HT40)	Test channel:	Highest
------------	---------------	---------------	---------

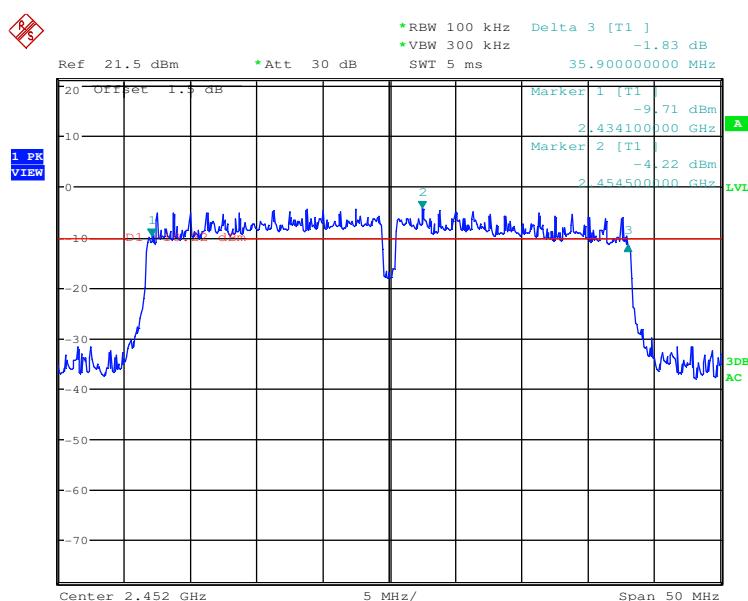

## 5.5 Power Spectral Density

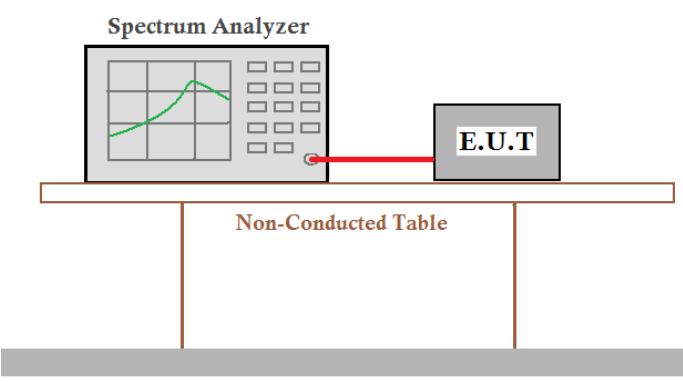Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	KDB558074 D01
Test Setup:	 <p><b>Spectrum Analyzer</b> E.U.T Non-Conducted Table Ground Reference Plane</p>
	<p><i>Remark:</i> <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Test Instruments:	Refer to section 4.10 for details
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n (HT20); 135Mbps of rate is the worst case of 802.11n (HT40).
Limit:	$\leq 8.00 \text{dBm}$
Test Results:	Pass

**Measurement Data**

802.11b mode			
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	-9.93	≤8.00	Pass
Middle	-11.05	≤8.00	Pass
Highest	-10.94	≤8.00	Pass

802.11g mode			
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	-15.15	≤8.00	Pass
Middle	-16.61	≤8.00	Pass
Highest	-15.35	≤8.00	Pass


802.11n(HT20) mode			
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	-14.48	≤8.00	Pass
Middle	-16.50	≤8.00	Pass
Highest	-15.55	≤8.00	Pass


802.11n(HT40) mode			
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result
Lowest	-18.67	≤8.00	Pass
Middle	-18.05	≤8.00	Pass
Highest	-17.08	≤8.00	Pass

**Test plot as follows:**


Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

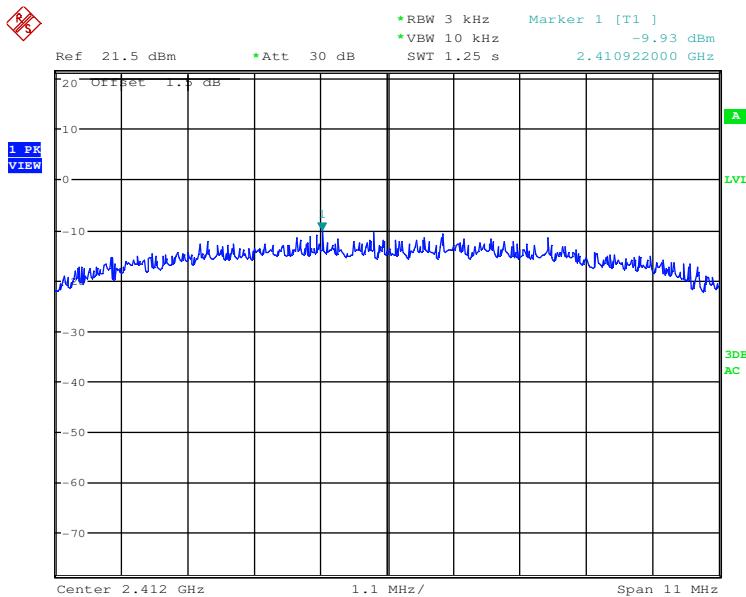


Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

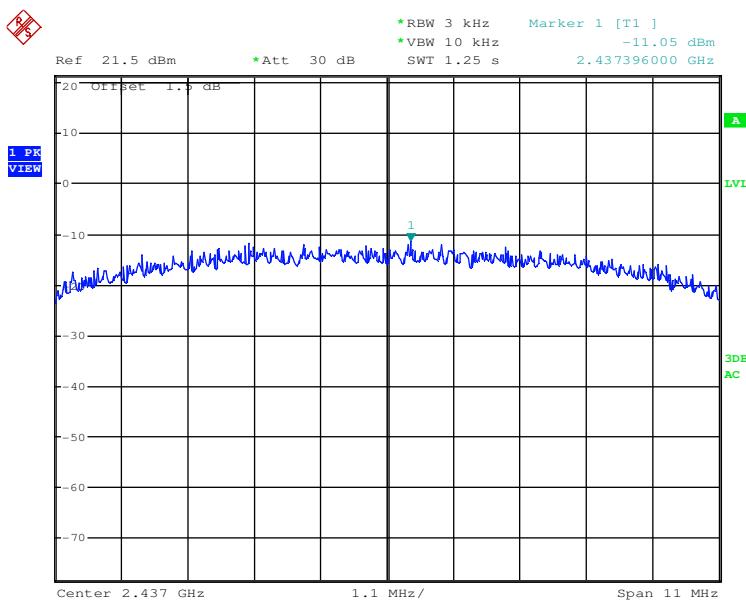


Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

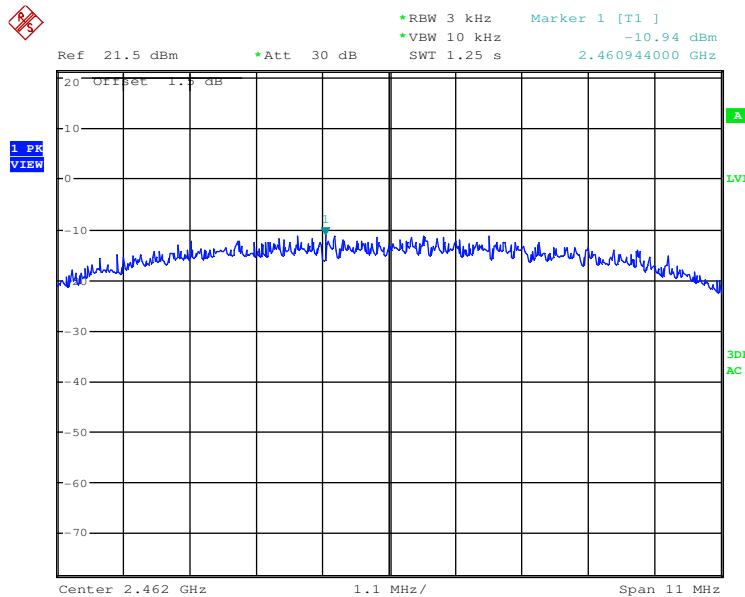


Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

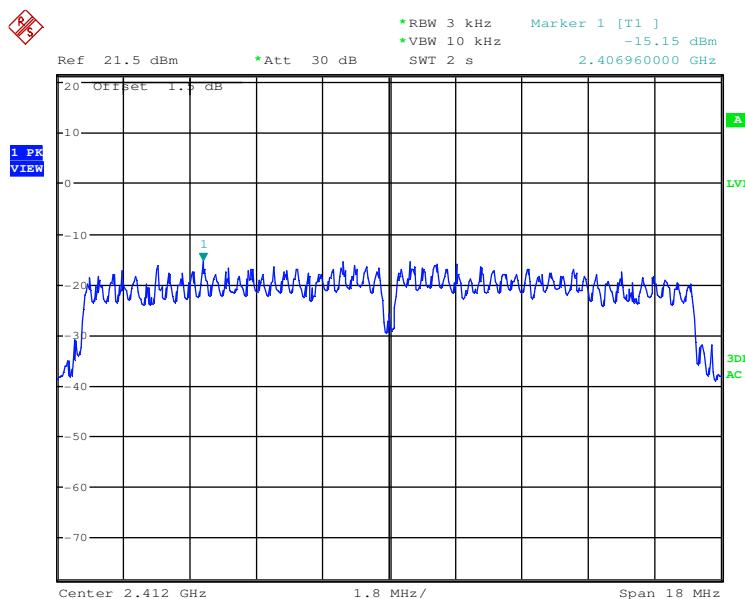


Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

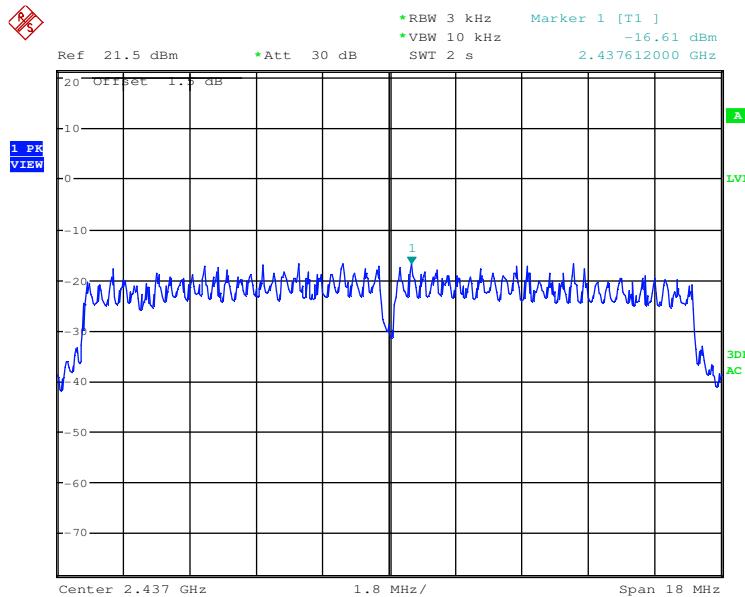


Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

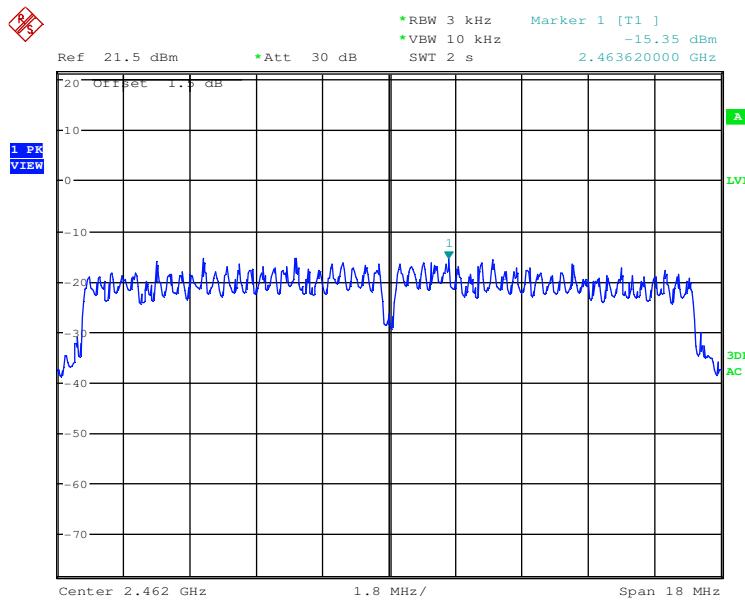


Test mode:	802.11n (HT20)	Test channel:	Lowest
------------	----------------	---------------	--------

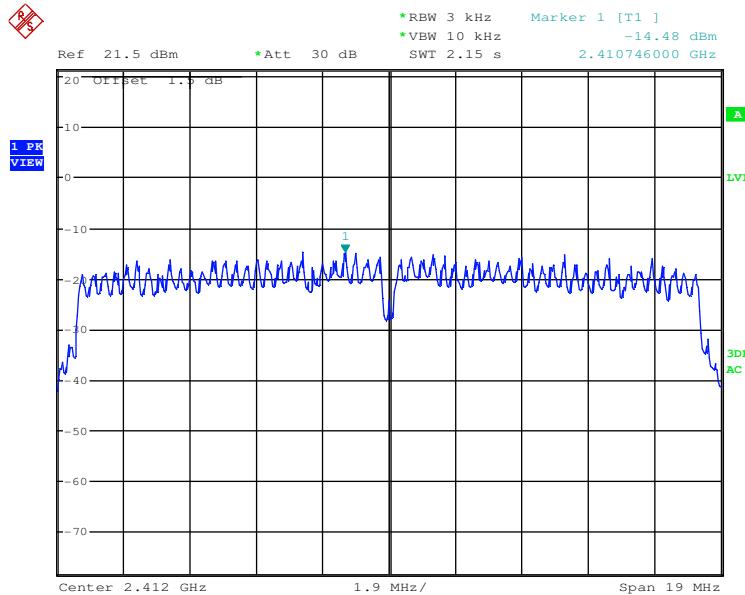


Test mode:	802.11n (HT20)	Test channel:	Middle
------------	----------------	---------------	--------

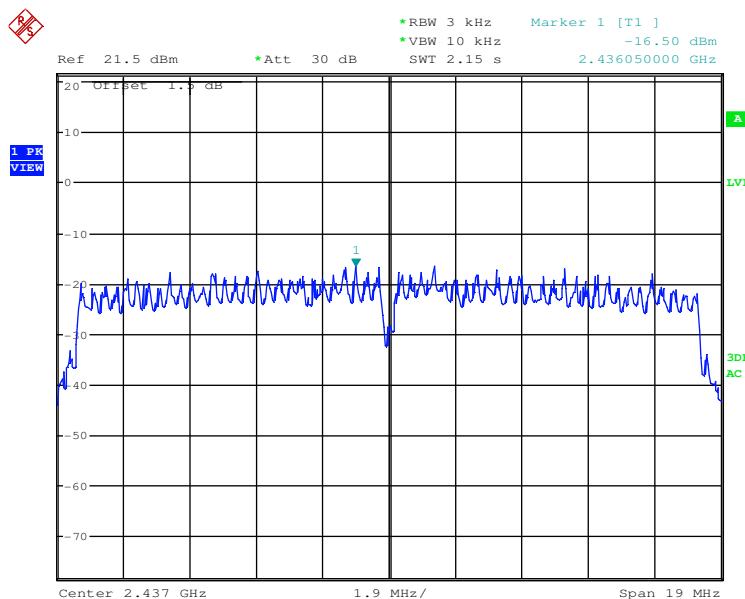


Test mode:	802.11n (HT20)	Test channel:	Highest
------------	----------------	---------------	---------

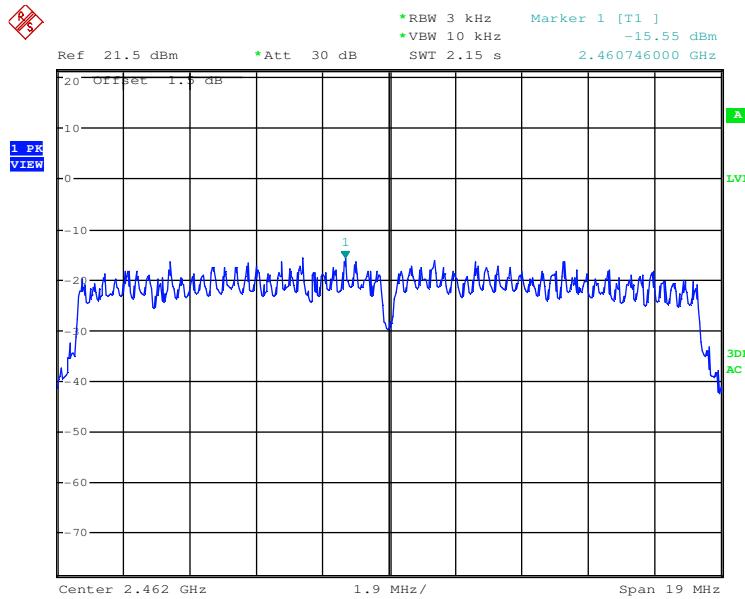


Test mode:	802.11n (HT40)	Test channel:	Lowest
------------	----------------	---------------	--------

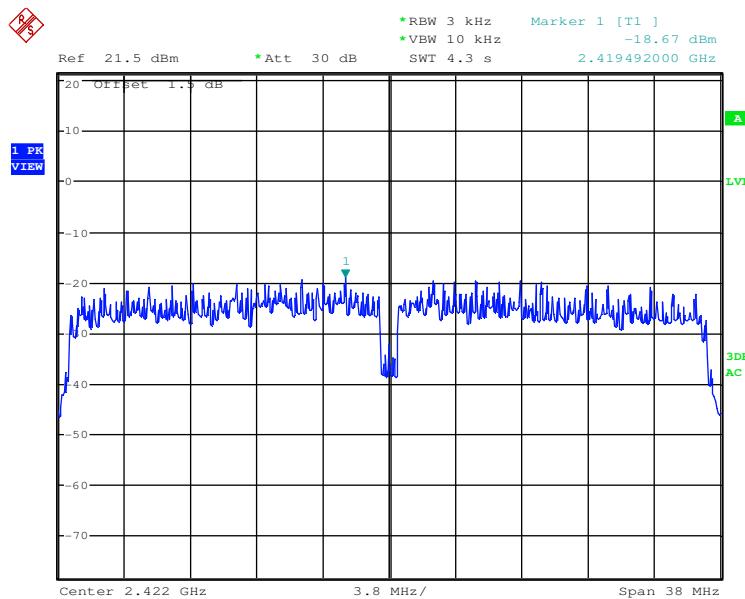


Test mode:	802.11n (HT40)	Test channel:	Middle
------------	----------------	---------------	--------

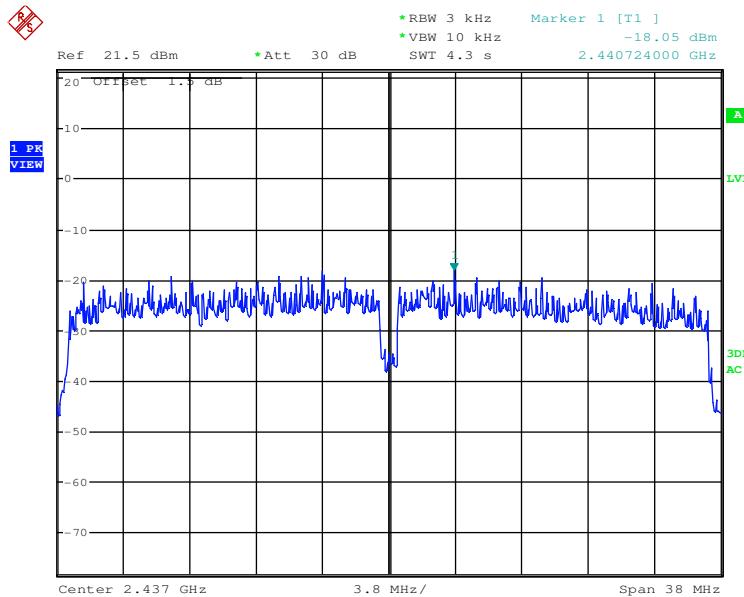

Test mode:	802.11n (HT40)	Test channel:	Highest
------------	----------------	---------------	---------

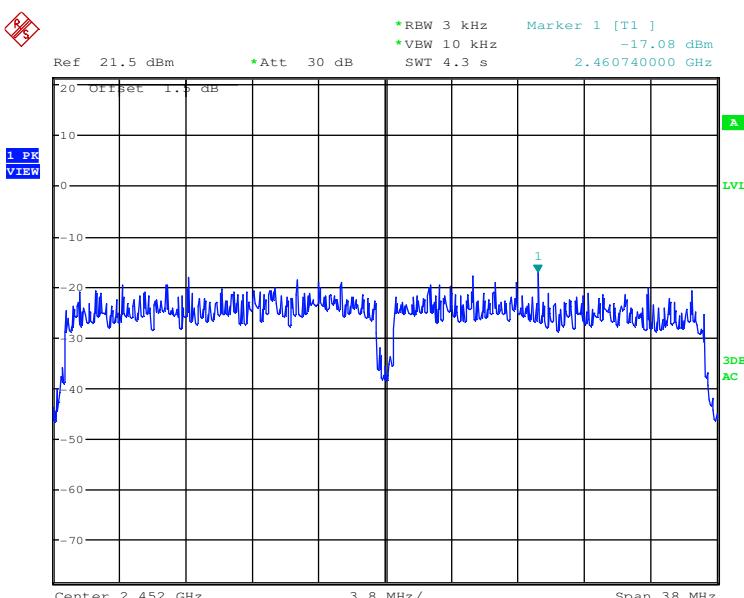


## 5.6 Band-edge for RF Conducted Emissions

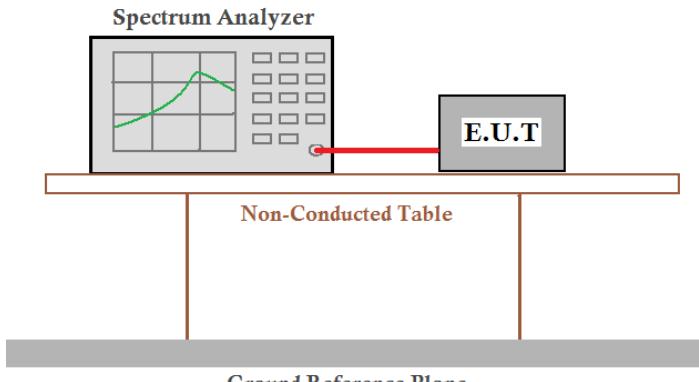
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	KDB558074 D01
Test Setup:	 <p><b>Spectrum Analyzer</b> E.U.T Non-Conducted Table Ground Reference Plane</p> <p><i>Remark:</i> <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n (HT20); 135Mbps of rate is the worst case of 802.11n (HT40).
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

**Test plot as follows:**


Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

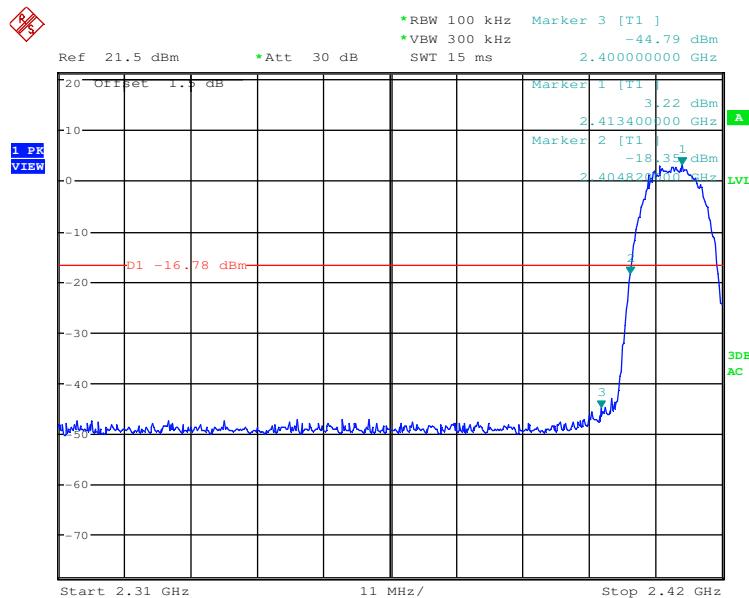


Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

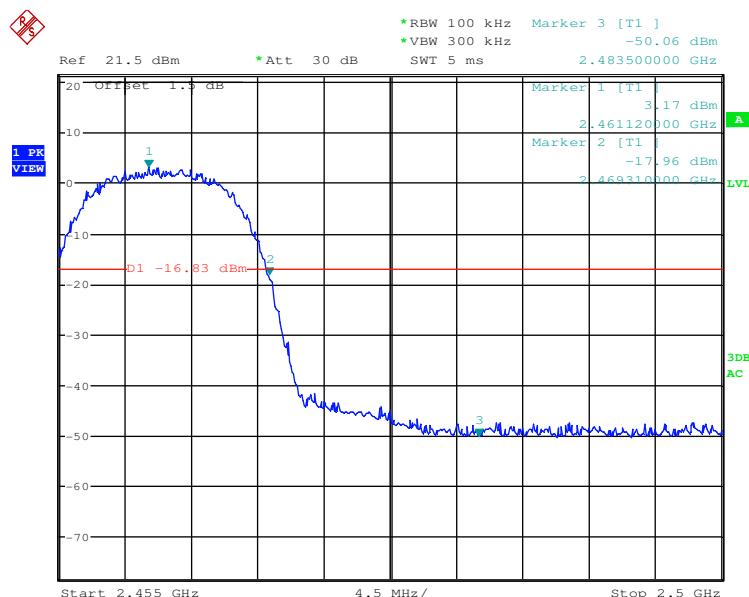


Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

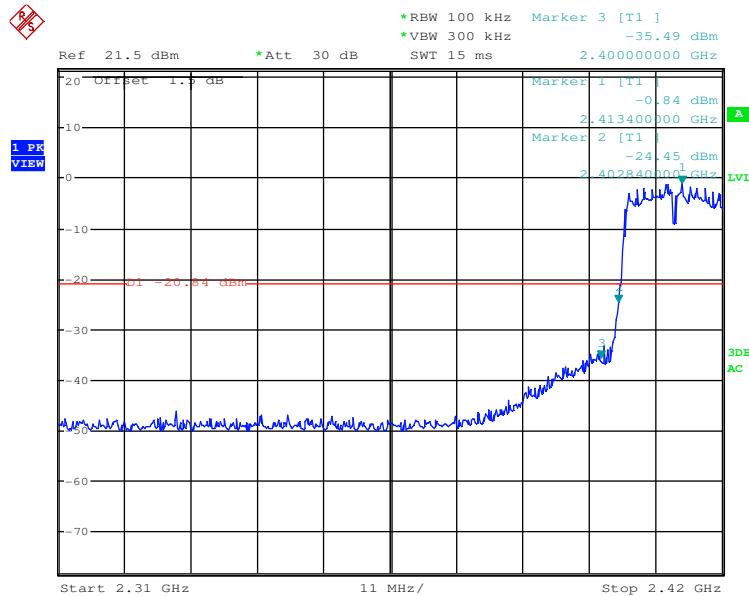


Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

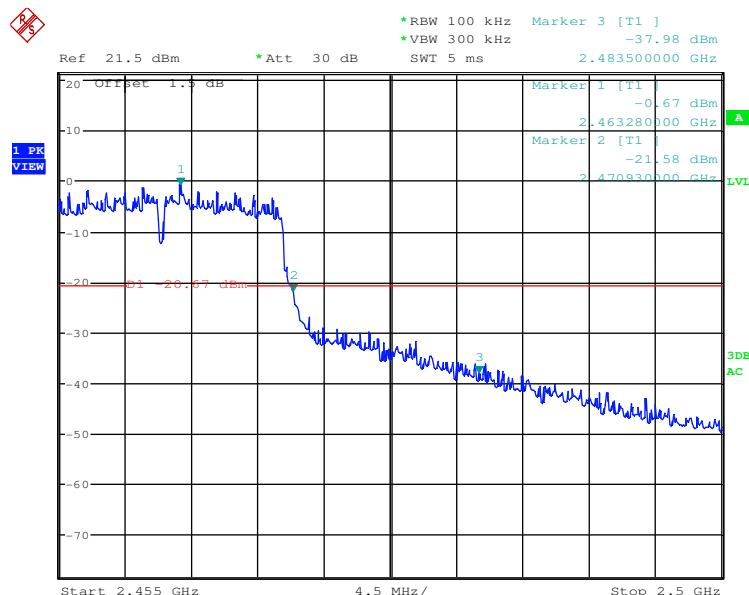


Test mode:	802.11n (HT20)	Test channel:	Lowest
------------	----------------	---------------	--------

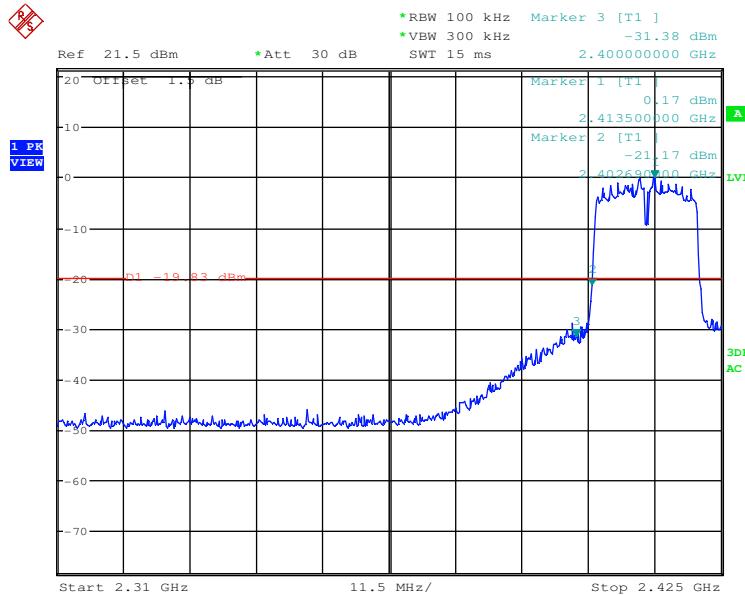


Test mode:	802.11n (HT20)	Test channel:	Highest
------------	----------------	---------------	---------

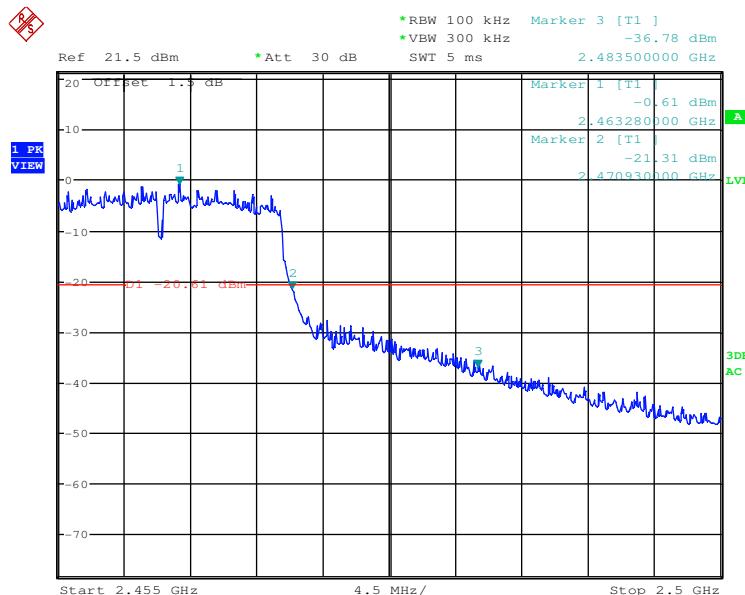

Test mode:	802.11n (HT40)	Test channel:	Lowest
------------	----------------	---------------	--------

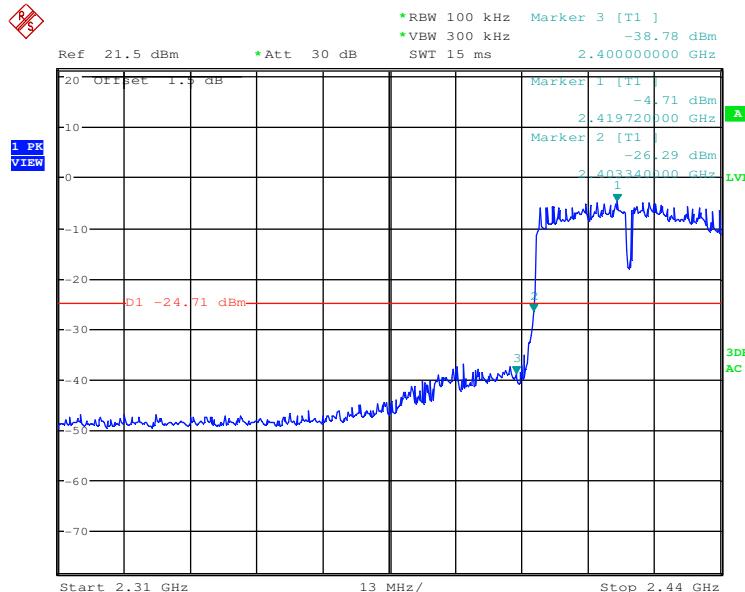


Test mode:	802.11n (HT40)	Test channel:	Highest
------------	----------------	---------------	---------

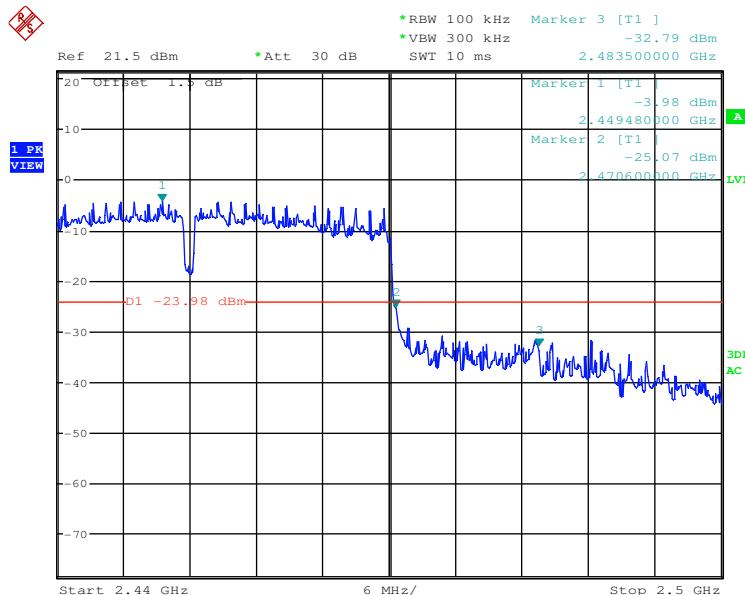


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 5.7 RF Conducted Spurious Emissions

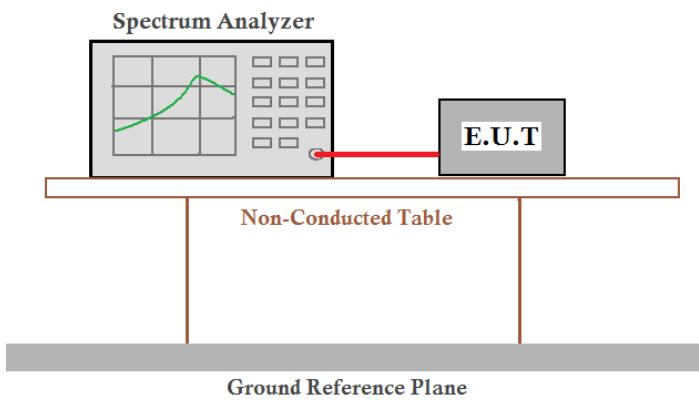
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	KDB558074 D01
Test Setup:	 <p><b>Spectrum Analyzer</b>  <b>E.U.T</b>  <b>Non-Conducted Table</b>  <b>Ground Reference Plane</b></p> <p><i>Remark:</i>  <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n (HT20); 135Mbps of rate is the worst case of 802.11n (HT40).
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

**Test plot as follows:**


Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

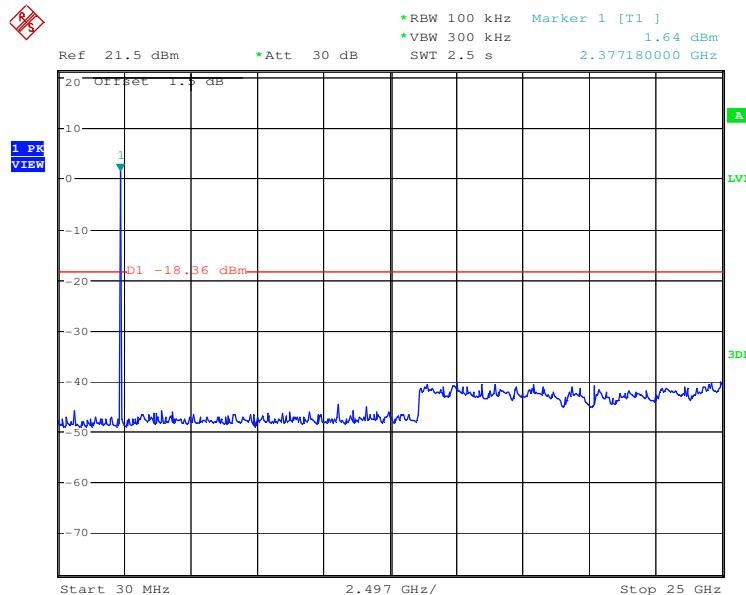


Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

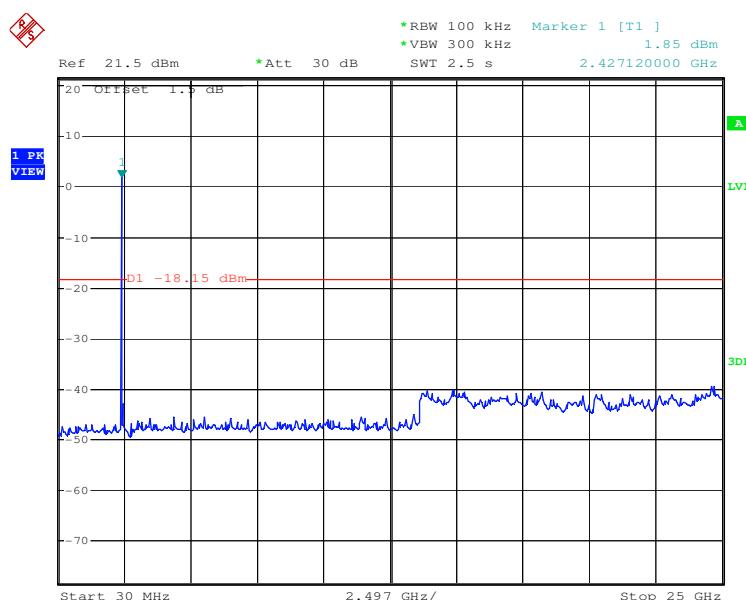


Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

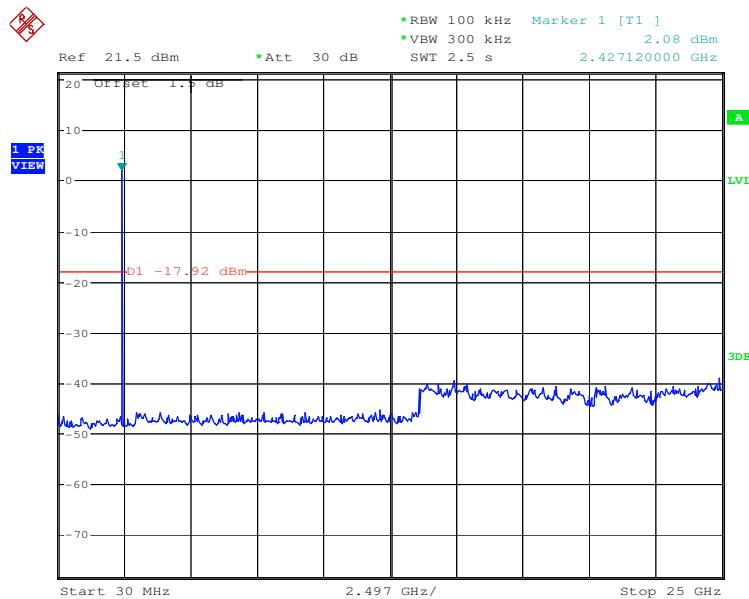


Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

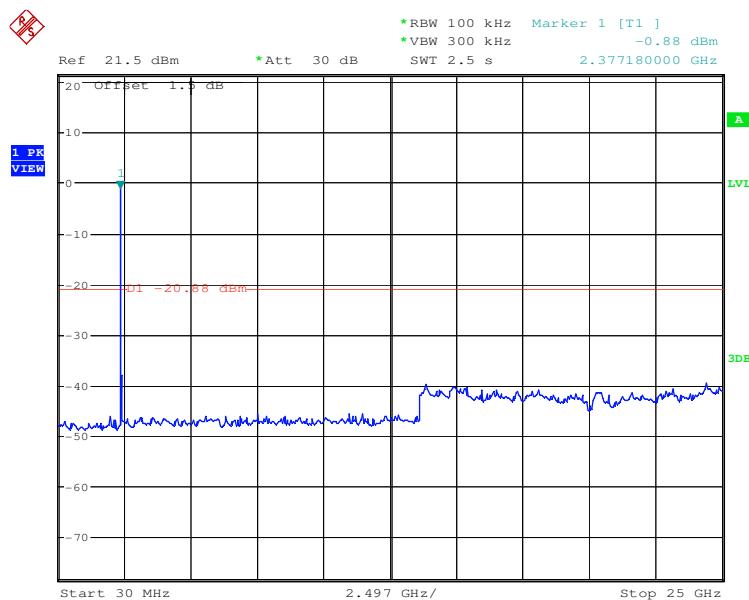


Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

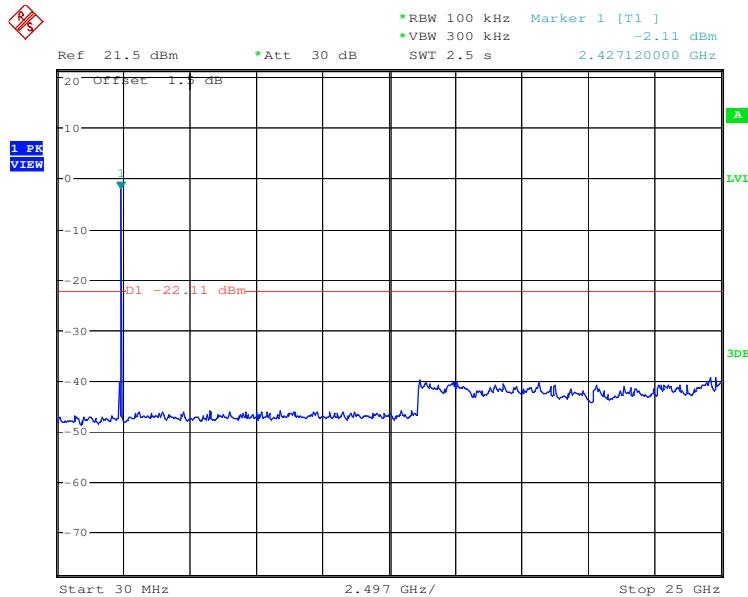


Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

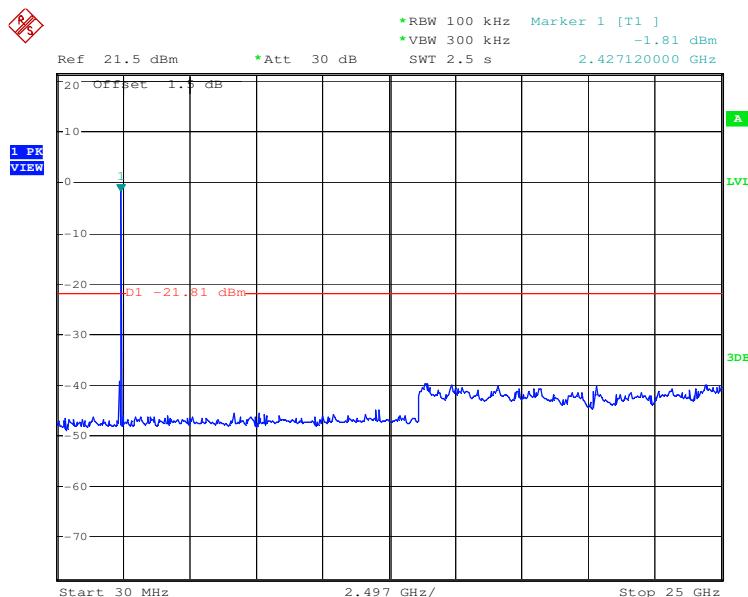


Test mode:	802.11n (HT20)	Test channel:	Lowest
------------	----------------	---------------	--------

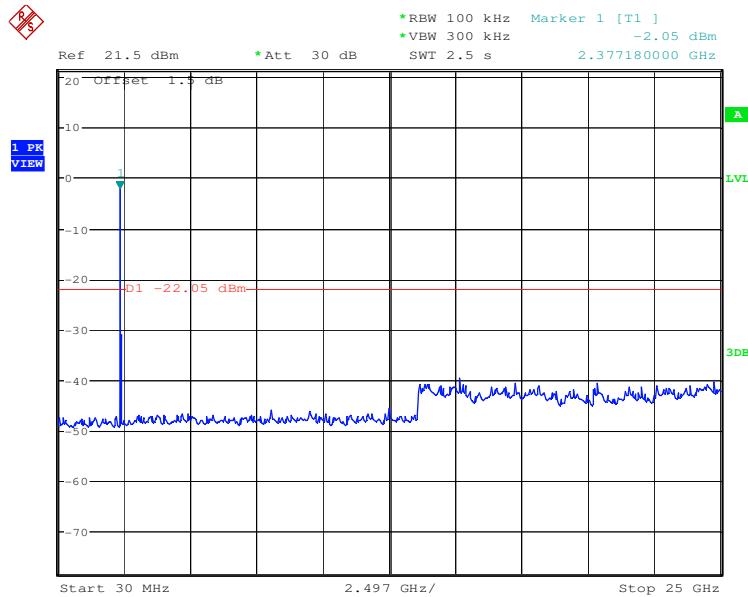


Test mode:	802.11n (HT20)	Test channel:	Middle
------------	----------------	---------------	--------

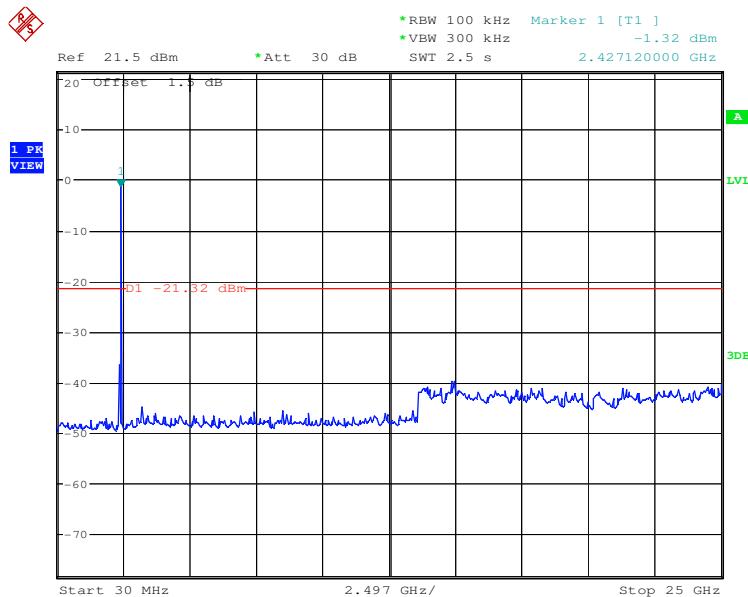


Test mode:	802.11n (HT20)	Test channel:	Highest
------------	----------------	---------------	---------

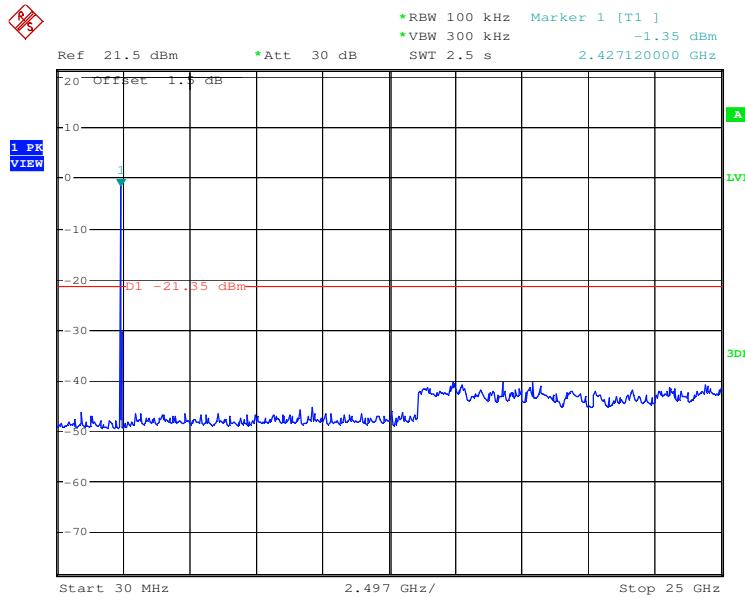


Test mode:	802.11n (HT40)	Test channel:	Lowest
------------	----------------	---------------	--------

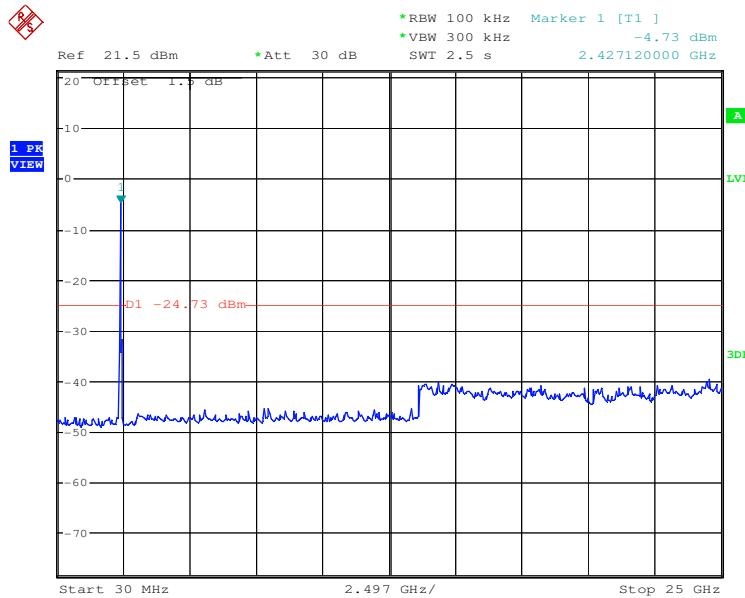

Test mode:	802.11n (HT40)	Test channel:	Middle
------------	----------------	---------------	--------

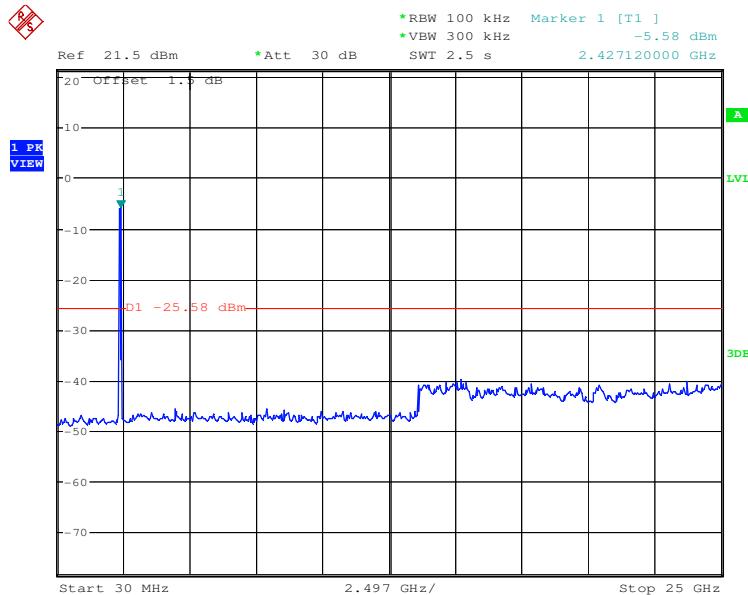

Test mode:	802.11n (HT40)	Test channel:	Highest
------------	----------------	---------------	---------

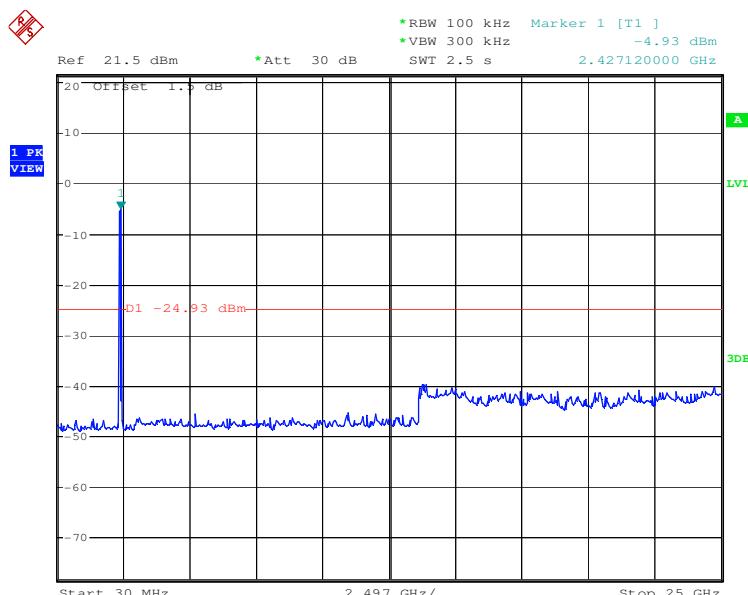

## 5.8 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2009				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

Test Setup:	
Figure 1. Below 30MHz	Figure 2. 30MHz to 1GHz
	Figure 3. Above 1 GHz
Test Procedure:	<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values</li> </ol>


\*This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

	<p>of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p>
Exploratory Test Mode:	Charge + Tx mode
Final Test Mode:	Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n (HT20); 135Mbps of rate is the worst case of 802.11n (HT40).
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass



**5.8.1 Radiated emission below 1GHz**

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

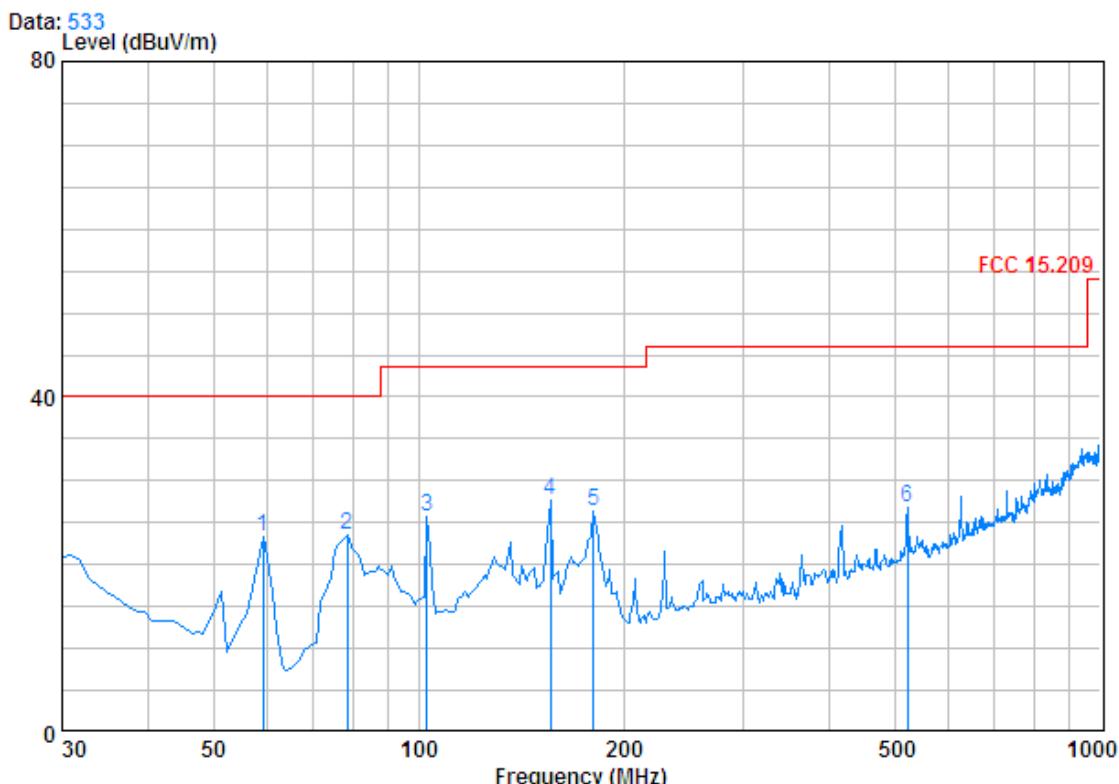


Condition : FCC 15.209 3m 3142C NEW VERTICAL

Job No. : 0778RF

Test mode : charge + TX mode

Freq	Cable		Antenna		Preamp		Read
	Loss	Factor	Factor	Factor	Level	Level	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB
1	59.100	0.80	5.46	27.27	44.25	23.24	40.00 -16.76
2	78.500	1.05	4.99	27.23	44.83	23.64	40.00 -16.36
3	102.750	1.21	6.85	27.18	44.75	25.63	43.50 -17.87
4	156.100	1.33	9.58	26.88	43.56	27.58	43.50 -15.92
5	180.350	1.37	6.70	26.77	45.06	26.36	43.50 -17.14
6	521.790	2.62	14.12	27.66	37.82	26.91	46.00 -19.09

Test mode:	Transmitting	Horizontal
------------	--------------	------------

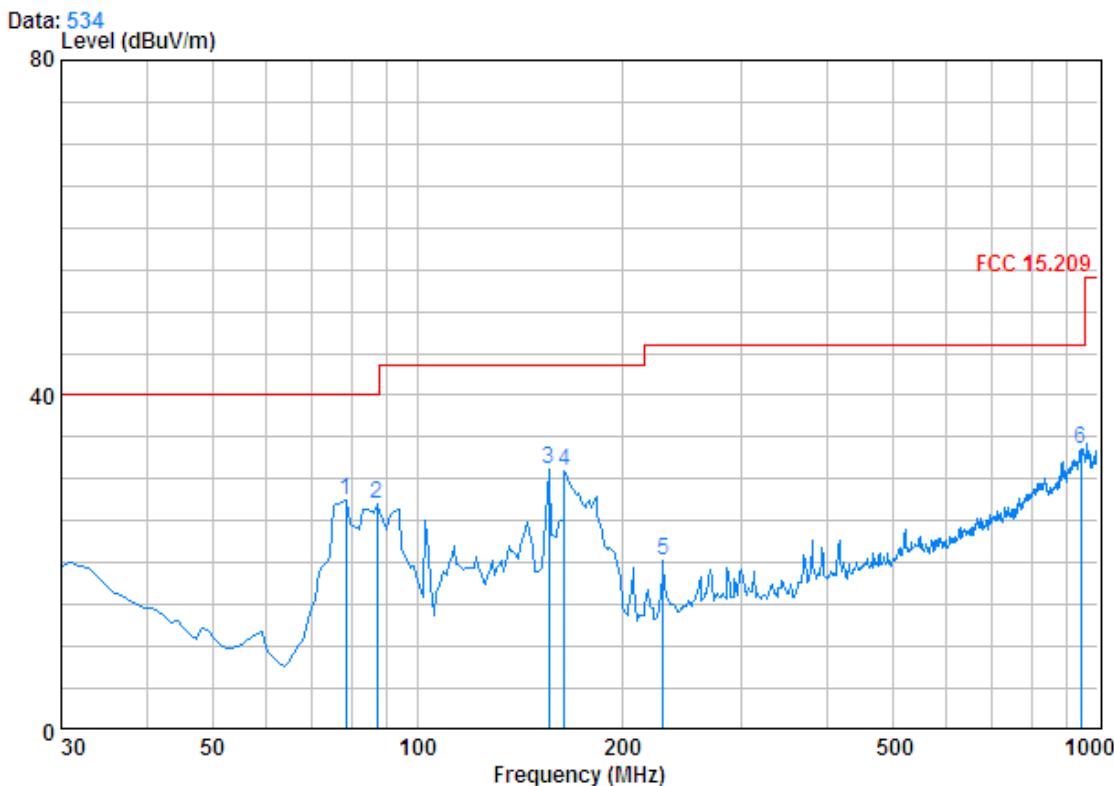

Condition : FCC 15.209 3m 3142C NEW HORIZONTAL

Job No. : 0778RF

Test mode : charge + TX mode

	Freq	Cable	Antenna	Preamp	Read	Limit	Over	
		Loss	Factor	Factor	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	78.500	1.05	4.99	27.23	48.74	27.55	40.00	-12.45
2	87.230	1.10	5.99	27.22	47.21	27.09	40.00	-12.91
3 @	156.100	1.33	9.58	26.88	47.17	31.20	43.50	-12.30
4	164.830	1.35	9.50	26.84	47.02	31.03	43.50	-12.47
5	229.820	1.57	8.02	26.59	37.38	20.37	46.00	-25.63
6	943.740	3.65	20.87	26.58	35.74	33.67	46.00	-12.33

**5.8.2 Transmitter emission above 1GHz**

Test mode:	802.11b		Test channel:		Lowest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
2810.846	3.21	33.14	40.16	47.89	44.08	74	-29.92	Vertical	
3662.775	3.87	33.41	40.79	49.76	46.25	74	-27.75	Vertical	
4366.067	4.41	34.83	41.30	49.02	46.96	74	-27.04	Vertical	
6094.137	5.15	35.82	40.84	49.91	50.04	74	-23.96	Vertical	
7099.747	5.64	35.84	39.97	50.08	51.59	74	-22.41	Vertical	
10999.950	6.22	38.50	37.86	45.78	52.64	74	-21.36	Vertical	
2617.477	3.10	32.86	40.02	48.31	44.25	74	-29.75	Horizontal	
3625.669	3.84	33.34	40.76	49.07	45.49	74	-28.51	Horizontal	
5352.186	4.90	34.75	41.48	48.97	47.14	74	-26.86	Horizontal	
6696.010	5.31	36.11	40.31	49.31	50.42	74	-23.58	Horizontal	
7941.185	6.21	36.00	39.24	48.02	50.99	74	-23.01	Horizontal	
11112.520	6.25	38.48	37.91	46.27	53.09	74	-20.91	Horizontal	

Test mode:	802.11b		Test channel:		Middle		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
2868.674	3.24	33.21	40.20	49.01	45.26	74	-28.74	Vertical	
3700.260	3.91	33.45	40.81	50.25	46.80	74	-27.20	Vertical	
4547.561	4.53	35.12	41.44	49.38	47.59	74	-26.41	Vertical	
5850.919	5.07	35.45	41.06	49.59	49.05	74	-24.95	Vertical	
7547.013	6.17	36.00	39.57	48.57	51.17	74	-22.83	Vertical	
10374.420	6.06	38.14	37.60	45.90	52.50	74	-21.50	Vertical	
2726.283	3.16	33.03	40.10	47.02	43.11	74	-30.89	Horizontal	
4107.316	4.23	34.13	41.12	48.93	46.17	74	-27.83	Horizontal	
5560.500	4.97	34.98	41.30	48.55	47.20	74	-26.80	Horizontal	
7394.878	6.00	35.96	39.71	47.90	50.15	74	-23.85	Horizontal	
9636.161	5.99	37.34	37.76	45.68	51.25	74	-22.75	Horizontal	
11486.410	6.34	38.40	38.06	45.99	52.67	74	-21.33	Horizontal	

\*This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Test mode:		802.11b		Test channel:		Highest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)		Polarization	
3026.195	3.33	33.39	40.33	48.34	44.73	74	-29.27		Vertical	
3738.129	3.95	33.49	40.84	49.08	45.68	74	-28.32		Vertical	
4501.492	4.49	35.20	41.40	48.63	46.92	74	-27.08		Vertical	
6109.670	5.15	35.84	40.83	48.81	48.97	74	-25.03		Vertical	
8549.586	6.18	36.24	38.72	46.94	50.64	74	-23.36		Vertical	
11457.210	6.34	38.41	38.05	46.23	52.93	74	-21.07		Vertical	
2957.654	3.29	33.33	40.27	47.28	43.63	74	-30.37		Horizontal	
3728.625	3.93	33.49	40.84	47.67	44.25	74	-29.75		Horizontal	
4772.910	4.67	34.76	41.61	48.43	46.25	74	-27.75		Horizontal	
6047.776	5.14	35.76	40.87	48.69	48.72	74	-25.28		Horizontal	
7781.104	6.22	36.00	39.38	47.61	50.45	74	-23.55		Horizontal	
10453.950	6.09	38.24	37.64	45.39	52.08	74	-21.92		Horizontal	

Test mode:		802.11g		Test channel:		Lowest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)		Polarization	
3049.394	3.35	33.38	40.34	48.90	45.29	74	-28.71		Vertical	
4055.371	4.20	33.99	41.08	49.16	46.27	74	-27.73		Vertical	
5244.295	4.86	34.65	41.58	50.22	48.15	74	-25.85		Vertical	
6816.394	5.35	35.99	40.22	49.37	50.49	74	-23.51		Vertical	
8703.294	6.17	36.36	38.59	46.42	50.36	74	-23.64		Vertical	
11112.520	6.25	38.48	37.91	45.95	52.77	74	-21.23		Vertical	
2818.011	3.22	33.14	40.17	47.80	43.99	74	-30.01		Horizontal	
3625.669	3.84	33.34	40.76	50.70	47.12	74	-26.88		Horizontal	
4688.616	4.61	34.90	41.54	48.36	46.33	74	-27.67		Horizontal	
6331.329	5.21	36.10	40.63	48.11	48.79	74	-25.21		Horizontal	
8703.294	6.17	36.36	38.59	46.53	50.47	74	-23.53		Horizontal	
11226.250	6.28	38.45	37.95	45.99	52.77	74	-21.23		Horizontal	



Test mode:	802.11g		Test channel:		Middle	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3143.979	3.44	33.34	40.41	47.65	44.02	74	-29.98	Vertical
4288.958	4.35	34.59	41.25	48.67	46.36	74	-27.64	Vertical
5532.263	4.96	34.96	41.32	48.45	47.05	74	-26.95	Vertical
7301.355	5.90	35.92	39.79	47.37	49.40	74	-24.60	Vertical
9370.083	6.05	37.03	37.99	47.38	52.47	74	-21.53	Vertical
11515.680	6.35	38.42	38.07	45.55	52.25	74	-21.75	Vertical
2898.032	3.26	33.26	40.23	48.17	44.46	74	-29.54	Horizontal
4310.849	4.36	34.69	41.26	48.13	45.92	74	-28.08	Horizontal
5617.407	4.99	35.09	41.25	48.57	47.40	74	-26.60	Horizontal
7099.747	5.64	35.84	39.97	48.81	50.32	74	-23.68	Horizontal
9759.591	5.98	37.46	37.66	46.00	51.78	74	-22.22	Horizontal
12024.960	6.47	38.93	38.28	46.08	53.20	74	-20.80	Horizontal



Test mode:		802.11g		Test channel:	Highest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
3700.260	3.91	33.45	40.81	49.82	46.37	74	-27.63	Vertical	
4772.910	4.67	34.76	41.61	48.75	46.57	74	-27.43	Vertical	
6219.512	5.19	35.96	40.73	48.89	49.31	74	-24.69	Vertical	
7624.250	6.23	36.00	39.51	48.30	51.02	74	-22.98	Vertical	
8703.294	6.17	36.36	38.59	46.82	50.76	74	-23.24	Vertical	
11112.520	6.25	38.48	37.91	46.20	53.02	74	-20.98	Vertical	
2782.371	3.20	33.10	40.14	47.57	43.73	74	-30.27	Horizontal	
3700.260	3.91	33.45	40.81	49.24	45.79	74	-28.21	Horizontal	
4983.987	4.77	34.43	41.77	48.27	45.70	74	-28.30	Horizontal	
6974.358	5.50	35.83	40.08	48.67	49.92	74	-24.08	Horizontal	
9441.913	6.03	37.14	37.94	46.30	51.53	74	-22.47	Horizontal	
11486.410	6.34	38.40	38.06	46.12	52.80	74	-21.20	Horizontal	

Test mode:		802.11n (HT20)		Test channel:	Lowest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
2935.153	3.28	33.31	40.26	47.76	44.09	74	-29.91	Vertical	
3700.260	3.91	33.45	40.81	49.50	46.05	74	-27.95	Vertical	
4772.910	4.67	34.76	41.61	48.81	46.63	74	-27.37	Vertical	
5865.832	5.08	35.48	41.04	49.38	48.90	74	-25.10	Vertical	
7470.558	6.08	35.99	39.64	48.62	51.05	74	-22.95	Vertical	
10999.950	6.22	38.50	37.86	45.57	52.43	74	-21.57	Vertical	
2868.674	3.24	33.21	40.20	48.95	45.20	74	-28.80	Horizontal	
4055.371	4.20	33.99	41.08	49.20	46.31	74	-27.69	Horizontal	
5086.523	4.81	34.48	41.71	49.56	47.14	74	-26.86	Horizontal	
5850.919	5.07	35.45	41.06	50.43	49.89	74	-24.11	Horizontal	
7394.878	6.00	35.96	39.71	49.27	51.52	74	-22.48	Horizontal	
10480.590	6.09	38.28	37.65	45.25	51.97	74	-22.03	Horizontal	



Test mode:		802.11n (HT20)		Test channel:	Middle		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
2761.204	3.18	33.07	40.13	47.83	43.95	74	-30.05	Vertical	
3662.775	3.87	33.41	40.79	49.78	46.27	74	-27.73	Vertical	
4772.910	4.67	34.76	41.61	49.00	46.82	74	-27.18	Vertical	
6094.137	5.15	35.82	40.84	49.74	49.87	74	-24.13	Vertical	
7470.558	6.08	35.99	39.64	48.81	51.24	74	-22.76	Vertical	
11574.460	6.36	38.47	38.10	46.46	53.19	74	-20.81	Vertical	
2558.193	3.07	32.79	39.98	50.94	46.82	74	-27.18	Horizontal	
3662.775	3.87	33.41	40.79	50.40	46.89	74	-27.11	Horizontal	
4501.492	4.49	35.20	41.40	49.46	47.75	74	-26.25	Horizontal	
5850.919	5.07	35.45	41.06	50.74	50.20	74	-23.80	Horizontal	
7566.249	6.19	36.00	39.56	49.34	51.97	74	-22.03	Horizontal	
10778.210	6.17	38.41	37.77	45.55	52.36	74	-21.64	Horizontal	

Test mode:		802.11n (HT20)		Test channel:	Highest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
2875.986	3.25	33.21	40.21	49.18	45.43	74	-28.57	Vertical	
3625.669	3.84	33.34	40.76	49.62	46.04	74	-27.96	Vertical	
4547.561	4.53	35.12	41.44	49.40	47.61	74	-26.39	Vertical	
6032.401	5.13	35.74	40.89	49.40	49.38	74	-24.62	Vertical	
8042.903	6.20	36.01	39.15	48.47	51.53	74	-22.47	Vertical	
10480.590	6.09	38.28	37.65	45.83	52.55	74	-21.45	Vertical	
2644.264	3.12	32.91	40.05	47.99	43.97	74	-30.03	Horizontal	
4582.422	4.55	35.06	41.47	49.34	47.48	74	-26.52	Horizontal	
5865.832	5.08	35.48	41.04	49.22	48.74	74	-25.26	Horizontal	
6903.705	5.45	35.90	40.13	50.76	51.98	74	-22.02	Horizontal	
8703.294	6.17	36.36	38.59	47.58	51.52	74	-22.48	Horizontal	
10999.950	6.22	38.50	37.86	46.53	53.39	74	-20.61	Horizontal	



Test mode:		802.11n (HT40)		Test channel:	Lowest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
3018.502	3.33	33.39	40.31	48.50	44.91	74	-29.09	Vertical	
4223.950	4.31	34.45	41.21	49.00	46.55	74	-27.45	Vertical	
5617.407	4.99	35.09	41.25	48.69	47.52	74	-26.48	Vertical	
6921.301	5.47	35.89	40.12	48.69	49.93	74	-24.07	Vertical	
9370.083	6.05	37.03	37.99	45.78	50.87	74	-23.13	Vertical	
11812.580	6.42	38.71	38.20	46.50	53.43	74	-20.57	Vertical	
3112.129	3.41	33.36	40.38	49.34	45.73	74	-28.27	Horizontal	
3662.775	3.87	33.41	40.79	51.43	47.92	74	-26.08	Horizontal	
4871.103	4.72	34.59	41.68	48.95	46.58	74	-27.42	Horizontal	
6412.427	5.23	36.18	40.56	49.36	50.21	74	-23.79	Horizontal	
8002.061	6.21	36.00	39.18	47.55	50.58	74	-23.42	Horizontal	
10480.590	6.09	38.28	37.65	46.12	52.84	74	-21.16	Horizontal	

Test mode:		802.11n (HT40)		Test channel:	Middle		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
3151.992	3.44	33.34	40.41	47.85	44.22	74	-29.78	Vertical	
3700.260	3.91	33.45	40.81	49.56	46.11	74	-27.89	Vertical	
5393.215	4.92	34.78	41.45	48.37	46.62	74	-27.38	Vertical	
6764.538	5.33	36.04	40.27	49.53	50.63	74	-23.37	Vertical	
8615.126	6.17	36.29	38.65	46.97	50.78	74	-23.22	Vertical	
11112.520	6.25	38.48	37.91	45.61	52.43	74	-21.57	Vertical	
2733.232	3.17	33.03	40.10	48.23	44.33	74	-29.67	Horizontal	
3283.018	3.55	33.29	40.51	48.98	45.31	74	-28.69	Horizontal	
4366.067	4.41	34.83	41.30	48.85	46.79	74	-27.21	Horizontal	
6032.401	5.13	35.74	40.89	48.79	48.77	74	-25.23	Horizontal	
8104.559	6.20	36.04	39.10	48.75	51.89	74	-22.11	Horizontal	
10888.510	6.19	38.46	37.81	45.68	52.52	74	-21.48	Horizontal	

Test mode:		802.11n (HT40)		Test channel:	Highest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2832.394	3.22	33.17	40.17	47.29	43.51	74	-30.49	Vertical
3653.463	3.87	33.39	40.79	49.47	45.94	74	-28.06	Vertical
5047.827	4.79	34.45	41.75	48.51	46.00	74	-28.00	Vertical
6662.007	5.30	36.14	40.35	47.63	48.72	74	-25.28	Vertical
8859.766	6.16	36.48	38.44	45.69	49.89	74	-24.11	Vertical
10888.510	6.19	38.46	37.81	44.93	51.77	74	-22.23	Vertical
2705.543	3.15	32.98	40.09	49.44	45.48	74	-28.52	Horizontal
3903.444	4.08	33.70	40.97	48.97	45.78	74	-28.22	Horizontal
5191.168	4.84	34.60	41.62	48.92	46.74	74	-27.26	Horizontal
6494.564	5.26	36.28	40.50	50.10	51.14	74	-22.86	Horizontal
8441.459	6.18	36.18	38.80	47.72	51.28	74	-22.72	Horizontal
11140.850	6.26	38.47	37.92	46.40	53.21	74	-20.79	Horizontal

**Remark:**

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 2) The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

## 5.9 Band Edge (Radiated Emission)


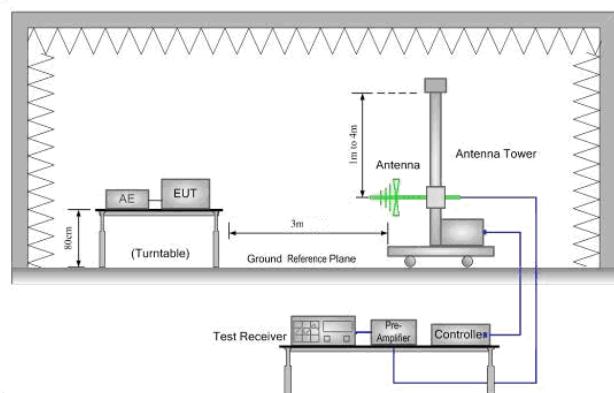
Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10 2009		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:	 		

Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

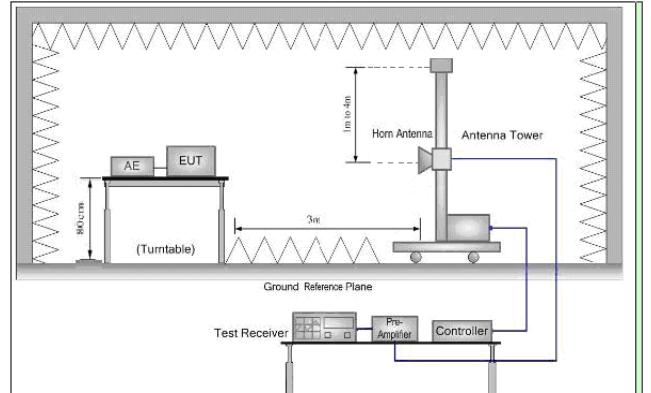


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Test Procedure:	<ol style="list-style-type: none"><li>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li><li>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li><li>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li><li>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li><li>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li><li>f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li><li>g. Test the EUT in the lowest channel , the Highest channel</li><li>h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</li><li>i. Repeat above procedures until all frequencies measured was complete.</li></ol>
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 54Mbps of rate is the worst case of 802.11g; 65Mbps of rate is the worst case of 802.11n (HT20); 135Mbps of rate is the worst case of 802.11n (HT40).
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

**Test plot as follows:**

Test plan as follows:

Worse case mode:	802.11b	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	---------	---------------	--------	---------	------	----------

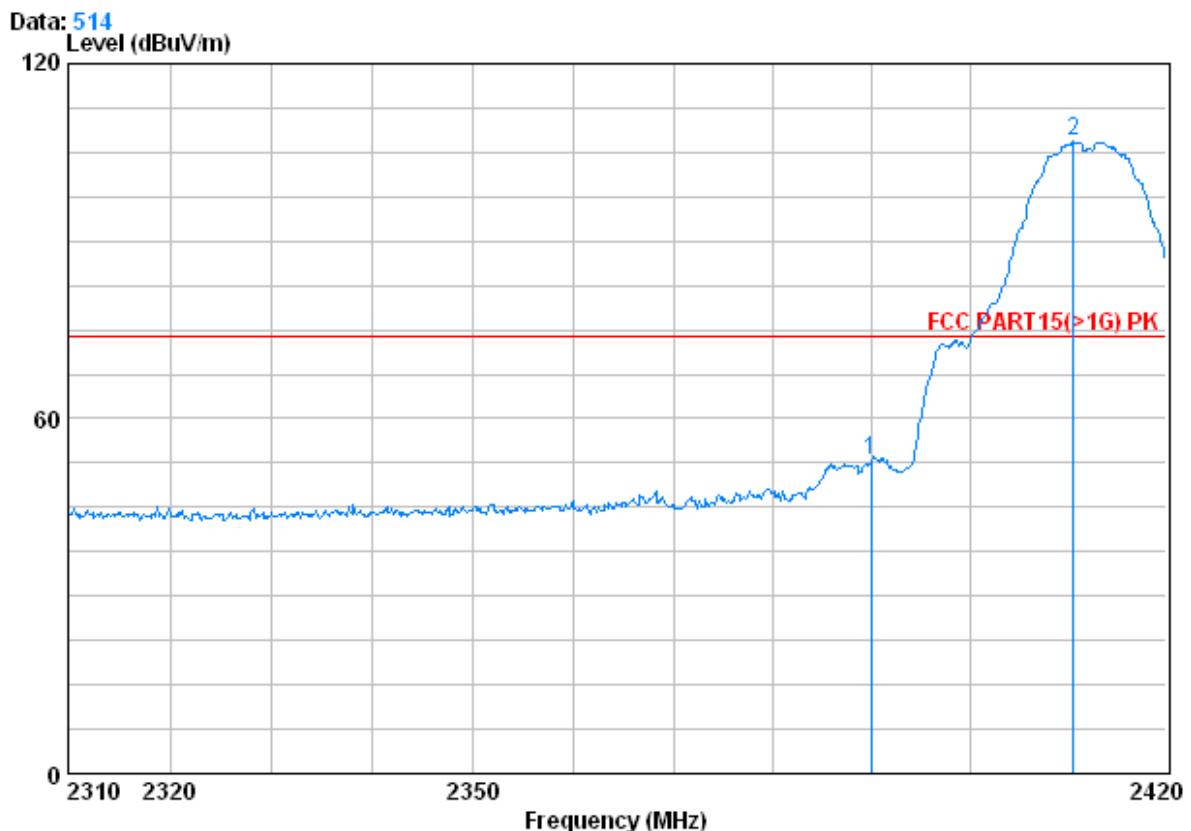


Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 0778RF

Test mode : B 2412 Bandedge

Freq	Cable	Antenna	Preamp	Read	Limit	Over		
	Loss	Factor	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuW	dBuW/m	dBuW/m	dB
1	2390.000	2.98	32.51	39.85	57.27	52.92	74.00	-21.08
2 X	2410.540	2.99	32.54	39.86	111.11	106.79	74.00	32.79

Worse case mode:	802.11b	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	---------	---------------	--------	---------	------	------------

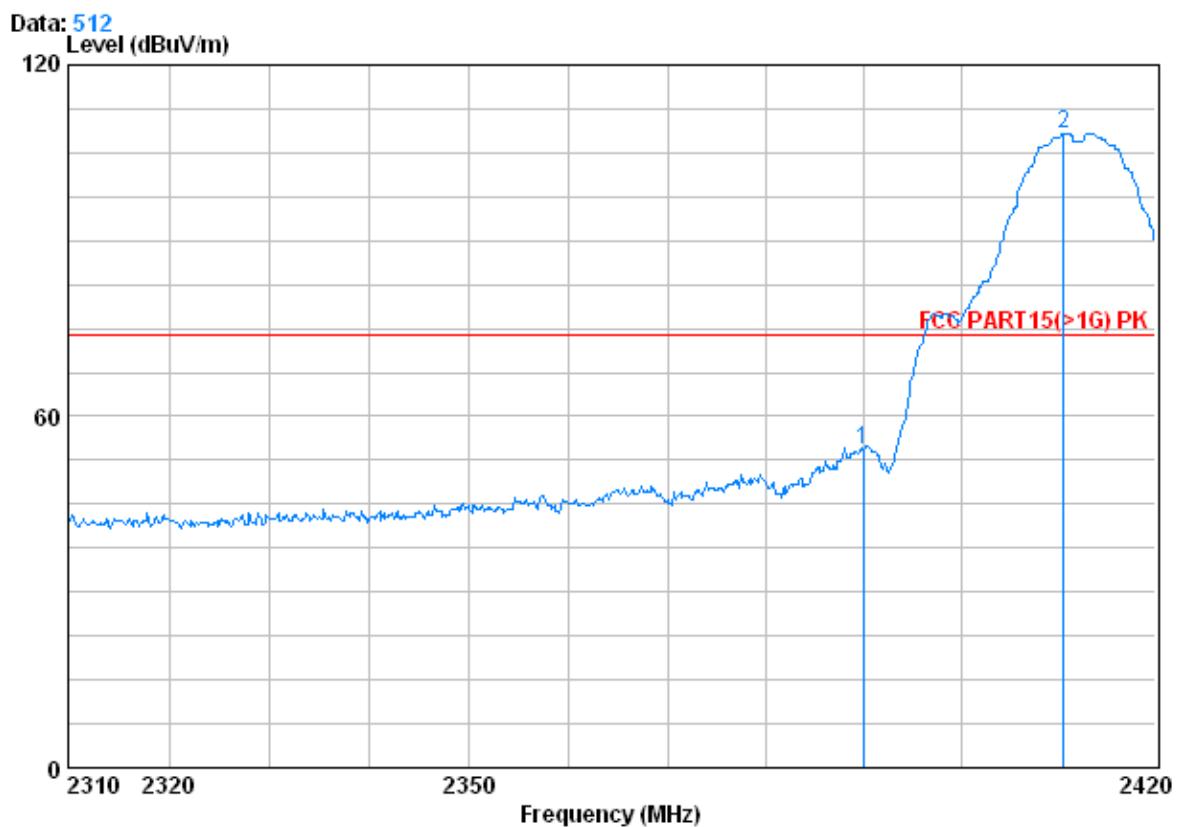


Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 0778RF

Test mode : B 2412 Bandedge

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	58.75	54.40	74.00	-19.60
2	2410.540	2.99	32.54	39.86	112.62	108.29	74.00	34.29

Worse case mode:	802.11b	Test channel:	Lowest	Remark:	Average	Vertical
------------------	---------	---------------	--------	---------	---------	----------

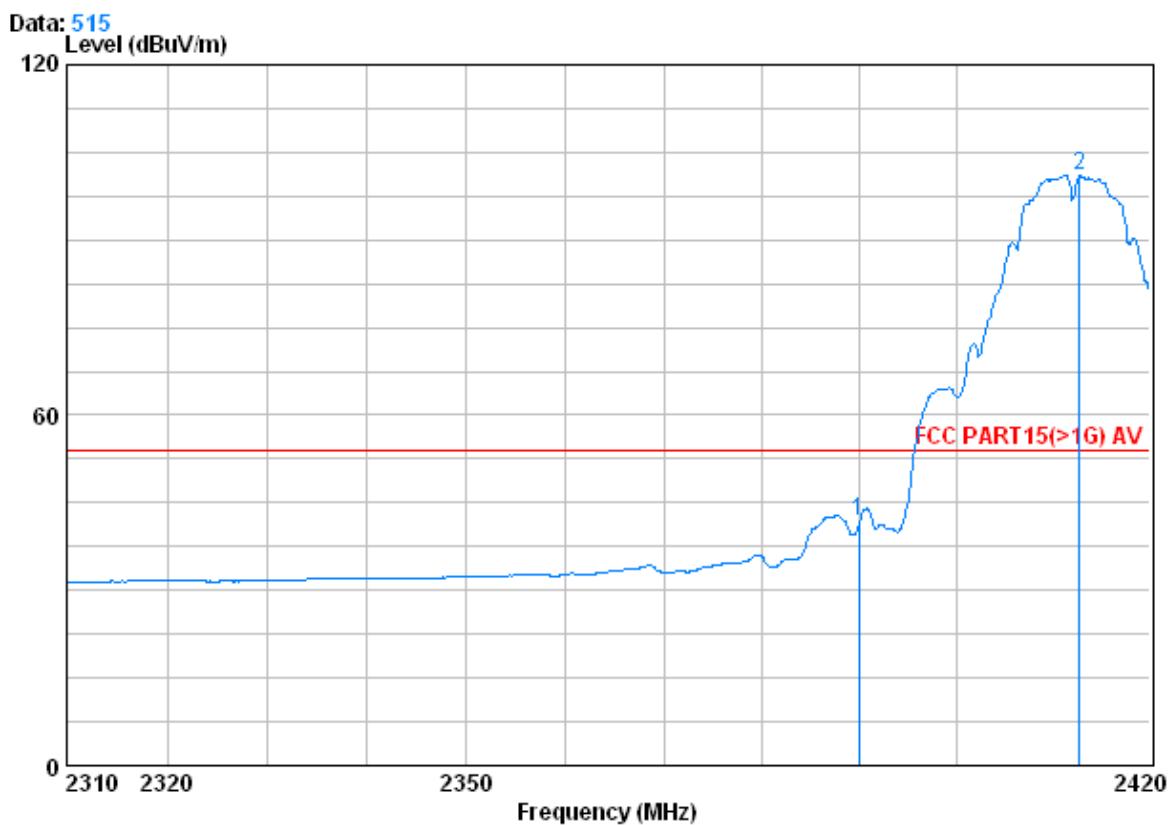


Condition : FCC PART15(&gt;1G) AV 3m VERTICAL

Job No. : 0778RF

Test mode : B 2412 Bandedge

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
	MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	46.18	41.83	54.00	-12.17
2	2412.740	2.99	32.54	39.86	105.27	100.94	54.00	46.94

Worse case mode:	802.11b	Test channel:	Lowest	Remark:	Average	Horizontal
------------------	---------	---------------	--------	---------	---------	------------

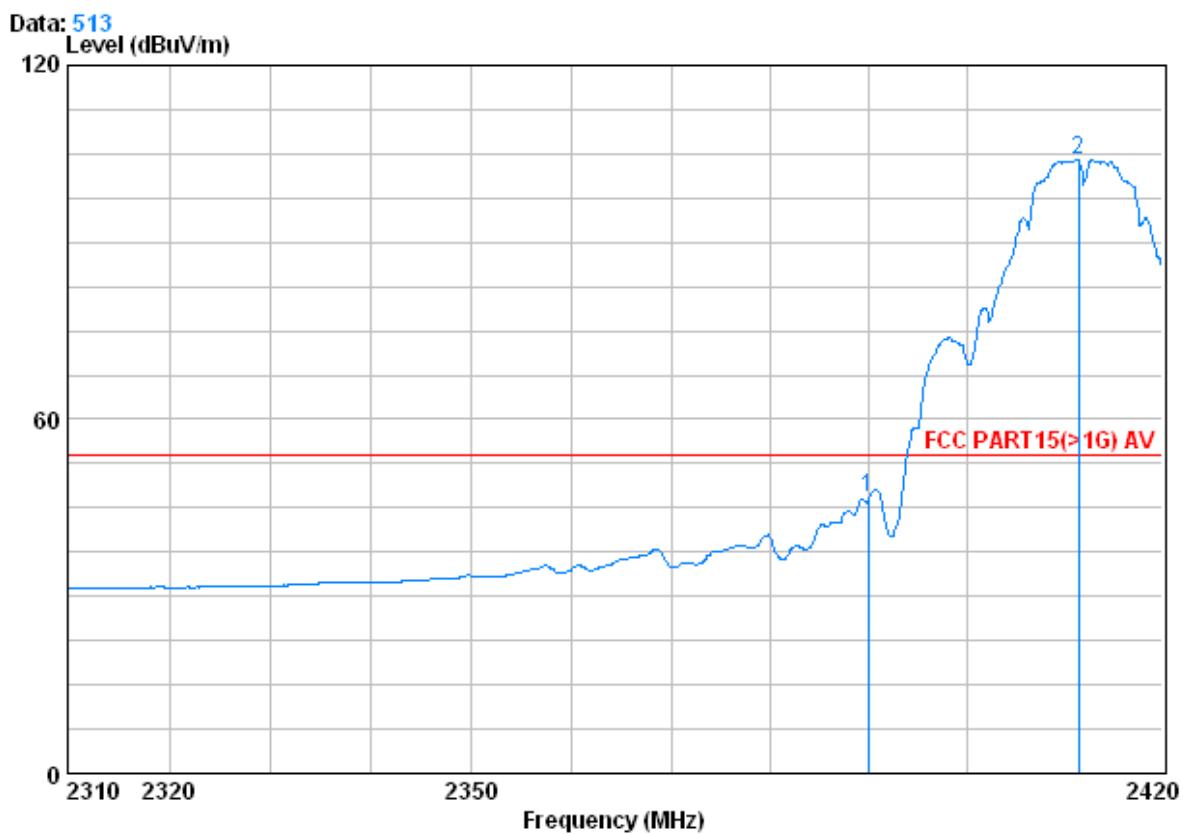


Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 0778RF

Test mode : B 2412 Bandedge

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Line Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	51.08	46.73	54.00	-7.27
2	2411.420	2.99	32.54	39.86	108.34	104.01	54.00	50.01

Worse case mode:	802.11b	Test channel:	Highest	Remark:	Peak	Vertical
------------------	---------	---------------	---------	---------	------	----------

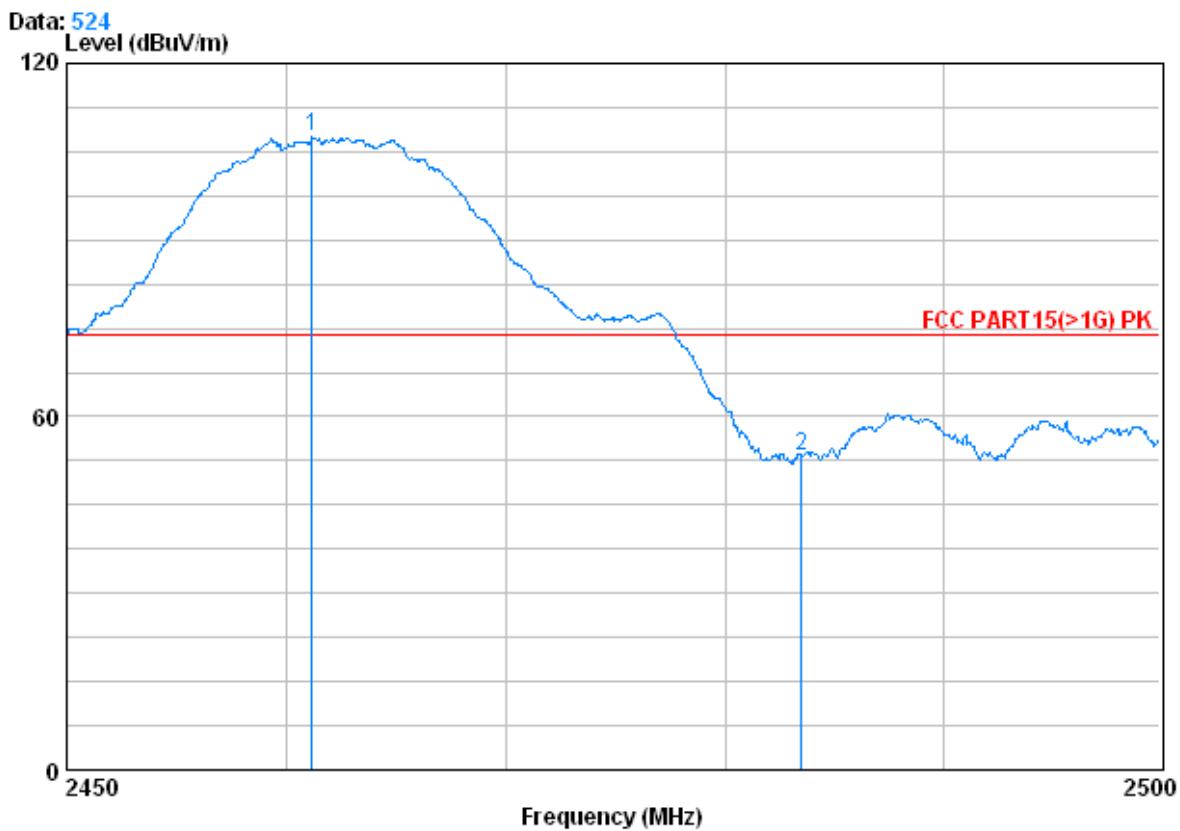


Condition : FCC PART15(&gt;1G) PK 3m VERTICAL

Job No. : 0778RF

Test mode : B 2462 Bandedge

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
	MHz	dB	dB/m		dB	dBuV	dBuV/m	dB
1 X	2461.150	3.02	32.64	39.91	111.70	107.46	74.00	33.46
2	2483.500	3.03	32.67	39.92	57.64	53.42	74.00	-20.58

Worse case mode:	802.11b	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	---------	---------------	---------	---------	------	------------

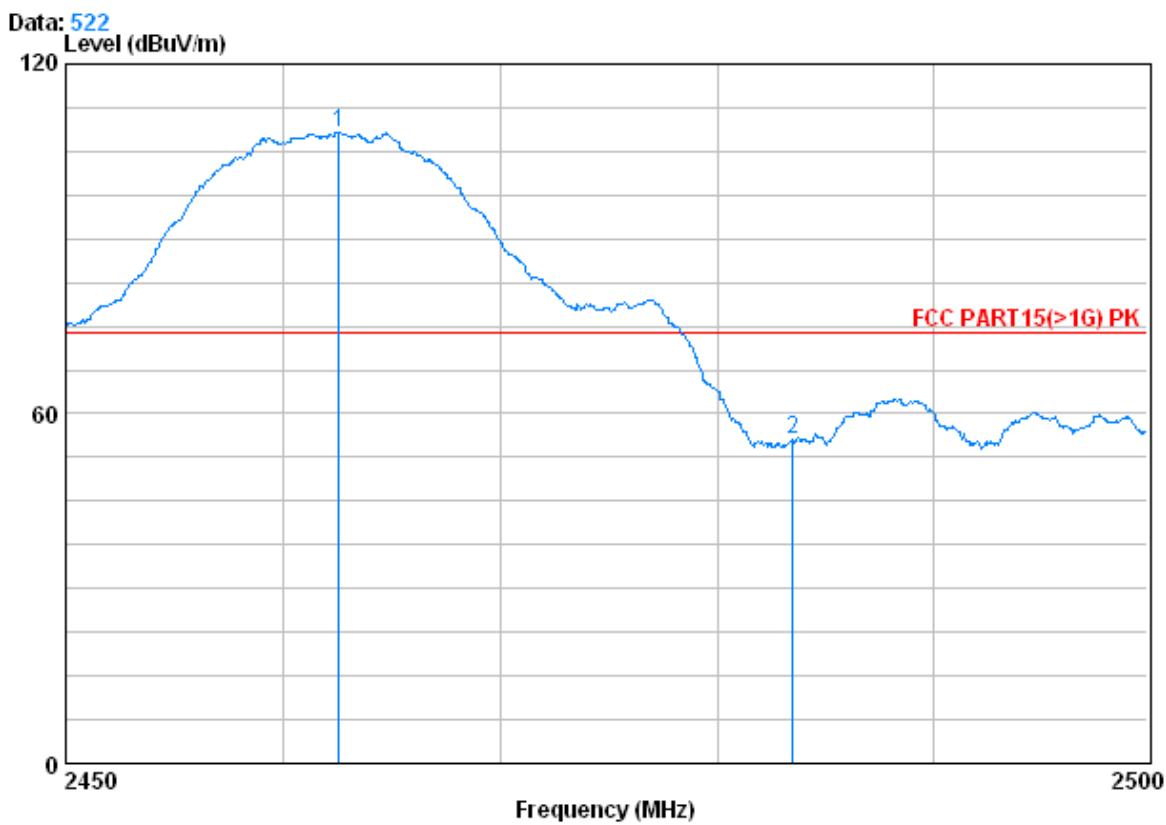


Condition : FCC PART15(&gt;1G) PK 3m HORIZONTAL

Job No. : 0778RF

Test mode : B 2462 Bandedge(15)

Freq	Cable		Antenna	Preamp	Read	Limit	Over	
	Loss	Factor	Factor	Level	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2462.550	3.02	32.64	39.91	112.46	108.21	74.00	34.21
2	2483.500	3.03	32.67	39.92	59.84	55.62	74.00	-18.38

Worse case mode:	802.11b	Test channel:	Highest	Remark:	Average	Vertical
------------------	---------	---------------	---------	---------	---------	----------

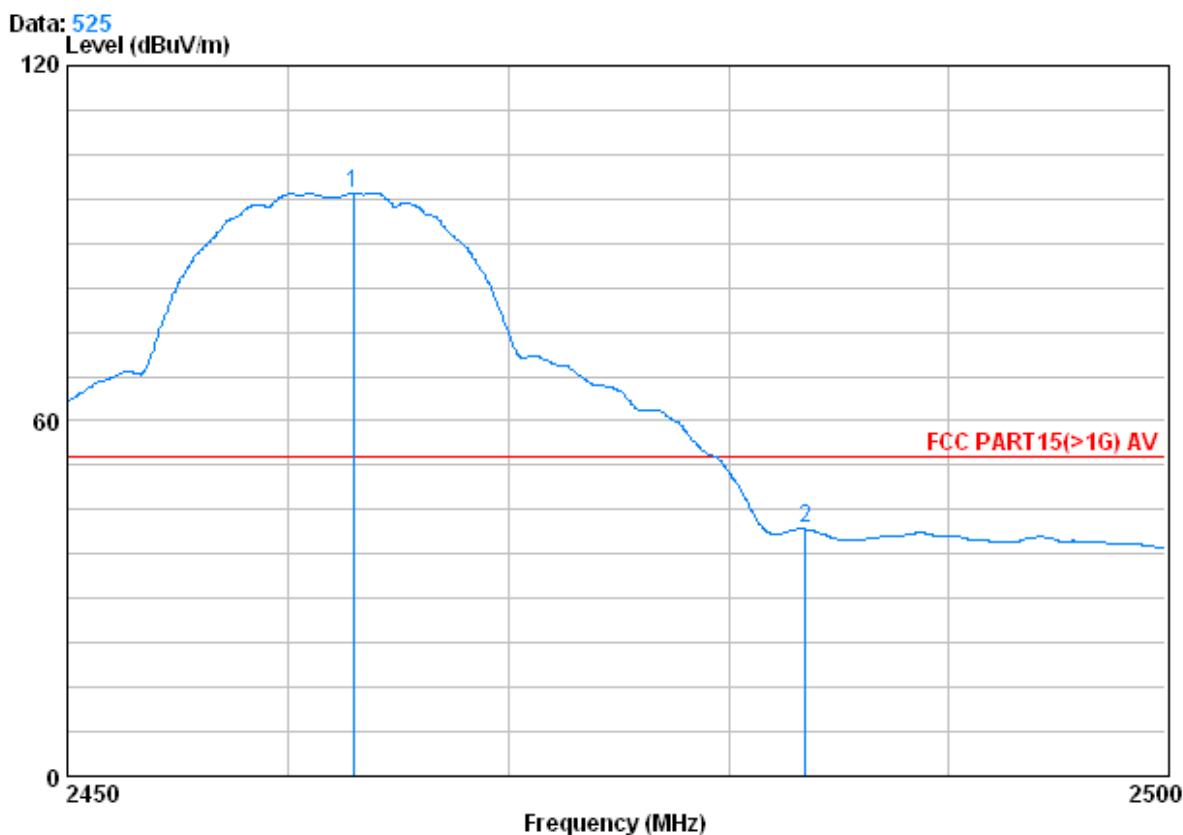


Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 0778RF

Test mode : B 2462 Bandedge

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 0	2462.950	3.02	32.64	39.91	102.80	98.55	54.00	44.55
2	2483.500	3.03	32.67	39.92	45.96	41.74	54.00	-12.26

Worse case mode:	802.11b	Test channel:	Highest	Remark:	Average	Horizontal
------------------	---------	---------------	---------	---------	---------	------------

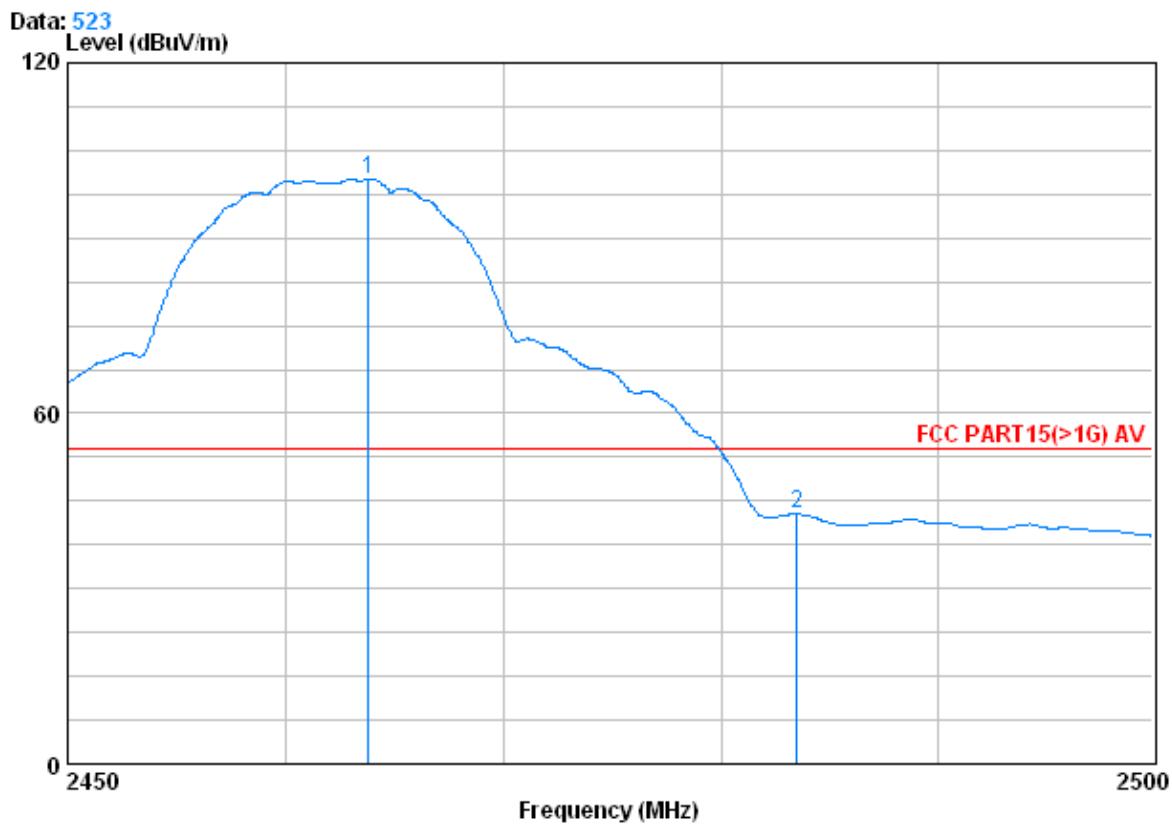


Condition : FCC PART15(&gt;1G) AV 3m HORIZONTAL

Job No. : 0778RF

Test mode : B 2462 Bandedge

	Freq	Cable	Antenna	Preamp	Read	Limit	Over	
		Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2463.750	3.02	32.64	39.91	104.38	100.13	54.00	46.13
2	2483.500	3.03	32.67	39.92	46.94	42.72	54.00	-11.28

Worse case mode:	802.11g	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	---------	---------------	--------	---------	------	----------

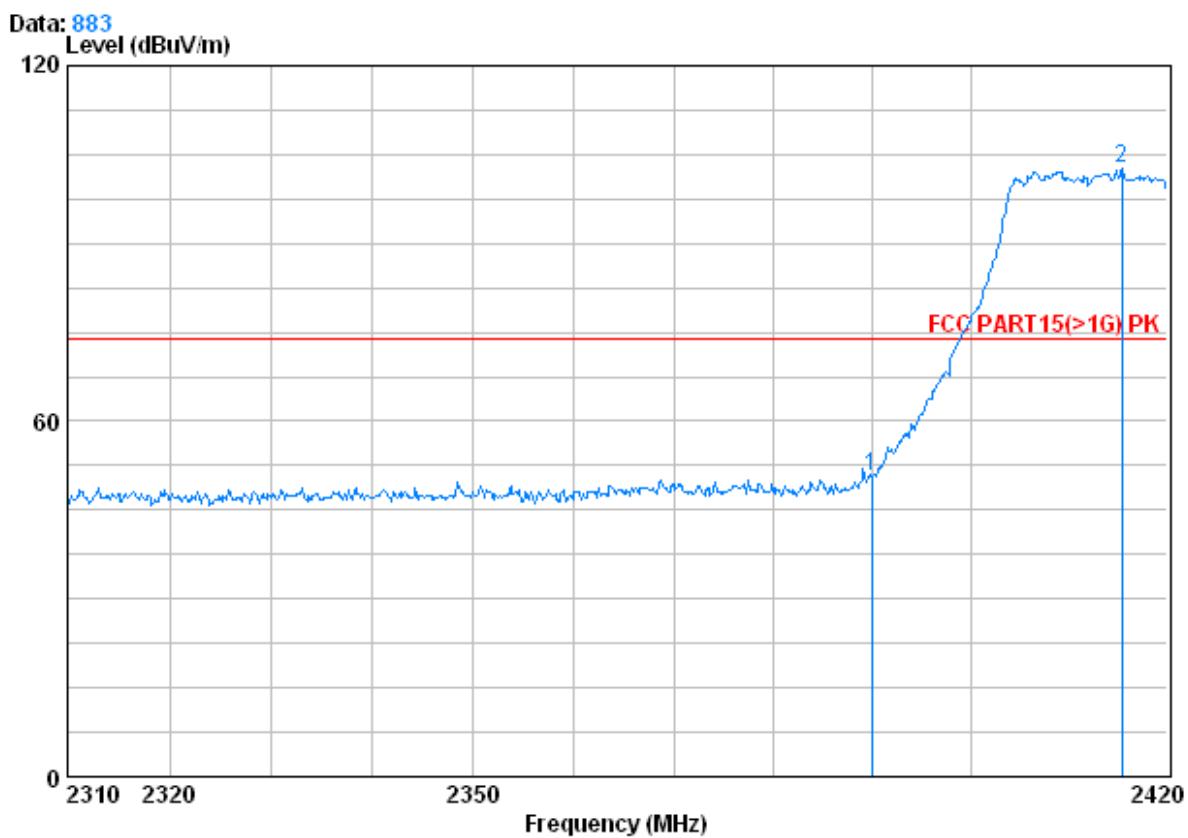

Condition : FCC PART15(&gt;1G) PK 3m VERTICAL

Job No. : 0778RF


Test mode : G 2412 Bandedge

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	54.93	50.57	74.00	-23.43
2 X	2415.380	2.99	32.54	39.86	106.87	102.54	74.00	28.54



"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Worse case mode:	802.11g	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	---------	---------------	--------	---------	------	------------

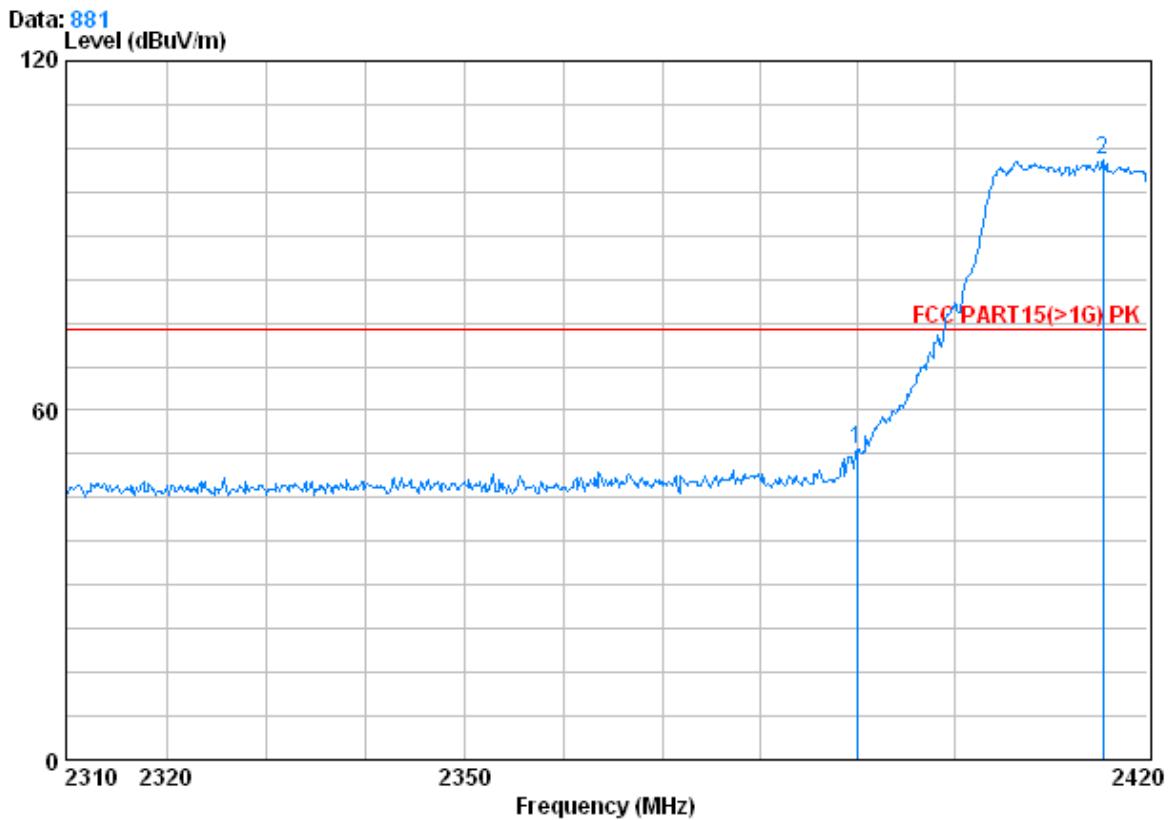


Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 0778RF

Test mode : G 2412 Bandedge

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
	MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	57.60	53.25	74.00	-20.75
2 X	2415.380	2.99	32.54	39.86	107.21	102.88	74.00	28.88

Worse case mode:	802.11g	Test channel:	Lowest	Remark:	Average	Vertical
------------------	---------	---------------	--------	---------	---------	----------

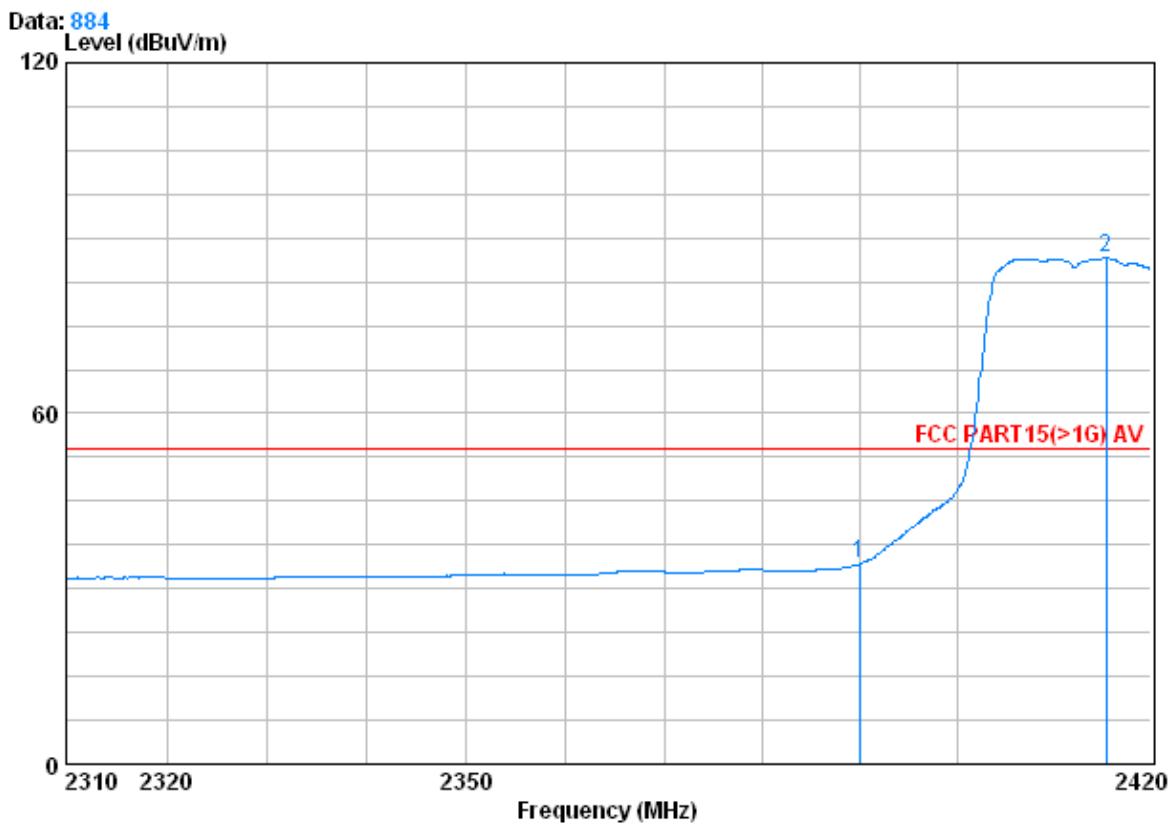


Condition : FCC PART15(&gt;1G) AV 3m VERTICAL

Job No. : 0778RF

Test mode : G 2412 Bandedge

		Cable	Antenna	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	38.55	34.19	54.00	-19.81
2	2415.380	2.99	32.54	39.86	90.87	86.54	54.00	32.54

Worse case mode:	802.11g	Test channel:	Lowest	Remark:	Average	Horizontal
------------------	---------	---------------	--------	---------	---------	------------

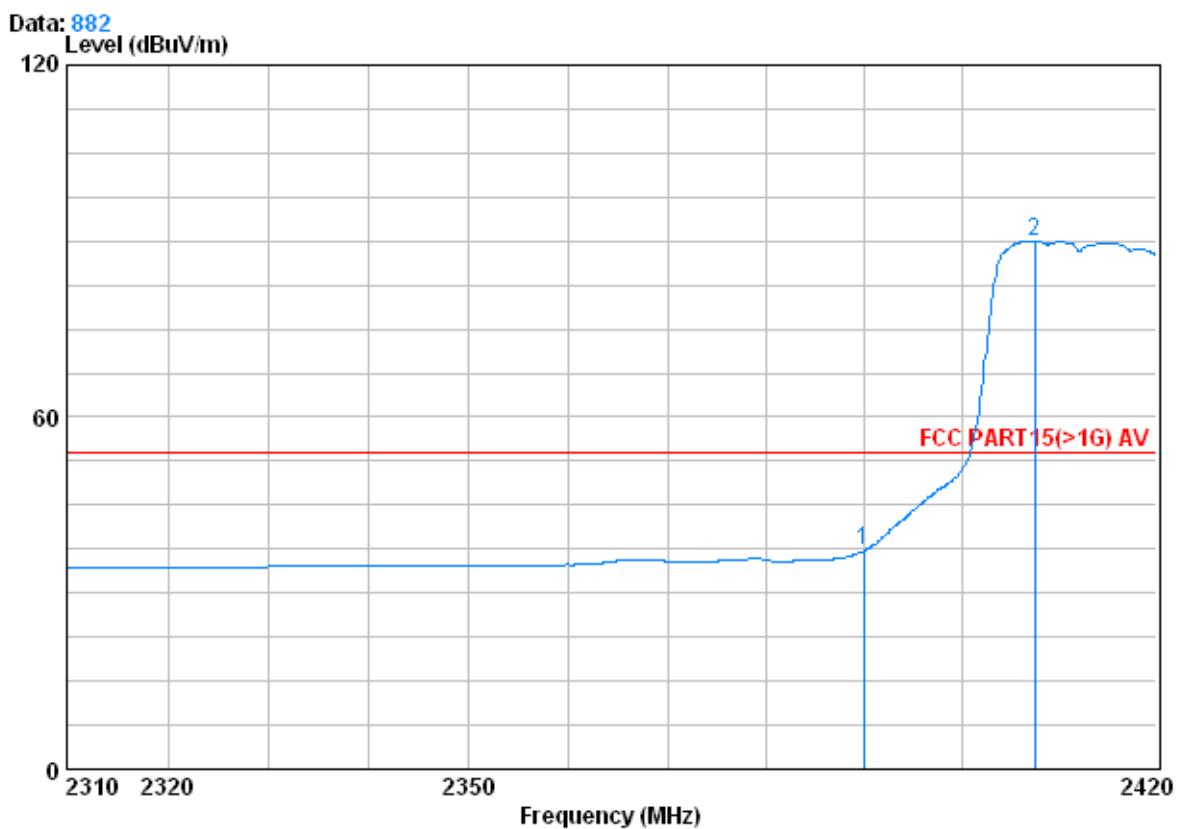


Condition : FCC PART15(&gt;1G) AV 3m HORIZONTAL

Job No. : 0778RF

Test mode : G 2412 Bandedge

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Line Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	41.60	37.25	54.00	-16.75
2	2407.460	2.99	32.54	39.86	94.28	89.96	54.00	35.96

Worse case mode:	802.11g	Test channel:	Highest	Remark:	Peak	Vertical
------------------	---------	---------------	---------	---------	------	----------

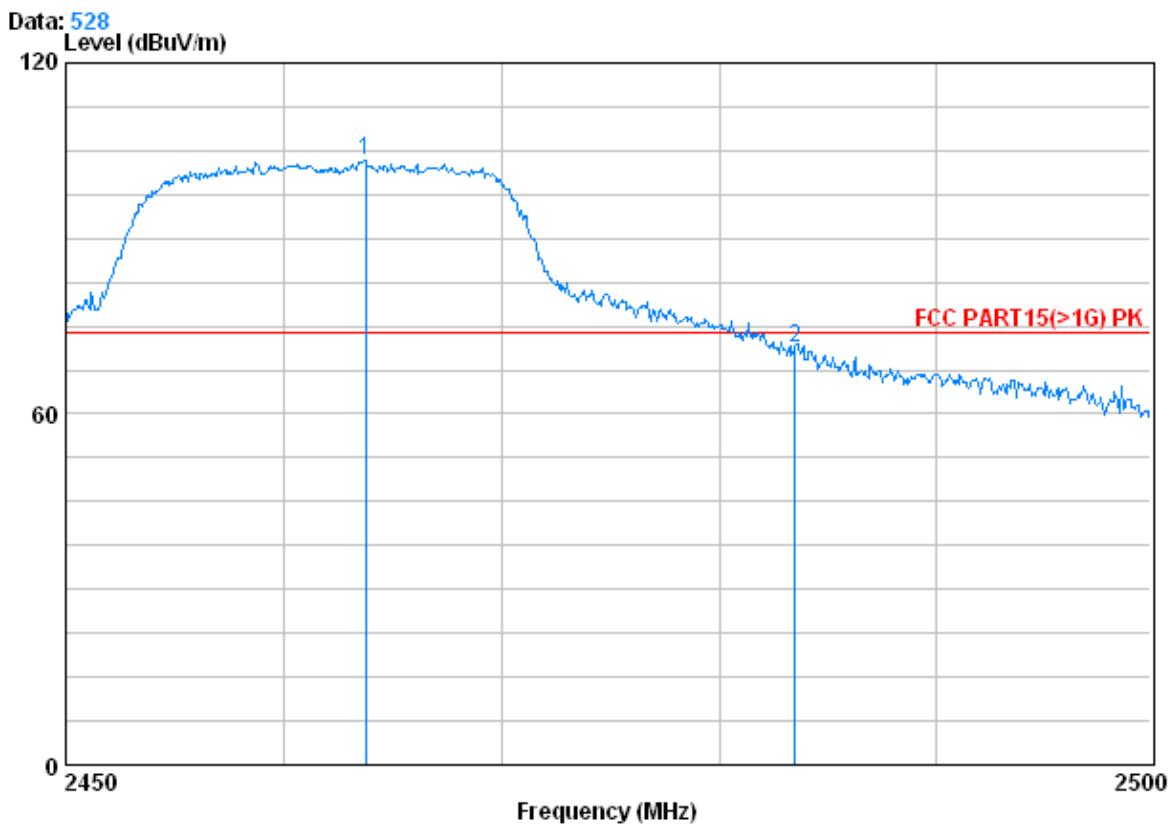


Condition : FCC PART15(&gt;1G) PK 3m VERTICAL

Job No. : 0778RF

Test mode : G 2462 Bandedge 15

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m		dB	dBuV	dBuV/m	dB
1 X	2463.700	3.02	32.64	39.91	107.58	103.33	74.00	29.33
2	2483.500	3.03	32.67	39.92	75.63	71.41	74.00	-2.59

Worse case mode:	802.11g	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	---------	---------------	---------	---------	------	------------

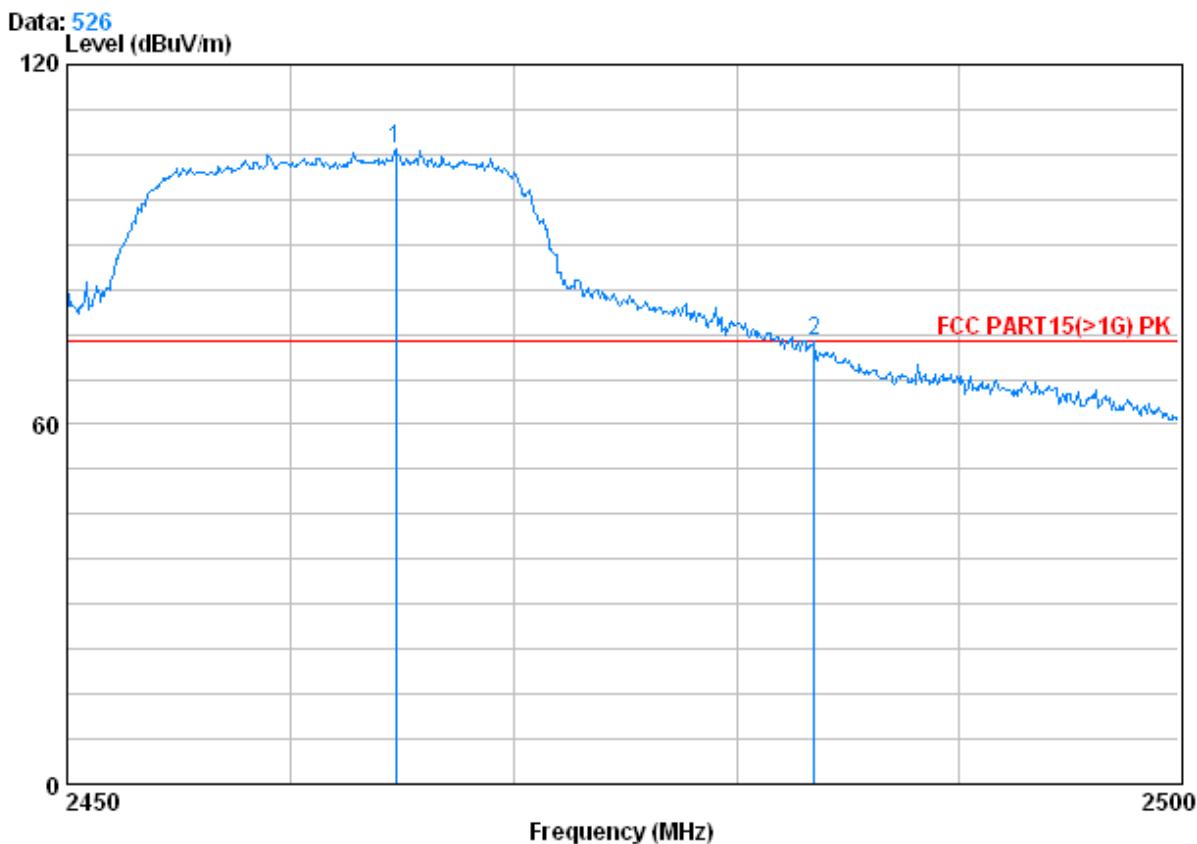


Condition : FCC PART15(&gt;1G) PK 3m HORIZONTAL

Job No. : 0778RF

Test mode : G 2462 Bandedge 15

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
	MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB
1 X	2464.700	3.02	32.64	39.91	110.17	105.92	74.00	31.92
2	2483.500	3.03	32.67	39.92	78.01	73.79	74.00	-0.21

Worse case mode:	802.11g	Test channel:	Highest	Remark:	Average	Vertical
------------------	---------	---------------	---------	---------	---------	----------

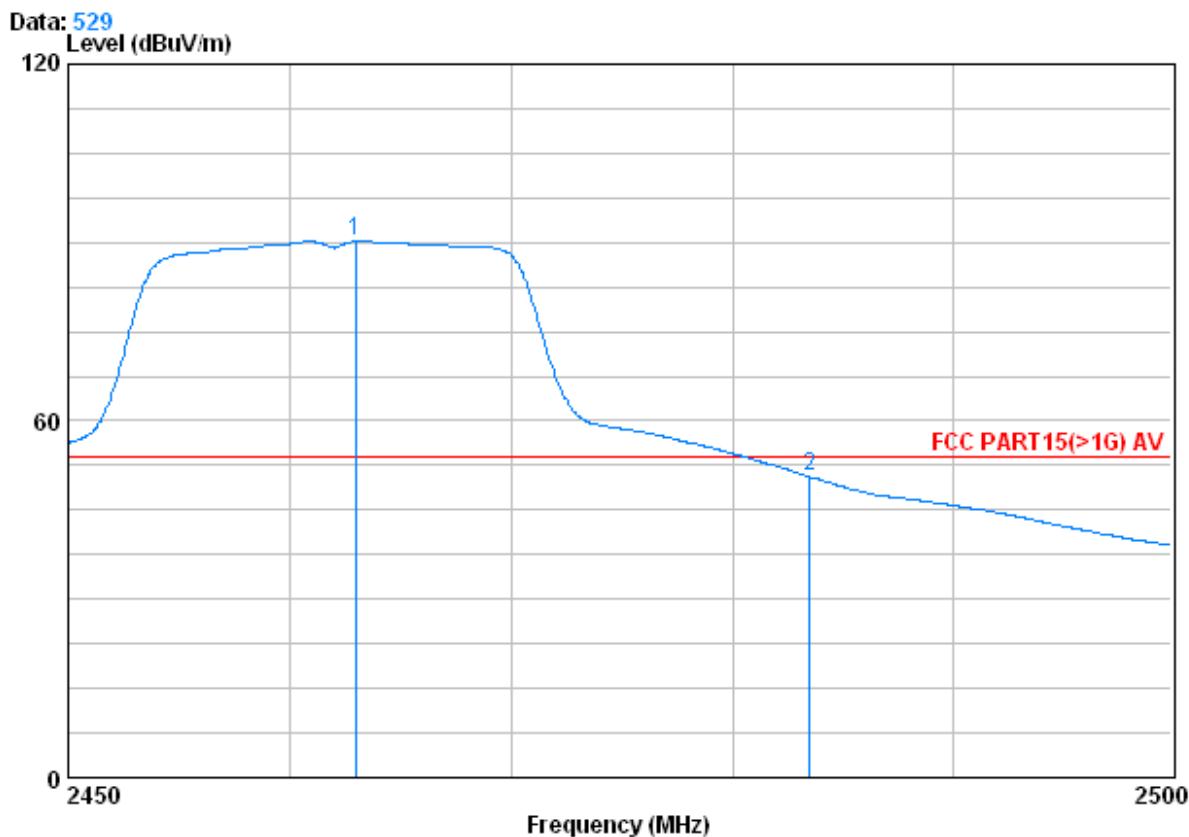


Condition : FCC PART15(&gt;1G) AV 3m VERTICAL

Job No. : 0778RF

Test mode : G 2462 Bandedge 15

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 0	2462.950	3.02	32.64	39.91	94.49	90.24	54.00	36.24
2	2483.500	3.03	32.67	39.92	54.84	50.62	54.00	-3.38

Worse case mode:	802.11g	Test channel:	Highest	Remark:	Average	Horizontal
------------------	---------	---------------	---------	---------	---------	------------

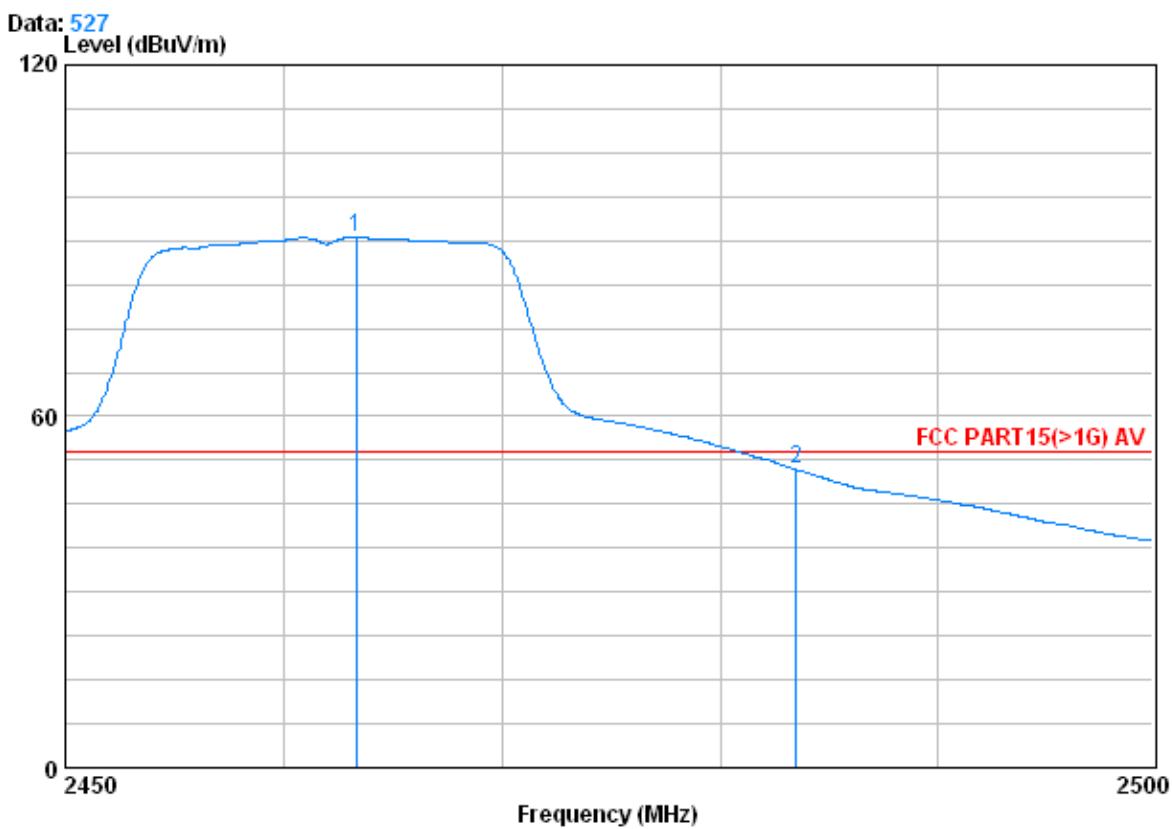


Condition : FCC PART15(&gt;1G) AV 3m HORIZONTAL

Job No. : 0778RF

Test mode : G 2462 Bandedge 15

		Cable	Antenna	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	0	2463.300	3.02	32.64	39.91	94.87	90.62	54.00	36.62
2		2483.500	3.03	32.67	39.92	55.17	50.95	54.00	-3.05

Worse case mode:	802.11n(HT20)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	---------------	---------------	--------	---------	------	----------

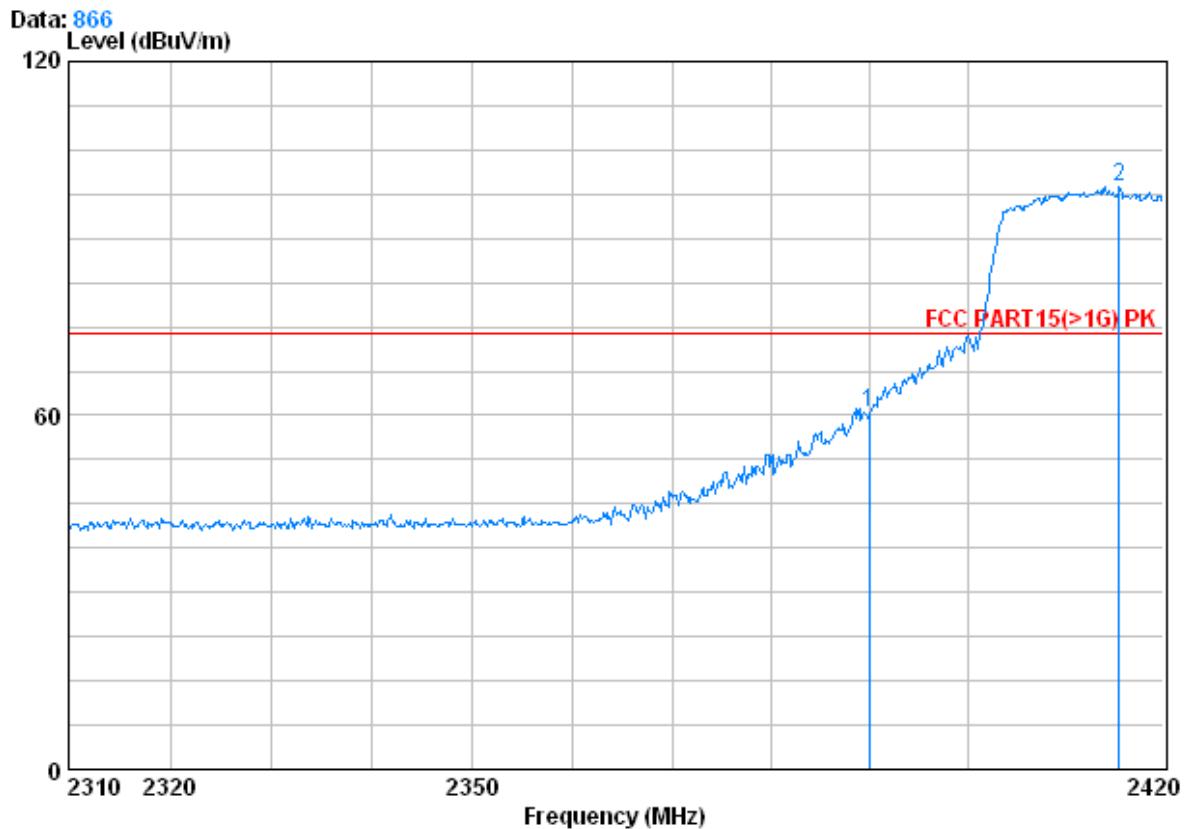


Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 0778RF

Test mode : N(HT20) 2412 Bandedge

	Freq	Cable	Antenna	Preamp	Read	Limit	Over	
		Loss	Factor	Factor	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	64.82	60.47	74.00	-13.53
2 X	2415.490	2.99	32.54	39.86	103.17	98.84	74.00	24.84

Worse case mode:	802.11n(HT20)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	---------------	---------------	--------	---------	------	------------

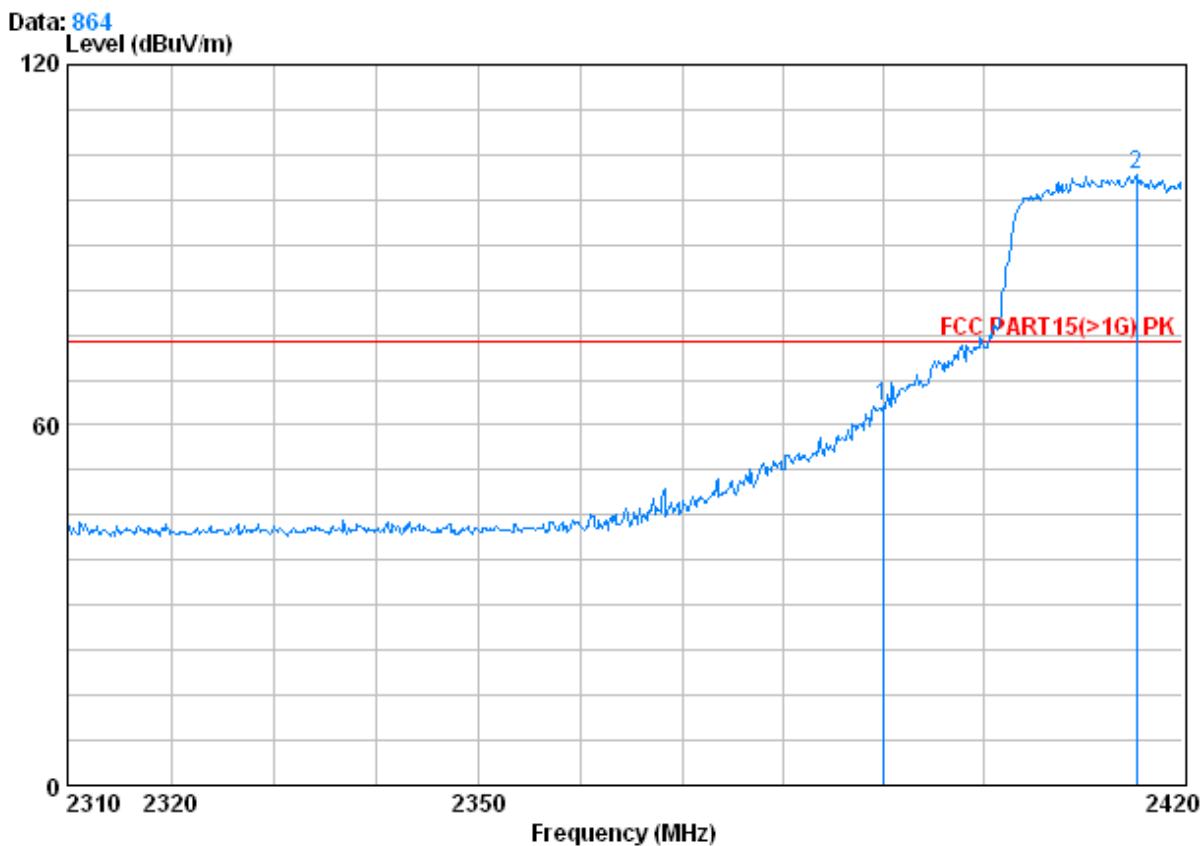


Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 0778RF

Test mode : N(HT20) 2412 Bandedge

	Freq	Cable	Antenna	Preamp	Read	Limit	Over	
		Loss	Factor	Factor	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	67.33	62.98	74.00	-11.02
2	2415.380	2.99	32.54	39.86	106.15	101.82	74.00	27.82

Worse case mode:	802.11n(HT20)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	---------------	---------------	--------	---------	---------	----------

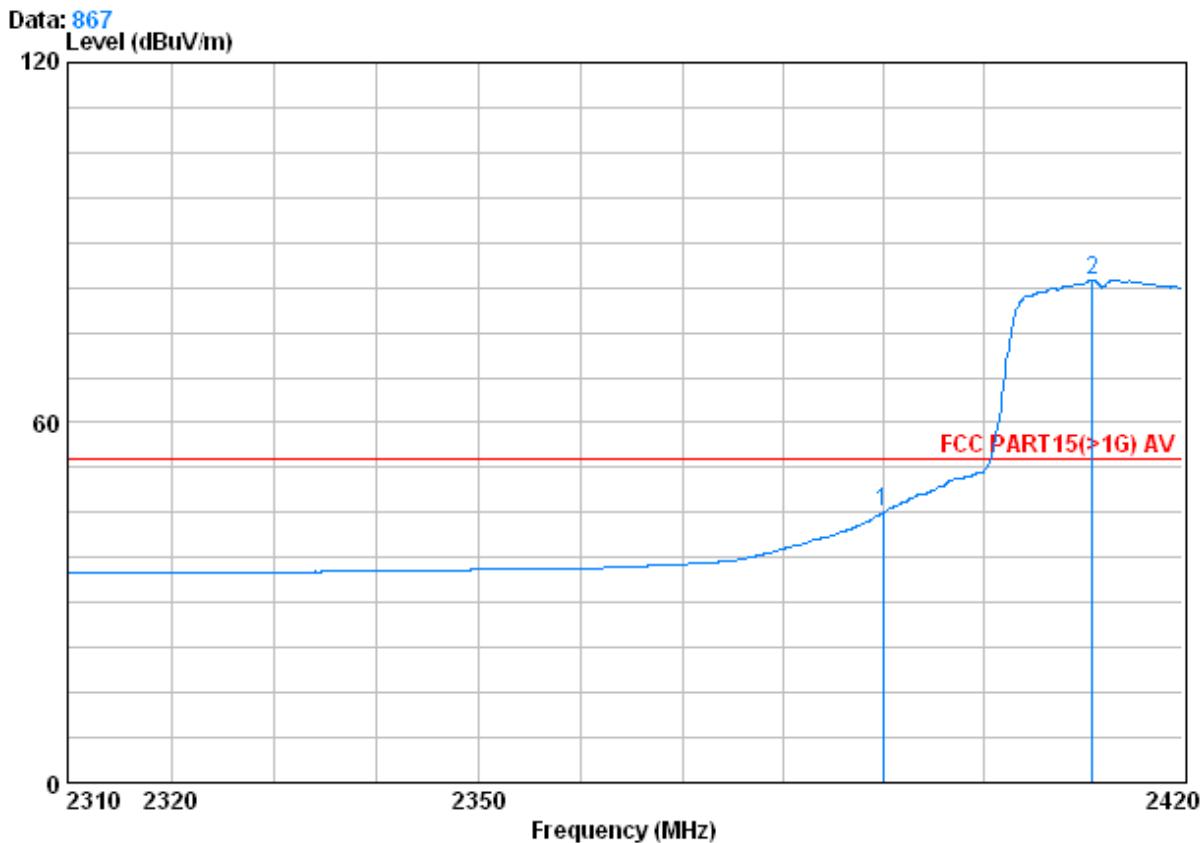

Condition : FCC PART15(&gt;1G) AV 3m VERTICAL

Job No. : 0778RF

Test mode : N(HT20) 2412 Bandedge

	Freq	Cable		Antenna	Preamp	Read	Limit	Over
		Loss	Factor	Factor	Level	Level		
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	49.44	45.08	54.00	-8.92
2	2410.980	2.99	32.54	39.86	88.13	83.80	54.00	29.80



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Worse case mode:	802.11n(HT20)	Test channel:	Lowest	Remark:	Average	Horizontal
------------------	---------------	---------------	--------	---------	---------	------------




Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 0778RF

Test mode : N(HT20) 2412 Bandedge

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Line Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	49.05	44.70	54.00	-9.30
2 0	2413.290	2.99	32.54	39.86	88.84	84.51	54.00	30.51

Worse case mode:	802.11n(HT20)	Test channel:	Highest	Remark:	Peak	Vertical
------------------	---------------	---------------	---------	---------	------	----------

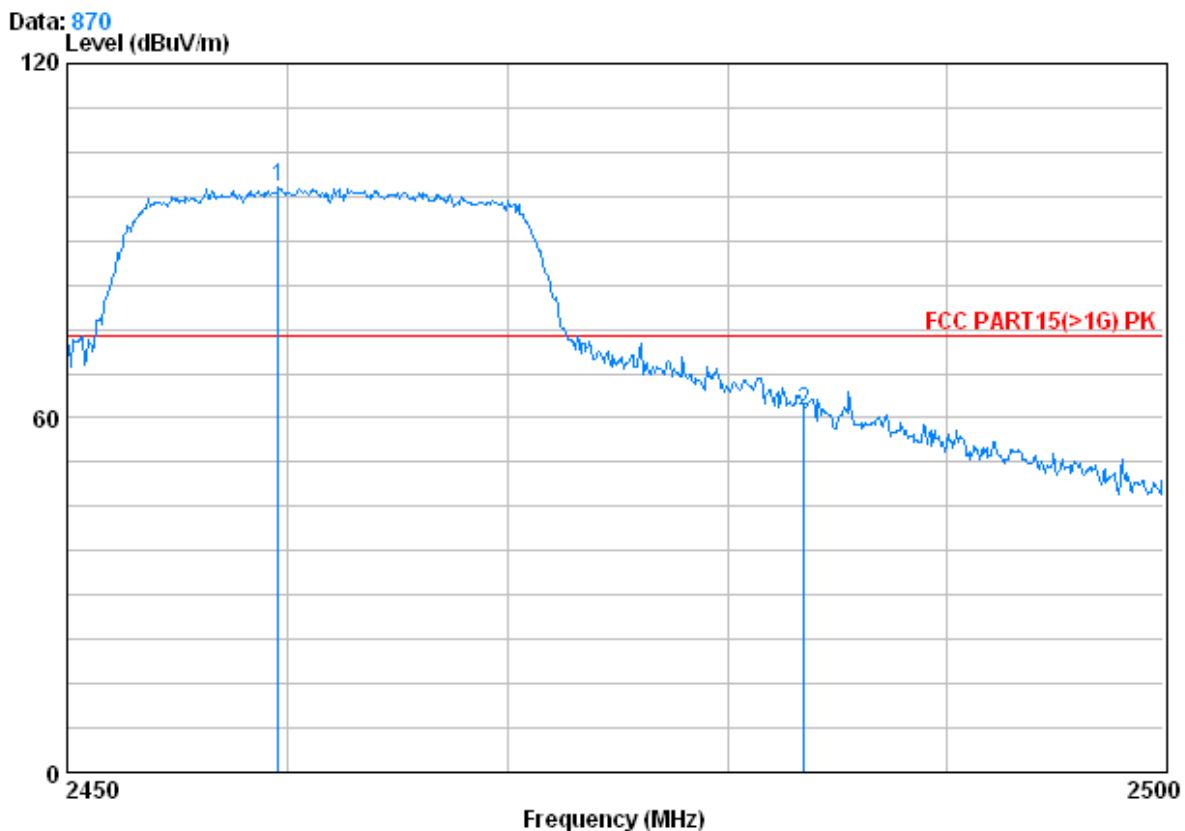


Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 0778RF

Test mode : N(HT20) 2462 Bandedge

	Freq	Cable	Antenna	Preamp	Read	Limit	Over	
		Loss	Factor	Factor	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2459.550	3.02	32.64	39.91	103.16	98.92	74.00	24.92
2	2483.500	3.03	32.67	39.92	65.52	61.30	74.00	-12.70

Worse case mode:	802.11n(HT20)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	---------------	---------------	---------	---------	------	------------

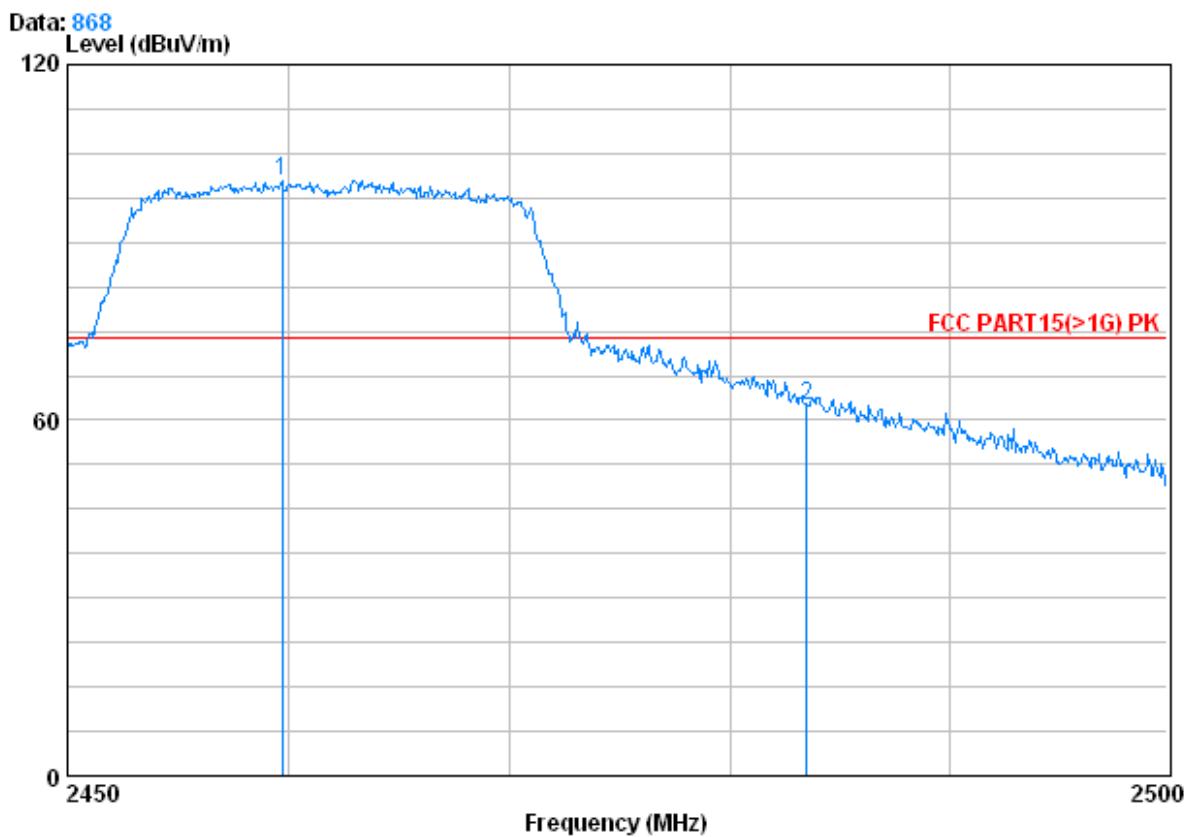


Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 0778RF

Test mode : N(HT20) 2462 Bandedge

		Cable Freq	Antenna Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2459.700	3.02	32.64	39.91	104.68	100.43	74.00	26.43
2		2483.500	3.03	32.67	39.92	66.77	62.55	74.00	-11.45

Worse case mode:	802.11n(HT20)	Test channel:	Highest	Remark:	Average	Vertical
------------------	---------------	---------------	---------	---------	---------	----------

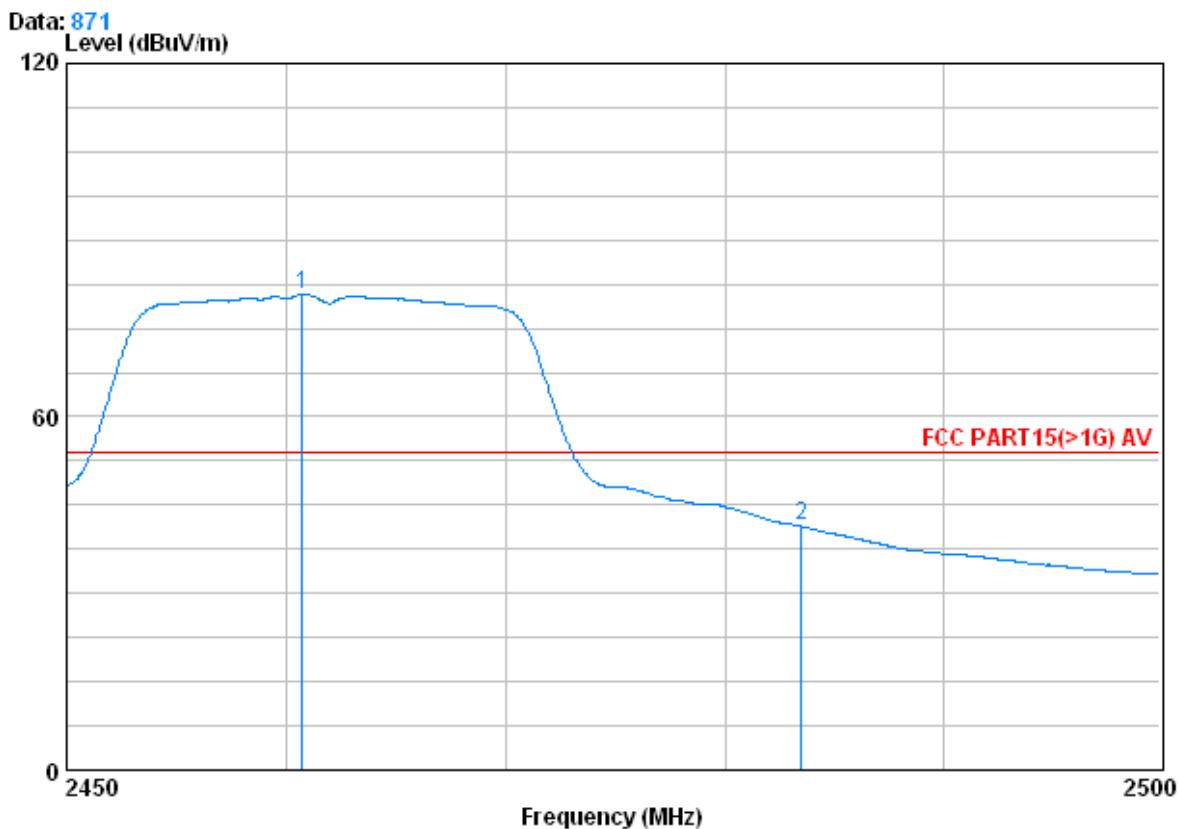


Condition : FCC PART15(&gt;1G) AV 3m VERTICAL

Job No. : 0778RF

Test mode : N(HT20) 2462 Bandedge

		Cable	Antenna	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	X	2460.700	3.02	32.64	39.91	85.00	80.75	54.00	26.75
2		2483.500	3.03	32.67	39.92	45.62	41.40	54.00	-12.60

Worse case mode:	802.11n(HT20)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	---------------	---------------	---------	---------	---------	------------

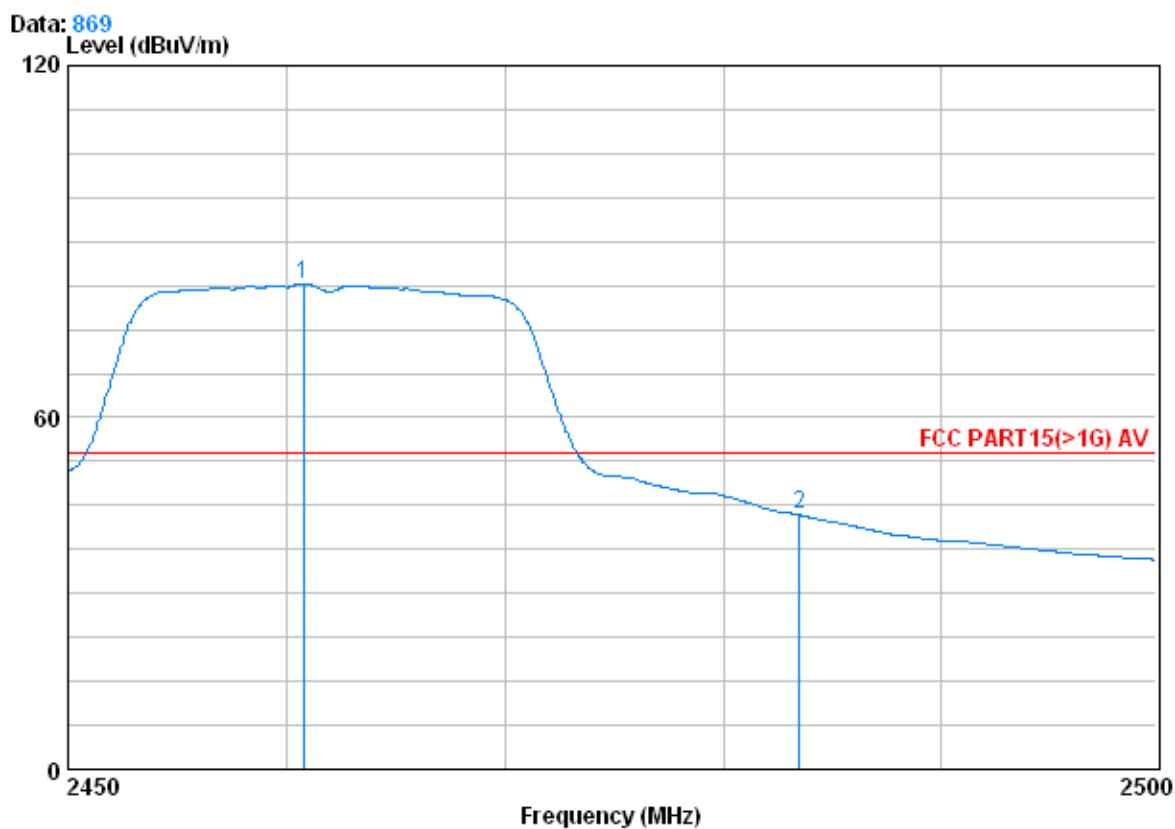


Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 0778RF

Test mode : N(HT20) 2462 Bandedge

	Freq	Cable	Antenna	Preamp	Read	Limit	Over	
		Loss	Factor	Factor	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 0	2460.750	3.02	32.64	39.91	87.13	82.89	54.00	28.89
2	2483.500	3.03	32.67	39.92	47.65	43.43	54.00	-10.57

Worse case mode:	802.11n(HT40)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	---------------	---------------	--------	---------	------	----------

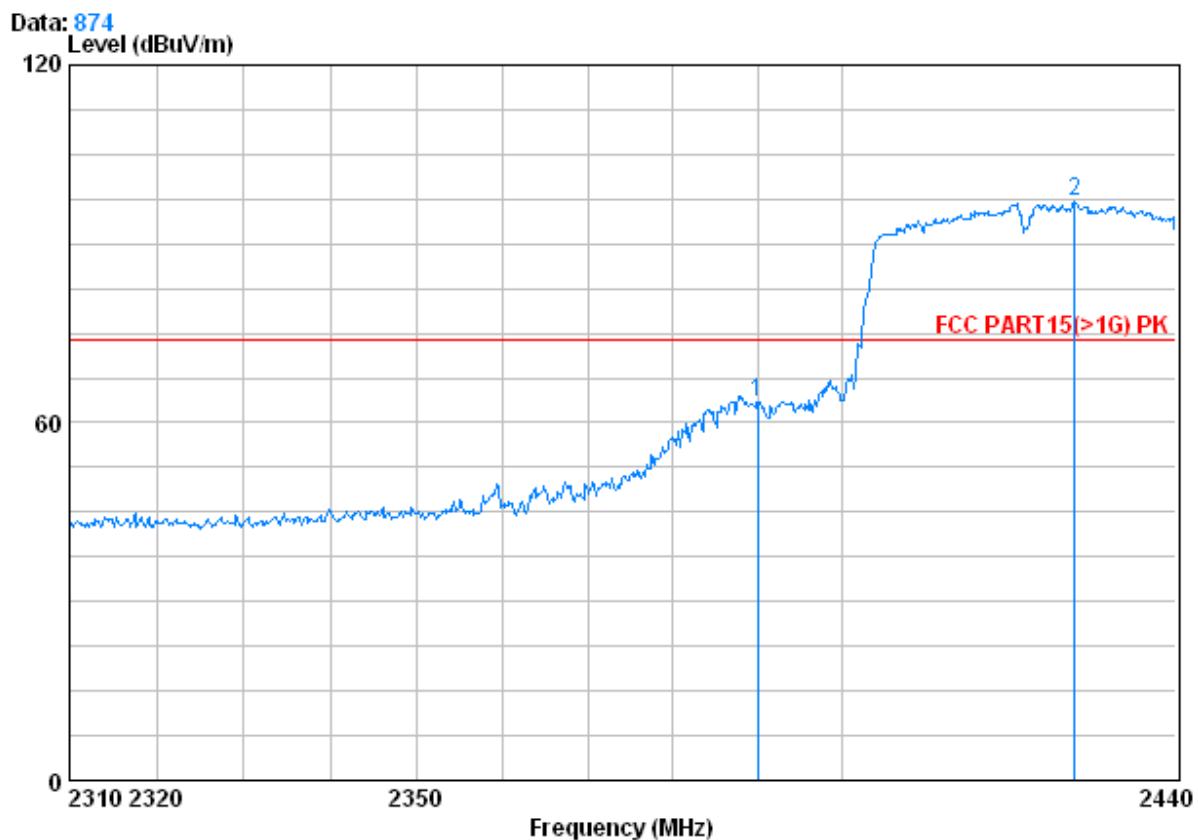


Condition : FCC PART15(&gt;1G) PK 3m VERTICAL

Job No. : 0778RF

Test mode : N(HT40) 2422 Bandedge

		Cable	Antenna	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.080	2.98	32.51	39.85	67.68	63.33	74.00	-10.67
2 X	2427.780	3.00	32.58	39.88	101.44	97.14	74.00	23.14

Worse case mode:	802.11n(HT40)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	---------------	---------------	--------	---------	------	------------

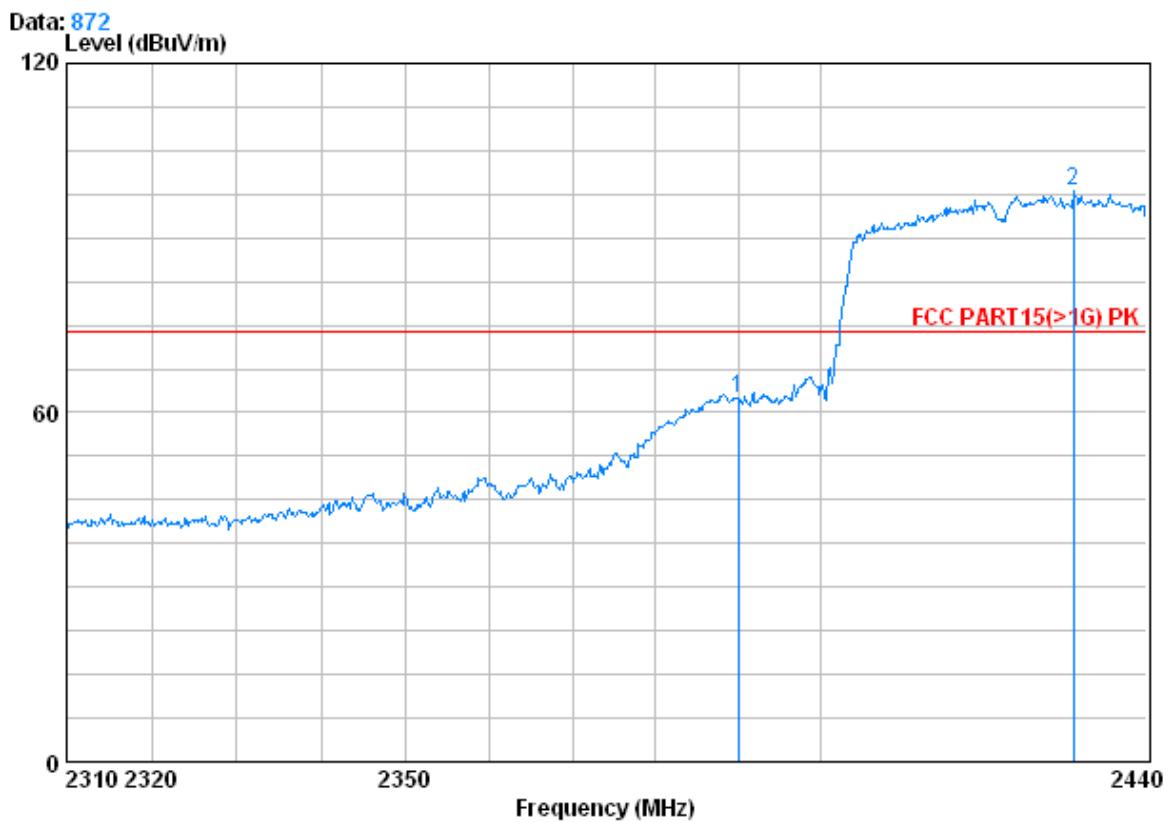


Condition : FCC PART15(&gt;1G) PK 3m HORIZONTAL

Job No. : 0778RF

Test mode : N(HT40) 2422 Bandedge

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
	MHz	dB	dB/m		dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	66.69	62.33	74.00	-11.67
2 X	2431.030	3.00	32.58	39.88	102.35	98.05	74.00	24.05

Worse case mode:	802.11n(HT40)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	---------------	---------------	--------	---------	---------	----------

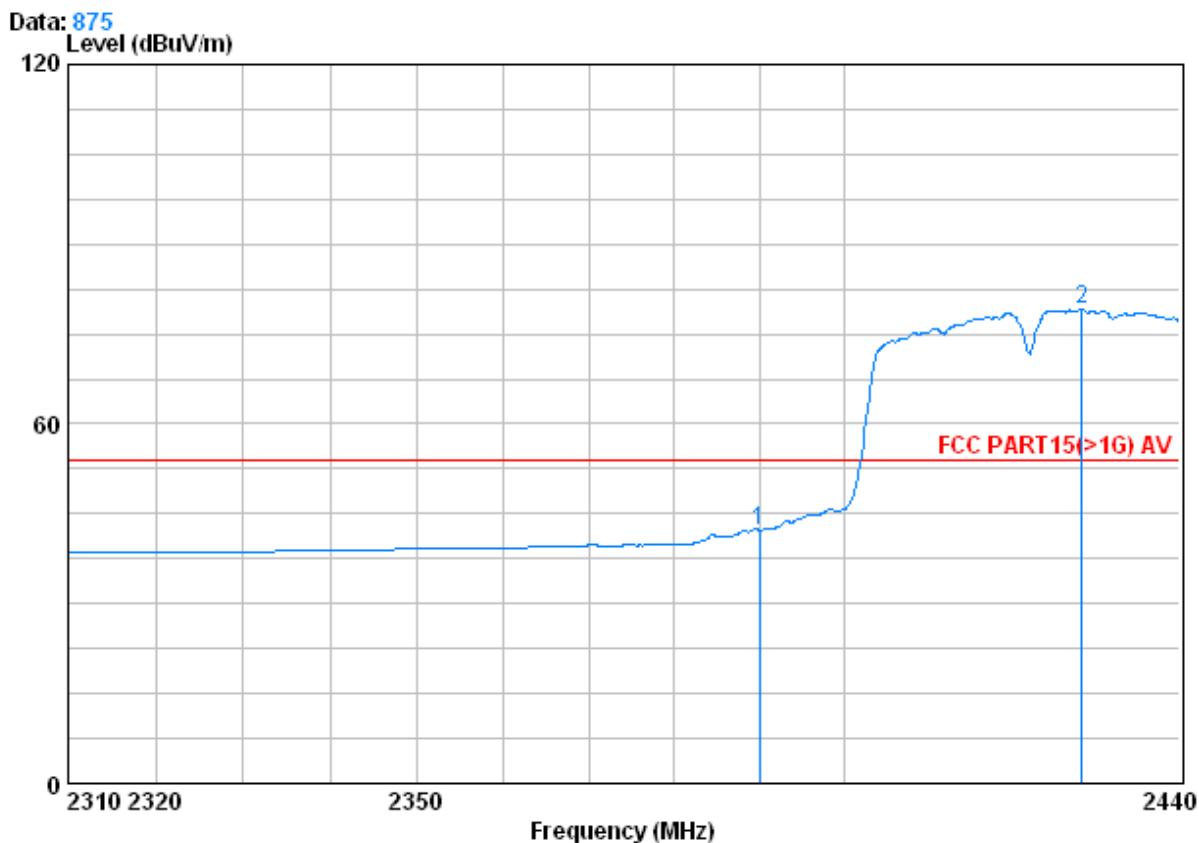


Condition : FCC PART15(&gt;1G) AV 3m VERTICAL

Job No. : 0778RF

Test mode : N(HT40) 2422 Bandedge

		Cable	Antenna	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	46.68	42.33	54.00	-11.67
2 X	2428.300	3.00	32.58	39.88	83.51	79.21	54.00	25.21

Worse case mode:	802.11n(HT40)	Test channel:	Lowest	Remark:	Average	Horizontal
------------------	---------------	---------------	--------	---------	---------	------------

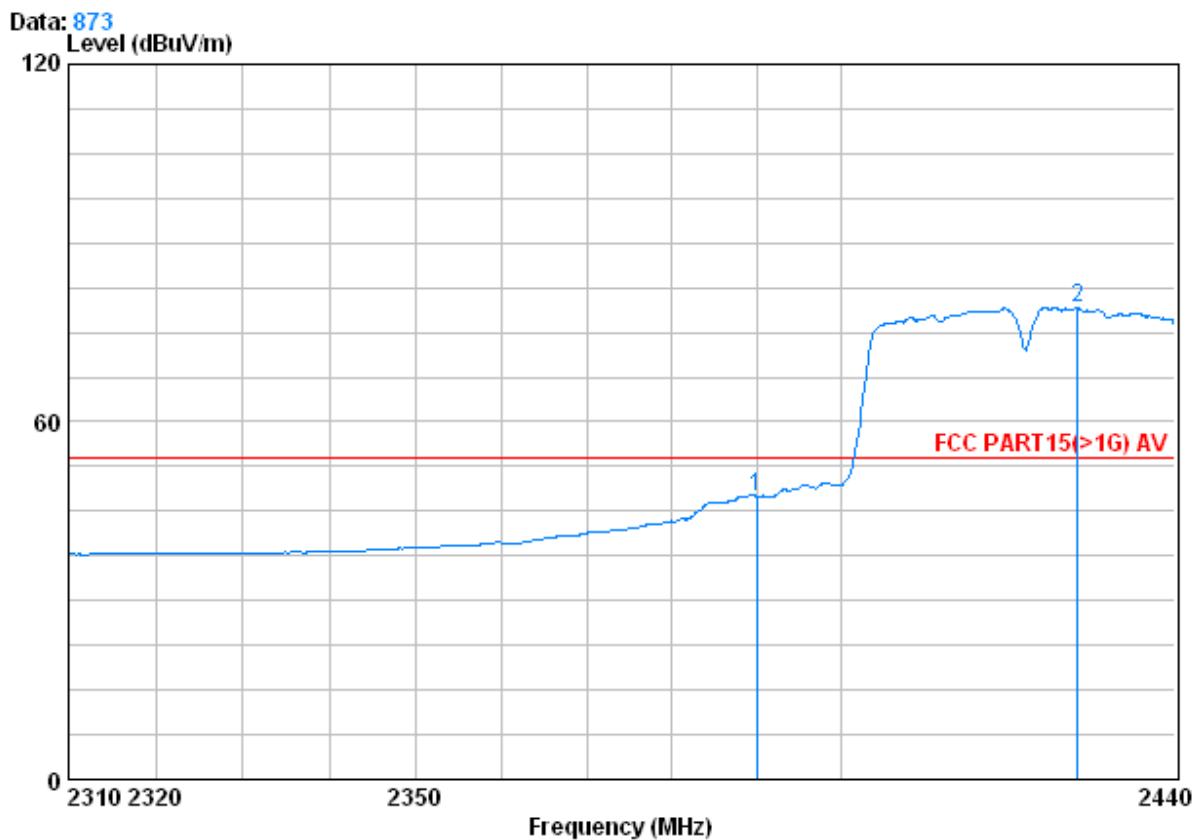


Condition : FCC PART15(&gt;1G) AV 3m HORIZONTAL

Job No. : 0778RF

Test mode : N(HT40) 2422 Bandedge

	Freq	Cable Loss	Antenna Factor	Preamp Factor	Read Level	Limit Level	Line Limit	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	51.86	47.51	54.00	-6.49
2 X	2428.300	3.00	32.58	39.88	83.39	79.09	54.00	25.09

Worse case mode:	802.11n(HT40)	Test channel:	Highest	Remark:	Peak	Vertical
------------------	---------------	---------------	---------	---------	------	----------

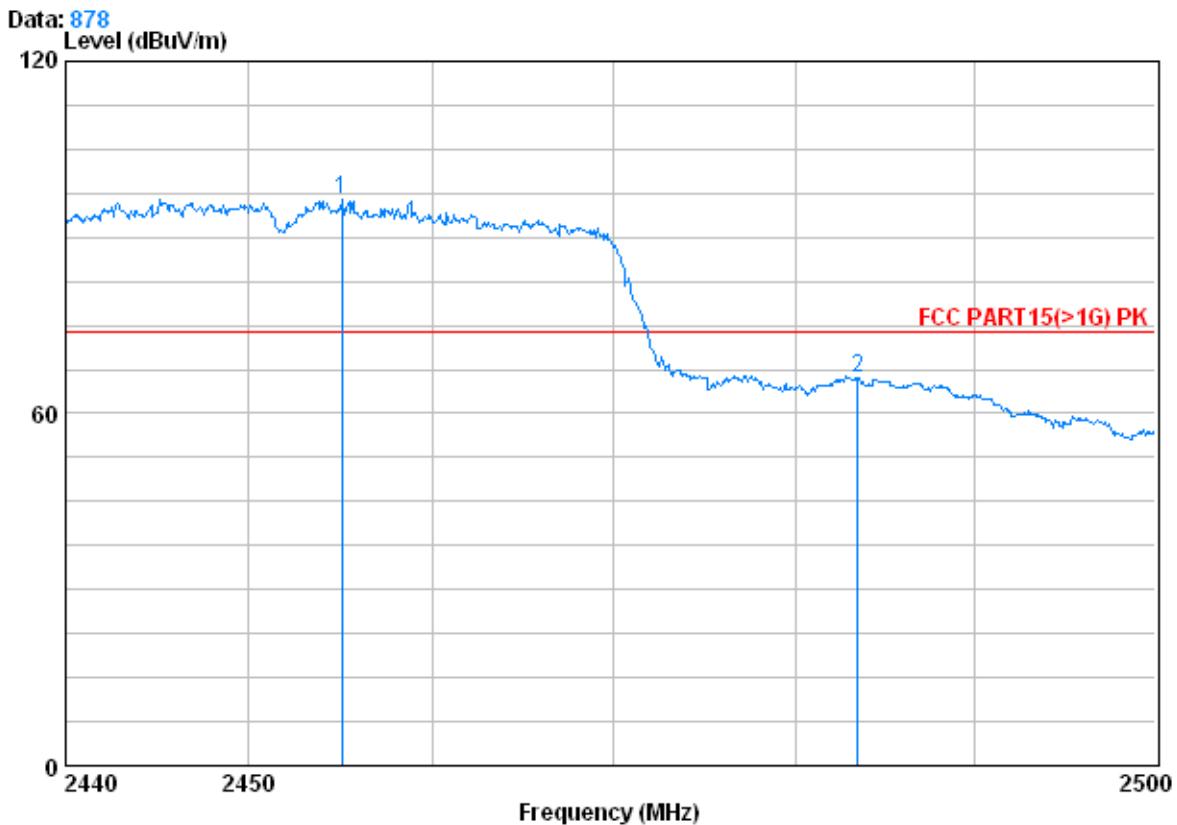

Condition : FCC PART15(&gt;1G) PK 3m VERTICAL

Job No. : 0778RF


Test mode : N(HT40) 2452 Bandedge

	Cable	Antenna	Preamp	Read	Limit	Over	
	Freq	Loss Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m
1 X	2455.060	3.01	32.64	39.91	100.72	96.46	74.00 22.46
2	2483.500	3.03	32.67	39.92	70.12	65.90	74.00 -8.10



"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Worse case mode:	802.11n(HT40)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	---------------	---------------	---------	---------	------	------------

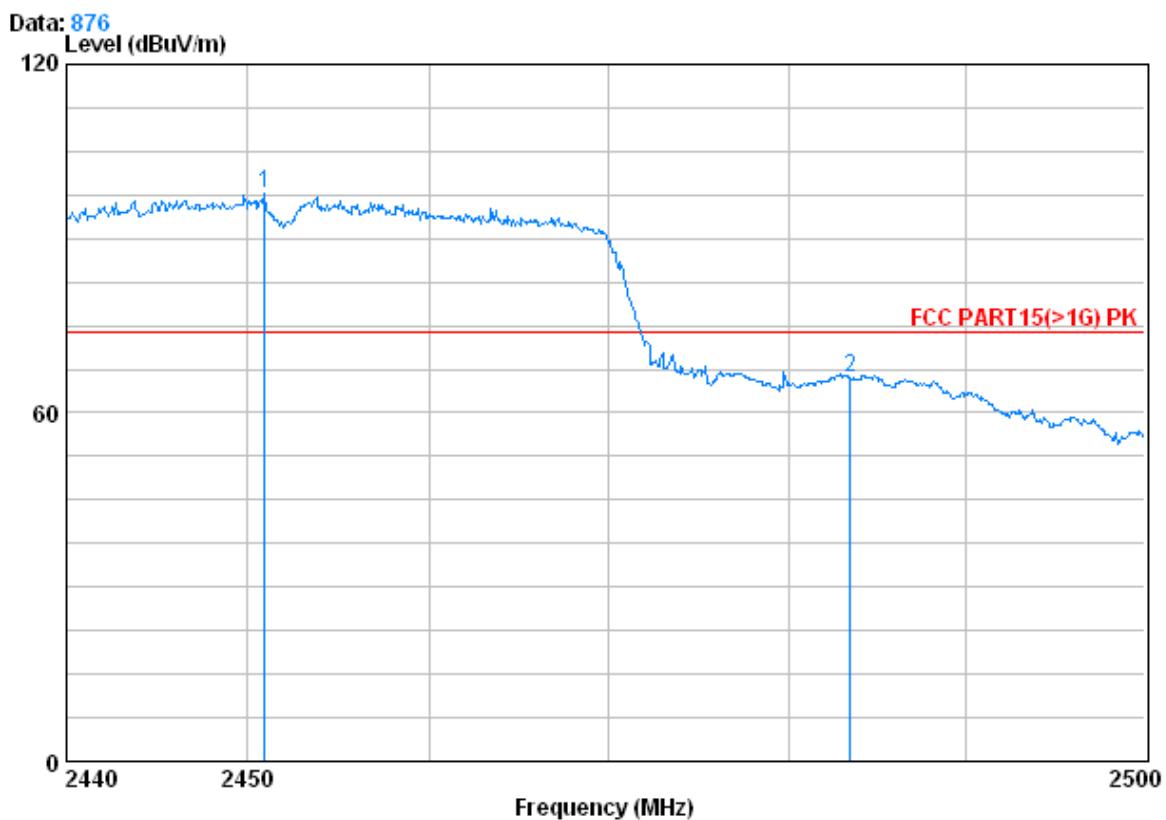


Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 0778RF

Test mode : N(HT40) 2452 Bandedge

	Cable	Antenna	Preamp	Read	Limit	Over		
	Freq	Loss	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2450.920	3.01	32.61	39.89	102.08	97.81	74.00	23.81
2	2483.500	3.03	32.67	39.92	70.15	65.93	74.00	-8.07

Worse case mode:	802.11n(HT40)	Test channel:	Highest	Remark:	Average	Vertical
------------------	---------------	---------------	---------	---------	---------	----------

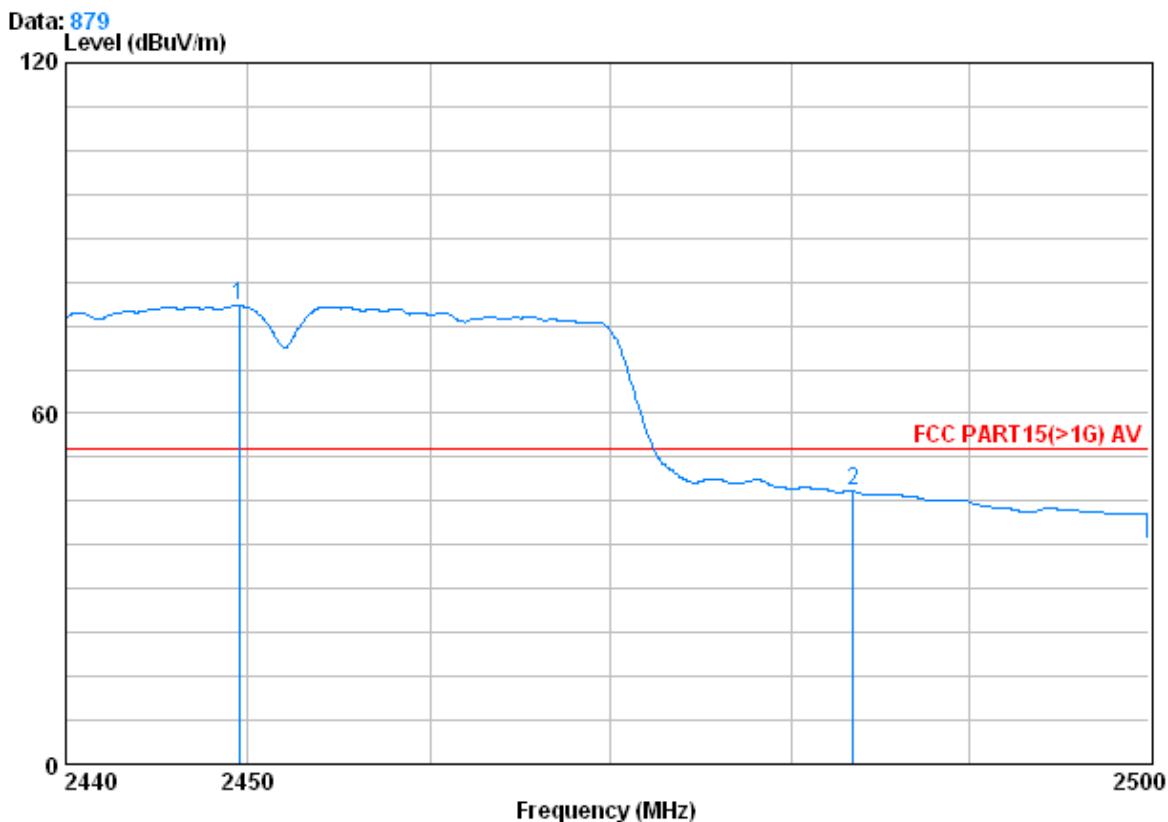


Condition : FCC PART15(&gt;1G) AV 3m VERTICAL

Job No. : 0778RF

Test mode : N(HT40) 2452 Bandedge

	Freq	Cable	Antenna	Preamp	Read	Limit	Over	
		Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2449.480	3.01	32.61	39.89	82.78	78.51	54.00	24.51
2	2483.500	3.03	32.67	39.92	50.85	46.64	54.00	-7.36

Worse case mode:	802.11n(HT40)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	---------------	---------------	---------	---------	---------	------------

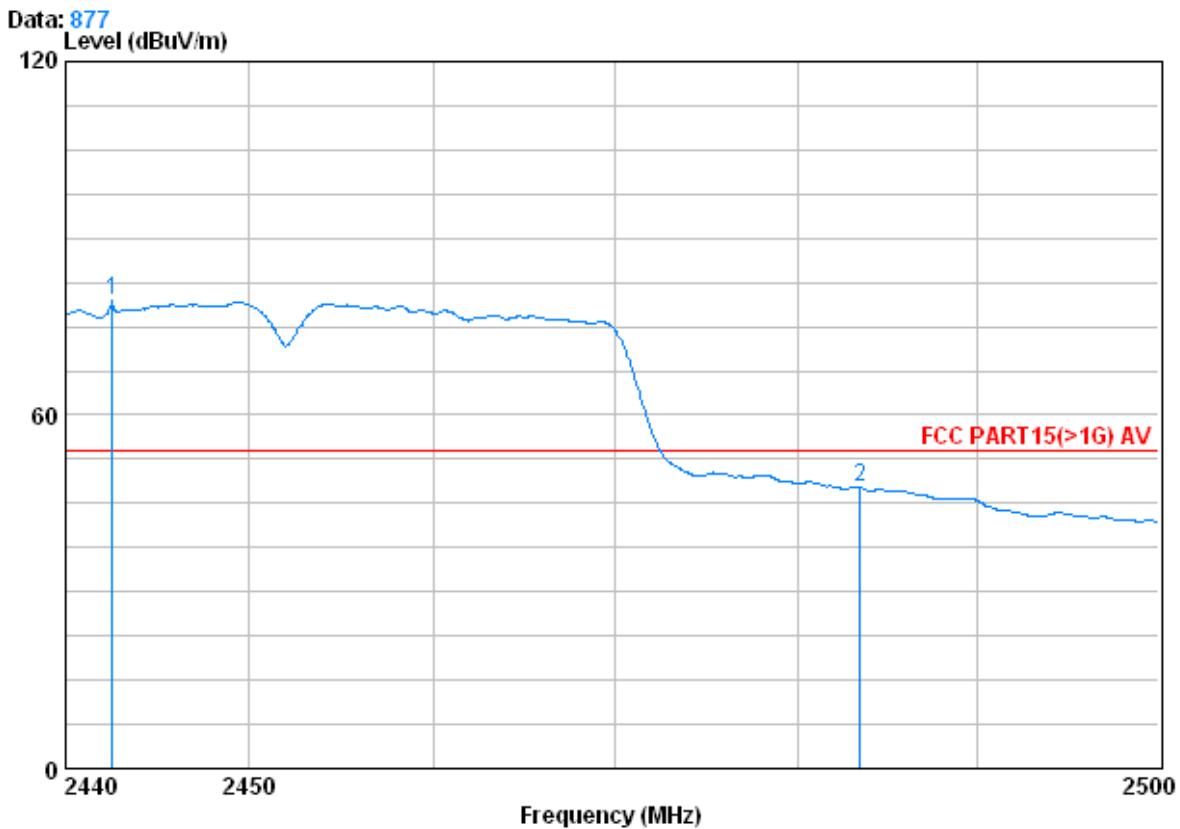

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 0778RF

Test mode : N(HT40) 2452 Bandedge

	Cable		Antenna	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level			
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2442.520	3.01	32.61	39.89	83.71	79.43	54.00	25.43
2	2483.500	3.03	32.67	39.92	51.88	47.66	54.00	-6.34

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor