

**HYUNDAI CALIBRATION & CERTIFICATION TECH. CO., LTD.**

Product Compliance Division, EMC Team  
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA  
TEL : +82 31 639 8518 FAX : +82 31 639 8525

**CERTIFICATION**

**Manufacture;**  
**CAS Corporation.**

**#19 Ganap-ri Gwangjuk-Myoun**  
**Yangju-gun Gyeonggi-do, Seoul Korea**

**CAS FRN : 0007-1276-16**

**Date of Issue : JULY 22, 2003**

**Test Report No.: HCT-F03-0708**

**Test Site: HYUNDAI CALIBRATION & CERTIFICATION**  
**TECHNOLOGIES CO., LTD.**

**HCT FRN : 0005-8664-21**

**FCC ID :**

**MODEL / TYPE :**

**QD8NB-2**

**nBody-EP/ Scales**

<b>Rule Part(s):</b>	<b>Part 15 &amp; 2</b>
<b>Equipment Class:</b>	<b>FCC Class B Peripheral Device (JBP)</b>
<b>Standard(s):</b>	<b>FCC Class B: 2001 (CISPR 22:1998)</b>
<b>EUT Type:</b>	<b>Scales</b>
<b>Model(s):</b>	<b>nBody-EP</b>
<b>Port/Connector(s)</b>	<b>USB Port</b>

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992 (Grant Notes: #19, #28).

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Report prepared by : Ki-Soo Kim

Manager of EMC Tech. Part

# TABLE OF CONTENTS

## PAGE

<b>REPORT COVER</b>	<b>1</b>
<b>TABLE OF CONTENTS</b>	<b>2</b>
<b>1.1 SCOPE</b>	<b>3</b>
<b>2.1 INTRODUCTION (SITE DESCRIPTION)</b>	<b>4</b>
<b>3.1 PRODUCTION INFORMATION</b>	<b>5</b>
<b>4.1 DESCRIPTION OF TESTS (CONDUCTED)</b>	<b>6</b>
<b>4.2 DESCRIPTION OF TESTS (RADIATED)</b>	<b>7</b>
<b>5.1 LIST OF SUPPORT EQUIPMENT</b>	<b>8-9</b>
<b>6.1 TEST DATA (CONDUCTED)</b>	<b>10-14</b>
<b>7.1 TEST DATA (RADIATED)</b>	<b>15</b>
<b>8.1 SMPLE CALCULATIONS</b>	<b>16</b>
<b>9.1 TEST EQUIPMENT</b>	<b>17</b>
<b>10.1 TEST SOFTWARE USED</b>	<b>18</b>
<b>11.1 CONCLUSION</b>	<b>19</b>
 <b>ATTACHMENT A: FCC ID LABEL &amp; LOCATION</b>	
 <b>ATTACHMENT B: EXTERNAL PHOTOGRAPHS</b>	
 <b>ATTACHMENT C: BLOCK DIAGRAM(S)</b>	
 <b>ATTACHMENT D: TEST SETUP PHOTOGRAPHS</b>	
 <b>ATTACHMENT E: USER'S MANUAL</b>	
 <b>ATTACHMENT F: INTERNAL PHOTOGRAPHS</b>	

## MEASUREMENT REPORT

### 1.1 SCOPE

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

<b>Applicant Name:</b>	CAS Corporation
<b>Address:</b>	#19 ganap-ri Gwangjuk-Myoun Yangju-gun Gyeonggi-do, Seoul Korea

- **FCC ID : QD8NB-2**
- Equipment Class: FCC Class B Peripheral Device (JBP)
- EUT Type: Scales
- Model(s): nBody-EP
- Cable(s): Unshielded
- Rule Part(s): FCC Part 15 Subpart B
- Test Procedure(s): ANSI C63.4 (1992)
- Dates of Tests: June 30, 2003 ~ July 3, 2003
- Place of Tests: 254-1,MAEKOK-RI,HOBUP-MYUN,ICHON-SI,KYOUNGKI-DO,467-701,KOREA

## **2.1 INTRODUCTION**

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-1992) was used in determining radiated and conducted emissions emanating from **CAS Corporation. Scales FCC ID: QD8NB-2**

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, MAEKOK-RI, HOBUP-MYUN, ICHON-SI, KYOUNGKI-DO, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 24, 2000 (Confirmation Number: EA90661)

## 3.1 PRODUCT INFORMATION

### (Equipment Description)

Equipment Under Test (EUT) is the CAS Corporation. ( Model : nBody-EP) Scales

FCC ID : QD8NB-2

Port(s)/Input Connector(s): USB Port

Cable(s): Unshielded

Dimensions (W×H×D): 420x510x112mm(W×H×D)

Weight (Net):12.5Kg

## 4.1 Description of Tests(Conducted)

### (Power line Conducted RFI (150kHz- 30MHz) )

The power line conducted RFI measurements were performed according to CISPR 22.

The EUT was placed on a non-conducting 1.0 by 1.5 meter table which is 0.8 meters in height and 0.40 meters away from the vertical wall of the shielded enclosure. Power to the EUT is provided through a Rohde & Schwarz 50  $\Omega$  / 50 uH Line Impedance Stabilization Network (LISN) and the support equipment through a separate Solar 50  $\Omega$  / 50 uH Line- Conducted Test Facility LISN. Sufficient time for the EUT, support equipment, and test equipment were allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME. The spectrum was scanned from 150kHz to 30 MHz. Each maximum EME was measured using an EMI receiver. The detector function of the receiver was set to CISPR quasi- peak and average mode with the bandwidth set to 9 kHz. Each emission was maximized consistent with the typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum Diagram emission. Excess cable lengths were bundled at the centre with 30- 40cm. in length. The worst-case configuration is noted in the test report and the photographs are attached. Each EME reported was calibrated using the Rohde & Schwarz SMX signal generator and are listed on Table 1. RFI Conducted FCC Class B

RFI CONDUCTED	FCC CLASS B Limits dB(uV/m)	CISPR 22 CLASS B Limits dB(uV/m)	
Freq. Range	FCC Class B Quasi-Peak	CISPR 22 Quasi-Peak	CISPR 22 Average
150kHz - 0.5MHz	48*	66-56**	56-46**
0.5MHz - 5MHz	48	56	46
5MHz - 30MHz	48	60	50
*FCC Class B limits starts from 450kHz			
**Limits decreases linearly with the logarithm of frequency			

Table 1. RFI Conducted Limits

## 4.2 Description of Tests(Radiated)

### (Radiated Emissions)

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The spectrum was scanned from 30 to 300 MHz using biconical antenna, 300 to 1000 MHz using log- periodic antenna, and above 1 GHz using linearly polarized horn antennas. Final measurements were made outdoors at 10-meter test range using Dipole antennas and EMI receiver. For frequencies above 1 GHz, horn antennas were used. Sufficient time for the EUT, support equipment, and test equipment were allowed in order for them to warm up to their normal operating condition. The EMI receiver detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120 kHz. The EUT, support equipment, and interconnecting cables were arranged to the configuration that produces the maximum EME emission found during preliminary scan. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Horizontal and vertical antenna polarizations were checked. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/ or support equipment, and powering the monitor the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission.

ITE Radiated Limits			
Frequency (MHz)	FCC Limit @ 3m. Quasi-Peak dB[μV/m]	FCC Limit @ 10m.* Quasi – Peak dB [μV/m]	CISPR Limit @ 10m. Quasi-Peak dB [μV/m]
30-88	40.0	29.5	30.0
88-216	43.5	33.0	30.0
216-230	46.0	35.6	30.0
230-960	46.0	35.6	37.0
960-1000	54.0	43.5	37.0
> 1000	54.0	43.5	No Specified Limit
* Limit extrapolated 20 dB/decade			

Table 2. Radiated Class B limits @ 10-meters

## 5.1 Support Equipment Used

DEVICE TYPE	MANUFACTURER	MODEL NUMBER	FCC ID / DoC	CONNECTED TO
SCALES (EUT)	CAS Corporation	nBody-EP	QD8NB-2	P.C
P.C	H.P	HP Pavilion 700	DoC	EUT
KEY BOARD	H.P	5181	DoC	P.C
MOUSE	Microsoft	Intellimouse optical USB And PS/2 compatible	DoC	P.C
SERIAL MOUSE	LOGITECH	M-M28	DZL 210365	P.C
PRINTER	H/P	C4569A	DoC	P.C
LCD MONITOR	CORNEA	CT1502	DoC	P.C



## 5.2 Cable Description

	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length
<b>SCALES (EUT)</b>	N/A	N	<b>2.8(D)</b>
<b>MONITOR</b>	N	Y	<b>1.8(P), 1.5(D)</b>
<b>PC(HOST)</b>	N	N	<b>1.8(P)</b>
<b>KEY BOARD</b>	N/A	Y	<b>1.5(D)</b>
<b>MOUSE</b>	N/A	Y	<b>1.5(D)</b>
<b>SERIAL MOUSE</b>	N/A	Y	<b>1.5(D)</b>
<b>PRINTER</b>	N	Y	<b>1.8(P),1.8(D)</b>

The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

## 5.3 Noise Suppression Parts on Cable. (I/O CABLE)

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
<b>SCALES(EUT)</b>	Y	<b>BOTH END</b>	Y	<b>BOTH END</b>
<b>MONITOR</b>	Y	<b>P.C END</b>	Y	<b>P.C END</b>
<b>KEY BOARD</b>	N	N/A	Y	<b>P.C END</b>
<b>MOUSE</b>	N	N/A	Y	<b>P.C END</b>
<b>PRINTER</b>	N	N/A	Y	<b>BOTH END</b>
<b>SERIAL MOUSE</b>	N	N/A	Y	<b>P.C END</b>


## 6.1 LINE-CONDUCTED TEST DATA

### HYUNDAI C-TECH. EMC Testing Laboratory

EUT: nBody-EP  
 Manufacturer: CAS  
 Operating Condition: NORMAL  
 Test Site: SHIELD ROOM  
 Operator: KH-YOON  
 Test Specification: CISPR 22 CLASS B  
 Comment: N  
 Start of Test: 6/30/03 / 11:31:38AM

#### SCAN TABLE: "CISPR 22 Voltage"

Short Description:		CISPR 22 Voltage					
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
Frequency	Frequency	Width					
150.0 kHz	500.0 kHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

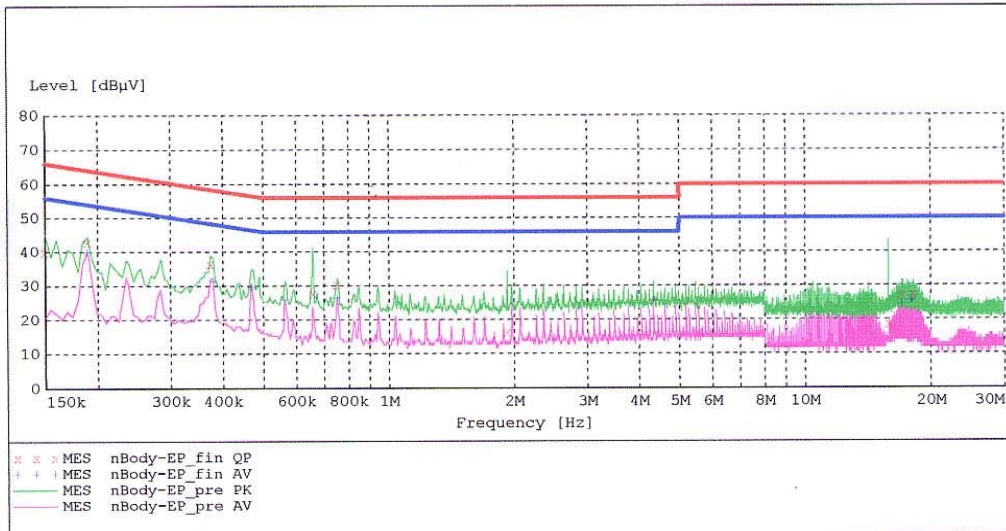

#### MEASUREMENT RESULT: "nBody-EP\_fin QP"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.150000	39.90	10.1	66	26.1	1	---
0.190000	42.90	10.1	64	21.1	1	---
0.375000	36.40	10.1	58	22.0	1	---
0.660000	27.70	10.2	56	28.3	1	---
0.755000	30.40	10.2	56	25.6	1	---
1.930000	16.30	10.3	56	39.7	1	---
15.950000	18.50	10.5	60	41.5	1	---
17.100000	27.20	10.5	60	32.8	1	---
18.235000	27.40	10.5	60	32.6	1	---

**MEASUREMENT RESULT: "nBody-EP\_fin AV"**

6/30/03 11:34AM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.190000	40.00	10.1	54	14.0	1	---
0.380000	31.50	10.1	48	16.8	1	---
0.470000	29.70	10.1	47	16.8	1	---
0.565000	26.10	10.1	46	19.9	1	---
0.755000	26.60	10.2	46	19.4	1	---
4.345000	25.70	10.3	46	20.3	1	---
17.100000	24.50	10.5	50	25.5	1	---
18.045000	25.70	10.5	50	24.3	1	---
18.140000	25.60	10.5	50	24.4	1	---

**HYUNDAI C-TECH.**  
**EMC Testing Laboratory**

EUT: nBody-EP  
 Manufacturer: CAS  
 Operating Condition: NORMAL  
 Test Site: SHIELD ROOM  
 Operator: KH-YOON  
 Test Specification: CISPR 22 CLASS B  
 Comment: H  
 Start of Test: 6/30/03 / 11:27:49AM

**SCAN TABLE: "CISPR 22 Voltage"**

Short Description:			CISPR 22 Voltage			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

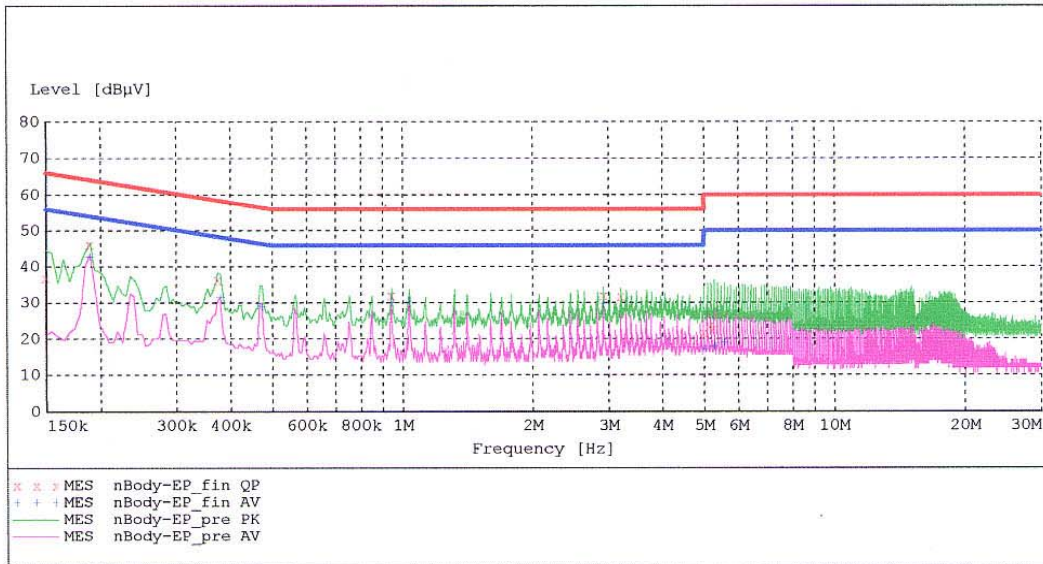
**MEASUREMENT RESULT: "nBody-EP\_fin QP"**

6/30/03 11:30AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.150000	36.90	10.1	66	29.1	1	---
0.190000	46.20	10.1	64	17.8	1	---
0.375000	36.30	10.1	58	22.1	1	---
0.945000	31.90	10.1	56	24.1	1	---
2.930000	31.90	10.2	56	24.1	1	---
3.210000	31.80	10.2	56	24.2	1	---
5.000000	21.60	10.3	56	34.4	1	---
5.190000	23.40	10.3	60	36.6	1	---
5.285000	22.70	10.3	60	37.3	1	---

**MEASUREMENT RESULT: "nBody-EP\_fin AV"**

6/30/03 11:30AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.190000	43.00	10.1	54	11.0	1	---
0.380000	31.70	10.1	48	16.5	1	---
0.475000	29.10	10.1	46	17.3	1	---
0.945000	30.00	10.1	46	16.0	1	---
1.040000	30.60	10.1	46	15.4	1	---
2.930000	29.70	10.2	46	16.3	1	---
5.000000	17.20	10.3	46	28.8	1	---
5.285000	18.00	10.3	50	32.0	1	---
5.570000	19.10	10.3	50	30.9	1	---

**NOTES:**

- 1. All modes of operation were investigated and the worst-case emissions are reported.**
- 2. The CISPR RFI conducted limits are listed on Table 1(Page 6).**
- 3. Line H = Phase Line N = Neutral**

---

**\*\* Measurements using CISPR quasi-peak and average mode.**

## 7.1 RADIATED TEST DATA

Frequency MHz	Reading dBuV	Ant. Factor dB/m	Cable Loss dB	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
36.4	6.7	16.5	1.3	V	24.5	30	-5.5
40.5	7.4	15.0	1.3	V	23.7	30	-6.3
71.6	16.7	6.2	1.8	V	24.7	30	-5.3
117.0	10.2	12.5	2.4	H	25.0	30	-5.0
128.9	9.7	13.5	2.6	H	25.8	30	-4.2
157.5	7.0	15.3	2.8	V	25.1	30	-4.9
257.7	11.0	17.6	3.7	H	32.3	37	-4.7
315.0	9.2	16.3	4.1	H	29.6	37	-7.4
337.7	10.1	16.4	4.2	V	30.7	37	-6.3
379.0	9.9	16.7	4.5	H	31.1	37	-5.9
443.9	9.3	18.2	4.8	V	32.3	37	-4.7
605.0	3.8	21.3	5.6	H	30.7	37	-6.3

Radiated Measurements at 10-meters.

### NOTES:

1. All modes of operation were investigated, and the worst-case emissions are reported.
2. The radiated limits are listed on Table 2 (Page 7).

\*\* AFCL = Antenna Factor (Schwarzbeck antenna) and Cable Loss .

\*\*\* Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used using a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

## 8.1 Sample Calculations

$$\text{dB } \square = 20 \log_{10} (\text{mV/m})$$

### 8.2 Example 1:

**@ 15.2 MHz**

Class B limit	= 250 $\mu\text{V}$ = 47.96 dB $\mu\text{V}$
Reading	= 33.4 dB $\mu\text{V}$ (calibrated level)

<b>Margin</b>	= 33.4 - 47.96 = - 14.56
	<b>= 14.6 dB below limit</b>

### 8.3 Example 2:

**@ 55.7 MHz**

Class B limit	= 100 $\mu\text{V/m}$ = 40.0 dB $\mu\text{V/m}$
Reading	= 21.3 dB $\mu\text{V/m}$ (calibrated level)
Antenna Factor + Cable Loss	= 11.1 dB
Total	= 32.4 dB $\mu\text{V/m}$

<b>Margin</b>	= 32.4 - 40.0 = - 7.6
	<b>= 7.6 dB below limit</b>



## 9.1 Test Equipment

<u>Type</u>	<u>Manufacture</u>	<u>Model Number</u>	<u>CAL Date</u>
EMI Test Receiver	Rohde & Schwarz	ESH3	2002.07.16
EMI Test Receiver	Rohde & Schwarz	ESVP	2002.10.01
EMI Test Receiver	Rohde & Schwarz	ESI40	2002.11.16
EMI Test Receiver	Rohde & Schwarz	ESVS30	2002.07.16
LISN	EMCO	3816/2	2002.11.29
LISN	EMCO	3816/2	2002.08.22
LISN	Rohde & Schwarz	ESH2-Z5	2002.08.15
LISN	EMCO	3825/2	2002.08.15
Amplifier	Hewlett-Packard	8447E	2002.08.23
Absorbing Clamp	Rohde & Schwarz	MDS-21	2003.04.24
Dipole Antennas	Schwarzbeck	VHAP	2002.07.16
Dipole Antennas	Schwarzbeck	UHAP	2002.07.16
Biconical Antenna	Schwarzbeck	VHA9103	2002.07.12
Log-Periodic Antenna	Schwarzbeck	UHALP9107	2002.07.12
Antenna Position Tower	HD	HD280	N/A
Turn Table	EMCO	1060-06	N/A
Power Analyzer	Voltech	PM 3300	2003.2.15
Reference Network Impedance	Voltech	IEC 555	N/A
AC Power Source	PACIFIC	Magnetic Module	N/A
AC Power Source	PACIFIC	360AMX	2002.11.25
Controller	HD GmbH	HD 100	N/A

## 10.1 Test Software Used

The EUT was self mode during radiated and conducted testing.

## **11.1 Conclusion**

The data collected shows that the CAS Corporation. Scales **FCC ID: QD8NB-2** complies with §15.107 and §15.109 of the FCC Rules.