

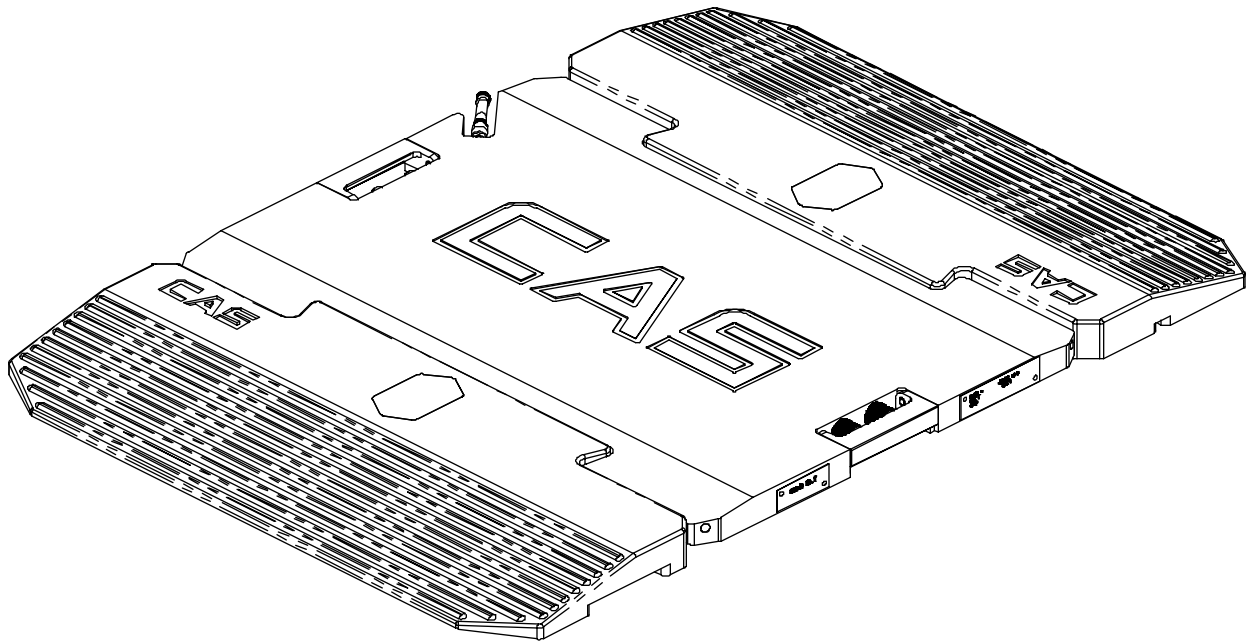
USER'S MANUAL

ATTACHMENT F

Road Weigher

MODEL : RW-10PRF

OWNER'S MANUAL



CAS

Federal Communications Commission Requirements

Warning : Changes or modifications not expressly approved by the party responsible for compliance with the FCC'S rules could void the user's authority to operate the equipment.

THIS DEVICE COMPLIES WITH PARTS 15 OF FCC RULES
OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS
(1)THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE,
AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE
RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE
UNDESIREO OPERATION.

Table of Contents

1. Introduction	3
2. Feature	4
3. Technical Specification	5
Ø Overview	
Ø Dimension	
Ø Specification	
4. Connection for Scale	8
5. Description	10

1. Introduction

We greatly appreciate your purchase of CAS Road Weigher, which is used for

displaying the value of weight loaded on each shaft of vehicle.

These goods have hold excellent performance and splendid properties through strike

tests as well as devoting ourselves under severe quality management.

Also, it is programmed on the basic of the user's convenience help display functions

to be used easily.

Before using road Weigher, It is recommended to read this manual carefully and to apply

the function application fully.

Refer to Indicator(RW-2601PRF) manual about weighing display.

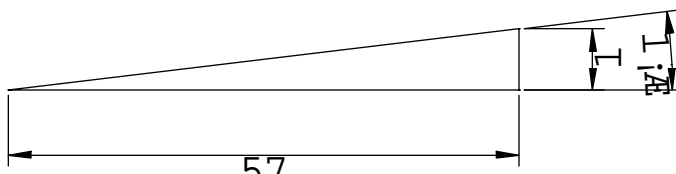
cautions

Ø Do not press the on/off keys hardly, for the keys are in operation with soft touch.

Ø Keep it in dry place.

Ø Floor Clint max $1/50(1^\circ)$

Ø Please weight vehicle in $1^\circ(1/57)$ slop.



Ø Do not use at the place with excessive electrical noises and vibration.

Ø Refer to page6 for weighing exactly in case of 2 axle.

2. Feature

- Ø Wireless data communication
- Ø Ease to install, because of radio frequency
- Ø Slim size
- Ø Portable type to carry easily

Option

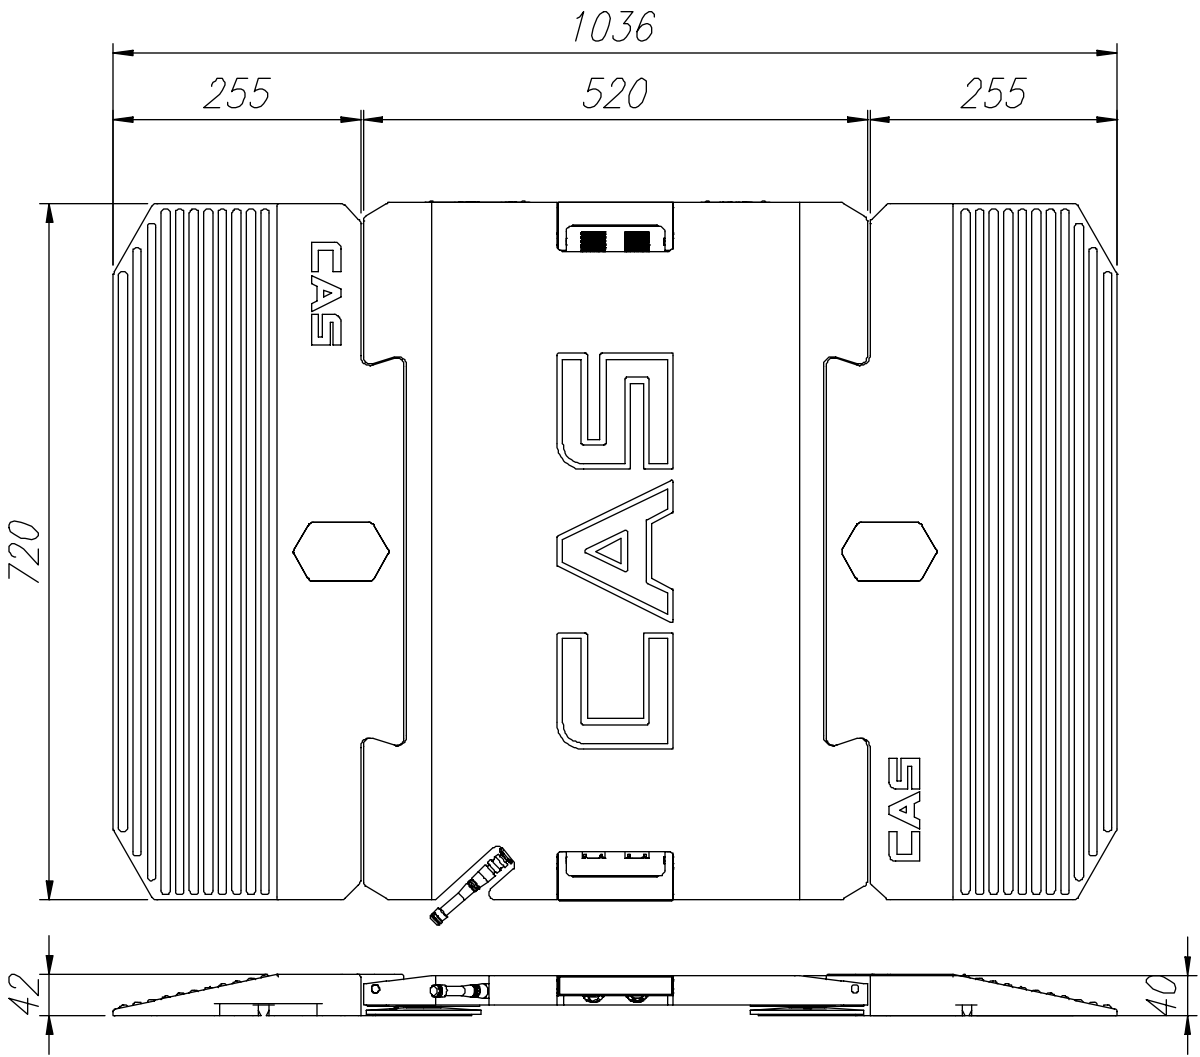
- Ø Dummy plate
- Ø PC Terminal

3. Technical Specification

- Ø Overview

























Dimension



Specification


No.	ITEM	SPEC
1	MODEL	RW-10PRF
2	Max	20,000 lb (10,000kg)
3	Division	10 lb (5kg)
4	Accuracy	0.1%
5	Size(mm)	(W)720·(L)520·(H)40
6	Power Source	Rechargeable Battery DC1.2V(Ni-MH) or Dry Battery 1.5V AA size BATTERY x 12EA
7	Operating Time	RW-10PRF : 15 hour(TX) , RW-2601PRF : 12 hour(RX)
8	Weight	29kg (RAMP 4.5kg/EA)
9	Function	Back Light , Zero , Tare , sum , Print
10	Frequency	903Mhz ~ 918.5Mhz
11	Channel	32 Channel
12	Channel interval	500kHz
13	Generating Power	Maximum 10mW
14	Communication method	FSK(Frequency Shift Keying fsk)
15	Comm. Speed	9600bps

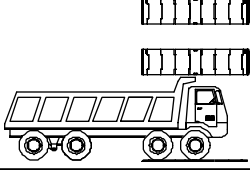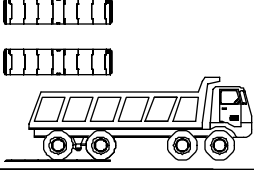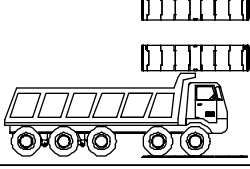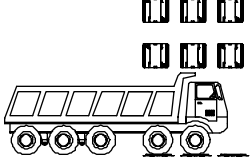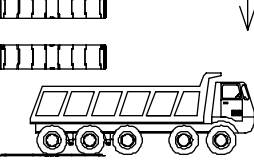4. Connection for Scale


classification		first weighing	2nd weighing	3rd weighing	4rd weighing
2 AXLE	2 PLATE				
	4 PLATE				
3 AXLE	2 PLATE & DUMMY				
	4 PLATE				
	6 PLATE				
4 AXLE	2 PLATE & DUMMY				
	4 PLATE				
5 AXLE	2 PLATE & DUMMY				
	6 PLATE				 ↓

5. Description

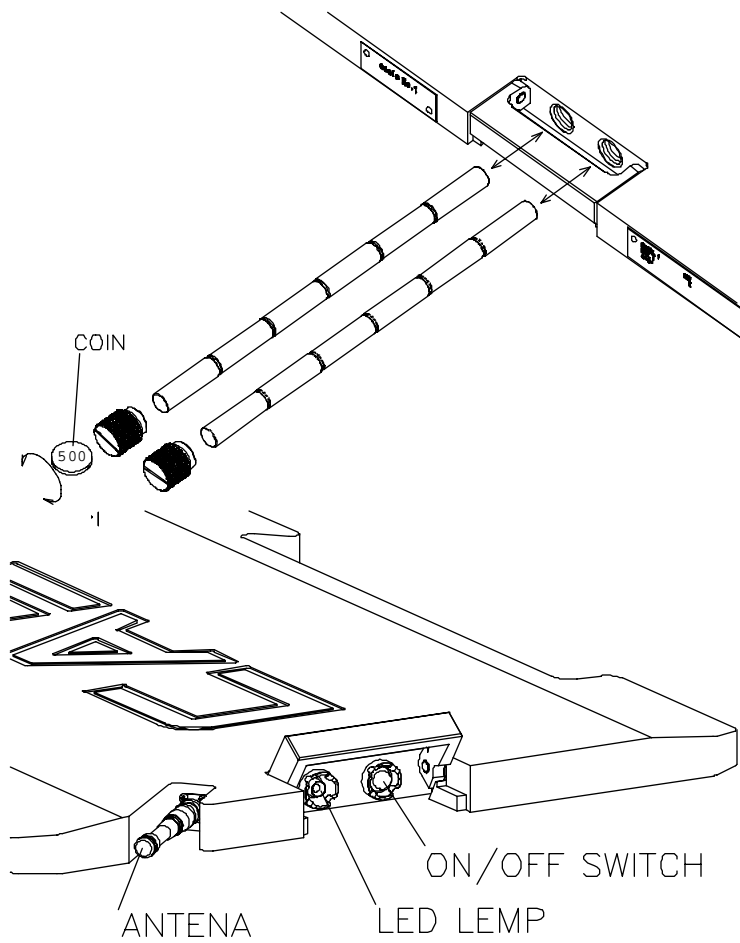Battery Exchange



ON/OFF Switch

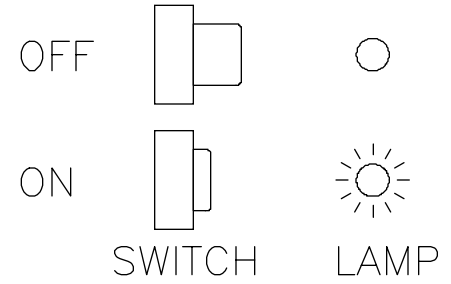

Handle for carrier

